

EMC Test Report
Application for Grant of Equipment Authorization
Industry Canada RSS-Gen Issue 3 / RSS 210 Issue 8
FCC Part 15 Subpart C

Model: SDC-WB40NBT

IC CERTIFICATION #: 6616A-SDCWB40NBT
FCC ID: TWG-SDCWB40NBT

APPLICANT: Summit Data Communications
526 South Main St. Suite 805
Akron, OH 44311

TEST SITE(S): Elliott Laboratories
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-3; 2845B-4, 2845B-5, 2845B-7

REPORT DATE: February 15, 2012

FINAL TEST DATES: October 19, 20 and 21 and November 19 and
24, 2010 and May 11, August 2, 4, 10, 12, 13,
16, 17, 18 19, 20, 23, 24, 26 and October 6, 7,
19, 20 and 26 and November 3, 4, 7, 8, 9, 15,
2011


TOTAL NUMBER OF PAGES: 144

PROGRAM MGR /
TECHNICAL REVIEWER:



Mark E Hill
Staff Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:



David Guidotti
Senior Technical Writer



Testing Cert #2016.01

Elliott Laboratories is accredited by the A2LA, certificate number 2016.01, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	2-15-2012	First release	

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE	5
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
TEST RESULTS SUMMARY	6
DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHZ).....	6
DIGITAL TRANSMISSION SYSTEMS (5725 –5850 MHZ).....	7
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS.....	8
MEASUREMENT UNCERTAINTIES.....	9
EQUIPMENT UNDER TEST (EUT) DETAILS.....	10
GENERAL.....	10
OTHER EUT DETAILS.....	10
ANTENNA SYSTEM	10
ENCLOSURE.....	10
MODIFICATIONS.....	10
SUPPORT EQUIPMENT.....	11
EUT INTERFACE PORTS	11
EUT OPERATION.....	11
TEST SITE.....	12
GENERAL INFORMATION.....	12
CONDUCTED EMISSIONS CONSIDERATIONS	12
RADIATED EMISSIONS CONSIDERATIONS	12
MEASUREMENT INSTRUMENTATION	13
RECEIVER SYSTEM	13
INSTRUMENT CONTROL COMPUTER	13
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	13
FILTERS/ATTENUATORS	14
ANTENNAS.....	14
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	14
INSTRUMENT CALIBRATION.....	14
TEST PROCEDURES	15
EUT AND CABLE PLACEMENT	15
CONDUCTED EMISSIONS.....	15
RADIATED EMISSIONS.....	16
CONDUCTED EMISSIONS FROM ANTENNA PORT	18
BANDWIDTH MEASUREMENTS	18
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	19
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN	19
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	20
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS	20
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS	21
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	21
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	21
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	22
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	23
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	24
APPENDIX B TEST DATA	28
END OF REPORT	144

SCOPE

An electromagnetic emissions test has been performed on the Summit Data Communications model SDC-WB40NBT, pursuant to the following rules:

Industry Canada RSS-Gen Issue 3
RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003
FCC DTS Measurement Procedure KDB558074 D01, Dated 1/18/2012

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Summit Data Communications model SDC-WB40NBT complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 3
RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Summit Data Communications model SDC-WB40NBT and therefore apply only to the tested sample. The sample was selected and prepared by Ron Seide of Summit Data Communications.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY**DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 210 A8.2	Digital Modulation	Systems uses OFDM / DSSS techniques	System must utilize a digital transmission technology	Complies
15.247 (a) (2)	RSS 210 A8.2 (1)	6dB Bandwidth	802.11b: 9.0MHz 802.11g: 15.1MHz 802.11n20: 15.1MHz	>500kHz	Complies
15.247 (b) (3)	RSS 210 A8.2 (4)	Output Power (multipoint systems)	802.11b: 15.2dBm (0.033 Watts) 802.11g: 12.6dBm (0.018 Watts) 802.11n20: 9.5dBm (0.009W) EIRP = 0.066 W ^{Note 1}	1Watt, EIRP limited to 4 Watts.	Complies
15.247(d)	RSS 210 A8.2 (2)	Power Spectral Density	802.11b: -5.3dBm/3kHz 802.11g: -11.8dBm/3kHz 802.11n20: -14.4dBm/3kHz	8dBm/3kHz	Complies
15.247(c)	RSS 210 A8.5	Antenna Port Spurious Emissions 30MHz – 25 GHz	All spurious emissions < -30dBc	< -30dBc ^{Note 2}	Complies
15.247(c) / 15.209	RSS 210 A8.5	Radiated Spurious Emissions 30MHz – 25 GHz	53.9dBμV/m @ 2497.6MHz (-0.1dB)	15.207 in restricted bands, all others <-30dBc ^{Note 2}	Complies
Note 1: EIRP calculated using antenna gain of 3.0 dBi for the highest EIRP system.					
Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst).					

DIGITAL TRANSMISSION SYSTEMS (5725 –5850 MHz)

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 210 A8.2	Digital Modulation	Systems uses OFDM / DSSS techniques	System must utilize a digital transmission technology	Complies
15.247 (a) (2)	RSS 210 A8.2 (1)	6dB Bandwidth	802.11a: 15.0MHz 802.11n20: 16.8MHz	>500kHz	Complies
15.247 (b)	RSS 210 A8.2 (4)	Output Power (multipoint systems)	802.11a: 7.9dBm (0.006 Watts) 802.11n20: 10.6dBm (0.012 Watts) EIRP = 0.052 W ^{Note 1}	1Watt, EIRP limited to 4 Watts.	Complies
15.247(d)	RSS 210 A8.2 (2)	Power Spectral Density	802.11a: -11.8dBm/3kHz 802.11n20: -10.2dBm/3kHz	Maximum permitted is 8dBm/3kHz	Complies
15.247(c)	RSS 210 A8.5	Antenna Port Spurious Emissions – 30MHz – 40 GHz	All spurious emissions < -30dBc	< -30dBc ^{Note 2}	Complies
15.247(c) / 15.209	RSS 210 A8.5 Table 2, 3	Radiated Spurious Emissions 30MHz – 40 GHz	53.8dB μ V/m @ 11608.7MHz (-0.2dB)	15.207 in restricted bands, all others <-30dBc ^{Note 2}	Complies
<p>Note 1: EIRP calculated using antenna gain of 6.5 dBi for the highest EIRP system multi-point system.</p> <p>Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst).</p>					

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	EUT uses u.FL connectors	Unique or integral antenna required	Complies
15.207	RSS GEN Table 2	AC Conducted Emissions	32.7dB μ V @ 0.457MHz (-14.1dB)	Refer to page 19	Complies
15.109	RSS GEN 7.2.3 Table 1	Receiver spurious emissions	49.0dB μ V/m @ 2994.7MHz (-5.0dB)	Refer to page 20	Complies
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to MPE calculations in Exhibit 11, RSS 102 declaration and User Manual statements.	Refer to OET 65, FCC Part 1 and RSS 102	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual		Statement required regarding non-interference	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual		Statement for products with detachable antenna	Complies
-	RSP 100 RSS GEN 4.4.1	99% Bandwidth	802.11b: 12.8MHz 802.11g: 16.7MHz 2.4GHz, 802.11n20: 17.9MHz 802.11a: 16.9MHz 5GHz, 802.11n20: 18.2MHz	Information only	N/A

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Summit Data Communications model SDC-WB40NBT is an 802.11abgn 1x1 with Bluetooth 2.1 module.

The sample was received on October 19, 2010 and tested on October 19, 20 and 21 and November 19 and 24, 2010 and May 11, August 2, 4, 10, 12, 13, 16, 17, 18 19, 20, 23, 24, 26 and October 6, 7, 19, 20 and 26 and November 3, 4, 7, 8, 9, 15, 2011. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Summit	SDC-WB40NBT	802.11abgn 1x with BT	Prototype	TWG-SDCWB40NBT

OTHER EUT DETAILS

The EUT supports single transmit chain operation. The EUT supports 20MHz operation only.

ANTENNA SYSTEM

Monopole Antenna - 2.4 and 5GHz bands - Huber+Suhner, SOA 2459/360/5/0/V_C, 3dBi (2.4GHz), 6.5dBi (5GHz)

Dipole Antenna #1 - 2.4 and 5GHz bands - Larsen, R380.500.314, 1.6dBi (2.4GHz), 5dBi (5GHz)

Dipole Antenna #2 - 2.4 GHz only - Cisco Air-Ant 4941 2dBi(2.4GHz)

Magnetic Dipole - 2.4GHz and 5GHz bands – Ethertronics, 2.5dBi (2.4GHz), 5dBi (5GHz)

In the 2.4GHz range, the Huber+Suhner (H&S), Cisco and Ethertronics antennas were tested as they represented the highest gain antennas of each available type.

In the 5GHz range, the H&S, Larsen, and Ethertronics antennas were tested as they represented the highest gain antennas of each available type.

The antenna connects to the EUT via a non-standard u.FL antenna connector, thereby meeting the requirements of FCC 15.203.

ENCLOSURE

The EUT has no enclosure. It is designed to be installed within the enclosure of a host computer.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Lenovo	Inspiron 1545	Laptop Computer (Note 1)	953R2K1	DoC
GME	GFP181U-A330	AC/DC Adapter (Note 2)	1005-000194	-
-	-	Battery Pack (Note 3)	-	-

Note 1 - Used to configure the EUT and then disconnected prior to testing

Note 2 – Used for AC conducted emissions only

Note 3 – Used for radiated spurious emissions tests

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s)	
			Shielded or Unshielded	Length(m)
AC/DC Adapter – DC out	WB40	2wire	Unshielded	1.5m
Battery Pack	WB40	2wire	Unshielded	0.1m

EUT OPERATION

During testing, the EUT was configured to transmit continuously at the lowest data rate for the mode as this resulted in the highest output power.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 3	769238	2845B-3	41039 Boyce Road Fremont, CA 94538-2435
Chamber 4	211948	2845B-4	
Chamber 5	211948	2845B-5	
Chamber 7	A2LA accreditation	2845B-7	

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4:2003. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

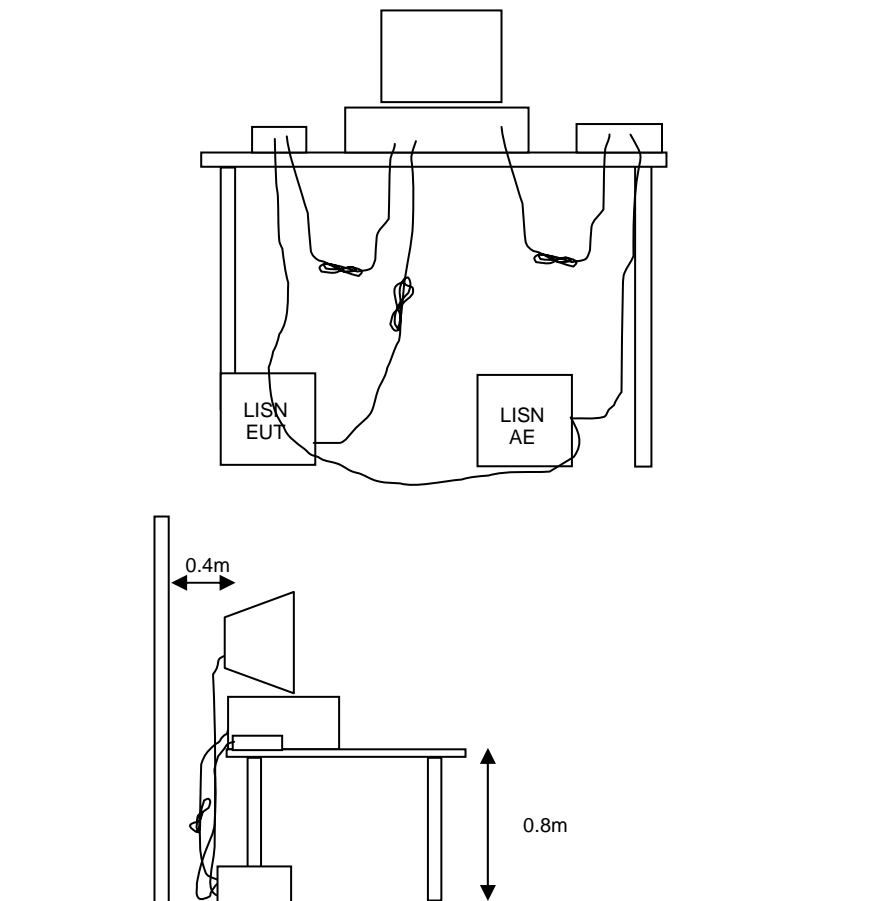


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

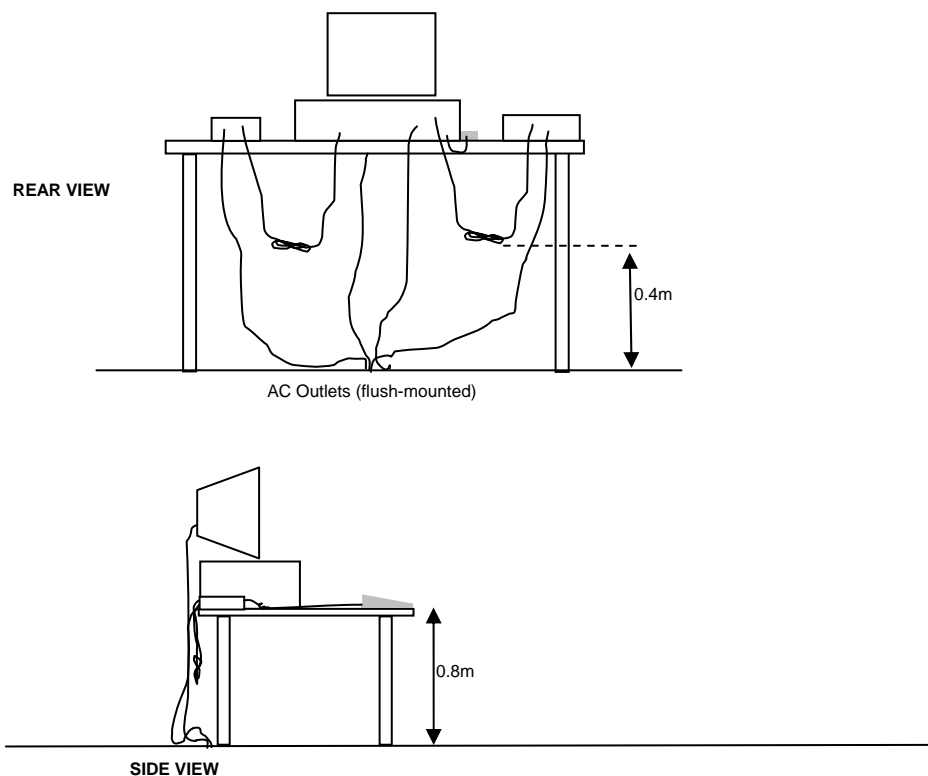


Typical Test Configuration for Radiated Field Strength Measurements

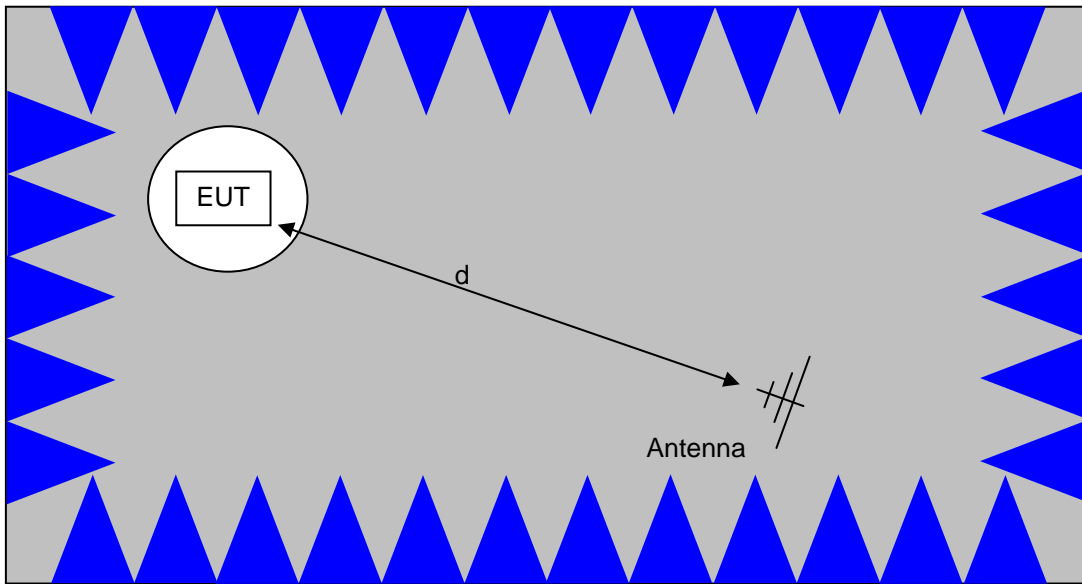

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

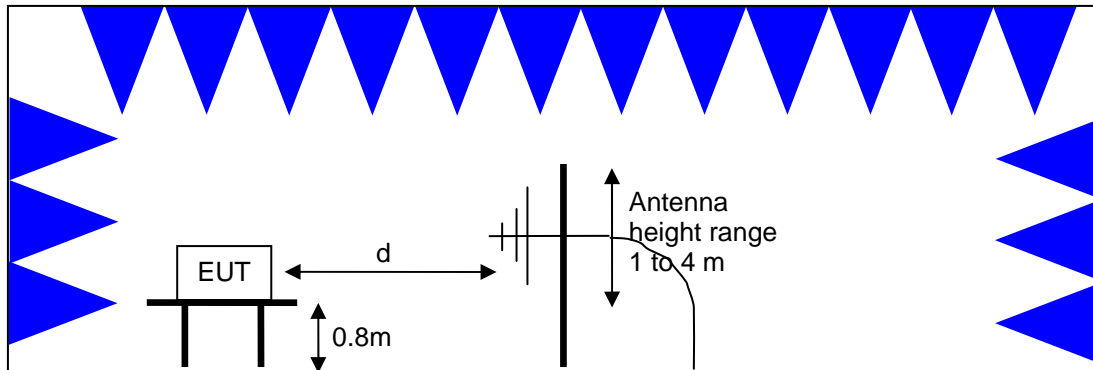

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

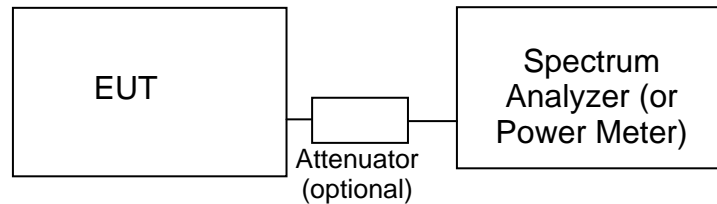**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and Elliott's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
902 – 928	1 Watt (30 dBm)	8 dBm/3kHz
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3kHz
5725 – 5850	1 Watt (30 dBm)	8 dBm/3kHz

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{d} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data**Radiated Emissions, 1000 - 26,500 MHz, 19-Oct-10**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	5/26/2011
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/11/2011
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	7/12/2011

TX Spurious Emissions, 20-Oct-10

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	5/26/2011
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/11/2011
Hewlett Packard	Head (Inc W1-W4, 1143, 2198) Red	84125C	1145	1/13/2011
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	7/12/2011
A.H. Systems	Spare System Horn, 18-40GHz	SAS-574, p/n: 2581	2162	1/19/2011
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2249	10/11/2011

Radio (Radiated BE), 21-Oct-10

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/8/2012
Rohde & Schwarz	Power Meter, Single Channel	NRVS	1422	11/10/2011
Rohde & Schwarz	Power Sensor 100 uW - 10 Watts	NRV-Z53	1555	2/5/2011
Rohde & Schwarz	Attenuator, 20 dB , 50 ohm, 10W, DC-18 GHz	20dB, 10W, Type N	1556	2/5/2011
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	1771	8/26/2011

Radiated Emissions, 1000 - 26,500 MHz, 11-May-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	5/26/2011
EMCO	Antenna, Horn, 1-18 GHz (SA40-Blu)	3115	1386	9/21/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	5/14/2011
Hewlett Packard	Head (Inc W1-W4, 1742 , 1743) Blue	84125C	1620	5/9/2012
A.H. Systems	Blue System Horn, 18-40GHz	SAS-574, p/n: 2581	2159	3/23/2012
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2249	10/11/2011

Radiated Emissions, 1000 - 26,000 MHz, 02-Aug-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	12/8/2011
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/2/2012
Hewlett Packard	Head (Inc flex cable, 1143, 2198) Red	84125C	1145	2/17/2012
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	8/12/2011
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1683	8/10/2011
A.H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	2/9/2012

Radiated Emissions, 30 - 26,500 MHz, 10-Aug-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	12/8/2011
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/8/2012
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	8/12/2011
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2238	10/1/2011

Radiated Emissions, 30 - 40,000MHz, 19-Aug-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	12/8/2011
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/2/2012
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	9/12/2011
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	2241	10/1/2011

Radiated Spurious Emissions, 1 - 26.5 GHz, 19-Aug-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	12/8/2011
EMCO	Antenna, Horn, 1-18 GHz	3115	487	7/6/2012
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2238	10/1/2011

Radiated Emissions, 1000 - 18,000 MHz, 20-Aug-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	12/8/2011
EMCO	Antenna, Horn, 1-18 GHz	3115	487	7/6/2012
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2238	10/1/2011
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	7/28/2012

Radiated Emissions, 1000 - 26,500 MHz, 23-Aug-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	5/18/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	8/9/2012
EMCO	Antenna, Horn, 1-18 GHz	3115	1561	6/22/2012
Hewlett Packard	Head (Inc W1-W4, 1742 , 1743) Blue	84125C	1620	5/9/2012
A.H. Systems	Blue System Horn, 18-40GHz	SAS-574, p/n: 2581	2159	3/23/2012
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2249	10/11/2011

Radio Antenna Port (Power and Spurious Emissions), 23-Aug-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	7/28/2012

Radio Antenna Port (Power and Spurious Emissions), 24-Aug-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	8/9/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	11/2/2011

Radiated Emissions, 1000 - 26,500 MHz, 03-Nov-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	12/8/2011
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/2/2012
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	8/15/2012

Radio Antenna Port (Power and Spurious Emissions), 04-Nov-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	8/15/2012

Radiated Spurious Emissions, 1000 - 18,000 MHz, 04-Nov-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	5/18/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	8/9/2012
EMCO	Antenna, Horn, 1-18 GHz	3115	1561	6/22/2012
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	2241	10/4/2012

Radio Antenna Port (Power and Spurious Emissions), 04-Nov-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	8/9/2012

Radiated Emissions, 1000 - 18,000 MHz, 07-Nov-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Narda West	High Pass Filter, 8 GHz	HPF 180	821	3/23/2012
EMCO	Antenna, Horn, 1-18 GHz (SA40-Blu)	3115	1386	9/21/2012
Hewlett Packard	Microwave Preamplifier, 1- 26.5GHz	8449B	2199	2/23/2012
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	2241	10/4/2012
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	7/28/2012

Radiated Emissions, 1000 - 4000MHz, 08-Nov-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1- 26.5GHz	8449B	263	12/8/2011
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/2/2012
Hewlett Packard	Head (Inc flex cable, 1143, 2198) Red	84125C	1145	2/17/2012
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	8/15/2012
A.H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	2/9/2012

Radiated Emissions, 1000 - 4000MHz, 09-Nov-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1- 26.5GHz	8449B	263	12/8/2011
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/2/2012
Hewlett Packard	Head (Inc flex cable, 1143, 2198) Red	84125C	1145	2/17/2012
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	8/15/2012
A.H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	2/9/2012

Conducted Emissions - AC Power Ports, 16-Dec-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	LISN, 10 kHz-100 MHz, 25A	3825/2	1292	3/1/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	4/6/2012

Appendix B Test Data

T80878 Pages 29 – 134

T83198 Pages 135 - 143

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		-
Emissions Standard(s):	FCC 15.247/RSS-210	Class:	-
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Summit Data Communications

Model

SDC-WB40 (1x1 802.11abg + BT 2.1)

Date of Last Test:

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

New Module #2011-1296, Laptop #2011-2312, Linux Shell

Run #	Mode	Channel	Antenna	Power Setting	Test Performed	Limit	Result / Margin
Run #1	802.11b Chain A	#1 2412MHz	H&S	-	Restricted Band Edge at 2390 MHz	15.209	44.0dB μ V/m @ 2387.3MHz (-10.0dB)
		#11 2462MHz	H&S	-	Restricted Band Edge at 2483.5 MHz	15.209	53.9dB μ V/m @ 2497.6MHz (-0.1dB)
Run # 2	802.11g Chain A	#1 2412MHz	H&S	-	Restricted Band Edge at 2390 MHz	15.209	48.1dB μ V/m @ 2390.0MHz (-5.9dB)
		#11 2462MHz	H&S	-	Restricted Band Edge at 2483.5 MHz	15.209	52.3dB μ V/m @ 2483.5MHz (-1.7dB)
Run # 3	802.11n20 Chain A	#1 2412MHz	H&S	-	Restricted Band Edge at 2390 MHz	15.209	47.9dB μ V/m @ 2390.0MHz (-6.1dB)
		#11 2462MHz	H&S	-	Restricted Band Edge at 2483.5 MHz	15.209	45.9dB μ V/m @ 2483.5MHz (-8.1dB)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:
 Temperature: 20-25 °C
 Rel. Humidity: 40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1, Band Edge Field Strength - 802.11b, Chain A

Run #1a, EUT on Channel #1 2412MHz - 802.11b, Chain A

Date of Test: 11/2/2011


Test Location: FT Chamber#5

Test Engineer: Joseph Cadigal


Config Change: none

2390 MHz Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2387.330	44.0	V	54.0	-10.0	AVG	37	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.930	52.8	V	74.0	-21.2	PK	37	1.0	RB 1 MHz;VB 3 MHz;Pk
2350.070	38.5	H	54.0	-15.5	AVG	320	1.0	RB 1 MHz;VB 10 Hz;Pk
2357.930	49.8	H	74.0	-24.2	PK	320	1.0	RB 1 MHz;VB 3 MHz;Pk

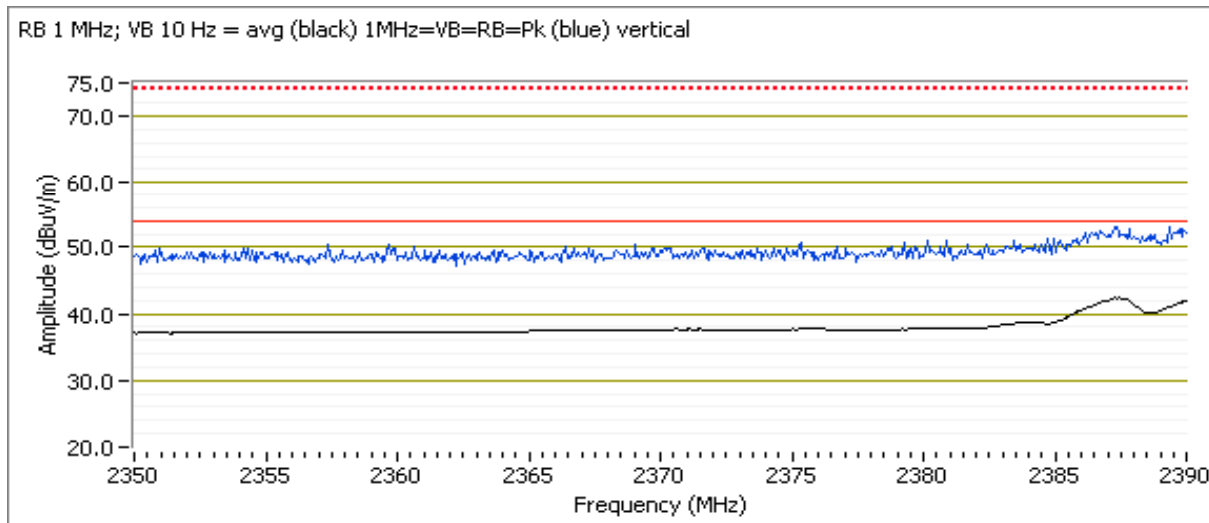

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

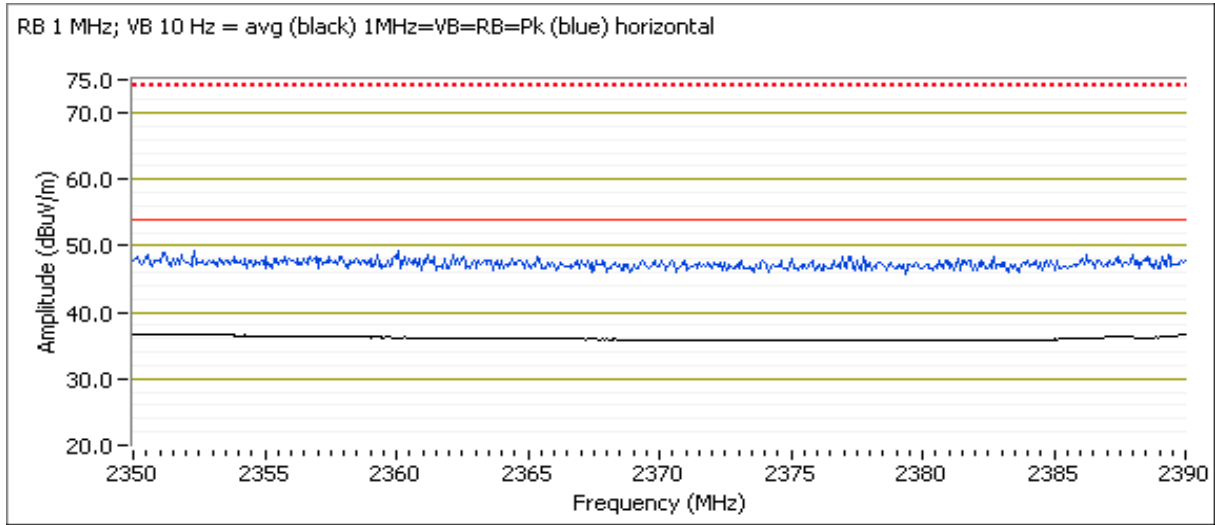

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A


Run #1b, EUT on Channel #11 2462MHz - 802.11b, Chain A

Date of Test: 8/18/2011
Test Engineer: Joseph Cadigal

Test Location: FT Chamber#7
Config Change: none

2483.5 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2497.580	53.9	V	54.0	-0.1	AVG	96	1.0	RB 1 MHz;VB 10 Hz;Pk
2497.640	58.9	V	74.0	-15.1	PK	96	1.0	RB 1 MHz;VB 3 MHz;Pk
2483.500	39.2	H	54.0	-14.8	AVG	58	1.4	RB 1 MHz;VB 10 Hz;Pk
2486.850	46.0	H	74.0	-28.0	PK	58	1.4	RB 1 MHz;VB 3 MHz;Pk

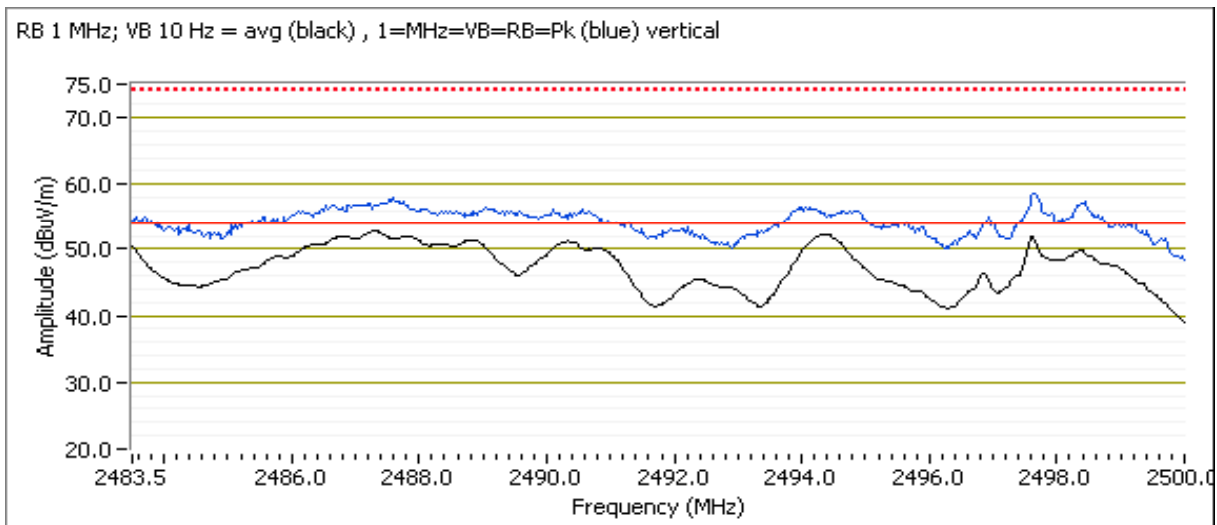

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 2, Band Edge Field Strength - 802.11g, Chain A

Date of Test: 11/2/2011

Test Location: FT Chamber#5

Test Engineer: Joseph Cadigal


Config Change: none

Run # 2a, EUT on Channel #1 2412MHz - 802.11g, Chain A


2390 MHz Band Edge Signal Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2390.000	48.1	V	54.0	-5.9	AVG	37	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.870	63.3	V	74.0	-10.7	PK	37	1.0	RB 1 MHz;VB 3 MHz;Pk
2390.000	40.1	H	54.0	-13.9	AVG	311	1.7	RB 1 MHz;VB 10 Hz;Pk
2389.800	52.3	H	74.0	-21.7	PK	311	1.7	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz = avg (black) 1MHz=VB=RB=Pk (blue) vertical

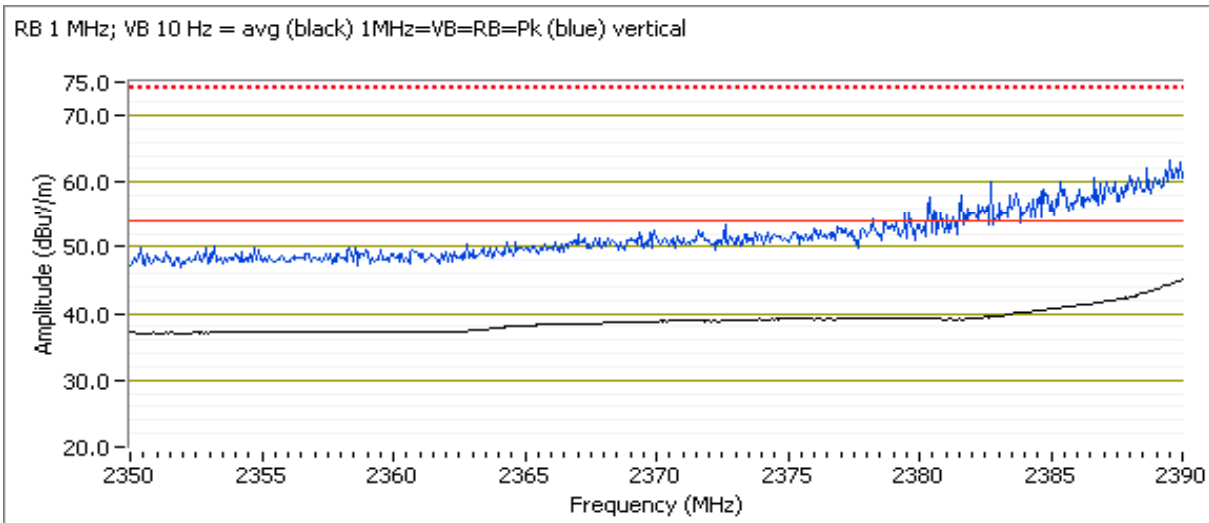

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

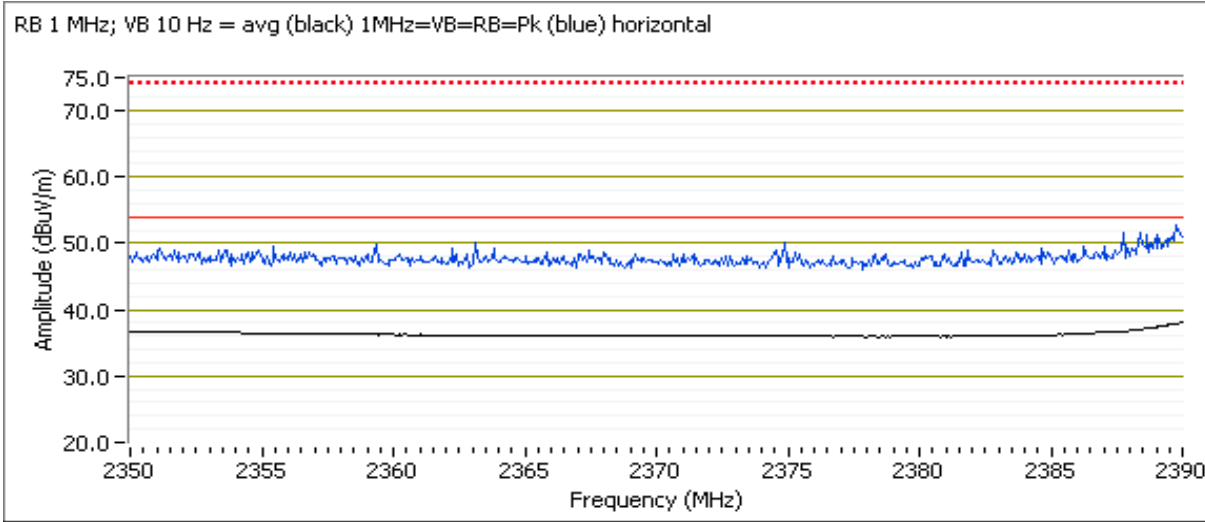

Run # 2b, EUT on Channel #11 2462MHz - 802.11g, Chain A

Date of Test: 11/2/2011
 Test Engineer: Joseph Cadigal


Test Location: FT Chamber#5
 Config Change: none

2483.5 MHz Band Edge Signal Radiated Field Strength


Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2483.500	52.3	V	54.0	-1.7	AVG	44	1.0	RB 1 MHz;VB 10 Hz;Pk
2483.890	69.6	V	74.0	-4.4	PK	44	1.0	RB 1 MHz;VB 3 MHz;Pk
2483.860	41.3	H	54.0	-12.7	AVG	61	1.0	RB 1 MHz;VB 10 Hz;Pk
2484.100	54.6	H	74.0	-19.4	PK	61	1.0	RB 1 MHz;VB 3 MHz;Pk

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

RB 1 MHz; VB 10 Hz = avg (black) 1MHz=VB=RB=Pk (blue) vertical

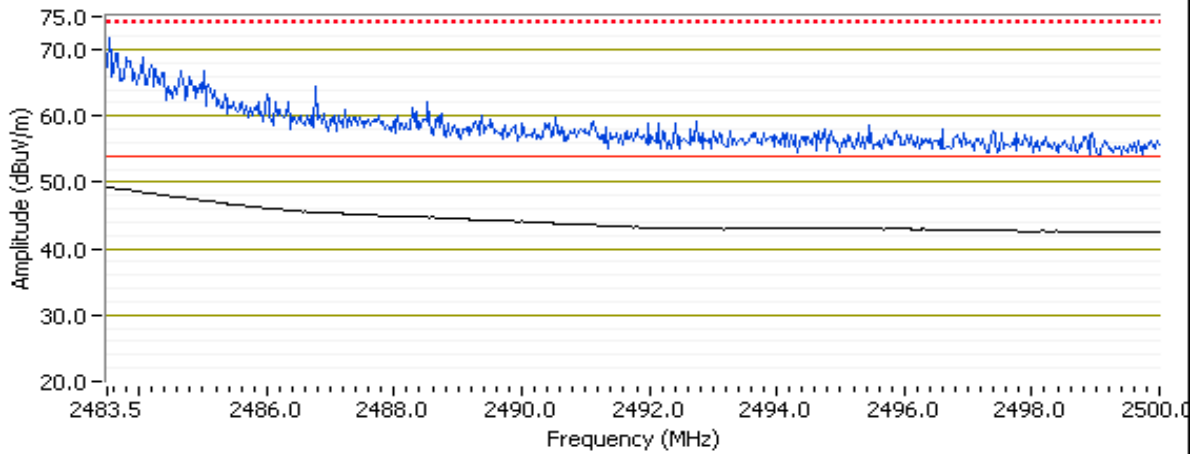

RB 1 MHz; VB 10 Hz = avg (black) 1MHz=VB=RB=Pk (blue) horizontal

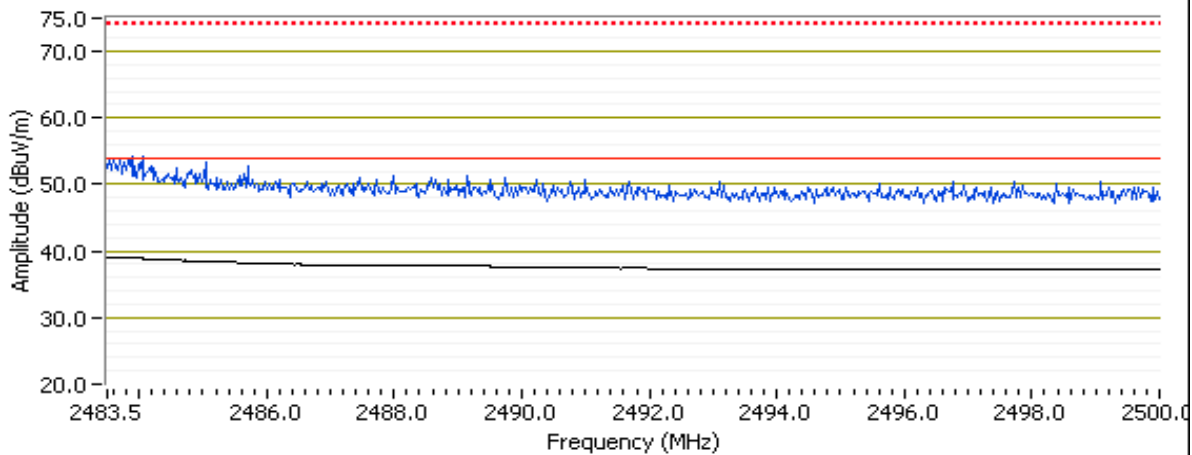

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3, Band Edge Field Strength - 802.11n20, Chain A


Date of Test: 8/19/2011
Test Engineer: John Caizzi

Test Location: FT5
Config Change: none

Run # 3a, EUT on Channel #1, 2412MHz - 802.11n20, Chain A

2390 MHz Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2390.000	47.9	V	54.0	-6.1	AVG	213	1.05	
2389.400	62.5	V	74.0	-11.5	PK	213	1.05	

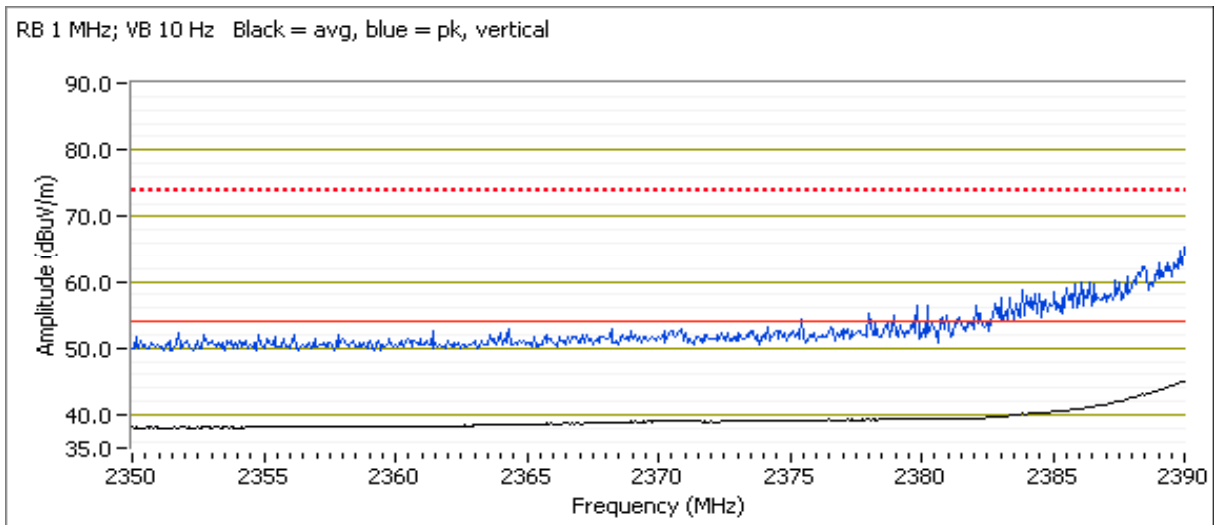


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3b, EUT on Channel #11 2462MHz - 802.11n20, Chain A

2483.5 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2483.500	45.9	V	54.0	-8.1	AVG	215	1.25	
2485.230	59.9	V	74.0	-14.1	PK	215	1.25	

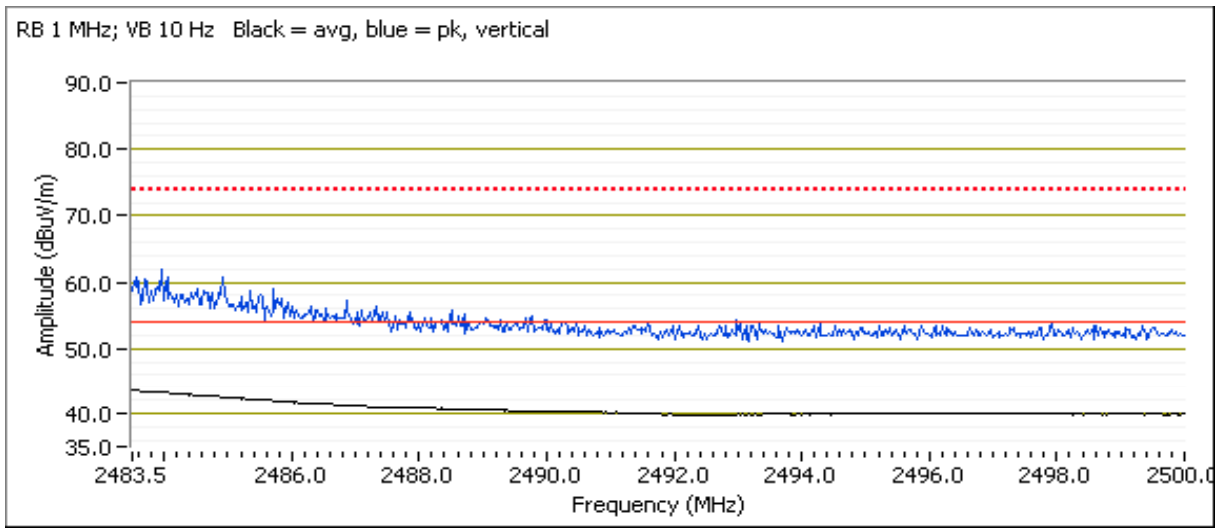

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

New Module #2011-1296, Laptop #2011-2312, Linux Shell

Run #	Mode	Channel	Antenna	Power Setting	Test Performed	Limit	Result / Margin
Run #1	802.11b Chain A	#1 2412MHz	H&S	-	Radiated Emissions, 1 - 26 GHz	FCC 15.209 / 15.247	53.1dBµV/m @ 4823.9MHz (-0.9dB)
		#6 2437MHz		-			53.7dBµV/m @ 4873.9MHz (-0.3dB)
		#11 2462MHz		-			53.0dBµV/m @ 4924.0MHz (-1.0dB)

Scans on center channel in both OFDM modes to determine the worst case

Run # 2	802.11g Chain A	#6 2437MHz	H&S	-	Radiated Emissions, 1 - 26 GHz	FCC 15.209 / 15.247	47.2dBµV/m @ 2989.2MHz (-6.8dB)
	802.11n20 Chain A	#6 2437MHz		-			48.3dBµV/m @ 2989.2MHz (-5.7dB)

Top and bottom channels in worst case OFDM mode:

Run # 3	802.11n20 Chain A	#1 2412MHz	H&S	-	Radiated Emissions, 1 - 26 GHz	FCC 15.209 / 15.247	47.7dBµV/m @ 2994.8MHz (-6.3dB)
		#11 2462MHz		-			48.1dBµV/m @ 2994.8MHz (-5.9dB)

Receiver Spurious Emissions

Run # 4	Receive	#6, Chain A	H&S	-	Radiated Emissions, 1 - 7.5 GHz	RSS 210	48.2dBµV/m @ 2994.7MHz (-5.8dB)
---------	---------	-------------	-----	---	------------------------------------	---------	------------------------------------

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature:	20-25 °C
Rel. Humidity:	40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Notes:

Preliminary testing showed no emissions below 1 GHz related to the radio
 Antenna: H&S

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1, Radiated Spurious Emissions, 1-26GHz, 802.11b, Chain A


Run #1a, EUT on Channel #1 2412MHz - 802.11b, Chain A

Date of Test: 11/2/2011 Test Location: FT5
 Test Engineer: Joseph Cadigal Config Change: none

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4823.940	53.1	V	54.0	-0.9	AVG	270	2.5	RB 1 MHz;VB 10 Hz;Pk
2994.710	44.3	V	54.0	-9.7	AVG	166	1.0	RB 1 MHz;VB 10 Hz;Pk, note 1
5242.240	39.4	V	54.0	-14.6	AVG	157	1.0	RB 1 MHz;VB 10 Hz;Pk, note 1
1594.970	59.1	V	74.0	-14.9	PK	153	1.0	RB 1 MHz;VB 3 MHz;Pk
4824.040	55.5	V	74.0	-18.5	PK	270	2.5	RB 1 MHz;VB 3 MHz;Pk
5244.370	53.0	V	74.0	-21.0	PK	157	1.0	RB 1 MHz;VB 3 MHz;Pk, note 1
1593.410	30.7	V	54.0	-23.3	AVG	153	1.0	RB 1 MHz;VB 10 Hz;Pk
2994.770	49.4	V	74.0	-24.6	PK	166	1.0	RB 1 MHz;VB 3 MHz;Pk, note 1

Note 1: Signal is not in restricted band, but the lower restricted band limit was used.

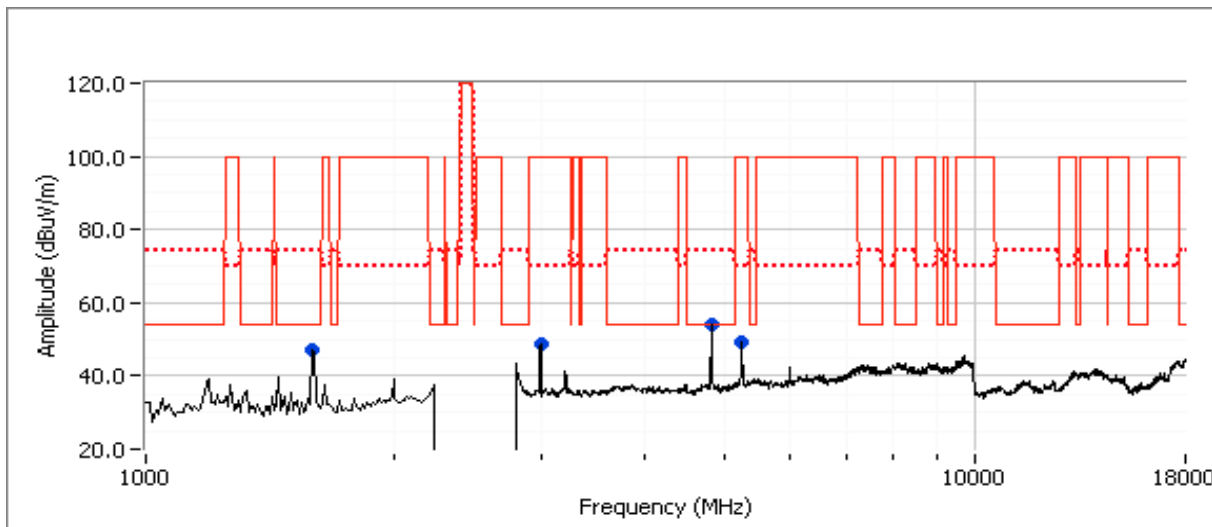

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1b: EUT on Channel #6 2437MHz - 802.11b, Chain A

Date of Test: 8/19/2011

Test Location: FT5


Test Engineer: John Caizzi

Config Change: none

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2989.170	48.2	V	54.0	-5.8	Peak	201	1.0	Note 3
5253.330	46.3	V	54.0	-7.7	Peak	270	1.0	Note 3
4873.930	53.7	V	54.0	-0.3	AVG	272	1.87	
4873.970	55.3	V	74.0	-18.7	PK	272	1.87	
1189.400	43.9	H	54.0	-10.1	AVG	159	1.86	
1195.200	42.7	H	74.0	-31.3	PK	159	1.86	
1597.160	33.4	V	54.0	-20.6	AVG	158	1.00	
1593.100	53.2	V	74.0	-20.8	PK	158	1.00	

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
Note 2:	Scans made between 18 - 26GHz with the measurement antenna moved around the card and its antennas 20-50 cm from the device indicated there were no significant emissions in this frequency range.
Note 3:	Signal is not in restricted band, but the lower restricted band limit was used.

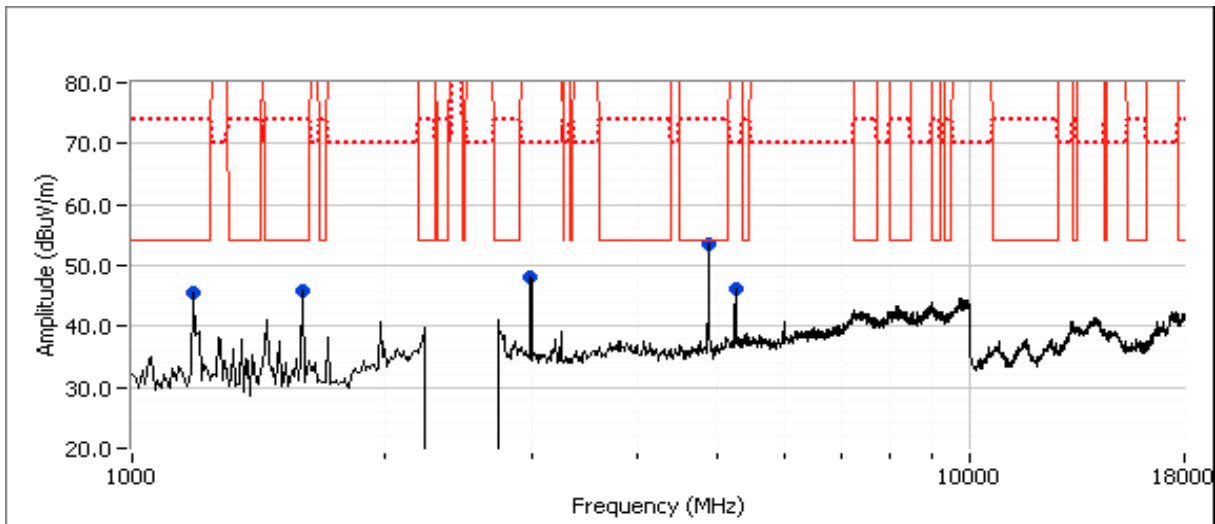

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1c: EUT on Channel #11, 2462MHz - 802.11b, Chain A

Date of Test: 8/19/2011

Test Location: FT5


Test Engineer: John Caizzi

Config Change: none

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2989.170	48.5	V	54.0	-5.5	Peak	197	1.0	Note 3
5244.170	44.0	V	54.0	-10.0	Peak	214	1.0	Note 3
4923.950	53.0	V	54.0	-1.0	AVG	76	1.63	
4923.950	54.6	V	74.0	-19.4	PK	76	1.63	
1585.540	37.3	H	54.0	-16.7	AVG	41	1.06	
1598.340	38.9	H	74.0	-35.1	PK	41	1.06	
1189.060	38.3	V	54.0	-15.7	AVG	264	1.00	
1196.660	46.4	V	74.0	-27.6	PK	264	1.00	

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
Note 3:	Signal is not in restricted band, but the lower restricted band limit was used.

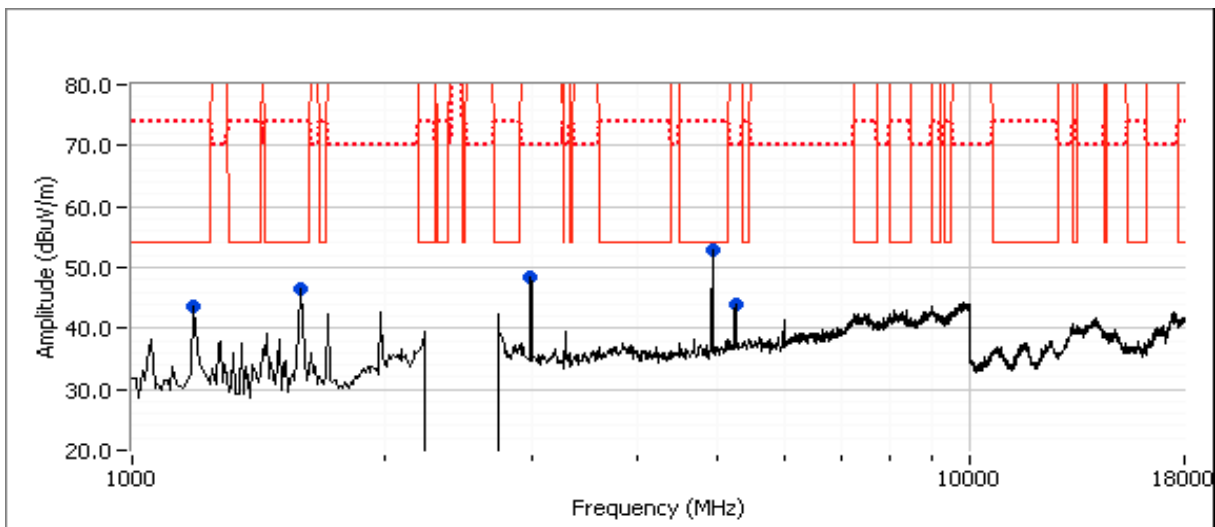

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 2, Radiated Spurious Emissions, 1-26GHz, 802.11g, 802.11n20, Chain A
 Date of Test: 8/19/2011 Test Location: FT5
 Test Engineer: John Caizzi Config Change: none


Run # 2a, EUT on Channel #6 2437MHz - 802.11g, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2989.170	47.2	V	54.0	-6.8	Peak	128	1.3	Note 2
1189.200	44.6	V	54.0	-9.4	AVG	73	1.00	
5244.170	43.5	V	54.0	-10.5	Peak	268	1.0	Note 2
4874.500	37.3	V	54.0	-16.7	AVG	261	1.61	
1189.000	37.2	V	54.0	-16.8	AVG	206	1.00	
1585.430	35.2	V	54.0	-18.8	AVG	204	1.00	
1594.830	54.7	V	74.0	-19.3	PK	204	1.00	
4874.270	49.0	V	74.0	-25.0	PK	261	1.61	
1196.530	48.0	V	74.0	-26.0	PK	206	1.00	
1198.200	45.4	V	74.0	-28.6	PK	73	1.00	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 2: Signal is not in restricted band, but the lower restricted band limit was used.

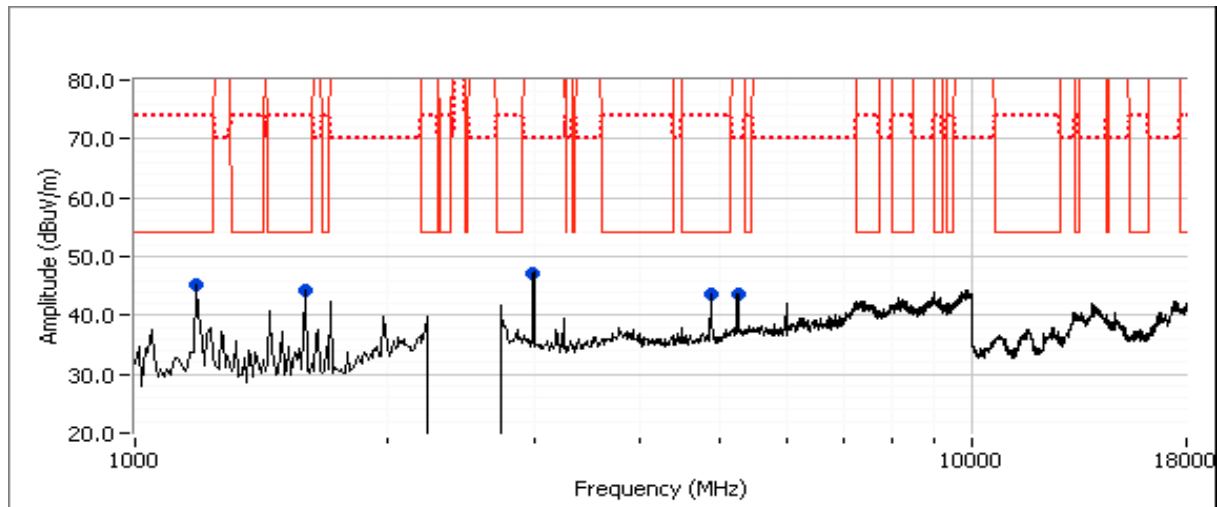


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 2b: EUT on Channel #6 2437MHz - 802.11n20, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2989.170	48.3	V	54.0	-5.7	Peak	201	1.0	Note 3
1188.800	44.4	H	54.0	-9.6	AVG	322	1.26	
5235.000	43.6	V	54.0	-10.4	Peak	266	1.0	Note 3
4875.870	34.0	V	54.0	-20.0	AVG	247	1.00	
1597.300	32.8	V	54.0	-21.2	AVG	152	1.00	
1595.560	52.1	V	74.0	-21.9	PK	152	1.00	
4868.300	45.9	V	74.0	-28.1	PK	247	1.00	
1189.970	43.2	H	74.0	-30.8	PK	322	1.26	

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
- Note 2: Scans made between 18 - 26GHz with the measurement antenna moved around the card and its antennas 20-50 cm from the device indicated there were no significant emissions in this frequency range
- Note 3: Signal is not in restricted band, but the lower restricted band limit was used.

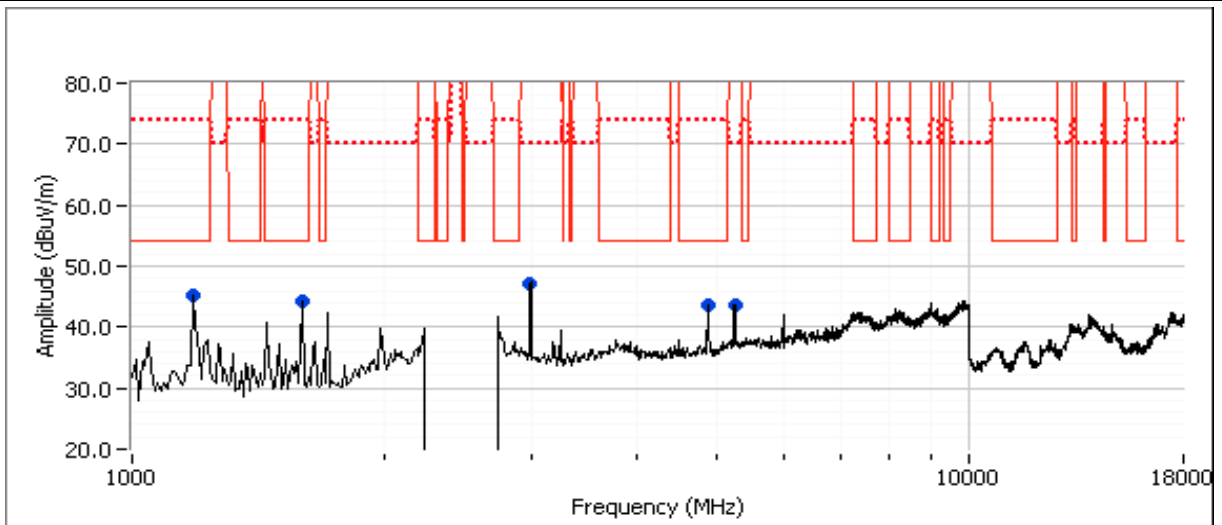

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3, Radiated Spurious Emissions, 1-26GHz, 802.11n20, Chain A

Date of Test: 8/19/2011

Test Location: FT Chamber #5

Test Engineer: Rafael Varelas

Config Change: None


Run # 3a, EUT on Channel #1 2412MHz - 802.11n20, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2994.840	47.7	V	54.0	-6.3	Peak	191	1.3	Note 3 - peak vs average limit
1188.890	39.0	V	54.0	-15.0	AVG	238	1.0	RB 1 MHz;VB 10 Hz;Pk
4822.950	37.1	V	54.0	-16.9	AVG	239	1.0	RB 1 MHz;VB 10 Hz;Pk
1596.650	51.5	V	74.0	-22.5	PK	32	1.2	RB 1 MHz;VB 3 MHz;Pk
4819.690	49.2	V	74.0	-24.8	PK	239	1.0	RB 1 MHz;VB 3 MHz;Pk
1597.400	28.8	V	54.0	-25.2	AVG	32	1.2	RB 1 MHz;VB 10 Hz;Pk
1190.990	37.5	V	74.0	-36.5	PK	238	1.0	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Signal is not in restricted band, but the lower restricted band limit was used.

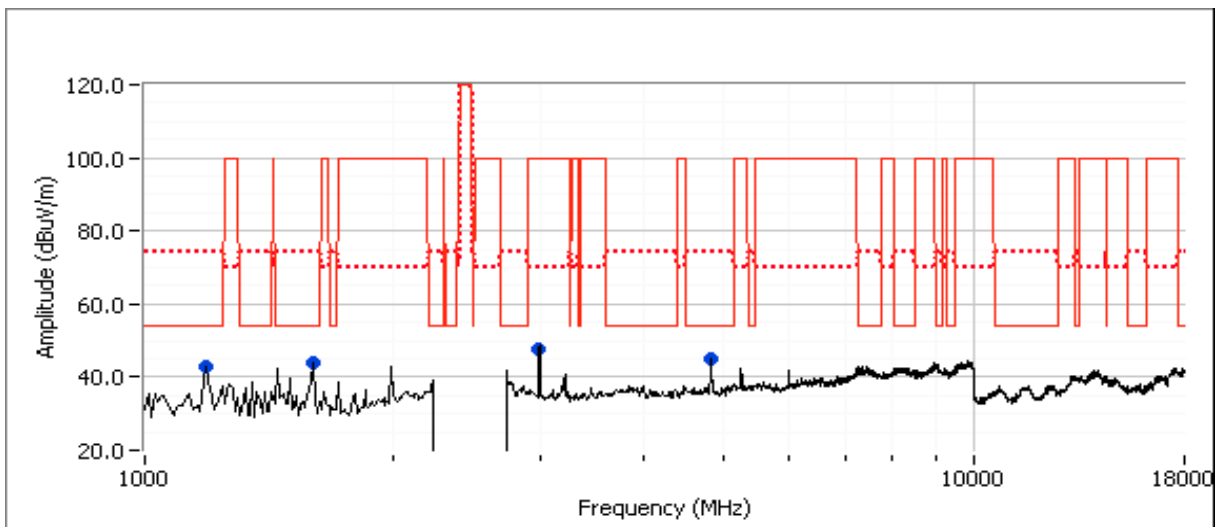

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A


Run # 3c : , EUT on Channel #11 2462MHz - 802.11g, Chain A

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2994.760	48.1	V	54.0	-5.9	Peak	199	1.0	Note 3 - peak vs average limit
1188.890	41.1	V	54.0	-12.9	AVG	351	1.0	RB 1 MHz;VB 10 Hz;Pk
4922.740	36.9	V	54.0	-17.1	AVG	88	1.2	RB 1 MHz;VB 10 Hz;Pk
1597.240	35.0	V	54.0	-19.0	AVG	206	1.0	RB 1 MHz;VB 10 Hz;Pk
1596.280	54.6	V	74.0	-19.4	PK	206	1.0	RB 1 MHz;VB 3 MHz;Pk
4923.890	48.9	V	74.0	-25.1	PK	88	1.2	RB 1 MHz;VB 3 MHz;Pk
1186.610	39.8	V	74.0	-34.2	PK	351	1.0	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Signal is not in restricted band, but the lower restricted band limit was used.

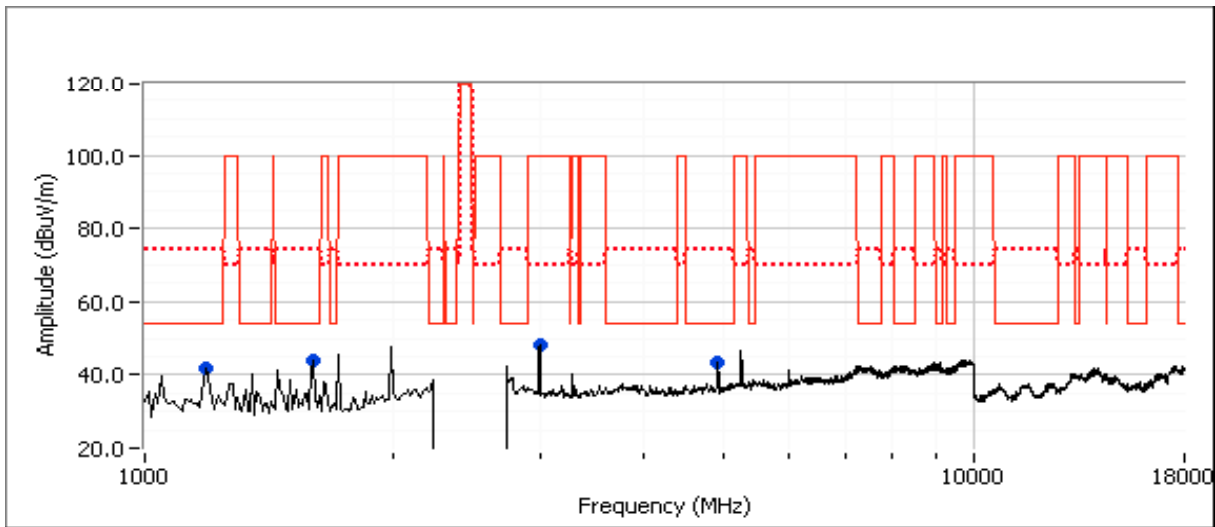

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 4, Radiated Spurious Emissions, 1-7.5GHz, Receive, Chain A

Date of Test: 8/19/2011


Test Location: FT Chamber #5

Test Engineer: Rafael Varelas

Config Change: None

Run # 4a, EUT on Channel #6 2437MHz - Receive, Chain A

Frequency MHz	Level dB μ V/m	Pol v/h	RSS 210		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2994.670	48.2	V	54.0	-5.8	AVG	196	1.0	RB 1 MHz;VB 10 Hz;Pk
2994.740	52.2	V	74.0	-21.8	PK	196	1.0	RB 1 MHz;VB 3 MHz;Pk
5239.920	37.4	V	54.0	-16.6	AVG	270	1.0	RB 1 MHz;VB 10 Hz;Pk
5242.450	53.0	V	74.0	-21.0	PK	270	1.0	RB 1 MHz;VB 3 MHz;Pk
1598.250	31.4	V	54.0	-22.6	AVG	145	1.0	RB 1 MHz;VB 10 Hz;Pk
1598.940	46.8	V	74.0	-27.2	PK	145	1.0	RB 1 MHz;VB 3 MHz;Pk
1188.780	41.8	H	54.0	-12.2	AVG	131	1.0	RB 1 MHz;VB 10 Hz;Pk
1187.650	45.3	H	74.0	-28.7	PK	131	1.0	RB 1 MHz;VB 3 MHz;Pk

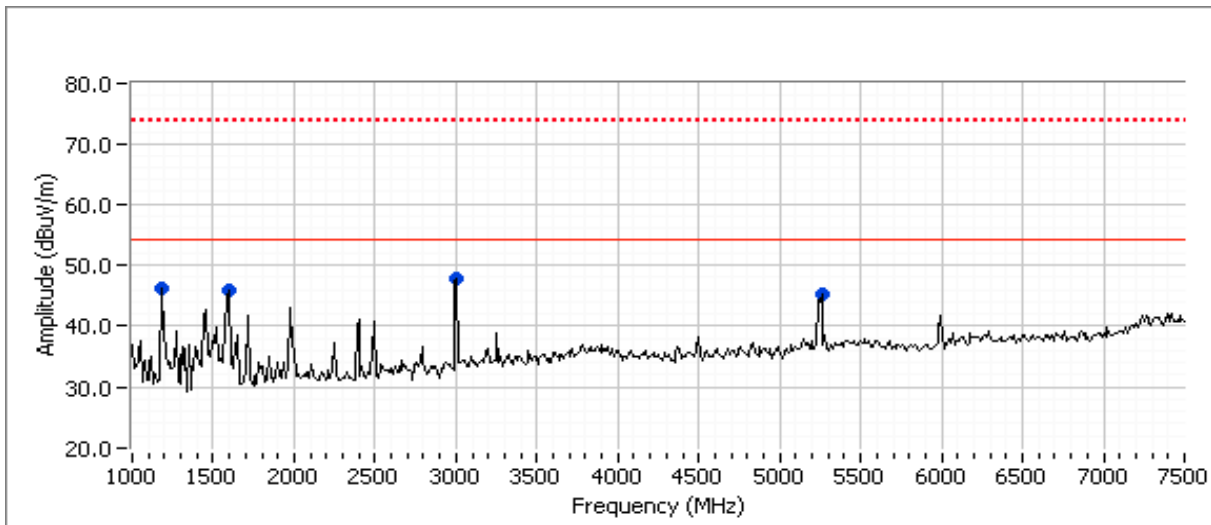

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

New Module #2011-1296, Laptop #2011-2312, Linux Shell

Run #	Mode	Channel	Antenna	Power Setting	Test Performed	Limit	Result / Margin
Run #1	802.11b Chain A	#1 2412MHz	Ethertronic s	-	Restricted Band Edge at 2390 MHz	15.209	42.4dBµV/m @ 2387.1MHz (-11.6dB)
		#11 2462MHz	Ethertronic s	-	Restricted Band Edge at 2483.5 MHz	15.209	39.5dBµV/m @ 2483.5MHz (-14.5dB)
Run # 2	802.11g Chain A	#1 2412MHz	Ethertronic s	-	Restricted Band Edge at 2390 MHz	15.209	44.0dBµV/m @ 2389.8MHz (-10.0dB)
		#11 2462MHz	Ethertronic s	-	Restricted Band Edge at 2483.5 MHz	15.209	41.2dBµV/m @ 2483.6MHz (-12.8dB)
Run # 3	802.11n20 Chain A	#1 2412MHz	Ethertronic s	-	Restricted Band Edge at 2390 MHz	15.209	39.7dBµV/m @ 2390.0MHz (-14.3dB)
		#11 2462MHz	Ethertronic s	-	Restricted Band Edge at 2483.5 MHz	15.209	39.2dBµV/m @ 2483.5MHz (-14.8dB)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1, Band Edge Field Strength - 802.11b, Chain A

Date of Test: 8/19/2011

Test Location: FT Chamber #5

Test Engineer: Rafael Varelas


Config Change: None

Run #1a, EUT on Channel #1 2412MHz - 802.11b, Chain A

2390 MHz Band Edge Signal Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2387.070	42.4	V	54.0	-11.6	AVG	299	1.0	RB 1 MHz;VB 10 Hz;Pk
2386.810	51.4	V	74.0	-22.6	PK	299	1.0	RB 1 MHz;VB 3 MHz;Pk
2387.150	41.7	H	54.0	-12.3	AVG	339	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.780	50.8	H	74.0	-23.2	PK	339	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Black = avg, blue = pk, vertical

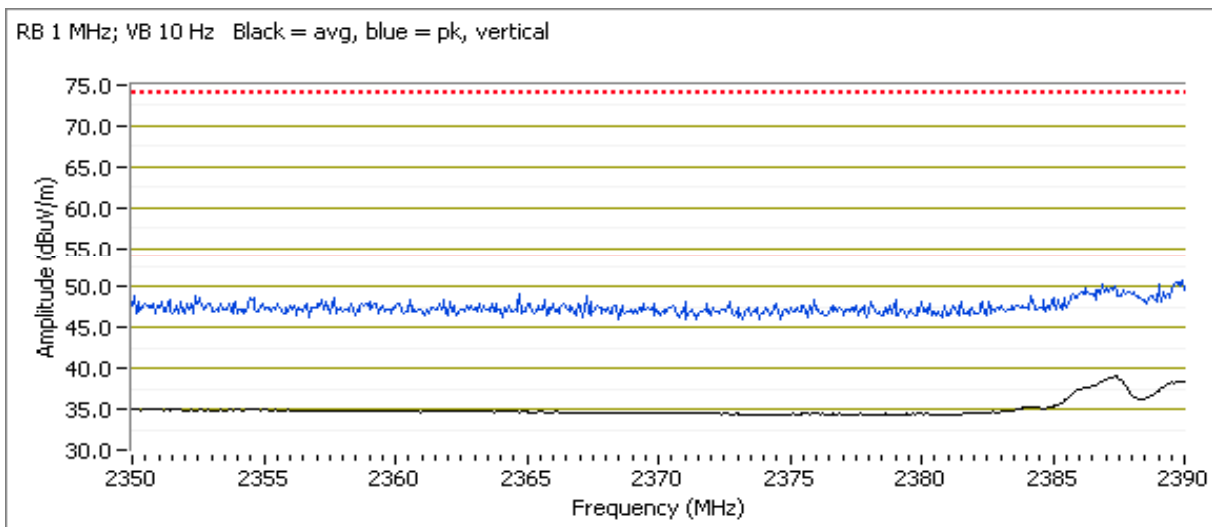


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1b, EUT on Channel #11 2462MHz - 802.11b, Chain A

2483.5 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2483.500	39.5	V	54.0	-14.5	AVG	3	1.2	RB 1 MHz;VB 10 Hz;Pk
2492.050	51.7	V	74.0	-22.3	PK	3	1.2	RB 1 MHz;VB 3 MHz;Pk
2483.510	38.2	H	54.0	-15.8	AVG	0	1.0	RB 1 MHz;VB 10 Hz;Pk
2483.600	49.6	H	74.0	-24.4	PK	0	1.0	RB 1 MHz;VB 3 MHz;Pk

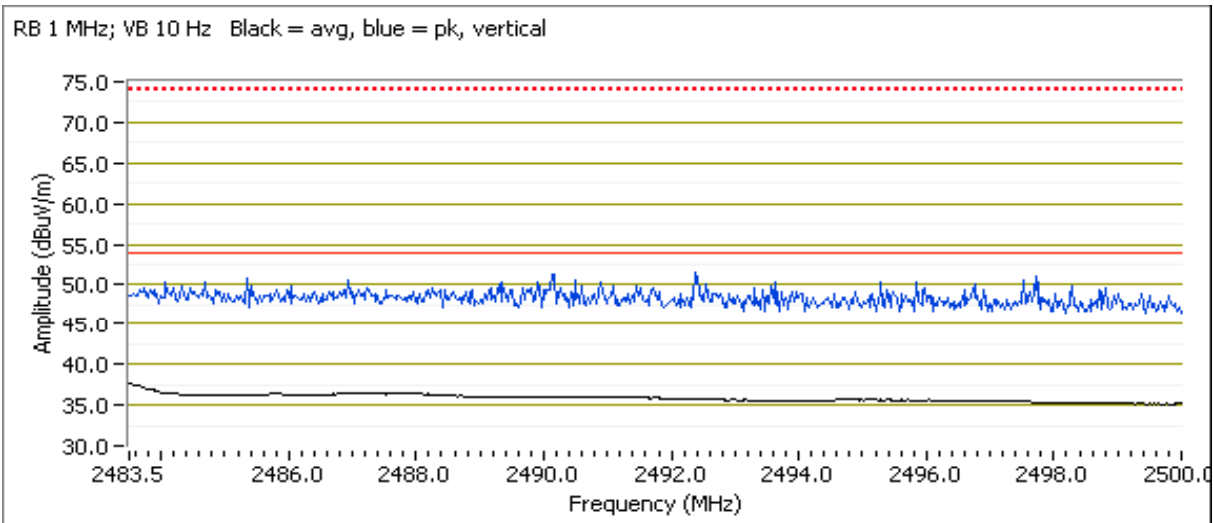

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 2, Band Edge Field Strength - 802.11g, Chain A

Date of Test: 8/19/2011

Test Location: FT Chamber #5

Test Engineer: Rafael Varelas


Config Change: None

Run # 2a, EUT on Channel #1 2412MHz - 802.11g, Chain A

2390 MHz Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2389.820	44.0	V	54.0	-10.0	AVG	0	1.0	RB 1 MHz;VB 10 Hz;Pk
2388.720	58.4	V	74.0	-15.6	PK	0	1.0	RB 1 MHz;VB 3 MHz;Pk
2389.940	40.8	H	54.0	-13.2	AVG	354	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.570	55.1	H	74.0	-18.9	PK	354	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Black = avg, blue = pk, vertical

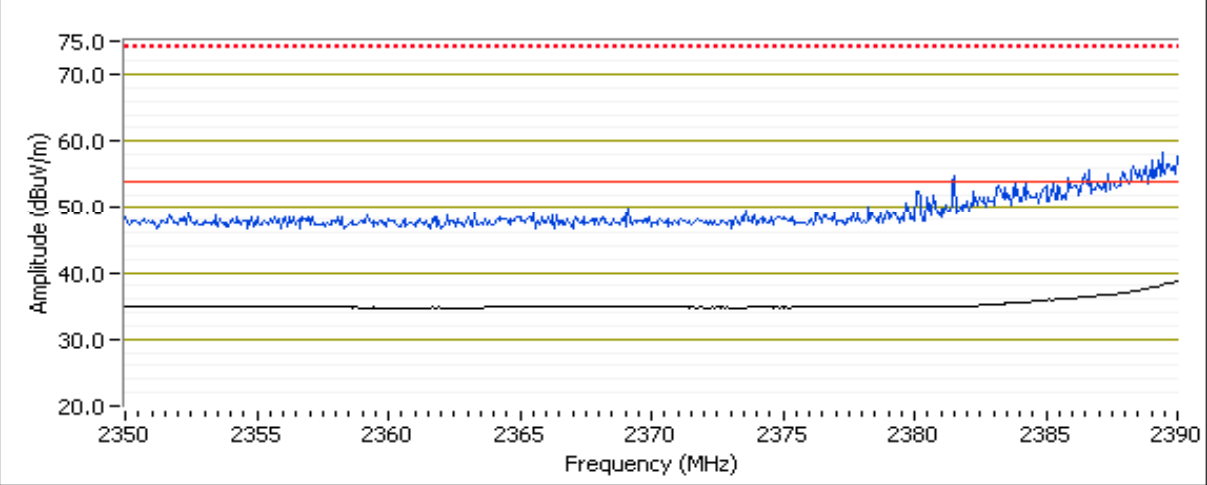


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 2b, EUT on Channel #11 2462MHz - 802.11g, Chain A

2483.5 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2483.550	41.2	V	54.0	-12.8	AVG	360	1.1	RB 1 MHz;VB 10 Hz;Pk
2483.880	58.0	V	74.0	-16.0	PK	360	1.1	RB 1 MHz;VB 3 MHz;Pk
2483.500	39.4	H	54.0	-14.6	AVG	360	1.0	RB 1 MHz;VB 10 Hz;Pk
2483.860	54.2	H	74.0	-19.8	PK	360	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Black = Avg, Blue = PK, Vertical

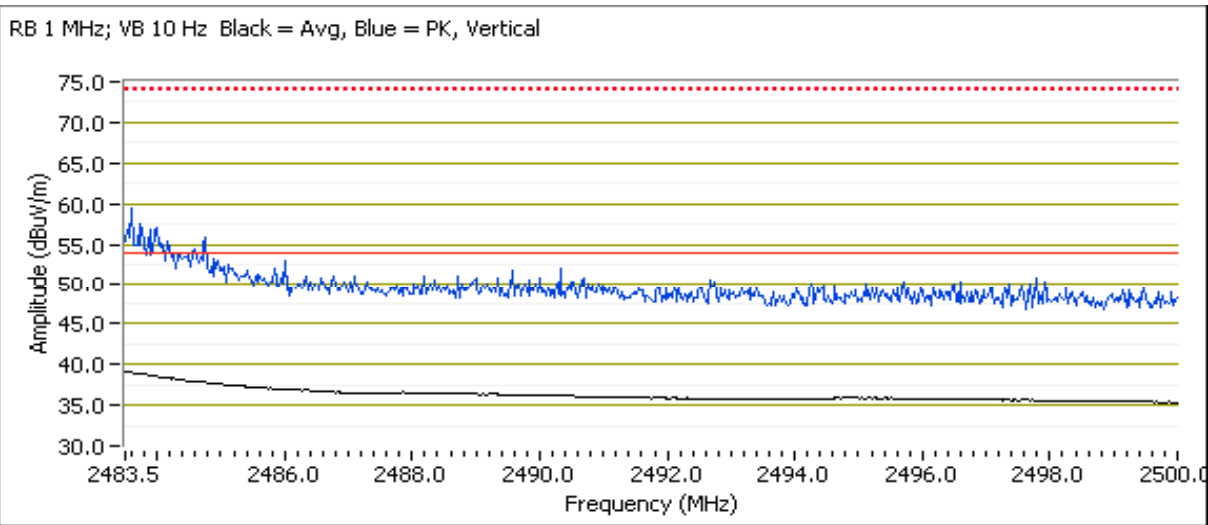

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3, Band Edge Field Strength - 802.11n20, Chain A

Date of Test: 8/19/2011

Test Location: FT Chamber #5

Test Engineer: Rafael Varelas


Config Change: None

Run # 3a, EUT on Channel #1 2412MHz - 802.11n20, Chain A

2390 MHz Band Edge Signal Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2389.980	39.7	V	54.0	-14.3	AVG	1	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.860	53.0	V	74.0	-21.0	PK	1	1.0	RB 1 MHz;VB 3 MHz;Pk
2389.990	38.7	H	54.0	-15.3	AVG	0	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.510	53.6	H	74.0	-20.4	PK	0	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Black = Avg, Blue = PK, Vertical

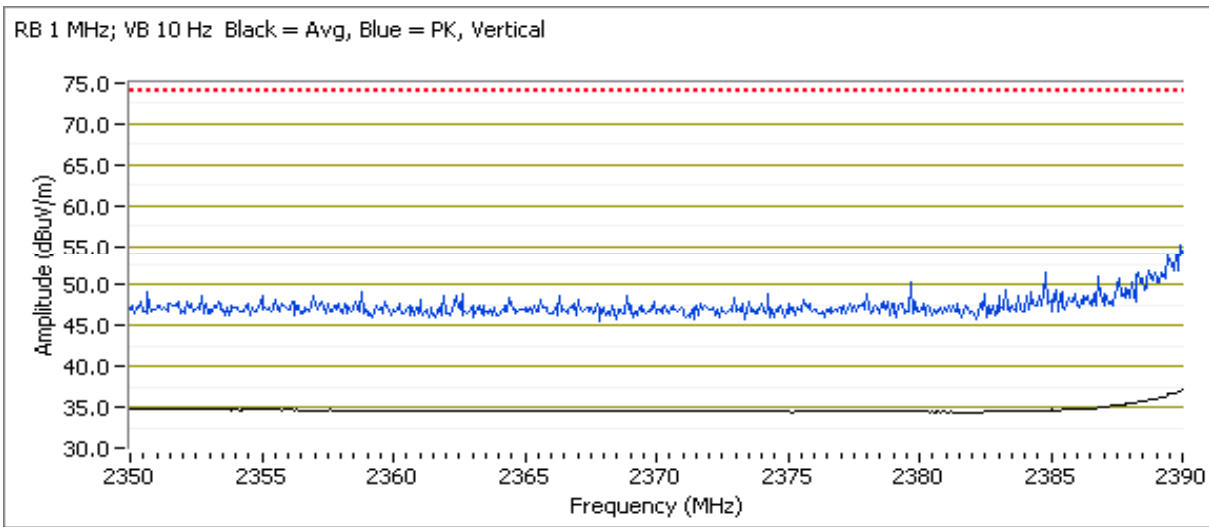


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3b, EUT on Channel #11 2462MHz - 802.11n20, Chain A

2483.5 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2483.500	39.2	V	54.0	-14.8	AVG	0	1.1	RB 1 MHz;VB 10 Hz;Pk
2483.580	52.1	V	74.0	-21.9	PK	0	1.1	RB 1 MHz;VB 3 MHz;Pk
2483.590	38.3	H	54.0	-15.7	AVG	0	1.2	RB 1 MHz;VB 10 Hz;Pk
2485.160	50.2	H	74.0	-23.8	PK	0	1.2	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Black = Avg, Blue = PK, Vertical

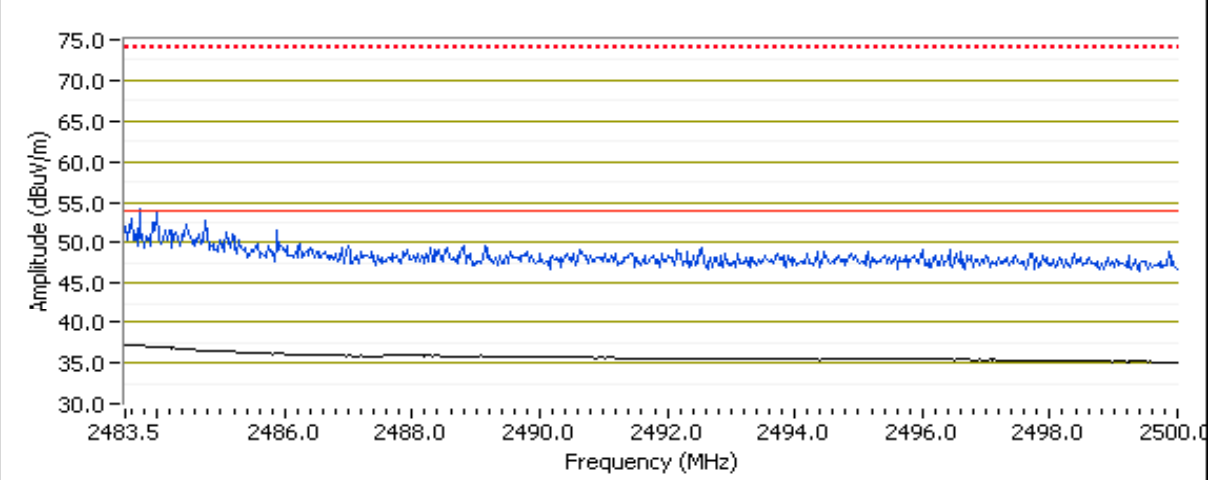

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

New Module #2011-1296, Laptop #2011-2312, Linux Shell

Run #	Mode	Channel	Antenna	Power Setting	Test Performed	Limit	Result / Margin
Run #1	802.11b Chain A	#1 2412MHz	Ethertronic s	-	Radiated Emissions, 1 - 26 GHz	FCC 15.209 / 15.247	53.2dBµV/m @ 4823.9MHz (-0.8dB)
		#6 2437MHz	Ethertronic s	-			53.5dBµV/m @ 4873.9MHz (-0.5dB)
		#11 2462MHz	Ethertronic s	-			46.3dBµV/m @ 2994.7MHz (-7.7dB)

Scans on center channel in all three OFDM modes to determine the worst case

Run # 2	802.11g Chain A	#6 2437MHz	Ethertronic s	-	Radiated Emissions, 1 - 26 GHz	FCC 15.209 / 15.247	48.3dBµV/m @ 2994.5MHz (-5.7dB)
	802.11n20 Chain A	#6 2437MHz	Ethertronic s	-			47.6dBµV/m @ 2994.5MHz (-6.4dB)

Top and bottom channels in worst case OFDM mode:

Run # 3	802.11g Chain A	#1 2412MHz	Ethertronic s	-	Radiated Emissions, 1 - 26 GHz	FCC 15.209 / 15.247	47.8dBµV/m @ 2994.5MHz (-6.2dB)
		#11 2462MHz	Ethertronic s	-			47.5dBµV/m @ 2994.5MHz (-6.5dB)

Receiver Spurious Emissions

Run # 4	Receive	#6, Chain A	Ethertronic s	-	Radiated Emissions, 1 - 7.5 GHz	RSS 210	45.2dBµV/m @ 1585.4MHz (-8.8dB)
---------	---------	-------------	------------------	---	------------------------------------	---------	------------------------------------

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:
 Temperature: 20-25 °C
 Rel. Humidity: 40-50 %

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Notes:

Preliminary testing showed no emissions below 1 GHz related to the radio

Antenna: Ethertronics

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1, Radiated Spurious Emissions, 1-26GHz, 802.11b, Chain A

Date of Test: 8/22/2011

Test Location: FT Chamber #7

Test Engineer: Rafael Varelas

Config Change: None


Run #1a, EUT on Channel #1 2412MHz - 802.11b, Chain A

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4823.920	53.2	V	54.0	-0.8	AVG	186	1.0	RB 1 MHz;VB 10 Hz;Pk
2994.590	48.9	V	54.0	-5.1	Peak	180	1.0	Note 3 - peak vs average limit
1188.890	40.1	H	54.0	-13.9	AVG	90	1.0	RB 1 MHz;VB 10 Hz;Pk
4823.950	55.3	V	74.0	-18.7	PK	186	1.0	RB 1 MHz;VB 3 MHz;Pk
1195.450	46.3	H	74.0	-27.7	PK	90	1.0	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Signal is not in restricted band, but the lower restricted band limit was used.

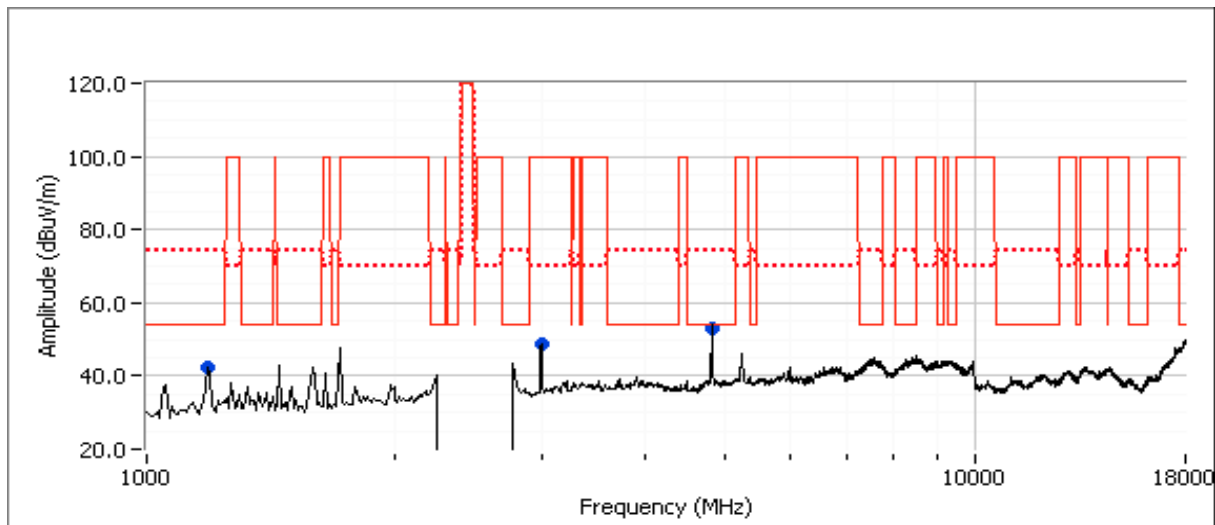

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1b: , EUT on Channel #6 2437MHz - 802.11b, Chain A

Date of Test: 11/2/2011

Test Location: FT5


Test Engineer: Joseph Cadigal

Config Change: none

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4873.940	53.5	V	54.0	-0.5	AVG	37	1.3	RB 1 MHz;VB 10 Hz;Pk
2994.720	45.6	V	54.0	-8.4	AVG	160	1.0	RB 1 MHz;VB 10 Hz;Pk, note 3
1597.740	58.1	V	74.0	-15.9	PK	160	1.3	RB 1 MHz;VB 3 MHz;Pk
4873.900	56.1	V	74.0	-17.9	PK	37	1.3	RB 1 MHz;VB 3 MHz;Pk
1598.110	33.5	V	54.0	-20.5	AVG	160	1.3	RB 1 MHz;VB 10 Hz;Pk
5221.840	33.4	V	54.0	-20.6	AVG	229	1.0	RB 1 MHz;VB 10 Hz;Pk, note 3
2994.680	50.1	V	74.0	-23.9	PK	160	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
5221.780	45.1	V	74.0	-28.9	PK	229	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
- Note 2: Scans made between 18 - 26GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range
- Note 3: Signal is not in restricted band, but the lower restricted band limit was used.

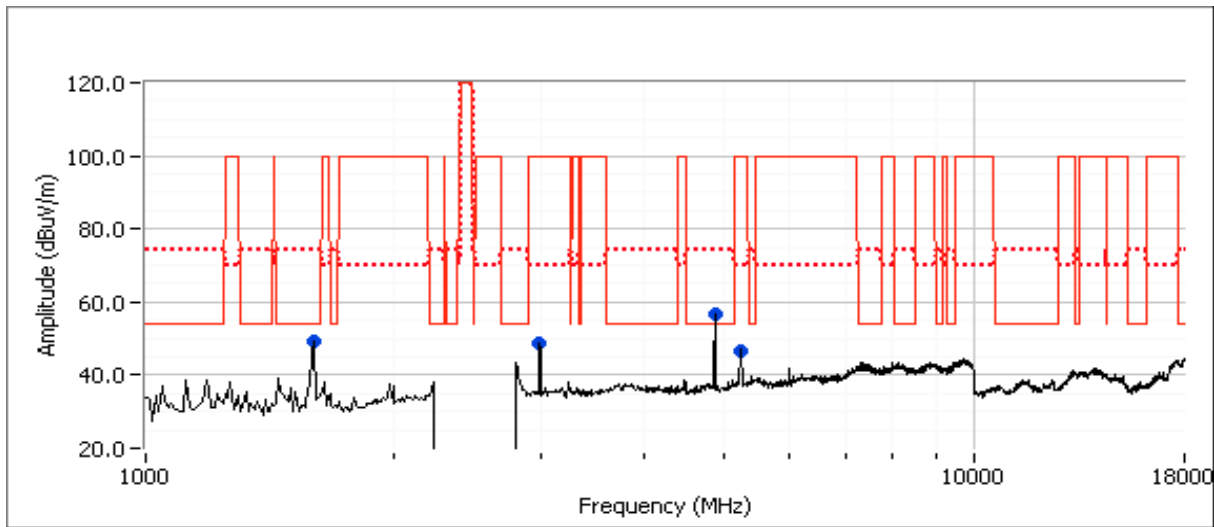

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1c: , EUT on Channel #11 2462MHz - 802.11b, Chain A


Date of Test: 11/2/2011
Test Engineer: Joseph Cadigal

Test Location: FT5
Config Change: none

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2994.740	46.3	V	54.0	-7.7	AVG	159	1.0	RB 1 MHz;VB 10 Hz;Pk, note 3
4920.940	44.7	V	54.0	-9.3	AVG	51	1.3	RB 1 MHz;VB 10 Hz;Pk
1594.450	59.8	V	74.0	-14.2	PK	168	1.0	RB 1 MHz;VB 3 MHz;Pk
1594.340	34.6	V	54.0	-19.4	AVG	168	1.0	RB 1 MHz;VB 10 Hz;Pk
5221.750	33.8	V	54.0	-20.2	AVG	159	1.0	RB 1 MHz;VB 10 Hz;Pk, note 3
2994.530	51.2	V	74.0	-22.8	PK	159	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
4920.990	49.8	V	74.0	-24.2	PK	51	1.3	RB 1 MHz;VB 3 MHz;Pk
5219.360	45.3	V	74.0	-28.7	PK	159	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3

Note 3: Signal is not in restricted band, but the lower restricted band limit was used.

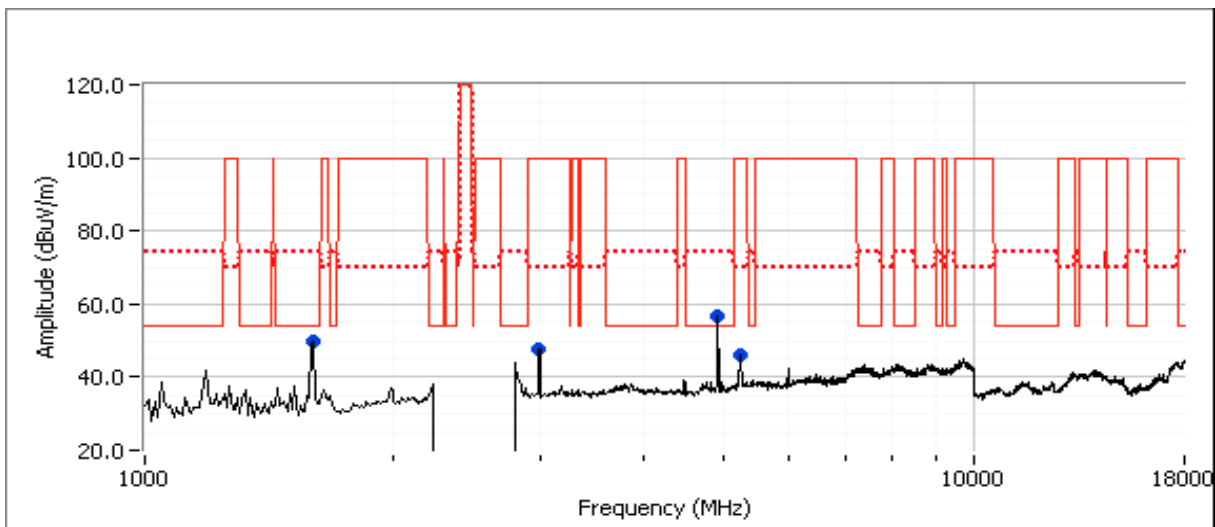

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 2, Radiated Spurious Emissions, 1-26GHz, 802.11g, 802.11n20, Chain A

Date of Test: 8/22/2011

Test Location: FT Chamber #7

Test Engineer: Rafael Varelas

Config Change: None


Run # 2a, EUT on Channel #6 2437MHz - 802.11g, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2994.510	48.3	V	54.0	-5.7	Peak	192	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
1189.110	40.7	H	54.0	-13.3	AVG	328	1.0	RB 1 MHz;VB 10 Hz;Pk
4875.750	38.2	V	54.0	-15.8	AVG	181	1.0	RB 1 MHz;VB 10 Hz;Pk
4874.920	50.0	V	74.0	-24.0	PK	181	1.0	RB 1 MHz;VB 3 MHz;Pk
1448.470	29.2	H	54.0	-24.8	AVG	248	1.0	RB 1 MHz;VB 10 Hz;Pk
1197.080	49.0	H	74.0	-25.0	PK	328	1.0	RB 1 MHz;VB 3 MHz;Pk
1446.630	37.3	H	74.0	-36.7	PK	248	1.0	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Signal is not in restricted band, but the lower restricted band limit was used.

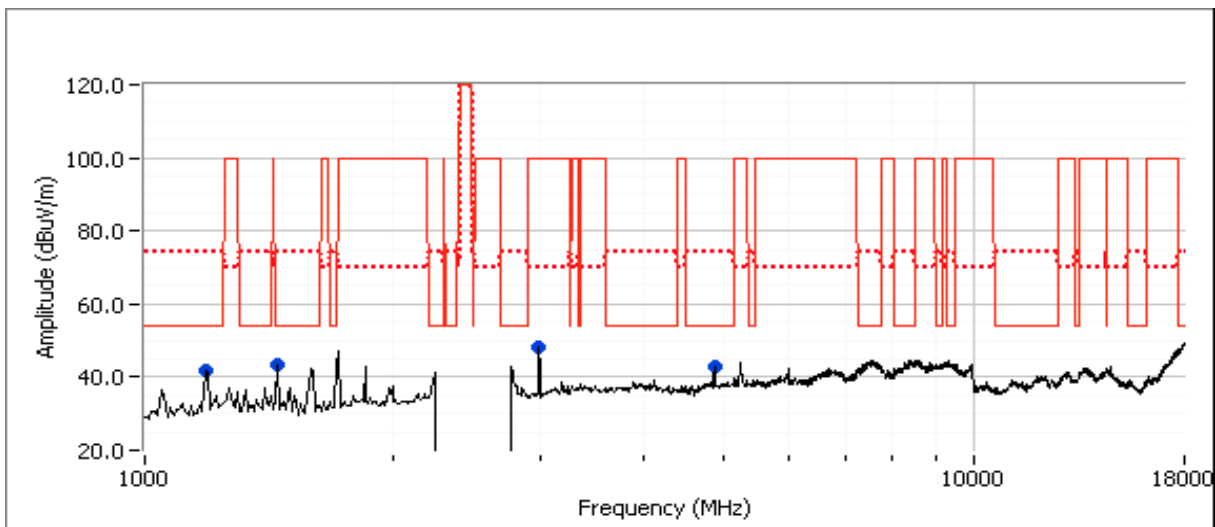


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 2b: , EUT on Channel #6 2437MHz - 802.11n20, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2994.510	47.6	V	54.0	-6.4	Peak	152	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
1188.910	40.2	V	54.0	-13.8	AVG	288	1.0	RB 1 MHz;VB 10 Hz;Pk
1594.720	55.2	V	74.0	-18.8	PK	196	1.0	RB 1 MHz;VB 3 MHz;Pk
1597.150	32.3	V	54.0	-21.7	AVG	196	1.0	RB 1 MHz;VB 10 Hz;Pk
1189.740	37.0	V	74.0	-37.0	PK	288	1.0	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
- Note 2: Scans made between 18 - 26GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range
- Note 3: Signal is not in restricted band, but the lower restricted band limit was used.

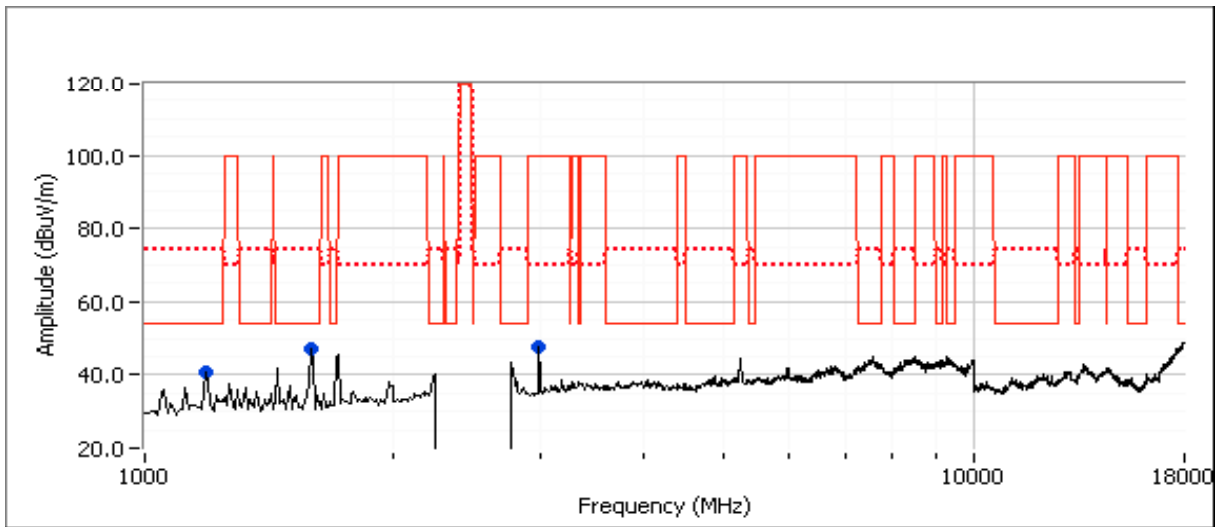

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3, Radiated Spurious Emissions, 1-26GHz, 802.11g, Chain A

Date of Test: 8/22/2011

Test Location: FT Chamber #7

Test Engineer: Rafael Varelas

Config Change: None


Run # 3a, EUT on Channel #1 2412MHz - 802.11g, Chain A

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2994.510	47.8	V	54.0	-6.2	Peak	144	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
1189.220	38.7	V	54.0	-15.3	AVG	123	1.0	RB 1 MHz;VB 10 Hz;Pk
4825.200	35.8	V	54.0	-18.2	AVG	26	1.0	RB 1 MHz;VB 10 Hz;Pk
1593.410	53.0	V	74.0	-21.0	PK	147	1.0	RB 1 MHz;VB 3 MHz;Pk
1593.780	31.5	V	54.0	-22.5	AVG	147	1.0	RB 1 MHz;VB 10 Hz;Pk
4825.700	48.5	V	74.0	-25.5	PK	26	1.0	RB 1 MHz;VB 3 MHz;Pk
1188.940	44.2	V	74.0	-29.8	PK	123	1.0	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Signal is not in restricted band, but the lower restricted band limit was used.

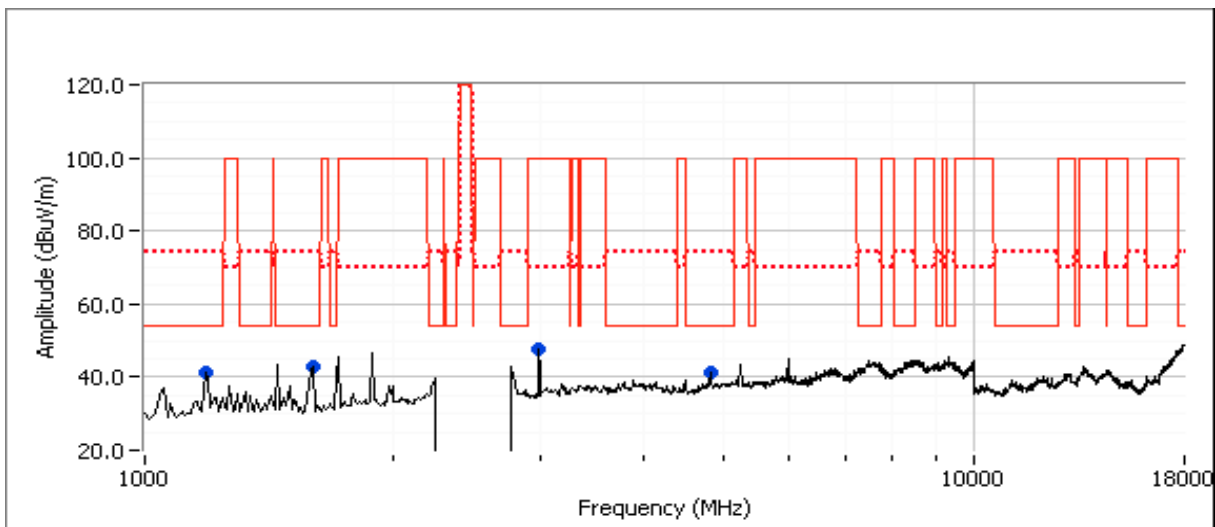

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A


Run # 3c : , EUT on Channel #11 2462MHz - 802.11g, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2994.510	47.5	V	54.0	-6.5	Peak	190	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
1453.210	46.0	H	54.0	-8.0	AVG	106	1.0	RB 1 MHz;VB 10 Hz;Pk
4925.000	38.9	V	54.0	-15.1	AVG	18	1.3	RB 1 MHz;VB 10 Hz;Pk
1188.740	36.6	H	54.0	-17.4	AVG	112	1.0	RB 1 MHz;VB 10 Hz;Pk
4924.300	50.3	V	74.0	-23.7	PK	18	1.3	RB 1 MHz;VB 3 MHz;Pk
1452.410	48.5	H	74.0	-25.5	PK	106	1.0	RB 1 MHz;VB 3 MHz;Pk
1189.840	36.1	H	74.0	-37.9	PK	112	1.0	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Signal is not in restricted band, but the lower restricted band limit was used.

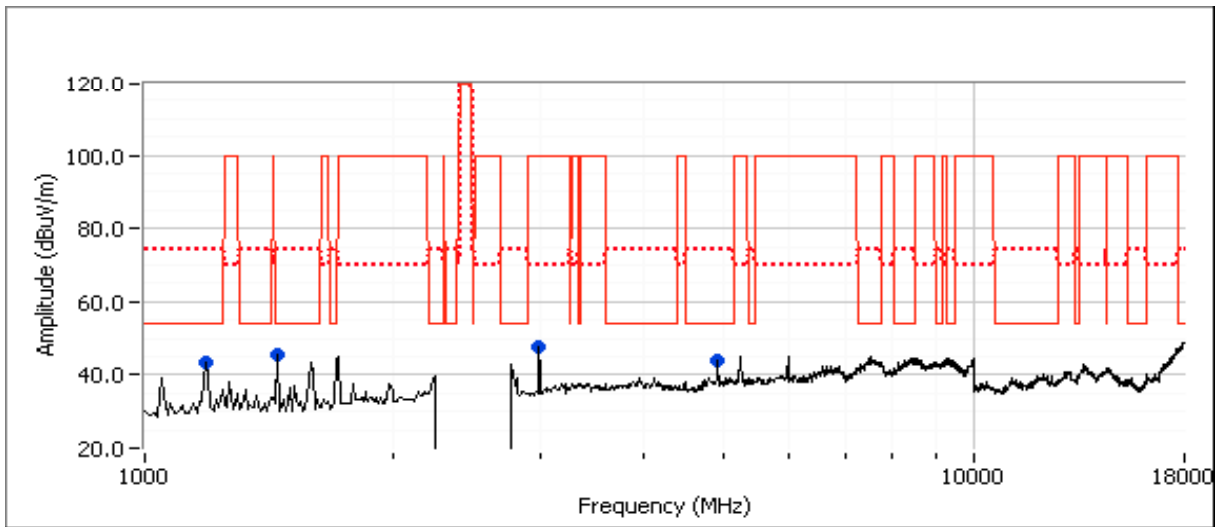

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 4, Radiated Spurious Emissions, 1-7.5GHz, Receive, Chain A

Date of Test: 8/22/2011


Test Location: FT Chamber #7

Test Engineer: Rafael Varelas

Config Change: None

Run # 4a, EUT on Channel #6 2437MHz - Receive, Chain A

Frequency MHz	Level dB μ V/m	Pol v/h	RSS 210		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1585.380	45.2	H	54.0	-8.8	AVG	248	1.0	RB 1 MHz;VB 10 Hz;Pk
1586.210	44.1	H	74.0	-29.9	PK	248	1.0	RB 1 MHz;VB 3 MHz;Pk
2994.680	46.7	V	54.0	-7.3	AVG	143	1.0	RB 1 MHz;VB 10 Hz;Pk
2994.650	50.3	V	74.0	-23.7	PK	143	1.0	RB 1 MHz;VB 3 MHz;Pk
1849.490	29.5	V	54.0	-24.5	AVG	127	1.0	RB 1 MHz;VB 10 Hz;Pk
1849.190	38.9	V	74.0	-35.1	PK	127	1.0	RB 1 MHz;VB 3 MHz;Pk
1717.530	42.7	V	54.0	-11.3	AVG	150	1.0	RB 1 MHz;VB 10 Hz;Pk
1717.870	38.2	V	74.0	-35.8	PK	150	1.0	RB 1 MHz;VB 3 MHz;Pk

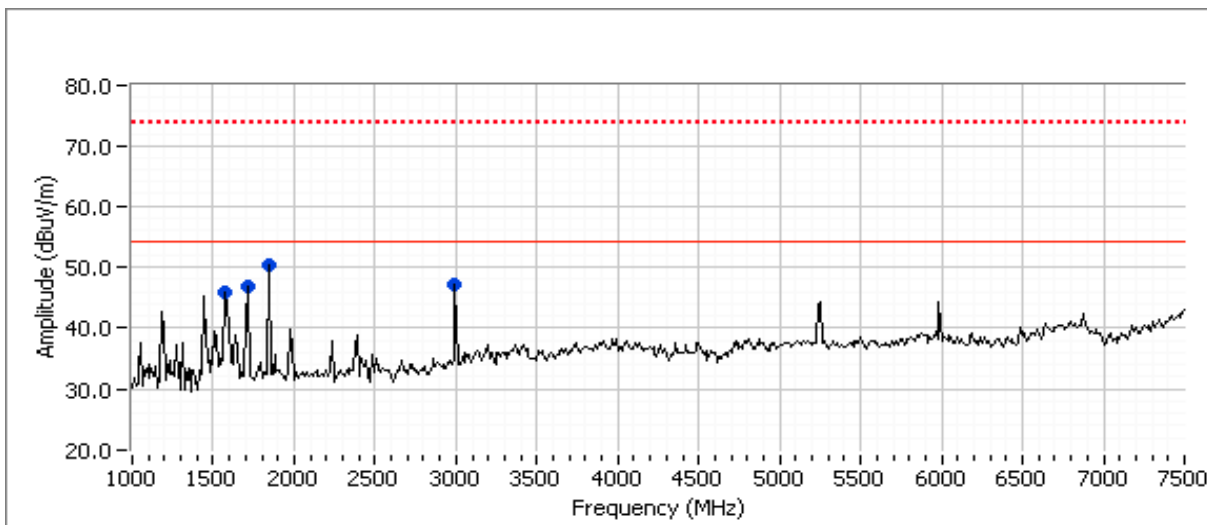

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

SCU:

Run #	Mode	Channel	Antenna	Power Setting	Test Performed	Limit	Result / Margin
Run #1	802.11b Chain A	#1 2412MHz	Cisco	-	Restricted Band Edge at 2390 MHz	15.209	42.3dB μ V/m @ 2390.0MHz (-11.7dB)
		#11 2462MHz	Cisco	-	Restricted Band Edge at 2483.5 MHz	15.209	49.4dB μ V/m @ 2483.5MHz (-4.6dB)
Run # 2	802.11g Chain A	#1 2412MHz	Cisco	-	Restricted Band Edge at 2390 MHz	15.209	53.6dB μ V/m @ 2390.0MHz (-0.4dB)
		#11 2462MHz	Cisco	-	Restricted Band Edge at 2483.5 MHz	15.209	72.5dB μ V/m @ 2483.7MHz (-1.5dB)
Run # 3	802.11n20 Chain A	#1 2412MHz	Cisco	-	Restricted Band Edge at 2390 MHz	15.209	45.9dB μ V/m @ 2389.9MHz (-8.1dB)
		#11 2462MHz	Cisco	-	Restricted Band Edge at 2483.5 MHz	15.209	50.1dB μ V/m @ 2483.5MHz (-3.9dB)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1, Band Edge Field Strength - 802.11b, Chain A


Run #1a, EUT on Channel #1 2412MHz - 802.11b, Chain A

Date of Test: 11/7/2011
 Test Engineer: Joseph Cadigal


Test Location: FT Chamber #4
 Config Change: None

2390 MHz Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	42.3	V	54.0	-11.7	AVG	231	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.730	52.2	V	74.0	-21.8	PK	231	1.0	RB 1 MHz;VB 3 MHz;Pk
2389.730	38.5	H	54.0	-15.5	AVG	117	1.0	RB 1 MHz;VB 10 Hz;Pk
2351.130	49.6	H	74.0	-24.4	PK	117	1.0	RB 1 MHz;VB 3 MHz;Pk

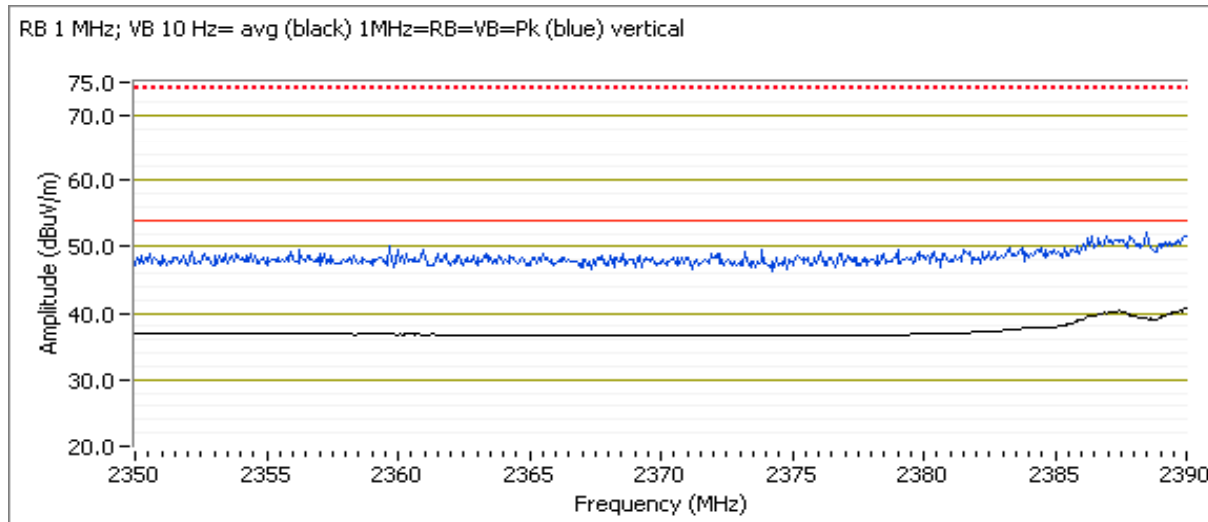

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

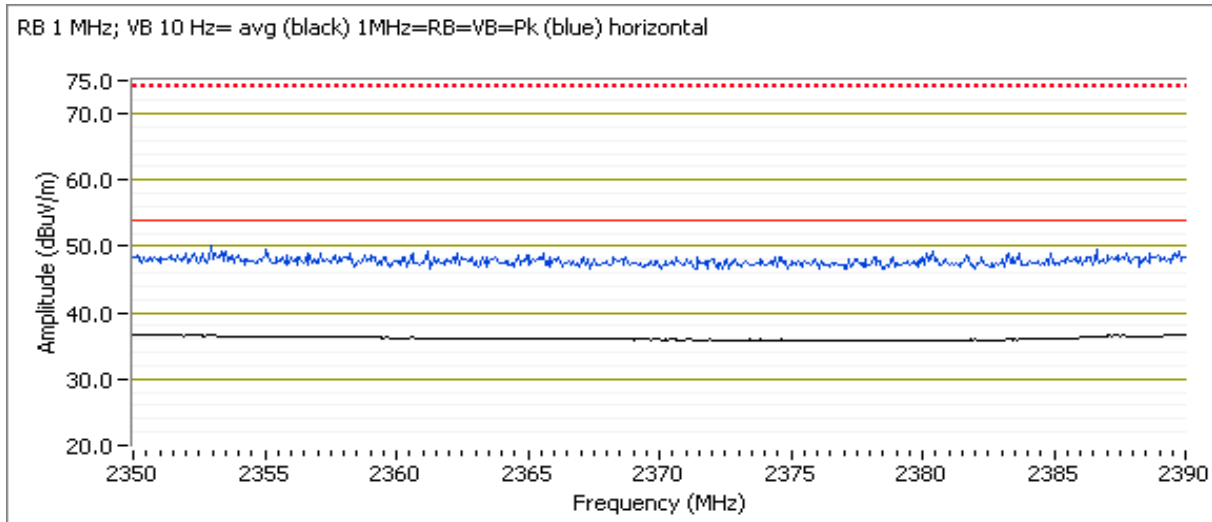

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1b, EUT on Channel #11 2462MHz - 802.11b, Chain A

Date of Test: 8/1/2011

Test Location: FT Chamber #4


Test Engineer: Rafael Varelas

Config Change: None

2483.5 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2483.510	49.4	V	54.0	-4.6	AVG	175	1.5	RB 1 MHz;VB 10 Hz;Pk
2488.730	60.1	V	74.0	-13.9	PK	175	1.5	RB 1 MHz;VB 3 MHz;Pk
2483.580	47.6	H	54.0	-6.4	AVG	160	0.9	RB 1 MHz;VB 10 Hz;Pk
2483.610	59.4	H	74.0	-14.6	PK	160	0.9	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace), Vertical

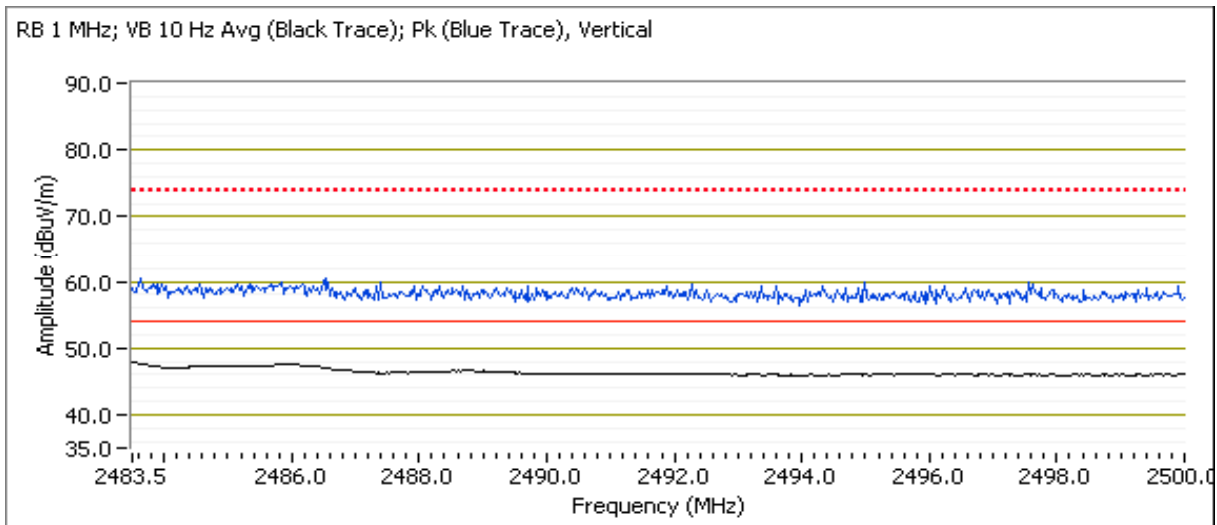

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 2, Band Edge Field Strength - 802.11g, Chain A

Date of Test: 8/1/2011

Test Location: FT Chamber #4


Test Engineer: Rafael Varelas

Config Change: None

Run # 2a, EUT on Channel #1 2412MHz - 802.11g, Chain A

2390 MHz Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	53.6	V	54.0	-0.4	AVG	259	1.3	RB 1 MHz;VB 10 Hz;Pk
2389.870	71.1	V	74.0	-2.9	PK	259	1.3	RB 1 MHz;VB 3 MHz;Pk
2389.970	48.0	H	54.0	-6.0	AVG	236	0.9	RB 1 MHz;VB 10 Hz;Pk
2389.400	60.6	H	74.0	-13.4	PK	236	0.9	RB 1 MHz;VB 3 MHz;Pk

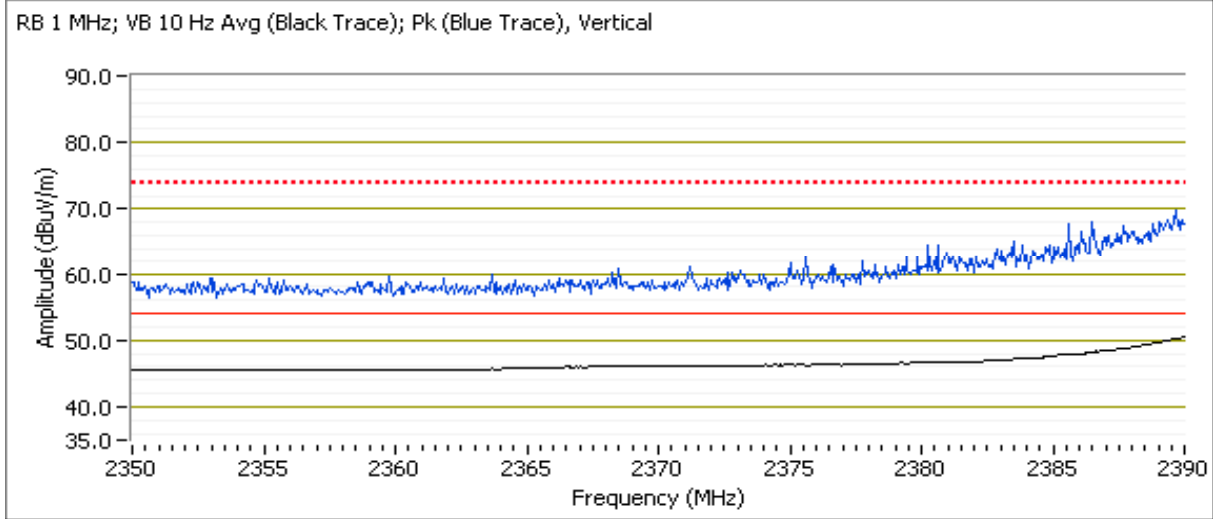


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 2b, EUT on Channel #11 2462MHz - 802.11g, Chain A

2483.5 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.500	51.0	V	54.0	-3.0	AVG	176	1.4	RB 1 MHz;VB 10 Hz;Pk
2483.650	72.5	V	74.0	-1.5	PK	176	1.4	RB 1 MHz;VB 3 MHz;Pk
2483.700	47.5	H	54.0	-6.5	AVG	261	0.9	RB 1 MHz;VB 10 Hz;Pk
2483.990	59.6	H	74.0	-14.4	PK	261	0.9	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace), Vertical

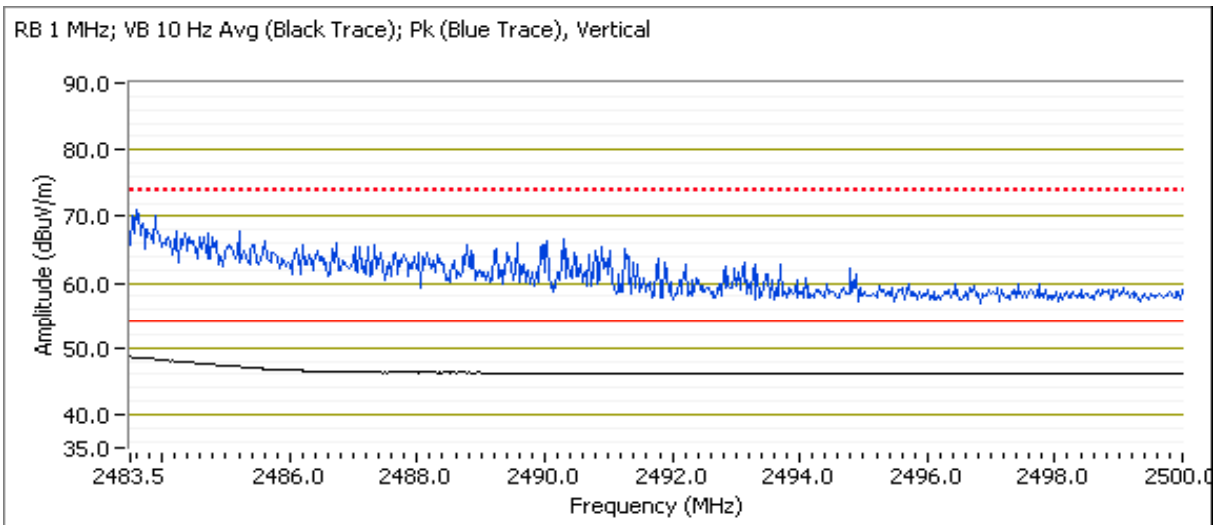

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3, Band Edge Field Strength - 802.11n20, Chain A

Date of Test: 11/7/2011

Test Location: FT Chamber #4


Test Engineer: Joseph Cadigal

Config Change: none


Run # 3a, EUT on Channel #1 2412MHz - 802.11n20, Chain A

2390 MHz Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2389.930	45.9	V	54.0	-8.1	AVG	225	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.870	59.5	V	74.0	-14.5	PK	225	1.0	RB 1 MHz;VB 3 MHz;Pk
2389.930	40.0	H	54.0	-14.0	AVG	115	1.0	RB 1 MHz;VB 10 Hz;Pk
2389.200	53.9	H	74.0	-20.1	PK	115	1.0	RB 1 MHz;VB 3 MHz;Pk

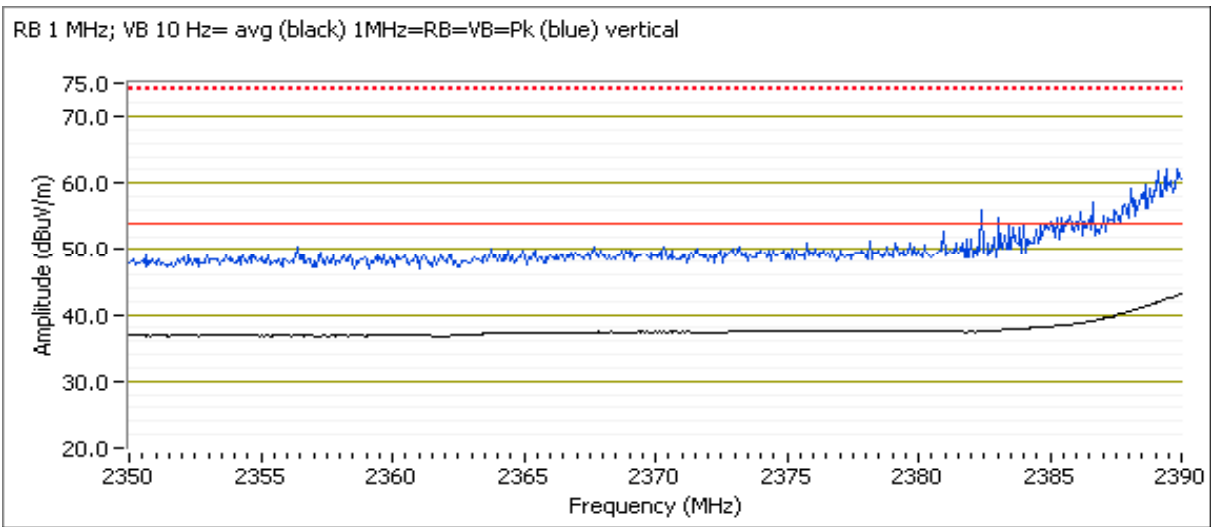

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

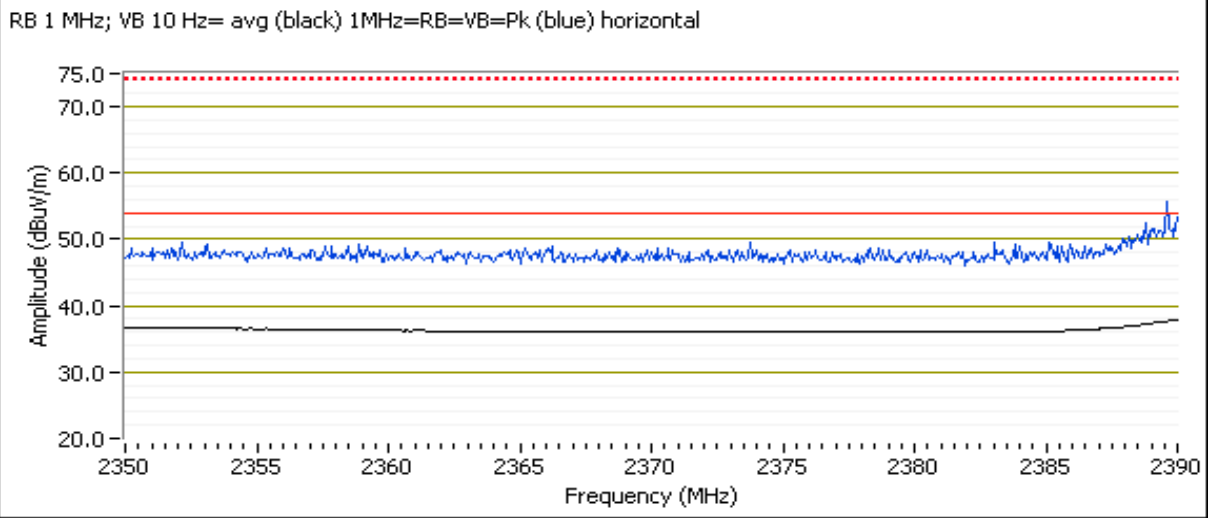

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3b, EUT on Channel #11 2462MHz - 802.11n20, Chain A

Date of Test: 11/7/2011


Test Location: FT Chamber #4

Test Engineer: Josphed Cadigal


Config Change: none

2483.5 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2483.500	50.1	V	54.0	-3.9	AVG	221	1.0	RB 1 MHz;VB 10 Hz;Pk
2484.320	65.5	V	74.0	-8.5	PK	221	1.0	RB 1 MHz;VB 3 MHz;Pk
2483.550	40.1	H	54.0	-13.9	AVG	115	1.0	RB 1 MHz;VB 10 Hz;Pk
2484.270	52.4	H	74.0	-21.6	PK	115	1.0	RB 1 MHz;VB 3 MHz;Pk

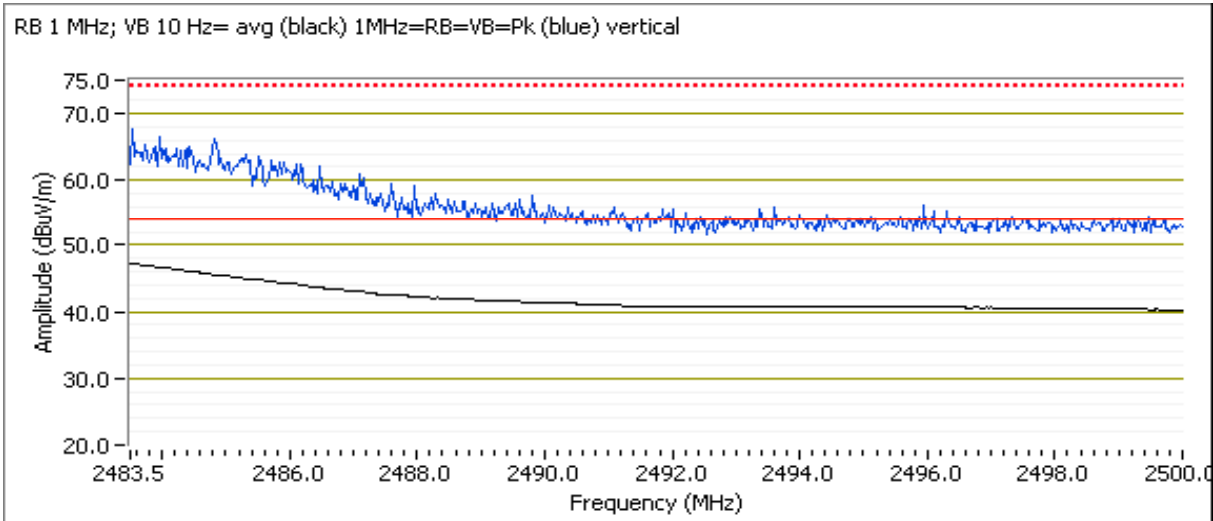

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

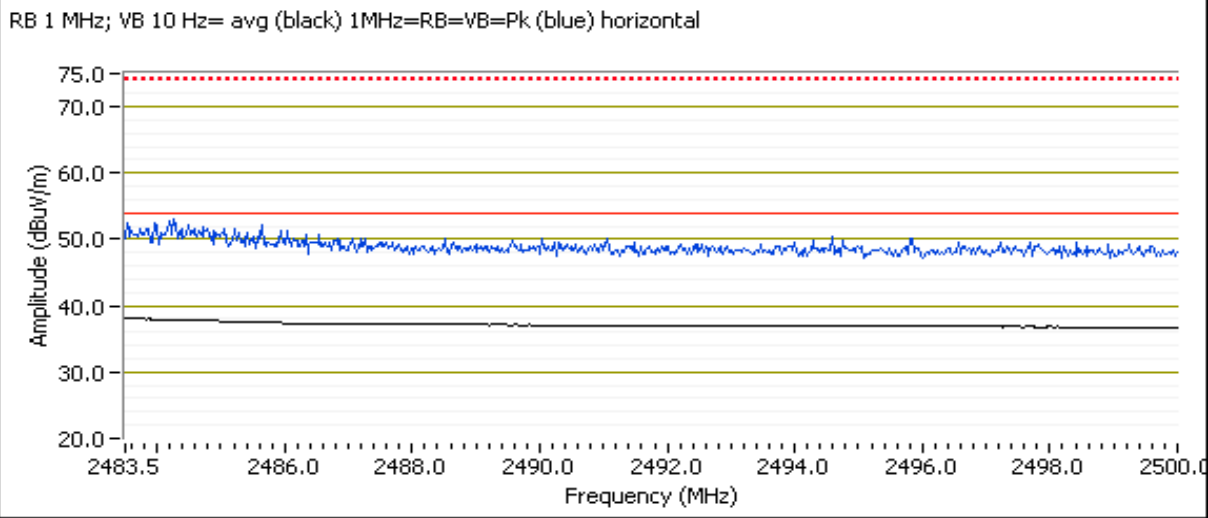

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Antenna	Power Setting	Test Performed	Limit	Result / Margin
Run #1	802.11b Chain A	#1 2412MHz	Cisco	-	Radiated Emissions 1 - 26 GHz	FCC 15.209 / 15.247	49.4dBµV/m @ 4824.0MHz (-4.6dB)
		#6 2437MHz	Cisco	-			40.5dBµV/m @ 4874.0MHz (-13.5dB)
		#11 2462MHz	Cisco	-			46.5dBµV/m @ 4924.0MHz (-7.5dB)

Scans on center channel in all two OFDM modes to determine the worst case

Run # 2	802.11g Chain A	#6 2437MHz	Cisco	-	Radiated Emissions 1 - 26 GHz	FCC 15.209 / 15.247	58.2dBµV/m @ 1597.2MHz (-15.8dB)
	802.11n20 Chain A	#6 2437MHz	Cisco	-			39.4dBµV/m @ 1196.8MHz (-14.6dB)

Top and bottom channels in worst case OFDM mode:

Run # 3	802.11n20 Chain A	#1 2412MHz	Cisco	-	Radiated Emissions 1 - 26 GHz	FCC 15.209 / 15.247	49.8dBµV/m @ 2994.7MHz (-20.2dB)
		#11 2462MHz	Cisco	-			40.7dBµV/m @ 1197.9MHz (-13.3dB)

Receiver Spurious Emissions

Run # 4	Receive	#6 Chain A	Cisco	-	Radiated Emissions 1 - 7.5 GHz	RSS 210	49.0dBµV/m @ 2994.7MHz (-5.0dB)
---------	---------	---------------	-------	---	-----------------------------------	---------	------------------------------------

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 20-25 °C
Rel. Humidity: 40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Notes:

Preliminary testing showed no emissions below 1 GHz related to the radio
 Antenna: Cisco

Run #1, Radiated Spurious Emissions, 1-26GHz, 802.11b, Chain A

Date of Test: 8/1/2011

Test Location: FT Chamber #4

Test Engineer: Rafael Varelas

Config Change: None


Run #1a, EUT on Channel #1 2412MHz - 802.11b, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
4824.020	49.4	V	54.0	-4.6	AVG	163	1.0	RB 1 MHz;VB 10 Hz;Pk
4823.830	54.1	V	74.0	-19.9	PK	163	1.0	RB 1 MHz;VB 3 MHz;Pk
1594.350	32.3	V	54.0	-21.7	AVG	112	1.0	RB 1 MHz;VB 10 Hz;Pk
1596.760	57.7	V	74.0	-16.3	PK	112	1.0	RB 1 MHz;VB 3 MHz;Pk
2994.570	52.4	V	-	-	PK	149	1.0	Note 3

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Emission in non-restricted band, refer to antenna port measurements.

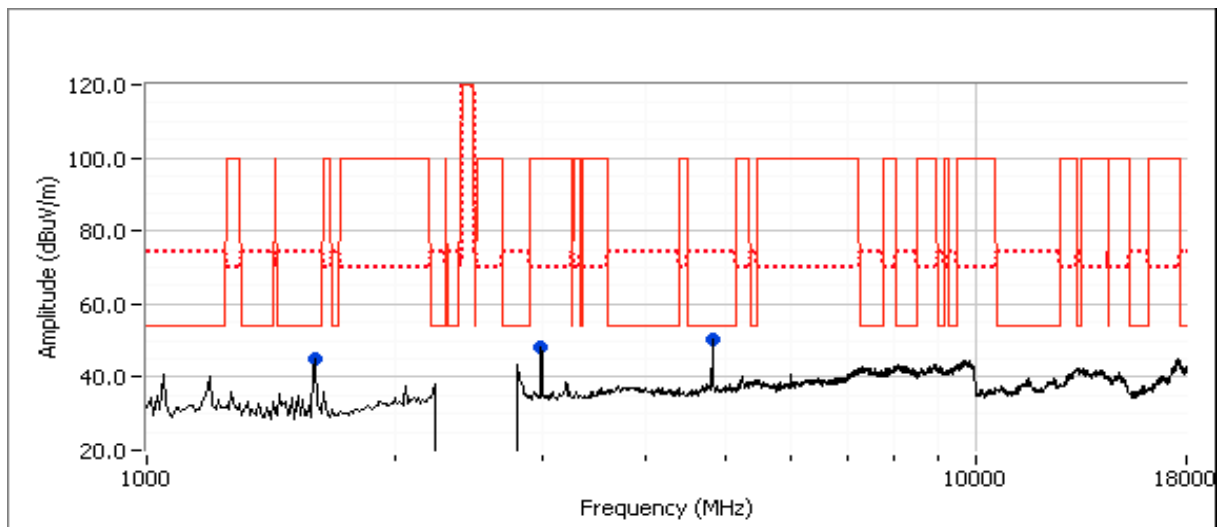

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A


Run #1b: , EUT on Channel #6 2437MHz - 802.11b, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4874.020	40.5	V	54.0	-13.5	AVG	302	1.6	RB 1 MHz;VB 10 Hz;Pk
4873.830	47.3	V	74.0	-26.7	PK	302	1.6	RB 1 MHz;VB 3 MHz;Pk
1596.920	32.1	V	54.0	-21.9	AVG	141	1.0	RB 1 MHz;VB 10 Hz;Pk
1595.000	56.1	V	74.0	-17.9	PK	141	1.0	RB 1 MHz;VB 3 MHz;Pk
2994.610	48.0	V	-	-	PK	149	1.0	Note 3

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Emission in non-restricted band, refer to antenna port measurements.

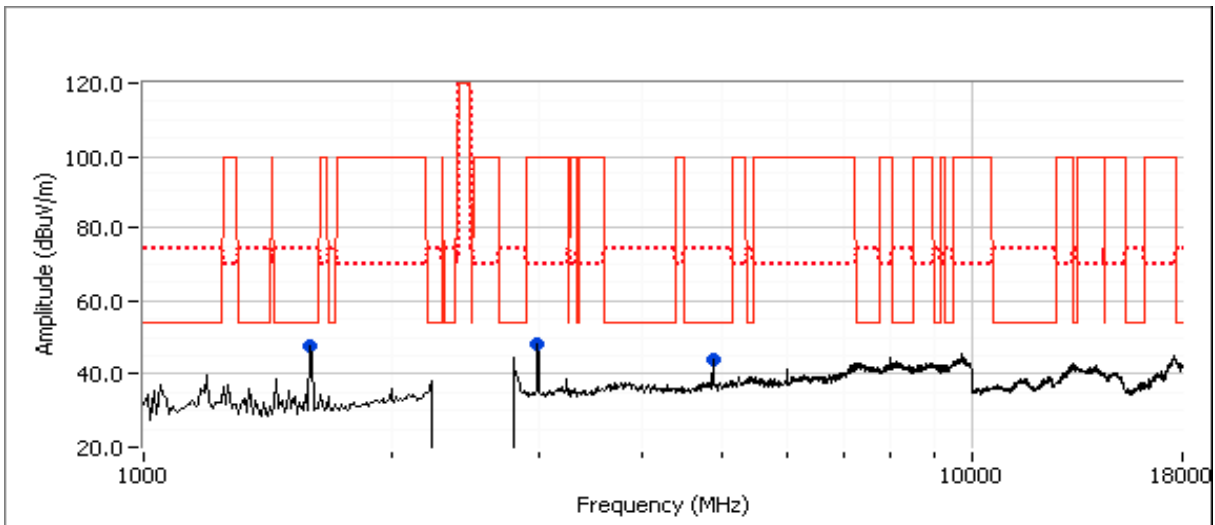

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A


Run #1c: , EUT on Channel #11 2462MHz - 802.11b, Chain A

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4924.040	46.5	V	54.0	-7.5	AVG	48	1.0	RB 1 MHz;VB 10 Hz;Pk
4924.120	50.5	V	74.0	-23.5	PK	48	1.0	RB 1 MHz;VB 3 MHz;Pk
1585.500	27.9	V	54.0	-26.1	AVG	105	1.0	RB 1 MHz;VB 10 Hz;Pk
1587.850	42.8	V	74.0	-31.2	PK	105	1.0	RB 1 MHz;VB 3 MHz;Pk
2994.400	48.2	V	-	-	PK	89	1.0	Note 3

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Emission in non-restricted band, refer to antenna port measurements.

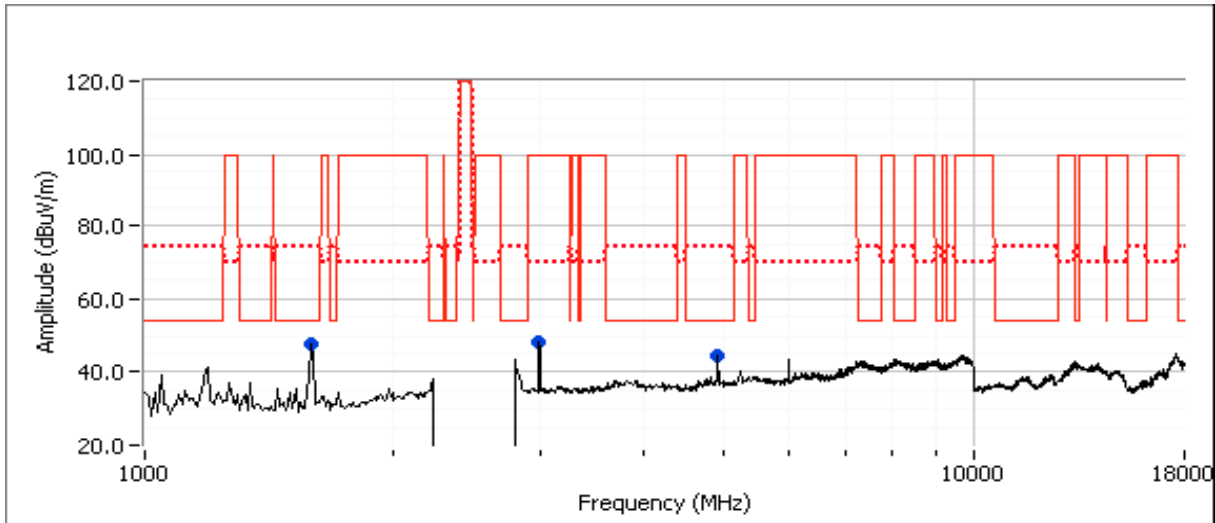


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 2b: , EUT on Channel #6 2437MHz - 802.11n20, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1196.840	39.4	V	54.0	-14.6	AVG	277	1.5	RB 1 MHz;VB 10 Hz;Pk
1596.490	55.8	V	74.0	-18.2	PK	196	1.0	RB 1 MHz;VB 3 MHz;Pk
2994.700	49.7	H	-	-	PK	266	1.0	Note 3
1597.290	33.0	V	54.0	-21.0	AVG	196	1.0	RB 1 MHz;VB 10 Hz;Pk
1197.740	51.7	V	74.0	-22.3	PK	277	1.5	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
- Note 2: Scans made between 18 - 26GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range
- Note 3: Emission in non-restricted band, refer to antenna port measurements.

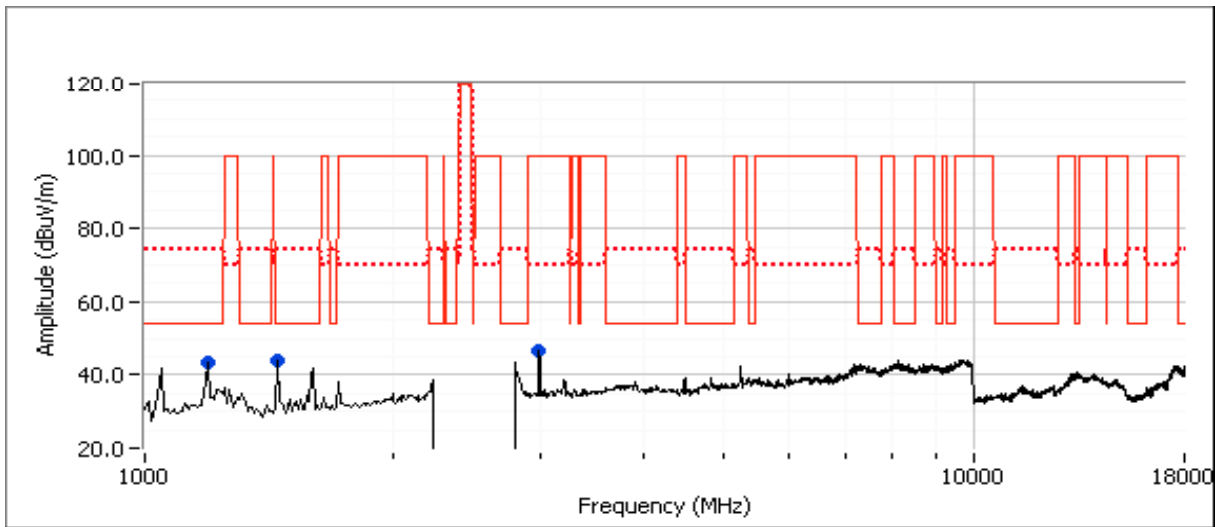

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3, Radiated Spurious Emissions, 1-26GHz, 802.11n 20MHz, Chain A

Date of Test: 8/2/2011

Test Location: FT Chamber #7

Test Engineer: M. Birgani

Config Change:


Run # 3a, EUT on Channel #1 2412MHz - 802.11n 20MHz, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1453.030	44.0	H	54.0	-10.0	AVG	15	1.0	RB 1 MHz;VB 10 Hz;Pk
1197.360	40.3	V	54.0	-13.7	AVG	156	1.0	RB 1 MHz;VB 10 Hz;Pk
1202.460	55.6	V	74.0	-18.4	PK	156	1.0	RB 1 MHz;VB 3 MHz;Pk
2994.730	49.8	H	-	-	PK	266	1.0	Note 3
1456.220	51.2	H	74.0	-22.8	PK	15	1.0	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Emission in non-restricted band, refer to antenna port measurements.

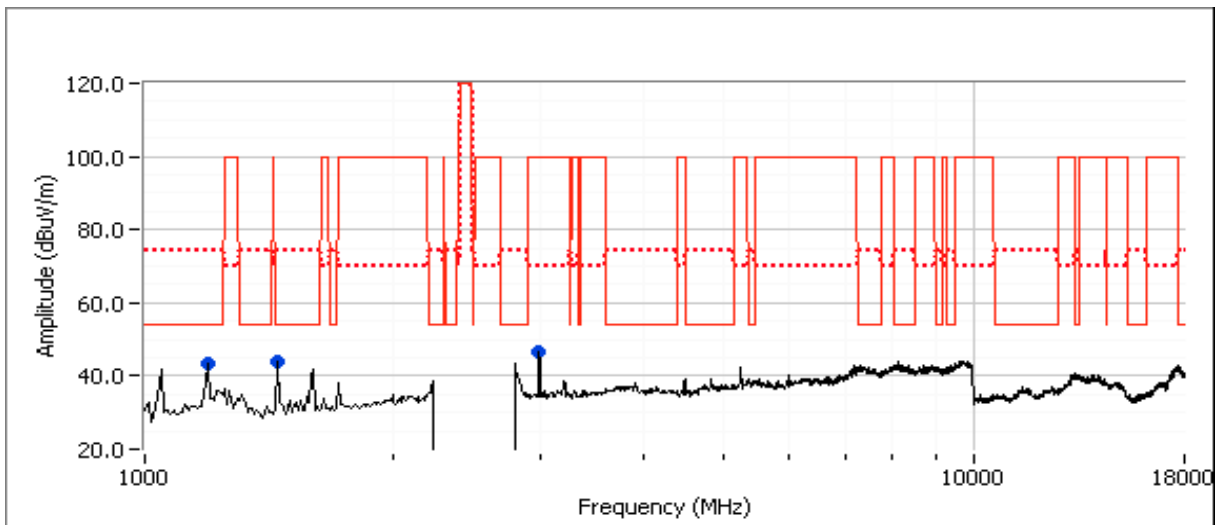

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A


Run # 3c : , EUT on Channel #11 2462MHz - 802.11n 20MHz, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1197.870	40.7	V	54.0	-13.3	AVG	283	1.0	RB 1 MHz;VB 10 Hz;Pk
1597.040	58.0	V	74.0	-16.0	PK	188	1.0	RB 1 MHz;VB 3 MHz;Pk
1597.390	34.0	V	54.0	-20.0	AVG	188	1.0	RB 1 MHz;VB 10 Hz;Pk
1194.610	53.9	V	74.0	-20.1	PK	283	1.0	RB 1 MHz;VB 3 MHz;Pk
2994.770	49.6	H	-	-	PK	269	1.0	Note 3
1030.000	28.6	V	54.0	-25.4	AVG	204	1.0	RB 1 MHz;VB 10 Hz;Pk
1032.070	39.4	V	74.0	-34.6	PK	204	1.0	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Emission in non-restricted band, refer to antenna port measurements.

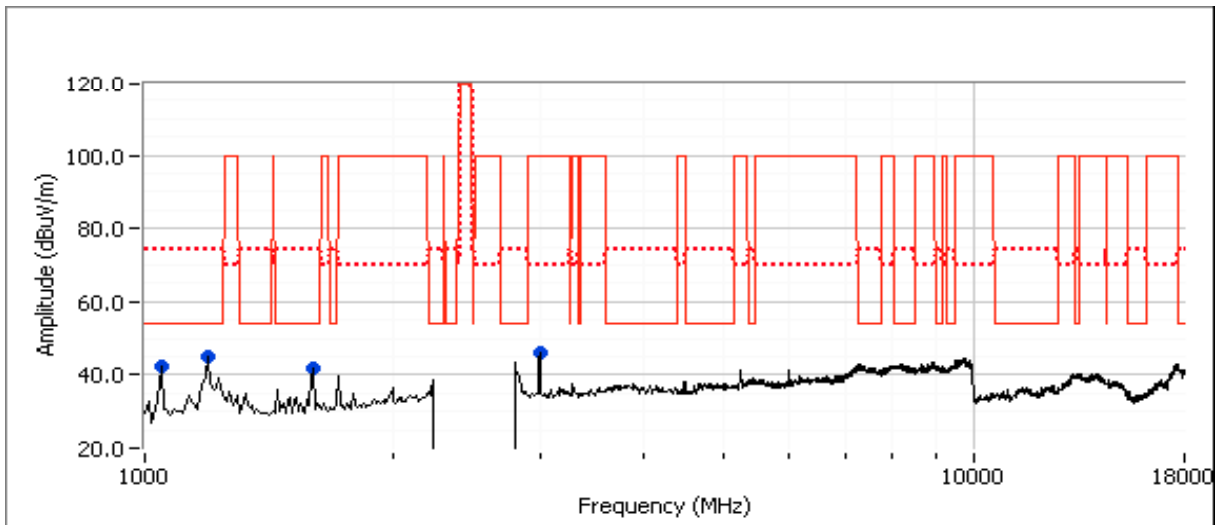

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 4, Radiated Spurious Emissions, 1-7.5GHz, Receive, Chain A

Date of Test: 8/1/2011


Test Location: FT Chamber #4

Test Engineer: Rafael Varelas

Config Change: None

Run # 4a, EUT on Channel #6 2437MHz - Receive, Chain A

Frequency MHz	Level dB μ V/m	Pol v/h	RSS 210		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2994.700	49.0	V	54.0	-5.0	AVG	148	1.0	RB 1 MHz;VB 10 Hz;Pk
2994.700	51.2	V	74.0	-22.8	PK	148	1.0	RB 1 MHz;VB 3 MHz;Pk
1188.810	47.6	V	54.0	-6.4	AVG	276	1.4	RB 1 MHz;VB 10 Hz;Pk
1188.570	49.6	V	74.0	-24.4	PK	276	1.4	RB 1 MHz;VB 3 MHz;Pk
1593.950	35.0	V	54.0	-19.0	AVG	124	1.0	RB 1 MHz;VB 10 Hz;Pk
1594.510	55.6	V	74.0	-18.4	PK	124	1.0	RB 1 MHz;VB 3 MHz;Pk

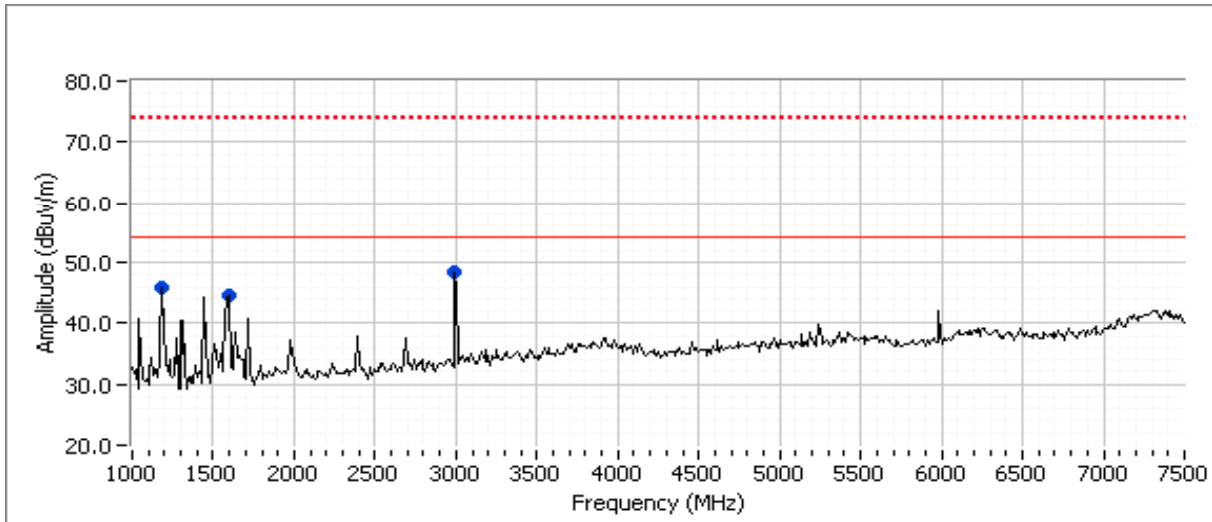

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Summary of Results - Device Operating in the 5725 - 5850 MHz Band

SCU:

Run #	Mode	Channel	Antenna	Measured Power	Test Performed	Limit	Result / Margin
Run # 1	802.11n20 Chain A	#149 5745MHz	H&S	-	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15.247	50.1dBµV/m @ 2392.9MHz (-3.9dB)
		#157 5785MHz	H&S	-			49.6dBµV/m @ 2390.8MHz (-4.4dB)
		#161 5805MHz	H&S	-			48.6dBµV/m @ 2994.7MHz (-5.4dB)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Notes:

Preliminary testing showed no emissions below 1 GHz related to the radio
Antenna: H&S

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 1, Radiated Spurious Emissions, 1-40GHz, Chain A

Date of Test: 11/7/2011

Test Location: FT Chamber#4

Test Engineer: Joseph Cadigal

Config Change: none


**Run # 1a, EUT on Channel #149, 5745MHz - 802.11n20, Chain A
WB40**

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2392.880	50.1	V	54.0	-3.9	PK	179	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
5240.650	49.0	V	54.0	-5.0	PK	169	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
2994.700	43.7	V	54.0	-10.3	PK	119	1.3	RB 1 MHz;VB 3 MHz;Pk, note 3
11490.170	39.0	H	54.0	-15.0	AVG	344	1.6	RB 1 MHz;VB 10 Hz;Pk
3820.210	32.4	V	54.0	-21.6	AVG	247	1.3	RB 1 MHz;VB 10 Hz;Pk
11491.060	51.6	H	74.0	-22.4	PK	344	1.6	RB 1 MHz;VB 3 MHz;Pk
1593.310	27.8	V	54.0	-26.2	AVG	333	1.6	RB 1 MHz;VB 10 Hz;Pk
3820.800	44.2	V	74.0	-29.8	PK	247	1.3	RB 1 MHz;VB 3 MHz;Pk
1595.170	43.5	V	74.0	-30.5	PK	333	1.6	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Emission in non-restricted band, the restricted band limit was used. Peak measurement vs average limit.

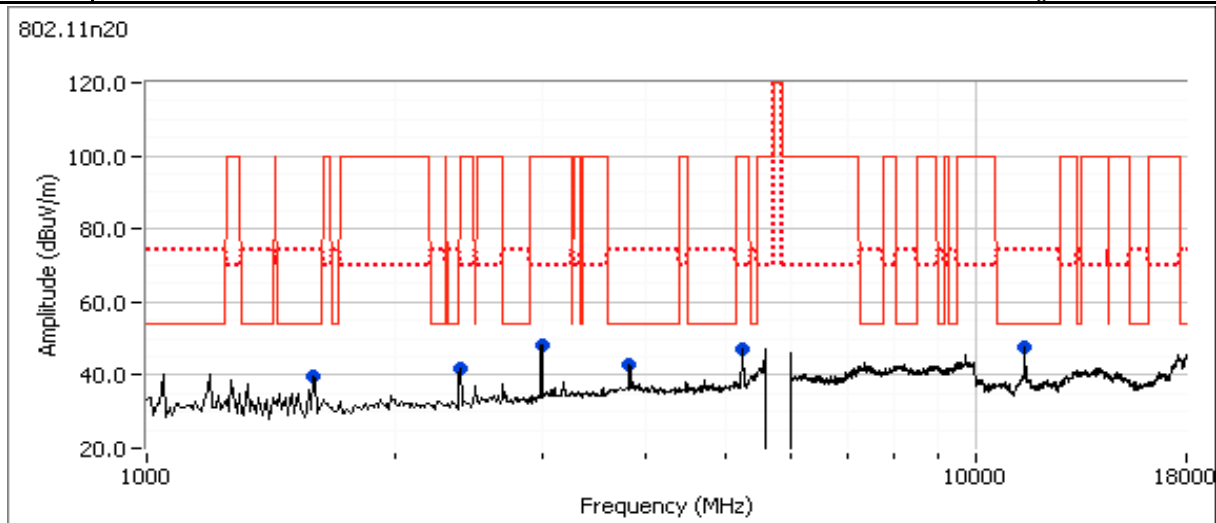


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 1b: , EUT on Channel #157 5785MHz - 802.11n20, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2390.830	49.6	V	54.0	-4.4	PK	297	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
2994.580	48.2	V	54.0	-5.8	PK	126	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
5246.460	46.1	V	54.0	-7.9	PK	159	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
3856.520	32.0	V	54.0	-22.0	AVG	94	1.6	RB 1 MHz;VB 10 Hz;Pk
11567.060	28.8	V	54.0	-25.2	AVG	268	1.9	RB 1 MHz;VB 10 Hz;Pk
3856.350	42.6	V	74.0	-31.4	PK	94	1.6	RB 1 MHz;VB 3 MHz;Pk
11568.710	40.2	V	74.0	-33.8	PK	268	1.9	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
- Note 2: Scans made between 18 - 40GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range
- Note 3: Emission in non-restricted band, the restricted band limit was used. Peak measurement vs average limit.

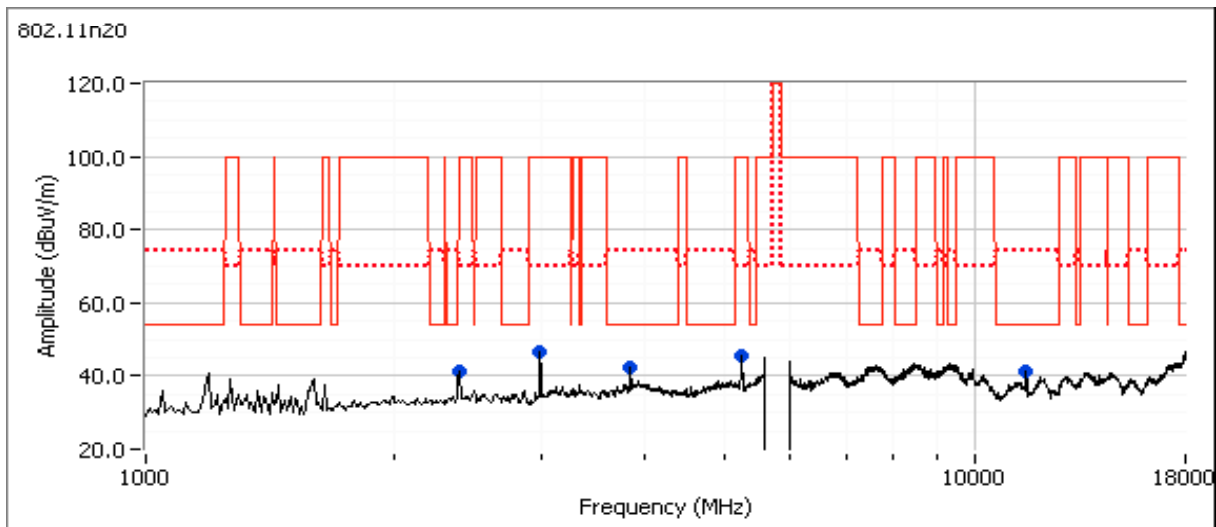

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A


Run # 1c : , EUT on Channel #161 5805MHz - 802.11n20, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2994.710	48.6	V	54.0	-5.4	PK	120	1.3	RB 1 MHz;VB 3 MHz;Pk, note 3
5220.750	43.6	V	54.0	-10.4	PK	177	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
2389.970	31.9	V	54.0	-22.1	AVG	309	1.0	RB 1 MHz;VB 10 Hz;Pk
3869.940	31.8	V	54.0	-22.2	AVG	79	1.3	RB 1 MHz;VB 10 Hz;Pk
1597.770	48.7	V	74.0	-25.3	PK	331	1.0	RB 1 MHz;VB 3 MHz;Pk
2389.970	48.4	V	74.0	-25.6	PK	309	1.0	RB 1 MHz;VB 3 MHz;Pk
11585.190	28.1	V	54.0	-25.9	AVG	86	2.2	RB 1 MHz;VB 10 Hz;Pk
1596.860	27.2	V	54.0	-26.8	AVG	331	1.0	RB 1 MHz;VB 10 Hz;Pk
3871.180	43.1	V	74.0	-30.9	PK	79	1.3	RB 1 MHz;VB 3 MHz;Pk
11587.880	38.9	V	74.0	-35.1	PK	86	2.2	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Emission in non-restricted band, the restricted band limit was used. Peak measurement vs average limit.

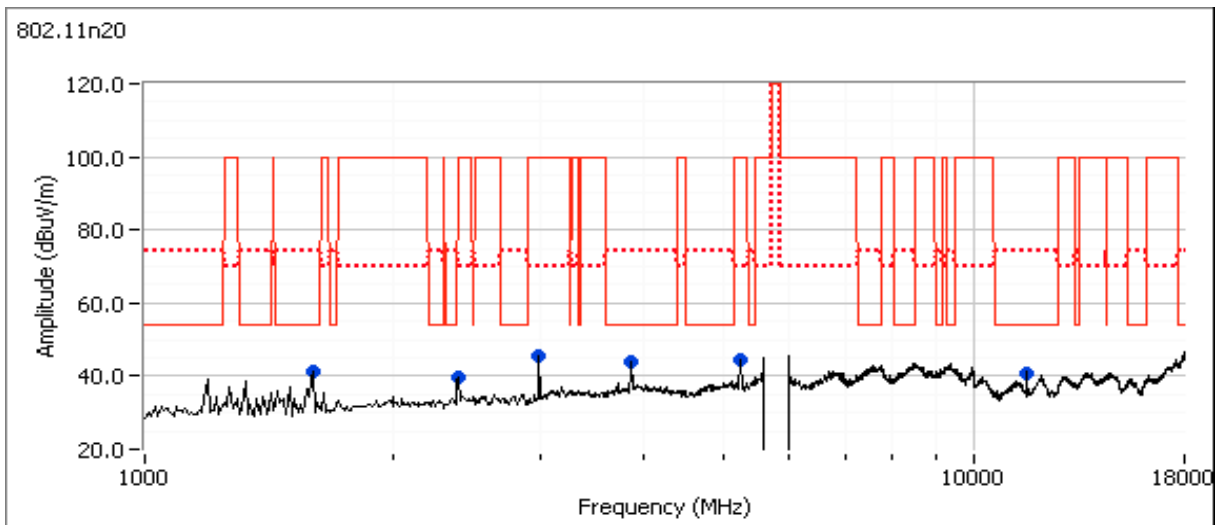

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Summary of Results - Device Operating in the 5725 - 5850 MHz Band

Run #	Mode	Channel	Antenna	Power Setting	Test Performed	Limit	Result / Margin
Run # 1	802.11n20 Chain A	#149 5745MHz	Larsen	-	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15.247	46.5dBµV/m @ 2392.5MHz (-7.5dB)
		#157 5785MHz	Larsen	-			52.5dBµV/m @ 11568.9MHz (-1.5dB)
		#161 5805MHz	Larsen	-			53.8dBµV/m @ 11608.7MHz (-0.2dB)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Notes:

Preliminary testing showed no emissions below 1 GHz related to the radio
Antenna: Larsen

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 1, Radiated Spurious Emissions, 1-40GHz, Chain A

Date of Test: 11/8/2011
 Test Engineer: Joseph Cadigal
 Test Location: FT Chamber#5
 Config Change: none


**Run # 1a, EUT on Channel #149, 5745MHz - 802.11n20, Chain A
 WB40**

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2392.460	46.5	V	54.0	-7.5	PK	360	1.6	RB 1 MHz;VB 3 MHz;Pk, note 3
5233.360	45.5	H	54.0	-8.5	PK	206	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
2987.850	43.7	V	54.0	-10.3	PK	156	1.0	RB 1 MHz;VB 3 MHz;Pk, note 3
1597.320	51.8	V	74.0	-22.2	PK	146	1.0	RB 1 MHz;VB 3 MHz;Pk
1597.210	29.9	V	54.0	-24.1	AVG	146	1.0	RB 1 MHz;VB 10 Hz;Pk
1049.960	27.3	V	54.0	-26.7	AVG	242	1.9	RB 1 MHz;VB 10 Hz;Pk
1048.620	40.8	V	74.0	-33.2	PK	242	1.9	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 3: Emission in non-restricted band, the restricted band limit was used. Peak measurement vs average limit.

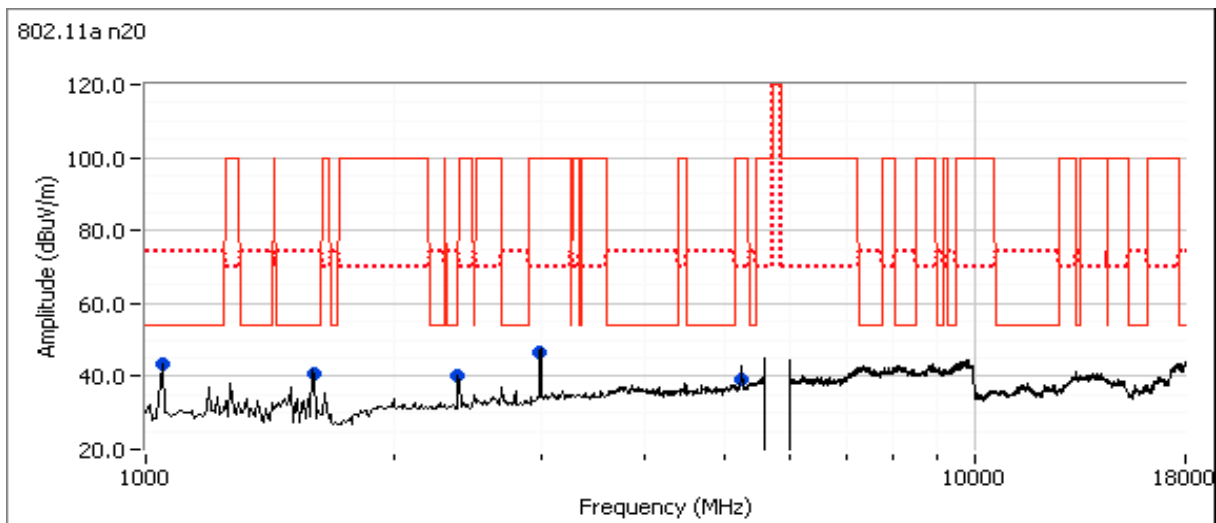


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 1b: , EUT on Channel #157 5785MHz - 802.11n20, Chain A

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
11568.910	52.5	V	54.0	-1.5	AVG	341	1.0	RB 1 MHz;VB 10 Hz;Pk
11571.410	64.1	V	74.0	-9.9	PK	341	1.0	RB 1 MHz;VB 3 MHz;Pk
1189.050	40.6	V	54.0	-13.4	AVG	199	1.0	RB 1 MHz;VB 10 Hz;Pk
1187.560	44.1	V	74.0	-29.9	PK	199	1.0	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
- Note 2: Scans made between 12 - 40GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

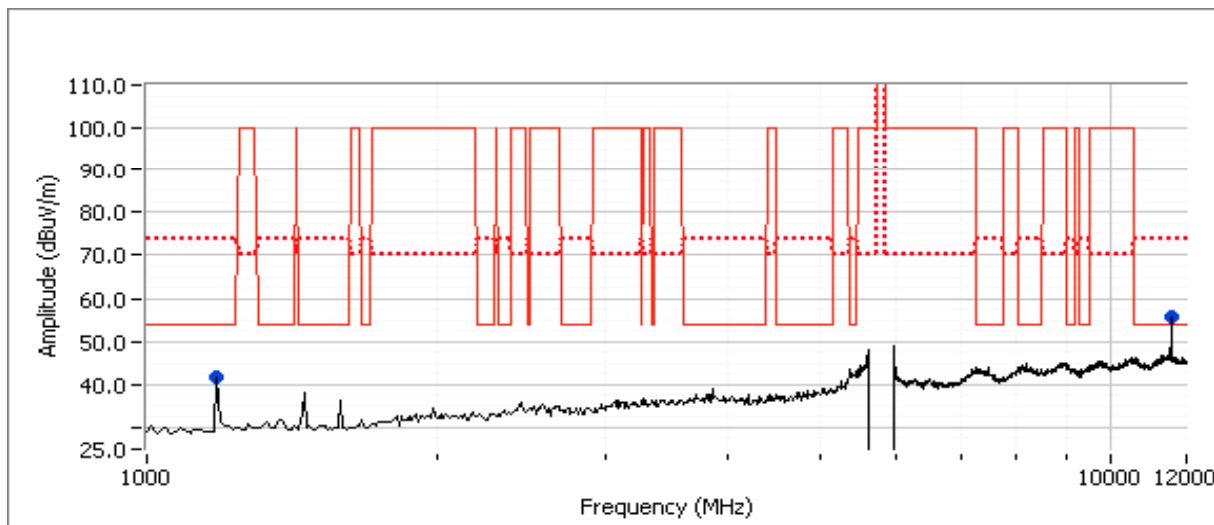

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 1c : EUT on Channel #161 5805MHz - 802.11n20, Chain A

Date of Test: 11/14/2011

Test Engineer: Rafael Varelas


Test Location: FT Chamber#5

Config Change: none

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
11608.700	53.8	V	54.0	-0.2	AVG	353	1.4	RB 1 MHz;VB 10 Hz;Pk
11608.470	67.5	V	74.0	-6.5	PK	353	1.4	RB 1 MHz;VB 3 MHz;Pk
1597.320	33.8	V	54.0	-20.2	AVG	163	1.0	RB 1 MHz;VB 10 Hz;Pk
1596.050	56.3	V	74.0	-17.7	PK	163	1.0	RB 1 MHz;VB 3 MHz;Pk

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

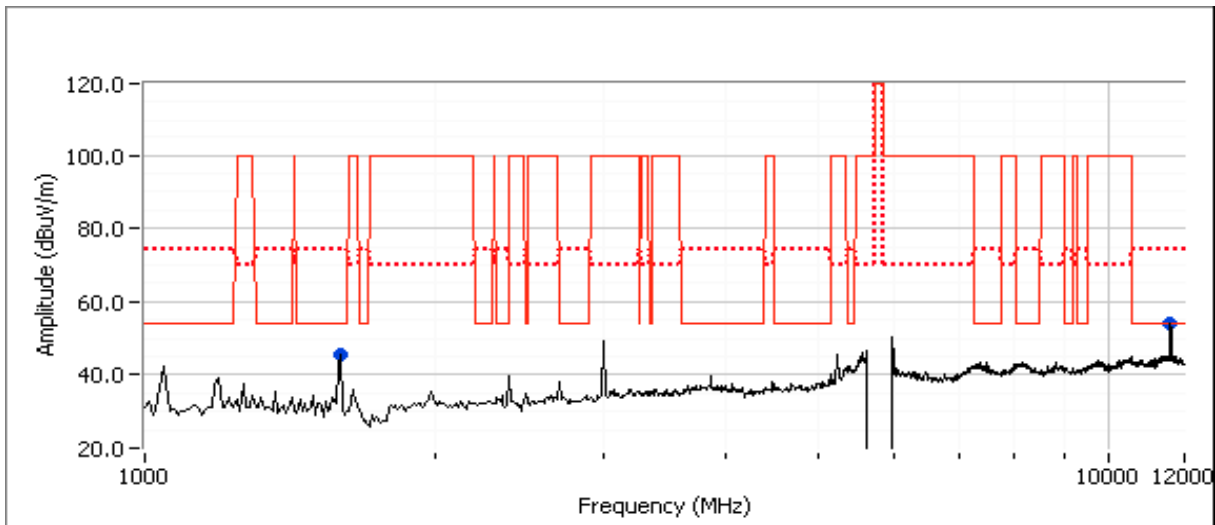

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Summary of Results - Device Operating in the 5725 - 5850 MHz Band

New Module #2011-1259, Laptop #2011-2312

Run #	Mode	Channel	Antenna	Power Setting	Test Performed	Limit	Result / Margin
Run # 1	802.11n20 Chain A	#149 5745MHz	Ethertronic s	-	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15.247	49.9dB μ V/m @ 11490.4MHz (-4.1dB)
		#157 5785MHz	Ethertronic s	-			44.5dB μ V/m @ 1188.4MHz (-9.5dB)
		#161 5805MHz	Ethertronic s	-			47.5dB μ V/m @ 1453.2MHz (-6.5dB)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Notes:

Preliminary testing showed no emissions below 1 GHz related to the radio
Antenna: Ethertronics

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 1, Radiated Spurious Emissions, 1-40GHz, 802.11n20, Chain A

Run # 1a, EUT on Channel #149 5745MHz - 802.11n20, Chain A

Date of Test: 11/4/2011
Test Engineer: John Caizzi


Test Location: FT4
Config Change: none

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
11490.400	49.9	H	54.0	-4.1	AVG	16	1.0	
11485.730	60.2	H	74.0	-13.8	PK	16	1.0	
1197.900	31.9	V	54.0	-22.1	AVG	264	1.0	
1197.100	45.9	V	74.0	-28.1	PK	264	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 2: Emission is not in restricted band, but the more stringent restricted band limit was used.

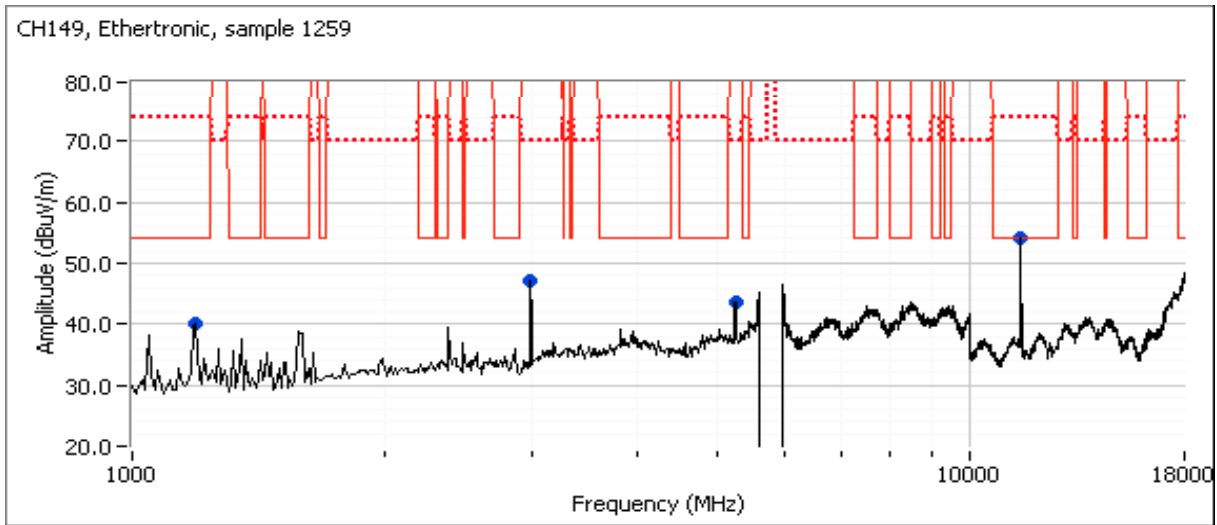


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 1b: , EUT on Channel #157 5785MHz - 802.11n20, Chain A
 Date of Test: 11/7/2011 Test Location: FT5
 Test Engineer: Jack Liu Config Change: non

Spurious Radiated Emissions:

Frequency MHz	Level dB μ V/m	Pol v/h	15.209/15.247		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1188.400	44.5	H	54.0	-9.5	AVG	207	1.3	
1188.400	35.4	H	74.0	-38.6	PK	207	1.3	
1453.170	43.0	H	54.0	-11.0	AVG	24	1.6	
1453.570	46.0	H	74.0	-28.0	PK	24	1.6	
11569.800	38.9	V	54.0	-15.1	AVG	257	1.6	
11571.470	51.5	V	74.0	-22.5	PK	257	1.6	

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.
- Note 2: Scans made between 18 - 40GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

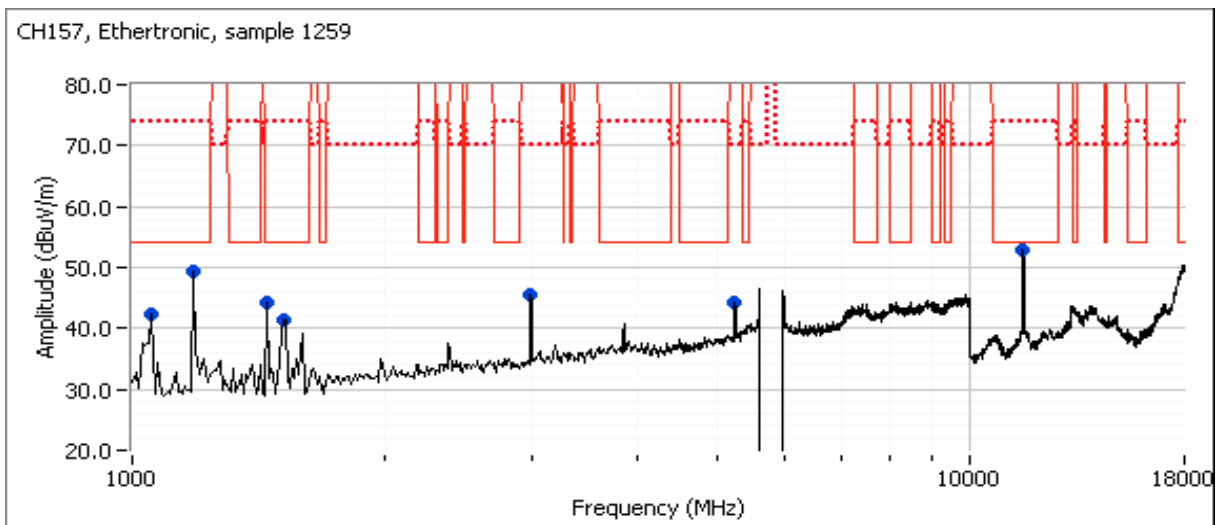

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A


Run # 1c : EUT on Channel #161 5805MHz - 802.11n20, Chain A
 Date of Test: 11/7/2011 Test Location: FT5
 Test Engineer: Jack Liu Config Change: non

Spurious Radiated Emissions:

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
1453.240	47.5	H	54.0	-6.5	AVG	29	1.0	
1189.460	45.2	H	54.0	-8.8	AVG	221	1.9	
11607.730	36.6	V	54.0	-17.4	AVG	254	1.2	
11608.600	48.6	V	74.0	-25.4	PK	254	1.2	
1455.900	44.9	H	74.0	-29.1	PK	29	1.0	
1199.800	39.3	H	74.0	-34.7	PK	221	1.9	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit is -30dBc for peak measurements in a measurement bandwidth of 100kHz.

Note 2: Emission is not in restricted band, but the more stringent restricted band limit was used.

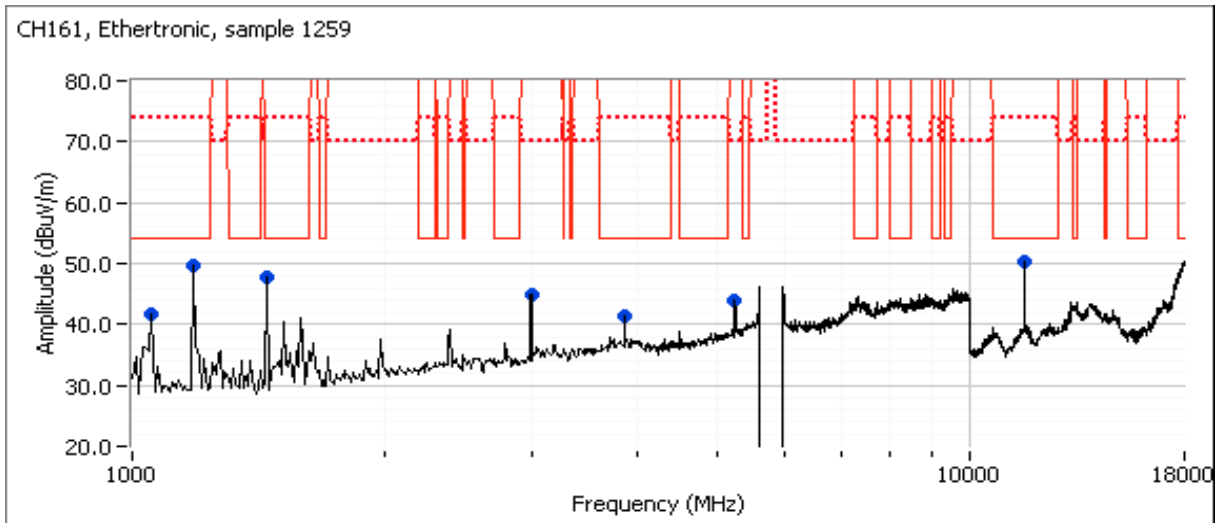

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS-GEN Radiated Spurious Emissions

Summary of Results - Device Operating in the 5725 - 5850 MHz Band

New Module #2011-1296, Laptop #2011-2312, Linux Shell

Run #	Mode	Channel	Antenna	Power Setting	Test Performed	Limit	Result / Margin
Receiver Spurious Emissions							
Run # 3	Receive Chain A	#157, Chain A	Ethertronics	-	Radiated Emissions, 1 - 18 GHz	RSS-GEN	48.0dBμV/m @ 1585.1MHz (-6.0dB)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Notes:

Preliminary testing showed no emissions below 1 GHz related to the radio
Antenna: Ethertronics

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3, Radiated Spurious Emissions, 1-18GHz, Receive, Chain A

Date of Test: 8/18/2011


Test Location: FT Chamber#7

Test Engineer: Joseph Cadigal

Config Change: none

Run # 3a, EUT on Channel #157, 5785MHz - Receive, Chain A

Frequency MHz	Level dB μ V/m	Pol v/h	RSS-GEN		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1585.080	48.0	H	54.0	-6.0	AVG	289	1.0	RB 1 MHz;VB 10 Hz;Pk
2994.680	45.6	V	54.0	-8.4	AVG	170	1.0	RB 1 MHz;VB 10 Hz;Pk
1452.780	43.5	H	54.0	-10.5	AVG	289	1.0	RB 1 MHz;VB 10 Hz;Pk
5242.150	33.5	V	54.0	-20.5	AVG	243	1.0	RB 1 MHz;VB 10 Hz;Pk
1586.060	52.3	H	74.0	-21.7	PK	289	1.0	RB 1 MHz;VB 3 MHz;Pk
2994.810	49.7	V	74.0	-24.3	PK	170	1.0	RB 1 MHz;VB 3 MHz;Pk
1454.240	49.2	H	74.0	-24.8	PK	289	1.0	RB 1 MHz;VB 3 MHz;Pk
5241.840	47.1	V	74.0	-26.9	PK	243	1.0	RB 1 MHz;VB 3 MHz;Pk

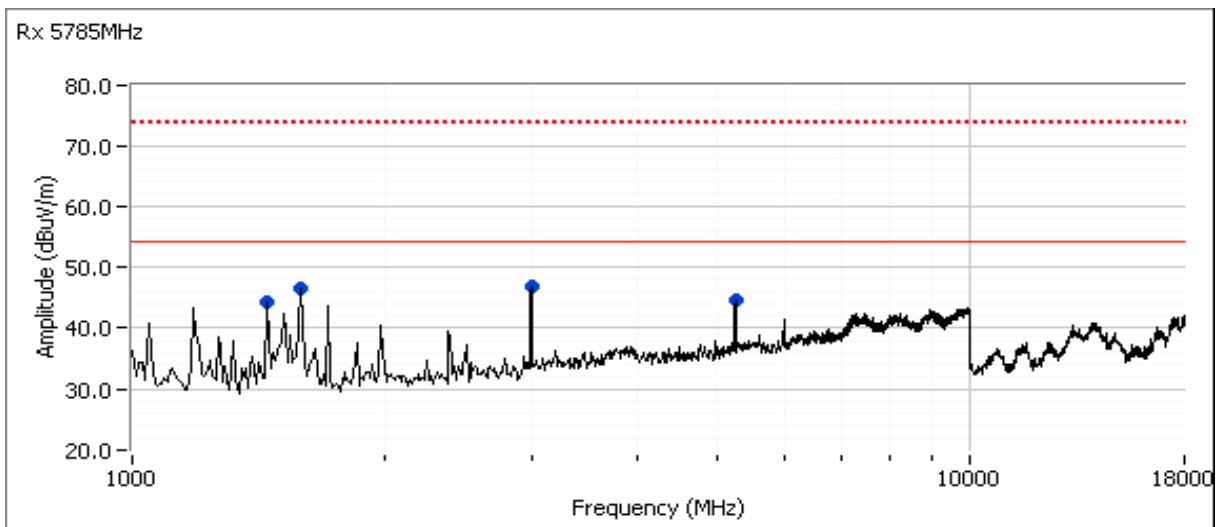

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS-GEN Radiated Spurious Emissions

Summary of Results - Device Operating in the 5725 - 5850 MHz Band

SCU: v3.03.01

Run #	Mode	Channel	Antenna	Measured Power	Test Performed	Limit	Result / Margin
Receiver Spurious Emissions							
Run # 3	Receive Chain A	#157, Chain A	H&S	-	Radiated Emissions, 1 - 18 GHz	RSS-GEN	45.1dBµV/m @ 2994.7MHz (-8.9dB)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Notes:

Preliminary testing showed no emissions below 1 GHz related to the radio
Antenna: H&S

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3, Radiated Spurious Emissions, 1-18GHz, Receive, Chain A

Date of Test: 8/2/2011


Test Location: FT Chamber#7

Test Engineer: Joseph Cadigal

Config Change: none

Run # 3a, EUT on Channel #157, 5785MHz - Receive, Chain A

Frequency MHz	Level dB μ V/m	Pol v/h	RSS-GEN		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2994.690	45.1	V	54.0	-8.9	AVG	190	1.6	RB 1 MHz;VB 10 Hz;Pk
1599.570	59.1	V	74.0	-14.9	PK	173	1.0	RB 1 MHz;VB 3 MHz;Pk
1597.360	36.7	V	54.0	-17.3	AVG	173	1.0	RB 1 MHz;VB 10 Hz;Pk
5240.460	36.7	V	54.0	-17.3	AVG	180	1.3	RB 1 MHz;VB 10 Hz;Pk
2994.780	51.1	V	74.0	-22.9	PK	190	1.6	RB 1 MHz;VB 3 MHz;Pk
5240.800	50.5	V	74.0	-23.5	PK	180	1.3	RB 1 MHz;VB 3 MHz;Pk
1048.970	29.9	V	54.0	-24.1	AVG	226	1.0	RB 1 MHz;VB 10 Hz;Pk
1048.220	47.3	V	74.0	-26.7	PK	226	1.0	RB 1 MHz;VB 3 MHz;Pk

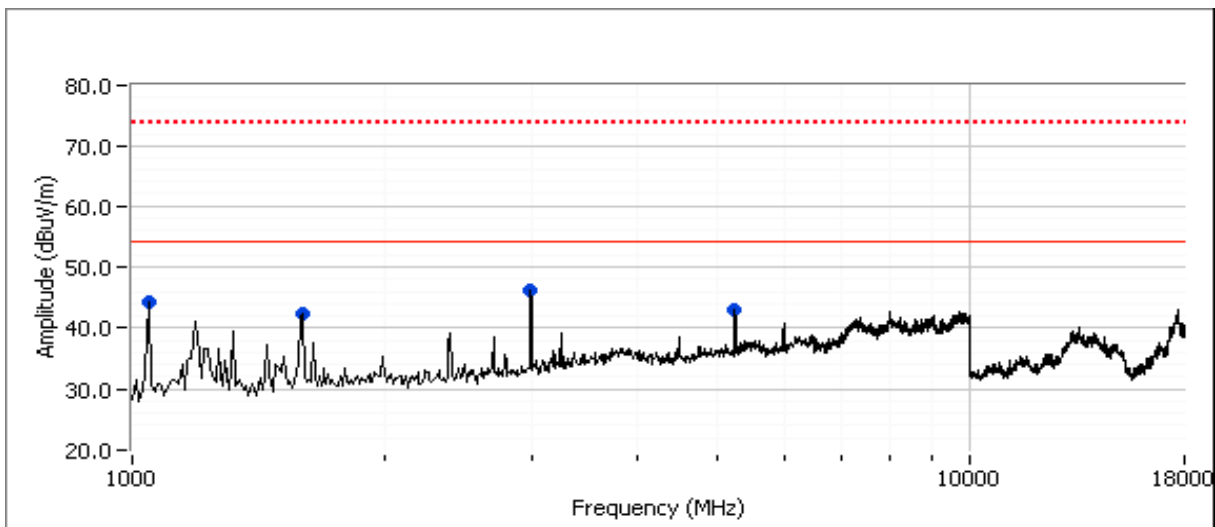

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS-GEN Radiated Spurious Emissions

Summary of Results - Device Operating in the 5725 - 5850 MHz Band

Run #	Mode	Channel	Antenna	Power Setting	Test Performed	Limit	Result / Margin
Receiver Spurious Emissions							
Run # 3	Receive Chain A	#157, Chain A	Larsen	-	Radiated Emissions, 1 - 18 GHz	RSS-GEN	45.8dBµV/m @ 2994.7MHz (-8.2dB)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 20-25 °C
 Rel. Humidity: 40-50 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Notes:

Preliminary testing showed no emissions below 1 GHz related to the radio
 Antenna: Larsen

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run # 3, Radiated Spurious Emissions, 1-18GHz, Receive, Chain A

Date of Test: 8/2/2011


Test Location: FT Chamber #7

Test Engineer: Rafael Varelas

Config Change: None

Run # 3a, EUT on Channel #157, 5785MHz - Receive, Chain A

Frequency MHz	Level dB μ V/m	Pol v/h	RSS-GEN		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2994.690	45.8	H	54.0	-8.2	AVG	261	1.0	RB 1 MHz;VB 10 Hz;Pk
2994.610	49.9	H	74.0	-24.1	PK	261	1.0	RB 1 MHz;VB 3 MHz;Pk
1596.760	37.4	V	54.0	-16.6	AVG	160	1.2	RB 1 MHz;VB 10 Hz;Pk
1595.230	58.7	V	74.0	-15.3	PK	160	1.2	RB 1 MHz;VB 3 MHz;Pk
1047.990	32.2	V	54.0	-21.8	AVG	175	1.1	RB 1 MHz;VB 10 Hz;Pk
1047.850	51.2	V	74.0	-22.8	PK	175	1.1	RB 1 MHz;VB 3 MHz;Pk

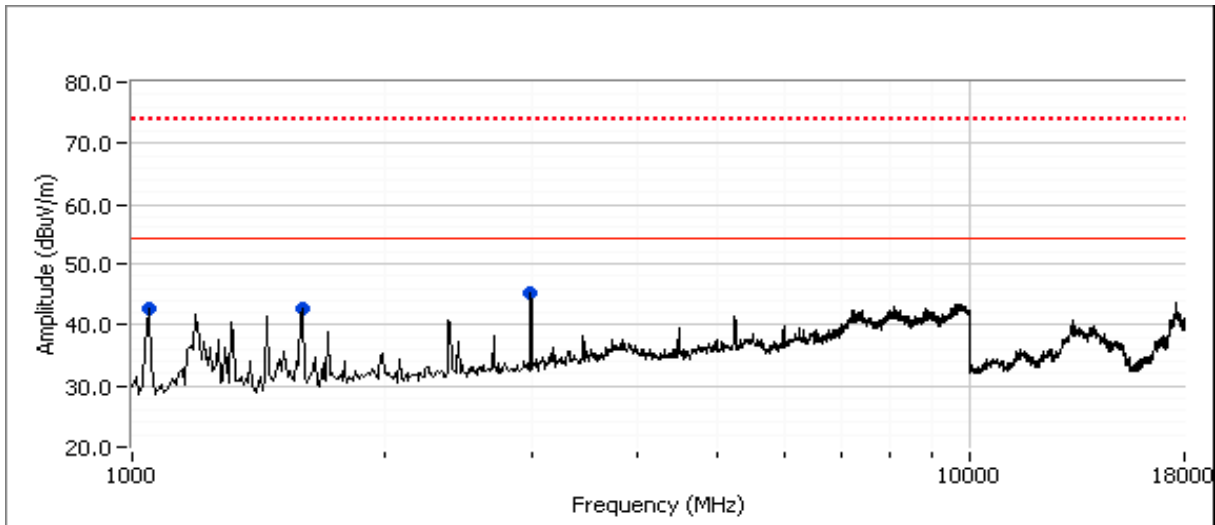

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements
Power, PSD, Bandwidth and Spurious Emissions (802.11b Mode)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 8/23/2011
Test Engineer: John Caizzi / Rafael Varelas
Test Location: FT4 and Lab #4

Config. Used: 2
Config Change: no antennas
EUT Voltage: 3.3 VDC

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 23 °C
Rel. Humidity: 37 %

Summary of Results

Run #	Pwr setting	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	Output Power	15.247(b)	Pass	15.2 dBm
2	-	Power spectral Density (PSD)	15.247(d)	Pass	-5.3 dBm/3kHz
3	-	Minimum 6dB Bandwidth	15.247(a)	Pass	9.0 MHz
3	-	99% Bandwidth	RSS GEN	-	12.8 MHz
4	-	Spurious emissions	15.247(b)	Pass	All emissions < -30 dBc

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard


No deviations were made from the requirements of the standard.

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1: Output Power

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP ^{Note 2}		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
-	2412	14.5	27.9	3.0	Pass	17.5	0.056	14.5	28.2
-	2437	15.2	33.1	3.0	Pass	18.2	0.066	15.4	34.7
-	2462	14.4	27.5	3.0	Pass	17.4	0.055	15.9	38.9

- Note 1: Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was not continuous but the PSA analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
- Note 2: Power setting - the software power setting used during testing, included for reference only.
- Note 3: Power measured with a peak power meter for reference purposes only @ 100%.

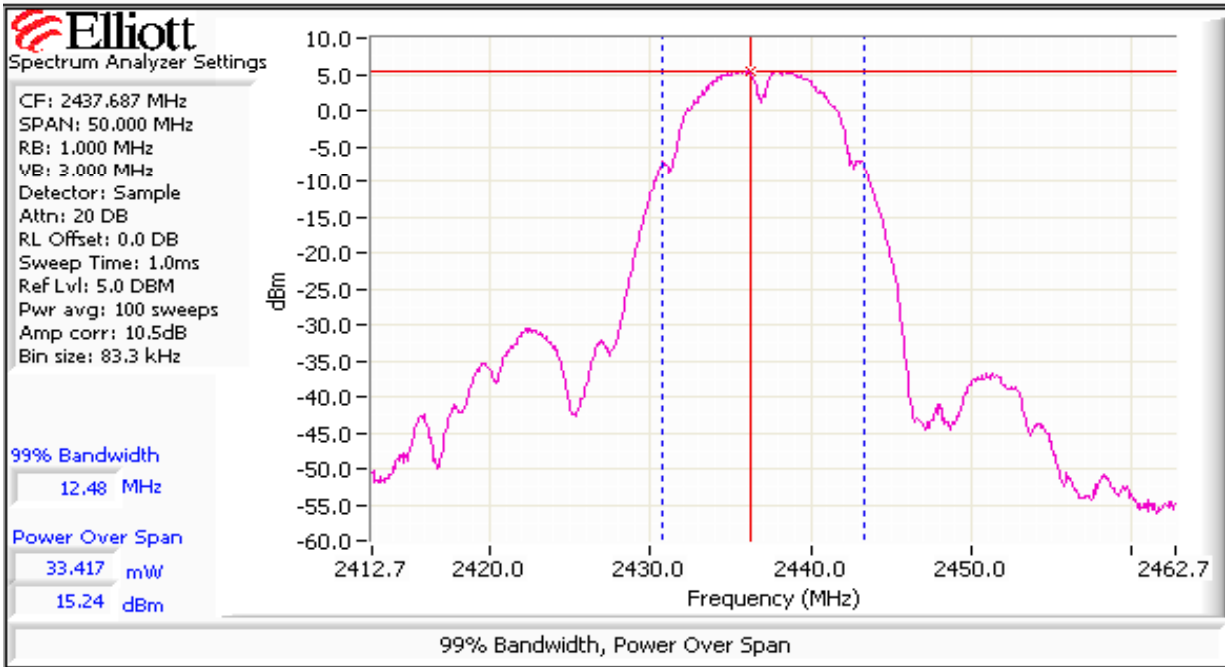


Client: Summit Data Communications	Job Number: J78403
Model: SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number: T80878
	Account Manager: Christine Krebill
Contact: Ron Seide	
Standard: FCC 15.247/RSS-210	Class: N/A

Run #2: Power spectral Density


Power Setting	Frequency (MHz)	PSD	Limit dBm/3kHz	Result
		(dBm/3kHz) ^{Note 1}		
-	2412.697	-7.5	8.0	Pass
-	2437.7377	-5.3	8.0	Pass
-	2461.1764	-6.2	8.0	Pass


Note 1: Power spectral density measured using RB=3 kHz, VB=10kHz, analyzer with peak detector and with a sweep time set to ensure a dwell time of at least 1 second per 3kHz. The measurement is made at the frequency of PPSD determined from preliminary scans using RB=3kHz using multiple sweeps at a faster rate over the 6dB bandwidth of the signal.

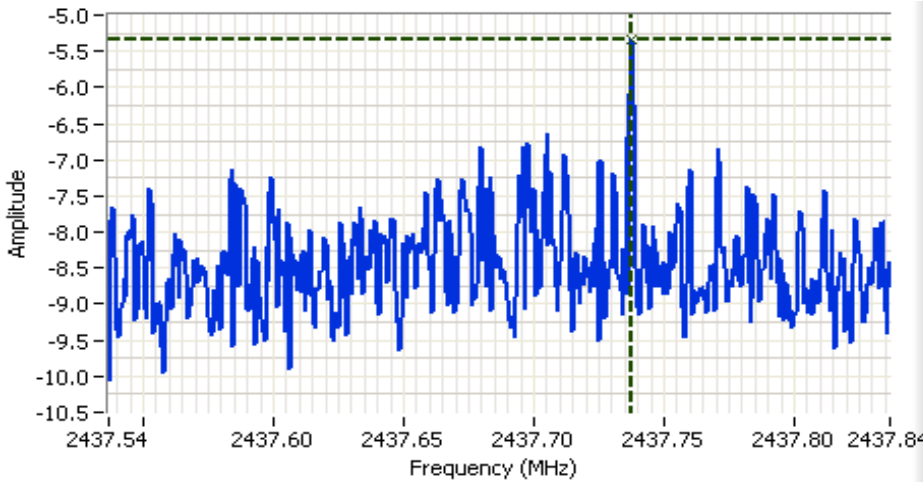

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2437.687 MHz
 SPAN: 300 kHz
 RB: 3.00 kHz
 VB: 10.0 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 100.0s
 Ref Lvl: 1.5 DBM

Comments
 PSD = -5.3 dBm/3kHz
 802.11b

Cursor 1 2437.7377 -5.34 


0.0000 0.00 

Client: Summit Data Communications	Job Number: J78403
Model: SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number: T80878
	Account Manager: Christine Krebill
Contact: Ron Seide	
Standard: FCC 15.247/RSS-210	Class: N/A

Run #3: Signal Bandwidth

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			6dB	99%
-	2412	100kHz	9.0	12.8
-	2437	100kHz	9.1	12.5
-	2462	100kHz	9.1	12.7

Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB

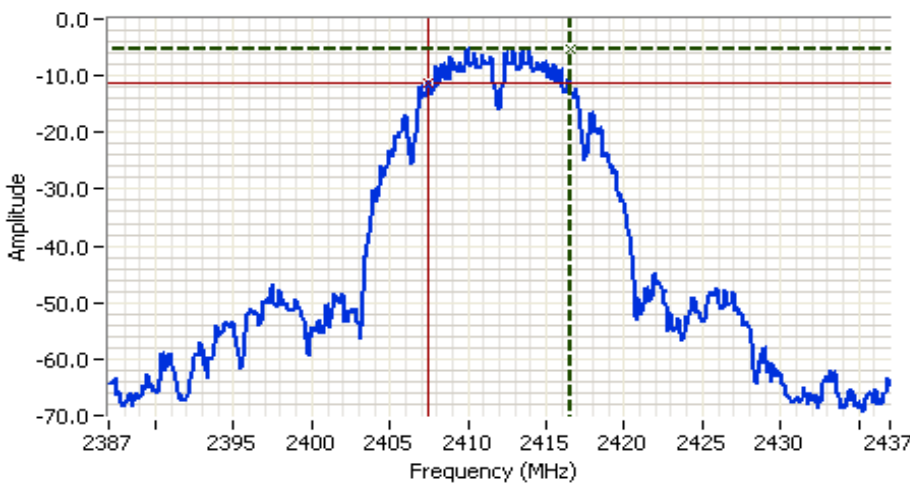

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2412.000 MHz
 SPAN: 50.000 MHz
 RB: 100 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 0.0 DB
 Sweep Time: 6.0ms
 Ref Lvl: 10.0 DBM

Comments
 6dB BW: 9.000 MHz

Cursor 1	2416.5000	-5.34	
Cursor 2	2407.5000	-11.34	

Delta Freq. 9.000
 Delta Amplitude 6.00




Run #4: Out of Band Spurious Emissions


Frequency (MHz)	Limit	Result
2412	-30dBc	Pass
2437	-30dBc	Pass
2462	-30dBc	Pass

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Plots for low channel, power setting = default

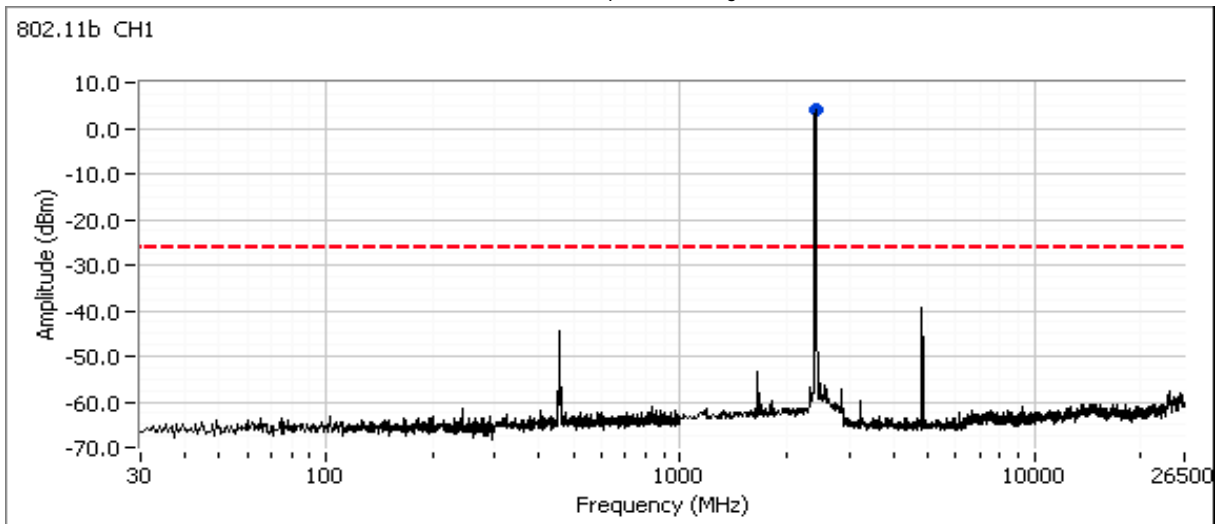


Additional plot showing compliance with -30dBc limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

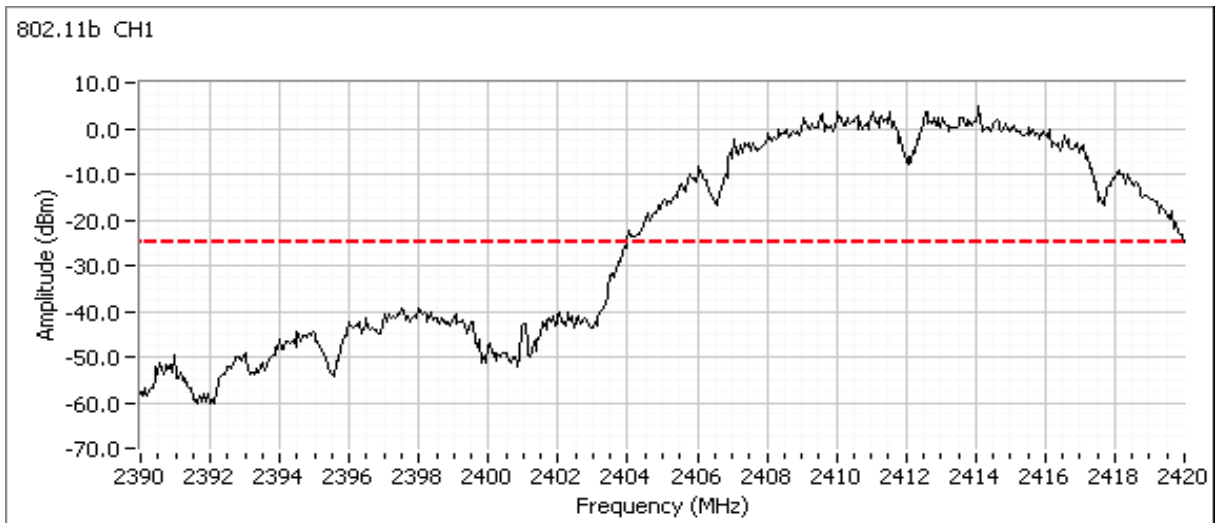


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Plots for center channel, power setting = default

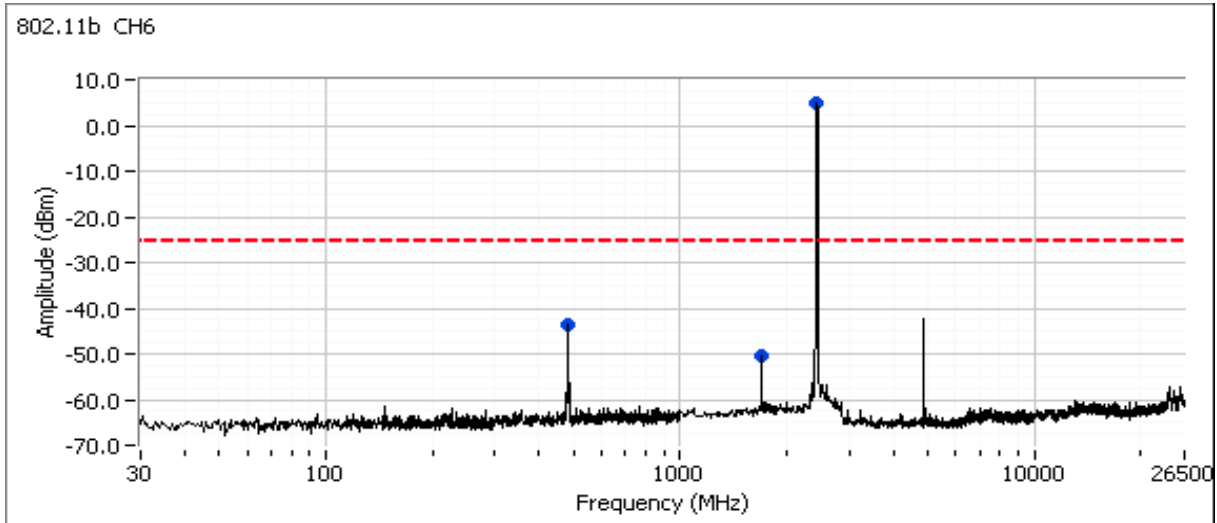

Plots for high channel, power setting = default

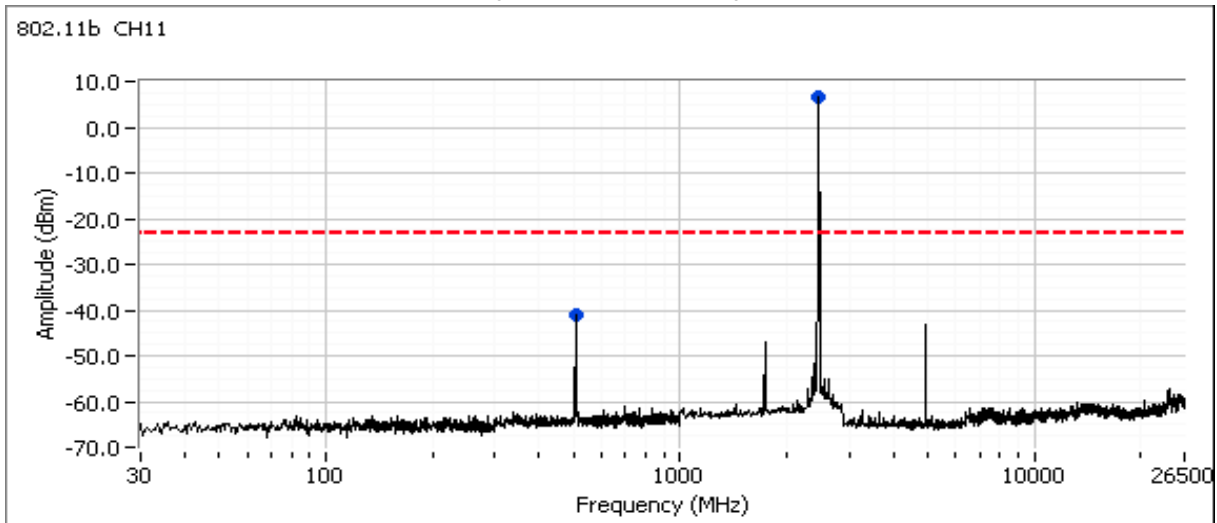

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements
Power, PSD, Bandwidth and Spurious Emissions (802.11g Mode)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 8/23/2011
Test Engineer: John Caizzi / Rafael Varelas
Test Location: FT4 and Lab #4

Config. Used: 2
Config Change: no antennas
EUT Voltage: 3.3 VDC

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 23 °C
Rel. Humidity: 37 %

Summary of Results

Run #	Pwr setting	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	Output Power	15.247(b)	Pass	12.6 dBm
2	-	Power spectral Density (PSD)	15.247(d)	Pass	-11.8 dBm/3kHz
3	-	Minimum 6dB Bandwidth	15.247(a)	Pass	15.1 MHz
3	-	99% Bandwidth	RSS GEN	-	16.7 MHz
4	-	Spurious emissions	15.247(b)	Pass	All emissions < -30 dBc

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard


No deviations were made from the requirements of the standard.

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1: Output Power

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP ^{Note 2}		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
-	2412	11.9	15.5	3.0	Pass	14.9	0.031	17.9	61.7
-	2437	12.6	18.2	3.0	Pass	15.6	0.036	18.1	64.6
-	2462	10.4	11.0	3.0	Pass	13.4	0.022	19.5	89.1

- Note 1: Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was not continuous but the PSA analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
- Note 2: Power setting - the software power setting used during testing, included for reference only.
- Note 3: Power measured with a peak power meter for reference purposes only @ 100%.

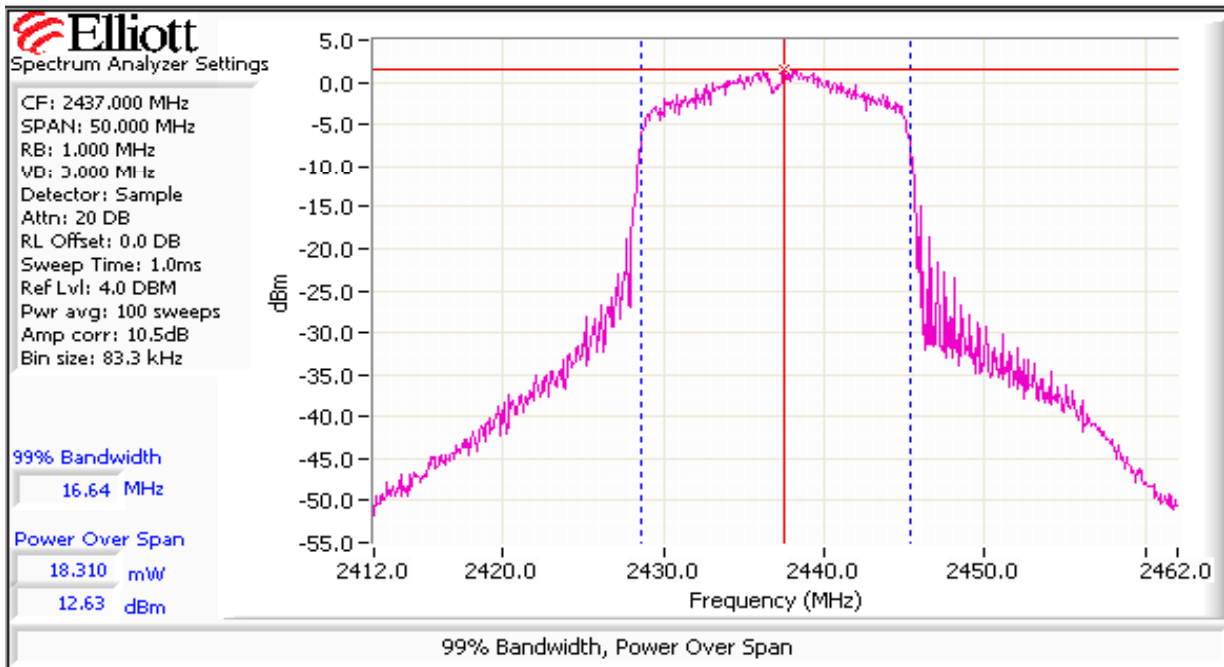


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #2: Power spectral Density

Power Setting	Frequency (MHz)	PSD	Limit dBm/3kHz	Result
		(dBm/3kHz) ^{Note 1}		
-	2414.4868	-13.1	8.0	Pass
-	2436.6389	-11.8	8.0	Pass
-	2459.4993	-14.1	8.0	Pass

Note 1: Power spectral density measured using RB=3 kHz, VB=10kHz, analyzer with peak detector and with a sweep time set to ensure a dwell time of at least 1 second per 3kHz. The measurement is made at the frequency of PPSD determined from preliminary scans using RB=3kHz using multiple sweeps at a faster rate over the 6dB bandwidth of the signal.

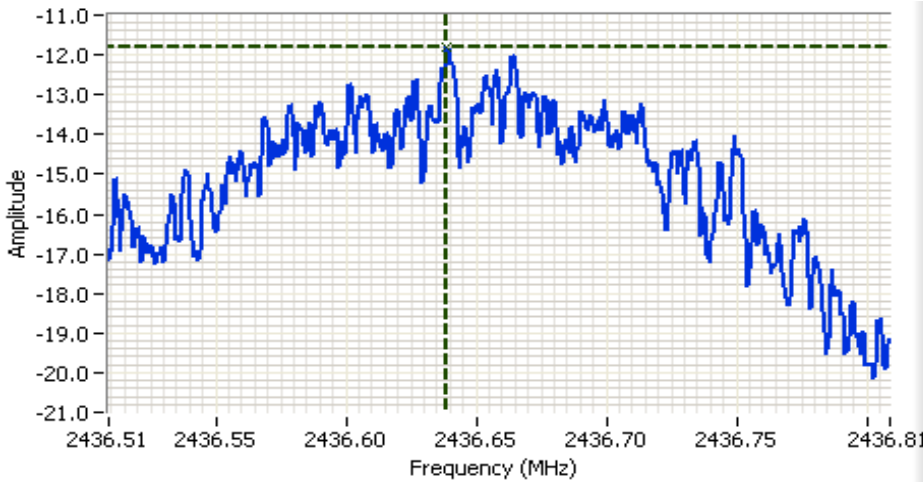

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2436.659 MHz
 SPAN: 300 kHz
 RB: 3.00 kHz
 VB: 10.0 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 100.0s
 Ref Lvl: -3.5 DBM

Comments
 PSD = -11.8 dBm/3kHz
 802.11g


Cursor 1	2436.6389	-11.81	
	0.0000	0.00	

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #3: Signal Bandwidth

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			6dB	99%
-	2412	100kHz	15.2	16.6
-	2437	100kHz	15.1	16.6
-	2462	100kHz	15.1	16.7

Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB

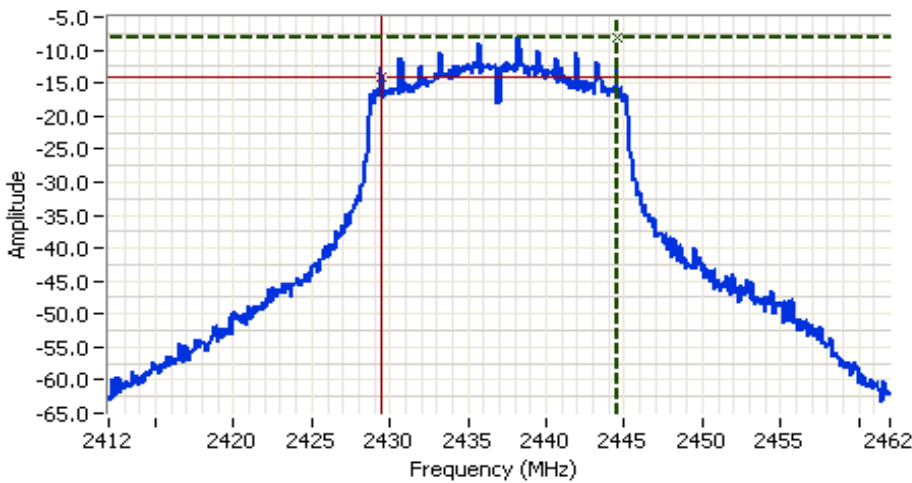

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 50.000 MHz
 RB: 100 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 0.0 DB
 Sweep Time: 6.0ms
 Ref Lvl: -4.0 DBM

Comments
 6dB BW: 15.083 MHz
 802.11g

Cursor 1	2444.5000	-8.12	Delta Freq.	15.083
Cursor 2	2429.4167	-14.12	Delta Amplitude	6.00




Run #4: Out of Band Spurious Emissions


Frequency (MHz)	Limit	Result
2412	-30dBc	Pass
2437	-30dBc	Pass
2462	-30dBc	Pass

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Plots for low channel, power setting = default

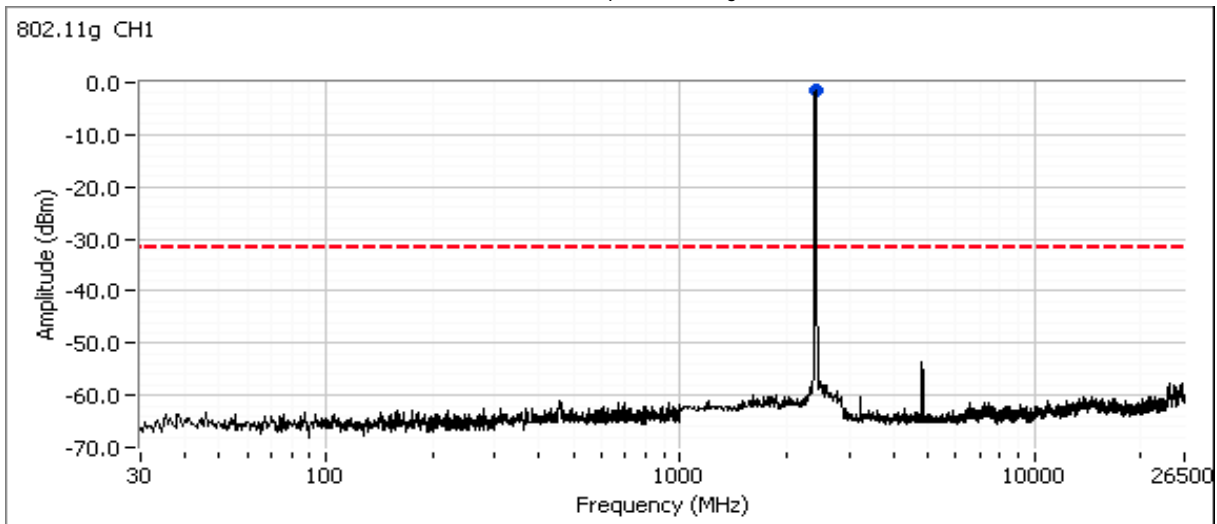


Additional plot showing compliance with -30dBc limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

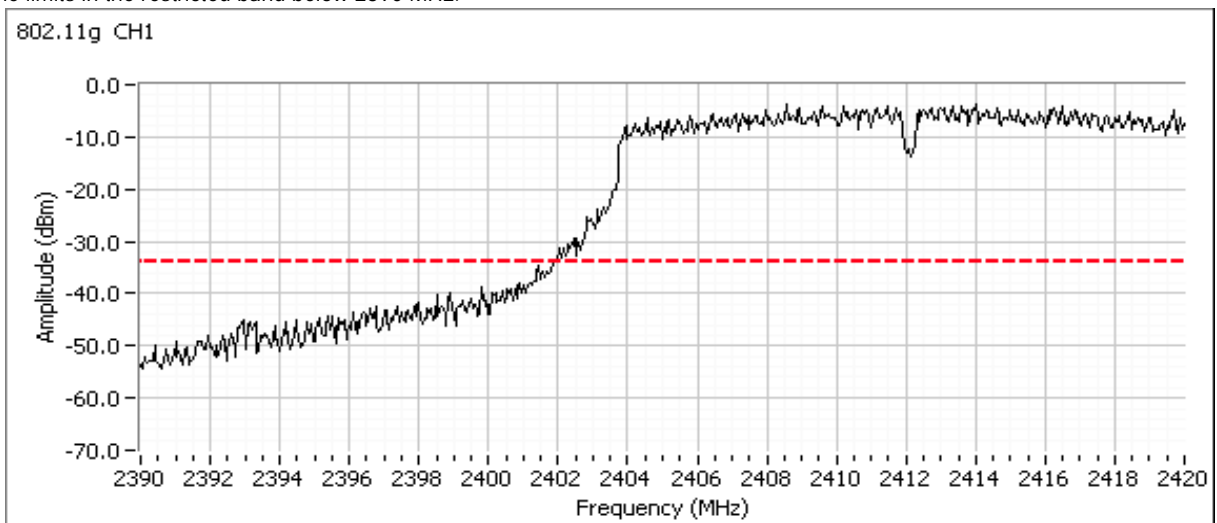


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Plots for center channel, power setting = default

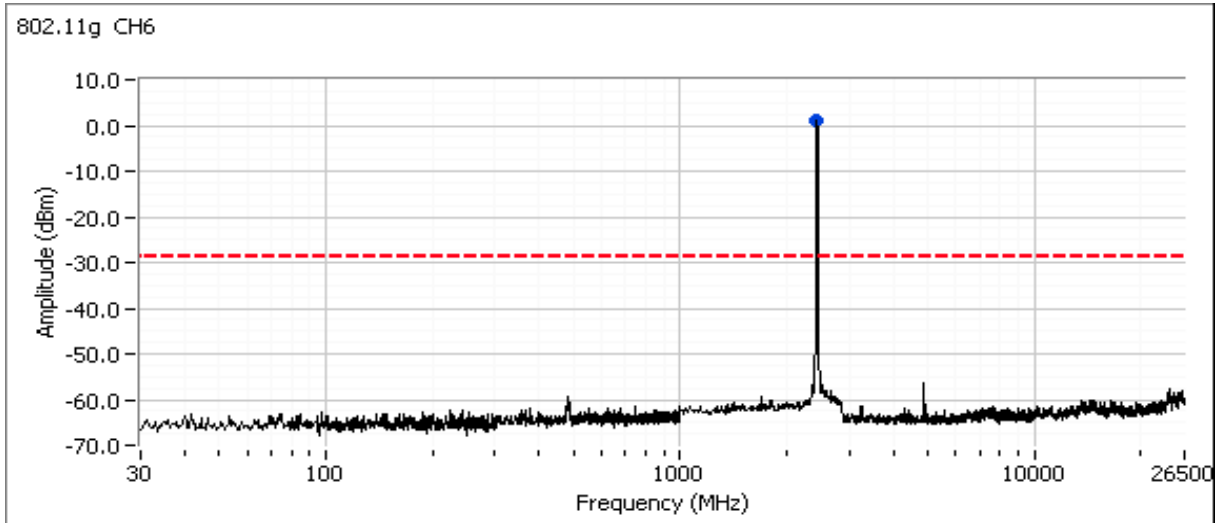

Plots for high channel, power setting = default

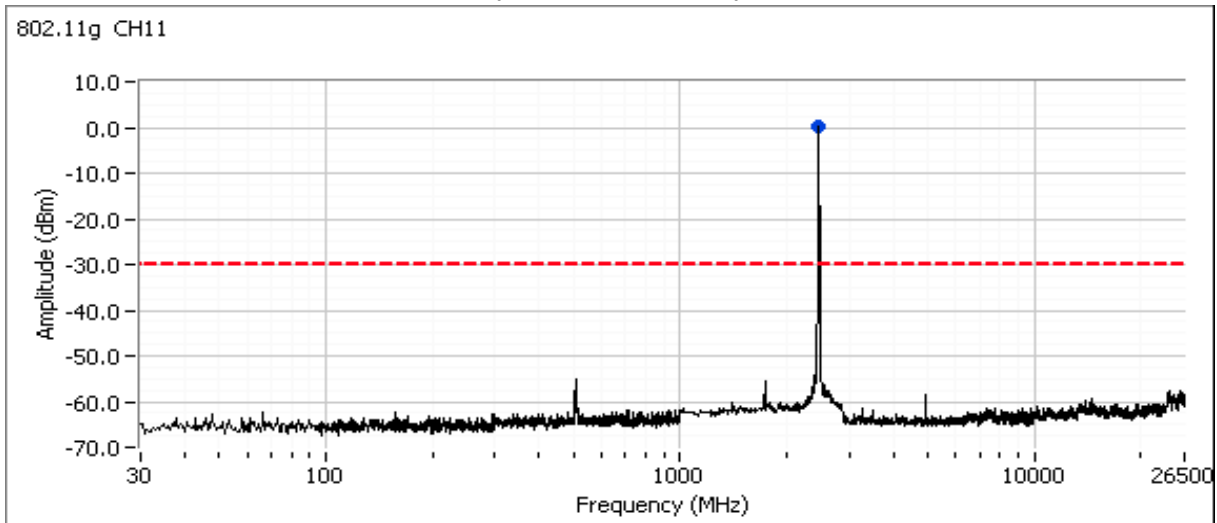

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

**RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements
Power, PSD, Bandwidth and Spurious Emissions (802.11n20 Mode)**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 8/23/2011	Config. Used: 2
Test Engineer: John Caizzi / Rafael Varelas	Config Change: no antennas
Test Location: FT4 and Lab #4	EUT Voltage: 3.3 VDC

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 23 °C
Rel. Humidity: 37 %

Summary of Results

Run #	Pwr setting	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	Output Power	15.247(b)	Pass	9.5 dBm
2	-	Power spectral Density (PSD)	15.247(d)	Pass	-14.4 dBm/3kHz
3	-	Minimum 6dB Bandwidth	15.247(a)	Pass	15.1 MHz
3	-	99% Bandwidth	RSS GEN	-	17.9 MHz
4	-	Spurious emissions	15.247(b)	Pass	All emissions < -30 dBc

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A


Run #1: Output Power

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP ^{Note 2}		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
-	2412	7.9	6.2	3.0	Pass	10.9	0.012	15.0	31.6
-	2437	8.9	7.8	3.0	Pass	11.9	0.015	15.6	36.3
-	2462	9.5	8.9	3.0	Pass	12.5	0.018	17.4	55.0

Note 1: Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was not continuous but the PSA analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.

Note 2: Power setting - the software power setting used during testing, included for reference only.

Note 3: Power measured with a peak power meter for reference purposes only @ 100%.

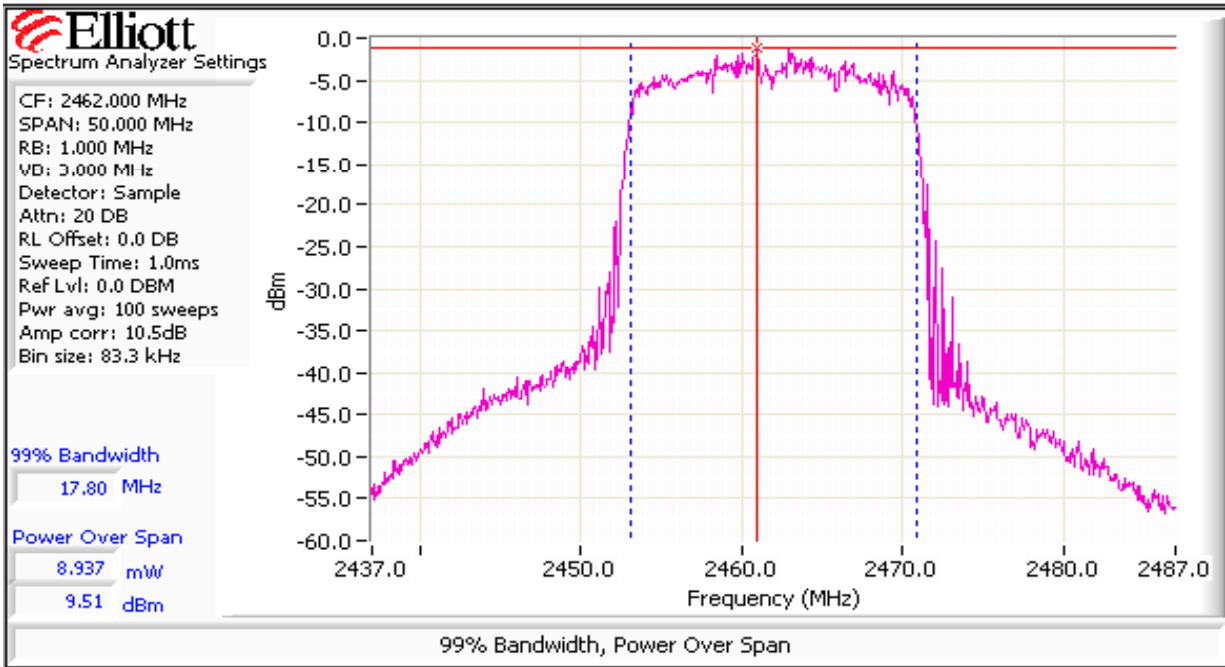


Client: Summit Data Communications	Job Number: J78403
Model: SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number: T80878
	Account Manager: Christine Krebill
Contact: Ron Seide	
Standard: FCC 15.247/RSS-210	Class: N/A

Run #2: Power spectral Density


Power Setting	Frequency (MHz)	PSD	Limit dBm/3kHz	Result
		(dBm/3kHz) ^{Note 1}		
-	2411.651	-14.5	8.0	Pass
-	2436.6503	-14.6	8.0	Pass
-	2461.6495	-14.4	8.0	Pass


Note 1: Power spectral density measured using RB=3 kHz, VB=10kHz, analyzer with peak detector and with a sweep time set to ensure a dwell time of at least 1 second per 3kHz. The measurement is made at the frequency of PPSD determined from preliminary scans using RB=3kHz using multiple sweeps at a faster rate over the 6dB bandwidth of the signal.

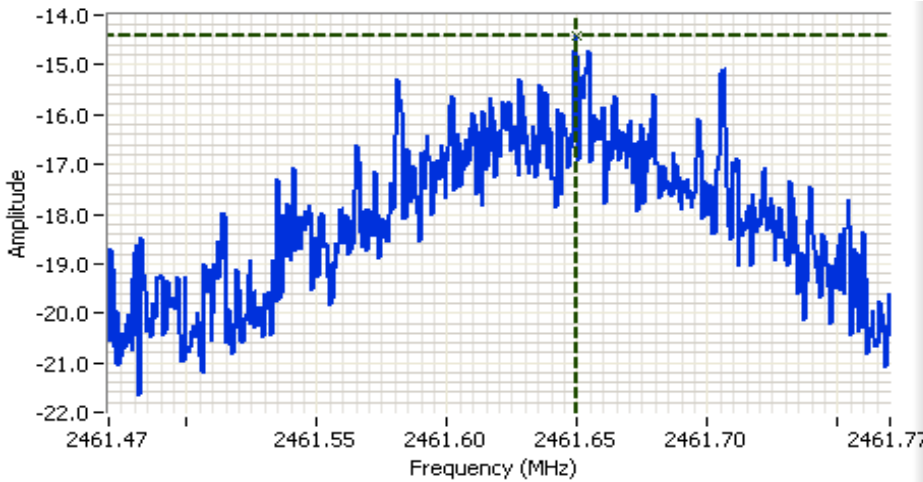

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2461.620 MHz
 SPAN: 300 kHz
 RB: 3.00 kHz
 VB: 10.0 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 100.0s
 Ref Lvl: -6.5 DBM

Comments
 PSD = -14.4 dBm/3kHz
 802.11n20

Cursor 1 2461.6495 -14.40 

0.0000 0.00 



Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #3: Signal Bandwidth

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			6dB	99%
-	2412	100kHz	15.4	17.8
-	2437	100kHz	15.1	17.9
-	2462	100kHz	15.1	17.8

Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB



Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 50.000 MHz
 RB: 100 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 0.0 DB
 Sweep Time: 6.0ms
 Ref Lvl: -11.0 DBM

Comments
 6dB BW: 15.083 MHz
 802.11n20

Cursor 1	2444.5000	-11.50	Delta Freq.	15.083
Cursor 2	2429.4167	-17.50	Delta Amplitude	6.00




Run #4: Out of Band Spurious Emissions


Frequency (MHz)	Limit	Result
2412	-30dBc	Pass
2437	-30dBc	Pass
2462	-30dBc	Pass

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Plots for low channel, power setting = default

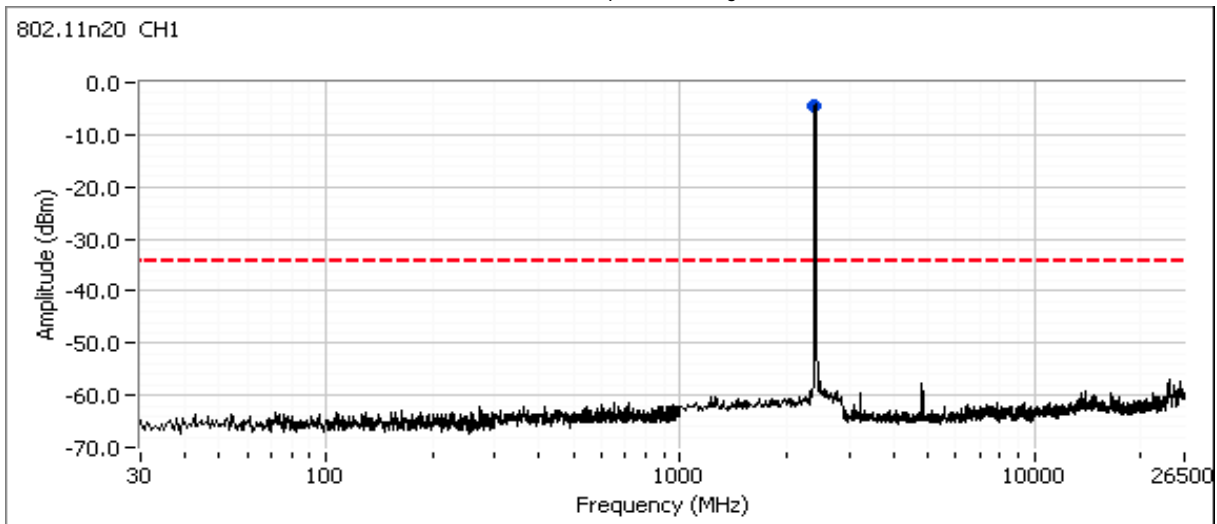


Additional plot showing compliance with -30dBc limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

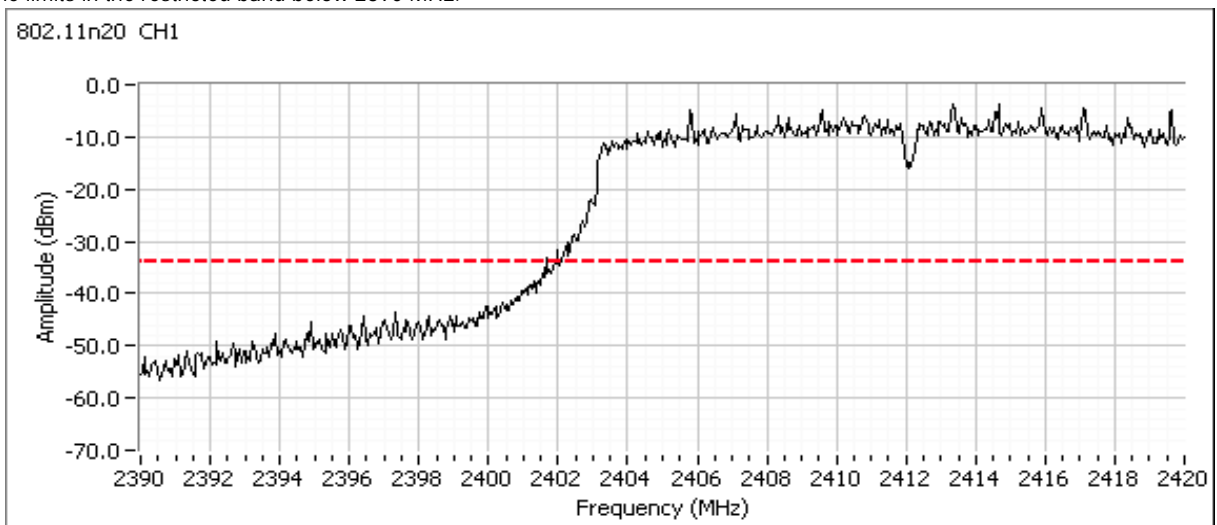


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Plots for center channel, power setting = default

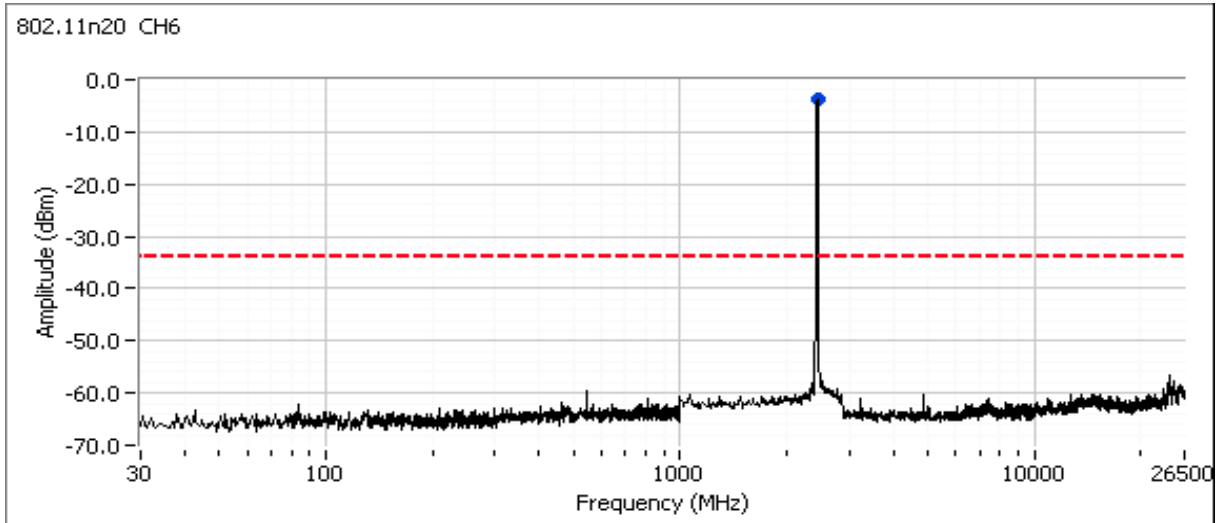

Plots for high channel, power setting = default

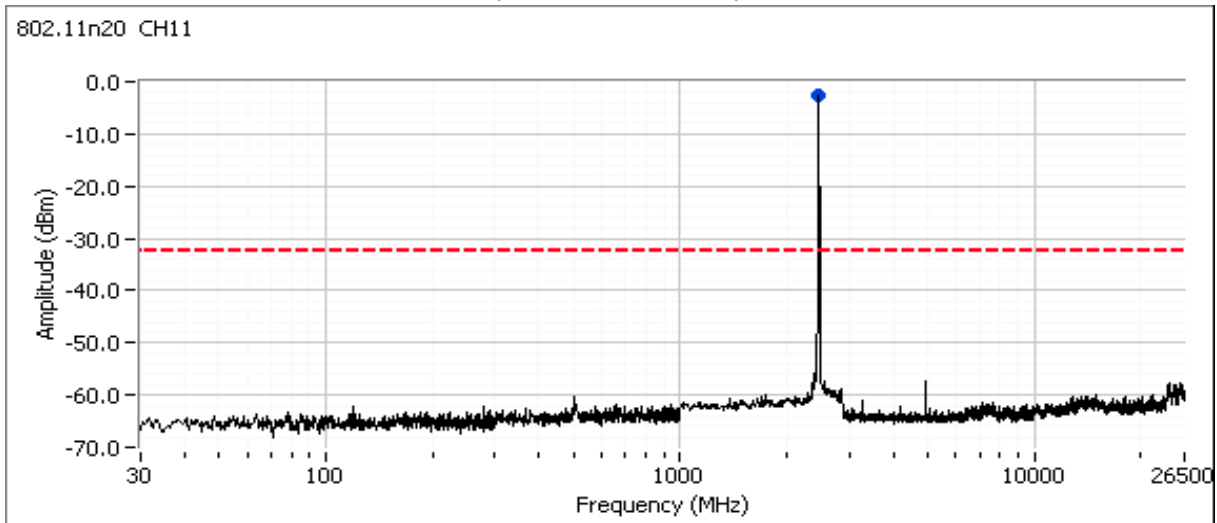

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

**RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements
Power, PSD, Bandwidth and Spurious Emissions (802.11a)**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 11/3/2011
 Test Engineer: Joseph Cadigal
 Test Location: FT Chamber#4

Config. Used: 2
 Config Change: none
 EUT Voltage: 3.3Vdc

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 23 °C
 Rel. Humidity: 37 %

Summary of Results

Run #	Pwr setting	Test Performed	Limit	Pass / Fail	Result / Margin
1	default	Output Power	15.247(b)	Pass	7.9 dBm
2	default	Power spectral Density (PSD)	15.247(d)	Pass	-11.8dBm/3kHz
3	default	Minimum 6dB Bandwidth	15.247(a)	Pass	15.0 MHz
3	default	99% Bandwidth	RSS GEN	-	16.9MHz
4	default	Spurious emissions	15.247(b)	Pass	All emissions < -30 dBc

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard


No deviations were made from the requirements of the standard.

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1: Output Power

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP ^{Note 2}		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
-	5745	7.8	6.0	6.5	Pass	14.3	0.027	15.5	35.5
-	5785	7.9	6.2	6.5	Pass	14.4	0.028	15.2	33.1
-	5805	7.8	6.0	6.5	Pass	14.3	0.027	15.0	31.6

- Note 1: Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was not continuous but the PSA analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
- Note 2: Power setting - the software power setting used during testing, included for reference only.
- Note 3: Power measured with a peak power meter for reference purposes only.

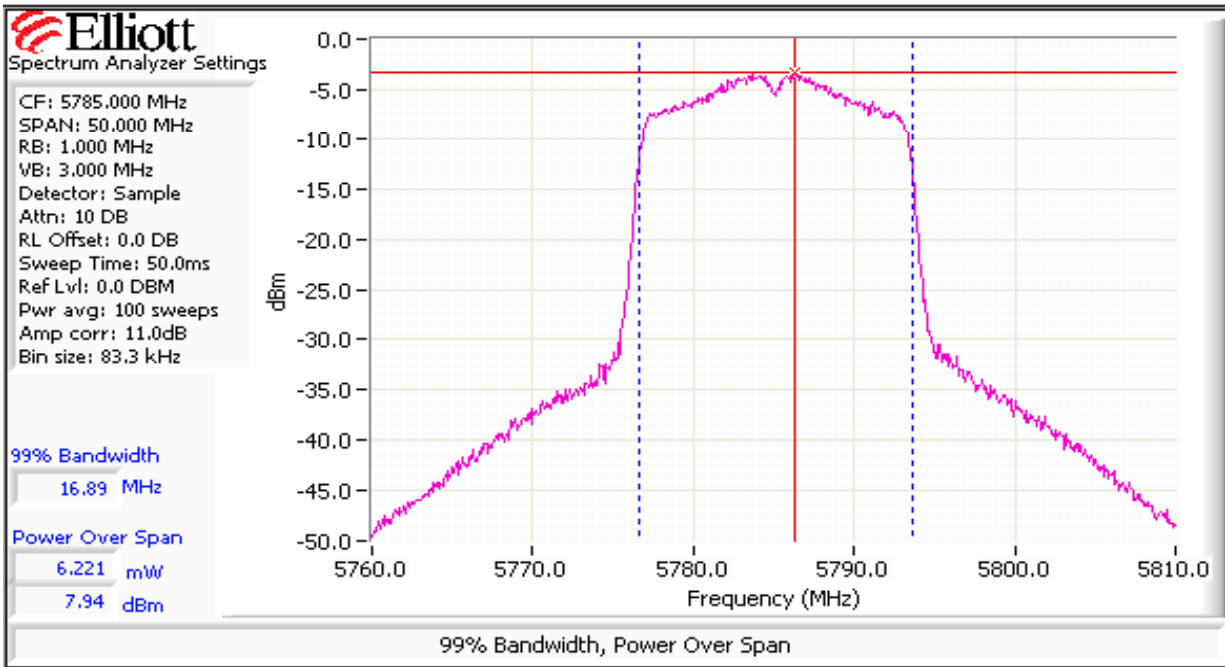


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #2: Power spectral Density


Power Setting	Frequency (MHz)	PSD	Limit dBm/3kHz	Result
		(dBm/3kHz) ^{Note 1}		
-	5745.149	-11.8	8.0	Pass
-	5785.144	-16.7	8.0	Pass
-	5803.0112	-14.5	8.0	Pass


Note 1: Power spectral density measured using RB=3 kHz, VB=10kHz, analyzer with peak detector and with a sweep time set to ensure a dwell time of at least 1 second per 3kHz. The measurement is made at the frequency of PPSD determined from preliminary scans using RB=3kHz using multiple sweeps at a faster rate over the 6dB bandwidth of the signal.

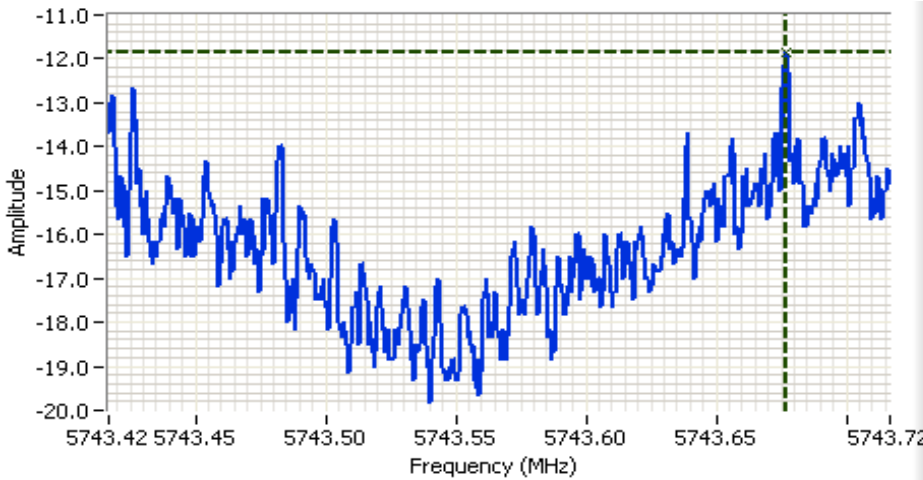

Analyzer Settings
 HP8564E,EMICF: 5743.567 MHz
 SPAN: 300 kHz
 RB: 3.00 kHz
 VB: 10.0 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.0 DB
 Sweep Time: 100.0s
 Ref Lvl: 11.0 DBM

Comments
 PSD = -11.83dBm/3kHz
 802.11a

Cursor 1 5743.6772 -11.83 

0.0000 0.00 



Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #3: Signal Bandwidth

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			6dB	99%
-	5745	100kHz	15.1	16.9
-	5785	100kHz	15.0	16.9
-	5805	100kHz	15.1	16.9

Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB



Analyzer Settings
 Agilent Technologies, E4446A
 CF: 5785.000 MHz
 SPAN: 50.000 MHz
 RB: 100 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 0.0 DB
 Sweep Time: 6.0ms
 Ref Lvl: -12.0 DBM

Comments
 6dB BW: 15.000 MHz
 802.11a

Cursor 1 5792.5000 -12.66  Delta Freq. 15.000
 Cursor 2 5777.5000 -18.66  Delta Amplitude 6.00




Run #4: Out of Band Spurious Emissions


Frequency (MHz)	Limit	Result
5745	-30dBc	Pass
5785	-30dBc	Pass
5805	-30dBc	Pass

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Plots for low channel, power setting(s) = default

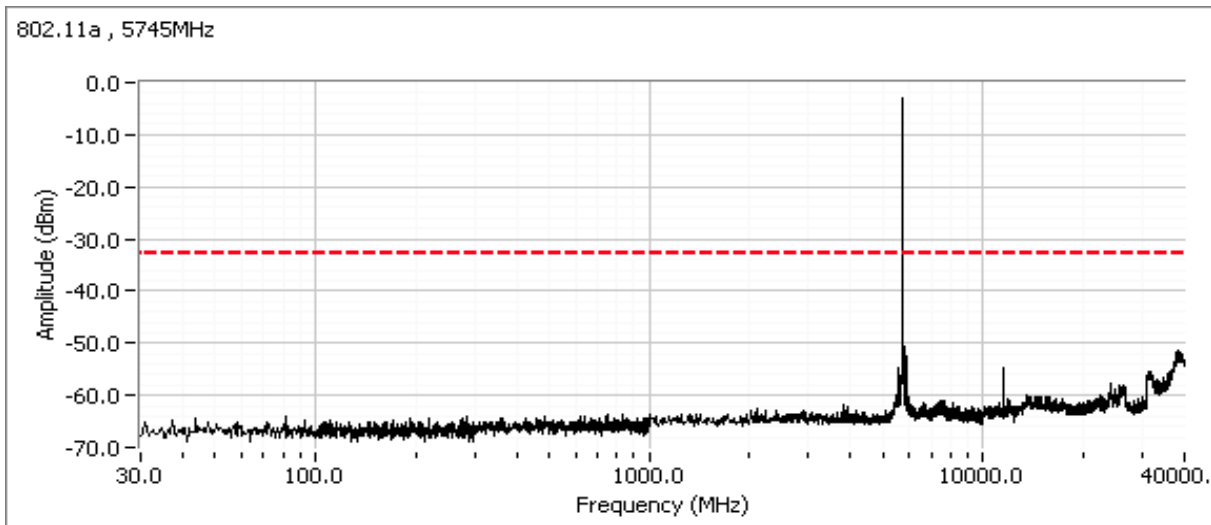


Additional plot from 5715 - 5755 MHz showing compliance with -30dBc at the band edge.

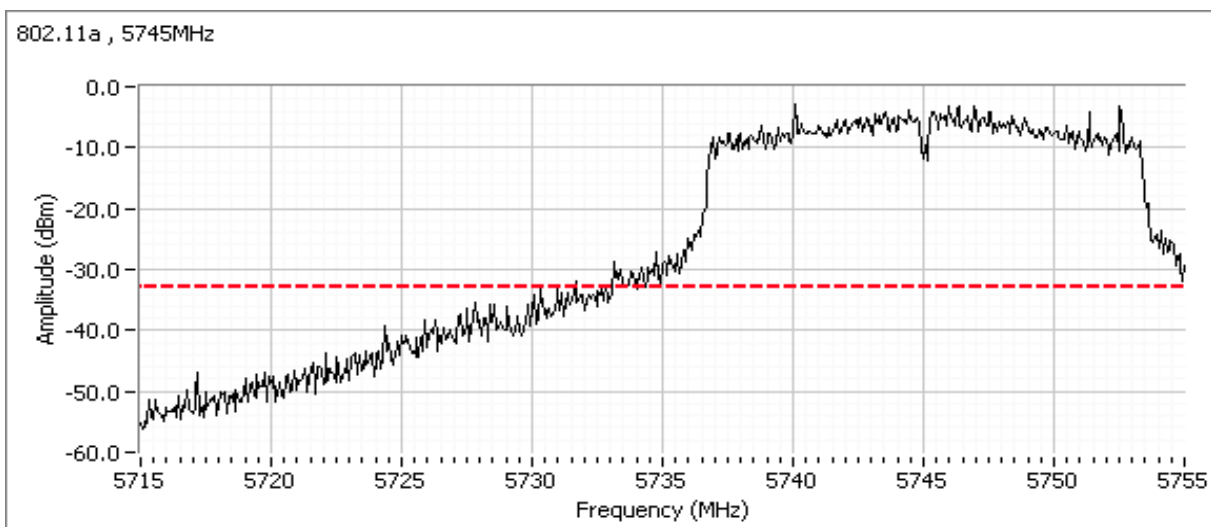


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Plots for center channel, power setting(s) = default

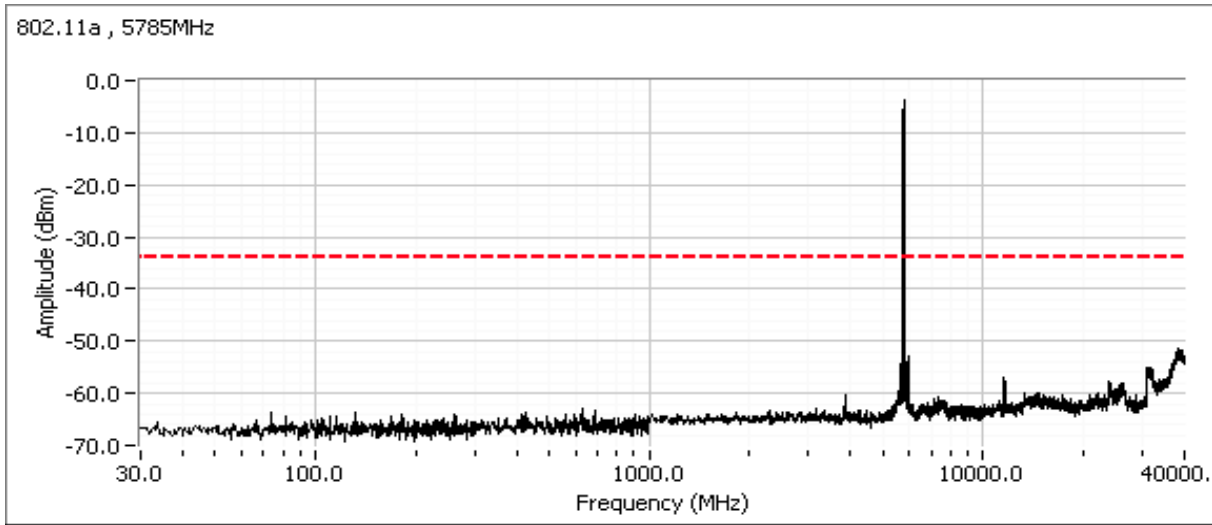


Plots for high channel, power setting(s) = default

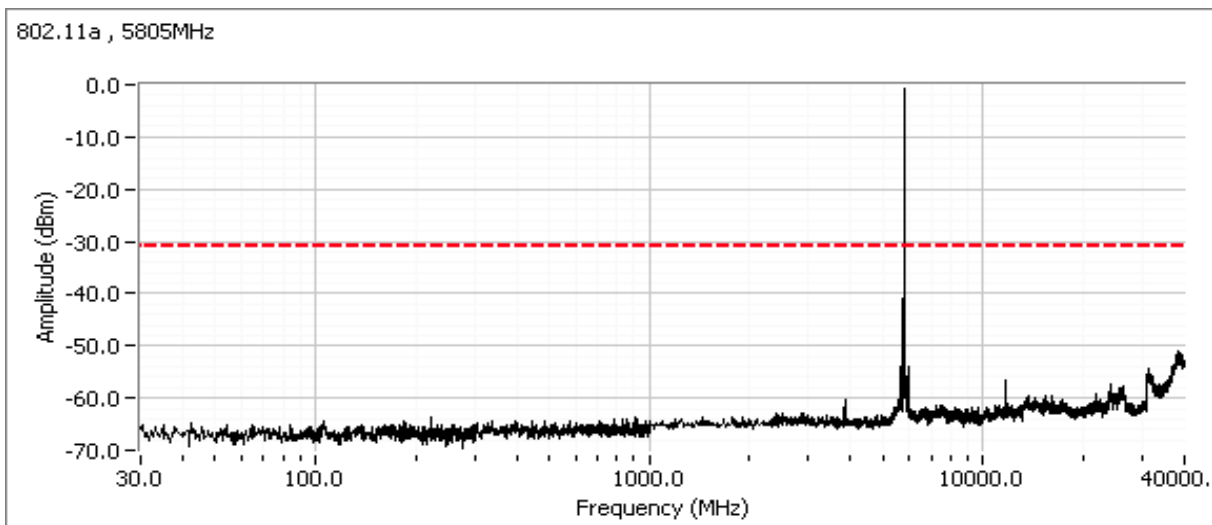

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

Additional plot from 5820 - 5860 MHz showing compliance with -30dBc at the band edge.

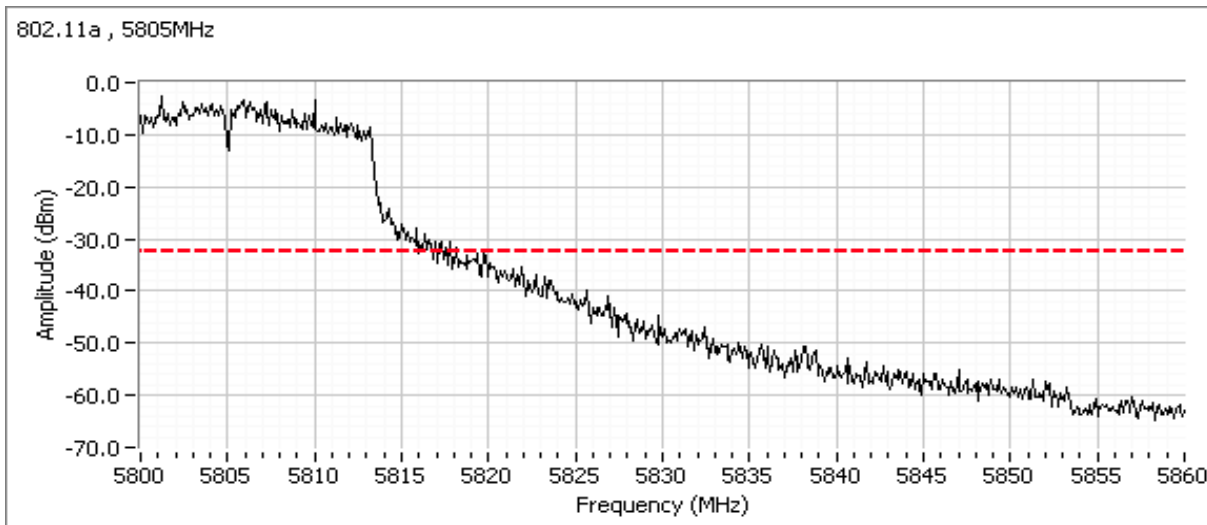

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	FCC 15.247/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements
Power, PSD, Bandwidth and Spurious Emissions (802.11n20 - 5GHz)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 11/3/2011 & 11/4/11	Config. Used: 2
Test Engineer: Joseph Cadigal & John Caizzi	Config Change: none
Test Location: FT Chamber#4	EUT Voltage: 3.3Vdc

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 24 °C
Rel. Humidity: 43 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	-		Output Power	15.247(b)	Pass	10.6 dBm
2			Power spectral Density (PSD)	15.247(d)	Pass	-10.3 dBm/3kHz
3			Minimum 6dB Bandwidth	15.247(a)	Pass	16.8 MHz
3			99% Bandwidth	RSS GEN	-	18.2
4			Spurious emissions	15.247(b)	Pass	All emissions < -30 dBc

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard


No deviations were made from the requirements of the standard.

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #1: Output Power

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP ^{Note 2}		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
-	5745	10.6	11.6	6.5	Pass	17.1	0.052	16.2	41.7
-	5785	10.3	10.8	6.5	Pass	16.8	0.048	15.7	37.2
-	5805	10.2	10.5	6.5	Pass	16.7	0.047	15.6	36.3

- Note 1: Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was not continuous but the ESI analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
- Note 2: Power setting - the software power setting used during testing, included for reference only.
- Note 3: Power measured using peak power meter and is included for reference only.

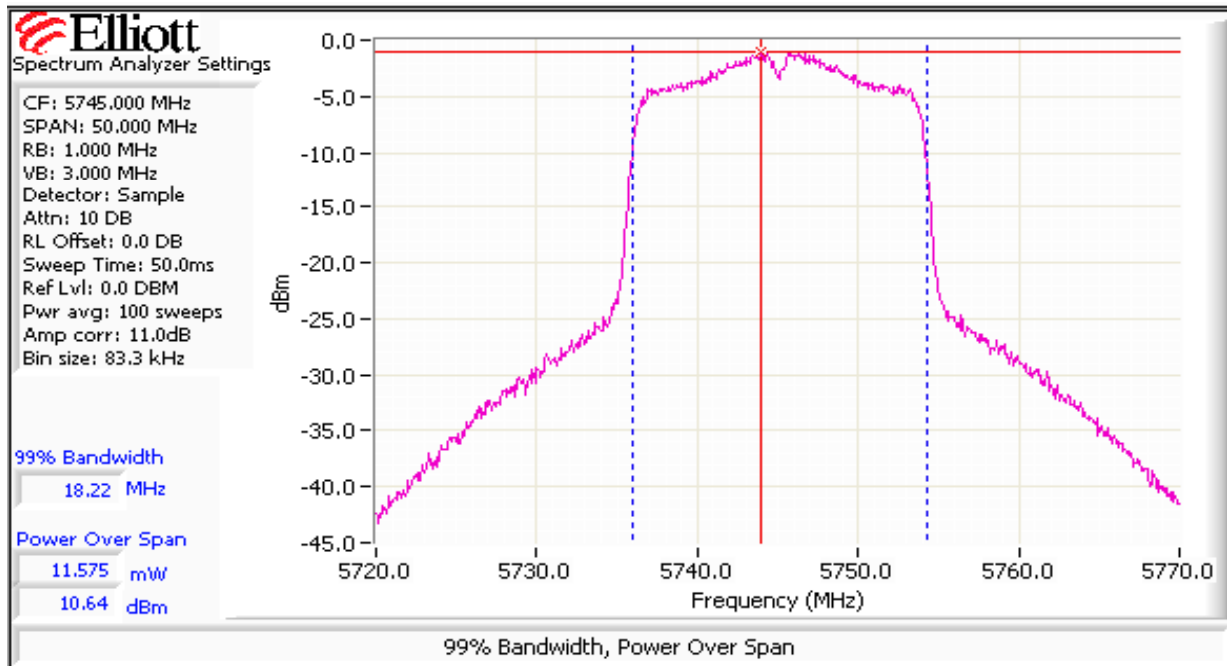


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #2: Power spectral Density

Power Setting	Frequency (MHz)	PSD	Limit dBm/3kHz	Result
		(dBm/3kHz) ^{Note 1}		
Default	5745	-10.3	8.0	Pass
	5785	-11.3	8.0	Pass
	5805	-11.2	8.0	Pass

Note 1: Power spectral density measured using RB=3 kHz, VB=10kHz, analyzer with peak detector and with a sweep time set to ensure a dwell time of at least 1 second per 3kHz. The measurement is made at the frequency of PPSD determined from preliminary scans using RB=3kHz using multiple sweeps at a faster rate over the 6dB bandwidth of the signal.

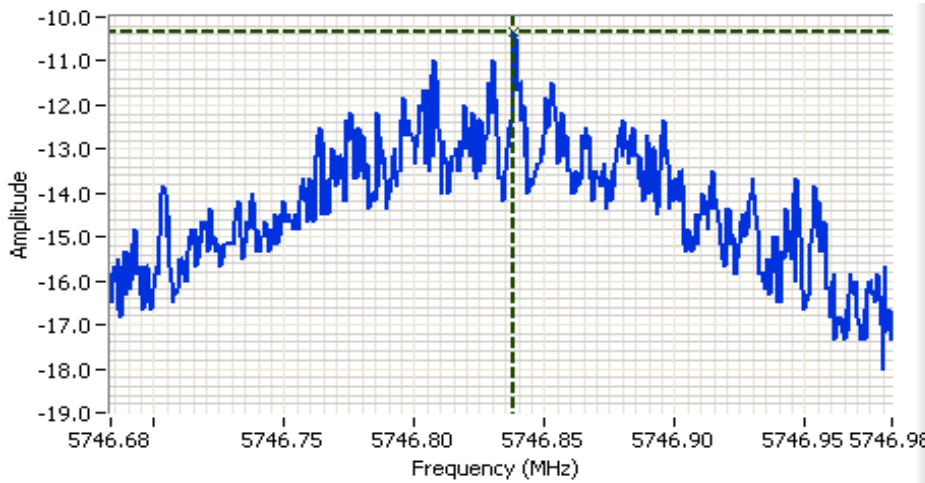

Analyzer Settings
 HP8564E,EMICF: 5746.833
 MHz
 SPAN: 300 kHz
 RB: 3.00 kHz
 VB: 10.0 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.0 DB
 Sweep Time: 100.0s
 Ref Lvl: 11.0 DBM

Comments
 PSD = -10.33dBm/3kHz
 802.11n20

Cursor 1	5746.8383	-10.33	↕	✱	🔒
	0.0000	0.00	↕		🔒




Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Run #3: Signal Bandwidth

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			6dB	99%
-	5745	100 kHz	16.8	18.2
	5785		17.5	18.2
	5805		17.6	18.2

Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB

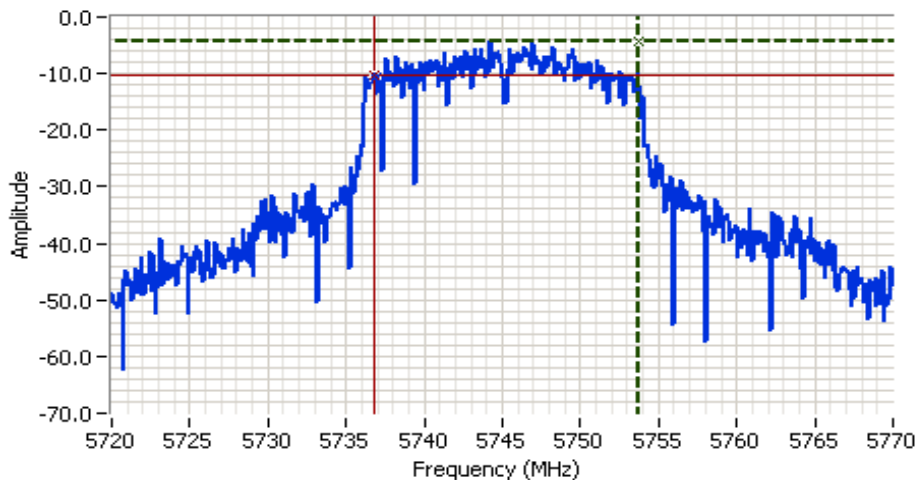

Analyzer Settings
 HP8564E,EMICF: 5745.000 MHz
 SPAN: 50.000 MHz
 RB: 100 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.0 DB
 Sweep Time: 50.0ms
 Ref Lvl: 10.0 DBM

Comments
 6dB BW: 16.833 MHz
 802.11n20

Cursor 1	5753.6667	-4.17	
Cursor 2	5736.8333	-10.17	

Delta Freq. 16.833
 Delta Amplitude 6.00




Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A


Run #4: Out of Band Spurious Emissions

Frequency (MHz)	Limit	Result
5745	-30dBc	Pass
5785	-30dBc	Pass
5805	-30dBc	Pass

Plot for low channel, power setting = default

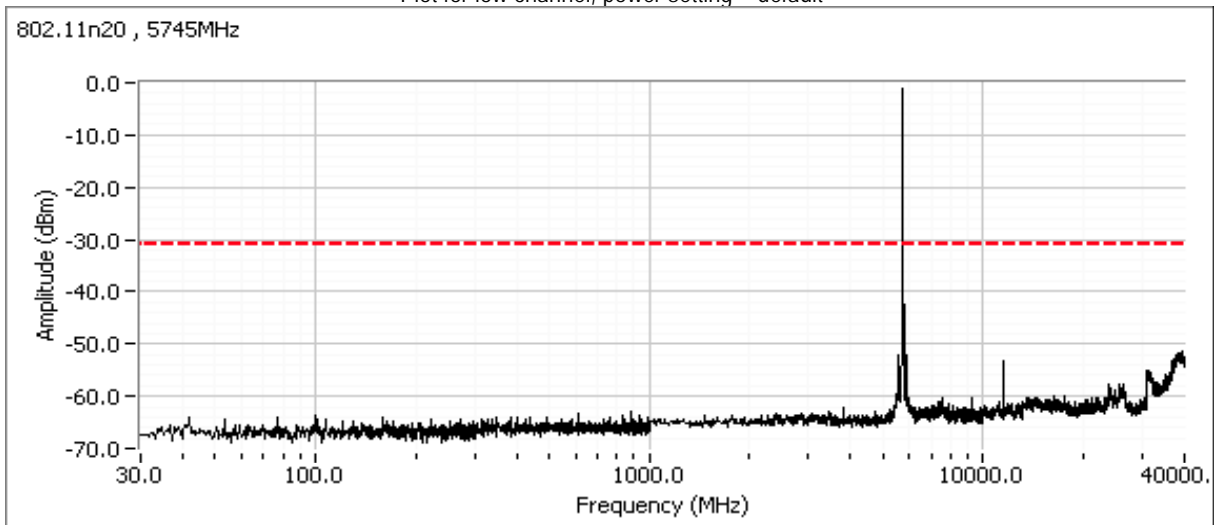


Additional plot from 5715 - 5755 MHz showing compliance with -30dBc at the band edge.

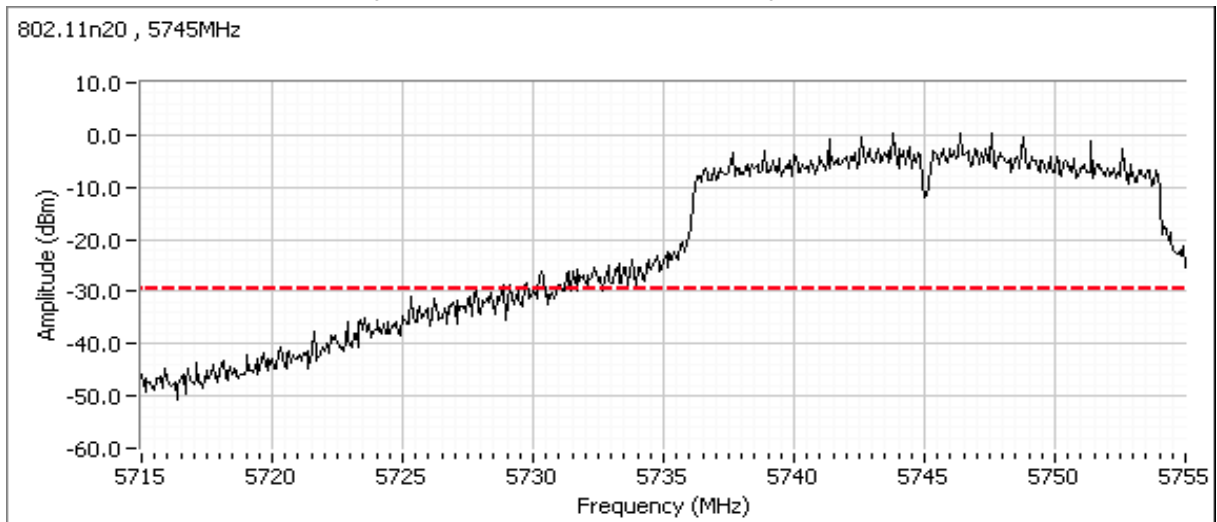


Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Plot for center channel, power setting = default

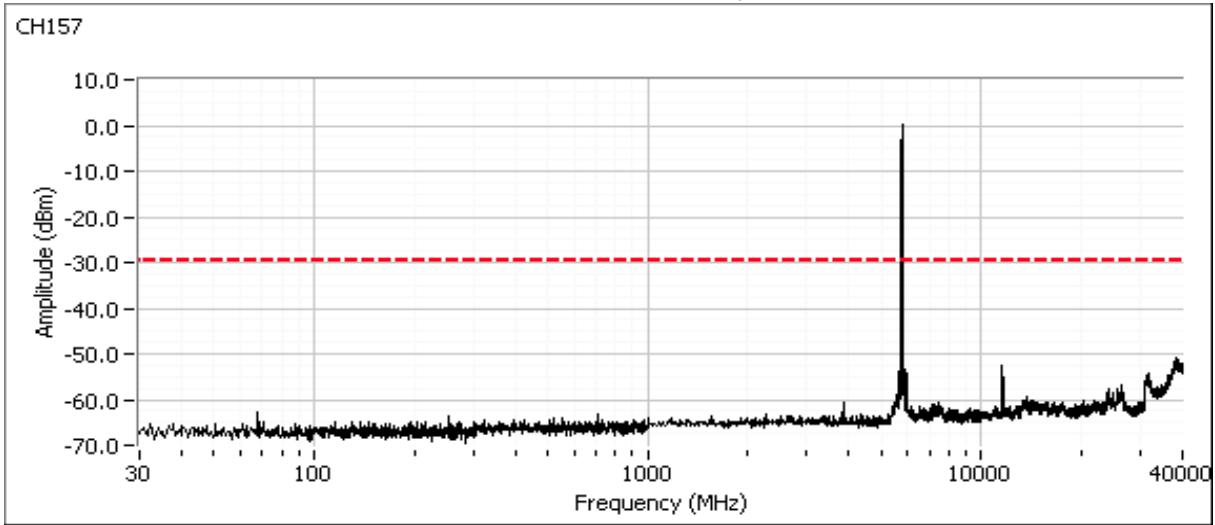


Plot for high channel, power setting = default

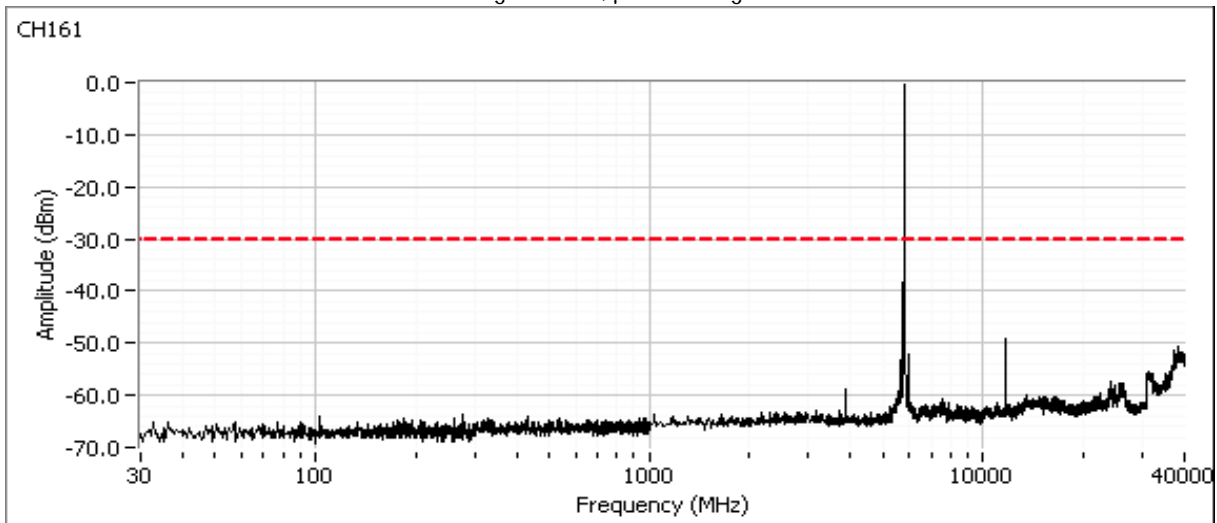

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 (1x1 802.11abg + BT 2.1)	T-Log Number:	T80878
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	FCC 15.247/RSS-210	Class:	N/A

Additional plot from 5820 - 5860 MHz showing compliance with -30dBc at the band edge.

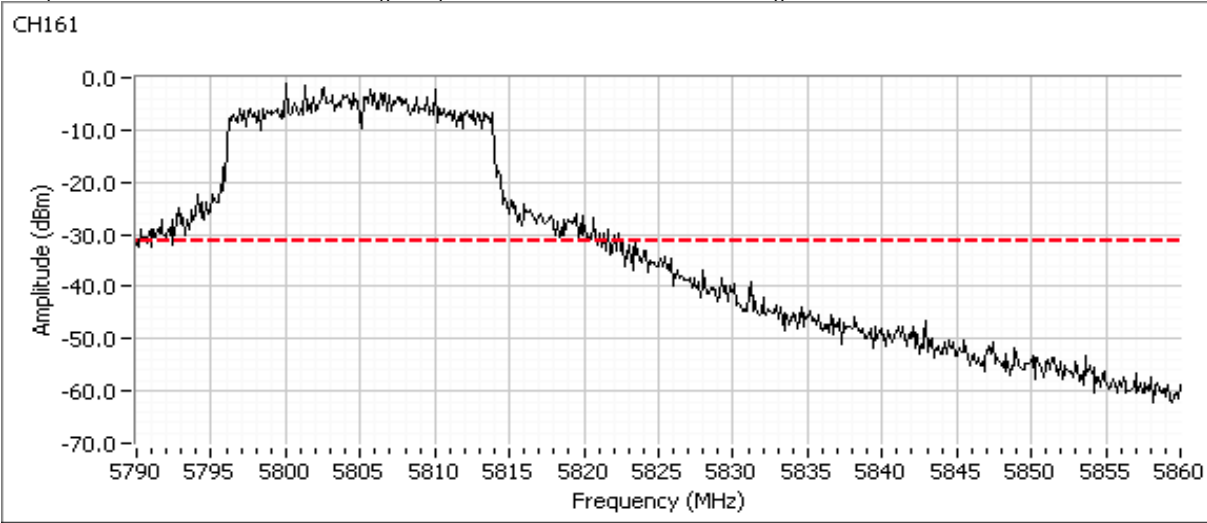

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 and SDC-MSD40NBT (1x1 802.11abg + BT 2.1)	T-Log Number:	T83198
Contact:	Ron Seide	Account Manager:	Christine Krebill
Emissions Standard(s):	EN 301 489-1 V1.8.1/ FCC Part 15B	Class:	B
Immunity Standard(s):	EN 301 489-1 V1.8.1	Environment:	-

EMC Test Data

For The

Summit Data Communications

Model

SDC-WB40 and SDC-MSD40NBT (1x1 802.11abg + BT 2.1)

Date of Last Test: 12/16/2011



EMC Test Data

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 and SDC-MSD40NBT (1x1 802.11abg + BT 2.1)	T-Log Number:	T83198
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	EN 301 489-1 V1.8.1/ FCC Part 15B	Class:	B

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 12/16/2011
Test Engineer: John Caizzi
Test Location: Fremont Chamber #5

Config. Used: 2
Config Change: none
Host Unit Voltage 120V / 60Hz & 230V / 50Hz

General Test Configuration

For tabletop equipment, the EUT host system was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. The EUT was transmitting on 2437 MHz, 802.11g, 6 Mbps.

Ambient Conditions: Temperature: 21 °C
 Rel. Humidity: 33 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 230V/50Hz	Class B	Pass	31.0dBµV @ 0.687MHz (-15.0dB)
2	CE, AC Power, 120V/60Hz	Class B	Pass	31.9dBµV @ 19.501MHz (-18.1dB)

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 and SDC-MSD40NBT (1x1 802.11abg + BT 2.1)	T-Log Number:	T83198
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	EN 301 489-1 V1.8.1/ FCC Part 15B	Class:	B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

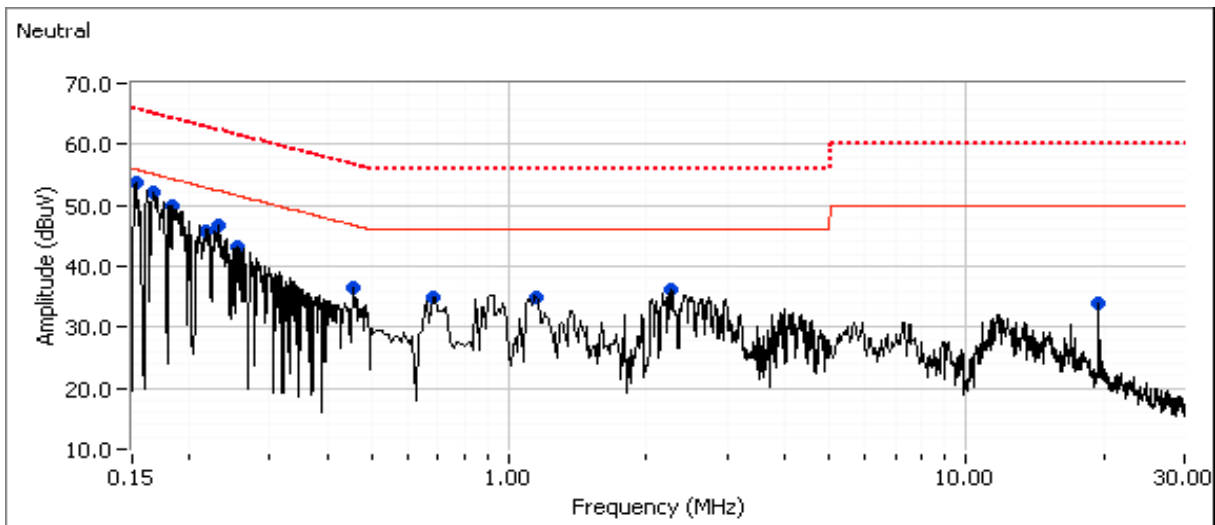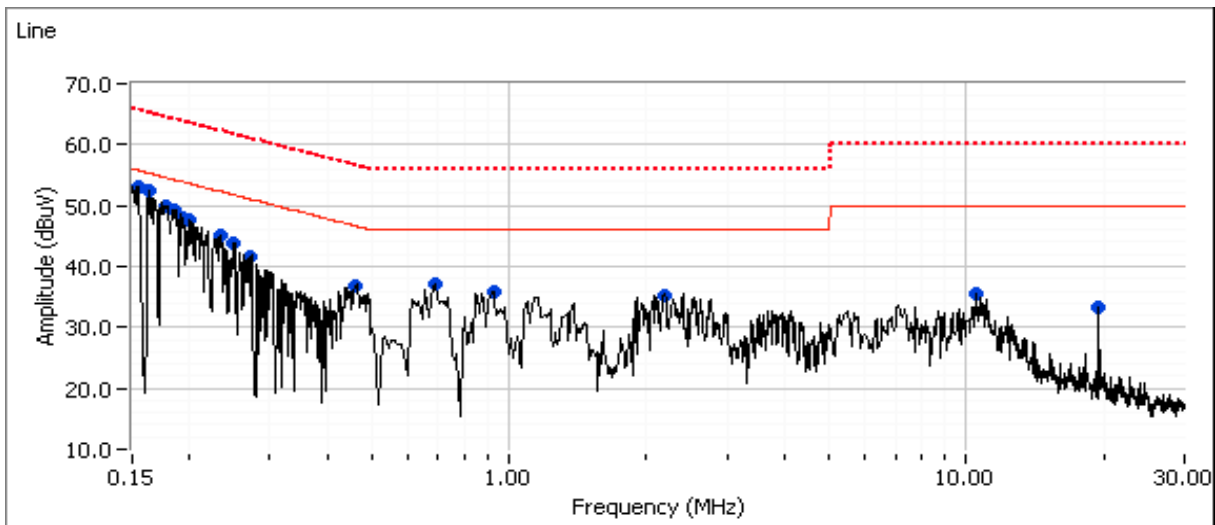



EMC Test Data

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 and SDC-MSD40NBT (1x1 802.11abg + BT 2.1)	T-Log Number:	T83198
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	EN 301 489-1 V1.8.1/ FCC Part 15B	Class:	B

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.153	53.0	Line	55.8	-2.8	Peak	
0.163	52.3	Line	55.3	-3.0	Peak	
0.178	49.8	Line	54.6	-4.8	Peak	
0.185	49.1	Line	54.3	-5.2	Peak	
0.195	48.1	Line	53.9	-5.8	Peak	
0.202	47.6	Line	53.6	-6.0	Peak	
0.234	45.1	Line	52.3	-7.2	Peak	
0.250	43.9	Line	51.7	-7.8	Peak	
0.687	37.0	Line	46.0	-9.0	Peak	
0.271	41.5	Line	51.1	-9.6	Peak	
0.464	36.9	Line	46.6	-9.7	Peak	
0.916	35.9	Line	46.0	-10.1	Peak	
2.173	35.2	Line	46.0	-10.8	Peak	
10.533	35.6	Line	50.0	-14.4	Peak	
19.501	33.3	Line	50.0	-16.7	Peak	
0.153	53.7	Neutral	55.8	-2.1	Peak	
0.167	52.1	Neutral	55.1	-3.0	Peak	
0.185	49.8	Neutral	54.3	-4.5	Peak	
0.232	46.7	Neutral	52.4	-5.7	Peak	
0.217	45.8	Neutral	52.9	-7.1	Peak	
0.255	43.2	Neutral	51.6	-8.4	Peak	
2.279	36.3	Neutral	46.0	-9.7	Peak	
0.458	36.6	Neutral	46.7	-10.1	Peak	
0.685	35.0	Neutral	46.0	-11.0	Peak	
1.141	34.8	Neutral	46.0	-11.2	Peak	
19.502	34.0	Neutral	50.0	-16.0	Peak	



EMC Test Data

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 and SDC-MSD40NBT (1x1 802.11abg + BT 2.1)	T-Log Number:	T83198
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	EN 301 489-1 V1.8.1/ FCC Part 15B	Class:	B

Final quasi-peak and average readings



Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.153	17.5	Line	55.8	-38.3	AVG	
0.153	46.1	Line	65.8	-19.7	QP	
0.163	16.8	Line	55.3	-38.5	AVG	
0.163	44.7	Line	65.3	-20.6	QP	
0.178	16.1	Line	54.6	-38.5	AVG	
0.178	42.8	Line	64.6	-21.8	QP	
0.185	15.9	Line	54.3	-38.4	AVG	
0.185	41.8	Line	64.3	-22.5	QP	
0.195	15.7	Line	53.8	-38.1	AVG	
0.195	40.8	Line	63.8	-23.0	QP	
0.202	15.4	Line	53.5	-38.1	AVG	
0.202	40.1	Line	63.5	-23.4	QP	
0.687	31.0	Line	46.0	-15.0	AVG	
0.687	36.5	Line	56.0	-19.5	QP	
0.463	25.5	Line	46.6	-21.1	AVG	
0.463	34.1	Line	56.6	-22.5	QP	
0.916	28.9	Line	46.0	-17.1	AVG	
0.916	34.9	Line	56.0	-21.1	QP	
2.173	7.9	Line	46.0	-38.1	AVG	
2.173	33.6	Line	56.0	-22.4	QP	
10.533	20.5	Line	50.0	-29.5	AVG	
10.533	30.6	Line	60.0	-29.4	QP	
19.501	31.1	Line	50.0	-18.9	AVG	
19.501	32.0	Line	60.0	-28.0	QP	
0.153	17.6	Neutral	55.8	-38.2	AVG	
0.153	46.2	Neutral	65.8	-19.6	QP	
0.167	16.5	Neutral	55.1	-38.6	AVG	
0.167	44.3	Neutral	65.1	-20.8	QP	
0.185	15.8	Neutral	54.3	-38.5	AVG	
0.185	42.1	Neutral	64.3	-22.2	QP	
0.232	21.4	Neutral	52.4	-31.0	AVG	
0.232	37.5	Neutral	62.4	-24.9	QP	
0.216	14.6	Neutral	53.0	-38.4	AVG	
0.216	39.2	Neutral	63.0	-23.8	QP	
2.279	25.1	Neutral	46.0	-20.9	AVG	
2.279	32.6	Neutral	56.0	-23.4	QP	
0.458	28.8	Neutral	46.7	-17.9	AVG	
0.458	33.8	Neutral	56.7	-22.9	QP	

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 and SDC-MSD40NBT (1x1 802.11abg + BT 2.1)	T-Log Number:	T83198
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	EN 301 489-1 V1.8.1/ FCC Part 15B	Class:	B

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.685	29.4	Neutral	46.0	-16.6	AVG	
0.685	34.8	Neutral	56.0	-21.2	QP	
1.141	27.7	Neutral	46.0	-18.3	AVG	
1.141	34.5	Neutral	56.0	-21.5	QP	
19.502	30.2	Neutral	50.0	-19.8	AVG	
19.502	31.3	Neutral	60.0	-28.7	QP	

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 and SDC-MSD40NBT (1x1 802.11abg + BT 2.1)	T-Log Number:	T83198
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	EN 301 489-1 V1.8.1/ FCC Part 15B	Class:	B

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

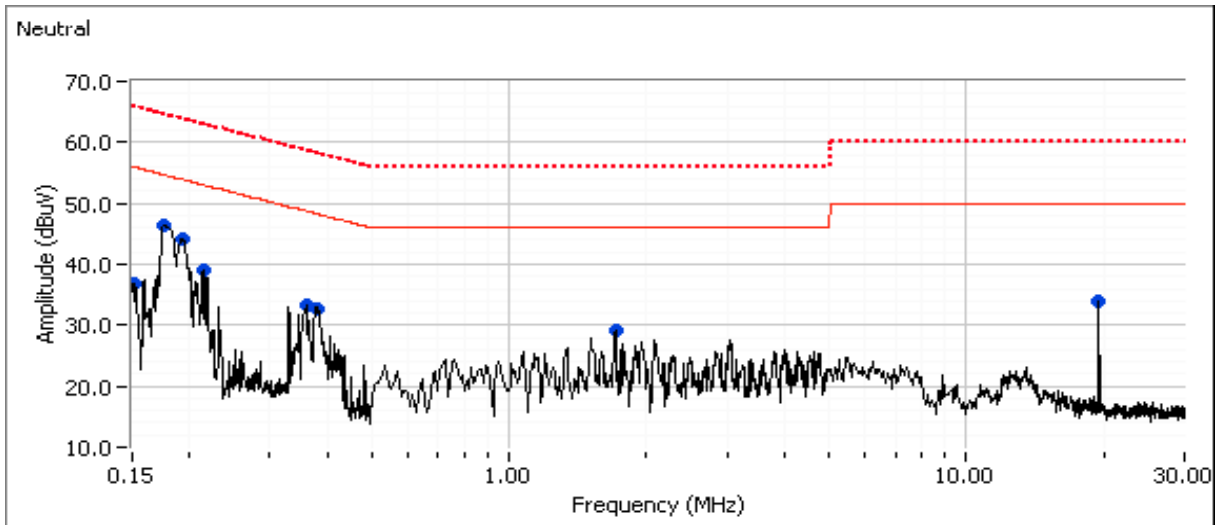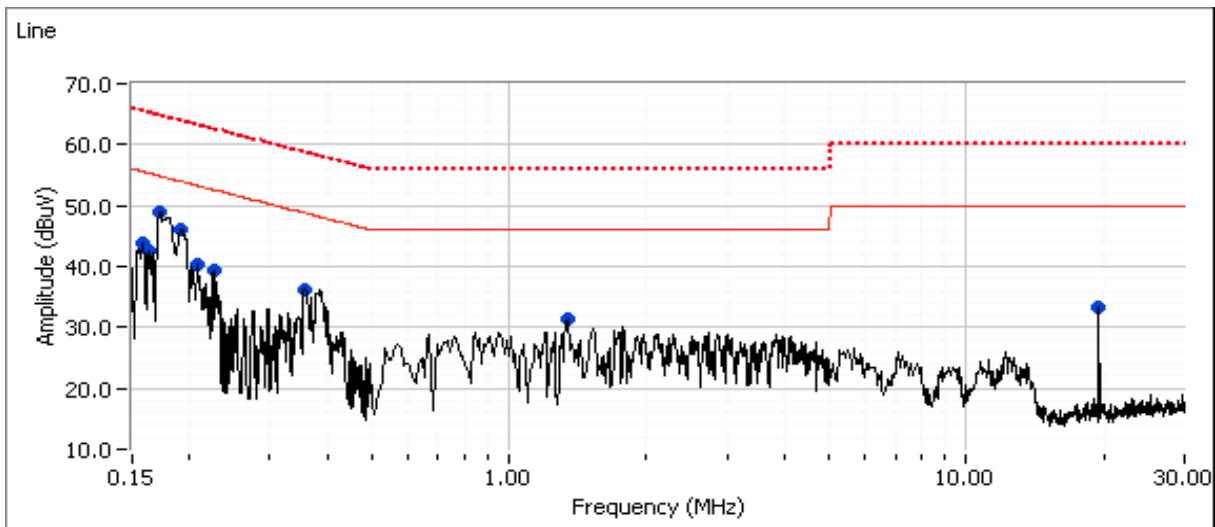



EMC Test Data

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 and SDC-MSD40NBT (1x1 802.11abg + BT 2.1)	T-Log Number:	T83198
		Account Manager:	Christine Krebill
Contact:	Ron Seide		
Standard:	EN 301 489-1 V1.8.1/ FCC Part 15B	Class:	B

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.173	48.8	Line	54.8	-6.0	Peak	
0.190	46.2	Line	53.9	-7.7	Peak	
0.158	43.8	Line	55.5	-11.7	Peak	
0.357	36.3	Line	48.8	-12.5	Peak	
0.164	42.5	Line	55.3	-12.8	Peak	
0.208	40.4	Line	53.3	-12.9	Peak	
0.225	39.3	Line	52.6	-13.3	Peak	
1.337	31.4	Line	46.0	-14.6	Peak	
19.502	33.2	Line	50.0	-16.8	Peak	
0.176	46.4	Neutral	54.7	-8.3	Peak	
0.192	44.0	Neutral	53.9	-9.9	Peak	
0.213	39.1	Neutral	53.0	-13.9	Peak	
0.379	32.8	Neutral	48.3	-15.5	Peak	
0.360	33.2	Neutral	48.7	-15.5	Peak	
19.501	34.0	Neutral	50.0	-16.0	Peak	
1.717	29.2	Neutral	46.0	-16.8	Peak	
0.152	36.9	Neutral	55.9	-19.0	Peak	

Client:	Summit Data Communications	Job Number:	J78403
Model:	SDC-WB40 and SDC-MSD40NBT (1x1 802.11abg + BT 2.1)	T-Log Number:	T83198
Contact:	Ron Seide	Account Manager:	Christine Krebill
Standard:	EN 301 489-1 V1.8.1/ FCC Part 15B	Class:	B

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.173	14.0	Line	54.8	-40.8	AVG	
0.173	44.3	Line	64.8	-20.5	QP	
0.190	33.5	Line	54.0	-20.5	AVG	
0.190	44.4	Line	64.0	-19.6	QP	
0.158	12.7	Line	55.6	-42.9	AVG	
0.158	31.5	Line	65.6	-34.1	QP	
0.357	10.7	Line	48.8	-38.1	AVG	
0.357	32.2	Line	58.8	-26.6	QP	
0.164	14.3	Line	55.3	-41.0	AVG	
0.164	41.0	Line	65.3	-24.3	QP	
0.208	16.0	Line	53.3	-37.3	AVG	
0.208	34.6	Line	63.3	-28.7	QP	
0.225	11.7	Line	52.6	-40.9	AVG	
0.225	23.9	Line	62.6	-38.7	QP	
1.337	21.3	Line	46.0	-24.7	AVG	
1.337	29.5	Line	56.0	-26.5	QP	
19.502	29.8	Line	50.0	-20.2	AVG	
19.502	30.4	Line	60.0	-29.6	QP	
0.176	16.4	Neutral	54.7	-38.3	AVG	
0.176	44.4	Neutral	64.7	-20.3	QP	
0.192	27.9	Neutral	53.9	-26.0	AVG	
0.192	42.6	Neutral	63.9	-21.3	QP	
0.213	12.2	Neutral	53.1	-40.9	AVG	
0.213	33.1	Neutral	63.1	-30.0	QP	
0.379	23.7	Neutral	48.3	-24.6	AVG	
0.379	30.7	Neutral	58.3	-27.6	QP	
0.360	17.3	Neutral	48.7	-31.4	AVG	
0.360	29.3	Neutral	58.7	-29.4	QP	
19.501	31.9	Neutral	50.0	-18.1	AVG	
19.501	32.6	Neutral	60.0	-27.4	QP	
1.717	10.7	Neutral	46.0	-35.3	AVG	
1.717	18.8	Neutral	56.0	-37.2	QP	
0.152	11.4	Neutral	55.9	-44.5	AVG	
0.152	30.6	Neutral	65.9	-35.3	QP	

End of Report

This page is intentionally blank and marks the last page of this test report.