



FCC TEST REPORT

Part 15 Subpart C

FCC ID: **TWNDR900-FCT**

Report Reference No.....: **WE10010002**

Compiled by

(position+printed name+signature)..
File administrators Wenliang Li

Wenliang Li

Supervised by

(position+printed name+signature)..
Test Engineer Cary Li

Cary Li

Approved by

(position+printed name+signature)..
Manager Jimmy Li

J Jimmy Li

Date of issue.....: Jan 21, 2010

Testing Laboratory Name: **Shenzhen Huatongwei International Inspection Co., Ltd**

Address.....: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name.....: **Pro-Lite, Inc.**

Address.....: 3505 Cadillac Ave. Building D

Manufacturer's name: **NINGBO YOUWON TECHNOLOGY ELECTRONICS CO., LTD**

Address.....: #928, XUEYUAN ROAD, LUGANG VILLAGE, GAOQIAO TOWN,
NINGBO

Test specification:

Standard: **FCC Part Subpart 15C 2008 – Intentional Radiators**

ANSI C63.4 - 2003

TRF Originator: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF.....: Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment Under Test : **Data Transceiver Module**

Trade Mark: /

Model/Type reference.....: DTR900-FC

Listed Models: /

Result.....: **Complied**

TEST REPORT

Test Report No. :	WE10010002	Jan 21, 2010
		Date of issue

Equipment under Test : Data Transceiver Module

Model /Type : DTR900-FC

Listed Models : /

Applicant : Pro-Lite, Inc.

Address : 3505 Cadillac Ave. Building D

Manufacturer : NINGBO YOUWON TECHNOLOGY ELECTRONICS CO., LTD

Address : #928, XUEYUAN ROAD, LUGANG VILLAGE, GAOQIAO TOWN, NINGBO

SUMMARY OF STANDARDS AND RUSELT

No.	Test Item	Test Standards and Procedure	Result
1	AC Conducted Emission	FCC Subpart 15C § 15.207	Complied
2	Radiated Emission	FCC Subpart 15C § 15.209 FCC Subpart 15C § 15.231(e) ANSI C63.4-2003 section 13.1.4	Complied
3	Deactivation Time	FCC Subpart 15C § 15.231(e)	Complied
4	20dB Bandwidth	FCC Subpart 15C § 15.231(c) ANSI C63.4-2003 section 13.1.7	Complied
5	Antenna Requirement	FCC Subpart 15C § 15.203	Complied

NOTE: 1),The detailed test result please see section 4.

2),The test report merely corresponds to the test sample.

3),It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test Power Supply	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	Configuration of Tested System	6
2.6.	Related Submittal(s) / Grant (s)	6
2.7.	Modifications	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	8
3.4.	Statement of the measurement uncertainty	8
3.5.	Equipments Used during the Test	9
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
4.1.	AC Conducted Emission	10
4.2.	Radiated Emission	13
4.3.	Deactivation Time	20
4.4.	20dB Bandwidth	22
4.5.	Antenna Requirement	24
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>25</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>26</u>

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15 Subpart C (2008) – Intentional Radiators

ANSI C63.4 (2003) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Jan 13, 2010

Testing commenced on : Jan 14, 2010

Testing concluded on : Jan 21, 2010

2.2. Equipment Under Test Power Supply

Power supply voltage : 120V / 60 Hz 115V / 60Hz
 12 V DC 24 V DC
 Other (specified in blank below)

DC 5V from PC(USB port)

2.3. Short description of the Equipment under Test (EUT)

Product Name : Data Transceiver Module

Model Number : DTR900-FC

Operation Frequency : 433.92MHz

Modulation Technology : FSK

Transmitter Type : Periodic Transmitter


Sample Type : Prototype

For more details, refer to the user's manual.

2.4. EUT operation mode

The EUT has been tested under typical operating mode(TX mode).

2.5. Configuration of Tested System

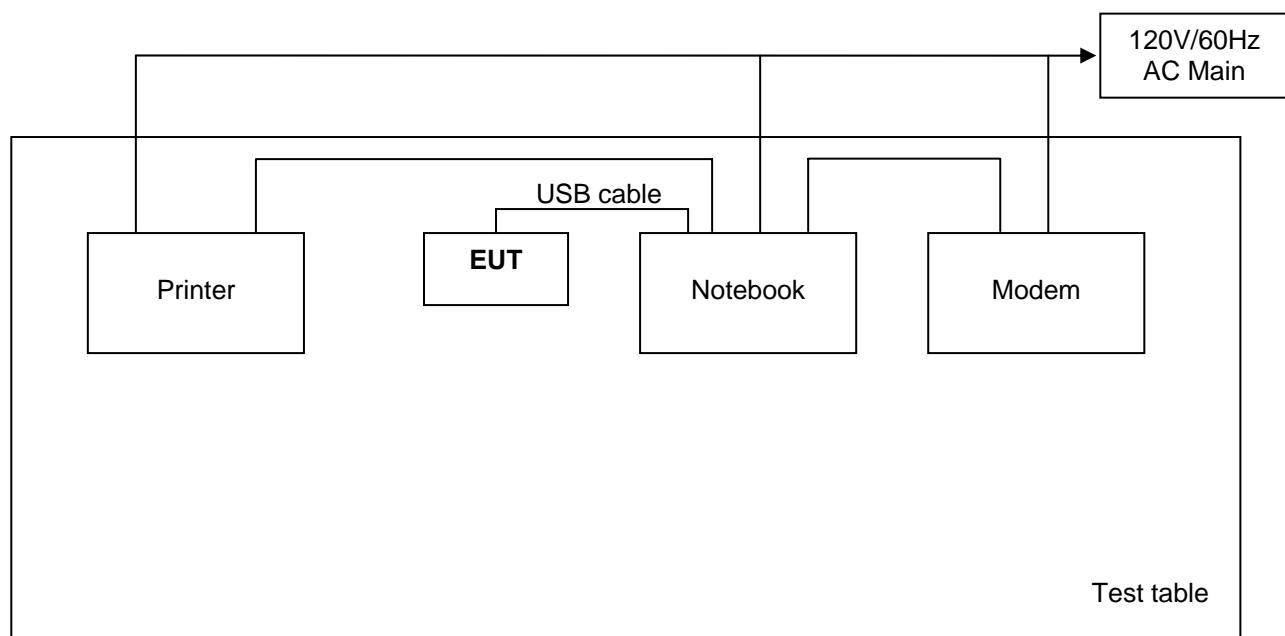

Equipment Used in Tested System

No.	Equipment	Manufacturer	Model No.	Serial No.
1	Notebook	AUSU	I9100L	59NP009727
2	Printer	HP	Laserjet 1000 series	/
3	Modem	D-Link	DSL-300	/

Note: For actual sample please see test setup photos and EUT external photos.

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **TWNDR900-FCT** filing to comply with the FCC Part 15 Subpart C 15.231(e) Rules 2008.

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: August 02, 2007. Valid time is until March 29, 2012.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is from Aug 24, 2005 to Sept 30, 2009.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date September, 2009.

IC-Registration No.: 5377

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377 on November 28th, 2005.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025:2005 or equivalent. The laboratory also fulfills the conditions described in Nemko Document NLA-10, the Authorization is valid through April 25, 2009.

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

DNV

Shenzhen Huatongwei International Inspection Co Ltd has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025(2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until 09 July, 2010.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>22 ° C</u>
Humidity:	<u>65 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.22dB	(1)
Radiated Emission	1~12.75GHz	4.35dB	(1)
20dB Bandwidth	/	0.25dB	(1)
Deactivation Time	/	0.5ms	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Equipments Used during the Test

Conducted Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100106	2009/11
2	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	100028	2009/11
3	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100044	2009/11
4	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2009/11
5	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2009/11
6	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2009/11


Radiated Emissions					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2008/11
2	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2008/11
3	RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	2008/11
4	TURNTABLE	ETS	2088	2149	2008/11
5	ANTENNA MAST	ETS	2075	2346	2008/11
6	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	N/A	2008/11
7	HORN ANTENNA	ROHDE & SCHWARZ	HF906	N/A	2008/06/

20dB Bandwidth & Deactivation Time & Duty Cycle					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCI	100106	2008/11
2	RECEIVER ANTENNA	/	/	/	/

4. TEST CONDITIONS AND RESULTS

4.1. AC Conducted Emission

TEST CONFIGURATION

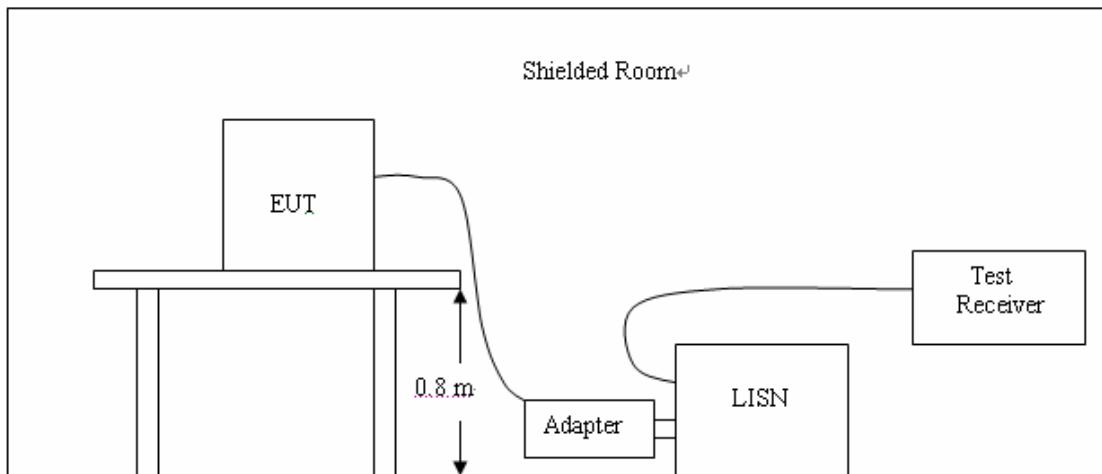

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received DC 6V from adaptor input 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

CONDUCTED LIMIT

According to FCC Subpart 15 B § 15.207 AC Conducted Emission Limits is as following :


Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.1~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

EUT: Data Transceiver Module
 Manufacturer: Peo-Lite, Inc
 Operating Condition: TX mode
 Test Site: 3# SHIELDED ROOM
 Operator: Cary
 Test Specification: AC 120V/60Hz
 Comment: M/N:DTR900-FC
 Start of Test: 1/16/2010 / 4:16:01PM

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

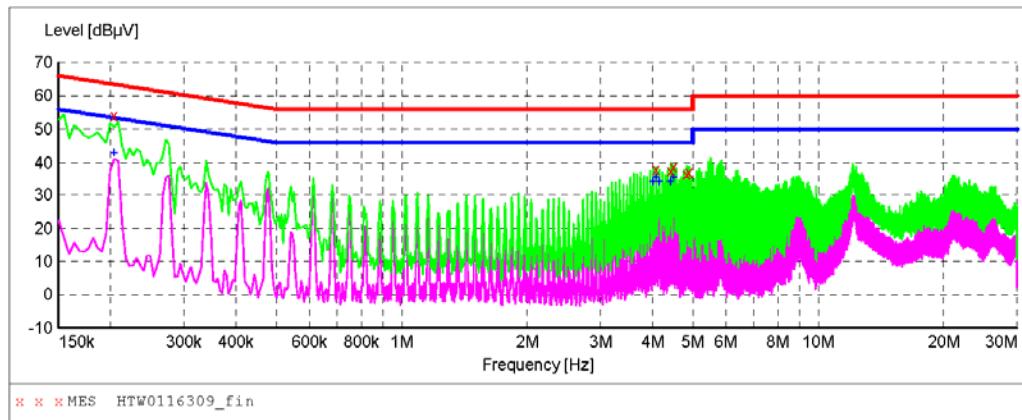**MEASUREMENT RESULT: "HTW0116309_fin"**


1/16/2010 4:18PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.204000	54.10	10.2	63	9.3	QP	N	GND
	4.083000	38.10	10.4	56	17.9	QP	N	GND
	4.425000	37.60	10.4	56	18.4	QP	N	GND
	4.492500	38.70	10.4	56	17.3	QP	N	GND
	4.834500	36.50	10.4	56	19.5	QP	N	GND
	4.902000	37.10	10.4	56	18.9	QP	N	GND

MEASUREMENT RESULT: "HTW0116309_fin2"

1/16/2010 4:18PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.204000	42.80	10.2	53	10.6	AV	N	GND
	4.015500	34.00	10.4	46	12.0	AV	N	GND
	4.083000	35.50	10.4	46	10.5	AV	N	GND
	4.155000	33.90	10.4	46	12.1	AV	N	GND
	4.425000	33.80	10.4	46	12.2	AV	N	GND
	4.492500	35.50	10.4	46	10.5	AV	N	GND

EUT: Data Transceiver Module
 Manufacturer: Peo-Lite, Inc
 Operating Condition: TX mode
 Test Site: 3# SHIELDED ROOM
 Operator: Cary
 Test Specification: AC 120V/60Hz
 Comment: M/N:DTR900-FC
 Start of Test: 1/16/2010 / 4:19:56PM

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

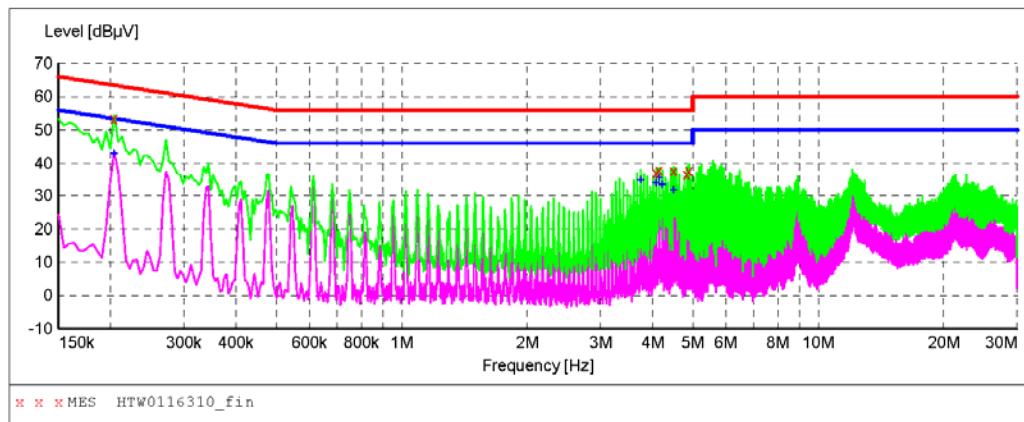

MEASUREMENT RESULT: "HTW0116310_fin"

1/16/2010 4:22PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.204000	53.40	10.2	63	10.0	QP	L1	GND
	4.087500	36.90	10.4	56	19.1	QP	L1	GND
	4.155000	37.90	10.4	56	18.1	QP	L1	GND
	4.492500	37.60	10.4	56	18.4	QP	L1	GND
	4.834500	36.50	10.4	56	19.5	QP	L1	GND
	4.902000	37.60	10.4	56	18.4	QP	L1	GND


MEASUREMENT RESULT: "HTW0116310_fin2"

1/16/2010 4:22PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.204000	42.80	10.2	53	10.6	AV	L1	GND
	3.745500	34.70	10.4	46	11.3	AV	L1	GND
	4.087500	33.70	10.4	46	12.3	AV	L1	GND
	4.155000	35.30	10.4	46	10.7	AV	L1	GND
	4.222500	33.30	10.4	46	12.7	AV	L1	GND
	4.492500	31.70	10.4	46	14.3	AV	L1	GND


4.2. Radiated Emission

TEST CONFIGURATION

Radiated Emission Test Set-Up, Frequency range 30 - 1000MHz

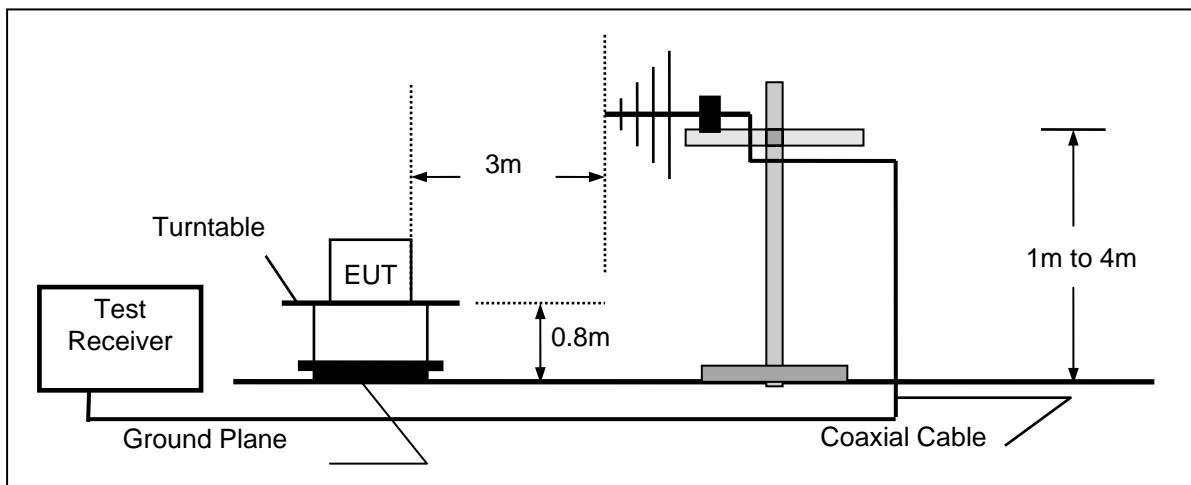

Radiated Emission Test Set-Up, Frequency range 1GHz - 5GHz

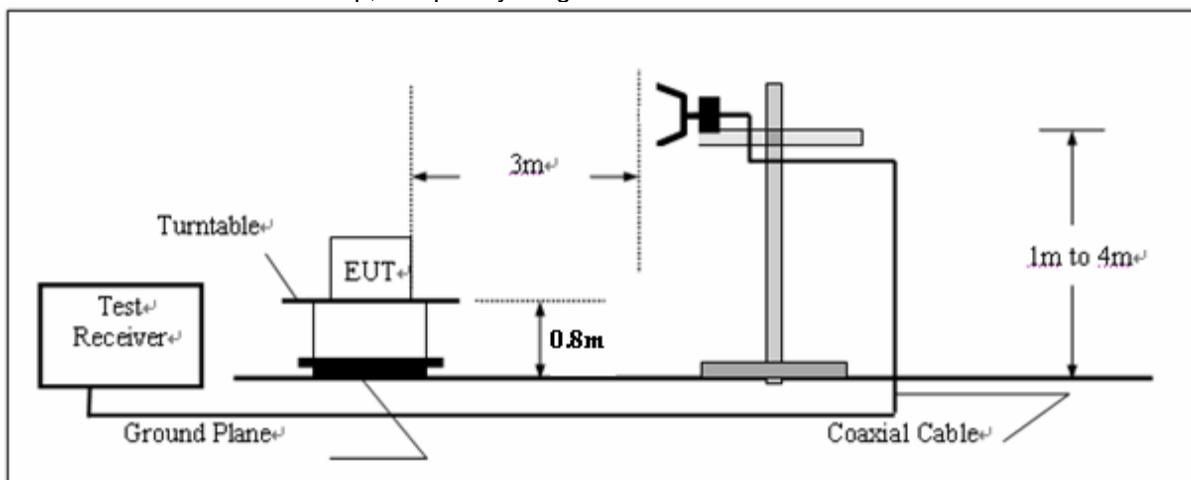

TEST PROCEDURE

- 1, The EUT was placed on a turn table which is 0.8m above ground plane.
- 2, Connect the EUT to the USB port of Notebook, and EUT will transmit automatic at 433.92MHz.
- 3, Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
- 4, And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5, Repeat above procedures until all frequency measurements have been completed.

RADIATION LIMIT

For periodic transmitter, according to § 15.231(e), the field strength of fundamental from device at a distance of 3 meters shall not exceed the following values:

Fundamental frequency (MHz)	Distance (Meters)	Field strength of fundamental (dB μ V/m)	
		AV	Peak
433.92	3	72.87	92.87
Note: For the band 260-470MHz, μ V/m at 3 meters = $16.6667(F) - 2833.333$ Where F is fundamental frequency 433.92MHz			

For periodic transmitter, according to § 15.231(e), the field strength radiated emissions from device at a distance of 3 meters shall not exceed the following values:

Fundamental frequency (MHz)	Distance (Meters)	Field strength of spurious emission	
		(μ V/m)	(dB μ V/m)
40.66-40.70	3	100	40
70-130	3	50	34
130-174	3	50 to 150	34 to 43.5
174-260	3	150	43.5
260-470	3	150 to 500	43.5 to 54
Above 470	3	500	54
Note: 1, For other bands limit pls refer 15.209 2, The limit below 1GHz based CISPR quasi-peak detector, the limit above 1GHz based average detector and peak limit is 74dB μ V/m.			

FCC Part 15B § 15.209, all spurious emissions shall comply with the limits of table as follow:

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)	Radiated (dB μ V/m)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

Note: The spurious emissions shall be attenuated to the average limits shown in above table or to the general limits shown in section 15.209, which limit permits a higher field strength.

TEST RESULTS

The emissions from 1GHz to 5GHz are peak measured peak and average level, below 1GHz measured QLevel, detailed test data please see the following pages.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$


Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Duty Cycle Correction Factor

Duty Cycle = TX on/100ms X 100% = 58.8 ms/100ms X 100% = 58.8%

Duty Cycle Correction Factor = $20\log(\text{Duty Cycle}) = -4.6$

The pulses of 100ms = 1 times

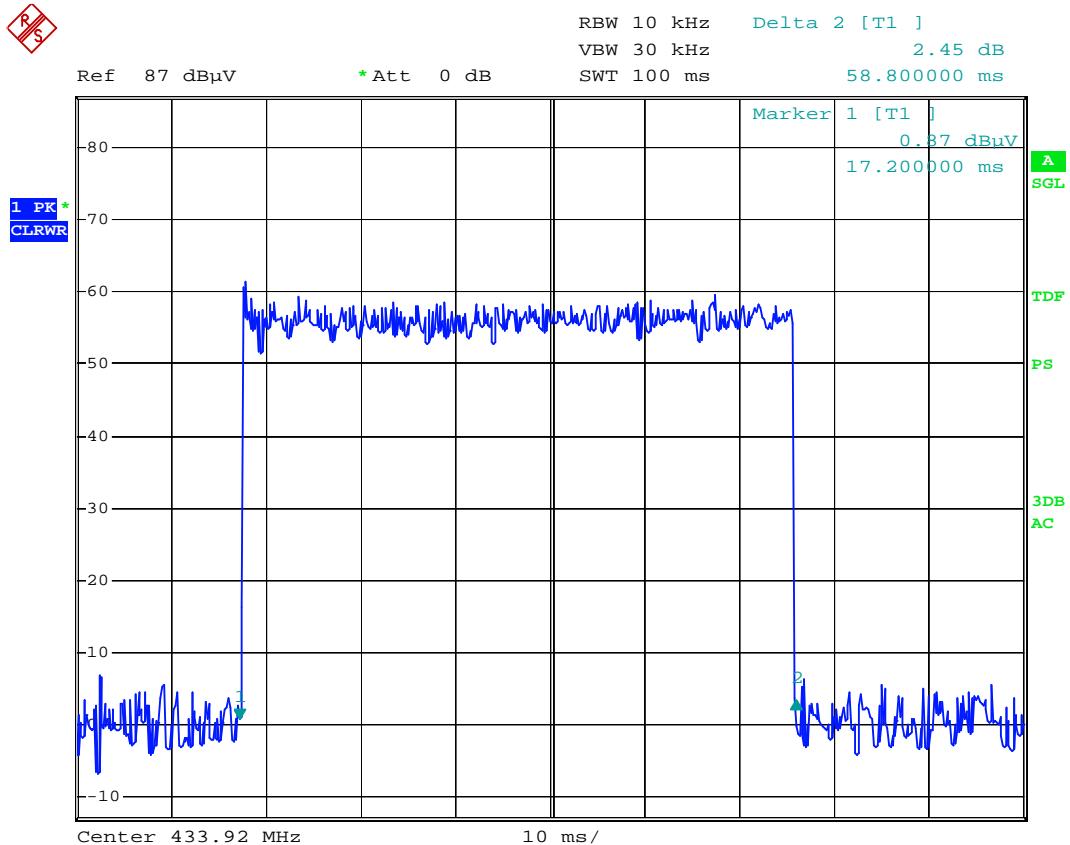


Time of a pulse = 58.8ms

30MHz to 1GHz Test Data

EUT: Data Transceiver Module
 Manufacturer: Pro-Lite, Inc
 Operating Condition: TX mode
 Test Site: 3M CHAMBER
 Operator: Cary
 Test Specification: DC 5V
 Comment: M/N:DTR900-FC
 Start of Test: 1/16/2010 / 10:40:01AM

SWEEP TABLE: "test (30M-1G)"

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	HL562 09

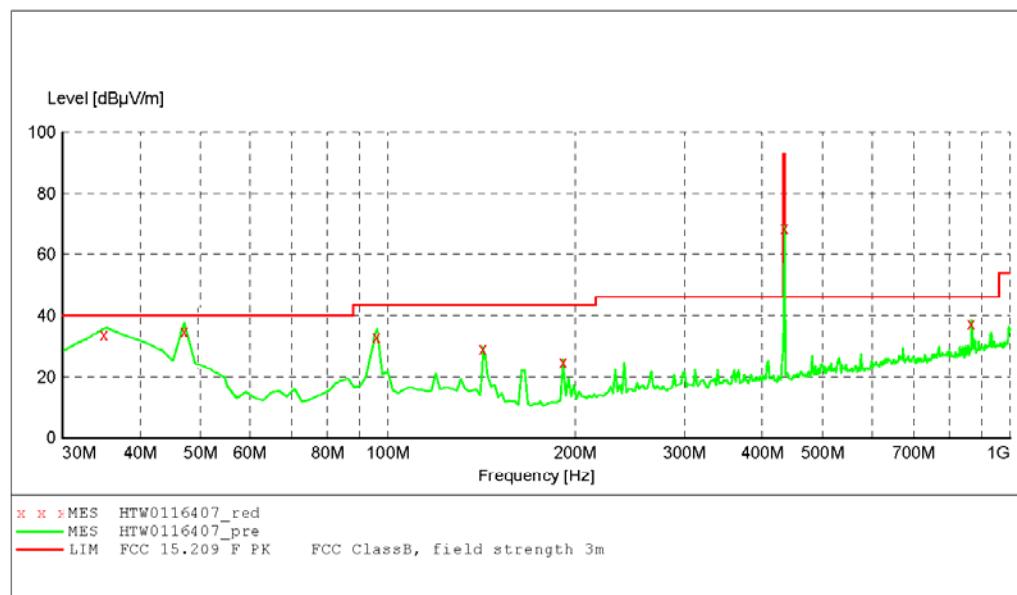***MEASUREMENT RESULT: "HTW0116407_red"***

1/16/2010 10:41AM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
35.943888	32.60	-5.8	40.0	3.4	QP	100.0	144.00	VERTICAL
47.494990	35.10	-14.6	40.0	4.9	QP	100.0	294.00	VERTICAL
96.092184	33.60	-13.8	43.5	9.9	QP	100.0	12.00	VERTICAL
142.745491	28.40	-15.4	43.5	15.1	QP	100.0	287.00	VERTICAL
191.342685	24.90	-16.0	43.5	18.6	QP	100.0	46.00	VERTICAL
867.815631	36.20	0.2	54.0	17.8	QP	100.0	348.00	VERTICAL


Frequency (MHz)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Duty Cycle Correction Factor	Result (dB)	Margin (dB)	Det.
433.92	68.2	92.87	/	68.2	24.67	Peak
	68.2	72.87	-4.6	63.6	9.27	AV

Note: Result = Field Strength + Duty Cycle Correction Factor

EUT: Data Transceiver Module
 Manufacturer: Pro-Lite, Inc
 Operating Condition: TX mode
 Test Site: 3M CHAMBER
 Operator: Cary
 Test Specification: DC 5V
 Comment: M/N:DTR900-FC
 Start of Test: 1/16/2010 / 10:41:47AM

SWEET TABLE: "test (30M-1G)"

Field Strength					
Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	HL562 09

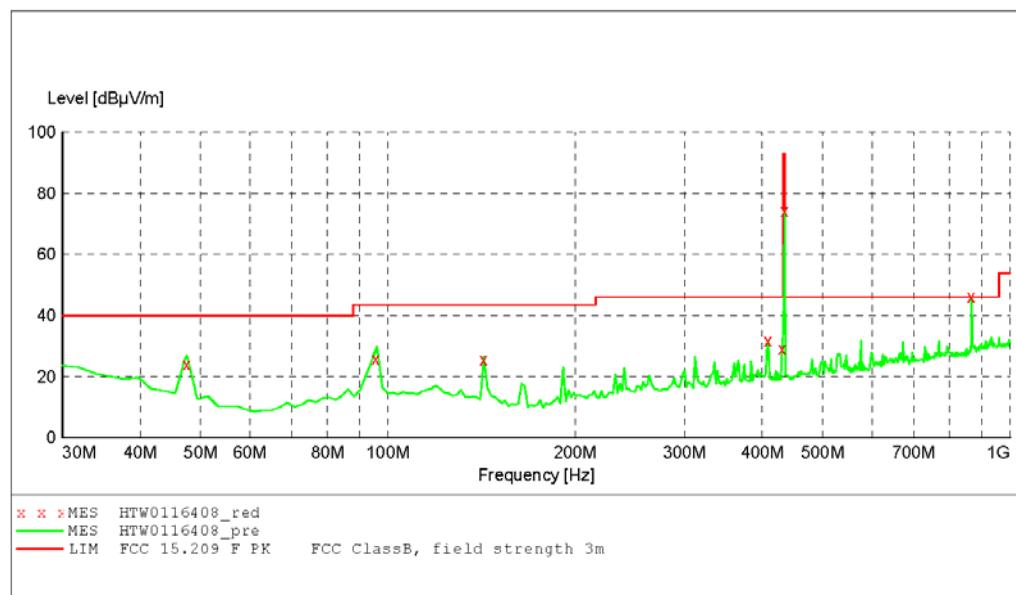

MEASUREMENT RESULT: "HTW0116408_red"

1/16/2010 10:43AM	Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
	MHz	dB μ V/m	dB	dB μ V/m	dB		cm	deg	
	47.494990	27.50	-14.6	40.0	14.5	QP	100.0	204.00	HORIZONTAL
	96.092184	29.70	-13.8	43.5	15.8	QP	100.0	244.00	HORIZONTAL
	142.745491	25.70	-15.4	43.5	18.8	QP	100.0	244.00	HORIZONTAL
	409.058116	31.80	-8.5	46.0	14.2	QP	100.0	204.00	HORIZONTAL
	430.440882	29.10	-8.6	46.0	16.9	QP	100.0	147.00	HORIZONTAL
	867.815631	46.10	0.2	54.0	7.9	QP	100.0	133.00	HORIZONTAL

Frequency (MHz)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Duty Cycle Correction Factor	Result (dB)	Margin (dB)	Det.
433.92	73.5	92.87	/	73.5	19.37	Peak
	73.5	72.87	-4.6	68.9	3.97	AV


Note: Result = Field Strength + Duty Cycle Correction Factor

1GHz to 5GHz Test Data

EUT: Data Transceiver Module
 Manufacturer: Pro-Lite, Inc
 Operating Condition: TX mode
 Test Site: 3M CHAMBER
 Operator: NADA Cary
 Test Specification: AC 230V/50Hz
 Comment: M/N:DTR900-FC
 Start of Test: 1/16/2010 / 6:27:58PM

SWEEP TABLE: "test (1G-18G) P"

Short Description: EN 55022 Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 1.0 GHz 18.0 GHz MaxPeak Coupled 1 MHz HF906 (2007)
 Average

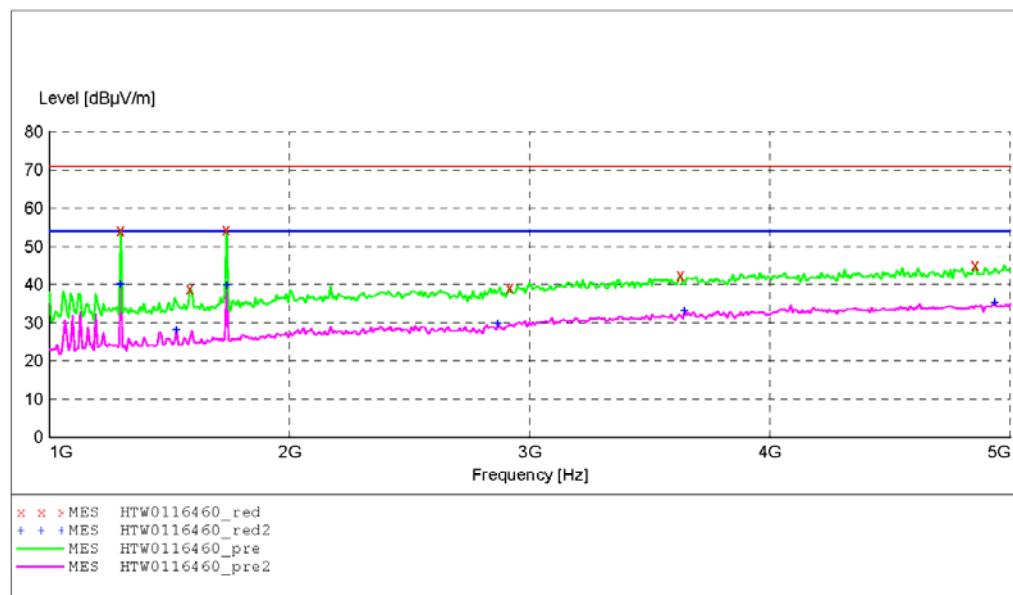***MEASUREMENT RESULT: "HTW0116460_red"***

1/16/2010 6:29PM	Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
	MHz	dB μ V/m	dB	dB μ V/m	dB		cm	deg	
	1296.593186	54.30	-8.1	71.0	16.7	Peak	100.0	59.00	VERTICAL
	1585.170341	39.00	-7.4	71.0	32.0	Peak	100.0	187.00	VERTICAL
	1737.474950	54.40	-6.4	71.0	16.6	Peak	100.0	0.00	VERTICAL
	2915.831663	39.30	-2.3	71.0	31.7	Peak	100.0	285.00	VERTICAL
	3629.258517	42.40	0.5	71.0	28.6	Peak	100.0	151.00	VERTICAL
	4855.711423	45.10	3.4	71.0	25.9	Peak	100.0	110.00	VERTICAL


MEASUREMENT RESULT: "HTW0116460_red2"

1/16/2010 6:29PM	Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
	MHz	dB μ V/m	dB	dB μ V/m	dB		cm	deg	
	1296.593186	40.00	-8.1	54.0	14.0	AV	100.0	59.00	VERTICAL
	1529.058116	28.00	-7.5	54.0	26.0	AV	100.0	171.00	VERTICAL
	1737.474950	39.90	-6.4	54.0	14.1	AV	100.0	171.00	VERTICAL
	2867.735471	29.70	-2.7	54.0	24.3	AV	100.0	207.00	VERTICAL
	3645.290581	33.00	0.6	54.0	21.0	AV	100.0	259.00	VERTICAL
	4935.871743	35.20	3.8	54.0	18.8	AV	100.0	70.00	VERTICAL

EUT: Data Transceiver Module
 Manufacturer: Pro-Lite, Inc
 Operating Condition: TX mode
 Test Site: 3M CHAMBER
 Operator: NADA Cary
 Test Specification: AC 230V/50Hz
 Comment: M/N:DTR900-FC
 Start of Test: 1/16/2010 / 6:30:18PM

SWEET TABLE: "test (1G-18G) P"

Short Description: EN 55022 Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 1.0 GHz 18.0 GHz MaxPeak Coupled 1 MHz HF906(2007)
 Average

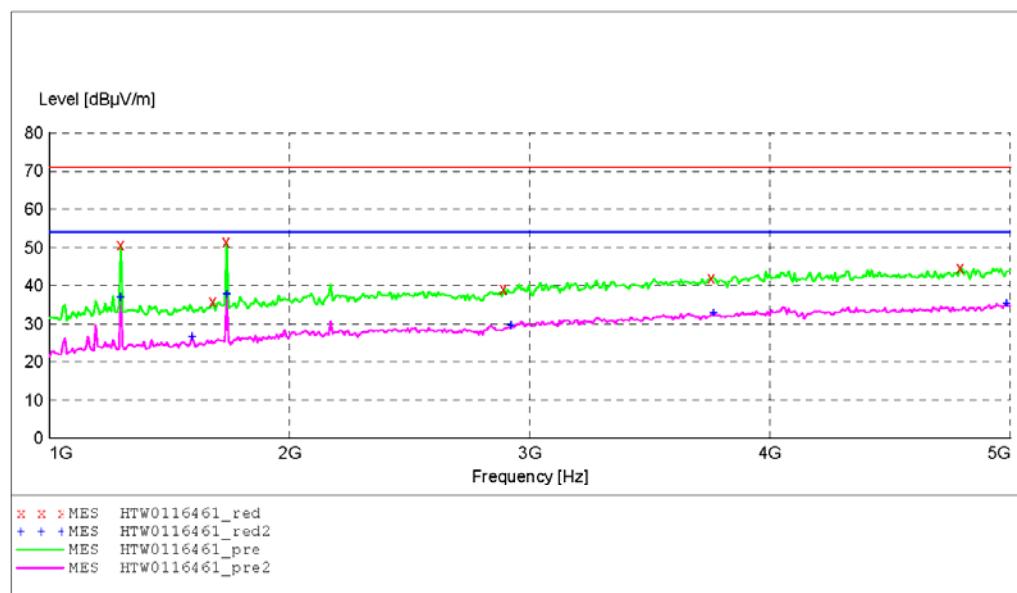

MEASUREMENT RESULT: "HTW0116461_red"


1/16/2010 6:31PM	Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
	MHz	dB μ V/m	dB	dB μ V/m	dB		cm	deg	
	1296.593186	50.70	-8.1	71.0	20.3	Peak	100.0	298.00	HORIZONTAL
	1681.362725	35.90	-6.7	71.0	35.1	Peak	100.0	83.00	HORIZONTAL
	1737.474950	51.50	-6.4	71.0	19.5	Peak	100.0	217.00	HORIZONTAL
	2891.783567	39.30	-2.5	71.0	31.7	Peak	100.0	269.00	HORIZONTAL
	3757.515030	42.10	0.8	71.0	28.9	Peak	100.0	318.00	HORIZONTAL
	4791.583166	44.70	3.1	71.0	26.3	Peak	100.0	133.00	HORIZONTAL

MEASUREMENT RESULT: "HTW0116461_red2"

1/16/2010 6:31PM	Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
	MHz	dB μ V/m	dB	dB μ V/m	dB		cm	deg	
	1296.593186	37.00	-8.1	54.0	17.0	AV	100.0	298.00	HORIZONTAL
	1593.186373	26.60	-7.3	54.0	27.4	AV	100.0	140.00	HORIZONTAL
	1737.474950	37.70	-6.4	54.0	16.3	AV	100.0	217.00	HORIZONTAL
	2923.847695	29.60	-2.3	54.0	24.4	AV	100.0	249.00	HORIZONTAL
	3765.531062	32.90	0.8	54.0	21.1	AV	100.0	360.00	HORIZONTAL
	4983.967936	35.20	4.0	54.0	18.8	AV	100.0	197.00	HORIZONTAL

4.3. Deactivation Time

TEST CONFIGURATION

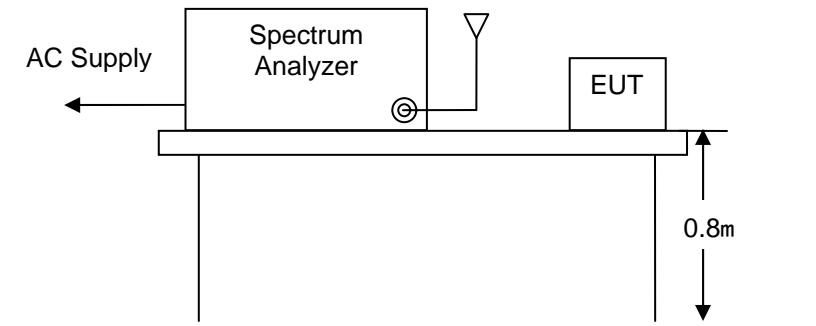

TEST PROCEDURE

- 1 The EUT was placed on a wooden table which is 0.8m height and close to receiver antenna of spectrum analyzer.
- 2 The spectrum analyzer resolution bandwidth was set to 100kHz and video bandwidth was set to 300kHz to encompass all significant spectral components during the test. The spectrum analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

Limit



For periodic transmitter, according to FCC Part 15C § 15.231(e)

Item	Limit (second)
One transmission time	not greater than 1 second
Transmission period	at least 30 times the duration of the transmission but in no case less than 10 second

TEST RESULTS


EUT statement: The transmitter was automatically activated, and the carrier frequency 433.92MHz:

Frequency (MHz)	One transmission time (second)	Transmission period (second)	Result
433.92	0.0592	11.04	Pass

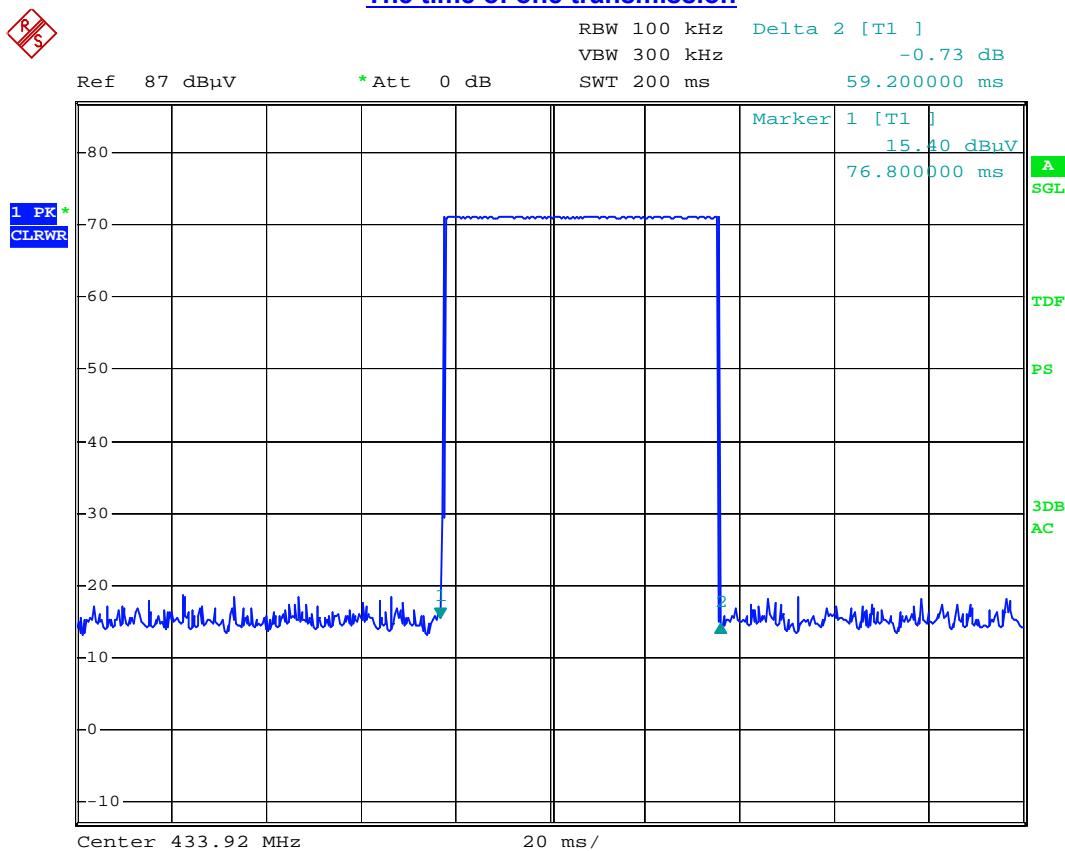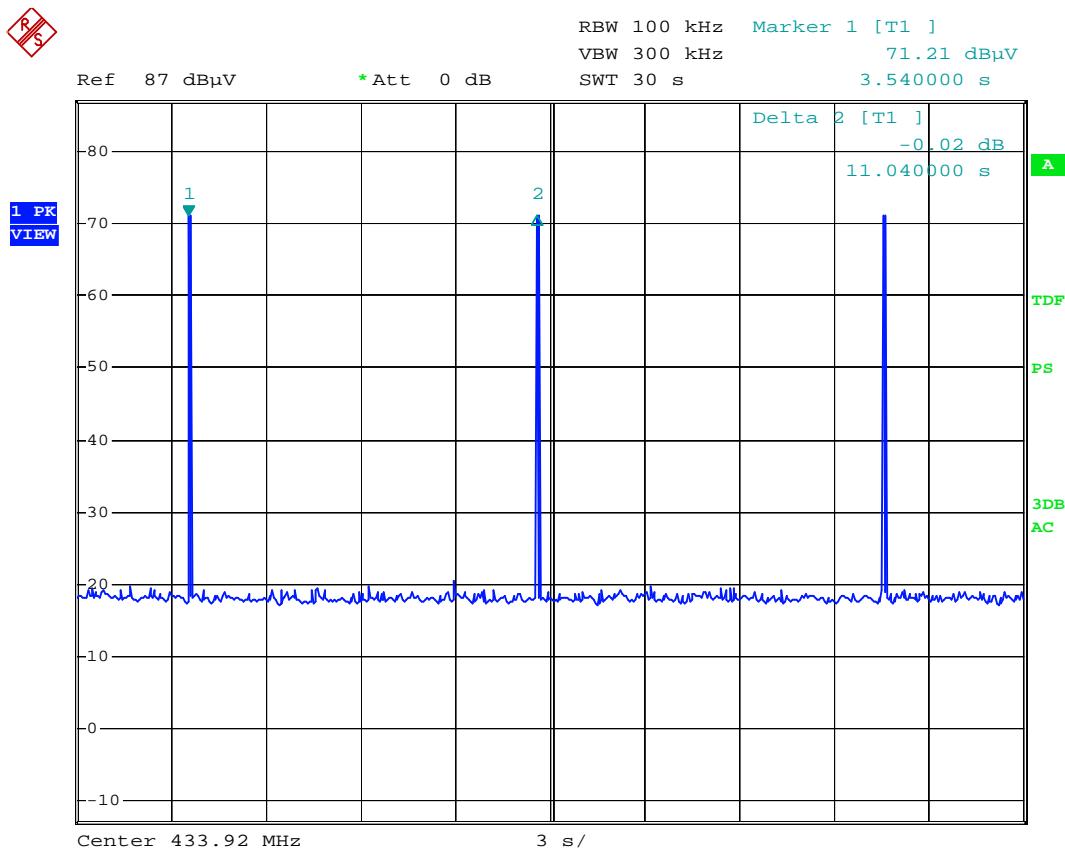The time of one transmissionThe time of transmission period

4.4. 20dB Bandwidth

TEST CONFIGURATION

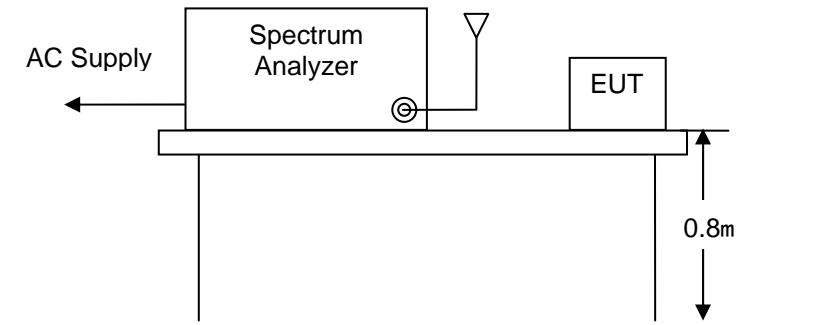

TEST PROCEDURE

- 1 The EUT was placed on a wooden table which is 0.8m height and close to receiver antenna of spectrum analyzer.
- 2 The spectrum analyzer resolution bandwidth was set to 10kHz and video bandwidth was set to 30kHz to encompass all significant spectral components during the test. The detector was set to peak and hold mode to clearly observe the components.


Limit

According to FCC Part 15C § 15.231(c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

TEST RESULTS

Frequency (MHz)	Measurement Bandwidth (KHz)	Limit (kHz)	Result
433.92	296	1085	Pass

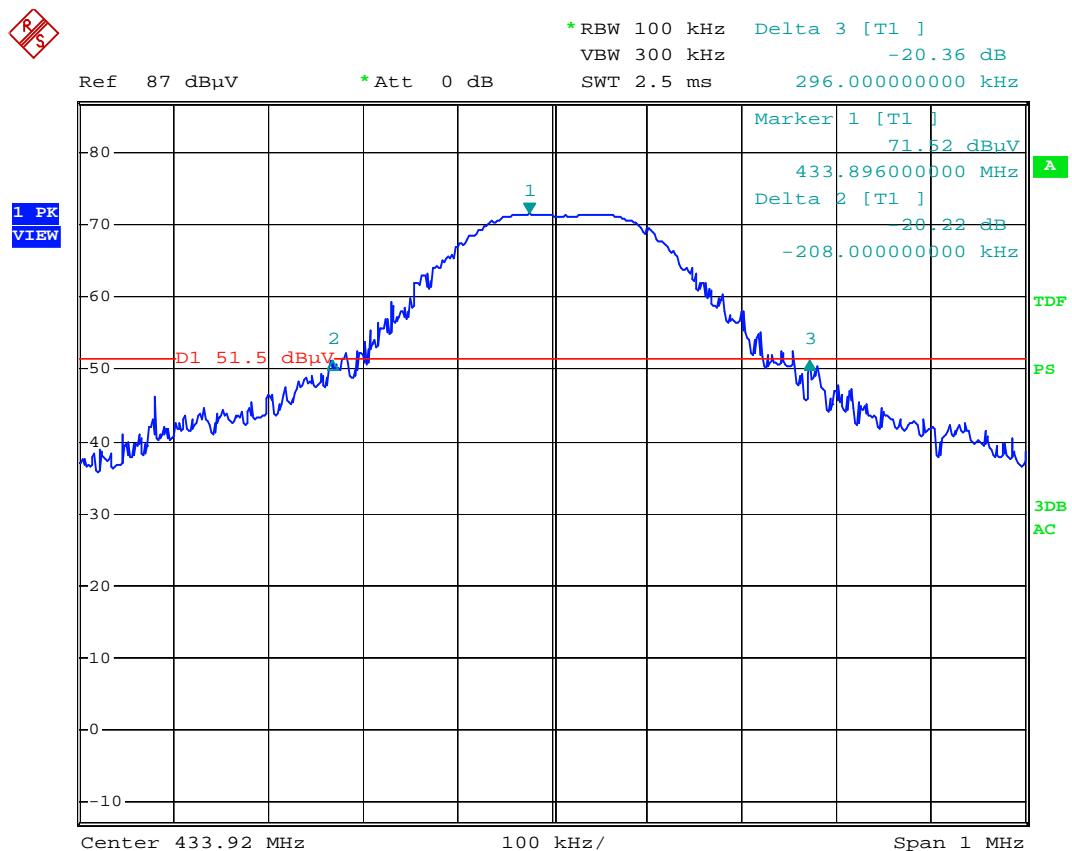20dB Bandwidth

4.5. Antenna Requirement

According to FCC Part 15C § 15.203,

- a), An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b), The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The EUT use of a nonstandard antenna connector(SMA-B), so the EUT meets the requirements of antenna. Detial please see the photos as following:

