



Testing Tomorrow's Technology

Application for

**US Code Title 47, Part 2, Subpart J, Section 2.947, Certification
Per
Part 15, Subpart C, for Intentional Radiators, Section 15.249, Intentional Radiator
Operating within the Band 902 MHz to 928 MHz.**

And

**US Code Title 47, Part 2, Subpart J, Section 2.902, Verification
Per
Part 15, Subpart B, for Unintentional Radiators, section 15.101, 15.107 and 15.109**

For the

SXL1 Model Number: 156136TRKSXL01


Manufactured by

Numerex Corp

UST Project: 10-0191

Issue Date: March 30, 2011

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**

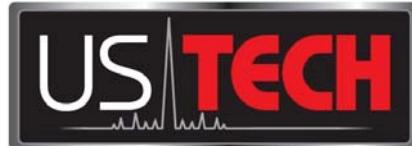

Testing Tomorrow's Technology

I certify that I am authorized to sign for the test facility and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: *Alan Ghasiani*

Name: Alan Ghasiani

Title: Consulting Engineer - President

Date: March 30, 2011

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of U.S. Technologies. The results contained in this report are subject to the adequacy and representative character of the sample provided.

3505 Francis Circle Alpharetta, GA 30004

PH: 770-740-0717 Fax: 770-740-1508

www.ustech-lab.com

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

MEASUREMENT/TECHNICAL REPORT

COMPANY NAME: Orbit One Communications
MODEL: SXL1 Model # 156136TRKSXL01
FCC ID: TWV-SXL1
DATE: March 30, 2011

This report concerns (check one): Original grant Class II change _____

Equipment type: **Intentional Radiator Operating within the bands 902-928 MHz**

Deferred grant requested per 47 CFR 0.457(d) (1) (ii)? yes _____ No

If yes, defer until: _____
date

N.A. agrees to notify the Commission by N.A.
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

SUMMARY OF TEST REQUIREMENTS

<u>FCC Requirement</u>	<u>Title</u>	<u>Disposition</u>
15.205	Restricted Bands	Pass
15.207	Intentional Radiator Power Line Conducted Emissions	Pass
15.209	Intentional Radiator Radiated Emissions	Pass
15.249(a)	Fundamental Field Strength	Pass
15.107	Unintentional Radiator Power Line Conducted Emissions	Pass
15.109	Unintentional Radiator Radiated Emissions	Pass

N/A = Not applicable for this unit.

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp.

Table of Contents

1	GENERAL INFORMATION	8
1.1	PURPOSE OF THIS REPORT	8
1.2	PRODUCT DESCRIPTION	8
1.3	RELATED SUBMITTAL(S)/GRANT(S)	8
2	TESTS AND MEASUREMENTS	10
2.1	CONFIGURATION OF TESTED SYSTEM	10
2.2	EUT CHARACTERIZATION	11
2.3	TEST FACILITY	11
2.4	TEST EQUIPMENT	11
2.5	MODIFICATIONS TO EUT	12
2.6	MEASUREMENT STANDARDS (CFR 15.31)	12
2.7	FREQUENCY RANGE OF RADIATED MEASUREMENTS (CFR 15.33)	13
2.7.1	<i>Frequency Range for Intentional Radiators</i>	13
2.7.2	<i>Frequency Range for Unintentional Radiators</i>	13
2.7.3	<i>Measurement Detector Function and Bandwidth (CFR 15.35)</i>	13
2.8	ANTENNA REQUIREMENT (CFR 15.203)	16
2.9	INTENTIONAL RADIATOR, POWER LINE CONDUCTED EMISSIONS(CFR 15.207)	16
2.10	INTENTIONAL RADIATOR, RADIATED EMISSIONS (CFR 15.249 (A), (E))	17
2.11	RESTRICTED BANDS OF OPERATION (CFR 15.205)	17
2.12	BAND EDGE MEASUREMENTS (CFR15.249(D))	19
2.12.1	<i>High Band Edge</i>	20
2.12.2	<i>Low Band Edge</i>	21
2.13	UNINTENTIONAL RADIATOR, POWER CONDUCTED EMISSIONS (CFR 15.107)	22
SIGNATURE: NAME: KEYVAN MUVAHHED		22
2.14	UNINTENTIONAL RADIATOR, RADIATED EMISSIONS (CFR 15.109)	23
2.15	MEASUREMENT UNCERTAINTY	24
2.15.1	<i>Conducted Emissions Measurement Uncertainty</i>	24
2.15.2	<i>Radiated Emissions Measurement Uncertainty</i>	24

List of Tables

Table 1 - EUT and Peripherals.....	11
Table 2 - Test Instruments used for Evaluation.	12
Table 3 - Base Station Antennas.	16
Table 4 - Peak Fundamental and Harmonics, (CFR15.249 (a))	18
Table 5 – Fund. and Harmonics Average limits, (CFR 15.35(b), 15.249(a)).....	19
Table 6 - Peak Fund. and Harmonics, (CFR 15.35(b), 15.249(a)) (2nd ANT)	Error!
Bookmark not defined.	
Table 7 - Fund. and Harmonics, Average limits (CFR 15.35(b), 15.249(a))(2nd ANT)	Error! Bookmark not defined.
Table 8 – Power line Conducted Emissions Data, Class B.....	22

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

Table 9 - Unintentional Radiator, Peak Radiated Emissions (CFR 15.109)..... 23

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

List of Figures

Figure 1 - Test Configuration	10
Figure 2 - Transmitter Pulse Width.	14
Figure 3– Pulses in a 100 mSec Period.....	15
Figure 4 - Conducted Band Edge Compliance – High Channel Delta - QP	21
Figure 5 - Conducted Band Edge Compliance – Low Channel Delta - QP	21

List of Appendices

Appendix Title

A	Agency Agreement
B	Application Forms
C	Letter of Confidentiality
D	Equipment Label
E	Block Diagram(s)
F	Schematic(s)
G	Test Configuration Photographs
H	Internal Photographs
I	Theory of Operation
J	User's Manual

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of presenting test data to be used by a Telecom Certification Body in determination of whether this product is permitted for unlicensed dissemination to the general public according to the FCC Rules and Regulations for RF Devices Intentional Radiators.

1.2 Product Description

The SXL1 is a satellite based asset tracking device. The device uses the GPS satellite constellation to determine the devices location and the Globalstar satellite network to relay the location information to Numerex's FELIX servers. The SXL1 reports on a configurable interval or on the detection of motion. The SXL1 has a 906MHz ISM band transceiver that is used for configuration of the device, as well as a communications link to the SXL1 Sensor interface. Information from the sensor interface is sent over the Globalstar network to Numerex's FELIX servers.

1.3 Related Submittal(s)/Grant(s)

1.3.1 The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.249 as a transmitter.
- b) Verification under 15.101 as a digital device and receiver.
- c) Certification as a Non-Broadcast Station Transmitter as specified by FCC part 25 (evaluated in a separate test report; see UST test report 10-0190)

1.3.2 Certification of the Transmitter

The EUT employs GFSK digital modulation, but is not being certified under CFR 15.247 because its minimum 6 dB bandwidth is less than 500 kHz and therefore does not meet the CFR 15.247 6 dB bandwidth requirement of 500 kHz or greater. It is instead being presented under the requirements of CFR 15.249.

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

1.3.3 Verification of the Digital apparatus

The Verification requirement shares many common report elements with the Certification report. Therefore, though this report is mostly intended to provide data for the Certification process, the Verification authorization report (part 15.107 and 109) for the Base Station is included herein.

2 Tests and Measurements

2.1 Configuration of Tested System

The sample was setup and tested per ANSI C63.4, Methods of Measurement from Low-Voltage Electrical and Electronic Equipment in the Frequency Range of 9 kHz to 40 GHz (2003). Conducted and radiated emissions data were taken with the EMC test receiver (or spectrum analyzer's) resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. A Block diagram of the tested system is shown in Figure 1. A listing of the EUT and its test peripherals is found in Table 1 below. Test configuration photographs for spurious and fundamental emissions measurements are in the attached appendices.

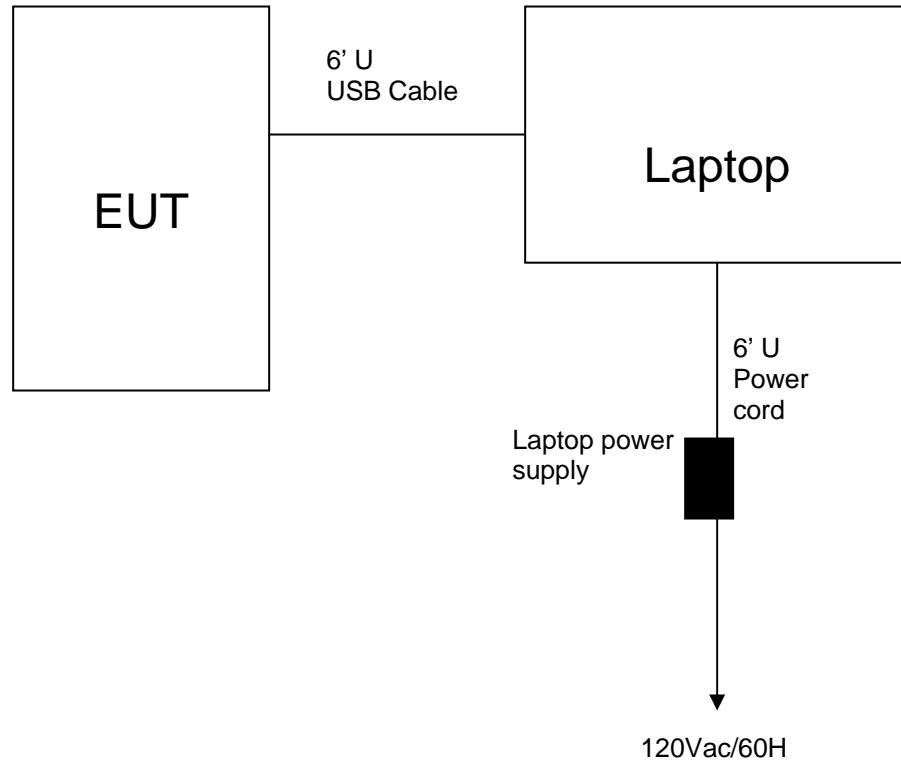


Figure 1 - Test Configuration

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

Table 1 - EUT and Peripherals

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
Orbit One Communications	156136TRKSXL01	Engineering sample	Pending: TWV-SXL1	6' U USB Cable
Laptop and Laptop Power supply IBM	-	--	--	6' U Power cord

2.2 EUT Characterization

The sample used for testing was received by US Tech on September 16, 2010 in good operating condition.

2.3 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and registered with the FCC under designation number US5117. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 2982A-1.

2.4 Test Equipment

Table 2 describes test equipment used to evaluate this product.

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

Table 2 - Test Instruments used for Evaluation.

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	DATE OF LAST CALIBRATION
SPECTRUM ANALYZER	8566B	HEWLETT-PACKARD	2410A00109	10/29/10
SPECTRUM ANALYZER	8593E	HEWLETT-PACKARD	3205A00124	10/18/10
RF PREAMP	8447D	HEWLETT-PACKARD	2944A07436	9/7/10
BICONICAL ANTENNA	BIA-25	Electro-Metrics	2451	12/29/09 2 yr.
LOG PERIODIC	3146	EMCO	3110-3236	1/22/10 2yrs
LISN (x 2) 9247-50-TS-50-N	9247	Solar Electronics	955824 & 955826	1/27/11
HORN ANTENNA	SAS-571	AH Systems	605	2/9/10 2 Year
PREAMP	8449B	HEWLETT-PACKARD	3008A00480	10/21/10
CALCULATION PROGRAM	N/A	N/A	Ver. 6.0	N/A

Note: The calibration interval of the above test instruments is 12 months unless stated otherwise, and all calibrations are traceable to NIST/USA.

2.5 Modifications to EUT

No modifications were made by US Tech to bring the EUT into compliance with FCC Part 15, Subpart B, Class B Limits for the receiver and digital portion of the EUT or the Subpart C, Transmitter requirements.

2.6 Measurement Standards (CFR 15.31)

Intentional and unintentional radiators are to use the methods of ANSI C63.4 – 2003. Measurements were made on an Open Area Test Site (OATS) wherever possible. For battery powered equipment, new (or fully charged) batteries are used.

Section 15.31(m) indicates that because the EUT System operates over the 902 MHz to 928 MHz ISM band, measurements must be made near the bottom of the band (around 902 MHz for example) and in the middle of the band (915 MHz) as well as near the top of the band (928 MHz).

2.7 Frequency Range of Radiated Measurements (CFR 15.33)

The frequency range is detailed below for intentional and unintentional radiators.

2.7.1 Frequency Range for Intentional Radiators

The spectrum was investigated from the lowest RF signal generated without going below 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency (9280 MHz maximum).

2.7.2 Frequency Range for Unintentional Radiators

The spectrum was investigated from the lowest RF signal generated without going below the lowest frequency for which an emissions limit is specified (30 MHz) to the 5th harmonic of the highest fundamental frequency of the digital device (5 GHz maximum).

2.7.3 Measurement Detector Function and Bandwidth (CFR 15.35)

On any frequency below 1000 MHz, the limits shown are based upon measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths. On frequencies above 1000 MHz, the radiation limits are based upon the use of measuring instrumentation employing an average detector function.

When average detector measurements are specified for use, including emission measurements below 1000 MHz, there is also a corresponding limit for Peak detector measurements having a limit of 20 dB above the corresponding average limit unless a different peak emission limit is specified. Measurements above 1000 MHz utilize a minimum resolution bandwidth of 1 MHz.

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

When radiated emissions limits are expressed in terms of the average value of the emission and pulsed operation is employed, the measurement field strength is determined by averaging over one complete pulse train (Duty Cycle) including blanking intervals for pulse trains up to 0.1 second in duration. The exact method of calculating the average field strength is included in paragraph 2.11 of this report. Refer to Figures 1 and 2 for duty cycle measurement data.

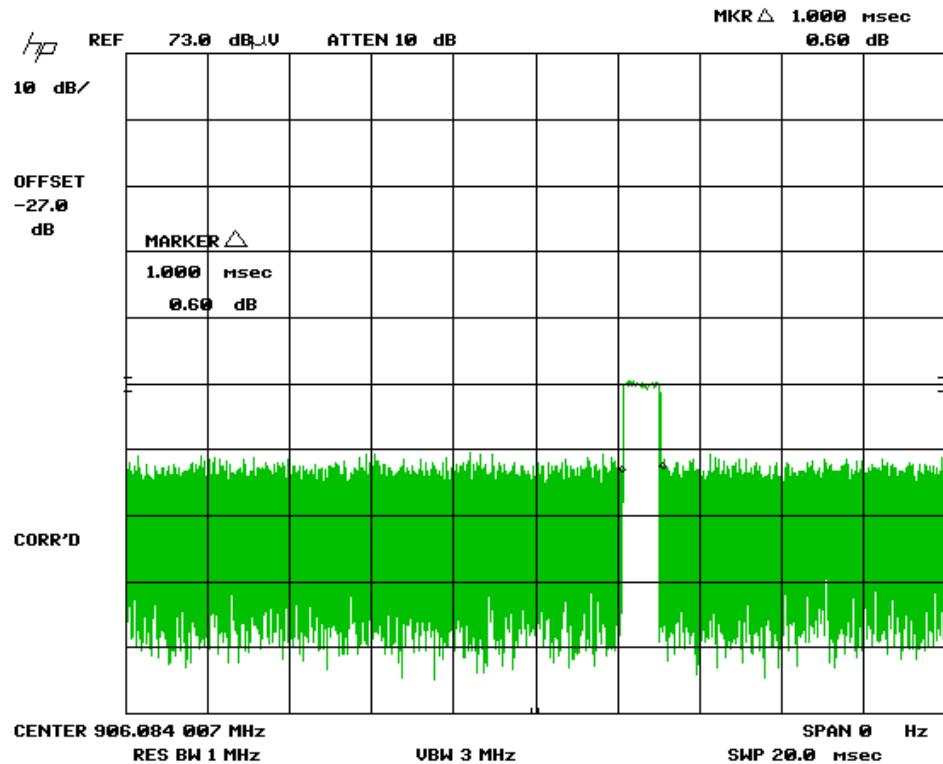


Figure 2 - Transmitter Pulse Width

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

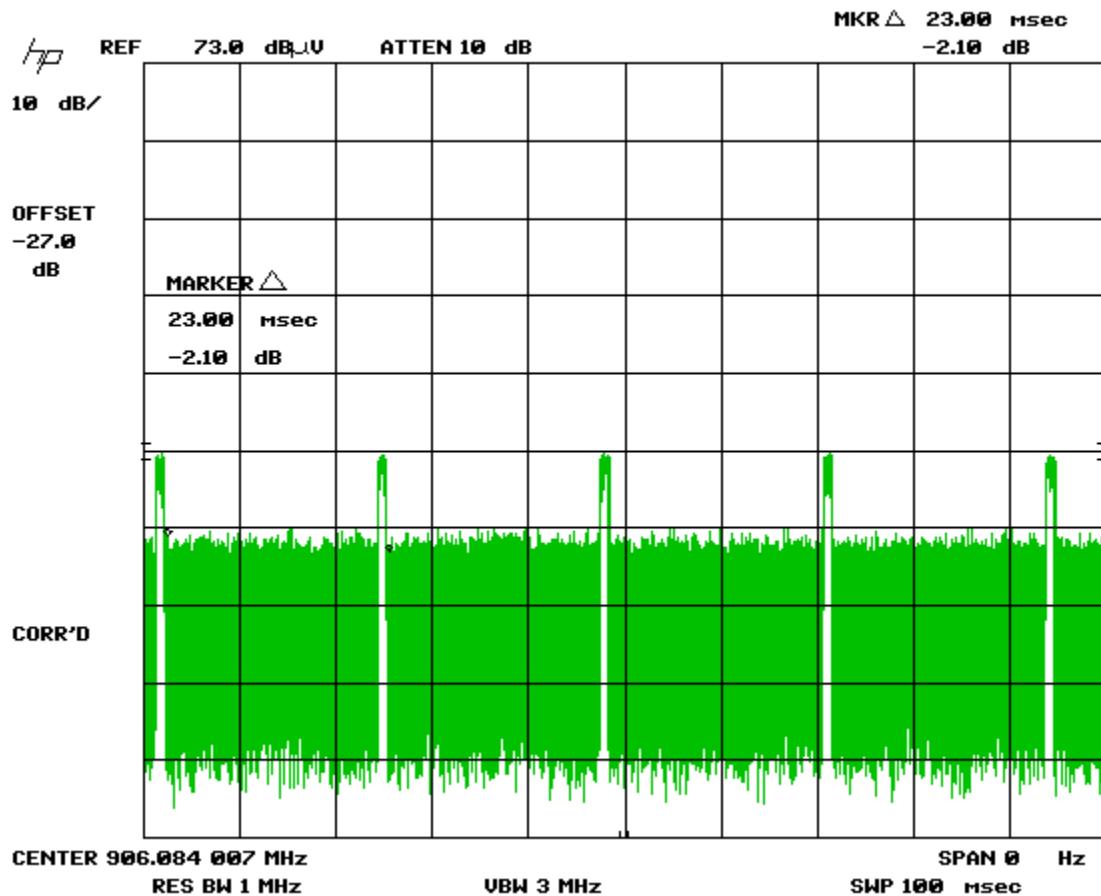


Figure 3 – Pulses in a 100 mS Period

$$1.00\text{mS} \times 5 = 5.00\text{mS}/100\text{mS} = 0.05 = 5.0 \text{ percent}$$

$$\text{DC} = 20 \log (0.05) = \boxed{-26.02 \text{ dB}}$$

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

2.8 Antenna Requirement (CFR 15.203)

The intentional radiator is designed to assure that no antenna other than that furnished by the manufacturer is used with the device. The use of a permanently attached antenna is considered sufficient to comply with this requirement. Below is a table of the permanently attached antenna used with this system and its characteristics. If, in the future, additional antennas are contemplated for use, they must be formally evaluated and approved for suitability to these requirements.

Table 3 - EUT Antenna(s).

Manufacturer	Model Number	Antenna Type	Frequency Range	Peak Gain dBi	Impedance Ohms
Pulse Engineering	W3012	CHIP	902-928MHz	2	50

2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207)

When the EUT is connected to the power lines through its battery charger, it is inhibited from transmitting or receiving, it can only charge the battery. Therefore, this test data is not available.

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

2.10 Intentional Radiator, Radiated Emissions (CFR 15.249 (a), (e))

The EUT frequency hopping was stopped and it was placed into a continuous transmit mode of operation. A preliminary scan was performed on the EUT to find signal frequencies that were caused by the transmitter part of the product and to obtain the worse case result the EUT tested in all X, Y and Z axis. Radiated measurements below 1 GHz were tested with a RBW = 120 kHz. Radiated measurements above 1 GHz were measured using a RBW =1 MHz VBW = 3 MHz.. Test data are found in Tables 4 and 5.

The average values are determined by adding a duty Cycle correction factor onto the peak values. The duty cycle correction factor is found by adding the entire transmitter ON times in a 100 ms period and then dividing that sum by 100 ms and multiplying the resultant by 100%.

$$\text{Duty Cycle Correction Factor, DC} = 20 * \log \left(\frac{\text{ON time}}{100 \text{ mSec}} \times 100\% \right)$$

-26.02 dB

2.11 Restricted Bands of Operation (CFR 15.205)

Only radiated harmonics and other spurious signals can be permitted to fall into the restricted bands of 15.205. All signals found in paragraph 2.7 above shall be examined for this requirement. Limits are based upon the limits of paragraph 15.209. Above 1 GHz, the limits are for Average value. See Tables 4 and 5 below for peak and Average measurements. According to CFR 15.35, the peak limits can exceed the average limits by 20 dB.

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

Table 4 - Peak Fundamental and Harmonics, (CFR15.249 (a))

Radiated Fundamental and Harmonics Emissions									
Test By: K.M.	Test: Fundamental and Harmonics CFR 15.249 (a)				Client: Numerex Corp				
	Project: 10-0191		Class: N/A		Model: Base Station				
Frequency (MHz)	Test Data (dBuV)	DF+FL	AF+CL- PA+DC (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarity (Meters)	Margin (dB)	Det PK / QP	
LOW BAND									
906.08	50.50		25.70	76.20	94.0	3.0m./	17.8	PK	
1812.27	53.63	1.00	-6.24	48.39	74.0	3.0m./	25.6	PK	
2719.02	52.30	1.00	-1.64	51.66	74.0	3.0m./	22.3	PK	
4530.49	42.31	1.00	3.27	46.58	74.0	3.0m./	27.4	PK	
5436.00	38.16	-8.54	6.48	45.64	74.0	1.0m./	27.5	PK	

All other emissions were at least 20 db below the limit.

*Correction factor for distance (DF) = -9.54 dB, and data corrected by 1.0 dB for loss of high pass filter (FL), except for fundamental

SAMPLE CALCULATION: at 906.08 MHz, = 50.50 dBuV+ 25.70 dB/m = 76.20 dBuV/m @ 3m

Tester

Signature: Keyvan Muvahhid

Name: Keyvan Muvahhid

Test Date: March 12, 2011

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

Table 5 – Fund. and Harmonics Average limits, (CFR 15.35(b), 15.249(a))

Radiated Fundamental and Harmonics Emissions									
Test By: K.M.	Test: Fundamental and Harmonics CFR 15.249 (a)				Client: Numerex Corp				
	Project: 10-0191		Class: N/A		Model: Base Station				
Frequency (MHz)	Test Data (dBuV)	DF+FL	AF+CL- PA+DC (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarity (Meters)	Margin (dB)	Det PK / QP	
LOW BAND									
906.08	50.50		25.70	76.20	94.0	3.0m./	17.8	PK	
1812.27	53.63	1.00	-26.24	28.39	54.0	3.0m./	25.6	PK	
2719.02	52.30	1.00	-21.64	31.66	54.0	3.0m./	22.3	PK	
4530.49	42.31	1.00	-16.73	26.58	54.0	3.0m./	27.4	PK	
5436.00	47.70	-8.54	-12.66	26.50	54.0	1.0m./	27.5	PK	

Correction factor for distance (DF) = -9.54 dB, and data corrected by 1.0 dB for loss of high pass filter (FL), except for fundamental

SAMPLE CALCULATION: at 906.08 MHz, = 50.50 dBuV+ 25.70 dB/m = 76.20 dBuV/m @ 3m

Tester

Signature: Keyvan Muvahhid

Name: Keyvan Muvahhid

Test Date: March 12, 2011

Band Edge Measurements (CFR15.249(d))


Band Edge measurements were made at a Low Channel and High Channel peak at highest EUT related emission outside the upper and lower occupied bandwidth. A measurement was made of the fundamental and the emission was measured using a quasi peak setting. A Resolution Bandwidth of > 1% of the emission bandwidth was used. This procedure was repeated for the high channel.

The limits were derived as follows:

2.11.1 High Band Edge

Above 928 MHz the limit per section 15.249(d) is 50 dB below the fundamental or the value expressed by CFR 15.209 (46 dBuV/m) whichever is the lesser attenuation.

The High Channel fundamental recorded in Table 7 is 76.20 dBuV/m.
76.20 - 45.50 = 30.7
Passing Margin = 46 - 30.7 = 15.3

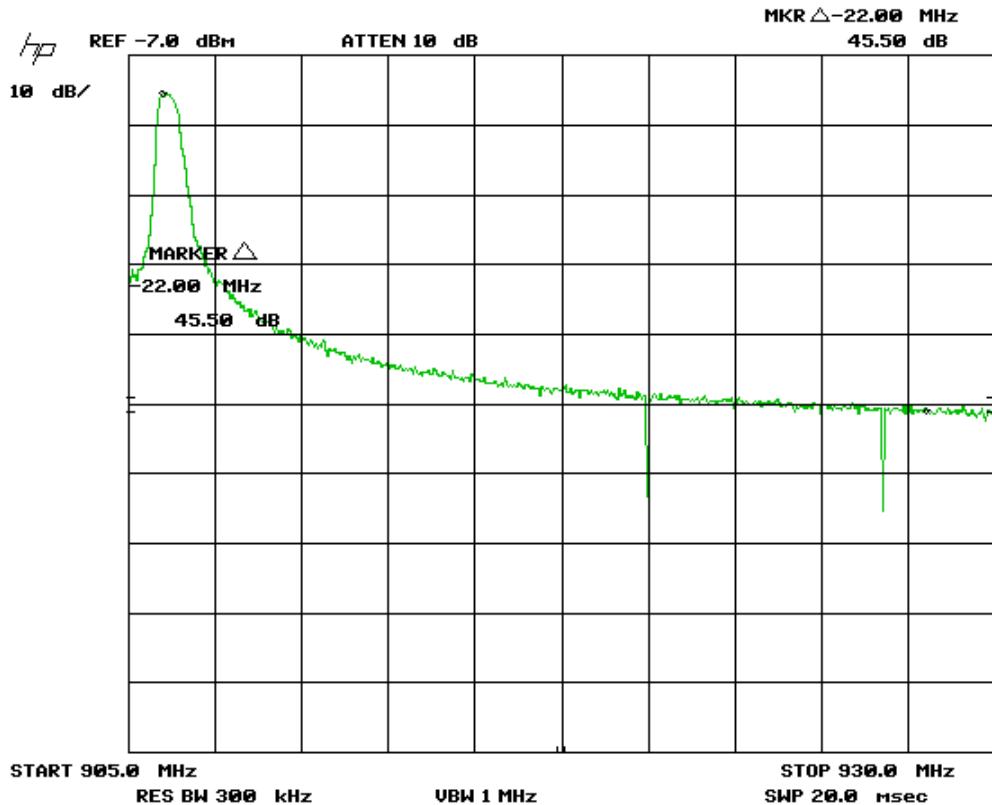

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

Figure 4 - Conducted Band Edge Compliance – High Channel Delta - QP

2.11.2 Low Band Edge

The low channel fundamental recorded in Table 5 is 85.22dB_{UV}/m

$$76.20 - 45.60 = 30.6 \text{ dB}$$

$$\text{Passing Margin} = 46 - 36.32 = 15.6 \text{ dB}$$

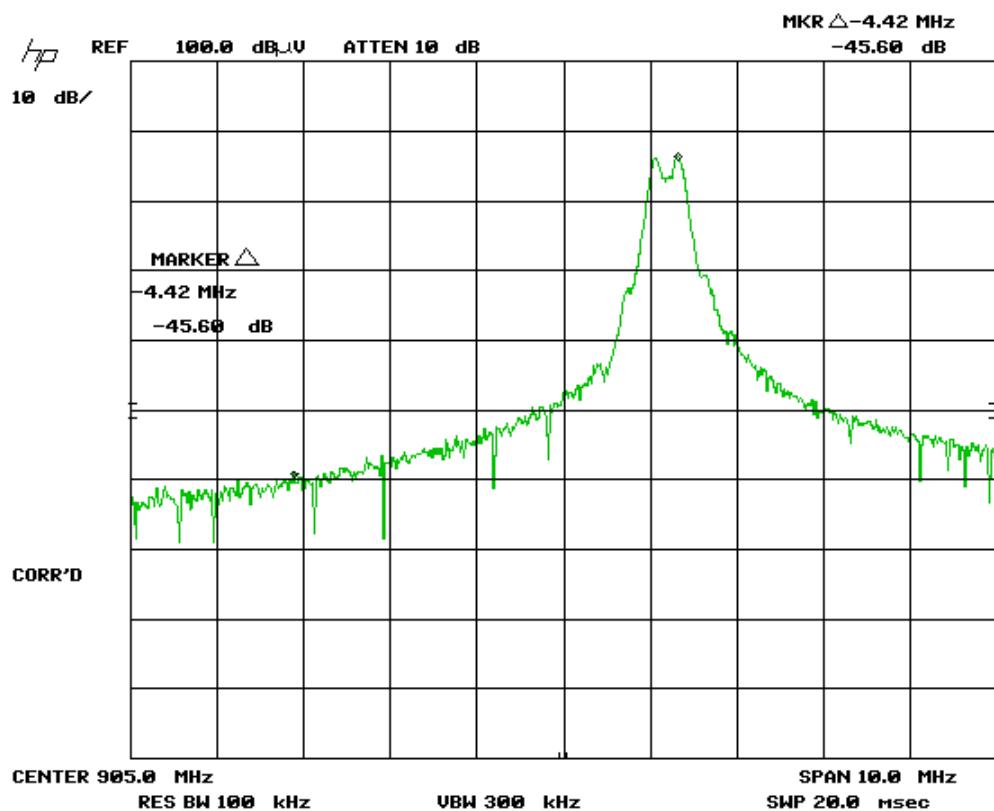


Figure 5 - Radiated Band Edge Compliance – Low Channel

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

2.12 Unintentional Radiator, Conducted Emissions (CFR 15.107)

The unit was set-up and measured for conducted power line emissions. The measurement setup and test procedures were in accordance with ANSI C63.4, paragraph 7. The unit was connected to its power adapter (Motorola model FMP5202A AC power Supply) for measurement. By design, the EUT operating state is such that it is restricted to the battery charge mode only and does not transmit (or receive) while connected to AC power.

Measurements were made over the 150 kHz to 30 MHz frequency range for the unit. The measurement receiver was connected to the RF (receiver) Port on the LISN and each power lead was individually measured. Test results are shown on Table 8 for the unit.

Table 6 – Power line Conducted Emissions Data, Class B.

Power Line Conducted Emissions							
Test By: K.M.	Test: FCC Power Line Conducted Emissions 150 KHz – 30 MHz , Hot Phase			Client: Numerex Corp			
	Project: 10-0191	Sect. 15.107	Class: B	Model: Base Station			
Frequency (MHz)	Test Data (dBuV)	IL+CL -PA (dB)	Results (dBuV)	AVG Limits (dBuV)	Phase /Neutral	Margin (dB)	PK / QP
Hot Line							
0.1520	50.40	0.46	50.86	55.9	Phase	5.0	PK
0.5374	36.00	0.10	36.10	46.0	Phase	9.9	PK
1.0240	34.70	0.10	34.80	46.0	Phase	11.2	PK
6.5950	32.30	0.10	32.40	50.0	Phase	17.6	PK
10.0400	29.40	0.10	29.50	50.0	Phase	20.5	PK
28.4400	24.50	0.40	24.90	50.0	Phase	25.1	PK
Neutral Line							
0.1569	45.80	0.40	46.20	55.6	Neutral	9.4	PK
0.5004	38.30	0.20	38.50	46.0	Neutral	7.5	PK
1.3000	33.70	0.15	33.85	46.0	Neutral	12.1	PK
7.2100	35.50	0.10	35.60	50.0	Neutral	14.4	PK
10.3800	33.20	0.20	33.40	50.0	Neutral	16.6	PK
24.1800	28.60	0.40	29.00	50.0	Neutral	21.0	PK

Tested from 150 kHz to 30 MHz.

SAMPLE CALCULATIONS: at 0.152 MHz, 50.0 dBuV + (- 0.46) = 50.86 dBuV

Tester

Signature: Keyvan Muvahhid

Name: Keyvan Muvahhid

Test Date: March 12, 2011

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

Unintentional Radiator, Radiated Emissions (CFR 15.109)

Radiated emissions within the band 30 MHz to 25 GHz were measured with a spectrum analyzer via a pre-amplifier by connecting the spectrum analyzer to a receiving antenna spaced three (3) meters from the EUT. The spectrum analyzer was set for a $50\ \Omega$ input impedance with the VBW set to $>$ the RBW bandwidth. The antenna was raised and lowered over a span of 4 meters in order to maximize the signal coming from the EUT. Similarly, the turntable was rotated through 360 degrees in the same maximizing effort. Also the EUT was scanned for a maxima when placed in each of the three mutually exclusive orthogonal planes. The results of the measurements are given in Table 9.

Table 7 - Unintentional Radiator, Peak Radiated Emissions (CFR 15.109).

Peak Radiated Emissions, Digital Device and Receiver							
Test By:	Test: Radiated Emissions- 15.109/15.209		Client: Numerex Corp				
S.S.	Project: 10-0191	Requirement Class: B	Model: Base Station				
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	Peak Limits (dBuV/m)	Distance / Polarity (meters)	Margin (dB)	Detector PK / QP
63.4500	26.00	9.41	35.41	40.0	3m./VERT	4.6	PK
119.9800	23.70	13.99	37.69	43.5	3m./VERT	5.8	QP
455.9280	18.60	21.47	40.07	46.0	3m./HORZ	5.9	PK
480.0030	15.20	22.03	37.23	46.0	3m./HORZ	8.8	PK
239.9600	20.10	15.50	35.60	46.0	3m./VERT	10.4	PK
384.0700	16.60	19.32	35.92	46.0	3m./VERT	10.1	PK
408.1210	13.70	19.71	33.41	46.0	3m./VERT	12.6	PK
432.1340	14.70	20.20	34.90	46.0	3m./VERT	11.1	PK
443.9610	17.70	20.73	38.43	46.0	3m./VERT	7.6	PK
456.2300	16.30	21.28	37.58	46.0	3m./VERT	8.4	PK
479.9990	17.10	21.83	38.93	46.0	3m./VERT	7.1	PK
525.2300	15.70	22.68	38.38	46.0	3m./VERT	7.6	PK
1440.80	48.42	-8.42	40.00	54.0	3.0m./H	14.0	PK
3578.65	46.30	0.17	46.47	54.0	3.0m./H	7.5	PK
6763.45	36.68	10.02	46.70	54.0	3.0m./H	7.3	AVG
2306.35	50.04	-3.01	47.03	54.0	3.0m./V	7.0	PK
2364.55	44.26	-2.53	41.73	54.0	3.0m./V	12.3	AVG

SAMPLE CALCULATION: 63.45MHz, = 26.00 dBuV + (9.41) dB = 35.41 dBuV/m

Tester

Signature: Sina Sobhaniyan

Name: Sina Sobhaniyan

Test Date: February 28, 2011

US Tech
Test Report:
Date:
Model:
Customer:

FCC ID: TWV-SXL1
10-0191
March 30, 2011
SXL1 Model # 156136TRKSXL01
Numerex Corp

Measurement Uncertainty

2.12.1 Conducted Emissions Measurement Uncertainty:

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.8 dB.

The data listed in this test report has sufficient margin to negate the effects of uncertainty. This measurement unconditionally passes.

2.12.2 Radiated Emissions Measurement Uncertainty:

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.3 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.1 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.1 dB.

The data listed in this test report does not have sufficient margin to negate the effects of uncertainty, (more than the measurement uncertainty value at 627 MHz). Therefore, this test is conditionally acceptable.