



A D T

PARTIAL FCC TEST REPORT (BLUETOOTH)

REPORT NO.: RF140128C25A-1

MODEL NO.: RTL8723BE / RTL8723BE1T1R / RTL8723BENF

FCC ID: TX2-RTL8723BE

RECEIVED: Mar. 13, 2014

TESTED: Mar. 20, 2014

ISSUED: Mar. 25, 2014

APPLICANT: Realtek Semiconductor Corp.

ADDRESS: No. 2, Innovation Road II, Hsinchu Science Park,
Hsinchu 300, Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan (R.O.C)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



A D T

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1. CERTIFICATION	4
2. SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3 DESCRIPTION OF SUPPORT UNITS	10
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	10
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
4. TEST TYPES AND RESULTS (FOR BLUETOOTH EDR)	11
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	11
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	11
4.1.2 TEST INSTRUMENTS	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2 CONDUCTED EMISSION MEASUREMENT	19
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	19
4.2.2 TEST INSTRUMENTS	19
4.2.3 TEST PROCEDURES	20
4.2.4 DEVIATION FROM TEST STANDARD	20
4.2.5 TEST SETUP	21
4.2.6 EUT OPERATING CONDITIONS	21
4.2.7 TEST RESULTS	22
5. TEST TYPES AND RESULTS (FOR BLUETOOTH LE 4.0)	24
5.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	24
5.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	24
5.1.2 TEST INSTRUMENTS	24
5.1.3 TEST PROCEDURES	25
5.1.4 DEVIATION FROM TEST STANDARD	25
5.1.5 TEST SETUP	26
5.1.6 EUT OPERATING CONDITIONS	26
5.1.7 TEST RESULTS	27
5.2 CONDUCTED EMISSION MEASUREMENT	31
5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	31
5.2.2 TEST INSTRUMENTS	31
5.2.3 TEST PROCEDURES	31
5.2.4 DEVIATION FROM TEST STANDARD	31
5.2.5 TEST SETUP	31
5.2.6 EUT OPERATING CONDITIONS	31
5.2.7 TEST RESULTS	32
6. PHOTOGRAPHS OF THE TEST CONFIGURATION	34
7. INFORMATION ON THE TESTING LABORATORIES	35
8. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	36



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140128C25A-1	Original release	Mar. 25, 2014



A D T

1. CERTIFICATION

PRODUCT: 802.11b/g/n RTL8723BE Combo module

MODEL NO.: RTL8723BE / RTL8723BE1T1R / RTL8723BENF

BRAND: REALTEK

APPLICANT: Realtek Semiconductor Corp.

TESTED: Mar. 20, 2014

TEST SAMPLE: Identical Prototype

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10-2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Gina Lin, **DATE :** Mar. 25, 2014
Gina Liu / Specialist

APPROVED BY : Sam Chen, **DATE :** Mar. 25, 2014
Sam Chen / Senior Project Engineer



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Bluetooth EDR)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -7.94dB at 0.46641MHz.
15.247(d)	Transmitter Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.58dB at 2484MHz.

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247) (Bluetooth LE 4.0)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -5.58dB at 0.50156MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -8.53dB at 796.30MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	802.11b/g/n RTL8723BE Combo module	
MODEL NO.	RTL8723BE / RTL8723BE1T1R / RTL8723BENF	
POWER SUPPLY	20Vdc (adapter)	
MODULATION TYPE	Bluetooth EDR	GFSK, π/4-DQPSK, 8DPSK
	Bluetooth LE 4.0	GFSK
TRANSFER RATE	Bluetooth EDR	1/2/3Mbps
	Bluetooth LE 4.0	1Mbps
OPERATING FREQUENCY	2402 ~ 2480MHz	
NUMBER OF CHANNEL	Bluetooth EDR	79
	Bluetooth LE 4.0	40
CHANNEL SPACING	Bluetooth EDR	1MHz
	Bluetooth LE 4.0	2MHz
ANTENNA TYPE	Refer to NOTE as below	
ANTENNA CONNECTOR	NA	
DATA CABLE	NA	
I/O PORTS	Refer to user's manual	
ACCESSORY DEVICES	Refer to NOTE as below	

NOTE:

1. The antenna information is listed as below

Antenna Type	Brand Name	Parts Number	Antenna Gain
PIFA	Smart Approach Co., Ltd	WLAN Main Antenna: SE-ECVY2-001 WLAN Aux Antenna: SE-ECVY2-001	Main: 1.80 Aux. : -3.13
	HIGH-TEK ELECTRONICS CO., LTD	WLAN Main Antenna: 0ACCN013036 WLAN Aux Antenna: 0ACCN013036	Main: -0.07 Aux. : -1.81
	TONGDA Corporation	WLAN Main Antenna: T-543-9021012-A WLAN Aux Antenna: T-543-9021012-A	Main: 1.98 Aux. : 1.85

❖ Only the antenna with the worst gain has been tested and records the test result in this report.

2. The EUT contains following accessory devices.

ITEM	BRAND	MODEL	DESCRIPTION
AC Adapter	lenovo	ADL135NLC3A	I/P: 100-240Vac, 50-60Hz, 2.5A O/P: 20Vdc, 6.75A 1.8m cable w/ one core
Module	REALTEK	RTL8723BE	--

3. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Bluetooth EDR:

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Bluetooth LE 4.0:

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

BLUETOOTH EDR

EUT CONFIGURE MODE	APPLICABLE TO			DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	
-	✓	✓	✓	-

Where RE \geq 1G: Radiated Emission above 1GHzRE $<$ 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

NOTE: 1. For Radiated emission test, pre-tested GFSK, $\pi/4$ -DQPSK, 8DPSK modulation type and found GFSK was the worse, therefore chosen for the final test and presented in the test report.

2. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	GFSK	DH5

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
-	0 to 78	78	GFSK	DH5

POWER LINE CONDUCTED EMISSION TEST:

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
-	0 to 78	78	GFSK	DH5

Test CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 65%RH	120Vac, 60Hz	Peter Weng
RE $<$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Peter Weng
PLC	25deg. C, 65%RH	120Vac, 60Hz	Johnson Liao



A D T

BLUETOOTH LE 4.0:

EUT CONFIGURE MODE	APPLICABLE TO			DESCRIPTION
	RE≥1G	RE<1G	PLC	
-	√	√	√	-

Where RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.**RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
-	0 to 39	0, 19, 39	GFSK	1.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
-	0 to 39	19	GFSK	1.0

POWER LINE CONDUCTED EMISSION TEST:

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
-	0 to 39	19	GFSK	1.0

Test CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Peter Weng
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Peter Weng
PLC	25deg. C, 65%RH	120Vac, 60Hz	Johnson Liao



A D T

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Bluetooth Tester	R&S	CBT	100870	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: 1. All power cords of the above support units are non shielded (1.8m).

2. Item 1 as a communication partner to transfer data.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

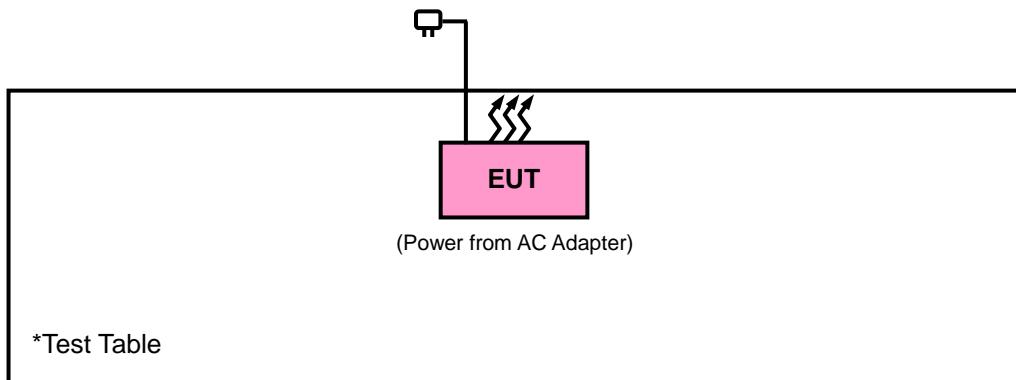

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2009

558074 D01 DTS Meas Guidance v03r01

FCC Public Notice DA 00-705

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

4. TEST TYPES AND RESULTS (FOR BLUETOOTH EDR)

4.1 RADIATED EMISSION AND BANEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100744	Apr. 15, 2013	Apr. 14, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 21, 2013	Dec. 20, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Feb. 19, 2014	Feb. 18, 2015
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 18, 2013	Dec. 17, 2014C
Loop Antenna	HFH2-Z2	100070	Jan. 16, 2014	Jan. 15, 2015
Preamplifier EMCI	EMC 012645	980115	Dec. 26, 2013	Dec. 25, 2014
Preamplifier EMCI	EMC 184045	980116	Jan. 13, 2014	Jan. 12, 2015
Preamplifier EMCI	EMC 330H	980112	Dec. 27, 2013	Dec. 26, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 18, 2013	Oct. 17, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 18, 2013	Oct. 17, 2014
RF signal cable Worken	RG-213	NA	Nov. 07, 2013	Nov. 06, 2014
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Bluetooth Tester	CBT	100980	Apr. 18, 2013	Apr. 17, 2014
Power Meter	ML2495A	1232002	Aug. 23, 2013	Aug. 22, 2014
Power Sensor	MA2411B	1207325	Aug. 23, 2013	Aug. 22, 2014

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in HwaYa Chamber 10.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
5. The FCC Site Registration No. is 690701.
6. The IC Site Registration No. is IC 7450F-10.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Frequency Range 30MHz ~ 1GHz

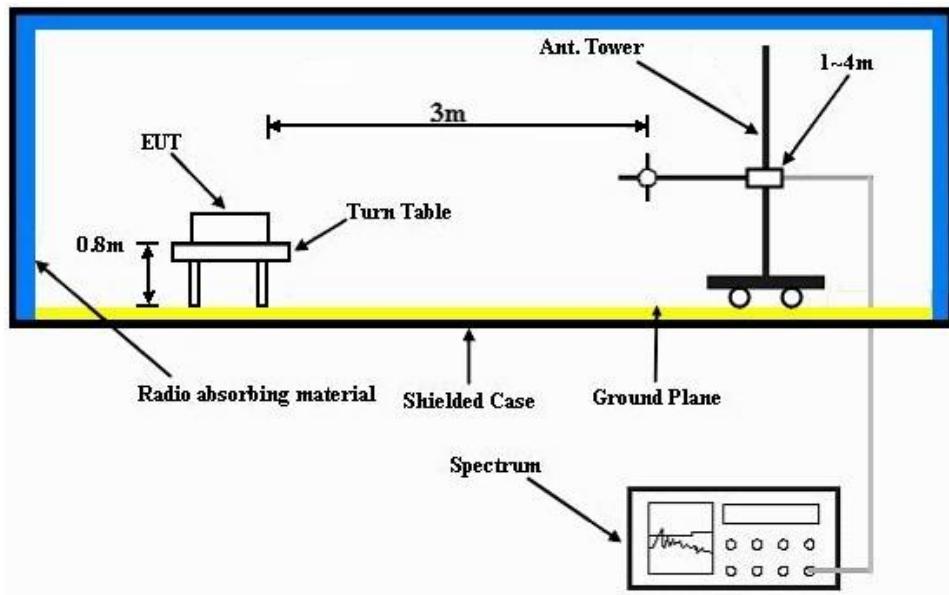

Frequency Range above 1GHz

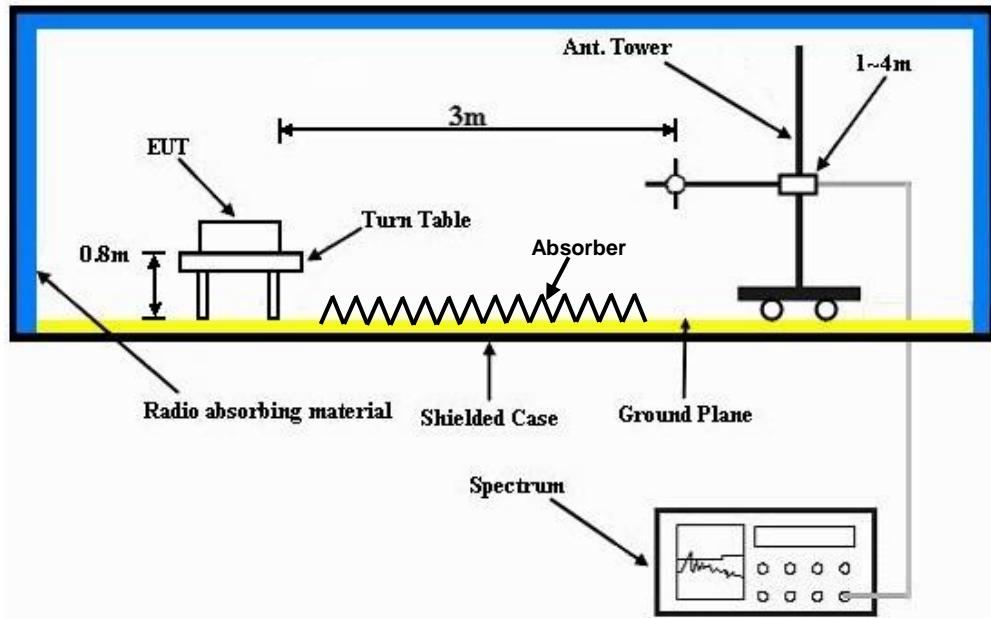

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.



A D T

4.1.7 TEST RESULTS

ABOVE 1GHz WORST-CASE DATA

GFSK

EUT TEST CONDITION		MEASUREMENT DETAIL							
CHANNEL	Channel 0	FREQUENCY RANGE			1GHz ~ 25GHz				
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION			Peak (PK) Average (AV)				
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY			Peter Weng				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	34.1	41.17	54	-19.9	26.91	3.54	37.52	130	230	Average
2390	59.74	66.81	74	-14.26	26.91	3.54	37.52	130	230	Peak
2402	85.89	92.96			26.91	3.54	37.52	130	230	Average
2402	101.59	108.66			26.91	3.54	37.52	130	230	Peak
2484	34.13	40.7	54	-19.87	27.15	3.6	37.32	130	230	Average
2484	50.5	57.07	74	-23.5	27.15	3.6	37.32	130	230	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	34.22	41.29	54	-19.78	26.91	3.54	37.52	125	205	Average
2390	56.34	63.41	74	-17.66	26.91	3.54	37.52	125	205	Peak
2402	86.47	93.54			26.91	3.54	37.52	125	205	Average
2402	101.83	108.9			26.91	3.54	37.52	125	205	Peak
2484	34	40.57	54	-20	27.15	3.6	37.32	125	205	Average
2484	50.21	56.78	74	-23.79	27.15	3.6	37.32	125	205	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2402MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL					
CHANNEL	Channel 39	FREQUENCY RANGE			1GHz ~ 25GHz		
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION			Peak (PK) Average (AV)		
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY			Peter Weng		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	33.98	41.05	54	-20.02	26.91	3.54	37.52	128	223	Average
2390	50.28	57.35	74	-23.72	26.91	3.54	37.52	128	223	Peak
2441	84.79	91.54			27.06	3.58	37.39	128	223	Average
2441	100.41	107.16			27.06	3.58	37.39	128	223	Peak
2484	35.11	41.68	54	-18.89	27.15	3.6	37.32	128	223	Average
2484	51.38	57.95	74	-22.62	27.15	3.6	37.32	128	223	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	34.07	41.14	54	-19.93	26.91	3.54	37.52	125	205	Average
2390	50.48	57.55	74	-23.52	26.91	3.54	37.52	125	205	Peak
2441	87.04	93.79			27.06	3.58	37.39	125	205	Average
2441	102.51	109.26			27.06	3.58	37.39	125	205	Peak
2484	34.87	41.44	54	-19.13	27.15	3.6	37.32	125	205	Average
2484	50.29	56.86	74	-23.71	27.15	3.6	37.32	125	205	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2441MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL					
CHANNEL	Channel 78	FREQUENCY RANGE			1GHz ~ 25GHz		
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION			Peak (PK) Average (AV)		
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY			Peter Weng		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	33.59	40.66	54	-20.41	26.91	3.54	37.52	128	223	Average
2390	50.03	57.1	74	-23.97	26.91	3.54	37.52	128	223	Peak
2480	85.02	91.59			27.15	3.6	37.32	128	223	Average
2480	100.83	107.4			27.15	3.6	37.32	128	223	Peak
2484	36.73	43.3	54	-17.27	27.15	3.6	37.32	128	223	Average
2484	68.42	74.99	74	-5.58	27.15	3.6	37.32	128	223	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	34.07	41.14	54	-19.93	26.91	3.54	37.52	151	212	Average
2390	49.02	56.09	74	-24.98	26.91	3.54	37.52	151	212	Peak
2480	86.61	93.18			27.15	3.6	37.32	151	212	Average
2480	101.92	108.49			27.15	3.6	37.32	151	212	Peak
2484	37.2	43.77	54	-16.8	27.15	3.6	37.32	151	212	Average
2484	66.22	72.79	74	-7.78	27.15	3.6	37.32	151	212	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2480MHz: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA:

EUT TEST CONDITION			MEASUREMENT DETAIL						
CHANNEL		Channel 78			FREQUENCY RANGE		30MHz ~ 1GHz		
INPUT POWER		120Vac, 60 Hz			DETECTOR FUNCTION		Peak (PK) Quasi-peak (QP)		
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH			TESTED BY		Peter Weng		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
43.23	19.42	36.23	40	-20.58	13.59	0.71	31.11	147	198	Peak
168.51	31.35	49.79	43.5	-12.15	11.86	1.44	31.74	166	202	Peak
255.99	37.69	56.08	46	-8.31	11.65	1.85	31.89	134	258	Peak
349.7	35.63	51.09	46	-10.37	14.15	2.23	31.84	124	136	Peak
674.5	33.37	41.36	46	-12.63	20.5	3.33	31.82	126	169	Peak
799.1	36.51	42.03	46	-9.49	22.22	3.69	31.43	131	274	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
30.27	32.22	50.81	40	-7.78	11.98	0.57	31.14	148	210	Peak
165.27	33.7	51.84	43.5	-9.8	12.25	1.42	31.81	139	320	Peak
252.21	31.42	49.96	46	-14.58	11.54	1.84	31.92	132	222	Peak
404.3	33.14	47.34	46	-12.86	15.43	2.44	32.07	178	223	Peak
675.2	33.68	41.66	46	-12.32	20.51	3.34	31.83	109	254	Peak
796.3	39.69	45.25	46	-6.31	22.18	3.68	31.42	199	211	Peak

REMARKS: Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value



4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 17, 2013	Nov. 16, 2014
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 27, 2013	Dec. 26, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 23, 2013	Dec. 22, 2014
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 08, 2013	Jul. 07, 2014
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.



A D T

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

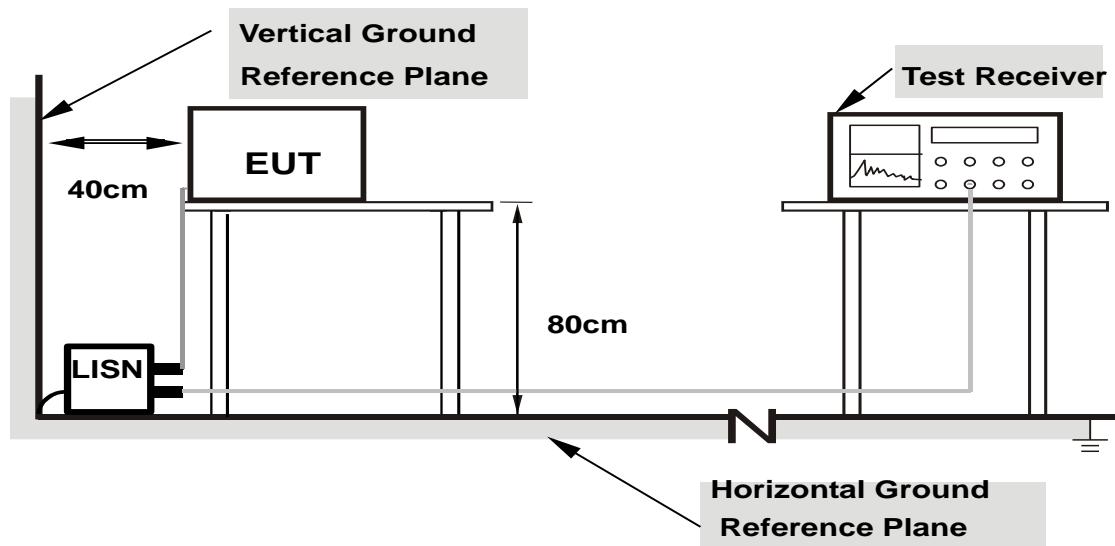

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as section 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA :

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	0.28	26.82	14.51	27.10	14.79	64.08	54.08	-36.98	-39.29
2	0.46641	0.30	28.77	17.87	29.07	18.17	56.58	46.58	-27.50	-28.40
3	0.49375	0.31	40.21	37.09	40.52	37.40	56.10	46.10	-15.59	-8.71
4	0.83750	0.33	25.78	18.47	26.11	18.80	56.00	46.00	-29.89	-27.20
5	5.23438	0.44	30.40	25.78	30.84	26.22	60.00	50.00	-29.16	-23.78
6	15.98047	0.54	22.39	17.01	22.93	17.55	60.00	50.00	-37.07	-32.45

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

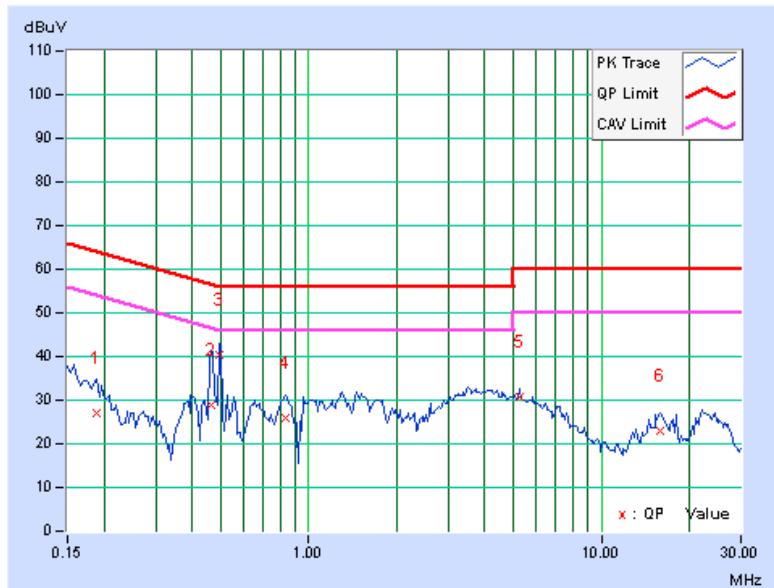


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.46641	0.30	38.68	38.33	38.98	38.63	56.58	46.58	-17.59	-7.94
2	0.49375	0.31	40.71	37.85	41.02	38.16	56.10	46.10	-15.09	-7.95
3	1.55469	0.36	28.38	25.58	28.74	25.94	56.00	46.00	-27.26	-20.06
4	3.49609	0.42	29.81	24.60	30.23	25.02	56.00	46.00	-25.77	-20.98
5	12.57031	0.54	24.84	17.53	25.38	18.07	60.00	50.00	-34.62	-31.93
6	22.76172	0.60	23.89	19.07	24.49	19.67	60.00	50.00	-35.51	-30.33

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

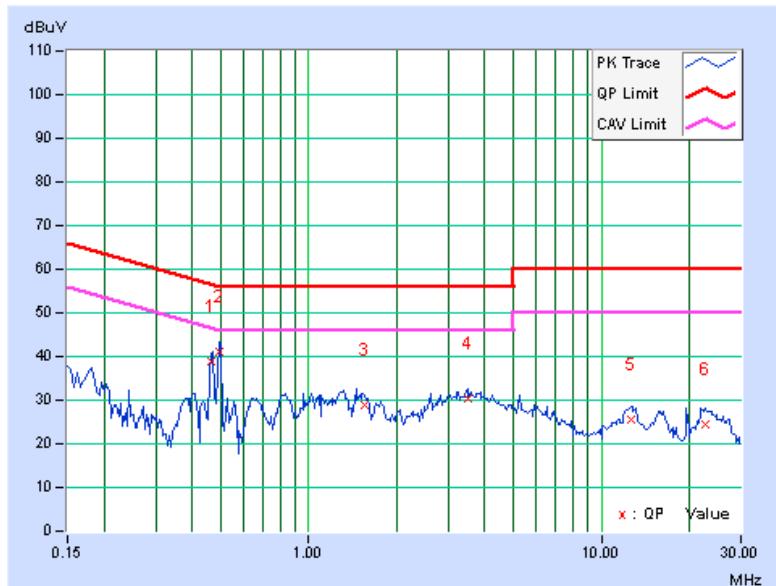



A D T

5. TEST TYPES AND RESULTS (FOR BLUETOOTH LE 4.0)

5.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_{UV}/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

5.1.2 TEST INSTRUMENTS

Same as section 4.1.2.



A D T

5.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

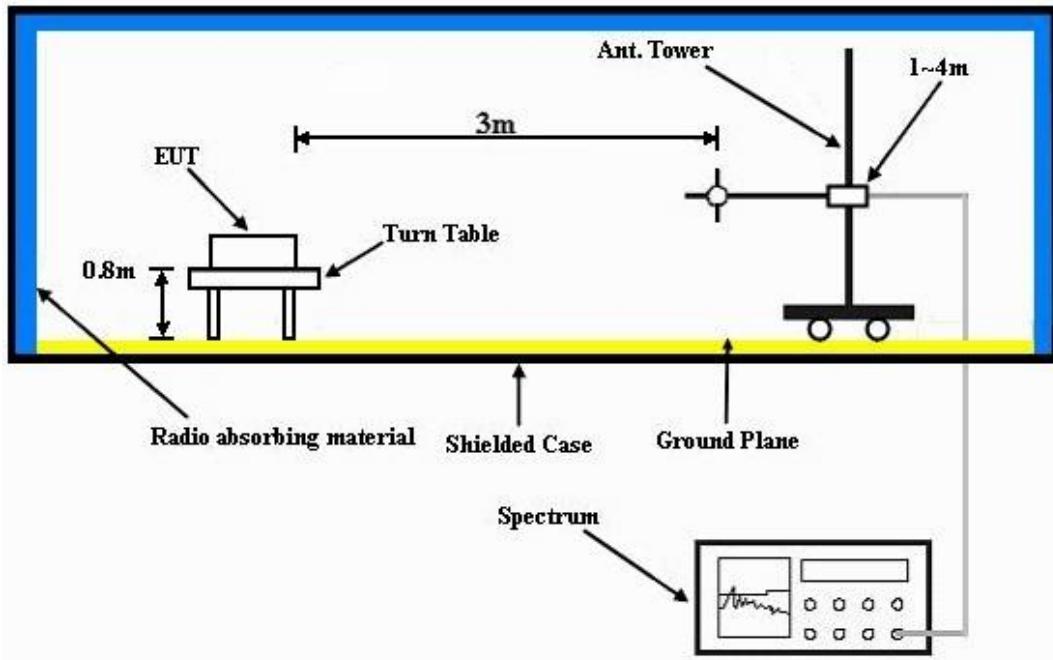

For the actual test configuration, please refer to the attached file (Test Setup Photo).

5.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.



A D T

5.1.7 TEST RESULTS

ABOVE 1GHz WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL							
CHANNEL	Channel 0	FREQUENCY RANGE				1GHz ~ 25GHz			
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION				Peak (PK) Average (AV)			
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY				Peter Weng			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	38.13	44.77	54	-15.87	26.91	3.97	37.52	128	239	Average
2390	57.07	63.71	74	-16.93	26.91	3.97	37.52	128	239	Peak
2402	97.62	104.26			26.91	3.97	37.52	128	239	Average
2402	98.68	105.32			26.91	3.97	37.52	128	239	Peak
2484	35.09	41.22	54	-18.91	27.15	4.04	37.32	128	239	Average
2484	46.81	52.94	74	-27.19	27.15	4.04	37.32	128	239	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	37.08	43.72	54	-16.92	26.91	3.97	37.52	100	223	Average
2390	56.65	63.29	74	-17.35	26.91	3.97	37.52	100	223	Peak
2402	96.36	103			26.91	3.97	37.52	100	223	Average
2402	97.31	103.95			26.91	3.97	37.52	100	223	Peak
2498	35.37	41.36	54	-18.63	27.2	4.06	37.25	100	223	Average
2498	47.43	53.42	74	-26.57	27.2	4.06	37.25	100	223	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2402MHz: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 19		FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY	Peter Weng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2360	39.12	45.88	54	-14.88	26.81	3.92	37.49	133	225	Average
2360	47.28	54.04	74	-26.72	26.81	3.92	37.49	133	225	Peak
2440	97.43	103.82			27.06	4.01	37.46	133	225	Average
2440	98.38	104.77			27.06	4.01	37.46	133	225	Peak
2490	36.66	42.72	54	-17.34	27.2	4.06	37.32	133	225	Average
2490	47.81	53.87	74	-26.19	27.2	4.06	37.32	133	225	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	37.44	44.08	54	-16.56	26.91	3.97	37.52	100	229	Average
2390	46.82	53.46	74	-27.18	26.91	3.97	37.52	100	229	Peak
2440	96.27	102.66			27.06	4.01	37.46	100	229	Average
2440	97.15	103.54			27.06	4.01	37.46	100	229	Peak
2488	36.4	42.46	54	-17.6	27.2	4.06	37.32	100	229	Average
2488	47.83	53.89	74	-26.17	27.2	4.06	37.32	100	229	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2441MHz: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 39		FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY	Peter Weng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2318	35.62	42.48	54	-18.38	26.72	3.89	37.47	128	228	Average
2318	47.53	54.39	74	-26.47	26.72	3.89	37.47	128	228	Peak
2480	97.19	103.32			27.15	4.04	37.32	128	228	Average
2480	98.35	104.48			27.15	4.04	37.32	128	228	Peak
2484	36.56	42.69	54	-17.44	27.15	4.04	37.32	128	228	Average
2484	58.6	64.73	74	-15.4	27.15	4.04	37.32	128	228	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2384	35.46	42.16	54	-18.54	26.86	3.94	37.5	100	231	Average
2384	46.6	53.3	74	-27.4	26.86	3.94	37.5	100	231	Peak
2480	95.46	101.59			27.15	4.04	37.32	100	231	Average
2480	96.7	102.83			27.15	4.04	37.32	100	231	Peak
2484	36.29	42.42	54	-17.71	27.15	4.04	37.32	100	231	Average
2484	57.55	63.68	74	-16.45	27.15	4.04	37.32	100	231	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
2. 2480MHz: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA :

EUT TEST CONDITION		MEASUREMENT DETAIL							
CHANNEL	Channel 19	FREQUENCY RANGE				30MHz ~ 1GHz			
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION				Peak (PK) Quasi-peak (QP)			
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY				Peter Weng			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
50.52	20.17	37.74	40	-19.83	12.97	0.77	31.31	169	202	Peak
167.97	33.52	51.89	43.5	-9.98	11.96	1.43	31.76	166	196	Peak
261.66	38.95	57.15	46	-7.05	11.82	1.87	31.89	198	254	Peak
355.3	37.09	52.48	46	-8.91	14.26	2.25	31.9	167	321	Peak
675.2	33.94	41.92	46	-12.06	20.51	3.34	31.83	173	258	Peak
799.1	36.83	42.35	46	-9.17	22.22	3.69	31.43	144	166	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
30.54	30.78	49.19	40	-9.22	12.14	0.57	31.12	115	269	Peak
83.46	26.54	49.02	40	-13.46	8.18	0.99	31.65	196	222	Peak
160.68	34.29	52.13	43.5	-9.21	12.63	1.39	31.86	173	251	Peak
405	33.82	47.97	46	-12.18	15.45	2.45	32.05	199	254	Peak
675.2	34.83	42.81	46	-11.17	20.51	3.34	31.83	104	205	Peak
796.3	37.47	43.03	46	-8.53	22.18	3.68	31.42	158	244	Peak

REMARKS: Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value



A D T

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

Same as section 4.2.1

5.2.2 TEST INSTRUMENTS

Same as section 4.2.2

5.2.3 TEST PROCEDURES

Same as section 4.2.3

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as section 4.2.5

5.2.6 EUT OPERATING CONDITIONS

Same as section 4.1.6

5.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA :

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.46641	0.30	39.16	38.43	39.46	38.73	56.58	46.58	-17.11	-7.84
2	0.50156	0.31	40.79	39.56	41.10	39.87	56.00	46.00	-14.90	-6.13
3	1.46094	0.35	30.22	24.82	30.57	25.17	56.00	46.00	-25.43	-20.83
4	5.23047	0.44	29.21	23.21	29.65	23.65	60.00	50.00	-30.35	-26.35
5	15.71875	0.54	21.06	15.16	21.60	15.70	60.00	50.00	-38.40	-34.30
6	22.62500	0.56	24.33	19.68	24.89	20.24	60.00	50.00	-35.11	-29.76

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

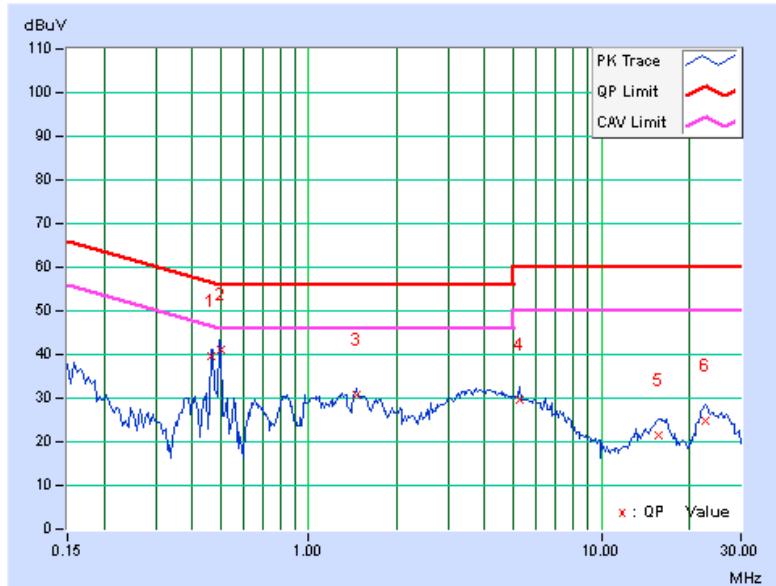


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.46641	0.30	38.93	38.61	39.23	38.91	56.58	46.58	-17.34	-7.66
2	0.50156	0.31	41.17	40.11	41.48	40.42	56.00	46.00	-14.52	-5.58
3	1.82813	0.36	22.53	15.64	22.89	16.00	56.00	46.00	-33.11	-30.00
4	5.23828	0.46	26.87	21.65	27.33	22.11	60.00	50.00	-32.67	-27.89
5	15.96875	0.58	23.99	19.05	24.57	19.63	60.00	50.00	-35.43	-30.37
6	22.32031	0.61	22.22	16.89	22.83	17.50	60.00	50.00	-37.17	-32.50

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

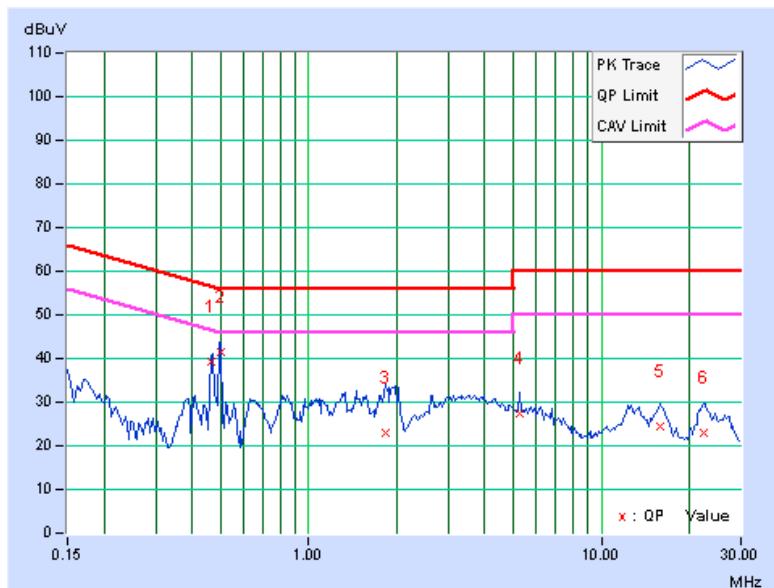



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---