



## FCC RADIO TEST REPORT

Applicant's company	<b>Realtek Semiconductor Corp.</b>
Applicant Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
FCC ID	<b>TX2-RTL8723BE</b>
Manufacturer's company	<b>Realtek Semiconductor Corp.</b>
Manufacturer Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Product Name	802.11b/g/n RTL8723BE Combo module
Brand Name	REALTEK
Model No.	RTL8723BE
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Feb. 08, 2013
Final Test Date	Feb. 12, 2015
Submission Type	Class II Change

### Statement

**Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB KDB 558074 D01 v03r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Class II Change .....	6
3.6. Table for Test Modes.....	7
3.7. Table for Testing Locations.....	8
3.8. Table for Supporting Units .....	8
3.9. Test Configurations .....	9
<b>4. TEST RESULT .....</b>	<b>12</b>
4.1. AC Power Line Conducted Emissions Measurement.....	12
4.2. Maximum Conducted Output Power Measurement.....	16
4.3. Radiated Emissions Measurement.....	19
4.4. Emissions Measurement.....	38
4.5. Antenna Requirements .....	56
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>57</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>59</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A8</b>
<b>APPENDIX B. ANTENNA LIST</b>	



## History of This Test Report



## 1. VERIFICATION OF COMPLIANCE

Product Name : 802.11b/g/n RTL8723BE Combo module  
Brand Name : REALTEK  
Model No. : RTL8723BE  
Applicant : Realtek Semiconductor Corp.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 08, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Sam Chen'.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.17 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	13.22 dB
4.3	15.247(d)	Radiated Emissions	Complies	3.67 dB
4.4	15.247(d)	Band Edge Emissions	Complies	1.88 dB
4.5	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Maximum Conducted Output Power	MCS0 (20MHz): 16.05 dBm ; MCS0 (40MHz): 16.12 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### IEEE 802.11b/g

Items	Description
Product Type	802.11b :WLAN (1TX, 1RX) 802.11g :WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Maximum Conducted Output Power	11b: 16.78 dBm ; 11g: 16.14 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Band width**

Antenna	Single (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

**IEEE 11n Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	1	MCS 0-7
802.11n (HT40)	1	MCS 0-7

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40.  
Note 2: Modulation modes consist of below configuration:  
HT20/HT40: IEEE 802.11n

### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	LYNwave	ALA110-222050-300011	PIFA Antenna	I-PEX MHF4	3.5	NGFF Board

This project added one configuration of EUT. The more information is listed as below table.

Configuration	Type	Power Type	Antenna Variety	Antenna Connector	Type of Antenna
1	NGFF	PCI-E (WLAN)	-	One	PIFA with I-PEX MHF4 connector
		USB (Bluetooth)			

#### For WLAN 802.11b/g/n (1TX, 1RX) mode:


Chain 1 could transmit/receive simultaneously.

#### For Bluetooth mode:

Chain 1 could transmit/receive simultaneously.

The bluetooth gets into idle mode while the WiFi works.

The WiFi gets into idle mode while the bluetooth works.

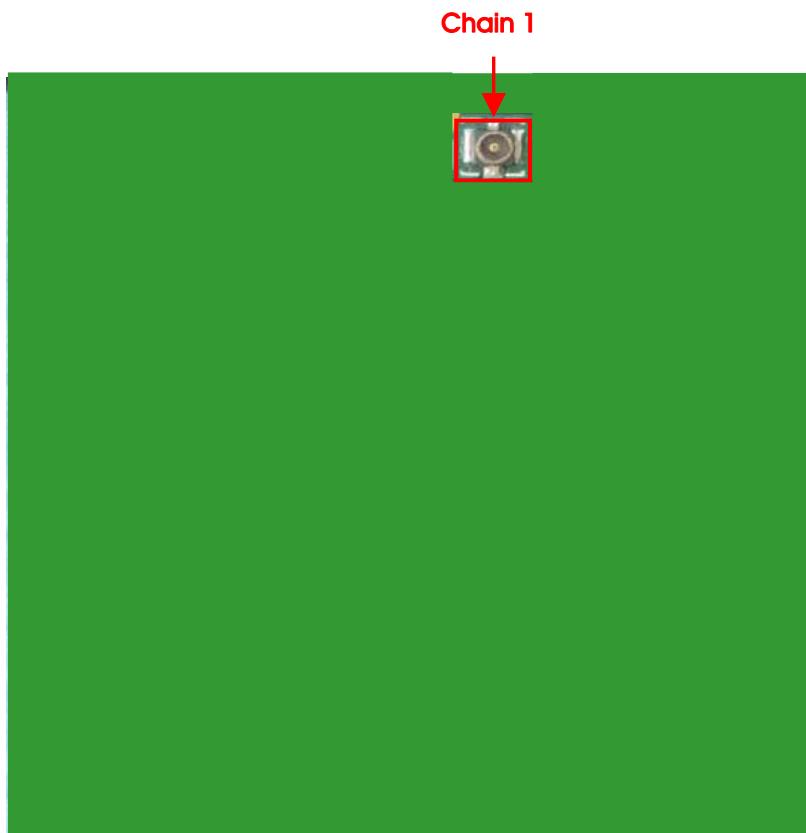

### 3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

### 3.5. Table for Class II Change

This product is an extension of original report under Sporton project number: FR322105-22AA

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding one connector of original certified NGFF type device.	<ol style="list-style-type: none"> <li>AC Power Line Conducted Emissions</li> <li>Radiated Emissions</li> <li>Band Edge Emissions</li> </ol> <p>After evaluating, these test items should be tested and recorded in this report.</p>
2. Adding same type of PIFA antenna with lower gain than the original Certificate, and the total antennas amounted to 488 sets.	Do not have to retest assessed.

Note: Radiated Emissions (above 1GHz) and Band Edge Emissions were retested based on Maximum

Conducted Output Power of original report: FR322105AA

### 3.6. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
	11n HT40	MCS0	3/6/9	1

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. NGFF (WLAN) + PIFA Ant.

Mode 2. NGFF (Bluetooth) + PIFA Ant.

Mode 1 generated the worst test result, so it was recorded in this report.

**For Radiated Emission test<Below 1GHz>:**

Mode 1. NGFF (WLAN) + PIFA Ant.

Mode 2. NGFF (Bluetooth) + PIFA Ant.

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test<Above 1GHz>:**

Mode 1. NGFF + PIFA Ant.

### 3.7. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.8. Table for Supporting Units

For Test Site No : CO01-CB

Support Unit	Brand	Model	FCC ID
AP Router	Planex	GW-AP54SGX	KA220030603014-1
Test Fixture	Realtek	N/A	N/A
NB	DELL	E4300	N/A
Mouse	HP	FM100	DoC
Earphone	SHYARO CHI	MIC-04	DoC

For Test Site No : 03CH01-CB <Below 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
Mouse	Logitech	M-U0026	DoC
Earphone	E-BOOKI	E-EPC040	N/A
Test Fixture	Realtek	N/A	N/A
Wireless AP	Planex	GW-AP54SGX	N/A

For Test Site No : 03CH01-CB <Above 1GHz>



Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC
Test Fixture	Realtek	N/A	N/A

For Test Site No : TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	E2KWM3945ABG
Test Fixture	Realtek	N/A	N/A

### 3.9. Test Configurations



#### 3.9.1. AC Power Line Conduction Emissions Test Configuration

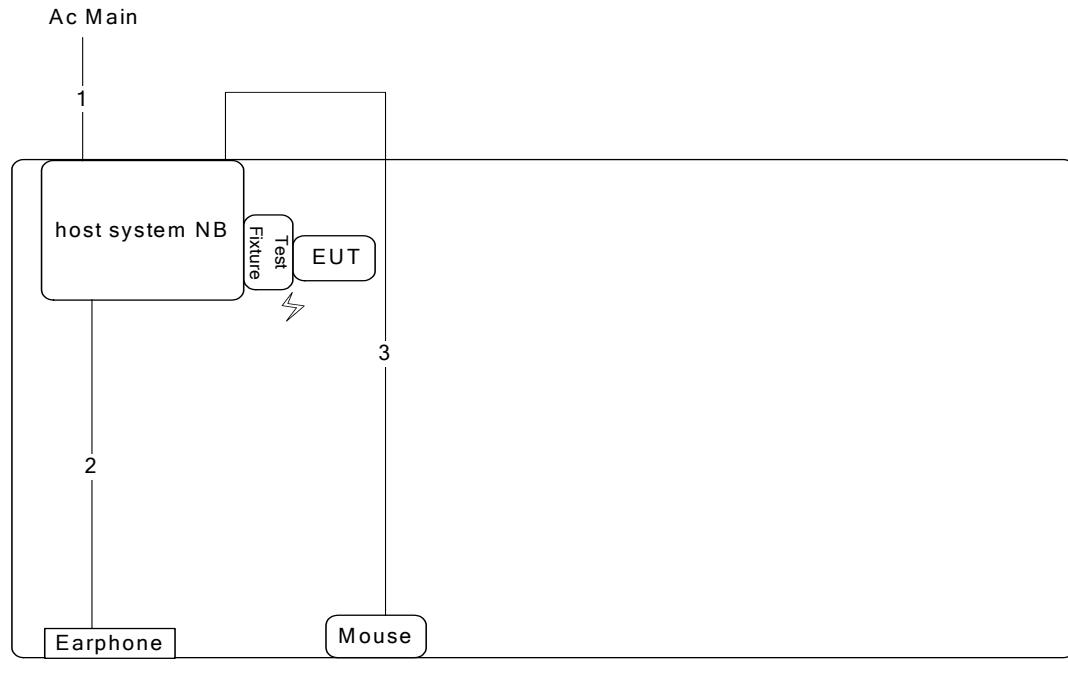

Item	Connection	Shield	Length
1	Power cable	No	2.6m
2	Audio cable	No	1.1m
3	USB cable	Yes	1.8m


### 3.9.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

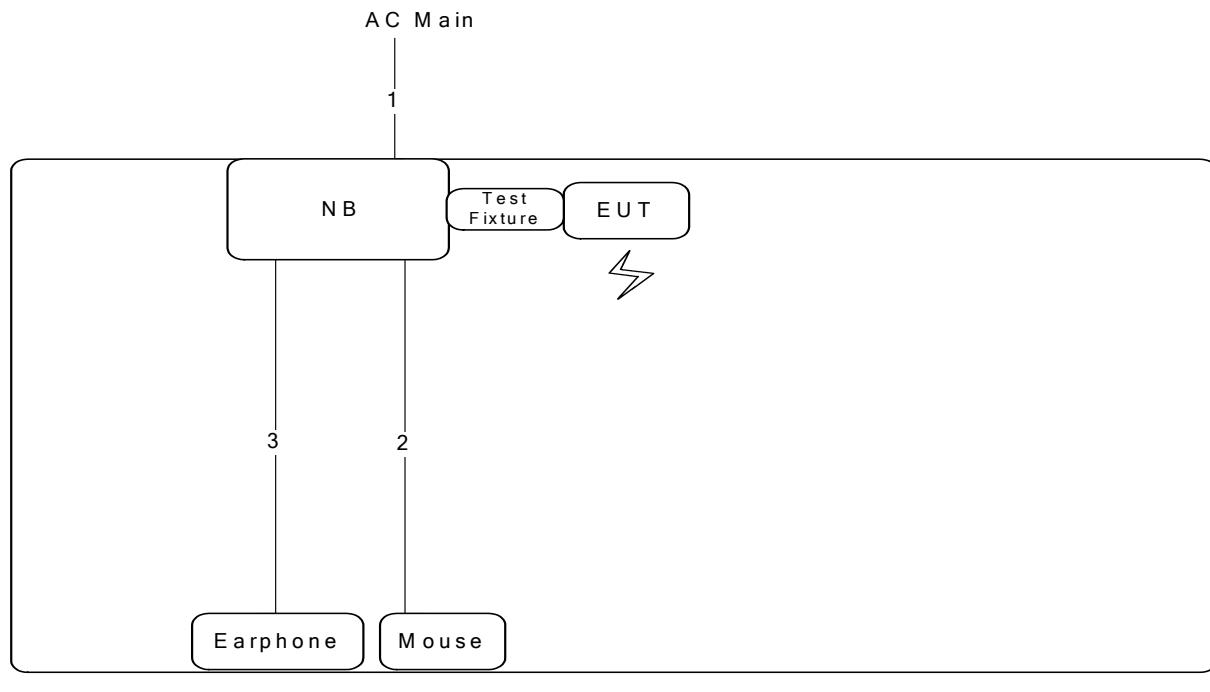

Item	Connection	Shield	Length
1	Power cable	No	2.6m
2	USB cable	Yes	1m
3	Audio cable	Yes	1m

Test Configuration: above 1GHz

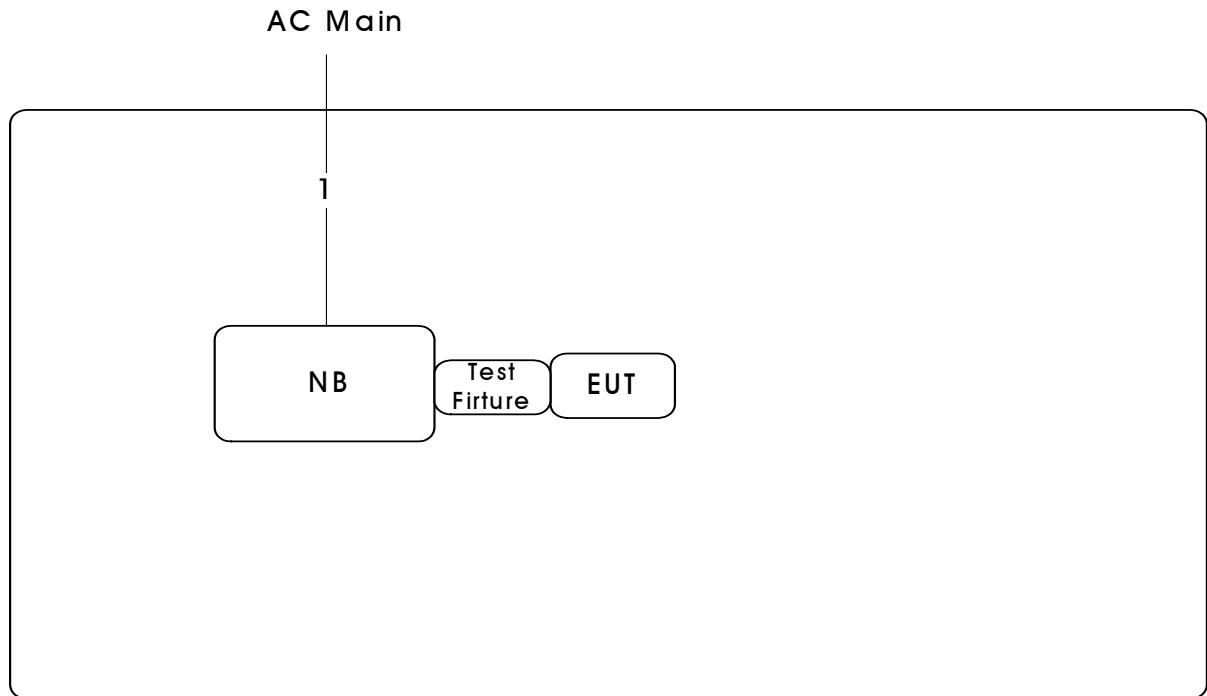

Item	Connection	Shield	Length
1	Power cable	No	2.6m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

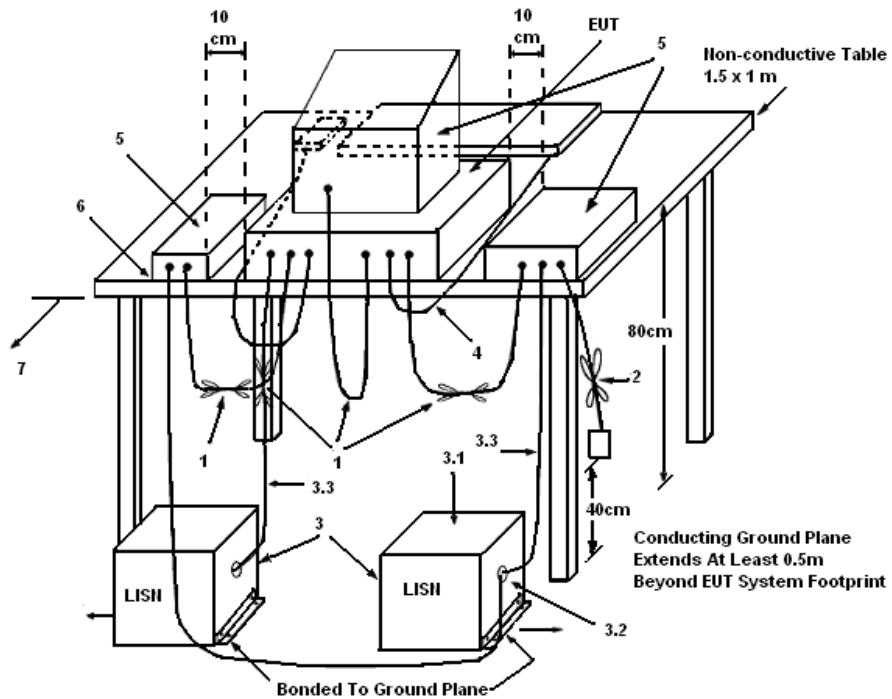

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	56%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

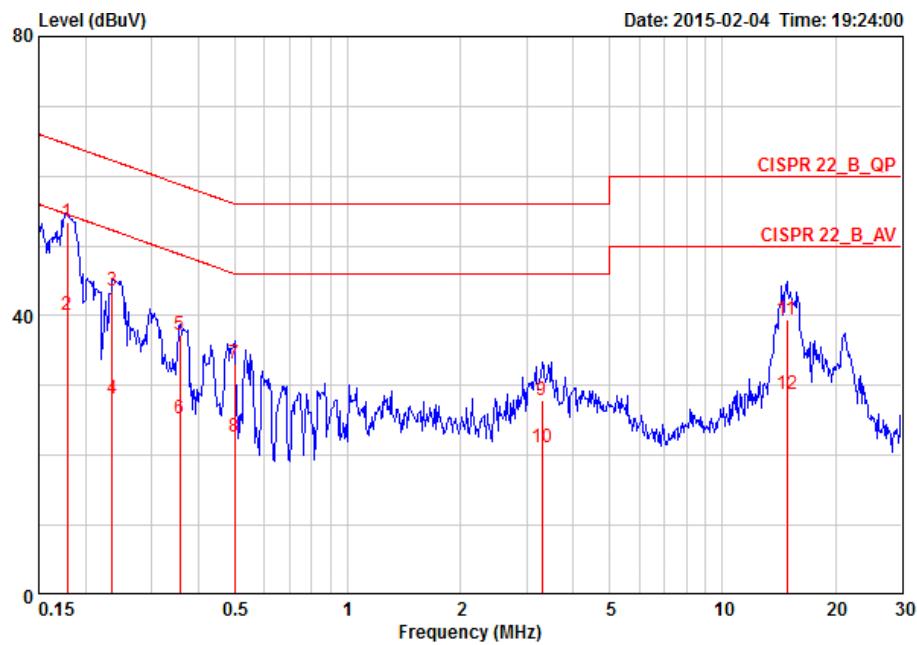

	Freq	Level	Over Limit	Limit	Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		dB		
1	0.17866	53.35	-11.20	64.55	43.09	10.03	0.23	QP	LINE	
2	0.17866	40.02	-14.53	54.55	29.76	10.03	0.23	AVERAGE	LINE	
3	0.23533	43.58	-18.68	62.26	33.29	10.03	0.26	QP	LINE	
4	0.23533	28.05	-24.21	52.26	17.76	10.03	0.26	AVERAGE	LINE	
5	0.35765	37.22	-21.56	58.78	26.90	10.03	0.29	QP	LINE	
6	0.35765	25.20	-23.58	48.78	14.88	10.03	0.29	AVERAGE	LINE	
7	0.49937	33.05	-22.96	56.01	22.72	10.03	0.31	QP	LINE	
8	0.49937	22.61	-23.40	46.01	12.28	10.03	0.31	AVERAGE	LINE	
9	3.293	27.88	-28.12	56.00	17.49	10.03	0.36	QP	LINE	
10	3.293	21.20	-24.80	46.00	10.81	10.03	0.36	AVERAGE	LINE	
11	14.828	39.53	-20.47	60.00	28.97	10.13	0.43	QP	LINE	
12	14.828	28.78	-21.22	50.00	18.22	10.13	0.43	AVERAGE	LINE	

<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Parody Lin	<b>Phase</b>	Neutral
<b>Configuration</b>	Normal Link	<b>Test Mode</b>	Mode 1

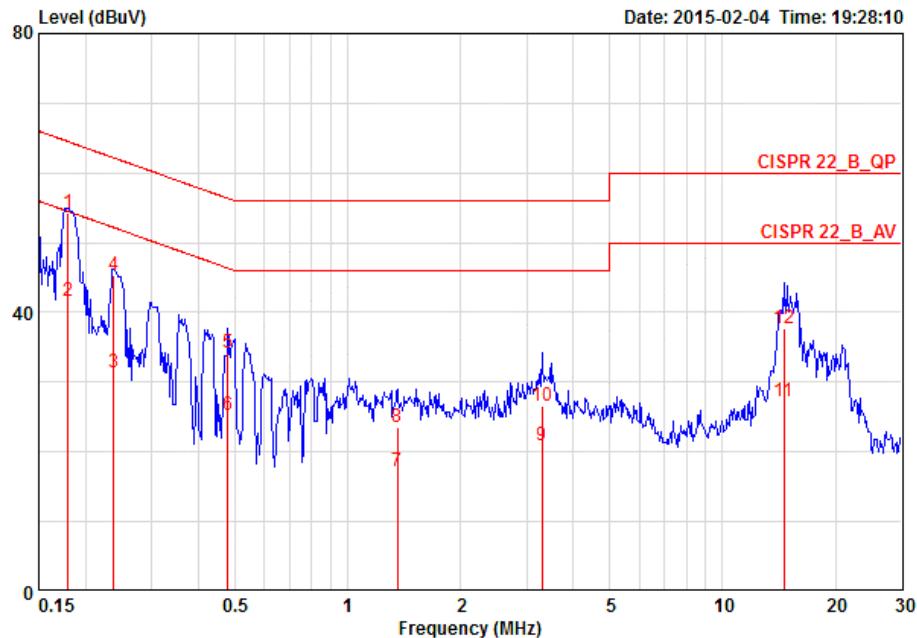

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase
		Line	Level	Factor	Loss	Remark	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 0	0.17961	54.34	-10.17	64.50	44.14	9.96	0.23 QP NEUTRAL
2	0.17961	41.74	-12.77	54.50	31.54	9.96	0.23 AVERAGE NEUTRAL
3	0.23784	31.48	-20.69	52.17	21.26	9.95	0.26 AVERAGE NEUTRAL
4	0.23784	45.31	-16.86	62.17	35.09	9.95	0.26 QP NEUTRAL
5	0.47865	34.19	-22.18	56.36	24.00	9.88	0.31 QP NEUTRAL
6	0.47865	25.39	-20.98	46.36	15.20	9.88	0.31 AVERAGE NEUTRAL
7	1.359	17.19	-28.81	46.00	6.96	9.89	0.34 AVERAGE NEUTRAL
8	1.359	23.51	-32.49	56.00	13.28	9.89	0.34 QP NEUTRAL
9	3.293	20.93	-25.07	46.00	10.68	9.89	0.36 AVERAGE NEUTRAL
10	3.293	26.66	-29.34	56.00	16.41	9.89	0.36 QP NEUTRAL
11	14.594	27.30	-22.70	50.00	16.90	9.97	0.43 AVERAGE NEUTRAL
12	14.594	37.74	-22.26	60.00	27.34	9.97	0.43 QP NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout



### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Denis Su	Configurations	IEEE 802.11n
Test Date	Mar. 26, 2013		

##### Configuration IEEE 802.11n MCS0 20MHz / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.68	30.00	Complies
6	2437 MHz	16.05	30.00	Complies
11	2462 MHz	13.57	30.00	Complies

##### Configuration IEEE 802.11n MCS0 40MHz / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	13.46	30.00	Complies
6	2437 MHz	16.12	30.00	Complies
9	2452 MHz	13.31	30.00	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Denis Su	<b>Configurations</b>	IEEE 802.11b/g
<b>Test Date</b>	Mar. 26, 2013		

**Configuration IEEE 802.11b / Chain 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.45	30.00	Complies
6	2437 MHz	16.59	30.00	Complies
11	2462 MHz	16.78	30.00	Complies

**Configuration IEEE 802.11g / Chain 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.25	30.00	Complies
6	2437 MHz	16.14	30.00	Complies
11	2462 MHz	14.74	30.00	Complies

## 4.3. Radiated Emissions Measurement

### 4.3.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.3.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.3.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

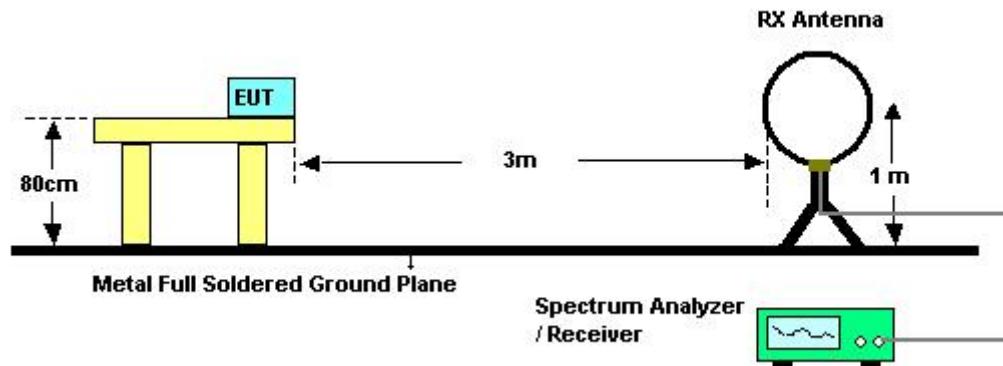

For Radiated Emissions: 30MHz~1GHz

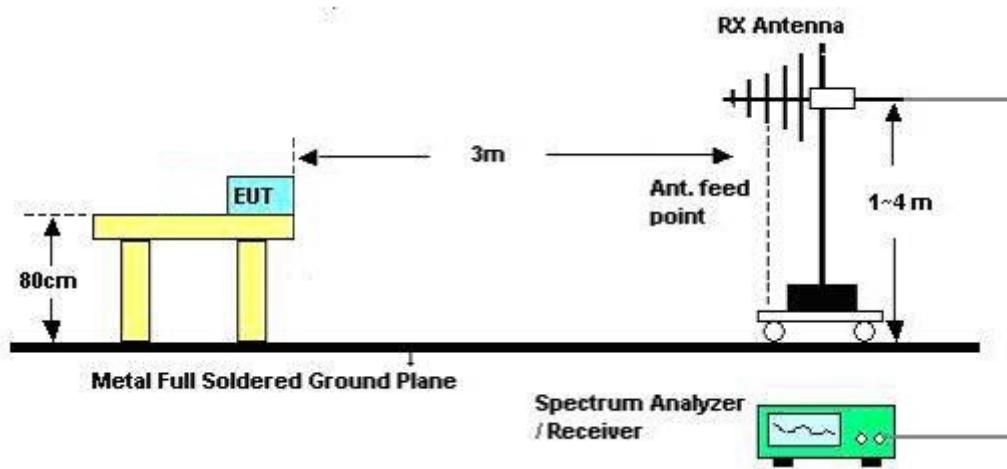

For Radiated Emissions: Above 1GHz

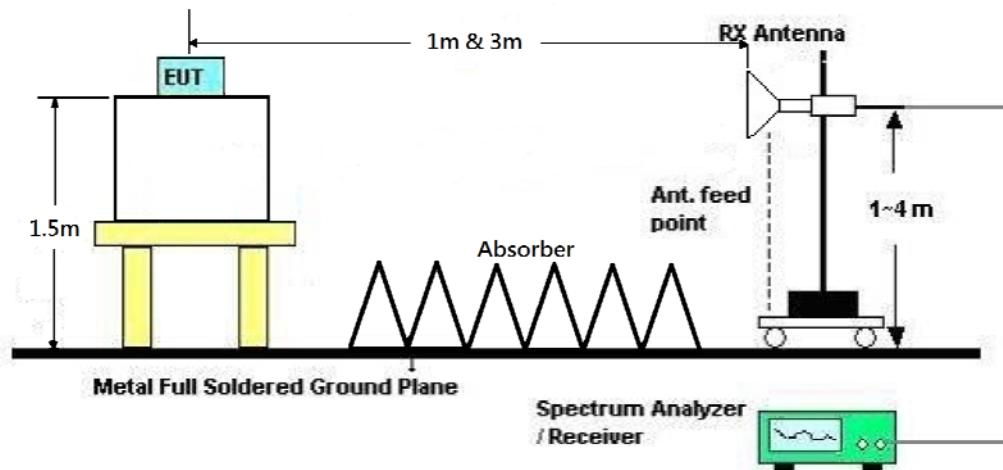

#### **4.3.5. Test Deviation**

There is no deviation with the original standard.

#### **4.3.6. EUT Operation during Test**

There is no deviation with the original standard.

#### 4.3.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	Normal Link
Test Date	Feb. 12, 2015	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.3.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	Normal Link
Test Mode	Mode 1		

##### Horizontal

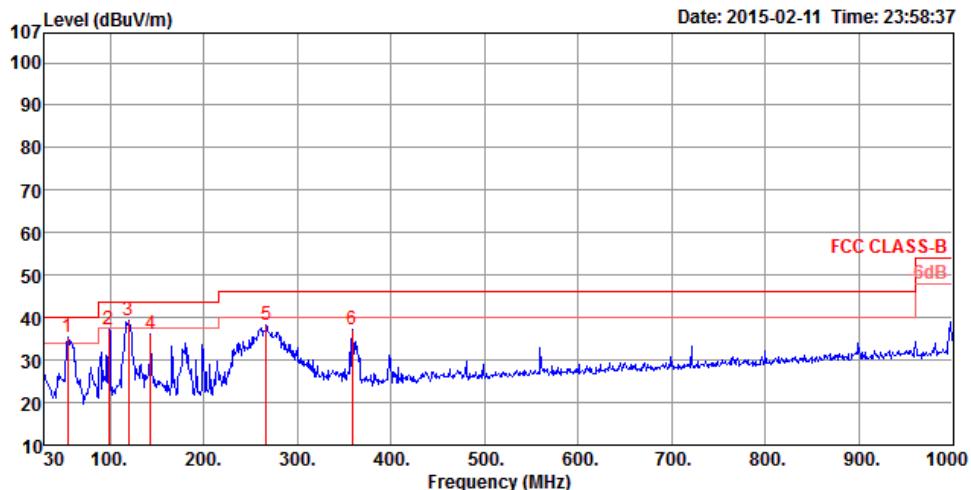

Freq	Level	Limit		Over Limit	Read	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		MHz	dBuV/m	Line	dB	dBuV	dB/m	dB	dB	cm	deg	
1	54.25	35.41	40.00	-4.59	59.13	8.02	0.76	32.50	400	288	HORIZONTAL	Peak
2	98.87	37.12	43.50	-6.38	57.69	10.98	0.98	32.45	300	190	HORIZONTAL	Peak
3	119.24	39.27	43.50	-4.23	57.91	12.67	1.10	32.41	300	322	HORIZONTAL	Peak
4	143.49	36.12	43.50	-7.38	55.57	11.71	1.21	32.37	200	148	HORIZONTAL	Peak
5	266.68	38.10	46.00	-7.90	55.15	13.77	1.62	32.44	100	204	HORIZONTAL	Peak
6	358.83	37.37	46.00	-8.63	52.34	15.52	1.88	32.37	125	326	HORIZONTAL	Peak

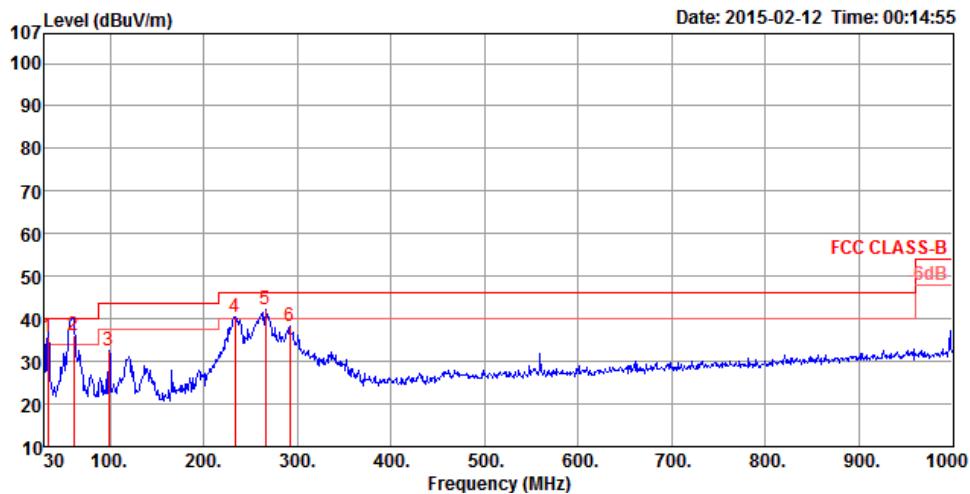**Vertical**


Freq	Level	Limit		Over	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit									
MHz	dBuV/m	dBuV/m										
1	33.55	35.85	40.00	-4.15	50.08	17.60	0.59	32.42	100	177	VERTICAL	QP
2	61.15	36.13	40.00	-3.87	61.04	6.80	0.79	32.50	285	6	VERTICAL	QP
3	98.87	32.70	43.50	-10.80	53.26	10.91	0.98	32.45	100	234	VERTICAL	Peak
4	233.70	40.50	46.00	-5.50	59.55	11.66	1.52	32.23	100	360	VERTICAL	Peak
5	265.71	42.33	46.00	-3.67	59.37	13.78	1.62	32.44	200	174	VERTICAL	Peak
6	291.90	38.31	46.00	-7.69	55.16	13.74	1.69	32.28	125	29	VERTICAL	Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.3.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	802.11b CH 1 / Chain 1
Test Date	Feb. 05, 2015		

## Horizontal

Freq	Level	Limit		Over Line	Read Limit	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			
1	4824.00	40.44	54.00	-13.56	36.00	7.05	33.70	31.09	HORIZONTAL	317	100	Average		
2	4824.19	48.34	74.00	-25.66	43.90	7.05	33.70	31.09	HORIZONTAL	317	100	Peak		

## Vertical

Freq	Level	Limit		Over Line	Read Limit	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm			
1	4823.87	48.51	74.00	-25.49	44.08	7.05	33.70	31.08	VERTICAL	254	124	Peak		
2	4823.99	40.25	54.00	-13.75	35.82	7.05	33.70	31.08	VERTICAL	254	124	Average		

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	802.11b CH 6 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m	deg	cm				
1	4873.96	47.53	74.00	-26.47	42.94	7.09	33.68	31.18	HORIZONTAL		317	100	Peak	
2	4873.97	37.78	54.00	-16.22	33.19	7.09	33.68	31.18	HORIZONTAL		317	100	Average	
3	7311.71	53.28	74.00	-20.72	42.36	8.86	34.00	36.06	HORIZONTAL		208	100	Peak	
4	7311.90	39.02	54.00	-14.98	28.10	8.86	34.00	36.06	HORIZONTAL		208	100	Average	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	dB/m	deg	cm				
1	4873.98	38.01	54.00	-15.99	33.42	7.09	33.68	31.18	VERTICAL		256	116	Average	
2	4874.08	47.68	74.00	-26.32	43.09	7.09	33.68	31.18	VERTICAL		256	116	Peak	
3	7311.12	52.96	74.00	-21.04	42.05	8.86	34.00	36.05	VERTICAL		219	100	Peak	
4	7311.83	39.07	54.00	-14.93	28.16	8.86	34.00	36.05	VERTICAL		219	100	Average	

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	802.11b CH 11 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB					
	MHz	dBuV/m	dBuV/m	dB	dBuV	deg	cm						
1	4924.01	33.26	54.00	-20.74	28.53	7.13	33.67	31.27	HORIZONTAL	314	100	Average	
2	4924.07	47.32	74.00	-26.68	42.59	7.13	33.67	31.27	HORIZONTAL	314	100	Peak	
3	7385.53	53.56	74.00	-20.44	42.48	8.92	34.07	36.23	HORIZONTAL	133	100	Peak	
4	7385.90	39.27	54.00	-14.73	28.19	8.92	34.07	36.23	HORIZONTAL	133	100	Average	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB					
	MHz	dBuV/m	dBuV/m	dB	dBuV	deg	cm						
1	4923.90	46.44	74.00	-27.56	41.70	7.13	33.67	31.28	VERTICAL	264	100	Peak	
2	4924.00	33.59	54.00	-20.41	28.85	7.13	33.67	31.28	VERTICAL	264	100	Average	
3	7386.72	54.71	74.00	-19.29	43.61	8.92	34.07	36.25	VERTICAL	192	100	Peak	
4	7386.90	40.05	54.00	-13.95	28.95	8.92	34.07	36.25	VERTICAL	192	100	Average	

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	802.11g CH 1 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Line	Read Limit	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB						
1	4823.25	32.22	54.00	-21.78	27.78	7.05	33.70	31.09	HORIZONTAL			165	100	Average
2	4824.73	46.17	74.00	-27.83	41.72	7.05	33.70	31.10	HORIZONTAL			165	100	Peak

**Vertical**

Freq	Level	Limit		Over Line	Read Limit	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB						
1	4821.81	31.98	54.00	-22.02	27.55	7.05	33.70	31.08	VERTICAL			165	107	Average
2	4822.86	46.27	74.00	-27.73	41.84	7.05	33.70	31.08	VERTICAL			165	107	Peak

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	802.11g CH 6 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m				
1	4872.39	46.81	74.00	-27.19	42.23	7.09	33.69	31.18	HORIZONTAL	309	104	Peak	
2	4872.41	33.25	54.00	-20.75	28.67	7.09	33.69	31.18	HORIZONTAL	309	104	Average	
3	7309.83	40.41	54.00	-13.59	29.50	8.86	34.00	36.05	HORIZONTAL	246	100	Average	
4	7313.22	53.52	74.00	-20.48	42.60	8.86	34.00	36.06	HORIZONTAL	246	100	Peak	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m				
1	4872.41	32.82	54.00	-21.18	28.24	7.09	33.69	31.18	VERTICAL	197	102	Average	
2	4873.42	46.04	74.00	-27.96	41.45	7.09	33.68	31.18	VERTICAL	197	102	Peak	
3	7310.65	55.01	74.00	-18.99	44.10	8.86	34.00	36.05	VERTICAL	262	105	Peak	
4	7312.06	40.46	54.00	-13.54	29.55	8.86	34.00	36.05	VERTICAL	262	105	Average	

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	802.11g CH 11 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dB	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm				
1	4924.13	32.28	54.00	-21.72	27.55	7.13	33.67	31.27	HORIZONTAL	184	116	Average	
2	4926.12	46.22	74.00	-27.78	41.49	7.13	33.67	31.27	HORIZONTAL	184	116	Peak	
3	7385.19	53.97	74.00	-20.03	42.89	8.92	34.07	36.23	HORIZONTAL	122	100	Peak	
4	7387.47	40.71	54.00	-13.29	29.62	8.92	34.07	36.24	HORIZONTAL	122	100	Average	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dB	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm				
1	4923.39	32.12	54.00	-21.88	27.41	7.13	33.67	31.25	VERTICAL	175	120	Average	
2	4925.66	45.62	74.00	-28.38	40.88	7.13	33.67	31.28	VERTICAL	175	120	Peak	
3	7385.21	53.44	74.00	-20.56	42.34	8.92	34.07	36.25	VERTICAL	148	105	Peak	
4	7387.20	40.76	54.00	-13.24	29.66	8.92	34.07	36.25	VERTICAL	148	105	Average	

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB			
MHz	dBuV/m	dBuV/m	dB						deg	cm	
1	4822.06	45.99	74.00	-28.01	41.55	7.05	33.70	31.09	HORIZONTAL	87	111 Peak
2	4823.33	32.40	54.00	-21.60	27.96	7.05	33.70	31.09	HORIZONTAL	87	111 Average

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB			
MHz	dBuV/m	dBuV/m	dB						deg	cm	
1	4824.01	46.50	74.00	-27.50	42.07	7.05	33.70	31.08	VERTICAL	161	115 Peak
2	4825.26	32.47	54.00	-21.53	28.00	7.06	33.70	31.11	VERTICAL	161	115 Average

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB			
1	4874.18	45.69	74.00	-28.31	41.10	7.09	33.68	31.18	HORIZONTAL	232	201 Peak
2	4876.13	32.39	54.00	-21.61	27.79	7.09	33.68	31.19	HORIZONTAL	232	201 Average
3	7310.42	53.45	74.00	-20.55	42.54	8.86	34.00	36.05	HORIZONTAL	144	138 Peak
4	7312.39	40.01	54.00	-13.99	29.09	8.86	34.00	36.06	HORIZONTAL	144	138 Average

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB			
1	4872.57	32.03	54.00	-21.97	27.45	7.09	33.69	31.18	VERTICAL	229	115 Average
2	4875.89	45.47	74.00	-28.53	40.88	7.09	33.68	31.18	VERTICAL	229	115 Peak
3	7309.98	53.38	74.00	-20.62	42.47	8.86	34.00	36.05	VERTICAL	229	115 Peak
4	7310.81	40.02	54.00	-13.98	29.11	8.86	34.00	36.05	VERTICAL	229	115 Average

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dBuV/m			dBuV	dB	dB						
1	4924.03	31.81	54.00	-22.19	27.08	7.13	33.67	31.27	HORIZONTAL		265	107	Average	
2	4926.33	44.94	74.00	-29.06	40.21	7.13	33.67	31.27	HORIZONTAL		265	107	Peak	
3	7387.54	54.57	74.00	-19.43	43.48	8.92	34.07	36.24	HORIZONTAL		259	120	Peak	
4	7387.78	40.30	54.00	-13.70	29.21	8.92	34.07	36.24	HORIZONTAL		259	120	Average	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dBuV/m			dBuV	dB	dB						
1	4923.99	46.22	74.00	-27.78	41.48	7.13	33.67	31.28	VERTICAL		276	101	Peak	
2	4924.43	32.03	54.00	-21.97	27.29	7.13	33.67	31.28	VERTICAL		276	101	Average	
3	7386.43	55.09	74.00	-18.91	43.99	8.92	34.07	36.25	VERTICAL		297	124	Peak	
4	7386.92	40.47	54.00	-13.53	29.37	8.92	34.07	36.25	VERTICAL		297	124	Average	

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m			
1	4842.44	32.53	54.00	-21.47	28.03	7.07	33.70	31.13	HORIZONTAL	268	107 Average
2	4845.35	45.53	74.00	-28.47	41.02	7.07	33.69	31.13	HORIZONTAL	268	107 Peak
3	7264.53	39.76	54.00	-14.24	28.94	8.83	33.96	35.95	HORIZONTAL	216	110 Average
4	7266.99	53.12	74.00	-20.88	42.30	8.83	33.96	35.95	HORIZONTAL	216	110 Peak

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable PreampAntenna			T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m			
1	4842.24	32.44	54.00	-21.56	27.94	7.07	33.70	31.13	VERTICAL	282	120 Average
2	4843.95	46.38	74.00	-27.62	41.88	7.07	33.70	31.13	VERTICAL	282	120 Peak
3	7263.91	53.12	74.00	-20.88	42.30	8.82	33.95	35.95	VERTICAL	238	143 Peak
4	7268.39	39.59	54.00	-14.41	28.77	8.83	33.96	35.95	VERTICAL	238	143 Average

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Line	Read Limit	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB						
1	4871.99	45.57	74.00	-28.43	40.99	7.09	33.69	31.18	HORIZONTAL		314	102	Peak	
2	4872.07	32.16	54.00	-21.84	27.58	7.09	33.69	31.18	HORIZONTAL		314	102	Average	
3	7309.11	52.93	74.00	-21.07	42.02	8.86	34.00	36.05	HORIZONTAL		255	115	Peak	
4	7310.26	39.97	54.00	-14.03	29.06	8.86	34.00	36.05	HORIZONTAL		255	115	Average	

**Vertical**

Freq	Level	Limit		Over Line	Read Limit	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB						
1	4872.56	31.91	54.00	-22.09	27.33	7.09	33.69	31.18	VERTICAL		215	133	Average	
2	4874.06	45.92	74.00	-28.08	41.33	7.09	33.68	31.18	VERTICAL		215	133	Peak	
3	7309.32	53.35	74.00	-20.65	42.44	8.86	34.00	36.05	VERTICAL		168	122	Peak	
4	7310.39	39.88	54.00	-14.12	28.97	8.86	34.00	36.05	VERTICAL		168	122	Average	

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1
Test Date	Feb. 05, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									deg	cm	
1	4903.58	31.98	54.00	-22.02	27.31	7.11	33.67	31.23	HORIZONTAL		223	103	Average	
2	4904.57	45.53	74.00	-28.47	40.85	7.11	33.67	31.24	HORIZONTAL		223	103	Peak	
3	7355.09	53.61	74.00	-20.39	42.59	8.90	34.04	36.16	HORIZONTAL		162	129	Peak	
4	7356.87	39.64	54.00	-14.36	28.62	8.90	34.04	36.16	HORIZONTAL		162	129	Average	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									deg	cm	
1	4902.83	45.43	74.00	-28.57	40.76	7.11	33.67	31.23	VERTICAL		191	100	Peak	
2	4905.23	32.07	54.00	-21.93	27.40	7.11	33.67	31.23	VERTICAL		191	100	Average	
3	7354.39	53.62	74.00	-20.38	42.61	8.90	34.04	36.15	VERTICAL		203	107	Peak	
4	7356.13	39.59	54.00	-14.41	28.58	8.90	34.04	36.15	VERTICAL		203	107	Average	

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.4. Emissions Measurement

### 4.4.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

### 4.4.3. Test Procedures

#### For Radiated band edges Measurement:

1. The test procedure is the same as section 4.3.3, only the frequency range investigated is limited to 100MHz around band edges.

#### For Conducted Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 v02 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit. Only worst data of each operating mode is presented.

#### **4.4.4. Test Setup Layout**

**For Radiated band edges Measurement:**

This test setup layout is the same as that shown in section 4.3.4.

**For Conducted Out of Band Emission Measurement:**

This test setup layout is the same as that shown in section 4.3.4.

#### **4.4.5. Test Deviation**

There is no deviation with the original standard.

#### **4.4.6. EUT Operation during Test**

There is no deviation with the original standard.

#### 4.4.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	802.11b CH 1, 6, 11 / Chain 1
Test Date	Feb. 04, 2015		

##### Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Preamp Factor	Antenna Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m				
1	2371.62	59.27	74.00	-14.73	27.38	4.90	0.00	26.99	HORIZONTAL	260	104	Peak	
2	2386.04	47.47	54.00	-6.53	15.53	4.91	0.00	27.03	HORIZONTAL	260	104	Average	
3	2411.04	106.66			74.63	4.94	0.00	27.09	HORIZONTAL	260	104	Peak	
4	2411.20	102.98			70.95	4.94	0.00	27.09	HORIZONTAL	260	104	Average	

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Preamp Factor	Antenna Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m				
1	2353.99	58.96	74.00	-15.04	27.13	4.88	0.00	26.95	HORIZONTAL	281	171	Peak	
2	2381.87	46.79	54.00	-7.21	14.86	4.91	0.00	27.02	HORIZONTAL	281	171	Average	
3	2436.36	103.05			70.94	4.96	0.00	27.15	HORIZONTAL	281	171	Average	
4	2437.96	106.81			74.69	4.97	0.00	27.15	HORIZONTAL	281	171	Peak	
5	2483.50	47.38	54.00	-6.62	15.11	5.01	0.00	27.26	HORIZONTAL	281	171	Average	
6	2486.71	60.00	74.00	-14.00	27.71	5.02	0.00	27.27	HORIZONTAL	281	171	Peak	

Item 3, 4 are the fundamental frequency at 2437 MHz.

##### Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable Loss Factor			Preamp Factor	Antenna Pol/Phase	T/Pos	A/Pos	Remark
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m				
1	2461.20	102.73			70.53	4.99	0.00	27.21	HORIZONTAL	275	167	Average	
2	2462.96	106.52			74.32	4.99	0.00	27.21	HORIZONTAL	275	167	Peak	
3	2486.84	60.80	74.00	-13.20	28.51	5.02	0.00	27.27	HORIZONTAL	275	167	Peak	
4	2488.76	48.03	54.00	-5.97	15.74	5.02	0.00	27.27	HORIZONTAL	275	167	Average	

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	802.11g CH 1, 6, 11 / Chain 1
Test Date	Feb. 04, 2015		

**Channel 1**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB						
MHz	dBuV/m	dBuV/m	dB									deg	cm	
1	2389.89	63.37	74.00	-10.63	31.42	4.91	0.00	27.04	HORIZONTAL	259	108	Peak		
2	2390.00	48.60	54.00	-5.40	16.64	4.92	0.00	27.04	HORIZONTAL	259	108	Average		
3	2408.15	105.23			73.22	4.93	0.00	27.08	HORIZONTAL	259	108	Peak		
4	2409.44	95.72			63.69	4.94	0.00	27.09	HORIZONTAL	259	108	Average		

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB						
MHz	dBuV/m	dBuV/m	dB									deg	cm	
1	2364.89	46.75	54.00	-7.25	14.88	4.89	0.00	26.98	HORIZONTAL	275	171	Average		
2	2374.18	59.22	74.00	-14.78	27.32	4.90	0.00	27.00	HORIZONTAL	275	171	Peak		
3	2430.59	107.02			74.92	4.96	0.00	27.14	HORIZONTAL	275	171	Peak		
4	2434.44	97.45			65.34	4.96	0.00	27.15	HORIZONTAL	275	171	Average		
5	2483.50	47.41	54.00	-6.59	15.14	5.01	0.00	27.26	HORIZONTAL	275	171	Average		
6	2533.80	60.58	74.00	-13.42	28.12	5.07	0.00	27.39	HORIZONTAL	275	171	Peak		

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dB			dBuV	dB	dB						
MHz	dBuV/m	dBuV/m	dB									deg	cm	
1	2459.44	95.55			63.36	4.99	0.00	27.20	HORIZONTAL	270	167	Average		
2	2464.72	105.16			72.95	4.99	0.00	27.22	HORIZONTAL	270	167	Peak		
3	2483.50	50.00	54.00	-4.00	17.73	5.01	0.00	27.26	HORIZONTAL	270	167	Average		
4	2483.64	63.62	74.00	-10.38	31.35	5.01	0.00	27.26	HORIZONTAL	270	167	Peak		

Item 1, 2 are the fundamental frequency at 2462 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	26°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Eddie Weng	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1
<b>Test Date</b>	Feb. 04, 2015		

### Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dBuV/m			dBuV	dB	dB/m						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm			
1	2390.00	48.56	54.00	-5.44	16.60	4.92	0.00	27.04	HORIZONTAL	261	105	Average		
2	2390.00	65.68	74.00	-8.32	33.72	4.92	0.00	27.04	HORIZONTAL	261	105	Peak		
3	2407.19	104.79			72.78	4.93	0.00	27.08	HORIZONTAL	261	105	Peak		
4	2408.80	94.93			62.91	4.94	0.00	27.08	HORIZONTAL	261	105	Average		

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dBuV/m			dBuV	dB	dB/m						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm			
1	2362.96	58.81	74.00	-15.19	26.95	4.89	0.00	26.97	HORIZONTAL	281	199	Peak		
2	2388.28	46.82	54.00	-7.18	14.88	4.91	0.00	27.03	HORIZONTAL	281	199	Average		
3	2444.37	106.57			74.43	4.97	0.00	27.17	HORIZONTAL	281	199	Peak		
4	2445.01	96.92			64.78	4.97	0.00	27.17	HORIZONTAL	281	199	Average		
5	2483.50	47.47	54.00	-6.53	15.20	5.01	0.00	27.26	HORIZONTAL	281	199	Average		
6	2531.23	60.50	74.00	-13.50	28.06	5.06	0.00	27.38	HORIZONTAL	281	199	Peak		

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
		Line	dBuV/m			dBuV	dB	dB/m						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm			
1	2458.80	104.07			71.88	4.99	0.00	27.20	HORIZONTAL	269	167	Peak		
2	2465.05	94.03			61.82	4.99	0.00	27.22	HORIZONTAL	269	167	Average		
3	2483.50	48.83	54.00	-5.17	16.56	5.01	0.00	27.26	HORIZONTAL	269	167	Average		
4	2484.12	64.64	74.00	-9.36	32.37	5.01	0.00	27.26	HORIZONTAL	269	167	Peak		

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Eddie Weng	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1
Test Date	Feb. 04, 2015		

**Channel 3**

Freq	Level	Limit		Read Level	Cable Loss Factor			Preamp Factor	Antenna Pol/Phase	T/Pos	A/Pos	Remark
		Line	Over Limit		dB	dBuV	dB					
MHz	dBuV/m	dBuV/m								deg	cm	
1	2386.10	62.74	74.00	-11.26	30.80	4.91	0.00	27.03	HORIZONTAL	272	203	Peak
2	2390.00	48.09	54.00	-5.91	16.13	4.92	0.00	27.04	HORIZONTAL	272	203	Average
3	2427.45	91.44			59.36	4.95	0.00	27.13	HORIZONTAL	272	203	Average
4	2432.58	101.73			69.63	4.96	0.00	27.14	HORIZONTAL	272	203	Peak

Item 3, 4 are the fundamental frequency at 2422 MHz.

**Channel 6**

Freq	Level	Limit		Read Level	Cable Loss Factor			Preamp Factor	Antenna Pol/Phase	T/Pos	A/Pos	Remark
		Line	Over Limit		dB	dBuV	dB					
MHz	dBuV/m	dBuV/m								deg	cm	
1	2388.92	60.93	74.00	-13.07	28.98	4.91	0.00	27.04	HORIZONTAL	276	201	Peak
2	2390.00	48.78	54.00	-5.22	16.82	4.92	0.00	27.04	HORIZONTAL	276	201	Average
3	2446.30	94.27			62.13	4.97	0.00	27.17	HORIZONTAL	276	201	Average
4	2447.26	104.74			72.58	4.98	0.00	27.18	HORIZONTAL	276	201	Peak
5	2483.50	52.12	54.00	-1.88	19.85	5.01	0.00	27.26	HORIZONTAL	276	201	Average
6	2483.50	66.14	74.00	-7.86	33.87	5.01	0.00	27.26	HORIZONTAL	276	201	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 9**


Freq	Level	Limit		Read Level	Cable Loss Factor			Preamp Factor	Antenna Pol/Phase	T/Pos	A/Pos	Remark
		Line	Over Limit		dB	dBuV	dB					
MHz	dBuV/m	dBuV/m								deg	cm	
1	2461.30	91.46			59.26	4.99	0.00	27.21	HORIZONTAL	275	167	Average
2	2462.58	101.73			69.53	4.99	0.00	27.21	HORIZONTAL	275	167	Peak
3	2483.50	50.39	54.00	-3.61	18.12	5.01	0.00	27.26	HORIZONTAL	275	167	Average
4	2483.50	65.41	74.00	-8.59	33.14	5.01	0.00	27.26	HORIZONTAL	275	167	Peak

Item 1, 2 are the fundamental frequency at 2452 MHz.


**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

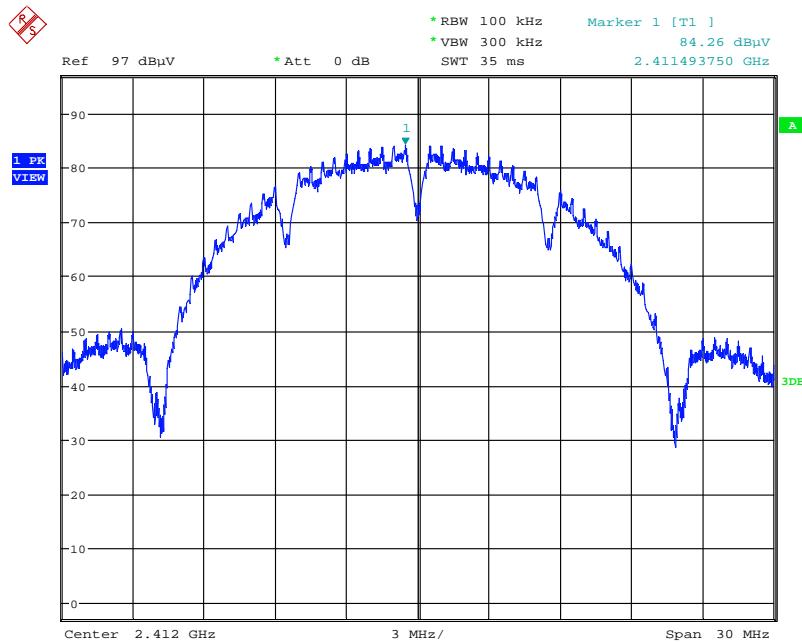
**For Emission not in Restricted Band**
**Plot on Configuration IEEE 802.11b / Reference Level**


Date: 5.FEB.2015 02:00:31

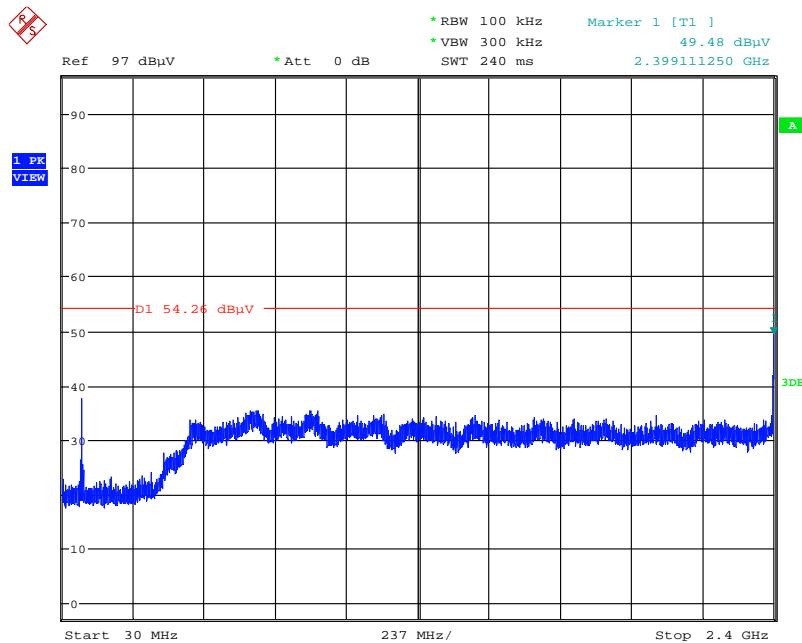**Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)**


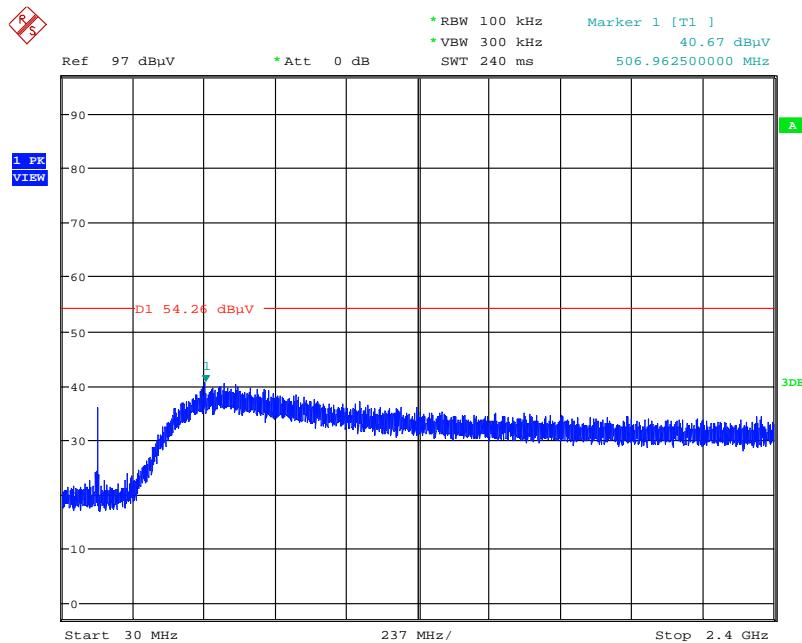
Date: 5.FEB.2015 02:01:32

### Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

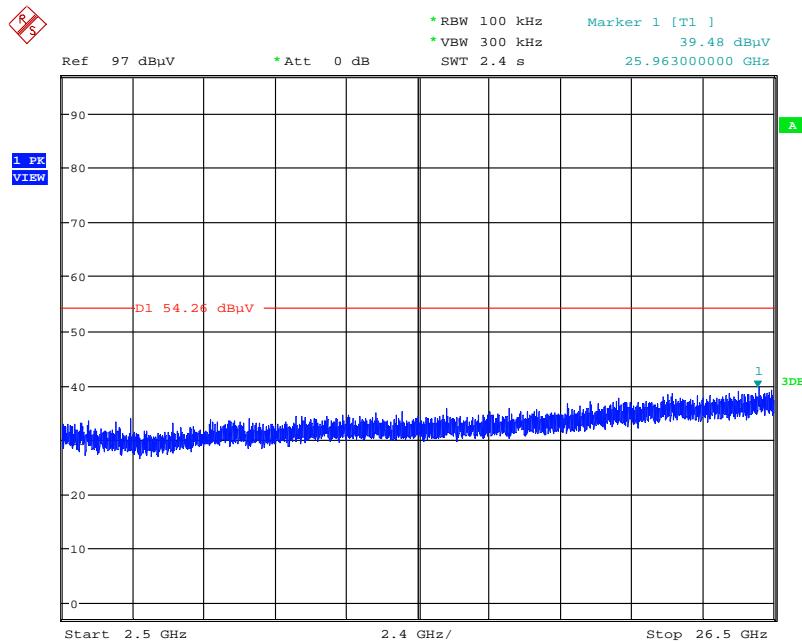


Date: 5.FEB.2015 02:02:26

### Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)




Date: 5.FEB.2015 02:03:29

**Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)**

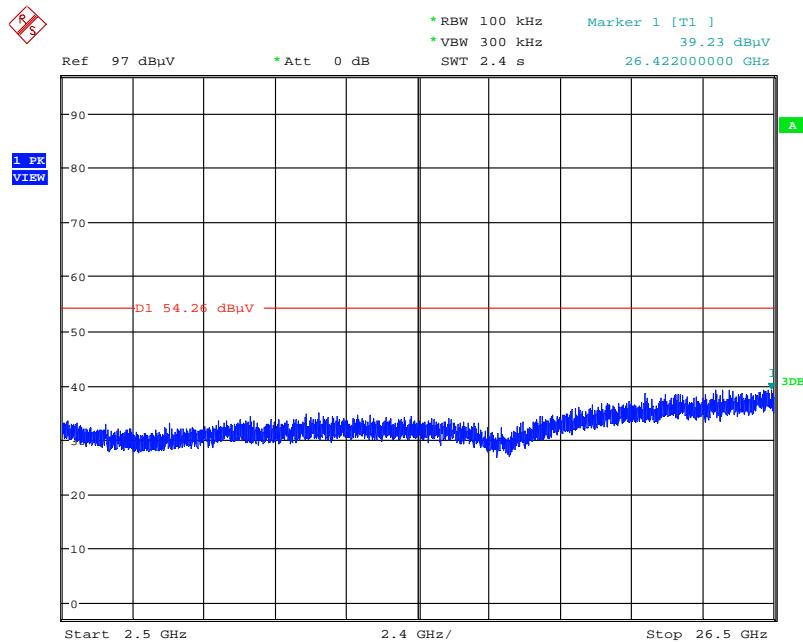


Date: 5.FEB.2015 02:03:08


### Plot on Configuration IEEE 802.11g / Reference Level

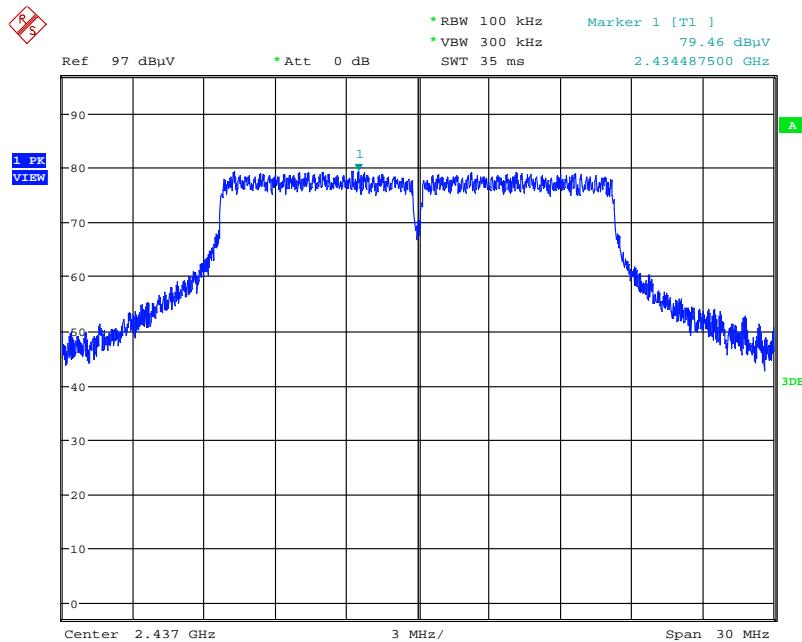

### Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

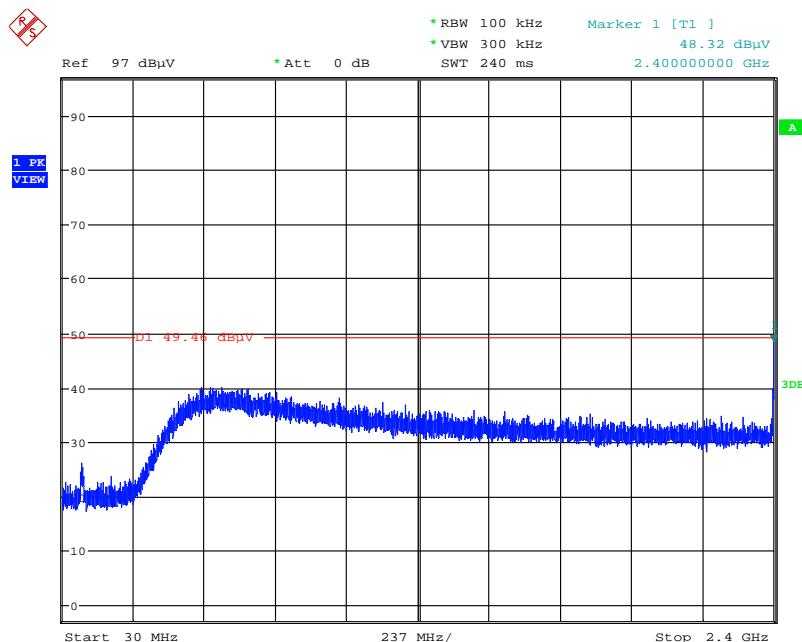


### Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

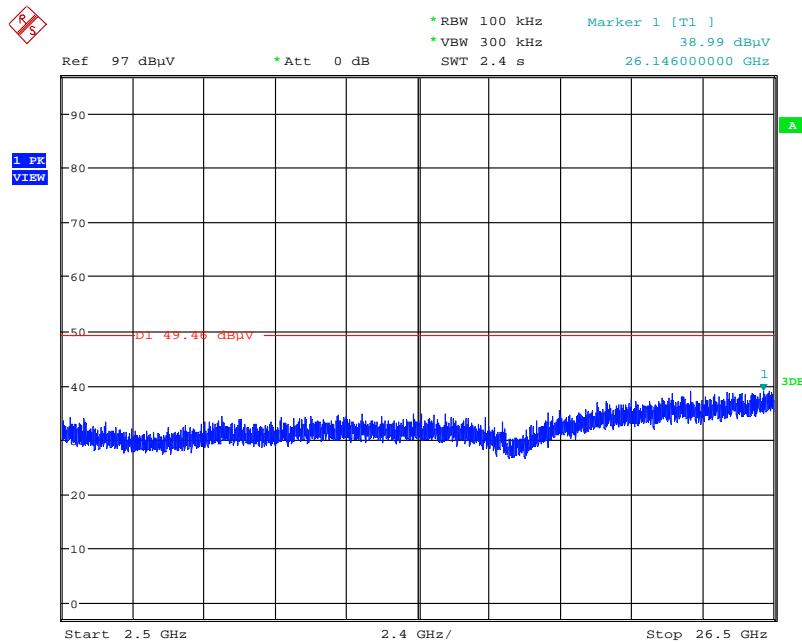


Date: 5.FEB.2015 02:07:11

### Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

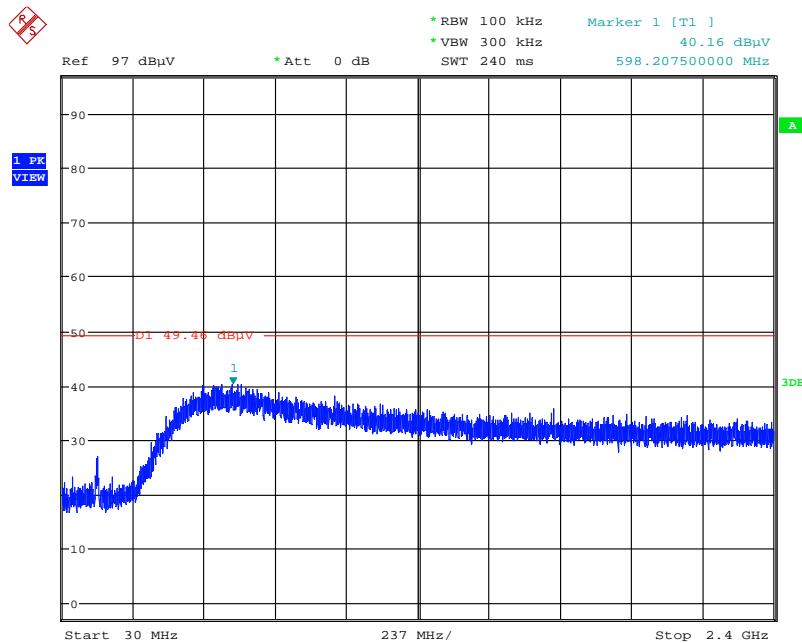


Date: 5.FEB.2015 02:08:25

**Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)**

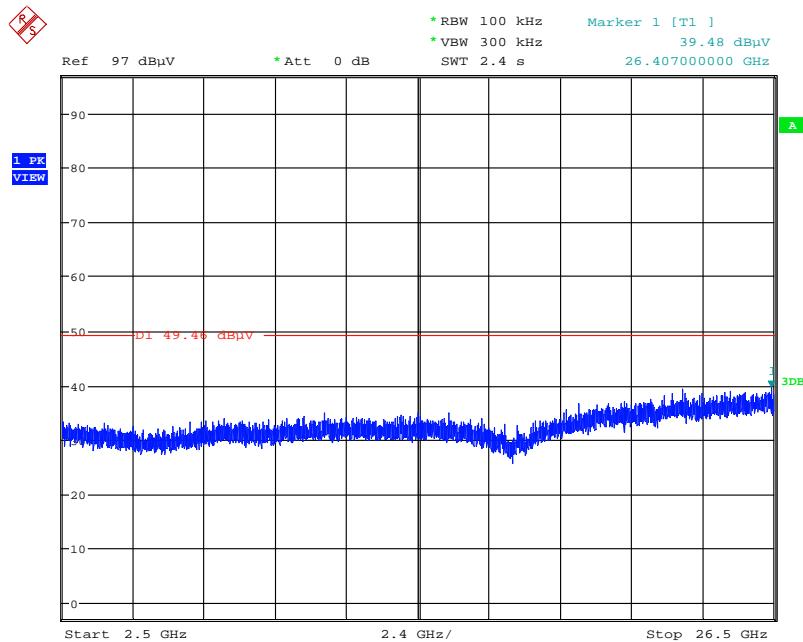


Date: 5.FEB.2015 02:08:06

**Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level**

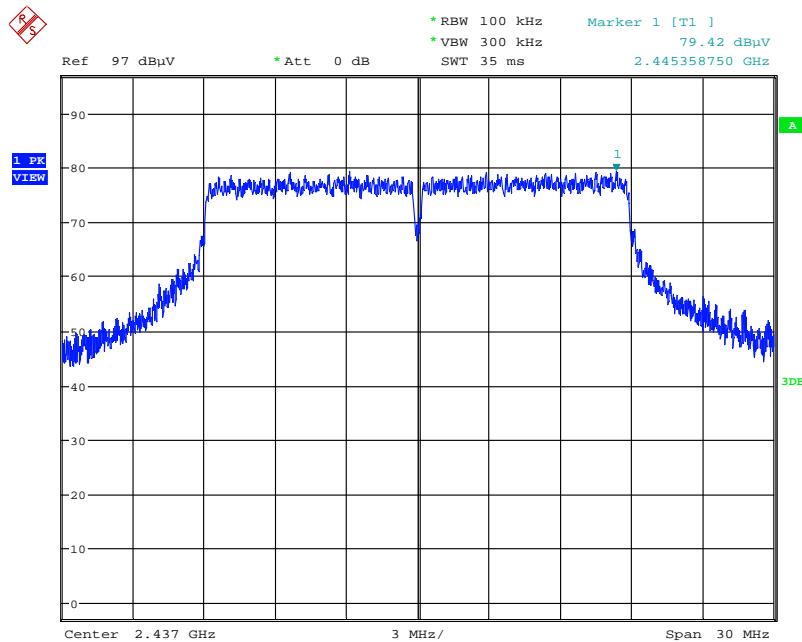


Date: 5.FEB.2015 02:09:59

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)**

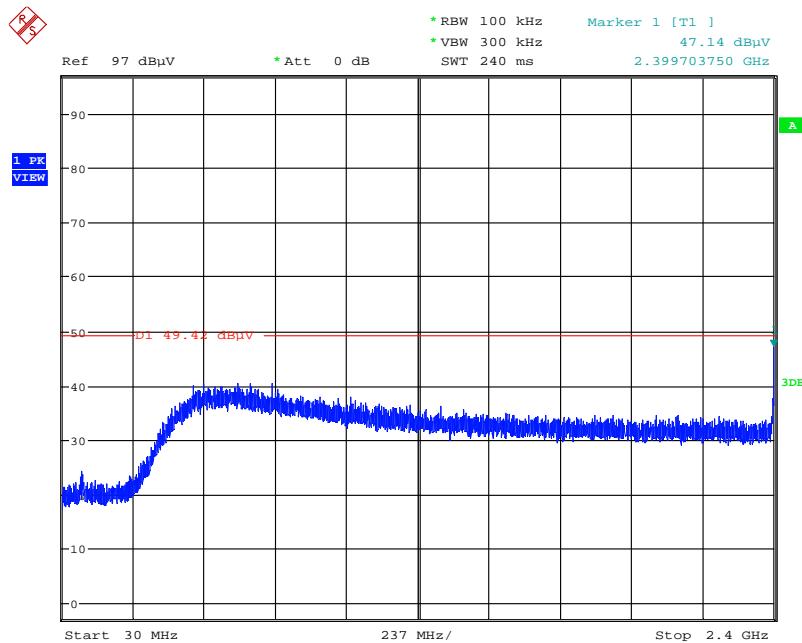


Date: 5.FEB.2015 02:10:50

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

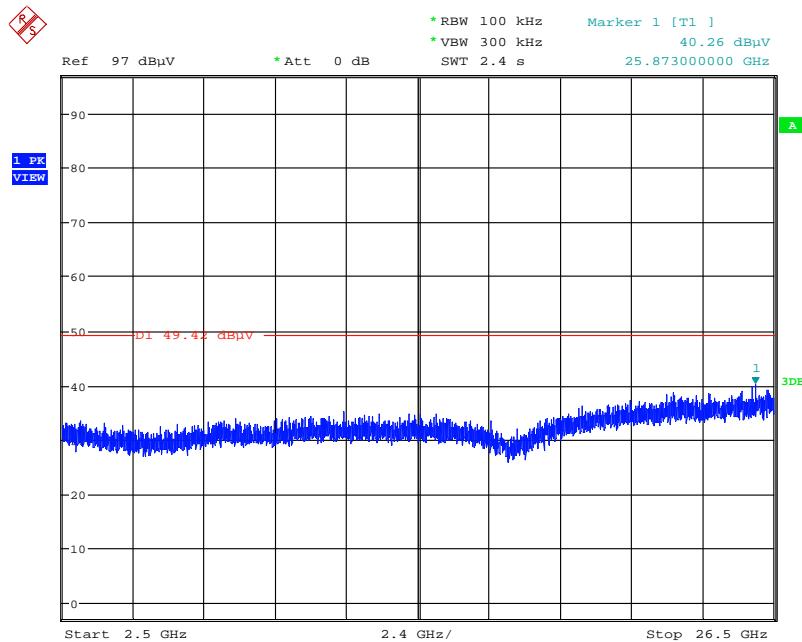


Date: 5.FEB.2015 02:11:15

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

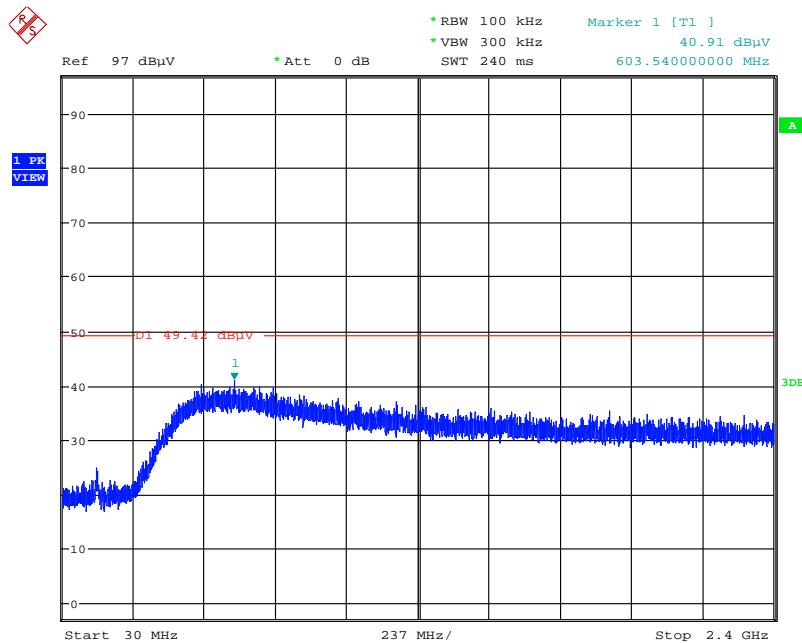


Date: 5.FEB.2015 02:12:10

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)**

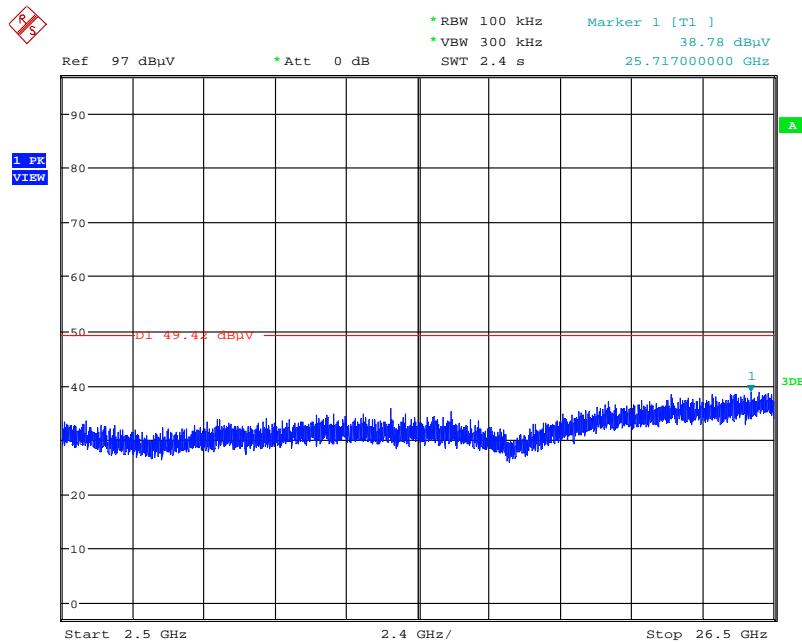


Date: 5.FEB.2015 02:11:49

### Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

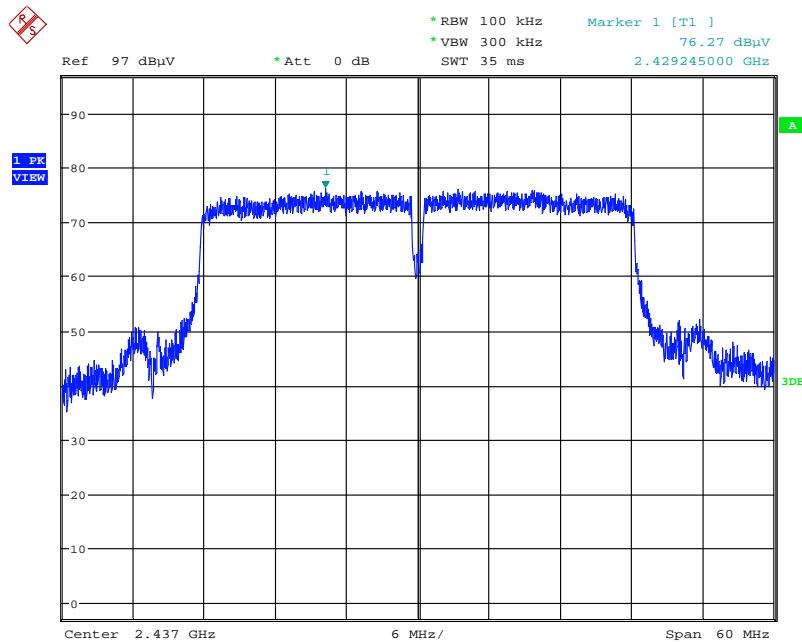


Date: 5.FEB.2015 02:13:41

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

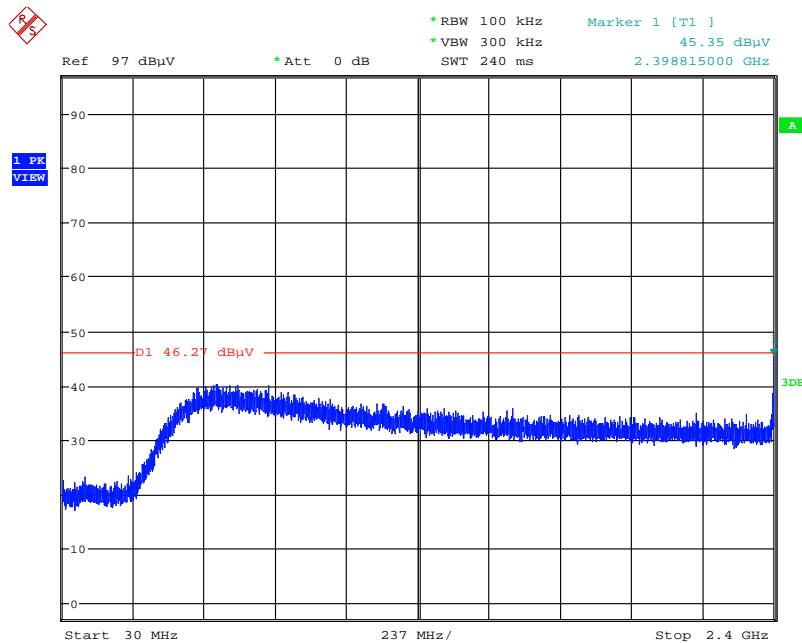


Date: 5.FEB.2015 02:14:32

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

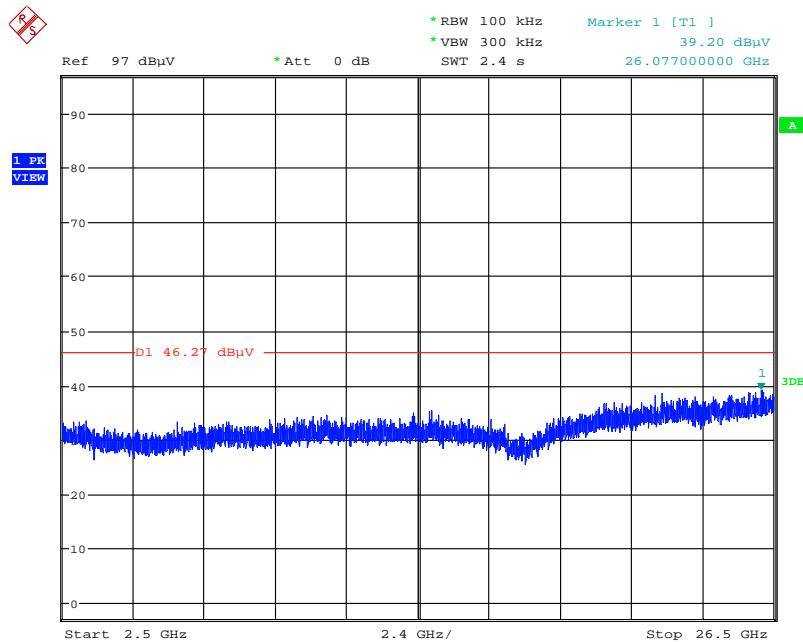


Date: 5.FEB.2015 02:15:09

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

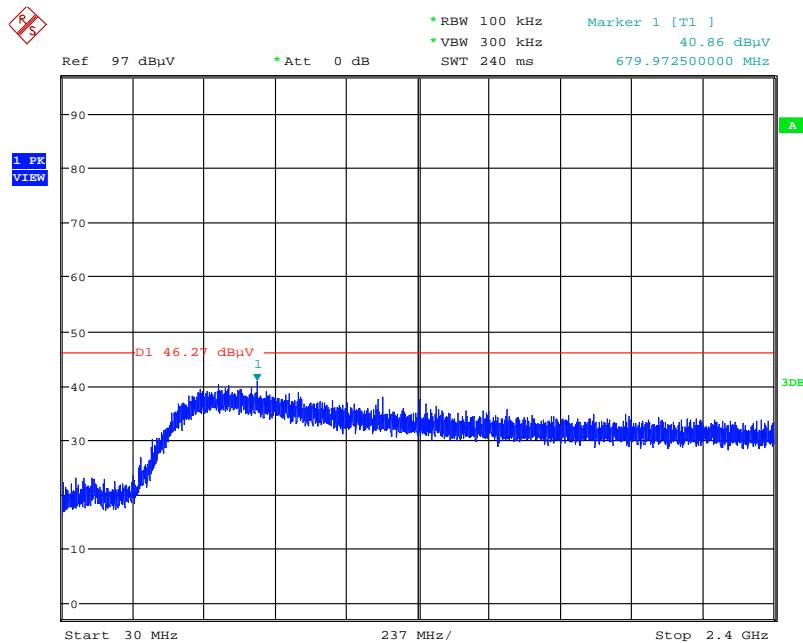

Date: 5.FEB.2015 02:16:12

**Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)**

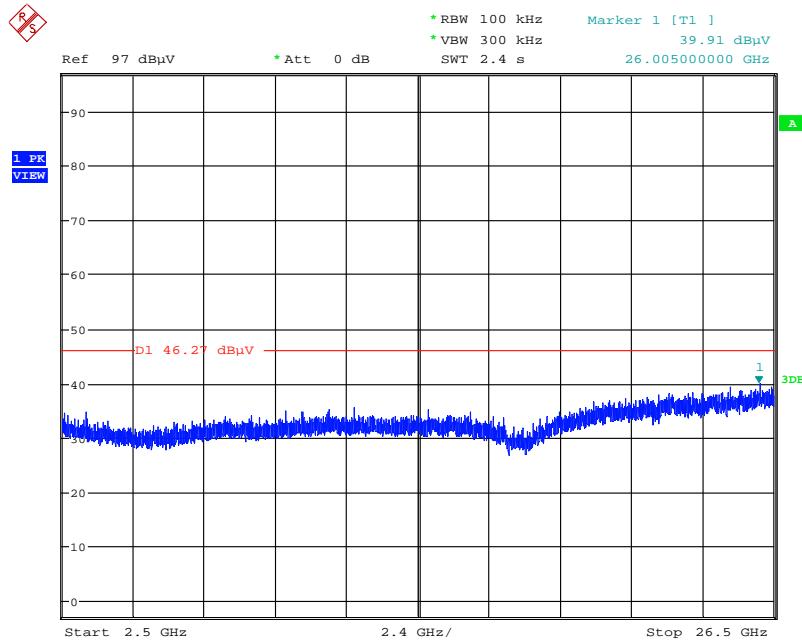

Date: 5.FEB.2015 02:15:52

## 4.5. Antenna Requirements

### 4.5.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.5.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Jan. 21, 2015	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESR26	101289	9kHz ~ 26GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m ~ 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%