

## **SPORTON International Inc.**

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

# **FCC RADIO TEST REPORT**

Applicant's company	Realtek Semiconductor Corp.	
Applicant Address	No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan	
FCC ID	TX2-RTL8723BS	
Manufacturer's company	Realtek Semiconductor Corp.	
Manufacturer Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan	

Product Name	802.11b/g/n RTL8723BS Combo module	
Brand Name	REALTEK	
Model Name	RTL8723BS	
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247	
Test Freq. Range	2402 ~ 2480MHz	
Received Date	Mar. 17, 2014	
Final Test Date	Apr. 19, 2014	
Submission Type	Original Equipment	

### Statement

#### Test result included is only for the Bluetooth LE of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C and KDB 558074 D01 v03r01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





# **Table of Contents**

1.	CERT	FICATE OF COMPLIANCE	1
2.	SUMN	MARY OF THE TEST RESULT	2
3.	GENE	RAL INFORMATION	з
	3.1.	Product Details	3
	3.2.	Accessories	3
	3.3.	Table for Filed Antenna	4
	3.4.	Table for Carrier Frequencies	5
	3.5.	Table for Test Modes	5
	3.6.	Table for Testing Locations	6
	3.7.	Table for Supporting Units	6
	3.8.	Table for Parameters of Test Software Setting	7
	3.9.	EUT Operation during Test	7
	3.10.	Duty Cycle	7
	3.11.	Test Configurations	8
4.	TEST F	result	11
	4.1.	AC Power Line Conducted Emissions Measurement	11
	4.2.	Maximum Conducted Output Power Measurement	15
	4.3.	Power Spectral Density Measurement	17
	4.4.	6dB Spectrum Bandwidth Measurement	20
	4.5.	Radiated Emissions Measurement	22
	4.6.	Emissions Measurement	32
	4.7.	Antenna Requirements	38
5.	LIST C	PF MEASURING EQUIPMENTS	39
6.	MEAS	UREMENT UNCERTAINTY	41
AF	PPEND	IX A. TEST PHOTOS	<b>8</b> A
AF	PEND	IX B. MAXIMUM PERMISSIBLE EXPOSURE	вз
		IX C. RADIATED EMISSION CO-LOCATION REPORT	
		IX D. ANTENNA LIST	-

Issued Date : Apr. 24, 2014



# History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR431858AC	Rev. 01	Initial issue of report	Apr. 24, 2014

Issued Date : Apr. 24, 2014



Certificate No.: CB10304103

### 1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11b/g/n RTL8723BS Combo module

Brand Name : REALTEK

Model No. : RTL8723BS

Applicant: Realtek Semiconductor Corp.

Test Rule Part(s): 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 17, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Sam Chen

SPORTON INTERNATIONAL INC.

Report Format Version: Rev. 01
FCC ID: TX2-RTL8723BS

Page No. : 1 of 43 Issued Date : Apr. 24, 2014



## 2. SUMMARY OF THE TEST RESULT

	Applied Standard: 47 CFR FCC Part 15 Subpart C					
Part	Rule Section	Result	Under Limit			
4.1	15.207	AC Power Line Conducted Emissions	Complies	12.78 dB		
4.2	15.247(b)(3)	5.247(b)(3) Maximum Conducted Output Power		24.91 dB		
4.3	15.247(e)	Power Spectral Density	Complies	19.27 dB		
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-		
4.5	4.5 15.247(d) Radiated Emissions		Complies	3.17 dB		
4.6	15.247(d) Band Edge Emissions		Complies	9.39 dB		
4.7	15.203	Antenna Requirements	Complies	-		

Page No. : 2 of 43

Issued Date : Apr. 24, 2014



## 3. GENERAL INFORMATION

## 3.1. Product Details

Items	Description
Power Type	From host system
Modulation	DSSS
Data Rate (Mbps)	GFSK: 1
Frequency Range	2402 ~ 2480MHz
Channel Number	40 (37 hopping + 3 advertising channel)
Channel Band Width (99%)	1.072 MHz
Maximum Conducted Output Power	5.09 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

### 3.2. Accessories

N/A

Report Format Version: Rev. 01 Page No. : 3 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014




### 3.3. Table for Filed Antenna

Ant.	it. Brand Model Name		Antenna Type	Connector	Gain (dBi)
1	LYNwave	ALA110-222050-30001	PIFA Antenna	IPEX MHF4	3.5

Note: There are three configurations for EUT

Configuration	Antenna	Description
Configuration	Chain	
		The EUT supports the antenna with TX/RX diversity function for WLAN and
		Bluetooth. (Ex. Assume chain 1 was selected to conduct transmitting
		function in WLAN, so chain 2 was selected in Bluetooth Mode. Vice
		versa.)
Config 1 Divorcity	2 chains	WLAN-802.11bgn(1TX, 1RX) / Bluetooth (1TX, 1RX)
Config.1 Diversity	2 Chairis	The EUT supports 1TX/1RX function, and it supports TX/RX diversity
		function.
		Both chain 1 and chain 2 could be used as transmitting/receiving
		antenna, but only one of them could transmit/receive at the same
		time.
		WLAN-802.11bgn(1TX, 1RX) / Bluetooth (1TX, 1RX)
Config.2 Fixed	2 chains	Chain 1 is designated for WLAN function, Chain 2 is designated for
		Bluetooth Functions.
		WLAN-802.11bgn(1TX, 1RX) / Bluetooth (1TX, 1RX)
Config.3 Single	1 chain	WLAN and BT share a common chain, but only one of them could
		transmit/receive at the same time.

After evaluating, configuration 1 has been evaluated to be the worst case, so it was performed for test. Chain 1 generated the worst case in configuration 1, so it was selected to test and record in the report.

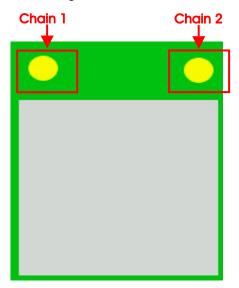

Report Format Version: Rev. 01 Page No. : 4 of 43 FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014



#### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
	0	2402 MHz	20	2442 MHz
	1	2404 MHz	:	:
2400~2483.5MHz	2	2406 MHz	37	2476 MHz
	:	:	38	2478 MHz
	18	2438 MHz	39	2480 MHz
	19	2440 MHz	-	-

#### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	GFSK	1 Mbps	0/20/39	1
Power Spectral Density				
6dB Spectrum Bandwidth	GFSK	1 Mbps	0/20/39	1
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup>	GFSK	1 Mbps	0/20/39	1
Harmonic				
Band Edge Emissions	GFSK	1 Mbps	0/20/39	1

The following test modes were performed for all tests:

#### For Conducted Emission test:

Mode 1. WiFi function

Mode 2. Bluetooth function

Mode 1 is the worst case, so it was selected to record in this test report.

#### For Radiated Emission below 1GHz test:

Mode 1. Laying of EUT + WiFi function

Mode 2. Stand of EUT + WiFi function

Mode 1 has been evaluated to be the worst case among Mode  $1\sim2$ , thus measurement for Mode 3 will follow this same test mode

Mode 3. Laying of EUT + Bluetooth function

Mode 1 has been evaluated to be the worst case among Mode  $1\sim3$ , so it was selected to record in this test report.

#### For Radiated Emission above 1GHz test:

There are two modes of EUT, one is stand of EUT, and the other is laying of EUT.

After evaluating, laying of EUT has been evaluated to be the worst case.

Consequently, measurement for Radiated Emission above 1GHz test will follow this same test mode.

Mode 1. Laying of EUT

 Report Format Version: Rev. 01
 Page No.
 : 5 of 43

 FCC ID: TX2-RTL8723BS
 Issued Date
 : Apr. 24, 2014



#### For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and Bluetooth function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and Bluetooth function.

### 3.6. Table for Testing Locations

	Test Site Location						
Address:	ddress: No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.						
TEL:	886-3-	886-3-656-9065					
FAX:	886-3-656-9085						
Test Site	No.	Site Category	Location	FCC Reg. No.	IC File No.		
03CH01-CB		SAC	Hsin Chu	262045	IC 4086D		
CO01-CB		Conduction	Hsin Chu	262045	IC 4086D		
TH01-CB		OVEN Room	Hsin Chu	-	-		

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Mouse	Logitech	M-U0026	DoC
Earphone	E-BOOKI	E-EPC040	N/A
Test fixture	Realtek	NGFF Adapter	N/A
AP Router	Planex	GW-AP54SGX	KA220030603014-1

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID		
Notebook	DELL	E6430	DoC		
Mouse	Logitech	M-U0026	DoC		
Earphone	SHYARO CHI	MIC-04	N/A		
Test fixture	Realtek	NGFF Adapter	N/A		
AP Router	Planex	GW-AP54SGX	KA220030603014-1		

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Test fixture	Realtek	NGFF Adapter	N/A

Report Format Version: Rev. 01 Page No. : 6 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.


#### **Power Parameters:**

Test Software Version	RTK_BT_MP v3.19.2014.1					
Frequency	2402 MHz	2442 MHz	2480 MHz			
Power Parameters	5/0x11	5/0x11	5/0x11			

### 3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

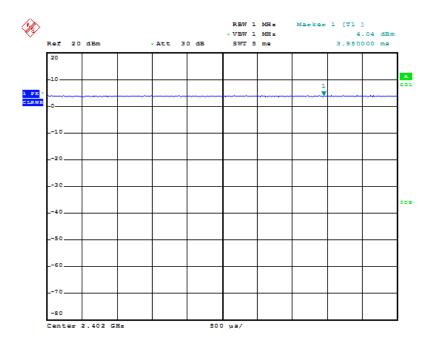


Date: 17.APR.2014 22:26:29


Report Format Version: Rev. 01 Page No. : 7 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014



## 3.11. Test Configurations

## 3.11.1. AC Power Line Conduction Emissions Test Configuration

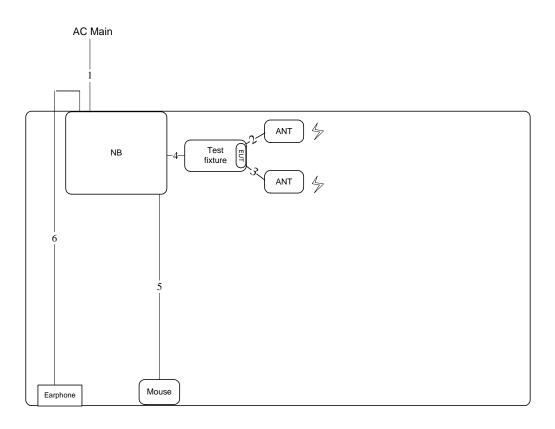




Item	Connection	Shield	Length
1	Power cable	No	1.8m
2	ANT cable	Yes	0.3m
3	ANT cable	Yes	0.3m
4	Mini HDMI cable	Yes	1m
5	USB cable	Yes	1.8m
6	Audio cable	No	1.5m

# 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

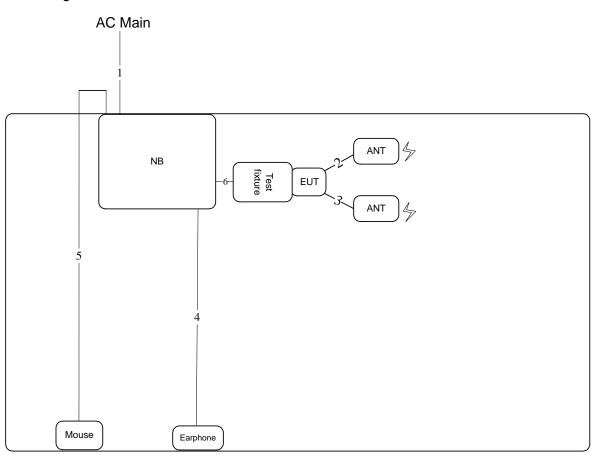




Item	Connection	Shield	Length		
1	Power cable	No	1.8m		
2	ANT cable	Yes	0.3m		
3	ANT cable	Yes	0.3m		
4	Audio cable	Yes	1.5m		
5	USB cable	Yes	1.8m		
6	Mini HDMI cable	Yes	0.5m		

Issued Date : Apr. 24, 2014







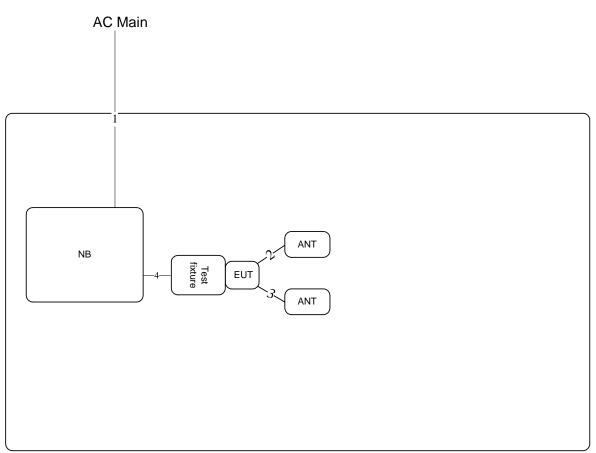

Item	Connection	Shield	Length
1	Power cable	No	1.8m
2	ANT cable	Yes	0.3m
3	ANT cable	Yes	0.3m
4	Mini HDMI cable	Yes	0.5m

### 4. TEST RESULT

#### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

- Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far
  from the conducting wall of the shielding room and at least 80 centimeters from any other
  grounded conducting surface.
- 2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
- 4. The frequency range from 150 kHz to 30 MHz was searched.
- 5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6. The measurement has to be done between each power line and ground at the power terminal.

Report Format Version: Rev. 01 Page No. : 11 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014

#### 4.1.4. Test Setup Layout

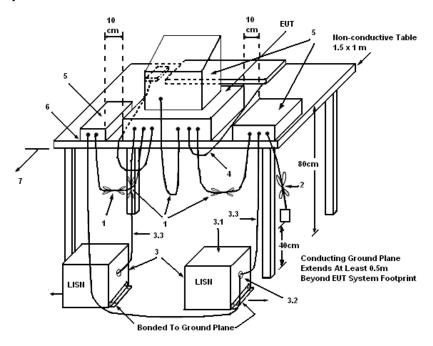

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation

There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test


The EUT was placed on the test table and programmed in normal function.





### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25℃	Humidity	52%	
Test Engineer	Hank Yang	Phase	Line	
Configuration	Normal Link	Test Mode	Mode 1	

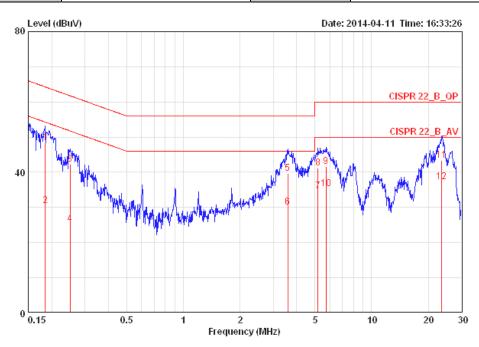

			0ver	Limit	LISN	Read	Cable		
	Freq	Level	Limit	Line	Factor	Level	Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.18443	48.48	-15.80	64.28	0.15	48.17	0.16	LINE	QP
2	0.18443	30.55	-23.73	54.28	0.15	30.24	0.16	LINE	AVERAGE
3	0.25078	42.30	-19.43	61.73	0.15	41.98	0.17	LINE	QP
4	0.25078	25.38	-26.35	51.73	0.15	25.06	0.17	LINE	AVERAGE
5	3.584	39.70	-16.30	56.00	0.26	39.15	0.29	LINE	QP
6	3.584	30.02	-15.98	46.00	0.26	29.47	0.29	LINE	AVERAGE
7	5.194	34.59	-15.41	50.00	0.30	33.97	0.32	LINE	AVERAGE
8	5.194	41.26	-18.74	60.00	0.30	40.64	0.32	LINE	QP
9	5.713	41.54	-18.46	60.00	0.31	40.90	0.33	LINE	QP
10	5.713	35.27	-14.73	50.00	0.31	34.63	0.33	LINE	AVERAGE
11	23.636	43.31	-16.69	60.00	0.71	42.04	0.56	LINE	QP
<b>12</b> @	23.636	37.22	-12.78	50.00	0.71	35.95	0.56	LINE	AVERAGE

Page No. : 13 of 43 Issued Date : Apr. 24, 2014




: 14 of 43

Issued Date : Apr. 24, 2014

Page No.



Temperature	25°C	Humidity	52%	
Test Engineer	Hank Yang	Phase	Neutral	
Configuration	Normal Link	Test Mode	Mode 1	

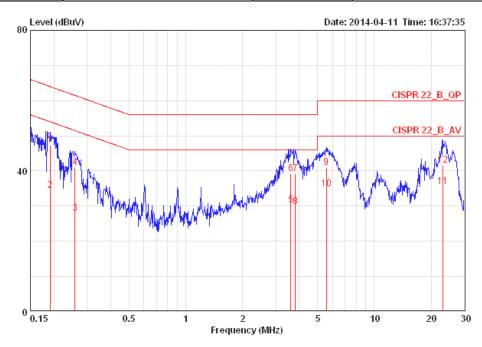

			0ver	Limit	LISN	Read	Cable		
	Freq	Level	Limit	Line	Factor	Level	Loss	Pol/Phase	Remark
	MHz	dBuV	дв	dBuV	dB	dBuV	dB		
1	0.19039	47.32	-16.70	64.02	0.07	47.09	0.16	NEUTRAL	QP
2	0.19039	34.43	-19.59	54.02	0.07	34.20	0.16	NEUTRAL	AVERAGE
3	0.25888	27.94	-23.53	51.47	0.07	27.70	0.17	NEUTRAL	AVERAGE
4	0.25888	41.00	-20.47	61.47	0.07	40.76	0.17	NEUTRAL	QP
5	3.603	30.25	-15.75	46.00	0.13	29.83	0.29	NEUTRAL	AVERAGE
6	3.603	39.33	-16.67	56.00	0.13	38.91	0.29	NEUTRAL	QP
7	3.820	39.26	-16.74	56.00	0.13	38.84	0.30	NEUTRAL	QP
8	3.820	29.86	-16.14	46.00	0.13	29.44	0.30	NEUTRAL	AVERAGE
9	5.564	41.00	-19.00	60.00	0.17	40.50	0.33	NEUTRAL	QP
10	5.564	34.81	-15.19	50.00	0.17	34.31	0.33	NEUTRAL	AVERAGE
11	23.018	35.60	-14.40	50.00	0.57	34.48	0.55	NEUTRAL	AVERAGE
12	23.018	41.65	-18.35	60.00	0.57	40.53	0.55	NEUTRAL	QP

#### Note:

Level = Read Level + LISN Factor + Cable Loss.

### 4.2. Maximum Conducted Output Power Measurement

#### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

#### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

#### 4.2.3. Test Procedures

- 1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2.
- 2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

#### 4.2.4. Test Setup Layout



#### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

Report Format Version: Rev. 01 Page No. : 15 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014



## 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	22°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	GFSK
Test Date	Apr. 17, 2014		

Channel	Frequency	Conducted Power (dBm)  Chain 1	Max. Limit (dBm)	Result
0	2402 MHz	5.09	30.00	Complies
20	2442 MHz	4.89	30.00	Complies
39	2480 MHz	4.32	30.00	Complies

Report Format Version: Rev. 01 Page No. : 16 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	5-30 % greater than the DTS channel bandwidth.
RBW	3 kHz ≤ RBW ≤ 100kHz
VBW	≥ 3 x RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

### 4.3.3. Test Procedures

- 1. Test procedures refer KDB 558074 D01 v03r01 section 10.2 Method PKPSD (peak PSD) and sum spectral maximal across the outputs.
- 2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
- 3. Ensure that the number of measurement points in the sweep  $\geq 2$  x span/RBW (use of a greater number of measurement points than this minimum requirement is recommended).
- 4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
- 5. The resulting PSD level must be  $\leq$  8 dBm.

#### 4.3.4. Test Setup Layout



Report Format Version: Rev. 01 Page No. : 17 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014



### 4.3.5. Test Deviation

There is no deviation with the original standard.

## 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

Report Format Version: Rev. 01 Page No. : 18 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014

### 4.3.7. Test Result of Power Spectral Density


Temperature	<b>22</b> °C	Humidity	60%
Test Engineer	Benson Peng	Configurations	GFSK

Channel	Frequency	Power Density (dBm/3kHz)  Chain 1	Power Density Limit (dBm/3kHz)	Result
0	2402 MHz	-11.27	8.00	Complies
20	2442 MHz	-11.45	8.00	Complies
39	2480 MHz	-12.39	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

### Power Density Plot on Configuration Bluetooth / 2402 MHz / Chain 1

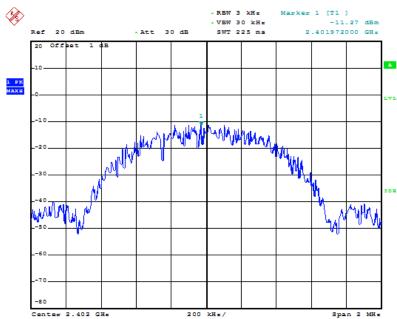

Date: 17.APR.2014 22:31:07

### 4.4. 6dB Spectrum Bandwidth Measurement

#### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

#### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	≥ 3 x RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

- 1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
- Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
- 3. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

Report Format Version: Rev. 01 Page No. : 20 of 43 FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014

### 4.4.7. Test Result of 6dB Spectrum Bandwidth


Temperature	22°C	Humidity	60%
Test Engineer	Benson Peng	Configurations	GFSK / Chain 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
0	2402 MHz	0.800	1.064	500	Complies
20	2442 MHz	0.800	1.068	500	Complies
39	2480 MHz	0.796	1.072	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

### 6 dB Bandwidth Plot on Configuration Bluetooth / 2480 MHz / Chain 1

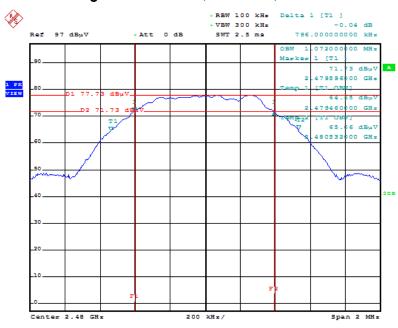

Date: 17.APR.2014 22:38:15

Report Format Version: Rev. 01 Page No. : 21 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014

### 4.5. Radiated Emissions Measurement

#### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

Report Format Version: Rev. 01 Page No. : 22 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014

#### 4.5.3. Test Procedures

Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8
meter above ground. The phase center of the receiving antenna mounted on the top of a
height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

 Report Format Version: Rev. 01
 Page No.
 : 23 of 43


 FCC ID: TX2-RTL8723BS
 Issued Date
 : Apr. 24, 2014






### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

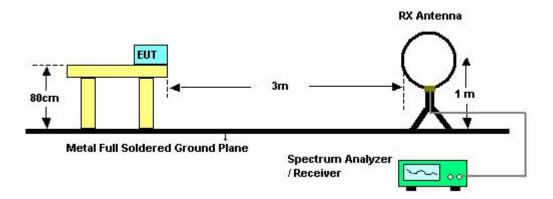

For Radiated Emissions: 30MHz~1GHz

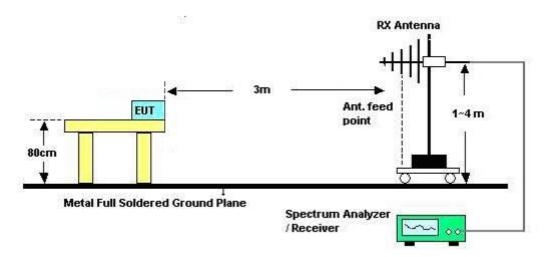

For Radiated Emissions: Above 1GHz

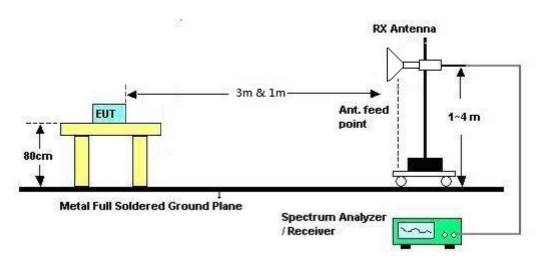



### 4.5.5. Test Deviation

There is no deviation with the original standard.

## 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

Report Format Version: Rev. 01 Page No. : 25 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014



## 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	54%
Test Engineer	Nick Peng	Configurations	Normal Link
Test Date	Apr. 19, 2014	Test Mode	Mode 1

Freq.	Level	Over Limit	Limit Line	Remark
(MHz)	(dBuV)	(dB)	(dBuV)	
-	-	-	-	See Note

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

 Report Format Version: Rev. 01
 Page No.
 : 26 of 43

 FCC ID: TX2-RTL8723BS
 Issued Date
 : Apr. 24, 2014






## 4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24°C	Humidity	54%
Test Engineer	Nick Peng	Configurations	Normal Link
Test Mode	Mode 1		


#### Horizontal

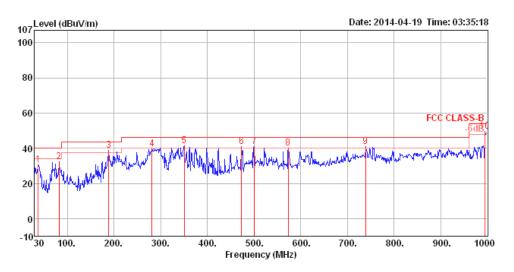

	Freq	Level	Limit Line	0ver Limit	Read Level			Preamp Factor		T/Pos	Pol/Phase	Remark
	MHz	dBu\//m	dBu∀/m	dB	dBu∀	dB	dB/m	dB	cm	deg		
1	37.76	30.69	40.00	-9.31	48.07	0.72	13.78	31.88	100	28	HORIZONTAL	Peak
2	82.38	32.23	40.00	-7.77	55.74	1.06	7.13	31.70	300	194	HORIZONTAL	Peak
3	189.08	38.64	43.50	-4.86	60.07	1.65	8.42	31.50	150	36	HORIZONTAL	Peak
4	281.23	39.76	46.00	-6.24	56.72	2.03	12.56	31.55	150	352	HORIZONTAL	Peak
5	350.10	41.51	46.00	-4.49	56.21	2.31	14.33	31.34	100	124	HORIZONTAL	Peak
6	473.29	40.94	46.00	-5.06	52.73	2.71	16.73	31.23	200	168	HORIZONTAL	Peak
7	500.45	40.75	46.00	-5.25	52.42	2.82	16.92	31.41	200	258	HORIZONTAL	Peak
8	573.20	40.30	46.00	-5.70	50.10	3.02	18.38	31.20	200	213	HORIZONTAL	Peak
9	739.07	40.80	46.00	-5.20	49.01	3.48	19.66	31.35	125	132	HORIZONTAL	Peak
10	995.15	49.45	54.00	-4.55	55.03	4.20	21.38	31.16	100	170	HORIZONTAL	Peak



#### Vertical

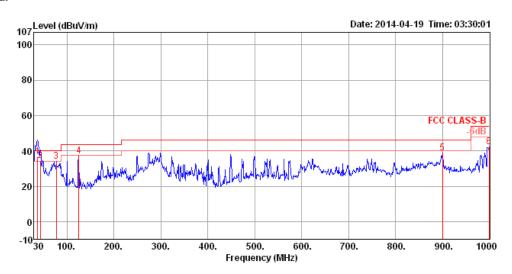

	Freq	Level		0ver Limit						T/Pos	Pol/Phase	Remark
	MHz	dBu√/m	dBu∀/m	dB	dBu∀	dB	dB/m	dB	cm	deg		
1	37.76	36.83	40.00	-3.17	54.21	0.72	13.78	31.88	100	167	VERTICAL	QP
2	43.58	34.56	40.00	-5.44	55.37	0.78	10.25	31.84	100	224	VERTICAL	QP
3	77.53	34.13	40.00	-5.87	58.27	1.03	6.53	31.70	125	256	VERTICAL	Peak
4	125.06	37.02	43.50	-6.48	55.53	1.33	11.73	31.57	100	304	VERTICAL	Peak
5	900.09	38.84	46.00	-7.16	45.44	3.97	20.64	31.21	150	184	VERTICAL	Peak
6	999.03	42.39	54.00	-11.61	47.93	4.21	21.43	31.18	150	253	VERTICAL	Peak

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) =  $20 \log Emission$  level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Report Format Version: Rev. 01 FCC ID: TX2-RTL8723BS

Page No. : 28 of 43

Issued Date : Apr. 24, 2014



## 4.5.9. Results for Radiated Emissions (1GHz $\sim$ 10<sup>th</sup> Harmonic)

Temperature	24°C	Humidity	54%
Test Engineer	Nick Peng	Configurations	Channel 0
Test Date	Apr. 08, 2014	Test Mode	Mode 1

### Horizontal

	Freq	Level	Limit Line						A/Pos		Pol/Phase	Remark
	MHz	dBu√/m	dBu∀/m	dB	dBu√	dB	dB/m	dB	cm	deg		
1	4802.17	43.85	74.00	-30.15	40.74	5.66	32.74	35.29	100	180	HORIZONTAL	Peak
2	4806.18	31.78	54.00	-22.22	28.67	5.66	32.74	35.29	100	180	HORIZONTAL	Average

### Vertical

	Freq	Level		Over Limit							Pol/Phase	Remark	
	MHz	dBu√/m	dBu√/m	dB	dBu√	dB	dB/m	dB	cm	deg			-
1	4801.59	31.79	54.00	-22.21	28.68	5.66	32.74	35.29	100	106	VERTICAL	Average	
2	4804.60	44.56	74.00	-29.44	41.45	5.66	32.74	35.29	100	106	VERTICAL	Peak	

Page No. : 29 of 43 Issued Date : Apr. 24, 2014

Temperature	24°C	Humidity	54%
Test Engineer	Nick Peng	Configurations	Channel 20
Test Date	Apr. 08, 2014	Test Mode	Mode 1

### Horizontal

	Freq	Level	Limit Line						A/Pos		Pol/Phase	Remark
	MHz	dBu∀/m	dBu∀/m	dB	dBu∀	dB	dB/m	dB	cm	deg		
1	4877.80	32.01	54.00	-21.99	28.78	5.75	32.80	35.32	100	123	HORIZONTAL	Average
2	4880.66	45.01	74.00	-28.99	41.77	5.76	32.80	35.32	100	123	HORIZONTAL	Peak
3	7321.75	50.21	74.00	-23.79	41.37	7.06	37.13	35.35	100	173	HORIZONTAL	Peak
4	7322.50	37.78	54.00	-16.22	28.94	7.06	37.13	35.35	100	173	HORIZONTAL	Average

### Vertical

	Freq	Level	Limit Line						A/Pos		Pol/Phase	Remark
	MHz	dBu∀/m	dBu∀/m	dB	dBu∨	dB	dB/m	dB	cm	deg		
1	4878.02	44.46	74.00	-29.54	41.23	5.75	32.80	35.32	100	217	VERTICAL	Peak
2	4879.20	31.94	54.00	-22.06	28.71	5.75	32.80	35.32	100	217	VERTICAL	Average
3	7319.07	49.57	74.00	-24.43	40.73	7.06	37.13	35.35	100	192	VERTICAL	Peak
4	7322.01	37.99	54.00	-16.01	29.15	7.06	37.13	35.35	100	192	VERTICAL	Average

Temperature	24°C	Humidity	54%
Test Engineer	Nick Peng	Configurations	Channel 39
Test Date	Apr. 08, 2014	Test Mode	Mode 1

#### Horizontal

	Freq	Level						Preamp Factor		T/Pos	Pol/Phase	Remark
	MHz	dBu∀/m	dBu∀/m	dB	dBu∀	dB	dB/m	dB	cm	deg		
1 2 3 4	4961.93 4962.38 7440.50 7442.12	44.28 50.37	74.00 74.00	-29.72 -23.63	40.91 41.37	5.85 7.11	32.87 37.17		100 100 100 100	238 238	HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL	Peak Peak

#### **Vertical**

	Freq	Level						Preamp Factor		T/Pos	Pol/Phase	Remark
	MHz	dBu√/m	dBu∀/m	dB	dBu∖∕	dB	dB/m	dB		deg		
1	4961.03	32.03	54.00	-21.97	28.66	5.85	32.87	35.35	100	250	VERTICAL	Average
2	4962.34	44.30	74.00	-29.70	40.93	5.85	32.87	35.35	100	250	VERTICAL	Peak
3	7441.01	50.45	74.00	-23.55	41.45	7.11	37.17	35.28	100	295	VERTICAL	Peak
4	7441.33	38.27	54.00	-15.73	29.27	7.11	37.17	35.28	100	295	VERTICAL	Average

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) =  $20 \log Emission level (uV/m)$ .

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Page No. : 31 of 43 Issued Date : Apr. 24, 2014

#### 4.6. Emissions Measurement

#### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Field Strength	Measurement Distance
(micorvolts/meter)	(meters)
2400/F(kHz)	300
24000/F(kHz)	30
30	30
100	3
150	3
200	3
500	3
	(micorvolts/meter)  2400/F(kHz)  24000/F(kHz)  30  100  150  200

#### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

#### 4.6.3. Test Procedures

#### For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

#### For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.
- The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.
   Only worst data of each operating mode is presented.

Report Format Version: Rev. 01 Page No. : 32 of 43 FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014



### 4.6.4. Test Setup Layout

### For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

### For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

Report Format Version: Rev. 01 Page No. : 33 of 43 FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014

### 4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	54%
Test Engineer	Nick Peng	Configurations	Channel 0, 20, 39
Test Date	Apr. 08, 2014	Test Mode	Mode 1

#### Channel 0

	Freq	Level						Preamp Factor		T/Pos	Pol/Phase	Remark
	MHz	dBu∀/m	dBu∀/m	dB	dBu∀	dB	dB/m	dB	cm	deg		
1	2362.10	43.77	54.00	-10.23	12.21	3.66	27.90	0.00	142	88	HORIZONTAL	Average
2	2362.20	57.15	74.00	-16.85	25.59	3.66	27.90	0.00	142	88	HORIZONTAL	Peak
3	2402.00	103.73			72.14	3.69	27.90	0.00	142	88	HORIZONTAL	Average
4	2402.00	104.85			73.26	3.69	27.90	0.00	142	88	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2402 MHz.

#### Channel 20

	Freq	Level	Limit Line					Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBu∀/m	dBu∀/m	dB	dBu∀	dB	dB/m	dB	cm	deg		
1	2360.00	44.61	54.00	-9.39	13.05	3.66	27.90	0.00	143	263	HORIZONTAL	Average
2	2360.00	57.00	74.00	-17.00	25.44	3.66	27.90	0.00	143	263	HORIZONTAL	Peak
3	2440.00	102.69			71.08	3.71	27.90	0.00	143	263	HORIZONTAL	Average
4	2440.00	103.43			71.82	3.71	27.90	0.00	143	263	HORIZOHTAL	Peak
5	2492.10	39.33	54.00	-14.67	7.69	3.74	27.90	0.00	143	263	HORIZONTAL	Average
6	2495.30	56.87	74.00	-17.13	25.23	3.74	27.90	0.00	143	263	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2442 MHz.

#### Channel 39

			Limit	Over	Read	CableA	ntenna	Preamp	A/Pos	T/Pos		
	Freq	Level	Line	Limit	Level	Loss	Factor	Factor			Pol/Phase	Remark
	MHz	dBu√/m	dBu∀/m	dB	dBu√	dB	dB/m	——dB	Cm	deg		
1	2480.00	100.25			68.62	3.73	27.90	0.00	134	260	HORIZONTAL	Average
2	2480.00	101.48			69.85	3.73	27.90	0.00	134	260	HORIZONTAL	Peak
3	2483.50	39.22	54.00	-14.78	7.59	3.73	27.90	0.00	134	260	HORIZONTAL	Average
4	2483.50	56.44	74.00	-17.56	24.81	3.73	27.90	0.00	134	260	HORIZONTAL	Peak

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) =  $20 \log Emission$  level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 Report Format Version: Rev. 01
 Page No.
 : 34 of 43

 FCC ID: TX2-RTL8723BS
 Issued Date
 : Apr. 24, 2014






## For Emission not in Restricted Band Plot on Configuration / Reference Level




Plot on Configuration For Bluetooth 4.0 / Channel 0 / 30MHz~2400MHz (down 30dBc)

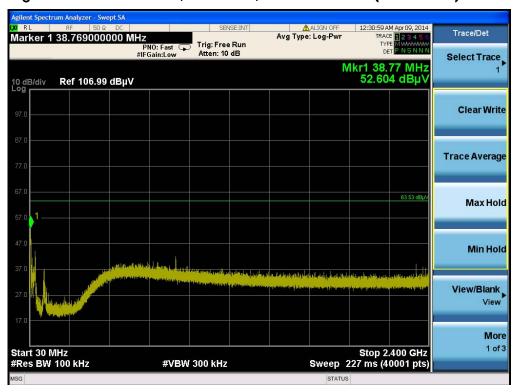





#### Plot on Configuration For Bluetooth 4.0 / Channel 0 / 2500MHz~26500MHz (down 30dBc)

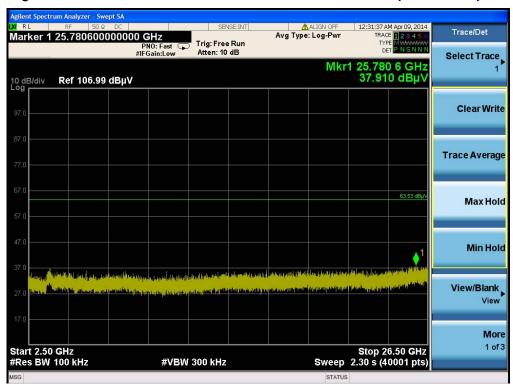

Plot on Configuration For Bluetooth 4.0 / Channel 39 / 30MHz~2400MHz (down 30dBc)




Page No. : 36 of 43

Issued Date : Apr. 24, 2014





### Plot on Configuration For Bluetooth 4.0 / Channel 39 / 2500MHz~26500MHz (down 30dBc)

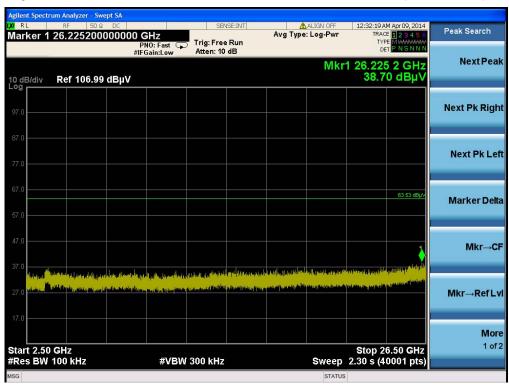

Page No. : 37 of 43 Issued Date : Apr. 24, 2014



### 4.7. Antenna Requirements

#### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

Report Format Version: Rev. 01 Page No. : 38 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014



## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75 GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112B	2928	30MHz ~ 2GHz	Dec. 27, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)

Report Format Version: Rev. 01 FCC ID: TX2-RTL8723BS

Page No. : 39 of 43 Issued Date : Apr. 24, 2014



: 40 of 43

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

"\*" Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.



## 6. MEASUREMENT UNCERTAINTY

### <u>Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)</u>

	Un	certaint	by of $x_i$		
Contribution	Value	Unit	Probability Distribution k	$u(x_i)$	
Receiver reading	0.026	dB	normal(k=2)	0.013	
Cable loss	0.002	dB	normal(k=2)	0.001	
AMN/LISN specification	1.200	dB	normal(k=2)	0.600	
Mismatch  Receiver VSWR 1 =  AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060	
Combined standard uncertainty Uc(y)				1.2	
Measuring uncertainty for a level of confidence	of 95% U	=2Uc(y	·)	2.4	

### <u>Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)</u>

	Un	certain	$\mathbf{ty}$ of $x_i$	
Contribution	Value	Unit	Probability Distribution k	$u(x_i)$
Receiver reading	±0.173	dB	k=1	0.086
Cable loss	±0.174	dB	k=2	0.087
Antenna gain	±0.169	dB	k=2	0.084
Site imperfection	±0.433	dB	Triangular	0.214
Pre-amplifier gain	±0.366	dB	k=2	0.183
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty Uc(y)				1.778
Measuring uncertainty for a level of confidence	of 95% U	=2Uc(y	')	3.555

Report Format Version: Rev. 01 Page No. : 41 of 43 FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014



## <u>Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)</u>

	Uncertainty of $x_i$			
Contribution	Value	Unit	Probability Distribution k	$u(x_i)$
Receiver reading	±0.191	dB	k=1	0.095
Cable loss	±0.169	dB	k=2	0.084
Antenna gain	±0.191	dB	k=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	k=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty Uc(y)	1.839			
Measuring uncertainty for a level of confidence	3.678			

## <u>Uncertainty of Radiated Emission Measurement (18GHz $\sim$ 40GHz)</u>

	Uncertainty of $x_i$			
Contribution	Value	Unit	Probability Distribution k	$u(x_i)$
Receiver reading	±0.186	dB	k=1	0.093
Cable loss	±0.167	dB	k=2	0.083
Antenna gain	±0.190	dB	k=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	k=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty Uc(y)	1.771			
Measuring uncertainty for a level of confidence	3.541			

Report Format Version: Rev. 01 Page No. : 42 of 43
FCC ID: TX2-RTL8723BS Issued Date : Apr. 24, 2014



## **Uncertainty of Conducted Emission Measurement**

	Uncertainty of $x_i$			
Contribution	Value	Unit	Probability Distribution k	$u(x_i)$
Cable loss	±0.038	dB	k=2	0.019
Attenuator	±0.047	dB	k=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty Uc(y)	0.863			
Measuring uncertainty for a level of confidence	1.726			

Page No. : 43 of 43 Issued Date : Apr. 24, 2014