



## FCC RADIO TEST REPORT

Applicant's company	<b>Realtek Semiconductor Corp.</b>
Applicant Address	No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan
FCC ID	<b>TX2-RTL8821AE</b>
Manufacturer's company	<b>Realtek Semiconductor Corp.</b>
Manufacturer Address	No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan

Product Name	802.11a/b/g/n/ac RTL8821AE Combo module
Brand Name	REALTEK
Model No.	RTL8821AE
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Apr. 26, 2013
Final Test Date	Oct. 07, 2013
Submission Type	Class II Change

### Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g part and IEEE 802.11a/ac (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r01 and KDB 662911 D01 v02**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Class II Change .....	6
3.4. Table for Filed Antenna.....	7
3.5. Table for Carrier Frequencies .....	9
3.6. Table for Test Modes.....	10
3.7. Table for Testing Locations.....	13
3.8. Table for Supporting Units .....	13
3.9. Test Configurations .....	15
<b>4. TEST RESULT .....</b>	<b>18</b>
4.1. AC Power Line Conducted Emissions Measurement.....	18
4.2. Maximum Conducted Output Power Measurement.....	22
4.3. Radiated Emissions Measurement.....	25
4.4. Emissions Measurement.....	68
4.5. Antenna Requirements .....	118
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>119</b>
<b>6. TEST LOCATION.....</b>	<b>121</b>
<b>7. MEASUREMENT UNCERTAINTY.....</b>	<b>122</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A12</b>
<b>Appendix B. ANTENNA LIST</b>	



## History of This Test Report



## 1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11a/b/g/n/ac RTL8821AE Combo module  
Brand Name : REALTEK  
Model No. : RTL8821AE  
Applicant : Realtek Semiconductor Corp.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 26, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads "Sam Chen".

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	8.44 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	11.55 dB
4.3	15.247(d)	Radiated Emissions	Complies	3.07 dB
4.4	15.247(d)	Band Edge Emissions	Complies	3.81 dB
4.5	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	For 2.4GHz Band: 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth For 5GHz Band: 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth ; 1 for 80MHz bandwidth
Channel Band Width (99%)	For 2.4GHz Band: MCS0 (20MHz): 17.76 MHz ; MCS0 (40MHz): 36.48 MHz For 5GHz Band: 802.11ac MCS0/Nss1 (20MHz): 17.76 MHz ; 802.11ac MCS0/Nss1 (40MHz): 36.48 MHz ; 802.11ac MCS0/Nss1 (80MHz): 76.16 MHz
Maximum Conducted Output Power	For 2.4GHz Band: MCS0 (20MHz): 16.32 dBm ; MCS0 (40MHz): 16.41 dBm For 5GHz Band: 802.11ac MCS0/Nss1 (20MHz): 16.42 dBm ; 802.11ac MCS0/Nss1 (40MHz): 16.22 dBm ; 802.11ac MCS0/Nss1 (80MHz): 14.13 dBm
Carrier Frequencies	Please refer to section 3.5
Antenna	Please refer to section 3.4

**802.11a/b/g**

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 15.20 MHz ; 11g: 16.56 MHz ; 11a: 16.64 MHz
Maximum Conducted Output Power	11b: 18.45 dBm ; 11g: 16.33 dBm ; 11a: 16.44 dBm
Carrier Frequencies	Please refer to section 3.5
Antenna	Please refer to section 3.4

**Antenna & Band width**

Antenna	Single (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11b	V	X	X
IEEE 802.11g	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

**IEEE 11n/ac Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	1	MCS 0-7
802.11n (HT40)	1	MCS 0-7
802.11ac (VHT20)	1	MCS 0-8/Nss1
802.11ac (VHT40)	1	MCS 0-9/Nss1
802.11ac (VHT80)	1	MCS 0-9/Nss1

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

### 3.2. Accessories

N/A

### 3.3. Table for Class II Change

This product is an extension of original report under Sporton project number: 342603AA

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
For HMC type:  1. It changed PCB Layout of Power Supply. 2. It added RC filter and 2.4GHz RX LNA.  There is no change in existing RF relevant portion.	1. Conducted Emissions 2. Radiated Emissions (Below 1GHz) 3. Radiated Emissions (Above 1GHz only for 2.4GHz) 4. Emissions Measurement (only for 2.4GHz)
For NGFF type:  1. It changed PCB Layout of Power Supply. 2. It added RC filter.  There is no change in existing RF relevant portion.	

### 3.4. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	LYNwave	ALA110-222050-300011	PIFA Antenna	I-PEX MHF4	3.5	5.0
2	LYNwave	ALA110-222050-300010	PIFA Antenna	I-PEX	3.5	5.0
3	JOYMAX	TWF-614XMPXX-500	Dipole Antenna	I-PEX	3.0	5.0
4	Realtek	PANT-001	SLOT Antenna	I-PEX	3.33	4.52
5	Realtek	PANT-002	SLOT Antenna	I-PEX MHF4	3.33	4.52

There are six configurations of EUT. The more information is listed as below table.

Configuration	Type	Module	Power Type	Antenna Variety	Type of Antenna
1	HMC	RC	PCI-E	Diversity	PIFA with I-PEX connector
					Dipole with I-PEX connector
					SLOT with I-PEX connector
2	HMC	RC	PCI-E	Fixed	PIFA with I-PEX connector
					Dipole with I-PEX connector
					SLOT with I-PEX connector
3	NGFF	RC	PCI-E	Diversity	PIFA with I-PEX MHF4 connector
					SLOT with I-PEX MHF4 connector
4	NGFF	RC	PCI-E	Fixed	PIFA with I-PEX MHF4 connector
					SLOT with I-PEX MHF4 connector
5	NGFF	RC	SDIO	Diversity	PIFA with I-PEX MHF4 connector
					SLOT with I-PEX MHF4 connector
6	NGFF	RC	SDIO	Fixed	PIFA with I-PEX MHF4 connector
					SLOT with I-PEX MHF4 connector
7	HMC	RC+LNA	PCI-E	Diversity	PIFA with I-PEX connector
					Dipole with I-PEX connector
					SLOT with I-PEX connector
8	HMC	RC+LNA	PCI-E	Fixed	PIFA with I-PEX connector
					Dipole with I-PEX connector
					SLOT with I-PEX connector

Note: The more detail information of diversity type and fixed type is listed as below.

**For diversity type: (Both of those two antenna connectors can be used.)**

**<For 2.4GHz Band:>**

The EUT supports the antenna with TX/RX diversity function for 2.4GHz WLAN and Bluetooth, but only one of them will be used at the same time.

Base on WLAN's operation mode to select the other antenna to work.

(Ex. Assume Main port was selected to conduct transmitting function in 2.4GHz WLAN, so AUX port was selected in Bluetooth Mode. Vice versa.)

**<For 5GHz Band:>**

The EUT supports the antenna with TX/RX diversity function for 5GHz WLAN and Bluetooth, and both them can transmit and receive signal simultaneously.

**For WLAN function (1TX, 1RX):**

Both of Chain 1 and Chain 2 can be used as transmitting/receiving functions, but only one antenna can be used as transmitting/receiving functions at the same time.

Chain 1 generated the worst case than Chain 2, so it is tested and recorded in the report.

**For Bluetooth function (1TX, 1RX):**

Both of Chain 1 and Chain 2 can be used as transmitting/receiving functions, but only one antenna can be used as transmitting/receiving functions at the same time.

Chain 1 generated the worst case than Chain 2, so it is tested and recorded in the report.

**For fixed type: (Chain 1 is designated for 2.4 GHz WLAN function, Chain 2 is designated for 5GHz WLAN and Bluetooth functions.)**

**For 2.4GHz WLAN function (1TX, 1RX):**


Only Chain 1 can be used as transmitting/receiving functions.

**For 5GHz WLAN function (1TX, 1RX):**

Only Chain 2 can be used as transmitting/receiving functions.

**For Bluetooth function (1TX, 1RX):**

Only Chain 2 can be used as transmitting/receiving functions.

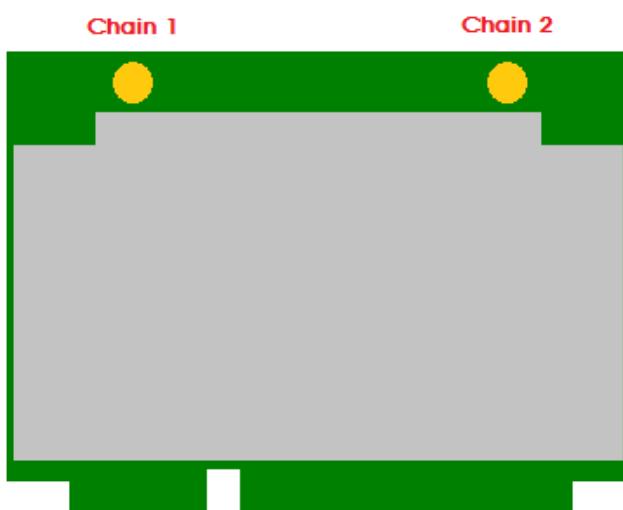

### 3.5. Table for Carrier Frequencies

#### For 2.4GHz Band:

There are two bandwidth systems.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

#### For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

### 3.6. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n 20MHz	MCS0	1/6/11	1
	11n 40MHz	MCS0	3/6/9	1
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n 20MHz	MCS0	1/6/11	1
	11n 40MHz	MCS0	3/6/9	1
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Band Edge Emissions	11n 20MHz	MCS0	1/6/11	1
	11n 40MHz	MCS0	3/6/9	1
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1

The following test modes were performed for all tests:

**< For Conducted Emission test >:**

For RC+LNA module:

The mode "Diversity + PIFA antenna" has been evaluated to be the worst case for Radiated emission below 1GHz test.

For RC module / HMC type:

The mode "Fixed + PIFA antenna" has been evaluated to be the worst case for Radiated emission below 1GHz test.

For RC module / NGFF type:

The mode "Diversity + SLOT antenna" has been evaluated to be the worst case for Radiated emission below 1GHz test.

Consequently, measurement for Conducted emission test will follow this same test mode.

Test Mode	Description
1	HMC + PCI-E + Diversity + PIFA (I-PEX connector) / RC+LNA module
2	HMC + PCI-E + Fixed + PIFA (I-PEX connector) / RC module
3	NGFF + PCI-E + Diversity + SLOT (I-PEX MHF4 connector) / RC module
4	NGFF + SDIO + Diversity + SLOT (I-PEX MHF4 connector) / RC module

Mode 1 generated the worst test result, so it was recorded in this report.

**< For Radiated Emission below 1GHz test >:**

Test Mode	Description
1	HMC + PCI-E + Diversity + PIFA (I-PEX connector) / RC+LNA module
2	HMC + PCI-E + Fixed + PIFA (I-PEX connector) / RC+LNA module
Mode 1 is found as the worse case between Mode 1 and Mode 2, thus the measurement (Diversity type) for Mode 3 ~ Mode 4 will follow this same test mode.	
3	HMC + PCI-E + Diversity + SLOT (I-PEX connector) / RC+LNA module
4	HMC + PCI-E + Diversity + Dipole (I-PEX connector) / RC+LNA module
5	HMC + PCI-E + Diversity + PIFA (I-PEX connector) / RC module
6	HMC + PCI-E + Fixed + PIFA (I-PEX connector) / RC module
Mode 6 is found as the worse case between Mode 5 and Mode 6, thus the measurement (Fixed type) for Mode 7 ~ Mode 8 will follow this same test mode.	
7	HMC + PCI-E + Fixed + SOLT (I-PEX connector) / RC module
8	HMC + PCI-E + Fixed + Dipole (I-PEX connector) / RC module
9	NGFF+ PCI-E + Diversity + PIFA (I-PEX MHF4 connector) / RC module
10	NGFF + PCI-E + Fixed + PIFA (I-PEX MHF4 connector) / RC module
Mode 9 is found as the worse case between Mode 9 and Mode 10, thus the measurement (Diversity type) for Mode 11 will follow this same test mode.	
11	NGFF + SDIO + Diversity + SLOT (I-PEX MHF4 connector) / RC module
Mode 11 generated the worst test result, so it was recorded in this report.	

**< For Radiated Emission above1GHz test >:**

Test Mode	Description
1	HMC + Diversity + PIFA (I-PEX connector) / RC+LNA Module
2	HMC + Fixed + PIFA (I-PEX connector) / RC+LNA Module
Mode 1 is found as the worse case between Mode 1 and Mode 2, thus the measurement (Fixed type) for Mode 3 ~ Mode 4 will follow this same test mode.	
3	HMC + Fixed + SLOT (I-PEX connector) / RC+LNA Module
4	HMC + Fixed + Dipole (I-PEX connector) / RC+LNA Module
Mode 2 ~ Mode 3 and Mode 4 generated the worst test result, so these three modes were recorded in the report.	

### 3.7. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

### 3.8. Table for Supporting Units

#### Test Site: CO01-CB

Support Unit	Brand	Model	FCC ID
Wireless AP	Planex	GW-AP54SGX	N/A
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6220	QDS-BRCM1049LE
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A
Test Fixture (For HMC type)	REALTEK	PCIE Adapter	N/A
Test Fixture (For NGFF type)	REALTEK	PCIE & SDIO Adapter	N/A

#### Test Site: 03CH01-CB (Below 1GHz)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	D420	E2KWM3945ABG
Mouse	Logitech	M-U0026	DoC
Earphone	E-BOOKI	E-EPC040	N/A
Wireless AP	Planex	GW-AP54SGX	N/A
Test Fixture (For HMC type)	REALTEK	PCIE Adapter	N/A
Test Fixture (For NGFF type)	REALTEK	PCIE & SDIO Adapter	N/A

#### Test Site: 03CH01-CB (Above 1GHz)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE


**Test Site: TH01-CB**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	D2A62L1989V5
Test Fixture (For HMC type)	REALTEK	PCIE Adapter	N/A
Test Fixture (For NGFF type)	REALTEK	PCIE & SDIO Adapter	N/A

### 3.9. Test Configurations

#### 3.9.1. AC Power Line Conduction Emissions and Radiation Emissions (Below 1GHz) Test Configuration


Conduction Emissions Test Mode: Mode 1, Radiation Emissions (Below 1GHz): Mode 11

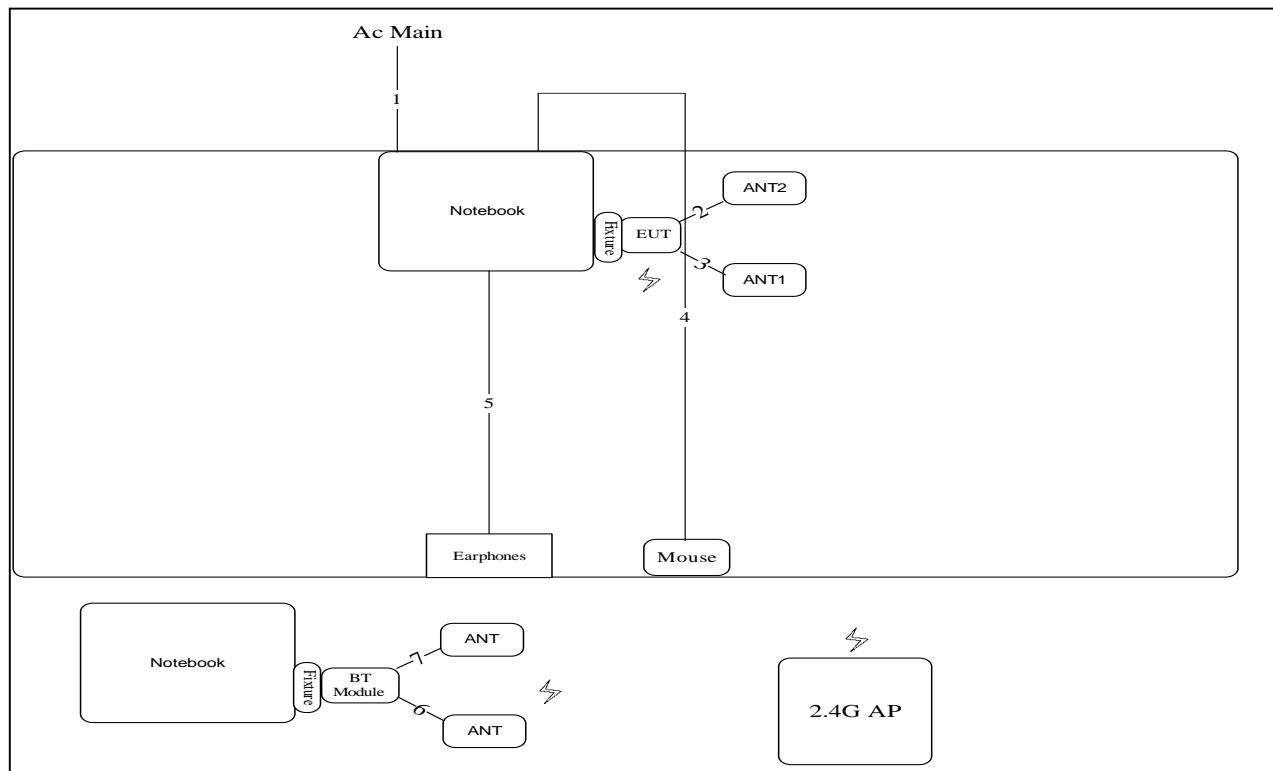

Item	Connection	Shield	Length
1	Power cable	No	2.6m
2	ANT cable	Yes	0.18m
3	ANT cable	Yes	0.18m
4	USB cable	Yes	1.8m
5	Audio cable	No	1.1m
6	ANT cable	Yes	0.18m
7	ANT cable	Yes	0.18m


### 3.9.2. Radiation Emissions Test (Above 1GHz) Configuration

Test Mode: Mode 2、Mode 3

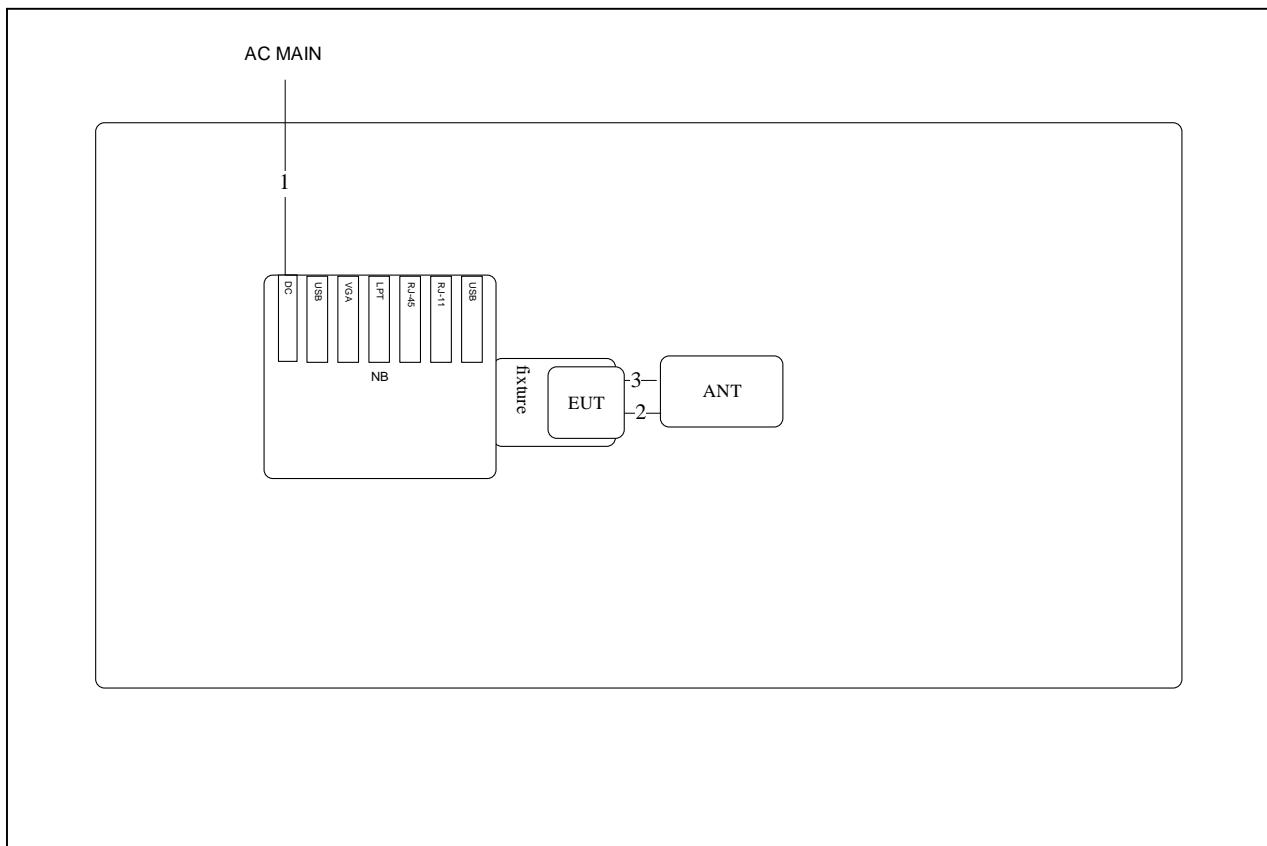

Item	Connection	Shielded	Length(m)
1	Power cable	No	2.6m
2	ANT cable	No	0.3m
3	ANT cable	No	0.3m

Test Mode: Mode 4

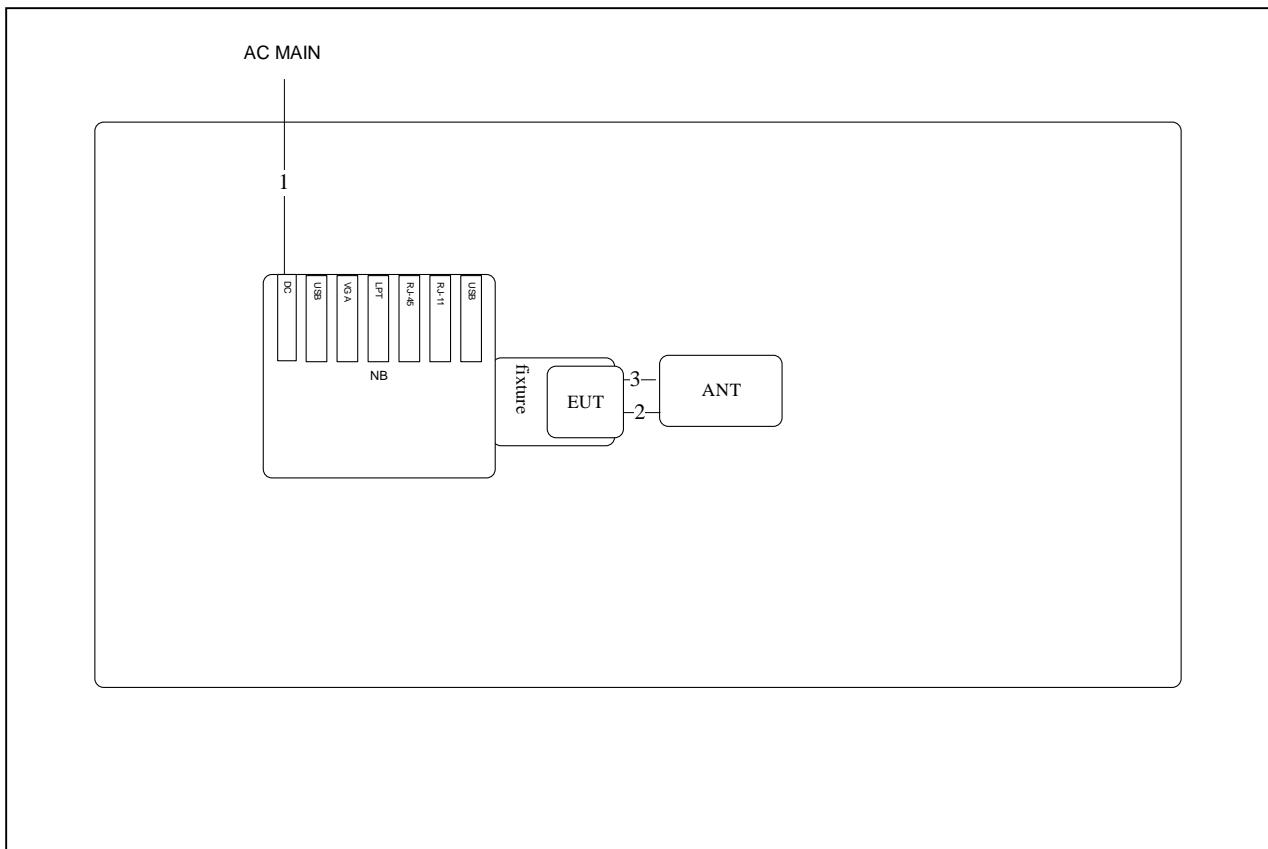

Item	Connection	Shielded	Length(m)
1	Power cable	No	2.6m
2	ANT cable	No	0.18m
3	ANT cable	No	0.18m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	150kHz
Stop Frequency	30 MHz
IF Bandwidth	9kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

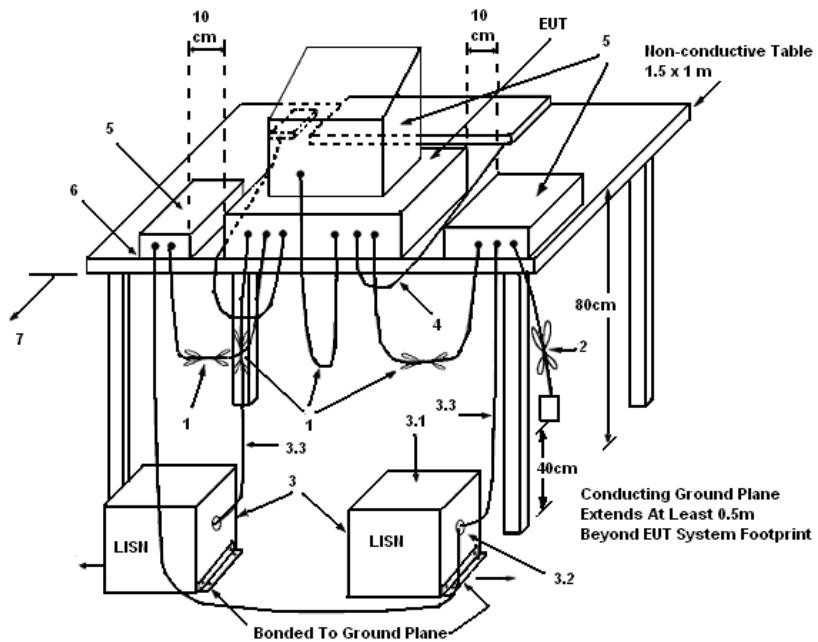

## LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	60%
Test Engineer	Ryo Fan	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

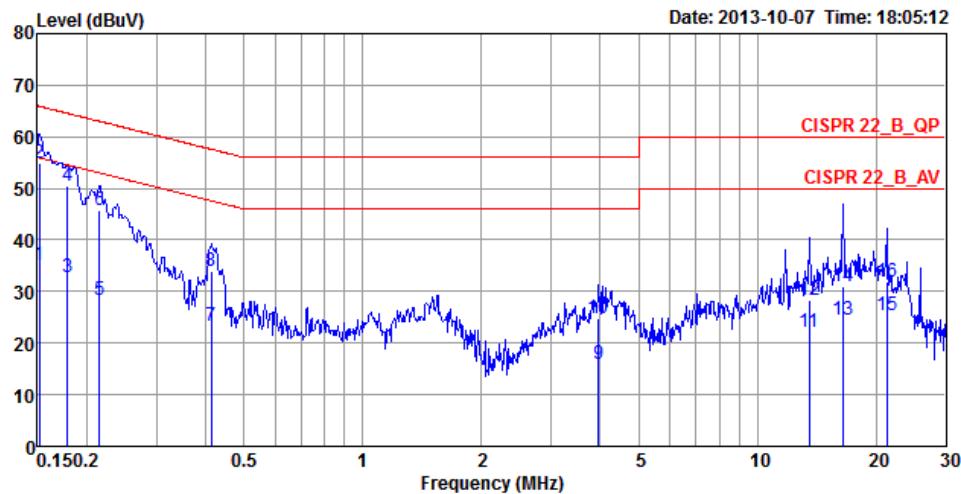

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase
		Line	Level	Factor	Loss	Remark	
	MHz	dBuV	dB	dBuV	dB	dB	
1 a	0.1516	35.11	-20.80	55.91	34.84	0.22	0.05 Average LINE
2 q	0.1516	55.01	-10.90	65.91	54.74	0.22	0.05 QP LINE
3	0.1787	32.85	-21.70	54.55	32.57	0.21	0.07 Average LINE
4	0.1787	50.44	-14.11	64.55	50.16	0.21	0.07 QP LINE
5	0.2151	28.39	-24.62	53.01	28.11	0.21	0.07 Average LINE
6	0.2151	45.87	-17.14	63.01	45.59	0.21	0.07 QP LINE
7	0.4127	23.29	-24.30	47.59	23.02	0.22	0.05 Average LINE
8	0.4127	33.82	-23.77	57.59	33.55	0.22	0.05 QP LINE
9	3.9639	15.81	-30.19	46.00	15.39	0.29	0.13 Average LINE
10	3.9639	24.76	-31.24	56.00	24.34	0.29	0.13 QP LINE
11	13.5509	22.04	-27.96	50.00	21.35	0.56	0.13 Average LINE
12	13.5509	28.36	-31.64	60.00	27.67	0.56	0.13 QP LINE
13	16.4856	24.45	-25.55	50.00	23.68	0.65	0.12 Average LINE
14	16.4856	30.92	-29.08	60.00	30.15	0.65	0.12 QP LINE
15	21.2596	25.45	-24.55	50.00	24.51	0.77	0.17 Average LINE
16	21.2596	31.96	-28.04	60.00	31.02	0.77	0.17 QP LINE

Temperature	25°C	Humidity	60%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

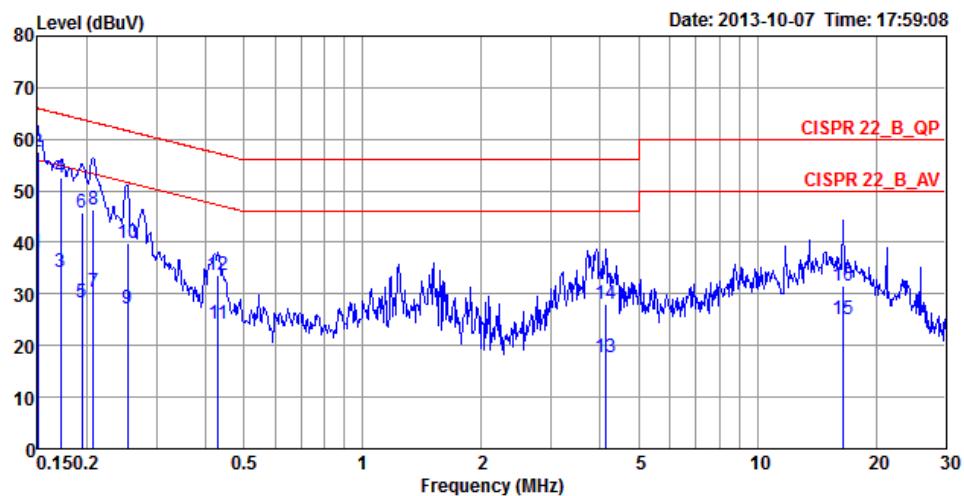

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase
		Limit	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 a	0.1500	38.12	-17.88	56.00	37.98	0.09	0.05 Average NEUTRAL
2 q	0.1500	57.56	-8.44	66.00	57.42	0.09	0.05 QP NEUTRAL
3	0.1712	34.14	-20.76	54.90	34.01	0.08	0.05 Average NEUTRAL
4	0.1712	52.64	-12.26	64.90	52.51	0.08	0.05 QP NEUTRAL
5	0.1945	28.44	-25.40	53.84	28.30	0.07	0.07 Average NEUTRAL
6	0.1945	45.65	-18.19	63.84	45.51	0.07	0.07 QP NEUTRAL
7	0.2072	30.41	-22.91	53.32	30.27	0.07	0.07 Average NEUTRAL
8	0.2072	46.27	-17.05	63.32	46.13	0.07	0.07 QP NEUTRAL
9	0.2535	27.24	-24.40	51.64	27.11	0.07	0.06 Average NEUTRAL
10	0.2535	39.74	-21.90	61.64	39.61	0.07	0.06 QP NEUTRAL
11	0.4305	24.09	-23.15	47.24	23.96	0.08	0.05 Average NEUTRAL
12	0.4305	33.67	-23.57	57.24	33.54	0.08	0.05 QP NEUTRAL
13	4.1356	17.84	-28.16	46.00	17.55	0.16	0.13 Average NEUTRAL
14	4.1356	27.96	-28.04	56.00	27.67	0.16	0.13 QP NEUTRAL
15	16.4856	25.13	-24.87	50.00	24.58	0.43	0.12 Average NEUTRAL
16	16.4856	31.71	-28.29	60.00	31.16	0.43	0.12 QP NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

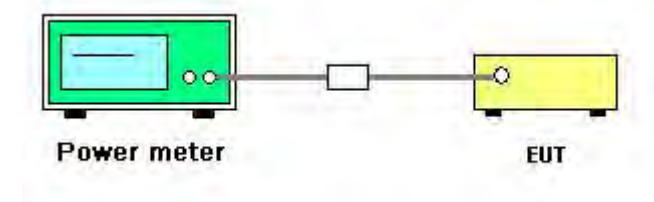

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n
Test Date	May 28, 2013		

##### Configuration IEEE 802.11n MCS0 20MHz / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.41	30.00	Complies
6	2437 MHz	16.32	30.00	Complies
11	2462 MHz	13.28	30.00	Complies

##### Configuration IEEE 802.11n MCS0 40MHz / Chain 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	13.49	30.00	Complies
6	2437 MHz	16.41	30.00	Complies
9	2452 MHz	13.42	30.00	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Benson Peng	<b>Configurations</b>	IEEE 802.11b/g
<b>Test Date</b>	May 28, 2013		

**Configuration IEEE 802.11b / Chain 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.28	30.00	Complies
6	2437 MHz	18.45	30.00	Complies
11	2462 MHz	16.35	30.00	Complies

**Configuration IEEE 802.11g / Chain 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.42	30.00	Complies
6	2437 MHz	16.33	30.00	Complies
11	2462 MHz	15.36	30.00	Complies

## 4.3. Radiated Emissions Measurement

### 4.3.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1GHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

#### 4.3.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.3.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

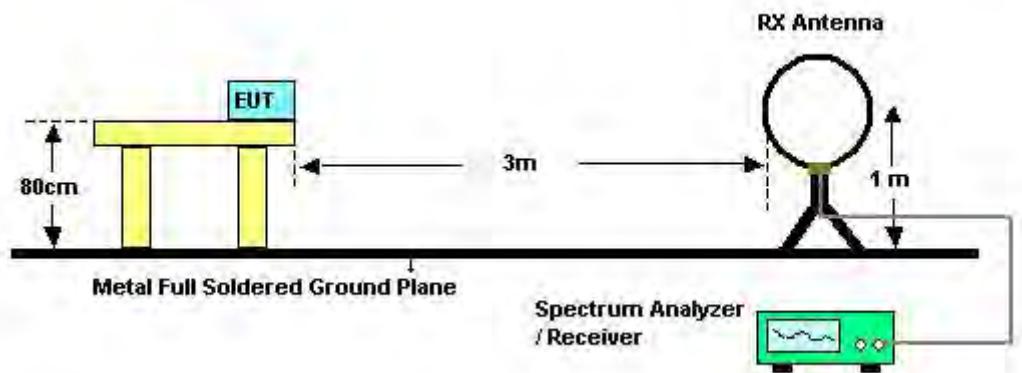

For radiated emissions below 1GHz

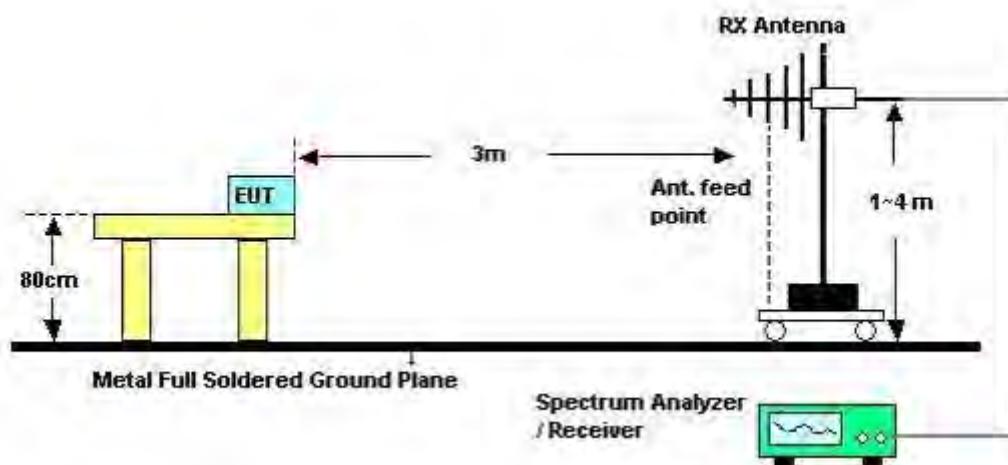

For radiated emissions above 1GHz

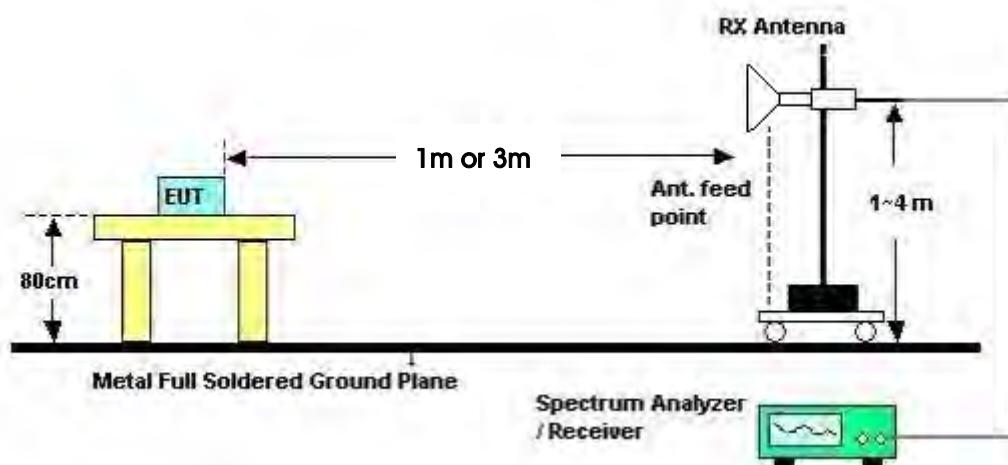

#### **4.3.5. Test Deviation**

There is no deviation with the original standard.

#### **4.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	Normal Link
Test Date	Sep. 14, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.3.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	Normal Link
Test Mode	Mode 11		

##### Horizontal

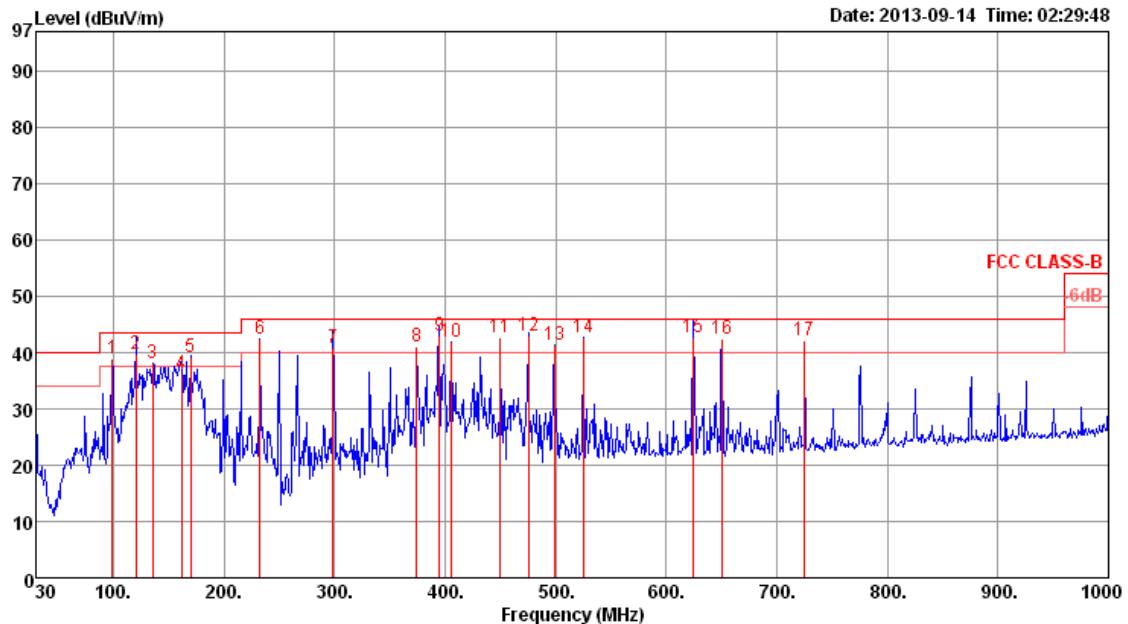

Freq	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
	Line	Limit	Level	Loss	Factor	Factor			
MHz	/m	/m	dB	dB	dB/m	dB	cm	deg	
1	98.87	39.04	43.50	-4.46	54.69	1.17	10.79	27.61	QP
2	120.21	39.75	43.50	-3.75	53.42	1.30	12.53	27.50	QP
3	135.73	38.08	43.50	-5.42	51.79	1.40	12.31	27.42	Peak
4	161.92	36.08	43.50	-7.42	49.77	1.42	12.18	27.29	QP
5	169.68	39.09	43.50	-4.41	52.10	1.48	12.76	27.25	QP
6	232.73	42.29	46.00	-3.71	56.10	1.74	11.48	27.03	Peak
7	298.69	40.88	46.00	-5.12	52.40	2.03	13.35	26.90	QP
8	374.35	40.95	46.00	-5.05	50.79	2.20	15.38	27.42	QP
9	394.72	42.88	46.00	-3.12	52.23	2.28	15.93	27.56	QP
10	405.39	41.95	46.00	-4.05	51.11	2.32	16.15	27.63	Peak
11	450.01	42.59	46.00	-3.41	51.13	2.47	16.84	27.85	QP
12	475.23	42.93	46.00	-3.07	51.09	2.57	17.24	27.97	Peak
13	498.51	41.26	46.00	-4.74	49.09	2.66	17.60	28.09	Peak
14	524.70	42.81	46.00	-3.19	50.28	2.72	17.91	28.10	Peak
15	624.61	42.79	46.00	-3.21	49.12	2.90	18.85	28.08	Peak
16	650.80	42.49	46.00	-3.51	48.62	2.99	18.93	28.05	Peak
17	725.49	42.18	46.00	-3.82	47.67	3.15	19.26	27.90	QP

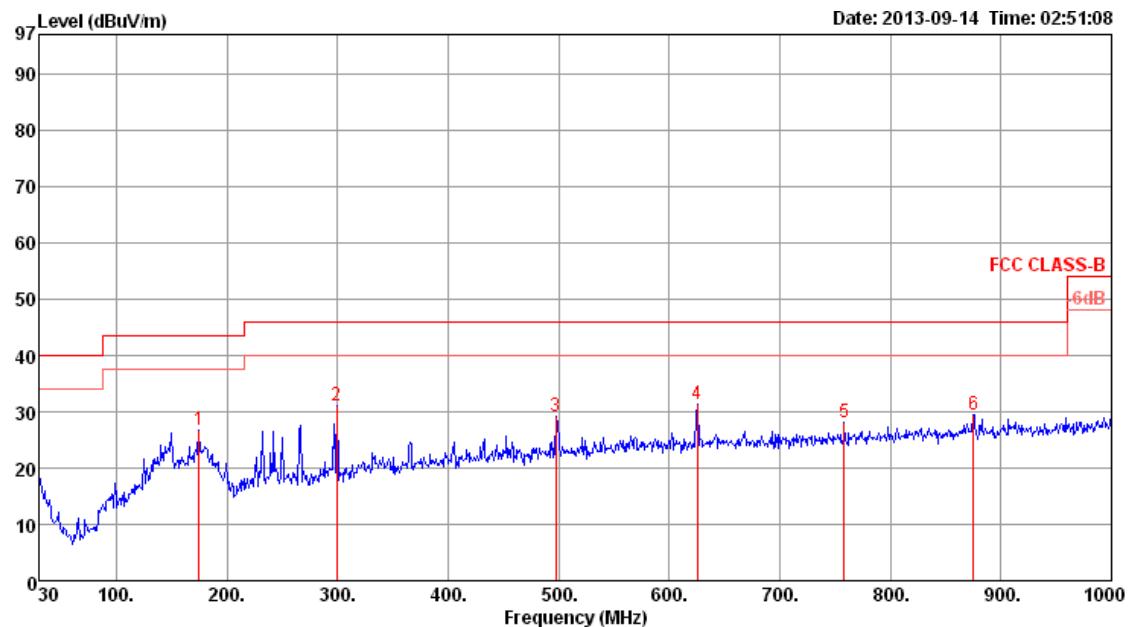**Vertical**


Freq	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
	Line	Limit	Level	Loss	Factor	Factor			
MHz	/m	/m	dB	dB	dB/m	dB	cm	deg	
1	174.53	26.66	43.50	-16.84	39.25	1.52	13.12	27.23	Peak
2	299.66	31.19	46.00	-14.81	42.70	2.03	13.36	26.90	Peak
3	497.54	29.07	46.00	-16.93	36.92	2.66	17.58	28.09	Peak
4	625.58	31.31	46.00	-14.69	37.63	2.90	18.85	28.07	Peak
5	758.47	28.06	46.00	-17.94	33.14	3.20	19.49	27.77	Peak
6	874.87	29.57	46.00	-16.43	33.22	3.46	20.34	27.45	Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.3.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

## Horizontal

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m				
1	4823.76	46.42	74.00	-27.58	45.08	3.31	33.06	35.03	Peak	100	208	HORIZONTAL
2	4823.80	31.69	54.00	-22.31	30.35	3.31	33.06	35.03	Average	100	208	HORIZONTAL

## Vertical

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m				
1	4823.73	46.65	74.00	-27.35	45.31	3.31	33.06	35.03	Peak	100	332	VERTICAL
2	4823.92	32.92	54.00	-21.08	31.58	3.31	33.06	35.03	Average	100	332	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz Ch 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									cm	deg	
1	4873.92	46.25	74.00	-27.75	44.79	3.33	33.16	35.03	Peak			100	144	HORIZONTAL
2	4874.02	31.96	54.00	-22.04	30.50	3.33	33.16	35.03	Average			100	144	HORIZONTAL
3	7309.26	48.84	74.00	-25.16	44.22	4.06	35.96	35.40	Peak			100	272	HORIZONTAL
4	7309.72	34.82	54.00	-19.18	30.20	4.06	35.96	35.40	Average			100	272	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									cm	deg	
1	4874.10	33.89	54.00	-20.11	32.43	3.33	33.16	35.03	Average			100	75	VERTICAL
2	4874.24	48.58	74.00	-25.42	47.12	3.33	33.16	35.03	Peak			100	75	VERTICAL
3	7309.20	49.46	74.00	-24.54	44.84	4.06	35.96	35.40	Peak			100	189	VERTICAL
4	7309.84	34.85	54.00	-19.15	30.23	4.06	35.96	35.40	Average			100	189	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz Ch 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
1	4923.53	45.51	74.00	-28.49	43.91	3.35	33.26	35.01	Peak	100	348	HORIZONTAL		
2	4924.36	31.58	54.00	-22.42	29.98	3.35	33.26	35.01	Average	100	348	HORIZONTAL		
3	7384.72	35.20	54.00	-18.80	30.45	4.06	36.09	35.40	Average	100	264	HORIZONTAL		
4	7386.39	49.18	74.00	-24.82	44.43	4.06	36.09	35.40	Peak	100	264	HORIZONTAL		

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
1	4923.98	45.96	74.00	-28.04	44.36	3.35	33.26	35.01	Peak	100	70	VERTICAL		
2	4924.12	32.60	54.00	-21.40	31.00	3.35	33.26	35.01	Average	100	70	VERTICAL		
3	7384.94	35.20	54.00	-18.80	30.45	4.06	36.09	35.40	Average	100	176	VERTICAL		
4	7386.85	49.58	74.00	-24.42	44.83	4.06	36.09	35.40	Peak	100	176	VERTICAL		

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	dB			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4844.14	32.02	54.00	-21.98	30.64	3.32	33.09	35.03	Average	101	237	HORIZONTAL	
2	4845.80	45.76	74.00	-28.24	44.38	3.32	33.09	35.03	Peak	101	237	HORIZONTAL	

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	dB			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4844.06	33.41	54.00	-20.59	32.03	3.32	33.09	35.03	Average	101	117	VERTICAL	
2	4844.40	46.24	74.00	-27.76	44.86	3.32	33.09	35.03	Peak	101	117	VERTICAL	

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz		dBuV/m	dBuV/m										cm	deg
1	4874.06	31.88	54.00	-22.12	30.42	3.33	33.16	35.03	Average				100	321 HORIZONTAL
2	4875.25	46.06	74.00	-27.94	44.60	3.33	33.16	35.03	Peak				100	321 HORIZONTAL
3	7309.68	34.91	54.00	-19.09	30.29	4.06	35.96	35.40	Average				100	237 HORIZONTAL
4	7312.09	49.05	74.00	-24.95	44.43	4.06	35.96	35.40	Peak				100	237 HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz		dBuV/m	dBuV/m										cm	deg
1	4873.07	46.31	74.00	-27.69	44.85	3.33	33.16	35.03	Peak				100	112 VERTICAL
2	4873.96	33.18	54.00	-20.82	31.72	3.33	33.16	35.03	Average				100	112 VERTICAL
3	7309.54	35.00	54.00	-19.00	30.38	4.06	35.96	35.40	Average				100	189 VERTICAL
4	7312.47	49.21	74.00	-24.79	44.59	4.06	35.96	35.40	Peak				100	189 VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 40MHz Ch 9 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	4900.54	44.83	74.00	-29.17	43.32	3.34	33.19	35.02	Peak	100	322 HORIZONTAL
2	4900.60	31.80	54.00	-22.20	30.29	3.34	33.19	35.02	Average	100	322 HORIZONTAL
3	7359.92	48.63	74.00	-25.37	43.91	4.06	36.06	35.40	Peak	104	231 HORIZONTAL
4	7360.86	34.70	54.00	-19.30	29.98	4.06	36.06	35.40	Average	104	231 HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	4903.80	46.12	74.00	-27.88	44.61	3.34	33.19	35.02	Peak	104	291 VERTICAL
2	4903.96	33.31	54.00	-20.69	31.80	3.34	33.19	35.02	Average	104	291 VERTICAL
3	7355.20	48.19	74.00	-25.81	43.51	4.06	36.02	35.40	Peak	104	138 VERTICAL
4	7360.74	34.74	54.00	-19.26	30.02	4.06	36.06	35.40	Average	104	138 VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1 / Chain 1
Test Date	Sep. 11, 2013	Test Mode	Mode 2

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	4823.92	38.65	54.00	-15.35	37.31	3.31	33.06	35.03	Average	100	248	HORIZONTAL
2	4824.04	47.07	74.00	-26.93	45.73	3.31	33.06	35.03	Peak	100	248	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	4823.86	49.27	74.00	-24.73	47.93	3.31	33.06	35.03	Peak	103	116	VERTICAL
2	4823.96	42.85	54.00	-11.15	41.51	3.31	33.06	35.03	Average	103	116	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 6 / Chain 1
Test Date	Sep. 11, 2013	Test Mode	Mode 2

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4873.96	48.22	74.00	-25.78	46.76	3.33	33.16	35.03	Peak	100	247	HORIZONTAL		
2	4873.99	39.02	54.00	-14.98	37.56	3.33	33.16	35.03	Average	100	247	HORIZONTAL		
3	7307.78	48.63	74.00	-25.37	44.01	4.06	35.96	35.40	Peak	100	89	HORIZONTAL		
4	7312.36	34.60	54.00	-19.40	29.98	4.06	35.96	35.40	Average	100	89	HORIZONTAL		

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4873.99	44.89	54.00	-9.11	43.43	3.33	33.16	35.03	Average	100	70	VERTICAL		
2	4874.08	48.99	74.00	-25.01	47.53	3.33	33.16	35.03	Peak	100	70	VERTICAL		
3	7309.46	34.71	54.00	-19.29	30.09	4.06	35.96	35.40	Average	100	296	VERTICAL		
4	7312.16	45.80	74.00	-28.20	41.18	4.06	35.96	35.40	Peak	100	296	VERTICAL		

<b>Temperature</b>	23°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1
<b>Test Date</b>	Sep. 12, 2013	<b>Test Mode</b>	Mode 2

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			Loss	Factor	Factor			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.14	31.37	54.00	-22.63	29.77	3.35	33.26	35.01	Average	100	328 HORIZONTAL
2	4924.77	45.74	74.00	-28.26	44.14	3.35	33.26	35.01	Peak	100	328 HORIZONTAL
3	7381.00	34.67	54.00	-19.33	29.92	4.06	36.09	35.40	Average	100	104 HORIZONTAL
4	7388.28	48.78	74.00	-25.22	44.03	4.06	36.09	35.40	Peak	100	104 HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			Loss	Factor	Factor			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.02	33.04	54.00	-20.96	31.44	3.35	33.26	35.01	Average	100	70 VERTICAL
2	4924.04	45.40	74.00	-28.60	43.80	3.35	33.26	35.01	Peak	100	70 VERTICAL
3	7381.74	35.53	54.00	-18.47	30.78	4.06	36.09	35.40	Average	100	322 VERTICAL
4	7383.34	49.14	74.00	-24.86	44.39	4.06	36.09	35.40	Peak	100	322 VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		dB	dB			Loss	Factor	Factor			
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4875.76	31.57	54.00	-22.43	30.11	3.33	33.16	35.03	Average	100	287 HORIZONTAL
2	4876.30	46.53	74.00	-27.47	45.07	3.33	33.16	35.03	Peak	100	287 HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		dB	dB			Loss	Factor	Factor			
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4875.06	45.88	74.00	-28.12	44.42	3.33	33.16	35.03	Peak	100	138 VERTICAL
2	4875.92	31.66	54.00	-22.34	30.20	3.33	33.16	35.03	Average	100	138 VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			Loss	Factor	Factor			
1	4872.67	45.88	74.00	-28.12	44.42	3.33	33.16	35.03	Peak	100	288 HORIZONTAL
2	4874.12	31.95	54.00	-22.05	30.49	3.33	33.16	35.03	Average	100	288 HORIZONTAL
3	7309.20	34.77	54.00	-19.23	30.15	4.06	35.96	35.40	Average	100	208 HORIZONTAL
4	7311.56	48.83	74.00	-25.17	44.21	4.06	35.96	35.40	Peak	100	208 HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			Loss	Factor	Factor			
1	4874.12	33.90	54.00	-20.10	32.44	3.33	33.16	35.03	Average	100	109 VERTICAL
2	4874.79	48.53	74.00	-25.47	47.07	3.33	33.16	35.03	Peak	100	109 VERTICAL
3	7308.99	48.78	74.00	-25.22	44.16	4.06	35.96	35.40	Peak	100	278 VERTICAL
4	7309.30	34.80	54.00	-19.20	30.18	4.06	35.96	35.40	Average	100	278 VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1
<b>Test Date</b>	Sep. 12, 2013	<b>Test Mode</b>	Mode 2

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	4924.00	32.42	54.00	-21.58	30.82	3.35	33.26	35.01	Average	100	252 HORIZONTAL
2	4925.85	45.74	74.00	-28.26	44.14	3.35	33.26	35.01	Peak	100	252 HORIZONTAL
3	7385.10	35.12	54.00	-18.88	30.37	4.06	36.09	35.40	Average	100	313 HORIZONTAL
4	7386.16	48.82	74.00	-25.18	44.07	4.06	36.09	35.40	Peak	100	313 HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	4921.52	45.45	74.00	-28.55	43.88	3.35	33.23	35.01	Peak	100	37 VERTICAL
2	4924.28	31.62	54.00	-22.38	30.02	3.35	33.26	35.01	Average	100	37 VERTICAL
3	7384.74	35.19	54.00	-18.81	30.44	4.06	36.09	35.40	Average	100	189 VERTICAL
4	7386.94	49.53	74.00	-24.47	44.78	4.06	36.09	35.40	Peak	100	189 VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz		dBuV/m	dBuV/m										cm	deg
1	4823.87	45.87	74.00	-28.13	44.53	3.31	33.06	35.03	Peak			124	294	HORIZONTAL
2	4824.01	36.06	54.00	-17.94	34.72	3.31	33.06	35.03	Average			124	294	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz		dBuV/m	dBuV/m										cm	deg
1	4824.03	31.91	54.00	-22.09	30.57	3.31	33.06	35.03	Average			102	40	VERTICAL
2	4824.18	43.26	74.00	-30.74	41.92	3.31	33.06	35.03	Peak			102	40	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4873.89	34.87	54.00	-19.13	33.41	3.33	33.16	35.03	Average			119	290	HORIZONTAL
2	4874.05	45.59	74.00	-28.41	44.13	3.33	33.16	35.03	Peak			119	290	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4873.78	44.36	74.00	-29.64	42.90	3.33	33.16	35.03	Peak			100	23	VERTICAL
2	4873.92	31.38	54.00	-22.62	29.92	3.33	33.16	35.03	Average			100	23	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz		dBuV/m	dBuV/m										cm	deg
1	4923.83	44.06	74.00	-29.94	42.46	3.35	33.26	35.01	Peak			121	306	HORIZONTAL
2	4923.96	32.50	54.00	-21.50	30.90	3.35	33.26	35.01	Average			121	306	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz		dBuV/m	dBuV/m										cm	deg
1	4924.34	30.17	54.00	-23.83	28.57	3.35	33.26	35.01	Average			100	183	VERTICAL
2	4924.36	43.34	74.00	-30.66	41.74	3.35	33.26	35.01	Peak			100	183	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	dB		cm	deg	
1	4844.00	36.43	54.00	-17.57	35.05	3.32	33.09	35.03	Average	124	297	HORIZONTAL
2	4844.10	45.28	74.00	-28.72	43.90	3.32	33.09	35.03	Peak	124	297	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	dB		cm	deg	
1	4843.79	43.71	74.00	-30.29	42.33	3.32	33.09	35.03	Peak	100	167	VERTICAL
2	4844.00	31.54	54.00	-22.46	30.16	3.32	33.09	35.03	Average	100	167	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4873.96	35.87	54.00	-18.13	34.41	3.33	33.16	35.03	Average		125	288	HORIZONTAL
2	4874.09	45.59	74.00	-28.41	44.13	3.33	33.16	35.03	Peak		125	288	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4873.69	43.84	74.00	-30.16	42.38	3.33	33.16	35.03	Peak		100	151	VERTICAL
2	4874.02	31.18	54.00	-22.82	29.72	3.33	33.16	35.03	Average		100	151	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 9 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	dB			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4904.00	32.23	54.00	-21.77	30.72	3.34	33.19	35.02	Average		100	226	HORIZONTAL
2	4904.09	45.77	74.00	-28.23	44.26	3.34	33.19	35.02	Peak		100	226	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	dB			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4903.85	30.67	54.00	-23.33	29.16	3.34	33.19	35.02	Average		100	182	VERTICAL
2	4903.90	44.36	74.00	-29.64	42.85	3.34	33.19	35.02	Peak		100	182	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11b CH 1 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	Limit			Cable Loss	Antenna Factor	Preamp Factor			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.98	48.09	74.00	-25.91	46.75	3.31	33.06	35.03	Peak	110	293 HORIZONTAL
2	4823.99	42.62	54.00	-11.38	41.28	3.31	33.06	35.03	Average	110	293 HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	Limit			Cable Loss	Antenna Factor	Preamp Factor			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.86	45.14	74.00	-28.86	43.80	3.31	33.06	35.03	Peak	109	35 VERTICAL
2	4823.97	36.55	54.00	-17.45	35.21	3.31	33.06	35.03	Average	109	35 VERTICAL



Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11b CH 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4873.93	48.73	74.00	-25.27	47.27	3.33	33.16	35.03	Peak			124	289	HORIZONTAL
2	4873.96	43.91	54.00	-10.09	42.45	3.33	33.16	35.03	Average			124	289	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4873.98	37.45	54.00	-16.55	35.99	3.33	33.16	35.03	Average			100	15	VERTICAL
2	4874.02	45.97	74.00	-28.03	44.51	3.33	33.16	35.03	Peak			100	15	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11b CH 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4924.02	46.06	74.00	-27.94	44.46	3.35	33.26	35.01	Peak			120	288	HORIZONTAL
2	4924.03	37.46	54.00	-16.54	35.86	3.35	33.26	35.01	Average			120	288	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4923.99	43.05	74.00	-30.95	41.45	3.35	33.26	35.01	Peak			108	20	VERTICAL
2	4924.05	31.09	54.00	-22.91	29.49	3.35	33.26	35.01	Average			108	20	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 1 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	cm	deg
		Limit	Over Line			Cable Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB					
1	4823.98	35.26	54.00	-18.74	33.92	3.31	33.06	35.03	Average	109	311	HORIZONTAL
2	4823.99	45.89	74.00	-28.11	44.55	3.31	33.06	35.03	Peak	109	311	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	cm	deg
		Limit	Over Line			Cable Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB					
1	4824.00	31.85	54.00	-22.15	30.51	3.31	33.06	35.03	Average	100	40	VERTICAL
2	4824.14	44.33	74.00	-29.67	42.99	3.31	33.06	35.03	Peak	100	40	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4873.88	46.11	74.00	-27.89	44.65	3.33	33.16	35.03	Peak		123	287	HORIZONTAL
2	4874.00	35.21	54.00	-18.79	33.75	3.33	33.16	35.03	Average		123	287	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4873.94	43.98	74.00	-30.02	42.52	3.33	33.16	35.03	Peak		100	22	VERTICAL
2	4873.98	31.28	54.00	-22.72	29.82	3.33	33.16	35.03	Average		100	22	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.96	44.28	74.00	-29.72	42.68	3.35	33.26	35.01 Peak	118	288	HORIZONTAL
2	4924.00	32.78	54.00	-21.22	31.18	3.35	33.26	35.01 Average	118	288	HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.82	30.30	54.00	-23.70	28.70	3.35	33.26	35.01 Average	100	192	VERTICAL
2	4923.98	43.38	74.00	-30.62	41.78	3.35	33.26	35.01 Peak	100	192	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4823.67	42.69	74.00	-31.31	41.35	3.31	33.06	35.03	Peak		100	186	HORIZONTAL
2	4824.08	29.81	54.00	-24.19	28.47	3.31	33.06	35.03	Average		100	186	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4823.80	42.88	74.00	-31.12	41.54	3.31	33.06	35.03	Peak		100	284	VERTICAL
2	4824.27	30.01	54.00	-23.99	28.67	3.31	33.06	35.03	Average		100	284	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz Ch 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
1	4873.93	31.16	54.00	-22.84	29.70	3.33	33.16	35.03	Average			100	124	HORIZONTAL
2	4874.14	43.11	74.00	-30.89	41.65	3.33	33.16	35.03	Peak			100	124	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dB	dB	dB/m						
1	4873.91	32.19	54.00	-21.81	30.73	3.33	33.16	35.03	Average			100	230	VERTICAL
2	4874.43	45.31	74.00	-28.69	43.85	3.33	33.16	35.03	Peak			100	230	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz Ch 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									cm	deg	
1	4923.69	29.82	54.00	-24.18	28.22	3.35	33.26	35.01	Average			100	277	HORIZONTAL
2	4924.34	42.66	74.00	-31.34	41.06	3.35	33.26	35.01	Peak			100	277	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB									cm	deg	
1	4924.08	30.85	54.00	-23.15	29.25	3.35	33.26	35.01	Average			100	213	VERTICAL
2	4924.16	44.72	74.00	-29.28	43.12	3.35	33.26	35.01	Peak			100	213	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	dB			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4843.54	30.02	54.00	-23.98	28.64	3.32	33.09	35.03	Average		100	160	HORIZONTAL
2	4843.54	42.85	74.00	-31.15	41.47	3.32	33.09	35.03	Peak		100	160	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	dB			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4843.70	30.33	54.00	-23.67	28.95	3.32	33.09	35.03	Average		100	84	VERTICAL
2	4843.86	44.10	74.00	-29.90	42.72	3.32	33.09	35.03	Peak		100	84	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4873.71	43.55	74.00	-30.45	42.09	3.33	33.16	35.03	Peak		100	314	HORIZONTAL
2	4874.08	30.12	54.00	-23.88	28.66	3.33	33.16	35.03	Average		100	314	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	4873.86	43.05	74.00	-30.95	41.59	3.33	33.16	35.03	Peak		100	254	VERTICAL
2	4874.03	31.64	54.00	-22.36	30.18	3.33	33.16	35.03	Average		100	254	VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 40MHz Ch 9 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4903.59	43.02	74.00	-30.98	41.51	3.34	33.19	35.02	Peak			100	124	HORIZONTAL
2	4903.73	29.93	54.00	-24.07	28.42	3.34	33.19	35.02	Average			100	124	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4903.78	43.80	74.00	-30.20	42.29	3.34	33.19	35.02	Peak			100	176	VERTICAL
2	4904.15	30.98	54.00	-23.02	29.47	3.34	33.19	35.02	Average			100	176	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg
1	4823.44	45.13	74.00	-28.87	43.79	3.31	33.06	35.03	Peak	100	250 HORIZONTAL
2	4823.82	30.89	54.00	-23.11	29.55	3.31	33.06	35.03	Average	100	250 HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg
1	4823.55	46.44	74.00	-27.56	45.10	3.31	33.06	35.03	Peak	100	324 VERTICAL
2	4823.95	34.42	54.00	-19.58	33.08	3.31	33.06	35.03	Average	100	324 VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			Loss	Factor	Factor			
1	4873.18	31.41	54.00	-22.59	29.95	3.33	33.16	35.03	Average	100	298 HORIZONTAL
2	4873.18	45.08	74.00	-28.92	43.62	3.33	33.16	35.03	Peak	100	298 HORIZONTAL
3	7310.56	34.51	54.00	-19.49	29.89	4.06	35.96	35.40	Average	100	306 HORIZONTAL
4	7310.87	49.18	74.00	-24.82	44.56	4.06	35.96	35.40	Peak	100	306 HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			Loss	Factor	Factor			
1	4874.00	34.72	54.00	-19.28	33.26	3.33	33.16	35.03	Average	100	143 VERTICAL
2	4874.06	46.42	74.00	-27.58	44.96	3.33	33.16	35.03	Peak	100	143 VERTICAL
3	7310.22	34.43	54.00	-19.57	29.81	4.06	35.96	35.40	Average	100	217 VERTICAL
4	7311.59	48.63	74.00	-25.37	44.01	4.06	35.96	35.40	Peak	100	217 VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.82	31.38	54.00	-22.62	29.78	3.35	33.26	35.01	Average	100	346 HORIZONTAL
2	4924.92	45.67	74.00	-28.33	44.07	3.35	33.26	35.01	Peak	100	346 HORIZONTAL
3	7385.10	35.01	54.00	-18.99	30.26	4.06	36.09	35.40	Average	100	300 HORIZONTAL
4	7386.29	49.14	74.00	-24.86	44.39	4.06	36.09	35.40	Peak	100	300 HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4924.04	37.20	54.00	-16.80	35.60	3.35	33.26	35.01	Average	114	159 VERTICAL
2	4924.10	48.19	74.00	-25.81	46.59	3.35	33.26	35.01	Peak	114	159 VERTICAL
3	7385.14	35.02	54.00	-18.98	30.27	4.06	36.09	35.40	Average	100	205 VERTICAL
4	7385.48	49.17	74.00	-24.83	44.42	4.06	36.09	35.40	Peak	100	205 VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	cm	deg	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB					
1	4824.08	28.81	54.00	-25.19	27.47	3.31	33.06	35.03	Average	100	166	HORIZONTAL		
2	4824.36	42.40	74.00	-31.60	41.06	3.31	33.06	35.03	Peak	100	166	HORIZONTAL		

**Vertical**

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	cm	deg	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB					
1	4823.97	32.61	54.00	-21.39	31.27	3.31	33.06	35.03	Average	116	329	VERTICAL		
2	4824.02	43.95	74.00	-30.05	42.61	3.31	33.06	35.03	Peak	116	329	VERTICAL		

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 6 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos
		Line	Limit			Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4873.74	44.01	74.00	-29.99	42.55	3.33	33.16	35.03	Peak		100	216 HORIZONTAL
2	4873.95	31.46	54.00	-22.54	30.00	3.33	33.16	35.03	Average		100	216 HORIZONTAL

**Vertical**

Freq	Level	Limit		Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos
		Line	Limit			Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4874.02	47.97	74.00	-26.03	46.51	3.33	33.16	35.03	Peak		100	293 VERTICAL
2	4874.10	33.30	54.00	-20.70	31.84	3.33	33.16	35.03	Average		100	293 VERTICAL

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4923.92	42.99	74.00	-31.01	41.39	3.35	33.26	35.01	Peak			100	214	HORIZONTAL
2	4924.11	29.99	54.00	-24.01	28.39	3.35	33.26	35.01	Average			100	214	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	4923.90	32.99	54.00	-21.01	31.39	3.35	33.26	35.01	Average			100	158	VERTICAL
2	4924.33	46.13	74.00	-27.87	44.53	3.35	33.26	35.01	Peak			100	158	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.4. Emissions Measurement

### 4.4.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

### 4.4.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.3.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit. Only worst data of each operating mode is presented.

#### **4.4.4. Test Setup Layout**

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.3.3.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.3.4.

#### **4.4.5. Test Deviation**

There is no deviation with the original standard.

#### **4.4.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

##### Channel 1

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			Loss	dB	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	dB		cm	deg	
1	2389.80	63.09	74.00	-10.91	32.70	2.22	28.17	0.00	Peak	107	291	HORIZONTAL
2	2390.00	48.20	54.00	-5.80	17.81	2.22	28.17	0.00	Average	107	291	HORIZONTAL
3	2406.40	97.84			67.41	2.22	28.21	0.00	Average	107	291	HORIZONTAL
4	2406.60	108.54			78.11	2.22	28.21	0.00	Peak	107	291	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			Loss	dB	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	dB		cm	deg	
1	2387.60	56.56	74.00	-17.44	26.18	2.21	28.17	0.00	Peak	110	290	HORIZONTAL
2	2390.00	44.84	54.00	-9.16	14.45	2.22	28.17	0.00	Average	110	290	HORIZONTAL
3	2431.40	101.90			71.42	2.23	28.25	0.00	Average	110	290	HORIZONTAL
4	2431.40	112.39			81.91	2.23	28.25	0.00	Peak	110	290	HORIZONTAL
5	2483.50	44.97	54.00	-9.03	14.33	2.26	28.38	0.00	Average	110	290	HORIZONTAL
6	2483.50	56.26	74.00	-17.74	25.62	2.26	28.38	0.00	Peak	110	290	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

##### Channel 11

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			Loss	dB	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	dB		cm	deg	
1	2467.40	95.20			64.61	2.26	28.33	0.00	Average	106	308	HORIZONTAL
2	2467.80	105.70			75.11	2.26	28.33	0.00	Peak	106	308	HORIZONTAL
3	2483.50	45.49	54.00	-8.51	14.85	2.26	28.38	0.00	Average	106	308	HORIZONTAL
4	2486.30	57.84	74.00	-16.16	27.16	2.26	28.42	0.00	Peak	106	308	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1
<b>Test Date</b>	Sep. 12, 2013	<b>Test Mode</b>	Mode 2

### Channel 3

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	2390.00	50.09	54.00	-3.91	19.70	2.22	28.17	0.00	Average	107	312	HORIZONTAL
2	2390.00	62.85	74.00	-11.15	32.46	2.22	28.17	0.00	Peak	107	312	HORIZONTAL
3	2426.40	94.60			64.12	2.23	28.25	0.00	Average	107	312	HORIZONTAL
4	2429.20	105.12			74.64	2.23	28.25	0.00	Peak	107	312	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	2390.00	48.13	54.00	-5.87	17.74	2.22	28.17	0.00	Average	108	310	HORIZONTAL
2	2390.00	64.01	74.00	-9.99	33.62	2.22	28.17	0.00	Peak	108	310	HORIZONTAL
3	2433.40	98.51			68.03	2.23	28.25	0.00	Average	108	310	HORIZONTAL
4	2433.40	108.96			78.48	2.23	28.25	0.00	Peak	108	310	HORIZONTAL
5	2483.50	48.18	54.00	-5.82	17.54	2.26	28.38	0.00	Average	108	310	HORIZONTAL
6	2485.50	62.21	74.00	-11.79	31.53	2.26	28.42	0.00	Peak	108	310	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 9

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor		cm	deg	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	2435.60	104.74			74.22	2.23	28.29	0.00	Peak	109	309	HORIZONTAL
2	2436.40	93.79			63.27	2.23	28.29	0.00	Average	109	309	HORIZONTAL
3	2483.50	46.09	54.00	-7.91	15.45	2.26	28.38	0.00	Average	109	309	HORIZONTAL
4	2487.90	58.80	74.00	-15.20	28.12	2.26	28.42	0.00	Peak	109	309	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

**Channel 1**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB				cm	deg	
1	2385.80	58.29	74.00	-15.71	27.91	2.21	28.17	0.00	Peak			105	311	HORIZONTAL
2	2386.20	47.79	54.00	-6.21	17.41	2.21	28.17	0.00	Average			105	311	HORIZONTAL
3	2411.00	109.57			79.14	2.22	28.21	0.00	Peak			105	311	HORIZONTAL
4	2411.20	105.10			74.67	2.22	28.21	0.00	Average			105	311	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m				cm	deg	
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB				cm	deg	
1	2374.00	56.59	74.00	-17.41	26.25	2.21	28.13	0.00	Peak			109	309	HORIZONTAL
2	2390.00	45.11	54.00	-8.89	14.72	2.22	28.17	0.00	Average			109	309	HORIZONTAL
3	2435.80	111.42			80.90	2.23	28.29	0.00	Peak			109	309	HORIZONTAL
4	2436.20	106.88			76.36	2.23	28.29	0.00	Average			109	309	HORIZONTAL
5	2483.50	44.89	54.00	-9.11	14.25	2.26	28.38	0.00	Average			109	309	HORIZONTAL
6	2483.90	56.40	74.00	-17.60	25.76	2.26	28.38	0.00	Peak			109	309	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m				cm	deg	
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB				cm	deg	
1	2462.80	102.06			71.49	2.24	28.33	0.00	Average			108	301	HORIZONTAL
2	2463.20	106.73			76.16	2.24	28.33	0.00	Peak			108	301	HORIZONTAL
3	2484.30	57.81	74.00	-16.19	27.17	2.26	28.38	0.00	Peak			108	301	HORIZONTAL
4	2484.90	45.16	54.00	-8.84	14.52	2.26	28.38	0.00	Average			108	301	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 2

### Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	2389.80	64.46	74.00	-9.54	34.07	2.22	28.17	0.00	Peak			145	91	HORIZONTAL
2	2390.00	50.19	54.00	-3.81	19.80	2.22	28.17	0.00	Average			145	91	HORIZONTAL
3	2406.00	111.48			81.05	2.22	28.21	0.00	Peak			145	91	HORIZONTAL
4	2407.00	101.04			70.61	2.22	28.21	0.00	Average			145	91	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	2389.20	56.82	74.00	-17.18	26.44	2.21	28.17	0.00	Peak			108	293	HORIZONTAL
2	2390.00	44.72	54.00	-9.28	14.33	2.22	28.17	0.00	Average			108	293	HORIZONTAL
3	2430.20	102.43			71.95	2.23	28.25	0.00	Average			108	293	HORIZONTAL
4	2433.00	112.56			82.08	2.23	28.25	0.00	Peak			108	293	HORIZONTAL
5	2483.50	44.83	54.00	-9.17	14.19	2.26	28.38	0.00	Average			108	293	HORIZONTAL
6	2487.50	57.15	74.00	-16.85	26.47	2.26	28.42	0.00	Peak			108	293	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	2455.60	108.17			77.60	2.24	28.33	0.00	Peak			106	291	HORIZONTAL
2	2467.20	97.88			67.29	2.26	28.33	0.00	Average			106	291	HORIZONTAL
3	2483.50	46.71	54.00	-7.29	16.07	2.26	28.38	0.00	Average			106	291	HORIZONTAL
4	2483.70	61.10	74.00	-12.90	30.46	2.26	28.38	0.00	Peak			106	291	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	23°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Chain 1
<b>Test Date</b>	Sep. 12, 2013	<b>Test Mode</b>	Mode 3

**Channel 1**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
1	2390.00	46.53	54.00	-7.47	16.14	2.22	28.17	0.00	Average	147	95	HORIZONTAL		
2	2390.00	59.62	74.00	-14.38	29.23	2.22	28.17	0.00	Peak	147	95	HORIZONTAL		
3	2406.20	96.58			66.15	2.22	28.21	0.00	Average	147	95	HORIZONTAL		
4	2409.00	106.67			76.24	2.22	28.21	0.00	Peak	147	95	HORIZONTAL		

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
1	2388.40	55.27	74.00	-18.73	24.89	2.21	28.17	0.00	Peak	164	255	HORIZONTAL		
2	2390.00	43.66	54.00	-10.34	13.27	2.22	28.17	0.00	Average	164	255	HORIZONTAL		
3	2443.80	100.42			69.89	2.24	28.29	0.00	Average	164	255	HORIZONTAL		
4	2443.80	110.29			79.76	2.24	28.29	0.00	Peak	164	255	HORIZONTAL		
5	2483.50	43.75	54.00	-10.25	13.11	2.26	28.38	0.00	Average	164	255	HORIZONTAL		
6	2485.90	55.61	74.00	-18.39	24.93	2.26	28.42	0.00	Peak	164	255	HORIZONTAL		

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
1	2468.80	107.35			76.71	2.26	28.38	0.00	Peak	137	244	HORIZONTAL		
2	2469.00	97.81			67.17	2.26	28.38	0.00	Average	137	244	HORIZONTAL		
3	2483.50	45.79	54.00	-8.21	15.15	2.26	28.38	0.00	Average	137	244	HORIZONTAL		
4	2483.70	56.79	74.00	-17.21	26.15	2.26	28.38	0.00	Peak	137	244	HORIZONTAL		

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1
<b>Test Date</b>	Sep. 12, 2013	<b>Test Mode</b>	Mode 3

### Channel 3

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.80	58.65	74.00	-15.35	28.27	2.21	28.17	0.00	Peak	142	270	HORIZONTAL
2	2390.00	47.48	54.00	-6.52	17.09	2.22	28.17	0.00	Average	142	270	HORIZONTAL
3	2423.60	93.94			63.46	2.23	28.25	0.00	Average	142	270	HORIZONTAL
4	2432.40	103.68			73.20	2.23	28.25	0.00	Peak	142	270	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.80	61.07	74.00	-12.93	30.69	2.21	28.17	0.00	Peak	165	283	HORIZONTAL
2	2390.00	46.89	54.00	-7.11	16.50	2.22	28.17	0.00	Average	165	283	HORIZONTAL
3	2423.40	97.11			66.63	2.23	28.25	0.00	Average	165	283	HORIZONTAL
4	2423.40	107.00			76.52	2.23	28.25	0.00	Peak	165	283	HORIZONTAL
5	2483.50	47.12	54.00	-6.88	16.48	2.26	28.38	0.00	Average	165	283	HORIZONTAL
6	2485.90	60.82	74.00	-13.18	30.14	2.26	28.42	0.00	Peak	165	283	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 9

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2450.00	93.89			63.36	2.24	28.29	0.00	Average	137	281	HORIZONTAL
2	2450.00	103.79			73.26	2.24	28.29	0.00	Peak	137	281	HORIZONTAL
3	2483.50	47.42	54.00	-6.58	16.78	2.26	28.38	0.00	Average	137	281	HORIZONTAL
4	2487.90	60.44	74.00	-13.56	29.76	2.26	28.42	0.00	Peak	137	281	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	23°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	Serway Li	<b>Configurations</b>	IEEE 802.11b CH 1, 6, 11 / Chain 1
<b>Test Date</b>	Sep. 12, 2013	<b>Test Mode</b>	Mode 3

**Channel 1**

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
MHz		dBuV/m	dBuV/m	dB					cm	deg	
1	2386.00	45.08	54.00	-8.92	14.70	2.21	28.17	0.00	Average	119	271 HORIZONTAL
2	2386.60	55.37	74.00	-18.63	24.99	2.21	28.17	0.00	Peak	119	271 HORIZONTAL
3	2411.20	104.39			73.96	2.22	28.21	0.00	Average	119	271 HORIZONTAL
4	2413.00	108.27			77.84	2.22	28.21	0.00	Peak	119	271 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
MHz		dBuV/m	dBuV/m	dB					cm	deg	
1	2388.40	54.73	74.00	-19.27	24.35	2.21	28.17	0.00	Peak	163	256 HORIZONTAL
2	2389.60	43.69	54.00	-10.31	13.31	2.21	28.17	0.00	Average	163	256 HORIZONTAL
3	2438.20	109.75			79.23	2.23	28.29	0.00	Peak	163	256 HORIZONTAL
4	2438.60	105.69			75.17	2.23	28.29	0.00	Average	163	256 HORIZONTAL
5	2483.90	43.81	54.00	-10.19	13.17	2.26	28.38	0.00	Average	163	256 HORIZONTAL
6	2484.30	53.95	74.00	-20.05	23.31	2.26	28.38	0.00	Peak	163	256 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
MHz		dBuV/m	dBuV/m	dB					cm	deg	
1	2463.00	108.28			77.71	2.24	28.33	0.00	Peak	136	279 HORIZONTAL
2	2463.80	104.32			73.75	2.24	28.33	0.00	Average	136	279 HORIZONTAL
3	2486.10	57.42	74.00	-16.58	26.74	2.26	28.42	0.00	Peak	136	279 HORIZONTAL
4	2487.90	46.67	54.00	-7.33	15.99	2.26	28.42	0.00	Average	136	279 HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	64%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 3

**Channel 1**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	2389.40	59.50	74.00	-14.50	29.12	2.21	28.17	0.00	Peak	145	99	HORIZONTAL		
2	2390.00	47.28	54.00	-6.72	16.89	2.22	28.17	0.00	Average	145	99	HORIZONTAL		
3	2405.60	99.21			68.78	2.22	28.21	0.00	Average	145	99	HORIZONTAL		
4	2406.20	108.36			77.93	2.22	28.21	0.00	Peak	145	99	HORIZONTAL		

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	2390.00	43.67	54.00	-10.33	13.28	2.22	28.17	0.00	Average	166	253	HORIZONTAL		
2	2390.00	54.12	74.00	-19.88	23.73	2.22	28.17	0.00	Peak	166	253	HORIZONTAL		
3	2443.40	100.68			70.15	2.24	28.29	0.00	Average	166	253	HORIZONTAL		
4	2444.20	110.16			79.63	2.24	28.29	0.00	Peak	166	253	HORIZONTAL		
5	2484.70	55.05	74.00	-18.95	24.41	2.26	28.38	0.00	Peak	166	253	HORIZONTAL		
6	2493.50	43.83	54.00	-10.17	13.14	2.27	28.42	0.00	Average	166	253	HORIZONTAL		

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	2468.40	100.11			69.47	2.26	28.38	0.00	Average	137	243	HORIZONTAL		
2	2469.00	109.44			78.80	2.26	28.38	0.00	Peak	137	243	HORIZONTAL		
3	2483.50	47.49	54.00	-6.51	16.85	2.26	28.38	0.00	Average	137	243	HORIZONTAL		
4	2483.50	61.72	74.00	-12.28	31.08	2.26	28.38	0.00	Peak	137	243	HORIZONTAL		

Item 1, 2 are the fundamental frequency at 2462 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

### Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
1	2389.80	58.99	74.00	-15.01	28.60	2.22	28.17	0.00	Peak	101	286	VERTICAL		
2	2390.00	45.83	54.00	-8.17	15.44	2.22	28.17	0.00	Average	101	286	VERTICAL		
3	2417.40	95.06			64.58	2.23	28.25	0.00	Average	101	286	VERTICAL		
4	2418.00	105.55			75.07	2.23	28.25	0.00	Peak	101	286	VERTICAL		

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
1	2384.00	55.78	74.00	-18.22	25.40	2.21	28.17	0.00	Peak	101	286	VERTICAL		
2	2390.00	44.45	54.00	-9.55	14.06	2.22	28.17	0.00	Average	101	286	VERTICAL		
3	2443.80	97.32			66.79	2.24	28.29	0.00	Average	101	286	VERTICAL		
4	2444.20	107.71			77.18	2.24	28.29	0.00	Peak	101	286	VERTICAL		
5	2483.50	44.59	54.00	-9.41	13.96	2.26	28.37	0.00	Average	101	286	VERTICAL		
6	2483.50	56.43	74.00	-17.57	25.80	2.26	28.37	0.00	Peak	101	286	VERTICAL		

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
1	2467.40	94.66			64.07	2.26	28.33	0.00	Average	101	286	VERTICAL		
2	2467.60	105.10			74.51	2.26	28.33	0.00	Peak	101	286	VERTICAL		
3	2483.50	45.23	54.00	-8.77	14.60	2.26	28.37	0.00	Average	101	286	VERTICAL		
4	2485.90	57.42	74.00	-16.58	26.75	2.26	28.41	0.00	Peak	101	286	VERTICAL		

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

### Channel 3

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	dB				cm	deg	
1	2389.20	60.05	74.00	-13.95	29.67	2.21	28.17	0.00	Peak			100	286	VERTICAL
2	2390.00	47.65	54.00	-6.35	17.26	2.22	28.17	0.00	Average			100	286	VERTICAL
3	2418.40	92.68			62.20	2.23	28.25	0.00	Average			100	286	VERTICAL
4	2418.80	103.28			72.80	2.23	28.25	0.00	Peak			100	286	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m				cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	dB				cm	deg	
1	2390.00	47.75	54.00	-6.25	17.36	2.22	28.17	0.00	Average			100	289	VERTICAL
2	2390.00	62.83	74.00	-11.17	32.44	2.22	28.17	0.00	Peak			100	289	VERTICAL
3	2421.00	106.16			75.68	2.23	28.25	0.00	Peak			100	289	VERTICAL
4	2421.80	95.69			65.21	2.23	28.25	0.00	Average			100	289	VERTICAL
5	2485.10	62.44	74.00	-11.56	31.77	2.26	28.41	0.00	Peak			100	289	VERTICAL
6	2487.10	46.84	54.00	-7.16	16.17	2.26	28.41	0.00	Average			100	289	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 9

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m				cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	dB				cm	deg	
1	2449.20	102.17			71.64	2.24	28.29	0.00	Peak			100	291	VERTICAL
2	2450.40	92.02			61.49	2.24	28.29	0.00	Average			100	291	VERTICAL
3	2487.90	59.70	74.00	-14.30	29.03	2.26	28.41	0.00	Peak			100	291	VERTICAL
4	2489.90	46.70	54.00	-7.30	16.03	2.26	28.41	0.00	Average			100	291	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	64%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1
Test Date	Sep. 12, 2013	Test Mode	Mode 4

## Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	2386.00	45.95	54.00	-8.05	15.57	2.21	28.17	0.00	Average	101	290	VERTICAL		
2	2388.40	56.68	74.00	-17.32	26.30	2.21	28.17	0.00	Peak	101	290	VERTICAL		
3	2411.20	103.79			73.36	2.22	28.21	0.00	Average	101	290	VERTICAL		
4	2413.20	108.30			77.87	2.22	28.21	0.00	Peak	101	290	VERTICAL		

Item 3, 4 are the fundamental frequency at 2412 MHz.

## Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	2384.40	57.38	74.00	-16.62	27.00	2.21	28.17	0.00	Peak	101	288	VERTICAL		
2	2390.00	44.80	54.00	-9.20	14.41	2.22	28.17	0.00	Average	101	288	VERTICAL		
3	2437.80	103.73			73.21	2.23	28.29	0.00	Average	101	288	VERTICAL		
4	2438.20	108.39			77.87	2.23	28.29	0.00	Peak	101	288	VERTICAL		
5	2488.70	57.20	74.00	-16.80	26.53	2.26	28.41	0.00	Peak	101	288	VERTICAL		
6	2492.30	45.35	54.00	-8.65	14.67	2.27	28.41	0.00	Average	101	288	VERTICAL		

Item 3, 4 are the fundamental frequency at 2437 MHz.

## Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
1	2462.80	102.43			71.86	2.24	28.33	0.00	Average	100	288	VERTICAL		
2	2463.20	107.14			76.57	2.24	28.33	0.00	Peak	100	288	VERTICAL		
3	2485.50	57.48	74.00	-16.52	26.81	2.26	28.41	0.00	Peak	100	288	VERTICAL		
4	2488.30	46.58	54.00	-7.42	15.91	2.26	28.41	0.00	Average	100	288	VERTICAL		

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	64%
<b>Test Engineer</b>	YC Chen	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1
<b>Test Date</b>	Sep. 12, 2013	<b>Test Mode</b>	Mode 4

**Channel 1**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	2389.80	60.95	74.00	-13.05	30.56	2.22	28.17	0.00	Peak			101	288	VERTICAL
2	2390.00	47.44	54.00	-6.56	17.05	2.22	28.17	0.00	Average			101	288	VERTICAL
3	2416.80	108.61			78.17	2.23	28.21	0.00	Peak			101	288	VERTICAL
4	2417.80	98.48			68.00	2.23	28.25	0.00	Average			101	288	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	2372.40	56.45	74.00	-17.55	26.11	2.21	28.13	0.00	Peak			101	291	VERTICAL
2	2390.00	44.65	54.00	-9.35	14.26	2.22	28.17	0.00	Average			101	291	VERTICAL
3	2438.60	107.34			76.82	2.23	28.29	0.00	Peak			101	291	VERTICAL
4	2444.20	97.51			66.98	2.24	28.29	0.00	Average			101	291	VERTICAL
5	2489.90	45.47	54.00	-8.53	14.80	2.26	28.41	0.00	Average			101	291	VERTICAL
6	2493.10	57.24	74.00	-16.76	26.56	2.27	28.41	0.00	Peak			101	291	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz													cm	deg
1	2466.20	98.05			67.48	2.24	28.33	0.00	Average			101	287	VERTICAL
2	2466.60	108.09			77.50	2.26	28.33	0.00	Peak			101	287	VERTICAL
3	2483.50	47.14	54.00	-6.86	16.51	2.26	28.37	0.00	Average			101	287	VERTICAL
4	2483.50	61.02	74.00	-12.98	30.39	2.26	28.37	0.00	Peak			101	287	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level / Test Mode: Mode 2

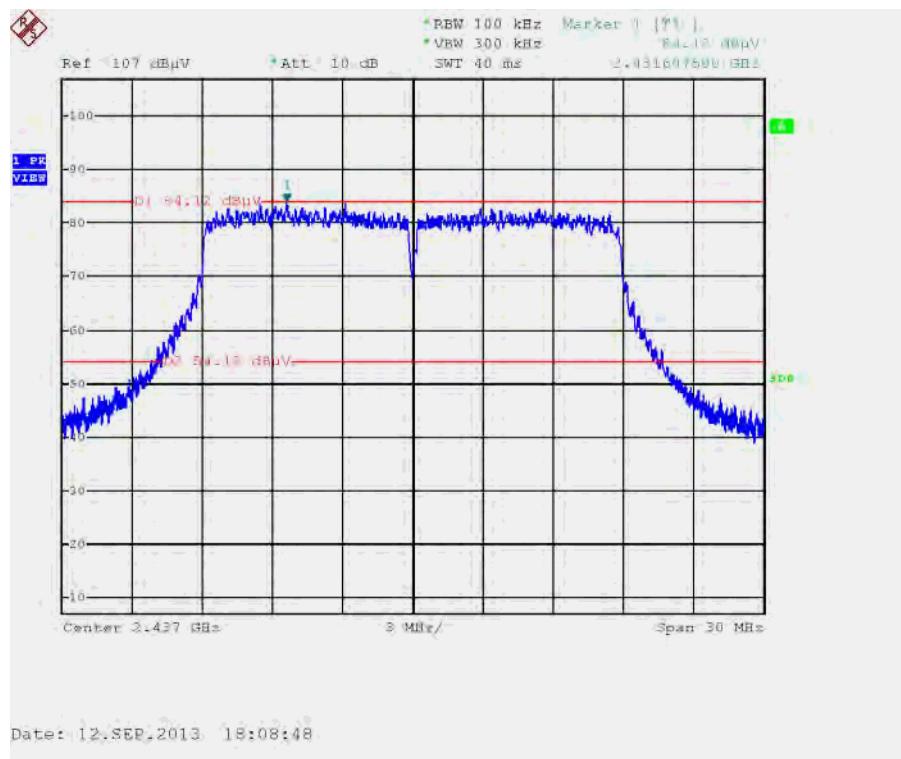


Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc)

/ Test Mode: Mode 2

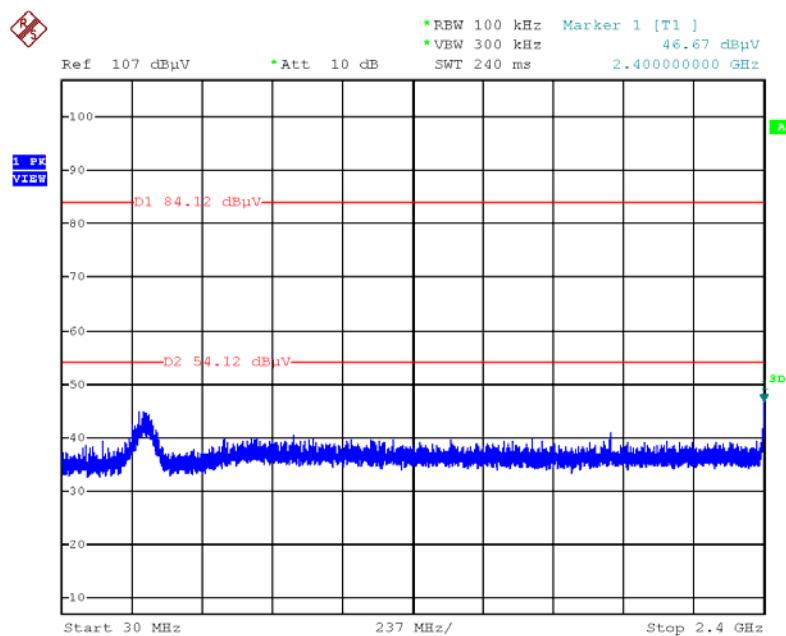

**Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)**


/ Test Mode: Mode 2

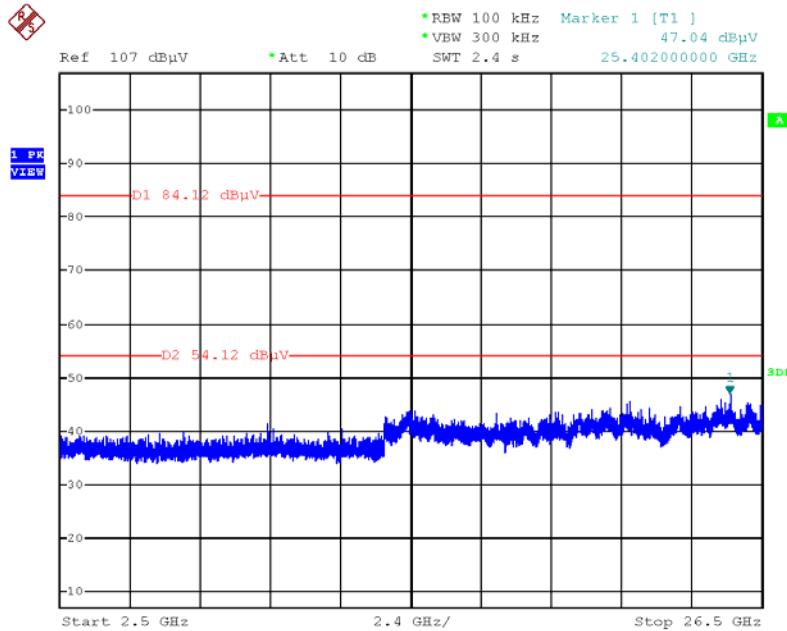

Date: 12.SEP.2013 18:10:19

**Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)**


/ Test Mode: Mode 2

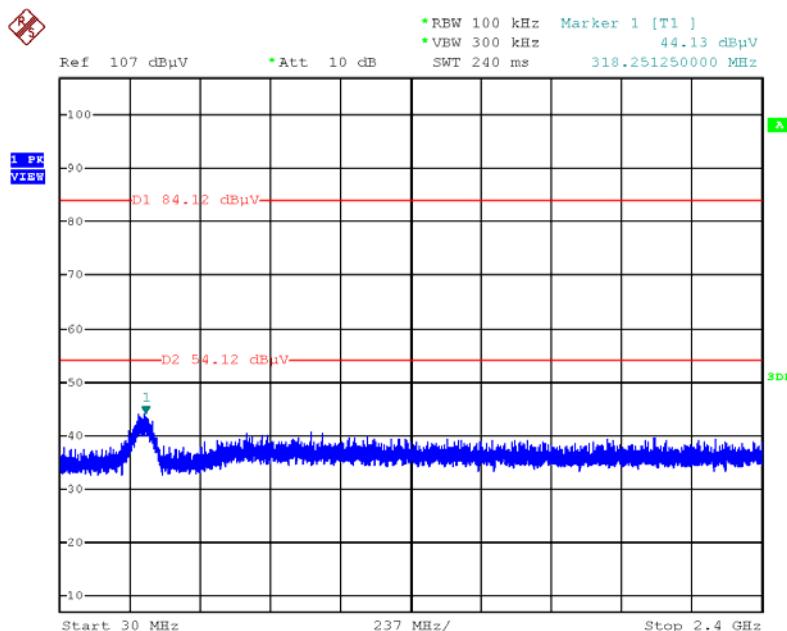



Date: 12.SEP.2013 18:11:25


**Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 2**

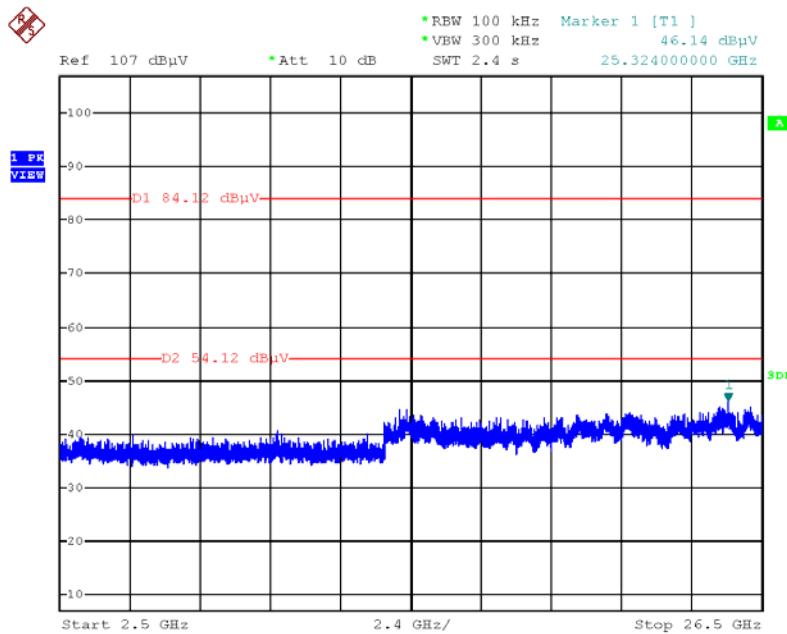


Date: 12.SEP.2013 18:12:07

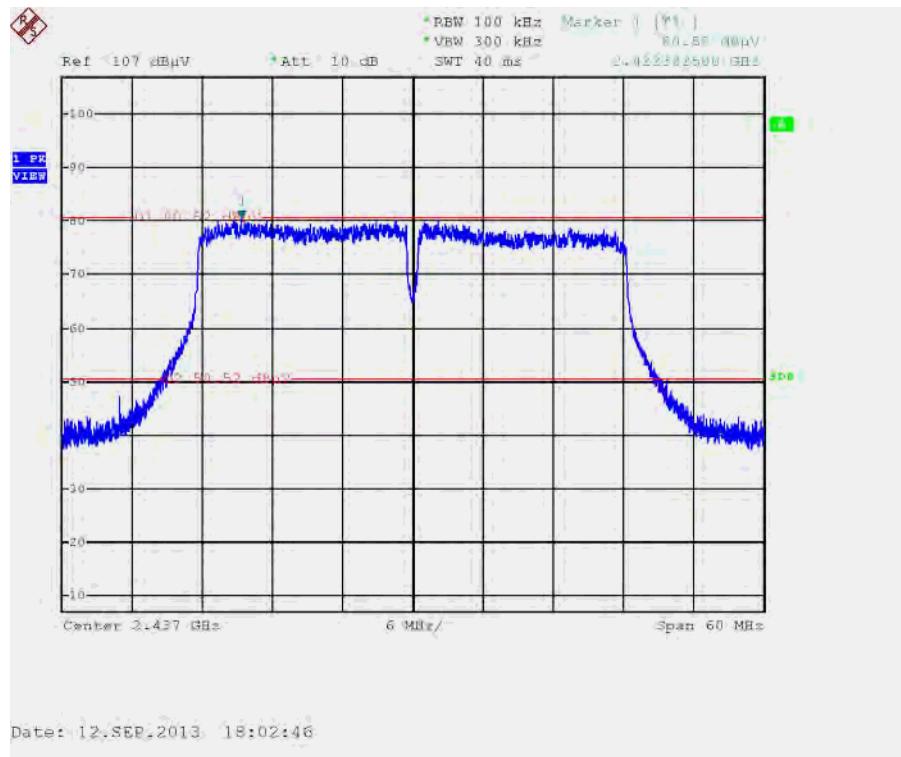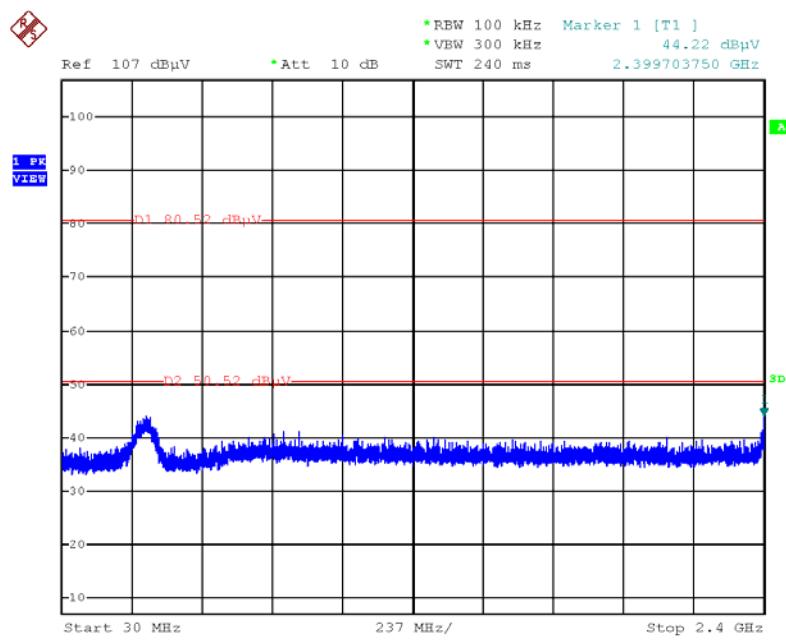**Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level / Test Mode: Mode 2**

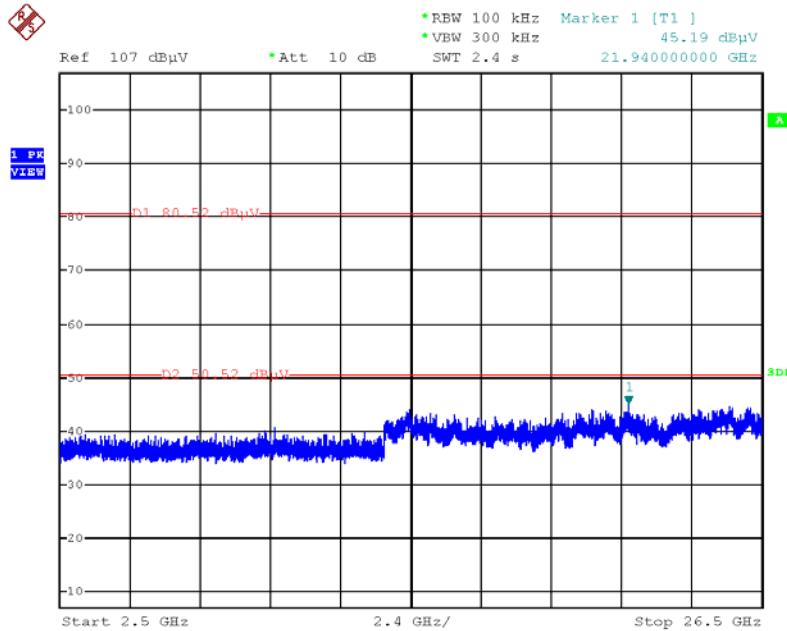**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 2**


**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc)**
**/ Test Mode: Mode 2**

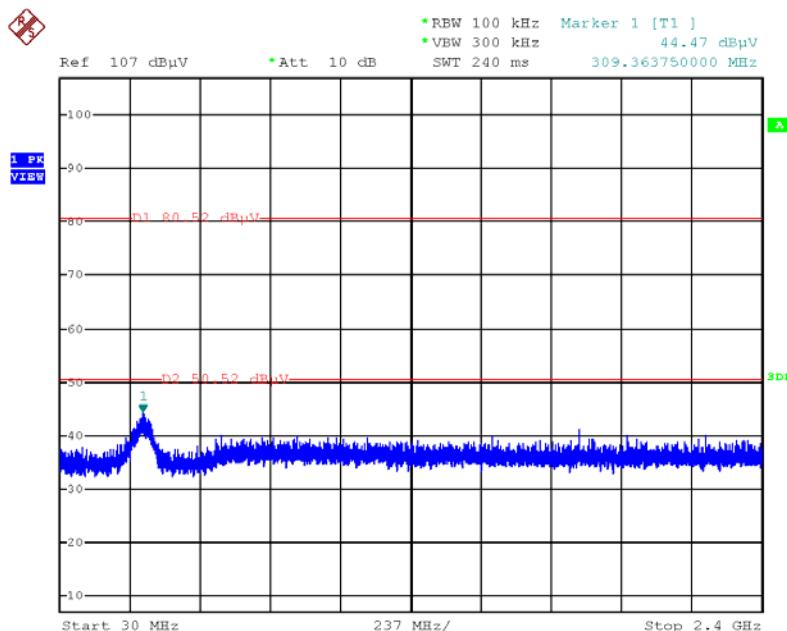
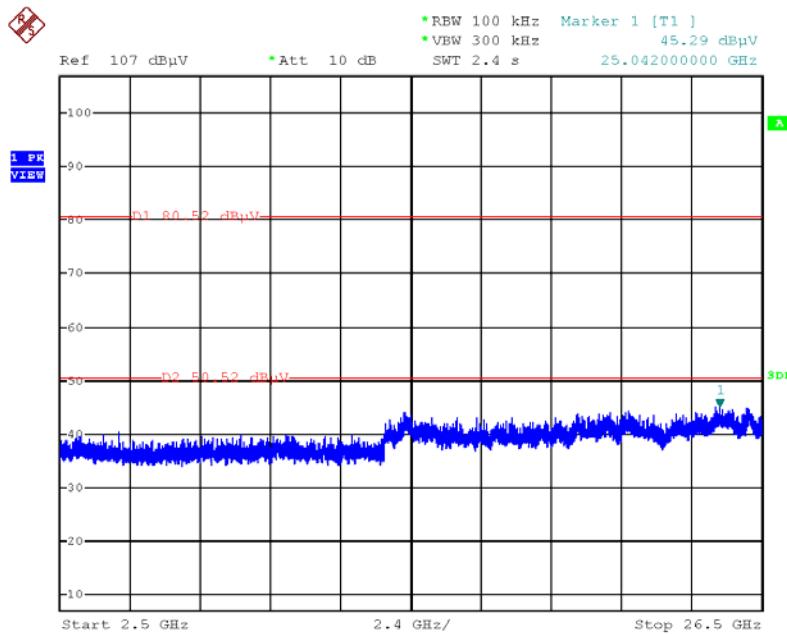
Date: 12.SEP.2013 18:05:08

**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc)**
**/ Test Mode: Mode 2**


Date: 12.SEP.2013 18:06:02


**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 2**




Date: 12.SEP.2013 18:06:40

**Plot on Configuration IEEE 802.11b / Reference Level / Test Mode: Mode 2**

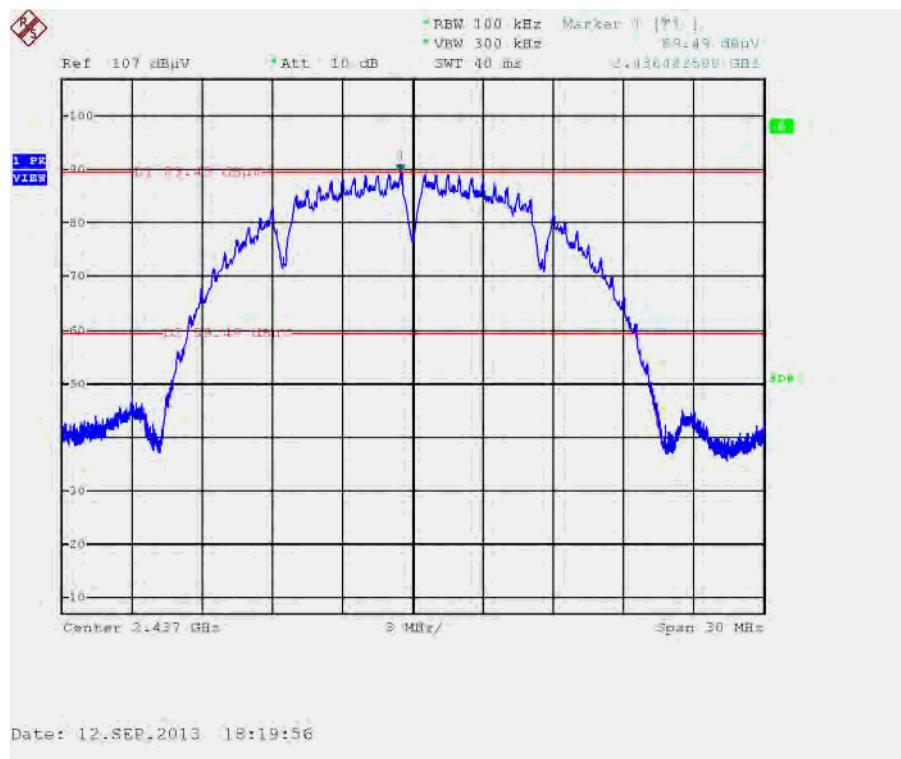


**Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 2**

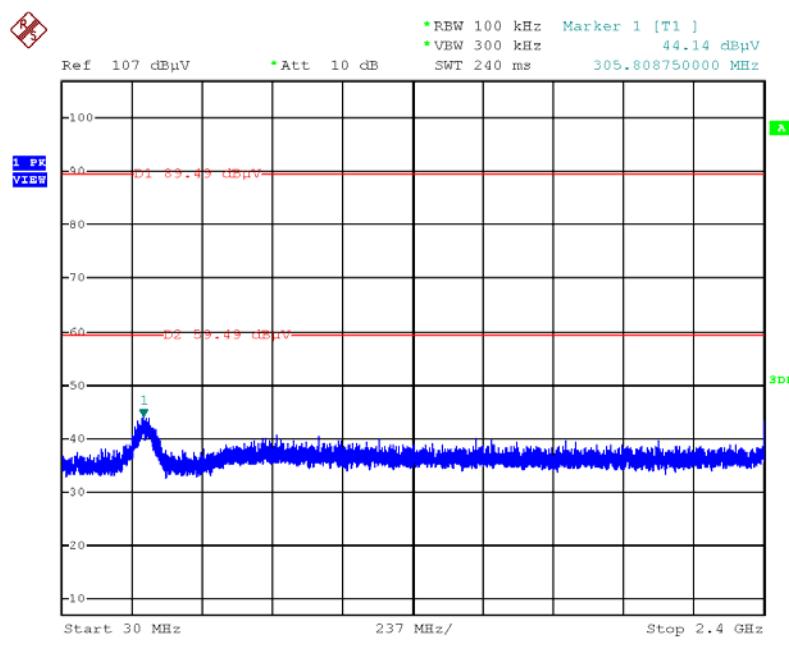


Date: 12.SEP.2013 18:20:48

**Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc) / Test Mode: Mode 2**

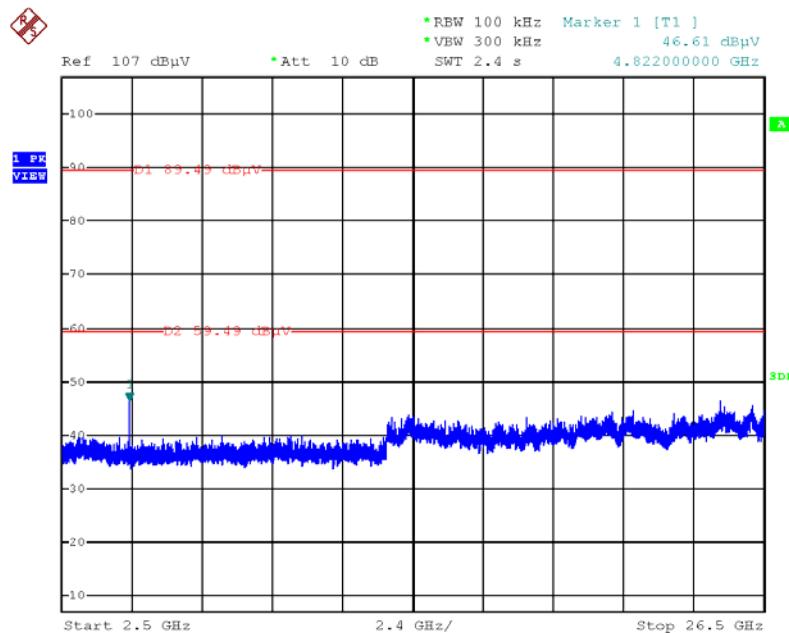

Date: 12.SEP.2013 18:21:28


**Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 2**

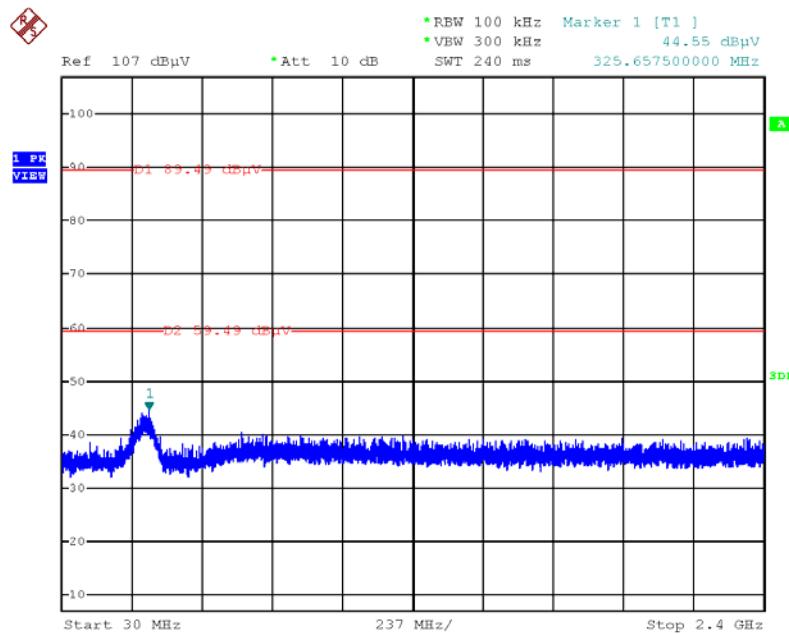

Date: 12.SEP.2013 18:22:22


**Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 2**

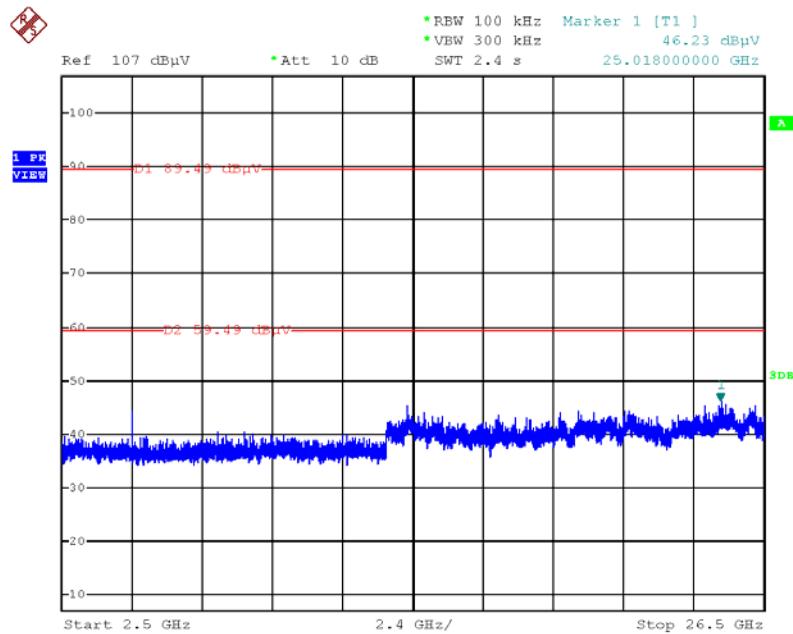


Date: 12.SEP.2013 18:23:05


**Plot on Configuration IEEE 802.11g / Reference Level / Test Mode: Mode 2**

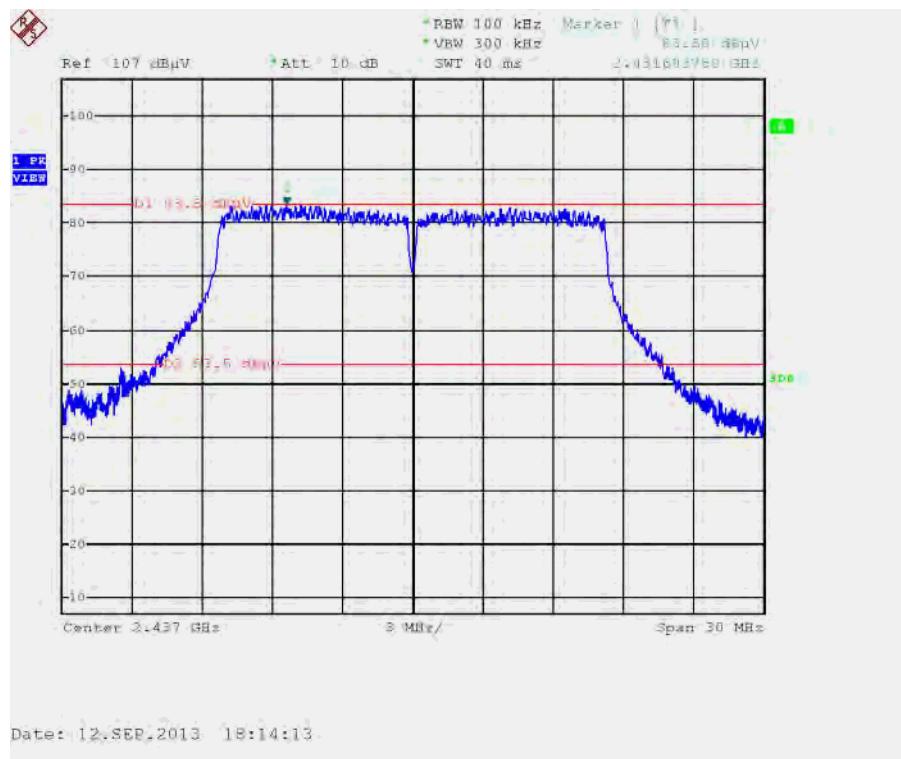

**Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 2**

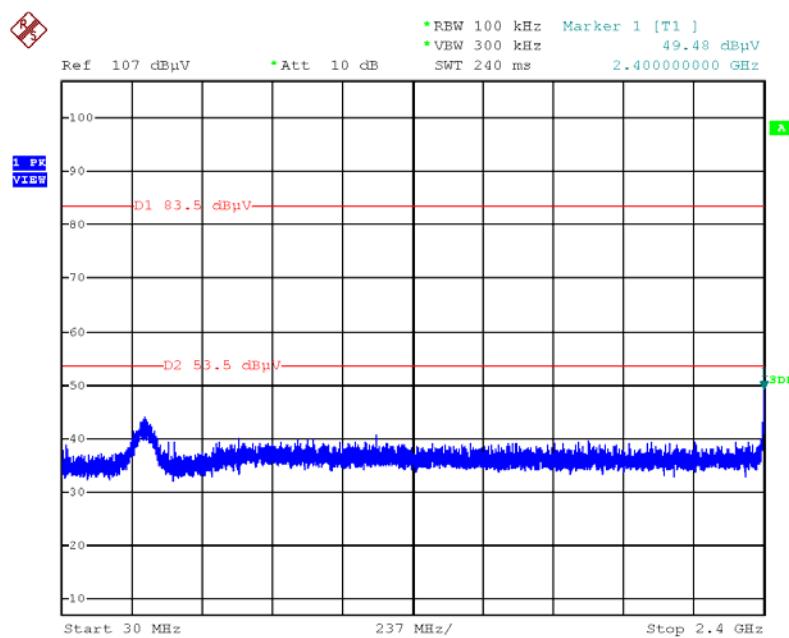


**Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc) / Test Mode: Mode 2**

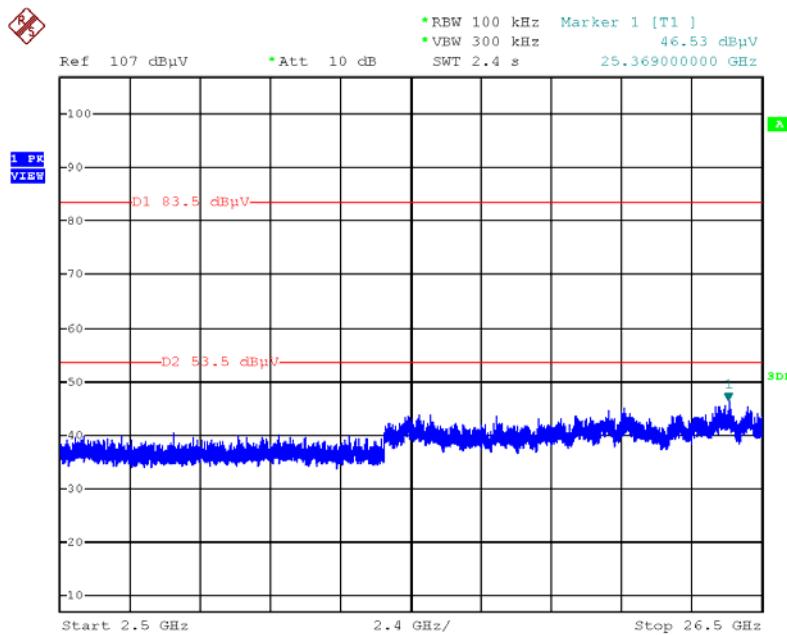

Date: 12.SEP.2013 18:15:51


**Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 2**

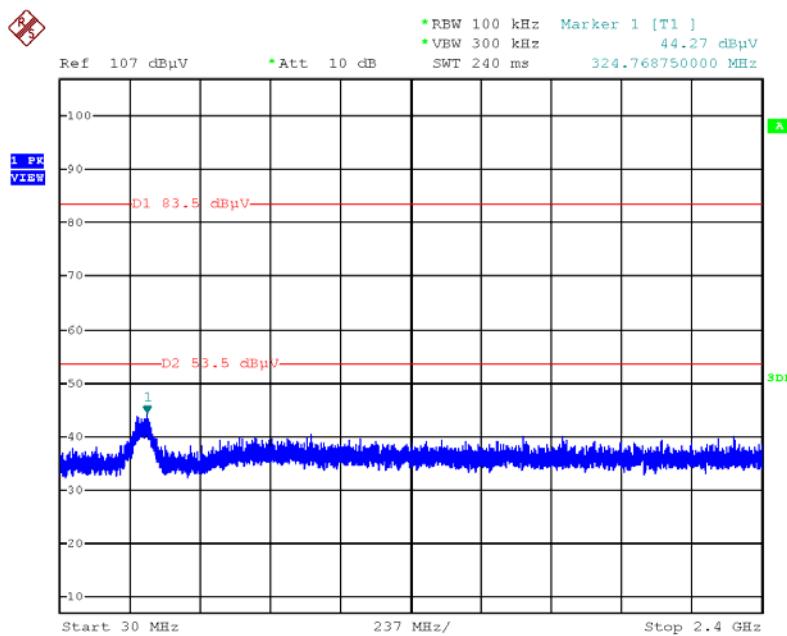

Date: 12.SEP.2013 18:16:43


**Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 2**

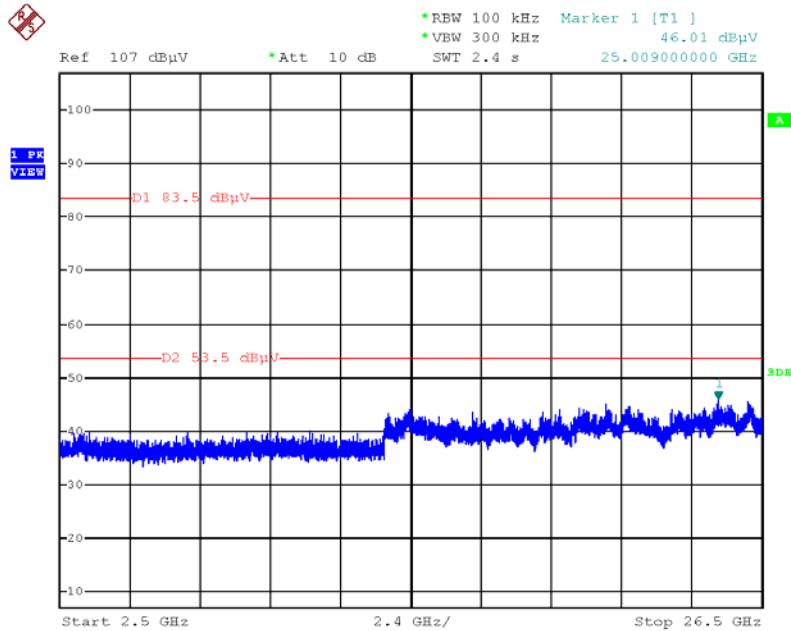


Date: 12.SEP.2013 18:17:26

## Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level / Test Mode: Mode 3

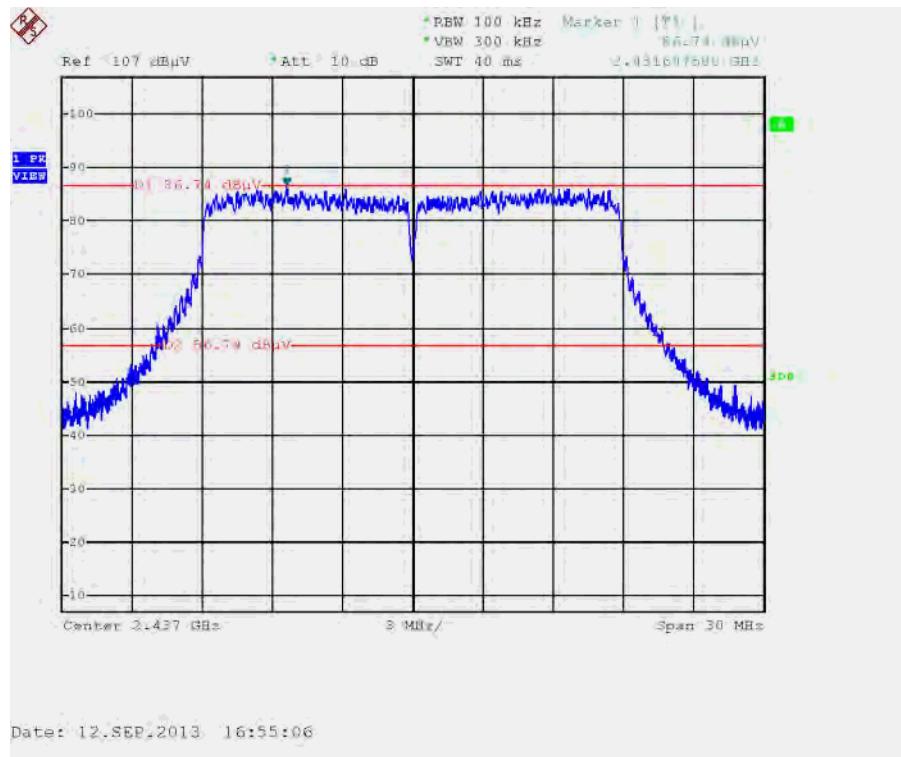


## Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc)

/ Test Mode: Mode 3

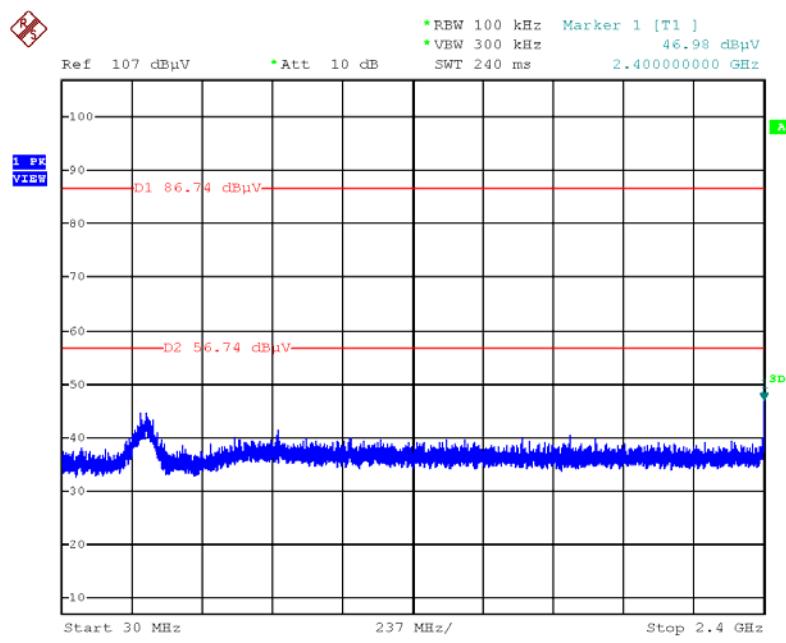

## Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)


/ Test Mode: Mode 3

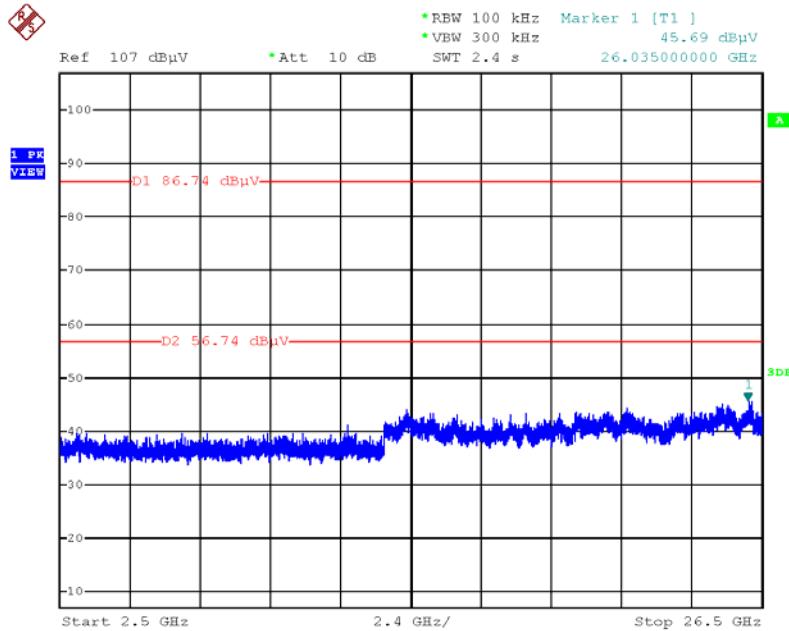

Date: 12.SEP.2013 16:56:58

## Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)


/ Test Mode: Mode 3

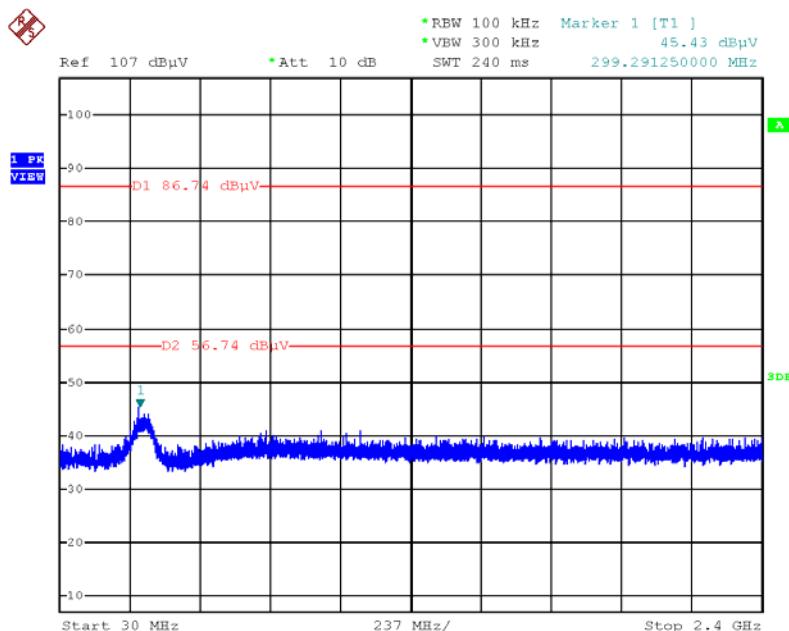



Date: 12.SEP.2013 16:58:19


**Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 3**

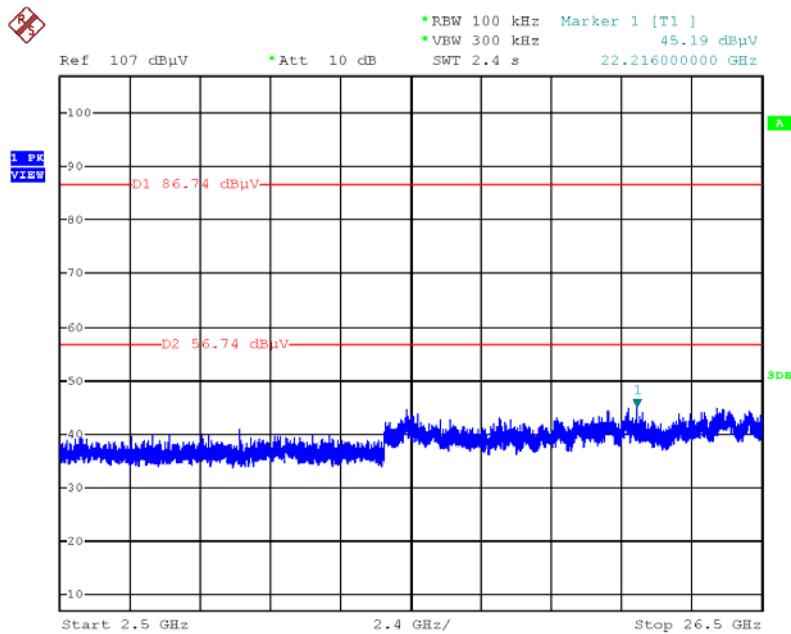


Date: 12.SEP.2013 16:58:51

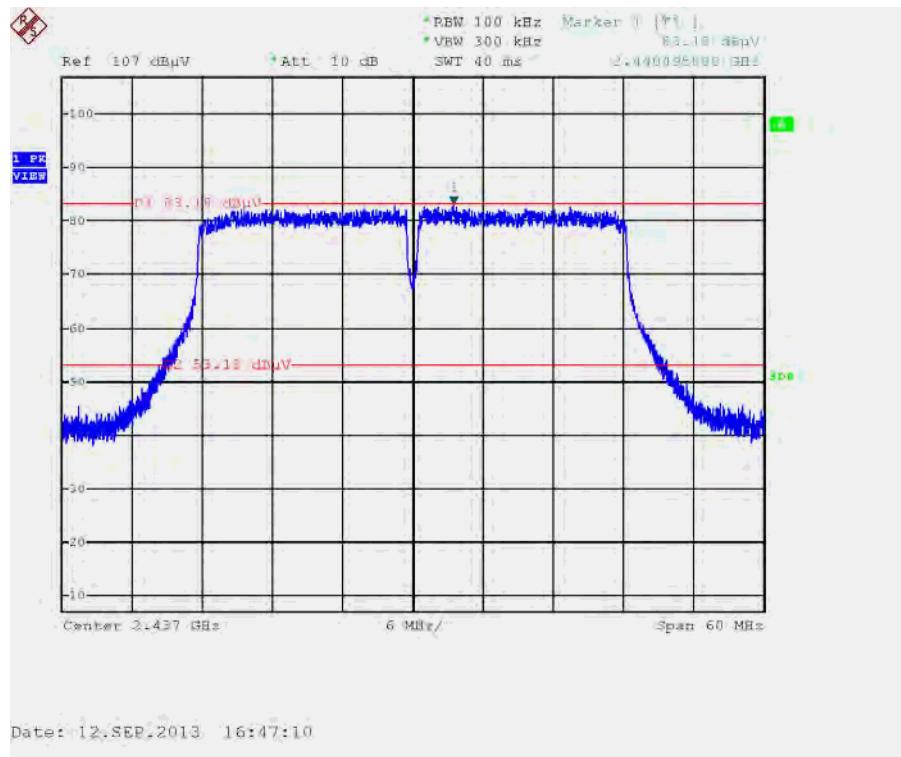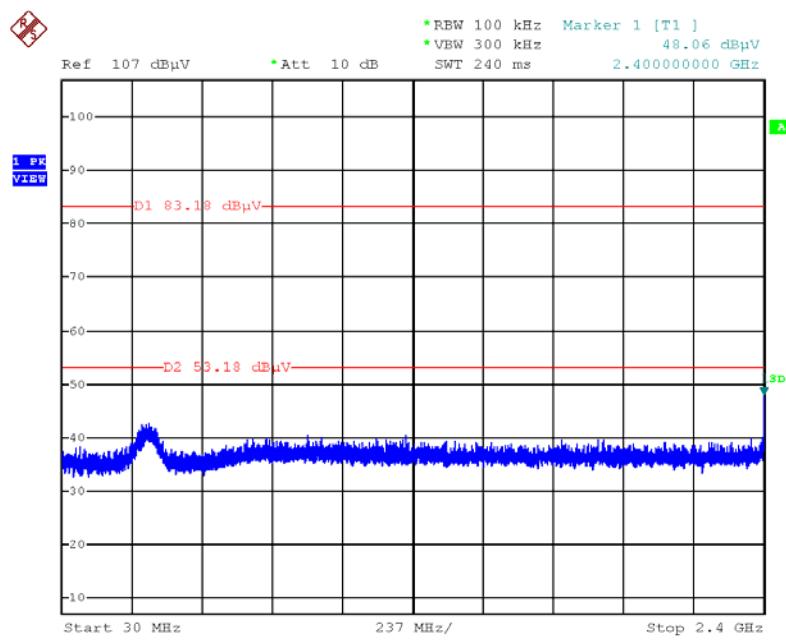**Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level / Test Mode: Mode 3**

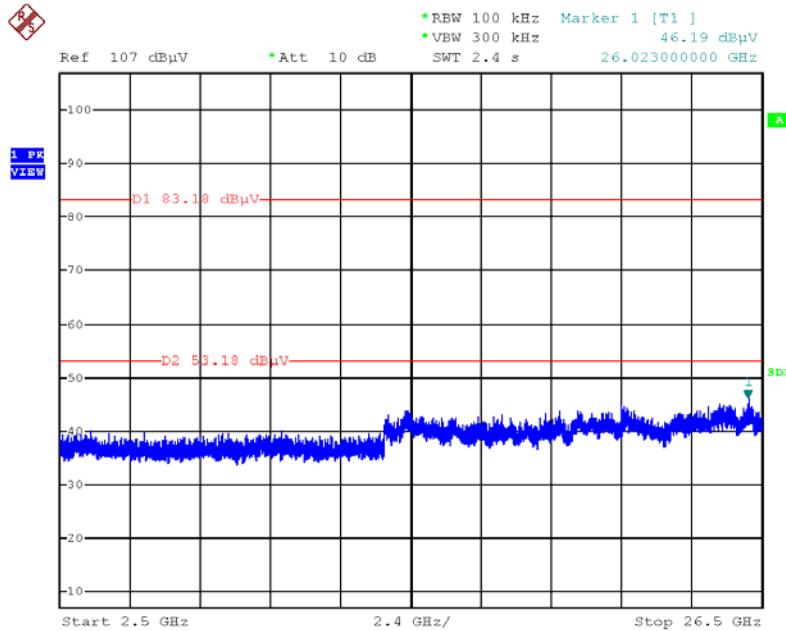**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3**


**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc)**
**/ Test Mode: Mode 3**

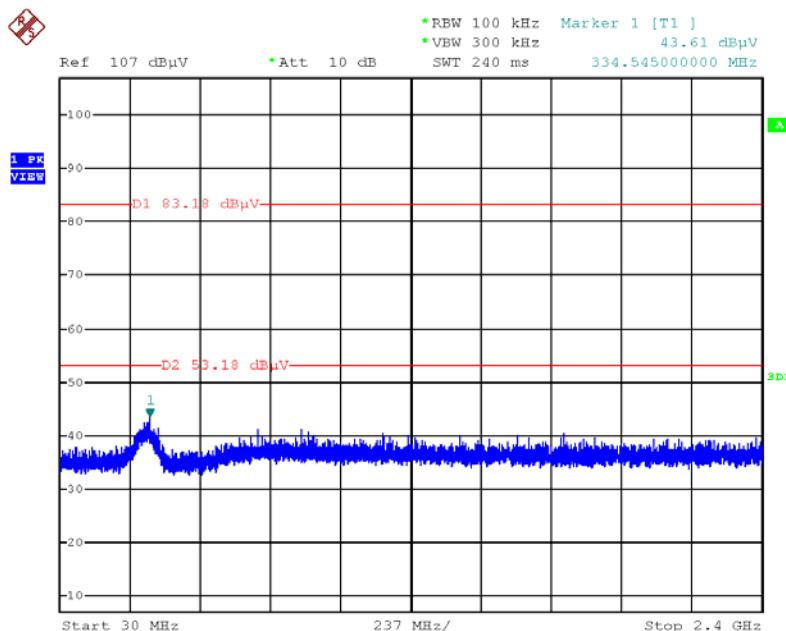
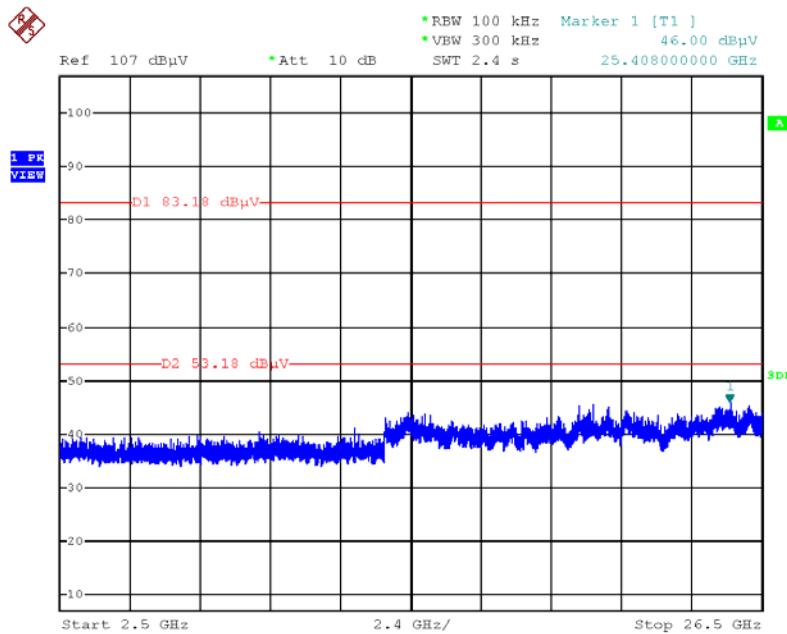
Date: 12.SEP.2013 16:49:15

**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc)**
**/ Test Mode: Mode 3**


Date: 12.SEP.2013 16:50:41


**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 3**




Date: 12.SEP.2013 16:51:22

**Plot on Configuration IEEE 802.11b / Reference Level / Test Mode: Mode 3**

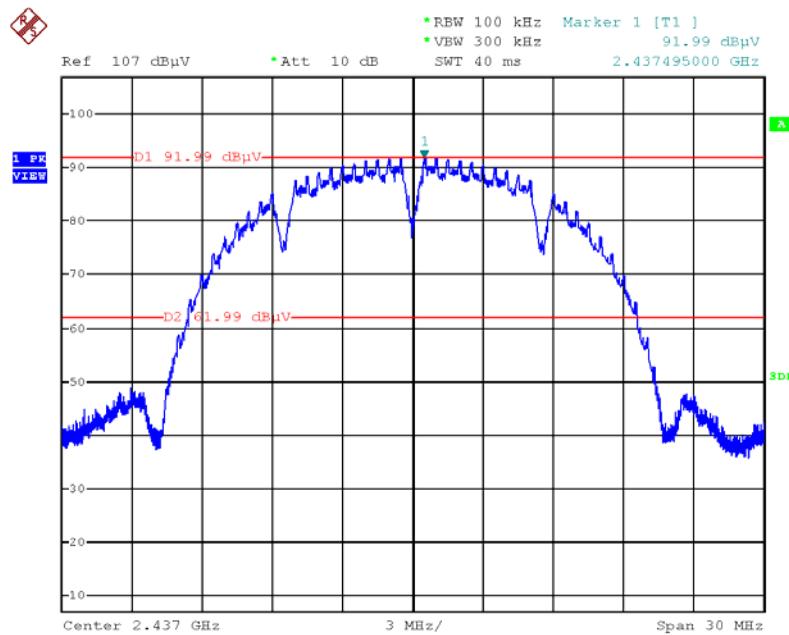


Date: 12.SEP.2013 17:05:23

**Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3**

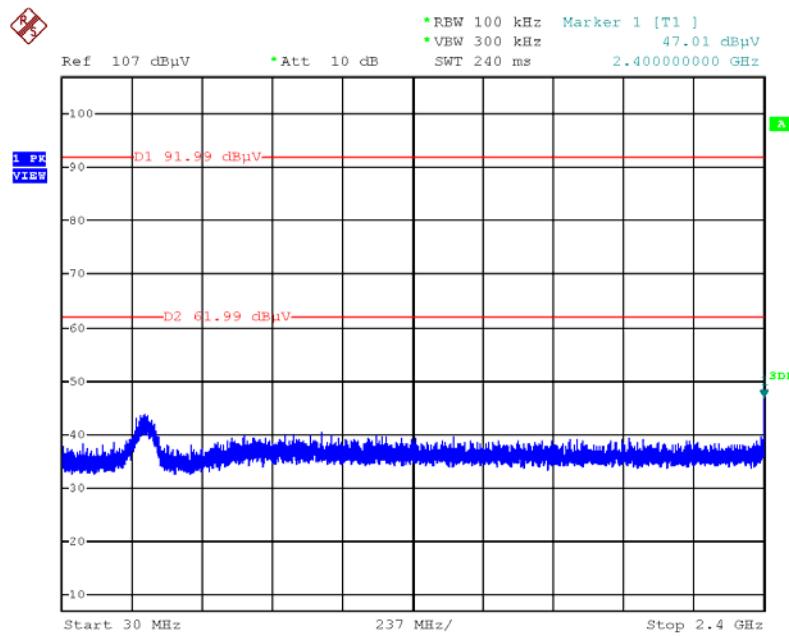


Date: 12.SEP.2013 17:06:09

**Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc) / Test Mode: Mode 3**

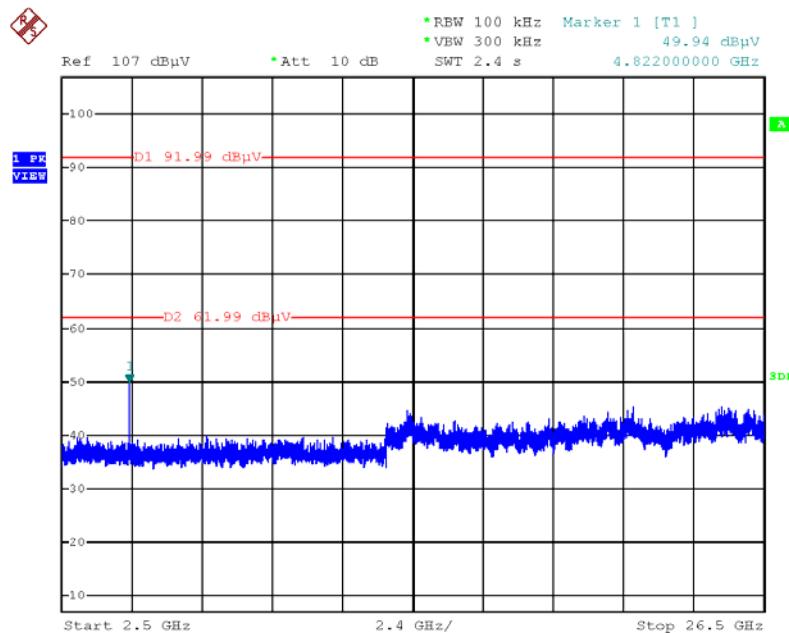

Date: 12.SEP.2013 17:06:42


**Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3**

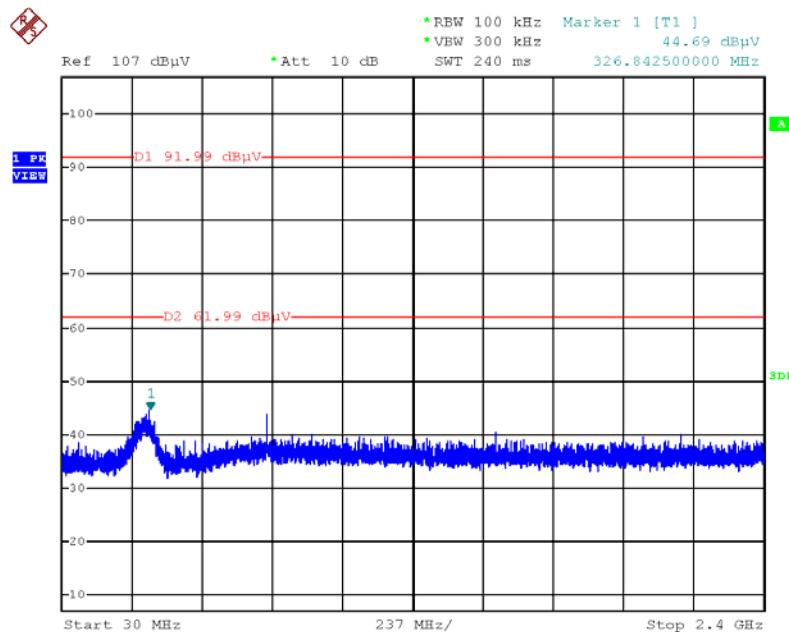

Date: 12.SEP.2013 17:07:33


**Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 3**

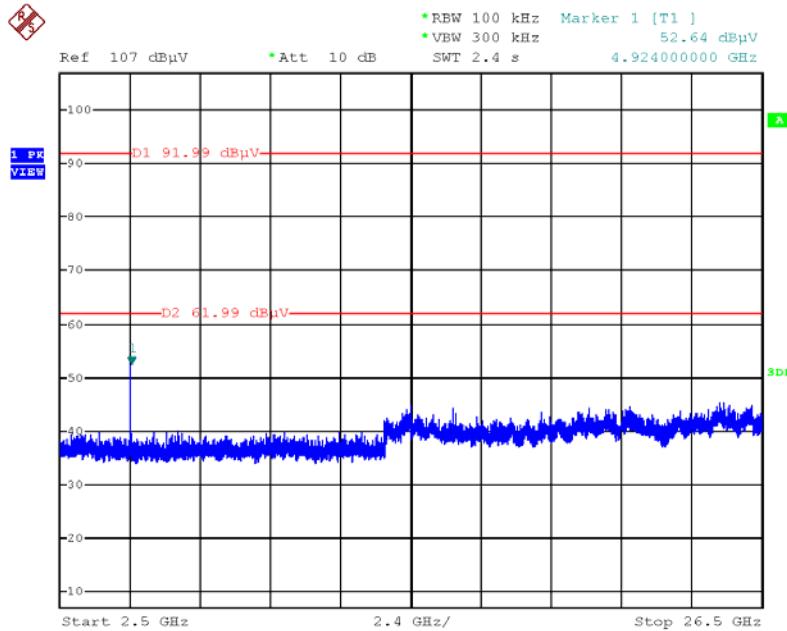


Date: 12.SEP.2013 17:08:07


**Plot on Configuration IEEE 802.11g / Reference Level / Test Mode: Mode 3**

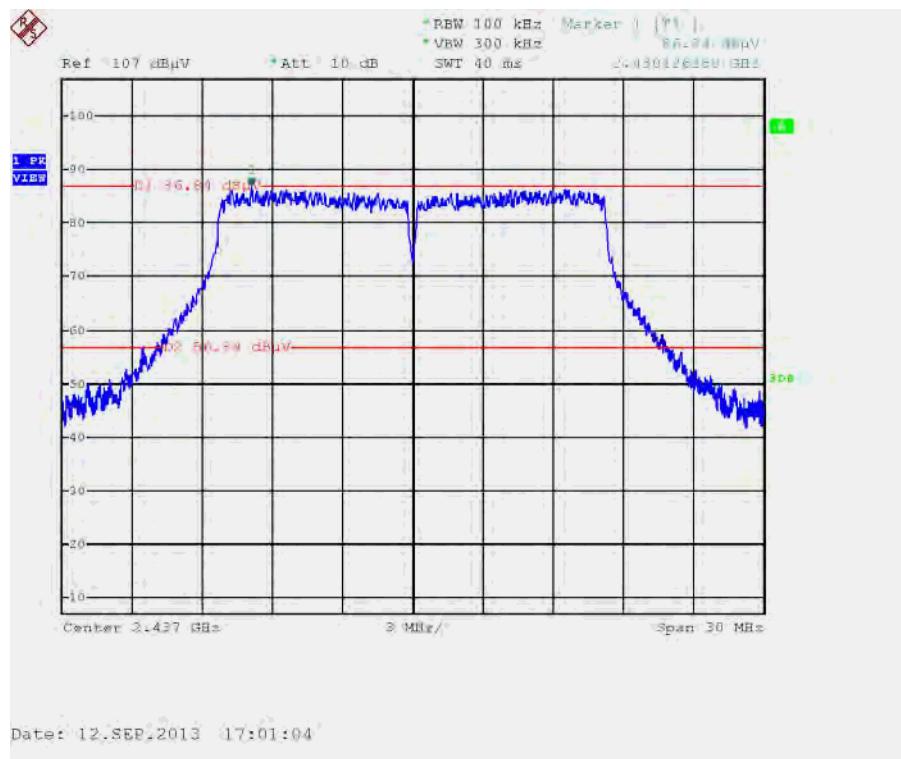

**Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3**

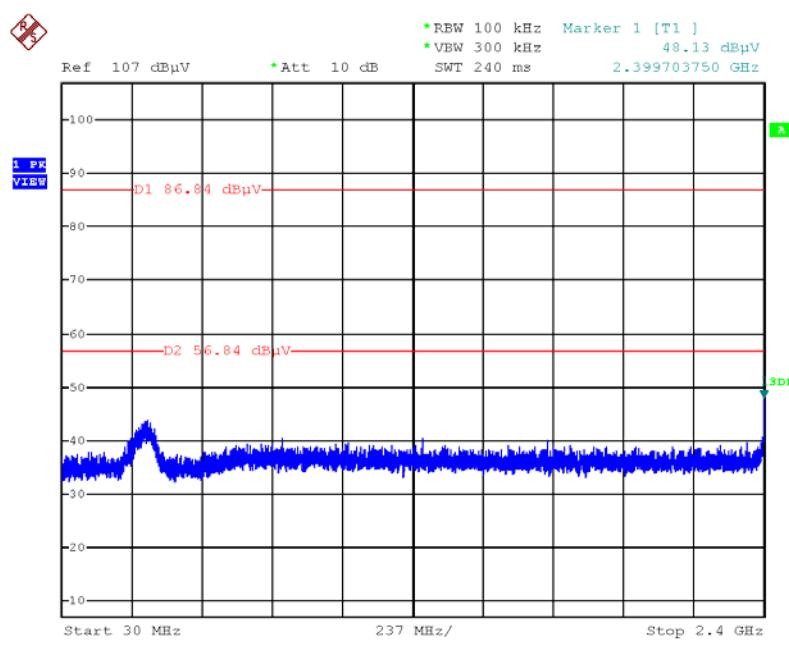


**Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc) / Test Mode: Mode 3**

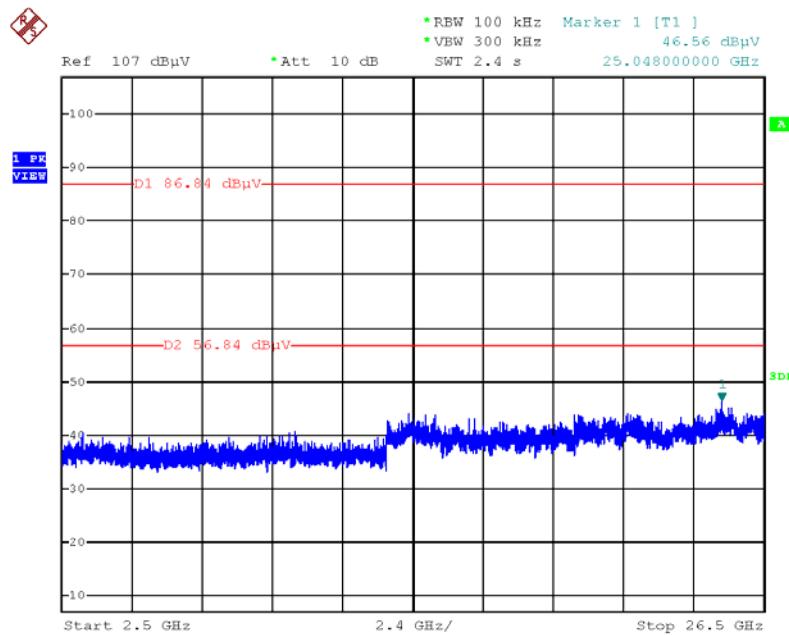

Date: 12.SEP.2013 17:02:24


**Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3**

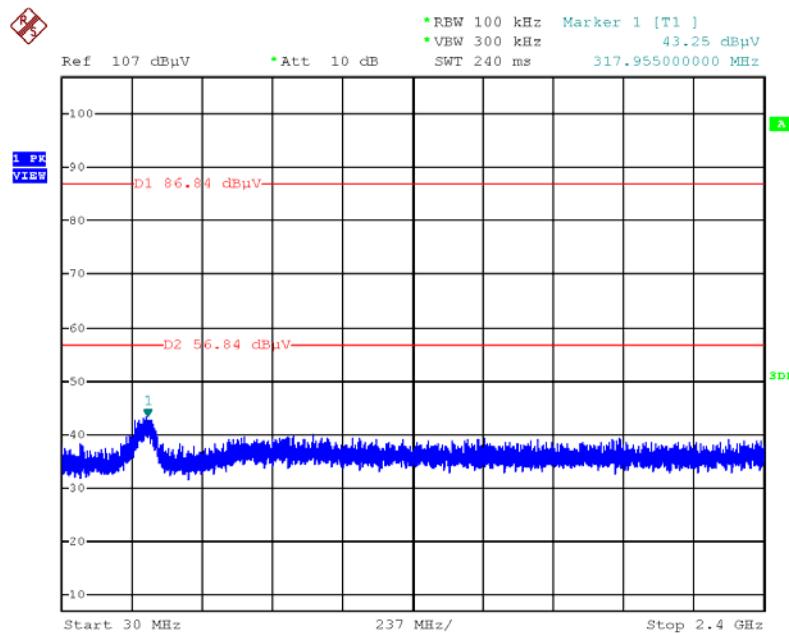



Date: 12.SEP.2013 17:03:11

**Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 3**

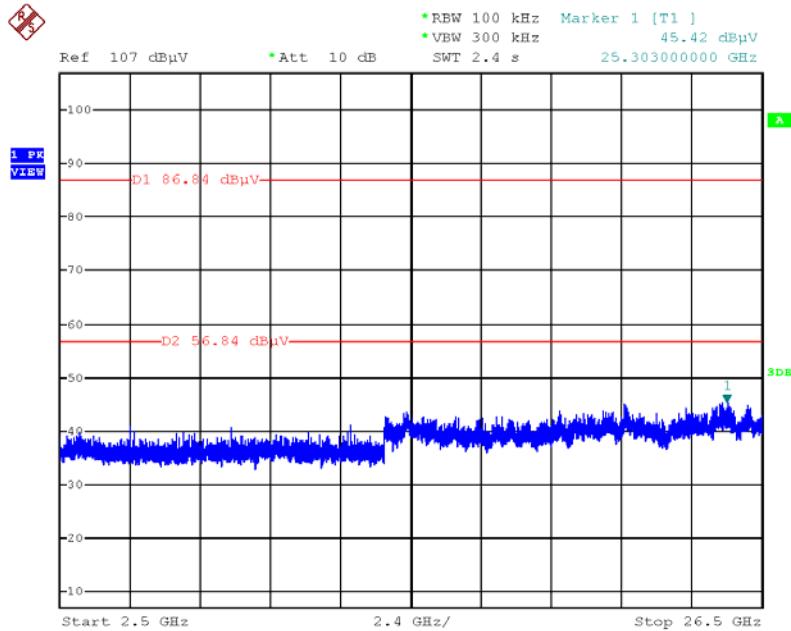


Date: 12.SEP.2013 17:03:50

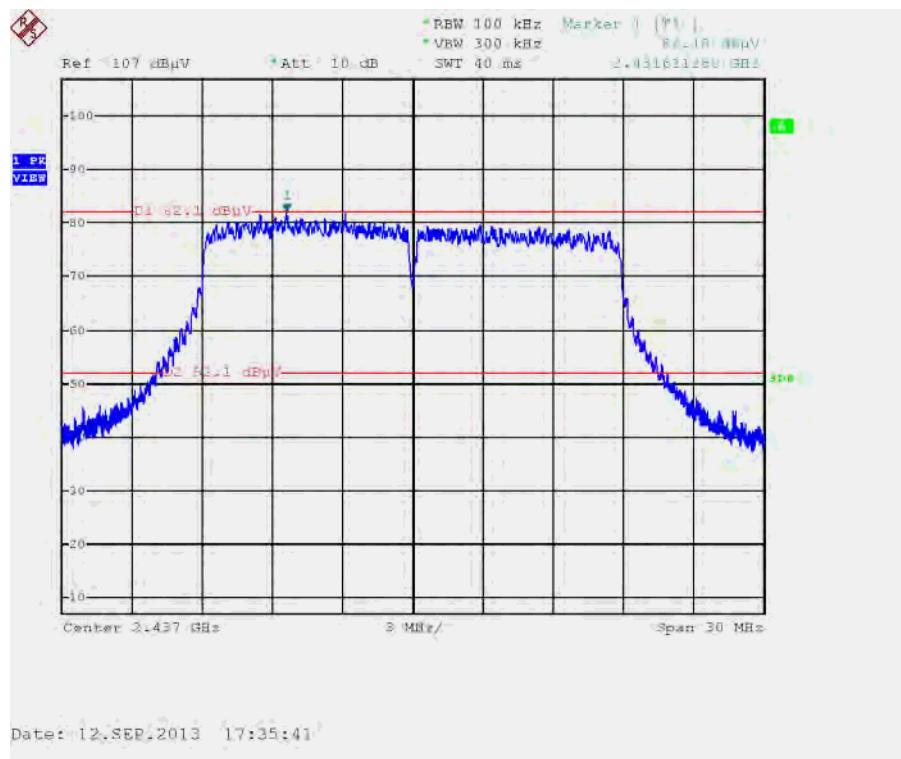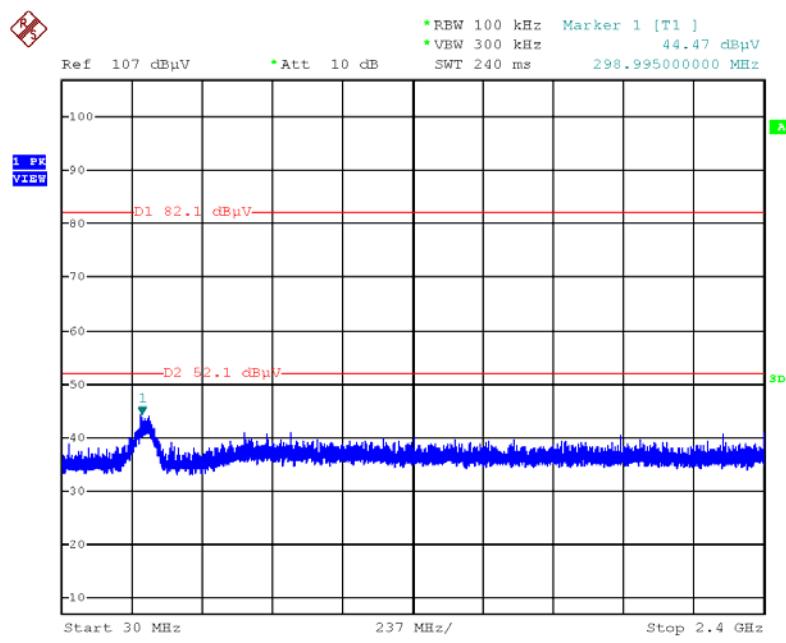**Plot on Configuration IEEE 802.11n MCS0 20MHz / Reference Level / Test Mode: Mode 4**

**Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 4**


Date: 12.SEP.2013 17:36:47

**Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 1 / 2500MHz~26500MHz (down 30dBc)**

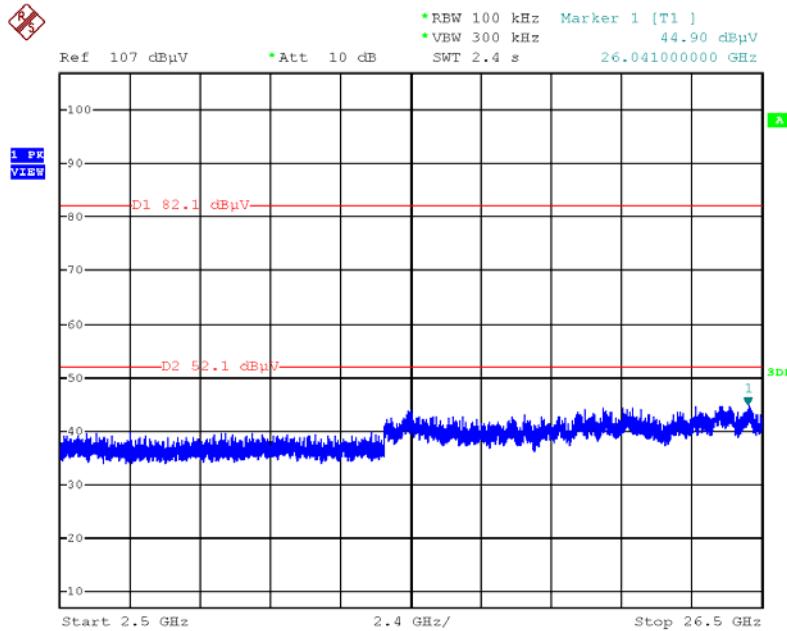
/ Test Mode: Mode 4



Date: 12.SEP.2013 17:37:35

**Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 30MHz~2400MHz (down 30dBc)**


/ Test Mode: Mode 4

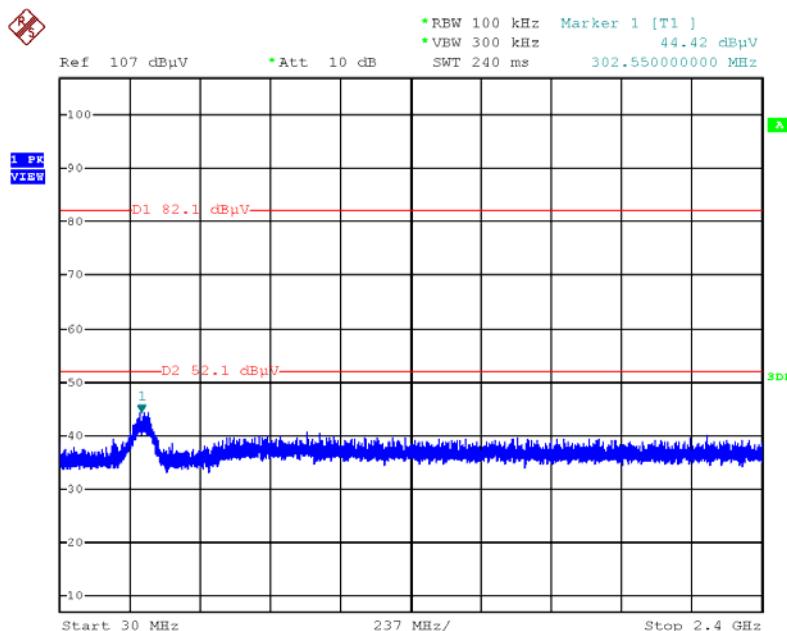



Date: 12.SEP.2013 17:38:59

**Plot on Configuration IEEE 802.11n MCS0 20MHz / CH 11 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 4**

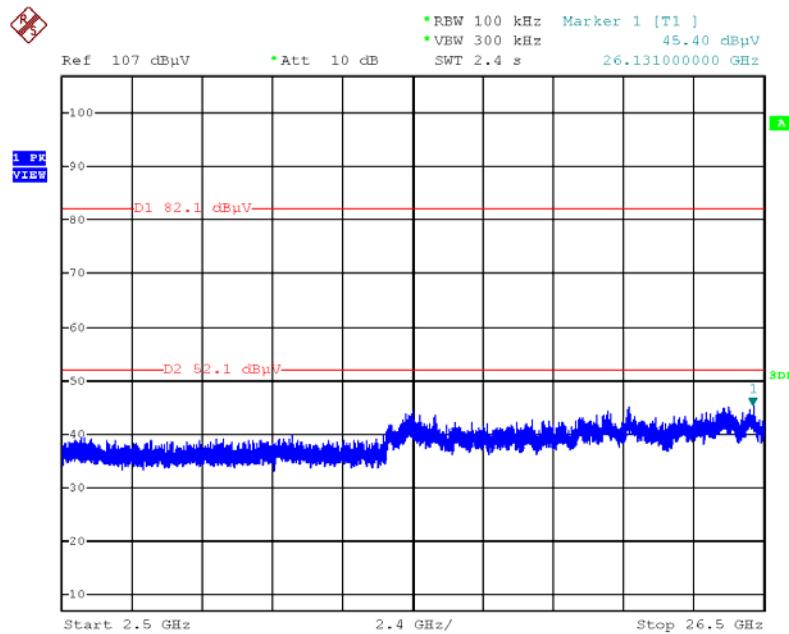


Date: 12.SEP.2013 17:39:34

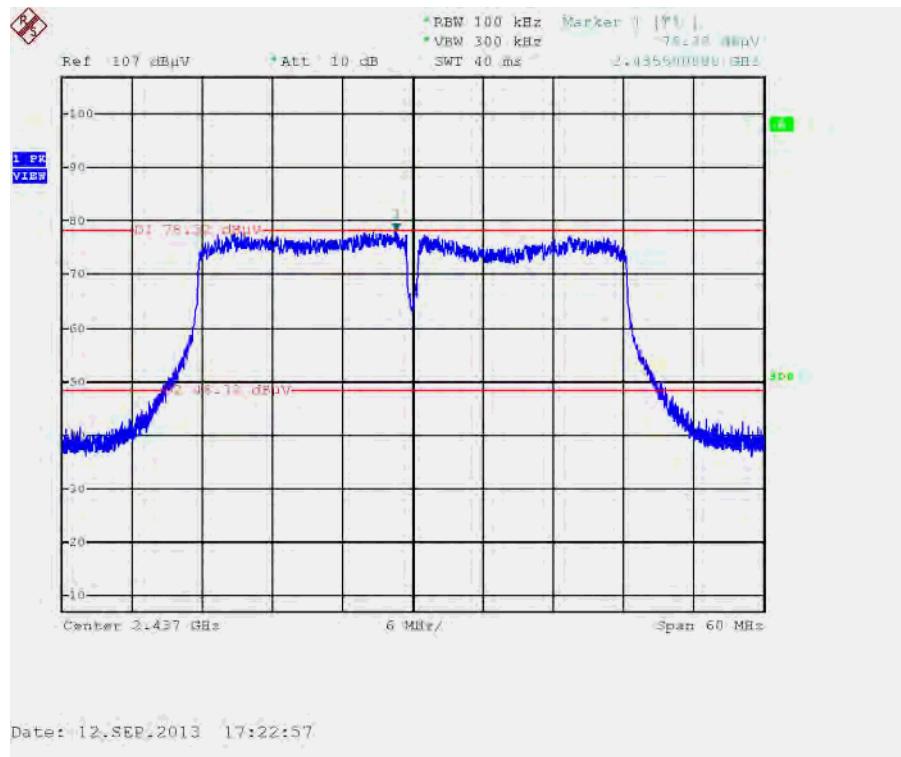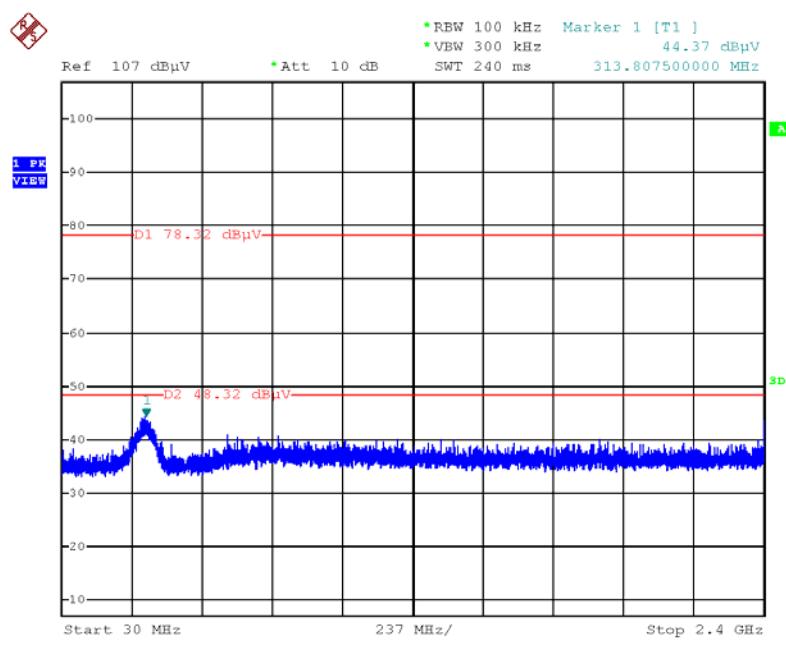**Plot on Configuration IEEE 802.11n MCS0 40MHz / Reference Level / Test Mode: Mode 4**

**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 4**


Date: 12.SEP.2013 17:27:39

**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 3 / 2500MHz~26500MHz (down 30dBc)**

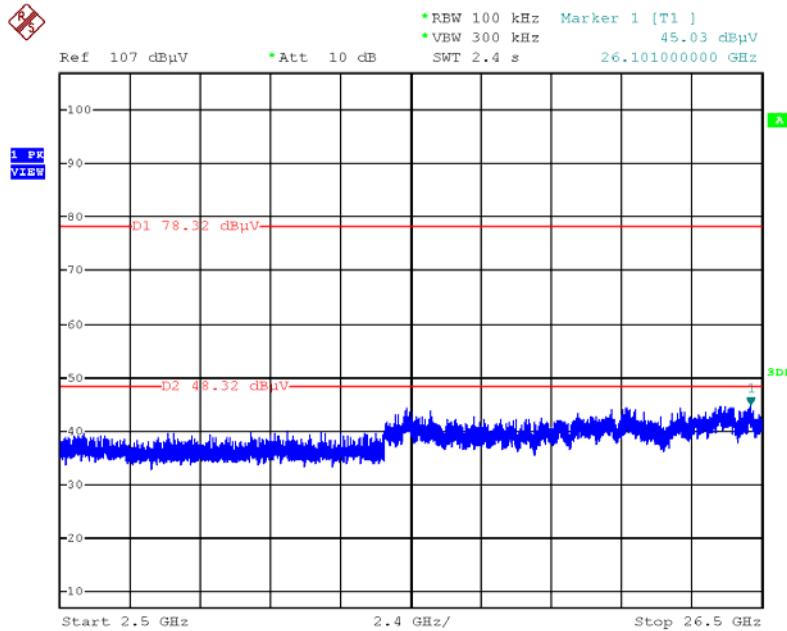
/ Test Mode: Mode 4



Date: 12.SEP.2013 17:29:24

**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 30MHz~2400MHz (down 30dBc)**


/ Test Mode: Mode 4

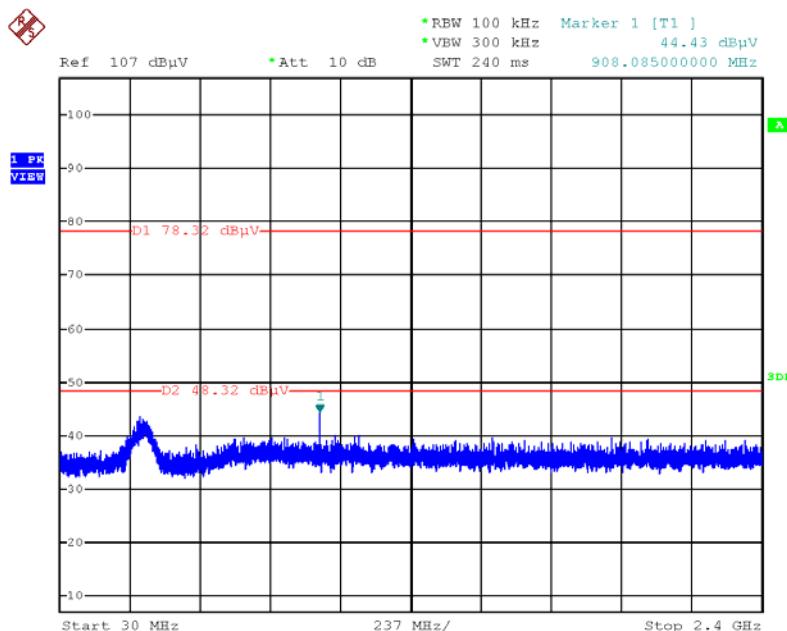

Date: 12.SEP.2013 17:30:29


**Plot on Configuration IEEE 802.11n MCS0 40MHz / CH 9 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 4**

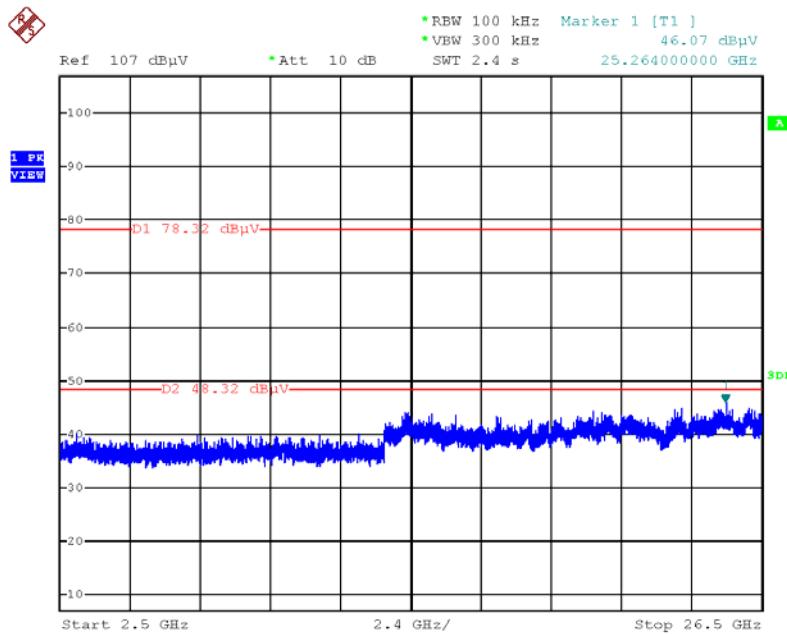


Date: 12.SEP.2013 17:31:51

**Plot on Configuration IEEE 802.11b / Reference Level / Test Mode: Mode 4**

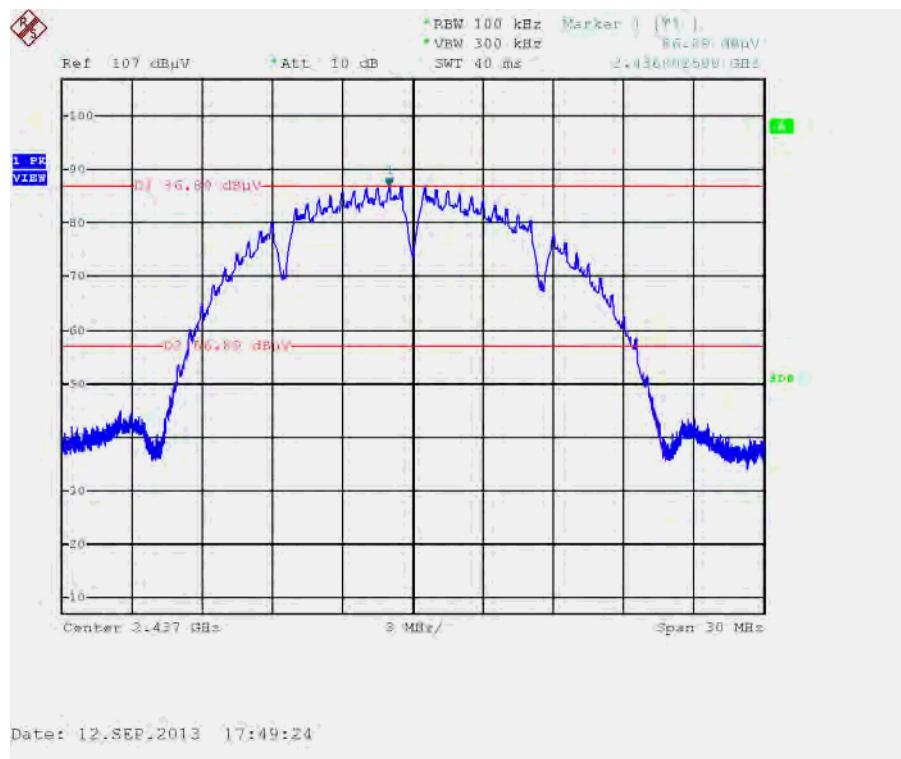


**Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 4**

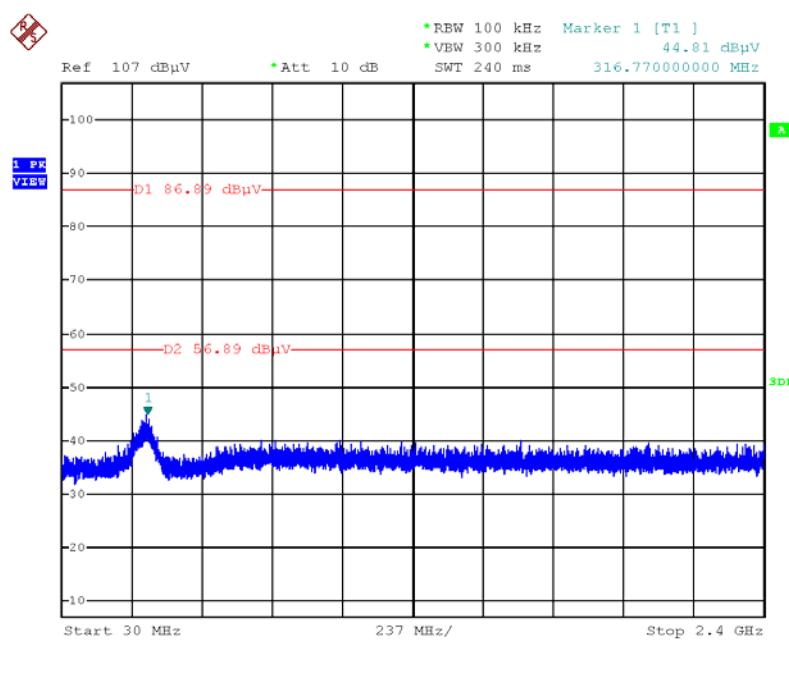


**Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)**

/ Test Mode: Mode 4

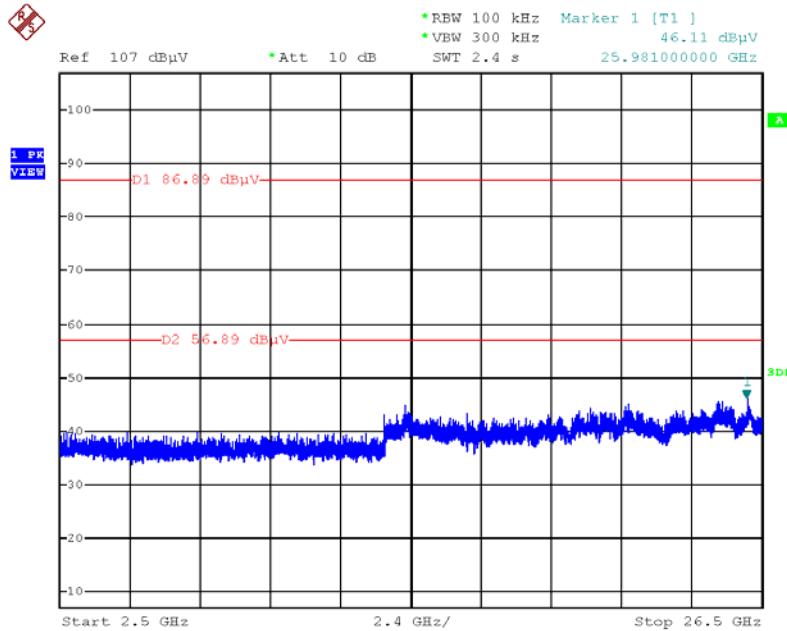

Date: 12.SEP.2013 17:51:04


**Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 4**

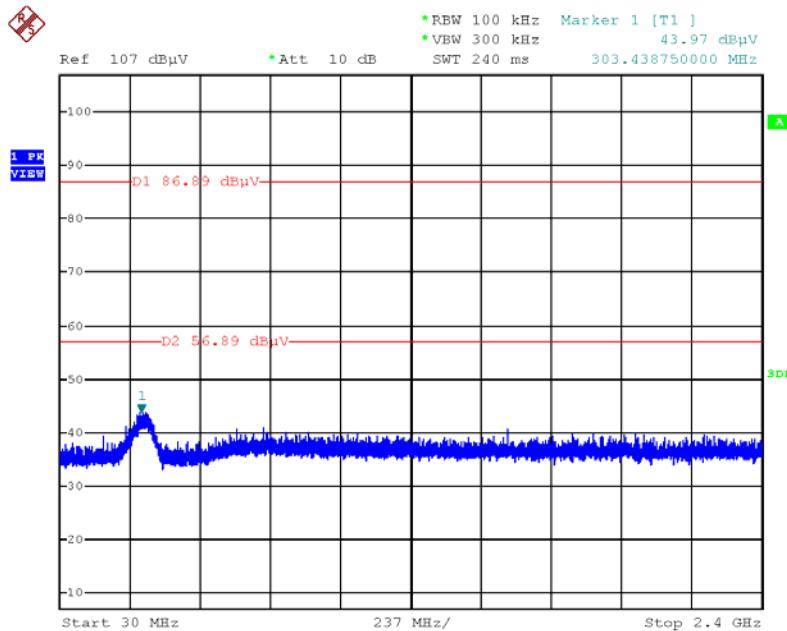

Date: 12.SEP.2013 17:52:15


**Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 4**

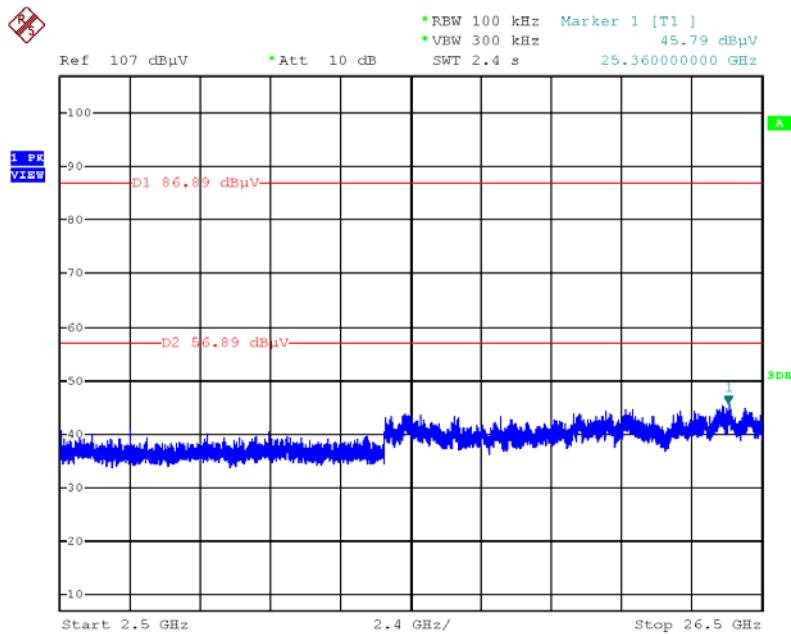


Date: 12.SEP.2013 17:52:55

**Plot on Configuration IEEE 802.11g / Reference Level / Test Mode: Mode 4**

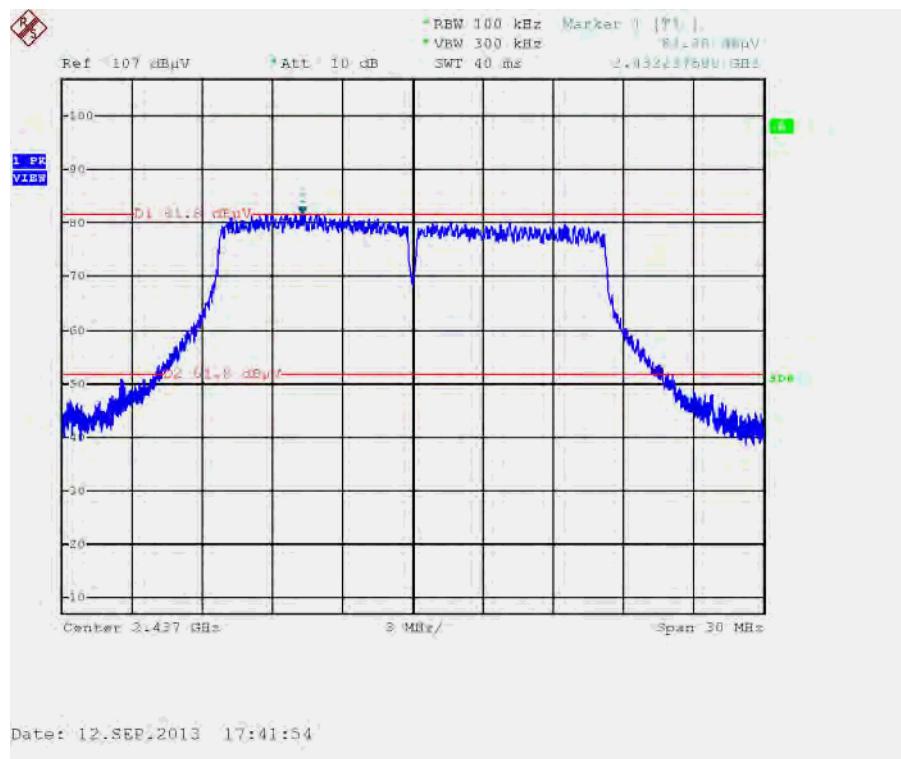


**Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 4**

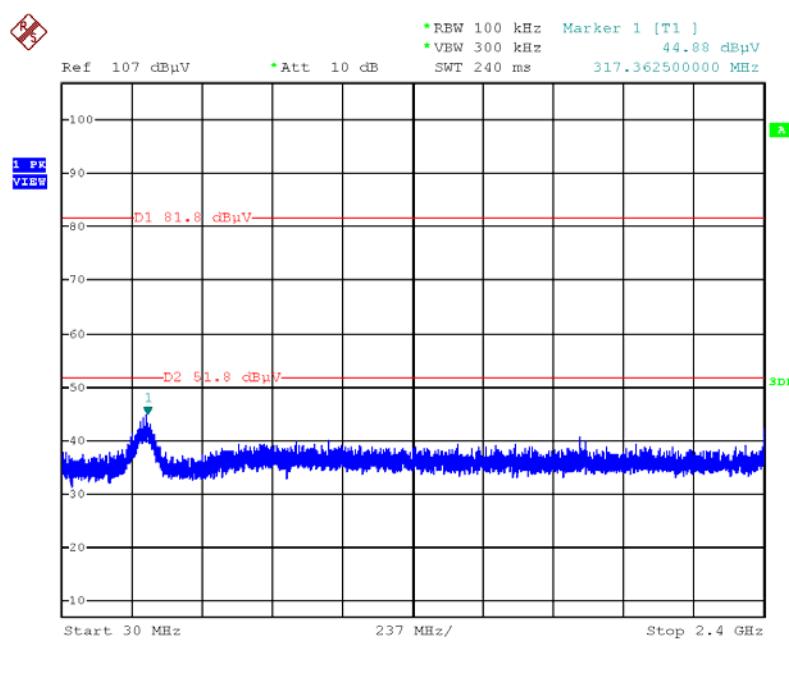


**Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)**

/ Test Mode: Mode 4

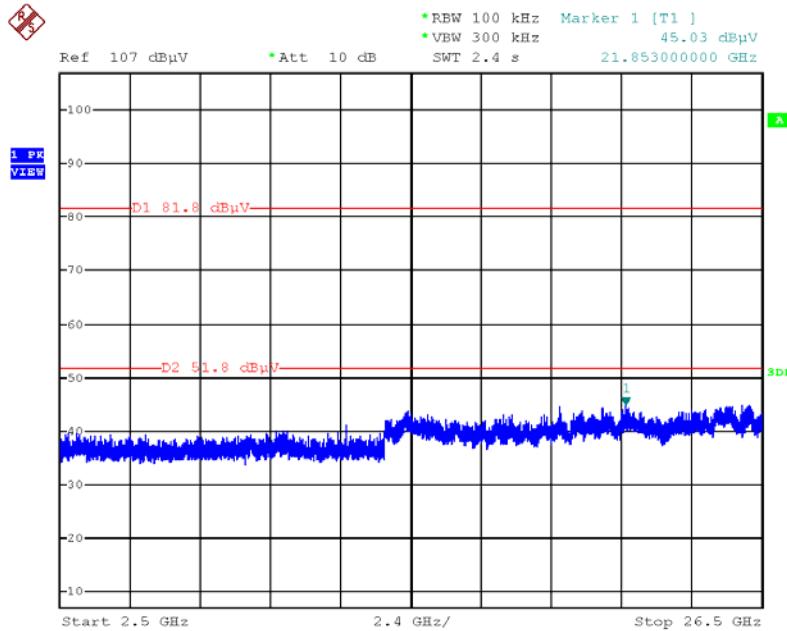

Date: 12.SEP.2013 17:43:16


**Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 4**

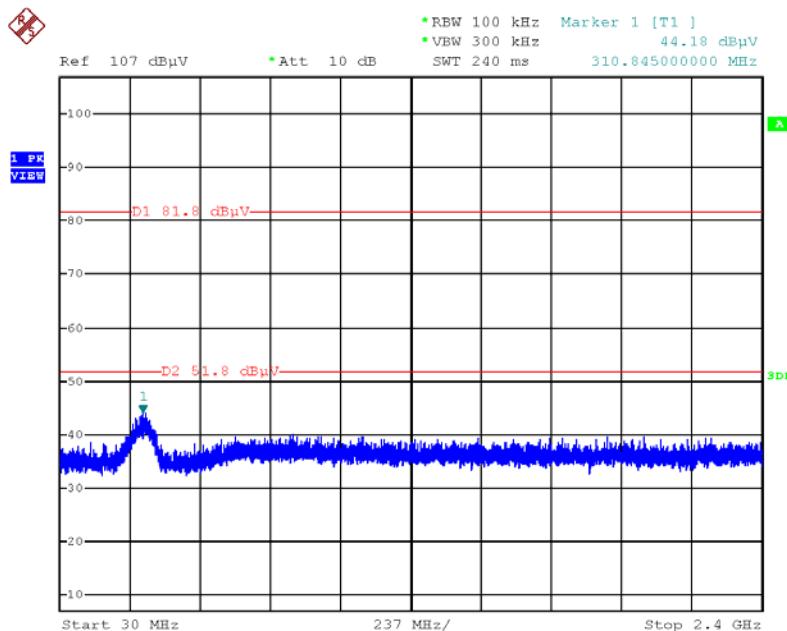

Date: 12.SEP.2013 17:44:07

**Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)**

**/ Test Mode: Mode 4**

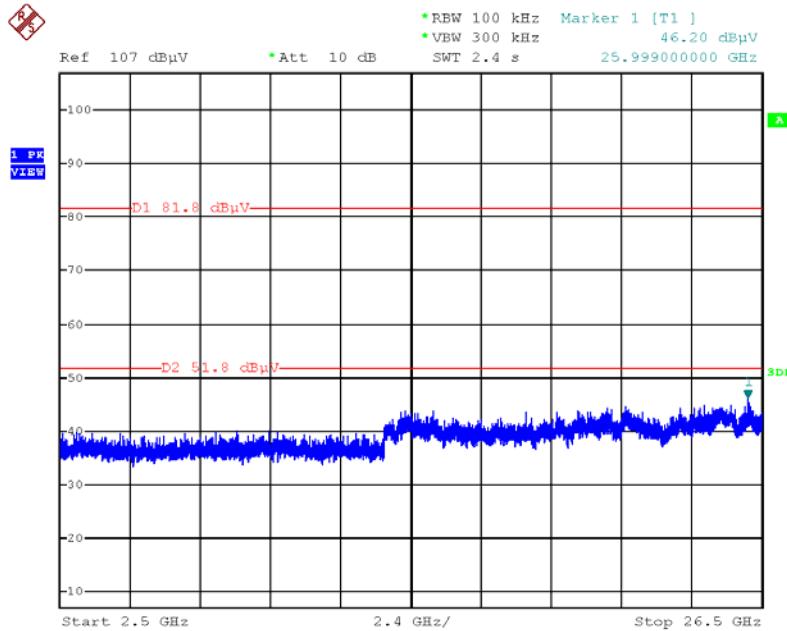

Date: 12.SEP.2013 17:44:44

## 4.5. Antenna Requirements

### 4.5.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.5.2. Antenna Connector Construction

Please refer to section 3.4 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jul. 17, 2013	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Oct. 24, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 15, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

\* Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
combined standard uncertainty $U_e(y)$	1.2			
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	2.4			

### Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	0.038	dB	normal(k=2)	0.019
Attenuator	0.047	dB	normal(k=2)	0.024
Power Meter specification	0.300	dB	normal(k=2)	0.150
Power Sensor specification	0.300	dB	normal(k=2)	0.150
Mismatch Receiver VSWR 1= Antenna VSWR 2= Pre Amplifier VSWR 3=	-0.080	dB	U-shaped	0.060
combined standard uncertainty $U_e(y)$	0.403			
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	0.806			

## Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.1727	dB	normal(k=1)	0.1727
Cable loss	0.1736	dB	normal(k=2)	0.0868
Antenna gain	0.1687	dB	normal(k=2)	0.0843
Site imperfection	0.4898	dB	Triangular	0.2
Pre-amplifier gain	0.3661	dB	normal(k=2)	0.183
Transmitter antenna	1.7	dB	rectangular	0.9815
Signal generator	0.5	dB	rectangular	0.2887
Mismatch	0.08	dB	u-shape	0.244
Spectrum analyzer	0.5	dB	rectangular	0.2887
combined standard uncertainty $U_e(y)$				1.1434
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$				2.2869

## Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.1908	dB	normal(k=1)	0.1908
Cable loss	0.1685	dB	normal(k=2)	0.0843
Antenna gain	0.1912	dB	normal(k=2)	0.0956
Site imperfection	1.3091	dB	Triangular	0.5344
Pre-amplifier gain	0.3043	dB	normal(k=2)	0.1521
Transmitter antenna	1.7	dB	rectangular	0.9815
Signal generator	0.5	dB	rectangular	0.2887
Mismatch	0.08	dB	u-shape	0.244
Spectrum analyzer	0.8	dB	rectangular	0.4619
combined standard uncertainty $U_e(y)$				1.2965
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$				2.593

## Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.1864	dB	normal(k=1)	0.1864
Cable loss	0.1666	dB	normal(k=2)	0.0833
Antenna gain	0.1904	dB	normal(k=2)	0.0952
Site imperfection	0.4882	dB	Triangular	0.1993
Pre-amplifier gain	0.2688	dB	normal(k=2)	0.1344
Transmitter antenna	1.7	dB	rectangular	0.9815
Signal generator	0.5	dB	rectangular	0.2887
Mismatch	0.08	dB	u-shape	0.244
Spectrum analyzer	0.8	dB	rectangular	0.4619
combined standard uncertainty $U_e(y)$				1.1874
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$				2.3749