FCC SAR Test Report

APPLICANT : Realtek Semiconductor Gorp.

EQUIPMENT : 802.11a/b/g/n/ac RTL8821CE

Combo module

BRAND NAME : REALTEK

MODEL NAME : RTL8821CE

FCC ID : TX2-RTL8821CE

STANDARD : FCC 47 CFR Part 2 (2.1093)

ANSI/IEEE C95.1-1992

IEEE 1528-2013

The product was installed into Notebook (Brand Name Lenovo, Model Name: TP00083A) during test.

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Manager

Cole huan'

Approved by: Jones Tsai / Manager





Report No.: FA661625-03

SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: TX2-RTL8821CE

Issued Date: May 18, 2017 Page 1 of 35

Form version.: 170509

Table of Contents

1. Statement of Compliance	
2. Administration Data	
3. Guidance Applied	
4. Equipment Under Test (EUT) Information	
4.1 General Information	
5. RF Exposure Limits	
5.1 Uncontrolled Environment	7
5.2 Controlled Environment	
6. Specific Absorption Rate (SAR)	8
6.1 Introduction	8
6.2 SAR Definition	
7. System Description and Setup	9
7.1 E-Field Probe	.10
7.2 Data Acquisition Electronics (DAE)	.10
7.3 Phantom	.11
7.4 Device Holder	
8. Measurement Procedures	
8.1 Spatial Peak SAR Evaluation	
8.2 Power Reference Measurement	
8.3 Area Scan	
8.4 Zoom Scan	
8.5 Volume Scan Procedures	
8.6 Power Drift Monitoring	
9. Test Equipment List	
10. System Verification	
10.1 Tissue Simulating Liquids	
10.2 Tissue Verification	
10.3 System Performance Check Results	
11. Conducted RF Output Power (Unit: dBm)	.20
12. Bluetooth Exclusions Applied	
13. Antenna Location	
14. SAR Test Results	_
14.1 Body SAR	
14.2 Repeated SAR Measurement	.30
15. Simultaneous Transmission Analysis	
15.1 Body Exposure Conditions	
16. Uncertainty Assessment	
17. References	.35
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

Issued Date : May 18, 2017 Form version. : 170509

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
KEI OKI NO.	VERGION	BESSKII HOR	1000ED DATE
FA661625-03	Rev. 01	Initial issue of report	May 18, 2017

Page 3 of 35

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: TX2-RTL8821CE

Issued Date: May 18, 2017 Form version.: 170509

Report No. : FA661625-03

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Realtek Semiconductor Gorp., 802.11a/b/g/n/ac RTL8821CE Combo module, RTL8821CE, are as follows.

Report No.: FA661625-03

		Highest SAR Summary	Lighaat Cimultanaaua
Equipment Class	Frequency Band	Body (Separation 0mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
		1g SAR (W/kg)	ig SAR (W/kg)
DTS	2.4GHz WLAN	0.39	
NII	5GHz WLAN	1.18	1.31
Date of Testing:		2017/04/16	~ 2017/05/10

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

2. Administration Data

Testing Laboratory		
Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	

Report No.: FA661625-03

Applicant		
Company Name	Realtek Semiconductor Gorp.	
Address	No.2,Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan	

Manufacturer		
Company Name Realtek Semiconductor Gorp.		
Address	No.2,Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan	

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02

SPORTON INTERNATIONAL INC.

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification			
Equipment Name	802.11a/b/g/n/ac RTL8821CE Combo module		
Brand Name	REALTEK		
Model Name	RTL8821CE		
FCC ID	TX2-RTL8821CE		
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.5GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz		
Mode	WLAN 2.4GHz : 802.11b/g/n/ac HT20/HT40/VHT20/VHT40 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE		

Host Information		
Equipment Name	Notebook	
Brand Name	Lenovo	
Model Name	TP00083A	
EUT Stage	Production Unit	
Remark:		

^{1.} This device has three kinds of antenna vendor; RF exposure evaluation is selected "HONGLIN Antenna" as the main test, "ICT / Speedwire Antenna" will spot check worst case found in "HONGLIN Antenna".

Antenna Information				
	Manufacturer	HONGLIN		
	Antenna Type	Main:PIFA Antenna	Aux:PIFA Antenna	
Antenna 1	Part number	DC33001FH00	DC33001FH00	
Antenna		Main Antenna :	Aux Antenna :	
	Peak gain	WLAN(2.4GHz):1.58	WLAN(2.4GHz):-0.5	
		WLAN(5GHz):-1.45	WLAN(5GHz):1.21	
	Manufacturer	ICT		
	Antenna Type	Main:PIFA Antenna	Aux:PIFA Antenna	
Antenna 2	Part number	DC33001FC00	DC33001FC00	
Amemia 2		Main Antenna :	Aux Antenna :	
	Peak gain	WLAN(2.4GHz):-0.5	WLAN(2.4GHz):-1.4	
		WLAN(5GHz):0.5	WLAN(5GHz):-1.8	
	Manufacturer	Speedwire		
	Antenna Type	Main:PIFA Antenna	Aux:PIFA Antenna	
Antenna 3	Part number	DC33001FG00	DC33001FG00	
Antenna 3	Peak gain	Main Antenna :	Aux Antenna :	
		WLAN(2.4GHz):-0.97	WLAN(2.4GHz):-0.98	
		WLAN(5GHz):-1.9	WLAN(5GHz):1.93	

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date:

FCC ID: TX2-RTL8821CE Page 6 of 35

Issued Date : May 18, 2017 Form version. : 170509

Report No.: FA661625-03

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Report No.: FA661625-03

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

FCC ID : TX2-RTL8821CE Page 7 of 35 Form version. : 170509

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

Report No.: FA661625-03

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (p). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

FCC ID : TX2-RTL8821CE Page 8 of 35 Form version. : 170509

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:



Report No.: FA661625-03

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps.
- The phantom, the device holder and other accessories according to the targeted measurement.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: May 18, 2017 Form version.: 170509

FCC ID: TX2-RTL8821CE Page 9 of 35

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core	
	Interleaved sensors	
	Built-in shielding against static charges	
	PEEK enclosure material (resistant to organic	
	solvents, e.g., DGBE)	- 2.3
Frequency	10 MHz – 4 GHz;	
	Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis)	
	±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μW/g – >100 mW/g;	
_	Linearity: ±0.2 dB	- 4
Dimensions	Overall length: 337 mm (tip: 20 mm)	60
	Tip diameter: 3.9 mm (body: 12 mm)	
	Distance from probe tip to dipole centers: 3.0 mm	



Report No.: FA661625-03

<EX3DV4 Probe>

Construction	Symmetric design with triangular core
	Built-in shielding against static charges
	PEEK enclosure material (resistant to organic
	solvents, e.g., DGBE)
Frequency	10 MHz – >6 GHz
	Linearity: ±0.2 dB (30 MHz – 6 GHz)
Directivity	±0.3 dB in TSL (rotation around probe axis)
	±0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g – >100 mW/g
	Linearity: ±0.2 dB (noise: typically <1 µW/g)
Dimensions	Overall length: 337 mm (tip: 20 mm)
	Tip diameter: 2.5 mm (body: 12 mm)
	Typical distance from probe tip to dipole centers: 1
	mm



7.2 <u>Data Acquisition Electronics (DAE)</u>

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

Page 10 of 35



Fig 5.1 Photo of DAE

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: TX2-RTL8821CE

Issued Date: May 18, 2017

Form version. : 170509

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	/
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	7 5
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

Report No.: FA661625-03

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

SPORTON INTERNATIONAL INC.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.





Report No.: FA661625-03

Mounting Device for Hand-Held Transmitters

Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID : TX2-RTL8821CE Page 12 of 35 Form version. : 170509

Issued Date : May 18, 2017

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Report No.: FA661625-03

- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

 SPORTON INTERNATIONAL INC.

 TEL: 886-3-327-3456 / FAX: 886-3-328-4978
 Issued Date: May 18, 2017

FCC ID : TX2-RTL8821CE Page 13 of 35 Form version. : 170509

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz		
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$		
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°		
	\leq 2 GHz: \leq 15 mm 2 – 3 GHz: \leq 12 mm	$3 - 4 \text{ GHz:} \le 12 \text{ mm}$ $4 - 6 \text{ GHz:} \le 10 \text{ mm}$		
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.			

Page 14 of 35

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: TX2-RTL8821CE

Issued Date: May 18, 2017 Form version.: 170509

Report No.: FA661625-03

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Report No.: FA661625-03

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}			\leq 2 GHz: \leq 8 mm 2 – 3 GHz: \leq 5 mm [*]	$3 - 4 \text{ GHz: } \le 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \le 4 \text{ mm}^*$
	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	$3 - 4 \text{ GHz: } \le 4 \text{ mm}$ $4 - 5 \text{ GHz: } \le 3 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	gradedgrid	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4 \text{ GHz: } \le 3 \text{ mm}$ $4 - 5 \text{ GHz: } \le 2.5 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$
surface		Δz _{Zoom} (n>1): between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: May 18, 2017

FCC ID : TX2-RTL8821CE Page 15 of 35 Form version. : 170509

When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

9. Test Equipment List

Manufacturer	Name of Emilianes	Towns/Mandal	Serial Number	Calibration		
Manufacturer	Name of Equipment	Name of Equipment Type/Model Se		Last Cal.	Due Date	
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 30, 2016	Aug. 29, 2017	
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2016	Sep. 26, 2017	
SPEAG	Data Acquisition Electronics	DAE4	1424	Feb. 16, 2017	Feb. 15, 2018	
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Feb. 21, 2017	Feb. 20, 2018	
WonDer	Thermometer	WD-5015	TM685	Oct. 12, 2016	Oct. 11, 2017	
SPEAG	Device Holder	N/A	N/A	N/A	N/A	
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 09, 2016	Dec. 08, 2017	
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 04, 2017	Jan. 03, 2018	
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 19, 2016	Jul. 18, 2017	
LINE SEIKI	Digital Thermometer	LKMelectronic	DTM3000SPEZIAL	Sep. 05, 2016	Sep. 04, 2017	
Anritsu	Power Meter	ML2495A	1438002	Dec. 06, 2016	Dec. 05, 2017	
Anritsu	Power Sensor	MA2411B	1339195	Dec. 06, 2016	Dec. 05, 2017	
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 21, 2016	Jun. 20, 2017	
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 09, 2017	Mar. 08, 2018	
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 09, 2017	Mar. 08, 2018	
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1		
Woken	Attenuator 1	WK0602-XX	N/A	Note 1		
PE	Attenuator 2	PE7005-10	N/A	No	te 1	
PE	Attenuator 3	PE7005- 3	N/A	No	te 1	

Report No.: FA661625-03

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

Page 17 of 35







Report No.: FA661625-03

Fig 10.2 Photo of Liquid Height for Body SAR

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: TX2-RTL8821CE

Issued Date: May 18, 2017 Form version: 170509



10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target

tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)		
For Head For Head										
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9		
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5		
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5		
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0		
2450	55.0	0	0	0	0	45.0	1.80	39.2		
2600	54.8	0	0	0.1	0	45.1	1.96	39.0		
				For Body						
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5		
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2		
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0		
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3		
2450	68.6	0	0	0	0	31.4	1.95	52.7		
2600	68.1	0	0	0.1	0	31.8	2.16	52.5		

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)		
Water	64~78%		
Mineral oil	11~18%		
Emulsifiers	9~15%		
Additives and Salt	2~3%		

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
2450	MSL	22.4	1.980	54.022	1.95	52.70	1.54	2.51	±5	2017/4/16
2450	MSL	22.4	1.966	52.975	1.95	52.70	0.82	0.52	±5	2017/5/9
5250	MSL	22.5	5.535	47.005	5.36	48.95	3.26	-3.97	±5	2017/5/10
5600	MSL	22.5	5.988	46.372	5.77	48.50	3.78	-4.39	±5	2017/5/10
5750	MSL	22.5	6.199	46.138	5.94	48.28	4.36	-4.44	±5	2017/5/10

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: TX2-RTL8821CE

Page 18 of 35


Issued Date: May 18, 2017 Form version. : 170509

Report No.: FA661625-03

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2017/4/16	2450	MSL	250	D2450V2-736	EX3DV4 - SN3976	DAE4 Sn1424	12.00	52.10	48.00	-7.87
2017/5/9	2450	MSL	250	D2450V2-736	EX3DV4 - SN3976	DAE4 Sn1424	12.50	52.10	50.00	-4.03
2017/5/10	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	7.28	75.50	72.80	-3.58
2017/5/10	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	8.27	78.60	82.70	5.22
2017/5/10	5750	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE4 Sn1424	7.31	74.60	73.10	-2.01

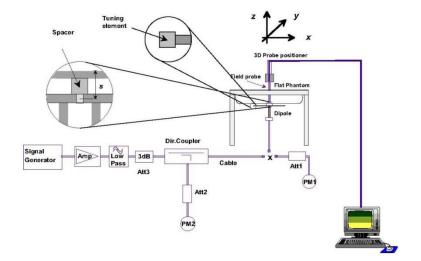



Report No.: FA661625-03

Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

Issued Date: May 18, 2017 FCC ID: TX2-RTL8821CE Form version.: 170509 Page 19 of 35

11. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.

Report No.: FA661625-03

- 2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
- 3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
- 4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

 SPORTON INTERNATIONAL INC.

 TEL: 886-3-327-3456 / FAX: 886-3-328-4978
 Issued Date: May 18, 2017

FCC ID : TX2-RTL8821CE Page 20 of 35 Form version. : 170509

<2.4GHz WLAN Main ANT>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		1	2412	16.08	16.50	
	802.11b 1Mbps	6	2437	17.60	18.00	100.00
		11	2462	16.90	17.00	
		1	2412	16.01	16.50	
	802.11g 6Mbps	6	2437	18.63	19.00	100.00
		11	2462	15.92	16.00	
	802.11n-HT20 MCS0	1	2412	14.55	15.00	100.00
2.4GHz WLAN		6	2437	18.00	18.00	
		11	2462	14.88	15.00	
	802.11n-HT40 MCS0	3	2422	13.60	14.00	
		6	2437	15.55	16.00	100.00
		9	2452	14.18	14.50	
		1	2412	14.50	15.00	
	802.11ac-VHT20 MCS0	6	2437	17.98	18.00	100.00
-		11	2462	14.87	15.00	
		3	2422	13.58	14.00	
	802.11ac-VHT40 MCS0	6	2437	15.53	16.00	100.00
		9	2452	14.15	14.50	

Report No.: FA661625-03

<2.4GHz WLAN Aux ANT>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		1	2412	16.06	16.50	
	802.11b 1Mbps	6	2437	17.58	18.00	100.00
		11	2462	16.87	17.00	
		1	2412	16.00	16.50	
	802.11g 6Mbps	6	2437	18.58	19.00	100.00
		11	2462	15.90	16.00	
		1	2412	14.52	15.00	
2.4GHz WLAN	802.11n-HT20 MCS0	6	2437	17.91	18.00	100.00
		11	2462	14.84	15.00	
	802.11n-HT40 MCS0	3	2422	13.59	14.00	
		6	2437	15.50	16.00	100.00
		9	2452	14.12	14.50	
		1	2412	14.42	15.00	
	802.11ac-VHT20 MCS0	6	2437	17.87	18.00	100.00
-		11	2462	14.79	15.00	
		3	2422	13.50	14.00	
	802.11ac-VHT40 MCS0	6	2437	15.46	16.00	100.00
		9	2452	14.07	14.50	

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

Issued Date: May 18, 2017 Form version. : 170509 FCC ID: TX2-RTL8821CE Page 21 of 35

<5GHz WLAN Main ANT>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %				
		36	5180	16.75	17.00					
	802.11a 6Mbps	40	5200	17.83	18.00	100.00				
	002.11a bivibps	44	5220	17.85	18.00	100.00				
		48	5240	16.95	17.00					
	802.11n-HT20 MCS0	36	5180	16.50	17.00					
		40	5200	17.92	18.00	100.00				
5.2GHz WLAN		44	5220	18.00	18.00	100.00				
5.2GHZ WLAN		48	5240	17.98	18.00					
	802.11n-HT40 MCS0	38	5190	12.50	100.00					
	602.1111-H140 MC30	46	5230	16.95	17.00	100.00				
		36	5180	16.49	17.00					
	802.11ac-VHT20 MCS0	40	5200	17.91	18.00	100.00				
	602.11ac-VH120 MC50	44	5220	17.97	18.00	100.00				
		48	5240	17.94	18.00					
	802.11ac-VHT40 MCS0	38	5190	12.10	12.50	100.00				
	002.11ac-vn140 WC30	46	5230	16.92	17.00	100.00				
	802.11ac-VHT80 MCS0	42	5210	10.85	11.00	100.00				

Report No. : FA661625-03

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %			
		52	5260	17.98	18.50				
	000 44 - 0Mb	56	5280	17.80	18.50	100.00			
	802.11a 6Mbps	60	5300	17.85	18.50	100.00			
		64	5320	18.15	18.50				
	802.11n-HT20 MCS0	52	5260	18.03	18.50				
		56	5280	18.00	18.50	100.00			
5.3GHz WLAN		60	5300	18.09	18.50	100.00			
5.3GHZ WLAIN		64	5320	18.07	18.50				
	802.11n-HT40 MCS0	54	5270	17.85	100.00				
	002.1111-H140 MC30	62	5310	13.10	13.50	100.00			
		52	5260	18.00	18.50				
	802.11ac-VHT20 MCS0	56	5280	17.99	18.50	100.00			
	002.11ac-VH120 WC30	60	5300	18.05	18.50	100.00			
		64	5320	18.02	18.50				
	802.11ac-VHT40 MCS0	54	5270	17.80	18.50	100.00			
	002.11ac-V1140 WC30	62	5310	13.07	13.50	100.00			
	802.11ac-VHT80 MCS0	58	5290	12.50	13.00	100.00			

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

Issued Date: May 18, 2017 Form version. : 170509 FCC ID: TX2-RTL8821CE Page 22 of 35

F	CC	SAR	Test	Re	port
---	----	-----	------	----	------

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %				
		100	5500	16.15	17.00					
		116	5580	18.15	18.50					
	802.11a 6Mbps	124	5620	18.00	18.50	100.00				
		132	5660	17.85	18.50	100.00				
		140	5700	17.00	17.50					
		144	5720	16.96	17.50					
		100	5500	16.51	17.00					
		116	5580	18.15	18.50					
	000 44 - LITOO MCCO	124	5620	17.99	18.50	400.00				
	802.11n-HT20 MCS0	132	5660	18.00	18.50	100.00				
		140	5700	15.95	16.00					
		144	5720	15.81	16.00					
		102	5510	11.80	12.00					
5 501 I- 10/1 ANI		110	5550	18.00	18.50					
5.5GHz WLAN	802.11n-HT40 MCS0	126	5630	17.92	18.50	100.00				
		134	5670	17.95	18.50					
		142	5710	16.10	16.50					
		100	5500	16.48	17.00					
		116	5580	18.13	18.50					
	802.11ac-VHT20 MCS0	124	5620	17.92	18.50	400.00				
	802.11ac-VH120 MCS0	132	5660	17.90	18.50	100.00				
		140	5700	15.92	16.00					
		144	5720	15.77	16.00					
		102	5510	11.75	12.00					
		110	5550	17.95	18.50					
	802.11ac-VHT40 MCS0	126	5630	17.88	18.50	100.00				
		134	5670	17.93	18.50					
		142	5710	16.05	16.50					
		106	5530	11.20	11.50					
	802.11ac-VHT80 MCS0	122	5610	17.30	17.50	100.00				
		138	5690	15.68	16.00					

Report No. : FA661625-03

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %			
		149	5745	18.15	18.50				
	802.11a MCS0	157	5785	18.05	18.50	100.00			
		165	5825	17.95	18.50				
	802.11n-HT20 MCS0	149	5745	18.09	18.50				
		157	5785	17.90	18.50	100.00			
5.8GHz WLAN		165	5825	18.10	18.50				
	802.11n-HT40 MCS0	151	5755	18.05	18.50	100.00			
	802.1111-11140 WC30	159	5795	18.13	18.50	100.00			
		149	5745	18.05	18.50				
	802.11ac-VHT20 MCS0	157	5785	17.87	18.50	100.00			
		165	5825	18.06	18.50				
	802.11ac-VHT40 MCS0	151	5755	18.00 18.50		100.00			
	002.11ac-V11140 MC30	159	5795	18.12	18.50	100.00			
	802.11ac-VHT80 MCS0	155	5775	18.11	18.50	100.00			

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

Issued Date: May 18, 2017 Form version. : 170509 FCC ID: TX2-RTL8821CE Page 23 of 35

<5GHz WLAN Aux ANT>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %				
		36	5180	16.78	17.00					
	900 11a 6Mbna	40	5200	17.85	18.00	100.00				
	802.11a 6Mbps	44	5220	17.88	18.00	100.00				
		48	5240	16.99	17.00					
	802.11n-HT20 MCS0	36	5180	16.55	17.00					
		40	5200	17.95	18.00	100.00				
5.2GHz WLAN		44	5220	18.00	18.00	100.00				
5.2GHZ WLAN		48	5240	18.00	18.00					
	802.11n-HT40 MCS0	38 5190 12.17 12				100.00				
	602.1111-H140 MC30	46	5230	16.98	17.00	100.00				
		36	5180	16.50	17.00					
	802.11ac-VHT20 MCS0	40	5200	17.94	18.00	100.00				
	002.11ac-VH120 WC30	44	5220	17.98	18.00	100.00				
		48	5240	17.96	18.00					
	802.11ac-VHT40 MCS0	38	5190	12.15	12.50	100.00				
	002.11ac-VF140 WC30	46	5230	16.95	17.00	100.00				
	802.11ac-VHT80 MCS0	42	5210	10.88	11.00	100.00				

Report No.: FA661625-03

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %			
		52	5260	17.99	18.50				
	900 11a CMbna	56	5280	17.83	18.50	100.00			
	802.11a 6Mbps	60	5300	17.90	18.50	100.00			
		64	5320	18.22	18.50				
	802.11n-HT20 MCS0	52	5260	18.05	18.50				
		56	5280	18.02	18.50	100.00			
5.3GHz WLAN		60	5300	18.10	18.50	100.00			
5.3GHZ WLAIN		64	5320	18.09	18.50				
	802.11n-HT40 MCS0	54	5270	17.88	100.00				
	002.1111-H140 MC30	62	5310	13.17	13.50	100.00			
		52	5260	18.02	18.50				
	802.11ac-VHT20 MCS0	56	5280	18.00	18.50	100.00			
	002.11dC-VH120 WC30	60	5300	18.06	18.50	100.00			
		64	5320	18.05	18.50				
	802.11ac-VHT40 MCS0	54	5270	17.82	18.50	100.00			
	002.11ac-V1140 WC30	62	5310	13.10	13.50	100.00			
	802.11ac-VHT80 MCS0	58	5290	12.52	13.00	100.00			

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

Issued Date: May 18, 2017 Form version. : 170509 FCC ID: TX2-RTL8821CE Page 24 of 35

Report No. : FA661625-03

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %					
		100	5500	16.18	17.00						
		116	5580	18.18	18.50						
	902 11a 6Mbpa	124	5620	18.03	18.50	100.00					
	802.11a 6Mbps	132	5660	17.89	18.50	100.00					
		140	5700	17.07	17.50						
		144	5720	16.99	17.50						
		100	5500	16.54	17.00						
		116	5580	18.18	18.50						
	000 44 - LITOO MCCO	124	5620	18.05	18.50	400.00					
	802.11n-HT20 MCS0	132	5660	18.02	18.50	100.00					
		140	5700	15.99	16.00						
		144	5720	15.83	16.00						
		102	5510	11.88	12.00						
5 5011- VA/I ANI		110	5550	18.09	18.50						
5.5GHz WLAN	802.11n-HT40 MCS0	126	5630	17.95	18.50	100.00					
		134	5670	17.99	18.50						
		142	5710	16.12	16.50						
		100	5500	16.49	17.00						
		116	5580	18.14	18.50						
	000 44 1/1/1700 14000	124	5620	17.93	18.50	400.00					
	802.11ac-VHT20 MCS0	132	5660	17.92	18.50	100.00					
		140	5700	15.95	16.00						
		144	5720	15.80	16.00						
		102	5510	11.80	12.00						
		110	5550	17.98	18.50						
	802.11ac-VHT40 MCS0	126	5630	17.90	18.50	100.00					
		134	5670	17.95	18.50						
		142	5710	16.09	16.50						
		106	5530	11.25	11.50						
	802.11ac-VHT80 MCS0	122	5610	17.33	17.50	100.00					
		138	5690	15.70	16.00						

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %			
		149	5745	18.18	18.50				
	802.11a MCS0	157	5785	18.07	18.50	100.00			
		165	5825	17.96	18.50				
	802.11n-HT20 MCS0	149	5745	18.16	18.50				
		157	5785	17.95	18.50	100.00			
5.8GHz WLAN		165	5825	18.17	18.50				
	802.11n-HT40 MCS0	151	5755	18.13	18.50	100.00			
	802.1111-11140 MC30	159	5795	18.18	18.50	100.00			
		149	5745	18.07	18.50				
	802.11ac-VHT20 MCS0	157	5785	17.88	18.50	100.00			
		165	5825	18.07	18.50				
	802.11ac-VHT40 MCS0	151	5755	18.02	18.50	100.00			
	002.11ac-VH140 MC30	159	5795	18.14	18.50	100.00			
	802.11ac-VHT80 MCS0	155	5775	18.18	18.50	100.00			

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

Issued Date: May 18, 2017 Form version. : 170509 FCC ID: TX2-RTL8821CE Page 25 of 35

12. Bluetooth Exclusions Applied

<2.4GHz Bluetooth Main Ant and Aux Ant>

Mode Band	Average power(dBm)						
Mode Band	Bluetooth-BR/EDR	Bluetooth-LE					
2.4GHz Bluetooth	4	5					

Note:

1. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

Report No.: FA661625-03

- f(GHz) is the RF channel transmit frequency in GHz
- · Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison


Bluetooth Max Power (dBm) Separation Distance (mm)		Frequency (GHz)	exclusion thresholds		
5	< 5	2.48	0.94		


Note:

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.94 which is <= 3, SAR testing is not required.

SPORTON INTERNATIONAL INC.

13. Antenna Location

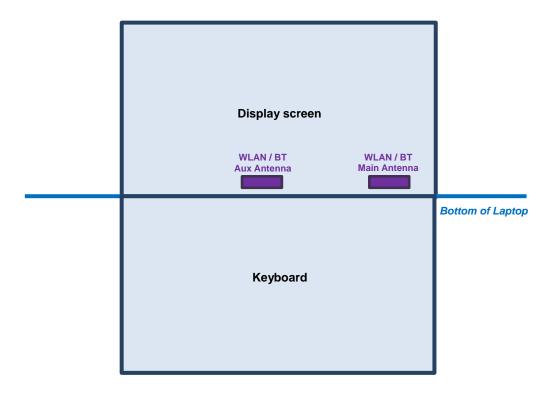

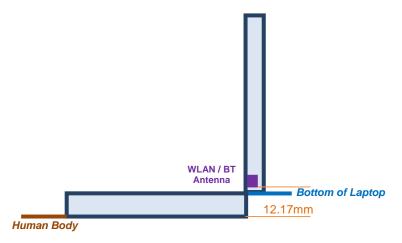

<Side View>

Report No.: FA661625-03

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: TX2-RTL8821CE

Issued Date: May 18, 2017 Form version: 170509

Page 27 of 35

14. SAR Test Results

General Note:

- 1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Report No.: FA661625-03

- b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
- c. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- 2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.

WLAN Note:

- 1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- 2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
- 3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
- 4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- $\hbox{5.} \quad \hbox{During SAR testing the WLAN transmission was verified using a spectrum analyzer.} \\$

FCC ID : TX2-RTL8821CE Page 28 of 35 Form version. : 170509



14.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Main	HONGLIN	6	2437	17.60	18.00	1.096	100	1.000	-0.03	0.328	0.360
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Main	HONGLIN	1	2412	16.08	16.50	1.102	100	1.000	-0.14	0.253	0.279
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Main	HONGLIN	11	2462	16.90	17.00	1.023	100	1.000	-0.13	0.278	0.284
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Main	ICT	6	2437	17.60	18.00	1.096	100	1.000	-0.17	0.139	0.152
01	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Main	Speedwire	6	2437	17.60	18.00	1.096	100	1.000	-0.1	0.356	0.390
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Aux	HONGLIN	6	2437	17.58	18.00	1.102	100	1.000	-0.1	0.238	0.262
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Aux	ICT	6	2437	17.58	18.00	1.102	100	1.000	-0.1	0.207	0.228
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Aux	Speedwire	6	2437	17.58	18.00	1.102	100	1.000	-0.14	0.257	0.283
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Main	HONGLIN	54	5270	17.85	18.50	1.161	100	1.000	-0.09	0.723	0.840
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Main	HONGLIN	64	5320	18.15	18.50	1.084	100	1.000	0.01	0.609	0.660
02	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Main	ICT	54	5270	17.85	18.50	1.161	100	1.000	-0.07	0.731	0.849
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Main	ICT	64	5320	18.15	18.50	1.084	100	1.000	-0.07	0.716	0.776
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Main	Speedwire	54	5270	17.85	18.50	1.161	100	1.000	-0.04	0.677	0.786
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	HONGLIN	54	5270	17.88	18.50	1.153	100	1.000	0.03	0.551	0.636
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	ICT	54	5270	17.88	18.50	1.153	100	1.000	-0.11	0.540	0.623
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	Speedwire	54	5270	17.88	18.50	1.153	100	1.000	-0.03	0.428	0.494
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Main	HONGLIN	110	5550	18.00	18.50	1.122	100	1.000	0.01	0.720	0.808
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Main	HONGLIN	134	5670	17.95	18.50	1.135	100	1.000	-0.02	0.906	1.028
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Main	ICT	134	5670	17.95	18.50	1.135	100	1.000	-0.1	1.020	1.158
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Main	ICT	110	5550	18.00	18.50	1.122	100	1.000	-0.03	0.877	0.984
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Main	Speedwire	134	5670	17.95	18.50	1.135	100	1.000	-0.03	0.949	1.077
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Main	Speedwire	110	5550	18.00	18.50	1.122	100	1.000	0.05	0.753	0.845
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	HONGLIN	110	5550	18.09	18.50	1.099	100	1.000	0.19	0.867	0.953
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	HONGLIN	134	5670	17.99	18.50	1.125	100	1.000	0.02	1.020	1.147
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	ICT	134	5670	17.99	18.50	1.125	100	1.000	-0.11	0.966	1.086
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	ICT	110	5550	18.09	18.50	1.099	100	1.000	0.11	0.822	0.903
03	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	Speedwire	134	5670	17.99	18.50	1.125	100	1.000	-0.17	1.050	1.181
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	Speedwire	110	5550	18.09	18.50	1.099	100	1.000	0.12	0.954	1.048
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Main	HONGLIN	155	5775	18.11	18.50	1.094	100	1.000	-0.07	0.852	0.932
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Main	ICT	155	5775	18.11	18.50	1.094	100	1.000	-0.11	0.821	0.898
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Main	Speedwire	155	5775	18.11	18.50	1.094	100	1.000	-0.1	0.776	0.849
04	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Aux	HONGLIN	155	5775	18.18	18.50	1.076	100	1.000	-0.11	1.070	1.152
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Aux	ICT	155	5775	18.18	18.50	1.076	100	1.000	-0.07	0.890	0.958
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Aux	Speedwire	155	5775	18.18	18.50	1.076	100	1.000	-0.08	1.010	1.087

Report No. : FA661625-03

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

Issued Date: May 18, 2017 Form version. : 170509 FCC ID: TX2-RTL8821CE Page 29 of 35

14.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Ch.	Freq. (MHz)	Power		Tune-up Scaling Factor			Drift	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	Speedwire	134	5670	17.99	18.50	1.125	100	1.000	-0.17	1.050		1.181
2nd	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0mm	Aux	Speedwire	134	5670	17.99	18.50	1.125	100	1.000	-0.1	1.010	1.04	1.136
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Aux	HONGLIN	155	5775	18.18	18.50	1.076	100	1.000	-0.11	1.070		1.152
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0mm	Aux	HONGLIN	155	5775	18.18	18.50	1.076	100	1.000	0.06	0.987	1.08	1.062

Report No.: FA661625-03

General Note:

- 1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
- 2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
- 3. The ratio is the difference in percentage between original and repeated measured SAR.
- 4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Support
1.	2.4GHz WLAN + 5GHz WLAN	No
2.	2.4GHz WLAN + Bluetooth	No
3.	5GHz WLAN + Bluetooth	Yes

General Note:

1. The EUT supports the antenna with TX/RX diversity function for WLAN and Bluetooth. (Ex. Assume main antenna was selected to conduct transmitting function in WLAN, so aux antenna was selected in Bluetooth mode. Vice versa.) WLAN 2.4GHz and Bluetooth will be transmitting from the different antennas; WLAN 5GHz and Bluetooth will be transmitting from the same antenna.

Report No.: FA661625-03

- 2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- 3. The Scaled SAR summation is calculated based on the same configuration and test position.
- 4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) SPLSR = (SAR1 + SAR2)^1.5 / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x1-x2)2 + (y1-y2)2 + (z1-z2)2], where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - i) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[$\sqrt{f(GHz)/x}$] W/kg for test separation distances \leq 50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
 - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	All Positions		
5dBm	Estimated 1g SAR (W/kg)	0.126W/kg		

15.1 Body Exposure Conditions

	1	2	1+2 Summed		
Exposure Position	5GHz WLAN	Bluetooth			
	1g SAR (W/kg)	Estimated 1g SAR (W/kg)	1g SAR (W/kg)		
Bottom of Laptop at 0mm	1.181	0.126	1.307		

Test Engineer: Steven Chang Poa Pan Galen Zhang and Iran Wang

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: May 18, 2017

FCC ID : TX2-RTL8821CE Page 31 of 35 Form version. : 170509

16. Uncertainty Assessment

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

Report No.: FA661625-03

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b) κ is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: May 18, 2017 Form version. : 170509

FCC ID: TX2-RTL8821CE Page 32 of 35

SPORTON LAB. FCC SAR Test Report

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.00	N	1	1	1	6.0	6.0
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.00	R	1.732	1	1	0.6	0.6
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	2.90	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.00	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.03	N	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.10	R	1.732	1	1	3.5	3.5
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Cor	mbined Std. Ur	ncertainty				11.6%	11.6%
Co	verage Factor	for 95 %				K=2	K=2
Exp	oanded STD Ur	ncertainty				23.2%	23.1%

Report No.: FA661625-03

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

FCC ID : TX2-RTL8821CE Page 33 of 35 Form version. : 170509

SPORTON LAB. FCC SAR Test Report

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.55	Ν	1	1	1	6.6	6.6
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	Ν	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.03	Ν	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.60	R	1.732	1	1	3.8	3.8
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Cor	mbined Std. Ur	certainty				12.7%	12.6%
Co	verage Factor	for 95 %				K=2	K=2
Exp	oanded STD Ur	certainty				25.4%	25.3%

Table 16.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

Page 34 of 35

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: TX2-RTL8821CE

Issued Date: May 18, 2017

Report No.: FA661625-03

Form version. : 170509

17. References

[1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"

Report No.: FA661625-03

- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.