



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	<b>Realtek Semiconductor Corp.</b>
Applicant Address	No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan
FCC ID	<b>TX2-RTL8822BE</b>
Manufacturer's company	<b>Realtek Semiconductor Corp.</b>
Manufacturer Address	No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan

Product Name	802.11a/b/g/n/ac RTL8822BE Combo module
Brand Name	REALTEK
Model Name	RTL8822BE
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2402 ~ 2480MHz
Received Date	May 19, 2016
Final Test Date	Aug. 12, 2016
Submission Type	Original Equipment

### Statement

**Test result included is only for the Bluetooth BR/EDR of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, DA-00705** and

**47 CFR FCC Part 15 Subpart C.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies .....	5
3.5. Table for Test Modes.....	5
3.6. Table for Testing Locations.....	7
3.7. Table for Multiple List.....	7
3.8. Table for Supporting Units .....	8
3.9. EUT Operation during Test .....	9
3.10. Duty Cycle .....	9
3.11. Test Configurations .....	10
<b>4. TEST RESULT .....</b>	<b>13</b>
4.1. AC Power Line Conducted Emissions Measurement.....	13
4.2. Maximum Conducted Output Power Measurement.....	17
4.3. Hopping Channel Separation Measurement .....	19
4.4. Number of Hopping Frequency Measurement.....	30
4.5. Dwell Time Measurement.....	32
4.6. Radiated Emissions Measurement.....	39
4.7. Emissions Measurement.....	60
4.8. Antenna Requirements .....	94
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>95</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>96</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A11</b>
<b>APPENDIX B. TEST RESULTS OF RADIATED EMISSION CO-LOCATION</b>	
<b>APPENDIX C. ANTENNA LIST</b>	



## History of This Test Report



## 1. VERIFICATION OF COMPLIANCE

Product Name : 802.11a/b/g/n/ac RTL8822BE Combo module  
Brand Name : REALTEK  
Model No. : RTL8822BE  
Applicant : Realtek Semiconductor Corp.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on May 19, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

  
Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C			
Part	Rule Section	Description of Test	Result
4.1	15.207	AC Power Line Conducted Emissions	Complies
4.2	15.247(b)(1)	Maximum Conducted Output Power	Complies
4.3	15.247(a)(1)	Hopping Channel Separation	Complies
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies
4.5	15.247(a)(1)	Dwell Time	Complies
4.6	15.247(d)	Radiated Emissions	Complies
4.7	15.247(d)	Band Edge Emissions	Complies
4.8	15.203	Antenna Requirements	Complies

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Power Type	From host system
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -DQPSK: 2 ; 8DPSK: 3
Frequency Range	2402 ~ 2480MHz
Channel Number	79
Channel Bandwidth (99%)	BR (GFSK) 1 Mbps: 903.0390 MHz EDR ( $\pi/4$ -DQPSK) 2 Mbps: 1.1810 MHz EDR (8DPSK) 3 Mbps: 1.2290 MHz
Maximum Conducted Peak Output Power	BR (GFSK) 1 Mbps: 5.79 dBm EDR ( $\pi/4$ -DQPSK) 2 Mbps: 4.76 dBm EDR (8DPSK) 3 Mbps: 4.72 dBm
Maximum Conducted Average Output Power	BR (GFSK) 1 Mbps: 5.74 dBm EDR ( $\pi/4$ -DQPSK) 2 Mbps: 4.72 dBm EDR (8DPSK) 3 Mbps: 4.69 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3
Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).	
Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).	

#### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	PSA	RFDPA171320EMLB301	Dipole Antenna	I-PEX	3.14	5
2	LYNwave	ALA110-222050-300011	PIFA Antenna	I-PEX	3.5	5

Note: The EUT has two types of antenna and there are two antennas for each set.

**For 2.4GHz function:**

**For IEEE 802.11b/g/n/ac mode (1TX/1RX):**

The EUT supports the antenna with TX and RX diversity functions.

Both Chain 1 and Chain 2 support transmit and receive functions, but only one of them will be used at one time.

The Chain 1 generated the worst case, so it was selected to test and record in the report.

**For IEEE 802.11g/n/ac mode (2TX/2RX):**

Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could transmit/receive simultaneously.

**For 5GHz function:**

**For IEEE 802.11a/n/ac mode (1TX/1RX):**

The EUT supports the antenna with TX and RX diversity functions.

Both Chain 1 and Chain 2 support transmit and receive functions, but only one of them will be used at one time.

The Chain 2 generated the worst case, so it was selected to test and record in the report.


**For IEEE 802.11a/n/ac mode (2TX/2RX):**

Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could transmit/receive simultaneously.

**For Bluetooth function:**

Only Chain 2 can be used as transmitting/receiving functions.



### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	BR (GFSK)	1 Mbps	0/39/78	1
	EDR ( $\pi/4$ -DQPSK)	2 Mbps	0/39/78	1
	EDR (8DPSK)	3 Mbps	0/39/78	1
Hopping Channel Separation	EDR (8DPSK)	3 Mbps	0~1 39~40 77~78	1
Number of Hopping Frequency	EDR (8DPSK)	3 Mbps	0~78	1
Dwell Time	BR (GFSK) (DH1, DH3, DH5)	1 Mbps	0/39/78	1
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	BR (GFSK)	1 Mbps	0/39/78	1
	EDR (8DPSK)	3 Mbps	0/39/78	1
Band Edge Emissions	BR (GFSK)	1 Mbps	0/39/78	1
	EDR (8DPSK)	3 Mbps	0/39/78	1

The following test modes were performed for all tests:

Conducted Emissions	
Test Mode	Description
1	EUT 1 with Ant.2 (wireless 2.4GHz + Bluetooth4.0)
2	EUT 1 with Ant.2 (wireless 5GHz + Bluetooth4.0)
Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	EUT 2 with Ant.2 (wireless 2.4GHz + Bluetooth4.0)
Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.	
4	EUT 1 with Ant.1 (wireless 2.4GHz + Bluetooth4.0)
Mode 1 generated the worst test result, so it was recorded in this report.	

Radiated Emissions (Below 1GHz)	
Test Mode	Description
1	EUT 1 Y axis with Ant.2 (wireless 2.4GHz + Bluetooth4.0)
2	EUT 1 Y axis with Ant.2 (wireless 5GHz + Bluetooth4.0)
Mode 2 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	EUT 1 Z axis with Ant.2 (wireless 5GHz + Bluetooth4.0)
Mode 3 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.	
4	EUT 2 Z axis with Ant.2 (wireless 5GHz + Bluetooth4.0)
Mode 4 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5 will follow this same test mode.	
5	EUT 2 Z axis with Ant.1 (wireless 5GHz + Bluetooth4.0)
Mode 4 and Mode 5 generated the worst test result, so it was recorded in this report.	

Radiated Emissions (Above 1GHz)	
Test Mode	Description
1	EUT 1 X axis with Ant.1
2	EUT 1 Y axis with Ant.2

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	Normal Link
1	EUT 1 X axis with Ant.2 (wireless 2.4GHz + Bluetooth4.0)
2	EUT 1 Y axis with Ant.2 (wireless 2.4GHz + Bluetooth4.0)
3	EUT 1 Z axis with Ant.2 (wireless 2.4GHz + Bluetooth4.0)
Mode 2 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4~6 will follow this same test mode.	
4	EUT 1 Y axis with Ant.2 (wireless 5GHz + Bluetooth4.0)
5	EUT 1 Y axis with Ant.1 (wireless 2.4GHz + Bluetooth4.0)
6	EUT 1 Y axis with Ant.1 (wireless 5GHz + Bluetooth4.0)
Refer to Sporton Test Report No.: FA651715 for Co-location RF Exposure Evaluation and Appendix B for Radiated Emission Co-location. (Mode 2 and Mode 4 generated the worst test result, so it was recorded.)	

Note: For Conducted measurement Test: only the higher gain antenna "Ant. 2" was selected to perform the test and recorded in this report.

### 3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Multiple List

The EUT has two types, which are identical to each other in all aspects except for the following table:

Brand Name	Model Name	EUT	Interface for platform
REALTEK	RTL8822BE	EUT 1	PCIE
		EUT 2	USB

### 3.8. Table for Supporting Units

For Test Site No: 03CH01-CB below 1GHz

Support Unit	Brand	Model	FCC ID
NB*2	DELL	E4300	DoC
Device	REALTEK	RTL8822BE	TX2-RTL8822BE
Test fixture*2	REALTEK	N/A	N/A
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A
WLAN AP	D-LINK	DIR860L	KA2IR860LA1

For Test Site No: 03CH01-CB above 1GHz and TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
Test fixture	REALTEK	N/A	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*2	DELL	E6430	DoC
Device	REALTEK	RTL8822BE	TX2-RTL8822BE
Test fixture*2	REALTEK	N/A	N/A
Earphone	e-Power	S90W	DoC
Mouse	HP	FM100	DoC
AP Router	Planex	GW-AP54SGX	KA220030603014-1

### Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of Bluetooth

For BR (GFSK) 1 Mbps:

Test Software Version	Bluetooth MP Tool		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	default	default	default

For EDR ( $\pi/4$ -DQPSK) 2 Mbps:

Test Software Version	Bluetooth MP Tool		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	default	default	default

For EDR (8DPSK) 3 Mbps:

Test Software Version	Bluetooth MP Tool		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	default	default	default

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/I Minimum VBW (kHz)
EDR (8DPSK)	5.800	100.000	5.80%	12.37	0.17

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

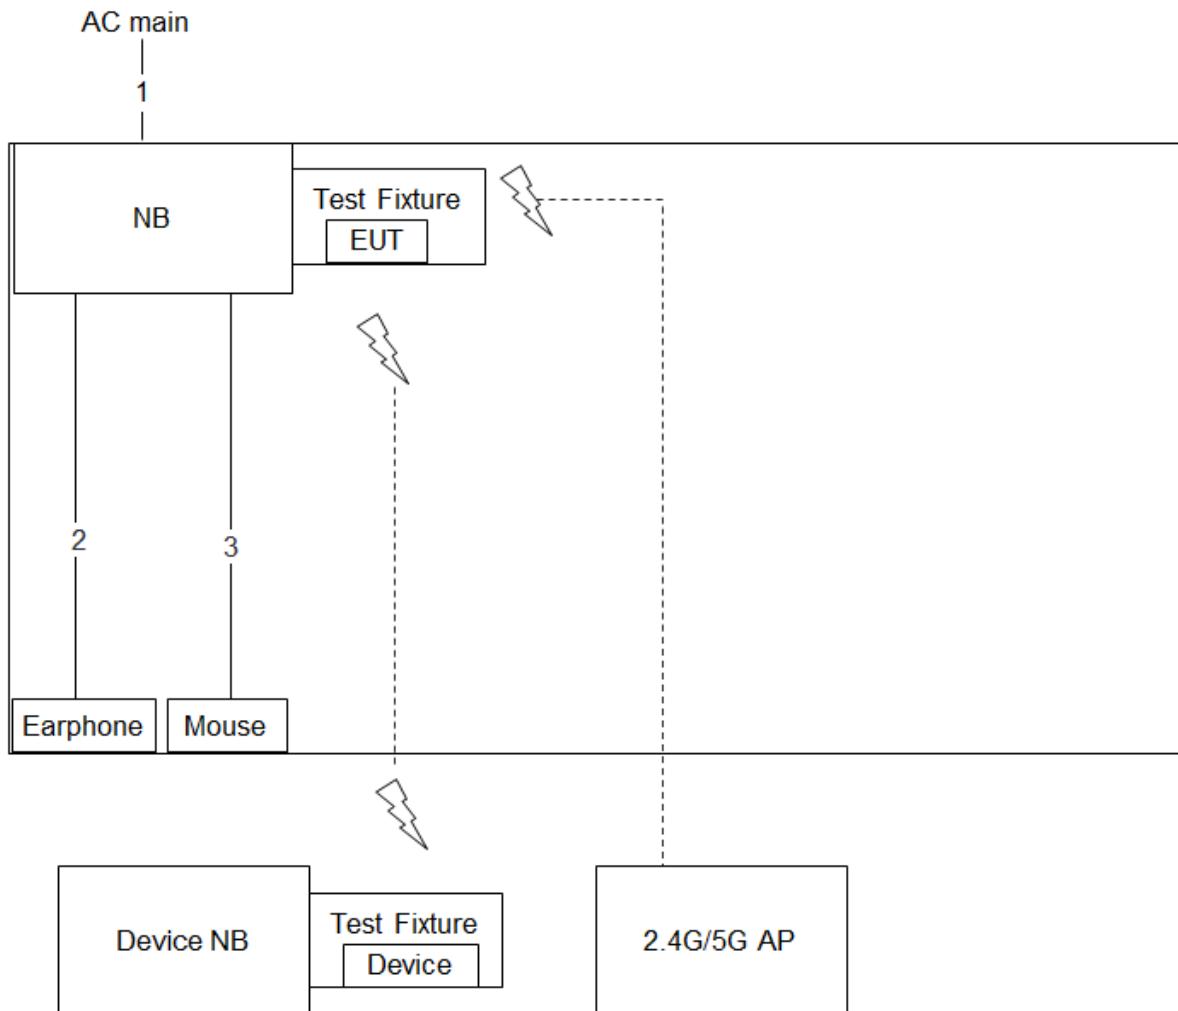

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	Audio cable	No	1.5m
3	USB cable	Yes	1.8m


### 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

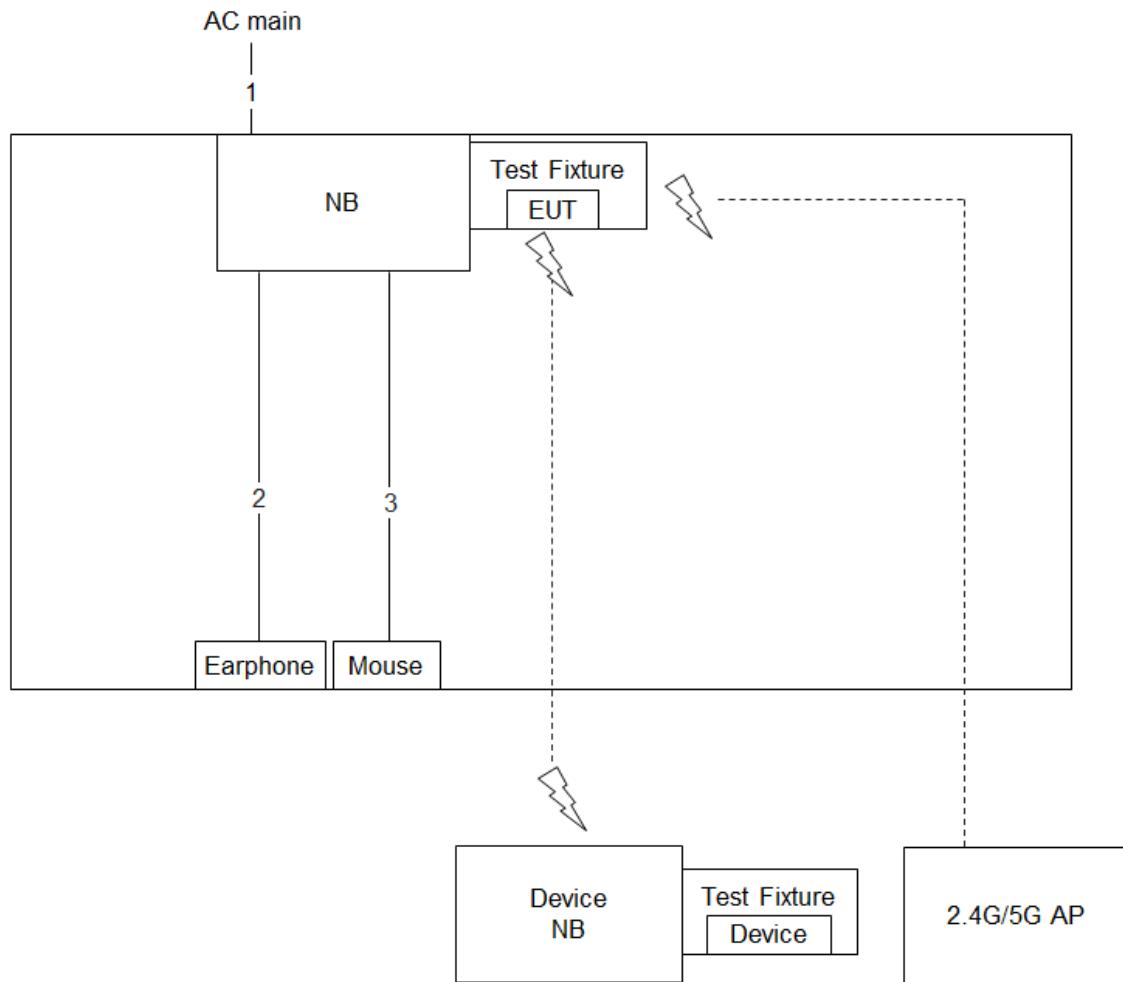

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	Audio cable	No	1.1m
3	USB cable	Yes	1.8m

Test Configuration: above 1GHz

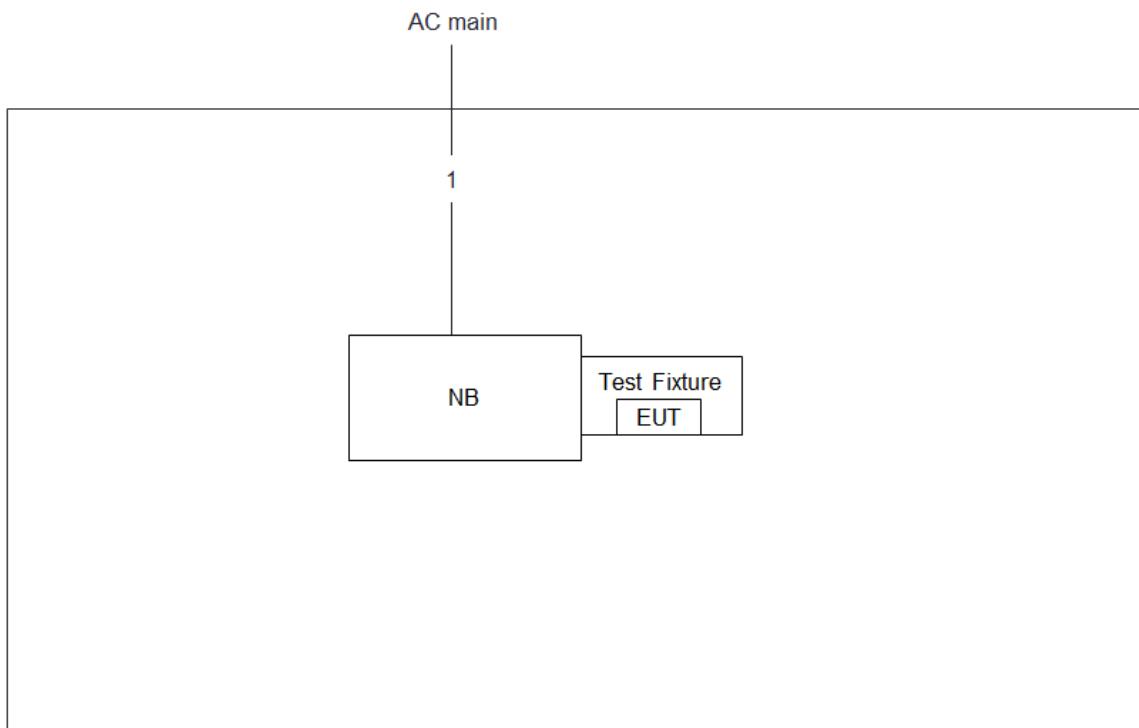

Item	Connection	Shielded	Length
1	Power cable	No	2.6m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

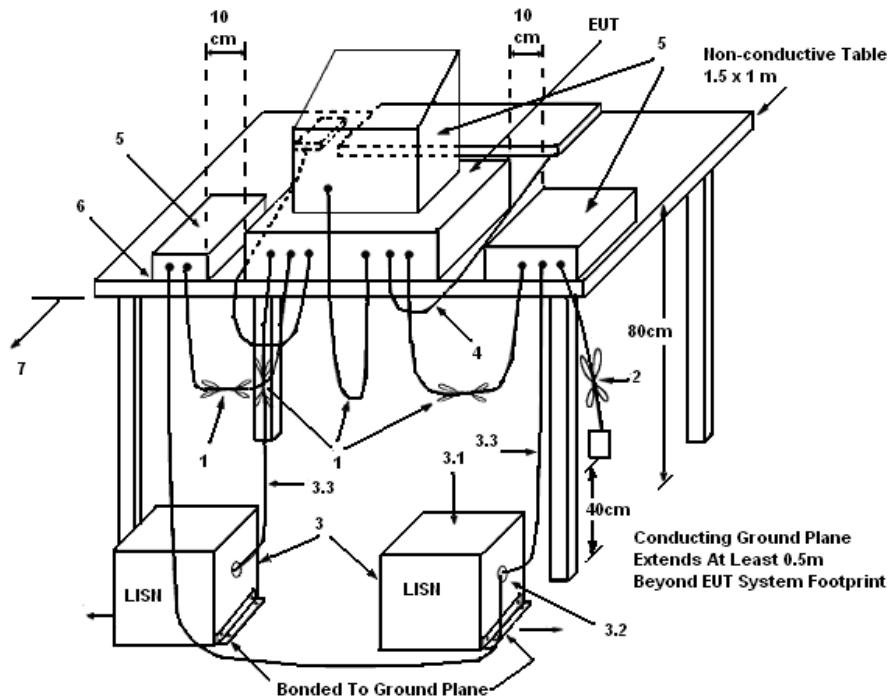

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	60%
Test Engineer	Deven Huang	Phase	Line
Configuration	Normal Link / Mode 1		

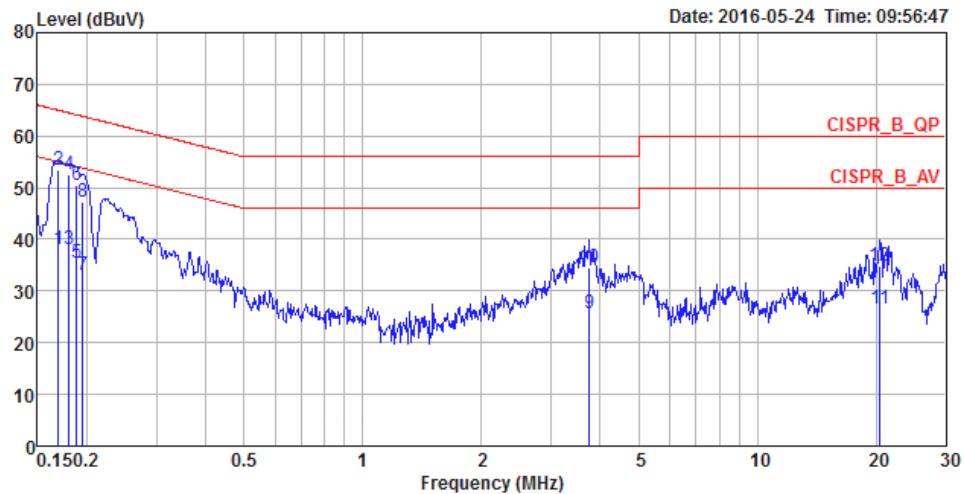

Freq	Level	Over Limit	Limit Line	Read		LISN	Cable	Pol/Phase	Remark
				Level	Factor				
MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB		
1	0.1694	38.03	-16.96	54.99	27.99	10.02	0.02	LINE	Average
2	0.1694	53.36	-11.63	64.99	43.32	10.02	0.02	LINE	QP
3	0.1806	38.09	-16.37	54.46	28.15	9.92	0.02	LINE	Average
4	0.1806	52.41	-12.05	64.46	42.47	9.92	0.02	LINE	QP
5	0.1884	35.48	-18.63	54.11	25.54	9.92	0.02	LINE	Average
6	0.1884	50.36	-13.75	64.11	40.42	9.92	0.02	LINE	QP
7	0.1955	32.96	-20.84	53.80	23.02	9.92	0.02	LINE	Average
8	0.1955	47.27	-16.53	63.80	37.33	9.92	0.02	LINE	QP
9	3.7594	25.56	-20.44	46.00	15.50	9.99	0.07	LINE	Average
10	3.7594	34.52	-21.48	56.00	24.46	9.99	0.07	LINE	QP
11	20.4855	26.67	-23.33	50.00	16.09	10.32	0.26	LINE	Average
12	20.4855	34.84	-25.16	60.00	24.26	10.32	0.26	LINE	QP

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Deven Huang	<b>Phase</b>	Neutral
<b>Configuration</b>	Normal Link / Mode 1		

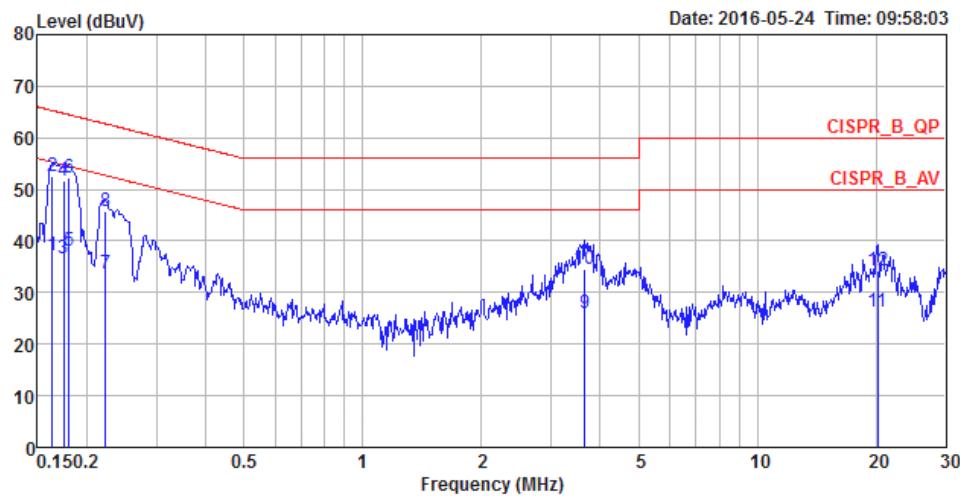

Freq	Over Limit		Read Line Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	Level	Limit					
1 0.1633	37.31	-17.99	55.30	27.27	10.02	0.02	NEUTRAL Average
2 0.1633	52.47	-12.83	65.30	42.43	10.02	0.02	NEUTRAL QP
3 0.1749	36.55	-18.17	54.72	26.61	9.92	0.02	NEUTRAL Average
4 0.1749	51.66	-13.06	64.72	41.72	9.92	0.02	NEUTRAL QP
5 0.1806	38.09	-16.37	54.46	28.15	9.92	0.02	NEUTRAL Average
6 0.1806	52.36	-12.10	64.46	42.42	9.92	0.02	NEUTRAL QP
7 0.2232	33.77	-18.93	52.70	23.82	9.92	0.03	NEUTRAL Average
8 0.2232	45.83	-16.87	62.70	35.88	9.92	0.03	NEUTRAL QP
9 3.6611	25.98	-20.02	46.00	15.93	9.99	0.06	NEUTRAL Average
10 3.6611	34.64	-21.36	56.00	24.59	9.99	0.06	NEUTRAL QP
11 20.1625	26.20	-23.80	50.00	15.63	10.31	0.26	NEUTRAL Average
12 20.1625	34.34	-25.66	60.00	23.77	10.31	0.26	NEUTRAL QP

Note:

Level = Read Level + LISN Factor + Cable Loss

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm).

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak and Average

### 4.2.3. Test Procedures

This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

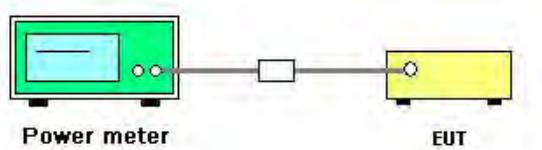

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK
Test Date	Aug. 11, 2016 ~ Aug. 12, 2016		

For BR (GFSK) 1 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	5.69	5.62	21.00	Complies
39	2441 MHz	5.79	5.74	21.00	Complies
78	2480 MHz	5.49	5.45	21.00	Complies

For EDR ( $\pi/4$ -DQPSK) 2 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	5.69	4.57	21.00	Complies
39	2441 MHz	5.79	4.72	21.00	Complies
78	2480 MHz	5.49	4.41	21.00	Complies

For EDR (8DPSK) 3 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	4.71	4.52	21.00	Complies
39	2441 MHz	4.72	4.69	21.00	Complies
78	2480 MHz	4.51	4.43	21.00	Complies

### 4.3. Hopping Channel Separation Measurement

#### 4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively,

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VBW	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

#### 4.3.4. Test Setup Layout

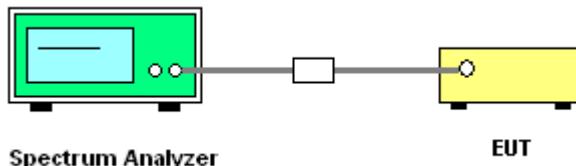

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Hopping Channel Separation

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK

For BR (GFSK) 1 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.0300	894.3560	1.00	0.687	Complies
2441 MHz	1.0350	903.0390	1.00	0.690	Complies
2480 MHz	1.0350	903.0390	1.00	0.690	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR ( $\pi/4$ -DQPSK) 2 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.3300	1.1810	1.00	0.887	Complies
2441 MHz	1.3300	1.1810	1.00	0.887	Complies
2480 MHz	1.3390	1.1810	1.00	0.893	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth


For EDR (8DPSK) 3 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.3650	1.2240	1.00	0.910	Complies
2441 MHz	1.3610	1.2240	1.00	0.907	Complies
2480 MHz	1.3650	1.2290	1.00	0.910	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth


### Dipole Antenna

#### 20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 0 / 2402 MHz

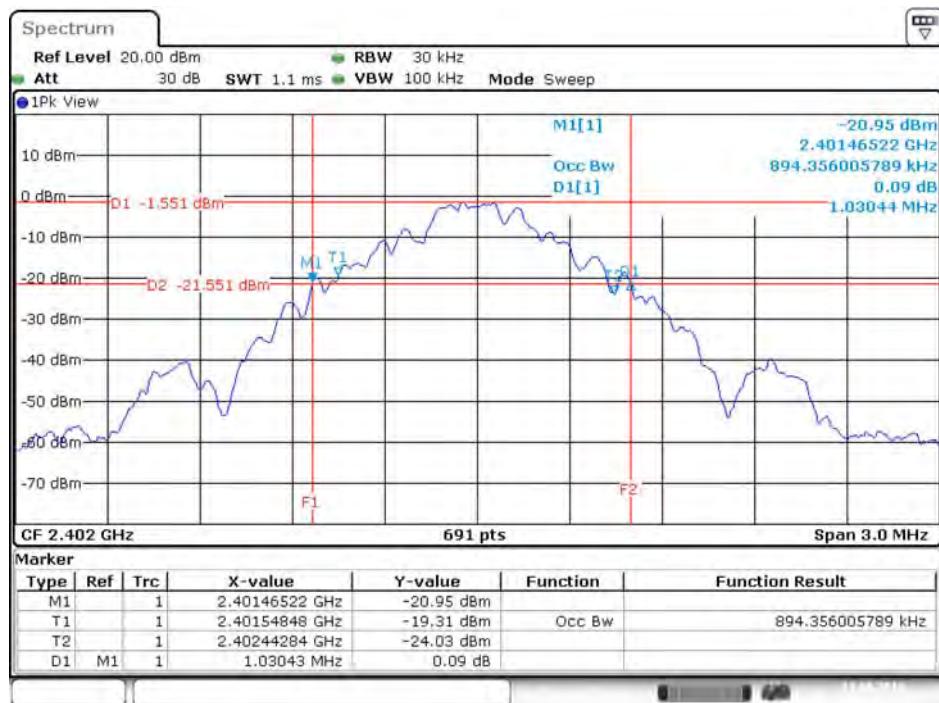


Date: 11.AUG.2016 23:25:59


#### 20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 39 / 2441 MHz

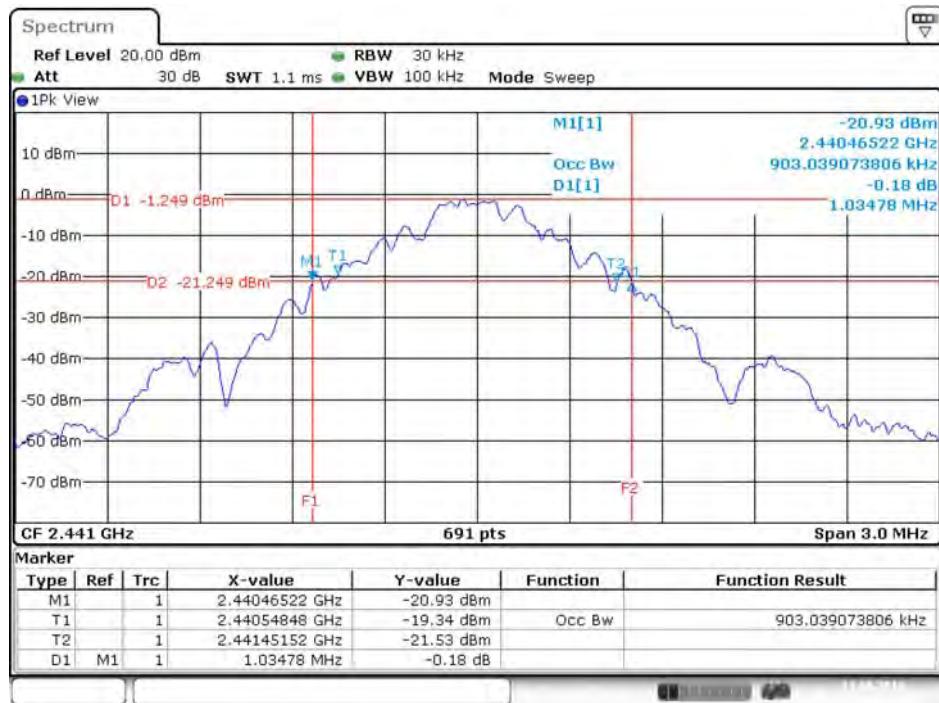



Date: 11.AUG.2016 23:26:38

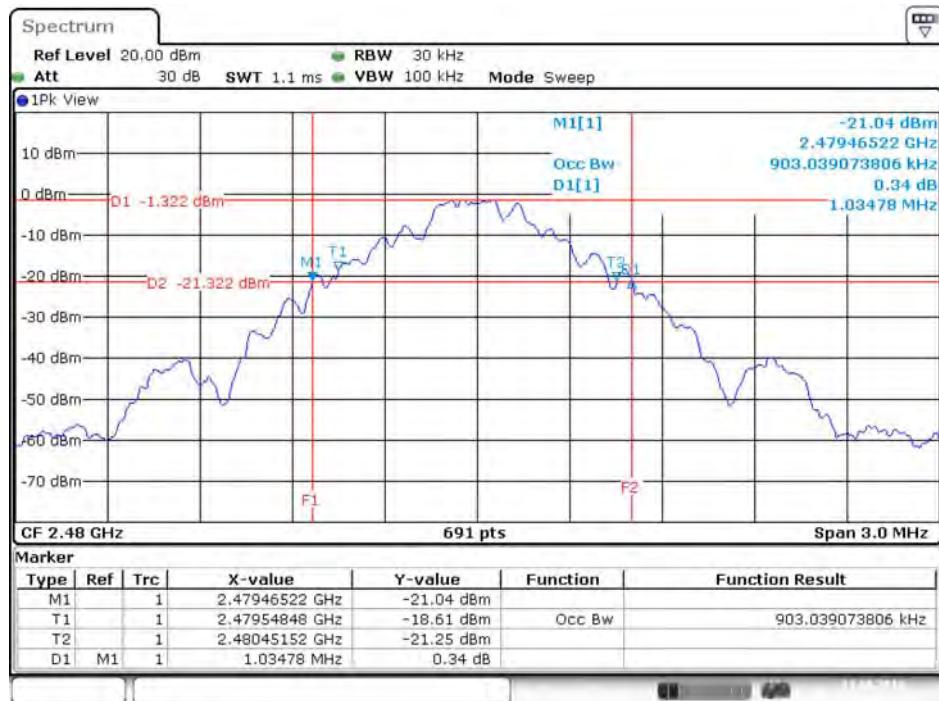
**20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 78 / 2480 MHz**


Date: 11.AUG.2016 23:27:21

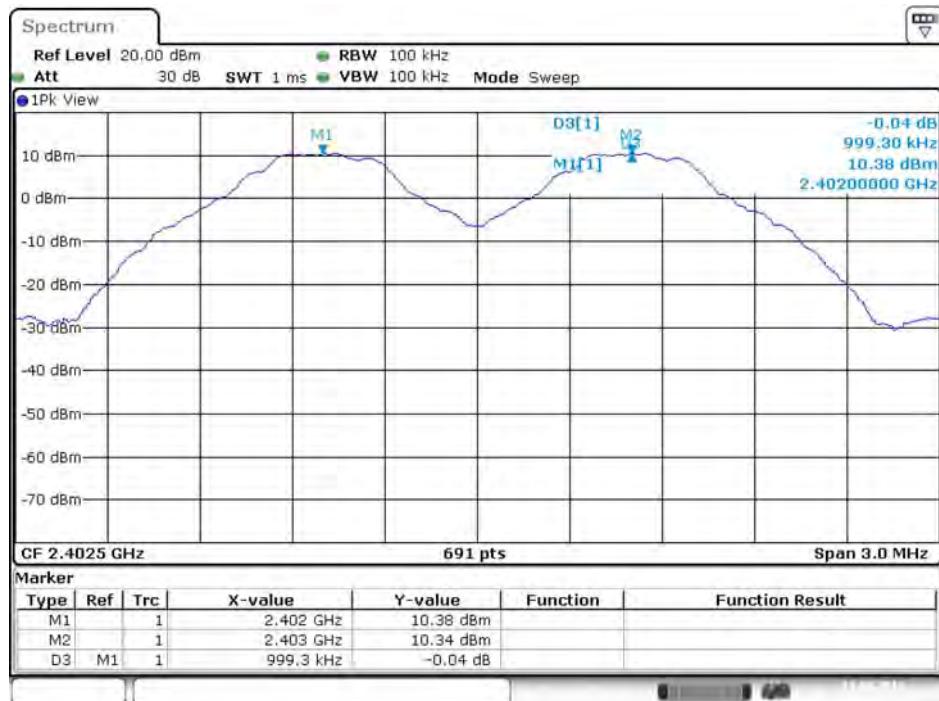
**Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz**


Date: 11.AUG.2016 23:48:56

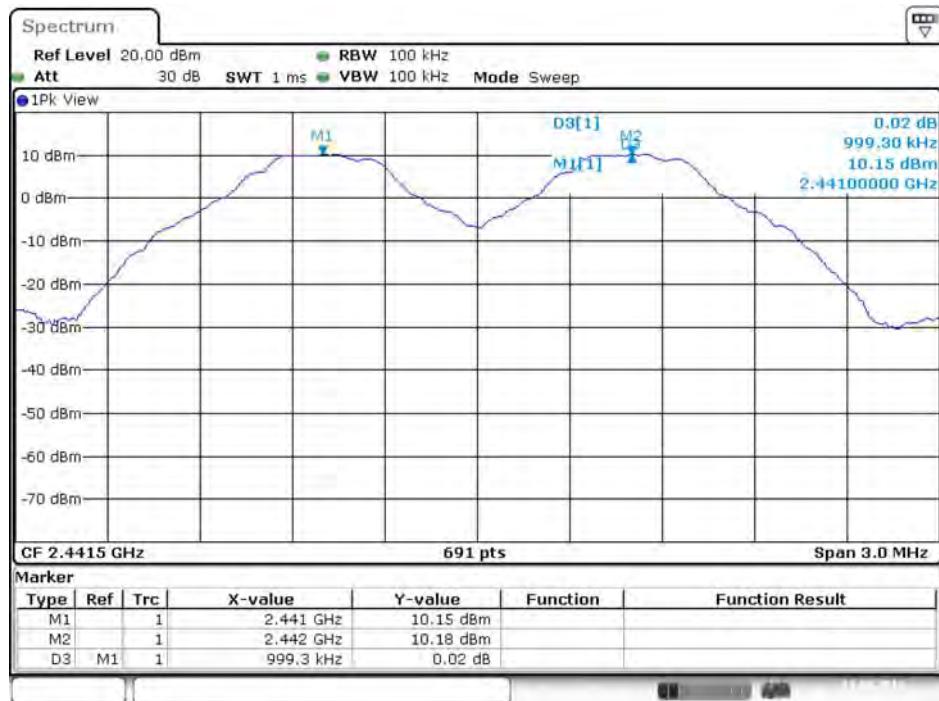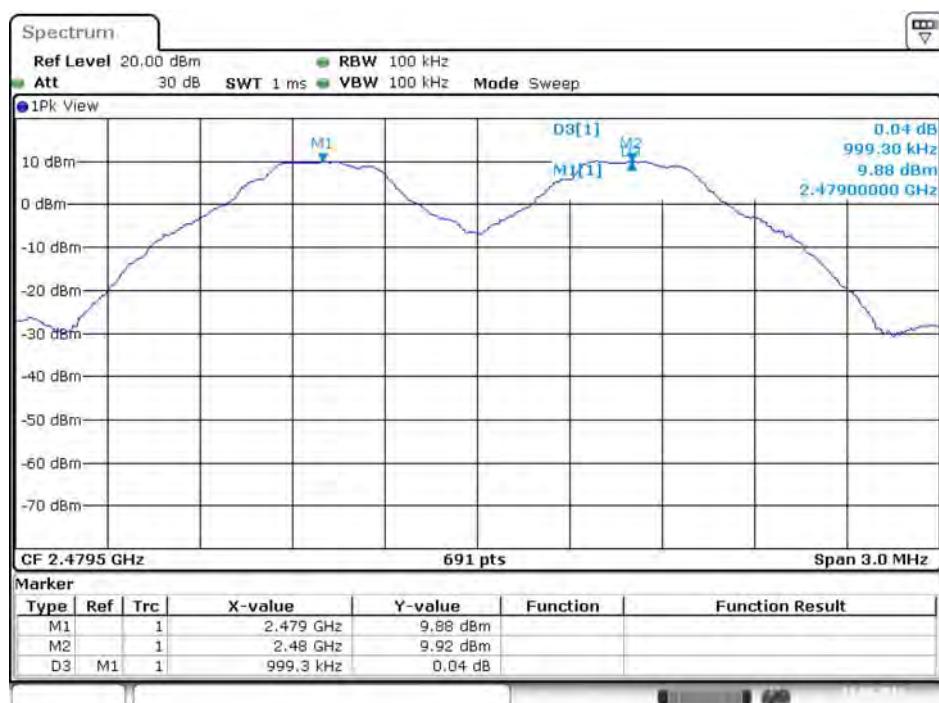
**Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz**

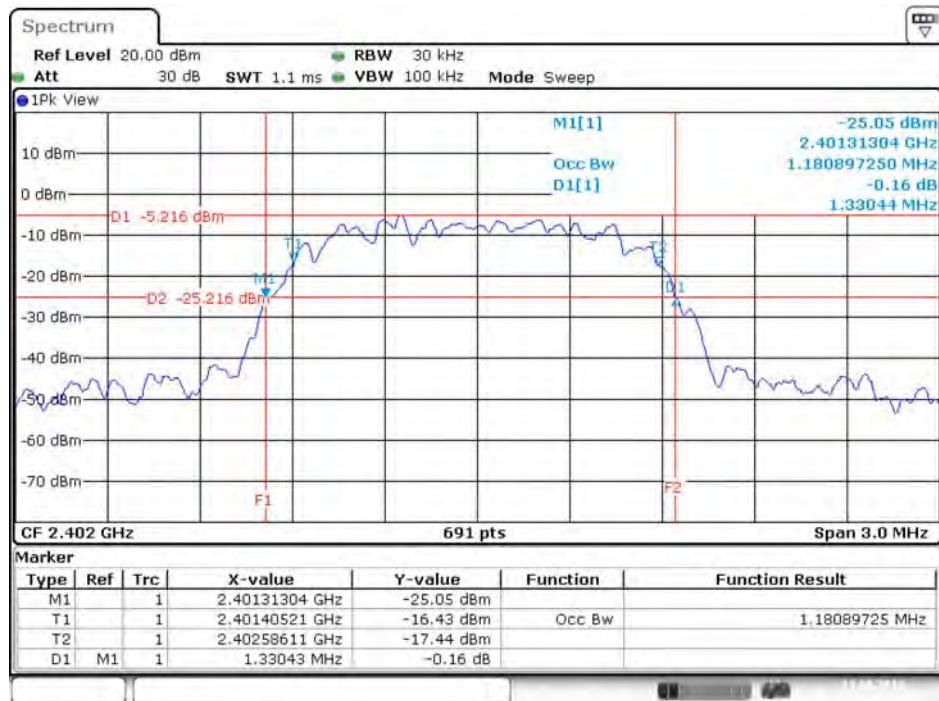**Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz**


**20 dB Bandwidth Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 0 / 2402 MHz**

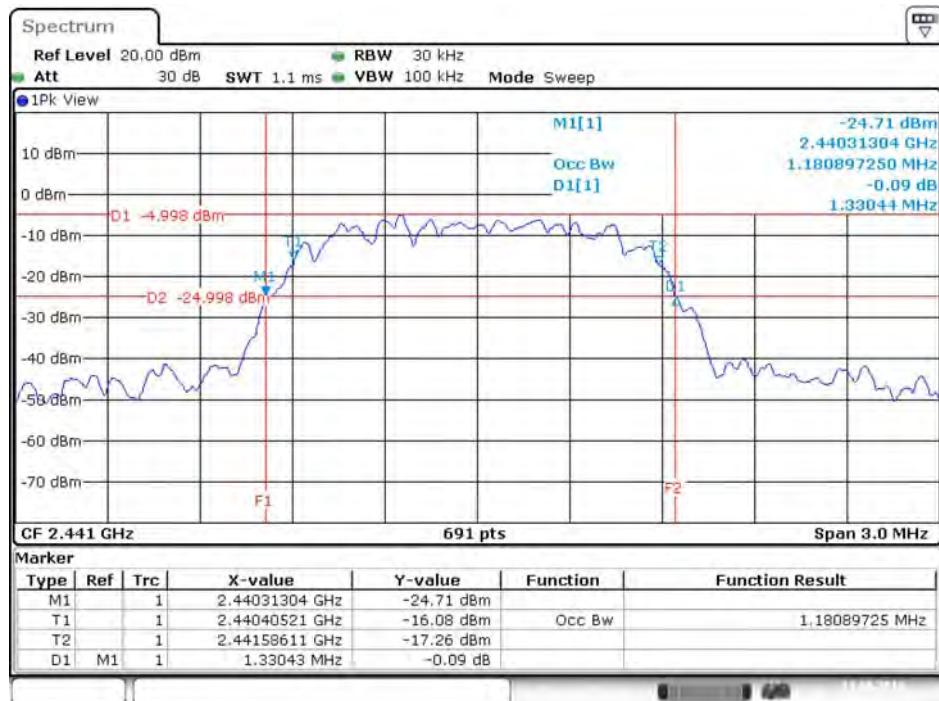
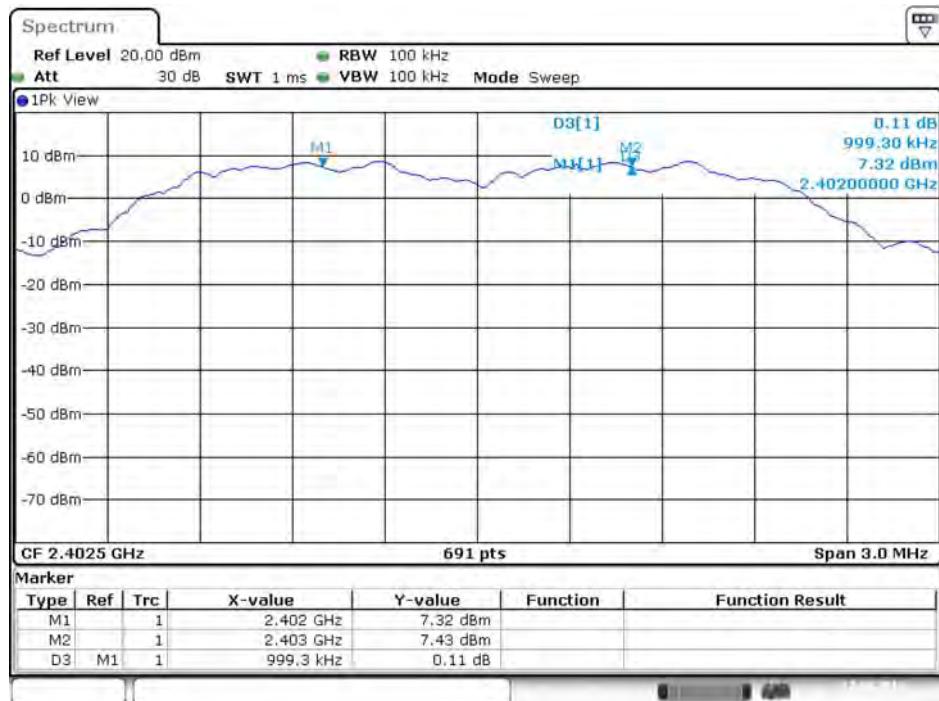
Date: 11.AUG.2016 23:37:13

**20 dB Bandwidth Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 39 / 2441 MHz**

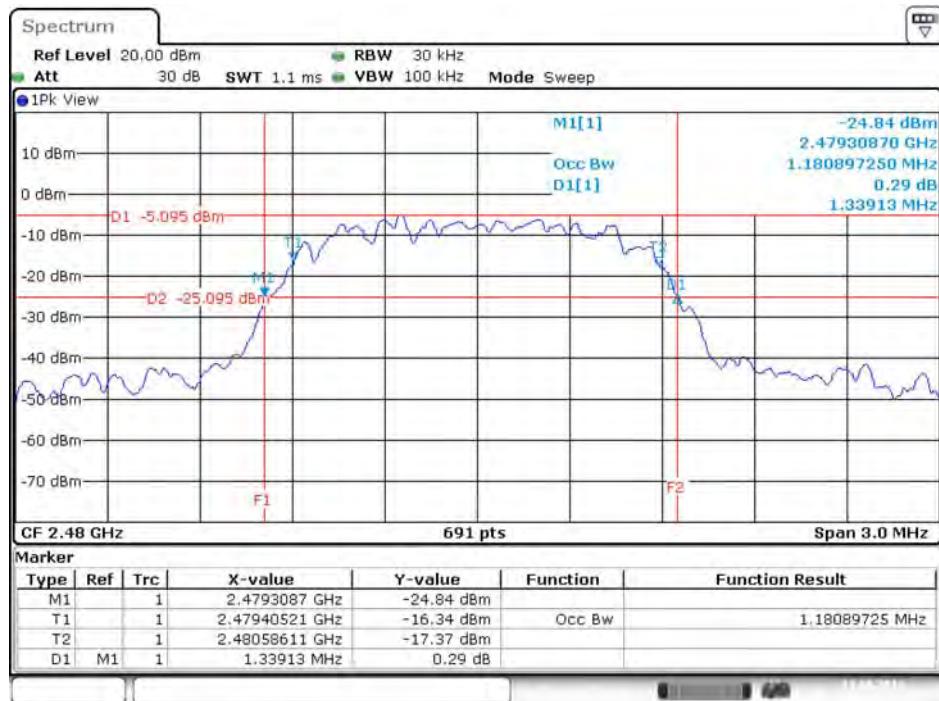
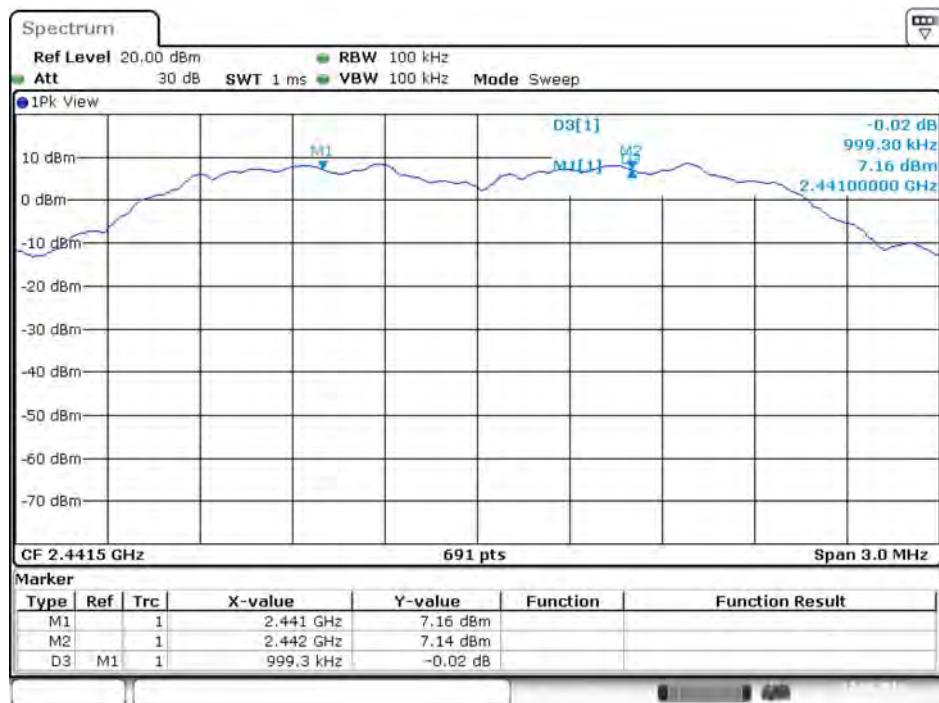
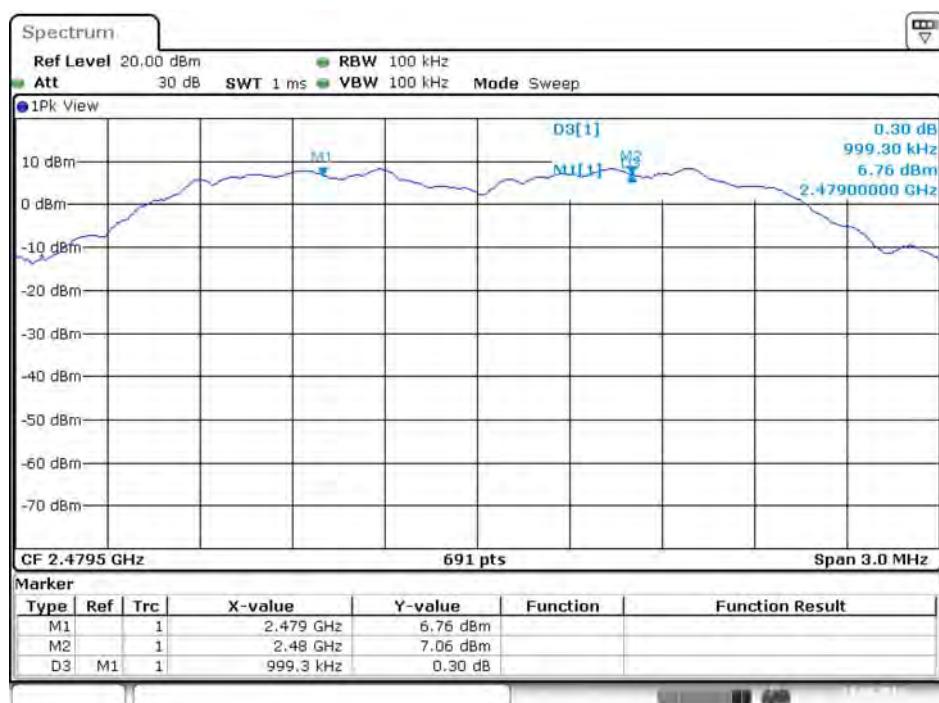
Date: 11.AUG.2016 23:37:44



**20 dB Bandwidth Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 78 / 2480 MHz**


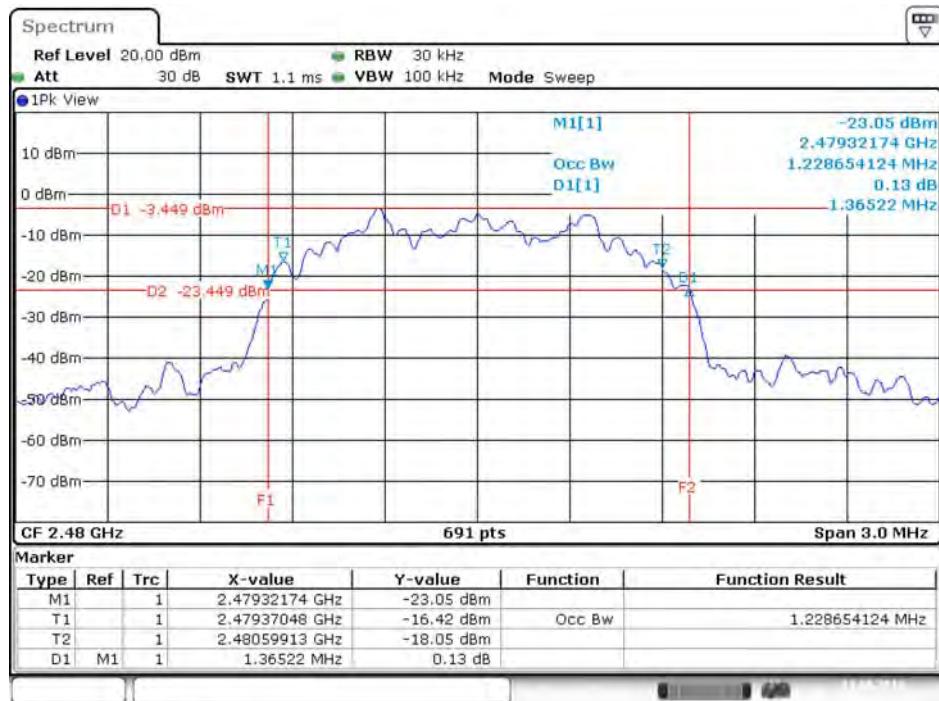
Date: 11.AUG.2016 23:38:11

**Channel Separation Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz**


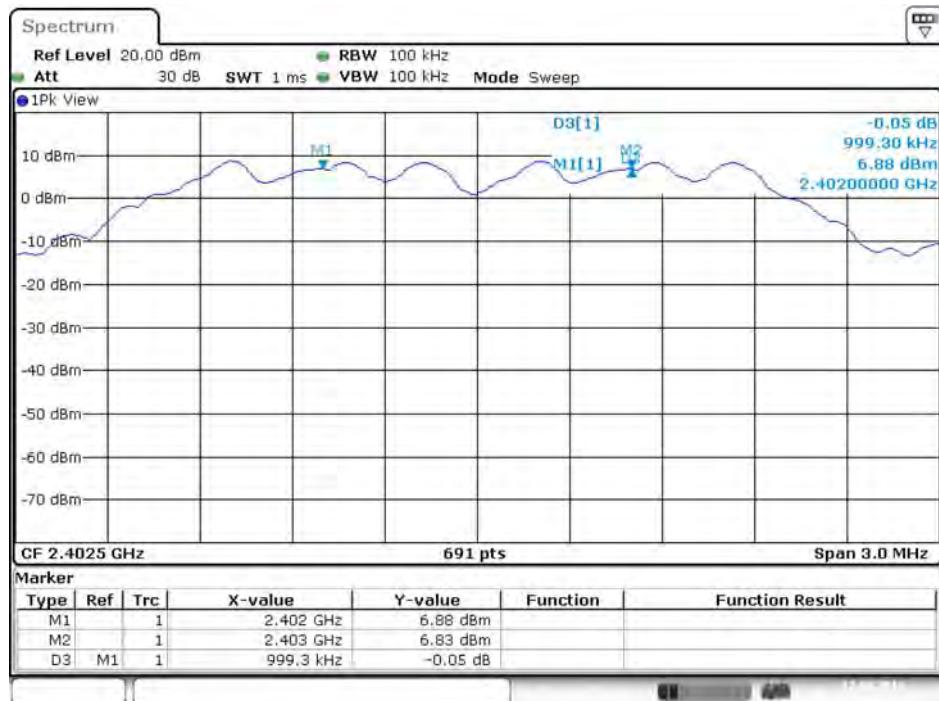
Date: 12.AUG.2016 00:01:45

**Channel Separation Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz**

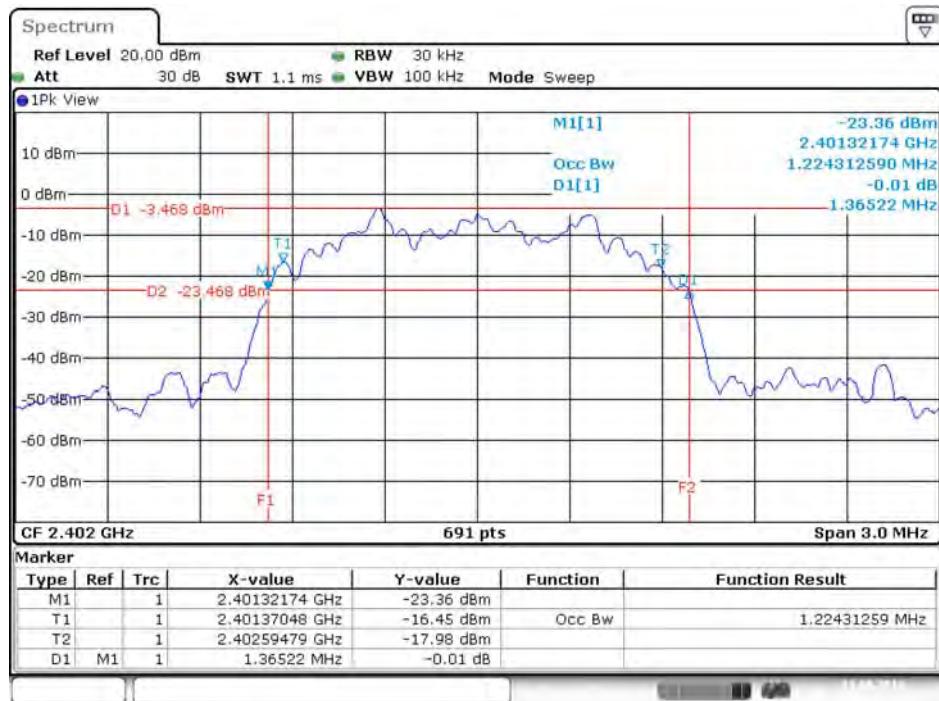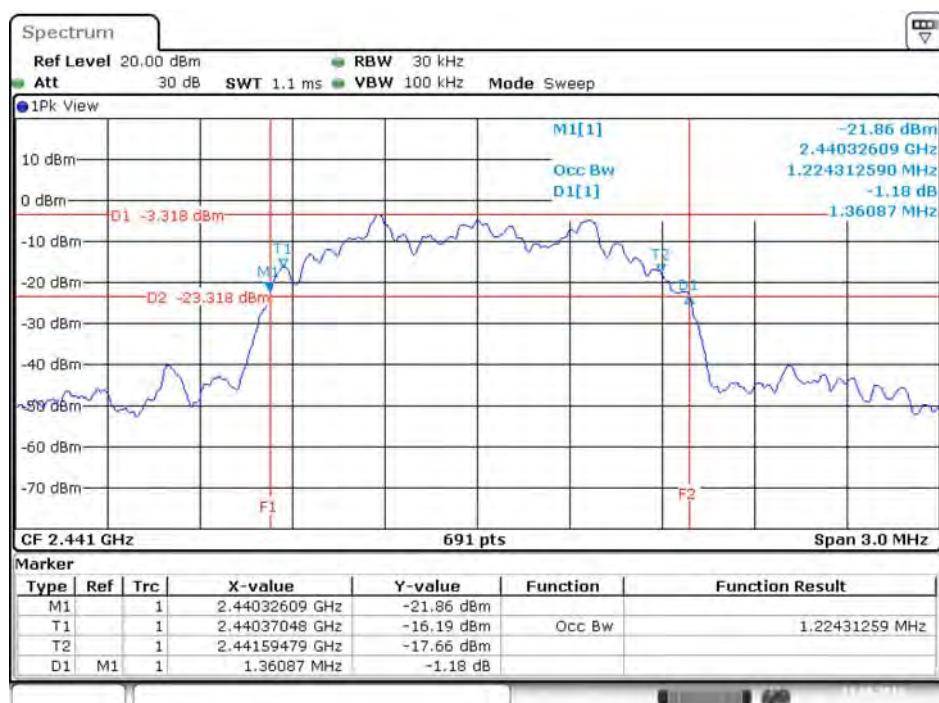**Channel Separation Plot on EDR ( $\pi/4$ -DQPSK) 2 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz**


**20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 0 / 2402 MHz**

**20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 39 / 2441 MHz**


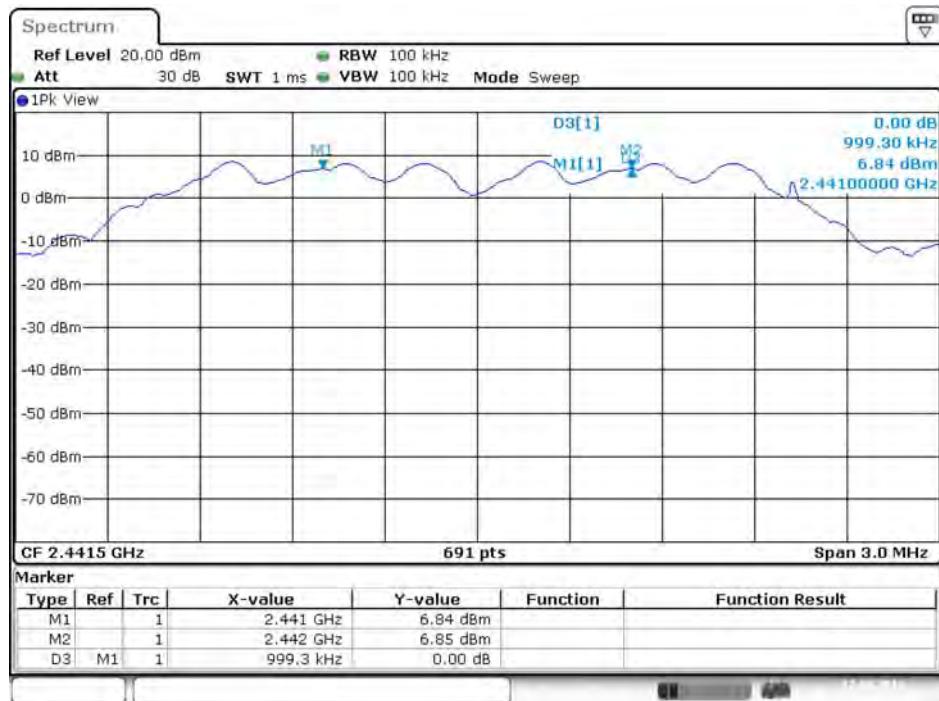
**20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 78 / 2480 MHz**


Date: 11.AUG.2016 23:39:45


**Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz**


Date: 12.AUG.2016 00:02:47

### Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz



### Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

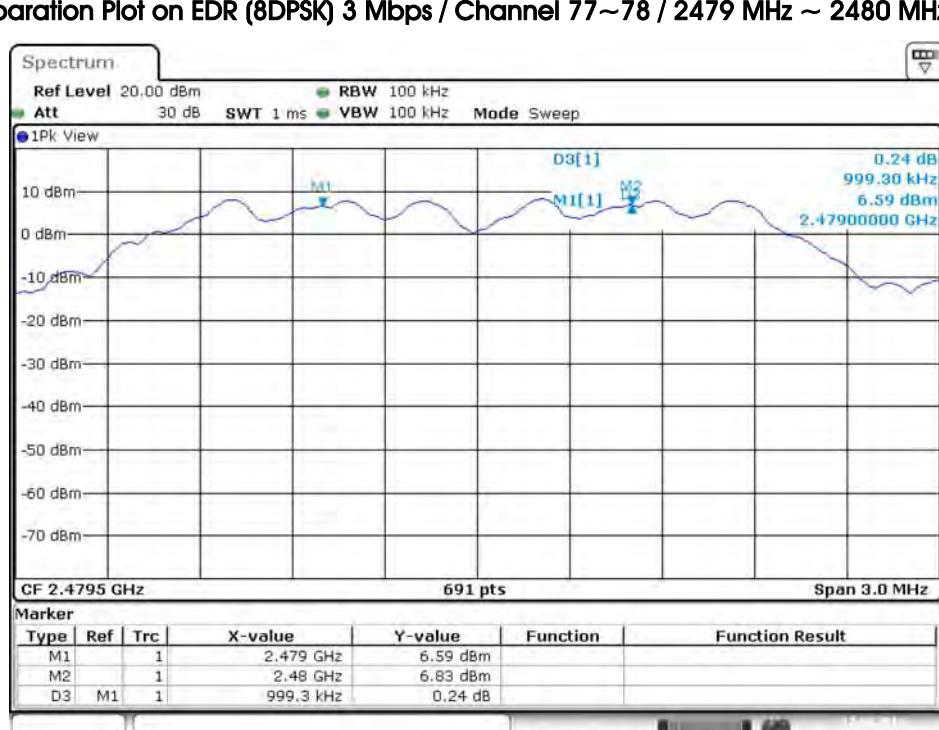

## 4.4. Number of Hopping Frequency Measurement

### 4.4.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1000 kHz and the video bandwidth of 1000 kHz were utilized.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

### 4.4.4. Test Setup Layout

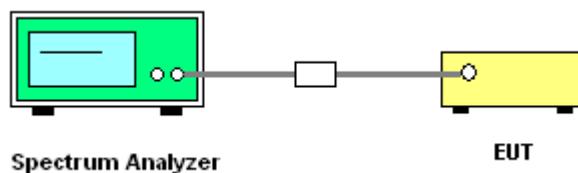

### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


#### 4.4.7. Test Result of Number of Hopping Frequency

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	EDR (8DPSK)

##### Dipole Antenna

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
EDR (8DPSK)	0 ~ 78	2402 ~ 2480MHz	79	15	Complies

##### Number of Hopping Channel Plot on EDR (8DPSK) / Channel 0~78 / 2402 MHz ~ 2480 MHz

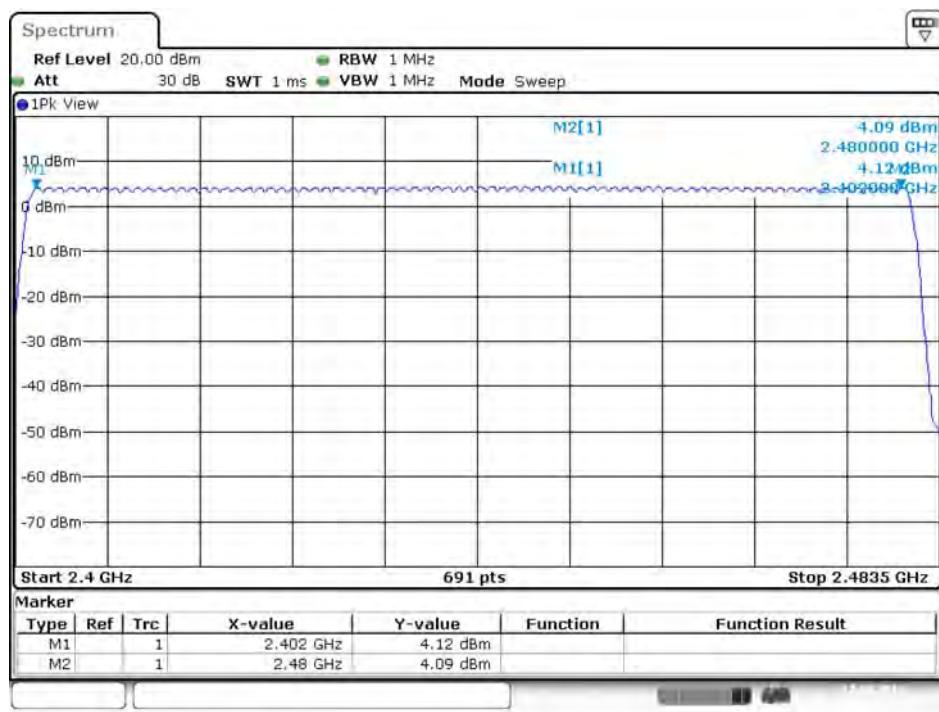

## 4.5. Dwell Time Measurement

### 4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Single Trigger

### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH1, DH3, DH5 packet transmitting.
8. Measure the maximum time duration of one single pulse.

### 4.5.4. Test Setup Layout

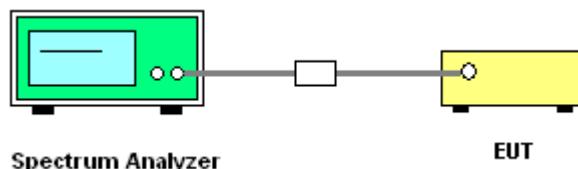

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.5.7. Test Result of Dwell Time

Temperature	20°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	BR (GFSK) / DH1, DH3, DH5

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH1	2402 MHz	0.3768	0.1206	0.4000	Complies
DH3	2402 MHz	1.6377	0.2620	0.4000	Complies
DH5	2402 MHz	2.8841	0.3076	0.4000	Complies
DH1	2441 MHz	0.3913	0.1252	0.4000	Complies
DH3	2441 MHz	1.6232	0.2597	0.4000	Complies
DH5	2441 MHz	2.8841	0.3076	0.4000	Complies
DH1	2480 MHz	0.3768	0.1206	0.4000	Complies
DH3	2480 MHz	1.6377	0.2620	0.4000	Complies
DH5	2480 MHz	2.8841	0.3076	0.4000	Complies



**Note: Pulse Duration \* Number of Pulses\*(Dwell time / measure time)**


**Remark:**

Dwell Time = 79(channels) x 0.4(s) x average hopping channel x package transfer time (us)


79 channels come from the Hopping Channel number.

Average Hopping Channel = hops / sweep time

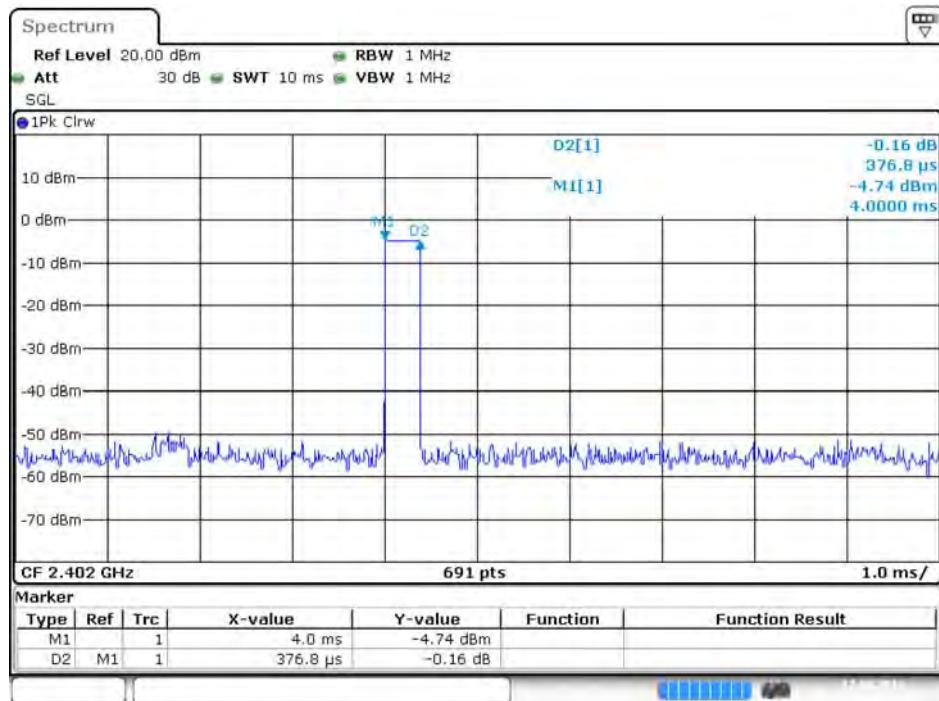
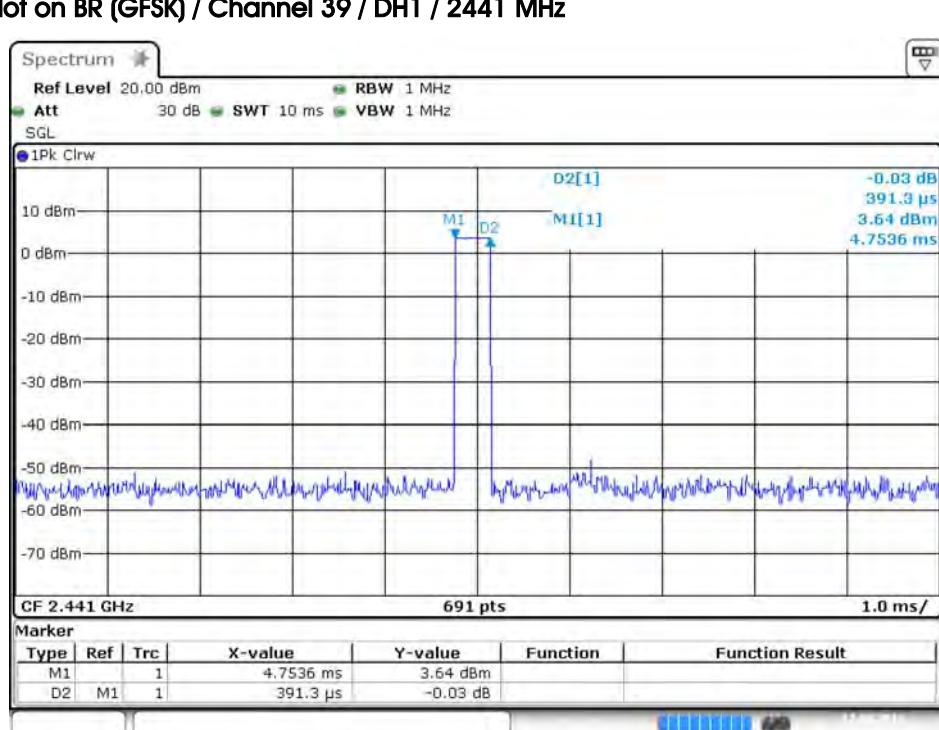
**Dwell Time Plot on BR (GFSK) / Channel 0 / DH1 / 2402 MHz**

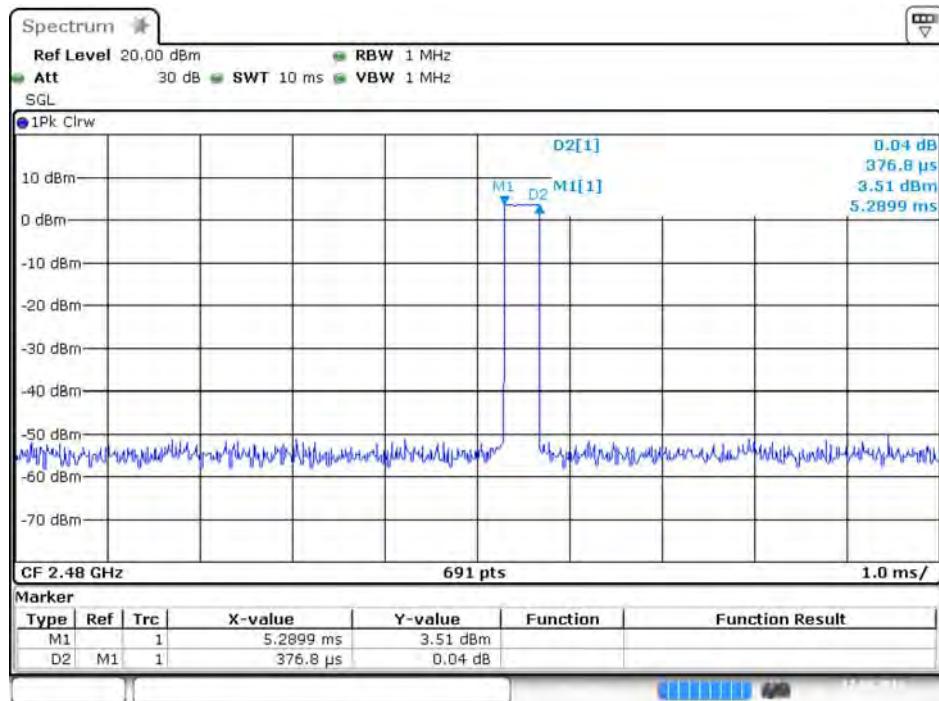**Dwell Time Plot on BR (GFSK) / Channel 39 / DH1 / 2441 MHz**


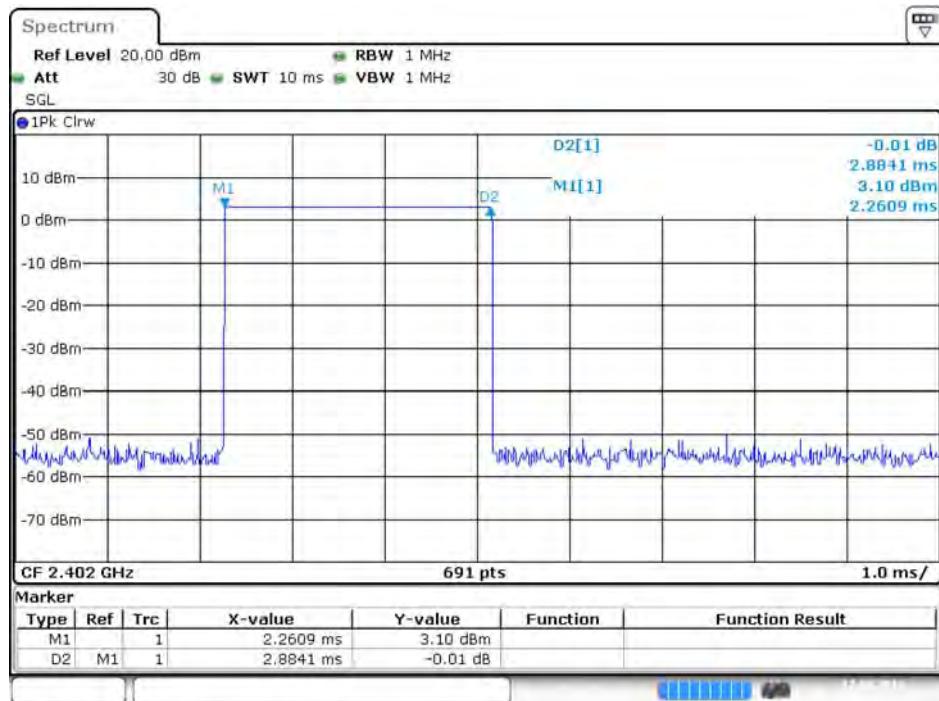
**Dwell Time Plot on BR (GFSK) / Channel 78 / DH1 / 2480 MHz**

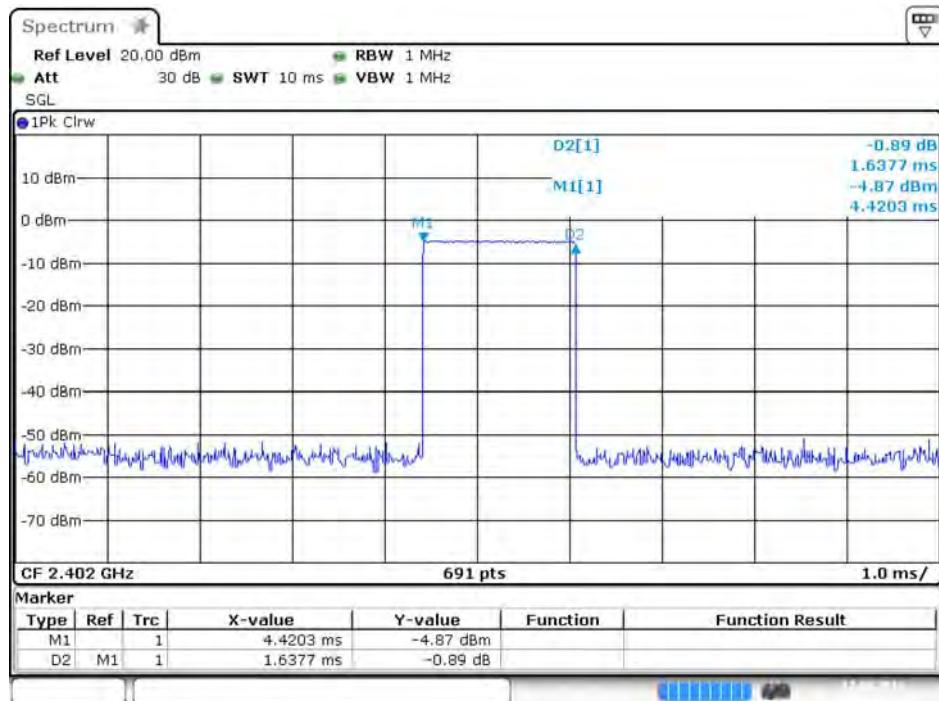
Date: 12.AUG.2016 01:03:28


**Dwell Time Plot on BR (GFSK) / Channel 0 / DH3 / 2402 MHz**

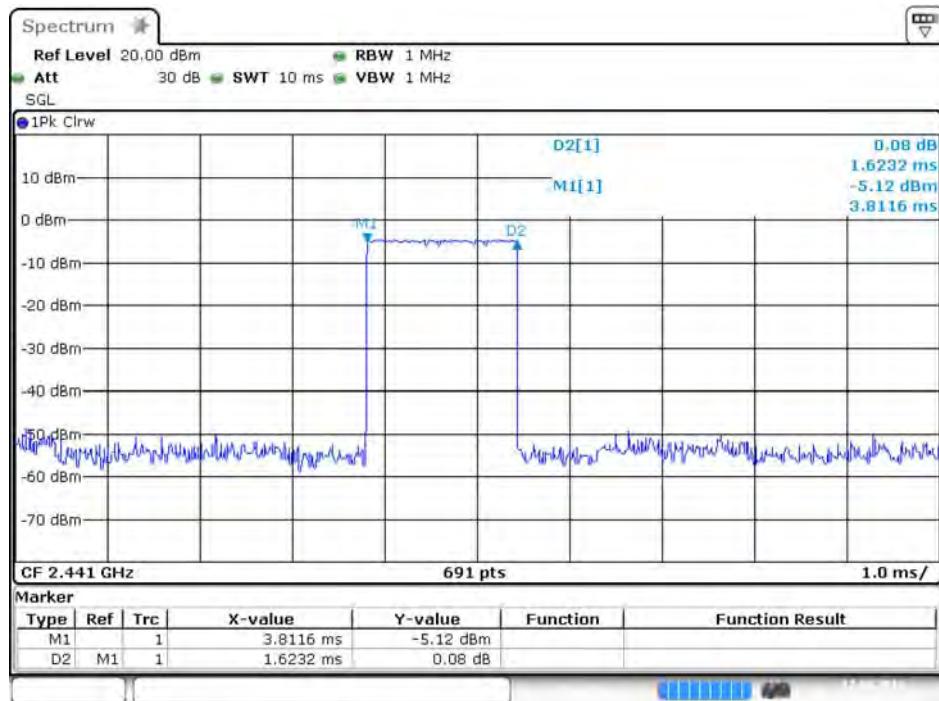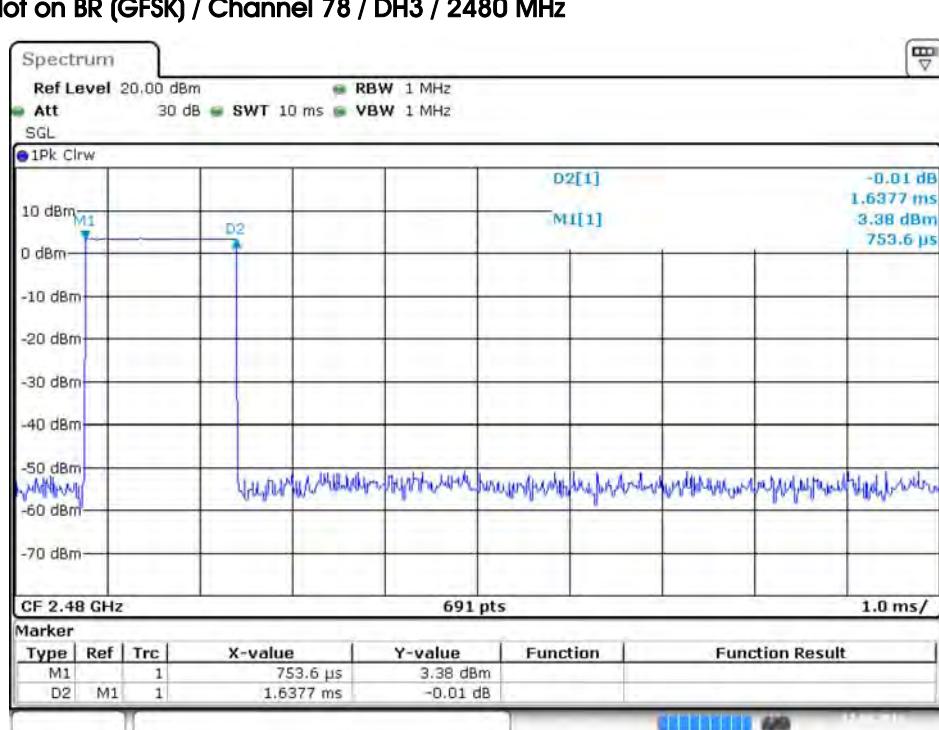
Date: 12.AUG.2016 01:08:00

**Dwell Time Plot on BR (GFSK) / Channel 39 / DH3 / 2441 MHz**

**Dwell Time Plot on BR (GFSK) / Channel 78 / DH3 / 2480 MHz**


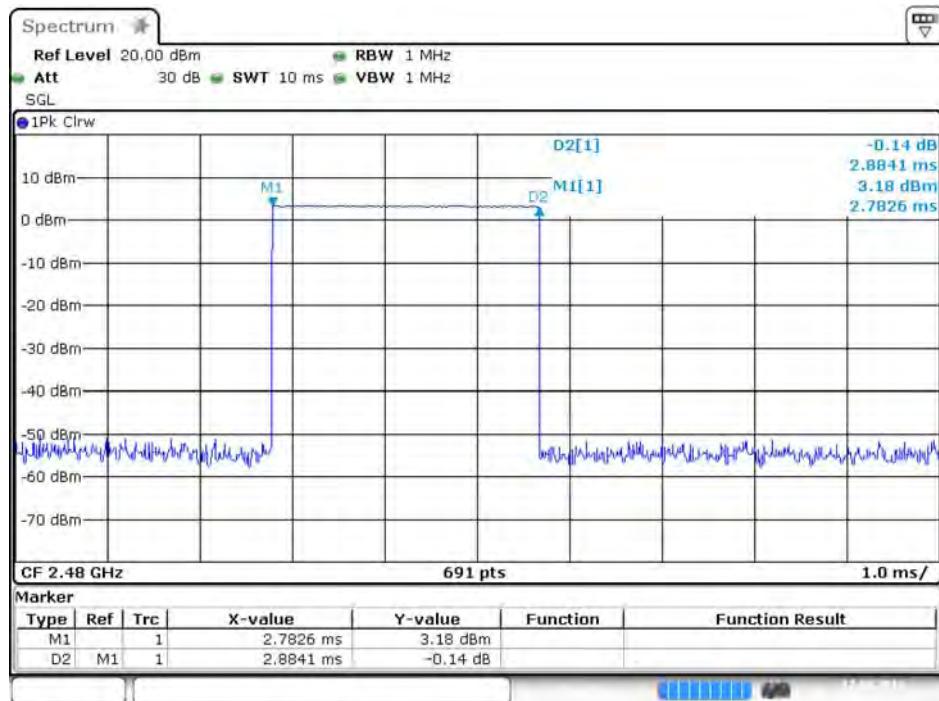
**Dwell Time Plot on BR (GFSK) / Channel 0 / DH5 / 2402 MHz**

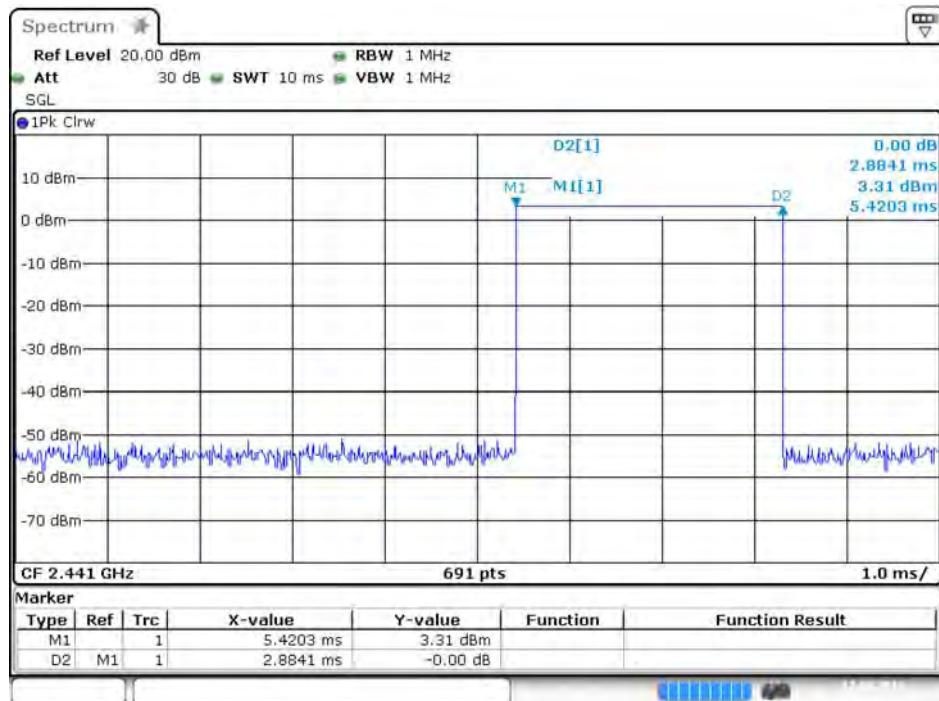
Date: 12.AUG.2016 01:10:16

**Dwell Time Plot on BR (GFSK) / Channel 39 / DH5 / 2441 MHz**


Date: 12.AUG.2016 01:11:29

**Dwell Time Plot on BR (GFSK) / Channel 78 / DH5 / 2480 MHz**



## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz, 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz, RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz, RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz, RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

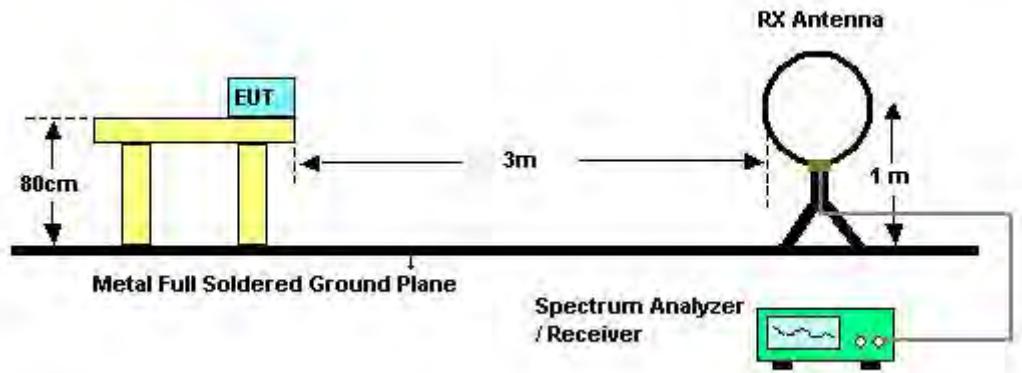

For Radiated Emissions: 30MHz~1GHz

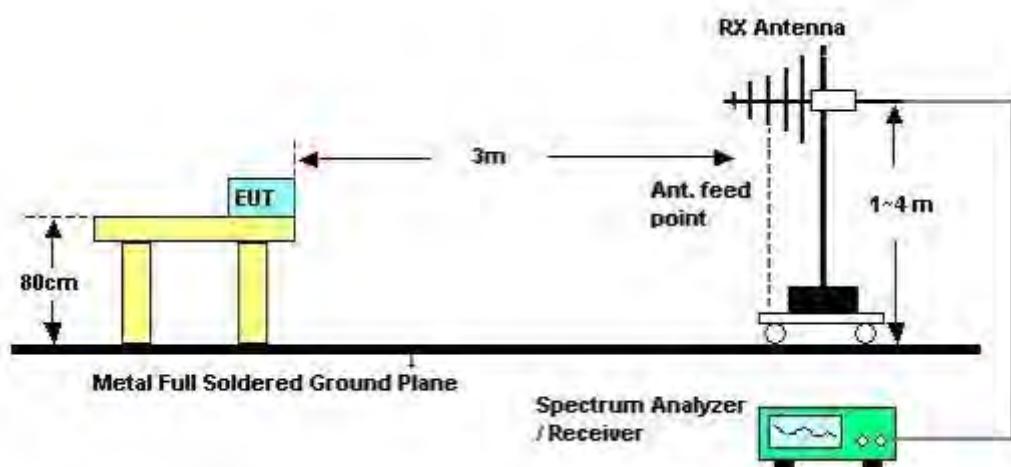

**For Radiated Emissions: Above 1GHz**

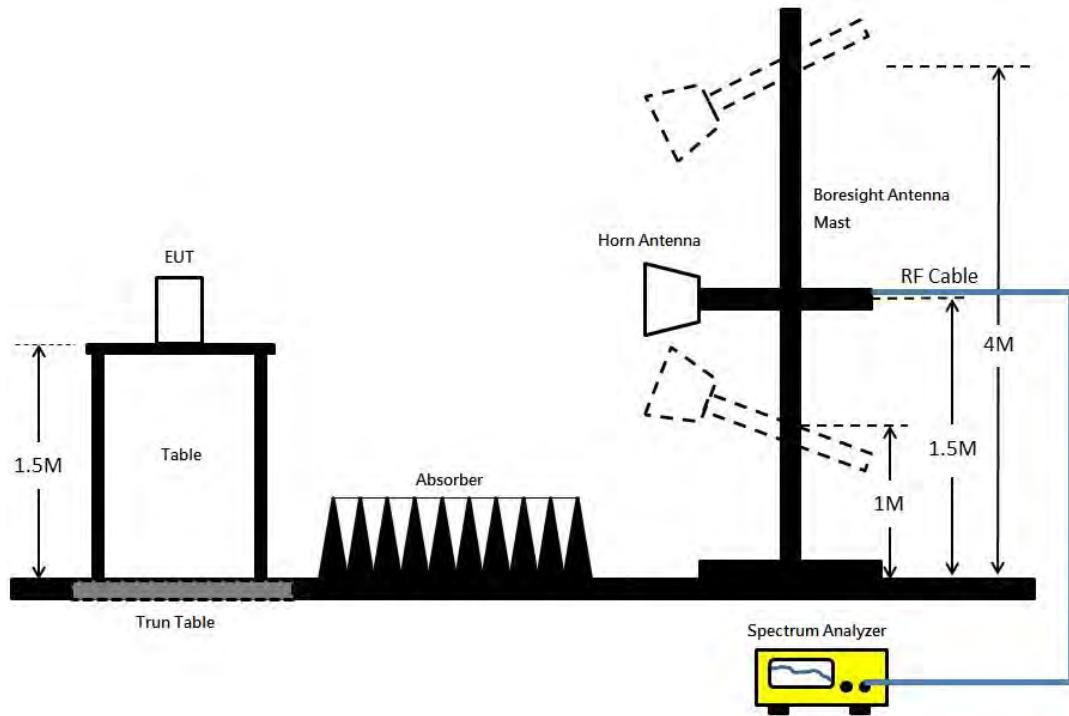

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	Normal Link / Mode 4 and Mode 5
Test Date	Jun. 21, 2016		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	Normal Link / Mode 4

##### Horizontal

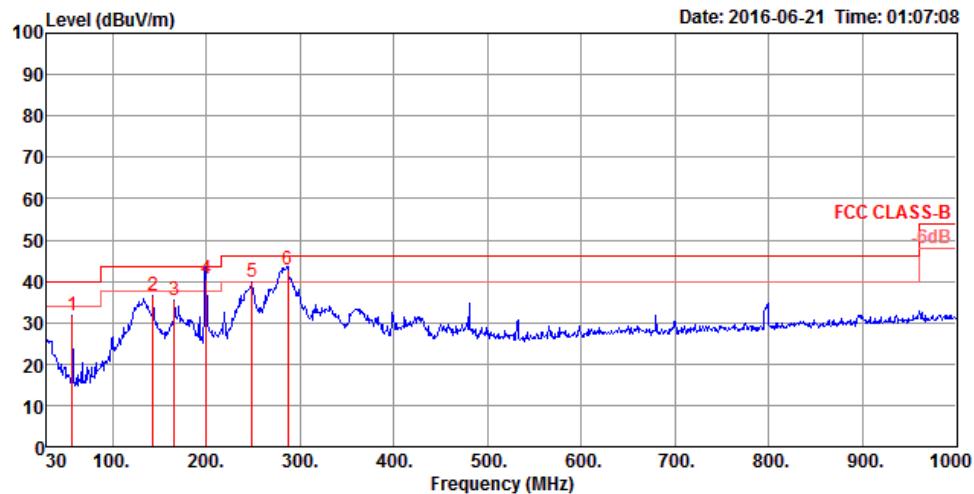


Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB									
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB/m	dB	cm	deg		
1	57.16	31.71	40.00	-8.29	49.43	0.67	14.02	32.41	150	244	Peak	HORIZONTAL
2	143.49	36.42	43.50	-7.08	49.87	1.02	17.89	32.36	200	169	Peak	HORIZONTAL
3	165.80	35.28	43.50	-8.22	49.80	1.11	16.72	32.35	200	154	Peak	HORIZONTAL
4	199.75	40.49	43.50	-3.01	54.90	1.22	16.70	32.33	150	181	QP	HORIZONTAL
5	249.22	39.72	46.00	-6.28	51.64	1.34	19.04	32.30	125	174	Peak	HORIZONTAL
6	287.05	42.96	46.00	-3.04	54.03	1.45	19.77	32.29	200	211	QP	HORIZONTAL

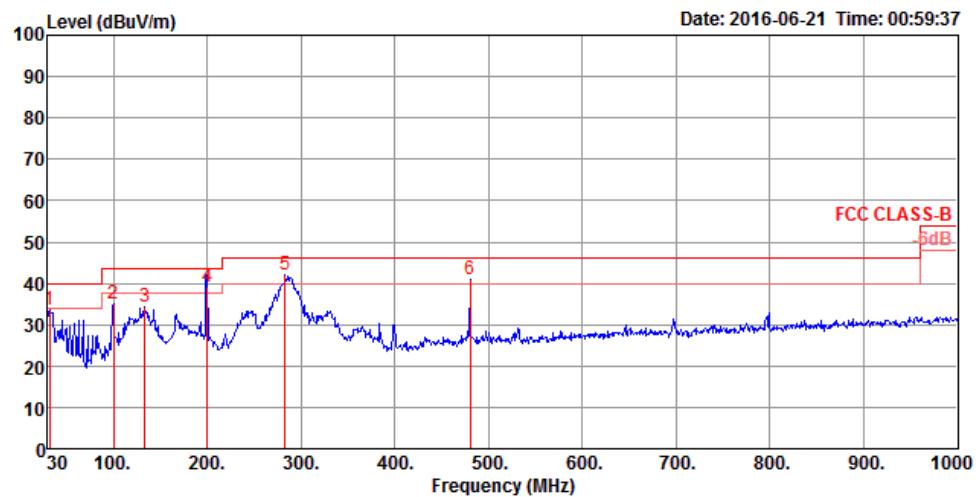
*Vertical*


Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm	deg	
1	31.94	33.54	40.00	-6.46	40.78	0.50	24.66	32.40	100	213	Peak	VERTICAL
2	99.84	35.20	43.50	-8.30	49.13	0.86	17.60	32.39	100	56	Peak	VERTICAL
3	133.79	34.15	43.50	-9.35	46.95	0.99	18.57	32.36	100	186	Peak	VERTICAL
4	199.75	39.11	43.50	-4.39	53.52	1.22	16.70	32.33	100	102	QP	VERTICAL
5	283.17	42.24	46.00	-3.76	53.37	1.43	19.73	32.29	200	155	Peak	VERTICAL
6	480.08	40.82	46.00	-5.18	47.56	1.90	23.71	32.35	100	196	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	Normal Link / Mode 5

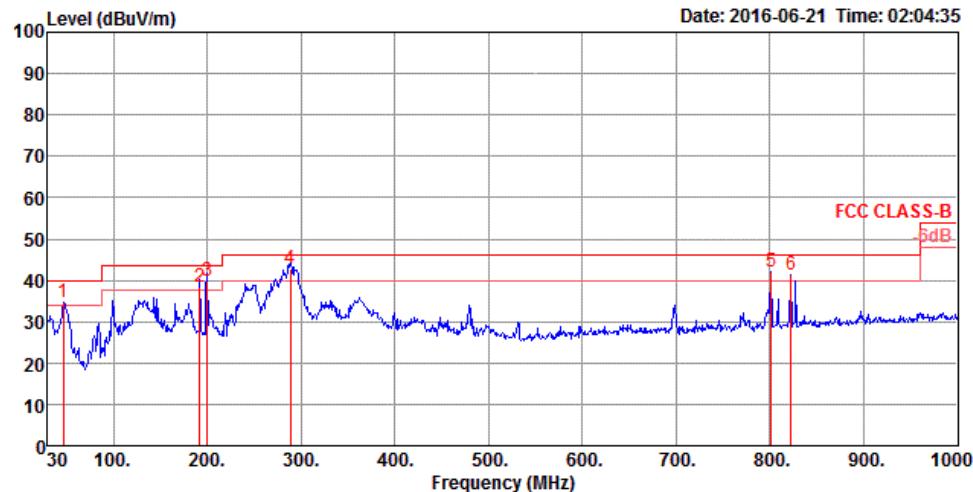**Horizontal**


Freq	Level	Limit	Over	Read	Cable			A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	46.49	34.75	40.00	-5.25	50.12	0.60	16.44	32.41	200	56 Peak	HORIZONTAL
2	191.99	38.41	43.50	-5.09	53.40	1.20	16.14	32.33	125	24 QP	HORIZONTAL
3	199.75	40.01	43.50	-3.49	54.42	1.22	16.70	32.33	200	16 QP	HORIZONTAL
4	288.99	42.78	46.00	-3.22	53.83	1.45	19.79	32.29	125	214 QP	HORIZONTAL
5	801.15	41.95	46.00	-4.05	44.90	2.46	26.83	32.24	125	67 Peak	HORIZONTAL
6	822.49	41.16	46.00	-4.84	43.72	2.49	27.07	32.12	125	101 Peak	HORIZONTAL

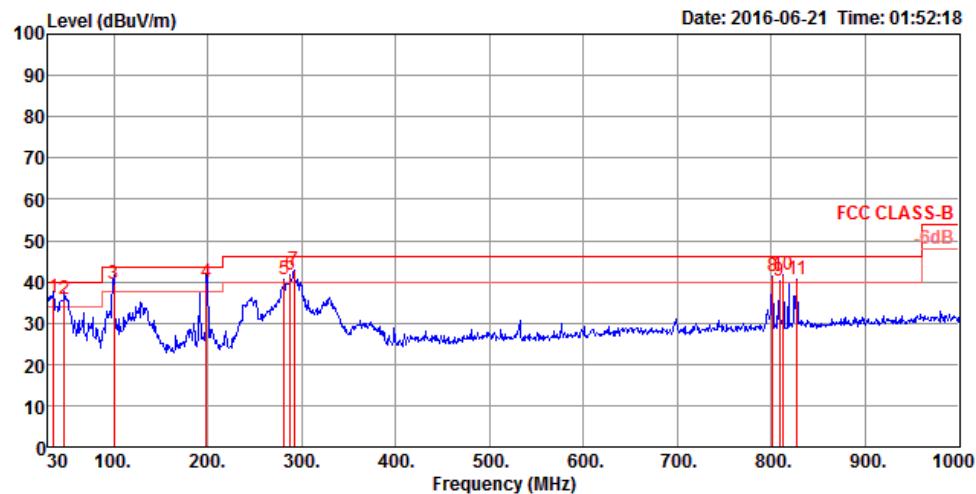**Vertical**


Freq	Limit		Over Limit	Read Level	Cable Antenna			A/Pos	T/Pos	Remark	Pol/Phase
	Level	Line			Loss	Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	35.82	36.13	40.00	-3.87	45.28	0.52	22.73	32.40	100	306 QP	VERTICAL
2	47.46	35.78	40.00	-4.22	51.58	0.61	16.00	32.41	125	185 QP	VERTICAL
3	99.84	39.45	43.50	-4.05	53.38	0.86	17.60	32.39	100	316 QP	VERTICAL
4	198.78	39.89	43.50	-3.61	54.39	1.22	16.61	32.33	200	233 QP	VERTICAL
5	281.23	40.67	46.00	-5.33	51.82	1.43	19.71	32.29	200	195 Peak	VERTICAL
6	288.02	41.72	46.00	-4.28	52.78	1.45	19.78	32.29	150	187 Peak	VERTICAL
7	291.90	42.74	46.00	-3.26	53.72	1.46	19.84	32.28	200	188 Peak	VERTICAL
8	801.15	41.25	46.00	-4.75	44.20	2.46	26.83	32.24	150	157 Peak	VERTICAL
9	808.91	40.25	46.00	-5.75	43.05	2.47	26.93	32.20	150	355 Peak	VERTICAL
10	812.79	41.69	46.00	-4.31	44.42	2.48	26.97	32.18	125	271 Peak	VERTICAL
11	827.34	40.63	46.00	-5.37	43.11	2.49	27.13	32.10	100	324 Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

##### Dipole Antenna

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	BR (GFSK) / Channel 0
Test Date	May 19, 2016 ~ Jul. 28, 2016		

##### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4803.75	22.75	54.00	-31.25	16.18	7.22	31.10	31.75	100	238	Average	HORIZONTAL
2	4803.75	47.48	74.00	-26.52	40.91	7.22	31.10	31.75	100	238	Peak	HORIZONTAL

##### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4805.50	23.51	54.00	-30.49	16.94	7.22	31.10	31.75	100	242	Average	VERTICAL
2	4805.50	48.24	74.00	-25.76	41.67	7.22	31.10	31.75	100	242	Peak	VERTICAL



Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	BR (GFSK) / Channel 39
Test Date	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

	Freq	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	Freq	Level	Line	Limit	Level	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4881.86	23.73	54.00	-30.27	17.02	7.19	31.23	31.71	100	216	Average
2	4881.86	48.46	74.00	-25.54	41.75	7.19	31.23	31.71	100	216	Peak

**Vertical**

	Freq	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	Freq	Level	Line	Limit	Level	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4884.23	23.94	54.00	-30.06	17.23	7.19	31.23	31.71	100	206	Average
2	4884.23	48.67	74.00	-25.33	41.96	7.19	31.23	31.71	100	206	Peak



Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	BR (GFSK) / Channel 78
Test Date	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4960.00	25.02	54.00	-28.98	18.18	7.17	31.34	31.67	100	202	Average	HORIZONTAL
2	4960.00	49.75	74.00	-24.25	42.91	7.17	31.34	31.67	100	202	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4960.00	24.25	54.00	-29.75	17.41	7.17	31.34	31.67	100	195	Average	VERTICAL
2	4960.00	48.98	74.00	-25.02	42.14	7.17	31.34	31.67	100	195	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	EDR (8DPSK) / Channel 0
Test Date	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4804.00	23.66	54.00	-30.34	17.09	7.22	31.10	31.75	100	225	Average
2	4804.00	48.39	74.00	-25.61	41.82	7.22	31.10	31.75	100	225	Peak
											HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4804.00	23.32	54.00	-30.68	16.75	7.22	31.10	31.75	100	234	Average
2	4804.00	48.05	74.00	-25.95	41.48	7.22	31.10	31.75	100	234	Peak
											VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	EDR (8DPSK) / Channel 39
Test Date	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			dB	cm	deg	
1	4882.00	24.94	54.00	-29.06	18.23	7.19	31.23	31.71	100	192	Average	HORIZONTAL	
2	4882.00	49.67	74.00	-24.33	42.96	7.19	31.23	31.71	100	192	Peak	HORIZONTAL	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			dB	cm	deg	
1	4882.00	24.41	54.00	-29.59	17.70	7.19	31.23	31.71	100	185	Average	VERTICAL	
2	4882.00	49.14	74.00	-24.86	42.43	7.19	31.23	31.71	100	185	Peak	VERTICAL	



Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	EDR (8DPSK) / Channel 78
Test Date	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dB	dB			cm	deg		
1	4960.00	24.01	54.00	-29.99	17.17	7.17	31.34	31.67	100	197	Average	HORIZONTAL	
2	4960.00	48.74	74.00	-25.26	41.90	7.17	31.34	31.67	100	197	Peak	HORIZONTAL	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dB	dB			cm	deg		
1	4960.00	23.87	54.00	-30.13	17.03	7.17	31.34	31.67	100	171	Average	VERTICAL	
2	4960.00	48.60	74.00	-25.40	41.76	7.17	31.34	31.67	100	171	Peak	VERTICAL	

**PIFA Antenna**

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Gino Huang	<b>Configurations</b>	BR (GFSK) / Channel 0
<b>Test Date</b>	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

	Freq	Limit		Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Level	Line									
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg	
1	4804.01	24.96	54.00	-29.04	19.29	6.32	31.10	31.75	287	358	Average	HORIZONTAL
2	4804.01	49.69	74.00	-24.31	44.02	6.32	31.10	31.75	287	358	Peak	HORIZONTAL

**Vertical**

	Freq	Limit		Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Level	Line									
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg	
1	4803.80	24.19	54.00	-29.81	18.52	6.32	31.10	31.75	134	4	Average	VERTICAL
2	4803.80	48.92	74.00	-25.08	43.25	6.32	31.10	31.75	134	4	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	BR (GFSK) / Channel 39
Test Date	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

	Freq	Limit		Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Level	Line			Loss	Factor						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4882.21	25.33	54.00	-28.67	19.46	6.35	31.23	31.71	265	0	Average	HORIZONTAL	
2	4882.21	50.06	74.00	-23.94	44.19	6.35	31.23	31.71	265	0	Peak	HORIZONTAL	

**Vertical**

	Freq	Limit		Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Level	Line			Loss	Factor						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4881.61	23.68	54.00	-30.32	17.81	6.35	31.23	31.71	270	324	Average	VERTICAL	
2	4881.61	48.41	74.00	-25.59	42.54	6.35	31.23	31.71	270	324	Peak	VERTICAL	

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	BR (GFSK) / Channel 78
Test Date	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	4960.05	24.79	54.00	-29.21	18.74	6.38	31.34	31.67	300	310	Average	HORIZONTAL
2	4960.05	49.52	74.00	-24.48	43.47	6.38	31.34	31.67	300	310	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	4959.32	22.16	54.00	-31.84	16.11	6.38	31.34	31.67	199	360	Average	VERTICAL
2	4959.32	46.89	74.00	-27.11	40.84	6.38	31.34	31.67	199	360	Peak	VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	EDR (8DPSK) / Channel 0
Test Date	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	4804.20	24.72	54.00	-29.28	18.15	7.22	31.10	31.75	267	358	Average	HORIZONTAL
2	4804.20	49.45	74.00	-24.55	42.88	7.22	31.10	31.75	267	358	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	4803.09	23.76	54.00	-30.24	17.19	7.22	31.10	31.75	150	7	Average	VERTICAL
2	4803.09	48.49	74.00	-25.51	41.92	7.22	31.10	31.75	150	7	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Gino Huang	<b>Configurations</b>	EDR (8DPSK) / Channel 39
<b>Test Date</b>	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

	Freq	Limit		Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Level	Line			Loss	Factor						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4882.11	25.40	54.00	-28.60	19.53	6.35	31.23	31.71	236	314	Average	HORIZONTAL	
2	4882.11	50.13	74.00	-23.87	44.26	6.35	31.23	31.71	236	314	Peak	HORIZONTAL	

**Vertical**

	Freq	Limit		Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Level	Line			Loss	Factor						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4882.29	24.54	54.00	-29.46	18.67	6.35	31.23	31.71	198	5	Average	VERTICAL	
2	4882.29	49.27	74.00	-24.73	43.40	6.35	31.23	31.71	198	5	Peak	VERTICAL	

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	EDR (8DPSK) / Channel 78
Test Date	May 19, 2016 ~ Jul. 28, 2016		

**Horizontal**

Freq	Level	Limit		Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Over								
		MHz	dBuV/m								
1	4960.49	24.99	54.00	-29.01	18.94	6.38	31.34	31.67	230	356	Average
2	4960.49	49.72	74.00	-24.28	43.67	6.38	31.34	31.67	230	356	Peak

**Vertical**

Freq	Level	Limit		Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Over								
		MHz	dBuV/m								
1	4959.85	23.01	54.00	-30.99	16.96	6.38	31.34	31.67	185	185	Average
2	4959.85	47.74	74.00	-26.26	41.69	6.38	31.34	31.67	185	185	Peak

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Emissions Measurement

### 4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (20dBc in any 100 kHz bandwidth emission)	100 kHz /100 kHz for Peak

### 4.7.3. Test Procedures

#### For Radiated band edges Measurement:

The test procedure is the same as section 4.6.3.

#### For Radiated Out of Band Emission Measurement:

The test procedure is follow 15.247(d).

#### **4.7.4. Test Setup Layout**

##### For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.6.4.

##### For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.6.4.

#### **4.7.5. Test Deviation**

There is no deviation with the original standard.

#### **4.7.6. EUT Operation during Test**


The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

##### Dipole Antenna


Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	BR (GFSK) / Channel 0, 39, 78

##### Channel 0

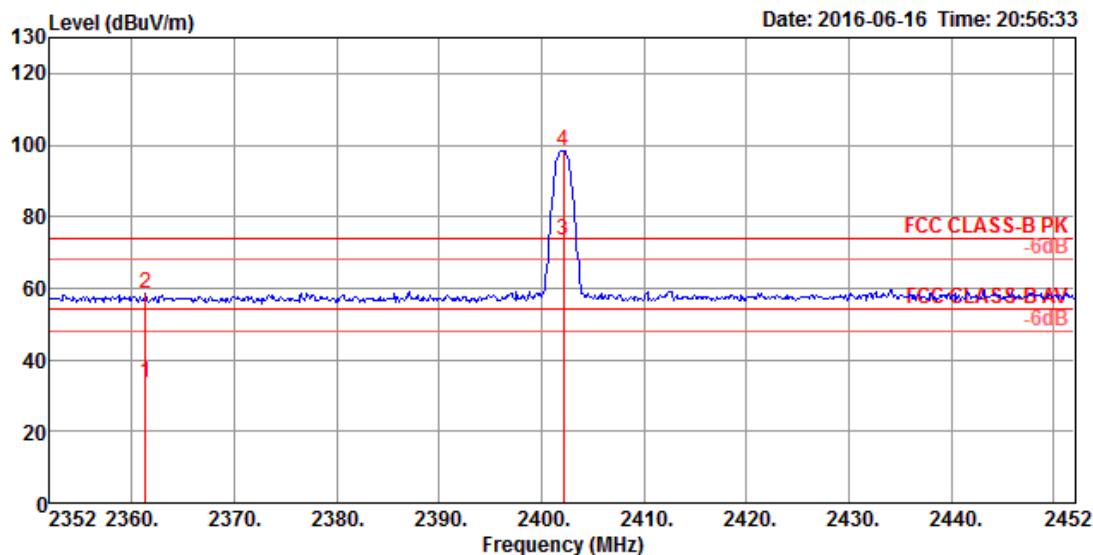


Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			dB	cm	deg	
MHz	dBuV/m	dBuV/m	dB										
1	2361.33	33.78	54.00	-20.22	2.49	4.30	26.99	0.00	100	317	Average	VERTICAL	
2	2361.33	58.51	74.00	-15.49	27.22	4.30	26.99	0.00	100	317	Peak	VERTICAL	
3	2402.14	73.48			42.06	4.34	27.08	0.00	100	317	Average	VERTICAL	
4	2402.14	98.21			66.79	4.34	27.08	0.00	100	317	Peak	VERTICAL	

Item 3, 4 are the fundamental frequency at 2402 MHz.

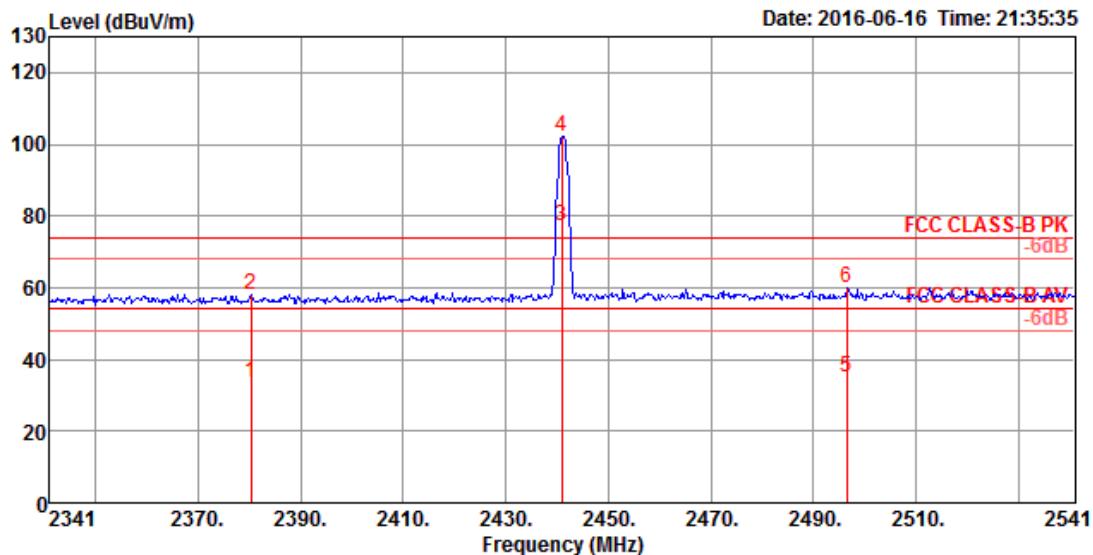**Channel 39**


Freq	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	Level	Line			Loss	dB	dBuV	dB	dB	cm	deg	
	MHz	dBuV/m	dBuV/m		dB							
1	2380.22	33.51	54.00	-20.49	2.15	4.32	27.04	0.00	100	14	Average	VERTICAL
2	2380.22	58.24	74.00	-15.76	26.88	4.32	27.04	0.00	100	14	Peak	VERTICAL
3	2441.00	77.34			45.78	4.38	27.18	0.00	100	14	Average	VERTICAL
4	2441.00	102.07			70.51	4.38	27.18	0.00	100	14	Peak	VERTICAL
5	2496.52	35.03	54.00	-18.97	3.29	4.44	27.30	0.00	100	14	Average	VERTICAL
6	2496.52	59.76	74.00	-14.24	28.02	4.44	27.30	0.00	100	14	Peak	VERTICAL


Item 3, 4 are the fundamental frequency at 2441 MHz.

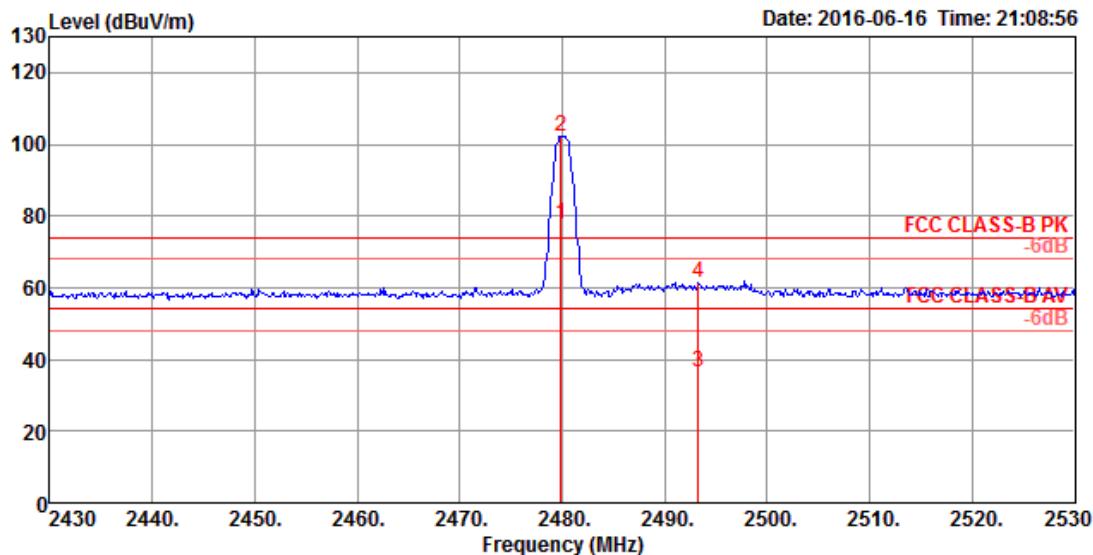**Channel 78**


Freq	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	Level	Line			Loss	dB/m						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2479.86	77.58			45.92	4.41	27.25	0.00	100	279	Average	VERTICAL
2	2479.86	102.31			70.65	4.41	27.25	0.00	100	279	Peak	VERTICAL
3	2493.31	36.49	54.00	-17.51	4.78	4.43	27.28	0.00	100	279	Average	VERTICAL
4	2493.31	61.22	74.00	-12.78	29.51	4.43	27.28	0.00	100	279	Peak	VERTICAL


Item 1, 2 are the fundamental frequency at 2480 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Gino Huang	<b>Configurations</b>	EDR (8DPSK) / Channel 0, 39, 78

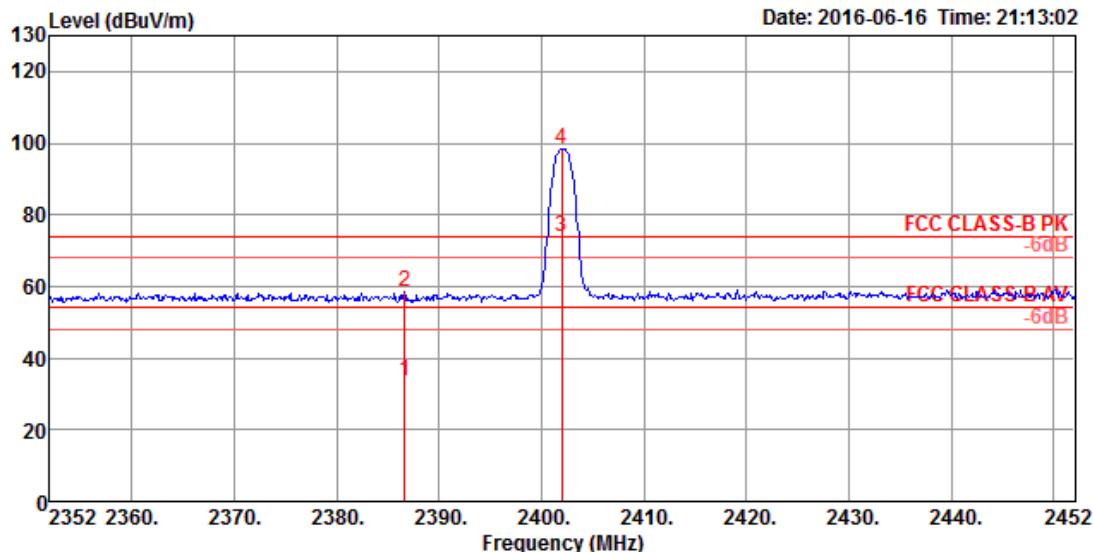**Channel 0**


Freq	Level	Limit Line	Over Limit	Read Level	Cable			Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
					Loss	Factor	Factor						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	2386.66	33.77	54.00	-20.23	2.39	4.33	27.05	0.00	100	10	Average	VERTICAL	
2	2386.66	58.50	74.00	-15.50	27.12	4.33	27.05	0.00	100	10	Peak	VERTICAL	
3	2402.00	73.81			42.39	4.34	27.08	0.00	100	10	Average	VERTICAL	
4	2402.00	98.54			67.12	4.34	27.08	0.00	100	10	Peak	VERTICAL	


Item 3, 4 are the fundamental frequency at 2402 MHz.

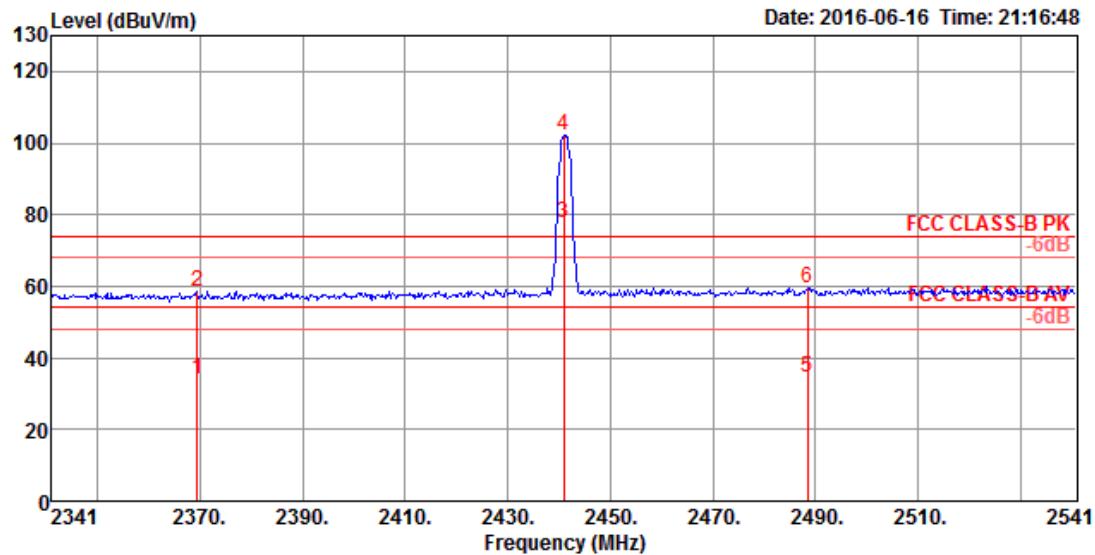**Channel 39**


Freq	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	Level	Line			dB	dBuV						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	2369.45	33.91	54.00	-20.09	2.60	4.31	27.00	0.00	100	11	Average	VERTICAL
2	2369.45	58.64	74.00	-15.36	27.33	4.31	27.00	0.00	100	11	Peak	VERTICAL
3	2441.00	77.58			46.02	4.38	27.18	0.00	100	11	Average	VERTICAL
4	2441.00	102.31			70.75	4.38	27.18	0.00	100	11	Peak	VERTICAL
5	2488.42	34.57	54.00	-19.43	2.88	4.42	27.27	0.00	100	11	Average	VERTICAL
6	2488.42	59.30	74.00	-14.70	27.61	4.42	27.27	0.00	100	11	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

## Channel 78

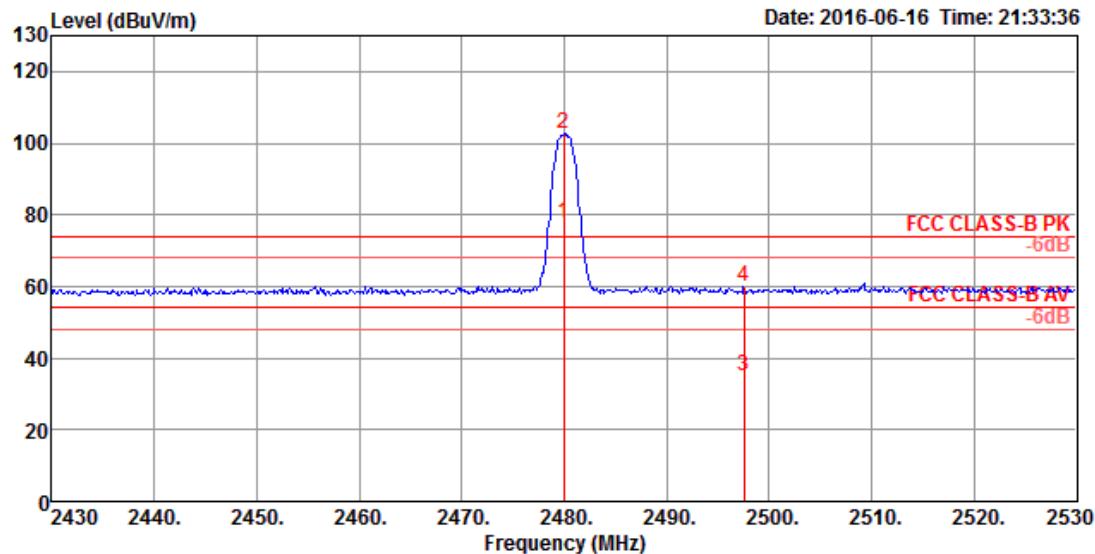


Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit	Level						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	2480.00	77.79			46.13	4.41	27.25	0.00	100	308	Average	VERTICAL	
2	2480.00	102.52			70.86	4.41	27.25	0.00	100	308	Peak	VERTICAL	
3	2497.51	35.22	54.00	-18.78	3.48	4.44	27.30	0.00	100	308	Average	VERTICAL	
4	2497.51	59.95	74.00	-14.05	28.21	4.44	27.30	0.00	100	308	Peak	VERTICAL	

Item 1, 2 are the fundamental frequency at 2480 MHz.

## PIFA Antenna


Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	BR (GFSK) / Channel 0, 39, 78

## Channel 0

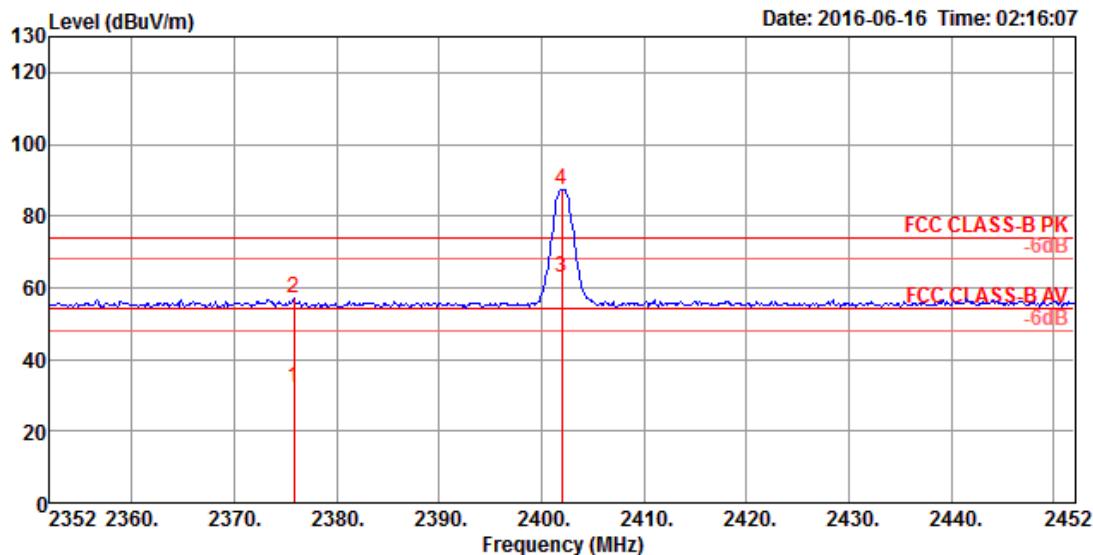


Freq	Limit		Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	Level	Line			Loss	Factor						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	2375.80	32.23	54.00	-21.77	0.90	4.31	27.02	0.00	148	56	Average	VERTICAL
2	2375.80	56.96	74.00	-17.04	25.63	4.31	27.02	0.00	148	56	Peak	VERTICAL
3	2402.00	62.66			31.24	4.34	27.08	0.00	148	56	Average	VERTICAL
4	2402.00	87.39			55.97	4.34	27.08	0.00	148	56	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

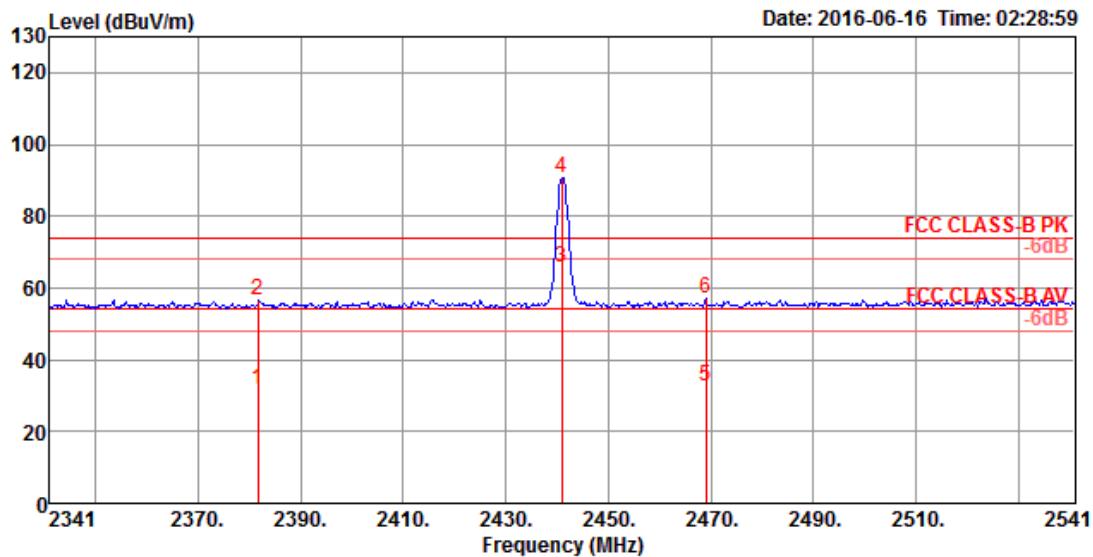**Channel 39**


Freq	Level	Limit Line	Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
					Loss	Factor	Factor						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg				
1	2381.60	31.70	54.00	-22.30	0.34	4.32	27.04	0.00	291	198	Average	VERTICAL	
2	2381.60	56.43	74.00	-17.57	25.07	4.32	27.04	0.00	291	198	Peak	VERTICAL	
3	2441.00	65.73			34.17	4.38	27.18	0.00	291	198	Average	VERTICAL	
4	2441.00	90.46			58.90	4.38	27.18	0.00	291	198	Peak	VERTICAL	
5	2469.00	32.47	54.00	-21.53	0.82	4.41	27.24	0.00	291	198	Average	VERTICAL	
6	2469.00	57.20	74.00	-16.80	25.55	4.41	27.24	0.00	291	198	Peak	VERTICAL	


Item 3, 4 are the fundamental frequency at 2441 MHz.

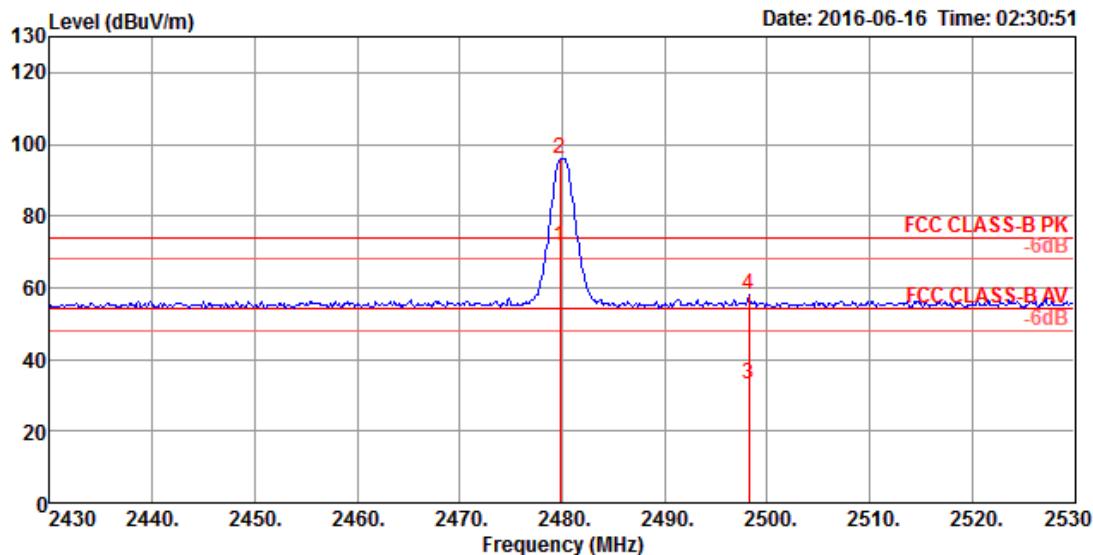**Channel 78**


Freq	Level	Limit	Over	Read	Cable			Preamp	A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	2479.80	71.27			39.61	4.41	27.25	0.00	300	184	Average	HORIZONTAL
2	2479.80	96.00			64.34	4.41	27.25	0.00	300	184	Peak	HORIZONTAL
3	2498.20	33.21	54.00	-20.79	1.47	4.44	27.30	0.00	300	184	Average	HORIZONTAL
4	2498.20	57.94	74.00	-16.06	26.20	4.44	27.30	0.00	300	184	Peak	HORIZONTAL


Item 1, 2 are the fundamental frequency at 2480 MHz.

Temperature	22°C	Humidity	54%
Test Engineer	Gino Huang	Configurations	EDR (8DPSK) / Channel 0, 39, 78

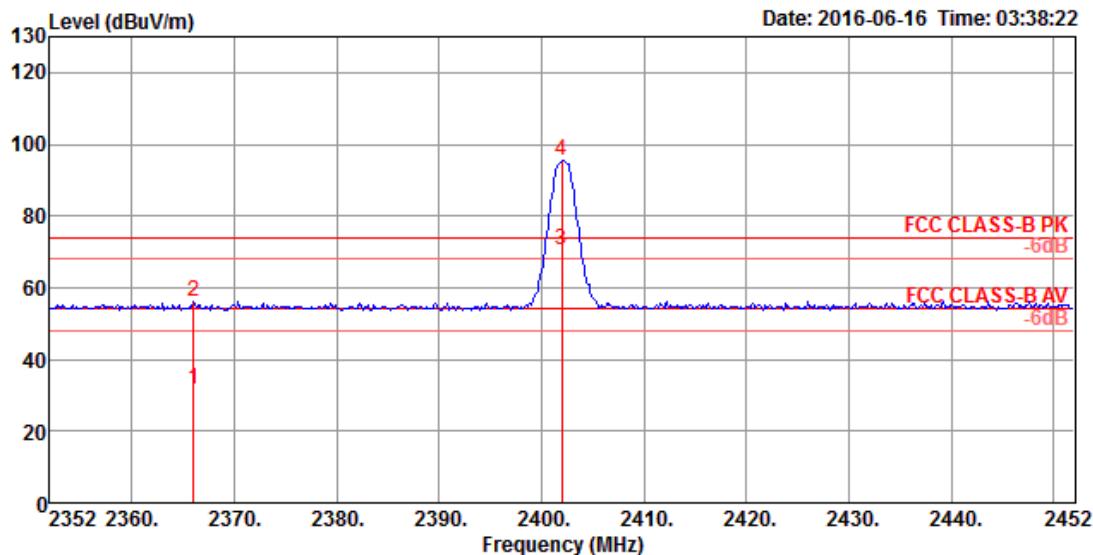**Channel 0**


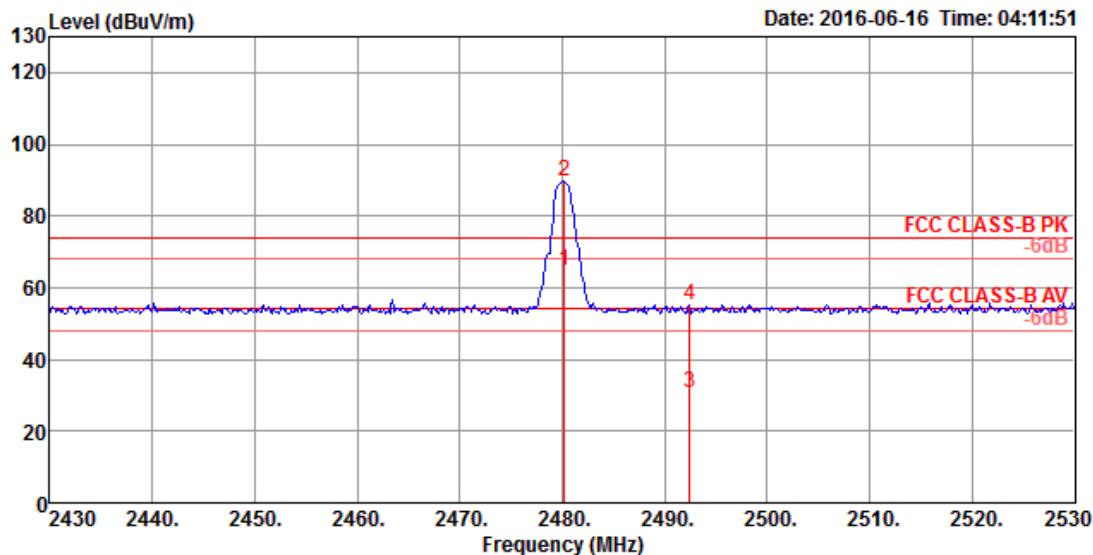
Freq	Limit		Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	Level	Line			Loss	Factor						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	2366.00	31.63	54.00	-22.37	0.32	4.31	27.00	0.00	114	186	Average	HORIZONTAL
2	2366.00	56.36	74.00	-17.64	25.05	4.31	27.00	0.00	114	186	Peak	HORIZONTAL
3	2402.00	70.57			39.15	4.34	27.08	0.00	114	186	Average	HORIZONTAL
4	2402.00	95.30			63.88	4.34	27.08	0.00	114	186	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

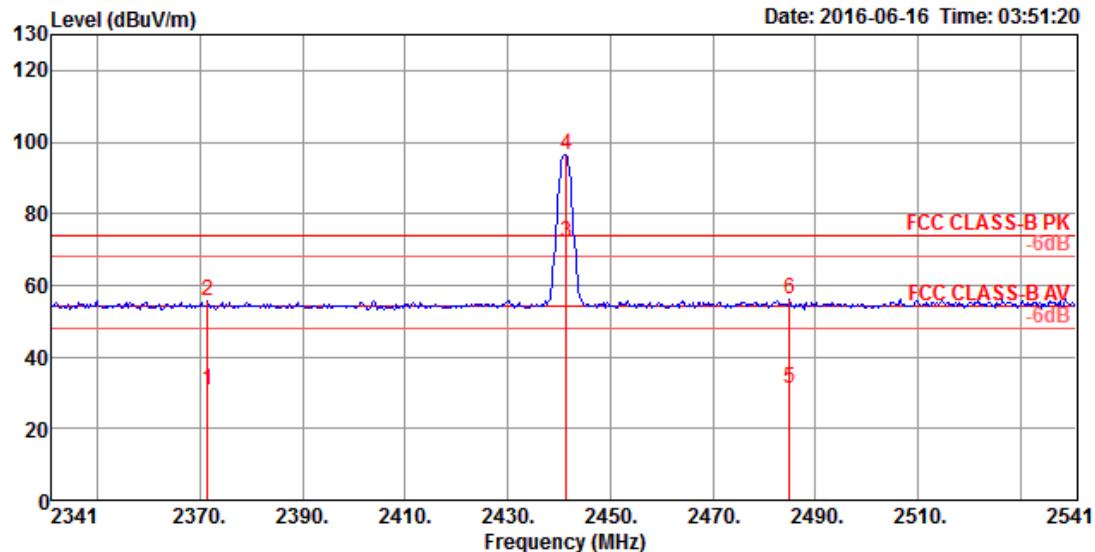**Channel 39**


Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2371.40	30.79	54.00	-23.21	-0.54	4.31	27.02	0.00	285	188 Average	HORIZONTAL
2	2371.40	55.52	74.00	-18.48	24.19	4.31	27.02	0.00	285	188 Peak	HORIZONTAL
3	2441.40	71.76			40.20	4.38	27.18	0.00	285	188 Average	HORIZONTAL
4	2441.40	96.49			64.93	4.38	27.18	0.00	285	188 Peak	HORIZONTAL
5	2485.00	31.25	54.00	-22.75	-0.44	4.42	27.27	0.00	285	188 Average	HORIZONTAL
6	2485.00	55.98	74.00	-18.02	24.29	4.42	27.27	0.00	285	188 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

**Channel 78**


Freq	Level	Limit	Over	Read	Cable			Preamp	A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	2480.20	64.82			33.16	4.41	27.25	0.00	288	282	Average	VERTICAL
2	2480.20	89.55			57.89	4.41	27.25	0.00	288	282	Peak	VERTICAL
3	2492.40	30.53	54.00	-23.47	-1.18	4.43	27.28	0.00	288	282	Average	VERTICAL
4	2492.40	55.26	74.00	-18.74	23.55	4.43	27.28	0.00	288	282	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


### Dipole Antenna

#### Plot on Configuration For BR (GFSK) / Channel 0 / Reference Level

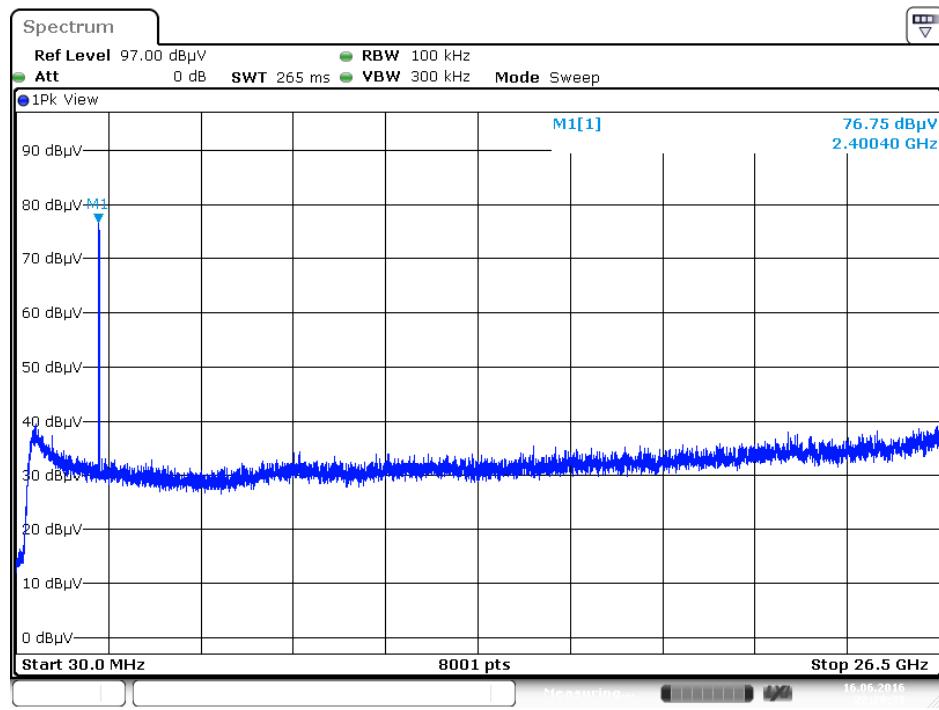


Date: 16 JUN 2016 22:20:31

#### Plot on Configuration For BR (GFSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

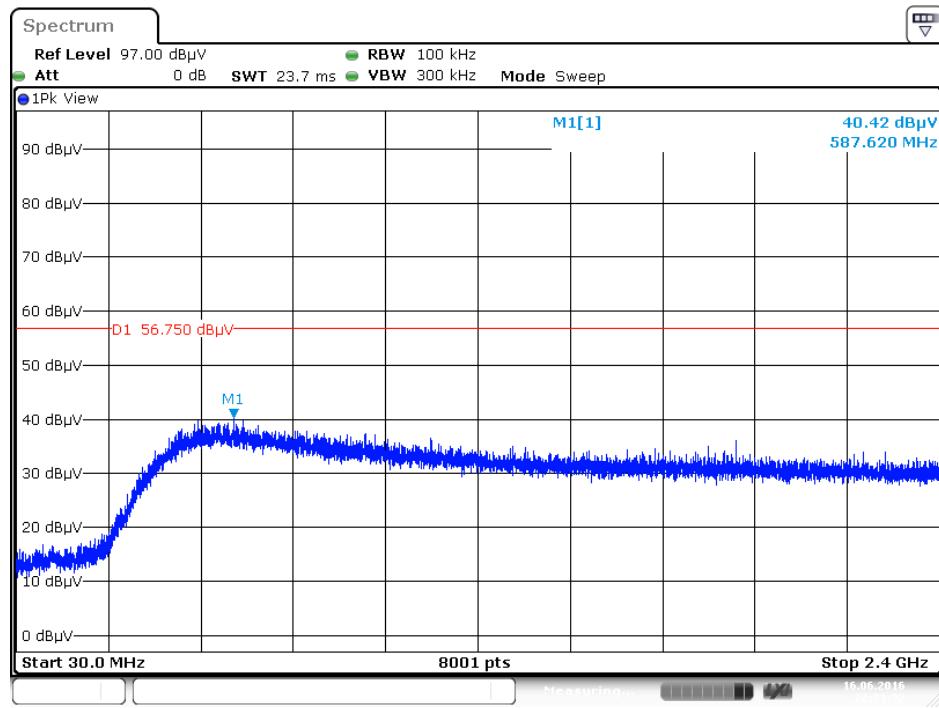


Date: 16 JUN 2016 22:21:32


### Plot on Configuration For BR (GFSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)

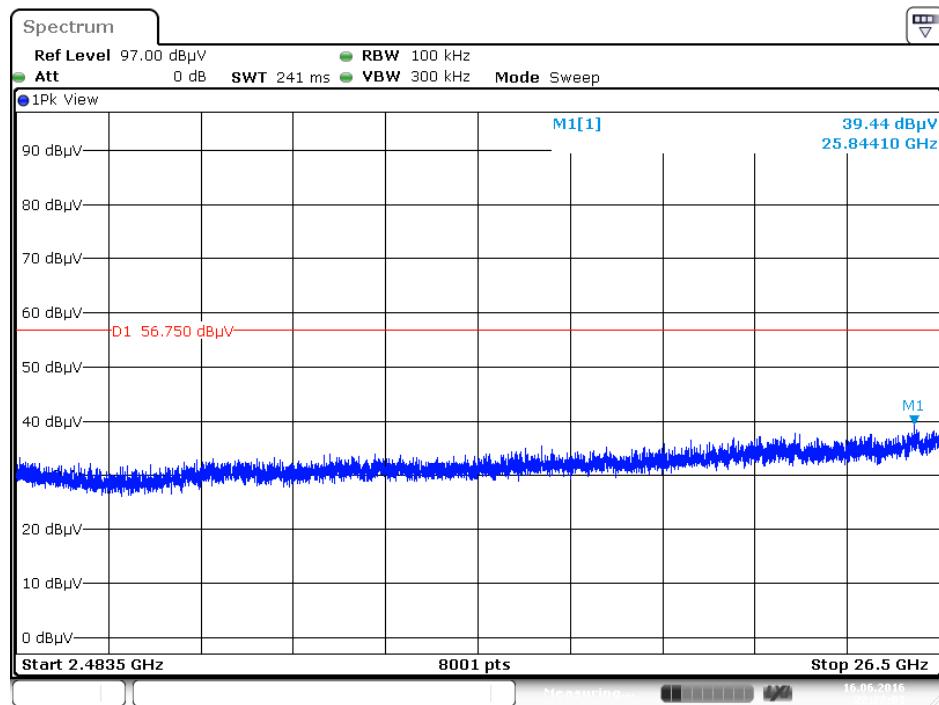

### Plot on Configuration For BR (GFSK) / Channel 78 / Reference Level

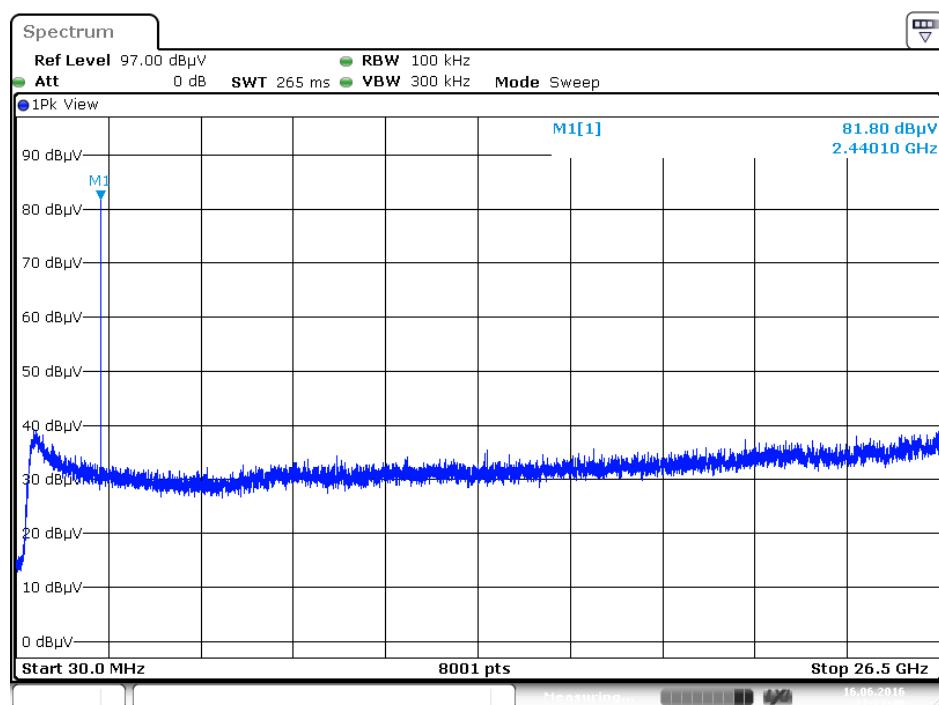


### Plot on Configuration For BR (GFSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

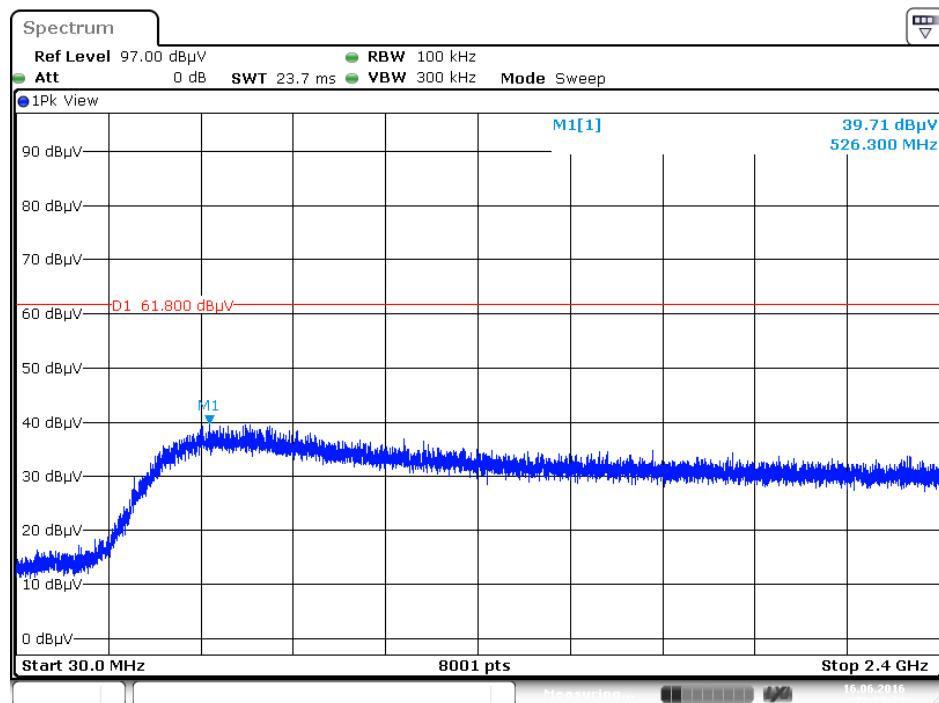


Date: 16 JUN 2016 22:23:23

### Plot on Configuration For BR (GFSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)

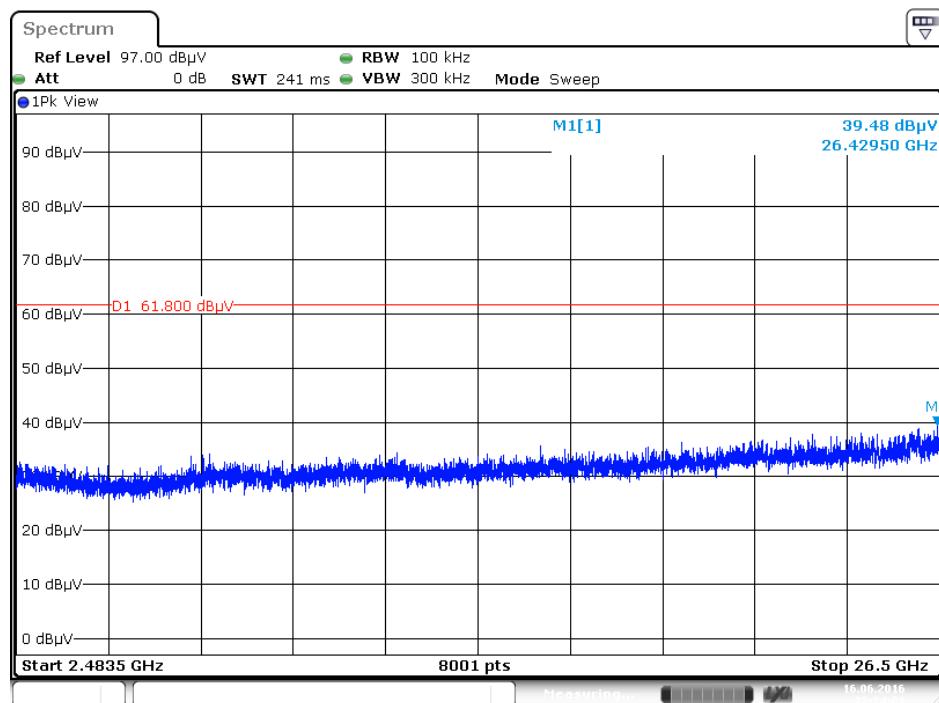


Date: 16 JUN 2016 22:24:01

### Plot on Configuration For BR (GFSK) / Hopping / Reference Level

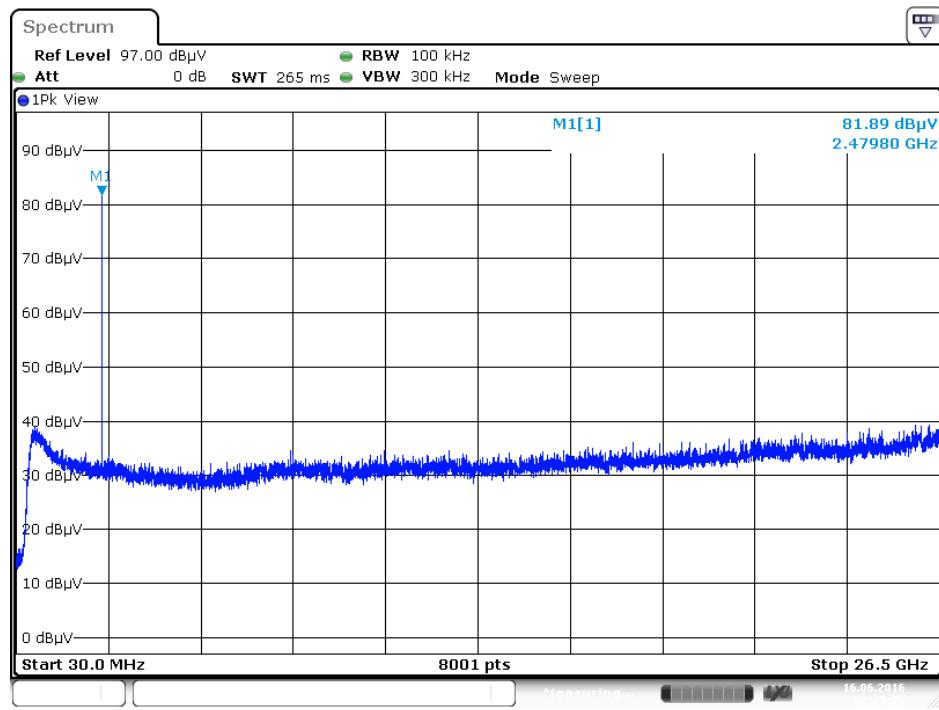


Date: 16 JUN 2016 22:25:25

### Plot on Configuration For BR (GFSK) / Hopping / 30MHz~2400MHz (down 20dBc)

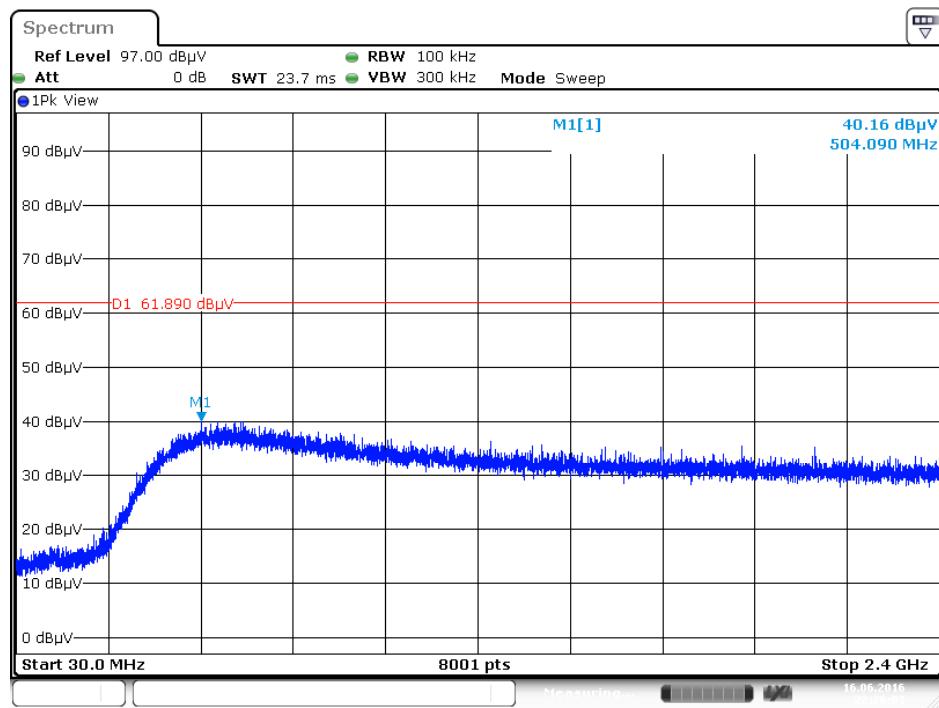


Date: 16 JUN 2016 22:26:01

**Plot on Configuration For BR (GFSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)**

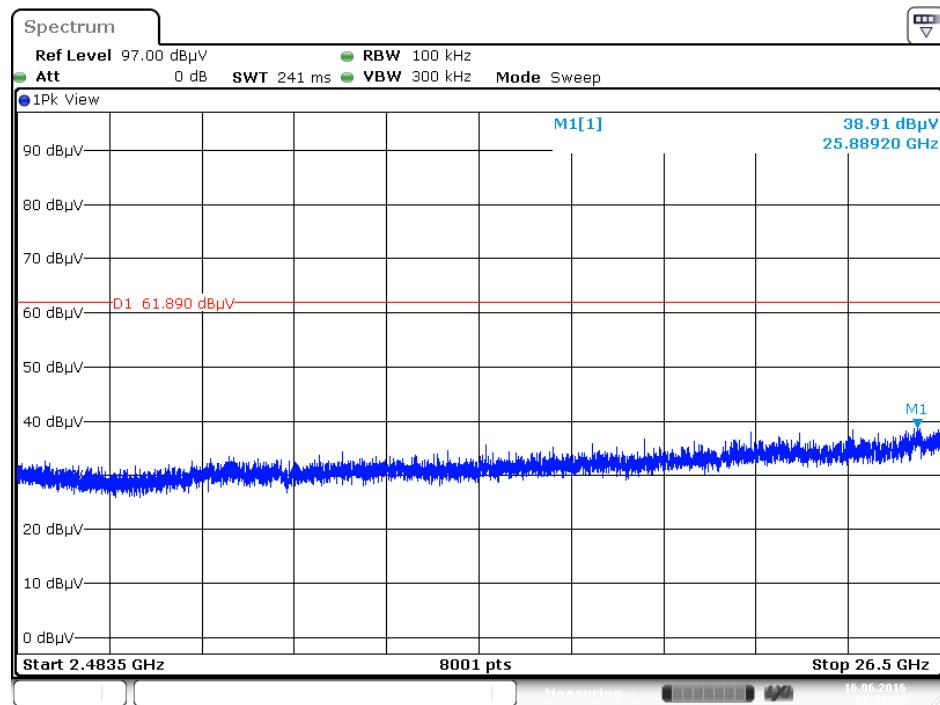


Date: 16 JUN 2016 22:26:30


### Plot on Configuration For EDR (8DPSK) / Channel 0 / Reference Level

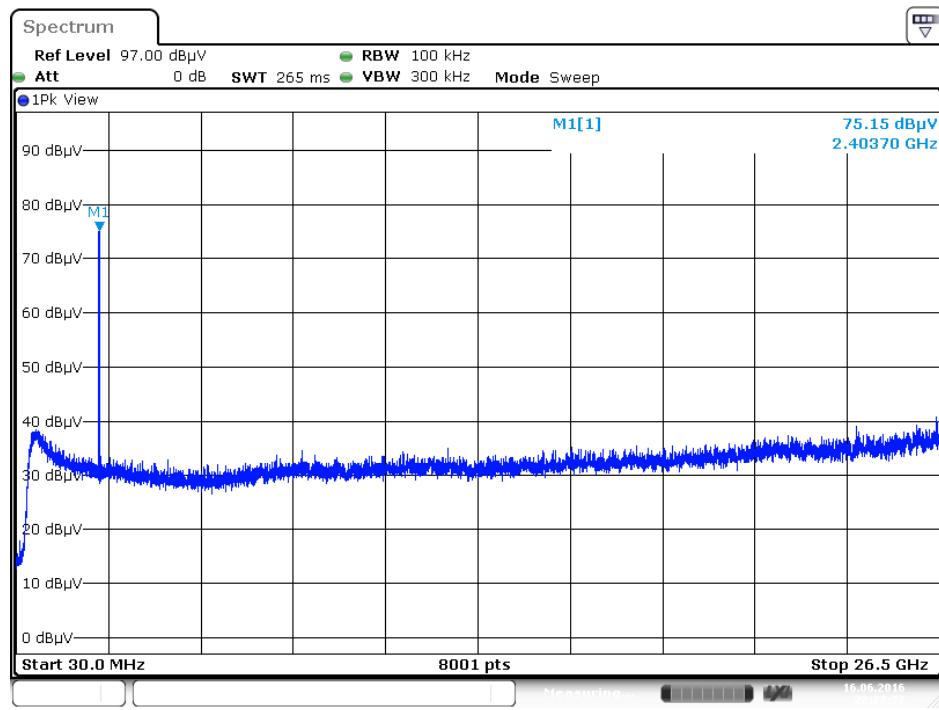

### Plot on Configuration For EDR (8DPSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

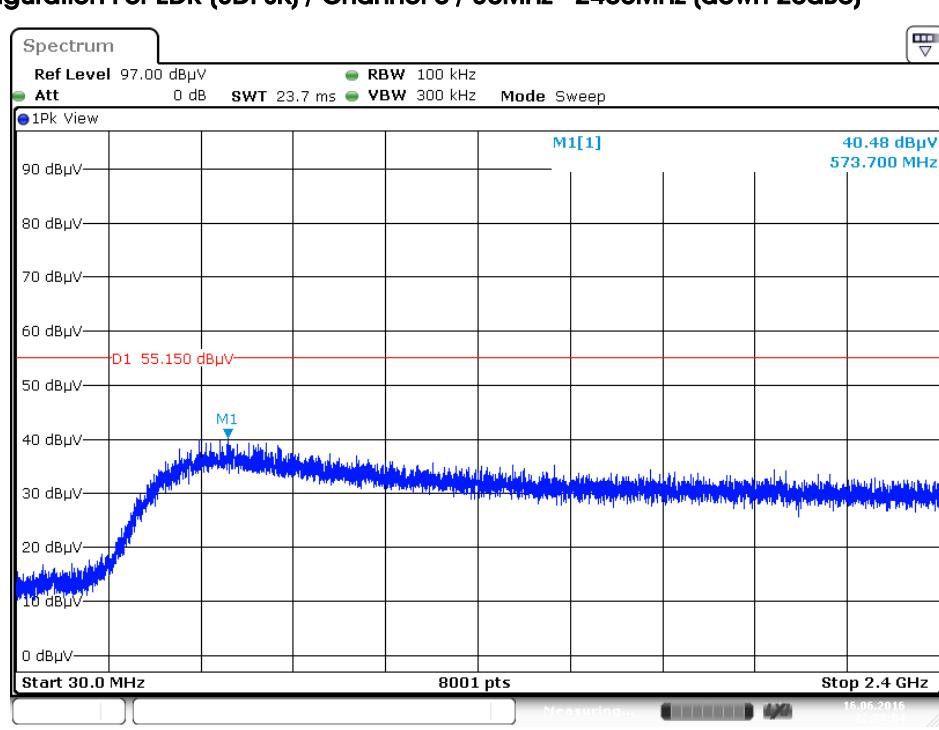


### Plot on Configuration For EDR (8DPSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)

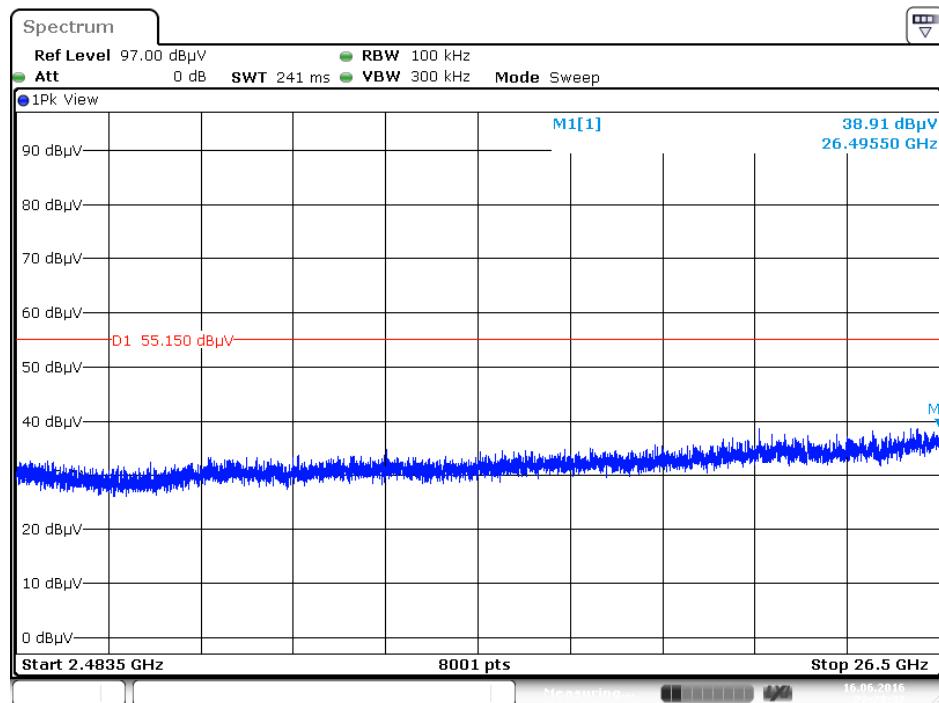


Date: 16 JUN 2016 22:28:32

### Plot on Configuration For EDR (8DPSK) / Channel 78 / Reference Level

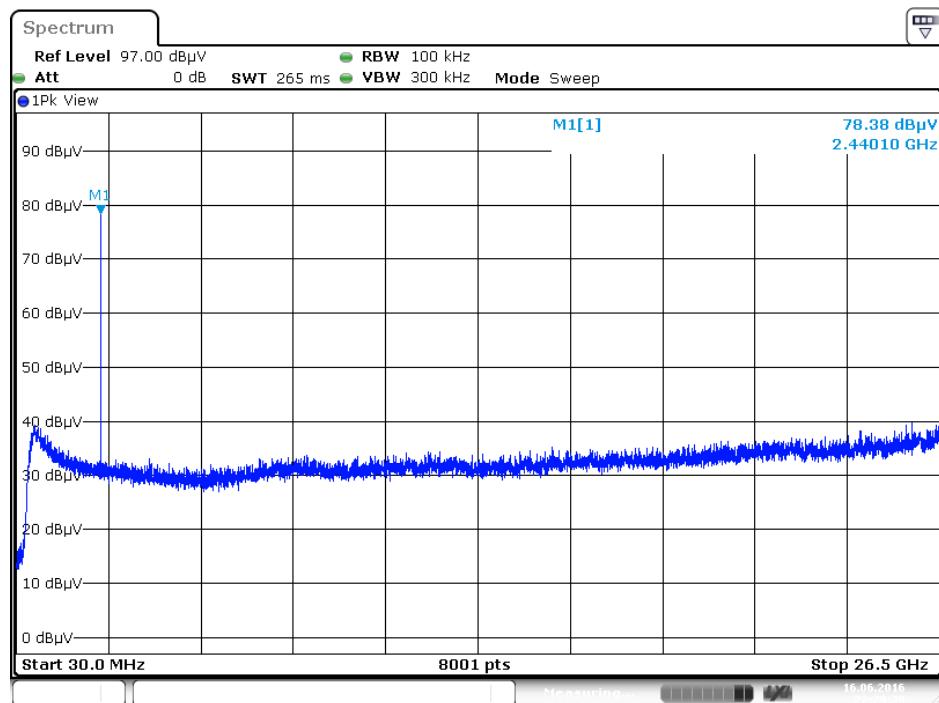


Date: 16 JUN 2016 22:29:30


### Plot on Configuration For EDR (8DPSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

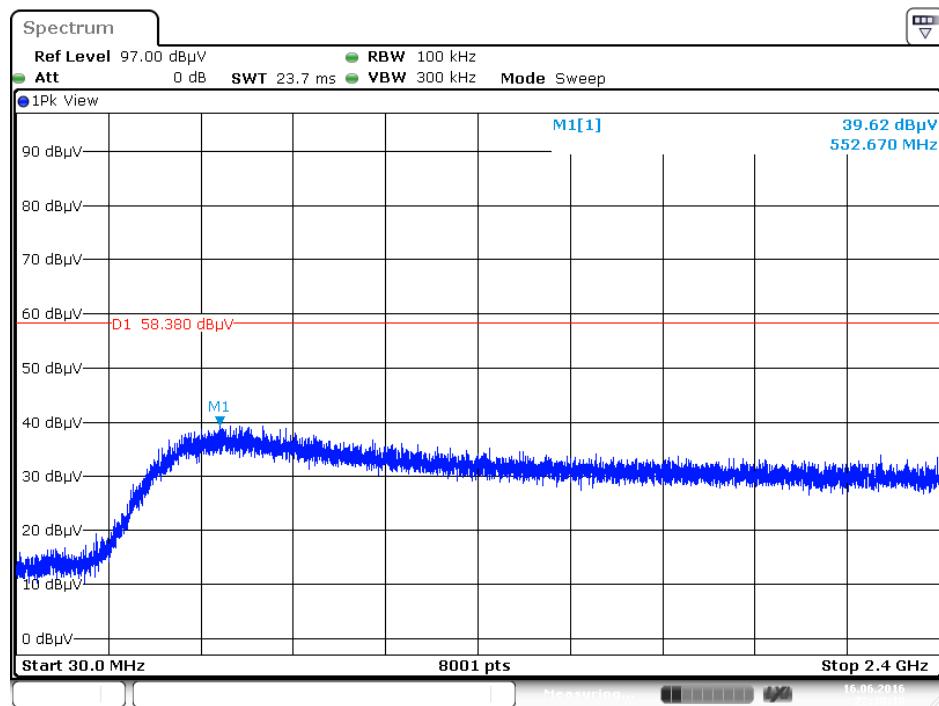


### Plot on Configuration For EDR (8DPSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)

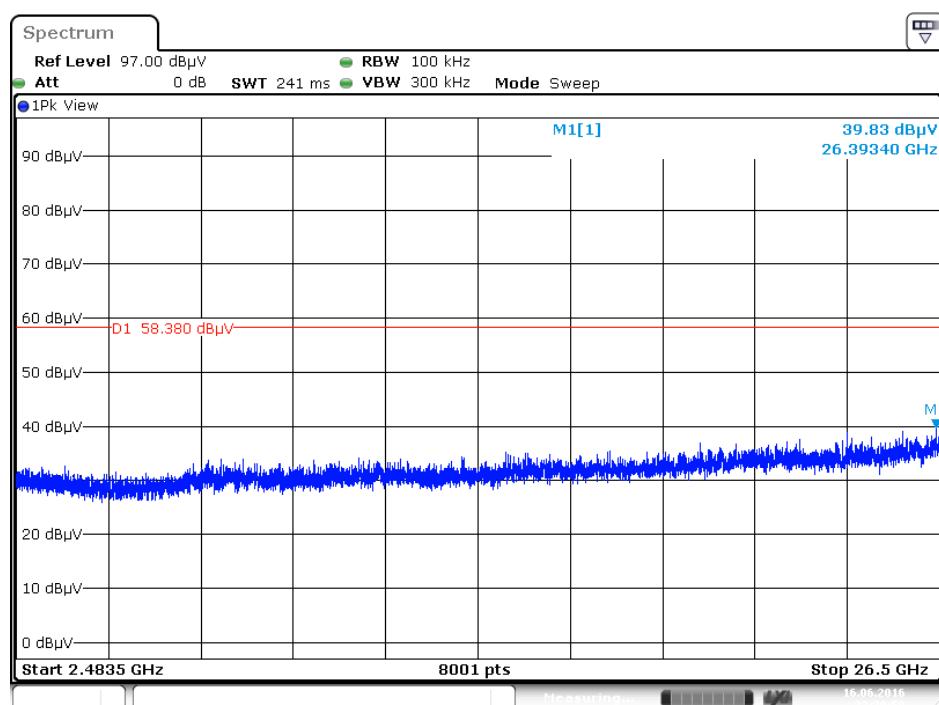


### Plot on Configuration For EDR (8DPSK) / Hopping / Reference Level

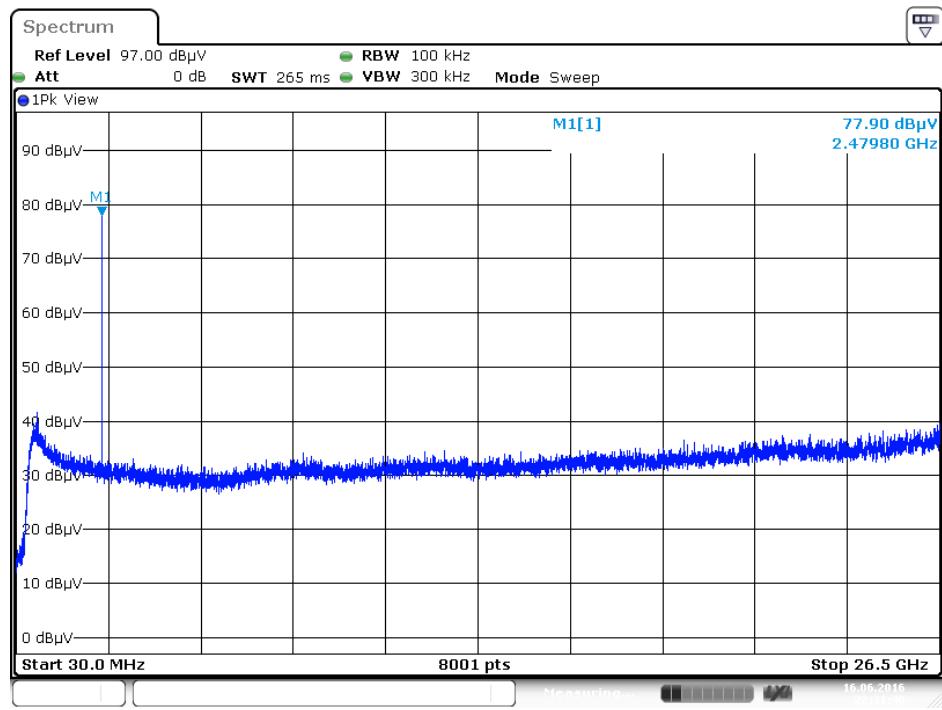

### Plot on Configuration For EDR (8DPSK) / Hopping / 30MHz~2400MHz (down 20dBc)

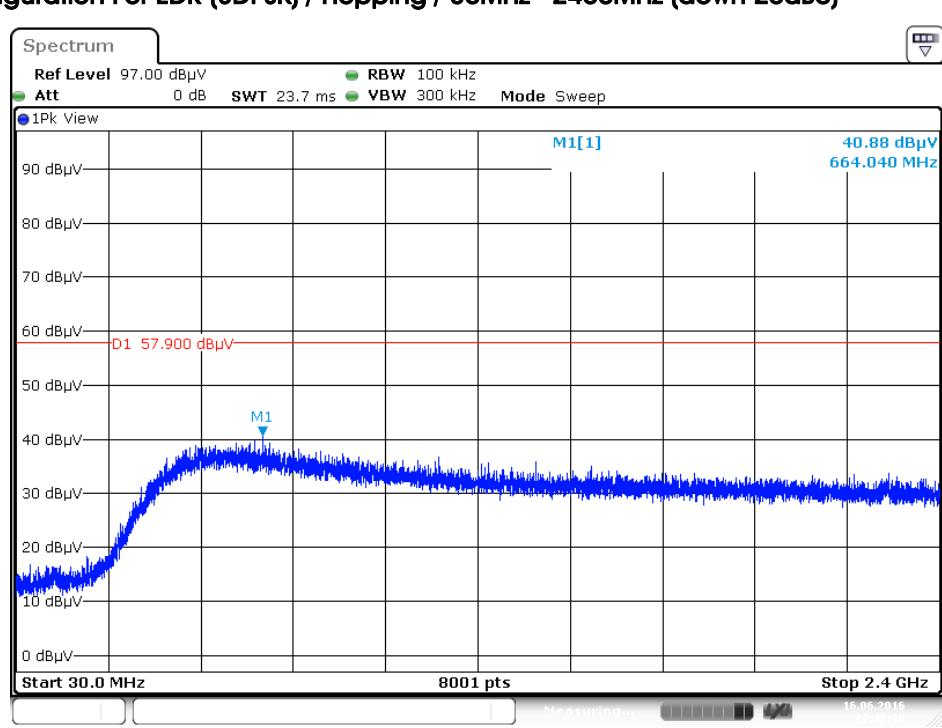


**Plot on Configuration For EDR (8DPSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)**

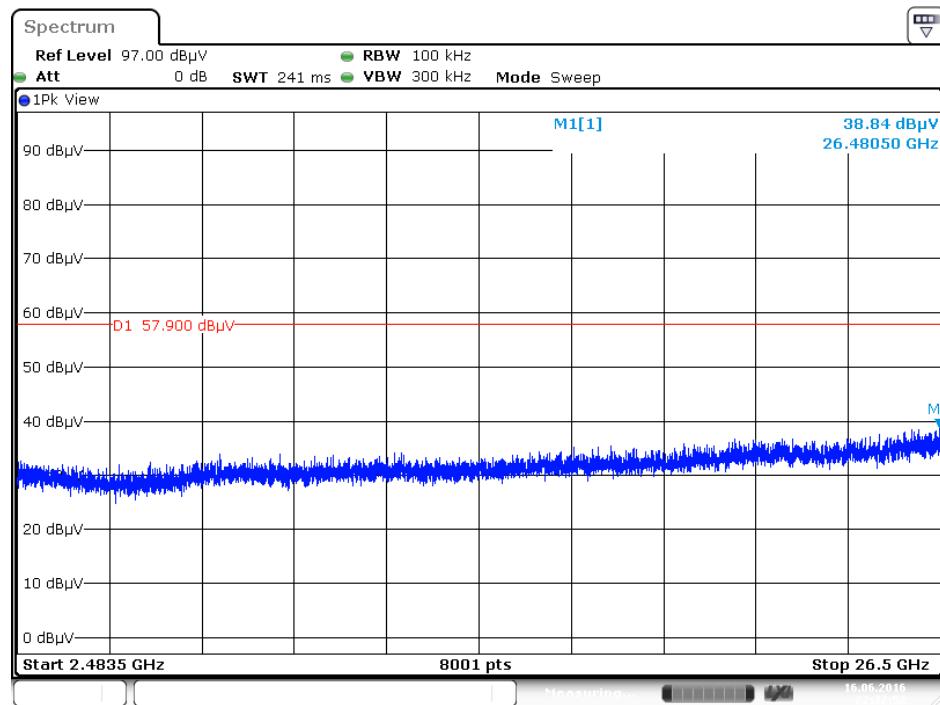


### PIFA Antenna

#### Plot on Configuration For BR (GFSK) / Channel 0 / Reference Level

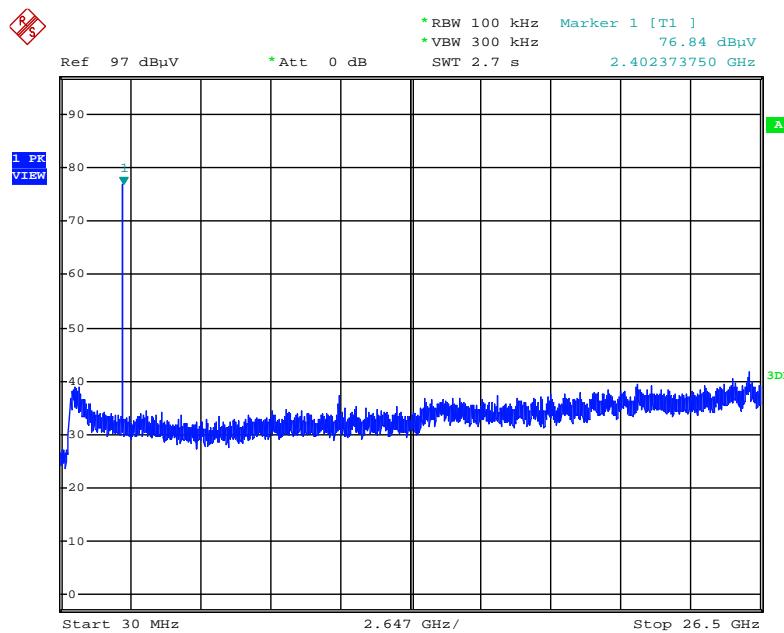


Date: 16.JUN.2016 05:11:03

#### Plot on Configuration For BR (GFSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

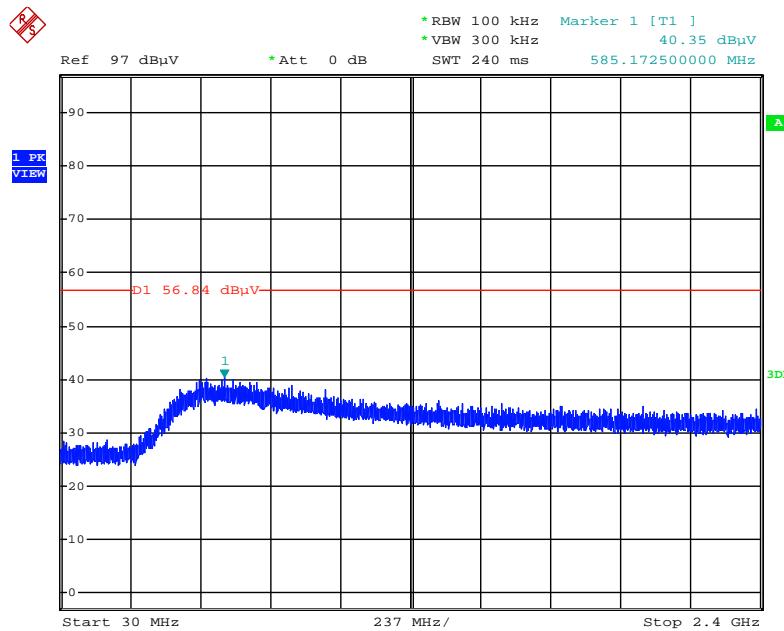


Date: 16.JUN.2016 05:12:40

**Plot on Configuration For BR (GFSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)**

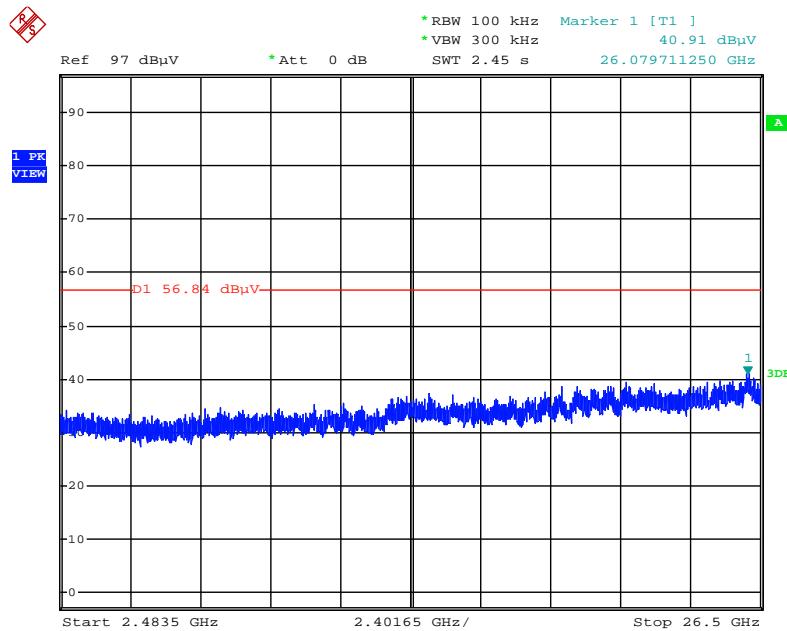


Date: 16.JUN.2016 05:13:38


**Plot on Configuration For BR (GFSK) / Channel 78 / Reference Level**

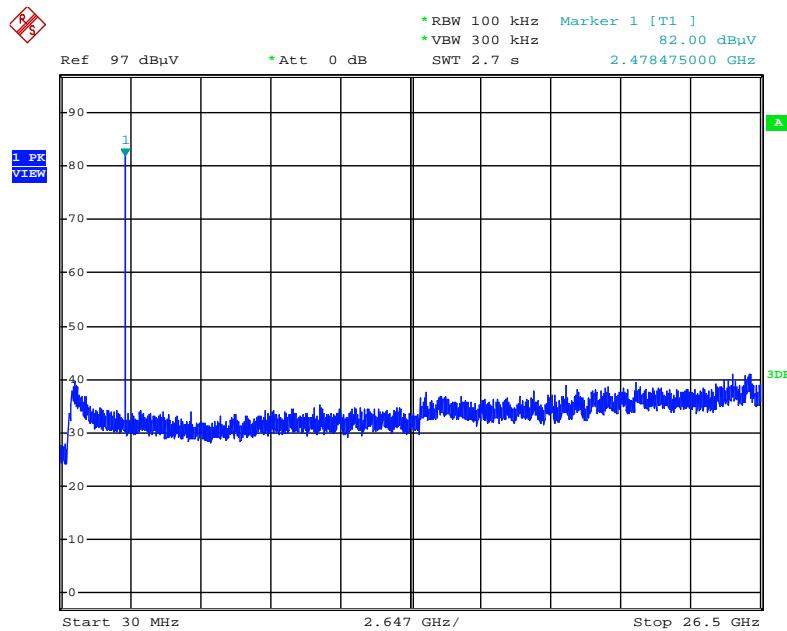

Date: 16.JUN.2016 05:17:52

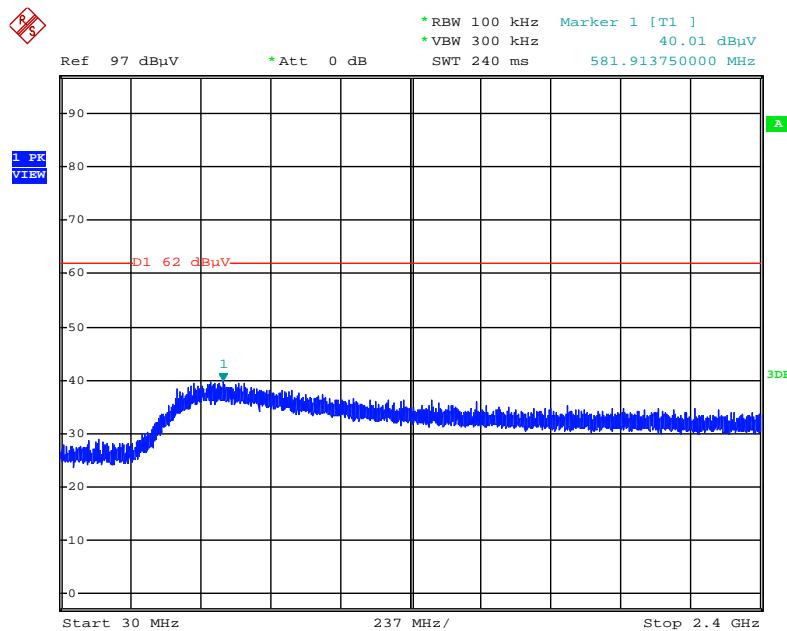
**Plot on Configuration For BR (GFSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)**


Date: 16.JUN.2016 05:19:59

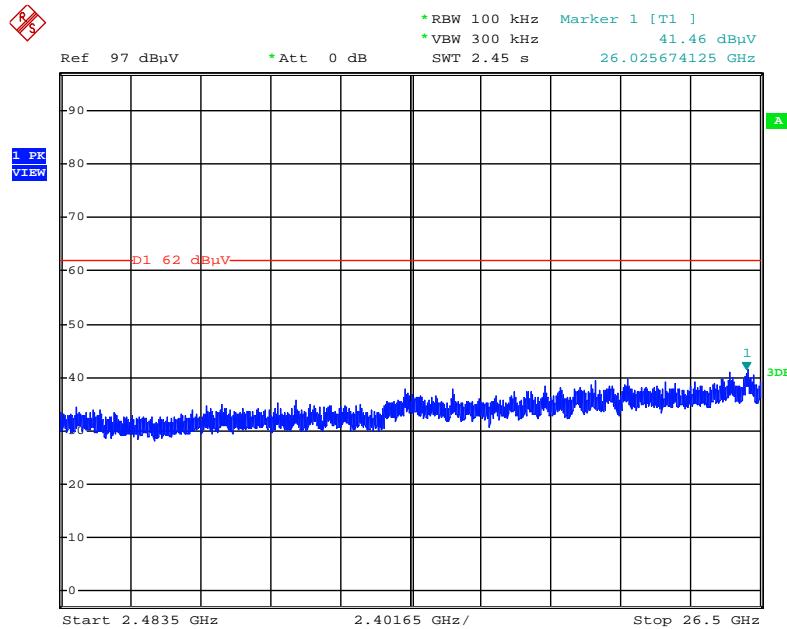**Plot on Configuration For BR (GFSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)**


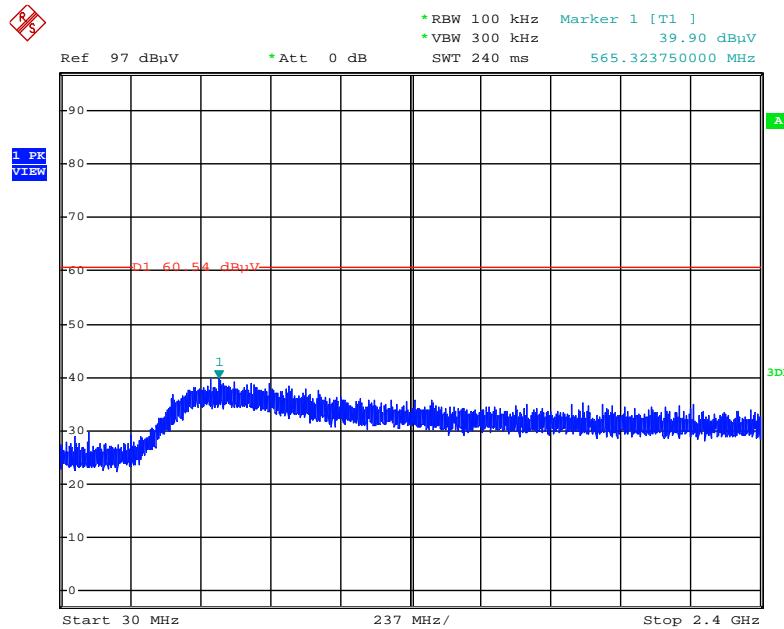
Date: 16.JUN.2016 05:21:04

**Plot on Configuration For BR (GFSK) / Hopping / Reference Level**

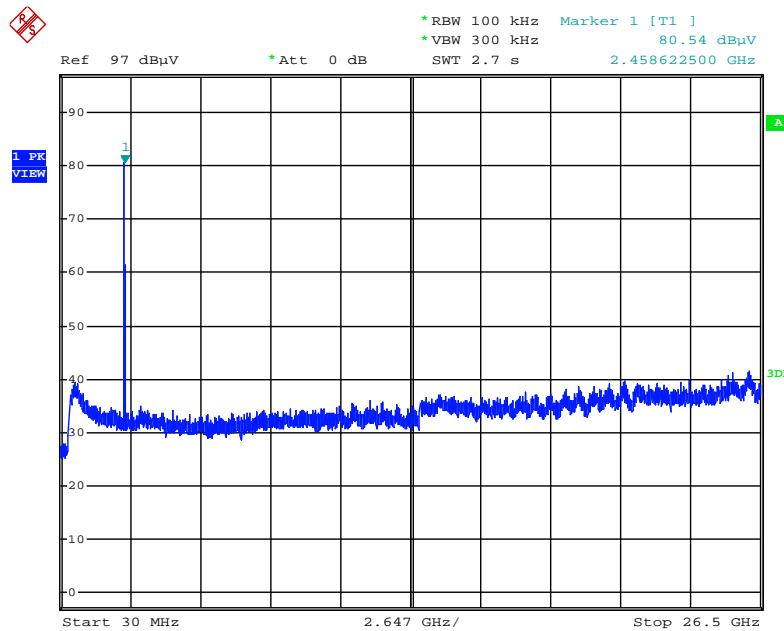


Date: 16.JUN.2016 05:23:59

**Plot on Configuration For BR (GFSK) / Hopping / 30MHz~2400MHz (down 20dBc)**




Date: 16.JUN.2016 05:25:33

**Plot on Configuration For BR (GFSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)**

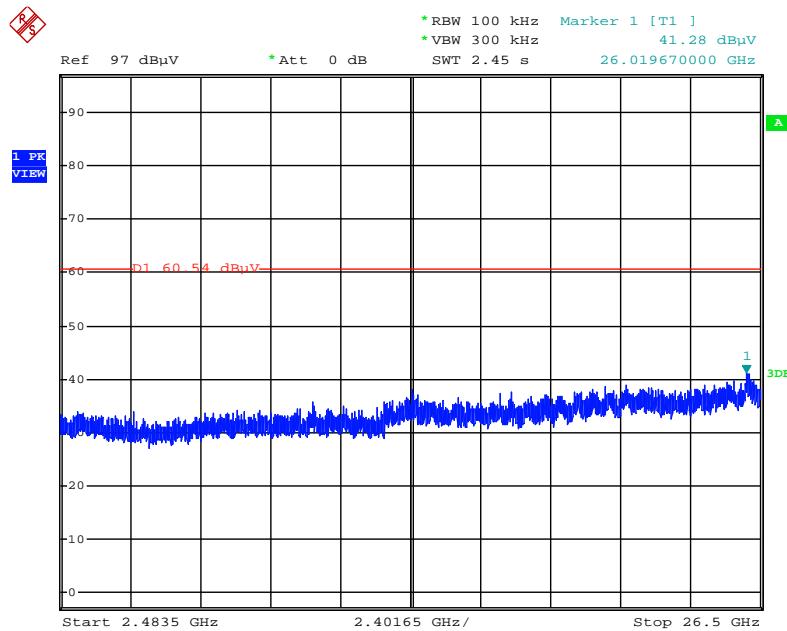


Date: 16.JUN.2016 05:26:04

**Plot on Configuration For EDR (8DPSK) / Channel 0 / Reference Level**

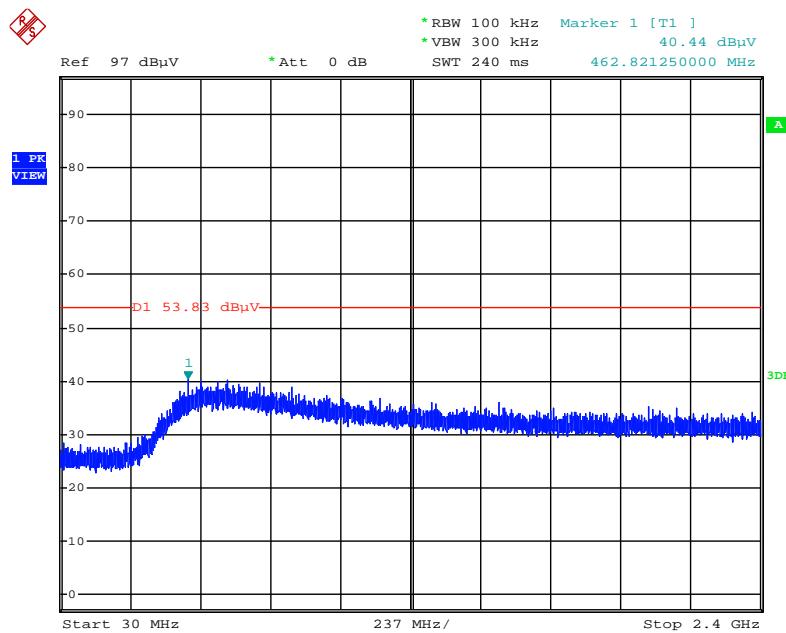


Date: 16.JUN.2016 05:29:54

**Plot on Configuration For EDR (8DPSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)**

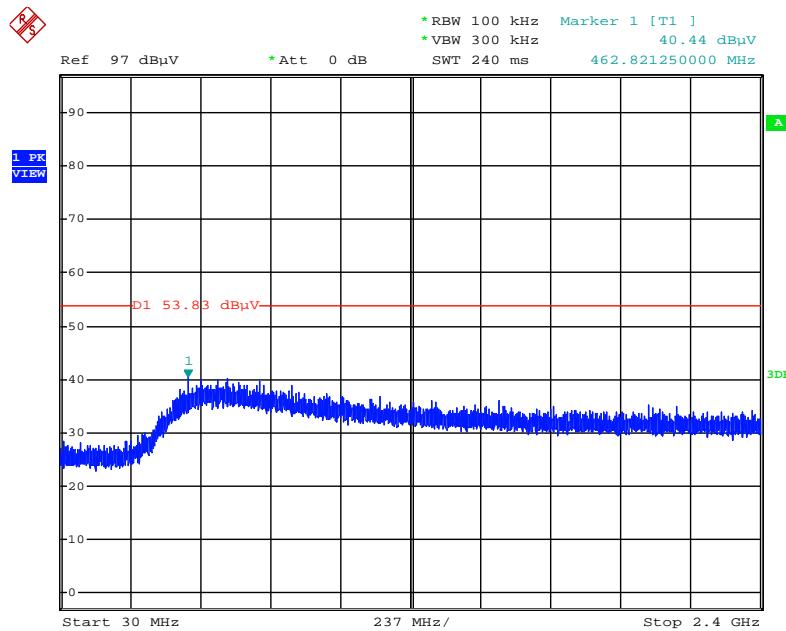


Date: 16.JUN.2016 05:29:54

**Plot on Configuration For EDR (8DPSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)**

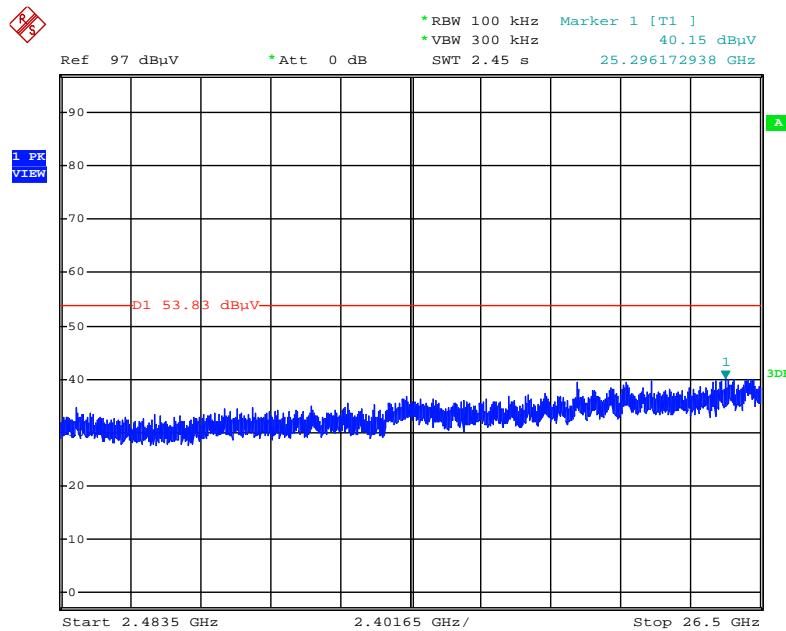


Date: 16.JUN.2016 05:30:31

**Plot on Configuration For EDR (8DPSK) / Channel 78 / Reference Level**

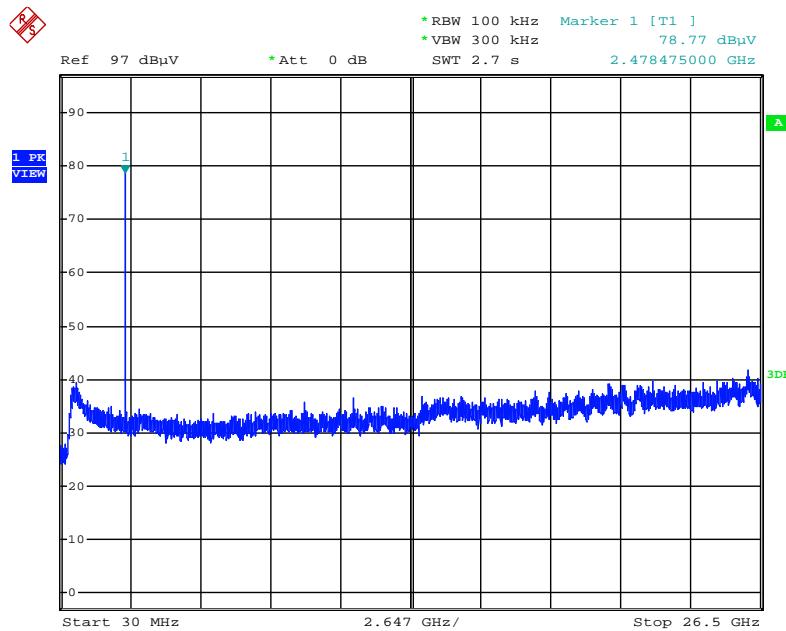


Date: 16.JUN.2016 05:35:47

### Plot on Configuration For EDR (8DPSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

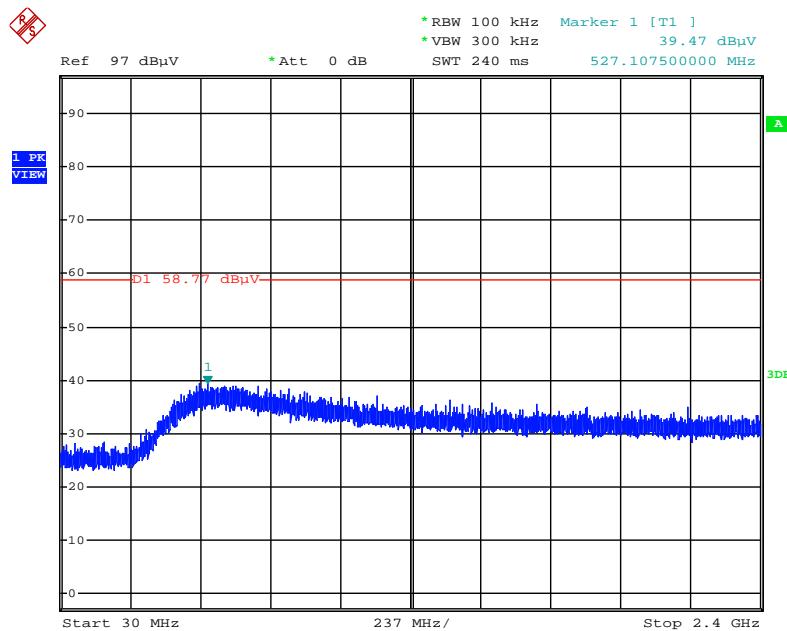


Date: 16.JUN.2016 05:36:34

### Plot on Configuration For EDR (8DPSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)

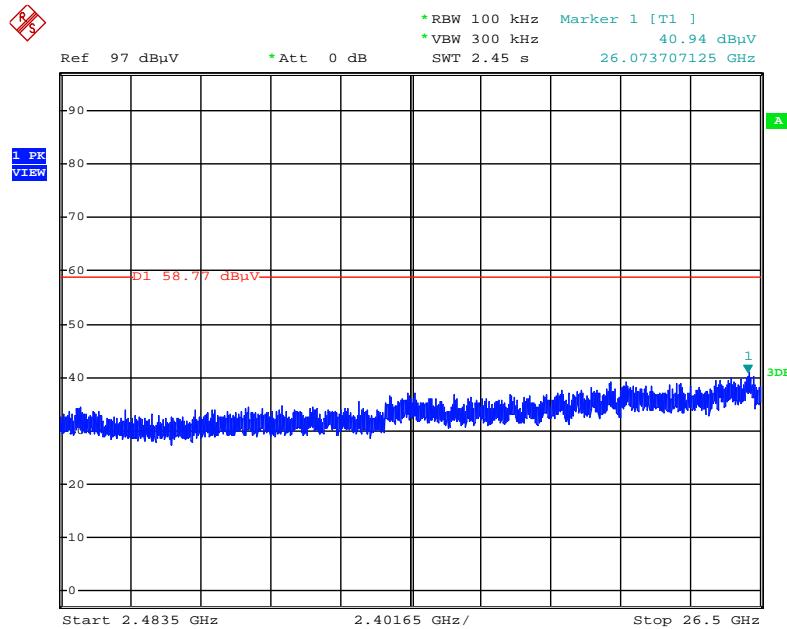


Date: 16.JUN.2016 05:37:03

### Plot on Configuration For EDR (8DPSK) / Hopping / Reference Level

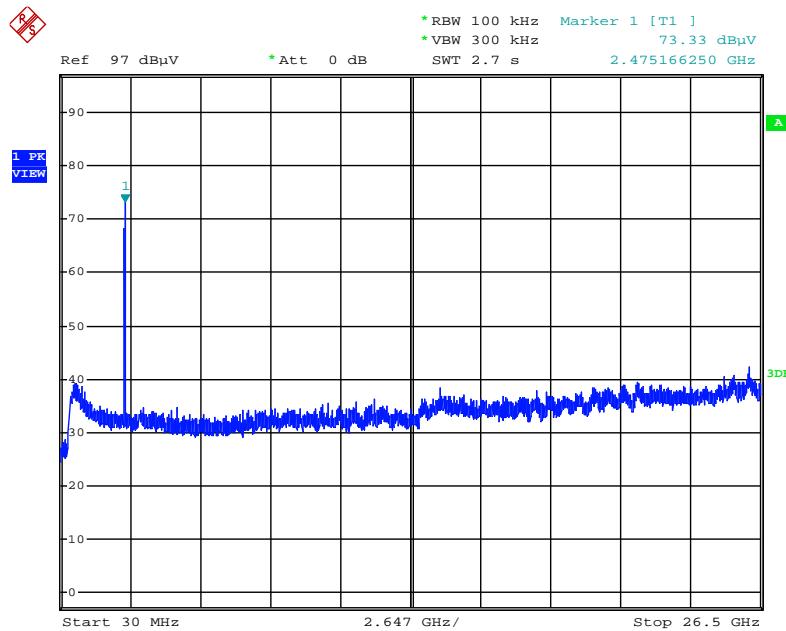


Date: 16.JUN.2016 05:38:51

### Plot on Configuration For EDR (8DPSK) / Hopping / 30MHz~2400MHz (down 20dBc)

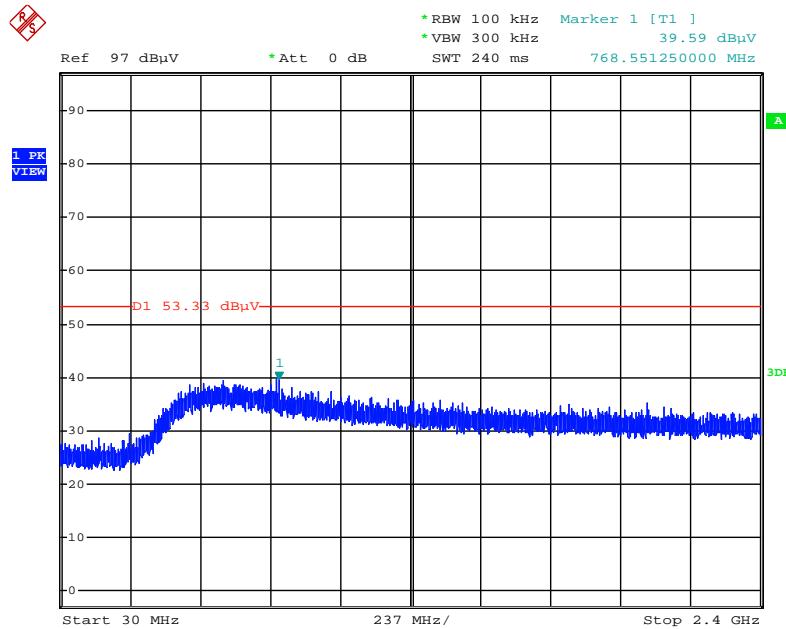

Date: 16.JUN.2016 05:39:49

**Plot on Configuration For EDR (8DPSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)**

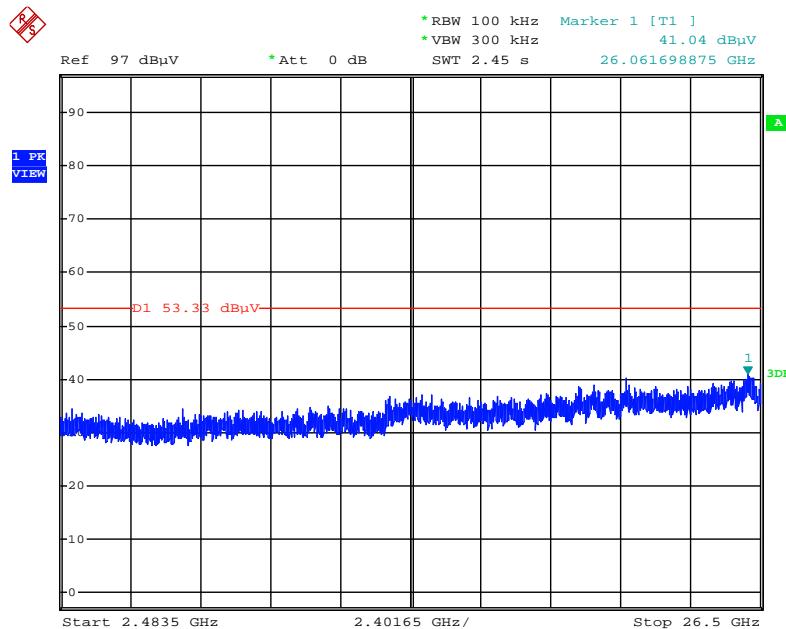

Date: 16.JUN.2016 05:40:27

## 4.8. Antenna Requirements

### 4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

### 4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	TESEQ	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Mar. 01, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%