



# FCC SAR Test Report

APPLICANT : Realtek Semiconductor Corp.  
EQUIPMENT : 802.11a/b/g/n/ac RTL8822BE Combo module  
BRAND NAME : REALTEK  
MODEL NAME : RTL8822BE  
FCC ID : TX2-RTL8822BE  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Deputy Manager

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

1. Statement of Compliance .....	4
2. Administration Data .....	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	5
4.1 General Information .....	5
5. RF Exposure Limits.....	6
5.1 Uncontrolled Environment.....	6
5.2 Controlled Environment.....	6
6. Specific Absorption Rate (SAR).....	7
6.1 Introduction .....	7
6.2 SAR Definition.....	7
7. System Description and Setup .....	8
7.1 E-Field Probe .....	9
7.2 Data Acquisition Electronics (DAE) .....	9
7.3 Phantom.....	10
7.4 Device Holder.....	11
8. Measurement Procedures .....	12
8.1 Spatial Peak SAR Evaluation.....	12
8.2 Power Reference Measurement.....	13
8.3 Area Scan .....	13
8.4 Zoom Scan.....	14
8.5 Volume Scan Procedures.....	15
8.6 Power Drift Monitoring.....	15
9. Test Equipment List .....	15
10. System Verification .....	16
10.1 Tissue Simulating Liquids.....	16
10.2 Tissue Verification .....	17
10.3 System Performance Check Results.....	18
11. Conducted RF Output Power (Unit: dBm).....	19
12. SAR Test Results .....	30
12.1 Body SAR .....	31
13. Simultaneous Transmission Analysis.....	32
13.1 Body Exposure Conditions .....	32
13.2 Enhanced Energy Coupling .....	33
14. Uncertainty Assessment .....	34
15. References.....	37
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



## Revision History



## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Realtek Semiconductor Corp., 802.11a/b/g/n/ac RTL8822BE Combo module, RTL8822BE** are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	
		Body (Separation 5mm)	1g SAR (W/kg)
		1g SAR (W/kg)	
DTS	2.4GHz WLAN	0.75	1.51
NII	5GHz WLAN	0.79	1.59
DSS	Bluetooth	0.08	0.88
Date of Testing:		2016/9/29 ~ 2016/9/30	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications



## 2. Administration Data

Testing Laboratory	
<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
<b>Company Name</b>	Realtek Semiconductor Corp.
<b>Address</b>	No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan

Manufacturer	
<b>Company Name</b>	Realtek Semiconductor Corp.
<b>Address</b>	No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan

## 3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02

## 4. Equipment Under Test (EUT) Information

### 4.1 General Information

Product Feature & Specification	
<b>Equipment Name</b>	802.11a/b/g/n/ac RTL8822BE Combo module
<b>Brand Name</b>	REALTEK
<b>Model Name</b>	RTL8822BE
<b>FCC ID</b>	TX2-RTL8822BE
<b>Wireless Technology and Frequency Range</b>	WLAN 2.4GHz Band: 2412 MHz ~ 2472 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
<b>Mode</b>	• 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 • Bluetooth BR/EDR/LE/HS
<b>HW Version</b>	2V0
<b>EUT Stage</b>	Identical Prototype



## 5. RF Exposure Limits

### 5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

#### Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

#### Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



## 6. Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

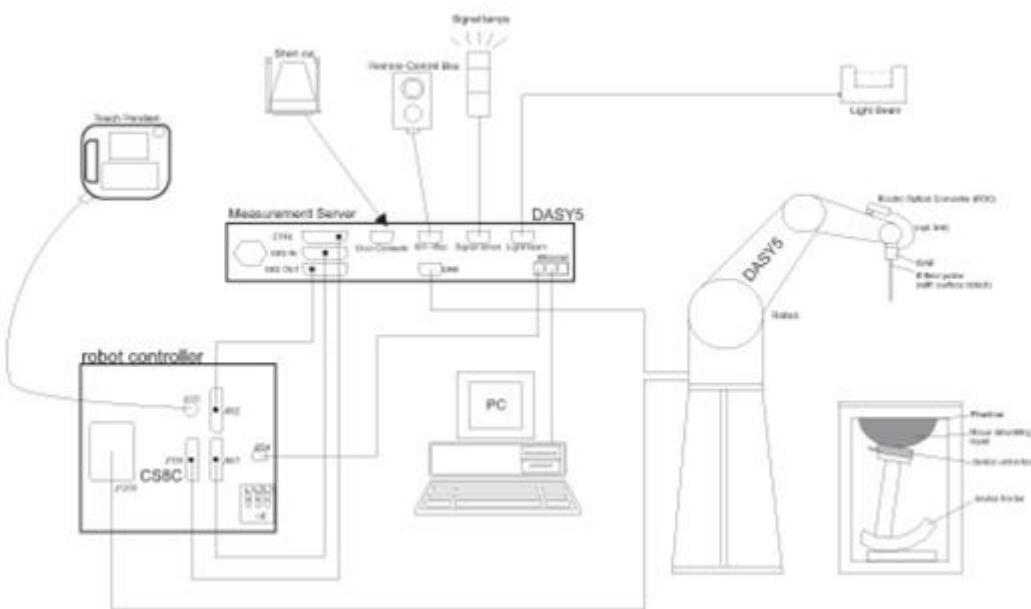

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

#### <ES3DV3 Probe>

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

#### <EX3DV4 Probe>

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

### 7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE



### 7.3 Phantom

#### <SAM Twin Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

#### <ELI Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 7.4 Device Holder

### <Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held  
Transmitters



Mounting Device Adaptor for Wide-Phones

### <Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



## **8. Measurement Procedures**

The measurement procedures are as follows:

**<Conducted power measurement>**

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

**<SAR measurement>**

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



## **8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## **8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}$ , $\Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



## 8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$  graded grid	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

\* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is  $\leq 1.4$  W/kg,  $\leq 8$  mm,  $\leq 7$  mm and  $\leq 5$  mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.



## **8.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## **8.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## **9. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 30, 2016	Aug. 29, 2017
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Jul. 27, 2016	Jul. 26, 2017
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 23, 2015	Nov. 22, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 24, 2015	Nov. 23, 2016
WonDer	Thermometer	WD-5015	TM281	Oct. 16, 2015	Oct. 15, 2016
R&S	BT Base Station	CBT32	100519	Jun. 03, 2016	Jun. 02, 2017
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	MG3710A	6201502524	Dec. 18, 2015	Dec. 17, 2016
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 12, 2016	Jan. 11, 2017
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 19, 2016	Jul. 18, 2017
Anritsu	Power Meter	ML2495A	1419002	May. 10, 2016	May. 09, 2017
Anritsu	Power Sensor	MA2411B	1339124	May. 10, 2016	May. 09, 2017
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 22, 2016	Aug. 21, 2017
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 21, 2016	Jun. 20, 2017
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 16, 2016	Mar. 15, 2017
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 16, 2016	Mar. 15, 2017
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

### **General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

## 10. System Verification

### 10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR



## 10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%


## < Tissue Dielectric Parameter Check Results >

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
2450	MSL	22.3	1.925	52.973	1.95	52.70	-1.28	0.52	$\pm 5$	2016/9/30
5250	MSL	22.3	5.417	46.708	5.36	48.95	1.06	-4.58	$\pm 5$	2016/9/29
5600	MSL	22.3	5.860	46.145	5.77	48.50	1.56	-4.86	$\pm 5$	2016/9/29
5750	MSL	22.3	6.046	45.950	5.94	48.28	1.78	-4.83	$\pm 5$	2016/9/29

### 10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2016/9/30	2450	MSL	250	D2450V2-736	EX3DV4 - SN3955	DAE4 Sn1399	12.10	52.10	48.40	-7.10
2016/9/29	5250	MSL	100	D5GHzV2-1128	EX3DV4 - SN3955	DAE4 Sn1399	7.77	74.50	77.70	4.30
2016/9/29	5600	MSL	100	D5GHzV2-1128	EX3DV4 - SN3955	DAE4 Sn1399	7.87	78.00	78.70	0.90
2016/9/29	5750	MSL	100	D5GHzV2-1128	EX3DV4 - SN3955	DAE4 Sn1399	7.53	76.10	75.30	-1.05

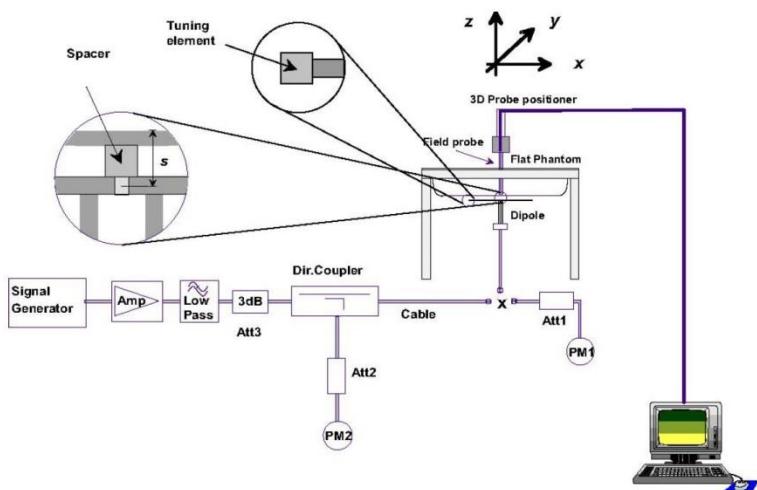

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**



## 11. Conducted RF Output Power (Unit: dBm)

### <WLAN Conducted Power>

#### General Note:

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6W/kg and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.<sup>18</sup> The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
7. For RTL8822BE, channel #12 and #13 SAR testing are not necessary, due to the maximum power is smaller than other channels, the maximum power please refer to WLAN conducted power table.

<2.4GHz WLAN ANT 1>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN ANT 1	802.11b	CH 1	2412	1Mbps	17.18	17.20	100.00
		CH 6	2437		17.19	17.20	
		CH 11	2462		15.40	16.00	
		CH 12	2467		14.39	14.50	
		CH 13	2472		11.31	11.50	
	802.11g	CH 1	2412	6Mbps	15.84	16.00	99.80
		CH 6	2437		16.85	17.00	
		CH 11	2462		15.26	16.00	
		CH 12	2467		12.38	12.50	
		CH 13	2472		9.47	9.50	
	802.11n-HT20	CH 1	2412	MCS0	15.62	16.00	99.70
		CH 6	2437		16.96	17.00	
		CH 11	2462		14.32	14.50	
		CH 12	2467		11.38	11.50	
		CH 13	2472		8.45	8.50	
	802.11ac-VHT20	CH 1	2412	MCS0	15.85	16.00	99.70
		CH 6	2437		16.98	17.00	
		CH 11	2462		14.33	14.50	
		CH 12	2467		11.41	11.50	
		CH 13	2472		8.47	8.50	
	802.11n-HT40	CH 3	2422	MCS0	14.73	15.00	99.40
		CH 6	2437		17.12	17.50	
		CH 9	2452		14.13	14.50	
		CH 10	2457		11.41	11.50	
		CH 11	2462		8.36	8.50	
	802.11ac-VHT40	CH 3	2422	MCS0	14.91	15.00	99.40
		CH 6	2437		17.16	17.50	
		CH 9	2452		14.44	14.50	
		CH 10	2457		11.48	11.50	
		CH 11	2462		8.41	8.50	

**<2.4GHz WLAN ANT 2>**

2.4GHz WLAN ANT 2	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b	CH 1	2412	1Mbps	17.18	17.20	100.00
		CH 6	2437		17.19	17.20	
		CH 11	2462		15.40	16.00	
		CH 12	2467		14.39	14.50	
		CH 13	2472		11.31	11.50	
	802.11g	CH 1	2412	6Mbps	15.84	16.00	99.80
		CH 6	2437		16.85	17.00	
		CH 11	2462		15.26	16.00	
		CH 12	2467		12.38	12.50	
		CH 13	2472		9.47	9.50	
	802.11n-HT20	CH 1	2412	MCS0	15.62	16.00	99.70
		CH 6	2437		16.96	17.00	
		CH 11	2462		14.32	14.50	
		CH 12	2467		11.38	11.50	
		CH 13	2472		8.45	8.50	
	802.11ac-VHT20	CH 1	2412	MCS0	15.85	16.00	99.70
		CH 6	2437		16.98	17.00	
		CH 11	2462		14.33	14.50	
		CH 12	2467		11.41	11.50	
		CH 13	2472		8.47	8.50	
	802.11n-HT40	CH 3	2422	MCS0	14.73	15.00	99.40
		CH 6	2437		17.12	17.50	
		CH 9	2452		14.13	14.50	
		CH 10	2457		11.41	11.50	
		CH 11	2462		8.36	8.50	
	802.11ac-VHT40	CH 3	2422	MCS0	14.91	15.00	99.40
		CH 6	2437		17.16	17.50	
		CH 9	2452		14.44	14.50	
		CH 10	2457		11.48	11.50	
		CH 11	2462		8.41	8.50	

<2.4GHz WLAN ANT 1+2>

2.4GHz WLAN ANT 1+2	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11g	CH 1	2412	6Mbps	14.56	15.00	99.80
		CH 6	2437		16.97	17.50	
		CH 11	2462		17.51	18.00	
		CH 12	2467		14.05	14.50	
		CH 13	2472		12.19	12.50	
	802.11n-HT20	CH 1	2412	MCS0	17.11	17.50	99.70
		CH 6	2437		16.96	17.50	
		CH 11	2462		16.92	17.50	
		CH 12	2467		15.01	15.50	
		CH 13	2472		12.12	12.50	
	802.11ac-VHT20	CH 1	2412	MCS0	17.14	17.50	99.70
		CH 6	2437		17.00	17.50	
		CH 11	2462		16.99	17.50	
		CH 12	2467		15.07	15.50	
		CH 13	2472		12.21	12.50	
	802.11n-HT40	CH 3	2422	MCS0	16.10	16.50	99.40
		CH 6	2437		16.94	17.00	
		CH 9	2452		17.13	17.50	
		CH 10	2457		15.84	16.00	
		CH 11	2462		13.69	14.00	
	802.11ac-VHT40	CH 3	2422	MCS0	16.28	16.50	99.40
		CH 6	2437		16.95	17.00	
		CH 9	2452		17.14	17.50	
		CH 10	2457		15.92	16.00	
		CH 11	2462		13.77	14.00	

<5GHz WLAN ANT1>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN ANT 1	802.11a	CH 36	5180	6Mbps	16.49	17.00	99.80
		CH 40	5200		16.25	17.00	
		CH 44	5220		16.27	17.00	
		CH 48	5240		16.13	17.00	
	802.11n-HT20	CH 36	5180	MCS0	15.92	17.00	99.60
		CH 40	5200		16.22	17.00	
		CH 44	5220		16.24	17.00	
		CH 48	5240		16.06	17.00	
	802.11n-HT40	CH 38	5190	MCS0	12.86	13.00	99.40
		CH 46	5230		16.14	17.00	
	802.11ac-VHT20	CH 36	5180	MCS0	16.04	17.00	99.60
		CH 40	5200		16.25	17.00	
		CH 44	5220		16.26	17.00	
		CH 48	5240		16.16	17.00	
	802.11ac-VHT40	CH 38	5190	MCS0	12.90	13.00	99.40
		CH 46	5230		16.47	17.00	
	802.11ac-VHT80	CH 42	5210	MCS0	12.17	12.50	98.90

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN ANT 1	802.11a	CH 52	5260	6Mbps	16.29	17.00	99.80
		CH 56	5280		16.45	17.00	
		CH 60	5300		16.40	17.00	
		CH 64	5320		16.22	17.00	
	802.11n-HT20	CH 52	5260	MCS0	16.12	17.00	99.60
		CH 56	5280		16.15	17.00	
		CH 60	5300		16.18	17.00	
		CH 64	5320		16.17	17.00	
	802.11n-HT40	CH 54	5270	MCS0	16.44	17.00	99.40
		CH 62	5310		13.18	13.50	
	802.11ac-VHT20	CH 52	5260	MCS0	16.23	17.00	99.60
		CH 56	5280		16.24	17.00	
		CH 60	5300		16.25	17.00	
		CH 64	5320		16.22	17.00	
	802.11ac-VHT40	CH 54	5270	MCS0	16.52	17.00	99.40
		CH 62	5310		13.27	13.50	
	802.11ac-VHT80	CH 58	5290	MCS0	12.16	12.50	98.90



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN ANT 1	802.11a	CH 100	5500	6Mbps	14.42	15.00	99.80
		CH 116	5580		14.63	15.00	
		CH 124	5620		14.83	15.00	
		CH 132	5660		14.45	15.00	
		CH 140	5700		14.83	15.00	
		CH 144	5720		14.63	15.00	
	802.11n-HT20	CH 100	5500	MCS0	14.68	15.00	99.60
		CH 116	5580		14.78	15.00	
		CH 124	5620		14.68	15.00	
		CH 132	5660		14.77	15.00	
		CH 140	5700		14.68	15.00	
		CH 144	5720		14.44	15.00	
	802.11n-HT40	CH 102	5510	MCS0	13.42	14.00	99.40
		CH 110	5550		14.71	15.00	
		CH 126	5630		14.68	15.00	
		CH 134	5670		14.76	15.00	
		CH 142	5710		14.66	15.00	
	802.11ac-VHT20	CH 100	5500	MCS0	14.78	15.00	99.60
		CH 116	5580		14.80	15.00	
		CH 124	5620		14.77	15.00	
		CH 132	5660		14.81	15.00	
		CH 140	5700		14.72	15.00	
		CH 144	5720		14.52	15.00	
	802.11ac-VHT40	CH 102	5510	MCS0	13.53	14.00	99.40
		CH 110	5550		14.81	15.00	
		CH 126	5630		14.74	15.00	
		CH 134	5670		14.83	15.00	
		CH 142	5710		14.72	15.00	
	802.11ac-VHT80	CH 106	5530	MCS0	12.41	12.50	98.90
		CH 122	5610		14.66	15.00	
		CH 138	5690		14.84	15.00	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN ANT 1	802.11a	CH 149	5745	MCS0	15.02	15.50	99.90
		CH 157	5785		15.10	15.50	
		CH 165	5825		15.11	15.50	
	802.11n-HT20	CH 149	5745	MCS0	14.77	15.50	99.60
		CH 157	5785		14.83	15.50	
		CH 165	5825		14.78	15.50	
	802.11n-HT40	CH 151	5755	MCS0	15.07	15.50	99.40
		CH 159	5795		14.98	15.50	
	802.11ac-VHT20	CH 149	5745	MCS0	14.88	15.50	99.60
		CH 157	5785		15.02	15.50	
		CH 165	5825		14.96	15.50	
	802.11ac-VHT40	CH 151	5755	MCS0	15.11	15.50	99.40
		CH 159	5795		15.08	15.50	
	802.11ac-VHT80	CH 155	5775	MCS0	15.12	15.50	98.90

<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN ANT 2	802.11a	CH 36	5180	6Mbps	16.49	17.00	99.80
		CH 40	5200		16.25	17.00	
		CH 44	5220		16.27	17.00	
		CH 48	5240		16.13	17.00	
	802.11n-HT20	CH 36	5180	MCS0	15.92	17.00	99.60
		CH 40	5200		16.22	17.00	
		CH 44	5220		16.24	17.00	
		CH 48	5240		16.06	17.00	
	802.11n-HT40	CH 38	5190	MCS0	12.86	13.00	99.40
		CH 46	5230		16.14	17.00	
	802.11ac-VHT20	CH 36	5180	MCS0	16.04	17.00	99.60
		CH 40	5200		16.25	17.00	
		CH 44	5220		16.26	17.00	
		CH 48	5240		16.16	17.00	
	802.11ac-VHT40	CH 38	5190	MCS0	12.90	13.00	99.40
		CH 46	5230		16.47	17.00	
	802.11ac-VHT80	CH 42	5210	MCS0	12.17	12.50	98.90

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN ANT 2	802.11a	CH 52	5260	6Mbps	16.29	17.00	99.80
		CH 56	5280		16.45	17.00	
		CH 60	5300		16.40	17.00	
		CH 64	5320		16.22	17.00	
	802.11n-HT20	CH 52	5260	MCS0	16.12	17.00	99.60
		CH 56	5280		16.15	17.00	
		CH 60	5300		16.18	17.00	
		CH 64	5320		16.17	17.00	
	802.11n-HT40	CH 54	5270	MCS0	16.44	17.00	99.40
		CH 62	5310		13.18	13.50	
	802.11ac-VHT20	CH 52	5260	MCS0	16.23	17.00	99.60
		CH 56	5280		16.24	17.00	
		CH 60	5300		16.25	17.00	
		CH 64	5320		16.22	17.00	
	802.11ac-VHT40	CH 54	5270	MCS0	16.52	17.00	99.40
		CH 62	5310		13.27	13.50	
	802.11ac-VHT80	CH 58	5290	MCS0	12.16	12.50	98.90



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN ANT 2	802.11a	CH 100	5500	6Mbps	14.42	15.00	99.80
		CH 116	5580		14.63	15.00	
		CH 124	5620		14.83	15.00	
		CH 132	5660		14.45	15.00	
		CH 140	5700		14.83	15.00	
		CH 144	5720		14.63	15.00	
	802.11n-HT20	CH 100	5500	MCS0	14.68	15.00	99.60
		CH 116	5580		14.78	15.00	
		CH 124	5620		14.68	15.00	
		CH 132	5660		14.77	15.00	
		CH 140	5700		14.68	15.00	
		CH 144	5720		14.44	15.00	
	802.11n-HT40	CH 102	5510	MCS0	13.42	14.00	99.40
		CH 110	5550		14.71	15.00	
		CH 126	5630		14.68	15.00	
		CH 134	5670		14.76	15.00	
		CH 142	5710		14.66	15.00	
	802.11ac-VHT20	CH 100	5500	MCS0	14.78	15.00	99.60
		CH 116	5580		14.80	15.00	
		CH 124	5620		14.77	15.00	
		CH 132	5660		14.81	15.00	
		CH 140	5700		14.72	15.00	
		CH 144	5720		14.52	15.00	
	802.11ac-VHT40	CH 102	5510	MCS0	13.53	14.00	99.40
		CH 110	5550		14.81	15.00	
		CH 126	5630		14.74	15.00	
		CH 134	5670		14.83	15.00	
		CH 142	5710		14.72	15.00	
	802.11ac-VHT80	CH 106	5530	MCS0	12.41	12.50	98.90
		CH 122	5610		14.66	15.00	
		CH 138	5690		14.84	15.00	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN ANT 2	802.11a	CH 149	5745	MCS0	15.02	15.50	99.90
		CH 157	5785		15.10	15.50	
		CH 165	5825		15.11	15.50	
	802.11n-HT20	CH 149	5745	MCS0	14.77	15.50	99.60
		CH 157	5785		14.83	15.50	
		CH 165	5825		14.78	15.50	
	802.11n-HT40	CH 151	5755	MCS0	15.07	15.50	99.40
		CH 159	5795		14.98	15.50	
	802.11ac-VHT20	CH 149	5745	MCS0	14.88	15.50	99.60
		CH 157	5785		15.02	15.50	
		CH 165	5825		14.96	15.50	
	802.11ac-VHT40	CH 151	5755	MCS0	15.11	15.50	99.40
		CH 159	5795		15.08	15.50	
	802.11ac-VHT80	CH 155	5775	MCS0	15.12	15.50	98.90

<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN ANT 1+2	802.11a	CH 36	5180	6Mbps	16.35	17.00	99.80
		CH 40	5200		16.32	17.00	
		CH 44	5220		16.15	17.00	
		CH 48	5240		16.49	17.00	
	802.11n-HT20	CH 36	5180	MCS0	16.07	17.00	99.60
		CH 40	5200		16.13	17.00	
		CH 44	5220		16.17	17.00	
		CH 48	5240		16.02	17.00	
	802.11n-HT40	CH 38	5190	MCS0	15.14	15.50	99.40
		CH 46	5230		16.35	17.00	
	802.11ac-VHT20	CH 36	5180	MCS0	16.21	17.00	99.60
		CH 40	5200		16.16	17.00	
		CH 44	5220		16.30	17.00	
		CH 48	5240		16.13	17.00	
	802.11ac-VHT40	CH 38	5190	MCS0	15.41	15.50	99.40
		CH 46	5230		16.49	17.00	
	802.11ac-VHT80	CH 42	5210	MCS0	13.94	14.00	98.90

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN ANT 1+2	802.11a	CH 52	5260	6Mbps	16.19	17.00	99.80
		CH 56	5280		16.27	17.00	
		CH 60	5300		16.19	17.00	
		CH 64	5320		16.22	17.00	
	802.11n-HT20	CH 52	5260	MCS0	16.38	17.00	99.60
		CH 56	5280		16.46	17.00	
		CH 60	5300		16.16	17.00	
		CH 64	5320		16.08	17.00	
	802.11n-HT40	CH 54	5270	MCS0	16.24	17.00	99.40
		CH 62	5310		15.25	16.00	
	802.11ac-VHT20	CH 52	5260	MCS0	16.51	17.00	99.60
		CH 56	5280		16.51	17.00	
		CH 60	5300		16.20	17.00	
		CH 64	5320		16.10	17.00	
	802.11ac-VHT40	CH 54	5270	MCS0	16.50	17.00	99.40
		CH 62	5310		15.65	16.00	
	802.11ac-VHT80	CH 58	5290	MCS0	13.88	14.00	98.90



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN ANT 1+2	802.11a	CH 100	5500	6Mbps	14.83	15.00	99.80
		CH 116	5580		14.76	15.00	
		CH 124	5620		14.83	15.00	
		CH 132	5660		14.78	15.00	
		CH 140	5700		14.58	15.00	
		CH 144	5720		14.73	15.00	
	802.11n-HT20	CH 100	5500	MCS0	14.50	15.00	99.60
		CH 116	5580		14.64	15.00	
		CH 124	5620		14.58	15.00	
		CH 132	5660		14.49	15.00	
		CH 140	5700		14.42	15.00	
		CH 144	5720		14.62	15.00	
	802.11n-HT40	CH 102	5510	MCS0	14.62	15.00	99.40
		CH 110	5550		14.66	15.00	
		CH 126	5630		14.57	15.00	
		CH 134	5670		14.65	15.00	
		CH 142	5710		14.63	15.00	
	802.11ac-VHT20	CH 100	5500	MCS0	14.78	15.00	99.60
		CH 116	5580		14.82	15.00	
		CH 124	5620		14.74	15.00	
		CH 132	5660		14.74	15.00	
		CH 140	5700		14.45	15.00	
		CH 144	5720		14.82	15.00	
	802.11ac-VHT40	CH 102	5510	MCS0	14.83	15.00	99.40
		CH 110	5550		14.83	15.00	
		CH 126	5630		14.66	15.00	
		CH 134	5670		14.80	15.00	
		CH 142	5710		14.78	15.00	
	802.11ac-VHT80	CH 106	5530	MCS0	14.80	15.00	98.90
		CH 122	5610		14.67	15.00	
		CH 138	5690		14.68	15.00	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN ANT 1+2	802.11a	CH 149	5745	MCS0	14.79	15.50	99.90
		CH 157	5785		14.90	15.50	
		CH 165	5825		14.96	15.50	
	802.11n-HT20	CH 149	5745	MCS0	15.04	15.50	99.60
		CH 157	5785		14.87	15.50	
		CH 165	5825		14.79	15.50	
	802.11n-HT40	CH 151	5755	MCS0	14.90	15.50	99.40
		CH 159	5795		14.88	15.50	
	802.11ac-VHT20	CH 149	5745	MCS0	15.07	15.50	99.60
		CH 157	5785		14.91	15.50	
		CH 165	5825		14.87	15.50	
	802.11ac-VHT40	CH 151	5755	MCS0	14.93	15.50	99.40
		CH 159	5795		15.03	15.50	
	802.11ac-VHT80	CH 155	5775	MCS0	14.96	15.50	98.90

**<2.4GHz Bluetooth>****General Note:**

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The duty factor is selected theoretical 83.3% perform Bluetooth SAR testing.

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	5.62	4.52	4.52
	CH 39	2441	5.74	4.72	4.69
	CH 78	2480	5.45	4.41	4.43
Tune-up Limit			6	6	6

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			GFSK	
LE	CH 00	2402	5.72	
	CH 19	2440	5.85	
	CH 39	2480	5.69	
Tune-up Limit			6	



## **12. SAR Test Results**

**General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$
  - $\leq 0.6 \text{ W/kg}$  or  $1.5 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between  $100 \text{ MHz}$  and  $200 \text{ MHz}$
  - $\leq 0.4 \text{ W/kg}$  or  $1.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200 \text{ MHz}$
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8 \text{ W/kg}$ .
4. Base on both WLAN Ant 1 and WLAN Ant 2 has the same output power, antenna type and antenna gain; therefore the WLAN SAR test results are employed for antenna 1 and antenna 2.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ .
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2 \text{ W/kg}$ , SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4 \text{ W/kg}$ , SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8 \text{ W/kg}$  or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8 \text{ W/kg}$ , SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2 \text{ W/kg}$  or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6 \text{ W/kg}$  and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

**12.1 Body SAR****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	6	2437	17.19	17.00	0.957	100	1.000	0.19	0.586	0.561
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	6	2437	17.19	17.20	1.002	100	1.000	-0.15	0.752	0.754
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	1	2412	16.85	17.20	1.084	100	1.000	-0.11	0.444	0.481
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	11	2462	15.40	16.00	1.148	100	1.000	-0.15	0.650	0.746
	WLAN2.4GHz	802.11b 1Mbps	Left Side	5mm	6	2437	17.19	17.00	0.957	100	1.000	-0.11	0.067	0.064
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5mm	6	2437	17.19	17.00	0.957	100	1.000	-0.04	0.335	0.321
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	6	2437	17.19	17.00	0.957	100	1.000	0.11	0.421	0.403
02	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	5mm	6	2437	17.19	17.00	0.957	100	1.000	0.14	0.298	0.285
	WLAN5GHz	802.11n-HT40 MCS0	Front	5mm	54	5270	16.44	17.00	1.138	99.4	1.006	-0.07	0.578	0.661
	WLAN5GHz	802.11n-HT40 MCS0	Back	5mm	54	5270	16.44	17.00	1.138	99.4	1.006	0.11	0.694	0.794
	WLAN5GHz	802.11n-HT40 MCS0	Back	5mm	62	5310	13.18	13.50	1.076	99.4	1.006	-0.02	0.718	0.778
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	5mm	54	5270	16.44	17.00	1.138	99.4	1.006	-0.04	0.041	0.047
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	5mm	54	5270	16.44	17.00	1.138	99.4	1.006	-0.07	0.576	0.659
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	5mm	54	5270	16.44	17.00	1.138	99.4	1.006	0.11	0.312	0.357
03	WLAN5GHz	802.11n-HT40 MCS0	Bottom Side	5mm	54	5270	16.44	17.00	1.138	99.4	1.006	-0.09	0.163	0.187
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	5mm	138	5690	14.84	15.00	1.038	98.9	1.011	-0.01	0.697	0.731
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	5mm	106	5530	12.41	12.50	1.021	98.9	1.011	-0.09	0.430	0.444
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	5mm	138	5690	14.84	15.00	1.038	98.9	1.011	0.16	0.650	0.682
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	5mm	138	5690	14.84	15.00	1.038	98.9	1.011	-0.06	0.063	0.066
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	5mm	138	5690	14.84	15.00	1.038	98.9	1.011	-0.03	0.607	0.637
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	5mm	138	5690	14.84	15.00	1.038	98.9	1.011	-0.04	0.210	0.220
04	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	5mm	138	5690	14.84	15.00	1.038	98.9	1.011	-0.16	0.226	0.237
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	5mm	155	5775	15.12	15.50	1.091	98.9	1.011	-0.05	0.642	0.708
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	5mm	155	5775	15.12	15.50	1.091	98.9	1.011	0.12	0.672	0.742
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	5mm	155	5775	15.12	15.50	1.091	98.9	1.011	-0.12	0.053	0.058
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	5mm	155	5775	15.12	15.50	1.091	98.9	1.011	-0.11	0.601	0.663
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	5mm	155	5775	15.12	15.50	1.091	98.9	1.011	0.17	0.220	0.243
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	5mm	155	5775	15.12	15.50	1.091	98.9	1.011	-0.03	0.269	0.297

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	Bluetooth	1Mbps	Front	5mm	39	2441	5.74	6.00	1.062	-0.11	0.034	0.036
	Bluetooth	1Mbps	Back	5mm	39	2441	5.74	6.00	1.062	-0.09	0.036	0.038
	Bluetooth	1Mbps	Back	5mm	00	2402	5.62	6.00	1.091	0.12	0.038	0.041
	Bluetooth	1Mbps	Back	5mm	78	2480	5.45	6.00	1.135	0.14	0.071	0.081
	Bluetooth	1Mbps	Left Side	5mm	39	2441	5.74	6.00	1.062	0.17	0.003	0.003
	Bluetooth	1Mbps	Right Side	5mm	39	2441	5.74	6.00	1.062	0.1	0.013	0.014
	Bluetooth	1Mbps	Top Side	5mm	39	2441	5.74	6.00	1.062	0.16	0.020	0.021
	Bluetooth	1Mbps	Bottom Side	5mm	39	2441	5.74	6.00	1.062	-0.09	0.028	0.030



### 13. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Support
1	WLAN Antenna 1 + WLAN Antenna 2	Yes
2	WLAN Antenna 1 + Bluetooth Antenna 2	Yes

**General Note:**

1. For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis is performed on the twice summation in SISO mode SAR results.
2. WLAN and Bluetooth share the same antenna 2, and cannot transmit simultaneously.
3. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii) SPLSR =  $(\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where  $(x1, y1, z1)$  and  $(x2, y2, z2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If SPLSR  $\leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

#### 13.1 Body Exposure Conditions

Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)	3+5 Summed 1g SAR (W/kg)
	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 2				
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
Front	0.561	0.561	0.731	0.731	0.036	<b>1.122</b>	<b>0.597</b>	<b>1.462</b>	<b>0.767</b>
Back	0.754	0.754	0.794	0.794	0.081	<b>1.508</b>	<b>0.835</b>	<b>1.588</b>	<b>0.875</b>
Left side	0.064	0.064	0.066	0.066	0.003	<b>0.128</b>	<b>0.067</b>	<b>0.132</b>	<b>0.069</b>
Right side	0.321	0.321	0.663	0.663	0.014	<b>0.642</b>	<b>0.335</b>	<b>1.326</b>	<b>0.677</b>
Top side	0.403	0.403	0.357	0.357	0.021	<b>0.806</b>	<b>0.424</b>	<b>0.714</b>	<b>0.378</b>
Bottom side	0.285	0.285	0.297	0.297	0.030	<b>0.570</b>	<b>0.315</b>	<b>0.594</b>	<b>0.327</b>



### 13.2 Enhanced Energy Coupling

**Note:**

1. Pre KDB447498 D01v06, The probe tip distance to the phantom should be positioned at a distance of half the probe tip diameter, rounded to the nearest mm.
2. Percent Change = [Measured Peak Reported SAR - Initial Peak Reported SAR] / Initial Peak Reported SAR] \*100%
3. Pre KDB447498 D01v06, when there is more than 15% variation in the single-point measurements at each position, more measurements are required to ensure a representative high range value is recorded. The highest of the single-point SAR values, adjusted for tune-up tolerance, should be reported for each position. When the highest measured single point SAR among all positions is 25% greater than that measured with the device positioned at Initial from the phantom, a complete 1-g SAR evaluation is required for that test configuration at the device position producing the highest single-point SAR.

Test configuration	Band	Antenna-to-person		Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Peak SAR 1g (W/kg)	Peak Reported SAR(W/kg)	Percent Change
		distance(mm)							
Front	WLAN2.4GHz	Initial	5mm	17.19	17.20	1.002	1.150	1.153	-
		Step 1	10mm	17.19	17.20	1.002	0.460	0.461	-59.91
Back	WLAN2.4GHz	Initial	5mm	17.19	17.20	1.002	1.450	1.453	-
		Step 1	10mm	17.19	17.20	1.002	0.456	0.457	-68.48
Left Side	WLAN2.4GHz	Initial	5mm	17.19	17.20	1.002	0.123	0.123	-
		Step 1	10mm	17.19	17.20	1.002	0.050	0.050	-58.33
Right Side	WLAN2.4GHz	Initial	5mm	17.19	17.20	1.002	0.735	0.737	-
		Step 1	10mm	17.19	17.20	1.002	0.260	0.261	-64.73
Top Side	WLAN2.4GHz	Initial	5mm	17.19	17.20	1.002	0.910	0.912	-
		Step 1	10mm	17.19	17.20	1.002	0.320	0.321	-64.73
Bottom Side	WLAN2.4GHz	Initial	5mm	17.19	17.20	1.002	0.526	0.527	-
		Step 1	10mm	17.19	17.20	1.002	0.229	0.230	-56.60

Test configuration	Band	Antenna-to-person		Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Peak SAR 1g (W/kg)	Peak Reported SAR(W/kg)	Percent Change
		distance(mm)							
Front	WLAN5GHz	Initial	5mm	16.44	17.00	1.138	2.190	2.491	-
		Step 1	10mm	16.44	17.00	1.138	0.320	0.364	-85.38
Back	WLAN5GHz	Initial	5mm	16.44	17.00	1.138	2.180	2.480	-
		Step 1	10mm	16.44	17.00	1.138	0.343	0.390	-84.27
Left Side	WLAN5GHz	Initial	5mm	16.44	17.00	1.138	0.187	0.213	-
		Step 1	10mm	16.44	17.00	1.138	0.033	0.038	-81.90
Right Side	WLAN5GHz	Initial	5mm	16.44	17.00	1.138	1.630	1.854	-
		Step 1	10mm	16.44	17.00	1.138	0.281	0.320	-82.70
Top Side	WLAN5GHz	Initial	5mm	16.44	17.00	1.138	0.712	0.810	-
		Step 1	10mm	16.44	17.00	1.138	0.168	0.191	-76.42
Bottom Side	WLAN5GHz	Initial	5mm	16.44	17.00	1.138	0.514	0.585	-
		Step 1	10mm	16.44	17.00	1.138	0.132	0.150	-74.58

Test configuration	Band	Antenna-to-person		Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Measured Peak SAR 1g (W/kg)	Peak Reported SAR(W/kg)	Percent Change
		distance(mm)							
Front	Bluetooth	Initial	5mm	5.45	6.00	1.135	0.066	0.075	-
		Step 1	10mm	5.45	6.00	1.135	0.030	0.034	-57.50
Back	Bluetooth	Initial	5mm	5.45	6.00	1.135	0.149	0.169	-
		Step 1	10mm	5.45	6.00	1.135	0.059	0.067	-60.59
Left Side	Bluetooth	Initial	5mm	5.45	6.00	1.135	0.005	0.006	-
		Step 1	10mm	5.45	6.00	1.135	0.003	0.003	-70.00
Right Side	Bluetooth	Initial	5mm	5.45	6.00	1.135	0.029	0.033	-
		Step 1	10mm	5.45	6.00	1.135	0.012	0.014	-53.33
Top Side	Bluetooth	Initial	5mm	5.45	6.00	1.135	0.038	0.043	-
		Step 1	10mm	5.45	6.00	1.135	0.016	0.018	-55.00
Bottom Side	Bluetooth	Initial	5mm	5.45	6.00	1.135	0.045	0.051	-
		Step 1	10mm	5.45	6.00	1.135	0.017	0.019	-62.00

Test Engineer : Kurt Liu, Bevis Chang, San Lin and Tom Jiang



## 14. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacturer's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b)  $k$  is the coverage factor

**Table 14.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
<b>Test Sample Related</b>							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						11.4%	11.4%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						22.9%	22.7%

Table 14.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	7.0	N	1	1	1	7.0	7.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
<b>Test Sample Related</b>							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						12.8%	12.7%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						25.5%	25.4%

Table 14.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



## **15. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.