

# **FCC SAR Test Report**

# FCC ID:TX2-RTL8822BE

**Project No.** : 1711C206A

**Equipment**: 802.11a/b/g/n/ac RTL8822BE Combo module

Test Model : RTL8822BE

**Applicant**: Realtek Semiconductor Corp.

Address: No. 2, Innovation Road II, Hsinchu Science Park,

Hsinchu 300, Taiwan

Date of Receipt: Dec. 10, 2017

**Date of Test** : Dec. 18, 2017 ~ Dec. 21, 2017

Issued Date : Jan. 10, 2018 Tested by : BTL Inc.

Rot Liano

PREPARED BY : (Rot Liang)

Seven h

**APPROVED BY**: (Steven Lu)

# BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Report No.: BTL-FCC SAR-2-1711C206A



#### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

#### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: BTL-FCC SAR-2-1711C206A



Table of Contents	Page
1 . GENERAL SUMMARY	6
2 . RF EMISSIONS MEASUREMENT	7
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 STATEMENT OF COMPLIANCE	8
3.2 GENERAL DESCRIPTION OF EUT	10
3.3 LABORATORY ENVIRONMENT	12
3.4 MAIN TEST INSTRUMENTS	13
4 .SAR MEASUREMENTS SYSTEM CONFIGURATION	14
4.1 SAR MEASUREMENT SET-UP	14
4.2 DASY5E-FIELDPROBESYSTEM	15
5 . SYSTEM VERIFICATION PROCEDURE	23
5.1 TISSUE VERIFICATION	23
5.2 SYSTEM CHECK	25
5.3 SYSTEM CHECK PROCEDURE	25
6 .SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	26
6.1 SAR MEASUREMENT VARIABILITY	26
7 .OPERATIONAL CONDITIONS DURING TEST	27
7.1 SAR TEST CONFIGURATION	27
7.1.1 WIFI TEST CONFIGURATION	27
7.2 TEST POSITION 7.2.1 BODY TEST CONFIGURATION	29 29
8 .TEST RESULT	34
8.1 CONDUCTED POWER RESULTS 8.2 SAR TEST RESULTS	34 42
8.3 MULTIPLE TRANSMITTER EVALUATION	42
APPENDIX	53
1. TEST LAYOUT	53
Appendix A. SAR Plots of System Verification Appendix B. SAR Plots of SAR Measurement	

Report No.: BTL-FCC SAR-2-1711C206A



# **Table of Contents**

**Page** 

Appendix C. Calibration Certificate for Probe and Dipole Appendix D. Photographs of the Test Set-Up

Report No.: BTL-FCC SAR-2-1711C206A



# **REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCC SAR-2-1711C206A	Original Issue	Jan. 10, 2018

Report No.: BTL-FCC SAR-2-1711C206A



# 1. GENERAL SUMMARY

Equipment	802.11a/b/g/n/ac RTL8822BE Combo module
Brand Name	REALTEK
Test Model	RTL8822BE
Manufacturer	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
Standard(s)	<b>ANSI Std C95.1-1992</b> Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)
	IEEE Std 1528-2013Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
	KDB616217 D04 SAR for laptop and tablets v01r02 KDB447498 D01 General RF Exposure Guidance v06 KDB248227 D01 802. 11 Wi-Fi SAR v02r02 KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 KDB865664 D02 SAR Reporting v01r02 KDB690783 D01 SAR Listings on Grants v01r03

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCC SAR-2-1711C206A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: BTL-FCC SAR-2-1711C206A



#### 2. RF EMISSIONS MEASUREMENT

#### 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **SAR room** at the location of No.3, Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792

# 2.2 MEASUREMENT UNCERTAINTY

Note:Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz,when the highest measured1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described inIEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

Report No.: BTL-FCC SAR-2-1711C206A



#### 3. GENERAL INFORMATION

#### 3.1STATEMENT OF COMPLIANCE

#### **Tablet Mode**

Equipment Class	Mode	Highest Body (0cm) SAR-1g(W/kg)	
DTS	2.4G WLAN	1.21	
סוט	BT	0.00	
	5.3G WLAN	1.11	
NII	5.5G WLAN	1.07	
	5.8G WLAN	1.28	
Highest Simultaneous Transmission		Highest	
inghest sin	SAR	Body (0cm)	
	SAK	SAR-1g(W/kg)	
2	.4G WLAN+BT	0.56	
5G WLAN+BT		0.58	
2.4G WLAI	N Main+2.4G WLAN Aux	1.77	
5G WLAN Main+5G WLAN Aux		1.35	

## Note:

- 1) \* For body-worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 0mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.
- 2) The device is in compliance with Specific Absorption Rate(SAR)for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.
- 3) the SPLSR is 0.014 under 0.04 of the WiFi 2.4G, the Simultaneous Transmission SAR is not required.
- 4) Tablet with built-in NFC functions does not require separate SAR testing.

Report No.: BTL-FCC SAR-2-1711C206A



#### **NB Mode**

Equipment Class	Mode	Highest Body(0cm) SAR-1g(W/kg)	
DTS	2.4G WLAN	0.17	
פוע	ВТ	0.00	
	5.3G WLAN	0.25	
NII	5.5G WLAN	0.17	
	5.8G WLAN	0.16	
Highest Simultaneous Transmission		Highest	
Highest Sill		Body (0cm)	
SAR		SAR-1g(W/kg)	
2	.4G WLAN+BT	0.17	
5G WLAN+BT		0.15	
2.4G WLAI	N Main+2.4G WLAN Aux	0.17	
5G WLAN Main+5G WLAN Aux		0.40	

# Note:

- 1) \* For body-worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 0mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.
- 2) The device is in compliance with Specific Absorption Rate(SAR)for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.
- 3) Tablet with built-in NFC functions does not require separate SAR testing.

Report No.: BTL-FCC SAR-2-1711C206A



# 3.2 GENERAL DESCRIPTION OF EUT

Equipment	802.11a/b/g/n/ac RTL8822BE Combo module					
Test Model	RTL8822BE					
Modulation	WiFi(DSSS/OFDM),BT(GFSK/ π /4-DQPSK/8-DPSK)					
	Band	TX (MHz) F		X (MHz)		
	Bluetooth		2400~2483.5			
O	2.4G WIFI 2400~2480					
Operation Frequency	5G WIFI Band I		5150-5250			
Range(s)	5G WIFI Band II		5250-5350			
	5G WIFI Band III		5470-5725			
	5G WIFI Band IV		5725-5850			
	Band		Channel			
	2.4G WIFI		1-6-11			
Test Channels	5G WiFi Band I		36-40-44-48			
(low-mid-high):	5G WiFi Band II		52-56-60-64			
	5G WiFi Band III		)8-112-116-132- <sup>-</sup>			
	5G WiFi Band IV	14	9-153-157-161-	165		
	BT	0-39-78				
	Ant status	Band	Ant Gain(dBi)	Vendor		
		2.4G WIFI / BT	1.68			
	Main	5.2G	-0.92	Shenzhen South		
	P/N:N12-4149-R0A	5.3G	-0.94			
	(NDX)	5.5G	1.07			
		5.8G	1.43	Star Technology		
		2.4G WIFI / BT	2.51	Co., LTD		
	Aux P/N:N12-4150-R0A	5.2G 5.3G	0.45 2			
	(NDX)	5.5G	2.36			
Antenna Gain	(NDX)	5.8G	2.28	•		
Antenna Gain		2.4G WIFI / BT	0.78			
	Main	5.2G	-0.5	1		
	P/N:ATC1010-BL001	5.3G	-0.5	1		
	B72RA	5.5G	-0.34	1		
	(ATC)	5.8G	-0.94	Advanced		
		2.4G WIFI / BT	-1.97	Technology &		
	Aux	5.2G	0.76	Communications		
	P/N:ATC1010-BL001	5.3G	0.76	1		
	B73RA	5.5G	1.12	1		
	(ATC)	5.8G	1.12			

Note: 1. Implementation in the following platform

Model number: TP00098A Product name: Tablet PC

2. Tablet supports NFC function.

Report No.: BTL-FCC SAR-2-1711C206A



Other Information				
	Model	L17M2P51		
Pottony1	Capacitance	7.68 Vdc		
Battery1	Rated Voltage	5080 mAh		
	Manufacturer	SIMPLO TECHNOLOGY CO. LTD.		
	Model	L17M2P52		
Potton/2	Capacitance	7.68 Vdc		
Battery2	Rated Voltage	5080 mAh		
	Manufacturer	SIMPLO TECHNOLOGY CO. LTD.		
	Model	L17C2P51		
Dottom	Capacitance	7.68 Vdc		
Battery3	Rated Voltage	5080 mAh		
	Manufacturer	CELXPERT ENERGY CORP		

Report No.: BTL-FCC SAR-2-1711C206A



# 3.3LABORATORY ENVIRONMENT

Temperature	Min. = 18°C, Max. = 25°C		
Relative humidity	Min. = 30%, Max. = 70%		
Ground system resistance	< 0.5Ω		
Ambient noise is checked and found very low and in compliance with requirement of standards			

Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.

Report No.: BTL-FCC SAR-2-1711C206A



#### 3.4 MAIN TEST INSTRUMENTS

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1390	Sep. 15, 2017	1 Year
2	E-field Probe	Speag	EX3DV4	7396	May. 25, 2017	1 Year
3	System Validation Dipole	Speag	D2450V2	919	Sep. 28, 2015	3 Years
4	System Validation Dipole	Speag	D5GHzV2	1160	Oct. 05, 2015	3 Years
5	ELI4 Phantom	Speag	ELI4 Phantom V5.0	1222	N/A	N/A
6	Power Amplifier	Mini-Circuits	ZHL-42W+	QA1333003	N/A	N/A
7	Power Amplifier	Mini-Circuits	ZVE-8G+	520701341	N/A	N/A
8	ENA Network Analyzer	Agilent	E5071C	MY46102965	Mar. 26, 2017	1 Year
9	MXG Analog Signal Generator	Agilent	N5181A	MY49060477	Jun. 30, 2017	1 Year
10	P-series power meter	Agilent	N1911A	MY45100473	Aug. 20, 2017	1 Year
11	wideband power sensor	Agilent	N1921A	MY51100041	Aug. 20, 2017	1 Year
12	power Meter	Anritsu	ML2495A	1128009	Mar. 26, 2017	1 Year
13	Pulse Power Sensor	Anritsu	MA 2411B	1027500	Mar. 26, 2017	1 Year
14	Dielectric Assessment Kit	Speag	DAK-3.5	1226	N/A	N/A
15	Dual directional coupler	Woken	TS-PCC0M-05	107090019	Mar. 09, 2017	1 Year

#### Note:

- 1." N/A" denotes no model name, serial No. or calibration specified.
- 1) Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement;
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within  $5\Omega$  from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a short block performed before measuring liquid parameters.

Report Format Version: 0.0.1

Report No.: BTL-FCC SAR-2-1711C206A




#### 4.SAR MEASUREMENTS SYSTEM CONFIGURATION

# **4.1SAR MEASUREMENT SET-UP**

The DASY5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- 4. A unit to operate the optical surface detector which is connected to the EOC.
- 5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- TheDASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7
- 7. DASY5 software and SEMCAD data evaluation software.
- 8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- 9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
- 10. The device holder for handheld mobile phones.
- 11. Tissue simulating liquid mixed according to the given recipes.
- 12. System validation dipoles allowing to validate the proper functioning of the system.

# 4.1.1Test Setup Layout

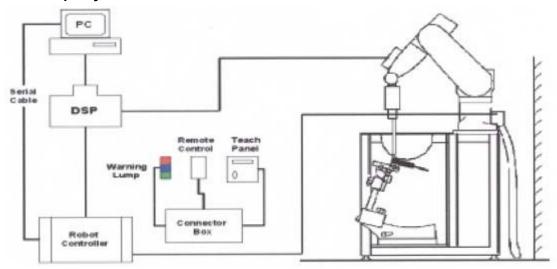

Report No.: BTL-FCC SAR-2-1711C206A



# 4.2DASY5E-FIELDPROBESYSTEM

The SAR measurementswere conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

# **4.2.1EX3DV4 PROBE SPECIFICATION**

Construction	Symmetricaldesign with triangular coreInterleavedsensorsBuilt-inshieldingagainst static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibrationservice available
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μW/g to > 100 mW/g Linearity:± 0.2dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm





**EX3DV4 E-field Probe** 

Report No.: BTL-FCC SAR-2-1711C206A



#### 4.2.2E-FIELD PROBE CALIBRATION

Eachprobeiscalibratedaccordingtoadosimetricassessmentprocedurewithaccuracybetterthan±10 %. The sphericalisotropywas evaluatedandfoundtobebetterthan±0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\mathbf{SAR} = \mathbf{C} \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$ =Exposure time(30 seconds),

C =Heat capacityoftissue (brain or muscle), ΔT=Temperature increase due to RF exposure.

Or SAR = 
$$\frac{|E|^2 \sigma}{\rho}$$

Where:σ=Simulatedtissueconductivity, ρ=Tissue density (kg/m3).

Report No.: BTL-FCC SAR-2-1711C206A



# **4.2.3OTHER TEST EQUIPMENT**

# 4.2.3.1. Device Holder for Transmitters

**Construction:** Simple buteffective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is light weight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

# 4.2.3.2 Phantom

Model	ELI4 Phantom
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
ShellThickness	2±0.1 mm
Filling Volume	Approx. 30 liters
Dimensions	Length: 600 mm ; Width: 190mm Height: adjustable feet
Aailable	Special



Report No.: BTL-FCC SAR-2-1711C206A



#### 4.2.4SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm 5$  %.

The "surface check" measurement tests the optical surface detection system of the DASY5 systemby repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the twosystems and the standard deviation of the detection repeatability. Air bubbles or refraction in theliquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm$  0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm$  30°.)

#### Area Scan

The "area scan" measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension( $\leq$  2GHz), 12 mm inx- and y- dimension(2-4 GHz) and 10mm in x- and y- dimension(4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

#### Zoom Scan

A "zoom scan" measures the field in a volume around the 2D peak SAR value acquired in the previous "coarse" scan. This is a fine grid with maximum scan spatial resolution:  $\Delta$  x<sub>zoom</sub>,  $\Delta$ y<sub>zoom</sub>  $\leq$  2GHz - $\leq$ 8mm, 2-4GHz - $\leq$ 5 mm and 4-6 GHz- $\leq$ 4mm;  $\Delta$ z<sub>zoom</sub>  $\leq$ 3GHz - $\leq$ 5 mm, 3-4 GHz- $\leq$ 4mm and 4-6GHz- $\leq$ 2mm where the robot additionally moves the probe along the z-axis away from thebottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.)are shown in table form form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAMphantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending inthe field strength – also show the liquid depth.

Report No.: BTL-FCC SAR-2-1711C206A 18 / 54



The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

	Maximun Area	Maximun Zoom	Maximun Zoom Scan spatial resolution			Minimum
Frequency	Scan	Scan spatial	Uniform Grid	Gra	Graded Grad	
rrequency	resolution (Δx <sub>area</sub> , Δy <sub>area</sub> )	resolution $(\Delta x_{Zoom}, \Delta y_{Zoom})$	Δz <sub>Zoom</sub> (n)	Δz <sub>Zoom</sub> (1)*	Δz <sub>Zoom</sub> (n>1)*	volume (x,y,z)
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	$\leq 1.5^*\Delta z_{Zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5*Δz <sub>Zoom</sub> (n-1)	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	$\leq 1.5^*\Delta z_{Zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	$\leq 1.5^*\Delta z_{Zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5*∆z <sub>Zoom</sub> (n-1)	≥22mm

#### 4.2.5SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of  $5 \times 5 \times 7$  points( with 8mm horizontal resolution) or  $7 \times 7 \times 7$  points( with 5mm horizontal resolution) or  $8 \times 8 \times 7$  points( with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### **Extrapolation**

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik,p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

# Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

## Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

# **Advanced Extrapolation**

DASY5 uses the advanced extrapolation option which is able to compansate boundary effects on E-field probes.

19 / 54

Report No.: BTL-FCC SAR-2-1711C206A



#### 4.2.6DATA STORAGE AND EVALUATION

# 4.2.5.1Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (inmicrovolt readings from the probe sensors), together with all necessary software parameters for thedata evaluation (probe calibration data, liquid parameters and device frequency and modulation data) inmeasurement files with the extension ".DAE4". The software evaluates the desired unit and format foroutput each time the data is visualized or exported. This allows verification of the complete softwaresetup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, theparameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on theselected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are notavailable in certain situations or show meaningless results, e.g., a SAR output in a lossless media willalways be zero. Raw data can also be exported to perform the evaluation with other software packages.

Report No.: BTL-FCC SAR-2-1711C206A 20 / 54



# 4.2.7Data Evaluation by SEMCAD

The SEMCADs of tware automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: Sensitivity Normi,  $a_{i0}$ ,  $a_{i1}$ ,  $a_{i2}$ 

Conversion factor ConvF<sub>i</sub>

Diode compression point Dcp<sub>i</sub>

Device Frequency f parameters:

Crestfactor cf

Media parameters: Conductivity

Density

These parametersmust be setcorrectly in the software. They can be found in the component documents ortheycanbeimported into thesoftware fromtheconfiguration files issued forthe DASY5 components. Inthedirectmeasuring mode of the multimeter option, the parameters of the actual systemsetup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

Thefirst stepoftheevaluation is alinearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

With  $V_i$ = compensated signal of channeli (i = x,y,z)

 $U_i$ = input signal of channel i (i = x, y,z)

Cf=crestfactorofexciting field (DASY parameter)

 $dcp_i$ =diode compressionpoint (DASYparameter)

Report No.: BTL-FCC SAR-2-1711C206A



From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$ 

H-field probes:  $H_i = (V_i)^{1/2}$  (  $a_{i0} + a_{i1}f + a_{i2}f^2$ )/ f

With  $V_i$ = compensated signal of channeli (i = x,y,z)

 $Norm_i$ = sensor sensitivity of channel i ( i = x, y,z )

[mV/(V/m)<sup>2</sup>]for E-field Probes

ConvF = sensitivity enhancement in solution

aij=sensorsensitivityfactorsfor H-field probes

f=carrier frequency [GHz]

E<sub>i</sub>=electric fieldstrength of channel i in V/m

H<sub>i</sub>= magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_X^2 + E_Y^2 + E_Z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

SAR= 
$$(E_{tot})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR=local specific absorption rateinmW/g

 $E_{tot}$ =total field strength in V/m

=conductivity in[mho/m]or[Siemens/m]

=equivalenttissuedensitying/cm<sup>3</sup>

Note thatthedensity isnormally setto 1(or1.06),toaccount for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2/3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

With  $P_{pwe}$ = equivalent power density of a plane wave in mW/cm<sup>2</sup>

E<sub>tot</sub>=total field strength in V/m

 $H_{tot} \! = \! total magnetic field strength in A/m$ 

Report No.: BTL-FCC SAR-2-1711C206A



# 5. SYSTEM VERIFICATION PROCEDURE

#### **5.1 TISSUE VERIFICATION**

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the dielectic parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm$  5% of the target values.

The following materials are used for producing the tissue-equivalent materials.

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono- hexylether
Body 750	0.2	-	0.2	8.0	48.8	-	50.0	-
Body 835	0.2	-	0.2	0.9	48.5	-	50.2	-
Body 1750	-	31.0	-	0.2	-	-	68.8	-
Body 1900	-	29.5	-	0.3	-	1	70.2	-
Body 2000	-	30.0	-	0.2	-	1	69.8	-
Body 2450	-	31.4	-	0.1	ı	ı	68.5	-
Body 2600	-	31.8	-	0.1	-	1	68.1	-
Body 5G	-	ı	-	-	ı	10.7	78.6	10.7

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy)ethanol] Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Report No.: BTL-FCC SAR-2-1711C206A 23 / 54



	Tissue Verification											
Tissue	Frequency	Liquid Temp.	Conductivity	Permittivity	Targeted Conductivity	Targeted Permittivity	Deviation Conductivity	Deviation Permittivity	Date			
Type	(MHz)	(℃)	(σ)	(εr)	(σ)	(εr)	(σ) (%)	(εr) (%)				
Body	2450	22.4	1.990	51.538	1.95	52.7	2.05	-2.20	Dec. 21, 2017			
Body	5200	22.3	5.233	49.383	5.30	49.0	-1.26	0.78	Dec. 18, 2017			
Body	5300	22.3	5.373	49.215	5.42	48.9	-0.87	0.64	Dec. 18, 2017			
Body	5600	22.6	5.844	48.635	5.77	48.5	1.28	0.28	Dec. 19, 2017			
Body	5800	22.5	6.104	48.140	6.00	48.2	1.73	-0.12	Dec. 20, 2017			

#### Note:

- 1)The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2)KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3)The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

Report No.: BTL-FCC SAR-2-1711C206A



#### **5.2 SYSTEM CHECK**


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.

System Check	Frequency (MHz)	Date	Targeted SAR-1g (W/kg)	Measured SAR-1g (W/kg)	normalized SAR-1g (W/kg)	Deviation (%)	Dipole S/N
Body	2450	Dec. 21, 2017	51.10	12.40	49.60	-2.94	919
Body	5200	Dec. 18, 2017	77.80	7.58	75.80	-2.57	1160
Body	5300	Dec. 18, 2017	78.40	7.47	74.70	-4.72	1160
Body	5600	Dec. 19, 2017	81.50	8.06	80.60	-1.10	1160
Body	5800	Dec. 20, 2017	78.30	7.45	74.50	-4.85	1160

#### **5.3 SYSTEM CHECK PROCEDURE**

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 5GHz) or 100mW(above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system(±10 %).

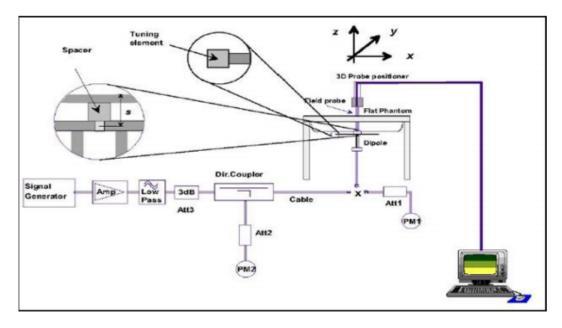

Report No.: BTL-FCC SAR-2-1711C206A



#### **6.SAR MEASUREMENT VARIABILITY AND UNCERTAINTY**

#### **6.1SAR MEASUREMENT VARIABILITY**

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq$  0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeatedmeasurements is > 1.20.

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 8.2.

Report No.: BTL-FCC SAR-2-1711C206A 26 / 54



#### 7.OPERATIONAL CONDITIONS DURING TEST

#### 7.1SAR TEST CONFIGURATION

#### 7.1.1 WIFI TEST CONFIGURATION

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal.

#### 2.4G

Mode	802.11b	802.11g	802.11n HT20/40						
Duty cycle		100%							
Crest factor		1							

#### 5G

Mode	802.11a	802.11n HT20/40	802.11ac VHT20/40/80
Duty cycle		100%	
Crest factor		1	

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227 D01 are applied.

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227 D01 are applied.

#### 7.1.1.1 2.4G SAR TEST REQUIREMENTS

## **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

# 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

#### **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, each standalone And frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

27 / 54

Report No.: BTL-FCC SAR-2-1711C206A



#### 7.1.1.2 5G SAR TEST REQUIREMENTS

#### **♦ U-NII-1 and U-NII-2A Band**

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq$  1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq$  1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

#### **♦ U-NII-2C, U-NII-3 Bands**

The frequency range covered by these bands is 380 MHz (5.47 - 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 - 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, they must be considered for SAR testing. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels.11 When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

#### 7.1.1.3 OFDM TRANSMISSION MODE AND SAR TEST CHANNEL SELECTION

For the 2.4GHz and 5GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations(for example 802.11a,802.11n and 802.11ac,or 802.11g and 802.11n,with the same channel bandwidth, modulation, and data rate, etc.),the lower order 802.11 mode(i.e.802.11a then 802.11n and 802.11ac,or 802.11g then 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

Report No.: BTL-FCC SAR-2-1711C206A 28 / 54



#### 7.1.1.4 INITIAL TEST CONFIGURATION PROCEDURE

For OFDM, in both 2.4G and 5GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output powers is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output power will be the initial test configuration.

When the reported SAR is≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SARis evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurement.

#### 7.2 TEST POSITION

# 7.2.1 Body test configuration

The overall diagonal dimension of the display section of a tablet is 27.2cm>20cm,Per FCC KDB 616217,the back surface and edges of the tablet should be tested for SAR compliance with the Tablet touching the phantom.SAR evaluation for the front surface of tablet display screens are generally not necessary.

The SAR Exclusion Threshold in KDB 447498 D01can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned adjacent the phantom and the edge containing the antenna positioned perpendicular to the phantom.

#### SAR test reduction and exclusion guidance

(1)The SAR exclusion threshold for distances<50mm is defined by the following equation:

The test exclusions are applicable only when the minimum test separation distance is  $\leq$ 50mm and for transmission frequencies between 100MHz and 6GHz. When the minimum test separation distance is $\leq$ 5mm, a distance of 5mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

(2)The SAR exclusion threshold for distances>50mm is defined by the following equation, as illustrated in KDB 447498 D01 Appendix B:

a) at 100 MHz to 1500 MHz

[Power allowed at numeric Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f (MHz)/150)] mW

b) at >1500MHz and ≤6GHz


[Power allowed at numeric Threshold at 50 mm in step 1) + (test separation distance - 50 mm) ·10] mW

29 / 54

Report No.: BTL-FCC SAR-2-1711C206A



The location of the antenna inside EUT is as below:

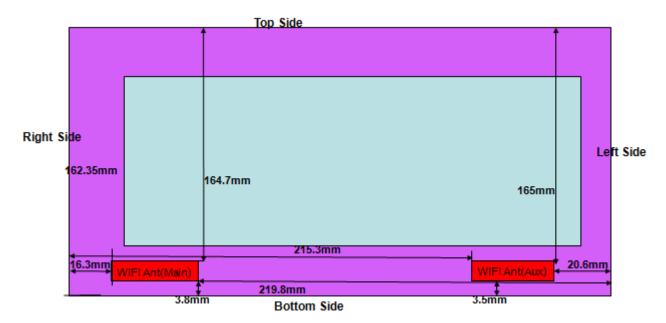

Rear View

Antenna	Front Face	Rear Face	Right Side	Left Side	Top Side	Bottom Side
WLAN Main	5mm	5mm	16.3mm	219.8mm	164.7mm	3.8mm
WLAN Aux	5mm	5mm	215.3mm	20.6mm	165mm	3.5mm

# Note:

1) Diversity antenna is used to improve the acceptance of performance of the main antenna, it does not have a transmitter function.

Report No.: BTL-FCC SAR-2-1711C206A



# The distance <50mm

WLAN Main\_Ant

Mode	Position	Pmax( dBm)*	Pmax(mW)	Distance( mm)	f(GHz)	Calculatio n Result	SAR Exclusion threshold	Test Requirement (Yes/No)
802.11b	Rear	16	39.81	5.00	2.462	12.49	3	Yes
802.11b	Right	16	39.81	16.30	2.462	3.83	3	Yes
802.11b	Bottom	16	39.81	3.80	2.462	16.44	3	Yes
802.11a (5.2G)	Rear	17	50.12	5.00	5.24	22.95	3	Yes
802.11a (5.2G)	Left	17	50.12	16.30	5.24	7.04	3	Yes
802.11a (5.2G)	Bottom	17	50.12	3.80	5.24	30.19	3	Yes
802.11a (5.3G)	Rear	17	50.12	5.00	5.32	23.12	3	Yes
802.11a (5.3G)	Left	17	50.12	16.30	5.32	7.09	3	Yes
802.11a (5.3G)	Bottom	17	50.12	3.80	5.32	30.42	3	Yes
802.11a (5.5G)	Rear	15	31.62	5.00	5.72	15.13	3	Yes
802.11a (5.5G)	Left	15	31.62	16.30	5.72	4.64	3	Yes
802.11a (5.5G)	Bottom	15	31.62	3.80	5.72	19.90	3	Yes
802.11a (5.8G)	Rear	15.5	35.48	5.00	5.825	17.13	3	Yes
802.11a (5.8G)	Left	15.5	35.48	16.30	5.825	5.25	3	Yes
802.11a (5.8G)	Bottom	15.5	35.48	3.80	5.825	22.54	3	Yes

Report No.: BTL-FCC SAR-2-1711C206A



# The distance <50mm

WLAN Aux Ant

WLAN A	JX_Ant							
Mode	Position	Pmax(d Bm)*	Pmax(mW)	Distance(m m)	f(GHz)	Calculation Result	SAR Exclusion threshold	Test Requirement (Yes/No)
ВТ	Rear	5	3.162	5	2.48	1.00	3	No
ВТ	Left	5	3.162	20.6	2.48	0.24	3	No
ВТ	Bottom	5	3.162	3.5	2.48	1.42	3	No
802.11b	Rear	16	39.81	5	2.462	12.49	3	Yes
802.11b	Left	16	39.81	20.6	2.462	3.03	3	Yes
802.11b	Bottom	16	39.81	3.5	2.462	17.85	3	Yes
802.11a (5.2G)	Rear	17	50.12	5	5.24	22.95	3	Yes
802.11a (5.2G)	Left	17	50.12	20.6	5.24	5.57	3	Yes
802.11a (5.2G)	Bottom	17	50.12	3.5	5.24	32.78	3	Yes
802.11a (5.3G)	Rear	17	50.12	5	5.32	23.12	3	Yes
802.11a (5.3G)	Left	17	50.12	20.6	5.32	5.61	3	Yes
802.11a (5.3G)	Bottom	17	50.12	3.5	5.32	33.03	3	Yes
802.11a (5.5G)	Rear	15	31.62	5	5.72	15.13	3	Yes
802.11a (5.5G)	Left	15	31.62	20.6	5.72	3.67	3	Yes
802.11a (5.5G)	Bottom	15	31.62	3.5	5.72	21.61	3	Yes
802.11a (5.8G)	Rear	15.5	35.48	5	5.825	17.13	3	Yes
802.11a (5.8G)	Left	15.5	35.48	20.6	5.825	4.16	3	Yes
802.11a (5.8G)	Bottom	15.5	35.48	3.5	5.825	24.47	3	Yes

Report No.: BTL-FCC SAR-2-1711C206A



# The distance >50mm

WLAN Main\_Ant

Mode	Position	f(GHz)	Power allowed at numeric Threshold at 50mm	Distance (mm)	Pmax(dBm)*	Pmax(mW)	SAR Exclusion Result	Test Requirement (Yes/No)
802.11b	Left	2.462	95.60	219.8	16	39.81	1793.60	No
802.11b	Тор	2.462	95.60	164.7	16	39.81	1242.60	No
802.11a(5.2G)	Left	5.24	65.53	219.8	17	50.12	1763.53	No
802.11a(5.2G)	Тор	5.24	65.53	164.7	17	50.12	1212.53	No
802.11a(5.3G)	Left	5.32	65.03	219.8	17	50.12	1763.03	No
802.11a(5.3G)	Тор	5.32	65.03	164.7	17	50.12	1212.03	No
802.11a(5.5G)	Left	5.72	62.72	219.8	15	31.62	1760.72	No
802.11a(5.5G)	Тор	5.72	62.72	164.7	15	31.62	1209.72	No
802.11a(5.8G)	Left	5.825	62.15	219.8	15.5	35.48	1760.15	No
802.11a(5.8G)	Тор	5.825	62.15	164.7	15.5	35.48	1209.15	No

# WLAN Aux\_Ant

Mode	Position	f(GHz)	Power allowed at numeric Threshold at 50mm	Distance (mm)	Pmax(dBm)*	Pmax(mW)	SAR Exclusion Result	Test Requirement (Yes/No)
ВТ	Right	2.48	95.25	215.3	11.5	14.13	1748.25	No
ВТ	Тор	2.48	95.25	165	11.5	14.13	1245.25	No
802.11b	Right	2.462	95.60	215.3	16	39.81	1748.60	No
802.11b	Тор	2.462	95.60	165	16	39.81	1245.60	No
802.11a(5.2G)	Right	5.24	65.53	215.3	17	50.12	1718.53	No
802.11a(5.2G)	Тор	5.24	65.53	165	17	50.12	1215.53	No
802.11a(5.3G)	Right	5.32	65.03	215.3	17	50.12	1718.03	No
802.11a(5.3G)	Тор	5.32	65.03	165	17	50.12	1215.03	No
802.11a(5.5G)	Right	5.72	62.72	215.3	15	31.62	1715.72	No
802.11a(5.5G)	Тор	5.72	62.72	165	15	31.62	1212.72	No
802.11a(5.8G)	Right	5.825	62.15	215.3	15.5	35.48	1715.15	No
802.11a(5.8G)	Тор	5.825	62.15	165	15.5	35.48	1212.15	No

Report No.: BTL-FCC SAR-2-1711C206A



# **8.TEST RESULT**

#### **8.1CONDUCTED POWER RESULTS**

# 8.1.1CONDUCTED POWER MEASUREMENTS OF WIFI 2.4G

Siso Main Ant

Oloo_Mail17 tile						
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
	1	2412		17.20	17.05	
802.11b	6	2437	1	17.20	17.03	Yes
	11	2462		16.00	15.85	

Siso Aux Ant

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
	1	2412		17.20	17.02	
802.11b	6	2437	1	17.20	17.07	Yes
	11	2462		16.00	15.74	

#### Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227 D01, for WiFi 2.4GHz, the highest measured maximum output power Channel for DSSS modes(802.11b)was selected for SAR measurement. SAR for OFDM modes(2.4GHz 802.11g/n) was not required When the highest reported SAR for DSSS is adjusted by the ratio of OFDM modes(802.11g/n)to DSSS modes(802.11b)specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Report No.: BTL-FCC SAR-2-1711C206A



# MIMO Main+Aux Ant

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Main Ant Power	Aux Ant Power	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11g	1	2412	6	12.87	12.82	17.00	15.86	
	6	2437		13.64	13.85	17.00	16.76	
	11	2462		12.74	12.88	17.00	15.82	
802.11n HT20	1	2412	13	14.17	14.27	17.50	17.23	
	6	2437		14.07	14.12	17.50	17.11	No
	11	2462		14.29	14.21	17.50	17.26	
802.11n HT40	3	2422	27	13.32	13.18	17.00	16.26	
	6	2437		13.85	13.83	17.00	16.85	
	9	2452		14.23	14.29	17.50	17.27	

#### Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227 D01, for WiFi 2.4GHz, the highest measured maximum output power Channel for DSSS modes(802.11b)was selected for SAR measurement. SAR for OFDM modes(2.4GHz 802.11g/n) was not required When the highest reported SAR for DSSS is adjusted by the ratio of OFDM modes(802.11g/n)to DSSS modes(802.11b)specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Report No.: BTL-FCC SAR-2-1711C206A



# 8.1.2CONDUCTED POWER MEASUREMENTS OF WIFI 5.2G

Siso Main Ant

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune-up	Average Power(dBm)	SAR Test(Yes/No)
802.11a	36	5180		17.00	16.45	Yes
	40	5200	6	17.00	16.48	
	44	5220	6	17.00	16.55	
	48	5240		17.00	16.77	

Siso\_Aux Ant

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune-up	Average Power(dBm)	SAR Test(Yes/No)
802.11a	36	5180		17.00	16.37	
	40	5200	6	17.00	16.76	Voo
	44	5220	6	17.00	16.74	Yes
	48	5240		17.00	16.82	

MIMO Main+Aux Ant

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Main Ant Power	Aux Ant Power	Tune-up	Average Power (dBm)	SAR Test(Yes/No)
	36	5180	6	13.68	13.85	17.00	16.78	No
802.11a	40	5200		13.89	13.78	17.00	16.85	
002.11a	44	5220		13.57	13.62	17.00	16.61	
	48	5240		13.79	13.68	17.00	16.75	
	36	5180	6.5	13.73	13.77	17.00	16.76	
802.11n HT20	40	5200		13.67	13.66	17.00	16.68	
602.1111 H120	44	5220		13.52	13.28	17.00	16.41	
	48	5240		13.74	13.92	17.00	16.84	
802.11n HT40	38	5190	13.5	12.31	12.32	17.00	15.33	No
602.1111 H140	46	5230		13.78	13.69	17.00	16.75	
802.11ac VHT80	42	5210	29.3	10.88	10.84	14.00	13.87	No

Report No.: BTL-FCC SAR-2-1711C206A



### 8.1.3CONDUCTED POWER MEASUREMENTS OF WIFI 5.3G

Siso\_Main Ant

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune-up	Average Power(dBm)	SAR Test(Yes/No)
	52	5260		17.00	16.58	
000 44-	56	5280	6	17.00	16.71	Vaa
802.11a	60	5300	6	17.00	16.65	Yes
	64	5320		17.00	16.55	

Siso\_Aux Ant

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune-up	Average Power(dBm)	SAR Test(Yes/No)
	52	5260		17.00	16.95	
000 44 -	56	5280	6	17.00	16.69	Vaa
802.11a	60	5300	6	17.00	16.92	Yes
	64	5320		17.00	16.73	

MIMO Main+Aux Ant

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Main Ant Power	Aux Ant Power	Tune-up	Average Power (dBm)	SAR Test(Yes/No)
	52	5260		13.71	13.84	17.00	16.79	
802.11a	56	5280	6	13.46	13.37	17.00	16.43	
002.11a	60	5300		13.32	13.05	17.00	16.20	- No
	64	5320		13.68	13.88	17.00	16.79	
	52	5260	0.5	13.82	13.95	17.00	16.90	
802.11n HT20	56	5280		13.64	13.58	17.00	16.62	
602.1111 H120	60	5300	6.5	13.75	13.81	17.00	16.79	
	64	5320		13.85	13.52	17.00	16.70	
902 11n UT40	54	5270	13.5	13.63	13.95	17.00	16.80	No
802.11n HT40	62	5310	13.3	12.76	12.86	17.00	15.82	INU
802.11ac VHT80	58	5290	29.3	10.82	10.70	14.00	13.77	No

Report No.: BTL-FCC SAR-2-1711C206A



### 8.1.4CONDUCTED POWER MEASUREMENTS OF WIFI 5.5G

Siso Main Ant

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune-up	Average Power(dBm)	SAR Test(Yes/No)
	100	5500		15.00	14.81	
	104	5520	-	15.00	14.52	
	108	5540		15.00	14.34	
	112	5560		15.00	14.18	
802.11a	116	5580	6	15.00	14.87	Yes
	132	5660		15.00	14.62	
	136	5680		15.00	14.62	
	140	5700		15.00	14.75	
	144	5720		15.00	14.46	

Siso Aux Ant

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune-up	Average Power(dBm)	SAR Test(Yes/No)
	100	5500		15.00	14.84	
	104	5520	6	15.00	14.62	
	108	5540		15.00	14.59	
	112	5560		15.00	14.73	
802.11a	116	5580		15.00	14.65	Yes
	132	5660		15.00	14.39	
	136	5680		15.00	14.62	
	140	5700		15.00	14.62	
	144	5720		15.00	14.13	

Report No.: BTL-FCC SAR-2-1711C206A



MIMO Main+Aux Ant

MIMO_Mai		Frequency(MHz)	Data Rate (Mbps)	Main Ant Power	Aux Ant Power	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
	100	5500		11.86	11.56	15.00	14.72	
	104	5520		11.53	11.41	15.00	14.48	
	108	5540		11.47	11.36	15.00	14.43	
802.11a	112	5560	6	11.38	11.08	15.00	14.24	No
002.11a	116	5580	O	11.89	11.62	15.00	14.77	INO
	132	5660		11.28	11.42	15.00	14.36	
	136	5680		11.64	11.39	15.00	14.53	
	140	5700		11.65	11.51	15.00	14.59	
	100	5500		11.84	11.76	15.00	14.81	No
	104	5520		11.62	11.63	15.00	14.64	
	108	5540		11.48	11.48	15.00	14.49	
802.11n	112	5560	6.5	11.69	11.75	15.00	14.73	
HT20	116	5580	0.5	11.76	11.63	15.00	14.71	INO
	132	5660		11.38	11.39	15.00	14.40	
	136	5680		11.59	11.34	15.00	14.48	
	140	5700		11.82	11.85	15.00	14.85	
802.11n	102	5510	12.5	11.68	11.83	15.00	14.77	No
HT40	134	5670	13.5	11.74	11.86	15.00	14.81	INU
802.11ac	106	5530	29.3	11.86	11.76	15.00	14.82	No
VHT80	138	5690	28.5	11.84	11.88	15.00	14.87	INU

Report No.: BTL-FCC SAR-2-1711C206A



### 8.1.5CONDUCTED POWER MEASUREMENTS OF WIFI 5.8G

Siso\_Main Ant

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune-up	Average Power(dBm)	SAR Test(Yes/No)
	149	5745		15.50	15.26	
	153	5765		15.50	15.10	
802.11a	157	5785	6	15.50	15.14	Yes
	161	5805		15.50	15.08	
	165	5825		15.50	15.38	

Siso\_Aux Ant

Mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune-up	Average Power(dBm)	SAR Test(Yes/No)
	149	5745		15.50	15.25	
	153	5765		15.50	15.06	
802.11a	157	5785	6	15.50	15.17	Yes
	161	5805		15.50	15.12	
	165	5825		15.50	15.42	

MIMO Main+Aux Ant

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Main Ant Power	Aux Ant Power	Tune-up	Total Avg Power (dBm)	SAR Test (Yes/No)
	149	5745		11.95	11.73	15.00	14.85	
	153	5765	6	11.56	11.52	15.00	14.55	
802.11a	157	5785		11.85	11.66	15.00	14.77	No
	161	5805		11.74	11.44	15.00	14.60	
	165	5825		11.62	11.76	15.00	14.70	
	149	5745		12.33	12.42	15.50	15.39	
	153	5765		12.18	12.37	15.50	15.29	
802.11n HT20	157	5785	6.5	12.13	12.16	15.50	15.16	No
	161	5805		12.32	12.15	15.50	15.25	
	165	5825		12.41	12.45	15.50	15.44	
902 11n UT40	151	5755	13.5	12.21	12.46	15.50	15.35	No
802.11n HT40	159	5795	13.3	12.35	12.37	15.50	15.37	No
802.11ac VHT80	155	5775	29.3	12.24	12.25	15.50	15.26	No

Report No.: BTL-FCC SAR-2-1711C206A



## 8.1.6CONDUCTED POWER MEASUREMENTS OF BT

		Ave	Average Conducted Power(dBm)					
ВТ	Tune up	СН0	CH39	CH78				
		2402	2441	2480				
DH5	5	4.26	4.15	4.21				
2DH5	4	3.18	3.08	3.12				
3DH5	4	3.16	3.04	3.14				

		Average Conducted Power(dBm)					
ВТ	Tune up	CH0	CH19	СН39			
		2402	2441	2480			
BLE	4	3.84	3.791	3.52			

Report No.: BTL-FCC SAR-2-1711C206A



#### **8.2SAR TEST RESULTS**

#### **General Notes:**

- 1) Per KDB447498 D01, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:  $\leq$  0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq$  100 MHz. When the maximum output power variation across the required test channels is >  $\frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used
- 3) Per KDB865664 D01,for each frequency band,repeated SAR measurement is required only when the measured SAR is  $\ge$ 0.8W/kg; if the deviation among the repeated measurement is  $\le$  20%,and the measured SAR <1.45W/kg,only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is  $\leq$ 1.2 W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

#### **WLAN Notes:**

- 1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated(peak)SAR is used as the initial test position. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
- 2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHZ WIFI single transmission chain operations, the highest measured maximum output powerChannel for DSSS was selected for SAR measurement.SAR for OFDM modes(2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.See Section7.1 for more information.
- 3. Justification for test configurations for WLAN per KDB Publication 248227 for 5GHZ WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed power. Other transmission mode were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg. See Section 7.1 for more information.

Report No.: BTL-FCC SAR-2-1711C206A 42 / 54



### **8.2.1SAR MEASUREMENT RESULT**

1. Tablet Mode SAR test results of WIFI 2.4G, test distance at 0cm.

Test No.	Band	СН	Test Position	Ant status	Ant vendor	Battery	Maximum Tune-up (dBm)	Conducte d Power (dBm)	Power Drift (dB)	SAR Value (W/kg)1-g	Reported SAR
T40	802.11b	1	Rear Face	Α	NDX	1	17.2	17.05	0	0.545	0.564
T41	802.11b	1	Right Side	Α	NDX	1	17.2	17.05	0	0.074	0.077
T42	802.11b	1	Bottom Side	Α	NDX	1	17.2	17.05	0	0.395	0.409
T43	802.11b	6	Rear Face	Α	NDX	1	17.2	17.03	0	0.466	0.485
T44	802.11b	11	Rear Face	Α	NDX	1	16	15.85	0	0.393	0.407
T45	802.11b	1	Rear Face	Α	NDX	2	17.2	17.05	0	0.540	0.559
T46	802.11b	1	Rear Face	Α	NDX	3	17.2	17.05	0	0.532	0.551
T47	802.11b	1	Rear Face	Α	ATC	1	17.2	17.05	0	0.436	0.451
T60	802.11b	6	Rear Face	В	NDX	1	17.2	17.07	0	1.170	1.206
T61	802.11b	6	Left Side	В	NDX	1	17.2	17.07	0	0.115	0.118
T62	802.11b	6	Bottom Side	В	NDX	1	17.2	17.07	0	0.539	0.555
T63	802.11b	1	Rear Face	В	NDX	1	17.2	17.02	0	0.954	0.994
T64	802.11b	11	Rear Face	В	NDX	1	16	15.74	0	0.701	0.744
T65	802.11b	6	Rear Face	В	NDX	2	17.2	17.07	0	1.080	1.113
T66	802.11b	6	Rear Face	В	NDX	3	17.2	17.07	0	1.140	1.175
T67	802.11b	6	Rear Face	В	ATC	1	17.2	17.07	0	0.289	0.298
T68	802.11b	6	Rear Face(1st Repeat test)	В	NDX	1	17.2	17.07	0	1.130	1.164

Report No.: BTL-FCC SAR-2-1711C206A



2. Tablet Mode SAR test results of WIFI 5.3G / 5.5G, test distance at 0cm.

۷.				cuite ci	WIFI 5.3G	7 0.00, 1					
Test			Test	Ant		<b>5</b> "	Maximum _	Conducted	Power	SAR Value	Reported
No.	Band	СН	Position	status	Ant vendor	Battery	Tune-up	Power	Drift	(W/kg)1-g	SAR
							(dBm)	(dBm)	(dB)		
T120	802.11a	56	Rear Face	Α	NDX	1	17	16.71	0	0.435	0.465
T121	802.11a	56	Right Side	Α	NDX	1	17	16.71	0	0.151	0.161
T122	802.11a	56	Bottom Side	Α	NDX	1	17	16.71	0	0.226	0.242
T123	802.11a	52	Rear Face	Α	NDX	1	17	16.58	0	0.347	0.382
T125	802.11a	64	Rear Face	Α	NDX	1	17	16.55	0	0.518	0.575
T126	802.11a	64	Rear Face	Α	NDX	2	17	16.55	0	0.462	0.512
T127	802.11a	64	Rear Face	Α	NDX	3	17	16.55	0	0.465	0.516
T128	802.11a	64	Rear Face	Α	ATC	1	17	16.55	0	0.183	0.203
T140	802.11a	52	Rear Face	В	NDX	1	17	16.95	0	0.615	0.622
T141	802.11a	52	Left Side	В	NDX	1	17	16.95	0	0.118	0.119
T142	802.11a	52	Bottom Side	В	NDX	1	17	16.95	0	0.678	0.686
T143	802.11a	60	Bottom Side	В	NDX	1	17	16.67	0.1	0.821	0.886
T144	802.11a	64	Bottom Side	В	NDX	1	17	16.73	0	0.756	0.804
T145	802.11a	60	Bottom Side	В	NDX	2	17	16.67	0	0.762	0.822
T146	802.11a	60	Bottom Side	В	NDX	3	17	16.67	0	0.672	0.725
T147	802.11a	60	Bottom Side	В	ATC	1	17	16.67	0	1.030	1.111
T148	802.11a	60	Bottom Side(1st Repeat test)	В	ATC	1	17	16.67	0	1.010	1.090
T200	802.11a	116	Rear Face	Α	NDX	1	15	14.87	0	0.140	0.144
T201	802.11a	116	Right Side	Α	NDX	1	15	14.87	0	0.072	0.074
T202	802.11a	116	Bottom Side	Α	NDX	1	15	14.87	0	0.090	0.093
T203	802.11a	100	Rear Face	Α	NDX	1	15	14.81	0	0.192	0.201
T204	802.11a	144	Rear Face	Α	NDX	1	15	14.46	0	0.140	0.159
T206	802.11a	100	Rear Face	Α	NDX	2	15	14.81	0	0.194	0.203
T207	802.11a	100	Rear Face	Α	NDX	3	15	14.81	0	0.214	0.224
T208	802.11a	100	Rear Face	Α	ATC	3	15	14.81	0	0.192	0.201
T220	802.11a	100	Rear Face	В	NDX	1	15	14.84	0	0.762	0.791
T221	802.11a	100	Left Side	В	NDX	1	15	14.84	0	0.081	0.084
T222	802.11a	100	Bottom Side	В	NDX	1	15	14.84	0	0.724	0.751
T223	802.11a	132	Bottom Side	В	NDX	1	15	14.39	0	0.696	0.801
T224	802.11a	144	Bottom Side	В	NDX	1	15	14.13	0	0.765	0.935
T226	802.11a	144	Bottom Side	В	NDX	2	15	14.13	0	0.876	1.070
T227	802.11a	144	Bottom Side	В	NDX	3	15	14.13	0	0.841	1.028
T228	802.11a	144	Bottom Side	В	ATC		15	14.13	0	0.209	0.255
T229	802.11a	144	Bottom Side(1st Repeat test)	В	NDX	2	15	14.13	0	0.856	1.046

Report No.: BTL-FCC SAR-2-1711C206A



3. Tablet Mode SAR test results of WIFI 5.8G, test distance at 0cm.

Test	Band	СН	Test Position	Ant status	Ant vendor	Battery	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR Value (W/kg)1-g	Reported SAR
T280	802.11a	165	Rear Face	Α	NDX	1	15.5	15.38	0	0.204	0.210
T281	802.11a	165	Right Side	А	NDX	1	15.5	15.38	0	0.107	0.110
T282	802.11a	165	Bottom Side	А	NDX	1	15.5	15.38	0	0.050	0.052
T283	802.11a	149	Rear Face	А	NDX	1	15.5	15.26	0	0.217	0.229
T284	802.11a	157	Rear Face	А	NDX	1	15.5	15.14	0	0.220	0.239
T286	802.11a	157	Rear Face	А	NDX	2	15.5	15.14	0	0.214	0.232
T287	802.11a	157	Rear Face	А	NDX	3	15.5	15.14	0	0.213	0.231
T288	802.11a	157	Rear Face	Α	ATC	1	15.5	15.14	0	0.145	0.158
T301	802.11a	165	Rear Face	В	NDX	1	15.5	15.42	0	0.690	0.703
T302	802.11a	165	Left Side	В	NDX	1	15.5	15.42	0	0.091	0.093
T303	802.11a	165	Bottom Side	В	NDX	1	15.5	15.42	0.19	1.170	1.192
T304	802.11a	149	Bottom Side	В	NDX	1	15.5	15.25	0.02	1.210	1.282
T305	802.11a	157	Bottom Side	В	NDX	1	15.5	15.17	0.02	1.180	1.273
T307	802.11a	149	Bottom Side	В	NDX	2	15.5	15.25	0	1.110	1.176
T308	802.11a	149	Bottom Side	В	NDX	3	15.5	15.25	0	1.170	1.239
T309	802.11a	149	Bottom Side	В	ATC	1	15.5	15.25	0	0.409	0.433
T310	802.11a	149	Bottom Side(1st Repeat test)	В	NDX	1	15.5	15.25	0.02	1.130	1.197

Report No.: BTL-FCC SAR-2-1711C206A



## 4. NB Mode SAR test results of WIFI 2.4G

Test No.	Band	СН	Test Position	Distance (cm)	Ant status	Ant vendor	Battery	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR Value (W/kg)1-g	Reported SAR
T50	802.11b	1	Rear Face	2.5	Α	NDX	1	17.2	17.05	0	0.007	0.007
T51	802.11b	1	Bottom Side	0	Α	NDX	1	17.2	17.05	0	0.144	0.149
T52	802.11b	6	Bottom Side	0	Α	NDX	1	17.2	17.03	0.09	0.165	0.172
T53	802.11b	11	Bottom Side	0	Α	NDX	1	16	15.85	0.03	0.124	0.128
T54	802.11b	1	Bottom Side	0	Α	NDX	2	17.2	17.05	0	0.156	0.161
T55	802.11b	1	Bottom Side	0	Α	NDX	3	17.2	17.05	0	0.160	0.166
T56	802.11b	6	Bottom Side	0	Α	ATC	1	17.2	17.05	0.09	0.141	0.146
T70	802.11b	6	Rear Face	2.5	В	NDX	1	17.2	17.07	0	0.010	0.010
T71	802.11b	6	Bottom Side	0	В	NDX	1	17.2	17.07	0	0.000	0.000
T72	802.11b	1	Rear Face	2.5	В	NDX	1	17.2	17.02	0	0.010	0.011
T73	802.11b	11	Rear Face	2.5	В	NDX	1	16	15.74	0	0.000	0.000
T74	802.11b	1	Rear Face	2.5	В	NDX	2	17.2	17.02	0	0.009	0.009
T75	802.11b	1	Rear Face	2.5	В	NDX	3	17.2	17.02	0	0.009	0.010
T76	802.11b	1	Rear Face	2.5	В	ATC	1	17.2	17.02	0	0.000	0.000

Report No.: BTL-FCC SAR-2-1711C206A



## 5. NB Mode SAR test results of WIFI 5.3G / 5.5G

Test	Band	СН	Test Position	Distance (cm)	Ant status	Ant vendor	Batter y	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR Value (W/kg)1-g	Reported SAR
T130	802.11a	56	Rear Face	2.5	A	NDX	1	17	16.71	0	0.036	0.038
T131	802.11a	56	Bottom Side	0	Α	NDX	1	17	16.71	0	0.123	0.131
T132	802.11a	52	Bottom Side	0	Α	NDX	1	17	16.58	0	0.119	0.131
T133	802.11a	64	Bottom Side	0	Α	NDX	1	17	16.55	0	0.127	0.141
T135	802.11a	64	Bottom Side	0	Α	NDX	2	17	16.55	0	0.134	0.149
T136	802.11a	64	Bottom Side	0	Α	NDX	3	17	16.55	0	0.102	0.113
T137	802.11a	64	Bottom Side	0	Α	ATC	2	17	16.55	0	0.022	0.024
T150	802.11a	52	Rear Face	2.5	В	NDX	1	17	16.95	0	0.056	0.057
T151	802.11a	52	Bottom Side	0	В	NDX	1	17	16.95	0	0.190	0.192
T152	802.11a	60	Bottom Side	0	В	NDX	1	17	16.67	0	0.209	0.225
T154	802.11a	64	Bottom Side	0	В	NDX	1	17	16.73	0	0.197	0.210
T155	802.11a	60	Bottom Side	0	В	NDX	2	17	16.67	0	0.202	0.218
T156	802.11a	60	Bottom Side	0	В	NDX	3	17	16.67	0	0.217	0.234
T157	802.11a	60	Bottom Side	0	В	ATC	1	17	16.67	0	0.233	0.251
T210	802.11a	116	Rear Face	2.5	Α	NDX	1	15	14.87	0	0.001	0.001
T211	802.11a	116	Bottom Side	0	Α	NDX	1	15	14.87	0	0.025	0.026
T212	802.11a	100	Bottom Side	0	Α	NDX	1	15	14.81	0	0.022	0.023
T213	802.11a	144	Bottom Side	0	Α	NDX	1	15	14.46	0	0.022	0.024
T215	802.11a	100	Bottom Side	0	Α	NDX	2	15	14.81	0	0.023	0.024
T216	802.11a	100	Bottom Side	0	Α	NDX	3	15	14.81	0	0.021	0.022
T217	802.11a	100	Bottom Side	0	Α	ATC	1	15	14.81	0	0.000	0.000
T230	802.11a	100	Rear Face	2.5	В	NDX	1	15	14.84	0	0.046	0.048
T231	802.11a	100	Bottom Side	0	В	NDX	1	15	14.84	0	0.090	0.093
T232	802.11a	132	Bottom Side	0	В	NDX	1	15	14.39	0	0.125	0.144
T233	802.11a	144	Bottom Side	0	В	NDX	1	15	14.13	0	0.074	0.090
T235	802.11a	144	Bottom Side	0	В	NDX	2	15	14.13	0	0.132	0.161
T236	802.11a	144	Bottom Side	0	В	NDX	3	15	14.13	0	0.138	0.169
T237	802.11a	144	Bottom Side	0	В	ATC	3	15	14.13	0	0.041	0.050

Report No.: BTL-FCC SAR-2-1711C206A



### 6. NB Mode SAR test results of WIFI 5.8G

Test No.	Band	СН	Test Position	Distance (cm)	Ant status	Ant vendor	Batter y	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR Value (W/kg)1-g	Reported SAR
T291	802.11a	165	Rear Face	2.5	Α	NDX	1	15.5	15.38	0	0.026	0.026
T292	802.11a	165	Bottom Side	0	Α	NDX	1	15.5	15.38	0	0.017	0.017
T293	802.11a	149	Rear Face	2.5	Α	NDX	1	15.5	15.26	0	0.018	0.019
T294	802.11a	157	Rear Face	2.5	Α	NDX	1	15.5	15.14	0	0.018	0.020
T296	802.11a	165	Rear Face	2.5	Α	NDX	2	15	15.14	0	0.021	0.021
T297	802.11a	165	Rear Face	2.5	Α	NDX	3	15	15.14	0	0.020	0.019
T298	802.11a	165	Rear Face	2.5	Α	ATC	1	15	15.14	0	0.005	0.004
T312	802.11a	165	Rear Face	2.5	В	NDX	1	15.5	15.42	0	0.087	0.088
T313	802.11a	165	Bottom Side	0	В	NDX	1	15.5	15.42	0	0.157	0.160
T314	802.11a	149	Bottom Side	0	В	NDX	1	15.5	15.25	0	0.121	0.128
T315	802.11a	157	Bottom Side	0	В	NDX	1	15.5	15.17	0	0.137	0.148
T317	802.11a	165	Bottom Side	0	В	NDX	2	15	15.25	0	0.132	0.125
T318	802.11a	165	Bottom Side	0	В	NDX	3	15	15.25	0	0.146	0.138
T319	802.11a	165	Bottom Side	0	В	ATC	1	15	15.25	0	0.117	0.110


Report No.: BTL-FCC SAR-2-1711C206A



#### 8.3 MULTIPLE TRANSMITTER EVALUATION

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06.

The location of the antennas inside the pad is shown as below picture:

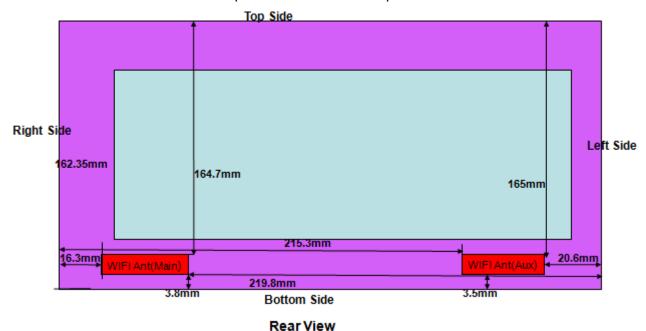

Per FCC KDB 447498D01, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

WiFi 2.4G / WiFi 5G / BT transmit simultaneously

Co-Location	WiFi 2.4G(Aux)	WiFi 5G(Aux)	BT(Aux)
WiFi 2.4G(Main)	Yes	No	Yes
WiFi 5G(Main)	No	Yes	Yes
BT(Aux)	No	No	No

Note: 1). BT antenna only supports the aux antenna.

2). The module has support the MIMO Tx.

Report No.: BTL-FCC SAR-2-1711C206A



#### 8.3.1SAR SUMMATION SCENARIO

About WiFi (Main Antenna) and BT(Aux Antenna) transmit simultaneously for Tablet Mode

Test Position  Reported  SAR <sub>1g</sub> (W/Kg)	Rear Face	Left Side	Right Side	Bottom Side
WiFi 2.4G(Main)	0.564	0	0.077	0.409
WiFi 5.3G(Main)	0.575	0	0.161	0.242
WiFi 5.5G(Main)	0.224	0	0.074	0.093
WiFi 5.8G(Main)	0.239	0	0.110	0.052
BT(Aux)	0	0	0	0
MAX ∑SAR <sub>1q</sub>	0.575	0	0.161	0.409

Note: MAX.  $\Sigma$ SAR<sub>1g</sub>=0.575 W/Kg < 1.6 W/Kg, so the SAR to peak location separation ratio should be not considered.

About WiFi (Main Antenna) and WiFi (Aux Antenna) transmit simultaneously for Tablet Mode

Test Position	Rear	Rear Face		Left Side		MAX	Right Side		MAX	Bottom Side		MAX
Reported	Main	Aux	∑SAR <sub>1g</sub>	Main	Aux	∑SAR <sub>1g</sub>	Main	Aux	∑SAR <sub>1g</sub>	Main	Aux	∑SAR <sub>1g</sub>
SAR <sub>1g</sub> (W/Kg)	Ant	Ant		Ant	Ant		Ant	Ant		Ant	Ant	
WiFi 2.4G(Main)+ WiFi 2.4G(Aux)	0.564	1.206	1.770	0	0.118	0.118	0.077	0	0.077	0.409	0.555	0.964
WiFi 5.3G(Main)+ WiFi 5.3G(Aux)	0.575	0.622	1.197	0	0.119	0.119	0.161	0	0.161	0.242	1.111	1.353
WiFi 5.5G(Main)+ WiFi 5.5G(Aux)	0.224	0.791	1.015	0	0.084	0.084	0.074	0	0.074	0.093	1.07	1.163
WiFi 5.8G(Main)+ WiFi 5.8G(Aux)	0.239	0.703	0.942	0	0.093	0.093	0.11	0	0.110	0.052	1.282	1.334

Note: 1. The value with boldface is the MAX.  $\Sigma SAR_{1g} > 1.6$  W/Kg.

- 2. MAX.  $\Sigma$ SAR<sub>1g</sub>=1.770W/Kg > 1.6 W/Kg, so the SAR to peak location separation ratio should be considered.
- 3. Because the SPLSR is 0.014 under 0.04 of the WiFi 2.4G, the Simultaneous Transmission SAR is not required.

Report No.: BTL-FCC SAR-2-1711C206A



About WiFi (Main Antenna) and BT(Aux Antenna) transmit simultaneously for NB Mode

Test Position  Reported  SAR <sub>1g</sub> (W/Kg)	Rear Face	Bottom Side
WiFi 2.4G(Main)	0.007	0.172
WiFi 5.3G(Main)	0.038	0.149
WiFi 5.5G(Main)	0.001	0.026
WiFi 5.8G(Main)	0.026	0.017
BT(Aux)	0	0
MAX ∑SAR <sub>1g</sub>	0.038	0.172

MAX.  $\Sigma$ SAR<sub>1g</sub>=0.172 W/Kg < 1.6 W/Kg, so the SAR to peak location separation ratio should be not considered.

About WiFi (Main Antenna) and WiFi (Aux Antenna) transmit simultaneously for NB Mode

Test Position	Rear	Face		Bottom	Side	MAX ∑SAR <sub>1g</sub>	
Reported SAR <sub>1g</sub> (W/Kg)	Main Ant	Aux Ant	MAX ∑SAR <sub>1g</sub>	Main Ant	Aux Ant		
WiFi 2.4G(Main)+ WiFi 2.4G(Aux)	0.007	0.011	0.018	0.172	0	0.172	
WiFi 5.3G(Main)+ WiFi 5.3G(Aux)	0.038	0.057	0.095	0.149	0.251	0.400	
WiFi 5.5G(Main)+ WiFi 5.5G(Aux)	0.001	0.048	0.049	0.026	0.169	0.195	
WiFi 5.8G(Main)+ WiFi 5.8G(Aux)	0.026	0.088	0.114	0.017	0.16	0.177	

MAX.  $\Sigma$ SAR<sub>1g</sub>=0.400 W/Kg < 1.6 W/Kg, so the SAR to peak location separation ratio should be not considered.

Report No.: BTL-FCC SAR-2-1711C206A



#### 8.3.2SIMULTANEOUS TRANSMISSION CONLCUSION

According to KDB447498 D01, When the sum of SAR is larger than limit, SAR test exclusion isdetermined by the SAR to peak location separation ratio(SPLSR). When the SAR to peak location ratio for each pair of antennas is 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. When 10-g SAR applies, the ratio must be ≤ 0.10.


When SAR is measured for both antennas in the pair the peak location separation distance is computed by the followingformula:

Distance<sub>Tx1-Tx2</sub> = 
$$R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$
  
SPLS Ratio =  $(SAR_1 + SAR_2)^{1.5}/R_i$ 

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location should be translated onto the test device to determine the peak location separation for the antenna pair. The ERP location on the phantom is aligned with the ERP location on the handset, with 6mm separation in the z coordinate due to the ear spacer. A measured peak location can be translated onto the handset, with respect to the ERP location, by ignoring the 6 mm offset in the z coordinate. The assumed peak location of the antenna with estimated SAR can also be determined with respect to the ERP location on the handset. The peak location separation distance is estimated by the x and y coordinated of the peaks, referenced to the ERP location. While flat phantoms are not expected to have these issues, the same peak translation approach should be applied to determine peak location separation.

1) The sum of aggregate 1g SAR was above 1.6 W/kg for Rear Face configuration with 802.11b Main ant with Aux Ant.

The Peak SAR location is as below:

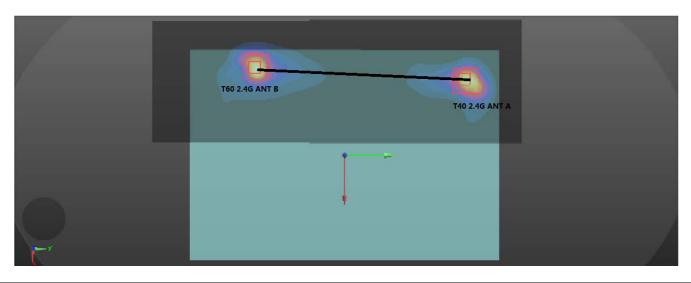

Mode	Reported SAR <sub>1g</sub>	Peak SAR <sub>1g</sub>	X	Y	Z	D(mm)	SPLSR	Ratio Limit	Simultaneous	
	mW/g	mW/g			m				SAR	
802.11b_Main Ant	0.564	0.569	-0.064	0.097	-0.179					
802.11b_Aux Ant	1.206	1.290	-0.073	-0.0735	-0.179	170.7	0.014	0.04	No	

Report No.: BTL-FCC SAR-2-1711C206A



## **APPENDIX**

# 1. Test Layout





## Liquid depth in the flat Phantom (≥15cm depth)



Report No.: BTL-FCC SAR-2-1711C206A



# Appendix A. SAR Plots of System Verification

(Pls See Appendix A.)

## Appendix B. SAR Plots of SAR Measurement

(Pls See Appendix B.)

## Appendix C. Calibration Certificate for Probe and Dipole

(Pls See Appendix C.)

# Appendix D. Photographs of the Test Set-Up

(Pls See Appendix D.)

### **End**

Report No.: BTL-FCC SAR-2-1711C206A