


# FCC SAR Test Report


## FCC ID: TX2-RTL8822CE

**Project No.** : 1911C198  
**Equipment** : 802.11a/b/g/n/ac RTL8822CE Combo module  
**Brand Name** : Realtek  
**Test Model** : RTL8822CE  
**Series Model** : N/A  
**Date of Receipt** : Nov. 29, 2019  
**Date of Test** : Dec. 20, 2019 ~ Dec. 21, 2019  
**Issued Date** : Dec. 31, 2019  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: D2019120225, D2019120226  
**Standard(s)** : Please refer to page 2.  
**Applicant** : Realtek Semiconductor Corp.  
**Address** : No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan  
**Manufacturer** : Realtek Semiconductor Corp.  
**Address** : No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Rot Liang



Approved by : Herbort Liu



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: [www.newbtl.com](http://www.newbtl.com)

<b>Standard(s)</b>	<p><b>ANSI Std C95.1-1992</b> Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)</p> <p><b>IEEE Std 1528-2013</b> Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p> <p><b>KDB616217 D04</b> SAR for laptop and tablets v01r02 <b>KDB447498 D01</b> General RF Exposure Guidance v06 <b>KDB248227 D01</b> 802. 11 Wi-Fi SAR v02r02 <b>KDB865664 D01</b> SAR measurement 100 MHz to 6 GHz v01r04 <b>KDB865664 D02</b> SAR Reporting v01r02 <b>KDB690783 D01</b> SAR Listings on Grants v01r03</p>
--------------------	---

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . RF EMISSIONS MEASUREMENT</b>	<b>7</b>
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2 . GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 STATEMENT OF COMPLIANCE	9
2.3 LABORATORY ENVIRONMENT	9
2.4 MAIN TEST INSTRUMENTS	10
<b>3 . SAR MEASUREMENTS SYSTEM CONFIGURATION</b>	<b>11</b>
3.1 SAR MEASUREMENT SET-UP	11
3.1.1 TEST SETUP LAYOUT	11
3.2 DASY5 E-FIELD PROBE SYSTEM	12
3.2.1 PROBE SPECIFICATION	12
3.2.2 E-FIELD PROBE CALIBRATION	13
3.2.3 OTHER TEST EQUIPMENT	14
3.2.4 SCANNING PROCEDURE	15
3.2.5 SPATIAL PEAK SAR EVALUATION	16
3.2.6 DATA STORAGE AND EVALUATION	17
3.2.7 DATA EVALUATION BY SEMCAD	18
<b>4 . SYSTEM VERIFICATION PROCEDURE</b>	<b>20</b>
4.1 TISSUE VERIFICATION	20
4.2 SYSTEM CHECK	21
4.3 SYSTEM CHECK PROCEDURE	21
<b>5 . SAR MEASUREMENT VARIABILITY AND UNCERTAINTY</b>	<b>22</b>
5.1 SAR MEASUREMENT VARIABILITY	22
<b>6 . OPERATIONAL CONDITIONS DURING TEST</b>	<b>23</b>
6.1 SAR TEST CONFIGURATION	23
6.1.1 WIFI TEST CONFIGURATION	23
6.2 TEST POSITION	25
6.2.1 NOTEBOOK MODE	25
6.2.2 TABLET MODE	25
<b>7 . TEST RESULT</b>	<b>26</b>
7.1 CONDUCTED POWER RESULTS	26
7.1.1 CONDUCTED POWER MEASUREMENTS OF WIFI 2.4G	27

<b>Table of Contents</b>	<b>Page</b>
7.1.2 CONDUCTED POWER MEASUREMENTS OF WIFI 5.2G	33
7.1.3 CONDUCTED POWER MEASUREMENTS OF WIFI 5.3G	35
7.1.4 CONDUCTED POWER MEASUREMENTS OF WIFI 5.6G	37
7.1.5 CONDUCTED POWER MEASUREMENTS OF WIFI 5.8G	40
7.1.6 CONDUCTED POWER MEASUREMENTS OF BT	43
<b>7.2 SAR TEST RESULTS</b>	<b>44</b>
7.2.1 SAR MEASUREMENT RESULT	45
<b>7.3 MULTIPLE TRANSMITTER EVALUATION</b>	<b>48</b>
7.3.1 STAND-ALONE SAR TEST EXCLUSION	48
7.3.2 SIMULTANEOUS TRANSMISSION CONDITIONS	49
7.3.3 SIMULTANEOUS TRANSMISSION CONLCUSION	50
<b>APPENDIX</b>	<b>56</b>
1. TEST LAYOUT	56
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate	
Appendix D. Photographs of the Test Set-Up	
Appendix E. Antenna location	

**REPORT ISSUED HISTORY**

Report Version	Description	Issued Date
R00	Original Issue.	Dec. 31, 2019

## 1. RF EMISSIONS MEASUREMENT

### 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is **SAR room** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792

### 1.2 MEASUREMENT UNCERTAINTY

Note: Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	802.11a/b/g/n/ac RTL8822CE Combo module								
Test Model	RTL8822CE								
Modulation	WiFi(DSSS/OFDM), BT(GFSK/π/4-DQPSK/8-DPSK)								
Operation Frequency Range(s)	Band	TX (MHz)		RX (MHz)					
	Bluetooth	2400-2483.5							
	2.4G WIFI	2400-2483.5							
	5.2G WLAN	5150-5250							
	5.3G WLAN	5250-5350							
	5.6G WLAN	5470-5725							
	5.8G WLAN	5725-5850							
Test Channels (low-mid-high)	0-39-78(BT)								
	0-19-39(BLE)								
	1-6-11-12-13 (2.4G WIFI 802.11b)								
	1-2-3-6-9-10-11-12-13 (2.4G WIFI 802.11g/n HT20, VHT20)								
	3-4-6-8-9-10-11 (2.4G WIFI 802.11n HT40, VHT40)								
	5G WLAN	5.2G WLAN	5.3G WLAN	5.6G WLAN	5.8G WLAN				
	802.11a/n HT20/ ac VHT 20	36-40-44-48	52-56-60-64	100-104-108- 112-116-132- 136-140	149-153-157- 161-165				
	802.11n HT40/ ac VHT 40	38-46	54-62	102-110-118- 126-134	151-159				
	802.11ac VHT80	42	58	106-122	155				
Antenna Gain	Antenna	Antenna Type	P/N	Band	Ant Gain (dBi)	Manufacture			
	Ant 2 (Main Ant)	PIFA	WA-F-LB-02-207	2400-2500MHz	1.78	INPAQ			
				5150-5350MHz	2.66				
				5450-5650MHz	2.78				
				5750-5850MHz	2.88				
	Ant 1 (Aux Ant)	PIFA	WA-F-LB-01-081	2400-2500MHz	1.32	INPAQ			
				5150-5350MHz	2.82				
				5450-5650MHz	2.74				
				5750-5850MHz	2.81				
	Ant 2 (Main Ant)	PIFA	N12-6280-R0A	2400-2500MHz	1.75	South Star			
				5150-5350MHz	2.24				
				5450-5650MHz	2.85				
				5750-5850MHz	2.93				
	Ant 1 (Aux Ant)	PIFA	N12-6281-R0A	2400-2500MHz	-0.31	South Star			
				5150-5350MHz	2.98				
				5450-5650MHz	2.01				
				5750-5850MHz	1.93				
<b>Other Information</b>									
Battery1	Model	L19M3PF8							
	Power Rating	11.58Vdc 36.4Wh							
	Manufacturer	Simplo							
Battery2	Model	L19C3PF8							
	Power Rating	11.58Vdc 36.4Wh							
	Manufacturer	Cexlpert							

Note:

1. Implementation in the following platform

Model: IdeaPad Flex 3 11IGL05, IdeaPad Flex 3 11IGL05xxxxxx, 82B2, 82B2xxxxxx

(The "x" in the model name can be 0 to 9, A to Z, a to z, "-" or blank, it represents different sales customer code, all models only name difference)

Product name: Notebook Computer

Brand name: Lenovo

2. Vht mode is an extension of n mode, it is only differ in rate.

## 2.2 STATEMENT OF COMPLIANCE

Mode	Highest Reported Body SAR-1g Ant 1 (W/kg)	Highest Reported Body SAR-1g Ant 2 (W/kg)
2.4G WLAN	1.40	1.39
5.2G WLAN	1.25	1.37
5.3G WLAN	1.33	1.30
5.6G WLAN	1.28	1.33
5.8G WLAN	1.30	1.29
Bluetooth	0.08	/

**Note: The highest SAR for body and simultaneous transmission exposure conditions are 1.40W/kg(Ant 1), 1.39W/kg(Ant 2) and 1.47W/kg respectively.**

Note:

The device is in compliance with Specific Absorption Rate (SAR) for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

## 2.3 LABORATORY ENVIRONMENT

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## 2.4 MAIN TEST INSTRUMENTS

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1390	May 25, 2019	1 Year
2	Data Acquisition Electronics	Speag	DAE3	420	Jun. 21, 2019	1 Year
3	E-field Probe	Speag	ES3DV3	3162	Apr. 12, 2019	1 Year
4	E-field Probe	Speag	EX3DV4	7544	Sep. 09, 2019	1 Year
5	System Validation Dipole	Speag	D2450V2	919	Jun. 11, 2018	3 Years
6	System Validation Dipole	Speag	D5GHzV2	1160	Jun. 20, 2018	3 Years
7	ELI4 Phantom	Speag	ELI4 Phantom V5.0	1222	N/A	N/A
8	Power Amplifier	Mini-Circuits	ZHL-42W+	QA1333003	Feb. 25, 2019	1 Year
9	Power Amplifier	Mini-Circuits	ZVE-8G+	520701341	Feb. 25, 2019	1 Year
10	DC Source	Iteck	OT6154	M00157	Aug. 03, 2019	1 Year
11	ENA Network Analyzer	Agilent	E5071C	MY46102965	Mar. 10, 2019	1 Year
12	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Aug. 03, 2019	1 Year
13	Signal Generator	Agilent	E4438C	MY4907131	Mar. 10, 2019	1 Year
14	P-series power meter	Agilent	N1911A	MY45100473	Sep. 23, 2019	1 Year
15	Wideband power sensor	Agilent	N1921A	MY51100041	Sep. 23, 2019	1 Year
16	Smart Power Sensor	R&S	NRP-Z21	102209	Mar. 01, 2019	1 Year
17	Dielectric Assessment Kit	Speag	DAK-3.5	1226	N/A	N/A
18	Dual directional coupler	Woken	TS-PCC0M-05	107090019	Mar. 10, 2019	1 Year
19	Coupler	Woken	0110A05601O-10	COM5BNW1A2	Mar. 10, 2019	1 Year
20	Digital Thermometer	LKM	DTM3000	3519	Jul. 08, 2019	1 Year

Note:

1. "N/A" denotes no model name, serial No. or calibration specified.
2. \* The test equipment recalibrated between different test periods were within the valid period when the tests were performed.
3.
  - 1) Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
    - a) There is no physical damage on the dipole;
    - b) System check with specific dipole is within 10% of calibrated value;
    - c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement;
    - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within  $5\Omega$  from the previous measurement.
  - 2) Network analyzer probe calibration against air, distilled water and a short block performed before measuring liquid parameters.


### 3. SAR MEASUREMENTS SYSTEM CONFIGURATION

#### 3.1 SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

##### 3.1.1 TEST SETUP LAYOUT

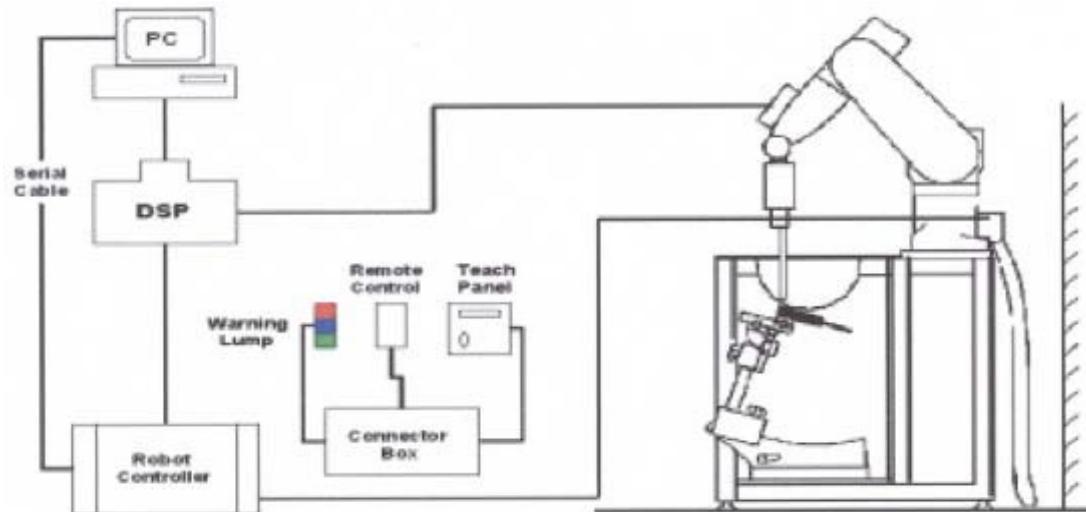

### 3.2 DASY5 E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4 and ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### 3.2.1 PROBE SPECIFICATION

##### EX3DV4

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm

##### ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 4 GHz Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	5 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 4 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm



**E-field Probe**

### 3.2.2 E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermostat-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$ =Exposure time(30 seconds),

$C$  =Heat capacity of tissue (brain or muscle),

$\Delta T$ =Temperature increase due to RF exposure.

$$\text{Or SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  $\sigma$ = Simulated Tissue Conductivity,

$\rho$ =Tissue density (kg/m<sup>3</sup>).

### 3.2.3 OTHER TEST EQUIPMENT

#### 3.2.3.1 Device Holder for Transmitters

**Construction:** Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is light weight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

**Material:** POM, Acrylic glass, Foam

#### 3.2.3.2 Phantom

Model	ELI4 Phantom
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell Thickness	2±0.1 mm
Filling Volume	Approx. 30 liters
Dimensions	Length: 600 mm ; Width: 190mm Height: adjustable feet
Available	Special



### 3.2.4 SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max.  $\pm 5\%$ .

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)

- Area Scan

The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ( $\leq 2\text{GHz}$ ), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

- Zoom Scan

A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution:  $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} \leq 8\text{mm}$ , 2-4GHz  $\leq 5\text{ mm}$  and 4-6 GHz  $\leq 4\text{mm}$ ;  $\Delta z_{\text{zoom}} \leq 3\text{GHz} \leq 5\text{ mm}$ , 3-4 GHz  $\leq 4\text{mm}$  and 4-6GHz  $\leq 2\text{mm}$  where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximum Area Scan resolution ( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ )	Maximum Zoom Scan spatial resolution ( $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$ )	Maximum Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid		Graded Grad	
			$\Delta z_{\text{Zoom}}(n)$	$\Delta z_{\text{Zoom}}(1)^*$	$\Delta z_{\text{Zoom}}(n>1)^*$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	$\geq 25\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	$\geq 22\text{mm}$

### 3.2.5 SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution) or 8 x 8 x 7 points (with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computer mathematic, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

#### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computer mathematic, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

#### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

#### Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

### 3.2.6 DATA STORAGE AND EVALUATION

#### 3.2.6.1 Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 3.2.7 DATA EVALUATION BY SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, $a_{i0}$ , $a_{i1}$ , $a_{i2}$
	Conversion factor	ConvFi
	Diode compression point	Dcp <i>i</i>
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multi meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	$V_i$ = compensated signal of channel <i>i</i>	( <i>i</i> = x, y, z )
	$U_i$ = input signal of channel <i>i</i>	( <i>i</i> = x, y, z )
	cf = crest factor of exciting field	(DASY parameter)
	dcp <i>i</i> = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With  $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )

$\text{Norm}_i$  = sensor sensitivity of channel  $i$  ( $i = x, y, z$ )  
 $[mV/(V/m)]^2$  for E-field Probes

$\text{ConvF}$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel  $i$  in V/m

$H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_X^2 + E_Y^2 + E_Z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With  $\text{SAR}$  = local specific absorption rate in mW/g

$E_{\text{tot}}$  = total field strength in V/m  
 = conductivity in [mho/m] or [Siemens/m]  
 = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With  $P_{\text{pwe}}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{\text{tot}}$  = total field strength in V/m

$H_{\text{tot}}$  = total magnetic field strength in A/m

## 4. SYSTEM VERIFICATION PROCEDURE

### 4.1 TISSUE VERIFICATION

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Body 2450	-	31.4	-	0.1	-	-	68.5	-
Body 5G	-	-	-	-	-	10.7	78.6	10.7

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity  
HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy)ethanol]  
Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Verification									
Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Targeted Conductivity ( $\sigma$ )	Targeted Permittivity ( $\epsilon_r$ )	Deviation Conductivity ( $\sigma$ ) (%)	Deviation Permittivity ( $\epsilon_r$ ) (%)	Date
Body	2450	22.3	2.036	52.013	1.95	52.7	4.41	-1.30	Dec. 21, 2019
Body	5200	22.4	5.321	47.346	5.30	49.0	0.40	-3.38	Dec. 20, 2019
Body	5300	22.4	5.454	47.175	5.42	48.9	0.63	-3.53	Dec. 20, 2019
Body	5500	22.4	5.741	46.818	5.65	48.6	1.61	-3.67	Dec. 20, 2019
Body	5600	22.4	5.889	46.629	5.77	48.5	2.06	-3.86	Dec. 20, 2019
Body	5800	22.4	6.176	46.237	6.00	48.2	2.93	-4.07	Dec. 20, 2019

Note:

- 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

## 4.2 SYSTEM CHECK

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.


System Check	Date	Frequency (MHz)	Targeted SAR-1g (W/kg)	Measured SAR-1g (W/kg)	normalized SAR-1g (W/kg)	Deviation (%)	Dipole S/N
Body	Dec. 21, 2019	2450	50.80	13.00	52.00	2.36	919
Body	Dec. 20, 2019	5200	69.80	6.96	69.60	-0.29	1160
Body	Dec. 20, 2019	5300	72.30	6.92	69.20	-4.29	1160
Body	Dec. 20, 2019	5500	76.20	7.69	76.90	0.92	1160
Body	Dec. 20, 2019	5600	77.70	7.94	79.40	2.19	1160
Body	Dec. 20, 2019	5800	76.60	7.41	74.10	-3.26	1160

## 4.3 SYSTEM CHECK PROCEDURE

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250mW (below 3GHz) or 100mW (3-6GHz). To adjust this power a power meter is used.

The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system ( $\pm 10\%$ ).

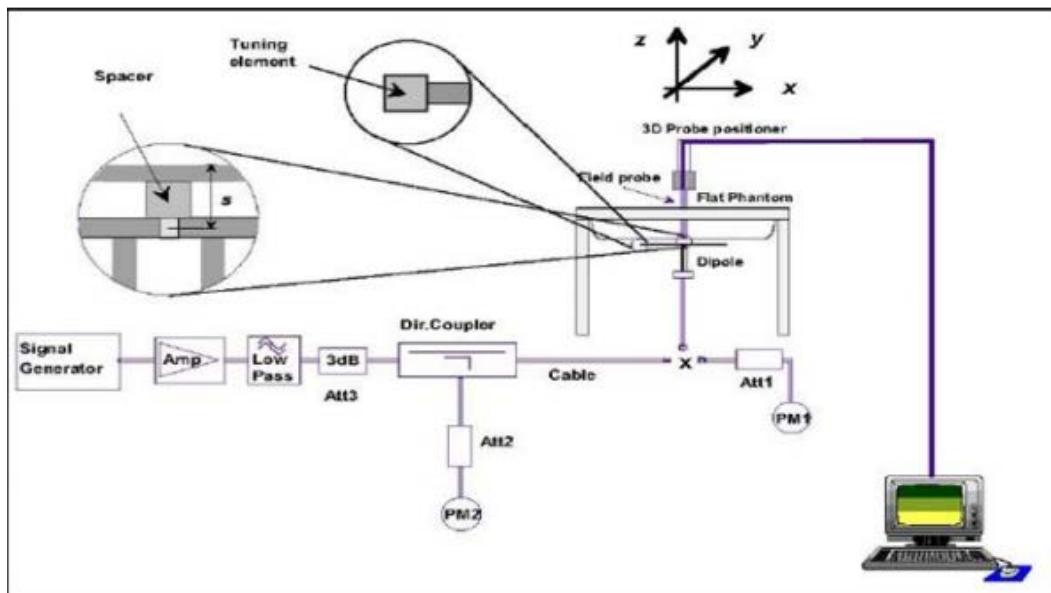

## 5. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

### 5.1 SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80 \text{ W/kg}$ ; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80 \text{ W/kg}$ , repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45 \text{ W/kg}$  ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5 \text{ W/kg}$  and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in section 7.2.

## 6. OPERATIONAL CONDITIONS DURING TEST

### 6.1 SAR TEST CONFIGURATION

#### 6.1.1 WIFI TEST CONFIGURATION

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal.

2.4G

Mode	802.11b	802.11g	802.11n HT20	802.11n HT40	VHT20	VHT40
Duty cycle	100%					
Crest factor	1					

5G

Mode	802.11a	802.11n HT20	802.11n HT40	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
Duty cycle	100%					
Crest factor	1					

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227 D01 are applied.

#### 6.1.1.1 2.4G SAR Test Requirements

##### 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8 \text{ W/kg}$ , no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8 \text{ W/kg}$ , SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2 \text{ W/kg}$ , SAR is required for the third channel; i.e., all channels require testing.

##### 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ .

##### SAR Test Requirements for OFDM configurations

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, each stand alone. And frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

### 6.1.1.2 5G SAR Test Requirements

#### ❖ U-NII-1 and U-NII-2A Band

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

#### ❖ U-NII-2C, U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, they must be considered for SAR testing.

To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels.<sup>11</sup> When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 6.1.1.3 OFDM transmission mode and SAR test channel selection

For the 2.4GHz and 5GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations (for example 802.11a, 802.11n and 802.11ac, or 802.11g and 802.11n, with the same channel bandwidth, modulation, and data rate, etc.), the lower order 802.11 mode (i.e. 802.11a then 802.11n and 802.11ac, or 802.11g then 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

### 6.1.1.4 Initial test configuration procedure

For OFDM, in both 2.4GHz and 5GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output powers is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output power will be the initial test configuration.


When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurement.

## 6.2 TEST POSITION

The location of the antenna inside EUT, please refer to Appendix E.

### 6.2.1 NOTEBOOK MODE

This DUT was tested in 2 different positions. They are back of keyboard and back of screen as illustrated below:

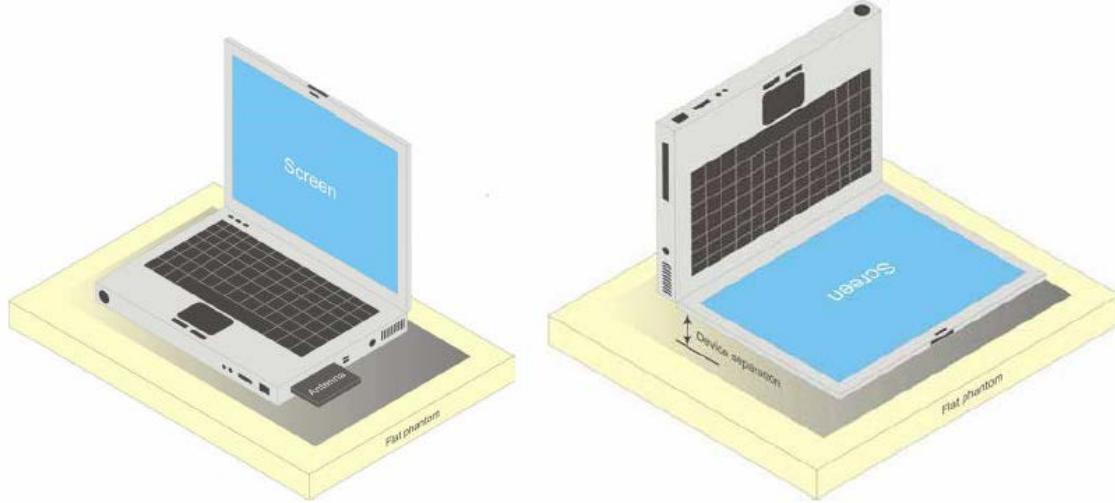


SAR testing to ensure safety of bystanders or people other than the user is not specifically covered in the harmonized standards but it is a consideration for declaration of compliance to the Directive. Therefore, the manufacturer is encouraged to ensure that the RF exposure and SAR assessments do cover the safety of all persons, during the normal intended use of the device. For example, this may apply to a device where normal intended use could locate the transmitting antenna at a safe distance from the user but a closer distance to other persons located or standing nearby.

Therefore, we tested the position at the back of the screen, which is bystander SAR. Since the integrated antenna is located at the back of the display screen, the test distance we tested is 25mm.

### 6.2.2 TABLET MODE

The device does not have telephone receiver. Next to the ear operation is not supported. So the additional Head SAR testing for this device is not required.

Body-worn operating configurations should be tested with positioned against a flat phantom in normal use configurations. The distance between the device and the phantom was kept 0mm.

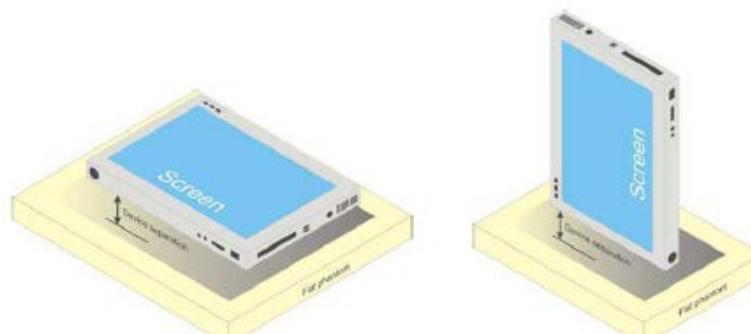

b) Tablet form factor portable computer

## 7. TEST RESULT

### 7.1 CONDUCTED POWER RESULTS

The default power measurement procedures are:

- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum tune-up power specified for production units.
  - 1) When the same highest maximum tune-up power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
  - 2) When the same highest maximum tune-up power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum tune-up power.
- c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

Power test of the other transmission configurations and channels are not required.

### 7.1.1 CONDUCTED POWER MEASUREMENTS OF WIFI 2.4G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
2.4G WIFI_1TX _ANT 1	802.11b	1	2412	1	18.00	<b>17.44</b>
		6	2437		18.00	<b>17.43</b>
		11	2462		18.00	<b>17.55</b>
		12	2467		14.00	13.68
		13	2472		10.00	9.85
	802.11g	1	2412	6	14.00	<b>13.79</b>
		2	2417		16.50	16.38
		3	2422		18.00	17.62
		6	2437		18.00	<b>17.68</b>
		9	2452		18.00	17.58
		10	2457		16.50	16.29
		11	2462		14.00	<b>13.76</b>
		12	2467		11.00	10.87
		13	2472		8.00	7.92
	802.11n HT20	1	2412	MCS0	14.00	13.82
		2	2417		16.50	16.26
		3	2422		18.00	17.55
		6	2437		18.00	17.61
		9	2452		18.00	17.57
		10	2457		16.50	16.34
		11	2462		14.00	13.72
		12	2467		11.00	10.84
		13	2472		8.00	7.85
		3	2422		14.00	Not Required
	802.11n HT40	4	2427	MCS0	17.00	Not Required
		6	2437		17.00	Not Required
		8	2447		17.00	Not Required
		9	2452		14.00	Not Required
		10	2457		11.00	Not Required
		11	2462		7.00	Not Required

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
2.4G WIFI_1TX _ANT 1	VHT20	1	2412	Nss1 MCS0	14.00	13.74
		2	2417		16.50	16.29
		3	2422		18.00	17.65
		6	2437		18.00	17.64
		9	2452		18.00	17.63
		10	2457		16.50	16.32
		11	2462		14.00	13.71
		12	2467		11.00	10.68
		13	2472		8.00	7.76
	VHT40	3	2422	Nss1 MCS0	14.00	Not Required
		4	2427		17.00	Not Required
		6	2437		17.00	Not Required
		8	2447		17.00	Not Required
		9	2452		14.00	Not Required
		10	2457		11.00	Not Required
		11	2462		7.00	Not Required

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
2.4G WIFI_1TX _ANT 2	802.11b	1	2412	1	18.00	<b>17.51</b>
		6	2437		18.00	<b>17.62</b>
		11	2462		18.00	<b>17.53</b>
		12	2467		14.00	13.81
		13	2472		10.00	9.63
	802.11g	1	2412	6	14.00	<b>13.82</b>
		2	2417		16.50	16.29
		3	2422		18.00	17.63
		6	2437		18.00	<b>17.72</b>
		9	2452		18.00	17.65
		10	2457		16.50	16.31
		11	2462		14.00	<b>13.69</b>
		12	2467		11.00	10.78
		13	2472		8.00	7.84
	802.11n HT20	1	2412	MCS0	14.00	13.72
		2	2417		16.50	16.34
		3	2422		18.00	17.68
		6	2437		18.00	17.69
		9	2452		18.00	17.68
		10	2457		16.50	16.25
		11	2462		14.00	13.76
		12	2467		11.00	10.81
		13	2472		8.00	7.80
		3	2422	MCS0	14.00	Not Required
		4	2427		17.00	Not Required
		6	2437		17.00	Not Required
		8	2447		17.00	Not Required
		9	2452		14.00	Not Required
		10	2457		11.00	Not Required
		11	2462		7.00	Not Required

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
2.4G WIFI_1TX _ANT 2	VHT20	1	2412	Nss1 MCS0	14.00	13.79
		2	2417		16.50	16.27
		3	2422		18.00	17.65
		6	2437		18.00	17.68
		9	2452		18.00	17.64
		10	2457		16.50	16.22
		11	2462		14.00	13.75
		12	2467		11.00	10.88
		13	2472		8.00	7.81
		3	2422		14.00	Not Required
VHT40	VHT40	4	2427	Nss1 MCS0	17.00	Not Required
		6	2437		17.00	Not Required
		8	2447		17.00	Not Required
		9	2452		14.00	Not Required
		10	2457		11.00	Not Required
		11	2462		7.00	Not Required

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT B Average Power(dBm)	ANT A Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
2.4G WIFI_2TX ANT 1+2	802.11b	1	2412	1	17.81	17.72	21.00	20.78
		6	2437		17.68	17.75	21.00	20.73
		11	2462		17.83	17.68	21.00	20.77
		12	2467		13.87	13.82	17.00	16.86
		13	2472		9.82	9.68	13.00	12.76
	802.11g	1	2412	6	13.85	13.75	17.00	16.81
		2	2417		17.84	17.81	21.00	20.84
		6	2437		17.78	17.74	21.00	20.77
		10	2457		17.82	17.69	21.00	20.77
		11	2462		13.84	13.63	17.00	16.75
		12	2467		10.83	10.72	14.00	13.79
		13	2472		7.78	7.65	11.00	10.73
	802.11n HT20	1	2412	MCS8	13.82	13.78	17.00	16.81
		2	2417		17.79	17.76	21.00	20.79
		6	2437		17.78	17.83	21.00	20.82
		10	2457		17.82	17.68	21.00	20.76
		11	2462		13.80	13.77	17.00	16.80
		12	2467		10.78	10.84	14.00	13.82
		13	2472		7.88	7.72	11.00	10.81
		3	2422		Not Required	Not Required	16.00	Not Required
	802.11n HT40	4	2427	MCS8	Not Required	Not Required	20.00	Not Required
		6	2437		Not Required	Not Required	20.00	Not Required
		8	2447		Not Required	Not Required	20.00	Not Required
		9	2452		Not Required	Not Required	17.00	Not Required
		10	2457		Not Required	Not Required	14.00	Not Required
		11	2462		Not Required	Not Required	10.00	Not Required

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT B Average Power(dBm)	ANT A Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
2.4G WIFI_2TX ANT 1+2	VHT20	1	2412	Nss1 MCS8	13.79	13.67	17.00	16.74
		2	2417		17.83	17.71	21.00	20.78
		6	2437		17.80	17.82	21.00	20.82
		10	2457		17.84	17.75	21.00	20.81
		11	2462		13.83	13.66	17.00	16.76
		12	2467		10.76	10.87	14.00	13.83
		13	2472		7.82	7.88	11.00	10.86
	VHT40	3	2422	Nss1 MCS8	Not Required	Not Required	16.00	Not Required
		4	2427		Not Required	Not Required	20.00	Not Required
		6	2437		Not Required	Not Required	20.00	Not Required
		8	2447		Not Required	Not Required	20.00	Not Required
		9	2452		Not Required	Not Required	17.00	Not Required
		10	2457		Not Required	Not Required	14.00	Not Required
		11	2462		Not Required	Not Required	10.00	Not Required

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Adj SAR = 1g Reported SAR x (802.11g  $P_{max}$  / 802.11b  $P_{max}$ ) = 1.399W/kg x (125.89mW / 125.89mW) = 1.399W/kg > 1.2W/kg, so SAR for OFDM modes (2.4GHz 802.11g) was required.
- 3) The tested channel results are marks in bold.

### 7.1.2 CONDUCTED POWER MEASUREMENTS OF WIFI 5.2G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.2G WIFI_1TX _ANT 1	802.11a	36	5180	6	14.00	13.67
		40	5200		14.00	13.75
		44	5220		14.00	13.71
		48	5240		14.00	13.69
	802.11n HT20	36	5180	MCS0	14.00	13.75
		40	5200		14.00	13.74
		44	5220		14.00	13.78
		48	5240		14.00	13.82
	802.11n HT40	38	5190	MCS0	14.00	13.76
		46	5230		14.00	13.69
	802.11ac VHT20	36	5180	MCS0	14.00	13.72
		40	5200		14.00	13.69
		44	5220		14.00	13.81
		48	5240		14.00	13.78
	802.11ac VHT40	38	5190	MCS0	14.00	13.79
		46	5230		14.00	13.72
	802.11ac VHT80	42	5210	MCS0	14.00	<b>13.89</b>

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.2G WIFI_1TX _ANT 2	802.11a	36	5180	6	13.00	12.78
		40	5200		13.00	12.74
		44	5220		13.00	12.72
		48	5240		13.00	12.77
	802.11n HT20	36	5180	MCS0	13.00	12.79
		40	5200		13.00	12.82
		44	5220		13.00	12.78
		48	5240		13.00	12.75
	802.11n HT40	38	5190	MCS0	13.00	12.70
		46	5230		13.00	12.79
	802.11ac VHT20	36	5180	MCS0	13.00	12.76
		40	5200		13.00	12.67
		44	5220		13.00	12.71
		48	5240		13.00	12.75
	802.11ac VHT40	38	5190	MCS0	13.00	12.69
		46	5230		13.00	12.72
	802.11ac VHT80	42	5210	MCS0	13.00	<b>12.83</b>

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power(dBm)	ANT 2 Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
5.2G WIFI 2TX ANT 1+2	802.11a	36	5180	6	11.85	11.77	15.00	14.82
		40	5200		11.82	11.79	15.00	14.82
		44	5220		11.79	11.75	15.00	14.78
		48	5240		11.81	11.72	15.00	14.78
	802.11n HT20	36	5180	MCS8	11.82	11.79	15.00	14.82
		40	5200		11.79	11.77	15.00	14.79
		44	5220		11.74	11.72	15.00	14.74
		48	5240		11.68	11.76	15.00	14.73
	802.11n HT40	38	5190	MCS8	11.75	11.82	15.00	14.80
		46	5230		11.69	11.73	15.00	14.72
	802.11ac VHT20	36	5180	MCS8	11.84	11.78	15.00	14.82
		40	5200		11.78	11.75	15.00	14.78
		44	5220		11.69	11.82	15.00	14.77
		48	5240		11.72	11.78	15.00	14.76
	802.11ac VHT40	38	5190	MCS8	11.84	11.76	15.00	14.81
		46	5230		11.78	11.83	15.00	14.82
	802.11ac VHT80	42	5210	MCS8	11.75	11.68	15.00	14.73

Note: 1) The Average conducted power of 5.2G WiFi is measured with RMS detector.

2) The tested channel results are marks in bold.

### 7.1.3 CONDUCTED POWER MEASUREMENTS OF WIFI 5.3G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.3G WIFI_1TX _ANT 1	802.11a	52	5260	6	14.00	13.82
		56	5280		14.00	13.78
		60	5300		14.00	13.74
		64	5320		14.00	13.75
	802.11n HT20	52	5260	MCS0	14.00	13.85
		56	5280		14.00	13.83
		60	5300		14.00	13.75
		64	5320		14.00	13.78
	802.11n HT40	54	5270	MCS0	14.00	13.82
		62	5310		14.00	13.76
	802.11ac VHT20	52	5260	MCS0	14.00	13.75
		56	5280		14.00	13.82
		60	5300		14.00	13.67
		64	5320		14.00	13.79
	802.11ac VHT40	54	5270	MCS0	14.00	13.75
		62	5310		14.00	13.78
	802.11ac VHT80	58	5290	MCS0	14.00	<b>13.89</b>

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.3G WIFI_1TX _ANT 2	802.11a	52	5260	6	14.00	13.87
		56	5280		14.00	13.78
		60	5300		14.00	13.72
		64	5320		14.00	13.74
	802.11n HT20	52	5260	MCS0	14.00	13.76
		56	5280		14.00	13.81
		60	5300		14.00	13.69
		64	5320		14.00	13.73
	802.11n HT40	54	5270	MCS0	14.00	13.75
		62	5310		14.00	13.78
	802.11ac VHT20	52	5260	MCS0	14.00	13.68
		56	5280		14.00	13.72
		60	5300		14.00	13.83
		64	5320		14.00	13.76
	802.11ac VHT40	54	5270	MCS0	14.00	13.81
		62	5310		14.00	13.72
	802.11ac VHT80	58	5290	MCS0	14.00	<b>13.91</b>

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power(dBm)	ANT 2 Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
5.3G WIFI 2TX ANT 1+2	802.11a	52	5260	6	13.84	13.77	17.00	16.82
		56	5280		13.77	13.84	17.00	16.82
		60	5300		13.69	13.78	17.00	16.75
		64	5320		13.72	13.79	17.00	16.77
	802.11n HT20	52	5260	MCS8	13.84	13.82	17.00	16.84
		56	5280		13.82	13.76	17.00	16.80
		60	5300		13.75	13.84	17.00	16.81
		64	5320		13.79	13.78	17.00	16.80
	802.11n HT40	54	5270	MCS8	13.82	13.80	17.00	16.82
		62	5310		13.78	13.74	17.00	16.77
	802.11ac VHT20	52	5260	MCS8	13.80	13.79	17.00	16.81
		56	5280		13.76	13.77	17.00	16.78
		60	5300		13.72	13.82	17.00	16.78
		64	5320		13.69	13.75	17.00	16.73
	802.11ac VHT40	54	5270	MCS8	13.83	11.82	17.00	15.95
		62	5310		13.76	11.73	17.00	15.87
	802.11ac VHT80	58	5290	MCS8	13.74	13.73	17.00	16.75

Note: 1) The Average conducted power of 5.3G WiFi is measured with RMS detector.

2) The tested channel results are marks in bold.

#### 7.1.4 CONDUCTED POWER MEASUREMENTS OF WIFI 5.6G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.6G WIFI_1TX _ANT 1	802.11a	100	5500	6	14.00	13.72
		104	5520		14.00	13.80
		108	5540		14.00	13.76
		112	5560		14.00	13.59
		116	5580		14.00	13.64
		132	5660		14.00	13.77
		136	5680		14.00	13.68
		140	5700		14.00	13.79
	802.11n HT20	100	5500	MCS0	14.00	13.67
		104	5520		14.00	13.75
		108	5540		14.00	13.81
		112	5560		14.00	13.74
		116	5580		14.00	13.68
		132	5660		14.00	13.81
		136	5680		14.00	13.76
		140	5700		14.00	13.68
	802.11n HT40	102	5510	MCS0	14.00	13.79
		110	5550		14.00	13.81
		118	5590		14.00	13.82
		126	5630		14.00	13.78
		134	5670		14.00	13.75
	802.11ac VHT20	100	5500	MCS0	14.00	13.77
		104	5520		14.00	13.68
		108	5540		14.00	13.65
		112	5560		14.00	13.73
		116	5580		14.00	13.69
		132	5660		14.00	13.82
		136	5680		14.00	13.79
		140	5700		14.00	13.74
	802.11ac VHT40	102	5510	MCS0	14.00	13.79
		110	5550		14.00	13.81
		118	5590		14.00	13.75
		126	5630		14.00	13.78
		134	5670		14.00	13.79
	802.11ac VHT80	106	5530	MCS0	14.00	<b>13.84</b>
		122	5610		14.00	<b>13.76</b>

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.6G WIFI_1TX _ANT 2	802.11a	100	5500	6	13.00	12.77
		104	5520		13.00	12.69
		108	5540		13.00	12.81
		112	5560		13.00	12.75
		116	5580		13.00	12.73
		132	5660		13.00	12.83
		136	5680		13.00	12.76
		140	5700		13.00	12.79
	802.11n HT20	100	5500	MCS0	13.00	12.77
		104	5520		13.00	12.82
		108	5540		13.00	12.75
		112	5560		13.00	12.79
		116	5580		13.00	12.72
		132	5660		13.00	12.76
		136	5680		13.00	12.74
		140	5700		13.00	12.68
	802.11n HT40	102	5510	MCS0	13.00	12.75
		110	5550		13.00	12.78
		118	5590		13.00	12.69
		126	5630		13.00	12.71
		134	5670		13.00	12.75
	802.11ac VHT20	100	5500	MCS0	13.00	12.77
		104	5520		13.00	12.84
		108	5540		13.00	12.79
		112	5560		13.00	12.75
		116	5580		13.00	12.69
		132	5660		13.00	12.78
		136	5680		13.00	12.74
		140	5700		13.00	12.83
	802.11ac VHT40	102	5510	MCS0	13.00	12.71
		110	5550		13.00	12.78
		118	5590		13.00	12.82
		126	5630		13.00	12.76
		134	5670		13.00	12.73
	802.11ac VHT80	106	5530	MCS0	13.00	<b>12.88</b>
		122	5610		13.00	<b>12.86</b>

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power(dBm)	ANT 2 Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
5.6G WIFI 2TX ANT 1+2	802.11a	100	5500	6	12.81	12.76	16.00	15.80
		104	5520		12.84	12.67	16.00	15.77
		108	5540		12.79	12.64	16.00	15.73
		112	5560		12.75	12.73	16.00	15.75
		116	5580		12.69	12.75	16.00	15.73
		132	5660		12.77	12.84	16.00	15.82
		136	5680		12.72	12.76	16.00	15.75
		140	5700		12.74	12.81	16.00	15.79
	802.11n HT20	100	5500	MCS8	12.85	12.78	16.00	15.83
		104	5520		12.82	12.76	16.00	15.80
		108	5540		12.76	12.81	16.00	15.80
		112	5560		12.73	12.69	16.00	15.72
		116	5580		12.69	12.74	16.00	15.73
		132	5660		12.75	12.68	16.00	15.73
		136	5680		12.82	12.66	16.00	15.75
		140	5700		12.78	12.81	16.00	15.81
802.11n HT40	102	5510	MCS8	12.85	12.78	16.00	15.83	
	110	5550		12.76	12.73	16.00	15.76	
	118	5590		12.84	12.69	16.00	15.78	
	126	5630		12.79	12.81	16.00	15.81	
	134	5670		12.77	12.78	16.00	15.79	
802.11ac VHT20	100	5500	MCS8	12.82	12.78	16.00	15.81	
	104	5520		12.77	12.76	16.00	15.78	
	108	5540		12.75	12.69	16.00	15.73	
	112	5560		12.68	12.74	16.00	15.72	
	116	5580		12.71	12.82	16.00	15.78	
	132	5660		12.80	12.77	16.00	15.80	
	136	5680		12.78	12.81	16.00	15.81	
	140	5700		12.75	12.79	16.00	15.78	
802.11ac VHT40	102	5510	MCS8	12.85	12.80	16.00	15.84	
	110	5550		12.81	12.76	16.00	15.80	
	118	5590		12.76	12.77	16.00	15.78	
	126	5630		12.75	12.72	16.00	15.75	
	134	5670		12.72	12.69	16.00	15.72	
802.11ac VHT80	106	5530	MCS8	12.78	12.75	16.00	15.78	
	122	5610		12.76	12.82	16.00	15.80	

Note: 1) The Average conducted power of 5.6G WiFi is measured with RMS detector.

2) The tested channel results are marks in bold.

## 7.1.5 CONDUCTED POWER MEASUREMENTS OF WIFI 5.8G

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.8G WIFI_1TX _ANT 1	802.11a	149	5745	6	14.00	13.75
		153	5765		14.00	13.82
		157	5785		14.00	13.78
		161	5805		14.00	13.73
		165	5825		14.00	13.84
	802.11n HT20	149	5745	MCS0	14.00	13.69
		153	5765		14.00	13.82
		157	5785		14.00	13.79
		161	5805		14.00	13.75
		165	5825		14.00	13.71
	802.11n HT40	151	5755	MCS0	14.00	13.69
		159	5795		14.00	13.73
	802.11ac VHT20	149	5745	MCS0	14.00	13.68
		153	5765		14.00	13.76
		157	5785		14.00	13.72
		161	5805		14.00	13.77
		165	5825		14.00	13.82
	802.11ac VHT40	151	5755	MCS0	14.00	13.83
		159	5795		14.00	13.72
	802.11ac VHT80	155	5775	MCS0	14.00	<b>13.77</b>

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.8G WIFI_1TX _ANT 2	802.11a	149	5745	6	14.00	13.81
		153	5765		14.00	13.76
		157	5785		14.00	13.78
		161	5805		14.00	13.79
		165	5825		14.00	13.82
	802.11n HT20	149	5745	MCS0	14.00	13.77
		153	5765		14.00	13.68
		157	5785		14.00	13.74
		161	5805		14.00	13.67
		165	5825		14.00	13.72
	802.11n HT40	151	5755	MCS0	14.00	13.68
		159	5795		14.00	13.76
	802.11ac VHT20	149	5745	MCS0	14.00	13.78
		153	5765		14.00	13.75
		157	5785		14.00	13.67
		161	5805		14.00	13.80
		165	5825		14.00	13.77
	802.11ac VHT40	151	5755	MCS0	14.00	13.72
		159	5795		14.00	13.68
	802.11ac VHT80	155	5775	MCS0	14.00	<b>13.86</b>

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT 1 Average Power(dBm)	ANT 2 Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
5.8G WIFI 2TX ANT 1+2	802.11a	149	5745	6	13.83	13.82	17.00	16.84
		153	5765		13.78	13.79	17.00	16.80
		157	5785		13.81	13.76	17.00	16.80
		161	5805		13.73	13.69	17.00	16.72
		165	5825		13.75	13.75	17.00	16.76
	802.11n HT20	149	5745	MCS8	13.75	13.78	17.00	16.78
		153	5765		13.78	13.79	17.00	16.80
		157	5785		13.77	13.84	17.00	16.82
		161	5805		13.68	13.71	17.00	16.71
		165	5825		13.76	13.68	17.00	16.73
	802.11n HT40	151	5755	MCS8	13.82	13.78	17.00	16.81
		159	5795		13.77	13.75	17.00	16.77
	802.11ac VHT20	149	5745	MCS8	13.78	13.82	17.00	16.81
		153	5765		13.74	13.77	17.00	16.77
		157	5785		13.71	13.72	17.00	16.73
		161	5805		13.75	13.75	17.00	16.76
		165	5825		13.72	13.68	17.00	16.71
	802.11ac VHT40	151	5755	MCS8	13.81	13.75	17.00	16.79
		159	5795		13.74	13.82	17.00	16.79
	802.11ac VHT80	155	5775	MCS8	13.77	13.78	17.00	16.79

Note: 1) The Average conducted power of 5.8G WiFi is measured with RMS detector.  
2) The tested channel results are marks in bold.

**7.1.6 CONDUCTED POWER MEASUREMENTS OF BT**

BT	Average Conducted Power(dBm)			
	Max.	CH0	CH39	CH78
	Tune up	2402MHz	2441MHz	2480MHz
DH5	7.00	<b>5.25</b>	<b>5.39</b>	<b>5.24</b>
2DH5	6.50	4.94	4.77	4.68
3DH5	6.50	4.96	4.75	4.71

BLE(1M)	Average Conducted Power(dBm)			
	Max.	CH0	CH19	CH39
	Tune up	2402MHz	2441MHz	2480MHz
	6.00	4.49	4.66	4.47

BLE(2M)	Average Conducted Power(dBm)			
	Max.	CH0	CH19	CH39
	Tune up	2404MHz	2440MHz	2478MHz
	4.50	2.93	3.04	2.85

Note: The tested channel results are marks in bold.

## 7.2 SAR TEST RESULTS

### General Notes:

- 1) Per KDB447498 D01, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:  $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$ . When the maximum output power variation across the required test channels is  $> \frac{1}{2} \text{ dB}$ , instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8 \text{ W/kg}$ ; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45 \text{ W/kg}$ , only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than  $9 \text{ cm} \times 5 \text{ cm}$ , so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is  $\leq 1.2 \text{ W/kg}$ , no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is  $> 1.5 \text{ W/kg}$ , or  $> 7.0 \text{ W/kg}$  for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

### WLAN Notes:

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When the reported SAR of the initial test position is  $\leq 0.4 \text{ W/kg}$ , further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8 \text{ W/kg}$  or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHZ WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11n, VHT) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.1 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 for 5GHZ WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed power. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg. See Section 7.1 for more information.

### 7.2.1 SAR MEASUREMENT RESULT

#### 1. SAR Measurement Result of 2.4G WiFi

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Platform	Ant	Ant Vendor	Battery	Data Rate	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR
T01	802.11b	6	Back of Keyboard	0	Notebook	1	southstar	1	1	18	17.43	0.02	0.568	0.266	0.648
T02	802.11b	6	Back of Screen	2.5	Notebook	1	southstar	1	1	18	17.43	0.05	0.141	0.064	0.161
T03	802.11b	6	Back Side	0	Tablet	1	southstar	1	1	18	17.43	0.01	0.646	0.319	0.737
T04	802.11b	6	Bottom Side	0	Tablet	1	southstar	1	1	18	17.43	-0.04	1.200	0.545	1.368
T05	802.11b	1	Bottom Side	0	Tablet	1	southstar	1	1	18	17.44	-0.1	<b>1.230</b>	<b>0.559</b>	<b>1.399</b>
T06	802.11b	11	Bottom Side	0	Tablet	1	southstar	1	1	18	17.55	-0.11	1.210	0.545	1.342
T07	802.11b	1	Bottom Side	0	Tablet	1	INPAQ	1	1	18	17.42	0.06	1.190	0.538	1.360
T08	802.11b	1	Bottom Side	0	Tablet	1	southstar	2	1	18	17.42	0.09	1.220	0.547	1.394
T09	802.11b	1	Bottom Side (repeated)	0	Tablet	1	southstar	1	1	18	17.44	-0.12	1.190	0.547	1.354
T10	802.11b	6	Back of Keyboard	0	Notebook	2	southstar	1	1	18	17.62	0.02	0.219	0.108	0.239
T11	802.11b	6	Back of Screen	2.5	Notebook	2	southstar	1	1	18	17.62	-0.01	0.082	0.046	0.089
T12	802.11b	6	Back Side	0	Tablet	2	southstar	1	1	18	17.62	0.05	0.191	0.099	0.208
T13	802.11b	6	Bottom Side	0	Tablet	2	southstar	1	1	18	17.62	-0.08	1.220	0.529	1.332
T14	802.11b	1	Bottom Side	0	Tablet	2	southstar	1	1	18	17.51	-0.02	<b>1.240</b>	<b>0.541</b>	<b>1.388</b>
T15	802.11b	11	Bottom Side	0	Tablet	2	southstar	1	1	18	17.53	-0.15	1.240	0.531	1.382
T16	802.11b	1	Bottom Side	0	Tablet	2	INPAQ	1	1	18	17.51	0.01	1.200	0.523	1.343
T17	802.11b	1	Bottom Side	0	Tablet	2	southstar	2	1	18	17.51	-0.07	1.180	0.519	1.321
T18	802.11b	1	Bottom Side (repeated)	0	Tablet	2	southstar	1	1	18	17.51	-0.04	1.220	0.534	1.366
T85	802.11g	6	Back of Keyboard	0	Notebook	1	southstar	1	1	18	17.68	0.02	0.598	0.277	0.644
T86	802.11g	6	Back of Screen	2.5	Notebook	1	southstar	1	1	18	17.68	-0.06	0.115	0.064	0.124
T87	802.11g	6	Back Side	0	Tablet	1	southstar	1	1	18	17.68	0.02	0.679	0.323	0.731
T88	802.11g	6	Bottom Side	0	Tablet	1	southstar	1	1	18	17.68	-0.02	<b>1.240</b>	<b>0.558</b>	<b>1.335</b>
T89	802.11g	1	Bottom Side	0	Tablet	1	southstar	1	1	14	13.79	0.01	0.592	0.262	0.621
T90	802.11g	11	Bottom Side	0	Tablet	1	southstar	1	1	14	13.76	0.09	0.686	0.299	0.725
T91	802.11g	6	Bottom Side	0	Tablet	1	INPAQ	1	1	18	17.68	-0.07	1.190	0.524	1.281
T92	802.11g	6	Bottom Side	0	Tablet	1	southstar	2	1	18	17.68	0.03	1.170	0.508	1.259
T93	802.11g	6	Bottom Side (repeated)	0	Tablet	1	southstar	1	1	18	17.68	0.01	1.210	0.552	1.303
T94	802.11g	6	Back of Keyboard	0	Notebook	2	southstar	1	1	18	17.72	0.04	0.327	0.154	0.349
T95	802.11g	6	Back of Screen	2.5	Notebook	2	southstar	1	1	18	17.72	-0.02	0.141	0.076	0.150
T96	802.11g	6	Back Side	0	Tablet	2	southstar	1	1	18	17.72	0.05	0.414	0.201	0.442
T97	802.11g	6	Bottom Side	0	Tablet	2	southstar	1	1	18	17.72	-0.09	<b>1.210</b>	<b>0.521</b>	<b>1.291</b>
T98	802.11g	1	Bottom Side	0	Tablet	2	southstar	1	1	14	13.82	0.01	0.717	0.293	0.747
T99	802.11g	11	Bottom Side	0	Tablet	2	southstar	1	1	14	13.69	0.09	0.765	0.326	0.822
T100	802.11g	6	Bottom Side	0	Tablet	2	INPAQ	1	1	18	17.72	-0.12	1.180	0.513	1.259
T101	802.11g	6	Bottom Side	0	Tablet	2	southstar	2	1	18	17.72	0.06	1.150	0.495	1.227
T102	802.11g	6	Bottom Side (repeated)	0	Tablet	2	southstar	1	1	18	17.72	0.03	1.170	0.511	1.248

Note: The value with boldface is the maximum SAR Value of each test band.

## 2. SAR Measurement Result of BT

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Platform	Ant	Ant Vendor	Battery	Data Rate	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR
T19	BT/DH5	39	Back of Keyboard	0	Notebook	1	southstar	1	1	7	5.39	0.02	0.007	0.004	0.011
T20	BT/DH5	39	Back of Screen	2.5	Notebook	1	southstar	1	1	7	5.39	0.09	0.005	0.003	0.007
T21	BT/DH5	39	Back Side	0	Tablet	1	southstar	1	1	7	5.39	-0.07	0.009	0.005	0.013
T22	BT/DH5	39	Bottom Side	0	Tablet	1	southstar	1	1	7	5.39	0.06	0.047	0.021	0.068
T23	BT/DH5	0	Bottom Side	0	Tablet	1	southstar	1	1	7	5.25	0.03	0.045	0.020	0.068
T24	BT/DH5	78	Bottom Side	0	Tablet	1	southstar	1	1	7	5.24	0.07	<b>0.054</b>	<b>0.024</b>	<b>0.080</b>
T25	BT/DH5	78	Bottom Side	0	Tablet	1	INPAQ	1	1	7	5.24	-0.01	0.052	0.021	0.078
T26	BT/DH5	78	Bottom Side	0	Tablet	1	southstar	2	1	7	5.24	0.05	0.050	0.020	0.075

Note: The value with boldface is the maximum SAR Value of each test band.

## 3. SAR Measurement Result of 5G WiFi

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Platform	Ant	Ant Vendor	Battery	Data Rate	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR
T28	802.11ac VHT80	42	Back of Keyboard	0	Notebook	1	southstar	1	6	14	13.89	-0.02	0.276	0.077	0.283
T29	802.11ac VHT80	42	Back of Screen	2.5	Notebook	1	southstar	1	6	14	13.89	0.01	0.046	0.022	0.047
T30	802.11ac VHT80	42	Back Side	0	Tablet	1	southstar	1	6	14	13.89	-0.07	0.171	0.060	0.175
T31	802.11ac VHT80	42	Bottom Side	0	Tablet	1	southstar	1	6	14	13.89	0.18	<b>1.220</b>	<b>0.312</b>	<b>1.251</b>
T32	802.11ac VHT80	42	Bottom Side	0	Tablet	1	INPAQ	1	6	14	13.89	0.02	1.170	0.297	1.200
T33	802.11ac VHT80	42	Bottom Side	0	Tablet	1	southstar	2	6	14	13.89	-0.01	1.190	0.306	1.221
T34	802.11ac VHT80	42	Bottom Side (repeated)	0	Tablet	1	southstar	1	6	14	13.89	0.15	1.210	0.308	1.241
T35	802.11ac VHT80	42	Back of Keyboard	0	Notebook	2	southstar	1	6	13	12.83	0.01	0.269	0.092	0.280
T36	802.11ac VHT80	42	Back of Screen	2.5	Notebook	2	southstar	1	6	13	12.83	-0.02	0.042	0.020	0.043
T37	802.11ac VHT80	42	Back Side	0	Tablet	2	southstar	1	6	13	12.83	-0.09	0.173	0.041	0.180
T38	802.11ac VHT80	42	Bottom Side	0	Tablet	2	southstar	1	6	13	12.83	0.06	<b>1.320</b>	<b>0.318</b>	<b>1.373</b>
T39	802.11ac VHT80	42	Bottom Side	0	Tablet	2	INPAQ	1	6	13	12.83	0.04	1.270	0.299	1.321
T40	802.11ac VHT80	42	Bottom Side	0	Tablet	2	southstar	2	6	13	12.83	-0.05	1.290	0.305	1.341
T41	802.11ac VHT80	42	Bottom Side (repeated)	0	Tablet	2	southstar	1	6	13	12.83	0.03	1.290	0.309	1.341
T42	802.11ac VHT80	58	Back of Keyboard	0	Notebook	1	southstar	1	6	14	13.89	0.02	0.306	0.094	0.314
T43	802.11ac VHT80	58	Back of Screen	2.5	Notebook	1	southstar	1	6	14	13.89	-0.07	0.050	0.028	0.051
T44	802.11ac VHT80	58	Back Side	0	Tablet	1	southstar	1	6	14	13.89	0.01	0.210	0.069	0.215
T45	802.11ac VHT80	58	Bottom Side	0	Tablet	1	southstar	1	6	14	13.89	-0.12	<b>1.300</b>	<b>0.335</b>	<b>1.333</b>
T46	802.11ac VHT80	58	Bottom Side	0	Tablet	1	INPAQ	1	6	14	13.89	0.09	1.250	0.322	1.282
T47	802.11ac VHT80	58	Bottom Side	0	Tablet	1	southstar	2	6	14	13.89	0.01	1.220	0.313	1.251
T48	802.11ac VHT80	58	Bottom Side (repeated)	0	Tablet	1	southstar	1	6	14	13.89	-0.06	1.240	0.316	1.272
T49	802.11ac VHT80	58	Back of Keyboard	0	Notebook	2	southstar	1	6	14	13.91	0.04	0.353	0.157	0.360
T50	802.11ac VHT80	58	Back of Screen	2.5	Notebook	2	southstar	1	6	14	13.91	-0.02	0.047	0.023	0.048
T51	802.11ac VHT80	58	Back Side	0	Tablet	2	southstar	1	6	14	13.91	0.09	0.162	0.052	0.165
T52	802.11ac VHT80	58	Bottom Side	0	Tablet	2	southstar	1	6	14	13.91	0.1	<b>1.270</b>	<b>0.406</b>	<b>1.297</b>
T53	802.11ac VHT80	58	Bottom Side	0	Tablet	2	INPAQ	1	6	14	13.91	0.07	1.230	0.389	1.256
T54	802.11ac VHT80	58	Bottom Side	0	Tablet	2	southstar	2	6	14	13.91	-0.01	1.190	0.368	1.215
T55	802.11ac VHT80	58	Bottom Side (repeated)	0	Tablet	2	southstar	1	6	14	13.91	0.03	1.250	0.397	1.276

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Platform	Ant	Ant Vendor	Battery	Data Rate	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR
T56	802.11ac VHT80	106	Back of Keyboard	0	Notebook	1	southstar	1	6	14	13.84	-0.09	0.262	0.116	0.272
T57	802.11ac VHT80	106	Back of Screen	2.5	Notebook	1	southstar	1	6	14	13.84	0.12	0.036	0.017	0.037
T58	802.11ac VHT80	106	Back Side	0	Tablet	1	southstar	1	6	14	13.84	-0.02	0.201	0.093	0.209
T59	802.11ac VHT80	106	Bottom Side	0	Tablet	1	southstar	1	6	14	13.84	0.03	<b>1.230</b>	<b>0.438</b>	<b>1.276</b>
T60	802.11ac VHT80	122	Bottom Side	0	Tablet	1	southstar	1	6	14	13.76	0.03	1.180	0.338	1.247
T61	802.11ac VHT80	122	Bottom Side	0	Tablet	1	INPAQ	1	6	14	13.76	-0.02	1.170	0.334	1.236
T62	802.11ac VHT80	106	Bottom Side	0	Tablet	1	southstar	2	6	14	13.84	0.05	1.210	0.413	1.255
T63	802.11ac VHT80	106	Bottom Side (repeated)	0	Tablet	1	southstar	1	6	14	13.84	0.04	1.200	0.423	1.245
T64	802.11ac VHT80	106	Back of Keyboard	0	Notebook	2	southstar	1	6	13	12.88	0.01	0.377	0.18	0.388
T65	802.11ac VHT80	106	Back of Screen	2.5	Notebook	2	southstar	1	6	13	12.88	-0.08	0.041	0.019	0.042
T66	802.11ac VHT80	106	Back Side	0	Tablet	2	southstar	1	6	13	12.88	0.05	0.262	0.122	0.269
T67	802.11ac VHT80	106	Bottom Side	0	Tablet	2	southstar	1	6	13	12.88	0.06	<b>1.290</b>	<b>0.319</b>	<b>1.326</b>
T68	802.11ac VHT80	122	Bottom Side	0	Tablet	2	southstar	1	6	13	12.86	0.14	1.230	0.300	1.270
T69	802.11ac VHT80	122	Bottom Side	0	Tablet	2	INPAQ	1	6	13	12.86	0.04	1.250	0.304	1.291
T70	802.11ac VHT80	106	Bottom Side	0	Tablet	2	southstar	2	6	13	12.88	-0.02	1.220	0.297	1.254
T71	802.11ac VHT80	106	Bottom Side (repeated)	0	Tablet	2	southstar	1	6	13	12.88	0.03	1.250	0.304	1.285
T72	802.11ac VHT80	155	Back of Keyboard	0	Notebook	1	southstar	1	6	14	13.77	-0.04	0.254	0.115	0.268
T73	802.11ac VHT80	155	Back of Screen	2.5	Notebook	1	southstar	1	6	14	13.77	0.01	0.052	0.026	0.055
T74	802.11ac VHT80	155	Back Side	0	Tablet	1	southstar	1	6	14	13.77	-0.01	0.248	0.121	0.261
T75	802.11ac VHT80	155	Bottom Side	0	Tablet	1	southstar	1	6	14	13.77	0.18	<b>1.230</b>	<b>0.445</b>	<b>1.297</b>
T76	802.11ac VHT80	155	Bottom Side	0	Tablet	1	INPAQ	1	6	14	13.77	0.02	1.190	0.419	1.255
T77	802.11ac VHT80	155	Bottom Side	0	Tablet	1	southstar	2	6	14	13.77	-0.07	1.200	0.420	1.265
T78	802.11ac VHT80	155	Bottom Side (repeated)	0	Tablet	1	southstar	1	6	14	13.77	0.08	1.190	0.427	1.255
T79	802.11ac VHT80	155	Back of Keyboard	0	Notebook	2	southstar	1	6	14	13.86	0.02	0.299	0.136	0.309
T80	802.11ac VHT80	155	Back of Screen	2.5	Notebook	2	southstar	1	6	14	13.86	-0.1	0.057	0.027	0.059
T81	802.11ac VHT80	155	Back Side	0	Tablet	2	southstar	1	6	14	13.86	0.06	0.22	0.103	0.227
T82	802.11ac VHT80	155	Bottom Side	0	Tablet	2	southstar	1	6	14	13.86	-0.04	<b>1.250</b>	<b>0.443</b>	<b>1.291</b>
T83	802.11ac VHT80	155	Bottom Side	0	Tablet	2	INPAQ	1	6	14	13.86	0.01	1.210	0.435	1.250
T84	802.11ac VHT80	155	Bottom Side	0	Tablet	2	southstar	2	6	14	13.86	0.07	1.190	0.432	1.229
T85	802.11ac VHT80	155	Bottom Side (repeated)	0	Tablet	2	southstar	1	6	14	13.86	-0.01	1.220	0.428	1.260

Note: The value with boldface is the maximum SAR Value of each test band.

## 7.3 MULTIPLE TRANSMITTER EVALUATION

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06.

The location of the antenna inside EUT, please refer to Appendix E.

### 7.3.1 STAND-ALONE SAR TEST EXCLUSION

Per FCC KDB 447498D01, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Body
1	WLAN 2.4GHz Ant 1 + WLAN 2.4GHz Ant 2	Yes
2	WLAN 5.2GHz Ant 1 + WLAN 5.2GHz Ant 2	Yes
3	WLAN 5.3GHz Ant 1 + WLAN 5.3GHz Ant 2	Yes
4	WLAN 5.6GHz Ant 1 + WLAN 5.6GHz Ant 2	Yes
5	WLAN 5.8GHz Ant 1 + WLAN 5.8GHz Ant 2	Yes
6	BT Ant 1 + WLAN 2.4GHz Ant 2	Yes
7	BT Ant 1 + WLAN 5.2GHz Ant 2	Yes
8	BT Ant 1 + WLAN 5.3GHz Ant 2	Yes
9	BT Ant 1 + WLAN 5.6GHz Ant 2	Yes
10	BT Ant 1 + WLAN 5.8GHz Ant 2	Yes

Note: Only the Ant 1 supports BT function.

### 7.3.2 SIMULTANEOUS TRANSMISSION CONDITIONS

About WIFI and Bluetooth transmit simultaneously

Band	Position	Back of Keyboard	Back of Screen	Back Side	Bottom Side
ANT 1	2.4G WLAN	0.648	0.161	0.737	1.399
	5.2G WLAN	0.283	0.047	0.175	1.251
	5.3G WLAN	0.314	0.051	0.215	1.333
	5.6G WLAN	0.272	0.037	0.209	1.276
	5.8G WLAN	0.268	0.055	0.261	1.297
	Bluetooth	0.011	0.007	0.013	0.080
ANT 2	2.4G WLAN	0.349	0.150	0.442	1.388
	5.2G WLAN	0.280	0.043	0.180	1.373
	5.3G WLAN	0.360	0.048	0.165	1.297
	5.6G WLAN	0.388	0.042	0.269	1.326
	5.8G WLAN	0.309	0.059	0.227	1.291
MAX $\sum \text{SAR}_{1g}$		0.997	0.311	1.179	Refer to SPLSR results

Test Position	Reported $\text{SAR}_{1g}$	Ant 2 WiFi 2.4G	Ant 2 WiFi 5.2G	Ant 2 WiFi 5.3G	Ant 2 WiFi 5.6G	Ant 2 WiFi 5.8G	MAX $\sum \text{SAR}_{1g}$
Bottom Side	Ant 1 WiFi 2.4G	2.787	/	/	/	/	Refer to SPLSR result (1)
	Ant 1 WiFi 5.2G	/	2.624	/	/	/	Refer to SPLSR result (2)
	Ant 1 WiFi 5.3G	/	/	2.630	/	/	Refer to SPLSR result (3)
	Ant 1 WiFi 5.6G	/	/	/	2.602	/	Refer to SPLSR result (4)
	Ant 1 WiFi 5.8G	/	/	/	/	2.588	Refer to SPLSR result (5)
	Bluetooth	1.468	1.453	1.377	1.406	1.371	1.468

Note:

(1) MAX.  $\sum \text{SAR}_{1g} < 1.6 \text{ W/Kg}$ , the SAR to peak location separation ratio should not be considered, otherwise, see section 7.3.3 for more information.

(2) The highest simultaneous SAR value=1.468W/Kg, per KDB690783 D01.

### 7.3.3 SIMULTANEOUS TRANSMISSION CONLCUSION

According to KDB447498 D01, When the sum of SAR is larger than limit, SAR test exclusion is determined by the SAR to peak location separation ratio (SPLSR). When the SAR to peak location ratio for each pair of antennas is 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. When 10-g SAR applies, the ratio must be  $\leq 0.10$ .

When SAR is measured for both antennas in the pair the peak location separation distance is computed by the following formula:


$$\text{Distance}_{\text{Tx1-Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i$$

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location should be translated onto the test device to determine the peak location separation for the antenna pair. The ERP location on the phantom is aligned with the ERP location on the handset, with 6mm separation in the z coordinate due to the ear spacer. A measured peak location can be translated onto the handset, with respect to the ERP location, by ignoring the 6 mm offset in the z coordinate. The assumed peak location of the antenna with estimated SAR can also be determined with respect to the ERP location on the handset. The peak location separation distance is estimated by the x and y coordinated of the peaks, referenced to the ERP location. While flat phantoms are not expected to have these issues, the same peak translation approach should be applied to determine peak location separation.

(1) The sum of aggregate 1g SAR was above 1.6 W/kg for Bottom Side configuration with Ant 1 WIFI 2.4G and Ant 2 WIFI 2.4G.


The Peak SAR location is as below:

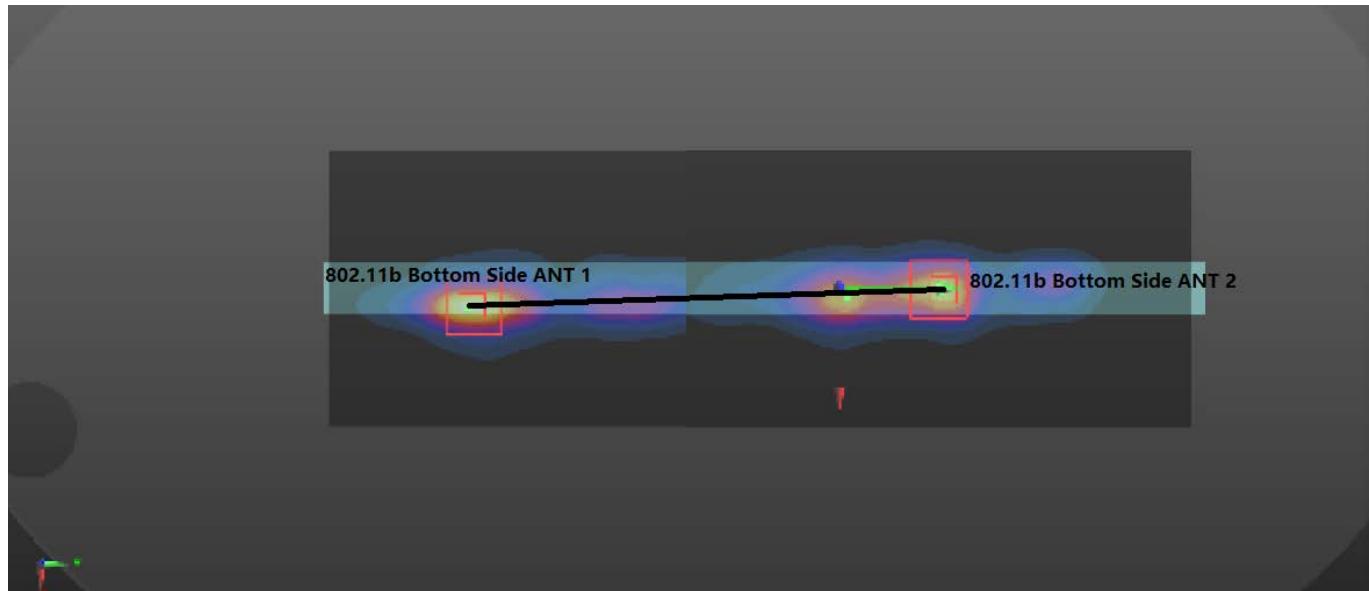

Mode	Reported SAR <sub>1g</sub>	Peak SAR <sub>1g</sub>	X	Y	Z	D(mm)	SPLSR	Ratio Limit	Simultaneous SAR
	mW/g	mW/g	m	m	m				
Ant 1 WiFi 2.4G	1.399	1.45	0.0075	-0.086	-0.179	125.1	0.037	0.04	No
Ant 2 WiFi 2.4G	1.388	1.44	0.0015	0.039	-0.179				

(2) The sum of aggregate 1g SAR was above 1.6 W/kg for Bottom Side configuration with Ant 1 WIFI 5.2G and Ant 2 WIFI 5.2G.


The Peak SAR location is as below:

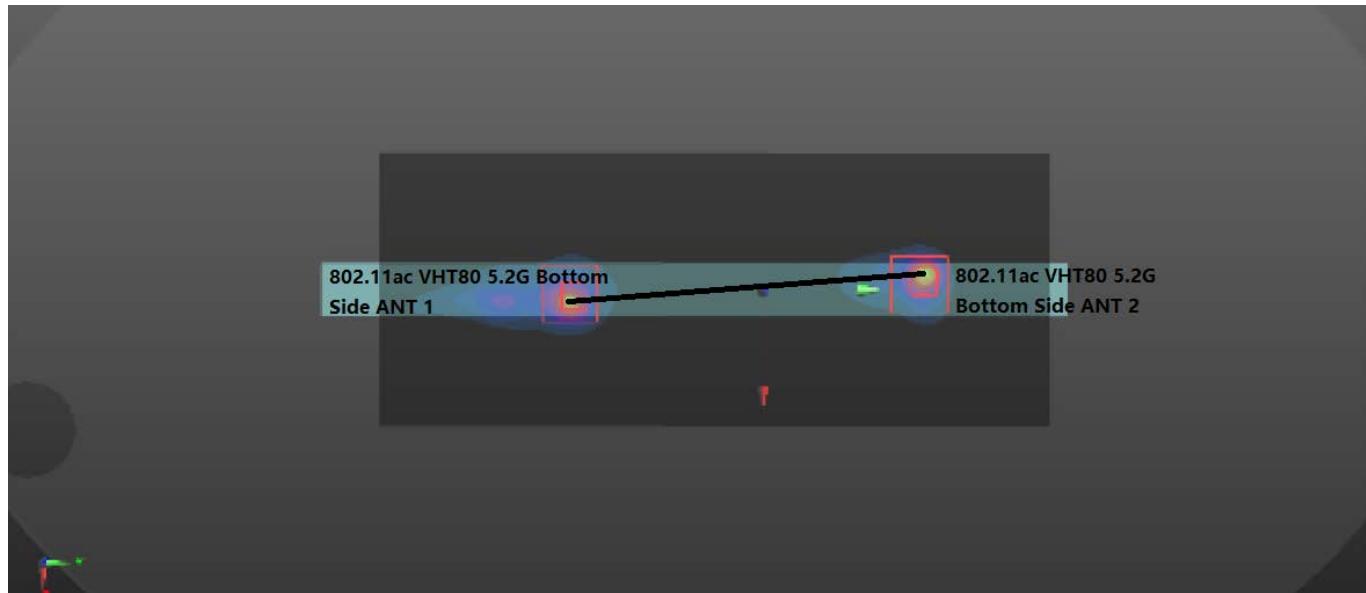

Mode	Reported SAR <sub>1g</sub>	Peak SAR <sub>1g</sub>	X	Y	Z	D(mm)	SPLSR	Ratio Limit	Simultaneous SAR
	mW/g	mW/g	m	m	m				
Ant 1 WiFi 5.2G	1.251	2.35	0.0045	-0.048	-0.181	110.5	0.038	0.04	No
Ant 2 WiFi 5.2G	1.373	2.51	-0.006	0.062	-0.181				

(3) The sum of aggregate 1g SAR was above 1.6 W/kg for Bottom Side configuration with Ant 1 WIFI 5.3G and Ant 2 WIFI 5.3G.


The Peak SAR location is as below:

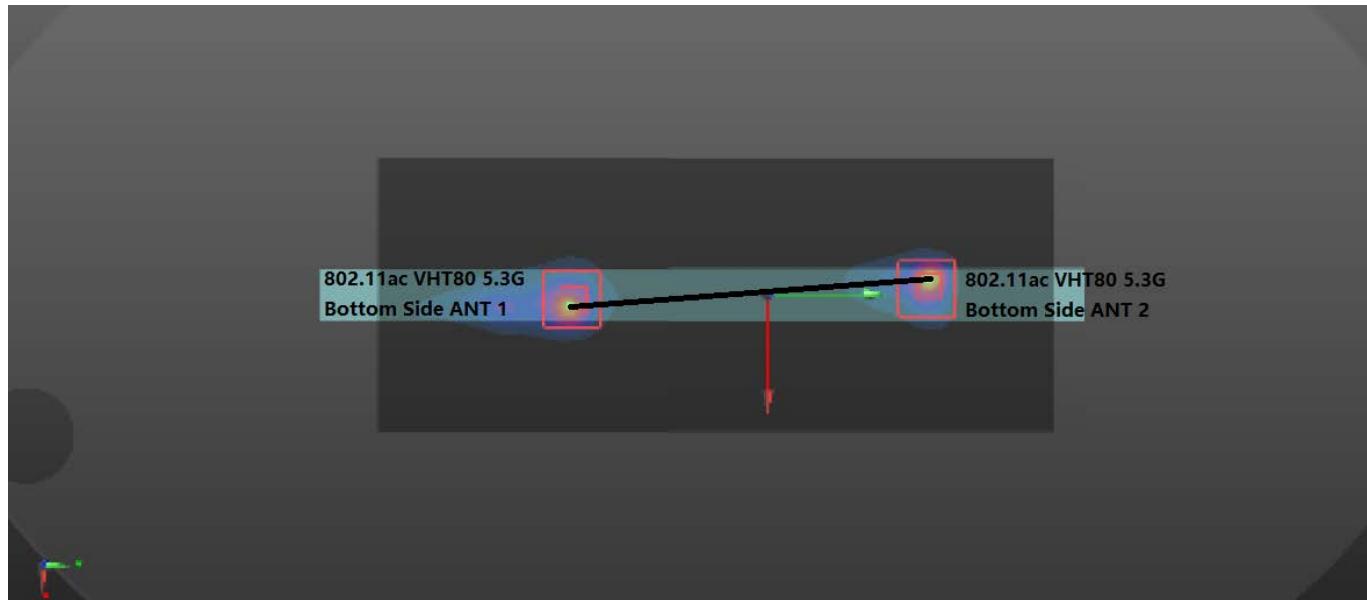

Mode	Reported	Peak	X	Y	Z	D(mm)	SPLSR	Ratio Limit	Simultaneous SAR
	SAR <sub>1g</sub>	mW/g							
Ant 1 WiFi 5.3G	1.333	2.47	0.0045	-0.048	-0.181	110.5	0.039	0.04	No
Ant 2 WiFi 5.3G	1.297	2.71	-0.006	0.062	-0.181				

(4) The sum of aggregate 1g SAR was above 1.6 W/kg for Bottom Side configuration with Ant 1 WIFI 5.6G and Ant 2 WIFI 5.6G.


The Peak SAR location is as below:

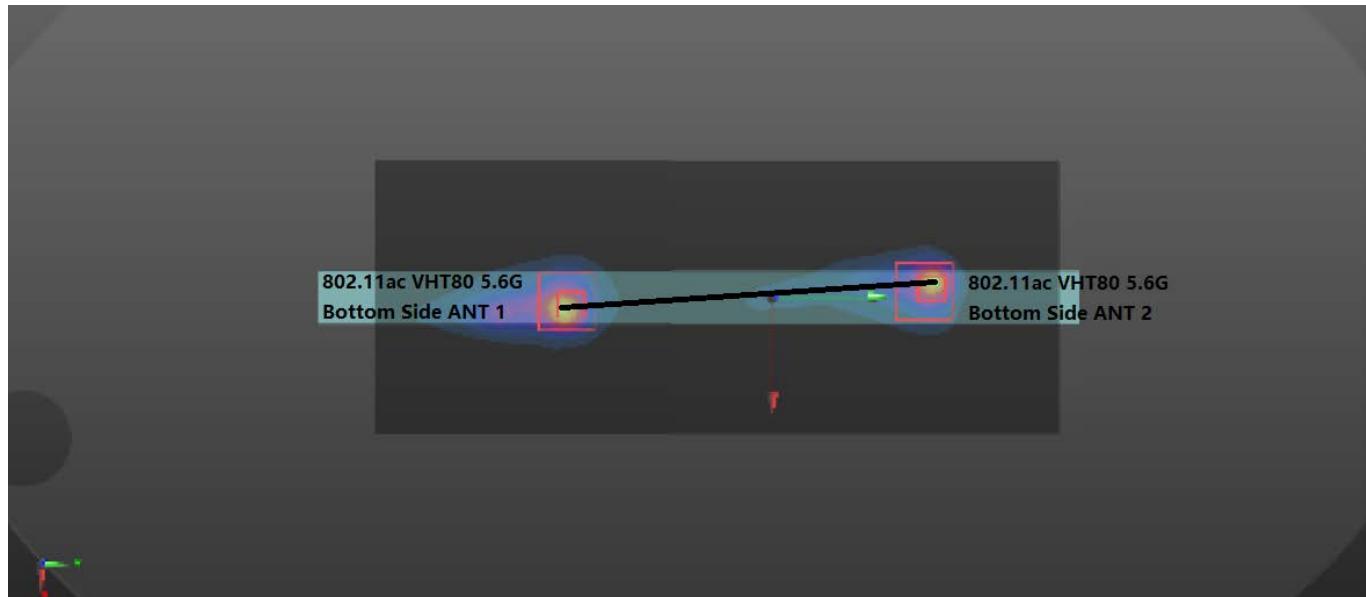

Mode	Reported	Peak	X	Y	Z	D(mm)	SPLSR	Ratio	Simultaneous
	SAR <sub>1g</sub>	SAR <sub>1g</sub>							
Ant 1 WiFi 5.6G	1.276	2.40	0.0045	-0.048	-0.181	110.5	0.038	0.04	No
Ant 2 WiFi 5.6G	1.326	2.57	-0.006	0.062	-0.181				

(5) The sum of aggregate 1g SAR was above 1.6 W/kg for Bottom Side configuration with Ant 1 WIFI 5.8G and Ant 2 WIFI 5.8G.


The Peak SAR location is as below:

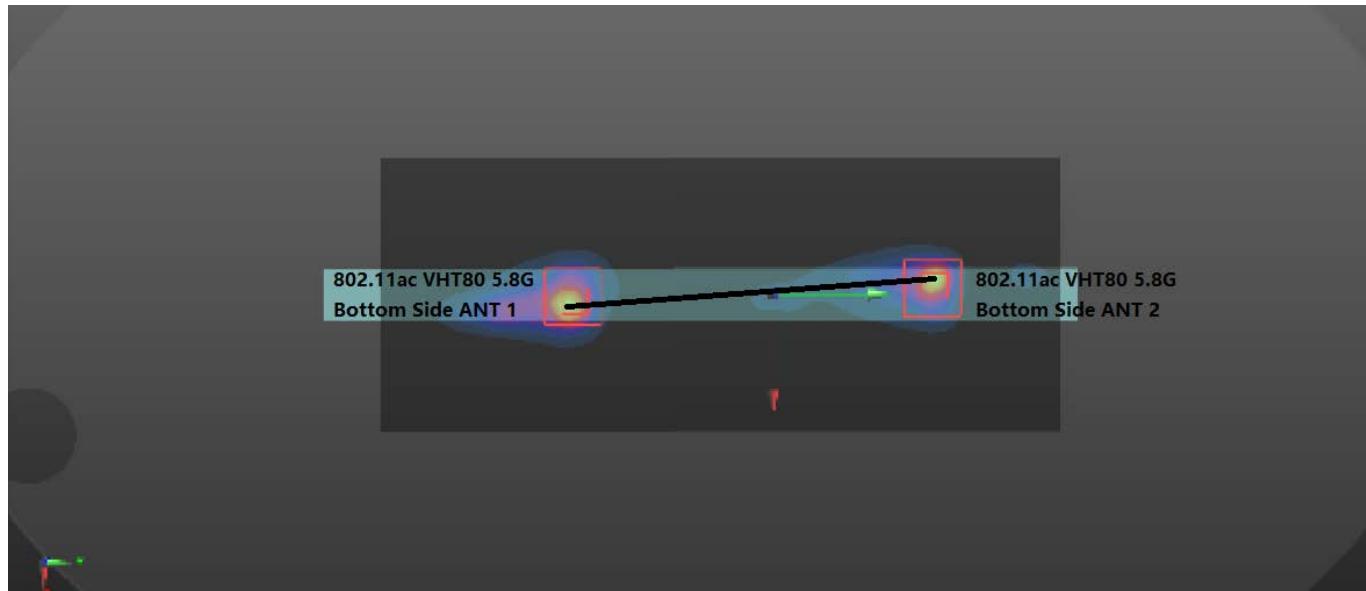

Mode	Reported SAR <sub>1g</sub>	Peak SAR <sub>1g</sub>	X	Y	Z	D(mm)	SPLSR	Ratio Limit	Simultaneous SAR
	mW/g	mW/g	m	m	m				
Ant 1 WiFi 5.8G	1.297	2.43	0.0045	-0.048	-0.181	110.5	0.038	0.04	No
Ant 2 WiFi 5.8G	1.291	2.74	-0.006	0.062	-0.181				

**APPENDIX****1. TEST LAYOUT****Specific Absorption Rate Test Layout****Liquid depth in the flat Phantom ( $\geq 15\text{cm}$  depth)**

MSL\_2300MHz-2700MHz\_16.5cm

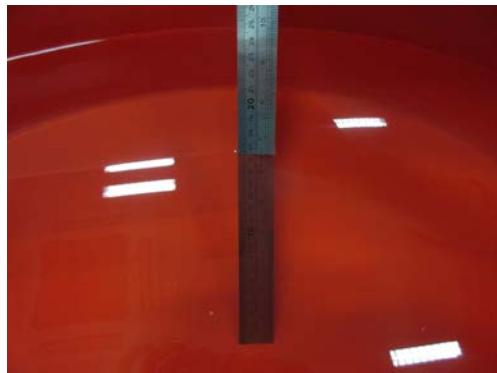

MSL\_5GHz\_15.2cm



## Appendix A. SAR Plots of System Verification

(Pls See 1911C198-1-FCC SAR\_WLAN Module\_abgn for RTL8822CE\_Appendix A.)

## Appendix B. SAR Plots of SAR Measurement

(Pls See 1911C198-1-FCC SAR\_WLAN Module\_abgn for RTL8822CE\_Appendix B.)

## Appendix C. Calibration Certificate

(Pls See 1911C198-1-FCC SAR\_WLAN Module\_abgn for RTL8822CE\_Appendix C.)

## Appendix D. Photographs of the Test Set-Up

(Pls See 1911C198-1-FCC SAR\_WLAN Module\_abgn for RTL8822CE\_Appendix D.)

## Appendix E. Antenna location

(Pls See 1911C198-1-FCC SAR\_WLAN Module\_abgn for RTL8822CE\_Appendix E.)

**End of Test Report**