



FCC SAR TEST REPORT

FCC ID : TX2-RTL8822CE

Equipment : 802.11a/b/g/n/ac RTL8822CE Combo module

Brand Name : Realtek

Model Name : RTL8822CE

Applicant : Realtek Semiconductor Corp.

No.2, Innovation Road II, Hsinchu Science Park,

Hsinchu300, Taiwan

Standard : FCC 47 CFR Part 2 (2.1093)

ANSI/IEEE C95.1-1992

IEEE 1528-2013

Equipment: Realtek RTL8822CE tested inside of Lenovo Notebook Computer

The product was received on Jan. 12, 2020 and testing was started from Feb. 13, 2020 and completed on Feb. 17, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

Cona Guang

TEL: 886-3-327-3456 Page 1 of 38 FAX: 886-3-328-4978 Issued Date : Feb. 24, 2020

Page 2 of 38

Issued Date : Feb. 24, 2020

Table of Contents

1. Statement of Compliance	
2. Guidance Applied	
3. Equipment Under Test (EUT) Information	
3.1 General Information	
4. RF Exposure Limits	
4.1 Uncontrolled Environment	6
4.2 Controlled Environment	6
5. Specific Absorption Rate (SAR)	
5.1 Introduction	7
5.2 SAR Definition	7
6. System Description and Setup	8
6.1 E-Field Probe	9
6.2 Data Acquisition Electronics (DAE)	9
6.3 Phantom	
6.4 Device Holder	
7. Measurement Procedures	
7.1 Spatial Peak SAR Evaluation	12
7.2 Power Reference Measurement	13
7.3 Area Scan	13
7.4 Zoom Scan	14
7.5 Volume Scan Procedures	14
7.6 Power Drift Monitoring	
8. Test Equipment List	
9. System Verification	
9.1 Tissue Simulating Liquids	16
9.2 Tissue Verification	
9.3 System Performance Check Results	18
10. RF Exposure Positions	
10.1 SAR Testing for Tablet	18
11. WiFi/Bluetooth Output Power (Unit: dBm)	
12. Antenna Location	
13. SAR Test Results	33
13.1 Body SAR	
13.2 Repeated SAR Measurement	
14. Simultaneous Transmission Analysis	
14.1 Body Exposure Conditions	
14.2 SPLSR Evaluation and Analysis	
15. Uncertainty Assessment	
16. References	38
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No. : FA010919-02

Report No.	Version	Description	Issued Date
FA010919-02	01	Initial issue of report	Feb. 24, 2020

TEL: 886-3-327-3456 Page 3 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Realtek Semiconductor Corp., 802.11a/b/g/n/ac RTL8822CE Combo module, RTL8822CE, are as follows.

Report No.: FA010919-02

Equipment Class	Frequency Band	Highest SAR Summary Body (Separation 0mm) 1g SAR (W/kg)	Highest Simultaneous Transmission 1g SAR (W/kg)
DTS	2.4GHz WLAN	1.20	1.14
NII	5GHz WLAN	1.02	1.28
DSS	Bluetooth 0.05 1.2		1.28
Date	of Testing:	2020/2/13 -	~ 2020/2/17

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: <u>Jason Wang</u> Report Producer: <u>Wan Liu</u>

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02

TEL: 886-3-327-3456 Page 4 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification			
Equipment Name	02.11a/b/g/n/ac RTL8822CE Combo module		
Brand Name	Realtek		
Model Name	RTL8822CE		
FCC ID	TX2-RTL8822CE		
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2472 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz		
Mode	WLAN: 802.11a/b/g/n/ac HT20 / HT40 / VHT20 / VHT40 / VHT80 Bluetooth BR/EDR/LE/HS		

Report No.: FA010919-02

Remark:

- 1. This device is convertible type notebook PC, and there are two mode as usage way, one is laptop mode, another is tablet mode.
- 2. This device had two antenna vendors, RF exposure evaluation is selected High-tek as the main tested, AWAN will spot check worst case found in High-tek.
- 3. Refer to tune-up procedure the channel 12 and 13 powers are low than others channel, measure power and SAR consideration is not necessary.

Host Information			
Equipment Name Notebook Computer			
Brand Name	Lenovo		
Model Name	IdeaPad Flex 5 15IIL05		
EUT Stage	Production Unit		

Antenna Information													
		Manufact	urer		1AWA	N			Manufact	urer		AWA	٧
		Ant. Type			PIFA				Ant. Typ	ре		PIFA	
	Part Number				025.901N2				Part Num			025.901N1	
Antenn 1	Min Freq.	Max Freq.	Peak Gain (dBi)	Min Freq.	Max Freq.	Peak Gain (dBi)	Antenna 2	Min Freq.	Max Freq.	Peak Gain (dBi)	Min Freq.	Max Freq.	Peak Gain (dBi)
	2400MHz	2483.5MHz	-3.24	5470MHz	5725MHz	-3.1		2400MHz	2483.5MHz	-4.94	5470MHz	5725MHz	-5.95
	5150MHz	5250MHz	-4.06	5725MHz	5850MHz	-3.09		5150MHz	5250MHz	-6.77	5725MHz	5850MHz	-5.9
	5250MHz	5350MHz	-3.95					5250MHz	5350MHz	-5.78			
	Manufacturer High-tek			Manufacturer		High-tek							
	Ant. Type		PIFA				Ant. Typ	oe		PIFA			
	Part Number			025.901N5.0001				Part Num	ber		025.901N6	5.0001	
Antenn 1	Min Freq.	Max Freq.	Peak Gain (dBi)	Min Freq.	Max Freq.	Peak Gain (dBi)	Antenna 2	Min Freq.	Max Freq.	Peak Gain (dBi)	Min Freq.	Max Freq.	Peak Gain (dBi)
	2400MHz	2483.5MHz	2.62	5470MHz	5725MHz	2.99		2400MHz	2483.5MHz	1.61	5470MHz	5725MHz	1.86
	5150MHz	5250MHz	2.16	5725MHz	5850MHz	2.99		5150MHz	5250MHz	2.16	5725MHz	5850MHz	1.57
	5250MHz	5350MHz	2.02					5250MHz	5350MHz	1.72			

TEL: 886-3-327-3456 Page 5 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

4. <u>RF Exposure Limits</u>

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Report No.: FA010919-02

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

TEL: 886-3-327-3456 Page 6 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

Report No.: FA010919-02

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (p). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

TEL: 886-3-327-3456 Page 7 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:



Report No.: FA010919-02

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

TEL: 886-3-327-3456 Page 8 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges	
	PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	



Report No.: FA010919-02

<EX3DV4 Probe>

Construction	Symmetric design with triangular core
	Built-in shielding against static charges
	PEEK enclosure material (resistant to organic
	solvents, e.g., DGBE)
Frequency	10 MHz – >6 GHz
	Linearity: ±0.2 dB (30 MHz – 6 GHz)
Directivity	±0.3 dB in TSL (rotation around probe axis)
	±0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g – >100 mW/g
	Linearity: ±0.2 dB (noise: typically <1 µW/g)
Dimensions	Overall length: 337 mm (tip: 20 mm)
	Tip diameter: 2.5 mm (body: 12 mm)
	Typical distance from probe tip to dipole centers: 1
	mm



6.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

TEL: 886-3-327-3456 Page 9 of 38 FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

6.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	7 5
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

Report No.: FA010919-02

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

\LLIT Hantom>		
Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

TEL: 886-3-327-3456 Page 10 of 38 FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

6.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.





Report No.: FA010919-02

Mounting Device for Hand-Held Transmitters

Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

TEL: 886-3-327-3456 Page 11 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Report No.: FA010919-02

- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

TEL: 886-3-327-3456 Page 12 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Report No.: FA010919-02

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz		
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$		
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°		
	\leq 2 GHz: \leq 15 mm 2 – 3 GHz: \leq 12 mm	$3 - 4 \text{ GHz:} \le 12 \text{ mm}$ $4 - 6 \text{ GHz:} \le 10 \text{ mm}$		
Maximum area scan spatial resolution: $\Delta x_{\text{Area}},\Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.			

TEL: 886-3-327-3456 Page 13 of 38 FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Report No.: FA010919-02

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan s	patial reso	lution: Δx _{Zoom} , Δy _{Zoom}	\leq 2 GHz: \leq 8 mm 2 – 3 GHz: \leq 5 mm [*]	$3 - 4 \text{ GHz: } \le 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \le 4 \text{ mm}^*$
	uniform	grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4 \text{ GHz: } \le 4 \text{ mm}$ $4 - 5 \text{ GHz: } \le 3 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	graded	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	grid $\Delta z_{Zoom}(n>1)$: between subsequent points		≤ 1.5·∆z	Zoom(n-1)
Minimum zoom scan volume	X V 7		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

TEL: 886-3-327-3456 Page 14 of 38 FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

8. Test Equipment List

Manufacturan	Name of Environment	True o /80 o al ol	Carial Number	Calib	ration
Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 31, 2018	Aug. 29, 2020
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2018	Sep. 25, 2020
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 17, 2019	Sep. 16, 2020
SPEAG	Data Acquisition Electronics	DAE4	778	May. 21, 2019	May. 20, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 25, 2019	Sep. 24, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 22, 2019	Jul. 21, 2020
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2019	Nov. 11, 2020
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2019	Nov. 11, 2020
R&S	BT Base Station	CBT32	100522	Mar. 18, 2019	Mar. 17, 2020
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 06, 2019	Sep. 05, 2020
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 18, 2019	Sep. 17, 2020
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 10, 2019	Sep. 09, 2020
Anritsu	Power Meter	ML2495A	1036004	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Sensor	MA2411B	1027253	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Meter	ML2495A	1419002	May. 29, 2019	May. 28, 2020
Anritsu	Power Sensor	MA2411B	1339124	May. 29, 2019	May. 28, 2020
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2019	Aug. 26, 2020
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 27, 2019	Jun. 26, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2019	Oct. 15, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 12, 2019	Aug. 11, 2020
ATM	Dual Directional Coupler	C122H-10	P610410z-02	No	te 1
Woken	Attenuator 1	WK0602-XX	N/A	No	te 1
PE	Attenuator 2	PE7005-10	N/A	No	te 1
PE	Attenuator 3	PE7005- 3	N/A	No	te 1

Report No.: FA010919-02

General Note:

- 1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- 2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- 3. The justification data of dipole D5GHzV2, SN: 1006, D2450V2, SN: 736 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

TEL: 886-3-327-3456 Page 15 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.







Report No.: FA010919-02

Fig 10.2 Photo of Liquid Height for Body SAR

TEL: 886-3-327-3456 Page 16 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Report No.: FA010919-02

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)							
Water	64~78%							
Mineral oil	11~18%							
Emulsifiers	9~15%							
Additives and Salt	2~3%							

<Tissue Dielectric Parameter Check Results>


Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
2450	22.7	1.859	39.037	1.80	39.20	3.28	-0.42	±5	2020/2/13
2450	22.7	1.782	38.615	1.80	39.20	-1.00	-1.49	±5	2020/2/17
5250	22.4	4.783	37.100	4.71	35.95	1.55	3.20	±5	2020/2/14
5600	22.4	5.135	36.638	5.07	35.50	1.28	3.21	±5	2020/2/14
5750	22.4	5.284	36.424	5.22	35.35	1.23	3.04	±5	2020/2/14

TEL: 886-3-327-3456 Page 17 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/2/13	2450	250	D2450V2-736	ES3DV3 - SN3270	DAE4 Sn778	14.40	52.70	57.6	9.30
2020/2/17	2450	250	D2450V2-736	EX3DV4 - SN7306	DAE3 Sn577	13.80	52.70	55.2	4.74
2020/2/14	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE3 Sn577	7.70	80.70	77	-4.58
2020/2/14	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE3 Sn577	8.67	83.30	86.7	4.08
2020/2/14	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN7306	DAE3 Sn577	7.77	80.40	77.7	-3.36

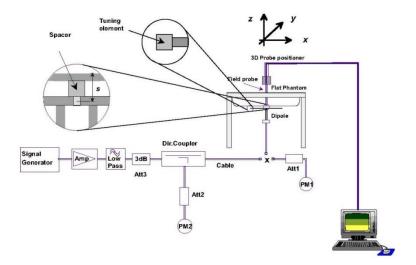



Report No.: FA010919-02

Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

TEL: 886-3-327-3456 Page 18 of 38 FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

11. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF
exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas
operating in SISO mode.

Report No.: FA010919-02

- 2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6W/kg and SAR peak to location ratio ≤ 0.04, no additional SAR measurements for MIMO
- 3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
- 4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
- 5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
- 6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

TEL: 886-3-327-3456 Page 19 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

<2.4GHz WLAN ANT 1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		1	2412	15.30	15.50	
		6	2437	15.00	15.50	
	802.11b 1Mbps	11	2462	15.40	15.50	100.00
		12	2467	15.30	15.50	
		13	2472	15.40	15.50	
		1	2412	15.30	15.50	
		6	2437	15.30	15.50	
	802.11g 6Mbps	11	2462	15.20	15.50	100.00
		12	2467	15.30	15.50	
		13	2472	15.30	15.50	
		1	2412	15.30	15.50	
		6	2437	15.20	15.50	100.00
	802.11n-HT20 MCS0	11	2462	15.30	15.50	
2.4GHz WLAN		12	2467	15.20	15.50	
		13	2472	15.20	15.50	
		3	2422	15.30	15.50	100.00
		6	2437	15.30	15.50	
	802.11n-HT40 MCS0	9	2452	15.20	15.50	
		10	2457	15.30	15.50	
		11	2462	15.40	15.50	
		1	2412	15.40	15.50	
		6	2437	15.30	15.50	
	802.11ac-VHT20 MCS0	11	2462	15.40	15.50	100.00
	IVICSU	12	2467	15.30	15.50	
		13	2472	15.30	15.50	
		3	2422	15.40	15.50	
		6	2437	15.40	15.50	100.00
	802.11ac-VHT40	9	2452	15.30	15.50	
	MCS0	10	2457	15.40	15.50	
		11	2462	15.50	15.50	

Report No. : FA010919-02

TEL: 886-3-327-3456 Page 20 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

<2.4GHz WLAN ANT 2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		1	2412	15.40	15.50	
		6	2437	15.10	15.50	
	802.11b 1Mbps	11	2462	15.20	15.50	100.00
		12	2467	15.20	15.50	
		13	2472	15.40	15.50	
		1	2412	15.30	15.50	
		6	2437	15.30	15.50	
	802.11g 6Mbps	11	2462	15.20	15.50	100.00
		12	2467	15.20	15.50	
		13	2472	15.20	15.50	
		1	2412	15.20	15.50	
		6	2437	15.30	15.50	
	802.11n-HT20 MCS0	11	2462	15.30	15.50	100.00
2.4GHz WLAN		12	2467	15.20	15.50	
		13	2472	15.30	15.50	
		3	2422	15.20	15.50	100.00
		6	2437	15.30	15.50	
	802.11n-HT40 MCS0	9	2452	15.30	15.50	
		10	2457	15.20	15.50	
		11	2462	15.30	15.50	
		1	2412	15.30	15.50	
		6	2437	15.40	15.50	
	802.11ac-VHT20 MCS0	11	2462	15.40	15.50	100.00
	IVICOU	12	2467	15.30	15.50	
		13	2472	15.40	15.50	
		3	2422	15.30	15.50	
		6	2437	15.40	15.50	
	802.11ac-VHT40 MCS0	9	2452	15.40	15.50	100.00
	IVICOU	10	2457	15.30	15.50	
		11	2462	15.40	15.50	

Report No. : FA010919-02

TEL: 886-3-327-3456 Page 21 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

<2.4GHz WLAN ANT 1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		1	2412	16.86	17.00	
		6	2437	16.51	17.00	
	802.11b 1Mbps	11	2462	16.66	17.00	100.00
		12	2467	16.66	17.00	
		13	2472	16.76	17.00	
		1	2412	16.71	17.00	
		6	2437	16.71	17.00	
	802.11g 6Mbps	11	2462	16.66	17.00	100.00
		12	2467	16.61	17.00	
		13	2472	16.66	17.00	
		1	2412	16.61	17.00	
		6	2437	16.56	17.00	100.00
	802.11n-HT20 MCS0	11	2462	16.56	17.00	
2.4GHz WLAN		12	2467	16.61	17.00	
		13	2472	16.61	17.00	
		3	2422	16.71	17.00	100.00
		6	2437	16.66	17.00	
	802.11n-HT40 MCS0	9	2452	16.61	17.00	
		10	2457	16.66	17.00	
		11	2462	16.66	17.00	
		1	2412	16.71	17.00	
		6	2437	16.66	17.00	
	802.11ac-VHT20 MCS0	11	2462	16.66	17.00	100.00
	IVICSU	12	2467	16.71	17.00	
-		13	2472	16.71	17.00	
		3	2422	16.81	17.00	
		6	2437	16.76	17.00	100.00
	802.11ac-VHT40	9	2452	16.71	17.00	
	MCS0	10	2457	16.76	17.00	
		11	2462	16.76	17.00	

Report No. : FA010919-02

TEL: 886-3-327-3456 Page 22 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

<5GHz WLAN ANT1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		36	5180	12.20	12.50	
	000 44 - 014	40	5200	12.30	12.50	400.00
	802.11a 6Mbps	44	5220	12.10	12.50	100.00
		48	5240	12.10	12.50	
		36	5180	11.70	12.00	
	802.11n-HT20 MCS0 -	40	5200	11.70	12.00	100.00
		44	5220	11.70	12.00	
5.2GHz WLAN		48	5240	11.80	12.00	
	000 44 - UT40 MOCO	38	5190	11.80	12.00	100.00
	802.11n-HT40 MCS0	46	5230	11.80	12.00	
		36	5180	11.80	12.00	
	802.11ac-VHT20	40	5200	11.80	12.00	400.00
	MCS0	44	5220	11.80	12.00	100.00
		48	5240	11.90	12.00	
	802.11ac-VHT40	38	5190	11.90	12.00	100.00
	MCS0	46	5230	11.90	12.00	100.00
	802.11ac-VHT80 MCS0	42	5210	11.80	12.00	100.00

Report No. : FA010919-02

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		52	5260	12.50	12.50	
	902 11a 6Mbpa	56	5280	12.40	12.50	100.00
	802.11a 6Mbps	60	5300	12.40	12.50	100.00
		64	5320	12.40	12.50	
		52	5260	11.70	12.00	
	802.11n-HT20 MCS0	56	5280	11.70	12.00	100.00
	802.1111-H120 MCS0	60	5300	11.70	12.00	
5.3GHz WLAN		64	5320	11.60	12.00	
	802.11n-HT40 MCS0	54	5270	11.60	12.00	100.00
		62	5310	11.70	12.00	
		52	5260	11.80	12.00	
	802.11ac-VHT20	56	5280	11.80	12.00	100.00
	MCS0	60	5300	11.80	12.00	100.00
		64	5320	11.70	12.00	
	802.11ac-VHT40	54	5270	11.70	12.00	100.00
	MCS0	62	5310	11.80	12.00	100.00
	802.11ac-VHT80 MCS0	58	5290	11.80	12.00	100.00

TEL: 886-3-327-3456 Page 23 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		100	5500	12.70	13.00	
		116	5580	12.60	13.00	
	000 44 - 014	124	5620	12.80	13.00	100.00
	802.11a 6Mbps	132	5660	12.70	13.00	100.00
		140	5700	12.90	13.00	
		144	5720	12.70	13.00	
		100	5500	12.20	12.50	
		116	5580	12.20	12.50	
	000 44 11700 14000	124	5620	12.30	12.50	400.00
	802.11n-HT20 MCS0 -	132	5660	12.30	12.50	100.00
		140	5700	12.20	12.50	
		144	5720	12.20	12.50	
		102	5510	12.30	12.50	
	802.11n-HT40 MCS0	110	5550	12.30	12.50	100.00
5.5GHz WLAN		126	5630	12.30	12.50	
		134	5670	12.20	12.50	
		142	5710	12.30	12.50	
		100	5500	12.30	12.50	
		116	5580	12.30	12.50	
	802.11ac-VHT20	124	5620	12.40	12.50	
	MCS0	132	5660	12.40	12.50	100.00
		140	5700	12.30	12.50	
		144	5720	12.30	12.50	
		102	5510	12.40	12.50	
		110	5550	12.40	12.50	
	802.11ac-VHT40 MCS0	126	5630	12.40	12.50	100.00
	IVICSU	134	5670	12.30	12.50	
		142	5710	12.40	12.50	
		106	5530	12.40	12.50	
	802.11ac-VHT80	122	5610	12.40	12.50	100.00
	MCS0	138	5690	12.30	12 50	

Report No. : FA010919-02

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		149	5745	11.30	11.50	
	802.11a 6Mbps	157	5785	11.50	11.50	100.00
		165	5825	11.40	11.50	
		149	5745	10.70	11.00	
	802.11n-HT20 MCS0	157	5785	10.70	11.00	100.00
5.8GHz WLAN		165	5825	10.80	11.00	
	802.11n-HT40 MCS0 -	151	5755	10.70	11.00	400.00
		159	5795	10.80	11.00	100.00
		149	5745	10.80	11.00	
	802.11ac-VHT20 MCS0	157	5785	10.80	11.00	100.00
	WOOO	165	5825	10.90	11.00	
	802.11ac-VHT40	151	5755	10.80	11.00	400.00
	MCS0	159	5795	10.90	11.00	100.00
	802.11ac-VHT80 MCS0	155	5775	10.80	11.00	100.00

5690

12.30

12.50

138

TEL: 886-3-327-3456 Page 24 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		36	5180	12.40	12.50	
	000 44a 6Mhna	40	5200	12.40	12.50	100.00
	802.11a 6Mbps	44	5220	12.40	12.50	100.00
		48	5240	12.30	12.50	
		36	5180	11.70	12.00	
	802.11n-HT20 MCS0	40	5200	11.70	12.00	100.00
		44	5220	11.70	12.00	
5.2GHz WLAN		48	5240	11.60	12.00	
	802.11n-HT40 MCS0	38	5190	11.70	12.00	100.00
		46	5230	11.70	12.00	100.00
		36	5180	11.80	12.00	
	802.11ac-VHT20	40	5200	11.80	12.00	400.00
	MCS0	44	5220	11.80	12.00	100.00
		48	5240	11.70	12.00	
	802.11ac-VHT40	38	5190	11.80	12.00	400.00
	MCS0	46	5230	11.80	12.00	100.00
	802.11ac-VHT80 MCS0	42	5210	11.80	12.00	100.00

Report No. : FA010919-02

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		52	5260	12.40	12.50	
	000 11a CMbna	56	5280	12.40	12.50	400.00
	802.11a 6Mbps	60	5300	12.40	12.50	100.00
		64	5320	12.30	12.50	
		52	5260	11.60	12.00	
	802.11n-HT20 MCS0	56	5280	11.60	12.00	100.00
		60	5300	11.60	12.00	
5.3GHz WLAN		64	5320	11.80	12.00	
	000 44 11740 14000	54	5270	11.70	12.00	100.00
	802.11n-HT40 MCS0	62	5310	11.70	12.00	100.00
		52	5260	11.70	12.00	
	802.11ac-VHT20	56	5280	11.70	12.00	400.00
	MCS0	60	5300	11.70	12.00	100.00
		64	5320	11.90	12.00	
	802.11ac-VHT40	54	5270	11.80	12.00	400.00
	MCS0	62	5310	11.80	12.00	100.00
	802.11ac-VHT80 MCS0	58	5290	11.70	12.00	100.00

TEL: 886-3-327-3456 Page 25 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

Frequency (MHz) Average power (dBm) Tune-Up Limit Mode Duty Cycle % Channel 100 12.70 13.00 116 5580 12.80 13.00 12.80 124 5620 13.00 802.11a 6Mbps 100.00 132 5660 12.80 13.00 140 5700 12.70 13.00 144 5720 12.80 13.00 100 5500 12.30 12.50 5580 12.50 116 12.30 124 5620 12.30 12.50 802.11n-HT20 MCS0 100.00 132 5660 12.30 12.50 140 5700 12.20 12.50 12.20 12.50 144 5720 102 5510 12.30 12.50 110 5550 12.20 12.50 5.5GHz WLAN 802.11n-HT40 MCS0 126 5630 12.30 12.50 100.00 134 5670 12.30 12.50 12.50 142 5710 12.30 100 5500 12.40 12.50 116 5580 12.40 12.50 124 5620 12.40 12.50 802.11ac-VHT20 100.00 MCS0 132 5660 12.40 12.50 140 5700 12.30 12.50 144 5720 12.30 12.50 12.40 12.50 102 5510 110 5550 12.30 12.50 802.11ac-VHT40 126 5630 12.30 12.50 100.00 MCS0 134 5670 12.40 12.50 142 5710 12.40 12.50 106 5530 12.40 12.50 802.11ac-VHT80 122 5610 12.40 12.50 100.00 MCS0

Report No.: FA010919-02

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		149	5745	11.20	11.50	
	802.11a 6Mbps	157	5785	11.40	11.50	100.00
		165	5825	11.40	11.50	
		149	5745	10.70	11.00	
	802.11n-HT20 MCS0	157	5785	10.80	11.00	100.00
5.8GHz WLAN		165	5825	10.70	11.00	
	002 44 n LIT40 MCCO	151	5755	10.70	11.00	100.00
	802.11n-HT40 MCS0	159	5795	10.70	11.00	100.00
		149	5745	10.80	11.00	
	802.11ac-VHT20 MCS0	157	5785	10.90	11.00	100.00
	I WOOD	165	5825	10.80	11.00	
	802.11ac-VHT40	151	5755	10.80	11.00	100.00
	MCS0	159	5795	10.80	11.00	100.00
	802.11ac-VHT80 MCS0	155	5775	10.90	11.00	100.00

5690

12.30

12.50

138

TEL: 886-3-327-3456 Page 26 of 38 FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		36	5180	15.26	15.50	
	900 44a 6Mhna	40	5200	15.36	15.50	100.00
	802.11a 6Mbps	44	5220	15.36	15.50	100.00
		48	5240	15.31	15.50	
		36	5180	14.71	15.00	
	802.11n-HT20 MCS0	40	5200	14.71	15.00	100.00
		44	5220	14.81	15.00	
5.2GHz WLAN		48	5240	14.76	15.00	
	802.11n-HT40 MCS0	38	5190	14.71	15.00	400.00
		46	5230	14.71	15.00	100.00
		36	5180	14.81	15.00	
	802.11ac-VHT20	40	5200	14.81	15.00	
	MCS0	44	5220	14.91	15.00	100.00
		48	5240	14.86	15.00	
	802.11ac-VHT40	38	5190	14.81	15.00	
	MCS0	46	5230	14.81	15.00	100.00
	802.11ac-VHT80 MCS0	42	5210	14.76	15.00	100.00

Report No. : FA010919-02

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		52	5260	15.41	15.50	
	000 44a 6Mhna	56	5280	15.31	15.50	100.00
	802.11a 6Mbps	60	5300	15.41	15.50	100.00
		64	5320	15.46	15.50	
		52	5260	14.71	15.00	
	802.11n-HT20 MCS0	56	5280	14.71	15.00	100.00
	802.1111-H120 MCS0	60	5300	14.71	15.00	
5.3GHz WLAN		64	5320	14.71	15.00	
	802.11n-HT40 MCS0	54	5270	14.76	15.00	100.00
		62	5310	14.76	15.00	100.00
		52	5260	14.81	15.00	
	802.11ac-VHT20	56	5280	14.81	15.00	400.00
	MCS0	60	5300	14.81	15.00	100.00
		64	5320	14.81	15.00	
	802.11ac-VHT40	54	5270	14.86	15.00	400.00
	MCS0	62	5310	14.86	15.00	100.00
	802.11ac-VHT80 MCS0	58	5290	14.71	15.00	100.00

TEL: 886-3-327-3456 Page 27 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		100	5500	15.76	16.00	
		116	5580	15.81	16.00	
	000 44 - 0Mb	124	5620	15.91	16.00	400.00
	802.11a 6Mbps	132	5660	15.86	16.00	100.00
		140	5700	15.81	16.00	
		144	5720	15.76	16.00	
		100	5500	15.26	15.50	
		116	5580	15.31	15.50	
	000 44 11700 14000	124	5620	15.31	15.50	100.00
	802.11n-HT20 MCS0 -	132	5660	15.21	15.50	100.00
		140	5700	15.21	15.50	
		144	5720	15.26	15.50	
		102	5510	15.26	15.50	
		110	5550	15.21	15.50	
.5GHz WLAN	802.11n-HT40 MCS0	126	5630	15.21	15.50	100.00
		134	5670	15.21	15.50	
		142	5710	15.26	15.50	
		100	5500	15.36	15.50	
		116	5580	15.41	15.50	
	802.11ac-VHT20	124	5620	15.41	15.50	T
	MCS0	132	5660	15.31	15.50	100.00
		140	5700	15.31	15.50	
		144	5720	15.36	15.50	
		102	5510	15.36	15.50	
		110	5550	15.31	15.50	
	802.11ac-VHT40 MCS0	126	5630	15.31	15.50	100.00
	IVICSU	134	5670	15.31	15.50	
		142	5710	15.36	15.50	
		106	5530	15.41	15.50	
	802.11ac-VHT80	122	5610	15.36	15.50	100.00
	MCS0	120	5690	15./1	15.50	

Report No. : FA010919-02

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
		149	5745	14.31	14.50	
	802.11a 6Mbps	157	5785	14.41	14.50	100.00
		165	5825	14.46	14.50	
	802.11n-HT20 MCS0	149	5745	13.66	14.00	
		157	5785	13.71	14.00	100.00
5.8GHz WLAN		165	5825	13.66	14.00	
	802.11n-HT40 MCS0	151	5755	13.76	14.00	100.00
		159	5795	13.76	14.00	100.00
		149	5745	13.76	14.00	
	802.11ac-VHT20 MCS0	157	5785	13.81	14.00	100.00
		165	5825	13.76	14.00	
	802.11ac-VHT40	151	5755	13.86	14.00	100.00
	MCS0	159	5795	13.86	14.00	
	802.11ac-VHT80 MCS0	155	5775	13.81	14.00	100.00

5690

15.41

15.50

138

TEL: 886-3-327-3456 Page 28 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

FCC SAR TEST REPORT

<2.4GHz Bluetooth>


Mode	Channel	Frequency	Average power (dBm)			
Mode	Chamer	(MHz)	1Mbps	2Mbps	3Mbps	
	CH 00	2402	6.24	6.33	6.35	
BR / EDR	CH 39	2441	5.64	5.78	5.80	
	CH 78	2480	6.06	6.08	6.11	
	Tune-up Limit			7	7	

Report No.: FA010919-02

Mode	Channel	Frequency	Average power (dBm)		
	Chame	(MHz)	1Mbps	2Mbps	
	CH 00	2402	11.60	11.70	
LE	CH 19	2440	11.70	11.80	
	CH 39	2480	11.80	11.80	
Tune-up Limit			12	12	

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected BLE1Mbps due to its highest average power and duty cycle is 63.8% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

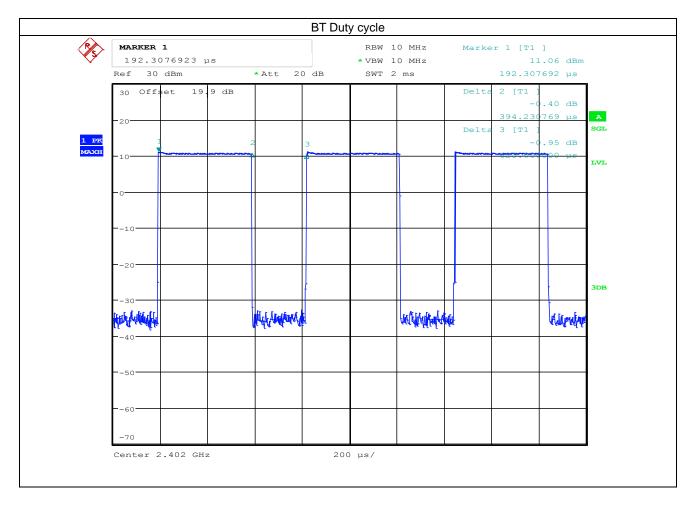


TEL: 886-3-327-3456 Page 29 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

12. Antenna Location

<For Tablet Mode>

Edge1

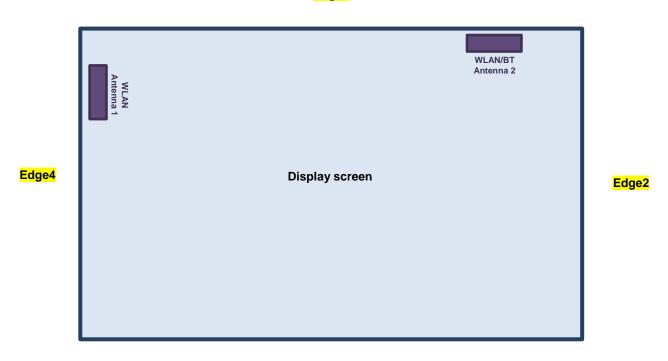

Edge3 Front View


Report No.: FA010919-02

The separation distance for antenna to edge :

Antenna	To Edge1 (mm)	To Edge2 (mm)	To Edge3 (mm)	To Edge4 (mm)
WLAN Antenna 1	25.9	337.6	169.9	10
WLAN/BT Antenna 2	12.6	24	213.2	293.6

TEL: 886-3-327-3456 Page 30 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

<For Laptop Mode>

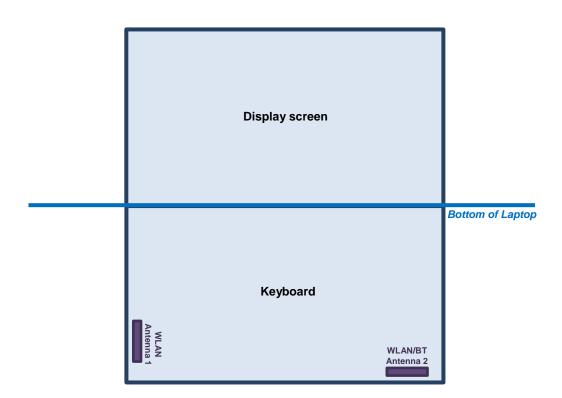

Report No.: FA010919-02

The separation distance for antenna to edge:

Antenna	To Bottom of Laptop (mm)
WLAN Antenna 1	5.97
WLAN/BT Antenna 2	6.49

TEL: 886-3-327-3456 Page 31 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"

Report No.: FA010919-02

- 2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- 3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- 4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- 5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

- f(GHz) is the RF channel transmit frequency in GHz
- · Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance 50 mm)·(f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance 50 mm) 10] mW at > 1500 MHz and ≤ 6 GHz

	Wireless Interface	ВТ	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2	5GHz WLAN ANT 1	5GHz WLAN ANT 2
Exposure Position	Calculated Frequency	2480MHz	2462MHz	2462MHz	5825MHz	5825MHz
	Maximum power (dBm)	12	15.5	15.5	11.5	11.5
	Maximum rated power(mW)	16.0	35.0	35.0	14.0	14.0
	Separation distance(mm)	5.3	6.0	5.3	6.0	5.3
Bottom Face	exclusion threshold	4.8	9.2	10.4	5.6	6.4
	Testing required?	Yes	Yes	Yes	Yes	Yes
	Separation distance(mm)	12.6	25.9	12.6	25.9	12.6
Edge 1	exclusion threshold	2.0	2.1	4.4	1.3	2.7
	Testing required?	No	No	Yes	No	No
	Separation distance(mm)	24.0	337.6	24.0	337.6	24.0
Edge 2	exclusion threshold	1.1	2971.0	2.3	2938.0	1.4
	Testing required?	No	No	No	No	No
	Separation distance(mm)	213.2	169.9	213.2	169.9	213.2
Edge 3	exclusion threshold	1727.0	1295.0	1728.0	1262.0	1694.0
	Testing required?	No	No	No	No	No
	Separation distance(mm)	293.6	10.0	293.6	10.0	293.6
Edge 4	exclusion threshold	2531.0	5.5	2531.0	3.4	2498.0
	Testing required?	No	Yes	No	Yes	No
	Separation distance(mm)	6.5	6.0	6.5	6.0	6.5
Bottom of Laptop	exclusion threshold	3.9	9.2	8.5	5.7	5.2
	Testing required?	Yes	Yes	Yes	Yes	Yes

TEL: 886-3-327-3456 Page 32 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

13. SAR Test Results

General Note:

- 1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Report No.: FA010919-02

- b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
- c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- 2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.

WLAN Note:

- 1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- 2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
- 3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
- 4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
- 6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6W/kg and SAR peak to location ratio ≤ 0.04, no additional SAR measurements for MIMO.</p>
- 7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

TEL: 886-3-327-3456 Page 33 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020



SPORTON LAB. FCC SAR TEST REPORT

13.1 Body SAR

<WLAN SAR>

DI-4			T4	0.00			Fara a	A 6	Average	Tune-Up	Tune-up	Duty	Duty	Power	Measured	Reported
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Antenna Vendor	Power (dBm)	Limit (dBm)	Scaling Factor	Cycle %	Cycle Scaling	Drift (dB)	1g SAR (W/kg)	1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	11	2462	HTK	15.40	15.50	1.023	100	Factor 1.000	-0.08	0.898	0.919
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	1	2412	HTK	15.30	15.50	1.047	100	1.000	0.08	1.070	1.120
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	6	2437	HTK	15.00	15.50	1.122	100	1.000	0.07	0.975	1.094
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	12	2467	HTK	15.30	15.50	1.047	100	1.000	0.03	0.880	0.921
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	13	2472	HTK	15.40	15.50	1.023	100	1.000	0.01	0.862	0.882
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 1	11	2462	HTK	15.40	15.50	1.023	100	1.000	-0.15	0.887	0.908
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 1	1	2412	HTK	15.30	15.50	1.047	100	1.000	0.03	0.955	1.000
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 1	6	2437	HTK	15.00	15.50	1.122	100	1.000	0.02	0.821	0.921
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 1	12	2467	HTK	15.30	15.50	1.047	100	1.000	0.01	0.798	0.836
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 1	13	2472	HTK	15.40	15.50	1.023	100	1.000	0.05	0.824	0.843
	WLAN2.4GHz	802.11b 1Mbps	Edge 4	0mm	Ant 1	11	2462	HTK	15.40	15.50	1.023	100	1.000	-0.07	0.061	0.062
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 1	1	2412	AWAN	15.30	15.50	1.047	100	1.000	0.06	0.522	0.547
01	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	1	2412	HTK	15.40	15.50	1.023	100	1.000	0.02	1.170	1.197
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	6	2437	HTK	15.10	15.50	1.096	100	1.000	0.03	1.054	1.155
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	11	2462	HTK	15.20	15.50	1.072	100	1.000	0.06	1.066	1.142
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	12	2467	HTK	15.20	15.50	1.072	100	1.000	-0.11	1.064	1.140
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	13	2472	HTK	15.40	15.50	1.023	100	1.000	0.02	0.988	1.011
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	1	2412	HTK	15.40	15.50	1.023	100	1.000	-0.15	1.036	1.060
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	6	2437	HTK	15.10	15.50	1.096	100	1.000	0.04	1.022	1.121
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	11	2462	HTK	15.20	15.50	1.072	100	1.000	0.04	1.059	1.135
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	12	2467	HTK	15.20	15.50	1.072	100	1.000	-0.02	1.070	1.147
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	13	2472	HTK	15.40	15.50	1.023	100	1.000	-0.18	1.060	1.085
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 2	1	2412	HTK	15.40	15.50	1.023	100	1.000	-0.01	0.097	0.100
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	1	2412	AWAN	15.40	15.50	1.023	100	1.000	0.02	0.675	0.691
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Ant 1	52	5260	HTK	12.50	12.50	1.000	100	1.000	0.02	0.260	0.260
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 1	52	5260	HTK	12.50	12.50	1.000	100	1.000	-0.1	0.174	0.174
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	Ant 1	52	5260	HTK	12.50	12.50	1.000	100	1.000	0	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Ant 1	52	5260	AWAN	12.50	12.50	1.000	100	1.000	0.05	0.249	0.249
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Ant 2	56	5280	HTK	12.40	12.50	1.023	100	1.000	0.1	0.153	0.157
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	56	5280	HTK	12.40	12.50	1.023	100	1.000	0.05	0.522	0.534
02	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	52	5260	HTK	12.40	12.50	1.023	100	1.000	-0.14	0.661	0.676
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	60	5300	HTK	12.40	12.50	1.023	100	1.000	0.02	0.519	0.531
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	64	5320	HTK	12.30	12.50	1.047	100	1.000	0.01	0.510	0.534
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	52	5260	AWAN	12.40	12.50	1.023	100	1.000	-0.14	0.467	0.478
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Ant 1	140	5700	HTK	12.90	13.00	1.023	100	1.000	0.17	0.269	0.275
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 1	140	5700	HTK	12.90	13.00	1.023	100	1.000	0.12	0.203	0.208
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	Ant 1	140	5700	HTK	12.90	13.00	1.023	100	1.000	0.03	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Ant 1	140	5700	AWAN	12.90	13.00	1.023	100	1.000	0.17	0.254	0.260
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Ant 2	116	5580	HTK	12.80	13.00	1.047	100	1.000	0.02	0.350	0.366
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	116	5580	HTK	12.80	13.00	1.047	100	1.000	-0.11	0.708	0.741
03	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	100	5500	HTK	12.70	13.00	1.072	100	1.000	-0.14	0.951	1.019
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	124	5620	HTK	12.80	13.00	1.047	100	1.000	0.02	0.645	0.675
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	132	5660	HTK	12.80	13.00	1.047	100	1.000	0.05	0.710	0.743
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	140	5700	HTK	12.70	13.00	1.072	100	1.000	0.06	0.689	0.738
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	144	5720	HTK	12.80	13.00	1.047	100	1.000	0.04	0.561	0.587
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	100	5500	AWAN	12.70	13.00	1.072	100	1.000	-0.14	0.300	0.321

Report No.: FA010919-02

TEL: 886-3-327-3456 Page 34 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020



SPORTON LAB. FCC SAR TEST REPORT

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Cycle	Duty Cycle Scaling Factor	Drift	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Ant 1	157	5785	HTK	11.50	11.50	1.000	100	1.000	0.03	0.229	0.229
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 1	157	5785	HTK	11.50	11.50	1.000	100	1.000	-0.11	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	Ant 1	157	5785	HTK	11.50	11.50	1.000	100	1.000	-0.12	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Ant 1	157	5785	AWAN	11.50	11.50	1.000	100	1.000	0.03	0.208	0.208
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0mm	Ant 2	157	5785	HTK	11.40	11.50	1.023	100	1.000	-0.14	0.264	0.270
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	157	5785	HTK	11.40	11.50	1.023	100	1.000	0.13	0.345	0.353
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	149	5745	HTK	11.20	11.50	1.072	100	1.000	0.17	0.410	0.439
04	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	165	5825	HTK	11.40	11.50	1.023	100	1.000	-0.15	0.443	0.453
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	165	5825	AWAN	11.40	11.50	1.023	100	1.000	-0.15	0.420	0.430

Report No.: FA010919-02

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Antenna	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Bottom of Laptop	0mm	Ant 2	39	2480	HTK	11.80	12.00	1.047	63.8	1.306	-0.06	0.016	0.022
05	Bluetooth	1Mbps	Bottom Face	0mm	Ant 2	39	2480	HTK	11.80	12.00	1.047	63.8	1.306	-0.16	0.038	0.052
	Bluetooth	1Mbps	Bottom Face	0mm	Ant 2	39	2480	AWAN	11.80	12.00	1.047	63.8	1.306	0	0.009	0.012

13.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)		Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	1	2412	HTK	15.40	15.50	1.023	100	1.000	0.02	1.170	-	1.197
2nd	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0mm	Ant 2	1	2412	HTK	15.40	15.50	1.023	100	1.000	0.01	1.080	1.08	1.105
1st	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	100	5500	HTK	12.70	13.00	1.072	100	1.000	-0.14	0.951	-	1.019
2nd	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	Ant 2	100	5500	HTK	12.70	13.00	1.072	100	1.000	-0.12	0.900	1.06	0.964

General Note:

- 1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
- 2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
- 3. The ratio is the difference in percentage between original and repeated measured SAR.
- 4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

TEL: 886-3-327-3456 Page 35 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	2.4GHz WLAN ANT 1 + 2.4GHz WLAN ANT 2	Yes
2.	5GHz WLAN ANT 1 + 5GHz WLAN ANT 2	Yes
3.	2.4GHz WLAN ANT 1 + BT ANT 2	Yes
4.	5GHz WLAN ANT 1 + BT ANT 2	Yes
5.	5GHz WLAN ANT 1 + 5GHz WLAN ANT 2 + BT ANT 2	Yes

General Note:

1. For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.

Report No.: FA010919-02

- 2. 2.4GHz WLAN and Bluetooth share the same antenna 2, and cannot transmit simultaneously.
- 3. The WLAN 2.4GHz and WLAN 5GHz cannot transmit simultaneously.
- 4. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- 5. The Scaled SAR summation is calculated based on the same configuration and test position.
- 6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) SPLSR = (SAR1 + SAR2)^1.5 / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x1-x2)2 + (y1-y2)2 + (z1-z2)2], where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 14.2.

14.1 Body Exposure Conditions

	1	2	3	4	5							
Exposure Position	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 2	Ig SAR	Ig SAR	Ig SAR	Ig SAR	3+4+5 Summed 1g SAR	SPLSR	Case No
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)		
Bottom Face at 0mm	1.000	1.147	0.208	1.019	0.052	2.147	1.227	1.052	0.260	1.279	0.01	Case 1
Bottom of Laptop at 0mm	1.120	1.197	0.275	0.366	0.022	2.317	0.641	1.142	0.297	0.663	0.01	Case 2
Edge 1 at 0mm		0.100				0.100	0.000	0.000	0.000	0.000		
Edge 4 at 0mm	0.062		0.001			0.062	0.001	0.062	0.001	0.001		

TEL: 886-3-327-3456 Page 36 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

14.2 SPLSR Evaluation and Analysis

General Note:

SPLSR = (SAR₁ + SAR₂)^{1.5} / (min. separation distance, mm). If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary

Report No.: FA010919-02

	Band	Position	SAR	Gap	SAR p	eak locatio	n (m)	3D distance	Summed SAR	SPLSR	Simultaneous
Case 1	Бапо	Position	(W/kg)	(cm)	Х	Y	Z	(mm)	(W/kg)	Results	SAR
Case 1	WLAN2.4G	Bottom of Laptop	1.12	0mm	-72.2	-158.6	2.11	288.0	2.32	0.01	Not required
	WLAN2.4G	вошотт от сартор	1.197	0mm	-102.2	127.8	2.43	200.0	2.32	0.01	Not required
		WLAN ANT1				>		WLAN ANT2			

	51	B. Marie	SAR	Gap	SAR p	eak locatio	n (m)	3D	Summed	SPLSR	Simultaneous
Case 1	Band	Position	(W/kg)	(cm)	Х	Y	Z	distance (mm)	SAR (W/kg)	Results	SAR
Case 1	WLAN2.4G	Bottom Face	1.147	0mm	97.4	128.2	1.94	294.0	2.15	0.01	Not required
	WLAN2.4G	BOILOITI FACE	1	0mm	58.2	-163.2	1.71	294.0	2.15	0.01	Not required
					•	>					
		WLAN ANT1			,						
					·	V		WLAN ANT2			

Test Engineer: Carter Jhuang and Kurt Liu

TEL: 886-3-327-3456 Page 37 of 38
FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020

15. <u>Uncertainty Assessment</u>

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be \leq 30%, for a confidence interval of k = 2. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Report No.: FA010919-02

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.

TEL: 886-3-327-3456 Page 38 of 38 FAX: 886-3-328-4978 Issued Date: Feb. 24, 2020