

FCC

SAR

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
**802.11a/b/g/n/ac RTL8822CE Combo
module**

ISSUED TO
Realtek Semiconductor Corp.

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

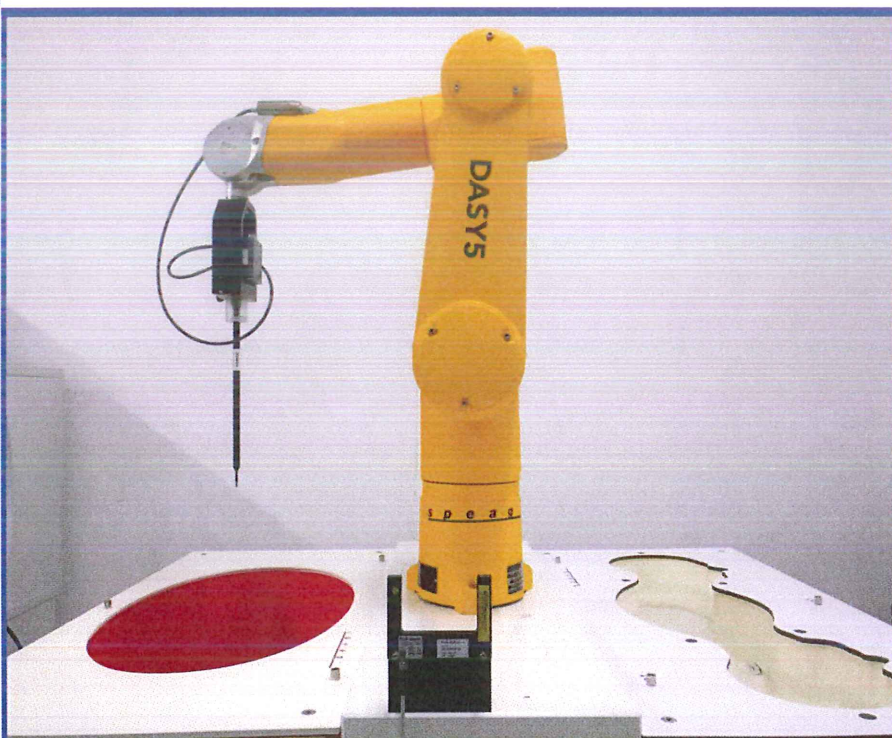

Tested by: *Zong Liyao*

Zong Liyao

Date: *Sep. 03, 2020*

Approved by: *Wei Yanquan*

Wei Yanquan
(Chief Engineer)

Date: *Sep. 03, 2020*

Report No.: BL-SZ2070564-701 (G1)

EUT Name: 802.11a/b/g/n/ac RTL8822CE Combo
module

Model Name: RTL8822CE

Brand Name: Realtek

FCC ID: TX2-RTL8822CE

Test Standard: FCC 47 CFR Part 2.1093

ANSI C95.1: 1999, IEEE 1528: 2013

Maximum SAR: Body 2.4GHz(1 g): 1.092 W/kg

Body 5GHz(1 g): 1.138 W/kg

Test Conclusion: Pass

Test Date: Aug. 08, 2020 ~ Sep. 01, 2020

Date of Issue: Sep. 03, 2020

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Aug. 27, 2020</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Sep. 03, 2020</u>	<u>Added Stand Mode SAR test in section 10.2,10.4, 10.6, Annex A and Annex B.</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Test Environment Condition	4
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Ancillary Equipment	7
2.6	Technical Information	7
3	SUMMARY OF TEST RESULT	8
3.1	Test Standards	8
3.2	Device Category and SAR Limit	9
3.3	Test Result Summary	10
3.4	Test Uncertainty	11
4	MEASUREMENT SYSTEM	12
4.1	Specific Absorption Rate (SAR) Definition	12
4.2	DASY SAR System	13
5	SYSTEM VERIFICATION	21
5.1	Purpose of System Check	21
5.2	System Check Setup	21
6	TEST POSITION CONFIGURATIONS	22
6.1	Laptop Exposure Condition	22
6.2	Tablet Exposure Condition	22

7	MEASUREMENT PROCEDURE.....	23
7.1	Measurement Process Diagram.....	23
7.2	SAR Scan General Requirement	24
7.3	Measurement Procedure.....	25
7.4	Area & Zoom Scan Procedure	25
8	CONDUCTED RF OUPUT POWER.....	26
8.1	WIFI.....	26
8.2	Bluetooth (Aux. Antenna)	32
9	TEST EXCLUSION CONSIDERATION.....	33
9.1	Laptop Mode antenna location sketch.....	33
9.2	Tent Mode antenna location sketch	34
9.3	Stand Mode antenna location sketch	35
9.4	Tablet Mode antenna location sketch.....	36
9.5	SAR Test Consideration Table.....	37
10	TEST RESULT	42
10.1	Bluetooth	42
10.2	Bluetooth (worst case with Stand mode).....	42
10.3	WIFI 2.4GHz.....	43
10.4	WIFI 2.4GHz (worst case with Stand mode)	44
10.5	WIFI 5GHz.....	44
10.6	WIFI 5GHz (worst case with Stand mode)	46
11	SAR Measurement Variability.....	47
12	SIMULTANEOUS TRANSMISSION	48
12.1	Simultaneous Transmission Mode Considerations	48
12.2	Sum SAR of Simultaneous Transmission	49
13	TEST EQUIPMENTS LIST	53
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	54
ANNEX B	SYSTEM CHECK RESULT	55
ANNEX C	TEST DATA.....	64
ANNEX D	EUT EXTERNAL PHOTOS	73
ANNEX E	SAR TEST SETUP PHOTOS.....	73
ANNEX F	CALIBRATION REPORT	73

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation (A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Test Environment Condition

Ambient Temperature	21°C to 23°C
Ambient Relative Humidity	36% to 48%
Ambient Pressure	100KPa to 102KPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

2.2 Manufacturer Information

Manufacturer	N/A
Address	N/A

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	802.11a/b/g/n/ac RTL8822CE Combo module
Model Name Under Test	RTL8822CE
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4.1 Host Information:

Product Name	notebook computer
Model Name	Yoga 7 14ITL5
Brand Name	Lenovo

2.4.2 Antenna Information:

Antenna Port	Model Name	Antenna Manufacturer	Antenna Type	Antenna Gain (dBi)			
				2.4 GHz	5.15 - 5.35 GHz	5.47 - 5.725 GHz	5.725 - 5.85 GHz
Main Antenna	DC33001P200	AWAN	PIFA	1.16	0.03	-1.41	-1.57
Auxiliary Antenna	DC33001P210		PIFA	-3.35	2.51	0.54	0.95
Main Antenna	DC33001NW00	Luxshare-ICT	PIFA	-1.44	-0.67	0.14	0.14
Auxiliary Antenna	DC33001NW10		PIFA	-2.97	-0.94	-1.43	-0.46
Note: The report only shown the antenna which matches the antenna with the highest antenna gain.							

2.5 Ancillary Equipment

Note: not application.

2.6 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac Band 1/2/3/4 SRD
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN, 5G WLAN, Bluetooth	
Frequency Range	802.11b/g /n(HT20/HT40)	2400 MHz ~ 2483.5 MHz
	802.11 ac(VHT20/HT40)	2400 MHz ~ 2483.5 MHz
	802.11a/n(HT20/ HT40) /ac(VHT20/VHT40/ VHT80)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	Bluetooth	2400 MHz ~ 2483.5 MHz
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna	
Hotspot Function	N/A	
Exposure Category	General Population/Uncontrolled exposure	
EUT Stage	Portable Device	
Product	Type	
	☒ Production unit	☐ Identical prototype

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
8	KDB 616217 D04v01r02	SAR for laptop and tablets

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR (1 g Value)

Band	Antenna	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)
		Body	Body
Bluetooth	Aux.	0.334	1.138
2.4G WLAN	Main	1.092	
2.4G WLAN	Aux.	0.721	
5.3G WLAN	Main	1.138	
5.3G WLAN	Aux.	0.819	
5.6G WLAN	Main	1.004	
5.6G WLAN	Aux.	0.878	
5.8G WLAN	Main	0.966	
5.8G WLAN	Aux.	0.779	
Limit (W/kg)		1.60	
Verdict		Pass	

3.4 Test Uncertainty

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 1.138 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

4 MEASUREMENT SYSTEM

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 DASY SAR System

4.2.1 DASY SAR System Diagram

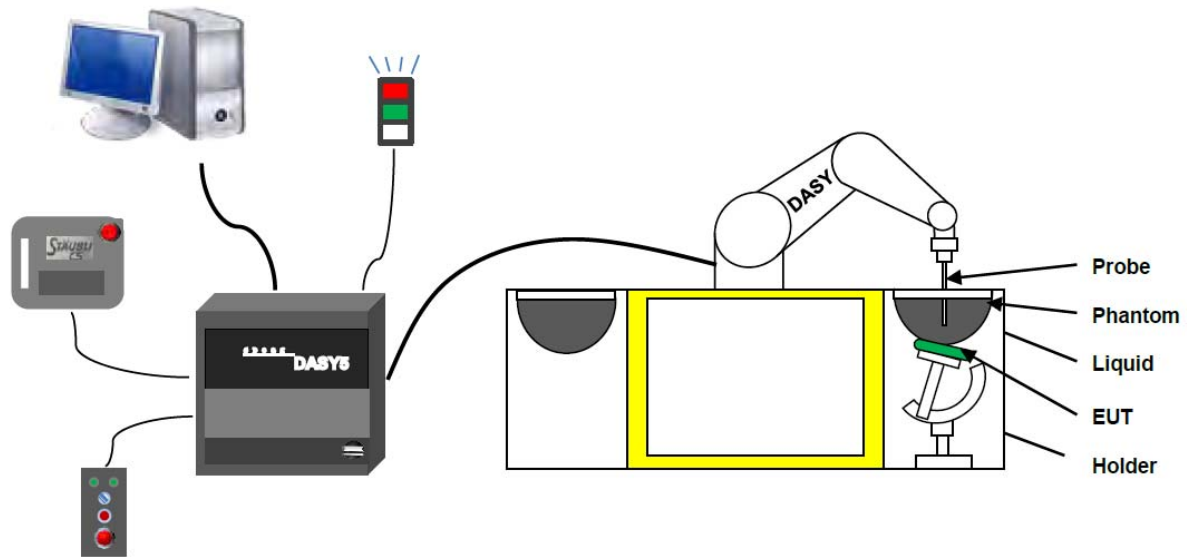

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision
(repeatability ± 0.02 mm)
- High reliability
(industrial design)
- Low maintenance costs
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
(brush less synchron motors; no stepper motors)
- Low ELF interference
(motor control _elds shielded via the closed metallic construction shields)

4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN: 3578 with following specifications is used

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ; ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)




E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1/2 annexe technique using reference guide at the five frequencies.

4.2.4 Data Acquisition Electronics

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

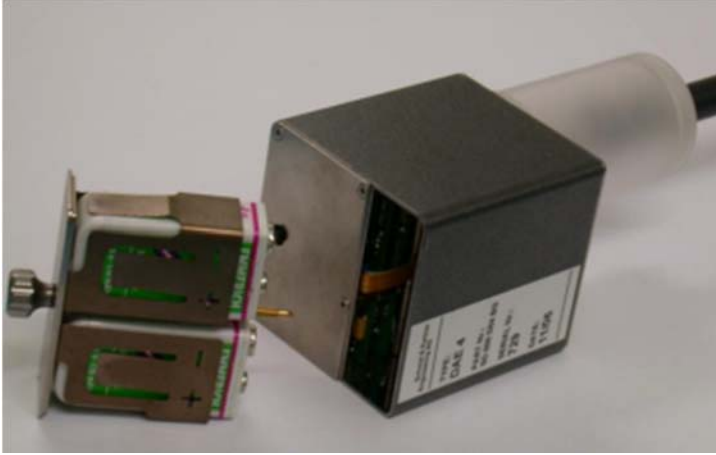

- Input Impedance: 200MOhm
- The Inputs: Symmetrical and Floating
- Commom Mode Rejection: Above 80dB

4.2.5 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



- Left hand
- Right hand
- Flat phantom

Photo of Phantom SN1857



Serial Number	Material	Length	Height
SN 1857 SAM	Vinylester, glass fiber reinforced	1000	500

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.



•Flat phantom

Photo of Phantom SN1012



Serial Number	Shell Thickness (mm)	Major ellipse axis (mm)	Minor axis (mm)
SN 1012 ELI4	2.0 ± 0.2	600	500

4.2.6 Device Holder

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA"s only. If necessary an additional support of polystyrene material is used. Larger DUT"s (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.



The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.54	47.86
5800	78.50	21.40			0.1		6.0	48.20


5 SYSTEM VERIFICATION

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup


In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

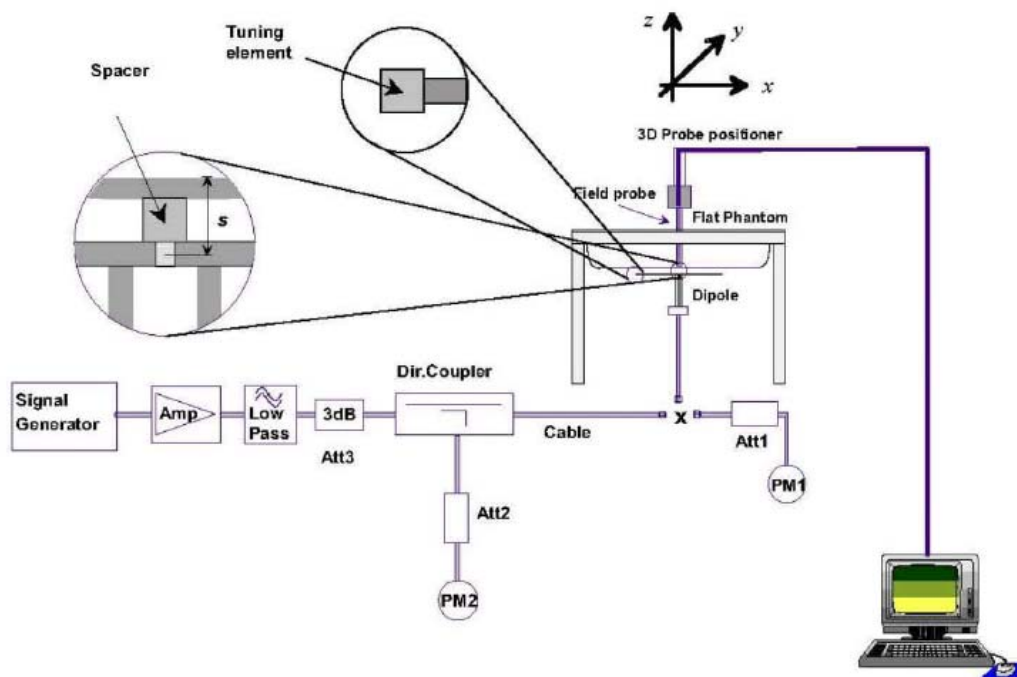

6 TEST POSITION CONFIGURATIONS

6.1 Laptop Exposure Condition

This DUT should consider one position which is bottom of laptop touching with phantom 0 mm air gap and the screen portion of the device shall be an open position at a 90° angle.

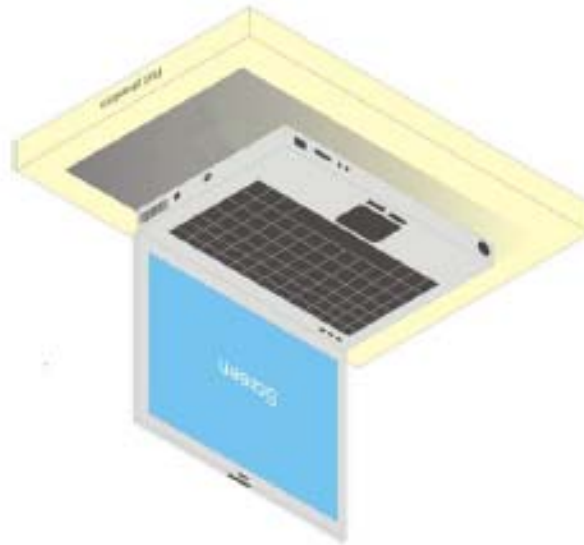

6.2 Tablet Exposure Condition

This DUT was tested in two different positions. They are back side and bottom edge in these positions, the surface of DUT is touching with phantom 0mm.


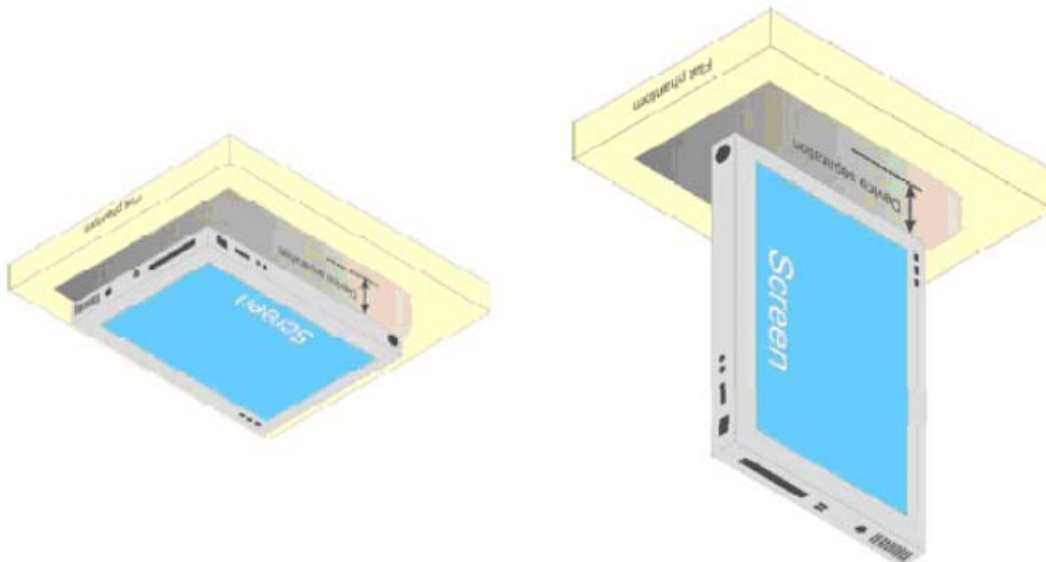


Fig Illustration for Lap-touching Position

7 MEASUREMENT PROCEDURE

7.1 Measurement Process Diagram

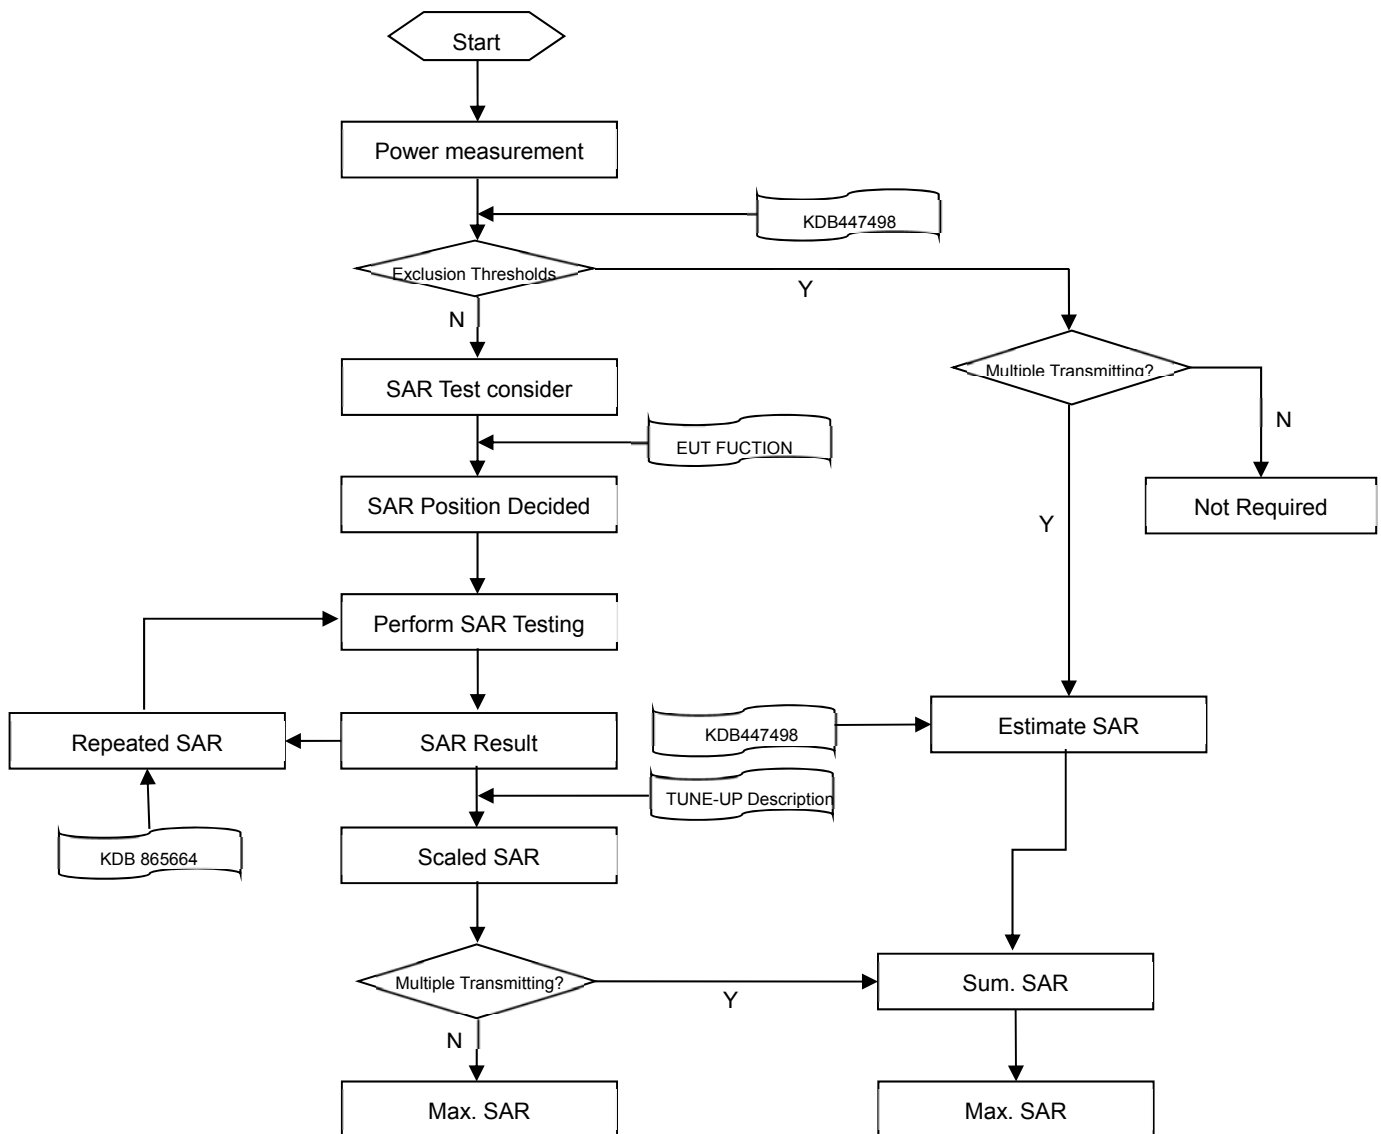

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	½·δ·ln(2)±0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
				5–6 GHz: ≤ 2 mm
		Δz Zoom (n>1): between subsequent points		≤ 1.5·Δz Zoom (n-1)
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm
Note:				
1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8 CONDUCTED RF OUTPUT POWER

8.1 WIFI

8.1.1 2.4G WIFI (Main Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	17.82	18.00	Yes
		6	2437	17.91	18.00	Yes
		11	2462	17.77	18.00	Yes
		12	2467	14.01	14.50	No
		13	2472	10.07	10.50	No
	802.11g	1	2412	13.78	14.50	No
		6	2437	16.71	17.00	No
		11	2462	13.92	14.50	No
		12	2467	11.03	11.50	No
		13	2472	8.06	8.50	No
	802.11n(HT20)	1	2412	13.66	14.50	No
		6	2437	16.97	17.00	No
		11	2462	13.98	14.50	No
		12	2467	11.14	11.50	No
		13	2472	8.15	8.50	No
	802.11n(HT40)	3	2422	12.88	13.50	No
		6	2437	16.82	17.00	No
		9	2452	14.08	14.50	No
		10	2457	11.05	11.50	No
		11	2462	7.49	7.50	No
	802.11ac(VHT20)	1	2412	13.71	14.50	No
		6	2437	16.72	17.00	No
		11	2462	13.98	14.50	No
		12	2467	11.15	11.50	No
		13	2472	7.94	8.50	No
	802.11ac(VHT40)	3	2422	12.77	13.50	No
		6	2437	16.81	17.00	No
		9	2452	14.17	14.50	No
		10	2457	11.07	11.50	No
		11	2462	7.45	7.50	No

8.1.2 2.4G WIFI (Aux. Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	17.92	18.00	Yes
		6	2437	17.86	18.00	Yes
		11	2462	17.87	18.00	Yes
		12	2467	14.11	14.50	No
		13	2472	9.78	10.50	No
	802.11g	1	2412	13.95	14.50	No
		6	2437	16.87	17.00	No
		11	2462	13.60	14.50	No
		12	2467	10.95	11.50	No
		13	2472	8.02	8.50	No
	802.11n(HT20)	1	2412	14.01	14.50	No
		6	2437	16.46	17.00	No
		11	2462	14.00	14.50	No
		12	2467	10.94	11.50	No
		13	2472	7.99	8.50	No
	802.11n(HT40)	3	2422	12.87	13.50	No
		6	2437	16.70	17.00	No
		9	2452	13.45	14.50	No
		10	2457	10.91	11.50	No
		11	2462	7.44	7.50	No
	802.11ac(VHT20)	1	2412	14.07	14.50	No
		6	2437	16.82	17.00	No
		11	2462	14.12	14.50	No
		12	2467	11.09	11.50	No
		13	2472	8.13	8.50	No
	802.11ac(VHT40)	3	2422	12.78	13.50	No
		6	2437	16.97	17.00	No
		9	2452	13.48	14.50	No
		10	2457	11.02	11.50	No
		11	2462	7.41	7.50	No

8.1.3 5G WIFI (Main Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	11.32	11.50	No
		40	5200	11.23	11.50	No
		48	5240	11.24	11.50	No
	802.11n(HT20)	36	5180	11.35	11.50	No
		40	5200	11.33	11.50	No
		48	5240	11.25	11.50	No
	802.11n(HT40)	38	5190	11.28	11.50	No
		46	5230	11.40	11.50	No
	802.11ac(VHT20)	36	5180	11.30	11.50	No
		40	5200	11.36	11.50	No
		48	5240	11.22	11.50	No
	802.11ac(VHT40)	38	5190	11.22	11.50	No
		46	5230	11.38	11.50	No
	802.11ac(VHT80)	42	5210	11.39	11.50	No
5.3 (5.25~5.35)	802.11a	52	5260	11.36	11.50	No
		60	5300	11.27	11.50	No
		64	5320	11.30	11.50	No
	802.11n(HT20)	52	5260	11.29	11.50	No
		60	5300	11.24	11.50	No
		64	5320	11.37	11.50	No
	802.11n(HT40)	54	5270	11.33	11.50	No
		62	5310	11.39	11.50	No
	802.11ac(VHT20)	52	5260	11.30	11.50	No
		60	5300	11.32	11.50	No
		64	5320	11.35	11.50	No
	802.11ac(VHT40)	54	5270	11.19	11.50	No
		62	5310	11.33	11.50	No
	802.11ac(VHT80)	58	5290	11.11	11.50	Yes
5.6 (5.47~5.725)	802.11a	100	5500	12.36	12.50	No
		116	5580	12.34	12.50	No
		140	5700	12.32	12.50	No
		144	5720	12.28	12.50	No
	802.11n(HT20)	100	5500	12.42	12.50	No
		116	5580	12.31	12.50	No
		140	5700	12.26	12.50	No
		144	5720	12.40	12.50	No
	802.11n(HT40)	102	5510	12.46	12.50	No
		110	5550	12.42	12.50	No
		134	5670	12.34	12.50	No
		142	5710	12.34	12.50	No
	802.11ac(VHT20)	100	5500	12.45	12.50	No
		116	5580	12.41	12.50	No

		140	5700	12.39	12.50	No
		144	5720	12.34	12.50	No
	802.11ac(VHT40)	102	5510	12.39	12.50	No
		110	5550	12.35	12.50	No
		134	5670	12.27	12.50	No
		142	5710	12.21	12.50	No
	802.11ac(VHT80)	106	5530	12.39	12.50	Yes
		122	5610	12.30	12.50	Yes
		138	5690	12.41	12.50	Yes
5.8 (5.725~5.850)	802.11a	149	5745	11.79	12.00	No
		157	5785	11.81	12.00	No
		165	5825	11.95	12.00	No
	802.11n(HT20)	149	5745	11.97	12.00	No
		157	5785	11.76	12.00	No
		165	5825	11.33	12.00	No
	802.11n(HT40)	151	5755	11.68	12.00	No
		159	5795	11.21	12.00	No
	802.11ac(VHT20)	149	5745	11.40	12.00	No
		157	5785	11.75	12.00	No
		165	5825	11.37	12.00	No
	802.11ac(VHT40)	151	5755	11.65	12.00	No
		159	5795	11.63	12.00	No
	802.11ac(VHT80)	155	5775	11.84	12.00	Yes

8.1.4 5G WIFI (Aux. Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Power Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	11.34	11.50	No
		40	5200	11.42	11.50	No
		48	5240	11.29	11.50	No
	802.11n(HT20)	36	5180	11.30	11.50	No
		40	5200	11.37	11.50	No
		48	5240	11.47	11.50	No
	802.11n(HT40)	38	5190	11.29	11.50	No
		46	5230	11.44	11.50	No
	802.11ac(VHT20)	36	5180	11.48	11.50	No
		40	5200	11.17	11.50	No
		48	5240	11.44	11.50	No
	802.11ac(VHT40)	38	5190	11.26	11.50	No
		46	5230	11.31	11.50	No
5.3 (5.25~5.35)	802.11a	52	5260	11.17	11.50	No
		60	5300	11.32	11.50	No
		64	5320	11.27	11.50	No
	802.11n(HT20)	52	5260	11.39	11.50	No
		60	5300	11.20	11.50	No
		64	5320	11.31	11.50	No
	802.11n(HT40)	54	5270	11.38	11.50	No
		62	5310	11.46	11.50	No
	802.11ac(VHT20)	52	5260	11.44	11.50	No
		60	5300	11.41	11.50	No
		64	5320	11.48	11.50	No
	802.11ac(VHT40)	54	5270	11.46	11.50	No
		62	5310	11.22	11.50	No
5.6 (5.47~5.725)	802.11a	100	5500	12.40	12.50	No
		116	5580	12.33	12.50	No
		140	5700	12.28	12.50	No
		144	5720	12.40	12.50	No
	802.11n(HT20)	100	5500	12.37	12.50	No
		116	5580	12.45	12.50	No
		140	5700	12.27	12.50	No
		144	5720	12.39	12.50	No
	802.11n(HT40)	102	5510	12.42	12.50	No
		110	5550	12.38	12.50	No
		134	5670	12.43	12.50	No
		142	5710	12.00	12.50	No
	802.11ac(VHT20)	100	5500	12.36	12.50	No
		116	5580	12.43	12.50	No


		140	5700	12.47	12.50	No
		144	5720	12.39	12.50	No
	802.11ac(VHT40)	102	5510	12.44	12.50	No
		110	5550	12.30	12.50	No
		134	5670	12.45	12.50	No
		142	5710	12.47	12.50	No
	802.11ac(VHT80)	106	5530	12.45	12.50	Yes
		122	5610	12.47	12.50	Yes
		138	5690	12.32	12.50	Yes
5.8 (5.725~5.850)	802.11a	149	5745	11.78	12.00	No
		157	5785	11.79	12.00	No
		165	5825	11.83	12.00	No
	802.11n(HT20)	149	5745	11.81	12.00	No
		157	5785	11.89	12.00	No
		165	5825	11.97	12.00	No
	802.11n(HT40)	151	5755	11.91	12.00	No
		159	5795	11.98	12.00	No
	802.11ac(VHT20)	149	5745	11.87	12.00	No
		157	5785	11.85	12.00	No
		165	5825	11.71	12.00	No
	802.11ac(VHT40)	151	5755	11.61	12.00	No
		159	5795	11.61	12.00	No
	802.11ac(VHT80)	155	5775	11.93	12.00	Yes

8.2 Bluetooth (Aux. Antenna)


Mode	GFSK			$\pi/4$ -DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Conducted Power (dBm)	12.37	12.46	12.53	9.21	9.16	9.25
Tune-up Power Limit (dBm)	13.00			9.50		
Mode	8-DPSK			-		
Channel	0	39	78	-	-	-
Frequency (MHz)	2402	2441	2480	-	-	-
Conducted Power (dBm)	9.22	9.19	9.26	-	-	-
Tune-up Power Limit (dBm)	10.00					
Mode	BLE (1Mbps)			BLE (2Mbps)		
Channel	0	20	39	0	20	39
Frequency (MHz)	2402	2442	2480	2402	2442	2480
Conducted Power (dBm)	11.23	11.16	11.25	11.20	11.16	11.25
Tune-up Power Limit (dBm)	11.50			11.50		

9 TEST EXCLUSION CONSIDERATION


9.1 Laptop Mode antenna location sketch

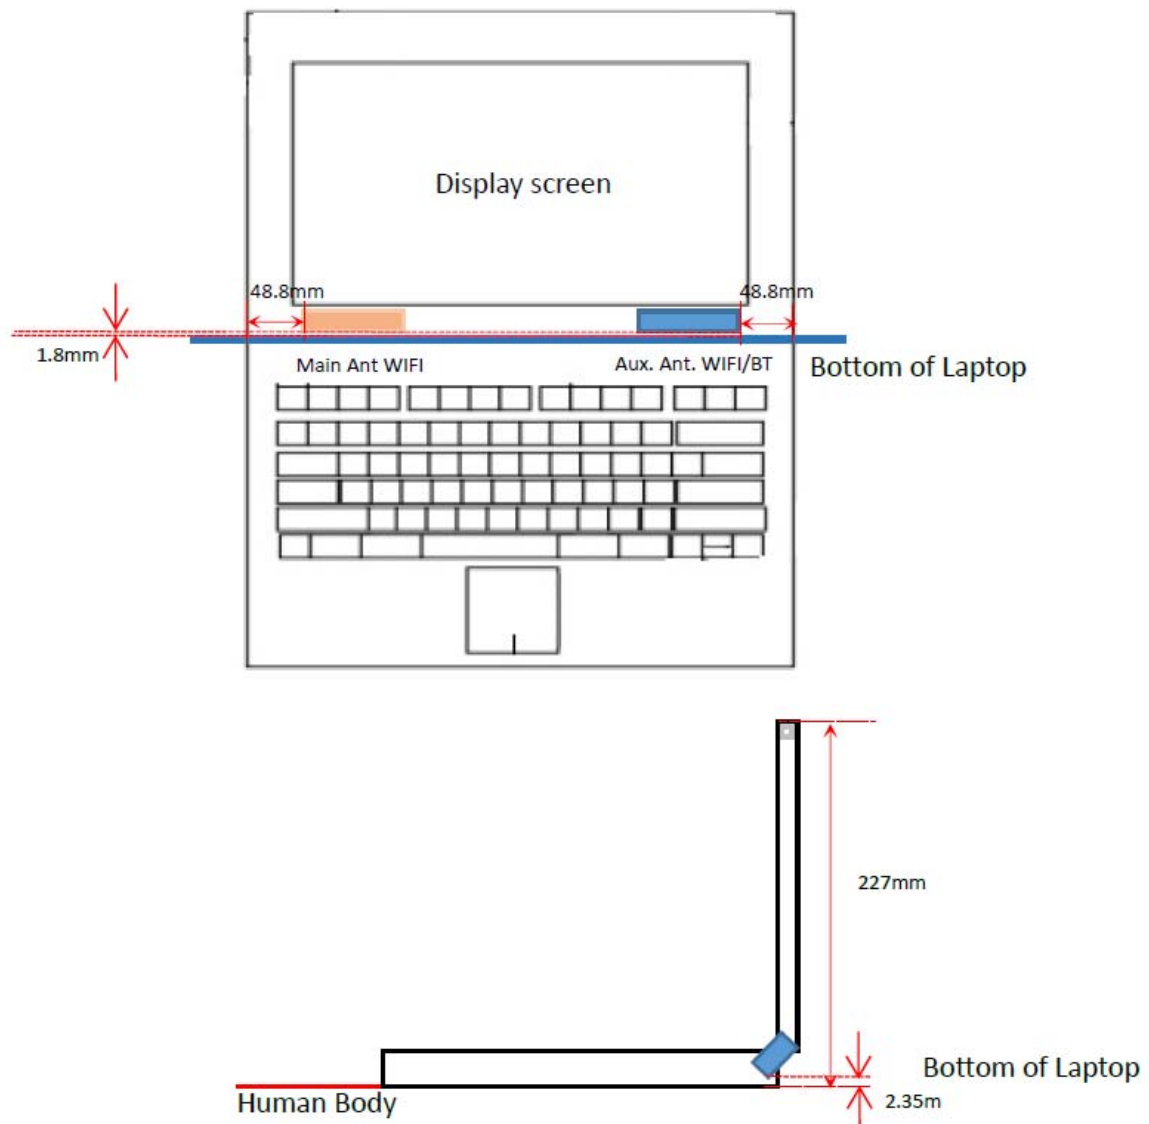


9.2 Tent Mode antenna location sketch

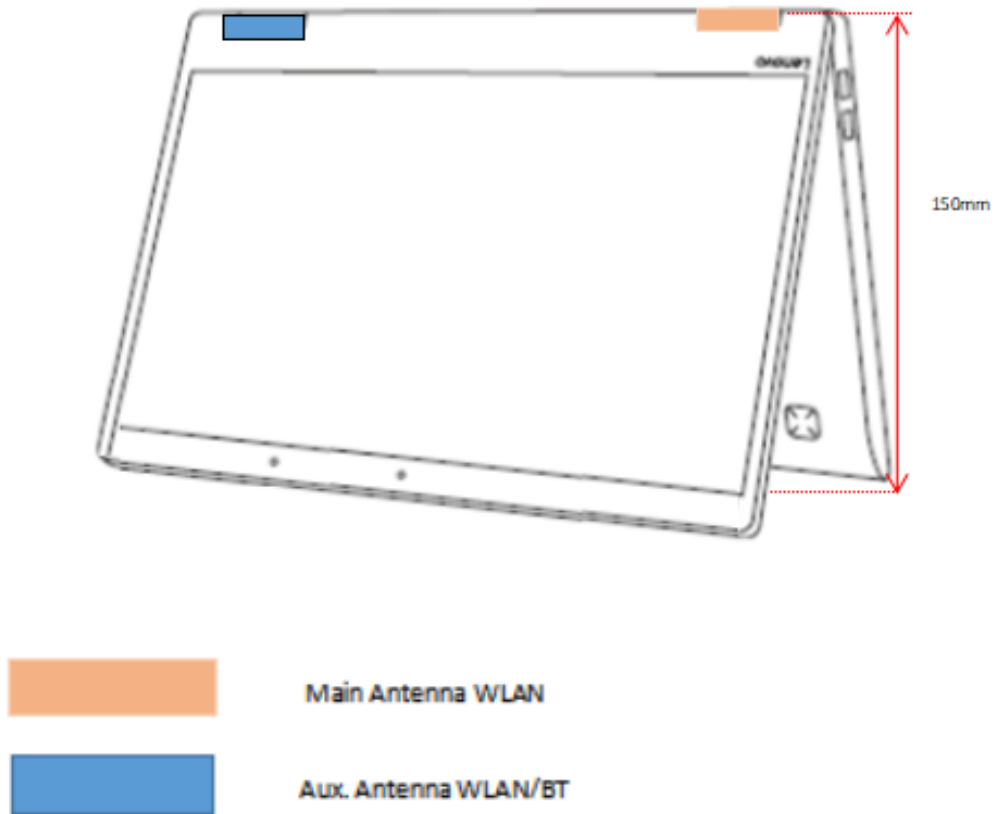

9.3 Stand Mode antenna location sketch

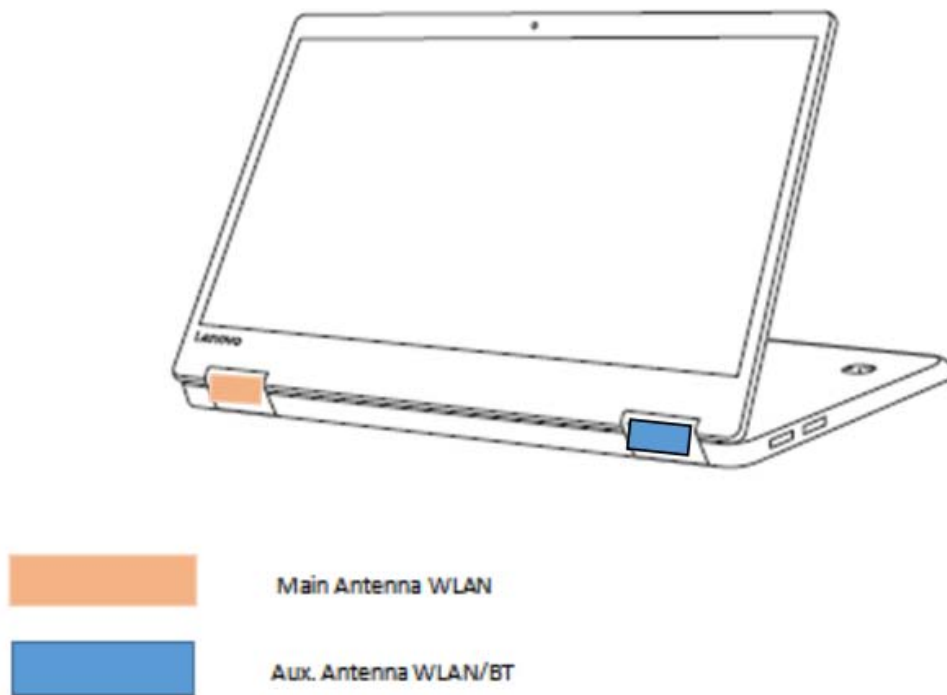

9.4 Tablet Mode antenna location sketch

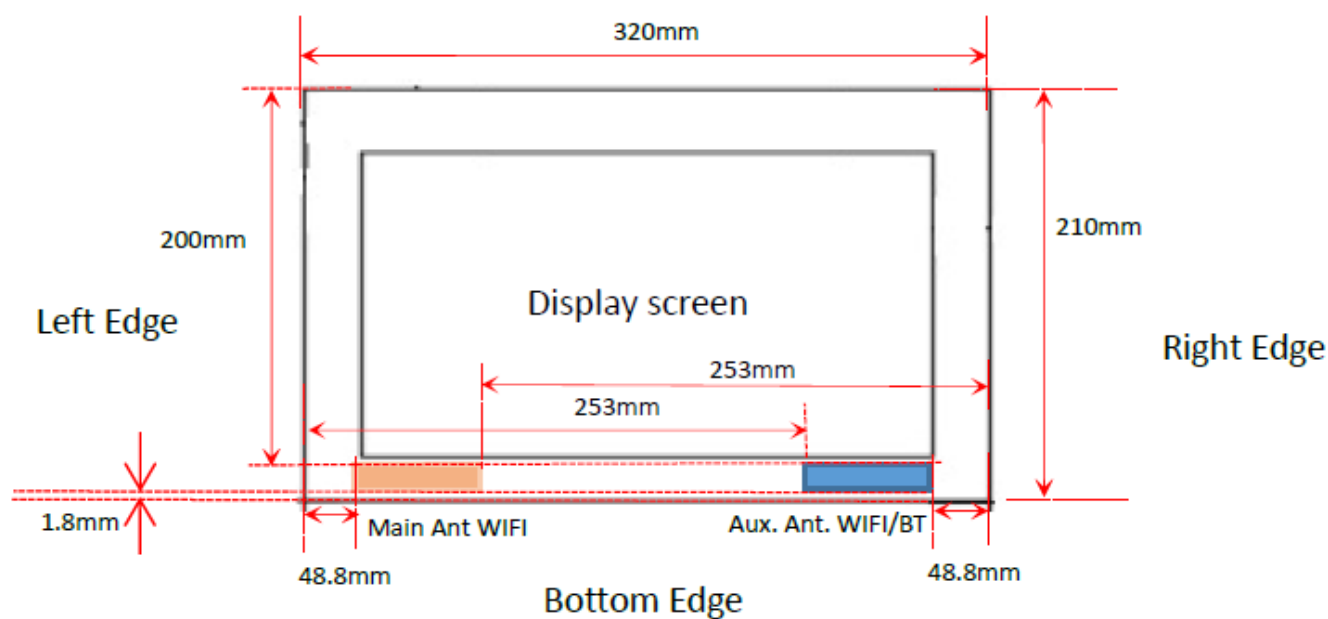


Main Antenna

Position	Back Side	Left Edge	Right Edge	Top Edge
Distance(mm)	2.0	48.8	253	1.8

Aux. Antenna

Position	Back Side	Left Edge	Right Edge	Top Edge
Distance(mm)	2.0	253	48.8	1.8

EUT Side View



Main Antenna WLAN



Aux. Antenna WLAN/BT

9.5 SAR Test Consideration Table

According with FCC KDB 447498 D01, Appendix A, <SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm> Table, this Device SAR test configurations consider as following :

9.5.1 Laptop mode SAR Test Exclusion Consideration

Main Antenna

Test Position Configurations	Mode	WLAN 2.4GHz	WLAN 5.2&5.3GHz	WLAN 5.6GHz	WLAN 5.8GHz
Bottom of Laptop	Distance to User (mm)	1.8			
	Max. Peak Power (dBm)	18.00	11.50	12.50	12.00
	Max. Peak Power (mW)	63.10	14.13	17.78	15.85
	Exclusion Threshold	19.8	6.8	8.7	7.7
	SAR Test Required	Yes	Yes	Yes	Yes

Aux. Antenna

Test Position Configurations	Mode	Bluetooth	WLAN 2.4GHz	WLAN 5.2&5.3GHz	WLAN 5.6GHz	WLAN 5.8GHz
Bottom of Laptop	Distance to User (mm)	1.8				
	Max. Peak Power (dBm)	13.00	18.00	11.50	12.50	12.00
	Max. Peak Power (mW)	20.00	63.10	14.13	17.78	15.85
	Exclusion Threshold	6.30	19.8	6.8	8.7	7.7
	SAR Test Required	Yes	Yes	Yes	Yes	Yes

9.5.2 Tent mode SAR Test Exclusion Consideration

Main Antenna

Test Position Configurations	Mode	WLAN 2.4GHz	WLAN 5.2&5.3GHz	WLAN 5.6GHz	WLAN 5.8GHz
Bottom of Laptop	Distance to User (mm)	150.0			
	Max. Peak Power (dBm)	18.00	11.50	12.50	12.00
	Max. Peak Power (mW)	63.10	14.13	17.78	15.85
	Exclusion Threshold (mW)	1096.0	1062.0	1062.0	1062.0
	SAR Test Required	No	No	No	No

Aux. Antenna

Test Position Configurations	Mode	Bluetooth	WLAN 2.4GHz	WLAN 5.2&5.3GHz	WLAN 5.6GHz	WLAN 5.8GHz
Bottom of Laptop	Distance to User (mm)	150.0				
	Max. Peak Power (dBm)	13.00	18.00	11.50	12.50	12.00
	Max. Peak Power (mW)	20.00	63.10	14.13	17.78	15.85
	Exclusion Threshold (mW)	1095.0	1096.0	1062.0	1062.0	1062.0
	SAR Test Required	No	No	No	No	No

9.5.3 Stand mode SAR Test Consideration

For stand mode verified the worst value of Bluetooth, 2.4G WLAN and 5G WLAN.

9.5.4 Tablet mode SAR Test Exclusion Consideration

Main Antenna

Band	Mode	Max. Peak Power		Test Position Configurations				
				Back Side (with keyboard)	Left Edge	Right Edge	Top Edge	Bottom Edge
		dBm	mW					
Distance to User (mm)				2.0	48.8	253.0	200.0	1.8
WLAN 2.4 G	SAR Test Required							
	Exclusion Threshold			19.8	19.8	2126.0	1596.0	2.0
	802.11b	18.00	63.10	Yes	No	No	No	Yes
	802.11g	17.00	50.12	No	No	No	No	No
	802.11n(HT20)	17.00	50.12	No	No	No	No	No
	802.11n(HT40)	17.00	50.12	No	No	No	No	No
	802.11ac(HT20)	17.00	50.12	No	No	No	No	No
	802.11ac(HT20)	17.00	50.12	No	No	No	No	No
WLAN 5.2 G	Exclusion Threshold			6.8	6.8	2092.0	1562.0	0.7
	802.11a	11.50	14.13	No	No	No	No	No
	802.11n(HT20)	11.50	14.13	No	No	No	No	No
	802.11n(HT40)	11.50	14.13	No	No	No	No	No
	802.11ac(HT20)	11.50	14.13	No	No	No	No	No
	802.11ac(HT40)	11.50	14.13	No	No	No	No	No

	802.11ac(HT80)	11.50	14.13	No	No	No	No	No
WLAN 5.3G	Exclusion Threshold			6.8	6.8	2092.0	1562.0	0.7
	802.11a	11.50	14.13	No	No	No	No	No
	802.11n(HT20)	11.50	14.13	No	No	No	No	No
	802.11n(HT40)	11.50	14.13	No	No	No	No	No
	802.11ac(HT20)	11.50	14.13	No	No	No	No	No
	802.11ac(HT40)	11.50	14.13	No	No	No	No	No
	802.11ac(HT80)	11.50	14.13	Yes	No	No	No	Yes
WLAN 5.6 G	Exclusion Threshold			8.7	8.7	2092.0	1562.0	0.9
	802.11a	12.50	17.78	No	No	No	No	No
	802.11n(HT20)	12.50	17.78	No	No	No	No	No
	802.11n(HT40)	12.50	17.78	No	No	No	No	No
	802.11ac(HT20)	12.50	17.78	No	No	No	No	No
	802.11ac(HT40)	12.50	17.78	No	No	No	No	No
	802.11ac(HT80)	12.50	17.78	Yes	No	No	No	Yes
WLAN 5.8 G	Exclusion Threshold			7.7	7.7	2092.0	1562.0	0.8
	802.11a	12.00	15.85	No	No	No	No	No
	802.11n(HT20)	12.00	15.85	No	No	No	No	No
	802.11n(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT20)	12.00	15.85	No	No	No	No	No
	802.11ac(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT80)	12.00	15.85	Yes	No	No	Yes	Yes

Aux Antenna

Band	Mode	Max. Peak Power		Test Position Configurations				
				Back Side	Left	Right	Top	Bottom
		dBm	mW	(with keyboard)	Edge	Edge	Edge	Edge
Distance to User (mm)				2.0	253.0	48.8	200.0	1.8
WLAN 2.4 G	SAR Test Required							
	Exclusion Threshold			19.8	2126.0	19.8	1596.0	2.0
	802.11b	18.00	63.10	Yes	No	No	No	Yes
	802.11g	17.00	50.12	No	No	No	No	No
	802.11n(HT20)	17.00	50.12	No	No	No	No	No
	802.11n(HT40)	17.00	50.12	No	No	No	No	No
	802.11ac(HT20)	17.00	50.12	No	No	No	No	No
	802.11ac(HT20)	17.00	50.12	No	No	No	No	No
WLAN 5.2 G	Exclusion Threshold			6.8	2092.0	6.8	1562.0	0.7
	802.11a	11.50	14.13	No	No	No	No	No
	802.11n(HT20)	11.50	14.13	No	No	No	No	No
	802.11n(HT40)	11.50	14.13	No	No	No	No	No
	802.11ac(HT20)	11.50	14.13	No	No	No	No	No
	802.11ac(HT40)	11.50	14.13	No	No	No	No	No
	802.11ac(HT80)	11.50	14.13	No	No	No	No	No
WLAN 5.3G	Exclusion Threshold			6.8	2092.0	6.8	1562.0	0.7
	802.11a	11.50	14.13	No	No	No	No	No
	802.11n(HT20)	11.50	14.13	No	No	No	No	No
	802.11n(HT40)	11.50	14.13	No	No	No	No	No
	802.11ac(HT20)	11.50	14.13	No	No	No	No	No
	802.11ac(HT40)	11.50	14.13	No	No	No	No	No
	802.11ac(HT80)	11.50	14.13	Yes	No	No	No	Yes
WLAN 5.6 G	Exclusion Threshold			8.7	2092.0	8.7	1562.0	0.9
	802.11a	12.50	17.78	No	No	No	No	No
	802.11n(HT20)	12.50	17.78	No	No	No	No	No
	802.11n(HT40)	12.50	17.78	No	No	No	No	No
	802.11ac(HT20)	12.50	17.78	No	No	No	No	No
	802.11ac(HT40)	12.50	17.78	No	No	No	No	No
	802.11ac(HT80)	12.50	17.78	Yes	No	No	No	Yes
WLAN 5.8 G	Exclusion Threshold			7.7	2092.0	7.7	1562.0	0.8
	802.11a	12.00	15.85	No	No	No	No	No
	802.11n(HT20)	12.00	15.85	No	No	No	No	No
	802.11n(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT20)	12.00	15.85	No	No	No	No	No
	802.11ac(HT40)	12.00	15.85	No	No	No	No	No
	802.11ac(HT80)	12.00	15.85	Yes	No	No	No	Yes
Bluetooth	Exclusion Threshold			2.0	2126.0	6.3	1596.0	0.6
	BR/EDR	13.0	20.00	Yes	No	No	No	Yes

	BLE	11.50	14.13	No	No	No	No	No
Note: - Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units - Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user. - Per KDB 447498 D01, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold - Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by: $[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR}$ and ≤ 7.5 for 10-g extremity SAR $f(\text{GHz})$ is the RF channel transmit frequency in GHz - Power and distance are rounded to the nearest mW and mm before calculation - The result is rounded to one decimal place for comparison - For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare. - Per KDB 447498 D01, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz - Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA /HSUPA /DC-HSDPA output power is < 0.25dB higher than RMC12.2Kbps, or reported SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/kg}$, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded. - Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate - Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. - When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration. - When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$. - Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions. - When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is $\leq 1.2 \text{ W/kg}$, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR. - When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.								

10 TEST RESULT

10.1 Bluetooth

Mode	Antenna Manufa cturer	Anten na	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1g Scaled SAR (W/kg)	Meas. No.	
Body																
DH5	ICT	Aux.	Laptop	Bottom Side	0	78	2480	0.06	0.042	12.53	13.00	1.114	76.95	1.300	0.061	/
			Tablet	Bottom Edge	0	78	2480	-0.07	0.149	12.53	13.00	1.114	76.95	1.300	0.216	/
					0	0	2402	0.01	0.222	12.37	13.00	1.156	76.95	1.300	0.334	1#
					0	39	2441	-0.08	0.127	12.49	13.00	1.125	76.95	1.300	0.186	/
				Back Side (with keyboard)	0	78	2480	0.09	0.034	12.53	13.00	1.114	76.95	1.300	0.049	/
	Awan		Laptop	Bottom Side	0	78	2480	-0.08	0.027	12.53	13.00	1.114	76.95	1.300	0.039	/
			Tablet	Bottom Edge	0	78	2480	-0.05	0.124	12.53	13.00	1.114	76.95	1.300	0.180	/
				Back Side (with keyboard)	0	78	2480	0.00	0.021	12.53	13.00	1.114	76.95	1.300	0.030	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

10.2 Bluetooth (worst case with Stand mode)

Mode	Antenna Manufa cturer	Anten na	Position		Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1g Scaled SAR (W/kg)	Meas No.
Body																
DH5	ICT	Aux.	Stand	Back Side (with keyboard)	0	0	2402	-0.09	0.128	12.37	13.00	1.156	76.95	1.300	0.192	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

10.3WIFI 2.4GHz

Mode	Antenna Manufa cturer	Anten na	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1g Scaled SAR (W/kg)	Meas. No.	
Body																
802.11 b	ICT	Main	Laptop	Bottom Side	0	6	2437	0.02	0.965	17.91	18.00	1.021	100.00	1.000	0.985	/
			Tablet	Bottom Edge	0	6	2437	-0.01	1.070	17.91	18.00	1.021	100.00	1.000	1.092	2#
					0	1	2412	-0.13	1.020	17.82	18.00	1.042	100.00	1.000	1.063	/
					0	11	2462	0.01	0.673	17.77	18.00	1.054	100.00	1.000	0.710	/
				Back Side (with keyboard)	0	6	2437	0.13	0.748	17.91	18.00	1.021	100.00	1.000	0.764	/
			Laptop	Bottom Side	0	6	2437	-0.06	0.457	17.91	18.00	1.021	100.00	1.000	0.467	/
			Tablet	Bottom Edge	0	6	2437	-0.04	0.862	17.91	18.00	1.021	100.00	1.000	0.880	/
					0	1	2412	0.15	0.991	17.82	18.00	1.042	100.00	1.000	1.033	/
					0	11	2462	-0.05	0.714	17.77	18.00	1.054	100.00	1.000	0.753	/
				Back Side (with keyboard)	0	6	2437	0.19	0.792	17.91	18.00	1.021	100.00	1.000	0.809	/
	ICT	Aux.	Laptop	Bottom Side	0	1	2412	0.04	0.700	17.92	18.00	1.019	100.00	1.000	0.713	/
			Tablet	Bottom Edge	0	1	2412	0.06	0.708	17.92	18.00	1.019	100.00	1.000	0.721	3#
					0	6	2437	-0.19	0.537	17.86	18.00	1.033	100.00	1.000	0.555	/
					0	11	2462	-0.16	0.496	17.87	18.00	1.030	100.00	1.000	0.511	/
				Back Side (with keyboard)	0	1	2412	0.07	0.683	17.92	18.00	1.019	100.00	1.000	0.696	/
			Laptop	Bottom Side	0	1	2412	0.01	0.613	17.92	18.00	1.019	100.00	1.000	0.624	/
			Tablet	Bottom Edge	0	1	2412	-0.05	0.682	17.92	18.00	1.019	100.00	1.000	0.695	/
				Back Side (with keyboard)	0	1	2412	-0.11	0.647	17.92	18.00	1.019	100.00	1.000	0.659	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

10.4WIFI 2.4GHz (worst case with Stand mode)

Mode	Antenna Manufa cturer	Anten na	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1g Scaled SAR (W/kg)	Meas. No.
Body															
802.11 b	ICT	Main	Stand	Back Side (with keyboard)	0	6	2437	0.12	0.648	17.91	18.00	1.021	100.00	1.000	0.662 /
Note: Refer to ANNEX C for the detailed test data for each test configuration.															

10.5WIFI 5GHz

Mode	Antenna Manufa cturer	Anten na	Position	Dist. (mm)	Ch.	Freq. (MHz)	Powe r Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1g Scaled SAR (W/kg)	Meas. No.		
5.3G Body																	
802.11 ac (VHT8 0)	ICT	Main	Laptop	Bottom Side	0	58	5290	0.10	0.348	11.11	11.50	1.094	100.00	1.000	0.381	/	
			Tablet	Bottom Edge	0	58	5290	0.03	1.040	11.11	11.50	1.094	100.00	1.000	1.138	4#	
				Back Side (with keyboard)	0	58	5290	0.02	0.462	11.11	11.50	1.094	100.00	1.000	0.505	/	
	Awan		Laptop	Bottom Side	0	58	5290	-0.07	0.319	11.11	11.50	1.094	100.00	1.000	0.349	/	
			Tablet	Bottom Edge	0	58	5290	-0.03	0.933	11.11	11.50	1.094	100.00	1.000	1.021	/	
				Back Side (with keyboard)	0	58	5290	-0.17	0.334	11.11	11.50	1.094	100.00	1.000	0.365	/	
	ICT		Aux.	Laptop	Bottom Side	0	58	5270	0.06	0.283	11.20	11.50	1.072	100.00	1.000	0.303	/
				Tablet	Bottom Edge	0	58	5270	-0.12	0.764	11.20	11.50	1.072	100.00	1.000	0.819	5#
					Back Side (with keyboard)	0	58	5270	-0.17	0.244	11.20	11.50	1.072	100.00	1.000	0.261	/
	Awan			Laptop	Bottom Side	0	58	5270	0.03	0.208	11.20	11.50	1.072	100.00	1.000	0.223	/
Tablet				Bottom Edge	0	58	5270	-0.13	0.443	11.20	11.50	1.072	100.00	1.000	0.475	/	

				Back Side (with keyboard)	0	58	5270	-0.04	0.235	11.20	11.50	1.072	100.00	1.000	0.252	/
5.6G Body																
802.11 ac (VHT8 0)	ICT	Main	Laptop	Bottom Side	0	138	5690	-0.03	0.264	12.41	12.50	1.021	100.00	1.000	0.270	/
			Tablet	Bottom Edge	0	138	5690	0.13	0.833	12.41	12.50	1.021	100.00	1.000	0.850	/
					0	106	5530	-0.13	0.979	12.39	12.50	1.026	100.00	1.000	1.004	6#
					0	122	5610	0.15	0.875	12.30	12.50	1.047	100.00	1.000	0.916	/
				Back Side (with keyboard)	0	138	5690	-0.11	0.403	12.41	12.50	1.021	100.00	1.000	0.411	/
	Awan		Laptop	Bottom Side	0	138	5690	-0.01	0.238	12.41	12.50	1.021	100.00	1.000	0.243	/
			Tablet	Bottom Edge	0	138	5690	-0.04	0.814	12.41	12.50	1.021	100.00	1.000	0.831	/
					0	106	5530	0.08	0.732	12.39	12.50	1.026	100.00	1.000	0.751	/
					0	122	5610	-0.01	0.808	12.30	12.50	1.047	100.00	1.000	0.846	/
				Back Side (with keyboard)	0	138	5690	0.00	0.319	12.41	12.50	1.021	100.00	1.000	0.326	/
	ICT	Aux.	Laptop	Bottom Side	0	122	5610	-0.12	0.363	12.47	12.50	1.007	100.00	1.000	0.366	/
			Tablet	Bottom Edge	0	122	5610	-0.15	0.792	12.47	12.50	1.007	100.00	1.000	0.797	/
					0	106	5530	-0.15	0.602	12.45	12.50	1.012	100.00	1.000	0.609	/
					0	138	5690	0.05	0.842	12.32	12.50	1.042	100.00	1.000	0.878	7#
				Back Side (with keyboard)	0	122	5610	0.07	0.344	12.47	12.50	1.007	100.00	1.000	0.346	/
	Awan		Laptop	Bottom Side	0	122	5610	-0.05	0.231	12.47	12.50	1.007	100.00	1.000	0.233	/
			Tablet	Bottom Edge	0	122	5610	-0.12	0.622	12.47	12.50	1.007	100.00	1.000	0.626	/
					0	106	5530	-0.13	0.508	12.45	12.50	1.012	100.00	1.000	0.514	/
					0	138	5690	0.15	0.533	12.32	12.50	1.042	100.00	1.000	0.556	/
				Back Side (with keyboard)	0	122	5610	-0.15	0.194	12.47	12.50	1.007	100.00	1.000	0.195	/
5.8G Body																
802.11 ac (VHT8 0)	ICT	Main	Laptop	Bottom Side	0	155	5775	0.15	0.252	11.84	12.00	1.038	100.00	1.000	0.261	/
			Tablet	Bottom Edge	0	155	5775	-0.09	0.931	11.84	12.00	1.038	100.00	1.000	0.966	8#
				Back Side (with keyboard)	0	155	5775	-0.15	0.297	11.84	12.00	1.038	100.00	1.000	0.308	/
	Awan		Laptop	Bottom Side	0	155	5775	0.03	0.232	11.84	12.00	1.038	100.00	1.000	0.241	/

			Tablet	Bottom Edge	0	155	5775	0.16	0.929	11.84	12.00	1.038	100.00	1.000	0.964	/
				Back Side (with keyboard)	0	155	5775	-0.13	0.216	11.84	12.00	1.038	100.00	1.000	0.224	/
	ICT	Aux.	Laptop	Bottom Side	0	155	5775	-0.08	0.294	11.93	12.00	1.016	100.00	1.000	0.299	/
			Tablet	Bottom Edge	0	155	5775	0.08	0.767	11.93	12.00	1.016	100.00	1.000	0.779	9#
				Back Side (with keyboard)	0	155	5775	-0.07	0.306	11.93	12.00	1.016	100.00	1.000	0.311	/
			Laptop	Bottom Side	0	155	5775	-0.11	0.174	11.93	12.00	1.016	100.00	1.000	0.177	/
	Awan		Tablet	Bottom Edge	0	155	5775	0.11	0.492	11.93	12.00	1.016	100.00	1.000	0.500	/
				Back Side (with keyboard)	0	155	5775	0.17	0.190	11.93	12.00	1.016	100.00	1.000	0.193	/

Note: Refer to ANNEX C for the detailed test data for each test configuration.

10.6WIFI 5GHz (worst case with Stand mode)

Mode	Antenna Manufa- cturer	Anten- na	Position		Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty Factor	1g Scaled SAR (W/kg)	Meas. No.
Body																
802.11 ac (VHT80)	ICT	Main	Stand	Back Side (with keyboard)	0	58	5290	0.14	0.706	11.11	11.50	1.094	100.00	1.000	0.772	/

Note: Refer to ANNEX C for the detailed test data for each test configuration.

11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Frequency Band (MHz)	Wireless Band	Antenna Manufacturer	Antenna	RF Exposure Conditions	Test Position		Highest Measured SAR (W/kg)	Repeated SAR (Yes/No)	Repeated ^{1st} Measured SAR (W/kg)	Largest to Smallest SAR Radio
2437	802.11b	ICT	Main	Body	Tablet	Bottom Edge	1.070	Yes	0.937	1.14
5290	802.11ac(VHT80)	ICT	Main	Body	Tablet	Bottom Edge	1.040	Yes	0.974	1.07
5530	802.11ac(VHT80)	ICT	Main	Body	Tablet	Bottom Edge	0.979	Yes	0.925	1.06
5775	802.11ac(VHT80)	ICT	Main	Body	Tablet	Bottom Edge	0.931	Yes	0.923	1.01

Note: The ratio of largest to smallest SAR for the original and first repeated measurements is < 1.20 , the second repeated measurement is not required.

12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

According KDB 447498 D01v06, simultaneous transmission:

- a) $SPLSR = (SAR1 + SAR2)^{1.5} / R_i$ (min. separation distance, mm), and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
SAR1 is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.
SAR2 is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition as the first.
- b) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
- c) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

12.1 Simultaneous Transmission Mode Considerations

NO.	Mode	2.4G WLAN & 5G WLAN & Bluetooth
		Body
1	2.4 G WLAN (Main Antenna)	+ 2.4 G WLAN (Auxiliary Antenna)
2	2.4 G WLAN (Main Antenna)	+ Bluetooth (Auxiliary Antenna)
3	5 G WLAN (Main Antenna)	+ 5 G WLAN (Auxiliary Antenna)
4	5 G WLAN (Main Antenna)	+ Bluetooth (Auxiliary Antenna)
Note:		
1. When stand-alone SAR is not required for a transmitter or antenna, its SAR is considered zero in the SAR summing process to assess Multi-band transmission SAR compliance.		
2. The EUT supports the Auxiliary Antenna with TX/RX diversity function for WLAN and Bluetooth, the Main Antenna with TX/RX diversity function for WLAN.		
3. WLAN 2.4GHz and Bluetooth will not be transmitting from the Auxiliary Antenna at same time.		

12.2 Sum SAR of Simultaneous Transmission


12.2.1 Highest Bluetooth and WLAN Sum Body SAR of Simultaneous Transmission

Test Mode	Position	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)	SPLSR Num.
Body (Separation 0 mm)						
Laptop	Bottom Side	2.4 G WLAN (Main Antenna)	0.985	1.698	Yes	1#
		2.4 G WLAN (Auxiliary Antenna)	0.713			
		2.4 G WLAN (Main Antenna)	0.985	1.046	No	/
		Bluetooth (Auxiliary Antenna)	0.061			
		5 G WLAN (Main Antenna)	0.381	0.747	No	/
		5 G WLAN (Auxiliary Antenna)	0.366			
		5 G WLAN (Main Antenna)	0.381	0.442	No	/
		Bluetooth (Auxiliary Antenna)	0.061			

Test Mode	Position	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)	SPLSR Num.
Body (Separation 0 mm)						
Tablet	Back Side	2.4 G WLAN (Main Antenna)	0.809	1.505	No	/
		2.4 G WLAN (Auxiliary Antenna)	0.696			
		2.4 G WLAN (Main Antenna)	0.809	0.858	No	/
		Bluetooth (Auxiliary Antenna)	0.049			
		5.3 G WLAN (Main Antenna)	0.505	0.766	No	/
		5.3 G WLAN (Auxiliary Antenna)	0.261			
		5.6 G WLAN (Main Antenna)	0.411	0.757	No	/
		5.6 G WLAN (Auxiliary Antenna)	0.346			
		5.8 G WLAN (Main Antenna)	0.308	0.619	No	/
		5.8 G WLAN (Auxiliary Antenna)	0.311			
		5 G WLAN (Main Antenna)	0.505	0.554	No	/
		Bluetooth (Auxiliary Antenna)	0.049			
	Bottom Edge	2.4 G WLAN (Main Antenna)	1.092	1.813	Yes	2#
		2.4 G WLAN (Auxiliary Antenna)	0.721			
		2.4 G WLAN (Main Antenna)	1.092	1.426	No	/
		Bluetooth (Auxiliary Antenna)	0.334			
		5.3 G WLAN (Main Antenna)	1.138	1.957	Yes	3#
		5.3 G WLAN (Auxiliary Antenna)	0.819			
		5.6 G WLAN (Main Antenna)	1.004	1.882	Yes	4#
		5.6 G WLAN (Auxiliary Antenna)	0.878			
		5.8 G WLAN (Main Antenna)	0.966	1.745	Yes	5#
		5.8 G WLAN (Auxiliary Antenna)	0.779			
		5 G WLAN (Main Antenna)	1.138	1.472	No	/
		Bluetooth (Auxiliary Antenna)	0.334			


SPLSR Analysis 1#

Test Mode	Position	Antenna	Reported 1g Max. SAR (W/kg)	Coordinates (m)			3D Distance (mm)	1g Sum SAR (W/kg)	SPLSR	Simultaneous SAR Test (Yes/No)
				X	Y	Z				
Laptop	Bottom Side	2.4 G WLAN (Main Antenna)	0.985	0.00321	-0.125	-0.175	250.0	1.70	0.01	No
		2.4 G WLAN (Auxiliary Antenna)	0.713	0.000825	0.125	-0.175				

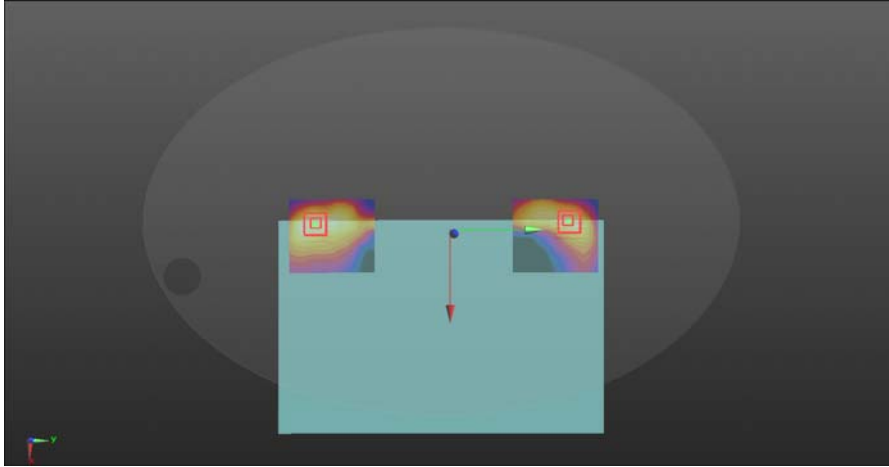


SPLSR Analysis 2#

Test Mode	Position	Antenna	Reported 1g Max. SAR (W/kg)	Coordinates (m)			3D Distance (mm)	1g Sum SAR (W/kg)	SPLSR	Simultaneous SAR Test (Yes/No)
				X	Y	Z				
Laptop	Bottom Edge	2.4 G WLAN (Main Antenna)	1.092	0.00444	0.104	-0.175	203.5	1.81	0.01	No
		2.4 G WLAN (Auxiliary Antenna)	0.721	0.00304	-0.0995	-0.175				

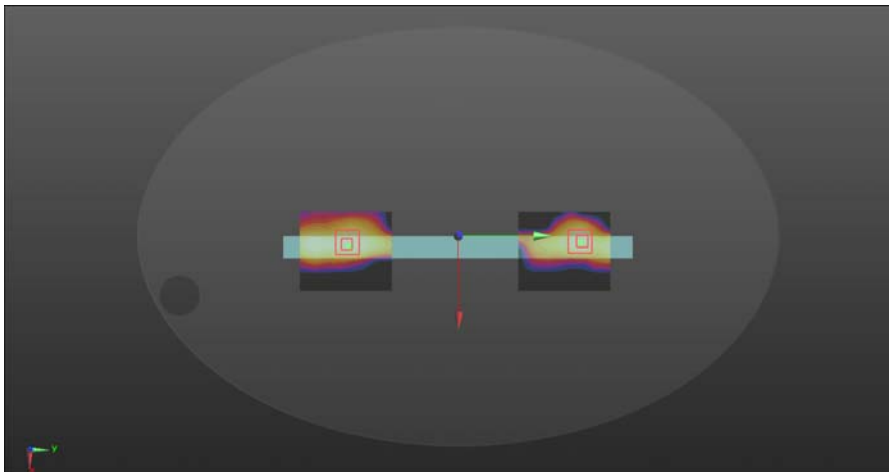


SPLSR Analysis 3#

Test Mode	Position	Antenna	Reported 1g Max. SAR (W/kg)	Coordinates (m)			3D Distance (mm)	1g Sum SAR (W/kg)	SPLSR	Simultaneous SAR Test (Yes/No)
				X	Y	Z				
Laptop	Bottom Edge	5.3 G WLAN (Main Antenna)	1.138	-0.00799	0.115	-0.177	233.0	1.96	0.01	No
		5.3 G WLAN (Auxiliary Antenna)	0.819	-0.00998	-0.118	-0.177				

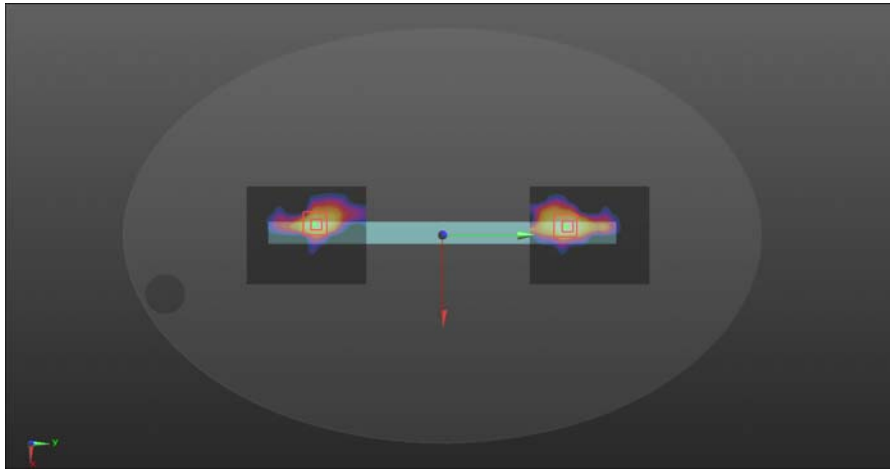


SPLSR Analysis 4#

Test Mode	Position	Antenna	Reported 1g Max. SAR (W/kg)	Coordinates (m)			3D Distance (mm)	1g Sum SAR (W/kg)	SPLSR	Simultaneous SAR Test (Yes/No)
				X	Y	Z				
Laptop	Bottom Edge	5.6 G WLAN (Main Antenna)	1.004	-0.00799	0.117	-0.177	235.0	1.88	0.01	No
		5.6 G WLAN (Auxiliary Antenna)	0.878	-0.0093	-0.118	-0.177				

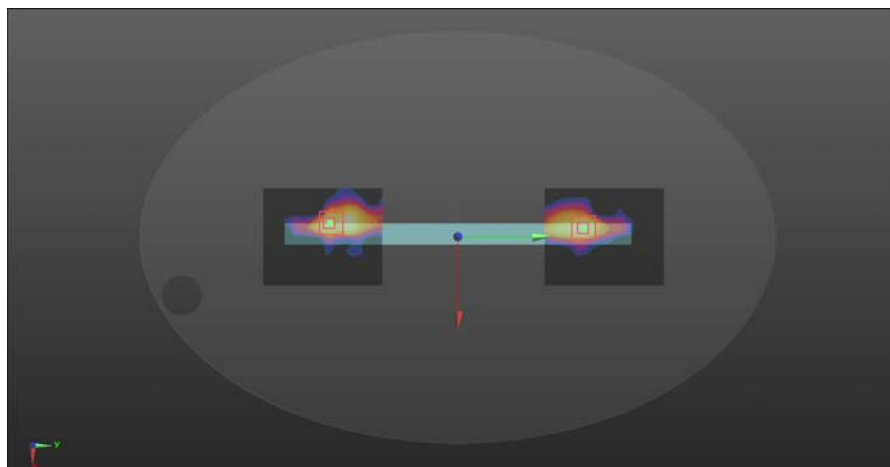

SPLSR Analysis 5#

Test Mode	Position	Antenna	Reported 1g Max. SAR (W/kg)	Coordinates (m)			3D Distance (mm)	1g Sum SAR (W/kg)	SPLSR	Simultaneous SAR Test (Yes/No)
				X	Y	Z				
Laptop	Bottom Edge	5.8 G WLAN (Main Antenna)	0.966	-0.00802	0.119	-0.177	237.0	1.75	0.01	No
		5.8 G WLAN (Auxiliary Antenna)	0.779	-0.0093	-0.118	-0.177				

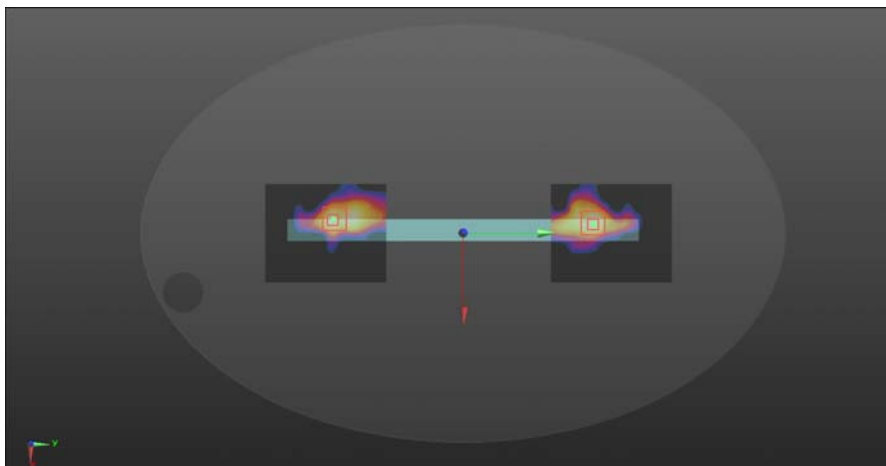

13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test Software	Speag	DASY5	52.8.8.1222	N/A	N/A
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2019/06/10	2021/06/09
5GHz Validation Dipole	Speag	D5GHzV2	SN: 1200	2020/02/17	2021/02/16
E-Field Probe	Speag	EX3DV4	SN: 3578	2020/07/06	2021/07/05
Data Acquisition Electronics	Speag	DAE3	SN: 360	2019/10/16	2020/10/15
Signal Generator	R&S	SMB100A	177746	2020/06/08	2021/06/07
Power Meter	R&S	NRVD-B2	7250BJ-0112/2011	2019/10/30	2020/10/29
Power Sensor	R&S	NRV-Z4	100381	2019/10/30	2020/10/29
Power Sensor	R&S	NRV-Z2	100211	2019/10/30	2020/10/29
Network Analyzer	R&S	ZVL-6	101380	2020/06/22	2021/06/21
Thermometer	Elitech	RC-4HC	N/A	2019/11/02	2020/11/01
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Dielectric Probe Kit	SATIMO	SCLMP	SN 25/13 OCPG56	N/A	N/A
Phantom1	Speag	SAM	SN: 1859	N/A	N/A
Phantom2	Speag	ELI4	SN: 1012	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2020.08.15	Head	2450	21.2	1.83	38.80	1.80	39.20	1.67	-1.02
2020.08.08	Head	5200	21.3	4.60	36.68	4.66	35.99	-1.29	1.92
2020.08.08	Head	5300	21.3	4.81	35.56	4.76	35.87	1.05	-0.86
2020.08.09	Head	5500	21.2	5.04	36.35	4.96	35.64	1.61	1.99
2020.08.09	Head	5600	21.2	5.15	35.93	5.07	35.53	1.58	1.13
2020.08.10	Head	5800	21.3	5.37	34.99	5.27	35.30	1.90	-0.88
2020.09.01	Head	2450	21.5	1.84	39.43	1.80	39.20	2.22	0.59
2020.09.01	Head	5300	21.3	4.82	35.28	4.76	35.87	1.26	-1.64

Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$.

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %(for 1 g).

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2020.08.15	Head	2450	100	5.320	53.20	52.60	1.14
2020.08.08	Head	5200	100	7.760	77.60	73.90	5.01
2020.08.08	Head	5300	100	7.630	76.30	78.10	-2.30
2020.08.09	Head	5500	100	7.690	76.90	81.10	-5.18
2020.08.09	Head	5600	100	7.720	77.20	80.30	-3.86
2020.08.10	Head	5800	100	7.420	74.20	76.90	-3.51
2020.09.01	Head	2450	100	5.52	52.20	52.60	4.94
2020.09.01	Head	5300	100	7.68	76.80	78.10	-1.66

Note: The tolerance limit of System validation $\pm 10\%$.

System Performance Check Data (2450MHz Head)

Date: 2020.08.15

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.832$ S/m; $\epsilon_r = 38.804$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.55, 7.55, 7.55); Calibrated: 2020.07.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW2450 Head 100mw /Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.08 W/kg


CW2450 Head 100mw /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.28 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.32 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 6.05 W/kg

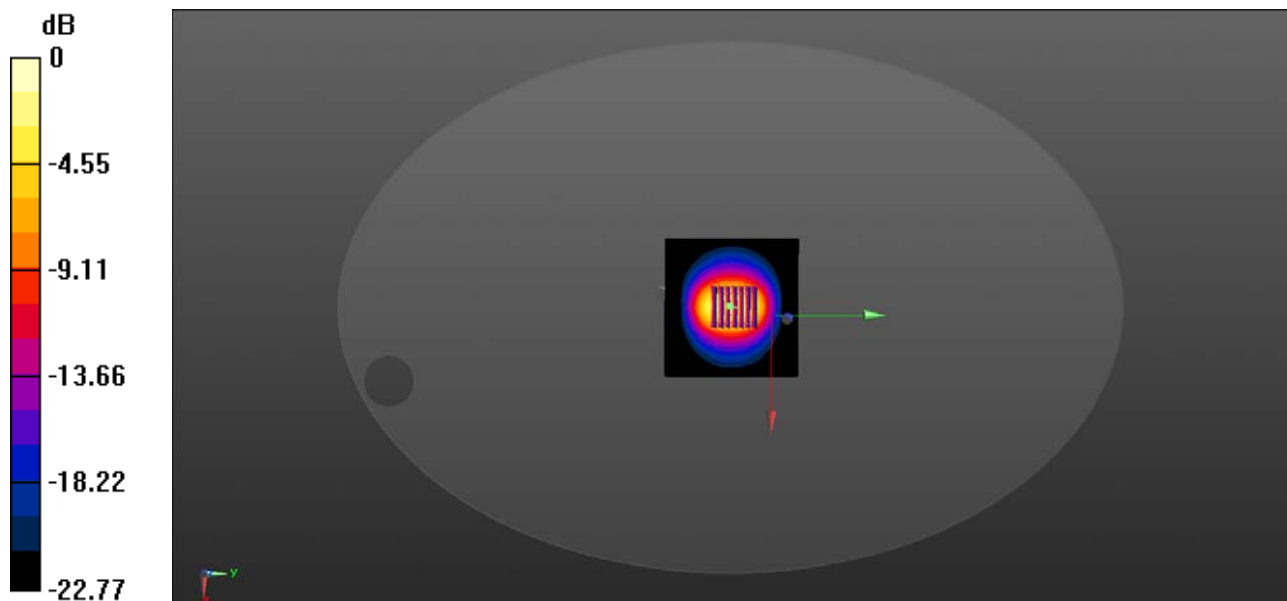

0 dB = 6.05 W/kg

System Performance Check Data (5200MHz Head)

Date: 2020.08.08

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5200$ MHz; $\sigma = 4.597$ S/m; $\epsilon_r = 36.676$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.43, 5.43, 5.43); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW5200 Head 100mw /Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.48 W/kg


CW5200 Head 100mw /Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 31.45 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

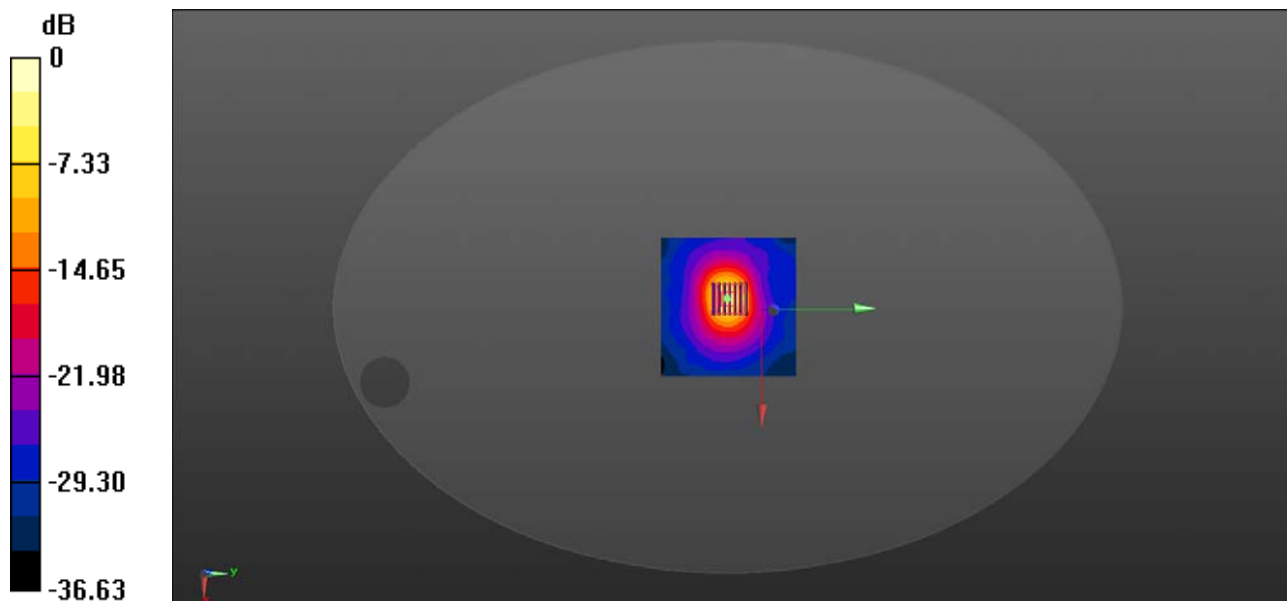

0 dB = 17.6 W/kg

System Performance Check Data (5300MHz Head)

Date: 2020.08.08

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.812$ S/m; $\epsilon_r = 35.56$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.43, 5.43, 5.43); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 5300/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 7.97 W/kg


CW 5300/Zoom Scan (7x7x21)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 33.89 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 7.63 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 15.3 W/kg

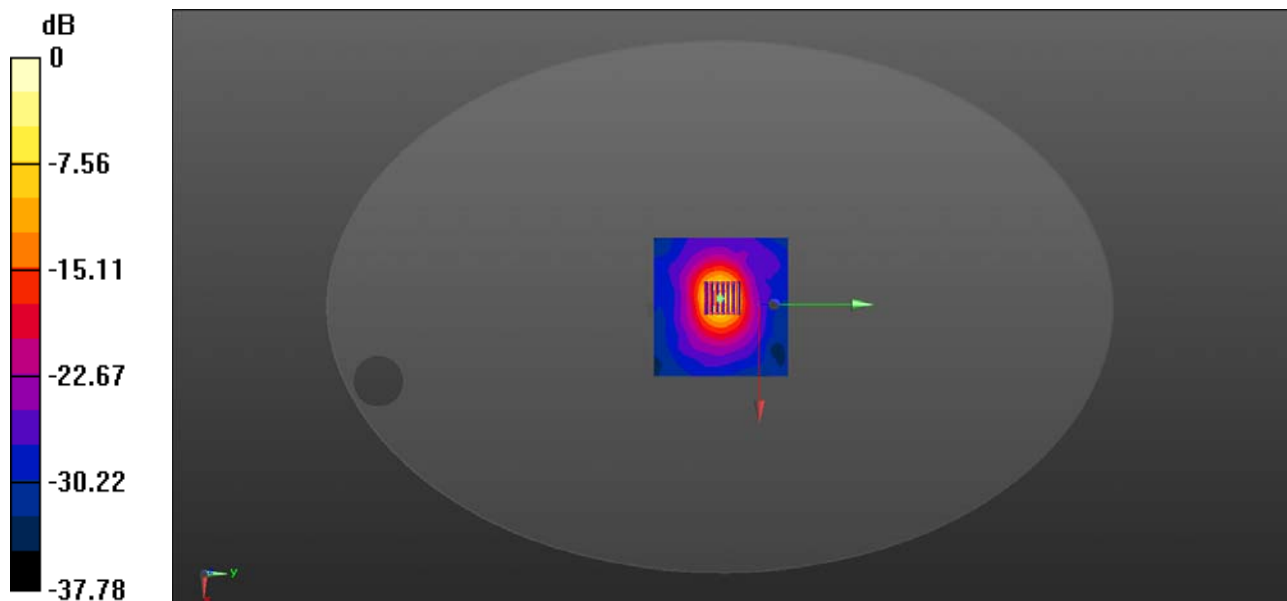

0 dB = 15.3 W/kg

System Performance Check Data (5500MHz Head)

Date: 2020.08.09

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.043$ S/m; $\epsilon_r = 36.345$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.8, 4.8, 4.8); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW5500 Head 100mw /Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.36 W/kg


CW5500 Head 100mw /Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 35.70 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 16.3 W/kg

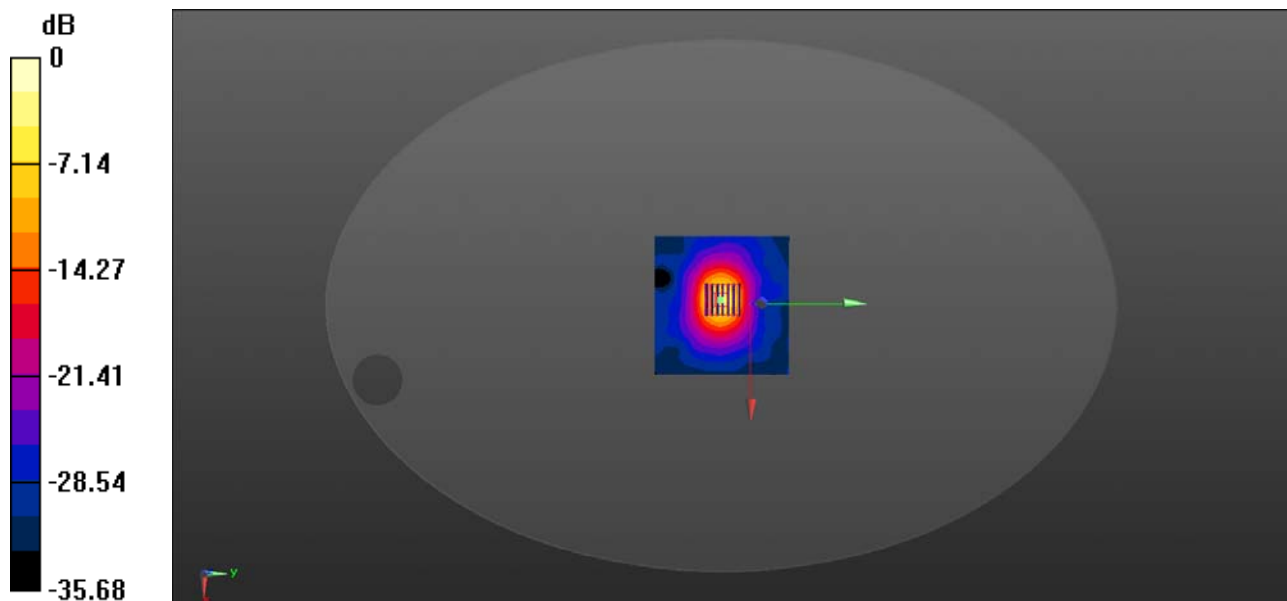

0 dB = 16.3 W/kg

System Performance Check Data (5600MHz Head)

Date: 2020.08.09

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.146$ S/m; $\epsilon_r = 35.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.8, 4.8, 4.8); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 5600/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 8.43 W/kg


CW 5600/Zoom Scan (7x7x21)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 35.96 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 32.8 W/kg

SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 16.5 W/kg

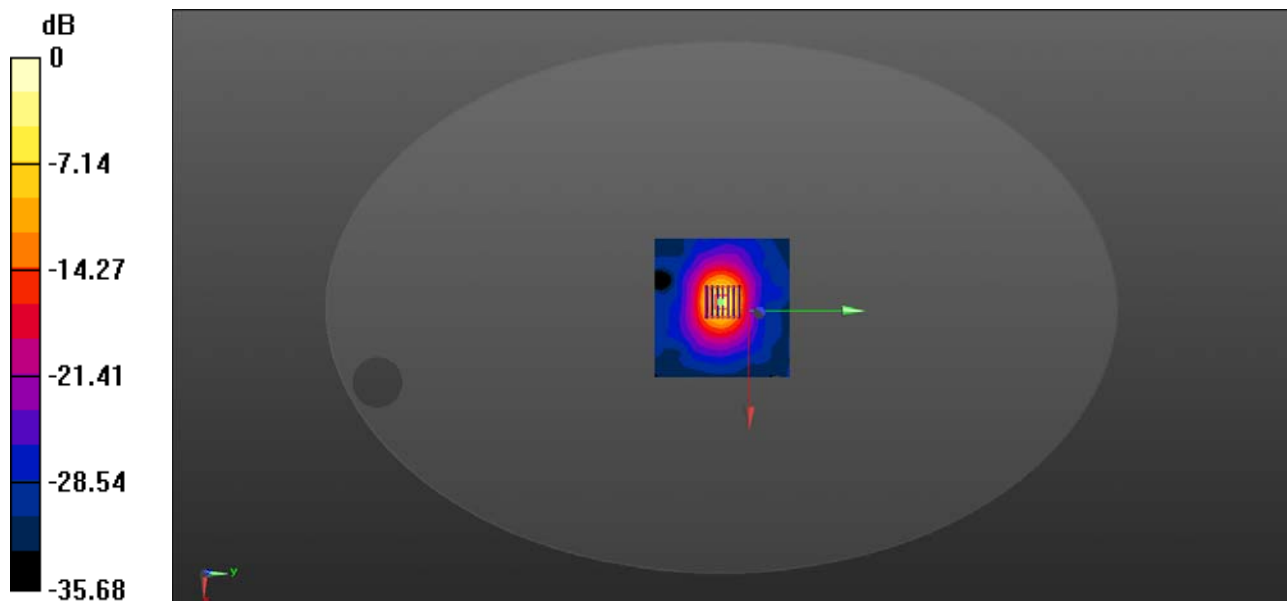

0 dB = 16.5 W/kg

System Performance Check Data (5800MHz Head)

Date: 2020.08.10

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.365$ S/m; $\epsilon_r = 34.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.83, 4.83, 4.83); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 5800 Head 100mw /Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.17 W/kg


CW 5800 Head 100mw /Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 33.18 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 30.5 W/kg

SAR(1 g) = 7.42 W/kg; SAR(10 g) = 2.04 W/kg

Maximum value of SAR (measured) = 15.4 W/kg

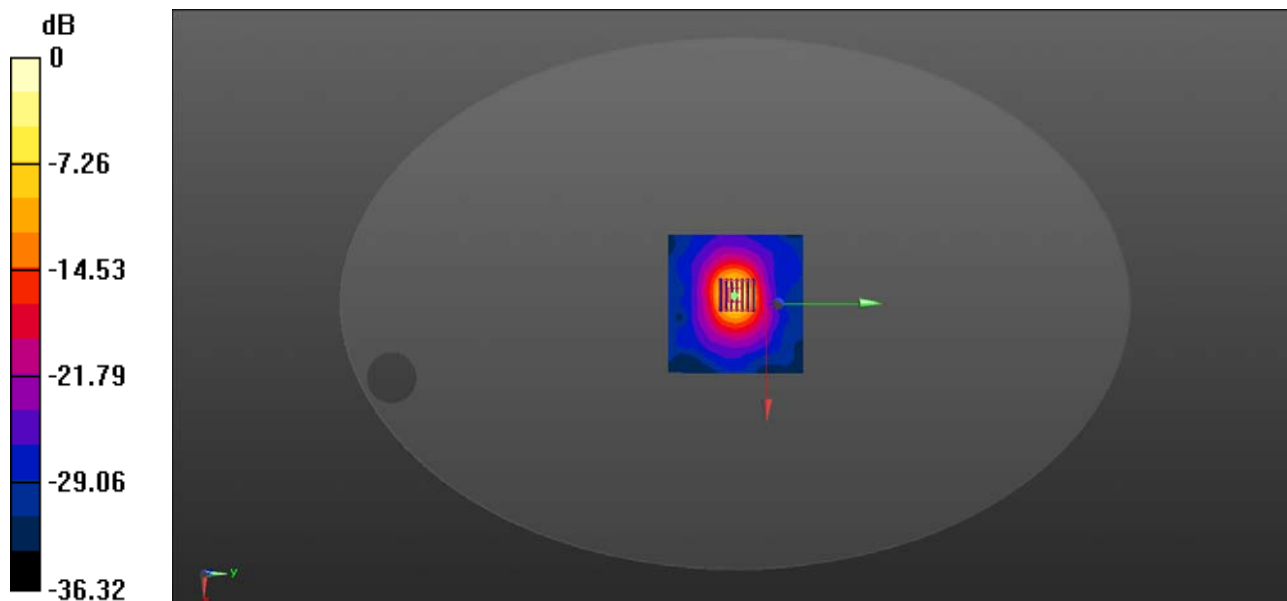

0 dB = 15.4 W/kg

System Performance Check Data (2450MHz Head)

Date: 2020.09.01

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.838$ S/m; $\epsilon_r = 39.434$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.55, 7.55, 7.55); Calibrated: 2020.07.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW2450 Head 100mw /Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.72 W/kg


CW2450 Head 100mw /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.14 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 14.4 W/kg

SAR(1 g) = 5.52 W/kg; SAR(10 g) = 2.48 W/kg

Maximum value of SAR (measured) = 6.53 W/kg

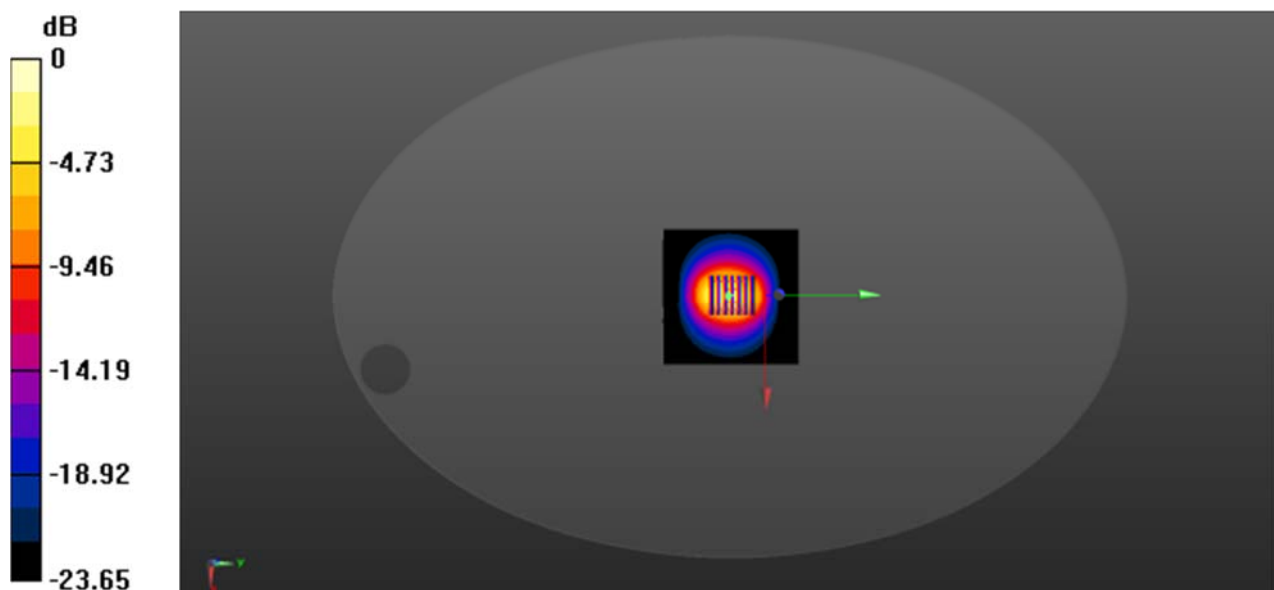

0 dB = 6.53 W/kg

System Performance Check Data (5300MHz Head)

Date: 2020.09.01

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.817$ S/m; $\epsilon_r = 35.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.43, 5.43, 5.43); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW5300 Head 100mw /Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.16 W/kg


CW5300 Head 100mw /Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 34.29 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 7.68 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 15.9 W/kg

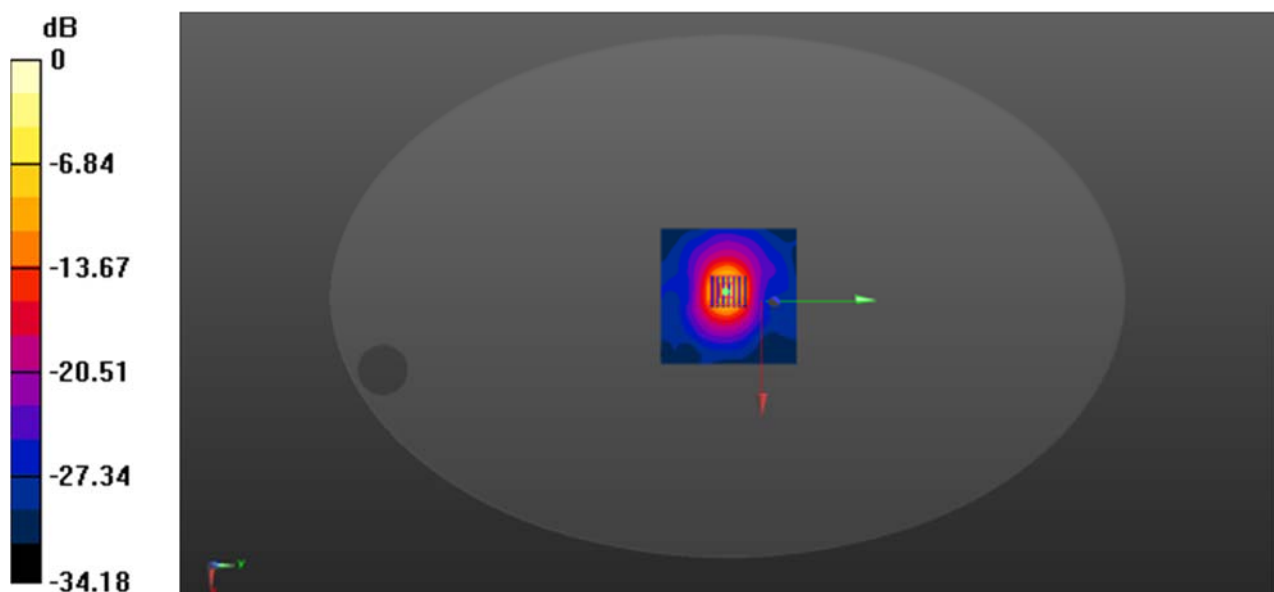

0 dB = 15.9 W/kg

ANNEX C TEST DATA

MEAS.1 Body Plane with Bottom Edge 0mm on Low Channel in Bluetooth DH5 mode with Antenna Auxiliary

Date: 2020.08.15

Communication System Band: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.3

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.733$ S/m; $\epsilon_r = 40.114$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.55, 7.55, 7.55); Calibrated: 2020.07.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch0/Area Scan (61x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.275 W/kg


Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.985 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.505 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.252 W/kg

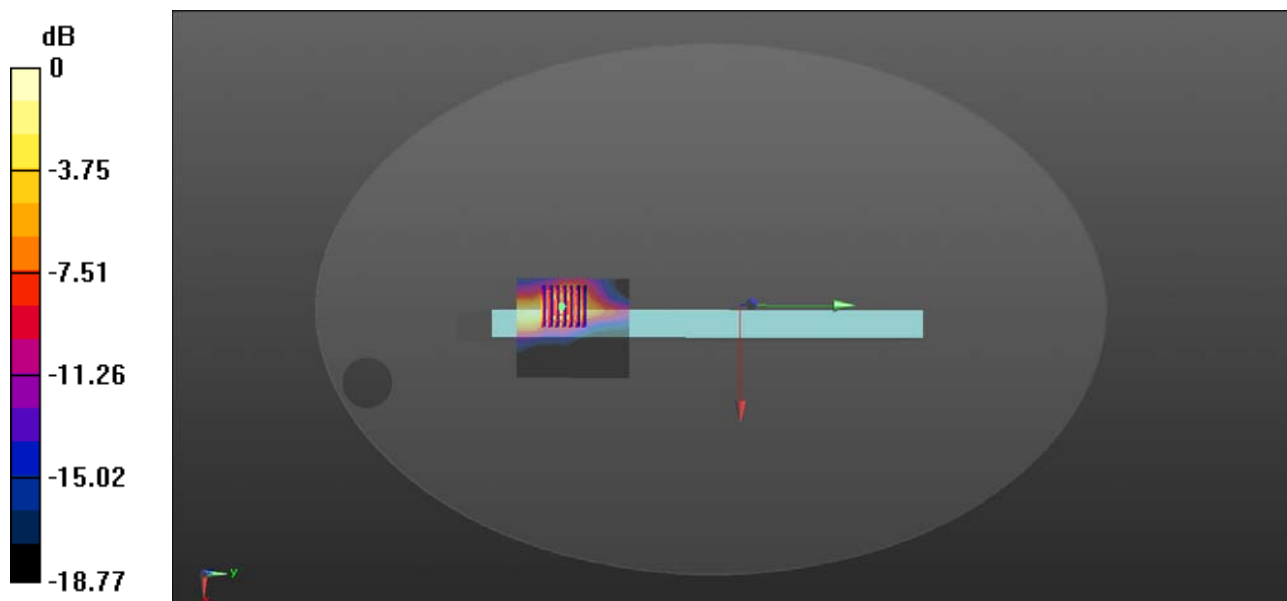

0 dB = 0.252 W/kg

MEAS.2 Body Plane with Bottom Edge 0mm on Middle Channel in IEEE802.11b mode with Antenna Main

Date: 2020.08.15

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.632$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.55, 7.55, 7.55); Calibrated: 2020.07.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (61x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.29 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8290 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.411 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

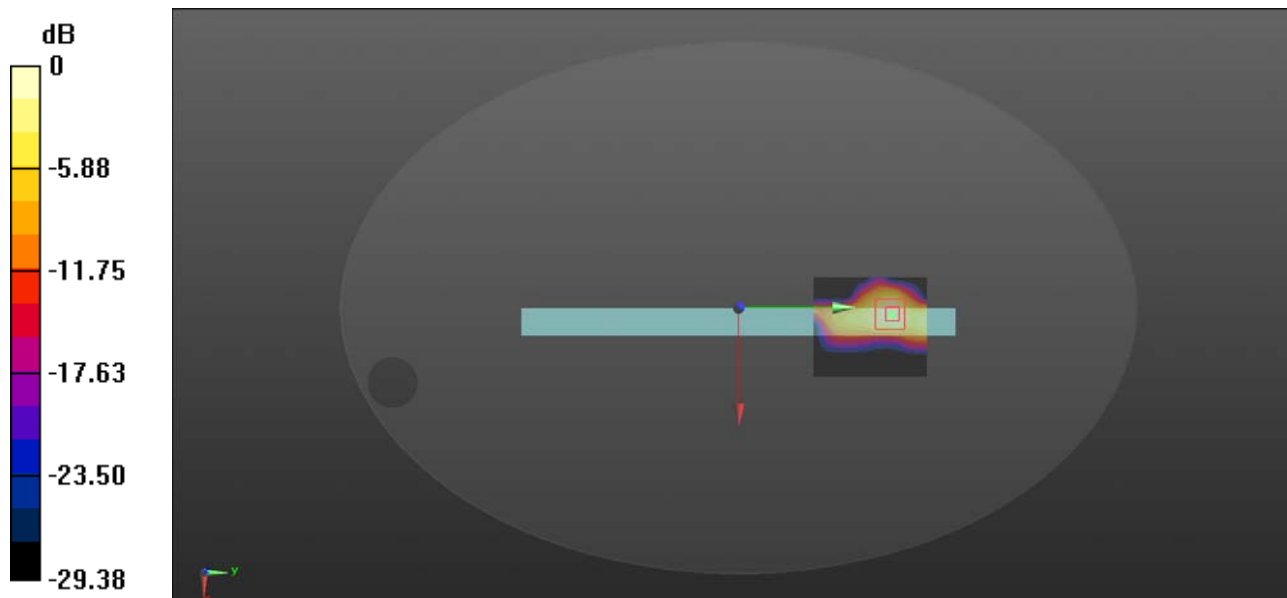

0 dB = 1.23 W/kg

MEAS.3 Body Plane with Bottom Edge 0mm on Low Channel in IEEE802.11b mode with Antenna Auxiliary

Date: 2020.08.15

Communication System Band: WLAN(b); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.752$ S/m; $\epsilon_r = 39.982$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.55, 7.55, 7.55); Calibrated: 2020.07.06;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1/Area Scan (61x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.904 W/kg


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.631 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.811 W/kg

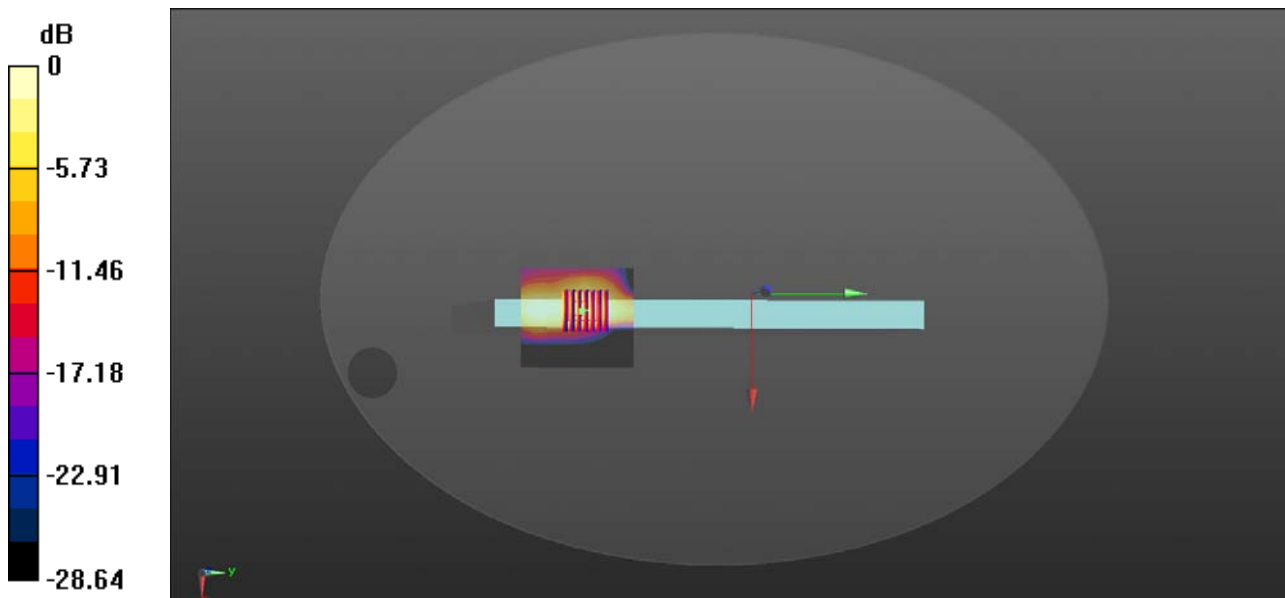

0 dB = 0.811 W/kg

MEAS.4 Body Plane with Bottom Edge 0mm on Channel 58 in IEEE802.11ac(VHT80) mode with Antenna Main

Date: 2020.08.08

Communication System Band: WLAN(ac)80MHz; Frequency: 5290 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.768$ S/m; $\epsilon_r = 35.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5 Liquid Temperature:21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.43, 5.43, 5.43); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch58/Area Scan (81x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.76 W/kg


Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.57 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 4.10 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.553 W/kg

Maximum value of SAR (measured) = 1.91 W/kg

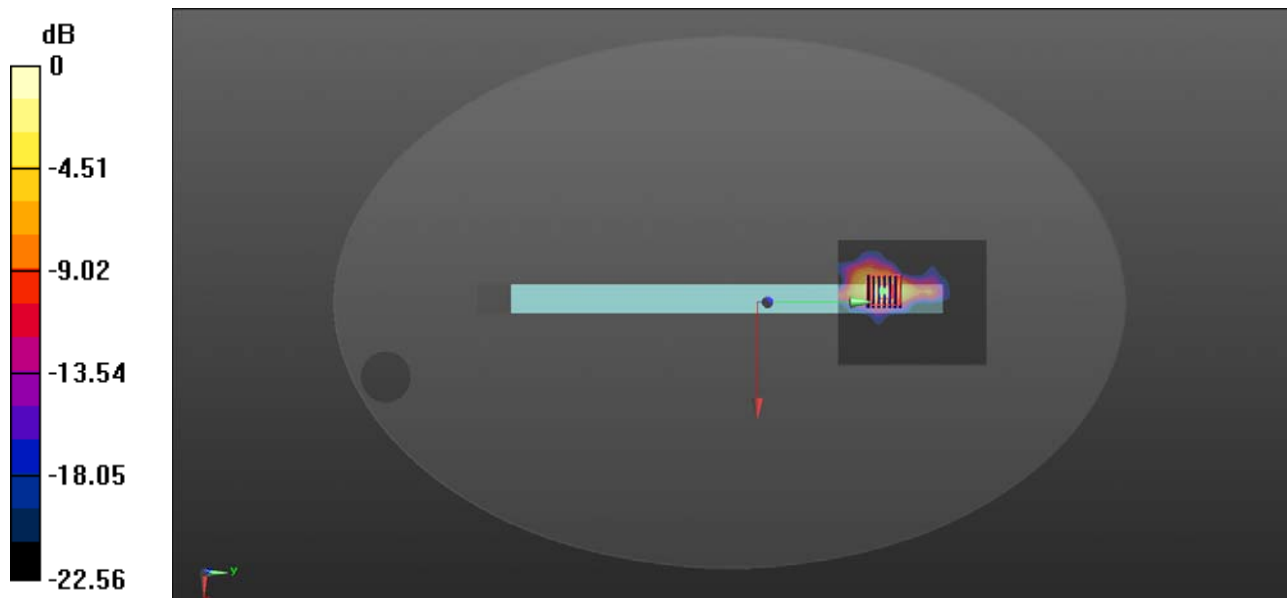

0 dB = 1.91 W/kg

MEAS.5 Body Plane with Bottom Edge 0mm on Channel 58 in IEEE802.11ac(VHT80) mode with Antenna Auxiliary

Date: 2020.08.08

Communication System Band: WLAN(ac)80MHz; Frequency: 5290 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.768$ S/m; $\epsilon_r = 35.951$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5 Liquid Temperature:21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.43, 5.43, 5.43); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch58/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.57 W/kg


Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.374 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

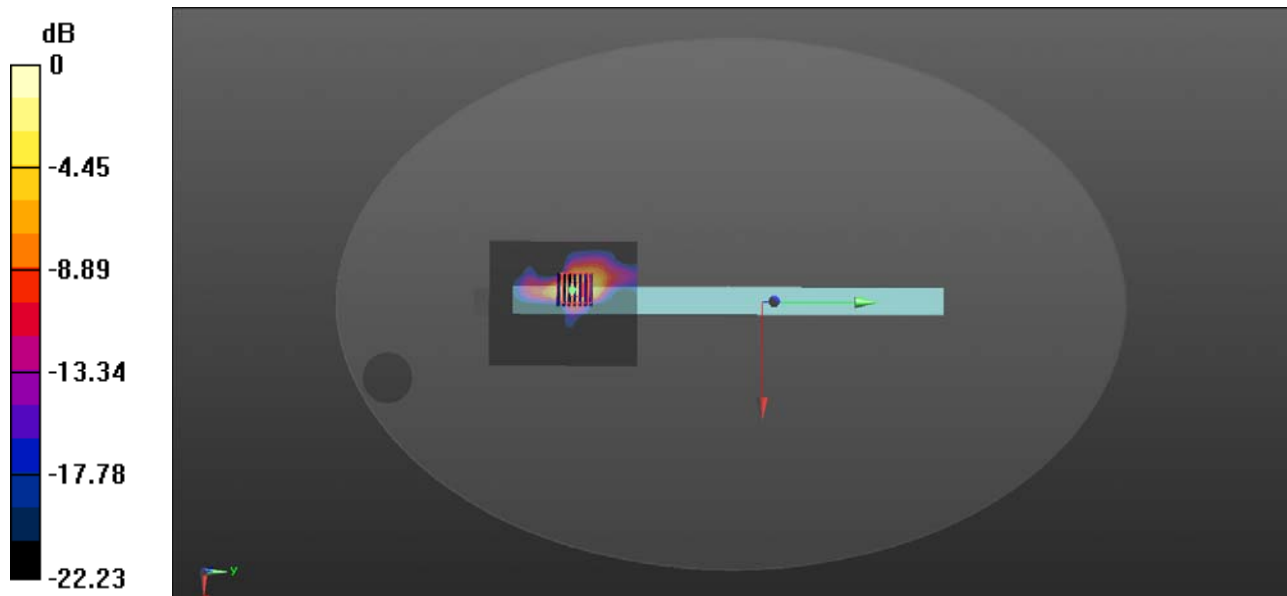

0 dB = 1.70 W/kg

MEAS.6 Body Plane with Bottom Edge 0mm on Channel 106 in IEEE802.11ac(VHT80) mode with Antenna Main

Date: 2020.08.09

Communication System Band: WLAN(ac)80MHz; Frequency: 5530 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.092$ S/m; $\epsilon_r = 36.193$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3 Liquid Temperature:21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.8, 4.8, 4.8); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch106/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.89 W/kg


Ch106/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.5610 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 4.11 W/kg

SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.283 W/kg

Maximum value of SAR (measured) = 2.09 W/kg

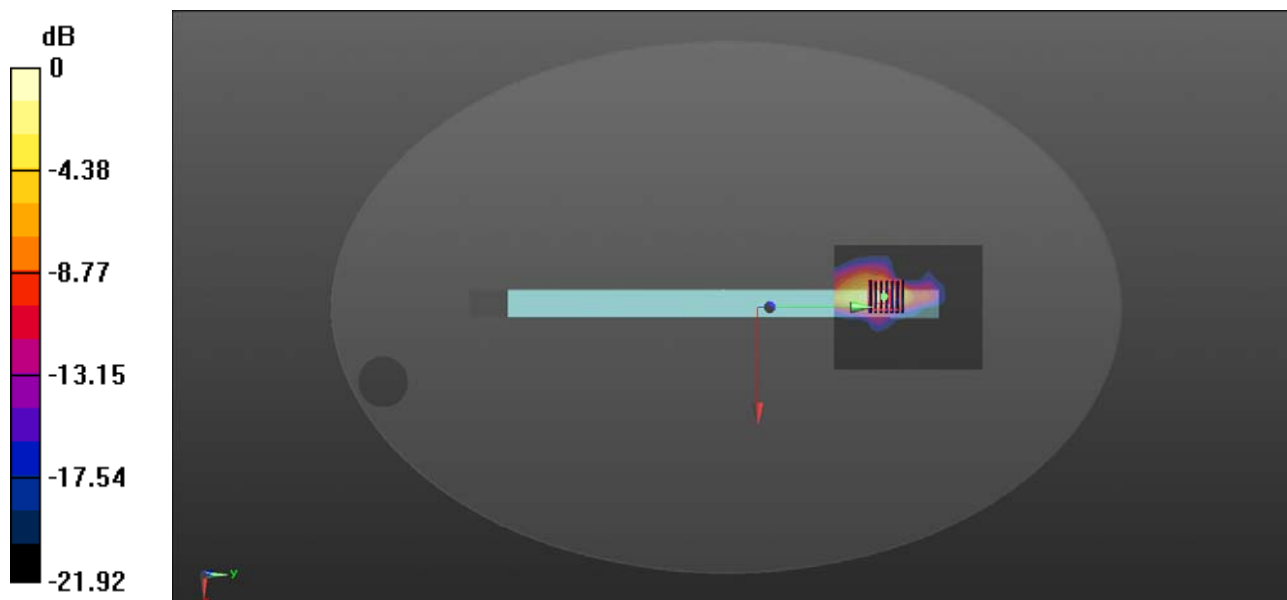

0 dB = 2.09 W/kg

MEAS.7 Body Plane with Bottom Edge 0mm on Channel 138 in IEEE802.11ac(VHT80) mode with Antenna Auxiliary

Date: 2020.08.09

Communication System Band: WLAN(ac)80MHz; Frequency: 5690 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.284$ S/m; $\epsilon_r = 35.114$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3 Liquid Temperature:21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.8, 4.8, 4.8); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch138/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.04 W/kg


Ch138/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.023 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 0.842 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

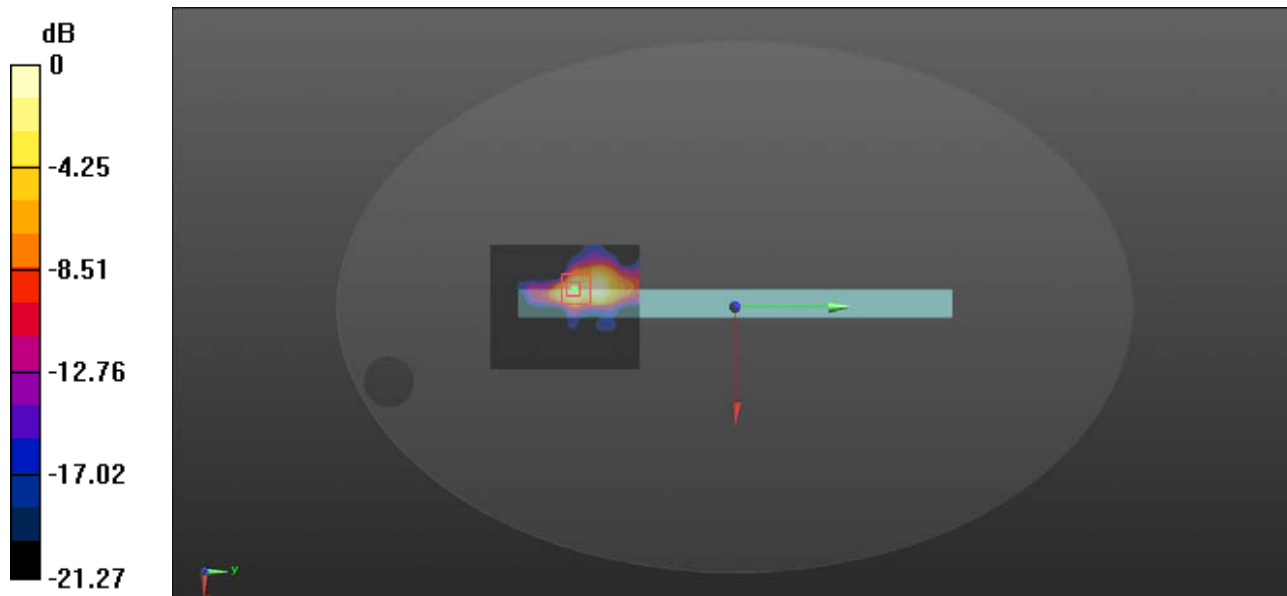

0 dB = 1.87 W/kg

MEAS.8 Body Plane with Bottom Edge 0mm on Channel 155 in IEEE802.11ac(VHT80) mode with Antenna Main

Date: 2020.08.10

Communication System Band: WLAN(ac)80MHz; Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.291$ S/m; $\epsilon_r = 35.777$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4 Liquid Temperature:21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.83, 4.83, 4.83); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch155/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.10 W/kg


Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.3470 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 4.38 W/kg

SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 2.08 W/kg

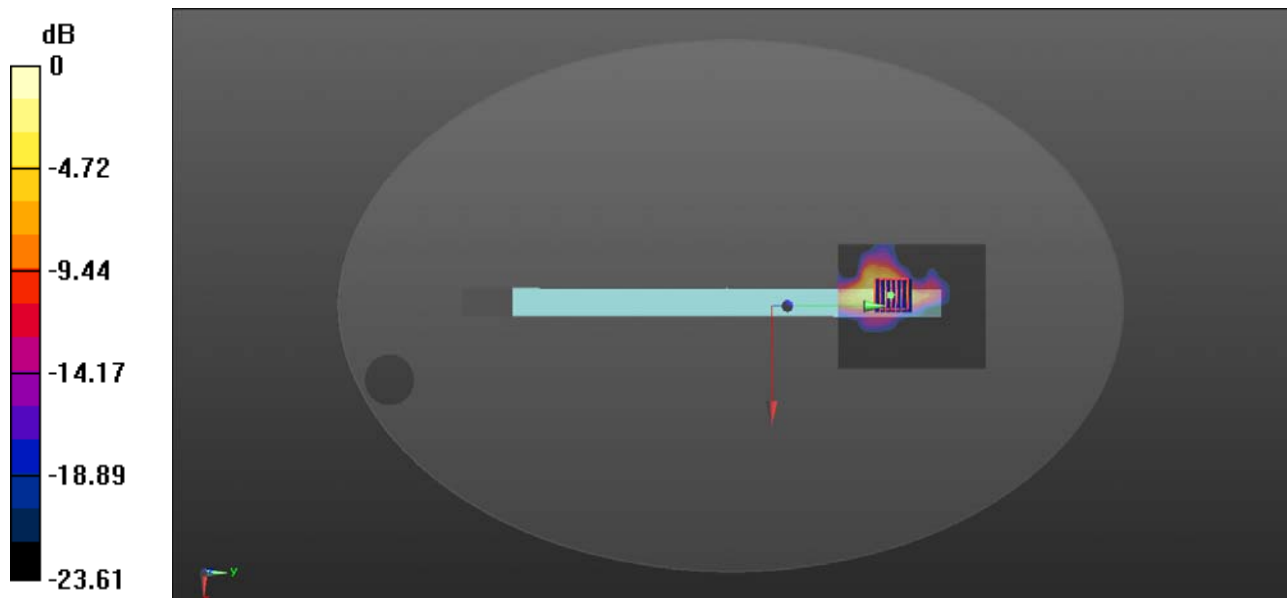

0 dB = 2.08 W/kg

MEAS.9 Body Plane with Bottom Edge 0mm on Channel 155 in IEEE802.11ac(VHT80) mode with Antenna Auxiliary

Date: 2020.08.10

Communication System Band: WLAN(ac)80MHz; Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.291$ S/m; $\epsilon_r = 35.777$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4 Liquid Temperature:21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.83, 4.83, 4.83); Calibrated: 2020.07.06;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn360; Calibrated: 2019.10.16
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch155/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.80 W/kg


Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.5940 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 0.767 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 1.63 W/kg

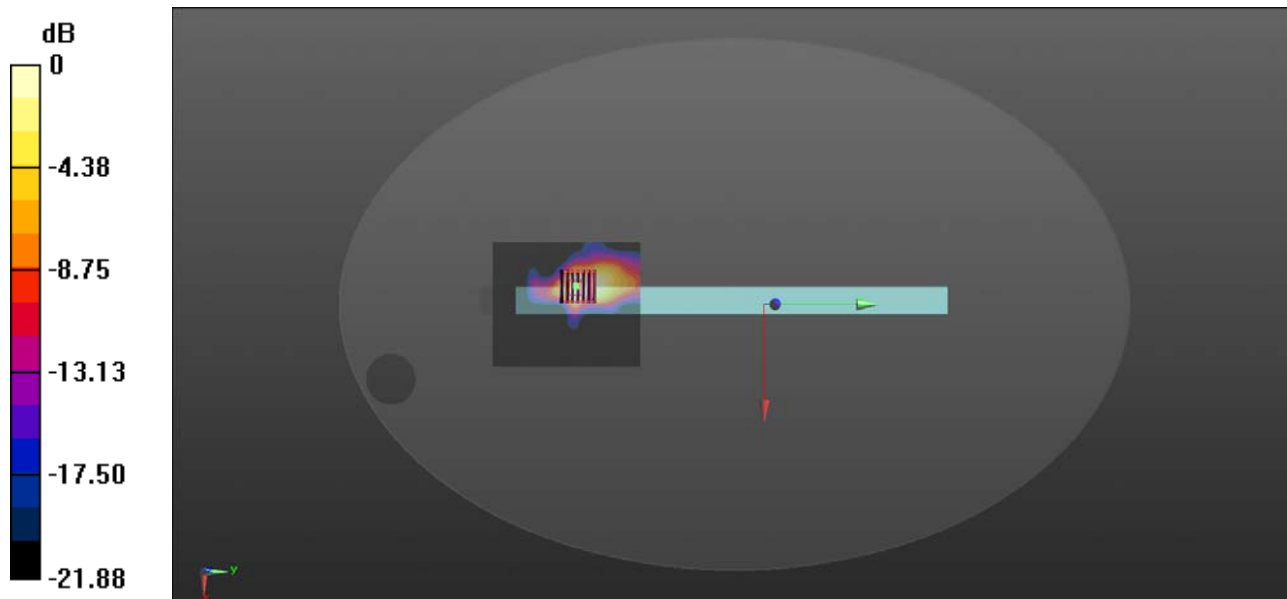

0 dB = 1.63 W/kg

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ2070564-AW.pdf".

ANNEX E SAR TEST SETUP PHOTOS

Please refer the document "BL-SZ2070564-AS.pdf".

ANNEX F CALIBRATION REPORT

Please refer the document "CALIBRATION REPORT.pdf".

--END OF REPORT--