

FCC SAR Test Report

Project No. : 2112C082
Equipment : 802.11a/b/g/n/ac RTL8822CE Combo module
Brand Name : Realtek
Test Model : RTL8822CE
Series Model : N/A
Date of Receipt : Dec. 13, 2021
Date of Test : Jan.10, 2022 ~ Jan.12, 2022
Issued Date : Jan. 21, 2022
Report Version : R00
Test Sample : Engineering Sample No.: DG2021121413
Standard(s) : Please refer to page 2.
Applicant : Realtek Semiconductor Corp.
Address : No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
Manufacturer : Realtek Semiconductor Corp.
Address : No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Justin Huang

Prepared by : Justin Huang

Herbert Liu

Approved by : Herbert Liu



TESTING CERT #5123.02

Add: No. 3 Jinshagang 1st Rd. Shixia, Dalang Town Dongguan City, Guangdong 523792 People's Republic of China

Tel: +86-769-8318-3000

Web: www.newbtl.com

Standard(s) : **ANSI Std C95.1-1992** Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz - 300 GHz. (IEEE Std C95.1-1991)

IEEE Std 1528-2013 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

KDB616217 D04 SAR for laptop and tablets v01r02
KDB447498 D04 Interim General RF Exposure Guidance v01
KDB248227 D01 802.11 Wi-Fi SAR v02r02
KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02 SAR Reporting v01r02
KDB690783 D01 SAR Listings on Grants v01r03

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . GENERAL INFORMATION	7
1.1 STATEMENT OF COMPLIANCE	7
1.2 LABORATORY ENVIRONMENT	7
1.3 GENERAL DESCRIPTION OF EUT	8
1.4 MAIN TEST INSTRUMENTS	10
2 . RF EMISSIONS MEASUREMENT	11
2.1 TEST FACILITY	11
2.2 MEASUREMENT UNCERTAINTY	11
3 . SAR MEASUREMENTS SYSTEM CONFIGURATION	12
3.1 SAR MEASUREMENT SET-UP	12
3.1.1 TEST SETUP LAYOUT	12
3.2 DASY5 E-FIELD PROBE SYSTEM	13
3.2.1 PROBE SPECIFICATION	13
3.2.2 E-FIELD PROBE CALIBRATION	14
3.2.3 OTHER TEST EQUIPMENT	15
3.2.4 SCANNING PROCEDURE	16
3.2.5 SPATIAL PEAK SAR EVALUATION	17
3.2.6 DATA STORAGE AND EVALUATION	18
3.2.7 DATA EVALUATION BY SEMCAD	19
4 . SYSTEM VERIFICATION PROCEDURE	21
4.1 TISSUE VERIFICATION	21
4.2 SYSTEM CHECK	22
4.3 SYSTEM CHECK PROCEDURE	22
5 . SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	23
5.1 SAR MEASUREMENT VARIABILITY	23
6 . OPERATIONAL CONDITIONS DURING TEST	24
6.1 SAR TEST CONFIGURATION	24
6.1.1 WIFI TEST CONFIGURATION	24
6.2 TEST POSITION	27
6.2.1 NOTEBOOK MODE	27
6.2.2 TABLET MODE	27
7 . TEST RESULT	29
7.1 CONDUCTED POWER RESULTS	29
7.1.1 CONDUCTED POWER MEASUREMENTS OF BT	29

Table of Contents	Page
7.1.2 CONDUCTED POWER MEASUREMENTS OF WIFI	30
7.2 SAR TEST RESULTS	50
7.2.1 SAR MEASUREMENT RESULT	51
7.3 MULTIPLE TRANSMITTER EVALUATION	56
7.3.1 STAND-ALONE SAR TEST EXCLUSION	56
7.3.2 SIMULTANEOUS TRANSMISSION CONDITIONS	57
7.3.3 SIMULTANEOUS TRANSMISSION CONCLUSION	58
APPENDIX	62
1. TEST LAYOUT	62
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate	
Appendix D. Photographs of the Test Set-Up	

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Jan. 21, 2022

1. GENERAL INFORMATION

1.1 STATEMENT OF COMPLIANCE

Mode	Highest Reported Body SAR-1g (W/kg)	
	Notebook Mode	Tablet Mode
2.4G WLAN	0.519	0.939
5.2G WLAN	0.565	1.032
5.3G WLAN	0.857	1.226
5.6G WLAN	0.708	0.982
5.8G WLAN	0.377	0.764
Bluetooth	0.393	0.407

Note: The device is in compliance with Specific Absorption Rate (SAR) for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

1.2 LABORATORY ENVIRONMENT

Temperature	Min. = 20°C, Max. = 24°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

1.3 GENERAL DESCRIPTION OF EUT

Equipment	802.11a/b/g/n/ac RTL8822CE Combo module					
Test Model	RTL8822CE					
Series Model	N/A					
Model Difference(s)	N/A					
Modulation	WiFi(DSSS/OFDM), BT(GFSK/π/4-DQPSK/8-DPSK)					
Operation Frequency Range(s)	Band	TX (MHz)		RX (MHz)		
	Bluetooth	2400~2483.5				
	WIFI	2400~2483.5				
		5150~5250				
		5250~5350				
		5470~5725				
		5725~5850				
Test Channels (low-mid-high)	0-39-78 (BT)					
	0-19-39 (BLE)					
	1-6-11-12-13 (2.4G WIFI 802.11b/g/n HT20/ac VHT20)					
	3-6-9-10-11 (2.4G WIFI 802.11n HT40/ac VHT40)					
	5G WIFI	5.2G	5.3G	5.6G	5.8G	
	802.11a/n HT20/ ac VHT20	36-40-44-48	52-56-60-64	100-104-108- 112-116-132- 136-140-144	149-153-157- 161-165	
	802.11n HT40/ ac VHT40	38-46	54-62	102-110-118- 126-134-142	151-159	
	802.11ac VHT80	42	58	106-122-138	155	
Antenna Information	Ant.	Brand	Model	Type	Frequency Range (MHz)	Gain (dBi)
	Main Ant	ZhongTianXun (ZTX)	2.00005187	PIFA Antenna	2400-2500	1.58
					5150-5350	3.27
					5470-5725	3.34
					5725-5875	3.49
	Aux Ant	ZhongTianXun (ZTX)	2.00005184	PIFA Antenna	2400-2500	1.29
					5150-5350	2.39
					5470-5725	3.58
					5725-5875	3.97
	Main Ant	Shenzhen South Star Technology Co., LTD (NDX)	N12-8011-R0A	PIFA Antenna	2400-2500	1.04
					5150-5350	0.60
					5470-5725	0.83
					5725-5875	0.53
	Aux Ant	Shenzhen South Star Technology Co., LTD (NDX)	N12-8012-R0A	PIFA Antenna	2400-2500	1.13
					5150-5350	1.82
					5470-5725	2.29
5725-5875					1.58	

Other Information		
Battery Information	Band / Model	1# Band / Model: sunwoda / L20D3PG0 2# Band / Model: LGES / L20L3PG0 3# Band / Model: Celxpert / L20C3PG0 4# Band / Model: Simplo / L20M3PG0 5# Band / Model: Simplo / L20M3PG3
	Power Rating	11.52V  Typical Capacity: 4080mAh/47Wh, Rated Capacity: 3994mAh/46Wh

Note:

1) Implementation in the following platform

Model name: IP Flex 3 Chrome 15IJL7, IP Flex 3 Chrome 15IJL7xxxxxx

(The"x" in the model name can be 0 to 9, A to Z, a to z , "-" or blank, it represents different sales customer code, all models only name difference)

Product name: Notebook Computer

Brand name: Lenovo

2) Because all batteries with the same rated capacity, we estimate that the impact of replacing the battery on SAR is small. We choose one of the batteries for testing.

1.4 MAIN TEST INSTRUMENTS

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	760	Oct. 26, 2021	1 Year
2	E-field Probe	Speag	EX3DV4	3809	Oct. 14, 2021	1 Year
3	System Validation Dipole	Speag	D2450V2	919	May 28, 2021	3 Years
4	System Validation Dipole	Speag	D5GHzV2	1160	May 27, 2021	3 Years
5	ELI Phantom	Speag	ELI Phantom V5.0	1222	N/A	N/A
6	ELI Phantom	Speag	ELI Phantom V5.0	1128	N/A	N/A
7	Power Amplifier	Mini-Circuits	ZHL-42W+	QA1333003	Dec. 26, 2021	1 Year
8	Power Amplifier	Mini-Circuits	ZVE-8G+	520701341	Mar. 02, 2021	1 Year
9	DC Source meter	Iteck	IT6154	0061041267682 01001	Jul. 24, 2021	1 Year
10	Signal Analyzer	R&S	FSV7	103120	Jul. 10, 2021	1 Year
11	Vector Network Analyzer	Agilent	E5071C	MY46102965	Feb. 28, 2021	1 Year
12	Signal Generator	Agilent	N5172B	MY53050758	Feb. 27, 2021	1 Year
13	Smart Power Sensor	R&S	NRP-Z21	102209	Feb. 28, 2021	1 Year
14	3.5mm Economy Calibration Kit	Agilent	85052D	MY43252246	Dec. 14, 2021	1 Year
15	Dielectric Assessment Kit	Speag	DAK-3.5	1226	N/A	N/A
16	Directional Coupler	Woken	TS-PCC0M-05	0107090019	Feb. 27, 2021	1 Year
17	Coupler	Woken	0110A05601O-10	COM5BNW1A2	Feb. 27, 2021	1 Year
18	Digital Thermometer	TES	TES-1310	210706071	Dec. 07, 2021	1 Year

Note:

1. "N/A" denotes no model name, serial No. or calibration specified.

2.

1) Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- There is no physical damage on the dipole;
- System check with specific dipole is within 10% of calibrated value;
- The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement;
- The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a short block performed before measuring liquid parameters.

2. RF EMISSIONS MEASUREMENT

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is SAR room at the location of Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.
BTL's Designation Number for FCC: CN1240.

2.2 MEASUREMENT UNCERTAINTY

Note: Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.


3. SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1 SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

3.1.1 TEST SETUP LAYOUT

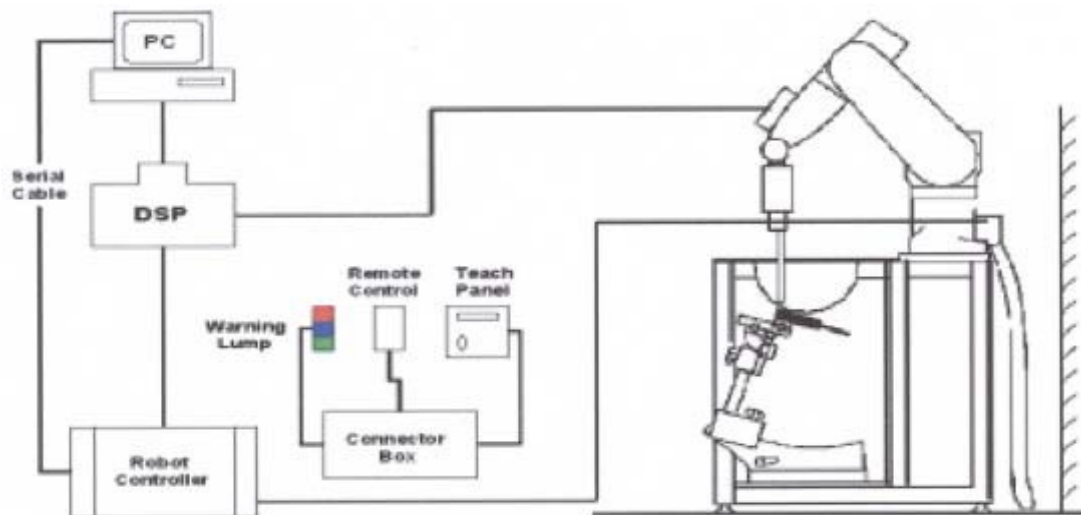

3.2 DASY5 E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1 PROBE SPECIFICATION

EX3DV4

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm



E-field Probe

3.2.2 E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermostat-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt =Exposure time (30 seconds),

C =Heat capacity of tissue (brain or muscle),

ΔT =Temperature increase due to RF exposure.

Or
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where: σ = Simulated Tissue Conductivity,
 ρ =Tissue density (kg/m³).

3.2.3 OTHER TEST EQUIPMENT

3.2.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is light weight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

3.2.3.2 Phantom

Model	ELI Phantom	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Shell Thickness	2±0.1 mm	
Filling Volume	Approx. 30 liters	
Dimensions	Length: 600 mm; Width: 190mm Height: adjustable feet	
Available	Special	

3.2.4 SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

● Area Scan

The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

● Zoom Scan

A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} \leq 8\text{mm}$, 2-4GHz $\leq 5\text{mm}$ and 4-6 GHz $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} \leq 5\text{mm}$, 3-4 GHz $\leq 4\text{mm}$ and 4-6GHz $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{Zoom}}(n)$	$\Delta z_{\text{Zoom}}(1)^*$	$\Delta z_{\text{Zoom}}(n>1)^*$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 25\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5^* \Delta z_{\text{Zoom}}(n-1)$	$\geq 22\text{mm}$

3.2.5 SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution) or 8 x 8 x 7 points (with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computer mathematic, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computer mathematic, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

3.2.6 DATA STORAGE AND EVALUATION

3.2.6.1 Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.2.7 DATA EVALUATION BY SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, ai0, ai1, ai2
	Conversion factor	ConvFi
	Diode compression point	Dcpj
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multi meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	V_i = compensated signal of channel i	(i = x, y, z)
	U_i = input signal of channel i	(i = x, y, z)
	cf = crest factor of exciting field	(DASY parameter)
	dcp _i = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With V_i = compensated signal of channel i (i = x, y, z)

Norm_i = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_X^2 + E_Y^2 + E_Z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m
= conductivity in [mho/m] or [Siemens/m]
= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total field strength in V/m

H_{tot} = total magnetic field strength in A/m

4. SYSTEM VERIFICATION PROCEDURE

4.1 TISSUE VERIFICATION

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Head 2450	-	45.0	-	0.1	-	-	54.9	-
Head 5G	-	-	-	-	-	17.2	65.5	17.3

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Verification									
Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Targeted Conductivity (σ)	Targeted Permittivity (ϵ_r)	Deviation Conductivity (σ) (%)	Deviation Permittivity (ϵ_r) (%)	Date
Head	2450	23.4	1.795	39.754	1.80	39.2	-0.28	1.41	Jan. 12, 2022
Head	5250	23.3	4.809	35.690	4.71	36.0	2.10	-0.72	Jan. 10, 2022
Head	5600	23.3	5.196	34.810	5.07	35.5	2.49	-1.94	Jan. 10, 2022
Head	5750	23.5	5.378	35.762	5.22	35.4	2.97	-2.44	Jan. 11, 2022

Note:

- 1)The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2)KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3)The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 SYSTEM CHECK

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.


System Check	Date	Frequency (MHz)	Targeted SAR 1g (W/kg)	Measured SAR 1g (W/kg)	normalized SAR 1g (W/kg)	Deviation (%)	Dipole S/N
Head	Jan. 12, 2022	2450	52.10	12.90	51.60	-0.96	919
Head	Jan. 10, 2022	5250	78.00	7.97	79.70	2.18	1160
Head	Jan. 10, 2022	5600	80.60	8.10	81.00	0.50	1160
Head	Jan. 11, 2022	5750	76.50	7.87	78.70	2.88	1160

4.3 SYSTEM CHECK PROCEDURE

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250mW (below 3GHz) or 100mW (3-6GHz). To adjust this power a power meter is used.

The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system ($\pm 10\%$).

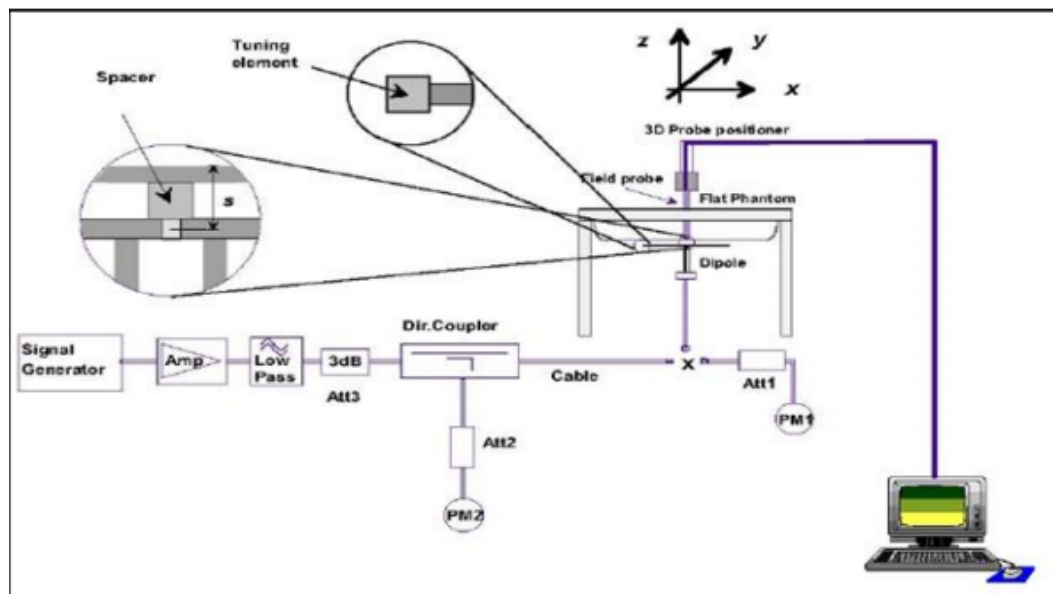

5. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

5.1 SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.


6. OPERATIONAL CONDITIONS DURING TEST

6.1 SAR TEST CONFIGURATION

6.1.1 WIFI TEST CONFIGURATION

For WLAN / BT SAR testing, WLAN / BT engineering testing software installed on the DUT can provide continuous transmitting RF signal.

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227 D01 are applied.

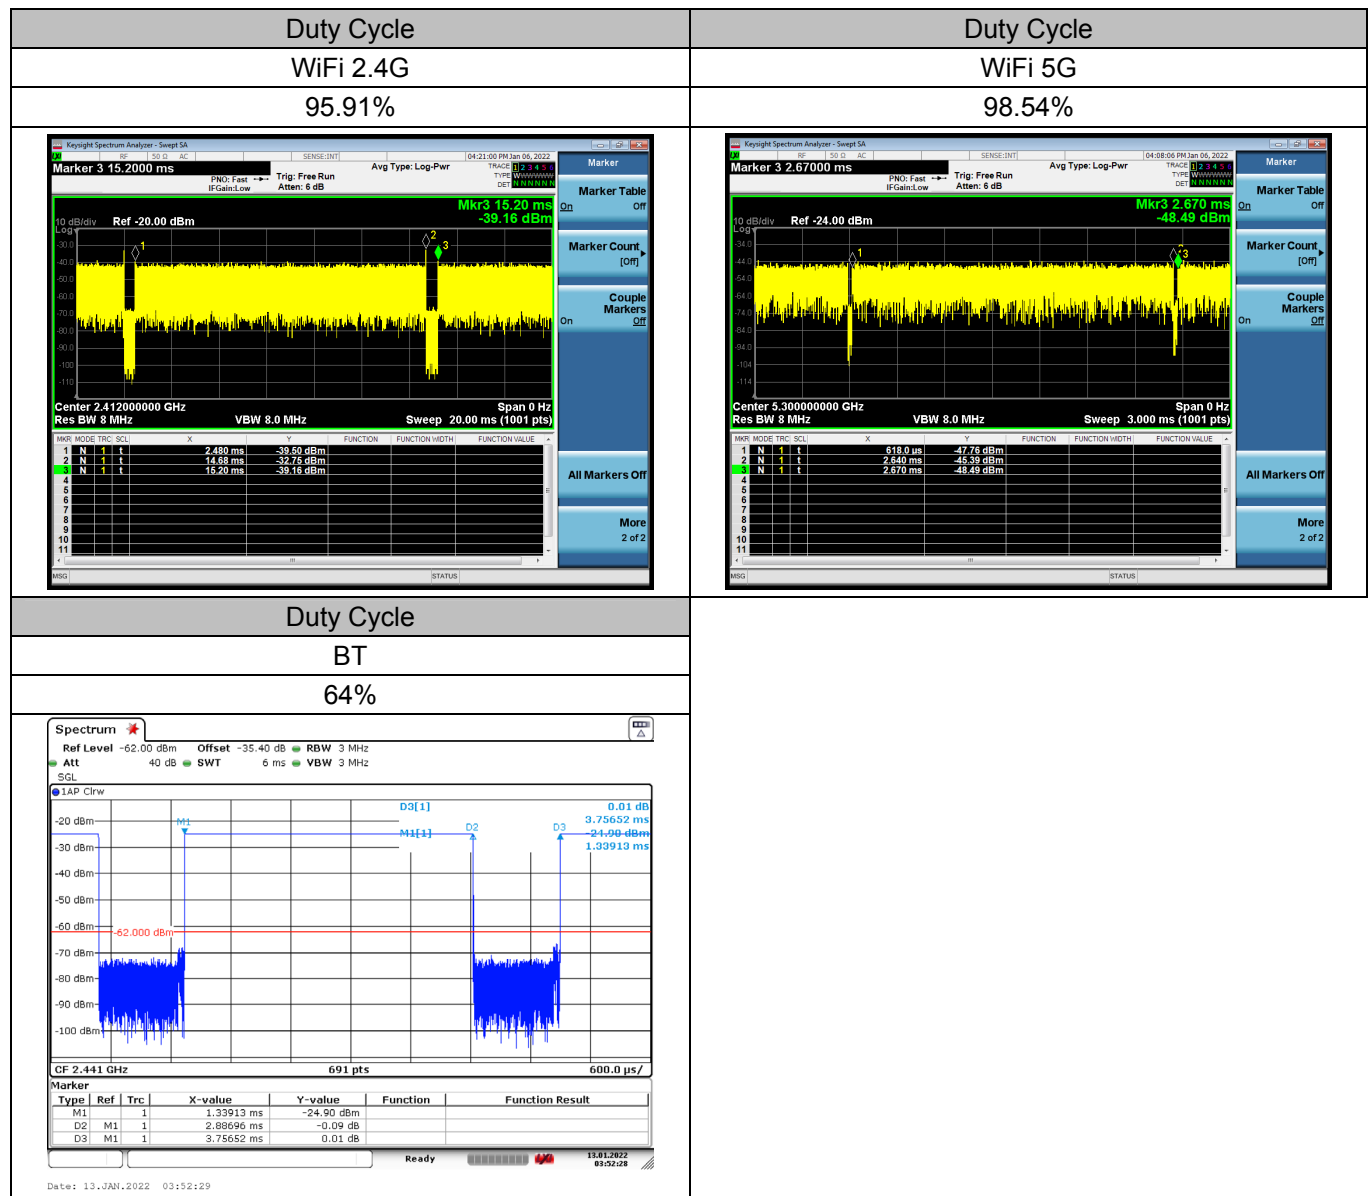

6.1.1.1 2.4G SAR Test Requirements

802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

SAR Test Requirements for OFDM configurations

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, each stand alone. And frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

6.1.1.2 5G SAR Test Requirements

✧ U-NII-1 and U-NII-2A Band

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

✧ U-NII-2C, U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, they must be considered for SAR testing. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels.¹¹ When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

6.1.1.3 OFDM transmission mode and SAR test channel selection

For the 2.4GHz and 5GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations (for example 802.11a, 802.11n and 802.11ac, or 802.11g and 802.11n, with the same channel bandwidth, modulation, and data rate, etc.), the lower order 802.11 mode (i.e. 802.11a then 802.11n and 802.11ac, or 802.11g then 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.


6.1.1.4 Initial test configuration procedure

For OFDM, in both 2.4G and 5GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output powers is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output power will be the initial test configuration. When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurement.

6.2 TEST POSITION

6.2.1 NOTEBOOK MODE

This DUT was tested in 2 different positions. They are back of keyboard and back of screen as illustrated below:

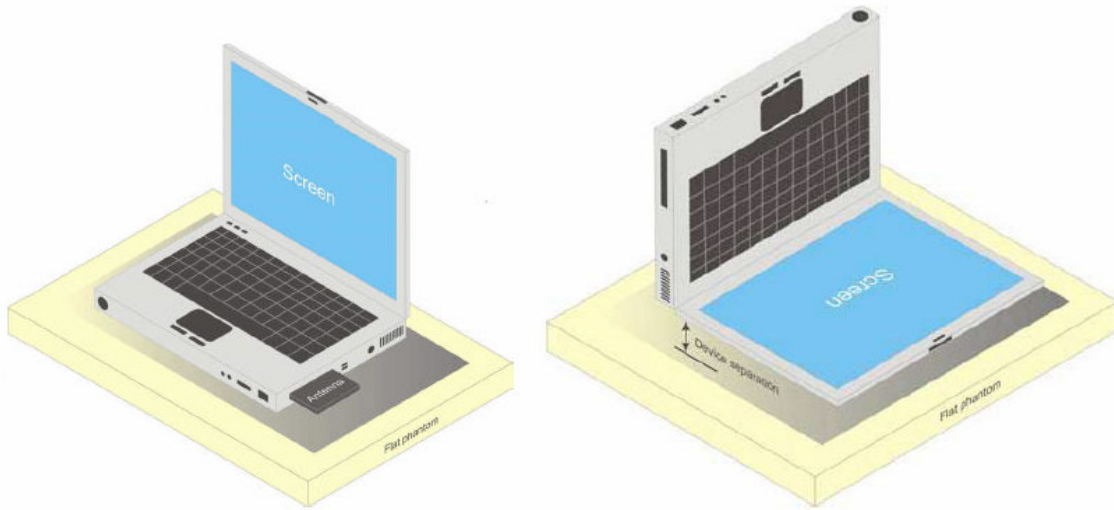


a) Portable computer with back of keyboard and back of screen.

6.2.2 TABLET MODE

The device does not have telephone receiver. Next to the ear operation is not supported. So the additional Head SAR testing for this device is not required.


Body-worn operating configurations should be tested with positioned against a flat phantom in normal use configurations. The distance between the device and the phantom was kept 5mm.

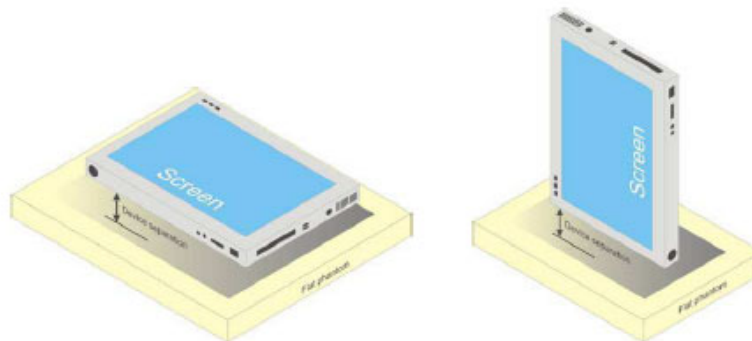


b) Tablet form factor portable computer

The location of the antenna for notebook mode is as below:

Notebook state:

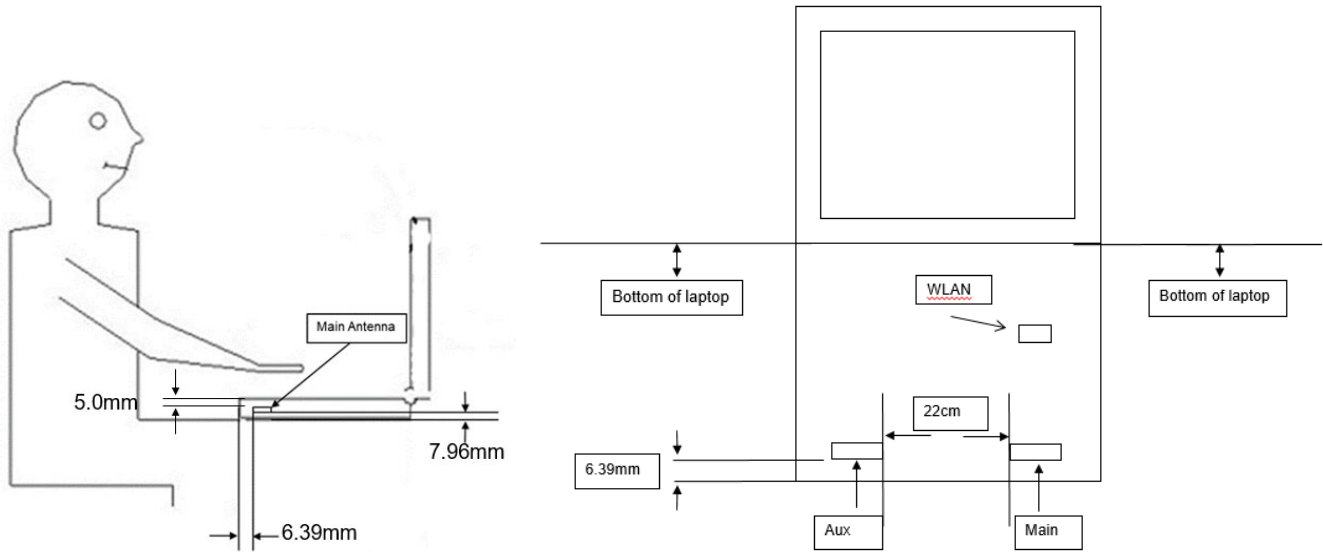

Tablet state:

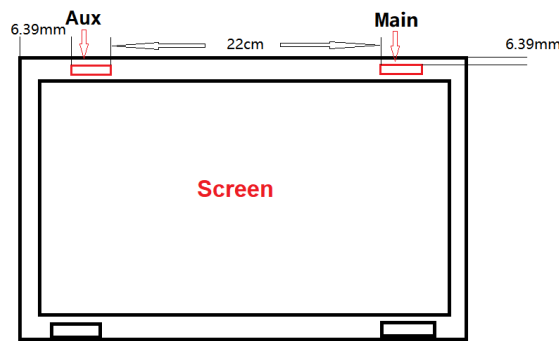

The SAR measurement positions of each band are as below:

For Notebook Mode

Antenna	Back of Keyboard	Back of Screen
Main Ant	Yes	Yes
Aux Ant	Yes	Yes

For Tablet Mode

Antenna	Front Face	Rear Face	Left Side	Right Side	Top Side	Bottom Side
Main Ant	No	Yes	Yes	Yes	Yes	No
Aux Ant	No	Yes	Yes	Yes	Yes	No

Note: According to the antenna location shown as above, particular DUT edges were not required to be evaluated for SAR if the antenna-to-edge distance is greater than 50mm.

7. TEST RESULT

7.1 CONDUCTED POWER RESULTS

7.1.1 CONDUCTED POWER MEASUREMENTS OF BT

BT	Average Conducted Power(dBm)			
	Max.	CH0	CH39	CH78
	Tune up	2402MHz	2441MHz	2480MHz
DH5	12.50	11.64	11.54	11.56
2DH5	12.50	11.59	11.51	11.45
3DH5	9.50	8.81	8.67	8.88

BT	Average Conducted Power(dBm)			
	Max.	CH0	CH19	CH39
	Tune up	2402MHz	2441MHz	2480MHz
BLE(1M)	6.50	5.82	6.10	5.98
BLE(2M)	6.50	5.77	6.00	6.02

Note:

- 1) The Average conducted power of Bluetooth is measured with RMS detector.
- 2) The tested channel results are marks in bold.

7.1.2 CONDUCTED POWER MEASUREMENTS OF WIFI

1. Conducted power measurements of 2.4G WiFi

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
2.4G WIFI _1TX _Main Ant	802.11b	1	2412	1	15.00	14.89
		6	2437		15.00	14.97
		11	2462		15.00	14.87
		12	2467		14.00	13.92
		13	2472		10.00	9.83
	802.11g	1	2412	6	14.00	13.72
		6	2437		15.00	14.83
		11	2462		14.00	13.83
		12	2467		11.00	10.91
		13	2472		8.00	7.52
	802.11ac VHT20	1	2412	MCS0	14.00	13.61
		6	2437		15.00	14.17
		11	2462		14.00	13.78
		12	2467		11.00	10.70
		13	2472		8.00	7.35
	802.11ac VHT40	3	2422	MCS0	13.00	12.75
		6	2437		15.00	14.20
		9	2452		14.00	13.82
		10	2457		11.00	10.74
		11	2462		7.00	6.89

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power (dBm)
2.4G WIFI _1TX _Aux Ant	802.11b	1	2412	1	15.00	14.39
		6	2437		15.00	14.62
		11	2462		15.00	14.45
		12	2467		14.00	13.59
		13	2472		10.00	9.33
	802.11g	1	2412	6	14.00	13.62
		6	2437		15.00	14.51
		11	2462		14.00	13.51
		12	2467		11.00	10.56
		13	2472		8.00	7.42
	802.11ac VHT20	1	2412	MCS0	14.00	13.46
		6	2437		15.00	14.38
		11	2462		14.00	13.61
		12	2467		11.00	10.66
		13	2472		8.00	7.76
	802.11ac VHT40	3	2422	MCS0	13.00	12.61
		6	2437		15.00	14.35
		9	2452		14.00	13.73
		10	2457		11.00	10.88
		11	2462		7.00	6.69

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT Main Average Power(dBm)	ANT Aux Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
2.4G WIFI _2TX _Main Ant + Aux Ant	802.11b	1	2412	1	14.89	14.37	18.00	17.65
		6	2437		14.97	14.30	18.00	17.66
		11	2462		14.87	14.21	18.00	17.56
		12	2467		13.92	13.59	17.00	16.77
		13	2472		9.83	9.33	13.00	12.60
	802.11g	1	2412	6	13.72	13.62	17.00	16.68
		6	2437		14.83	14.51	18.00	17.68
		11	2462		13.83	13.51	17.00	16.68
		12	2467		10.91	10.56	14.00	13.75
		13	2472		7.52	7.42	11.00	10.48
	802.11ac VHT20	1	2412	MCS8	13.61	13.46	17.00	16.55
		6	2437		14.17	14.38	18.00	17.29
		11	2462		13.78	13.61	17.00	16.71
		12	2467		10.70	10.66	14.00	13.69
		13	2472		7.35	7.76	11.00	10.57
	802.11ac VHT40	3	2422	MCS8	12.75	12.61	16.00	15.69
		6	2437		14.20	14.35	18.00	17.29
		9	2452		13.82	13.73	17.00	16.79
		10	2457		10.74	10.88	14.00	13.82
		11	2462		6.89	6.69	10.00	9.80

Note:

- 1) The Average conducted power of 2.4G WiFi is measured with RMS detector.
- 2) Per KDB248227 D01, for 2.4G WiFi, the highest measured maximum output power Channel for DSSS modes (802.11b) was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required When the highest reported SAR for DSSS is adjusted by the ratio of OFDM modes (802.11g/n) to DSSS modes (802.11b) specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- 3) The tested channel results are marks in bold.

2. Conducted power measurements of 5.2G WiFi

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.2G WIFI _1TX _Main Ant	802.11a	36	5180	6	13.00	12.51
		40	5200		13.00	12.62
		44	5220		13.00	12.57
		48	5240		13.00	12.47
	802.11n HT20	36	5180	MCS0	13.00	12.22
		40	5200		13.00	12.35
		44	5220		13.00	12.42
		48	5240		13.00	12.51
	802.11n HT40	38	5190	MCS0	13.00	12.40
		46	5230		13.00	12.54
	802.11ac VHT20	36	5180	MCS0	13.00	12.44
		40	5200		13.00	12.51
		44	5220		13.00	12.56
		48	5240		13.00	12.58
	802.11ac VHT40	38	5190	MCS0	13.00	12.32
		46	5230		13.00	12.20
	802.11ac VHT80	42	5210	MCS0	13.00	12.49

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.2G WIFI _1TX _Aux Ant	802.11a	36	5180	6	13.00	12.51
		40	5200		13.00	12.55
		44	5220		13.00	12.63
		48	5240		13.00	12.67
	802.11n HT20	36	5180	MCS0	13.00	12.50
		40	5200		13.00	12.62
		44	5220		13.00	12.53
		48	5240		13.00	12.62
	802.11n HT40	38	5190	MCS0	13.00	12.40
		46	5230		13.00	12.44
	802.11ac VHT20	36	5180	MCS0	13.00	12.32
		40	5200		13.00	12.37
		44	5220		13.00	12.42
		48	5240		13.00	12.47
	802.11ac VHT40	38	5190	MCS0	13.00	12.56
		46	5230		13.00	12.62
	802.11ac VHT80	42	5210	MCS0	13.00	12.64

Band	Mode	Channel	Frequency (MHz)	Data Rate Mbps)	ANT Main Average Power(dBm)	ANT Aux Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
5.2G WIFI _2TX _Main Ant + Aux Ant	802.11a	36	5180	6	12.47	12.51	16.00	15.50
		40	5200		12.50	12.55	16.00	15.54
		44	5220		12.52	12.63	16.00	15.59
		48	5240		12.47	12.66	16.00	15.58
	802.11n HT20	36	5180	MCS8	12.22	12.50	16.00	15.37
		40	5200		12.35	12.67	16.00	15.52
		44	5220		12.42	12.53	16.00	15.49
		48	5240		12.51	12.62	16.00	15.58
	802.11n HT40	38	5190	MCS8	12.40	12.40	16.00	15.41
		46	5230		12.54	12.44	16.00	15.50
	802.11ac VHT20	36	5180	MCS8	12.44	12.32	16.00	15.39
		40	5200		12.51	12.37	16.00	15.45
		44	5220		12.56	12.42	16.00	15.50
		48	5240		12.58	12.47	16.00	15.54
	802.11ac VHT40	38	5190	MCS8	12.32	12.56	16.00	15.45
		46	5230		12.20	12.62	16.00	15.43
	802.11ac VHT80	42	5210	MCS8	12.49	12.64	16.00	15.58

Note:

- 1) The Average conducted power of 5.2G WiFi is measured with RMS detector.
- 2) The tested channel results are marks in bold.

3. Conducted power measurements of 5.3G WiFi

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.3G WIFI _1TX _Main Ant	802.11a	52	5260	6	13.00	12.82
		56	5280		13.00	12.74
		60	5300		13.00	12.86
		64	5320		13.00	12.73
	802.11n HT20	52	5260	MCS0	13.00	12.64
		56	5280		13.00	12.68
		60	5300		13.00	12.65
		64	5320		13.00	12.65
	802.11n HT40	54	5270	MCS0	13.00	12.67
		62	5310		13.00	12.69
	802.11ac VHT20	52	5260	MCS0	13.00	12.82
		56	5280		13.00	12.83
		60	5300		13.00	12.80
		64	5320		13.00	12.81
	802.11ac VHT40	54	5270	MCS0	13.00	12.75
		62	5310		13.00	12.73
	802.11ac VHT80	58	5290	MCS0	13.00	12.50

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.3G WIFI _1TX _Aux Ant	802.11a	52	5260	6	13.00	12.63
		56	5280		13.00	12.40
		60	5300		13.00	12.58
		64	5320		13.00	12.52
	802.11n HT20	52	5260	MCS0	13.00	12.58
		56	5280		13.00	12.53
		60	5300		13.00	12.57
		64	5320		13.00	12.43
	802.11n HT40	54	5270	MCS0	13.00	12.38
		62	5310		13.00	12.41
	802.11ac VHT20	52	5260	MCS0	13.00	12.45
		56	5280		13.00	12.49
		60	5300		13.00	12.41
		64	5320		13.00	12.50
	802.11ac VHT40	54	5270	MCS0	13.00	12.56
		62	5310		13.00	12.61
	802.11ac VHT80	58	5290	MCS0	13.00	12.55

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT Main Average Power(dBm)	ANT Aux Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
5.3G WIFI _2TX _Main Ant + Aux Ant	802.11a	52	5260	6	12.82	12.40	16.00	15.63
		56	5280		12.73	12.40	16.00	15.58
		60	5300		12.86	12.28	16.00	15.59
		64	5320		12.73	12.22	16.00	15.49
	802.11n HT20	52	5260	MCS8	12.64	12.58	16.00	15.62
		56	5280		12.68	12.53	16.00	15.62
		60	5300		12.65	12.57	16.00	15.62
		64	5320		12.65	12.43	16.00	15.55
	802.11n HT40	54	5270	MCS8	12.67	12.38	16.00	15.54
		62	5310		12.69	12.41	16.00	15.56
	802.11ac VHT20	52	5260	MCS8	12.87	12.45	16.00	15.68
		56	5280		12.83	12.49	16.00	15.67
		60	5300		12.80	12.41	16.00	15.62
		64	5320		12.85	12.50	16.00	15.69
	802.11ac VHT40	54	5270	MCS8	12.75	12.56	16.00	15.67
		62	5310		12.73	12.61	16.00	15.68
	802.11ac VHT80	58	5290	MCS8	12.50	12.65	16.00	15.59

Note:

- 1) The Average conducted power of 5.3G WiFi is measured with RMS detector.
- 2) The tested channel results are marks in bold.

4. Conducted power measurements of 5.6G WiFi

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.6G WIFI _1TX _Main Ant	802.11a	100	5500	6	13.00	12.85
		104	5520		13.00	12.72
		108	5540		13.00	12.78
		112	5560		13.00	12.67
		116	5580		13.00	12.81
		132	5660		13.00	12.70
		136	5680		13.00	12.80
		140	5700		13.00	12.78
		144	5720		13.00	12.71
	802.11n HT20	100	5500	MCS0	13.00	12.71
		104	5520		13.00	12.78
		108	5540		13.00	12.70
		112	5560		13.00	12.60
		116	5580		13.00	12.60
		132	5660		13.00	12.73
		136	5680		13.00	12.75
		140	5700		13.00	12.70
		144	5720		13.00	12.74
	802.11n HT40	102	5510	MCS0	13.00	12.70
		110	5550		13.00	12.72
		118	5590		13.00	12.76
		126	5630		13.00	12.75
		134	5670		13.00	12.78
		142	5710		13.00	12.77
	802.11ac VHT20	100	5500	MCS0	13.00	12.79
		104	5520		13.00	12.61
		108	5540		13.00	12.79
		112	5560		13.00	12.65
		116	5580		13.00	12.80
		132	5660		13.00	12.77
		136	5680		13.00	12.77
		140	5700		13.00	12.75
		144	5720		13.00	12.72

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.6G WIFI _1TX _Main Ant	802.11ac VHT40	102	5510	MCS0	13.00	12.80
		110	5550		13.00	12.80
		118	5590		13.00	12.78
		126	5630		13.00	12.61
		134	5670		13.00	12.65
		142	5710		13.00	12.62
	802.11ac VHT80	106	5530	MCS0	13.00	12.70
		122	5610		13.00	12.71
		138	5690		13.00	12.80

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.6G WIFI _1TX _Aux Ant	802.11a	100	5500	6	13.00	12.52
		104	5520		13.00	12.62
		108	5540		13.00	12.42
		112	5560		13.00	12.63
		116	5580		13.00	12.57
		132	5660		13.00	12.72
		136	5680		13.00	12.45
		140	5700		13.00	12.52
		144	5720		13.00	12.53
	802.11n HT20	100	5500	MCS0	13.00	12.53
		104	5520		13.00	12.44
		108	5540		13.00	12.35
		112	5560		13.00	12.54
		116	5580		13.00	12.48
		132	5660		13.00	12.64
		136	5680		13.00	12.61
		140	5700		13.00	12.60
		144	5720		13.00	12.70
	802.11n HT40	102	5510	MCS0	13.00	12.41
		110	5550		13.00	12.53
		118	5590		13.00	12.52
		126	5630		13.00	12.49
		134	5670		13.00	12.43
		142	5710		13.00	12.41
	802.11ac VHT20	100	5500	MCS0	13.00	12.44
		104	5520		13.00	12.69
		108	5540		13.00	12.34
		112	5560		13.00	12.50
		116	5580		13.00	12.69
		132	5660		13.00	12.58
		136	5680		13.00	12.65
		140	5700		13.00	12.63
		144	5720		13.00	12.67

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.6G WIFI _1TX _Aux Ant	802.11ac VHT40	102	5510	MCS0	13.00	12.56
		110	5550		13.00	12.58
		118	5590		13.00	12.64
		126	5630		13.00	12.57
		134	5670		13.00	12.58
		142	5710		13.00	12.56
	802.11ac VHT80	106	5530	MCS0	13.00	12.61
		122	5610		13.00	12.59
		138	5690		13.00	12.70

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT Main Average Power(dBm)	ANT Aux Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
5.6G WIFI _2TX _Main Ant + Aux Ant	802.11a	100	5500	6	12.91	12.52	16.00	15.73
		104	5520		12.72	12.62	16.00	15.68
		108	5540		12.78	12.42	16.00	15.61
		112	5560		12.67	12.63	16.00	15.66
		116	5580		12.88	12.57	16.00	15.74
		132	5660		12.70	12.69	16.00	15.71
		136	5680		12.80	12.45	16.00	15.64
		140	5700		12.78	12.52	16.00	15.66
		144	5720		12.71	12.53	16.00	15.63
	802.11n HT20	100	5500	MCS8	12.71	12.53	16.00	15.63
		104	5520		12.90	12.44	16.00	15.69
		108	5540		12.70	12.35	16.00	15.54
		112	5560		12.60	12.54	16.00	15.58
		116	5580		12.60	12.48	16.00	15.55
		132	5660		12.73	12.64	16.00	15.70
		136	5680		12.75	12.61	16.00	15.69
		140	5700		12.70	12.70	16.00	15.71
		144	5720		12.74	12.73	16.00	15.75
	802.11n HT40	102	5510	MCS8	12.70	12.41	16.00	15.57
		110	5550		12.72	12.53	16.00	15.64
		118	5590		12.87	12.52	16.00	15.71
		126	5630		12.75	12.49	16.00	15.63
		134	5670		12.82	12.43	16.00	15.64
		142	5710		12.77	12.41	16.00	15.60
	802.11ac VHT20	100	5500	MCS8	12.79	12.44	16.00	15.63
		104	5520		12.61	12.73	16.00	15.68
		108	5540		12.79	12.34	16.00	15.58
		112	5560		12.65	12.50	16.00	15.59
		116	5580		12.80	12.69	16.00	15.76
		132	5660		12.77	12.58	16.00	15.69
		136	5680		12.77	12.65	16.00	15.72
		140	5700		12.75	12.63	16.00	15.70
		144	5720		12.72	12.67	16.00	15.71

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT Main Average Power(dBm)	ANT Aux Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
5.6G WIFI _2TX _Main Ant + Aux Ant	802.11ac VHT40	102	5510	MCS8	12.80	12.56	16.00	15.69
		110	5550		12.80	12.58	16.00	15.70
		118	5590		12.90	12.64	16.00	15.78
		126	5630		12.61	12.57	16.00	15.60
		134	5670		12.65	12.58	16.00	15.63
		142	5710		12.62	12.56	16.00	15.60
	802.11ac VHT80	106	5530	MCS8	12.70	12.65	16.00	15.69
		122	5610		12.71	12.66	16.00	15.70
		138	5690		12.80	12.70	16.00	15.76

Note:

- 1) The Average conducted power of 5.6G WiFi is measured with RMS detector.
- 2) The tested channel results are marks in bold.

5. Conducted power measurements of 5.8G WiFi

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.8G WIFI _1TX _Main Ant	802.11a	149	5745	6	13.00	12.84
		153	5765		13.00	12.85
		157	5785		13.00	12.82
		161	5805		13.00	12.94
		165	5825		13.00	12.81
	802.11n HT20	149	5745	MCS0	13.00	12.66
		153	5765		13.00	12.80
		157	5785		13.00	12.71
		161	5805		13.00	12.83
		165	5825		13.00	12.78
	802.11n HT40	151	5755	MCS0	13.00	12.80
		159	5795		13.00	12.77
	802.11ac VHT20	149	5745	MCS0	13.00	12.70
		153	5765		13.00	12.82
		157	5785		13.00	12.74
		161	5805		13.00	12.67
		165	5825		13.00	12.77
	802.11ac VHT40	151	5755	MCS0	13.00	12.75
		159	5795		13.00	12.75
	802.11ac VHT80	155	5775	MCS0	13.00	12.66

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.8G WIFI _1TX _Aux Ant	802.11a	149	5745	6	13.00	12.67
		153	5765		13.00	12.52
		157	5785		13.00	12.57
		161	5805		13.00	12.42
		165	5825		13.00	12.51
	802.11n HT20	149	5745	MCS0	13.00	12.60
		153	5765		13.00	12.62
		157	5785		13.00	12.60
		161	5805		13.00	12.65
		165	5825		13.00	12.49
	802.11n HT40	151	5755	MCS0	13.00	12.44
		159	5795		13.00	12.41
	802.11ac VHT20	149	5745	MCS0	13.00	12.58
		153	5765		13.00	12.60
		157	5785		13.00	12.62
		161	5805		13.00	12.59
		165	5825		13.00	12.55
	802.11ac VHT40	151	5755	MCS0	13.00	12.65
		159	5795		13.00	12.61
	802.11ac VHT80	155	5775	MCS0	13.00	12.66

Band	Mode	Channel	Frequency (MHz)	Data Rate(Mbps)	ANT Main Average Power(dBm)	ANT Aux Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
5.8G WIFI _2TX _Main Ant + Aux Ant	802.11a	149	5745	6	12.84	12.64	16.00	15.75
		153	5765		12.85	12.52	16.00	15.70
		157	5785		12.82	12.57	16.00	15.71
		161	5805		12.94	12.42	16.00	15.70
		165	5825		12.81	12.51	16.00	15.67
	802.11n HT20	149	5745	MCS8	12.66	12.60	16.00	15.64
		153	5765		12.80	12.67	16.00	15.75
		157	5785		12.71	12.60	16.00	15.67
		161	5805		12.83	12.70	16.00	15.78
		165	5825		12.78	12.49	16.00	15.65
	802.11n HT40	151	5755	MCS8	12.80	12.44	16.00	15.63
		159	5795		12.77	12.41	16.00	15.60
	802.11ac VHT20	149	5745	MCS8	12.70	12.58	16.00	15.65
		153	5765		12.82	12.70	16.00	15.77
		157	5785		12.74	12.62	16.00	15.69
		161	5805		12.67	12.59	16.00	15.64
		165	5825		12.77	12.55	16.00	15.67
	802.11ac VHT40	151	5755	MCS8	12.75	12.65	16.00	15.71
		159	5795		12.75	12.61	16.00	15.69
	802.11ac VHT80	155	5775	MCS8	12.66	12.66	16.00	15.67

Note:

- 1) The Average conducted power of 5.8G WiFi is measured with RMS detector.
- 2) The tested channel results are marks in bold.

6. Overlapped channels between 5.6G-5.8G WiFi

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.6G-5.8G WIFI _1TX _Main _Ant	802.11a	144 (UNII-2C)	5720	6M	13.00	12.77
	802.11a	144 (UNII-3)	5720	6M	9.50	9.23
	802.11ac VHT20	144 (UNII-2C)	5720	MCS0	13.00	12.81
	802.11ac VHT20	144 (UNII-3)	5720	MCS0	9.50	9.16
	802.11ac VHT40	142 (UNII-2C)	5710	MCS0	13.00	12.51
	802.11ac VHT40	142 (UNII-3)	5710	MCS0	7.00	6.61
	802.11ac VHT80	138 (UNII-2C)	5690	MCS0	13.00	12.58
	802.11ac VHT80	138 (UNII-3)	5690	MCS0	2.00	1.56

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
5.6G-5.8G WIFI _1TX _Aux _Ant	802.11a	144 (UNII-2C)	5720	6M	13.00	12.57
	802.11a	144 (UNII-3)	5720	6M	10.00	9.69
	802.11ac VHT20	144 (UNII-2C)	5720	MCS0	13.00	12.58
	802.11ac VHT20	144 (UNII-3)	5720	MCS0	10.50	10.26
	802.11ac VHT40	142 (UNII-2C)	5710	MCS0	13.00	12.54
	802.11ac VHT40	142 (UNII-3)	5710	MCS0	7.00	6.44
	802.11ac VHT80	138 (UNII-2C)	5690	MCS0	13.00	12.47
	802.11ac VHT80	138 (UNII-3)	5690	MCS0	1.50	1.39

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT Main Average Power(dBm)	ANT Aux Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
5.6G-5.8G WIFI _2TX _Main Ant + Aux Ant	802.11a	144 (UNII-2C)	5720	6M	12.77	12.57	16.00	15.68
	802.11a	144 (UNII-3)	5720	6M	9.23	9.69	13.00	12.48
	802.11ac VHT20	144 (UNII-2C)	5720	MCS8	12.81	12.58	16.00	15.71
	802.11ac VHT20	144 (UNII-3)	5720	MCS8	9.16	10.26	13.50	12.76
	802.11ac VHT40	142 (UNII-2C)	5710	MCS8	12.51	12.54	16.00	15.54
	802.11ac VHT40	142 (UNII-3)	5710	MCS8	6.61	6.44	10.00	9.54
	802.11ac VHT80	138 (UNII-2C)	5690	MCS8	12.58	12.47	16.00	15.54
	802.11ac VHT80	138 (UNII-3)	5690	MCS8	1.56	1.39	5.00	4.49

7.2 SAR TEST RESULTS

General Notes:

- 1) Per KDB447498 D01, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

WLAN Notes:

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHZ WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.1 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 for 5GHZ WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed power. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg. See Section 7.1 for more information.

7.2.1 SAR MEASUREMENT RESULT

For Notebook Mode:

1. SAR test results of WIFI 2.4G

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Ant	Ant Vendor	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
W01	802.11b	6	Back of Screen	2.5	Main	ZTX	1	95.91	15.0	14.97	0.05	<0.001	<0.001	<0.001
W02	802.11b	6	Back of keyboard	0	Main	ZTX	1	95.91	15.0	14.97	0	0.446	0.228	0.468
W03	802.11b	1	Back of keyboard	0	Main	ZTX	1	95.91	15.0	14.89	0.01	0.485	0.248	0.519
W04	802.11b	11	Back of keyboard	0	Main	ZTX	1	95.91	15.0	14.87	0.13	0.401	0.205	0.431
W05	802.11b	1	Back of keyboard	0	Main	NDX	1	95.91	15.0	14.89	-0.05	0.458	0.240	0.490
W07	802.11b	6	Back of Screen	2.5	Aux	ZTX	1	95.91	15.0	14.62	0.01	<0.001	<0.001	<0.001
W08	802.11b	6	Back of keyboard	0	Aux	ZTX	1	95.91	15.0	14.62	0	0.171	0.078	0.195
W09	802.11b	11	Back of keyboard	0	Aux	ZTX	1	95.91	15.0	14.45	0	0.193	0.077	0.228
W10	802.11b	1	Back of keyboard	0	Aux	ZTX	1	95.91	15.0	14.39	0	0.184	0.054	0.221
W11	802.11b	11	Back of keyboard	0	Aux	NDX	1	95.91	15.0	14.45	-0.02	0.186	0.068	0.220

Note: The value with boldface is the maximum SAR Value of each test band.

2. SAR test results of BT

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Ant	Ant Vendor	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
B01	BT DH5	39	Back of Screen	2.5	Aux	ZTX	1	64.00	12.5	11.54	0.06	<0.001	<0.001	<0.001
B02	BT DH5	39	Back of keyboard	0	Aux	ZTX	1	64.00	12.5	11.54	0	0.221	0.092	0.360
B03	BT DH5	0	Back of keyboard	0	Aux	ZTX	1	64.00	12.5	11.64	0	0.202	0.088	0.321
B04	BT DH5	78	Back of keyboard	0	Aux	ZTX	1	64.00	12.5	11.56	0	0.243	0.105	0.393
B05	BT DH5	78	Back of keyboard	0	Aux	NDX	1	64.00	12.5	11.56	0	0.231	0.091	0.374

Note: The value with boldface is the maximum SAR Value of each test band.

3. SAR test results of WIFI 5G

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Ant	Ant Vendor	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
W13	802.11a	40	Back of Screen	2.5	Main	ZTX	6	98.54	13.0	12.62	0.05	<0.001	<0.001	<0.001
W14	802.11a	40	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.62	0.14	0.414	0.108	0.459
W15	802.11a	36	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.51	0.06	0.497	0.140	0.565
W16	802.11a	44	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.57	0.03	0.316	0.109	0.354
W17	802.11a	36	Back of keyboard	0	Main	NDX	6	98.54	13.0	12.51	0	0.424	0.137	0.482
W19	802.11a	48	Back of Screen	2.5	Aux	ZTX	6	98.54	13.0	12.67	-0.01	<0.001	<0.001	<0.001
W20	802.11a	48	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.67	0.09	0.335	0.153	0.367
W21	802.11a	40	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.55	0.07	0.216	0.105	0.243
W22	802.11a	44	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.63	0.04	0.262	0.123	0.290
W23	802.11a	48	Back of keyboard	0	Aux	NDX	6	98.54	13.0	12.67	0.18	0.305	0.179	0.334
W25	802.11a	60	Back of Screen	2.5	Main	ZTX	6	98.54	13.0	12.86	-0.11	<0.001	<0.001	<0.001
W26	802.11a	60	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.86	0.02	0.818	0.248	0.857
W27	802.11a	52	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.82	0.01	0.645	0.209	0.682
W28	802.11a	56	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.74	0.05	0.773	0.217	0.833
W29	802.11a	60	Back of keyboard	0	Main	NDX	6	98.54	13.0	12.86	-0.12	0.675	0.237	0.707
W30	802.11a	60	Back of keyboard (Repeated)	0	Main	ZTX	6	98.54	13.0	12.86	0.02	0.809	0.241	0.848
W32	802.11a	52	Back of Screen	2.5	Aux	ZTX	6	98.54	13.0	12.63	0.05	<0.001	<0.001	<0.001
W33	802.11a	52	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.63	0.09	0.291	0.137	0.322
W34	802.11a	60	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.58	-0.01	0.315	0.148	0.352
W35	802.11a	64	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.52	0.06	0.294	0.138	0.333
W36	802.11a	60	Back of keyboard	0	Aux	NDX	6	98.54	13.0	12.58	-0.17	0.253	0.104	0.283
W38	802.11a	100	Back of Screen	2.5	Main	ZTX	6	98.54	13.0	12.85	0.01	<0.001	<0.001	<0.001
W39	802.11a	100	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.85	0.02	0.495	0.152	0.520
W40	802.11a	116	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.81	0.03	0.614	0.203	0.651
W41	802.11a	136	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.80	0.16	0.666	0.218	0.708
W42	802.11a	136	Back of keyboard	0	Main	NDX	6	98.54	13.0	12.80	0.06	0.590	0.202	0.627
W44	802.11a	132	Back of Screen	2.5	Aux	ZTX	6	98.54	13.0	12.72	-0.08	<0.001	<0.001	<0.001
W45	802.11a	132	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.72	0.05	0.336	0.147	0.364
W46	802.11a	104	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.62	0.03	0.260	0.123	0.288
W47	802.11a	112	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.63	0.09	0.222	0.108	0.245
W48	802.11a	132	Back of keyboard	0	Aux	NDX	6	98.54	13.0	12.72	0.11	0.307	0.127	0.332
W50	802.11a	161	Back of Screen	2.5	Main	ZTX	6	98.54	13.0	12.94	-0.11	<0.001	<0.001	<0.001
W51	802.11a	161	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.94	0.08	0.313	0.112	0.322
W52	802.11a	153	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.85	-0.08	0.344	0.118	0.361
W53	802.11a	149	Back of keyboard	0	Main	ZTX	6	98.54	13.0	12.84	0.09	0.358	0.122	0.377
W54	802.11a	149	Back of keyboard	0	Main	NDX	6	98.54	13.0	12.84	0.16	0.337	0.115	0.355
W56	802.11a	149	Back of Screen	2.5	Aux	ZTX	6	98.54	13.0	12.67	0.09	<0.001	<0.001	<0.001
W57	802.11a	149	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.67	0.04	0.230	0.104	0.252
W58	802.11a	157	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.57	0.02	0.239	0.107	0.268
W59	802.11a	153	Back of keyboard	0	Aux	ZTX	6	98.54	13.0	12.52	-0.06	0.238	0.106	0.270
W60	802.11a	153	Back of keyboard	0	Aux	NDX	6	98.54	13.0	12.52	0.05	0.217	0.098	0.246

Note: The value with boldface is the maximum SAR Value of each test band.

For Tablet Mode:

1. SAR test results of WIFI 2.4G

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Ant	Ant Vendor	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
W62	802.11b	6	Rear Face	0	Main	ZTX	1	95.91	15.0	14.97	0	0.763	0.367	0.801
W63	802.11b	6	Left Side	0	Main	ZTX	1	95.91	15.0	14.97	0.1	<0.001	<0.001	<0.001
W64	802.11b	6	Right Side	0	Main	ZTX	1	95.91	15.0	14.97	-0.07	<0.001	<0.001	<0.001
W65	802.11b	6	Top Side	0	Main	ZTX	1	95.91	15.0	14.97	0.03	0.068	0.037	0.071
W66	802.11b	1	Rear Face	0	Main	ZTX	1	95.91	15.0	14.89	0	0.878	0.417	0.939
W67	802.11b	11	Rear Face	0	Main	ZTX	1	95.91	15.0	14.87	0	0.768	0.362	0.825
W68	802.11b	1	Rear Face	0	Main	NDX	1	95.91	15.0	14.89	0.19	0.685	0.329	0.733
W69	802.11b	1	Rear Face (Repeated)	0	Main	ZTX	1	95.91	15.0	14.89	0.12	0.849	0.402	0.908
W71	802.11b	6	Rear Face	0	Aux	ZTX	1	95.91	15.0	14.62	0	0.414	0.184	0.471
W72	802.11b	6	Left Side	0	Aux	ZTX	1	95.91	15.0	14.62	0.01	<0.001	<0.001	<0.001
W73	802.11b	6	Right Side	0	Aux	ZTX	1	95.91	15.0	14.62	-0.05	<0.001	<0.001	<0.001
W74	802.11b	6	Top Side	0	Aux	ZTX	1	95.91	15.0	14.62	0.08	0.047	0.025	0.053
W75	802.11b	11	Rear Face	0	Aux	ZTX	1	95.91	15.0	14.45	0	0.408	0.180	0.483
W76	802.11b	1	Rear Face	0	Aux	ZTX	1	95.91	15.0	14.39	0	0.469	0.210	0.563
W77	802.11b	1	Rear Face	0	Aux	NDX	1	95.91	15.0	14.39	0.17	0.349	0.159	0.419

Note: The value with boldface is the maximum SAR Value of each test band.

2. SAR test results of BT

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Ant	Ant Vendor	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
B06	BT DH5	39	Rear Face	0	Aux	ZTX	1	64.00	12.5	11.54	0	0.250	0.108	0.407
B07	BT DH5	39	Left Side	0	Aux	ZTX	1	64.00	12.5	11.54	0.19	<0.001	<0.001	<0.001
B08	BT DH5	39	Right Side	0	Aux	ZTX	1	64.00	12.5	11.54	0.03	<0.001	<0.001	<0.001
B09	BT DH5	39	Top Side	0	Aux	ZTX	1	64.00	12.5	11.54	-0.16	0.031	0.014	0.050
B10	BT DH5	0	Rear Face	0	Aux	ZTX	1	64.00	12.5	11.64	0	0.215	0.098	0.342
B11	BT DH5	78	Rear Face	0	Aux	ZTX	1	64.00	12.5	11.56	-0.05	0.238	0.104	0.385
B12	BT DH5	39	Rear Face	0	Aux	NDX	1	64.00	12.5	11.54	0.02	0.215	0.095	0.350

Note: The value with boldface is the maximum SAR Value of each test band.

3. SAR test results of WIFI 5G

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Ant	Ant Vendor	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
W79	802.11a	40	Rear Face	0	Main	ZTX	6	98.54	13.0	12.62	-0.09	0.801	0.259	0.887
W80	802.11a	40	Left Side	0	Main	ZTX	6	98.54	13.0	12.62	0.06	<0.001	<0.001	<0.001
W81	802.11a	40	Right Side	0	Main	ZTX	6	98.54	13.0	12.62	-0.01	<0.001	<0.001	<0.001
W82	802.11a	40	Top Side	0	Main	ZTX	6	98.54	13.0	12.62	0.02	0.222	0.089	0.246
W83	802.11a	36	Rear Face	0	Main	ZTX	6	98.54	13.0	12.51	0	0.759	0.244	0.862
W84	802.11a	44	Rear Face	0	Main	ZTX	6	98.54	13.0	12.57	0	0.921	0.282	1.032
W85	802.11a	44	Rear Face	0	Main	NDX	6	98.54	13.0	12.57	-0.03	0.869	0.251	0.974
W86	802.11a	44	Rear Face (Repeated)	0	Main	ZTX	6	98.54	13.0	12.57	-0.15	0.906	0.273	1.015
W88	802.11a	48	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.67	0	0.630	0.222	0.690
W89	802.11a	48	Left Side	0	Aux	ZTX	6	98.54	13.0	12.67	-0.05	<0.001	<0.001	<0.001
W90	802.11a	48	Right Side	0	Aux	ZTX	6	98.54	13.0	12.67	0.03	<0.001	<0.001	<0.001
W91	802.11a	48	Top Side	0	Aux	ZTX	6	98.54	13.0	12.67	0.07	0.140	0.051	0.153
W92	802.11a	40	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.55	0.01	0.535	0.180	0.602
W93	802.11a	44	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.63	0	0.511	0.172	0.565
W94	802.11a	48	Rear Face	0	Aux	NDX	6	98.54	13.0	12.67	0.17	0.605	0.197	0.662
W96	802.11a	60	Rear Face	0	Main	ZTX	6	98.54	13.0	12.86	0	1.170	0.356	1.226
W97	802.11a	60	Left Side	0	Main	ZTX	6	98.54	13.0	12.86	-0.03	<0.001	<0.001	<0.001
W98	802.11a	60	Right Side	0	Main	ZTX	6	98.54	13.0	12.86	0.04	<0.001	<0.001	<0.001
W99	802.11a	60	Top Side	0	Main	ZTX	6	98.54	13.0	12.86	0.05	0.370	0.129	0.388
W100	802.11a	52	Rear Face	0	Main	ZTX	6	98.54	13.0	12.82	0	0.996	0.290	1.054
W101	802.11a	56	Rear Face	0	Main	ZTX	6	98.54	13.0	12.74	0	1.080	0.325	1.164
W102	802.11a	60	Rear Face	0	Main	NDX	6	98.54	13.0	12.86	0.1	0.993	0.301	1.041
W103	802.11a	60	Rear Face (Repeated)	0	Main	ZTX	6	98.54	13.0	12.86	0.02	1.140	0.351	1.195
W105	802.11a	52	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.63	0	0.666	0.232	0.736
W106	802.11a	52	Left Side	0	Aux	ZTX	6	98.54	13.0	12.63	-0.09	<0.001	<0.001	<0.001
W107	802.11a	52	Right Side	0	Aux	ZTX	6	98.54	13.0	12.63	0.03	<0.001	<0.001	<0.001
W108	802.11a	52	Top Side	0	Aux	ZTX	6	98.54	13.0	12.63	0.07	0.149	0.049	0.165
W109	802.11a	60	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.58	0	0.589	0.209	0.658
W110	802.11a	64	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.52	0	0.660	0.222	0.748
W111	802.11a	64	Rear Face	0	Aux	NDX	6	98.54	13.0	12.52	0	0.618	0.211	0.700
W113	802.11a	100	Rear Face	0	Main	ZTX	6	98.54	13.0	12.85	0.04	0.764	0.279	0.803
W114	802.11a	100	Left Side	0	Main	ZTX	6	98.54	13.0	12.85	-0.01	<0.001	<0.001	<0.001
W115	802.11a	100	Right Side	0	Main	ZTX	6	98.54	13.0	12.85	-0.08	<0.001	<0.001	<0.001
W116	802.11a	100	Top Side	0	Main	ZTX	6	98.54	13.0	12.85	0.03	0.332	0.107	0.349
W117	802.11a	116	Rear Face	0	Main	ZTX	6	98.54	13.0	12.81	0.06	0.926	0.313	0.982
W118	802.11a	136	Rear Face	0	Main	ZTX	6	98.54	13.0	12.80	0.01	0.810	0.288	0.861
W119	802.11a	116	Rear Face	0	Main	NDX	6	98.54	13.0	12.81	0.09	0.851	0.295	0.902
W120	802.11a	116	Rear Face (Repeated)	0	Main	ZTX	6	98.54	13.0	12.81	0.06	0.913	0.304	0.968
W122	802.11a	132	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.72	0.06	0.765	0.285	0.828
W123	802.11a	132	Left Side	0	Aux	ZTX	6	98.54	13.0	12.72	0.01	0.043	0.012	0.047
W124	802.11a	132	Right Side	0	Aux	ZTX	6	98.54	13.0	12.72	0.03	<0.001	<0.001	<0.001
W125	802.11a	132	Top Side	0	Aux	ZTX	6	98.54	13.0	12.72	-0.11	0.126	0.046	0.136
W126	802.11a	104	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.62	0.05	0.711	0.253	0.788
W127	802.11a	112	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.63	0.09	0.674	0.227	0.745
W128	802.11a	132	Rear Face	0	Aux	NDX	6	98.54	13.0	12.72	0.17	0.663	0.248	0.718

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Ant	Ant Vendor	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
W130	802.11a	161	Rear Face	0	Main	ZTX	6	98.54	13.0	12.94	-0.03	0.713	0.231	0.734
W131	802.11a	161	Left Side	0	Main	ZTX	6	98.54	13.0	12.94	0.01	0.011	0.003	0.011
W132	802.11a	161	Right Side	0	Main	ZTX	6	98.54	13.0	12.94	0.17	0.048	0.006	0.049
W133	802.11a	161	Top Side	0	Main	ZTX	6	98.54	13.0	12.94	-0.05	0.314	0.103	0.323
W134	802.11a	153	Rear Face	0	Main	ZTX	6	98.54	13.0	12.85	0.18	0.685	0.227	0.720
W135	802.11a	149	Rear Face	0	Main	ZTX	6	98.54	13.0	12.84	0.07	0.726	0.239	0.764
W136	802.11a	149	Rear Face	0	Main	NDX	6	98.54	13.0	12.84	0.05	0.691	0.225	0.728
W138	802.11a	149	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.67	0.03	0.523	0.206	0.573
W139	802.11a	149	Left Side	0	Aux	ZTX	6	98.54	13.0	12.67	0.17	0.070	0.020	0.077
W140	802.11a	149	Right Side	0	Aux	ZTX	6	98.54	13.0	12.67	0.05	0.116	0.030	0.127
W141	802.11a	149	Top Side	0	Aux	ZTX	6	98.54	13.0	12.67	-0.11	0.134	0.055	0.147
W142	802.11a	157	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.57	0.06	0.532	0.210	0.596
W143	802.11a	153	Rear Face	0	Aux	ZTX	6	98.54	13.0	12.52	0.08	0.539	0.213	0.611
W144	802.11a	153	Rear Face	0	Aux	NDX	6	98.54	13.0	12.52	0.01	0.507	0.194	0.575


Note: The value with boldface is the maximum SAR Value of each test band.

7.3 MULTIPLE TRANSMITTER EVALUATION


The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06.

The location of the antennas inside the EUT is shown as below picture:

Notebook state:

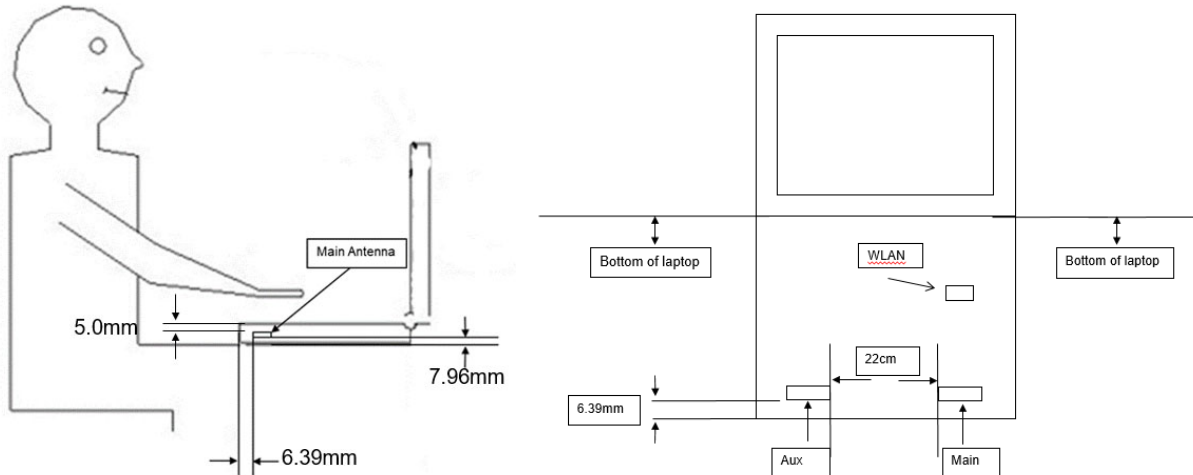

Tablet state:

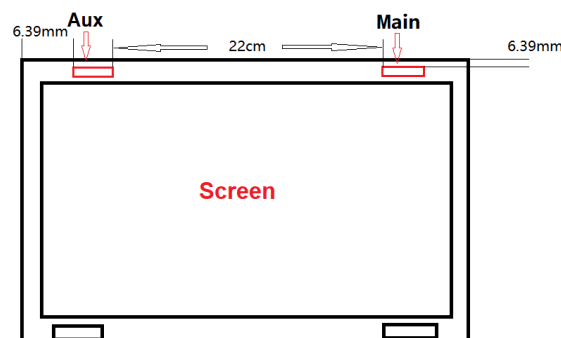

7.3.1 STAND-ALONE SAR TEST EXCLUSION

Per FCC KDB 447498D01, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Body
1	WLAN 2.4G Main Ant + WLAN 2.4G Aux Ant	Yes
2	WLAN 5.2G Main Ant + WLAN 5.2G Aux Ant	Yes
3	WLAN 5.3G Main Ant + WLAN 5.3G Aux Ant	Yes
4	WLAN 5.6G Main Ant + WLAN 5.6G Aux Ant	Yes
5	WLAN 5.8G Main Ant + WLAN 5.8G Aux Ant	Yes
6	WLAN 2.4G Main Ant + BT Aux Ant	Yes
7	WLAN 5.2G Main Ant + BT Aux Ant	Yes
8	WLAN 5.3G Main Ant + BT Aux Ant	Yes
9	WLAN 5.6G Main Ant + BT Aux Ant	Yes
10	WLAN 5.8G Main Ant + BT Aux Ant	Yes

Note: Only the Aux Ant supports BT function.

7.3.2 SIMULTANEOUS TRANSMISSION CONDITIONS

About WIFI and Bluetooth transmit simultaneously

Band \ Position		Notebook Mode		Tablet Mode			
		Back of Screen	Back of Keyboard	Rear Face	Left Side	Right Side	Top Side
Main Ant	WiFi 2.4G	<0.001	0.519	0.939	<0.001	<0.001	0.071
	WiFi 5.2G	<0.001	0.565	1.032	<0.001	<0.001	0.246
	WiFi 5.3G	<0.001	0.857	1.226	<0.001	<0.001	0.388
	WiFi 5.6G	<0.001	0.708	0.982	<0.001	<0.001	0.349
	WiFi 5.8G	<0.001	0.377	0.764	0.011	0.049	0.323
Aux Ant	WiFi 2.4G	<0.001	0.228	0.563	<0.001	<0.001	0.053
	WiFi 5.2G	<0.001	0.367	0.690	<0.001	<0.001	0.153
	WiFi 5.3G	<0.001	0.352	0.748	<0.001	<0.001	0.165
	WiFi 5.6G	<0.001	0.364	0.828	0.047	<0.001	0.136
	WiFi 5.8G	<0.001	0.270	0.611	0.077	0.127	0.147
	BT	<0.001	0.393	0.407	<0.001	<0.001	0.050
MAX $\sum SAR_{1g}$		<0.001	1.250	Refer to SPLSR results	0.088	0.176	0.553

Reported SAR _{1g} \ Test Position		WiFi 2.4G Aux Ant	WiFi 5.2G Aux Ant	WiFi 5.3G Aux Ant	WiFi 5.6G Aux Ant	WiFi 5.8G Aux Ant	BT Aux Ant	MAX $\sum SAR_{1g}$
Rear Face	WiFi 2.4G Main Ant	1.502	/	/	/	/	1.346	1.502
	WiFi 5.2G Main Ant	/	1.722	/	/	/	1.439	Refer to SPLSR results (1)
	WiFi 5.3G Main Ant	/	/	1.974	/	/	1.633	Refer to SPLSR results (2)
	WiFi 5.6G Main Ant	/	/	/	1.810	/	1.389	Refer to SPLSR results (3)
	WiFi 5.8G Main Ant	/	/	/	/	1.375	1.171	1.375

Note:

1) MAX. $\sum SAR_{1g}$ < 1.6 W/Kg, the SAR to peak location separation ratio should not be considered, otherwise, see section 7.3.3 for more information.

2) The highest simultaneous SAR value=1.502W/Kg, per KDB690783 D01.

7.3.3 SIMULTANEOUS TRANSMISSION CONCLUSION

According to KDB447498 D01, When the sum of SAR is larger than limit, SAR test exclusion is determined by the SAR to peak location separation ratio (SPLSR). When the SAR to peak location ratio for each pair of antennas is 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. When 10-g SAR applies, the ratio must be ≤ 0.10 .

When SAR is measured for both antennas in the pair the peak location separation distance is computed by the following formula:


$$\text{Distance}_{\text{Tx1-Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / R_i$$

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location should be translated onto the test device to determine the peak location separation for the antenna pair. The ERP location on the phantom is aligned with the ERP location on the handset, with 6mm separation in the z coordinate due to the ear spacer. A measured peak location can be translated onto the handset, with respect to the ERP location, by ignoring the 6 mm offset in the z coordinate. The assumed peak location of the antenna with estimated SAR can also be determined with respect to the ERP location on the handset. The peak location separation distance is estimated by the x and y coordinated of the peaks, referenced to the ERP location. While flat phantoms are not expected to have these issues, the same peak translation approach should be applied to determine peak location separation.

(1) The sum of aggregate 1g SAR was above 1.6 W/kg for Rear Face configuration with WiFi 5.2G Main Ant and WiFi 5.2G Aux Ant.


The Peak SAR location is as below:

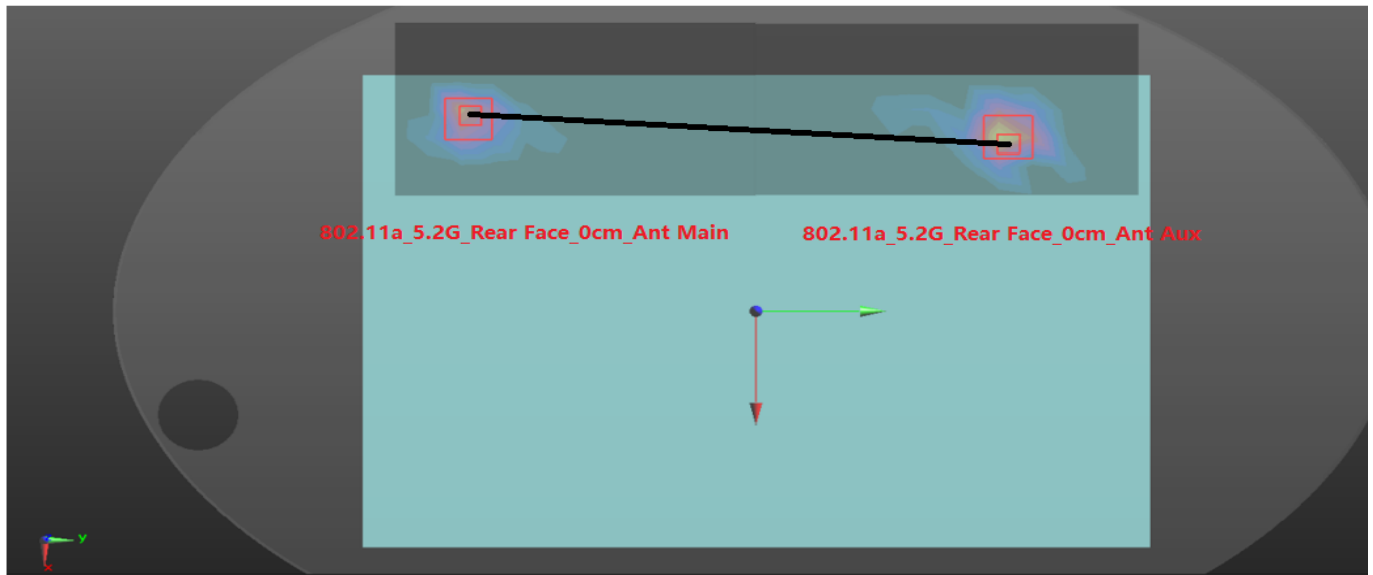

Mode	Reported SAR _{1g}	Peak SAR _{1g}	X	Y	Z	D (mm)	SPLSR	Ratio Limit	Simultaneous SAR
	mW/g	mW/g	m	m	m				
WiFi 5.2G Main Ant	1.032	2.23	-0.099	-0.131	-0.181	252.2	0.009	0.04	No
WiFi 5.2G Aux Ant	0.690	1.37	-0.088	0.121	-0.182				

(2) The sum of aggregate 1g SAR was above 1.6 W/kg for Rear Face configuration with WiFi 5.3G Main Ant and WiFi 5.3G Aux Ant.


The Peak SAR location is as below:

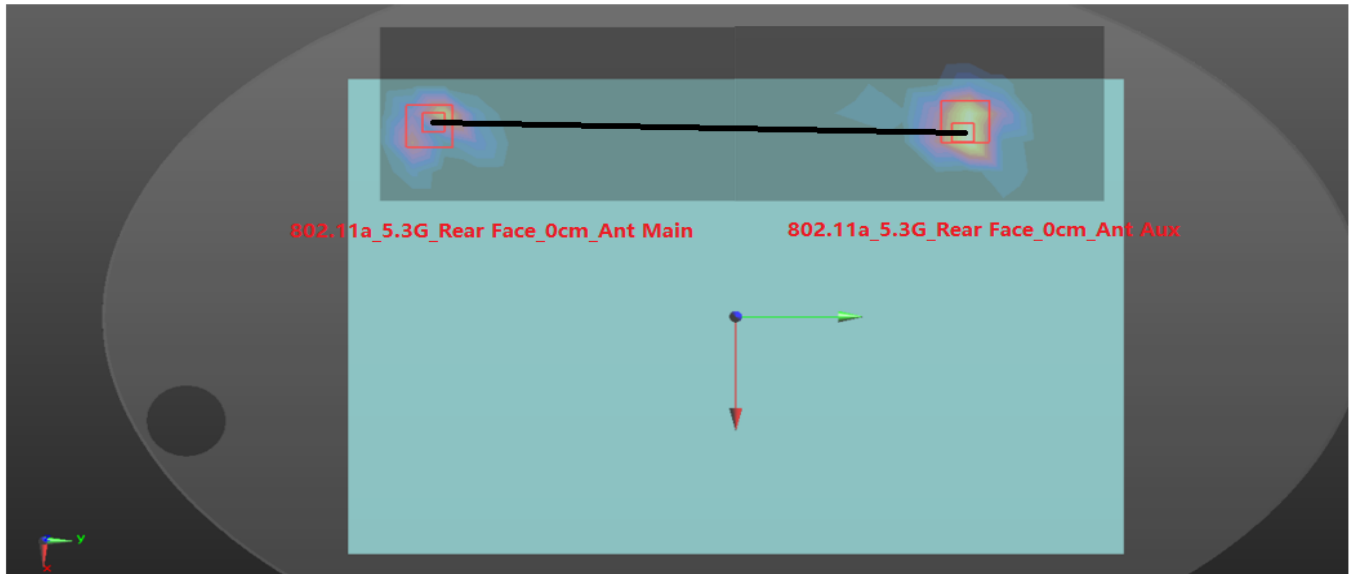

Mode	Reported SAR _{1g}	Peak SAR _{1g}	X	Y	Z	D (mm)	SPLSR	Ratio Limit	Simultaneous SAR
	mW/g	mW/g	m	m	m				
WiFi 5.3G Main Ant	1.226	2.65	-0.104	-0.137	-0.181	249.1	0.011	0.04	No
WiFi 5.3G Aux Ant	0.748	1.49	-0.096	0.112	-0.182				

(3) The sum of aggregate 1g SAR was above 1.6 W/kg for Rear Face configuration with WiFi 5.6G Main Ant and WiFi 5.6G Aux Ant.

The Peak SAR location is as below:

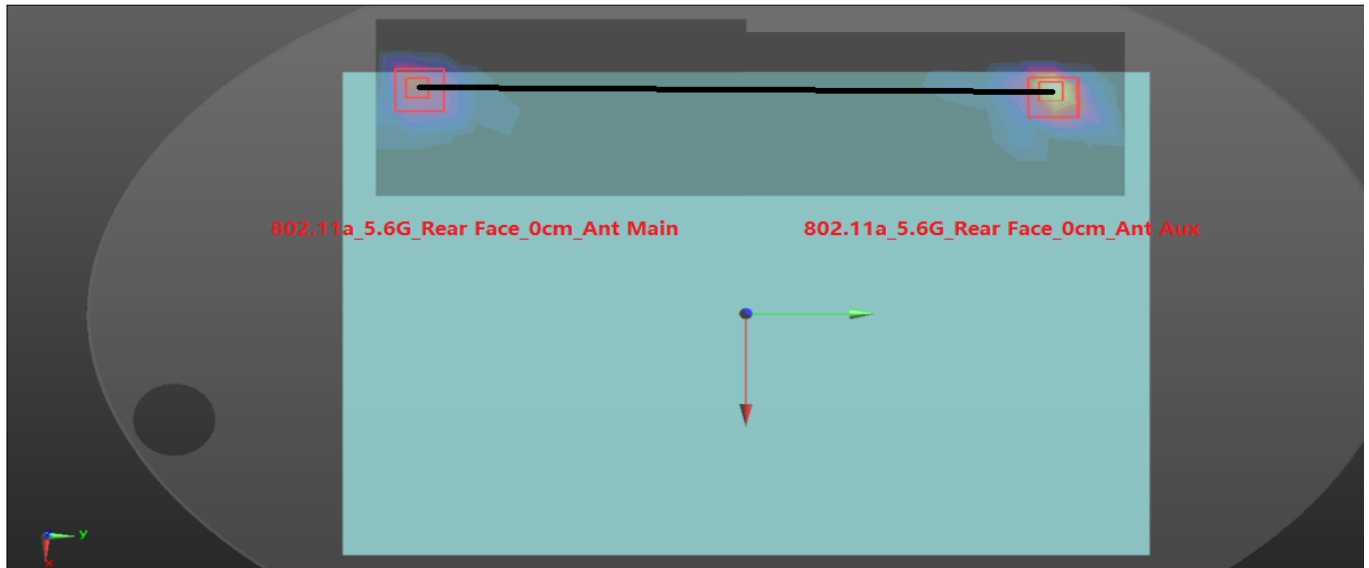


Mode	Reported SAR _{1g}	Peak SAR _{1g}	X	Y	Z	D (mm)	SPLSR	Ratio Limit	Simultaneous SAR
	mW/g	mW/g	m	m	m				
WiFi 5.6G Main Ant	0.982	2.31	-0.114	-0.146	-0.184	280.0	0.009	0.04	No
WiFi 5.6G Aux Ant	0.828	1.81	-0.111	0.134	-0.185				

APPENDIX


1. TEST LAYOUT

Specific Absorption Rate Test Layout

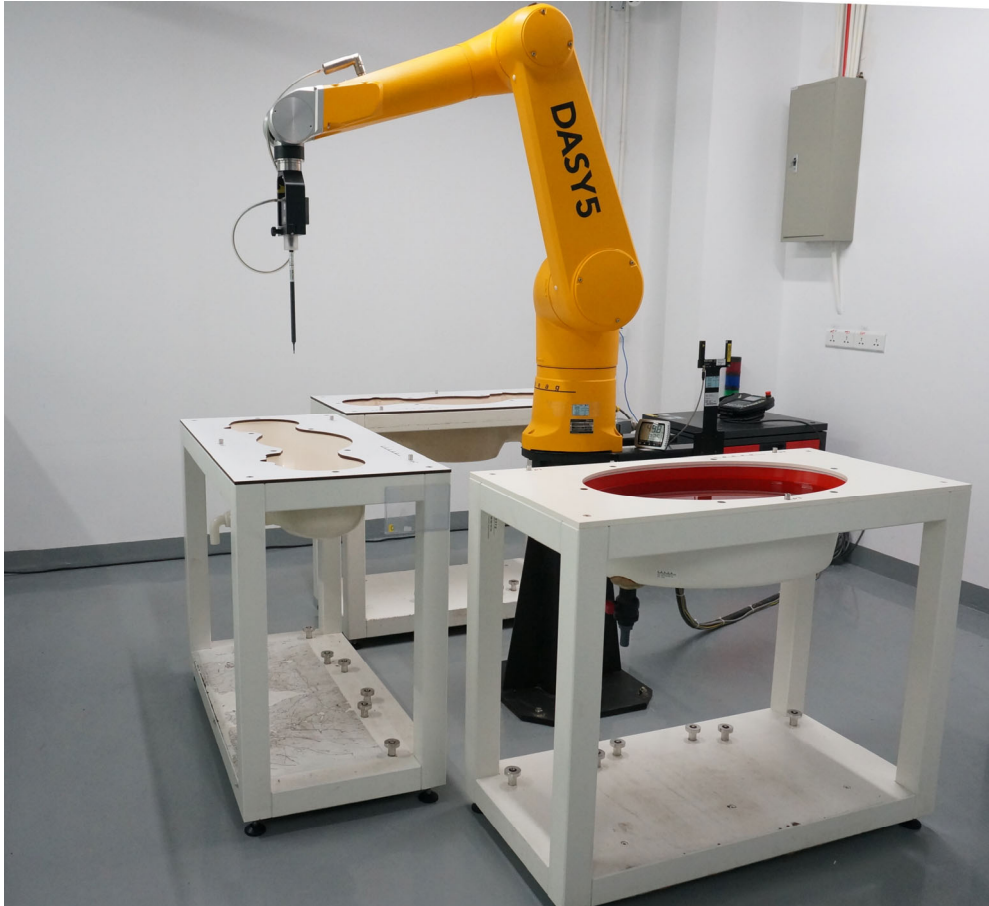

Liquid depth in the flat Phantom ($\geq 15\text{cm}$ depth)

HSL_2300MHz-2700MHz_Body_15.6cm HSL_5000MHz-6000MHz_Body_15.4cm

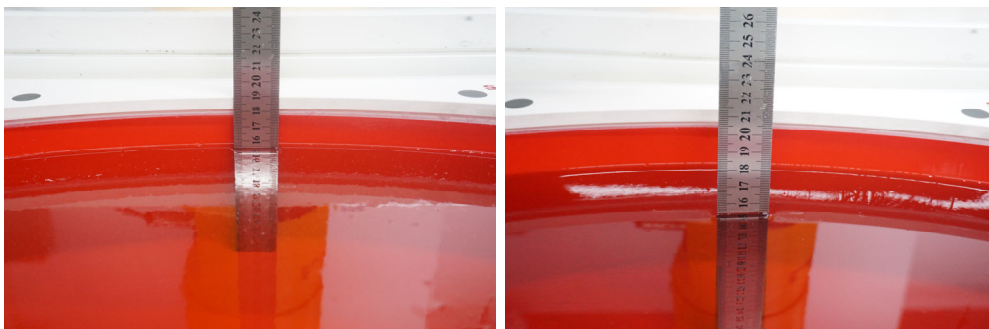

Appendix A. SAR Plots of System Verification

(Pls See BTL-FCC SAR-1-2112C082_Appendix A.)

Appendix B. SAR Plots of SAR Measurement

(Pls See BTL-FCC SAR-1-2112C082_Appendix B.)

Appendix C. Calibration Certificate

(Pls See BTL-FCC SAR-1-2112C082_Appendix C.)

Appendix D. Photographs of the Test Set-Up

(Pls See BTL-FCC SAR-1-2112C082_Appendix D.)

End of Test Report