

# FCC SAR TEST REPORT

FCC ID : TX2-RTL8822CE  
Equipment : 802.11a/b/g/n/ac RTL8822CE Combo module  
Brand Name : Realtek  
Model Name : RTL8822CE  
Applicant : Realtek Semiconductor Corp.  
No. 2, Innovation Road II, Hsinchu Science Park,  
Hsinchu 300, Taiwan  
Standard : FCC 47 CFR Part 2 (2.1093)

The product was tested inside of Lenovo Notebook Computer.

The product was received on Jan. 06, 2022 and testing was started from Jan. 23, 2022 and completed on Jan. 23, 2022. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

  
Approved by: Cona Huang / Deputy Manager



***Sporton International Inc. Wensan Laboratory***



## **Table of Contents**

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>1. Statement of Compliance .....</b>                   | <b>4</b>  |
| <b>2. Guidance Applied.....</b>                           | <b>4</b>  |
| <b>3. Equipment Under Test (EUT) Information .....</b>    | <b>5</b>  |
| 3.1 General Information .....                             | 5         |
| <b>4. RF Exposure Limits.....</b>                         | <b>6</b>  |
| 4.1 Uncontrolled Environment.....                         | 6         |
| 4.2 Controlled Environment.....                           | 6         |
| <b>5. Specific Absorption Rate (SAR).....</b>             | <b>7</b>  |
| 5.1 Introduction .....                                    | 7         |
| 5.2 SAR Definition.....                                   | 7         |
| <b>6. System Description and Setup .....</b>              | <b>8</b>  |
| 6.1 Test Site Location.....                               | 8         |
| 6.2 E-Field Probe .....                                   | 9         |
| 6.3 Data Acquisition Electronics (DAE) .....              | 9         |
| 6.4 Phantom.....                                          | 10        |
| 6.5 Device Holder.....                                    | 11        |
| <b>7. Measurement Procedures .....</b>                    | <b>12</b> |
| 7.1 Spatial Peak SAR Evaluation.....                      | 12        |
| 7.2 Power Reference Measurement.....                      | 13        |
| 7.3 Area Scan .....                                       | 13        |
| 7.4 Zoom Scan.....                                        | 14        |
| 7.5 Volume Scan Procedures.....                           | 14        |
| 7.6 Power Drift Monitoring.....                           | 14        |
| <b>8. Test Equipment List.....</b>                        | <b>15</b> |
| <b>9. System Verification .....</b>                       | <b>16</b> |
| 9.1 Tissue Verification .....                             | 16        |
| 9.2 System Performance Check Results.....                 | 16        |
| <b>10. WiFi/Bluetooth Output Power (Unit: dBm) .....</b>  | <b>17</b> |
| <b>11. SAR Test Results .....</b>                         | <b>22</b> |
| 11.1 Body SAR.....                                        | 23        |
| <b>12. Simultaneous Transmission Analysis .....</b>       | <b>25</b> |
| 12.1 Body Exposure Conditions .....                       | 25        |
| <b>13. Uncertainty Assessment .....</b>                   | <b>26</b> |
| <b>14. References.....</b>                                | <b>26</b> |
| <b>Appendix A. Plots of System Performance Check</b>      |           |
| <b>Appendix B. Plots of High SAR Measurement</b>          |           |
| <b>Appendix C. DASY Calibration Certificate</b>           |           |
| <b>Appendix D. Test Setup Photos and Antenna Location</b> |           |

## History of this test report

| Report No.  | Version | Description             | Issued Date   |
|-------------|---------|-------------------------|---------------|
| FA1D2309-04 | 01      | Initial issue of report | Feb. 14, 2022 |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |

## **1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for Realtek Semiconductor Corp., 802.11a/b/g/n/ac RTL8822CE Combo module, RTL8822CE, are as follows.

| Equipment Class  | Frequency Band |             | Highest SAR Summary | Highest Simultaneous Transmission<br>1g SAR (W/kg) |
|------------------|----------------|-------------|---------------------|----------------------------------------------------|
|                  |                |             | Body                |                                                    |
|                  |                |             | 1g SAR (W/kg)       |                                                    |
| DTS              | WLAN           | 2.4GHz WLAN | 0.39                | 0.78                                               |
| NII              |                | 5GHz WLAN   | 0.70                | 1.37                                               |
| DSS              | 2.4GHz Band    | Bluetooth   | 0.09                | 0.77                                               |
| Date of Testing: |                |             | 2022/1/23           |                                                    |

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3786) and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

**Reviewed by: Jason Wang**

**Report Producer: Carlie Tsai**

## **2. Guidance Applied**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02

### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

| Product Feature & Specification                                                                                                                                           |                                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment Name                                                                                                                                                            | 802.11a/b/g/n/ac RTL8822CE Combo module                                                                                                                                                                                                              |
| Brand Name                                                                                                                                                                | Realtek                                                                                                                                                                                                                                              |
| Model Name                                                                                                                                                                | RTL8822CE                                                                                                                                                                                                                                            |
| FCC ID                                                                                                                                                                    | TX2-RTL8822CE                                                                                                                                                                                                                                        |
| Wireless Technology and Frequency Range                                                                                                                                   | WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz<br>WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz<br>WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz<br>WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz<br>WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz<br>Bluetooth: 2400 MHz ~ 2483.5 MHz |
| Mode                                                                                                                                                                      | WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80<br>Bluetooth BR/EDR/LE                                                                                                                                                                            |
| <b>Remark:</b><br>1. There are four kind samples as below, Selected Sample 1 as the main testing and Sample 2, 3 and 4 will select worst case found in Sample 1 performs. |                                                                                                                                                                                                                                                      |

| Host Information |                                                                                                                                  |
|------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Equipment Name   | Notebook Computer                                                                                                                |
| Brand Name       | Lenovo                                                                                                                           |
| Model Name       | ThinkBook 15 G4 ABA*****(*=0~9 · A~Z, a~z, " " or blank, for marketing use only, with no impact on RF compliance of the product) |
| Marketing Name   | ThinkBook 15 G4 ABA                                                                                                              |
| EUT Stage        | Identical Prototype                                                                                                              |

| Sample   | Vendor    | Material |
|----------|-----------|----------|
| Sample 1 | HTK       | Metal    |
| Sample 2 | Southstar | Metal    |
| Sample 3 | HTK       | Plastic  |
| Sample 4 | Southstar | Plastic  |

| Antenna Information         |                                        |                                       |                             |                   |                                        |                                       |                         |
|-----------------------------|----------------------------------------|---------------------------------------|-----------------------------|-------------------|----------------------------------------|---------------------------------------|-------------------------|
| Sample with Cover : Metal   |                                        |                                       |                             |                   |                                        |                                       |                         |
| Ant. Type                   | PIFA                                   | connector                             | SpeedTeh<br>C87P115-00002-H | Ant. Type         | PIFA                                   | connector                             | MHF-B13-N-01            |
| Model No.                   | Main:<br>DC33002O300<br>(0ACCN021026N) | Aux:<br>DC33002O310<br>(0ACCN021027N) |                             | Model No.         | Main:<br>DC33002O200<br>(N12-7953-R0A) | Aux:<br>DC33002O210<br>(N12-7954-R0A) |                         |
| 1 Peak Gain (dBi)           |                                        |                                       |                             | 2 Peak Gain (dBi) |                                        |                                       |                         |
| 2400~2483.5MHz              | Main: -1.5<br>Aux: -0.62               | 5470~5725MHz                          | Main: -1.4<br>Aux: -0.81    | 2400~2483.5MHz    | Main: 1.03<br>Aux: 0.66                | 5470~5725MHz                          | Main: 2.34<br>Aux: 2.29 |
| 5150~5250MHz                | Main: -1.58<br>Aux: -1.72              | 5725~5850MHz                          | Main: -1.4<br>Aux: -0.81    | 5150~5250MHz      | Main: 2.35<br>Aux: 2.05                | 5725~5850MHz                          | Main: 2.56<br>Aux: 2.29 |
| 5250~5350MHz                | Main: -1.59<br>Aux: -1.72              |                                       |                             | 5250~5350MHz      | Main: 2.35<br>Aux: 2.05                |                                       |                         |
| Sample with Cover : Plastic |                                        |                                       |                             |                   |                                        |                                       |                         |
| Ant. Type                   | PIFA                                   | connector                             | SpeedTeh<br>C87P115-00002-H | Ant. Type         | PIFA                                   | connector                             | MHF-B13-N-01            |
| Model No.                   | Main:<br>DC33002O300<br>(0ACCN021026N) | Aux:<br>DC33002O310<br>(0ACCN021027N) |                             | Model No.         | Main:<br>DC33002O200<br>(N12-7953-R0A) | Aux:<br>DC33002O210<br>(N12-7954-R0A) |                         |
| 1 Peak Gain (dBi)           |                                        |                                       |                             | 2 Peak Gain (dBi) |                                        |                                       |                         |
| 2400~2483.5MHz              | Main: -1<br>Aux: -1.09                 | 5470~5725MHz                          | Main: -1.38<br>Aux: -0.42   | 2400~2483.5MHz    | Main: 1.32<br>Aux: 0.92                | 5470~5725MHz                          | Main: 2.55<br>Aux: 2.37 |
| 5150~5250MHz                | Main: -1.69<br>Aux: -1.73              | 5725~5850MHz                          | Main: -1.52<br>Aux: -0.06   | 5150~5250MHz      | Main: 2.38<br>Aux: 2.42                | 5725~5850MHz                          | Main: 2.8<br>Aux: 2.35  |
| 5250~5350MHz                | Main: -1.19<br>Aux: -1.71              |                                       |                             | 5250~5350MHz      | Main: 2.38<br>Aux: 2.42                |                                       |                         |

## **4. RF Exposure Limits**

### **4.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### **4.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.4        | 8.0          | 20.0                           |

**Limits for General Population/Uncontrolled Exposure (W/kg)**

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.08       | 1.6          | 4.0                            |

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.



## 6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### <ES3DV3 Probe>

|                      |                                                                                                                                                                                  |                                                                                    |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetric design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz – 4 GHz;<br>Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)                                                                                                                      |                                                                                    |
| <b>Directivity</b>   | $\pm 0.2$ dB in TSL (rotation around probe axis)<br>$\pm 0.3$ dB in TSL (rotation normal to probe axis)                                                                          |                                                                                    |
| <b>Dynamic Range</b> | 5 $\mu$ W/g – >100 mW/g;<br>Linearity: $\pm 0.2$ dB                                                                                                                              |                                                                                    |
| <b>Dimensions</b>    | Overall length: 337 mm (tip: 20 mm)<br>Tip diameter: 3.9 mm (body: 12 mm)<br>Distance from probe tip to dipole centers: 3.0 mm                                                   |                                                                                    |


### <EX3DV4 Probe>

|                      |                                                                                                                                                           |                                                                                     |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetric design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz – >6 GHz<br>Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)                                                                                               |                                                                                     |
| <b>Directivity</b>   | $\pm 0.3$ dB in TSL (rotation around probe axis)<br>$\pm 0.5$ dB in TSL (rotation normal to probe axis)                                                   |                                                                                     |
| <b>Dynamic Range</b> | 10 $\mu$ W/g – >100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)                                                                       |                                                                                     |
| <b>Dimensions</b>    | Overall length: 337 mm (tip: 20 mm)<br>Tip diameter: 2.5 mm (body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                      |                                                                                     |

## 6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

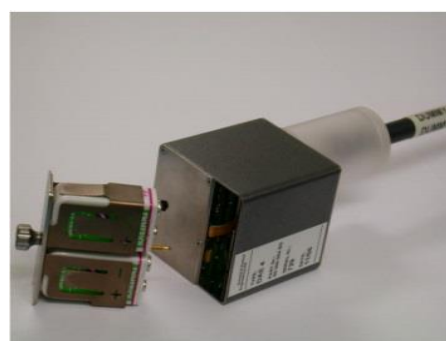

**Fig 5.1 Photo of DAE**

## 6.4 Phantom

### <SAM Twin Phantom>

|                          |                                                         |                                                                                    |
|--------------------------|---------------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Shell Thickness</b>   | 2 ± 0.2 mm;<br>Center ear point: 6 ± 0.2 mm             |  |
| <b>Filling Volume</b>    | Approx. 25 liters                                       |                                                                                    |
| <b>Dimensions</b>        | Length: 1000 mm; Width: 500 mm; Height: adjustable feet |                                                                                    |
| <b>Measurement Areas</b> | Left Hand, Right Hand, Flat Phantom                     |                                                                                    |

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

### <ELI Phantom>

|                        |                                                  |                                                                                     |
|------------------------|--------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Shell Thickness</b> | 2 ± 0.2 mm (sagging: <1%)                        |  |
| <b>Filling Volume</b>  | Approx. 30 liters                                |                                                                                     |
| <b>Dimensions</b>      | Major ellipse axis: 600 mm<br>Minor axis: 400 mm |                                                                                     |

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

## **7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## **7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

|                                                                                                        | $\leq 3$ GHz                                                                                                                                                                                                                                                           | $> 3$ GHz                                              |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | $5 \pm 1$ mm                                                                                                                                                                                                                                                           | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm     |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | $30^\circ \pm 1^\circ$                                                                                                                                                                                                                                                 | $20^\circ \pm 1^\circ$                                 |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                            | $\leq 2$ GHz: $\leq 15$ mm<br>$2 - 3$ GHz: $\leq 12$ mm                                                                                                                                                                                                                | $3 - 4$ GHz: $\leq 12$ mm<br>$4 - 6$ GHz: $\leq 10$ mm |
|                                                                                                        | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                        |

## 7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

|                                                                                                                                                                                                                                                                                                             |                                           |                                                                                             | $\leq 3$ GHz                                           | $> 3$ GHz                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$                                                                                                                                                                                                                      |                                           |                                                                                             | $\leq 2$ GHz: $\leq 8$ mm<br>$2 - 3$ GHz: $\leq 5$ mm* | $3 - 4$ GHz: $\leq 5$ mm*<br>$4 - 6$ GHz: $\leq 4$ mm*                              |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                                                             | uniform grid: $\Delta z_{\text{Zoom}}(n)$ |                                                                                             | $\leq 5$ mm                                            | $3 - 4$ GHz: $\leq 4$ mm<br>$4 - 5$ GHz: $\leq 3$ mm<br>$5 - 6$ GHz: $\leq 2$ mm    |
|                                                                                                                                                                                                                                                                                                             | graded grid                               | $\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4$ mm                                            | $3 - 4$ GHz: $\leq 3$ mm<br>$4 - 5$ GHz: $\leq 2.5$ mm<br>$5 - 6$ GHz: $\leq 2$ mm  |
|                                                                                                                                                                                                                                                                                                             |                                           | $\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$           |                                                                                     |
| Minimum zoom scan volume                                                                                                                                                                                                                                                                                    | x, y, z                                   |                                                                                             | $\geq 30$ mm                                           | $3 - 4$ GHz: $\geq 28$ mm<br>$4 - 5$ GHz: $\geq 25$ mm<br>$5 - 6$ GHz: $\geq 22$ mm |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.                                                                                                                                                           |                                           |                                                                                             |                                                        |                                                                                     |
| * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                           |                                                                                             |                                                        |                                                                                     |

## 7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## 8. Test Equipment List

| Manufacturer  | Name of Equipment                         | Type/Model      | Serial Number | Calibration   |               |
|---------------|-------------------------------------------|-----------------|---------------|---------------|---------------|
|               |                                           |                 |               | Last Cal.     | Due Date      |
| SPEAG         | 2450MHz System Validation Kit             | D2450V2         | 736           | Aug. 17, 2021 | Aug. 17, 2022 |
| SPEAG         | 5GHz System Validation Kit <sup>(2)</sup> | D5GHzV2         | 1128          | Dec. 16, 2019 | Dec. 13, 2022 |
| SPEAG         | Data Acquisition Electronics              | DAE4            | 376           | Nov. 22, 2021 | Nov. 21, 2022 |
| SPEAG         | Dosimetric E-Field Probe                  | EX3DV4          | 7306          | Jul. 26, 2021 | Jul. 25, 2022 |
| RCPTWN        | Thermometer                               | HTC-1           | TM560-2       | Oct. 28, 2021 | Oct. 27, 2022 |
| R&S           | BT Base Station                           | CBT             | 100815        | Feb. 19, 2021 | Feb. 18, 2022 |
| SPEAG         | Device Holder                             | N/A             | N/A           | N/A           | N/A           |
| Anritsu       | Signal Generator                          | MG3710A         | 6201502524    | Oct. 24, 2021 | Oct. 23, 2022 |
| Keysight      | ENA Network Analyzer                      | E5071C          | MY46104758    | Sep. 07, 2021 | Sep. 06, 2022 |
| SPEAG         | Dielectric Probe Kit                      | DAK-3.5         | 1126          | Sep. 24, 2021 | Sep. 23, 2022 |
| LINE SEIKI    | Digital Thermometer                       | DTM3000-spezial | 2942          | Oct. 26, 2021 | Oct. 25, 2022 |
| Anritsu       | Power Meter                               | ML2495A         | 1419002       | Aug. 18, 2021 | Aug. 17, 2022 |
| Anritsu       | Power Sensor                              | MA2411B         | 1911176       | Aug. 18, 2021 | Aug. 17, 2022 |
| Anritsu       | Power Meter                               | ML2495A         | 1804003       | Oct. 09, 2021 | Oct. 08, 2022 |
| Anritsu       | Power Sensor                              | MA2411B         | 1726150       | Oct. 09, 2021 | Oct. 08, 2022 |
| Anritsu       | Spectrum Analyzer                         | MS2830A         | 6201396378    | Jul. 16, 2021 | Jul. 15, 2022 |
| Agilent       | Spectrum Analyzer                         | E4408B          | MY44211028    | Aug. 19, 2021 | Aug. 18, 2022 |
| Mini-Circuits | Power Amplifier                           | ZVE-8G+         | 6418          | Oct. 12, 2021 | Oct. 11, 2022 |
| Mini-Circuits | Power Amplifier                           | ZVE-8G+         | 479102029     | Sep. 06, 2021 | Sep. 05, 2022 |
| ATM           | Dual Directional Coupler                  | C122H-10        | P610410z-02   | Note 1        |               |
| Woken         | Attenuator 1                              | WK0602-XX       | N/A           | Note 1        |               |
| PE            | Attenuator 2                              | PE7005-10       | N/A           | Note 1        |               |
| PE            | Attenuator 3                              | PE7005- 3       | N/A           | Note 1        |               |

### General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

## 9. System Verification

### 9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing


#### <Tissue Dielectric Parameter Check Results>

| Frequency (MHz) | Liquid Temp. (°C) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) | Conductivity Target ( $\sigma$ ) | Permittivity Target ( $\epsilon_r$ ) | Delta ( $\sigma$ ) (%) | Delta ( $\epsilon_r$ ) (%) | Limit (%) | Date      |
|-----------------|-------------------|---------------------------|-------------------------------|----------------------------------|--------------------------------------|------------------------|----------------------------|-----------|-----------|
| 2450            | 22.6              | 1.824                     | 39.562                        | 1.80                             | 39.20                                | 1.33                   | 0.92                       | $\pm 5$   | 2022/1/23 |
| 5250            | 22.6              | 4.580                     | 36.649                        | 4.71                             | 35.95                                | -2.76                  | 1.94                       | $\pm 5$   | 2022/1/23 |
| 5600            | 22.6              | 4.928                     | 36.222                        | 5.07                             | 35.50                                | -2.80                  | 2.03                       | $\pm 5$   | 2022/1/23 |
| 5750            | 22.6              | 5.100                     | 36.059                        | 5.22                             | 35.35                                | -2.30                  | 2.01                       | $\pm 5$   | 2022/1/23 |

### 9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

| Test Site | Date      | Frequency (MHz) | Input Power (mW) | Dipole S/N        | Probe S/N       | DAE S/N    | Measured 1g SAR (W/kg) | Targeted 1g SAR (W/kg) | Normalized 1g SAR (W/kg) | Deviation (%) |
|-----------|-----------|-----------------|------------------|-------------------|-----------------|------------|------------------------|------------------------|--------------------------|---------------|
| SAR08     | 2022/1/23 | 2450            | 50               | D2450V2-736       | EX3DV4 - SN7306 | DAE4 Sn376 | 2.74                   | 54.20                  | 54.8                     | 1.11          |
| SAR08     | 2022/1/23 | 5250            | 100              | D5GHzV2-1128-5250 | EX3DV4 - SN7306 | DAE4 Sn376 | 8.37                   | 80.00                  | 83.7                     | 4.62          |
| SAR08     | 2022/1/23 | 5600            | 100              | D5GHzV2-1128-5600 | EX3DV4 - SN7306 | DAE4 Sn376 | 8.84                   | 82.40                  | 88.4                     | 7.28          |
| SAR08     | 2022/1/23 | 5750            | 100              | D5GHzV2-1128-5750 | EX3DV4 - SN7306 | DAE4 Sn376 | 7.88                   | 79.10                  | 78.8                     | -0.38         |

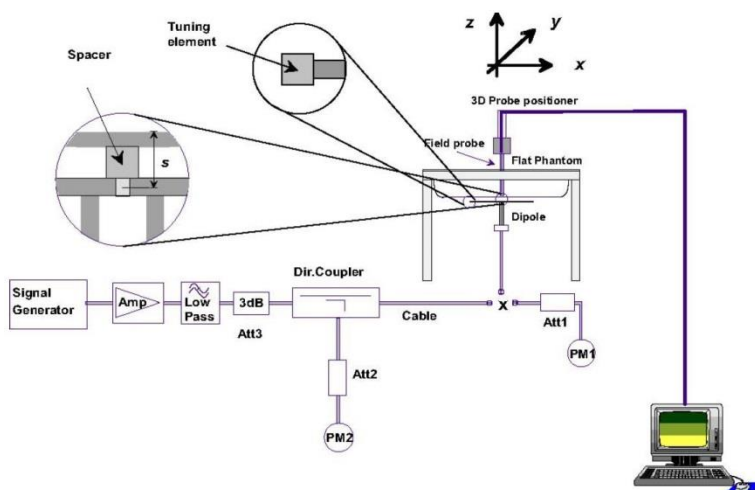

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## **10. WiFi/Bluetooth Output Power (Unit: dBm)**

### **General Note:**

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6\text{W/kg}$  and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
3. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4\text{ W/kg}$ , further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4\text{ W/kg}$ , SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8\text{ W/kg}$  or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8\text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.



**<2.4GHz WLAN>**

| 2.4GHz WLAN    |                     |         |                    | Ant 1                  |                  |                 | Ant 2                  |                  |                 | Ant 1+2                |                  |                 |
|----------------|---------------------|---------|--------------------|------------------------|------------------|-----------------|------------------------|------------------|-----------------|------------------------|------------------|-----------------|
| 2.4GHz<br>WLAN | Mode                | Channel | Frequency<br>(MHz) | Average<br>power (dBm) | Tune-Up<br>Limit | Duty Cycle<br>% | Average<br>power (dBm) | Tune-Up<br>Limit | Duty Cycle<br>% | Average<br>power (dBm) | Tune-Up<br>Limit | Duty Cycle<br>% |
|                | 802.11b 1Mbps       | 1       | 2412               | 17.90                  | 18.00            | 100.00          | 17.90                  | 18.00            | 100.00          | Not Required           | 18.00            | Not Required    |
|                |                     | 6       | 2437               | 18.90                  | 19.00            |                 | 18.80                  | 19.00            |                 |                        | 19.00            |                 |
|                |                     | 11      | 2462               | 17.80                  | 18.00            |                 | 18.00                  | 18.00            |                 |                        | 18.00            |                 |
|                |                     | 12      | 2467               | 12.80                  | 13.00            |                 | 12.80                  | 13.00            |                 |                        | 13.00            |                 |
|                |                     | 13      | 2472               | 11.80                  | 12.00            |                 | 11.80                  | 12.00            |                 |                        | 9.00             |                 |
|                | 802.11g 6Mbps       | 1       | 2412               | Not Required           | 13.00            | Not Required    | Not Required           | 13.00            | Not Required    |                        | 13.00            |                 |
|                |                     | 6       | 2437               |                        | 19.00            |                 |                        | 19.00            |                 |                        | 19.00            |                 |
|                |                     | 11      | 2462               |                        | 13.00            |                 |                        | 13.00            |                 |                        | 13.00            |                 |
|                |                     | 12      | 2467               |                        | 10.00            |                 |                        | 10.00            |                 |                        | 10.00            |                 |
|                |                     | 13      | 2472               |                        | 7.00             |                 |                        | 7.00             |                 |                        | 7.00             |                 |
|                | 802.11n-HT20 MCS0   | 1       | 2412               |                        | 13.00            |                 |                        | 13.00            |                 |                        | 13.00            |                 |
|                |                     | 6       | 2437               |                        | 19.00            |                 |                        | 19.00            |                 |                        | 19.00            |                 |
|                |                     | 11      | 2462               |                        | 13.00            |                 |                        | 13.00            |                 |                        | 13.00            |                 |
|                |                     | 12      | 2467               |                        | 10.00            |                 |                        | 10.00            |                 |                        | 10.00            |                 |
|                |                     | 13      | 2472               |                        | 7.00             |                 |                        | 7.00             |                 |                        | 7.00             |                 |
|                | 802.11n-HT40 MCS0   | 3       | 2422               |                        | 13.00            |                 |                        | 13.00            |                 |                        | 12.00            |                 |
|                |                     | 6       | 2437               |                        | 16.00            |                 |                        | 16.00            |                 |                        | 16.00            |                 |
|                |                     | 9       | 2452               |                        | 13.00            |                 |                        | 13.00            |                 |                        | 13.00            |                 |
|                |                     | 10      | 2457               |                        | 10.00            |                 |                        | 10.00            |                 |                        | 10.00            |                 |
|                |                     | 11      | 2462               |                        | 7.00             |                 |                        | 7.00             |                 |                        | 6.50             |                 |
|                | 802.11ac-VHT20 MCS0 | 1       | 2412               |                        | 13.00            |                 |                        | 13.00            |                 |                        | 13.00            |                 |
|                |                     | 6       | 2437               |                        | 19.00            |                 |                        | 19.00            |                 |                        | 19.00            |                 |
|                |                     | 11      | 2462               |                        | 13.00            |                 |                        | 13.00            |                 |                        | 13.00            |                 |
|                |                     | 12      | 2467               |                        | 10.00            |                 |                        | 10.00            |                 |                        | 10.00            |                 |
|                |                     | 13      | 2472               |                        | 7.00             |                 |                        | 7.00             |                 |                        | 7.00             |                 |
|                | 802.11ac-VHT40 MCS0 | 3       | 2422               |                        | 13.00            |                 |                        | 13.00            |                 |                        | 12.00            |                 |
|                |                     | 6       | 2437               |                        | 16.00            |                 |                        | 16.00            |                 |                        | 16.00            |                 |
| 9              |                     | 2452    | 13.00              |                        | 13.00            |                 |                        | 13.00            |                 |                        |                  |                 |
| 10             |                     | 2457    | 10.00              |                        | 10.00            |                 |                        | 10.00            |                 |                        |                  |                 |
| 11             |                     | 2462    | 7.00               |                        | 7.00             |                 |                        | 6.50             |                 |                        |                  |                 |



**<5GHz WLAN>**

| 5.2GHz WLAN |                     |         |                 | Ant 1               |               |              | Ant 2               |               |              | Ant 1+2             |               |              |
|-------------|---------------------|---------|-----------------|---------------------|---------------|--------------|---------------------|---------------|--------------|---------------------|---------------|--------------|
|             | Mode                | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % | Average power (dBm) | Tune-Up Limit | Duty Cycle % | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
| 5.2GHz WLAN | 802.11a 6Mbps       | 36      | 5180            | Not Required        | 15.00         | Not Required | Not Required        | 15.00         | Not Required | Not Required        | 15.00         | Not Required |
|             |                     | 40      | 5200            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 44      | 5220            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 48      | 5240            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11n-HT20 MCS0   | 36      | 5180            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 40      | 5200            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 44      | 5220            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 48      | 5240            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11n-HT40 MCS0   | 38      | 5190            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 46      | 5230            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11ac-VHT20 MCS0 | 36      | 5180            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 40      | 5200            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 44      | 5220            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 48      | 5240            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11ac-VHT40 MCS0 | 38      | 5190            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 46      | 5230            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11ac-VHT80 MCS0 | 42      | 5210            |                     | 15.00         |              |                     | 15.00         |              |                     | 13.50         |              |

| 5.3GHz WLAN |                     |         |                 | Ant 1               |               |              | Ant 2               |               |              | Ant 1+2             |               |              |
|-------------|---------------------|---------|-----------------|---------------------|---------------|--------------|---------------------|---------------|--------------|---------------------|---------------|--------------|
|             | Mode                | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % | Average power (dBm) | Tune-Up Limit | Duty Cycle % | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
| 5.3GHz WLAN | 802.11a 6Mbps       | 52      | 5260            | Not Required        | 15.00         | Not Required | Not Required        | 15.00         | Not Required | Not Required        | 15.00         | Not Required |
|             |                     | 56      | 5280            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 60      | 5300            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 64      | 5320            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11n-HT20 MCS0   | 52      | 5260            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 56      | 5280            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 60      | 5300            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 64      | 5320            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11n-HT40 MCS0   | 54      | 5270            |                     | 15.00         |              |                     | 15.00         |              |                     | 14.50         |              |
|             |                     | 62      | 5310            |                     | 15.00         |              |                     | 15.00         |              |                     | 14.50         |              |
|             | 802.11ac-VHT20 MCS0 | 52      | 5260            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 56      | 5280            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 60      | 5300            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 64      | 5320            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11ac-VHT40 MCS0 | 54      | 5270            |                     | 15.00         |              |                     | 15.00         |              |                     | 14.50         |              |
|             |                     | 62      | 5310            |                     | 15.00         |              |                     | 15.00         |              |                     | 14.50         |              |
|             | 802.11ac-VHT80 MCS0 | 58      | 5290            | 14.80               | 15.00         | 100.00       | 14.90               | 15.00         | 100.00       |                     | 13.00         |              |

| 5.5GHz WLAN |                     |         |                 | Ant 1               |               |              | Ant 2               |               |              | Ant 1+2             |               |              |
|-------------|---------------------|---------|-----------------|---------------------|---------------|--------------|---------------------|---------------|--------------|---------------------|---------------|--------------|
| 5.5GHz WLAN | Mode                | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % | Average power (dBm) | Tune-Up Limit | Duty Cycle % | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|             | 802.11a 6Mbps       | 100     | 5500            | Not Required        | 15.00         | Not Required | Not Required        | 15.00         | Not Required | Not Required        | 15.00         | Not Required |
|             |                     | 116     | 5580            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 124     | 5620            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 132     | 5660            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 144     | 5720            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11n-HT20 MCS0   | 100     | 5500            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 116     | 5580            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 124     | 5620            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 132     | 5660            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 144     | 5720            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11n-HT40 MCS0   | 102     | 5510            |                     | 15.00         |              |                     | 15.00         |              |                     | 13.50         |              |
|             |                     | 110     | 5550            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 126     | 5630            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 134     | 5670            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 142     | 5710            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11ac-VHT20 MCS0 | 100     | 5500            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 116     | 5580            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 124     | 5620            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 132     | 5660            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 144     | 5720            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11ac-VHT40 MCS0 | 102     | 5510            |                     | 15.00         |              |                     | 15.00         |              |                     | 13.50         |              |
|             |                     | 110     | 5550            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 126     | 5630            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 134     | 5670            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 142     | 5710            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11ac-VHT80 MCS0 | 106     | 5530            | 14.10               | 14.50         | 100.00       | 14.40               | 14.50         | 100.00       | 12.50               |               |              |
|             |                     | 122     | 5610            | 15.00               | 15.00         |              | 14.80               | 15.00         |              | 15.00               |               |              |
| 138         |                     | 5690    | 15.00           | 15.00               | 15.00         |              | 15.00               | 15.00         |              |                     |               |              |

| 5.8GHz WLAN |                     |         |                 | Ant 1               |               |              | Ant 2               |               |              | Ant 1+2             |               |              |
|-------------|---------------------|---------|-----------------|---------------------|---------------|--------------|---------------------|---------------|--------------|---------------------|---------------|--------------|
|             | Mode                | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % | Average power (dBm) | Tune-Up Limit | Duty Cycle % | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
| 5.8GHz WLAN | 802.11a 6Mbps       | 149     | 5745            | Not Required        | 15.00         | Not Required | Not Required        | 15.00         | Not Required | Not Required        | 15.00         | Not Required |
|             |                     | 157     | 5785            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 165     | 5825            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11n-HT20 MCS0   | 149     | 5745            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 157     | 5785            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 165     | 5825            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11n-HT40 MCS0   | 151     | 5755            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 159     | 5795            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11ac-VHT20 MCS0 | 149     | 5745            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 157     | 5785            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11ac-VHT40 MCS0 | 151     | 5755            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             |                     | 159     | 5795            |                     | 15.00         |              |                     | 15.00         |              |                     | 15.00         |              |
|             | 802.11ac-VHT80 MCS0 | 155     | 5775            | 15.00               | 15.00         | 100.00       | 15.00               | 15.00         | 100.00       |                     | 15.00         |              |


**<2.4GHz Bluetooth>**

| Mode          | Channel | Frequency (MHz) | Average power (dBm) |              |              |
|---------------|---------|-----------------|---------------------|--------------|--------------|
|               |         |                 | 1Mbps               | 2Mbps        | 3Mbps        |
| BR / EDR      | CH 00   | 2402            | 11.00               | Not Required | Not Required |
|               | CH 39   | 2441            | 10.60               |              |              |
|               | CH 78   | 2480            | 11.40               |              |              |
| Tune-up Limit |         |                 | 11.50               | 8.50         | 8.50         |

| Mode          | Channel | Frequency (MHz) | Average power (dBm) |              |
|---------------|---------|-----------------|---------------------|--------------|
|               |         |                 | 1Mbps               | 2Mbps        |
| LE            | CH 00   | 2402            | Not Required        | Not Required |
|               | CH 19   | 2440            |                     |              |
|               | CH 39   | 2480            |                     |              |
| Tune-up Limit |         |                 | 6.50                | 6.50         |

**General Note:**

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 100% considered in SAR testing.

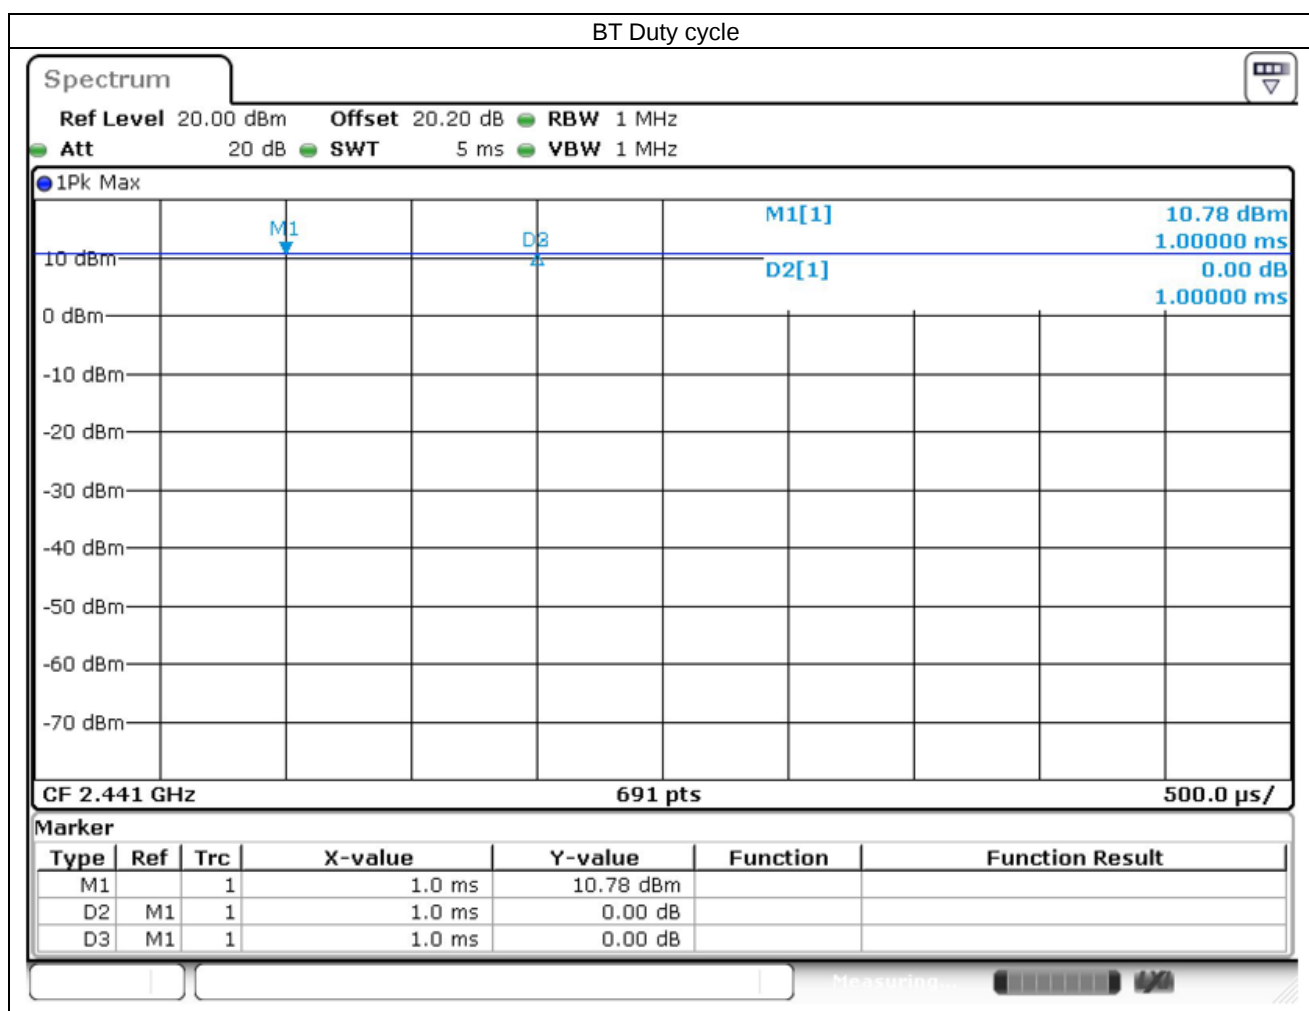

## **11. SAR Test Results**

### **General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.

### **WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for WLAN5.2GHz band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$ W/kg and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
8. Refer to tune-up procedure the channel 12 and 13 power is lower than others channel, therefore the SAR consideration is not necessary

**11.1 Body SAR****<WLAN SAR>**

| Plot No. | Band       | Mode          | Test Position    | Gap (mm) | Sample   | Antenna | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------|------------------|----------|----------|---------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 1 | Ant 1   | 6   | 2437        | 18.90               | 19.00               | 1.023                  | 100          | 1.000                     | -0.12            | 0.368                  | 0.377                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 1 | Ant 1   | 1   | 2412        | 17.90               | 18.00               | 1.023                  | 100          | 1.000                     | -0.15            | 0.350                  | 0.358                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 1 | Ant 1   | 11  | 2462        | 17.80               | 18.00               | 1.047                  | 100          | 1.000                     | 0.07             | 0.333                  | 0.349                  |
| 01       | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 2 | Ant 1   | 6   | 2437        | 18.90               | 19.00               | 1.023                  | 100          | 1.000                     | -0.19            | 0.381                  | 0.390                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 2 | Ant 1   | 1   | 2412        | 17.90               | 18.00               | 1.023                  | 100          | 1.000                     | -0.15            | 0.212                  | 0.217                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 2 | Ant 1   | 11  | 2462        | 17.80               | 18.00               | 1.047                  | 100          | 1.000                     | 0.07             | 0.264                  | 0.276                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 3 | Ant 1   | 6   | 2437        | 18.90               | 19.00               | 1.023                  | 100          | 1.000                     | 0.04             | 0.362                  | 0.370                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 4 | Ant 1   | 6   | 2437        | 18.90               | 19.00               | 1.023                  | 100          | 1.000                     | -0.05            | 0.355                  | 0.363                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 6   | 2437        | 18.80               | 19.00               | 1.047                  | 100          | 1.000                     | -0.16            | 0.366                  | 0.383                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 1   | 2412        | 17.90               | 18.00               | 1.023                  | 100          | 1.000                     | 0.11             | 0.319                  | 0.326                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 11  | 2462        | 18.00               | 18.00               | 1.000                  | 100          | 1.000                     | 0.01             | 0.283                  | 0.283                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 6   | 2437        | 18.80               | 19.00               | 1.047                  | 100          | 1.000                     | -0.1             | 0.368                  | 0.385                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 1   | 2412        | 17.90               | 18.00               | 1.023                  | 100          | 1.000                     | 0.11             | 0.359                  | 0.367                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 11  | 2462        | 18.00               | 18.00               | 1.000                  | 100          | 1.000                     | 0.01             | 0.354                  | 0.354                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 3 | Ant 2   | 6   | 2437        | 18.80               | 19.00               | 1.047                  | 100          | 1.000                     | 0.04             | 0.363                  | 0.380                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Bottom of Laptop | 0mm      | Sample 4 | Ant 2   | 6   | 2437        | 18.80               | 19.00               | 1.047                  | 100          | 1.000                     | -0.06            | 0.355                  | 0.372                  |



# FCC SAR TEST REPORT

Report No. : FA1D2309-04

| Plot No. | Band     | Mode                | Test Position    | Gap (mm) | Sample   | Antenna | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|----------|---------------------|------------------|----------|----------|---------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 1 | Ant 1   | 58  | 5290        | 14.80               | 15.00               | 1.047                  | 100          | 1.000                     | -0.17            | 0.235                  | 0.246                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 2 | Ant 1   | 58  | 5290        | 14.80               | 15.00               | 1.047                  | 100          | 1.000                     | -0.02            | 0.363                  | 0.380                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 3 | Ant 1   | 58  | 5290        | 14.80               | 15.00               | 1.047                  | 100          | 1.000                     | 0.06             | 0.354                  | 0.371                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 4 | Ant 1   | 58  | 5290        | 14.80               | 15.00               | 1.047                  | 100          | 1.000                     | -0.16            | 0.360                  | 0.377                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 58  | 5290        | 14.90               | 15.00               | 1.023                  | 100          | 1.000                     | -0.11            | 0.382                  | 0.391                  |
| 02       | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 58  | 5290        | 14.90               | 15.00               | 1.023                  | 100          | 1.000                     | 0.02             | 0.432                  | 0.442                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 3 | Ant 2   | 58  | 5290        | 14.90               | 15.00               | 1.023                  | 100          | 1.000                     | -0.16            | 0.405                  | 0.414                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 4 | Ant 2   | 58  | 5290        | 14.90               | 15.00               | 1.023                  | 100          | 1.000                     | 0.12             | 0.411                  | 0.421                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 1 | Ant 1   | 138 | 5690        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | 0.07             | 0.309                  | 0.309                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 1 | Ant 1   | 106 | 5530        | 14.10               | 14.50               | 1.096                  | 100          | 1.000                     | 0.03             | 0.251                  | 0.275                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 1 | Ant 1   | 122 | 5610        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | 0.16             | 0.319                  | 0.319                  |
| 03       | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 2 | Ant 1   | 122 | 5610        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.01            | 0.617                  | 0.617                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 2 | Ant 1   | 106 | 5530        | 14.10               | 14.50               | 1.096                  | 100          | 1.000                     | 0.03             | 0.502                  | 0.550                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 2 | Ant 1   | 138 | 5690        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | 0.07             | 0.564                  | 0.564                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 3 | Ant 1   | 122 | 5610        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.04            | 0.574                  | 0.574                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 3 | Ant 1   | 106 | 5530        | 14.10               | 14.50               | 1.096                  | 100          | 1.000                     | 0.06             | 0.471                  | 0.516                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 3 | Ant 1   | 138 | 5690        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | 0.14             | 0.541                  | 0.541                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 4 | Ant 1   | 122 | 5610        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.09            | 0.613                  | 0.613                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 4 | Ant 1   | 106 | 5530        | 14.10               | 14.50               | 1.096                  | 100          | 1.000                     | -0.08            | 0.488                  | 0.535                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 4 | Ant 1   | 138 | 5690        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.14            | 0.551                  | 0.551                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 138 | 5690        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.06            | 0.134                  | 0.134                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 106 | 5530        | 14.40               | 14.50               | 1.023                  | 100          | 1.000                     | 0.09             | 0.089                  | 0.091                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 122 | 5610        | 14.80               | 15.00               | 1.047                  | 100          | 1.000                     | -0.02            | 0.077                  | 0.081                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 138 | 5690        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.05            | 0.367                  | 0.367                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 106 | 5530        | 14.40               | 14.50               | 1.023                  | 100          | 1.000                     | 0.09             | 0.321                  | 0.328                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 122 | 5610        | 14.80               | 15.00               | 1.047                  | 100          | 1.000                     | -0.02            | 0.319                  | 0.334                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 3 | Ant 2   | 138 | 5690        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | 0.09             | 0.326                  | 0.326                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 3 | Ant 2   | 106 | 5530        | 14.40               | 14.50               | 1.023                  | 100          | 1.000                     | -0.04            | 0.274                  | 0.280                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 3 | Ant 2   | 122 | 5610        | 14.80               | 15.00               | 1.047                  | 100          | 1.000                     | 0.11             | 0.255                  | 0.267                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 4 | Ant 2   | 138 | 5690        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.02            | 0.365                  | 0.365                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 4 | Ant 2   | 106 | 5530        | 14.40               | 14.50               | 1.023                  | 100          | 1.000                     | 0.01             | 0.308                  | 0.315                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 4 | Ant 2   | 122 | 5610        | 14.80               | 15.00               | 1.047                  | 100          | 1.000                     | 0.14             | 0.288                  | 0.302                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 1 | Ant 1   | 155 | 5775        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | 0.01             | 0.287                  | 0.287                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 2 | Ant 1   | 155 | 5775        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | 0.07             | 0.673                  | 0.673                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 3 | Ant 1   | 155 | 5775        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | 0.01             | 0.633                  | 0.633                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 4 | Ant 1   | 155 | 5775        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.14            | 0.671                  | 0.671                  |
| 04       | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 155 | 5775        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.02            | 0.697                  | 0.697                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 155 | 5775        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.08            | 0.543                  | 0.543                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 3 | Ant 2   | 155 | 5775        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | -0.12            | 0.694                  | 0.694                  |
|          | WLAN5GHz | 802.11ac-VHT80 MCS0 | Bottom of Laptop | 0mm      | Sample 4 | Ant 2   | 155 | 5775        | 15.00               | 15.00               | 1.000                  | 100          | 1.000                     | 0.08             | 0.671                  | 0.671                  |

**<Bluetooth SAR>**

| Plot No. | Band      | Mode  | Test Position    | Gap (mm) | Sample   | Antenna | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-----------|-------|------------------|----------|----------|---------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | Bluetooth | 1Mbps | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 78  | 2480        | 11.40               | 11.50               | 1.023                  | 100          | 1.000                     | -0.15            | 0.083                  | 0.085                  |
|          | Bluetooth | 1Mbps | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 0   | 2402        | 11.00               | 11.50               | 1.122                  | 100          | 1.000                     | 0.03             | 0.056                  | 0.063                  |
|          | Bluetooth | 1Mbps | Bottom of Laptop | 0mm      | Sample 1 | Ant 2   | 39  | 2441        | 10.60               | 11.50               | 1.230                  | 100          | 1.000                     | -0.1             | 0.051                  | 0.063                  |
| 05       | Bluetooth | 1Mbps | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 78  | 2480        | 11.40               | 11.50               | 1.023                  | 100          | 1.000                     | -0.18            | 0.092                  | 0.094                  |
|          | Bluetooth | 1Mbps | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 0   | 2402        | 11.00               | 11.50               | 1.122                  | 100          | 1.000                     | 0.03             | 0.080                  | 0.090                  |
|          | Bluetooth | 1Mbps | Bottom of Laptop | 0mm      | Sample 2 | Ant 2   | 39  | 2441        | 10.60               | 11.50               | 1.230                  | 100          | 1.000                     | -0.1             | 0.075                  | 0.092                  |
|          | Bluetooth | 1Mbps | Bottom of Laptop | 0mm      | Sample 3 | Ant 2   | 78  | 2480        | 11.40               | 11.50               | 1.023                  | 100          | 1.000                     | 0.13             | 0.077                  | 0.079                  |
|          | Bluetooth | 1Mbps | Bottom of Laptop | 0mm      | Sample 4 | Ant 2   | 78  | 2480        | 11.40               | 11.50               | 1.023                  | 100          | 1.000                     | -0.1             | 0.081                  | 0.083                  |

**12. Simultaneous Transmission Analysis**

| NO. | Simultaneous Transmission Configurations | Body |
|-----|------------------------------------------|------|
| 1.  | 2.4GHz WLAN Ant 1 + 2.4GHz WLAN Ant 2    | Yes  |
| 2.  | 5GHz WLAN Ant 1 + 5GHz WLAN Ant 2        | Yes  |
| 3.  | 2.4GHz WLAN Ant 1 + Bluetooth Ant 2      | Yes  |
| 4.  | 5GHz WLAN Ant 1 + Bluetooth Ant 2        | Yes  |

**General Note:**

1. The Scaled SAR summation is calculated based on the same configuration and test position.
2. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

**12.1 Body Exposure Conditions**

| Exposure Position       | 1                                 | 2                                 | 3                               | 4                               | 5                                | 1+2 Summed 1g SAR (W/kg) | 3+4 Summed 1g SAR (W/kg) | 1+5 Summed 1g SAR (W/kg) | 3+5 Summed 1g SAR (W/kg) |
|-------------------------|-----------------------------------|-----------------------------------|---------------------------------|---------------------------------|----------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
|                         | WLAN2.4GHz Ant 1<br>1g SAR (W/kg) | WLAN2.4GHz Ant 2<br>1g SAR (W/kg) | WLAN5GHz Ant 1<br>1g SAR (W/kg) | WLAN5GHz Ant 2<br>1g SAR (W/kg) | Bluetooth Ant 2<br>1g SAR (W/kg) |                          |                          |                          |                          |
| Bottom of Laptop at 0mm | 0.390                             | 0.385                             | 0.673                           | 0.697                           | 0.094                            | 0.775                    | 1.370                    | 0.484                    | 0.767                    |

**Test Engineer :** EN Liu and Hank Chiang

### **13. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg and the measured 10-g SAR within a frequency band is  $< 3.75$  W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

### **14. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.