

FCC Radio Test Report

FCC ID: TX2-RTL8822CE

Report No. : BTL-FCCP-4-2109T062
Equipment : 802.11a/b/g/n/ac RTL8822CE Combo module
Model Name : RTL8822CE
Brand Name : Realtek
Applicant : Realtek Semiconductor Corp.
Address : No. 2, Innovation Road II, Hsinchu Science Part, Hsinchu 300, Taiwan

Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2a, U-NII 2c, U-NII 3)

FCC Rule Part(s) : FCC Part15, Subpart E (15.407)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2021/9/15
Date of Test : 2021/9/15 ~ 2021/11/5
Issued Date : 2022/1/14


The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by

: 
Jerry Chuang, Supervisor



Approved by

: 
Peter Chen, Vice Manager

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	TEST FACILITY	6
1.2	MEASUREMENT UNCERTAINTY	6
1.3	TEST ENVIRONMENT CONDITIONS	6
1.4	TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2	GENERAL INFORMATION	8
2.1	DESCRIPTION OF EUT	8
2.2	TEST MODES	11
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4	SUPPORT UNITS	12
3	AC POWER LINE CONDUCTED EMISSIONS TEST	13
3.1	LIMIT	13
3.2	TEST PROCEDURE	13
3.3	DEVIATION FROM TEST STANDARD	13
3.4	TEST SETUP	14
3.5	TEST RESULT	14
4	RADIATED EMISSIONS TEST	15
4.1	LIMIT	15
4.2	TEST PROCEDURE	16
4.3	DEVIATION FROM TEST STANDARD	16
4.4	TEST SETUP	17
4.5	EUT OPERATING CONDITIONS	18
4.6	TEST RESULT – BELOW 30 MHZ	18
4.7	TEST RESULT – 30 MHZ TO 1 GHZ	18
4.8	TEST RESULT – ABOVE 1 GHZ	18
5	OUTPUT POWER TEST	19
5.1	LIMIT	19
5.2	TEST PROCEDURE	19
5.3	DEVIATION FROM TEST STANDARD	19
5.4	TEST SETUP	19
5.5	EUT OPERATING CONDITIONS	19
5.6	TEST RESULT	19
6	LIST OF MEASURING EQUIPMENTS	20
7	EUT TEST PHOTO	21
8	EUT PHOTOS	21
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	22
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	27
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	30
APPENDIX D	OUTPUT POWER	144

REVISION HISTORY

Report No.	Version	Description	Issued Date
BTL-FCCP-4-2109T062	R00	Original Report.	2022/1/14

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

FCC Part 15, Subpart E (15.407)				
Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.407(a)	Output Power	APPENDIX D	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This test report is issued for the RF module (FCCID: TX2-RTL8822CE) to be incorporated to the host device (Model number: 81MC, Lenovo 500e Chromebook 2nd Genxxxxxx, Lenovo 300e Chromebook 2nd Genxxxxxx, 81MCxxxxxx, 81MBxxxxxx(The"x" in the model name can be 0 to 9, A to Z, a to z, "-" or blank), Product name: Notebook Computer).
Since the RF module has been certificated, after evaluation, above test items were criticized and reconfirmed in this report.
- (4) After spot check, this revision does not change original radio parameters.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

☒ C05 ☐ CB08 ☐ CB11 ☒ CB15 ☐ CB16
☒ SR05

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB15	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Output Power	0.3669

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	22 °C, 64 %	AC 120V	Paul Shen
Radiated emissions below 1 GHz	Refer to data	AC 120V	Jay Kao
Radiated emissions above 1 GHz	Refer to data	AC 120V	Jay Kao
Output Power	23.5 °C, 51 %	AC 120V	Tim Lian

1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

Test Software	CMD			
UNII-1				
Mode	5180 MHz	5200 MHz	5240 MHz	Data Rate
IEEE 802.11a	69/70	67/68	67/68	6 Mbps
IEEE 802.11n (HT20)	69/70	68/69	66/67	MCS 0
IEEE 802.11ac (VHT20)	69/70	68/69	66/67	MCS 0
Mode	5190 MHz	5230 MHz		Data Rate
IEEE 802.11n (HT40)	55/57	66/68		MCS 0
IEEE 802.11ac (VHT40)	55/57	66/68		MCS 0
Mode	5210 MHz			Data Rate
IEEE 802.11ac (VHT80)	51/52			MCS 0

UNII-2A				
Mode	5260 MHz	5300 MHz	5320 MHz	Data Rate
IEEE 802.11a	70/69	70/68	70/68	6 Mbps
IEEE 802.11n (HT20)	70/69	69/68	69/68	MCS 0
IEEE 802.11ac (VHT20)	70/69	69/68	69/68	MCS 0
Mode	5270 MHz	5310 MHz		Data Rate
IEEE 802.11n (HT40)	69/68	67/66		MCS 0
IEEE 802.11ac (VHT40)	69/68	67/66		MCS 0
Mode	5290 MHz			Data Rate
IEEE 802.11ac (VHT80)	60/60			MCS 0

UNII-2C					
Mode	5500 MHz	5580 MHz	5700 MHz	5720 MHz	Data Rate
IEEE 802.11a	65/65	62/61	61/61	61/60	6 Mbps
IEEE 802.11n (HT20)	65/64	63/62	63/62	63/62	MCS 0
IEEE 802.11ac (VHT20)	65/64	63/62	63/62	63/62	MCS 0
Mode	5510 MHz	5550 MHz	5670 MHz	5710 MHz	Data Rate
IEEE 802.11n (HT40)	52/51	61/60	62/61	62/61	MCS 0
IEEE 802.11ac (VHT40)	52/51	63/62	61/60	62/61	MCS 0
Mode	5530 MHz	5610 MHz	5690 MHz		Data Rate
IEEE 802.11ac (VHT80)	55/53	62/62	63/62		MCS 0

UNII-3				
Mode	5745 MHz	5785 MHz	5825 MHz	Data Rate
IEEE 802.11a	56/59	57/61	56/61	6 Mbps
IEEE 802.11n (HT20)	56/59	57/62	57/61	MCS 0
IEEE 802.11ac (VHT20)	63/62	57/62	57/61	MCS 0
Mode	5755 MHz	5795 MHz		Data Rate
IEEE 802.11n (HT40)	57/61	44/47		MCS 0
IEEE 802.11ac (VHT40)	57/61	44/47		MCS 0
Mode	5775 MHz			Data Rate
IEEE 802.11ac (VHT80)	39/43			MCS 0

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	802.11a/b/g/n/ac RTL8822CE Combo module
Model Name	RTL8822CE
Brand Name	Realtek
Model Difference	N/A
Power Supply Rating	DC 3.3V from host equipment
Host device information	
Equipment	Notebook Computer
Model Name	81MC, Lenovo 500e Chromebook 2nd Genxxxxxx, Lenovo 300e Chromebook 2nd Genxxxxxx, 81MCxxxxxx, 81MBxxxxxx(The"x" in the model name can be 0 to 9, A to Z, a to z, "-" or blank)
Brand Name	Lenovo
Model Difference	N/A
Power Source	#1 DC voltage supplied from AC/DC adapter. 1) Manufacturer / Model: Liteon / ADLX45YLC2D 2) Manufacturer / Model: Liteon / ADLX45YLC3D 3) Manufacturer / Model: Delta / ADLX45YDC2D 4) Manufacturer / Model: Delta / ADLX45YDC3D 5) Manufacturer / Model: Chicony / ADLX45YCC2D 6) Manufacturer / Model: Chicony / ADLX45YCC3D 7) Manufacturer / Model: Acbel / ADLX45YAC3D 8) Manufacturer / Model: Acbel / ADLX45YAC2D #2 Rechargeable Li-ion Battery supplied. 1) Manufacturer / Model: Simplo / L17M3PB0 2) Manufacturer / Model: LGC / L17L3PB0 3) Manufacturer / Model: Sunwoda / L18D3PG1
Power Rating	#1 For adapter: I/P: 100-240V~1.2A/1.3A 50-60Hz O/P: 20V---2.25A/15V---3A/9V---2A/5V---2A #2 For battery: 1) 11.25V---3.735Ah / 42Wh 2) 11.4V--- TYP 3685mAh / 42Wh MIN 3575mAh / 41Wh 3) 11.25V--- TYP 3735mAh / 42Wh MIN 3635mAh / 41Wh
Products Covered	Please refer to Power Source.
WIFI+BT Module	Realtek / RTL8822CE
Operation Band	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Operation Frequency	UNII-1: 5180 MHz ~ 5240 MHz UNII-2A: 5260 MHz ~ 5320 MHz UNII-2C: 5500 MHz ~ 5720 MHz UNII-3: 5745 MHz ~ 5825 MHz
Maximum Output Power for UNII-1	IEEE 802.11a: 15.91 dBm (0.0390 W) IEEE 802.11n (HT20): 15.87 dBm (0.0386 W) IEEE 802.11n (HT40): 15.44 dBm (0.0350 W) IEEE 802.11ac (VHT20): 15.93 dBm (0.0391 W) IEEE 802.11ac (VHT40): 15.47 dBm (0.0352 W) IEEE 802.11ac (VHT80): 11.35 dBm (0.0136 W)

Maximum Output Power for UNII-2A	IEEE 802.11a: 15.90 dBm (0.0389 W) IEEE 802.11n (HT20): 15.93 dBm (0.0392 W) IEEE 802.11n (HT40): 15.41 dBm (0.0347 W) IEEE 802.11ac (VHT20): 15.95 dBm (0.0394 W) IEEE 802.11ac (VHT40): 15.46 dBm (0.0352 W) IEEE 802.11ac (VHT80): 12.94 dBm (0.0197 W)
Maximum Output Power for UNII-2C	IEEE 802.11a: 15.78 dBm (0.0378 W) IEEE 802.11n (HT20): 15.93 dBm (0.0391 W) IEEE 802.11n (HT40): 15.41 dBm (0.0348 W) IEEE 802.11ac (VHT20): 15.95 dBm (0.0394 W) IEEE 802.11ac (VHT40): 15.47 dBm (0.0352 W) IEEE 802.11ac (VHT80): 15.44 dBm (0.0350 W)
Maximum Output Power for UNII-3	IEEE 802.11a: 15.88 dBm (0.0387 W) IEEE 802.11n (HT20): 15.89 dBm (0.0388 W) IEEE 802.11n (HT40): 15.40 dBm (0.0347 W) IEEE 802.11ac (VHT20): 15.93 dBm (0.0392 W) IEEE 802.11ac (VHT40): 15.43 dBm (0.0349 W) IEEE 802.11ac (VHT80): 10.91 dBm (0.0123 W)
Maximum Output Power for Straddle Channel	IEEE 802.11a: 12.04 dBm (0.0160 W) IEEE 802.11n (HT20): 14.53 dBm (0.0284 W) IEEE 802.11n (HT40): 12.43 dBm (0.0175 W) IEEE 802.11ac (VHT20): 12.53 dBm (0.0179 W) IEEE 802.11ac (VHT40): 12.46 dBm (0.0176 W) IEEE 802.11ac (VHT80): 12.38 dBm (0.0173 W)
Test Model	Lenovo 500e Chromebook 2nd Gen
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

(1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

(2) Channel List:

UNII-1					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

UNII-3					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

(3) Table for Filed Antenna:

Antenna	Manufacture	Part Number	Type	Connector	Frequency Range (MHz)	Gain (dBi)
Main	South Star	N12-4457-R0A	PIFA	I-PEX	2400-2500	-0.69
					5150-5350	-0.44
					5450-5650	0.31
					5750-5850	-0.01
Aux	South Star	N12-4456-R0A	PIFA	I-PEX	2400-2500	-1.01
					5150-5350	-0.46
					5450-5650	0.24
					5750-5850	1.45

Antenna	Manufacture	Part Number	Type	Connector	Frequency Range (MHz)	Gain (dBi)
Main	INPAQ	WA-F-LB-02-166	PIFA	I-PEX	2400-2500	0.92
					5150-5350	0.14
					5470-5725	0.91
					5785-5850	1.03
Aux	INPAQ	WA-F-LB-01-065	PIFA	I-PEX	2400-2500	0.17
					5150-5350	-0.03
					5470-5725	-0.7
					5785-5850	0.29

NOTE: Antenna gain higher is used for testing.

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11a	52	-
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11a	36/48 52/64	Bandedge
	IEEE 802.11ac (VHT20)	100/140 149/165	
	IEEE 802.11ac (VHT40)	38/46 54/62 102/134 151/159	
	IEEE 802.11ac (VHT80)	42 58 106/122 155	
	IEEE 802.11a	36/40/48 52/60/64	Harmonic
	IEEE 802.11ac (VHT20)	100/116/140/144 149/157/165	
	IEEE 802.11ac (VHT40)	38/46/54/62 102/110/134/142 151/159	
	IEEE 802.11ac (VHT80)	42/58 106/122/138 155	
Output Power	IEEE 802.11a	36/40/48 52/60/64	-
	IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)	100/116/140/144 149/157/165	
	IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)	38/46/54/62 102/110/134/142 151/159	
	IEEE 802.11ac (VHT80)	42/58 106/122/138 155	


NOTE:

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.
- (3) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC Power Line Conducted Emissions Test

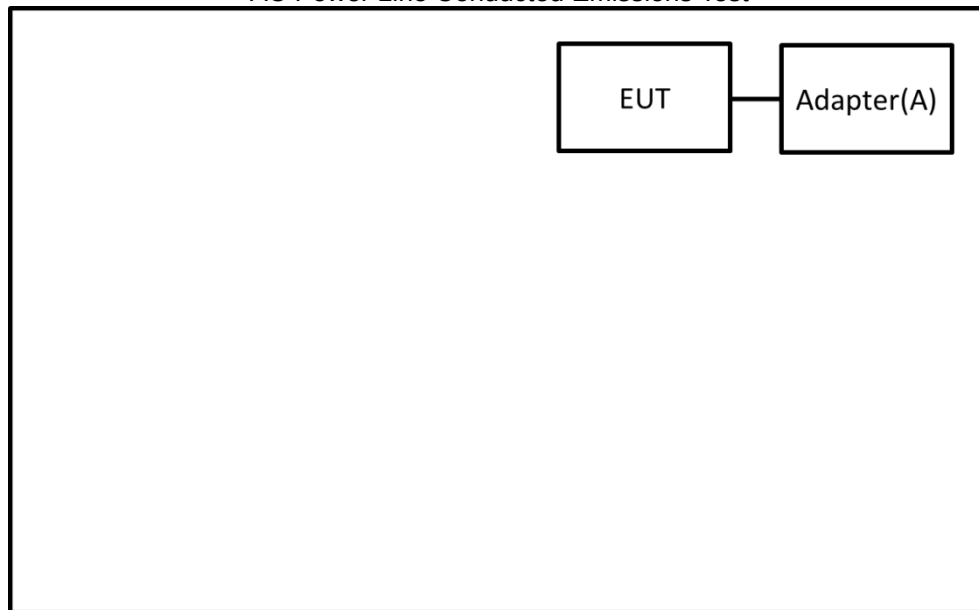

Radiated Emissions Test

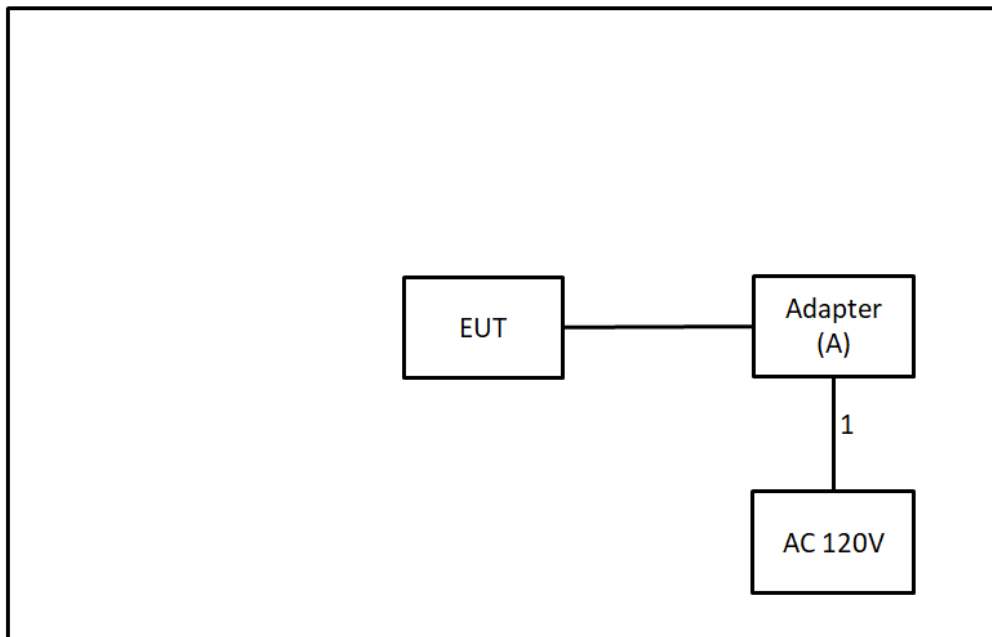

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	Lenovo	ADLX45YDC3D	N/A	Supplied by test requester.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	0.9m	Power Cord	Furnished by test lab.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)

Margin Level = Measurement Value – Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
All other support equipment were powered from an additional LISN(s).
The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
The end of the cable will be terminated, using the correct terminating impedance.
The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

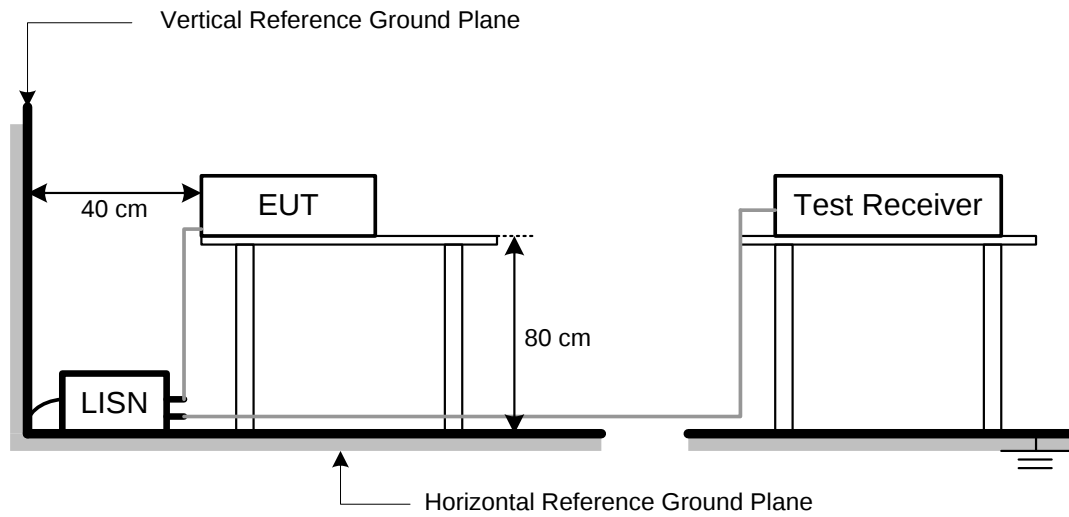

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
19.11	+	2.11	=	21.22

Measurement Value		Limit Value		Margin Level
21.22	-	68.3	=	-47.08

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

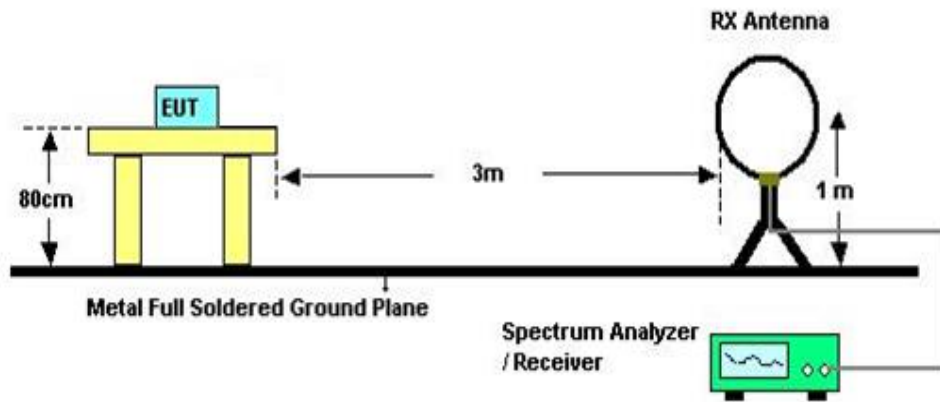

30 MHz to 1 GHz

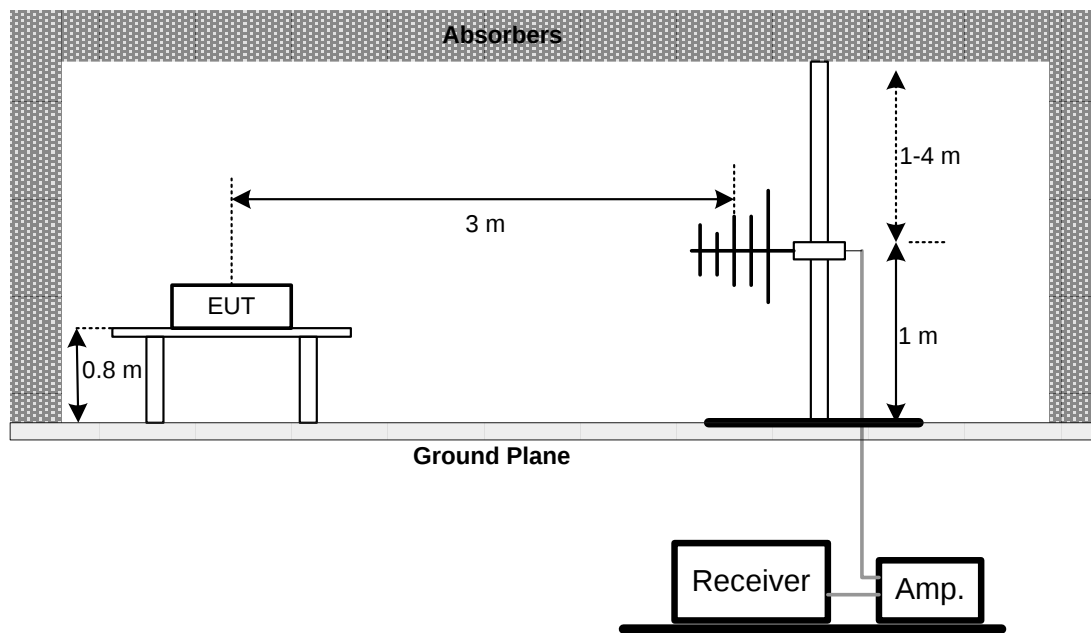

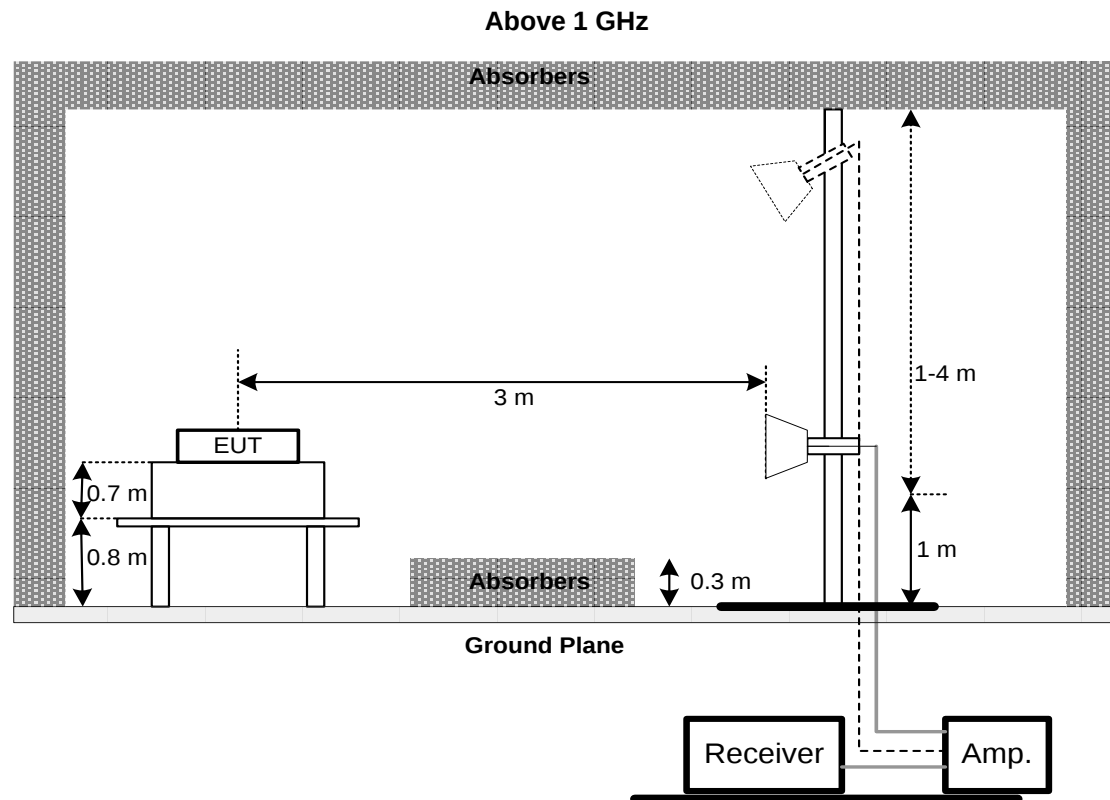

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

NOTE:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 OUTPUT POWER TEST

5.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	Fixed:1 Watt (30 dBm) Mobile and portable: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		1 Watt (30dBm)	5470-5725
			5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. The maximum peak conducted output power was performed in accordance with method of clause E. 3. a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - a)Method PM (Measurement using an RF average power meter):
 - (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
 - (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX D.

6 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101339	2021/3/10	2022/3/9
2	Test Cable	EMCI	EMCCFD300-BM-BMR-6000	170714	2021/6/7	2022/6/6
3	EMI Test Receiver	R&S	ESR 7	101433	2020/12/11	2021/12/10
4	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC02325	980217	2021/4/8	2022/4/7
2	Preamplifier	EMCI	EMC012645B	980222	2021/4/8	2022/4/7
3	Preamplifier	EMCI	EMC184045SE	980512	2021/5/28	2022/5/27
4	Preamplifier	EMCI	EMC001340	980555	2021/4/8	2022/4/7
5	Test Cable	EMCI	EMC104-SM-1000	180809	2021/4/8	2022/4/7
6	Test Cable	EMCI	EMC104-SM-SM-3000	151205	2021/4/8	2022/4/7
7	Test Cable	EMCI	EMC-SM-SM-7000	180408	2021/4/8	2022/4/7
8	MXE EMI Receiver	Agilent	N9038A	MY56400087	2021/5/27	2022/5/26
9	Signal Analyzer	Agilent	N9010A	MY56480554	2021/8/25	2022/8/24
10	Loop Ant	Electro-Metrics	EMCI-LPA600	274	2021/6/1	2022/5/31
11	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2021/6/2	2022/6/1
12	Horn Ant	Schwarzbeck	BBHA 9170	340	2021/7/9	2022/7/8
13	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-352	2021/8/11	2022/8/10
14	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0625	2021/8/11	2022/8/10
15	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Power Meter	Anritsu	ML2495A	1128008	2021/5/26	2022/5/25
2	Power Sensor	Anritsu	MA2411B	1126001	2021/5/26	2022/5/25

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

7 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2109T062-FCCP-1 (APPENDIX-TEST PHOTOS).

8 EUT PHOTOS

Please refer to document Appendix No.: EP-2109T062-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2021/11/5
Test Frequency	-	Phase	Line

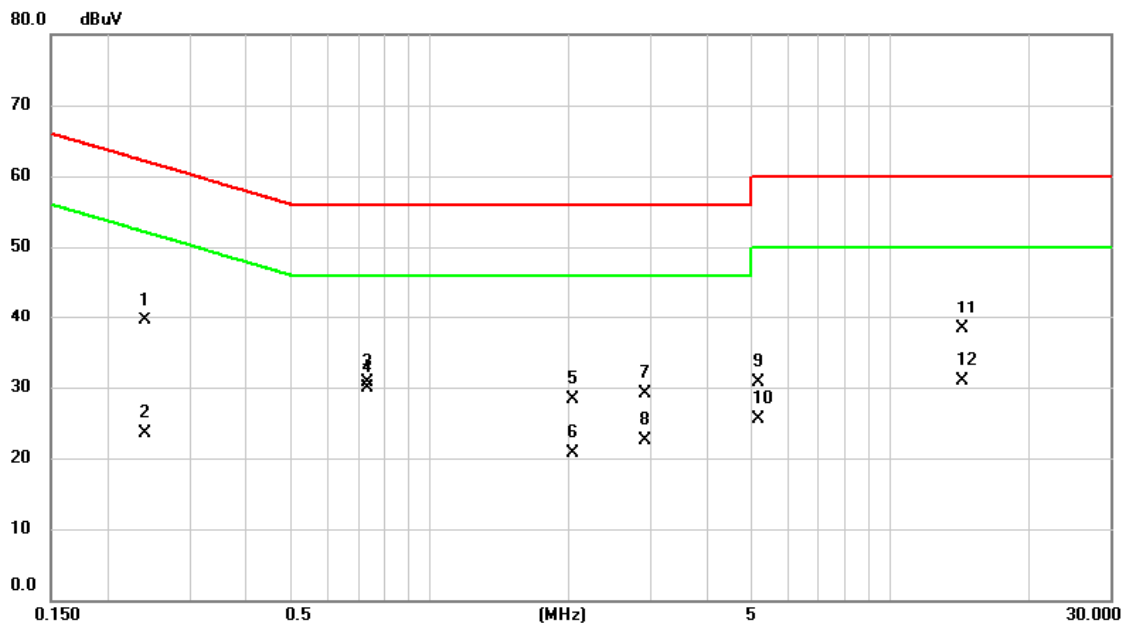


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2400	29.78	9.72	39.50	62.10	-22.60	QP	
2		0.2400	13.74	9.72	23.46	52.10	-28.64	AVG	
3		0.7350	21.03	9.73	30.76	56.00	-25.24	QP	
4	*	0.7350	20.09	9.73	29.82	46.00	-16.18	AVG	
5		2.0400	18.54	9.77	28.31	56.00	-27.69	QP	
6		2.0400	10.91	9.77	20.68	46.00	-25.32	AVG	
7		2.9265	19.40	9.80	29.20	56.00	-26.80	QP	
8		2.9265	12.79	9.80	22.59	46.00	-23.41	AVG	
9		5.1720	20.70	9.98	30.68	60.00	-29.32	QP	
10		5.1720	15.53	9.98	25.51	50.00	-24.49	AVG	
11		14.3183	28.05	10.17	38.22	60.00	-21.78	QP	
12		14.3183	20.72	10.17	30.89	50.00	-19.11	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2021/11/5
Test Frequency	-	Phase	Neutral

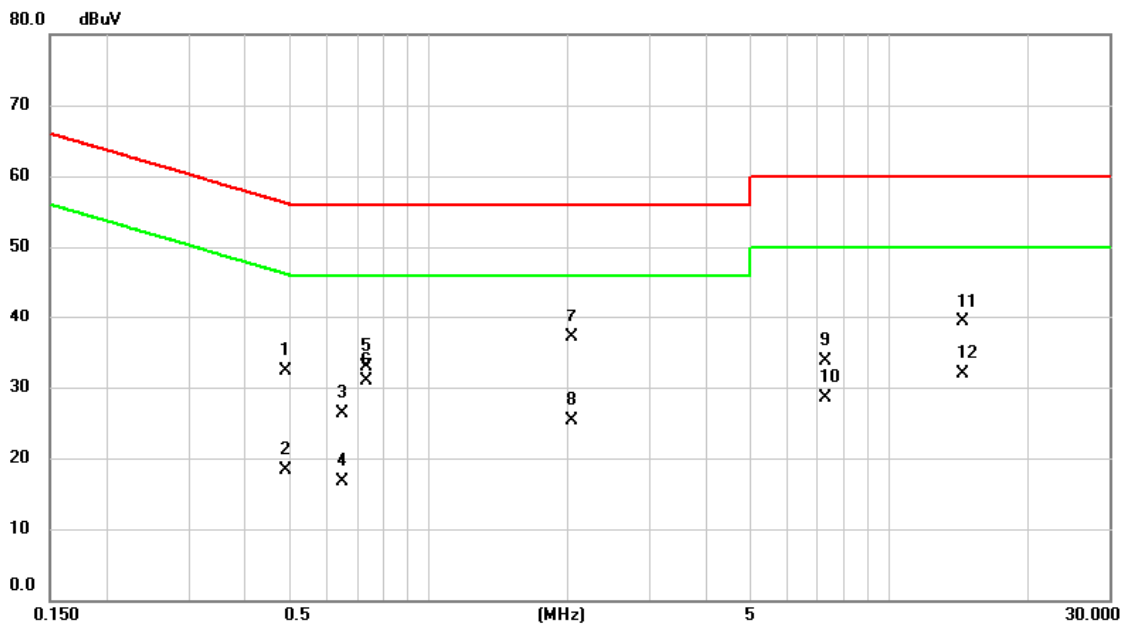


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4897	22.64	9.74	32.38	56.17	-23.79	QP	
2		0.4897	8.54	9.74	18.28	46.17	-27.89	AVG	
3		0.6495	16.56	9.74	26.30	56.00	-29.70	QP	
4		0.6495	6.93	9.74	16.67	46.00	-29.33	AVG	
5		0.7350	23.07	9.74	32.81	56.00	-23.19	QP	
6	*	0.7350	21.09	9.74	30.83	46.00	-15.17	AVG	
7		2.0400	27.39	9.78	37.17	56.00	-18.83	QP	
8		2.0400	15.60	9.78	25.38	46.00	-20.62	AVG	
9		7.2915	23.56	10.07	33.63	60.00	-26.37	QP	
10		7.2915	18.42	10.07	28.49	50.00	-21.51	AVG	
11		14.4555	29.16	10.24	39.40	60.00	-20.60	QP	
12		14.4555	21.63	10.24	31.87	50.00	-18.13	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/11/5
Test Frequency	-	Phase	Line

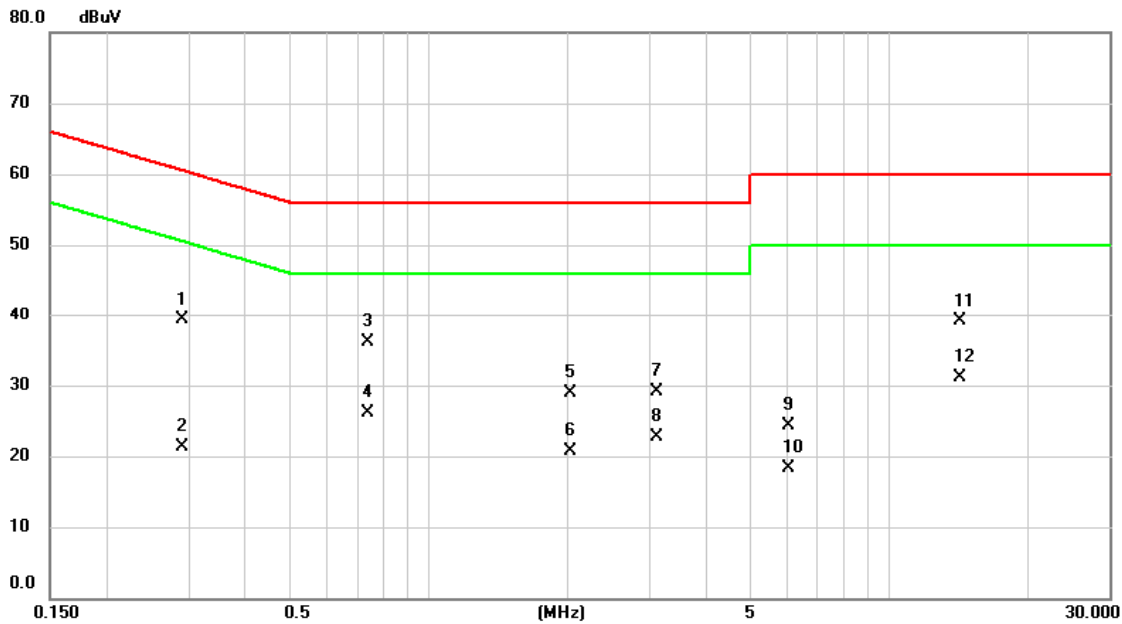


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2895	29.63	9.73	39.36	60.54	-21.18	QP	
2		0.2895	11.49	9.73	21.22	50.54	-29.32	AVG	
3		0.7395	26.43	9.73	36.16	56.00	-19.84	QP	
4		0.7395	16.33	9.73	26.06	46.00	-19.94	AVG	
5		2.0264	19.08	9.77	28.85	56.00	-27.15	QP	
6		2.0264	10.98	9.77	20.75	46.00	-25.25	AVG	
7		3.1268	19.31	9.82	29.13	56.00	-26.87	QP	
8		3.1268	12.79	9.82	22.61	46.00	-23.39	AVG	
9		6.0428	14.27	10.01	24.28	60.00	-35.72	QP	
10		6.0428	8.36	10.01	18.37	50.00	-31.63	AVG	
11		14.2350	28.98	10.17	39.15	60.00	-20.85	QP	
12	*	14.2350	20.93	10.17	31.10	50.00	-18.90	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/11/5
Test Frequency	-	Phase	Neutral

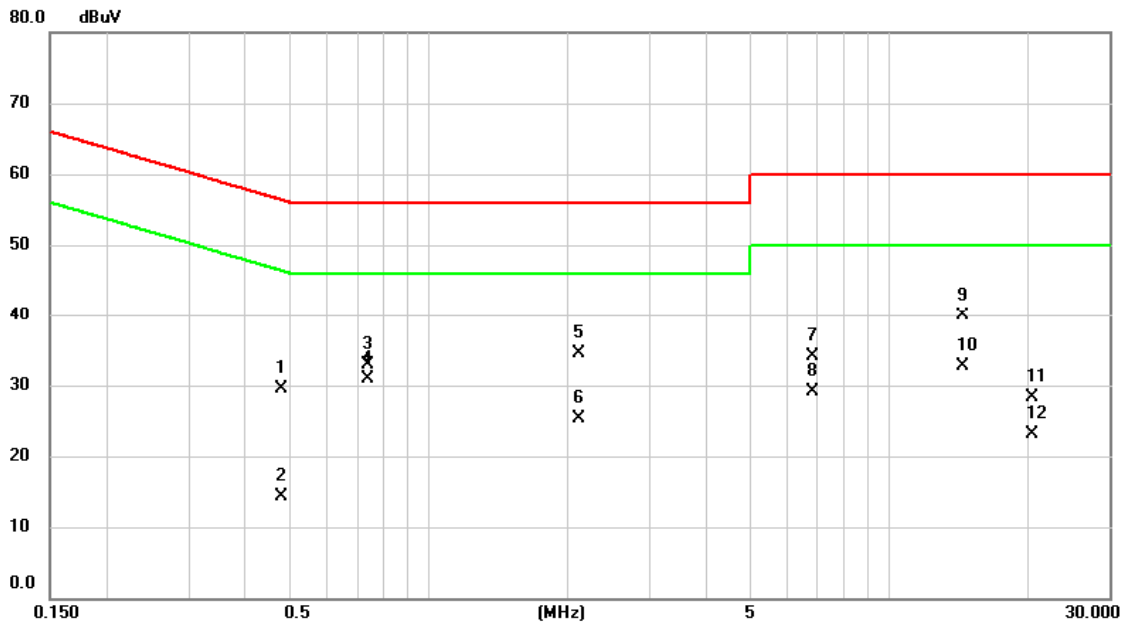

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4807	19.81	9.74	29.55	56.33	-26.78	QP	
2		0.4807	4.50	9.74	14.24	46.33	-32.09	AVG	
3		0.7372	23.09	9.74	32.83	56.00	-23.17	QP	
4	*	0.7372	21.23	9.74	30.97	46.00	-15.03	AVG	
5		2.1098	24.73	9.78	34.51	56.00	-21.49	QP	
6		2.1098	15.46	9.78	25.24	46.00	-20.76	AVG	
7		6.8438	24.14	10.05	34.19	60.00	-25.81	QP	
8		6.8438	18.97	10.05	29.02	50.00	-20.98	AVG	
9		14.3993	29.65	10.24	39.89	60.00	-20.11	QP	
10		14.3993	22.38	10.24	32.62	50.00	-17.38	AVG	
11		20.3550	17.85	10.36	28.21	60.00	-31.79	QP	
12		20.3550	12.72	10.36	23.08	50.00	-26.92	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5260MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

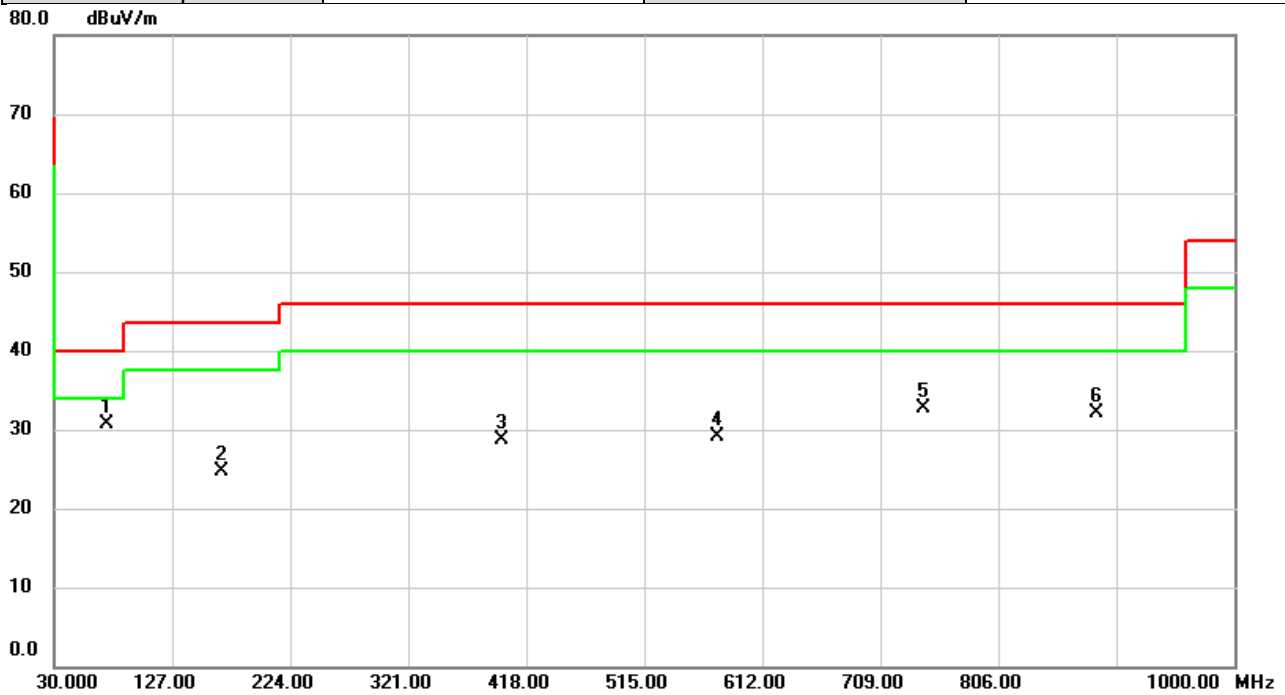


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	73.5207	42.48	-11.73	30.75	40.00	-9.25	peak	
2		167.5460	34.07	-9.30	24.77	43.50	-18.73	peak	
3		398.3413	34.59	-5.94	28.65	46.00	-17.35	peak	
4		575.3987	30.96	-1.84	29.12	46.00	-16.88	peak	
5		744.9547	31.33	1.33	32.66	46.00	-13.34	peak	
6		886.3807	28.95	3.23	32.18	46.00	-13.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

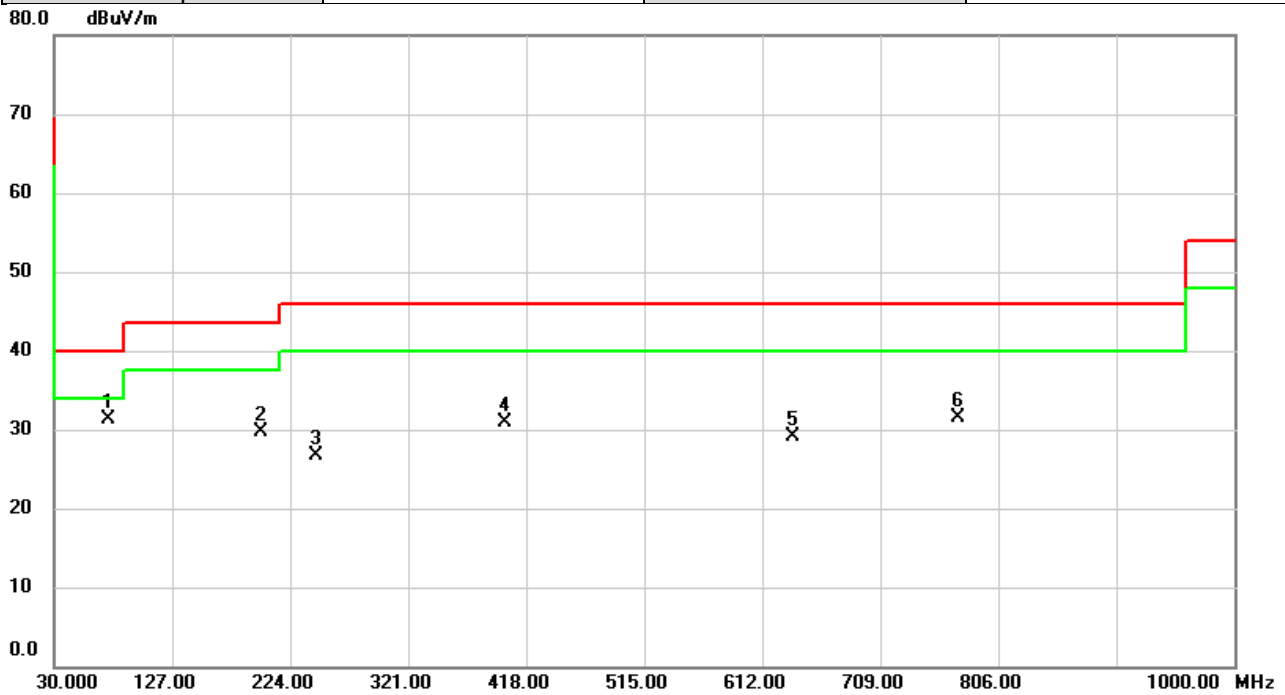


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	74.3936	43.24	-11.95	31.29	40.00	-8.71	peak	
2		200.4936	41.87	-12.12	29.75	43.50	-13.75	peak	
3		245.3076	37.33	-10.54	26.79	46.00	-19.21	peak	
4		399.9580	36.74	-5.90	30.84	46.00	-15.16	peak	
5		636.9290	29.68	-0.49	29.19	46.00	-16.81	peak	
6		772.6643	29.84	1.68	31.52	46.00	-14.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE802.11a	Test Date	2021/11/3
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

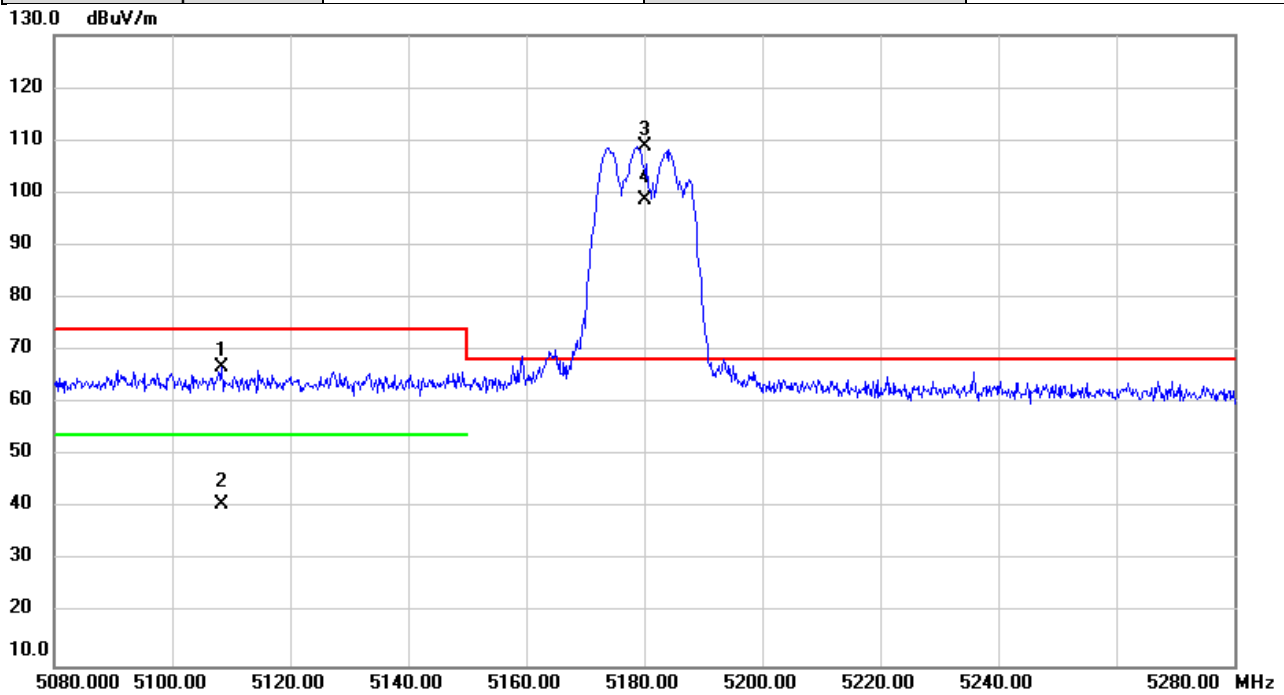


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5108.393	29.48	37.29	66.77	74.00	-7.23	peak	
2		5108.393	3.44	37.29	40.73	54.00	-13.27	AVG	
3	*	5180.000	71.49	37.38	108.87	68.20	40.67	peak	NoLimit
4	X	5180.000	61.23	37.38	98.61	68.20	30.41	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/3
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

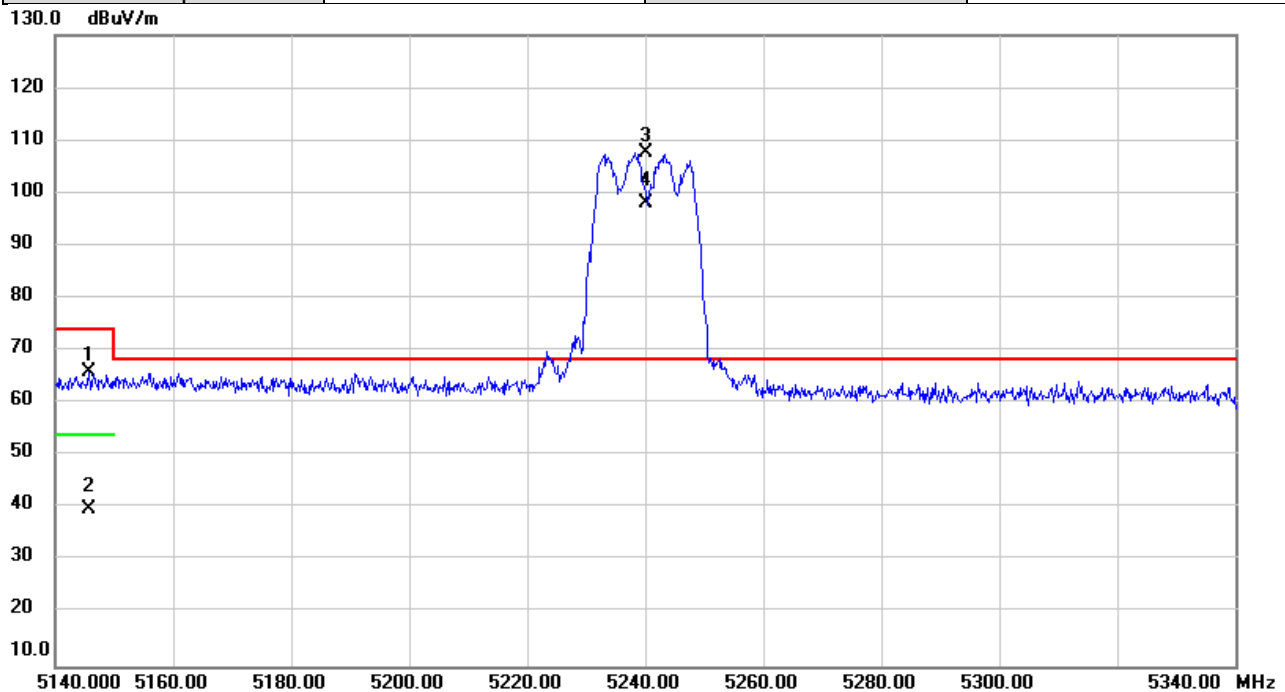


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5145.813	28.65	37.34	65.99	74.00	-8.01	peak	
2		5145.813	2.38	37.34	39.72	54.00	-14.28	AVG	
3	*	5240.000	70.28	37.46	107.74	68.20	39.54	peak	NoLimit
4	X	5240.000	60.53	37.46	97.99	68.20	29.79	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/2
Test Frequency	5260MHz	Polarization	Horizontal
Temp	22°C	Hum.	65%

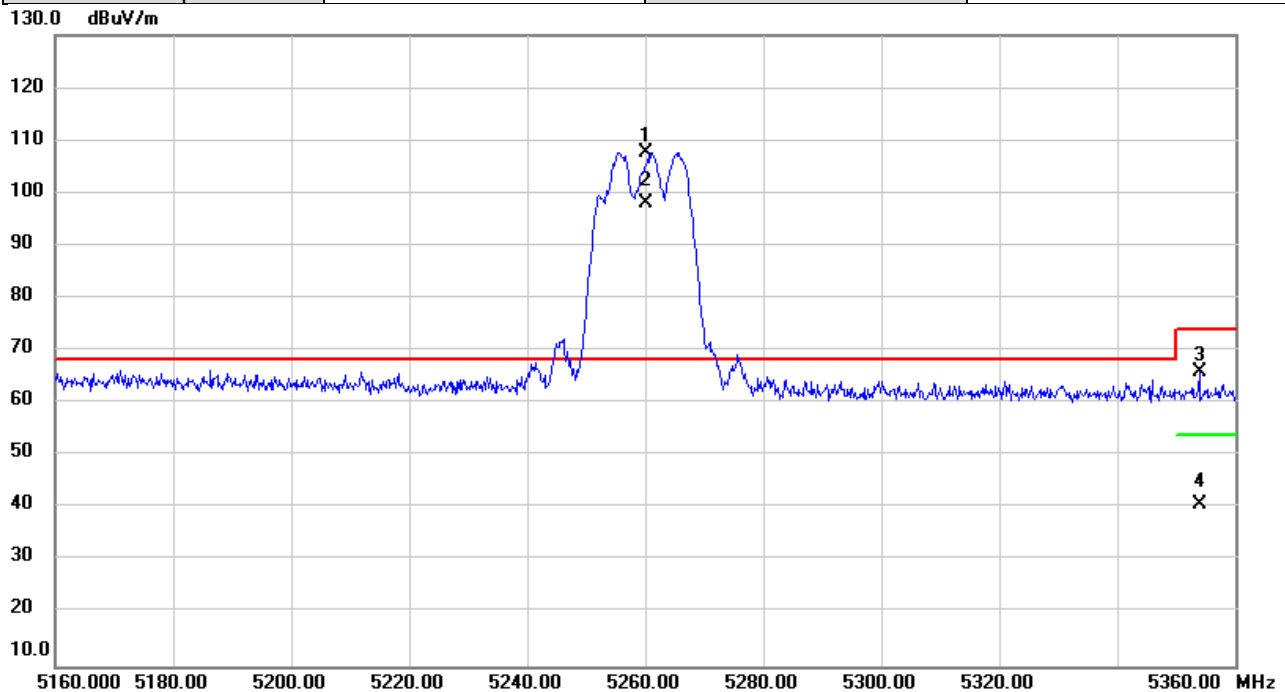


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5260.000	70.10	37.49	107.59	68.20	39.39	peak	NoLimit
2	X	5260.000	60.56	37.49	98.05	68.20	29.85	AVG	NoLimit
3		5353.900	28.22	37.61	65.83	74.00	-8.17	peak	
4		5353.900	3.29	37.61	40.90	54.00	-13.10	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/2
Test Frequency	5320MHz	Polarization	Horizontal
Temp	22°C	Hum.	65%

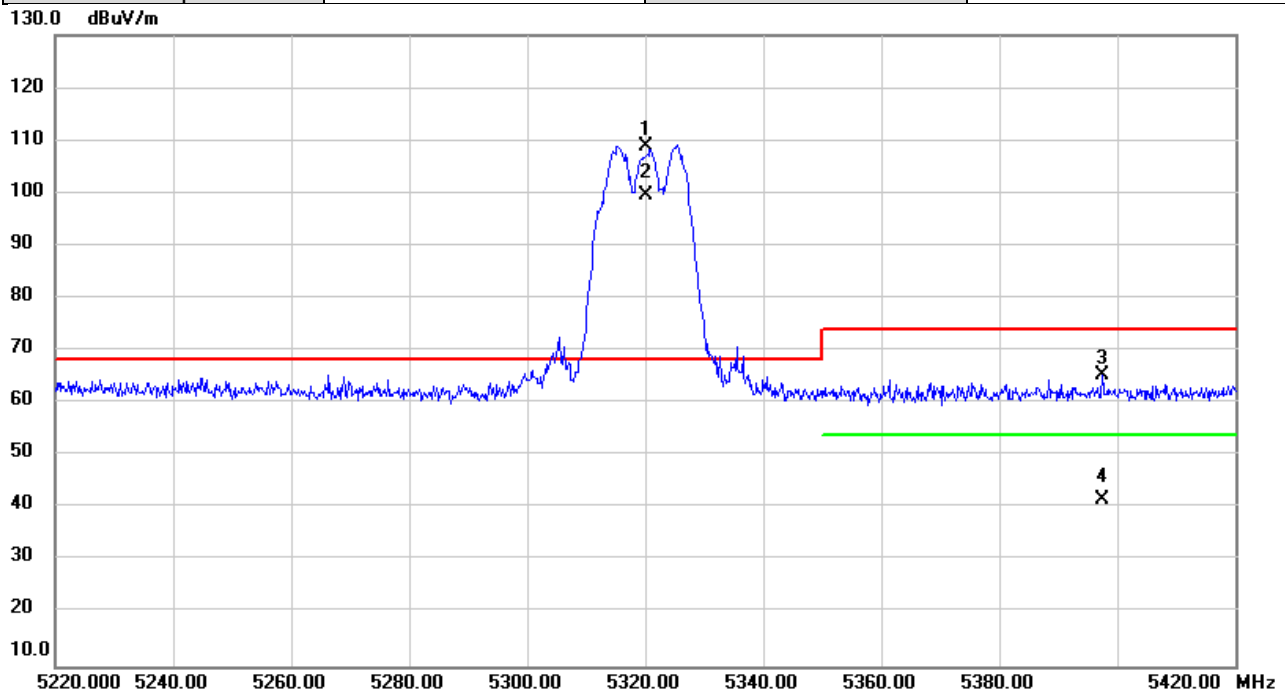


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	71.43	37.57	109.00	68.20	40.80	peak	NoLimit
2	X	5320.000	61.89	37.57	99.46	68.20	31.26	AVG	NoLimit
3		5397.533	27.59	37.67	65.26	74.00	-8.74	peak	
4		5397.533	4.02	37.67	41.69	54.00	-12.31	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/3
Test Frequency	5500MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

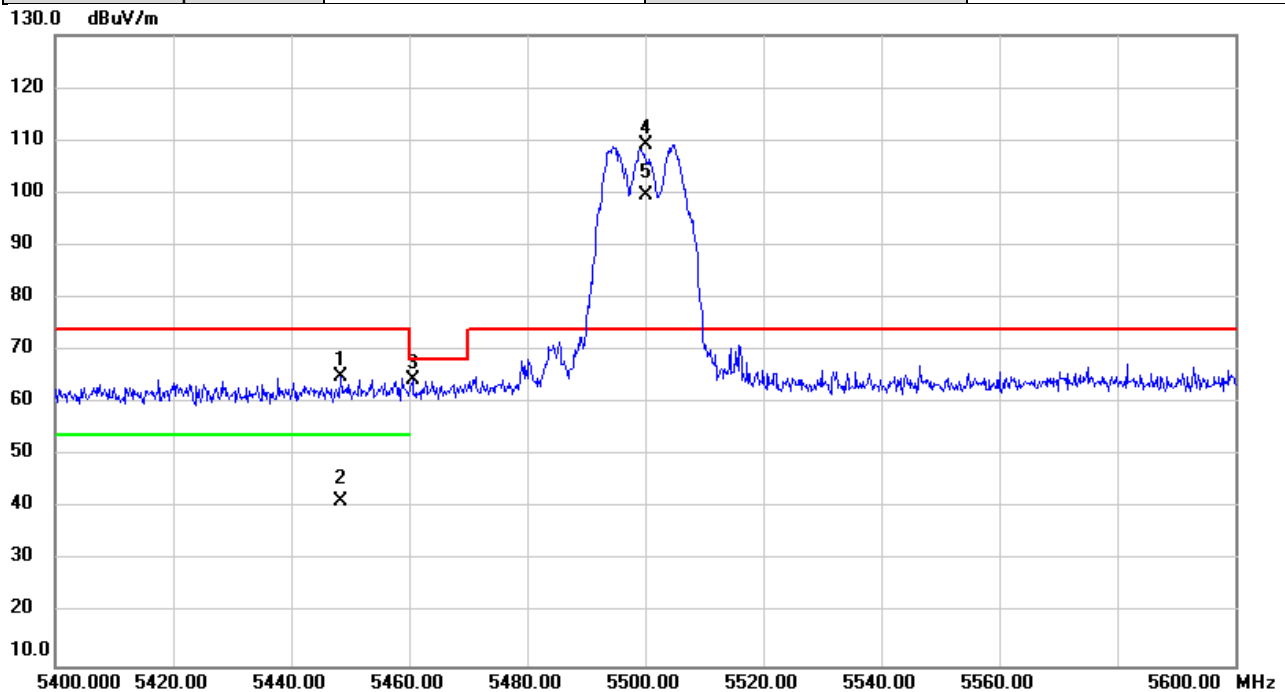


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5448.400	27.39	37.74	65.13	74.00	-8.87	peak	
2		5448.400	3.70	37.74	41.44	54.00	-12.56	AVG	
3		5460.553	26.59	37.76	64.35	68.20	-3.85	peak	
4	*	5500.000	71.28	37.81	109.09	74.00	35.09	peak	NoLimit
5	X	5500.000	61.61	37.81	99.42	74.00	25.42	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/3
Test Frequency	5700MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

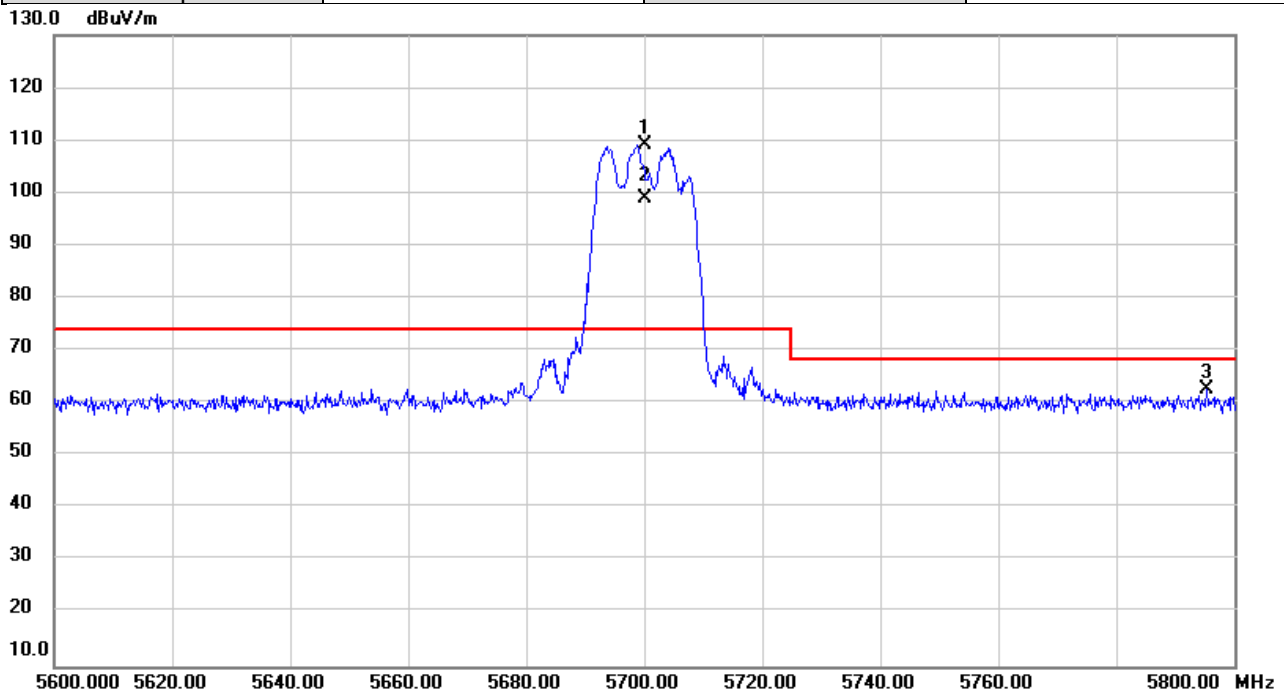


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	70.82	38.26	109.08	74.00	35.08	peak	NoLimit
2	X	5700.000	60.62	38.26	98.88	74.00	24.88	AVG	NoLimit
3		5795.307	24.24	38.47	62.71	68.20	-5.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/3
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

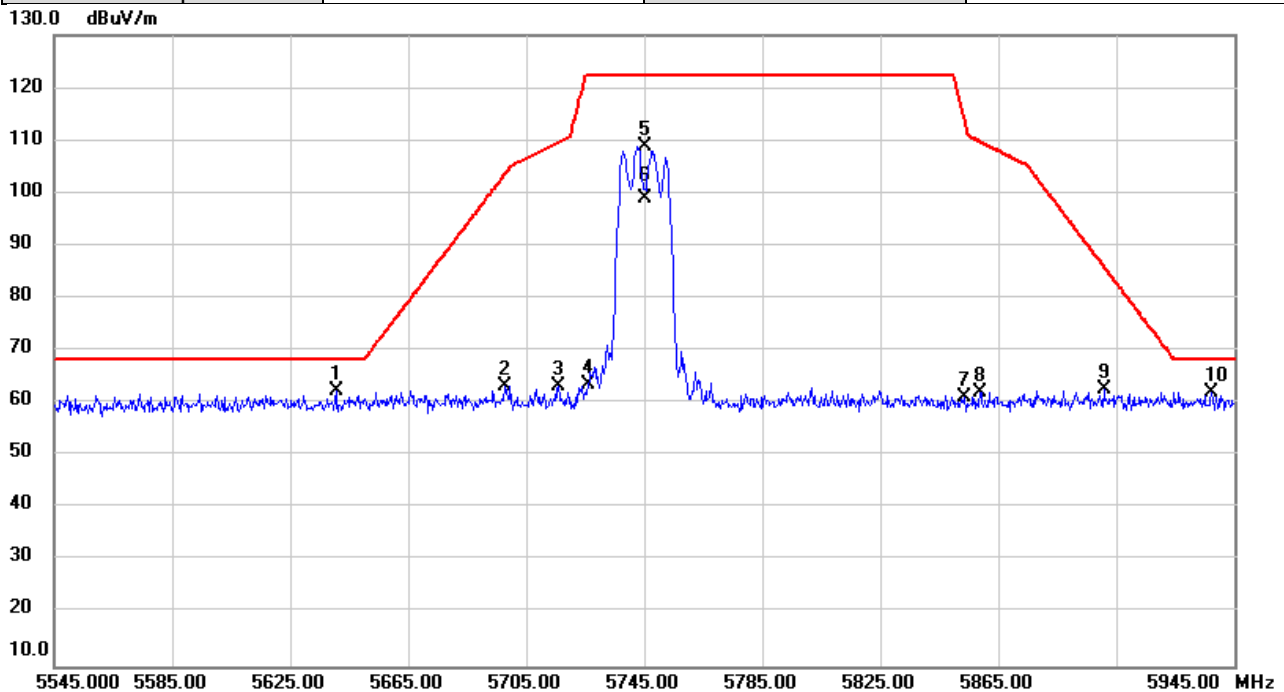


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5640.547	24.23	38.13	62.36	68.20	-5.84	peak	
2		5698.040	24.94	38.26	63.20	103.76	-40.56	peak	
3		5715.960	24.88	38.29	63.17	109.67	-46.50	peak	
4		5726.173	25.25	38.32	63.57	122.20	-58.63	peak	
5		5745.000	70.51	38.36	108.87	122.20	-13.33	peak	NoLimit
6		5745.000	60.47	38.36	98.83	122.20	-23.37	AVG	NoLimit
7		5853.533	22.53	38.60	61.13	114.14	-53.01	peak	
8		5858.760	23.46	38.61	62.07	109.75	-47.68	peak	
9		5900.800	23.80	38.71	62.51	86.07	-23.56	peak	
10		5937.120	23.39	38.79	62.18	68.20	-6.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/3
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

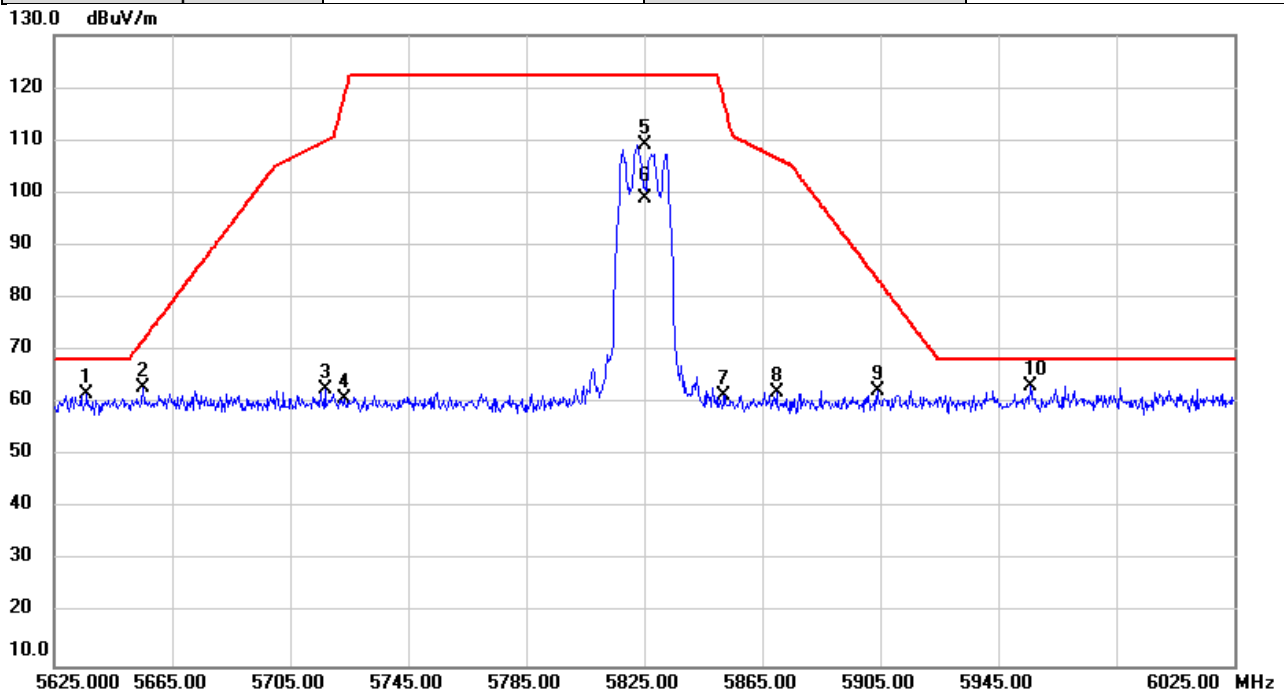


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5635.880	23.64	38.11	61.75	68.20	-6.45	peak	
2		5655.080	24.66	38.16	62.82	71.97	-9.15	peak	
3		5716.747	24.30	38.29	62.59	109.89	-47.30	peak	
4		5723.213	22.43	38.31	60.74	118.13	-57.39	peak	
5		5825.000	70.49	38.54	109.03	122.20	-13.17	peak	NoLimit
6		5825.000	60.47	38.54	99.01	122.20	-23.19	AVG	NoLimit
7		5852.187	22.85	38.60	61.45	117.21	-55.76	peak	
8		5870.133	23.28	38.64	61.92	106.56	-44.64	peak	
9		5904.013	23.52	38.72	62.24	83.69	-21.45	peak	
10	*	5955.947	24.55	38.83	63.38	68.20	-4.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/3
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

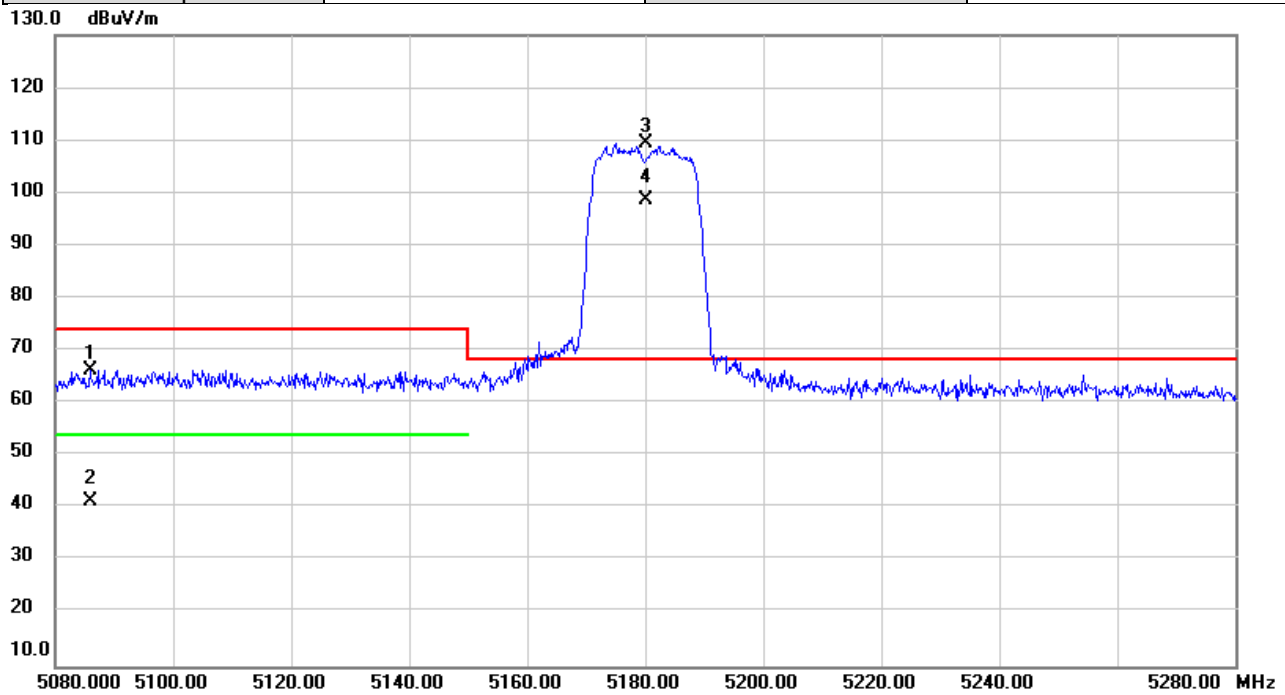


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5085.980	29.09	37.26	66.35	74.00	-7.65	peak	
2		5085.980	4.22	37.26	41.48	54.00	-12.52	AVG	
3	*	5180.000	72.15	37.38	109.53	68.20	41.33	peak	NoLimit
4	X	5180.000	61.37	37.38	98.75	68.20	30.55	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/3
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

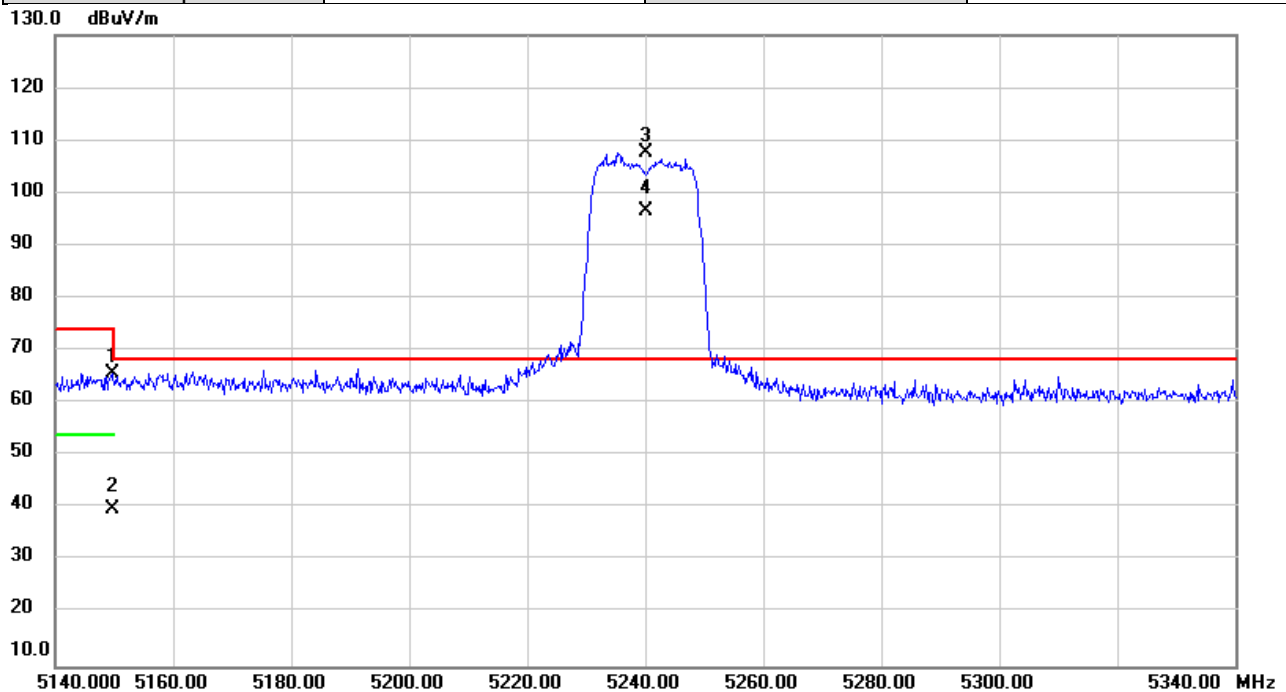


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5149.793	28.25	37.34	65.59	74.00	-8.41	peak	
2		5149.793	2.64	37.34	39.98	54.00	-14.02	AVG	
3	*	5240.000	70.09	37.46	107.55	68.20	39.35	peak	NoLimit
4	X	5240.000	59.17	37.46	96.63	68.20	28.43	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/3
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

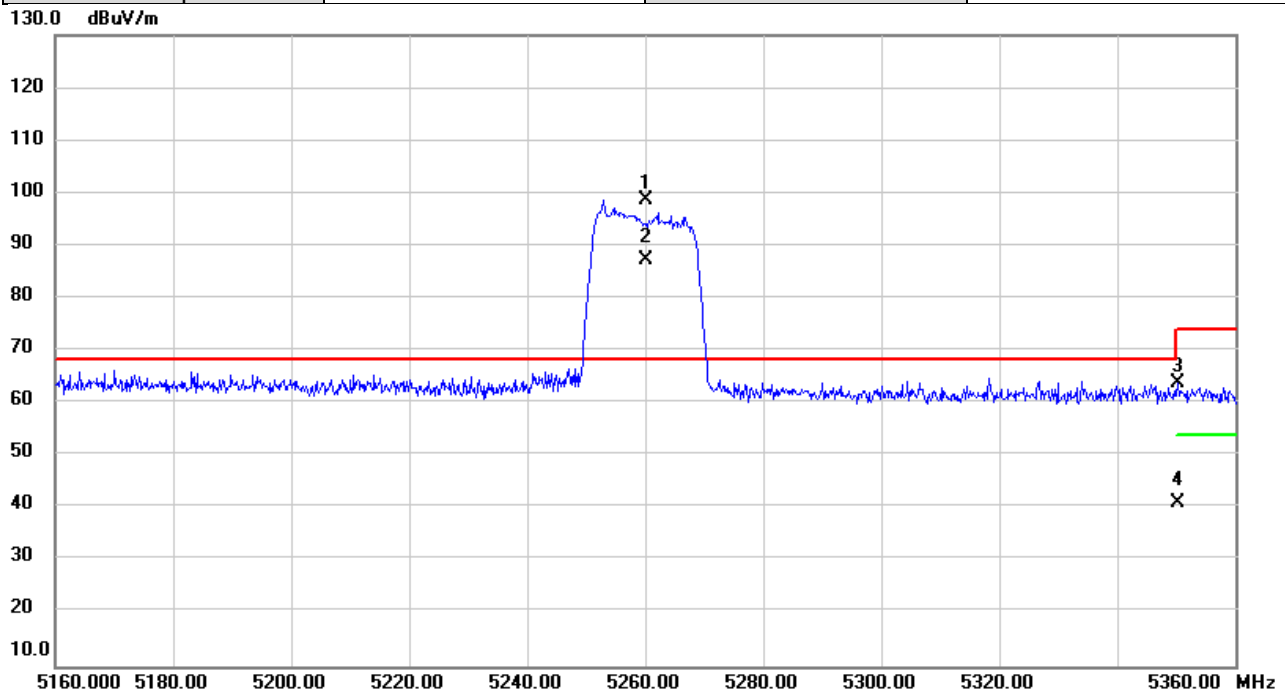


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5260.000	61.23	37.49	98.72	68.20	30.52	peak	NoLimit
2	X	5260.000	49.65	37.49	87.14	68.20	18.94	AVG	NoLimit
3		5350.367	26.18	37.61	63.79	74.00	-10.21	peak	
4		5350.367	3.33	37.61	40.94	54.00	-13.06	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/3
Test Frequency	5320MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

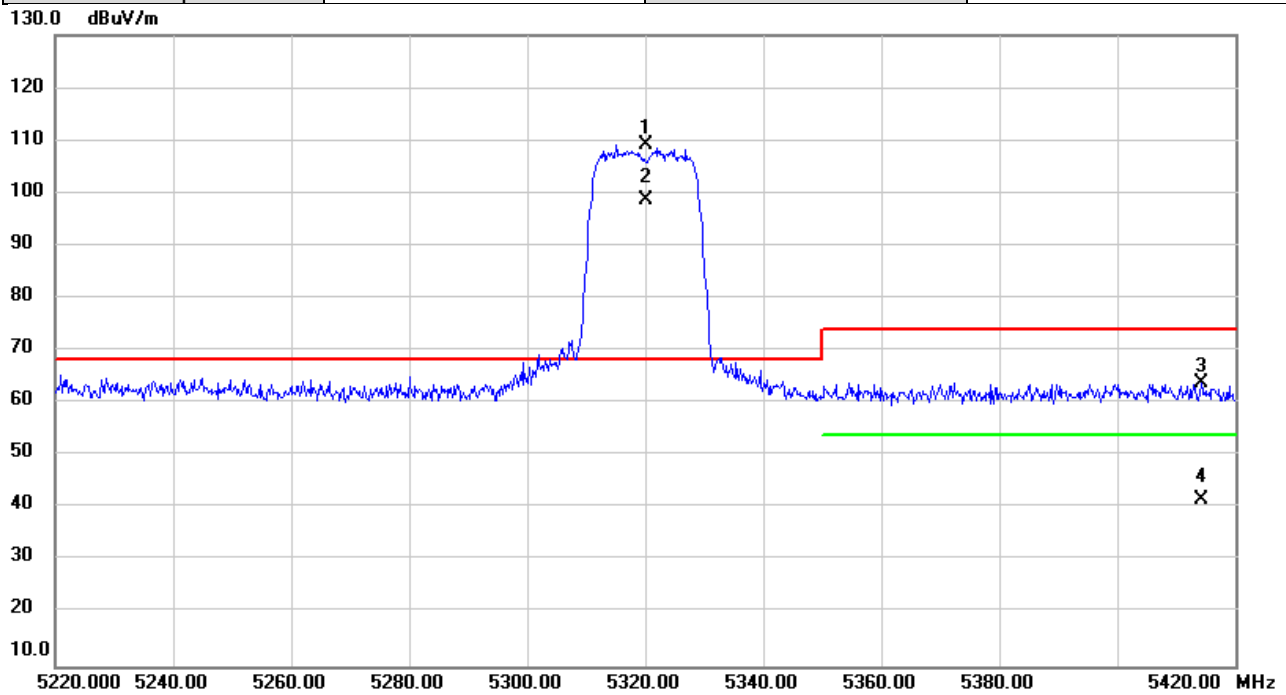


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5320.000	71.71	37.57	109.28	68.20	41.08	peak	NoLimit
2	X	5320.000	61.02	37.57	98.59	68.20	30.39	AVG	NoLimit
3		5414.273	26.27	37.69	63.96	74.00	-10.04	peak	
4		5414.273	3.98	37.69	41.67	54.00	-12.33	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/3
Test Frequency	5500MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

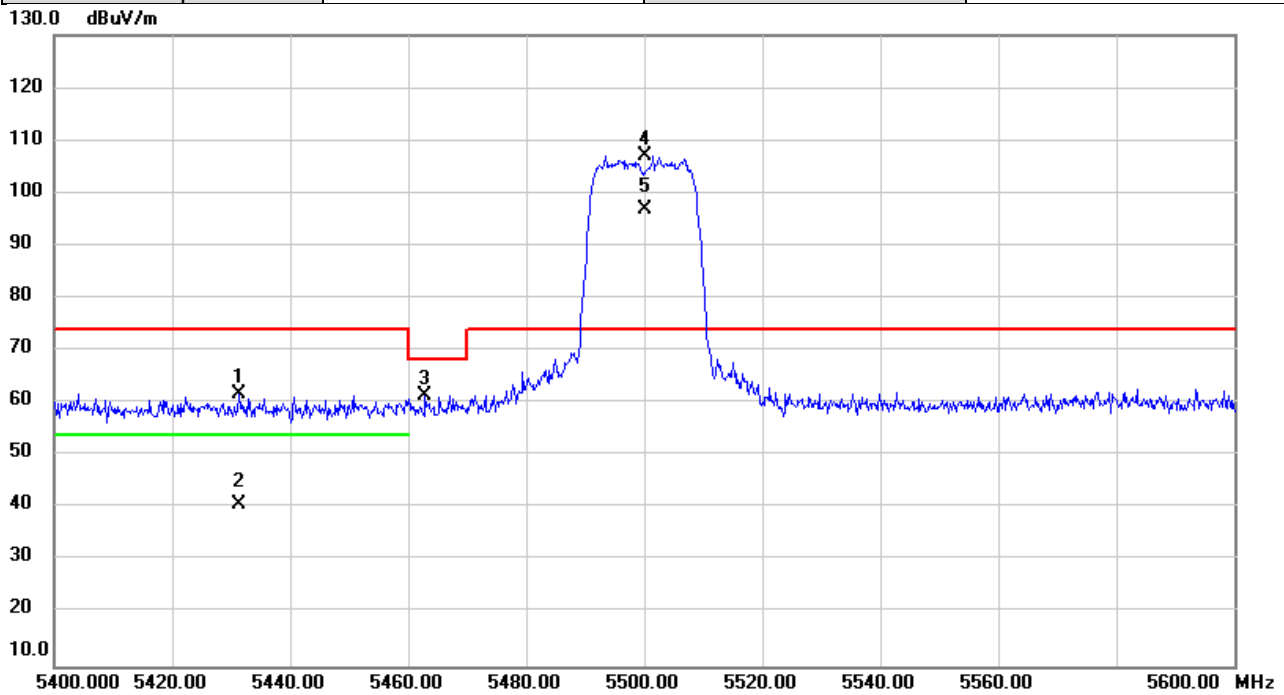


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5431.333	24.15	37.72	61.87	74.00	-12.13	peak	
2		5431.333	3.18	37.72	40.90	54.00	-13.10	AVG	
3		5462.913	23.78	37.76	61.54	68.20	-6.66	peak	
4	*	5500.000	69.30	37.81	107.11	74.00	33.11	peak	NoLimit
5	X	5500.000	59.12	37.81	96.93	74.00	22.93	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/3
Test Frequency	5700MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

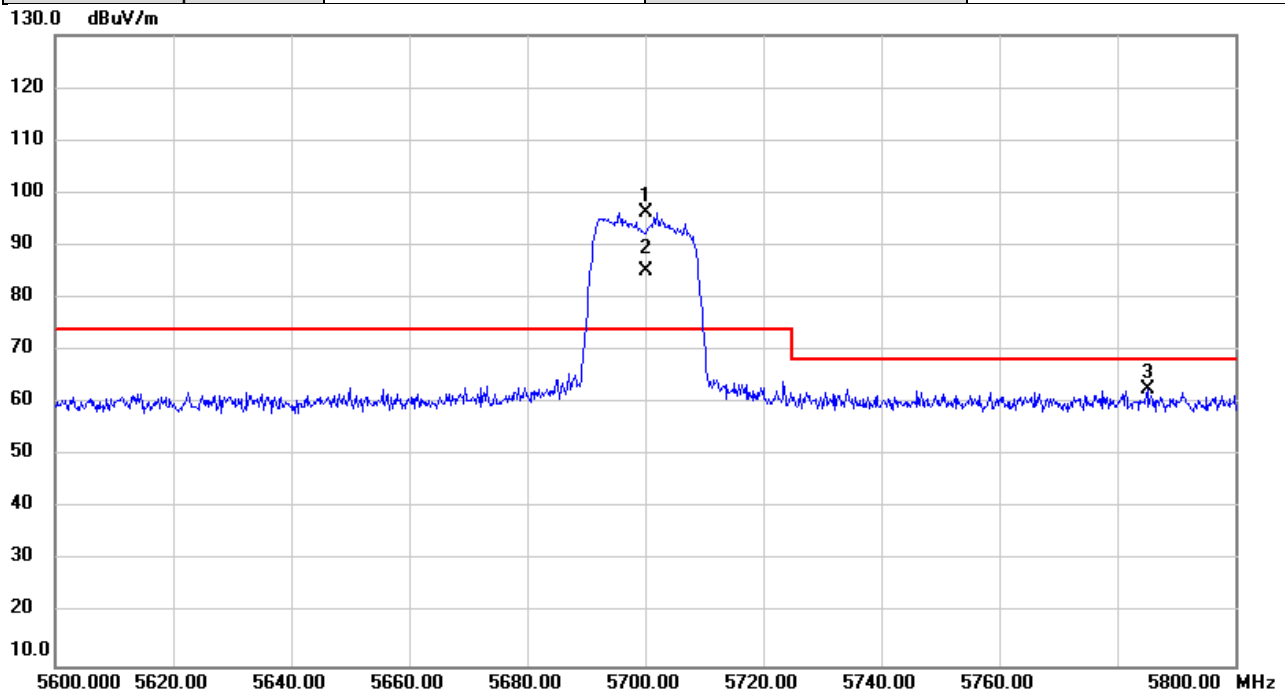


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	58.02	38.26	96.28	74.00	22.28	peak	NoLimit
2	X	5700.000	46.92	38.26	85.18	74.00	11.18	AVG	NoLimit
3		5785.107	24.15	38.45	62.60	68.20	-5.60	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/3
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

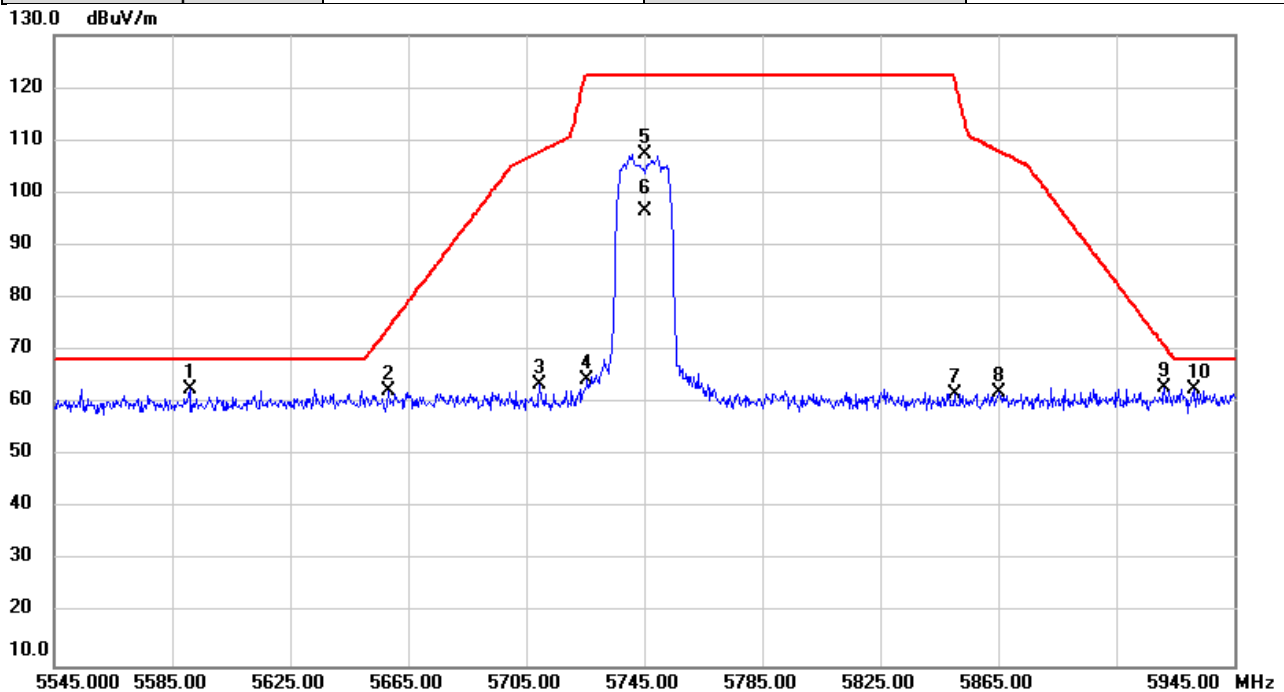


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5590.920	24.76	38.02	62.78	68.20	-5.42	peak	
2		5658.173	24.27	38.16	62.43	74.27	-11.84	peak	
3		5709.680	25.18	38.28	63.46	107.91	-44.45	peak	
4		5725.667	26.00	38.32	64.32	122.20	-57.88	peak	
5		5745.000	68.86	38.36	107.22	122.20	-14.98	peak	NoLimit
6		5745.000	58.19	38.36	96.55	122.20	-25.65	AVG	NoLimit
7		5850.160	23.13	38.59	61.72	121.84	-60.12	peak	
8		5865.387	23.48	38.63	62.11	107.89	-45.78	peak	
9		5921.213	24.20	38.75	62.95	70.99	-8.04	peak	
10		5931.453	24.00	38.77	62.77	68.20	-5.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/3
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

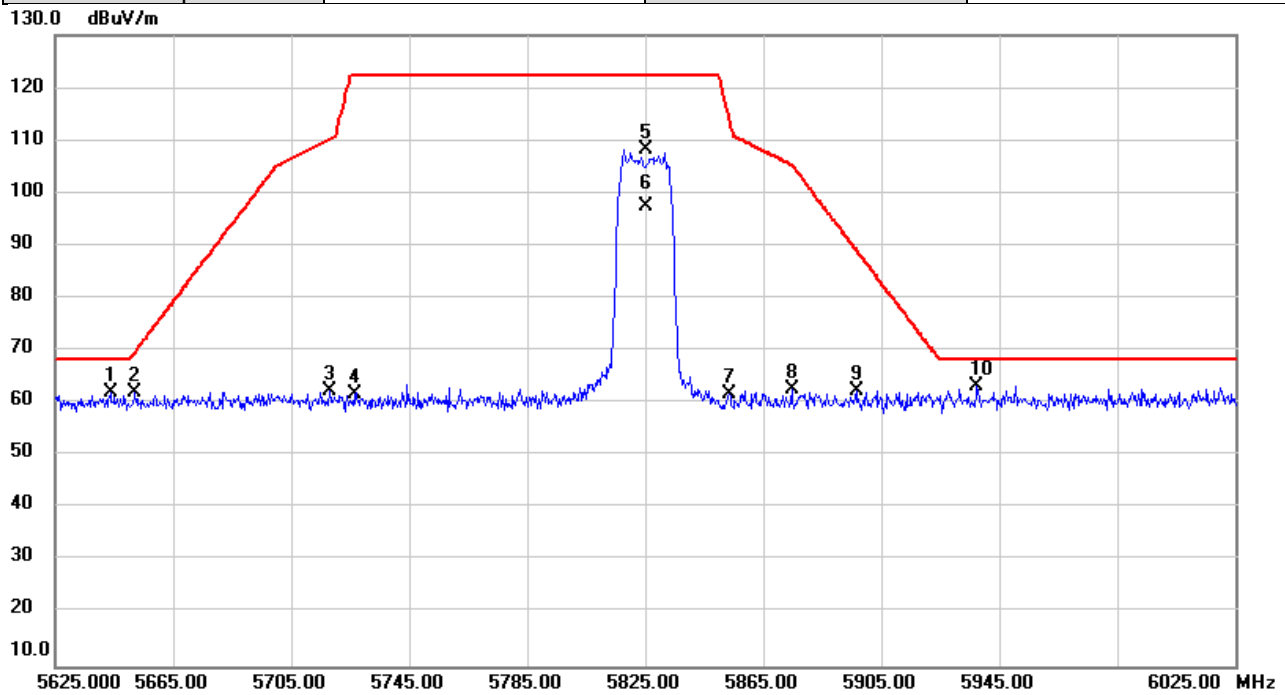


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5643.720	23.83	38.13	61.96	68.20	-6.24	peak	
2		5651.920	23.84	38.15	61.99	69.63	-7.64	peak	
3		5717.987	24.04	38.30	62.34	110.24	-47.90	peak	
4		5726.520	23.32	38.32	61.64	122.20	-60.56	peak	
5		5825.000	69.68	38.54	108.22	122.20	-13.98	peak	NoLimit
6		5825.000	58.95	38.54	97.49	122.20	-24.71	AVG	NoLimit
7		5853.573	23.13	38.61	61.74	114.05	-52.31	peak	
8		5874.813	23.95	38.64	62.59	105.25	-42.66	peak	
9		5896.520	23.58	38.70	62.28	89.24	-26.96	peak	
10	*	5937.533	24.61	38.79	63.40	68.20	-4.80	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/3
Test Frequency	5190MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

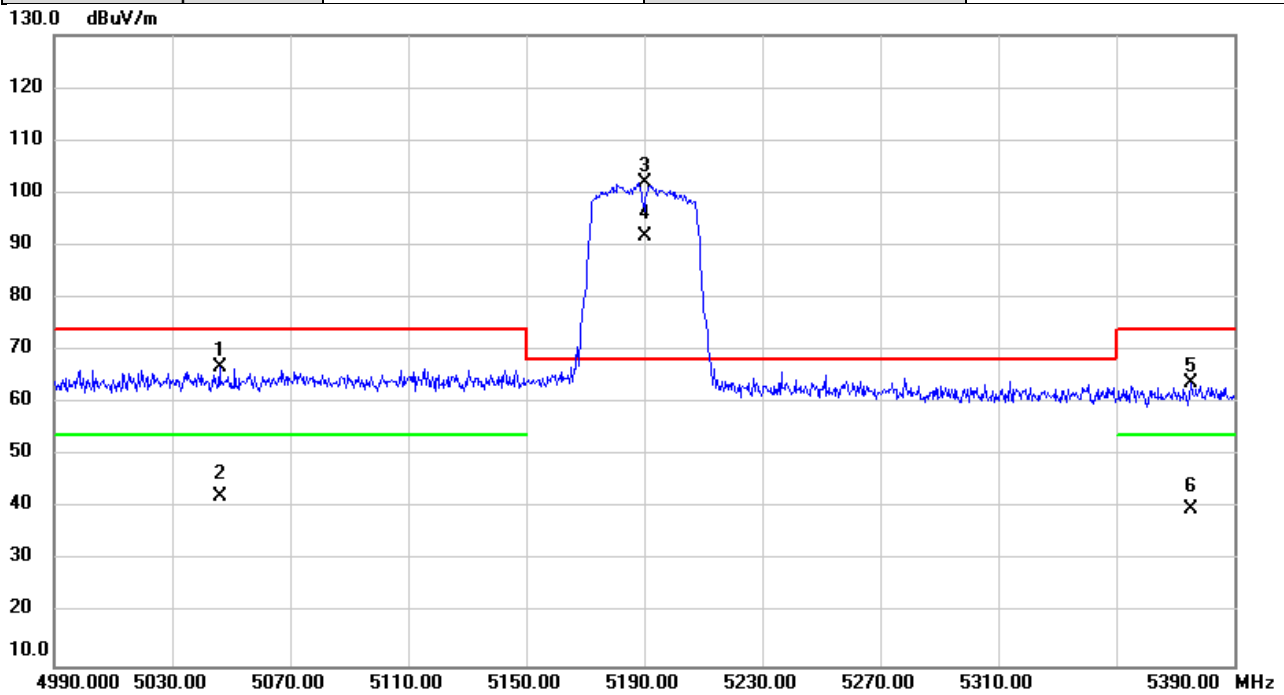


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5046.240	29.69	37.20	66.89	74.00	-7.11	peak	
2		5046.240	5.10	37.20	42.30	54.00	-11.70	AVG	
3	*	5190.000	64.51	37.39	101.90	68.20	33.70	peak	NoLimit
4	X	5190.000	54.38	37.39	91.77	68.20	23.57	AVG	NoLimit
5		5375.213	26.06	37.64	63.70	74.00	-10.30	peak	
6		5375.213	2.18	37.64	39.82	54.00	-14.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/3
Test Frequency	5230MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

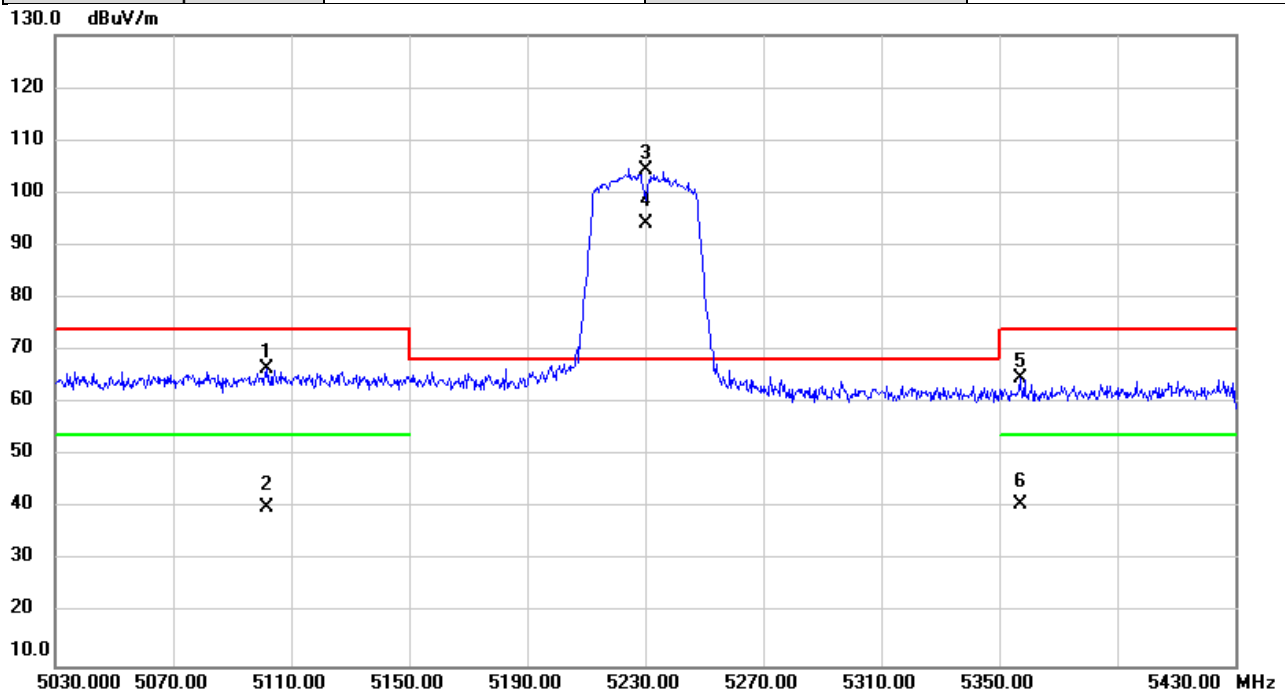


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5101.747	29.18	37.27	66.45	74.00	-7.55	peak	
2		5101.747	2.96	37.27	40.23	54.00	-13.77	AVG	
3	*	5230.000	67.06	37.44	104.50	68.20	36.30	peak	NoLimit
4	X	5230.000	56.61	37.44	94.05	68.20	25.85	AVG	NoLimit
5		5357.173	27.07	37.62	64.69	74.00	-9.31	peak	
6		5357.173	2.98	37.62	40.60	54.00	-13.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/3
Test Frequency	5270MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

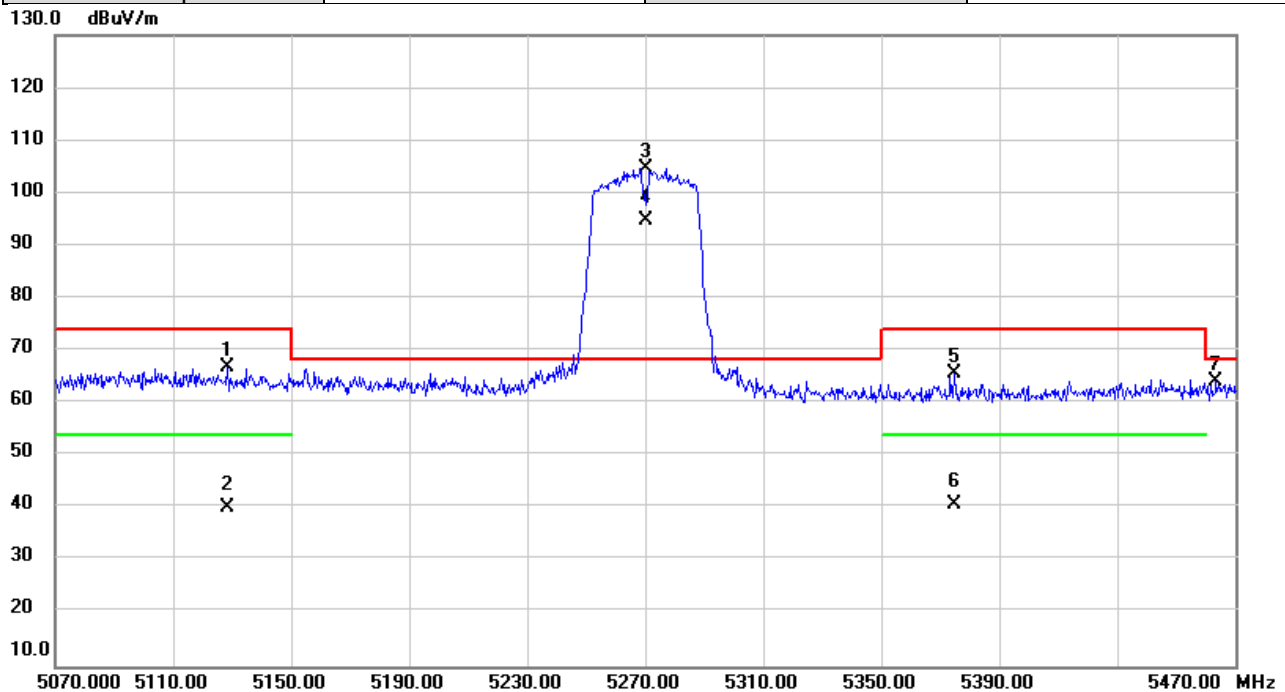


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5128.653	29.46	37.31	66.77	74.00	-7.23	peak	
2		5128.653	2.78	37.31	40.09	54.00	-13.91	AVG	
3	*	5270.000	67.13	37.51	104.64	68.20	36.44	peak	NoLimit
4	X	5270.000	57.10	37.51	94.61	68.20	26.41	AVG	NoLimit
5		5374.800	27.89	37.64	65.53	74.00	-8.47	peak	
6		5374.800	3.18	37.64	40.82	54.00	-13.18	AVG	
7		5463.533	26.47	37.76	64.23	68.20	-3.97	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/3
Test Frequency	5310MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

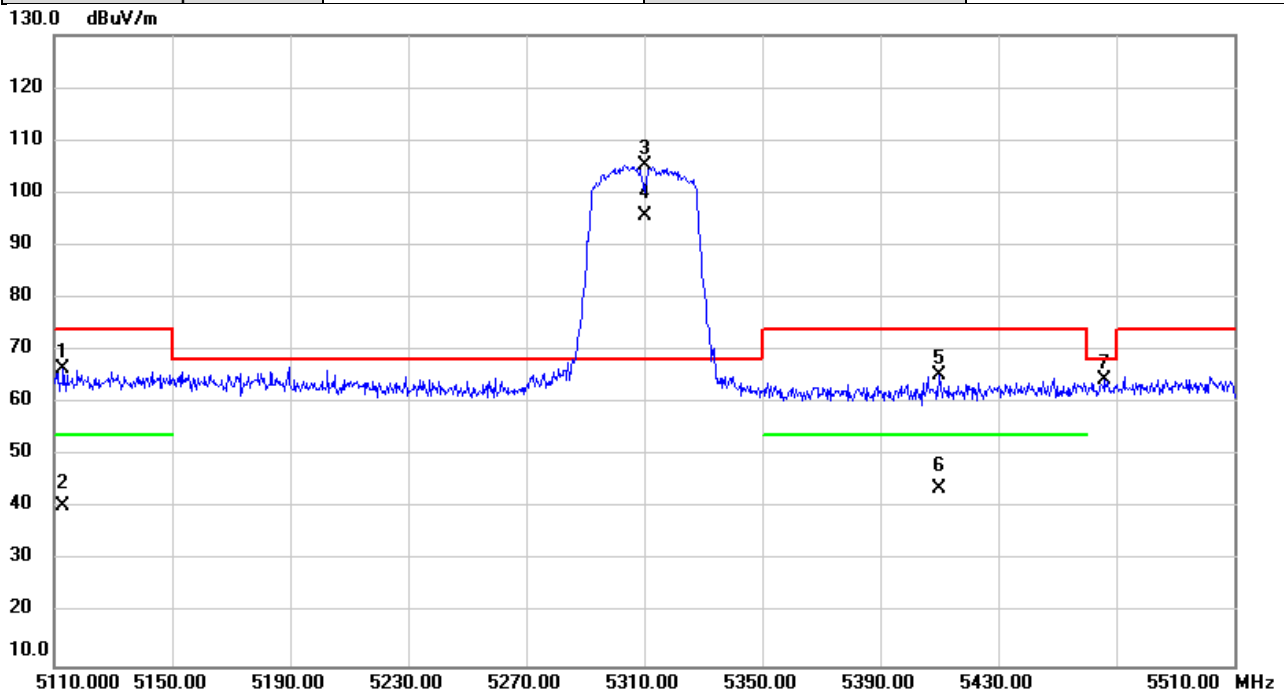


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5112.947	29.35	37.29	66.64	74.00	-7.36	peak	
2		5112.947	3.13	37.29	40.42	54.00	-13.58	AVG	
3	*	5310.000	67.74	37.56	105.30	68.20	37.10	peak	NoLimit
4	X	5310.000	58.10	37.56	95.66	68.20	27.46	AVG	NoLimit
5		5410.040	27.51	37.69	65.20	74.00	-8.80	peak	
6		5410.040	6.13	37.69	43.82	54.00	-10.18	AVG	
7		5466.240	26.62	37.76	64.38	68.20	-3.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/3
Test Frequency	5510MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

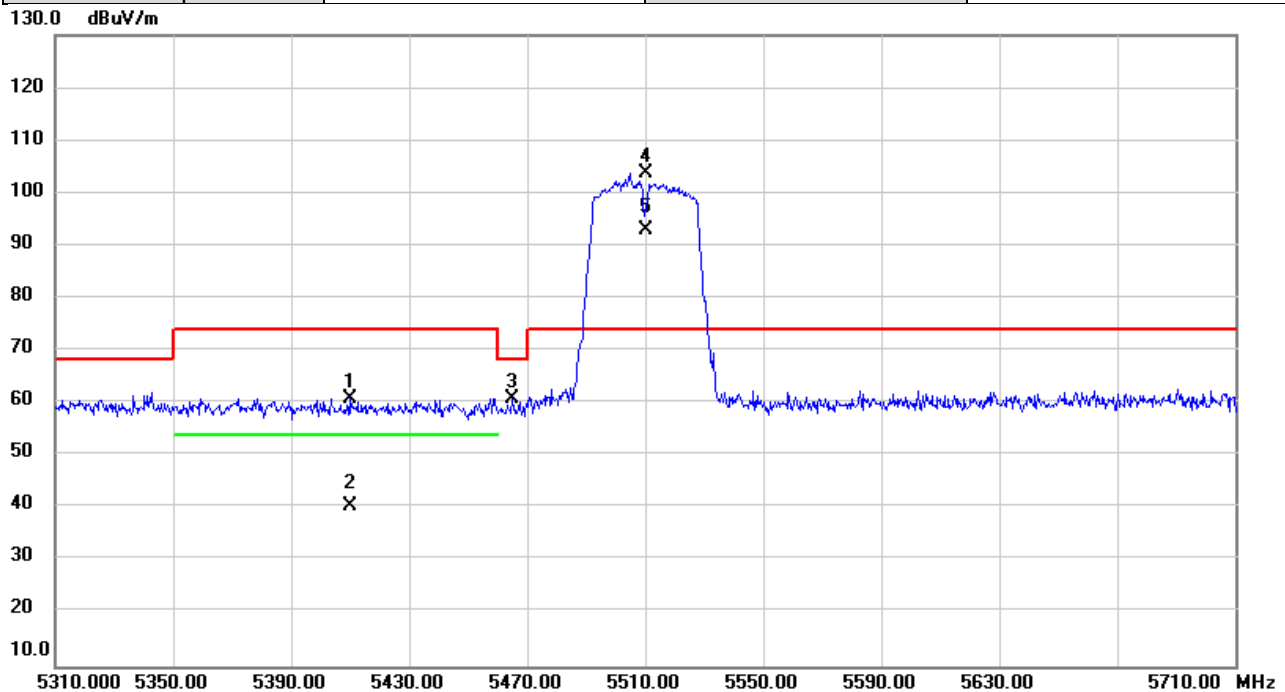


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5409.893	23.18	37.69	60.87	74.00	-13.13	peak	
2		5409.893	2.63	37.69	40.32	54.00	-13.68	AVG	
3		5464.853	23.07	37.76	60.83	68.20	-7.37	peak	
4	*	5510.000	65.78	37.83	103.61	74.00	29.61	peak	NoLimit
5	X	5510.000	55.09	37.83	92.92	74.00	18.92	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/3
Test Frequency	5670MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

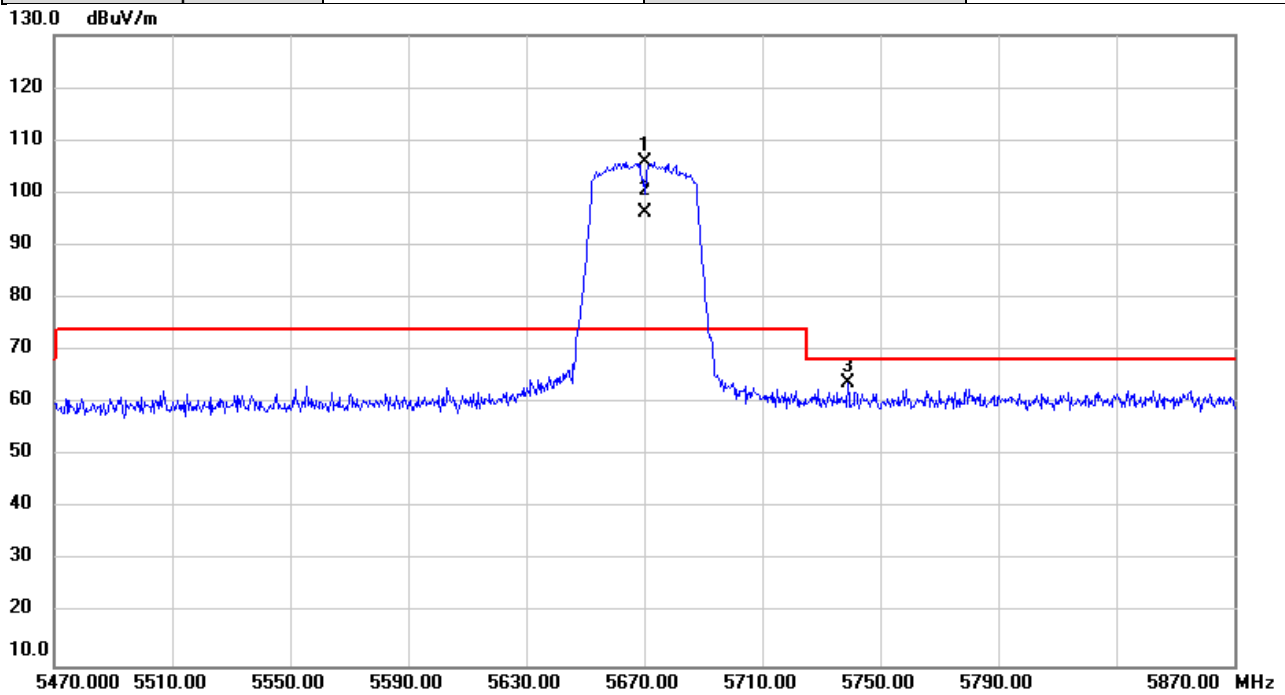


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5670.000	67.78	38.19	105.97	74.00	31.97	peak	NoLimit
2	X	5670.000	58.03	38.19	96.22	74.00	22.22	AVG	NoLimit
3		5738.907	25.45	38.34	63.79	68.20	-4.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/3
Test Frequency	5755MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

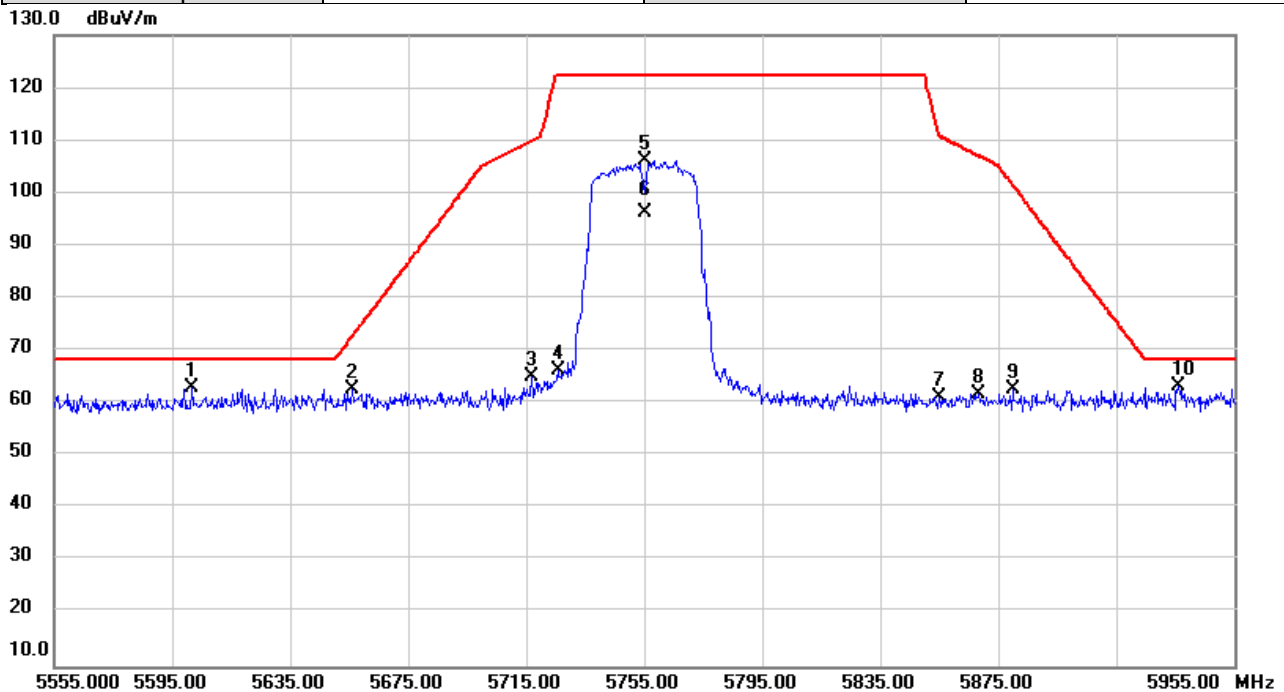


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5601.920	24.81	38.04	62.85	68.20	-5.35	peak	
2		5656.120	24.50	38.16	62.66	72.75	-10.09	peak	
3		5716.800	26.64	38.29	64.93	109.91	-44.98	peak	
4		5726.160	27.81	38.32	66.13	122.20	-56.07	peak	
5		5755.000	67.91	38.38	106.29	122.20	-15.91	peak	NoLimit
6		5755.000	57.94	38.38	96.32	122.20	-25.88	AVG	NoLimit
7		5854.867	22.58	38.61	61.19	111.10	-49.91	peak	
8		5868.213	23.23	38.64	61.87	107.10	-45.23	peak	
9		5880.053	23.93	38.66	62.59	101.45	-38.86	peak	
10	*	5935.827	24.32	38.79	63.11	68.20	-5.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/3
Test Frequency	5795MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

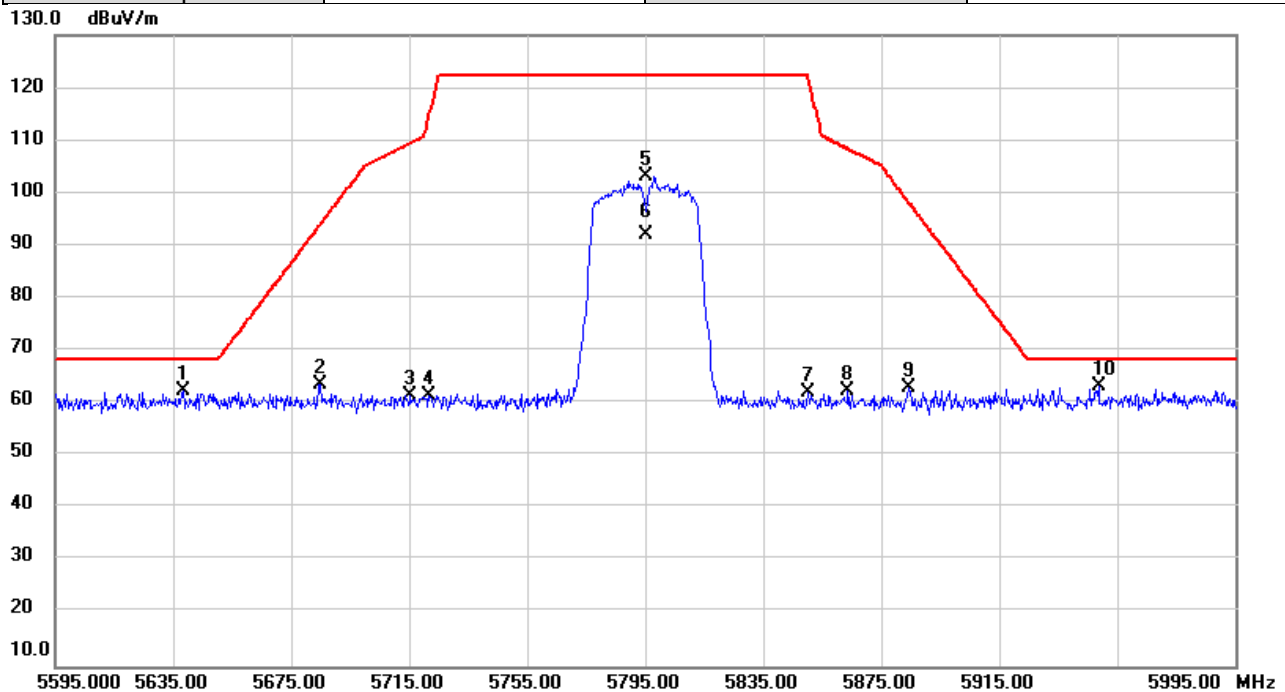


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5638.267	24.34	38.12	62.46	68.20	-5.74	peak	
2		5684.600	25.36	38.23	63.59	93.84	-30.25	peak	
3		5715.493	23.30	38.29	61.59	109.54	-47.95	peak	
4		5721.893	23.26	38.31	61.57	115.12	-53.55	peak	
5		5795.000	64.63	38.47	103.10	122.20	-19.10	peak	NoLimit
6		5795.000	53.69	38.47	92.16	122.20	-30.04	AVG	NoLimit
7		5850.253	23.48	38.59	62.07	121.62	-59.55	peak	
8		5863.707	23.67	38.63	62.30	108.36	-46.06	peak	
9		5884.467	24.15	38.67	62.82	98.17	-35.35	peak	
10	*	5948.813	24.29	38.82	63.11	68.20	-5.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/3
Test Frequency	5210MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

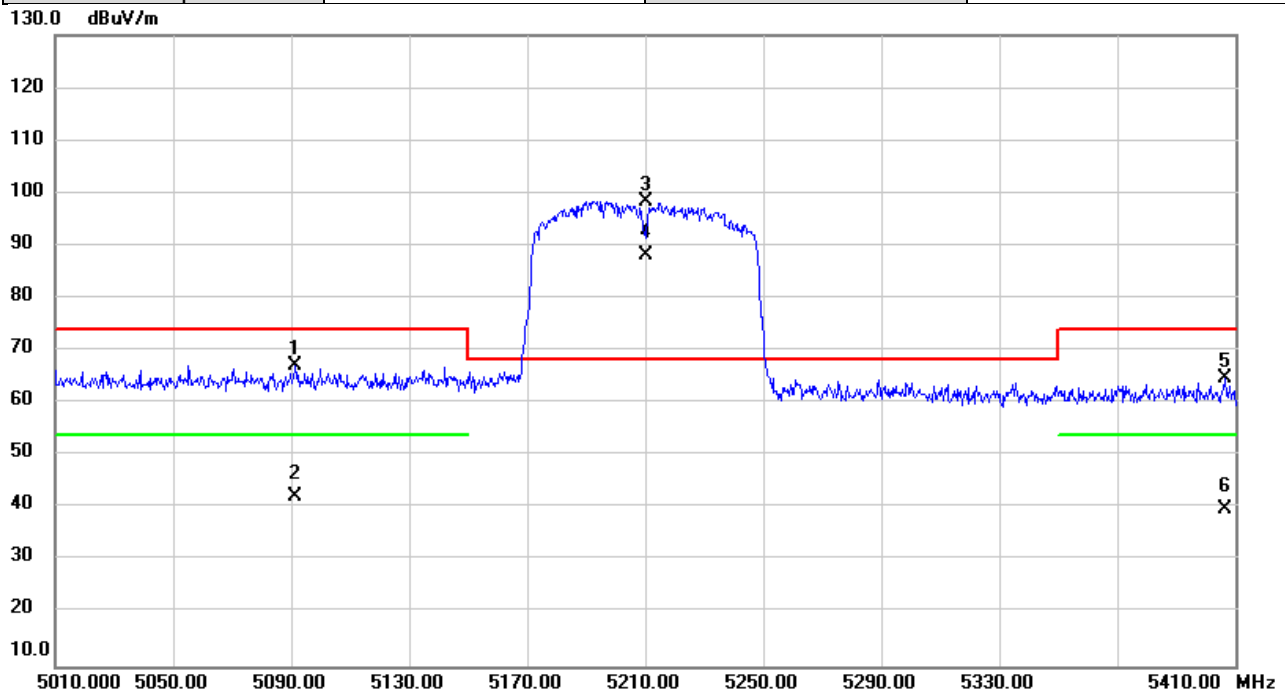


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5091.227	30.01	37.26	67.27	74.00	-6.73	peak	
2		5091.227	4.90	37.26	42.16	54.00	-11.84	AVG	
3	*	5210.000	61.06	37.42	98.48	68.20	30.28	peak	NoLimit
4	X	5210.000	50.71	37.42	88.13	68.20	19.93	AVG	NoLimit
5		5406.413	26.96	37.69	64.65	74.00	-9.35	peak	
6		5406.413	2.15	37.69	39.84	54.00	-14.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/3
Test Frequency	5290MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

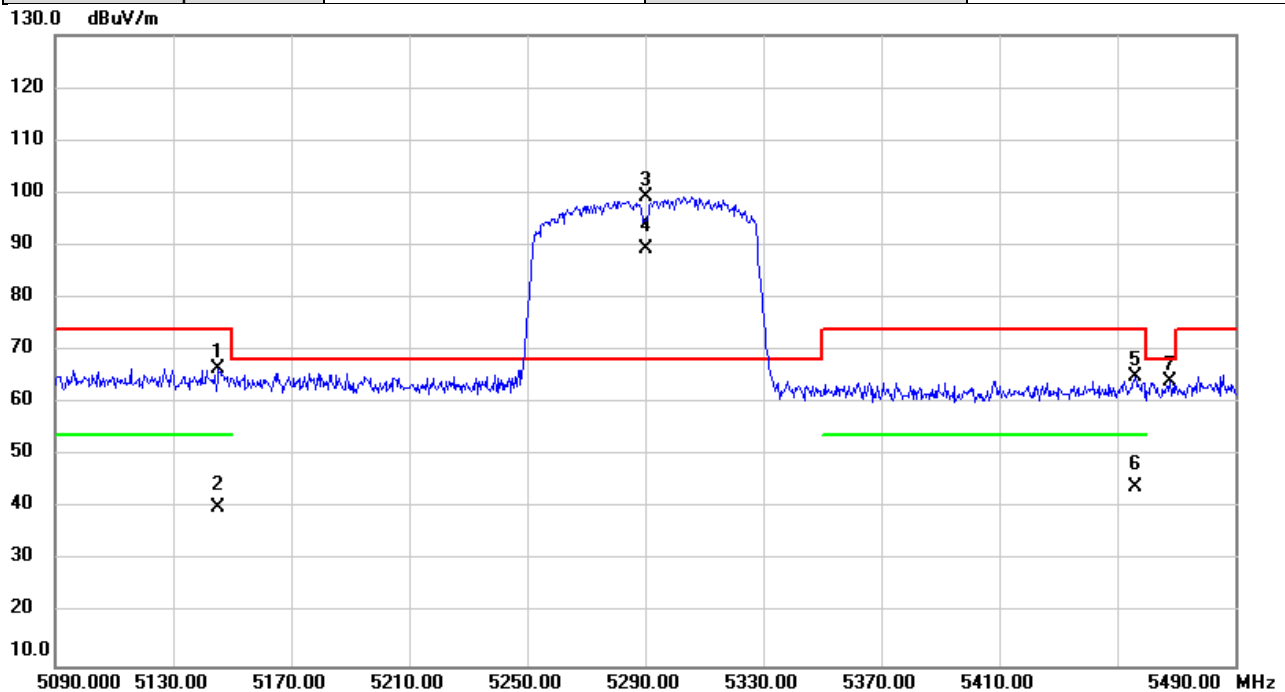


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5145.293	29.23	37.34	66.57	74.00	-7.43	peak	
2		5145.293	2.91	37.34	40.25	54.00	-13.75	AVG	
3	*	5290.000	61.64	37.53	99.17	68.20	30.97	peak	NoLimit
4	X	5290.000	51.79	37.53	89.32	68.20	21.12	AVG	NoLimit
5		5456.013	27.36	37.75	65.11	74.00	-8.89	peak	
6		5456.013	6.26	37.75	44.01	54.00	-9.99	AVG	
7		5467.813	26.26	37.76	64.02	68.20	-4.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/3
Test Frequency	5530MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

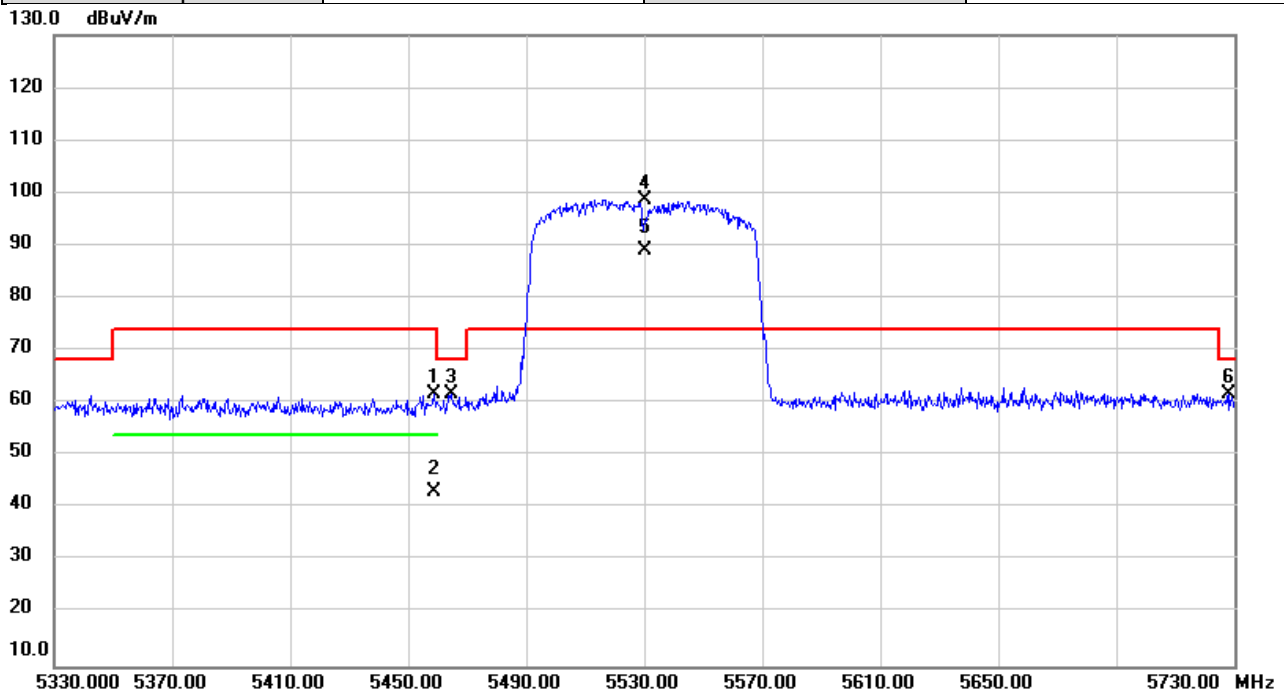


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5458.720	24.13	37.76	61.89	74.00	-12.11	peak	
2		5458.720	5.30	37.76	43.06	54.00	-10.94	AVG	
3		5464.413	23.98	37.76	61.74	68.20	-6.46	peak	
4	*	5530.000	60.77	37.88	98.65	74.00	24.65	peak	NoLimit
5	X	5530.000	51.26	37.88	89.14	74.00	15.14	AVG	NoLimit
6		5728.093	23.45	38.32	61.77	68.20	-6.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/3
Test Frequency	5610MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

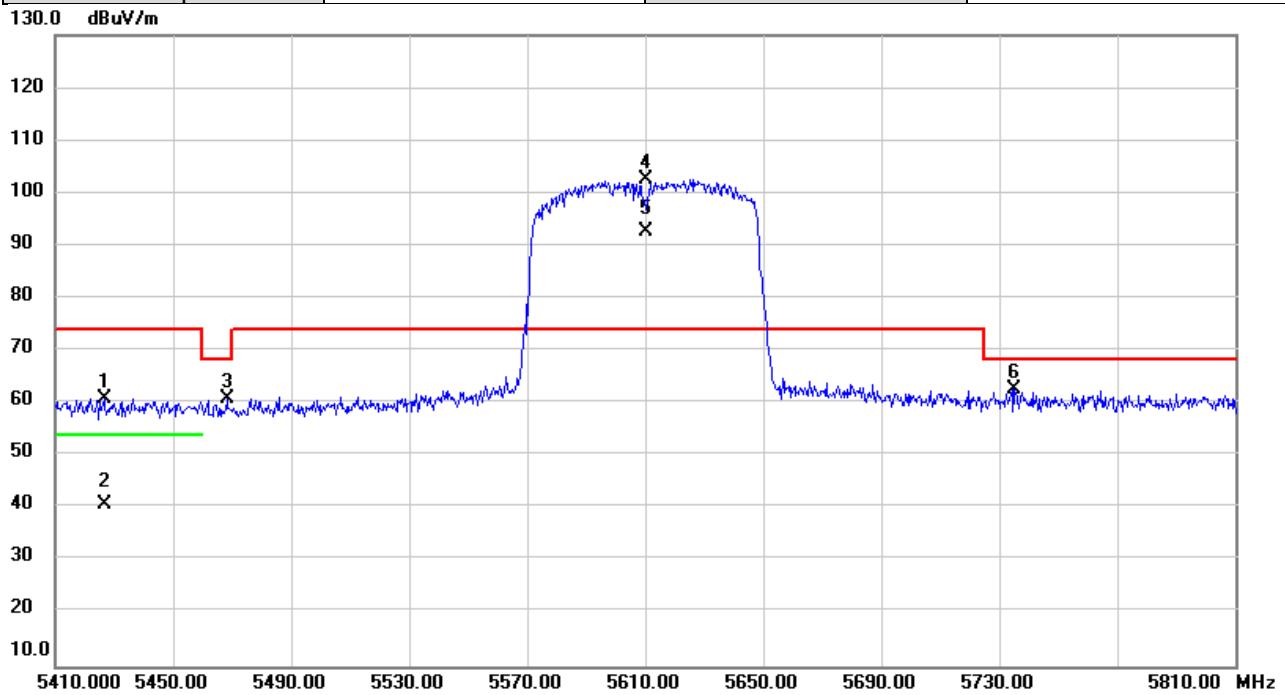


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5426.760	23.19	37.71	60.90	74.00	-13.10	peak	
2		5426.760	3.04	37.71	40.75	54.00	-13.25	AVG	
3		5468.293	22.98	37.76	60.74	68.20	-7.46	peak	
4	*	5610.000	64.40	38.05	102.45	74.00	28.45	peak	NoLimit
5	X	5610.000	54.46	38.05	92.51	74.00	18.51	AVG	NoLimit
6		5735.293	24.20	38.34	62.54	68.20	-5.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/3
Test Frequency	5775MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

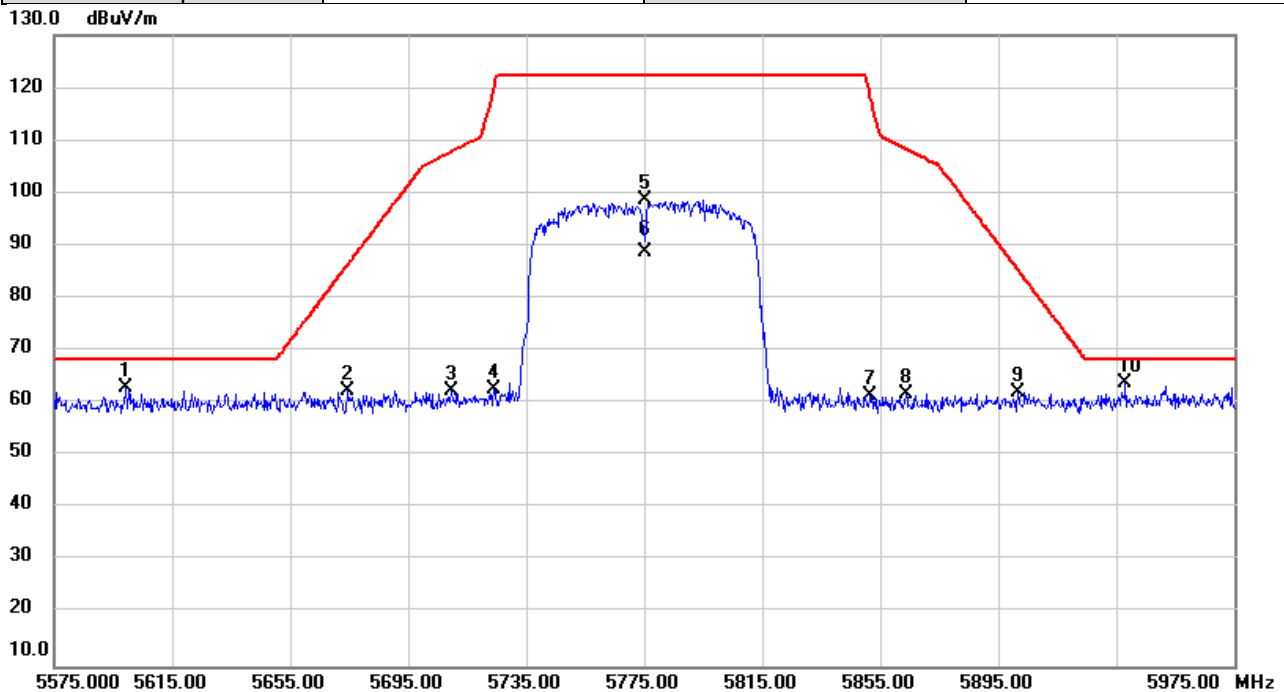


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5599.413	24.84	38.03	62.87	68.20	-5.33	peak	
2		5674.360	24.23	38.20	62.43	86.27	-23.84	peak	
3		5709.680	24.22	38.28	62.50	107.91	-45.41	peak	
4		5724.067	24.43	38.31	62.74	120.07	-57.33	peak	
5		5775.000	60.09	38.42	98.51	122.20	-23.69	peak	NoLimit
6		5775.000	50.24	38.42	88.66	122.20	-33.54	AVG	NoLimit
7		5851.720	22.94	38.60	61.54	118.28	-56.74	peak	
8		5863.653	23.13	38.63	61.76	108.37	-46.61	peak	
9		5901.707	23.36	38.71	62.07	85.40	-23.33	peak	
10	*	5937.973	24.99	38.79	63.78	68.20	-4.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5180MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

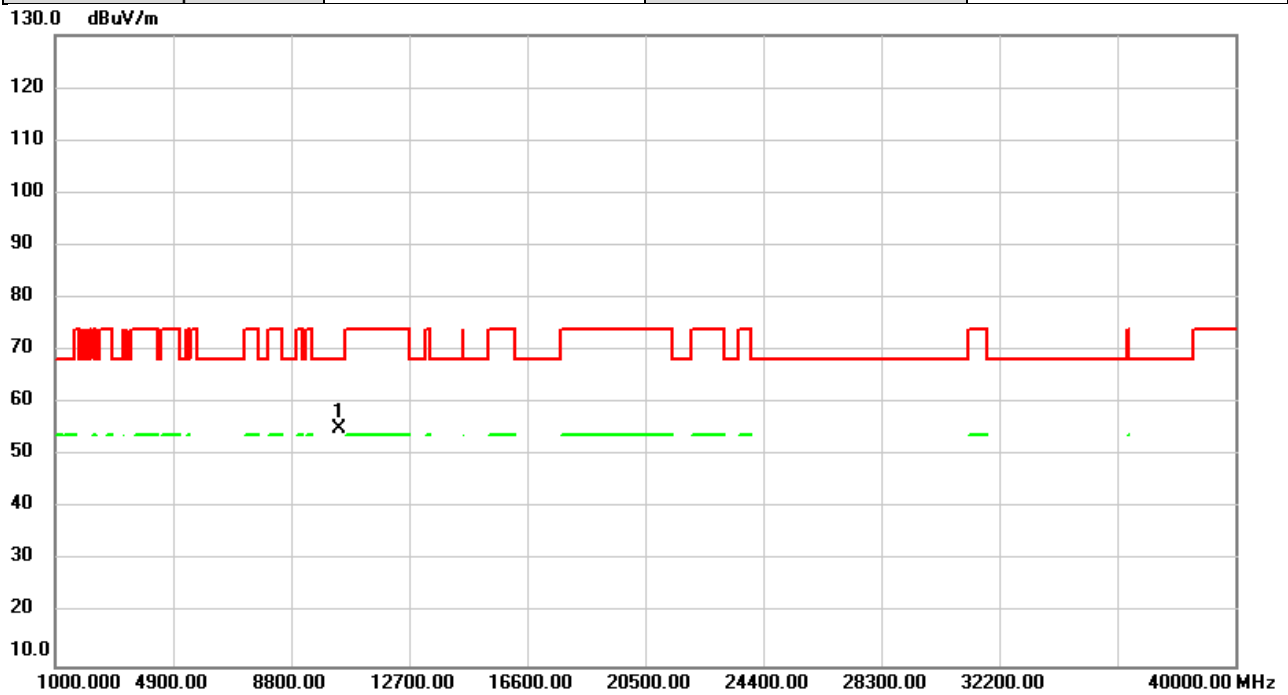


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	50.86	4.42	55.28	68.20	-12.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

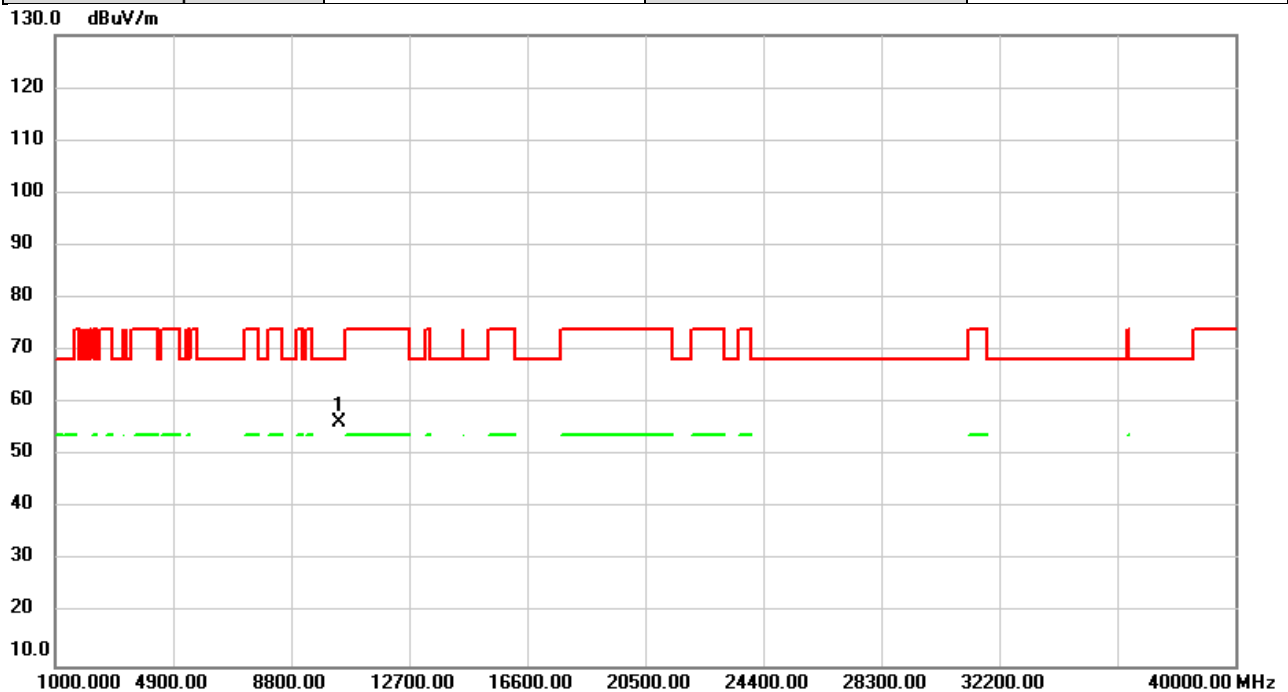


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	51.92	4.42	56.34	68.20	-11.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5200MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

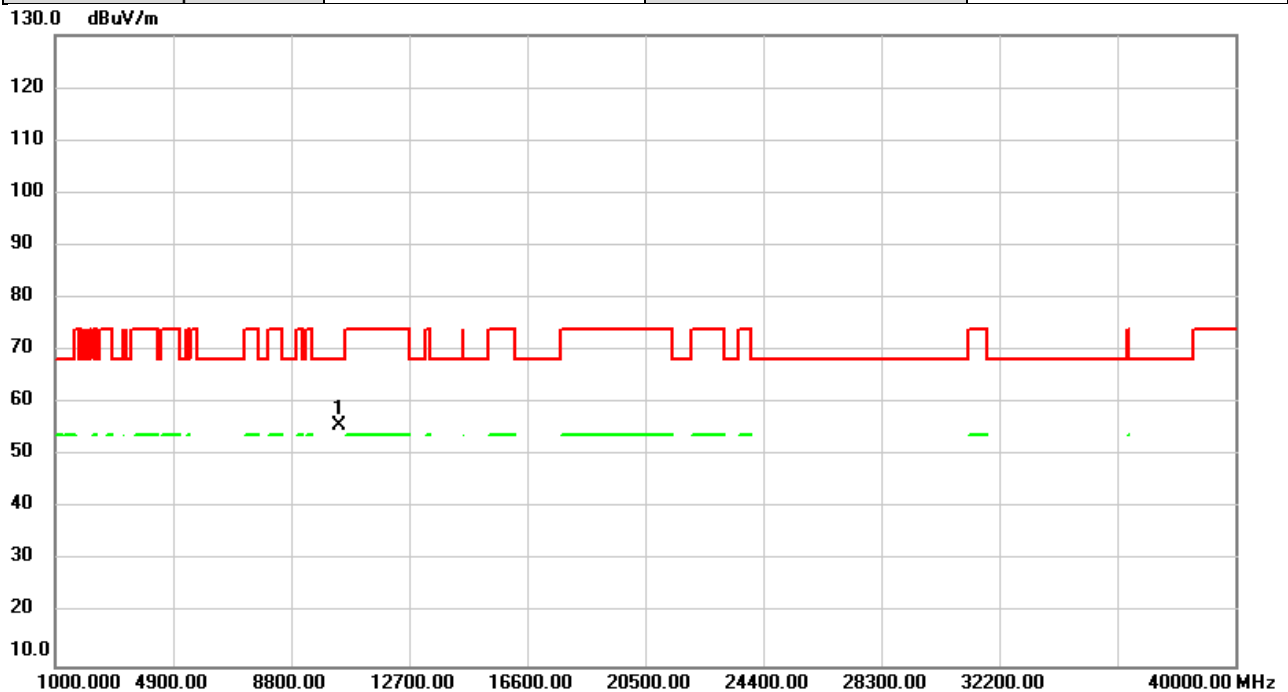


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	51.21	4.54	55.75	68.20	-12.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5200MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

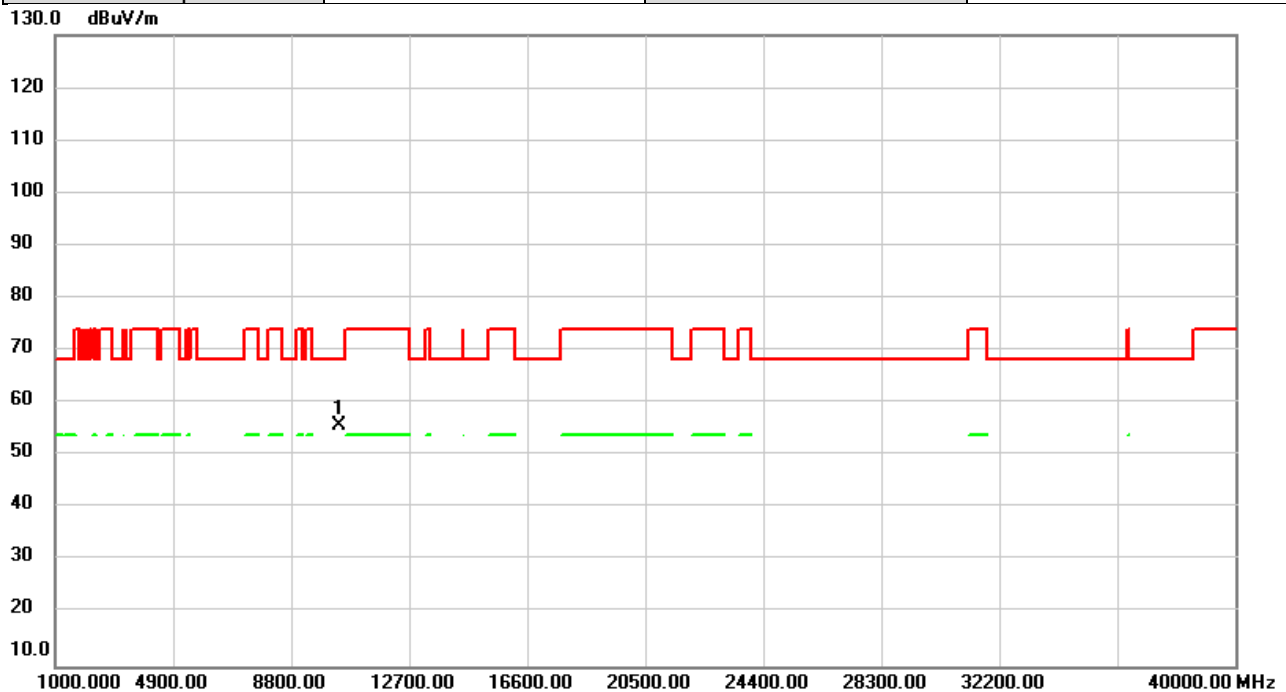


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	51.09	4.54	55.63	68.20	-12.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5240MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

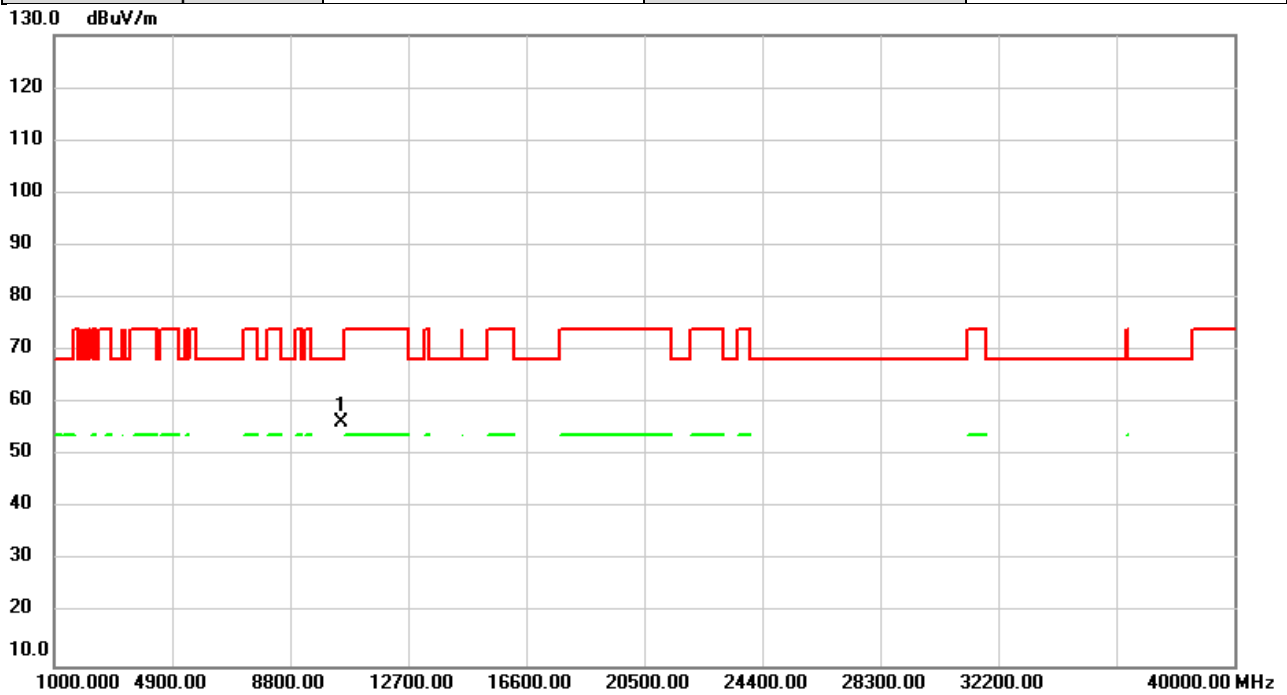


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	51.51	4.76	56.27	68.20	-11.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

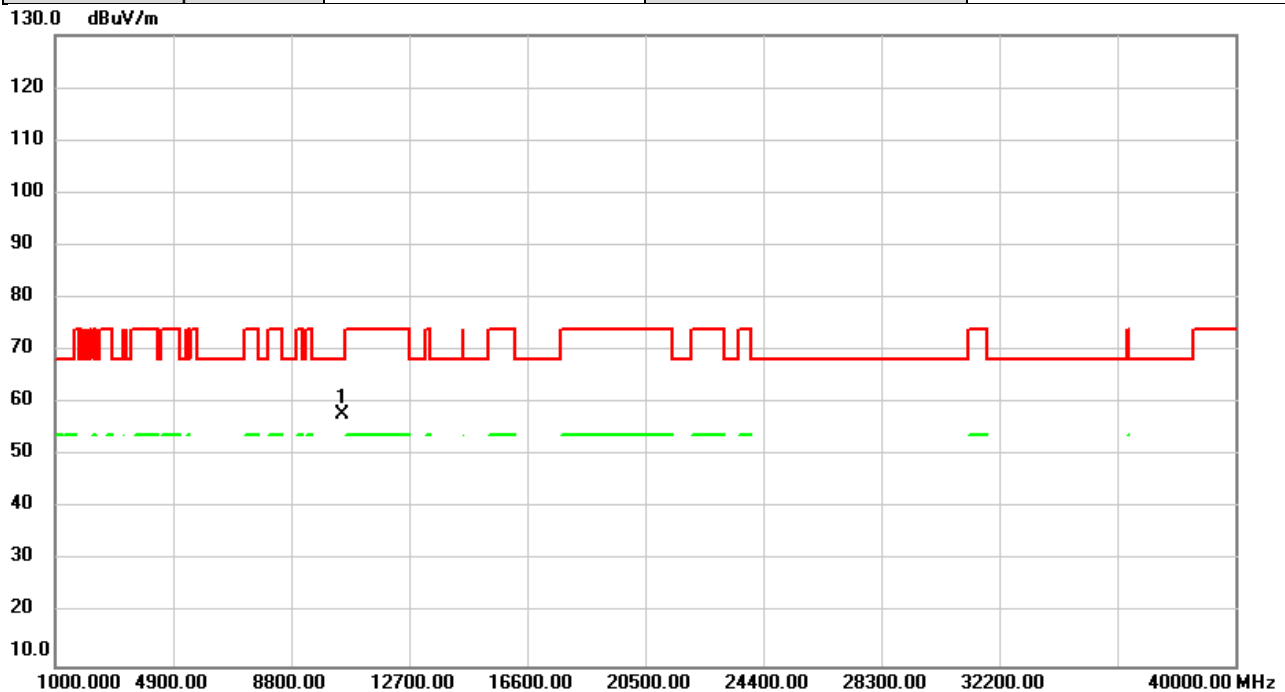


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	52.96	4.76	57.72	68.20	-10.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5260MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

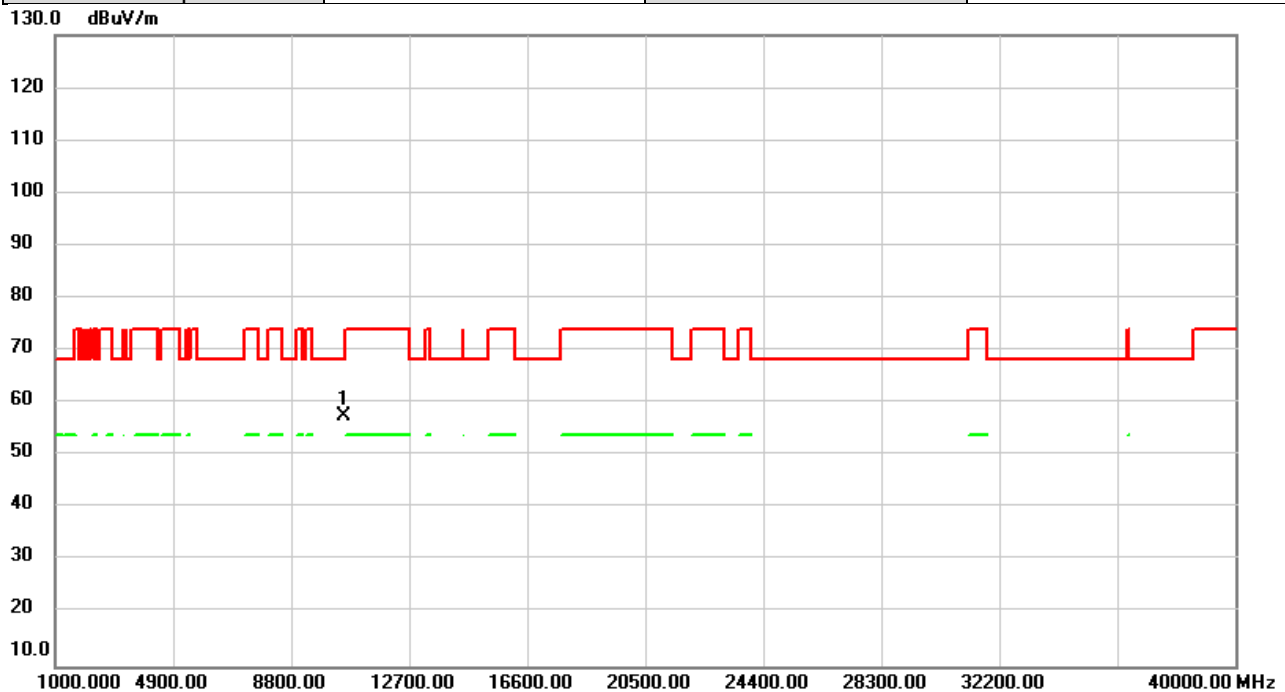


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	52.66	4.86	57.52	68.20	-10.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

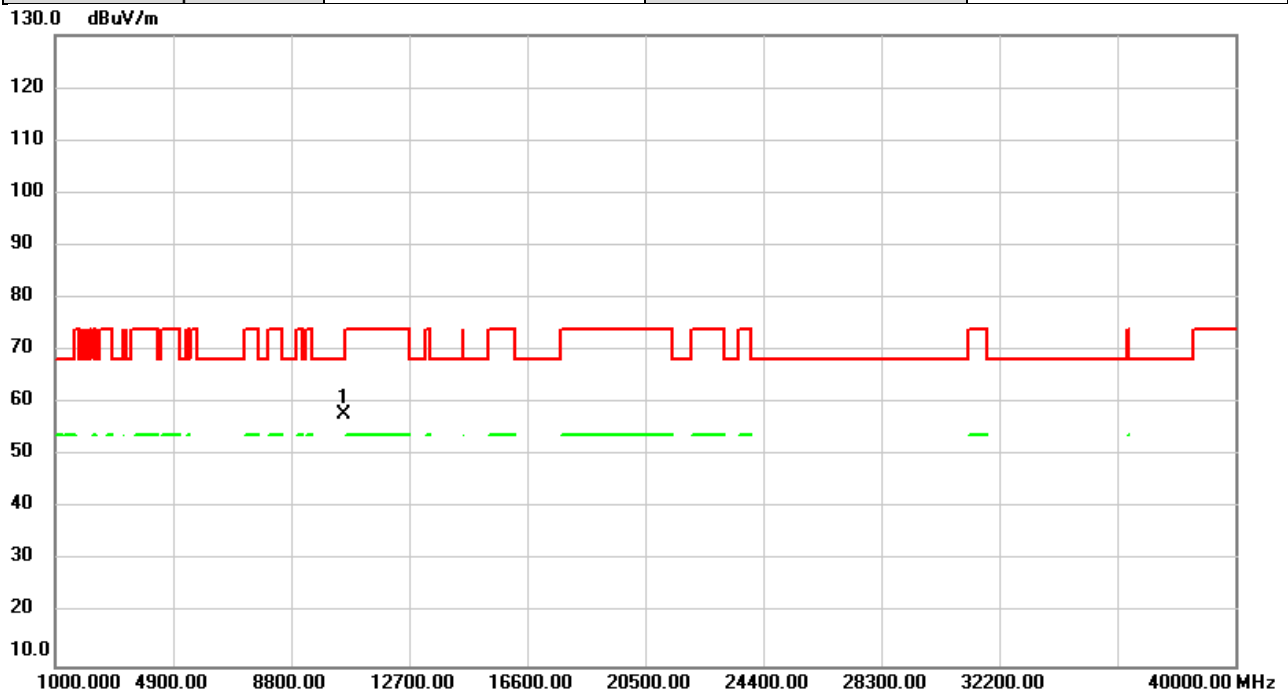


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	53.09	4.86	57.95	68.20	-10.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5300MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

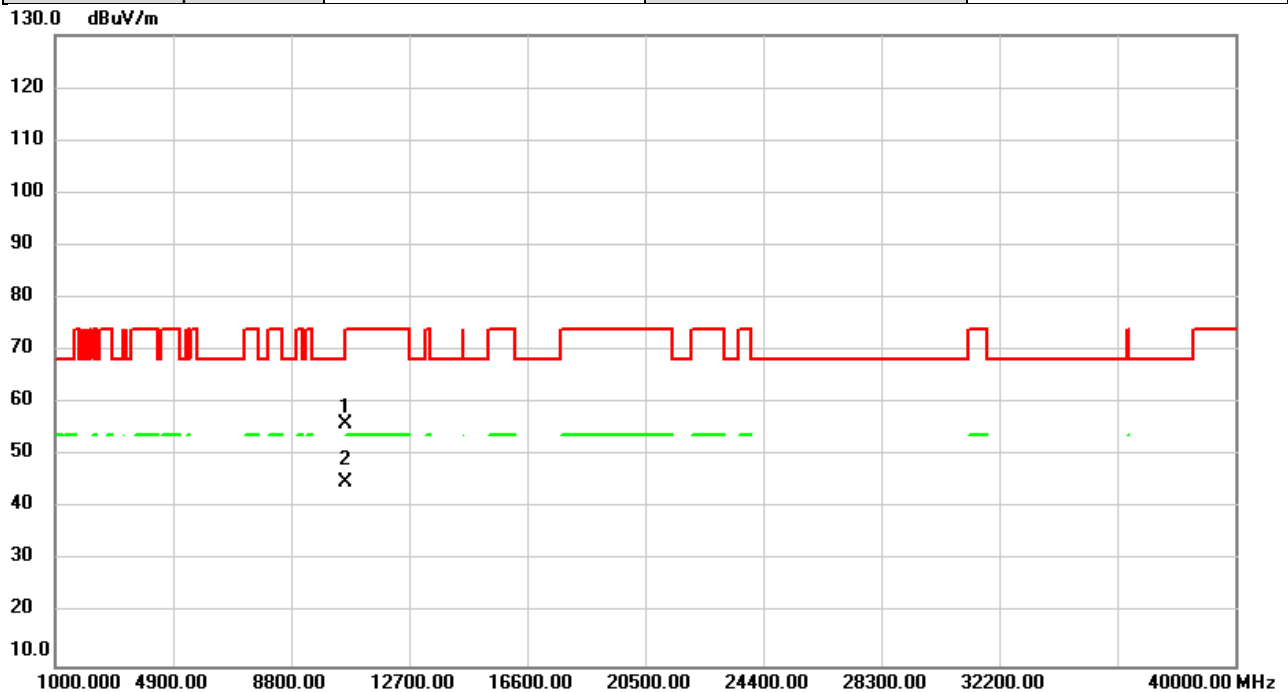


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	50.91	5.10	56.01	68.20	-12.19	peak	
2	*	10600.00	39.94	5.10	45.04	54.00	-8.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5300MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

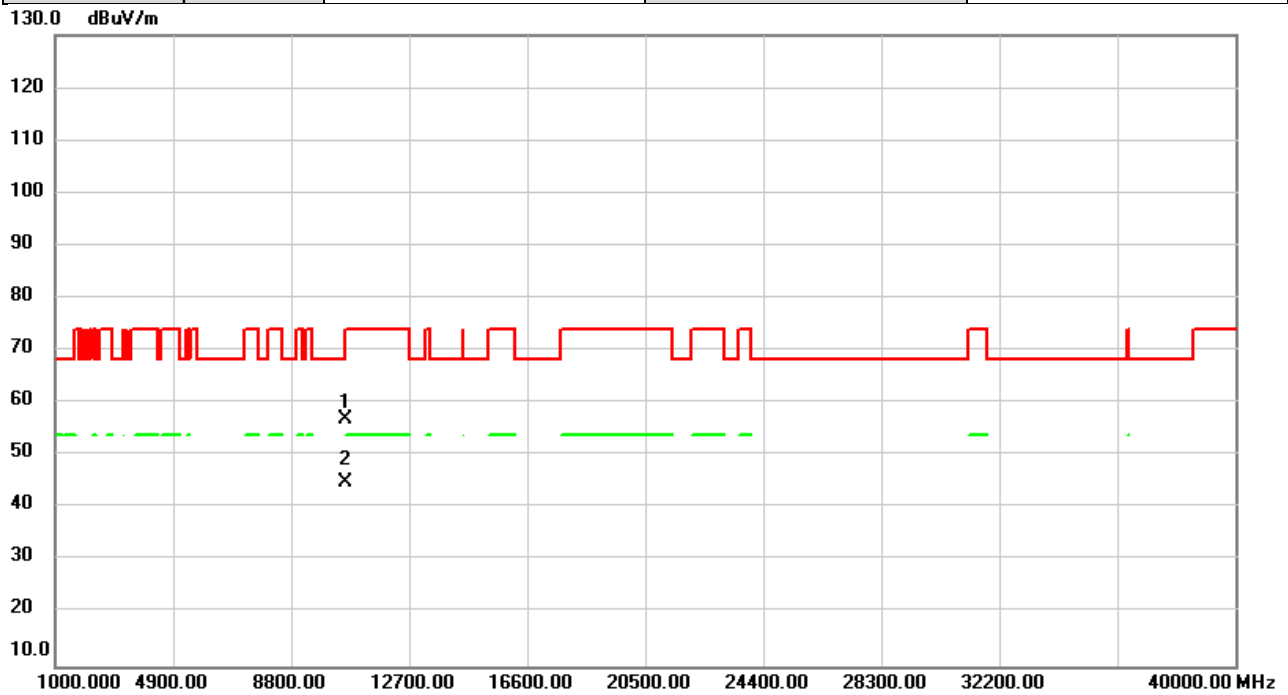


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	51.99	5.10	57.09	68.20	-11.11	peak	
2	*	10600.00	39.85	5.10	44.95	54.00	-9.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5320MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

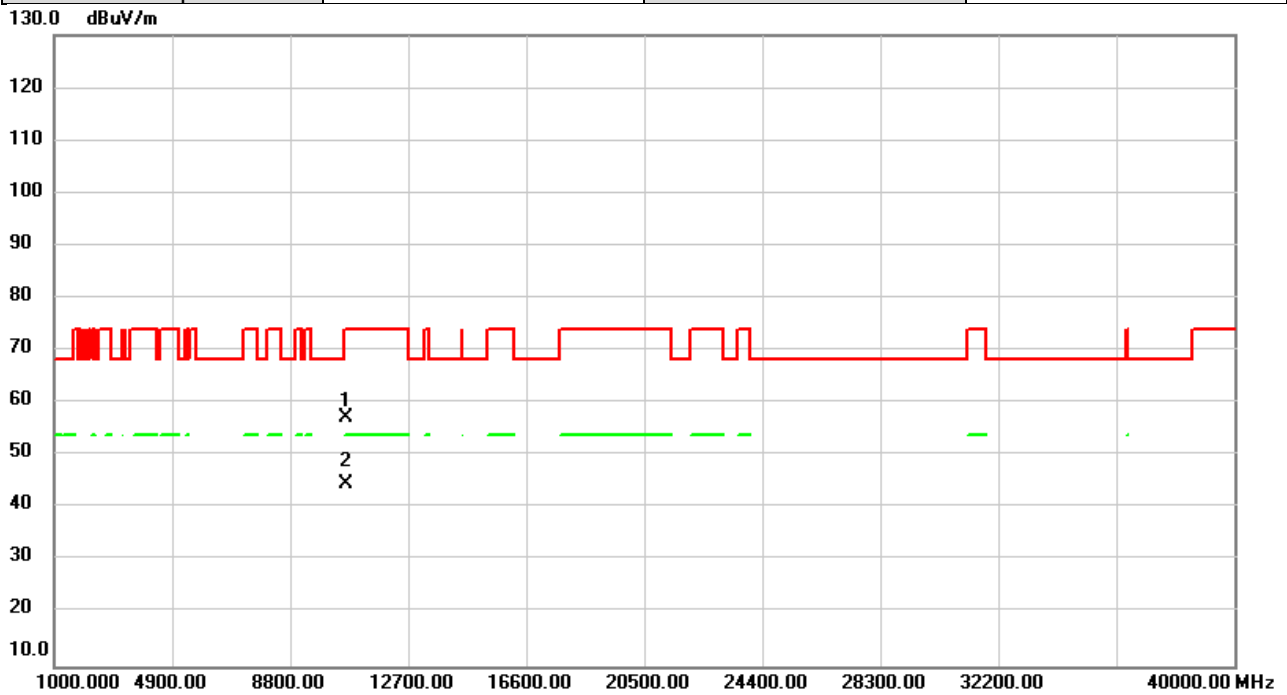


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	52.06	5.22	57.28	74.00	-16.72	peak	
2	*	10640.00	39.58	5.22	44.80	54.00	-9.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5320MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

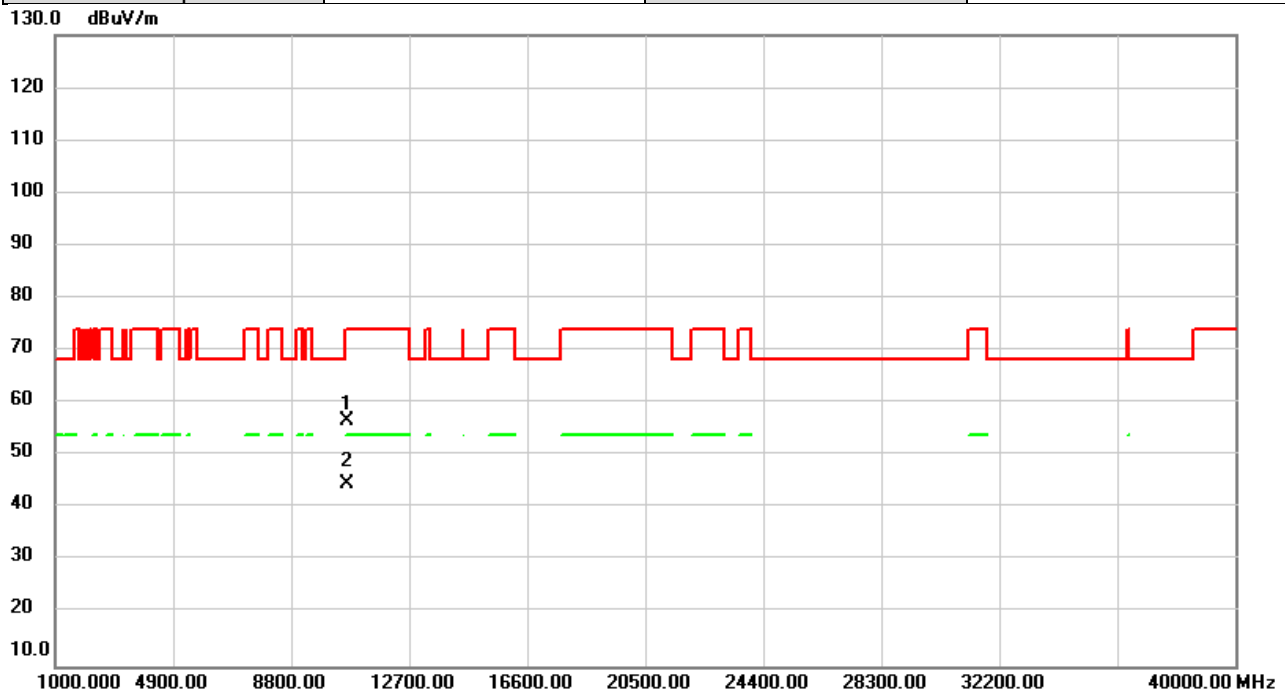


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	51.29	5.22	56.51	74.00	-17.49	peak	
2	*	10640.00	39.53	5.22	44.75	54.00	-9.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5500MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

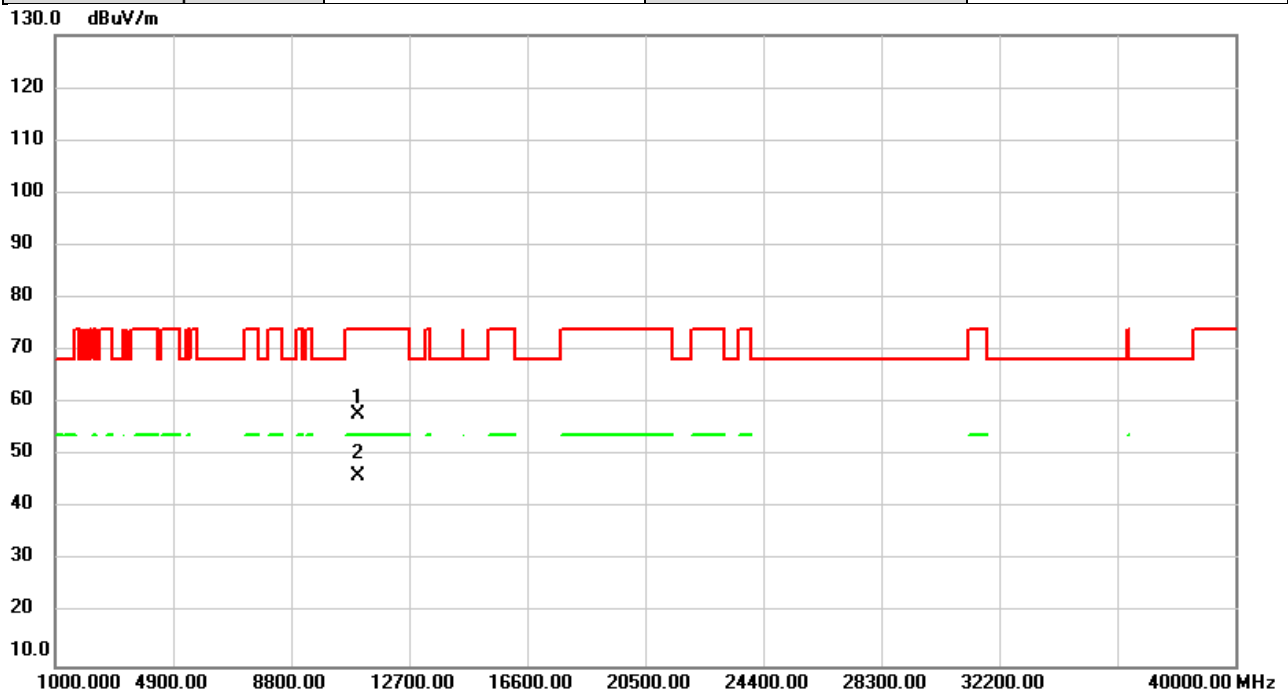


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	51.68	6.27	57.95	74.00	-16.05	peak	
2	*	11000.00	39.98	6.27	46.25	54.00	-7.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5500MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

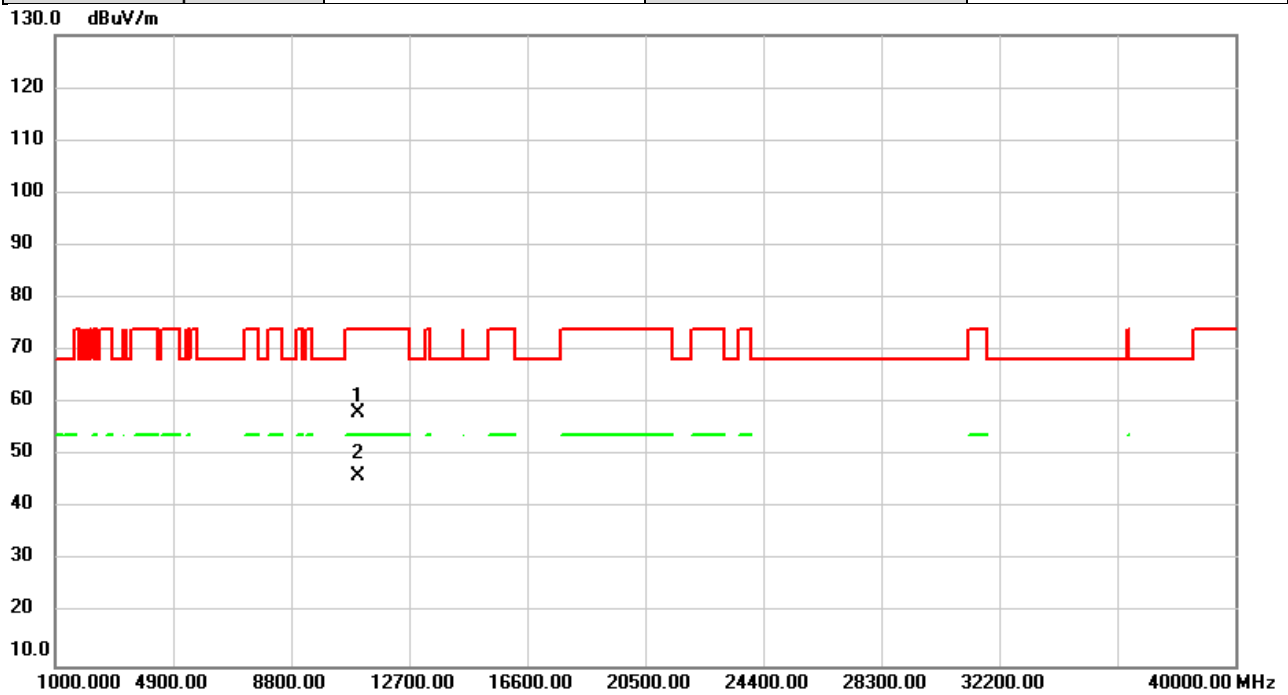


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	51.97	6.27	58.24	74.00	-15.76	peak	
2	*	11000.00	39.90	6.27	46.17	54.00	-7.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5580MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

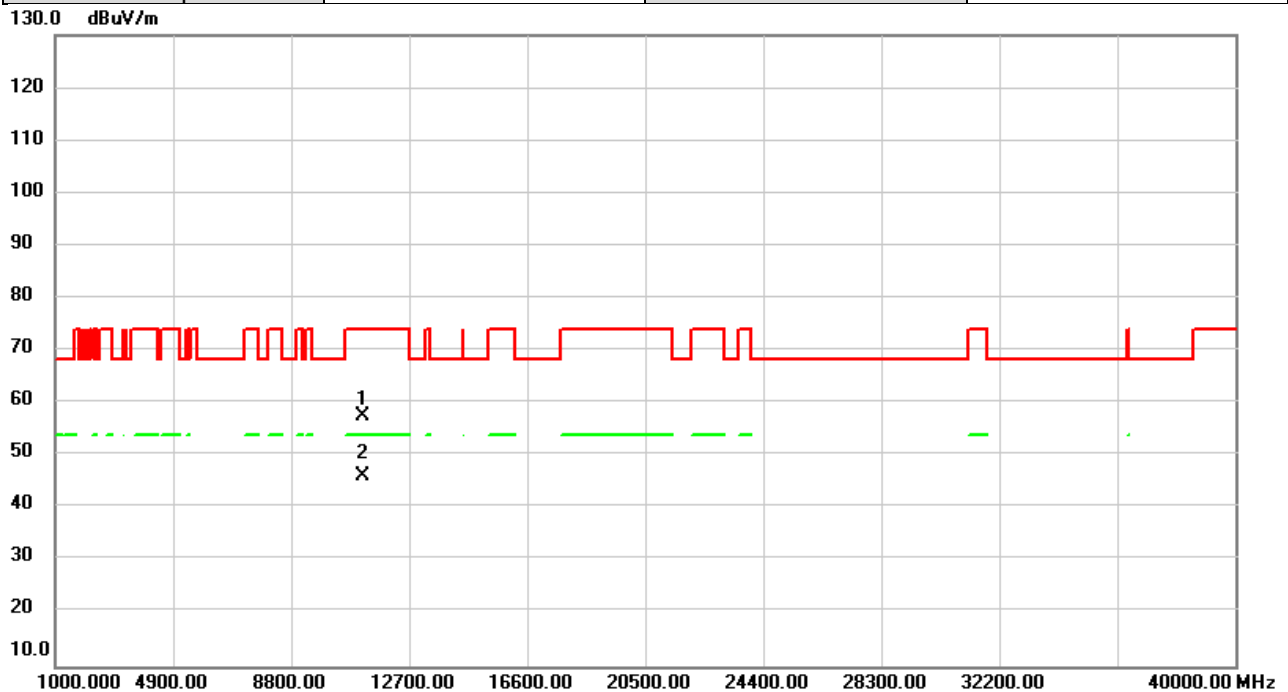


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	51.63	5.93	57.56	74.00	-16.44	peak	
2	*	11160.00	40.27	5.93	46.20	54.00	-7.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5580MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

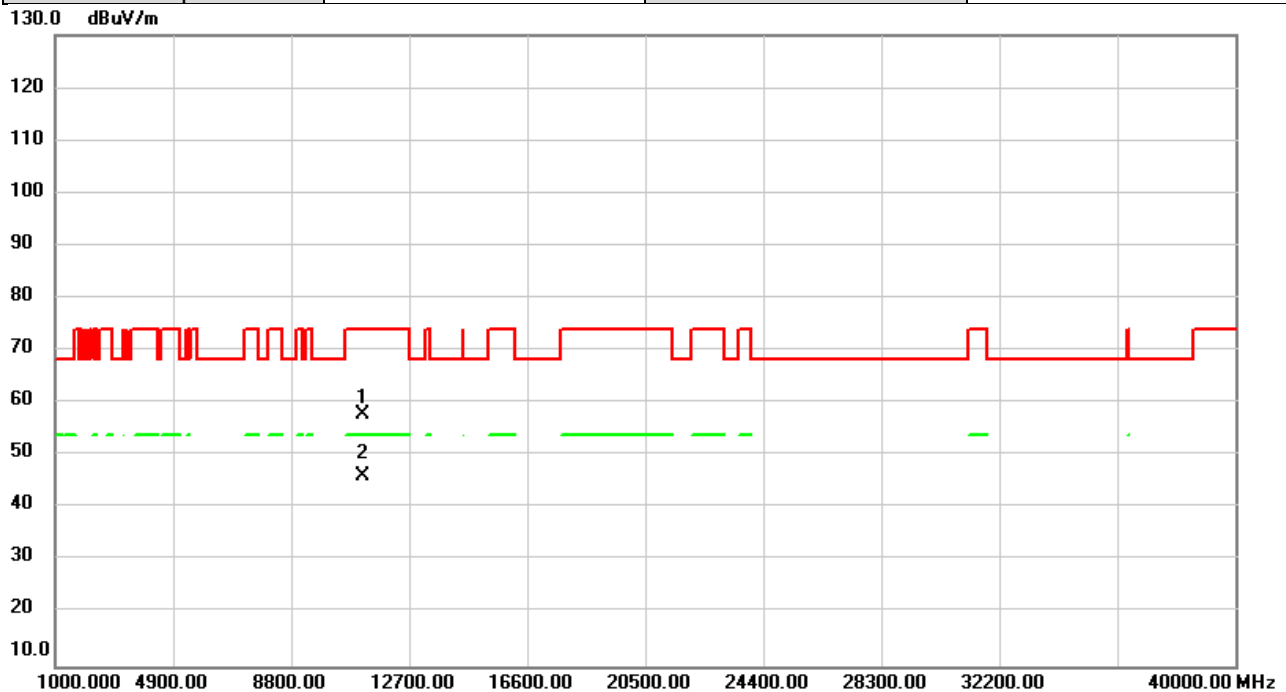


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	52.03	5.93	57.96	74.00	-16.04	peak	
2	*	11160.00	40.35	5.93	46.28	54.00	-7.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5700MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

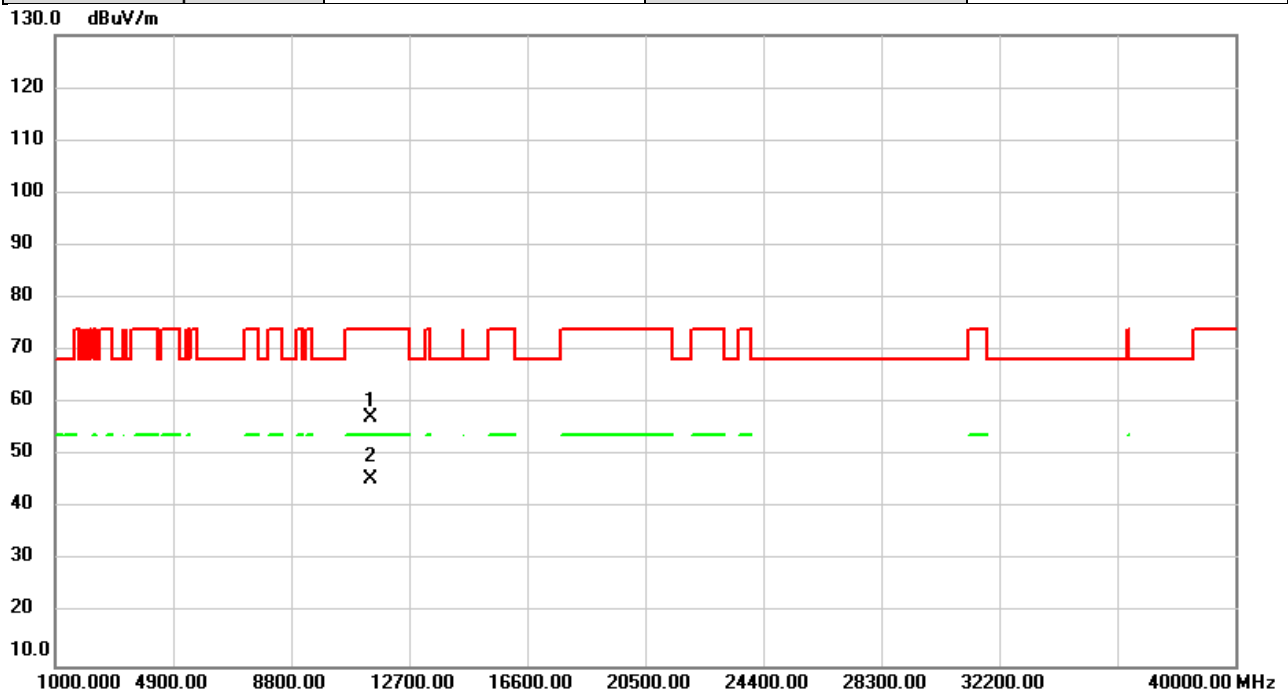


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	51.83	5.44	57.27	74.00	-16.73	peak	
2	*	11400.00	39.98	5.44	45.42	54.00	-8.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5700MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

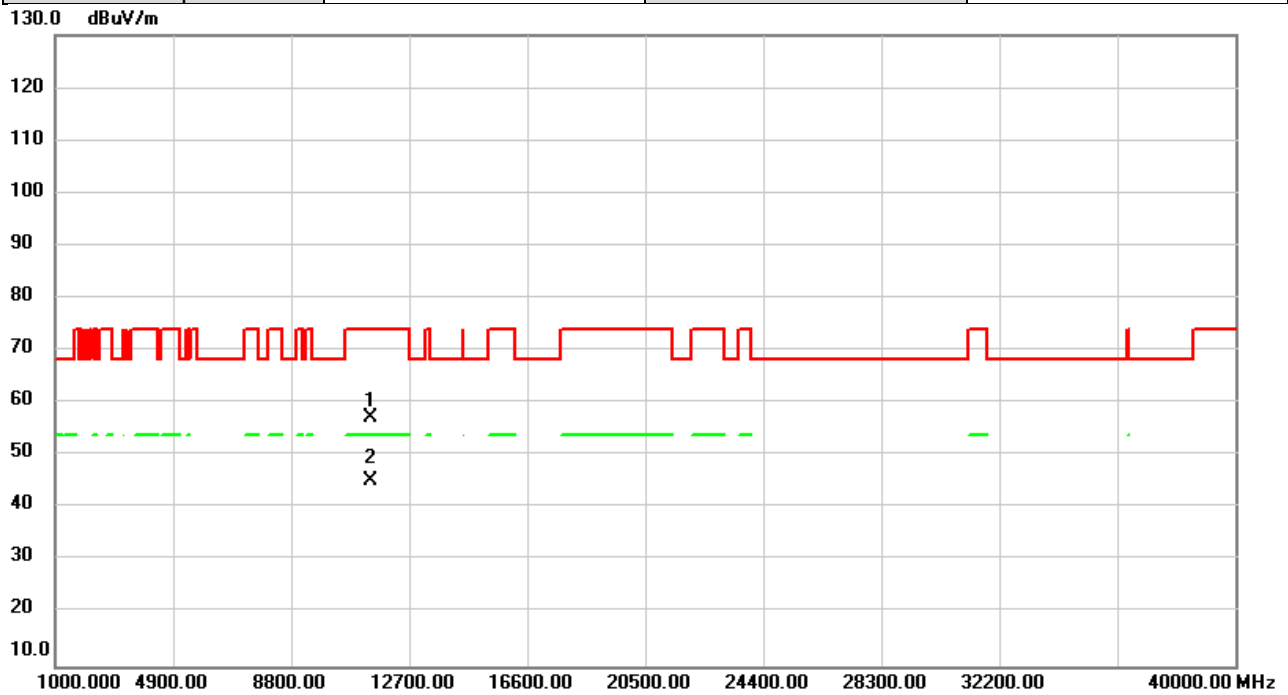


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	51.90	5.44	57.34	74.00	-16.66	peak	
2	*	11400.00	39.92	5.44	45.36	54.00	-8.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5720MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

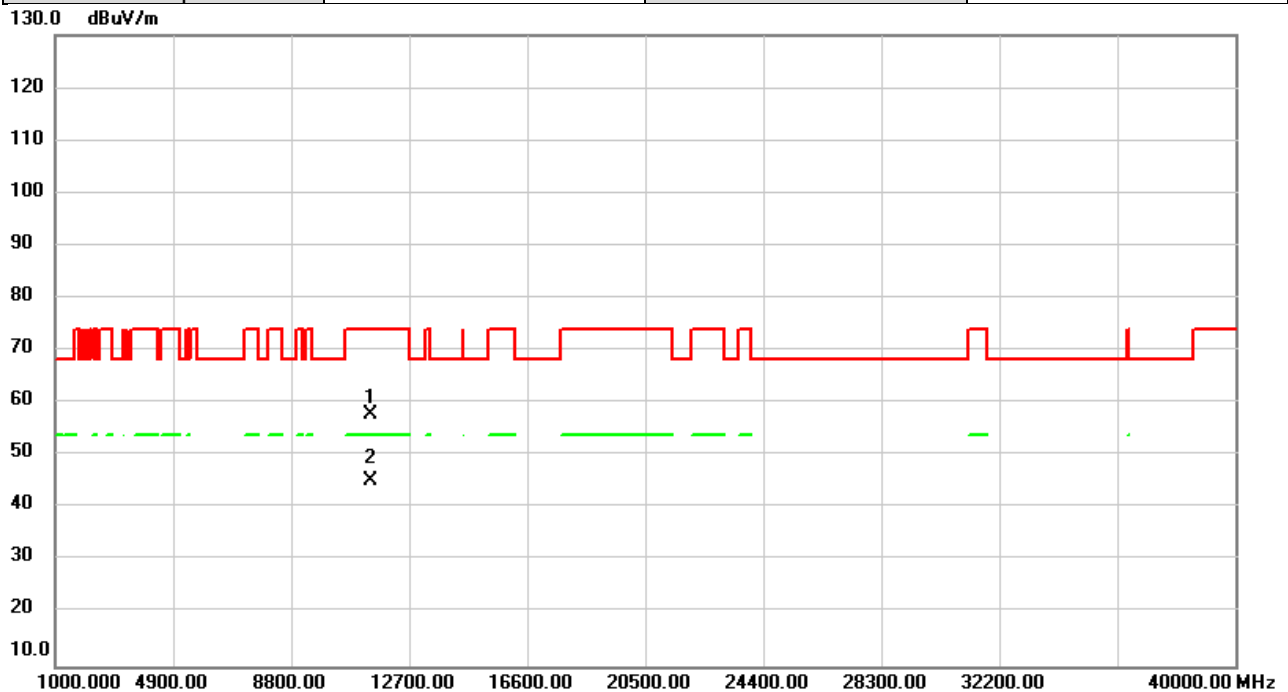


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	52.42	5.36	57.78	74.00	-16.22	peak	
2	*	11440.00	39.99	5.36	45.35	54.00	-8.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5720MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

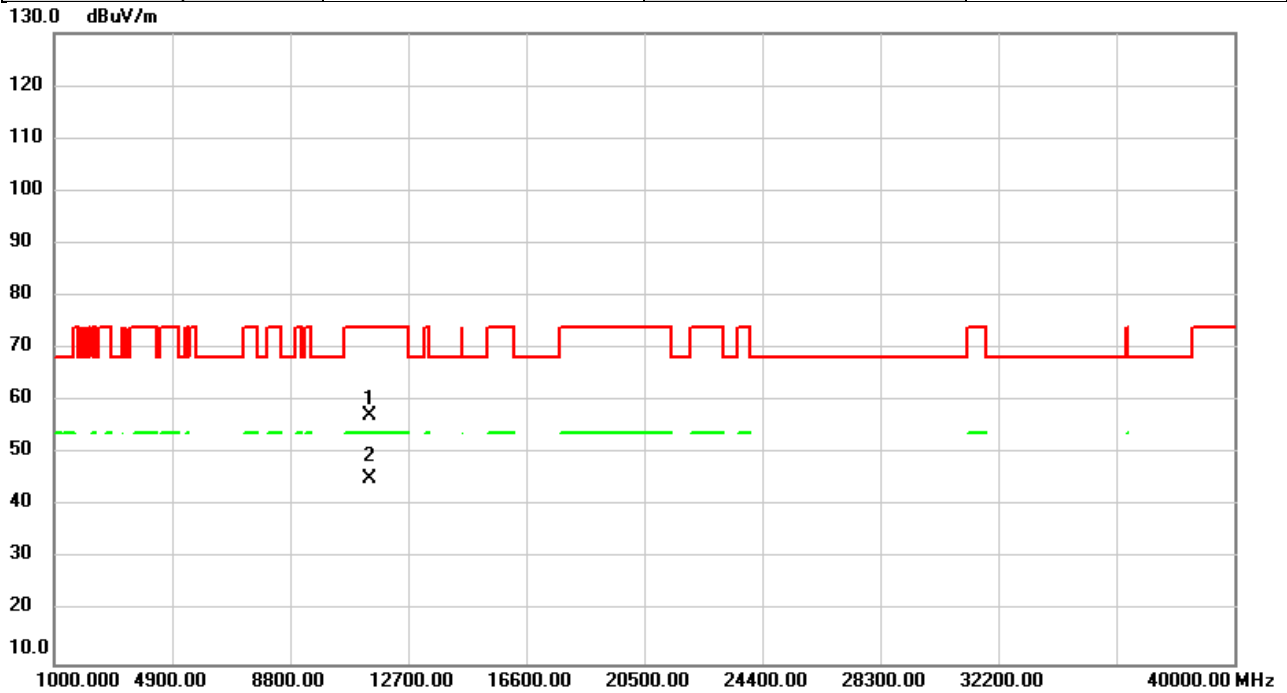


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	52.03	5.36	57.39	74.00	-16.61	peak	
2	*	11440.00	39.91	5.36	45.27	54.00	-8.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

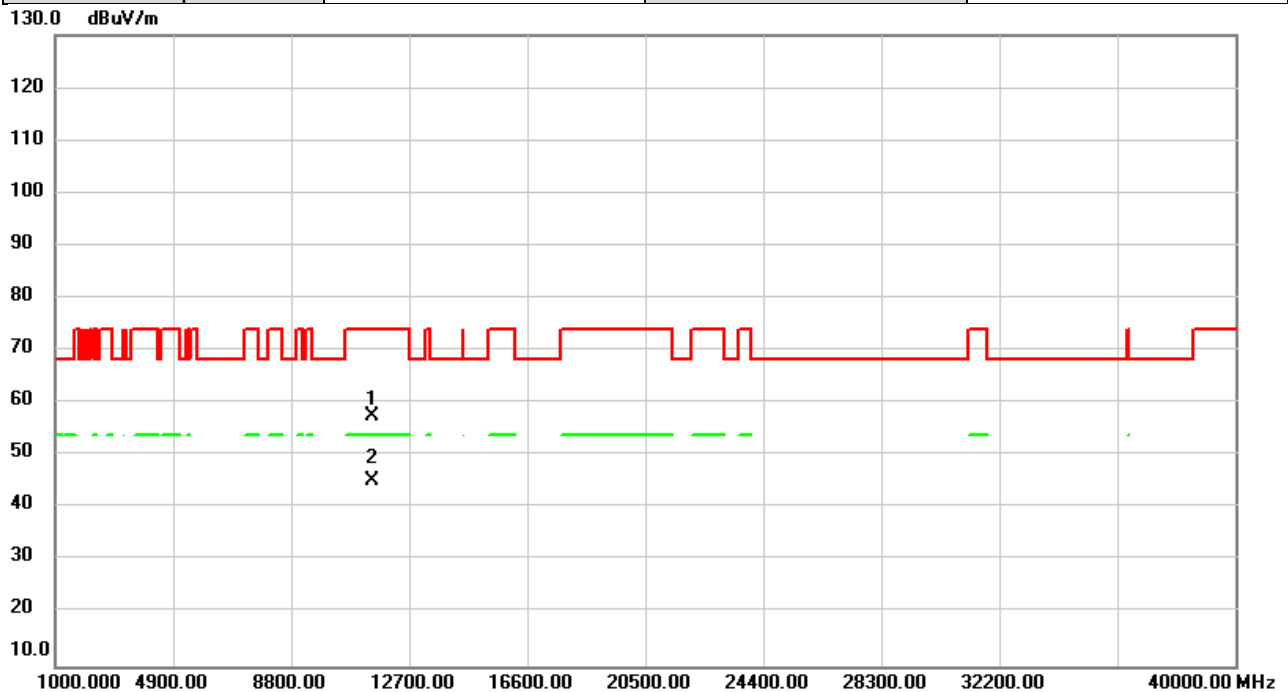


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	52.24	5.26	57.50	74.00	-16.50	peak	
2	*	11490.00	40.08	5.26	45.34	54.00	-8.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

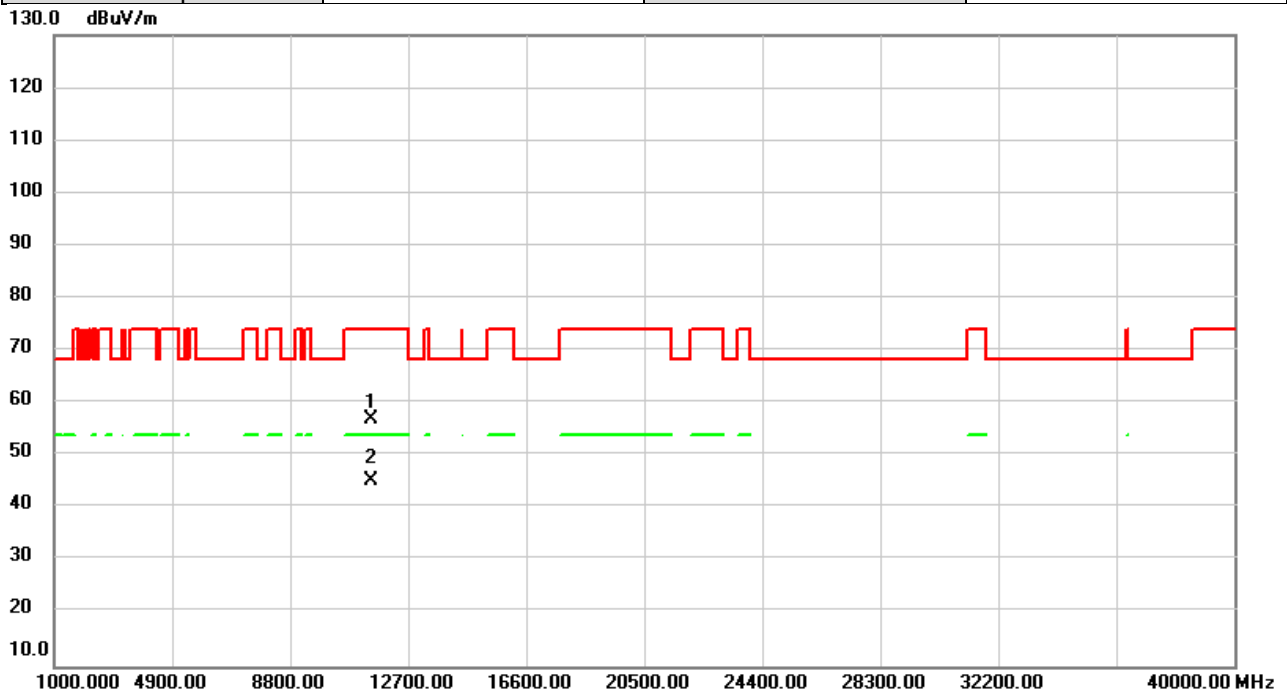


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	51.80	5.26	57.06	74.00	-16.94	peak	
2	*	11490.00	39.91	5.26	45.17	54.00	-8.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5785MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

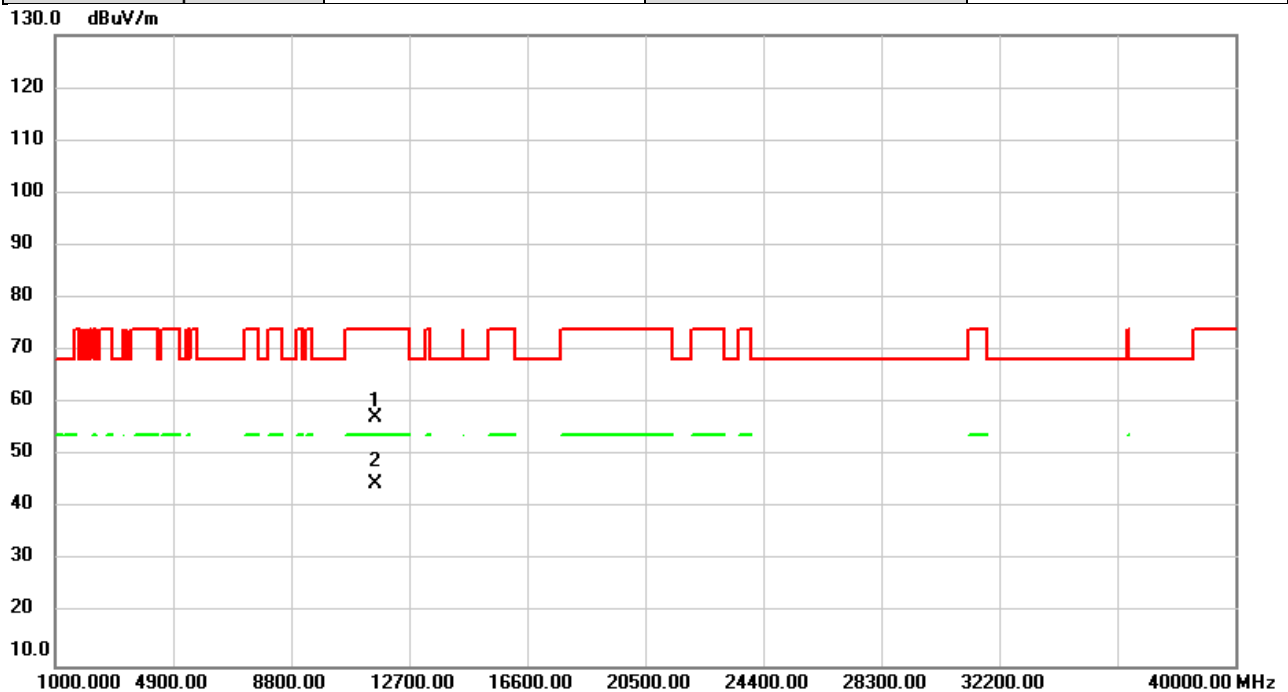


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	52.18	5.06	57.24	74.00	-16.76	peak	
2	*	11570.00	39.72	5.06	44.78	54.00	-9.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5785MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

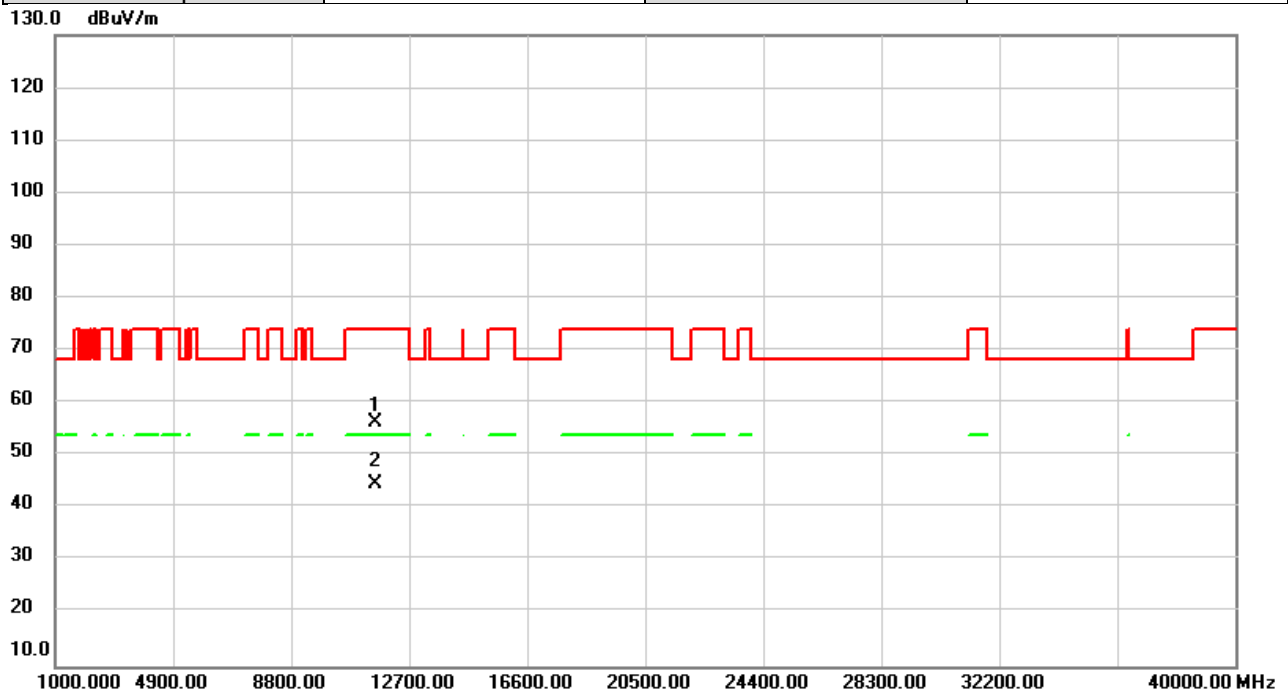


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	51.42	5.06	56.48	74.00	-17.52	peak	
2	*	11570.00	39.71	5.06	44.77	54.00	-9.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5825MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

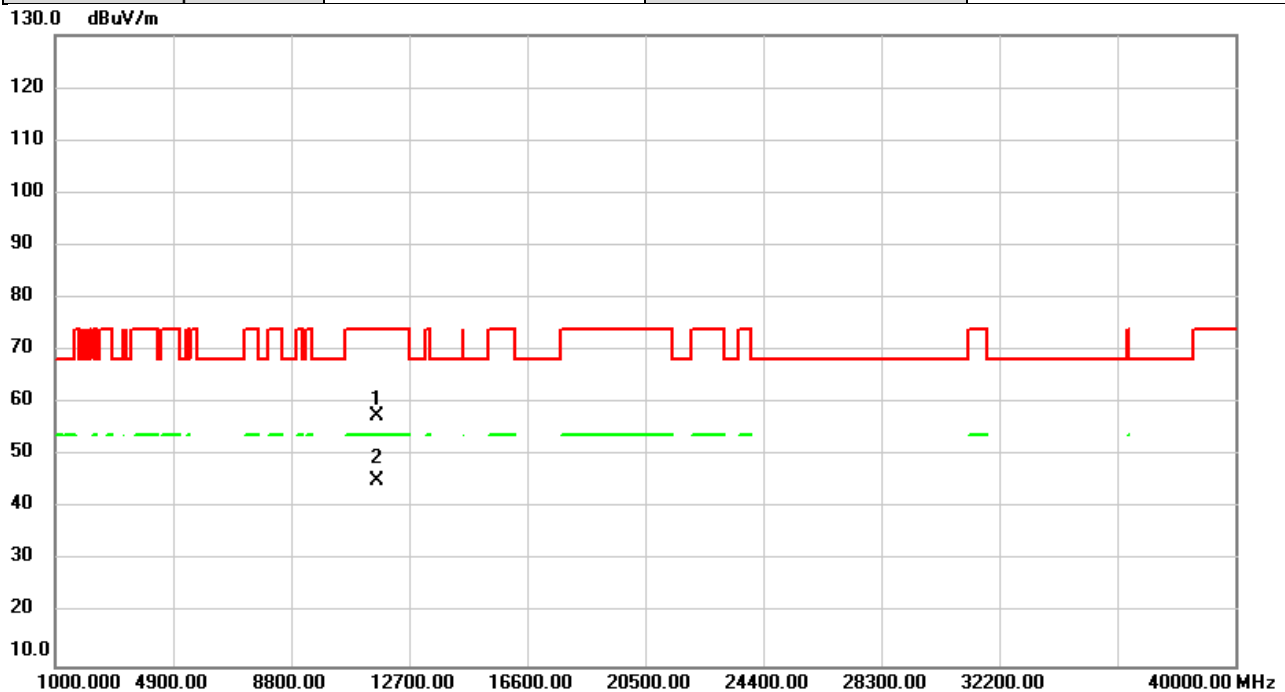


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	52.64	4.85	57.49	74.00	-16.51	peak	
2	*	11650.00	40.35	4.85	45.20	54.00	-8.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11a	Test Date	2021/11/4
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

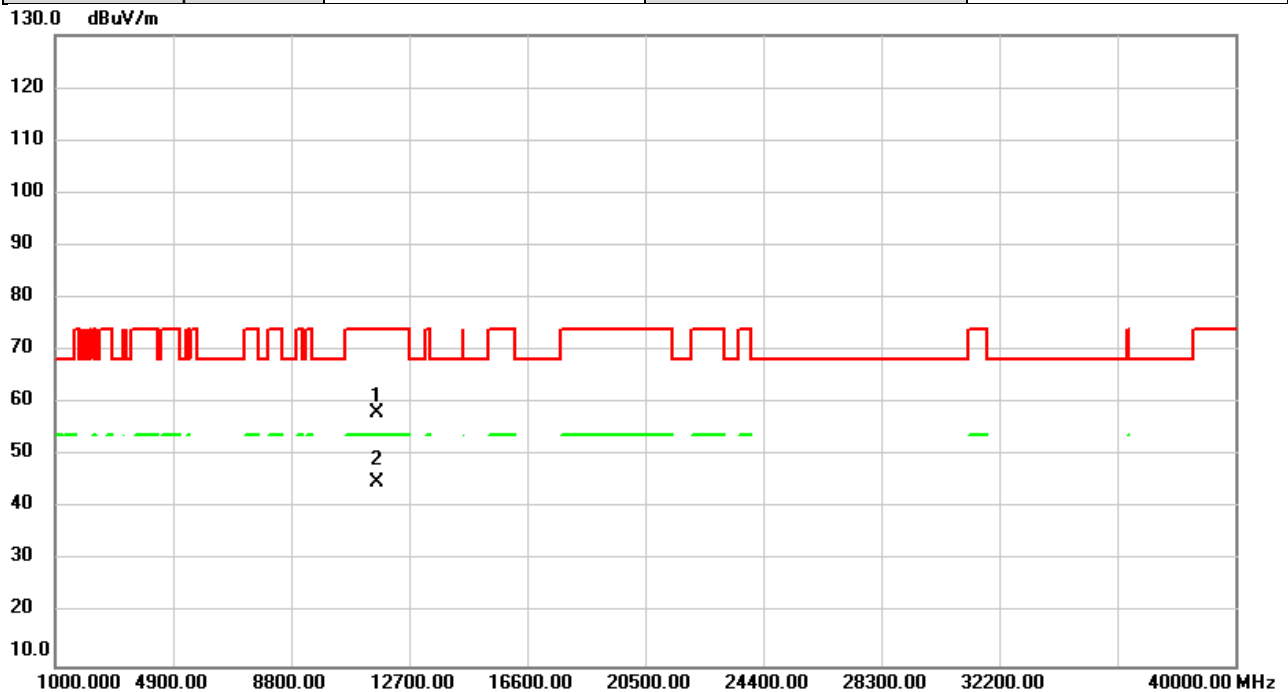


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	53.21	4.85	58.06	74.00	-15.94	peak	
2	*	11650.00	40.20	4.85	45.05	54.00	-8.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5180MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

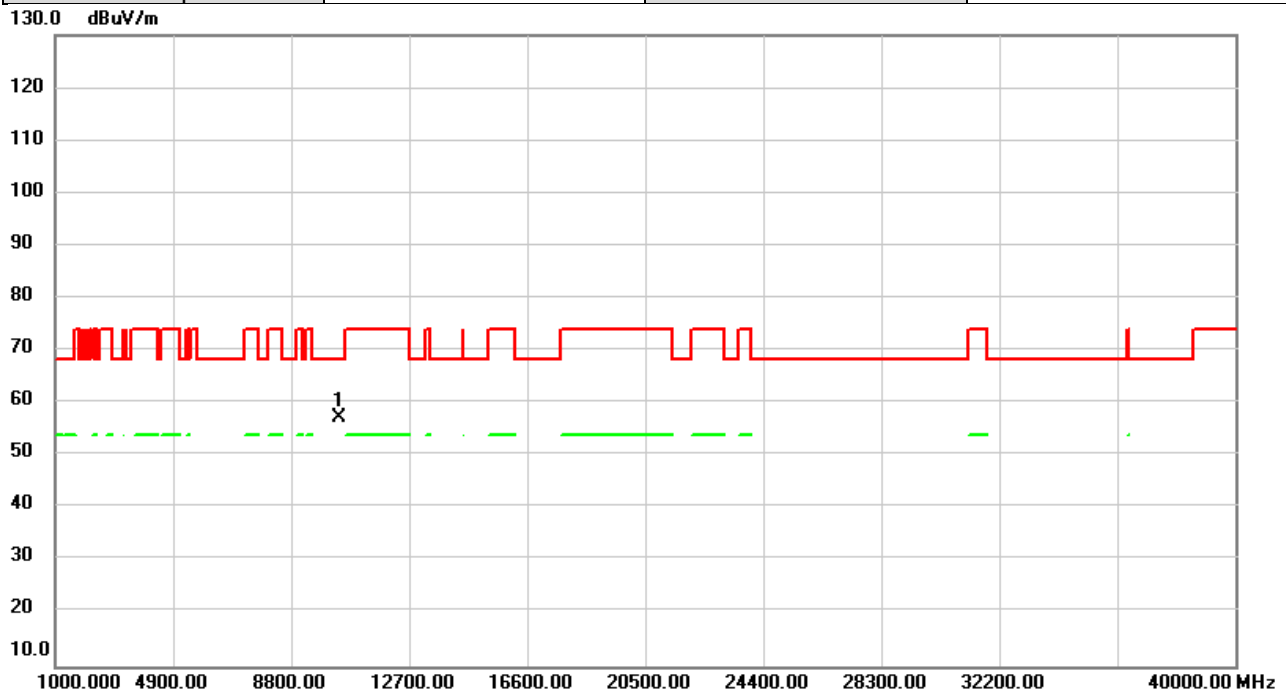


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	52.94	4.42	57.36	68.20	-10.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

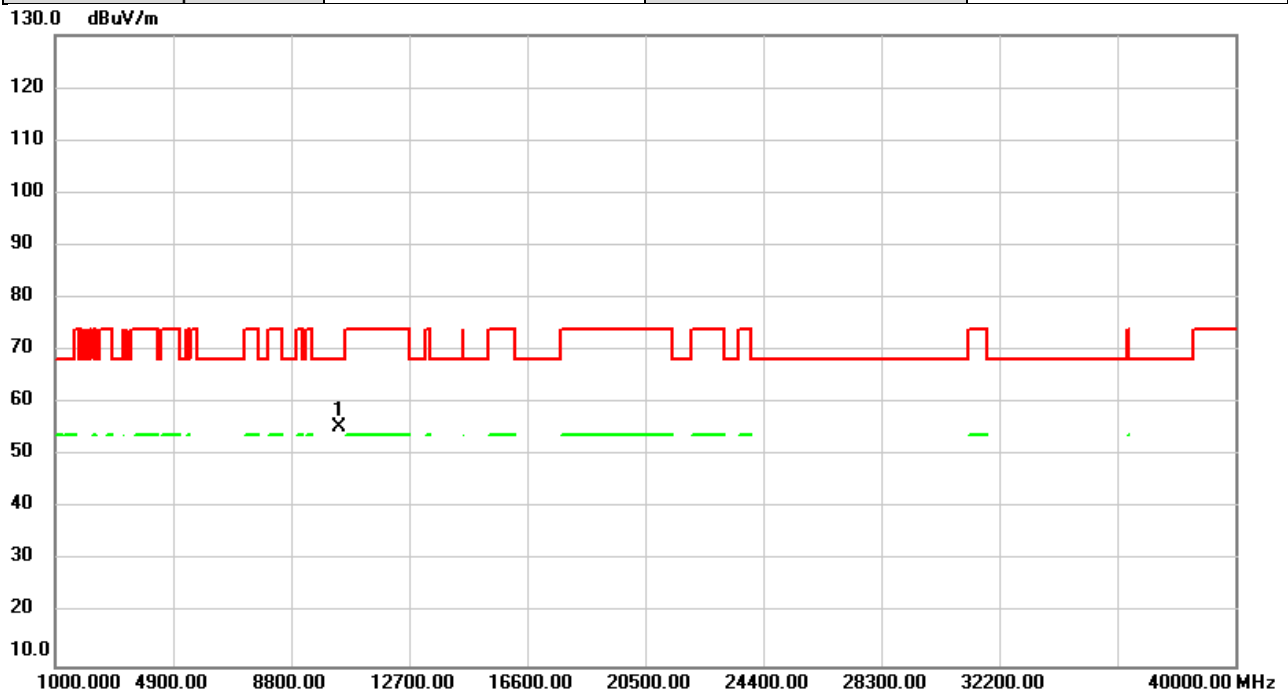


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	50.93	4.42	55.35	68.20	-12.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5200MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

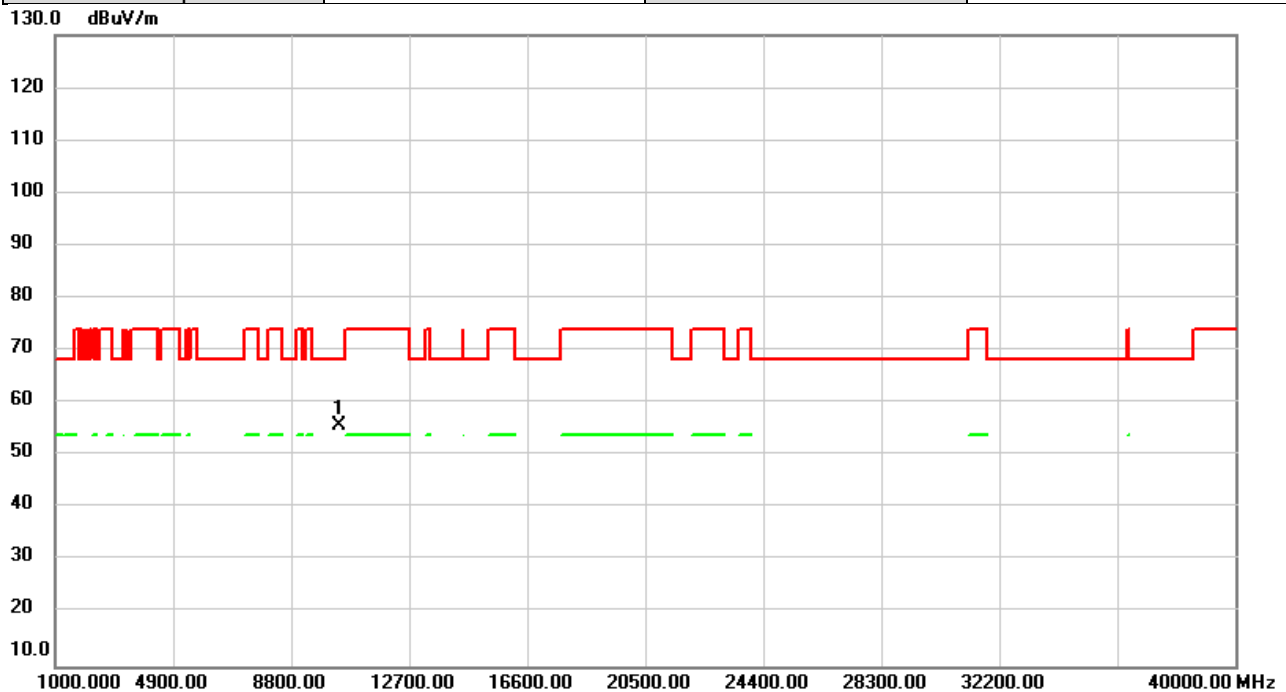


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	51.29	4.54	55.83	68.20	-12.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5200MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

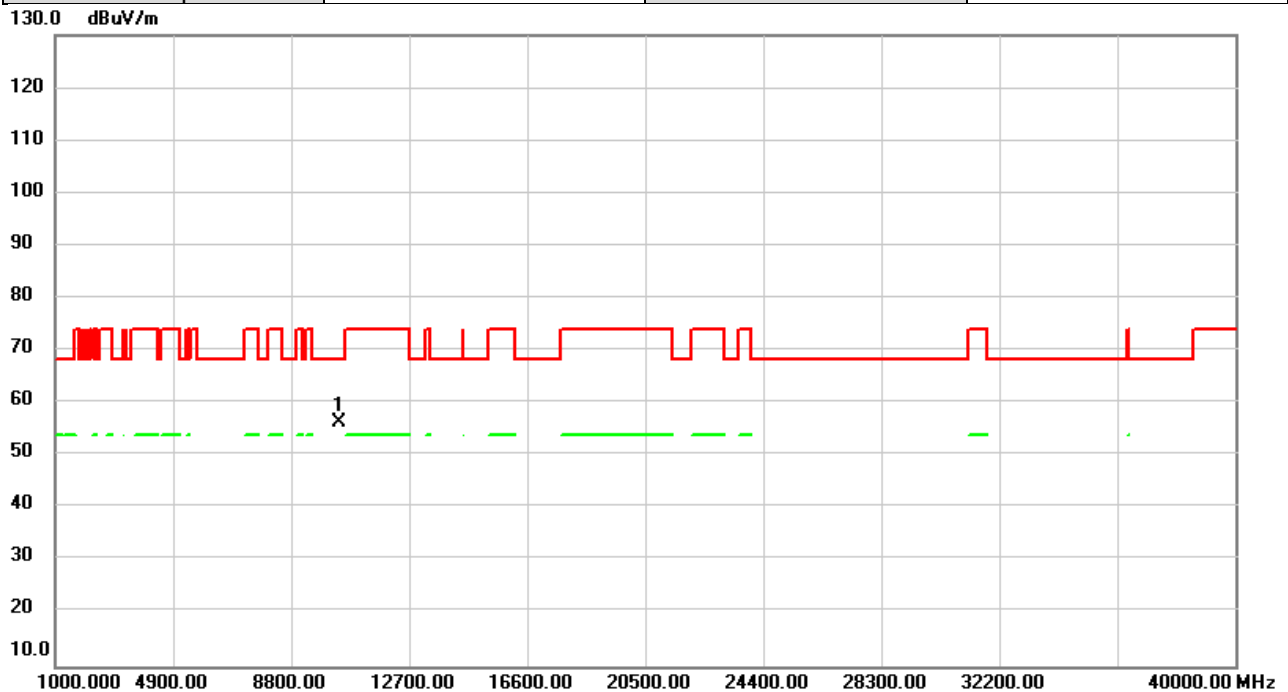


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	51.82	4.54	56.36	68.20	-11.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5240MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

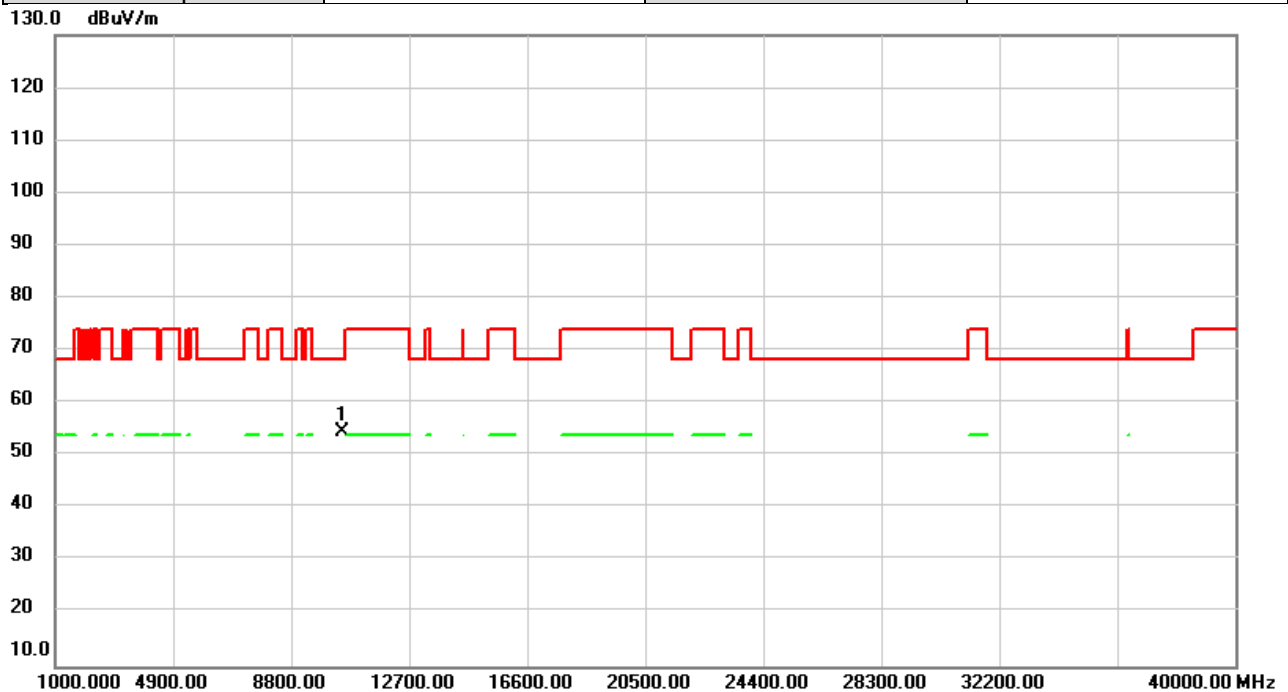


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	49.71	4.76	54.47	68.20	-13.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

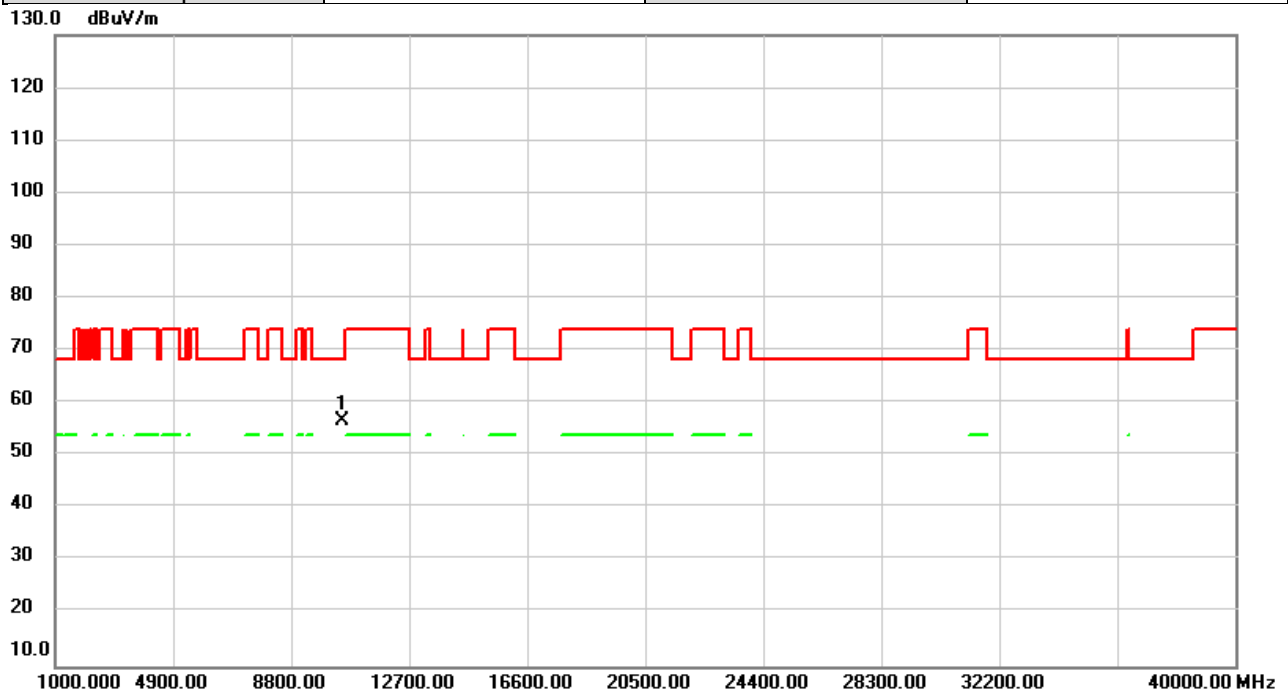


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	51.77	4.76	56.53	68.20	-11.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5260MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

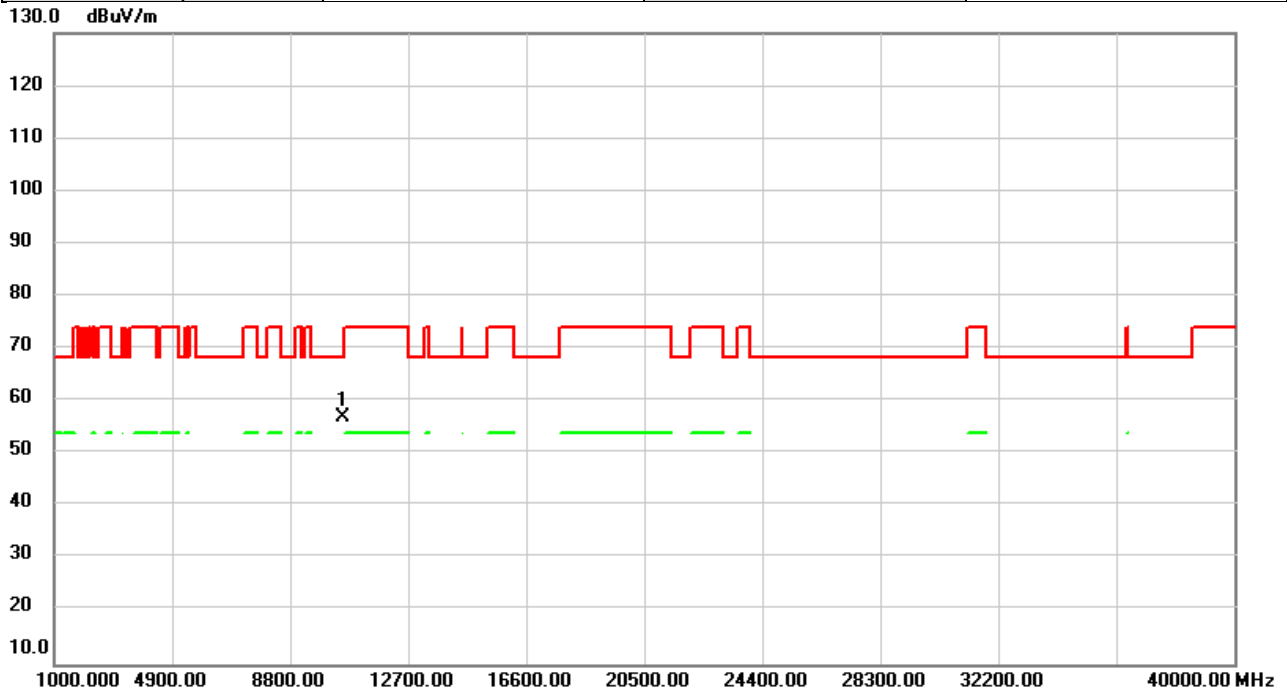


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	52.17	4.86	57.03	68.20	-11.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

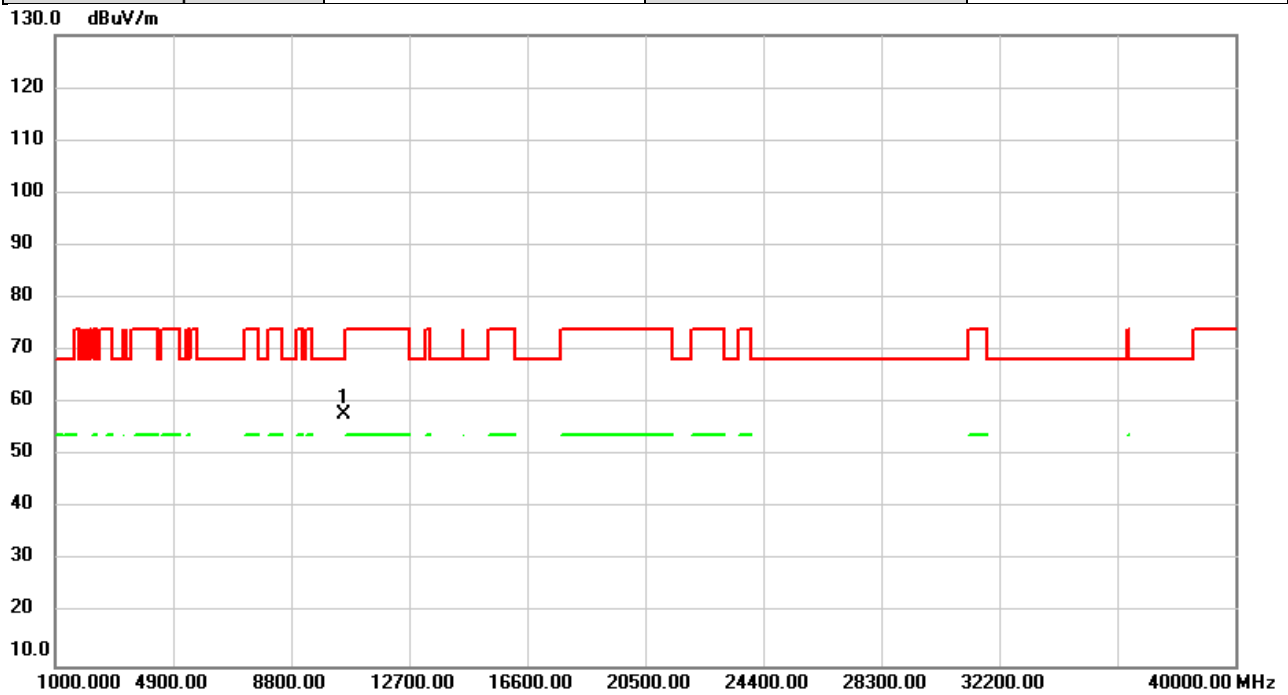


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10520.00	52.85	4.86	57.71	68.20	-10.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5300MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

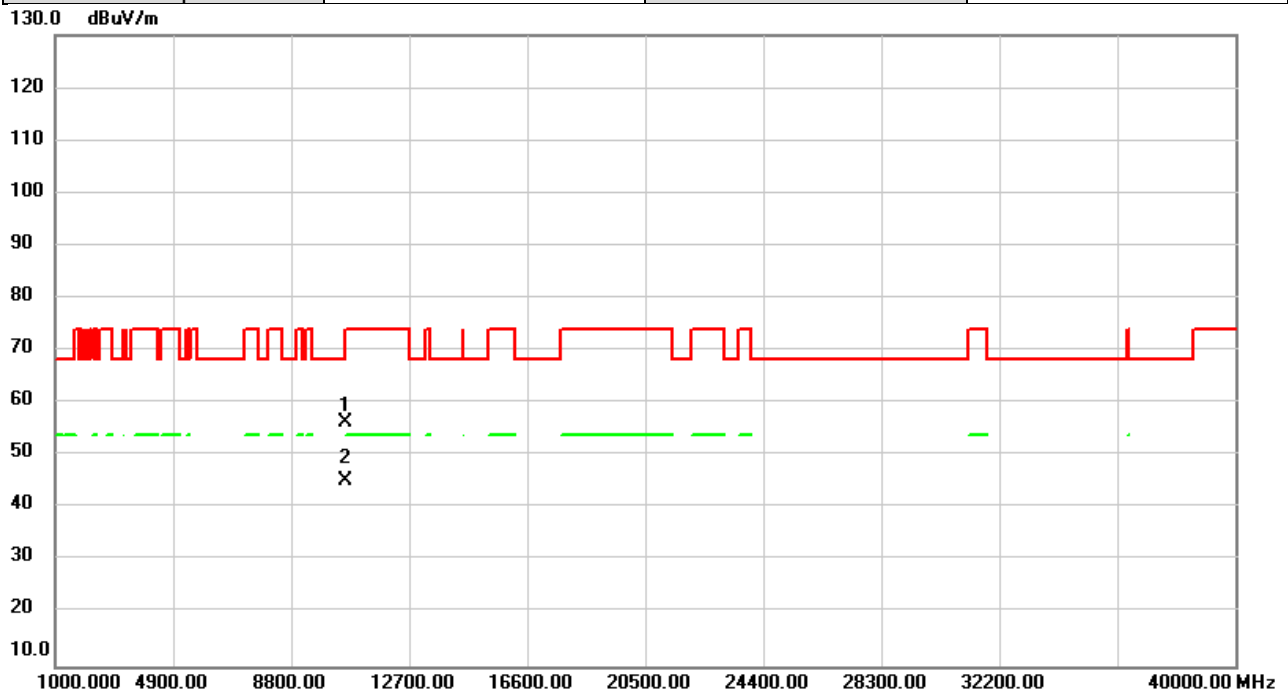


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	51.39	5.10	56.49	68.20	-11.71	peak	
2	*	10600.00	40.06	5.10	45.16	54.00	-8.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5300MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

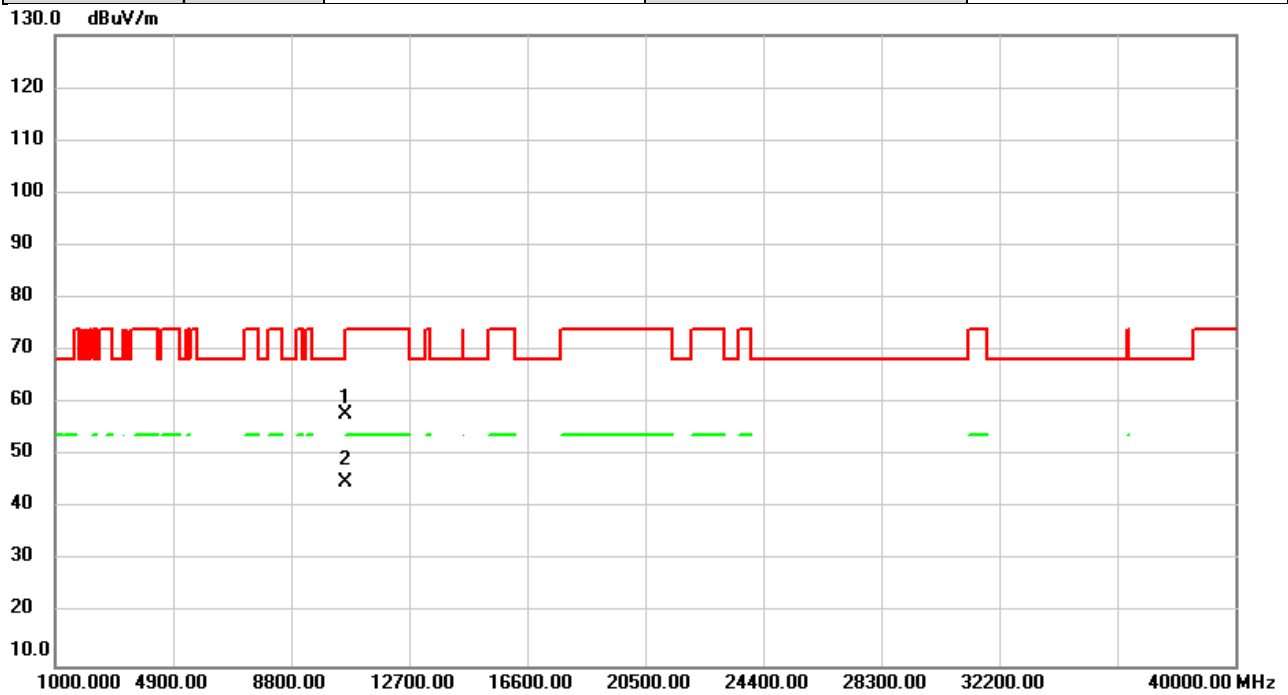


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	52.71	5.10	57.81	68.20	-10.39	peak	
2	*	10600.00	39.91	5.10	45.01	54.00	-8.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5320MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

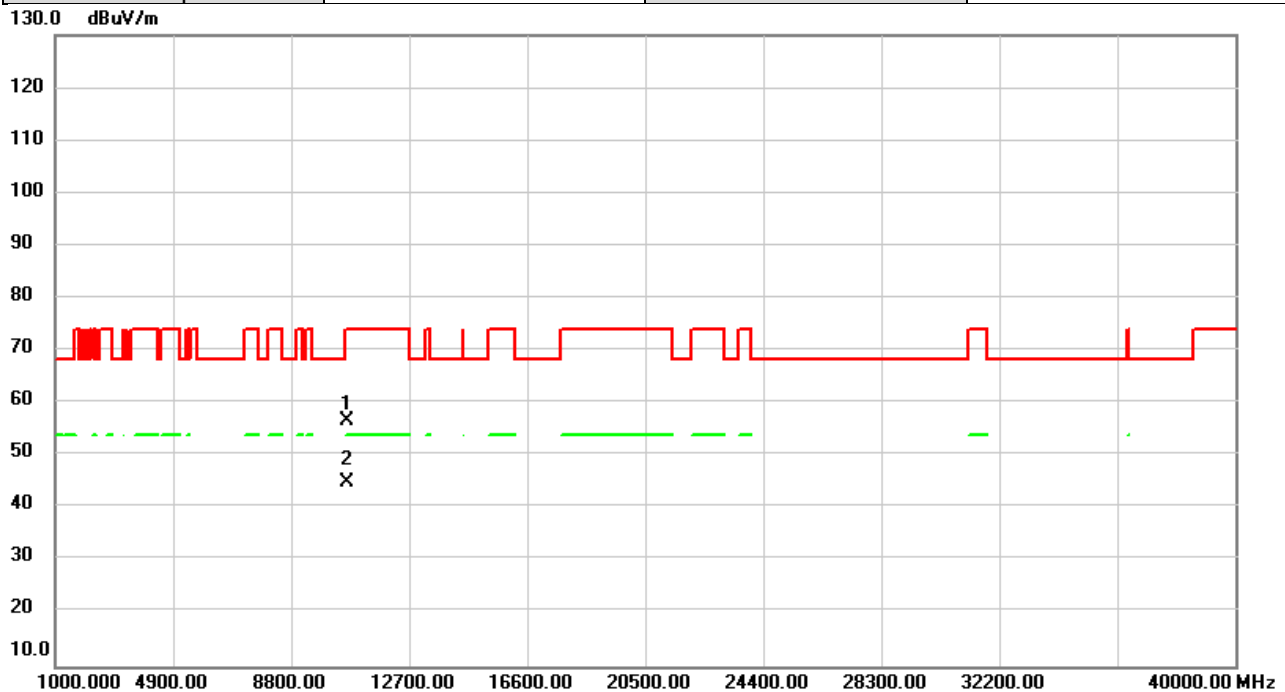


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	51.30	5.22	56.52	74.00	-17.48	peak	
2	*	10640.00	39.73	5.22	44.95	54.00	-9.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5320MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

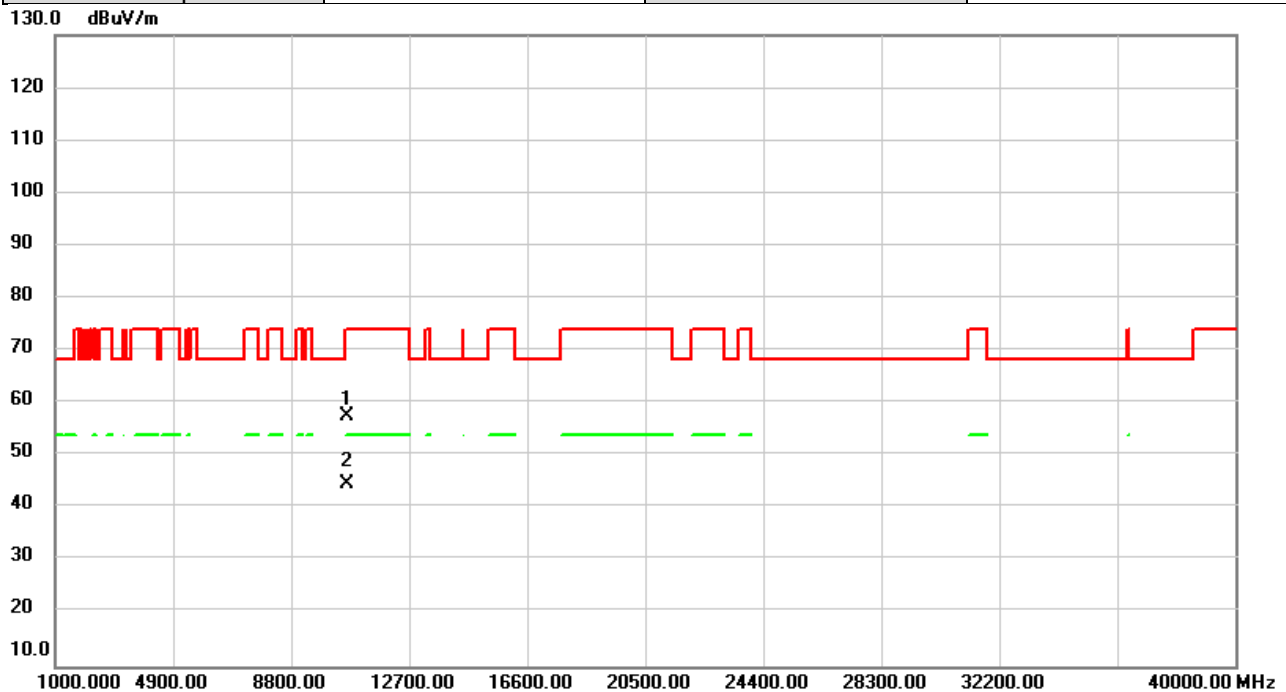


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	52.24	5.22	57.46	74.00	-16.54	peak	
2	*	10640.00	39.58	5.22	44.80	54.00	-9.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5500MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

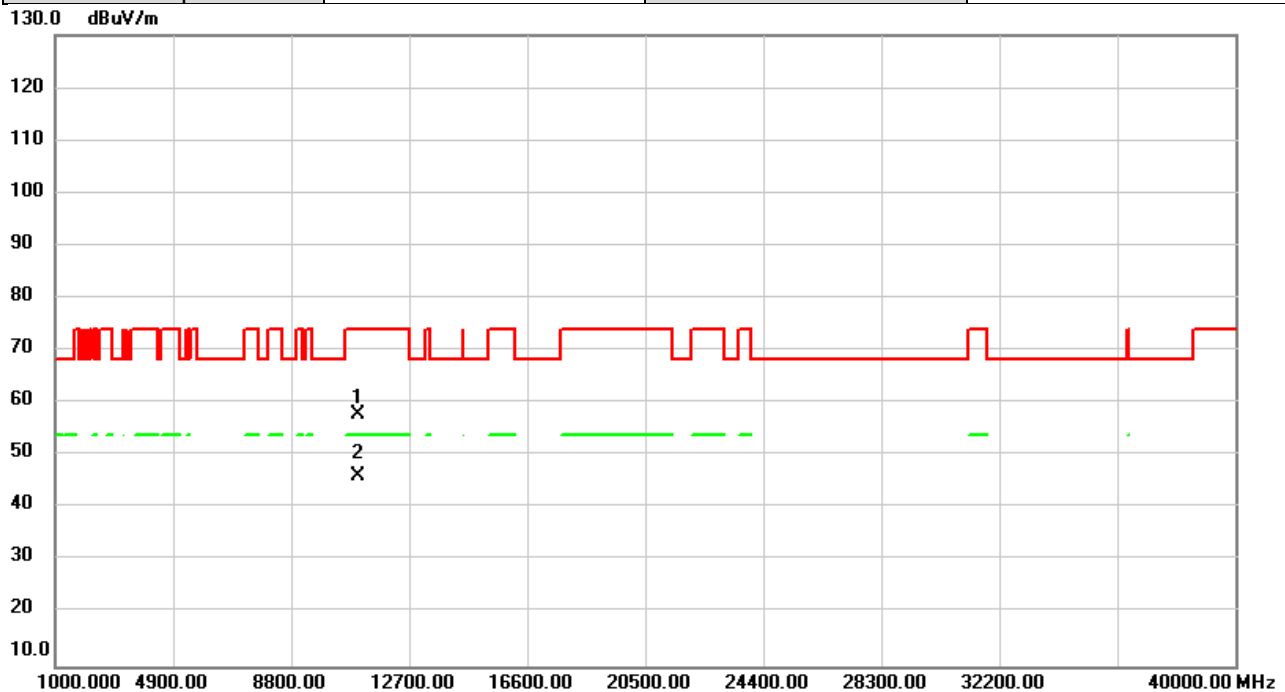


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	51.58	6.27	57.85	74.00	-16.15	peak	
2	*	11000.00	39.94	6.27	46.21	54.00	-7.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5500MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

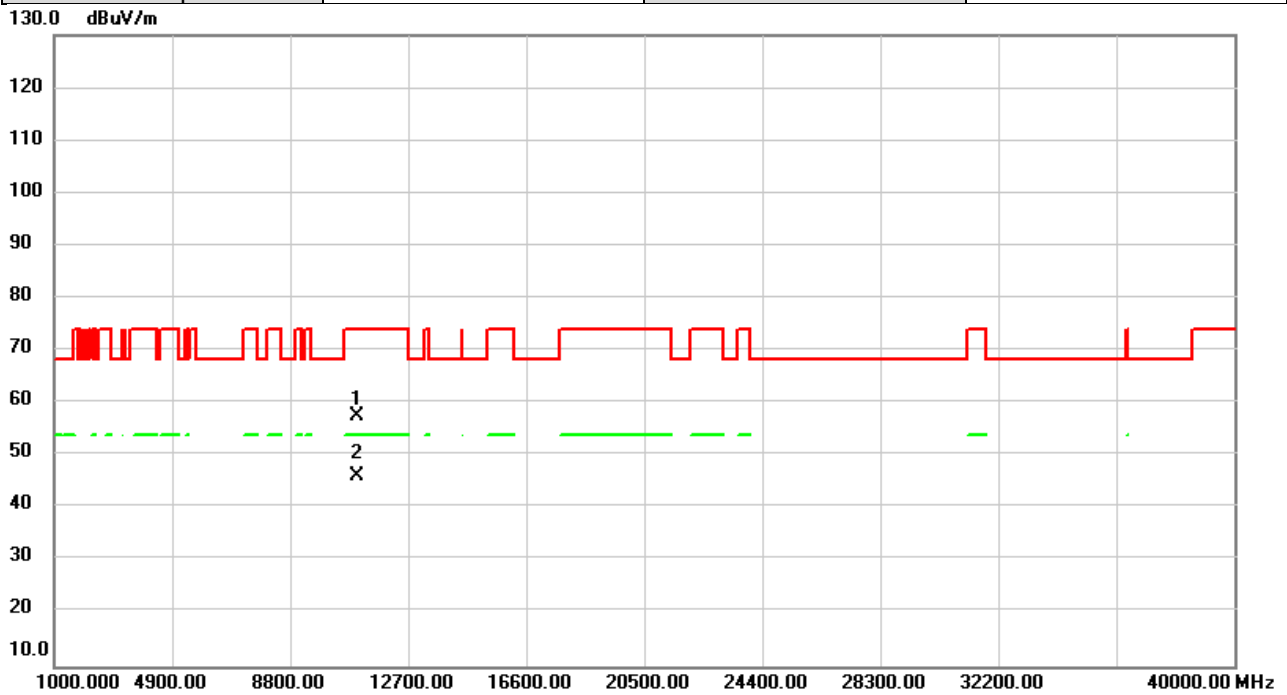


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	51.39	6.27	57.66	74.00	-16.34	peak	
2	*	11000.00	40.00	6.27	46.27	54.00	-7.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5580MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

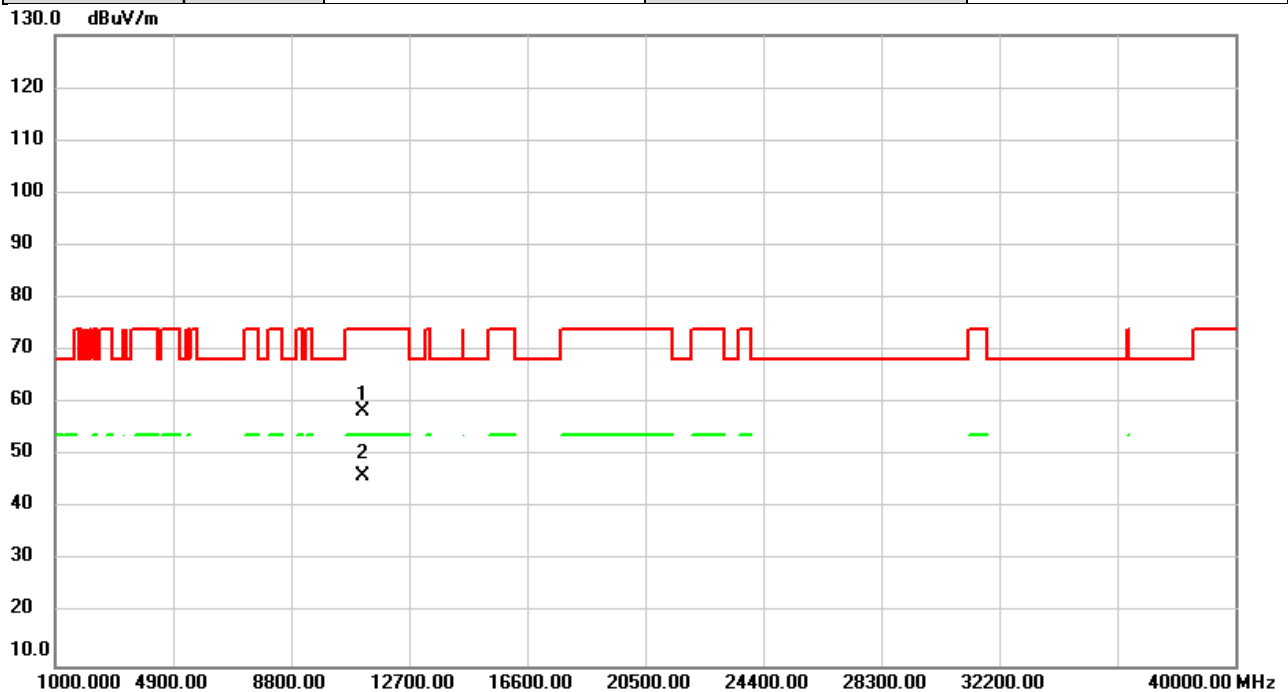


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	52.42	5.93	58.35	74.00	-15.65	peak	
2	*	11160.00	40.16	5.93	46.09	54.00	-7.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5580MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

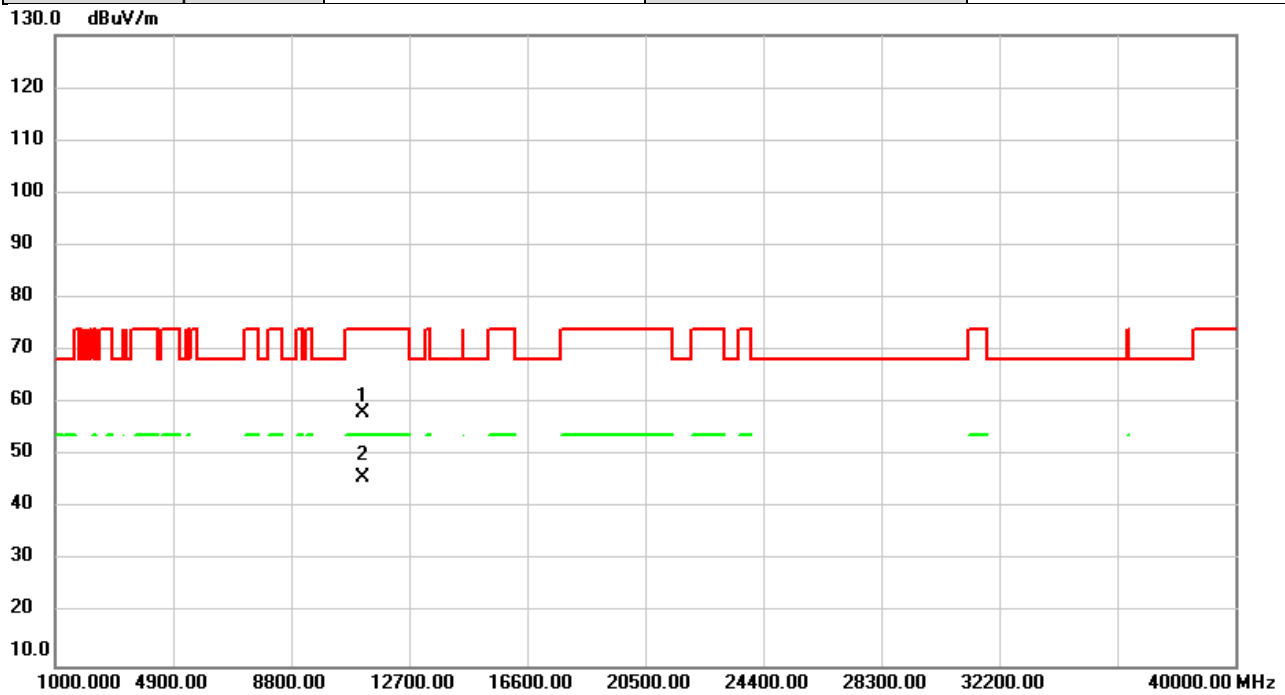


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	52.09	5.93	58.02	74.00	-15.98	peak	
2	*	11160.00	39.94	5.93	45.87	54.00	-8.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5700MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

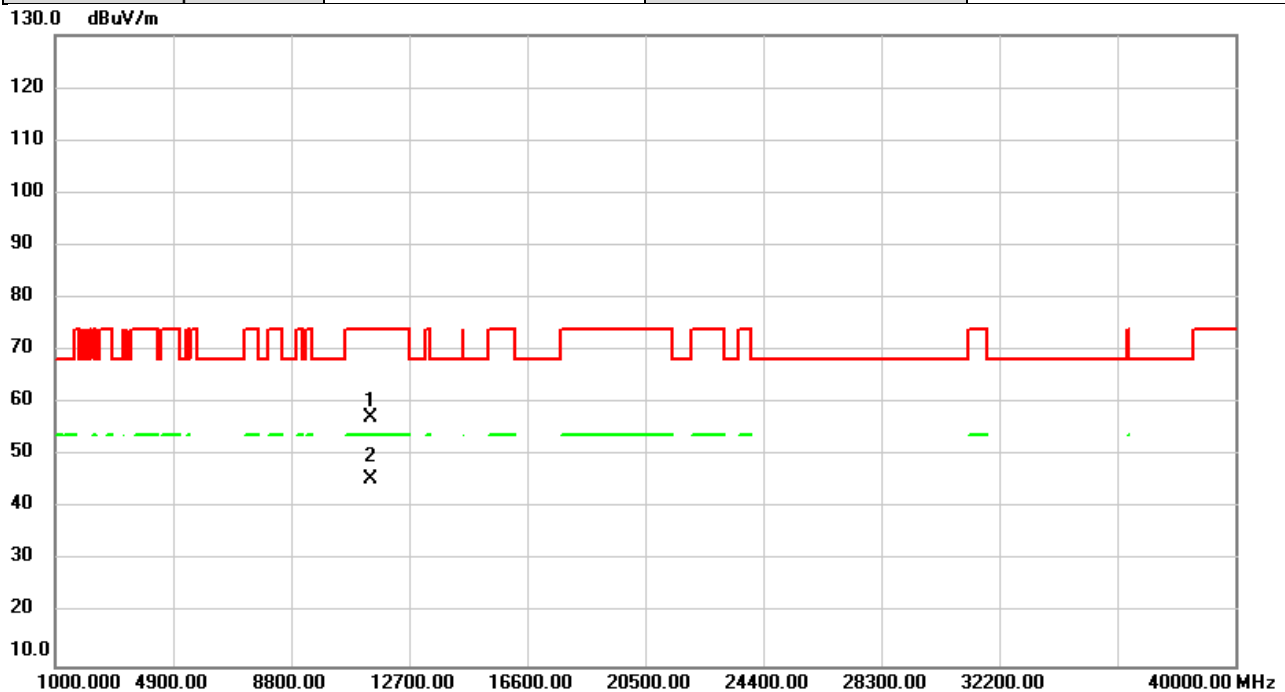


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	51.70	5.44	57.14	74.00	-16.86	peak	
2	*	11400.00	40.14	5.44	45.58	54.00	-8.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5700MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

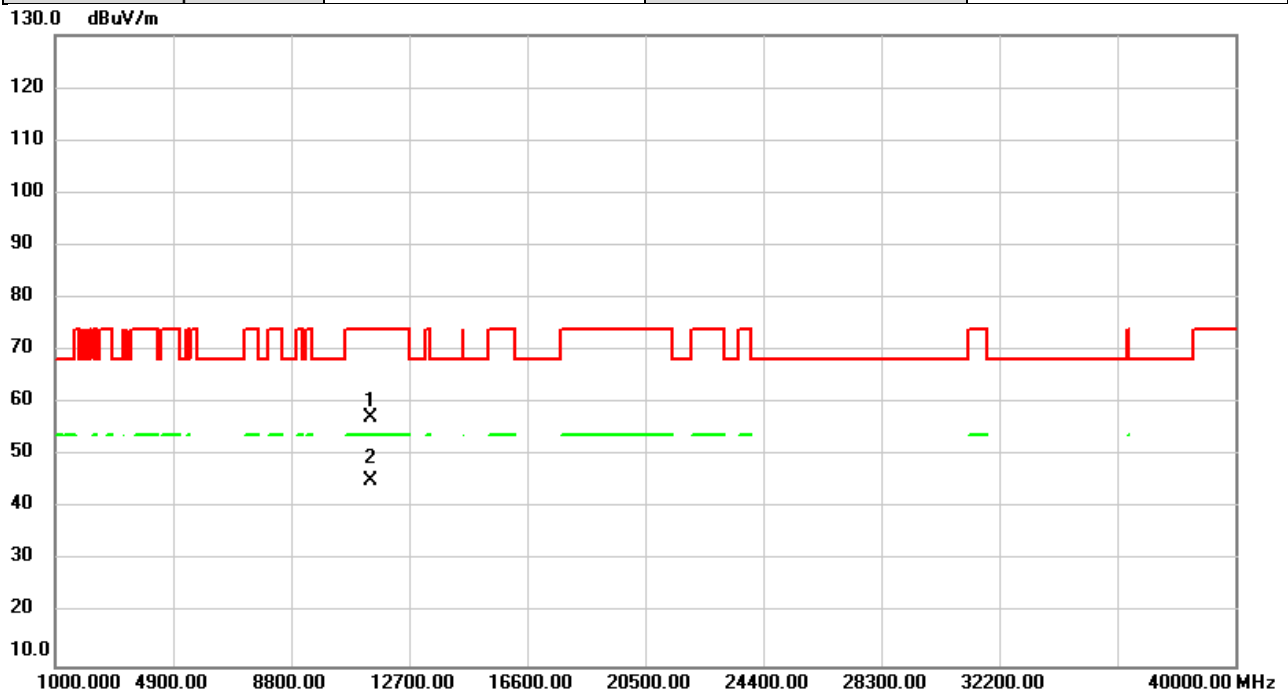


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	51.93	5.44	57.37	74.00	-16.63	peak	
2	*	11400.00	39.83	5.44	45.27	54.00	-8.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5720MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

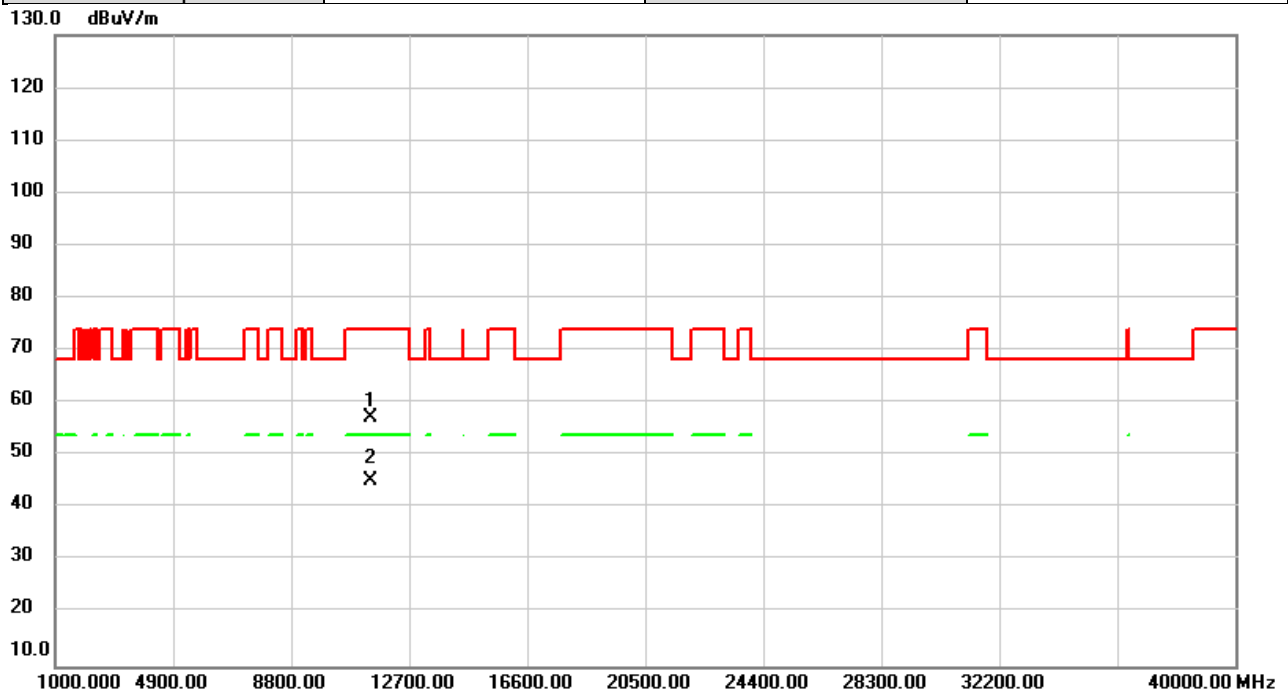


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	51.92	5.36	57.28	74.00	-16.72	peak	
2	*	11440.00	40.02	5.36	45.38	54.00	-8.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5720MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

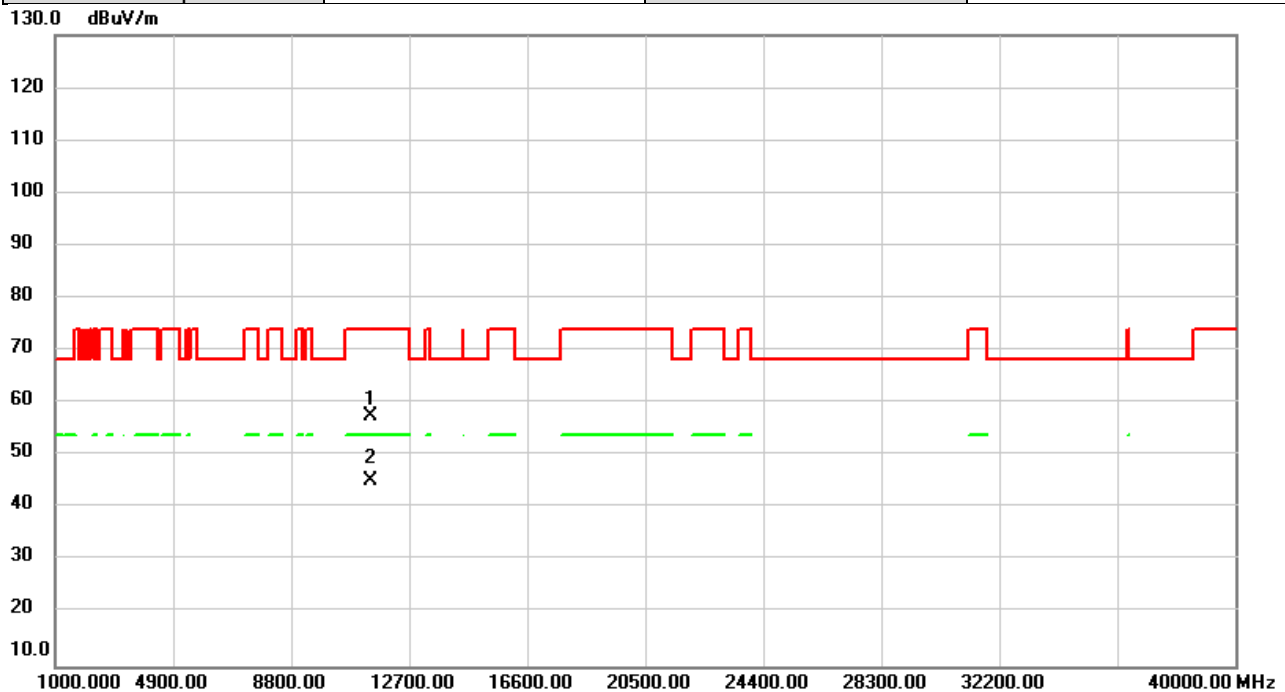


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	52.05	5.36	57.41	74.00	-16.59	peak	
2	*	11440.00	40.02	5.36	45.38	54.00	-8.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5745MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

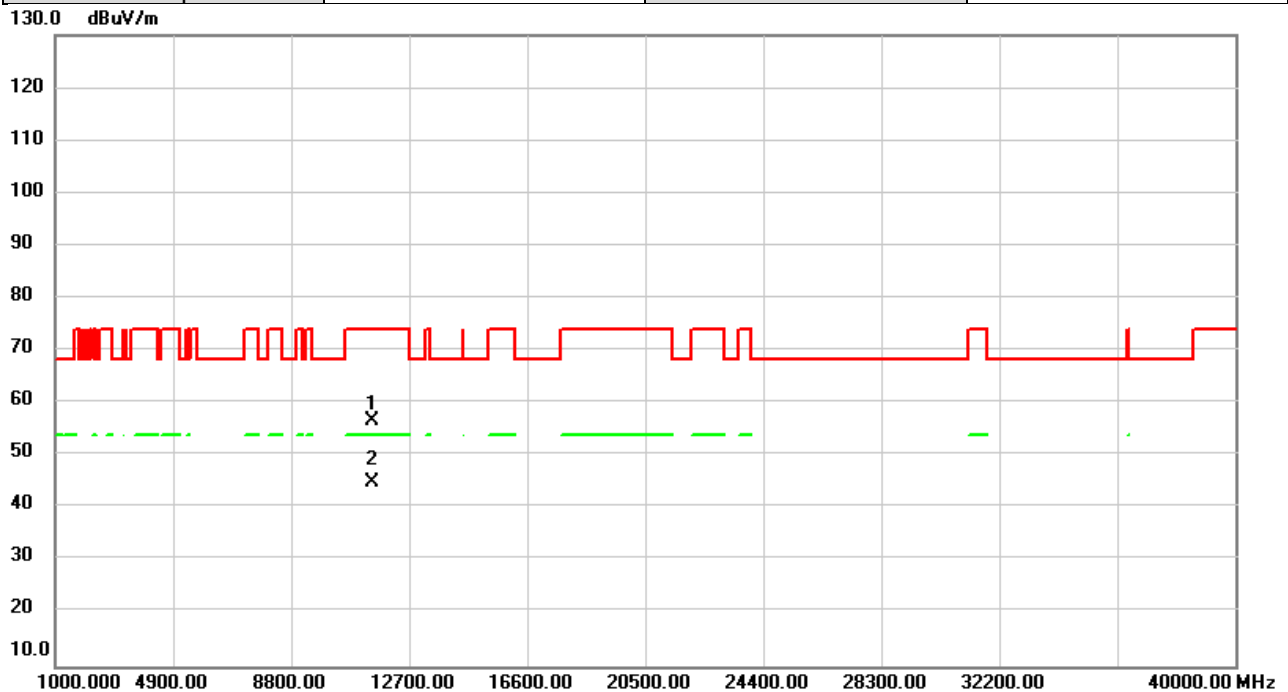


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	51.52	5.26	56.78	74.00	-17.22	peak	
2	*	11490.00	39.72	5.26	44.98	54.00	-9.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

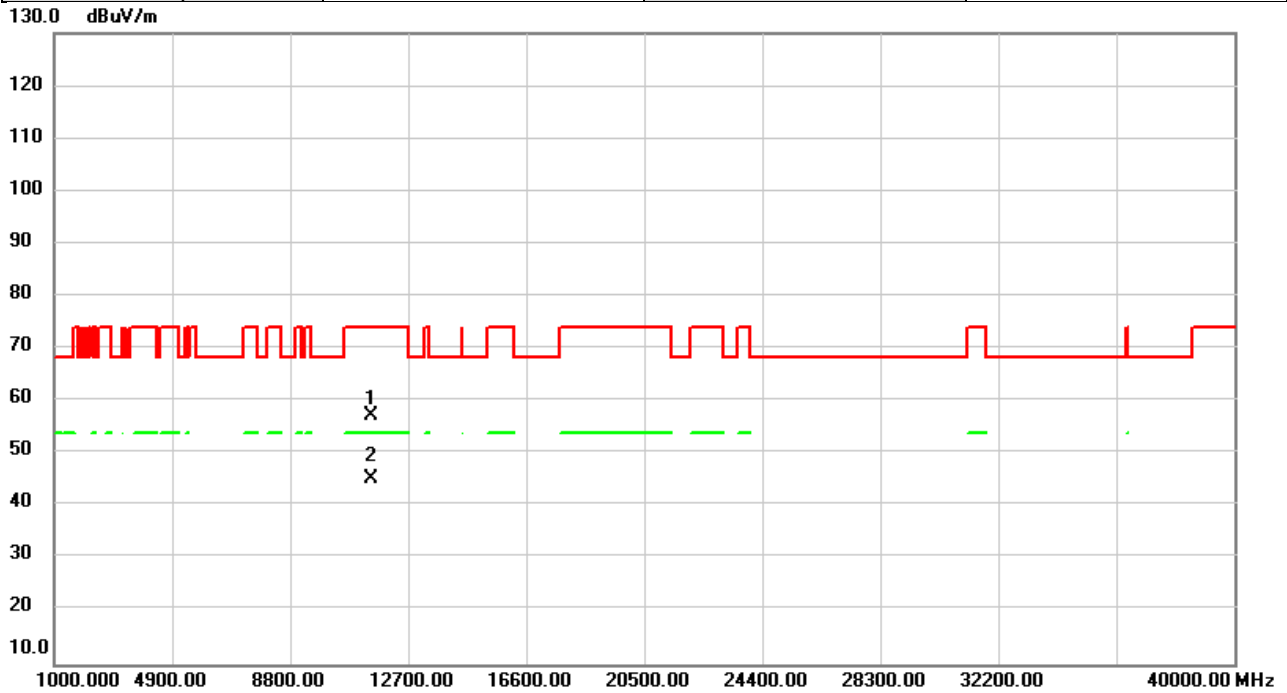


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	51.89	5.26	57.15	74.00	-16.85	peak	
2	*	11490.00	39.92	5.26	45.18	54.00	-8.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5785MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

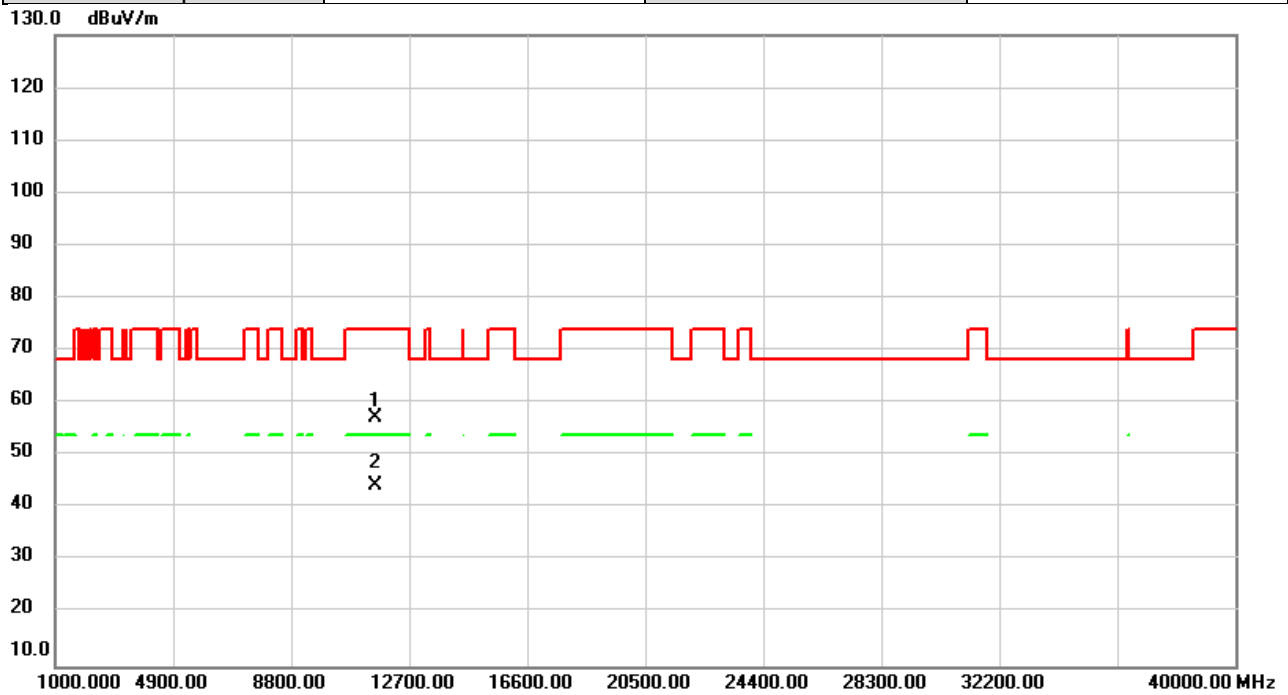


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	52.05	5.06	57.11	74.00	-16.89	peak	
2	*	11570.00	39.38	5.06	44.44	54.00	-9.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5785MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

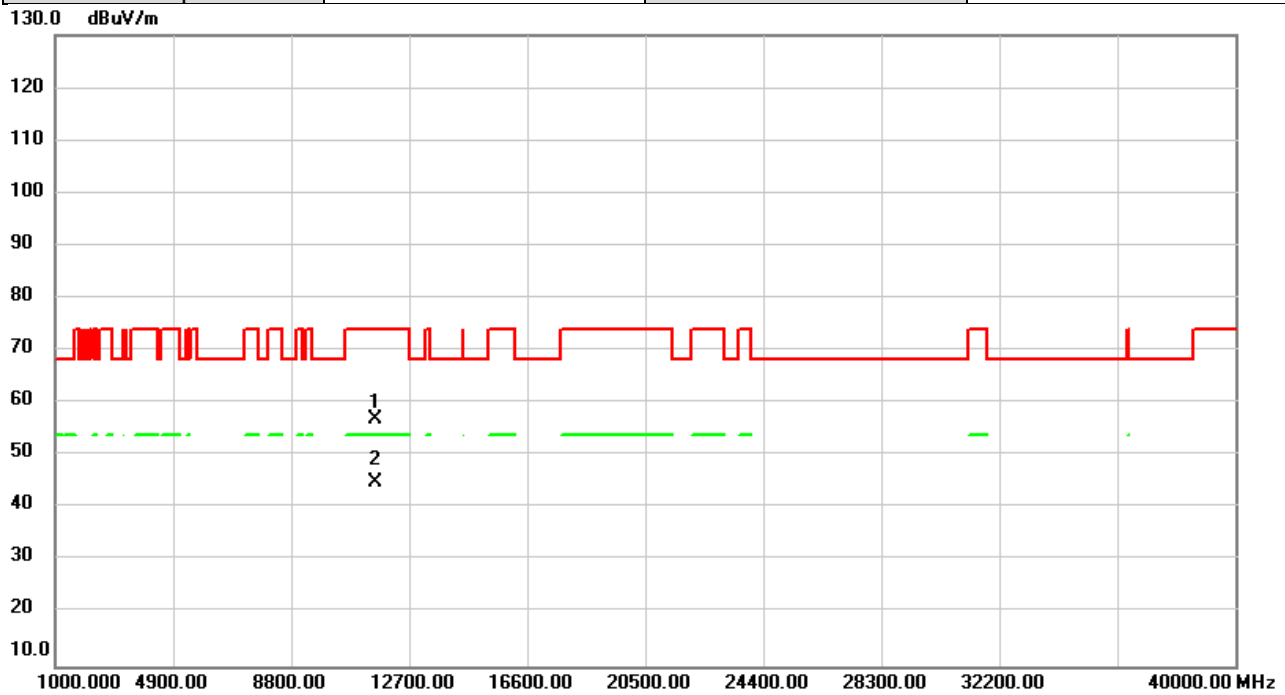


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	52.03	5.06	57.09	74.00	-16.91	peak	
2	*	11570.00	39.77	5.06	44.83	54.00	-9.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5825MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

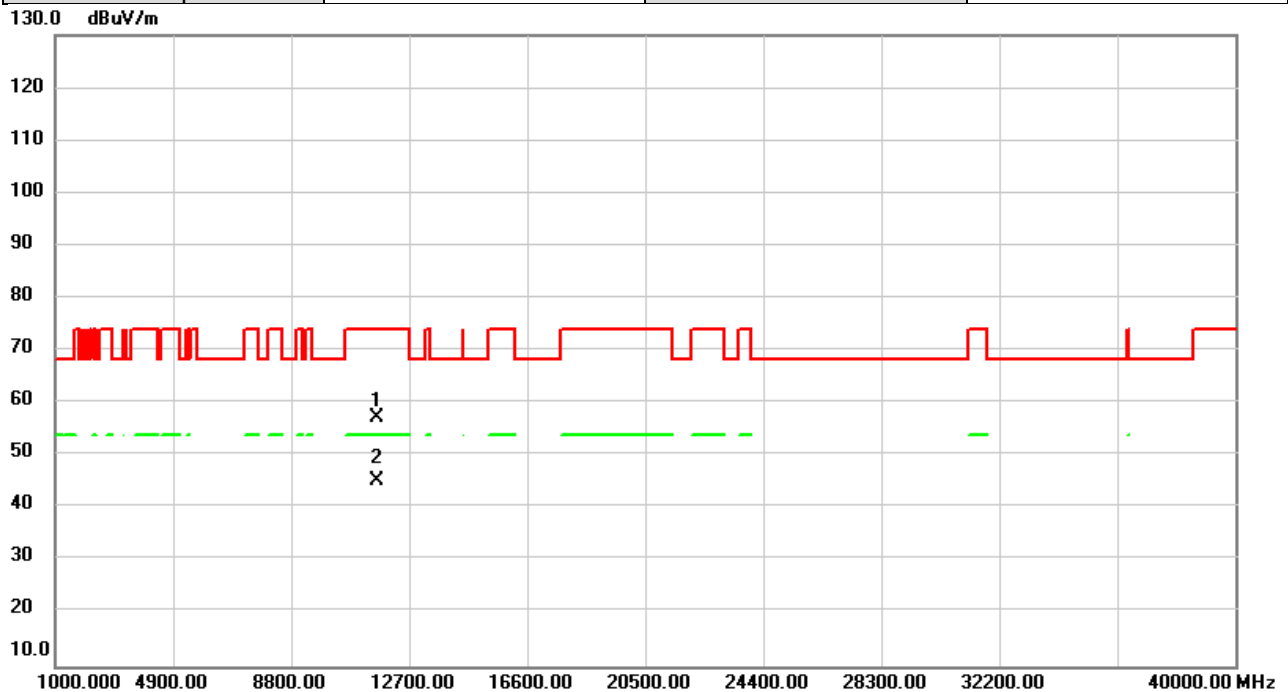


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	52.28	4.85	57.13	74.00	-16.87	peak	
2	*	11650.00	40.34	4.85	45.19	54.00	-8.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT20)	Test Date	2021/11/4
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

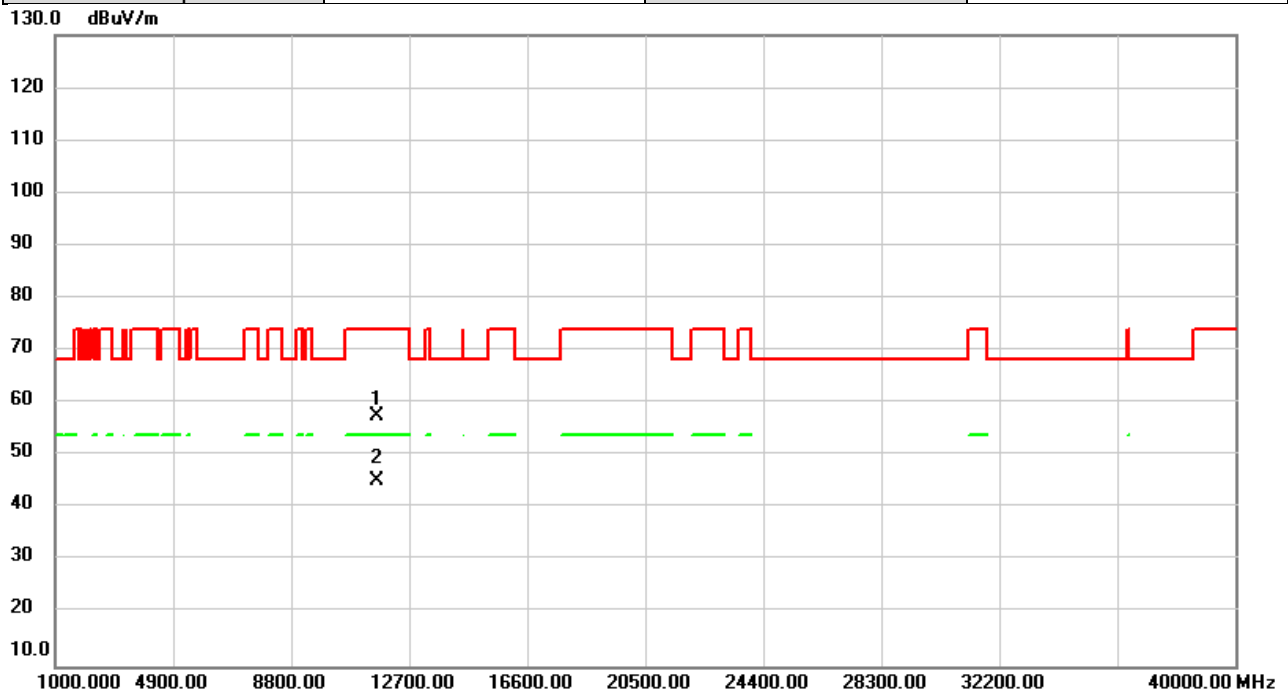


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	52.67	4.85	57.52	74.00	-16.48	peak	
2	*	11650.00	40.25	4.85	45.10	54.00	-8.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5190MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

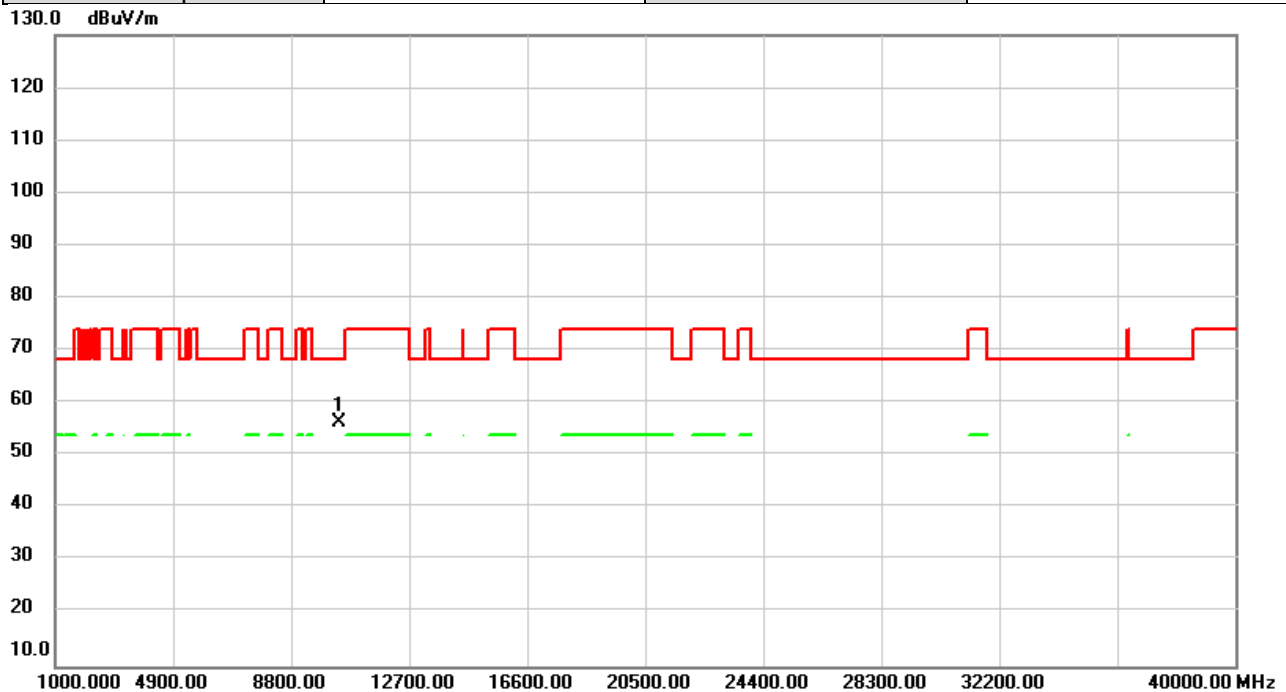


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10380.00	51.89	4.49	56.38	68.20	-11.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5190MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

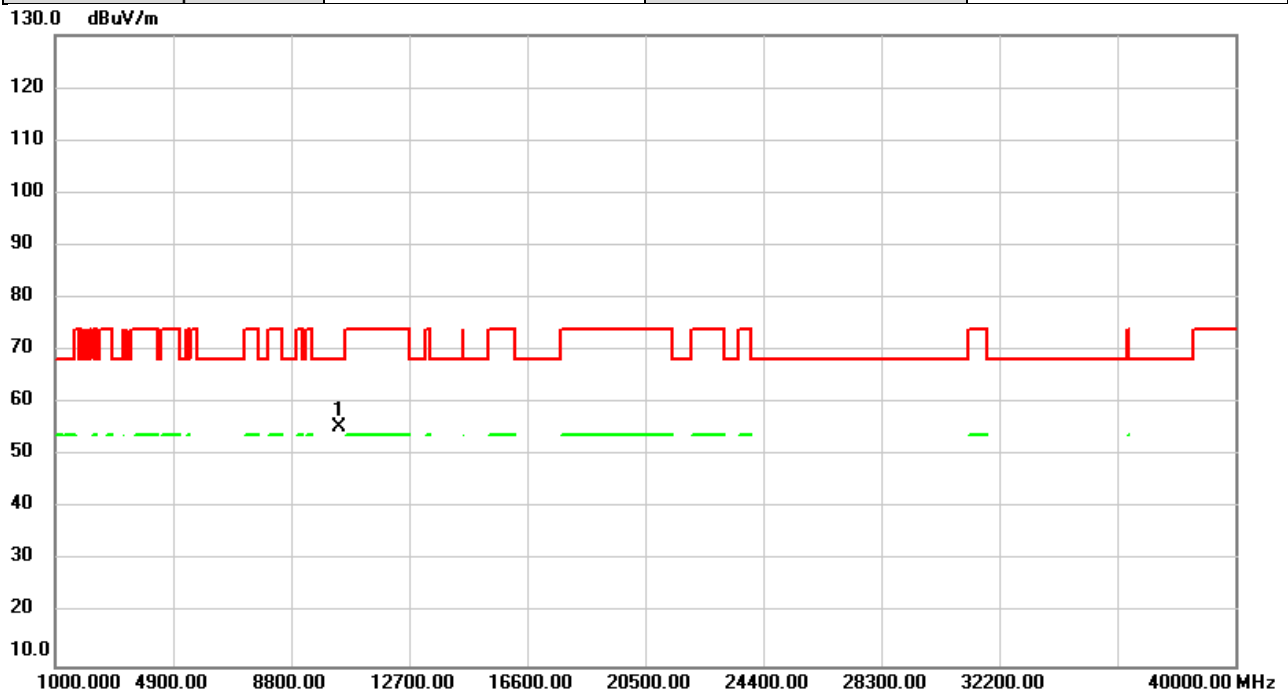


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10380.00	51.06	4.49	55.55	68.20	-12.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5230MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

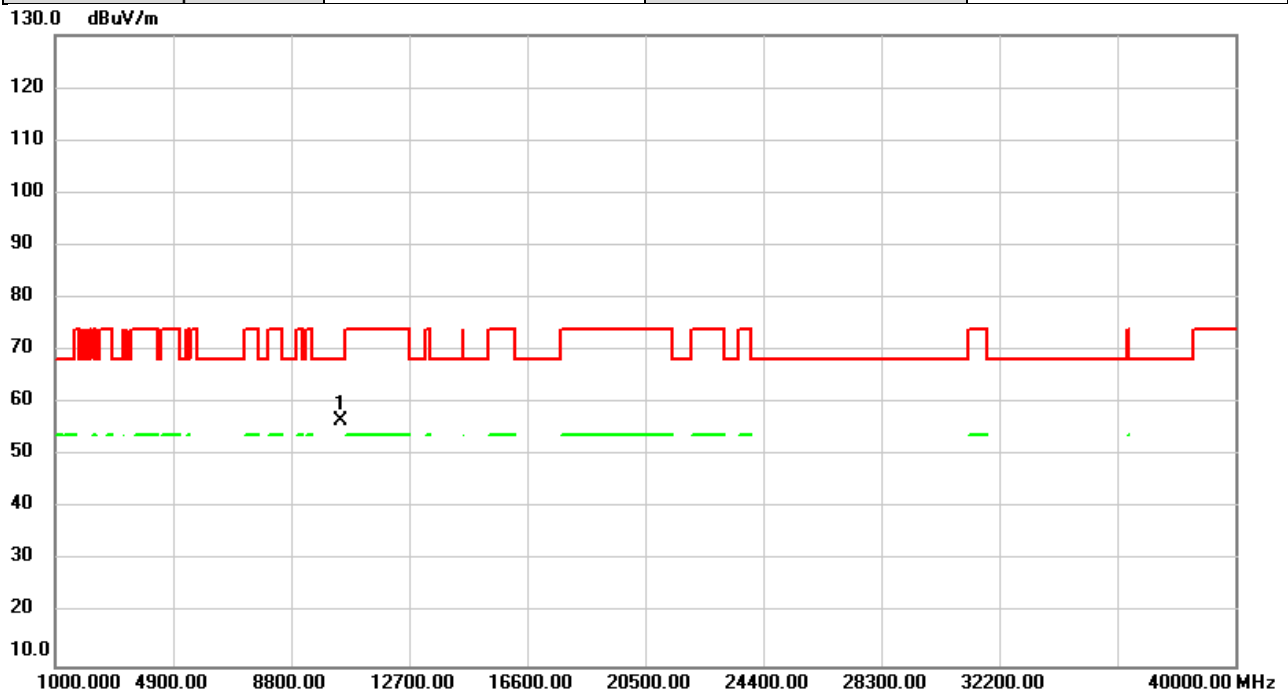


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	51.84	4.70	56.54	68.20	-11.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5230MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

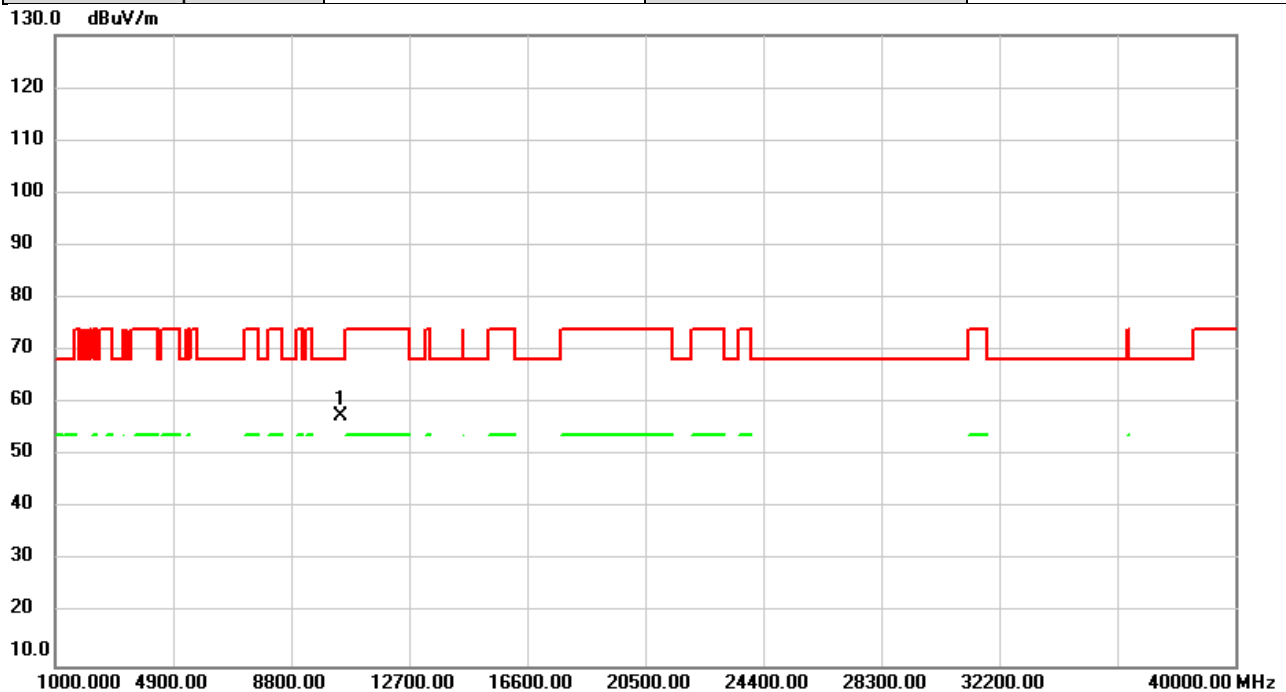


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	52.75	4.70	57.45	68.20	-10.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5270MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

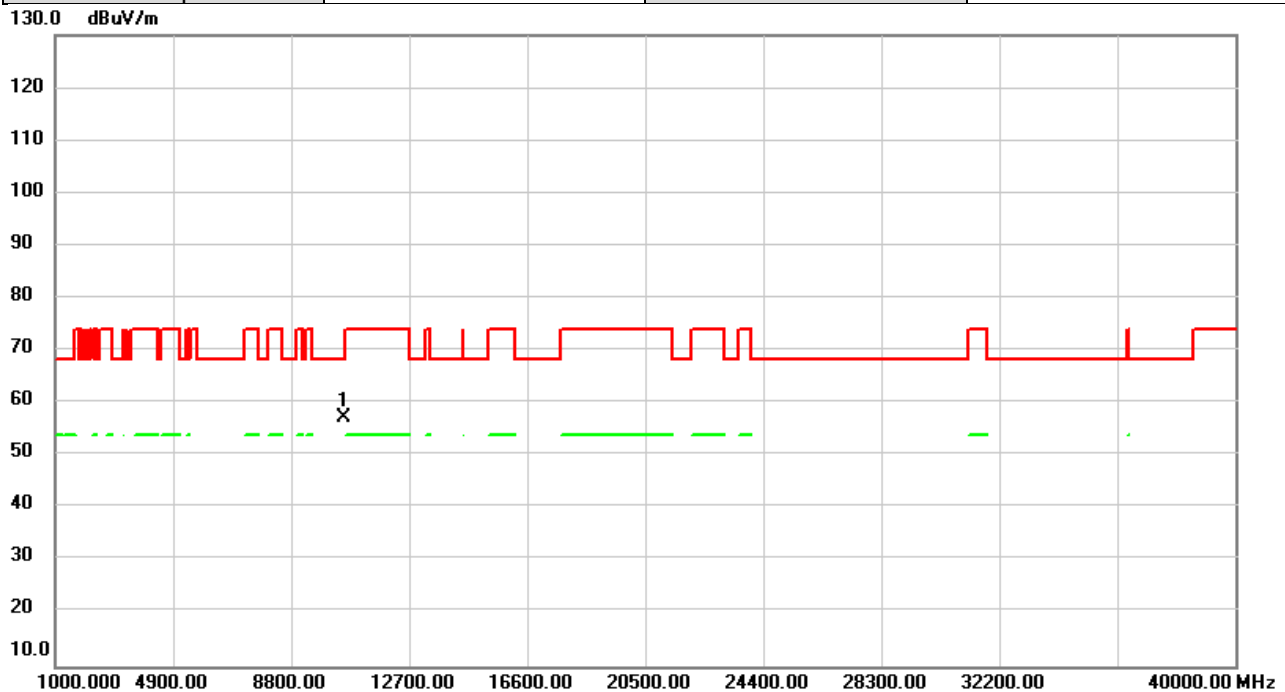


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	52.43	4.92	57.35	68.20	-10.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5270MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

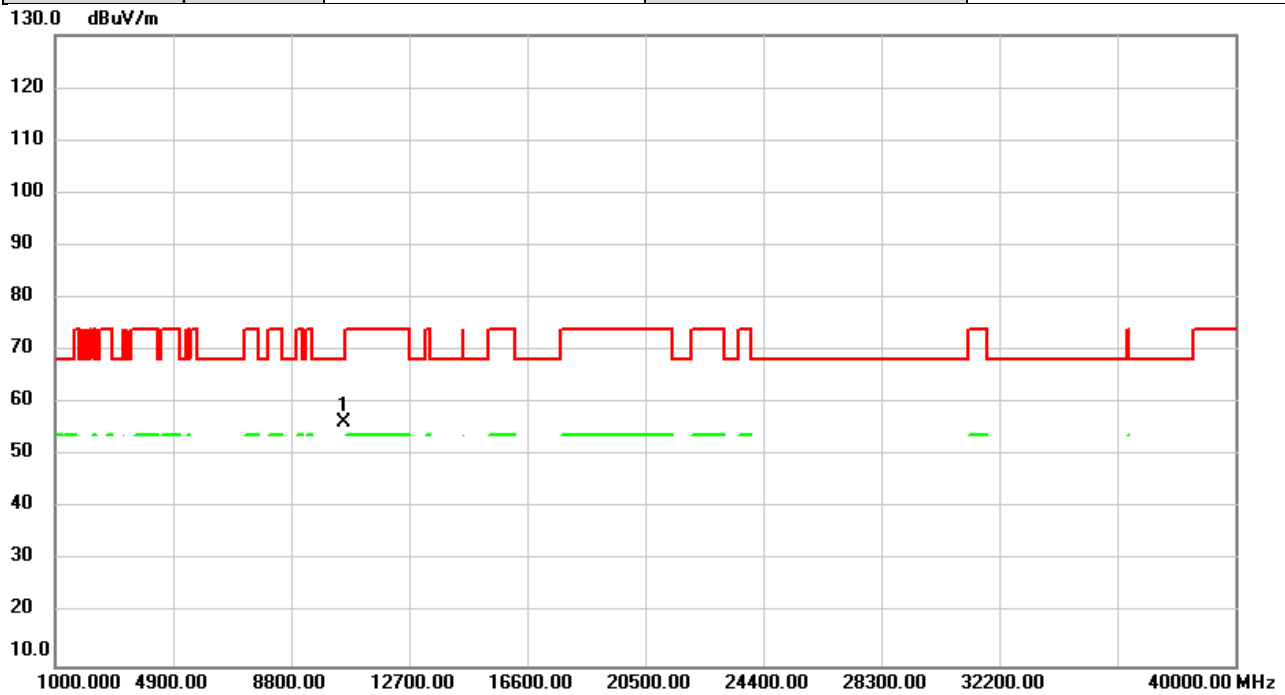


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10540.00	51.37	4.92	56.29	68.20	-11.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5310MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

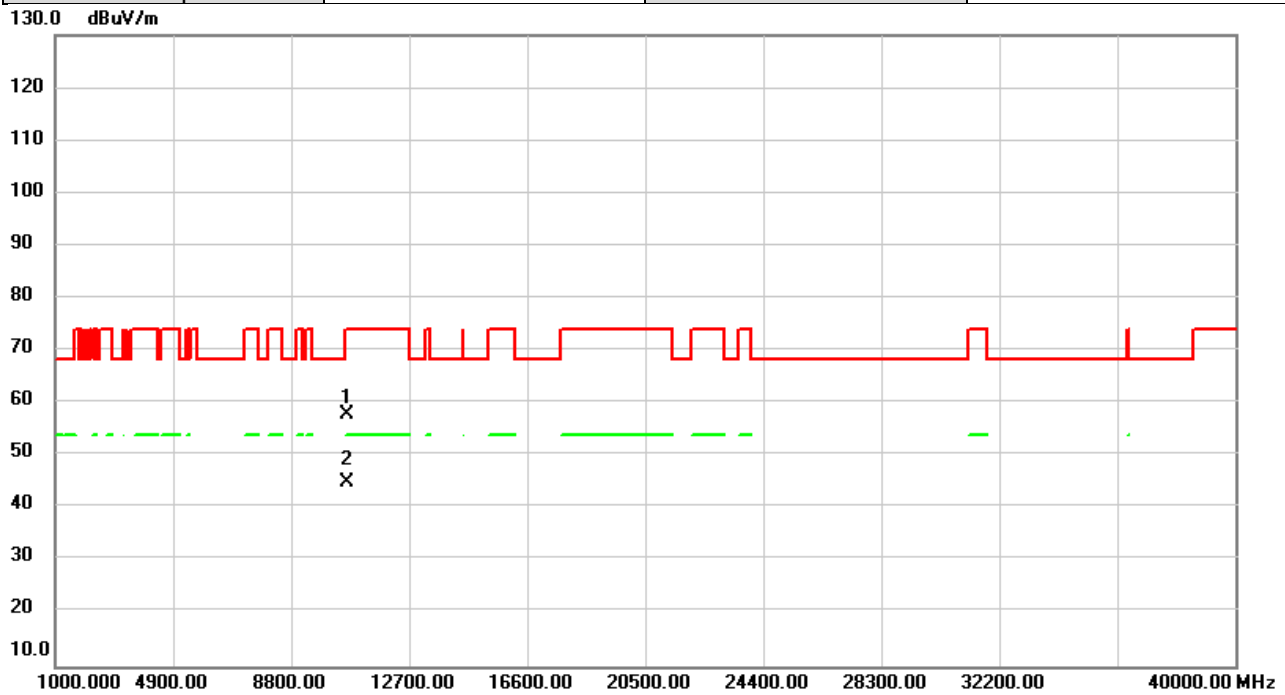


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	52.83	5.15	57.98	74.00	-16.02	peak	
2	*	10620.00	39.66	5.15	44.81	54.00	-9.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5310MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

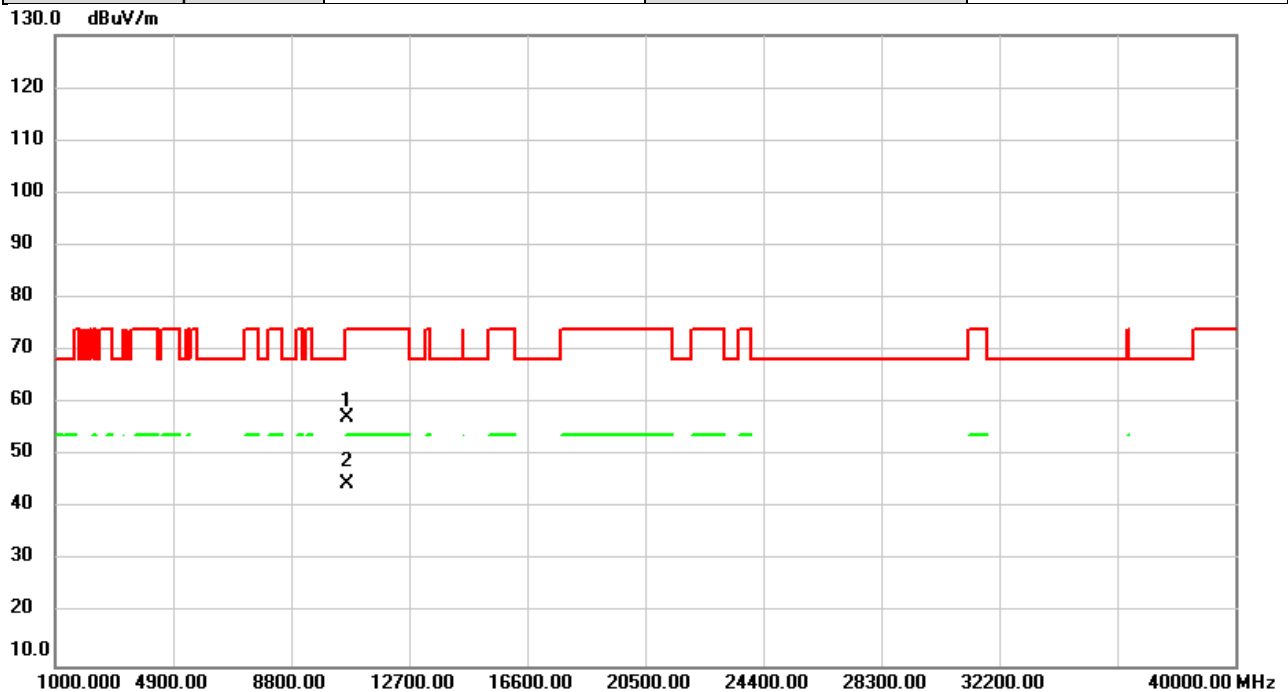


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	52.01	5.15	57.16	74.00	-16.84	peak	
2	*	10620.00	39.57	5.15	44.72	54.00	-9.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5510MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

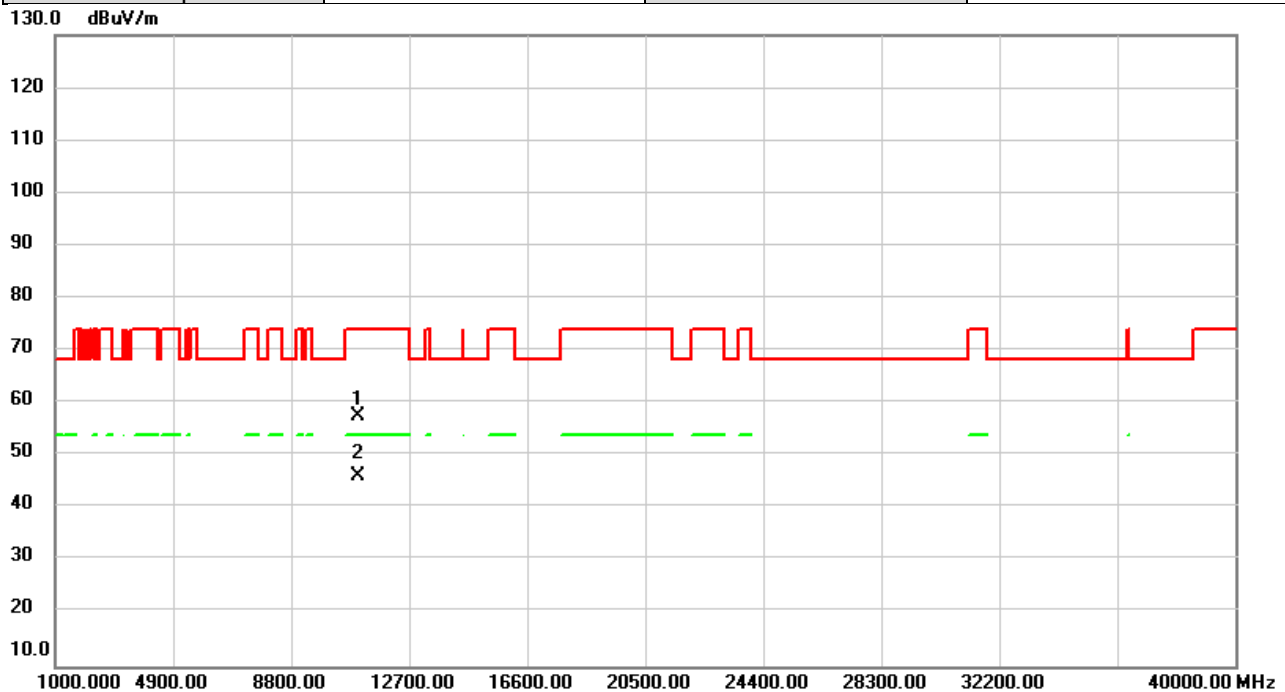


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	51.42	6.23	57.65	74.00	-16.35	peak	
2	*	11020.00	39.93	6.23	46.16	54.00	-7.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5510MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

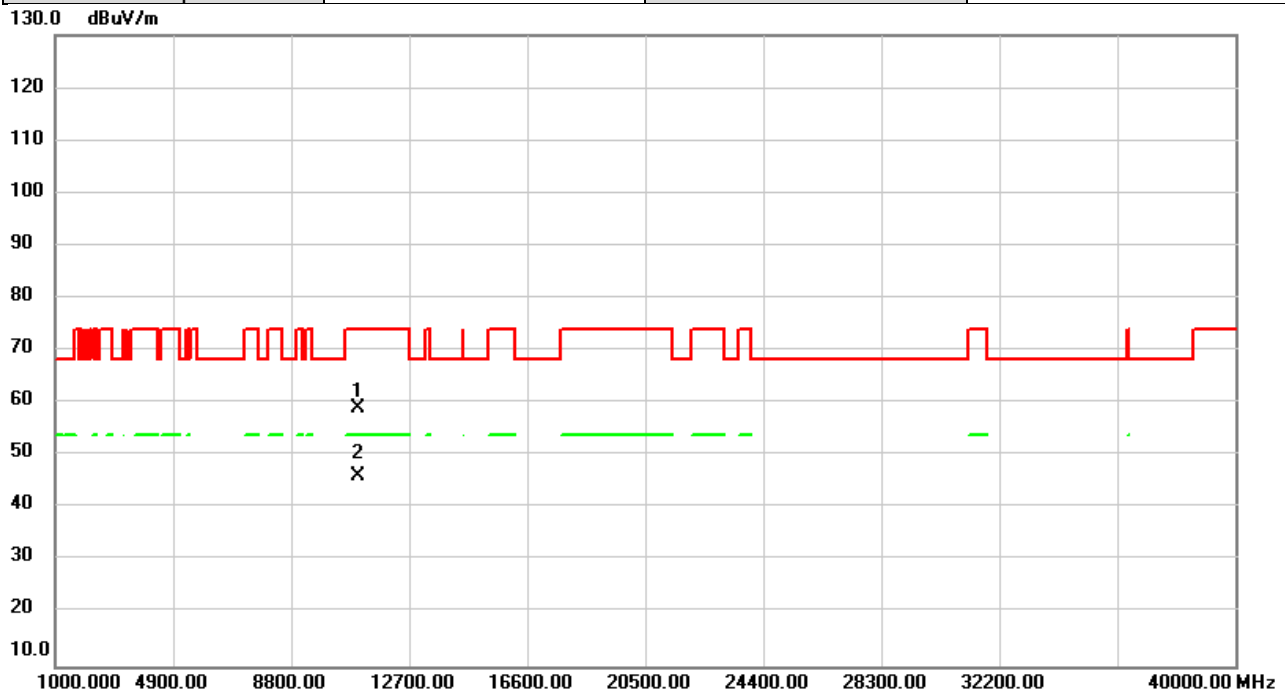


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	52.70	6.23	58.93	74.00	-15.07	peak	
2	*	11020.00	40.00	6.23	46.23	54.00	-7.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5550MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

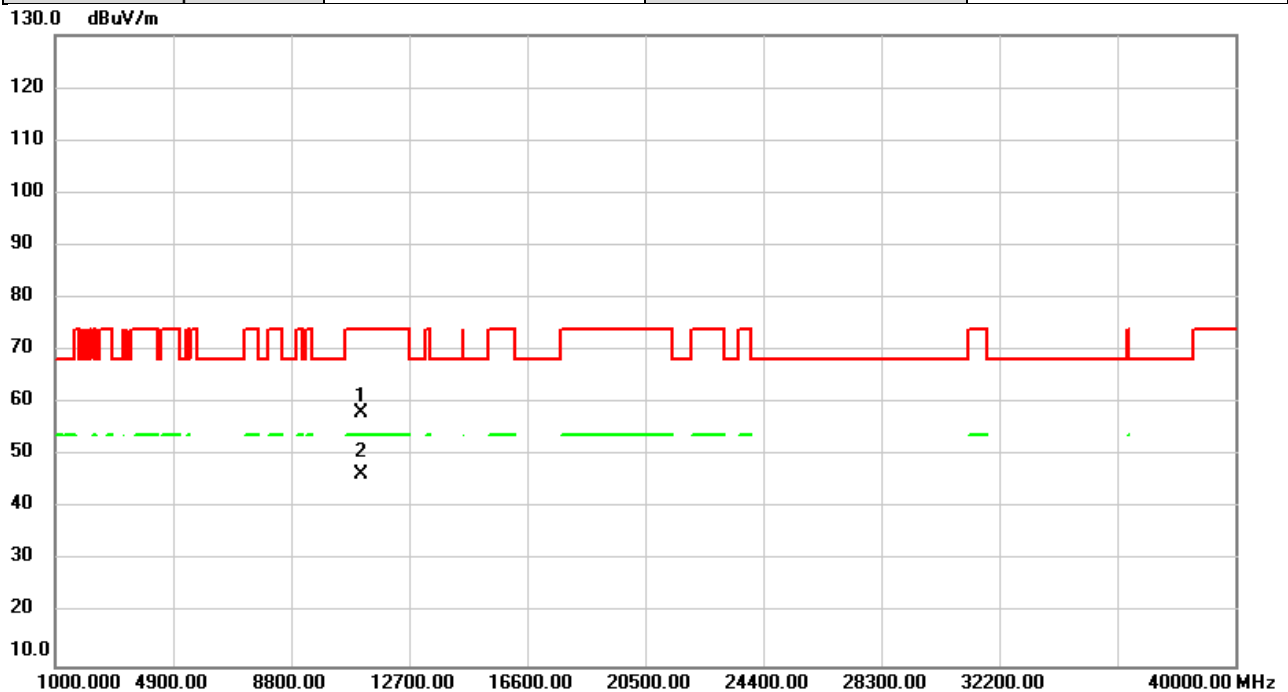


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	52.19	6.07	58.26	74.00	-15.74	peak	
2	*	11100.00	40.24	6.07	46.31	54.00	-7.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5550MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

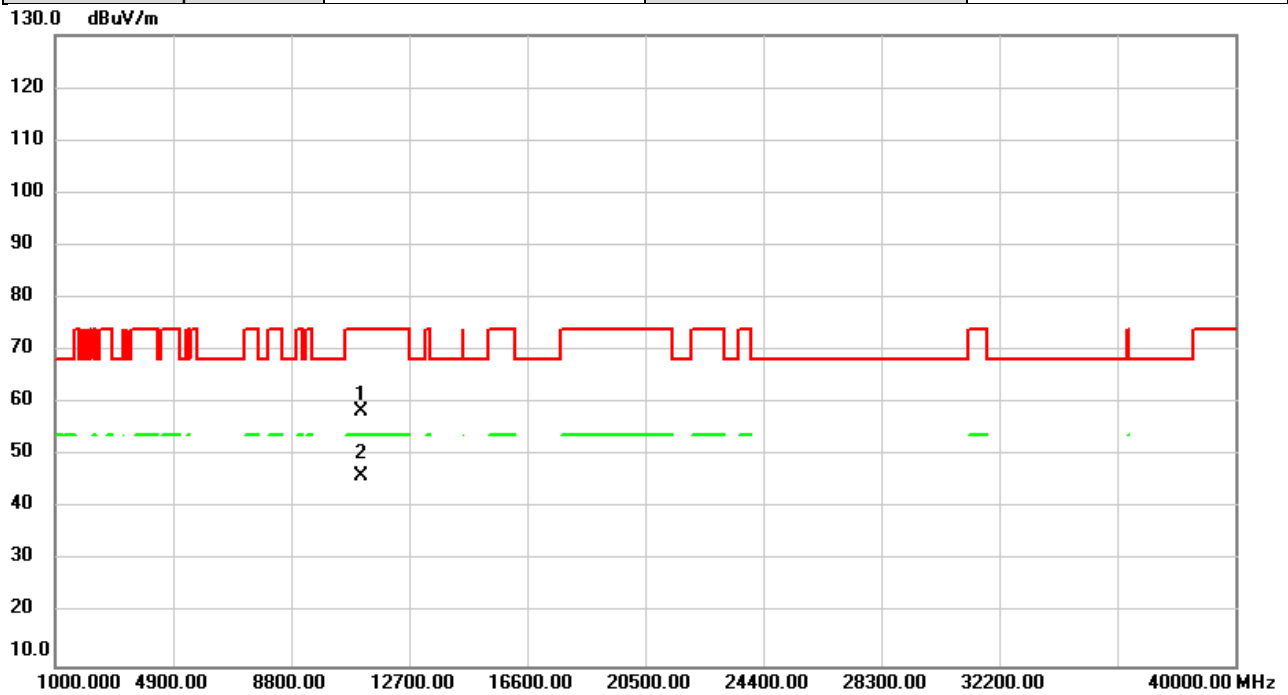


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	52.24	6.07	58.31	74.00	-15.69	peak	
2	*	11100.00	40.21	6.07	46.28	54.00	-7.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5670MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

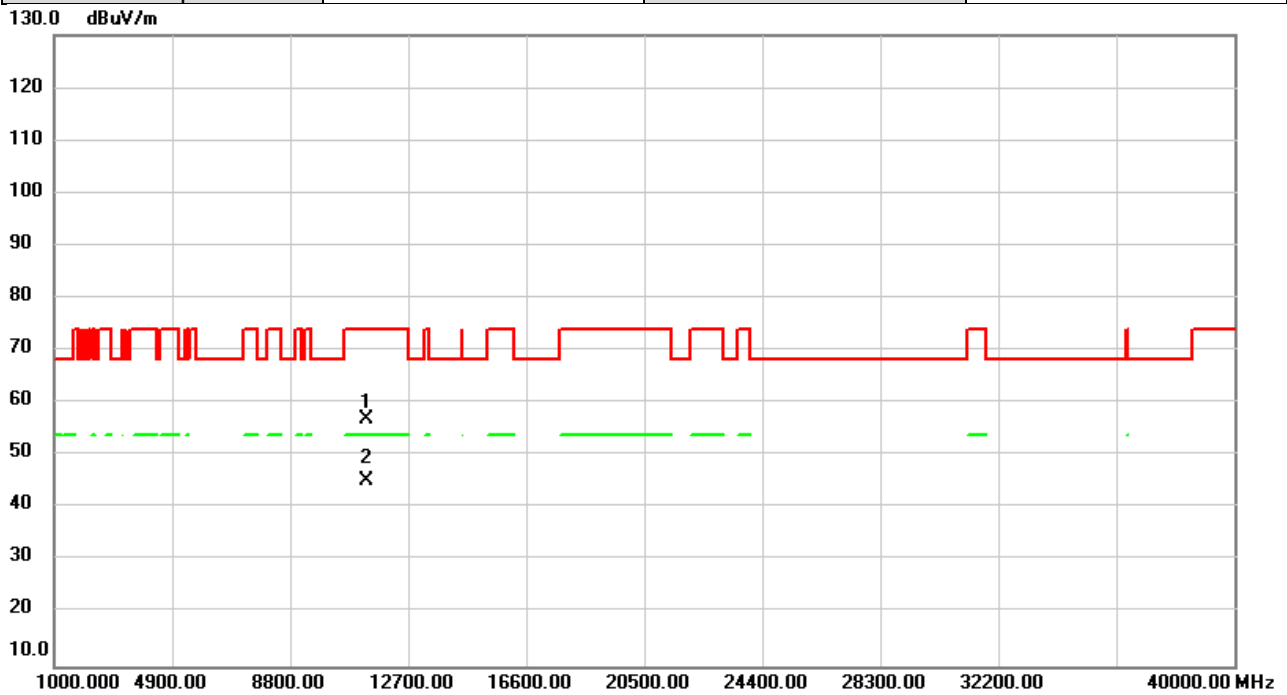


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	51.50	5.58	57.08	74.00	-16.92	peak	
2	*	11340.00	39.81	5.58	45.39	54.00	-8.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5670MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

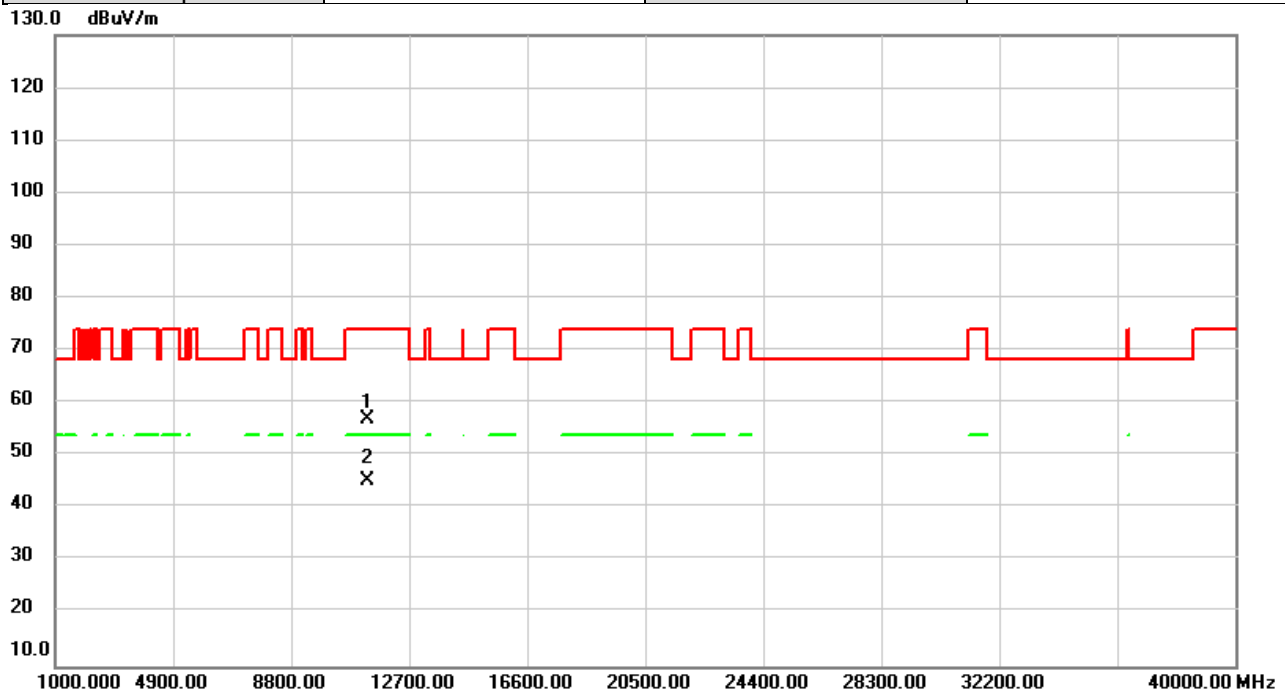


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	51.25	5.58	56.83	74.00	-17.17	peak	
2	*	11340.00	39.66	5.58	45.24	54.00	-8.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5710MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

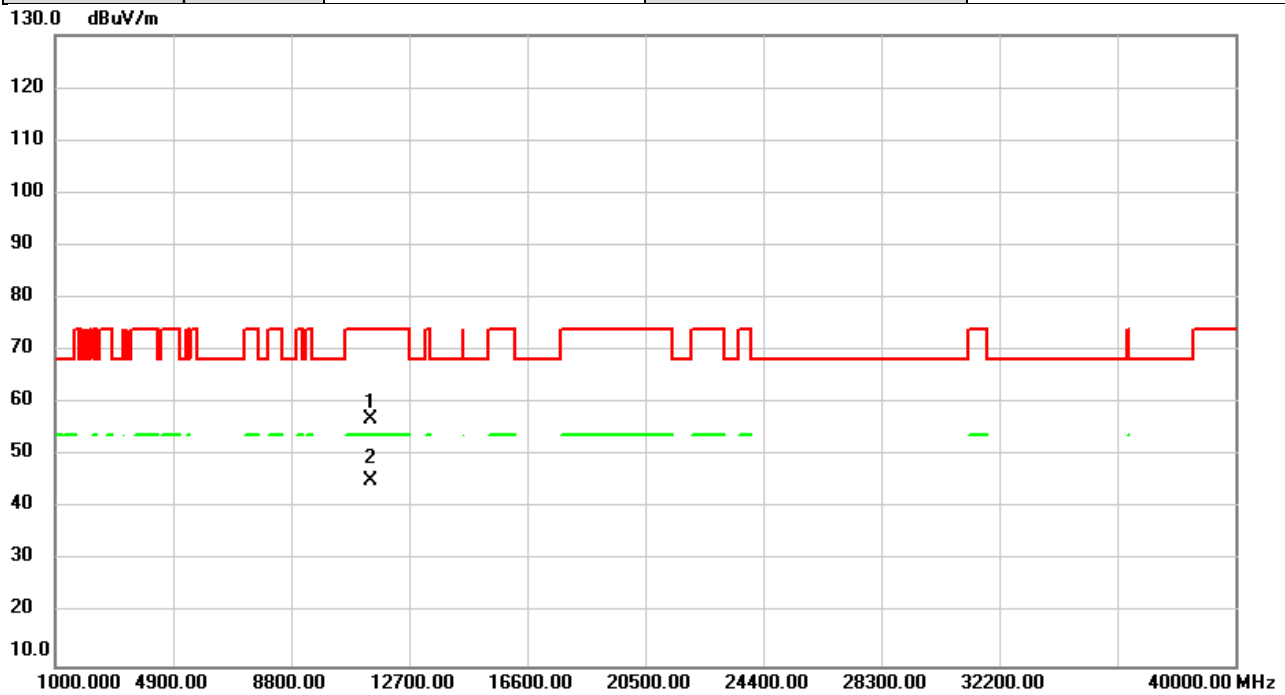


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	51.55	5.40	56.95	74.00	-17.05	peak	
2	*	11420.00	39.80	5.40	45.20	54.00	-8.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5710MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

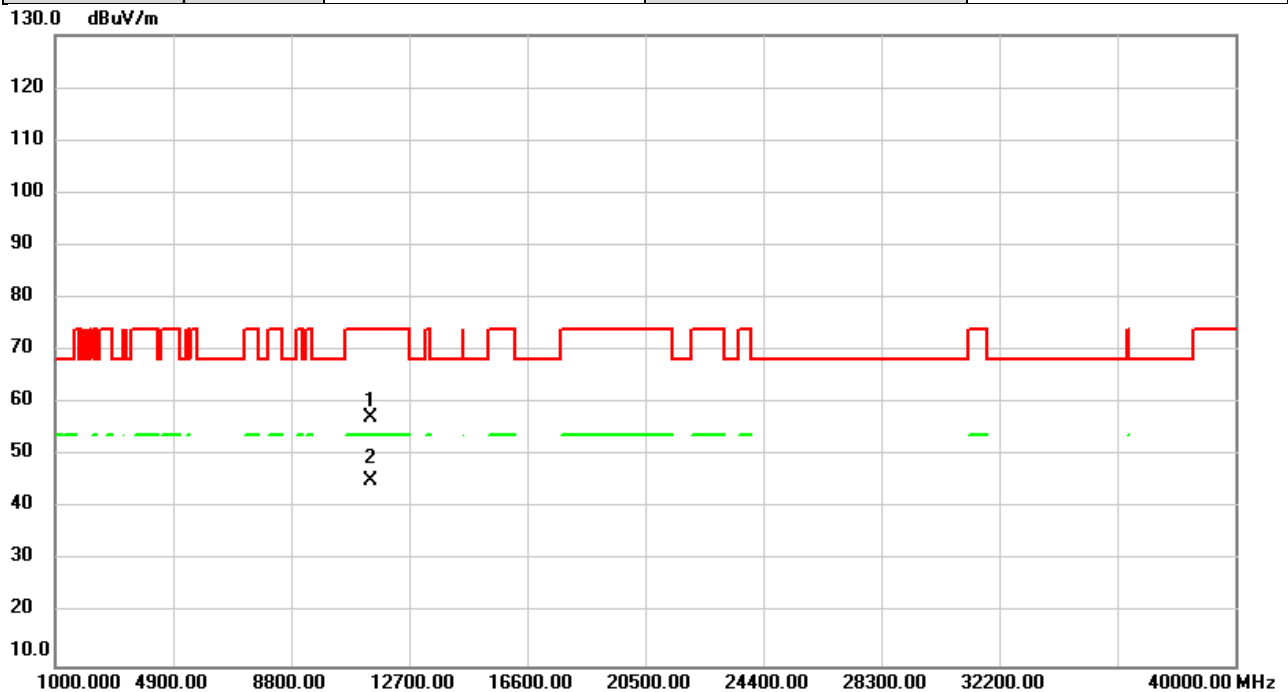


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11420.00	51.76	5.40	57.16	74.00	-16.84	peak	
2	*	11420.00	39.84	5.40	45.24	54.00	-8.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5755MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

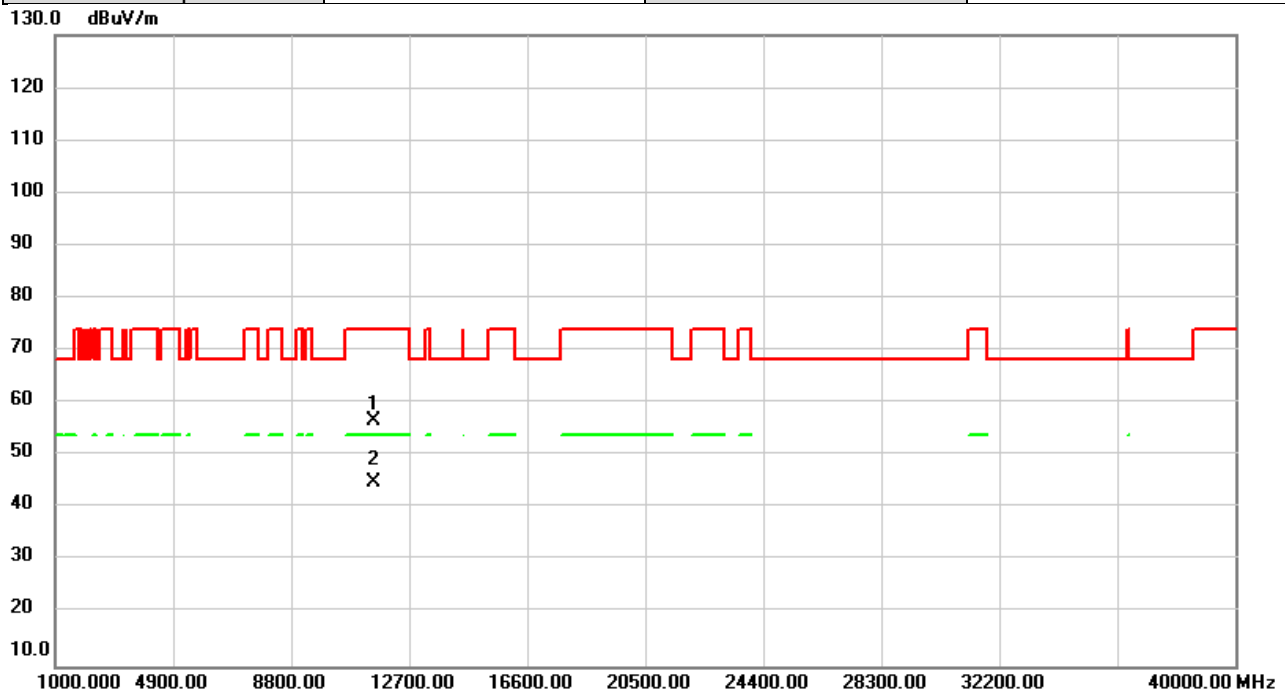


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	51.39	5.22	56.61	74.00	-17.39	peak	
2	*	11510.00	39.79	5.22	45.01	54.00	-8.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5755MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

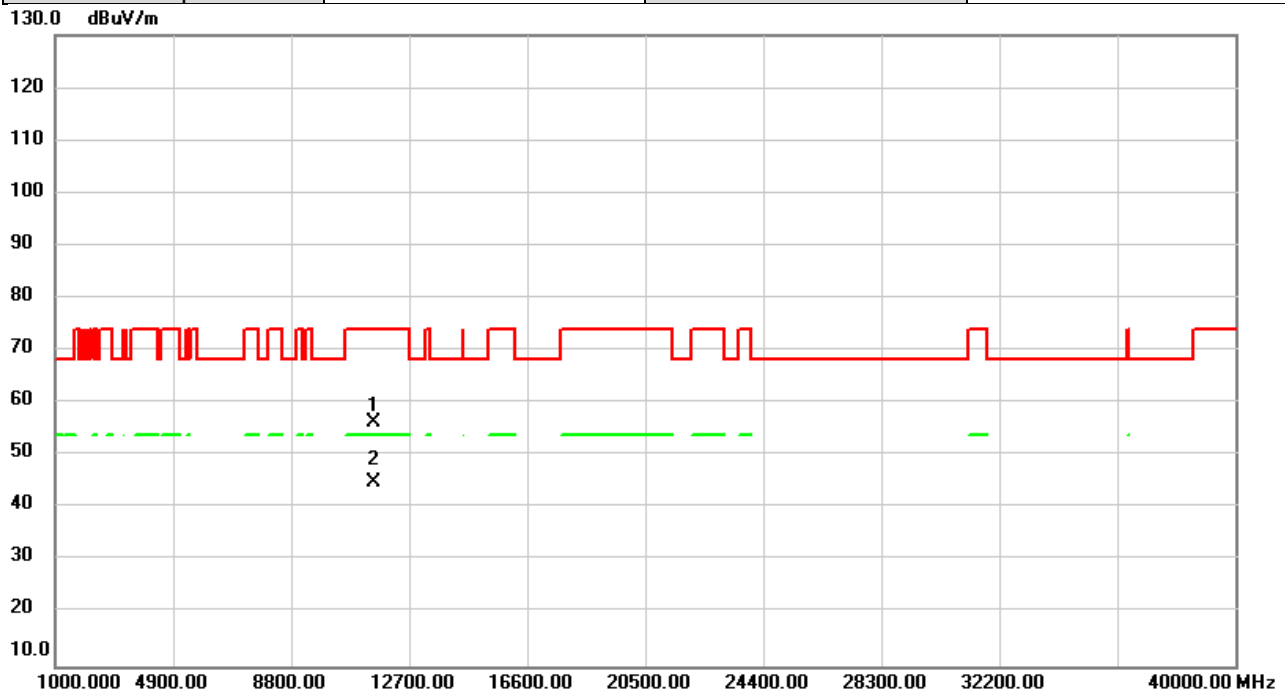


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	51.05	5.22	56.27	74.00	-17.73	peak	
2	*	11510.00	39.71	5.22	44.93	54.00	-9.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5795MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

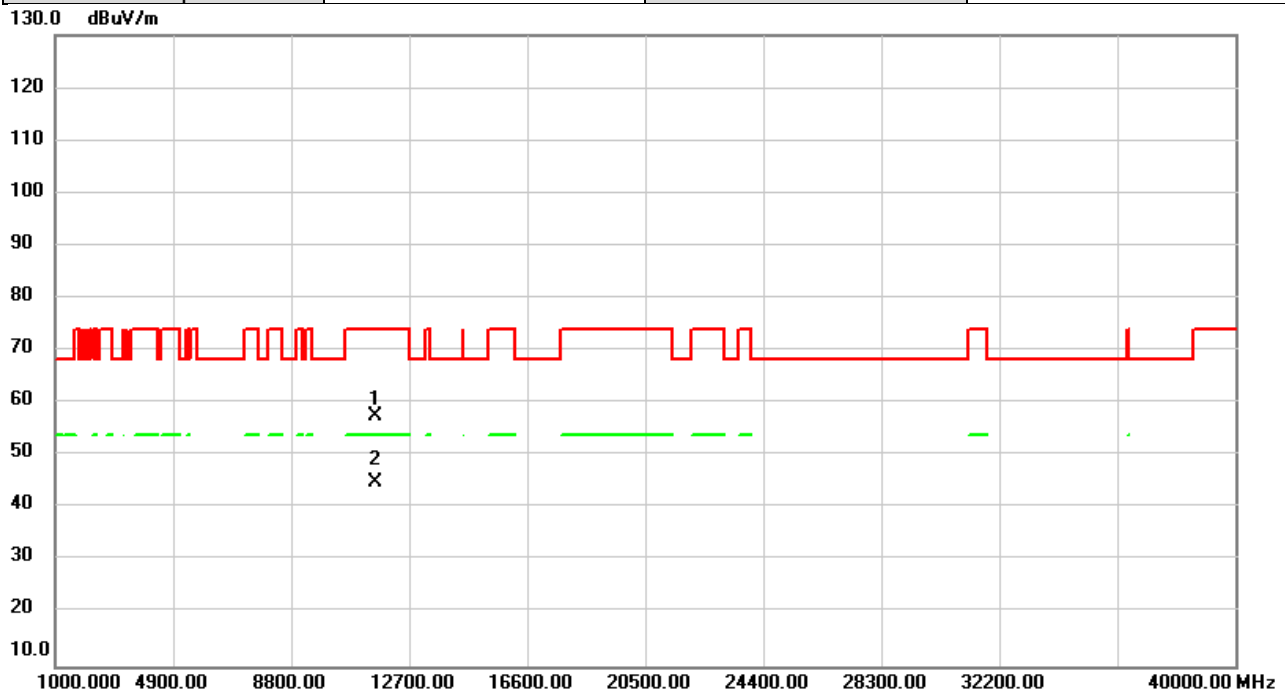


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	52.43	5.00	57.43	74.00	-16.57	peak	
2	*	11590.00	39.84	5.00	44.84	54.00	-9.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT40)	Test Date	2021/11/4
Test Frequency	5795MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

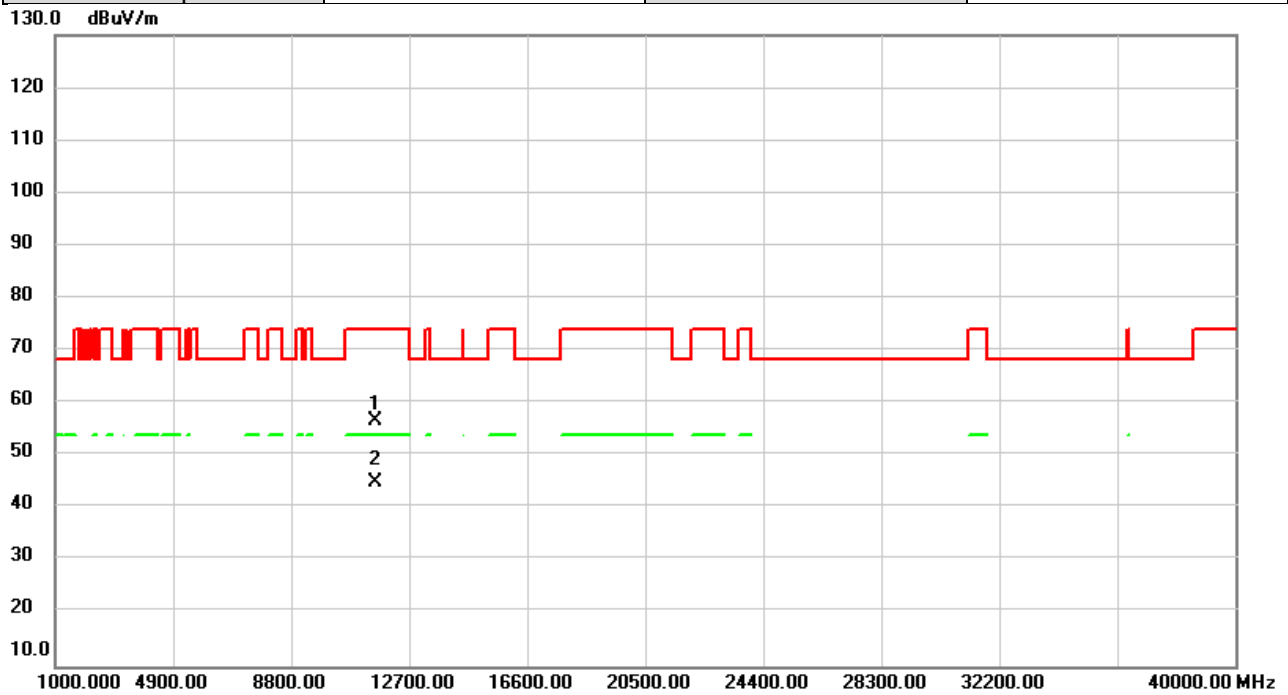


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	51.70	5.00	56.70	74.00	-17.30	peak	
2	*	11590.00	40.07	5.00	45.07	54.00	-8.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5210MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

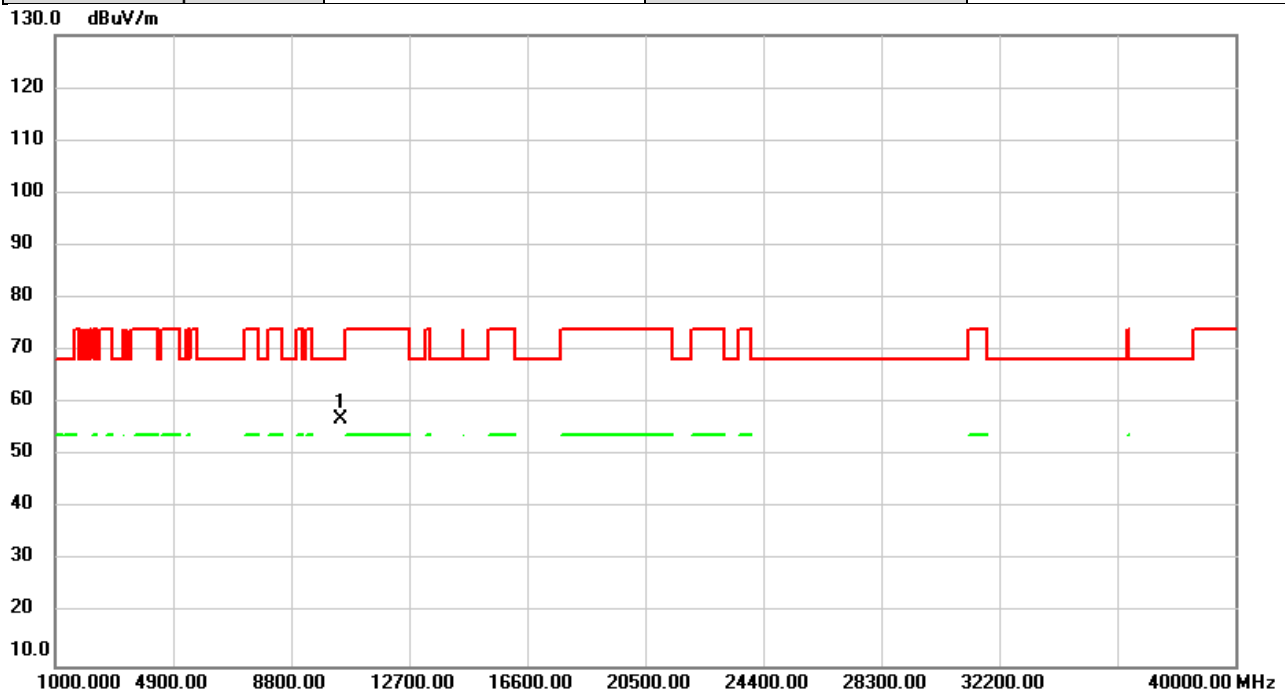


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	52.23	4.60	56.83	68.20	-11.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5210MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

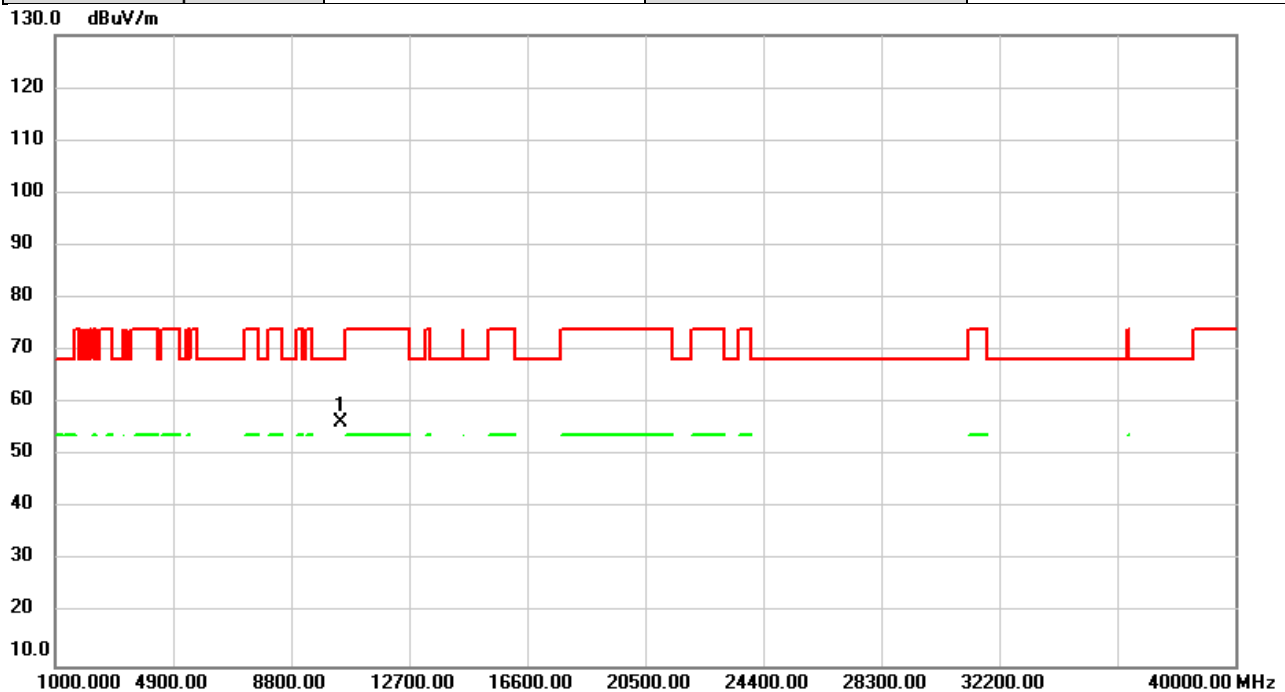


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	51.72	4.60	56.32	68.20	-11.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5290MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

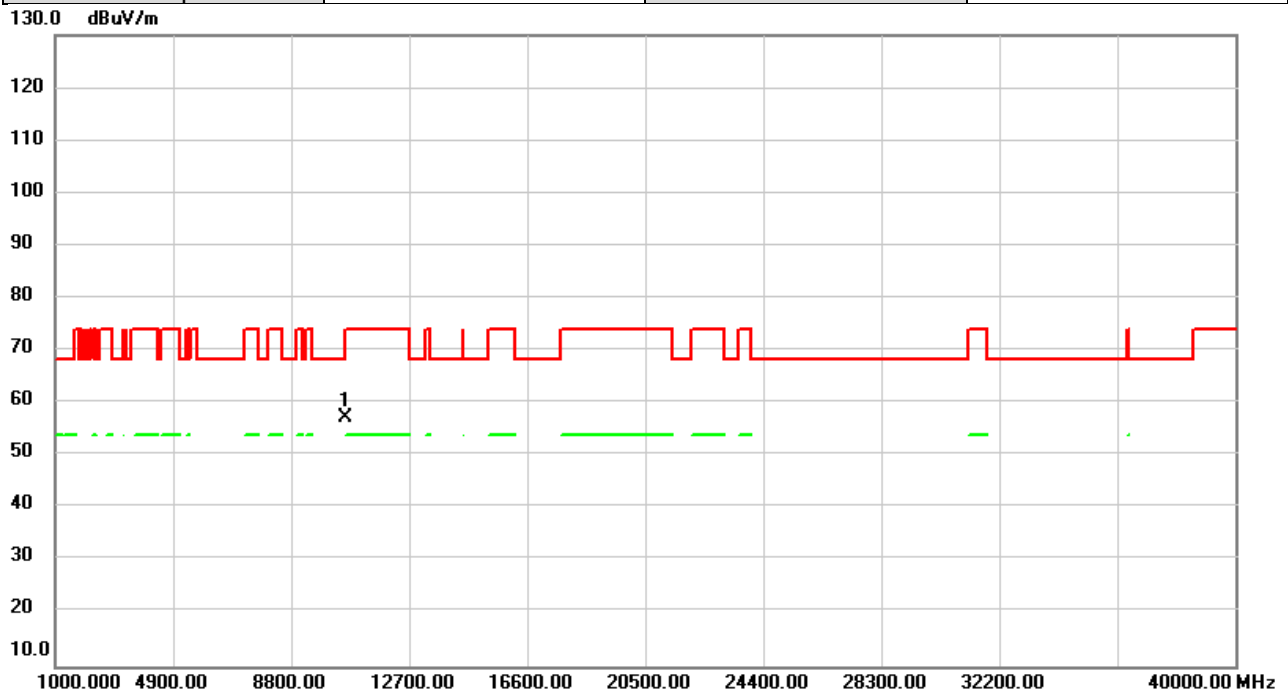


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	52.18	5.05	57.23	68.20	-10.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5290MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

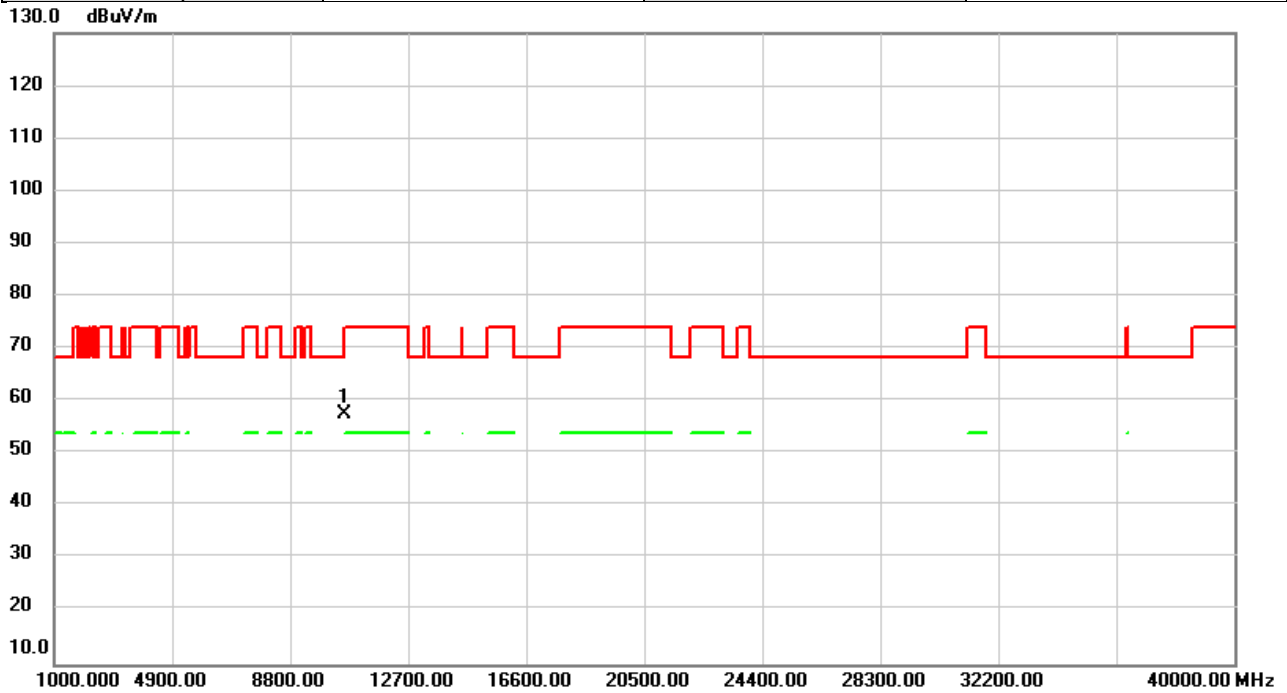


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	52.39	5.05	57.44	68.20	-10.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5530MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

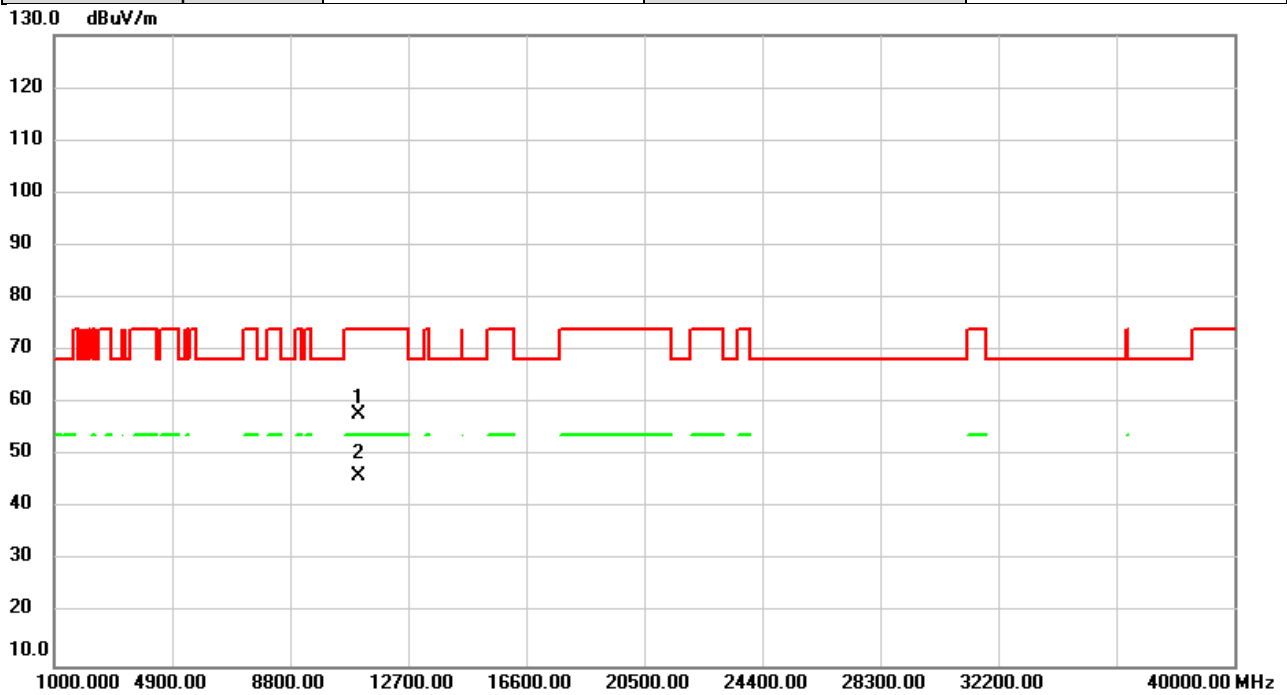


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	51.73	6.15	57.88	74.00	-16.12	peak	
2	*	11060.00	39.91	6.15	46.06	54.00	-7.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5530MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

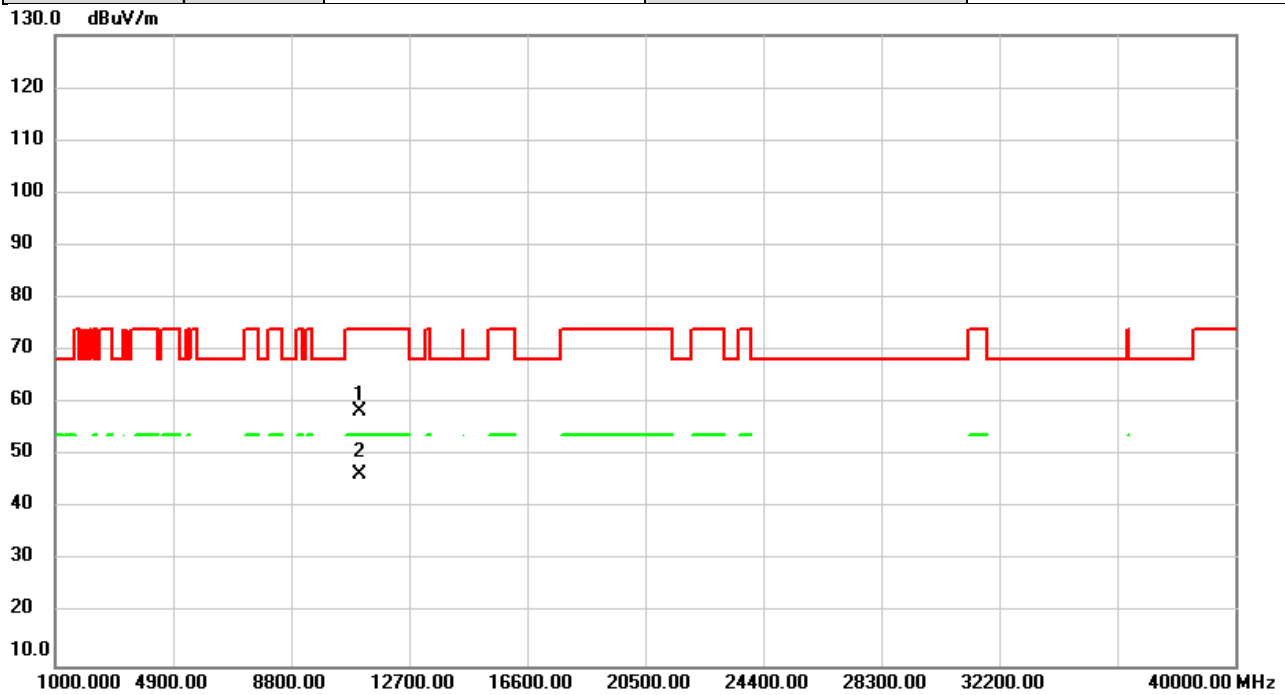


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	52.20	6.15	58.35	74.00	-15.65	peak	
2	*	11060.00	40.31	6.15	46.46	54.00	-7.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5610MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

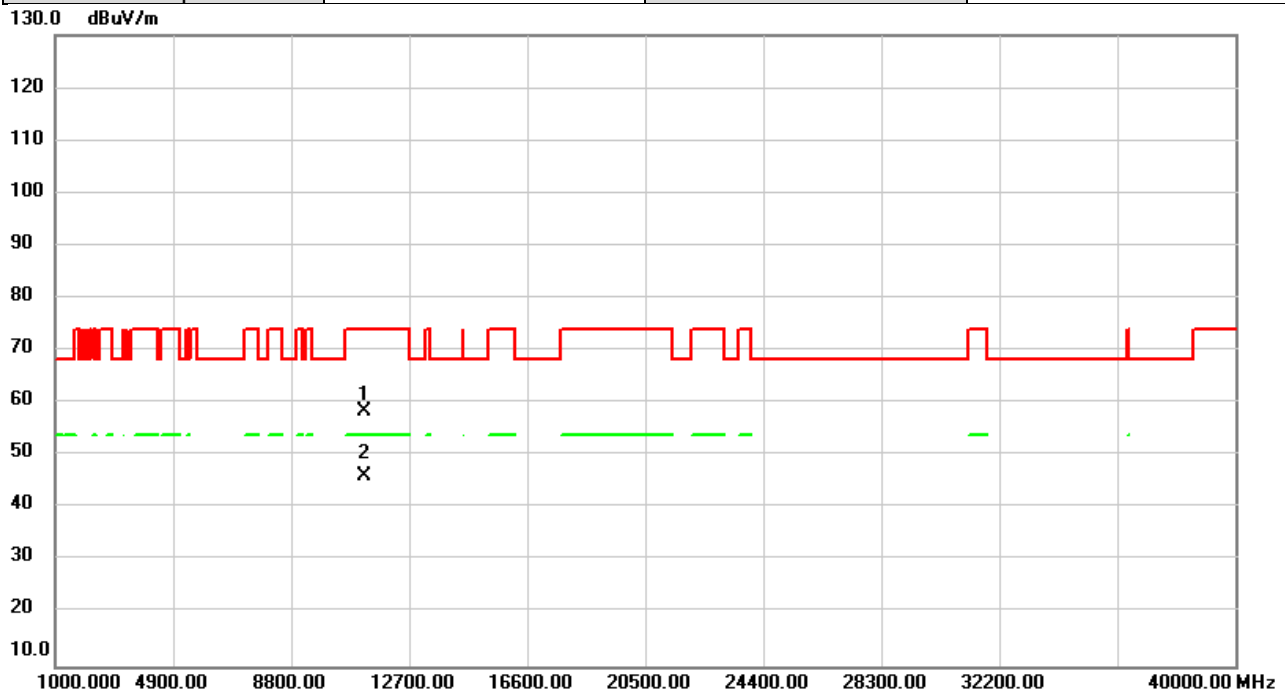


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	52.60	5.81	58.41	74.00	-15.59	peak	
2	*	11220.00	40.32	5.81	46.13	54.00	-7.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5610MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

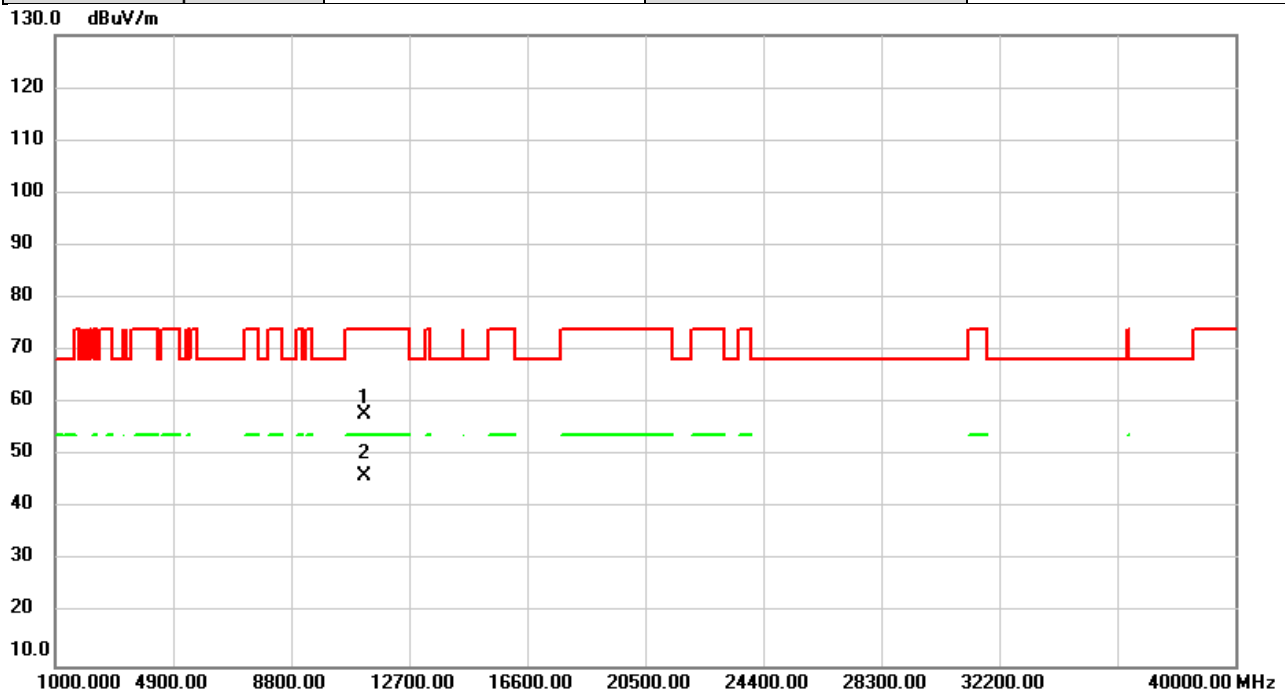


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	52.13	5.81	57.94	74.00	-16.06	peak	
2	*	11220.00	40.44	5.81	46.25	54.00	-7.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5690MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

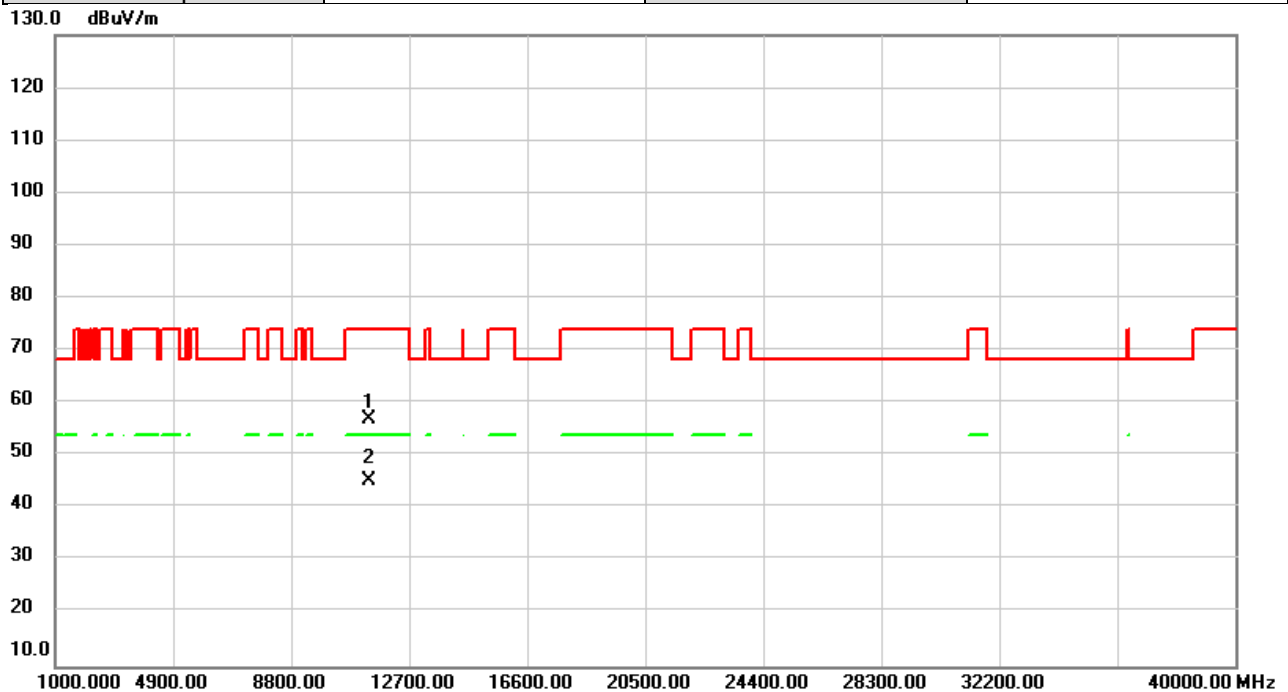


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11380.00	51.40	5.49	56.89	74.00	-17.11	peak	
2	*	11380.00	39.89	5.49	45.38	54.00	-8.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5690MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

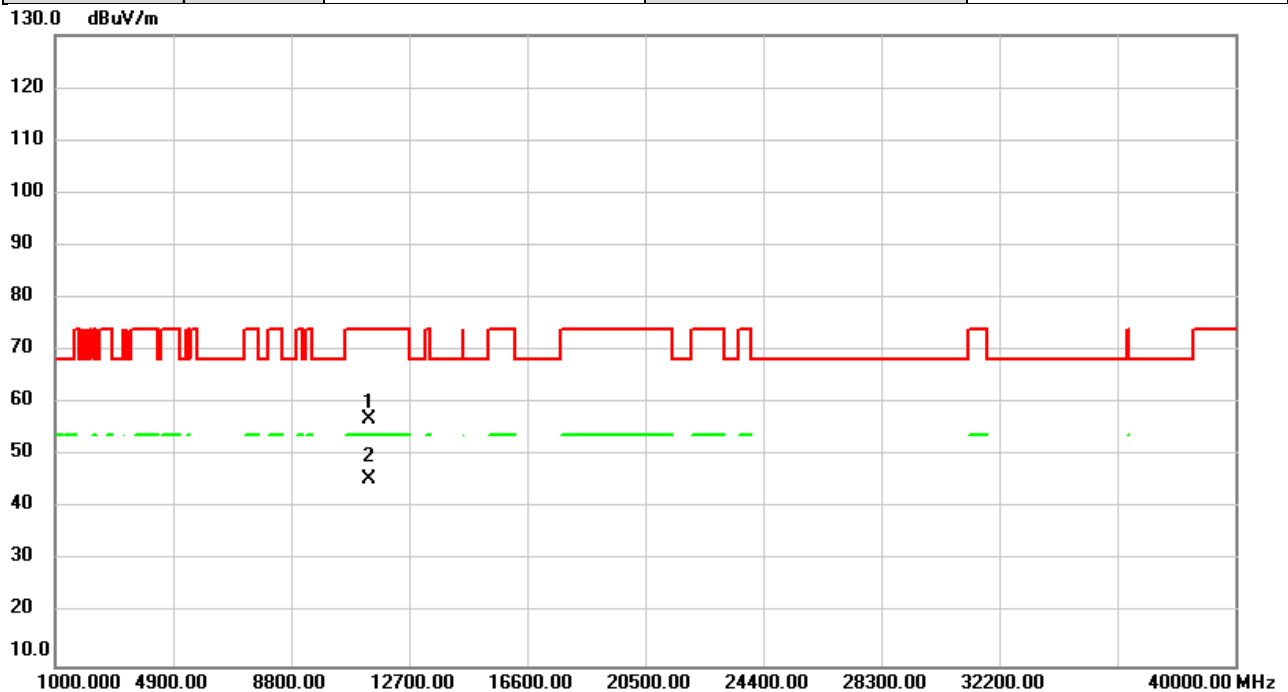


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11380.00	51.37	5.49	56.86	74.00	-17.14	peak	
2	*	11380.00	39.99	5.49	45.48	54.00	-8.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5775MHz	Polarization	Vertical
Temp	23°C	Hum.	67%

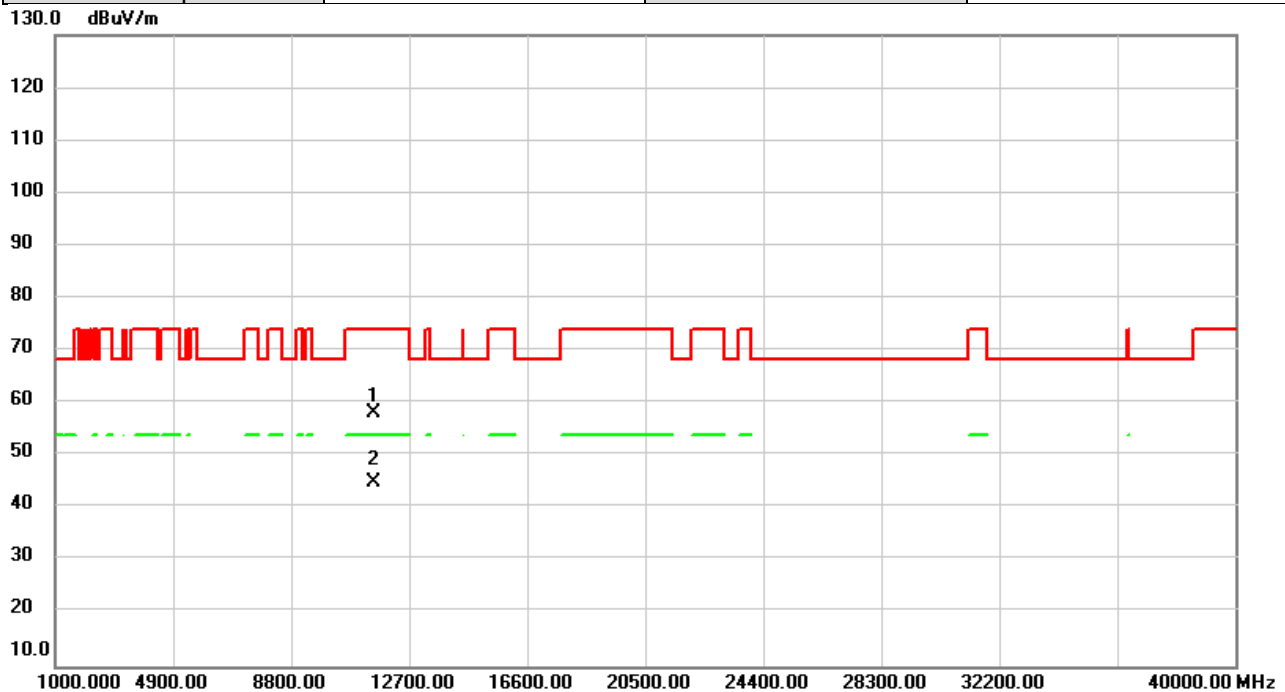


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	52.90	5.11	58.01	74.00	-15.99	peak	
2	*	11550.00	39.73	5.11	44.84	54.00	-9.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE802.11ac (VHT80)	Test Date	2021/11/4
Test Frequency	5775MHz	Polarization	Horizontal
Temp	23°C	Hum.	67%

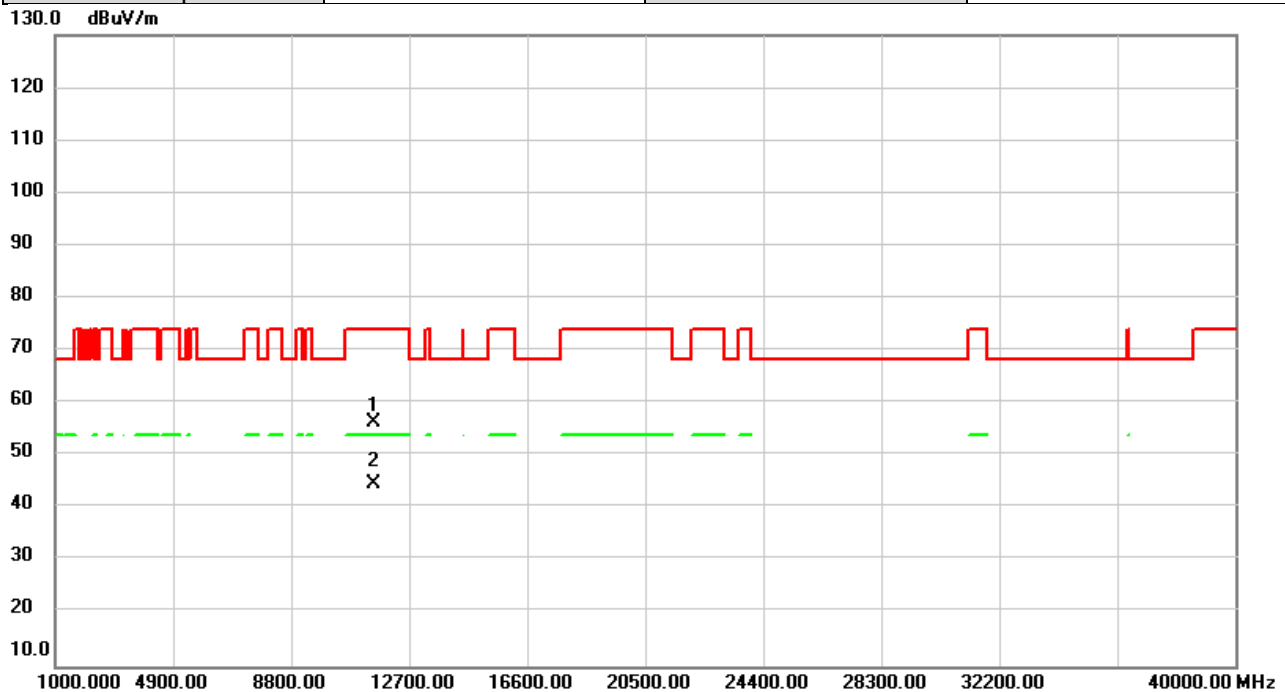

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	51.24	5.11	56.35	74.00	-17.65	peak	
2	*	11550.00	39.45	5.11	44.56	54.00	-9.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D OUTPUT POWER

Test Mode	IEEE 802.11a_Main	Tested Date	2021/11/2
-----------	-------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	12.85	0.0193	23.98	0.2500	Pass
5200	12.57	0.0181	23.98	0.2500	Pass
5240	12.77	0.0189	23.98	0.2500	Pass
5260	12.87	0.0194	23.98	0.2500	Pass
5300	12.67	0.0185	23.98	0.2500	Pass
5320	12.73	0.0187	23.98	0.2500	Pass
5500	12.75	0.0188	23.98	0.2500	Pass
5580	12.77	0.0189	23.98	0.2500	Pass
5700	12.94	0.0197	23.98	0.2500	Pass
5745	12.35	0.0172	30.00	1.0000	Pass
5785	12.82	0.0191	30.00	1.0000	Pass
5825	12.97	0.0198	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Aux	Tested Date	2021/11/2
-----------	------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	12.95	0.0197	23.98	0.2500	Pass
5200	12.60	0.0182	23.98	0.2500	Pass
5240	12.81	0.0191	23.98	0.2500	Pass
5260	12.91	0.0195	23.98	0.2500	Pass
5300	12.95	0.0197	23.98	0.2500	Pass
5320	12.91	0.0195	23.98	0.2500	Pass
5500	12.71	0.0187	23.98	0.2500	Pass
5580	12.77	0.0189	23.98	0.2500	Pass
5700	12.54	0.0179	23.98	0.2500	Pass
5745	12.41	0.0174	30.00	1.0000	Pass
5785	12.92	0.0196	30.00	1.0000	Pass
5825	12.75	0.0188	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Total	Tested Date	2021/11/2
-----------	--------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	15.91	0.0390	23.98	0.2500	Pass
5200	15.60	0.0363	23.98	0.2500	Pass
5240	15.80	0.0380	23.98	0.2500	Pass
5260	15.90	0.0389	23.98	0.2500	Pass
5300	15.82	0.0382	23.98	0.2500	Pass
5320	15.83	0.0383	23.98	0.2500	Pass
5500	15.74	0.0375	23.98	0.2500	Pass
5580	15.78	0.0378	23.98	0.2500	Pass
5700	15.75	0.0376	23.98	0.2500	Pass
5745	15.39	0.0346	30.00	1.0000	Pass
5785	15.88	0.0387	30.00	1.0000	Pass
5825	15.87	0.0387	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Main	Tested Date	2021/11/2
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	12.81	0.0191	23.98	0.2500	Pass
5200	12.79	0.0190	23.98	0.2500	Pass
5240	12.81	0.0191	23.98	0.2500	Pass
5260	12.90	0.0195	23.98	0.2500	Pass
5300	12.91	0.0195	23.98	0.2500	Pass
5320	12.89	0.0195	23.98	0.2500	Pass
5500	12.91	0.0195	23.98	0.2500	Pass
5580	12.81	0.0191	23.98	0.2500	Pass
5700	12.83	0.0192	23.98	0.2500	Pass
5745	12.37	0.0173	30.00	1.0000	Pass
5785	12.85	0.0193	30.00	1.0000	Pass
5825	12.81	0.0191	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Aux	Tested Date	2021/11/2
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	12.91	0.0195	23.98	0.2500	Pass
5200	12.90	0.0195	23.98	0.2500	Pass
5240	12.90	0.0195	23.98	0.2500	Pass
5260	12.91	0.0195	23.98	0.2500	Pass
5300	12.93	0.0196	23.98	0.2500	Pass
5320	12.94	0.0197	23.98	0.2500	Pass
5500	12.92	0.0196	23.98	0.2500	Pass
5580	12.89	0.0195	23.98	0.2500	Pass
5700	12.89	0.0195	23.98	0.2500	Pass
5745	12.42	0.0175	30.00	1.0000	Pass
5785	12.91	0.0195	30.00	1.0000	Pass
5825	12.89	0.0195	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Total	Tested Date	2021/11/2
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	15.87	0.0386	23.98	0.2500	Pass
5200	15.86	0.0385	23.98	0.2500	Pass
5240	15.87	0.0386	23.98	0.2500	Pass
5260	15.92	0.0390	23.98	0.2500	Pass
5300	15.93	0.0392	23.98	0.2500	Pass
5320	15.93	0.0391	23.98	0.2500	Pass
5500	15.93	0.0391	23.98	0.2500	Pass
5580	15.86	0.0386	23.98	0.2500	Pass
5700	15.87	0.0386	23.98	0.2500	Pass
5745	15.41	0.0347	30.00	1.0000	Pass
5785	15.89	0.0388	30.00	1.0000	Pass
5825	15.86	0.0386	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Main	Tested Date	2021/11/2
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	9.37	0.0086	23.98	0.2500	Pass
5230	12.38	0.0173	23.98	0.2500	Pass
5270	12.37	0.0173	23.98	0.2500	Pass
5310	11.85	0.0153	23.98	0.2500	Pass
5510	9.38	0.0087	23.98	0.2500	Pass
5550	12.39	0.0173	23.98	0.2500	Pass
5670	12.37	0.0173	23.98	0.2500	Pass
5755	12.37	0.0173	30.00	1.0000	Pass
5795	9.35	0.0086	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Aux	Tested Date	2021/11/2
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	9.45	0.0088	23.98	0.2500	Pass
5230	12.47	0.0177	23.98	0.2500	Pass
5270	12.42	0.0175	23.98	0.2500	Pass
5310	11.91	0.0155	23.98	0.2500	Pass
5510	9.42	0.0087	23.98	0.2500	Pass
5550	12.41	0.0174	23.98	0.2500	Pass
5670	12.43	0.0175	23.98	0.2500	Pass
5755	12.41	0.0174	30.00	1.0000	Pass
5795	9.40	0.0087	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Total	Tested Date	2021/11/2
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	12.42	0.0175	23.98	0.2500	Pass
5230	15.44	0.0350	23.98	0.2500	Pass
5270	15.41	0.0347	23.98	0.2500	Pass
5310	14.89	0.0308	23.98	0.2500	Pass
5510	12.41	0.0174	23.98	0.2500	Pass
5550	15.41	0.0348	23.98	0.2500	Pass
5670	15.41	0.0348	23.98	0.2500	Pass
5755	15.40	0.0347	30.00	1.0000	Pass
5795	12.39	0.0173	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Main	Tested Date	2021/11/2
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	12.88	0.0194	23.98	0.2500	Pass
5200	12.85	0.0193	23.98	0.2500	Pass
5240	12.87	0.0194	23.98	0.2500	Pass
5260	12.91	0.0195	23.98	0.2500	Pass
5300	12.93	0.0196	23.98	0.2500	Pass
5320	12.91	0.0195	23.98	0.2500	Pass
5500	12.93	0.0196	23.98	0.2500	Pass
5580	12.91	0.0195	23.98	0.2500	Pass
5700	12.91	0.0195	23.98	0.2500	Pass
5745	12.42	0.0175	30.00	1.0000	Pass
5785	12.89	0.0195	30.00	1.0000	Pass
5825	12.88	0.0194	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Aux	Tested Date	2021/11/2
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	12.95	0.0197	23.98	0.2500	Pass
5200	12.93	0.0196	23.98	0.2500	Pass
5240	12.92	0.0196	23.98	0.2500	Pass
5260	12.94	0.0197	23.98	0.2500	Pass
5300	12.95	0.0197	23.98	0.2500	Pass
5320	12.96	0.0198	23.98	0.2500	Pass
5500	12.95	0.0197	23.98	0.2500	Pass
5580	12.93	0.0196	23.98	0.2500	Pass
5700	12.97	0.0198	23.98	0.2500	Pass
5745	12.47	0.0177	30.00	1.0000	Pass
5785	12.95	0.0197	30.00	1.0000	Pass
5825	12.92	0.0196	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Total	Tested Date	2021/11/2
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	15.93	0.0391	23.98	0.2500	Pass
5200	15.90	0.0389	23.98	0.2500	Pass
5240	15.91	0.0390	23.98	0.2500	Pass
5260	15.94	0.0392	23.98	0.2500	Pass
5300	15.95	0.0394	23.98	0.2500	Pass
5320	15.95	0.0393	23.98	0.2500	Pass
5500	15.95	0.0394	23.98	0.2500	Pass
5580	15.93	0.0392	23.98	0.2500	Pass
5700	15.95	0.0394	23.98	0.2500	Pass
5745	15.46	0.0351	30.00	1.0000	Pass
5785	15.93	0.0392	30.00	1.0000	Pass
5825	15.91	0.0390	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Main	Tested Date	2021/11/2
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	9.42	0.0087	23.98	0.2500	Pass
5230	12.44	0.0175	23.98	0.2500	Pass
5270	12.43	0.0175	23.98	0.2500	Pass
5310	11.89	0.0155	23.98	0.2500	Pass
5510	9.44	0.0088	23.98	0.2500	Pass
5550	12.45	0.0176	23.98	0.2500	Pass
5670	12.39	0.0173	23.98	0.2500	Pass
5755	12.39	0.0173	30.00	1.0000	Pass
5795	9.38	0.0087	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Aux	Tested Date	2021/11/2
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	9.48	0.0089	23.98	0.2500	Pass
5230	12.48	0.0177	23.98	0.2500	Pass
5270	12.47	0.0177	23.98	0.2500	Pass
5310	11.97	0.0157	23.98	0.2500	Pass
5510	9.49	0.0089	23.98	0.2500	Pass
5550	12.47	0.0177	23.98	0.2500	Pass
5670	12.46	0.0176	23.98	0.2500	Pass
5755	12.44	0.0175	30.00	1.0000	Pass
5795	9.47	0.0089	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Total	Tested Date	2021/11/2
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	12.46	0.0176	23.98	0.2500	Pass
5230	15.47	0.0352	23.98	0.2500	Pass
5270	15.46	0.0352	23.98	0.2500	Pass
5310	14.94	0.0312	23.98	0.2500	Pass
5510	12.48	0.0177	23.98	0.2500	Pass
5550	15.47	0.0352	23.98	0.2500	Pass
5670	15.44	0.0350	23.98	0.2500	Pass
5755	15.43	0.0349	30.00	1.0000	Pass
5795	12.44	0.0175	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Main	Tested Date	2021/11/2
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	8.31	0.0068	23.98	0.2500	Pass
5290	9.89	0.0097	23.98	0.2500	Pass
5530	9.81	0.0096	23.98	0.2500	Pass
5610	12.38	0.0173	23.98	0.2500	Pass
5775	7.88	0.0061	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Aux	Tested Date	2021/11/2
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	8.37	0.0069	23.98	0.2500	Pass
5290	9.97	0.0099	23.98	0.2500	Pass
5530	9.95	0.0099	23.98	0.2500	Pass
5610	12.47	0.0177	23.98	0.2500	Pass
5775	7.91	0.0062	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Total	Tested Date	2021/11/2
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	11.35	0.0136	23.98	0.2500	Pass
5290	12.94	0.0197	23.98	0.2500	Pass
5530	12.89	0.0195	23.98	0.2500	Pass
5610	15.44	0.0350	23.98	0.2500	Pass
5775	10.91	0.0123	30.00	1.0000	Pass

For Straddle Channel:

Test Mode	IEEE 802.11a_Main	Tested Date	2021/11/2
-----------	-------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	8.97	0.0079	23.98	0.2500	Pass
5720	3.30	0.0021	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Aux	Tested Date	2021/11/2
-----------	------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	9.08	0.0081	23.98	0.2500	Pass
5720	3.39	0.0022	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Total	Tested Date	2021/11/2
-----------	--------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.04	0.0160	23.98	0.2500	Pass
5720	6.36	0.0043	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Main	Tested Date	2021/11/2
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	9.44	0.0088	23.98	0.2500	Pass
5720	3.27	0.0021	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Aux	Tested Date	2021/11/2
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.92	0.0196	23.98	0.2500	Pass
5720	3.37	0.0022	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Total	Tested Date	2021/11/2
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	14.53	0.0284	23.98	0.2500	Pass
5720	6.33	0.0043	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Main	Tested Date	2021/11/2
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	9.39	0.0087	23.98	0.2500	Pass
5710	2.91	0.0020	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Aux	Tested Date	2021/11/2
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	9.44	0.0088	23.98	0.2500	Pass
5710	3.00	0.0020	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Total	Tested Date	2021/11/2
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	12.43	0.0175	23.98	0.2500	Pass
5710	5.97	0.0039	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Main	Tested Date	2021/11/2
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	9.47	0.0089	23.98	0.2500	Pass
5720	3.33	0.0022	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Aux	Tested Date	2021/11/2
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	9.57	0.0091	23.98	0.2500	Pass
5720	3.41	0.0022	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Total	Tested Date	2021/11/2
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.53	0.0179	23.98	0.2500	Pass
5720	6.38	0.0043	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Main	Tested Date	2021/11/2
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	9.41	0.0087	23.98	0.2500	Pass
5710	2.95	0.0020	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Aux	Tested Date	2021/11/2
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	9.48	0.0089	23.98	0.2500	Pass
5710	3.02	0.0020	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Total	Tested Date	2021/11/2
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	12.46	0.0176	23.98	0.2500	Pass
5710	6.00	0.0040	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Main	Tested Date	2021/11/2
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	9.33	0.0086	23.98	0.2500	Pass
5690	3.07	0.0020	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Aux	Tested Date	2021/11/2
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	9.41	0.0087	23.98	0.2500	Pass
5690	3.10	0.0020	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Total	Tested Date	2021/11/2
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	12.38	0.0173	23.98	0.2500	Pass
5690	6.10	0.0041	30.00	1.0000	Pass

End of Test Report