

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.1 PK                 | 74.0           | -22.9       | 2.74 H             | 205                  | 49.4             | 1.7                      |
| 2                                                    | 5150.00         | 39.5 AV                 | 54.0           | -14.5       | 2.74 H             | 205                  | 37.8             | 1.7                      |
| 3                                                    | *5200.00        | 102.6 PK                |                |             | 2.74 H             | 205                  | 101.2            | 1.4                      |
| 4                                                    | *5200.00        | 92.6 AV                 |                |             | 2.74 H             | 205                  | 91.2             | 1.4                      |
| 5                                                    | #10390.00       | 49.4 PK                 | 68.2           | -18.8       | 2.30 H             | 105                  | 37.9             | 11.5                     |
| 6                                                    | 15585.00        | 47.0 PK                 | 74.0           | -27.0       | 1.25 H             | 93                   | 35.4             | 11.6                     |
| 7                                                    | 15585.00        | 33.0 AV                 | 54.0           | -21.0       | 1.25 H             | 93                   | 21.4             | 11.6                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 53.8 PK                 | 74.0           | -20.2       | 1.49 V             | 339                  | 52.1             | 1.7                      |
| 2                                                  | 5150.00         | 40.4 AV                 | 54.0           | -13.6       | 1.49 V             | 339                  | 38.7             | 1.7                      |
| 3                                                  | *5200.00        | 109.0 PK                |                |             | 1.49 V             | 339                  | 107.6            | 1.4                      |
| 4                                                  | *5200.00        | 98.6 AV                 |                |             | 1.49 V             | 339                  | 97.2             | 1.4                      |
| 5                                                  | #10390.00       | 48.4 PK                 | 68.2           | -19.8       | 1.21 V             | 128                  | 36.9             | 11.5                     |
| 6                                                  | 15585.00        | 46.8 PK                 | 74.0           | -27.2       | 2.07 V             | 67                   | 35.2             | 11.6                     |
| 7                                                  | 15585.00        | 32.3 AV                 | 54.0           | -21.7       | 2.07 V             | 67                   | 20.7             | 11.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.0 PK                 | 74.0           | -23.0       | 2.78 H             | 201                  | 49.3             | 1.7                      |
| 2                                                    | 5150.00         | 39.4 AV                 | 54.0           | -14.6       | 2.78 H             | 201                  | 37.7             | 1.7                      |
| 3                                                    | *5240.00        | 102.9 PK                |                |             | 2.78 H             | 201                  | 101.7            | 1.2                      |
| 4                                                    | *5240.00        | 93.1 AV                 |                |             | 2.78 H             | 201                  | 91.9             | 1.2                      |
| 5                                                    | #10490.00       | 48.4 PK                 | 68.2           | -19.8       | 2.24 H             | 95                   | 37.0             | 11.4                     |
| 6                                                    | 15735.00        | 47.3 PK                 | 74.0           | -26.7       | 1.32 H             | 70                   | 36.3             | 11.0                     |
| 7                                                    | 15735.00        | 33.0 AV                 | 54.0           | -21.0       | 1.32 H             | 70                   | 22.0             | 11.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 53.2 PK                 | 74.0           | -20.8       | 1.49 V             | 342                  | 51.5             | 1.7                      |
| 2                                                    | 5150.00         | 39.8 AV                 | 54.0           | -14.2       | 1.49 V             | 342                  | 38.1             | 1.7                      |
| 3                                                    | *5240.00        | 109.3 PK                |                |             | 1.49 V             | 342                  | 108.1            | 1.2                      |
| 4                                                    | *5240.00        | 99.2 AV                 |                |             | 1.49 V             | 342                  | 98.0             | 1.2                      |
| 5                                                    | #10490.00       | 48.0 PK                 | 68.2           | -20.2       | 1.31 V             | 118                  | 36.6             | 11.4                     |
| 6                                                    | 15735.00        | 47.1 PK                 | 74.0           | -26.9       | 2.07 V             | 78                   | 36.1             | 11.0                     |
| 7                                                    | 15735.00        | 32.6 AV                 | 54.0           | -21.4       | 2.07 V             | 78                   | 21.6             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 102.6 PK                |                |             | 2.76 H             | 202                  | 101.4            | 1.2                      |
| 2                                                    | *5260.00        | 93.2 AV                 |                |             | 2.76 H             | 202                  | 92.0             | 1.2                      |
| 3                                                    | 5350.00         | 50.6 PK                 | 74.0           | -23.4       | 2.76 H             | 202                  | 49.2             | 1.4                      |
| 4                                                    | 5350.00         | 39.3 AV                 | 54.0           | -14.7       | 2.76 H             | 202                  | 37.9             | 1.4                      |
| 5                                                    | #10510.00       | 48.5 PK                 | 68.2           | -19.7       | 2.24 H             | 92                   | 37.1             | 11.4                     |
| 6                                                    | 15765.00        | 47.9 PK                 | 74.0           | -26.1       | 1.31 H             | 96                   | 37.1             | 10.8                     |
| 7                                                    | 15765.00        | 33.6 AV                 | 54.0           | -20.4       | 1.31 H             | 96                   | 22.8             | 10.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5260.00        | 109.3 PK                |                |             | 1.54 V             | 324                  | 108.1            | 1.2                      |
| 2                                                  | *5260.00        | 99.2 AV                 |                |             | 1.54 V             | 324                  | 98.0             | 1.2                      |
| 3                                                  | 5350.00         | 53.5 PK                 | 74.0           | -20.5       | 1.54 V             | 324                  | 52.1             | 1.4                      |
| 4                                                  | 5350.00         | 39.8 AV                 | 54.0           | -14.2       | 1.54 V             | 324                  | 38.4             | 1.4                      |
| 5                                                  | #10510.00       | 47.8 PK                 | 68.2           | -20.4       | 1.20 V             | 108                  | 36.4             | 11.4                     |
| 6                                                  | 15765.00        | 47.6 PK                 | 74.0           | -26.4       | 2.00 V             | 55                   | 36.8             | 10.8                     |
| 7                                                  | 15765.00        | 33.0 AV                 | 54.0           | -21.0       | 2.00 V             | 55                   | 22.2             | 10.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 60 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 103.5 PK                |                |             | 2.79 H             | 211                  | 102.3            | 1.2                      |
| 2                                                    | *5300.00        | 93.2 AV                 |                |             | 2.79 H             | 211                  | 92.0             | 1.2                      |
| 3                                                    | 5350.00         | 50.8 PK                 | 74.0           | -23.2       | 2.79 H             | 211                  | 49.4             | 1.4                      |
| 4                                                    | 5350.00         | 39.8 AV                 | 54.0           | -14.2       | 2.79 H             | 211                  | 38.4             | 1.4                      |
| 5                                                    | 10610.50        | 48.3 PK                 | 74.0           | -25.7       | 2.27 H             | 89                   | 36.5             | 11.8                     |
| 6                                                    | 10610.50        | 36.5 AV                 | 54.0           | -17.5       | 2.27 H             | 89                   | 24.7             | 11.8                     |
| 7                                                    | 15915.75        | 46.7 PK                 | 74.0           | -27.3       | 1.28 H             | 88                   | 36.0             | 10.7                     |
| 8                                                    | 15915.75        | 32.6 AV                 | 54.0           | -21.4       | 1.28 H             | 88                   | 21.9             | 10.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5300.00        | 109.9 PK                |                |             | 1.47 V             | 338                  | 108.7            | 1.2                      |
| 2                                                  | *5300.00        | 99.4 AV                 |                |             | 1.47 V             | 338                  | 98.2             | 1.2                      |
| 3                                                  | 5350.00         | 53.7 PK                 | 74.0           | -20.3       | 1.47 V             | 338                  | 52.3             | 1.4                      |
| 4                                                  | 5350.00         | 40.4 AV                 | 54.0           | -13.6       | 1.47 V             | 338                  | 39.0             | 1.4                      |
| 5                                                  | 10610.50        | 47.9 PK                 | 74.0           | -26.1       | 1.04 V             | 93                   | 36.1             | 11.8                     |
| 6                                                  | 10610.50        | 36.3 AV                 | 54.0           | -17.7       | 1.04 V             | 93                   | 24.5             | 11.8                     |
| 7                                                  | 15915.75        | 47.2 PK                 | 74.0           | -26.8       | 1.98 V             | 88                   | 36.5             | 10.7                     |
| 8                                                  | 15915.75        | 33.3 AV                 | 54.0           | -20.7       | 1.98 V             | 88                   | 22.6             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 64 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 105.0 PK                |                |             | 2.78 H             | 214                  | 103.6            | 1.4                      |
| 2                                                    | *5320.00        | 94.0 AV                 |                |             | 2.78 H             | 214                  | 92.6             | 1.4                      |
| 3                                                    | 5350.00         | 50.8 PK                 | 74.0           | -23.2       | 2.78 H             | 214                  | 49.4             | 1.4                      |
| 4                                                    | 5350.00         | 39.0 AV                 | 54.0           | -15.0       | 2.78 H             | 214                  | 37.6             | 1.4                      |
| 5                                                    | 10650.00        | 49.3 PK                 | 74.0           | -24.7       | 2.18 H             | 98                   | 37.4             | 11.9                     |
| 6                                                    | 10650.00        | 37.0 AV                 | 54.0           | -17.0       | 2.18 H             | 98                   | 25.1             | 11.9                     |
| 7                                                    | 15975.00        | 47.3 PK                 | 74.0           | -26.7       | 1.30 H             | 85                   | 36.4             | 10.9                     |
| 8                                                    | 15975.00        | 33.5 AV                 | 54.0           | -20.5       | 1.30 H             | 85                   | 22.6             | 10.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 108.8 PK                |                |             | 1.39 V             | 339                  | 107.4            | 1.4                      |
| 2                                                    | *5320.00        | 98.2 AV                 |                |             | 1.39 V             | 339                  | 96.8             | 1.4                      |
| 3                                                    | 5350.00         | 50.4 PK                 | 74.0           | -23.6       | 1.39 V             | 339                  | 49.0             | 1.4                      |
| 4                                                    | 5350.00         | 39.1 AV                 | 54.0           | -14.9       | 1.39 V             | 339                  | 37.7             | 1.4                      |
| 5                                                    | 10650.00        | 47.1 PK                 | 74.0           | -26.9       | 1.24 V             | 110                  | 35.2             | 11.9                     |
| 6                                                    | 10650.00        | 35.6 AV                 | 54.0           | -18.4       | 1.24 V             | 110                  | 23.7             | 11.9                     |
| 7                                                    | 15975.00        | 47.2 PK                 | 74.0           | -26.8       | 2.06 V             | 60                   | 36.3             | 10.9                     |
| 8                                                    | 15975.00        | 32.7 AV                 | 54.0           | -21.3       | 2.06 V             | 60                   | 21.8             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 52.6 PK                 | 74.0           | -21.4       | 2.75 H             | 210                  | 51.0             | 1.6                      |
| 2                                                    | 5460.00         | 39.0 AV                 | 54.0           | -15.0       | 2.75 H             | 210                  | 37.4             | 1.6                      |
| 3                                                    | #5462.60        | 51.4 PK                 | 68.2           | -16.8       | 2.75 H             | 210                  | 49.8             | 1.6                      |
| 4                                                    | *5500.00        | 103.9 PK                |                |             | 2.75 H             | 210                  | 102.2            | 1.7                      |
| 5                                                    | *5500.00        | 93.3 AV                 |                |             | 2.75 H             | 210                  | 91.6             | 1.7                      |
| 6                                                    | 10989.00        | 49.3 PK                 | 74.0           | -24.7       | 2.29 H             | 98                   | 37.1             | 12.2                     |
| 7                                                    | 10989.00        | 37.1 AV                 | 54.0           | -16.9       | 2.29 H             | 98                   | 24.9             | 12.2                     |
| 8                                                    | #16483.50       | 46.8 PK                 | 68.2           | -21.4       | 1.25 H             | 92                   | 33.5             | 13.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.0 PK                 | 74.0           | -23.0       | 1.37 V             | 342                  | 49.4             | 1.6                      |
| 2                                                    | 5460.00         | 39.6 AV                 | 54.0           | -14.4       | 1.37 V             | 342                  | 38.0             | 1.6                      |
| 3                                                    | #5470.00        | 55.8 PK                 | 68.2           | -12.4       | 1.37 V             | 342                  | 54.2             | 1.6                      |
| 4                                                    | *5500.00        | 108.0 PK                |                |             | 1.37 V             | 342                  | 106.3            | 1.7                      |
| 5                                                    | *5500.00        | 97.9 AV                 |                |             | 1.37 V             | 342                  | 96.2             | 1.7                      |
| 6                                                    | 10989.00        | 47.6 PK                 | 74.0           | -26.4       | 1.28 V             | 97                   | 35.4             | 12.2                     |
| 7                                                    | 10989.00        | 35.9 AV                 | 54.0           | -18.1       | 1.28 V             | 97                   | 23.7             | 12.2                     |
| 8                                                    | #16483.50       | 46.7 PK                 | 68.2           | -21.5       | 2.08 V             | 77                   | 33.4             | 13.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 103.1 PK                |                |             | 2.78 H             | 218                  | 101.4            | 1.7                      |
| 2                                                    | *5580.00        | 92.6 AV                 |                |             | 2.78 H             | 218                  | 90.9             | 1.7                      |
| 3                                                    | 11150.00        | 48.8 PK                 | 74.0           | -25.2       | 2.27 H             | 114                  | 37.2             | 11.6                     |
| 4                                                    | 11150.00        | 36.6 AV                 | 54.0           | -17.4       | 2.27 H             | 114                  | 25.0             | 11.6                     |
| 5                                                    | #16725.00       | 46.9 PK                 | 68.2           | -21.3       | 1.27 H             | 94                   | 32.2             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 108.8 PK                |                |             | 1.49 V             | 332                  | 107.1            | 1.7                      |
| 2                                                    | *5580.00        | 98.6 AV                 |                |             | 1.49 V             | 332                  | 96.9             | 1.7                      |
| 3                                                    | 11150.00        | 47.5 PK                 | 74.0           | -26.5       | 1.31 V             | 127                  | 35.9             | 11.6                     |
| 4                                                    | 11150.00        | 35.9 AV                 | 54.0           | -18.1       | 1.31 V             | 127                  | 24.3             | 11.6                     |
| 5                                                    | #16725.00       | 47.0 PK                 | 68.2           | -21.2       | 2.00 V             | 61                   | 32.3             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 103.2 PK                |                |             | 2.73 H             | 202                  | 101.4            | 1.8                      |
| 2                                                    | *5700.00        | 94.0 AV                 |                |             | 2.73 H             | 202                  | 92.2             | 1.8                      |
| 3                                                    | #5725.00        | 53.2 PK                 | 68.2           | -15.0       | 2.73 H             | 202                  | 51.3             | 1.9                      |
| 4                                                    | 11410.00        | 49.4 PK                 | 74.0           | -24.6       | 2.20 H             | 109                  | 36.6             | 12.8                     |
| 5                                                    | 11410.00        | 37.2 AV                 | 54.0           | -16.8       | 2.20 H             | 109                  | 24.4             | 12.8                     |
| 6                                                    | #17115.00       | 46.6 PK                 | 68.2           | -21.6       | 1.22 H             | 76                   | 30.4             | 16.2                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5700.00        | 109.0 PK                |                |             | 1.46 V             | 317                  | 107.2            | 1.8                      |
| 2                                                  | *5700.00        | 99.0 AV                 |                |             | 1.46 V             | 317                  | 97.2             | 1.8                      |
| 3                                                  | #5725.00        | 54.1 PK                 | 68.2           | -14.1       | 1.46 V             | 317                  | 52.2             | 1.9                      |
| 4                                                  | 11410.00        | 48.1 PK                 | 74.0           | -25.9       | 1.24 V             | 118                  | 35.3             | 12.8                     |
| 5                                                  | 11410.00        | 36.4 AV                 | 54.0           | -17.6       | 1.24 V             | 118                  | 23.6             | 12.8                     |
| 6                                                  | #17115.00       | 47.1 PK                 | 68.2           | -21.1       | 2.04 V             | 66                   | 30.9             | 16.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 50.9 PK                 | 74.0           | -23.1       | 2.75 H             | 201                  | 49.3             | 1.6                      |
| 2                                                    | 5460.00         | 39.0 AV                 | 54.0           | -15.0       | 2.75 H             | 201                  | 37.4             | 1.6                      |
| 3                                                    | #5470.00        | 53.0 PK                 | 68.2           | -15.2       | 2.75 H             | 201                  | 51.4             | 1.6                      |
| 4                                                    | *5720.00        | 103.1 PK                |                |             | 2.75 H             | 201                  | 101.2            | 1.9                      |
| 5                                                    | *5720.00        | 93.8 AV                 |                |             | 2.75 H             | 201                  | 91.9             | 1.9                      |
| 6                                                    | #5850.00        | 52.0 PK                 | 68.2           | -16.2       | 2.75 H             | 201                  | 49.7             | 2.3                      |
| 7                                                    | 11450.00        | 48.9 PK                 | 74.0           | -25.1       | 2.27 H             | 96                   | 36.3             | 12.6                     |
| 8                                                    | 11450.00        | 36.7 AV                 | 54.0           | -17.3       | 2.27 H             | 96                   | 24.1             | 12.6                     |
| 9                                                    | #17175.00       | 47.0 PK                 | 68.2           | -21.2       | 1.31 H             | 88                   | 31.2             | 15.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 50.7 PK                 | 74.0           | -23.3       | 1.53 V             | 331                  | 49.1             | 1.6                      |
| 2                                                    | 5460.00         | 38.6 AV                 | 54.0           | -15.4       | 1.53 V             | 331                  | 37.0             | 1.6                      |
| 3                                                    | #5470.00        | 53.2 PK                 | 68.2           | -15.0       | 1.53 V             | 331                  | 51.6             | 1.6                      |
| 4                                                    | *5720.00        | 109.6 PK                |                |             | 1.53 V             | 331                  | 107.7            | 1.9                      |
| 5                                                    | *5720.00        | 99.2 AV                 |                |             | 1.53 V             | 331                  | 97.3             | 1.9                      |
| 6                                                    | #5850.00        | 51.9 PK                 | 68.2           | -16.3       | 1.53 V             | 331                  | 49.6             | 2.3                      |
| 7                                                    | 11450.00        | 47.4 PK                 | 74.0           | -26.6       | 1.20 V             | 125                  | 34.8             | 12.6                     |
| 8                                                    | 11450.00        | 36.9 AV                 | 54.0           | -17.1       | 1.20 V             | 125                  | 24.3             | 12.6                     |
| 9                                                    | #17175.00       | 46.6 PK                 | 68.2           | -21.6       | 2.09 V             | 52                   | 30.8             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5550.19        | 52.0 PK                 | 68.2           | -16.2       | 2.72 H             | 219                  | 50.3             | 1.7                      |
| 2                                                    | *5745.00        | 110.9 PK                |                |             | 2.72 H             | 219                  | 109.0            | 1.9                      |
| 3                                                    | *5745.00        | 102.8 AV                |                |             | 2.72 H             | 219                  | 100.9            | 1.9                      |
| 4                                                    | #5950.19        | 66.1 PK                 | 68.2           | -2.1        | 2.72 H             | 219                  | 63.6             | 2.5                      |
| 5                                                    | 11479.00        | 53.6 PK                 | 74.0           | -20.4       | 2.26 H             | 114                  | 41.1             | 12.5                     |
| 6                                                    | 11479.00        | 44.1 AV                 | 54.0           | -9.9        | 2.26 H             | 114                  | 31.6             | 12.5                     |
| 7                                                    | #17218.50       | 54.2 PK                 | 68.2           | -14.0       | 1.18 H             | 70                   | 38.4             | 15.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5583.05        | 53.9 PK                 | 68.2           | -14.3       | 1.35 V             | 340                  | 52.2             | 1.7                      |
| 2                                                  | *5745.00        | 116.9 PK                |                |             | 1.35 V             | 340                  | 115.0            | 1.9                      |
| 3                                                  | *5745.00        | 106.6 AV                |                |             | 1.35 V             | 340                  | 104.7            | 1.9                      |
| 4                                                  | #5956.56        | 66.4 PK                 | 68.2           | -1.8        | 1.35 V             | 340                  | 63.9             | 2.5                      |
| 5                                                  | 11479.00        | 55.4 PK                 | 74.0           | -18.6       | 1.14 V             | 75                   | 42.9             | 12.5                     |
| 6                                                  | 11479.00        | 45.1 AV                 | 54.0           | -8.9        | 1.14 V             | 75                   | 32.6             | 12.5                     |
| 7                                                  | #17218.50       | 58.7 PK                 | 68.2           | -9.5        | 2.00 V             | 96                   | 42.9             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5626.82        | 51.1 PK                 | 68.2           | -17.1       | 2.81 H             | 224                  | 49.4             | 1.7                      |
| 2                                                    | *5785.00        | 112.9 PK                |                |             | 2.81 H             | 224                  | 110.9            | 2.0                      |
| 3                                                    | *5785.00        | 105.2 AV                |                |             | 2.81 H             | 224                  | 103.2            | 2.0                      |
| 4                                                    | #6004.18        | 53.1 PK                 | 68.2           | -15.1       | 2.81 H             | 224                  | 50.5             | 2.6                      |
| 5                                                    | 11580.50        | 53.6 PK                 | 74.0           | -20.4       | 2.24 H             | 101                  | 40.8             | 12.8                     |
| 6                                                    | 11580.50        | 44.1 AV                 | 54.0           | -9.9        | 2.24 H             | 101                  | 31.3             | 12.8                     |
| 7                                                    | #17370.75       | 53.5 PK                 | 68.2           | -14.7       | 1.20 H             | 72                   | 36.5             | 17.0                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5571.58        | 60.9 PK                 | 68.2           | -7.3        | 1.36 V             | 341                  | 59.2             | 1.7                      |
| 2                                                  | *5785.00        | 118.1 PK                |                |             | 1.36 V             | 341                  | 116.1            | 2.0                      |
| 3                                                  | *5785.00        | 110.8 AV                |                |             | 1.36 V             | 341                  | 108.8            | 2.0                      |
| 4                                                  | #6004.10        | 56.8 PK                 | 68.2           | -11.4       | 1.36 V             | 341                  | 54.2             | 2.6                      |
| 5                                                  | 11580.50        | 55.0 PK                 | 74.0           | -19.0       | 1.14 V             | 72                   | 42.2             | 12.8                     |
| 6                                                  | 11580.50        | 45.1 AV                 | 54.0           | -8.9        | 1.14 V             | 72                   | 32.3             | 12.8                     |
| 7                                                  | #17370.75       | 58.4 PK                 | 68.2           | -9.8        | 2.00 V             | 107                  | 41.4             | 17.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5561.19        | 51.6 PK                 | 68.2           | -16.6       | 2.77 H             | 209                  | 49.9             | 1.7                      |
| 2                                                    | *5825.00        | 113.1 PK                |                |             | 2.77 H             | 209                  | 110.9            | 2.2                      |
| 3                                                    | *5825.00        | 105.7 AV                |                |             | 2.77 H             | 209                  | 103.5            | 2.2                      |
| 4                                                    | #6022.24        | 52.0 PK                 | 68.2           | -16.2       | 2.77 H             | 209                  | 49.5             | 2.5                      |
| 5                                                    | 11660.50        | 53.4 PK                 | 74.0           | -20.6       | 2.25 H             | 91                   | 40.5             | 12.9                     |
| 6                                                    | 11660.50        | 44.3 AV                 | 54.0           | -9.7        | 2.25 H             | 91                   | 31.4             | 12.9                     |
| 7                                                    | #17490.75       | 53.8 PK                 | 68.2           | -14.4       | 1.19 H             | 92                   | 34.8             | 19.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5569.63        | 52.4 PK                 | 68.2           | -15.8       | 1.38 V             | 343                  | 50.7             | 1.7                      |
| 2                                                    | *5825.00        | 118.3 PK                |                |             | 1.38 V             | 343                  | 116.1            | 2.2                      |
| 3                                                    | *5825.00        | 110.7 AV                |                |             | 1.38 V             | 343                  | 108.5            | 2.2                      |
| 4                                                    | #5988.82        | 55.7 PK                 | 68.2           | -12.5       | 1.38 V             | 343                  | 53.2             | 2.5                      |
| 5                                                    | 11660.50        | 54.8 PK                 | 74.0           | -19.2       | 1.10 V             | 75                   | 41.9             | 12.9                     |
| 6                                                    | 11660.50        | 44.9 AV                 | 54.0           | -9.1        | 1.10 V             | 75                   | 32.0             | 12.9                     |
| 7                                                    | #17490.75       | 59.3 PK                 | 68.2           | -8.9        | 2.02 V             | 82                   | 40.3             | 19.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

# Below 1GHz Data:


## 802.11ax (HE20)

|                 |                |                      |                 |
|-----------------|----------------|----------------------|-----------------|
| CHANNEL         | TX Channel 149 | DETECTOR<br>FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz    |                      |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 96.40          | 38.2 QP                       | 43.5              | -5.3           | 3.00 H                   | 360                        | 55.8                   | -17.6                          |
| 2                                                   | 155.90         | 37.1 QP                       | 43.5              | -6.4           | 1.88 H                   | 231                        | 49.6                   | -12.5                          |
| 3                                                   | 204.60         | 37.2 QP                       | 43.5              | -6.3           | 1.06 H                   | 246                        | 53.3                   | -16.1                          |
| 4                                                   | 291.00         | 41.6 QP                       | 46.0              | -4.4           | 1.08 H                   | 343                        | 53.8                   | -12.2                          |
| 5                                                   | 392.70         | 37.8 QP                       | 46.0              | -8.2           | 1.12 H                   | 131                        | 47.5                   | -9.7                           |
| 6                                                   | 681.80         | 38.1 QP                       | 46.0              | -7.9           | 1.19 H                   | 258                        | 41.9                   | -3.8                           |

### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

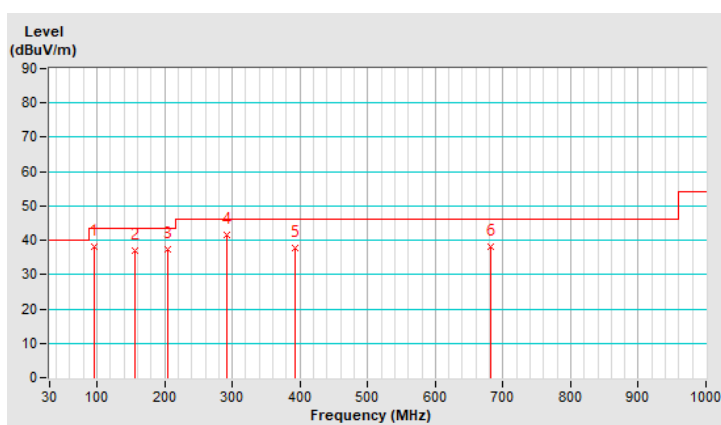


|                        |                |                              |                 |
|------------------------|----------------|------------------------------|-----------------|
| <b>CHANNEL</b>         | TX Channel 149 | <b>DETECTOR<br/>FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 9kHz ~ 1GHz    |                              |                 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 102.30         | 32.3 QP                       | 43.5              | -11.2          | 4.00 V                   | 95                         | 49.0                   | -16.7                          |
| 2                                                 | 163.40         | 30.0 QP                       | 43.5              | -13.5          | 1.98 V                   | 117                        | 42.6                   | -12.6                          |
| 3                                                 | 294.80         | 36.0 QP                       | 46.0              | -10.0          | 2.07 V                   | 258                        | 48.1                   | -12.1                          |
| 4                                                 | 432.10         | 31.8 QP                       | 46.0              | -14.2          | 1.10 V                   | 304                        | 40.3                   | -8.5                           |
| 5                                                 | 668.60         | 33.8 QP                       | 46.0              | -12.2          | 1.20 V                   | 351                        | 37.9                   | -4.1                           |
| 6                                                 | 707.00         | 34.2 QP                       | 46.0              | -11.8          | 1.94 V                   | 270                        | 37.7                   | -3.5                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

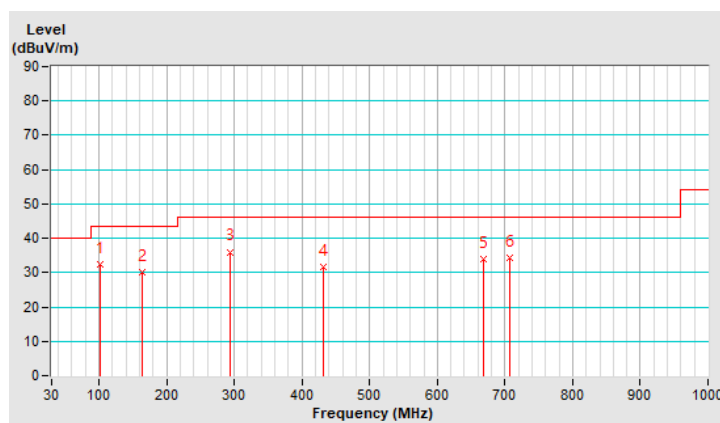

## PIFA Antenna

### Above 1GHz Data:

#### 802.11a

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 66.3 PK                 | 74.0           | -7.7        | 1.53 H             | 182                  | 64.6             | 1.7                      |
| 2                                                    | 5150.00         | 52.1 AV                 | 54.0           | -1.9        | 1.53 H             | 182                  | 50.4             | 1.7                      |
| 3                                                    | *5180.00        | 116.2 PK                |                |             | 1.53 H             | 182                  | 114.7            | 1.5                      |
| 4                                                    | *5180.00        | 107.4 AV                |                |             | 1.53 H             | 182                  | 105.9            | 1.5                      |
| 5                                                    | #10360.00       | 53.8 PK                 | 68.2           | -14.4       | 1.25 H             | 49                   | 42.6             | 11.2                     |
| 6                                                    | 15540.00        | 53.8 PK                 | 74.0           | -20.2       | 1.55 H             | 19                   | 42.1             | 11.7                     |
| 7                                                    | 15540.00        | 43.7 AV                 | 54.0           | -10.3       | 1.55 H             | 19                   | 32.0             | 11.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 64.9 PK                 | 74.0           | -9.1        | 3.59 V             | 265                  | 63.2             | 1.7                      |
| 2                                                  | 5150.00         | 47.3 AV                 | 54.0           | -6.7        | 3.59 V             | 265                  | 45.6             | 1.7                      |
| 3                                                  | *5180.00        | 113.0 PK                |                |             | 3.59 V             | 265                  | 111.5            | 1.5                      |
| 4                                                  | *5180.00        | 103.6 AV                |                |             | 3.59 V             | 265                  | 102.1            | 1.5                      |
| 5                                                  | #10360.00       | 52.0 PK                 | 68.2           | -16.2       | 2.15 V             | 90                   | 40.8             | 11.2                     |
| 6                                                  | 15540.00        | 54.2 PK                 | 74.0           | -19.8       | 3.65 V             | 95                   | 42.5             | 11.7                     |
| 7                                                  | 15540.00        | 43.4 AV                 | 54.0           | -10.6       | 3.65 V             | 95                   | 31.7             | 11.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.7 PK                 | 74.0           | -18.3       | 1.50 H             | 183                  | 54.0             | 1.7                      |
| 2                                                    | 5150.00         | 44.6 AV                 | 54.0           | -9.4        | 1.50 H             | 183                  | 42.9             | 1.7                      |
| 3                                                    | *5200.00        | 119.1 PK                |                |             | 1.50 H             | 183                  | 117.7            | 1.4                      |
| 4                                                    | *5200.00        | 109.9 AV                |                |             | 1.50 H             | 183                  | 108.5            | 1.4                      |
| 5                                                    | #10400.00       | 53.5 PK                 | 68.2           | -14.7       | 1.21 H             | 36                   | 42.0             | 11.5                     |
| 6                                                    | 15600.00        | 53.4 PK                 | 74.0           | -20.6       | 1.51 H             | 20                   | 41.9             | 11.5                     |
| 7                                                    | 15600.00        | 43.1 AV                 | 54.0           | -10.9       | 1.51 H             | 20                   | 31.6             | 11.5                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 52.7 PK                 | 74.0           | -21.3       | 3.58 V             | 272                  | 51.0             | 1.7                      |
| 2                                                  | 5150.00         | 41.7 AV                 | 54.0           | -12.3       | 3.58 V             | 272                  | 40.0             | 1.7                      |
| 3                                                  | *5200.00        | 115.0 PK                |                |             | 3.58 V             | 272                  | 113.6            | 1.4                      |
| 4                                                  | *5200.00        | 105.7 AV                |                |             | 3.58 V             | 272                  | 104.3            | 1.4                      |
| 5                                                  | #10400.00       | 52.6 PK                 | 68.2           | -15.6       | 2.15 V             | 60                   | 41.1             | 11.5                     |
| 6                                                  | 15600.00        | 53.8 PK                 | 74.0           | -20.2       | 3.59 V             | 77                   | 42.3             | 11.5                     |
| 7                                                  | 15600.00        | 43.3 AV                 | 54.0           | -10.7       | 3.59 V             | 77                   | 31.8             | 11.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 56.1 PK                 | 74.0           | -17.9       | 1.49 H             | 184                  | 54.4             | 1.7                      |
| 2                                                    | 5150.00         | 44.7 AV                 | 54.0           | -9.3        | 1.49 H             | 184                  | 43.0             | 1.7                      |
| 3                                                    | *5240.00        | 118.2 PK                |                |             | 1.49 H             | 184                  | 117.0            | 1.2                      |
| 4                                                    | *5240.00        | 109.3 AV                |                |             | 1.49 H             | 184                  | 108.1            | 1.2                      |
| 5                                                    | #10480.00       | 54.3 PK                 | 68.2           | -13.9       | 1.26 H             | 65                   | 42.8             | 11.5                     |
| 6                                                    | 15720.00        | 53.1 PK                 | 74.0           | -20.9       | 1.45 H             | 13                   | 42.0             | 11.1                     |
| 7                                                    | 15720.00        | 43.0 AV                 | 54.0           | -11.0       | 1.45 H             | 13                   | 31.9             | 11.1                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 52.9 PK                 | 74.0           | -21.1       | 3.61 V             | 262                  | 51.2             | 1.7                      |
| 2                                                  | 5150.00         | 42.2 AV                 | 54.0           | -11.8       | 3.61 V             | 262                  | 40.5             | 1.7                      |
| 3                                                  | *5240.00        | 114.8 PK                |                |             | 3.61 V             | 262                  | 113.6            | 1.2                      |
| 4                                                  | *5240.00        | 105.2 AV                |                |             | 3.61 V             | 262                  | 104.0            | 1.2                      |
| 5                                                  | #10480.00       | 52.3 PK                 | 68.2           | -15.9       | 2.20 V             | 82                   | 40.8             | 11.5                     |
| 6                                                  | 15720.00        | 53.5 PK                 | 74.0           | -20.5       | 3.62 V             | 74                   | 42.4             | 11.1                     |
| 7                                                  | 15720.00        | 43.1 AV                 | 54.0           | -10.9       | 3.62 V             | 74                   | 32.0             | 11.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 53.8 PK                 | 74.0           | -20.2       | 1.74 H             | 181                  | 52.1             | 1.7                      |
| 2                                                    | 5150.00         | 43.5 AV                 | 54.0           | -10.5       | 1.74 H             | 181                  | 41.8             | 1.7                      |
| 3                                                    | *5260.00        | 118.5 PK                |                |             | 1.74 H             | 181                  | 117.3            | 1.2                      |
| 4                                                    | *5260.00        | 109.5 AV                |                |             | 1.74 H             | 181                  | 108.3            | 1.2                      |
| 5                                                    | 5418.00         | 53.4 PK                 | 74.0           | -20.6       | 1.74 H             | 181                  | 51.9             | 1.5                      |
| 6                                                    | 5418.00         | 43.4 AV                 | 54.0           | -10.6       | 1.74 H             | 181                  | 41.9             | 1.5                      |
| 7                                                    | #10520.00       | 53.8 PK                 | 68.2           | -14.4       | 1.26 H             | 40                   | 42.4             | 11.4                     |
| 8                                                    | 15780.00        | 54.4 PK                 | 74.0           | -19.6       | 1.46 H             | 39                   | 43.7             | 10.7                     |
| 9                                                    | 15780.00        | 43.8 AV                 | 54.0           | -10.2       | 1.46 H             | 39                   | 33.1             | 10.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 53.4 PK                 | 74.0           | -20.6       | 3.62 V             | 274                  | 51.7             | 1.7                      |
| 2                                                  | 5150.00         | 42.7 AV                 | 54.0           | -11.3       | 3.62 V             | 274                  | 41.0             | 1.7                      |
| 3                                                  | *5260.00        | 115.3 PK                |                |             | 3.62 V             | 274                  | 114.1            | 1.2                      |
| 4                                                  | *5260.00        | 105.6 AV                |                |             | 3.62 V             | 274                  | 104.4            | 1.2                      |
| 5                                                  | 5350.00         | 53.6 PK                 | 74.0           | -20.4       | 3.62 V             | 274                  | 52.2             | 1.4                      |
| 6                                                  | 5350.00         | 42.9 AV                 | 54.0           | -11.1       | 3.62 V             | 274                  | 41.5             | 1.4                      |
| 7                                                  | #10520.00       | 52.5 PK                 | 68.2           | -15.7       | 2.25 V             | 67                   | 41.1             | 11.4                     |
| 8                                                  | 15780.00        | 54.1 PK                 | 74.0           | -19.9       | 3.63 V             | 93                   | 43.4             | 10.7                     |
| 9                                                  | 15780.00        | 43.3 AV                 | 54.0           | -10.7       | 3.63 V             | 93                   | 32.6             | 10.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>Channel</b>         | TX Channel 60 | <b>Detector Function</b> | Peak (PK)    |
| <b>Frequency Range</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 118.6 PK                |                |             | 1.71 H             | 187                  | 117.4            | 1.2                      |
| 2                                                    | *5300.00        | 109.4 AV                |                |             | 1.71 H             | 187                  | 108.2            | 1.2                      |
| 3                                                    | 5350.00         | 60.7 PK                 | 74.0           | -13.3       | 1.71 H             | 187                  | 59.3             | 1.4                      |
| 4                                                    | 5350.00         | 43.5 AV                 | 54.0           | -10.5       | 1.71 H             | 187                  | 42.1             | 1.4                      |
| 5                                                    | 10600.00        | 53.9 PK                 | 74.0           | -20.1       | 1.24 H             | 50                   | 42.1             | 11.8                     |
| 6                                                    | 10600.00        | 42.1 AV                 | 54.0           | -11.9       | 1.24 H             | 50                   | 30.3             | 11.8                     |
| 7                                                    | 15900.00        | 53.7 PK                 | 74.0           | -20.3       | 1.50 H             | 25                   | 43.0             | 10.7                     |
| 8                                                    | 15900.00        | 43.4 AV                 | 54.0           | -10.6       | 1.50 H             | 25                   | 32.7             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 114.8 PK                |                |             | 3.58 V             | 249                  | 113.6            | 1.2                      |
| 2                                                    | *5300.00        | 105.4 AV                |                |             | 3.58 V             | 249                  | 104.2            | 1.2                      |
| 3                                                    | 5350.00         | 53.4 PK                 | 74.0           | -20.6       | 3.58 V             | 249                  | 52.0             | 1.4                      |
| 4                                                    | 5350.00         | 42.7 AV                 | 54.0           | -11.3       | 3.58 V             | 249                  | 41.3             | 1.4                      |
| 5                                                    | 10600.00        | 52.2 PK                 | 74.0           | -21.8       | 2.19 V             | 74                   | 40.4             | 11.8                     |
| 6                                                    | 10600.00        | 41.4 AV                 | 54.0           | -12.6       | 2.19 V             | 74                   | 29.6             | 11.8                     |
| 7                                                    | 15900.00        | 53.7 PK                 | 74.0           | -20.3       | 3.59 V             | 88                   | 43.0             | 10.7                     |
| 8                                                    | 15900.00        | 43.0 AV                 | 54.0           | -11.0       | 3.59 V             | 88                   | 32.3             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>Channel</b>         | TX Channel 64 | <b>Detector Function</b> | Peak (PK)    |
| <b>Frequency Range</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 115.8 PK                |                |             | 1.75 H             | 183                  | 114.4            | 1.4                      |
| 2                                                    | *5320.00        | 108.6 AV                |                |             | 1.75 H             | 183                  | 107.2            | 1.4                      |
| 3                                                    | 5350.00         | 66.4 PK                 | 74.0           | -7.6        | 1.75 H             | 183                  | 65.0             | 1.4                      |
| 4                                                    | 5350.00         | 52.5 AV                 | 54.0           | -1.5        | 1.75 H             | 183                  | 51.1             | 1.4                      |
| 5                                                    | 10640.00        | 54.4 PK                 | 74.0           | -19.6       | 1.27 H             | 38                   | 42.5             | 11.9                     |
| 6                                                    | 10640.00        | 42.5 AV                 | 54.0           | -11.5       | 1.27 H             | 38                   | 30.6             | 11.9                     |
| 7                                                    | 15960.00        | 54.0 PK                 | 74.0           | -20.0       | 1.48 H             | 35                   | 43.1             | 10.9                     |
| 8                                                    | 15960.00        | 43.6 AV                 | 54.0           | -10.4       | 1.48 H             | 35                   | 32.7             | 10.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 112.2 PK                |                |             | 4.00 V             | 262                  | 110.8            | 1.4                      |
| 2                                                    | *5320.00        | 102.2 AV                |                |             | 4.00 V             | 262                  | 100.8            | 1.4                      |
| 3                                                    | 5350.00         | 61.5 PK                 | 74.0           | -12.5       | 4.00 V             | 262                  | 60.1             | 1.4                      |
| 4                                                    | 5350.00         | 47.1 AV                 | 54.0           | -6.9        | 4.00 V             | 262                  | 45.7             | 1.4                      |
| 5                                                    | 10640.00        | 52.6 PK                 | 74.0           | -21.4       | 2.18 V             | 90                   | 40.7             | 11.9                     |
| 6                                                    | 10640.00        | 41.8 AV                 | 54.0           | -12.2       | 2.18 V             | 90                   | 29.9             | 11.9                     |
| 7                                                    | 15960.00        | 53.6 PK                 | 74.0           | -20.4       | 3.65 V             | 88                   | 42.7             | 10.9                     |
| 8                                                    | 15960.00        | 42.7 AV                 | 54.0           | -11.3       | 3.65 V             | 88                   | 31.8             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 61.3 PK                 | 74.0           | -12.7       | 2.66 H             | 356                  | 59.7             | 1.6                      |
| 2                                                    | 5460.00         | 43.8 AV                 | 54.0           | -10.2       | 2.66 H             | 356                  | 42.2             | 1.6                      |
| 3                                                    | #5470.00        | 66.3 PK                 | 68.2           | -1.9        | 2.66 H             | 356                  | 64.7             | 1.6                      |
| 4                                                    | *5500.00        | 116.3 PK                |                |             | 2.66 H             | 356                  | 114.6            | 1.7                      |
| 5                                                    | *5500.00        | 106.8 AV                |                |             | 2.66 H             | 356                  | 105.1            | 1.7                      |
| 6                                                    | 11000.00        | 54.3 PK                 | 74.0           | -19.7       | 1.20 H             | 48                   | 42.1             | 12.2                     |
| 7                                                    | 11000.00        | 42.5 AV                 | 54.0           | -11.5       | 1.20 H             | 48                   | 30.3             | 12.2                     |
| 8                                                    | #16500.00       | 53.8 PK                 | 68.2           | -14.4       | 1.56 H             | 27                   | 40.4             | 13.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 54.5 PK                 | 74.0           | -19.5       | 3.95 V             | 263                  | 52.9             | 1.6                      |
| 2                                                    | 5460.00         | 40.3 AV                 | 54.0           | -13.7       | 3.95 V             | 263                  | 38.7             | 1.6                      |
| 3                                                    | #5470.00        | 60.1 PK                 | 68.2           | -8.1        | 3.95 V             | 263                  | 58.5             | 1.6                      |
| 4                                                    | *5500.00        | 109.8 PK                |                |             | 3.95 V             | 263                  | 108.1            | 1.7                      |
| 5                                                    | *5500.00        | 100.4 AV                |                |             | 3.95 V             | 263                  | 98.7             | 1.7                      |
| 6                                                    | 11000.00        | 52.4 PK                 | 74.0           | -21.6       | 2.23 V             | 64                   | 40.2             | 12.2                     |
| 7                                                    | 11000.00        | 41.5 AV                 | 54.0           | -12.5       | 2.23 V             | 64                   | 29.3             | 12.2                     |
| 8                                                    | #16500.00       | 53.6 PK                 | 68.2           | -14.6       | 3.65 V             | 83                   | 40.2             | 13.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 118.2 PK                |                |             | 2.40 H             | 4                    | 116.5            | 1.7                      |
| 2                                                    | *5580.00        | 109.1 AV                |                |             | 2.40 H             | 4                    | 107.4            | 1.7                      |
| 3                                                    | 11160.00        | 53.7 PK                 | 74.0           | -20.3       | 1.20 H             | 59                   | 42.1             | 11.6                     |
| 4                                                    | 11160.00        | 41.8 AV                 | 54.0           | -12.2       | 1.20 H             | 59                   | 30.2             | 11.6                     |
| 5                                                    | #16740.00       | 53.3 PK                 | 68.2           | -14.9       | 1.45 H             | 28                   | 38.6             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 112.0 PK                |                |             | 3.59 V             | 275                  | 110.3            | 1.7                      |
| 2                                                    | *5580.00        | 102.8 AV                |                |             | 3.59 V             | 275                  | 101.1            | 1.7                      |
| 3                                                    | 11160.00        | 52.9 PK                 | 74.0           | -21.1       | 2.18 V             | 70                   | 41.3             | 11.6                     |
| 4                                                    | 11160.00        | 41.9 AV                 | 54.0           | -12.1       | 2.18 V             | 70                   | 30.3             | 11.6                     |
| 5                                                    | #16740.00       | 53.0 PK                 | 68.2           | -15.2       | 3.58 V             | 74                   | 38.3             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 115.8 PK                |                |             | 2.70 H             | 340                  | 114.0            | 1.8                      |
| 2                                                    | *5700.00        | 106.5 AV                |                |             | 2.70 H             | 340                  | 104.7            | 1.8                      |
| 3                                                    | #5725.00        | 66.6 PK                 | 68.2           | -1.6        | 2.70 H             | 340                  | 64.7             | 1.9                      |
| 4                                                    | 11400.00        | 53.5 PK                 | 74.0           | -20.5       | 1.24 H             | 40                   | 40.7             | 12.8                     |
| 5                                                    | 11400.00        | 41.5 AV                 | 54.0           | -12.5       | 1.24 H             | 40                   | 28.7             | 12.8                     |
| 6                                                    | #17100.00       | 53.9 PK                 | 68.2           | -14.3       | 1.55 H             | 25                   | 37.6             | 16.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 108.2 PK                |                |             | 3.58 V             | 280                  | 106.4            | 1.8                      |
| 2                                                    | *5700.00        | 99.8 AV                 |                |             | 3.58 V             | 280                  | 98.0             | 1.8                      |
| 3                                                    | #5725.00        | 60.2 PK                 | 68.2           | -8.0        | 3.58 V             | 280                  | 58.3             | 1.9                      |
| 4                                                    | 11400.00        | 52.3 PK                 | 74.0           | -21.7       | 2.18 V             | 90                   | 39.5             | 12.8                     |
| 5                                                    | 11400.00        | 41.5 AV                 | 54.0           | -12.5       | 2.18 V             | 90                   | 28.7             | 12.8                     |
| 6                                                    | #17100.00       | 53.3 PK                 | 68.2           | -14.9       | 3.55 V             | 89                   | 37.0             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 53.0 PK                 | 74.0           | -21.0       | 2.63 H             | 168                  | 51.4             | 1.6                      |
| 2                                                    | 5460.00         | 42.8 AV                 | 54.0           | -11.2       | 2.63 H             | 168                  | 41.2             | 1.6                      |
| 3                                                    | #5470.00        | 52.4 PK                 | 68.2           | -15.8       | 2.63 H             | 168                  | 50.8             | 1.6                      |
| 4                                                    | *5720.00        | 119.8 PK                |                |             | 2.63 H             | 168                  | 117.9            | 1.9                      |
| 5                                                    | *5720.00        | 110.4 AV                |                |             | 2.63 H             | 168                  | 108.5            | 1.9                      |
| 6                                                    | #5850.00        | 55.5 PK                 | 68.2           | -12.7       | 2.63 H             | 168                  | 53.2             | 2.3                      |
| 7                                                    | 11440.00        | 54.2 PK                 | 74.0           | -19.8       | 1.22 H             | 61                   | 41.6             | 12.6                     |
| 8                                                    | 11440.00        | 42.3 AV                 | 54.0           | -11.7       | 1.22 H             | 61                   | 29.7             | 12.6                     |
| 9                                                    | #17160.00       | 53.5 PK                 | 68.2           | -14.7       | 1.55 H             | 22                   | 37.6             | 15.9                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5460.00         | 52.5 PK                 | 74.0           | -21.5       | 3.62 V             | 250                  | 50.9             | 1.6                      |
| 2                                                  | 5460.00         | 42.4 AV                 | 54.0           | -11.6       | 3.62 V             | 250                  | 40.8             | 1.6                      |
| 3                                                  | #5470.00        | 52.1 PK                 | 68.2           | -16.1       | 3.62 V             | 250                  | 50.5             | 1.6                      |
| 4                                                  | *5720.00        | 112.4 PK                |                |             | 3.62 V             | 250                  | 110.5            | 1.9                      |
| 5                                                  | *5720.00        | 103.2 AV                |                |             | 3.62 V             | 250                  | 101.3            | 1.9                      |
| 6                                                  | #5850.00        | 55.2 PK                 | 68.2           | -13.0       | 3.62 V             | 250                  | 52.9             | 2.3                      |
| 7                                                  | 11440.00        | 52.5 PK                 | 74.0           | -21.5       | 2.15 V             | 75                   | 39.9             | 12.6                     |
| 8                                                  | 11440.00        | 41.5 AV                 | 54.0           | -12.5       | 2.15 V             | 75                   | 28.9             | 12.6                     |
| 9                                                  | #17160.00       | 53.8 PK                 | 68.2           | -14.4       | 3.57 V             | 101                  | 37.9             | 15.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5745.00        | 119.2 PK                |                |             | 2.44 H             | 182                  | 117.3            | 1.9                      |
| 2                                                    | *5745.00        | 109.1 AV                |                |             | 2.44 H             | 182                  | 107.2            | 1.9                      |
| 3                                                    | 11490.00        | 53.6 PK                 | 74.0           | -20.4       | 1.23 H             | 51                   | 41.1             | 12.5                     |
| 4                                                    | 11490.00        | 41.9 AV                 | 54.0           | -12.1       | 1.23 H             | 51                   | 29.4             | 12.5                     |
| 5                                                    | #17235.00       | 54.3 PK                 | 68.2           | -13.9       | 1.54 H             | 39                   | 38.5             | 15.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5745.00        | 114.7 PK                |                |             | 1.11 V             | 53                   | 112.8            | 1.9                      |
| 2                                                    | *5745.00        | 104.6 AV                |                |             | 1.11 V             | 53                   | 102.7            | 1.9                      |
| 3                                                    | 11490.00        | 52.2 PK                 | 74.0           | -21.8       | 2.19 V             | 87                   | 39.7             | 12.5                     |
| 4                                                    | 11490.00        | 41.5 AV                 | 54.0           | -12.5       | 2.19 V             | 87                   | 29.0             | 12.5                     |
| 5                                                    | #17235.00       | 53.8 PK                 | 68.2           | -14.4       | 3.57 V             | 102                  | 38.0             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5785.00        | 119.6 PK                |                |             | 2.43 H             | 181                  | 117.6            | 2.0                      |
| 2                                                    | *5785.00        | 109.9 AV                |                |             | 2.43 H             | 181                  | 107.9            | 2.0                      |
| 3                                                    | 11570.00        | 53.7 PK                 | 74.0           | -20.3       | 1.23 H             | 63                   | 40.8             | 12.9                     |
| 4                                                    | 11570.00        | 41.9 AV                 | 54.0           | -12.1       | 1.23 H             | 63                   | 29.0             | 12.9                     |
| 5                                                    | #17355.00       | 53.2 PK                 | 68.2           | -15.0       | 1.50 H             | 14                   | 36.4             | 16.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5785.00        | 114.8 PK                |                |             | 1.12 V             | 55                   | 112.8            | 2.0                      |
| 2                                                    | *5785.00        | 104.6 AV                |                |             | 1.12 V             | 55                   | 102.6            | 2.0                      |
| 3                                                    | 11570.00        | 51.9 PK                 | 74.0           | -22.1       | 2.22 V             | 60                   | 39.0             | 12.9                     |
| 4                                                    | 11570.00        | 41.1 AV                 | 54.0           | -12.9       | 2.22 V             | 60                   | 28.2             | 12.9                     |
| 5                                                    | #17355.00       | 53.6 PK                 | 68.2           | -14.6       | 3.55 V             | 73                   | 36.8             | 16.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5825.00        | 120.1 PK                |                |             | 2.42 H             | 180                  | 117.9            | 2.2                      |
| 2                                                    | *5825.00        | 110.1 AV                |                |             | 2.42 H             | 180                  | 107.9            | 2.2                      |
| 3                                                    | 11650.00        | 54.3 PK                 | 74.0           | -19.7       | 1.26 H             | 47                   | 41.4             | 12.9                     |
| 4                                                    | 11650.00        | 42.4 AV                 | 54.0           | -11.6       | 1.26 H             | 47                   | 29.5             | 12.9                     |
| 5                                                    | #17475.00       | 54.0 PK                 | 68.2           | -14.2       | 1.51 H             | 22                   | 35.3             | 18.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5825.00        | 114.3 PK                |                |             | 1.15 V             | 56                   | 112.1            | 2.2                      |
| 2                                                    | *5825.00        | 104.3 AV                |                |             | 1.15 V             | 56                   | 102.1            | 2.2                      |
| 3                                                    | 11650.00        | 52.1 PK                 | 74.0           | -21.9       | 2.17 V             | 69                   | 39.2             | 12.9                     |
| 4                                                    | 11650.00        | 41.2 AV                 | 54.0           | -12.8       | 2.17 V             | 69                   | 28.3             | 12.9                     |
| 5                                                    | #17475.00       | 53.6 PK                 | 68.2           | -14.6       | 3.56 V             | 82                   | 34.9             | 18.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

### 802.11ax (HE20)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 63.5 PK                 | 74.0           | -10.5       | 1.63 H             | 182                  | 61.8             | 1.7                      |
| 2                                                    | 5150.00         | 52.5 AV                 | 54.0           | -1.5        | 1.63 H             | 182                  | 50.8             | 1.7                      |
| 3                                                    | *5180.00        | 115.5 PK                |                |             | 1.63 H             | 182                  | 114.0            | 1.5                      |
| 4                                                    | *5180.00        | 105.4 AV                |                |             | 1.63 H             | 182                  | 103.9            | 1.5                      |
| 5                                                    | #10360.00       | 54.0 PK                 | 68.2           | -14.2       | 1.31 H             | 38                   | 42.8             | 11.2                     |
| 6                                                    | 15540.00        | 54.4 PK                 | 74.0           | -19.6       | 1.55 H             | 15                   | 42.7             | 11.7                     |
| 7                                                    | 15540.00        | 41.6 AV                 | 54.0           | -12.4       | 1.55 H             | 15                   | 29.9             | 11.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 66.2 PK                 | 74.0           | -7.8        | 1.18 V             | 300                  | 64.5             | 1.7                      |
| 2                                                  | 5150.00         | 49.9 AV                 | 54.0           | -4.1        | 1.18 V             | 300                  | 48.2             | 1.7                      |
| 3                                                  | *5180.00        | 113.2 PK                |                |             | 1.18 V             | 300                  | 111.7            | 1.5                      |
| 4                                                  | *5180.00        | 101.9 AV                |                |             | 1.18 V             | 300                  | 100.4            | 1.5                      |
| 5                                                  | #10360.00       | 52.1 PK                 | 68.2           | -16.1       | 2.15 V             | 80                   | 40.9             | 11.2                     |
| 6                                                  | 15540.00        | 53.9 PK                 | 74.0           | -20.1       | 3.55 V             | 85                   | 42.2             | 11.7                     |
| 7                                                  | 15540.00        | 41.3 AV                 | 54.0           | -12.7       | 3.55 V             | 85                   | 29.6             | 11.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 56.0 PK                 | 74.0           | -18.0       | 1.68 H             | 175                  | 54.3             | 1.7                      |
| 2                                                    | 5150.00         | 44.4 AV                 | 54.0           | -9.6        | 1.68 H             | 175                  | 42.7             | 1.7                      |
| 3                                                    | *5200.00        | 119.4 PK                |                |             | 1.68 H             | 175                  | 118.0            | 1.4                      |
| 4                                                    | *5200.00        | 108.1 AV                |                |             | 1.68 H             | 175                  | 106.7            | 1.4                      |
| 5                                                    | #10400.00       | 53.9 PK                 | 68.2           | -14.3       | 1.29 H             | 39                   | 42.4             | 11.5                     |
| 6                                                    | 15600.00        | 54.1 PK                 | 74.0           | -19.9       | 1.55 H             | 17                   | 42.6             | 11.5                     |
| 7                                                    | 15600.00        | 41.1 AV                 | 54.0           | -12.9       | 1.55 H             | 17                   | 29.6             | 11.5                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 52.9 PK                 | 74.0           | -21.1       | 1.17 V             | 305                  | 51.2             | 1.7                      |
| 2                                                  | 5150.00         | 41.8 AV                 | 54.0           | -12.2       | 1.17 V             | 305                  | 40.1             | 1.7                      |
| 3                                                  | *5200.00        | 115.1 PK                |                |             | 1.17 V             | 305                  | 113.7            | 1.4                      |
| 4                                                  | *5200.00        | 105.5 AV                |                |             | 1.17 V             | 305                  | 104.1            | 1.4                      |
| 5                                                  | #10400.00       | 52.4 PK                 | 68.2           | -15.8       | 2.10 V             | 68                   | 40.9             | 11.5                     |
| 6                                                  | 15600.00        | 54.1 PK                 | 74.0           | -19.9       | 3.58 V             | 83                   | 42.6             | 11.5                     |
| 7                                                  | 15600.00        | 41.5 AV                 | 54.0           | -12.5       | 3.58 V             | 83                   | 30.0             | 11.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.8 PK                 | 74.0           | -18.2       | 1.68 H             | 167                  | 54.1             | 1.7                      |
| 2                                                    | 5150.00         | 44.6 AV                 | 54.0           | -9.4        | 1.68 H             | 167                  | 42.9             | 1.7                      |
| 3                                                    | *5240.00        | 118.3 PK                |                |             | 1.68 H             | 167                  | 117.1            | 1.2                      |
| 4                                                    | *5240.00        | 107.9 AV                |                |             | 1.68 H             | 167                  | 106.7            | 1.2                      |
| 5                                                    | #10480.00       | 54.5 PK                 | 68.2           | -13.7       | 1.26 H             | 38                   | 43.0             | 11.5                     |
| 6                                                    | 15720.00        | 55.0 PK                 | 74.0           | -19.0       | 1.54 H             | 30                   | 43.9             | 11.1                     |
| 7                                                    | 15720.00        | 41.9 AV                 | 54.0           | -12.1       | 1.54 H             | 30                   | 30.8             | 11.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 52.9 PK                 | 74.0           | -21.1       | 1.20 V             | 314                  | 51.2             | 1.7                      |
| 2                                                    | 5150.00         | 41.9 AV                 | 54.0           | -12.1       | 1.20 V             | 314                  | 40.2             | 1.7                      |
| 3                                                    | *5240.00        | 114.0 PK                |                |             | 1.20 V             | 314                  | 112.8            | 1.2                      |
| 4                                                    | *5240.00        | 104.7 AV                |                |             | 1.20 V             | 314                  | 103.5            | 1.2                      |
| 5                                                    | #10480.00       | 52.1 PK                 | 68.2           | -16.1       | 2.14 V             | 88                   | 40.6             | 11.5                     |
| 6                                                    | 15720.00        | 53.2 PK                 | 74.0           | -20.8       | 3.50 V             | 91                   | 42.1             | 11.1                     |
| 7                                                    | 15720.00        | 40.9 AV                 | 54.0           | -13.1       | 3.50 V             | 91                   | 29.8             | 11.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 53.9 PK                 | 74.0           | -20.1       | 1.59 H             | 189                  | 52.2             | 1.7                      |
| 2                                                    | 5150.00         | 43.3 AV                 | 54.0           | -10.7       | 1.59 H             | 189                  | 41.6             | 1.7                      |
| 3                                                    | *5260.00        | 118.2 PK                |                |             | 1.59 H             | 189                  | 117.0            | 1.2                      |
| 4                                                    | *5260.00        | 107.8 AV                |                |             | 1.59 H             | 189                  | 106.6            | 1.2                      |
| 5                                                    | 5350.00         | 53.2 PK                 | 74.0           | -20.8       | 1.59 H             | 189                  | 51.8             | 1.4                      |
| 6                                                    | 5350.00         | 43.4 AV                 | 54.0           | -10.6       | 1.59 H             | 189                  | 42.0             | 1.4                      |
| 7                                                    | #10520.00       | 54.8 PK                 | 68.2           | -13.4       | 1.37 H             | 24                   | 43.4             | 11.4                     |
| 8                                                    | 15780.00        | 54.1 PK                 | 74.0           | -19.9       | 1.59 H             | 27                   | 43.4             | 10.7                     |
| 9                                                    | 15780.00        | 41.5 AV                 | 54.0           | -12.5       | 1.59 H             | 27                   | 30.8             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.0 PK                 | 74.0           | -20.0       | 1.17 V             | 299                  | 52.3             | 1.7                      |
| 2                                                    | 5150.00         | 43.0 AV                 | 54.0           | -11.0       | 1.17 V             | 299                  | 41.3             | 1.7                      |
| 3                                                    | *5260.00        | 115.3 PK                |                |             | 1.17 V             | 299                  | 114.1            | 1.2                      |
| 4                                                    | *5260.00        | 105.7 AV                |                |             | 1.17 V             | 299                  | 104.5            | 1.2                      |
| 5                                                    | 5350.00         | 54.1 PK                 | 74.0           | -19.9       | 1.17 V             | 299                  | 52.7             | 1.4                      |
| 6                                                    | 5350.00         | 43.1 AV                 | 54.0           | -10.9       | 1.17 V             | 299                  | 41.7             | 1.4                      |
| 7                                                    | #10520.00       | 51.6 PK                 | 68.2           | -16.6       | 2.16 V             | 84                   | 40.2             | 11.4                     |
| 8                                                    | 15780.00        | 53.5 PK                 | 74.0           | -20.5       | 3.49 V             | 95                   | 42.8             | 10.7                     |
| 9                                                    | 15780.00        | 41.2 AV                 | 54.0           | -12.8       | 3.49 V             | 95                   | 30.5             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 60 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 118.4 PK                |                |             | 1.67 H             | 189                  | 117.2            | 1.2                      |
| 2                                                    | *5300.00        | 108.2 AV                |                |             | 1.67 H             | 189                  | 107.0            | 1.2                      |
| 3                                                    | 5350.00         | 65.3 PK                 | 74.0           | -8.7        | 1.67 H             | 189                  | 63.9             | 1.4                      |
| 4                                                    | 5350.00         | 44.6 AV                 | 54.0           | -9.4        | 1.67 H             | 189                  | 43.2             | 1.4                      |
| 5                                                    | 10600.00        | 53.7 PK                 | 74.0           | -20.3       | 1.31 H             | 26                   | 41.9             | 11.8                     |
| 6                                                    | 10600.00        | 40.3 AV                 | 54.0           | -13.7       | 1.31 H             | 26                   | 28.5             | 11.8                     |
| 7                                                    | 15900.00        | 54.0 PK                 | 74.0           | -20.0       | 1.51 H             | 17                   | 43.3             | 10.7                     |
| 8                                                    | 15900.00        | 41.4 AV                 | 54.0           | -12.6       | 1.51 H             | 17                   | 30.7             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 114.4 PK                |                |             | 1.17 V             | 301                  | 113.2            | 1.2                      |
| 2                                                    | *5300.00        | 104.8 AV                |                |             | 1.17 V             | 301                  | 103.6            | 1.2                      |
| 3                                                    | 5350.00         | 54.1 PK                 | 74.0           | -19.9       | 1.17 V             | 301                  | 52.7             | 1.4                      |
| 4                                                    | 5350.00         | 43.1 AV                 | 54.0           | -10.9       | 1.17 V             | 301                  | 41.7             | 1.4                      |
| 5                                                    | 10600.00        | 52.9 PK                 | 74.0           | -21.1       | 2.17 V             | 85                   | 41.1             | 11.8                     |
| 6                                                    | 10600.00        | 39.2 AV                 | 54.0           | -14.8       | 2.17 V             | 85                   | 27.4             | 11.8                     |
| 7                                                    | 15900.00        | 54.1 PK                 | 74.0           | -19.9       | 3.53 V             | 80                   | 43.4             | 10.7                     |
| 8                                                    | 15900.00        | 41.6 AV                 | 54.0           | -12.4       | 3.53 V             | 80                   | 30.9             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 64 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 116.4 PK                |                |             | 1.65 H             | 183                  | 115.0            | 1.4                      |
| 2                                                    | *5320.00        | 106.4 AV                |                |             | 1.65 H             | 183                  | 105.0            | 1.4                      |
| 3                                                    | 5350.00         | 65.0 PK                 | 74.0           | -9.0        | 1.65 H             | 183                  | 63.6             | 1.4                      |
| 4                                                    | 5350.00         | 52.5 AV                 | 54.0           | -1.5        | 1.65 H             | 183                  | 51.1             | 1.4                      |
| 5                                                    | 10640.00        | 53.9 PK                 | 74.0           | -20.1       | 1.34 H             | 47                   | 42.0             | 11.9                     |
| 6                                                    | 10640.00        | 40.5 AV                 | 54.0           | -13.5       | 1.34 H             | 47                   | 28.6             | 11.9                     |
| 7                                                    | 15960.00        | 54.2 PK                 | 74.0           | -19.8       | 1.55 H             | 25                   | 43.3             | 10.9                     |
| 8                                                    | 15960.00        | 41.4 AV                 | 54.0           | -12.6       | 1.55 H             | 25                   | 30.5             | 10.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 113.2 PK                |                |             | 1.19 V             | 302                  | 111.8            | 1.4                      |
| 2                                                    | *5320.00        | 102.3 AV                |                |             | 1.19 V             | 302                  | 100.9            | 1.4                      |
| 3                                                    | 5350.00         | 68.3 PK                 | 74.0           | -5.7        | 1.19 V             | 302                  | 66.9             | 1.4                      |
| 4                                                    | 5350.00         | 48.8 AV                 | 54.0           | -5.2        | 1.19 V             | 302                  | 47.4             | 1.4                      |
| 5                                                    | 10640.00        | 52.1 PK                 | 74.0           | -21.9       | 2.18 V             | 87                   | 40.2             | 11.9                     |
| 6                                                    | 10640.00        | 38.6 AV                 | 54.0           | -15.4       | 2.18 V             | 87                   | 26.7             | 11.9                     |
| 7                                                    | 15960.00        | 54.3 PK                 | 74.0           | -19.7       | 3.49 V             | 93                   | 43.4             | 10.9                     |
| 8                                                    | 15960.00        | 41.8 AV                 | 54.0           | -12.2       | 3.49 V             | 93                   | 30.9             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 60.0 PK                 | 74.0           | -14.0       | 1.62 H             | 181                  | 58.4             | 1.6                      |
| 2                                                    | 5460.00         | 44.3 AV                 | 54.0           | -9.7        | 1.62 H             | 181                  | 42.7             | 1.6                      |
| 3                                                    | #5470.00        | 66.1 PK                 | 68.2           | -2.1        | 1.62 H             | 181                  | 64.5             | 1.6                      |
| 4                                                    | *5500.00        | 114.6 PK                |                |             | 1.62 H             | 181                  | 112.9            | 1.7                      |
| 5                                                    | *5500.00        | 104.9 AV                |                |             | 1.62 H             | 181                  | 103.2            | 1.7                      |
| 6                                                    | 11000.00        | 54.0 PK                 | 74.0           | -20.0       | 1.30 H             | 32                   | 41.8             | 12.2                     |
| 7                                                    | 11000.00        | 40.3 AV                 | 54.0           | -13.7       | 1.30 H             | 32                   | 28.1             | 12.2                     |
| 8                                                    | #16500.00       | 54.0 PK                 | 68.2           | -14.2       | 1.49 H             | 16                   | 40.6             | 13.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5457.00         | 54.0 PK                 | 74.0           | -20.0       | 1.30 V             | 297                  | 52.4             | 1.6                      |
| 2                                                    | 5457.00         | 41.6 AV                 | 54.0           | -12.4       | 1.30 V             | 297                  | 40.0             | 1.6                      |
| 3                                                    | #5470.00        | 62.1 PK                 | 68.2           | -6.1        | 1.30 V             | 297                  | 60.5             | 1.6                      |
| 4                                                    | *5500.00        | 111.1 PK                |                |             | 1.30 V             | 297                  | 109.4            | 1.7                      |
| 5                                                    | *5500.00        | 99.8 AV                 |                |             | 1.30 V             | 297                  | 98.1             | 1.7                      |
| 6                                                    | 11000.00        | 52.8 PK                 | 74.0           | -21.2       | 2.17 V             | 85                   | 40.6             | 12.2                     |
| 7                                                    | 11000.00        | 39.2 AV                 | 54.0           | -14.8       | 2.17 V             | 85                   | 27.0             | 12.2                     |
| 8                                                    | #16500.00       | 54.0 PK                 | 68.2           | -14.2       | 3.60 V             | 94                   | 40.6             | 13.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 118.6 PK                |                |             | 2.66 H             | 15                   | 116.9            | 1.7                      |
| 2                                                    | *5580.00        | 107.4 AV                |                |             | 2.66 H             | 15                   | 105.7            | 1.7                      |
| 3                                                    | 11160.00        | 54.2 PK                 | 74.0           | -19.8       | 1.36 H             | 28                   | 42.6             | 11.6                     |
| 4                                                    | 11160.00        | 40.7 AV                 | 54.0           | -13.3       | 1.36 H             | 28                   | 29.1             | 11.6                     |
| 5                                                    | #16740.00       | 53.5 PK                 | 68.2           | -14.7       | 1.52 H             | 5                    | 38.8             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 112.3 PK                |                |             | 1.12 V             | 301                  | 110.6            | 1.7                      |
| 2                                                    | *5580.00        | 103.2 AV                |                |             | 1.12 V             | 301                  | 101.5            | 1.7                      |
| 3                                                    | 11160.00        | 51.5 PK                 | 74.0           | -22.5       | 2.17 V             | 79                   | 39.9             | 11.6                     |
| 4                                                    | 11160.00        | 38.5 AV                 | 54.0           | -15.5       | 2.17 V             | 79                   | 26.9             | 11.6                     |
| 5                                                    | #16740.00       | 53.9 PK                 | 68.2           | -14.3       | 3.59 V             | 91                   | 39.2             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                |                          |              |
|------------------------|----------------|--------------------------|--------------|
| <b>Channel</b>         | TX Channel 140 | <b>Detector Function</b> | Peak (PK)    |
| <b>Frequency Range</b> | 1GHz ~ 40GHz   |                          | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 113.8 PK                |                |             | 2.72 H             | 14                   | 112.0            | 1.8                      |
| 2                                                    | *5700.00        | 103.1 AV                |                |             | 2.72 H             | 14                   | 101.3            | 1.8                      |
| 3                                                    | #5725.00        | 66.7 PK                 | 68.2           | -1.5        | 2.72 H             | 14                   | 64.8             | 1.9                      |
| 4                                                    | 11400.00        | 54.5 PK                 | 74.0           | -19.5       | 1.36 H             | 45                   | 41.7             | 12.8                     |
| 5                                                    | 11400.00        | 40.9 AV                 | 54.0           | -13.1       | 1.36 H             | 45                   | 28.1             | 12.8                     |
| 6                                                    | #17100.00       | 54.0 PK                 | 68.2           | -14.2       | 1.55 H             | 20                   | 37.7             | 16.3                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5700.00        | 107.8 PK                |                |             | 1.14 V             | 285                  | 106.0            | 1.8                      |
| 2                                                  | *5700.00        | 99.5 AV                 |                |             | 1.14 V             | 285                  | 97.7             | 1.8                      |
| 3                                                  | #5725.00        | 60.3 PK                 | 68.2           | -7.9        | 1.14 V             | 285                  | 58.4             | 1.9                      |
| 4                                                  | 11400.00        | 51.7 PK                 | 74.0           | -22.3       | 2.20 V             | 78                   | 38.9             | 12.8                     |
| 5                                                  | 11400.00        | 38.3 AV                 | 54.0           | -15.7       | 2.20 V             | 78                   | 25.5             | 12.8                     |
| 6                                                  | #17100.00       | 54.0 PK                 | 68.2           | -14.2       | 3.58 V             | 96                   | 37.7             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 62.2 PK                 | 74.0           | -11.8       | 2.64 H             | 19                   | 60.6             | 1.6                      |
| 2                                                    | 5460.00         | 41.6 AV                 | 54.0           | -12.4       | 2.64 H             | 19                   | 40.0             | 1.6                      |
| 3                                                    | #5470.00        | 52.7 PK                 | 68.2           | -15.5       | 2.64 H             | 19                   | 51.1             | 1.6                      |
| 4                                                    | *5720.00        | 118.5 PK                |                |             | 2.64 H             | 19                   | 116.6            | 1.9                      |
| 5                                                    | *5720.00        | 107.7 AV                |                |             | 2.64 H             | 19                   | 105.8            | 1.9                      |
| 6                                                    | #5850.00        | 53.4 PK                 | 68.2           | -14.8       | 2.64 H             | 19                   | 51.1             | 2.3                      |
| 7                                                    | 11440.00        | 53.9 PK                 | 74.0           | -20.1       | 1.37 H             | 37                   | 41.3             | 12.6                     |
| 8                                                    | 11440.00        | 40.1 AV                 | 54.0           | -13.9       | 1.37 H             | 37                   | 27.5             | 12.6                     |
| 9                                                    | #17160.00       | 54.0 PK                 | 68.2           | -14.2       | 1.61 H             | 4                    | 38.1             | 15.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 59.6 PK                 | 74.0           | -14.4       | 1.17 V             | 296                  | 58.0             | 1.6                      |
| 2                                                    | 5460.00         | 39.8 AV                 | 54.0           | -14.2       | 1.17 V             | 296                  | 38.2             | 1.6                      |
| 3                                                    | #5470.00        | 52.6 PK                 | 68.2           | -15.6       | 1.17 V             | 296                  | 51.0             | 1.6                      |
| 4                                                    | *5720.00        | 112.4 PK                |                |             | 1.17 V             | 296                  | 110.5            | 1.9                      |
| 5                                                    | *5720.00        | 103.3 AV                |                |             | 1.17 V             | 296                  | 101.4            | 1.9                      |
| 6                                                    | #5850.00        | 52.7 PK                 | 68.2           | -15.5       | 1.17 V             | 296                  | 50.4             | 2.3                      |
| 7                                                    | 11440.00        | 52.0 PK                 | 74.0           | -22.0       | 2.19 V             | 73                   | 39.4             | 12.6                     |
| 8                                                    | 11440.00        | 38.7 AV                 | 54.0           | -15.3       | 2.19 V             | 73                   | 26.1             | 12.6                     |
| 9                                                    | #17160.00       | 54.2 PK                 | 68.2           | -14.0       | 3.53 V             | 89                   | 38.3             | 15.9                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5745.00        | 118.9 PK                |                |             | 1.50 H             | 180                  | 117.0            | 1.9                      |
| 2                                                    | *5745.00        | 108.5 AV                |                |             | 1.50 H             | 180                  | 106.6            | 1.9                      |
| 3                                                    | 11490.00        | 53.7 PK                 | 74.0           | -20.3       | 1.28 H             | 54                   | 41.2             | 12.5                     |
| 4                                                    | 11490.00        | 39.9 AV                 | 54.0           | -14.1       | 1.28 H             | 54                   | 27.4             | 12.5                     |
| 5                                                    | #17235.00       | 54.2 PK                 | 68.2           | -14.0       | 1.50 H             | 19                   | 38.4             | 15.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5745.00        | 113.5 PK                |                |             | 1.33 V             | 274                  | 111.6            | 1.9                      |
| 2                                                    | *5745.00        | 103.3 AV                |                |             | 1.33 V             | 274                  | 101.4            | 1.9                      |
| 3                                                    | 11490.00        | 52.6 PK                 | 74.0           | -21.4       | 2.16 V             | 72                   | 40.1             | 12.5                     |
| 4                                                    | 11490.00        | 39.2 AV                 | 54.0           | -14.8       | 2.16 V             | 72                   | 26.7             | 12.5                     |
| 5                                                    | #17235.00       | 53.8 PK                 | 68.2           | -14.4       | 3.54 V             | 69                   | 38.0             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5785.00        | 119.2 PK                |                |             | 1.51 H             | 181                  | 117.2            | 2.0                      |
| 2                                                    | *5785.00        | 108.8 AV                |                |             | 1.51 H             | 181                  | 106.8            | 2.0                      |
| 3                                                    | 11570.00        | 53.7 PK                 | 74.0           | -20.3       | 1.36 H             | 47                   | 40.8             | 12.9                     |
| 4                                                    | 11570.00        | 40.1 AV                 | 54.0           | -13.9       | 1.36 H             | 47                   | 27.2             | 12.9                     |
| 5                                                    | #17355.00       | 54.3 PK                 | 68.2           | -13.9       | 1.52 H             | 1                    | 37.5             | 16.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5785.00        | 113.2 PK                |                |             | 1.35 V             | 275                  | 111.2            | 2.0                      |
| 2                                                    | *5785.00        | 103.1 AV                |                |             | 1.35 V             | 275                  | 101.1            | 2.0                      |
| 3                                                    | 11570.00        | 51.7 PK                 | 74.0           | -22.3       | 2.20 V             | 65                   | 38.8             | 12.9                     |
| 4                                                    | 11570.00        | 38.5 AV                 | 54.0           | -15.5       | 2.20 V             | 65                   | 25.6             | 12.9                     |
| 5                                                    | #17355.00       | 53.8 PK                 | 68.2           | -14.4       | 3.52 V             | 91                   | 37.0             | 16.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5825.00        | 119.6 PK                |                |             | 1.49 H             | 178                  | 117.4            | 2.2                      |
| 2                                                    | *5825.00        | 109.1 AV                |                |             | 1.49 H             | 178                  | 106.9            | 2.2                      |
| 3                                                    | 11650.00        | 54.4 PK                 | 74.0           | -19.6       | 1.25 H             | 32                   | 41.5             | 12.9                     |
| 4                                                    | 11650.00        | 40.8 AV                 | 54.0           | -13.2       | 1.25 H             | 32                   | 27.9             | 12.9                     |
| 5                                                    | #17475.00       | 54.1 PK                 | 68.2           | -14.1       | 1.53 H             | 27                   | 35.4             | 18.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5825.00        | 113.8 PK                |                |             | 1.34 V             | 274                  | 111.6            | 2.2                      |
| 2                                                    | *5825.00        | 103.4 AV                |                |             | 1.34 V             | 274                  | 101.2            | 2.2                      |
| 3                                                    | 11650.00        | 52.3 PK                 | 74.0           | -21.7       | 2.13 V             | 84                   | 39.4             | 12.9                     |
| 4                                                    | 11650.00        | 39.0 AV                 | 54.0           | -15.0       | 2.13 V             | 84                   | 26.1             | 12.9                     |
| 5                                                    | #17475.00       | 53.8 PK                 | 68.2           | -14.4       | 3.57 V             | 97                   | 35.1             | 18.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



# 802.11ax (HE40)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 38 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 65.7 PK                 | 74.0           | -8.3        | 1.50 H             | 178                  | 64.0             | 1.7                      |
| 2                                                    | 5150.00         | 52.5 AV                 | 54.0           | -1.5        | 1.50 H             | 178                  | 50.8             | 1.7                      |
| 3                                                    | *5190.00        | 110.6 PK                |                |             | 1.50 H             | 178                  | 109.1            | 1.5                      |
| 4                                                    | *5190.00        | 100.5 AV                |                |             | 1.50 H             | 178                  | 99.0             | 1.5                      |
| 5                                                    | #10380.00       | 54.4 PK                 | 68.2           | -13.8       | 1.37 H             | 37                   | 43.1             | 11.3                     |
| 6                                                    | 15570.00        | 54.4 PK                 | 74.0           | -19.6       | 1.51 H             | 9                    | 42.8             | 11.6                     |
| 7                                                    | 15570.00        | 41.8 AV                 | 54.0           | -12.2       | 1.51 H             | 9                    | 30.2             | 11.6                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 65.7 PK                 | 74.0           | -8.3        | 1.23 V             | 297                  | 64.0             | 1.7                      |
| 2                                                  | 5150.00         | 48.7 AV                 | 54.0           | -5.3        | 1.23 V             | 297                  | 47.0             | 1.7                      |
| 3                                                  | *5190.00        | 106.8 PK                |                |             | 1.23 V             | 297                  | 105.3            | 1.5                      |
| 4                                                  | *5190.00        | 96.4 AV                 |                |             | 1.23 V             | 297                  | 94.9             | 1.5                      |
| 5                                                  | #10380.00       | 51.9 PK                 | 68.2           | -16.3       | 2.15 V             | 68                   | 40.6             | 11.3                     |
| 6                                                  | 15570.00        | 54.6 PK                 | 74.0           | -19.4       | 3.58 V             | 82                   | 43.0             | 11.6                     |
| 7                                                  | 15570.00        | 41.6 AV                 | 54.0           | -12.4       | 3.58 V             | 82                   | 30.0             | 11.6                     |

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 46 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 61.1 PK                 | 74.0           | -12.9       | 1.48 H             | 176                  | 59.4             | 1.7                      |
| 2                                                    | 5150.00         | 44.8 AV                 | 54.0           | -9.2        | 1.48 H             | 176                  | 43.1             | 1.7                      |
| 3                                                    | *5230.00        | 114.6 PK                |                |             | 1.48 H             | 176                  | 113.3            | 1.3                      |
| 4                                                    | *5230.00        | 104.1 AV                |                |             | 1.48 H             | 176                  | 102.8            | 1.3                      |
| 5                                                    | 5350.00         | 53.1 PK                 | 74.0           | -20.9       | 1.48 H             | 176                  | 51.7             | 1.4                      |
| 6                                                    | 5350.00         | 41.9 AV                 | 54.0           | -12.1       | 1.48 H             | 176                  | 40.5             | 1.4                      |
| 7                                                    | #10460.00       | 54.3 PK                 | 68.2           | -13.9       | 1.29 H             | 44                   | 43.0             | 11.3                     |
| 8                                                    | 15690.00        | 54.1 PK                 | 74.0           | -19.9       | 1.55 H             | 11                   | 42.9             | 11.2                     |
| 9                                                    | 15690.00        | 41.3 AV                 | 54.0           | -12.7       | 1.55 H             | 11                   | 30.1             | 11.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 57.6 PK                 | 74.0           | -16.4       | 1.25 V             | 298                  | 55.9             | 1.7                      |
| 2                                                    | 5150.00         | 40.6 AV                 | 54.0           | -13.4       | 1.25 V             | 298                  | 38.9             | 1.7                      |
| 3                                                    | *5230.00        | 110.3 PK                |                |             | 1.25 V             | 298                  | 109.0            | 1.3                      |
| 4                                                    | *5230.00        | 100.1 AV                |                |             | 1.25 V             | 298                  | 98.8             | 1.3                      |
| 5                                                    | 5350.00         | 52.1 PK                 | 74.0           | -21.9       | 1.25 V             | 298                  | 50.7             | 1.4                      |
| 6                                                    | 5350.00         | 39.3 AV                 | 54.0           | -14.7       | 1.25 V             | 298                  | 37.9             | 1.4                      |
| 7                                                    | #10460.00       | 51.3 PK                 | 68.2           | -16.9       | 2.19 V             | 84                   | 40.0             | 11.3                     |
| 8                                                    | 15690.00        | 54.1 PK                 | 74.0           | -19.9       | 3.52 V             | 78                   | 42.9             | 11.2                     |
| 9                                                    | 15690.00        | 41.3 AV                 | 54.0           | -12.7       | 3.52 V             | 78                   | 30.1             | 11.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 54 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 52.9 PK                 | 74.0           | -21.1       | 1.49 H             | 177                  | 51.2             | 1.7                      |
| 2                                                    | 5150.00         | 42.3 AV                 | 54.0           | -11.7       | 1.49 H             | 177                  | 40.6             | 1.7                      |
| 3                                                    | *5270.00        | 114.9 PK                |                |             | 1.49 H             | 177                  | 113.7            | 1.2                      |
| 4                                                    | *5270.00        | 104.6 AV                |                |             | 1.49 H             | 177                  | 103.4            | 1.2                      |
| 5                                                    | 5350.00         | 60.6 PK                 | 74.0           | -13.4       | 1.49 H             | 177                  | 59.2             | 1.4                      |
| 6                                                    | 5350.00         | 45.4 AV                 | 54.0           | -8.6        | 1.49 H             | 177                  | 44.0             | 1.4                      |
| 7                                                    | #10540.00       | 54.1 PK                 | 68.2           | -14.1       | 1.29 H             | 30                   | 42.6             | 11.5                     |
| 8                                                    | 15810.00        | 54.4 PK                 | 74.0           | -19.6       | 1.59 H             | 7                    | 43.8             | 10.6                     |
| 9                                                    | 15810.00        | 41.8 AV                 | 54.0           | -12.2       | 1.59 H             | 7                    | 31.2             | 10.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 52.8 PK                 | 74.0           | -21.2       | 1.29 V             | 311                  | 51.1             | 1.7                      |
| 2                                                    | 5150.00         | 40.6 AV                 | 54.0           | -13.4       | 1.29 V             | 311                  | 38.9             | 1.7                      |
| 3                                                    | *5270.00        | 110.1 PK                |                |             | 1.29 V             | 311                  | 108.9            | 1.2                      |
| 4                                                    | *5270.00        | 99.8 AV                 |                |             | 1.29 V             | 311                  | 98.6             | 1.2                      |
| 5                                                    | 5350.00         | 58.6 PK                 | 74.0           | -15.4       | 1.29 V             | 311                  | 57.2             | 1.4                      |
| 6                                                    | 5350.00         | 41.6 AV                 | 54.0           | -12.4       | 1.29 V             | 311                  | 40.2             | 1.4                      |
| 7                                                    | #10540.00       | 51.9 PK                 | 68.2           | -16.3       | 2.25 V             | 61                   | 40.4             | 11.5                     |
| 8                                                    | 15810.00        | 53.8 PK                 | 74.0           | -20.2       | 3.48 V             | 104                  | 43.2             | 10.6                     |
| 9                                                    | 15810.00        | 41.1 AV                 | 54.0           | -12.9       | 3.48 V             | 104                  | 30.5             | 10.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 62 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5310.00        | 112.1 PK                |                |             | 1.48 H             | 174                  | 110.8            | 1.3                      |
| 2                                                    | *5310.00        | 100.6 AV                |                |             | 1.48 H             | 174                  | 99.3             | 1.3                      |
| 3                                                    | 5350.00         | 69.7 PK                 | 74.0           | -4.3        | 1.48 H             | 174                  | 68.3             | 1.4                      |
| 4                                                    | 5350.00         | 52.5 AV                 | 54.0           | -1.5        | 1.48 H             | 174                  | 51.1             | 1.4                      |
| 5                                                    | 10620.00        | 53.9 PK                 | 74.0           | -20.1       | 1.27 H             | 30                   | 42.1             | 11.8                     |
| 6                                                    | 10620.00        | 40.2 AV                 | 54.0           | -13.8       | 1.27 H             | 30                   | 28.4             | 11.8                     |
| 7                                                    | 15930.00        | 54.0 PK                 | 74.0           | -20.0       | 1.51 H             | 26                   | 43.2             | 10.8                     |
| 8                                                    | 15930.00        | 41.1 AV                 | 54.0           | -12.9       | 1.51 H             | 26                   | 30.3             | 10.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5310.00        | 106.5 PK                |                |             | 1.12 V             | 301                  | 105.2            | 1.3                      |
| 2                                                    | *5310.00        | 96.2 AV                 |                |             | 1.12 V             | 301                  | 94.9             | 1.3                      |
| 3                                                    | 5350.00         | 61.6 PK                 | 74.0           | -12.4       | 1.12 V             | 301                  | 60.2             | 1.4                      |
| 4                                                    | 5350.00         | 48.5 AV                 | 54.0           | -5.5        | 1.12 V             | 301                  | 47.1             | 1.4                      |
| 5                                                    | 10620.00        | 52.5 PK                 | 74.0           | -21.5       | 2.20 V             | 71                   | 40.7             | 11.8                     |
| 6                                                    | 10620.00        | 39.4 AV                 | 54.0           | -14.6       | 2.20 V             | 71                   | 27.6             | 11.8                     |
| 7                                                    | 15930.00        | 54.4 PK                 | 74.0           | -19.6       | 3.50 V             | 104                  | 43.6             | 10.8                     |
| 8                                                    | 15930.00        | 41.9 AV                 | 54.0           | -12.1       | 3.50 V             | 104                  | 31.1             | 10.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                        |                |                          |              |
|------------------------|----------------|--------------------------|--------------|
| <b>Channel</b>         | TX Channel 102 | <b>Detector Function</b> | Peak (PK)    |
| <b>Frequency Range</b> | 1GHz ~ 40GHz   |                          | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5459.00         | 61.4 PK                 | 74.0           | -12.6       | 1.52 H             | 181                  | 59.8             | 1.6                      |
| 2                                                    | 5459.00         | 45.9 AV                 | 54.0           | -8.1        | 1.52 H             | 181                  | 44.3             | 1.6                      |
| 3                                                    | #5467.64        | 66.7 PK                 | 68.2           | -1.5        | 1.52 H             | 181                  | 65.1             | 1.6                      |
| 4                                                    | *5510.00        | 108.9 PK                |                |             | 1.52 H             | 181                  | 107.2            | 1.7                      |
| 5                                                    | *5510.00        | 99.4 AV                 |                |             | 1.52 H             | 181                  | 97.7             | 1.7                      |
| 6                                                    | 11020.00        | 53.6 PK                 | 74.0           | -20.4       | 1.34 H             | 61                   | 41.5             | 12.1                     |
| 7                                                    | 11020.00        | 40.2 AV                 | 54.0           | -13.8       | 1.34 H             | 61                   | 28.1             | 12.1                     |
| 8                                                    | #16530.00       | 54.0 PK                 | 68.2           | -14.2       | 1.63 H             | 7                    | 40.4             | 13.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 53.9 PK                 | 74.0           | -20.1       | 1.40 V             | 275                  | 52.3             | 1.6                      |
| 2                                                    | 5460.00         | 42.2 AV                 | 54.0           | -11.8       | 1.40 V             | 275                  | 40.6             | 1.6                      |
| 3                                                    | #5464.00        | 60.9 PK                 | 68.2           | -7.3        | 1.40 V             | 275                  | 59.3             | 1.6                      |
| 4                                                    | *5510.00        | 102.7 PK                |                |             | 1.40 V             | 275                  | 101.0            | 1.7                      |
| 5                                                    | *5510.00        | 92.1 AV                 |                |             | 1.40 V             | 275                  | 90.4             | 1.7                      |
| 6                                                    | 11020.00        | 52.5 PK                 | 74.0           | -21.5       | 2.21 V             | 69                   | 40.4             | 12.1                     |
| 7                                                    | 11020.00        | 39.1 AV                 | 54.0           | -14.9       | 2.21 V             | 69                   | 27.0             | 12.1                     |
| 8                                                    | #16530.00       | 54.4 PK                 | 68.2           | -13.8       | 3.48 V             | 90                   | 40.8             | 13.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 110 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5550.00        | 115.8 PK                |                |             | 1.47 H             | 175                  | 114.1            | 1.7                      |
| 2                                                    | *5550.00        | 104.9 AV                |                |             | 1.47 H             | 175                  | 103.2            | 1.7                      |
| 3                                                    | 11100.00        | 53.7 PK                 | 74.0           | -20.3       | 1.31 H             | 49                   | 42.1             | 11.6                     |
| 4                                                    | 11100.00        | 40.3 AV                 | 54.0           | -13.7       | 1.31 H             | 49                   | 28.7             | 11.6                     |
| 5                                                    | #16650.00       | 54.3 PK                 | 68.2           | -13.9       | 1.58 H             | 13                   | 39.8             | 14.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5550.00        | 109.9 PK                |                |             | 1.29 V             | 295                  | 108.2            | 1.7                      |
| 2                                                    | *5550.00        | 100.0 AV                |                |             | 1.29 V             | 295                  | 98.3             | 1.7                      |
| 3                                                    | 11100.00        | 51.7 PK                 | 74.0           | -22.3       | 2.21 V             | 67                   | 40.1             | 11.6                     |
| 4                                                    | 11100.00        | 38.6 AV                 | 54.0           | -15.4       | 2.21 V             | 67                   | 27.0             | 11.6                     |
| 5                                                    | #16650.00       | 54.0 PK                 | 68.2           | -14.2       | 3.54 V             | 77                   | 39.5             | 14.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 134 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5670.00        | 112.5 PK                |                |             | 1.53 H             | 180                  | 110.7            | 1.8                      |
| 2                                                    | *5670.00        | 102.0 AV                |                |             | 1.53 H             | 180                  | 100.2            | 1.8                      |
| 3                                                    | #5725.00        | 66.4 PK                 | 68.2           | -1.8        | 1.53 H             | 180                  | 64.5             | 1.9                      |
| 4                                                    | 11340.00        | 53.2 PK                 | 74.0           | -20.8       | 1.27 H             | 40                   | 40.7             | 12.5                     |
| 5                                                    | 11340.00        | 39.8 AV                 | 54.0           | -14.2       | 1.27 H             | 40                   | 27.3             | 12.5                     |
| 6                                                    | #17010.00       | 54.8 PK                 | 68.2           | -13.4       | 1.52 H             | 5                    | 38.6             | 16.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5670.00        | 106.8 PK                |                |             | 1.31 V             | 310                  | 105.0            | 1.8                      |
| 2                                                    | *5670.00        | 97.0 AV                 |                |             | 1.31 V             | 310                  | 95.2             | 1.8                      |
| 3                                                    | #5725.00        | 60.1 PK                 | 68.2           | -8.1        | 1.31 V             | 310                  | 58.2             | 1.9                      |
| 4                                                    | 11340.00        | 51.6 PK                 | 74.0           | -22.4       | 2.25 V             | 76                   | 39.1             | 12.5                     |
| 5                                                    | 11340.00        | 38.5 AV                 | 54.0           | -15.5       | 2.25 V             | 76                   | 26.0             | 12.5                     |
| 6                                                    | #17010.00       | 54.6 PK                 | 68.2           | -13.6       | 3.57 V             | 74                   | 38.4             | 16.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 142 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 53.6 PK                 | 74.0           | -20.4       | 1.55 H             | 176                  | 52.0             | 1.6                      |
| 2                                                    | 5460.00         | 42.7 AV                 | 54.0           | -11.3       | 1.55 H             | 176                  | 41.1             | 1.6                      |
| 3                                                    | #5470.00        | 54.9 PK                 | 68.2           | -13.3       | 1.55 H             | 176                  | 53.3             | 1.6                      |
| 4                                                    | *5710.00        | 115.3 PK                |                |             | 1.55 H             | 176                  | 113.5            | 1.8                      |
| 5                                                    | *5710.00        | 104.6 AV                |                |             | 1.55 H             | 176                  | 102.8            | 1.8                      |
| 6                                                    | #5850.00        | 54.1 PK                 | 68.2           | -14.1       | 1.55 H             | 176                  | 51.8             | 2.3                      |
| 7                                                    | 11420.00        | 53.8 PK                 | 74.0           | -20.2       | 1.33 H             | 50                   | 41.1             | 12.7                     |
| 8                                                    | 11420.00        | 40.5 AV                 | 54.0           | -13.5       | 1.33 H             | 50                   | 27.8             | 12.7                     |
| 9                                                    | #17130.00       | 54.6 PK                 | 68.2           | -13.6       | 1.59 H             | 8                    | 38.5             | 16.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 53.3 PK                 | 74.0           | -20.7       | 1.25 V             | 313                  | 51.7             | 1.6                      |
| 2                                                    | 5460.00         | 41.6 AV                 | 54.0           | -12.4       | 1.25 V             | 313                  | 40.0             | 1.6                      |
| 3                                                    | #5470.00        | 54.4 PK                 | 68.2           | -13.8       | 1.25 V             | 313                  | 52.8             | 1.6                      |
| 4                                                    | *5710.00        | 110.3 PK                |                |             | 1.25 V             | 313                  | 108.5            | 1.8                      |
| 5                                                    | *5710.00        | 99.9 AV                 |                |             | 1.25 V             | 313                  | 98.1             | 1.8                      |
| 6                                                    | #5850.00        | 53.7 PK                 | 68.2           | -14.5       | 1.25 V             | 313                  | 51.4             | 2.3                      |
| 7                                                    | 11420.00        | 52.0 PK                 | 74.0           | -22.0       | 2.17 V             | 75                   | 39.3             | 12.7                     |
| 8                                                    | 11420.00        | 38.5 AV                 | 54.0           | -15.5       | 2.17 V             | 75                   | 25.8             | 12.7                     |
| 9                                                    | #17130.00       | 53.6 PK                 | 68.2           | -14.6       | 3.54 V             | 104                  | 37.5             | 16.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 151 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5755.00        | 116.8 PK                |                |             | 1.50 H             | 174                  | 114.9            | 1.9                      |
| 2                                                    | *5755.00        | 107.0 AV                |                |             | 1.50 H             | 174                  | 105.1            | 1.9                      |
| 3                                                    | 11510.00        | 53.9 PK                 | 74.0           | -20.1       | 1.35 H             | 52                   | 41.4             | 12.5                     |
| 4                                                    | 11510.00        | 40.5 AV                 | 54.0           | -13.5       | 1.35 H             | 52                   | 28.0             | 12.5                     |
| 5                                                    | #17265.00       | 54.3 PK                 | 68.2           | -13.9       | 1.57 H             | 13                   | 38.3             | 16.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5755.00        | 111.8 PK                |                |             | 1.43 V             | 275                  | 109.9            | 1.9                      |
| 2                                                    | *5755.00        | 101.5 AV                |                |             | 1.43 V             | 275                  | 99.6             | 1.9                      |
| 3                                                    | 11510.00        | 51.8 PK                 | 74.0           | -22.2       | 2.18 V             | 68                   | 39.3             | 12.5                     |
| 4                                                    | 11510.00        | 38.4 AV                 | 54.0           | -15.6       | 2.18 V             | 68                   | 25.9             | 12.5                     |
| 5                                                    | #17265.00       | 54.2 PK                 | 68.2           | -14.0       | 3.52 V             | 89                   | 38.2             | 16.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 159 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5795.00        | 117.4 PK                |                |             | 1.45 H             | 171                  | 115.3            | 2.1                      |
| 2                                                    | *5795.00        | 107.2 AV                |                |             | 1.45 H             | 171                  | 105.1            | 2.1                      |
| 3                                                    | 11590.00        | 53.8 PK                 | 74.0           | -20.2       | 1.28 H             | 48                   | 41.0             | 12.8                     |
| 4                                                    | 11590.00        | 40.3 AV                 | 54.0           | -13.7       | 1.28 H             | 48                   | 27.5             | 12.8                     |
| 5                                                    | #17385.00       | 54.0 PK                 | 68.2           | -14.2       | 1.54 H             | 7                    | 36.7             | 17.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5795.00        | 112.2 PK                |                |             | 1.35 V             | 274                  | 110.1            | 2.1                      |
| 2                                                    | *5795.00        | 101.7 AV                |                |             | 1.35 V             | 274                  | 99.6             | 2.1                      |
| 3                                                    | 11590.00        | 52.7 PK                 | 74.0           | -21.3       | 2.18 V             | 86                   | 39.9             | 12.8                     |
| 4                                                    | 11590.00        | 39.1 AV                 | 54.0           | -14.9       | 2.18 V             | 86                   | 26.3             | 12.8                     |
| 5                                                    | #17385.00       | 54.1 PK                 | 68.2           | -14.1       | 3.56 V             | 105                  | 36.8             | 17.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

### 802.11ax (HE80)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 42 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5145.38         | 64.7 PK                 | 74.0           | -9.3        | 1.36 H             | 167                  | 63.0             | 1.7                      |
| 2                                                    | 5145.38         | 52.1 AV                 | 54.0           | -1.9        | 1.36 H             | 167                  | 50.4             | 1.7                      |
| 3                                                    | *5210.00        | 106.7 PK                |                |             | 1.36 H             | 167                  | 105.3            | 1.4                      |
| 4                                                    | *5210.00        | 96.5 AV                 |                |             | 1.36 H             | 167                  | 95.1             | 1.4                      |
| 5                                                    | 5350.00         | 51.3 PK                 | 74.0           | -22.7       | 1.36 H             | 167                  | 49.9             | 1.4                      |
| 6                                                    | 5350.00         | 41.7 AV                 | 54.0           | -12.3       | 1.36 H             | 167                  | 40.3             | 1.4                      |
| 7                                                    | #10420.00       | 53.5 PK                 | 68.2           | -14.7       | 1.26 H             | 26                   | 42.1             | 11.4                     |
| 8                                                    | 15630.00        | 54.8 PK                 | 74.0           | -19.2       | 1.60 H             | 26                   | 43.4             | 11.4                     |
| 9                                                    | 15630.00        | 42.0 AV                 | 54.0           | -12.0       | 1.60 H             | 26                   | 30.6             | 11.4                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5146.92         | 63.8 PK                 | 74.0           | -10.2       | 1.38 V             | 274                  | 62.1             | 1.7                      |
| 2                                                  | 5146.92         | 47.5 AV                 | 54.0           | -6.5        | 1.38 V             | 274                  | 45.8             | 1.7                      |
| 3                                                  | *5210.00        | 101.6 PK                |                |             | 1.38 V             | 274                  | 100.2            | 1.4                      |
| 4                                                  | *5210.00        | 91.7 AV                 |                |             | 1.38 V             | 274                  | 90.3             | 1.4                      |
| 5                                                  | 5412.84         | 51.2 PK                 | 74.0           | -22.8       | 1.38 V             | 274                  | 49.7             | 1.5                      |
| 6                                                  | 5412.84         | 40.0 AV                 | 54.0           | -14.0       | 1.38 V             | 274                  | 38.5             | 1.5                      |
| 7                                                  | #10420.00       | 52.1 PK                 | 68.2           | -16.1       | 2.19 V             | 64                   | 40.7             | 11.4                     |
| 8                                                  | 15630.00        | 54.0 PK                 | 74.0           | -20.0       | 3.57 V             | 86                   | 42.6             | 11.4                     |
| 9                                                  | 15630.00        | 41.2 AV                 | 54.0           | -12.8       | 3.57 V             | 86                   | 29.8             | 11.4                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 58 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 52.5 PK                 | 74.0           | -21.5       | 1.57 H             | 164                  | 50.8             | 1.7                      |
| 2                                                    | 5150.00         | 41.6 AV                 | 54.0           | -12.4       | 1.57 H             | 164                  | 39.9             | 1.7                      |
| 3                                                    | *5290.00        | 105.9 PK                |                |             | 1.57 H             | 164                  | 104.7            | 1.2                      |
| 4                                                    | *5290.00        | 96.4 AV                 |                |             | 1.57 H             | 164                  | 95.2             | 1.2                      |
| 5                                                    | 5350.00         | 66.3 PK                 | 74.0           | -7.7        | 1.57 H             | 164                  | 64.9             | 1.4                      |
| 6                                                    | 5350.00         | 52.5 AV                 | 54.0           | -1.5        | 1.57 H             | 164                  | 51.1             | 1.4                      |
| 7                                                    | #10580.00       | 54.2 PK                 | 68.2           | -14.0       | 1.36 H             | 34                   | 42.5             | 11.7                     |
| 8                                                    | 15870.00        | 54.5 PK                 | 74.0           | -19.5       | 1.58 H             | 26                   | 43.9             | 10.6                     |
| 9                                                    | 15870.00        | 41.7 AV                 | 54.0           | -12.3       | 1.58 H             | 26                   | 31.1             | 10.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.7 PK                 | 74.0           | -22.3       | 1.41 V             | 276                  | 50.0             | 1.7                      |
| 2                                                    | 5150.00         | 41.0 AV                 | 54.0           | -13.0       | 1.41 V             | 276                  | 39.3             | 1.7                      |
| 3                                                    | *5290.00        | 101.1 PK                |                |             | 1.41 V             | 276                  | 99.9             | 1.2                      |
| 4                                                    | *5290.00        | 91.2 AV                 |                |             | 1.41 V             | 276                  | 90.0             | 1.2                      |
| 5                                                    | 5350.00         | 61.1 PK                 | 74.0           | -12.9       | 1.41 V             | 276                  | 59.7             | 1.4                      |
| 6                                                    | 5350.00         | 47.9 AV                 | 54.0           | -6.1        | 1.41 V             | 276                  | 46.5             | 1.4                      |
| 7                                                    | #10580.00       | 51.5 PK                 | 68.2           | -16.7       | 2.19 V             | 83                   | 39.8             | 11.7                     |
| 8                                                    | 15870.00        | 54.6 PK                 | 74.0           | -19.4       | 3.58 V             | 105                  | 44.0             | 10.6                     |
| 9                                                    | 15870.00        | 41.6 AV                 | 54.0           | -12.4       | 3.58 V             | 105                  | 31.0             | 10.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 106 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 63.7 PK                 | 74.0           | -10.3       | 1.52 H             | 165                  | 62.1             | 1.6                      |
| 2                                                    | 5460.00         | 48.4 AV                 | 54.0           | -5.6        | 1.52 H             | 165                  | 46.8             | 1.6                      |
| 3                                                    | #5470.00        | 66.7 PK                 | 68.2           | -1.5        | 1.52 H             | 165                  | 65.1             | 1.6                      |
| 4                                                    | *5530.00        | 104.7 PK                |                |             | 1.52 H             | 165                  | 103.0            | 1.7                      |
| 5                                                    | *5530.00        | 95.4 AV                 |                |             | 1.52 H             | 165                  | 93.7             | 1.7                      |
| 6                                                    | #5817.00        | 53.2 PK                 | 68.2           | -15.0       | 1.52 H             | 165                  | 51.0             | 2.2                      |
| 7                                                    | 11060.00        | 54.4 PK                 | 74.0           | -19.6       | 1.28 H             | 26                   | 42.6             | 11.8                     |
| 8                                                    | 11060.00        | 40.6 AV                 | 54.0           | -13.4       | 1.28 H             | 26                   | 28.8             | 11.8                     |
| 9                                                    | #16590.00       | 54.5 PK                 | 68.2           | -13.7       | 1.58 H             | 21                   | 40.3             | 14.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5458.00         | 58.8 PK                 | 74.0           | -15.2       | 1.39 V             | 273                  | 57.2             | 1.6                      |
| 2                                                    | 5458.00         | 45.0 AV                 | 54.0           | -9.0        | 1.39 V             | 273                  | 43.4             | 1.6                      |
| 3                                                    | #5469.00        | 60.8 PK                 | 68.2           | -7.4        | 1.39 V             | 273                  | 59.2             | 1.6                      |
| 4                                                    | *5530.00        | 100.8 PK                |                |             | 1.39 V             | 273                  | 99.1             | 1.7                      |
| 5                                                    | *5530.00        | 90.7 AV                 |                |             | 1.39 V             | 273                  | 89.0             | 1.7                      |
| 6                                                    | #5764.62        | 52.0 PK                 | 68.2           | -16.2       | 1.39 V             | 273                  | 50.0             | 2.0                      |
| 7                                                    | 11060.00        | 52.5 PK                 | 74.0           | -21.5       | 2.22 V             | 71                   | 40.7             | 11.8                     |
| 8                                                    | 11060.00        | 39.0 AV                 | 54.0           | -15.0       | 2.22 V             | 71                   | 27.2             | 11.8                     |
| 9                                                    | #16590.00       | 54.6 PK                 | 68.2           | -13.6       | 3.50 V             | 96                   | 40.4             | 14.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 122 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5610.00        | 110.7 PK                |                |             | 1.49 H             | 162                  | 109.1            | 1.6                      |
| 2                                                    | *5610.00        | 101.0 AV                |                |             | 1.49 H             | 162                  | 99.4             | 1.6                      |
| 3                                                    | #5725.00        | 66.6 PK                 | 68.2           | -1.6        | 1.49 H             | 162                  | 64.7             | 1.9                      |
| 4                                                    | 11220.00        | 54.1 PK                 | 74.0           | -19.9       | 1.35 H             | 36                   | 42.4             | 11.7                     |
| 5                                                    | 11220.00        | 40.4 AV                 | 54.0           | -13.6       | 1.35 H             | 36                   | 28.7             | 11.7                     |
| 6                                                    | #16830.00       | 54.1 PK                 | 68.2           | -14.1       | 1.53 H             | 4                    | 39.0             | 15.1                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5610.00        | 105.2 PK                |                |             | 1.37 V             | 261                  | 103.6            | 1.6                      |
| 2                                                  | *5610.00        | 95.1 AV                 |                |             | 1.37 V             | 261                  | 93.5             | 1.6                      |
| 3                                                  | #5725.00        | 61.4 PK                 | 68.2           | -6.8        | 1.37 V             | 261                  | 59.5             | 1.9                      |
| 4                                                  | 11220.00        | 51.8 PK                 | 74.0           | -22.2       | 2.18 V             | 80                   | 40.1             | 11.7                     |
| 5                                                  | 11220.00        | 38.2 AV                 | 54.0           | -15.8       | 2.18 V             | 80                   | 26.5             | 11.7                     |
| 6                                                  | #16830.00       | 54.1 PK                 | 68.2           | -14.1       | 3.54 V             | 77                   | 39.0             | 15.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 138 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 60.5 PK                 | 74.0           | -13.5       | 2.58 H             | 163                  | 58.9             | 1.6                      |
| 2                                                    | 5460.00         | 45.8 AV                 | 54.0           | -8.2        | 2.58 H             | 163                  | 44.2             | 1.6                      |
| 3                                                    | #5470.00        | 60.8 PK                 | 68.2           | -7.4        | 2.58 H             | 163                  | 59.2             | 1.6                      |
| 4                                                    | *5690.00        | 112.4 PK                |                |             | 2.58 H             | 163                  | 110.7            | 1.7                      |
| 5                                                    | *5690.00        | 101.8 AV                |                |             | 2.58 H             | 163                  | 100.1            | 1.7                      |
| 6                                                    | #5850.00        | 65.8 PK                 | 68.2           | -2.4        | 2.58 H             | 163                  | 63.5             | 2.3                      |
| 7                                                    | 11380.00        | 54.3 PK                 | 74.0           | -19.7       | 1.30 H             | 33                   | 41.7             | 12.6                     |
| 8                                                    | 11380.00        | 40.5 AV                 | 54.0           | -13.5       | 1.30 H             | 33                   | 27.9             | 12.6                     |
| 9                                                    | #17070.00       | 54.1 PK                 | 68.2           | -14.1       | 1.51 H             | 10                   | 37.9             | 16.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 58.3 PK                 | 74.0           | -15.7       | 1.43 V             | 269                  | 56.7             | 1.6                      |
| 2                                                    | 5460.00         | 41.8 AV                 | 54.0           | -12.2       | 1.43 V             | 269                  | 40.2             | 1.6                      |
| 3                                                    | #5470.00        | 58.1 PK                 | 68.2           | -10.1       | 1.43 V             | 269                  | 56.5             | 1.6                      |
| 4                                                    | *5690.00        | 105.8 PK                |                |             | 1.43 V             | 269                  | 104.1            | 1.7                      |
| 5                                                    | *5690.00        | 95.6 AV                 |                |             | 1.43 V             | 269                  | 93.9             | 1.7                      |
| 6                                                    | #5850.00        | 62.6 PK                 | 68.2           | -5.6        | 1.43 V             | 269                  | 60.3             | 2.3                      |
| 7                                                    | 11380.00        | 51.8 PK                 | 74.0           | -22.2       | 2.21 V             | 62                   | 39.2             | 12.6                     |
| 8                                                    | 11380.00        | 38.8 AV                 | 54.0           | -15.2       | 2.21 V             | 62                   | 26.2             | 12.6                     |
| 9                                                    | #17070.00       | 53.9 PK                 | 68.2           | -14.3       | 3.56 V             | 90                   | 37.7             | 16.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 155 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5775.00        | 112.5 PK                |                |             | 2.63 H             | 26                   | 110.5            | 2.0                      |
| 2                                                    | *5775.00        | 102.3 AV                |                |             | 2.63 H             | 26                   | 100.3            | 2.0                      |
| 3                                                    | 11550.00        | 53.6 PK                 | 74.0           | -20.4       | 1.29 H             | 53                   | 40.9             | 12.7                     |
| 4                                                    | 11550.00        | 40.1 AV                 | 54.0           | -13.9       | 1.29 H             | 53                   | 27.4             | 12.7                     |
| 5                                                    | #17325.00       | 54.6 PK                 | 68.2           | -13.6       | 1.51 H             | 18                   | 38.2             | 16.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5775.00        | 105.9 PK                |                |             | 1.28 V             | 59                   | 103.9            | 2.0                      |
| 2                                                    | *5775.00        | 95.8 AV                 |                |             | 1.28 V             | 59                   | 93.8             | 2.0                      |
| 3                                                    | 11550.00        | 51.8 PK                 | 74.0           | -22.2       | 2.18 V             | 63                   | 39.1             | 12.7                     |
| 4                                                    | 11550.00        | 38.6 AV                 | 54.0           | -15.4       | 2.18 V             | 63                   | 25.9             | 12.7                     |
| 5                                                    | #17325.00       | 54.5 PK                 | 68.2           | -13.7       | 3.49 V             | 78                   | 38.1             | 16.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.



# 802.11ax (RU26)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.8 PK                 | 74.0           | -22.2       | 1.15 H             | 9                    | 50.1             | 1.7                      |
| 2                                                    | 5150.00         | 41.2 AV                 | 54.0           | -12.8       | 1.15 H             | 9                    | 39.5             | 1.7                      |
| 3                                                    | *5180.00        | 112.8 PK                |                |             | 1.15 H             | 9                    | 111.3            | 1.5                      |
| 4                                                    | *5180.00        | 103.4 AV                |                |             | 1.15 H             | 9                    | 101.9            | 1.5                      |
| 5                                                    | #10343.00       | 49.0 PK                 | 68.2           | -19.2       | 2.25 H             | 66                   | 37.9             | 11.1                     |
| 6                                                    | 15514.50        | 47.6 PK                 | 74.0           | -26.4       | 1.25 H             | 108                  | 35.9             | 11.7                     |
| 7                                                    | 15514.50        | 33.9 AV                 | 54.0           | -20.1       | 1.25 H             | 108                  | 22.2             | 11.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 51.1 PK                 | 74.0           | -22.9       | 1.00 V             | 218                  | 49.4             | 1.7                      |
| 2                                                  | 5150.00         | 39.8 AV                 | 54.0           | -14.2       | 1.00 V             | 218                  | 38.1             | 1.7                      |
| 3                                                  | *5180.00        | 107.9 PK                |                |             | 1.00 V             | 218                  | 106.4            | 1.5                      |
| 4                                                  | *5180.00        | 96.6 AV                 |                |             | 1.00 V             | 218                  | 95.1             | 1.5                      |
| 5                                                  | #10343.00       | 47.3 PK                 | 68.2           | -20.9       | 1.06 V             | 96                   | 36.2             | 11.1                     |
| 6                                                  | 15514.50        | 46.3 PK                 | 74.0           | -27.7       | 2.01 V             | 88                   | 34.6             | 11.7                     |
| 7                                                  | 15514.50        | 32.6 AV                 | 54.0           | -21.4       | 2.01 V             | 88                   | 20.9             | 11.7                     |

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 52.0 PK                 | 74.0           | -22.0       | 1.20 H             | 17                   | 50.3             | 1.7                      |
| 2                                                    | 5150.00         | 41.2 AV                 | 54.0           | -12.8       | 1.20 H             | 17                   | 39.5             | 1.7                      |
| 3                                                    | *5200.00        | 112.4 PK                |                |             | 1.20 H             | 17                   | 111.0            | 1.4                      |
| 4                                                    | *5200.00        | 102.9 AV                |                |             | 1.20 H             | 17                   | 101.5            | 1.4                      |
| 5                                                    | #10400.00       | 48.6 PK                 | 68.2           | -19.6       | 2.25 H             | 53                   | 37.1             | 11.5                     |
| 6                                                    | 15600.00        | 47.7 PK                 | 74.0           | -26.3       | 1.24 H             | 94                   | 36.2             | 11.5                     |
| 7                                                    | 15600.00        | 34.0 AV                 | 54.0           | -20.0       | 1.24 H             | 94                   | 22.5             | 11.5                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 51.4 PK                 | 74.0           | -22.6       | 1.02 V             | 211                  | 49.7             | 1.7                      |
| 2                                                  | 5150.00         | 40.1 AV                 | 54.0           | -13.9       | 1.02 V             | 211                  | 38.4             | 1.7                      |
| 3                                                  | *5200.00        | 107.5 PK                |                |             | 1.02 V             | 211                  | 106.1            | 1.4                      |
| 4                                                  | *5200.00        | 96.3 AV                 |                |             | 1.02 V             | 211                  | 94.9             | 1.4                      |
| 5                                                  | #10400.00       | 47.7 PK                 | 68.2           | -20.5       | 1.08 V             | 108                  | 36.2             | 11.5                     |
| 6                                                  | 15600.00        | 45.9 PK                 | 74.0           | -28.1       | 2.05 V             | 90                   | 34.4             | 11.5                     |
| 7                                                  | 15600.00        | 32.1 AV                 | 54.0           | -21.9       | 2.05 V             | 90                   | 20.6             | 11.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.8 PK                 | 74.0           | -22.2       | 1.15 H             | 30                   | 50.1             | 1.7                      |
| 2                                                    | 5150.00         | 41.1 AV                 | 54.0           | -12.9       | 1.15 H             | 30                   | 39.4             | 1.7                      |
| 3                                                    | *5240.00        | 112.3 PK                |                |             | 1.15 H             | 30                   | 111.1            | 1.2                      |
| 4                                                    | *5240.00        | 103.2 AV                |                |             | 1.15 H             | 30                   | 102.0            | 1.2                      |
| 5                                                    | #10497.00       | 49.3 PK                 | 68.2           | -18.9       | 2.20 H             | 79                   | 37.9             | 11.4                     |
| 6                                                    | 15745.50        | 48.1 PK                 | 74.0           | -25.9       | 1.20 H             | 118                  | 37.2             | 10.9                     |
| 7                                                    | 15745.50        | 34.2 AV                 | 54.0           | -19.8       | 1.20 H             | 118                  | 23.3             | 10.9                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 50.8 PK                 | 74.0           | -23.2       | 1.03 V             | 210                  | 49.1             | 1.7                      |
| 2                                                  | 5150.00         | 39.5 AV                 | 54.0           | -14.5       | 1.03 V             | 210                  | 37.8             | 1.7                      |
| 3                                                  | *5240.00        | 108.1 PK                |                |             | 1.03 V             | 210                  | 106.9            | 1.2                      |
| 4                                                  | *5240.00        | 96.7 AV                 |                |             | 1.03 V             | 210                  | 95.5             | 1.2                      |
| 5                                                  | #10497.00       | 46.7 PK                 | 68.2           | -21.5       | 1.06 V             | 103                  | 35.3             | 11.4                     |
| 6                                                  | 15745.50        | 46.6 PK                 | 74.0           | -27.4       | 1.96 V             | 87                   | 35.7             | 10.9                     |
| 7                                                  | 15745.50        | 32.7 AV                 | 54.0           | -21.3       | 1.96 V             | 87                   | 21.8             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 112.4 PK                |                |             | 1.19 H             | 31                   | 111.2            | 1.2                      |
| 2                                                    | *5260.00        | 103.3 AV                |                |             | 1.19 H             | 31                   | 102.1            | 1.2                      |
| 3                                                    | 5350.00         | 51.3 PK                 | 74.0           | -22.7       | 1.19 H             | 31                   | 49.9             | 1.4                      |
| 4                                                    | 5350.00         | 40.8 AV                 | 54.0           | -13.2       | 1.19 H             | 31                   | 39.4             | 1.4                      |
| 5                                                    | #10503.00       | 48.6 PK                 | 68.2           | -19.6       | 2.26 H             | 64                   | 37.2             | 11.4                     |
| 6                                                    | 15754.50        | 47.0 PK                 | 74.0           | -27.0       | 1.29 H             | 99                   | 36.2             | 10.8                     |
| 7                                                    | 15754.50        | 33.5 AV                 | 54.0           | -20.5       | 1.29 H             | 99                   | 22.7             | 10.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5260.00        | 107.4 PK                |                |             | 1.05 V             | 233                  | 106.2            | 1.2                      |
| 2                                                  | *5260.00        | 96.2 AV                 |                |             | 1.05 V             | 233                  | 95.0             | 1.2                      |
| 3                                                  | 5350.00         | 51.5 PK                 | 74.0           | -22.5       | 1.05 V             | 233                  | 50.1             | 1.4                      |
| 4                                                  | 5350.00         | 40.1 AV                 | 54.0           | -13.9       | 1.05 V             | 233                  | 38.7             | 1.4                      |
| 5                                                  | #10503.00       | 47.4 PK                 | 68.2           | -20.8       | 1.04 V             | 108                  | 36.0             | 11.4                     |
| 6                                                  | 15754.50        | 45.9 PK                 | 74.0           | -28.1       | 2.02 V             | 90                   | 35.1             | 10.8                     |
| 7                                                  | 15754.50        | 32.3 AV                 | 54.0           | -21.7       | 2.02 V             | 90                   | 21.5             | 10.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 60 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 111.8 PK                |                |             | 1.14 H             | 43                   | 110.6            | 1.2                      |
| 2                                                    | *5300.00        | 103.0 AV                |                |             | 1.14 H             | 43                   | 101.8            | 1.2                      |
| 3                                                    | 5350.00         | 52.0 PK                 | 74.0           | -22.0       | 1.14 H             | 43                   | 50.6             | 1.4                      |
| 4                                                    | 5350.00         | 41.5 AV                 | 54.0           | -12.5       | 1.14 H             | 43                   | 40.1             | 1.4                      |
| 5                                                    | 10600.00        | 49.1 PK                 | 74.0           | -24.9       | 2.20 H             | 52                   | 37.3             | 11.8                     |
| 6                                                    | 10600.00        | 37.2 AV                 | 54.0           | -16.8       | 2.20 H             | 52                   | 25.4             | 11.8                     |
| 7                                                    | 15900.00        | 47.5 PK                 | 74.0           | -26.5       | 1.25 H             | 106                  | 36.8             | 10.7                     |
| 8                                                    | 15900.00        | 33.6 AV                 | 54.0           | -20.4       | 1.25 H             | 106                  | 22.9             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 107.6 PK                |                |             | 1.00 V             | 219                  | 106.4            | 1.2                      |
| 2                                                    | *5300.00        | 96.6 AV                 |                |             | 1.00 V             | 219                  | 95.4             | 1.2                      |
| 3                                                    | 5350.00         | 50.9 PK                 | 74.0           | -23.1       | 1.00 V             | 219                  | 49.5             | 1.4                      |
| 4                                                    | 5350.00         | 39.6 AV                 | 54.0           | -14.4       | 1.00 V             | 219                  | 38.2             | 1.4                      |
| 5                                                    | 10600.00        | 47.1 PK                 | 74.0           | -26.9       | 1.11 V             | 107                  | 35.3             | 11.8                     |
| 6                                                    | 10600.00        | 35.5 AV                 | 54.0           | -18.5       | 1.11 V             | 107                  | 23.7             | 11.8                     |
| 7                                                    | 15900.00        | 46.2 PK                 | 74.0           | -27.8       | 1.98 V             | 103                  | 35.5             | 10.7                     |
| 8                                                    | 15900.00        | 32.3 AV                 | 54.0           | -21.7       | 1.98 V             | 103                  | 21.6             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>Channel</b>         | TX Channel 64 | <b>Detector Function</b> | Peak (PK)    |
| <b>Frequency Range</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 113.7 PK                |                |             | 2.67 H             | 172                  | 112.3            | 1.4                      |
| 2                                                    | *5320.00        | 103.9 AV                |                |             | 2.67 H             | 172                  | 102.5            | 1.4                      |
| 3                                                    | 5350.00         | 51.1 PK                 | 74.0           | -22.9       | 2.67 H             | 172                  | 49.7             | 1.4                      |
| 4                                                    | 5350.00         | 41.0 AV                 | 54.0           | -13.0       | 2.67 H             | 172                  | 39.6             | 1.4                      |
| 5                                                    | 10657.00        | 49.1 PK                 | 74.0           | -24.9       | 2.20 H             | 67                   | 37.1             | 12.0                     |
| 6                                                    | 10657.00        | 37.0 AV                 | 54.0           | -17.0       | 2.20 H             | 67                   | 25.0             | 12.0                     |
| 7                                                    | 15985.50        | 46.8 PK                 | 74.0           | -27.2       | 1.23 H             | 96                   | 35.8             | 11.0                     |
| 8                                                    | 15985.50        | 33.4 AV                 | 54.0           | -20.6       | 1.23 H             | 96                   | 22.4             | 11.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 107.4 PK                |                |             | 1.02 V             | 207                  | 106.0            | 1.4                      |
| 2                                                    | *5320.00        | 96.5 AV                 |                |             | 1.02 V             | 207                  | 95.1             | 1.4                      |
| 3                                                    | 5350.00         | 50.7 PK                 | 74.0           | -23.3       | 1.02 V             | 207                  | 49.3             | 1.4                      |
| 4                                                    | 5350.00         | 39.1 AV                 | 54.0           | -14.9       | 1.02 V             | 207                  | 37.7             | 1.4                      |
| 5                                                    | 10657.00        | 47.0 PK                 | 74.0           | -27.0       | 1.01 V             | 112                  | 35.0             | 12.0                     |
| 6                                                    | 10657.00        | 35.6 AV                 | 54.0           | -18.4       | 1.01 V             | 112                  | 23.6             | 12.0                     |
| 7                                                    | 15985.50        | 46.2 PK                 | 74.0           | -27.8       | 2.04 V             | 87                   | 35.2             | 11.0                     |
| 8                                                    | 15985.50        | 32.5 AV                 | 54.0           | -21.5       | 2.04 V             | 87                   | 21.5             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5450.35         | 54.2 PK                 | 74.0           | -19.8       | 2.69 H             | 174                  | 52.6             | 1.6                      |
| 2                                                    | 5450.35         | 40.0 AV                 | 54.0           | -14.0       | 2.69 H             | 174                  | 38.4             | 1.6                      |
| 3                                                    | #5470.00        | 51.2 PK                 | 68.2           | -17.0       | 2.69 H             | 174                  | 49.6             | 1.6                      |
| 4                                                    | *5500.00        | 113.4 PK                |                |             | 2.69 H             | 174                  | 111.7            | 1.7                      |
| 5                                                    | *5500.00        | 103.8 AV                |                |             | 2.69 H             | 174                  | 102.1            | 1.7                      |
| 6                                                    | 10983.00        | 49.1 PK                 | 74.0           | -24.9       | 2.27 H             | 56                   | 36.8             | 12.3                     |
| 7                                                    | 10983.00        | 37.3 AV                 | 54.0           | -16.7       | 2.27 H             | 56                   | 25.0             | 12.3                     |
| 8                                                    | #16474.50       | 47.4 PK                 | 68.2           | -20.8       | 1.23 H             | 96                   | 34.2             | 13.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 50.7 PK                 | 74.0           | -23.3       | 1.10 V             | 202                  | 49.1             | 1.6                      |
| 2                                                    | 5460.00         | 39.1 AV                 | 54.0           | -14.9       | 1.10 V             | 202                  | 37.5             | 1.6                      |
| 3                                                    | #5465.77        | 51.2 PK                 | 68.2           | -17.0       | 1.10 V             | 202                  | 49.6             | 1.6                      |
| 4                                                    | *5500.00        | 107.4 PK                |                |             | 1.10 V             | 202                  | 105.7            | 1.7                      |
| 5                                                    | *5500.00        | 96.7 AV                 |                |             | 1.10 V             | 202                  | 95.0             | 1.7                      |
| 6                                                    | 10983.00        | 47.4 PK                 | 74.0           | -26.6       | 1.04 V             | 99                   | 35.1             | 12.3                     |
| 7                                                    | 10983.00        | 35.7 AV                 | 54.0           | -18.3       | 1.04 V             | 99                   | 23.4             | 12.3                     |
| 8                                                    | #16474.50       | 46.1 PK                 | 68.2           | -22.1       | 2.04 V             | 97                   | 32.9             | 13.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 113.0 PK                |                |             | 2.65 H             | 187                  | 111.3            | 1.7                      |
| 2                                                    | *5580.00        | 103.4 AV                |                |             | 2.65 H             | 187                  | 101.7            | 1.7                      |
| 3                                                    | 11160.00        | 48.5 PK                 | 74.0           | -25.5       | 2.31 H             | 78                   | 36.9             | 11.6                     |
| 4                                                    | 11160.00        | 36.7 AV                 | 54.0           | -17.3       | 2.31 H             | 78                   | 25.1             | 11.6                     |
| 5                                                    | #16740.00       | 47.6 PK                 | 68.2           | -20.6       | 1.25 H             | 105                  | 32.9             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 107.3 PK                |                |             | 1.12 V             | 195                  | 105.6            | 1.7                      |
| 2                                                    | *5580.00        | 96.7 AV                 |                |             | 1.12 V             | 195                  | 95.0             | 1.7                      |
| 3                                                    | 11160.00        | 47.4 PK                 | 74.0           | -26.6       | 1.03 V             | 105                  | 35.8             | 11.6                     |
| 4                                                    | 11160.00        | 35.8 AV                 | 54.0           | -18.2       | 1.03 V             | 105                  | 24.2             | 11.6                     |
| 5                                                    | #16740.00       | 46.6 PK                 | 68.2           | -21.6       | 2.06 V             | 85                   | 31.9             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 113.0 PK                |                |             | 2.59 H             | 179                  | 111.2            | 1.8                      |
| 2                                                    | *5700.00        | 103.2 AV                |                |             | 2.59 H             | 179                  | 101.4            | 1.8                      |
| 3                                                    | #5725.00        | 52.7 PK                 | 68.2           | -15.5       | 2.59 H             | 179                  | 50.8             | 1.9                      |
| 4                                                    | 11417.00        | 48.5 PK                 | 74.0           | -25.5       | 2.15 H             | 104                  | 35.7             | 12.8                     |
| 5                                                    | 11417.00        | 36.8 AV                 | 54.0           | -17.2       | 2.15 H             | 104                  | 24.0             | 12.8                     |
| 6                                                    | #17125.50       | 47.6 PK                 | 68.2           | -20.6       | 1.17 H             | 86                   | 31.4             | 16.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 106.9 PK                |                |             | 1.14 V             | 205                  | 105.1            | 1.8                      |
| 2                                                    | *5700.00        | 96.5 AV                 |                |             | 1.14 V             | 205                  | 94.7             | 1.8                      |
| 3                                                    | #5725.00        | 52.1 PK                 | 68.2           | -16.1       | 1.14 V             | 205                  | 50.2             | 1.9                      |
| 4                                                    | 11417.00        | 48.6 PK                 | 74.0           | -25.4       | 1.08 V             | 76                   | 35.8             | 12.8                     |
| 5                                                    | 11417.00        | 36.5 AV                 | 54.0           | -17.5       | 1.08 V             | 76                   | 23.7             | 12.8                     |
| 6                                                    | #17125.50       | 47.8 PK                 | 68.2           | -20.4       | 1.96 V             | 106                  | 31.6             | 16.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.5 PK                 | 74.0           | -22.5       | 2.71 H             | 187                  | 49.9             | 1.6                      |
| 2                                                    | 5460.00         | 39.8 AV                 | 54.0           | -14.2       | 2.71 H             | 187                  | 38.2             | 1.6                      |
| 3                                                    | #5470.00        | 52.9 PK                 | 68.2           | -15.3       | 2.71 H             | 187                  | 51.3             | 1.6                      |
| 4                                                    | *5720.00        | 113.8 PK                |                |             | 2.71 H             | 187                  | 111.9            | 1.9                      |
| 5                                                    | *5720.00        | 103.9 AV                |                |             | 2.71 H             | 187                  | 102.0            | 1.9                      |
| 6                                                    | #5850.00        | 51.5 PK                 | 68.2           | -16.7       | 2.71 H             | 187                  | 49.2             | 2.3                      |
| 7                                                    | 11456.00        | 49.0 PK                 | 74.0           | -25.0       | 2.27 H             | 69                   | 36.4             | 12.6                     |
| 8                                                    | 11456.00        | 37.3 AV                 | 54.0           | -16.7       | 2.27 H             | 69                   | 24.7             | 12.6                     |
| 9                                                    | #17184.00       | 47.5 PK                 | 68.2           | -20.7       | 1.27 H             | 107                  | 31.6             | 15.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.6 PK                 | 74.0           | -22.4       | 1.07 V             | 202                  | 50.0             | 1.6                      |
| 2                                                    | 5460.00         | 39.7 AV                 | 54.0           | -14.3       | 1.07 V             | 202                  | 38.1             | 1.6                      |
| 3                                                    | #5470.00        | 53.2 PK                 | 68.2           | -15.0       | 1.07 V             | 202                  | 51.6             | 1.6                      |
| 4                                                    | *5720.00        | 107.8 PK                |                |             | 1.07 V             | 202                  | 105.9            | 1.9                      |
| 5                                                    | *5720.00        | 97.0 AV                 |                |             | 1.07 V             | 202                  | 95.1             | 1.9                      |
| 6                                                    | #5850.00        | 51.8 PK                 | 68.2           | -16.4       | 1.07 V             | 202                  | 49.5             | 2.3                      |
| 7                                                    | 11456.00        | 47.1 PK                 | 74.0           | -26.9       | 1.11 V             | 104                  | 34.5             | 12.6                     |
| 8                                                    | 11456.00        | 35.1 AV                 | 54.0           | -18.9       | 1.11 V             | 104                  | 22.5             | 12.6                     |
| 9                                                    | #17184.00       | 47.0 PK                 | 68.2           | -21.2       | 1.99 V             | 88                   | 31.1             | 15.9                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5576.28        | 59.1 PK                 | 68.2           | -9.1        | 1.06 H             | 216                  | 57.4             | 1.7                      |
| 2                                                    | *5745.00        | 125.5 PK                |                |             | 1.06 H             | 216                  | 123.6            | 1.9                      |
| 3                                                    | *5745.00        | 118.5 AV                |                |             | 1.06 H             | 216                  | 116.6            | 1.9                      |
| 4                                                    | #5950.38        | 66.0 PK                 | 68.2           | -2.2        | 1.06 H             | 216                  | 63.5             | 2.5                      |
| 5                                                    | 11473.00        | 53.0 PK                 | 74.0           | -21.0       | 2.24 H             | 84                   | 40.5             | 12.5                     |
| 6                                                    | 11473.00        | 43.9 AV                 | 54.0           | -10.1       | 2.24 H             | 84                   | 31.4             | 12.5                     |
| 7                                                    | #17209.50       | 54.0 PK                 | 68.2           | -14.2       | 1.15 H             | 65                   | 38.2             | 15.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5577.09        | 54.9 PK                 | 68.2           | -13.3       | 2.65 V             | 165                  | 53.2             | 1.7                      |
| 2                                                    | *5745.00        | 119.9 PK                |                |             | 2.65 V             | 165                  | 118.0            | 1.9                      |
| 3                                                    | *5745.00        | 112.9 AV                |                |             | 2.65 V             | 165                  | 111.0            | 1.9                      |
| 4                                                    | #5947.99        | 53.4 PK                 | 68.2           | -14.8       | 2.65 V             | 165                  | 50.9             | 2.5                      |
| 5                                                    | 11473.00        | 54.1 PK                 | 74.0           | -19.9       | 1.00 V             | 83                   | 41.6             | 12.5                     |
| 6                                                    | 11473.00        | 44.6 AV                 | 54.0           | -9.4        | 1.00 V             | 83                   | 32.1             | 12.5                     |
| 7                                                    | #17209.50       | 59.1 PK                 | 68.2           | -9.1        | 2.00 V             | 103                  | 43.3             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5625.60        | 58.8 PK                 | 68.2           | -9.4        | 1.12 H             | 216                  | 57.1             | 1.7                      |
| 2                                                    | *5785.00        | 125.9 PK                |                |             | 1.12 H             | 216                  | 123.9            | 2.0                      |
| 3                                                    | *5785.00        | 119.0 AV                |                |             | 1.12 H             | 216                  | 117.0            | 2.0                      |
| 4                                                    | #5945.71        | 58.8 PK                 | 68.2           | -9.4        | 1.12 H             | 216                  | 56.3             | 2.5                      |
| 5                                                    | 11570.00        | 52.9 PK                 | 74.0           | -21.1       | 2.24 H             | 95                   | 40.0             | 12.9                     |
| 6                                                    | 11570.00        | 43.9 AV                 | 54.0           | -10.1       | 2.24 H             | 95                   | 31.0             | 12.9                     |
| 7                                                    | #17355.00       | 53.9 PK                 | 68.2           | -14.3       | 1.16 H             | 92                   | 37.1             | 16.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5625.34        | 55.7 PK                 | 68.2           | -12.5       | 2.70 V             | 169                  | 54.0             | 1.7                      |
| 2                                                  | *5785.00        | 119.7 PK                |                |             | 2.70 V             | 169                  | 117.7            | 2.0                      |
| 3                                                  | *5785.00        | 113.4 AV                |                |             | 2.70 V             | 169                  | 111.4            | 2.0                      |
| 4                                                  | #5944.12        | 56.9 PK                 | 68.2           | -11.3       | 2.70 V             | 169                  | 54.4             | 2.5                      |
| 5                                                  | 11570.00        | 53.8 PK                 | 74.0           | -20.2       | 1.02 V             | 82                   | 40.9             | 12.9                     |
| 6                                                  | 11570.00        | 44.2 AV                 | 54.0           | -9.8        | 1.02 V             | 82                   | 31.3             | 12.9                     |
| 7                                                  | #17355.00       | 59.7 PK                 | 68.2           | -8.5        | 1.94 V             | 101                  | 42.9             | 16.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5592.81        | 56.8 PK                 | 68.2           | -11.4       | 1.09 H             | 188                  | 55.2             | 1.6                      |
| 2                                                    | *5825.00        | 125.6 PK                |                |             | 1.09 H             | 188                  | 123.4            | 2.2                      |
| 3                                                    | *5825.00        | 120.0 AV                |                |             | 1.09 H             | 188                  | 117.8            | 2.2                      |
| 4                                                    | #5994.01        | 59.4 PK                 | 68.2           | -8.8        | 1.09 H             | 188                  | 56.8             | 2.6                      |
| 5                                                    | 11666.80        | 52.7 PK                 | 74.0           | -21.3       | 2.15 H             | 92                   | 39.8             | 12.9                     |
| 6                                                    | 11666.80        | 43.8 AV                 | 54.0           | -10.2       | 2.15 H             | 92                   | 30.9             | 12.9                     |
| 7                                                    | #17500.20       | 54.4 PK                 | 68.2           | -13.8       | 1.15 H             | 87                   | 35.2             | 19.2                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5592.38        | 53.3 PK                 | 68.2           | -14.9       | 2.63 V             | 161                  | 51.7             | 1.6                      |
| 2                                                  | *5825.00        | 120.7 PK                |                |             | 2.63 V             | 161                  | 118.5            | 2.2                      |
| 3                                                  | *5825.00        | 114.0 AV                |                |             | 2.63 V             | 161                  | 111.8            | 2.2                      |
| 4                                                  | #5993.38        | 55.6 PK                 | 68.2           | -12.6       | 2.63 V             | 161                  | 53.0             | 2.6                      |
| 5                                                  | 11666.80        | 54.4 PK                 | 74.0           | -19.6       | 1.08 V             | 70                   | 41.5             | 12.9                     |
| 6                                                  | 11666.80        | 45.0 AV                 | 54.0           | -9.0        | 1.08 V             | 70                   | 32.1             | 12.9                     |
| 7                                                  | #17500.20       | 58.7 PK                 | 68.2           | -9.5        | 2.02 V             | 107                  | 39.5             | 19.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

# 802.11ax (RU52)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.0 PK                 | 74.0           | -23.0       | 2.58 H             | 173                  | 49.3             | 1.7                      |
| 2                                                    | 5150.00         | 40.5 AV                 | 54.0           | -13.5       | 2.58 H             | 173                  | 38.8             | 1.7                      |
| 3                                                    | *5180.00        | 111.1 PK                |                |             | 2.58 H             | 173                  | 109.6            | 1.5                      |
| 4                                                    | *5180.00        | 102.6 AV                |                |             | 2.58 H             | 173                  | 101.1            | 1.5                      |
| 5                                                    | #10345.00       | 49.1 PK                 | 68.2           | -19.1       | 2.25 H             | 80                   | 38.0             | 11.1                     |
| 6                                                    | 15517.50        | 48.2 PK                 | 74.0           | -25.8       | 1.19 H             | 93                   | 36.5             | 11.7                     |
| 7                                                    | 15517.50        | 34.4 AV                 | 54.0           | -19.6       | 1.19 H             | 93                   | 22.7             | 11.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 50.5 PK                 | 74.0           | -23.5       | 3.83 V             | 56                   | 48.8             | 1.7                      |
| 2                                                  | 5150.00         | 40.0 AV                 | 54.0           | -14.0       | 3.83 V             | 56                   | 38.3             | 1.7                      |
| 3                                                  | *5180.00        | 106.2 PK                |                |             | 3.83 V             | 56                   | 104.7            | 1.5                      |
| 4                                                  | *5180.00        | 96.8 AV                 |                |             | 3.83 V             | 56                   | 95.3             | 1.5                      |
| 5                                                  | #10345.00       | 47.7 PK                 | 68.2           | -20.5       | 1.06 V             | 85                   | 36.6             | 11.1                     |
| 6                                                  | 15517.50        | 46.7 PK                 | 74.0           | -27.3       | 2.07 V             | 103                  | 35.0             | 11.7                     |
| 7                                                  | 15517.50        | 33.0 AV                 | 54.0           | -21.0       | 2.07 V             | 103                  | 21.3             | 11.7                     |

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 50.7 PK                 | 74.0           | -23.3       | 2.55 H             | 159                  | 49.0             | 1.7                      |
| 2                                                    | 5150.00         | 40.2 AV                 | 54.0           | -13.8       | 2.55 H             | 159                  | 38.5             | 1.7                      |
| 3                                                    | *5200.00        | 111.3 PK                |                |             | 2.55 H             | 159                  | 109.9            | 1.4                      |
| 4                                                    | *5200.00        | 102.8 AV                |                |             | 2.55 H             | 159                  | 101.4            | 1.4                      |
| 5                                                    | #10406.00       | 49.1 PK                 | 68.2           | -19.1       | 2.27 H             | 56                   | 37.6             | 11.5                     |
| 6                                                    | 15609.00        | 47.8 PK                 | 74.0           | -26.2       | 1.24 H             | 108                  | 36.3             | 11.5                     |
| 7                                                    | 15609.00        | 34.1 AV                 | 54.0           | -19.9       | 1.24 H             | 108                  | 22.6             | 11.5                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 49.9 PK                 | 74.0           | -24.1       | 3.78 V             | 42                   | 48.2             | 1.7                      |
| 2                                                  | 5150.00         | 39.6 AV                 | 54.0           | -14.4       | 3.78 V             | 42                   | 37.9             | 1.7                      |
| 3                                                  | *5200.00        | 106.0 PK                |                |             | 3.78 V             | 42                   | 104.6            | 1.4                      |
| 4                                                  | *5200.00        | 96.7 AV                 |                |             | 3.78 V             | 42                   | 95.3             | 1.4                      |
| 5                                                  | #10406.00       | 47.3 PK                 | 68.2           | -20.9       | 1.10 V             | 111                  | 35.8             | 11.5                     |
| 6                                                  | 15609.00        | 46.1 PK                 | 74.0           | -27.9       | 2.06 V             | 103                  | 34.6             | 11.5                     |
| 7                                                  | 15609.00        | 32.5 AV                 | 54.0           | -21.5       | 2.06 V             | 103                  | 21.0             | 11.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 50.7 PK                 | 74.0           | -23.3       | 2.57 H             | 160                  | 49.0             | 1.7                      |
| 2                                                    | 5150.00         | 40.3 AV                 | 54.0           | -13.7       | 2.57 H             | 160                  | 38.6             | 1.7                      |
| 3                                                    | *5240.00        | 111.4 PK                |                |             | 2.57 H             | 160                  | 110.2            | 1.2                      |
| 4                                                    | *5240.00        | 103.1 AV                |                |             | 2.57 H             | 160                  | 101.9            | 1.2                      |
| 5                                                    | #10494.00       | 48.7 PK                 | 68.2           | -19.5       | 2.21 H             | 64                   | 37.3             | 11.4                     |
| 6                                                    | 15741.00        | 47.8 PK                 | 74.0           | -26.2       | 1.30 H             | 122                  | 36.8             | 11.0                     |
| 7                                                    | 15741.00        | 34.2 AV                 | 54.0           | -19.8       | 1.30 H             | 122                  | 23.2             | 11.0                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 50.7 PK                 | 74.0           | -23.3       | 3.85 V             | 55                   | 49.0             | 1.7                      |
| 2                                                  | 5150.00         | 40.1 AV                 | 54.0           | -13.9       | 3.85 V             | 55                   | 38.4             | 1.7                      |
| 3                                                  | *5240.00        | 106.4 PK                |                |             | 3.85 V             | 55                   | 105.2            | 1.2                      |
| 4                                                  | *5240.00        | 97.2 AV                 |                |             | 3.85 V             | 55                   | 96.0             | 1.2                      |
| 5                                                  | #10494.00       | 47.2 PK                 | 68.2           | -21.0       | 1.10 V             | 91                   | 35.8             | 11.4                     |
| 6                                                  | 15741.00        | 46.0 PK                 | 74.0           | -28.0       | 1.97 V             | 74                   | 35.0             | 11.0                     |
| 7                                                  | 15741.00        | 32.1 AV                 | 54.0           | -21.9       | 1.97 V             | 74                   | 21.1             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 111.0 PK                |                |             | 2.62 H             | 158                  | 109.8            | 1.2                      |
| 2                                                    | *5260.00        | 102.7 AV                |                |             | 2.62 H             | 158                  | 101.5            | 1.2                      |
| 3                                                    | 5350.00         | 51.5 PK                 | 74.0           | -22.5       | 2.62 H             | 158                  | 50.1             | 1.4                      |
| 4                                                    | 5350.00         | 40.8 AV                 | 54.0           | -13.2       | 2.62 H             | 158                  | 39.4             | 1.4                      |
| 5                                                    | #10505.00       | 48.5 PK                 | 68.2           | -19.7       | 2.27 H             | 64                   | 37.1             | 11.4                     |
| 6                                                    | 15757.50        | 47.8 PK                 | 74.0           | -26.2       | 1.29 H             | 95                   | 37.0             | 10.8                     |
| 7                                                    | 15757.50        | 34.0 AV                 | 54.0           | -20.0       | 1.29 H             | 95                   | 23.2             | 10.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5260.00        | 106.5 PK                |                |             | 3.87 V             | 72                   | 105.3            | 1.2                      |
| 2                                                  | *5260.00        | 96.8 AV                 |                |             | 3.87 V             | 72                   | 95.6             | 1.2                      |
| 3                                                  | 5350.00         | 50.3 PK                 | 74.0           | -23.7       | 3.87 V             | 72                   | 48.9             | 1.4                      |
| 4                                                  | 5350.00         | 40.0 AV                 | 54.0           | -14.0       | 3.87 V             | 72                   | 38.6             | 1.4                      |
| 5                                                  | #10505.00       | 47.0 PK                 | 68.2           | -21.2       | 1.06 V             | 88                   | 35.6             | 11.4                     |
| 6                                                  | 15757.50        | 46.4 PK                 | 74.0           | -27.6       | 2.06 V             | 85                   | 35.6             | 10.8                     |
| 7                                                  | 15757.50        | 32.5 AV                 | 54.0           | -21.5       | 2.06 V             | 85                   | 21.7             | 10.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 60 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 110.9 PK                |                |             | 2.63 H             | 182                  | 109.7            | 1.2                      |
| 2                                                    | *5300.00        | 102.3 AV                |                |             | 2.63 H             | 182                  | 101.1            | 1.2                      |
| 3                                                    | 5350.00         | 51.0 PK                 | 74.0           | -23.0       | 2.63 H             | 182                  | 49.6             | 1.4                      |
| 4                                                    | 5350.00         | 40.5 AV                 | 54.0           | -13.5       | 2.63 H             | 182                  | 39.1             | 1.4                      |
| 5                                                    | 10606.00        | 48.4 PK                 | 74.0           | -25.6       | 2.27 H             | 57                   | 36.6             | 11.8                     |
| 6                                                    | 10606.00        | 36.8 AV                 | 54.0           | -17.2       | 2.27 H             | 57                   | 25.0             | 11.8                     |
| 7                                                    | 15909.00        | 47.6 PK                 | 74.0           | -26.4       | 1.21 H             | 97                   | 36.9             | 10.7                     |
| 8                                                    | 15909.00        | 34.1 AV                 | 54.0           | -19.9       | 1.21 H             | 97                   | 23.4             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 106.1 PK                |                |             | 3.78 V             | 46                   | 104.9            | 1.2                      |
| 2                                                    | *5300.00        | 96.4 AV                 |                |             | 3.78 V             | 46                   | 95.2             | 1.2                      |
| 3                                                    | 5350.00         | 50.1 PK                 | 74.0           | -23.9       | 3.78 V             | 46                   | 48.7             | 1.4                      |
| 4                                                    | 5350.00         | 39.9 AV                 | 54.0           | -14.1       | 3.78 V             | 46                   | 38.5             | 1.4                      |
| 5                                                    | 10606.00        | 46.9 PK                 | 74.0           | -27.1       | 1.03 V             | 99                   | 35.1             | 11.8                     |
| 6                                                    | 10606.00        | 35.3 AV                 | 54.0           | -18.7       | 1.03 V             | 99                   | 23.5             | 11.8                     |
| 7                                                    | 15909.00        | 45.9 PK                 | 74.0           | -28.1       | 1.98 V             | 88                   | 35.2             | 10.7                     |
| 8                                                    | 15909.00        | 32.2 AV                 | 54.0           | -21.8       | 1.98 V             | 88                   | 21.5             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 64 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 112.0 PK                |                |             | 2.55 H             | 170                  | 110.6            | 1.4                      |
| 2                                                    | *5320.00        | 102.4 AV                |                |             | 2.55 H             | 170                  | 101.0            | 1.4                      |
| 3                                                    | 5350.00         | 50.6 PK                 | 74.0           | -23.4       | 2.55 H             | 170                  | 49.2             | 1.4                      |
| 4                                                    | 5350.00         | 41.0 AV                 | 54.0           | -13.0       | 2.55 H             | 170                  | 39.6             | 1.4                      |
| 5                                                    | 10654.00        | 48.9 PK                 | 74.0           | -25.1       | 2.28 H             | 58                   | 36.9             | 12.0                     |
| 6                                                    | 10654.00        | 37.1 AV                 | 54.0           | -16.9       | 2.28 H             | 58                   | 25.1             | 12.0                     |
| 7                                                    | 15981.00        | 48.0 PK                 | 74.0           | -26.0       | 1.24 H             | 111                  | 37.0             | 11.0                     |
| 8                                                    | 15981.00        | 34.3 AV                 | 54.0           | -19.7       | 1.24 H             | 111                  | 23.3             | 11.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 106.3 PK                |                |             | 3.84 V             | 60                   | 104.9            | 1.4                      |
| 2                                                    | *5320.00        | 96.9 AV                 |                |             | 3.84 V             | 60                   | 95.5             | 1.4                      |
| 3                                                    | 5350.00         | 49.3 PK                 | 74.0           | -24.7       | 3.84 V             | 60                   | 47.9             | 1.4                      |
| 4                                                    | 5350.00         | 39.5 AV                 | 54.0           | -14.5       | 3.84 V             | 60                   | 38.1             | 1.4                      |
| 5                                                    | 10654.00        | 47.2 PK                 | 74.0           | -26.8       | 1.11 V             | 90                   | 35.2             | 12.0                     |
| 6                                                    | 10654.00        | 35.5 AV                 | 54.0           | -18.5       | 1.11 V             | 90                   | 23.5             | 12.0                     |
| 7                                                    | 15981.00        | 46.4 PK                 | 74.0           | -27.6       | 2.06 V             | 76                   | 35.4             | 11.0                     |
| 8                                                    | 15981.00        | 32.9 AV                 | 54.0           | -21.1       | 2.06 V             | 76                   | 21.9             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5448.50         | 51.3 PK                 | 74.0           | -22.7       | 2.53 H             | 174                  | 49.7             | 1.6                      |
| 2                                                    | 5448.50         | 40.4 AV                 | 54.0           | -13.6       | 2.53 H             | 174                  | 38.8             | 1.6                      |
| 3                                                    | #5470.00        | 50.9 PK                 | 68.2           | -17.3       | 2.53 H             | 174                  | 49.3             | 1.6                      |
| 4                                                    | *5500.00        | 113.5 PK                |                |             | 2.53 H             | 174                  | 111.8            | 1.7                      |
| 5                                                    | *5500.00        | 102.8 AV                |                |             | 2.53 H             | 174                  | 101.1            | 1.7                      |
| 6                                                    | 10985.00        | 49.1 PK                 | 74.0           | -24.9       | 2.21 H             | 56                   | 36.9             | 12.2                     |
| 7                                                    | 10985.00        | 37.3 AV                 | 54.0           | -16.7       | 2.21 H             | 56                   | 25.1             | 12.2                     |
| 8                                                    | #16477.50       | 47.5 PK                 | 68.2           | -20.7       | 1.25 H             | 97                   | 34.3             | 13.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 52.3 PK                 | 74.0           | -21.7       | 3.79 V             | 66                   | 50.7             | 1.6                      |
| 2                                                    | 5460.00         | 39.6 AV                 | 54.0           | -14.4       | 3.79 V             | 66                   | 38.0             | 1.6                      |
| 3                                                    | #5470.00        | 49.9 PK                 | 68.2           | -18.3       | 3.79 V             | 66                   | 48.3             | 1.6                      |
| 4                                                    | *5500.00        | 107.1 PK                |                |             | 3.79 V             | 66                   | 105.4            | 1.7                      |
| 5                                                    | *5500.00        | 96.8 AV                 |                |             | 3.79 V             | 66                   | 95.1             | 1.7                      |
| 6                                                    | 10985.00        | 46.8 PK                 | 74.0           | -27.2       | 1.11 V             | 94                   | 34.6             | 12.2                     |
| 7                                                    | 10985.00        | 35.3 AV                 | 54.0           | -18.7       | 1.11 V             | 94                   | 23.1             | 12.2                     |
| 8                                                    | #16477.50       | 46.6 PK                 | 68.2           | -21.6       | 2.03 V             | 100                  | 33.4             | 13.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 111.2 PK                |                |             | 2.55 H             | 181                  | 109.5            | 1.7                      |
| 2                                                    | *5580.00        | 102.8 AV                |                |             | 2.55 H             | 181                  | 101.1            | 1.7                      |
| 3                                                    | 11166.00        | 49.2 PK                 | 74.0           | -24.8       | 2.25 H             | 72                   | 37.6             | 11.6                     |
| 4                                                    | 11166.00        | 37.1 AV                 | 54.0           | -16.9       | 2.25 H             | 72                   | 25.5             | 11.6                     |
| 5                                                    | #16749.00       | 48.2 PK                 | 68.2           | -20.0       | 1.25 H             | 119                  | 33.5             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 105.9 PK                |                |             | 3.84 V             | 69                   | 104.2            | 1.7                      |
| 2                                                    | *5580.00        | 96.4 AV                 |                |             | 3.84 V             | 69                   | 94.7             | 1.7                      |
| 3                                                    | 11166.00        | 47.5 PK                 | 74.0           | -26.5       | 1.31 V             | 127                  | 35.9             | 11.6                     |
| 4                                                    | 11166.00        | 35.9 AV                 | 54.0           | -18.1       | 1.31 V             | 127                  | 24.3             | 11.6                     |
| 5                                                    | #16749.00       | 47.0 PK                 | 68.2           | -21.2       | 2.00 V             | 61                   | 32.3             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 111.7 PK                |                |             | 2.60 H             | 176                  | 109.9            | 1.8                      |
| 2                                                    | *5700.00        | 102.9 AV                |                |             | 2.60 H             | 176                  | 101.1            | 1.8                      |
| 3                                                    | #5725.00        | 53.1 PK                 | 68.2           | -15.1       | 2.60 H             | 176                  | 51.2             | 1.9                      |
| 4                                                    | 11415.00        | 49.1 PK                 | 74.0           | -24.9       | 2.25 H             | 70                   | 36.3             | 12.8                     |
| 5                                                    | 11415.00        | 37.4 AV                 | 54.0           | -16.6       | 2.25 H             | 70                   | 24.6             | 12.8                     |
| 6                                                    | #17122.50       | 47.3 PK                 | 68.2           | -20.9       | 1.22 H             | 108                  | 31.1             | 16.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 106.1 PK                |                |             | 3.88 V             | 57                   | 104.3            | 1.8                      |
| 2                                                    | *5700.00        | 96.9 AV                 |                |             | 3.88 V             | 57                   | 95.1             | 1.8                      |
| 3                                                    | #5725.00        | 52.6 PK                 | 68.2           | -15.6       | 3.88 V             | 57                   | 50.7             | 1.9                      |
| 4                                                    | 11415.00        | 47.1 PK                 | 74.0           | -26.9       | 1.02 V             | 108                  | 34.3             | 12.8                     |
| 5                                                    | 11415.00        | 35.4 AV                 | 54.0           | -18.6       | 1.02 V             | 108                  | 22.6             | 12.8                     |
| 6                                                    | #17122.50       | 46.3 PK                 | 68.2           | -21.9       | 2.00 V             | 97                   | 30.1             | 16.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.9 PK                 | 74.0           | -22.1       | 2.53 H             | 177                  | 50.3             | 1.6                      |
| 2                                                    | 5460.00         | 40.1 AV                 | 54.0           | -13.9       | 2.53 H             | 177                  | 38.5             | 1.6                      |
| 3                                                    | #5470.00        | 53.2 PK                 | 68.2           | -15.0       | 2.53 H             | 177                  | 51.6             | 1.6                      |
| 4                                                    | *5720.00        | 110.8 PK                |                |             | 2.53 H             | 177                  | 108.9            | 1.9                      |
| 5                                                    | *5720.00        | 102.3 AV                |                |             | 2.53 H             | 177                  | 100.4            | 1.9                      |
| 6                                                    | #5850.00        | 51.9 PK                 | 68.2           | -16.3       | 2.53 H             | 177                  | 49.6             | 2.3                      |
| 7                                                    | 11455.00        | 49.5 PK                 | 74.0           | -24.5       | 2.27 H             | 58                   | 36.9             | 12.6                     |
| 8                                                    | 11455.00        | 37.5 AV                 | 54.0           | -16.5       | 2.27 H             | 58                   | 24.9             | 12.6                     |
| 9                                                    | #17182.50       | 47.4 PK                 | 68.2           | -20.8       | 1.21 H             | 108                  | 31.5             | 15.9                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5460.00         | 52.0 PK                 | 74.0           | -22.0       | 3.87 V             | 42                   | 50.4             | 1.6                      |
| 2                                                  | 5460.00         | 40.0 AV                 | 54.0           | -14.0       | 3.87 V             | 42                   | 38.4             | 1.6                      |
| 3                                                  | #5470.00        | 53.6 PK                 | 68.2           | -14.6       | 3.87 V             | 42                   | 52.0             | 1.6                      |
| 4                                                  | *5720.00        | 106.2 PK                |                |             | 3.87 V             | 42                   | 104.3            | 1.9                      |
| 5                                                  | *5720.00        | 97.1 AV                 |                |             | 3.87 V             | 42                   | 95.2             | 1.9                      |
| 6                                                  | #5850.00        | 52.5 PK                 | 68.2           | -15.7       | 3.87 V             | 42                   | 50.2             | 2.3                      |
| 7                                                  | 11455.00        | 47.3 PK                 | 74.0           | -26.7       | 1.11 V             | 104                  | 34.7             | 12.6                     |
| 8                                                  | 11455.00        | 35.6 AV                 | 54.0           | -18.4       | 1.11 V             | 104                  | 23.0             | 12.6                     |
| 9                                                  | #17182.50       | 46.5 PK                 | 68.2           | -21.7       | 2.07 V             | 80                   | 30.6             | 15.9                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5578.36        | 58.8 PK                 | 68.2           | -9.4        | 3.79 H             | 71                   | 57.1             | 1.7                      |
| 2                                                    | *5745.00        | 125.7 PK                |                |             | 3.79 H             | 71                   | 123.8            | 1.9                      |
| 3                                                    | *5745.00        | 118.0 AV                |                |             | 3.79 H             | 71                   | 116.1            | 1.9                      |
| 4                                                    | #5952.14        | 64.5 PK                 | 68.2           | -3.7        | 3.79 H             | 71                   | 62.0             | 2.5                      |
| 5                                                    | 11576.00        | 52.6 PK                 | 74.0           | -21.4       | 2.20 H             | 84                   | 39.7             | 12.9                     |
| 6                                                    | 11576.00        | 43.8 AV                 | 54.0           | -10.2       | 2.20 H             | 84                   | 30.9             | 12.9                     |
| 7                                                    | #17364.00       | 53.8 PK                 | 68.2           | -14.4       | 1.13 H             | 89                   | 36.9             | 16.9                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5578.51        | 55.0 PK                 | 68.2           | -13.2       | 2.51 V             | 181                  | 53.3             | 1.7                      |
| 2                                                  | *5745.00        | 119.0 PK                |                |             | 2.51 V             | 181                  | 117.1            | 1.9                      |
| 3                                                  | *5745.00        | 112.2 AV                |                |             | 2.51 V             | 181                  | 110.3            | 1.9                      |
| 4                                                  | #5969.46        | 53.5 PK                 | 68.2           | -14.7       | 2.51 V             | 181                  | 51.0             | 2.5                      |
| 5                                                  | 11576.00        | 55.3 PK                 | 74.0           | -18.7       | 1.19 V             | 84                   | 42.4             | 12.9                     |
| 6                                                  | 11576.00        | 44.9 AV                 | 54.0           | -9.1        | 1.19 V             | 84                   | 32.0             | 12.9                     |
| 7                                                  | #17364.00       | 58.7 PK                 | 68.2           | -9.5        | 2.05 V             | 98                   | 41.8             | 16.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5629.46        | 58.9 PK                 | 68.2           | -9.3        | 3.85 H             | 67                   | 57.2             | 1.7                      |
| 2                                                    | *5785.00        | 125.5 PK                |                |             | 3.85 H             | 67                   | 123.5            | 2.0                      |
| 3                                                    | *5785.00        | 117.9 AV                |                |             | 3.85 H             | 67                   | 115.9            | 2.0                      |
| 4                                                    | #5946.62        | 58.0 PK                 | 68.2           | -10.2       | 3.85 H             | 67                   | 55.5             | 2.5                      |
| 5                                                    | 11576.00        | 53.4 PK                 | 74.0           | -20.6       | 2.15 H             | 102                  | 40.5             | 12.9                     |
| 6                                                    | 11576.00        | 44.2 AV                 | 54.0           | -9.8        | 2.15 H             | 102                  | 31.3             | 12.9                     |
| 7                                                    | #17364.00       | 52.9 PK                 | 68.2           | -15.3       | 1.13 H             | 94                   | 36.0             | 16.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5627.27        | 54.6 PK                 | 68.2           | -13.6       | 2.58 V             | 172                  | 52.9             | 1.7                      |
| 2                                                    | *5785.00        | 118.5 PK                |                |             | 2.58 V             | 172                  | 116.5            | 2.0                      |
| 3                                                    | *5785.00        | 111.7 AV                |                |             | 2.58 V             | 172                  | 109.7            | 2.0                      |
| 4                                                    | #5947.60        | 56.4 PK                 | 68.2           | -11.8       | 2.58 V             | 172                  | 53.9             | 2.5                      |
| 5                                                    | 11576.00        | 56.0 PK                 | 74.0           | -18.0       | 1.18 V             | 78                   | 43.1             | 12.9                     |
| 6                                                    | 11576.00        | 45.3 AV                 | 54.0           | -8.7        | 1.18 V             | 78                   | 32.4             | 12.9                     |
| 7                                                    | #17364.00       | 58.7 PK                 | 68.2           | -9.5        | 2.05 V             | 88                   | 41.8             | 16.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5590.87        | 54.8 PK                 | 68.2           | -13.4       | 3.87 H             | 55                   | 53.2             | 1.6                      |
| 2                                                    | *5825.00        | 124.6 PK                |                |             | 3.87 H             | 55                   | 122.4            | 2.2                      |
| 3                                                    | *5825.00        | 117.4 AV                |                |             | 3.87 H             | 55                   | 115.2            | 2.2                      |
| 4                                                    | #5991.16        | 58.5 PK                 | 68.2           | -9.7        | 3.87 H             | 55                   | 55.9             | 2.6                      |
| 5                                                    | 11665.00        | 53.1 PK                 | 74.0           | -20.9       | 2.25 H             | 90                   | 40.2             | 12.9                     |
| 6                                                    | 11665.00        | 44.4 AV                 | 54.0           | -9.6        | 2.25 H             | 90                   | 31.5             | 12.9                     |
| 7                                                    | #17497.50       | 53.6 PK                 | 68.2           | -14.6       | 1.16 H             | 91                   | 34.6             | 19.0                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5592.54        | 51.5 PK                 | 68.2           | -16.7       | 2.48 V             | 170                  | 49.9             | 1.6                      |
| 2                                                  | *5825.00        | 118.9 PK                |                |             | 2.48 V             | 170                  | 116.7            | 2.2                      |
| 3                                                  | *5825.00        | 112.0 AV                |                |             | 2.48 V             | 170                  | 109.8            | 2.2                      |
| 4                                                  | #5991.43        | 54.9 PK                 | 68.2           | -13.3       | 2.48 V             | 170                  | 52.3             | 2.6                      |
| 5                                                  | 11665.00        | 54.8 PK                 | 74.0           | -19.2       | 1.18 V             | 89                   | 41.9             | 12.9                     |
| 6                                                  | 11665.00        | 44.5 AV                 | 54.0           | -9.5        | 1.18 V             | 89                   | 31.6             | 12.9                     |
| 7                                                  | #17497.50       | 58.7 PK                 | 68.2           | -9.5        | 2.01 V             | 109                  | 39.7             | 19.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

## 802.11ax (RU106)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.2 PK                 | 74.0           | -22.8       | 2.58 H             | 173                  | 49.5             | 1.7                      |
| 2                                                    | 5150.00         | 40.6 AV                 | 54.0           | -13.4       | 2.58 H             | 173                  | 38.9             | 1.7                      |
| 3                                                    | *5180.00        | 111.5 PK                |                |             | 2.58 H             | 173                  | 110.0            | 1.5                      |
| 4                                                    | *5180.00        | 100.5 AV                |                |             | 2.58 H             | 173                  | 99.0             | 1.5                      |
| 5                                                    | #10350.00       | 48.9 PK                 | 68.2           | -19.3       | 2.25 H             | 75                   | 37.8             | 11.1                     |
| 6                                                    | 15525.00        | 47.4 PK                 | 74.0           | -26.6       | 1.23 H             | 123                  | 35.7             | 11.7                     |
| 7                                                    | 15525.00        | 33.9 AV                 | 54.0           | -20.1       | 1.23 H             | 123                  | 22.2             | 11.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5140.00         | 54.2 PK                 | 74.0           | -19.8       | 3.80 V             | 57                   | 52.5             | 1.7                      |
| 2                                                  | 5140.00         | 40.0 AV                 | 54.0           | -14.0       | 3.80 V             | 57                   | 38.3             | 1.7                      |
| 3                                                  | *5180.00        | 104.8 PK                |                |             | 3.80 V             | 57                   | 103.3            | 1.5                      |
| 4                                                  | *5180.00        | 95.6 AV                 |                |             | 3.80 V             | 57                   | 94.1             | 1.5                      |
| 5                                                  | #10350.00       | 47.3 PK                 | 68.2           | -20.9       | 1.00 V             | 95                   | 36.2             | 11.1                     |
| 6                                                  | 15525.00        | 46.1 PK                 | 74.0           | -27.9       | 1.98 V             | 80                   | 34.4             | 11.7                     |
| 7                                                  | 15525.00        | 32.2 AV                 | 54.0           | -21.8       | 1.98 V             | 80                   | 20.5             | 11.7                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.2 PK                 | 74.0           | -22.8       | 2.58 H             | 169                  | 49.5             | 1.7                      |
| 2                                                    | 5150.00         | 40.8 AV                 | 54.0           | -13.2       | 2.58 H             | 169                  | 39.1             | 1.7                      |
| 3                                                    | *5200.00        | 110.9 PK                |                |             | 2.58 H             | 169                  | 109.5            | 1.4                      |
| 4                                                    | *5200.00        | 100.1 AV                |                |             | 2.58 H             | 169                  | 98.7             | 1.4                      |
| 5                                                    | #10390.00       | 49.4 PK                 | 68.2           | -18.8       | 2.21 H             | 74                   | 37.9             | 11.5                     |
| 6                                                    | 15585.00        | 47.3 PK                 | 74.0           | -26.7       | 1.29 H             | 121                  | 35.7             | 11.6                     |
| 7                                                    | 15585.00        | 33.4 AV                 | 54.0           | -20.6       | 1.29 H             | 121                  | 21.8             | 11.6                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 54.3 PK                 | 74.0           | -19.7       | 3.84 V             | 42                   | 52.6             | 1.7                      |
| 2                                                  | 5150.00         | 40.2 AV                 | 54.0           | -13.8       | 3.84 V             | 42                   | 38.5             | 1.7                      |
| 3                                                  | *5200.00        | 104.8 PK                |                |             | 3.84 V             | 42                   | 103.4            | 1.4                      |
| 4                                                  | *5200.00        | 95.9 AV                 |                |             | 3.84 V             | 42                   | 94.5             | 1.4                      |
| 5                                                  | #10390.00       | 47.8 PK                 | 68.2           | -20.4       | 1.06 V             | 96                   | 36.3             | 11.5                     |
| 6                                                  | 15585.00        | 46.4 PK                 | 74.0           | -27.6       | 2.06 V             | 94                   | 34.8             | 11.6                     |
| 7                                                  | 15585.00        | 32.5 AV                 | 54.0           | -21.5       | 2.06 V             | 94                   | 20.9             | 11.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.0 PK                 | 74.0           | -23.0       | 2.64 H             | 177                  | 49.3             | 1.7                      |
| 2                                                    | 5150.00         | 40.3 AV                 | 54.0           | -13.7       | 2.64 H             | 177                  | 38.6             | 1.7                      |
| 3                                                    | *5240.00        | 111.3 PK                |                |             | 2.64 H             | 177                  | 110.1            | 1.2                      |
| 4                                                    | *5240.00        | 100.0 AV                |                |             | 2.64 H             | 177                  | 98.8             | 1.2                      |
| 5                                                    | #10490.00       | 48.7 PK                 | 68.2           | -19.5       | 2.20 H             | 53                   | 37.3             | 11.4                     |
| 6                                                    | 15735.00        | 48.0 PK                 | 74.0           | -26.0       | 1.29 H             | 118                  | 37.0             | 11.0                     |
| 7                                                    | 15735.00        | 34.1 AV                 | 54.0           | -19.9       | 1.29 H             | 118                  | 23.1             | 11.0                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 53.7 PK                 | 74.0           | -20.3       | 3.79 V             | 67                   | 52.0             | 1.7                      |
| 2                                                  | 5150.00         | 39.7 AV                 | 54.0           | -14.3       | 3.79 V             | 67                   | 38.0             | 1.7                      |
| 3                                                  | *5240.00        | 104.6 PK                |                |             | 3.79 V             | 67                   | 103.4            | 1.2                      |
| 4                                                  | *5240.00        | 95.6 AV                 |                |             | 3.79 V             | 67                   | 94.4             | 1.2                      |
| 5                                                  | #10490.00       | 47.3 PK                 | 68.2           | -20.9       | 1.08 V             | 90                   | 35.9             | 11.4                     |
| 6                                                  | 15735.00        | 46.1 PK                 | 74.0           | -27.9       | 2.02 V             | 98                   | 35.1             | 11.0                     |
| 7                                                  | 15735.00        | 32.3 AV                 | 54.0           | -21.7       | 2.02 V             | 98                   | 21.3             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 111.4 PK                |                |             | 2.56 H             | 177                  | 110.2            | 1.2                      |
| 2                                                    | *5260.00        | 100.2 AV                |                |             | 2.56 H             | 177                  | 99.0             | 1.2                      |
| 3                                                    | 5350.00         | 51.6 PK                 | 74.0           | -22.4       | 2.56 H             | 177                  | 50.2             | 1.4                      |
| 4                                                    | 5350.00         | 40.7 AV                 | 54.0           | -13.3       | 2.56 H             | 177                  | 39.3             | 1.4                      |
| 5                                                    | #10510.00       | 49.1 PK                 | 68.2           | -19.1       | 2.28 H             | 75                   | 37.7             | 11.4                     |
| 6                                                    | 15765.00        | 47.9 PK                 | 74.0           | -26.1       | 1.24 H             | 98                   | 37.1             | 10.8                     |
| 7                                                    | 15765.00        | 34.4 AV                 | 54.0           | -19.6       | 1.24 H             | 98                   | 23.6             | 10.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 105.0 PK                |                |             | 3.75 V             | 72                   | 103.8            | 1.2                      |
| 2                                                    | *5260.00        | 95.5 AV                 |                |             | 3.75 V             | 72                   | 94.3             | 1.2                      |
| 3                                                    | 5350.00         | 54.0 PK                 | 74.0           | -20.0       | 3.75 V             | 72                   | 52.6             | 1.4                      |
| 4                                                    | 5350.00         | 39.6 AV                 | 54.0           | -14.4       | 3.75 V             | 72                   | 38.2             | 1.4                      |
| 5                                                    | #10510.00       | 47.3 PK                 | 68.2           | -20.9       | 1.11 V             | 94                   | 35.9             | 11.4                     |
| 6                                                    | 15765.00        | 46.6 PK                 | 74.0           | -27.4       | 1.99 V             | 88                   | 35.8             | 10.8                     |
| 7                                                    | 15765.00        | 33.0 AV                 | 54.0           | -21.0       | 1.99 V             | 88                   | 22.2             | 10.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>Channel</b>         | TX Channel 60 | <b>Detector Function</b> | Peak (PK)    |
| <b>Frequency Range</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 111.6 PK                |                |             | 2.55 H             | 161                  | 110.4            | 1.2                      |
| 2                                                    | *5300.00        | 100.3 AV                |                |             | 2.55 H             | 161                  | 99.1             | 1.2                      |
| 3                                                    | 5350.00         | 50.9 PK                 | 74.0           | -23.1       | 2.55 H             | 161                  | 49.5             | 1.4                      |
| 4                                                    | 5350.00         | 40.4 AV                 | 54.0           | -13.6       | 2.55 H             | 161                  | 39.0             | 1.4                      |
| 5                                                    | 10610.50        | 49.8 PK                 | 74.0           | -24.2       | 2.20 H             | 77                   | 38.0             | 11.8                     |
| 6                                                    | 10610.50        | 37.6 AV                 | 54.0           | -16.4       | 2.20 H             | 77                   | 25.8             | 11.8                     |
| 7                                                    | 15915.80        | 47.8 PK                 | 74.0           | -26.2       | 1.24 H             | 101                  | 37.1             | 10.7                     |
| 8                                                    | 15915.80        | 34.0 AV                 | 54.0           | -20.0       | 1.24 H             | 101                  | 23.3             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 104.8 PK                |                |             | 3.79 V             | 68                   | 103.6            | 1.2                      |
| 2                                                    | *5300.00        | 95.4 AV                 |                |             | 3.79 V             | 68                   | 94.2             | 1.2                      |
| 3                                                    | 5350.00         | 54.1 PK                 | 74.0           | -19.9       | 3.79 V             | 68                   | 52.7             | 1.4                      |
| 4                                                    | 5350.00         | 39.9 AV                 | 54.0           | -14.1       | 3.79 V             | 68                   | 38.5             | 1.4                      |
| 5                                                    | 10610.50        | 47.4 PK                 | 74.0           | -26.6       | 1.04 V             | 110                  | 35.6             | 11.8                     |
| 6                                                    | 10610.50        | 35.7 AV                 | 54.0           | -18.3       | 1.04 V             | 110                  | 23.9             | 11.8                     |
| 7                                                    | 15915.80        | 46.3 PK                 | 74.0           | -27.7       | 2.06 V             | 76                   | 35.6             | 10.7                     |
| 8                                                    | 15915.80        | 32.7 AV                 | 54.0           | -21.3       | 2.06 V             | 76                   | 22.0             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 64 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 109.4 PK                |                |             | 2.54 H             | 185                  | 108.0            | 1.4                      |
| 2                                                    | *5320.00        | 100.6 AV                |                |             | 2.54 H             | 185                  | 99.2             | 1.4                      |
| 3                                                    | 5350.00         | 51.1 PK                 | 74.0           | -22.9       | 2.54 H             | 185                  | 49.7             | 1.4                      |
| 4                                                    | 5350.00         | 40.0 AV                 | 54.0           | -14.0       | 2.54 H             | 185                  | 38.6             | 1.4                      |
| 5                                                    | 10650.00        | 48.5 PK                 | 74.0           | -25.5       | 2.27 H             | 61                   | 36.6             | 11.9                     |
| 6                                                    | 10650.00        | 36.7 AV                 | 54.0           | -17.3       | 2.27 H             | 61                   | 24.8             | 11.9                     |
| 7                                                    | 15975.00        | 47.3 PK                 | 74.0           | -26.7       | 1.28 H             | 118                  | 36.4             | 10.9                     |
| 8                                                    | 15975.00        | 33.6 AV                 | 54.0           | -20.4       | 1.28 H             | 118                  | 22.7             | 10.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 105.1 PK                |                |             | 3.77 V             | 51                   | 103.7            | 1.4                      |
| 2                                                    | *5320.00        | 95.8 AV                 |                |             | 3.77 V             | 51                   | 94.4             | 1.4                      |
| 3                                                    | 5350.00         | 53.8 PK                 | 74.0           | -20.2       | 3.77 V             | 51                   | 52.4             | 1.4                      |
| 4                                                    | 5350.00         | 39.4 AV                 | 54.0           | -14.6       | 3.77 V             | 51                   | 38.0             | 1.4                      |
| 5                                                    | 10650.00        | 47.1 PK                 | 74.0           | -26.9       | 1.24 V             | 110                  | 35.2             | 11.9                     |
| 6                                                    | 10650.00        | 35.6 AV                 | 54.0           | -18.4       | 1.24 V             | 110                  | 23.7             | 11.9                     |
| 7                                                    | 15975.00        | 47.2 PK                 | 74.0           | -26.8       | 2.06 V             | 60                   | 36.3             | 10.9                     |
| 8                                                    | 15975.00        | 32.7 AV                 | 54.0           | -21.3       | 2.06 V             | 60                   | 21.8             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5440.00         | 51.9 PK                 | 74.0           | -22.1       | 2.56 H             | 184                  | 50.3             | 1.6                      |
| 2                                                    | 5440.00         | 40.6 AV                 | 54.0           | -13.4       | 2.56 H             | 184                  | 39.0             | 1.6                      |
| 3                                                    | #5466.50        | 51.5 PK                 | 68.2           | -16.7       | 2.56 H             | 184                  | 49.9             | 1.6                      |
| 4                                                    | *5500.00        | 111.3 PK                |                |             | 2.56 H             | 184                  | 109.6            | 1.7                      |
| 5                                                    | *5500.00        | 101.0 AV                |                |             | 2.56 H             | 184                  | 99.3             | 1.7                      |
| 6                                                    | 10989.00        | 49.3 PK                 | 74.0           | -24.7       | 2.27 H             | 81                   | 37.1             | 12.2                     |
| 7                                                    | 10989.00        | 37.3 AV                 | 54.0           | -16.7       | 2.27 H             | 81                   | 25.1             | 12.2                     |
| 8                                                    | #16483.50       | 47.8 PK                 | 68.2           | -20.4       | 1.23 H             | 123                  | 34.5             | 13.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5458.00         | 51.9 PK                 | 74.0           | -22.1       | 3.82 V             | 50                   | 50.3             | 1.6                      |
| 2                                                    | 5458.00         | 39.8 AV                 | 54.0           | -14.2       | 3.82 V             | 50                   | 38.2             | 1.6                      |
| 3                                                    | #5470.00        | 57.5 PK                 | 68.2           | -10.7       | 3.82 V             | 50                   | 55.9             | 1.6                      |
| 4                                                    | *5500.00        | 105.3 PK                |                |             | 3.82 V             | 50                   | 103.6            | 1.7                      |
| 5                                                    | *5500.00        | 95.9 AV                 |                |             | 3.82 V             | 50                   | 94.2             | 1.7                      |
| 6                                                    | 10989.00        | 47.8 PK                 | 74.0           | -26.2       | 1.00 V             | 85                   | 35.6             | 12.2                     |
| 7                                                    | 10989.00        | 35.9 AV                 | 54.0           | -18.1       | 1.00 V             | 85                   | 23.7             | 12.2                     |
| 8                                                    | #16483.50       | 46.5 PK                 | 68.2           | -21.7       | 2.06 V             | 93                   | 33.2             | 13.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 111.6 PK                |                |             | 2.64 H             | 159                  | 109.9            | 1.7                      |
| 2                                                    | *5580.00        | 100.7 AV                |                |             | 2.64 H             | 159                  | 99.0             | 1.7                      |
| 3                                                    | 11150.00        | 49.1 PK                 | 74.0           | -24.9       | 2.27 H             | 55                   | 37.5             | 11.6                     |
| 4                                                    | 11150.00        | 37.5 AV                 | 54.0           | -16.5       | 2.27 H             | 55                   | 25.9             | 11.6                     |
| 5                                                    | #16725.00       | 47.6 PK                 | 68.2           | -20.6       | 1.30 H             | 119                  | 32.9             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 105.2 PK                |                |             | 3.80 V             | 46                   | 103.5            | 1.7                      |
| 2                                                    | *5580.00        | 96.1 AV                 |                |             | 3.80 V             | 46                   | 94.4             | 1.7                      |
| 3                                                    | 11150.00        | 47.7 PK                 | 74.0           | -26.3       | 1.07 V             | 101                  | 36.1             | 11.6                     |
| 4                                                    | 11150.00        | 35.7 AV                 | 54.0           | -18.3       | 1.07 V             | 101                  | 24.1             | 11.6                     |
| 5                                                    | #16725.00       | 46.4 PK                 | 68.2           | -21.8       | 2.06 V             | 94                   | 31.7             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 111.3 PK                |                |             | 2.54 H             | 187                  | 109.5            | 1.8                      |
| 2                                                    | *5700.00        | 100.5 AV                |                |             | 2.54 H             | 187                  | 98.7             | 1.8                      |
| 3                                                    | #5725.00        | 53.9 PK                 | 68.2           | -14.3       | 2.54 H             | 187                  | 52.0             | 1.9                      |
| 4                                                    | 11410.00        | 49.3 PK                 | 74.0           | -24.7       | 2.21 H             | 54                   | 36.5             | 12.8                     |
| 5                                                    | 11410.00        | 37.5 AV                 | 54.0           | -16.5       | 2.21 H             | 54                   | 24.7             | 12.8                     |
| 6                                                    | #17115.00       | 48.0 PK                 | 68.2           | -20.2       | 1.28 H             | 112                  | 31.8             | 16.2                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5700.00        | 104.6 PK                |                |             | 3.81 V             | 56                   | 102.8            | 1.8                      |
| 2                                                  | *5700.00        | 95.6 AV                 |                |             | 3.81 V             | 56                   | 93.8             | 1.8                      |
| 3                                                  | #5725.00        | 53.1 PK                 | 68.2           | -15.1       | 3.81 V             | 56                   | 51.2             | 1.9                      |
| 4                                                  | 11410.00        | 47.1 PK                 | 74.0           | -26.9       | 1.06 V             | 105                  | 34.3             | 12.8                     |
| 5                                                  | 11410.00        | 35.5 AV                 | 54.0           | -18.5       | 1.06 V             | 105                  | 22.7             | 12.8                     |
| 6                                                  | #17115.00       | 46.2 PK                 | 68.2           | -22.0       | 2.02 V             | 72                   | 30.0             | 16.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.8 PK                 | 74.0           | -22.2       | 2.53 H             | 173                  | 50.2             | 1.6                      |
| 2                                                    | 5460.00         | 39.8 AV                 | 54.0           | -14.2       | 2.53 H             | 173                  | 38.2             | 1.6                      |
| 3                                                    | #5470.00        | 52.9 PK                 | 68.2           | -15.3       | 2.53 H             | 173                  | 51.3             | 1.6                      |
| 4                                                    | *5720.00        | 111.1 PK                |                |             | 2.53 H             | 173                  | 109.2            | 1.9                      |
| 5                                                    | *5720.00        | 100.3 AV                |                |             | 2.53 H             | 173                  | 98.4             | 1.9                      |
| 6                                                    | #5850.00        | 51.7 PK                 | 68.2           | -16.5       | 2.53 H             | 173                  | 49.4             | 2.3                      |
| 7                                                    | 11450.00        | 48.6 PK                 | 74.0           | -25.4       | 2.21 H             | 54                   | 36.0             | 12.6                     |
| 8                                                    | 11450.00        | 36.7 AV                 | 54.0           | -17.3       | 2.21 H             | 54                   | 24.1             | 12.6                     |
| 9                                                    | #17175.00       | 47.5 PK                 | 68.2           | -20.7       | 1.24 H             | 118                  | 31.7             | 15.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5460.00         | 51.7 PK                 | 74.0           | -22.3       | 3.81 V             | 54                   | 50.1             | 1.6                      |
| 2                                                  | 5460.00         | 39.8 AV                 | 54.0           | -14.2       | 3.81 V             | 54                   | 38.2             | 1.6                      |
| 3                                                  | #5470.00        | 53.1 PK                 | 68.2           | -15.1       | 3.81 V             | 54                   | 51.5             | 1.6                      |
| 4                                                  | *5720.00        | 105.5 PK                |                |             | 3.81 V             | 54                   | 103.6            | 1.9                      |
| 5                                                  | *5720.00        | 96.0 AV                 |                |             | 3.81 V             | 54                   | 94.1             | 1.9                      |
| 6                                                  | #5850.00        | 51.5 PK                 | 68.2           | -16.7       | 3.81 V             | 54                   | 49.2             | 2.3                      |
| 7                                                  | 11450.00        | 47.2 PK                 | 74.0           | -26.8       | 1.05 V             | 107                  | 34.6             | 12.6                     |
| 8                                                  | 11450.00        | 35.6 AV                 | 54.0           | -18.4       | 1.05 V             | 107                  | 23.0             | 12.6                     |
| 9                                                  | #17175.00       | 46.3 PK                 | 68.2           | -21.9       | 2.03 V             | 97                   | 30.5             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5582.77        | 57.8 PK                 | 68.2           | -10.4       | 3.79 H             | 63                   | 56.1             | 1.7                      |
| 2                                                    | *5745.00        | 124.3 PK                |                |             | 3.79 H             | 63                   | 122.4            | 1.9                      |
| 3                                                    | *5745.00        | 115.7 AV                |                |             | 3.79 H             | 63                   | 113.8            | 1.9                      |
| 4                                                    | #5956.78        | 56.7 PK                 | 68.2           | -11.5       | 3.79 H             | 63                   | 54.2             | 2.5                      |
| 5                                                    | 11479.00        | 53.0 PK                 | 74.0           | -21.0       | 2.17 H             | 97                   | 40.5             | 12.5                     |
| 6                                                    | 11479.00        | 44.1 AV                 | 54.0           | -9.9        | 2.17 H             | 97                   | 31.6             | 12.5                     |
| 7                                                    | #17218.50       | 54.2 PK                 | 68.2           | -14.0       | 1.15 H             | 85                   | 38.4             | 15.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5580.92        | 54.9 PK                 | 68.2           | -13.3       | 2.63 V             | 187                  | 53.2             | 1.7                      |
| 2                                                  | *5745.00        | 119.4 PK                |                |             | 2.63 V             | 187                  | 117.5            | 1.9                      |
| 3                                                  | *5745.00        | 109.9 AV                |                |             | 2.63 V             | 187                  | 108.0            | 1.9                      |
| 4                                                  | #5983.19        | 52.6 PK                 | 68.2           | -15.6       | 2.63 V             | 187                  | 50.1             | 2.5                      |
| 5                                                  | 11479.00        | 55.1 PK                 | 74.0           | -18.9       | 1.17 V             | 74                   | 42.6             | 12.5                     |
| 6                                                  | 11479.00        | 44.9 AV                 | 54.0           | -9.1        | 1.17 V             | 74                   | 32.4             | 12.5                     |
| 7                                                  | #17218.50       | 59.5 PK                 | 68.2           | -8.7        | 2.04 V             | 87                   | 43.7             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5627.46        | 57.2 PK                 | 68.2           | -11.0       | 3.86 H             | 41                   | 55.5             | 1.7                      |
| 2                                                    | *5785.00        | 123.8 PK                |                |             | 3.86 H             | 41                   | 121.8            | 2.0                      |
| 3                                                    | *5785.00        | 115.5 AV                |                |             | 3.86 H             | 41                   | 113.5            | 2.0                      |
| 4                                                    | #5948.79        | 57.9 PK                 | 68.2           | -10.3       | 3.86 H             | 41                   | 55.4             | 2.5                      |
| 5                                                    | 11580.50        | 53.0 PK                 | 74.0           | -21.0       | 2.18 H             | 93                   | 40.2             | 12.8                     |
| 6                                                    | 11580.50        | 44.2 AV                 | 54.0           | -9.8        | 2.18 H             | 93                   | 31.4             | 12.8                     |
| 7                                                    | #17370.75       | 53.8 PK                 | 68.2           | -14.4       | 1.09 H             | 96                   | 36.8             | 17.0                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5631.63        | 54.5 PK                 | 68.2           | -13.7       | 2.59 V             | 172                  | 52.8             | 1.7                      |
| 2                                                  | *5785.00        | 117.8 PK                |                |             | 2.59 V             | 172                  | 115.8            | 2.0                      |
| 3                                                  | *5785.00        | 109.4 AV                |                |             | 2.59 V             | 172                  | 107.4            | 2.0                      |
| 4                                                  | #5950.77        | 55.3 PK                 | 68.2           | -12.9       | 2.59 V             | 172                  | 52.8             | 2.5                      |
| 5                                                  | 11580.50        | 55.6 PK                 | 74.0           | -18.4       | 1.24 V             | 89                   | 42.8             | 12.8                     |
| 6                                                  | 11580.50        | 45.3 AV                 | 54.0           | -8.7        | 1.24 V             | 89                   | 32.5             | 12.8                     |
| 7                                                  | #17370.75       | 59.0 PK                 | 68.2           | -9.2        | 2.04 V             | 99                   | 42.0             | 17.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5586.62        | 55.9 PK                 | 68.2           | -12.3       | 3.78 H             | 72                   | 54.2             | 1.7                      |
| 2                                                    | *5825.00        | 122.8 PK                |                |             | 3.78 H             | 72                   | 120.6            | 2.2                      |
| 3                                                    | *5825.00        | 114.9 AV                |                |             | 3.78 H             | 72                   | 112.7            | 2.2                      |
| 4                                                    | #5983.46        | 57.7 PK                 | 68.2           | -10.5       | 3.78 H             | 72                   | 55.2             | 2.5                      |
| 5                                                    | 11660.50        | 53.1 PK                 | 74.0           | -20.9       | 2.20 H             | 99                   | 40.2             | 12.9                     |
| 6                                                    | 11660.50        | 44.1 AV                 | 54.0           | -9.9        | 2.20 H             | 99                   | 31.2             | 12.9                     |
| 7                                                    | #17490.75       | 53.7 PK                 | 68.2           | -14.5       | 1.14 H             | 81                   | 34.7             | 19.0                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5588.01        | 51.8 PK                 | 68.2           | -16.4       | 2.59 V             | 171                  | 50.1             | 1.7                      |
| 2                                                  | *5825.00        | 119.0 PK                |                |             | 2.59 V             | 171                  | 116.8            | 2.2                      |
| 3                                                  | *5825.00        | 109.5 AV                |                |             | 2.59 V             | 171                  | 107.3            | 2.2                      |
| 4                                                  | #5989.93        | 54.2 PK                 | 68.2           | -14.0       | 2.59 V             | 171                  | 51.7             | 2.5                      |
| 5                                                  | 11660.50        | 54.8 PK                 | 74.0           | -19.2       | 1.18 V             | 98                   | 41.9             | 12.9                     |
| 6                                                  | 11660.50        | 44.6 AV                 | 54.0           | -9.4        | 1.18 V             | 98                   | 31.7             | 12.9                     |
| 7                                                  | #17490.75       | 58.4 PK                 | 68.2           | -9.8        | 2.06 V             | 101                  | 39.4             | 19.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

# Below 1GHz Data:


## 802.11ax (HE20)

|                 |                |                      |                 |
|-----------------|----------------|----------------------|-----------------|
| CHANNEL         | TX Channel 149 | DETECTOR<br>FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz ~ 1GHz    |                      |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 99.80          | 38.3 QP                       | 43.5              | -5.2           | 3.03 H                   | 355                        | 55.3                   | -17.0                          |
| 2                                                   | 157.90         | 38.3 QP                       | 43.5              | -5.2           | 2.00 H                   | 248                        | 50.7                   | -12.4                          |
| 3                                                   | 199.60         | 37.0 QP                       | 43.5              | -6.5           | 1.08 H                   | 243                        | 53.1                   | -16.1                          |
| 4                                                   | 287.50         | 40.8 QP                       | 46.0              | -5.2           | 1.04 H                   | 343                        | 53.0                   | -12.2                          |
| 5                                                   | 391.00         | 37.3 QP                       | 46.0              | -8.7           | 1.05 H                   | 137                        | 47.1                   | -9.8                           |
| 6                                                   | 666.20         | 37.8 QP                       | 46.0              | -8.2           | 1.19 H                   | 248                        | 41.9                   | -4.1                           |

### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

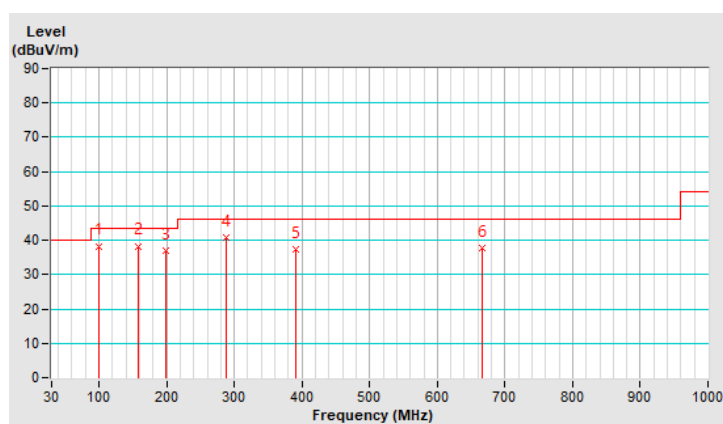




|                        |                |                              |                 |
|------------------------|----------------|------------------------------|-----------------|
| <b>CHANNEL</b>         | TX Channel 149 | <b>DETECTOR<br/>FUNCTION</b> | Quasi-Peak (QP) |
| <b>FREQUENCY RANGE</b> | 9kHz ~ 1GHz    |                              |                 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 100.30         | 31.9 QP                       | 43.5              | -11.6          | 3.85 V                   | 109                        | 48.9                   | -17.0                          |
| 2                                                 | 159.70         | 29.1 QP                       | 43.5              | -14.4          | 2.05 V                   | 127                        | 41.5                   | -12.4                          |
| 3                                                 | 298.60         | 36.1 QP                       | 46.0              | -9.9           | 2.09 V                   | 273                        | 48.1                   | -12.0                          |
| 4                                                 | 424.00         | 31.3 QP                       | 46.0              | -14.7          | 1.17 V                   | 320                        | 40.1                   | -8.8                           |
| 5                                                 | 666.30         | 34.8 QP                       | 46.0              | -11.2          | 1.16 V                   | 293                        | 38.9                   | -4.1                           |
| 6                                                 | 696.90         | 34.1 QP                       | 46.0              | -11.9          | 1.95 V                   | 234                        | 37.7                   | -3.6                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

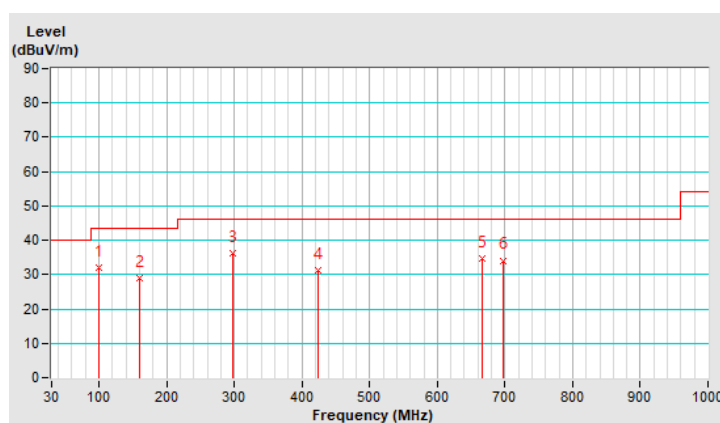

#### 4.1.8 Test Results (Mode 2)

##### Dipole Antenna

##### Above 1GHz Data:

##### 802.11a

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 62.2 PK                 | 74.0           | -11.8       | 1.00 H             | 218                  | 60.5             | 1.7                      |
| 2                                                    | 5150.00         | 48.5 AV                 | 54.0           | -5.5        | 1.00 H             | 218                  | 46.8             | 1.7                      |
| 3                                                    | *5180.00        | 108.5 PK                |                |             | 1.00 H             | 218                  | 107.0            | 1.5                      |
| 4                                                    | *5180.00        | 98.6 AV                 |                |             | 1.00 H             | 218                  | 97.1             | 1.5                      |
| 5                                                    | #10360.00       | 49.2 PK                 | 68.2           | -19.0       | 3.27 H             | 56                   | 38.0             | 11.2                     |
| 6                                                    | 15540.00        | 55.0 PK                 | 74.0           | -19.0       | 1.21 H             | 32                   | 43.3             | 11.7                     |
| 7                                                    | 15540.00        | 44.4 AV                 | 54.0           | -9.6        | 1.21 H             | 32                   | 32.7             | 11.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 66.1 PK                 | 74.0           | -7.9        | 2.03 V             | 351                  | 64.4             | 1.7                      |
| 2                                                    | 5150.00         | 51.5 AV                 | 54.0           | -2.5        | 2.03 V             | 351                  | 49.8             | 1.7                      |
| 3                                                    | *5180.00        | 113.2 PK                |                |             | 2.03 V             | 351                  | 111.7            | 1.5                      |
| 4                                                    | *5180.00        | 103.2 AV                |                |             | 2.03 V             | 351                  | 101.7            | 1.5                      |
| 5                                                    | #10360.00       | 49.4 PK                 | 68.2           | -18.8       | 1.53 V             | 200                  | 38.2             | 11.2                     |
| 6                                                    | 15540.00        | 55.6 PK                 | 74.0           | -18.4       | 1.37 V             | 50                   | 43.9             | 11.7                     |
| 7                                                    | 15540.00        | 44.2 AV                 | 54.0           | -9.8        | 1.37 V             | 50                   | 32.5             | 11.7                     |

##### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 56.0 PK                 | 74.0           | -18.0       | 1.01 H             | 210                  | 54.3             | 1.7                      |
| 2                                                    | 5150.00         | 42.5 AV                 | 54.0           | -11.5       | 1.01 H             | 210                  | 40.8             | 1.7                      |
| 3                                                    | *5200.00        | 109.6 PK                |                |             | 1.01 H             | 210                  | 108.2            | 1.4                      |
| 4                                                    | *5200.00        | 99.8 AV                 |                |             | 1.01 H             | 210                  | 98.4             | 1.4                      |
| 5                                                    | #10400.00       | 48.6 PK                 | 68.2           | -19.6       | 3.23 H             | 55                   | 37.1             | 11.5                     |
| 6                                                    | 15600.00        | 55.6 PK                 | 74.0           | -18.4       | 1.23 H             | 41                   | 44.1             | 11.5                     |
| 7                                                    | 15600.00        | 44.9 AV                 | 54.0           | -9.1        | 1.23 H             | 41                   | 33.4             | 11.5                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 58.6 PK                 | 74.0           | -15.4       | 1.95 V             | 316                  | 56.9             | 1.7                      |
| 2                                                  | 5150.00         | 44.1 AV                 | 54.0           | -9.9        | 1.95 V             | 316                  | 42.4             | 1.7                      |
| 3                                                  | *5200.00        | 113.8 PK                |                |             | 1.95 V             | 316                  | 112.4            | 1.4                      |
| 4                                                  | *5200.00        | 104.3 AV                |                |             | 1.95 V             | 316                  | 102.9            | 1.4                      |
| 5                                                  | #10400.00       | 49.4 PK                 | 68.2           | -18.8       | 1.52 V             | 212                  | 37.9             | 11.5                     |
| 6                                                  | 15600.00        | 55.3 PK                 | 74.0           | -18.7       | 1.33 V             | 64                   | 43.8             | 11.5                     |
| 7                                                  | 15600.00        | 44.0 AV                 | 54.0           | -10.0       | 1.33 V             | 64                   | 32.5             | 11.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.3 PK                 | 74.0           | -22.7       | 1.01 H             | 211                  | 49.6             | 1.7                      |
| 2                                                    | 5150.00         | 40.2 AV                 | 54.0           | -13.8       | 1.01 H             | 211                  | 38.5             | 1.7                      |
| 3                                                    | *5240.00        | 109.2 PK                |                |             | 1.01 H             | 211                  | 108.0            | 1.2                      |
| 4                                                    | *5240.00        | 99.6 AV                 |                |             | 1.01 H             | 211                  | 98.4             | 1.2                      |
| 5                                                    | 5350.00         | 51.0 PK                 | 74.0           | -23.0       | 1.01 H             | 211                  | 49.6             | 1.4                      |
| 6                                                    | 5350.00         | 39.6 AV                 | 54.0           | -14.4       | 1.01 H             | 211                  | 38.2             | 1.4                      |
| 7                                                    | #10480.00       | 48.6 PK                 | 68.2           | -19.6       | 3.31 H             | 68                   | 37.1             | 11.5                     |
| 8                                                    | 15720.00        | 54.7 PK                 | 74.0           | -19.3       | 1.24 H             | 43                   | 43.6             | 11.1                     |
| 9                                                    | 15720.00        | 44.1 AV                 | 54.0           | -9.9        | 1.24 H             | 43                   | 33.0             | 11.1                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 51.5 PK                 | 74.0           | -22.5       | 1.94 V             | 310                  | 49.8             | 1.7                      |
| 2                                                  | 5150.00         | 40.1 AV                 | 54.0           | -13.9       | 1.94 V             | 310                  | 38.4             | 1.7                      |
| 3                                                  | *5240.00        | 114.3 PK                |                |             | 1.94 V             | 310                  | 113.1            | 1.2                      |
| 4                                                  | *5240.00        | 104.2 AV                |                |             | 1.94 V             | 310                  | 103.0            | 1.2                      |
| 5                                                  | 5350.00         | 52.0 PK                 | 74.0           | -22.0       | 1.94 V             | 310                  | 50.6             | 1.4                      |
| 6                                                  | 5350.00         | 40.2 AV                 | 54.0           | -13.8       | 1.94 V             | 310                  | 38.8             | 1.4                      |
| 7                                                  | #10480.00       | 48.9 PK                 | 68.2           | -19.3       | 1.53 V             | 209                  | 37.4             | 11.5                     |
| 8                                                  | 15720.00        | 55.5 PK                 | 74.0           | -18.5       | 1.33 V             | 58                   | 44.4             | 11.1                     |
| 9                                                  | 15720.00        | 44.4 AV                 | 54.0           | -9.6        | 1.33 V             | 58                   | 33.3             | 11.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 108.9 PK                |                |             | 1.03 H             | 216                  | 107.7            | 1.2                      |
| 2                                                    | *5260.00        | 99.3 AV                 |                |             | 1.03 H             | 216                  | 98.1             | 1.2                      |
| 3                                                    | 5350.00         | 51.1 PK                 | 74.0           | -22.9       | 1.03 H             | 216                  | 49.7             | 1.4                      |
| 4                                                    | 5350.00         | 40.2 AV                 | 54.0           | -13.8       | 1.03 H             | 216                  | 38.8             | 1.4                      |
| 5                                                    | #10520.00       | 49.1 PK                 | 68.2           | -19.1       | 3.24 H             | 40                   | 37.7             | 11.4                     |
| 6                                                    | 15780.00        | 55.6 PK                 | 74.0           | -18.4       | 1.17 H             | 20                   | 44.9             | 10.7                     |
| 7                                                    | 15780.00        | 44.8 AV                 | 54.0           | -9.2        | 1.17 H             | 20                   | 34.1             | 10.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5260.00        | 114.1 PK                |                |             | 2.13 V             | 312                  | 112.9            | 1.2                      |
| 2                                                  | *5260.00        | 104.1 AV                |                |             | 2.13 V             | 312                  | 102.9            | 1.2                      |
| 3                                                  | 5350.00         | 51.6 PK                 | 74.0           | -22.4       | 2.13 V             | 312                  | 50.2             | 1.4                      |
| 4                                                  | 5350.00         | 39.8 AV                 | 54.0           | -14.2       | 2.13 V             | 312                  | 38.4             | 1.4                      |
| 5                                                  | #10520.00       | 49.3 PK                 | 68.2           | -18.9       | 1.52 V             | 203                  | 37.9             | 11.4                     |
| 6                                                  | 15780.00        | 55.6 PK                 | 74.0           | -18.4       | 1.35 V             | 46                   | 44.9             | 10.7                     |
| 7                                                  | 15780.00        | 44.3 AV                 | 54.0           | -9.7        | 1.35 V             | 46                   | 33.6             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 60 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 109.4 PK                |                |             | 1.00 H             | 221                  | 108.2            | 1.2                      |
| 2                                                    | *5300.00        | 99.9 AV                 |                |             | 1.00 H             | 221                  | 98.7             | 1.2                      |
| 3                                                    | 5350.00         | 56.4 PK                 | 74.0           | -17.6       | 1.00 H             | 221                  | 55.0             | 1.4                      |
| 4                                                    | 5350.00         | 43.1 AV                 | 54.0           | -10.9       | 1.00 H             | 221                  | 41.7             | 1.4                      |
| 5                                                    | 10600.00        | 48.8 PK                 | 74.0           | -25.2       | 3.22 H             | 35                   | 37.0             | 11.8                     |
| 6                                                    | 10600.00        | 39.0 AV                 | 54.0           | -15.0       | 3.22 H             | 35                   | 27.2             | 11.8                     |
| 7                                                    | 15900.00        | 56.0 PK                 | 74.0           | -18.0       | 1.21 H             | 24                   | 45.3             | 10.7                     |
| 8                                                    | 15900.00        | 45.1 AV                 | 54.0           | -8.9        | 1.21 H             | 24                   | 34.4             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 113.9 PK                |                |             | 2.20 V             | 305                  | 112.7            | 1.2                      |
| 2                                                    | *5300.00        | 104.0 AV                |                |             | 2.20 V             | 305                  | 102.8            | 1.2                      |
| 3                                                    | 5350.00         | 58.6 PK                 | 74.0           | -15.4       | 2.20 V             | 305                  | 57.2             | 1.4                      |
| 4                                                    | 5350.00         | 42.6 AV                 | 54.0           | -11.4       | 2.20 V             | 305                  | 41.2             | 1.4                      |
| 5                                                    | 10600.00        | 49.7 PK                 | 74.0           | -24.3       | 1.49 V             | 203                  | 37.9             | 11.8                     |
| 6                                                    | 10600.00        | 40.2 AV                 | 54.0           | -13.8       | 1.49 V             | 203                  | 28.4             | 11.8                     |
| 7                                                    | 15900.00        | 55.4 PK                 | 74.0           | -18.6       | 1.42 V             | 56                   | 44.7             | 10.7                     |
| 8                                                    | 15900.00        | 44.3 AV                 | 54.0           | -9.7        | 1.42 V             | 56                   | 33.6             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 64 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 108.3 PK                |                |             | 1.05 H             | 220                  | 106.9            | 1.4                      |
| 2                                                    | *5320.00        | 99.6 AV                 |                |             | 1.05 H             | 220                  | 98.2             | 1.4                      |
| 3                                                    | 5350.00         | 60.3 PK                 | 74.0           | -13.7       | 1.05 H             | 220                  | 58.9             | 1.4                      |
| 4                                                    | 5350.00         | 47.1 AV                 | 54.0           | -6.9        | 1.05 H             | 220                  | 45.7             | 1.4                      |
| 5                                                    | 10640.00        | 49.0 PK                 | 74.0           | -25.0       | 3.32 H             | 57                   | 37.1             | 11.9                     |
| 6                                                    | 10640.00        | 39.4 AV                 | 54.0           | -14.6       | 3.32 H             | 57                   | 27.5             | 11.9                     |
| 7                                                    | 15960.00        | 55.2 PK                 | 74.0           | -18.8       | 1.17 H             | 24                   | 44.3             | 10.9                     |
| 8                                                    | 15960.00        | 44.4 AV                 | 54.0           | -9.6        | 1.17 H             | 24                   | 33.5             | 10.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 114.5 PK                |                |             | 1.94 V             | 306                  | 113.1            | 1.4                      |
| 2                                                    | *5320.00        | 104.5 AV                |                |             | 1.94 V             | 306                  | 103.1            | 1.4                      |
| 3                                                    | 5350.00         | 66.8 PK                 | 74.0           | -7.2        | 1.94 V             | 306                  | 65.4             | 1.4                      |
| 4                                                    | 5350.00         | 51.4 AV                 | 54.0           | -2.6        | 1.94 V             | 306                  | 50.0             | 1.4                      |
| 5                                                    | 10640.00        | 48.9 PK                 | 74.0           | -25.1       | 1.58 V             | 216                  | 37.0             | 11.9                     |
| 6                                                    | 10640.00        | 39.9 AV                 | 54.0           | -14.1       | 1.58 V             | 216                  | 28.0             | 11.9                     |
| 7                                                    | 15960.00        | 55.9 PK                 | 74.0           | -18.1       | 1.35 V             | 64                   | 45.0             | 10.9                     |
| 8                                                    | 15960.00        | 44.5 AV                 | 54.0           | -9.5        | 1.35 V             | 64                   | 33.6             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5456.76         | 55.6 PK                 | 74.0           | -18.4       | 3.75 H             | 229                  | 54.0             | 1.6                      |
| 2                                                    | 5456.76         | 41.0 AV                 | 54.0           | -13.0       | 3.75 H             | 229                  | 39.4             | 1.6                      |
| 3                                                    | #5467.64        | 59.6 PK                 | 68.2           | -8.6        | 3.75 H             | 229                  | 58.0             | 1.6                      |
| 4                                                    | *5500.00        | 108.1 PK                |                |             | 3.75 H             | 229                  | 106.4            | 1.7                      |
| 5                                                    | *5500.00        | 98.5 AV                 |                |             | 3.75 H             | 229                  | 96.8             | 1.7                      |
| 6                                                    | 11000.00        | 48.8 PK                 | 74.0           | -25.2       | 3.21 H             | 67                   | 36.6             | 12.2                     |
| 7                                                    | 11000.00        | 39.3 AV                 | 54.0           | -14.7       | 3.21 H             | 67                   | 27.1             | 12.2                     |
| 8                                                    | #16500.00       | 55.1 PK                 | 68.2           | -13.1       | 1.17 H             | 37                   | 41.7             | 13.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 59.8 PK                 | 74.0           | -14.2       | 1.80 V             | 13                   | 58.2             | 1.6                      |
| 2                                                    | 5460.00         | 44.4 AV                 | 54.0           | -9.6        | 1.80 V             | 13                   | 42.8             | 1.6                      |
| 3                                                    | #5468.32        | 66.1 PK                 | 68.2           | -2.1        | 1.80 V             | 13                   | 64.5             | 1.6                      |
| 4                                                    | *5500.00        | 113.3 PK                |                |             | 1.80 V             | 13                   | 111.6            | 1.7                      |
| 5                                                    | *5500.00        | 103.7 AV                |                |             | 1.80 V             | 13                   | 102.0            | 1.7                      |
| 6                                                    | 11000.00        | 50.4 PK                 | 74.0           | -23.6       | 1.59 V             | 203                  | 38.2             | 12.2                     |
| 7                                                    | 11000.00        | 41.1 AV                 | 54.0           | -12.9       | 1.59 V             | 203                  | 28.9             | 12.2                     |
| 8                                                    | #16500.00       | 56.1 PK                 | 68.2           | -12.1       | 1.29 V             | 57                   | 42.7             | 13.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 109.0 PK                |                |             | 1.00 H             | 227                  | 107.3            | 1.7                      |
| 2                                                    | *5580.00        | 99.7 AV                 |                |             | 1.00 H             | 227                  | 98.0             | 1.7                      |
| 3                                                    | 11160.00        | 49.1 PK                 | 74.0           | -24.9       | 3.29 H             | 43                   | 37.5             | 11.6                     |
| 4                                                    | 11160.00        | 39.1 AV                 | 54.0           | -14.9       | 3.29 H             | 43                   | 27.5             | 11.6                     |
| 5                                                    | #16740.00       | 55.7 PK                 | 68.2           | -12.5       | 1.23 H             | 37                   | 41.0             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 114.2 PK                |                |             | 1.69 V             | 8                    | 112.5            | 1.7                      |
| 2                                                    | *5580.00        | 104.5 AV                |                |             | 1.69 V             | 8                    | 102.8            | 1.7                      |
| 3                                                    | 11160.00        | 49.6 PK                 | 74.0           | -24.4       | 1.48 V             | 189                  | 38.0             | 11.6                     |
| 4                                                    | 11160.00        | 40.3 AV                 | 54.0           | -13.7       | 1.48 V             | 189                  | 28.7             | 11.6                     |
| 5                                                    | #16740.00       | 55.4 PK                 | 68.2           | -12.8       | 1.33 V             | 49                   | 40.7             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 105.6 PK                |                |             | 1.21 H             | 232                  | 103.8            | 1.8                      |
| 2                                                    | *5700.00        | 96.1 AV                 |                |             | 1.21 H             | 232                  | 94.3             | 1.8                      |
| 3                                                    | #5725.00        | 63.0 PK                 | 68.2           | -5.2        | 1.21 H             | 232                  | 61.1             | 1.9                      |
| 4                                                    | 11400.00        | 49.8 PK                 | 74.0           | -24.2       | 3.23 H             | 56                   | 37.0             | 12.8                     |
| 5                                                    | 11400.00        | 39.8 AV                 | 54.0           | -14.2       | 3.23 H             | 56                   | 27.0             | 12.8                     |
| 6                                                    | #17100.00       | 55.3 PK                 | 68.2           | -12.9       | 1.21 H             | 47                   | 39.0             | 16.3                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5700.00        | 110.8 PK                |                |             | 1.70 V             | 329                  | 109.0            | 1.8                      |
| 2                                                  | *5700.00        | 101.0 AV                |                |             | 1.70 V             | 329                  | 99.2             | 1.8                      |
| 3                                                  | #5725.00        | 66.0 PK                 | 68.2           | -2.2        | 1.70 V             | 329                  | 64.1             | 1.9                      |
| 4                                                  | 11400.00        | 50.2 PK                 | 74.0           | -23.8       | 1.56 V             | 212                  | 37.4             | 12.8                     |
| 5                                                  | 11400.00        | 40.5 AV                 | 54.0           | -13.5       | 1.56 V             | 212                  | 27.7             | 12.8                     |
| 6                                                  | #17100.00       | 56.3 PK                 | 68.2           | -11.9       | 1.36 V             | 62                   | 40.0             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.7 PK                 | 74.0           | -22.3       | 1.05 H             | 216                  | 50.1             | 1.6                      |
| 2                                                    | 5460.00         | 39.4 AV                 | 54.0           | -14.6       | 1.05 H             | 216                  | 37.8             | 1.6                      |
| 3                                                    | #5470.00        | 52.4 PK                 | 68.2           | -15.8       | 1.05 H             | 216                  | 50.8             | 1.6                      |
| 4                                                    | *5720.00        | 109.3 PK                |                |             | 1.05 H             | 216                  | 107.4            | 1.9                      |
| 5                                                    | *5720.00        | 99.8 AV                 |                |             | 1.05 H             | 216                  | 97.9             | 1.9                      |
| 6                                                    | #5850.00        | 51.8 PK                 | 68.2           | -16.4       | 1.05 H             | 216                  | 49.5             | 2.3                      |
| 7                                                    | 11440.00        | 49.1 PK                 | 74.0           | -24.9       | 3.32 H             | 43                   | 36.5             | 12.6                     |
| 8                                                    | 11440.00        | 39.3 AV                 | 54.0           | -14.7       | 3.32 H             | 43                   | 26.7             | 12.6                     |
| 9                                                    | #17160.00       | 55.0 PK                 | 68.2           | -13.2       | 1.22 H             | 44                   | 39.1             | 15.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.2 PK                 | 74.0           | -22.8       | 1.68 V             | 358                  | 49.6             | 1.6                      |
| 2                                                    | 5460.00         | 40.0 AV                 | 54.0           | -14.0       | 1.68 V             | 358                  | 38.4             | 1.6                      |
| 3                                                    | #5470.00        | 52.6 PK                 | 68.2           | -15.6       | 1.68 V             | 358                  | 51.0             | 1.6                      |
| 4                                                    | *5720.00        | 113.9 PK                |                |             | 1.68 V             | 358                  | 112.0            | 1.9                      |
| 5                                                    | *5720.00        | 104.2 AV                |                |             | 1.68 V             | 358                  | 102.3            | 1.9                      |
| 6                                                    | #5850.00        | 52.3 PK                 | 68.2           | -15.9       | 1.68 V             | 358                  | 50.0             | 2.3                      |
| 7                                                    | 11440.00        | 49.4 PK                 | 74.0           | -24.6       | 1.49 V             | 196                  | 36.8             | 12.6                     |
| 8                                                    | 11440.00        | 40.0 AV                 | 54.0           | -14.0       | 1.49 V             | 196                  | 27.4             | 12.6                     |
| 9                                                    | #17160.00       | 56.2 PK                 | 68.2           | -12.0       | 1.41 V             | 36                   | 40.3             | 15.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5745.00        | 110.3 PK                |                |             | 2.97 H             | 232                  | 108.4            | 1.9                      |
| 2                                                    | *5745.00        | 100.1 AV                |                |             | 2.97 H             | 232                  | 98.2             | 1.9                      |
| 3                                                    | 11490.00        | 49.4 PK                 | 74.0           | -24.6       | 3.31 H             | 50                   | 36.9             | 12.5                     |
| 4                                                    | 11490.00        | 39.6 AV                 | 54.0           | -14.4       | 3.31 H             | 50                   | 27.1             | 12.5                     |
| 5                                                    | #17235.00       | 54.8 PK                 | 68.2           | -13.4       | 1.21 H             | 39                   | 39.0             | 15.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5745.00        | 114.2 PK                |                |             | 1.76 V             | 360                  | 112.3            | 1.9                      |
| 2                                                    | *5745.00        | 104.5 AV                |                |             | 1.76 V             | 360                  | 102.6            | 1.9                      |
| 3                                                    | 11490.00        | 50.4 PK                 | 74.0           | -23.6       | 1.59 V             | 219                  | 37.9             | 12.5                     |
| 4                                                    | 11490.00        | 41.2 AV                 | 54.0           | -12.8       | 1.59 V             | 219                  | 28.7             | 12.5                     |
| 5                                                    | #17235.00       | 56.3 PK                 | 68.2           | -11.9       | 1.31 V             | 60                   | 40.5             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5785.00        | 110.5 PK                |                |             | 2.94 H             | 230                  | 108.5            | 2.0                      |
| 2                                                    | *5785.00        | 100.2 AV                |                |             | 2.94 H             | 230                  | 98.2             | 2.0                      |
| 3                                                    | 11570.00        | 49.4 PK                 | 74.0           | -24.6       | 3.28 H             | 69                   | 36.5             | 12.9                     |
| 4                                                    | 11570.00        | 39.5 AV                 | 54.0           | -14.5       | 3.28 H             | 69                   | 26.6             | 12.9                     |
| 5                                                    | #17355.00       | 55.1 PK                 | 68.2           | -13.1       | 1.26 H             | 44                   | 38.3             | 16.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5785.00        | 114.5 PK                |                |             | 1.60 V             | 356                  | 112.5            | 2.0                      |
| 2                                                    | *5785.00        | 104.6 AV                |                |             | 1.60 V             | 356                  | 102.6            | 2.0                      |
| 3                                                    | 11570.00        | 49.3 PK                 | 74.0           | -24.7       | 1.50 V             | 215                  | 36.4             | 12.9                     |
| 4                                                    | 11570.00        | 40.1 AV                 | 54.0           | -13.9       | 1.50 V             | 215                  | 27.2             | 12.9                     |
| 5                                                    | #17355.00       | 55.3 PK                 | 68.2           | -12.9       | 1.32 V             | 38                   | 38.5             | 16.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5825.00        | 110.3 PK                |                |             | 2.90 H             | 238                  | 108.1            | 2.2                      |
| 2                                                    | *5825.00        | 100.2 AV                |                |             | 2.90 H             | 238                  | 98.0             | 2.2                      |
| 3                                                    | 11650.00        | 48.7 PK                 | 74.0           | -25.3       | 3.22 H             | 51                   | 35.8             | 12.9                     |
| 4                                                    | 11650.00        | 39.1 AV                 | 54.0           | -14.9       | 3.22 H             | 51                   | 26.2             | 12.9                     |
| 5                                                    | #17475.00       | 54.6 PK                 | 68.2           | -13.6       | 1.20 H             | 31                   | 35.9             | 18.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5825.00        | 114.7 PK                |                |             | 1.78 V             | 352                  | 112.5            | 2.2                      |
| 2                                                    | *5825.00        | 104.8 AV                |                |             | 1.78 V             | 352                  | 102.6            | 2.2                      |
| 3                                                    | 11650.00        | 50.1 PK                 | 74.0           | -23.9       | 1.56 V             | 213                  | 37.2             | 12.9                     |
| 4                                                    | 11650.00        | 40.7 AV                 | 54.0           | -13.3       | 1.56 V             | 213                  | 27.8             | 12.9                     |
| 5                                                    | #17475.00       | 56.1 PK                 | 68.2           | -12.1       | 1.33 V             | 59                   | 37.4             | 18.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

## 802.11ax (HE20)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 58.9 PK                 | 74.0           | -15.1       | 1.14 H             | 131                  | 57.2             | 1.7                      |
| 2                                                    | 5150.00         | 46.1 AV                 | 54.0           | -7.9        | 1.14 H             | 131                  | 44.4             | 1.7                      |
| 3                                                    | *5180.00        | 105.6 PK                |                |             | 1.14 H             | 131                  | 104.1            | 1.5                      |
| 4                                                    | *5180.00        | 95.6 AV                 |                |             | 1.14 H             | 131                  | 94.1             | 1.5                      |
| 5                                                    | #10360.00       | 46.6 PK                 | 68.2           | -21.6       | 3.34 H             | 30                   | 35.4             | 11.2                     |
| 6                                                    | 15540.00        | 52.9 PK                 | 74.0           | -21.1       | 1.25 H             | 44                   | 41.2             | 11.7                     |
| 7                                                    | 15540.00        | 42.0 AV                 | 54.0           | -12.0       | 1.25 H             | 44                   | 30.3             | 11.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 65.6 PK                 | 74.0           | -8.4        | 1.63 V             | 353                  | 63.9             | 1.7                      |
| 2                                                  | 5150.00         | 52.5 AV                 | 54.0           | -1.5        | 1.63 V             | 353                  | 50.8             | 1.7                      |
| 3                                                  | *5180.00        | 114.2 PK                |                |             | 1.63 V             | 353                  | 112.7            | 1.5                      |
| 4                                                  | *5180.00        | 103.1 AV                |                |             | 1.63 V             | 353                  | 101.6            | 1.5                      |
| 5                                                  | #10360.00       | 47.1 PK                 | 68.2           | -21.1       | 1.42 V             | 185                  | 35.9             | 11.2                     |
| 6                                                  | 15540.00        | 52.5 PK                 | 74.0           | -21.5       | 1.37 V             | 36                   | 40.8             | 11.7                     |
| 7                                                  | 15540.00        | 41.6 AV                 | 54.0           | -12.4       | 1.37 V             | 36                   | 29.9             | 11.7                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.8 PK                 | 74.0           | -18.2       | 1.05 H             | 218                  | 54.1             | 1.7                      |
| 2                                                    | 5150.00         | 42.3 AV                 | 54.0           | -11.7       | 1.05 H             | 218                  | 40.6             | 1.7                      |
| 3                                                    | *5200.00        | 109.6 PK                |                |             | 1.05 H             | 218                  | 108.2            | 1.4                      |
| 4                                                    | *5200.00        | 99.6 AV                 |                |             | 1.05 H             | 218                  | 98.2             | 1.4                      |
| 5                                                    | #10400.00       | 46.1 PK                 | 68.2           | -22.1       | 3.31 H             | 21                   | 34.6             | 11.5                     |
| 6                                                    | 15600.00        | 52.4 PK                 | 74.0           | -21.6       | 1.20 H             | 28                   | 40.9             | 11.5                     |
| 7                                                    | 15600.00        | 41.5 AV                 | 54.0           | -12.5       | 1.20 H             | 28                   | 30.0             | 11.5                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 57.0 PK                 | 74.0           | -17.0       | 1.61 V             | 355                  | 55.3             | 1.7                      |
| 2                                                  | 5150.00         | 44.5 AV                 | 54.0           | -9.5        | 1.61 V             | 355                  | 42.8             | 1.7                      |
| 3                                                  | *5200.00        | 114.3 PK                |                |             | 1.61 V             | 355                  | 112.9            | 1.4                      |
| 4                                                  | *5200.00        | 104.1 AV                |                |             | 1.61 V             | 355                  | 102.7            | 1.4                      |
| 5                                                  | #10400.00       | 46.9 PK                 | 68.2           | -21.3       | 1.38 V             | 172                  | 35.4             | 11.5                     |
| 6                                                  | 15600.00        | 52.4 PK                 | 74.0           | -21.6       | 1.35 V             | 31                   | 40.9             | 11.5                     |
| 7                                                  | 15600.00        | 41.3 AV                 | 54.0           | -12.7       | 1.35 V             | 31                   | 29.8             | 11.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.4 PK                 | 74.0           | -22.6       | 1.06 H             | 222                  | 49.7             | 1.7                      |
| 2                                                    | 5150.00         | 40.1 AV                 | 54.0           | -13.9       | 1.06 H             | 222                  | 38.4             | 1.7                      |
| 3                                                    | *5240.00        | 109.1 PK                |                |             | 1.06 H             | 222                  | 107.9            | 1.2                      |
| 4                                                    | *5240.00        | 99.4 AV                 |                |             | 1.06 H             | 222                  | 98.2             | 1.2                      |
| 5                                                    | 5350.00         | 50.8 PK                 | 74.0           | -23.2       | 1.06 H             | 222                  | 49.4             | 1.4                      |
| 6                                                    | 5350.00         | 39.6 AV                 | 54.0           | -14.4       | 1.06 H             | 222                  | 38.2             | 1.4                      |
| 7                                                    | #10480.00       | 46.3 PK                 | 68.2           | -21.9       | 3.26 H             | 29                   | 34.8             | 11.5                     |
| 8                                                    | 15720.00        | 52.2 PK                 | 74.0           | -21.8       | 1.20 H             | 23                   | 41.1             | 11.1                     |
| 9                                                    | 15720.00        | 41.3 AV                 | 54.0           | -12.7       | 1.20 H             | 23                   | 30.2             | 11.1                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 52.2 PK                 | 74.0           | -21.8       | 1.37 V             | 355                  | 50.5             | 1.7                      |
| 2                                                  | 5150.00         | 40.5 AV                 | 54.0           | -13.5       | 1.37 V             | 355                  | 38.8             | 1.7                      |
| 3                                                  | *5240.00        | 113.8 PK                |                |             | 1.37 V             | 355                  | 112.6            | 1.2                      |
| 4                                                  | *5240.00        | 103.8 AV                |                |             | 1.37 V             | 355                  | 102.6            | 1.2                      |
| 5                                                  | 5350.00         | 51.0 PK                 | 74.0           | -23.0       | 1.37 V             | 355                  | 49.6             | 1.4                      |
| 6                                                  | 5350.00         | 39.5 AV                 | 54.0           | -14.5       | 1.37 V             | 355                  | 38.1             | 1.4                      |
| 7                                                  | #10480.00       | 47.9 PK                 | 68.2           | -20.3       | 1.41 V             | 186                  | 36.4             | 11.5                     |
| 8                                                  | 15720.00        | 53.3 PK                 | 74.0           | -20.7       | 1.39 V             | 40                   | 42.2             | 11.1                     |
| 9                                                  | 15720.00        | 42.1 AV                 | 54.0           | -11.9       | 1.39 V             | 40                   | 31.0             | 11.1                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 108.4 PK                |                |             | 1.09 H             | 200                  | 107.2            | 1.2                      |
| 2                                                    | *5260.00        | 99.1 AV                 |                |             | 1.09 H             | 200                  | 97.9             | 1.2                      |
| 3                                                    | 5350.00         | 51.4 PK                 | 74.0           | -22.6       | 1.09 H             | 200                  | 50.0             | 1.4                      |
| 4                                                    | 5350.00         | 40.5 AV                 | 54.0           | -13.5       | 1.09 H             | 200                  | 39.1             | 1.4                      |
| 5                                                    | #10520.00       | 46.0 PK                 | 68.2           | -22.2       | 3.32 H             | 38                   | 34.6             | 11.4                     |
| 6                                                    | 15780.00        | 53.3 PK                 | 74.0           | -20.7       | 1.15 H             | 29                   | 42.6             | 10.7                     |
| 7                                                    | 15780.00        | 42.1 AV                 | 54.0           | -11.9       | 1.15 H             | 29                   | 31.4             | 10.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5260.00        | 113.6 PK                |                |             | 1.50 V             | 351                  | 112.4            | 1.2                      |
| 2                                                  | *5260.00        | 103.6 AV                |                |             | 1.50 V             | 351                  | 102.4            | 1.2                      |
| 3                                                  | 5350.00         | 50.7 PK                 | 74.0           | -23.3       | 1.50 V             | 351                  | 49.3             | 1.4                      |
| 4                                                  | 5350.00         | 39.7 AV                 | 54.0           | -14.3       | 1.50 V             | 351                  | 38.3             | 1.4                      |
| 5                                                  | #10520.00       | 46.6 PK                 | 68.2           | -21.6       | 1.47 V             | 175                  | 35.2             | 11.4                     |
| 6                                                  | 15780.00        | 52.1 PK                 | 74.0           | -21.9       | 1.36 V             | 51                   | 41.4             | 10.7                     |
| 7                                                  | 15780.00        | 41.3 AV                 | 54.0           | -12.7       | 1.36 V             | 51                   | 30.6             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 60 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 109.9 PK                |                |             | 1.15 H             | 217                  | 108.7            | 1.2                      |
| 2                                                    | *5300.00        | 100.3 AV                |                |             | 1.15 H             | 217                  | 99.1             | 1.2                      |
| 3                                                    | 5350.00         | 56.8 PK                 | 74.0           | -17.2       | 1.15 H             | 217                  | 55.4             | 1.4                      |
| 4                                                    | 5350.00         | 41.3 AV                 | 54.0           | -12.7       | 1.15 H             | 217                  | 39.9             | 1.4                      |
| 5                                                    | 10600.00        | 46.3 PK                 | 74.0           | -27.7       | 3.33 H             | 20                   | 34.5             | 11.8                     |
| 6                                                    | 10600.00        | 37.3 AV                 | 54.0           | -16.7       | 3.33 H             | 20                   | 25.5             | 11.8                     |
| 7                                                    | 15900.00        | 52.8 PK                 | 74.0           | -21.2       | 1.16 H             | 45                   | 42.1             | 10.7                     |
| 8                                                    | 15900.00        | 42.1 AV                 | 54.0           | -11.9       | 1.16 H             | 45                   | 31.4             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 113.7 PK                |                |             | 1.77 V             | 348                  | 112.5            | 1.2                      |
| 2                                                    | *5300.00        | 103.7 AV                |                |             | 1.77 V             | 348                  | 102.5            | 1.2                      |
| 3                                                    | 5350.00         | 61.4 PK                 | 74.0           | -12.6       | 1.77 V             | 348                  | 60.0             | 1.4                      |
| 4                                                    | 5350.00         | 42.3 AV                 | 54.0           | -11.7       | 1.77 V             | 348                  | 40.9             | 1.4                      |
| 5                                                    | 10600.00        | 46.8 PK                 | 74.0           | -27.2       | 1.43 V             | 173                  | 35.0             | 11.8                     |
| 6                                                    | 10600.00        | 38.6 AV                 | 54.0           | -15.4       | 1.43 V             | 173                  | 26.8             | 11.8                     |
| 7                                                    | 15900.00        | 51.9 PK                 | 74.0           | -22.1       | 1.36 V             | 25                   | 41.2             | 10.7                     |
| 8                                                    | 15900.00        | 41.1 AV                 | 54.0           | -12.9       | 1.36 V             | 25                   | 30.4             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 64 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 107.5 PK                |                |             | 3.87 H             | 222                  | 106.1            | 1.4                      |
| 2                                                    | *5320.00        | 97.6 AV                 |                |             | 3.87 H             | 222                  | 96.2             | 1.4                      |
| 3                                                    | 5350.00         | 56.0 PK                 | 74.0           | -18.0       | 3.87 H             | 222                  | 54.6             | 1.4                      |
| 4                                                    | 5350.00         | 46.9 AV                 | 54.0           | -7.1        | 3.87 H             | 222                  | 45.5             | 1.4                      |
| 5                                                    | 10640.00        | 46.9 PK                 | 74.0           | -27.1       | 3.30 H             | 21                   | 35.0             | 11.9                     |
| 6                                                    | 10640.00        | 38.1 AV                 | 54.0           | -15.9       | 3.30 H             | 21                   | 26.2             | 11.9                     |
| 7                                                    | 15960.00        | 53.0 PK                 | 74.0           | -21.0       | 1.19 H             | 49                   | 42.1             | 10.9                     |
| 8                                                    | 15960.00        | 41.7 AV                 | 54.0           | -12.3       | 1.19 H             | 49                   | 30.8             | 10.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 112.5 PK                |                |             | 1.50 V             | 360                  | 111.1            | 1.4                      |
| 2                                                    | *5320.00        | 102.2 AV                |                |             | 1.50 V             | 360                  | 100.8            | 1.4                      |
| 3                                                    | 5350.00         | 71.6 PK                 | 74.0           | -2.4        | 1.50 V             | 360                  | 70.2             | 1.4                      |
| 4                                                    | 5350.00         | 51.5 AV                 | 54.0           | -2.5        | 1.50 V             | 360                  | 50.1             | 1.4                      |
| 5                                                    | 10640.00        | 47.4 PK                 | 74.0           | -26.6       | 1.38 V             | 185                  | 35.5             | 11.9                     |
| 6                                                    | 10640.00        | 39.1 AV                 | 54.0           | -14.9       | 1.38 V             | 185                  | 27.2             | 11.9                     |
| 7                                                    | 15960.00        | 51.9 PK                 | 74.0           | -22.1       | 1.34 V             | 26                   | 41.0             | 10.9                     |
| 8                                                    | 15960.00        | 41.1 AV                 | 54.0           | -12.9       | 1.34 V             | 26                   | 30.2             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 56.2 PK                 | 74.0           | -17.8       | 3.78 H             | 236                  | 54.6             | 1.6                      |
| 2                                                    | 5460.00         | 42.2 AV                 | 54.0           | -11.8       | 3.78 H             | 236                  | 40.6             | 1.6                      |
| 3                                                    | #5470.00        | 65.2 PK                 | 68.2           | -3.0        | 3.78 H             | 236                  | 63.6             | 1.6                      |
| 4                                                    | *5500.00        | 109.2 PK                |                |             | 3.78 H             | 236                  | 107.5            | 1.7                      |
| 5                                                    | *5500.00        | 98.2 AV                 |                |             | 3.78 H             | 236                  | 96.5             | 1.7                      |
| 6                                                    | 11000.00        | 47.0 PK                 | 74.0           | -27.0       | 3.28 H             | 12                   | 34.8             | 12.2                     |
| 7                                                    | 11000.00        | 38.2 AV                 | 54.0           | -15.8       | 3.28 H             | 12                   | 26.0             | 12.2                     |
| 8                                                    | #16500.00       | 52.9 PK                 | 68.2           | -15.3       | 1.26 H             | 28                   | 39.5             | 13.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 59.9 PK                 | 74.0           | -14.1       | 1.82 V             | 13                   | 58.3             | 1.6                      |
| 2                                                    | 5460.00         | 45.3 AV                 | 54.0           | -8.7        | 1.82 V             | 13                   | 43.7             | 1.6                      |
| 3                                                    | #5470.00        | 66.7 PK                 | 68.2           | -1.5        | 1.82 V             | 13                   | 65.1             | 1.6                      |
| 4                                                    | *5500.00        | 112.3 PK                |                |             | 1.82 V             | 13                   | 110.6            | 1.7                      |
| 5                                                    | *5500.00        | 102.4 AV                |                |             | 1.82 V             | 13                   | 100.7            | 1.7                      |
| 6                                                    | 11000.00        | 47.2 PK                 | 74.0           | -26.8       | 1.43 V             | 183                  | 35.0             | 12.2                     |
| 7                                                    | 11000.00        | 39.1 AV                 | 54.0           | -14.9       | 1.43 V             | 183                  | 26.9             | 12.2                     |
| 8                                                    | #16500.00       | 52.6 PK                 | 68.2           | -15.6       | 1.35 V             | 33                   | 39.2             | 13.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 109.3 PK                |                |             | 1.01 H             | 239                  | 107.6            | 1.7                      |
| 2                                                    | *5580.00        | 99.9 AV                 |                |             | 1.01 H             | 239                  | 98.2             | 1.7                      |
| 3                                                    | 11160.00        | 46.6 PK                 | 74.0           | -27.4       | 3.26 H             | 35                   | 35.0             | 11.6                     |
| 4                                                    | 11160.00        | 38.2 AV                 | 54.0           | -15.8       | 3.26 H             | 35                   | 26.6             | 11.6                     |
| 5                                                    | #16740.00       | 52.7 PK                 | 68.2           | -15.5       | 1.20 H             | 45                   | 38.0             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 112.0 PK                |                |             | 1.78 V             | 295                  | 110.3            | 1.7                      |
| 2                                                    | *5580.00        | 101.7 AV                |                |             | 1.78 V             | 295                  | 100.0            | 1.7                      |
| 3                                                    | 11160.00        | 47.1 PK                 | 74.0           | -26.9       | 1.40 V             | 188                  | 35.5             | 11.6                     |
| 4                                                    | 11160.00        | 38.7 AV                 | 54.0           | -15.3       | 1.40 V             | 188                  | 27.1             | 11.6                     |
| 5                                                    | #16740.00       | 52.3 PK                 | 68.2           | -15.9       | 1.38 V             | 43                   | 37.6             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 107.4 PK                |                |             | 3.75 H             | 244                  | 105.6            | 1.8                      |
| 2                                                    | *5700.00        | 98.1 AV                 |                |             | 3.75 H             | 244                  | 96.3             | 1.8                      |
| 3                                                    | #5725.00        | 64.0 PK                 | 68.2           | -4.2        | 3.75 H             | 244                  | 62.1             | 1.9                      |
| 4                                                    | 11400.00        | 46.9 PK                 | 74.0           | -27.1       | 3.30 H             | 21                   | 34.1             | 12.8                     |
| 5                                                    | 11400.00        | 38.3 AV                 | 54.0           | -15.7       | 3.30 H             | 21                   | 25.5             | 12.8                     |
| 6                                                    | #17100.00       | 53.4 PK                 | 68.2           | -14.8       | 1.18 H             | 50                   | 37.1             | 16.3                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5700.00        | 111.0 PK                |                |             | 2.40 V             | 352                  | 109.2            | 1.8                      |
| 2                                                  | *5700.00        | 100.6 AV                |                |             | 2.40 V             | 352                  | 98.8             | 1.8                      |
| 3                                                  | #5725.00        | 66.0 PK                 | 68.2           | -2.2        | 2.40 V             | 352                  | 64.1             | 1.9                      |
| 4                                                  | 11400.00        | 46.9 PK                 | 74.0           | -27.1       | 1.44 V             | 197                  | 34.1             | 12.8                     |
| 5                                                  | 11400.00        | 38.8 AV                 | 54.0           | -15.2       | 1.44 V             | 197                  | 26.0             | 12.8                     |
| 6                                                  | #17100.00       | 52.6 PK                 | 68.2           | -15.6       | 1.42 V             | 38                   | 36.3             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.0 PK                 | 74.0           | -23.0       | 1.03 H             | 224                  | 49.4             | 1.6                      |
| 2                                                    | 5460.00         | 39.8 AV                 | 54.0           | -14.2       | 1.03 H             | 224                  | 38.2             | 1.6                      |
| 3                                                    | #5470.00        | 52.6 PK                 | 68.2           | -15.6       | 1.03 H             | 224                  | 51.0             | 1.6                      |
| 4                                                    | *5720.00        | 108.7 PK                |                |             | 1.03 H             | 224                  | 106.8            | 1.9                      |
| 5                                                    | *5720.00        | 99.6 AV                 |                |             | 1.03 H             | 224                  | 97.7             | 1.9                      |
| 6                                                    | #5850.00        | 51.9 PK                 | 68.2           | -16.3       | 1.03 H             | 224                  | 49.6             | 2.3                      |
| 7                                                    | 11440.00        | 46.3 PK                 | 74.0           | -27.7       | 3.26 H             | 31                   | 33.7             | 12.6                     |
| 8                                                    | 11440.00        | 37.8 AV                 | 54.0           | -16.2       | 3.26 H             | 31                   | 25.2             | 12.6                     |
| 9                                                    | #17160.00       | 53.0 PK                 | 68.2           | -15.2       | 1.22 H             | 50                   | 37.1             | 15.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.2 PK                 | 74.0           | -22.8       | 1.82 V             | 297                  | 49.6             | 1.6                      |
| 2                                                    | 5460.00         | 40.0 AV                 | 54.0           | -14.0       | 1.82 V             | 297                  | 38.4             | 1.6                      |
| 3                                                    | #5470.00        | 52.2 PK                 | 68.2           | -16.0       | 1.82 V             | 297                  | 50.6             | 1.6                      |
| 4                                                    | *5720.00        | 112.1 PK                |                |             | 1.82 V             | 297                  | 110.2            | 1.9                      |
| 5                                                    | *5720.00        | 101.8 AV                |                |             | 1.82 V             | 297                  | 99.9             | 1.9                      |
| 6                                                    | #5850.00        | 52.3 PK                 | 68.2           | -15.9       | 1.82 V             | 297                  | 50.0             | 2.3                      |
| 7                                                    | 11440.00        | 47.0 PK                 | 74.0           | -27.0       | 1.46 V             | 185                  | 34.4             | 12.6                     |
| 8                                                    | 11440.00        | 38.5 AV                 | 54.0           | -15.5       | 1.46 V             | 185                  | 25.9             | 12.6                     |
| 9                                                    | #17160.00       | 52.6 PK                 | 68.2           | -15.6       | 1.35 V             | 46                   | 36.7             | 15.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5745.00        | 110.3 PK                |                |             | 3.72 H             | 240                  | 108.4            | 1.9                      |
| 2                                                    | *5745.00        | 99.3 AV                 |                |             | 3.72 H             | 240                  | 97.4             | 1.9                      |
| 3                                                    | 11490.00        | 46.7 PK                 | 74.0           | -27.3       | 3.29 H             | 13                   | 34.2             | 12.5                     |
| 4                                                    | 11490.00        | 37.7 AV                 | 54.0           | -16.3       | 3.29 H             | 13                   | 25.2             | 12.5                     |
| 5                                                    | #17235.00       | 52.8 PK                 | 68.2           | -15.4       | 1.24 H             | 24                   | 37.0             | 15.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5745.00        | 112.0 PK                |                |             | 1.77 V             | 360                  | 110.1            | 1.9                      |
| 2                                                    | *5745.00        | 103.0 AV                |                |             | 1.77 V             | 360                  | 101.1            | 1.9                      |
| 3                                                    | 11490.00        | 47.8 PK                 | 74.0           | -26.2       | 1.45 V             | 181                  | 35.3             | 12.5                     |
| 4                                                    | 11490.00        | 39.3 AV                 | 54.0           | -14.7       | 1.45 V             | 181                  | 26.8             | 12.5                     |
| 5                                                    | #17235.00       | 52.5 PK                 | 68.2           | -15.7       | 1.40 V             | 44                   | 36.7             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5785.00        | 109.8 PK                |                |             | 3.76 H             | 238                  | 107.8            | 2.0                      |
| 2                                                    | *5785.00        | 99.1 AV                 |                |             | 3.76 H             | 238                  | 97.1             | 2.0                      |
| 3                                                    | 11570.00        | 46.0 PK                 | 74.0           | -28.0       | 3.31 H             | 41                   | 33.1             | 12.9                     |
| 4                                                    | 11570.00        | 37.5 AV                 | 54.0           | -16.5       | 3.31 H             | 41                   | 24.6             | 12.9                     |
| 5                                                    | #17355.00       | 52.2 PK                 | 68.2           | -16.0       | 1.26 H             | 47                   | 35.4             | 16.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5785.00        | 111.8 PK                |                |             | 1.75 V             | 355                  | 109.8            | 2.0                      |
| 2                                                    | *5785.00        | 102.9 AV                |                |             | 1.75 V             | 355                  | 100.9            | 2.0                      |
| 3                                                    | 11570.00        | 47.1 PK                 | 74.0           | -26.9       | 1.39 V             | 199                  | 34.2             | 12.9                     |
| 4                                                    | 11570.00        | 39.0 AV                 | 54.0           | -15.0       | 1.39 V             | 199                  | 26.1             | 12.9                     |
| 5                                                    | #17355.00       | 52.1 PK                 | 68.2           | -16.1       | 1.41 V             | 21                   | 35.3             | 16.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5825.00        | 109.6 PK                |                |             | 3.70 H             | 233                  | 107.4            | 2.2                      |
| 2                                                    | *5825.00        | 98.9 AV                 |                |             | 3.70 H             | 233                  | 96.7             | 2.2                      |
| 3                                                    | 11650.00        | 46.7 PK                 | 74.0           | -27.3       | 3.31 H             | 16                   | 33.8             | 12.9                     |
| 4                                                    | 11650.00        | 37.8 AV                 | 54.0           | -16.2       | 3.31 H             | 16                   | 24.9             | 12.9                     |
| 5                                                    | #17475.00       | 52.9 PK                 | 68.2           | -15.3       | 1.25 H             | 39                   | 34.2             | 18.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5825.00        | 111.6 PK                |                |             | 1.73 V             | 357                  | 109.4            | 2.2                      |
| 2                                                    | *5825.00        | 102.8 AV                |                |             | 1.73 V             | 357                  | 100.6            | 2.2                      |
| 3                                                    | 11650.00        | 47.2 PK                 | 74.0           | -26.8       | 1.38 V             | 172                  | 34.3             | 12.9                     |
| 4                                                    | 11650.00        | 38.9 AV                 | 54.0           | -15.1       | 1.38 V             | 172                  | 26.0             | 12.9                     |
| 5                                                    | #17475.00       | 52.2 PK                 | 68.2           | -16.0       | 1.33 V             | 45                   | 33.5             | 18.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

### 802.11ax (HE40)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 38 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 63.4 PK                 | 74.0           | -10.6       | 1.08 H             | 133                  | 61.7             | 1.7                      |
| 2                                                    | 5150.00         | 48.2 AV                 | 54.0           | -5.8        | 1.08 H             | 133                  | 46.5             | 1.7                      |
| 3                                                    | *5190.00        | 101.5 PK                |                |             | 1.08 H             | 133                  | 100.0            | 1.5                      |
| 4                                                    | *5190.00        | 89.6 AV                 |                |             | 1.08 H             | 133                  | 88.1             | 1.5                      |
| 5                                                    | #10380.00       | 46.5 PK                 | 68.2           | -21.7       | 3.29 H             | 13                   | 35.2             | 11.3                     |
| 6                                                    | 15570.00        | 52.8 PK                 | 74.0           | -21.2       | 1.17 H             | 51                   | 41.2             | 11.6                     |
| 7                                                    | 15570.00        | 41.6 AV                 | 54.0           | -12.4       | 1.17 H             | 51                   | 30.0             | 11.6                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 71.4 PK                 | 74.0           | -2.6        | 1.65 V             | 355                  | 69.7             | 1.7                      |
| 2                                                  | 5150.00         | 52.2 AV                 | 54.0           | -1.8        | 1.65 V             | 355                  | 50.5             | 1.7                      |
| 3                                                  | *5190.00        | 108.4 PK                |                |             | 1.65 V             | 355                  | 106.9            | 1.5                      |
| 4                                                  | *5190.00        | 97.1 AV                 |                |             | 1.65 V             | 355                  | 95.6             | 1.5                      |
| 5                                                  | #10380.00       | 47.5 PK                 | 68.2           | -20.7       | 1.38 V             | 194                  | 36.2             | 11.3                     |
| 6                                                  | 15570.00        | 52.6 PK                 | 74.0           | -21.4       | 1.40 V             | 30                   | 41.0             | 11.6                     |
| 7                                                  | 15570.00        | 41.6 AV                 | 54.0           | -12.4       | 1.40 V             | 30                   | 30.0             | 11.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 46 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 50.5 PK                 | 74.0           | -23.5       | 1.11 H             | 135                  | 48.8             | 1.7                      |
| 2                                                    | 5150.00         | 40.3 AV                 | 54.0           | -13.7       | 1.11 H             | 135                  | 38.6             | 1.7                      |
| 3                                                    | *5230.00        | 103.5 PK                |                |             | 1.11 H             | 135                  | 102.2            | 1.3                      |
| 4                                                    | *5230.00        | 91.8 AV                 |                |             | 1.11 H             | 135                  | 90.5             | 1.3                      |
| 5                                                    | 5350.00         | 51.0 PK                 | 74.0           | -23.0       | 1.11 H             | 135                  | 49.6             | 1.4                      |
| 6                                                    | 5350.00         | 38.0 AV                 | 54.0           | -16.0       | 1.11 H             | 135                  | 36.6             | 1.4                      |
| 7                                                    | #10460.00       | 46.9 PK                 | 68.2           | -21.3       | 3.29 H             | 35                   | 35.6             | 11.3                     |
| 8                                                    | 15690.00        | 53.1 PK                 | 74.0           | -20.9       | 1.24 H             | 38                   | 41.9             | 11.2                     |
| 9                                                    | 15690.00        | 41.9 AV                 | 54.0           | -12.1       | 1.24 H             | 38                   | 30.7             | 11.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 52.5 PK                 | 74.0           | -21.5       | 1.37 V             | 355                  | 50.8             | 1.7                      |
| 2                                                    | 5150.00         | 42.3 AV                 | 54.0           | -11.7       | 1.37 V             | 355                  | 40.6             | 1.7                      |
| 3                                                    | *5230.00        | 110.2 PK                |                |             | 1.37 V             | 355                  | 108.9            | 1.3                      |
| 4                                                    | *5230.00        | 98.7 AV                 |                |             | 1.37 V             | 355                  | 97.4             | 1.3                      |
| 5                                                    | 5350.00         | 51.7 PK                 | 74.0           | -22.3       | 1.37 V             | 355                  | 50.3             | 1.4                      |
| 6                                                    | 5350.00         | 40.0 AV                 | 54.0           | -14.0       | 1.37 V             | 355                  | 38.6             | 1.4                      |
| 7                                                    | #10460.00       | 46.6 PK                 | 68.2           | -21.6       | 1.37 V             | 190                  | 35.3             | 11.3                     |
| 8                                                    | 15690.00        | 52.4 PK                 | 74.0           | -21.6       | 1.33 V             | 21                   | 41.2             | 11.2                     |
| 9                                                    | 15690.00        | 41.8 AV                 | 54.0           | -12.2       | 1.33 V             | 21                   | 30.6             | 11.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 54 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 50.0 PK                 | 74.0           | -24.0       | 1.09 H             | 140                  | 48.3             | 1.7                      |
| 2                                                    | 5150.00         | 38.7 AV                 | 54.0           | -15.3       | 1.09 H             | 140                  | 37.0             | 1.7                      |
| 3                                                    | *5270.00        | 103.2 PK                |                |             | 1.09 H             | 140                  | 102.0            | 1.2                      |
| 4                                                    | *5270.00        | 91.6 AV                 |                |             | 1.09 H             | 140                  | 90.4             | 1.2                      |
| 5                                                    | 5350.00         | 57.1 PK                 | 74.0           | -16.9       | 1.09 H             | 140                  | 55.7             | 1.4                      |
| 6                                                    | 5350.00         | 40.6 AV                 | 54.0           | -13.4       | 1.09 H             | 140                  | 39.2             | 1.4                      |
| 7                                                    | #10540.00       | 46.5 PK                 | 68.2           | -21.7       | 3.32 H             | 33                   | 35.0             | 11.5                     |
| 8                                                    | 15810.00        | 52.8 PK                 | 74.0           | -21.2       | 1.18 H             | 30                   | 42.2             | 10.6                     |
| 9                                                    | 15810.00        | 41.8 AV                 | 54.0           | -12.2       | 1.18 H             | 30                   | 31.2             | 10.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.9 PK                 | 74.0           | -22.1       | 1.38 V             | 356                  | 50.2             | 1.7                      |
| 2                                                    | 5150.00         | 41.0 AV                 | 54.0           | -13.0       | 1.38 V             | 356                  | 39.3             | 1.7                      |
| 3                                                    | *5270.00        | 110.1 PK                |                |             | 1.38 V             | 356                  | 108.9            | 1.2                      |
| 4                                                    | *5270.00        | 98.6 AV                 |                |             | 1.38 V             | 356                  | 97.4             | 1.2                      |
| 5                                                    | 5350.00         | 58.2 PK                 | 74.0           | -15.8       | 1.38 V             | 356                  | 56.8             | 1.4                      |
| 6                                                    | 5350.00         | 41.6 AV                 | 54.0           | -12.4       | 1.38 V             | 356                  | 40.2             | 1.4                      |
| 7                                                    | #10540.00       | 47.0 PK                 | 68.2           | -21.2       | 1.38 V             | 173                  | 35.5             | 11.5                     |
| 8                                                    | 15810.00        | 52.2 PK                 | 74.0           | -21.8       | 1.41 V             | 45                   | 41.6             | 10.6                     |
| 9                                                    | 15810.00        | 41.3 AV                 | 54.0           | -12.7       | 1.41 V             | 45                   | 30.7             | 10.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 62 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5310.00        | 101.5 PK                |                |             | 1.21 H             | 135                  | 100.2            | 1.3                      |
| 2                                                    | *5310.00        | 89.0 AV                 |                |             | 1.21 H             | 135                  | 87.7             | 1.3                      |
| 3                                                    | 5350.00         | 63.1 PK                 | 74.0           | -10.9       | 1.21 H             | 135                  | 61.7             | 1.4                      |
| 4                                                    | 5350.00         | 46.8 AV                 | 54.0           | -7.2        | 1.21 H             | 135                  | 45.4             | 1.4                      |
| 5                                                    | 10620.00        | 46.7 PK                 | 74.0           | -27.3       | 3.32 H             | 20                   | 34.9             | 11.8                     |
| 6                                                    | 10620.00        | 38.3 AV                 | 54.0           | -15.7       | 3.32 H             | 20                   | 26.5             | 11.8                     |
| 7                                                    | 15930.00        | 53.3 PK                 | 74.0           | -20.7       | 1.21 H             | 26                   | 42.5             | 10.8                     |
| 8                                                    | 15930.00        | 42.1 AV                 | 54.0           | -11.9       | 1.21 H             | 26                   | 31.3             | 10.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5310.00        | 106.5 PK                |                |             | 1.37 V             | 350                  | 105.2            | 1.3                      |
| 2                                                    | *5310.00        | 96.4 AV                 |                |             | 1.37 V             | 350                  | 95.1             | 1.3                      |
| 3                                                    | 5350.00         | 65.4 PK                 | 74.0           | -8.6        | 1.37 V             | 350                  | 64.0             | 1.4                      |
| 4                                                    | 5350.00         | 52.3 AV                 | 54.0           | -1.7        | 1.37 V             | 350                  | 50.9             | 1.4                      |
| 5                                                    | 10620.00        | 47.4 PK                 | 74.0           | -26.6       | 1.36 V             | 171                  | 35.6             | 11.8                     |
| 6                                                    | 10620.00        | 39.0 AV                 | 54.0           | -15.0       | 1.36 V             | 171                  | 27.2             | 11.8                     |
| 7                                                    | 15930.00        | 52.5 PK                 | 74.0           | -21.5       | 1.34 V             | 47                   | 41.7             | 10.8                     |
| 8                                                    | 15930.00        | 41.5 AV                 | 54.0           | -12.5       | 1.34 V             | 47                   | 30.7             | 10.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 102 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 57.1 PK                 | 74.0           | -16.9       | 1.11 H             | 223                  | 55.5             | 1.6                      |
| 2                                                    | 5460.00         | 41.8 AV                 | 54.0           | -12.2       | 1.11 H             | 223                  | 40.2             | 1.6                      |
| 3                                                    | #5468.68        | 60.5 PK                 | 68.2           | -7.7        | 1.11 H             | 223                  | 58.9             | 1.6                      |
| 4                                                    | *5510.00        | 100.7 PK                |                |             | 1.11 H             | 223                  | 99.0             | 1.7                      |
| 5                                                    | *5510.00        | 88.5 AV                 |                |             | 1.11 H             | 223                  | 86.8             | 1.7                      |
| 6                                                    | 11020.00        | 46.9 PK                 | 74.0           | -27.1       | 3.32 H             | 43                   | 34.8             | 12.1                     |
| 7                                                    | 11020.00        | 38.3 AV                 | 54.0           | -15.7       | 3.32 H             | 43                   | 26.2             | 12.1                     |
| 8                                                    | #16530.00       | 53.3 PK                 | 68.2           | -14.9       | 1.24 H             | 24                   | 39.7             | 13.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 60.9 PK                 | 74.0           | -13.1       | 1.30 V             | 312                  | 59.3             | 1.6                      |
| 2                                                    | 5460.00         | 45.0 AV                 | 54.0           | -9.0        | 1.30 V             | 312                  | 43.4             | 1.6                      |
| 3                                                    | #5467.05        | 66.1 PK                 | 68.2           | -2.1        | 1.30 V             | 312                  | 64.5             | 1.6                      |
| 4                                                    | *5510.00        | 104.3 PK                |                |             | 1.30 V             | 312                  | 102.6            | 1.7                      |
| 5                                                    | *5510.00        | 94.9 AV                 |                |             | 1.30 V             | 312                  | 93.2             | 1.7                      |
| 6                                                    | 11020.00        | 47.0 PK                 | 74.0           | -27.0       | 1.47 V             | 201                  | 34.9             | 12.1                     |
| 7                                                    | 11020.00        | 38.8 AV                 | 54.0           | -15.2       | 1.47 V             | 201                  | 26.7             | 12.1                     |
| 8                                                    | #16530.00       | 53.0 PK                 | 68.2           | -15.2       | 1.34 V             | 37                   | 39.4             | 13.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 110 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5550.00        | 102.7 PK                |                |             | 1.13 H             | 134                  | 101.0            | 1.7                      |
| 2                                                    | *5550.00        | 91.2 AV                 |                |             | 1.13 H             | 134                  | 89.5             | 1.7                      |
| 3                                                    | 11100.00        | 46.6 PK                 | 74.0           | -27.4       | 3.35 H             | 21                   | 35.0             | 11.6                     |
| 4                                                    | 11100.00        | 38.1 AV                 | 54.0           | -15.9       | 3.35 H             | 21                   | 26.5             | 11.6                     |
| 5                                                    | #16650.00       | 53.1 PK                 | 68.2           | -15.1       | 1.20 H             | 23                   | 38.6             | 14.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5550.00        | 111.3 PK                |                |             | 1.31 V             | 313                  | 109.6            | 1.7                      |
| 2                                                    | *5550.00        | 99.1 AV                 |                |             | 1.31 V             | 313                  | 97.4             | 1.7                      |
| 3                                                    | 11100.00        | 47.5 PK                 | 74.0           | -26.5       | 1.41 V             | 181                  | 35.9             | 11.6                     |
| 4                                                    | 11100.00        | 39.2 AV                 | 54.0           | -14.8       | 1.41 V             | 181                  | 27.6             | 11.6                     |
| 5                                                    | #16650.00       | 52.7 PK                 | 68.2           | -15.5       | 1.31 V             | 45                   | 38.2             | 14.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 134 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5670.00        | 102.5 PK                |                |             | 1.14 H             | 139                  | 100.7            | 1.8                      |
| 2                                                    | *5670.00        | 89.9 AV                 |                |             | 1.14 H             | 139                  | 88.1             | 1.8                      |
| 3                                                    | #5725.00        | 62.3 PK                 | 68.2           | -5.9        | 1.14 H             | 139                  | 60.4             | 1.9                      |
| 4                                                    | 11340.00        | 46.2 PK                 | 74.0           | -27.8       | 3.25 H             | 37                   | 33.7             | 12.5                     |
| 5                                                    | 11340.00        | 37.7 AV                 | 54.0           | -16.3       | 3.25 H             | 37                   | 25.2             | 12.5                     |
| 6                                                    | #17010.00       | 52.7 PK                 | 68.2           | -15.5       | 1.17 H             | 39                   | 36.5             | 16.2                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5670.00        | 109.8 PK                |                |             | 1.31 V             | 272                  | 108.0            | 1.8                      |
| 2                                                  | *5670.00        | 98.2 AV                 |                |             | 1.31 V             | 272                  | 96.4             | 1.8                      |
| 3                                                  | #5725.00        | 66.1 PK                 | 68.2           | -2.1        | 1.31 V             | 272                  | 64.2             | 1.9                      |
| 4                                                  | 11340.00        | 47.0 PK                 | 74.0           | -27.0       | 1.43 V             | 191                  | 34.5             | 12.5                     |
| 5                                                  | 11340.00        | 38.4 AV                 | 54.0           | -15.6       | 1.43 V             | 191                  | 25.9             | 12.5                     |
| 6                                                  | #17010.00       | 52.8 PK                 | 68.2           | -15.4       | 1.36 V             | 23                   | 36.6             | 16.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 142 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 50.8 PK                 | 74.0           | -23.2       | 1.08 H             | 134                  | 49.2             | 1.6                      |
| 2                                                    | 5460.00         | 39.5 AV                 | 54.0           | -14.5       | 1.08 H             | 134                  | 37.9             | 1.6                      |
| 3                                                    | #5470.00        | 52.0 PK                 | 68.2           | -16.2       | 1.08 H             | 134                  | 50.4             | 1.6                      |
| 4                                                    | *5710.00        | 103.6 PK                |                |             | 1.08 H             | 134                  | 101.8            | 1.8                      |
| 5                                                    | *5710.00        | 91.8 AV                 |                |             | 1.08 H             | 134                  | 90.0             | 1.8                      |
| 6                                                    | #5850.00        | 52.7 PK                 | 68.2           | -15.5       | 1.08 H             | 134                  | 50.4             | 2.3                      |
| 7                                                    | 11420.00        | 47.2 PK                 | 74.0           | -26.8       | 3.34 H             | 15                   | 34.5             | 12.7                     |
| 8                                                    | 11420.00        | 38.3 AV                 | 54.0           | -15.7       | 3.34 H             | 15                   | 25.6             | 12.7                     |
| 9                                                    | #17130.00       | 53.0 PK                 | 68.2           | -15.2       | 1.16 H             | 28                   | 36.9             | 16.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.3 PK                 | 74.0           | -22.7       | 1.33 V             | 288                  | 49.7             | 1.6                      |
| 2                                                    | 5460.00         | 40.0 AV                 | 54.0           | -14.0       | 1.33 V             | 288                  | 38.4             | 1.6                      |
| 3                                                    | #5470.00        | 52.5 PK                 | 68.2           | -15.7       | 1.33 V             | 288                  | 50.9             | 1.6                      |
| 4                                                    | *5710.00        | 111.1 PK                |                |             | 1.33 V             | 288                  | 109.3            | 1.8                      |
| 5                                                    | *5710.00        | 99.0 AV                 |                |             | 1.33 V             | 288                  | 97.2             | 1.8                      |
| 6                                                    | #5850.00        | 52.8 PK                 | 68.2           | -15.4       | 1.33 V             | 288                  | 50.5             | 2.3                      |
| 7                                                    | 11420.00        | 46.9 PK                 | 74.0           | -27.1       | 1.37 V             | 190                  | 34.2             | 12.7                     |
| 8                                                    | 11420.00        | 38.4 AV                 | 54.0           | -15.6       | 1.37 V             | 190                  | 25.7             | 12.7                     |
| 9                                                    | #17130.00       | 53.2 PK                 | 68.2           | -15.0       | 1.35 V             | 47                   | 37.1             | 16.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 151 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5755.00        | 106.1 PK                |                |             | 1.12 H             | 232                  | 104.2            | 1.9                      |
| 2                                                    | *5755.00        | 95.5 AV                 |                |             | 1.12 H             | 232                  | 93.6             | 1.9                      |
| 3                                                    | 11510.00        | 46.6 PK                 | 74.0           | -27.4       | 3.26 H             | 18                   | 34.1             | 12.5                     |
| 4                                                    | 11510.00        | 38.0 AV                 | 54.0           | -16.0       | 3.26 H             | 18                   | 25.5             | 12.5                     |
| 5                                                    | #17265.00       | 52.4 PK                 | 68.2           | -15.8       | 1.18 H             | 38                   | 36.4             | 16.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5755.00        | 112.5 PK                |                |             | 1.73 V             | 359                  | 110.6            | 1.9                      |
| 2                                                    | *5755.00        | 101.2 AV                |                |             | 1.73 V             | 359                  | 99.3             | 1.9                      |
| 3                                                    | 11510.00        | 47.0 PK                 | 74.0           | -27.0       | 1.39 V             | 197                  | 34.5             | 12.5                     |
| 4                                                    | 11510.00        | 38.5 AV                 | 54.0           | -15.5       | 1.39 V             | 197                  | 26.0             | 12.5                     |
| 5                                                    | #17265.00       | 52.9 PK                 | 68.2           | -15.3       | 1.43 V             | 32                   | 36.9             | 16.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 159 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5795.00        | 105.9 PK                |                |             | 1.15 H             | 235                  | 103.8            | 2.1                      |
| 2                                                    | *5795.00        | 95.4 AV                 |                |             | 1.15 H             | 235                  | 93.3             | 2.1                      |
| 3                                                    | 11590.00        | 47.0 PK                 | 74.0           | -27.0       | 3.31 H             | 20                   | 34.2             | 12.8                     |
| 4                                                    | 11590.00        | 38.1 AV                 | 54.0           | -15.9       | 3.31 H             | 20                   | 25.3             | 12.8                     |
| 5                                                    | #17385.00       | 52.8 PK                 | 68.2           | -15.4       | 1.27 H             | 39                   | 35.5             | 17.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5795.00        | 112.3 PK                |                |             | 1.70 V             | 357                  | 110.2            | 2.1                      |
| 2                                                    | *5795.00        | 101.1 AV                |                |             | 1.70 V             | 357                  | 99.0             | 2.1                      |
| 3                                                    | 11590.00        | 47.6 PK                 | 74.0           | -26.4       | 1.45 V             | 193                  | 34.8             | 12.8                     |
| 4                                                    | 11590.00        | 39.1 AV                 | 54.0           | -14.9       | 1.45 V             | 193                  | 26.3             | 12.8                     |
| 5                                                    | #17385.00       | 53.1 PK                 | 68.2           | -15.1       | 1.36 V             | 25                   | 35.8             | 17.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

# 802.11ax (HE80)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 42 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 62.6 PK                 | 74.0           | -11.4       | 4.00 H             | 226                  | 60.9             | 1.7                      |
| 2                                                    | 5150.00         | 47.4 AV                 | 54.0           | -6.6        | 4.00 H             | 226                  | 45.7             | 1.7                      |
| 3                                                    | *5210.00        | 96.5 PK                 |                |             | 4.00 H             | 226                  | 95.1             | 1.4                      |
| 4                                                    | *5210.00        | 86.6 AV                 |                |             | 4.00 H             | 226                  | 85.2             | 1.4                      |
| 5                                                    | 5350.00         | 49.2 PK                 | 74.0           | -24.8       | 4.00 H             | 226                  | 47.8             | 1.4                      |
| 6                                                    | 5350.00         | 40.0 AV                 | 54.0           | -14.0       | 4.00 H             | 226                  | 38.6             | 1.4                      |
| 7                                                    | #10420.00       | 46.2 PK                 | 68.2           | -22.0       | 3.35 H             | 16                   | 34.8             | 11.4                     |
| 8                                                    | 15630.00        | 52.6 PK                 | 74.0           | -21.4       | 1.19 H             | 37                   | 41.2             | 11.4                     |
| 9                                                    | 15630.00        | 41.5 AV                 | 54.0           | -12.5       | 1.19 H             | 37                   | 30.1             | 11.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 68.6 PK                 | 74.0           | -5.4        | 1.70 V             | 354                  | 66.9             | 1.7                      |
| 2                                                    | 5150.00         | 52.1 AV                 | 54.0           | -1.9        | 1.70 V             | 354                  | 50.4             | 1.7                      |
| 3                                                    | *5210.00        | 103.2 PK                |                |             | 1.70 V             | 354                  | 101.8            | 1.4                      |
| 4                                                    | *5210.00        | 93.0 AV                 |                |             | 1.70 V             | 354                  | 91.6             | 1.4                      |
| 5                                                    | 5350.00         | 50.5 PK                 | 74.0           | -23.5       | 1.70 V             | 354                  | 49.1             | 1.4                      |
| 6                                                    | 5350.00         | 40.6 AV                 | 54.0           | -13.4       | 1.70 V             | 354                  | 39.2             | 1.4                      |
| 7                                                    | #10420.00       | 47.5 PK                 | 68.2           | -20.7       | 1.42 V             | 184                  | 36.1             | 11.4                     |
| 8                                                    | 15630.00        | 52.4 PK                 | 74.0           | -21.6       | 1.33 V             | 51                   | 41.0             | 11.4                     |
| 9                                                    | 15630.00        | 41.5 AV                 | 54.0           | -12.5       | 1.33 V             | 51                   | 30.1             | 11.4                     |

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 58 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 50.8 PK                 | 74.0           | -23.2       | 3.98 H             | 228                  | 49.1             | 1.7                      |
| 2                                                    | 5150.00         | 40.5 AV                 | 54.0           | -13.5       | 3.98 H             | 228                  | 38.8             | 1.7                      |
| 3                                                    | *5290.00        | 96.3 PK                 |                |             | 3.98 H             | 228                  | 95.1             | 1.2                      |
| 4                                                    | *5290.00        | 86.2 AV                 |                |             | 3.98 H             | 228                  | 85.0             | 1.2                      |
| 5                                                    | 5350.00         | 59.2 PK                 | 74.0           | -14.8       | 3.98 H             | 228                  | 57.8             | 1.4                      |
| 6                                                    | 5350.00         | 46.4 AV                 | 54.0           | -7.6        | 3.98 H             | 228                  | 45.0             | 1.4                      |
| 7                                                    | #10580.00       | 46.2 PK                 | 68.2           | -22.0       | 3.35 H             | 19                   | 34.5             | 11.7                     |
| 8                                                    | 15870.00        | 52.5 PK                 | 74.0           | -21.5       | 1.17 H             | 44                   | 41.9             | 10.6                     |
| 9                                                    | 15870.00        | 41.6 AV                 | 54.0           | -12.4       | 1.17 H             | 44                   | 31.0             | 10.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.8 PK                 | 74.0           | -22.2       | 1.72 V             | 355                  | 50.1             | 1.7                      |
| 2                                                    | 5150.00         | 41.6 AV                 | 54.0           | -12.4       | 1.72 V             | 355                  | 39.9             | 1.7                      |
| 3                                                    | *5290.00        | 103.7 PK                |                |             | 1.72 V             | 355                  | 102.5            | 1.2                      |
| 4                                                    | *5290.00        | 93.0 AV                 |                |             | 1.72 V             | 355                  | 91.8             | 1.2                      |
| 5                                                    | 5350.00         | 65.5 PK                 | 74.0           | -8.5        | 1.72 V             | 355                  | 64.1             | 1.4                      |
| 6                                                    | 5350.00         | 52.0 AV                 | 54.0           | -2.0        | 1.72 V             | 355                  | 50.6             | 1.4                      |
| 7                                                    | #10580.00       | 46.8 PK                 | 68.2           | -21.4       | 1.36 V             | 180                  | 35.1             | 11.7                     |
| 8                                                    | 15870.00        | 52.1 PK                 | 74.0           | -21.9       | 1.33 V             | 36                   | 41.5             | 10.6                     |
| 9                                                    | 15870.00        | 41.5 AV                 | 54.0           | -12.5       | 1.33 V             | 36                   | 30.9             | 10.6                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                |                          |              |
|------------------------|----------------|--------------------------|--------------|
| <b>Channel</b>         | TX Channel 106 | <b>Detector Function</b> | Peak (PK)    |
| <b>Frequency Range</b> | 1GHz ~ 40GHz   |                          | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 57.3 PK                 | 74.0           | -16.7       | 3.95 H             | 225                  | 55.7             | 1.6                      |
| 2                                                    | 5460.00         | 44.5 AV                 | 54.0           | -9.5        | 3.95 H             | 225                  | 42.9             | 1.6                      |
| 3                                                    | #5467.18        | 59.2 PK                 | 68.2           | -9.0        | 3.95 H             | 225                  | 57.6             | 1.6                      |
| 4                                                    | *5530.00        | 96.2 PK                 |                |             | 3.95 H             | 225                  | 94.5             | 1.7                      |
| 5                                                    | *5530.00        | 86.0 AV                 |                |             | 3.95 H             | 225                  | 84.3             | 1.7                      |
| 6                                                    | #5810.77        | 51.4 PK                 | 68.2           | -16.8       | 3.95 H             | 225                  | 49.3             | 2.1                      |
| 7                                                    | 11060.00        | 46.7 PK                 | 74.0           | -27.3       | 3.30 H             | 36                   | 34.9             | 11.8                     |
| 8                                                    | 11060.00        | 38.2 AV                 | 54.0           | -15.8       | 3.30 H             | 36                   | 26.4             | 11.8                     |
| 9                                                    | #16590.00       | 52.4 PK                 | 68.2           | -15.8       | 1.21 H             | 31                   | 38.2             | 14.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 63.8 PK                 | 74.0           | -10.2       | 1.73 V             | 357                  | 62.2             | 1.6                      |
| 2                                                    | 5460.00         | 49.6 AV                 | 54.0           | -4.4        | 1.73 V             | 357                  | 48.0             | 1.6                      |
| 3                                                    | #5467.12        | 66.7 PK                 | 68.2           | -1.5        | 1.73 V             | 357                  | 65.1             | 1.6                      |
| 4                                                    | *5530.00        | 101.6 PK                |                |             | 1.73 V             | 357                  | 99.9             | 1.7                      |
| 5                                                    | *5530.00        | 92.9 AV                 |                |             | 1.73 V             | 357                  | 91.2             | 1.7                      |
| 6                                                    | #5781.29        | 52.6 PK                 | 68.2           | -15.6       | 1.73 V             | 357                  | 50.6             | 2.0                      |
| 7                                                    | 11060.00        | 47.7 PK                 | 74.0           | -26.3       | 1.39 V             | 190                  | 35.9             | 11.8                     |
| 8                                                    | 11060.00        | 39.2 AV                 | 54.0           | -14.8       | 1.39 V             | 190                  | 27.4             | 11.8                     |
| 9                                                    | #16590.00       | 52.3 PK                 | 68.2           | -15.9       | 1.36 V             | 41                   | 38.1             | 14.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 122 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5610.00        | 100.1 PK                |                |             | 3.95 H             | 209                  | 98.5             | 1.6                      |
| 2                                                    | *5610.00        | 90.0 AV                 |                |             | 3.95 H             | 209                  | 88.4             | 1.6                      |
| 3                                                    | #5725.00        | 60.2 PK                 | 68.2           | -8.0        | 3.95 H             | 209                  | 58.3             | 1.9                      |
| 4                                                    | 11220.00        | 46.4 PK                 | 74.0           | -27.6       | 3.32 H             | 30                   | 34.7             | 11.7                     |
| 5                                                    | 11220.00        | 37.7 AV                 | 54.0           | -16.3       | 3.32 H             | 30                   | 26.0             | 11.7                     |
| 6                                                    | #16830.00       | 52.7 PK                 | 68.2           | -15.5       | 1.20 H             | 21                   | 37.6             | 15.1                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5610.00        | 107.4 PK                |                |             | 1.62 V             | 295                  | 105.8            | 1.6                      |
| 2                                                  | *5610.00        | 96.8 AV                 |                |             | 1.62 V             | 295                  | 95.2             | 1.6                      |
| 3                                                  | #5725.00        | 65.2 PK                 | 68.2           | -3.0        | 1.62 V             | 295                  | 63.3             | 1.9                      |
| 4                                                  | 11220.00        | 47.2 PK                 | 74.0           | -26.8       | 1.46 V             | 192                  | 35.5             | 11.7                     |
| 5                                                  | 11220.00        | 38.7 AV                 | 54.0           | -15.3       | 1.46 V             | 192                  | 27.0             | 11.7                     |
| 6                                                  | #16830.00       | 52.4 PK                 | 68.2           | -15.8       | 1.36 V             | 33                   | 37.3             | 15.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 138 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.6 PK                 | 74.0           | -22.4       | 3.91 H             | 239                  | 50.0             | 1.6                      |
| 2                                                    | 5460.00         | 41.2 AV                 | 54.0           | -12.8       | 3.91 H             | 239                  | 39.6             | 1.6                      |
| 3                                                    | #5470.00        | 53.1 PK                 | 68.2           | -15.1       | 3.91 H             | 239                  | 51.5             | 1.6                      |
| 4                                                    | *5690.00        | 99.8 PK                 |                |             | 3.91 H             | 239                  | 98.1             | 1.7                      |
| 5                                                    | *5690.00        | 89.8 AV                 |                |             | 3.91 H             | 239                  | 88.1             | 1.7                      |
| 6                                                    | #5850.00        | 57.3 PK                 | 68.2           | -10.9       | 3.91 H             | 239                  | 55.0             | 2.3                      |
| 7                                                    | 11380.00        | 46.5 PK                 | 74.0           | -27.5       | 3.34 H             | 16                   | 33.9             | 12.6                     |
| 8                                                    | 11380.00        | 37.8 AV                 | 54.0           | -16.2       | 3.34 H             | 16                   | 25.2             | 12.6                     |
| 9                                                    | #17070.00       | 52.6 PK                 | 68.2           | -15.6       | 1.25 H             | 42                   | 36.4             | 16.2                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5460.00         | 51.3 PK                 | 74.0           | -22.7       | 1.65 V             | 299                  | 49.7             | 1.6                      |
| 2                                                  | 5460.00         | 40.9 AV                 | 54.0           | -13.1       | 1.65 V             | 299                  | 39.3             | 1.6                      |
| 3                                                  | #5470.00        | 53.5 PK                 | 68.2           | -14.7       | 1.65 V             | 299                  | 51.9             | 1.6                      |
| 4                                                  | *5690.00        | 107.1 PK                |                |             | 1.65 V             | 299                  | 105.4            | 1.7                      |
| 5                                                  | *5690.00        | 96.3 AV                 |                |             | 1.65 V             | 299                  | 94.6             | 1.7                      |
| 6                                                  | #5850.00        | 60.1 PK                 | 68.2           | -8.1        | 1.65 V             | 299                  | 57.8             | 2.3                      |
| 7                                                  | 11380.00        | 47.5 PK                 | 74.0           | -26.5       | 1.38 V             | 179                  | 34.9             | 12.6                     |
| 8                                                  | 11380.00        | 38.9 AV                 | 54.0           | -15.1       | 1.38 V             | 179                  | 26.3             | 12.6                     |
| 9                                                  | #17070.00       | 52.8 PK                 | 68.2           | -15.4       | 1.41 V             | 34                   | 36.6             | 16.2                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 155 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5775.00        | 101.6 PK                |                |             | 1.15 H             | 223                  | 99.6             | 2.0                      |
| 2                                                    | *5775.00        | 91.1 AV                 |                |             | 1.15 H             | 223                  | 89.1             | 2.0                      |
| 3                                                    | 11550.00        | 46.5 PK                 | 74.0           | -27.5       | 3.30 H             | 28                   | 33.8             | 12.7                     |
| 4                                                    | 11550.00        | 37.8 AV                 | 54.0           | -16.2       | 3.30 H             | 28                   | 25.1             | 12.7                     |
| 5                                                    | #17325.00       | 52.8 PK                 | 68.2           | -15.4       | 1.21 H             | 36                   | 36.4             | 16.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5775.00        | 107.3 PK                |                |             | 1.77 V             | 352                  | 105.3            | 2.0                      |
| 2                                                    | *5775.00        | 96.7 AV                 |                |             | 1.77 V             | 352                  | 94.7             | 2.0                      |
| 3                                                    | 11550.00        | 47.0 PK                 | 74.0           | -27.0       | 1.41 V             | 196                  | 34.3             | 12.7                     |
| 4                                                    | 11550.00        | 38.9 AV                 | 54.0           | -15.1       | 1.41 V             | 196                  | 26.2             | 12.7                     |
| 5                                                    | #17325.00       | 52.2 PK                 | 68.2           | -16.0       | 1.40 V             | 34                   | 35.8             | 16.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

# 802.11ax (RU26)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 50.7 PK                 | 74.0           | -23.3       | 1.35 H             | 217                  | 49.0             | 1.7                      |
| 2                                                    | 5150.00         | 39.0 AV                 | 54.0           | -15.0       | 1.35 H             | 217                  | 37.3             | 1.7                      |
| 3                                                    | *5180.00        | 104.5 PK                |                |             | 1.35 H             | 217                  | 103.0            | 1.5                      |
| 4                                                    | *5180.00        | 95.3 AV                 |                |             | 1.35 H             | 217                  | 93.8             | 1.5                      |
| 5                                                    | #10343.00       | 47.2 PK                 | 68.2           | -21.0       | 2.12 H             | 80                   | 36.1             | 11.1                     |
| 6                                                    | 15514.50        | 46.3 PK                 | 74.0           | -27.7       | 1.38 H             | 88                   | 34.6             | 11.7                     |
| 7                                                    | 15514.50        | 32.4 AV                 | 54.0           | -21.6       | 1.38 H             | 88                   | 20.7             | 11.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 55.2 PK                 | 74.0           | -18.8       | 1.42 V             | 350                  | 53.5             | 1.7                      |
| 2                                                  | 5150.00         | 40.7 AV                 | 54.0           | -13.3       | 1.42 V             | 350                  | 39.0             | 1.7                      |
| 3                                                  | *5180.00        | 112.3 PK                |                |             | 1.42 V             | 350                  | 110.8            | 1.5                      |
| 4                                                  | *5180.00        | 101.2 AV                |                |             | 1.42 V             | 350                  | 99.7             | 1.5                      |
| 5                                                  | #10343.00       | 46.7 PK                 | 68.2           | -21.5       | 1.27 V             | 81                   | 35.6             | 11.1                     |
| 6                                                  | 15514.50        | 46.7 PK                 | 74.0           | -27.3       | 1.84 V             | 109                  | 35.0             | 11.7                     |
| 7                                                  | 15514.50        | 33.3 AV                 | 54.0           | -20.7       | 1.84 V             | 109                  | 21.6             | 11.7                     |

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 50.4 PK                 | 74.0           | -23.6       | 1.38 H             | 209                  | 48.7             | 1.7                      |
| 2                                                    | 5150.00         | 38.8 AV                 | 54.0           | -15.2       | 1.38 H             | 209                  | 37.1             | 1.7                      |
| 3                                                    | *5200.00        | 103.9 PK                |                |             | 1.38 H             | 209                  | 102.5            | 1.4                      |
| 4                                                    | *5200.00        | 95.0 AV                 |                |             | 1.38 H             | 209                  | 93.6             | 1.4                      |
| 5                                                    | #10400.00       | 46.5 PK                 | 68.2           | -21.7       | 2.19 H             | 62                   | 35.0             | 11.5                     |
| 6                                                    | 15600.00        | 46.1 PK                 | 74.0           | -27.9       | 1.38 H             | 84                   | 34.6             | 11.5                     |
| 7                                                    | 15600.00        | 32.3 AV                 | 54.0           | -21.7       | 1.38 H             | 84                   | 20.8             | 11.5                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 51.4 PK                 | 74.0           | -22.6       | 1.37 V             | 337                  | 49.7             | 1.7                      |
| 2                                                  | 5150.00         | 40.0 AV                 | 54.0           | -14.0       | 1.37 V             | 337                  | 38.3             | 1.7                      |
| 3                                                  | *5200.00        | 112.6 PK                |                |             | 1.37 V             | 337                  | 111.2            | 1.4                      |
| 4                                                  | *5200.00        | 101.8 AV                |                |             | 1.37 V             | 337                  | 100.4            | 1.4                      |
| 5                                                  | #10400.00       | 47.2 PK                 | 68.2           | -21.0       | 1.23 V             | 75                   | 35.7             | 11.5                     |
| 6                                                  | 15600.00        | 46.0 PK                 | 74.0           | -28.0       | 1.95 V             | 133                  | 34.5             | 11.5                     |
| 7                                                  | 15600.00        | 32.7 AV                 | 54.0           | -21.3       | 1.95 V             | 133                  | 21.2             | 11.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 50.7 PK                 | 74.0           | -23.3       | 1.38 H             | 208                  | 49.0             | 1.7                      |
| 2                                                    | 5150.00         | 39.1 AV                 | 54.0           | -14.9       | 1.38 H             | 208                  | 37.4             | 1.7                      |
| 3                                                    | *5240.00        | 105.3 PK                |                |             | 1.38 H             | 208                  | 104.1            | 1.2                      |
| 4                                                    | *5240.00        | 95.8 AV                 |                |             | 1.38 H             | 208                  | 94.6             | 1.2                      |
| 5                                                    | #10497.00       | 46.5 PK                 | 68.2           | -21.7       | 2.14 H             | 75                   | 35.1             | 11.4                     |
| 6                                                    | 15745.50        | 47.3 PK                 | 74.0           | -26.7       | 1.32 H             | 69                   | 36.4             | 10.9                     |
| 7                                                    | 15745.50        | 33.3 AV                 | 54.0           | -20.7       | 1.32 H             | 69                   | 22.4             | 10.9                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 55.0 PK                 | 74.0           | -19.0       | 1.37 V             | 347                  | 53.3             | 1.7                      |
| 2                                                  | 5150.00         | 40.4 AV                 | 54.0           | -13.6       | 1.37 V             | 347                  | 38.7             | 1.7                      |
| 3                                                  | *5240.00        | 112.6 PK                |                |             | 1.37 V             | 347                  | 111.4            | 1.2                      |
| 4                                                  | *5240.00        | 99.2 AV                 |                |             | 1.37 V             | 347                  | 98.0             | 1.2                      |
| 5                                                  | #10497.00       | 47.6 PK                 | 68.2           | -20.6       | 1.20 V             | 87                   | 36.2             | 11.4                     |
| 6                                                  | 15745.50        | 45.7 PK                 | 74.0           | -28.3       | 1.87 V             | 128                  | 34.8             | 10.9                     |
| 7                                                  | 15745.50        | 32.6 AV                 | 54.0           | -21.4       | 1.87 V             | 128                  | 21.7             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 104.5 PK                |                |             | 1.31 H             | 216                  | 103.3            | 1.2                      |
| 2                                                    | *5260.00        | 95.1 AV                 |                |             | 1.31 H             | 216                  | 93.9             | 1.2                      |
| 3                                                    | 5350.00         | 50.9 PK                 | 74.0           | -23.1       | 1.31 H             | 216                  | 49.5             | 1.4                      |
| 4                                                    | 5350.00         | 39.4 AV                 | 54.0           | -14.6       | 1.31 H             | 216                  | 38.0             | 1.4                      |
| 5                                                    | #10503.00       | 46.9 PK                 | 68.2           | -21.3       | 2.16 H             | 63                   | 35.5             | 11.4                     |
| 6                                                    | 15754.50        | 46.0 PK                 | 74.0           | -28.0       | 1.37 H             | 88                   | 35.2             | 10.8                     |
| 7                                                    | 15754.50        | 32.5 AV                 | 54.0           | -21.5       | 1.37 H             | 88                   | 21.7             | 10.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5260.00        | 112.3 PK                |                |             | 1.44 V             | 360                  | 111.1            | 1.2                      |
| 2                                                  | *5260.00        | 99.3 AV                 |                |             | 1.44 V             | 360                  | 98.1             | 1.2                      |
| 3                                                  | 5350.00         | 55.0 PK                 | 74.0           | -19.0       | 1.44 V             | 360                  | 53.6             | 1.4                      |
| 4                                                  | 5350.00         | 40.4 AV                 | 54.0           | -13.6       | 1.44 V             | 360                  | 39.0             | 1.4                      |
| 5                                                  | #10503.00       | 46.8 PK                 | 68.2           | -21.4       | 1.23 V             | 78                   | 35.4             | 11.4                     |
| 6                                                  | 15754.50        | 46.8 PK                 | 74.0           | -27.2       | 1.90 V             | 124                  | 36.0             | 10.8                     |
| 7                                                  | 15754.50        | 33.3 AV                 | 54.0           | -20.7       | 1.90 V             | 124                  | 22.5             | 10.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>Channel</b>         | TX Channel 60 | <b>Detector Function</b> | Peak (PK)    |
| <b>Frequency Range</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 104.5 PK                |                |             | 1.37 H             | 207                  | 103.3            | 1.2                      |
| 2                                                    | *5300.00        | 95.4 AV                 |                |             | 1.37 H             | 207                  | 94.2             | 1.2                      |
| 3                                                    | 5350.00         | 51.1 PK                 | 74.0           | -22.9       | 1.37 H             | 207                  | 49.7             | 1.4                      |
| 4                                                    | 5350.00         | 39.4 AV                 | 54.0           | -14.6       | 1.37 H             | 207                  | 38.0             | 1.4                      |
| 5                                                    | 10600.00        | 47.0 PK                 | 74.0           | -27.0       | 2.10 H             | 92                   | 35.2             | 11.8                     |
| 6                                                    | 10600.00        | 35.9 AV                 | 54.0           | -18.1       | 2.10 H             | 92                   | 24.1             | 11.8                     |
| 7                                                    | 15900.00        | 46.4 PK                 | 74.0           | -27.6       | 1.38 H             | 63                   | 35.7             | 10.7                     |
| 8                                                    | 15900.00        | 32.8 AV                 | 54.0           | -21.2       | 1.38 H             | 63                   | 22.1             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 112.2 PK                |                |             | 1.33 V             | 347                  | 111.0            | 1.2                      |
| 2                                                    | *5300.00        | 100.1 AV                |                |             | 1.33 V             | 347                  | 98.9             | 1.2                      |
| 3                                                    | 5350.00         | 54.9 PK                 | 74.0           | -19.1       | 1.33 V             | 347                  | 53.5             | 1.4                      |
| 4                                                    | 5350.00         | 40.4 AV                 | 54.0           | -13.6       | 1.33 V             | 347                  | 39.0             | 1.4                      |
| 5                                                    | 10600.00        | 47.7 PK                 | 74.0           | -26.3       | 1.19 V             | 70                   | 35.9             | 11.8                     |
| 6                                                    | 10600.00        | 36.5 AV                 | 54.0           | -17.5       | 1.19 V             | 70                   | 24.7             | 11.8                     |
| 7                                                    | 15900.00        | 46.2 PK                 | 74.0           | -27.8       | 1.88 V             | 124                  | 35.5             | 10.7                     |
| 8                                                    | 15900.00        | 33.1 AV                 | 54.0           | -20.9       | 1.88 V             | 124                  | 22.4             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 64 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 105.4 PK                |                |             | 1.31 H             | 217                  | 104.0            | 1.4                      |
| 2                                                    | *5320.00        | 96.7 AV                 |                |             | 1.31 H             | 217                  | 95.3             | 1.4                      |
| 3                                                    | 5350.00         | 51.2 PK                 | 74.0           | -22.8       | 1.31 H             | 217                  | 49.8             | 1.4                      |
| 4                                                    | 5350.00         | 39.4 AV                 | 54.0           | -14.6       | 1.31 H             | 217                  | 38.0             | 1.4                      |
| 5                                                    | 10657.00        | 46.6 PK                 | 74.0           | -27.4       | 2.16 H             | 85                   | 34.6             | 12.0                     |
| 6                                                    | 10657.00        | 35.5 AV                 | 54.0           | -18.5       | 2.16 H             | 85                   | 23.5             | 12.0                     |
| 7                                                    | 15985.50        | 47.0 PK                 | 74.0           | -27.0       | 1.41 H             | 62                   | 36.0             | 11.0                     |
| 8                                                    | 15985.50        | 33.1 AV                 | 54.0           | -20.9       | 1.41 H             | 62                   | 22.1             | 11.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 109.4 PK                |                |             | 1.32 V             | 359                  | 108.0            | 1.4                      |
| 2                                                    | *5320.00        | 99.1 AV                 |                |             | 1.32 V             | 359                  | 97.7             | 1.4                      |
| 3                                                    | 5350.00         | 51.9 PK                 | 74.0           | -22.1       | 1.32 V             | 359                  | 50.5             | 1.4                      |
| 4                                                    | 5350.00         | 39.8 AV                 | 54.0           | -14.2       | 1.32 V             | 359                  | 38.4             | 1.4                      |
| 5                                                    | 10657.00        | 46.8 PK                 | 74.0           | -27.2       | 1.25 V             | 71                   | 34.8             | 12.0                     |
| 6                                                    | 10657.00        | 35.8 AV                 | 54.0           | -18.2       | 1.25 V             | 71                   | 23.8             | 12.0                     |
| 7                                                    | 15985.50        | 46.5 PK                 | 74.0           | -27.5       | 1.92 V             | 131                  | 35.5             | 11.0                     |
| 8                                                    | 15985.50        | 33.4 AV                 | 54.0           | -20.6       | 1.92 V             | 131                  | 22.4             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5454.00         | 51.3 PK                 | 74.0           | -22.7       | 1.39 H             | 220                  | 49.7             | 1.6                      |
| 2                                                    | 5454.00         | 38.8 AV                 | 54.0           | -15.2       | 1.39 H             | 220                  | 37.2             | 1.6                      |
| 3                                                    | #5470.00        | 51.0 PK                 | 68.2           | -17.2       | 1.39 H             | 220                  | 49.4             | 1.6                      |
| 4                                                    | *5500.00        | 107.6 PK                |                |             | 1.39 H             | 220                  | 105.9            | 1.7                      |
| 5                                                    | *5500.00        | 96.1 AV                 |                |             | 1.39 H             | 220                  | 94.4             | 1.7                      |
| 6                                                    | 10983.00        | 46.3 PK                 | 74.0           | -27.7       | 2.19 H             | 94                   | 34.0             | 12.3                     |
| 7                                                    | 10983.00        | 35.5 AV                 | 54.0           | -18.5       | 2.19 H             | 94                   | 23.2             | 12.3                     |
| 8                                                    | #16474.50       | 46.3 PK                 | 68.2           | -21.9       | 1.36 H             | 75                   | 33.1             | 13.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5451.00         | 51.3 PK                 | 74.0           | -22.7       | 1.39 V             | 359                  | 49.7             | 1.6                      |
| 2                                                    | 5451.00         | 39.8 AV                 | 54.0           | -14.2       | 1.39 V             | 359                  | 38.2             | 1.6                      |
| 3                                                    | #5462.00        | 52.1 PK                 | 68.2           | -16.1       | 1.39 V             | 359                  | 50.5             | 1.6                      |
| 4                                                    | *5500.00        | 111.1 PK                |                |             | 1.39 V             | 359                  | 109.4            | 1.7                      |
| 5                                                    | *5500.00        | 100.3 AV                |                |             | 1.39 V             | 359                  | 98.6             | 1.7                      |
| 6                                                    | 10983.00        | 46.5 PK                 | 74.0           | -27.5       | 1.21 V             | 72                   | 34.2             | 12.3                     |
| 7                                                    | 10983.00        | 35.8 AV                 | 54.0           | -18.2       | 1.21 V             | 72                   | 23.5             | 12.3                     |
| 8                                                    | #16474.50       | 45.9 PK                 | 68.2           | -22.3       | 1.87 V             | 130                  | 32.7             | 13.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 106.9 PK                |                |             | 1.33 H             | 220                  | 105.2            | 1.7                      |
| 2                                                    | *5580.00        | 95.6 AV                 |                |             | 1.33 H             | 220                  | 93.9             | 1.7                      |
| 3                                                    | 11160.00        | 46.4 PK                 | 74.0           | -27.6       | 2.09 H             | 93                   | 34.8             | 11.6                     |
| 4                                                    | 11160.00        | 35.5 AV                 | 54.0           | -18.5       | 2.09 H             | 93                   | 23.9             | 11.6                     |
| 5                                                    | #16740.00       | 46.8 PK                 | 68.2           | -21.4       | 1.41 H             | 91                   | 32.1             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 112.5 PK                |                |             | 1.39 V             | 338                  | 110.8            | 1.7                      |
| 2                                                    | *5580.00        | 102.8 AV                |                |             | 1.39 V             | 338                  | 101.1            | 1.7                      |
| 3                                                    | 11160.00        | 46.6 PK                 | 74.0           | -27.4       | 1.28 V             | 74                   | 35.0             | 11.6                     |
| 4                                                    | 11160.00        | 36.0 AV                 | 54.0           | -18.0       | 1.28 V             | 74                   | 24.4             | 11.6                     |
| 5                                                    | #16740.00       | 46.3 PK                 | 68.2           | -21.9       | 1.91 V             | 124                  | 31.6             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 106.6 PK                |                |             | 1.39 H             | 228                  | 104.8            | 1.8                      |
| 2                                                    | *5700.00        | 95.5 AV                 |                |             | 1.39 H             | 228                  | 93.7             | 1.8                      |
| 3                                                    | #5725.00        | 51.9 PK                 | 68.2           | -16.3       | 1.39 H             | 228                  | 50.0             | 1.9                      |
| 4                                                    | 11417.00        | 47.2 PK                 | 74.0           | -26.8       | 2.12 H             | 68                   | 34.4             | 12.8                     |
| 5                                                    | 11417.00        | 36.3 AV                 | 54.0           | -17.7       | 2.12 H             | 68                   | 23.5             | 12.8                     |
| 6                                                    | #17125.50       | 46.9 PK                 | 68.2           | -21.3       | 1.34 H             | 73                   | 30.7             | 16.2                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5700.00        | 111.0 PK                |                |             | 1.42 V             | 346                  | 109.2            | 1.8                      |
| 2                                                  | *5700.00        | 100.0 AV                |                |             | 1.42 V             | 346                  | 98.2             | 1.8                      |
| 3                                                  | #5725.00        | 52.4 PK                 | 68.2           | -15.8       | 1.42 V             | 346                  | 50.5             | 1.9                      |
| 4                                                  | 11417.00        | 47.0 PK                 | 74.0           | -27.0       | 1.19 V             | 69                   | 34.2             | 12.8                     |
| 5                                                  | 11417.00        | 36.3 AV                 | 54.0           | -17.7       | 1.19 V             | 69                   | 23.5             | 12.8                     |
| 6                                                  | #17125.50       | 46.0 PK                 | 68.2           | -22.2       | 1.85 V             | 118                  | 29.8             | 16.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.4 PK                 | 74.0           | -22.6       | 1.33 H             | 231                  | 49.8             | 1.6                      |
| 2                                                    | 5460.00         | 39.2 AV                 | 54.0           | -14.8       | 1.33 H             | 231                  | 37.6             | 1.6                      |
| 3                                                    | #5470.00        | 52.0 PK                 | 68.2           | -16.2       | 1.33 H             | 231                  | 50.4             | 1.6                      |
| 4                                                    | *5720.00        | 107.5 PK                |                |             | 1.33 H             | 231                  | 105.6            | 1.9                      |
| 5                                                    | *5720.00        | 96.3 AV                 |                |             | 1.33 H             | 231                  | 94.4             | 1.9                      |
| 6                                                    | #5850.00        | 51.9 PK                 | 68.2           | -16.3       | 1.33 H             | 231                  | 49.6             | 2.3                      |
| 7                                                    | 11456.00        | 46.8 PK                 | 74.0           | -27.2       | 2.15 H             | 78                   | 34.2             | 12.6                     |
| 8                                                    | 11456.00        | 35.9 AV                 | 54.0           | -18.1       | 2.15 H             | 78                   | 23.3             | 12.6                     |
| 9                                                    | #17184.00       | 46.5 PK                 | 68.2           | -21.7       | 1.37 H             | 75                   | 30.6             | 15.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.6 PK                 | 74.0           | -22.4       | 1.41 V             | 359                  | 50.0             | 1.6                      |
| 2                                                    | 5460.00         | 39.5 AV                 | 54.0           | -14.5       | 1.41 V             | 359                  | 37.9             | 1.6                      |
| 3                                                    | #5470.00        | 52.2 PK                 | 68.2           | -16.0       | 1.41 V             | 359                  | 50.6             | 1.6                      |
| 4                                                    | *5720.00        | 109.4 PK                |                |             | 1.41 V             | 359                  | 107.5            | 1.9                      |
| 5                                                    | *5720.00        | 99.1 AV                 |                |             | 1.41 V             | 359                  | 97.2             | 1.9                      |
| 6                                                    | #5850.00        | 51.6 PK                 | 68.2           | -16.6       | 1.41 V             | 359                  | 49.3             | 2.3                      |
| 7                                                    | 11456.00        | 47.1 PK                 | 74.0           | -26.9       | 1.22 V             | 80                   | 34.5             | 12.6                     |
| 8                                                    | 11456.00        | 36.2 AV                 | 54.0           | -17.8       | 1.22 V             | 80                   | 23.6             | 12.6                     |
| 9                                                    | #17184.00       | 46.3 PK                 | 68.2           | -21.9       | 1.90 V             | 120                  | 30.4             | 15.9                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5628.52        | 50.8 PK                 | 68.2           | -17.4       | 1.37 H             | 228                  | 49.1             | 1.7                      |
| 2                                                    | *5745.00        | 115.9 PK                |                |             | 1.37 H             | 228                  | 114.0            | 1.9                      |
| 3                                                    | *5745.00        | 108.5 AV                |                |             | 1.37 H             | 228                  | 106.6            | 1.9                      |
| 4                                                    | #5987.18        | 51.9 PK                 | 68.2           | -16.3       | 1.37 H             | 228                  | 49.4             | 2.5                      |
| 5                                                    | 11473.00        | 51.4 PK                 | 74.0           | -22.6       | 2.14 H             | 91                   | 38.9             | 12.5                     |
| 6                                                    | 11473.00        | 41.1 AV                 | 54.0           | -12.9       | 2.14 H             | 91                   | 28.6             | 12.5                     |
| 7                                                    | #17209.50       | 52.8 PK                 | 68.2           | -15.4       | 1.32 H             | 64                   | 37.0             | 15.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5578.43        | 51.6 PK                 | 68.2           | -16.6       | 1.43 V             | 359                  | 49.9             | 1.7                      |
| 2                                                  | *5745.00        | 118.7 PK                |                |             | 1.43 V             | 359                  | 116.8            | 1.9                      |
| 3                                                  | *5745.00        | 113.7 AV                |                |             | 1.43 V             | 359                  | 111.8            | 1.9                      |
| 4                                                  | #5952.17        | 52.6 PK                 | 68.2           | -15.6       | 1.43 V             | 359                  | 50.1             | 2.5                      |
| 5                                                  | 11473.00        | 50.3 PK                 | 74.0           | -23.7       | 1.25 V             | 80                   | 37.8             | 12.5                     |
| 6                                                  | 11473.00        | 40.3 AV                 | 54.0           | -13.7       | 1.25 V             | 80                   | 27.8             | 12.5                     |
| 7                                                  | #17209.50       | 57.9 PK                 | 68.2           | -10.3       | 1.95 V             | 112                  | 42.1             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5551.92        | 51.0 PK                 | 68.2           | -17.2       | 1.31 H             | 218                  | 49.3             | 1.7                      |
| 2                                                    | *5785.00        | 115.6 PK                |                |             | 1.31 H             | 218                  | 113.6            | 2.0                      |
| 3                                                    | *5785.00        | 108.3 AV                |                |             | 1.31 H             | 218                  | 106.3            | 2.0                      |
| 4                                                    | #5974.96        | 51.9 PK                 | 68.2           | -16.3       | 1.31 H             | 218                  | 49.4             | 2.5                      |
| 5                                                    | 11570.00        | 51.9 PK                 | 74.0           | -22.1       | 2.14 H             | 81                   | 39.0             | 12.9                     |
| 6                                                    | 11570.00        | 41.5 AV                 | 54.0           | -12.5       | 2.14 H             | 81                   | 28.6             | 12.9                     |
| 7                                                    | #17355.00       | 52.9 PK                 | 68.2           | -15.3       | 1.37 H             | 60                   | 36.1             | 16.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5566.51        | 51.0 PK                 | 68.2           | -17.2       | 1.39 V             | 340                  | 49.3             | 1.7                      |
| 2                                                  | *5785.00        | 118.6 PK                |                |             | 1.39 V             | 340                  | 116.6            | 2.0                      |
| 3                                                  | *5785.00        | 113.5 AV                |                |             | 1.39 V             | 340                  | 111.5            | 2.0                      |
| 4                                                  | #5980.27        | 52.9 PK                 | 68.2           | -15.3       | 1.39 V             | 340                  | 50.4             | 2.5                      |
| 5                                                  | 11570.00        | 49.7 PK                 | 74.0           | -24.3       | 1.25 V             | 80                   | 36.8             | 12.9                     |
| 6                                                  | 11570.00        | 39.8 AV                 | 54.0           | -14.2       | 1.25 V             | 80                   | 26.9             | 12.9                     |
| 7                                                  | #17355.00       | 57.8 PK                 | 68.2           | -10.4       | 1.89 V             | 97                   | 41.0             | 16.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5556.90        | 50.5 PK                 | 68.2           | -17.7       | 1.36 H             | 233                  | 48.8             | 1.7                      |
| 2                                                    | *5825.00        | 115.9 PK                |                |             | 1.36 H             | 233                  | 113.7            | 2.2                      |
| 3                                                    | *5825.00        | 110.1 AV                |                |             | 1.36 H             | 233                  | 107.9            | 2.2                      |
| 4                                                    | #5953.05        | 51.8 PK                 | 68.2           | -16.4       | 1.36 H             | 233                  | 49.3             | 2.5                      |
| 5                                                    | 11666.80        | 51.8 PK                 | 74.0           | -22.2       | 2.10 H             | 101                  | 38.9             | 12.9                     |
| 6                                                    | 11666.80        | 41.3 AV                 | 54.0           | -12.7       | 2.10 H             | 101                  | 28.4             | 12.9                     |
| 7                                                    | #17500.20       | 53.1 PK                 | 68.2           | -15.1       | 1.29 H             | 75                   | 33.9             | 19.2                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5553.70        | 51.7 PK                 | 68.2           | -16.5       | 1.48 V             | 336                  | 50.0             | 1.7                      |
| 2                                                  | *5825.00        | 119.1 PK                |                |             | 1.48 V             | 336                  | 116.9            | 2.2                      |
| 3                                                  | *5825.00        | 114.2 AV                |                |             | 1.48 V             | 336                  | 112.0            | 2.2                      |
| 4                                                  | #5986.22        | 52.2 PK                 | 68.2           | -16.0       | 1.48 V             | 336                  | 49.7             | 2.5                      |
| 5                                                  | 11666.80        | 50.6 PK                 | 74.0           | -23.4       | 1.29 V             | 76                   | 37.7             | 12.9                     |
| 6                                                  | 11666.80        | 40.7 AV                 | 54.0           | -13.3       | 1.29 V             | 76                   | 27.8             | 12.9                     |
| 7                                                  | #17500.20       | 57.6 PK                 | 68.2           | -10.6       | 2.00 V             | 118                  | 38.4             | 19.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



# 802.11ax (RU52)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.7 PK                 | 74.0           | -22.3       | 1.13 H             | 218                  | 50.0             | 1.7                      |
| 2                                                    | 5150.00         | 39.0 AV                 | 54.0           | -15.0       | 1.13 H             | 218                  | 37.3             | 1.7                      |
| 3                                                    | *5180.00        | 105.0 PK                |                |             | 1.13 H             | 218                  | 103.5            | 1.5                      |
| 4                                                    | *5180.00        | 93.7 AV                 |                |             | 1.13 H             | 218                  | 92.2             | 1.5                      |
| 5                                                    | #10345.00       | 46.7 PK                 | 68.2           | -21.5       | 2.10 H             | 81                   | 35.6             | 11.1                     |
| 6                                                    | 15517.50        | 46.4 PK                 | 74.0           | -27.6       | 1.33 H             | 62                   | 34.7             | 11.7                     |
| 7                                                    | 15517.50        | 32.6 AV                 | 54.0           | -21.4       | 1.33 H             | 62                   | 20.9             | 11.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 52.3 PK                 | 74.0           | -21.7       | 1.16 V             | 342                  | 50.6             | 1.7                      |
| 2                                                    | 5150.00         | 40.1 AV                 | 54.0           | -13.9       | 1.16 V             | 342                  | 38.4             | 1.7                      |
| 3                                                    | *5180.00        | 110.0 PK                |                |             | 1.16 V             | 342                  | 108.5            | 1.5                      |
| 4                                                    | *5180.00        | 100.2 AV                |                |             | 1.16 V             | 342                  | 98.7             | 1.5                      |
| 5                                                    | #10345.00       | 47.5 PK                 | 68.2           | -20.7       | 1.19 V             | 91                   | 36.4             | 11.1                     |
| 6                                                    | 15517.50        | 46.7 PK                 | 74.0           | -27.3       | 1.94 V             | 105                  | 35.0             | 11.7                     |
| 7                                                    | 15517.50        | 33.2 AV                 | 54.0           | -20.8       | 1.94 V             | 105                  | 21.5             | 11.7                     |

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.9 PK                 | 74.0           | -22.1       | 1.13 H             | 211                  | 50.2             | 1.7                      |
| 2                                                    | 5150.00         | 39.0 AV                 | 54.0           | -15.0       | 1.13 H             | 211                  | 37.3             | 1.7                      |
| 3                                                    | *5200.00        | 104.9 PK                |                |             | 1.13 H             | 211                  | 103.5            | 1.4                      |
| 4                                                    | *5200.00        | 93.7 AV                 |                |             | 1.13 H             | 211                  | 92.3             | 1.4                      |
| 5                                                    | #10406.00       | 46.6 PK                 | 68.2           | -21.6       | 2.14 H             | 91                   | 35.1             | 11.5                     |
| 6                                                    | 15609.00        | 46.8 PK                 | 74.0           | -27.2       | 1.43 H             | 82                   | 35.3             | 11.5                     |
| 7                                                    | 15609.00        | 33.1 AV                 | 54.0           | -20.9       | 1.43 H             | 82                   | 21.6             | 11.5                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 52.3 PK                 | 74.0           | -21.7       | 1.16 V             | 333                  | 50.6             | 1.7                      |
| 2                                                  | 5150.00         | 40.3 AV                 | 54.0           | -13.7       | 1.16 V             | 333                  | 38.6             | 1.7                      |
| 3                                                  | *5200.00        | 110.2 PK                |                |             | 1.16 V             | 333                  | 108.8            | 1.4                      |
| 4                                                  | *5200.00        | 99.8 AV                 |                |             | 1.16 V             | 333                  | 98.4             | 1.4                      |
| 5                                                  | #10406.00       | 47.1 PK                 | 68.2           | -21.1       | 1.24 V             | 75                   | 35.6             | 11.5                     |
| 6                                                  | 15609.00        | 46.5 PK                 | 74.0           | -27.5       | 1.95 V             | 121                  | 35.0             | 11.5                     |
| 7                                                  | 15609.00        | 33.1 AV                 | 54.0           | -20.9       | 1.95 V             | 121                  | 21.6             | 11.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.2 PK                 | 74.0           | -22.8       | 1.18 H             | 212                  | 49.5             | 1.7                      |
| 2                                                    | 5150.00         | 38.6 AV                 | 54.0           | -15.4       | 1.18 H             | 212                  | 36.9             | 1.7                      |
| 3                                                    | *5240.00        | 105.2 PK                |                |             | 1.18 H             | 212                  | 104.0            | 1.2                      |
| 4                                                    | *5240.00        | 93.6 AV                 |                |             | 1.18 H             | 212                  | 92.4             | 1.2                      |
| 5                                                    | #10494.00       | 47.3 PK                 | 68.2           | -20.9       | 2.18 H             | 62                   | 35.9             | 11.4                     |
| 6                                                    | 15741.00        | 46.4 PK                 | 74.0           | -27.6       | 1.38 H             | 91                   | 35.4             | 11.0                     |
| 7                                                    | 15741.00        | 32.5 AV                 | 54.0           | -21.5       | 1.38 H             | 91                   | 21.5             | 11.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 52.8 PK                 | 74.0           | -21.2       | 1.20 V             | 327                  | 51.1             | 1.7                      |
| 2                                                    | 5150.00         | 40.5 AV                 | 54.0           | -13.5       | 1.20 V             | 327                  | 38.8             | 1.7                      |
| 3                                                    | *5240.00        | 110.4 PK                |                |             | 1.20 V             | 327                  | 109.2            | 1.2                      |
| 4                                                    | *5240.00        | 99.9 AV                 |                |             | 1.20 V             | 327                  | 98.7             | 1.2                      |
| 5                                                    | #10494.00       | 46.9 PK                 | 68.2           | -21.3       | 1.19 V             | 77                   | 35.5             | 11.4                     |
| 6                                                    | 15741.00        | 45.6 PK                 | 74.0           | -28.4       | 1.93 V             | 112                  | 34.6             | 11.0                     |
| 7                                                    | 15741.00        | 32.5 AV                 | 54.0           | -21.5       | 1.93 V             | 112                  | 21.5             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 106.6 PK                |                |             | 1.12 H             | 222                  | 105.4            | 1.2                      |
| 2                                                    | *5260.00        | 95.8 AV                 |                |             | 1.12 H             | 222                  | 94.6             | 1.2                      |
| 3                                                    | 5350.00         | 52.1 PK                 | 74.0           | -21.9       | 1.12 H             | 222                  | 50.7             | 1.4                      |
| 4                                                    | 5350.00         | 39.4 AV                 | 54.0           | -14.6       | 1.12 H             | 222                  | 38.0             | 1.4                      |
| 5                                                    | #10505.00       | 47.3 PK                 | 68.2           | -20.9       | 2.13 H             | 68                   | 35.9             | 11.4                     |
| 6                                                    | 15757.50        | 46.7 PK                 | 74.0           | -27.3       | 1.36 H             | 68                   | 35.9             | 10.8                     |
| 7                                                    | 15757.50        | 33.2 AV                 | 54.0           | -20.8       | 1.36 H             | 68                   | 22.4             | 10.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5260.00        | 109.8 PK                |                |             | 1.15 V             | 330                  | 108.6            | 1.2                      |
| 2                                                  | *5260.00        | 99.6 AV                 |                |             | 1.15 V             | 330                  | 98.4             | 1.2                      |
| 3                                                  | 5350.00         | 52.6 PK                 | 74.0           | -21.4       | 1.15 V             | 330                  | 51.2             | 1.4                      |
| 4                                                  | 5350.00         | 40.2 AV                 | 54.0           | -13.8       | 1.15 V             | 330                  | 38.8             | 1.4                      |
| 5                                                  | #10505.00       | 46.9 PK                 | 68.2           | -21.3       | 1.17 V             | 75                   | 35.5             | 11.4                     |
| 6                                                  | 15757.50        | 46.3 PK                 | 74.0           | -27.7       | 1.92 V             | 106                  | 35.5             | 10.8                     |
| 7                                                  | 15757.50        | 33.0 AV                 | 54.0           | -21.0       | 1.92 V             | 106                  | 22.2             | 10.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 60 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 106.2 PK                |                |             | 1.07 H             | 209                  | 105.0            | 1.2                      |
| 2                                                    | *5300.00        | 95.5 AV                 |                |             | 1.07 H             | 209                  | 94.3             | 1.2                      |
| 3                                                    | 5350.00         | 51.4 PK                 | 74.0           | -22.6       | 1.07 H             | 209                  | 50.0             | 1.4                      |
| 4                                                    | 5350.00         | 38.9 AV                 | 54.0           | -15.1       | 1.07 H             | 209                  | 37.5             | 1.4                      |
| 5                                                    | 10606.00        | 47.3 PK                 | 74.0           | -26.7       | 2.12 H             | 78                   | 35.5             | 11.8                     |
| 6                                                    | 10606.00        | 36.3 AV                 | 54.0           | -17.7       | 2.12 H             | 78                   | 24.5             | 11.8                     |
| 7                                                    | 15909.00        | 46.4 PK                 | 74.0           | -27.6       | 1.36 H             | 78                   | 35.7             | 10.7                     |
| 8                                                    | 15909.00        | 32.9 AV                 | 54.0           | -21.1       | 1.36 H             | 78                   | 22.2             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 110.1 PK                |                |             | 1.16 V             | 337                  | 108.9            | 1.2                      |
| 2                                                    | *5300.00        | 99.8 AV                 |                |             | 1.16 V             | 337                  | 98.6             | 1.2                      |
| 3                                                    | 5350.00         | 52.2 PK                 | 74.0           | -21.8       | 1.16 V             | 337                  | 50.8             | 1.4                      |
| 4                                                    | 5350.00         | 40.1 AV                 | 54.0           | -13.9       | 1.16 V             | 337                  | 38.7             | 1.4                      |
| 5                                                    | 10606.00        | 47.1 PK                 | 74.0           | -26.9       | 1.16 V             | 64                   | 35.3             | 11.8                     |
| 6                                                    | 10606.00        | 35.9 AV                 | 54.0           | -18.1       | 1.16 V             | 64                   | 24.1             | 11.8                     |
| 7                                                    | 15909.00        | 46.4 PK                 | 74.0           | -27.6       | 1.90 V             | 114                  | 35.7             | 10.7                     |
| 8                                                    | 15909.00        | 33.0 AV                 | 54.0           | -21.0       | 1.90 V             | 114                  | 22.3             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 64 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 106.3 PK                |                |             | 1.14 H             | 218                  | 104.9            | 1.4                      |
| 2                                                    | *5320.00        | 95.6 AV                 |                |             | 1.14 H             | 218                  | 94.2             | 1.4                      |
| 3                                                    | 5350.00         | 50.0 PK                 | 74.0           | -24.0       | 1.14 H             | 218                  | 48.6             | 1.4                      |
| 4                                                    | 5350.00         | 38.7 AV                 | 54.0           | -15.3       | 1.14 H             | 218                  | 37.3             | 1.4                      |
| 5                                                    | 10654.00        | 47.3 PK                 | 74.0           | -26.7       | 2.10 H             | 78                   | 35.3             | 12.0                     |
| 6                                                    | 10654.00        | 36.1 AV                 | 54.0           | -17.9       | 2.10 H             | 78                   | 24.1             | 12.0                     |
| 7                                                    | 15981.00        | 47.1 PK                 | 74.0           | -26.9       | 1.32 H             | 61                   | 36.1             | 11.0                     |
| 8                                                    | 15981.00        | 33.2 AV                 | 54.0           | -20.8       | 1.32 H             | 61                   | 22.2             | 11.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 109.8 PK                |                |             | 1.20 V             | 330                  | 108.4            | 1.4                      |
| 2                                                    | *5320.00        | 99.7 AV                 |                |             | 1.20 V             | 330                  | 98.3             | 1.4                      |
| 3                                                    | 5350.00         | 50.5 PK                 | 74.0           | -23.5       | 1.20 V             | 330                  | 49.1             | 1.4                      |
| 4                                                    | 5350.00         | 39.1 AV                 | 54.0           | -14.9       | 1.20 V             | 330                  | 37.7             | 1.4                      |
| 5                                                    | 10654.00        | 47.5 PK                 | 74.0           | -26.5       | 1.22 V             | 73                   | 35.5             | 12.0                     |
| 6                                                    | 10654.00        | 36.7 AV                 | 54.0           | -17.3       | 1.22 V             | 73                   | 24.7             | 12.0                     |
| 7                                                    | 15981.00        | 46.3 PK                 | 74.0           | -27.7       | 1.90 V             | 126                  | 35.3             | 11.0                     |
| 8                                                    | 15981.00        | 33.0 AV                 | 54.0           | -21.0       | 1.90 V             | 126                  | 22.0             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                        |                |                          |              |
|------------------------|----------------|--------------------------|--------------|
| <b>Channel</b>         | TX Channel 100 | <b>Detector Function</b> | Peak (PK)    |
| <b>Frequency Range</b> | 1GHz ~ 40GHz   |                          | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5450.00         | 52.0 PK                 | 74.0           | -22.0       | 1.19 H             | 204                  | 50.4             | 1.6                      |
| 2                                                    | 5450.00         | 39.2 AV                 | 54.0           | -14.8       | 1.19 H             | 204                  | 37.6             | 1.6                      |
| 3                                                    | #5470.00        | 50.6 PK                 | 68.2           | -17.6       | 1.19 H             | 204                  | 49.0             | 1.6                      |
| 4                                                    | *5500.00        | 104.6 PK                |                |             | 1.19 H             | 204                  | 102.9            | 1.7                      |
| 5                                                    | *5500.00        | 95.3 AV                 |                |             | 1.19 H             | 204                  | 93.6             | 1.7                      |
| 6                                                    | 10985.00        | 46.5 PK                 | 74.0           | -27.5       | 2.10 H             | 79                   | 34.3             | 12.2                     |
| 7                                                    | 10985.00        | 35.5 AV                 | 54.0           | -18.5       | 2.10 H             | 79                   | 23.3             | 12.2                     |
| 8                                                    | #16477.50       | 46.5 PK                 | 68.2           | -21.7       | 1.39 H             | 73                   | 33.3             | 13.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.5 PK                 | 74.0           | -22.5       | 1.13 V             | 344                  | 49.9             | 1.6                      |
| 2                                                    | 5460.00         | 39.6 AV                 | 54.0           | -14.4       | 1.13 V             | 344                  | 38.0             | 1.6                      |
| 3                                                    | #5464.00        | 51.1 PK                 | 68.2           | -17.1       | 1.13 V             | 344                  | 49.5             | 1.6                      |
| 4                                                    | *5500.00        | 110.9 PK                |                |             | 1.13 V             | 344                  | 109.2            | 1.7                      |
| 5                                                    | *5500.00        | 100.2 AV                |                |             | 1.13 V             | 344                  | 98.5             | 1.7                      |
| 6                                                    | 10985.00        | 47.4 PK                 | 74.0           | -26.6       | 1.17 V             | 91                   | 35.2             | 12.2                     |
| 7                                                    | 10985.00        | 36.3 AV                 | 54.0           | -17.7       | 1.17 V             | 91                   | 24.1             | 12.2                     |
| 8                                                    | #16477.50       | 46.1 PK                 | 68.2           | -22.1       | 1.89 V             | 127                  | 32.9             | 13.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 104.9 PK                |                |             | 1.19 H             | 213                  | 103.2            | 1.7                      |
| 2                                                    | *5580.00        | 95.4 AV                 |                |             | 1.19 H             | 213                  | 93.7             | 1.7                      |
| 3                                                    | 11166.00        | 47.1 PK                 | 74.0           | -26.9       | 2.11 H             | 94                   | 35.5             | 11.6                     |
| 4                                                    | 11166.00        | 36.3 AV                 | 54.0           | -17.7       | 2.11 H             | 94                   | 24.7             | 11.6                     |
| 5                                                    | #16749.00       | 46.0 PK                 | 68.2           | -22.2       | 1.34 H             | 81                   | 31.3             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 109.5 PK                |                |             | 1.11 V             | 337                  | 107.8            | 1.7                      |
| 2                                                    | *5580.00        | 99.3 AV                 |                |             | 1.11 V             | 337                  | 97.6             | 1.7                      |
| 3                                                    | 11166.00        | 47.3 PK                 | 74.0           | -26.7       | 1.24 V             | 67                   | 35.7             | 11.6                     |
| 4                                                    | 11166.00        | 36.7 AV                 | 54.0           | -17.3       | 1.24 V             | 67                   | 25.1             | 11.6                     |
| 5                                                    | #16749.00       | 46.0 PK                 | 68.2           | -22.2       | 1.91 V             | 115                  | 31.3             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 104.5 PK                |                |             | 1.21 H             | 190                  | 102.7            | 1.8                      |
| 2                                                    | *5700.00        | 95.0 AV                 |                |             | 1.21 H             | 190                  | 93.2             | 1.8                      |
| 3                                                    | #5725.00        | 52.8 PK                 | 68.2           | -15.4       | 1.21 H             | 190                  | 50.9             | 1.9                      |
| 4                                                    | 11415.00        | 46.4 PK                 | 74.0           | -27.6       | 2.16 H             | 95                   | 33.6             | 12.8                     |
| 5                                                    | 11415.00        | 35.9 AV                 | 54.0           | -18.1       | 2.16 H             | 95                   | 23.1             | 12.8                     |
| 6                                                    | #17122.50       | 46.0 PK                 | 68.2           | -22.2       | 1.37 H             | 68                   | 29.8             | 16.2                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5700.00        | 109.7 PK                |                |             | 1.13 V             | 328                  | 107.9            | 1.8                      |
| 2                                                  | *5700.00        | 99.6 AV                 |                |             | 1.13 V             | 328                  | 97.8             | 1.8                      |
| 3                                                  | #5725.00        | 53.1 PK                 | 68.2           | -15.1       | 1.13 V             | 328                  | 51.2             | 1.9                      |
| 4                                                  | 11415.00        | 47.7 PK                 | 74.0           | -26.3       | 1.28 V             | 63                   | 34.9             | 12.8                     |
| 5                                                  | 11415.00        | 37.0 AV                 | 54.0           | -17.0       | 1.28 V             | 63                   | 24.2             | 12.8                     |
| 6                                                  | #17122.50       | 46.8 PK                 | 68.2           | -21.4       | 1.92 V             | 133                  | 30.6             | 16.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.5 PK                 | 74.0           | -22.5       | 1.16 H             | 215                  | 49.9             | 1.6                      |
| 2                                                    | 5460.00         | 39.8 AV                 | 54.0           | -14.2       | 1.16 H             | 215                  | 38.2             | 1.6                      |
| 3                                                    | #5470.00        | 52.3 PK                 | 68.2           | -15.9       | 1.16 H             | 215                  | 50.7             | 1.6                      |
| 4                                                    | *5720.00        | 104.6 PK                |                |             | 1.16 H             | 215                  | 102.7            | 1.9                      |
| 5                                                    | *5720.00        | 95.4 AV                 |                |             | 1.16 H             | 215                  | 93.5             | 1.9                      |
| 6                                                    | #5850.00        | 51.3 PK                 | 68.2           | -16.9       | 1.16 H             | 215                  | 49.0             | 2.3                      |
| 7                                                    | 11455.00        | 47.3 PK                 | 74.0           | -26.7       | 2.21 H             | 67                   | 34.7             | 12.6                     |
| 8                                                    | 11455.00        | 36.4 AV                 | 54.0           | -17.6       | 2.21 H             | 67                   | 23.8             | 12.6                     |
| 9                                                    | #17182.50       | 46.8 PK                 | 68.2           | -21.4       | 1.38 H             | 68                   | 30.9             | 15.9                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5460.00         | 51.5 PK                 | 74.0           | -22.5       | 1.18 V             | 332                  | 49.9             | 1.6                      |
| 2                                                  | 5460.00         | 39.5 AV                 | 54.0           | -14.5       | 1.18 V             | 332                  | 37.9             | 1.6                      |
| 3                                                  | #5470.00        | 52.6 PK                 | 68.2           | -15.6       | 1.18 V             | 332                  | 51.0             | 1.6                      |
| 4                                                  | *5720.00        | 109.5 PK                |                |             | 1.18 V             | 332                  | 107.6            | 1.9                      |
| 5                                                  | *5720.00        | 99.4 AV                 |                |             | 1.18 V             | 332                  | 97.5             | 1.9                      |
| 6                                                  | #5850.00        | 51.3 PK                 | 68.2           | -16.9       | 1.18 V             | 332                  | 49.0             | 2.3                      |
| 7                                                  | 11455.00        | 50.0 PK                 | 74.0           | -24.0       | 1.25 V             | 58                   | 37.4             | 12.6                     |
| 8                                                  | 11455.00        | 39.6 AV                 | 54.0           | -14.4       | 1.25 V             | 58                   | 27.0             | 12.6                     |
| 9                                                  | #17182.50       | 57.5 PK                 | 68.2           | -10.7       | 1.93 V             | 90                   | 41.6             | 15.9                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5591.63        | 50.4 PK                 | 68.2           | -17.8       | 1.12 H             | 221                  | 48.8             | 1.6                      |
| 2                                                    | *5745.00        | 114.6 PK                |                |             | 1.12 H             | 221                  | 112.7            | 1.9                      |
| 3                                                    | *5745.00        | 106.8 AV                |                |             | 1.12 H             | 221                  | 104.9            | 1.9                      |
| 4                                                    | #5977.74        | 53.5 PK                 | 68.2           | -14.7       | 1.12 H             | 221                  | 51.0             | 2.5                      |
| 5                                                    | 11475.00        | 51.0 PK                 | 74.0           | -23.0       | 2.09 H             | 100                  | 38.5             | 12.5                     |
| 6                                                    | 11475.00        | 41.0 AV                 | 54.0           | -13.0       | 2.09 H             | 100                  | 28.5             | 12.5                     |
| 7                                                    | #17212.50       | 52.4 PK                 | 68.2           | -15.8       | 1.32 H             | 53                   | 36.6             | 15.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5571.15        | 50.7 PK                 | 68.2           | -17.5       | 1.13 V             | 340                  | 49.0             | 1.7                      |
| 2                                                    | *5745.00        | 118.5 PK                |                |             | 1.13 V             | 340                  | 116.6            | 1.9                      |
| 3                                                    | *5745.00        | 111.3 AV                |                |             | 1.13 V             | 340                  | 109.4            | 1.9                      |
| 4                                                    | #5970.30        | 53.0 PK                 | 68.2           | -15.2       | 1.13 V             | 340                  | 50.5             | 2.5                      |
| 5                                                    | 11475.00        | 50.1 PK                 | 74.0           | -23.9       | 1.28 V             | 68                   | 37.6             | 12.5                     |
| 6                                                    | 11475.00        | 40.0 AV                 | 54.0           | -14.0       | 1.28 V             | 68                   | 27.5             | 12.5                     |
| 7                                                    | #17212.50       | 57.3 PK                 | 68.2           | -10.9       | 1.97 V             | 104                  | 41.5             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5595.35        | 51.0 PK                 | 68.2           | -17.2       | 1.14 H             | 210                  | 49.4             | 1.6                      |
| 2                                                    | *5785.00        | 113.1 PK                |                |             | 1.14 H             | 210                  | 111.1            | 2.0                      |
| 3                                                    | *5785.00        | 107.2 AV                |                |             | 1.14 H             | 210                  | 105.2            | 2.0                      |
| 4                                                    | #5942.58        | 52.3 PK                 | 68.2           | -15.9       | 1.14 H             | 210                  | 49.9             | 2.4                      |
| 5                                                    | 11576.00        | 51.3 PK                 | 74.0           | -22.7       | 2.16 H             | 91                   | 38.4             | 12.9                     |
| 6                                                    | 11576.00        | 40.8 AV                 | 54.0           | -13.2       | 2.16 H             | 91                   | 27.9             | 12.9                     |
| 7                                                    | #17364.00       | 52.4 PK                 | 68.2           | -15.8       | 1.30 H             | 75                   | 35.5             | 16.9                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5563.45        | 51.5 PK                 | 68.2           | -16.7       | 1.16 V             | 357                  | 49.8             | 1.7                      |
| 2                                                  | *5785.00        | 118.3 PK                |                |             | 1.16 V             | 357                  | 116.3            | 2.0                      |
| 3                                                  | *5785.00        | 111.0 AV                |                |             | 1.16 V             | 357                  | 109.0            | 2.0                      |
| 4                                                  | #5995.40        | 51.6 PK                 | 68.2           | -16.6       | 1.16 V             | 357                  | 49.0             | 2.6                      |
| 5                                                  | 11576.00        | 50.9 PK                 | 74.0           | -23.1       | 1.25 V             | 80                   | 38.0             | 12.9                     |
| 6                                                  | 11576.00        | 40.7 AV                 | 54.0           | -13.3       | 1.25 V             | 80                   | 27.8             | 12.9                     |
| 7                                                  | #17364.00       | 57.7 PK                 | 68.2           | -10.5       | 1.95 V             | 123                  | 40.8             | 16.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5554.06        | 52.1 PK                 | 68.2           | -16.1       | 1.14 H             | 210                  | 50.4             | 1.7                      |
| 2                                                    | *5825.00        | 114.3 PK                |                |             | 1.14 H             | 210                  | 112.1            | 2.2                      |
| 3                                                    | *5825.00        | 107.8 AV                |                |             | 1.14 H             | 210                  | 105.6            | 2.2                      |
| 4                                                    | #6022.16        | 53.3 PK                 | 68.2           | -14.9       | 1.14 H             | 210                  | 50.8             | 2.5                      |
| 5                                                    | 11665.00        | 51.1 PK                 | 74.0           | -22.9       | 2.14 H             | 86                   | 38.2             | 12.9                     |
| 6                                                    | 11665.00        | 40.7 AV                 | 54.0           | -13.3       | 2.14 H             | 86                   | 27.8             | 12.9                     |
| 7                                                    | #17497.50       | 53.3 PK                 | 68.2           | -14.9       | 1.37 H             | 73                   | 34.3             | 19.0                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5591.93        | 51.4 PK                 | 68.2           | -16.8       | 1.14 V             | 342                  | 49.8             | 1.6                      |
| 2                                                  | *5825.00        | 118.4 PK                |                |             | 1.14 V             | 342                  | 116.2            | 2.2                      |
| 3                                                  | *5825.00        | 111.5 AV                |                |             | 1.14 V             | 342                  | 109.3            | 2.2                      |
| 4                                                  | #5937.98        | 53.0 PK                 | 68.2           | -15.2       | 1.14 V             | 342                  | 50.6             | 2.4                      |
| 5                                                  | 11665.00        | 50.2 PK                 | 74.0           | -23.8       | 1.22 V             | 74                   | 37.3             | 12.9                     |
| 6                                                  | 11665.00        | 40.4 AV                 | 54.0           | -13.6       | 1.22 V             | 74                   | 27.5             | 12.9                     |
| 7                                                  | #17497.50       | 58.0 PK                 | 68.2           | -10.2       | 1.95 V             | 105                  | 39.0             | 19.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

# 802.11ax (RU106)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.7 PK                 | 74.0           | -22.3       | 1.10 H             | 218                  | 50.0             | 1.7                      |
| 2                                                    | 5150.00         | 39.6 AV                 | 54.0           | -14.4       | 1.10 H             | 218                  | 37.9             | 1.7                      |
| 3                                                    | *5180.00        | 104.0 PK                |                |             | 1.10 H             | 218                  | 102.5            | 1.5                      |
| 4                                                    | *5180.00        | 92.5 AV                 |                |             | 1.10 H             | 218                  | 91.0             | 1.5                      |
| 5                                                    | #10350.00       | 46.4 PK                 | 68.2           | -21.8       | 2.14 H             | 66                   | 35.3             | 11.1                     |
| 6                                                    | 15525.00        | 47.0 PK                 | 74.0           | -27.0       | 1.40 H             | 84                   | 35.3             | 11.7                     |
| 7                                                    | 15525.00        | 33.3 AV                 | 54.0           | -20.7       | 1.40 H             | 84                   | 21.6             | 11.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 51.7 PK                 | 74.0           | -22.3       | 1.15 V             | 349                  | 50.0             | 1.7                      |
| 2                                                  | 5150.00         | 40.6 AV                 | 54.0           | -13.4       | 1.15 V             | 349                  | 38.9             | 1.7                      |
| 3                                                  | *5180.00        | 109.5 PK                |                |             | 1.15 V             | 349                  | 108.0            | 1.5                      |
| 4                                                  | *5180.00        | 98.5 AV                 |                |             | 1.15 V             | 349                  | 97.0             | 1.5                      |
| 5                                                  | #10350.00       | 47.6 PK                 | 68.2           | -20.6       | 1.21 V             | 69                   | 36.5             | 11.1                     |
| 6                                                  | 15525.00        | 46.8 PK                 | 74.0           | -27.2       | 1.85 V             | 137                  | 35.1             | 11.7                     |
| 7                                                  | 15525.00        | 33.3 AV                 | 54.0           | -20.7       | 1.85 V             | 137                  | 21.6             | 11.7                     |

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.9 PK                 | 74.0           | -22.1       | 1.11 H             | 215                  | 50.2             | 1.7                      |
| 2                                                    | 5150.00         | 39.9 AV                 | 54.0           | -14.1       | 1.11 H             | 215                  | 38.2             | 1.7                      |
| 3                                                    | *5200.00        | 104.2 PK                |                |             | 1.11 H             | 215                  | 102.8            | 1.4                      |
| 4                                                    | *5200.00        | 92.8 AV                 |                |             | 1.11 H             | 215                  | 91.4             | 1.4                      |
| 5                                                    | #10390.00       | 46.4 PK                 | 68.2           | -21.8       | 2.20 H             | 65                   | 34.9             | 11.5                     |
| 6                                                    | 15585.00        | 46.3 PK                 | 74.0           | -27.7       | 1.33 H             | 69                   | 34.7             | 11.6                     |
| 7                                                    | 15585.00        | 32.9 AV                 | 54.0           | -21.1       | 1.33 H             | 69                   | 21.3             | 11.6                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 51.2 PK                 | 74.0           | -22.8       | 1.21 V             | 340                  | 49.5             | 1.7                      |
| 2                                                  | 5150.00         | 40.3 AV                 | 54.0           | -13.7       | 1.21 V             | 340                  | 38.6             | 1.7                      |
| 3                                                  | *5200.00        | 109.4 PK                |                |             | 1.21 V             | 340                  | 108.0            | 1.4                      |
| 4                                                  | *5200.00        | 98.6 AV                 |                |             | 1.21 V             | 340                  | 97.2             | 1.4                      |
| 5                                                  | #10390.00       | 48.2 PK                 | 68.2           | -20.0       | 1.16 V             | 75                   | 36.7             | 11.5                     |
| 6                                                  | 15585.00        | 46.2 PK                 | 74.0           | -27.8       | 1.87 V             | 131                  | 34.6             | 11.6                     |
| 7                                                  | 15585.00        | 33.2 AV                 | 54.0           | -20.8       | 1.87 V             | 131                  | 21.6             | 11.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 52.4 PK                 | 74.0           | -21.6       | 1.12 H             | 212                  | 50.7             | 1.7                      |
| 2                                                    | 5150.00         | 40.1 AV                 | 54.0           | -13.9       | 1.12 H             | 212                  | 38.4             | 1.7                      |
| 3                                                    | *5240.00        | 104.4 PK                |                |             | 1.12 H             | 212                  | 103.2            | 1.2                      |
| 4                                                    | *5240.00        | 92.7 AV                 |                |             | 1.12 H             | 212                  | 91.5             | 1.2                      |
| 5                                                    | #10490.00       | 47.0 PK                 | 68.2           | -21.2       | 2.20 H             | 91                   | 35.6             | 11.4                     |
| 6                                                    | 15735.00        | 46.8 PK                 | 74.0           | -27.2       | 1.39 H             | 79                   | 35.8             | 11.0                     |
| 7                                                    | 15735.00        | 33.1 AV                 | 54.0           | -20.9       | 1.39 H             | 79                   | 22.1             | 11.0                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 51.2 PK                 | 74.0           | -22.8       | 1.20 V             | 359                  | 49.5             | 1.7                      |
| 2                                                  | 5150.00         | 40.1 AV                 | 54.0           | -13.9       | 1.20 V             | 359                  | 38.4             | 1.7                      |
| 3                                                  | *5240.00        | 109.1 PK                |                |             | 1.20 V             | 359                  | 107.9            | 1.2                      |
| 4                                                  | *5240.00        | 98.2 AV                 |                |             | 1.20 V             | 359                  | 97.0             | 1.2                      |
| 5                                                  | #10490.00       | 47.2 PK                 | 68.2           | -21.0       | 1.27 V             | 71                   | 35.8             | 11.4                     |
| 6                                                  | 15735.00        | 46.9 PK                 | 74.0           | -27.1       | 1.95 V             | 141                  | 35.9             | 11.0                     |
| 7                                                  | 15735.00        | 33.3 AV                 | 54.0           | -20.7       | 1.95 V             | 141                  | 22.3             | 11.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 102.9 PK                |                |             | 1.20 H             | 207                  | 101.7            | 1.2                      |
| 2                                                    | *5260.00        | 93.9 AV                 |                |             | 1.20 H             | 207                  | 92.7             | 1.2                      |
| 3                                                    | 5350.00         | 52.2 PK                 | 74.0           | -21.8       | 1.20 H             | 207                  | 50.8             | 1.4                      |
| 4                                                    | 5350.00         | 39.8 AV                 | 54.0           | -14.2       | 1.20 H             | 207                  | 38.4             | 1.4                      |
| 5                                                    | #10510.00       | 47.1 PK                 | 68.2           | -21.1       | 2.19 H             | 70                   | 35.7             | 11.4                     |
| 6                                                    | 15765.00        | 46.3 PK                 | 74.0           | -27.7       | 1.34 H             | 87                   | 35.5             | 10.8                     |
| 7                                                    | 15765.00        | 32.4 AV                 | 54.0           | -21.6       | 1.34 H             | 87                   | 21.6             | 10.8                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5260.00        | 109.4 PK                |                |             | 1.19 V             | 341                  | 108.2            | 1.2                      |
| 2                                                  | *5260.00        | 98.3 AV                 |                |             | 1.19 V             | 341                  | 97.1             | 1.2                      |
| 3                                                  | 5350.00         | 51.8 PK                 | 74.0           | -22.2       | 1.19 V             | 341                  | 50.4             | 1.4                      |
| 4                                                  | 5350.00         | 40.7 AV                 | 54.0           | -13.3       | 1.19 V             | 341                  | 39.3             | 1.4                      |
| 5                                                  | #10510.00       | 47.5 PK                 | 68.2           | -20.7       | 1.23 V             | 83                   | 36.1             | 11.4                     |
| 6                                                  | 15765.00        | 46.1 PK                 | 74.0           | -27.9       | 1.84 V             | 132                  | 35.3             | 10.8                     |
| 7                                                  | 15765.00        | 33.0 AV                 | 54.0           | -21.0       | 1.84 V             | 132                  | 22.2             | 10.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 60 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 103.3 PK                |                |             | 1.10 H             | 219                  | 102.1            | 1.2                      |
| 2                                                    | *5300.00        | 94.3 AV                 |                |             | 1.10 H             | 219                  | 93.1             | 1.2                      |
| 3                                                    | 5350.00         | 51.2 PK                 | 74.0           | -22.8       | 1.10 H             | 219                  | 49.8             | 1.4                      |
| 4                                                    | 5350.00         | 39.3 AV                 | 54.0           | -14.7       | 1.10 H             | 219                  | 37.9             | 1.4                      |
| 5                                                    | 10610.50        | 46.9 PK                 | 74.0           | -27.1       | 2.15 H             | 86                   | 35.1             | 11.8                     |
| 6                                                    | 10610.50        | 35.8 AV                 | 54.0           | -18.2       | 2.15 H             | 86                   | 24.0             | 11.8                     |
| 7                                                    | 15915.80        | 46.0 PK                 | 74.0           | -28.0       | 1.34 H             | 75                   | 35.3             | 10.7                     |
| 8                                                    | 15915.80        | 32.6 AV                 | 54.0           | -21.4       | 1.34 H             | 75                   | 21.9             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 109.8 PK                |                |             | 1.11 V             | 360                  | 108.6            | 1.2                      |
| 2                                                    | *5300.00        | 98.9 AV                 |                |             | 1.11 V             | 360                  | 97.7             | 1.2                      |
| 3                                                    | 5350.00         | 51.1 PK                 | 74.0           | -22.9       | 1.11 V             | 360                  | 49.7             | 1.4                      |
| 4                                                    | 5350.00         | 40.1 AV                 | 54.0           | -13.9       | 1.11 V             | 360                  | 38.7             | 1.4                      |
| 5                                                    | 10610.50        | 47.5 PK                 | 74.0           | -26.5       | 1.21 V             | 81                   | 35.7             | 11.8                     |
| 6                                                    | 10610.50        | 36.6 AV                 | 54.0           | -17.4       | 1.21 V             | 81                   | 24.8             | 11.8                     |
| 7                                                    | 15915.80        | 46.7 PK                 | 74.0           | -27.3       | 1.88 V             | 123                  | 36.0             | 10.7                     |
| 8                                                    | 15915.80        | 33.2 AV                 | 54.0           | -20.8       | 1.88 V             | 123                  | 22.5             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 64 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 103.2 PK                |                |             | 1.15 H             | 205                  | 101.8            | 1.4                      |
| 2                                                    | *5320.00        | 94.2 AV                 |                |             | 1.15 H             | 205                  | 92.8             | 1.4                      |
| 3                                                    | 5350.00         | 50.8 PK                 | 74.0           | -23.2       | 1.15 H             | 205                  | 49.4             | 1.4                      |
| 4                                                    | 5350.00         | 39.1 AV                 | 54.0           | -14.9       | 1.15 H             | 205                  | 37.7             | 1.4                      |
| 5                                                    | 10650.00        | 47.4 PK                 | 74.0           | -26.6       | 2.09 H             | 66                   | 35.5             | 11.9                     |
| 6                                                    | 10650.00        | 36.2 AV                 | 54.0           | -17.8       | 2.09 H             | 66                   | 24.3             | 11.9                     |
| 7                                                    | 15975.00        | 46.1 PK                 | 74.0           | -27.9       | 1.40 H             | 65                   | 35.2             | 10.9                     |
| 8                                                    | 15975.00        | 32.5 AV                 | 54.0           | -21.5       | 1.40 H             | 65                   | 21.6             | 10.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 109.7 PK                |                |             | 1.13 V             | 348                  | 108.3            | 1.4                      |
| 2                                                    | *5320.00        | 98.9 AV                 |                |             | 1.13 V             | 348                  | 97.5             | 1.4                      |
| 3                                                    | 5350.00         | 50.8 PK                 | 74.0           | -23.2       | 1.13 V             | 348                  | 49.4             | 1.4                      |
| 4                                                    | 5350.00         | 39.5 AV                 | 54.0           | -14.5       | 1.13 V             | 348                  | 38.1             | 1.4                      |
| 5                                                    | 10650.00        | 47.6 PK                 | 74.0           | -26.4       | 1.21 V             | 79                   | 35.7             | 11.9                     |
| 6                                                    | 10650.00        | 37.0 AV                 | 54.0           | -17.0       | 1.21 V             | 79                   | 25.1             | 11.9                     |
| 7                                                    | 15975.00        | 46.5 PK                 | 74.0           | -27.5       | 1.95 V             | 117                  | 35.6             | 10.9                     |
| 8                                                    | 15975.00        | 33.3 AV                 | 54.0           | -20.7       | 1.95 V             | 117                  | 22.4             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5455.00         | 51.0 PK                 | 74.0           | -23.0       | 1.05 H             | 225                  | 49.4             | 1.6                      |
| 2                                                    | 5455.00         | 39.5 AV                 | 54.0           | -14.5       | 1.05 H             | 225                  | 37.9             | 1.6                      |
| 3                                                    | #5470.00        | 50.9 PK                 | 68.2           | -17.3       | 1.05 H             | 225                  | 49.3             | 1.6                      |
| 4                                                    | *5500.00        | 104.1 PK                |                |             | 1.05 H             | 225                  | 102.4            | 1.7                      |
| 5                                                    | *5500.00        | 93.4 AV                 |                |             | 1.05 H             | 225                  | 91.7             | 1.7                      |
| 6                                                    | 10989.00        | 47.4 PK                 | 74.0           | -26.6       | 2.13 H             | 93                   | 35.2             | 12.2                     |
| 7                                                    | 10989.00        | 36.3 AV                 | 54.0           | -17.7       | 2.13 H             | 93                   | 24.1             | 12.2                     |
| 8                                                    | #16483.50       | 47.0 PK                 | 68.2           | -21.2       | 1.35 H             | 89                   | 33.7             | 13.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5444.50         | 51.8 PK                 | 74.0           | -22.2       | 1.12 V             | 341                  | 50.2             | 1.6                      |
| 2                                                    | 5444.50         | 39.7 AV                 | 54.0           | -14.3       | 1.12 V             | 341                  | 38.1             | 1.6                      |
| 3                                                    | #5467.80        | 50.8 PK                 | 68.2           | -17.4       | 1.12 V             | 341                  | 49.2             | 1.6                      |
| 4                                                    | *5500.00        | 109.9 PK                |                |             | 1.12 V             | 341                  | 108.2            | 1.7                      |
| 5                                                    | *5500.00        | 98.7 AV                 |                |             | 1.12 V             | 341                  | 97.0             | 1.7                      |
| 6                                                    | 10989.00        | 47.6 PK                 | 74.0           | -26.4       | 1.25 V             | 83                   | 35.4             | 12.2                     |
| 7                                                    | 10989.00        | 37.1 AV                 | 54.0           | -16.9       | 1.25 V             | 83                   | 24.9             | 12.2                     |
| 8                                                    | #16483.50       | 46.6 PK                 | 68.2           | -21.6       | 1.90 V             | 136                  | 33.3             | 13.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 103.7 PK                |                |             | 1.08 H             | 214                  | 102.0            | 1.7                      |
| 2                                                    | *5580.00        | 93.2 AV                 |                |             | 1.08 H             | 214                  | 91.5             | 1.7                      |
| 3                                                    | 11150.00        | 47.1 PK                 | 74.0           | -26.9       | 2.15 H             | 76                   | 35.5             | 11.6                     |
| 4                                                    | 11150.00        | 36.2 AV                 | 54.0           | -17.8       | 2.15 H             | 76                   | 24.6             | 11.6                     |
| 5                                                    | #16725.00       | 46.6 PK                 | 68.2           | -21.6       | 1.33 H             | 67                   | 31.9             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 108.9 PK                |                |             | 1.19 V             | 358                  | 107.2            | 1.7                      |
| 2                                                    | *5580.00        | 98.1 AV                 |                |             | 1.19 V             | 358                  | 96.4             | 1.7                      |
| 3                                                    | 11150.00        | 47.6 PK                 | 74.0           | -26.4       | 1.21 V             | 76                   | 36.0             | 11.6                     |
| 4                                                    | 11150.00        | 36.9 AV                 | 54.0           | -17.1       | 1.21 V             | 76                   | 25.3             | 11.6                     |
| 5                                                    | #16725.00       | 46.0 PK                 | 68.2           | -22.2       | 1.90 V             | 118                  | 31.3             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 104.2 PK                |                |             | 1.04 H             | 222                  | 102.4            | 1.8                      |
| 2                                                    | *5700.00        | 93.8 AV                 |                |             | 1.04 H             | 222                  | 92.0             | 1.8                      |
| 3                                                    | #5725.00        | 52.7 PK                 | 68.2           | -15.5       | 1.04 H             | 222                  | 50.8             | 1.9                      |
| 4                                                    | 11410.00        | 46.7 PK                 | 74.0           | -27.3       | 2.20 H             | 80                   | 33.9             | 12.8                     |
| 5                                                    | 11410.00        | 36.1 AV                 | 54.0           | -17.9       | 2.20 H             | 80                   | 23.3             | 12.8                     |
| 6                                                    | #17115.00       | 46.8 PK                 | 68.2           | -21.4       | 1.39 H             | 64                   | 30.6             | 16.2                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5700.00        | 108.7 PK                |                |             | 1.15 V             | 345                  | 106.9            | 1.8                      |
| 2                                                  | *5700.00        | 98.0 AV                 |                |             | 1.15 V             | 345                  | 96.2             | 1.8                      |
| 3                                                  | #5725.00        | 53.2 PK                 | 68.2           | -15.0       | 1.15 V             | 345                  | 51.3             | 1.9                      |
| 4                                                  | 11410.00        | 47.3 PK                 | 74.0           | -26.7       | 1.27 V             | 66                   | 34.5             | 12.8                     |
| 5                                                  | 11410.00        | 36.7 AV                 | 54.0           | -17.3       | 1.27 V             | 66                   | 23.9             | 12.8                     |
| 6                                                  | #17115.00       | 47.0 PK                 | 68.2           | -21.2       | 1.90 V             | 132                  | 30.8             | 16.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.6 PK                 | 74.0           | -22.4       | 1.05 H             | 218                  | 50.0             | 1.6                      |
| 2                                                    | 5460.00         | 39.4 AV                 | 54.0           | -14.6       | 1.05 H             | 218                  | 37.8             | 1.6                      |
| 3                                                    | #5470.00        | 52.6 PK                 | 68.2           | -15.6       | 1.05 H             | 218                  | 51.0             | 1.6                      |
| 4                                                    | *5720.00        | 103.8 PK                |                |             | 1.05 H             | 218                  | 101.9            | 1.9                      |
| 5                                                    | *5720.00        | 93.0 AV                 |                |             | 1.05 H             | 218                  | 91.1             | 1.9                      |
| 6                                                    | #5850.00        | 51.6 PK                 | 68.2           | -16.6       | 1.05 H             | 218                  | 49.3             | 2.3                      |
| 7                                                    | 11450.00        | 47.2 PK                 | 74.0           | -26.8       | 2.14 H             | 76                   | 34.6             | 12.6                     |
| 8                                                    | 11450.00        | 36.2 AV                 | 54.0           | -17.8       | 2.14 H             | 76                   | 23.6             | 12.6                     |
| 9                                                    | #17175.00       | 46.3 PK                 | 68.2           | -21.9       | 1.34 H             | 74                   | 30.5             | 15.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.9 PK                 | 74.0           | -22.1       | 1.17 V             | 339                  | 50.3             | 1.6                      |
| 2                                                    | 5460.00         | 39.6 AV                 | 54.0           | -14.4       | 1.17 V             | 339                  | 38.0             | 1.6                      |
| 3                                                    | #5470.00        | 52.5 PK                 | 68.2           | -15.7       | 1.17 V             | 339                  | 50.9             | 1.6                      |
| 4                                                    | *5720.00        | 109.4 PK                |                |             | 1.17 V             | 339                  | 107.5            | 1.9                      |
| 5                                                    | *5720.00        | 98.5 AV                 |                |             | 1.17 V             | 339                  | 96.6             | 1.9                      |
| 6                                                    | #5850.00        | 51.4 PK                 | 68.2           | -16.8       | 1.17 V             | 339                  | 49.1             | 2.3                      |
| 7                                                    | 11450.00        | 47.0 PK                 | 74.0           | -27.0       | 1.21 V             | 59                   | 34.4             | 12.6                     |
| 8                                                    | 11450.00        | 36.4 AV                 | 54.0           | -17.6       | 1.21 V             | 59                   | 23.8             | 12.6                     |
| 9                                                    | #17175.00       | 46.5 PK                 | 68.2           | -21.7       | 1.91 V             | 133                  | 30.7             | 15.8                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5565.09        | 50.6 PK                 | 68.2           | -17.6       | 1.05 H             | 212                  | 48.9             | 1.7                      |
| 2                                                    | *5745.00        | 113.5 PK                |                |             | 1.05 H             | 212                  | 111.6            | 1.9                      |
| 3                                                    | *5745.00        | 104.3 AV                |                |             | 1.05 H             | 212                  | 102.4            | 1.9                      |
| 4                                                    | #5988.71        | 52.9 PK                 | 68.2           | -15.3       | 1.05 H             | 212                  | 50.4             | 2.5                      |
| 5                                                    | 11479.00        | 51.5 PK                 | 74.0           | -22.5       | 2.19 H             | 86                   | 39.0             | 12.5                     |
| 6                                                    | 11479.00        | 41.4 AV                 | 54.0           | -12.6       | 2.19 H             | 86                   | 28.9             | 12.5                     |
| 7                                                    | #17218.50       | 52.4 PK                 | 68.2           | -15.8       | 1.33 H             | 60                   | 36.6             | 15.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5555.63        | 51.0 PK                 | 68.2           | -17.2       | 1.12 V             | 347                  | 49.3             | 1.7                      |
| 2                                                    | *5745.00        | 117.6 PK                |                |             | 1.12 V             | 347                  | 115.7            | 1.9                      |
| 3                                                    | *5745.00        | 108.6 AV                |                |             | 1.12 V             | 347                  | 106.7            | 1.9                      |
| 4                                                    | #5935.82        | 52.4 PK                 | 68.2           | -15.8       | 1.12 V             | 347                  | 50.0             | 2.4                      |
| 5                                                    | 11479.00        | 50.5 PK                 | 74.0           | -23.5       | 1.21 V             | 84                   | 38.0             | 12.5                     |
| 6                                                    | 11479.00        | 40.2 AV                 | 54.0           | -13.8       | 1.21 V             | 84                   | 27.7             | 12.5                     |
| 7                                                    | #17218.50       | 57.8 PK                 | 68.2           | -10.4       | 1.98 V             | 124                  | 42.0             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5557.80        | 51.8 PK                 | 68.2           | -16.4       | 1.11 H             | 216                  | 50.1             | 1.7                      |
| 2                                                    | *5785.00        | 113.7 PK                |                |             | 1.11 H             | 216                  | 111.7            | 2.0                      |
| 3                                                    | *5785.00        | 104.6 AV                |                |             | 1.11 H             | 216                  | 102.6            | 2.0                      |
| 4                                                    | #6007.83        | 52.5 PK                 | 68.2           | -15.7       | 1.11 H             | 216                  | 49.9             | 2.6                      |
| 5                                                    | 11580.50        | 52.0 PK                 | 74.0           | -22.0       | 2.12 H             | 77                   | 39.2             | 12.8                     |
| 6                                                    | 11580.50        | 41.5 AV                 | 54.0           | -12.5       | 2.12 H             | 77                   | 28.7             | 12.8                     |
| 7                                                    | #17370.80       | 53.2 PK                 | 68.2           | -15.0       | 1.26 H             | 74                   | 36.2             | 17.0                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5567.84        | 50.6 PK                 | 68.2           | -17.6       | 1.11 V             | 360                  | 48.9             | 1.7                      |
| 2                                                  | *5785.00        | 117.0 PK                |                |             | 1.11 V             | 360                  | 115.0            | 2.0                      |
| 3                                                  | *5785.00        | 108.3 AV                |                |             | 1.11 V             | 360                  | 106.3            | 2.0                      |
| 4                                                  | #5943.38        | 52.2 PK                 | 68.2           | -16.0       | 1.11 V             | 360                  | 49.7             | 2.5                      |
| 5                                                  | 11580.50        | 50.4 PK                 | 74.0           | -23.6       | 1.22 V             | 93                   | 37.6             | 12.8                     |
| 6                                                  | 11580.50        | 40.6 AV                 | 54.0           | -13.4       | 1.22 V             | 93                   | 27.8             | 12.8                     |
| 7                                                  | #17370.80       | 58.2 PK                 | 68.2           | -10.0       | 1.90 V             | 102                  | 41.2             | 17.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5576.10        | 51.4 PK                 | 68.2           | -16.8       | 1.04 H             | 230                  | 49.7             | 1.7                      |
| 2                                                    | *5825.00        | 113.5 PK                |                |             | 1.04 H             | 230                  | 111.3            | 2.2                      |
| 3                                                    | *5825.00        | 104.7 AV                |                |             | 1.04 H             | 230                  | 102.5            | 2.2                      |
| 4                                                    | #6008.86        | 51.7 PK                 | 68.2           | -16.5       | 1.04 H             | 230                  | 49.1             | 2.6                      |
| 5                                                    | 11660.50        | 50.9 PK                 | 74.0           | -23.1       | 2.17 H             | 82                   | 38.0             | 12.9                     |
| 6                                                    | 11660.50        | 40.9 AV                 | 54.0           | -13.1       | 2.17 H             | 82                   | 28.0             | 12.9                     |
| 7                                                    | #17490.80       | 52.9 PK                 | 68.2           | -15.3       | 1.29 H             | 74                   | 33.9             | 19.0                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | #5587.29        | 51.0 PK                 | 68.2           | -17.2       | 1.09 V             | 357                  | 49.3             | 1.7                      |
| 2                                                  | *5825.00        | 117.2 PK                |                |             | 1.09 V             | 357                  | 115.0            | 2.2                      |
| 3                                                  | *5825.00        | 108.5 AV                |                |             | 1.09 V             | 357                  | 106.3            | 2.2                      |
| 4                                                  | #5925.00        | 53.8 PK                 | 68.2           | -14.4       | 1.09 V             | 357                  | 51.4             | 2.4                      |
| 5                                                  | 11660.50        | 50.0 PK                 | 74.0           | -24.0       | 1.22 V             | 92                   | 37.1             | 12.9                     |
| 6                                                  | 11660.50        | 39.8 AV                 | 54.0           | -14.2       | 1.22 V             | 92                   | 26.9             | 12.9                     |
| 7                                                  | #17490.80       | 58.1 PK                 | 68.2           | -10.1       | 1.92 V             | 106                  | 39.1             | 19.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

# Below 1GHz Data:


## 802.11ax (HE20)

|                 |                |                   |                 |
|-----------------|----------------|-------------------|-----------------|
| Channel         | TX Channel 149 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 9kHz ~ 1GHz    |                   |                 |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 96.30           | 38.2 QP                 | 43.5           | -5.3        | 3.05 H             | 343                  | 55.8             | -17.6                    |
| 2                                                    | 156.40          | 37.5 QP                 | 43.5           | -6.0        | 1.94 H             | 229                  | 50.0             | -12.5                    |
| 3                                                    | 204.30          | 36.9 QP                 | 43.5           | -6.6        | 1.08 H             | 220                  | 53.0             | -16.1                    |
| 4                                                    | 290.20          | 40.8 QP                 | 46.0           | -5.2        | 1.06 H             | 353                  | 53.0             | -12.2                    |
| 5                                                    | 393.10          | 38.4 QP                 | 46.0           | -7.6        | 1.04 H             | 121                  | 48.1             | -9.7                     |
| 6                                                    | 682.10          | 38.8 QP                 | 46.0           | -7.2        | 1.23 H             | 247                  | 42.6             | -3.8                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

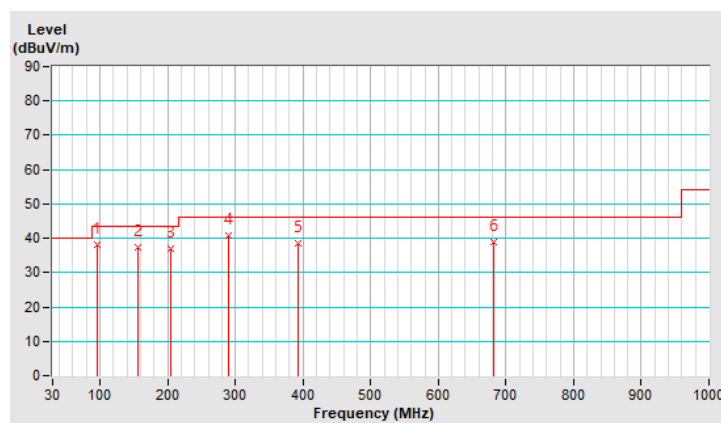


|                 |                |                   |                 |
|-----------------|----------------|-------------------|-----------------|
| Channel         | TX Channel 149 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 9kHz ~ 1GHz    |                   |                 |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 102.70          | 32.9 QP                 | 43.5           | -10.6       | 3.95 V             | 95                   | 49.5             | -16.6                    |
| 2                                                  | 163.10          | 29.4 QP                 | 43.5           | -14.1       | 1.98 V             | 116                  | 41.9             | -12.5                    |
| 3                                                  | 295.10          | 36.6 QP                 | 46.0           | -9.4        | 2.04 V             | 264                  | 48.7             | -12.1                    |
| 4                                                  | 432.60          | 32.5 QP                 | 46.0           | -13.5       | 1.10 V             | 312                  | 41.0             | -8.5                     |
| 5                                                  | 669.00          | 34.0 QP                 | 46.0           | -12.0       | 1.19 V             | 330                  | 38.1             | -4.1                     |
| 6                                                  | 706.00          | 33.5 QP                 | 46.0           | -12.5       | 1.96 V             | 256                  | 37.0             | -3.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

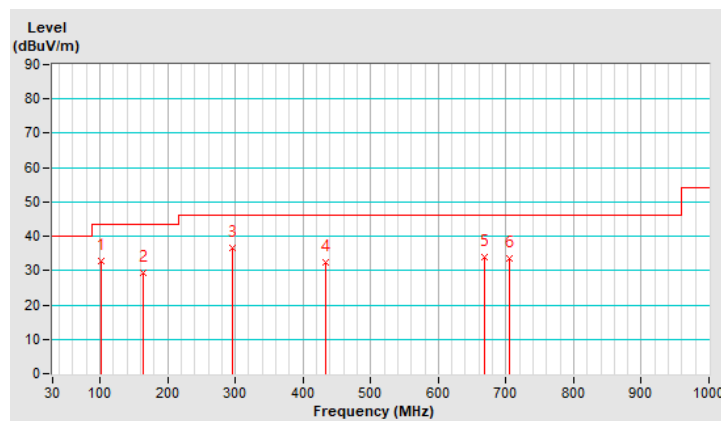

## PIFA Antenna

### Above 1GHz Data:

#### 802.11a

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 65.7 PK                 | 74.0           | -8.3        | 1.55 H             | 180                  | 64.0             | 1.7                      |
| 2                                                    | 5150.00         | 51.9 AV                 | 54.0           | -2.1        | 1.55 H             | 180                  | 50.2             | 1.7                      |
| 3                                                    | *5180.00        | 113.1 PK                |                |             | 1.55 H             | 180                  | 111.6            | 1.5                      |
| 4                                                    | *5180.00        | 103.4 AV                |                |             | 1.55 H             | 180                  | 101.9            | 1.5                      |
| 5                                                    | #10360.00       | 49.7 PK                 | 68.2           | -18.5       | 3.23 H             | 12                   | 38.5             | 11.2                     |
| 6                                                    | 15540.00        | 56.0 PK                 | 74.0           | -18.0       | 1.20 H             | 15                   | 44.3             | 11.7                     |
| 7                                                    | 15540.00        | 44.5 AV                 | 54.0           | -9.5        | 1.20 H             | 15                   | 32.8             | 11.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 63.6 PK                 | 74.0           | -10.4       | 1.00 V             | 225                  | 61.9             | 1.7                      |
| 2                                                    | 5150.00         | 48.0 AV                 | 54.0           | -6.0        | 1.00 V             | 225                  | 46.3             | 1.7                      |
| 3                                                    | *5180.00        | 110.2 PK                |                |             | 1.00 V             | 225                  | 108.7            | 1.5                      |
| 4                                                    | *5180.00        | 100.8 AV                |                |             | 1.00 V             | 225                  | 99.3             | 1.5                      |
| 5                                                    | #10360.00       | 49.5 PK                 | 68.2           | -18.7       | 1.45 V             | 195                  | 38.3             | 11.2                     |
| 6                                                    | 15540.00        | 55.8 PK                 | 74.0           | -18.2       | 1.38 V             | 57                   | 44.1             | 11.7                     |
| 7                                                    | 15540.00        | 44.3 AV                 | 54.0           | -9.7        | 1.38 V             | 57                   | 32.6             | 11.7                     |

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 59.0 PK                 | 74.0           | -15.0       | 1.50 H             | 188                  | 57.3             | 1.7                      |
| 2                                                    | 5150.00         | 44.2 AV                 | 54.0           | -9.8        | 1.50 H             | 188                  | 42.5             | 1.7                      |
| 3                                                    | *5200.00        | 115.7 PK                |                |             | 1.50 H             | 188                  | 114.3            | 1.4                      |
| 4                                                    | *5200.00        | 105.9 AV                |                |             | 1.50 H             | 188                  | 104.5            | 1.4                      |
| 5                                                    | 5350.00         | 52.3 PK                 | 74.0           | -21.7       | 1.50 H             | 188                  | 50.9             | 1.4                      |
| 6                                                    | 5350.00         | 40.1 AV                 | 54.0           | -13.9       | 1.50 H             | 188                  | 38.7             | 1.4                      |
| 7                                                    | #10400.00       | 48.2 PK                 | 68.2           | -20.0       | 3.26 H             | 15                   | 36.7             | 11.5                     |
| 8                                                    | 15600.00        | 58.2 PK                 | 74.0           | -15.8       | 1.21 H             | 20                   | 46.7             | 11.5                     |
| 9                                                    | 15600.00        | 47.4 AV                 | 54.0           | -6.6        | 1.21 H             | 20                   | 35.9             | 11.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.8 PK                 | 74.0           | -18.2       | 1.26 V             | 223                  | 54.1             | 1.7                      |
| 2                                                    | 5150.00         | 42.3 AV                 | 54.0           | -11.7       | 1.26 V             | 223                  | 40.6             | 1.7                      |
| 3                                                    | *5200.00        | 110.8 PK                |                |             | 1.26 V             | 223                  | 109.4            | 1.4                      |
| 4                                                    | *5200.00        | 102.2 AV                |                |             | 1.26 V             | 223                  | 100.8            | 1.4                      |
| 5                                                    | 5350.00         | 53.1 PK                 | 74.0           | -20.9       | 1.26 V             | 223                  | 51.7             | 1.4                      |
| 6                                                    | 5350.00         | 41.1 AV                 | 54.0           | -12.9       | 1.26 V             | 223                  | 39.7             | 1.4                      |
| 7                                                    | #10400.00       | 49.0 PK                 | 68.2           | -19.2       | 1.50 V             | 188                  | 37.5             | 11.5                     |
| 8                                                    | 15600.00        | 55.2 PK                 | 74.0           | -18.8       | 1.39 V             | 57                   | 43.7             | 11.5                     |
| 9                                                    | 15600.00        | 43.9 AV                 | 54.0           | -10.1       | 1.39 V             | 57                   | 32.4             | 11.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.6 PK                 | 74.0           | -22.4       | 1.61 H             | 182                  | 49.9             | 1.7                      |
| 2                                                    | 5150.00         | 40.3 AV                 | 54.0           | -13.7       | 1.61 H             | 182                  | 38.6             | 1.7                      |
| 3                                                    | *5240.00        | 114.6 PK                |                |             | 1.61 H             | 182                  | 113.4            | 1.2                      |
| 4                                                    | *5240.00        | 104.9 AV                |                |             | 1.61 H             | 182                  | 103.7            | 1.2                      |
| 5                                                    | 5350.00         | 51.9 PK                 | 74.0           | -22.1       | 1.61 H             | 182                  | 50.5             | 1.4                      |
| 6                                                    | 5350.00         | 40.0 AV                 | 54.0           | -14.0       | 1.61 H             | 182                  | 38.6             | 1.4                      |
| 7                                                    | #10480.00       | 49.2 PK                 | 68.2           | -19.0       | 3.26 H             | 31                   | 37.7             | 11.5                     |
| 8                                                    | 15720.00        | 55.5 PK                 | 74.0           | -18.5       | 1.20 H             | 38                   | 44.4             | 11.1                     |
| 9                                                    | 15720.00        | 44.3 AV                 | 54.0           | -9.7        | 1.20 H             | 38                   | 33.2             | 11.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.3 PK                 | 74.0           | -22.7       | 1.22 V             | 223                  | 49.6             | 1.7                      |
| 2                                                    | 5150.00         | 40.1 AV                 | 54.0           | -13.9       | 1.22 V             | 223                  | 38.4             | 1.7                      |
| 3                                                    | *5240.00        | 111.3 PK                |                |             | 1.22 V             | 223                  | 110.1            | 1.2                      |
| 4                                                    | *5240.00        | 101.7 AV                |                |             | 1.22 V             | 223                  | 100.5            | 1.2                      |
| 5                                                    | 5350.00         | 51.2 PK                 | 74.0           | -22.8       | 1.22 V             | 223                  | 49.8             | 1.4                      |
| 6                                                    | 5350.00         | 39.7 AV                 | 54.0           | -14.3       | 1.22 V             | 223                  | 38.3             | 1.4                      |
| 7                                                    | #10480.00       | 49.1 PK                 | 68.2           | -19.1       | 1.47 V             | 185                  | 37.6             | 11.5                     |
| 8                                                    | 15720.00        | 55.5 PK                 | 74.0           | -18.5       | 1.34 V             | 67                   | 44.4             | 11.1                     |
| 9                                                    | 15720.00        | 44.0 AV                 | 54.0           | -10.0       | 1.34 V             | 67                   | 32.9             | 11.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 115.1 PK                |                |             | 1.66 H             | 167                  | 113.9            | 1.2                      |
| 2                                                    | *5260.00        | 105.3 AV                |                |             | 1.66 H             | 167                  | 104.1            | 1.2                      |
| 3                                                    | 5350.00         | 51.4 PK                 | 74.0           | -22.6       | 1.66 H             | 167                  | 50.0             | 1.4                      |
| 4                                                    | 5350.00         | 39.9 AV                 | 54.0           | -14.1       | 1.66 H             | 167                  | 38.5             | 1.4                      |
| 5                                                    | #10520.00       | 49.4 PK                 | 68.2           | -18.8       | 3.34 H             | 12                   | 38.0             | 11.4                     |
| 6                                                    | 15780.00        | 55.7 PK                 | 74.0           | -18.3       | 1.19 H             | 18                   | 45.0             | 10.7                     |
| 7                                                    | 15780.00        | 44.5 AV                 | 54.0           | -9.5        | 1.19 H             | 18                   | 33.8             | 10.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5260.00        | 111.8 PK                |                |             | 1.27 V             | 214                  | 110.6            | 1.2                      |
| 2                                                  | *5260.00        | 102.0 AV                |                |             | 1.27 V             | 214                  | 100.8            | 1.2                      |
| 3                                                  | 5350.00         | 51.0 PK                 | 74.0           | -23.0       | 1.27 V             | 214                  | 49.6             | 1.4                      |
| 4                                                  | 5350.00         | 40.0 AV                 | 54.0           | -14.0       | 1.27 V             | 214                  | 38.6             | 1.4                      |
| 5                                                  | #10520.00       | 48.7 PK                 | 68.2           | -19.5       | 1.48 V             | 188                  | 37.3             | 11.4                     |
| 6                                                  | 15780.00        | 55.2 PK                 | 74.0           | -18.8       | 1.34 V             | 63                   | 44.5             | 10.7                     |
| 7                                                  | 15780.00        | 44.0 AV                 | 54.0           | -10.0       | 1.34 V             | 63                   | 33.3             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 60 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 114.5 PK                |                |             | 1.61 H             | 174                  | 113.3            | 1.2                      |
| 2                                                    | *5300.00        | 104.9 AV                |                |             | 1.61 H             | 174                  | 103.7            | 1.2                      |
| 3                                                    | 5350.00         | 58.8 PK                 | 74.0           | -15.2       | 1.61 H             | 174                  | 57.4             | 1.4                      |
| 4                                                    | 5350.00         | 42.7 AV                 | 54.0           | -11.3       | 1.61 H             | 174                  | 41.3             | 1.4                      |
| 5                                                    | 10600.00        | 49.3 PK                 | 74.0           | -24.7       | 3.28 H             | 20                   | 37.5             | 11.8                     |
| 6                                                    | 10600.00        | 39.2 AV                 | 54.0           | -14.8       | 3.28 H             | 20                   | 27.4             | 11.8                     |
| 7                                                    | 15900.00        | 55.3 PK                 | 74.0           | -18.7       | 1.22 H             | 23                   | 44.6             | 10.7                     |
| 8                                                    | 15900.00        | 44.1 AV                 | 54.0           | -9.9        | 1.22 H             | 23                   | 33.4             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 111.7 PK                |                |             | 1.23 V             | 203                  | 110.5            | 1.2                      |
| 2                                                    | *5300.00        | 101.8 AV                |                |             | 1.23 V             | 203                  | 100.6            | 1.2                      |
| 3                                                    | 5350.00         | 56.3 PK                 | 74.0           | -17.7       | 1.23 V             | 203                  | 54.9             | 1.4                      |
| 4                                                    | 5350.00         | 42.8 AV                 | 54.0           | -11.2       | 1.23 V             | 203                  | 41.4             | 1.4                      |
| 5                                                    | 10600.00        | 49.1 PK                 | 74.0           | -24.9       | 1.52 V             | 182                  | 37.3             | 11.8                     |
| 6                                                    | 10600.00        | 39.9 AV                 | 54.0           | -14.1       | 1.52 V             | 182                  | 28.1             | 11.8                     |
| 7                                                    | 15900.00        | 55.5 PK                 | 74.0           | -18.5       | 1.35 V             | 54                   | 44.8             | 10.7                     |
| 8                                                    | 15900.00        | 44.3 AV                 | 54.0           | -9.7        | 1.35 V             | 54                   | 33.6             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                        |               |                          |              |
|------------------------|---------------|--------------------------|--------------|
| <b>Channel</b>         | TX Channel 64 | <b>Detector Function</b> | Peak (PK)    |
| <b>Frequency Range</b> | 1GHz ~ 40GHz  |                          | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 114.1 PK                |                |             | 1.51 H             | 186                  | 112.7            | 1.4                      |
| 2                                                    | *5320.00        | 104.3 AV                |                |             | 1.51 H             | 186                  | 102.9            | 1.4                      |
| 3                                                    | 5350.00         | 70.0 PK                 | 74.0           | -4.0        | 1.51 H             | 186                  | 68.6             | 1.4                      |
| 4                                                    | 5350.00         | 52.5 AV                 | 54.0           | -1.5        | 1.51 H             | 186                  | 51.1             | 1.4                      |
| 5                                                    | 10640.00        | 49.4 PK                 | 74.0           | -24.6       | 3.32 H             | 21                   | 37.5             | 11.9                     |
| 6                                                    | 10640.00        | 39.5 AV                 | 54.0           | -14.5       | 3.32 H             | 21                   | 27.6             | 11.9                     |
| 7                                                    | 15960.00        | 54.9 PK                 | 74.0           | -19.1       | 1.27 H             | 8                    | 44.0             | 10.9                     |
| 8                                                    | 15960.00        | 43.7 AV                 | 54.0           | -10.3       | 1.27 H             | 8                    | 32.8             | 10.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 110.7 PK                |                |             | 1.13 V             | 234                  | 109.3            | 1.4                      |
| 2                                                    | *5320.00        | 101.1 AV                |                |             | 1.13 V             | 234                  | 99.7             | 1.4                      |
| 3                                                    | 5350.00         | 64.5 PK                 | 74.0           | -9.5        | 1.13 V             | 234                  | 63.1             | 1.4                      |
| 4                                                    | 5350.00         | 49.5 AV                 | 54.0           | -4.5        | 1.13 V             | 234                  | 48.1             | 1.4                      |
| 5                                                    | 10640.00        | 48.4 PK                 | 74.0           | -25.6       | 1.53 V             | 187                  | 36.5             | 11.9                     |
| 6                                                    | 10640.00        | 39.6 AV                 | 54.0           | -14.4       | 1.53 V             | 187                  | 27.7             | 11.9                     |
| 7                                                    | 15960.00        | 55.1 PK                 | 74.0           | -18.9       | 1.35 V             | 60                   | 44.2             | 10.9                     |
| 8                                                    | 15960.00        | 43.9 AV                 | 54.0           | -10.1       | 1.35 V             | 60                   | 33.0             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 58.4 PK                 | 74.0           | -15.6       | 1.60 H             | 183                  | 56.8             | 1.6                      |
| 2                                                    | 5460.00         | 44.2 AV                 | 54.0           | -9.8        | 1.60 H             | 183                  | 42.6             | 1.6                      |
| 3                                                    | #5468.63        | 66.2 PK                 | 68.2           | -2.0        | 1.60 H             | 183                  | 64.6             | 1.6                      |
| 4                                                    | *5500.00        | 112.6 PK                |                |             | 1.60 H             | 183                  | 110.9            | 1.7                      |
| 5                                                    | *5500.00        | 102.5 AV                |                |             | 1.60 H             | 183                  | 100.8            | 1.7                      |
| 6                                                    | 11000.00        | 49.0 PK                 | 74.0           | -25.0       | 3.24 H             | 12                   | 36.8             | 12.2                     |
| 7                                                    | 11000.00        | 39.1 AV                 | 54.0           | -14.9       | 3.24 H             | 12                   | 26.9             | 12.2                     |
| 8                                                    | #16500.00       | 55.0 PK                 | 68.2           | -13.2       | 1.22 H             | 29                   | 41.6             | 13.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 55.9 PK                 | 74.0           | -18.1       | 1.15 V             | 235                  | 54.3             | 1.6                      |
| 2                                                    | 5460.00         | 41.6 AV                 | 54.0           | -12.4       | 1.15 V             | 235                  | 40.0             | 1.6                      |
| 3                                                    | #5470.00        | 60.7 PK                 | 68.2           | -7.5        | 1.15 V             | 235                  | 59.1             | 1.6                      |
| 4                                                    | *5500.00        | 108.9 PK                |                |             | 1.15 V             | 235                  | 107.2            | 1.7                      |
| 5                                                    | *5500.00        | 98.7 AV                 |                |             | 1.15 V             | 235                  | 97.0             | 1.7                      |
| 6                                                    | 11000.00        | 48.5 PK                 | 74.0           | -25.5       | 1.55 V             | 180                  | 36.3             | 12.2                     |
| 7                                                    | 11000.00        | 39.8 AV                 | 54.0           | -14.2       | 1.55 V             | 180                  | 27.6             | 12.2                     |
| 8                                                    | #16500.00       | 55.2 PK                 | 68.2           | -13.0       | 1.42 V             | 57                   | 41.8             | 13.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 116 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 113.1 PK                |                |             | 1.56 H             | 168                  | 111.4            | 1.7                      |
| 2                                                    | *5580.00        | 103.6 AV                |                |             | 1.56 H             | 168                  | 101.9            | 1.7                      |
| 3                                                    | 11160.00        | 49.6 PK                 | 74.0           | -24.4       | 3.25 H             | 12                   | 38.0             | 11.6                     |
| 4                                                    | 11160.00        | 39.6 AV                 | 54.0           | -14.4       | 3.25 H             | 12                   | 28.0             | 11.6                     |
| 5                                                    | #16740.00       | 55.0 PK                 | 68.2           | -13.2       | 1.23 H             | 36                   | 40.3             | 14.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 109.8 PK                |                |             | 1.00 V             | 235                  | 108.1            | 1.7                      |
| 2                                                    | *5580.00        | 100.4 AV                |                |             | 1.00 V             | 235                  | 98.7             | 1.7                      |
| 3                                                    | 11160.00        | 49.3 PK                 | 74.0           | -24.7       | 1.48 V             | 199                  | 37.7             | 11.6                     |
| 4                                                    | 11160.00        | 40.4 AV                 | 54.0           | -13.6       | 1.48 V             | 199                  | 28.8             | 11.6                     |
| 5                                                    | #16740.00       | 55.3 PK                 | 68.2           | -12.9       | 1.44 V             | 72                   | 40.6             | 14.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 140 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 110.9 PK                |                |             | 1.61 H             | 162                  | 109.1            | 1.8                      |
| 2                                                    | *5700.00        | 100.7 AV                |                |             | 1.61 H             | 162                  | 98.9             | 1.8                      |
| 3                                                    | #5725.00        | 66.3 PK                 | 68.2           | -1.9        | 1.61 H             | 162                  | 64.4             | 1.9                      |
| 4                                                    | 11400.00        | 49.7 PK                 | 74.0           | -24.3       | 3.25 H             | 14                   | 36.9             | 12.8                     |
| 5                                                    | 11400.00        | 39.6 AV                 | 54.0           | -14.4       | 3.25 H             | 14                   | 26.8             | 12.8                     |
| 6                                                    | #17100.00       | 55.1 PK                 | 68.2           | -13.1       | 1.27 H             | 22                   | 38.8             | 16.3                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5700.00        | 107.6 PK                |                |             | 1.19 V             | 245                  | 105.8            | 1.8                      |
| 2                                                  | *5700.00        | 97.2 AV                 |                |             | 1.19 V             | 245                  | 95.4             | 1.8                      |
| 3                                                  | #5725.00        | 60.2 PK                 | 68.2           | -8.0        | 1.19 V             | 245                  | 58.3             | 1.9                      |
| 4                                                  | 11400.00        | 49.0 PK                 | 74.0           | -25.0       | 1.46 V             | 175                  | 36.2             | 12.8                     |
| 5                                                  | 11400.00        | 40.2 AV                 | 54.0           | -13.8       | 1.46 V             | 175                  | 27.4             | 12.8                     |
| 6                                                  | #17100.00       | 55.0 PK                 | 68.2           | -13.2       | 1.36 V             | 56                   | 38.7             | 16.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 144 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.1 PK                 | 74.0           | -22.9       | 1.60 H             | 159                  | 49.5             | 1.6                      |
| 2                                                    | 5460.00         | 40.8 AV                 | 54.0           | -13.2       | 1.60 H             | 159                  | 39.2             | 1.6                      |
| 3                                                    | #5470.00        | 52.3 PK                 | 68.2           | -15.9       | 1.60 H             | 159                  | 50.7             | 1.6                      |
| 4                                                    | *5720.00        | 113.0 PK                |                |             | 1.60 H             | 159                  | 111.1            | 1.9                      |
| 5                                                    | *5720.00        | 103.4 AV                |                |             | 1.60 H             | 159                  | 101.5            | 1.9                      |
| 6                                                    | #5850.00        | 53.1 PK                 | 68.2           | -15.1       | 1.60 H             | 159                  | 50.8             | 2.3                      |
| 7                                                    | 11440.00        | 49.6 PK                 | 74.0           | -24.4       | 3.25 H             | 10                   | 37.0             | 12.6                     |
| 8                                                    | 11440.00        | 39.5 AV                 | 54.0           | -14.5       | 3.25 H             | 10                   | 26.9             | 12.6                     |
| 9                                                    | #17160.00       | 55.2 PK                 | 68.2           | -13.0       | 1.18 H             | 36                   | 39.3             | 15.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 51.4 PK                 | 74.0           | -22.6       | 1.01 V             | 246                  | 49.8             | 1.6                      |
| 2                                                    | 5460.00         | 39.2 AV                 | 54.0           | -14.8       | 1.01 V             | 246                  | 37.6             | 1.6                      |
| 3                                                    | #5470.00        | 51.9 PK                 | 68.2           | -16.3       | 1.01 V             | 246                  | 50.3             | 1.6                      |
| 4                                                    | *5720.00        | 110.1 PK                |                |             | 1.01 V             | 246                  | 108.2            | 1.9                      |
| 5                                                    | *5720.00        | 100.8 AV                |                |             | 1.01 V             | 246                  | 98.9             | 1.9                      |
| 6                                                    | #5850.00        | 53.1 PK                 | 68.2           | -15.1       | 1.01 V             | 246                  | 50.8             | 2.3                      |
| 7                                                    | 11440.00        | 48.5 PK                 | 74.0           | -25.5       | 1.45 V             | 185                  | 35.9             | 12.6                     |
| 8                                                    | 11440.00        | 39.6 AV                 | 54.0           | -14.4       | 1.45 V             | 185                  | 27.0             | 12.6                     |
| 9                                                    | #17160.00       | 54.9 PK                 | 68.2           | -13.3       | 1.42 V             | 50                   | 39.0             | 15.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 149 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5745.00        | 114.8 PK                |                |             | 2.42 H             | 179                  | 112.9            | 1.9                      |
| 2                                                    | *5745.00        | 104.5 AV                |                |             | 2.42 H             | 179                  | 102.6            | 1.9                      |
| 3                                                    | 11490.00        | 49.2 PK                 | 74.0           | -24.8       | 3.30 H             | 9                    | 36.7             | 12.5                     |
| 4                                                    | 11490.00        | 38.9 AV                 | 54.0           | -15.1       | 3.30 H             | 9                    | 26.4             | 12.5                     |
| 5                                                    | #17235.00       | 55.6 PK                 | 68.2           | -12.6       | 1.26 H             | 12                   | 39.8             | 15.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5745.00        | 112.7 PK                |                |             | 1.18 V             | 307                  | 110.8            | 1.9                      |
| 2                                                    | *5745.00        | 102.7 AV                |                |             | 1.18 V             | 307                  | 100.8            | 1.9                      |
| 3                                                    | 11490.00        | 49.3 PK                 | 74.0           | -24.7       | 1.47 V             | 196                  | 36.8             | 12.5                     |
| 4                                                    | 11490.00        | 40.5 AV                 | 54.0           | -13.5       | 1.47 V             | 196                  | 28.0             | 12.5                     |
| 5                                                    | #17235.00       | 54.7 PK                 | 68.2           | -13.5       | 1.42 V             | 66                   | 38.9             | 15.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 157 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5785.00        | 114.5 PK                |                |             | 2.41 H             | 179                  | 112.5            | 2.0                      |
| 2                                                    | *5785.00        | 104.4 AV                |                |             | 2.41 H             | 179                  | 102.4            | 2.0                      |
| 3                                                    | 11570.00        | 49.3 PK                 | 74.0           | -24.7       | 3.26 H             | 16                   | 36.4             | 12.9                     |
| 4                                                    | 11570.00        | 39.5 AV                 | 54.0           | -14.5       | 3.26 H             | 16                   | 26.6             | 12.9                     |
| 5                                                    | #17355.00       | 55.5 PK                 | 68.2           | -12.7       | 1.27 H             | 36                   | 38.7             | 16.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5785.00        | 113.0 PK                |                |             | 1.19 V             | 308                  | 111.0            | 2.0                      |
| 2                                                    | *5785.00        | 103.1 AV                |                |             | 1.19 V             | 308                  | 101.1            | 2.0                      |
| 3                                                    | 11570.00        | 49.0 PK                 | 74.0           | -25.0       | 1.44 V             | 178                  | 36.1             | 12.9                     |
| 4                                                    | 11570.00        | 40.0 AV                 | 54.0           | -14.0       | 1.44 V             | 178                  | 27.1             | 12.9                     |
| 5                                                    | #17355.00       | 55.5 PK                 | 68.2           | -12.7       | 1.41 V             | 48                   | 38.7             | 16.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.



|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 165 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5825.00        | 115.4 PK                |                |             | 2.40 H             | 180                  | 113.2            | 2.2                      |
| 2                                                    | *5825.00        | 105.2 AV                |                |             | 2.40 H             | 180                  | 103.0            | 2.2                      |
| 3                                                    | 11650.00        | 48.9 PK                 | 74.0           | -25.1       | 3.32 H             | 9                    | 36.0             | 12.9                     |
| 4                                                    | 11650.00        | 38.9 AV                 | 54.0           | -15.1       | 3.32 H             | 9                    | 26.0             | 12.9                     |
| 5                                                    | #17475.00       | 55.3 PK                 | 68.2           | -12.9       | 1.19 H             | 10                   | 36.6             | 18.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5825.00        | 112.8 PK                |                |             | 1.17 V             | 306                  | 110.6            | 2.2                      |
| 2                                                    | *5825.00        | 102.9 AV                |                |             | 1.17 V             | 306                  | 100.7            | 2.2                      |
| 3                                                    | 11650.00        | 49.1 PK                 | 74.0           | -24.9       | 1.56 V             | 201                  | 36.2             | 12.9                     |
| 4                                                    | 11650.00        | 40.0 AV                 | 54.0           | -14.0       | 1.56 V             | 201                  | 27.1             | 12.9                     |
| 5                                                    | #17475.00       | 55.3 PK                 | 68.2           | -12.9       | 1.35 V             | 57                   | 36.6             | 18.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

## 802.11ax (HE20)

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 36 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 68.7 PK                 | 74.0           | -5.3        | 1.50 H             | 179                  | 67.0             | 1.7                      |
| 2                                                    | 5150.00         | 52.1 AV                 | 54.0           | -1.9        | 1.50 H             | 179                  | 50.4             | 1.7                      |
| 3                                                    | *5180.00        | 113.5 PK                |                |             | 1.50 H             | 179                  | 112.0            | 1.5                      |
| 4                                                    | *5180.00        | 102.4 AV                |                |             | 1.50 H             | 179                  | 100.9            | 1.5                      |
| 5                                                    | #10360.00       | 45.4 PK                 | 68.2           | -22.8       | 3.27 H             | 14                   | 34.2             | 11.2                     |
| 6                                                    | 15540.00        | 53.1 PK                 | 74.0           | -20.9       | 1.11 H             | 20                   | 41.4             | 11.7                     |
| 7                                                    | 15540.00        | 42.0 AV                 | 54.0           | -12.0       | 1.11 H             | 20                   | 30.3             | 11.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | 5150.00         | 63.7 PK                 | 74.0           | -10.3       | 1.04 V             | 223                  | 62.0             | 1.7                      |
| 2                                                  | 5150.00         | 50.0 AV                 | 54.0           | -4.0        | 1.04 V             | 223                  | 48.3             | 1.7                      |
| 3                                                  | *5180.00        | 111.7 PK                |                |             | 1.04 V             | 223                  | 110.2            | 1.5                      |
| 4                                                  | *5180.00        | 100.4 AV                |                |             | 1.04 V             | 223                  | 98.9             | 1.5                      |
| 5                                                  | #10360.00       | 46.9 PK                 | 68.2           | -21.3       | 1.48 V             | 188                  | 35.7             | 11.2                     |
| 6                                                  | 15540.00        | 53.1 PK                 | 74.0           | -20.9       | 1.36 V             | 39                   | 41.4             | 11.7                     |
| 7                                                  | 15540.00        | 42.1 AV                 | 54.0           | -11.9       | 1.36 V             | 39                   | 30.4             | 11.7                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 40 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.8 PK                 | 74.0           | -18.2       | 1.52 H             | 183                  | 54.1             | 1.7                      |
| 2                                                    | 5150.00         | 44.2 AV                 | 54.0           | -9.8        | 1.52 H             | 183                  | 42.5             | 1.7                      |
| 3                                                    | *5200.00        | 115.7 PK                |                |             | 1.52 H             | 183                  | 114.3            | 1.4                      |
| 4                                                    | *5200.00        | 104.2 AV                |                |             | 1.52 H             | 183                  | 102.8            | 1.4                      |
| 5                                                    | #10400.00       | 45.8 PK                 | 68.2           | -22.4       | 3.28 H             | 12                   | 34.3             | 11.5                     |
| 6                                                    | 15600.00        | 53.5 PK                 | 74.0           | -20.5       | 1.17 H             | 16                   | 42.0             | 11.5                     |
| 7                                                    | 15600.00        | 42.3 AV                 | 54.0           | -11.7       | 1.17 H             | 16                   | 30.8             | 11.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 56.5 PK                 | 74.0           | -17.5       | 1.09 V             | 214                  | 54.8             | 1.7                      |
| 2                                                    | 5150.00         | 42.8 AV                 | 54.0           | -11.2       | 1.09 V             | 214                  | 41.1             | 1.7                      |
| 3                                                    | *5200.00        | 111.6 PK                |                |             | 1.09 V             | 214                  | 110.2            | 1.4                      |
| 4                                                    | *5200.00        | 101.8 AV                |                |             | 1.09 V             | 214                  | 100.4            | 1.4                      |
| 5                                                    | #10400.00       | 46.7 PK                 | 68.2           | -21.5       | 1.44 V             | 183                  | 35.2             | 11.5                     |
| 6                                                    | 15600.00        | 53.3 PK                 | 74.0           | -20.7       | 1.41 V             | 24                   | 41.8             | 11.5                     |
| 7                                                    | 15600.00        | 42.0 AV                 | 54.0           | -12.0       | 1.41 V             | 24                   | 30.5             | 11.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 48 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 52.2 PK                 | 74.0           | -21.8       | 1.52 H             | 174                  | 50.5             | 1.7                      |
| 2                                                    | 5150.00         | 41.1 AV                 | 54.0           | -12.9       | 1.52 H             | 174                  | 39.4             | 1.7                      |
| 3                                                    | *5240.00        | 114.4 PK                |                |             | 1.52 H             | 174                  | 113.2            | 1.2                      |
| 4                                                    | *5240.00        | 103.7 AV                |                |             | 1.52 H             | 174                  | 102.5            | 1.2                      |
| 5                                                    | 5350.00         | 51.0 PK                 | 74.0           | -23.0       | 1.52 H             | 174                  | 49.6             | 1.4                      |
| 6                                                    | 5350.00         | 40.4 AV                 | 54.0           | -13.6       | 1.52 H             | 174                  | 39.0             | 1.4                      |
| 7                                                    | #10480.00       | 45.6 PK                 | 68.2           | -22.6       | 3.29 H             | 4                    | 34.1             | 11.5                     |
| 8                                                    | 15720.00        | 54.0 PK                 | 74.0           | -20.0       | 1.16 H             | 30                   | 42.9             | 11.1                     |
| 9                                                    | 15720.00        | 42.7 AV                 | 54.0           | -11.3       | 1.16 H             | 30                   | 31.6             | 11.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 51.0 PK                 | 74.0           | -23.0       | 1.06 V             | 225                  | 49.3             | 1.7                      |
| 2                                                    | 5150.00         | 39.8 AV                 | 54.0           | -14.2       | 1.06 V             | 225                  | 38.1             | 1.7                      |
| 3                                                    | *5240.00        | 110.4 PK                |                |             | 1.06 V             | 225                  | 109.2            | 1.2                      |
| 4                                                    | *5240.00        | 100.6 AV                |                |             | 1.06 V             | 225                  | 99.4             | 1.2                      |
| 5                                                    | 5350.00         | 51.9 PK                 | 74.0           | -22.1       | 1.06 V             | 225                  | 50.5             | 1.4                      |
| 6                                                    | 5350.00         | 40.2 AV                 | 54.0           | -13.8       | 1.06 V             | 225                  | 38.8             | 1.4                      |
| 7                                                    | #10480.00       | 46.8 PK                 | 68.2           | -21.4       | 1.50 V             | 186                  | 35.3             | 11.5                     |
| 8                                                    | 15720.00        | 53.0 PK                 | 74.0           | -21.0       | 1.32 V             | 55                   | 41.9             | 11.1                     |
| 9                                                    | 15720.00        | 42.0 AV                 | 54.0           | -12.0       | 1.32 V             | 55                   | 30.9             | 11.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 52 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5260.00        | 114.7 PK                |                |             | 1.48 H             | 194                  | 113.5            | 1.2                      |
| 2                                                    | *5260.00        | 104.6 AV                |                |             | 1.48 H             | 194                  | 103.4            | 1.2                      |
| 3                                                    | 5350.00         | 63.5 PK                 | 74.0           | -10.5       | 1.48 H             | 194                  | 62.1             | 1.4                      |
| 4                                                    | 5350.00         | 42.9 AV                 | 54.0           | -11.1       | 1.48 H             | 194                  | 41.5             | 1.4                      |
| 5                                                    | #10520.00       | 46.0 PK                 | 68.2           | -22.2       | 3.30 H             | 7                    | 34.6             | 11.4                     |
| 6                                                    | 15780.00        | 53.9 PK                 | 74.0           | -20.1       | 1.23 H             | 17                   | 43.2             | 10.7                     |
| 7                                                    | 15780.00        | 42.5 AV                 | 54.0           | -11.5       | 1.23 H             | 17                   | 31.8             | 10.7                     |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                 | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                  | *5260.00        | 110.2 PK                |                |             | 1.07 V             | 209                  | 109.0            | 1.2                      |
| 2                                                  | *5260.00        | 100.2 AV                |                |             | 1.07 V             | 209                  | 99.0             | 1.2                      |
| 3                                                  | 5350.00         | 51.0 PK                 | 74.0           | -23.0       | 1.07 V             | 209                  | 49.6             | 1.4                      |
| 4                                                  | 5350.00         | 39.7 AV                 | 54.0           | -14.3       | 1.07 V             | 209                  | 38.3             | 1.4                      |
| 5                                                  | #10520.00       | 47.0 PK                 | 68.2           | -21.2       | 1.52 V             | 189                  | 35.6             | 11.4                     |
| 6                                                  | 15780.00        | 52.6 PK                 | 74.0           | -21.4       | 1.40 V             | 30                   | 41.9             | 10.7                     |
| 7                                                  | 15780.00        | 41.8 AV                 | 54.0           | -12.2       | 1.40 V             | 30                   | 31.1             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 60 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 114.4 PK                |                |             | 1.49 H             | 178                  | 113.2            | 1.2                      |
| 2                                                    | *5300.00        | 104.2 AV                |                |             | 1.49 H             | 178                  | 103.0            | 1.2                      |
| 3                                                    | 5350.00         | 63.6 PK                 | 74.0           | -10.4       | 1.49 H             | 178                  | 62.2             | 1.4                      |
| 4                                                    | 5350.00         | 43.2 AV                 | 54.0           | -10.8       | 1.49 H             | 178                  | 41.8             | 1.4                      |
| 5                                                    | 10600.00        | 45.3 PK                 | 74.0           | -28.7       | 3.25 H             | 17                   | 33.5             | 11.8                     |
| 6                                                    | 10600.00        | 36.8 AV                 | 54.0           | -17.2       | 3.25 H             | 17                   | 25.0             | 11.8                     |
| 7                                                    | 15900.00        | 53.1 PK                 | 74.0           | -20.9       | 1.20 H             | 1                    | 42.4             | 10.7                     |
| 8                                                    | 15900.00        | 41.8 AV                 | 54.0           | -12.2       | 1.20 H             | 1                    | 31.1             | 10.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 109.9 PK                |                |             | 1.02 V             | 223                  | 108.7            | 1.2                      |
| 2                                                    | *5300.00        | 100.1 AV                |                |             | 1.02 V             | 223                  | 98.9             | 1.2                      |
| 3                                                    | 5350.00         | 56.3 PK                 | 74.0           | -17.7       | 1.02 V             | 223                  | 54.9             | 1.4                      |
| 4                                                    | 5350.00         | 42.6 AV                 | 54.0           | -11.4       | 1.02 V             | 223                  | 41.2             | 1.4                      |
| 5                                                    | 10600.00        | 47.4 PK                 | 74.0           | -26.6       | 1.45 V             | 182                  | 35.6             | 11.8                     |
| 6                                                    | 10600.00        | 39.0 AV                 | 54.0           | -15.0       | 1.45 V             | 182                  | 27.2             | 11.8                     |
| 7                                                    | 15900.00        | 53.1 PK                 | 74.0           | -20.9       | 1.40 V             | 30                   | 42.4             | 10.7                     |
| 8                                                    | 15900.00        | 41.9 AV                 | 54.0           | -12.1       | 1.40 V             | 30                   | 31.2             | 10.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |               |                   |              |
|-----------------|---------------|-------------------|--------------|
| Channel         | TX Channel 64 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz  |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 114.2 PK                |                |             | 2.36 H             | 188                  | 112.8            | 1.4                      |
| 2                                                    | *5320.00        | 103.1 AV                |                |             | 2.36 H             | 188                  | 101.7            | 1.4                      |
| 3                                                    | 5350.00         | 63.3 PK                 | 74.0           | -10.7       | 2.36 H             | 188                  | 61.9             | 1.4                      |
| 4                                                    | 5350.00         | 52.2 AV                 | 54.0           | -1.8        | 2.36 H             | 188                  | 50.8             | 1.4                      |
| 5                                                    | 10640.00        | 46.3 PK                 | 74.0           | -27.7       | 3.30 H             | 4                    | 34.4             | 11.9                     |
| 6                                                    | 10640.00        | 37.5 AV                 | 54.0           | -16.5       | 3.30 H             | 4                    | 25.6             | 11.9                     |
| 7                                                    | 15960.00        | 53.3 PK                 | 74.0           | -20.7       | 1.11 H             | 22                   | 42.4             | 10.9                     |
| 8                                                    | 15960.00        | 42.0 AV                 | 54.0           | -12.0       | 1.11 H             | 22                   | 31.1             | 10.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 112.2 PK                |                |             | 1.27 V             | 224                  | 110.8            | 1.4                      |
| 2                                                    | *5320.00        | 100.2 AV                |                |             | 1.27 V             | 224                  | 98.8             | 1.4                      |
| 3                                                    | 5350.00         | 64.1 PK                 | 74.0           | -9.9        | 1.27 V             | 224                  | 62.7             | 1.4                      |
| 4                                                    | 5350.00         | 49.1 AV                 | 54.0           | -4.9        | 1.27 V             | 224                  | 47.7             | 1.4                      |
| 5                                                    | 10640.00        | 46.7 PK                 | 74.0           | -27.3       | 1.50 V             | 195                  | 34.8             | 11.9                     |
| 6                                                    | 10640.00        | 38.3 AV                 | 54.0           | -15.7       | 1.50 V             | 195                  | 26.4             | 11.9                     |
| 7                                                    | 15960.00        | 53.2 PK                 | 74.0           | -20.8       | 1.34 V             | 26                   | 42.3             | 10.9                     |
| 8                                                    | 15960.00        | 41.9 AV                 | 54.0           | -12.1       | 1.34 V             | 26                   | 31.0             | 10.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

|                 |                |                   |              |
|-----------------|----------------|-------------------|--------------|
| Channel         | TX Channel 100 | Detector Function | Peak (PK)    |
| Frequency Range | 1GHz ~ 40GHz   |                   | Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 59.9 PK                 | 74.0           | -14.1       | 1.50 H             | 186                  | 58.3             | 1.6                      |
| 2                                                    | 5460.00         | 44.3 AV                 | 54.0           | -9.7        | 1.50 H             | 186                  | 42.7             | 1.6                      |
| 3                                                    | #5470.00        | 66.2 PK                 | 68.2           | -2.0        | 1.50 H             | 186                  | 64.6             | 1.6                      |
| 4                                                    | *5500.00        | 112.8 PK                |                |             | 1.50 H             | 186                  | 111.1            | 1.7                      |
| 5                                                    | *5500.00        | 101.4 AV                |                |             | 1.50 H             | 186                  | 99.7             | 1.7                      |
| 6                                                    | 11000.00        | 45.7 PK                 | 74.0           | -28.3       | 3.24 H             | 30                   | 33.5             | 12.2                     |
| 7                                                    | 11000.00        | 37.2 AV                 | 54.0           | -16.8       | 3.24 H             | 30                   | 25.0             | 12.2                     |
| 8                                                    | #16500.00       | 53.0 PK                 | 68.2           | -15.2       | 1.20 H             | 21                   | 39.6             | 13.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5459.00         | 61.9 PK                 | 74.0           | -12.1       | 1.07 V             | 307                  | 60.3             | 1.6                      |
| 2                                                    | 5459.00         | 44.3 AV                 | 54.0           | -9.7        | 1.07 V             | 307                  | 42.7             | 1.6                      |
| 3                                                    | #5470.00        | 65.0 PK                 | 68.2           | -3.2        | 1.07 V             | 307                  | 63.4             | 1.6                      |
| 4                                                    | *5500.00        | 110.7 PK                |                |             | 1.07 V             | 307                  | 109.0            | 1.7                      |
| 5                                                    | *5500.00        | 99.6 AV                 |                |             | 1.07 V             | 307                  | 97.9             | 1.7                      |
| 6                                                    | 11000.00        | 46.0 PK                 | 74.0           | -28.0       | 1.50 V             | 188                  | 33.8             | 12.2                     |
| 7                                                    | 11000.00        | 37.9 AV                 | 54.0           | -16.1       | 1.50 V             | 188                  | 25.7             | 12.2                     |
| 8                                                    | #16500.00       | 52.9 PK                 | 68.2           | -15.3       | 1.39 V             | 29                   | 39.5             | 13.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.