

FCC Radio Test Report

FCC ID: TX2-RTL8852BE

Report No. : BTL-FCCP-4-2108T113A
Equipment : 11ax RTL8852BE Combo module
Model Name : RTL8852BE
Brand Name : REALTEK
Applicant : Realtek Semiconductor Corp.
Address : No. 2, Innovation Road II, Hsinchu Science Part, Hsinchu 300, Taiwan

Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2a, U-NII 2c, U-NII 3)

FCC Rule Part(s) : FCC Part15, Subpart E (15.407)
Measurement : ANSI C63.10-2013
Procedure(s)

Date of Receipt : 2021/11/18
Date of Test : 2021/11/18 ~ 2021/12/15
Issued Date : 2021/12/23

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Eric Lee
 Eric Lee, Engineer

Approved by : Jerry Chuang
 Jerry Chuang, Supervisor



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	TEST FACILITY	6
1.2	MEASUREMENT UNCERTAINTY	6
1.3	TEST ENVIRONMENT CONDITIONS	6
1.4	TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2	GENERAL INFORMATION	11
2.1	DESCRIPTION OF EUT	11
2.2	TEST MODES	16
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
2.4	SUPPORT UNITS	17
3	AC POWER LINE CONDUCTED EMISSIONS TEST	18
3.1	LIMIT	18
3.2	TEST PROCEDURE	18
3.3	DEVIATION FROM TEST STANDARD	18
3.4	TEST SETUP	19
3.5	TEST RESULT	19
4	RADIATED EMISSIONS TEST	20
4.1	LIMIT	20
4.2	TEST PROCEDURE	21
4.3	DEVIATION FROM TEST STANDARD	21
4.4	TEST SETUP	22
4.5	EUT OPERATING CONDITIONS	23
4.6	TEST RESULT – BELOW 30 MHZ	23
4.7	TEST RESULT – 30 MHZ TO 1 GHZ	23
4.8	TEST RESULT – ABOVE 1 GHZ	23
5	OUTPUT POWER TEST	24
5.1	LIMIT	24
5.2	TEST PROCEDURE	24
5.3	DEVIATION FROM TEST STANDARD	24
5.4	TEST SETUP	24
5.5	EUT OPERATING CONDITIONS	24
5.6	TEST RESULT	24
6	LIST OF MEASURING EQUIPMENTS	25
7	EUT TEST PHOTO	26
8	EUT PHOTOS	26
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	27
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	32
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	35
APPENDIX D	OUTPUT POWER	228

REVISION HISTORY

Report No.	Version	Description	Issued Date
BTL-FCCP-4-2108T113A	R00	Original Report.	2021/12/23

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

FCC Part 15, Subpart E (15.407)				
Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.407(a)	Output Power	APPENDIX D	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This test report is issued for the RF module (FCCID: TX2-RTL8852BE) to be incorporated to the host device (Model number: LN0001KA, LN0001KA* (* = 0-9, or blank), Marketing Name: Lenovo K14 Gen 1 Product name: Notebook Computer).
Since the RF module has been certificated, after evaluation, above test items were criticized and reconfirmed in this report.
- (4) After spot check, this revision does not change original radio parameters.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

☒ C05 ☐ CB08 ☐ CB11 ☒ CB15 ☐ CB16
☒ SR05

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB15	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Output Power	0.3669

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	20 °C, 64 %	AC 120V	Paul Shen
Radiated emissions below 1 GHz	Refer to data	AC 120V	Eddie Lee
Radiated emissions above 1 GHz	Refer to data	AC 120V	Eddie Lee
Output Power	23.5 °C, 56 %	AC 120V	Tim Lian

1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

Antenna Mode	SISO Main			
Test Software	REALTEK Mass Production Kit mp_V1.0.29			
UNII-1				
Mode	5180 MHz	5200 MHz	5240 MHz	Data Rate
IEEE 802.11a	21.75	21.75	21.5	6 Mbps
IEEE 802.11n (HT20)	21	21.25	21.25	MCS 0
IEEE 802.11ac (VHT20)	21	21.25	21.25	MCS 0
IEEE 802.11ax (HEW20)	21.50	21.75	21.75	MCS 0
Mode	5190 MHz	5230 MHz		Data Rate
IEEE 802.11n (HT40)	21	21		MCS 0
IEEE 802.11ac (VHT40)	21	21		MCS 0
IEEE 802.11ax (HEW40)	20.50	21.5		MCS 0
Mode	5210 MHz			Data Rate
IEEE 802.11ac (VHT80)	20.25			MCS 0
IEEE 802.11ax (HEW80)	19.75			MCS 0

UNII-2A				
Mode	5260 MHz	5300 MHz	5320 MHz	Data Rate
IEEE 802.11a	21.25	21.25	21	6 Mbps
IEEE 802.11n (HT20)	21	21	20.5	MCS 0
IEEE 802.11ac (VHT20)	21	21	20.5	MCS 0
IEEE 802.11ax (HEW20)	21.5	21.75	21.75	MCS 0
Mode	5270 MHz	5310 MHz		Data Rate
IEEE 802.11n (HT40)	21	21.25		MCS 0
IEEE 802.11ac (VHT40)	21	21.25		MCS 0
IEEE 802.11ax (HEW40)	21.5	20.50		MCS 0
Mode	5290 MHz			Data Rate
IEEE 802.11ac (VHT80)	21.25			MCS 0
IEEE 802.11ax (HEW80)	20.25			MCS 0

UNII-2C					
Mode	5500 MHz	5580 MHz	5700 MHz	5720 MHz	Data Rate
IEEE 802.11a	20.25	20.25	19.50	19.75	6 Mbps
IEEE 802.11n (HT20)	20.5	20.25	19.50	20.5	MCS 0
IEEE 802.11ac (VHT20)	20.5	19.50	20.5	20.5	MCS 0
IEEE 802.11ax (HEW20)	20.00	18.00	20.5	20.5	MCS 0
Mode	5510 MHz	5550 MHz	5670 MHz	5710 MHz	Data Rate
IEEE 802.11n (HT40)	20.00	19.75	20.75	20.75	MCS 0
IEEE 802.11ac (VHT40)	20.00	21	19.75	20.75	MCS 0
IEEE 802.11ax (HEW40)	21	21	18.75	20.25	MCS 0
Mode	5530 MHz	5610 MHz	5690 MHz		Data Rate
IEEE 802.11ac (VHT80)	19.25	22.25	21.75		MCS 0
IEEE 802.11ax (HEW80)	19.25	21	21.75		MCS 0

UNII-3				
Mode	5745 MHz	5785 MHz	5825 MHz	Data Rate
IEEE 802.11a	20.5	20.25	20	6 Mbps
IEEE 802.11n (HT20)	20.25	20.25	20	MCS 0
IEEE 802.11ac (VHT20)	20.5	20.25	20	MCS 0
IEEE 802.11ax (HEW20)	20.75	21	21	MCS 0
Mode	5755 MHz	5795 MHz		Data Rate
IEEE 802.11n (HT40)	21	20.5		MCS 0
IEEE 802.11ac (VHT40)	21	20.5		MCS 0
IEEE 802.11ax (HEW40)	21	20.75		MCS 0
Mode	5775 MHz			Data Rate
IEEE 802.11ac (VHT80)	21.75			MCS 0
IEEE 802.11ax (HEW80)	20.75			MCS 0

Antenna Mode	SISO_Aux			
Test Software	REALTEK Mass Production Kit mp_V1.0.29			
UNII-1				
Mode	5180 MHz	5200 MHz	5240 MHz	Data Rate
IEEE 802.11a	21.75	21.75	21.5	6 Mbps
IEEE 802.11n (HT20)	21	21.25	21.25	MCS 0
IEEE 802.11ac (VHT20)	21	21.25	21.25	MCS 0
IEEE 802.11ax (HEW20)	21.50	21.75	21.75	MCS 0
Mode	5190 MHz	5230 MHz		Data Rate
IEEE 802.11n (HT40)	21	21		MCS 0
IEEE 802.11ac (VHT40)	21	21		MCS 0
IEEE 802.11ax (HEW40)	20.50	21.5		MCS 0
Mode	5210 MHz			Data Rate
IEEE 802.11ac (VHT80)	20.25			MCS 0
IEEE 802.11ax (HEW80)	19.75			MCS 0

UNII-2A				
Mode	5260 MHz	5300 MHz	5320 MHz	Data Rate
IEEE 802.11a	21.25	21.25	21	6 Mbps
IEEE 802.11n (HT20)	21	21	20.5	MCS 0
IEEE 802.11ac (VHT20)	21	21	20.5	MCS 0
IEEE 802.11ax (HEW20)	21.5	21.75	21.75	MCS 0
Mode	5270 MHz	5310 MHz		Data Rate
IEEE 802.11n (HT40)	21	21.25		MCS 0
IEEE 802.11ac (VHT40)	21	21.25		MCS 0
IEEE 802.11ax (HEW40)	21.5	20.50		MCS 0
Mode	5290 MHz			Data Rate
IEEE 802.11ac (VHT80)	21.25			MCS 0
IEEE 802.11ax (HEW80)	20.25			MCS 0

UNII-2C					
Mode	5500 MHz	5580 MHz	5700 MHz	5720 MHz	Data Rate
IEEE 802.11a	20.25	20.25	19.50	19.75	6 Mbps
IEEE 802.11n (HT20)	20.5	20.25	19.50	20.5	MCS 0
IEEE 802.11ac (VHT20)	20.5	19.50	20.5	20.5	MCS 0
IEEE 802.11ax (HEW20)	20.0	18.00	20.5	20.5	MCS 0
Mode	5510 MHz	5550 MHz	5670 MHz	5710 MHz	Data Rate
IEEE 802.11n (HT40)	20.00	19.75	20.75	20.75	MCS 0
IEEE 802.11ac (VHT40)	20.00	21	19.75	20.75	MCS 0
IEEE 802.11ax (HEW40)	21	21	18.75	20.25	MCS 0
Mode	5530 MHz	5610 MHz	5690 MHz		Data Rate
IEEE 802.11ac (VHT80)	19.25	22.25	21.75		MCS 0
IEEE 802.11ax (HEW80)	19.25	21	21.75		MCS 0

UNII-3				
Mode	5745 MHz	5785 MHz	5825 MHz	Data Rate
IEEE 802.11a	20.5	20.25	20	6 Mbps
IEEE 802.11n (HT20)	20.25	20.25	20	MCS 0
IEEE 802.11ac (VHT20)	20.5	20.25	20	MCS 0
IEEE 802.11ax (HEW20)	20.75	21	21	MCS 0
Mode	5755 MHz	5795 MHz		Data Rate
IEEE 802.11n (HT40)	21	20.5		MCS 0
IEEE 802.11ac (VHT40)	21	20.5		MCS 0
IEEE 802.11ax (HEW40)	21	20.75		MCS 0
Mode	5775 MHz			Data Rate
IEEE 802.11ac (VHT80)	21.75			MCS 0
IEEE 802.11ax (HEW80)	20.75			MCS 0

Antenna Mode	MIMO			
Test Software	REALTEK Mass Production Kit mp_V1.0.29			
UNII-1				
Mode	5180 MHz	5200 MHz	5240 MHz	Data Rate
IEEE 802.11a	21.75	21.75	21.5	6 Mbps
IEEE 802.11n (HT20)	21	21.25	21.25	MCS 0
IEEE 802.11ac (VHT20)	21	21.25	21.25	MCS 0
IEEE 802.11ax (HEW20)	21.50	21.75	21.75	MCS 0
Mode	5190 MHz	5230 MHz		Data Rate
IEEE 802.11n (HT40)	21	21		MCS 0
IEEE 802.11ac (VHT40)	21	21		MCS 0
IEEE 802.11ax (HEW40)	20.50	21.5		MCS 0
Mode	5210 MHz			Data Rate
IEEE 802.11ac (VHT80)	20.25			MCS 0
IEEE 802.11ax (HEW80)	19.75			MCS 0

UNII-2A				
Mode	5260 MHz	5300 MHz	5320 MHz	Data Rate
IEEE 802.11a	21.25	21.25	21	6 Mbps
IEEE 802.11n (HT20)	21	21	20.5	MCS 0
IEEE 802.11ac (VHT20)	21	21	20.5	MCS 0
IEEE 802.11ax (HEW20)	21.5	21.75	21.75	MCS 0
Mode	5270 MHz	5310 MHz		Data Rate
IEEE 802.11n (HT40)	21	21.25		MCS 0
IEEE 802.11ac (VHT40)	21	21.25		MCS 0
IEEE 802.11ax (HEW40)	21.5	20.50		MCS 0
Mode	5290 MHz			Data Rate
IEEE 802.11ac (VHT80)	21.25			MCS 0
IEEE 802.11ax (HEW80)	20.25			MCS 0

UNII-2C					
Mode	5500 MHz	5580 MHz	5700 MHz	5720 MHz	Data Rate
IEEE 802.11a	20.25	20.25	19.50	19.75	6 Mbps
IEEE 802.11n (HT20)	20.5	20.25	19.50	20.5	MCS 0
IEEE 802.11ac (VHT20)	20.5	19.50	20.5	20.5	MCS 0
IEEE 802.11ax (HEW20)	20.00	18.00	20.5	20.5	MCS 0
Mode	5510 MHz	5550 MHz	5670 MHz	5710 MHz	Data Rate
IEEE 802.11n (HT40)	20.00	19.75	20.75	20.75	MCS 0
IEEE 802.11ac (VHT40)	20.00	21	19.75	20.75	MCS 0
IEEE 802.11ax (HEW40)	21	21	18.75	20.25	MCS 0
Mode	5530 MHz	5610 MHz	5690 MHz		Data Rate
IEEE 802.11ac (VHT80)	19.25	22.25	21.75		MCS 0
IEEE 802.11ax (HEW80)	19.25	21	21.75		MCS 0

UNII-3				
Mode	5745 MHz	5785 MHz	5825 MHz	Data Rate
IEEE 802.11a	20.5	20.25	20	6 Mbps
IEEE 802.11n (HT20)	20.25	20.25	20	MCS 0
IEEE 802.11ac (VHT20)	20.5	20.25	20	MCS 0
IEEE 802.11ax (HEW20)	20.75	21	21	MCS 0
Mode	5755 MHz	5795 MHz		Data Rate
IEEE 802.11n (HT40)	21	20.5		MCS 0
IEEE 802.11ac (VHT40)	21	20.5		MCS 0
IEEE 802.11ax (HEW40)	21	20.75		MCS 0
Mode	5775 MHz			Data Rate
IEEE 802.11ac (VHT80)	21.75			MCS 0
IEEE 802.11ax (HEW80)	20.75			MCS 0

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	11ax RTL8852BE Combo module
Model Name	RTL8852BE
Brand Name	REALTEK
Model Difference	N/A
Power Supply Rating	DC 3.3V from host equipment
Host device information	
Equipment	Notebook Computer
Model Name	LN0001KA, LN0001KA* (* = 0-9, or blank)
Marketing Name	Lenovo K14 Gen 1
Brand Name	Lenovo
Model Difference	Differ in marketing purpose.
Power Source	DC voltage supplied from External Power Supply. (Lenovo/ ADLX65YLC2D, ADLX65YLC3D, ADLX65YDC3D, ADLX65YDC2D, ADLX65YCC2D, ADLX65YCC3D, ADLX65YAC3D, ADLX65YAC2D)
Power Rating	I/P: 100-240V~1.8A 50-60Hz O/P: DC20.0V 3.25A 65.0W / DC15.0V 3.0A / DC9.0V 2.0A / DC5.0V 2.0A 10.0W
Products Covered	Please refer to Power Source.
Operation Band	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Operation Frequency	UNII-1: 5180 MHz ~ 5240 MHz UNII-2A: 5260 MHz ~ 5320 MHz UNII-2C: 5500 MHz ~ 5720 MHz UNII-3: 5745 MHz ~ 5825 MHz
Maximum Output Power for UNII-1 SISO Main	IEEE 802.11a: 18.32 dBm (0.0679 W) IEEE 802.11n (HT20): 18.13 dBm (0.0650 W) IEEE 802.11n (HT40): 18.13 dBm (0.0650 W) IEEE 802.11ac (VHT20): 18.31 dBm (0.0678 W) IEEE 802.11ac (VHT40): 18.34 dBm (0.0682 W) IEEE 802.11ac (VHT80): 16.44 dBm (0.0441 W) IEEE 802.11ax (HEW20): 18.29 dBm (0.0675 W) IEEE 802.11ax (HEW40): 18.33 dBm (0.0681 W) IEEE 802.11ax (HEW80): 15.57 dBm (0.0361 W)
Maximum Output Power for UNII-2A SISO Main	IEEE 802.11a: 18.34 dBm (0.0682 W) IEEE 802.11n (HT20): 18.14 dBm (0.0652 W) IEEE 802.11n (HT40): 18.05 dBm (0.0638 W) IEEE 802.11ac (VHT20): 18.36 dBm (0.0685 W) IEEE 802.11ac (VHT40): 18.23 dBm (0.0665 W) IEEE 802.11ac (VHT80): 14.24 dBm (0.0265 W) IEEE 802.11ax (HEW20): 18.32 dBm (0.0679 W) IEEE 802.11ax (HEW40): 18.36 dBm (0.0685 W) IEEE 802.11ax (HEW80): 16.42 dBm (0.0439 W)
Maximum Output Power for UNII-2C SISO Main	IEEE 802.11a: 18.33 dBm (0.0681 W) IEEE 802.11n (HT20): 18.13 dBm (0.0650 W) IEEE 802.11n (HT40): 18.07 dBm (0.0641 W) IEEE 802.11ac (VHT20): 18.22 dBm (0.0664 W) IEEE 802.11ac (VHT40): 18.29 dBm (0.0675 W) IEEE 802.11ac (VHT80): 18.34 dBm (0.0682 W) IEEE 802.11ax (HEW20): 18.21 dBm (0.0662 W) IEEE 802.11ax (HEW40): 18.33 dBm (0.0681 W) IEEE 802.11ax (HEW80): 18.27 dBm (0.0671 W)

Maximum Output Power for UNII-3 SISO Main	IEEE 802.11a: 18.30 dBm (0.0676 W) IEEE 802.11n (HT20): 18.11 dBm (0.0647 W) IEEE 802.11n (HT40): 18.09 dBm (0.0644 W) IEEE 802.11ac (VHT20): 18.33 dBm (0.0681 W) IEEE 802.11ac (VHT40): 18.31 dBm (0.0678 W) IEEE 802.11ac (VHT80): 18.35 dBm (0.0684 W) IEEE 802.11ax (HEW20): 18.33 dBm (0.0681 W) IEEE 802.11ax (HEW40): 18.34 dBm (0.0682 W) IEEE 802.11ax (HEW80): 18.24 dBm (0.0667 W)
Maximum Output Power for Straddle Channel SISO Main	IEEE 802.11a: 12.12 dBm (0.0163 W) IEEE 802.11n (HT20): 12.10 dBm (0.0162 W) IEEE 802.11n (HT40): 13.08 dBm (0.0203 W) IEEE 802.11ac (VHT20): 12.65 dBm (0.0184 W) IEEE 802.11ac (VHT40): 12.95 dBm (0.0197 W) IEEE 802.11ac (VHT80): 15.11 dBm (0.0324 W) IEEE 802.11ax (HEW20): 12.09 dBm (0.0162 W) IEEE 802.11ax (HEW40): 12.59 dBm (0.0182 W) IEEE 802.11ax (HEW80): 15.89 dBm (0.0388 W)
Maximum Output Power for UNII-1 SISO Aux	IEEE 802.11a: 18.30 dBm (0.0676 W) IEEE 802.11n (HT20): 18.12 dBm (0.0649 W) IEEE 802.11n (HT40): 18.16 dBm (0.0655 W) IEEE 802.11ac (VHT20): 18.29 dBm (0.0675 W) IEEE 802.11ac (VHT40): 18.30 dBm (0.0676 W) IEEE 802.11ac (VHT80): 16.14 dBm (0.0411 W) IEEE 802.11ax (HEW20): 18.35 dBm (0.0684 W) IEEE 802.11ax (HEW40): 18.25 dBm (0.0668 W) IEEE 802.11ax (HEW80): 15.90 dBm (0.0389 W)
Maximum Output Power for UNII-2A SISO Aux	IEEE 802.11a: 18.31 dBm (0.0678 W) IEEE 802.11n (HT20): 18.16 dBm (0.0655 W) IEEE 802.11n (HT40): 18.10 dBm (0.0646 W) IEEE 802.11ac (VHT20): 18.30 dBm (0.0676 W) IEEE 802.11ac (VHT40): 18.29 dBm (0.0675 W) IEEE 802.11ac (VHT80): 17.26 dBm (0.0532 W) IEEE 802.11ax (HEW20): 18.32 dBm (0.0679 W) IEEE 802.11ax (HEW40): 18.29 dBm (0.0675 W) IEEE 802.11ax (HEW80): 16.58 dBm (0.0455 W)
Maximum Output Power for UNII-2C SISO Aux	IEEE 802.11a: 18.28 dBm (0.0673 W) IEEE 802.11n (HT20): 18.09 dBm (0.0644 W) IEEE 802.11n (HT40): 18.15 dBm (0.0653 W) IEEE 802.11ac (VHT20): 18.30 dBm (0.0676 W) IEEE 802.11ac (VHT40): 18.30 dBm (0.0676 W) IEEE 802.11ac (VHT80): 18.28 dBm (0.0673 W) IEEE 802.11ax (HEW20): 18.31 dBm (0.0678 W) IEEE 802.11ax (HEW40): 18.33 dBm (0.0681 W) IEEE 802.11ax (HEW80): 18.30 dBm (0.0676 W)
Maximum Output Power for UNII-3 SISO Aux	IEEE 802.11a: 18.33 dBm (0.0681 W) IEEE 802.11n (HT20): 18.10 dBm (0.0646 W) IEEE 802.11n (HT40): 18.10 dBm (0.0646 W) IEEE 802.11ac (VHT20): 18.33 dBm (0.0681 W) IEEE 802.11ac (VHT40): 18.31 dBm (0.0678 W) IEEE 802.11ac (VHT80): 18.29 dBm (0.0675 W) IEEE 802.11ax (HEW20): 18.32 dBm (0.0679 W) IEEE 802.11ax (HEW40): 18.33 dBm (0.0681 W) IEEE 802.11ax (HEW80): 18.33 dBm (0.0681 W)

Maximum Output Power for Straddle Channel SISO Aux	IEEE 802.11a: 12.62 dBm (0.0183 W) IEEE 802.11n (HT20): 12.21 dBm (0.0166 W) IEEE 802.11n (HT40): 13.08 dBm (0.0203 W) IEEE 802.11ac (VHT20): 12.58 dBm (0.0181 W) IEEE 802.11ac (VHT40): 13.06 dBm (0.0202 W) IEEE 802.11ac (VHT80): 15.08 dBm (0.0322 W) IEEE 802.11ax (HEW20): 12.21 dBm (0.0166 W) IEEE 802.11ax (HEW40): 12.95 dBm (0.0197 W) IEEE 802.11ax (HEW80): 16.08 dBm (0.0406 W)
Maximum Output Power for UNII-1 MIMO	IEEE 802.11a: 21.46 dBm (0.1400 W) IEEE 802.11n (HT20): 21.27 dBm (0.1340 W) IEEE 802.11n (HT40): 21.28 dBm (0.1341 W) IEEE 802.11ac (VHT20): 21.48 dBm (0.1405 W) IEEE 802.11ac (VHT40): 21.47 dBm (0.1403 W) IEEE 802.11ac (VHT80): 19.48 dBm (0.0887 W) IEEE 802.11ax (HEW20): 21.48 dBm (0.1406 W) IEEE 802.11ax (HEW40): 21.44 dBm (0.1393 W) IEEE 802.11ax (HEW80): 18.90 dBm (0.0776 W)
Maximum Output Power for UNII-2A MIMO	IEEE 802.11a: 21.47 dBm (0.1403 W) IEEE 802.11n (HT20): 21.29 dBm (0.1346 W) IEEE 802.11n (HT40): 21.25 dBm (0.1334 W) IEEE 802.11ac (VHT20): 21.48 dBm (0.1406 W) IEEE 802.11ac (VHT40): 21.45 dBm (0.1396 W) IEEE 802.11ac (VHT80): 19.17 dBm (0.0827 W) IEEE 802.11ax (HEW20): 21.48 dBm (0.1405 W) IEEE 802.11ax (HEW40): 21.43 dBm (0.1390 W) IEEE 802.11ax (HEW80): 19.66 dBm (0.0924 W)
Maximum Output Power for UNII-2C MIMO	IEEE 802.11a: 21.47 dBm (0.1403 W) IEEE 802.11n (HT20): 21.27 dBm (0.1340 W) IEEE 802.11n (HT40): 21.26 dBm (0.1337 W) IEEE 802.11ac (VHT20): 21.41 dBm (0.1384 W) IEEE 802.11ac (VHT40): 21.45 dBm (0.1395 W) IEEE 802.11ac (VHT80): 21.47 dBm (0.1403 W) IEEE 802.11ax (HEW20): 21.43 dBm (0.1388 W) IEEE 802.11ax (HEW40): 21.47 dBm (0.1403 W) IEEE 802.11ax (HEW80): 21.43 dBm (0.1388 W)
Maximum Output Power for UNII-3 MIMO	IEEE 802.11a: 21.46 dBm (0.1400 W) IEEE 802.11n (HT20): 21.28 dBm (0.1341 W) IEEE 802.11n (HT40): 21.25 dBm (0.1334 W) IEEE 802.11ac (VHT20): 21.46 dBm (0.1398 W) IEEE 802.11ac (VHT40): 21.46 dBm (0.1400 W) IEEE 802.11ac (VHT80): 21.47 dBm (0.1403 W) IEEE 802.11ax (HEW20): 21.49 dBm (0.1408 W) IEEE 802.11ax (HEW40): 21.47 dBm (0.1403 W) IEEE 802.11ax (HEW80): 21.44 dBm (0.1392 W)

Maximum Output Power for Straddle Channel MIMO	IEEE 802.11a: 15.28 dBm (0.0337 W) IEEE 802.11n (HT20): 15.13 dBm (0.0325 W) IEEE 802.11n (HT40): 16.17 dBm (0.0414 W) IEEE 802.11ac (VHT20): 15.59 dBm (0.0362 W) IEEE 802.11ac (VHT40): 16.21 dBm (0.0418 W) IEEE 802.11ac (VHT80): 18.18 dBm (0.0657 W) IEEE 802.11ax (HEW20): 15.23 dBm (0.0333 W) IEEE 802.11ax (HEW40): 16.11 dBm (0.0408 W) IEEE 802.11ax (HEW80): 19.08 dBm (0.0809 W)
Test Model	Lenovo K14 Gen 1
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

(1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

(2) Channel List:

UNII-1					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

UNII-3					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

(3) Table for Filed Antenna:

Antenna	Manufacture	Part Number	Type	Connector	Frequency Range (MHz)	Gain (dBi)
Main	LUXSHARE-ICT	DC33001VP00	PIFA	I-PEX	2400-2500	1.88
					5150-5350	2.65
					5470-5725	2.99
					5725-5850	2.81
Aux	LUXSHARE-ICT	DC33001VP00	PIFA	I-PEX	2400-2500	1.92
					5150-5350	2.70
					5470-5725	2.77
					5725-5850	2.85
Antenna	Manufacture	Part Number	Type	Connector	Frequency Range (MHz)	Gain (dBi)
Main	LUXSHARE-ICT	DC33001XX00	PIFA	I-PEX	2400-2500	1.83
					5150-5350	2.63
					5470-5725	2.96
					5725-5850	2.78
Aux	LUXSHARE-ICT	DC33001XX00	PIFA	I-PEX	2400-2500	1.91
					5150-5350	2.68
					5470-5725	2.67
					5725-5850	2.82

Antenna	Manufacture	Part Number	Type	Connector	Frequency Range (MHz)	Gain (dBi)
Main	Speedwire	DC33001VN00	PIFA	I-PEX	2400-2500	1.69
					5150-5350	2.72
					5470-5725	2.50
					5725-5850	2.83
Aux	Speedwire	DC33001VN00	PIFA	I-PEX	2400-2500	1.75
					5150-5350	2.98
					5470-5725	2.97
					5725-5850	2.87
Antenna	Manufacture	Part Number	Type	Connector	Frequency Range (MHz)	Gain (dBi)
Main	Speedwire	DC33001XV00	PIFA	I-PEX	2400-2500	1.79
					5150-5350	2.36
					5470-5725	2.32
					5725-5850	2.52
Aux	Speedwire	DC33001XV00	PIFA	I-PEX	2400-2500	1.88
					5150-5350	2.58
					5470-5725	2.59
					5725-5850	2.50

NOTE: Antenna gain higher is used for testing.

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11a	48	-
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11a	36/48 52/64	Bandedge
	IEEE 802.11ac (VHT20)	100/140 149/165	
	IEEE 802.11ac (VHT40)	38/46 54/62 102/134 151/159	
	IEEE 802.11ac (VHT80)	42 58 106/122 155	
	IEEE 802.11a	36/40/48 52/60/64	Harmonic
	IEEE 802.11ac (VHT20)	100/116/140/144 149/157/165	
	IEEE 802.11ac (VHT40)	38/46/54/62 102/110/134/142 151/159	
	IEEE 802.11ac (VHT80)	42/58 106/122/138 155	
Output Power	IEEE 802.11a	36/40/48 52/60/64	-
	IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)	100/116/140/144 149/157/165	
	IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)	38/46/54/62 102/110/134/142 151/159	
	IEEE 802.11ac (VHT80)	42/58 106/122/138 155	


NOTE:

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.
- (3) All X, Y and Z axes are evaluated, but only the worst case (Y axis) is recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC Power Line Conducted Emissions Test

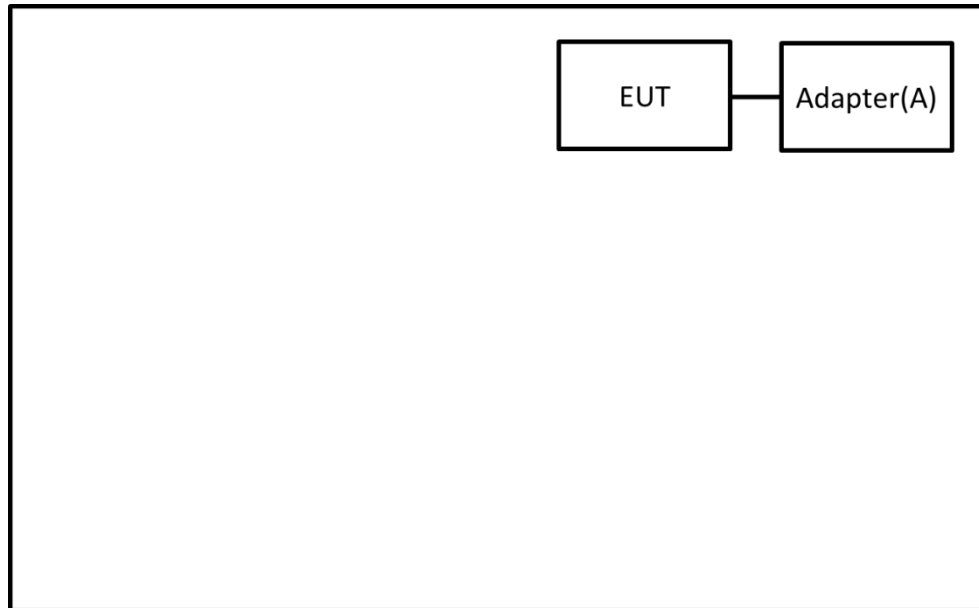

Radiated Emissions Test

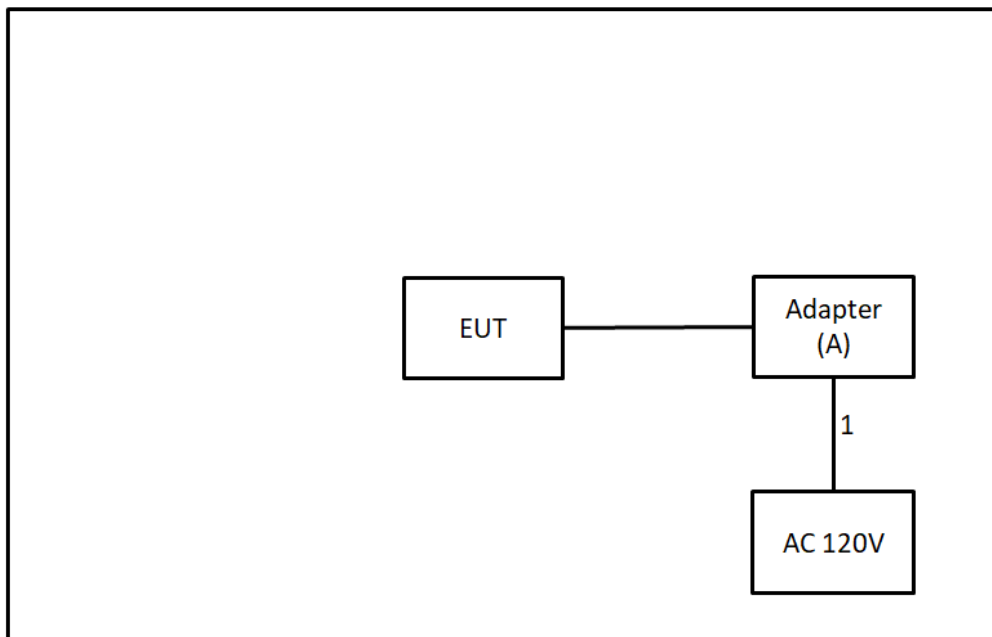

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	Lenovo	ADLX45YDC3D	N/A	Supplied by test requester.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	0.9m	Power Cord	Supplied by test requester.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

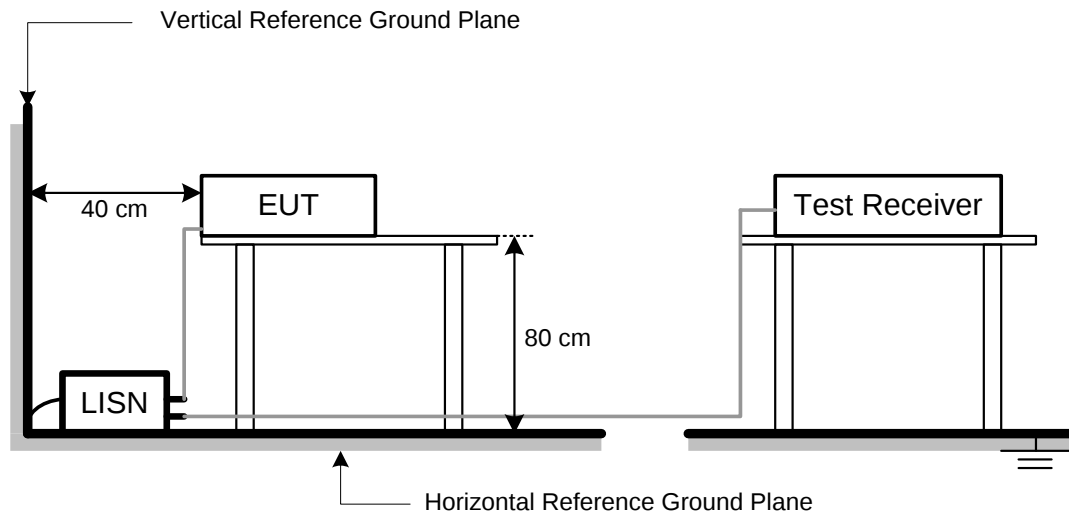

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
19.11	+	2.11	=	21.22

Measurement Value		Limit Value		Margin Level
21.22	-	68.3	=	-47.08

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

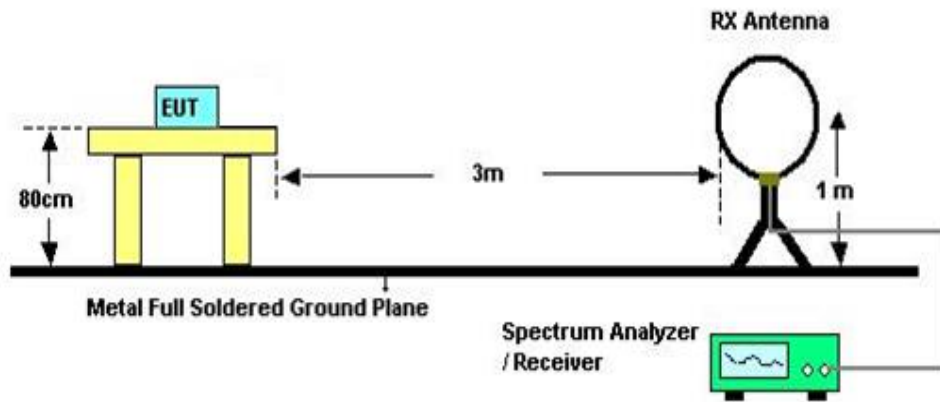

30 MHz to 1 GHz

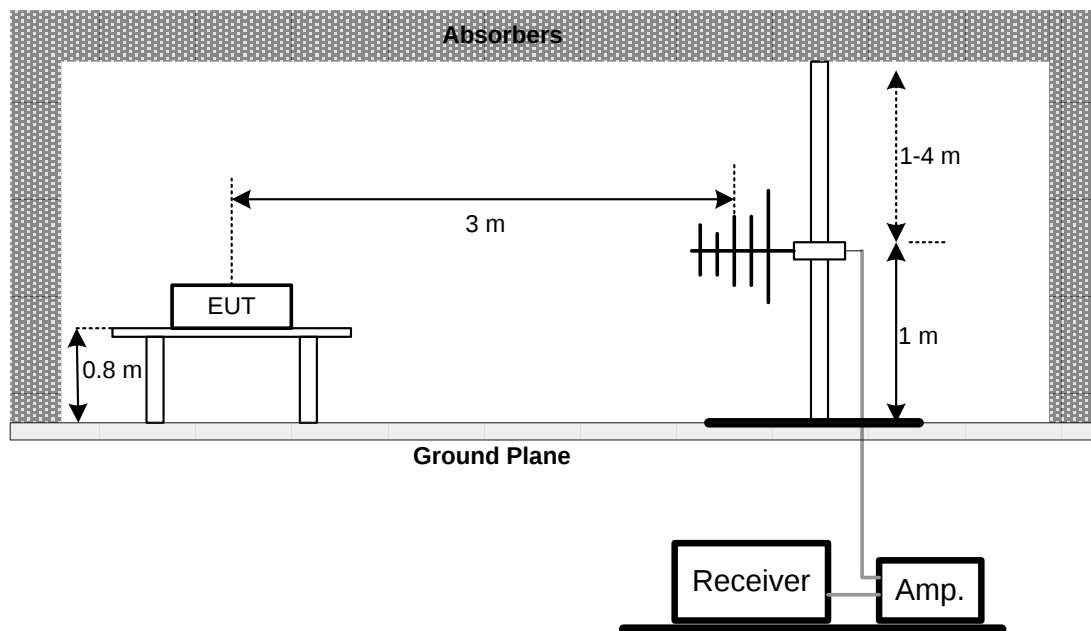

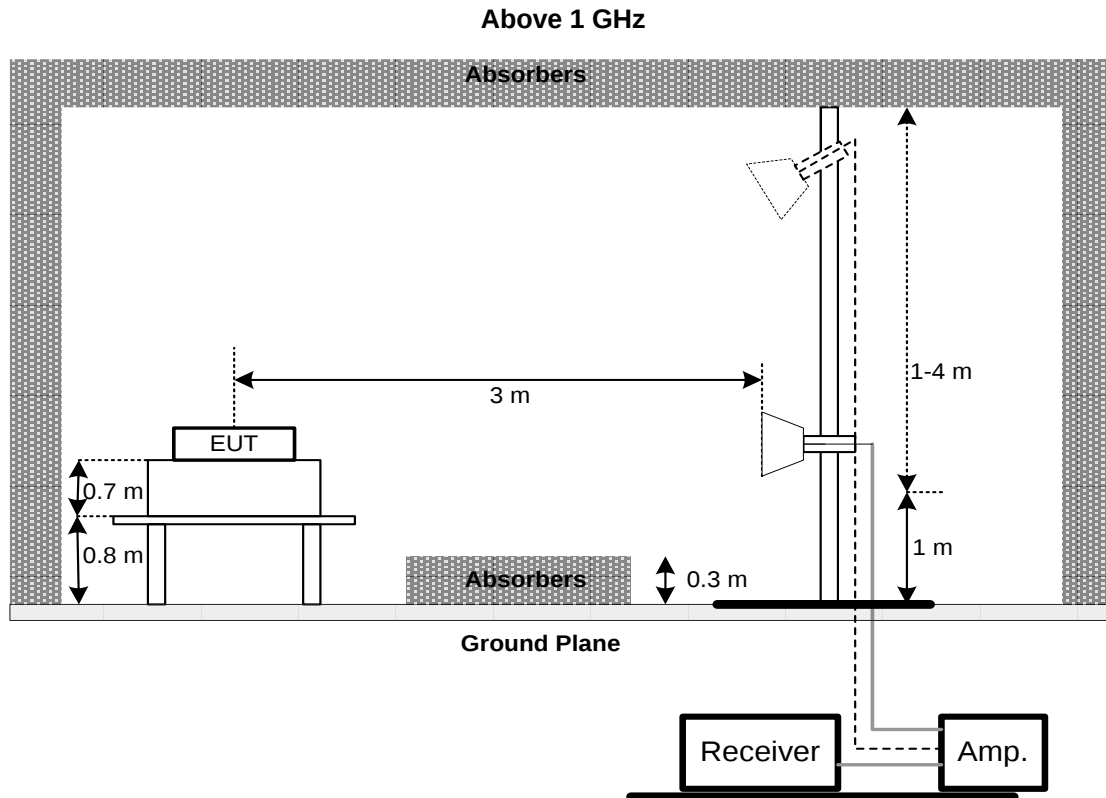

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

NOTE:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 OUTPUT POWER TEST

5.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	Fixed:1 Watt (30 dBm) Mobile and portable: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		1 Watt (30dBm)	5470-5725
			5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).

5.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum peak conducted output power was performed in accordance with method of clause E. 3. a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - Method PM (Measurement using an RF average power meter):
 - Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
 - Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX D.

6 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101339	2021/3/10	2022/3/9
2	Test Cable	EMCI	EMCCFD300-BM-BMR-6000	170714	2021/6/7	2022/6/6
3	EMI Test Receiver	R&S	ESR 7	101433	2021/11/24	2022/11/23
4	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC02325	980217	2021/4/8	2022/4/7
2	Preamplifier	EMCI	EMC012645B	980222	2021/4/8	2022/4/7
3	Preamplifier	EMCI	EMC184045SE	980512	2021/5/28	2022/5/27
4	Preamplifier	EMCI	EMC001340	980555	2021/4/8	2022/4/7
5	Test Cable	EMCI	EMC104-SM-1000	180809	2021/4/8	2022/4/7
6	Test Cable	EMCI	EMC104-SM-SM-3000	151205	2021/4/8	2022/4/7
7	Test Cable	EMCI	EMC-SM-SM-7000	180408	2021/4/8	2022/4/7
8	MXE EMI Receiver	Agilent	N9038A	MY56400087	2021/5/27	2022/5/26
9	Signal Analyzer	Agilent	N9010A	MY56480554	2021/8/25	2022/8/24
10	Loop Ant	Electro-Metrics	EMCI-LPA600	274	2021/6/1	2022/5/31
11	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2021/6/2	2022/6/1
12	Horn Ant	Schwarzbeck	BBHA 9170	340	2021/7/9	2022/7/8
13	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-352	2021/8/11	2022/8/10
14	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0625	2021/8/11	2022/8/10
15	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Power Meter	Anritsu	ML2487A	6K00004714	2021/8/15	2022/8/14
2	Power Sensor	Anritsu	MA2491A	034138	2021/8/15	2022/8/14

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

7 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2108T113A-FCCP-1 (APPENDIX-TEST PHOTOS).

8 EUT PHOTOS

Please refer to document Appendix No.: EP-2108T113A-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2021/12/8
Test Frequency	-	Phase	Line

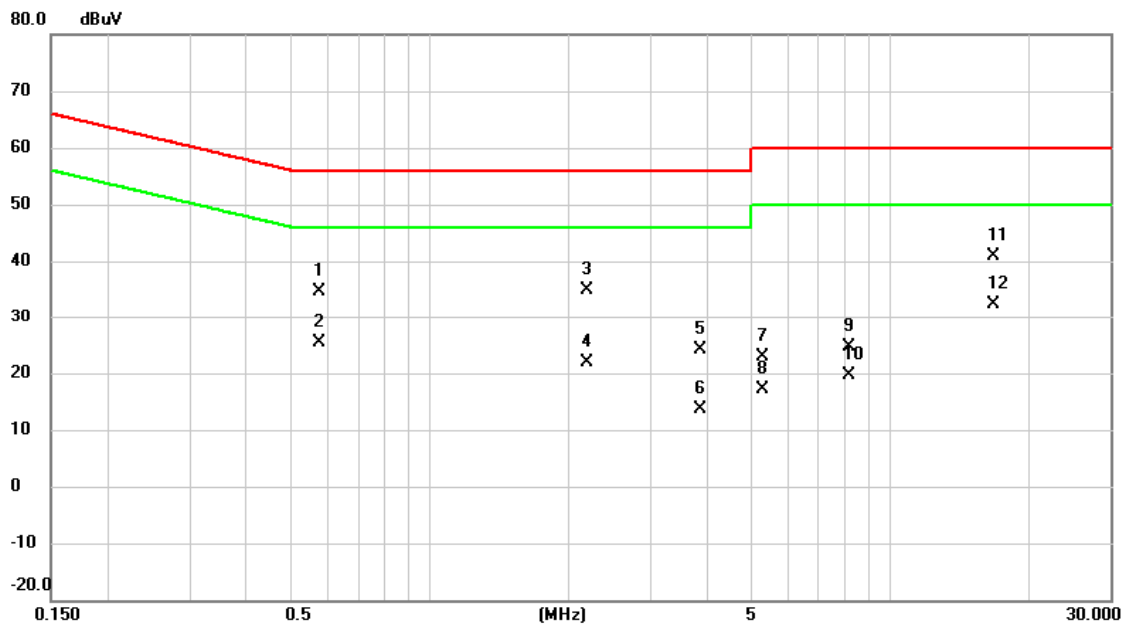


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.5775	24.85	9.73	34.58	56.00	-21.42	QP	
2		0.5775	15.63	9.73	25.36	46.00	-20.64	AVG	
3		2.1908	25.06	9.78	34.84	56.00	-21.16	QP	
4		2.1908	12.19	9.78	21.97	46.00	-24.03	AVG	
5		3.8445	14.16	9.88	24.04	56.00	-31.96	QP	
6		3.8445	3.72	9.88	13.60	46.00	-32.40	AVG	
7		5.3024	12.82	9.99	22.81	60.00	-37.19	QP	
8		5.3024	7.03	9.99	17.02	50.00	-32.98	AVG	
9		8.1713	14.66	10.06	24.72	60.00	-35.28	QP	
10		8.1713	9.52	10.06	19.58	50.00	-30.42	AVG	
11		16.7798	30.69	10.20	40.89	60.00	-19.11	QP	
12	*	16.7798	22.10	10.20	32.30	50.00	-17.70	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2021/12/8
Test Frequency	-	Phase	Neutral

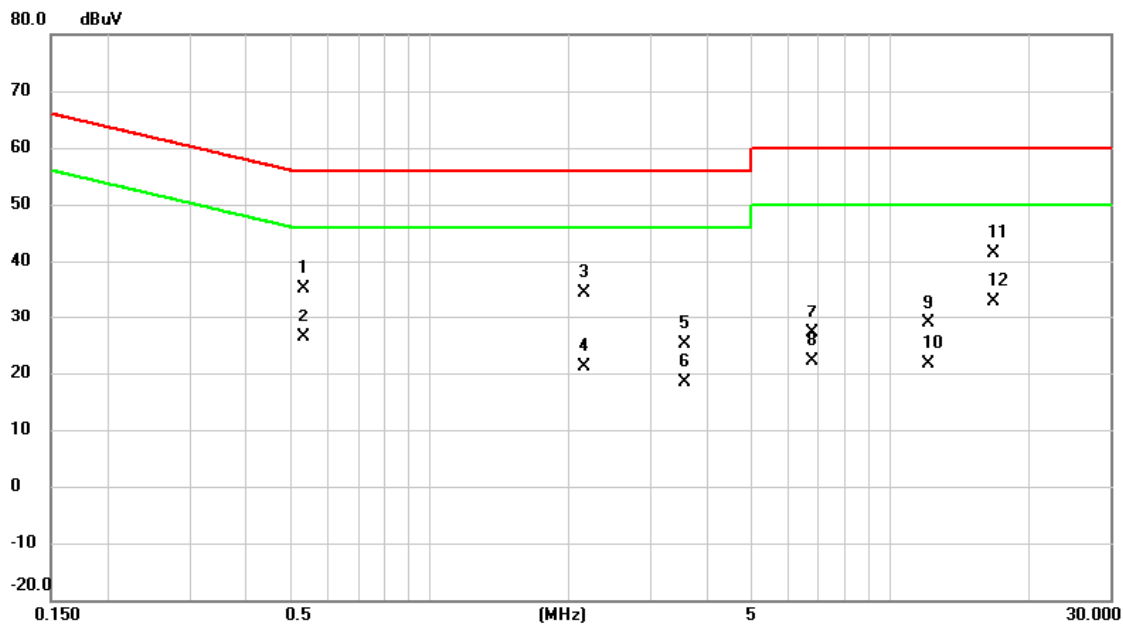


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.5347	25.49	9.74	35.23	56.00	-20.77	QP	
2		0.5347	16.74	9.74	26.48	46.00	-19.52	AVG	
3		2.1660	24.56	9.78	34.34	56.00	-21.66	QP	
4		2.1660	11.26	9.78	21.04	46.00	-24.96	AVG	
5		3.5678	15.17	9.87	25.04	56.00	-30.96	QP	
6		3.5678	8.40	9.87	18.27	46.00	-27.73	AVG	
7		6.7650	17.03	10.05	27.08	60.00	-32.92	QP	
8		6.7650	12.06	10.05	22.11	50.00	-27.89	AVG	
9		12.1358	18.75	10.20	28.95	60.00	-31.05	QP	
10		12.1358	11.50	10.20	21.70	50.00	-28.30	AVG	
11		16.7100	31.15	10.29	41.44	60.00	-18.56	QP	
12	*	16.7100	22.53	10.29	32.82	50.00	-17.18	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/12/8
Test Frequency	-	Phase	Line

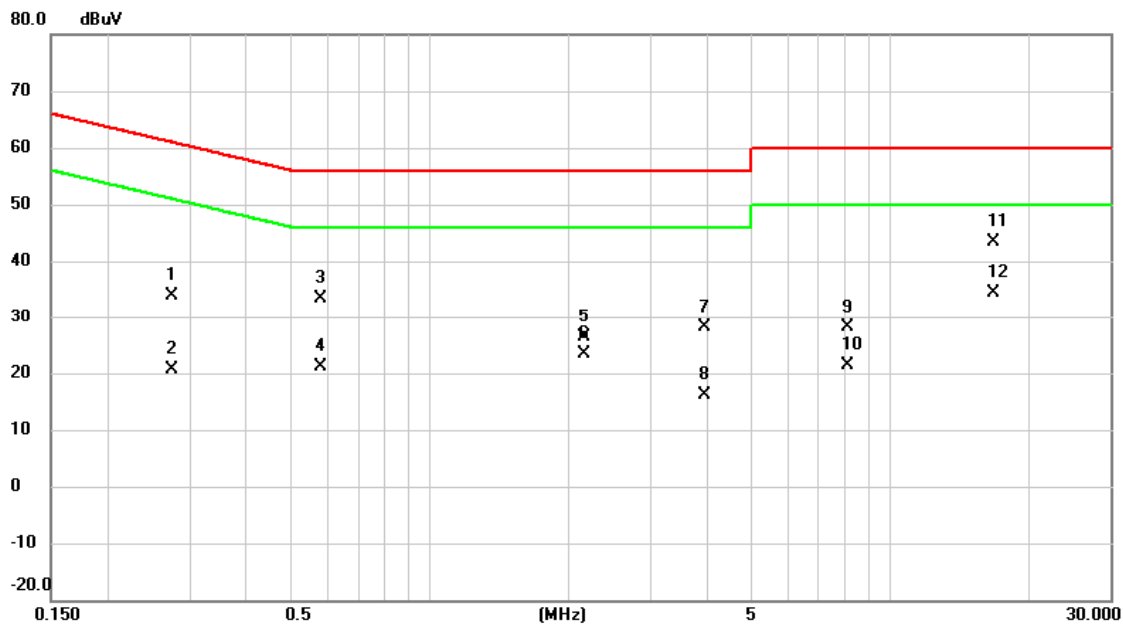


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2737	24.06	9.73	33.79	61.00	-27.21	QP	
2		0.2737	10.97	9.73	20.70	51.00	-30.30	AVG	
3		0.5797	23.56	9.73	33.29	56.00	-22.71	QP	
4		0.5797	11.29	9.73	21.02	46.00	-24.98	AVG	
5		2.1570	16.68	9.77	26.45	56.00	-29.55	QP	
6		2.1570	13.53	9.77	23.30	46.00	-22.70	AVG	
7		3.9300	18.12	9.89	28.01	56.00	-27.99	QP	
8		3.9300	6.26	9.89	16.15	46.00	-29.85	AVG	
9		8.1173	17.96	10.06	28.02	60.00	-31.98	QP	
10		8.1173	11.39	10.06	21.45	50.00	-28.55	AVG	
11		16.7775	33.29	10.20	43.49	60.00	-16.51	QP	
12	*	16.7775	24.18	10.20	34.38	50.00	-15.62	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/12/8
Test Frequency	-	Phase	Neutral

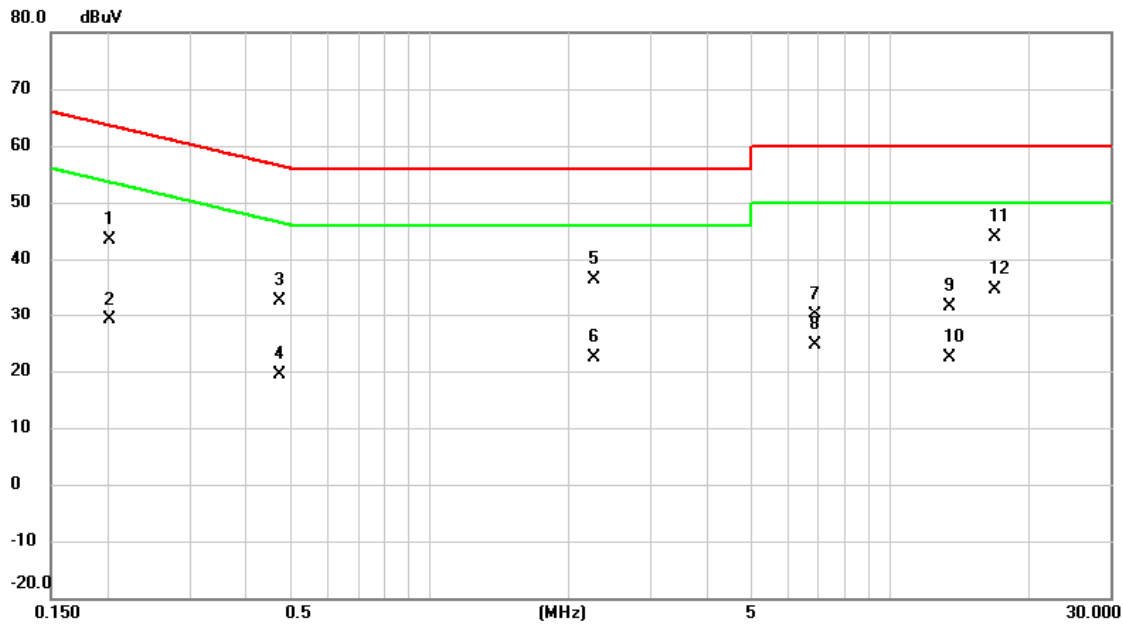

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2017	33.63	9.72	43.35	63.54	-20.19	QP	
2		0.2017	19.35	9.72	29.07	53.54	-24.47	AVG	
3		0.4717	22.85	9.74	32.59	56.48	-23.89	QP	
4		0.4717	9.75	9.74	19.49	46.48	-26.99	AVG	
5		2.2628	26.71	9.79	36.50	56.00	-19.50	QP	
6		2.2628	12.62	9.79	22.41	46.00	-23.59	AVG	
7		6.8573	20.03	10.05	30.08	60.00	-29.92	QP	
8		6.8573	14.52	10.05	24.57	50.00	-25.43	AVG	
9		13.4093	21.34	10.22	31.56	60.00	-28.44	QP	
10		13.4093	12.26	10.22	22.48	50.00	-27.52	AVG	
11		16.8743	33.56	10.29	43.85	60.00	-16.15	QP	
12	*	16.8743	24.41	10.29	34.70	50.00	-15.30	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5240MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

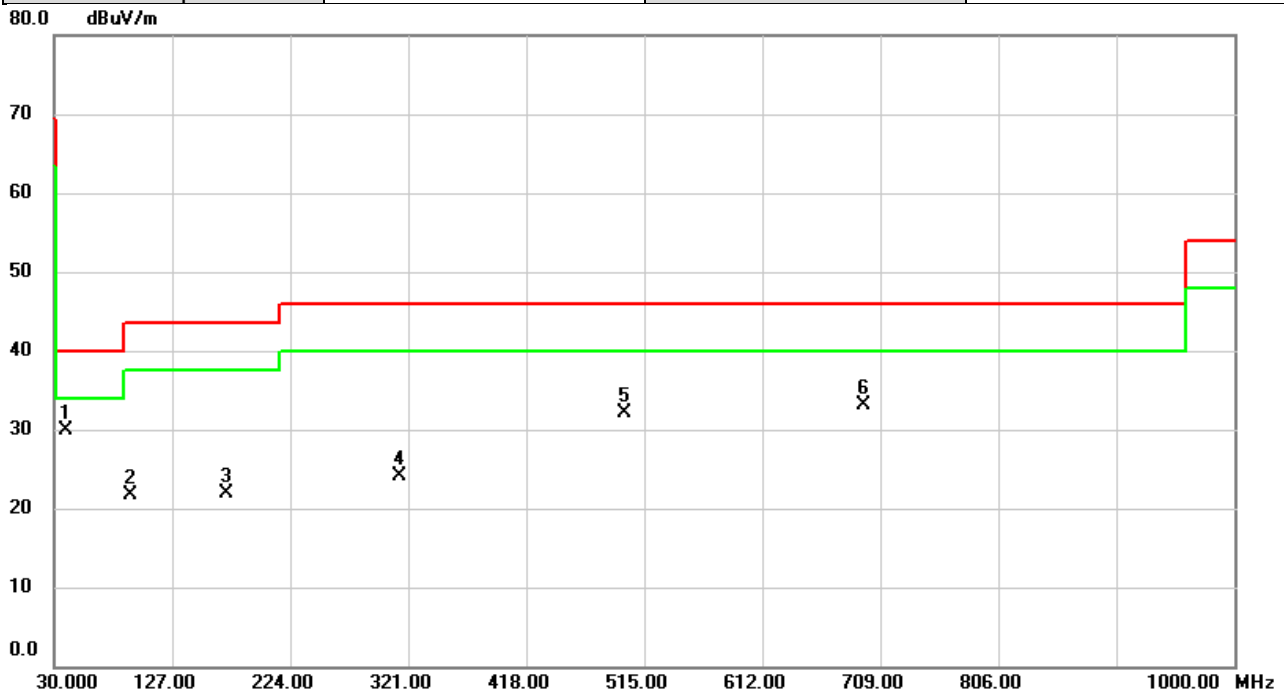


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39.5383	39.14	-9.22	29.92	40.00	-10.08	peak	
2		92.2093	36.43	-14.82	21.61	43.50	-21.89	peak	
3		171.1997	31.39	-9.53	21.86	43.50	-21.64	peak	
4		314.4040	32.09	-7.96	24.13	46.00	-21.87	peak	
5		499.3830	35.66	-3.65	32.01	46.00	-13.99	peak	
6		696.0343	32.95	0.06	33.01	46.00	-12.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5240MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

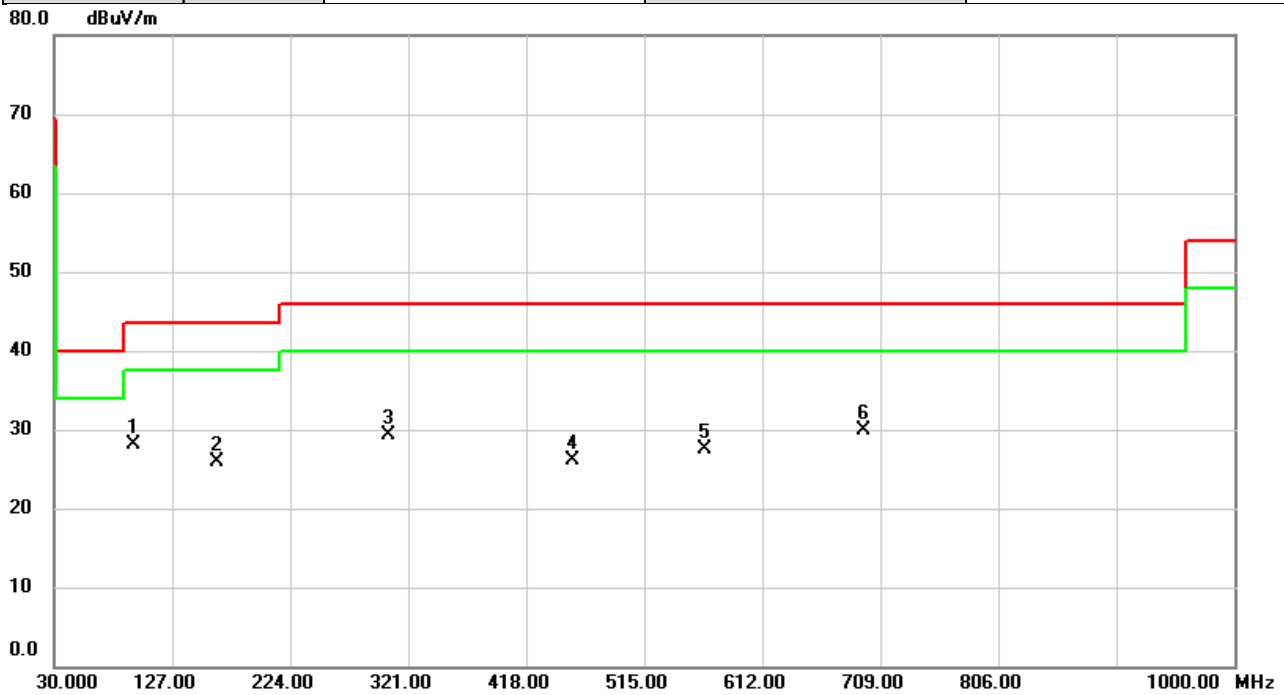


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	95.4426	42.40	-14.39	28.01	43.50	-15.49	peak	
2		163.5043	34.95	-9.13	25.82	43.50	-17.68	peak	
3		305.4153	37.40	-8.14	29.26	46.00	-16.74	peak	
4		456.0240	30.30	-4.29	26.01	46.00	-19.99	peak	
5		565.1813	29.74	-2.18	27.56	46.00	-18.44	peak	
6		696.0343	29.75	0.06	29.81	46.00	-16.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2021/12/8
Test Frequency	5180MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

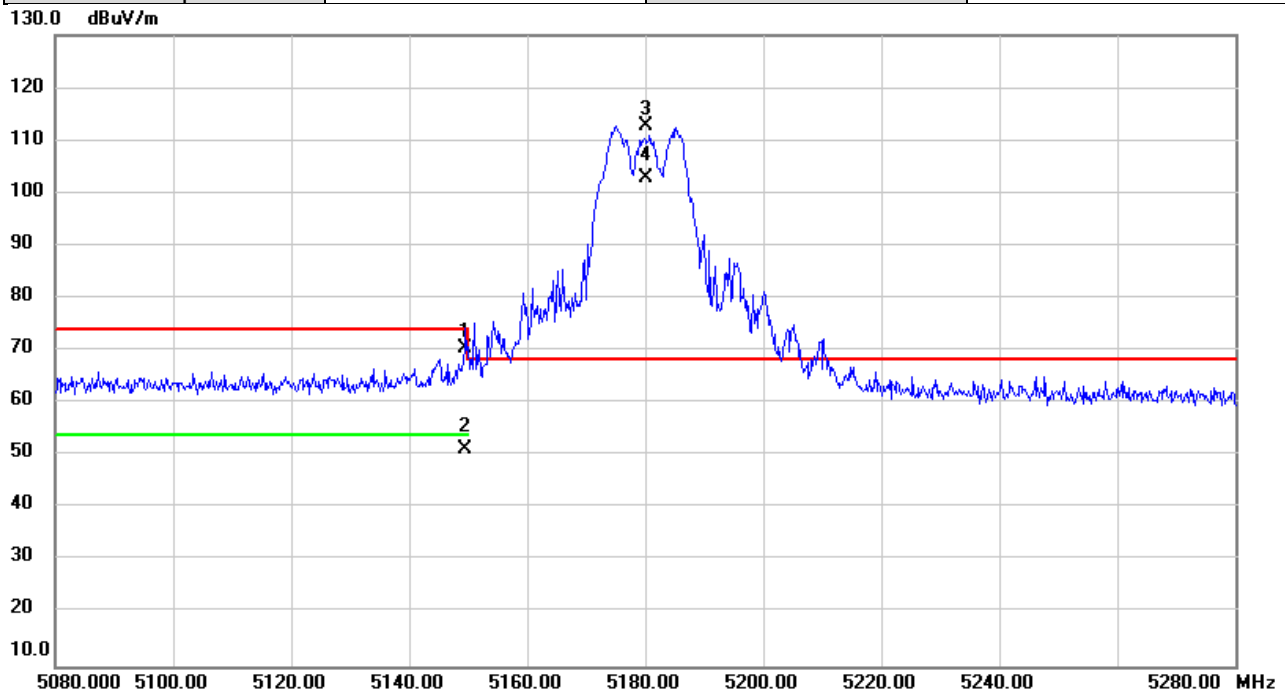


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5149.373	33.19	37.34	70.53	74.00	-3.47	peak	
2		5149.373	14.03	37.34	51.37	54.00	-2.63	AVG	
3	*	5180.000	75.48	37.38	112.86	68.20	44.66	peak	NoLimit
4	X	5180.000	65.38	37.38	102.76	68.20	34.56	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/8
Test Frequency	5240MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

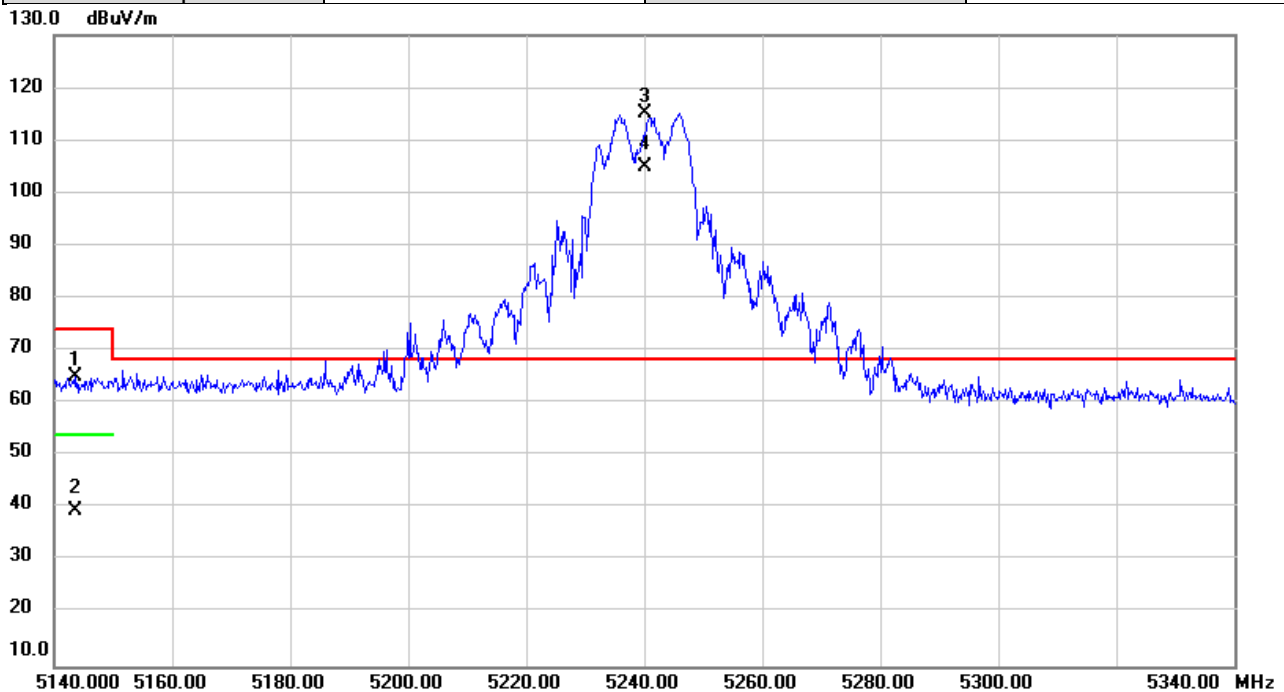


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5143.693	27.66	37.33	64.99	74.00	-9.01	peak	
2		5143.693	2.23	37.33	39.56	54.00	-14.44	AVG	
3	*	5240.000	77.59	37.46	115.05	68.20	46.85	peak	NoLimit
4	X	5240.000	67.50	37.46	104.96	68.20	36.76	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/8
Test Frequency	5260MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

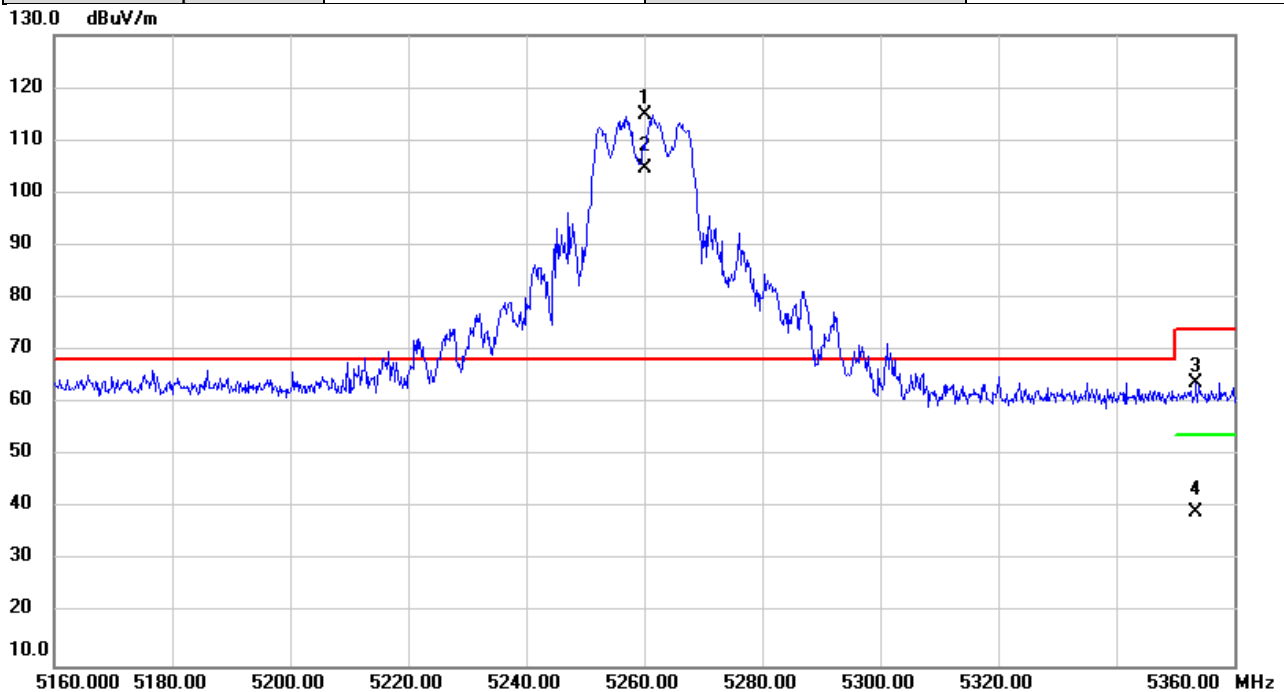


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5260.000	77.23	37.49	114.72	68.20	46.52	peak	NoLimit
2	X	5260.000	67.28	37.49	104.77	68.20	36.57	AVG	NoLimit
3		5353.500	26.21	37.61	63.82	74.00	-10.18	peak	
4		5353.500	1.64	37.61	39.25	54.00	-14.75	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/8
Test Frequency	5320MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

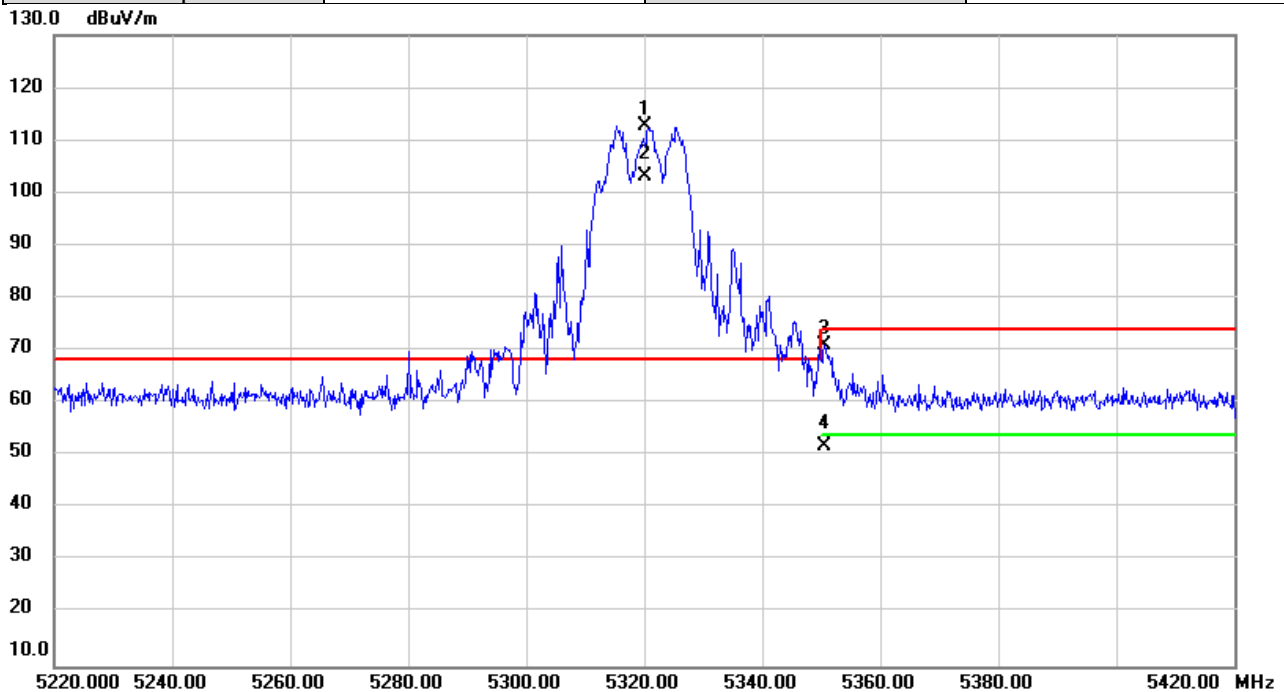


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	75.21	37.57	112.78	68.20	44.58	peak	NoLimit
2	X	5320.000	65.47	37.57	103.04	68.20	34.84	AVG	NoLimit
3		5350.553	33.29	37.61	70.90	74.00	-3.10	peak	
4		5350.553	14.14	37.61	51.75	54.00	-2.25	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/8
Test Frequency	5500MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

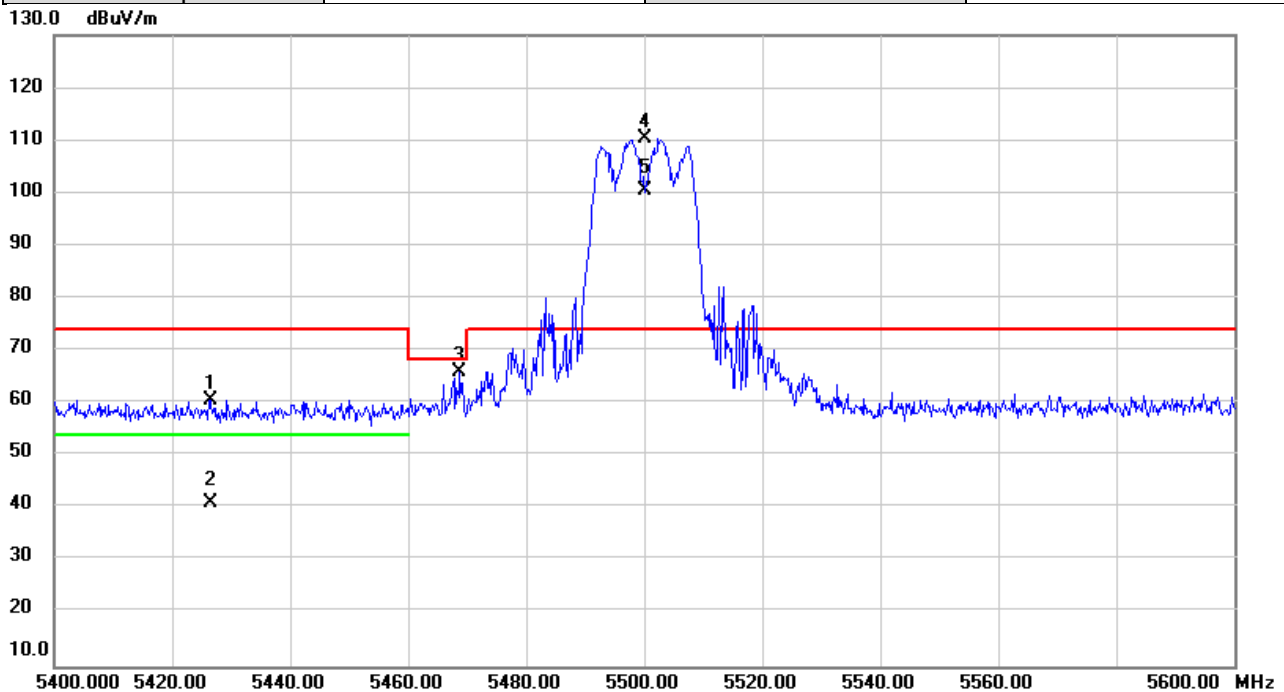


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5426.587	22.80	37.71	60.51	74.00	-13.49	peak	
2		5426.587	3.20	37.71	40.91	54.00	-13.09	AVG	
3		5468.713	28.07	37.76	65.83	68.20	-2.37	peak	
4	*	5500.000	72.54	37.81	110.35	74.00	36.35	peak	NoLimit
5	X	5500.000	62.75	37.81	100.56	74.00	26.56	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/8
Test Frequency	5700MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

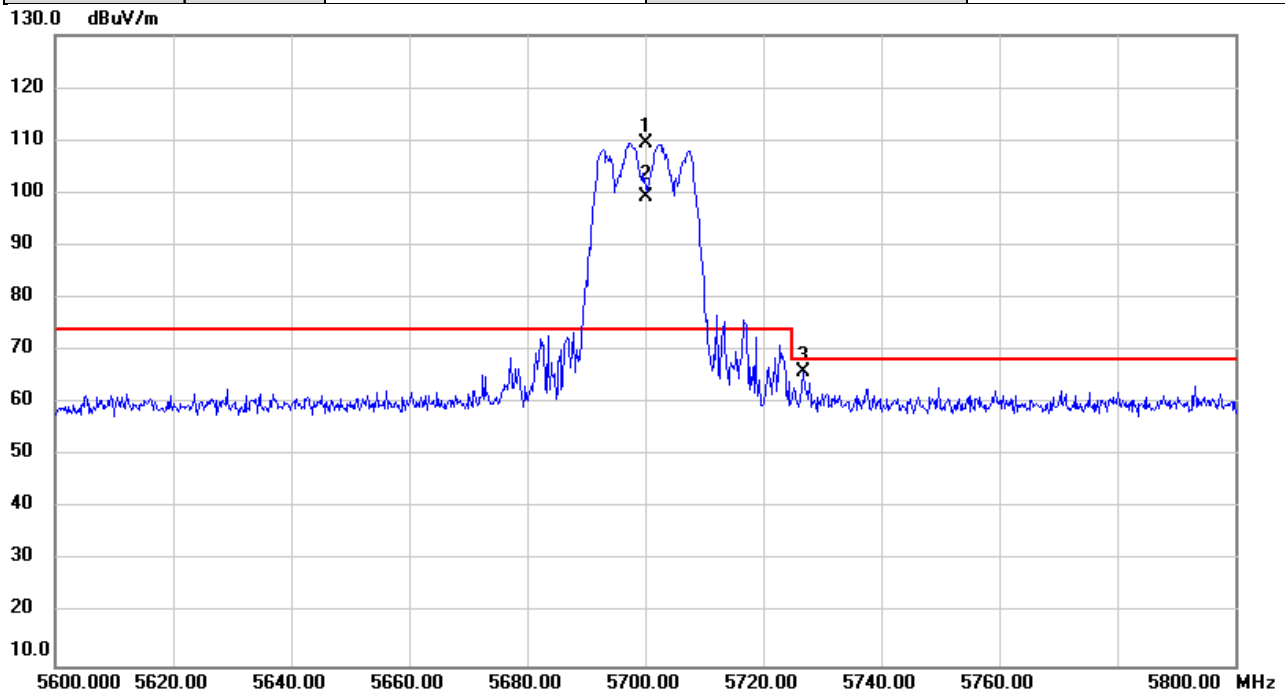


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	71.12	38.26	109.38	74.00	35.38	peak	NoLimit
2	X	5700.000	61.04	38.26	99.30	74.00	25.30	AVG	NoLimit
3		5726.700	27.69	38.32	66.01	68.20	-2.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/8
Test Frequency	5745MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

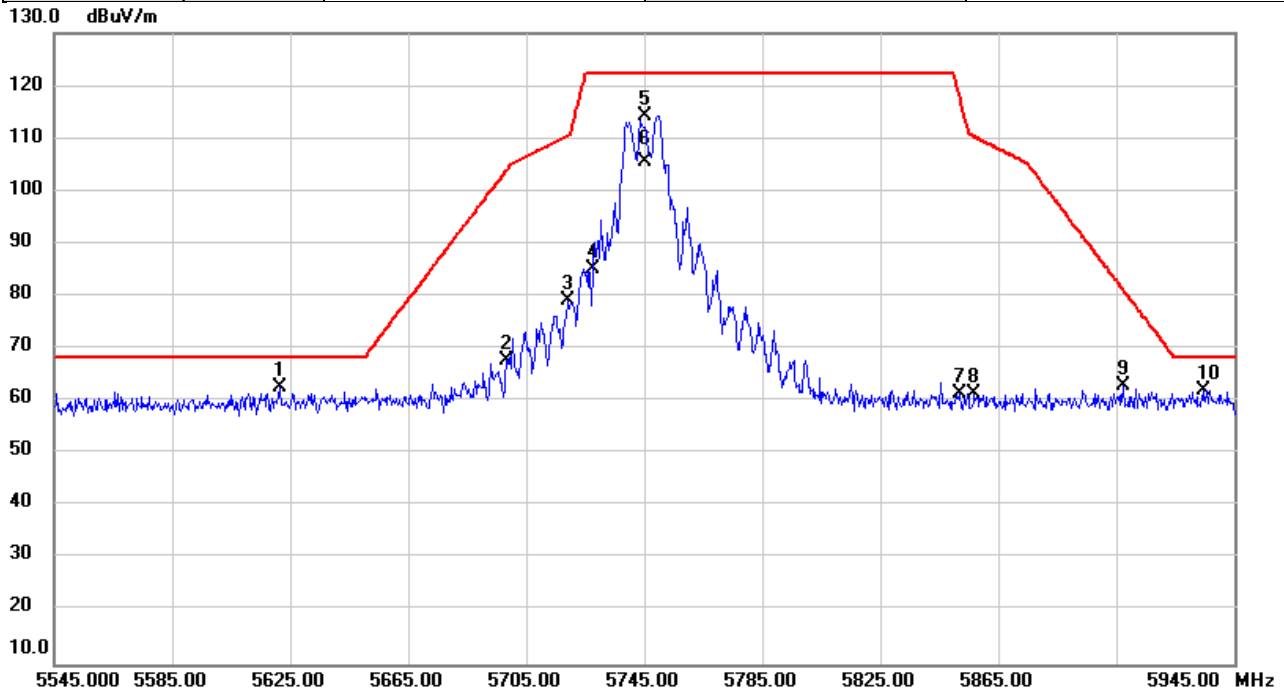


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5621.360	24.68	38.08	62.76	68.20	-5.44	peak	
2		5698.587	29.35	38.26	67.61	104.16	-36.55	peak	
3		5719.013	40.77	38.30	79.07	110.52	-31.45	peak	
4		5727.720	46.90	38.32	85.22	122.20	-36.98	peak	
5		5745.000	76.02	38.36	114.38	122.20	-7.82	peak	NoLimit
6		5745.000	67.21	38.36	105.57	122.20	-16.63	AVG	NoLimit
7		5851.827	22.72	38.60	61.32	118.03	-56.71	peak	
8		5856.960	22.85	38.61	61.46	110.25	-48.79	peak	
9		5907.373	24.30	38.72	63.02	81.21	-18.19	peak	
10		5934.840	23.26	38.79	62.05	68.20	-6.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/8
Test Frequency	5825MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

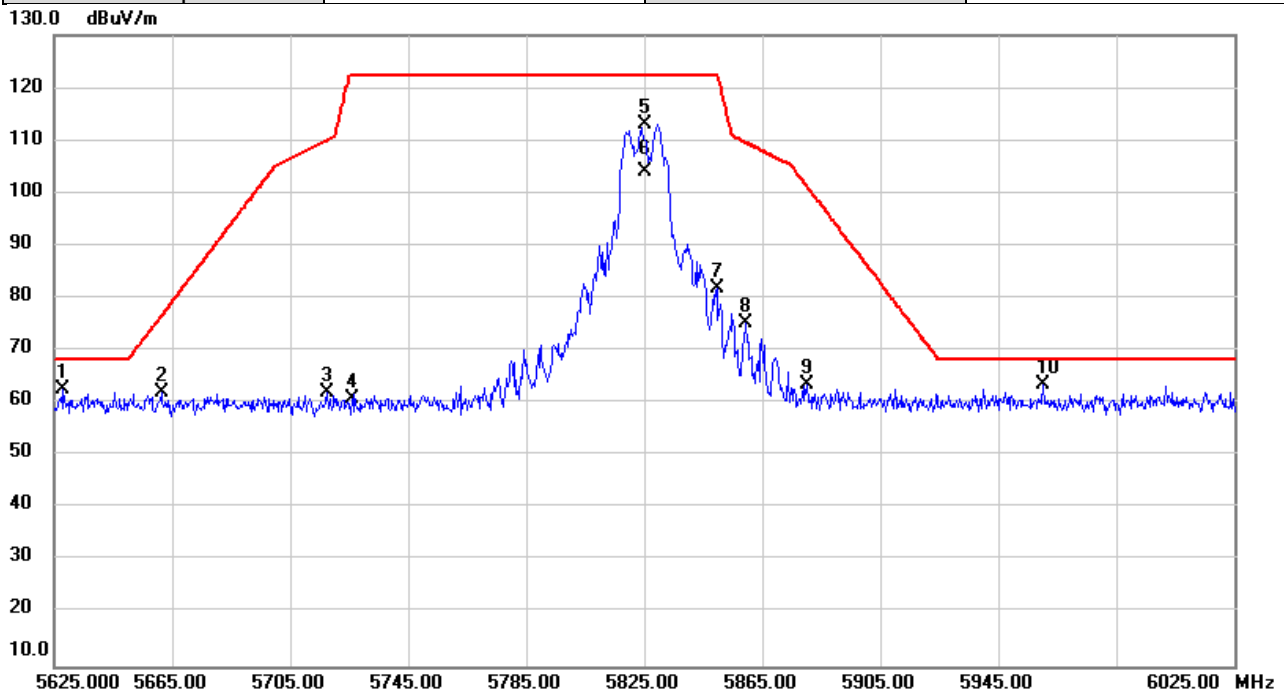


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5628.147	24.70	38.10	62.80	68.20	-5.40	peak	
2		5661.360	23.89	38.18	62.07	76.64	-14.57	peak	
3		5717.387	23.66	38.29	61.95	110.07	-48.12	peak	
4		5725.947	22.66	38.32	60.98	122.20	-61.22	peak	
5		5825.000	74.37	38.54	112.91	122.20	-9.29	peak	NoLimit
6		5825.000	65.41	38.54	103.95	122.20	-18.25	AVG	NoLimit
7		5849.600	43.27	38.59	81.86	122.20	-40.34	peak	
8		5859.573	36.76	38.61	75.37	109.52	-34.15	peak	
9		5880.200	24.85	38.66	63.51	101.34	-37.83	peak	
10	*	5960.400	24.60	38.84	63.44	68.20	-4.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/8
Test Frequency	5180MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

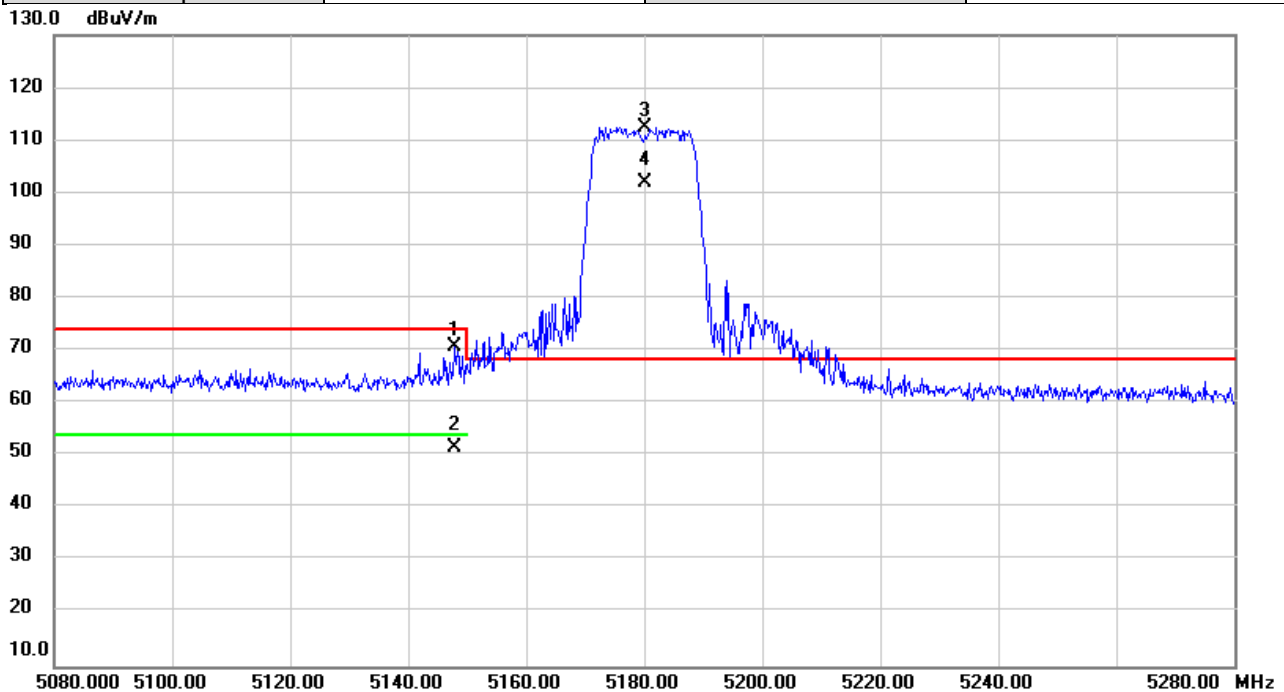


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5147.800	33.29	37.34	70.63	74.00	-3.37	peak	
2		5147.800	14.17	37.34	51.51	54.00	-2.49	AVG	
3	*	5180.000	75.18	37.38	112.56	68.20	44.36	peak	NoLimit
4	X	5180.000	64.54	37.38	101.92	68.20	33.72	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/8
Test Frequency	5240MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

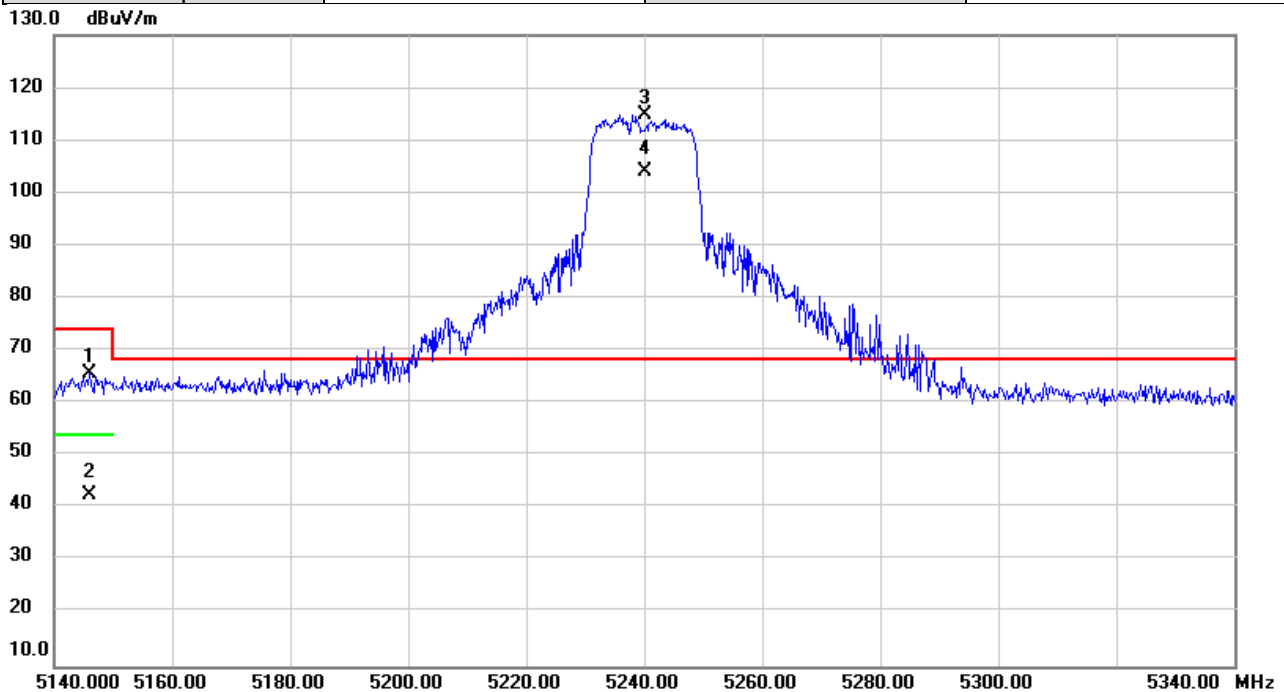


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5145.987	28.29	37.34	65.63	74.00	-8.37	peak	
2		5145.987	5.20	37.34	42.54	54.00	-11.46	AVG	
3	*	5240.000	77.27	37.46	114.73	68.20	46.53	peak	NoLimit
4	X	5240.000	66.44	37.46	103.90	68.20	35.70	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/8
Test Frequency	5260MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

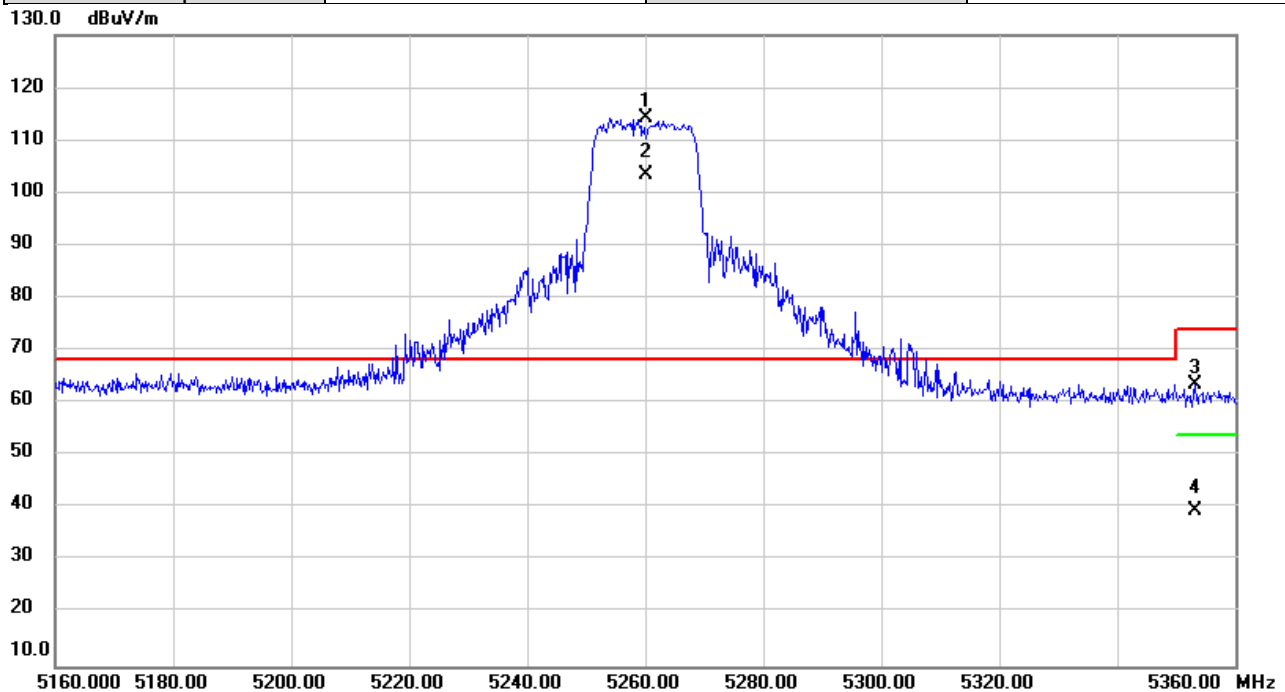


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5260.000	76.74	37.49	114.23	68.20	46.03	peak	NoLimit
2	X	5260.000	66.06	37.49	103.55	68.20	35.35	AVG	NoLimit
3		5353.193	25.81	37.61	63.42	74.00	-10.58	peak	
4		5353.193	1.82	37.61	39.43	54.00	-14.57	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/8
Test Frequency	5320MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

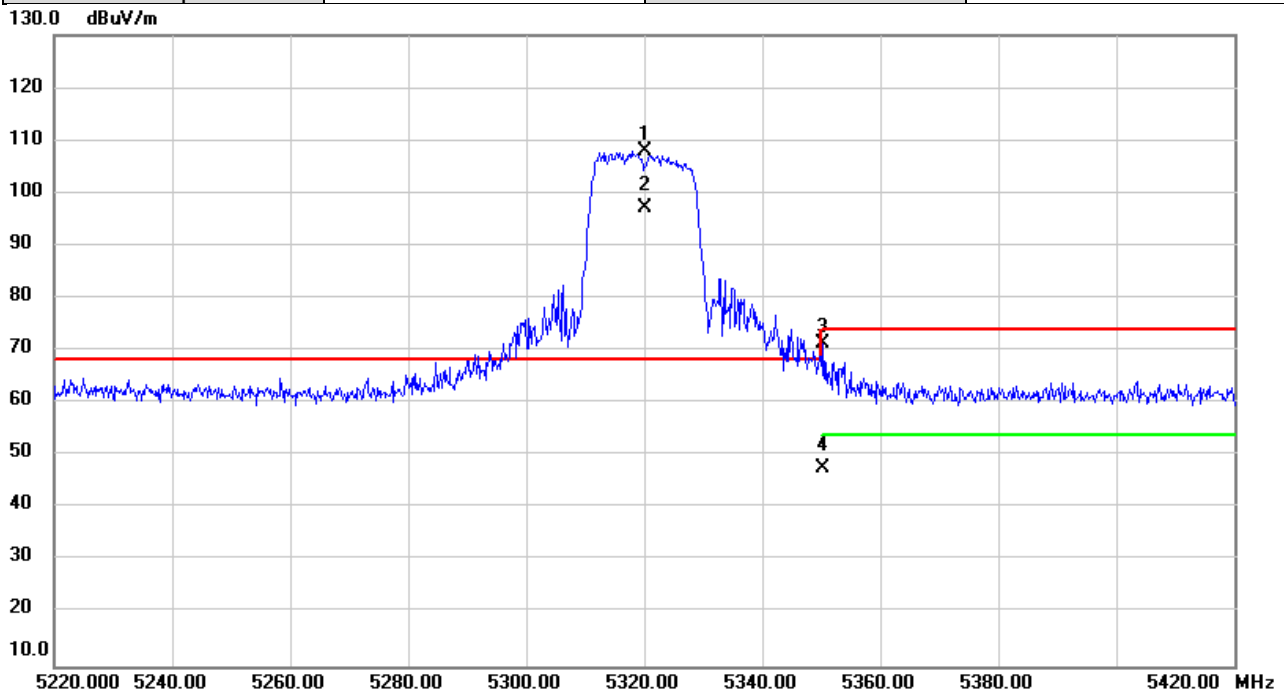


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	70.37	37.57	107.94	68.20	39.74	peak	NoLimit
2	X	5320.000	59.61	37.57	97.18	68.20	28.98	AVG	NoLimit
3		5350.233	33.77	37.61	71.38	74.00	-2.62	peak	
4		5350.233	9.97	37.61	47.58	54.00	-6.42	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/8
Test Frequency	5500MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

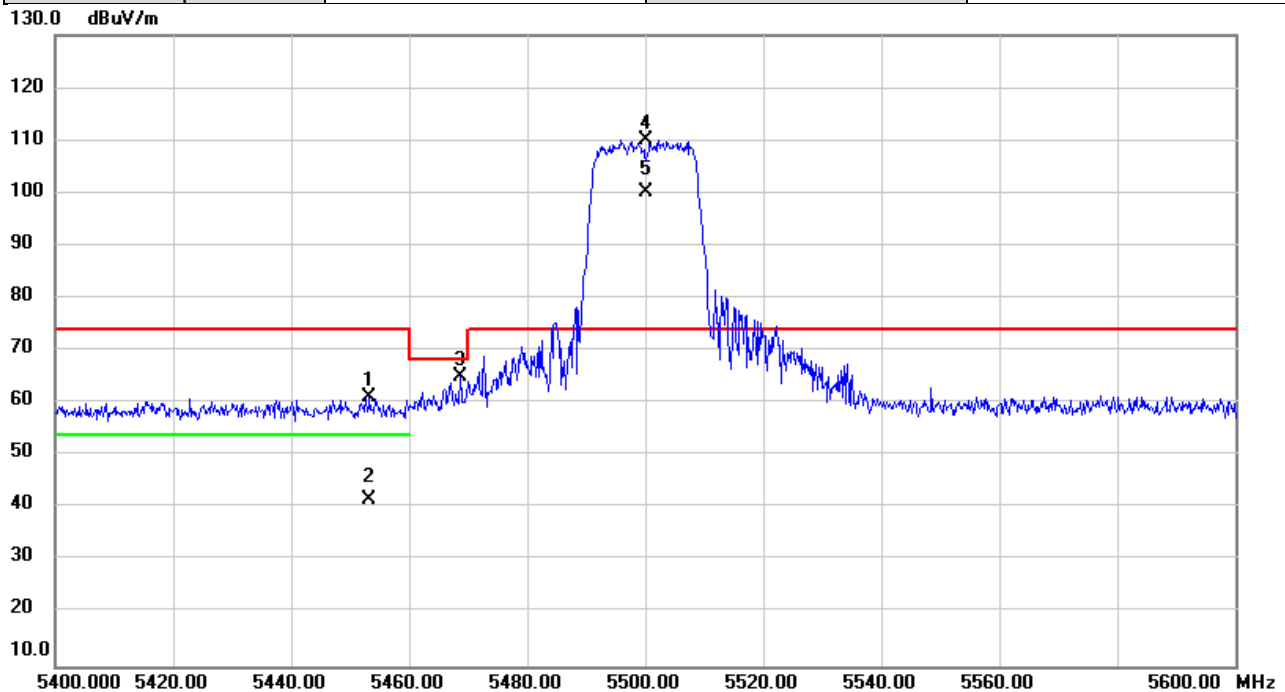


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5453.253	23.50	37.74	61.24	74.00	-12.76	peak	
2		5453.253	3.98	37.74	41.72	54.00	-12.28	AVG	
3		5468.627	27.37	37.76	65.13	68.20	-3.07	peak	
4	*	5500.000	72.16	37.81	109.97	74.00	35.97	peak	NoLimit
5	X	5500.000	62.37	37.81	100.18	74.00	26.18	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/8
Test Frequency	5700MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

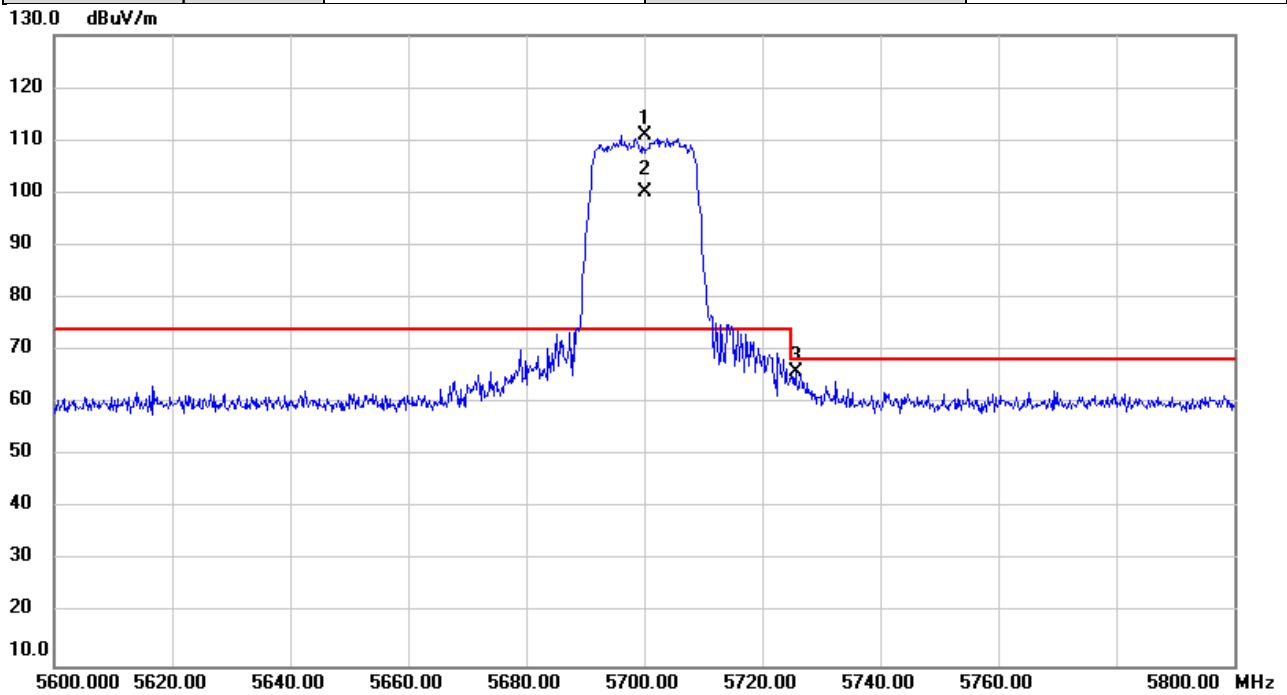


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5700.000	72.59	38.26	110.85	74.00	36.85	peak	NoLimit
2	X	5700.000	61.93	38.26	100.19	74.00	26.19	AVG	NoLimit
3		5725.747	27.63	38.32	65.95	68.20	-2.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/8
Test Frequency	5745MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

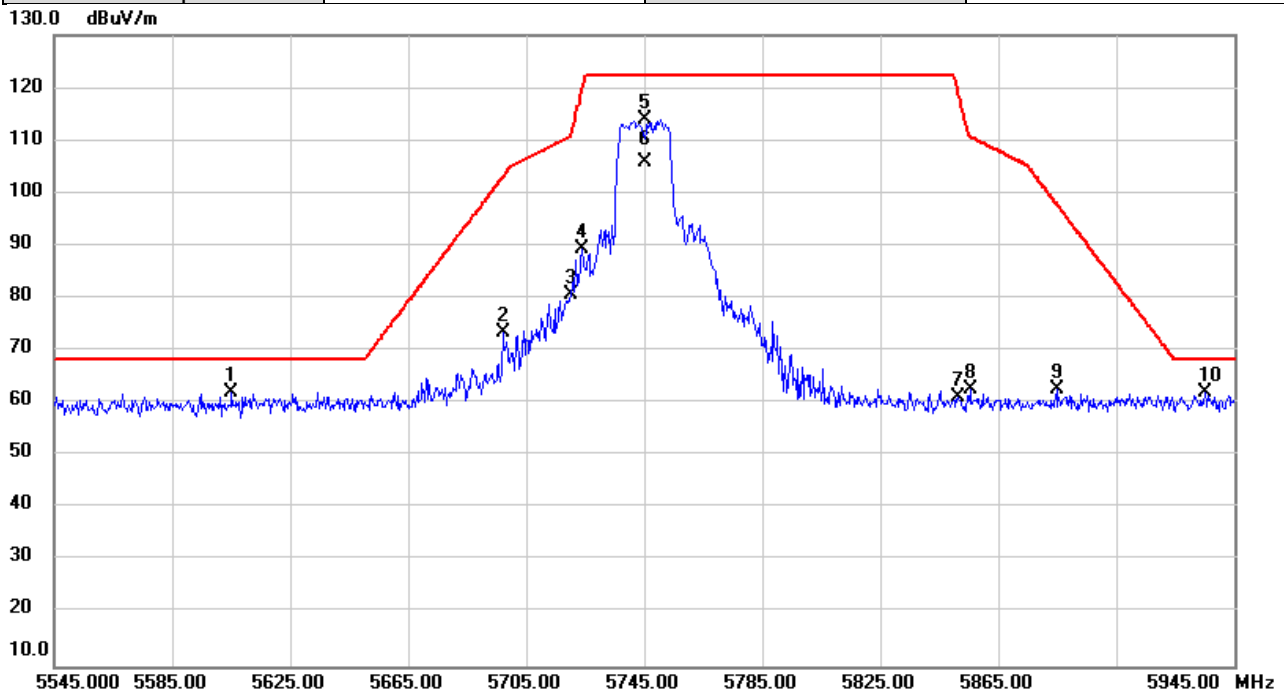


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5605.213	24.04	38.05	62.09	68.20	-6.11	peak	
2		5697.307	35.25	38.26	73.51	103.22	-29.71	peak	
3		5719.960	42.38	38.30	80.68	110.79	-30.11	peak	
4		5724.000	50.96	38.31	89.27	119.92	-30.65	peak	
5		5745.000	75.58	38.36	113.94	122.20	-8.26	peak	NoLimit
6		5745.000	67.56	38.36	105.92	122.20	-16.28	AVG	NoLimit
7		5851.387	22.42	38.60	61.02	119.04	-58.02	peak	
8		5855.747	23.91	38.61	62.52	110.59	-48.07	peak	
9		5884.773	23.92	38.67	62.59	97.94	-35.35	peak	
10	*	5935.200	23.32	38.79	62.11	68.20	-6.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/8
Test Frequency	5825MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

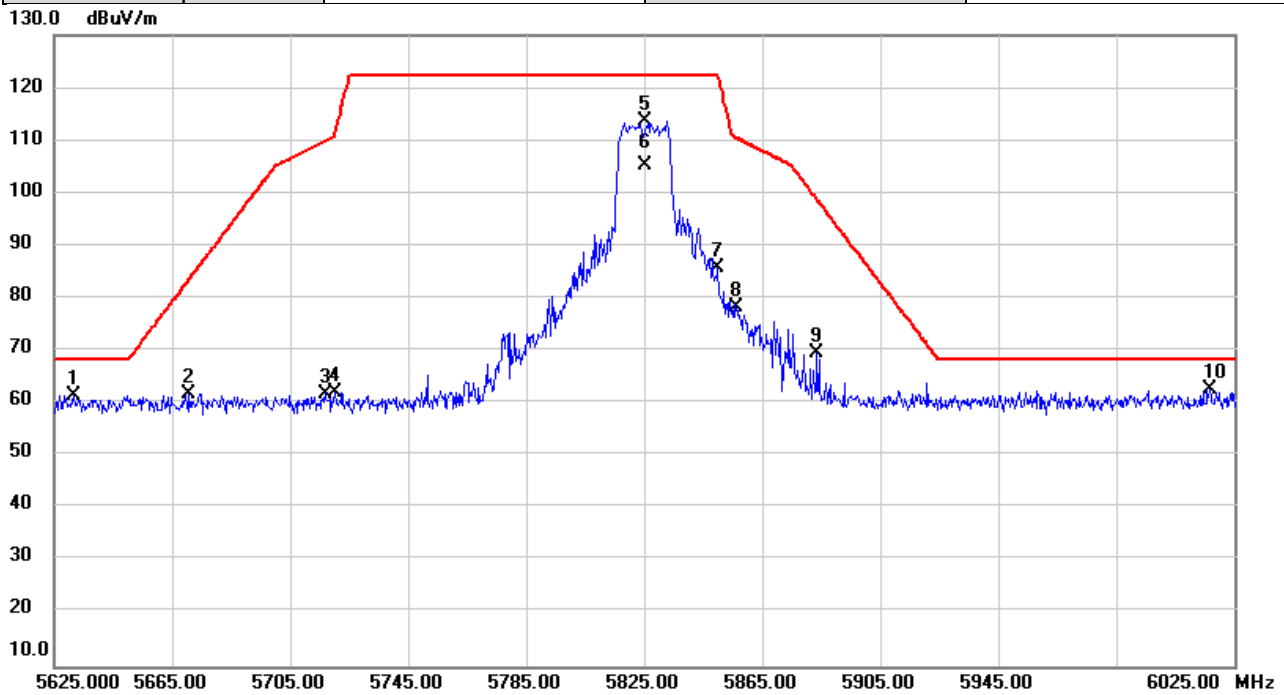


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5631.547	23.42	38.10	61.52	68.20	-6.68	peak	
2		5670.733	23.50	38.19	61.69	83.58	-21.89	peak	
3		5716.840	23.61	38.29	61.90	109.92	-48.02	peak	
4		5720.373	23.83	38.31	62.14	111.65	-49.51	peak	
5		5825.000	75.04	38.54	113.58	122.20	-8.62	peak	NoLimit
6		5825.000	66.71	38.54	105.25	122.20	-16.95	AVG	NoLimit
7		5849.827	47.06	38.59	85.65	122.20	-36.55	peak	
8		5856.280	39.74	38.61	78.35	110.44	-32.09	peak	
9		5883.533	30.76	38.67	69.43	98.86	-29.43	peak	
10	*	6016.747	23.76	39.00	62.76	68.20	-5.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/8
Test Frequency	5190MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

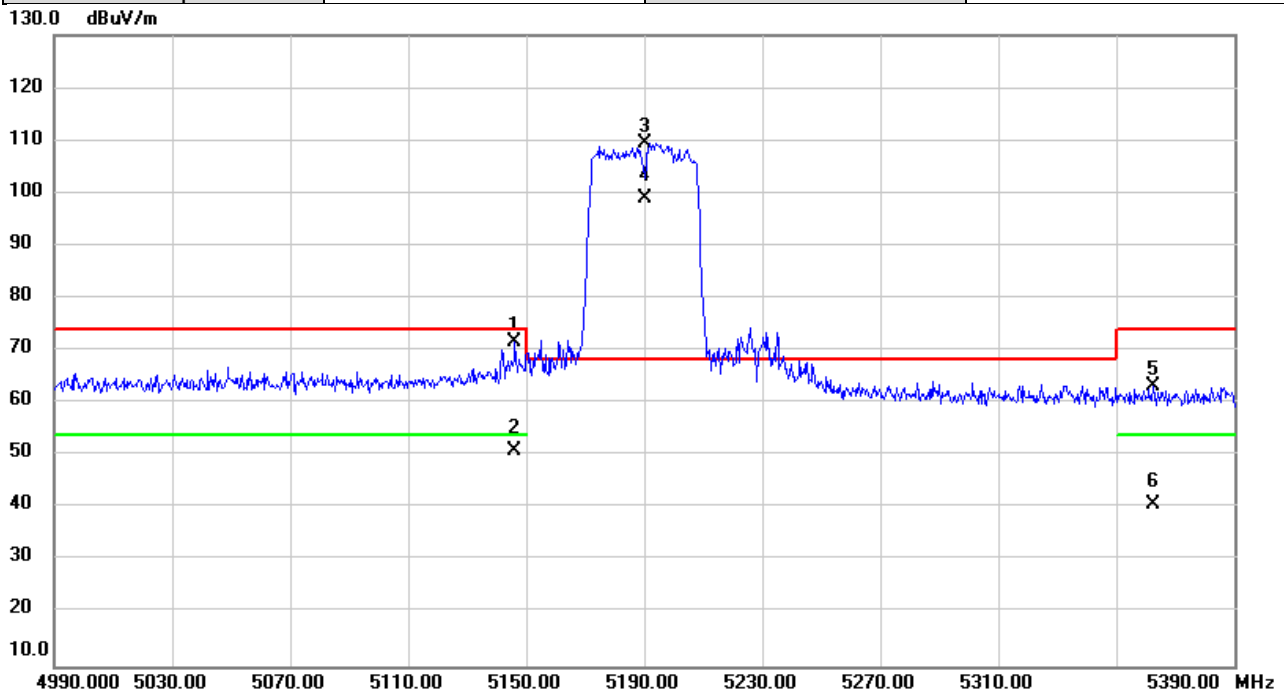


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5146.200	34.17	37.34	71.51	74.00	-2.49	peak	
2		5146.200	13.49	37.34	50.83	54.00	-3.17	AVG	
3	*	5190.000	71.99	37.39	109.38	68.20	41.18	peak	NoLimit
4	X	5190.000	61.63	37.39	99.02	68.20	30.82	AVG	NoLimit
5		5362.427	25.48	37.63	63.11	74.00	-10.89	peak	
6		5362.427	3.00	37.63	40.63	54.00	-13.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/8
Test Frequency	5230MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

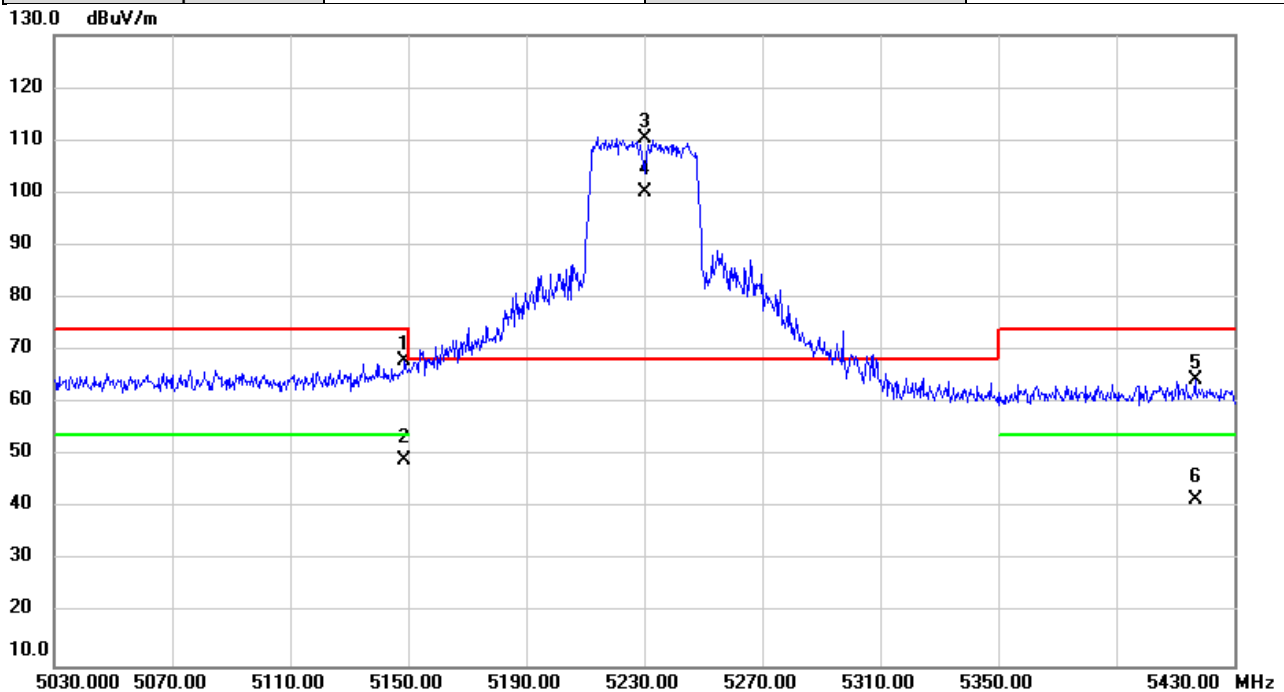


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.867	30.77	37.34	68.11	74.00	-5.89	peak	
2		5148.867	11.79	37.34	49.13	54.00	-4.87	AVG	
3	*	5230.000	73.06	37.44	110.50	68.20	42.30	peak	NoLimit
4	X	5230.000	62.72	37.44	100.16	68.20	31.96	AVG	NoLimit
5		5416.707	26.65	37.70	64.35	74.00	-9.65	peak	
6		5416.707	3.93	37.70	41.63	54.00	-12.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/8
Test Frequency	5270MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

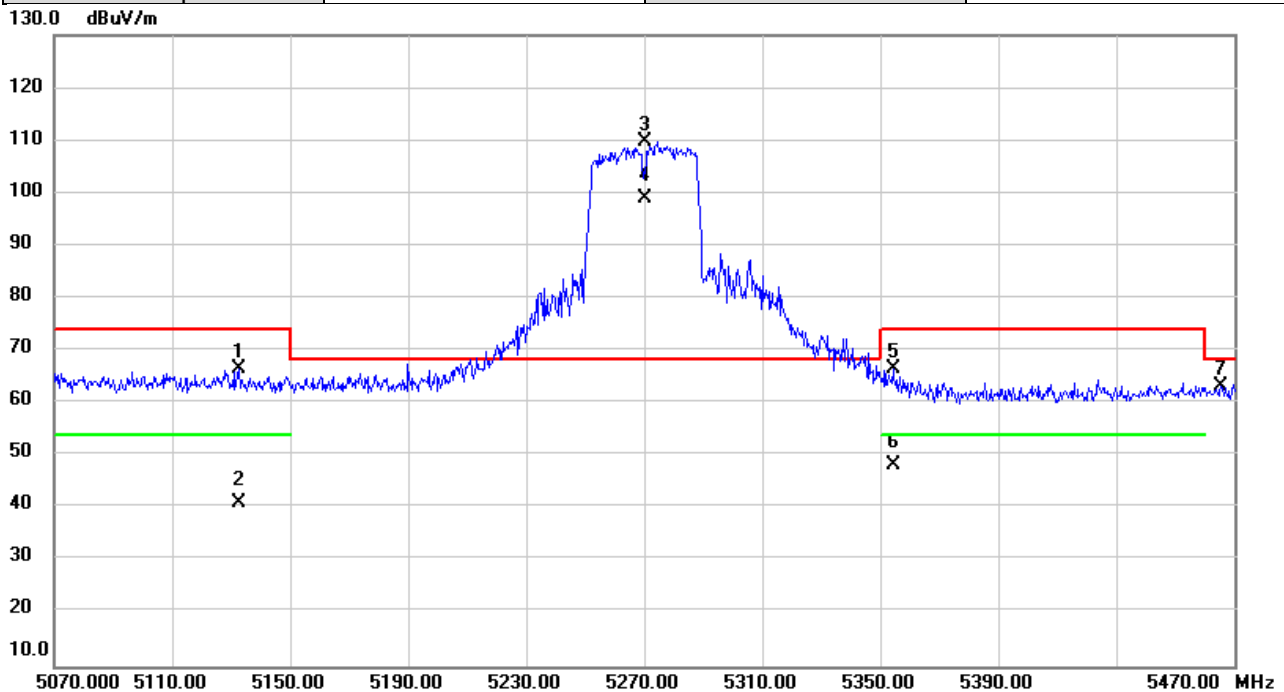


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5132.733	29.20	37.32	66.52	74.00	-7.48	peak	
2		5132.733	3.61	37.32	40.93	54.00	-13.07	AVG	
3	*	5270.000	72.24	37.51	109.75	68.20	41.55	peak	NoLimit
4	X	5270.000	61.34	37.51	98.85	68.20	30.65	AVG	NoLimit
5		5354.347	28.96	37.61	66.57	74.00	-7.43	peak	
6		5354.347	10.53	37.61	48.14	54.00	-5.86	AVG	
7		5465.253	25.37	37.76	63.13	68.20	-5.07	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/8
Test Frequency	5310MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

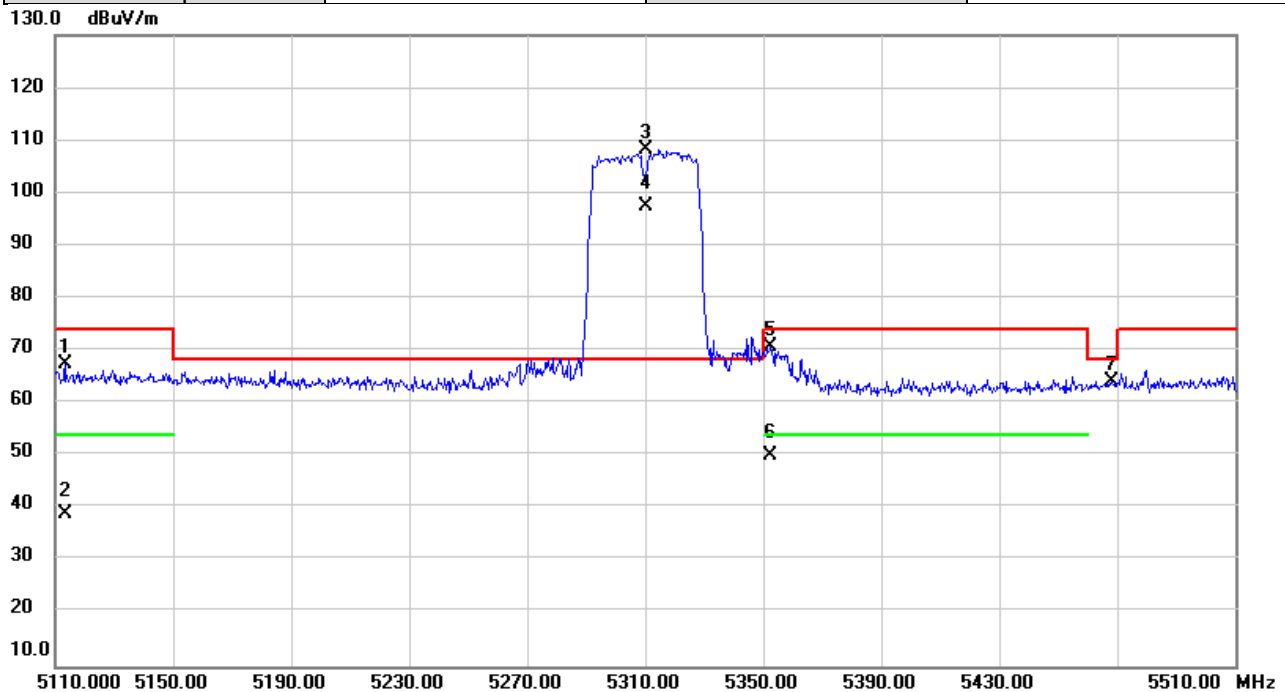


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5113.533	30.13	37.29	67.42	74.00	-6.58	peak	
2		5113.533	1.78	37.29	39.07	54.00	-14.93	AVG	
3	*	5310.000	70.69	37.56	108.25	68.20	40.05	peak	NoLimit
4	X	5310.000	59.91	37.56	97.47	68.20	29.27	AVG	NoLimit
5		5352.520	33.19	37.61	70.80	74.00	-3.20	peak	
6		5352.520	12.47	37.61	50.08	54.00	-3.92	AVG	
7		5468.120	26.47	37.76	64.23	68.20	-3.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/8
Test Frequency	5510MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

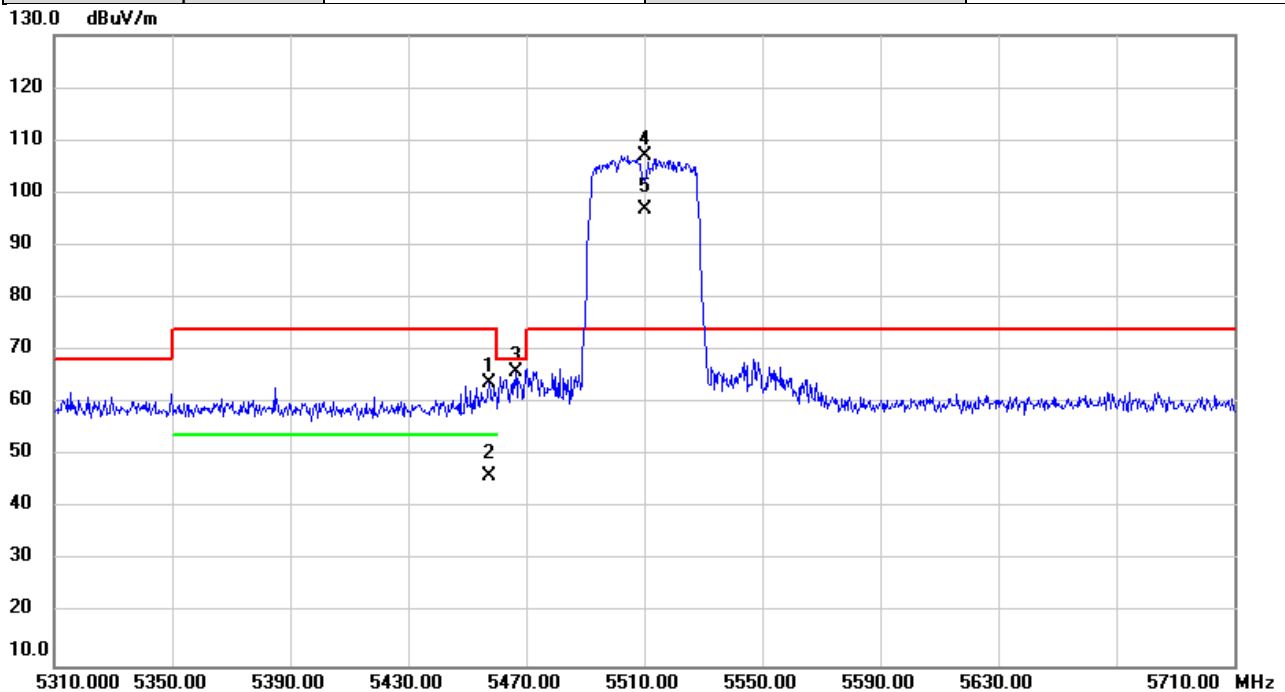


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5457.400	25.97	37.76	63.73	74.00	-10.27	peak	
2		5457.400	8.37	37.76	46.13	54.00	-7.87	AVG	
3		5466.480	28.27	37.76	66.03	68.20	-2.17	peak	
4	*	5510.000	69.09	37.83	106.92	74.00	32.92	peak	NoLimit
5	X	5510.000	59.13	37.83	96.96	74.00	22.96	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/8
Test Frequency	5670MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

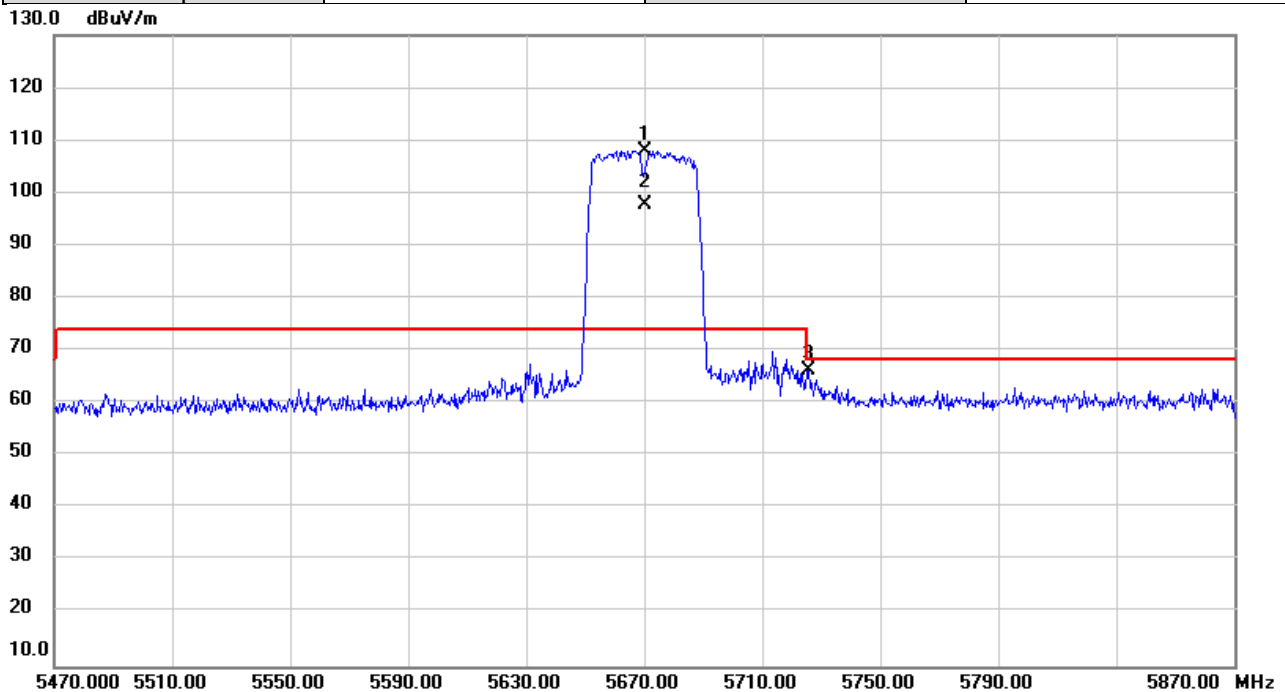


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5670.000	69.88	38.19	108.07	74.00	34.07	peak	NoLimit
2	X	5670.000	59.62	38.19	97.81	74.00	23.81	AVG	NoLimit
3		5725.613	27.82	38.32	66.14	68.20	-2.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/8
Test Frequency	5755MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

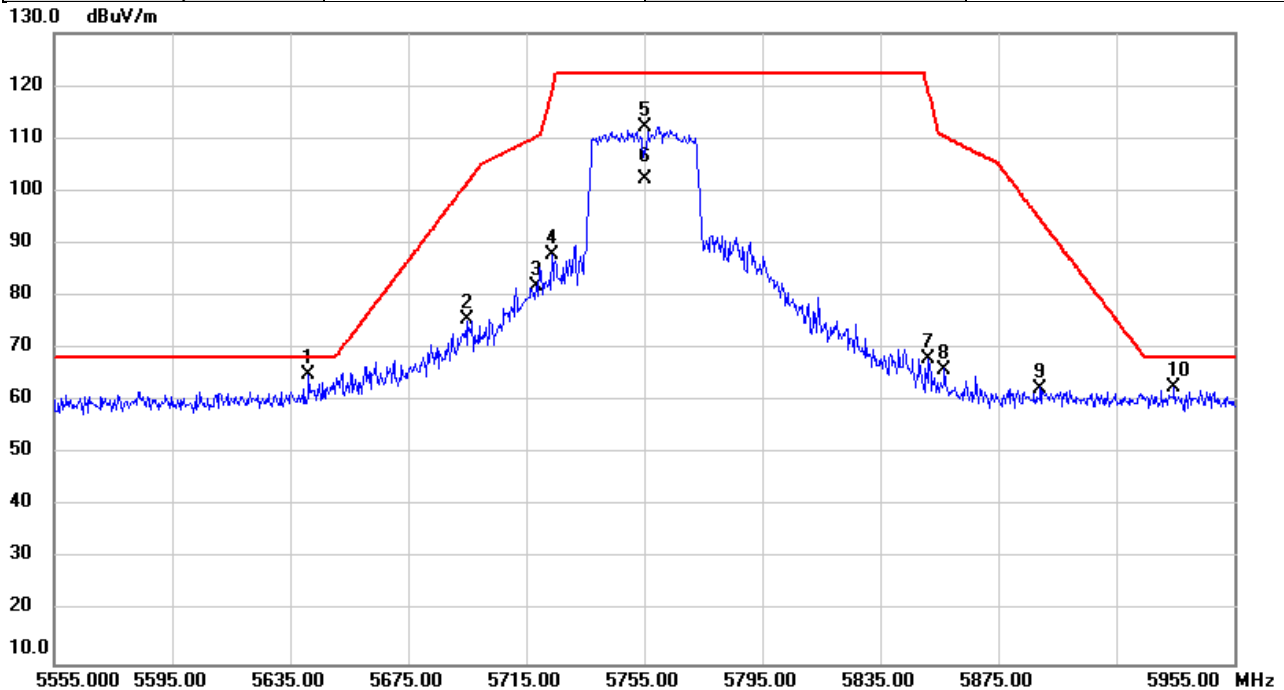


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5641.240	26.85	38.13	64.98	68.20	-3.22	peak	
2		5695.160	37.16	38.24	75.40	101.63	-26.23	peak	
3		5718.307	43.43	38.30	81.73	110.33	-28.60	peak	
4		5723.680	49.61	38.31	87.92	119.19	-31.27	peak	
5		5755.000	73.85	38.38	112.23	122.20	-9.97	peak	NoLimit
6		5755.000	63.80	38.38	102.18	122.20	-20.02	AVG	NoLimit
7		5851.467	29.43	38.60	68.03	118.85	-50.82	peak	
8		5856.693	27.49	38.61	66.10	110.33	-44.23	peak	
9		5889.053	23.82	38.68	62.50	94.77	-32.27	peak	
10		5934.693	23.74	38.79	62.53	68.20	-5.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/8
Test Frequency	5795MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

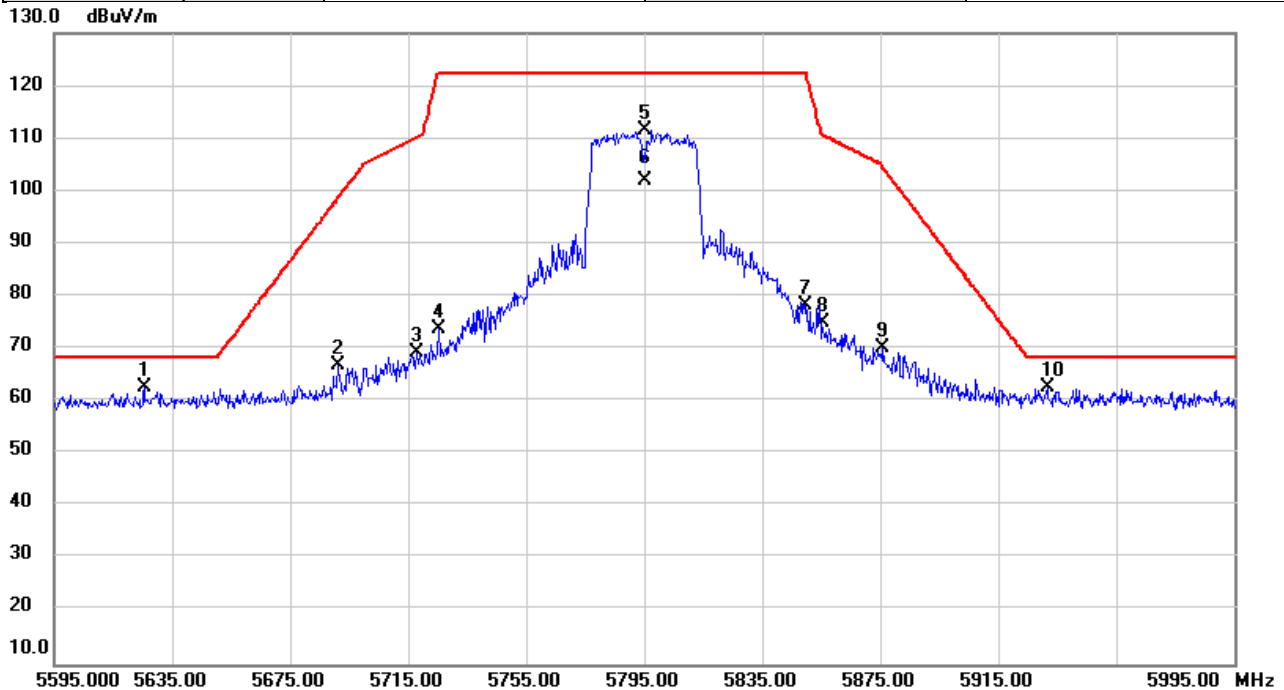


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5625.427	24.69	38.10	62.79	68.20	-5.41	peak	
2		5691.360	28.69	38.24	66.93	98.83	-31.90	peak	
3		5717.987	30.99	38.30	69.29	110.24	-40.95	peak	
4		5725.187	35.40	38.32	73.72	122.20	-48.48	peak	
5		5795.000	73.12	38.47	111.59	122.20	-10.61	peak	NoLimit
6		5795.000	63.47	38.47	101.94	122.20	-20.26	AVG	NoLimit
7		5849.560	39.56	38.59	78.15	122.20	-44.05	peak	
8		5855.267	36.34	38.61	74.95	110.73	-35.78	peak	
9		5876.013	31.49	38.66	70.15	104.45	-34.30	peak	
10		5931.693	23.98	38.77	62.75	68.20	-5.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5210MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

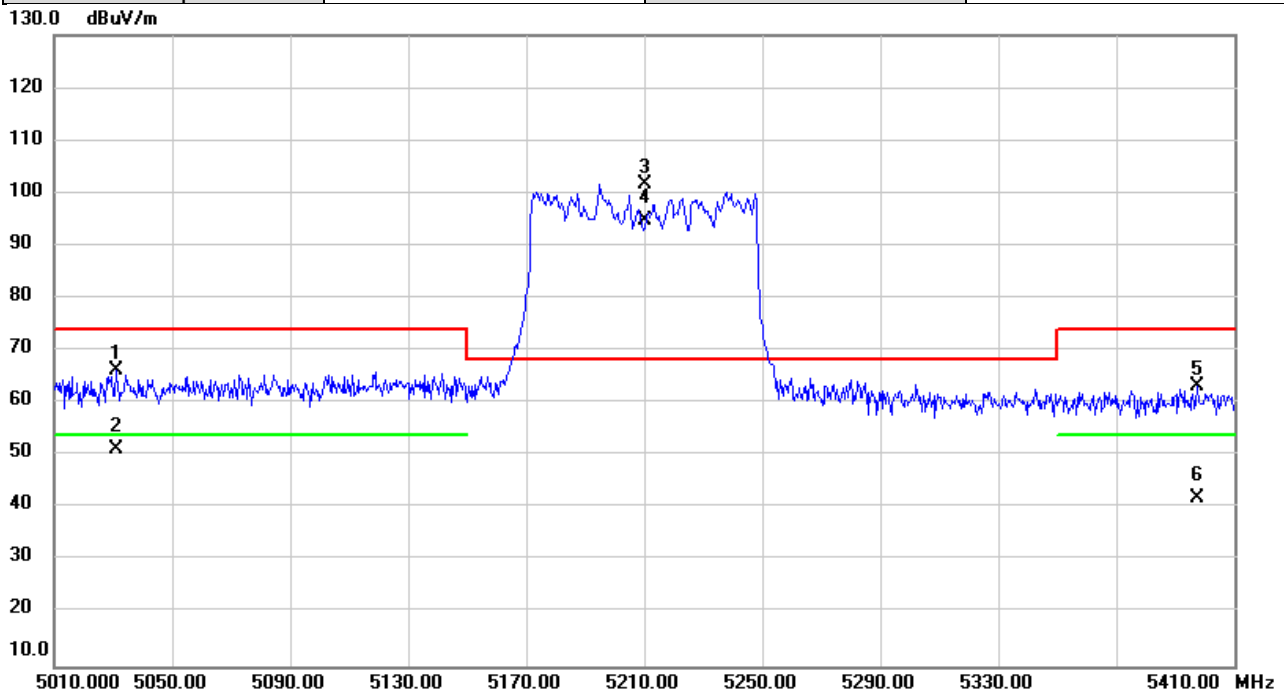


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5030.907	29.09	37.18	66.27	74.00	-7.73	peak	
2		5030.907	14.20	37.18	51.38	54.00	-2.62	AVG	
3	*	5210.000	64.11	37.42	101.53	68.20	33.33	peak	NoLimit
4	X	5210.000	57.35	37.42	94.77	68.20	26.57	AVG	NoLimit
5		5397.573	25.58	37.67	63.25	74.00	-10.75	peak	
6		5397.573	4.31	37.67	41.98	54.00	-12.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5290MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

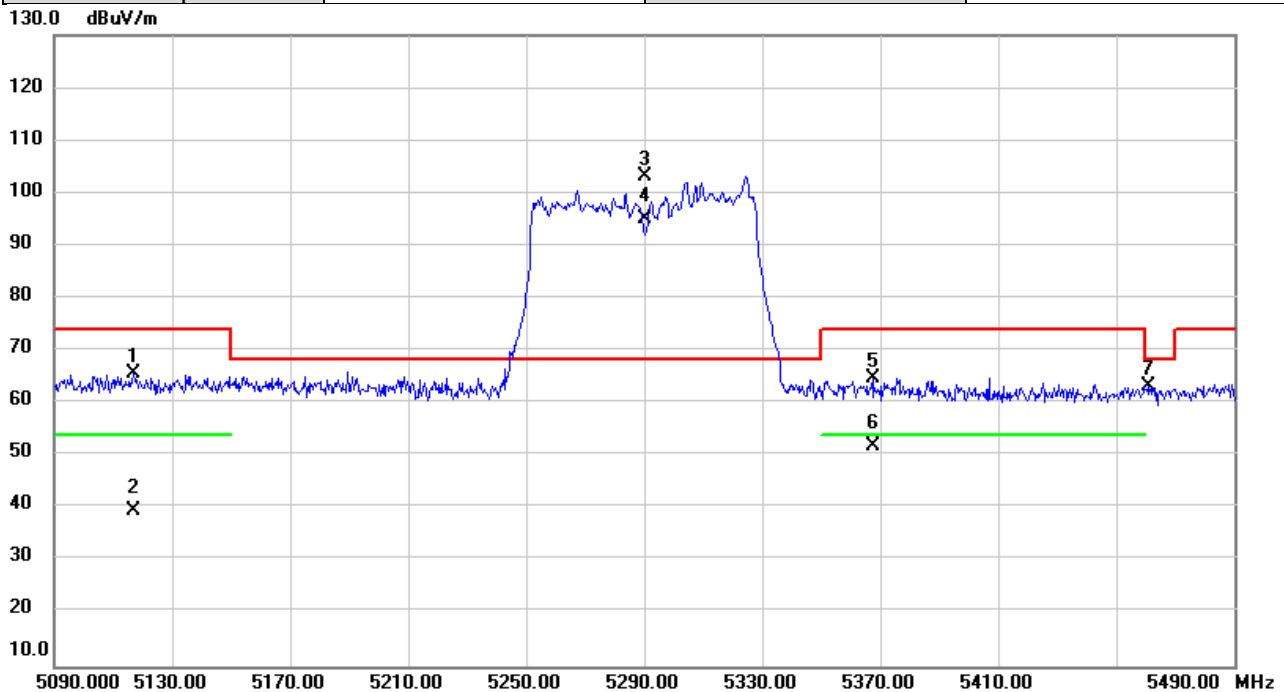


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5117.133	28.37	37.29	65.66	74.00	-8.34	peak	
2		5117.133	2.28	37.29	39.57	54.00	-14.43	AVG	
3	*	5290.000	65.63	37.53	103.16	68.20	34.96	peak	NoLimit
4	X	5290.000	57.39	37.53	94.92	68.20	26.72	AVG	NoLimit
5		5367.373	27.21	37.63	64.84	74.00	-9.16	peak	
6		5367.373	14.14	37.63	51.77	54.00	-2.23	AVG	
7		5461.187	25.36	37.76	63.12	68.20	-5.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5530MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

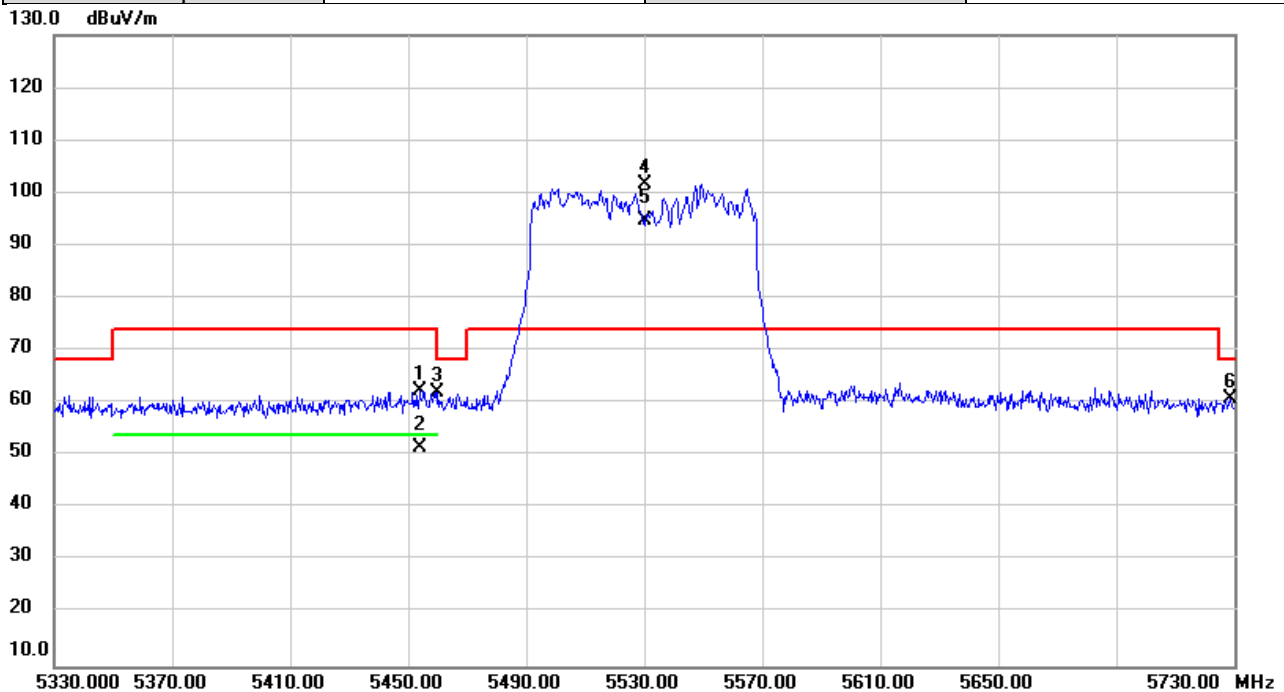


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5453.907	24.65	37.75	62.40	74.00	-11.60	peak	
2		5453.907	13.71	37.75	51.46	54.00	-2.54	AVG	
3		5460.120	24.43	37.76	62.19	68.20	-6.01	peak	
4	*	5530.000	63.89	37.88	101.77	74.00	27.77	peak	NoLimit
5	X	5530.000	56.78	37.88	94.66	74.00	20.66	AVG	NoLimit
6		5728.747	22.53	38.32	60.85	68.20	-7.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5610MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

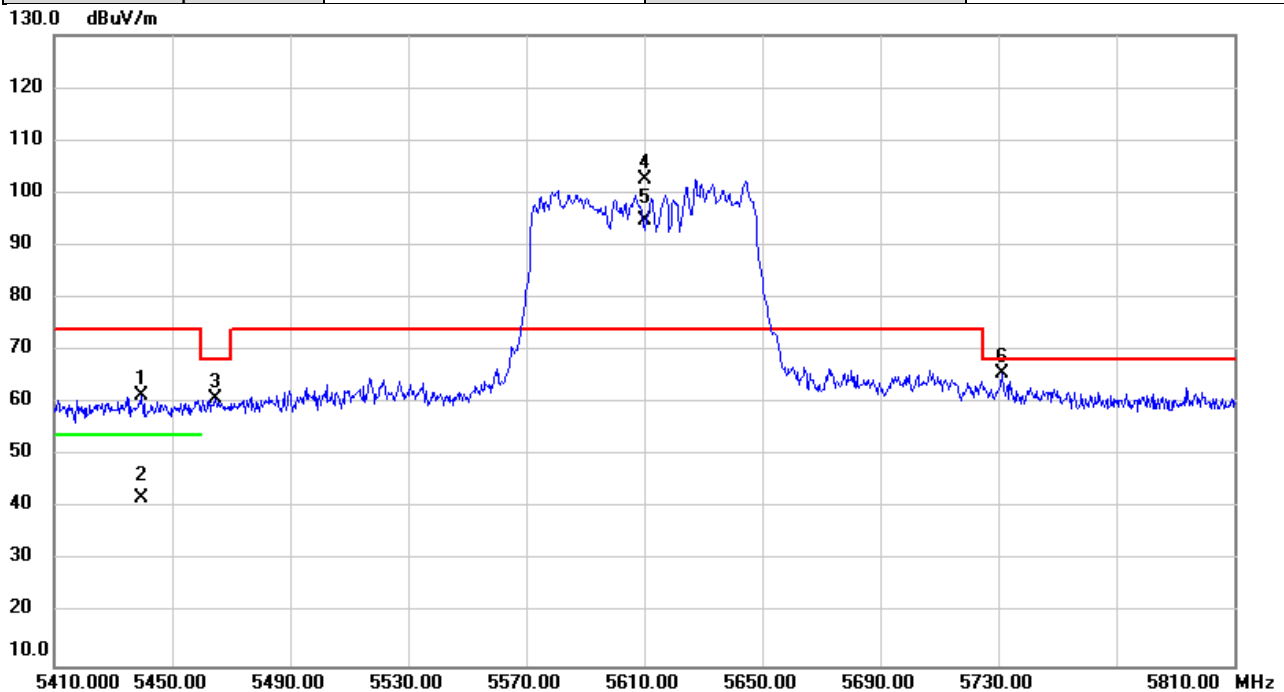


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5439.600	23.61	37.73	61.34	74.00	-12.66	peak	
2		5439.600	4.23	37.73	41.96	54.00	-12.04	AVG	
3		5464.493	22.97	37.76	60.73	68.20	-7.47	peak	
4	*	5610.000	64.46	38.05	102.51	74.00	28.51	peak	NoLimit
5	X	5610.000	56.83	38.05	94.88	74.00	20.88	AVG	NoLimit
6		5731.413	27.34	38.32	65.66	68.20	-2.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5775MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

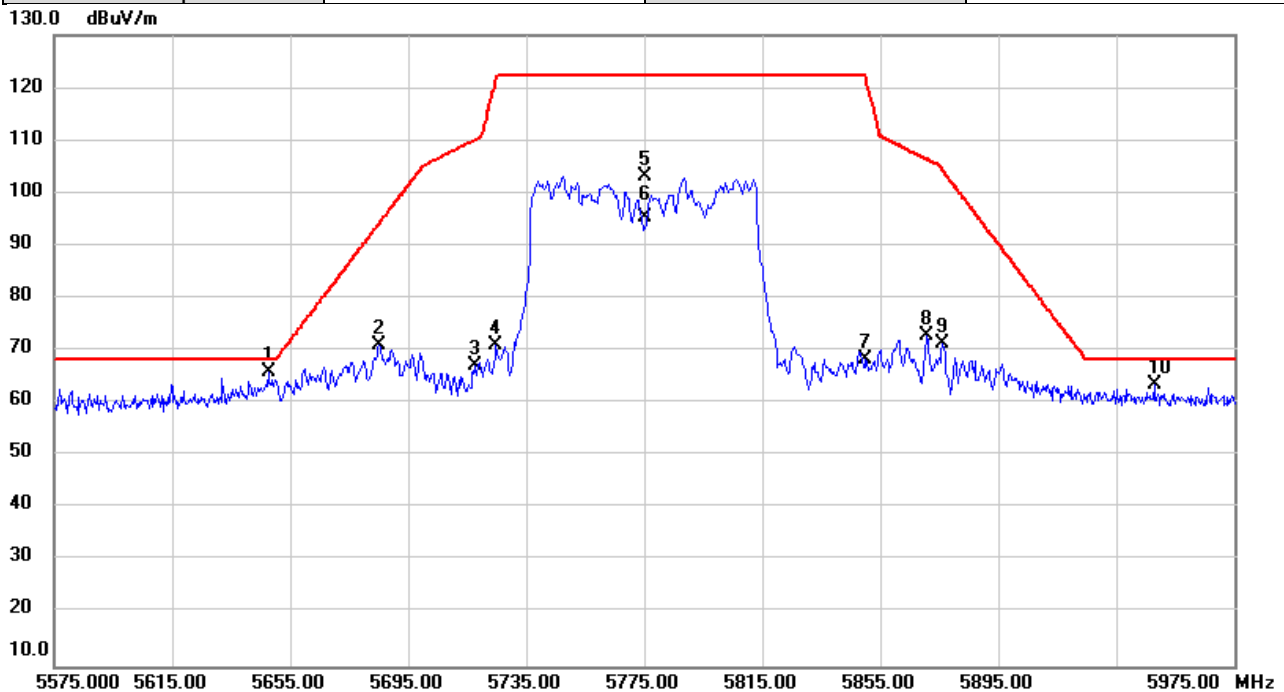


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5647.573	27.69	38.14	65.83	68.20	-2.37	peak	
2		5685.093	32.87	38.23	71.10	94.20	-23.10	peak	
3		5717.533	28.94	38.29	67.23	110.11	-42.88	peak	
4		5724.707	32.79	38.31	71.10	121.53	-50.43	peak	
5		5775.000	64.85	38.42	103.27	122.20	-18.93	peak	NoLimit
6		5775.000	56.84	38.42	95.26	122.20	-26.94	AVG	NoLimit
7		5850.053	29.66	38.59	68.25	122.08	-53.83	peak	
8		5870.600	34.15	38.64	72.79	106.43	-33.64	peak	
9		5876.280	32.56	38.66	71.22	104.25	-33.03	peak	
10		5948.133	24.82	38.82	63.64	68.20	-4.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/8
Test Frequency	5180MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

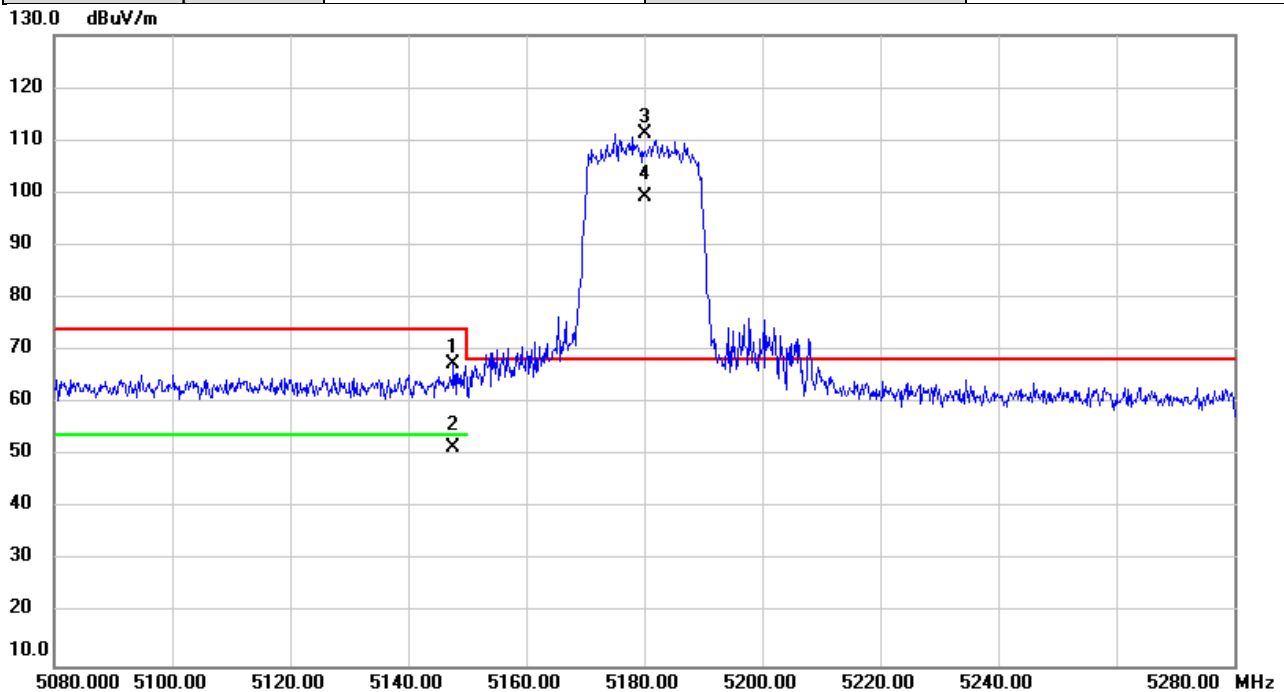


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5147.733	30.22	37.34	67.56	74.00	-6.44	peak	
2		5147.733	14.30	37.34	51.64	54.00	-2.36	AVG	
3	*	5180.000	73.76	37.38	111.14	68.20	42.94	peak	NoLimit
4	X	5180.000	61.90	37.38	99.28	68.20	31.08	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/8
Test Frequency	5240MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

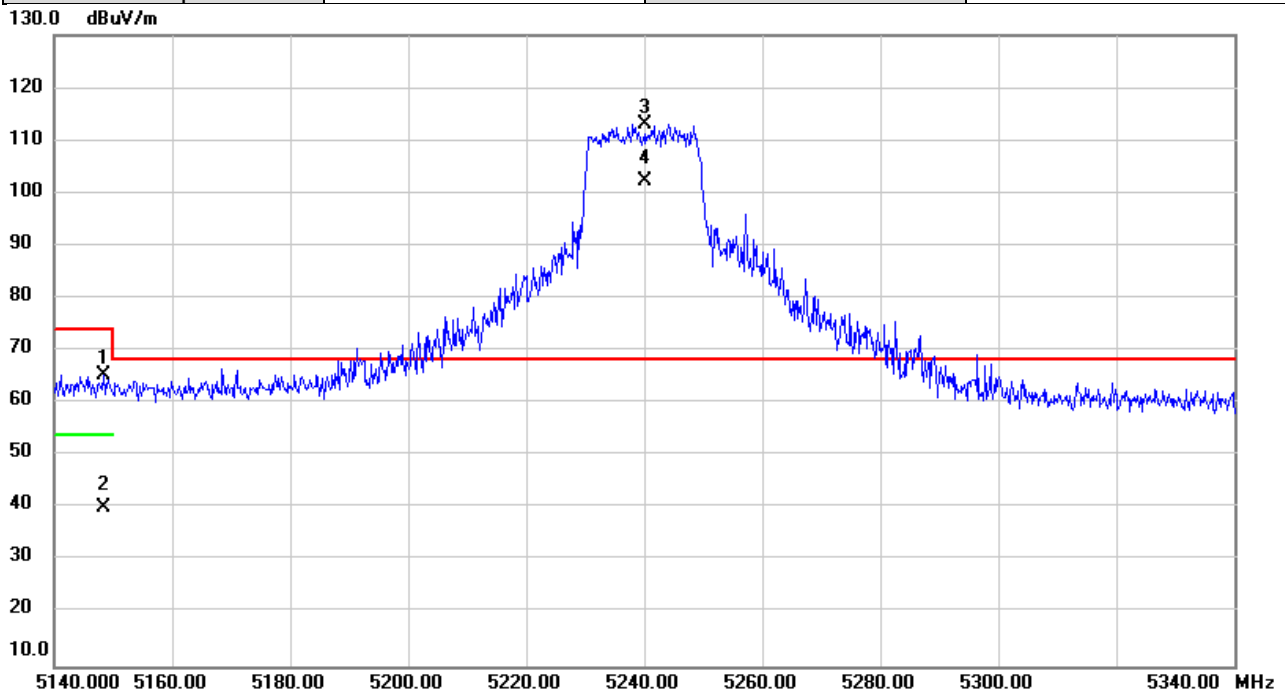


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.307	28.10	37.34	65.44	74.00	-8.56	peak	
2		5148.307	2.91	37.34	40.25	54.00	-13.75	AVG	
3	*	5240.000	75.65	37.46	113.11	68.20	44.91	peak	NoLimit
4	X	5240.000	64.85	37.46	102.31	68.20	34.11	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/8
Test Frequency	5260MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

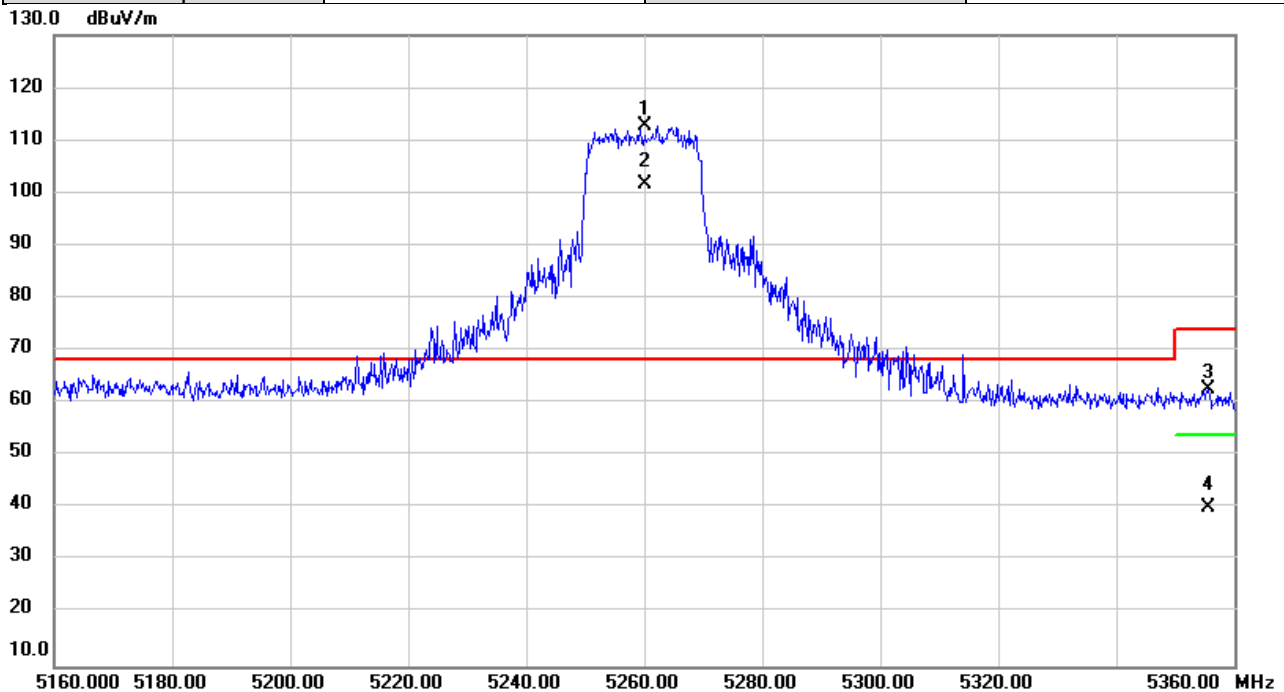


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5260.000	75.35	37.49	112.84	68.20	44.64	peak	NoLimit
2	X	5260.000	64.28	37.49	101.77	68.20	33.57	AVG	NoLimit
3		5355.500	25.10	37.61	62.71	74.00	-11.29	peak	
4		5355.500	2.58	37.61	40.19	54.00	-13.81	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/8
Test Frequency	5320MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

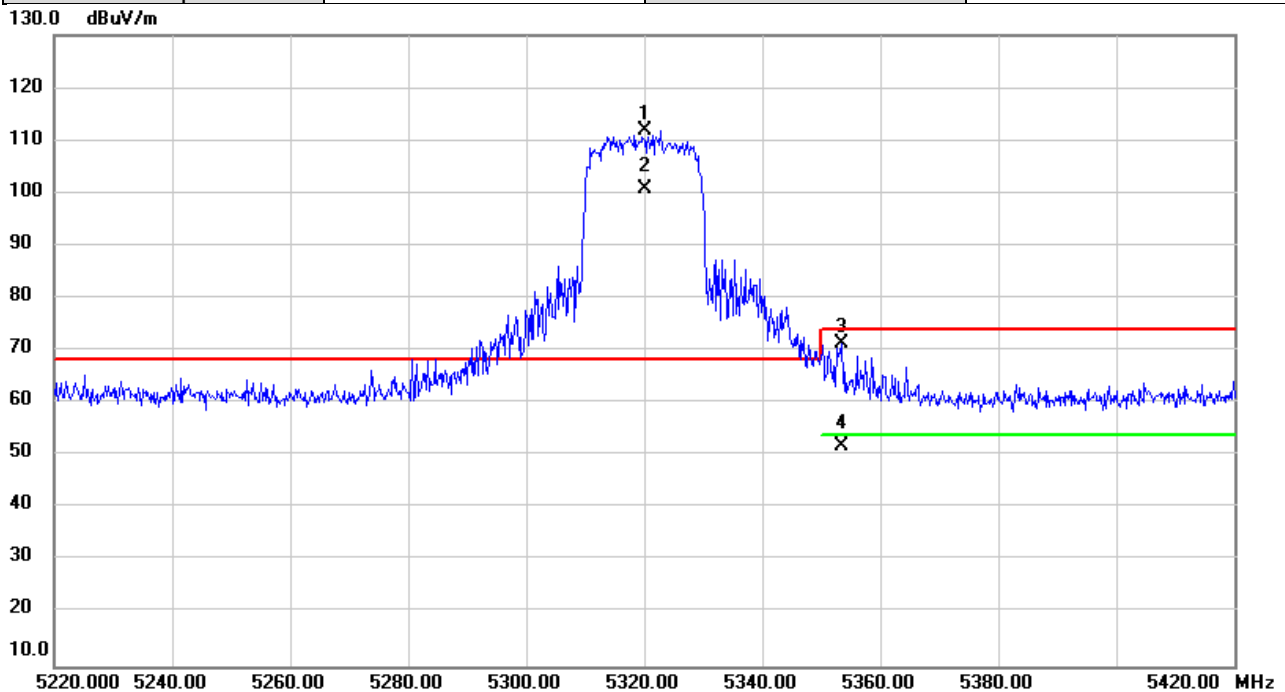


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	74.19	37.57	111.76	68.20	43.56	peak	NoLimit
2	X	5320.000	63.11	37.57	100.68	68.20	32.48	AVG	NoLimit
3		5353.393	33.73	37.61	71.34	74.00	-2.66	peak	
4		5353.393	14.12	37.61	51.73	54.00	-2.27	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/8
Test Frequency	5500MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

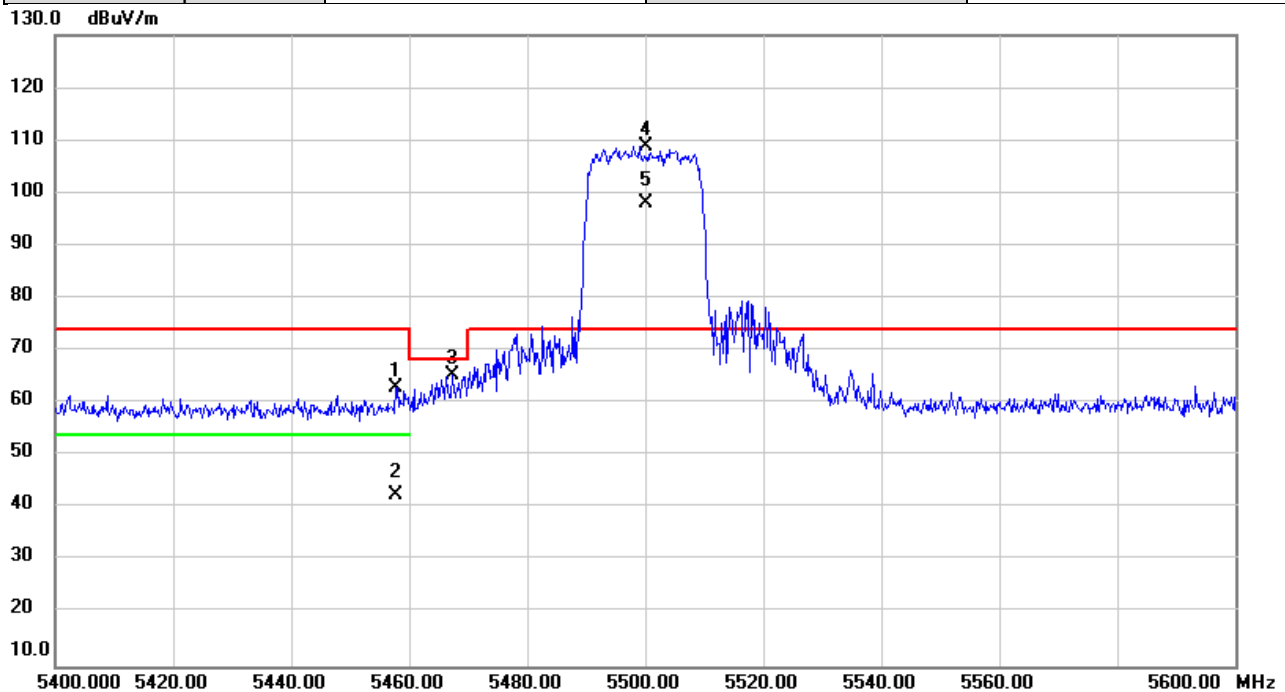


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5457.787	25.07	37.76	62.83	74.00	-11.17	peak	
2		5457.787	4.65	37.76	42.41	54.00	-11.59	AVG	
3		5467.393	27.55	37.76	65.31	68.20	-2.89	peak	
4	*	5500.000	71.03	37.81	108.84	74.00	34.84	peak	NoLimit
5	X	5500.000	60.25	37.81	98.06	74.00	24.06	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/8
Test Frequency	5700MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

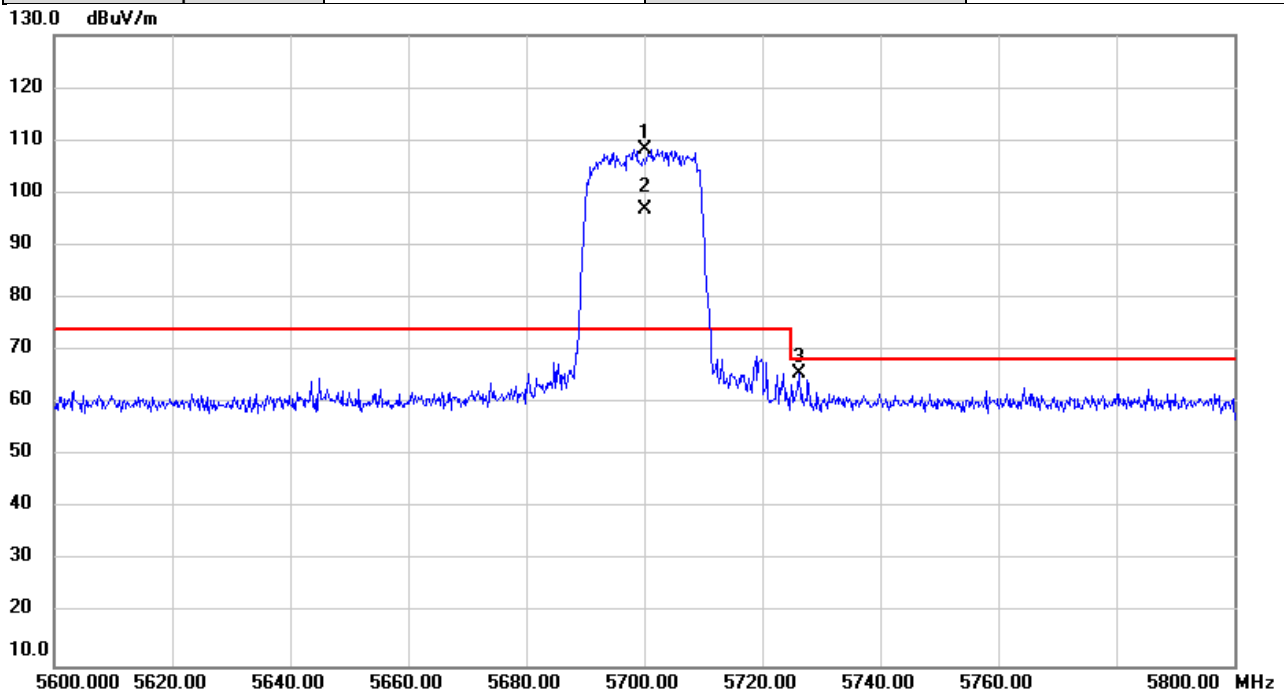


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	69.90	38.26	108.16	74.00	34.16	peak	NoLimit
2	X	5700.000	58.56	38.26	96.82	74.00	22.82	AVG	NoLimit
3		5726.200	27.20	38.32	65.52	68.20	-2.68	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/8
Test Frequency	5745MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

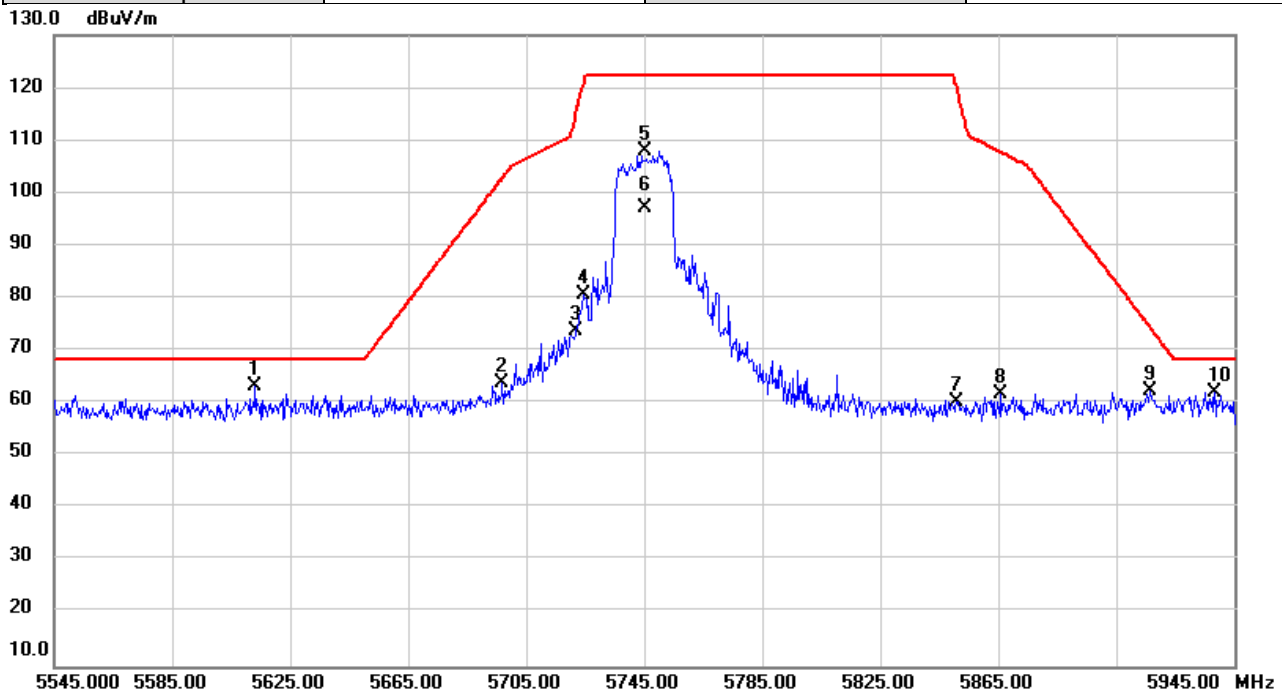


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5613.213	25.05	38.07	63.12	68.20	-5.08	peak	
2		5696.907	25.49	38.26	63.75	102.92	-39.17	peak	
3		5722.000	35.55	38.31	73.86	115.36	-41.50	peak	
4		5724.333	42.31	38.31	80.62	120.68	-40.06	peak	
5		5745.000	69.47	38.36	107.83	122.20	-14.37	peak	NoLimit
6		5745.000	58.75	38.36	97.11	122.20	-25.09	AVG	NoLimit
7		5850.747	21.66	38.59	60.25	120.50	-60.25	peak	
8		5865.880	23.01	38.63	61.64	107.75	-46.11	peak	
9		5916.267	23.72	38.74	62.46	74.64	-12.18	peak	
10		5938.440	23.29	38.79	62.08	68.20	-6.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/8
Test Frequency	5825MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

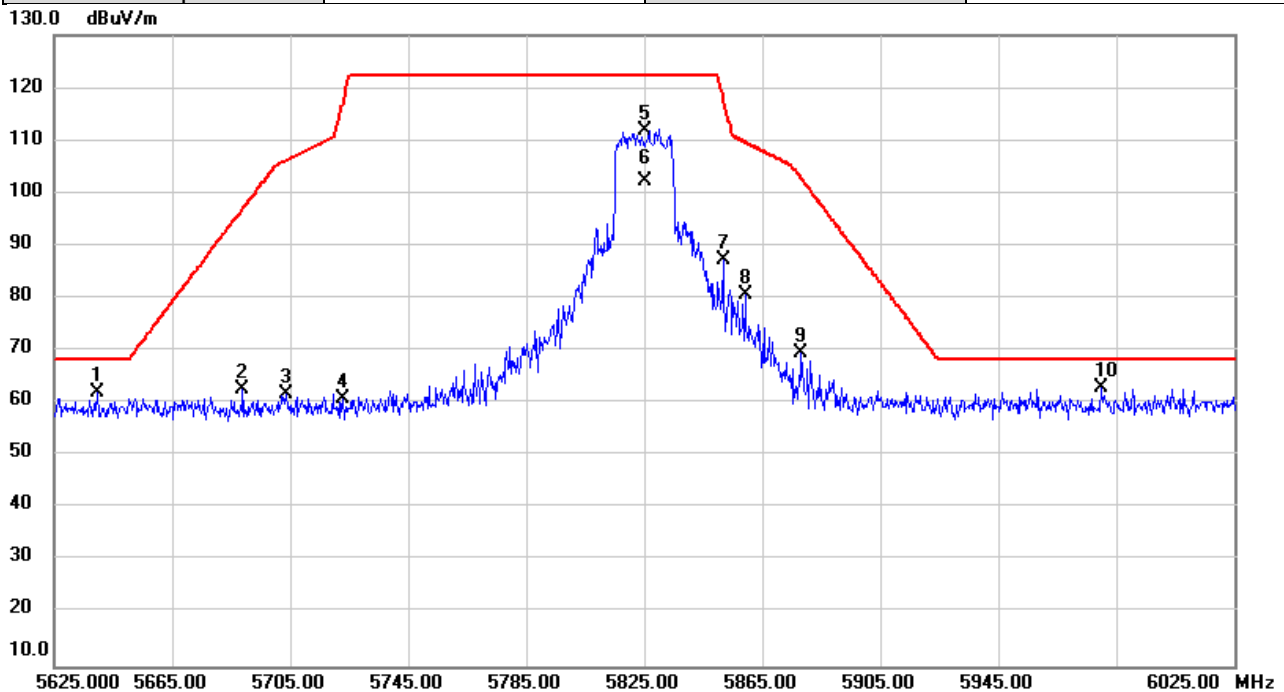


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5639.600	23.89	38.13	62.02	68.20	-6.18	peak	
2		5688.827	24.29	38.23	62.52	96.96	-34.44	peak	
3		5703.573	23.61	38.27	61.88	106.20	-44.32	peak	
4		5722.627	22.53	38.31	60.84	116.79	-55.95	peak	
5		5825.000	73.46	38.54	112.00	122.20	-10.20	peak	NoLimit
6		5825.000	63.83	38.54	102.37	122.20	-19.83	AVG	NoLimit
7		5851.800	48.77	38.60	87.37	118.09	-30.72	peak	
8		5859.227	42.04	38.61	80.65	109.61	-28.96	peak	
9		5878.293	30.85	38.66	69.51	102.75	-33.24	peak	
10	*	5980.160	23.94	38.88	62.82	68.20	-5.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/8
Test Frequency	5190MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

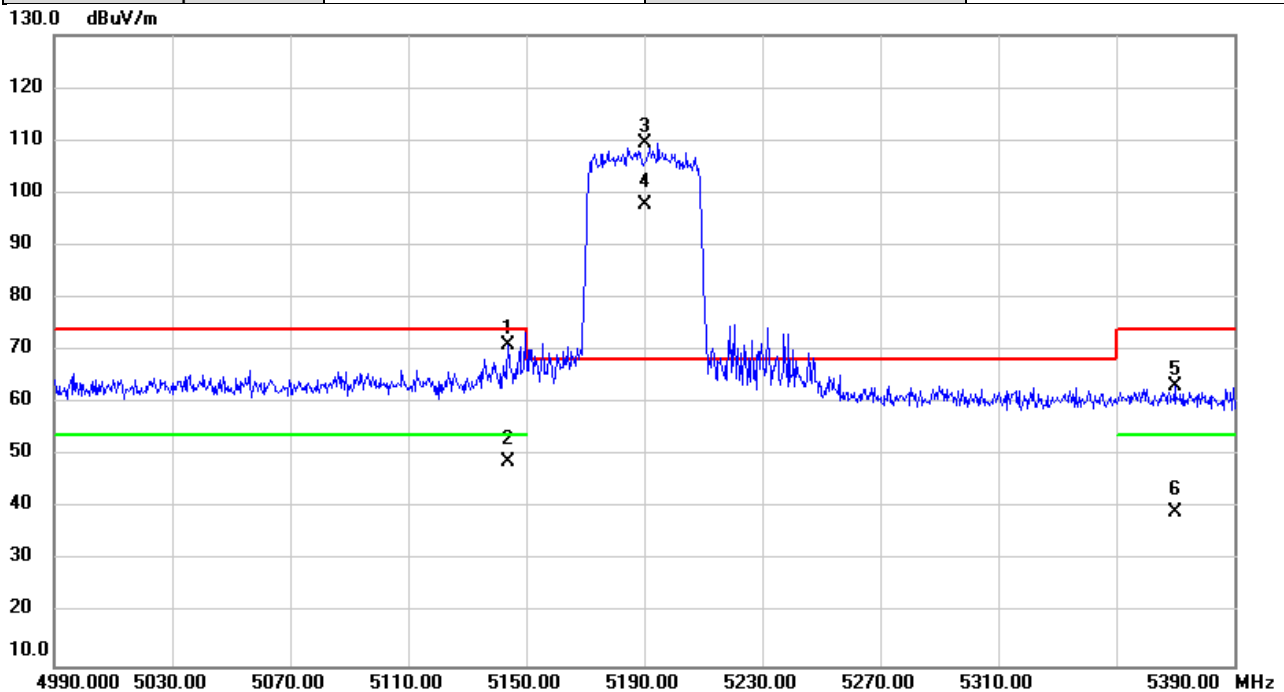


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5143.720	33.86	37.33	71.19	74.00	-2.81	peak	
2		5143.720	11.39	37.33	48.72	54.00	-5.28	AVG	
3	*	5190.000	72.03	37.39	109.42	68.20	41.22	peak	NoLimit
4	X	5190.000	60.37	37.39	97.76	68.20	29.56	AVG	NoLimit
5		5369.907	25.73	37.64	63.37	74.00	-10.63	peak	
6		5369.907	1.69	37.64	39.33	54.00	-14.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/8
Test Frequency	5230MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

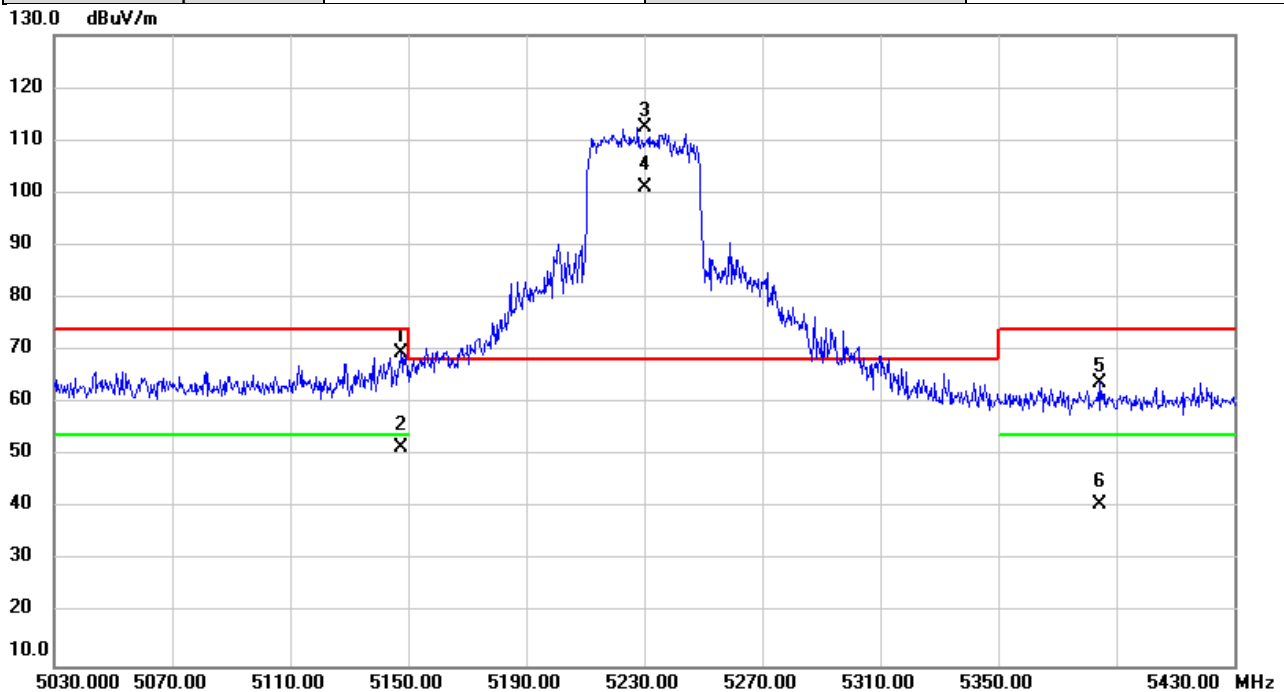


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5147.360	32.11	37.34	69.45	74.00	-4.55	peak	
2		5147.360	14.23	37.34	51.57	54.00	-2.43	AVG	
3	*	5230.000	74.99	37.44	112.43	68.20	44.23	peak	NoLimit
4	X	5230.000	63.47	37.44	100.91	68.20	32.71	AVG	NoLimit
5		5384.520	26.34	37.66	64.00	74.00	-10.00	peak	
6		5384.520	3.11	37.66	40.77	54.00	-13.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/8
Test Frequency	5270MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

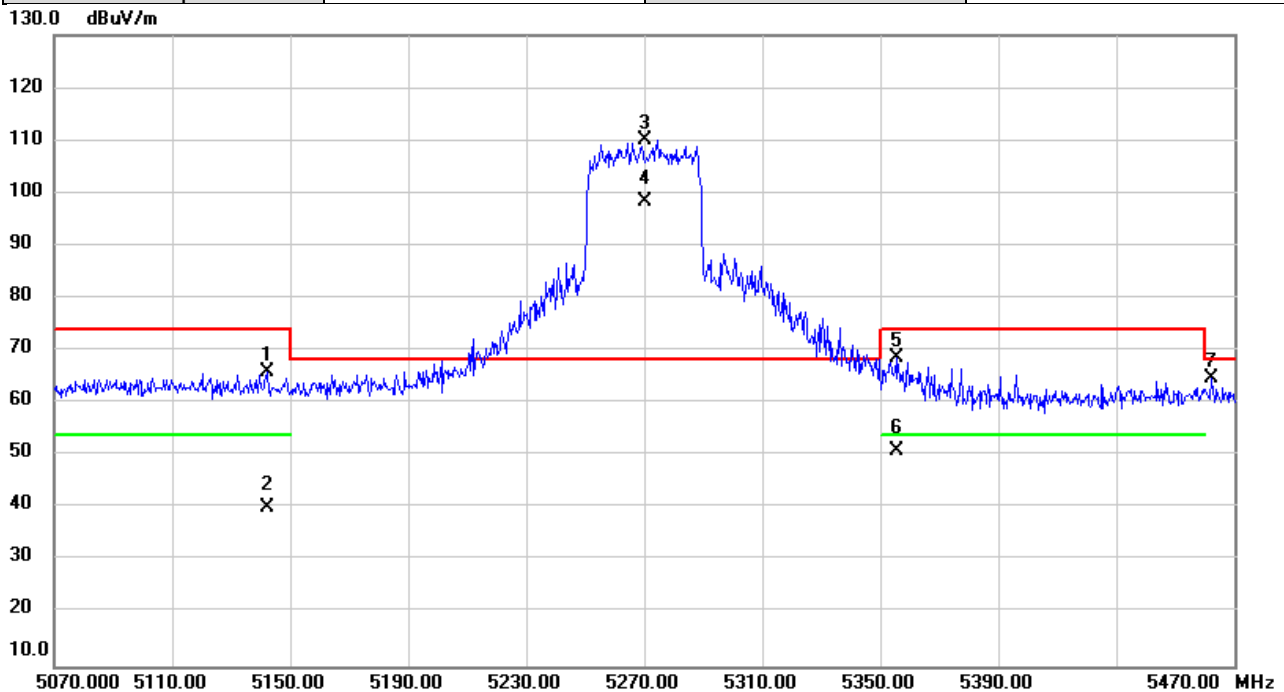


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5142.093	28.71	37.33	66.04	74.00	-7.96	peak	
2		5142.093	2.94	37.33	40.27	54.00	-13.73	AVG	
3	*	5270.000	72.61	37.51	110.12	68.20	41.92	peak	NoLimit
4	X	5270.000	60.80	37.51	98.31	68.20	30.11	AVG	NoLimit
5		5355.413	31.04	37.61	68.65	74.00	-5.35	peak	
6		5355.413	13.24	37.61	50.85	54.00	-3.15	AVG	
7		5462.053	26.95	37.76	64.71	68.20	-3.49	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/8
Test Frequency	5310MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

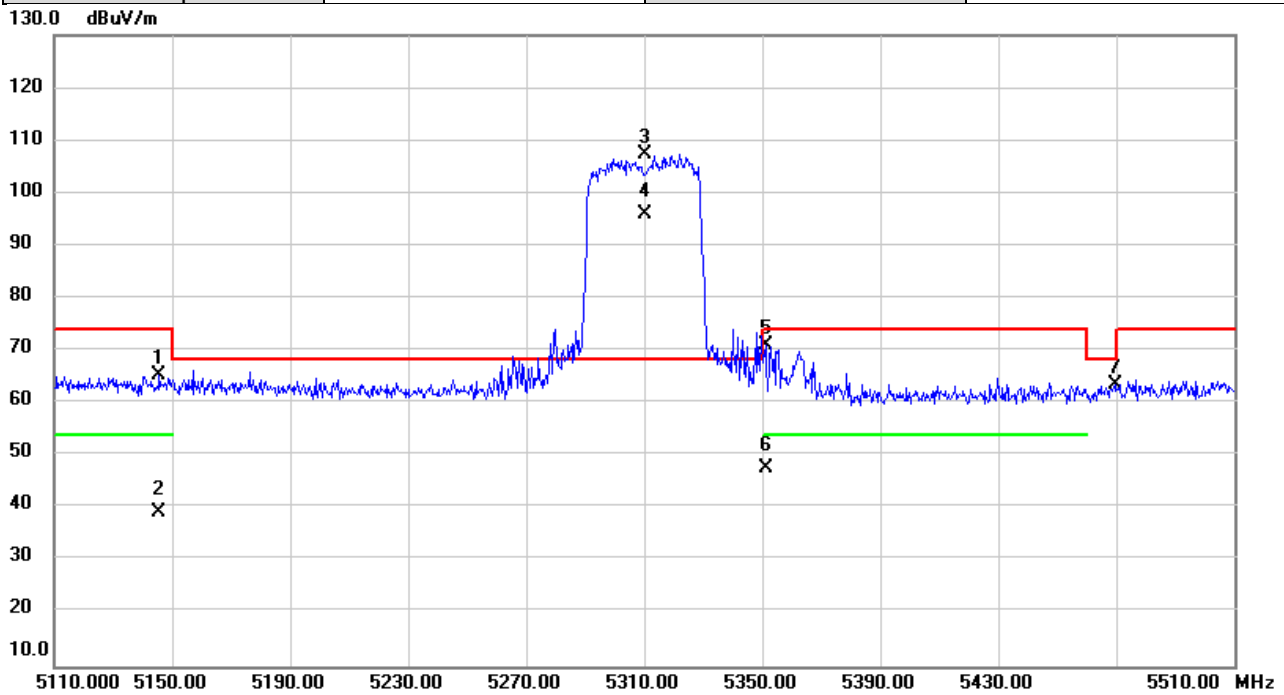


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5145.707	27.99	37.34	65.33	74.00	-8.67	peak	
2		5145.707	1.97	37.34	39.31	54.00	-14.69	AVG	
3	*	5310.000	69.77	37.56	107.33	68.20	39.13	peak	NoLimit
4	X	5310.000	58.53	37.56	96.09	68.20	27.89	AVG	NoLimit
5		5351.093	33.38	37.61	70.99	74.00	-3.01	peak	
6		5351.093	10.09	37.61	47.70	54.00	-6.30	AVG	
7		5469.480	25.80	37.77	63.57	68.20	-4.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/8
Test Frequency	5510MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

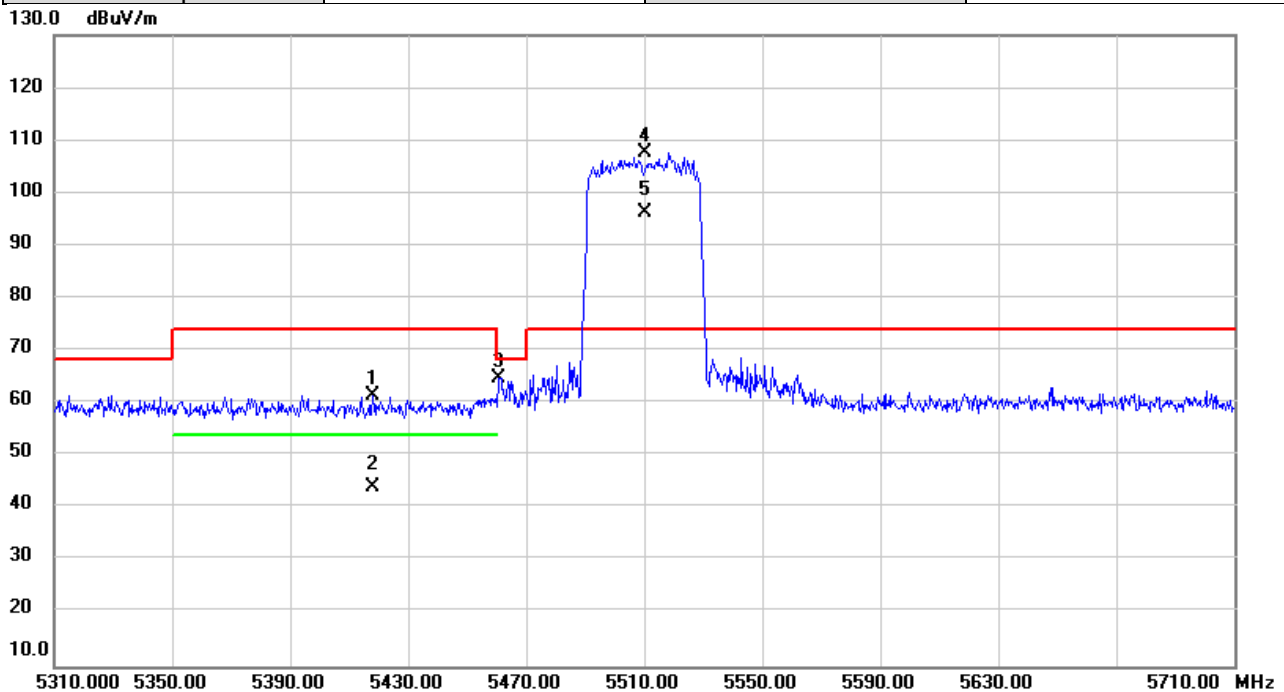


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5418.213	23.86	37.70	61.56	74.00	-12.44	peak	
2		5418.213	6.27	37.70	43.97	54.00	-10.03	AVG	
3		5460.933	27.10	37.76	64.86	68.20	-3.34	peak	
4	*	5510.000	69.71	37.83	107.54	74.00	33.54	peak	NoLimit
5	X	5510.000	58.29	37.83	96.12	74.00	22.12	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/8
Test Frequency	5670MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

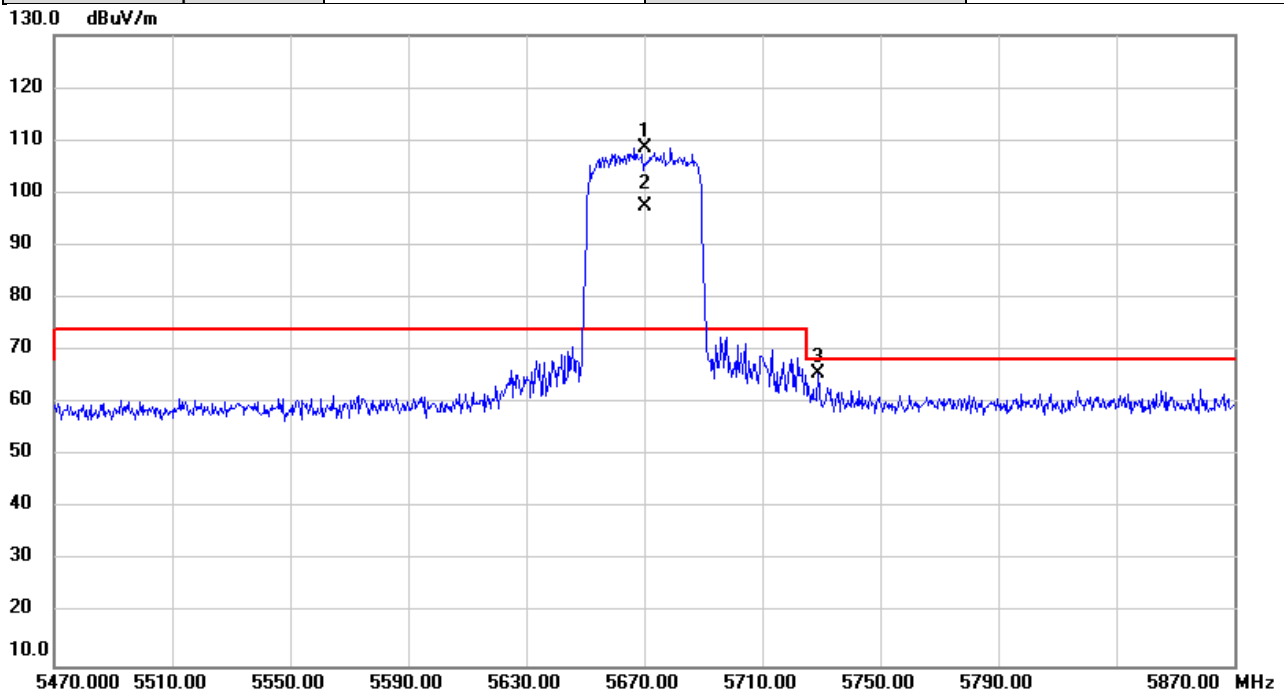


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5670.000	70.38	38.19	108.57	74.00	34.57	peak	NoLimit
2	X	5670.000	59.13	38.19	97.32	74.00	23.32	AVG	NoLimit
3		5728.760	27.46	38.32	65.78	68.20	-2.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/8
Test Frequency	5755MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

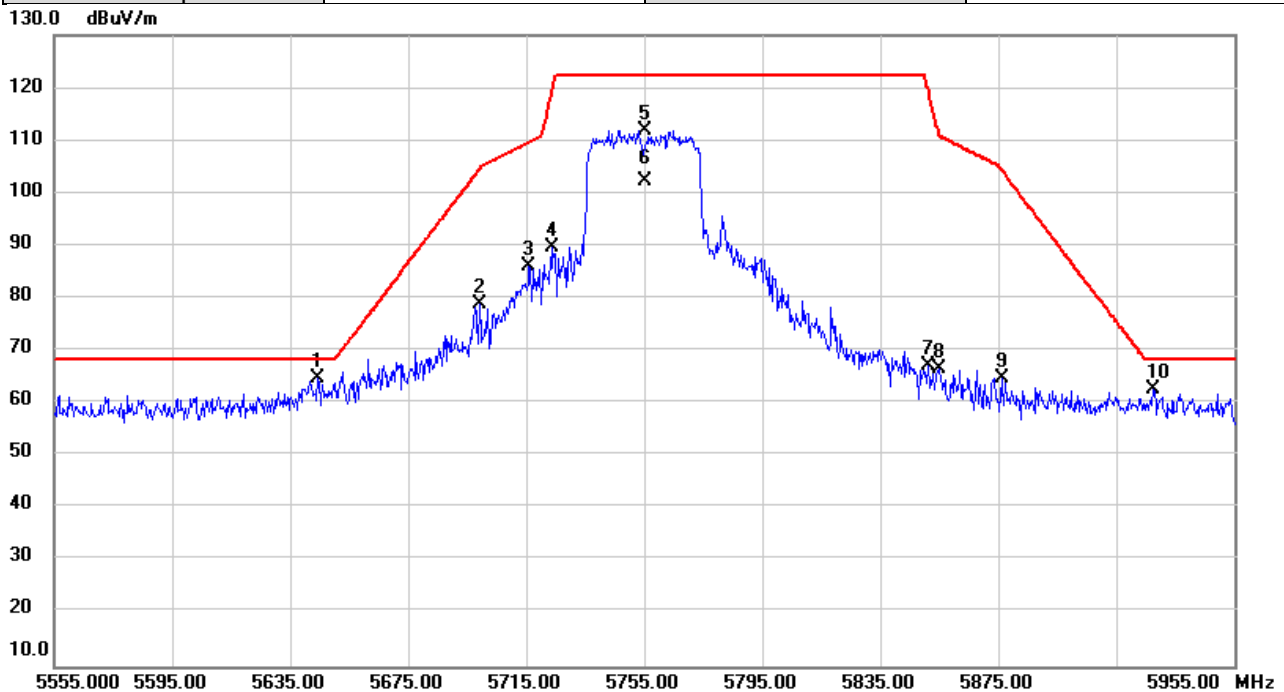


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5644.573	26.70	38.13	64.83	68.20	-3.37	peak	
2		5699.187	40.60	38.26	78.86	104.60	-25.74	peak	
3		5715.960	47.67	38.29	85.96	109.67	-23.71	peak	
4		5723.853	51.38	38.31	89.69	119.59	-29.90	peak	
5		5755.000	73.61	38.38	111.99	122.20	-10.21	peak	NoLimit
6		5755.000	63.83	38.38	102.21	122.20	-19.99	AVG	NoLimit
7		5851.040	28.48	38.59	67.07	119.83	-52.76	peak	
8		5855.013	27.86	38.61	66.47	110.80	-44.33	peak	
9		5876.160	26.11	38.66	64.77	104.34	-39.57	peak	
10		5927.787	23.83	38.77	62.60	68.20	-5.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/8
Test Frequency	5795MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

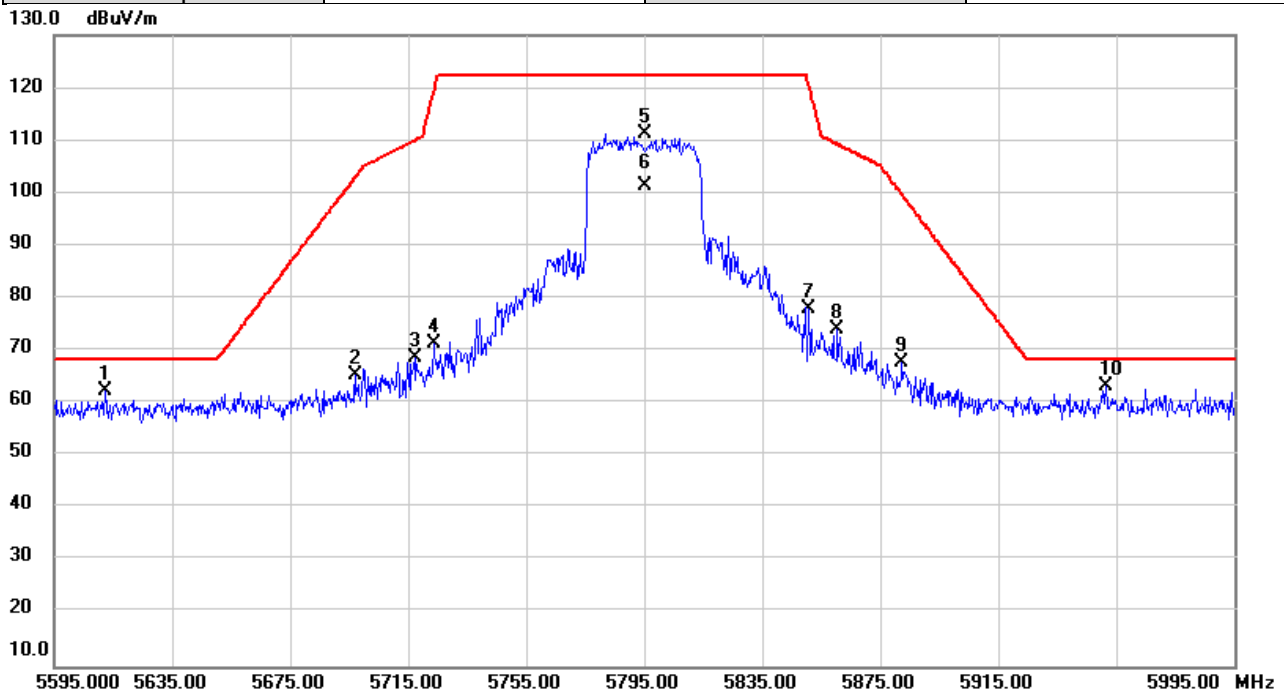


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5612.333	24.33	38.06	62.39	68.20	-5.81	peak	
2		5697.360	26.99	38.26	65.25	103.25	-38.00	peak	
3		5717.213	30.39	38.29	68.68	110.02	-41.34	peak	
4		5723.760	33.16	38.31	71.47	119.37	-47.90	peak	
5		5795.000	72.67	38.47	111.14	122.20	-11.06	peak	NoLimit
6		5795.000	62.93	38.47	101.40	122.20	-20.80	AVG	NoLimit
7		5850.720	39.29	38.59	77.88	120.56	-42.68	peak	
8		5860.360	35.30	38.61	73.91	109.30	-35.39	peak	
9		5882.240	29.12	38.67	67.79	99.82	-32.03	peak	
10	*	5951.600	24.56	38.82	63.38	68.20	-4.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/8
Test Frequency	5210MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

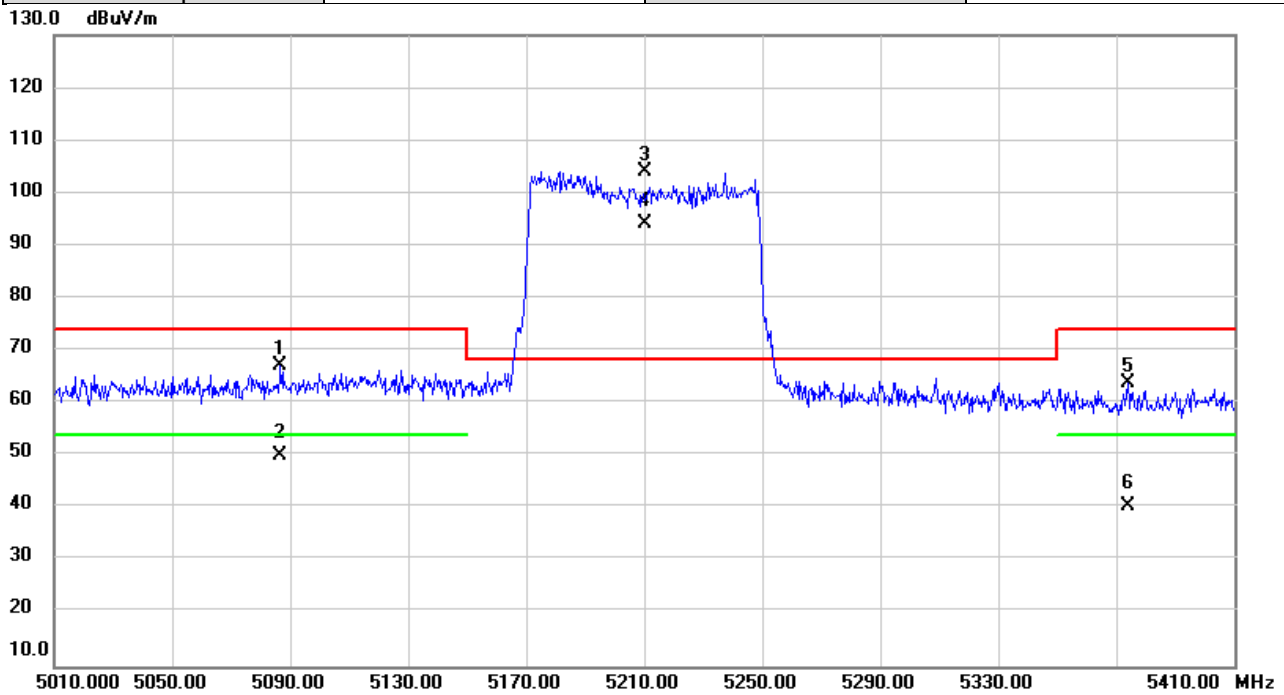


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5086.440	29.85	37.26	67.11	74.00	-6.89	peak	
2		5086.440	12.80	37.26	50.06	54.00	-3.94	AVG	
3	*	5210.000	66.71	37.42	104.13	68.20	35.93	peak	NoLimit
4	X	5210.000	56.69	37.42	94.11	68.20	25.91	AVG	NoLimit
5		5373.867	26.25	37.64	63.89	74.00	-10.11	peak	
6		5373.867	2.72	37.64	40.36	54.00	-13.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/8
Test Frequency	5290MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

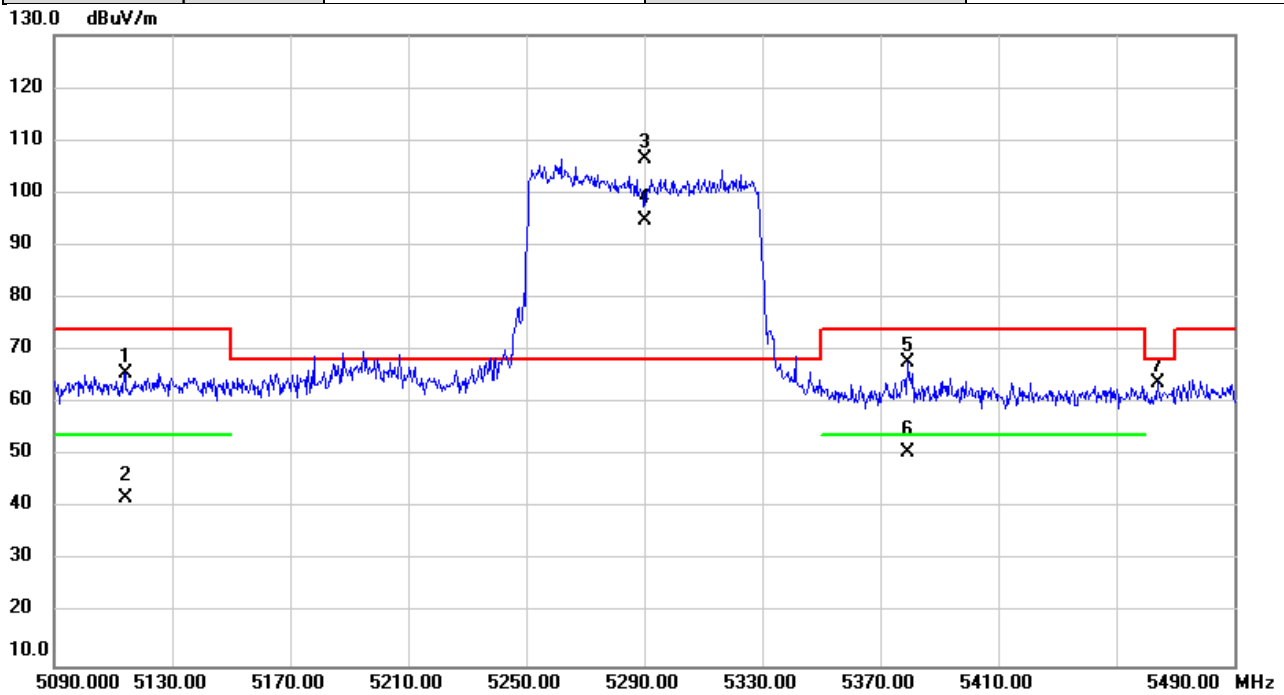


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5114.000	28.48	37.29	65.77	74.00	-8.23	peak	
2		5114.000	4.56	37.29	41.85	54.00	-12.15	AVG	
3	*	5290.000	69.07	37.53	106.60	68.20	38.40	peak	NoLimit
4	X	5290.000	57.22	37.53	94.75	68.20	26.55	AVG	NoLimit
5		5379.187	30.02	37.64	67.66	74.00	-6.34	peak	
6		5379.187	13.06	37.64	50.70	54.00	-3.30	AVG	
7		5463.907	26.07	37.76	63.83	68.20	-4.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/8
Test Frequency	5530MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

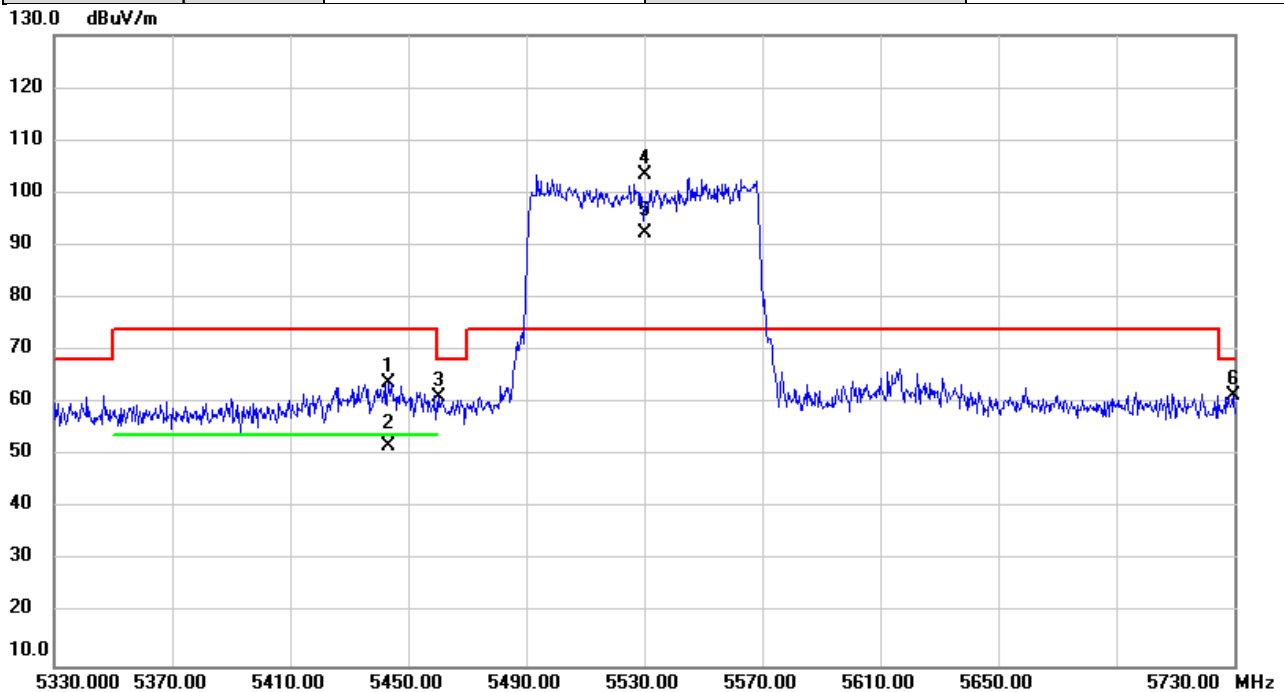


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5443.533	26.21	37.73	63.94	74.00	-10.06	peak	
2		5443.533	13.99	37.73	51.72	54.00	-2.28	AVG	
3		5460.320	23.25	37.76	61.01	68.20	-7.19	peak	
4	*	5530.000	65.47	37.88	103.35	74.00	29.35	peak	NoLimit
5	X	5530.000	54.50	37.88	92.38	74.00	18.38	AVG	NoLimit
6		5729.507	23.10	38.32	61.42	68.20	-6.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/8
Test Frequency	5610MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

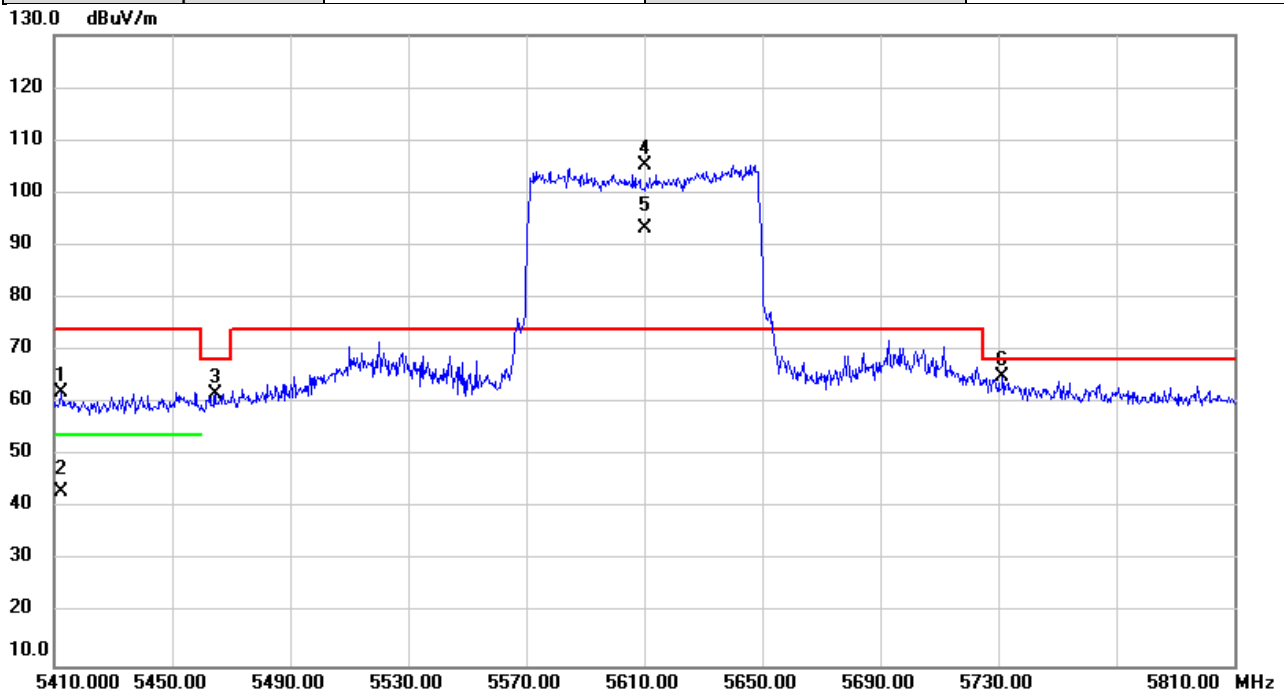


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5412.227	24.38	37.69	62.07	74.00	-11.93	peak	
2		5412.227	5.49	37.69	43.18	54.00	-10.82	AVG	
3		5464.640	24.00	37.76	61.76	68.20	-6.44	peak	
4	*	5610.000	67.15	38.05	105.20	74.00	31.20	peak	NoLimit
5	X	5610.000	55.28	38.05	93.33	74.00	19.33	AVG	NoLimit
6		5731.507	26.69	38.32	65.01	68.20	-3.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/8
Test Frequency	5775MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

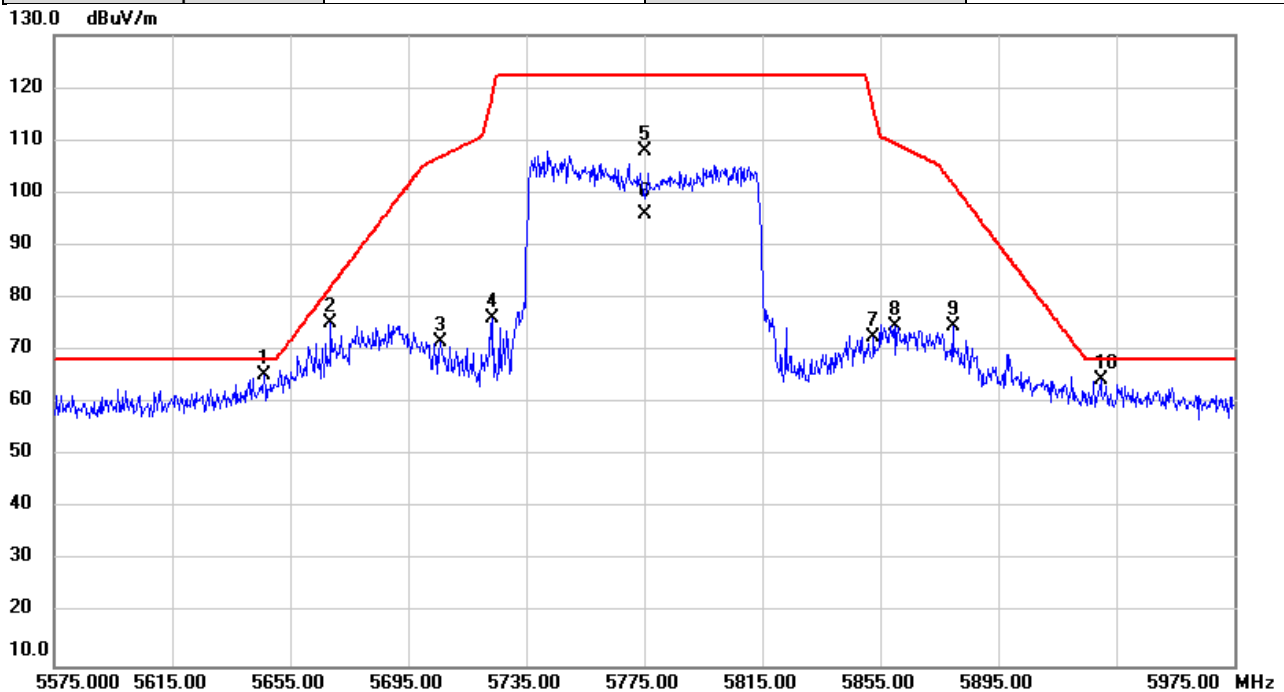


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5646.107	27.20	38.13	65.33	68.20	-2.87	peak	
2		5668.787	37.04	38.19	75.23	82.14	-6.91	peak	
3		5706.053	33.34	38.27	71.61	106.90	-35.29	peak	
4		5723.453	37.79	38.31	76.10	118.67	-42.57	peak	
5		5775.000	69.43	38.42	107.85	122.20	-14.35	peak	NoLimit
6		5775.000	57.44	38.42	95.86	122.20	-26.34	AVG	NoLimit
7		5852.693	33.81	38.60	72.41	116.06	-43.65	peak	
8		5860.000	36.10	38.61	74.71	109.40	-34.69	peak	
9		5879.587	35.94	38.66	74.60	101.79	-27.19	peak	
10		5929.773	25.57	38.77	64.34	68.20	-3.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5180MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

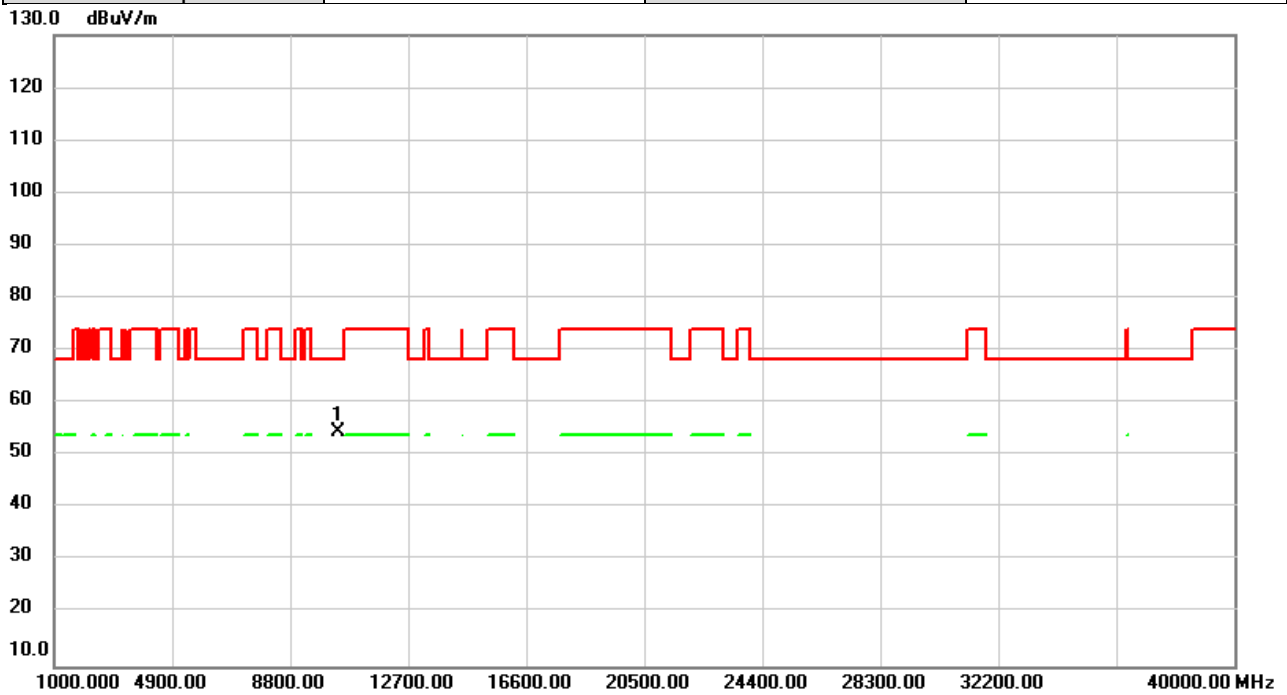


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	53.34	1.28	54.62	68.20	-13.58	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5180MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

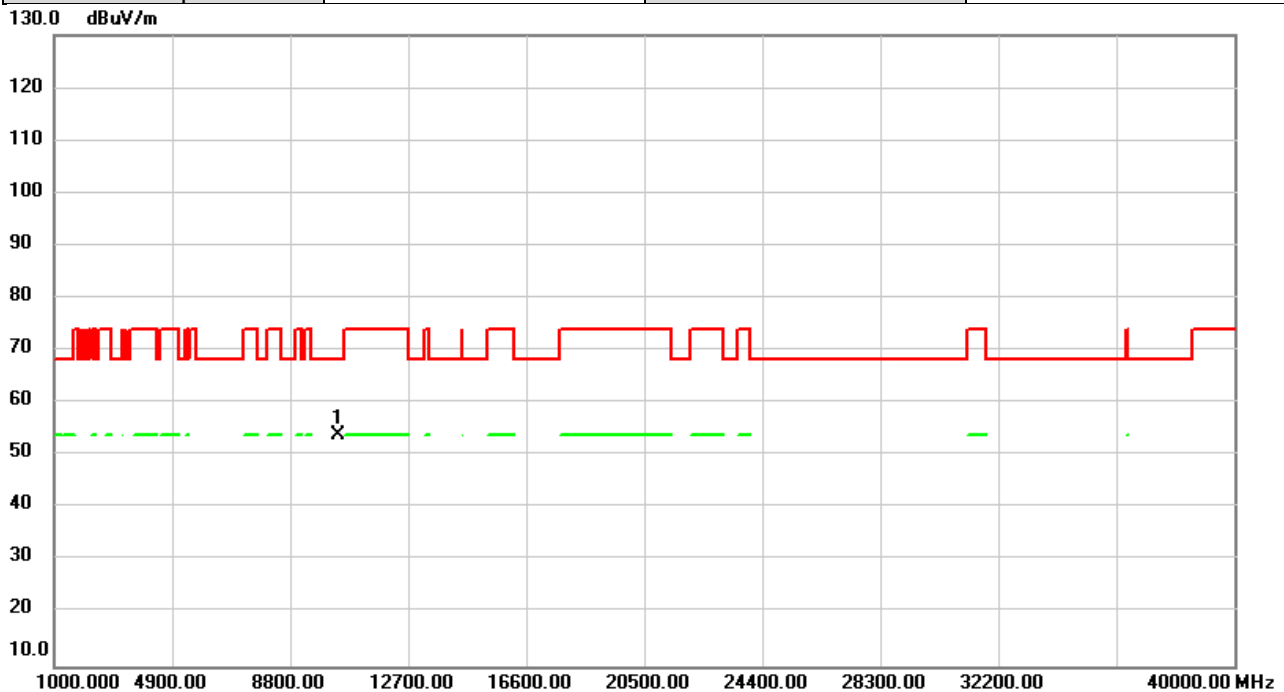


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	52.80	1.28	54.08	68.20	-14.12	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5200MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

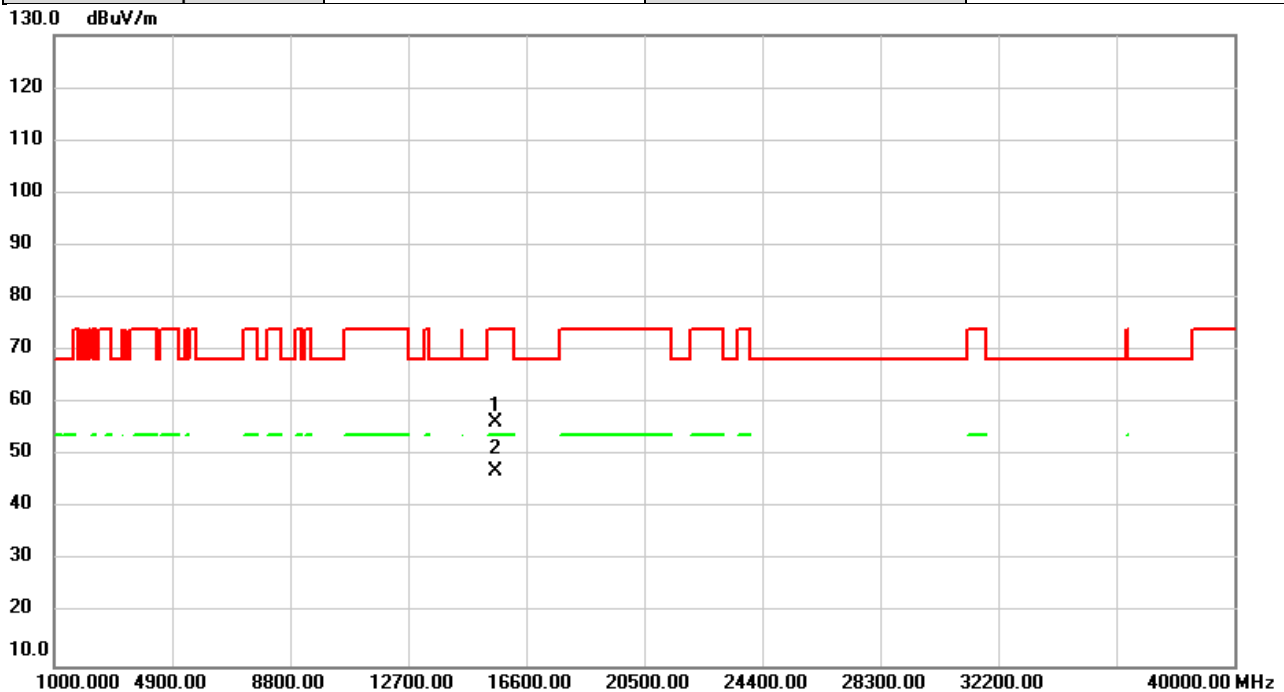


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		15600.00	52.57	3.63	56.20	74.00	-17.80	peak	
2	*	15600.00	43.56	3.63	47.19	54.00	-6.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5200MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

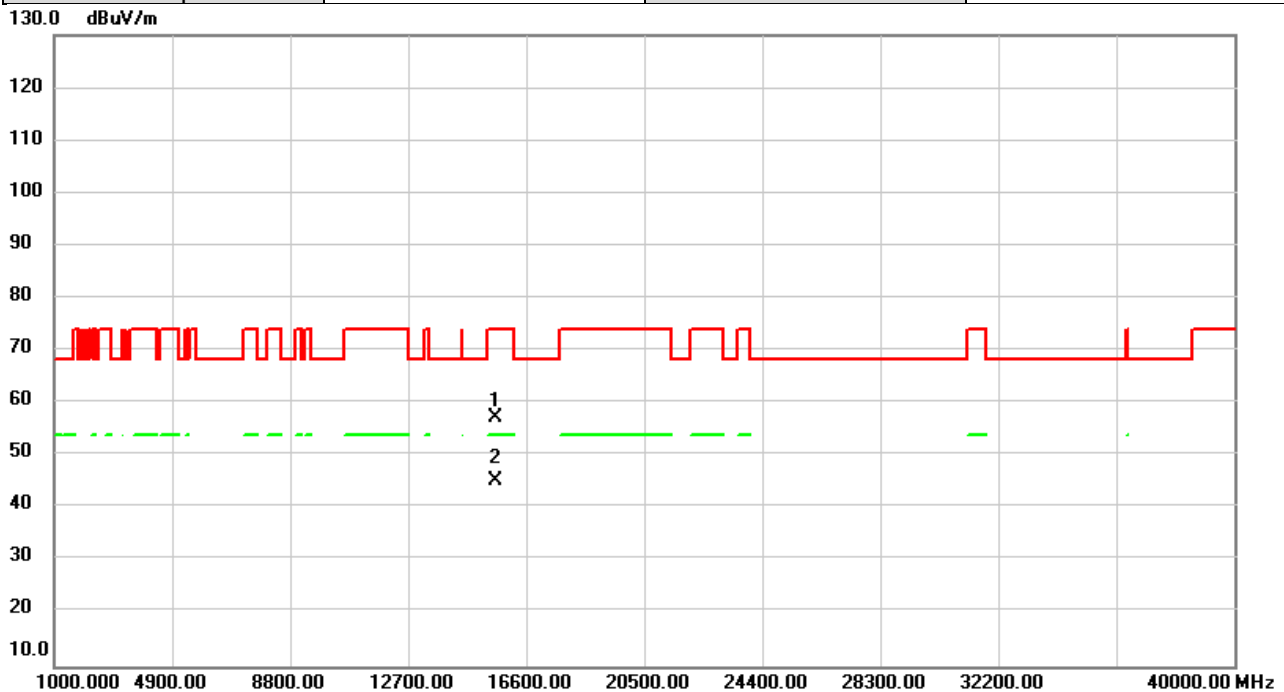


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15600.00	53.58	3.63	57.21	74.00	-16.79	peak	
2	*	15600.00	41.66	3.63	45.29	54.00	-8.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5240MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

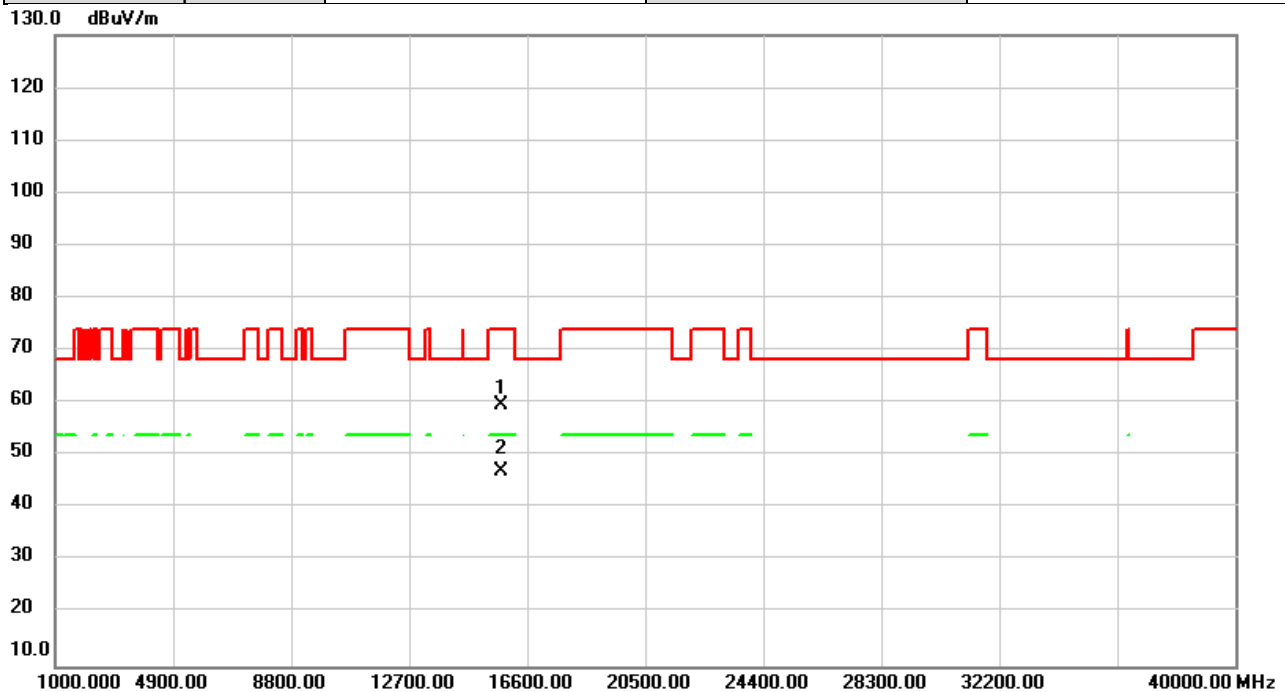


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15720.00	56.29	3.45	59.74	74.00	-14.26	peak	
2	*	15720.00	43.52	3.45	46.97	54.00	-7.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5240MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

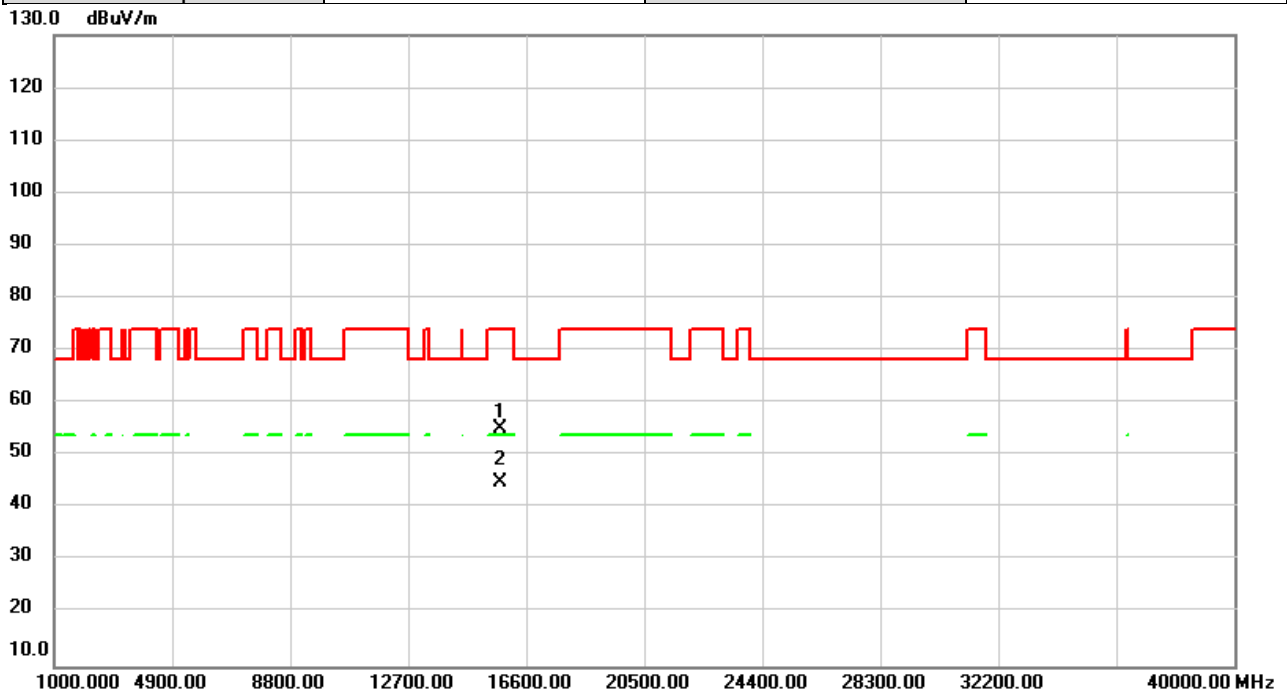


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15720.00	51.83	3.45	55.28	74.00	-18.72	peak	
2	*	15720.00	41.61	3.45	45.06	54.00	-8.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5260MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

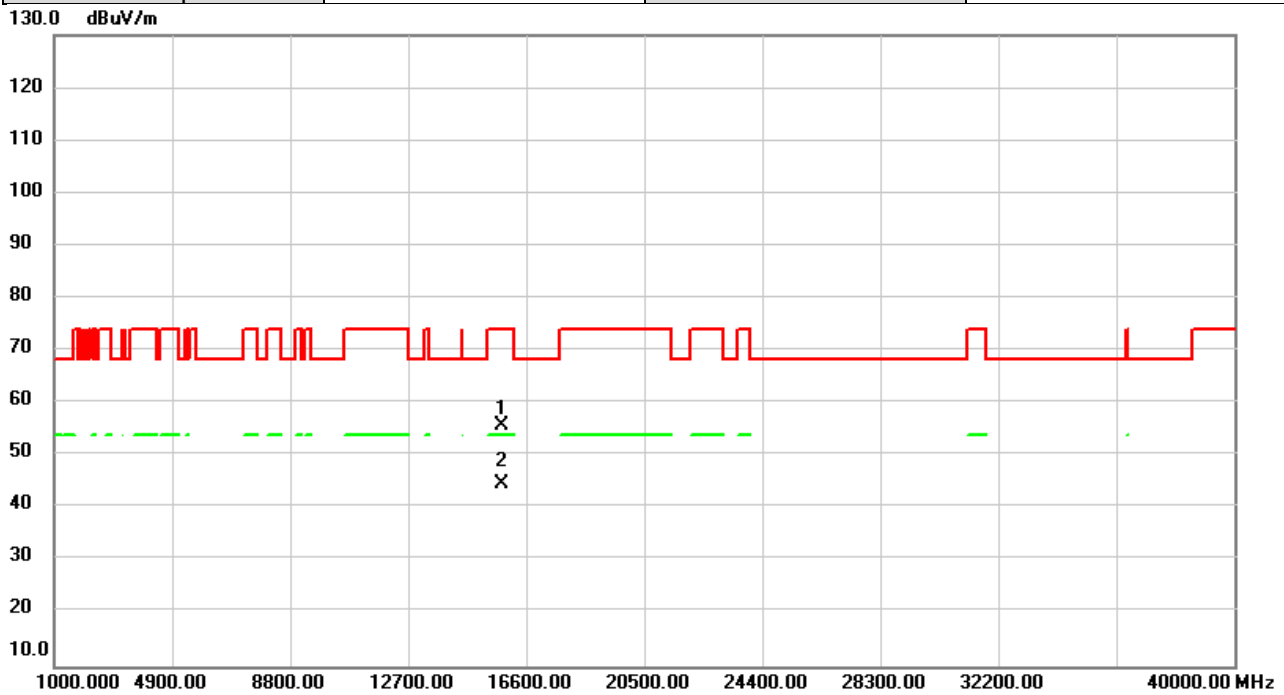


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15780.00	52.44	3.37	55.81	74.00	-18.19	peak	
2	*	15780.00	41.40	3.37	44.77	54.00	-9.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5260MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

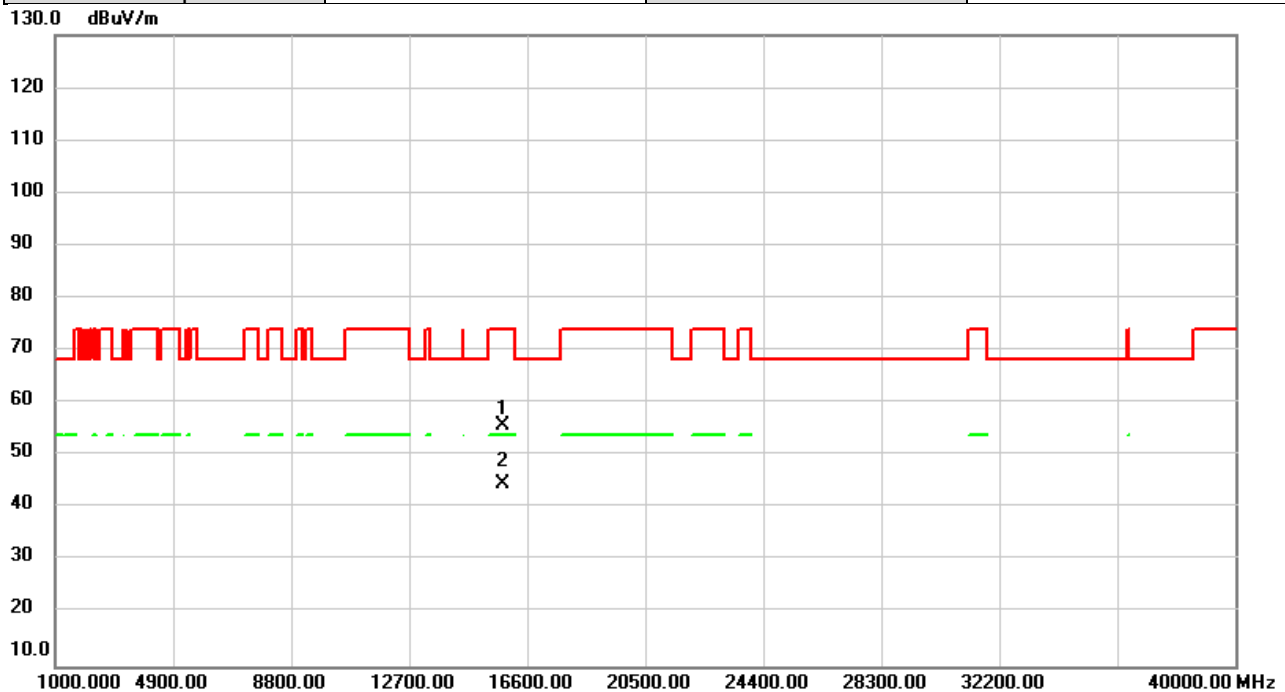


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15780.00	52.37	3.37	55.74	74.00	-18.26	peak	
2	*	15780.00	41.28	3.37	44.65	54.00	-9.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5300MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

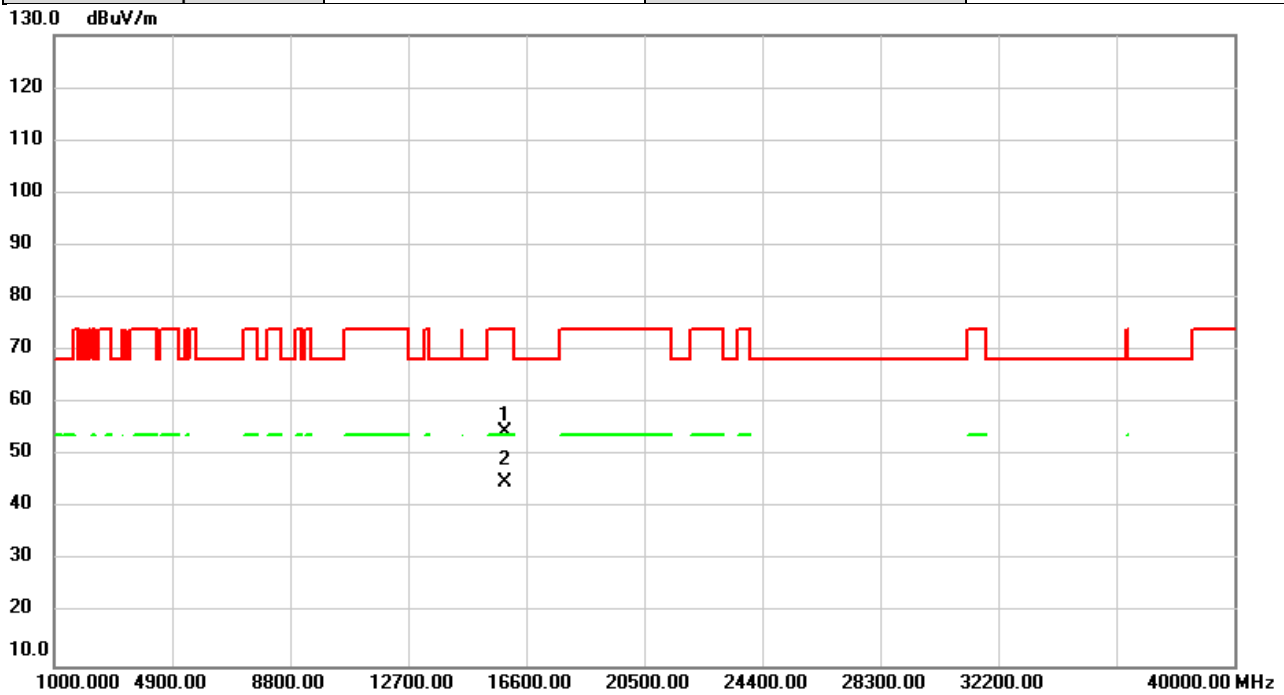


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15900.00	51.43	3.19	54.62	74.00	-19.38	peak	
2	*	15900.00	41.75	3.19	44.94	54.00	-9.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5300MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

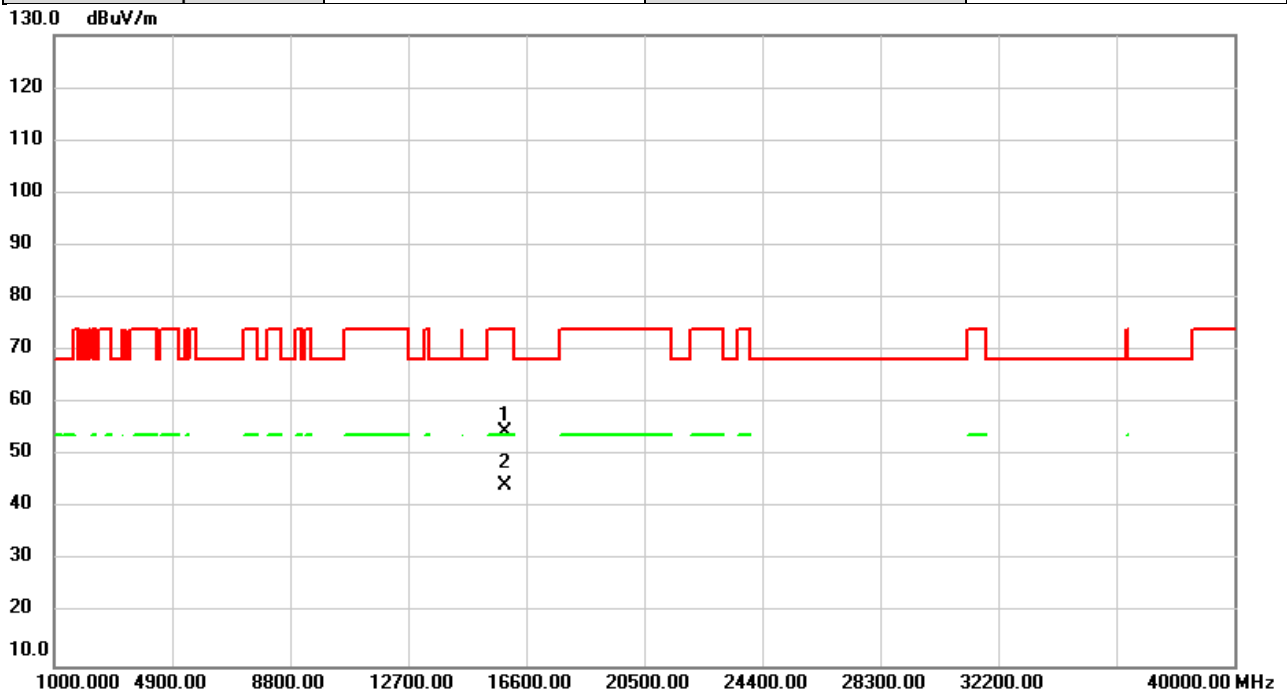


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15900.00	51.44	3.19	54.63	74.00	-19.37	peak	
2	*	15900.00	41.31	3.19	44.50	54.00	-9.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5320MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

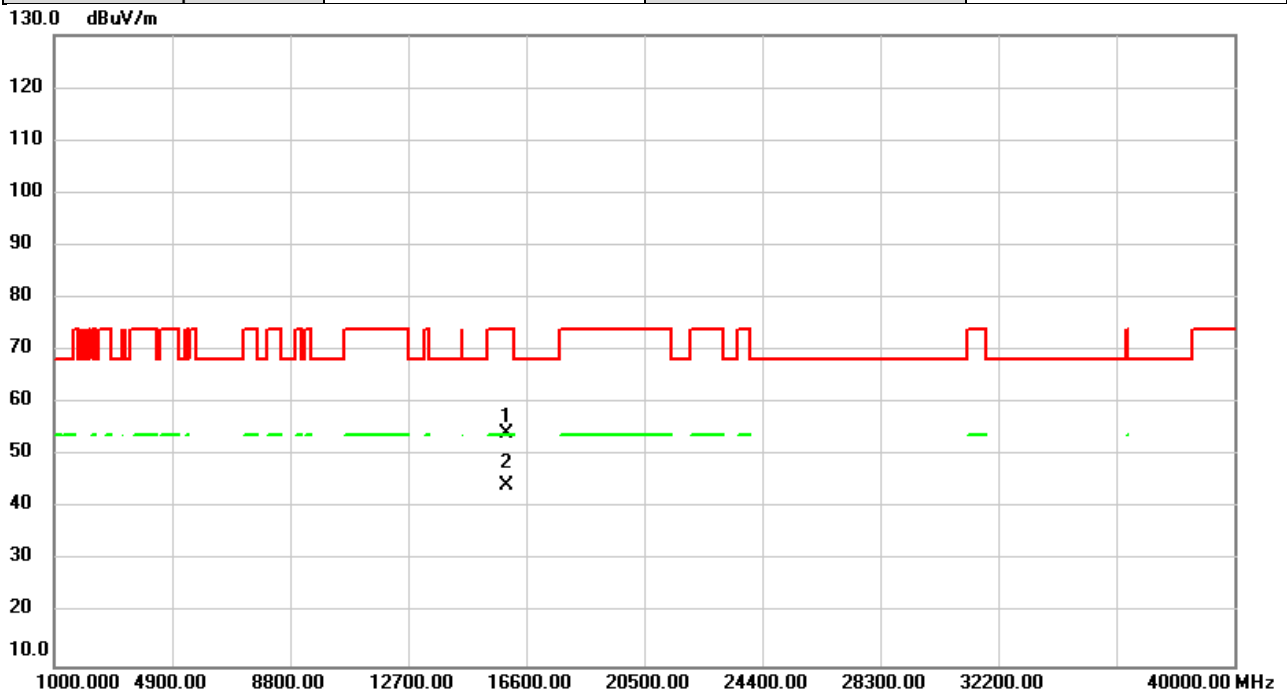


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15960.00	51.15	3.10	54.25	74.00	-19.75	peak	
2	*	15960.00	41.10	3.10	44.20	54.00	-9.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5320MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

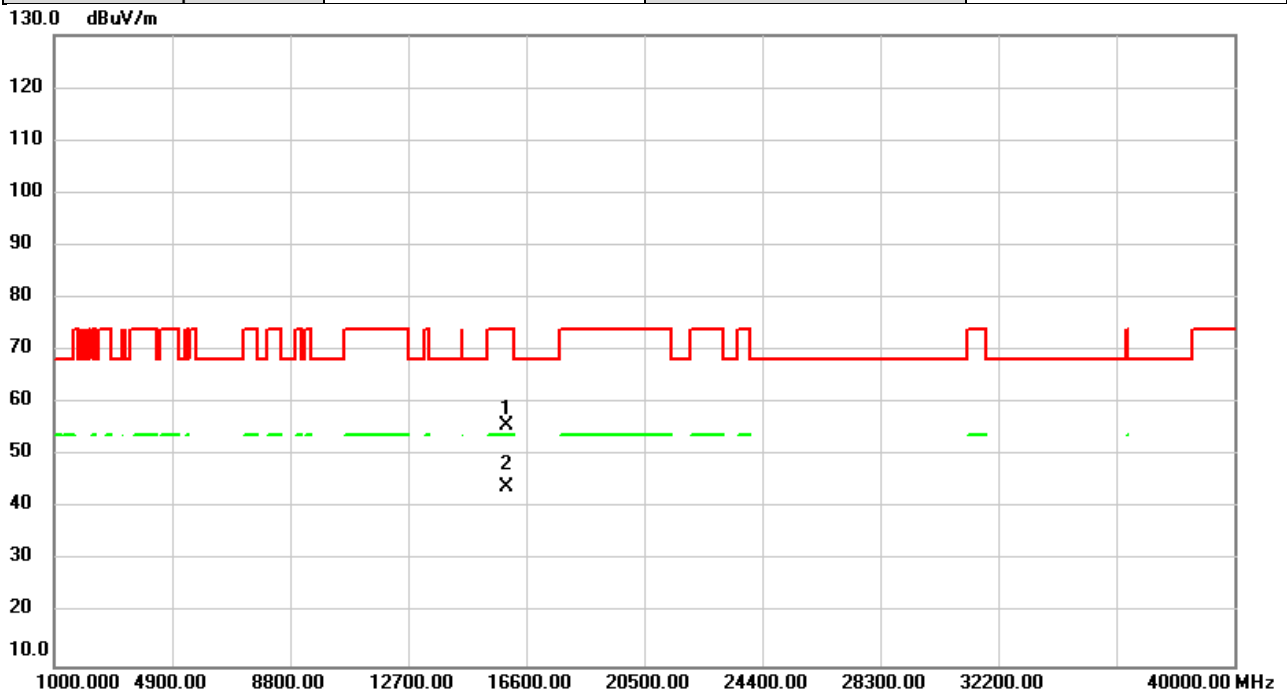


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15960.00	52.70	3.10	55.80	74.00	-18.20	peak	
2	*	15960.00	41.00	3.10	44.10	54.00	-9.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5500MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

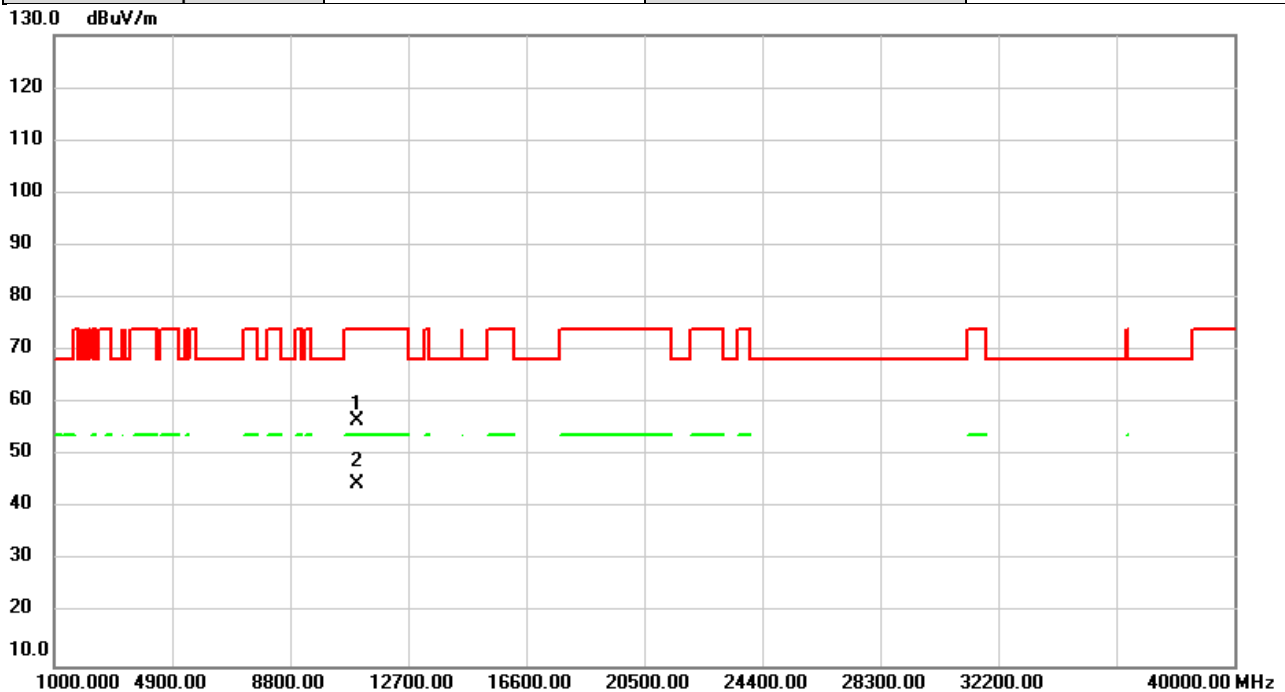


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	53.24	3.27	56.51	74.00	-17.49	peak	
2	*	11000.00	41.32	3.27	44.59	54.00	-9.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5500MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

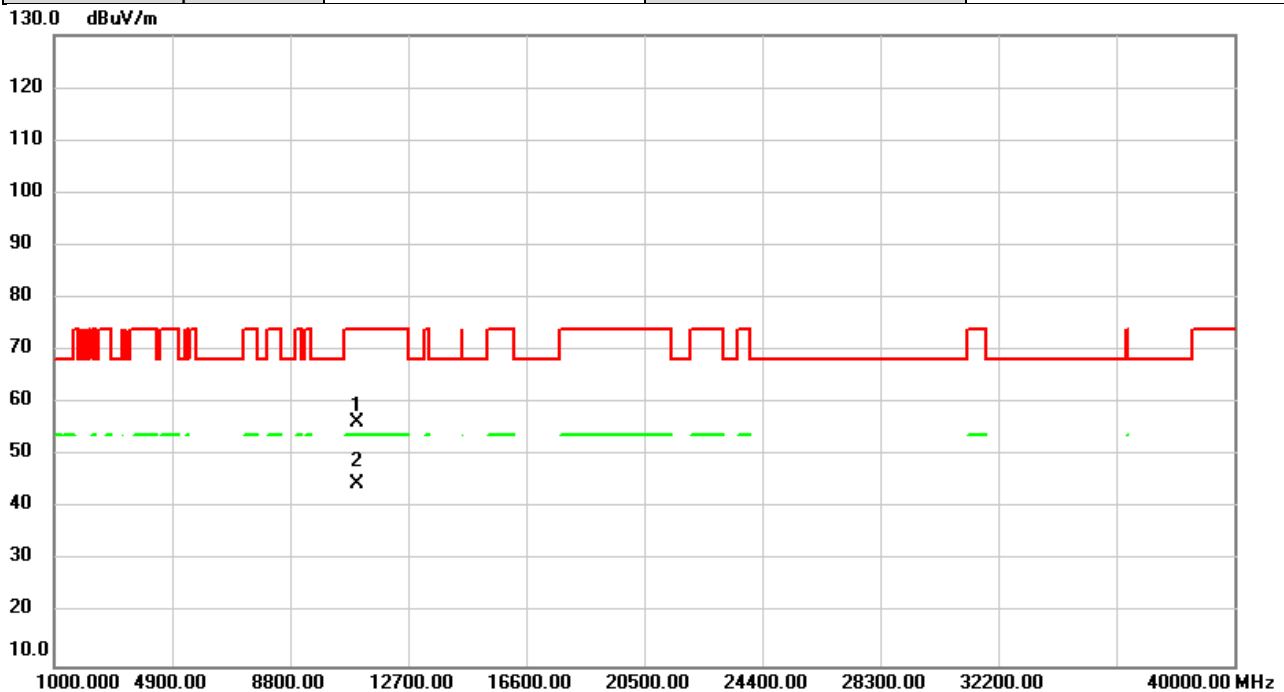


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	52.94	3.27	56.21	74.00	-17.79	peak	
2	*	11000.00	41.25	3.27	44.52	54.00	-9.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5580MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

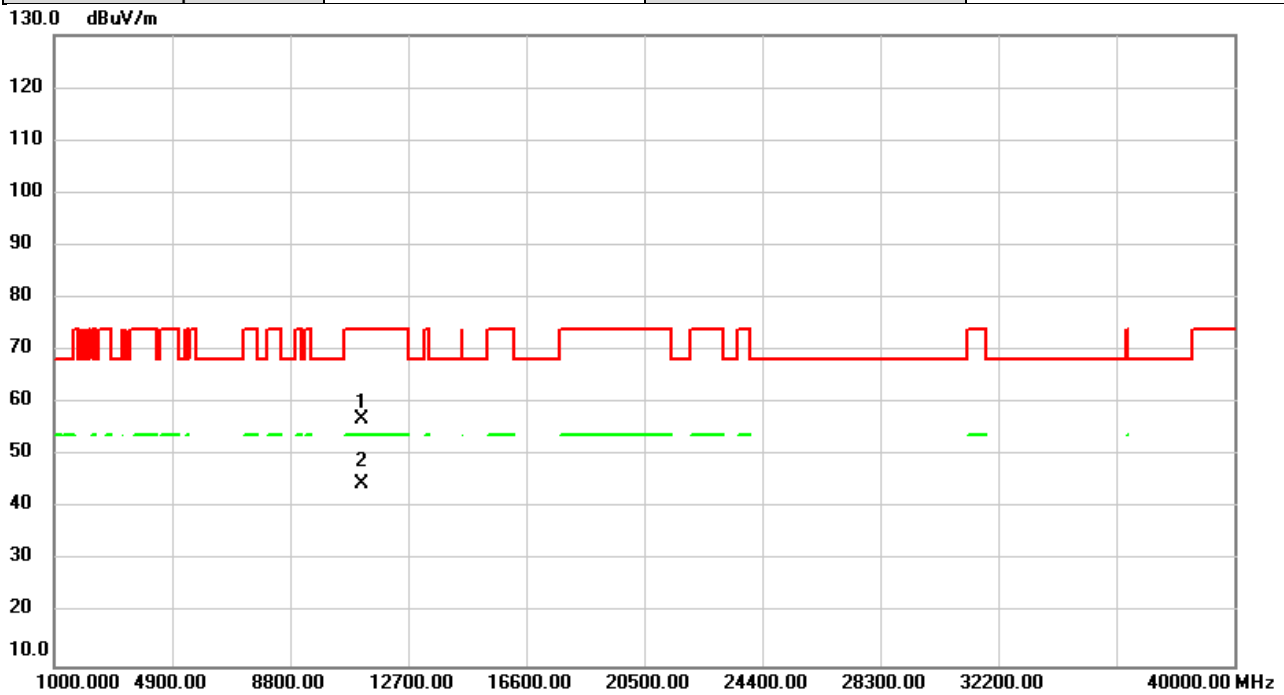


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	53.92	2.93	56.85	74.00	-17.15	peak	
2	*	11160.00	41.73	2.93	44.66	54.00	-9.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5580MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

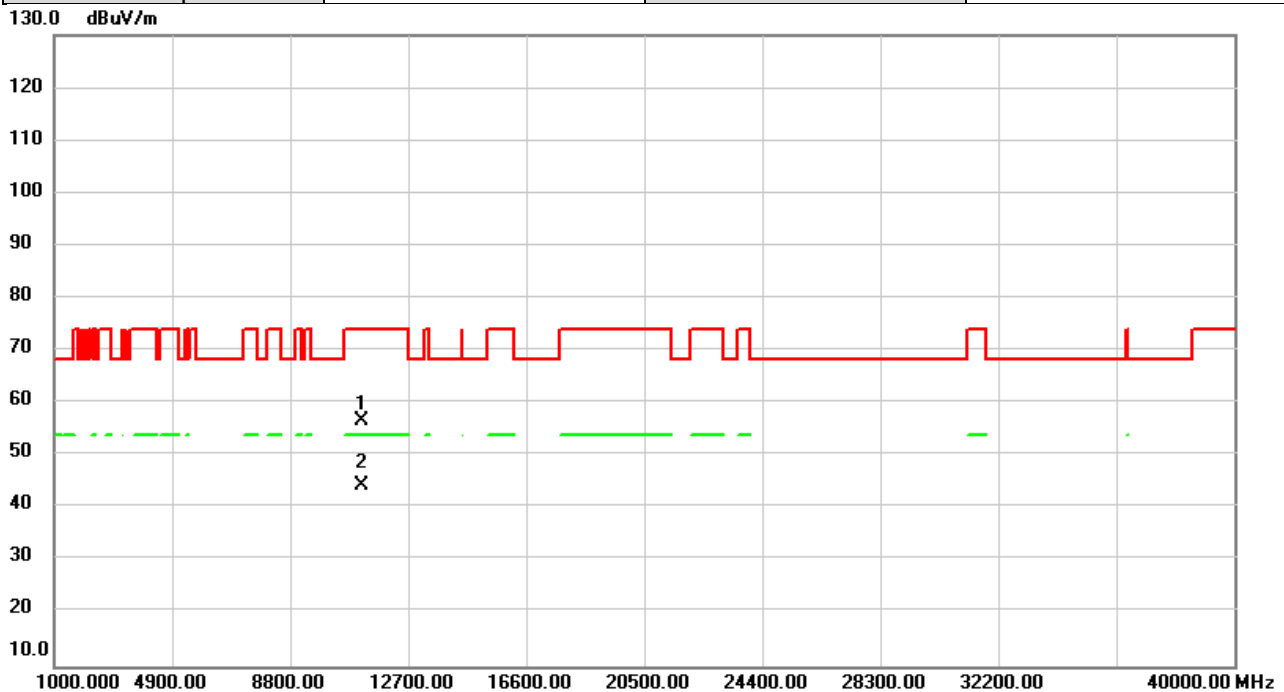


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	53.84	2.93	56.77	74.00	-17.23	peak	
2	*	11160.00	41.49	2.93	44.42	54.00	-9.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5700MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

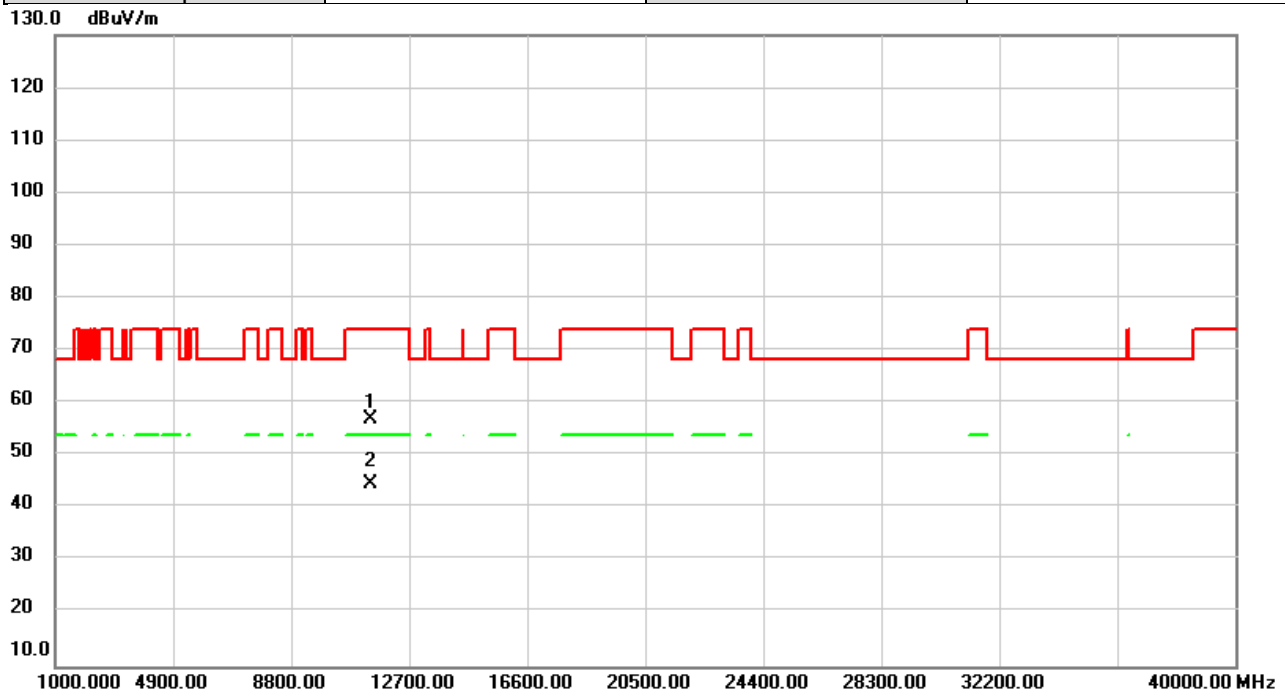


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	54.53	2.44	56.97	74.00	-17.03	peak	
2	*	11400.00	42.07	2.44	44.51	54.00	-9.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5700MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

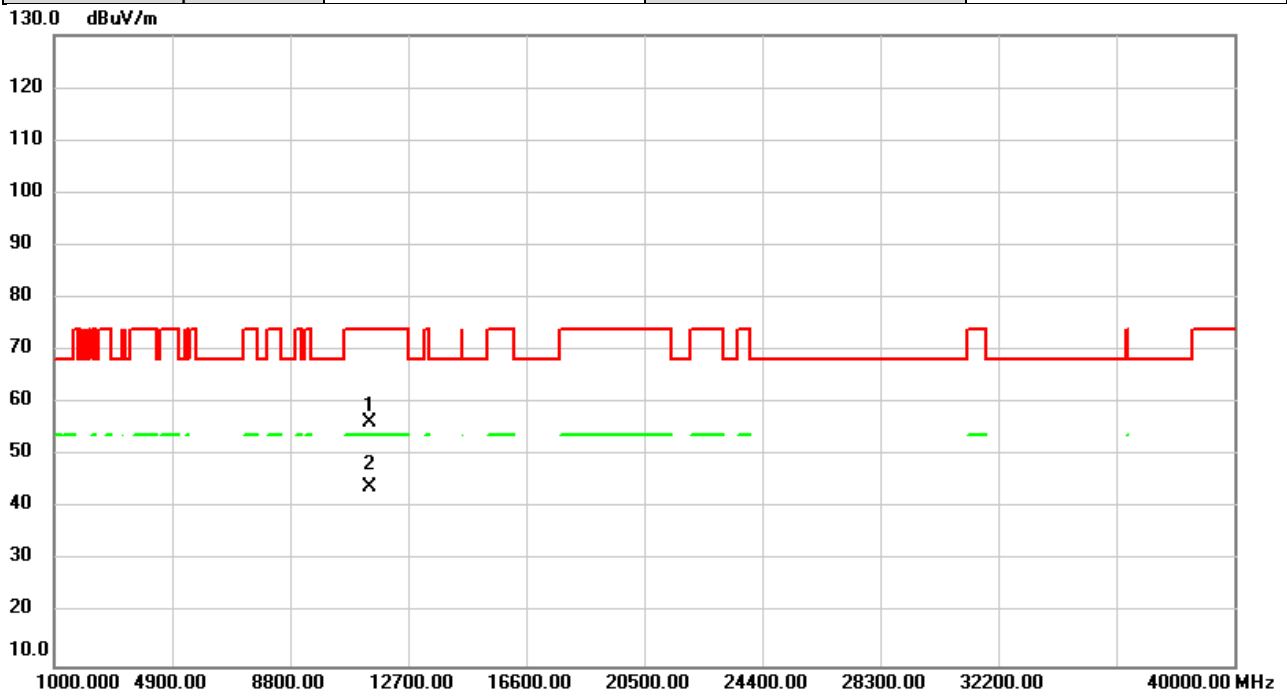


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	53.85	2.44	56.29	74.00	-17.71	peak	
2	*	11400.00	41.70	2.44	44.14	54.00	-9.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5720MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

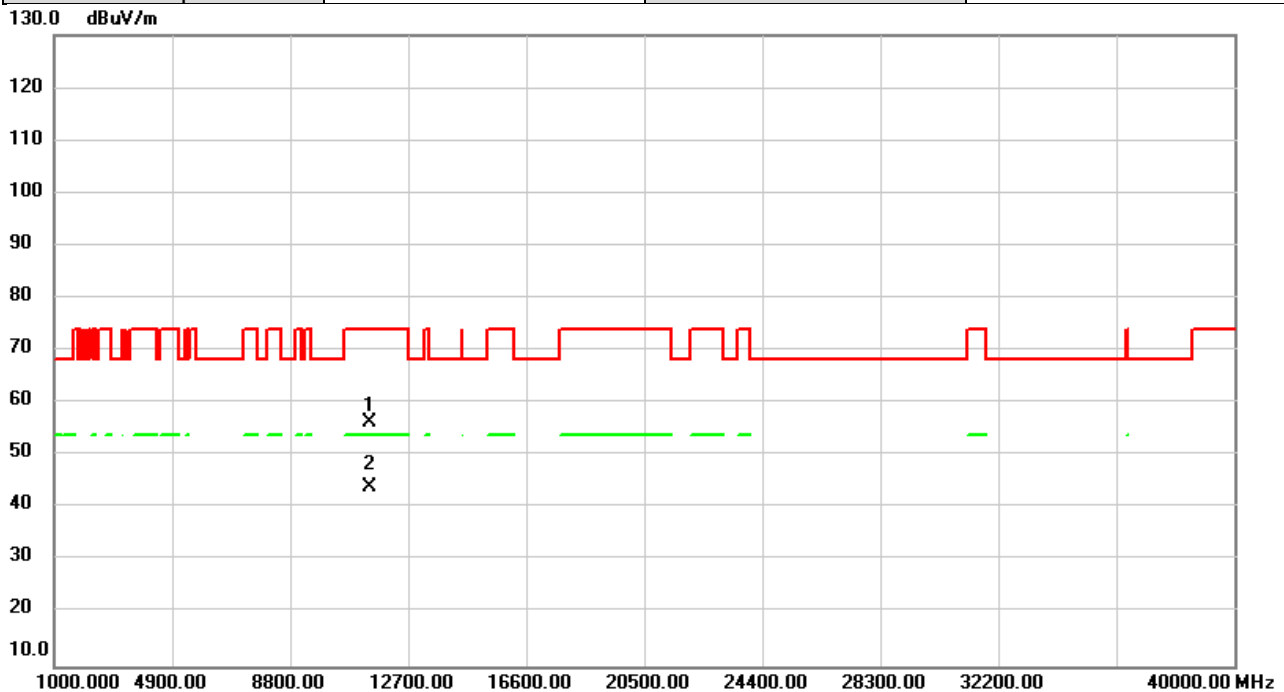


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	53.88	2.36	56.24	74.00	-17.76	peak	
2	*	11440.00	41.63	2.36	43.99	54.00	-10.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5720MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

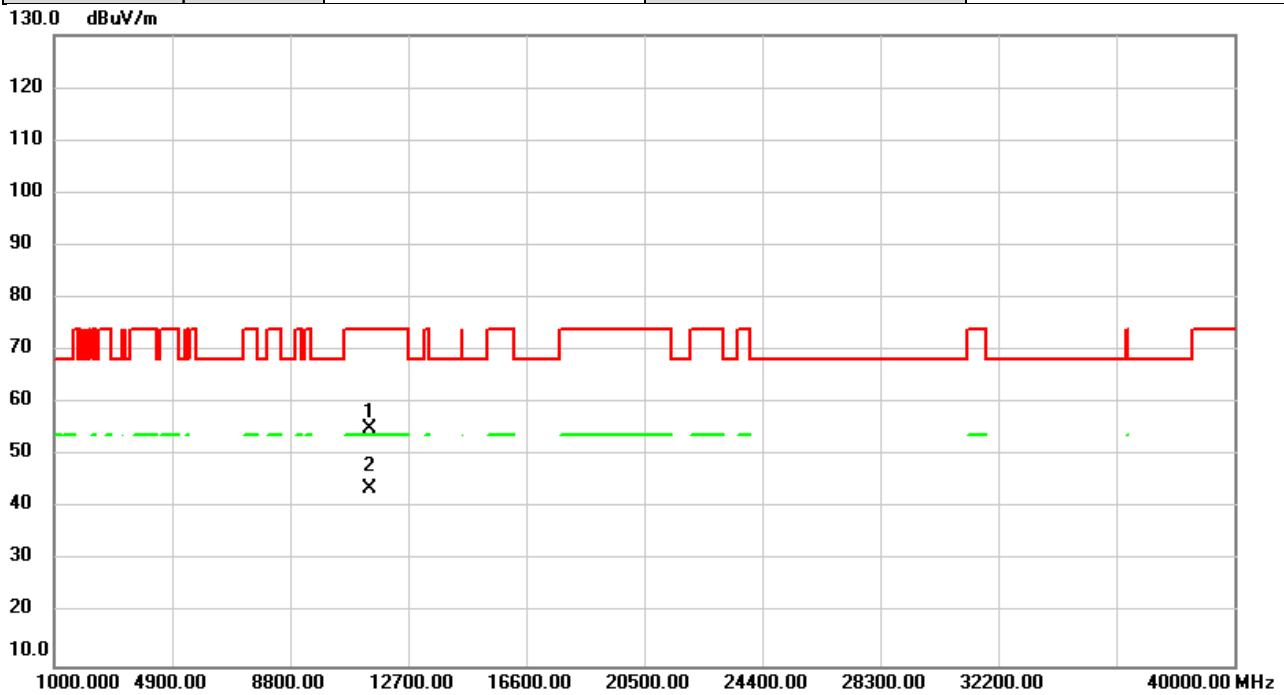


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	52.66	2.36	55.02	74.00	-18.98	peak	
2	*	11440.00	41.26	2.36	43.62	54.00	-10.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5745MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

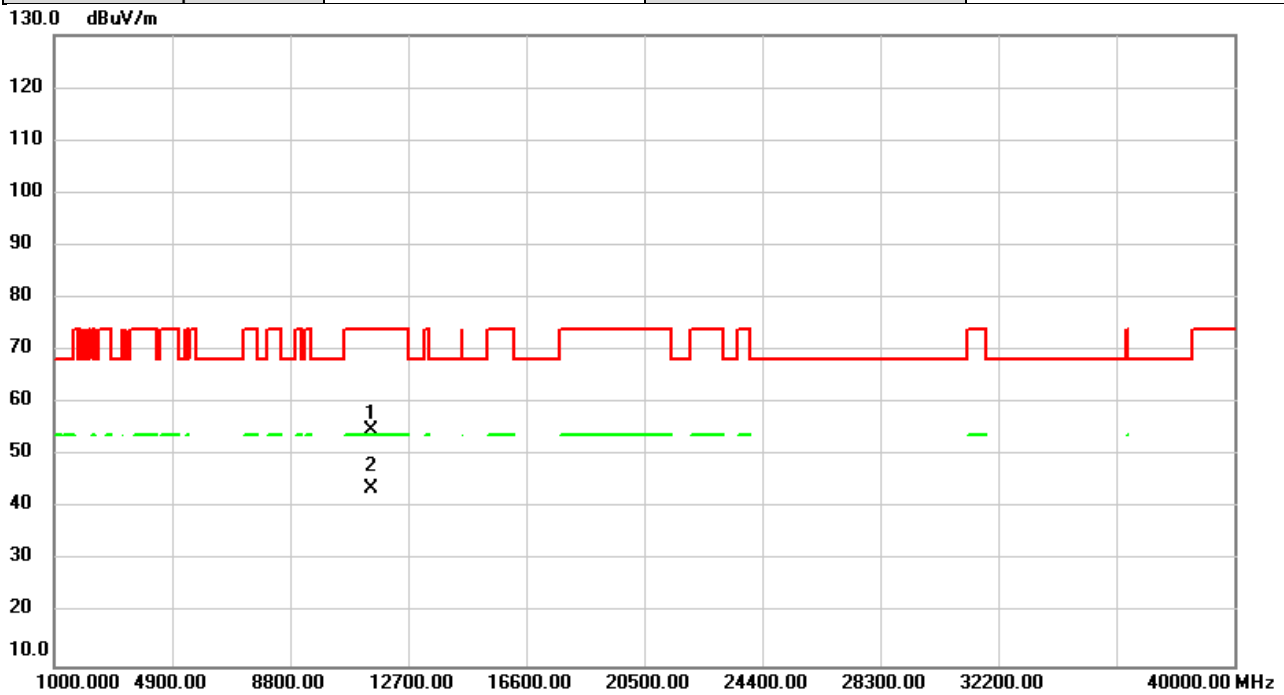


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	52.68	2.26	54.94	74.00	-19.06	peak	
2	*	11490.00	41.48	2.26	43.74	54.00	-10.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5745MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

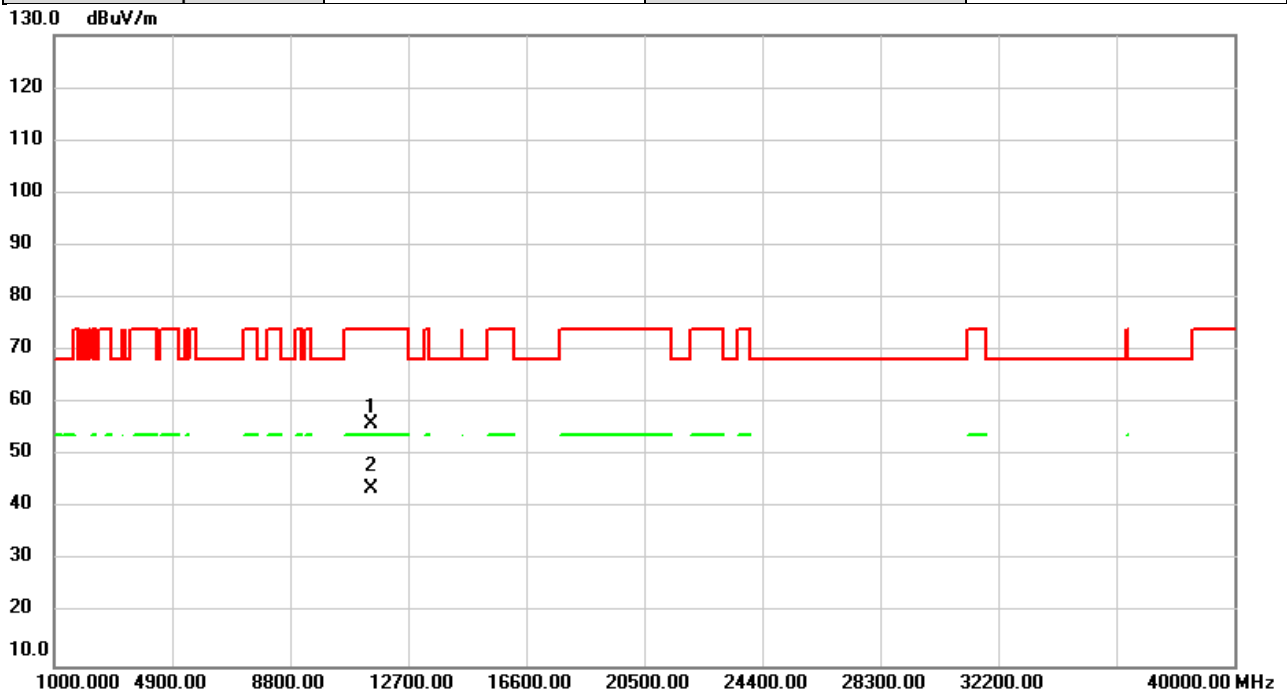


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	53.65	2.26	55.91	74.00	-18.09	peak	
2	*	11490.00	41.38	2.26	43.64	54.00	-10.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5785MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

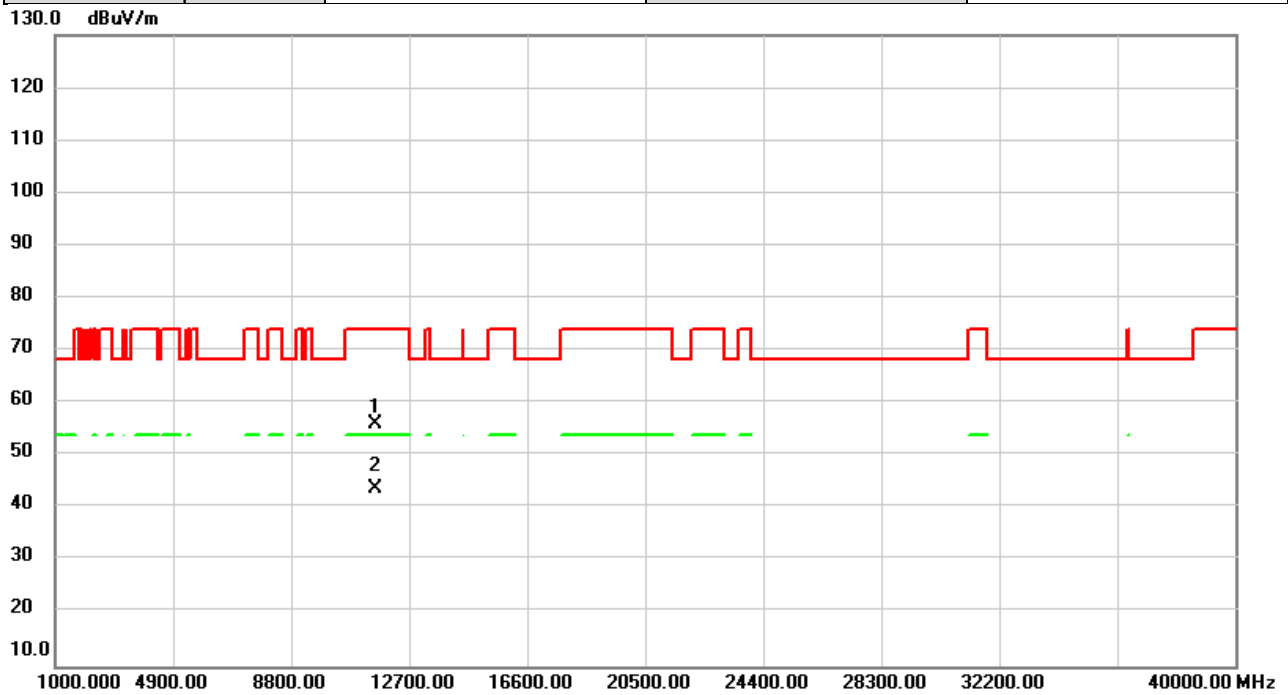


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	54.10	2.07	56.17	74.00	-17.83	peak	
2	*	11570.00	41.62	2.07	43.69	54.00	-10.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5785MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

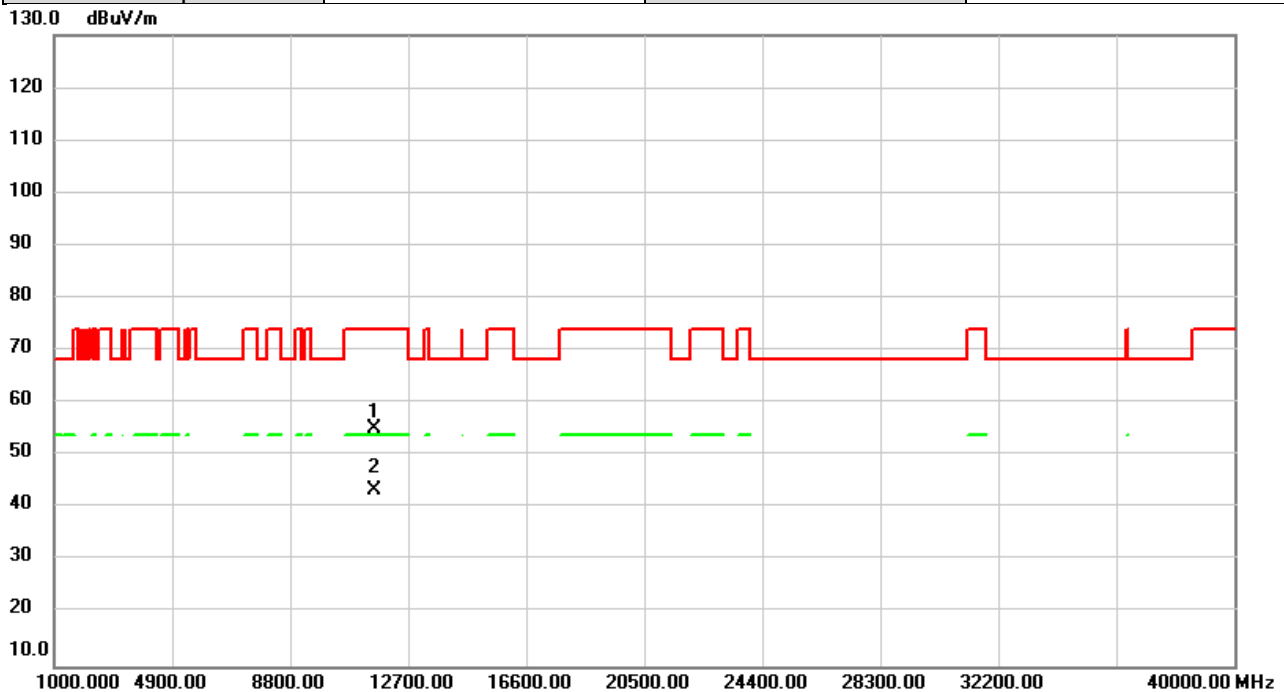


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	53.00	2.07	55.07	74.00	-18.93	peak	
2	*	11570.00	41.43	2.07	43.50	54.00	-10.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5825MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

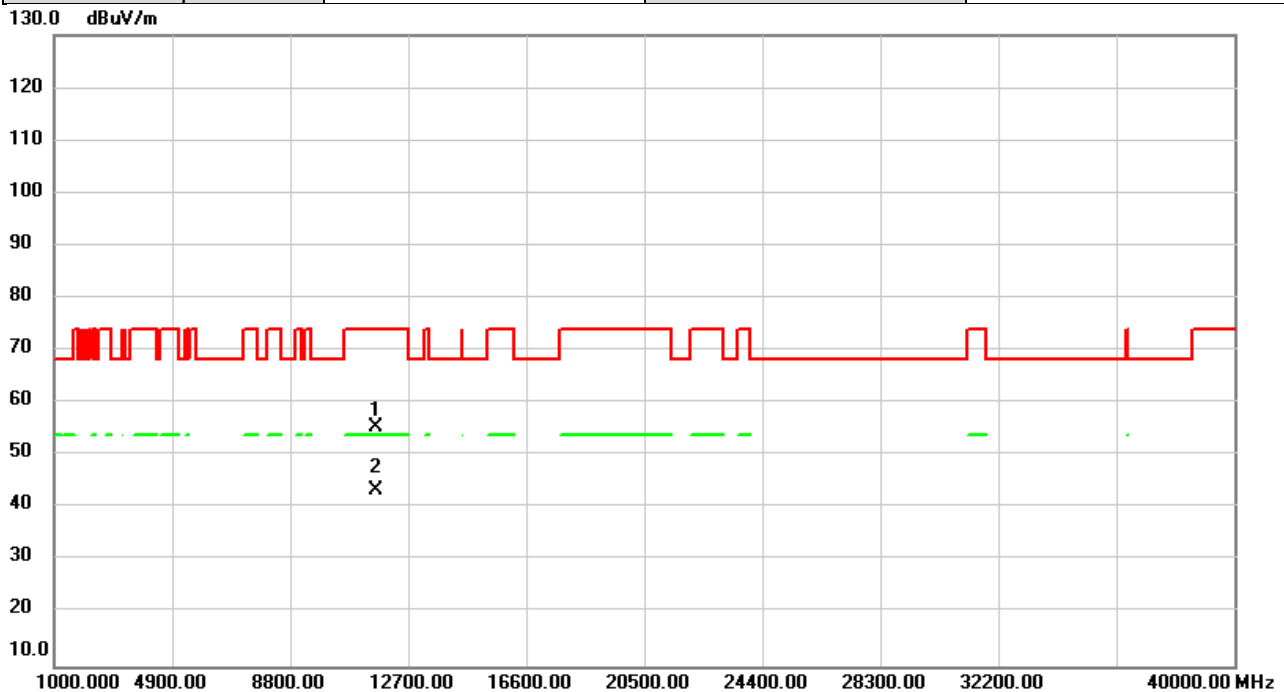


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	53.72	1.86	55.58	74.00	-18.42	peak	
2	*	11650.00	41.55	1.86	43.41	54.00	-10.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2021/12/9
Test Frequency	5825MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

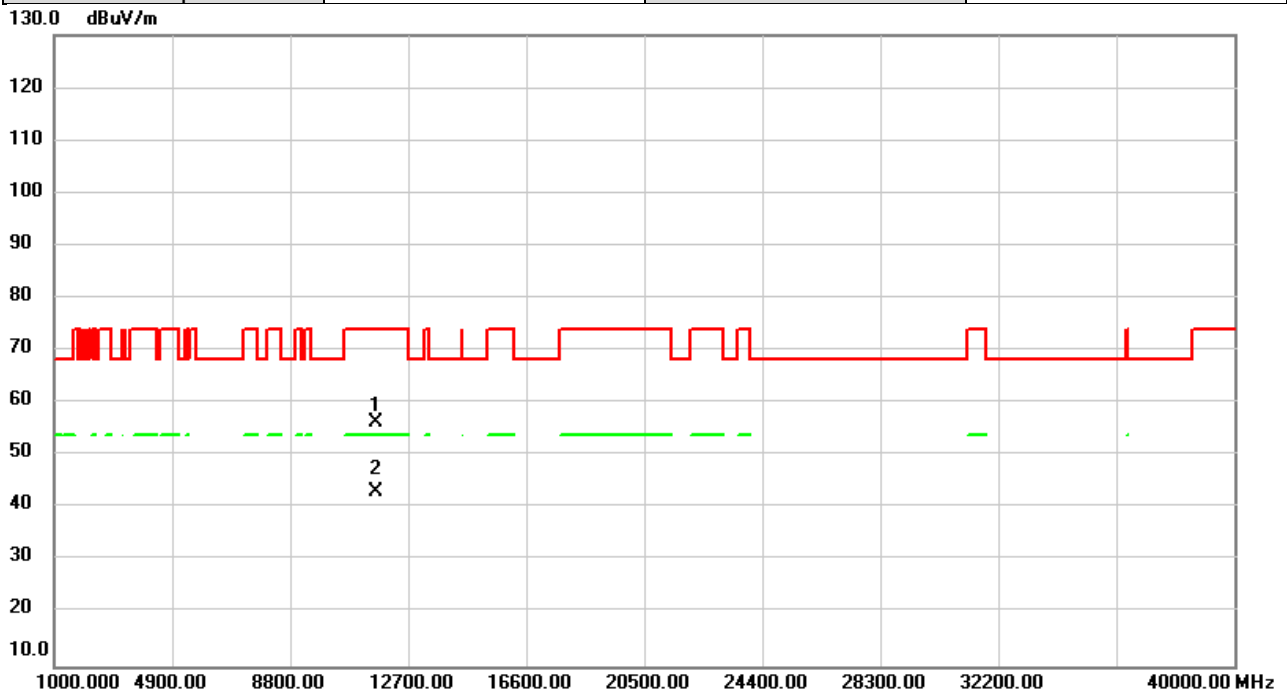


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	54.42	1.86	56.28	74.00	-17.72	peak	
2	*	11650.00	41.32	1.86	43.18	54.00	-10.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5180MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

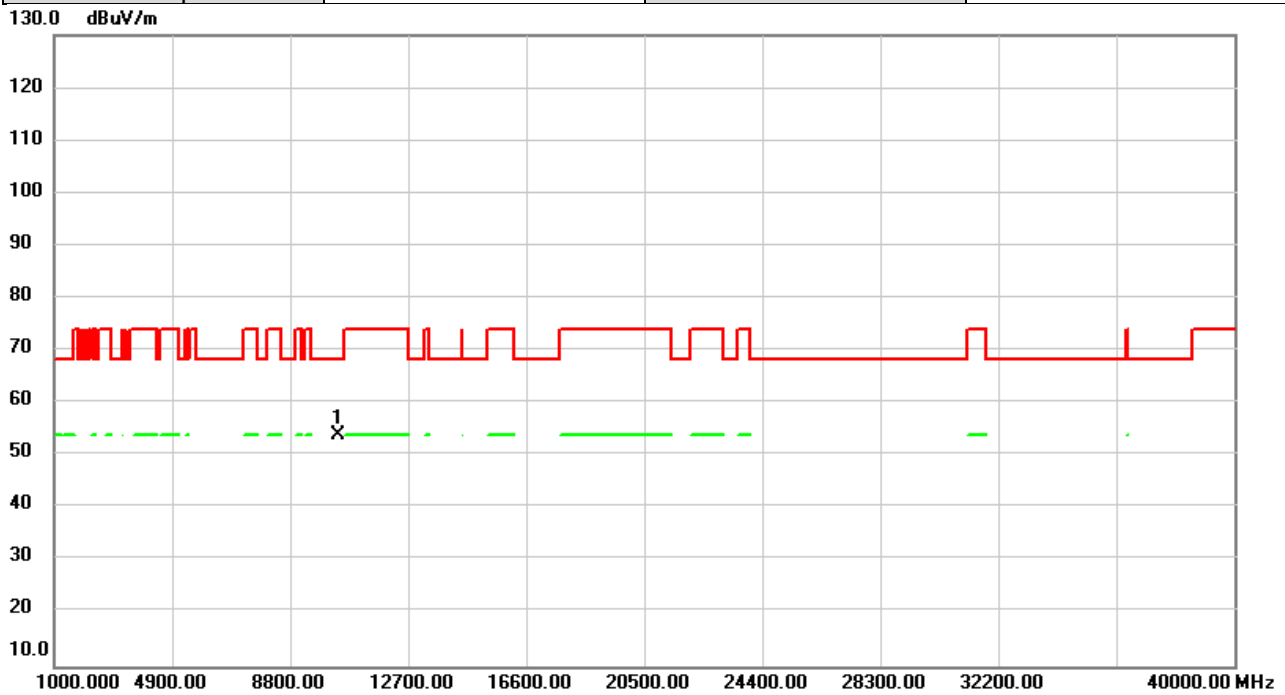


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	52.67	1.28	53.95	68.20	-14.25	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5180MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

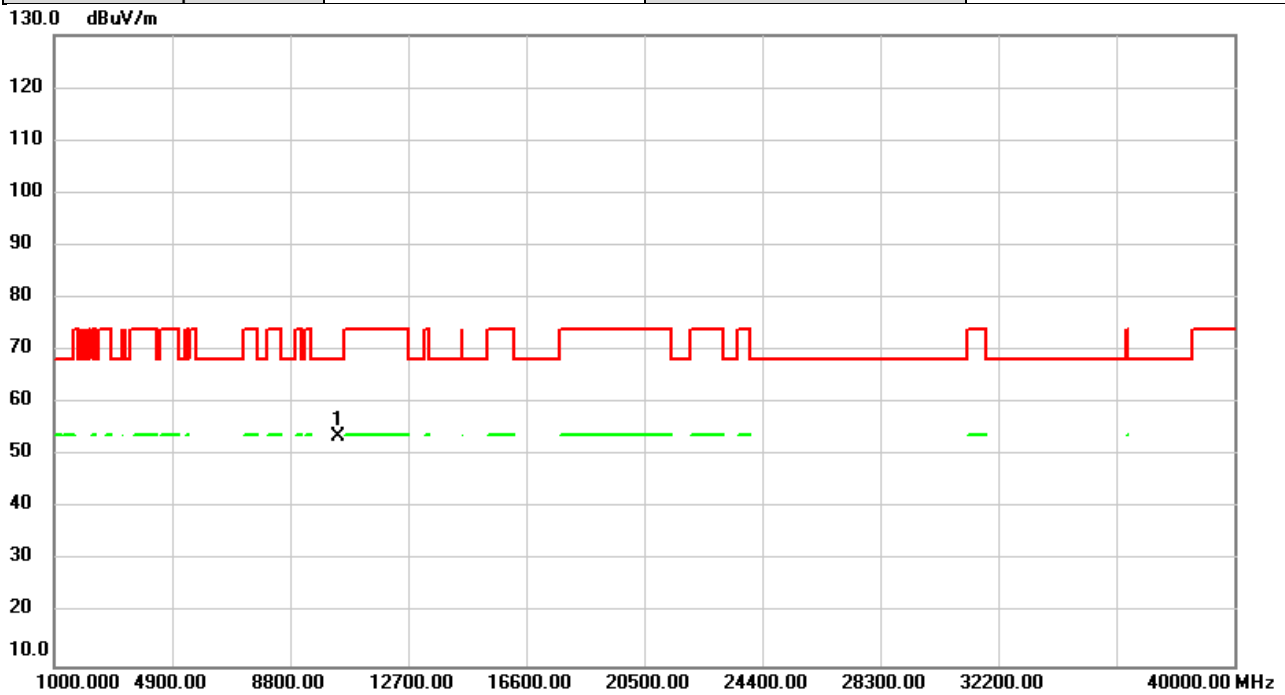


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	52.38	1.28	53.66	68.20	-14.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5200MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

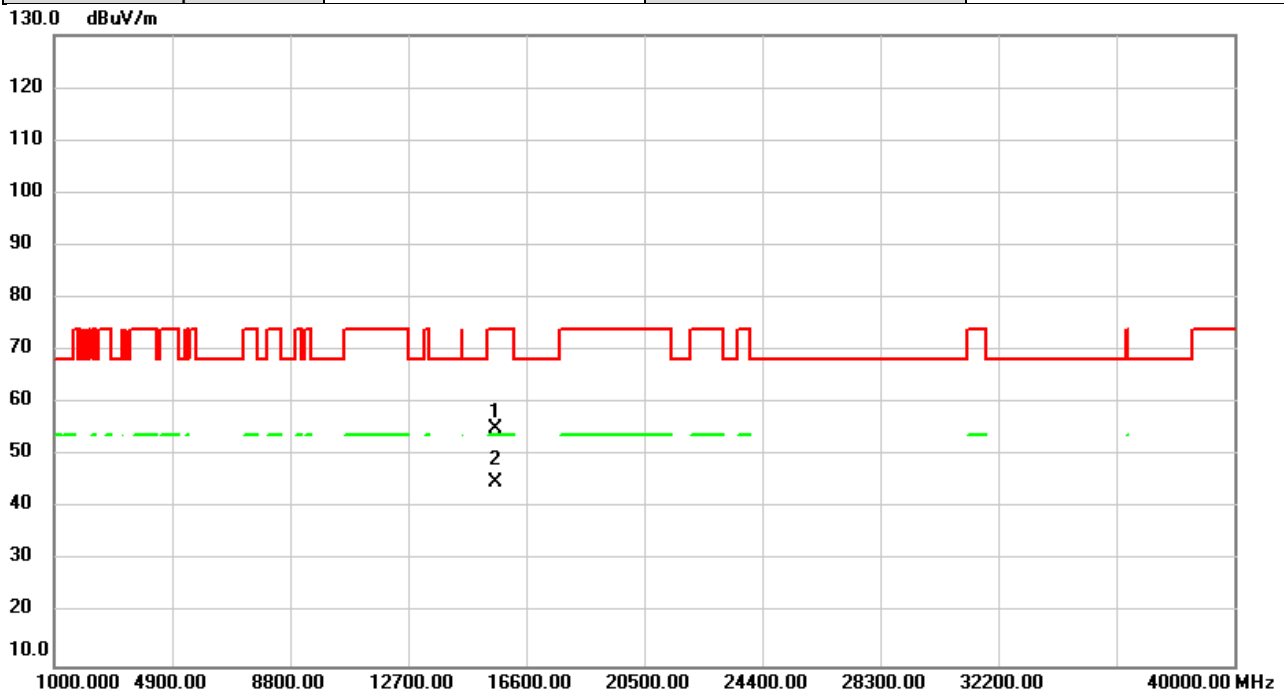


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15600.00	51.64	3.63	55.27	74.00	-18.73	peak	
2	*	15600.00	41.45	3.63	45.08	54.00	-8.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5200MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

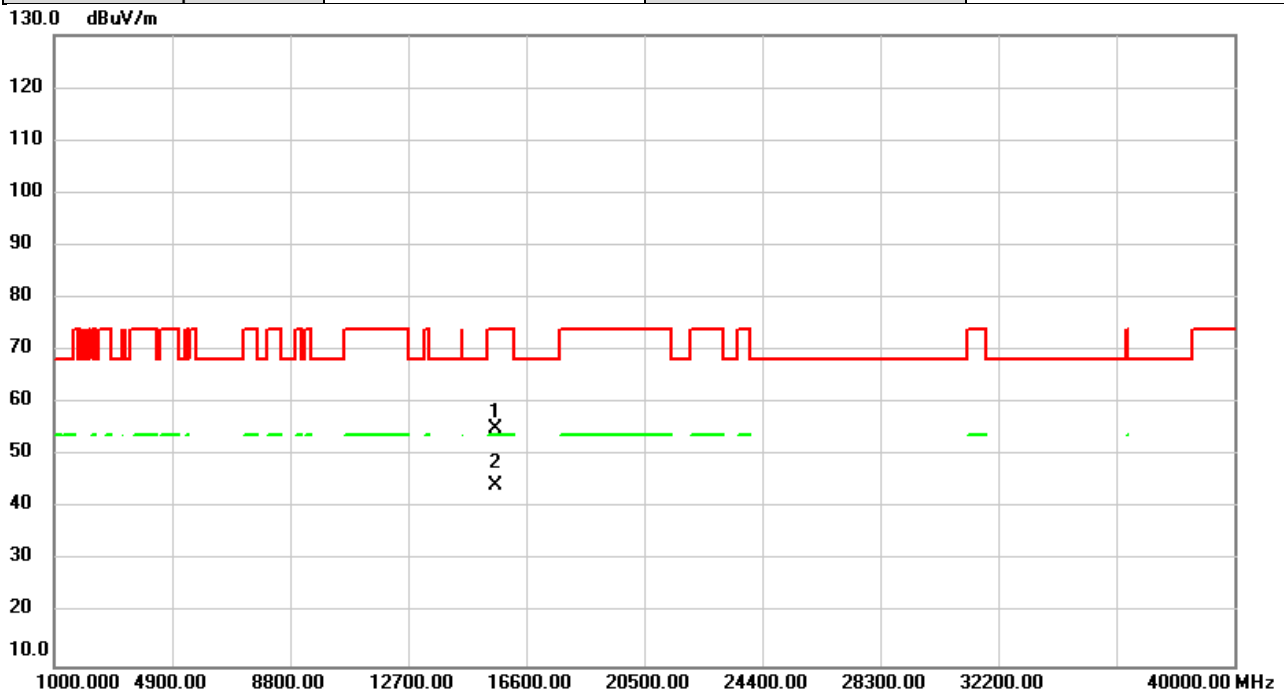


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15600.00	51.48	3.63	55.11	74.00	-18.89	peak	
2	*	15600.00	40.77	3.63	44.40	54.00	-9.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5240MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

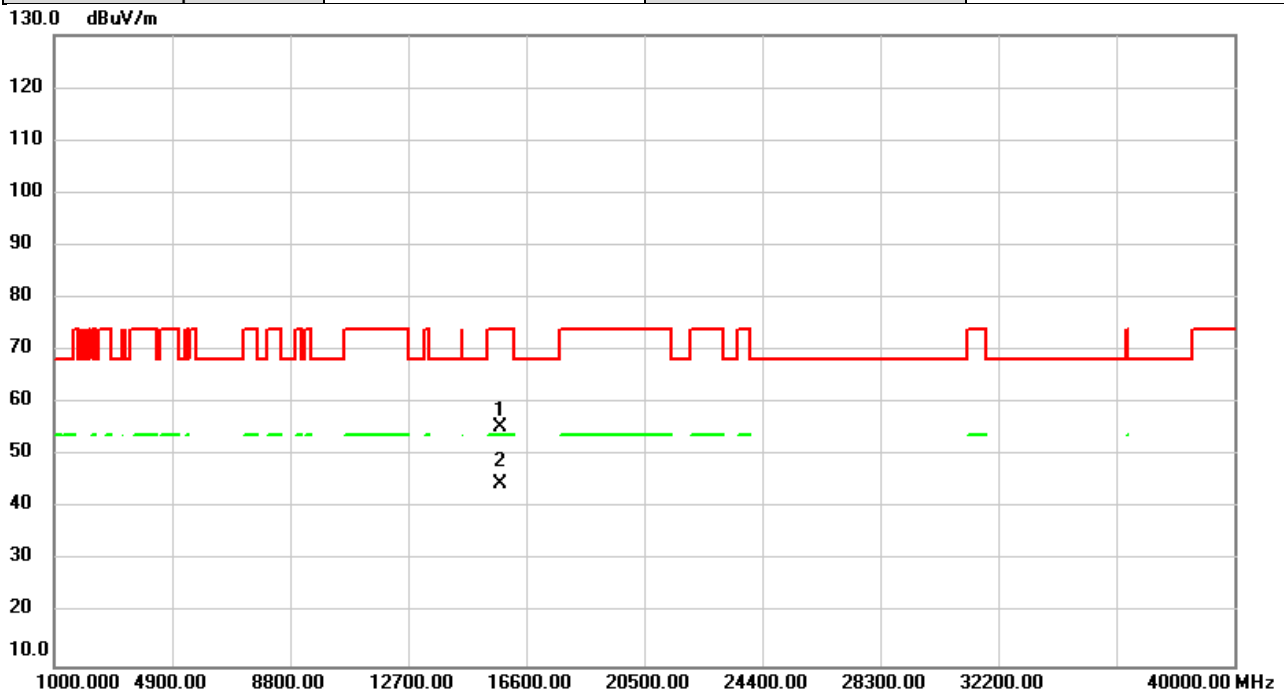


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15720.00	52.02	3.45	55.47	74.00	-18.53	peak	
2	*	15720.00	41.18	3.45	44.63	54.00	-9.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5240MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

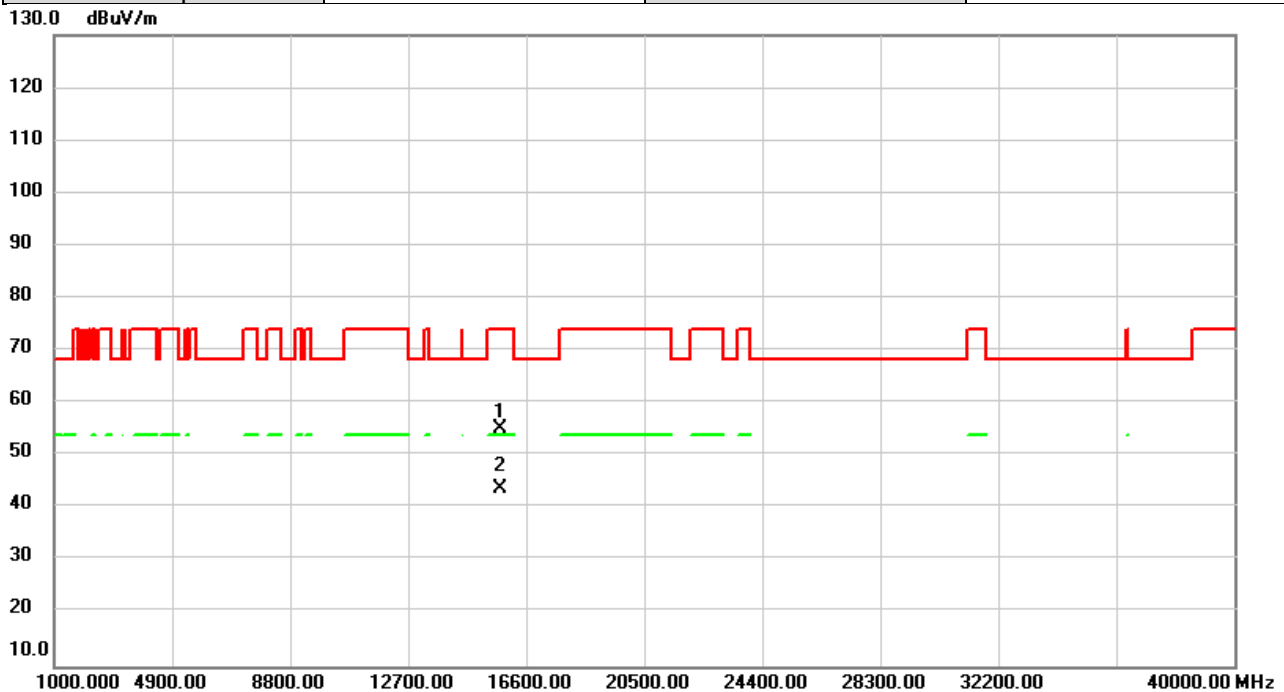


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15720.00	51.68	3.45	55.13	74.00	-18.87	peak	
2	*	15720.00	40.34	3.45	43.79	54.00	-10.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5260MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

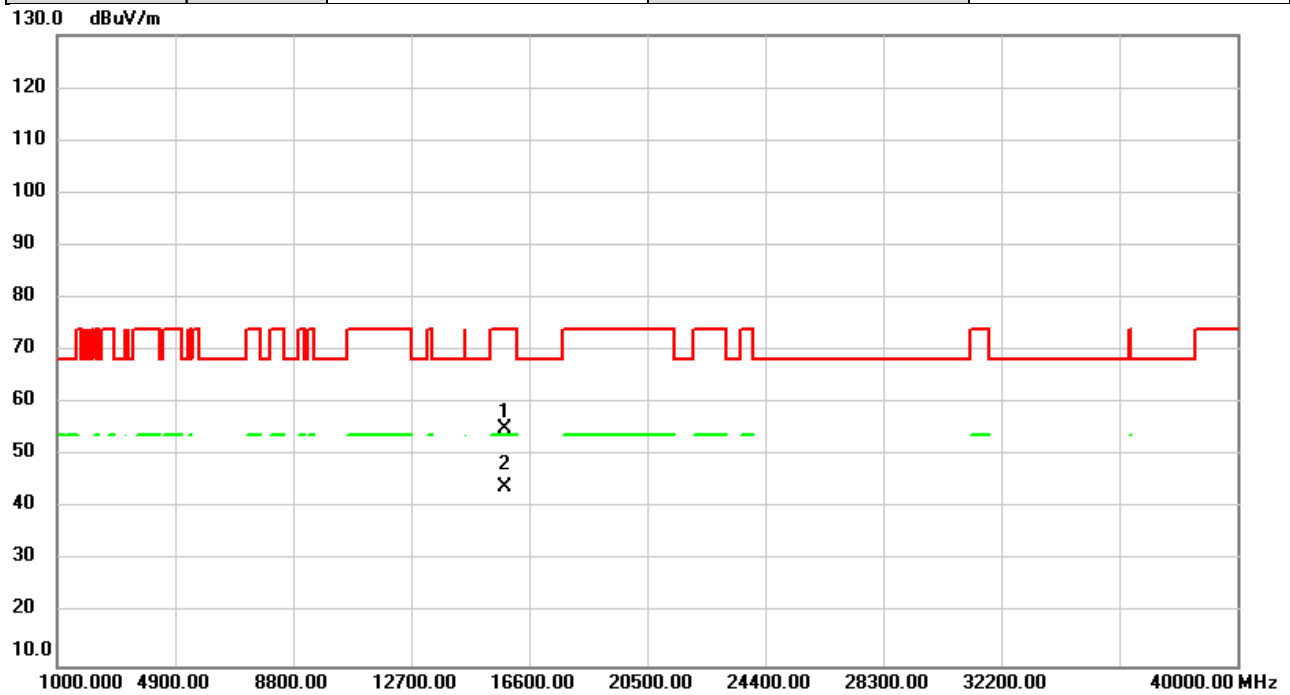


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15780.00	51.71	3.37	55.08	74.00	-18.92	peak	
2	*	15780.00	40.71	3.37	44.08	54.00	-9.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5260MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

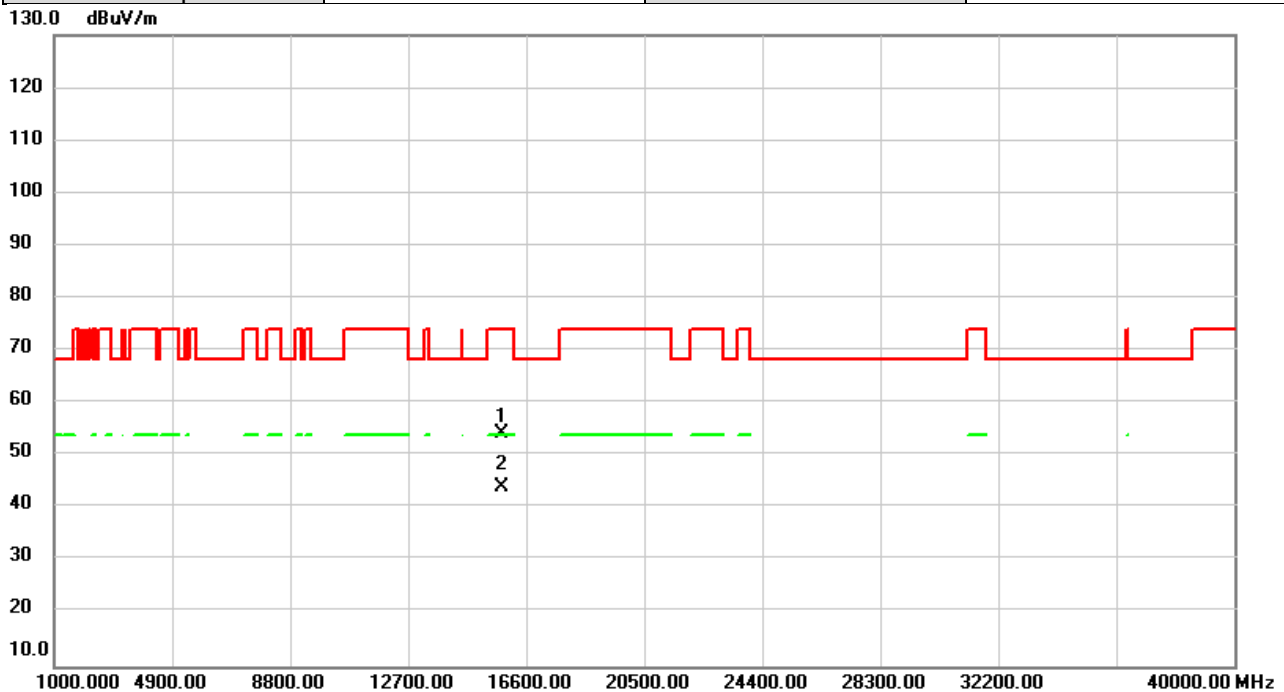


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15780.00	50.93	3.37	54.30	74.00	-19.70	peak	
2	*	15780.00	40.70	3.37	44.07	54.00	-9.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5300MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

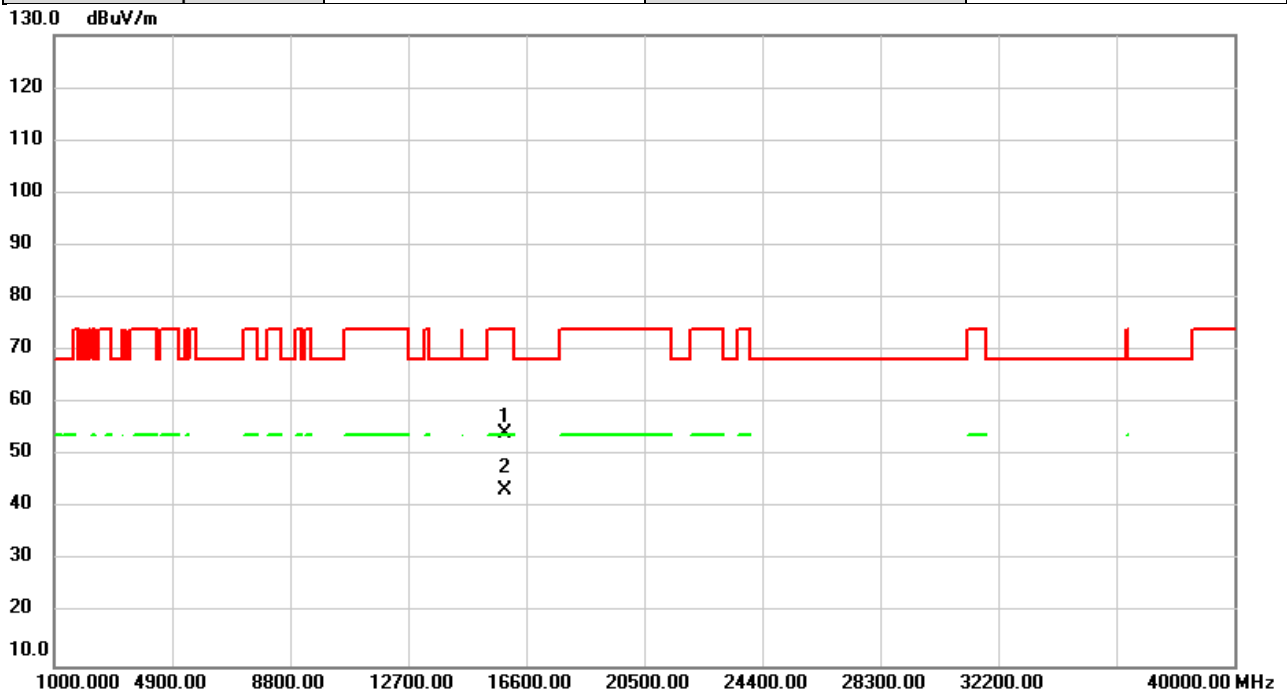


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15900.00	51.16	3.19	54.35	74.00	-19.65	peak	
2	*	15900.00	40.30	3.19	43.49	54.00	-10.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5300MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

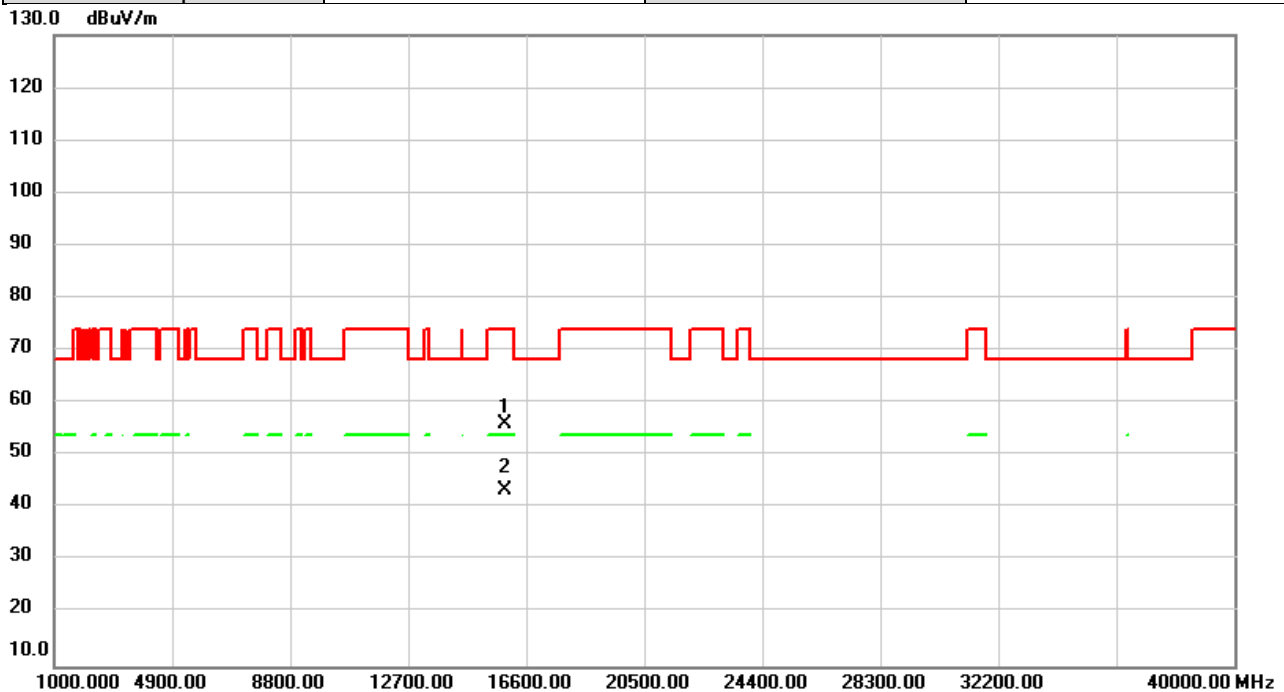


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15900.00	52.95	3.19	56.14	74.00	-17.86	peak	
2	*	15900.00	40.21	3.19	43.40	54.00	-10.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5320MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

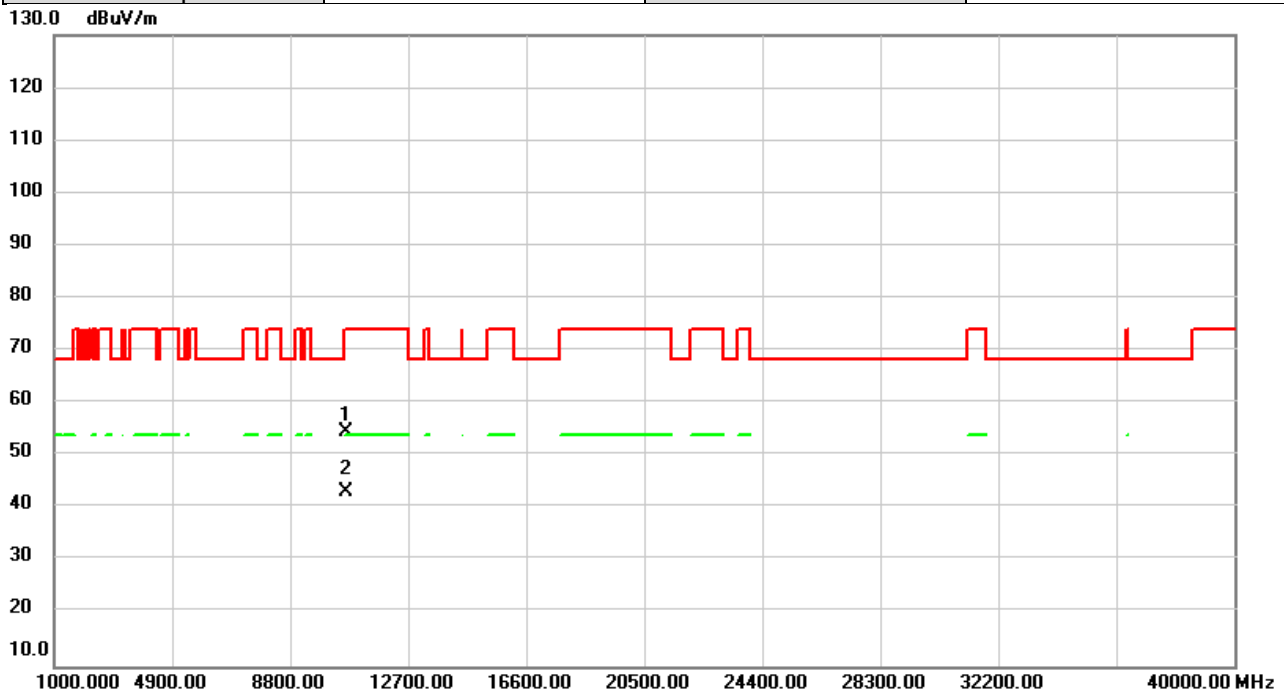


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	52.47	2.07	54.54	74.00	-19.46	peak	
2	*	10640.00	41.20	2.07	43.27	54.00	-10.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5320MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

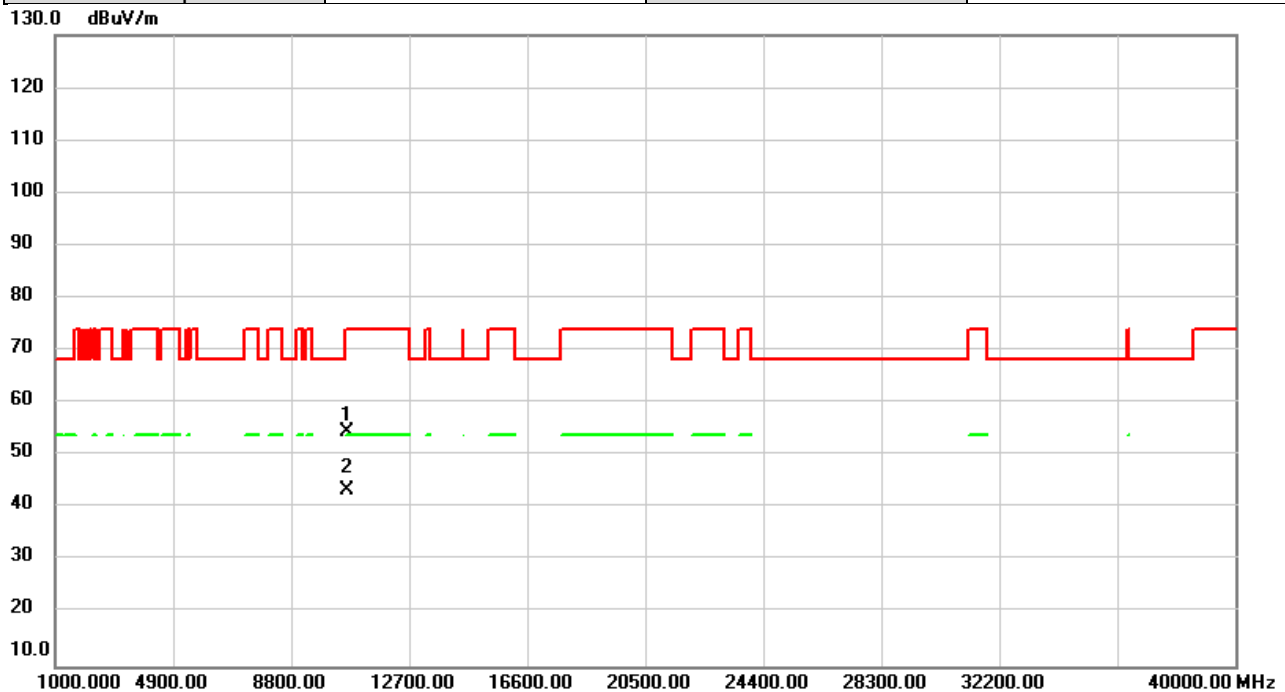


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	52.41	2.07	54.48	74.00	-19.52	peak	
2	*	10640.00	41.29	2.07	43.36	54.00	-10.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5500MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

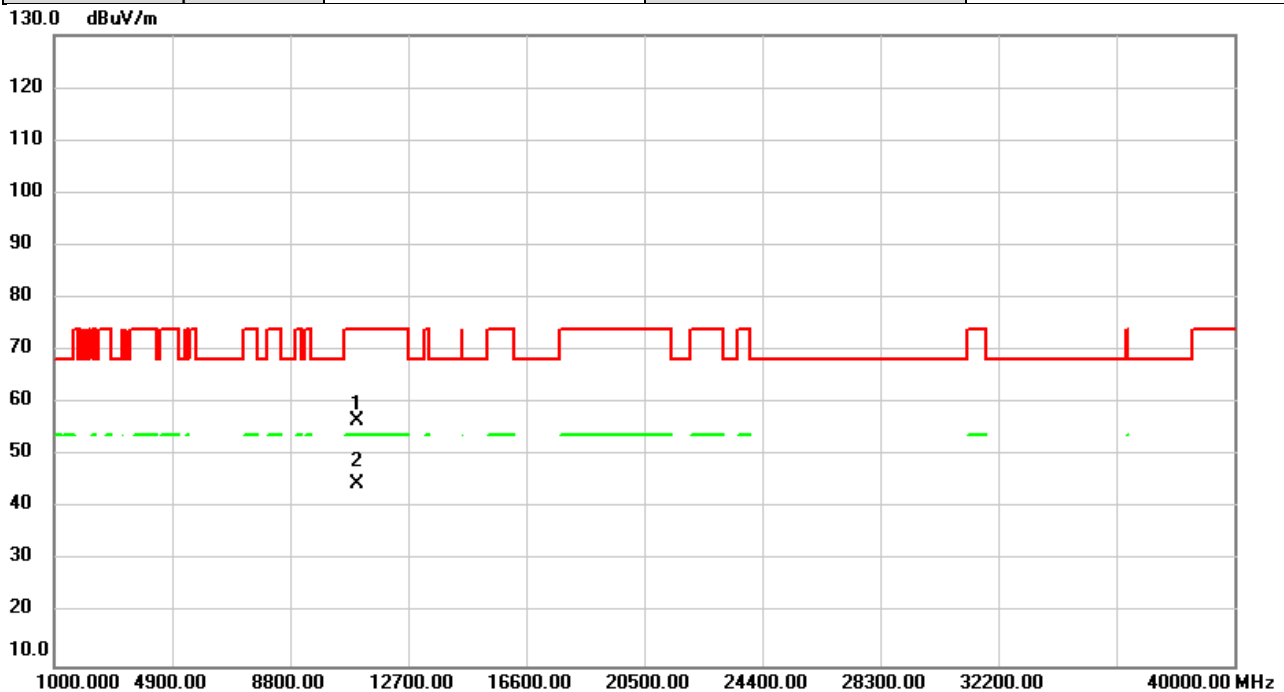


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	53.25	3.27	56.52	74.00	-17.48	peak	
2	*	11000.00	41.28	3.27	44.55	54.00	-9.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5500MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

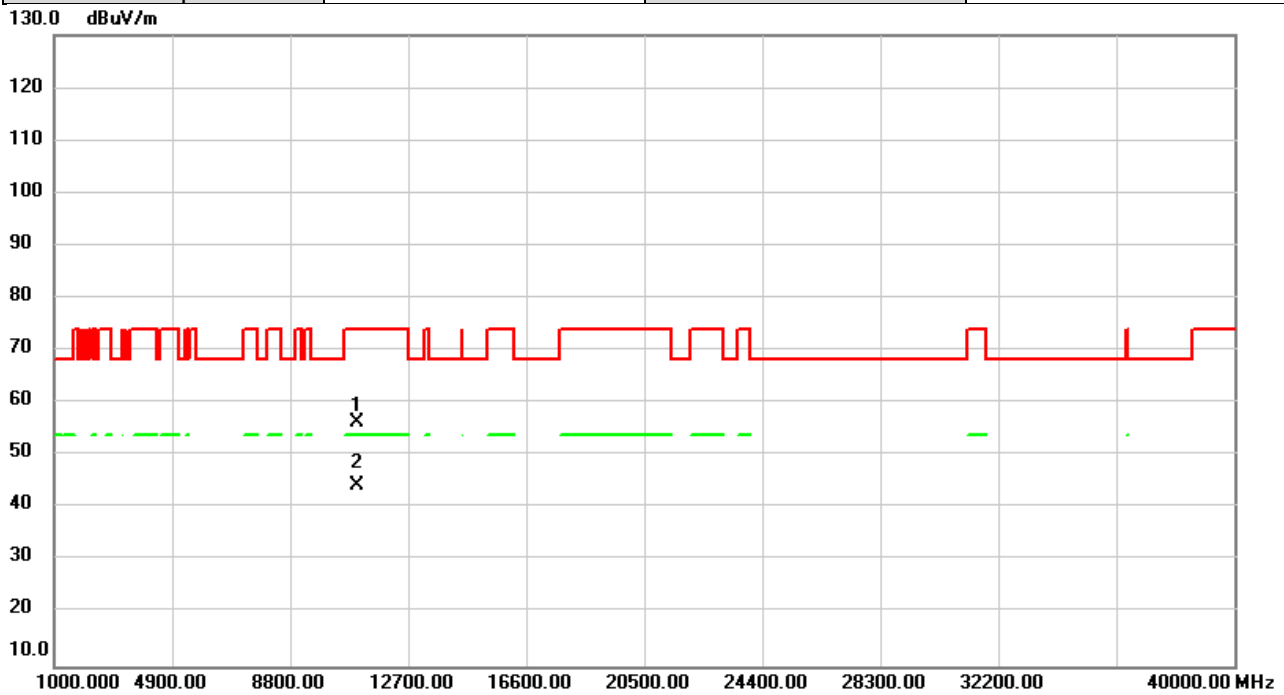


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	52.93	3.27	56.20	74.00	-17.80	peak	
2	*	11000.00	41.19	3.27	44.46	54.00	-9.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5580MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

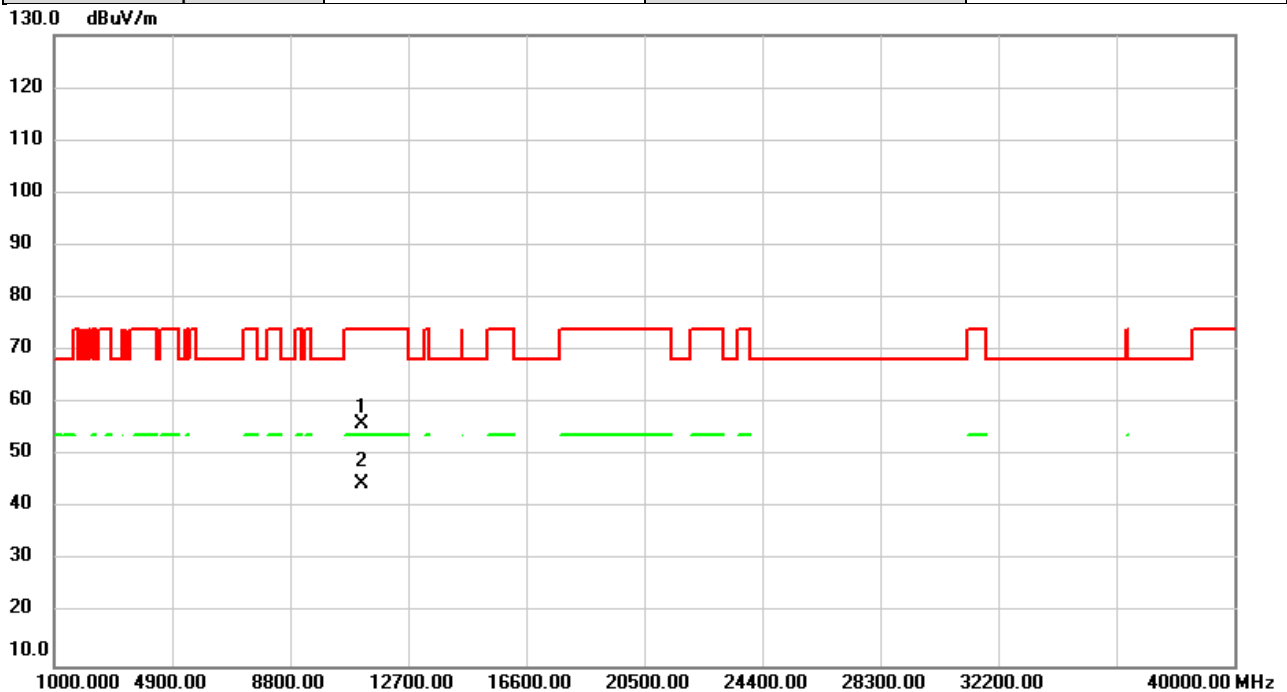


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	53.03	2.93	55.96	74.00	-18.04	peak	
2	*	11160.00	41.69	2.93	44.62	54.00	-9.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5580MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

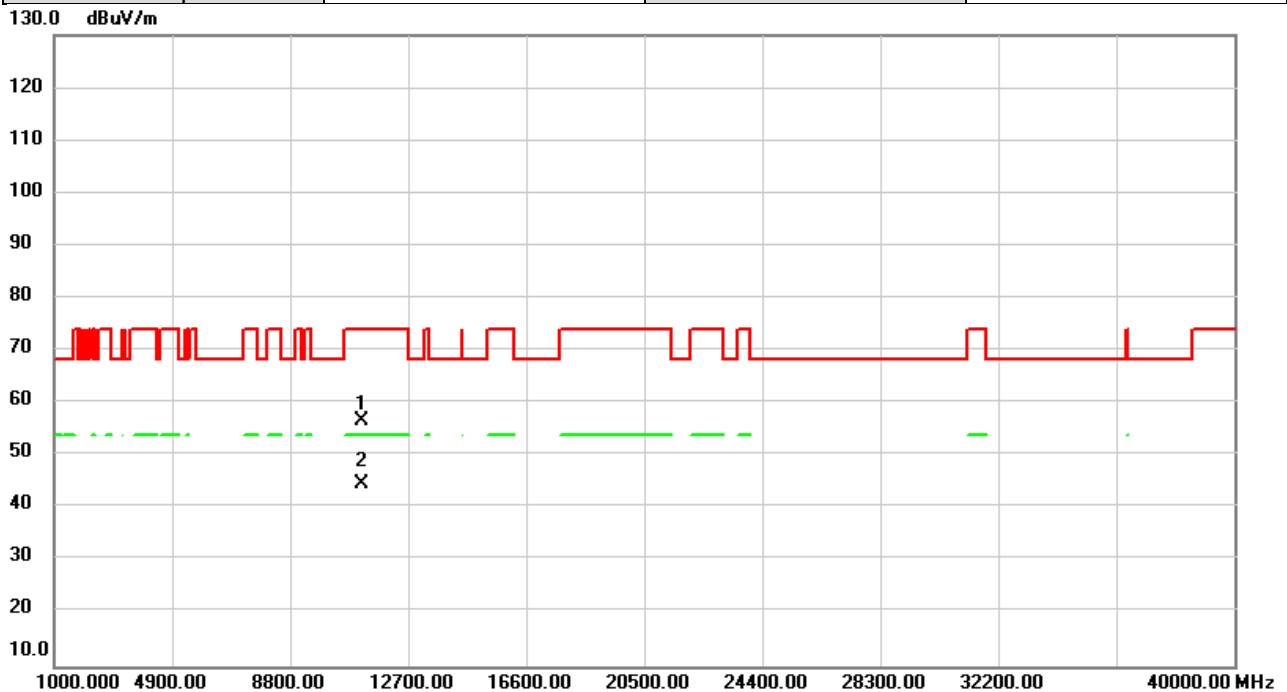


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	53.62	2.93	56.55	74.00	-17.45	peak	
2	*	11160.00	41.69	2.93	44.62	54.00	-9.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5700MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

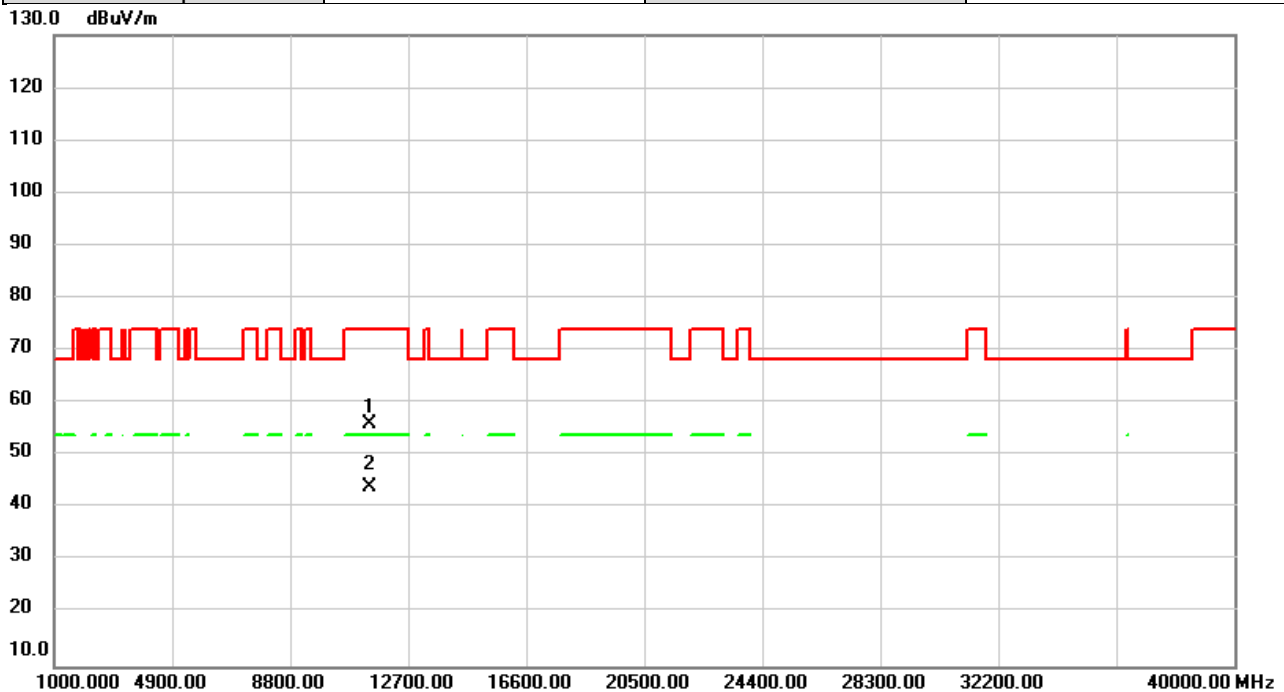


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	53.47	2.44	55.91	74.00	-18.09	peak	
2	*	11400.00	41.67	2.44	44.11	54.00	-9.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5700MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

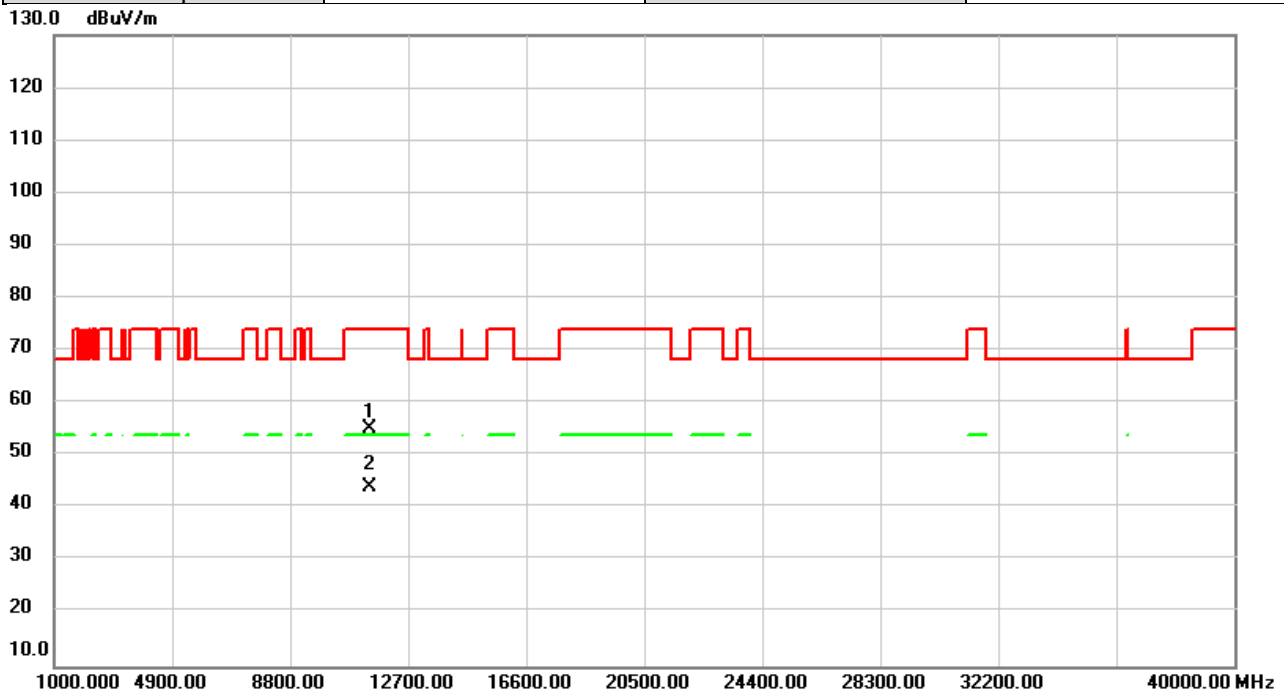


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	52.61	2.44	55.05	74.00	-18.95	peak	
2	*	11400.00	41.49	2.44	43.93	54.00	-10.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5720MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

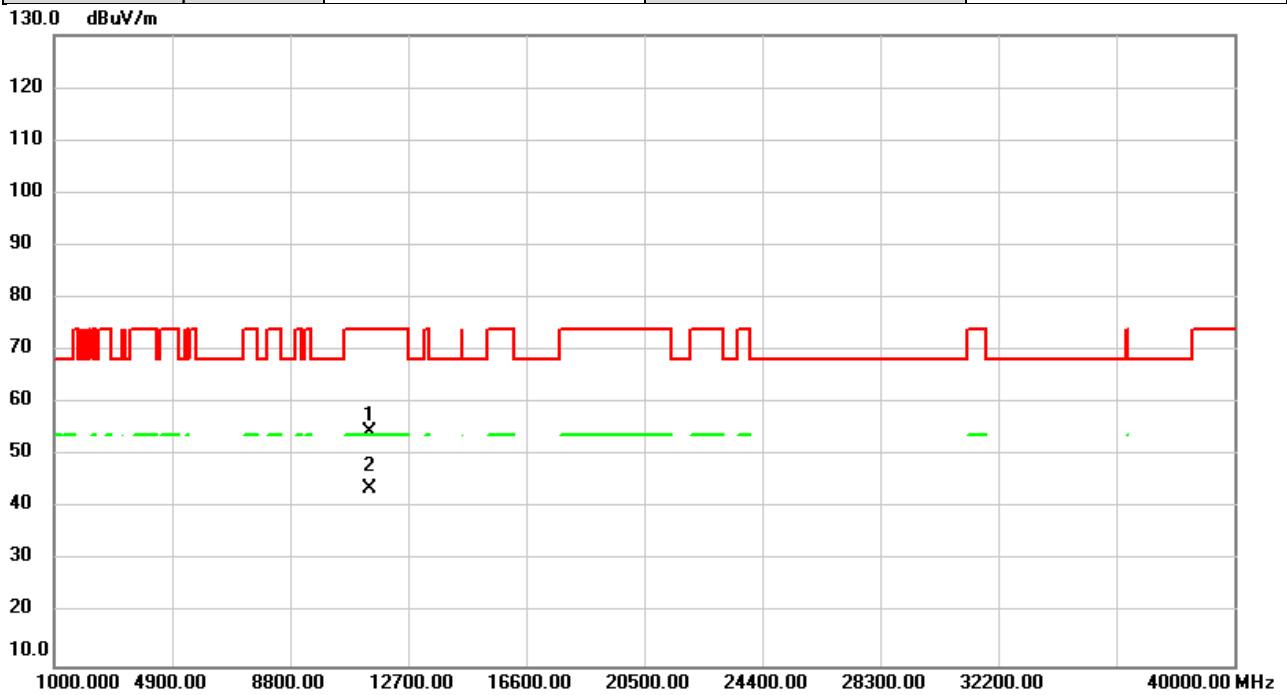


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	52.31	2.36	54.67	74.00	-19.33	peak	
2	*	11440.00	41.50	2.36	43.86	54.00	-10.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5720MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

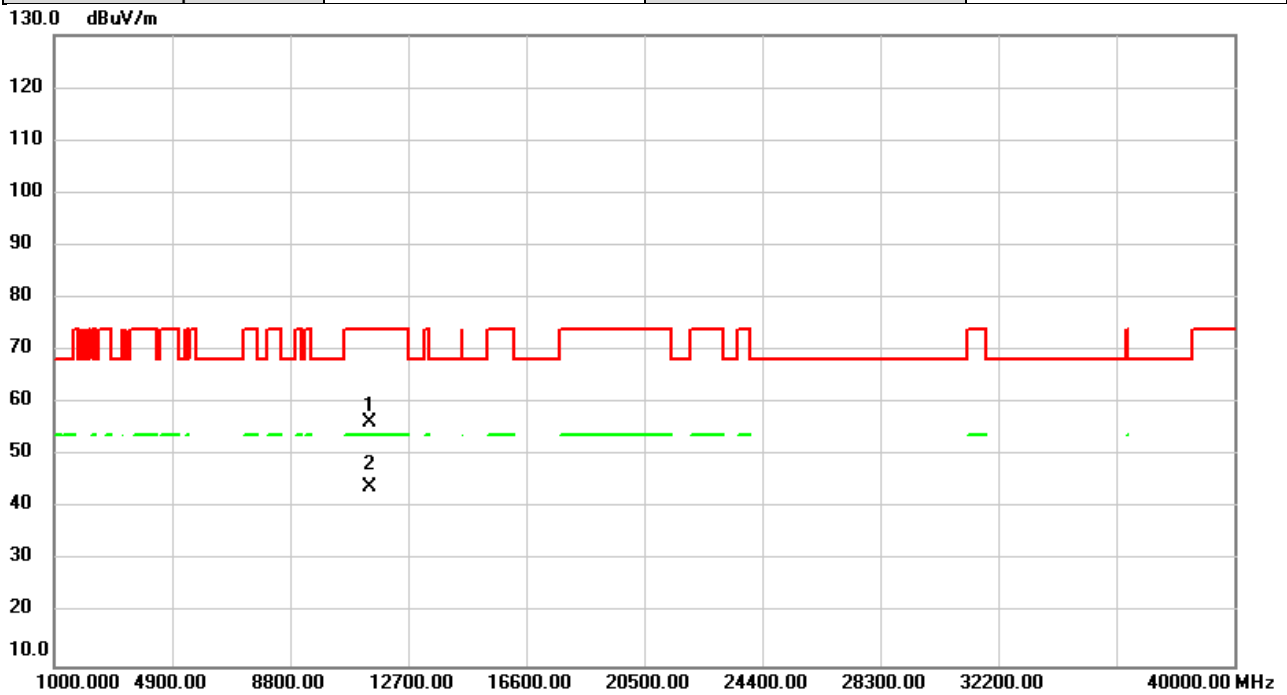


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	53.95	2.36	56.31	74.00	-17.69	peak	
2	*	11440.00	41.55	2.36	43.91	54.00	-10.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5745MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

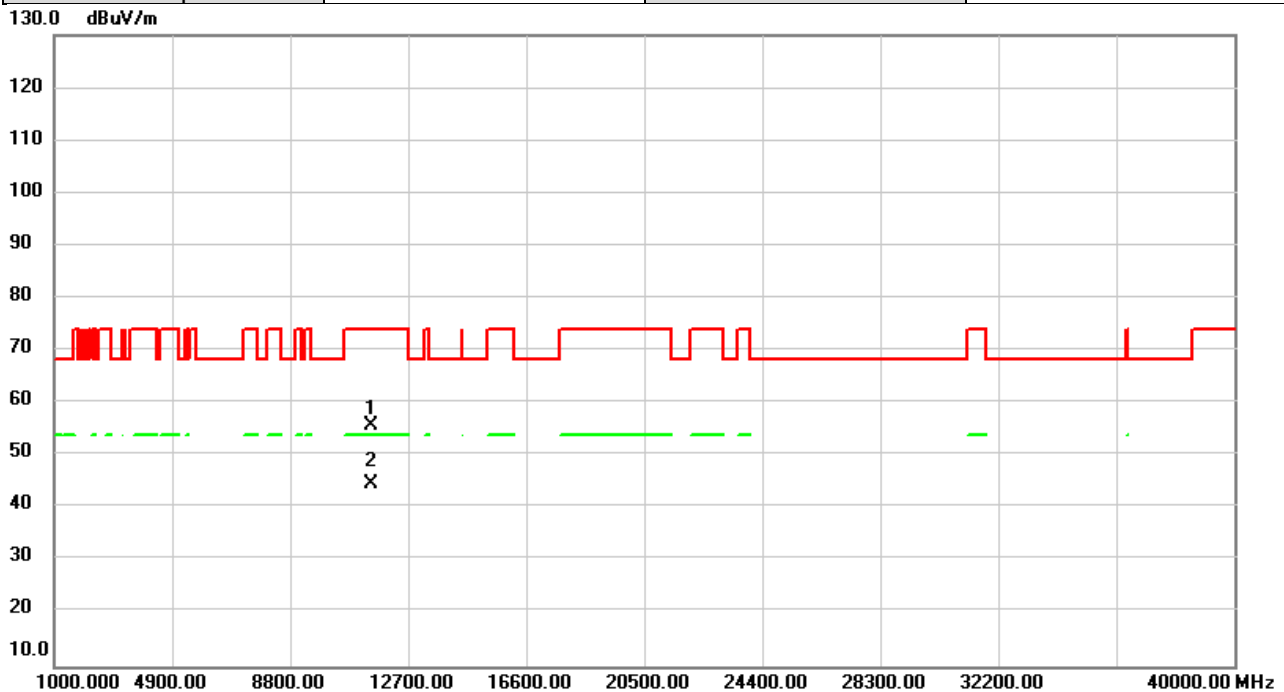


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	53.57	2.26	55.83	74.00	-18.17	peak	
2	*	11490.00	42.39	2.26	44.65	54.00	-9.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5745MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

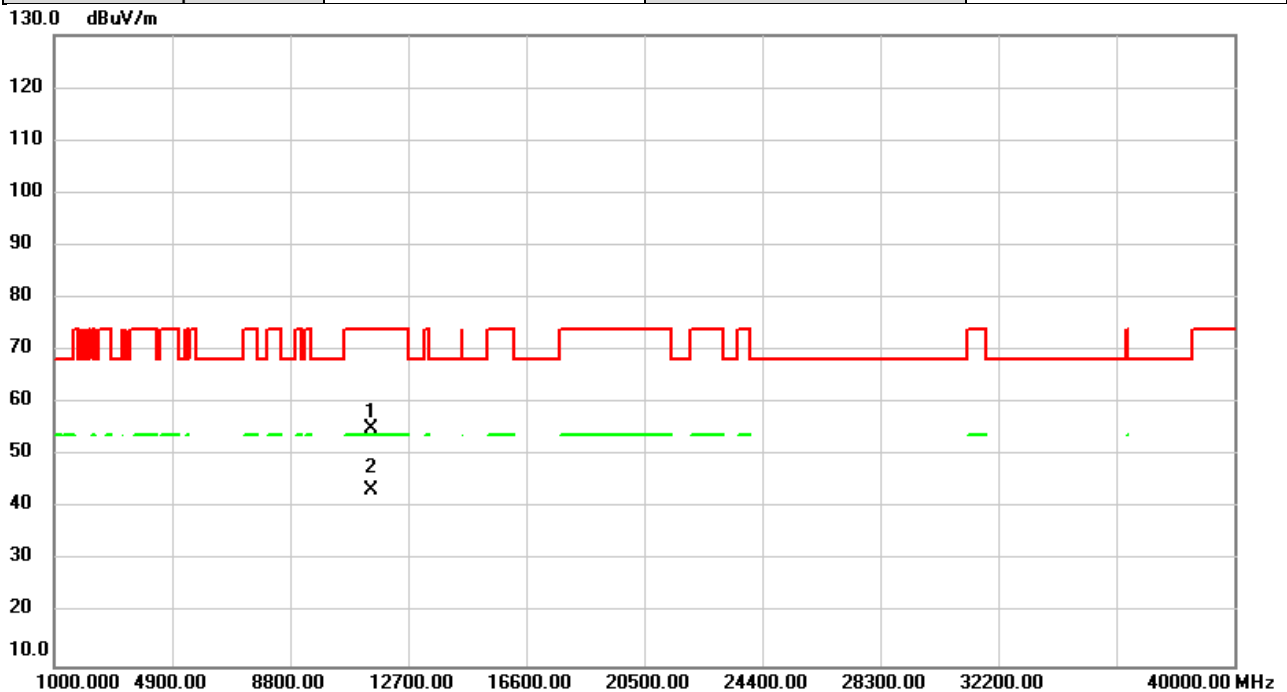


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	52.95	2.26	55.21	74.00	-18.79	peak	
2	*	11490.00	41.31	2.26	43.57	54.00	-10.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5785MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

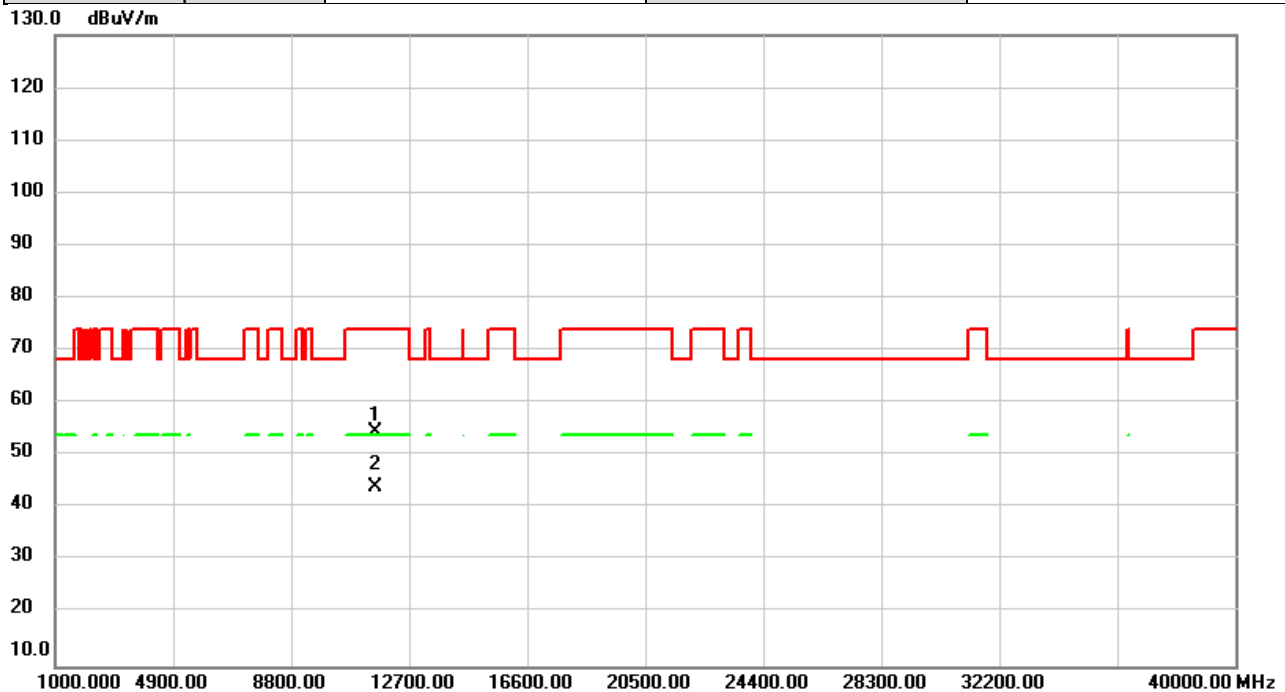


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	52.59	2.07	54.66	74.00	-19.34	peak	
2	*	11570.00	42.03	2.07	44.10	54.00	-9.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5785MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

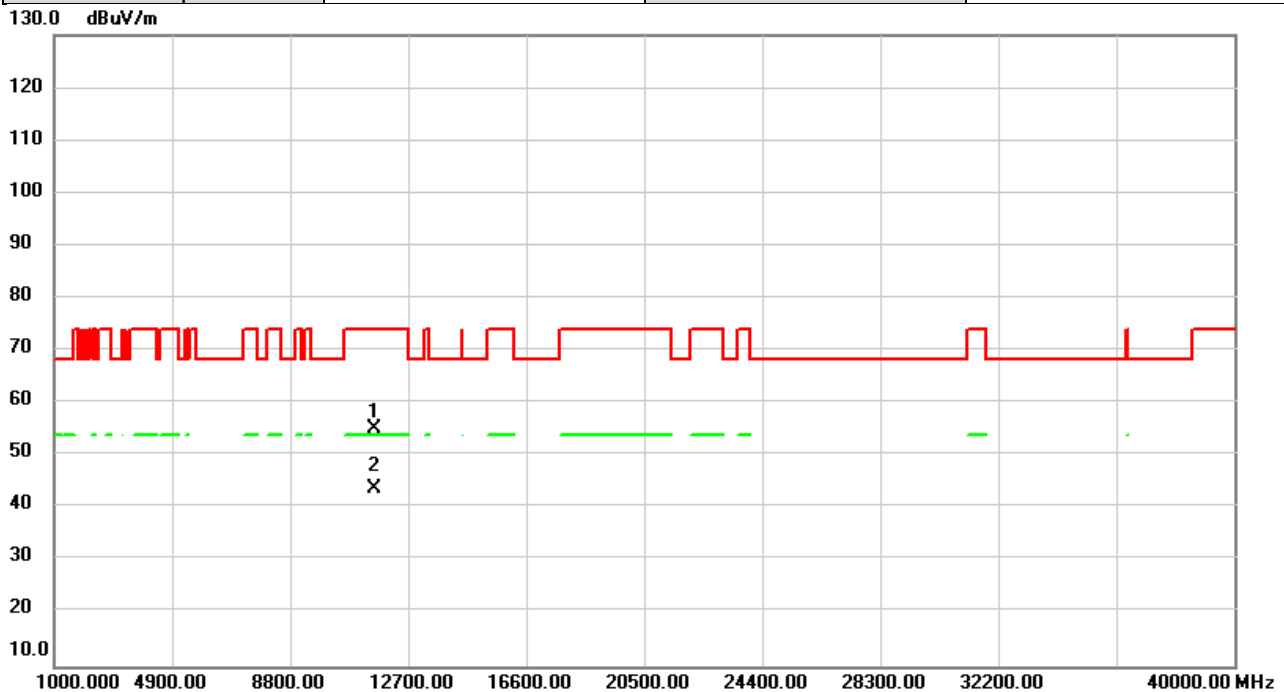


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	53.12	2.07	55.19	74.00	-18.81	peak	
2	*	11570.00	41.60	2.07	43.67	54.00	-10.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5825MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

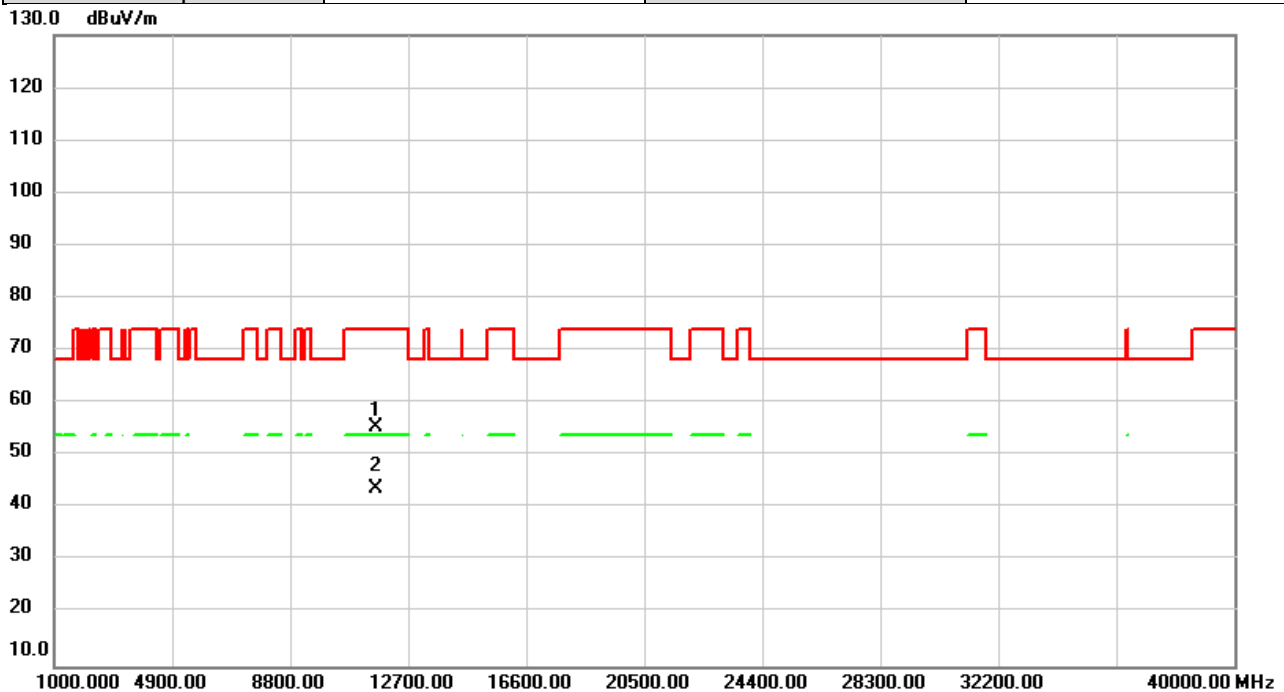


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	53.55	1.86	55.41	74.00	-18.59	peak	
2	*	11650.00	41.99	1.86	43.85	54.00	-10.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2021/12/9
Test Frequency	5825MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

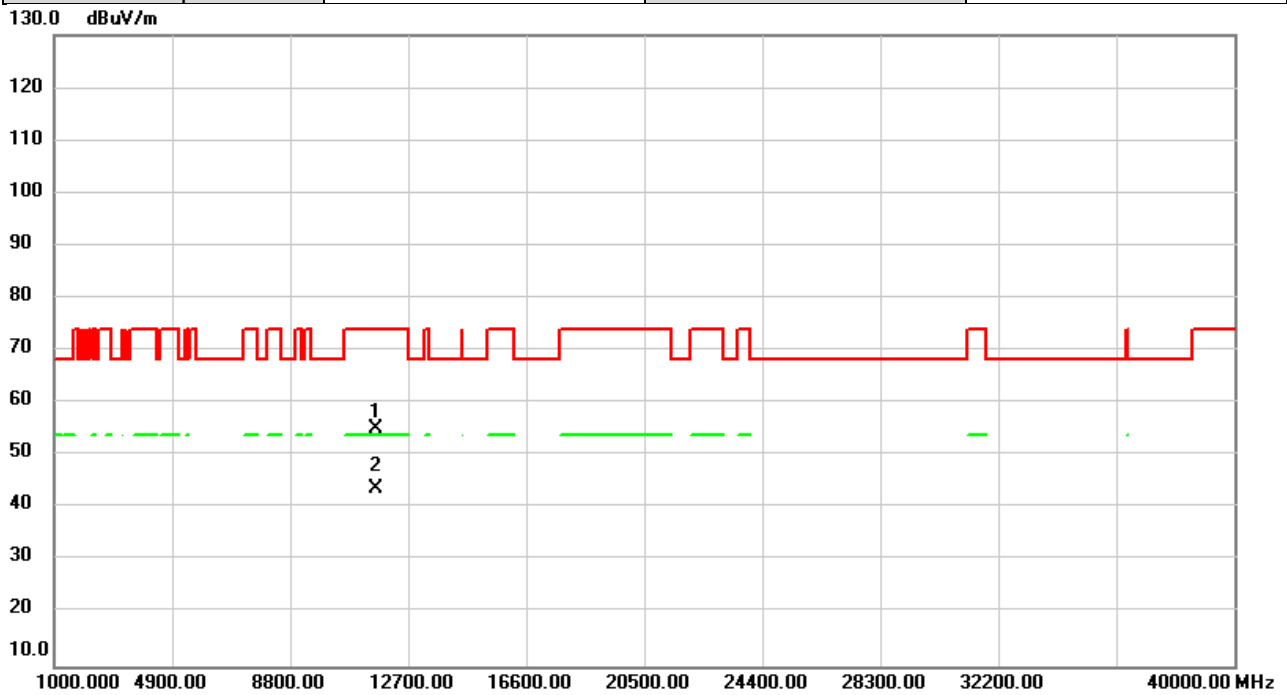


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	53.30	1.86	55.16	74.00	-18.84	peak	
2	*	11650.00	41.74	1.86	43.60	54.00	-10.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5190MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

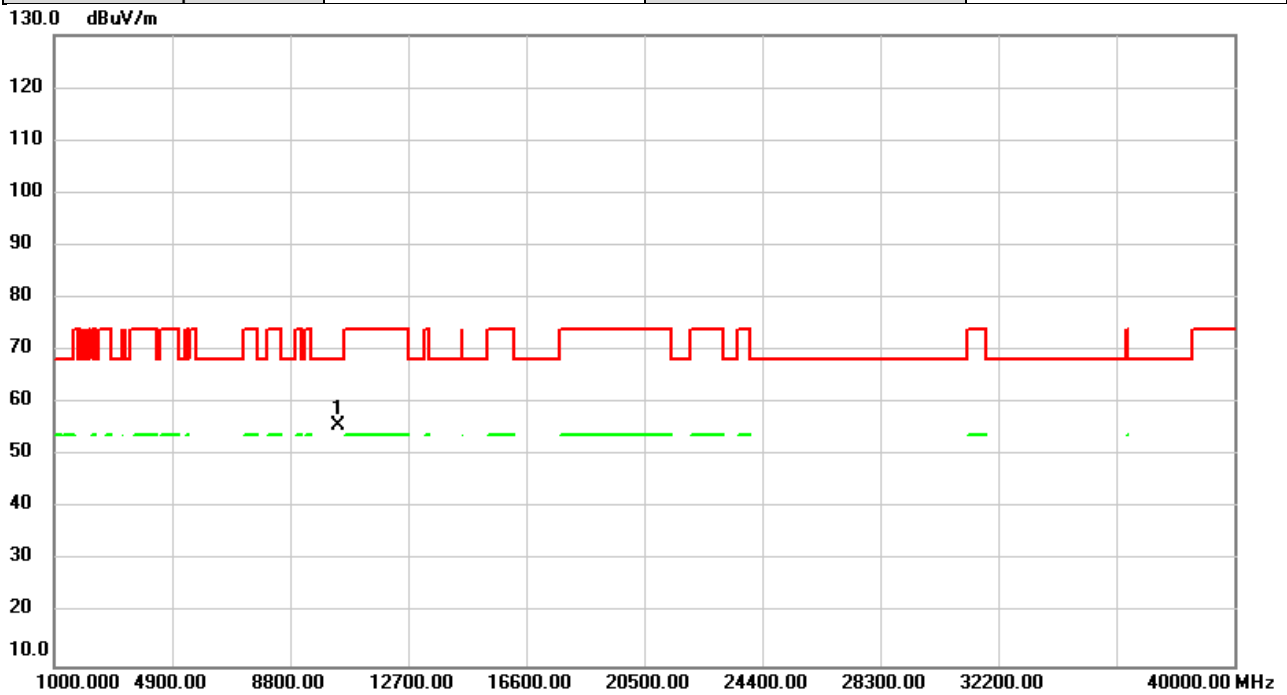


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	54.51	1.33	55.84	68.20	-12.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5190MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

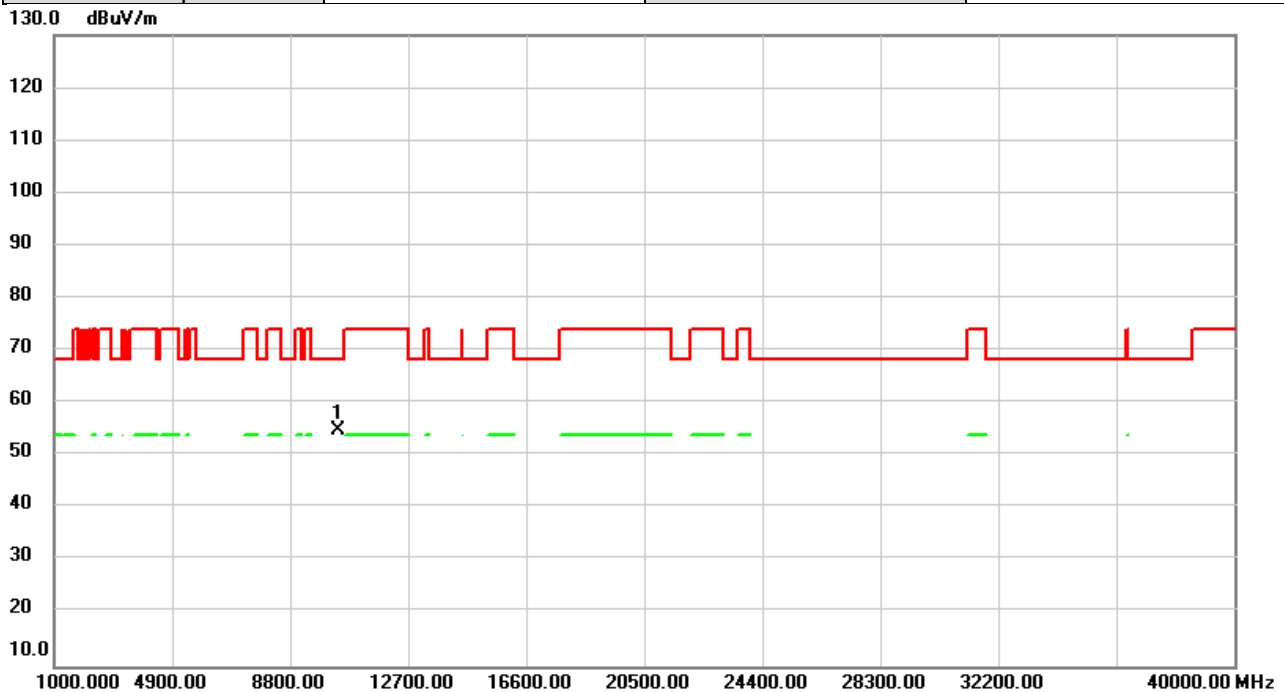


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	53.39	1.33	54.72	68.20	-13.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5230MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

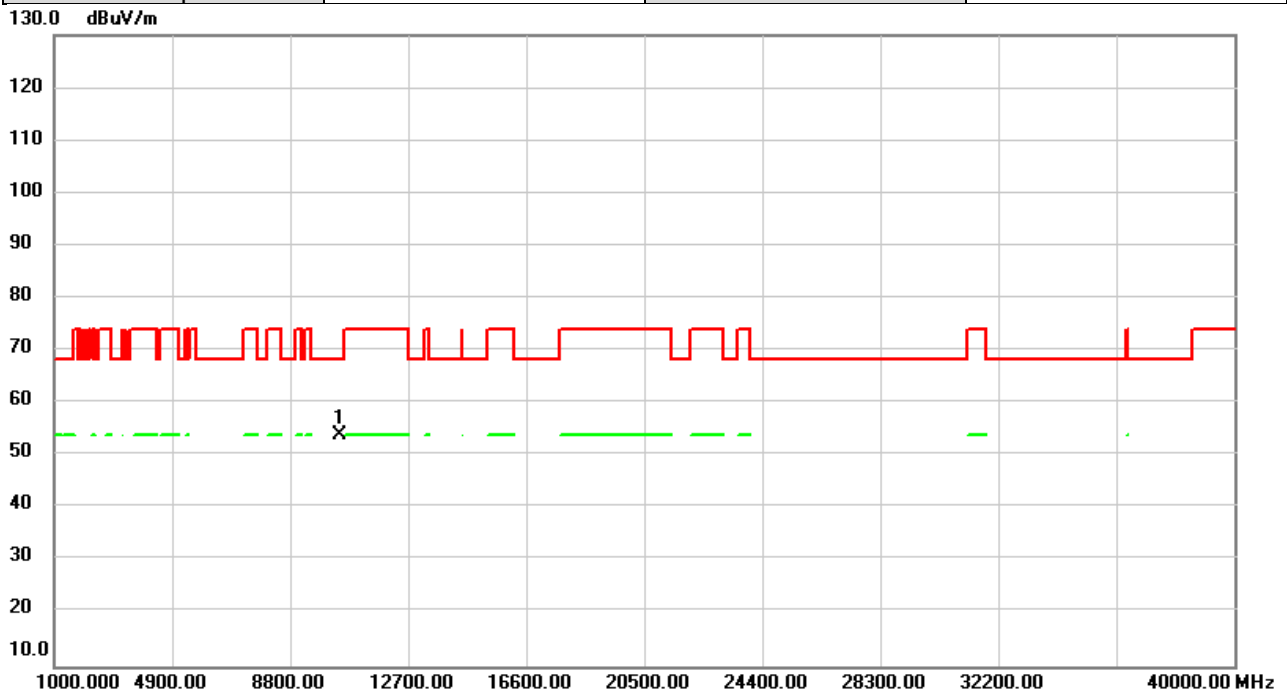


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	52.54	1.51	54.05	68.20	-14.15	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5230MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

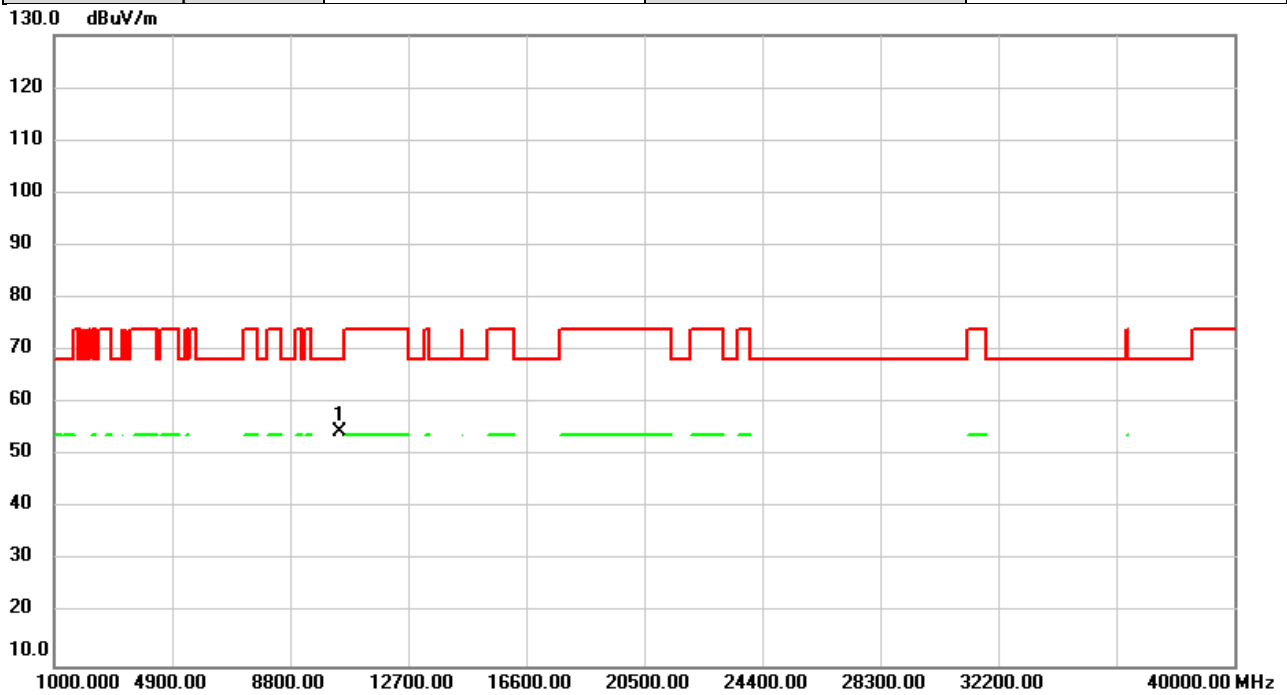


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	52.98	1.51	54.49	68.20	-13.71	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5270MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

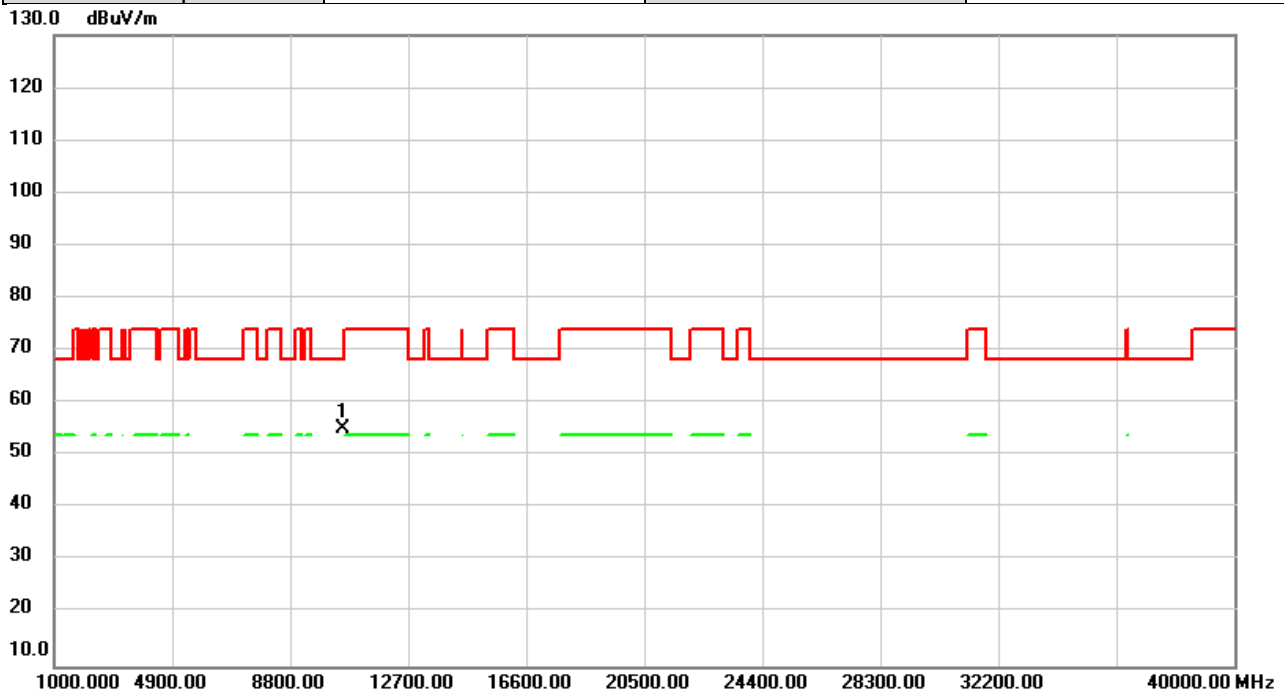


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	53.53	1.73	55.26	68.20	-12.94	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5270MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

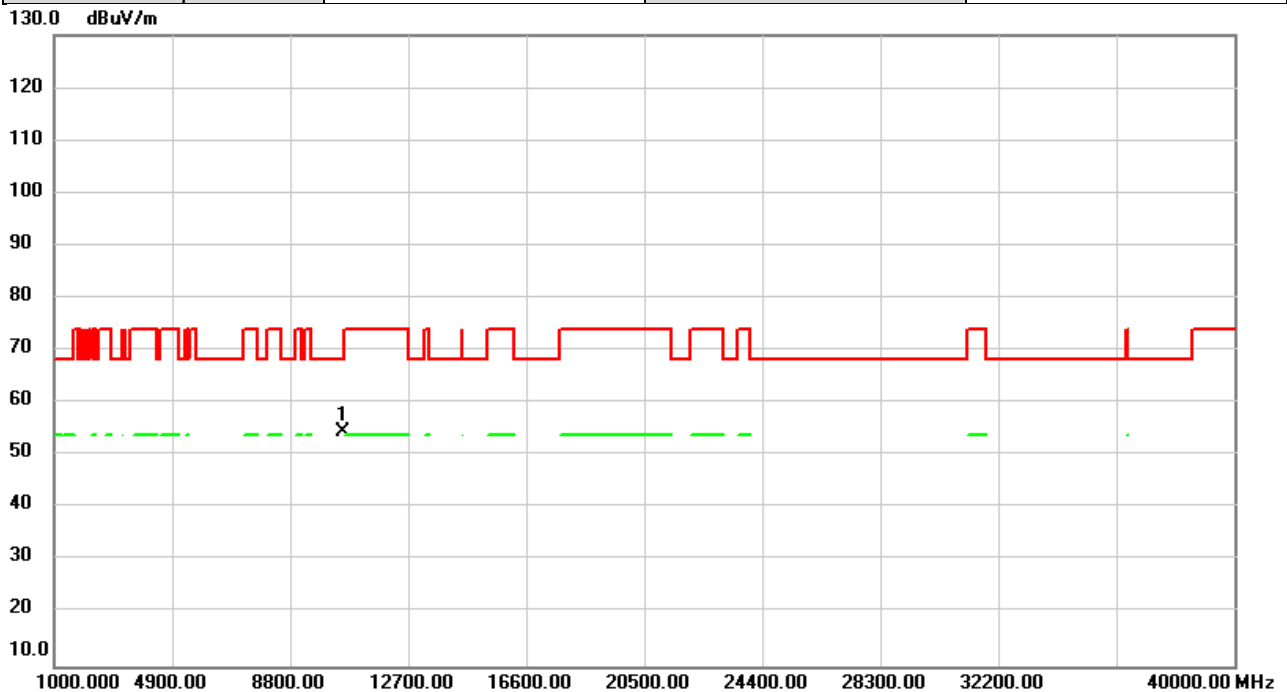


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	52.78	1.73	54.51	68.20	-13.69	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5310MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

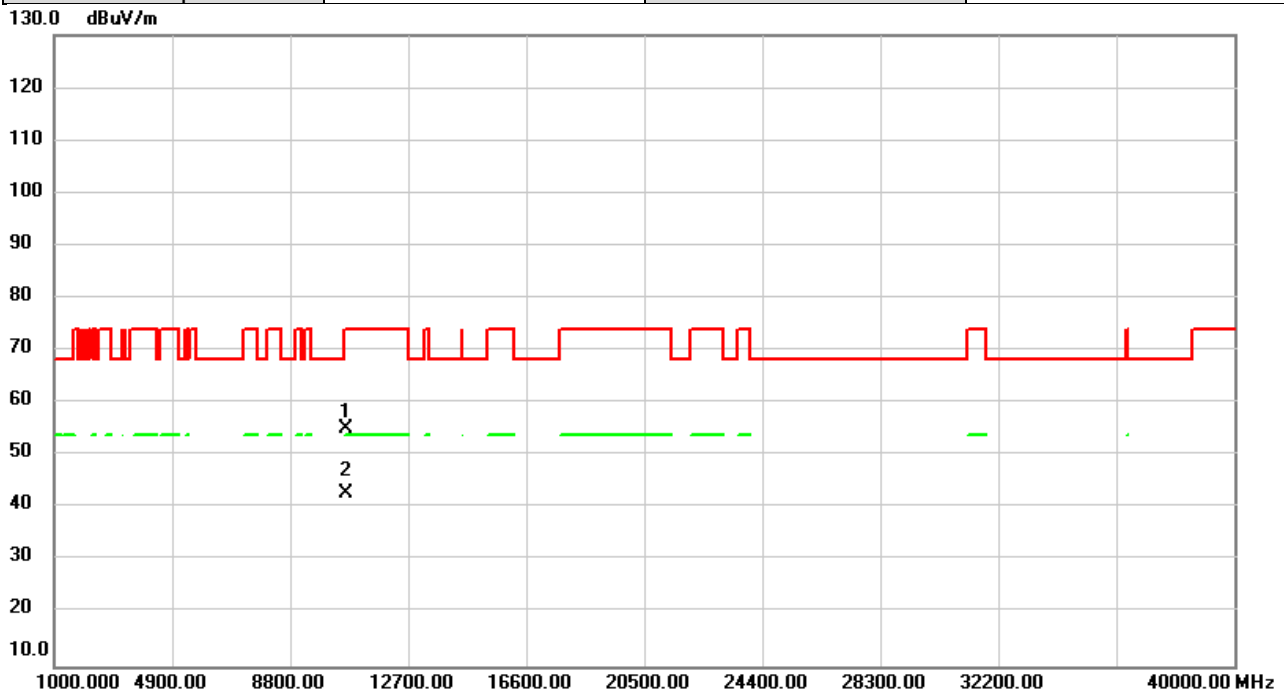


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	53.19	1.99	55.18	74.00	-18.82	peak	
2	*	10620.00	40.99	1.99	42.98	54.00	-11.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5310MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

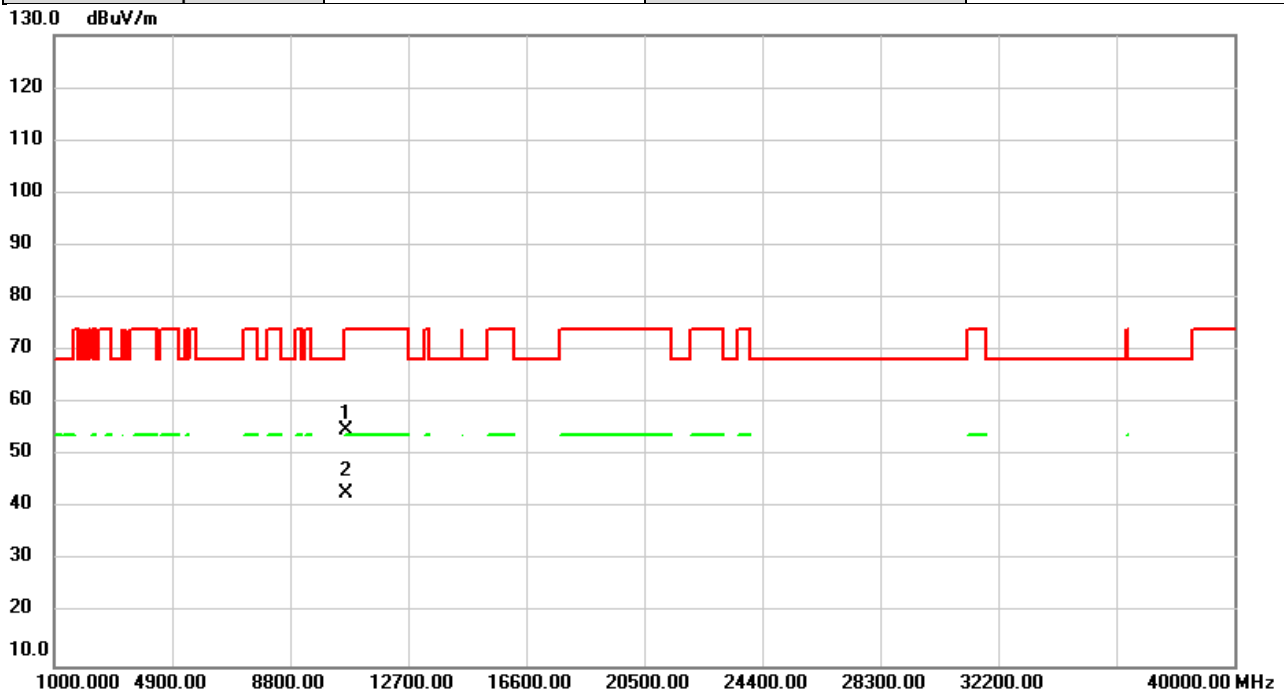


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	52.79	1.99	54.78	74.00	-19.22	peak	
2	*	10620.00	40.75	1.99	42.74	54.00	-11.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5510MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

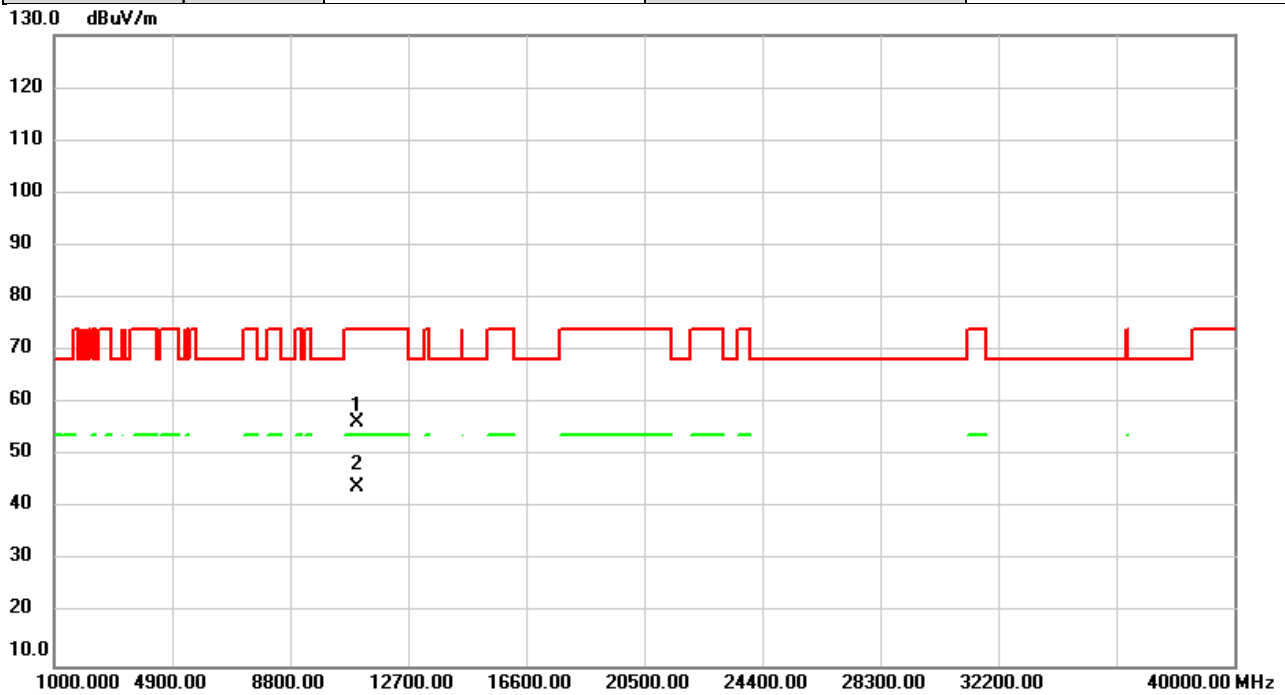


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	53.23	3.23	56.46	74.00	-17.54	peak	
2	*	11020.00	40.81	3.23	44.04	54.00	-9.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5510MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

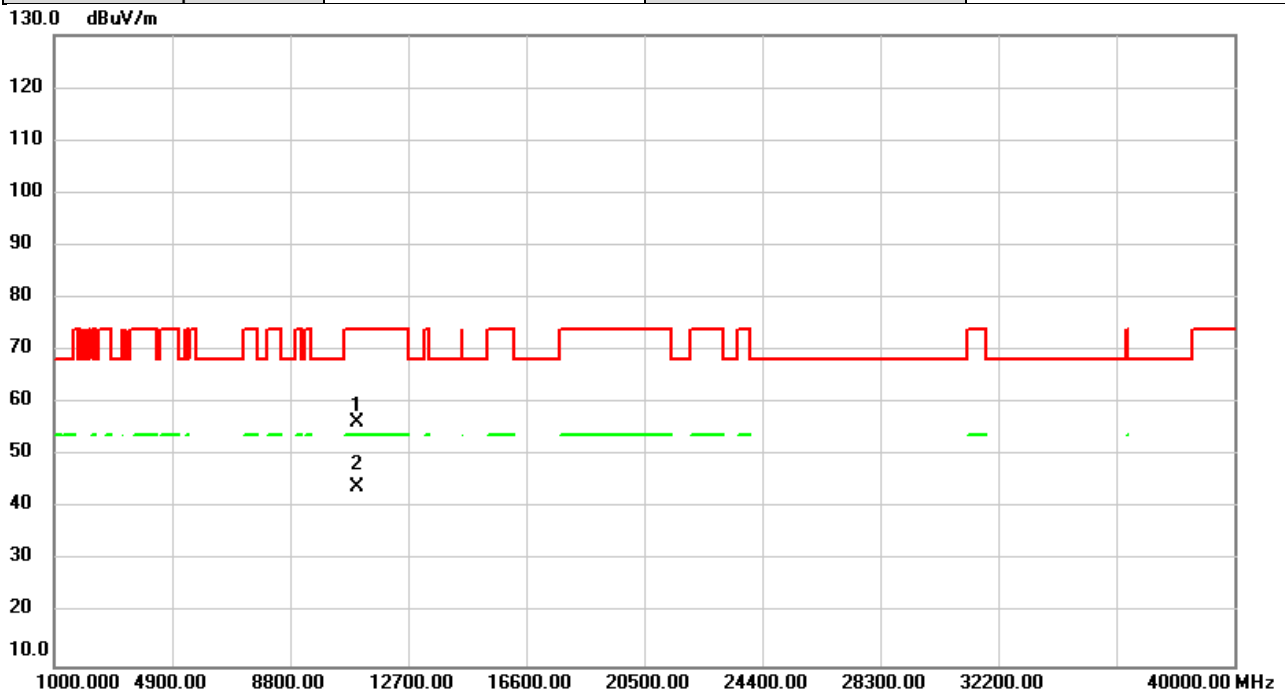


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	53.14	3.23	56.37	74.00	-17.63	peak	
2	*	11020.00	40.89	3.23	44.12	54.00	-9.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5550MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

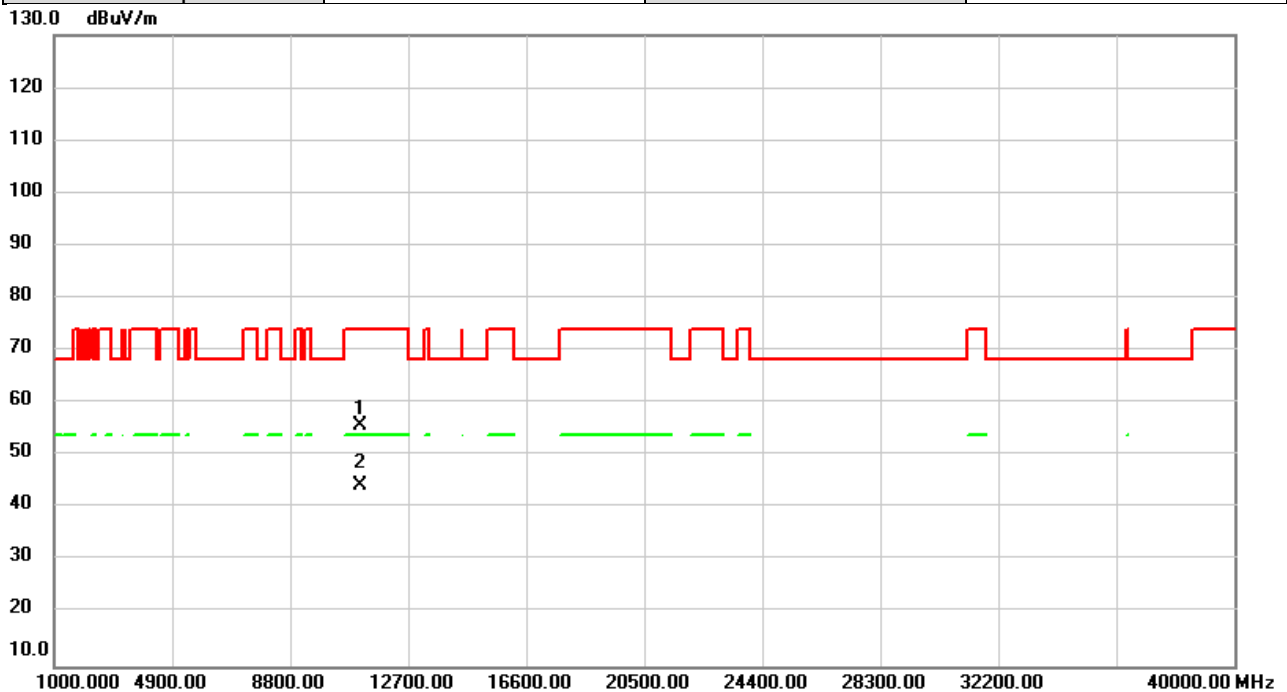


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	52.67	3.07	55.74	74.00	-18.26	peak	
2	*	11100.00	41.24	3.07	44.31	54.00	-9.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5550MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

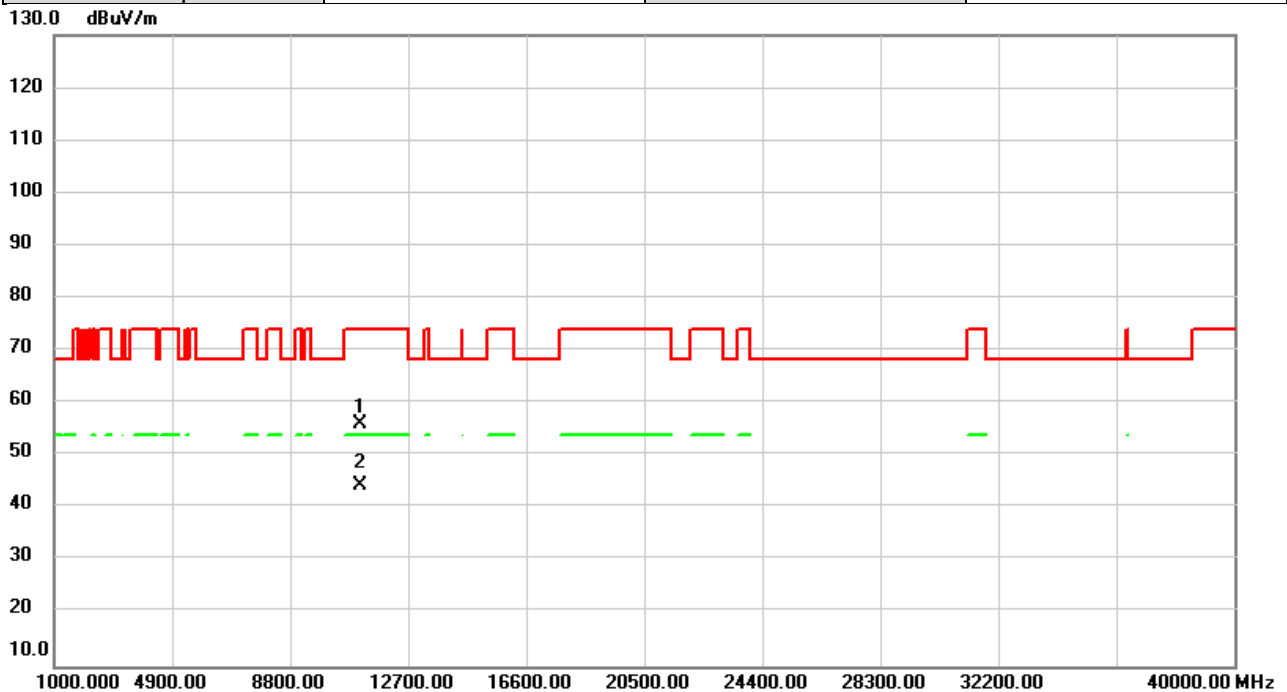


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	53.06	3.07	56.13	74.00	-17.87	peak	
2	*	11100.00	41.19	3.07	44.26	54.00	-9.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5670MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

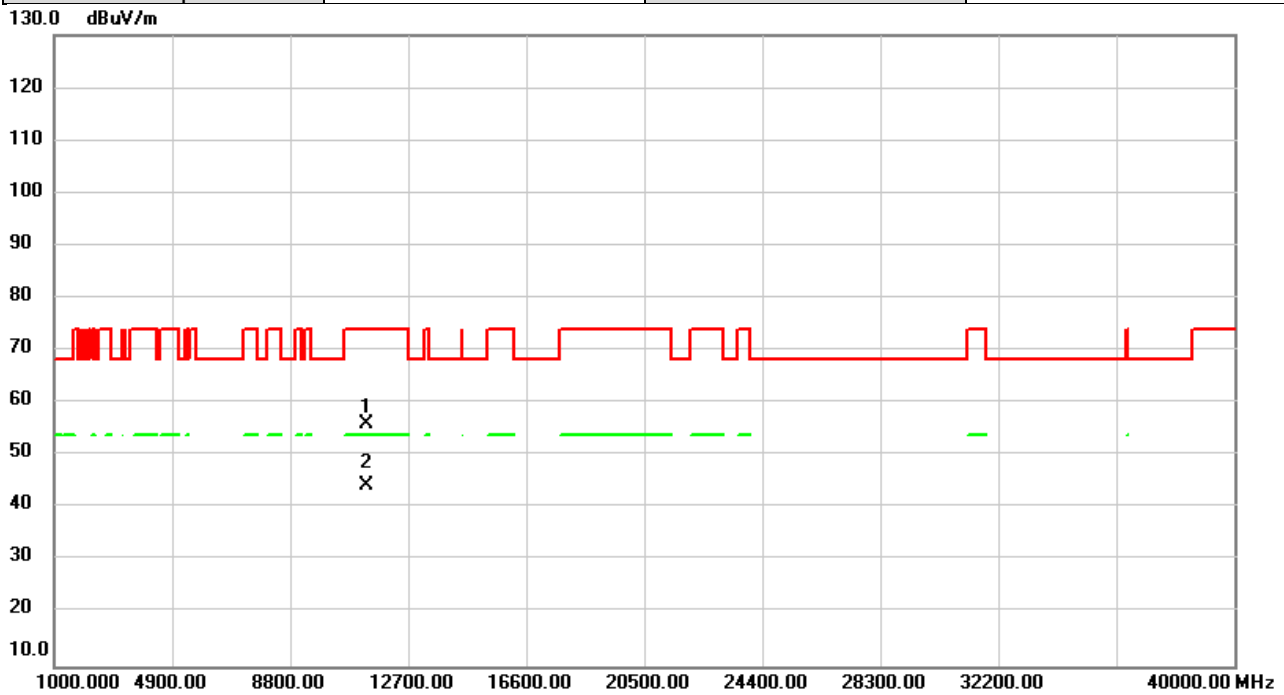


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	53.56	2.58	56.14	74.00	-17.86	peak	
2	*	11340.00	41.73	2.58	44.31	54.00	-9.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5670MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

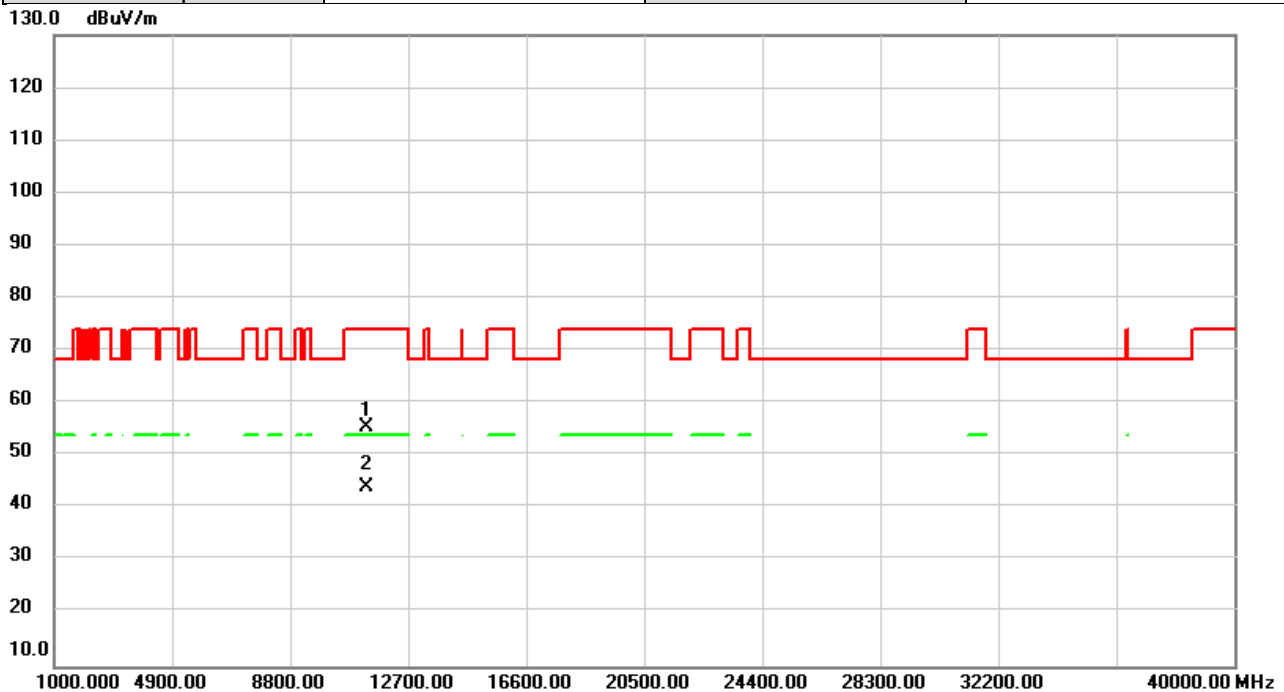


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	52.98	2.58	55.56	74.00	-18.44	peak	
2	*	11340.00	41.57	2.58	44.15	54.00	-9.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5710MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

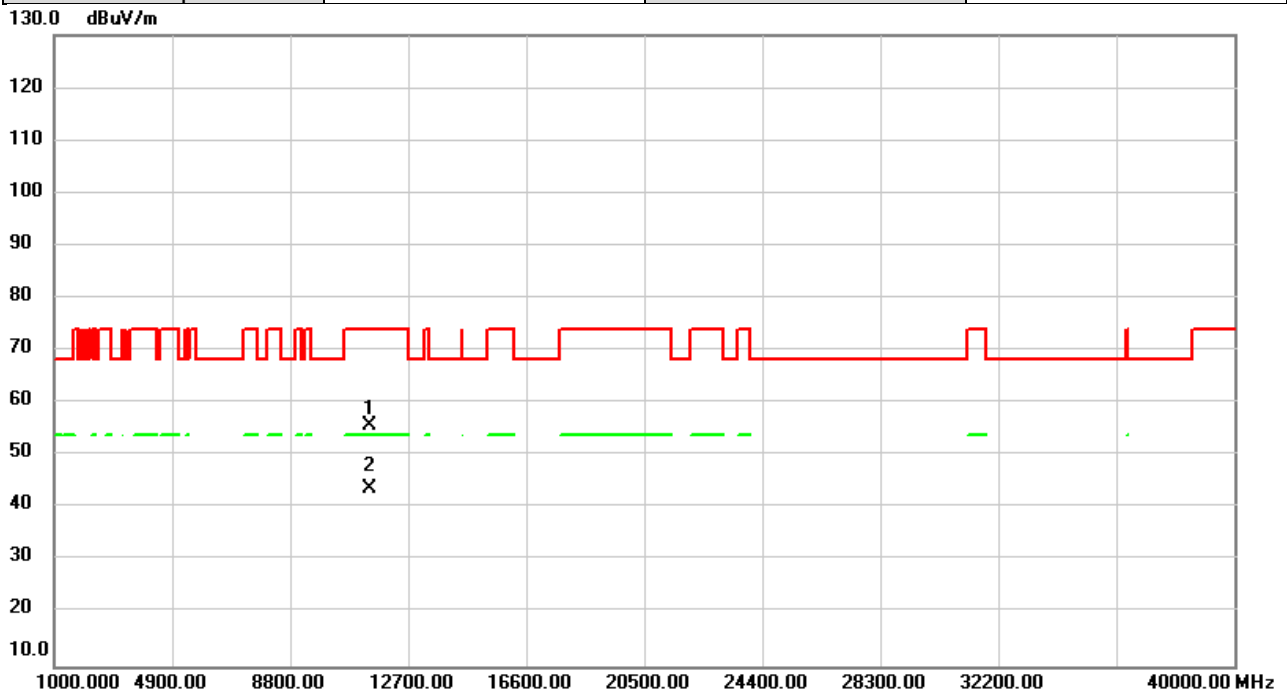


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11420.00	53.24	2.40	55.64	74.00	-18.36	peak	
2	*	11420.00	41.47	2.40	43.87	54.00	-10.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5710MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

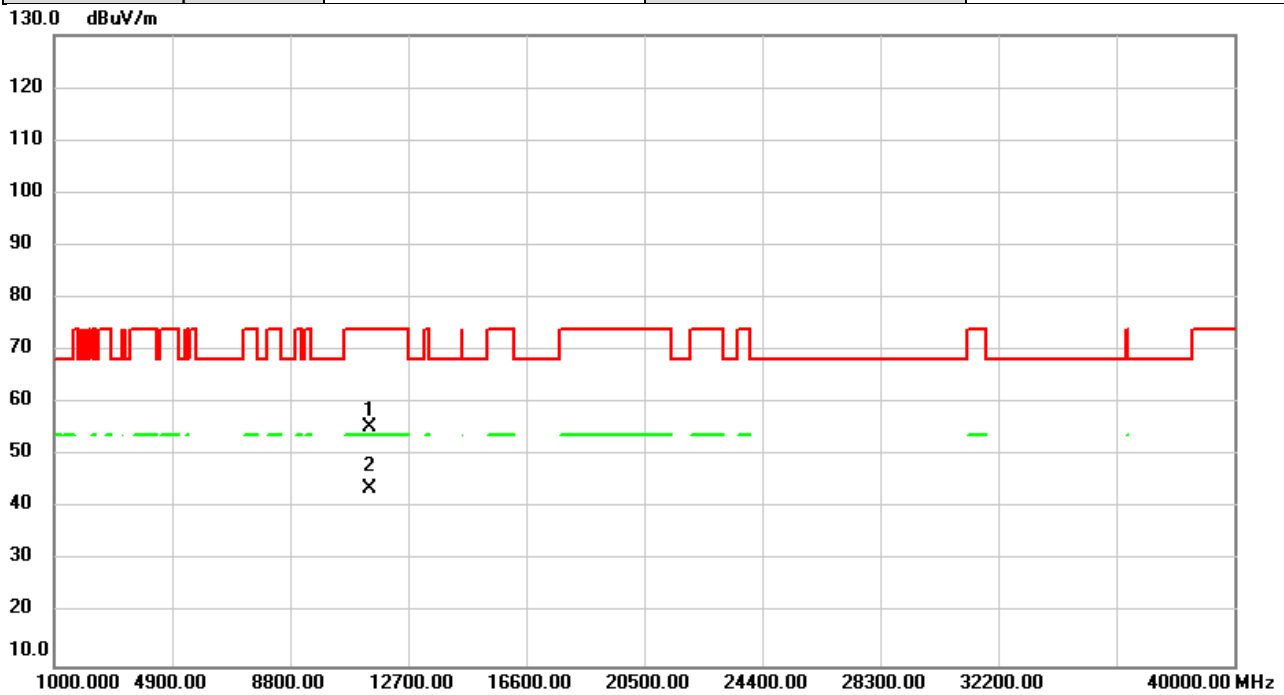


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11420.00	53.05	2.40	55.45	74.00	-18.55	peak	
2	*	11420.00	41.48	2.40	43.88	54.00	-10.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5755MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

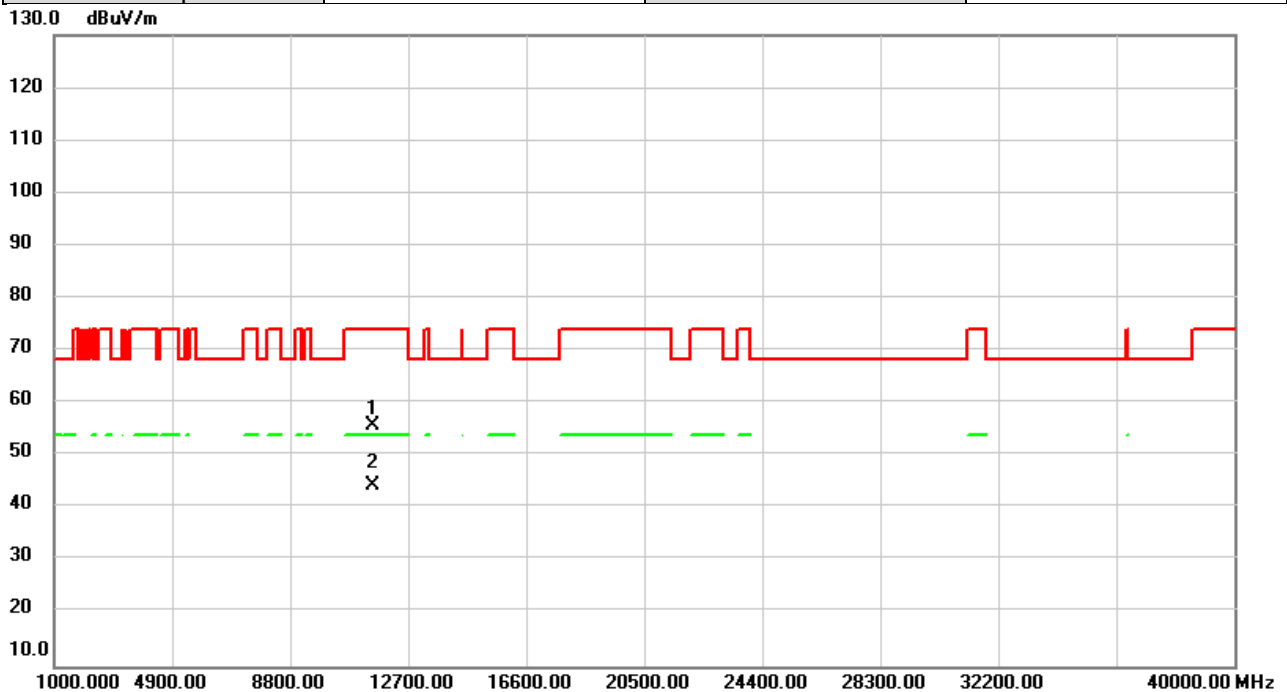


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	53.51	2.22	55.73	74.00	-18.27	peak	
2	*	11510.00	42.02	2.22	44.24	54.00	-9.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5755MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

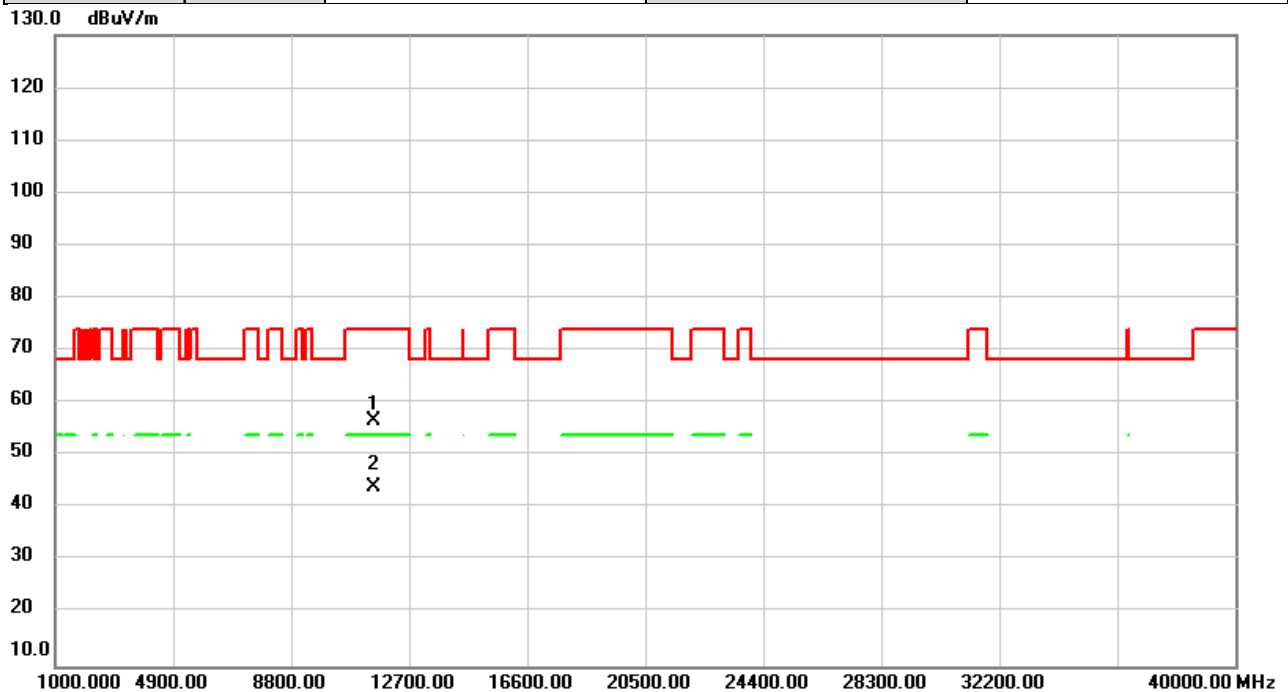


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	54.44	2.22	56.66	74.00	-17.34	peak	
2	*	11510.00	41.83	2.22	44.05	54.00	-9.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5795MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

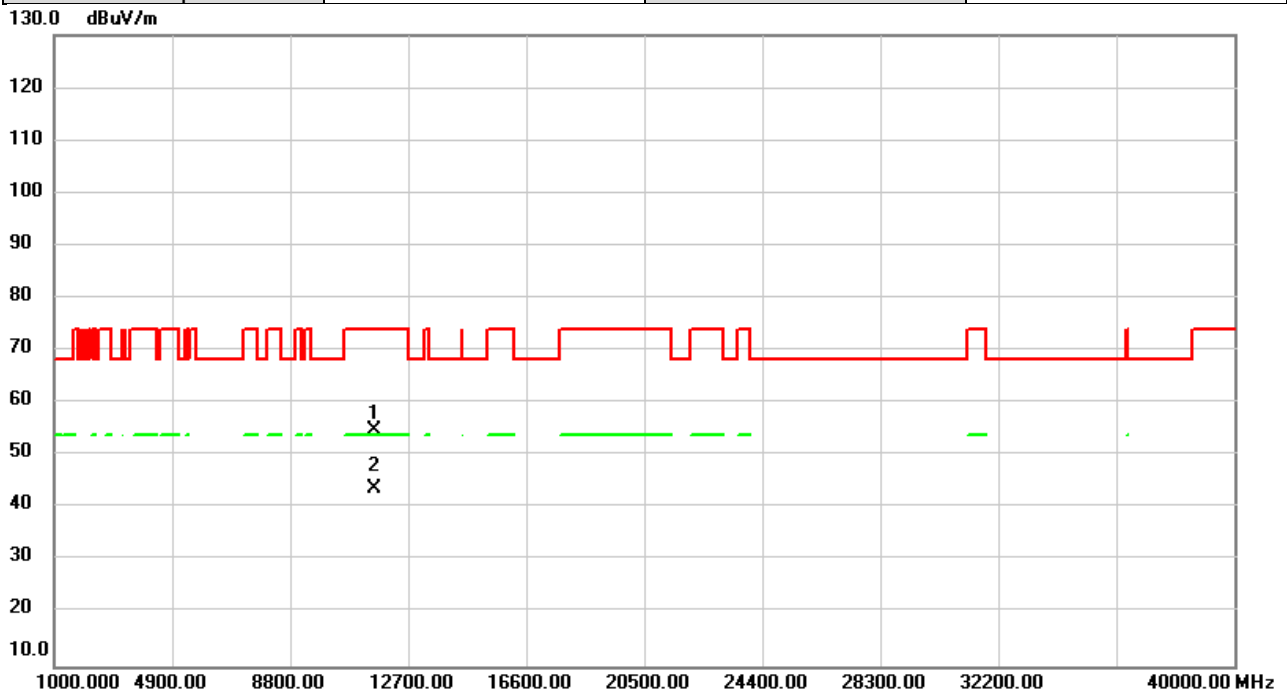


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	52.88	2.00	54.88	74.00	-19.12	peak	
2	*	11590.00	41.63	2.00	43.63	54.00	-10.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2021/12/9
Test Frequency	5795MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

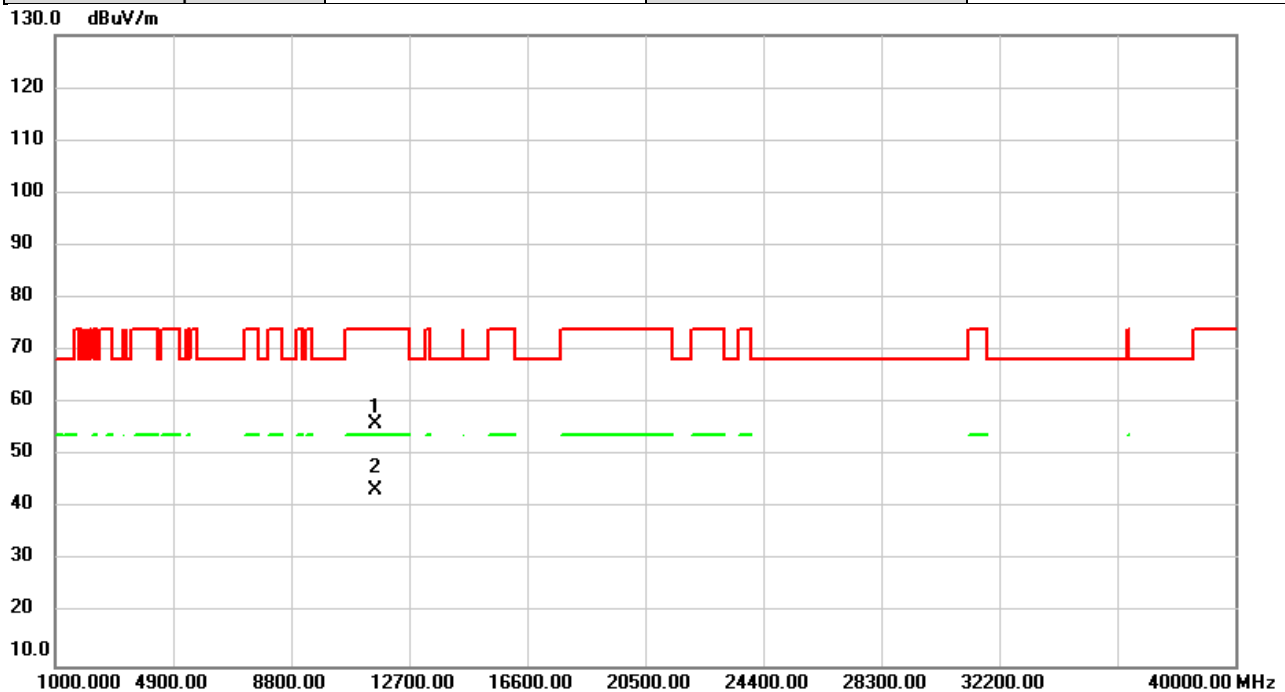


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	54.10	2.00	56.10	74.00	-17.90	peak	
2	*	11590.00	41.47	2.00	43.47	54.00	-10.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5210MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

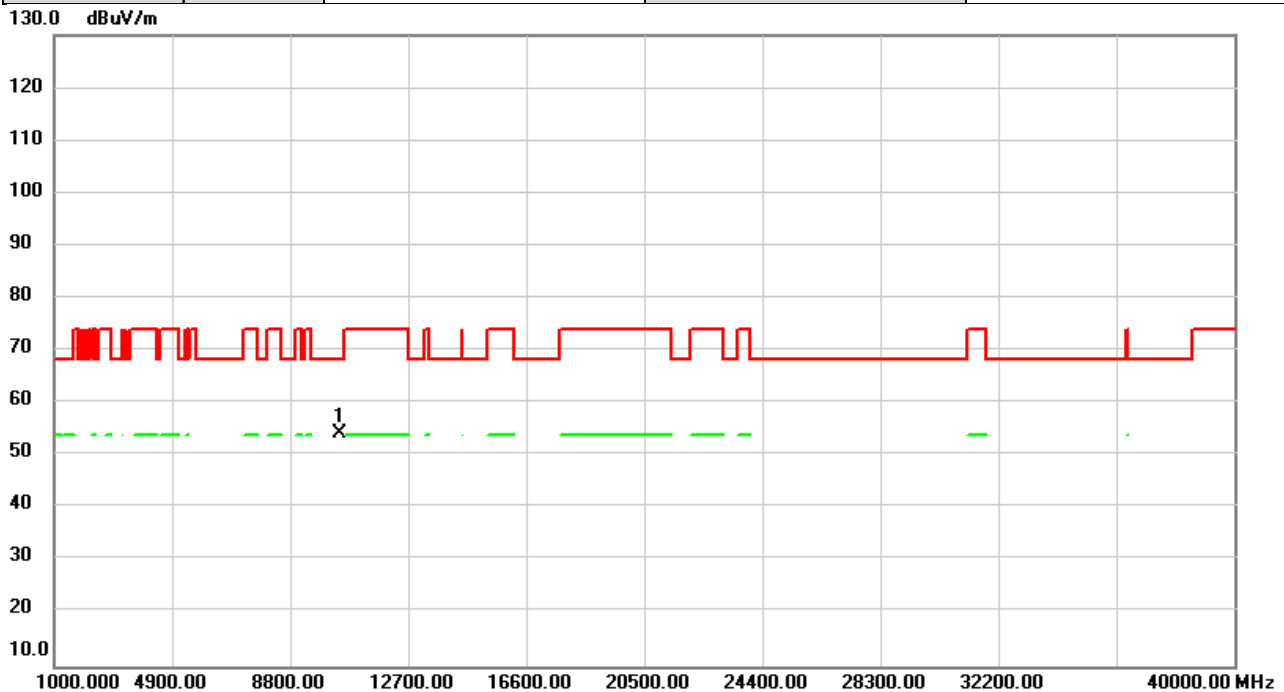


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	52.77	1.42	54.19	68.20	-14.01	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5210MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

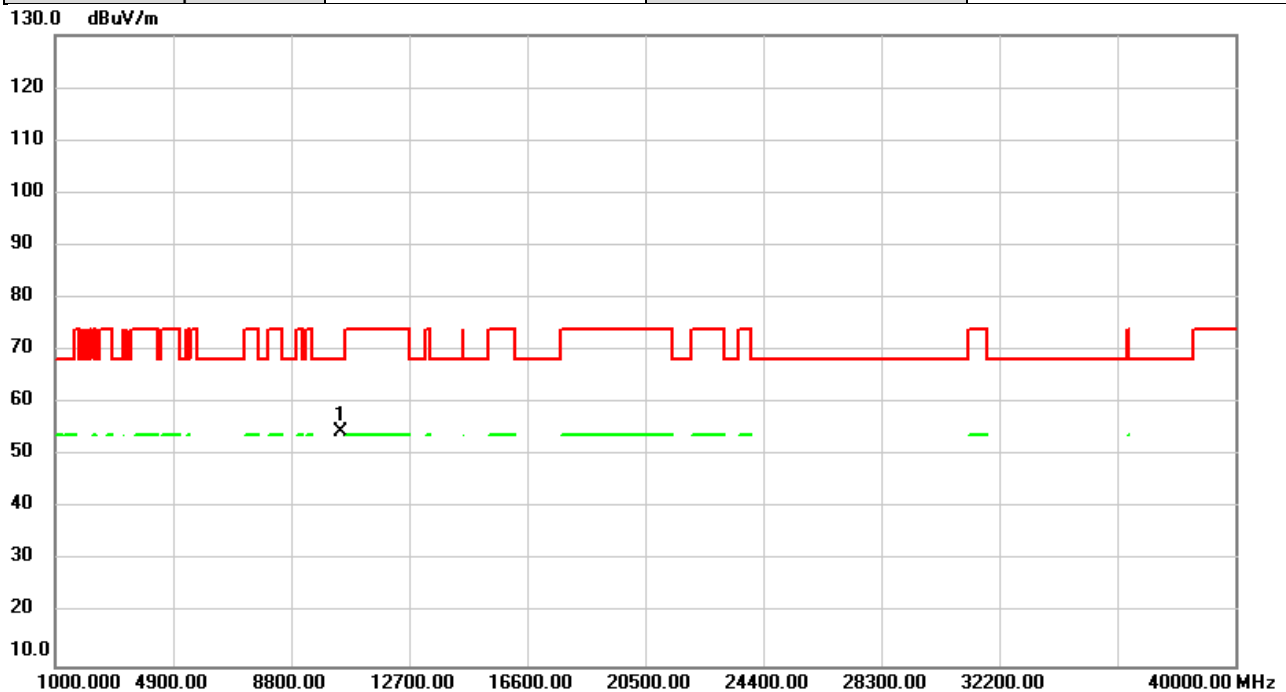


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	53.16	1.42	54.58	68.20	-13.62	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5290MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

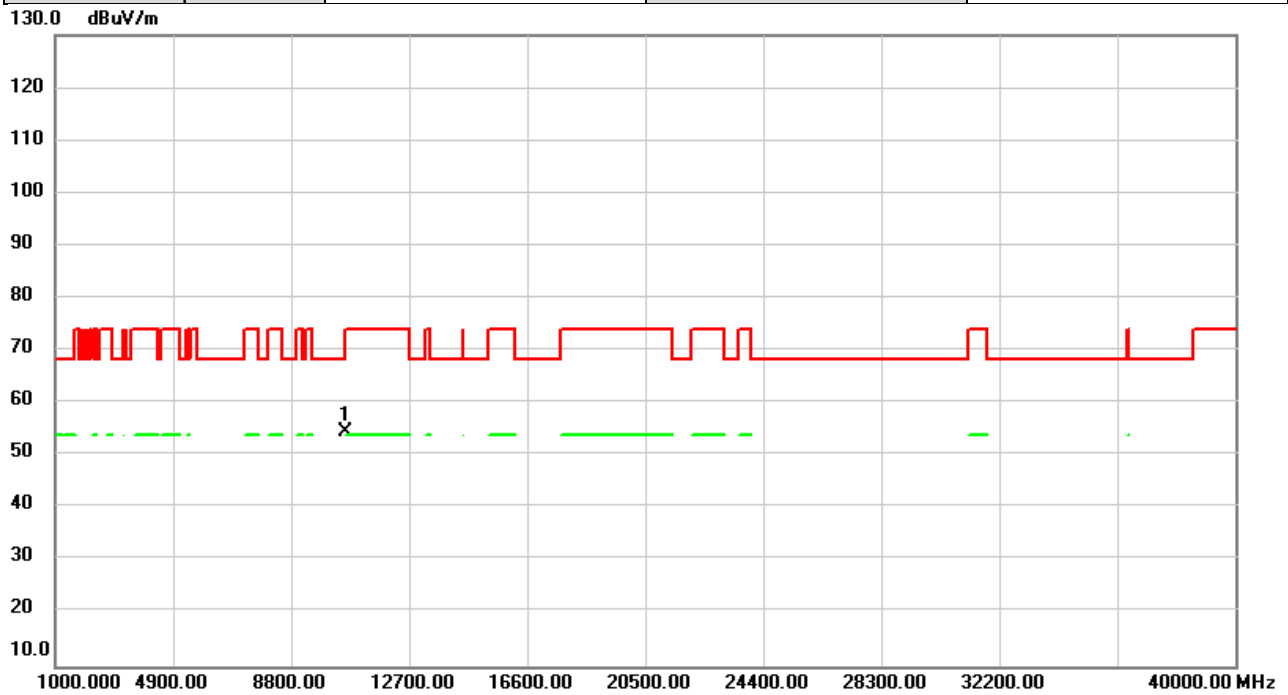


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	52.76	1.87	54.63	68.20	-13.57	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5290MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

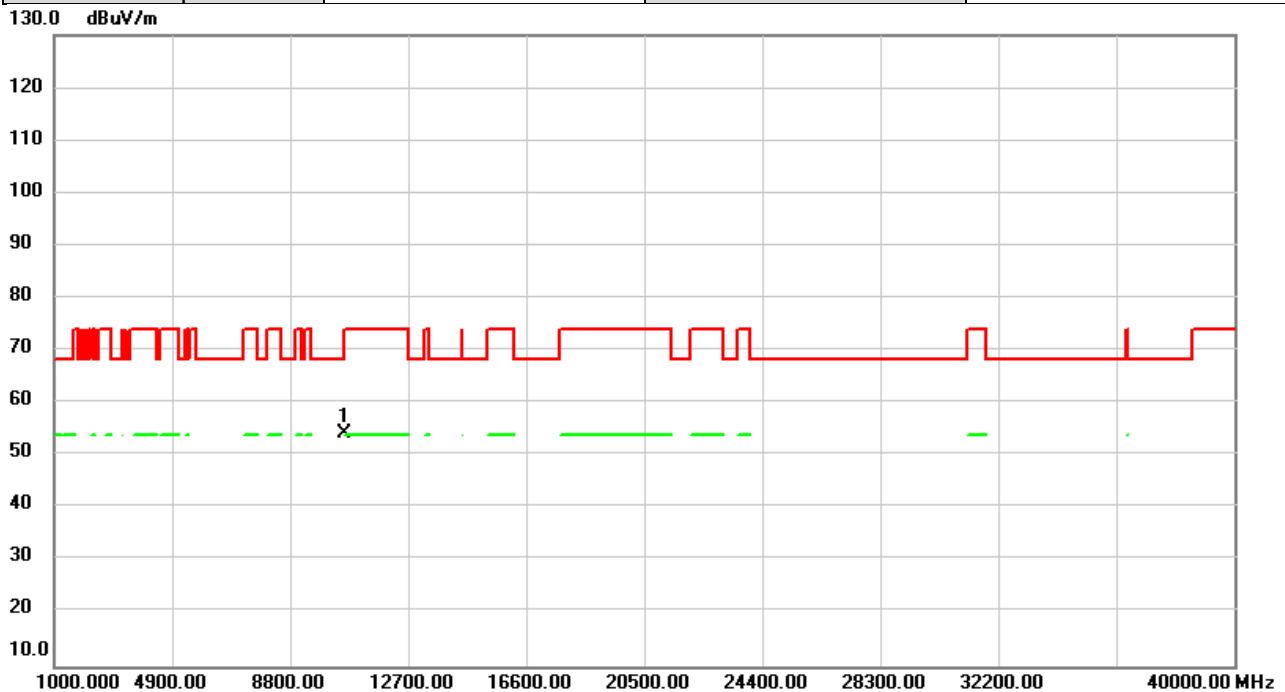


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	52.37	1.87	54.24	68.20	-13.96	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5530MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

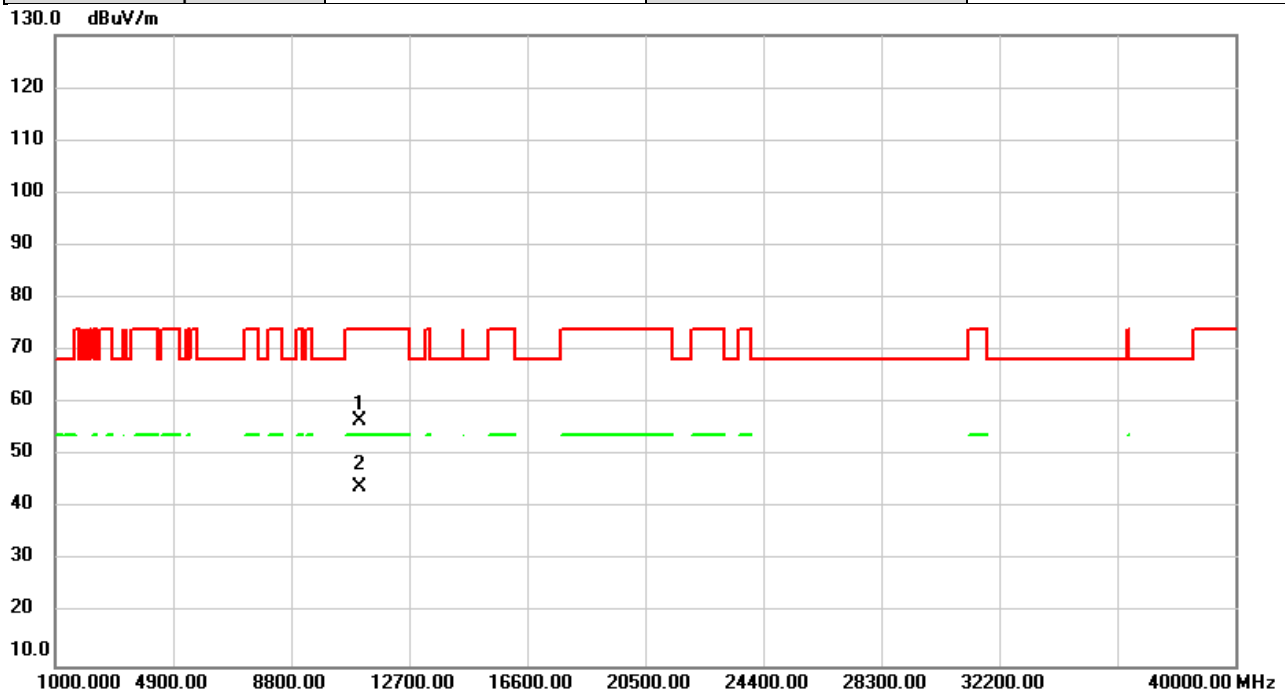


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	53.45	3.15	56.60	74.00	-17.40	peak	
2	*	11060.00	41.00	3.15	44.15	54.00	-9.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5530MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

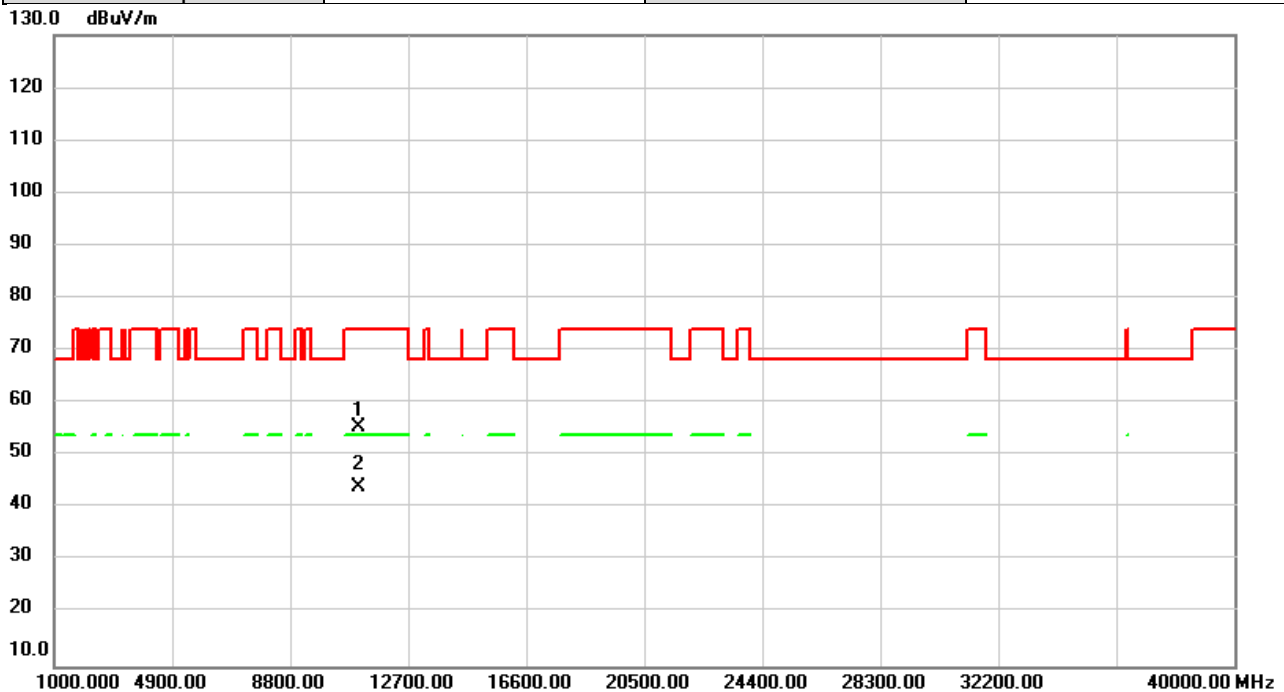


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	52.29	3.15	55.44	74.00	-18.56	peak	
2	*	11060.00	40.95	3.15	44.10	54.00	-9.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5610MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

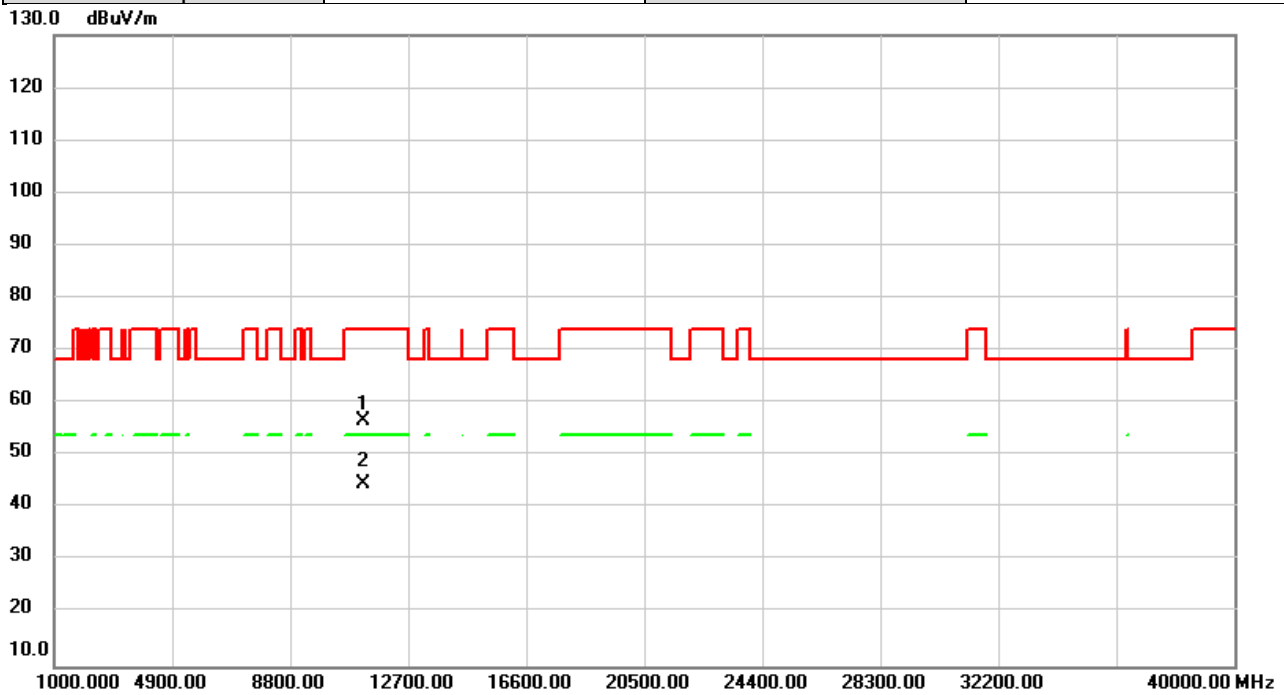


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	53.87	2.81	56.68	74.00	-17.32	peak	
2	*	11220.00	41.71	2.81	44.52	54.00	-9.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5610MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

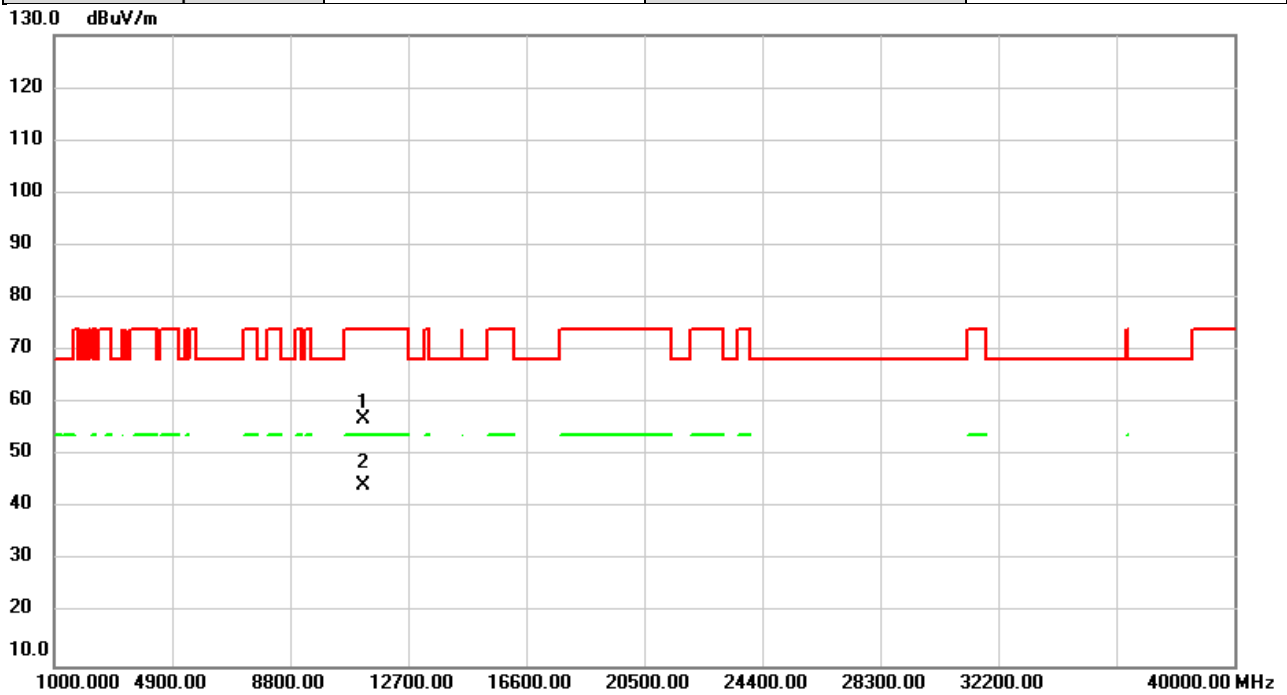


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	54.09	2.81	56.90	74.00	-17.10	peak	
2	*	11220.00	41.62	2.81	44.43	54.00	-9.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5690MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

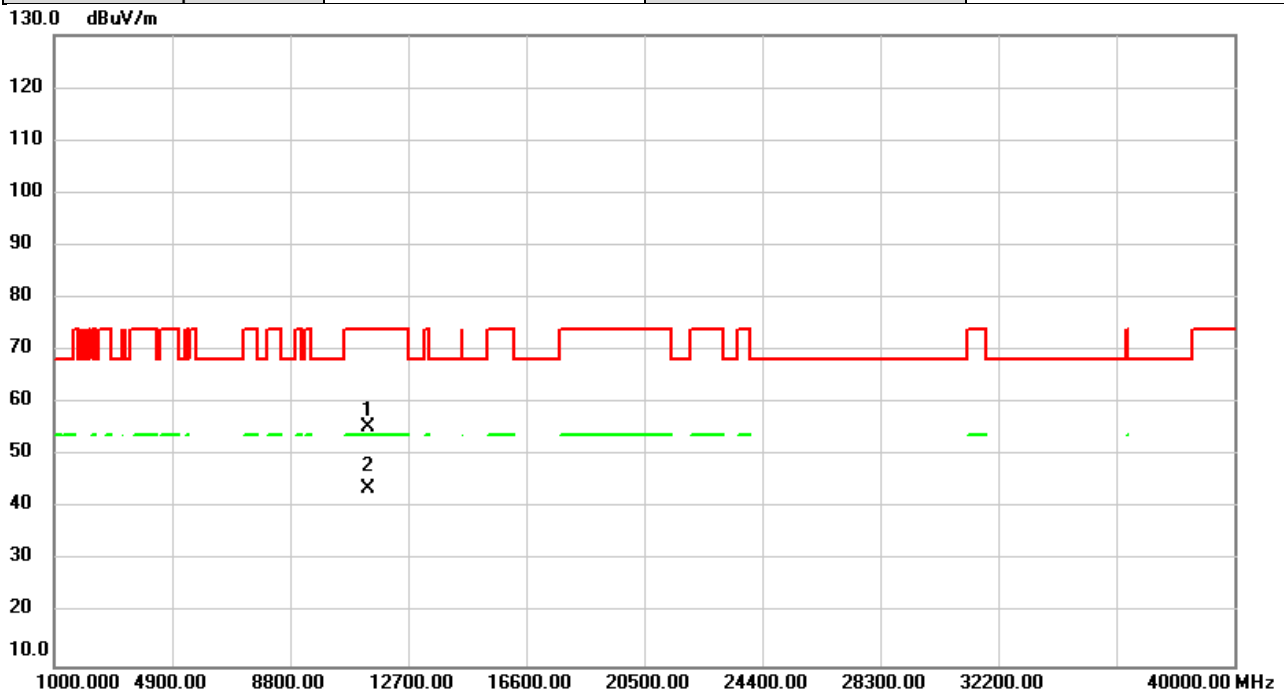


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11380.00	52.93	2.49	55.42	74.00	-18.58	peak	
2	*	11380.00	41.26	2.49	43.75	54.00	-10.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5690MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

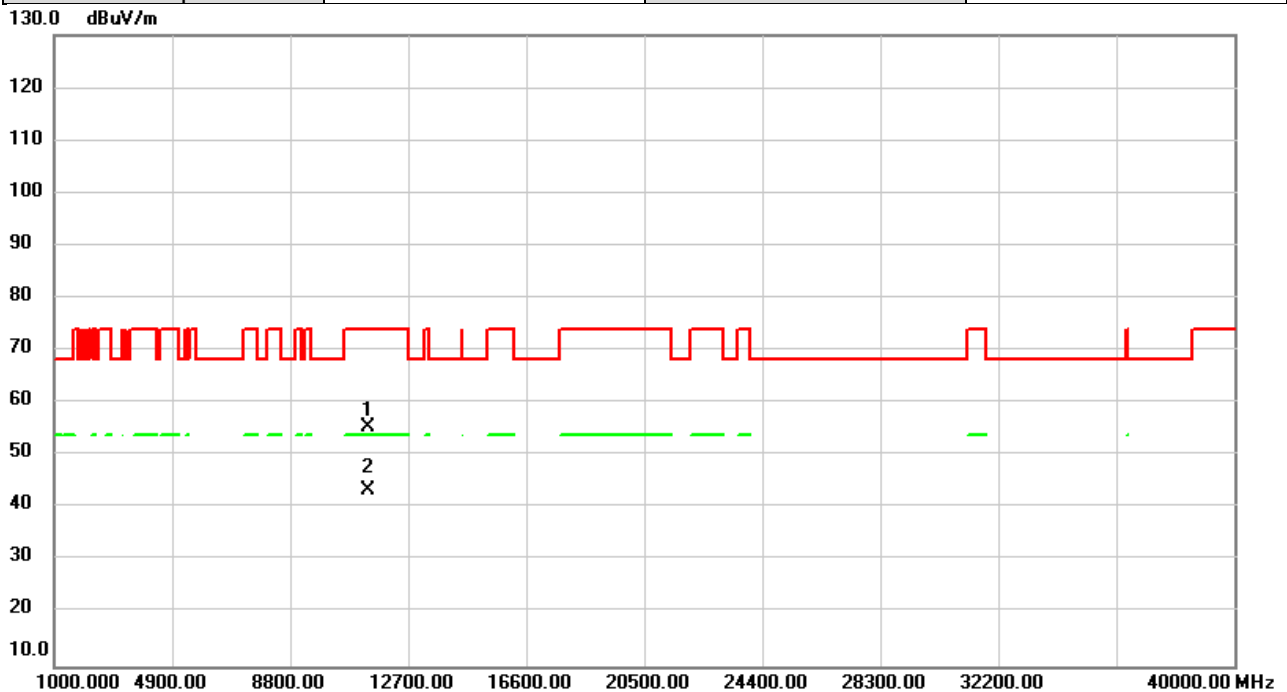


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	53.11	2.49	55.60	74.00	-18.40	peak	
2	*	11380.00	41.09	2.49	43.58	54.00	-10.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5775MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

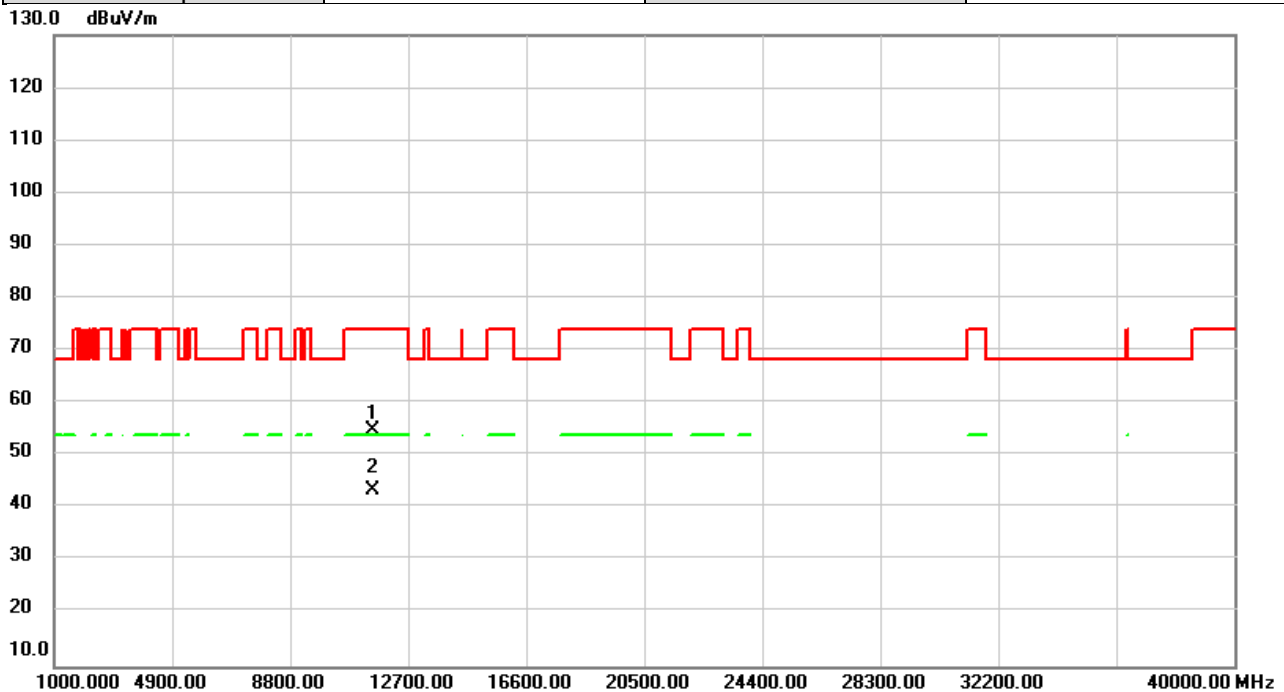


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	52.85	2.12	54.97	74.00	-19.03	peak	
2	*	11550.00	41.34	2.12	43.46	54.00	-10.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2021/12/9
Test Frequency	5775MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

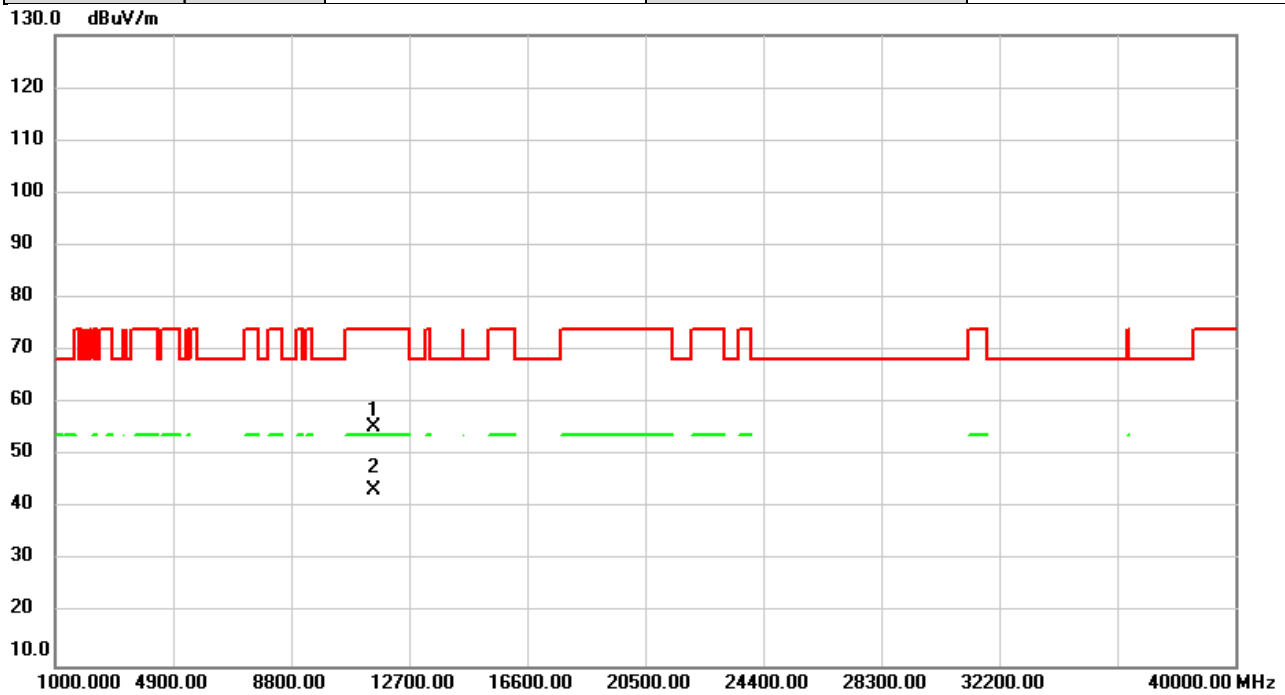


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	53.39	2.12	55.51	74.00	-18.49	peak	
2	*	11550.00	41.34	2.12	43.46	54.00	-10.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5180MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

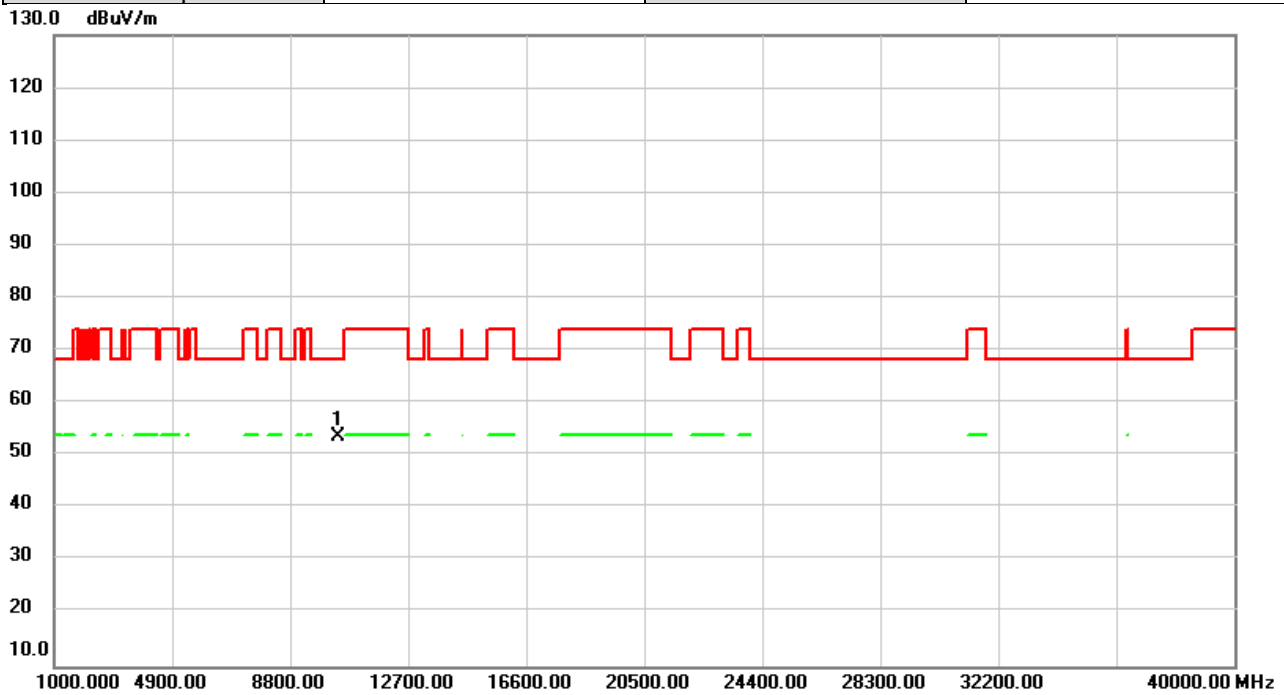


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	52.28	1.28	53.56	68.20	-14.64	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5180MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

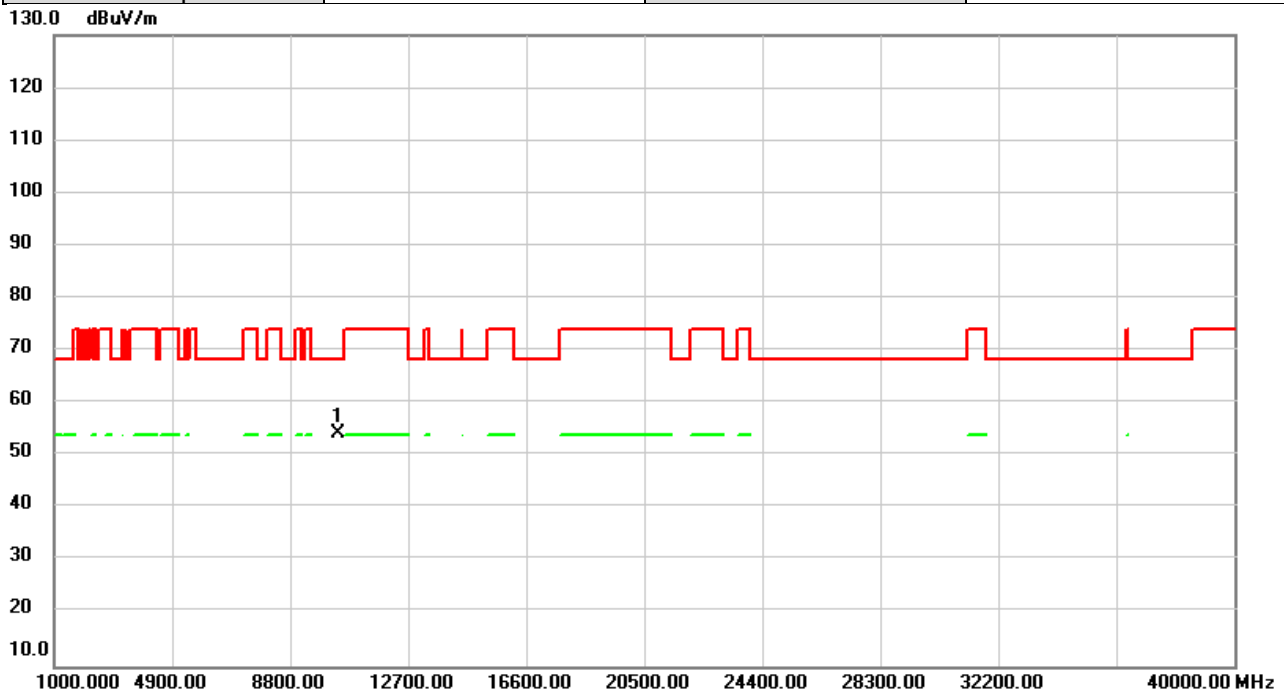


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	52.84	1.28	54.12	68.20	-14.08	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5200MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

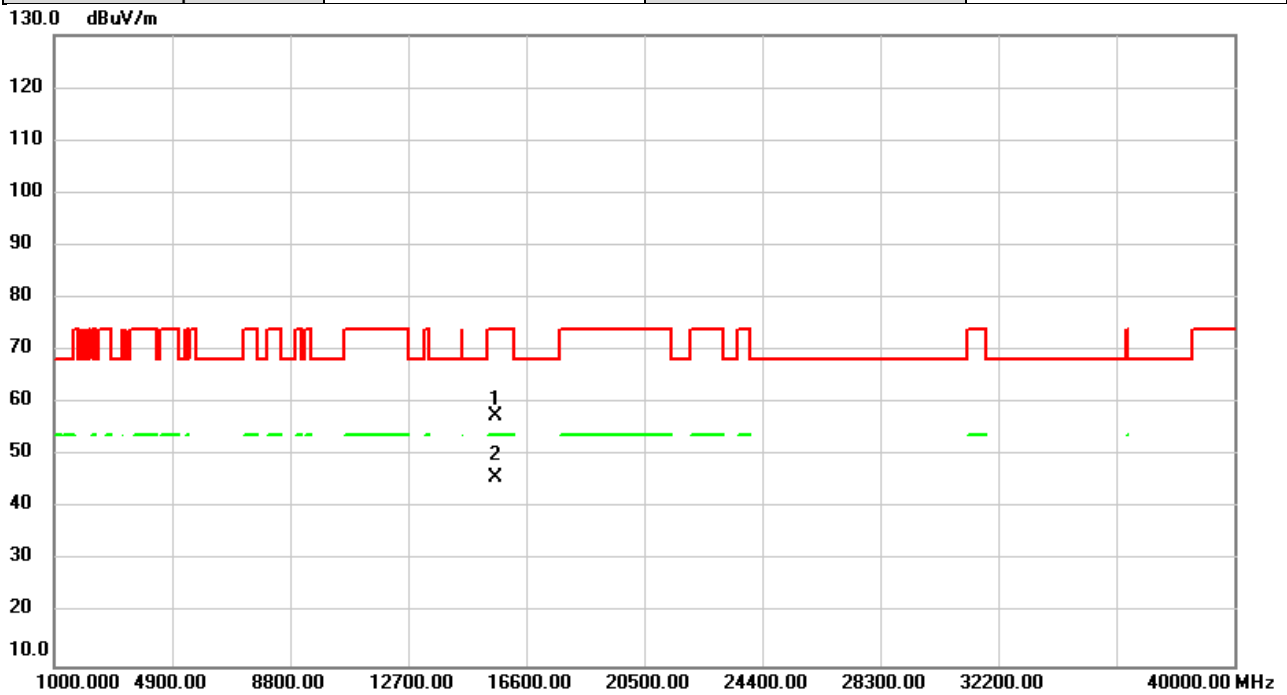


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15600.00	54.01	3.63	57.64	74.00	-16.36	peak	
2	*	15600.00	42.07	3.63	45.70	54.00	-8.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5200MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

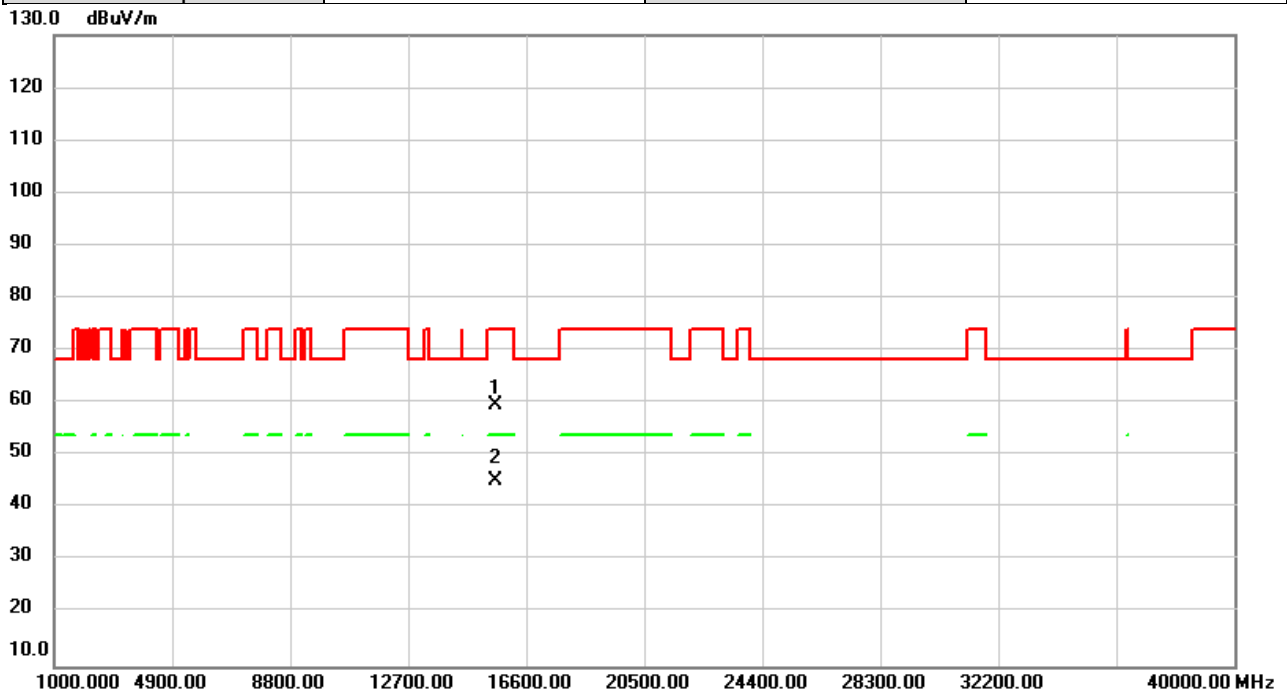


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15600.00	55.93	3.63	59.56	74.00	-14.44	peak	
2	*	15600.00	41.60	3.63	45.23	54.00	-8.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5240MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

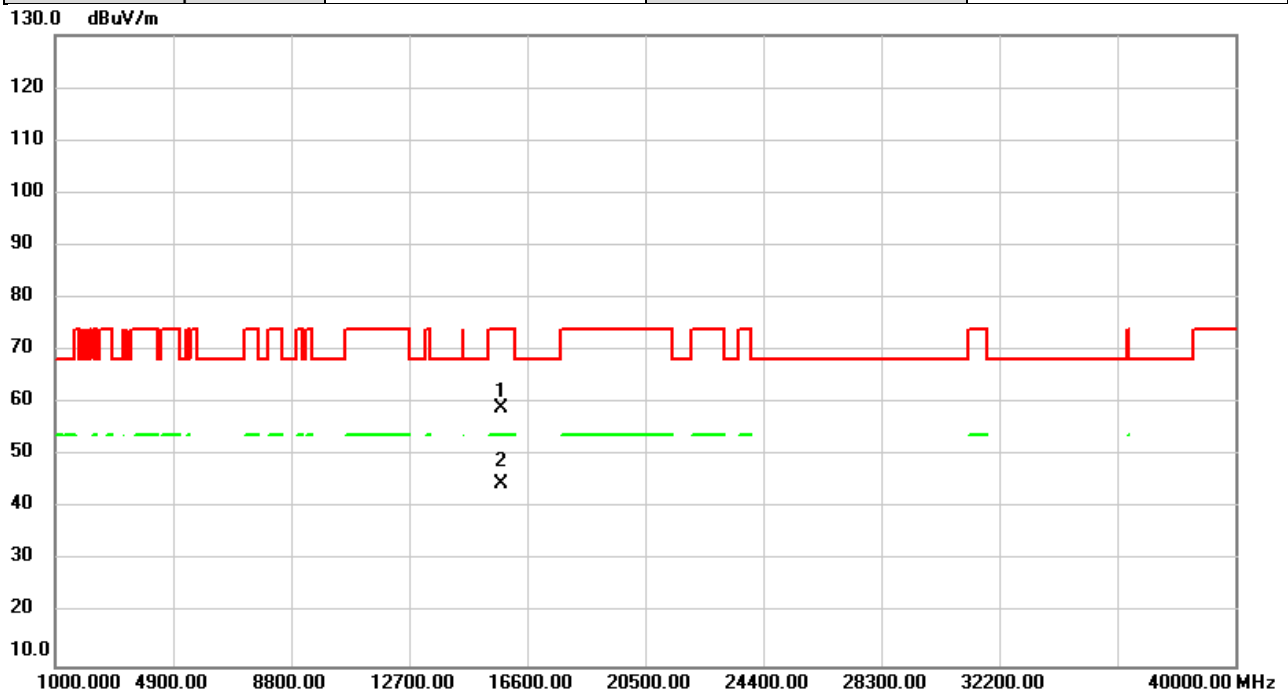


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15720.00	55.60	3.45	59.05	74.00	-14.95	peak	
2	*	15720.00	41.26	3.45	44.71	54.00	-9.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5240MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

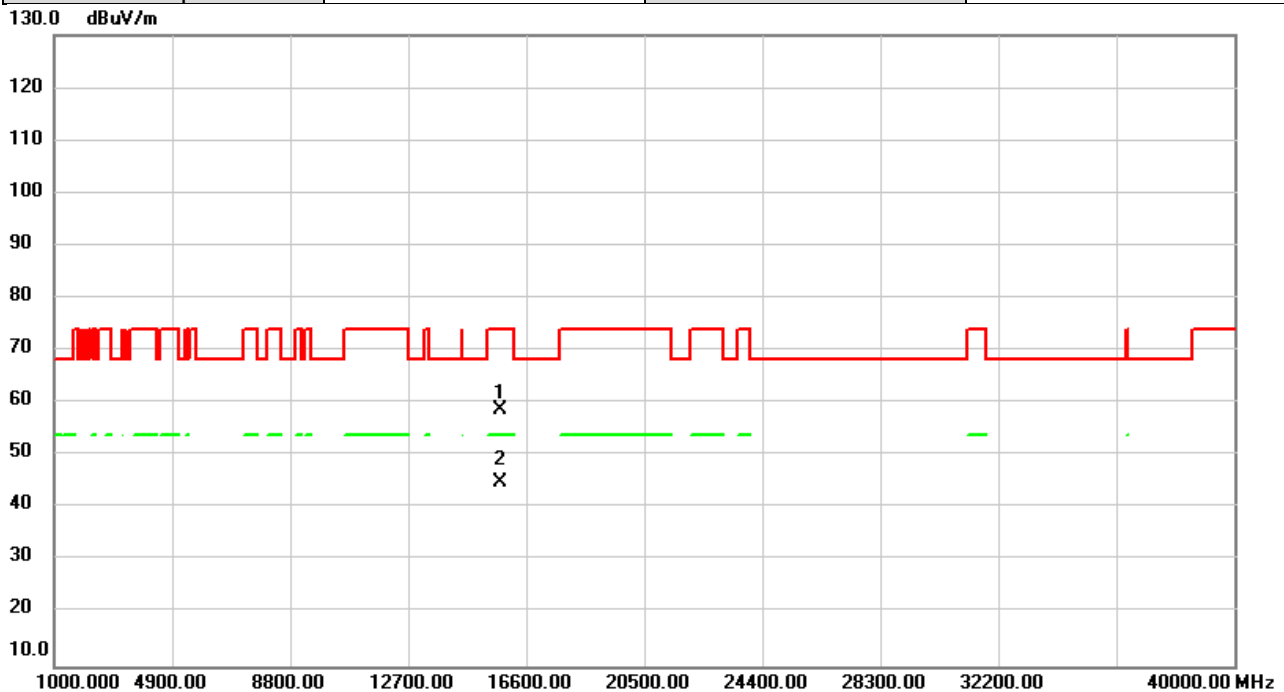


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		15720.00	55.21	3.45	58.66	74.00	-15.34	peak	
2	*	15720.00	41.51	3.45	44.96	54.00	-9.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5260MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

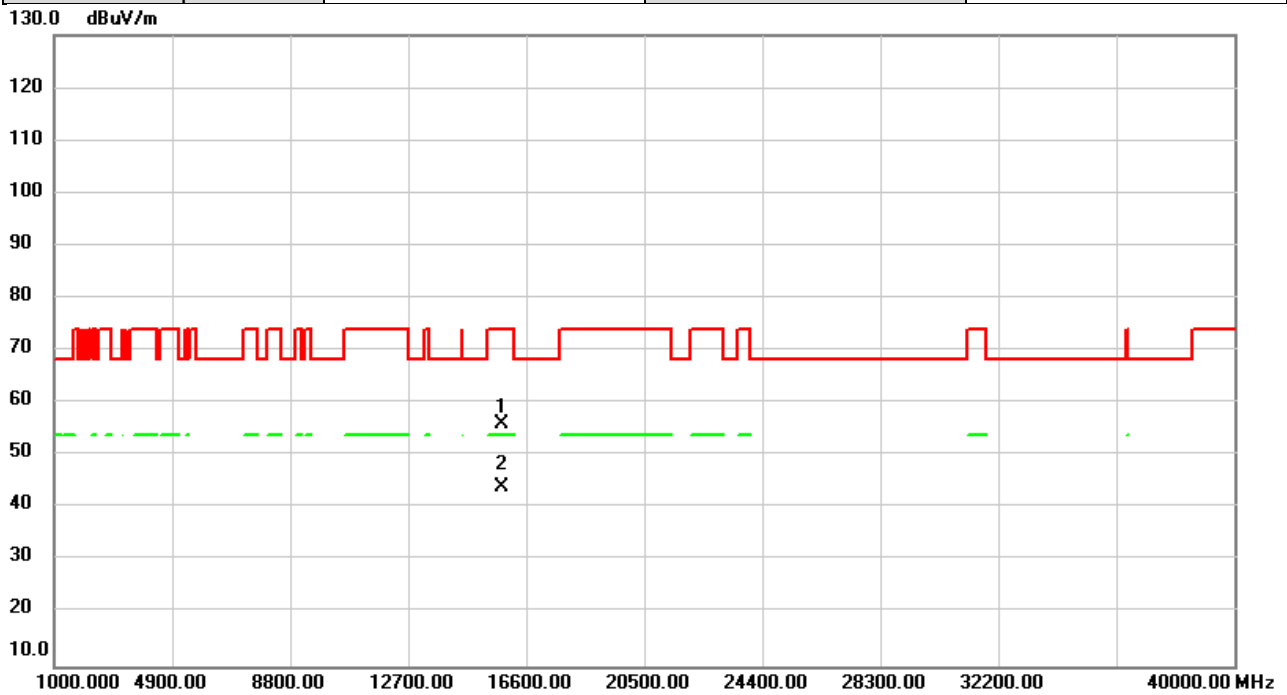


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15780.00	52.54	3.37	55.91	74.00	-18.09	peak	
2	*	15780.00	40.67	3.37	44.04	54.00	-9.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5260MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

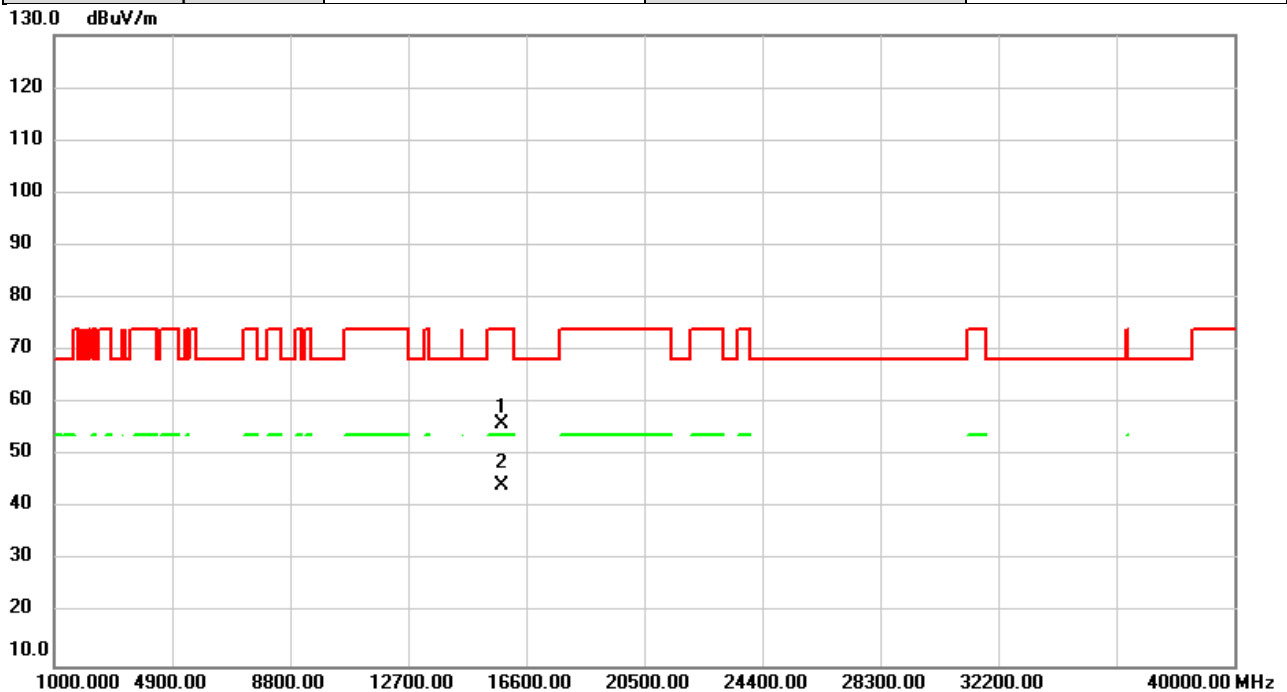


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15780.00	52.58	3.37	55.95	74.00	-18.05	peak	
2	*	15780.00	40.93	3.37	44.30	54.00	-9.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5300MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

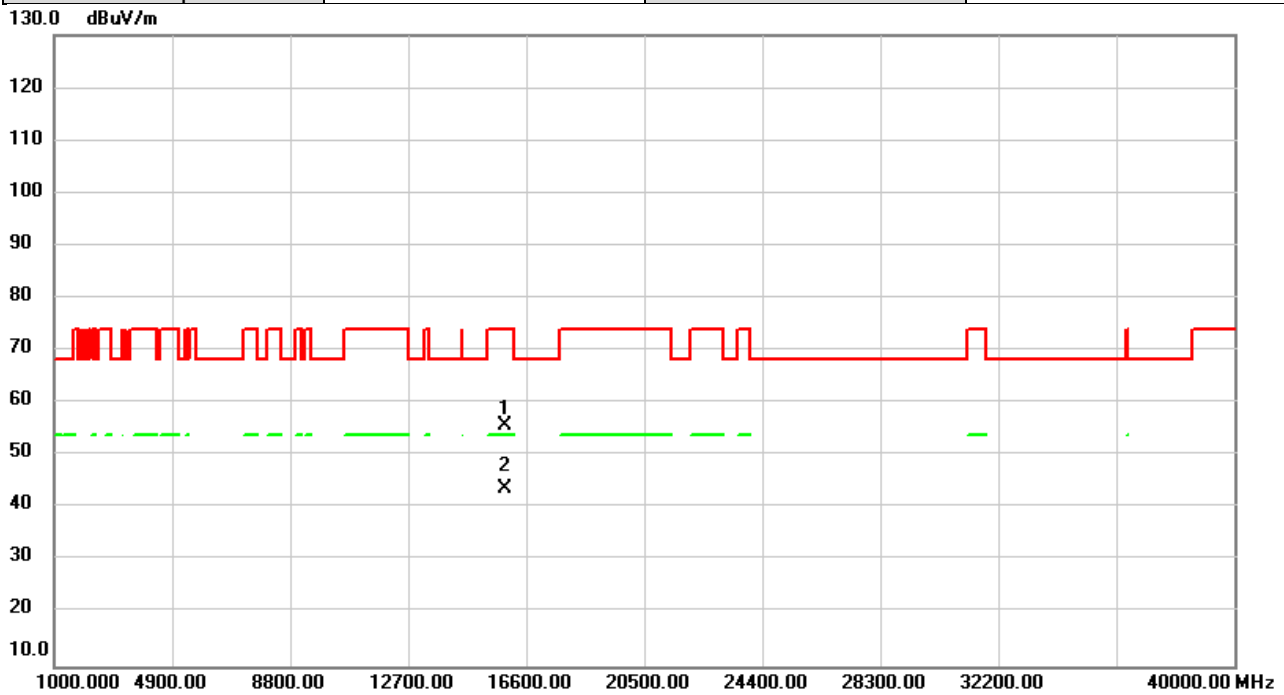


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		15900.00	52.62	3.19	55.81	74.00	-18.19	peak	
2	*	15900.00	40.64	3.19	43.83	54.00	-10.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5300MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

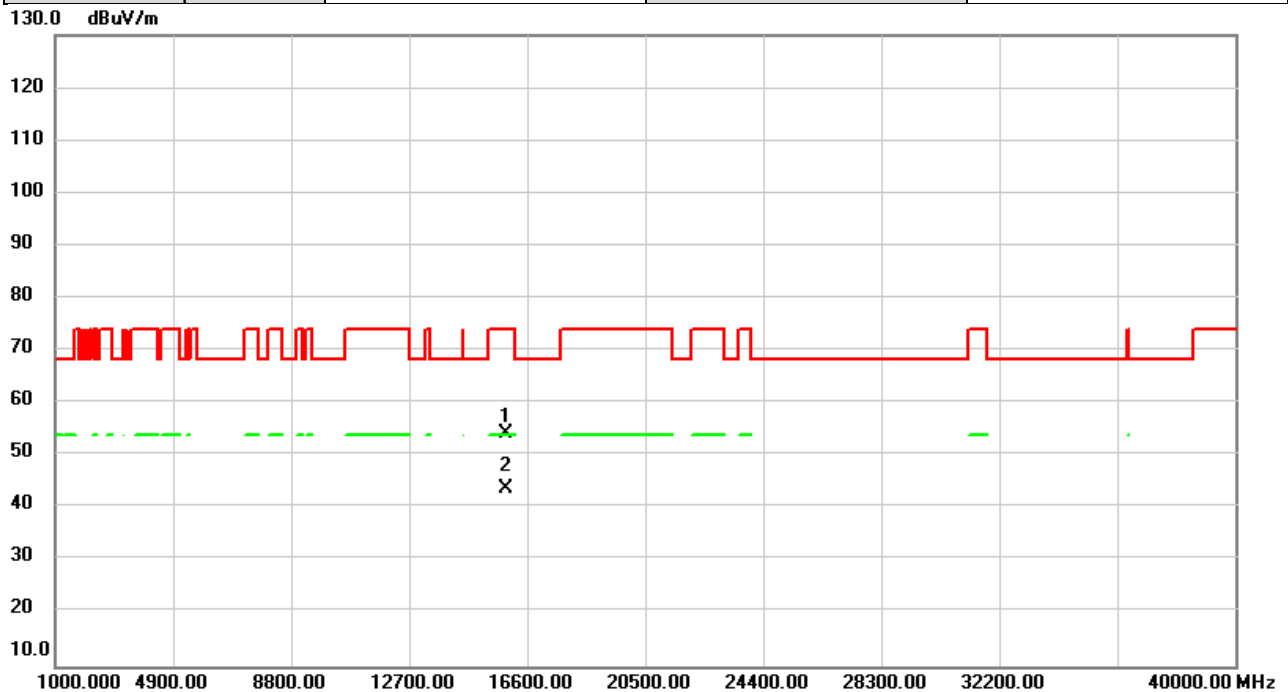


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		15900.00	51.04	3.19	54.23	74.00	-19.77	peak	
2	*	15900.00	40.48	3.19	43.67	54.00	-10.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5320MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

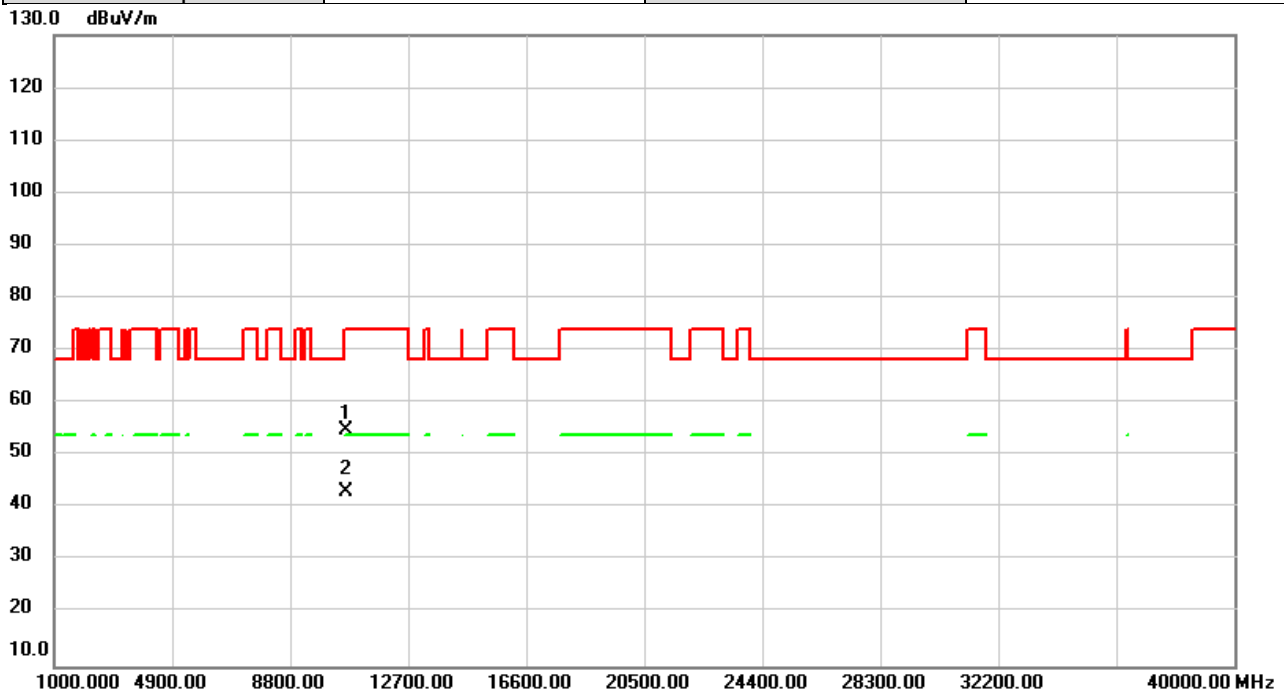


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	52.88	2.07	54.95	74.00	-19.05	peak	
2	*	10640.00	41.07	2.07	43.14	54.00	-10.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5320MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

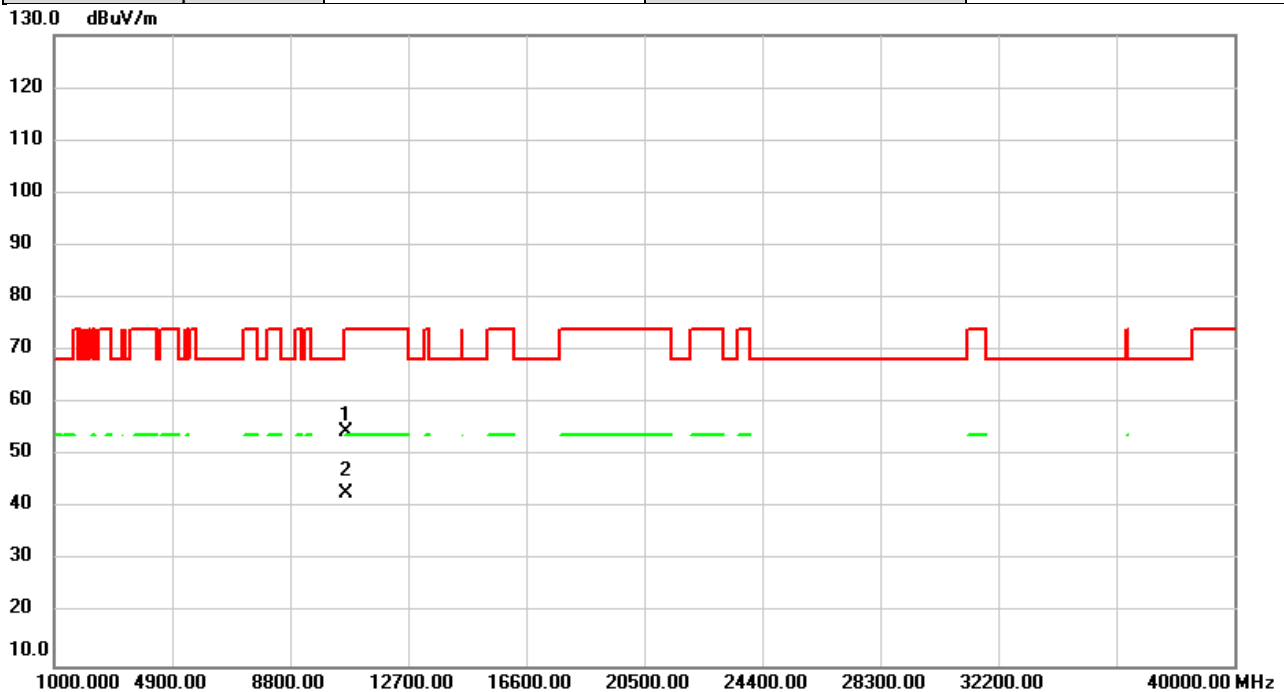


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	52.56	2.07	54.63	74.00	-19.37	peak	
2	*	10640.00	40.84	2.07	42.91	54.00	-11.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5500MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

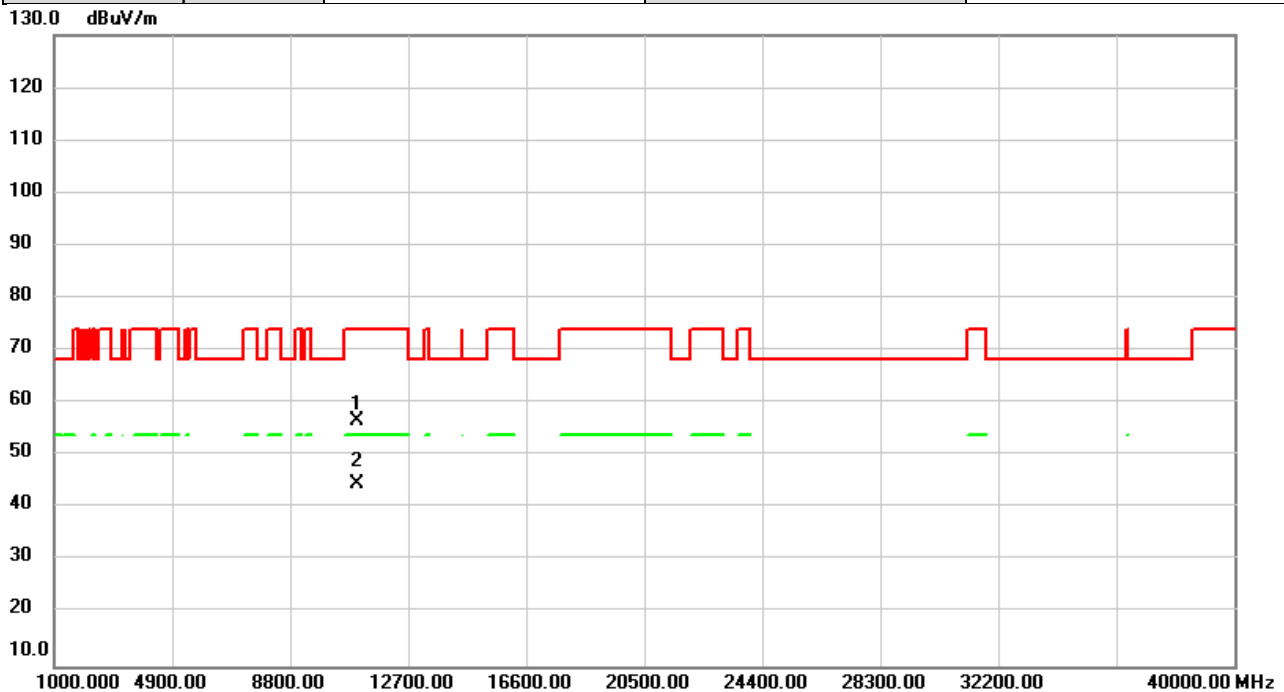


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	53.49	3.27	56.76	74.00	-17.24	peak	
2	*	11000.00	41.35	3.27	44.62	54.00	-9.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5500MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

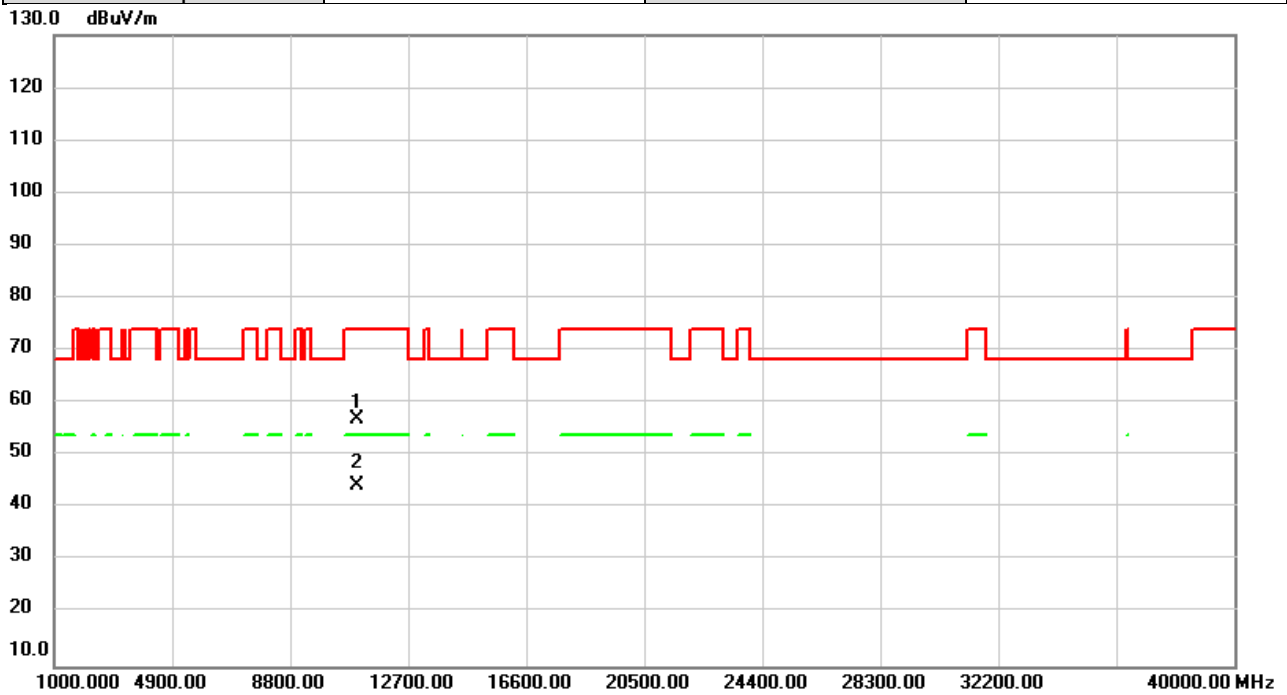


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	53.71	3.27	56.98	74.00	-17.02	peak	
2	*	11000.00	41.14	3.27	44.41	54.00	-9.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5580MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

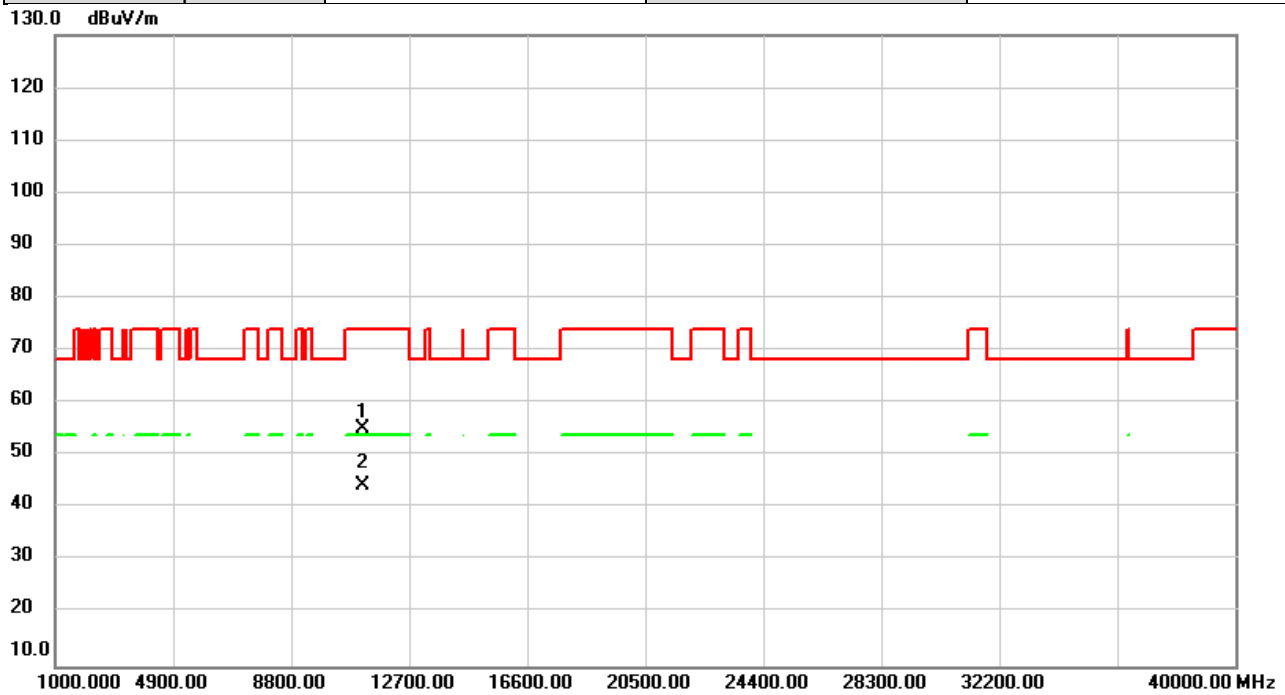


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	52.32	2.93	55.25	74.00	-18.75	peak	
2	*	11160.00	41.42	2.93	44.35	54.00	-9.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5580MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

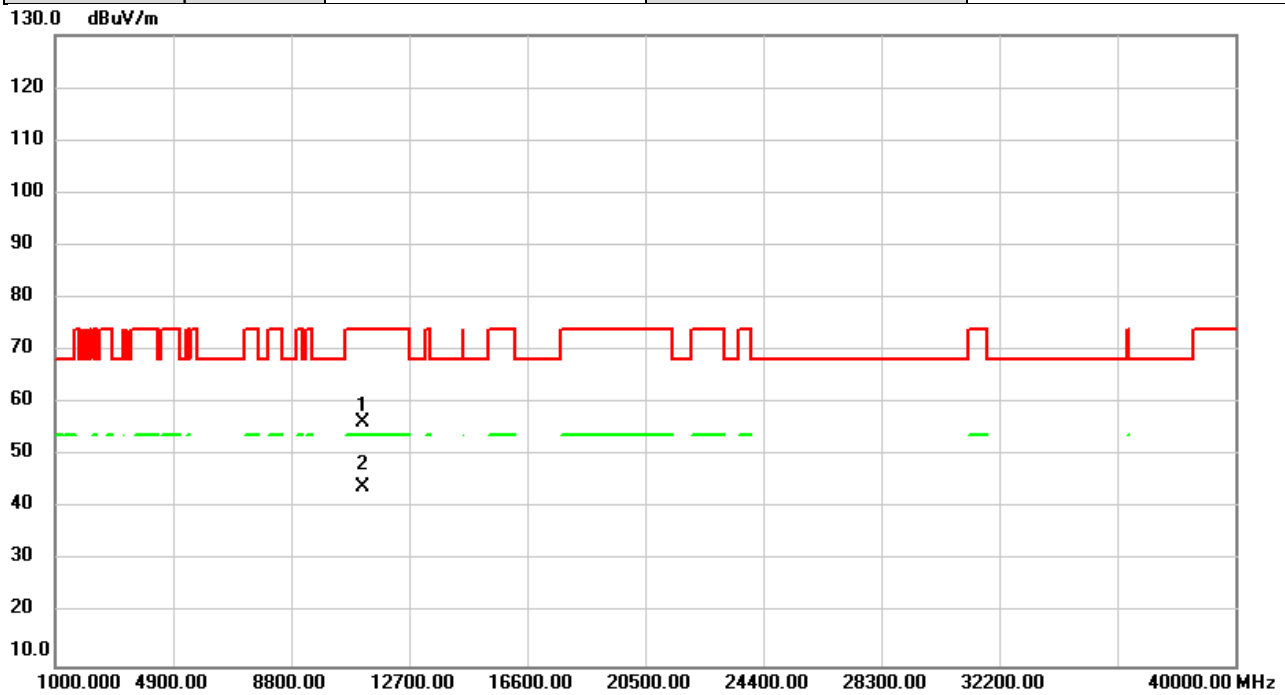


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	53.40	2.93	56.33	74.00	-17.67	peak	
2	*	11160.00	41.21	2.93	44.14	54.00	-9.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5700MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

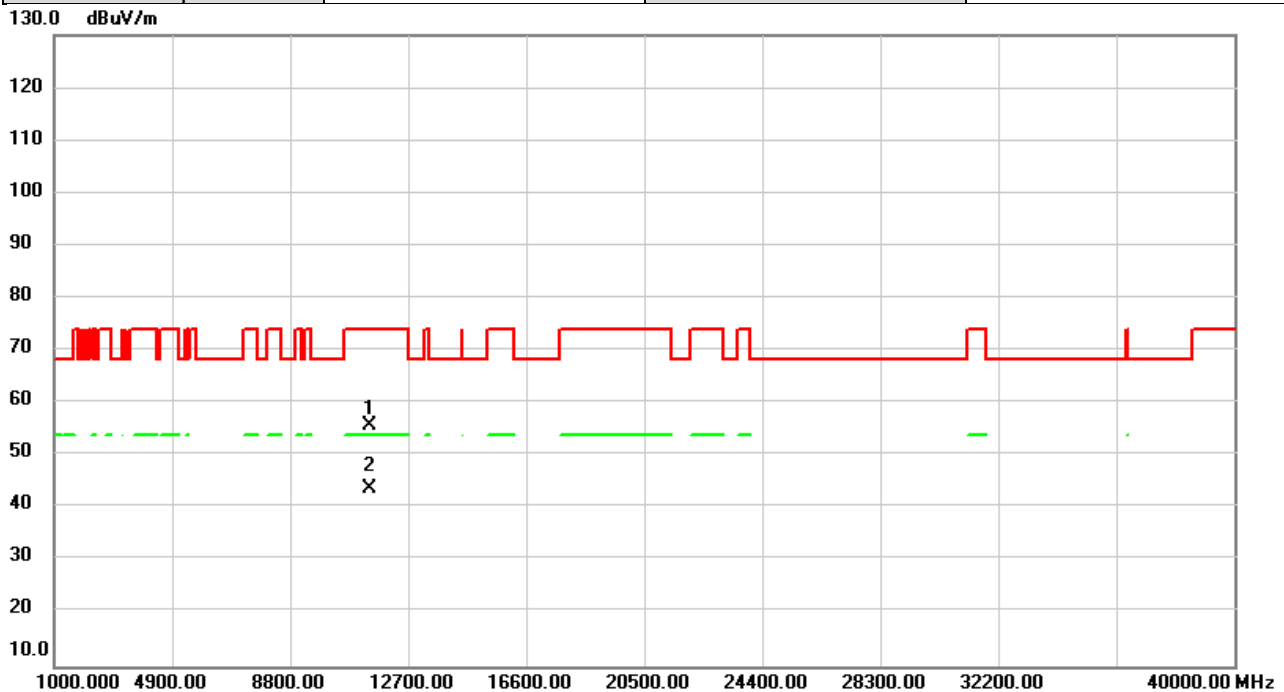


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	53.44	2.44	55.88	74.00	-18.12	peak	
2	*	11400.00	41.45	2.44	43.89	54.00	-10.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5700MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

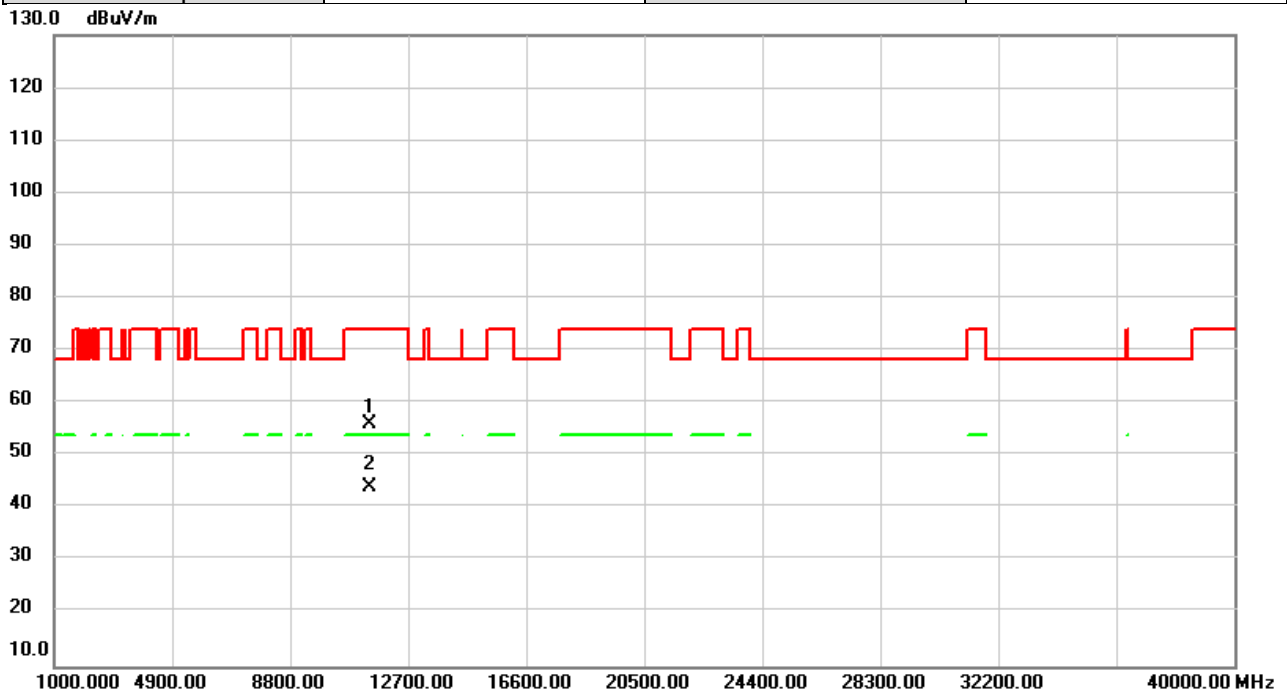


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	53.59	2.44	56.03	74.00	-17.97	peak	
2	*	11400.00	41.50	2.44	43.94	54.00	-10.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5720MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

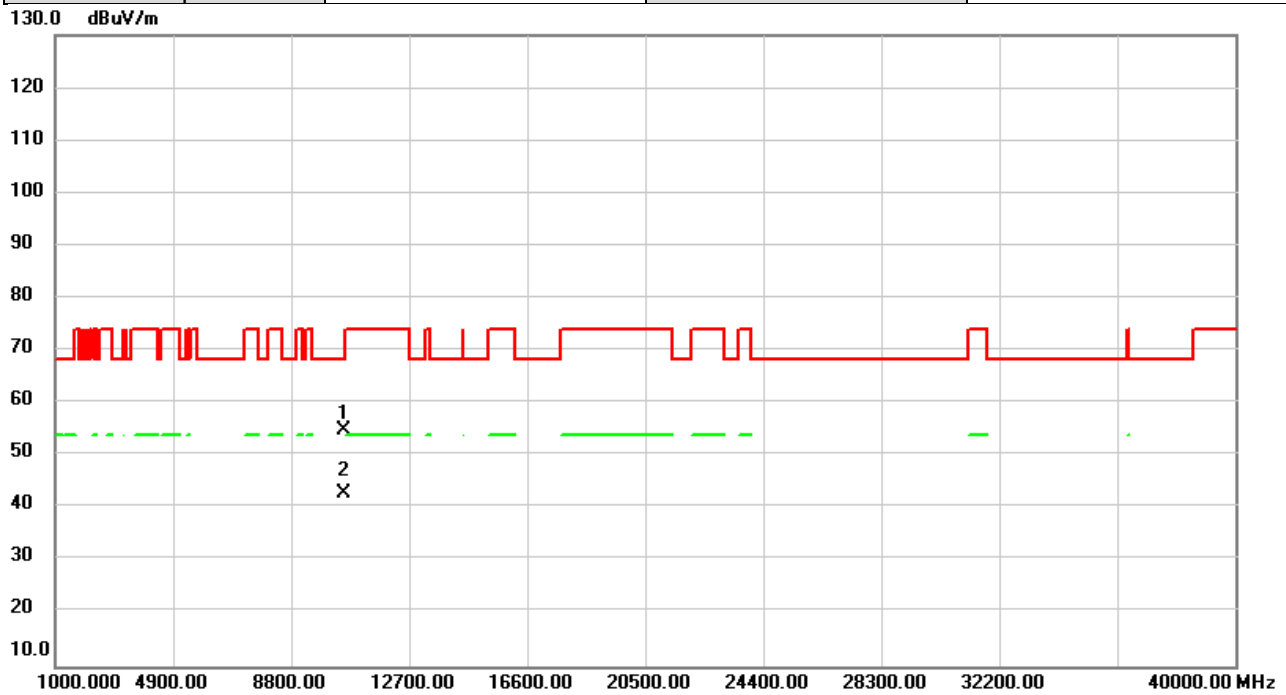


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	53.09	1.73	54.82	68.20	-13.38	peak	
2		10540.00	41.13	1.73	42.86	68.20	-25.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5720MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

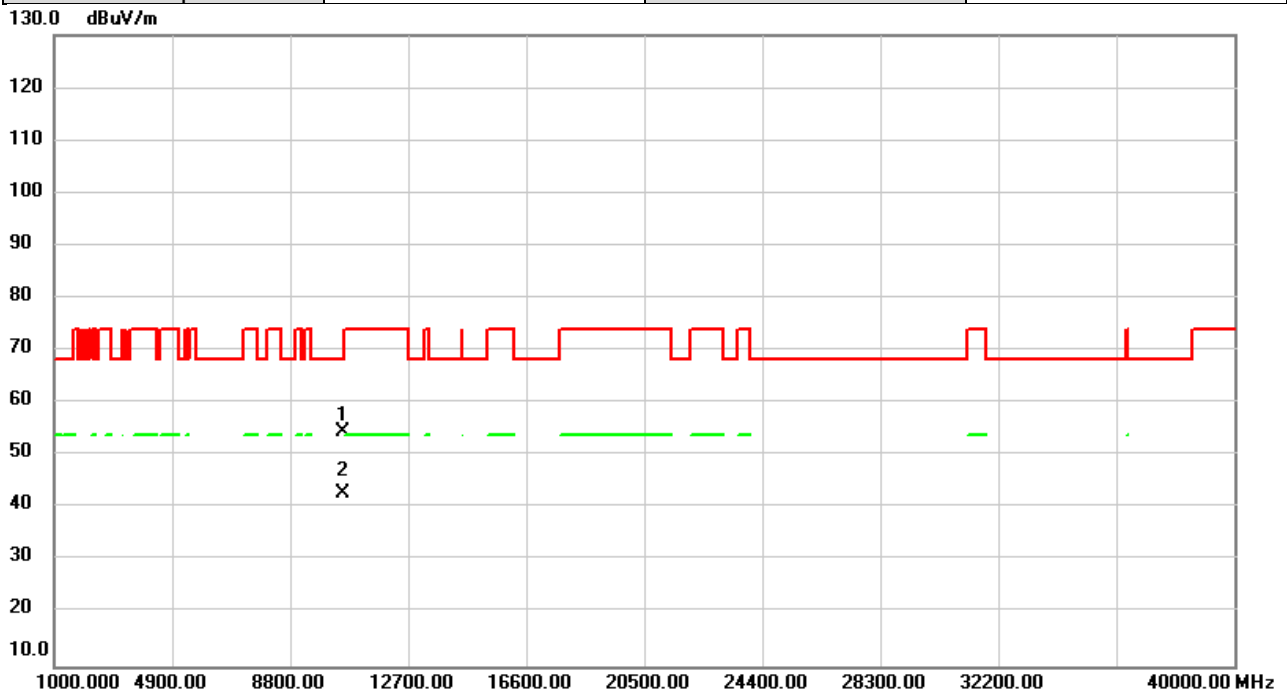


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	52.75	1.73	54.48	68.20	-13.72	peak	
2		10540.00	41.08	1.73	42.81	68.20	-25.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5745MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

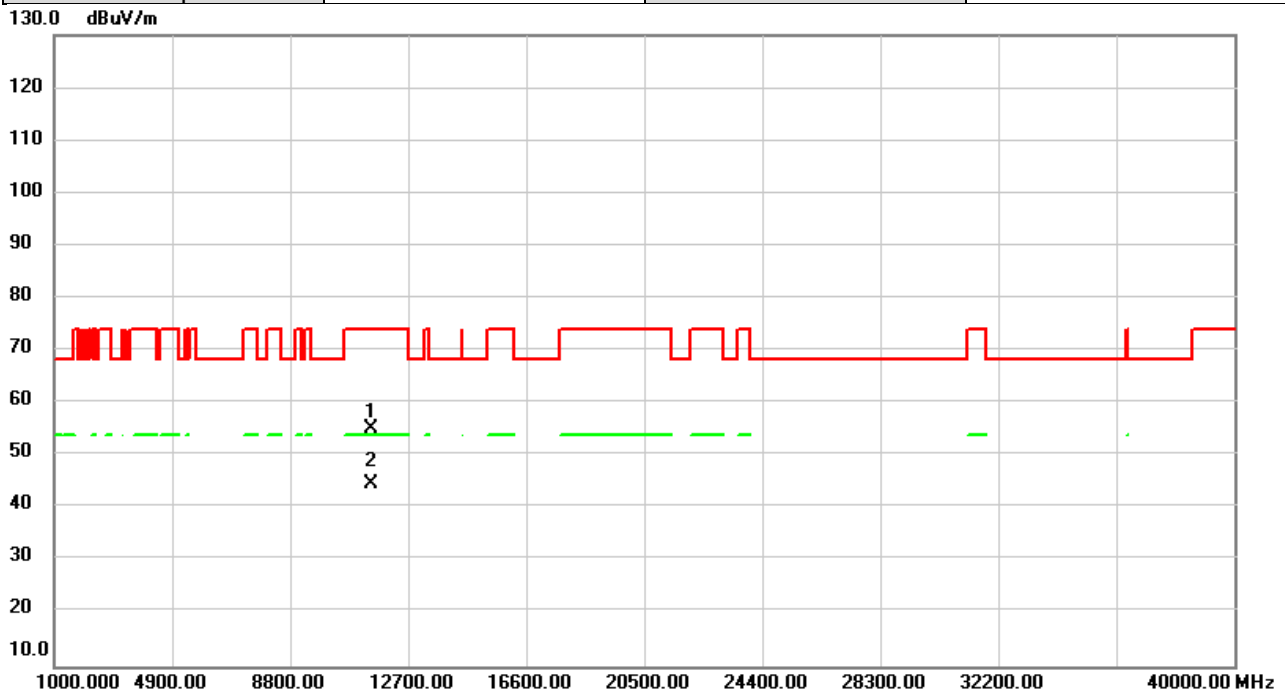


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	52.88	2.26	55.14	74.00	-18.86	peak	
2	*	11490.00	42.41	2.26	44.67	54.00	-9.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5745MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

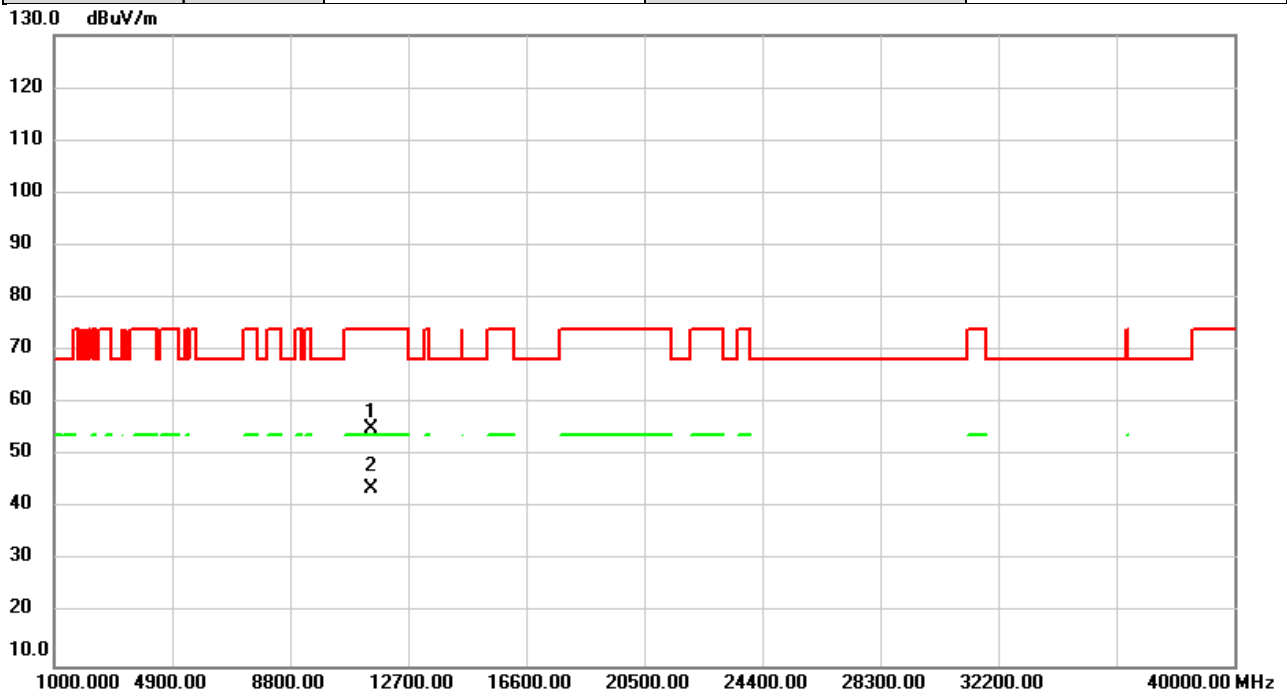


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	52.87	2.26	55.13	74.00	-18.87	peak	
2	*	11490.00	41.58	2.26	43.84	54.00	-10.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5785MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

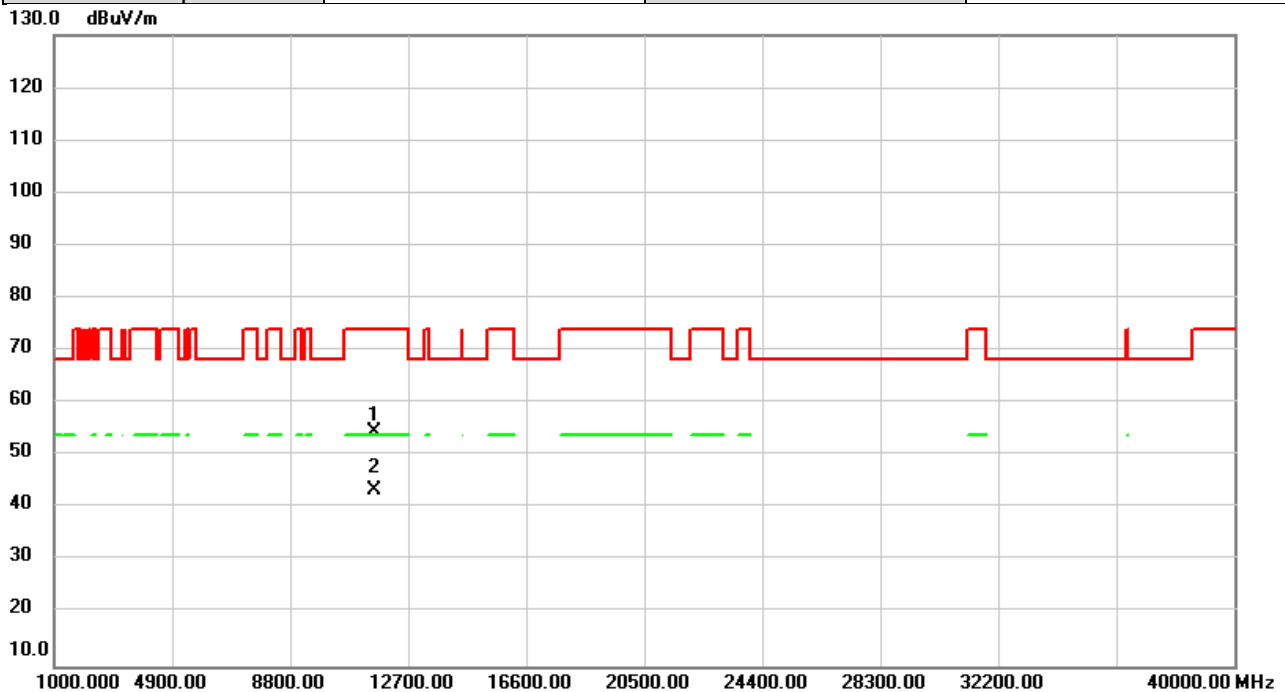


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	52.41	2.07	54.48	74.00	-19.52	peak	
2	*	11570.00	41.26	2.07	43.33	54.00	-10.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5785MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

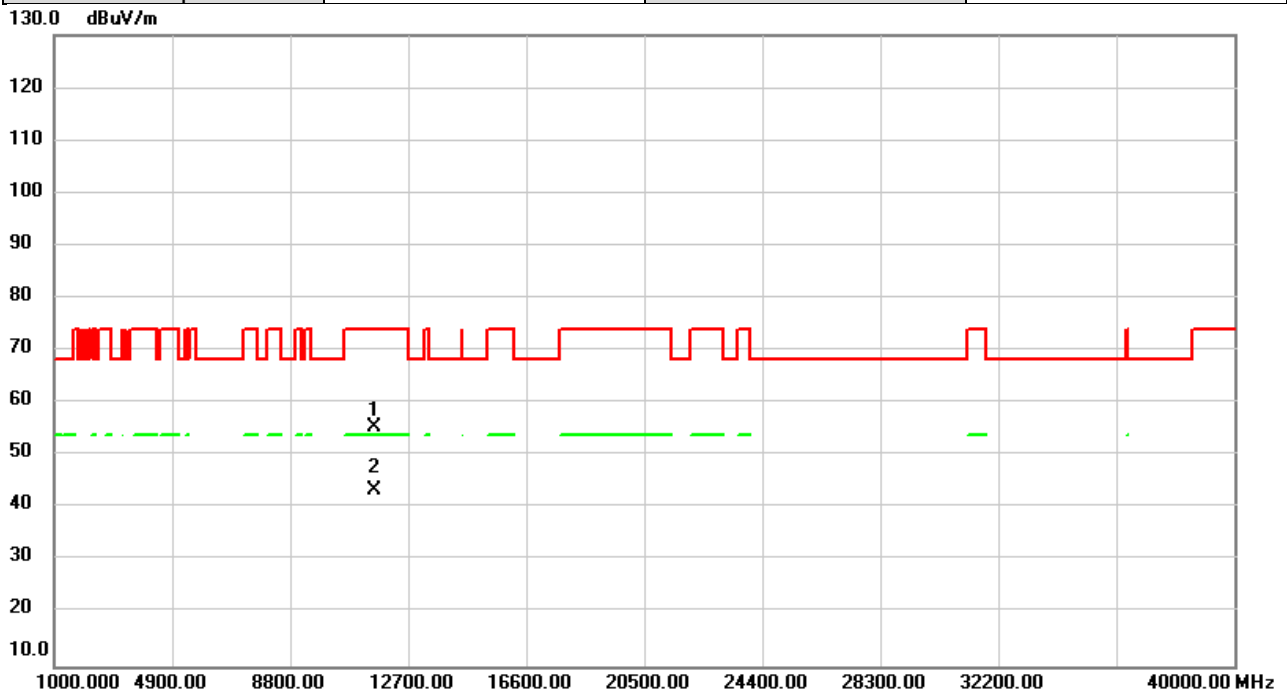


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	53.39	2.07	55.46	74.00	-18.54	peak	
2	*	11570.00	41.39	2.07	43.46	54.00	-10.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5825MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

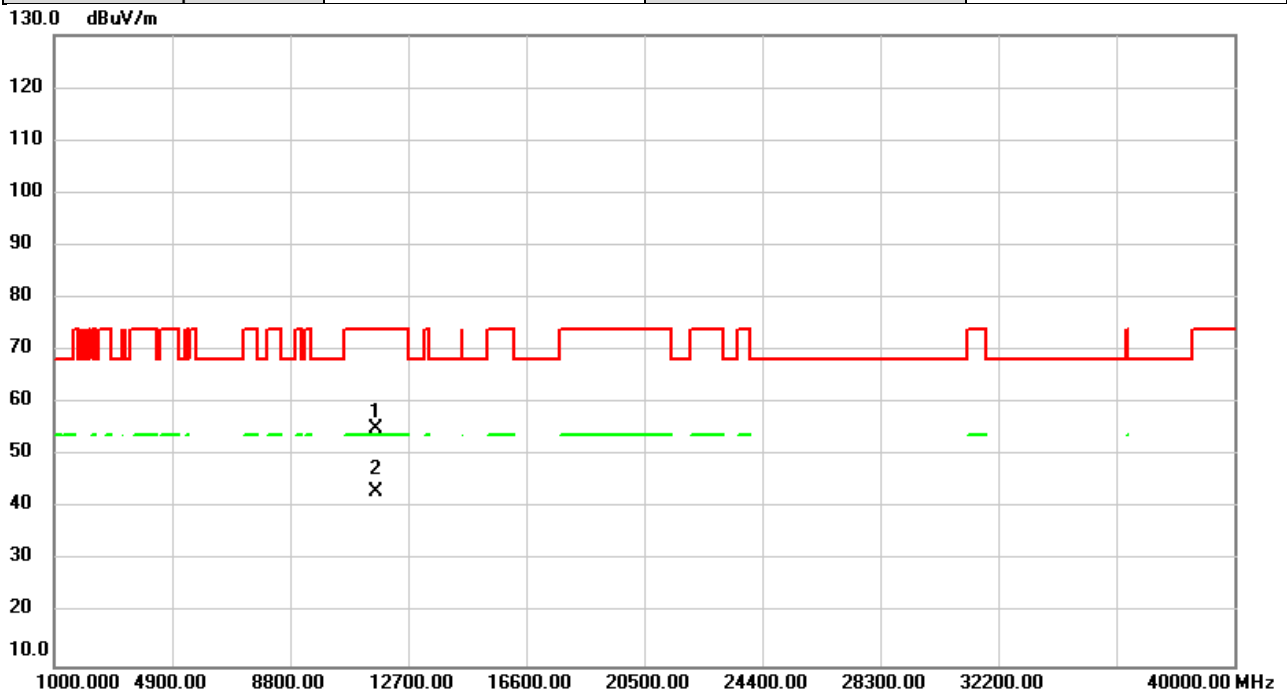


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	53.35	1.86	55.21	74.00	-18.79	peak	
2	*	11650.00	41.35	1.86	43.21	54.00	-10.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2021/12/9
Test Frequency	5825MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

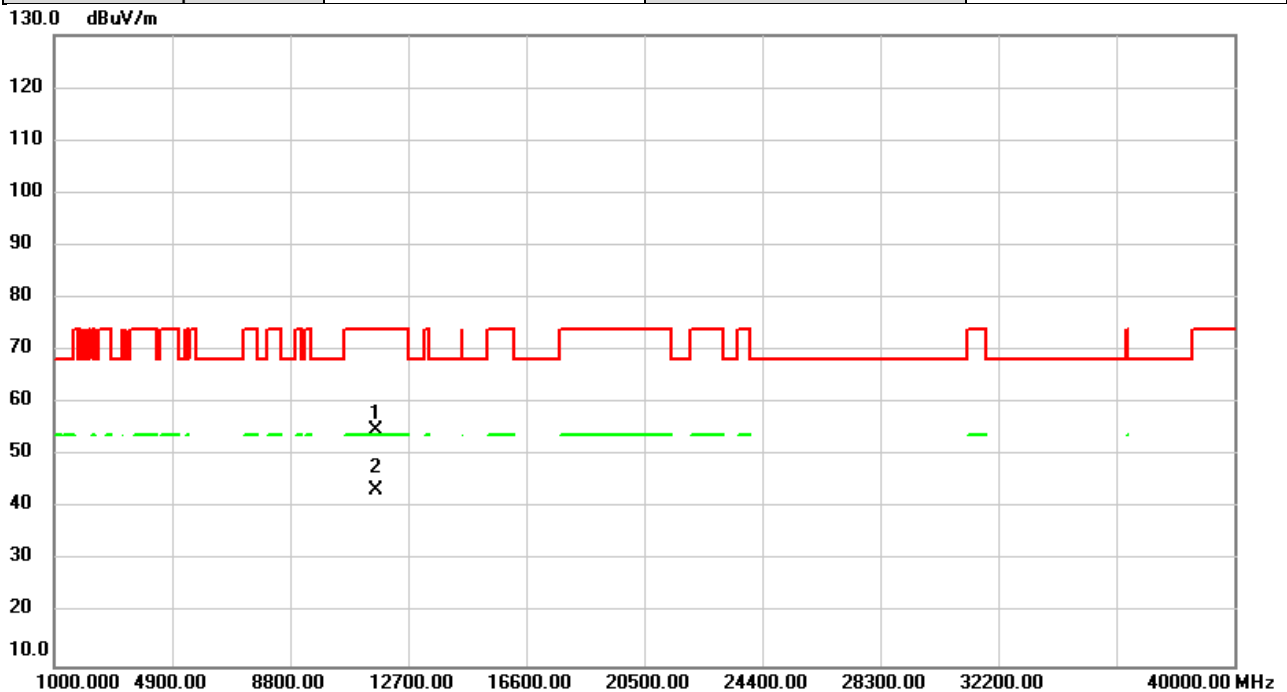


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	53.08	1.86	54.94	74.00	-19.06	peak	
2	*	11650.00	41.48	1.86	43.34	54.00	-10.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5190MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

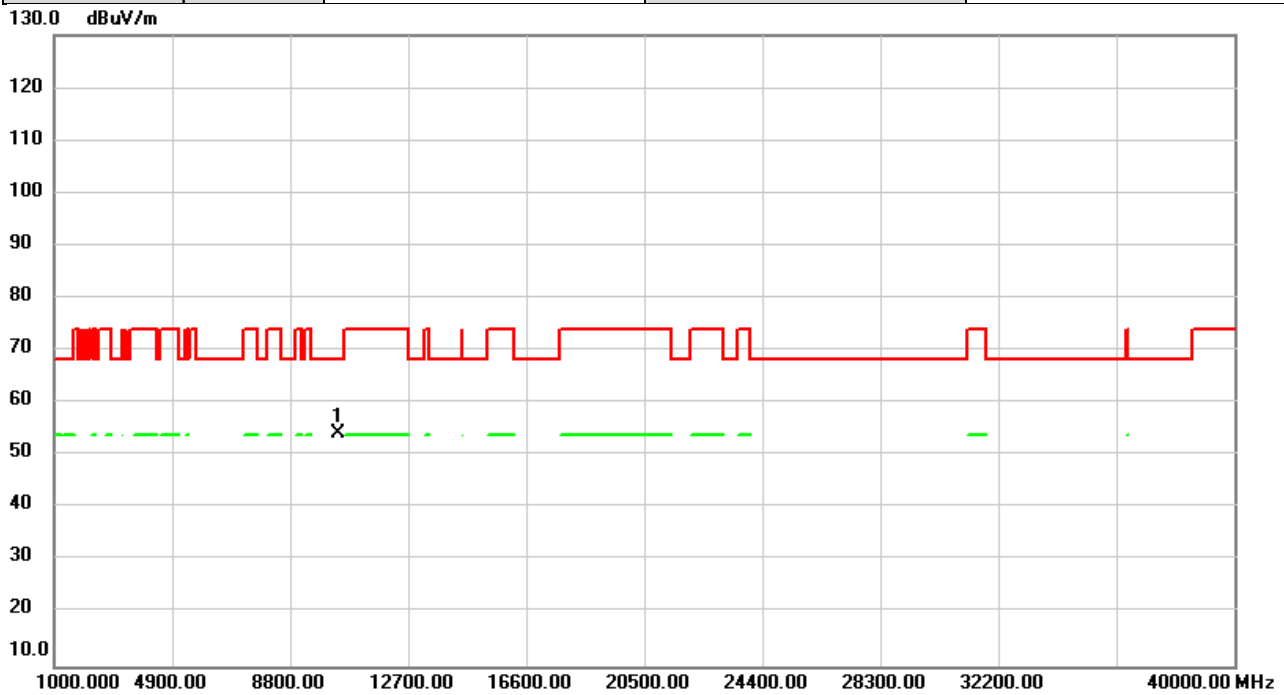


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	52.83	1.33	54.16	68.20	-14.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5190MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

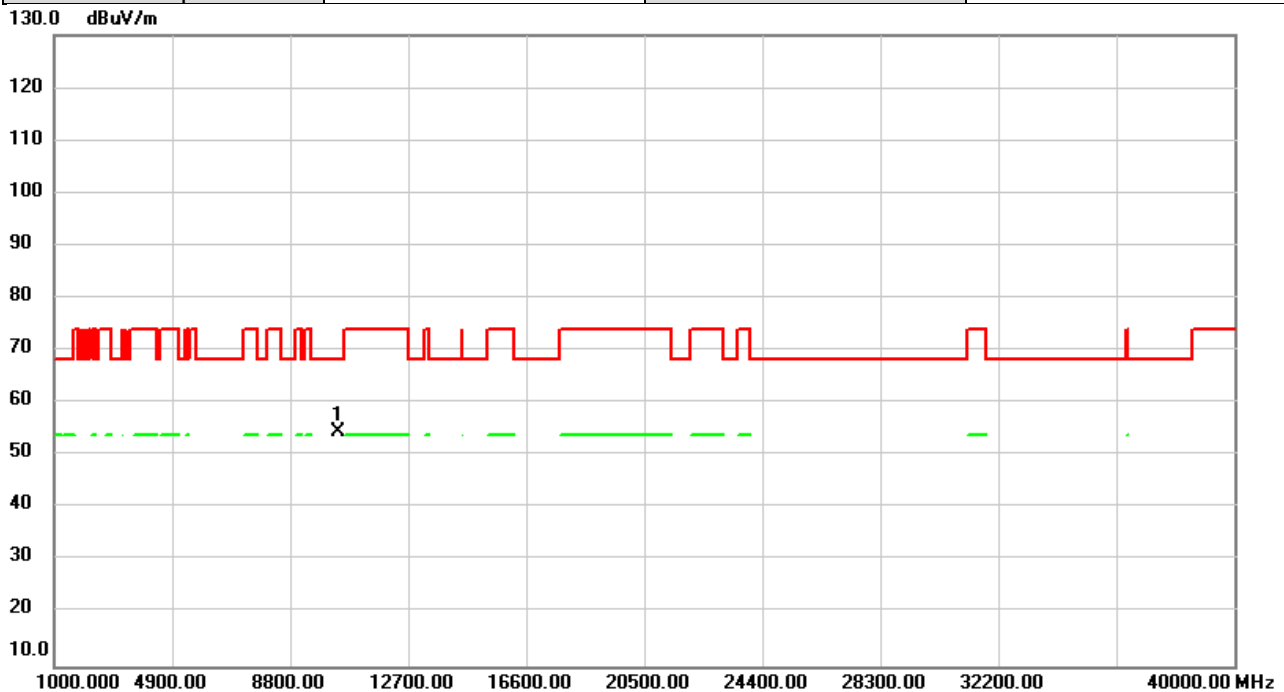


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	53.20	1.33	54.53	68.20	-13.67	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5230MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

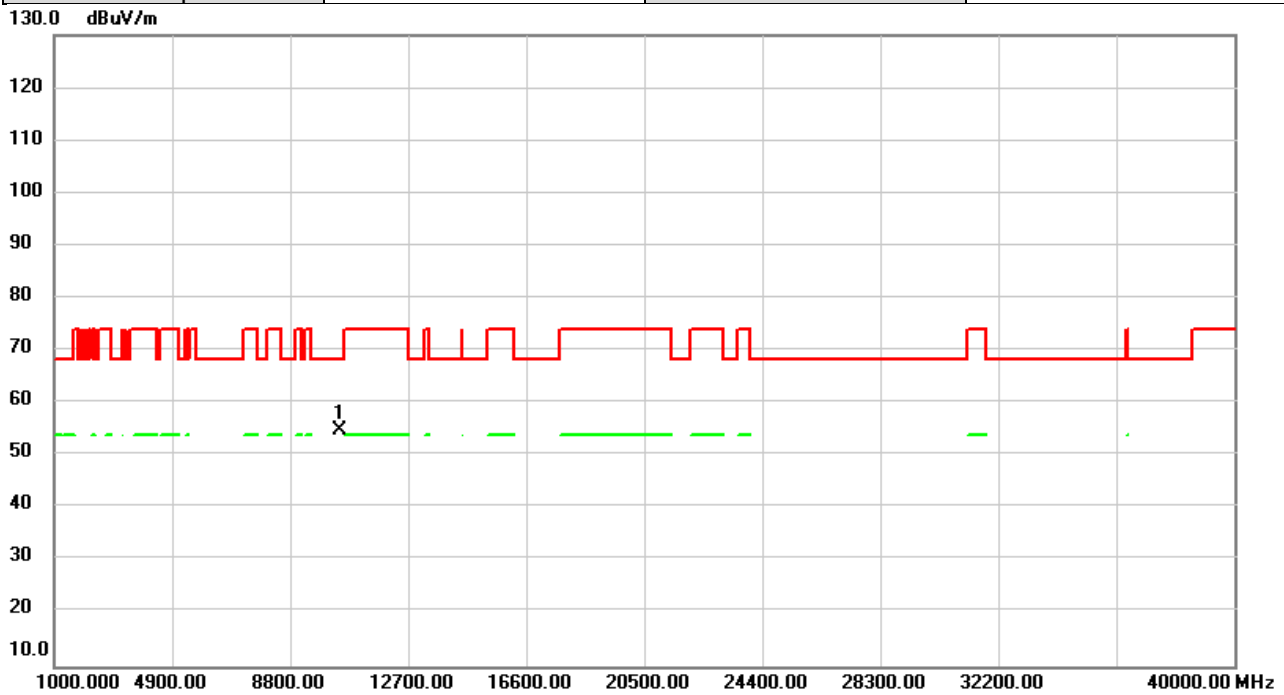


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	53.21	1.51	54.72	68.20	-13.48	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5230MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

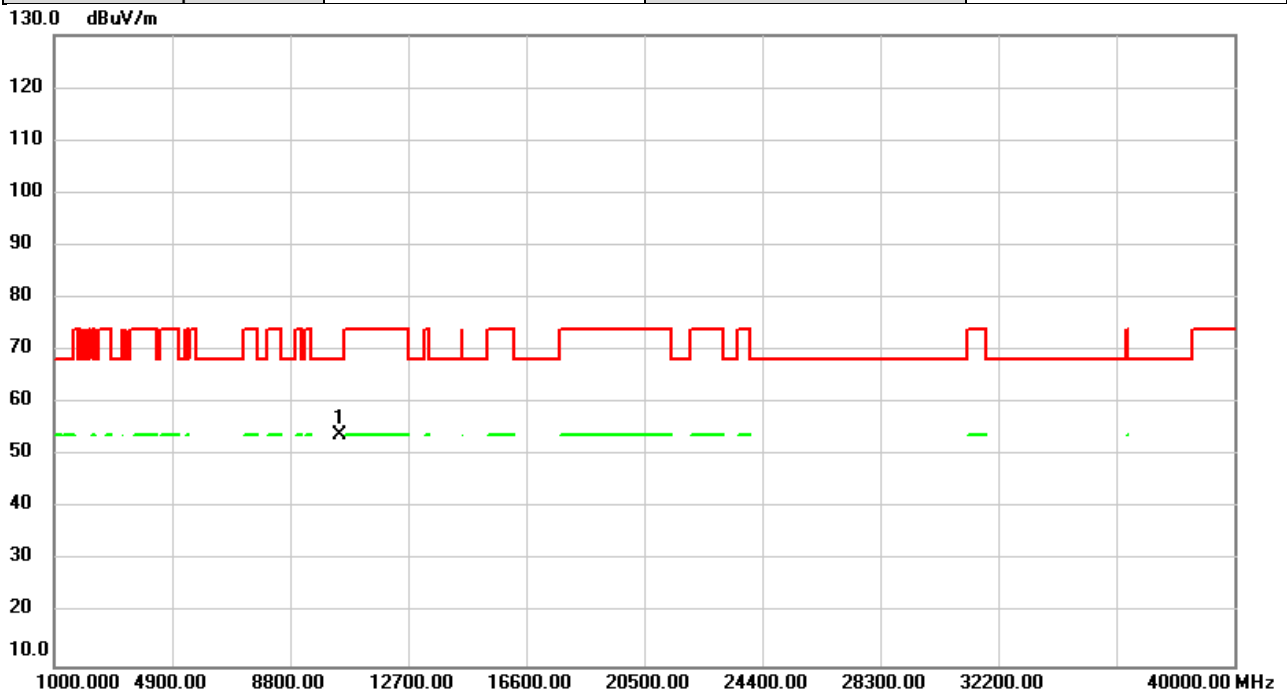


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	52.42	1.51	53.93	68.20	-14.27	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5270MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

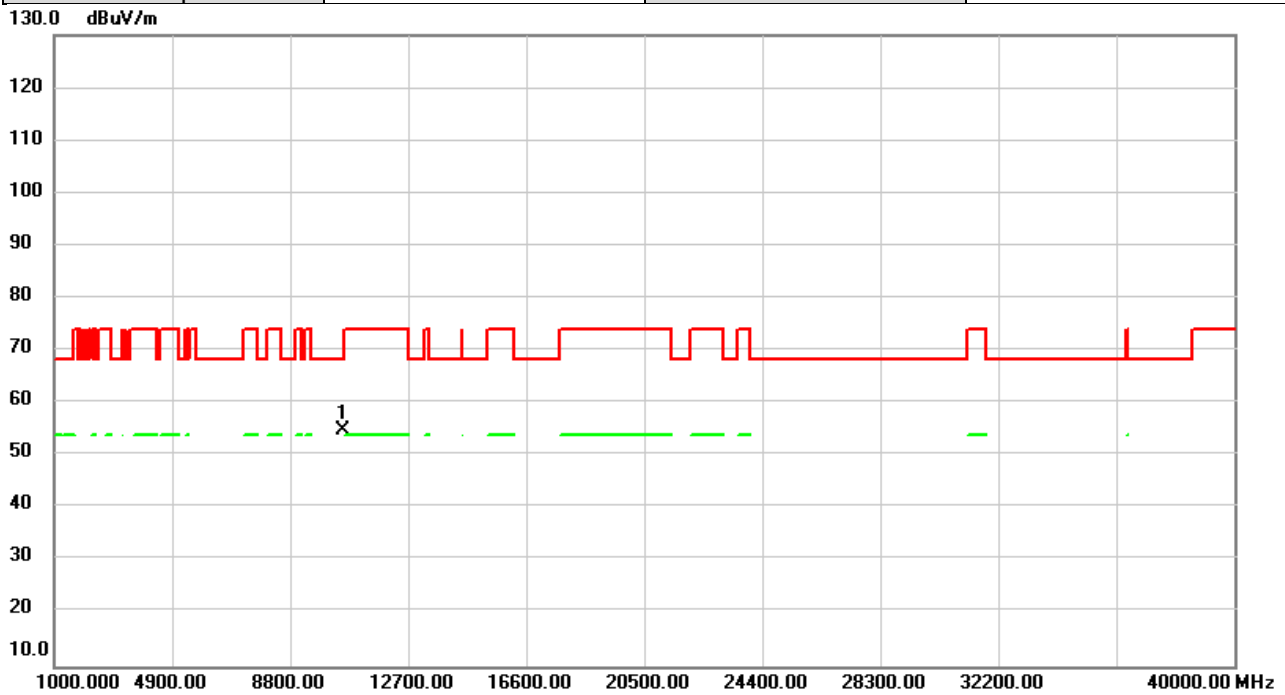


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	53.13	1.73	54.86	68.20	-13.34	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5270MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

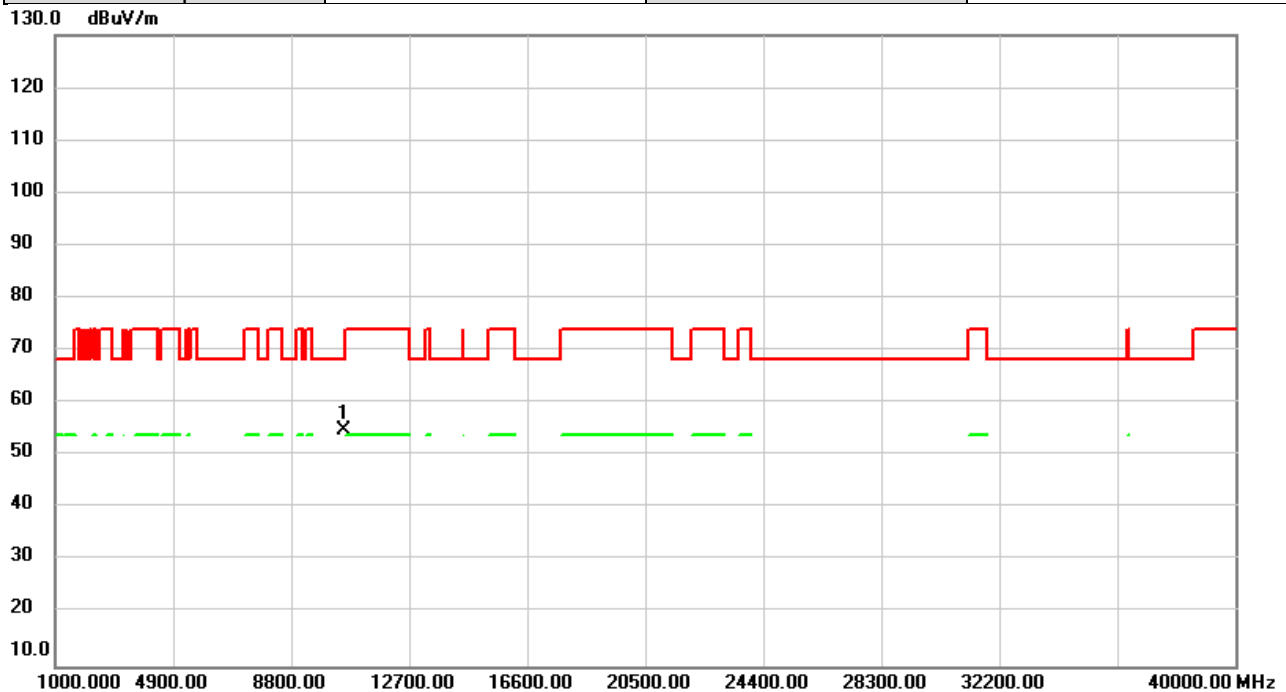


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	53.25	1.73	54.98	68.20	-13.22	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5310MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

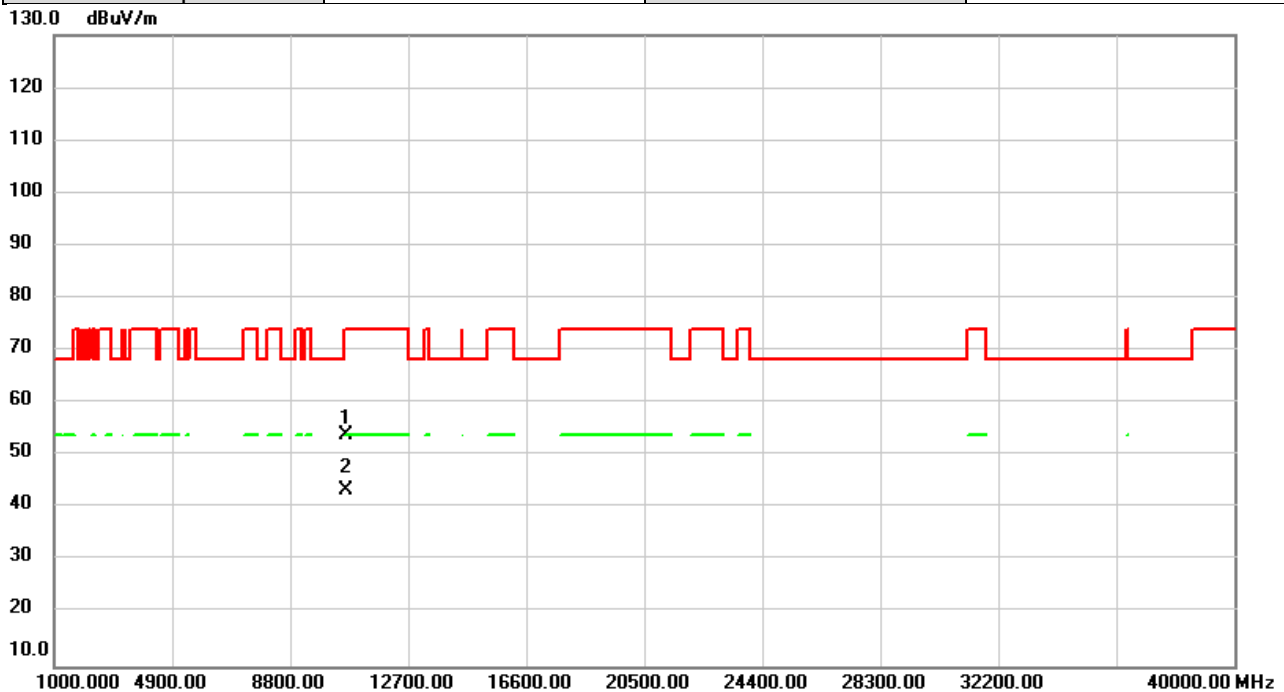


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	52.07	1.99	54.06	74.00	-19.94	peak	
2	*	10620.00	41.52	1.99	43.51	54.00	-10.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5310MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

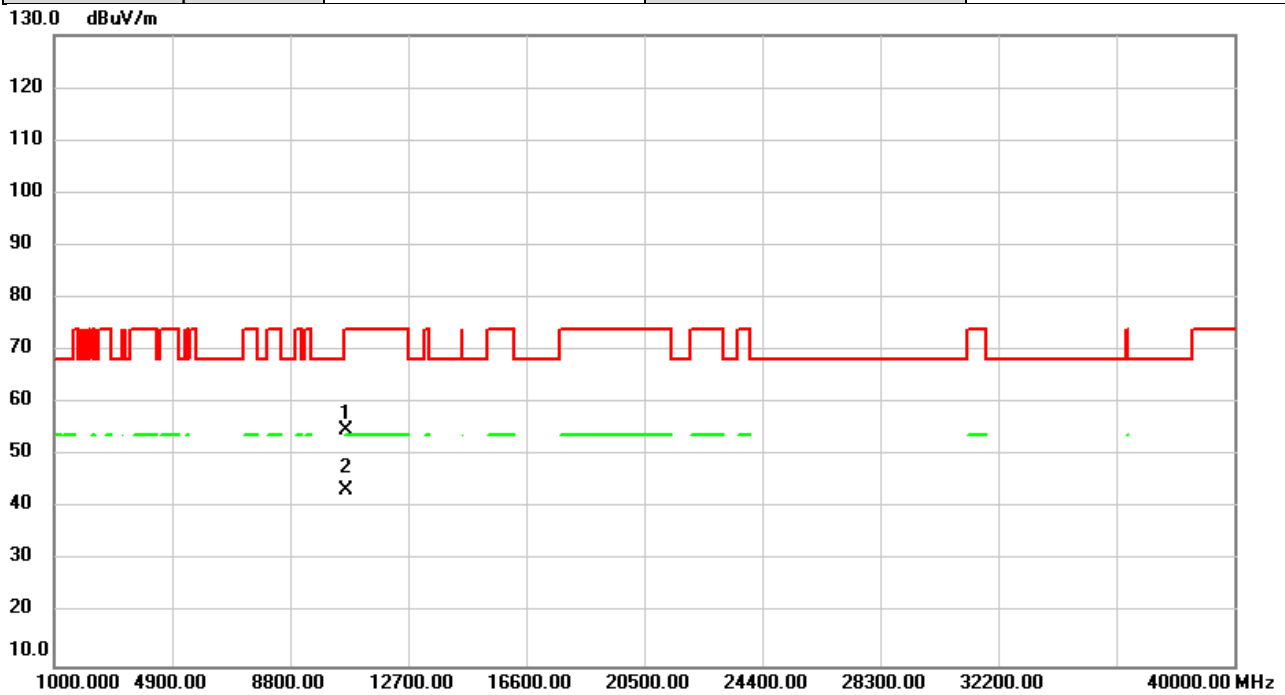


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	52.82	1.99	54.81	74.00	-19.19	peak	
2	*	10620.00	41.43	1.99	43.42	54.00	-10.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5510MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

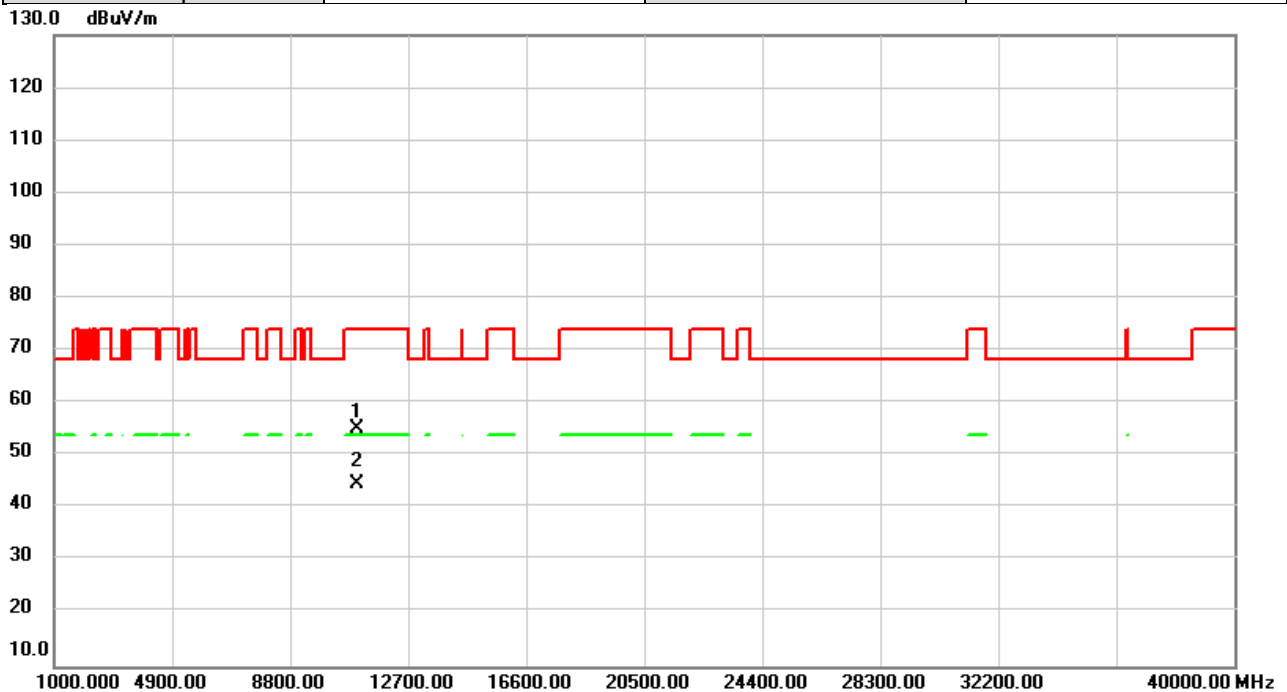


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	51.79	3.23	55.02	74.00	-18.98	peak	
2	*	11020.00	41.32	3.23	44.55	54.00	-9.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5510MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

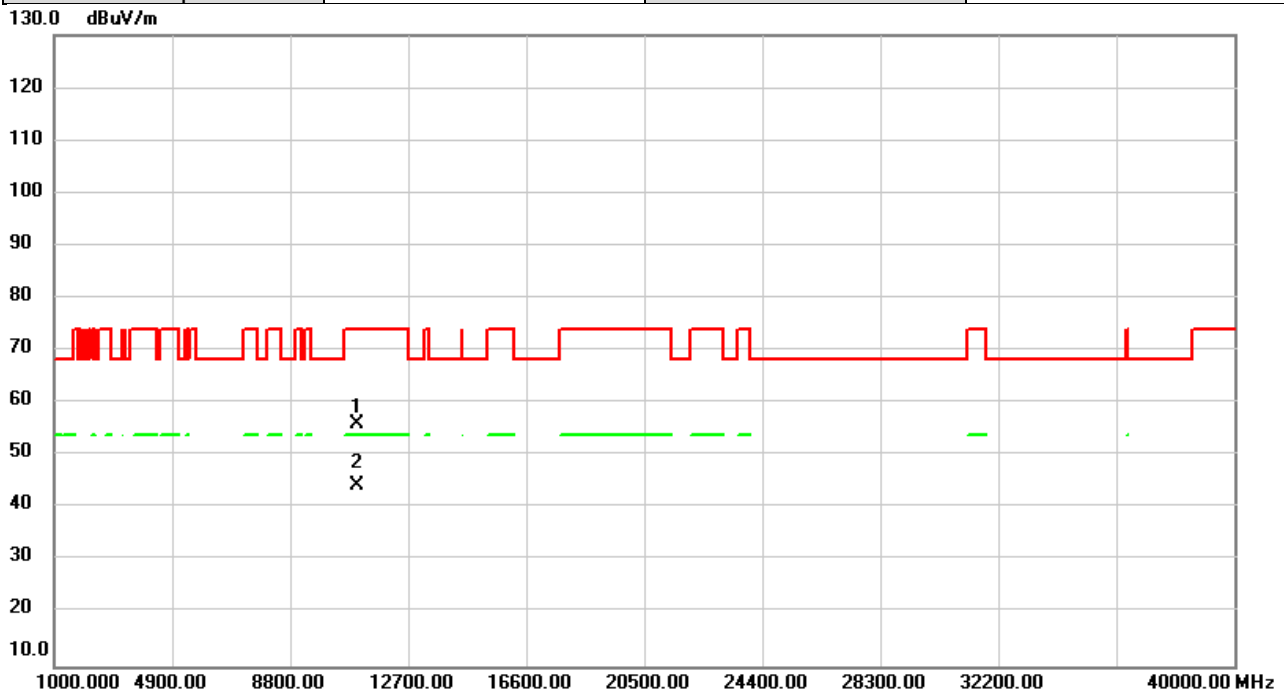


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	52.87	3.23	56.10	74.00	-17.90	peak	
2	*	11020.00	41.05	3.23	44.28	54.00	-9.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5550MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

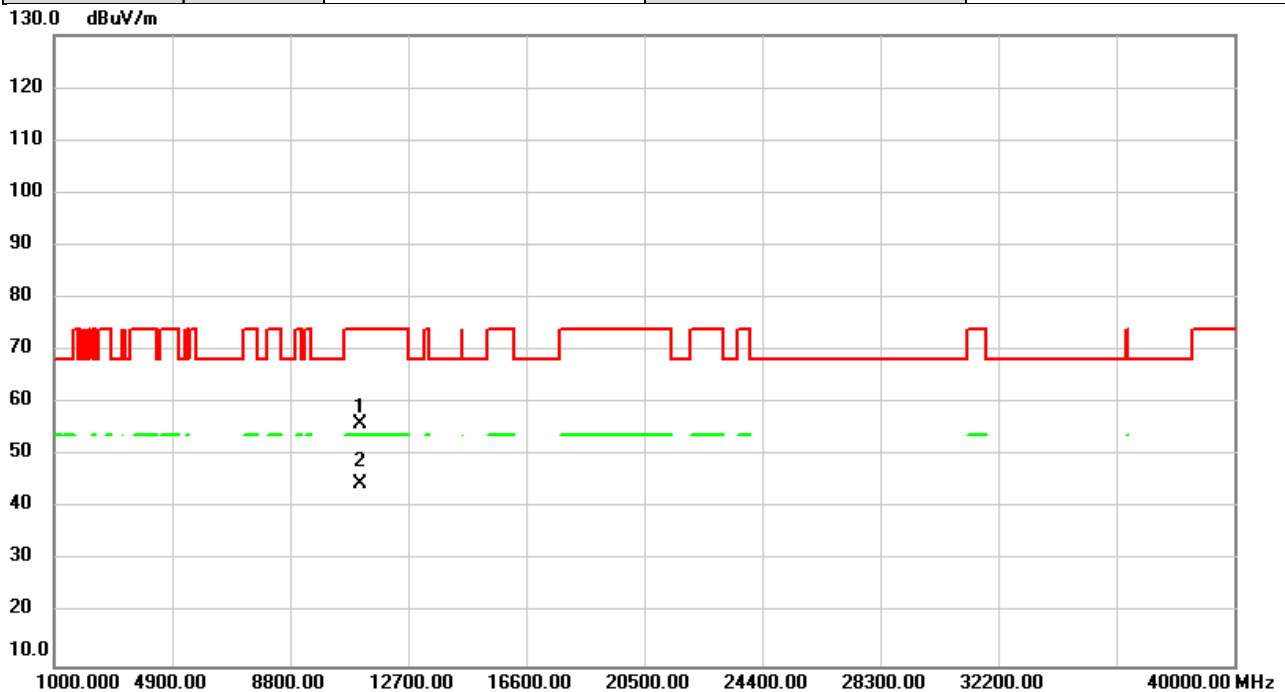


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	52.93	3.07	56.00	74.00	-18.00	peak	
2	*	11100.00	41.55	3.07	44.62	54.00	-9.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5550MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

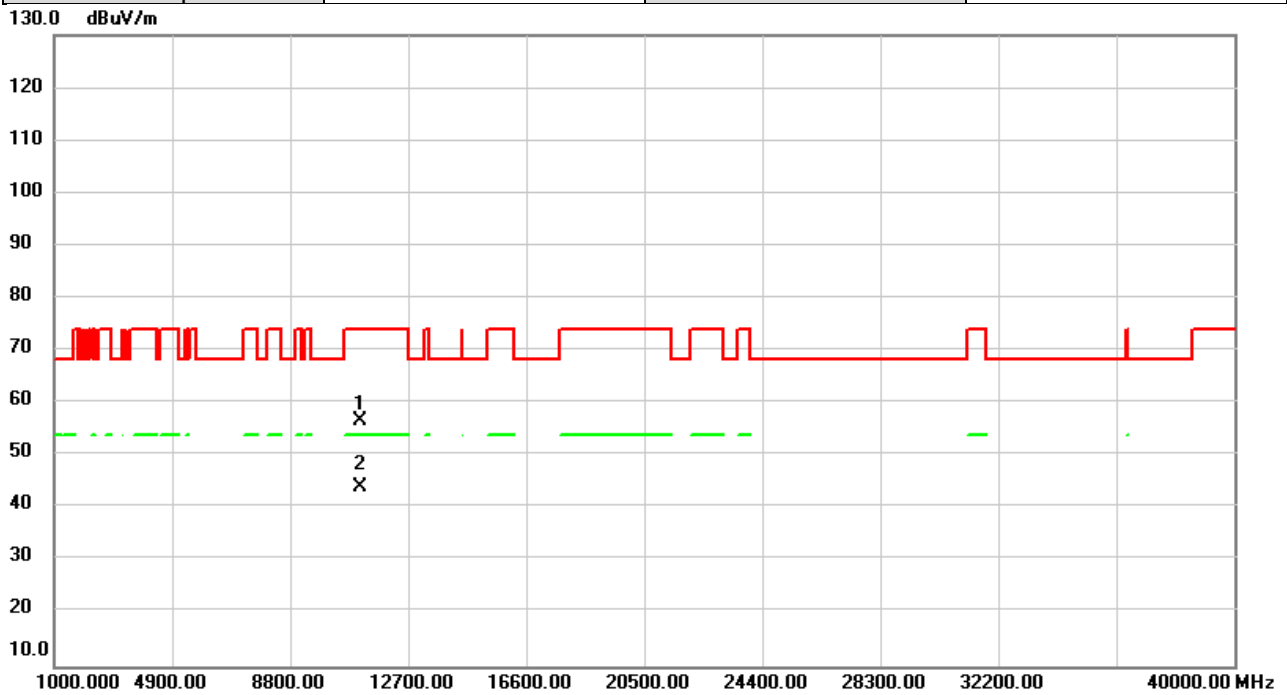


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	53.50	3.07	56.57	74.00	-17.43	peak	
2	*	11100.00	41.01	3.07	44.08	54.00	-9.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5670MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

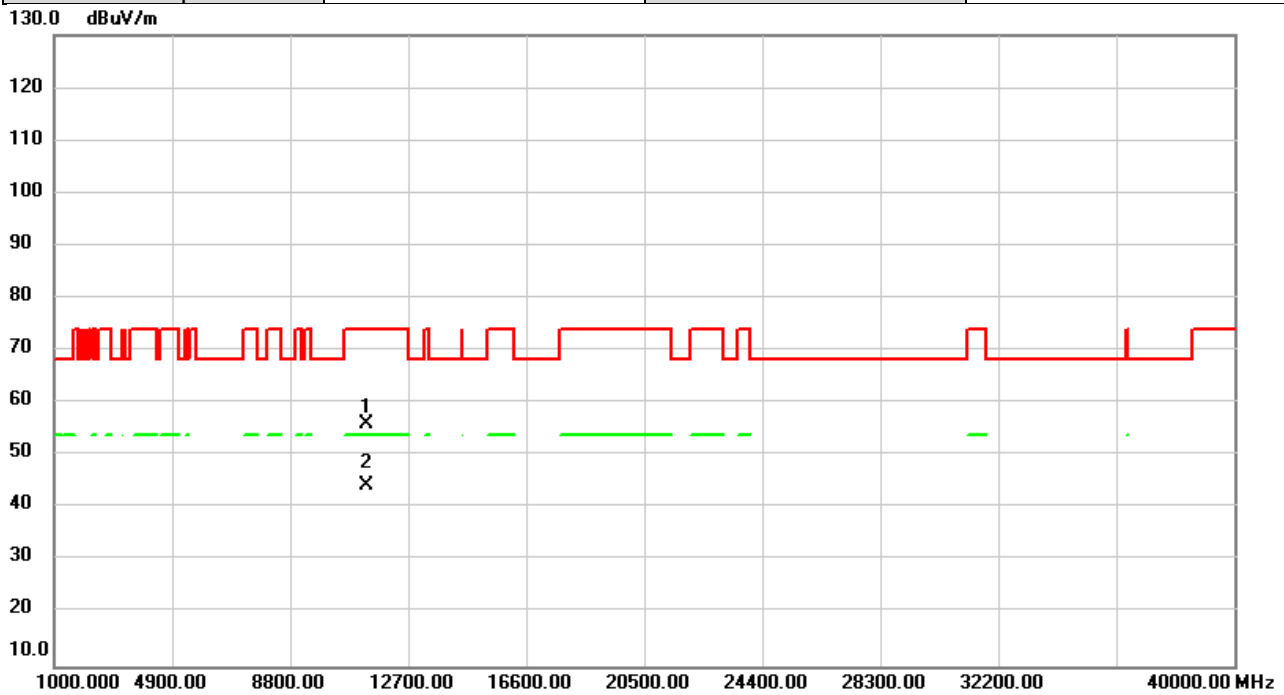


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	53.45	2.58	56.03	74.00	-17.97	peak	
2	*	11340.00	41.62	2.58	44.20	54.00	-9.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5670MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

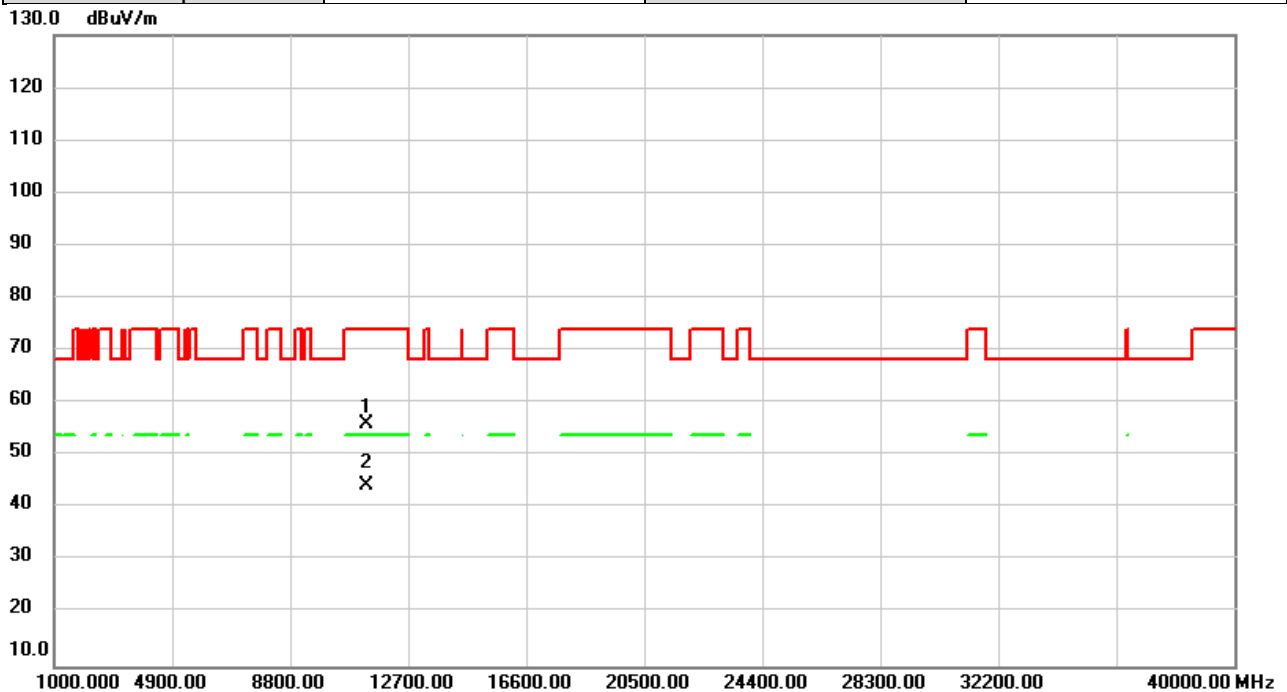


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	53.33	2.58	55.91	74.00	-18.09	peak	
2	*	11340.00	41.72	2.58	44.30	54.00	-9.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5710MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

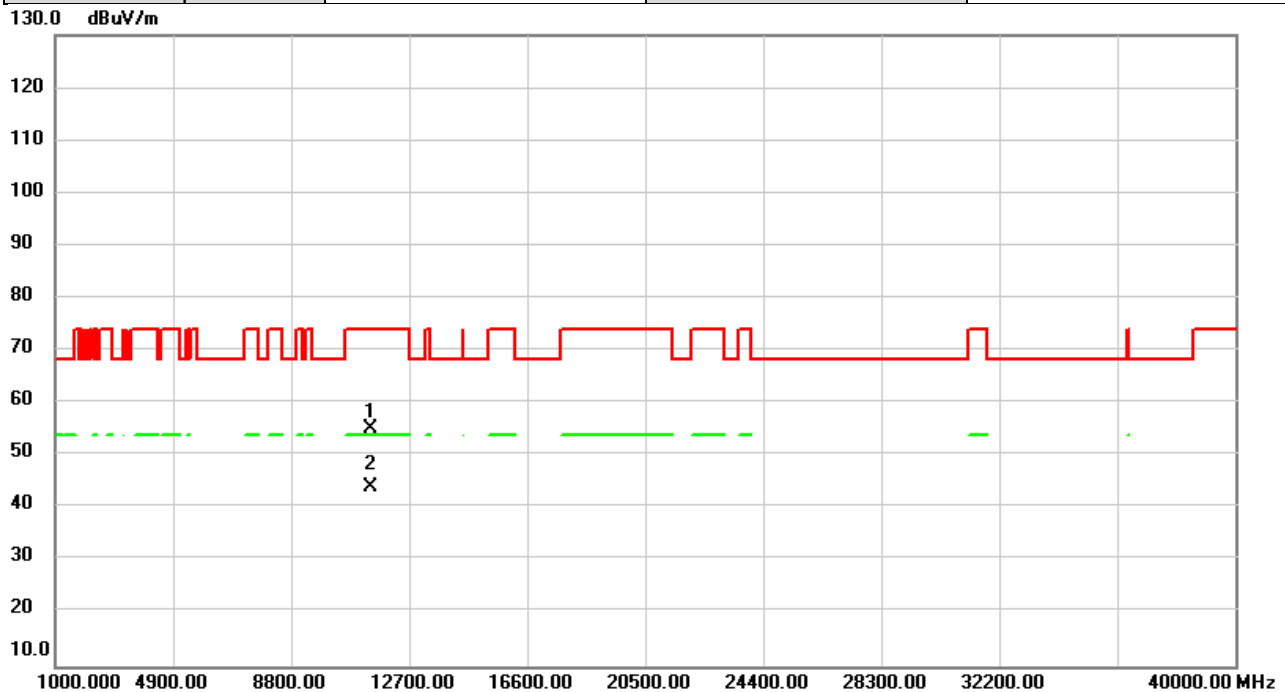


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11420.00	52.72	2.40	55.12	74.00	-18.88	peak	
2	*	11420.00	41.67	2.40	44.07	54.00	-9.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5710MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

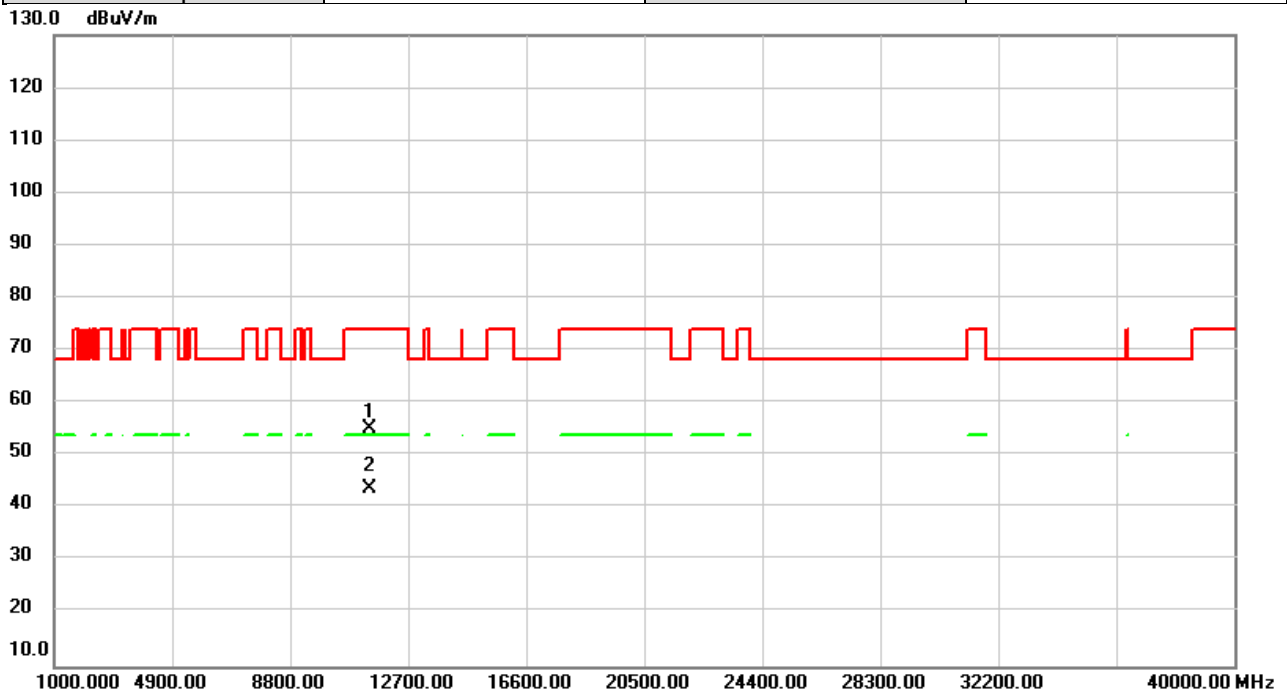


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11420.00	52.90	2.40	55.30	74.00	-18.70	peak	
2	*	11420.00	41.47	2.40	43.87	54.00	-10.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5755MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

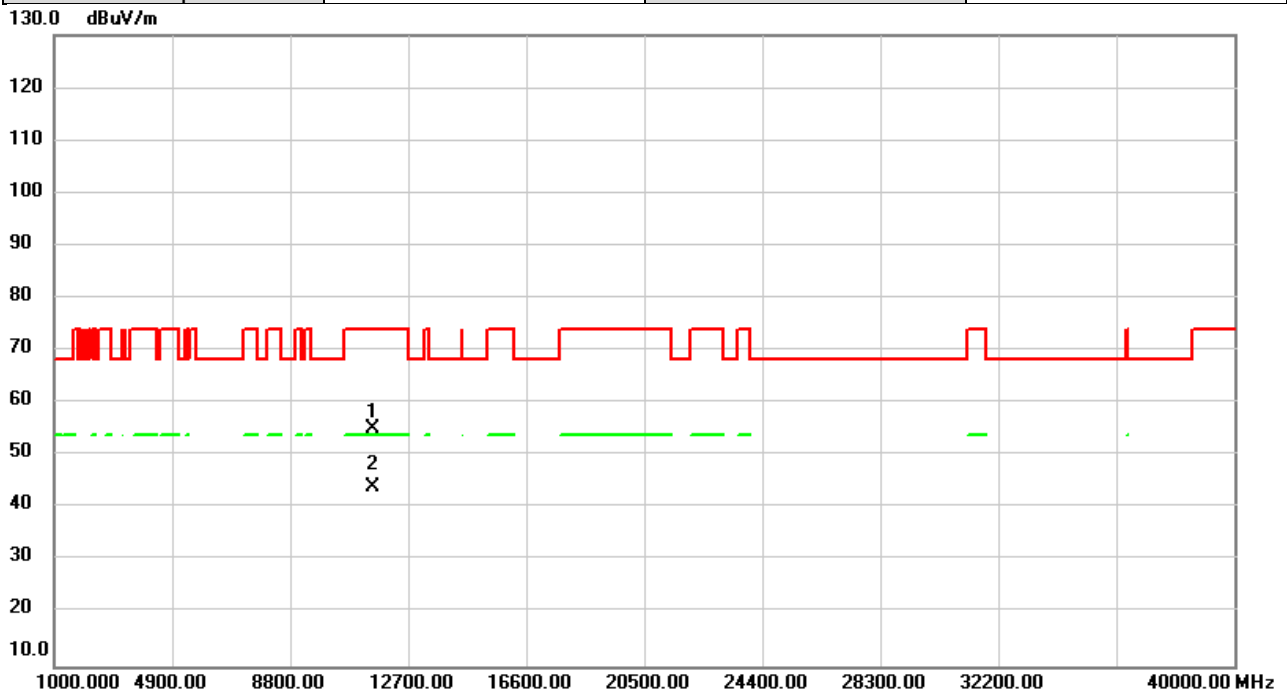


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	52.87	2.22	55.09	74.00	-18.91	peak	
2	*	11510.00	41.94	2.22	44.16	54.00	-9.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5755MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

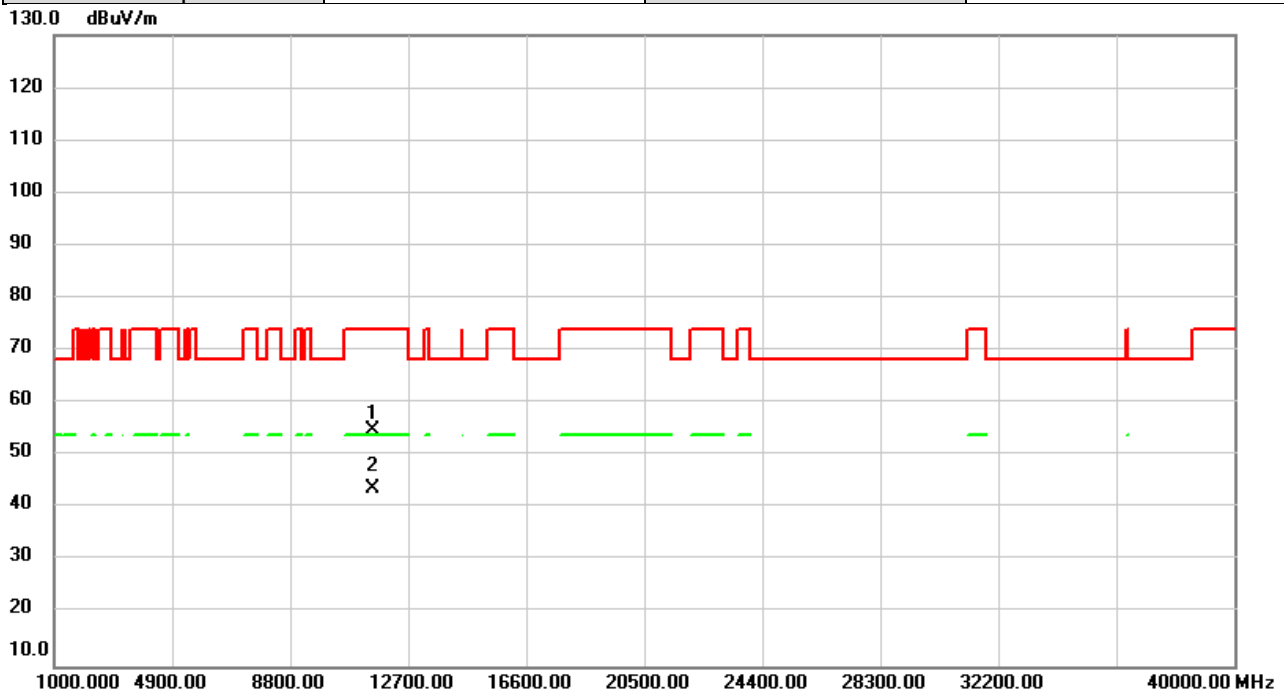


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	52.53	2.22	54.75	74.00	-19.25	peak	
2	*	11510.00	41.42	2.22	43.64	54.00	-10.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5795MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

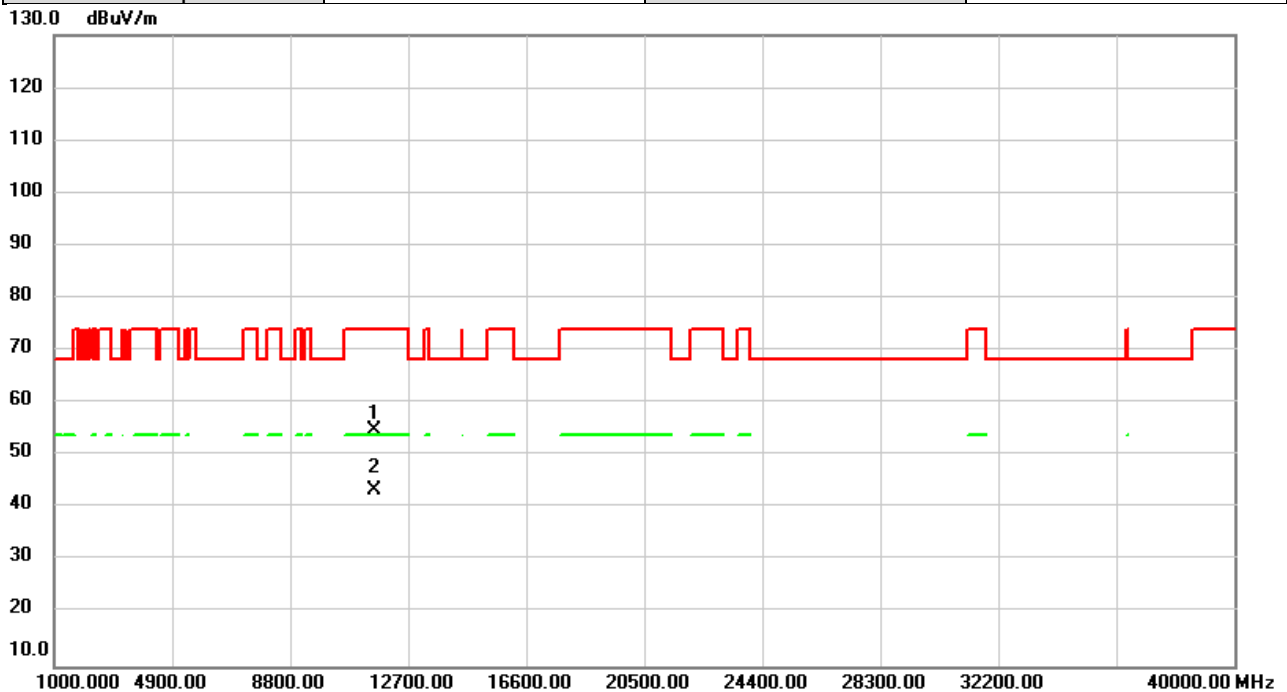


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	52.99	2.00	54.99	74.00	-19.01	peak	
2	*	11590.00	41.54	2.00	43.54	54.00	-10.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2021/12/9
Test Frequency	5795MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

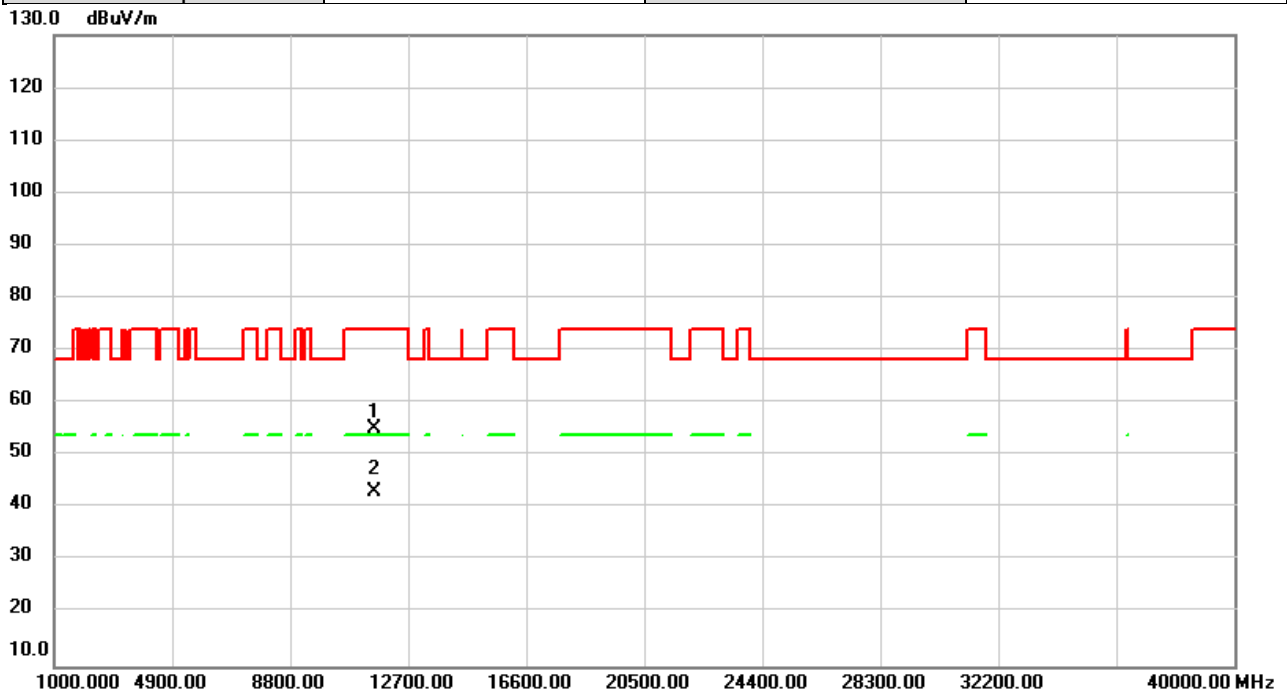


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	53.03	2.00	55.03	74.00	-18.97	peak	
2	*	11590.00	41.24	2.00	43.24	54.00	-10.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5210MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

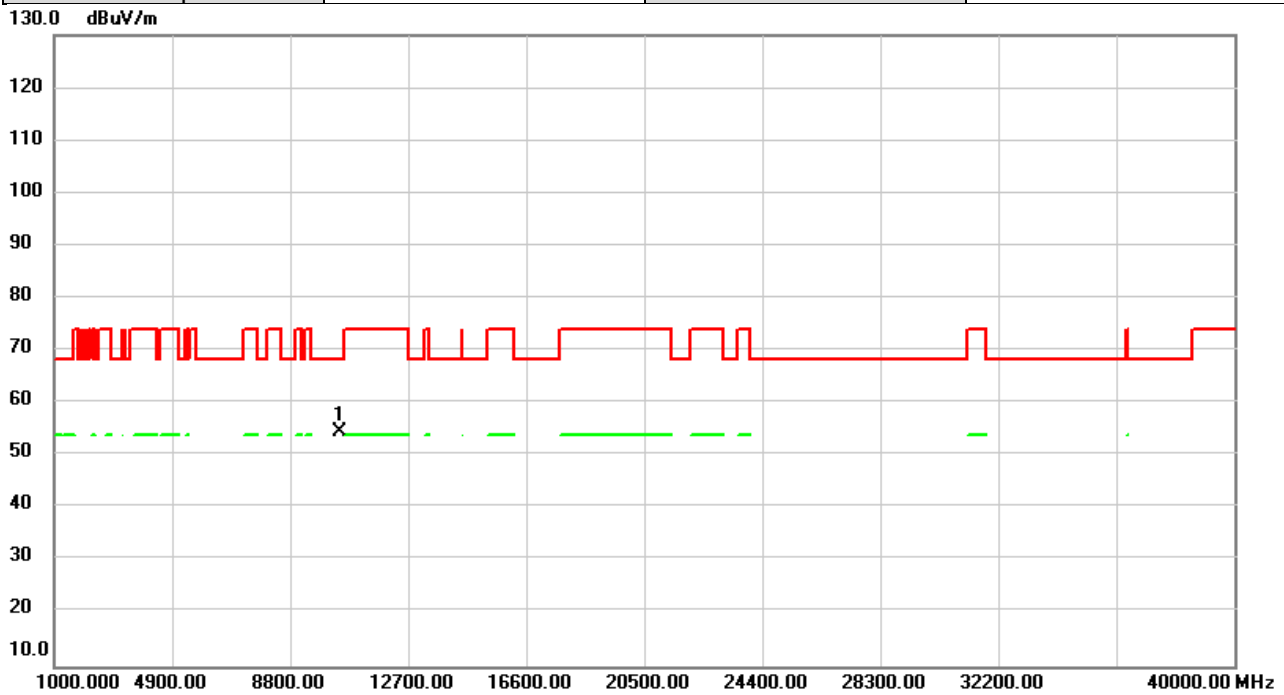


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	53.09	1.42	54.51	68.20	-13.69	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5210MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

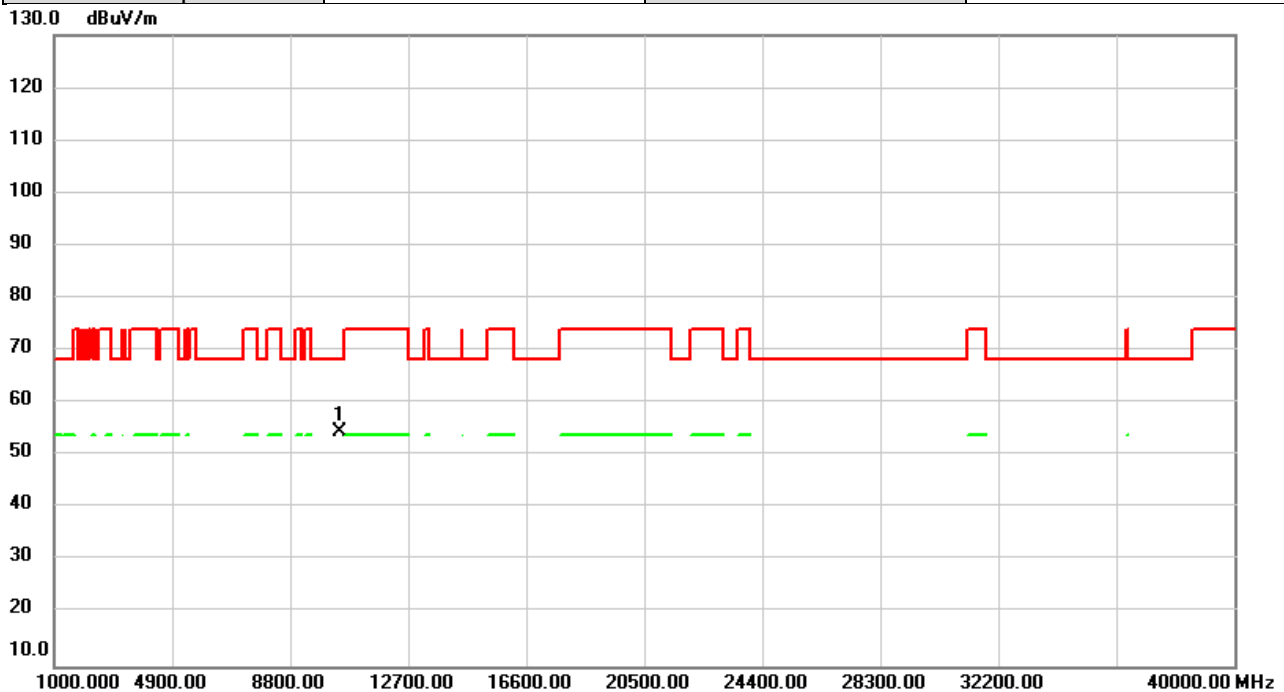


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	53.08	1.42	54.50	68.20	-13.70	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5290MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

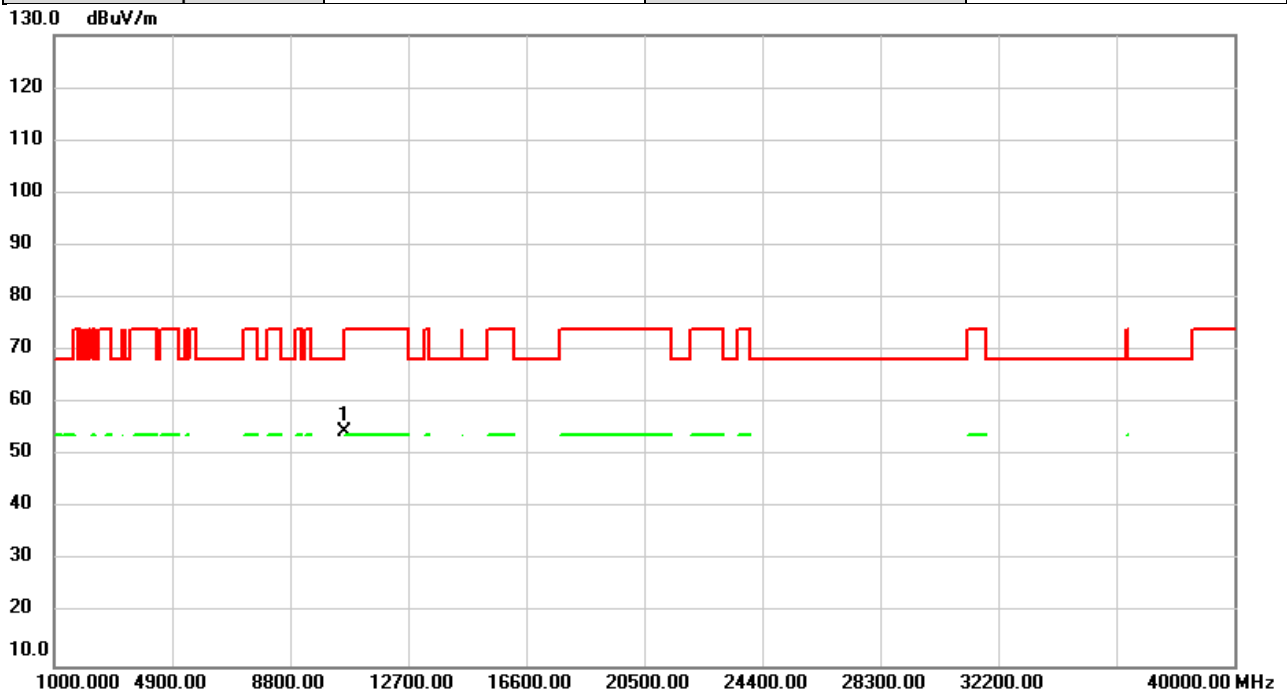


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	52.57	1.87	54.44	68.20	-13.76	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5290MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

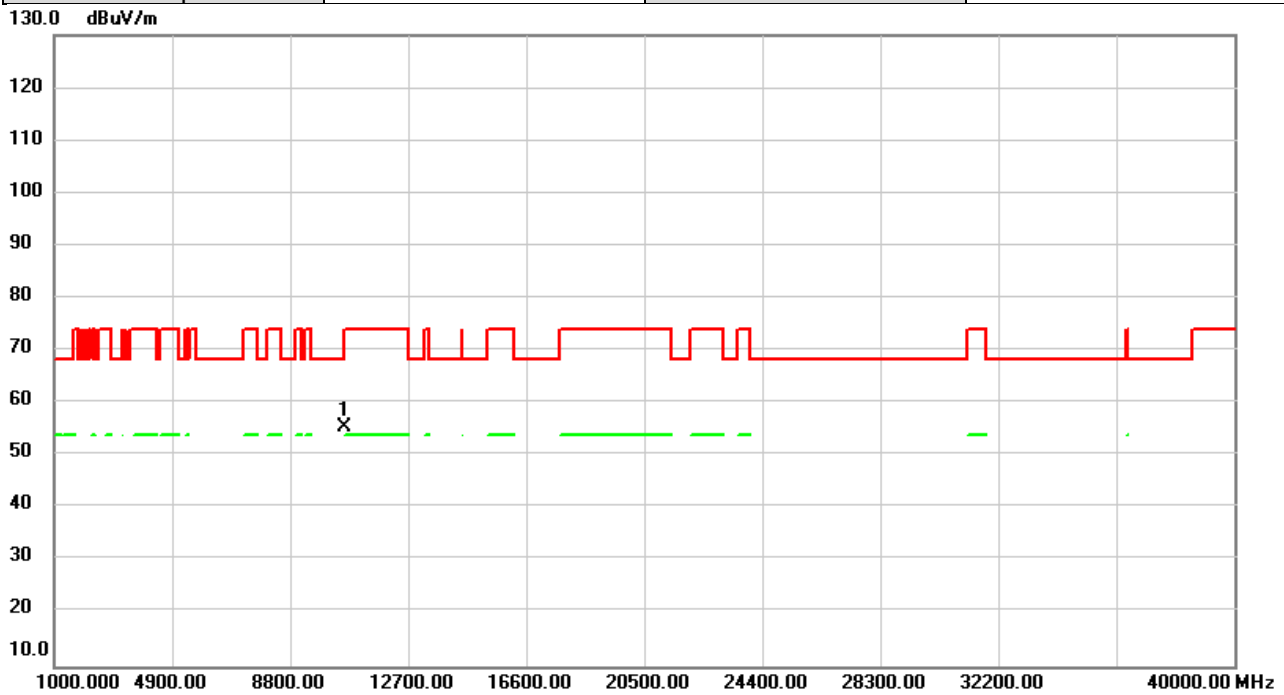


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	53.46	1.87	55.33	68.20	-12.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5530MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

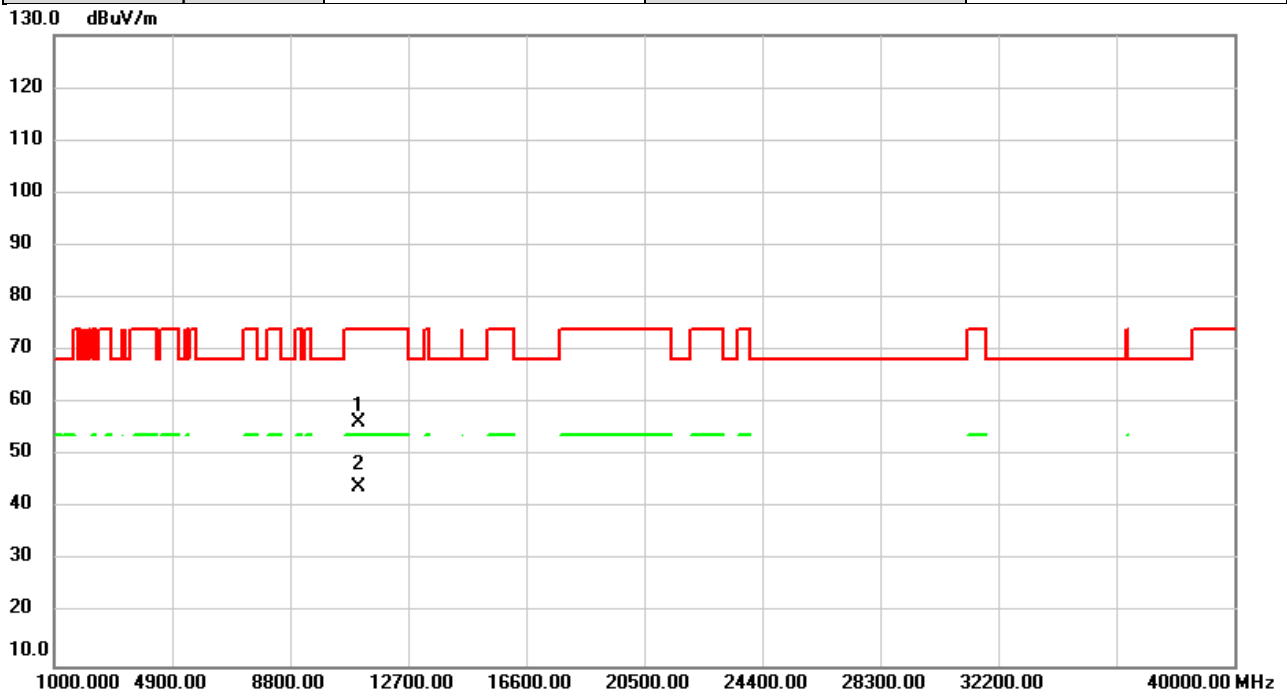


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	53.32	3.15	56.47	74.00	-17.53	peak	
2	*	11060.00	41.03	3.15	44.18	54.00	-9.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5530MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

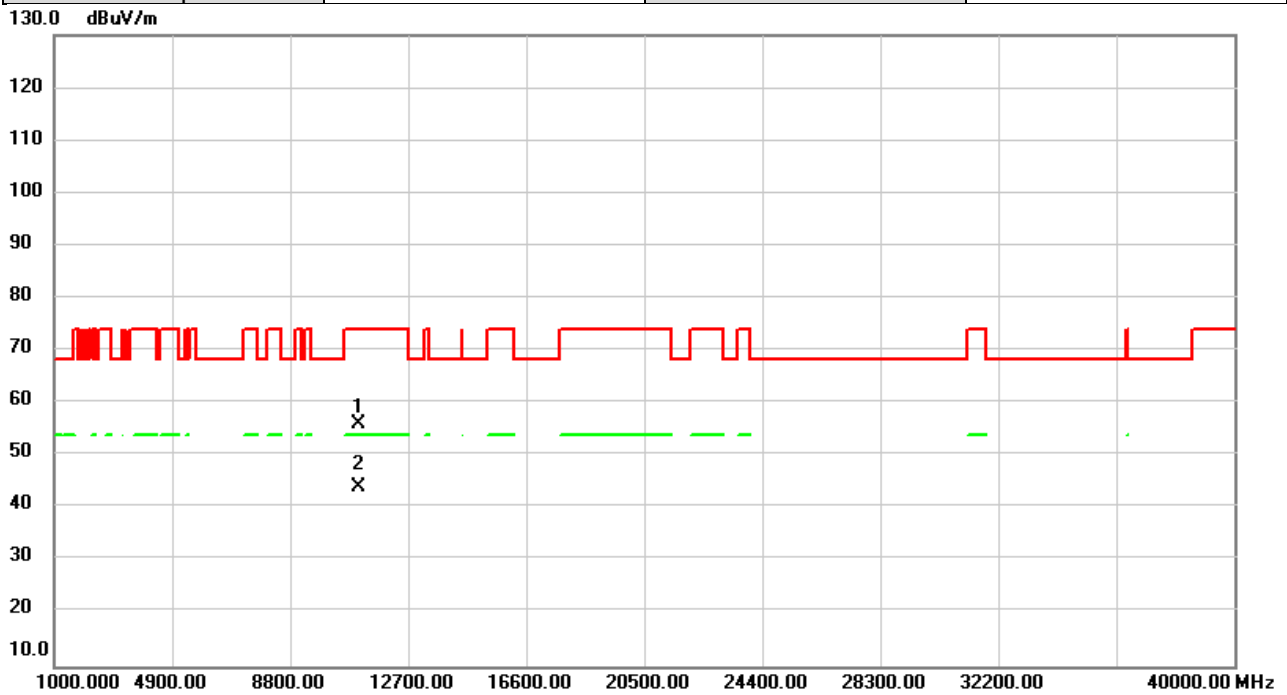


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	52.88	3.15	56.03	74.00	-17.97	peak	
2	*	11060.00	40.95	3.15	44.10	54.00	-9.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5610MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

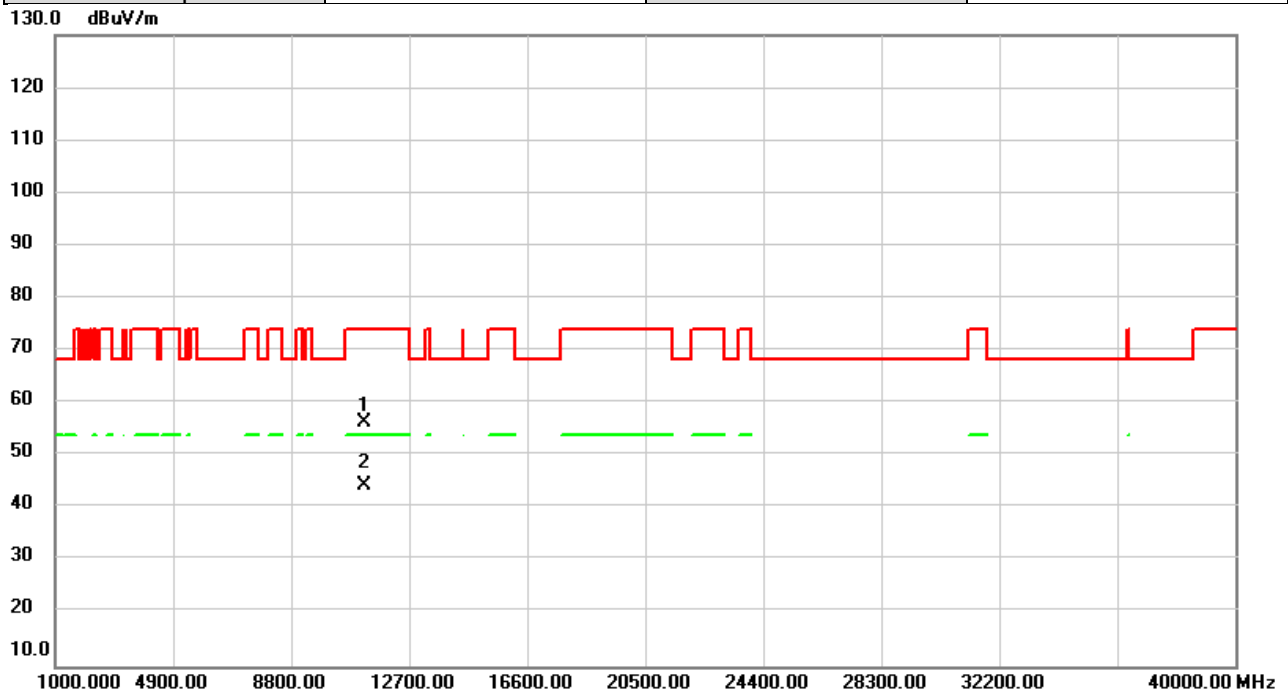


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	53.46	2.81	56.27	74.00	-17.73	peak	
2	*	11220.00	41.64	2.81	44.45	54.00	-9.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5610MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

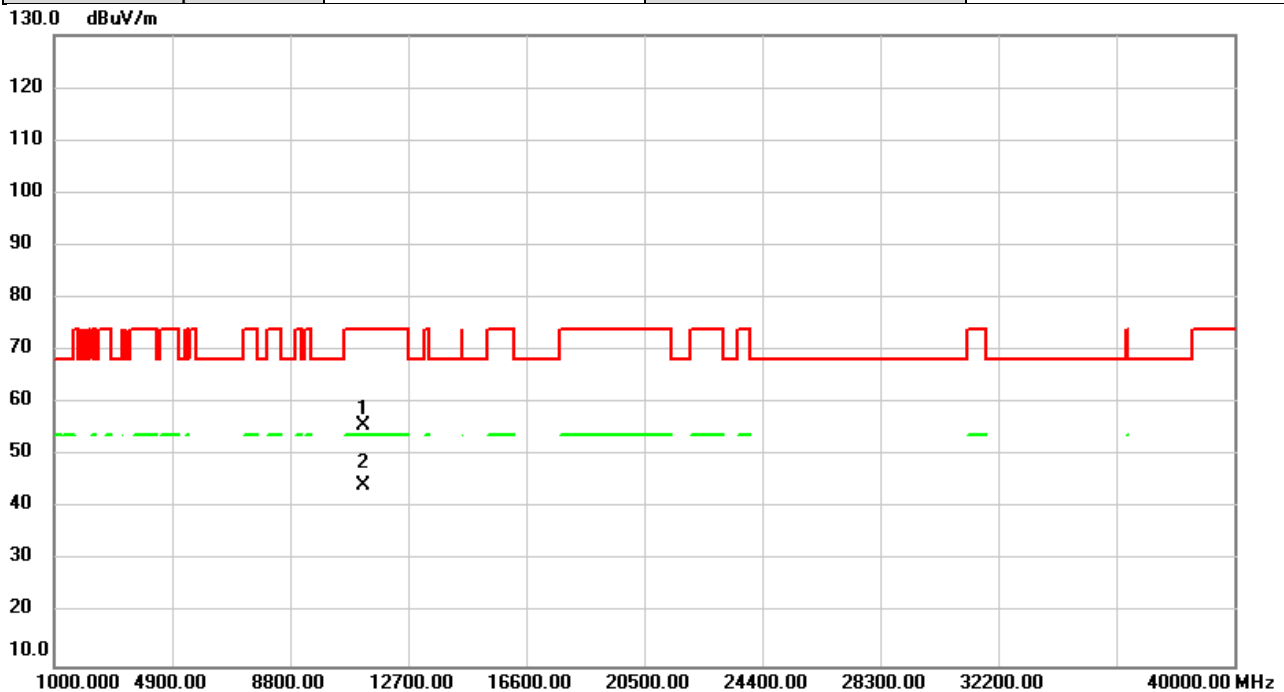


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	52.99	2.81	55.80	74.00	-18.20	peak	
2	*	11220.00	41.67	2.81	44.48	54.00	-9.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5690MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

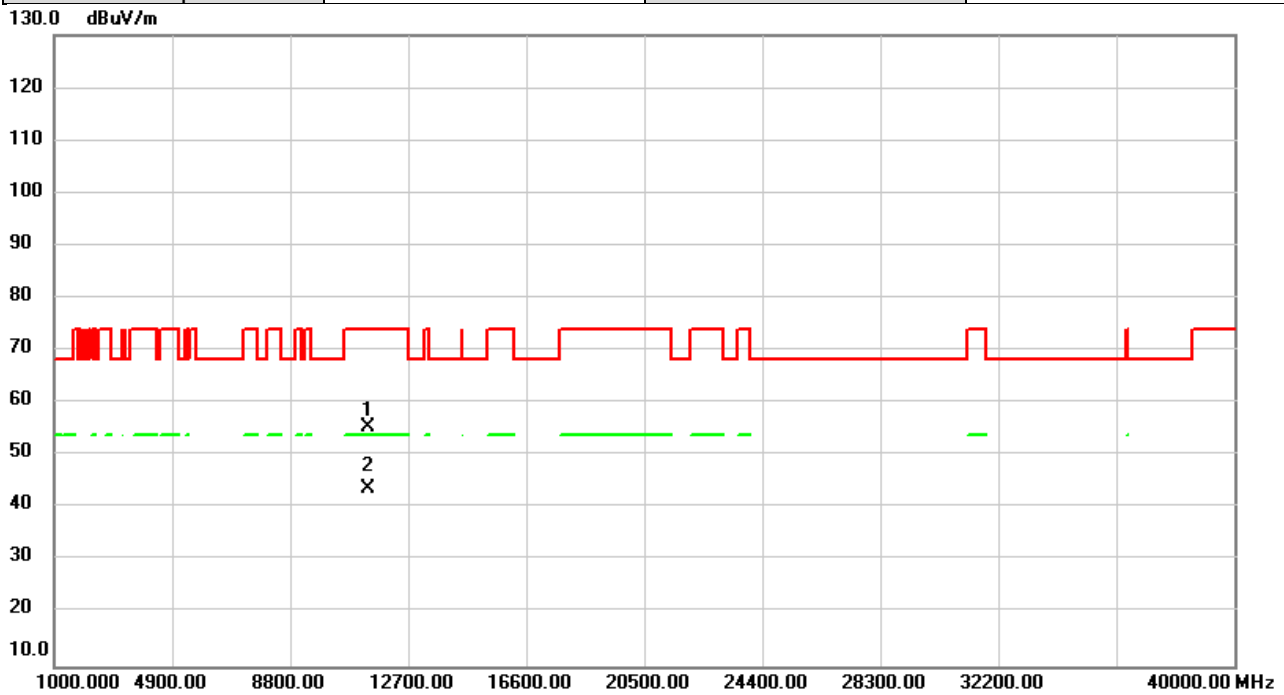


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11380.00	53.00	2.49	55.49	74.00	-18.51	peak	
2	*	11380.00	41.27	2.49	43.76	54.00	-10.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5690MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

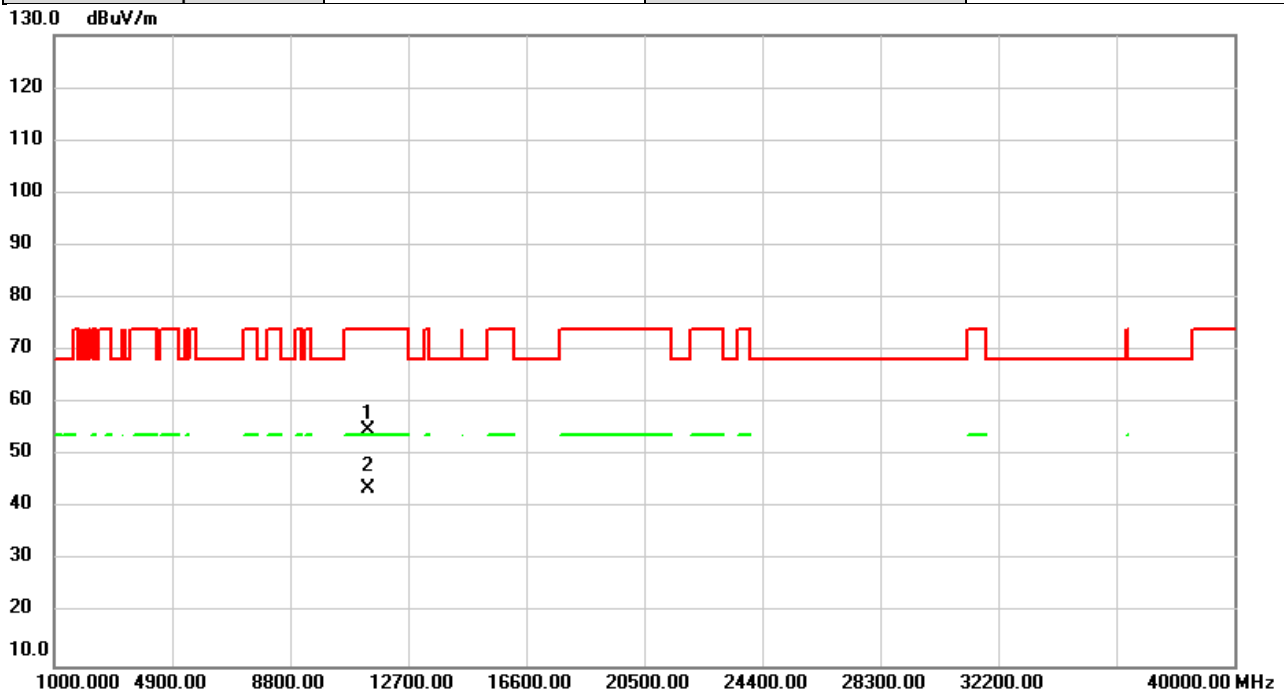


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11380.00	52.48	2.49	54.97	74.00	-19.03	peak	
2	*	11380.00	41.26	2.49	43.75	54.00	-10.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5775MHz	Polarization	Vertical
Temp	20°C	Hum.	65%

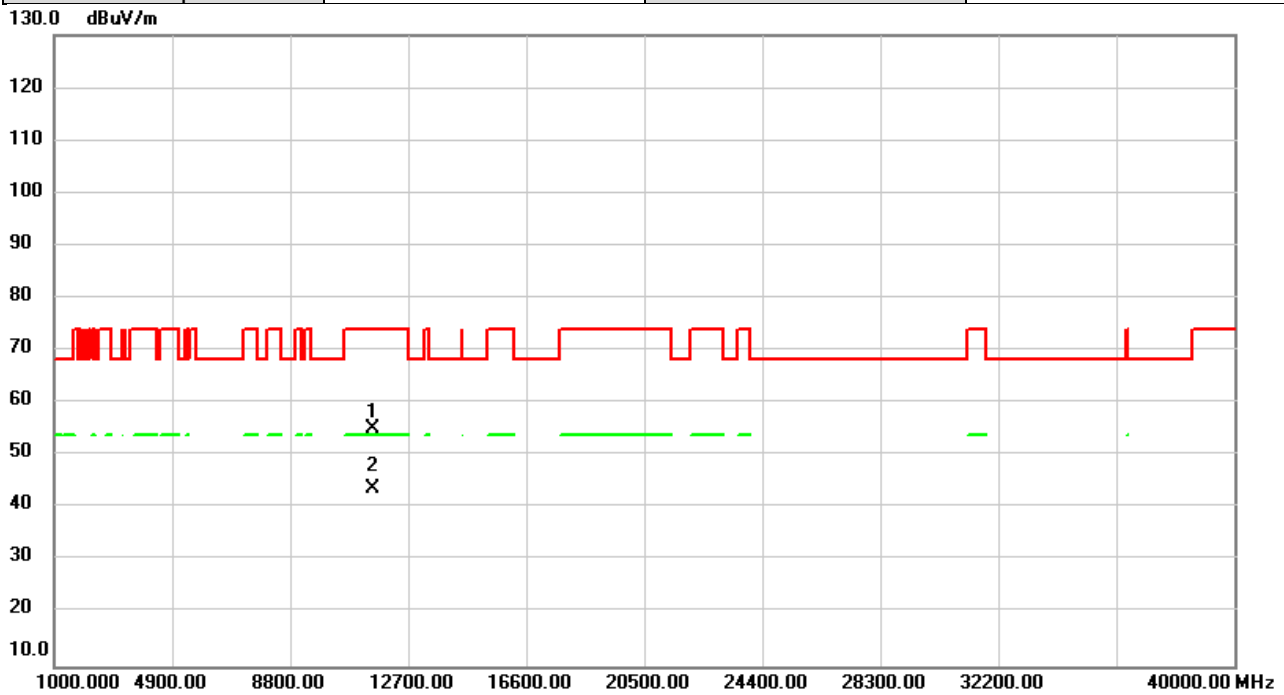


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11550.00	53.05	2.12	55.17	74.00	-18.83	peak	
2	*	11550.00	41.60	2.12	43.72	54.00	-10.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2021/12/9
Test Frequency	5775MHz	Polarization	Horizontal
Temp	20°C	Hum.	65%

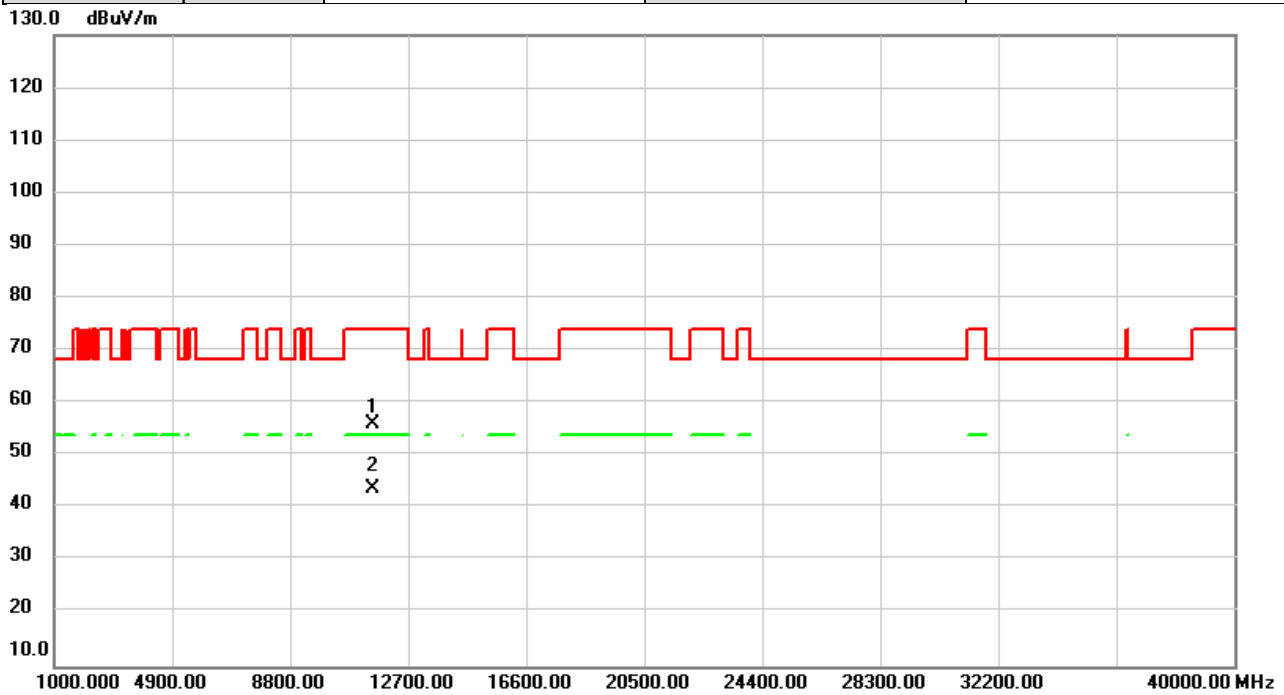

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	53.99	2.12	56.11	74.00	-17.89	peak	
2	*	11550.00	41.57	2.12	43.69	54.00	-10.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D OUTPUT POWER

For SISO:

Test Mode	IEEE 802.11a_Main	Tested Date	2021/12/3
-----------	-------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.32	0.0679	23.98	0.2500	Pass
5200	18.27	0.0671	23.98	0.2500	Pass
5240	18.32	0.0679	23.98	0.2500	Pass
5260	18.34	0.0682	23.98	0.2500	Pass
5300	18.25	0.0668	23.98	0.2500	Pass
5320	18.29	0.0675	23.98	0.2500	Pass
5500	18.33	0.0681	23.98	0.2500	Pass
5580	18.27	0.0671	23.98	0.2500	Pass
5700	16.75	0.0473	23.98	0.2500	Pass
5745	18.29	0.0675	30.00	1.0000	Pass
5785	18.30	0.0676	30.00	1.0000	Pass
5825	18.27	0.0671	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Aux	Tested Date	2021/12/3
-----------	------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.30	0.0676	23.98	0.2500	Pass
5200	18.29	0.0675	23.98	0.2500	Pass
5240	18.28	0.0673	23.98	0.2500	Pass
5260	18.27	0.0671	23.98	0.2500	Pass
5300	18.29	0.0675	23.98	0.2500	Pass
5320	18.31	0.0678	23.98	0.2500	Pass
5500	18.28	0.0673	23.98	0.2500	Pass
5580	18.21	0.0662	23.98	0.2500	Pass
5700	16.77	0.0475	23.98	0.2500	Pass
5745	18.23	0.0665	30.00	1.0000	Pass
5785	18.26	0.0670	30.00	1.0000	Pass
5825	18.33	0.0681	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Main	Tested Date	2021/12/3
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.13	0.0650	23.98	0.2500	Pass
5200	18.10	0.0646	23.98	0.2500	Pass
5240	18.08	0.0643	23.98	0.2500	Pass
5260	18.11	0.0647	23.98	0.2500	Pass
5300	18.14	0.0652	23.98	0.2500	Pass
5320	18.05	0.0638	23.98	0.2500	Pass
5500	18.05	0.0638	23.98	0.2500	Pass
5580	18.13	0.0650	23.98	0.2500	Pass
5700	16.97	0.0498	23.98	0.2500	Pass
5745	18.09	0.0644	30.00	1.0000	Pass
5785	18.06	0.0640	30.00	1.0000	Pass
5825	18.11	0.0647	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Aux	Tested Date	2021/12/3
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.06	0.0640	23.98	0.2500	Pass
5200	18.03	0.0635	23.98	0.2500	Pass
5240	18.12	0.0649	23.98	0.2500	Pass
5260	18.16	0.0655	23.98	0.2500	Pass
5300	18.06	0.0640	23.98	0.2500	Pass
5320	18.11	0.0647	23.98	0.2500	Pass
5500	18.09	0.0644	23.98	0.2500	Pass
5580	18.07	0.0641	23.98	0.2500	Pass
5700	17.56	0.0570	23.98	0.2500	Pass
5745	18.04	0.0637	30.00	1.0000	Pass
5785	18.09	0.0644	30.00	1.0000	Pass
5825	18.10	0.0646	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Main	Tested Date	2021/12/3
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.13	0.0650	23.98	0.2500	Pass
5230	18.10	0.0646	23.98	0.2500	Pass
5270	18.03	0.0635	23.98	0.2500	Pass
5310	18.05	0.0638	23.98	0.2500	Pass
5510	16.90	0.0490	23.98	0.2500	Pass
5550	18.07	0.0641	23.98	0.2500	Pass
5670	17.67	0.0585	23.98	0.2500	Pass
5755	18.09	0.0644	30.00	1.0000	Pass
5795	18.07	0.0641	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Aux	Tested Date	2021/12/3
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.03	0.0635	23.98	0.2500	Pass
5230	18.16	0.0655	23.98	0.2500	Pass
5270	18.10	0.0646	23.98	0.2500	Pass
5310	18.07	0.0641	23.98	0.2500	Pass
5510	17.45	0.0556	23.98	0.2500	Pass
5550	18.15	0.0653	23.98	0.2500	Pass
5670	17.40	0.0550	23.98	0.2500	Pass
5755	18.09	0.0644	30.00	1.0000	Pass
5795	18.10	0.0646	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.31	0.0678	23.98	0.2500	Pass
5200	18.26	0.0670	23.98	0.2500	Pass
5240	18.30	0.0676	23.98	0.2500	Pass
5260	18.36	0.0685	23.98	0.2500	Pass
5300	18.27	0.0671	23.98	0.2500	Pass
5320	18.26	0.0670	23.98	0.2500	Pass
5500	18.22	0.0664	23.98	0.2500	Pass
5580	17.20	0.0525	23.98	0.2500	Pass
5700	17.20	0.0525	23.98	0.2500	Pass
5745	18.33	0.0681	30.00	1.0000	Pass
5785	18.22	0.0664	30.00	1.0000	Pass
5825	18.31	0.0678	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.26	0.0670	23.98	0.2500	Pass
5200	18.27	0.0671	23.98	0.2500	Pass
5240	18.29	0.0675	23.98	0.2500	Pass
5260	18.30	0.0676	23.98	0.2500	Pass
5300	18.24	0.0667	23.98	0.2500	Pass
5320	18.29	0.0675	23.98	0.2500	Pass
5500	18.26	0.0670	23.98	0.2500	Pass
5580	18.30	0.0676	23.98	0.2500	Pass
5700	17.74	0.0594	23.98	0.2500	Pass
5745	18.20	0.0661	30.00	1.0000	Pass
5785	18.33	0.0681	30.00	1.0000	Pass
5825	18.31	0.0678	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.34	0.0682	23.98	0.2500	Pass
5230	18.30	0.0676	23.98	0.2500	Pass
5270	18.23	0.0665	23.98	0.2500	Pass
5310	18.23	0.0665	23.98	0.2500	Pass
5510	17.03	0.0505	23.98	0.2500	Pass
5550	18.29	0.0675	23.98	0.2500	Pass
5670	17.85	0.0610	23.98	0.2500	Pass
5755	18.31	0.0678	30.00	1.0000	Pass
5795	18.29	0.0675	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.23	0.0665	23.98	0.2500	Pass
5230	18.30	0.0676	23.98	0.2500	Pass
5270	18.29	0.0675	23.98	0.2500	Pass
5310	18.28	0.0673	23.98	0.2500	Pass
5510	17.67	0.0585	23.98	0.2500	Pass
5550	18.30	0.0676	23.98	0.2500	Pass
5670	17.60	0.0575	23.98	0.2500	Pass
5755	18.31	0.0678	30.00	1.0000	Pass
5795	18.27	0.0671	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	16.44	0.0441	23.98	0.2500	Pass
5290	14.24	0.0265	23.98	0.2500	Pass
5530	16.49	0.0446	23.98	0.2500	Pass
5610	18.34	0.0682	23.98	0.2500	Pass
5775	18.35	0.0684	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	16.14	0.0411	23.98	0.2500	Pass
5290	17.26	0.0532	23.98	0.2500	Pass
5530	16.20	0.0417	23.98	0.2500	Pass
5610	18.28	0.0673	23.98	0.2500	Pass
5775	18.29	0.0675	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	17.80	0.0603	23.98	0.2500	Pass
5200	18.28	0.0673	23.98	0.2500	Pass
5240	18.29	0.0675	23.98	0.2500	Pass
5260	18.26	0.0670	23.98	0.2500	Pass
5300	18.32	0.0679	23.98	0.2500	Pass
5320	18.26	0.0670	23.98	0.2500	Pass
5500	16.68	0.0466	23.98	0.2500	Pass
5580	18.21	0.0662	23.98	0.2500	Pass
5700	15.82	0.0382	23.98	0.2500	Pass
5745	18.26	0.0670	30.00	1.0000	Pass
5785	18.33	0.0681	30.00	1.0000	Pass
5825	18.30	0.0676	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	17.79	0.0601	23.98	0.2500	Pass
5200	18.30	0.0676	23.98	0.2500	Pass
5240	18.35	0.0684	23.98	0.2500	Pass
5260	18.24	0.0667	23.98	0.2500	Pass
5300	18.32	0.0679	23.98	0.2500	Pass
5320	18.32	0.0679	23.98	0.2500	Pass
5500	17.48	0.0560	23.98	0.2500	Pass
5580	18.31	0.0678	23.98	0.2500	Pass
5700	15.71	0.0372	23.98	0.2500	Pass
5745	18.28	0.0673	30.00	1.0000	Pass
5785	18.22	0.0664	30.00	1.0000	Pass
5825	18.32	0.0679	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	16.83	0.0482	23.98	0.2500	Pass
5230	18.33	0.0681	23.98	0.2500	Pass
5270	18.25	0.0668	23.98	0.2500	Pass
5310	18.36	0.0685	23.98	0.2500	Pass
5510	18.33	0.0681	23.98	0.2500	Pass
5550	18.24	0.0667	23.98	0.2500	Pass
5670	16.70	0.0468	23.98	0.2500	Pass
5755	18.30	0.0676	30.00	1.0000	Pass
5795	18.34	0.0682	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	16.68	0.0466	23.98	0.2500	Pass
5230	18.25	0.0668	23.98	0.2500	Pass
5270	18.29	0.0675	23.98	0.2500	Pass
5310	16.65	0.0462	23.98	0.2500	Pass
5510	18.28	0.0673	23.98	0.2500	Pass
5550	18.33	0.0681	23.98	0.2500	Pass
5670	17.00	0.0501	23.98	0.2500	Pass
5755	18.33	0.0681	30.00	1.0000	Pass
5795	18.29	0.0675	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	15.57	0.0361	23.98	0.2500	Pass
5290	16.42	0.0439	23.98	0.2500	Pass
5530	16.66	0.0463	23.98	0.2500	Pass
5610	18.27	0.0671	23.98	0.2500	Pass
5775	18.24	0.0667	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	15.90	0.0389	23.98	0.2500	Pass
5290	16.58	0.0455	23.98	0.2500	Pass
5530	16.58	0.0455	23.98	0.2500	Pass
5610	18.30	0.0676	23.98	0.2500	Pass
5775	18.33	0.0681	30.00	1.0000	Pass

For MIMO:

Test Mode	IEEE 802.11a_Main	Tested Date	2021/12/3
-----------	-------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.48	0.0705	23.98	0.2500	Pass
5200	18.43	0.0697	23.98	0.2500	Pass
5240	18.45	0.0700	23.98	0.2500	Pass
5260	18.48	0.0705	23.98	0.2500	Pass
5300	18.42	0.0695	23.98	0.2500	Pass
5320	18.48	0.0705	23.98	0.2500	Pass
5500	18.46	0.0701	23.98	0.2500	Pass
5580	18.43	0.0697	23.98	0.2500	Pass
5700	16.93	0.0493	23.98	0.2500	Pass
5745	18.45	0.0700	30.00	1.0000	Pass
5785	18.47	0.0703	30.00	1.0000	Pass
5825	18.42	0.0695	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Aux	Tested Date	2021/12/3
-----------	------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.42	0.0695	23.98	0.2500	Pass
5200	18.45	0.0700	23.98	0.2500	Pass
5240	18.45	0.0700	23.98	0.2500	Pass
5260	18.40	0.0692	23.98	0.2500	Pass
5300	18.42	0.0695	23.98	0.2500	Pass
5320	18.44	0.0698	23.98	0.2500	Pass
5500	18.46	0.0701	23.98	0.2500	Pass
5580	18.40	0.0692	23.98	0.2500	Pass
5700	16.91	0.0491	23.98	0.2500	Pass
5745	18.40	0.0692	30.00	1.0000	Pass
5785	18.43	0.0697	30.00	1.0000	Pass
5825	18.46	0.0701	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Total	Tested Date	2021/12/3
-----------	--------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	21.46	0.1400	23.98	0.2500	Pass
5200	21.45	0.1396	23.98	0.2500	Pass
5240	21.46	0.1400	23.98	0.2500	Pass
5260	21.45	0.1397	23.98	0.2500	Pass
5300	21.43	0.1390	23.98	0.2500	Pass
5320	21.47	0.1403	23.98	0.2500	Pass
5500	21.47	0.1403	23.98	0.2500	Pass
5580	21.43	0.1388	23.98	0.2500	Pass
5700	19.93	0.0984	23.98	0.2500	Pass
5745	21.44	0.1392	30.00	1.0000	Pass
5785	21.46	0.1400	30.00	1.0000	Pass
5825	21.45	0.1396	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Main	Tested Date	2021/12/3
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.27	0.0671	23.98	0.2500	Pass
5200	18.24	0.0667	23.98	0.2500	Pass
5240	18.24	0.0667	23.98	0.2500	Pass
5260	18.27	0.0671	23.98	0.2500	Pass
5300	18.26	0.0670	23.98	0.2500	Pass
5320	18.21	0.0662	23.98	0.2500	Pass
5500	18.23	0.0665	23.98	0.2500	Pass
5580	18.30	0.0676	23.98	0.2500	Pass
5700	17.14	0.0518	23.98	0.2500	Pass
5745	18.28	0.0673	30.00	1.0000	Pass
5785	18.20	0.0661	30.00	1.0000	Pass
5825	18.27	0.0671	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Aux	Tested Date	2021/12/3
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.25	0.0668	23.98	0.2500	Pass
5200	18.22	0.0664	23.98	0.2500	Pass
5240	18.28	0.0673	23.98	0.2500	Pass
5260	18.29	0.0675	23.98	0.2500	Pass
5300	18.22	0.0664	23.98	0.2500	Pass
5320	18.25	0.0668	23.98	0.2500	Pass
5500	18.22	0.0664	23.98	0.2500	Pass
5580	18.22	0.0664	23.98	0.2500	Pass
5700	17.74	0.0594	23.98	0.2500	Pass
5745	18.18	0.0658	30.00	1.0000	Pass
5785	18.26	0.0670	30.00	1.0000	Pass
5825	18.26	0.0670	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Total	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	21.27	0.1340	23.98	0.2500	Pass
5200	21.24	0.1331	23.98	0.2500	Pass
5240	21.27	0.1340	23.98	0.2500	Pass
5260	21.29	0.1346	23.98	0.2500	Pass
5300	21.25	0.1334	23.98	0.2500	Pass
5320	21.24	0.1331	23.98	0.2500	Pass
5500	21.24	0.1329	23.98	0.2500	Pass
5580	21.27	0.1340	23.98	0.2500	Pass
5700	20.46	0.1112	23.98	0.2500	Pass
5745	21.24	0.1331	30.00	1.0000	Pass
5785	21.24	0.1331	30.00	1.0000	Pass
5825	21.28	0.1341	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Main	Tested Date	2021/12/3
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.28	0.0673	23.98	0.2500	Pass
5230	18.22	0.0664	23.98	0.2500	Pass
5270	18.20	0.0661	23.98	0.2500	Pass
5310	18.23	0.0665	23.98	0.2500	Pass
5510	17.02	0.0504	23.98	0.2500	Pass
5550	18.22	0.0664	23.98	0.2500	Pass
5670	17.85	0.0610	23.98	0.2500	Pass
5755	18.23	0.0665	30.00	1.0000	Pass
5795	18.25	0.0668	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Aux	Tested Date	2021/12/3
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.22	0.0664	23.98	0.2500	Pass
5230	18.31	0.0678	23.98	0.2500	Pass
5270	18.28	0.0673	23.98	0.2500	Pass
5310	18.24	0.0667	23.98	0.2500	Pass
5510	17.62	0.0578	23.98	0.2500	Pass
5550	18.28	0.0673	23.98	0.2500	Pass
5670	17.54	0.0568	23.98	0.2500	Pass
5755	18.24	0.0667	30.00	1.0000	Pass
5795	18.23	0.0665	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Total	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	21.26	0.1337	23.98	0.2500	Pass
5230	21.28	0.1341	23.98	0.2500	Pass
5270	21.25	0.1334	23.98	0.2500	Pass
5310	21.25	0.1332	23.98	0.2500	Pass
5510	20.34	0.1082	23.98	0.2500	Pass
5550	21.26	0.1337	23.98	0.2500	Pass
5670	20.71	0.1177	23.98	0.2500	Pass
5755	21.25	0.1332	30.00	1.0000	Pass
5795	21.25	0.1334	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.48	0.0705	23.98	0.2500	Pass
5200	18.42	0.0695	23.98	0.2500	Pass
5240	18.45	0.0700	23.98	0.2500	Pass
5260	18.48	0.0705	23.98	0.2500	Pass
5300	18.45	0.0700	23.98	0.2500	Pass
5320	18.42	0.0695	23.98	0.2500	Pass
5500	18.40	0.0692	23.98	0.2500	Pass
5580	17.33	0.0541	23.98	0.2500	Pass
5700	17.33	0.0541	23.98	0.2500	Pass
5745	18.47	0.0703	30.00	1.0000	Pass
5785	18.41	0.0693	30.00	1.0000	Pass
5825	18.46	0.0701	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	18.45	0.0700	23.98	0.2500	Pass
5200	18.42	0.0695	23.98	0.2500	Pass
5240	18.48	0.0705	23.98	0.2500	Pass
5260	18.46	0.0701	23.98	0.2500	Pass
5300	18.42	0.0695	23.98	0.2500	Pass
5320	18.46	0.0701	23.98	0.2500	Pass
5500	18.40	0.0692	23.98	0.2500	Pass
5580	18.42	0.0695	23.98	0.2500	Pass
5700	17.92	0.0619	23.98	0.2500	Pass
5745	18.39	0.0690	30.00	1.0000	Pass
5785	18.46	0.0701	30.00	1.0000	Pass
5825	18.43	0.0697	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	21.48	0.1405	23.98	0.2500	Pass
5200	21.43	0.1390	23.98	0.2500	Pass
5240	21.48	0.1405	23.98	0.2500	Pass
5260	21.48	0.1406	23.98	0.2500	Pass
5300	21.45	0.1395	23.98	0.2500	Pass
5320	21.45	0.1396	23.98	0.2500	Pass
5500	21.41	0.1384	23.98	0.2500	Pass
5580	20.92	0.1236	23.98	0.2500	Pass
5700	20.65	0.1160	23.98	0.2500	Pass
5745	21.44	0.1393	30.00	1.0000	Pass
5785	21.45	0.1395	30.00	1.0000	Pass
5825	21.46	0.1398	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.48	0.0705	23.98	0.2500	Pass
5230	18.44	0.0698	23.98	0.2500	Pass
5270	18.39	0.0690	23.98	0.2500	Pass
5310	18.42	0.0695	23.98	0.2500	Pass
5510	17.21	0.0526	23.98	0.2500	Pass
5550	18.41	0.0693	23.98	0.2500	Pass
5670	18.03	0.0635	23.98	0.2500	Pass
5755	18.45	0.0700	30.00	1.0000	Pass
5795	18.43	0.0697	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	18.41	0.0693	23.98	0.2500	Pass
5230	18.48	0.0705	23.98	0.2500	Pass
5270	18.46	0.0701	23.98	0.2500	Pass
5310	18.46	0.0701	23.98	0.2500	Pass
5510	17.82	0.0605	23.98	0.2500	Pass
5550	18.46	0.0701	23.98	0.2500	Pass
5670	17.73	0.0593	23.98	0.2500	Pass
5755	18.45	0.0700	30.00	1.0000	Pass
5795	18.43	0.0697	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	21.46	0.1398	23.98	0.2500	Pass
5230	21.47	0.1403	23.98	0.2500	Pass
5270	21.44	0.1392	23.98	0.2500	Pass
5310	21.45	0.1396	23.98	0.2500	Pass
5510	20.54	0.1131	23.98	0.2500	Pass
5550	21.45	0.1395	23.98	0.2500	Pass
5670	20.89	0.1228	23.98	0.2500	Pass
5755	21.46	0.1400	30.00	1.0000	Pass
5795	21.44	0.1393	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	16.61	0.0458	23.98	0.2500	Pass
5290	14.37	0.0274	23.98	0.2500	Pass
5530	16.62	0.0459	23.98	0.2500	Pass
5610	18.48	0.0705	23.98	0.2500	Pass
5775	18.47	0.0703	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	16.32	0.0429	23.98	0.2500	Pass
5290	17.43	0.0553	23.98	0.2500	Pass
5530	16.33	0.0430	23.98	0.2500	Pass
5610	18.44	0.0698	23.98	0.2500	Pass
5775	18.45	0.0700	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	19.48	0.0887	23.98	0.2500	Pass
5290	19.17	0.0827	23.98	0.2500	Pass
5530	19.49	0.0889	23.98	0.2500	Pass
5610	21.47	0.1403	23.98	0.2500	Pass
5775	21.47	0.1403	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	17.98	0.0628	23.98	0.2500	Pass
5200	18.40	0.0692	23.98	0.2500	Pass
5240	18.46	0.0701	23.98	0.2500	Pass
5260	18.42	0.0695	23.98	0.2500	Pass
5300	18.48	0.0705	23.98	0.2500	Pass
5320	18.40	0.0692	23.98	0.2500	Pass
5500	16.82	0.0481	23.98	0.2500	Pass
5580	18.40	0.0692	23.98	0.2500	Pass
5700	15.97	0.0395	23.98	0.2500	Pass
5745	18.42	0.0695	30.00	1.0000	Pass
5785	18.45	0.0700	30.00	1.0000	Pass
5825	18.48	0.0705	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	17.92	0.0619	23.98	0.2500	Pass
5200	18.43	0.0697	23.98	0.2500	Pass
5240	18.48	0.0705	23.98	0.2500	Pass
5260	18.41	0.0693	23.98	0.2500	Pass
5300	18.45	0.0700	23.98	0.2500	Pass
5320	18.47	0.0703	23.98	0.2500	Pass
5500	17.63	0.0579	23.98	0.2500	Pass
5580	18.43	0.0697	23.98	0.2500	Pass
5700	15.88	0.0387	23.98	0.2500	Pass
5745	18.45	0.0700	30.00	1.0000	Pass
5785	18.40	0.0692	30.00	1.0000	Pass
5825	18.47	0.0703	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	20.96	0.1247	23.98	0.2500	Pass
5200	21.43	0.1388	23.98	0.2500	Pass
5240	21.48	0.1406	23.98	0.2500	Pass
5260	21.43	0.1388	23.98	0.2500	Pass
5300	21.48	0.1405	23.98	0.2500	Pass
5320	21.45	0.1395	23.98	0.2500	Pass
5500	20.25	0.1060	23.98	0.2500	Pass
5580	21.43	0.1388	23.98	0.2500	Pass
5700	18.94	0.0783	23.98	0.2500	Pass
5745	21.45	0.1395	30.00	1.0000	Pass
5785	21.44	0.1392	30.00	1.0000	Pass
5825	21.49	0.1408	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	16.98	0.0499	23.98	0.2500	Pass
5230	18.47	0.0703	23.98	0.2500	Pass
5270	18.42	0.0695	23.98	0.2500	Pass
5310	18.38	0.0689	23.98	0.2500	Pass
5510	18.46	0.0701	23.98	0.2500	Pass
5550	18.41	0.0693	23.98	0.2500	Pass
5670	16.82	0.0481	23.98	0.2500	Pass
5755	18.43	0.0697	30.00	1.0000	Pass
5795	18.48	0.0705	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	16.82	0.0481	23.98	0.2500	Pass
5230	18.39	0.0690	23.98	0.2500	Pass
5270	18.42	0.0695	23.98	0.2500	Pass
5310	18.44	0.0698	23.98	0.2500	Pass
5510	18.46	0.0701	23.98	0.2500	Pass
5550	18.48	0.0705	23.98	0.2500	Pass
5670	17.18	0.0522	23.98	0.2500	Pass
5755	18.47	0.0703	30.00	1.0000	Pass
5795	18.44	0.0698	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	19.91	0.0980	23.98	0.2500	Pass
5230	21.44	0.1393	23.98	0.2500	Pass
5270	21.43	0.1390	23.98	0.2500	Pass
5310	21.42	0.1387	23.98	0.2500	Pass
5510	21.47	0.1403	23.98	0.2500	Pass
5550	21.46	0.1398	23.98	0.2500	Pass
5670	20.01	0.1003	23.98	0.2500	Pass
5755	21.46	0.1400	30.00	1.0000	Pass
5795	21.47	0.1403	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	15.70	0.0372	23.98	0.2500	Pass
5290	16.55	0.0452	23.98	0.2500	Pass
5530	16.79	0.0478	23.98	0.2500	Pass
5610	18.40	0.0692	23.98	0.2500	Pass
5775	18.38	0.0689	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	16.07	0.0405	23.98	0.2500	Pass
5290	16.74	0.0472	23.98	0.2500	Pass
5530	16.71	0.0469	23.98	0.2500	Pass
5610	18.43	0.0697	23.98	0.2500	Pass
5775	18.47	0.0703	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	18.90	0.0776	23.98	0.2500	Pass
5290	19.66	0.0924	23.98	0.2500	Pass
5530	19.76	0.0946	23.98	0.2500	Pass
5610	21.43	0.1388	23.98	0.2500	Pass
5775	21.44	0.1392	30.00	1.0000	Pass

For Straddle Channel:

Test Mode	IEEE 802.11a_Main	Tested Date	2021/12/3
-----------	-------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.12	0.0163	23.98	0.2500	Pass
5720	6.18	0.0041	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Aux	Tested Date	2021/12/3
-----------	------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.62	0.0183	23.98	0.2500	Pass
5720	6.35	0.0043	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Main	Tested Date	2021/12/3
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.10	0.0162	23.98	0.2500	Pass
5720	6.08	0.0041	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Aux	Tested Date	2021/12/3
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.21	0.0166	23.98	0.2500	Pass
5720	6.23	0.0042	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Main	Tested Date	2021/12/3
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.08	0.0203	23.98	0.2500	Pass
5710	4.56	0.0029	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Aux	Tested Date	2021/12/3
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.08	0.0203	23.98	0.2500	Pass
5710	5.13	0.0033	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.65	0.0184	23.98	0.2500	Pass
5720	6.28	0.0042	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.58	0.0181	23.98	0.2500	Pass
5720	6.22	0.0042	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	12.95	0.0197	23.98	0.2500	Pass
5710	5.38	0.0035	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.06	0.0202	23.98	0.2500	Pass
5710	5.51	0.0036	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	15.11	0.0324	23.98	0.2500	Pass
5690	3.21	0.0021	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	15.08	0.0322	23.98	0.2500	Pass
5690	3.45	0.0022	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.09	0.0162	23.98	0.2500	Pass
5720	5.98	0.0040	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.21	0.0166	23.98	0.2500	Pass
5720	6.02	0.0040	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	12.59	0.0182	23.98	0.2500	Pass
5710	5.21	0.0033	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	12.95	0.0197	23.98	0.2500	Pass
5710	5.58	0.0036	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	15.89	0.0388	23.98	0.2500	Pass
5690	2.42	0.0017	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	16.08	0.0406	23.98	0.2500	Pass
5690	2.54	0.0018	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Main	Tested Date	2021/12/3
-----------	-------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.02	0.0159	23.98	0.2500	Pass
5720	6.21	0.0042	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Aux	Tested Date	2021/12/3
-----------	------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.51	0.0178	23.98	0.2500	Pass
5720	6.22	0.0042	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_Total	Tested Date	2021/12/3
-----------	--------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	15.28	0.0337	23.98	0.2500	Pass
5720	9.23	0.0084	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Main	Tested Date	2021/12/3
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.12	0.0163	23.98	0.2500	Pass
5720	6.06	0.0040	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Aux	Tested Date	2021/12/3
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.11	0.0163	23.98	0.2500	Pass
5720	6.12	0.0041	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Total	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	15.13	0.0325	23.98	0.2500	Pass
5720	9.10	0.0081	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Main	Tested Date	2021/12/3
-----------	--------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.21	0.0209	23.98	0.2500	Pass
5710	4.95	0.0031	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Aux	Tested Date	2021/12/3
-----------	-------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.11	0.0205	23.98	0.2500	Pass
5710	5.12	0.0033	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Total	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	16.17	0.0414	23.98	0.2500	Pass
5710	8.05	0.0064	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.54	0.0179	23.98	0.2500	Pass
5720	6.31	0.0043	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.61	0.0182	23.98	0.2500	Pass
5720	6.35	0.0043	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT20)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	15.59	0.0362	23.98	0.2500	Pass
5720	9.34	0.0086	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.19	0.0208	23.98	0.2500	Pass
5710	5.41	0.0035	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.21	0.0209	23.98	0.2500	Pass
5710	5.61	0.0036	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT40)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	16.21	0.0418	23.98	0.2500	Pass
5710	8.52	0.0071	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	15.12	0.0325	23.98	0.2500	Pass
5690	3.31	0.0021	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	15.21	0.0332	23.98	0.2500	Pass
5690	3.56	0.0023	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	18.18	0.0657	23.98	0.2500	Pass
5690	6.45	0.0044	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.18	0.0165	23.98	0.2500	Pass
5720	6.06	0.0040	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	12.26	0.0168	23.98	0.2500	Pass
5720	6.18	0.0041	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW20)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	15.23	0.0333	23.98	0.2500	Pass
5720	9.13	0.0082	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.08	0.0203	23.98	0.2500	Pass
5710	5.48	0.0035	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.11	0.0205	23.98	0.2500	Pass
5710	5.61	0.0036	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW40)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	16.11	0.0408	23.98	0.2500	Pass
5710	8.56	0.0072	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_Main	Tested Date	2021/12/3
-----------	----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	16.03	0.0401	23.98	0.2500	Pass
5690	2.48	0.0018	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_Aux	Tested Date	2021/12/3
-----------	---------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	16.11	0.0408	23.98	0.2500	Pass
5690	2.56	0.0018	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HEW80)_Total	Tested Date	2021/12/3
-----------	-----------------------------	-------------	-----------

Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	19.08	0.0809	23.98	0.2500	Pass
5690	5.53	0.0036	30.00	1.0000	Pass

End of Test Report