

#01_WLAN2.4GHz_802.11b 1Mbps_Edge 1_0mm_Ch6;Ant 1


Communication System: 802.11b; Frequency: 2437.0 MHz; Duty Cycle: 1:1.002
Medium: HSL_2450_221121 Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.8$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.58, 7.58, 7.58); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn528; Calibrated: 2022-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10012-CAB

Area Scan (80.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.578 W/kg; SAR (10g) = 0.270 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.618 W/kg; SAR (8g) = 0.312 W/kg; SAR (10g) = 0.282 W/kg
psAPD (1.0cm², sq) = n/a [W/m²]; psAPD (4.0cm², sq) = n/a [W/m²]

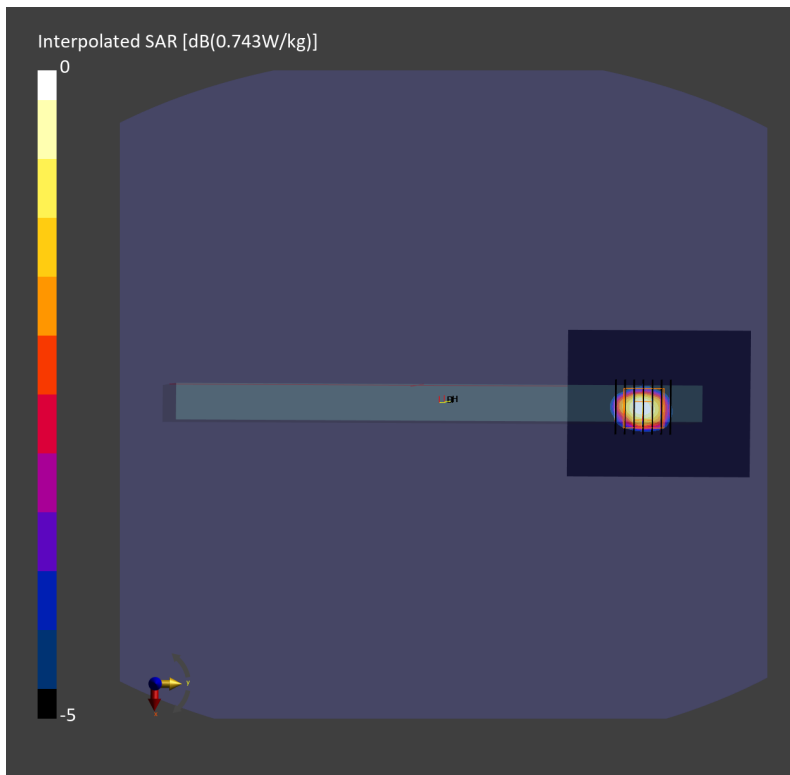

#02_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch58;Ant 1


Communication System: 802.11ac; Frequency: 5290.0 MHz; Duty Cycle: 1:1.047
Medium: HSL_5G_221120 Medium parameters used: $f=5290.0$ MHz; $\sigma=4.66$ S/m; $\epsilon_r=35.5$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.13, 5.13, 5.13); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn528; Calibrated: 2022-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10402-AAE

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.664 W/kg; SAR (10g) = 0.209 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.15 dB
SAR (1g) = 0.911 W/kg; SAR (8g) = 0.271 W/kg; SAR (10g) = 0.232 W/kg
psAPD (1.0cm², sq) = n/a [W/m²]; psAPD (4.0cm², sq) = n/a [W/m²]

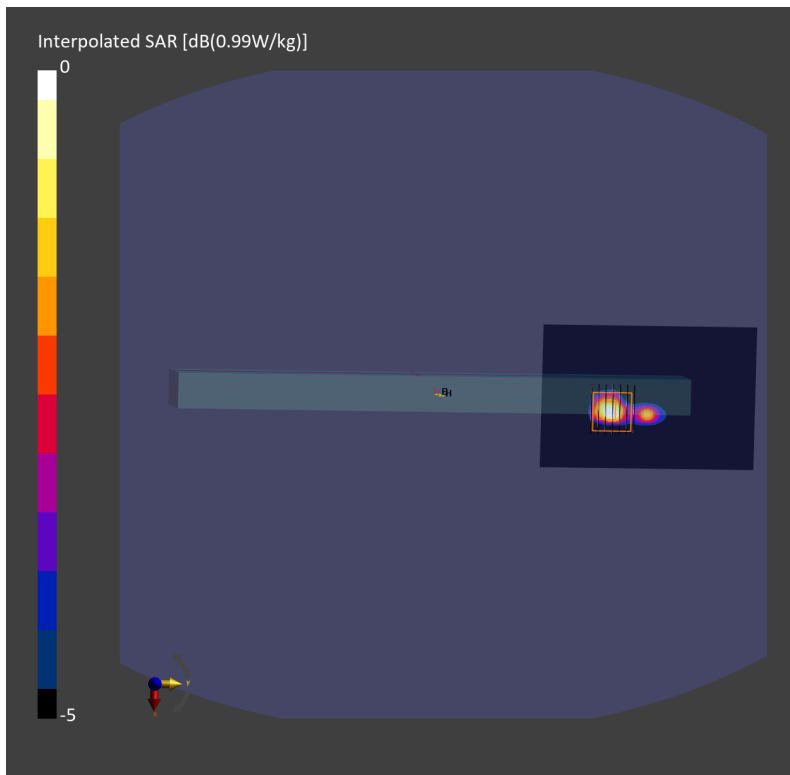

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch138;Ant 1


Communication System: 802.11ac; Frequency: 5690.0 MHz; Duty Cycle: 1:1.047
Medium: HSL_5G_221120 Medium parameters used: $f=5690.0$ MHz; $\sigma=5.13$ S/m; $\epsilon_r=34.8$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.81, 4.81, 4.81); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn528; Calibrated: 2022-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10402-AAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.602 W/kg; SAR (10g) = 0.176 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.03 dB
SAR (1g) = 0.616 W/kg; SAR (8g) = 0.209 W/kg; SAR (10g) = 0.182 W/kg
psAPD (1.0cm², sq) = n/a [W/m²]; psAPD (4.0cm², sq) = n/a [W/m²]

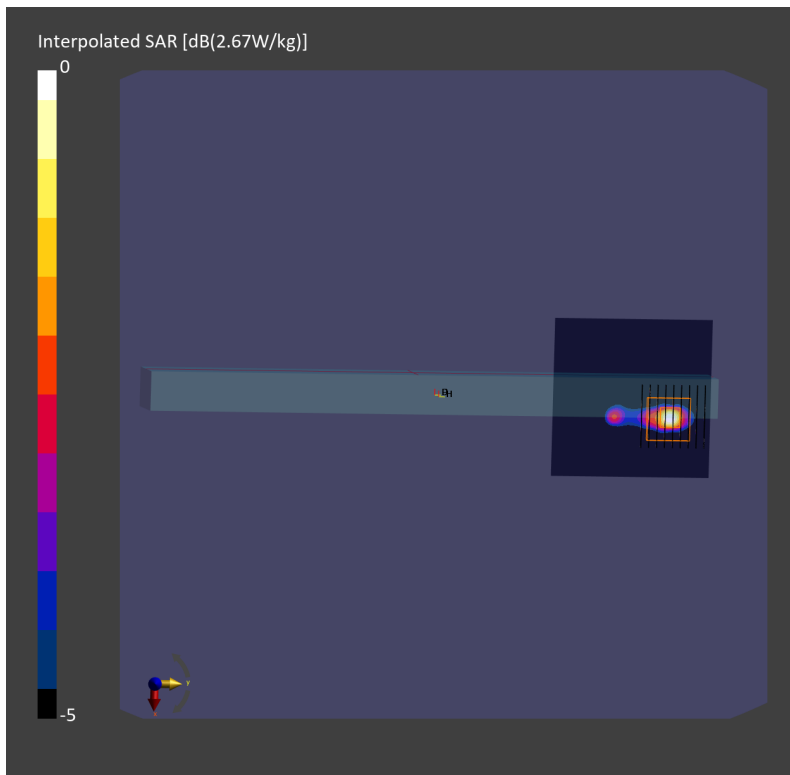

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch155;Ant 1

Communication System: 802.11ac; Frequency: 5775.0 MHz; Duty Cycle: 1:1.047

Medium: HSL_5G_221120 Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 34.62$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.81, 4.81, 4.81); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn528; Calibrated: 2022-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10402-AAE

Area Scan (60.0 mm x 60.0 mm): Measurement Grid: 10.0 mm x 10.0 mm


SAR (1g) = 0.662 W/kg; SAR (10g) = 0.197 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.684 W/kg; SAR (8g) = 0.239 W/kg; SAR (10g) = 0.209 W/kg

psAPD (1.0cm², sq) = n/a [W/m²]; psAPD (4.0cm², sq) = n/a [W/m²]

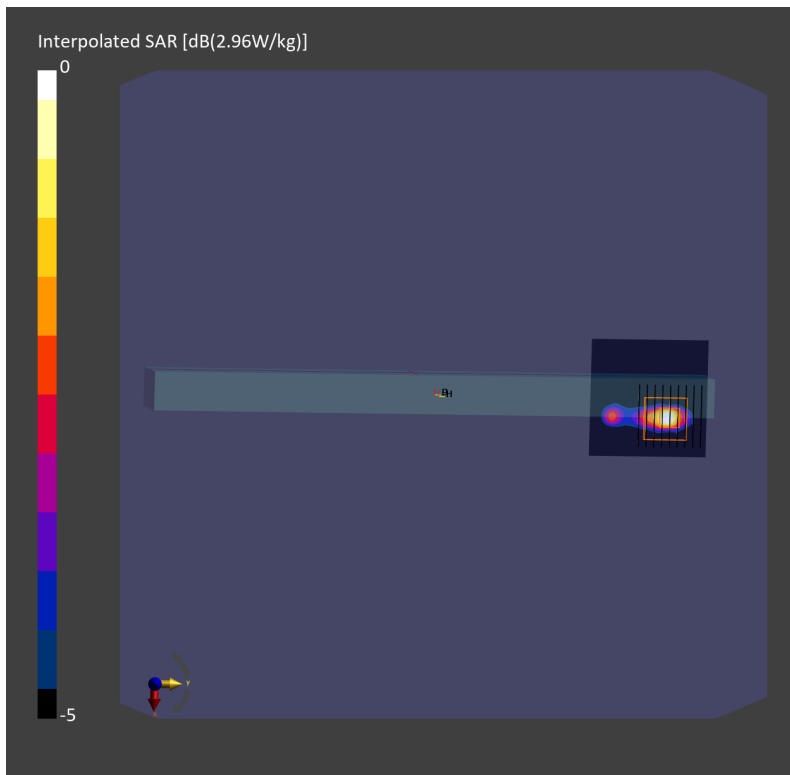

#05_Bluetooth_1Mbps_Edge 1_0mm_Ch0;Ant 2

Communication System: Bluetooth; Frequency: 2402.0 MHz; Duty Cycle: 1:1
Medium: HSL_2450_221121 Medium parameters used: $f = 2402.0$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.58, 7.58, 7.58); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn528; Calibrated: 2022-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: Bluetooth, 10030-CAA

Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.268 W/kg; SAR (10g) = 0.126 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.284 W/kg; SAR (8g) = 0.143 W/kg; SAR (10g) = 0.129 W/kg
psAPD (1.0cm², sq) = n/a [W/m²]; psAPD (4.0cm², sq) = n/a [W/m²]

