


TEST REPORT

Applicant: Realtek Semiconductor Corp.
Address: No. 2, Innovation Road II, Hsinchu Science Park,
Hsinchu 300, Taiwan
Equipment Type: 11ax RTL8852BE Combo module
Model Name: RTL8852BE
Brand Name: N/A
FCC ID: TX2-RTL8852BE
Test Standard: FCC 47 CFR Part 2.1093
(refer to section 3.1)
Maximum SAR: Body 2.4GHz(1 g): 0.60 W/kg
Body 5GHz(1 g): 1.09 W/kg
Limbs 2.4GHz(10 g): 0.70 W/kg
Limbs 5GHz(10 g): 0.54 W/kg
Sample Arrival Date: Mar. 06, 2025
Test Date: Mar. 18, 2025 - Mar. 25, 2025
Date of Issue: Apr. 21, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Xiong Lining**Checked by:** Xu Rui**Approved by:** Tolan Tu
(Testing Director)

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Apr. 21, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location.....	4
1.3	Test Environment Condition.....	4
2	PRODUCT INFORMATION.....	5
2.1	Applicant Information.....	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Ancillary Equipment.....	6
2.5	Technical Information	6
3	SUMMARY OF TEST RESULT	7
3.1	Test Standards	7
3.2	Device Category and SAR Limit.....	8
3.3	Test Result Summary.....	9
3.4	Test Uncertainty	11
4	MEASUREMENT SYSTEM	12
4.1	Specific Absorption Rate (SAR) Definition	12
4.2	DASY SAR System	13
5	SYSTEM VERIFICATION.....	20
5.1	Purpose of System Check.....	20
5.2	System Check Setup.....	20
6	TEST POSITION CONFIGURATIONS.....	21
6.1	Laptop Exposure Condition	21
6.2	Product Specific 10g Exposure Consideration	22

7	MEASUREMENT PROCEDURE.....	23
7.1	Measurement Process Diagram.....	23
7.2	SAR Scan General Requirement	24
7.3	Measurement Procedure.....	25
7.4	Area & Zoom Scan Procedure	25
8	CONDUCTED RF OUPUT POWER.....	26
8.1	WIFI.....	26
8.2	Bluetooth	42
9	TEST EXCLUSION CONSIDERATION.....	43
9.1	Antenna Location Sketch	43
9.2	SAR Test Consideration Table.....	46
10	TEST RESULT	50
10.1	Bluetooth	51
10.1	WIFI 2.4GHz.....	52
10.2	WIFI 5GHz.....	53
11	SAR Measurement Variability.....	56
12	SIMULTANEOUS TRANSMISSION	57
12.1	Simultaneous Transmission Mode Considerations	57
12.2	Body Simultaneous Transmission SAR Evaluation.....	58
12.3	Limbs Simultaneous Transmission SAR Evaluation	58
13	TEST EQUIPMENTS LIST	60
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	61
ANNEX B	SYSTEM CHECK RESULT.....	62
ANNEX C	TEST DATA.....	71
ANNEX D	EUT EXTERNAL PHOTOS	115
ANNEX E	SAR TEST SETUP PHOTOS.....	115
ANNEX F	CALIBRATION REPORT	115
ANNEX G	TUNE-UP PROCEDURE	115

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☒ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

1.3 Test Environment Condition

Ambient Temperature	18°C to 25°C
Ambient Relative Humidity	30% to 70%

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

2.2 Manufacturer Information

Manufacturer	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

2.3 General Description for Equipment under Test (EUT)

EUT Name	11ax RTL8852BE Combo module
Model Name Under Test	RTL8852BE
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.3.1 Host Information:

Product Name	Notebook Computer
Model Name	Legion 5 15IRX10, Legion 5 15IAX10, Legion 5 15AHP10, Legion 5 15AKP10
Brand Name	Lenovo

2.3.2 Antenna Information:

Antenna Port	Model Name	Antenna Manufacturer	Antenna Type	Antenna Gain (dBi)				
				2.4 GHz	5.15-5.25 GHz	5.25-5.35 GHz	5.47-5.725 GHz	5.725-5.895 GHz
Main Antenna	DC330027K00	Amphenol	PIFA	2.90	3.50	3.70	3.70	4.30
Auxiliary Antenna	DC330027K00		PIFA	2.60	3.20	3.10	3.20	4.10
Main Antenna	DC330027H00	Inpaq	PIFA	2.54	1.91	1.68	2.73	2.71
Auxiliary Antenna	DC330027H00		PIFA	1.42	1.34	1.34	1.67	1.13
Main Antenna	DC330027G00	Speed	PIFA	1.68	2.06	2.06	2.74	2.10
Auxiliary Antenna	DC330027G00		PIFA	0.58	1.22	1.49	1.95	1.34

2.4 Ancillary Equipment

Note: Not applicable.

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, VHT, 802.11ac and 802.11ax
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN; 5G WLAN; Bluetooth	
Frequency Range	802.11b/g	2412 ~ 2472 MHz
	VHT20/VHT40	2412 ~ 2472 MHz
	802.11ax(HE20/HE40)	2412 ~ 2472 MHz
	802.11a	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
		5815 ~ 5885 MHz
	802.11n(HT20/HT40)	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
		5815 ~ 5885 MHz
	802.11ac(VHT20/VHT40/VHT80)	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
		5815 ~ 5885 MHz
	802.11ax(HE20/HE40/HE80)	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
		5815 ~ 5885 MHz
	Bluetooth	2402 ~ 2480 MHz
Antenna Type	WLAN	PIFA
	Bluetooth	PIFA
Hotspot Function	N/A	
Exposure Category	General Population/Uncontrolled exposure	
Product Type	Portable Device	
EUT Type	☒ Production unit	☐ Identical prototype

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	ANSI C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	KDB 447498 D04 v01	447498 D04 Interim General RF Exposure Guidance v01
4	KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
5	KDB 865664 D02 v01r02	RF Exposure Reporting
6	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
7	KDB 616217 D04 v01r02	SAR for laptop and tablets

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR (1 g Value)

Equipment Class	Band	Antenna	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)
			Body (0mm)	Body (0mm)
DTS	2.4G WIFI	Aux.	0.60	1.09
	2.4G WIFI	Main	0.57	
U-NII-2A	5.3G WIFI	Aux.	0.68	
	5.3G WIFI	Main	0.89	
U-NII-2C	5.6G WIFI	Aux.	0.80	
	5.6G WIFI	Main	0.76	
U-NII-3	5.8G WIFI	Aux.	1.09	
	5.8G WIFI	Main	1.04	
U-NII-4	5.9G WIFI	Aux.	0.45	
	5.9G WIFI	Main	0.34	
DSS	Bluetooth	Aux.	0.05	
Limit (W/kg)			1.60	
Verdict			Pass	

3.3.2 Highest Simultaneous Transmission SAR Values (1 g Value)

Equipment Class	Maximum Report SAR (W/kg)	SPLSR
	Body (0mm)	
DTS	1.17	/
NII	2.17	0.01
DSS	2.17	0.01
Limit (W/kg)	1.60	0.04
Verdict	Pass	

Note: The simultaneous transmission SAR detail please refer to section 12.

3.3.3 Highest SAR (10 g Value)

Equipment Class	Band	Antenna	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)
			Limbs (0mm)	Limbs (0mm)
DTS	2.4G WIFI	Aux.	0.70	0.70
	2.4G WIFI	Main	0.63	
U-NII-2A	5.3G WIFI	Aux.	0.30	
	5.3G WIFI	Main	0.54	
U-NII-2C	5.6G WIFI	Aux.	0.48	
	5.6G WIFI	Main	0.40	
U-NII-3	5.8G WIFI	Aux.	0.51	
	5.8G WIFI	Main	0.32	
U-NII-4	5.9G WIFI	Aux.	0.32	
	5.9G WIFI	Main	0.22	
DSS	Bluetooth	Aux.	0.34	
Limit (W/kg)			4.00	
Verdict			Pass	

3.3.4 Highest Simultaneous Transmission SAR Values (10 g Value)

Equipment Class	Maximum Report SAR (W/kg)	SPLSR
	Limbs (0mm)	
DTS	1.33	/
NII	1.39	/
DSS	1.39	/
Limit (W/kg)	4.00	0.04
Verdict	Pass	Pass

Note: The simultaneous transmission SAR detail please refer to section 12.

3.4 Test Uncertainty

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 1.09 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

The maximum 10 g SAR for the EUT in this report is 0.70 W/kg, which is lower than 3.75 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

4 MEASUREMENT SYSTEM

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 DASY SAR System

4.2.1 DASY SAR System Diagram

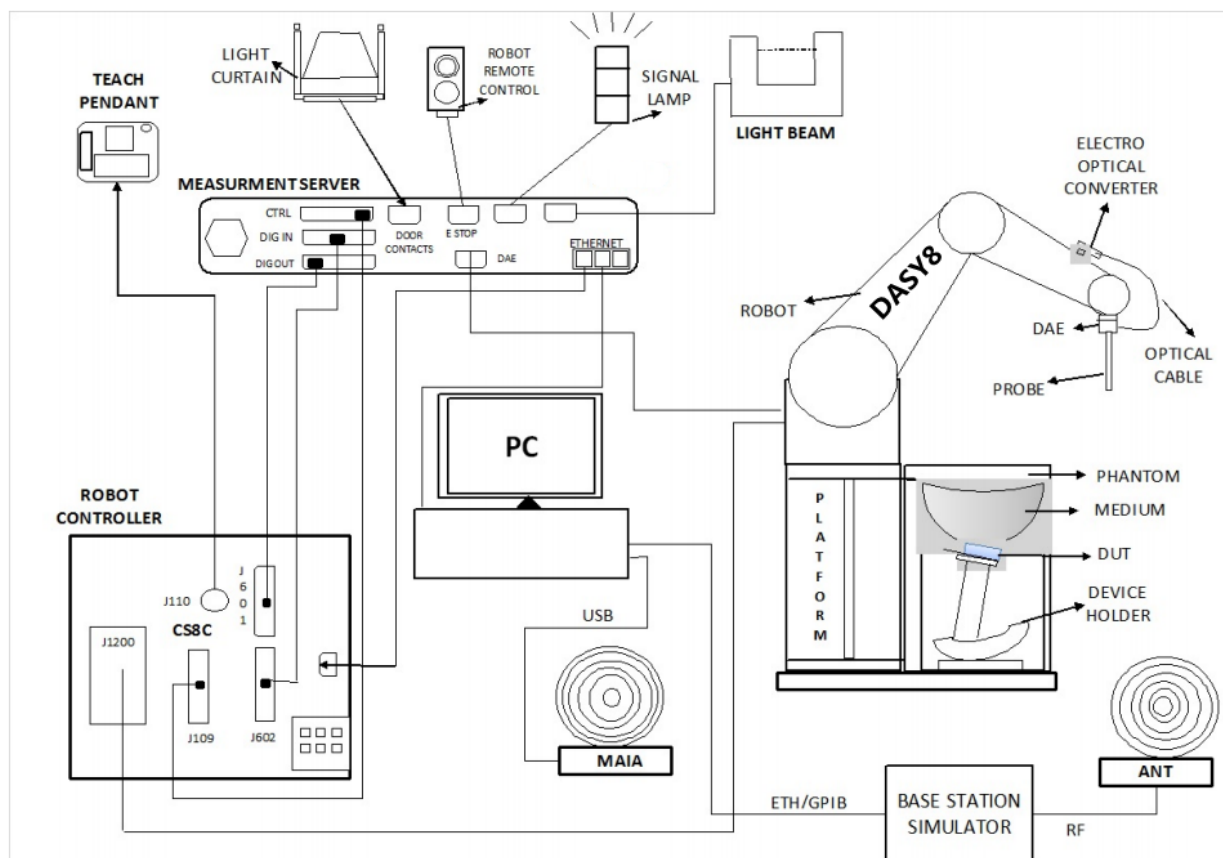

The DASY system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
6. The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision
(repeatability ± 0.02 mm)
- High reliability
(industrial design)
- Low maintenance costs
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
(brush less synchron motors; no stepper motors)
- Low ELF interference
(motor control _elds shielded via the closed metallic construction shields)

4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4 SN: 7893 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	4 MHz to 10 GHz; Linearity: ± 0.2 dB
Directivity	± 0.2 dB in HSL (rotation around probe axis); ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)



E-Field Probe Calibration Process

Probe calibration is realized, in compliance with IEC/IEEE 62209-1528 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the IEC/IEEE 62209-1528 annexe technique using reference guide at the five frequencies.

4.2.4 Data Acquisition Electronics


The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200MΩ
- The Inputs: Symmetrical and Floating
- Common Mode Rejection: Above 80dB

4.2.5 Phantoms

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of below 10 GHz. ELI V8.0 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI V8.0 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

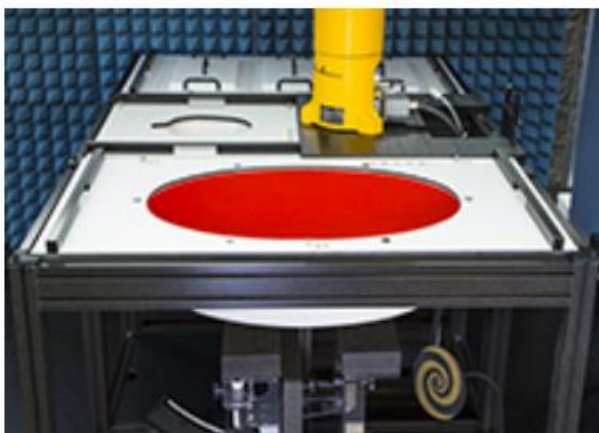

• Flat phantom

Photo of Phantom SN 2159



Serial Number	Shell Thickness (mm)	Major ellipse axis (mm)	Minor axis(mm)
SN 2159 ELI V8.0	2.0 ± 0.2	600	400

4.2.6 Device Holder


The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA"s only. If necessary an additional support of polystyrene material is used. Larger DUT"s (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

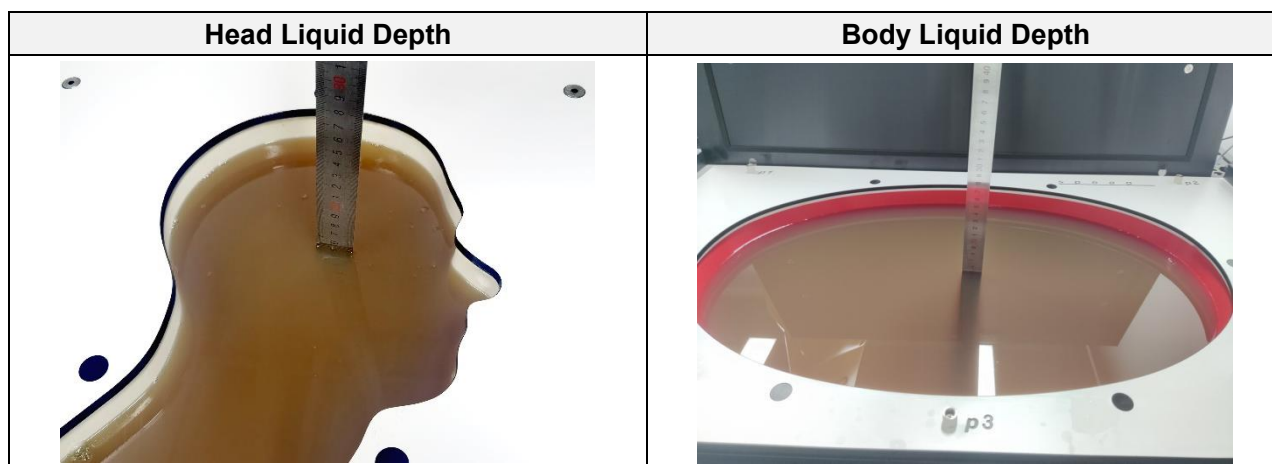

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

The following table gives the recipes for tissue simulating liquid.

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Head WideBand	SPEAG HBBL600-10000V6	600-10000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxylated alcohol


5 SYSTEM VERIFICATION

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup


In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

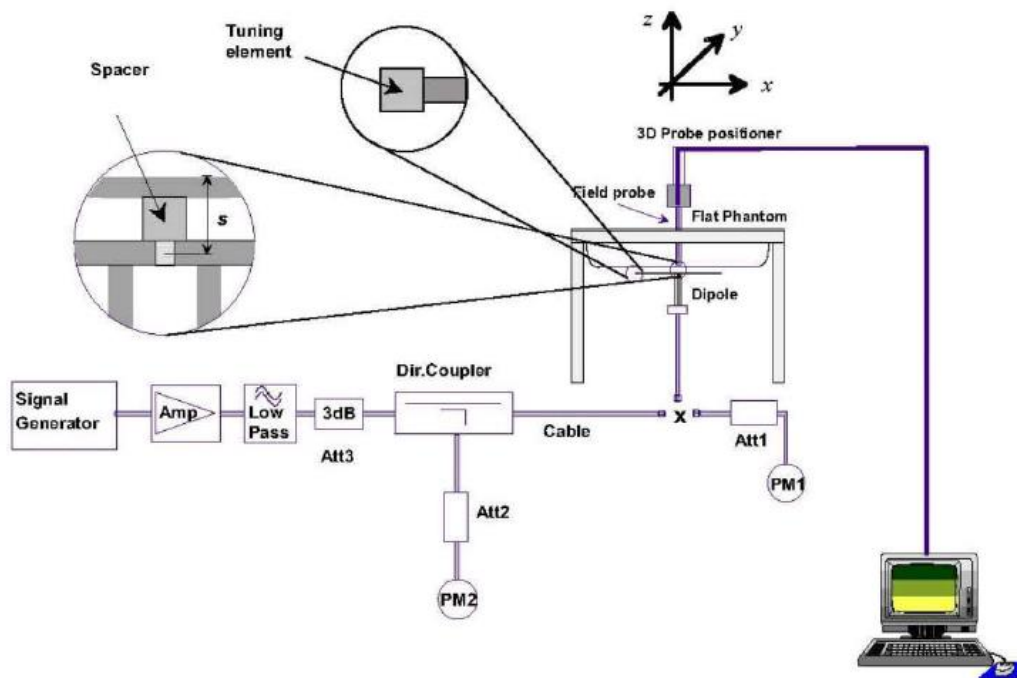

6 TEST POSITION CONFIGURATIONS

6.1 Laptop Exposure Condition

This DUT should consider one position which is bottom of laptop touching with phantom 0 mm air gap and the screen portion of the device shall be an open position at a 90° angle.

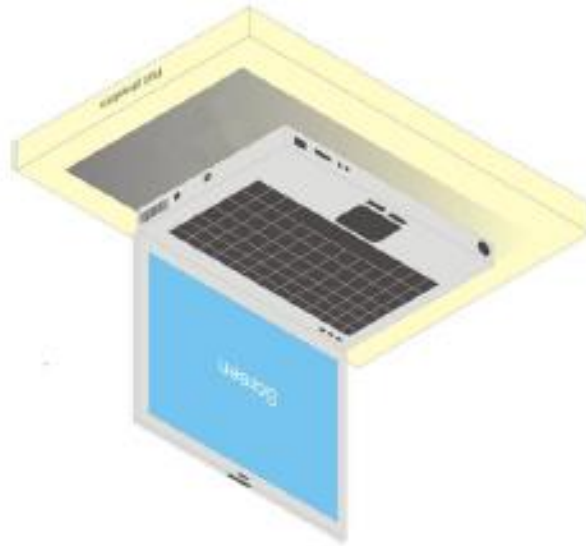


6.2 Product Specific 10g Exposure Consideration

According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

7 MEASUREMENT PROCEDURE

7.1 Measurement Process Diagram

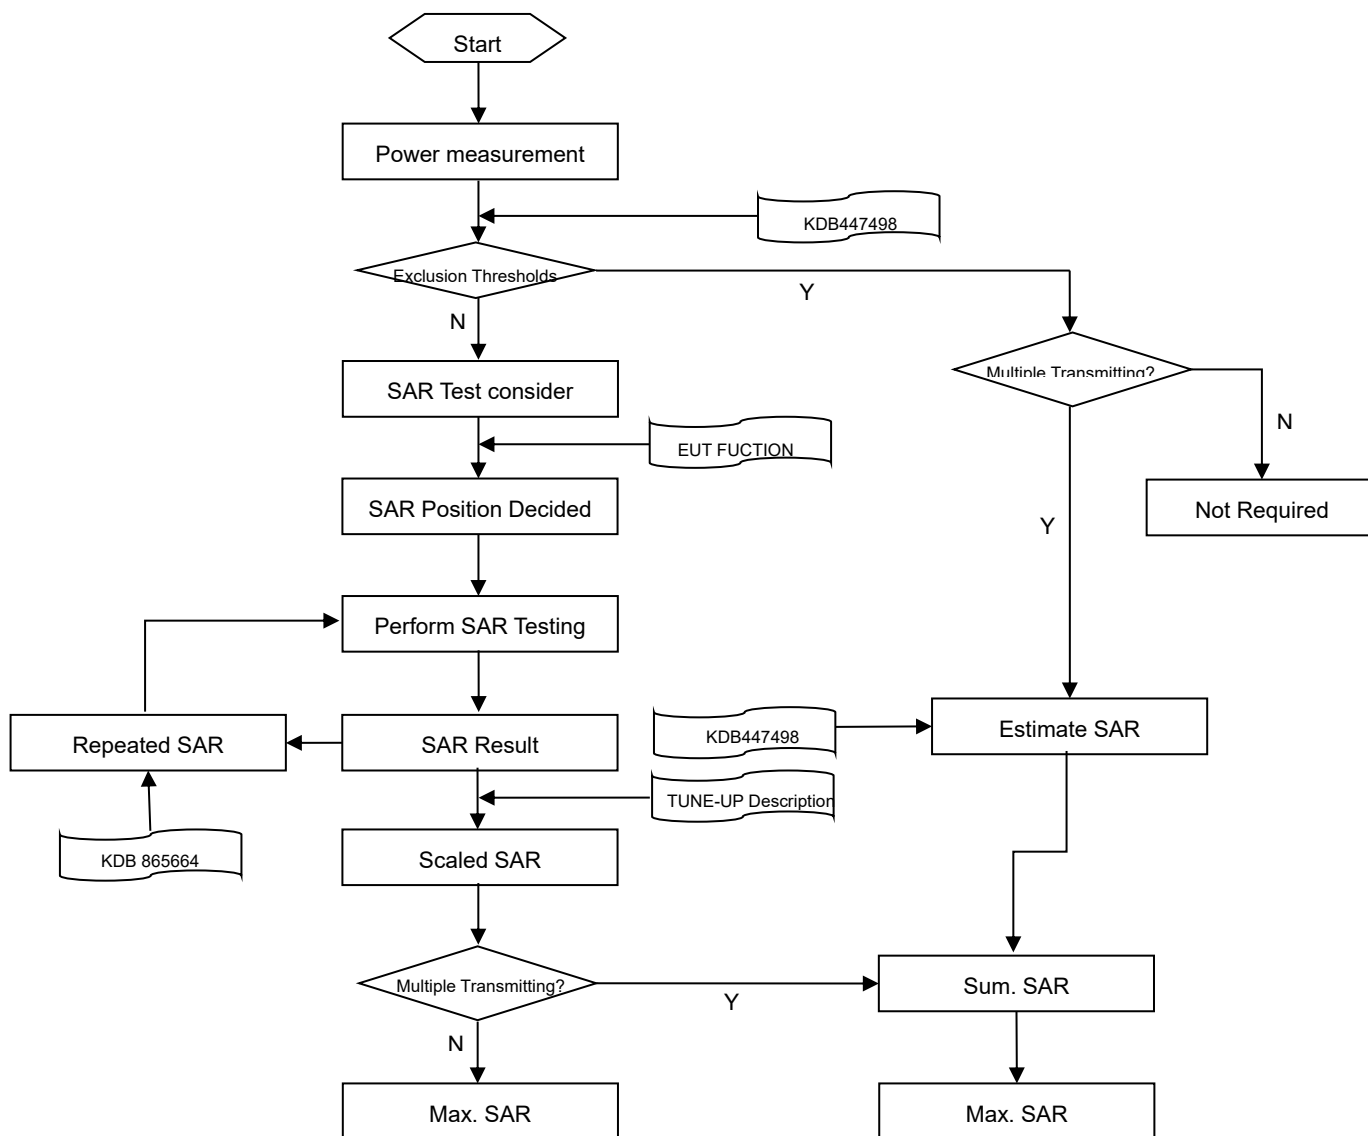

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
				5–6 GHz: ≤ 2 mm
	Δz Zoom (n>1): between subsequent points		$\leq 1.5 \cdot \Delta z$ Zoom (n-1)	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm

Note:

1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8 CONDUCTED RF OUPUT POWER

8.1 WIFI

8.1.1 2.4G WIFI (Aux. Antenna) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4	802.11b	1	2412	19.46	20.00	Yes
		6	2437	19.58	20.00	Yes
		11	2462	19.61	20.00	Yes
		12	2467	14.26	15.00	No
		13	2472	11.48	12.00	No
	802.11g	1	2412	16.48	17.00	No
		6	2437	19.81	20.00	No
		11	2462	16.50	17.00	No
		12	2467	12.15	13.00	No
		13	2472	11.41	12.00	No
	VHT20	1	2412	15.38	16.00	No
		6	2437	19.72	20.00	No
		11	2462	15.47	16.00	No
		12	2467	12.56	13.00	No
		13	2472	11.06	12.00	No
	VHT40	3	2422	13.10	14.00	No
		6	2437	17.43	18.00	No
		9	2452	14.17	15.00	No
		10	2457	11.40	12.00	No
		11	2462	10.43	11.00	No
	802.11ax(HE20) (SU)	1	2412	15.11	16.00	No
		6	2437	19.77	20.00	No
		11	2462	15.56	16.00	No
		12	2467	12.47	13.00	No
		13	2472	11.44	12.00	No
	802.11ax(HE40) (SU)	3	2422	14.48	15.00	No
		6	2437	17.61	18.00	No
		9	2452	14.24	15.00	No
		10	2457	11.13	12.00	No
		11	2462	10.62	11.00	No
	802.11ax(HE20) (RU26)/0	1	2412	15.55	16.00	No
	802.11ax(HE20) (RU26)/4	6	2437	19.60	20.00	No
	802.11ax(HE20)	11	2462	15.10	16.00	No

	(RU26)/8					
	802.11ax(HE20) (RU26)/8	12	2467	13.39	14.00	No
	802.11ax(HE20) (RU26)/8	13	2472	8.08	9.00	No
	802.11ax(HE20) (RU52)/37	1	2412	17.10	18.00	No
	802.11ax(HE20) (RU52)/39	6	2437	19.51	20.00	No
	802.11ax(HE20) (RU52)/40	11	2462	17.45	18.00	No
	802.11ax(HE20) (RU52)/40	12	2467	12.21	13.00	No
	802.11ax(HE20) (RU52)/40	13	2472	8.38	9.00	No
	802.11ax(HE20) (RU106)/53	1	2412	18.10	19.00	No
	802.11ax(HE20) (RU106)/53	6	2437	19.29	20.00	No
	802.11ax(HE20) (RU106)/54	11	2462	18.16	19.00	No
	802.11ax(HE20) (RU106)/54	12	2467	15.27	16.00	No
	802.11ax(HE20) (RU106)/54	13	2472	11.61	12.00	No

Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Adjusted SAR = Report SAR * (max power (OFDM)/ max power (DSSS)) = 0.597 * (100.00mW/100.00mW) = 0.597 W/Kg, so the 2.4G OFDM SAR test is not required.

8.1.2 2.4G WIFI (Main Antenna) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4	802.11b	1	2412	19.39	20.00	Yes
		6	2437	19.76	20.00	Yes
		11	2462	19.71	20.00	Yes
		12	2467	14.13	15.00	No
		13	2472	11.50	12.00	No
	802.11g	1	2412	16.51	17.00	No
		6	2437	19.50	20.00	No
		11	2462	16.58	17.00	No
		12	2467	12.71	13.00	No
		13	2472	11.21	12.00	No
	VHT20	1	2412	15.82	16.00	No
		6	2437	19.58	20.00	No
		11	2462	15.24	16.00	No
		12	2467	12.57	13.00	No
		13	2472	11.32	12.00	No
	VHT40	3	2422	14.24	15.00	No
		6	2437	17.38	18.00	No
		9	2452	14.53	15.00	No
		10	2457	11.32	12.00	No
		11	2462	10.56	11.00	No
	802.11ax(HE20) (SU)	1	2412	15.62	16.00	No
		6	2437	19.55	20.00	No
		11	2462	15.18	16.00	No
		12	2467	12.38	13.00	No
		13	2472	11.23	12.00	No
	802.11ax(HE40) (SU)	3	2422	14.28	15.00	No
		6	2437	17.67	18.00	No
		9	2452	14.63	15.00	No
		10	2457	11.34	12.00	No
		11	2462	10.41	11.00	No
	802.11ax(HE20) (RU26)/0	1	2412	16.65	17.00	No
	802.11ax(HE20) (RU26)/4	6	2437	18.37	19.00	No
	802.11ax(HE20) (RU26)/8	11	2462	15.24	16.00	No
	802.11ax(HE20) (RU26)/8	12	2467	13.85	14.00	No
	802.11ax(HE20) (RU26)/8	13	2472	8.18	9.00	No

	802.11ax(HE20) (RU52)/37	1	2412	17.85	18.00	No
	802.11ax(HE20) (RU52)/39	6	2437	19.70	20.00	No
	802.11ax(HE20) (RU52)/40	11	2462	17.43	18.00	No
	802.11ax(HE20) (RU52)/40	12	2467	12.12	13.00	No
	802.11ax(HE20) (RU52)/40	13	2472	8.62	9.00	No
	802.11ax(HE20) (RU106)/53	1	2412	18.44	19.00	No
	802.11ax(HE20) (RU106)/53	6	2437	19.66	20.00	No
	802.11ax(HE20) (RU106)/54	11	2462	18.75	19.00	No
	802.11ax(HE20) (RU106)/54	12	2467	15.60	16.00	No
	802.11ax(HE20) (RU106)/54	13	2472	11.63	12.00	No

Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Adjusted SAR = Report SAR * (max power (OFDM)/ max power (DSSS)) = 0.574 * (100.00mW/100.00mW) = 0.574 W/Kg, so the 2.4G OFDM SAR test is not required.

8.1.3 5G WIFI (Aux. Antenna) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2	802.11a	36	5180	13.56	14.00	No
		40	5200	13.40	14.00	No
		48	5240	13.65	14.00	No
	802.11n(HT20)	36	5180	13.41	14.00	No
		40	5200	13.16	14.00	No
		48	5240	13.76	14.00	No
	802.11n(HT40)	38	5190	13.52	14.00	No
		46	5230	13.41	14.00	No
	802.11ac(VHT20)	36	5180	13.36	14.00	No
		40	5200	13.31	14.00	No
		48	5240	13.49	14.00	No
	802.11ac(VHT40)	38	5190	13.71	14.00	No
		46	5230	13.18	14.00	No
	802.11ac(VHT80)	42	5210	13.30	14.00	No
	802.11ax(HE20) (SU)	36	5180	13.53	14.00	No
		40	5200	13.84	14.00	No
		48	5240	13.83	14.00	No
	802.11ax(HE40) (SU)	38	5190	13.57	14.00	No
		46	5230	13.54	14.00	No
	802.11ax(HE80) (SU)	42	5210	13.37	14.00	No
	802.11ax(HE20) (RU26)/0	36	5180	8.34	9.00	No
	802.11ax(HE20) (RU26)/4	40	5200	10.50	11.00	No
	802.11ax(HE20) (RU26)/8	48	5240	9.34	10.00	No
	802.11ax(HE20) (RU52)/37	36	5180	10.14	11.00	No
	802.11ax(HE20) (RU52)/39	40	5200	11.06	12.00	No
	802.11ax(HE20) (RU52)/40	48	5240	10.56	11.00	No
	802.11ax(HE20) (RU106)/53	36	5180	13.70	14.00	No
	802.11ax(HE20) (RU106)/53	40	5200	13.50	14.00	No
	802.11ax(HE20) (RU106)/54	48	5240	13.46	14.00	No
5.3	802.11a	52	5260	13.09	14.00	No

		60	5300	13.73	14.00	No
		64	5320	13.45	14.00	No
	802.11n(HT20)	52	5260	13.28	14.00	No
		60	5300	13.60	14.00	No
		64	5320	13.52	14.00	No
	802.11n(HT40)	54	5270	13.49	14.00	No
		62	5310	13.82	14.00	No
	802.11ac(VHT20)	52	5260	13.06	14.00	No
		60	5300	13.81	14.00	No
		64	5320	13.33	14.00	No
	802.11ac(VHT40)	54	5270	13.83	14.00	No
		62	5310	13.70	14.00	No
	802.11ac(VHT80)	58	5290	13.90	14.00	Yes
	802.11ax(HE20) (SU)	52	5260	13.33	14.00	No
		60	5300	13.37	14.00	No
		64	5320	13.25	14.00	No
	802.11ax(HE40) (SU)	54	5270	13.10	14.00	No
		62	5310	13.68	14.00	No
	802.11ax(HE80) (SU)	58	5290	13.50	14.00	No
	802.11ax(HE20) (RU26)/0	52	5260	9.41	10.00	No
	802.11ax(HE20) (RU26)/4	60	5300	10.21	11.00	No
	802.11ax(HE20) (RU26)/8	64	5320	8.82	9.00	No
	802.11ax(HE20) (RU52)/37	52	5260	10.51	11.00	No
	802.11ax(HE20) (RU52)/39	60	5300	11.17	12.00	No
	802.11ax(HE20) (RU52)/40	64	5320	10.82	11.00	No
	802.11ax(HE20) (RU106)/53	52	5260	13.16	14.00	No
	802.11ax(HE20) (RU106)/54	60	5300	13.38	14.00	No
	802.11ax(HE20) (RU106)/54	64	5320	13.75	14.00	No
5.6	802.11a	100	5500	13.38	14.00	No
		116	5580	13.59	14.00	No
		140	5700	13.74	14.00	No
		144	5720	13.73	14.00	No
	802.11n(HT20)	100	5500	13.82	14.00	No

		116	5580	13.40	14.00	No
		140	5700	13.16	14.00	No
		144	5720	13.23	14.00	No
	802.11n(HT40)	102	5510	13.36	14.00	No
		110	5550	13.66	14.00	No
		134	5670	13.49	14.00	No
		142	5710	13.81	14.00	No
	802.11ac(VHT20)	100	5500	13.67	14.00	No
		116	5580	13.10	14.00	No
		140	5700	13.08	14.00	No
		144	5720	13.07	14.00	No
	802.11ac(VHT40)	102	5510	13.55	14.00	No
		110	5550	13.09	14.00	No
		134	5670	13.28	14.00	No
		142	5710	13.23	14.00	No
	802.11ac(VHT80)	106	5530	13.59	14.00	Yes
		122	5610	13.51	14.00	Yes
		138	5690	13.81	14.00	Yes
	802.11ax(HE20) (SU)	100	5500	13.30	14.00	No
		116	5580	13.35	14.00	No
		140	5700	13.74	14.00	No
		144	5720	13.22	14.00	No
	802.11ax(HE40) (SU)	102	5510	13.25	14.00	No
		110	5550	13.44	14.00	No
		134	5670	13.19	14.00	No
		142	5710	13.83	14.00	No
	802.11ax(HE80) (SU)	106	5530	13.43	14.00	No
		122	5610	13.49	14.00	No
		138	5690	13.23	14.00	No
	802.11ax(HE20) (RU26)/0	100	5500	9.74	10.00	No
	802.11ax(HE20) (RU26)/4	116	5580	10.64	11.00	No
	802.11ax(HE20) (RU26)/8	140	5700	9.18	10.00	No
	802.11ax(HE20) (RU26)/8	144	5720	9.58	10.00	No
	802.11ax(HE20) (RU26)/0	144	5720	9.31	10.00	No
	802.11ax(HE20) (RU52)/37	100	5500	11.35	12.00	No
	802.11ax(HE20) (RU52)/39	116	5580	11.21	12.00	No

	802.11ax(HE20) (RU52)/40	140	5700	10.59	11.00	No
	802.11ax(HE20) (RU52)/40	144	5720	9.36	10.00	No
	802.11ax(HE20) (RU52)/37	144	5720	12.71	13.00	No
	802.11ax(HE20) (RU106)/53	100	5500	13.50	14.00	No
	802.11ax(HE20) (RU106)/53	116	5580	12.76	13.00	No
	802.11ax(HE20) (RU106)/54	140	5700	13.24	14.00	No
	802.11ax(HE20) (RU106)/54	144	5720	10.07	11.00	No
	802.11ax(HE20) (RU106)/53	144	5720	13.18	14.00	No
5.8	802.11a	149	5745	13.79	14.00	No
		157	5785	13.36	14.00	No
		165	5825	13.44	14.00	No
	802.11n(HT20)	149	5745	13.16	14.00	No
		157	5785	13.58	14.00	No
		165	5825	13.85	14.00	No
	802.11n(HT40)	151	5755	13.64	14.00	No
		159	5795	13.72	14.00	No
	802.11ac(VHT20)	149	5745	13.39	14.00	No
		157	5785	13.58	14.00	No
		165	5825	13.14	14.00	No
	802.11ac(VHT40)	151	5755	13.09	14.00	No
		159	5795	13.33	14.00	No
	802.11ac(VHT80)	155	5775	13.58	14.00	Yes
	802.11ax(HE20) (SU)	149	5745	13.76	14.00	No
		157	5785	13.60	14.00	No
		165	5825	13.56	14.00	No
	802.11ax(HE40) (SU)	151	5755	13.41	14.00	No
		159	5795	13.56	14.00	No
	802.11ax(HE80) (SU)	155	5775	13.47	14.00	No
	802.11ax(HE20) (RU26)/0	149	5745	13.33	14.00	No
	802.11ax(HE20) (RU26)/4	157	5785	13.80	14.00	No
	802.11ax(HE20) (RU26)/8	165	5825	13.41	14.00	No

	802.11ax(HE20) (RU52)/37	149	5745	13.05	14.00	No
	802.11ax(HE20) (RU52)/39	157	5785	13.57	14.00	No
	802.11ax(HE20) (RU52)/40	165	5825	13.32	14.00	No
	802.11ax(HE20) (RU106)/53	149	5745	13.15	14.00	No
	802.11ax(HE20) (RU106)/54	157	5785	13.33	14.00	No
	802.11ax(HE20) (RU106)/54	165	5825	13.65	14.00	No
5.9	802.11a	169	5845	13.28	14.00	No
		173	5865	13.78	14.00	No
		177	5885	13.15	14.00	No
	802.11n(HT20)	169	5845	13.84	14.00	No
		173	5865	13.66	14.00	No
		177	5885	13.59	14.00	No
	802.11n(HT40)	167	5835	13.09	14.00	No
		175	5875	13.13	14.00	No
	802.11ac(VHT20)	169	5845	13.78	14.00	No
		173	5865	13.19	14.00	No
		177	5885	13.35	14.00	No
	802.11ac(VHT40)	167	5835	13.49	14.00	No
		175	5875	13.38	14.00	No
	802.11ac(VHT80)	171	5855	13.79	14.00	Yes
	802.11ax(HE20) (SU)	169	5845	13.33	14.00	No
		173	5865	13.28	14.00	No
		177	5885	13.77	14.00	No
	802.11ax(HE40) (SU)	167	5835	13.22	14.00	No
		175	5875	13.38	14.00	No
	802.11ax(HE80) (SU)	171	5855	13.20	14.00	No
	802.11ax(HE20) (RU26)/0	169	5845	13.36	14.00	No
	802.11ax(HE20) (RU26)/4	173	5865	13.44	14.00	No
	802.11ax(HE20) (RU26)/8	177	5885	13.81	14.00	No
	802.11ax(HE20) (RU52)/37	169	5845	13.56	14.00	No
	802.11ax(HE20) (RU52)/39	173	5865	13.34	14.00	No

	802.11ax(HE20) (RU52)/40	177	5885	13.19	14.00	No
	802.11ax(HE20) (RU106)/53	169	5845	13.79	14.00	No
	802.11ax(HE20) (RU106)/54	173	5865	13.41	14.00	No
	802.11ax(HE20) (RU106)/54	177	5885	13.29	14.00	No

Note: When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

8.1.4 5G WIFI (Main Antenna) (Laptop Mode)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2	802.11a	36	5180	13.53	14.00	No
		40	5200	13.21	14.00	No
		48	5240	13.53	14.00	No
	802.11n(HT20)	36	5180	13.75	14.00	No
		40	5200	13.18	14.00	No
		48	5240	13.74	14.00	No
	802.11n(HT40)	38	5190	13.21	14.00	No
		46	5230	13.31	14.00	No
	802.11ac(VHT20)	36	5180	13.35	14.00	No
		40	5200	13.80	14.00	No
		48	5240	13.22	14.00	No
	802.11ac(VHT40)	38	5190	13.23	14.00	No
		46	5230	13.76	14.00	No
	802.11ac(VHT80)	42	5210	13.48	14.00	No
	802.11ax(HE20) (SU)	36	5180	13.48	14.00	No
		40	5200	13.24	14.00	No
		48	5240	13.14	14.00	No
	802.11ax(HE40) (SU)	38	5190	13.79	14.00	No
		46	5230	13.55	14.00	No
	802.11ax(HE80) (SU)	42	5210	13.65	14.00	No
	802.11ax(HE20) (RU26)/0	36	5180	8.41	10.00	No
	802.11ax(HE20) (RU26)/4	40	5200	10.22	11.00	No
	802.11ax(HE20) (RU26)/8	48	5240	9.60	10.00	No
	802.11ax(HE20) (RU52)/37	36	5180	10.33	12.00	No
	802.11ax(HE20) (RU52)/39	40	5200	11.33	13.00	No
	802.11ax(HE20) (RU52)/40	48	5240	10.58	12.00	No
	802.11ax(HE20) (RU106)/53	36	5180	13.44	14.00	No
	802.11ax(HE20) (RU106)/53	40	5200	13.34	14.00	No
	802.11ax(HE20) (RU106)/54	48	5240	13.54	14.00	No
5.3	802.11a	52	5260	13.12	14.00	No

		60	5300	13.40	14.00	No
		64	5320	13.83	14.00	No
	802.11n(HT20)	52	5260	13.42	14.00	No
		60	5300	13.57	14.00	No
		64	5320	13.60	14.00	No
	802.11n(HT40)	54	5270	13.39	14.00	No
		62	5310	13.19	14.00	No
	802.11ac(VHT20)	52	5260	13.28	14.00	No
		60	5300	13.68	14.00	No
		64	5320	13.54	14.00	No
	802.11ac(VHT40)	54	5270	13.19	14.00	No
		62	5310	13.27	14.00	No
	802.11ac(VHT80)	58	5290	13.87	14.00	Yes
	802.11ax(HE20) (SU)	52	5260	13.69	14.00	No
		60	5300	13.35	14.00	No
		64	5320	13.70	14.00	No
	802.11ax(HE40) (SU)	54	5270	13.31	14.00	No
		62	5310	13.27	14.00	No
	802.11ax(HE80) (SU)	58	5290	13.10	14.00	No
	802.11ax(HE20) (RU26)/0	52	5260	9.47	10.00	No
	802.11ax(HE20) (RU26)/4	60	5300	10.25	11.00	No
	802.11ax(HE20) (RU26)/8	64	5320	8.80	10.00	No
	802.11ax(HE20) (RU52)/37	52	5260	10.18	13.00	No
	802.11ax(HE20) (RU52)/39	60	5300	11.61	13.00	No
	802.11ax(HE20) (RU52)/40	64	5320	10.47	12.00	No
	802.11ax(HE20) (RU106)/53	52	5260	13.17	14.00	No
	802.11ax(HE20) (RU106)/54	60	5300	13.49	14.00	No
	802.11ax(HE20) (RU106)/54	64	5320	13.61	14.00	No
5.6	802.11a	100	5500	13.39	14.00	No
		116	5580	13.85	14.00	No
		140	5700	13.12	14.00	No
		144	5720	13.60	14.00	No
	802.11n(HT20)	100	5500	13.25	14.00	No

		116	5580	13.49	14.00	No
		140	5700	13.30	14.00	No
		144	5720	13.76	14.00	No
	802.11n(HT40)	102	5510	13.71	14.00	No
		110	5550	13.53	14.00	No
		134	5670	13.48	14.00	No
		142	5710	13.64	14.00	No
	802.11ac(VHT20)	100	5500	13.26	14.00	No
		116	5580	13.38	14.00	No
		140	5700	13.67	14.00	No
		144	5720	13.41	14.00	No
	802.11ac(VHT40)	102	5510	13.52	14.00	No
		110	5550	13.06	14.00	No
		134	5670	13.64	14.00	No
		142	5710	13.77	14.00	No
	802.11ac(VHT80)	106	5530	13.87	14.00	Yes
		122	5610	13.53	14.00	Yes
		138	5690	13.88	14.00	Yes
	802.11ax(HE20) (SU)	100	5500	13.43	14.00	No
		116	5580	13.27	14.00	No
		140	5700	13.56	14.00	No
		144	5720	13.73	14.00	No
	802.11ax(HE40) (SU)	102	5510	13.52	14.00	No
		110	5550	13.40	14.00	No
		134	5670	13.27	14.00	No
		142	5710	13.74	14.00	No
	802.11ax(HE80) (SU)	106	5530	13.64	14.00	No
		122	5610	13.13	14.00	No
		138	5690	13.34	14.00	No
	802.11ax(HE20) (RU26)/0	100	5500	9.46	10.00	No
	802.11ax(HE20) (RU26)/4	116	5580	9.56	10.00	No
	802.11ax(HE20) (RU26)/8	140	5700	9.82	10.00	No
	802.11ax(HE20) (RU26)/8	144	5720	10.71	11.00	No
	802.11ax(HE20) (RU26)/0	144	5720	10.56	11.00	No
	802.11ax(HE20) (RU52)/37	100	5500	11.66	12.00	No
	802.11ax(HE20) (RU52)/39	116	5580	11.56	12.00	No

	802.11ax(HE20) (RU52)/40	140	5700	10.14	11.00	No
	802.11ax(HE20) (RU52)/40	144	5720	11.74	12.00	No
	802.11ax(HE20) (RU52)/37	144	5720	11.15	12.00	No
	802.11ax(HE20) (RU106)/53	100	5500	13.24	14.00	No
	802.11ax(HE20) (RU106)/53	116	5580	13.23	14.00	No
	802.11ax(HE20) (RU106)/54	140	5700	13.81	14.00	No
	802.11ax(HE20) (RU106)/54	144	5720	11.36	12.00	No
	802.11ax(HE20) (RU106)/53	144	5720	12.27	13.00	No
5.8	802.11a	149	5745	13.63	14.00	No
		157	5785	13.57	14.00	No
		165	5825	13.39	14.00	No
	802.11n(HT20)	149	5745	13.51	14.00	No
		157	5785	13.6	14.00	No
		165	5825	13.06	14.00	No
	802.11n(HT40)	151	5755	13.07	14.00	No
		159	5795	13.57	14.00	No
	802.11ac(VHT20)	149	5745	13.67	14.00	No
		157	5785	13.20	14.00	No
		165	5825	13.43	14.00	No
	802.11ac(VHT40)	151	5755	13.26	14.00	No
		159	5795	13.80	14.00	No
	802.11ac(VHT80)	155	5775	13.63	14.00	Yes
	802.11ax(HE20) (SU)	149	5745	13.83	14.00	No
		157	5785	13.63	14.00	No
		165	5825	13.11	14.00	No
	802.11ax(HE40) (SU)	151	5755	13.14	14.00	No
		159	5795	13.59	14.00	No
	802.11ax(HE80) (SU)	155	5775	13.59	14.00	No
	802.11ax(HE20) (RU26)/0	149	5745	13.25	14.00	No
	802.11ax(HE20) (RU26)/4	157	5785	13.72	14.00	No
	802.11ax(HE20) (RU26)/8	165	5825	13.75	14.00	No

	802.11ax(HE20) (RU52)/37	149	5745	13.61	14.00	No
	802.11ax(HE20) (RU52)/39	157	5785	13.48	14.00	No
	802.11ax(HE20) (RU52)/40	165	5825	13.11	14.00	No
	802.11ax(HE20) (RU106)/53	149	5745	13.78	14.00	No
	802.11ax(HE20) (RU106)/54	157	5785	13.24	14.00	No
	802.11ax(HE20) (RU106)/54	165	5825	13.85	14.00	No
5.9	802.11a	169	5845	13.55	14.00	No
		173	5865	13.76	14.00	No
		177	5885	13.80	14.00	No
	802.11n(HT20)	169	5845	13.22	14.00	No
		173	5865	13.62	14.00	No
		177	5885	13.40	14.00	No
	802.11n(HT40)	167	5835	13.24	14.00	No
		175	5875	13.14	14.00	No
	802.11ac(VHT20)	169	5845	13.40	14.00	No
		173	5865	13.58	14.00	No
		177	5885	13.32	14.00	No
	802.11ac(VHT40)	167	5835	13.84	14.00	No
		175	5875	13.42	14.00	No
	802.11ac(VHT80)	171	5855	13.80	14.00	Yes
	802.11ax(HE20) (SU)	169	5845	13.27	14.00	No
		173	5865	13.83	14.00	No
		177	5885	13.39	14.00	No
	802.11ax(HE40) (SU)	167	5835	13.63	14.00	No
		175	5875	13.49	14.00	No
	802.11ax(HE80) (SU)	171	5855	13.84	14.00	No
	802.11ax(HE20) (RU26)/0	169	5845	13.84	14.00	No
	802.11ax(HE20) (RU26)/4	173	5865	13.12	14.00	No
	802.11ax(HE20) (RU26)/8	177	5885	13.57	14.00	No
	802.11ax(HE20) (RU52)/37	169	5845	13.43	14.00	No
	802.11ax(HE20) (RU52)/39	173	5865	13.80	14.00	No

	802.11ax(HE20) (RU52)/40	177	5885	13.47	14.00	No
	802.11ax(HE20) (RU106)/53	169	5845	13.63	14.00	No
	802.11ax(HE20) (RU106)/54	173	5865	13.16	14.00	No
	802.11ax(HE20) (RU106)/54	177	5885	13.78	14.00	No

Note: When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

8.2 Bluetooth

8.2.1 Bluetooth (Aux. Antenna)


Mode	GFSK			$\pi/4$ -DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Average Power (dBm)	11.88	11.98	11.37	9.07	9.36	8.67
Tune-Up Limit (dBm)	12.50	12.50	12.50	10.00	10.00	10.00
SAR Test Require	Yes	Yes	Yes	No	No	No
Mode	8-DPSK			/		
Channel	0	39	78	/	/	/
Frequency (MHz)	2402	2441	2480	/	/	/
Average Power (dBm)	9.22	8.66	8.61	/	/	/
Tune-Up Limit (dBm)	10.00	10.00	10.00	/	/	/
SAR Test Require	No	No	No	/	/	/
Mode	BLE-1Mbps			BLE-2Mbps		
Channel	0	19	39	1	19	38
Frequency (MHz)	2402	2440	2480	2404	2440	2478
Average Power (dBm)	11.67	11.93	11.77	11.69	11.97	11.76
Tune-Up Limit (dBm)	12.00	12.00	12.00	12.00	12.00	12.00
SAR Test Require	No	No	No	No	No	No

Note: Since Bluetooth BR mode is the maximum output power mode, SAR measurements were performed with test software using DH5 modulation, and SAR measurement is not required for the EDR and LE. When the secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode.

The Bluetooth duty cycle is 77.30% as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.


Duty Cycle


Bluetooth-GFSK

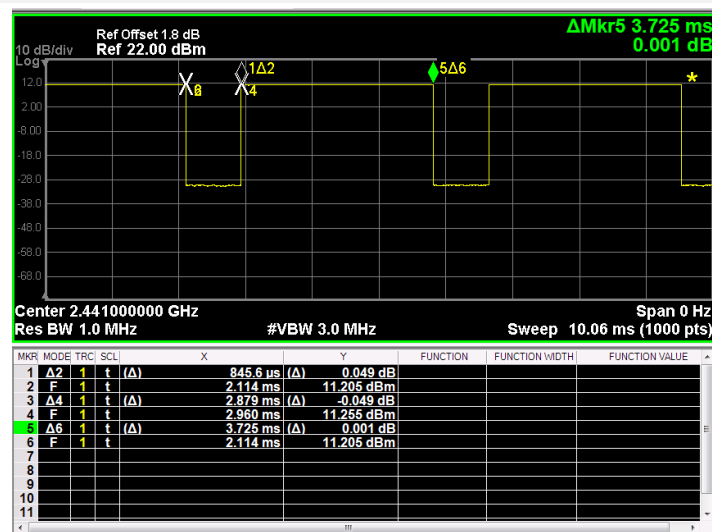


9 TEST EXCLUSION CONSIDERATION

9.1 Antenna Location Sketch

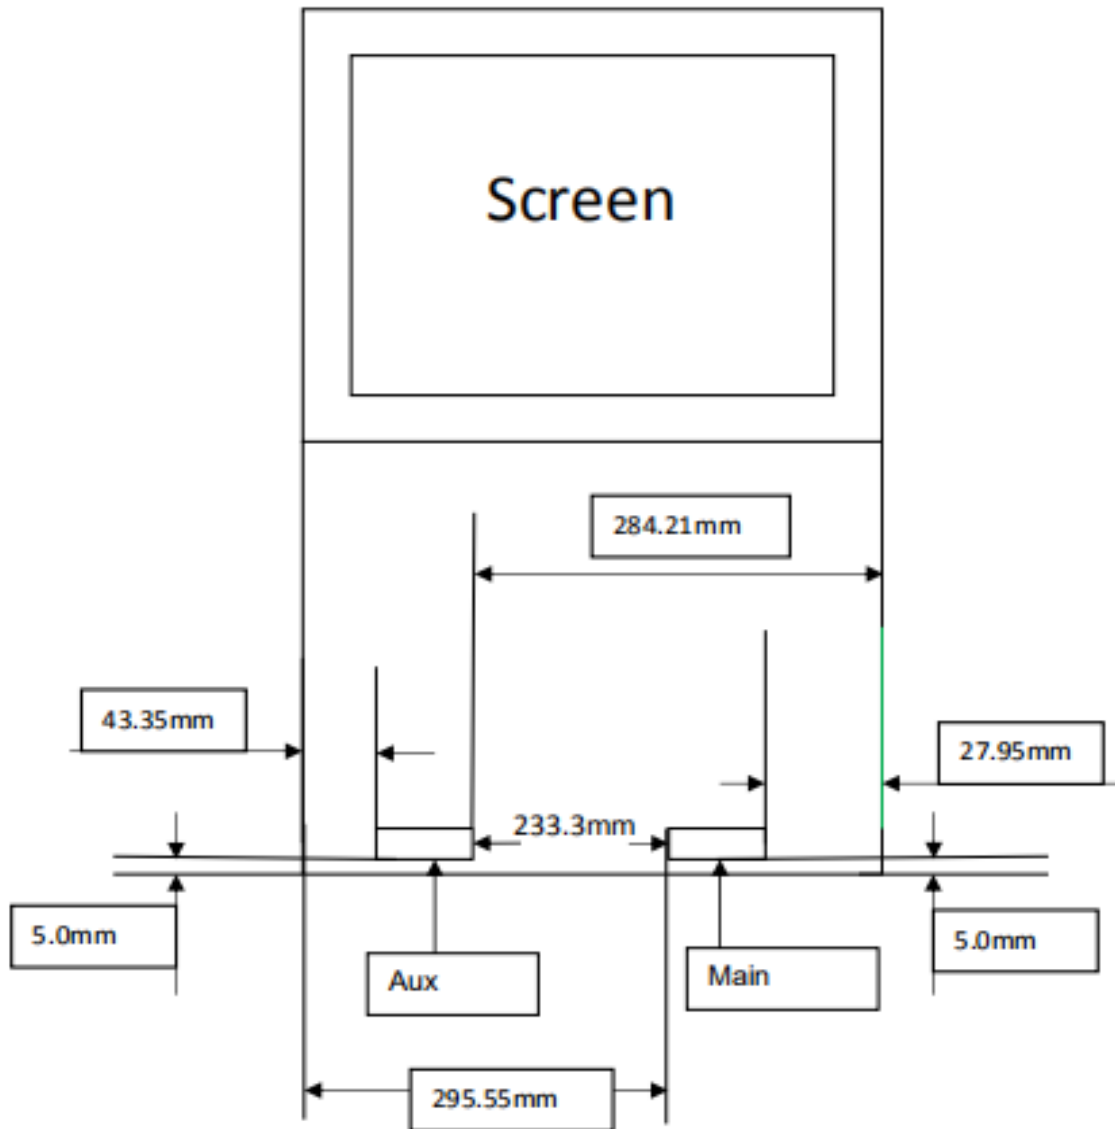

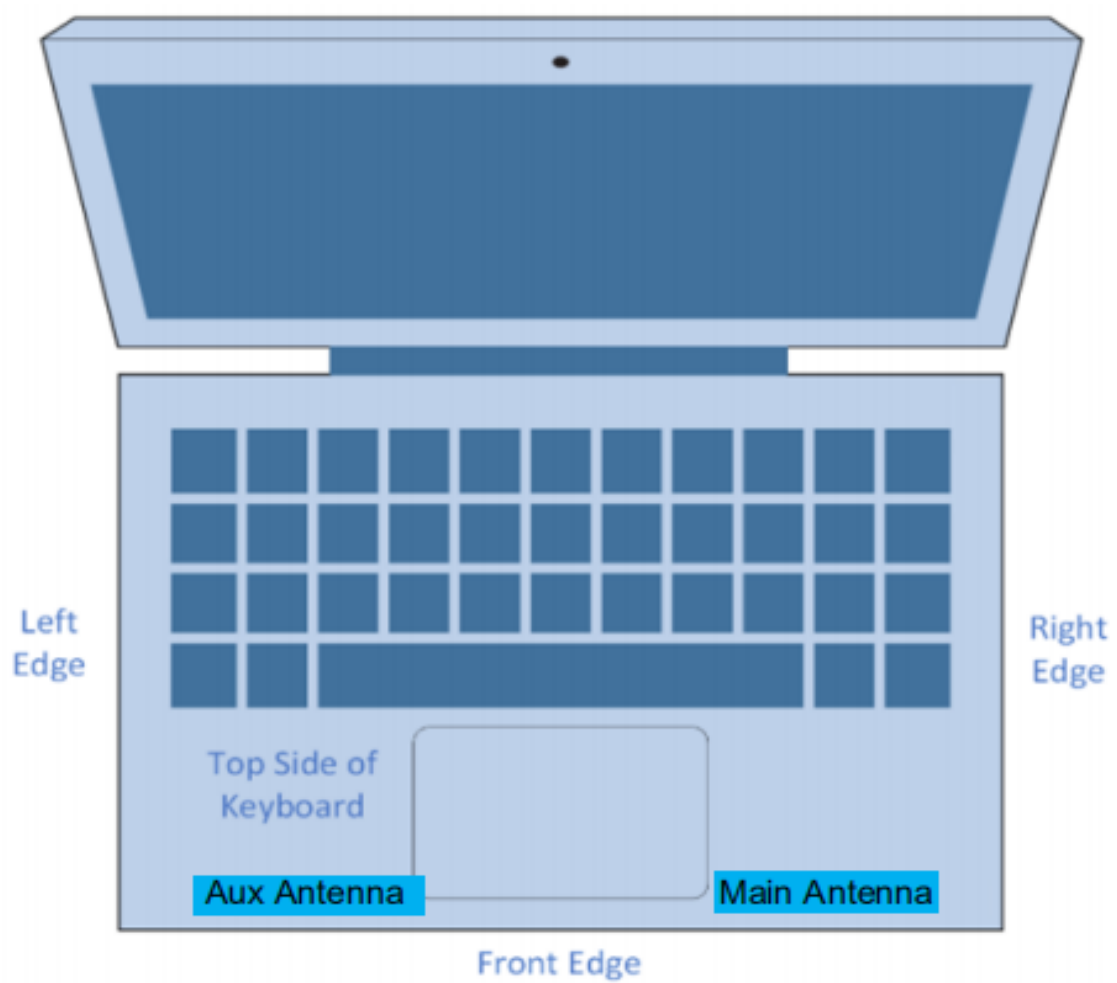

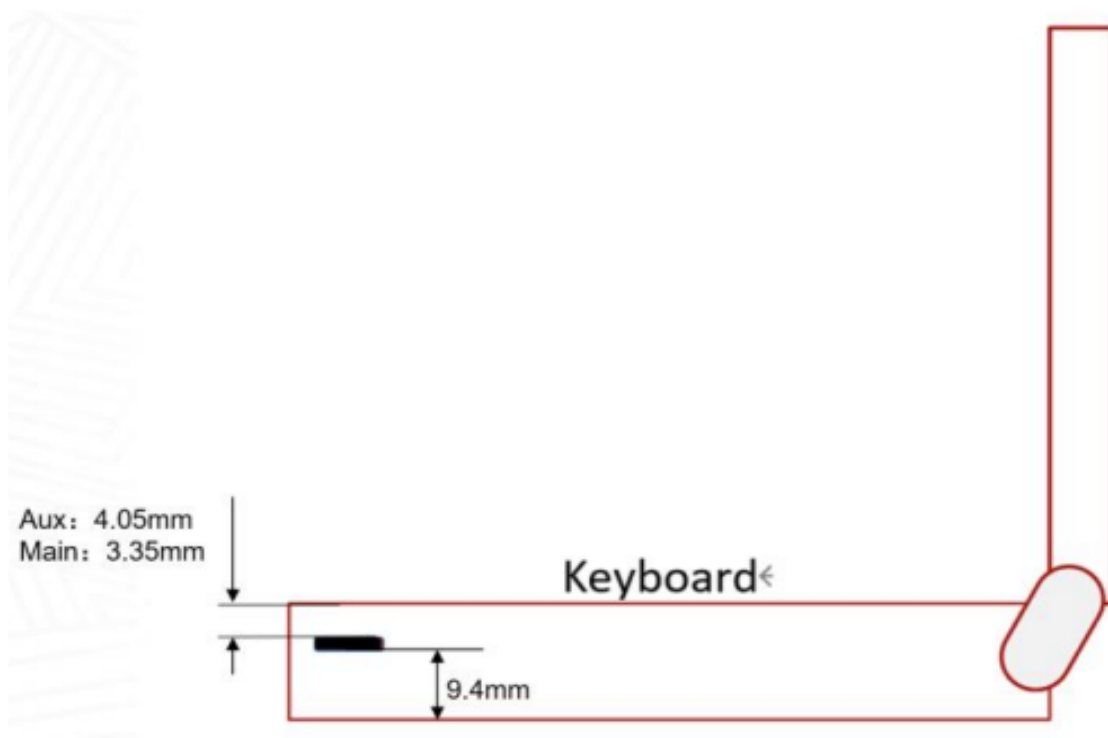

Antenna	Support Bands
Aux.	WLAN 2.4G/5G/BT
Main	WLAN 2.4G/5G

9.2 SAR Test Consideration Table

According with FCC KDB 447498 D04, Appendix B, The SAR-based exemption formula applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold Pth (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). The following table shows the power threshold from 5mm to 50mm.

Power Thresholds (mW)					
Frequency (MHz)	At separation distance of ≤ 5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
300	39 mW	65 mW	88 mW	110 mW	129 mW
450	22 mW	44 mW	67 mW	89 mW	112 mW
835	9 mW	25 mW	44 mW	66 mW	90 mW
1900	3 mW	12 mW	26 mW	44 mW	66 mW
2450	3 mW	10 mW	22 mW	38 mW	59 mW
3600	2 mW	8 mW	18 mW	32 mW	49 mW
5800	1 mW	6 mW	14 mW	25 mW	40 mW
Frequency (MHz)	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of 50 mm
300	148 mW	166 mW	184 mW	201 mW	217 mW
450	135 mW	158 mW	180 mW	203 mW	226 mW
835	116 mW	145 mW	175 mW	207 mW	240 mW
1900	92 mW	122 mW	157 mW	195 mW	236 mW
2450	83 mW	111 mW	143 mW	179 mW	219 mW
3600	71 mW	96 mW	125 mW	158 mW	195 mW
5800	58 mW	80 mW	106 mW	136 mW	169 mW

9.2.1 SAR Test Consideration

This host is a notebook computer, under normal use the RF exposure scenarios are shown in the table below:

RF Exposure Position	RF Exposure Scenarios
Bottom Side	Body
Front Edge	Body
Left Edge	Limbs
Right Edge	Limbs
Keyboard Side	Limbs

Aux. Antenna Body RF exposure scenarios

Test Position Configurations	Mode	Bluetooth	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3	U-NII-4
Calculated Frequency (MHz)		2480	2462	5320	5710	5825	5925
Bottom Side	Distance to User (mm)	9.4					
	Max. Peak Power (dBm)	12.50	20.00	14.00	14.00	14.00	14.00
	Max. Peak Power (mW)	17.78	100.00	25.12	25.12	25.12	25.12
	Exclusion Threshold (mW)	9.04	9.09	5.45	5.20	5.13	5.07
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes
Front Edge	Distance to User (mm)	5					
	Max. Peak Power (dBm)	12.50	20.00	14.00	14.00	14.00	14.00
	Max. Peak Power (mW)	17.78	100.00	25.12	25.12	25.12	25.12
	Exclusion Threshold (mW)	2.72	2.73	1.47	1.39	1.37	1.35
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes

Main Antenna Body RF exposure scenarios

Test Position Configurations	Mode	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3	U-NII-4
Calculated Frequency (MHz)		2462	5320	5710	5825	5925
Bottom Side	Distance to User (mm)	9.4				
	Max. Peak Power (dBm)	20.00	14.00	14.00	14.00	14.00
	Max. Peak Power (mW)	100.00	25.12	25.12	25.12	25.12
	Exclusion Threshold (mW)	9.09	5.45	5.20	5.13	5.07
	SAR Test Required	Yes	Yes	Yes	Yes	Yes
Front Edge	Distance to User (mm)	5				
	Max. Peak Power (dBm)	20.00	14.00	14.00	14.00	14.00
	Max. Peak Power (mW)	100.00	25.12	25.12	25.12	25.12
	Exclusion Threshold (mW)	2.73	1.47	1.39	1.37	1.35
	SAR Test Required	Yes	Yes	Yes	Yes	Yes

Aux. Antenna Limbs RF exposure scenarios

Test Position Configurations	Mode	Bluetooth	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3	U-NII-4
Calculated Frequency (MHz)		2480	2462	5320	5710	5825	5925
Left Edge	Distance to User (mm)	43.35					
	Max. Peak Power (dBm)	12.50	20.00	14.00	14.00	14.00	14.00
	Max. Peak Power (mW)	17.78	100.00	25.12	25.12	25.12	25.12
	Exclusion Threshold (mW)	332.57	333.38	258.13	252.14	250.47	249.06
	SAR Test Required	No	No	No	No	No	No
Right Edge	Distance to User (mm)	284.21					
	Max. Peak Power (dBm)	12.50	20.00	14.00	14.00	14.00	14.00
	Max. Peak Power (mW)	17.78	100.00	25.12	25.12	25.12	25.12
	Exclusion Threshold (mW)	11952.01	11945.37	12668.73	12737.30	12756.70	12773.28
	SAR Test Required	No	No	No	No	No	No
Keyboard Side	Distance to User (mm)	4.05					
	Max. Peak Power (dBm)	12.50	20.00	14.00	14.00	14.00	14.00
	Max. Peak Power (mW)	17.78	100.00	25.12	25.12	25.12	25.12
	Exclusion Threshold (mW)	3.64	3.66	1.91	1.80	1.77	1.74
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes

Main Antenna Limbs RF exposure scenarios

Test Position Configurations	Mode	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3	U-NII-4
Calculated Frequency (MHz)		2462	5320	5710	5825	5925
Left Edge	Distance to User (mm)	295.55				
	Max. Peak Power (dBm)	20.00	14.00	14.00	14.00	14.00
	Max. Peak Power (mW)	100.00	25.12	25.12	25.12	25.12
	Exclusion Threshold (mW)	12868.81	13737.72	13820.38	13843.77	13863.77
	SAR Test Required	No	No	No	No	No
Right Edge	Distance to User (mm)	27.95				
	Max. Peak Power (dBm)	20.00	14.00	14.00	14.00	14.00
	Max. Peak Power (mW)	100.00	25.12	25.12	25.12	25.12
	Exclusion Threshold (mW)	144.60	104.04	100.94	100.08	99.36
	SAR Test Required	No	No	No	No	No
Keyboard Side	Distance to User (mm)	3.35				
	Max. Peak Power (dBm)	20.00	14.00	14.00	14.00	14.00
	Max. Peak Power (mW)	100.00	25.12	25.12	25.12	25.12
	Exclusion Threshold (mW)	2.55	1.29	1.21	1.19	1.17
	SAR Test Required	Yes	Yes	Yes	Yes	Yes

Note:

1. Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units
2. Per KDB 447498 D04, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D04, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
4. Per KDB 447498 D04, for separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive), the threshold Pth (mW) is given by Following:

$$P_{th}(mW) = \begin{cases} ERP_{20cm}(d/20cm)^x & d \leq 20cm \\ ERP_{20cm} & 20cm < d \leq 40cm \end{cases}$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20cm}\sqrt{f}} \right)$$

- a. f(GHz) is the RF channel transmit frequency in GHz
- b. d is the separation distance (cm), The result is rounded to one decimal place for comparison
- c. ERP_{20cm} are determined by:

$$ERP_{20cm}(mW) = f(x) = \begin{cases} 2040f & 0.3GHz \leq f < 1.5GHz \\ 3060 & 1.5GHz \leq f \leq 6GHz \end{cases}$$

5. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
6. Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
 - a. When KDB Publication 447498 D04 SAR test exclusion applies to the OFDM configuration.
 - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
7. Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
 - a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
 - b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

10 TEST RESULT

1. The reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WIFI signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".
 - c. For WIFI/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.
3. Per KDB 447498 D04, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
4. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg

10.1Bluetooth

Mode	Antenna Manufact urer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
Body																
DH5	Amphenol	Aux.	Laptop	Bottom Side	0	39	2441	-0.05	0.013	11.98	12.50	1.127	77.30	1.294	0.019	/
	INPAQ	Aux.	Laptop	Bottom Side	0	39	2441	0.16	0.009	11.98	12.50	1.127	77.30	1.294	0.013	/
	Speed	Aux.	Laptop	Bottom Side	0	39	2441	0.05	0.015	11.98	12.50	1.127	77.30	1.294	0.022	/
	Amphenol	Aux.	Laptop	Front Edge	0	78	2480	0.03	0.027	11.37	12.50	1.297	77.30	1.294	0.045	/
	Amphenol	Aux.	Laptop	Front Edge	0	0	2402	-0.11	0.028	11.88	12.50	1.153	77.30	1.294	0.042	/
	Amphenol	Aux.	Laptop	Front Edge	0	39	2441	0.05	0.035	11.98	12.50	1.127	77.30	1.294	0.051	1#
	INPAQ	Aux.	Laptop	Front Edge	0	39	2441	0.08	0.025	11.98	12.50	1.127	77.30	1.294	0.036	/
	Speed	Aux.	Laptop	Front Edge	0	39	2441	-0.16	0.022	11.98	12.50	1.127	77.30	1.294	0.032	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

Mode	Antenna Manufact urer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	10g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	10g Scaled SAR (W/kg)	Meas. No.
Limbs																
DH5	Amphenol	Aux.	Laptop	Keyboard Side	0	78	2480	-0.01	0.182	11.37	12.50	1.297	77.30	1.294	0.305	/
	Amphenol	Aux.	Laptop	Keyboard Side	0	0	2402	0.00	0.196	11.88	12.50	1.153	77.30	1.294	0.292	/
	Amphenol	Aux.	Laptop	Keyboard Side	0	39	2441	0.00	0.233	11.98	12.50	1.127	77.30	1.294	0.340	12#
	INPAQ	Aux.	Laptop	Keyboard Side	0	39	2441	-0.05	0.201	11.98	12.50	1.127	77.30	1.294	0.293	/
	Speed	Aux.	Laptop	Keyboard Side	0	39	2441	0.15	0.201	11.98	12.50	1.127	77.30	1.294	0.293	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

10.1WIFI 2.4GHz

Mode	Antenna Manufact urer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
Body																
802.11b	Amphenol	Aux.	Laptop	Bottom Side	0	11	2462	0.03	0.356	19.61	20.00	1.094	96.55	1.036	0.403	/
	Amphenol	Main	Laptop	Bottom Side	0	6	2437	0.06	0.131	19.76	20.00	1.057	96.55	1.036	0.143	/
	INPAQ	Aux.	Laptop	Bottom Side	0	11	2462	0.16	0.262	19.61	20.00	1.094	96.55	1.036	0.297	/
	INPAQ	Main	Laptop	Bottom Side	0	6	2437	0.11	0.182	19.76	20.00	1.057	96.55	1.036	0.199	/
	Speed	Aux.	Laptop	Bottom Side	0	11	2462	-0.06	0.352	19.61	20.00	1.094	96.55	1.036	0.399	/
	Speed	Main	Laptop	Bottom Side	0	6	2437	0.00	0.144	19.76	20.00	1.057	96.55	1.036	0.158	/
	Amphenol	Aux.	Laptop	Front Edge	0	6	2437	-0.07	0.523	19.58	20.00	1.102	96.55	1.036	0.597	2#
	Amphenol	Aux.	Laptop	Front Edge	0	1	2412	0.03	0.501	19.46	20.00	1.132	96.55	1.036	0.588	/
	Amphenol	Aux.	Laptop	Front Edge	0	11	2462	-0.18	0.496	19.61	20.00	1.094	96.55	1.036	0.562	/
	Amphenol	Main	Laptop	Front Edge	0	6	2437	-0.05	0.475	19.76	20.00	1.057	96.55	1.036	0.520	/
	Amphenol	Main	Laptop	Front Edge	0	1	2412	0.04	0.479	19.39	20.00	1.151	96.55	1.036	0.571	/
	Amphenol	Main	Laptop	Front Edge	0	11	2462	0.00	0.518	19.71	20.00	1.069	96.55	1.036	0.574	3#
	INPAQ	Aux.	Laptop	Front Edge	0	11	2462	-0.18	0.488	19.61	20.00	1.094	96.55	1.036	0.553	/
	INPAQ	Main	Laptop	Front Edge	0	6	2437	-0.11	0.442	19.76	20.00	1.057	96.55	1.036	0.484	/
	Speed	Aux.	Laptop	Front Edge	0	11	2462	0.14	0.466	19.61	20.00	1.094	96.55	1.036	0.528	/
	Speed	Main	Laptop	Front Edge	0	6	2437	0.12	0.465	19.76	20.00	1.057	96.55	1.036	0.509	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

Mode	Antenna Manufact urer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	10g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	10g Scaled SAR (W/kg)	Meas. No.
Limbs																
802.11b	Amphenol	Aux.	Laptop	Keyboard Side	0	6	2437	-0.03	0.592	19.58	20.00	1.102	96.55	1.036	0.676	/
	Amphenol	Aux.	Laptop	Keyboard Side	0	1	2412	-0.12	0.582	19.46	20.00	1.132	96.55	1.036	0.683	/
	Amphenol	Aux.	Laptop	Keyboard Side	0	11	2462	-0.03	0.614	19.61	20.00	1.094	96.55	1.036	0.696	13#
	Amphenol	Main	Laptop	Keyboard Side	0	6	2437	0.15	0.499	19.76	20.00	1.057	96.55	1.036	0.546	/
	Amphenol	Main	Laptop	Keyboard Side	0	1	2412	-0.15	0.512	19.39	20.00	1.151	96.55	1.036	0.611	/
	Amphenol	Main	Laptop	Keyboard Side	0	11	2462	0.04	0.569	19.71	20.00	1.069	96.55	1.036	0.630	14#
	INPAQ	Aux.	Laptop	Keyboard Side	0	11	2462	0.13	0.512	19.61	20.00	1.094	96.55	1.036	0.580	/
	INPAQ	Main	Laptop	Keyboard Side	0	6	2437	0.01	0.522	19.76	20.00	1.057	96.55	1.036	0.572	/
	Speed	Aux.	Laptop	Keyboard Side	0	11	2462	0.04	0.562	19.61	20.00	1.094	96.55	1.036	0.637	/
	Speed	Main	Laptop	Keyboard Side	0	6	2437	0.19	0.449	19.76	20.00	1.057	96.55	1.036	0.492	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

10.2WIFI 5GHz

Fre. Band	Mode	Antenna Manufacturer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
Body																	
5.3G	802.11 ac80	Amphenol	Aux.	Laptop	Bottom Side	0	58	5290	0.18	0.152	13.90	14.00	1.023	97.33	1.027	0.160	/
		Amphenol	Main	Laptop	Bottom Side	0	58	5290	-0.17	0.201	13.87	14.00	1.030	97.33	1.027	0.213	/
		INPAQ	Aux.	Laptop	Bottom Side	0	58	5290	0.05	0.146	13.90	14.00	1.023	97.33	1.027	0.153	/
		INPAQ	Main	Laptop	Bottom Side	0	58	5290	-0.13	0.196	13.87	14.00	1.030	97.33	1.027	0.207	/
		Speed	Aux.	Laptop	Bottom Side	0	58	5290	-0.11	0.144	13.90	14.00	1.023	97.33	1.027	0.151	/
		Speed	Main	Laptop	Bottom Side	0	58	5290	0.02	0.188	13.87	14.00	1.030	97.33	1.027	0.199	/
		Amphenol	Aux.	Laptop	Front Edge	0	58	5290	0.04	0.574	13.90	14.00	1.023	97.33	1.027	0.603	/
		Amphenol	Main	Laptop	Front Edge	0	58	5290	0.15	0.774	13.87	14.00	1.030	97.33	1.027	0.819	/
		INPAQ	Aux.	Laptop	Front Edge	0	58	5290	0.01	0.586	13.90	14.00	1.023	97.33	1.027	0.616	/
		INPAQ	Main	Laptop	Front Edge	0	58	5290	-0.13	0.796	13.87	14.00	1.030	97.33	1.027	0.842	/
		Speed	Aux.	Laptop	Front Edge	0	58	5290	-0.07	0.643	13.90	14.00	1.023	97.33	1.027	0.676	4#
		Speed	Main	Laptop	Front Edge	0	58	5290	-0.17	0.842	13.87	14.00	1.030	97.33	1.027	0.891	5#
5.6G	802.11 ac80	Amphenol	Aux.	Laptop	Bottom Side	0	138	5690	-0.04	0.131	13.81	14.00	1.045	97.33	1.027	0.141	/
		Amphenol	Main	Laptop	Bottom Side	0	138	5690	0.12	0.212	13.88	14.00	1.028	97.33	1.027	0.224	/
		INPAQ	Aux.	Laptop	Bottom Side	0	138	5690	-0.07	0.132	13.81	14.00	1.045	97.33	1.027	0.142	/
		INPAQ	Main	Laptop	Bottom Side	0	138	5690	-0.11	0.142	13.88	14.00	1.028	97.33	1.027	0.150	/
		Speed	Aux.	Laptop	Bottom Side	0	138	5690	0.12	0.152	13.81	14.00	1.045	97.33	1.027	0.163	/
		Speed	Main	Laptop	Bottom Side	0	138	5690	-0.13	0.146	13.88	14.00	1.028	97.33	1.027	0.154	/
		Amphenol	Aux.	Laptop	Front Edge	0	138	5690	0.15	0.749	13.81	14.00	1.045	97.33	1.027	0.804	6#
		Amphenol	Aux.	Laptop	Front Edge	0	122	5610	0.02	0.656	13.51	14.00	1.119	97.33	1.027	0.754	/
		Amphenol	Aux.	Laptop	Front Edge	0	106	5530	0.15	0.643	13.59	14.00	1.099	97.33	1.027	0.726	/
		Amphenol	Main	Laptop	Front Edge	0	138	5690	-0.05	0.716	13.88	14.00	1.028	97.33	1.027	0.756	7#
		Amphenol	Main	Laptop	Front Edge	0	122	5610	0.11	0.634	13.53	14.00	1.114	97.33	1.027	0.725	/
		Amphenol	Main	Laptop	Front Edge	0	106	5530	0.14	0.672	13.87	14.00	1.030	97.33	1.027	0.711	/
		INPAQ	Aux.	Laptop	Front Edge	0	138	5690	0.05	0.668	13.81	14.00	1.045	97.33	1.027	0.717	/
		INPAQ	Main	Laptop	Front Edge	0	138	5690	-0.14	0.662	13.88	14.00	1.028	97.33	1.027	0.699	/
		Speed	Aux.	Laptop	Front Edge	0	138	5690	-0.13	0.661	13.81	14.00	1.045	97.33	1.027	0.709	/
		Speed	Main	Laptop	Front Edge	0	138	5690	-0.05	0.546	13.88	14.00	1.028	97.33	1.027	0.576	/
5.8G	802.11 ac80	Amphenol	Aux.	Laptop	Bottom Side	0	155	5775	-0.12	0.201	13.58	14.00	1.102	97.33	1.027	0.227	/
		Amphenol	Main	Laptop	Bottom Side	0	155	5775	-0.15	0.262	13.63	14.00	1.089	97.33	1.027	0.293	/
		INPAQ	Aux.	Laptop	Bottom Side	0	155	5775	-0.14	0.211	13.58	14.00	1.102	97.33	1.027	0.239	/
		INPAQ	Main	Laptop	Bottom Side	0	155	5775	0.03	0.301	13.63	14.00	1.089	97.33	1.027	0.337	/
		Speed	Aux.	Laptop	Bottom Side	0	155	5775	-0.17	0.263	13.58	14.00	1.102	97.33	1.027	0.298	/

		Speed	Main	Laptop	Bottom Side	0	155	5775	0.04	0.354	13.63	14.00	1.089	97.33	1.027	0.396	/
		Amphenol	Aux.	Laptop	Front Edge	0	155	5775	0.04	0.749	13.58	14.00	1.102	97.33	1.027	0.848	/
		Amphenol	Main	Laptop	Front Edge	0	155	5775	-0.15	0.801	13.63	14.00	1.089	97.33	1.027	0.896	/
		INPAQ	Aux.	Laptop	Front Edge	0	155	5775	0.03	0.812	13.58	14.00	1.102	97.33	1.027	0.919	/
		INPAQ	Main	Laptop	Front Edge	0	155	5775	0.17	0.885	13.63	14.00	1.089	97.33	1.027	0.990	/
		Speed	Aux.	Laptop	Front Edge	0	155	5775	-0.05	0.959	13.58	14.00	1.102	97.33	1.027	1.085	8#
		Speed	Main	Laptop	Front Edge	0	155	5775	0.11	0.927	13.63	14.00	1.089	97.33	1.027	1.037	9#
5.9G	802.11 ac80	Amphenol	Aux.	Laptop	Bottom Side	0	171	5855	-0.05	0.052	13.79	14.000	1.050	97.33	1.027	0.056	/
		Amphenol	Main	Laptop	Bottom Side	0	171	5855	0.11	0.045	13.80	14.000	1.047	97.33	1.027	0.048	/
		INPAQ	Aux.	Laptop	Bottom Side	0	171	5855	-0.02	0.049	13.79	14.000	1.050	97.33	1.027	0.053	/
		INPAQ	Main	Laptop	Bottom Side	0	171	5855	-0.17	0.053	13.80	14.000	1.047	97.33	1.027	0.057	/
		Speed	Aux.	Laptop	Bottom Side	0	171	5855	-0.18	0.044	13.79	14.000	1.050	97.33	1.027	0.047	/
		Speed	Main	Laptop	Bottom Side	0	171	5855	-0.14	0.046	13.80	14.000	1.047	97.33	1.027	0.049	/
		Amphenol	Aux.	Laptop	Front Edge	0	171	5855	0.07	0.389	13.79	14.000	1.050	97.33	1.027	0.419	/
		Amphenol	Main	Laptop	Front Edge	0	171	5855	0.00	0.286	13.80	14.000	1.047	97.33	1.027	0.308	/
		INPAQ	Aux.	Laptop	Front Edge	0	171	5855	-0.13	0.420	13.79	14.000	1.050	97.33	1.027	0.453	10#
		INPAQ	Main	Laptop	Front Edge	0	171	5855	0.01	0.315	13.80	14.000	1.047	97.33	1.027	0.339	11#
		Speed	Aux.	Laptop	Front Edge	0	171	5855	0.10	0.401	13.79	14.000	1.050	97.33	1.027	0.432	/
		Speed	Main	Laptop	Front Edge	0	171	5855	-0.12	0.262	13.80	14.000	1.047	97.33	1.027	0.282	/

Note: Refer to ANNEX C for the detailed test data for each test configuration.

Fre. Band	Mode	Antenna Manufacturer	Antenna	Test State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	10g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	10g Scaled SAR (W/kg)	Meas. No.
Limbs																	
5.3G	802.11 ac80	Amphenol	Aux.	Laptop	Keyboard Side	0	58	5290	-0.08	0.284	13.90	14.00	1.023	97.33	1.027	0.298	15#
		Amphenol	Main	Laptop	Keyboard Side	0	58	5290	0.03	0.514	13.87	14.00	1.030	97.33	1.027	0.544	16#
		INPAQ	Aux.	Laptop	Keyboard Side	0	58	5290	0.19	0.201	13.90	14.00	1.023	97.33	1.027	0.211	/
		INPAQ	Main	Laptop	Keyboard Side	0	58	5290	-0.04	0.448	13.87	14.00	1.030	97.33	1.027	0.474	/
		Speed	Aux.	Laptop	Keyboard Side	0	58	5290	-0.10	0.199	13.90	14.00	1.023	97.33	1.027	0.209	/
		Speed	Main	Laptop	Keyboard Side	0	58	5290	-0.18	0.486	13.87	14.00	1.030	97.33	1.027	0.514	/
5.6G	802.11 ac80	Amphenol	Aux.	Laptop	Keyboard Side	0	138	5690	0.06	0.451	13.81	14.00	1.045	97.33	1.027	0.484	17#
		Amphenol	Aux.	Laptop	Keyboard Side	0	106	5530	-0.18	0.386	13.59	14.00	1.099	97.33	1.027	0.436	/
		Amphenol	Aux.	Laptop	Keyboard Side	0	122	5610	0.03	0.372	13.51	14.00	1.119	97.33	1.027	0.428	/
		Amphenol	Main	Laptop	Keyboard Side	0	138	5690	-0.02	0.382	13.88	14.00	1.028	97.33	1.027	0.403	18#
		Amphenol	Main	Laptop	Keyboard Side	0	106	5530	0.15	0.312	13.87	14.00	1.030	97.33	1.027	0.330	/
		Amphenol	Main	Laptop	Keyboard Side	0	122	5610	-0.05	0.301	13.53	14.00	1.114	97.33	1.027	0.344	/
		INPAQ	Aux.	Laptop	Keyboard Side	0	138	5690	-0.14	0.362	13.81	14.00	1.045	97.33	1.027	0.389	/
		INPAQ	Main	Laptop	Keyboard Side	0	138	5690	0.11	0.316	13.88	14.00	1.028	97.33	1.027	0.334	/
		Speed	Aux.	Laptop	Keyboard Side	0	138	5690	-0.11	0.396	13.81	14.00	1.045	97.33	1.027	0.425	/
		Speed	Main	Laptop	Keyboard Side	0	138	5690	0.04	0.308	13.88	14.00	1.028	97.33	1.027	0.325	/
5.8G	802.11 ac80	Amphenol	Aux.	Laptop	Keyboard Side	0	155	5775	-0.02	0.450	13.58	14.00	1.102	97.33	1.027	0.509	19#
		Amphenol	Main	Laptop	Keyboard Side	0	155	5775	-0.09	0.282	13.63	14.00	1.089	97.33	1.027	0.315	20#
		INPAQ	Aux.	Laptop	Keyboard Side	0	155	5775	-0.10	0.396	13.58	14.00	1.102	97.33	1.027	0.448	/
		INPAQ	Main	Laptop	Keyboard Side	0	155	5775	0.05	0.213	13.63	14.00	1.089	97.33	1.027	0.238	/
		Speed	Aux.	Laptop	Keyboard Side	0	155	5775	0.10	0.301	13.58	14.00	1.102	97.33	1.027	0.341	/
		Speed	Main	Laptop	Keyboard Side	0	155	5775	-0.03	0.188	13.63	14.00	1.089	97.33	1.027	0.210	/
5.9G	802.11 ac80	Amphenol	Aux.	Laptop	Keyboard Side	0	171	5855	-0.15	0.262	13.79	14.000	1.050	97.33	1.027	0.283	/
		Amphenol	Main	Laptop	Keyboard Side	0	171	5855	-0.15	0.190	13.80	14.000	1.047	97.33	1.027	0.204	/
		INPAQ	Aux.	Laptop	Keyboard Side	0	171	5855	-0.01	0.299	13.79	14.000	1.050	97.33	1.027	0.322	21#
		INPAQ	Main	Laptop	Keyboard Side	0	171	5855	-0.13	0.204	13.80	14.000	1.047	97.33	1.027	0.219	22#
		Speed	Aux.	Laptop	Keyboard Side	0	171	5855	-0.19	0.231	13.79	14.000	1.050	97.33	1.027	0.249	/
		Speed	Main	Laptop	Keyboard Side	0	171	5855	-0.05	0.186	13.80	14.000	1.047	97.33	1.027	0.200	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																	

11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Frequency Band (MHz)	Wireless Band	Antenna manufacturer	Test Mode	Antenna	RF Exposure Conditions	Test Position	Highest Measured SAR (W/kg)	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Largest to Smallest SAR Ratio
5290	802.11ac80	Speed	Laptop	Main	Body	Front Edge	0.842	Yes	0.817	1.03
5775	802.11ac80	Amphenol	Laptop	Main	Body	Front Edge	0.801	Yes	0.785	1.02
5775	802.11ac80	INPAQ	Laptop	Aux.	Body	Front Edge	0.812	Yes	0.798	1.02
5775	802.11ac80	INPAQ	Laptop	Main	Body	Front Edge	0.885	Yes	0.853	1.04
5775	802.11ac80	Speed	Laptop	Aux.	Body	Front Edge	0.959	Yes	0.937	1.02
5775	802.11ac80	Speed	Laptop	Main	Body	Front Edge	0.927	Yes	0.902	1.03

Note: The ratio of largest to smallest SAR for the original and first repeated measurements is < 1.20 , the second repeated measurement is not required.

12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

According KDB 447498 D04, simultaneous transmission:

- a) $SPLSR = (SAR1 + SAR2)^{1.5} / R_i$ (min. separation distance, mm), and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
SAR1 is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.
SAR2 is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition as the first.
- b) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
- c) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

12.1 Simultaneous Transmission Mode Considerations

No.	Simultaneous Tx Combination	Body&Limbs
1	Bluetooth + WLAN 2.4GHz (Antenna Main)	Yes
2	WLAN 2.4GHz (Antenna Auxiliary) + WLAN 2.4GHz (Antenna Main)	Yes
3	Bluetooth + WLAN 5GHz (Antenna Auxiliary)	Yes
4	Bluetooth + WLAN 5GHz (Antenna Main)	Yes
5	WLAN 5GHz (Antenna Auxiliary) + WLAN 5GHz (Antenna Main)	Yes
6	Bluetooth + WLAN 5GHz (Antenna Auxiliary) + WLAN 5GHz (Antenna Main)	Yes

Note:


1. The EUT supports the Antenna Auxiliary with TX/RX diversity function for WLAN and Bluetooth, the Antenna Main with TX/RX diversity function for WLAN.
2. WLAN 2.4GHz and Bluetooth will not be transmitting from the Antenna Auxiliary at same time.


12.2Body Simultaneous Transmission SAR Evaluation

State	Position	Stand alone SAR					SUM SAR						SPLSR SAR	
		1	2	3	4	5								
		Bluetooth	WLAN 2.4GHz (Antenna Auxiliary)	WLAN 2.4GHz (Antenna Main)	MAX. WLAN 5GHz (Antenna Auxiliary)	MAX. WLAN 5GHz (Antenna Main)	Sum SAR (1+3)	Sum SAR (1+4)	Sum SAR (1+5)	Sum SAR (2+3)	Sum SAR (4+5)	Sum SAR (1+4+5)	Sum SAR (4+5)	Sum SAR (1+4+5)
Laptop	Bottom Side	0.022	0.403	0.199	0.298	0.396	0.221	0.320	0.418	0.602	0.694	0.716	/	/
Laptop	Front Side	0.051	0.597	0.574	1.085	1.037	0.625	1.136	1.088	1.171	2.122	2.173	0.01 ^{1#}	0.01 ^{2#}
Note:														
1: The highest Summed 1g SAR is 2.173 W/Kg > 1.6 W/kg, so Simultaneous Transmission SAR test exclusion is determined by the SAR to peak location separation ratio.														
2: The SPLSR is 0.01 < 0.04, so Simultaneous Transmission SAR test is not required.														

12.3Limbs Simultaneous Transmission SAR Evaluation

State	Position	Stand alone SAR					SUM SAR					
		1	2	3	4	5						
		Bluetooth	WLAN 2.4GHz (Antenna Auxiliary)	WLAN 2.4GHz (Antenna Main)	MAX. WLAN 5GHz (Antenna Auxiliary)	MAX. WLAN 5GHz (Antenna Main)	Sum SAR (1+3)	Sum SAR (1+4)	Sum SAR (1+5)	Sum SAR (2+3)	Sum SAR (4+5)	Sum SAR (1+4+5)
Laptop	Keyboard Side	0.340	0.696	0.630	0.509	0.544	0.970	0.849	0.884	1.326	1.053	1.393
Laptop	Right Edge	0.000	0.000	0.024	0.000	0.067	0.024	0.000	0.067	0.024	0.067	0.067
Note:												
1: The highest Summed 10g SAR is 1.393 W/Kg < 4.0 W/kg, so Simultaneous Transmission SAR test is not required.												

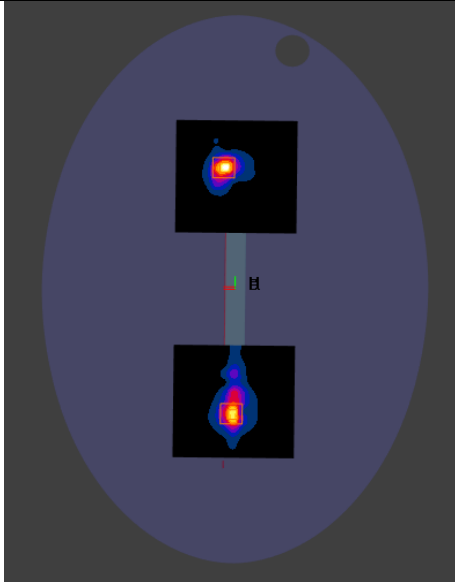Case 1#	Band	Position	SAR (W/kg)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Plot No				X	Y	Z				
1	WIFI5G Aux.Ant	Front Edge	1.085	-0.011002	0.129984	-0.175595	263.2	2.12	0.01	Not required
2	WIFI5G Main.Ant		1.037	-0.001005	-0.132983	-0.175574				
										

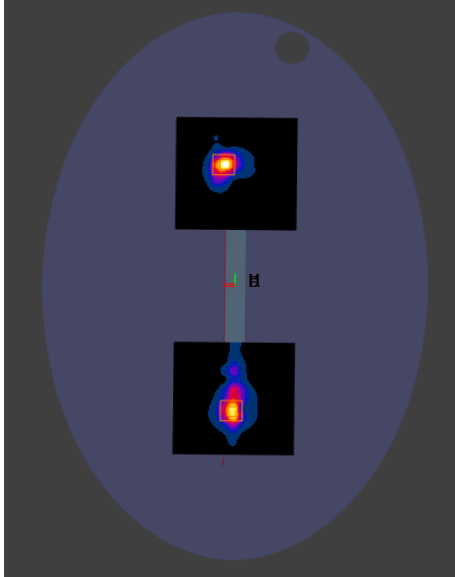Case 2#	Band	Position	SAR (W/kg)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Plot No				X	Y	Z				
1	BT+WIFI5G Aux.Ant	Front Edge	1.136	-0.011002	0.129984	-0.175595	263.2	2.17	0.01	Not required
2	WIFI5G Main.Ant		1.037	-0.001005	-0.132983	-0.175574				
										

13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test Software	Speag	DASY8	16.2.2.1588	N/A	N/A
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2024/05/07	2027/05/06
5GHz Validation Dipole	Speag	D5GHzV2	SN: 1200	2024/05/09	2027/05/08
Data Acquisition Electronicsr	Speag	DAE4	SN: 878	2025/03/05	2026/03/04
E-Field Probe	Speag	EX3DV4	SN: 7893	2024/09/05	2025/09/04
Signal Generator	Keysight	N5173B	MY62150163	2024/08/12	2025/08/11
Power Meter	R&S	NRVD-B2	835843/014	2024/08/08	2025/08/07
Power Sensor	R&S	NRV-Z4	100381	2024/08/08	2025/08/07
Power Sensor	R&S	NRV-Z2	100211	2024/08/08	2025/08/07
Network Analyzer	Agilent	E5071C	MY46103472	2024/09/11	2025/09/10
Thermometer	Elitech	RC-4HC	EF7216002985	2024/10/31	2025/10/30
Thermometer	Elitech	RC-4HC	EF720B004811	2024/10/31	2025/10/30
Power Amplifier	Mini-Circuits	ZVA-183W-S+	932502132	N/A	N/A
Dielectric Probe Kit	Speag	DAK3.5	SN: 1312	N/A	N/A
Phantom	Speag	ELI V8.0	SN: 2159	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using a DAK3.5 Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2025.03.18	Head	2450	21.4	1.80	39.59	1.80	39.20	0.00	0.99
2025.03.19	Head	5250	21.7	4.70	35.68	4.71	35.93	-0.21	-0.70
2025.03.21	Head	5600	21.4	5.05	35.15	5.07	35.53	-0.39	-1.07
2025.03.25	Head	5750	21.5	5.18	35.63	5.22	35.36	-0.77	0.76
Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$.									

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %.

Head liquid 1g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2025.03.18	Head	2450	100	5.320	53.20	52.60	1.14
2025.03.19	Head	5250	100	7.630	76.30	77.70	-1.80
2025.03.21	Head	5600	100	8.110	81.10	81.30	-0.25
2025.03.25	Head	5750	100	7.860	78.60	77.60	1.29

Note: The tolerance limit of System validation $\pm 10\%$.

Head liquid 10g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2025.03.18	Head	2450	100	2.550	25.50	24.70	3.24
2025.03.19	Head	5250	100	2.220	22.20	22.00	0.91
2025.03.21	Head	5600	100	2.320	23.20	23.10	0.43
2025.03.25	Head	5750	100	2.250	22.50	21.90	2.74

Note: The tolerance limit of System validation $\pm 10\%$.

System Performance Check Data (2450MHz)


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		D245 0	CW, 0--	2450.0, 2450	6.98	1.80	39.6	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 18	2025-03-	EX3DV4 - SN7893, 2024-09- 05	DAE4 Sn878, 2025-03-05

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	96.0 x 96.0	30.0 x 30.0 x	Date	2025-03-18	2025-03-18
	[mm]		30.0	psSAR1g	5.24	5.32
Grid	Steps	12.0 x 12.0	5.0 x 5.0 x 5.0	[W/kg]		
	[mm]			psSAR10g	2.41	2.55
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	-0.01	0.04
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.5	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		VMS + 6p	VMS + 6p	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		54.1
				Dist 3dB Peak		8.4
				[mm]		

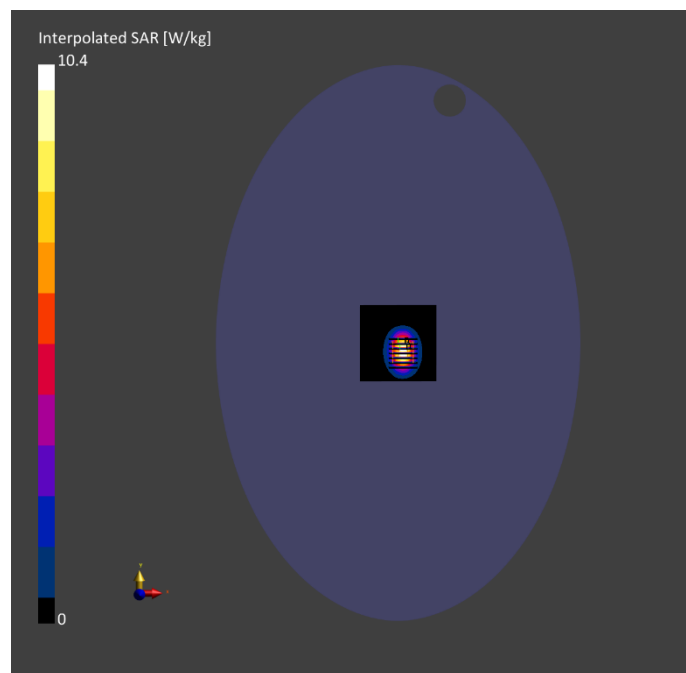

System Performance Check Data (5250MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		D5GH z	CW, 0--	5250.0, 5250	5.44	4.70	35.7	22.5	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -2159	HBBL-600-10000 2025-03-19	EX3DV4 - SN7893, 2024-09- 05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	All points	All points
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-19	2025-03-19
psSAR1g [W/kg]	7.44	7.63
psSAR10g [W/kg]	2.13	2.22
Power Drift [dB]	-0.08	0.07
Power Scaling	Disabled	Disabled
Scaling Factor		
[dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		59.6
Dist 3dB Peak [mm]		8.8

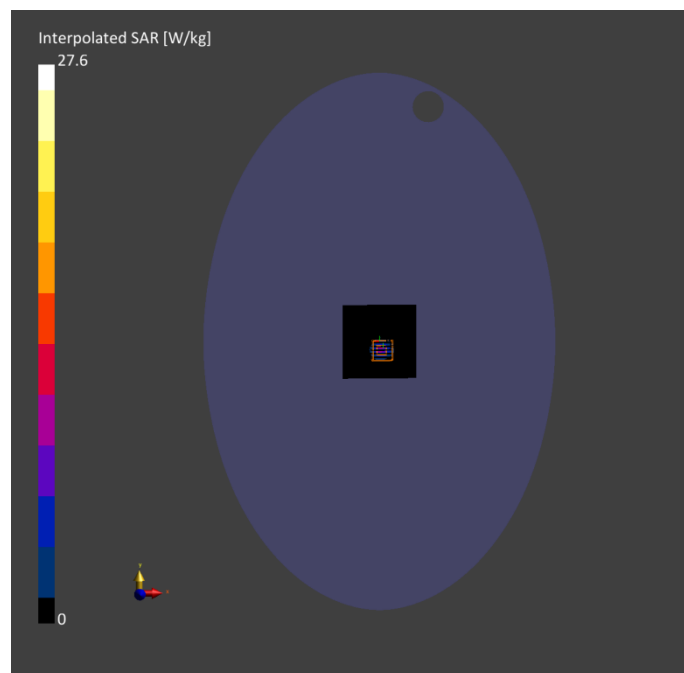

System Performance Check Data (5600MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		D5GH z	CW, 0--	5600.0, 60	4.91	5.05	35.1	22.5	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -2159	HBBL-600-10000 2025-03-21	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-21	2025-03-21
psSAR1g [W/kg]	7.43	8.11
psSAR10g [W/kg]	2.15	2.32
Power Drift [dB]	0.04	0.04
Power Scaling	Disabled	Disabled
Scaling Factor		
[dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		64.7
Dist 3dB Peak [mm]		7.8

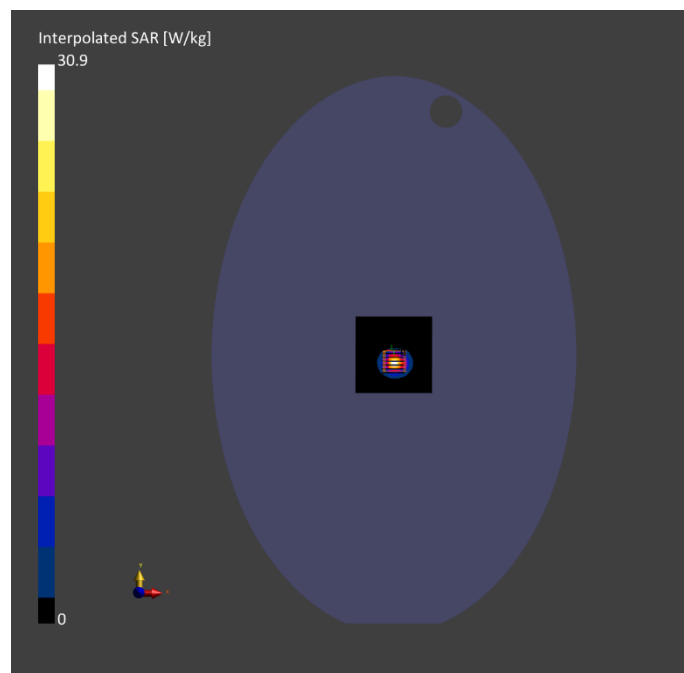

System Performance Check Data (5750MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL		D5GH z	CW, 0--	5750.0, 5750	4.98	5.18	35.6	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -2159	HBBL-600-10000 2025-03-25	EX3DV4 - SN7893, 2024-09- 05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	All points	All points
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-25	2025-03-25
psSAR1g [W/kg]	7.74	7.86
psSAR10g [W/kg]	2.11	2.25
Power Drift [dB]	-0.02	0.14
Power Scaling	Disabled	Disabled
Scaling Factor		
[dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		61.6
Dist 3dB Peak [mm]		8.1

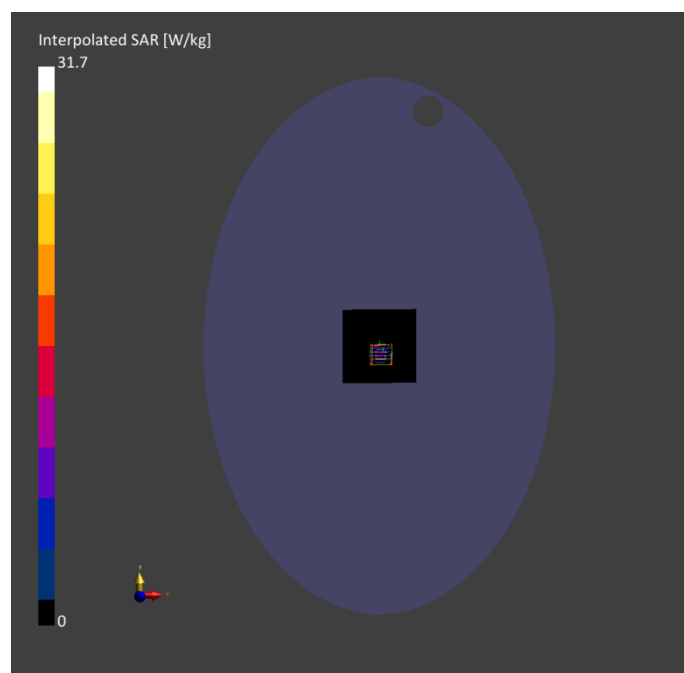

ANNEX C TEST DATA

Meas.1 Body Plane with Front Edge 0mm on 39 Channel in Bluetooth mode with Antenna Auxiliary


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032- CAA	2441.0, 39	6.98	1.78	39.7	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2025-03-18	EX3DV4 - SN7893,	2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	120.0 x 120.0	30.0 x 30.0 x	Date	2025-03-18	2025-03-18
	[mm]		30.0	psSAR1g	0.031	0.035
Grid	Steps	12.0 x 12.0	5.0 x 5.0 x 5.0	[W/kg]		
	[mm]			psSAR10g	0.014	0.011
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	0.02	0.05
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.5	Power Scaling	Disabled	Disabled
MAIA		Y	Y	Scaling Factor		
Surface		VMS + 6p	VMS + 6p	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		49.3
				Dist 3dB Peak		> 15.0
				[mm]		

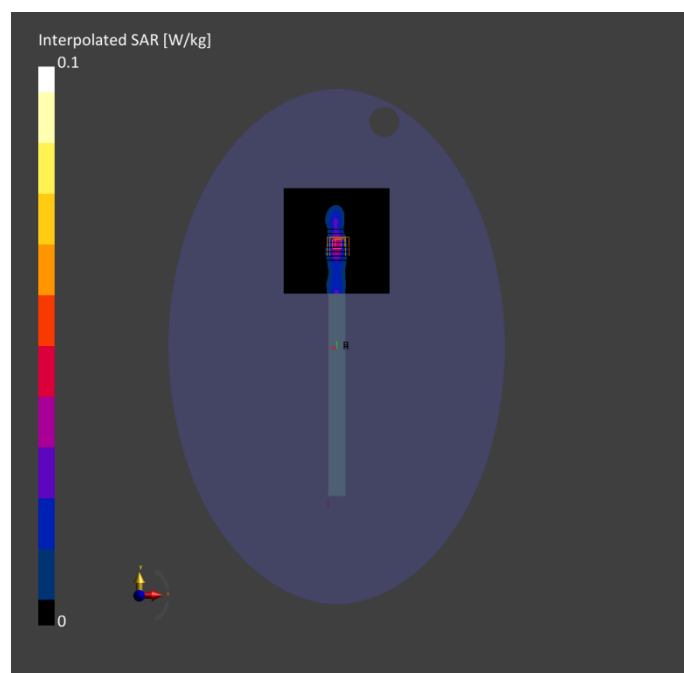

Meas.2 Body Plane with Front Edge 0mm on 6 Channel in IEEE802.11b mode with Antenna Auxiliary
Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	WLA N 2.4G Hz	WLAN, 10012- CAB	2437.0, 6	6.98	1.75	39.9	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-18	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup
Measurement Results

		Area Scan	Zoom Scan			Area Scan	Zoom Scan
Grid	Extents	120.0 x 120.0	30.0 x 30.0 x	Date		2025-03-18	2025-03-18
	[mm]		30.0	psSAR1g		0.450	0.523
Grid	Steps	12.0 x 12.0	5.0 x 5.0 x 5.0	[W/kg]			
	[mm]			psSAR10g		0.229	0.238
Sensor		3.0	1.4	[W/kg]			
Surface [mm]				Power Drift		-0.02	-0.07
Graded Grid		Yes	Yes	[dB]			
Grading Ratio		1.5	1.5	Power Scaling		Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor			
Surface		VMS + 6p	VMS + 6p	[dB]			
Detection				TSL		No correction	No correction
Scan Method		Measured	Measured	Correction			
				M2/M1 [%]			52.7
				Dist 3dB Peak			7.6
				[mm]			

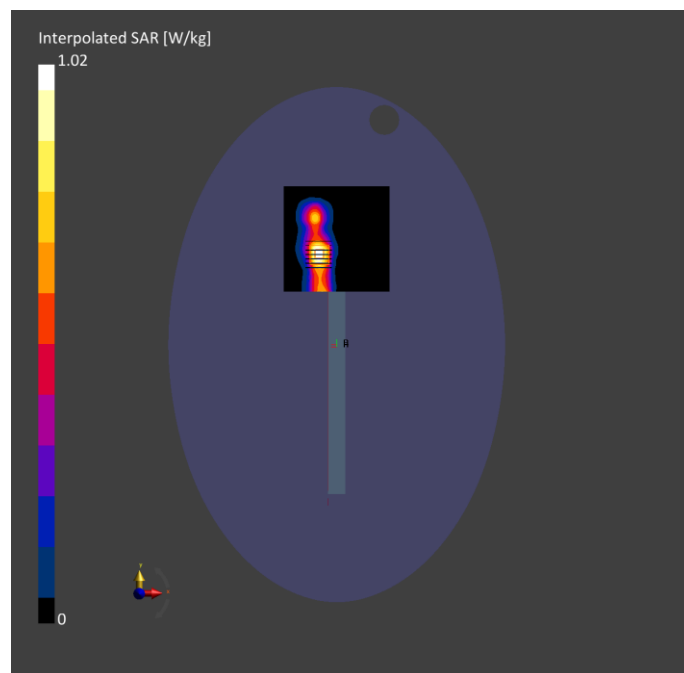

Meas.3 Body Plane with Front Edge 0mm on 11 Channel in IEEE802.11b mode with Antenna Main


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	WLA N 2.4G Hz	WLAN, 10012- CAB	2462.0, 11	6.98	1.84	39.5	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2025-03-18	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	120.0 x 120.0	30.0 x 30.0 x 30.0	Date	2025-03-18	2025-03-18
				psSAR1g	0.488	0.518
Grid	Steps	12.0 x 12.0	5.0 x 5.0 x 5.0	[W/kg]		
				psSAR10g	0.256	0.274
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	0.06	0.00
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.5	Power Scaling	Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor		
Surface		VMS + 6p	VMS + 6p	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		45.3
				Dist 3dB Peak		6.3
				[mm]		

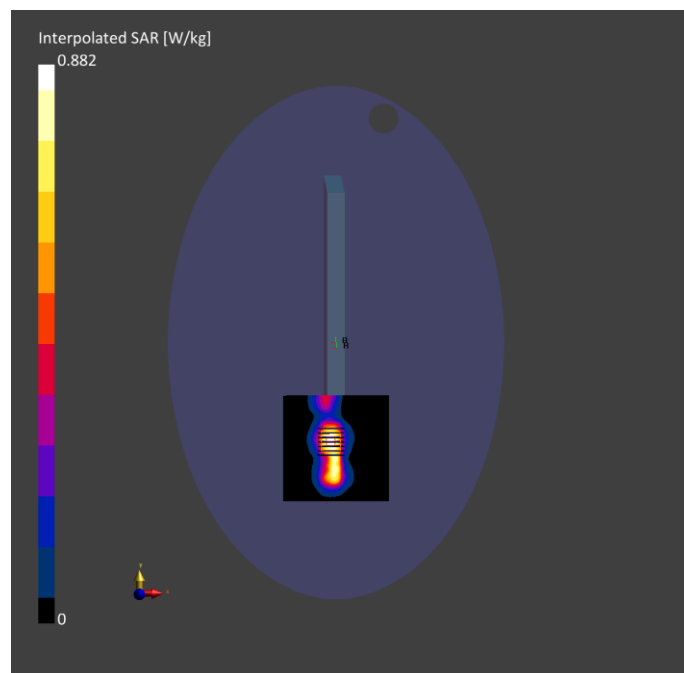

Meas.4 Body Plane with Front Edge 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5290.0, 58	5.44	4.79	35.2	22.5	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-19	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-19	2025-03-19
psSAR1g [W/kg]	0.614	0.643
psSAR10g [W/kg]	0.197	0.193
Power Drift [dB]	-0.01	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		52.7
Dist 3dB Peak [mm]		6.4

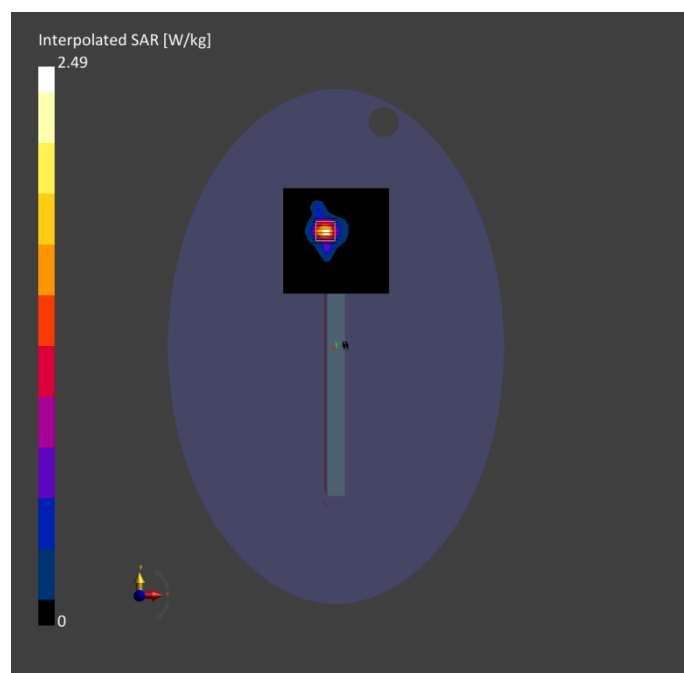

Meas.5 Body Plane with Front Edge 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5290.0, 58	5.44	4.79	35.2	22.5	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-19	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-19	2025-03-19
psSAR1g [W/kg]	0.745	0.842
psSAR10g [W/kg]	0.245	0.243
Power Drift [dB]	-0.08	-0.17
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		51.3
Dist 3dB Peak [mm]		6.4

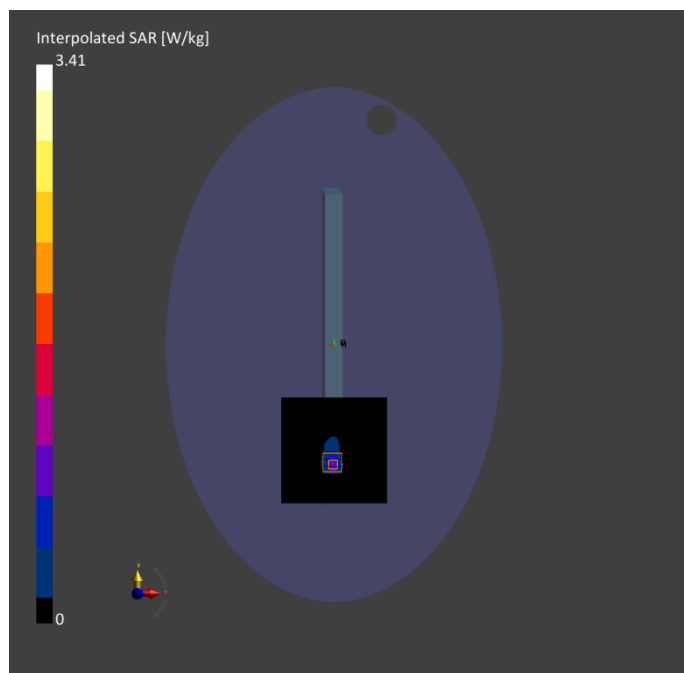

Meas.6 Body Plane with Front Edge 0mm on 138 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5690.0, 138	4.98	5.19	34.0	22.5	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-21	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-21	2025-03-21
psSAR1g [W/kg]	0.714	0.749
psSAR10g [W/kg]	0.227	0.226
Power Drift [dB]	-0.09	0.15
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		53.7
Dist 3dB Peak [mm]		6.9

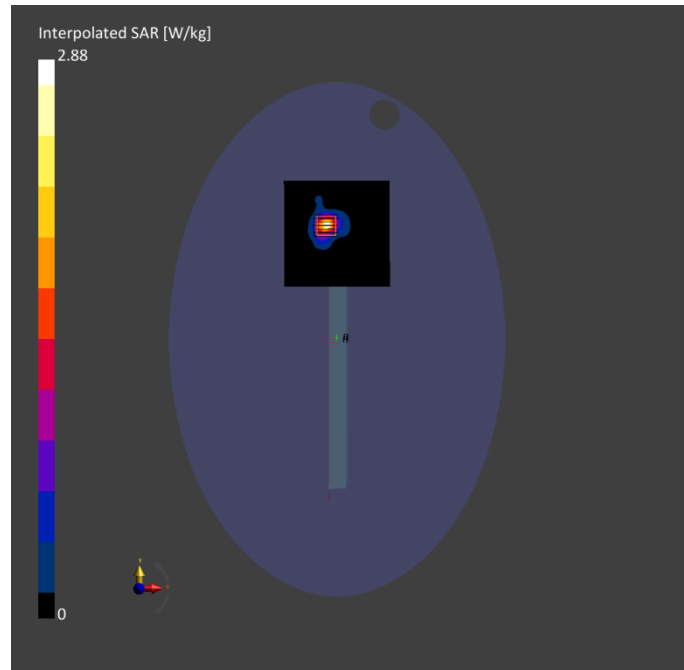

Meas.7 Body Plane with Front Edge 0mm on 138 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5690.0, 138	4.98	5.19	34.0	22.5	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-21	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-21	2025-03-21
psSAR1g [W/kg]	0.644	0.716
psSAR10g [W/kg]	0.234	0.233
Power Drift [dB]	0.09	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		54.9
Dist 3dB Peak [mm]		6.9

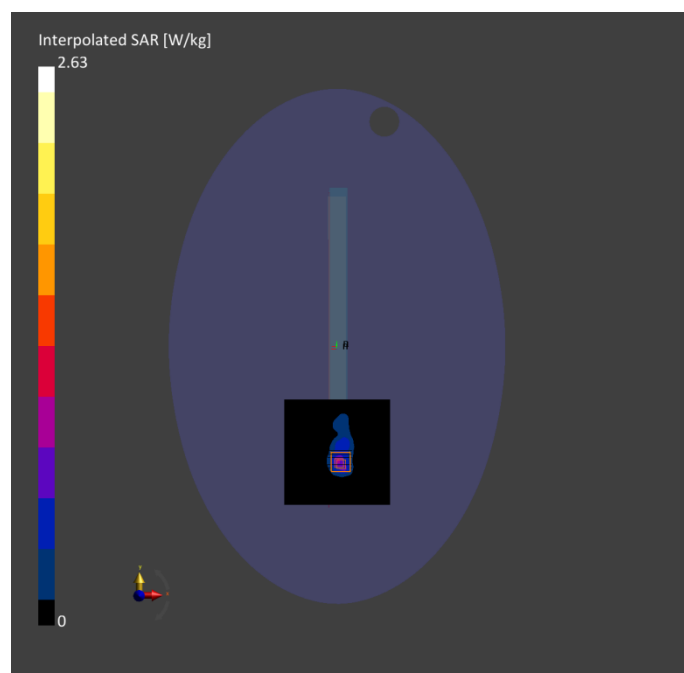

Meas.8 Body Plane with Front Edge 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5775.0, 155	4.98	5.23	35.3	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-25	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-25	2025-03-25
psSAR1g [W/kg]	0.956	0.959
psSAR10g [W/kg]	0.307	0.294
Power Drift [dB]	0.02	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		51.6
Dist 3dB Peak [mm]		6.9

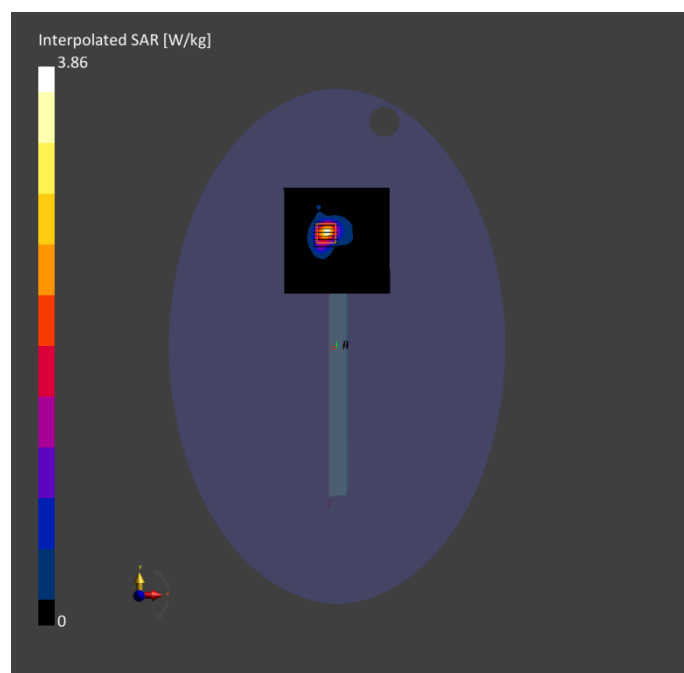

Meas.9 Body Plane with Front Edge 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5775.0, 155	4.98	5.23	35.3	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-25	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-25	2025-03-25
psSAR1g [W/kg]	0.832	0.927
psSAR10g [W/kg]	0.285	0.294
Power Drift [dB]	0.02	0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		52.5
Dist 3dB Peak [mm]		6.1

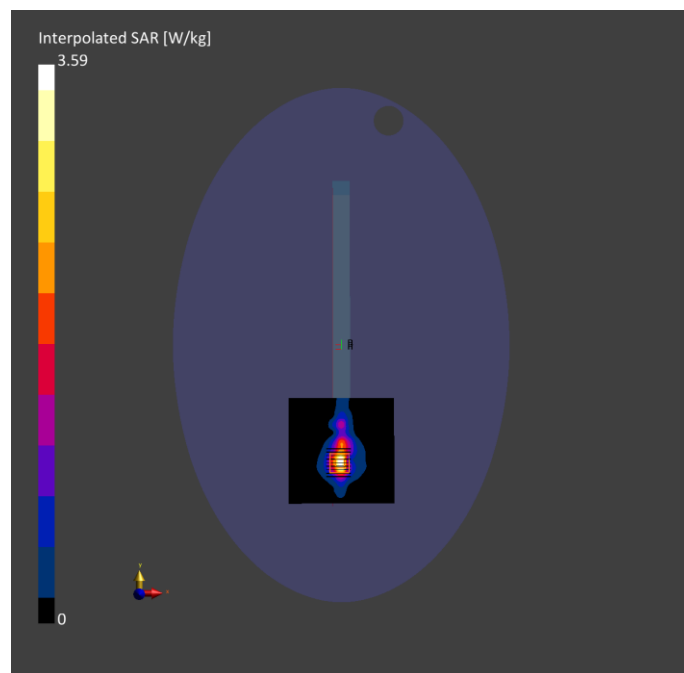

Meas.10 Body Plane with Front Edge 0mm on 171 Channel in IEEE802.11ac80 mode with Antenna Auxiliary


Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	Custo m Band	CW, 10544- AAD	5855.0, 5855000	4.98	5.39	35.0	22.6	21.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-25	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup				Measurement Results		
		Area Scan	Zoom Scan			
Grid	Extents	120.0 x 120.0	24.0 x 24.0 x	Date	2025-03-25	2025-03-25
			22.0	psSAR1g	0.473	0.420
Grid	Steps	10.0 x 10.0	4.0 x 4.0 x 2.0	[W/kg]		
				psSAR10g	0.145	0.110
Sensor		3.0	1.4	[W/kg]		
Surface [mm]				Power Drift	0.07	-0.13
Graded Grid		Yes	Yes	[dB]		
Grading Ratio		1.5	1.4	Power Scaling	Disabled	Disabled
MAIA		Y	Y	Scaling Factor		
Surface		VMS + 6p	VMS + 6p	[dB]		
Detection				TSL	No correction	No correction
Scan Method		Measured	Measured	Correction		
				M2/M1 [%]		48.3
				Dist 3dB Peak		5.8
				[mm]		

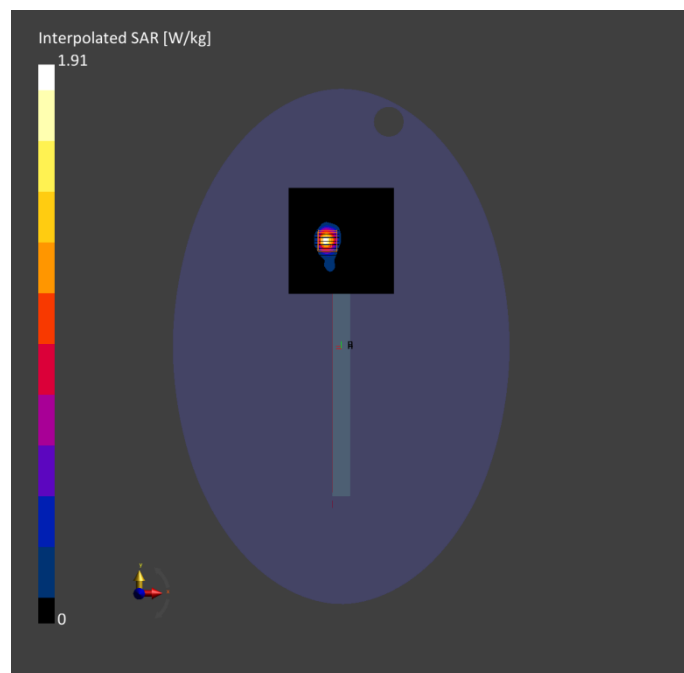

Meas.11 Body Plane with Front Edge 0mm on 171 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	EDGE LEFT, 0.00	Custo m Band	CW, 10544- AAD	5855.0, 5855000	4.98	5.39	35.0	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-25	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-25	2025-03-25
psSAR1g [W/kg]	0.270	0.315
psSAR10g [W/kg]	0.092	0.086
Power Drift [dB]	-0.05	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		47.0
Dist 3dB Peak [mm]		5.6

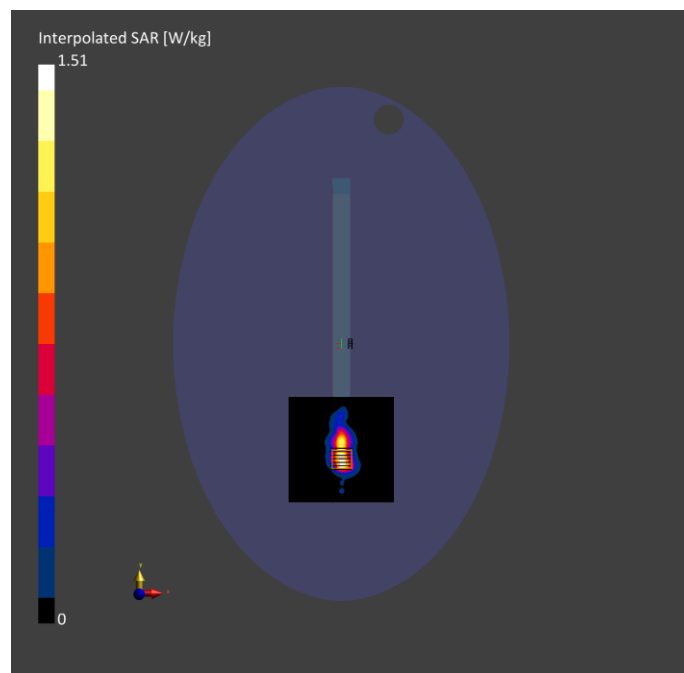

Meas.12 Limbs Plane with Keyboard Side 0mm on 39 Channel in Bluetooth mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032- CAA	2441.0, 39	6.98	1.78	39.7	22.3	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03- 18	EX3DV4 - SN7893, 2024-09- 05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-18	2025-03-18
psSAR1g [W/kg]	0.516	0.510
psSAR10g [W/kg]	0.243	0.233
Power Drift [dB]	0.00	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		48.4
Dist 3dB Peak [mm]		7.1

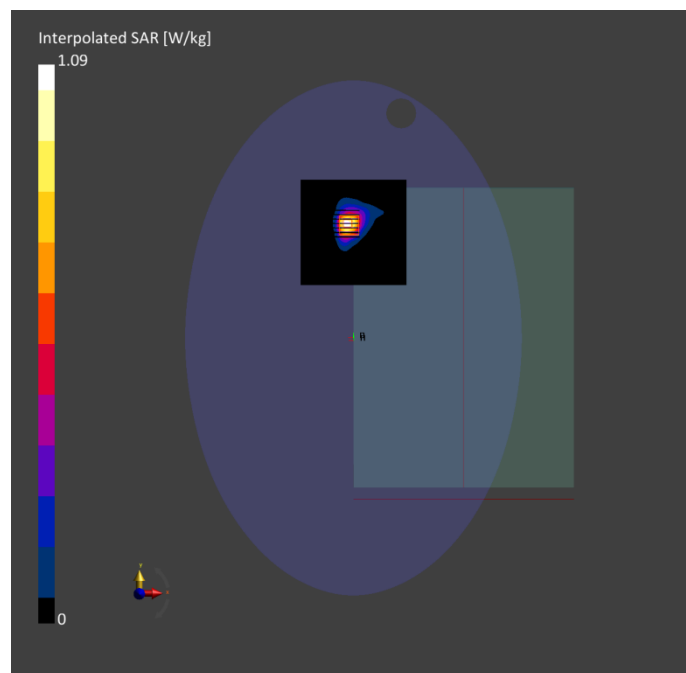

Meas.13 Limbs Plane with Keyboard Side 0mm on 11 Channel in IEEE802.11b mode with Antenna Auxiliary
Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	WLA N 2.4G Hz	WLAN, 10012- CAB	2462.0, 11	6.98	1.84	39.5	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-18	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup
Measurement Results

		Area Scan	Zoom Scan			Area Scan	Zoom Scan
Grid	Extents	120.0 x 120.0	30.0 x 30.0 x	Date		2025-03-18	2025-03-18
	[mm]		30.0	psSAR1g		1.28	1.37
Grid	Steps	12.0 x 12.0	5.0 x 5.0 x 5.0	[W/kg]			
	[mm]			psSAR10g		0.608	0.614
Sensor		3.0	1.4	[W/kg]			
Surface [mm]				Power Drift		-0.01	-0.03
Graded Grid		Yes	Yes	[dB]			
Grading Ratio		1.5	1.5	Power Scaling		Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor			
Surface		VMS + 6p	VMS + 6p	[dB]			
Detection				TSL		No correction	No correction
Scan Method		Measured	Measured	Correction			
				M2/M1 [%]			44.9
				Dist 3dB Peak			7.6
				[mm]			

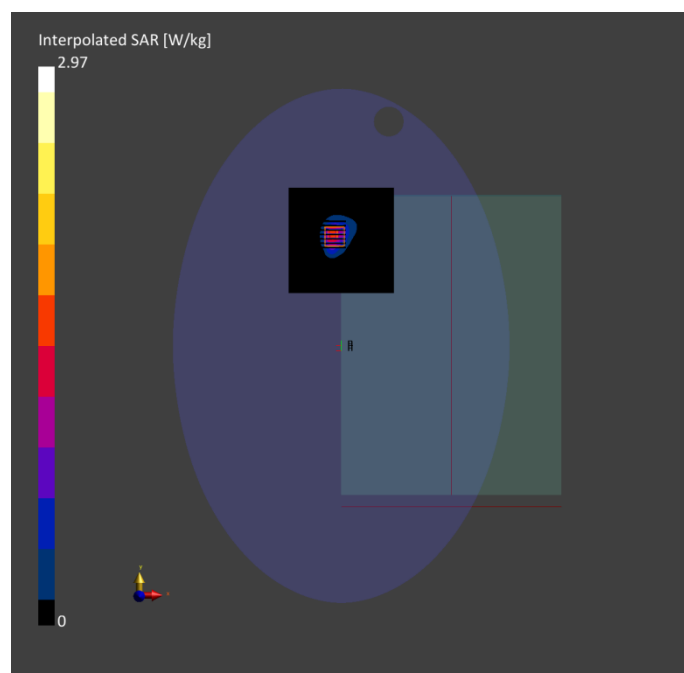

Meas.14 Limbs Plane with Keyboard Side 0mm on 11 Channel in IEEE802.11b mode with Antenna Main

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	WLA N 2.4G Hz	WLAN, 10012- CAB	2462.0, 11	6.98	1.84	39.5	22.3	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-18	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

Measurement Results

		Area Scan	Zoom Scan			Area Scan	Zoom Scan
Grid	Extents	120.0 x 120.0	30.0 x 30.0 x	Date		2025-03-18	2025-03-18
	[mm]		30.0	psSAR1g		1.29	1.34
Grid	Steps	12.0 x 12.0	5.0 x 5.0 x 5.0	[W/kg]			
	[mm]			psSAR10g		0.563	0.569
Sensor		3.0	1.4	[W/kg]			
Surface [mm]				Power Drift		-0.01	0.04
Graded Grid		Yes	Yes	[dB]			
Grading Ratio		1.5	1.5	Power Scaling		Disabled	Disabled
MAIA		N/A	N/A	Scaling Factor			
Surface		VMS + 6p	VMS + 6p	[dB]			
Detection				TSL		No correction	No correction
Scan Method		Measured	Measured	Correction			
				M2/M1 [%]			44.5
				Dist 3dB Peak			7.2
				[mm]			

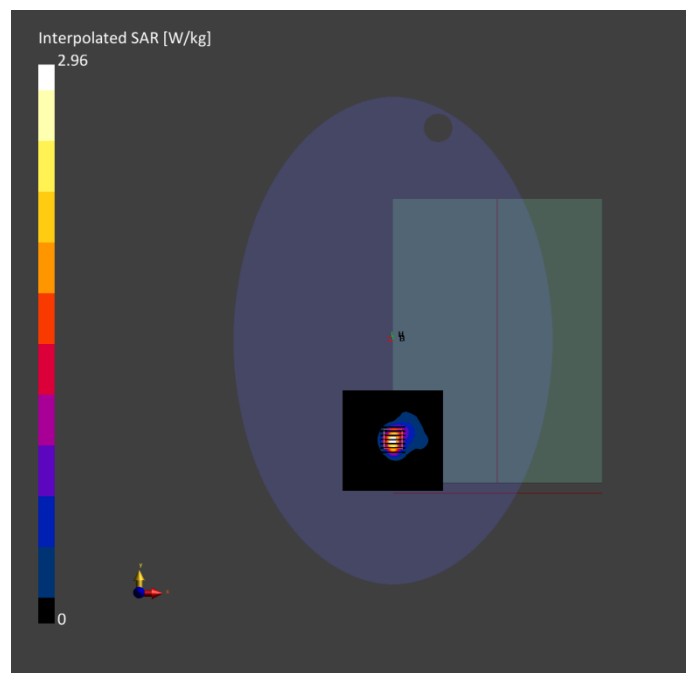

Meas.15 Limbs Plane with Keyboard Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5290.0, 58	5.44	4.79	35.2	22.5	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-19	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-19	2025-03-19
psSAR1g [W/kg]	0.823	1.10
psSAR10g [W/kg]	0.256	0.284
Power Drift [dB]	0.00	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		52.0
Dist 3dB Peak [mm]		5.1

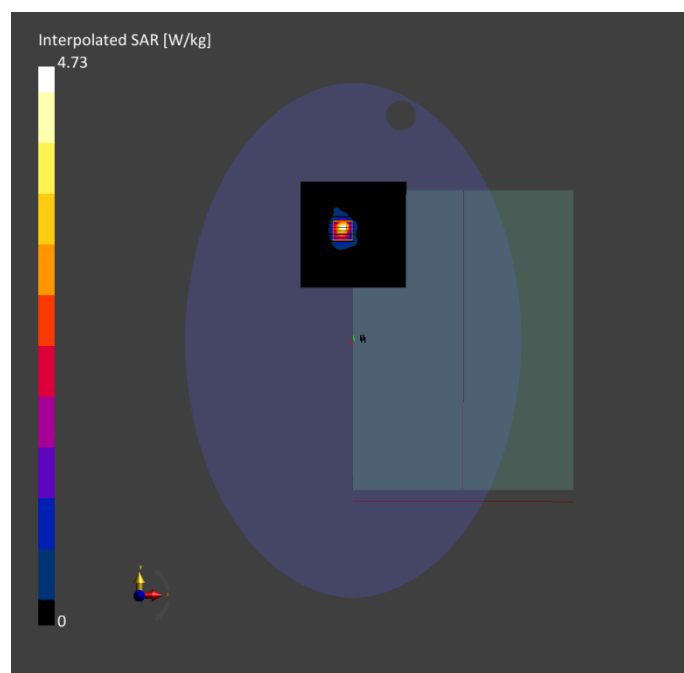

Meas.16 Limbs Plane with Keyboard Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5290.0, 58	5.44	4.79	35.2	22.5	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-19	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-19	2025-03-19
psSAR1g [W/kg]	1.55	1.56
psSAR10g [W/kg]	0.511	0.514
Power Drift [dB]	-0.08	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		51.9
Dist 3dB Peak [mm]		7.2

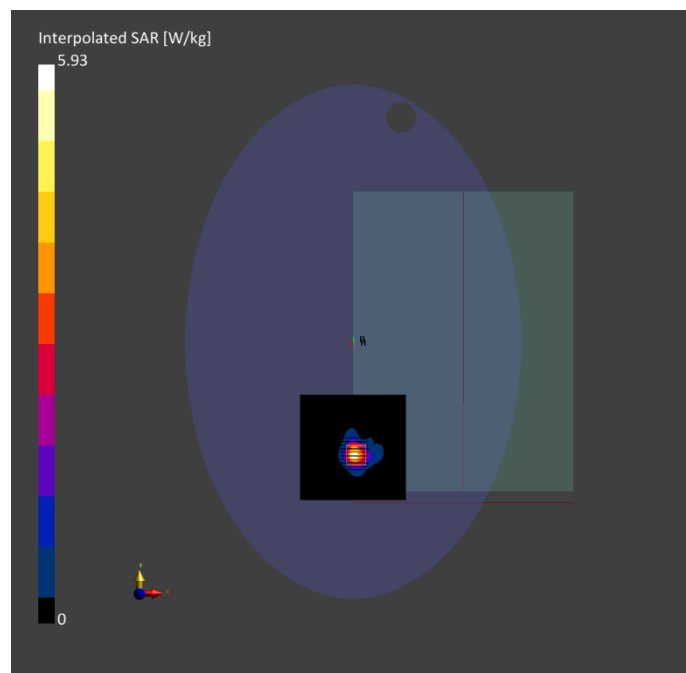

Meas.17 Limbs Plane with Keyboard Side 0mm on 138 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5690.0, 138	4.98	5.19	34.0	22.5	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-21	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-21	2025-03-21
psSAR1g [W/kg]	1.30	1.79
psSAR10g [W/kg]	0.402	0.451
Power Drift [dB]	0.02	0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		49.0
Dist 3dB Peak [mm]		5.4

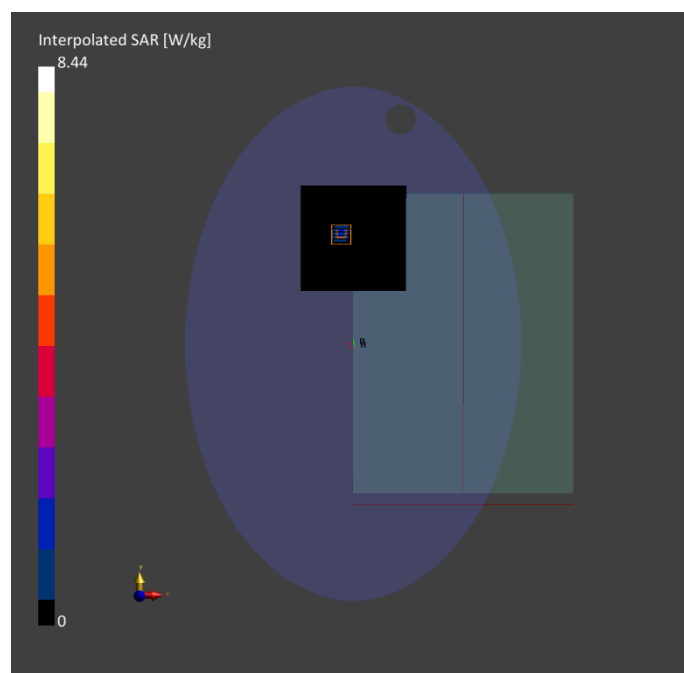

Meas.18 Limbs Plane with Keyboard Side 0mm on 138 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5690.0, 138	4.98	5.19	34.0	22.5	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-21	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-21	2025-03-21
psSAR1g [W/kg]	1.16	1.19
psSAR10g [W/kg]	0.381	0.382
Power Drift [dB]	-0.05	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		48.4
Dist 3dB Peak [mm]		7.2

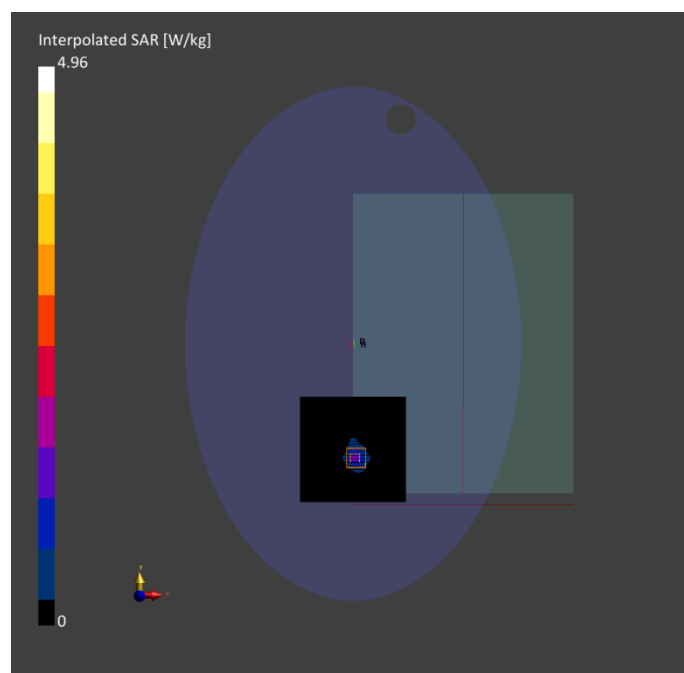

Meas.19 Limbs Plane with Keyboard Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5775.0, 155	4.98	5.23	35.3	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-25	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-25	2025-03-25
psSAR1g [W/kg]	1.28	1.79
psSAR10g [W/kg]	0.399	0.450
Power Drift [dB]	0.00	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		48.6
Dist 3dB Peak [mm]		5.1

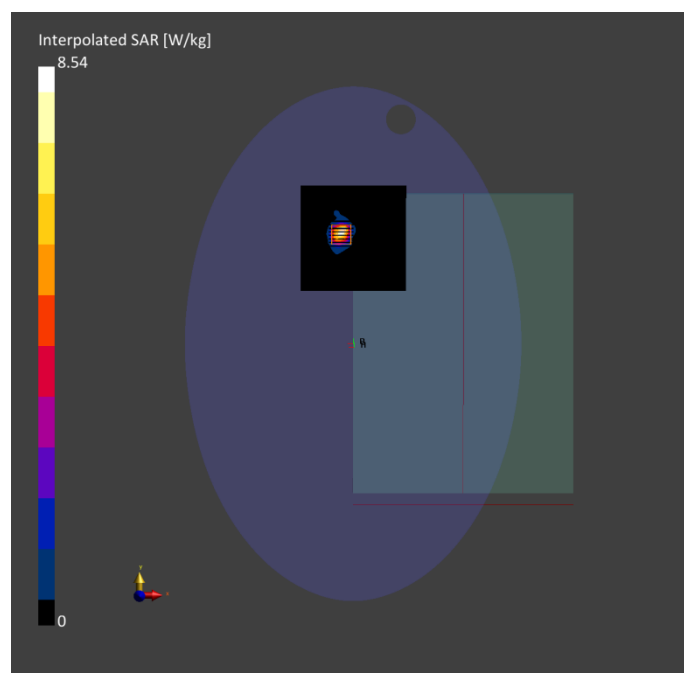

Meas.20 Limbs Plane with Keyboard Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	WLA N 5GHz	WLAN, 10544- AAD	5775.0, 155	4.98	5.23	35.3	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03- 25	EX3DV4 - SN7893, 2024-09- 05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-25	2025-03-25
psSAR1g [W/kg]	0.861	0.864
psSAR10g [W/kg]	0.290	0.282
Power Drift [dB]	-0.06	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		47.8
Dist 3dB Peak [mm]		7.2

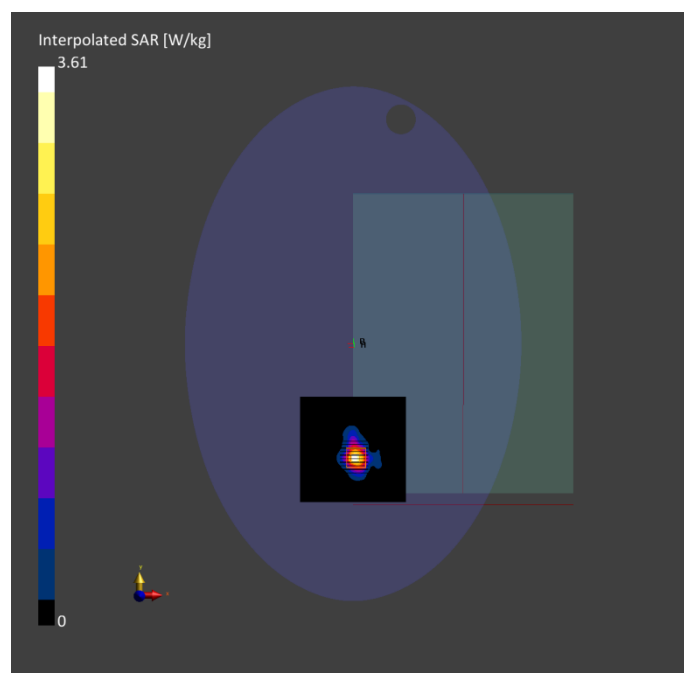

Meas.21 Limbs Plane with Keyboard Side 0mm on 171 Channel in IEEE802.11ac80 mode with Antenna Auxiliary
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	Custo m Band	CW, 10544- AAD	5855.0, 171	4.98	5.39	35.0	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-25	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-25	2025-03-25
psSAR1g [W/kg]	0.870	1.20
psSAR10g [W/kg]	0.270	0.299
Power Drift [dB]	-0.03	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		47.6
Dist 3dB Peak [mm]		5.1

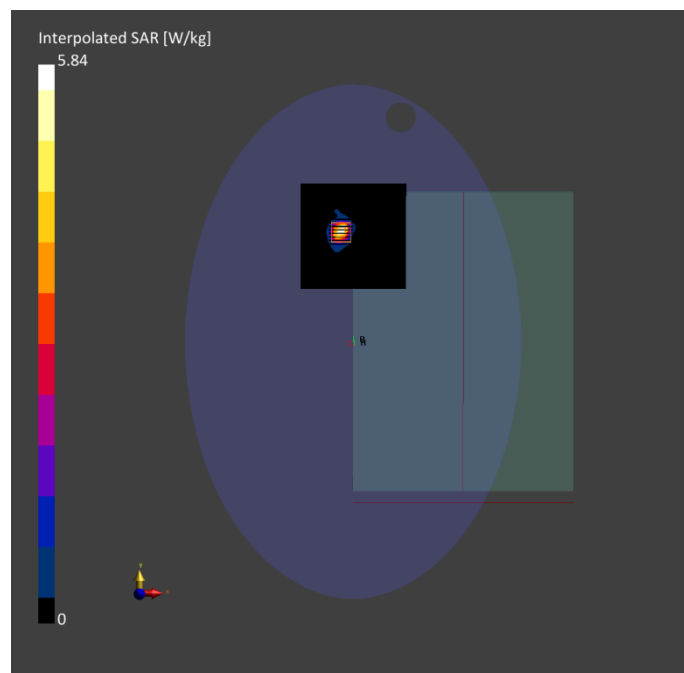

Meas.22 Limbs Plane with Keyboard Side 0mm on 171 Channel in IEEE802.11ac80 mode with Antenna Main
Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequenc y [MHz], Channel Number	Conversi on Factor	TSL Conduct ivity [S/m]	TSL Permitti vity	Ambient Tempera ture [°C]	Liquid Tempera ture [°C]
Flat, HSL	FRONT, 0.00	Custo m Band	CW, 10544- AAD	5855.0, 171	4.98	5.39	35.0	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-03-25	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn878, 2025-03-05

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor	3.0	1.4
Surface [mm]		
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-25	2025-03-25
psSAR1g [W/kg]	0.602	0.605
psSAR10g [W/kg]	0.208	0.204
Power Drift [dB]	-0.06	-0.13
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL	No correction	No correction
Correction		
M2/M1 [%]		46.9
Dist 3dB Peak [mm]		7.4

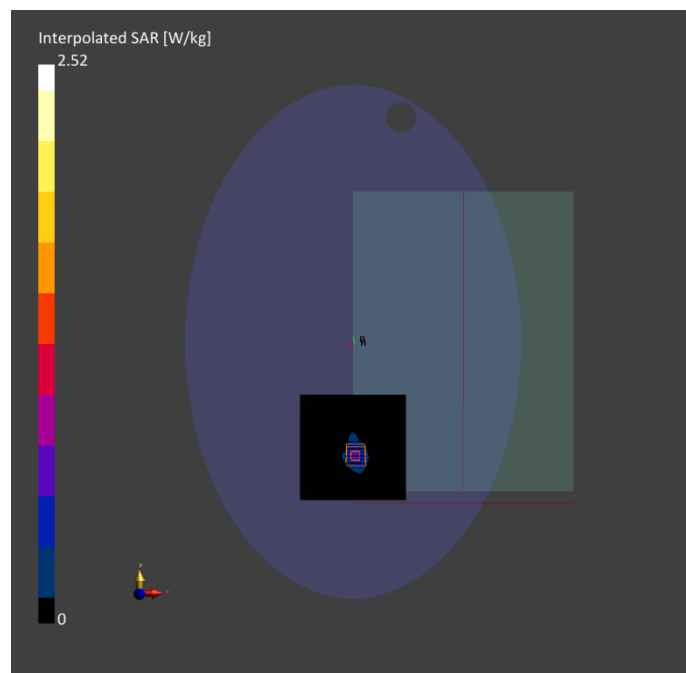

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2530219-AW.pdf”.

ANNEX E SAR TEST SETUP PHOTOS

Please refer the document “BL-SZ2530219-AS-1.pdf”.

ANNEX F CALIBRATION REPORT

Please refer the document “BL-SZ2530219-AC-2.pdf”.

ANNEX G TUNE-UP PROCEDURE

Please refer the document “BL-SZ2530219-AT-3.pdf”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--