

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom of Laptop_0mm_Ch6

Communication System: IEEE 802.11b; Frequency: 2437.000 MHz; Duty Cycle: 1:1.001
Medium: HSL_2450_231105 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.5, 7.5, 7.5); Calibrated: 2023-03-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2023-02-22
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2153; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10012-CAB

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.001 W/kg; SAR (10g) = 0.001 W/kg

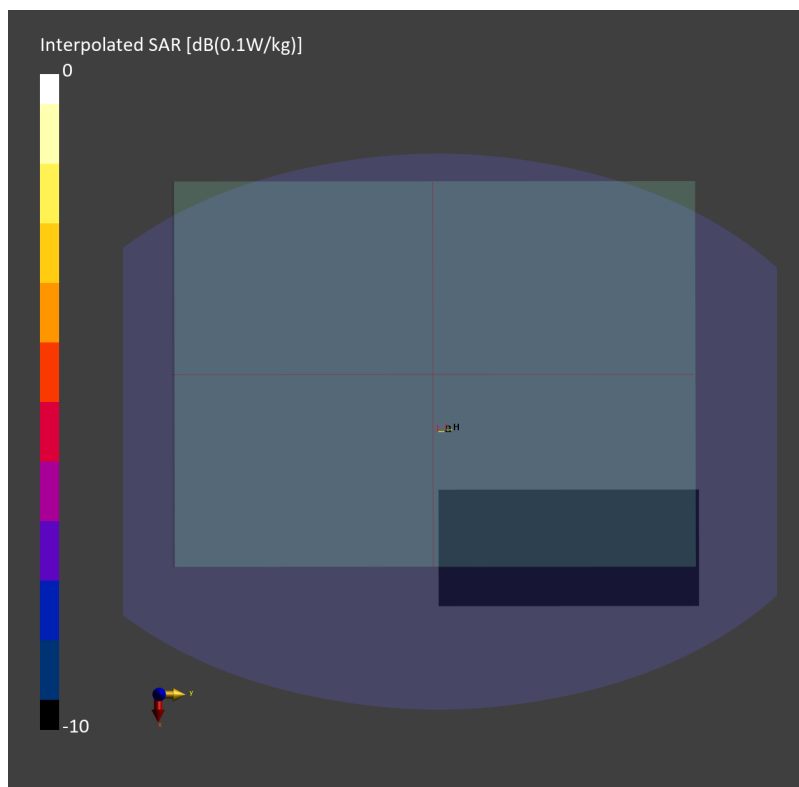

#02_WLAN5GHz_802.11n-HT40 MCS0_Bottom of Laptop_0mm_Ch54

Communication System: IEEE 802.11n ; Frequency: 5270.000 MHz; Duty Cycle: 1:1
Medium: HSL_5G_231106 Medium parameters used: $f=5270.000$ MHz; $\sigma=4.66$ S/m; $\epsilon_r=35.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.93, 5.47, 4.85); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2023-03-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2192_0mm; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD


Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.054 W/kg; SAR (10g) = 0.023 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.060 W/kg; SAR (8g) = 0.031 W/kg; SAR (10g) = 0.028 W/kg

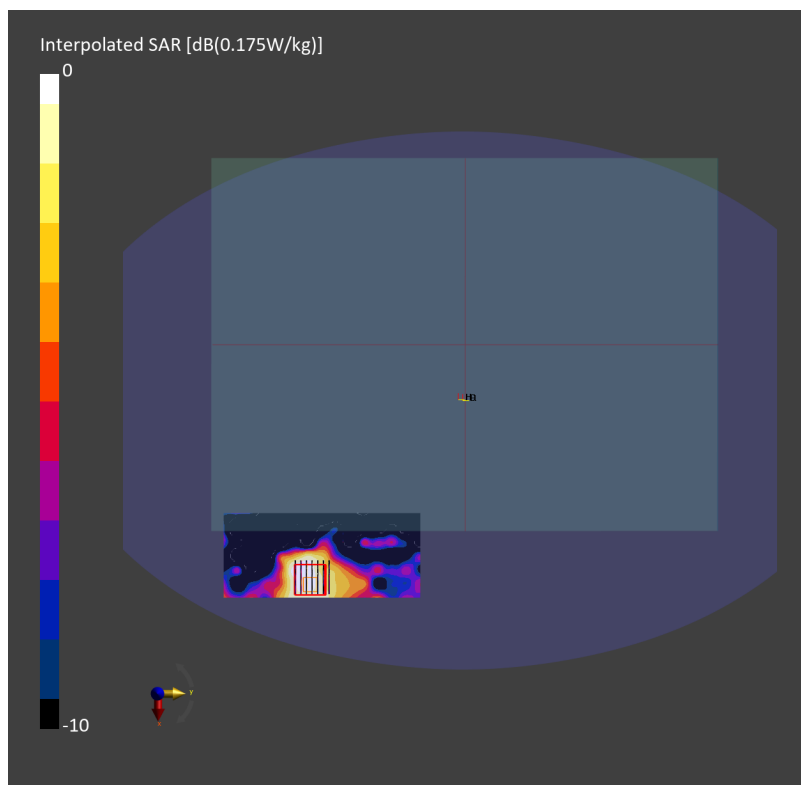

#03_WLAN5GHz_802.11n-HT40 MCS0_Bottom of Laptop_0mm_Ch110

Communication System: IEEE 802.11n ; Frequency: 5550.000 MHz; Duty Cycle: 1:1
Medium: HSL_5G_231106 Medium parameters used: $f=5550.000$ MHz; $\sigma=4.98$ S/m; $\epsilon_r=35.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.35, 4.72, 4.41); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2023-03-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2192_0mm; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD


Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.064 W/kg; SAR (10g) = 0.028 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.074 W/kg; SAR (8g) = 0.047 W/kg; SAR (10g) = 0.044 W/kg

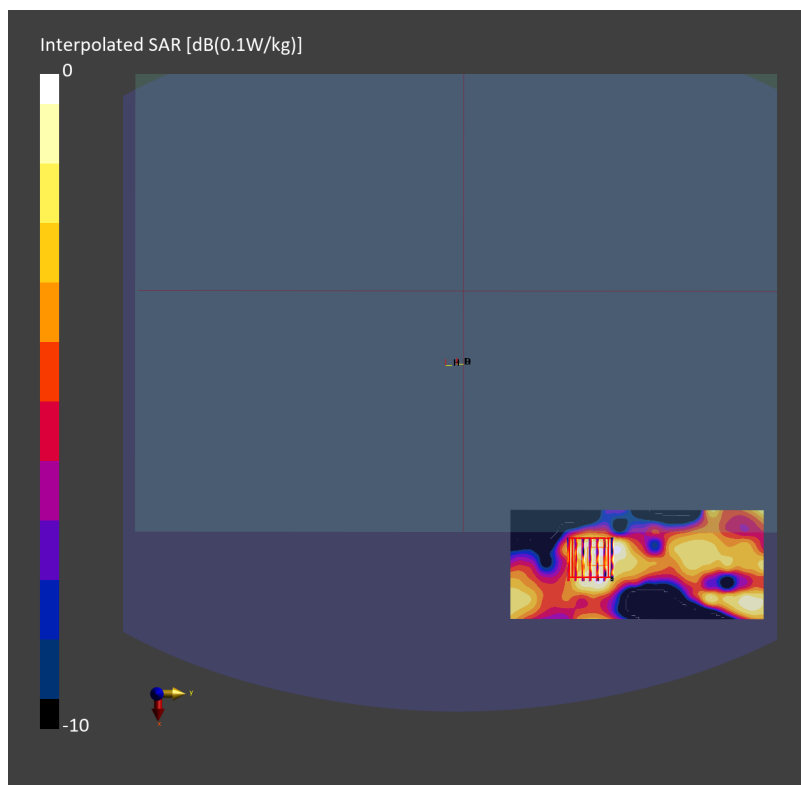

#04_WLAN5GHz_802.11n-HT40 MCS0_Bottom of Laptop_0mm_Ch159

Communication System: IEEE 802.11n ; Frequency: 5795.000 MHz; Duty Cycle: 1:1
Medium: HSL_5G_231106 Medium parameters used: $f=5795.000$ MHz; $\sigma=5.27$ S/m; $\epsilon_r=34.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.44, 4.92, 4.4); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2023-03-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2192_0mm; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10114-CAE


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.074 W/kg; SAR (10g) = 0.030 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.070 W/kg; SAR (8g) = 0.045 W/kg; SAR (10g) = 0.043 W/kg

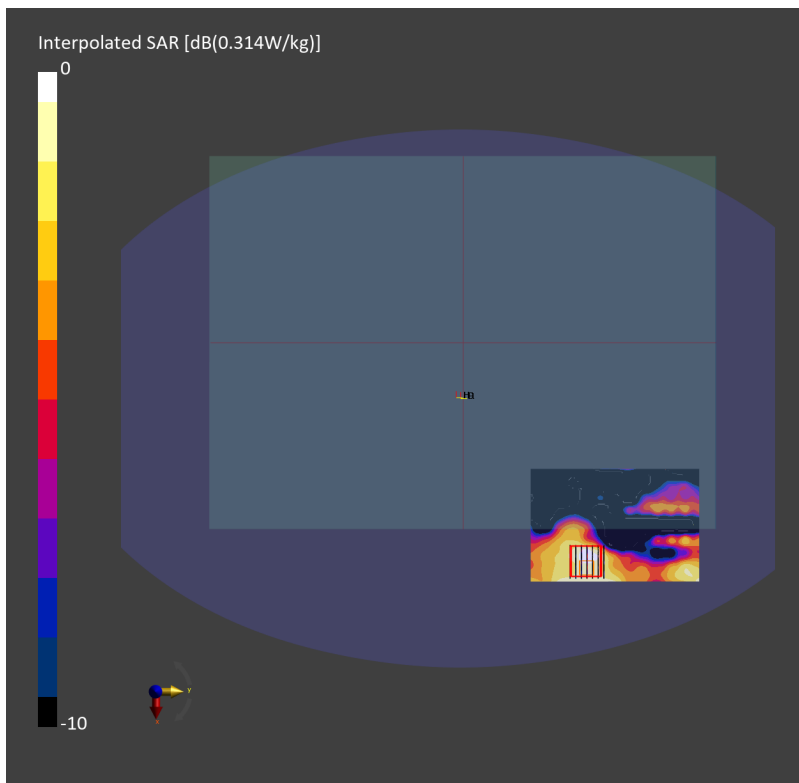

#05_WLAN6GHz_802.11ax-HE160 MCS0_Bottom of Laptop_0mm_Ch15

Communication System: IEEE 802.11ax ; Frequency: 6025.000 MHz; Duty Cycle: 1:1.040
Medium: HSL_6G_231108 Medium parameters used: $f = 6025.000$ MHz; $\sigma = 5.52$ S/m; $\epsilon_r = 36.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.8, 4.6, 4.93); Calibrated: 2023-03-08
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2023-09-14
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10755-AAC

Area Scan (68.0 mm x 153.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.001 W/kg; SAR (10g) = 0.001 W/kg;

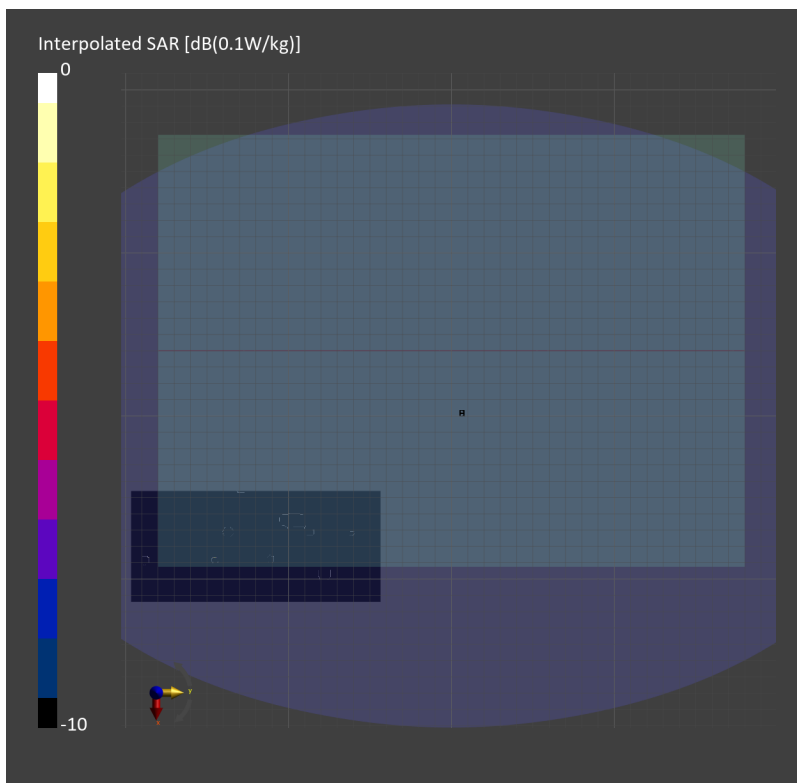

#06_Bluetooth_1Mbps_Bottom of Laptop_0mm_Ch0

Communication System: IEEE 802.15.1 Bluetooth ; Frequency: 2402.000 MHz; Duty Cycle: 1:1
Medium: HSL_2450_231106 Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.6$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.82, 7.82, 7.82); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2023-01-09
- Phantom: ELI V4.0 (20deg probe tilt); Serial: 1227; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10030-CAA

Area Scan (80.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.004 W/kg; SAR (10g) = 0.002 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.005 W/kg; SAR (8g) = 0.003 W/kg; SAR (10g) = 0.002 W/kg

