

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	102.7 PK			2.57 H	229	57.8	44.9
2	*6625.00	90.3 AV			2.57 H	229	45.4	44.9
3	13250.00	57.8 PK	74.0	-16.2	1.08 H	291	48.7	9.1
4	13250.00	45.0 AV	54.0	-9.0	1.08 H	291	35.9	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	113.7 PK			1.80 V	76	68.8	44.9
2	*6625.00	101.5 AV			1.80 V	76	56.6	44.9
3	13250.00	57.2 PK	74.0	-16.8	2.71 V	151	48.1	9.1
4	13250.00	44.6 AV	54.0	-9.4	2.71 V	151	35.5	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	102.9 PK			2.57 H	223	57.9	45.0
2	*6705.00	90.5 AV			2.57 H	223	45.5	45.0
3	#13410.00	57.5 PK	88.2	-30.7	2.78 H	317	47.8	9.7
4	#13410.00	45.1 AV	68.2	-23.1	2.78 H	317	35.4	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.1 PK			1.78 V	76	69.1	45.0
2	*6705.00	101.8 AV			1.78 V	76	56.8	45.0
3	#13410.00	58.3 PK	88.2	-29.9	1.98 V	243	48.6	9.7
4	#13410.00	45.8 AV	68.2	-22.4	1.98 V	243	36.1	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	103.0 PK			2.62 H	229	58.0	45.0
2	*6785.00	90.7 AV			2.62 H	229	45.7	45.0
3	#13570.00	57.3 PK	88.2	-30.9	2.60 H	149	48.3	9.0
4	#13570.00	44.5 AV	68.2	-23.7	2.60 H	149	35.5	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	114.3 PK			1.74 V	58	69.3	45.0
2	*6785.00	102.0 AV			1.74 V	58	57.0	45.0
3	#13570.00	58.0 PK	88.2	-30.2	1.49 V	20	49.0	9.0
4	#13570.00	45.3 AV	68.2	-22.9	1.49 V	20	36.3	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.3 PK	88.2	-18.9	2.51 H	229	64.9	4.4
2	#5925.00	49.6 AV	68.2	-18.6	2.51 H	229	45.2	4.4
3	*6025.00	93.4 PK			2.51 H	229	51.1	42.3
4	*6025.00	81.0 AV			2.51 H	229	38.7	42.3
5	12050.00	56.2 PK	74.0	-17.8	2.66 H	309	47.6	8.6
6	12050.00	43.8 AV	54.0	-10.2	2.66 H	309	35.2	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.8 PK	88.2	-8.4	1.64 V	63	75.4	4.4
2	#5925.00	57.2 AV	68.2	-11.0	1.64 V	63	52.8	4.4
3	*6025.00	104.9 PK			1.64 V	63	62.6	42.3
4	*6025.00	92.5 AV			1.64 V	63	50.2	42.3
5	12050.00	57.1 PK	74.0	-16.9	1.85 V	242	48.5	8.6
6	12050.00	44.7 AV	54.0	-9.3	1.85 V	242	36.1	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	94.4 PK			2.49 H	233	51.2	43.2
2	*6185.00	81.9 AV			2.49 H	233	38.7	43.2
3	12370.00	57.0 PK	74.0	-17.0	1.49 H	225	48.2	8.8
4	12370.00	44.4 AV	54.0	-9.6	1.49 H	225	35.6	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	106.0 PK			1.59 V	63	62.8	43.2
2	*6185.00	93.5 AV			1.59 V	63	50.3	43.2
3	12370.00	56.9 PK	74.0	-17.1	2.40 V	179	48.1	8.8
4	12370.00	44.1 AV	54.0	-9.9	2.40 V	179	35.3	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	95.5 PK			2.54 H	223	51.3	44.2
2	*6345.00	83.1 AV			2.54 H	223	38.9	44.2
3	12690.00	57.6 PK	74.0	-16.4	2.04 H	156	48.0	9.6
4	12690.00	44.8 AV	54.0	-9.2	2.04 H	156	35.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.1 PK			1.64 V	35	62.9	44.2
2	*6345.00	94.7 AV			1.64 V	35	50.5	44.2
3	12690.00	58.4 PK	74.0	-15.6	1.61 V	208	48.8	9.6
4	12690.00	45.6 AV	54.0	-8.4	1.61 V	208	36.0	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.7 PK			2.57 H	224	59.7	45.0
2	*6665.00	92.1 AV			2.57 H	224	47.1	45.0
3	13330.00	57.0 PK	74.0	-17.0	2.66 H	313	47.8	9.2
4	13330.00	44.5 AV	54.0	-9.5	2.66 H	313	35.3	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.1 PK			1.73 V	77	61.1	45.0
2	*6665.00	93.4 AV			1.73 V	77	48.4	45.0
3	13330.00	57.8 PK	74.0	-16.2	1.91 V	245	48.6	9.2
4	13330.00	45.2 AV	54.0	-8.8	1.91 V	245	36.0	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Partial RU_1TX

26-tone RU

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.7 PK	88.2	-28.5	2.63 H	232	55.3	4.4
2	#5925.00	46.6 AV	68.2	-21.6	2.63 H	232	42.2	4.4
3	*5955.00	110.6 PK			2.63 H	232	68.4	42.2
4	*5955.00	98.3 AV			2.63 H	232	56.1	42.2
5	11910.00	57.2 PK	74.0	-16.8	2.68 H	315	48.6	8.6
6	11910.00	44.7 AV	54.0	-9.3	2.68 H	315	36.1	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.9 PK	88.2	-25.3	1.40 V	71	58.5	4.4
2	#5925.00	47.9 AV	68.2	-20.3	1.40 V	71	43.5	4.4
3	*5955.00	120.2 PK			1.40 V	71	78.0	42.2
4	*5955.00	109.3 AV			1.40 V	71	67.1	42.2
5	11910.00	57.7 PK	74.0	-16.3	1.89 V	238	49.1	8.6
6	11910.00	45.0 AV	54.0	-9.0	1.89 V	238	36.4	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.1 PK			2.54 H	226	64.9	43.2
2	*6195.00	96.8 AV			2.54 H	226	53.6	43.2
3	12390.00	57.5 PK	74.0	-16.5	2.84 H	326	48.6	8.9
4	12390.00	45.0 AV	54.0	-9.0	2.84 H	326	36.1	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.1 PK			1.73 V	76	75.9	43.2
2	*6195.00	108.0 AV			1.73 V	76	64.8	43.2
3	12390.00	58.0 PK	74.0	-16.0	1.94 V	241	49.1	8.9
4	12390.00	45.7 AV	54.0	-8.3	1.94 V	241	36.8	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.2 PK			2.57 H	218	64.6	44.6
2	*6415.00	97.9 AV			2.57 H	218	53.3	44.6
3	#12830.00	58.3 PK	88.2	-29.9	1.26 H	24	48.8	9.5
4	#12830.00	45.5 AV	68.2	-22.7	1.26 H	24	36.0	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.1 PK			1.75 V	82	75.5	44.6
2	*6415.00	109.1 AV			1.75 V	82	64.5	44.6
3	#12830.00	58.5 PK	88.2	-29.7	2.33 V	201	49.0	9.5
4	#12830.00	45.8 AV	68.2	-22.4	2.33 V	201	36.3	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.7 PK			2.57 H	221	66.8	44.9
2	*6535.00	100.1 AV			2.57 H	221	55.2	44.9
3	#13070.00	57.8 PK	88.2	-30.4	1.47 H	161	48.8	9.0
4	#13070.00	45.0 AV	68.2	-23.2	1.47 H	161	36.0	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.7 PK			1.83 V	87	77.8	44.9
2	*6535.00	111.2 AV			1.83 V	87	66.3	44.9
3	#13070.00	57.5 PK	88.2	-30.7	1.62 V	306	48.5	9.0
4	#13070.00	44.8 AV	68.2	-23.4	1.62 V	306	35.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.4 PK			2.57 H	221	66.4	45.0
2	*6695.00	99.8 AV			2.57 H	221	54.8	45.0
3	13390.00	58.5 PK	74.0	-15.5	2.81 H	309	48.9	9.6
4	13390.00	46.0 AV	54.0	-8.0	2.81 H	309	36.4	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.6 PK			1.83 V	87	77.6	45.0
2	*6695.00	111.1 AV			1.83 V	87	66.1	45.0
3	13390.00	59.1 PK	74.0	-14.9	1.99 V	234	49.5	9.6
4	13390.00	46.5 AV	54.0	-7.5	1.99 V	234	36.9	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.4 PK			2.48 H	226	66.1	45.3
2	*6855.00	99.0 AV			2.48 H	226	53.7	45.3
3	#13710.00	57.7 PK	88.2	-30.5	2.74 H	301	48.7	9.0
4	#13710.00	45.1 AV	68.2	-23.1	2.74 H	301	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.7 PK			1.69 V	83	76.4	45.3
2	*6855.00	109.3 AV			1.69 V	83	64.0	45.3
3	#13710.00	57.9 PK	88.2	-30.3	1.94 V	251	48.9	9.0
4	#13710.00	45.5 AV	68.2	-22.7	1.94 V	251	36.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

52-tone RU

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.0 PK	88.2	-28.2	2.60 H	234	55.6	4.4
2	#5925.00	46.7 AV	68.2	-21.5	2.60 H	234	42.3	4.4
3	*5955.00	112.0 PK			2.60 H	234	69.8	42.2
4	*5955.00	98.5 AV			2.60 H	234	56.3	42.2
5	11910.00	57.0 PK	74.0	-17.0	2.76 H	311	48.4	8.6
6	11910.00	44.5 AV	54.0	-9.5	2.76 H	311	35.9	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.8 PK	88.2	-21.4	1.44 V	76	62.4	4.4
2	#5925.00	48.8 AV	68.2	-19.4	1.44 V	76	44.4	4.4
3	*5955.00	122.1 PK			1.44 V	76	79.9	42.2
4	*5955.00	109.4 AV			1.44 V	76	67.2	42.2
5	11910.00	57.6 PK	74.0	-16.4	1.93 V	244	49.0	8.6
6	11910.00	45.0 AV	54.0	-9.0	1.93 V	244	36.4	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.6 PK			2.50 H	229	65.4	43.2
2	*6195.00	97.0 AV			2.50 H	229	53.8	43.2
3	12390.00	57.4 PK	74.0	-16.6	2.82 H	324	48.5	8.9
4	12390.00	45.1 AV	54.0	-8.9	2.82 H	324	36.2	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.0 PK			1.71 V	72	76.8	43.2
2	*6195.00	108.2 AV			1.71 V	72	65.0	43.2
3	12390.00	57.8 PK	74.0	-16.2	1.91 V	238	48.9	8.9
4	12390.00	45.6 AV	54.0	-8.4	1.91 V	238	36.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.8 PK			2.57 H	218	65.2	44.6
2	*6415.00	98.1 AV			2.57 H	218	53.5	44.6
3	#12830.00	57.7 PK	88.2	-30.5	1.08 H	274	48.2	9.5
4	#12830.00	45.1 AV	68.2	-23.1	1.08 H	274	35.6	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.0 PK			1.75 V	82	76.4	44.6
2	*6415.00	109.3 AV			1.75 V	82	64.7	44.6
3	#12830.00	57.9 PK	88.2	-30.3	1.96 V	77	48.4	9.5
4	#12830.00	45.1 AV	68.2	-23.1	1.96 V	77	35.6	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.1 PK			2.55 H	233	67.2	44.9
2	*6535.00	99.8 AV			2.55 H	233	54.9	44.9
3	#13070.00	58.1 PK	88.2	-30.1	1.52 H	204	49.1	9.0
4	#13070.00	45.3 AV	68.2	-22.9	1.52 H	204	36.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.8 PK			1.81 V	85	78.9	44.9
2	*6535.00	111.4 AV			1.81 V	85	66.5	44.9
3	#13070.00	58.2 PK	88.2	-30.0	2.36 V	112	49.2	9.0
4	#13070.00	45.7 AV	68.2	-22.5	2.36 V	112	36.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.7 PK			2.55 H	223	67.7	45.0
2	*6695.00	100.3 AV			2.55 H	223	55.3	45.0
3	13390.00	58.4 PK	74.0	-15.6	2.79 H	306	48.8	9.6
4	13390.00	46.0 AV	54.0	-8.0	2.79 H	306	36.4	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	124.2 PK			1.81 V	85	79.2	45.0
2	*6695.00	111.7 AV			1.81 V	85	66.7	45.0
3	13390.00	59.0 PK	74.0	-15.0	1.97 V	231	49.4	9.6
4	13390.00	46.4 AV	54.0	-7.6	1.97 V	231	36.8	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.2 PK			2.48 H	226	67.9	45.3
2	*6855.00	100.8 AV			2.48 H	226	55.5	45.3
3	#13710.00	57.3 PK	88.2	-30.9	2.74 H	301	48.3	9.0
4	#13710.00	44.5 AV	68.2	-23.7	2.74 H	301	35.5	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	124.4 PK			1.69 V	83	79.1	45.3
2	*6855.00	111.8 AV			1.69 V	83	66.5	45.3
3	#13710.00	57.5 PK	88.2	-30.7	1.94 V	251	48.5	9.0
4	#13710.00	44.9 AV	68.2	-23.3	1.94 V	251	35.9	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

106-tone RU

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.4 PK	88.2	-9.8	2.61 H	231	74.0	4.4
2	#5925.00	48.0 AV	68.2	-20.2	2.61 H	231	43.6	4.4
3	*5955.00	111.5 PK			2.61 H	231	69.3	42.2
4	*5955.00	99.1 AV			2.61 H	231	56.9	42.2
5	11910.00	57.2 PK	74.0	-16.8	2.68 H	313	48.6	8.6
6	11910.00	44.7 AV	54.0	-9.3	2.68 H	313	36.1	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.1 PK	88.2	-4.1	1.42 V	77	79.7	4.4
2	#5925.00	51.3 AV	68.2	-16.9	1.42 V	77	46.9	4.4
3	*5955.00	122.3 PK			1.42 V	77	80.1	42.2
4	*5955.00	109.9 AV			1.42 V	77	67.7	42.2
5	11910.00	57.7 PK	74.0	-16.3	1.87 V	239	49.1	8.6
6	11910.00	45.3 AV	54.0	-8.7	1.87 V	239	36.7	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	109.3 PK			2.51 H	232	66.1	43.2
2	*6195.00	97.8 AV			2.51 H	232	54.6	43.2
3	12390.00	57.5 PK	74.0	-16.5	2.79 H	321	48.6	8.9
4	12390.00	45.1 AV	54.0	-8.9	2.79 H	321	36.2	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.5 PK			1.72 V	77	77.3	43.2
2	*6195.00	109.1 AV			1.72 V	77	65.9	43.2
3	12390.00	57.9 PK	74.0	-16.1	1.89 V	246	49.0	8.9
4	12390.00	45.5 AV	54.0	-8.5	1.89 V	246	36.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.8 PK			2.57 H	218	66.2	44.6
2	*6415.00	99.2 AV			2.57 H	218	54.6	44.6
3	#12830.00	58.6 PK	88.2	-29.6	2.36 H	174	49.1	9.5
4	#12830.00	46.0 AV	68.2	-22.2	2.36 H	174	36.5	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.1 PK			1.75 V	82	77.5	44.6
2	*6415.00	110.4 AV			1.75 V	82	65.8	44.6
3	#12830.00	58.3 PK	88.2	-29.9	1.81 V	206	48.8	9.5
4	#12830.00	45.7 AV	68.2	-22.5	1.81 V	206	36.2	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.3 PK			2.54 H	118	67.4	44.9
2	*6535.00	101.2 AV			2.54 H	118	56.3	44.9
3	#13070.00	57.8 PK	88.2	-30.4	3.14 H	178	48.8	9.0
4	#13070.00	44.9 AV	68.2	-23.3	3.14 H	178	35.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.4 PK			1.90 V	82	78.5	44.9
2	*6535.00	112.3 AV			1.90 V	82	67.4	44.9
3	#13070.00	57.7 PK	88.2	-30.5	1.64 V	253	48.7	9.0
4	#13070.00	45.0 AV	68.2	-23.2	1.64 V	253	36.0	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.5 PK			2.54 H	218	67.5	45.0
2	*6695.00	101.3 AV			2.54 H	218	56.3	45.0
3	13390.00	58.3 PK	74.0	-15.7	2.78 H	301	48.7	9.6
4	13390.00	45.9 AV	54.0	-8.1	2.78 H	301	36.3	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	123.7 PK			1.85 V	86	78.7	45.0
2	*6695.00	112.6 AV			1.85 V	86	67.6	45.0
3	13390.00	58.8 PK	74.0	-15.2	2.01 V	228	49.2	9.6
4	13390.00	46.3 AV	54.0	-7.7	2.01 V	228	36.7	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.9 PK			2.50 H	229	65.6	45.3
2	*6855.00	99.3 AV			2.50 H	229	54.0	45.3
3	#13710.00	57.5 PK	88.2	-30.7	2.77 H	303	48.5	9.0
4	#13710.00	45.0 AV	68.2	-23.2	2.77 H	303	36.0	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.8 PK			1.70 V	86	76.5	45.3
2	*6855.00	110.6 AV			1.70 V	86	65.3	45.3
3	#13710.00	57.8 PK	88.2	-30.4	1.96 V	250	48.8	9.0
4	#13710.00	45.4 AV	68.2	-22.8	1.96 V	250	36.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode A

under control of standard power AP

2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.1 PK	88.2	-28.1	2.57 H	225	55.7	4.4
2	#5925.00	46.7 AV	68.2	-21.5	2.57 H	225	42.3	4.4
3	*5955.00	106.6 PK			2.57 H	225	64.4	42.2
4	*5955.00	96.9 AV			2.57 H	225	54.7	42.2
5	11910.00	57.3 PK	74.0	-16.7	1.67 H	323	48.7	8.6
6	11910.00	44.8 AV	54.0	-9.2	1.67 H	323	36.2	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.6 PK	88.2	-19.6	1.75 V	87	64.2	4.4
2	#5925.00	50.7 AV	68.2	-17.5	1.75 V	87	46.3	4.4
3	*5955.00	120.1 PK			1.75 V	87	77.9	42.2
4	*5955.00	109.5 AV			1.75 V	87	67.3	42.2
5	11910.00	57.9 PK	74.0	-16.1	2.14 V	276	49.3	8.6
6	11910.00	45.4 AV	54.0	-8.6	2.14 V	276	36.8	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	105.6 PK			2.53 H	214	62.4	43.2
2	*6195.00	95.7 AV			2.53 H	214	52.5	43.2
3	12390.00	57.8 PK	74.0	-16.2	N/A H	N/A	48.9	8.9
4	12390.00	45.1 AV	54.0	-8.9	N/A H	N/A	36.2	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.0 PK			1.82 V	96	74.8	43.2
2	*6195.00	108.2 AV			1.82 V	96	65.0	43.2
3	12390.00	57.6 PK	74.0	-16.4	2.25 V	107	48.7	8.9
4	12390.00	44.8 AV	54.0	-9.2	2.25 V	107	35.9	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.7 PK			2.53 H	220	62.1	44.6
2	*6415.00	96.9 AV			2.53 H	220	52.3	44.6
3	#12830.00	58.2 PK	88.2	-30.0	1.63 H	328	48.7	9.5
4	#12830.00	45.7 AV	68.2	-22.5	1.63 H	328	36.2	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.1 PK			1.84 V	92	74.5	44.6
2	*6415.00	109.3 AV			1.84 V	92	64.7	44.6
3	#12830.00	58.6 PK	88.2	-29.6	1.64 V	323	49.1	9.5
4	#12830.00	46.1 AV	68.2	-22.1	1.64 V	323	36.6	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.5 PK			2.58 H	234	62.6	44.9
2	*6535.00	97.8 AV			2.58 H	234	52.9	44.9
3	#13070.00	57.2 PK	88.2	-31.0	2.77 H	161	48.2	9.0
4	#13070.00	44.5 AV	68.2	-23.7	2.77 H	161	35.5	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.0 PK			1.69 V	86	75.1	44.9
2	*6535.00	110.2 AV			1.69 V	86	65.3	44.9
3	#13070.00	57.3 PK	88.2	-30.9	1.89 V	53	48.3	9.0
4	#13070.00	44.5 AV	68.2	-23.7	1.89 V	53	35.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.8 PK			2.58 H	226	62.8	45.0
2	*6695.00	98.1 AV			2.58 H	226	53.1	45.0
3	13390.00	58.1 PK	74.0	-15.9	1.67 H	321	48.5	9.6
4	13390.00	45.6 AV	54.0	-8.4	1.67 H	321	36.0	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.4 PK			1.74 V	86	75.4	45.0
2	*6695.00	110.5 AV			1.74 V	86	65.5	45.0
3	13390.00	58.5 PK	74.0	-15.5	2.16 V	279	48.9	9.6
4	13390.00	46.1 AV	54.0	-7.9	2.16 V	279	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.3 PK			2.54 H	228	63.0	45.3
2	*6855.00	98.7 AV			2.54 H	228	53.4	45.3
3	#13710.00	57.8 PK	88.2	-30.4	1.09 H	171	48.8	9.0
4	#13710.00	45.2 AV	68.2	-23.0	1.09 H	171	36.2	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.8 PK			1.90 V	79	75.5	45.3
2	*6855.00	110.8 AV			1.90 V	79	65.5	45.3
3	#13710.00	58.1 PK	88.2	-30.1	2.16 V	333	49.1	9.0
4	#13710.00	45.3 AV	68.2	-22.9	2.16 V	333	36.3	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.1 PK	88.2	-16.1	2.52 H	226	67.7	4.4
2	#5925.00	52.5 AV	68.2	-15.7	2.52 H	226	48.1	4.4
3	*5955.00	110.1 PK			2.52 H	226	67.9	42.2
4	*5955.00	98.1 AV			2.52 H	226	55.9	42.2
5	11910.00	57.4 PK	74.0	-16.6	1.66 H	325	48.8	8.6
6	11910.00	44.8 AV	54.0	-9.2	1.66 H	325	36.2	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.9 PK	88.2	-3.3	1.78 V	90	80.5	4.4
2	#5925.00	62.8 AV	68.2	-5.4	1.78 V	90	58.4	4.4
3	*5955.00	122.0 PK			1.78 V	90	79.8	42.2
4	*5955.00	110.5 AV			1.78 V	90	68.3	42.2
5	11910.00	58.0 PK	74.0	-16.0	2.21 V	276	49.4	8.6
6	11910.00	45.4 AV	54.0	-8.6	2.21 V	276	36.8	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	110.1 PK			2.52 H	236	66.9	43.2
2	*6195.00	98.0 AV			2.52 H	236	54.8	43.2
3	12390.00	57.6 PK	74.0	-16.4	1.65 H	322	48.7	8.9
4	12390.00	45.1 AV	54.0	-8.9	1.65 H	322	36.2	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.3 PK			1.74 V	89	79.1	43.2
2	*6195.00	110.4 AV			1.74 V	89	67.2	43.2
3	12390.00	58.0 PK	74.0	-16.0	2.23 V	282	49.1	8.9
4	12390.00	45.5 AV	54.0	-8.5	2.23 V	282	36.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.8 PK			2.53 H	236	67.2	44.6
2	*6415.00	99.7 AV			2.53 H	236	55.1	44.6
3	#12830.00	58.1 PK	88.2	-30.1	1.52 H	324	48.6	9.5
4	#12830.00	45.6 AV	68.2	-22.6	1.52 H	324	36.1	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.9 PK			1.74 V	84	79.3	44.6
2	*6415.00	112.0 AV			1.74 V	84	67.4	44.6
3	#12830.00	58.3 PK	88.2	-29.9	1.64 V	222	48.8	9.5
4	#12830.00	45.6 AV	68.2	-22.6	1.64 V	222	36.1	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.5 PK			2.54 H	230	65.6	44.9
2	*6535.00	98.6 AV			2.54 H	230	53.7	44.9
3	#13070.00	57.7 PK	88.2	-30.5	1.58 H	312	48.7	9.0
4	#13070.00	45.2 AV	68.2	-23.0	1.58 H	312	36.2	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.8 PK			1.79 V	91	77.9	44.9
2	*6535.00	111.1 AV			1.79 V	91	66.2	44.9
3	#13070.00	58.3 PK	88.2	-29.9	2.16 V	277	49.3	9.0
4	#13070.00	45.7 AV	68.2	-22.5	2.16 V	277	36.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.7 PK			2.56 H	234	65.7	45.0
2	*6695.00	98.6 AV			2.56 H	234	53.6	45.0
3	13390.00	58.1 PK	74.0	-15.9	1.62 H	329	48.5	9.6
4	13390.00	45.6 AV	54.0	-8.4	1.62 H	329	36.0	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	123.4 PK			1.85 V	90	78.4	45.0
2	*6695.00	111.2 AV			1.85 V	90	66.2	45.0
3	13390.00	58.7 PK	74.0	-15.3	2.19 V	274	49.1	9.6
4	13390.00	46.1 AV	54.0	-7.9	2.19 V	274	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.7 PK			2.57 H	234	65.4	45.3
2	*6855.00	98.7 AV			2.57 H	234	53.4	45.3
3	#13710.00	57.5 PK	88.2	-30.7	1.51 H	281	48.5	9.0
4	#13710.00	44.7 AV	68.2	-23.5	1.51 H	281	35.7	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	123.5 PK			1.84 V	93	78.2	45.3
2	*6855.00	111.3 AV			1.84 V	93	66.0	45.3
3	#13710.00	58.2 PK	88.2	-30.0	1.67 V	58	49.2	9.0
4	#13710.00	45.4 AV	68.2	-22.8	1.67 V	58	36.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.2 PK	88.2	-17.0	2.52 H	292	66.8	4.4
2	#5925.00	53.6 AV	68.2	-14.6	2.52 H	292	49.2	4.4
3	*5965.00	106.9 PK			2.52 H	292	64.7	42.2
4	*5965.00	92.9 AV			2.52 H	292	50.7	42.2
5	11930.00	57.8 PK	74.0	-16.2	1.65 H	116	49.2	8.6
6	11930.00	45.0 AV	54.0	-9.0	1.65 H	116	36.4	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.3 PK	88.2	-5.9	1.87 V	296	77.9	4.4
2	#5925.00	66.3 AV	68.2	-1.9	1.87 V	296	61.9	4.4
3	*5965.00	117.1 PK			1.87 V	296	74.9	42.2
4	*5965.00	105.9 AV			1.87 V	296	63.7	42.2
5	11930.00	57.8 PK	74.0	-16.2	1.75 V	194	49.2	8.6
6	11930.00	45.0 AV	54.0	-9.0	1.75 V	194	36.4	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	109.6 PK			2.49 H	304	66.3	43.3
2	*6205.00	97.7 AV			2.49 H	304	54.4	43.3
3	12410.00	57.9 PK	74.0	-16.1	1.85 H	266	49.1	8.8
4	12410.00	45.2 AV	54.0	-8.8	1.85 H	266	36.4	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	120.5 PK			1.87 V	303	77.2	43.3
2	*6205.00	109.7 AV			1.87 V	303	66.4	43.3
3	12410.00	57.7 PK	74.0	-16.3	1.69 V	205	48.9	8.8
4	12410.00	45.1 AV	54.0	-8.9	1.69 V	205	36.3	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.9 PK			2.60 H	224	63.4	44.5
2	*6405.00	96.0 AV			2.60 H	224	51.5	44.5
3	#12810.00	58.0 PK	88.2	-30.2	1.76 H	338	48.4	9.6
4	#12810.00	45.2 AV	68.2	-23.0	1.76 H	338	35.6	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	120.3 PK			1.87 V	92	75.8	44.5
2	*6405.00	108.3 AV			1.87 V	92	63.8	44.5
3	#12810.00	58.5 PK	88.2	-29.7	2.26 V	281	48.9	9.6
4	#12810.00	46.1 AV	68.2	-22.1	2.26 V	281	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	109.2 PK			2.51 H	221	64.3	44.9
2	*6565.00	97.0 AV			2.51 H	221	52.1	44.9
3	#13130.00	57.5 PK	88.2	-30.7	1.79 H	330	48.5	9.0
4	#13130.00	44.9 AV	68.2	-23.3	1.79 H	330	35.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	121.4 PK			1.80 V	90	76.5	44.9
2	*6565.00	109.3 AV			1.80 V	90	64.4	44.9
3	#13130.00	57.8 PK	88.2	-30.4	2.25 V	274	48.8	9.0
4	#13130.00	45.6 AV	68.2	-22.6	2.25 V	274	36.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	109.6 PK			2.49 H	221	64.6	45.0
2	*6685.00	97.3 AV			2.49 H	221	52.3	45.0
3	13370.00	58.5 PK	74.0	-15.5	2.52 H	194	49.0	9.5
4	13370.00	45.9 AV	54.0	-8.1	2.52 H	194	36.4	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	121.7 PK			1.82 V	98	76.7	45.0
2	*6685.00	109.6 AV			1.82 V	98	64.6	45.0
3	13370.00	58.7 PK	74.0	-15.3	1.45 V	204	49.2	9.5
4	13370.00	46.0 AV	54.0	-8.0	1.45 V	204	36.5	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	108.2 PK			2.54 H	220	62.9	45.3
2	*6845.00	95.9 AV			2.54 H	220	50.6	45.3
3	#13690.00	57.6 PK	88.2	-30.6	1.59 H	317	48.5	9.1
4	#13690.00	44.9 AV	68.2	-23.3	1.59 H	317	35.8	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	120.5 PK			1.79 V	93	75.2	45.3
2	*6845.00	108.2 AV			1.79 V	93	62.9	45.3
3	#13690.00	57.8 PK	88.2	-30.4	2.09 V	266	48.7	9.1
4	#13690.00	45.3 AV	68.2	-22.9	2.09 V	266	36.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.3 PK	88.2	-22.9	2.52 H	292	60.9	4.4
2	#5925.00	47.7 AV	68.2	-20.5	2.52 H	292	43.3	4.4
3	*5985.00	100.7 PK			2.52 H	292	58.5	42.2
4	*5985.00	87.5 AV			2.52 H	292	45.3	42.2
5	11970.00	57.2 PK	74.0	-16.8	2.12 H	149	48.6	8.6
6	11970.00	44.4 AV	54.0	-9.6	2.12 H	149	35.8	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.2 PK	88.2	-10.0	1.87 V	285	73.8	4.4
2	#5925.00	57.0 AV	68.2	-11.2	1.87 V	285	52.6	4.4
3	*5985.00	113.7 PK			1.87 V	285	71.5	42.2
4	*5985.00	100.4 AV			1.87 V	285	58.2	42.2
5	11970.00	57.2 PK	74.0	-16.8	2.36 V	114	48.6	8.6
6	11970.00	44.4 AV	54.0	-9.6	2.36 V	114	35.8	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	103.3 PK			2.58 H	226	59.9	43.4
2	*6225.00	91.2 AV			2.58 H	226	47.8	43.4
3	12450.00	56.9 PK	74.0	-17.1	1.56 H	314	48.3	8.6
4	12450.00	44.1 AV	54.0	-9.9	1.56 H	314	35.5	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	115.5 PK			1.79 V	90	72.1	43.4
2	*6225.00	103.7 AV			1.79 V	90	60.3	43.4
3	12450.00	57.2 PK	74.0	-16.8	2.23 V	279	48.6	8.6
4	12450.00	44.7 AV	54.0	-9.3	2.23 V	279	36.1	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	104.0 PK			2.55 H	216	59.6	44.4
2	*6385.00	91.7 AV			2.55 H	216	47.3	44.4
3	#12770.00	58.0 PK	88.2	-30.2	1.55 H	323	48.4	9.6
4	#12770.00	45.4 AV	68.2	-22.8	1.55 H	323	35.8	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	116.5 PK			1.78 V	87	72.1	44.4
2	*6385.00	104.0 AV			1.78 V	87	59.6	44.4
3	#12770.00	58.3 PK	88.2	-29.9	2.16 V	287	48.7	9.6
4	#12770.00	45.8 AV	68.2	-22.4	2.16 V	287	36.2	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	105.9 PK			2.57 H	218	61.0	44.9
2	*6625.00	93.2 AV			2.57 H	218	48.3	44.9
3	13250.00	58.0 PK	74.0	-16.0	1.38 H	25	48.9	9.1
4	13250.00	45.3 AV	54.0	-8.7	1.38 H	25	36.2	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	118.3 PK			1.84 V	85	73.4	44.9
2	*6625.00	105.5 AV			1.84 V	85	60.6	44.9
3	13250.00	57.7 PK	74.0	-16.3	1.64 V	258	48.6	9.1
4	13250.00	44.9 AV	54.0	-9.1	1.64 V	258	35.8	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.7 PK			2.55 H	223	60.7	45.0
2	*6705.00	93.1 AV			2.55 H	223	48.1	45.0
3	#13410.00	57.9 PK	88.2	-30.3	1.75 H	322	48.2	9.7
4	#13410.00	45.1 AV	68.2	-23.1	1.75 H	322	35.4	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	118.2 PK			1.85 V	90	73.2	45.0
2	*6705.00	105.5 AV			1.85 V	90	60.5	45.0
3	#13410.00	58.3 PK	88.2	-29.9	2.24 V	279	48.6	9.7
4	#13410.00	45.7 AV	68.2	-22.5	2.24 V	279	36.0	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	104.8 PK			2.59 H	228	59.8	45.0
2	*6785.00	92.2 AV			2.59 H	228	47.2	45.0
3	#13570.00	57.1 PK	88.2	-31.1	1.58 H	319	48.1	9.0
4	#13570.00	44.3 AV	68.2	-23.9	1.58 H	319	35.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	116.7 PK			1.75 V	92	71.7	45.0
2	*6785.00	104.4 AV			1.75 V	92	59.4	45.0
3	#13570.00	57.7 PK	88.2	-30.5	2.23 V	280	48.7	9.0
4	#13570.00	45.2 AV	68.2	-23.0	2.23 V	280	36.2	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5892.00	77.1 PK	88.2	-11.1	2.59 H	223	72.8	4.3
2	#5892.00	53.2 AV	68.2	-15.0	2.59 H	223	48.9	4.3
3	*6025.00	96.2 PK			2.59 H	223	53.9	42.3
4	*6025.00	83.7 AV			2.59 H	223	41.4	42.3
5	12050.00	56.7 PK	74.0	-17.3	1.58 H	322	48.1	8.6
6	12050.00	43.9 AV	54.0	-10.1	1.58 H	322	35.3	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5892.00	87.8 PK	88.2	-0.4	1.73 V	87	83.5	4.3
2	#5892.00	62.7 AV	68.2	-5.5	1.73 V	87	58.4	4.3
3	*6025.00	108.5 PK			1.73 V	87	66.2	42.3
4	*6025.00	96.0 AV			1.73 V	87	53.7	42.3
5	12050.00	57.1 PK	74.0	-16.9	2.23 V	289	48.5	8.6
6	12050.00	44.7 AV	54.0	-9.3	2.23 V	289	36.1	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	96.7 PK			2.54 H	221	53.5	43.2
2	*6185.00	84.2 AV			2.54 H	221	41.0	43.2
3	12370.00	57.2 PK	74.0	-16.8	1.30 H	155	48.4	8.8
4	12370.00	44.4 AV	54.0	-9.6	1.30 H	155	35.6	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.9 PK			1.65 V	82	65.7	43.2
2	*6185.00	96.4 AV			1.65 V	82	53.2	43.2
3	12370.00	57.8 PK	74.0	-16.2	1.35 V	281	49.0	8.8
4	12370.00	45.0 AV	54.0	-9.0	1.35 V	281	36.2	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	98.3 PK			2.64 H	253	54.1	44.2
2	*6345.00	85.8 AV			2.64 H	253	41.6	44.2
3	12690.00	58.0 PK	74.0	-16.0	1.64 H	252	48.4	9.6
4	12690.00	45.2 AV	54.0	-8.8	1.64 H	252	35.6	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.6 PK			1.65 V	83	66.4	44.2
2	*6345.00	98.1 AV			1.65 V	83	53.9	44.2
3	12690.00	58.1 PK	74.0	-15.9	1.16 V	246	48.5	9.6
4	12690.00	45.4 AV	54.0	-8.6	1.16 V	246	35.8	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	96.8 PK			2.53 H	230	51.8	45.0
2	*6665.00	84.2 AV			2.53 H	230	39.2	45.0
3	13330.00	57.0 PK	74.0	-17.0	1.67 H	332	47.8	9.2
4	13330.00	44.4 AV	54.0	-9.6	1.67 H	332	35.2	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.3 PK			1.77 V	88	64.3	45.0
2	*6665.00	96.6 AV			1.77 V	88	51.6	45.0
3	13330.00	57.6 PK	74.0	-16.4	2.19 V	285	48.4	9.2
4	13330.00	45.2 AV	54.0	-8.8	2.19 V	285	36.0	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Partial RU_2TX

26-tone RU

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.1 PK	88.2	-29.1	2.52 H	292	54.7	4.4
2	#5925.00	46.2 AV	68.2	-22.0	2.52 H	292	41.8	4.4
3	*5955.00	109.6 PK			2.52 H	292	67.4	42.2
4	*5955.00	96.5 AV			2.52 H	292	54.3	42.2
5	11910.00	57.3 PK	74.0	-16.7	1.53 H	229	48.7	8.6
6	11910.00	44.6 AV	54.0	-9.4	1.53 H	229	36.0	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.8 PK	88.2	-28.4	1.87 V	296	55.4	4.4
2	#5925.00	48.7 AV	68.2	-19.5	1.87 V	296	44.3	4.4
3	*5955.00	122.3 PK			1.87 V	296	80.1	42.2
4	*5955.00	109.8 AV			1.87 V	296	67.6	42.2
5	11910.00	57.8 PK	74.0	-16.2	1.92 V	242	49.2	8.6
6	11910.00	45.0 AV	54.0	-9.0	1.92 V	242	36.4	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.1 PK			2.58 H	226	64.9	43.2
2	*6195.00	96.9 AV			2.58 H	226	53.7	43.2
3	12390.00	57.8 PK	74.0	-16.2	1.71 H	320	48.9	8.9
4	12390.00	45.2 AV	54.0	-8.8	1.71 H	320	36.3	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.0 PK			1.74 V	85	77.8	43.2
2	*6195.00	109.3 AV			1.74 V	85	66.1	43.2
3	12390.00	58.2 PK	74.0	-15.8	2.18 V	283	49.3	8.9
4	12390.00	45.6 AV	54.0	-8.4	2.18 V	283	36.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.6 PK			2.56 H	220	64.0	44.6
2	*6415.00	97.4 AV			2.56 H	220	52.8	44.6
3	#12830.00	58.3 PK	88.2	-29.9	1.69 H	317	48.8	9.5
4	#12830.00	45.8 AV	68.2	-22.4	1.69 H	317	36.3	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.0 PK			1.81 V	90	76.4	44.6
2	*6415.00	109.8 AV			1.81 V	90	65.2	44.6
3	#12830.00	58.7 PK	88.2	-29.5	2.27 V	284	49.2	9.5
4	#12830.00	46.1 AV	68.2	-22.1	2.27 V	284	36.6	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.1 PK			2.49 H	224	65.2	44.9
2	*6535.00	98.6 AV			2.49 H	224	53.7	44.9
3	#13070.00	57.3 PK	88.2	-30.9	1.29 H	226	48.3	9.0
4	#13070.00	44.6 AV	68.2	-23.6	1.29 H	226	35.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.3 PK			1.78 V	81	77.4	44.9
2	*6535.00	111.2 AV			1.78 V	81	66.3	44.9
3	#13070.00	57.7 PK	88.2	-30.5	2.93 V	115	48.7	9.0
4	#13070.00	44.9 AV	68.2	-23.3	2.93 V	115	35.9	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.1 PK			2.53 H	224	65.1	45.0
2	*6695.00	98.7 AV			2.53 H	224	53.7	45.0
3	13390.00	58.2 PK	74.0	-15.8	1.68 H	331	48.6	9.6
4	13390.00	45.6 AV	54.0	-8.4	1.68 H	331	36.0	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			1.84 V	87	77.3	45.0
2	*6695.00	111.1 AV			1.84 V	87	66.1	45.0
3	13390.00	58.8 PK	74.0	-15.2	2.14 V	273	49.2	9.6
4	13390.00	46.2 AV	54.0	-7.8	2.14 V	273	36.6	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.6 PK			2.54 H	228	65.3	45.3
2	*6855.00	99.2 AV			2.54 H	228	53.9	45.3
3	#13710.00	57.5 PK	88.2	-30.7	1.82 H	204	48.5	9.0
4	#13710.00	44.7 AV	68.2	-23.5	1.82 H	204	35.7	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.9 PK			1.82 V	96	77.6	45.3
2	*6855.00	111.7 AV			1.82 V	96	66.4	45.3
3	#13710.00	57.1 PK	88.2	-31.1	2.05 V	171	48.1	9.0
4	#13710.00	44.4 AV	68.2	-23.8	2.05 V	171	35.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

52-tone RU

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.7 PK	88.2	-29.5	2.52 H	292	54.3	4.4
2	#5925.00	46.1 AV	68.2	-22.1	2.52 H	292	41.7	4.4
3	*5955.00	109.9 PK			2.52 H	292	67.7	42.2
4	*5955.00	97.4 AV			2.52 H	292	55.2	42.2
5	11910.00	57.2 PK	74.0	-16.8	1.62 H	308	48.6	8.6
6	11910.00	44.5 AV	54.0	-9.5	1.62 H	308	35.9	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.2 PK	88.2	-22.0	1.87 V	296	61.8	4.4
2	#5925.00	48.9 AV	68.2	-19.3	1.87 V	296	44.5	4.4
3	*5955.00	122.5 PK			1.87 V	296	80.3	42.2
4	*5955.00	110.5 AV			1.87 V	296	68.3	42.2
5	11910.00	57.8 PK	74.0	-16.2	2.84 V	116	49.2	8.6
6	11910.00	45.1 AV	54.0	-8.9	2.84 V	116	36.5	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.6 PK			2.61 H	224	65.4	43.2
2	*6195.00	97.0 AV			2.61 H	224	53.8	43.2
3	12390.00	57.7 PK	74.0	-16.3	1.70 H	314	48.8	8.9
4	12390.00	45.2 AV	54.0	-8.8	1.70 H	314	36.3	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.1 PK			1.72 V	87	77.9	43.2
2	*6195.00	109.5 AV			1.72 V	87	66.3	43.2
3	12390.00	58.1 PK	74.0	-15.9	2.27 V	281	49.2	8.9
4	12390.00	45.6 AV	54.0	-8.4	2.27 V	281	36.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.7 PK			2.56 H	220	64.1	44.6
2	*6415.00	97.6 AV			2.56 H	220	53.0	44.6
3	#12830.00	57.8 PK	88.2	-30.4	1.96 H	112	48.3	9.5
4	#12830.00	45.0 AV	68.2	-23.2	1.96 H	112	35.5	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.2 PK			1.81 V	90	76.6	44.6
2	*6415.00	110.0 AV			1.81 V	90	65.4	44.6
3	#12830.00	58.3 PK	88.2	-29.9	2.27 V	284	48.8	9.5
4	#12830.00	45.6 AV	68.2	-22.6	2.27 V	284	36.1	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.3 PK			2.49 H	224	65.4	44.9
2	*6535.00	98.8 AV			2.49 H	224	53.9	44.9
3	#13070.00	57.0 PK	88.2	-31.2	1.29 H	226	48.0	9.0
4	#13070.00	44.3 AV	68.2	-23.9	1.29 H	226	35.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.6 PK			1.78 V	81	77.7	44.9
2	*6535.00	111.6 AV			1.78 V	81	66.7	44.9
3	#13070.00	57.3 PK	88.2	-30.9	2.93 V	115	48.3	9.0
4	#13070.00	44.5 AV	68.2	-23.7	2.93 V	115	35.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.8 PK			2.52 H	225	65.8	45.0
2	*6695.00	99.2 AV			2.52 H	225	54.2	45.0
3	13390.00	58.1 PK	74.0	-15.9	1.66 H	327	48.5	9.6
4	13390.00	45.5 AV	54.0	-8.5	1.66 H	327	35.9	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	124.1 PK			1.85 V	89	79.1	45.0
2	*6695.00	111.6 AV			1.85 V	89	66.6	45.0
3	13390.00	58.6 PK	74.0	-15.4	2.18 V	288	49.0	9.6
4	13390.00	46.1 AV	54.0	-7.9	2.18 V	288	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.1 PK			2.54 H	228	65.8	45.3
2	*6855.00	99.7 AV			2.54 H	228	54.4	45.3
3	#13710.00	57.8 PK	88.2	-30.4	1.82 H	204	48.8	9.0
4	#13710.00	45.0 AV	68.2	-23.2	1.82 H	204	36.0	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	123.3 PK			1.82 V	96	78.0	45.3
2	*6855.00	112.0 AV			1.82 V	96	66.7	45.3
3	#13710.00	57.4 PK	88.2	-30.8	2.05 V	171	48.4	9.0
4	#13710.00	44.7 AV	68.2	-23.5	2.05 V	171	35.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

106-tone RU

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.5 PK	88.2	-15.7	2.54 H	229	68.1	4.4
2	#5925.00	47.6 AV	68.2	-20.6	2.54 H	229	43.2	4.4
3	*5955.00	110.5 PK			2.54 H	229	68.3	42.2
4	*5955.00	98.7 AV			2.54 H	229	56.5	42.2
5	11910.00	57.5 PK	74.0	-16.5	1.69 H	321	48.9	8.6
6	11910.00	44.9 AV	54.0	-9.1	1.69 H	321	36.3	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.7 PK	88.2	-3.5	2.26 V	279	80.3	4.4
2	#5925.00	52.1 AV	68.2	-16.1	2.26 V	279	47.7	4.4
3	*5955.00	122.6 PK			1.78 V	89	80.4	42.2
4	*5955.00	111.0 AV			1.78 V	89	68.8	42.2
5	11910.00	58.2 PK	74.0	-15.8	2.26 V	279	49.6	8.6
6	11910.00	45.5 AV	54.0	-8.5	2.26 V	279	36.9	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.4 PK			2.61 H	224	65.2	43.2
2	*6195.00	96.8 AV			2.61 H	224	53.6	43.2
3	12390.00	57.4 PK	74.0	-16.6	1.04 H	278	48.5	8.9
4	12390.00	44.8 AV	54.0	-9.2	1.04 H	278	35.9	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.0 PK			1.72 V	87	77.8	43.2
2	*6195.00	109.4 AV			1.72 V	87	66.2	43.2
3	12390.00	57.6 PK	74.0	-16.4	2.27 V	281	48.7	8.9
4	12390.00	44.8 AV	54.0	-9.2	2.27 V	281	35.9	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.9 PK			2.57 H	218	66.3	44.6
2	*6415.00	99.2 AV			2.57 H	218	54.6	44.6
3	#12830.00	58.1 PK	88.2	-30.1	1.72 H	315	48.6	9.5
4	#12830.00	45.7 AV	68.2	-22.5	1.72 H	315	36.2	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.5 PK			1.83 V	90	78.9	44.6
2	*6415.00	111.7 AV			1.83 V	90	67.1	44.6
3	#12830.00	58.6 PK	88.2	-29.6	2.28 V	287	49.1	9.5
4	#12830.00	45.9 AV	68.2	-22.3	2.28 V	287	36.4	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.5 PK			2.49 H	224	65.6	44.9
2	*6535.00	99.0 AV			2.49 H	224	54.1	44.9
3	#13070.00	57.2 PK	88.2	-31.0	1.29 H	226	48.2	9.0
4	#13070.00	44.4 AV	68.2	-23.8	1.29 H	226	35.4	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.8 PK			1.78 V	81	77.9	44.9
2	*6535.00	111.9 AV			1.78 V	81	67.0	44.9
3	#13070.00	57.4 PK	88.2	-30.8	2.93 V	115	48.4	9.0
4	#13070.00	44.7 AV	68.2	-23.5	2.93 V	115	35.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.1 PK			2.51 H	232	67.1	45.0
2	*6695.00	99.7 AV			2.51 H	232	54.7	45.0
3	13390.00	58.1 PK	74.0	-15.9	1.67 H	331	48.5	9.6
4	13390.00	45.7 AV	54.0	-8.3	1.67 H	331	36.1	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	124.5 PK			1.82 V	91	79.5	45.0
2	*6695.00	112.2 AV			1.82 V	91	67.2	45.0
3	13390.00	58.7 PK	74.0	-15.3	2.12 V	279	49.1	9.6
4	13390.00	46.2 AV	54.0	-7.8	2.12 V	279	36.6	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.9 PK			2.51 H	226	66.6	45.3
2	*6855.00	100.0 AV			2.51 H	226	54.7	45.3
3	#13710.00	57.6 PK	88.2	-30.6	1.79 H	332	48.6	9.0
4	#13710.00	45.1 AV	68.2	-23.1	1.79 H	332	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	124.1 PK			1.73 V	92	78.8	45.3
2	*6855.00	112.4 AV			1.73 V	92	67.1	45.3
3	#13710.00	58.0 PK	88.2	-30.2	2.18 V	293	49.0	9.0
4	#13710.00	45.5 AV	68.2	-22.7	2.18 V	293	36.5	9.0


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge
standard power AP
Mode A
1TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

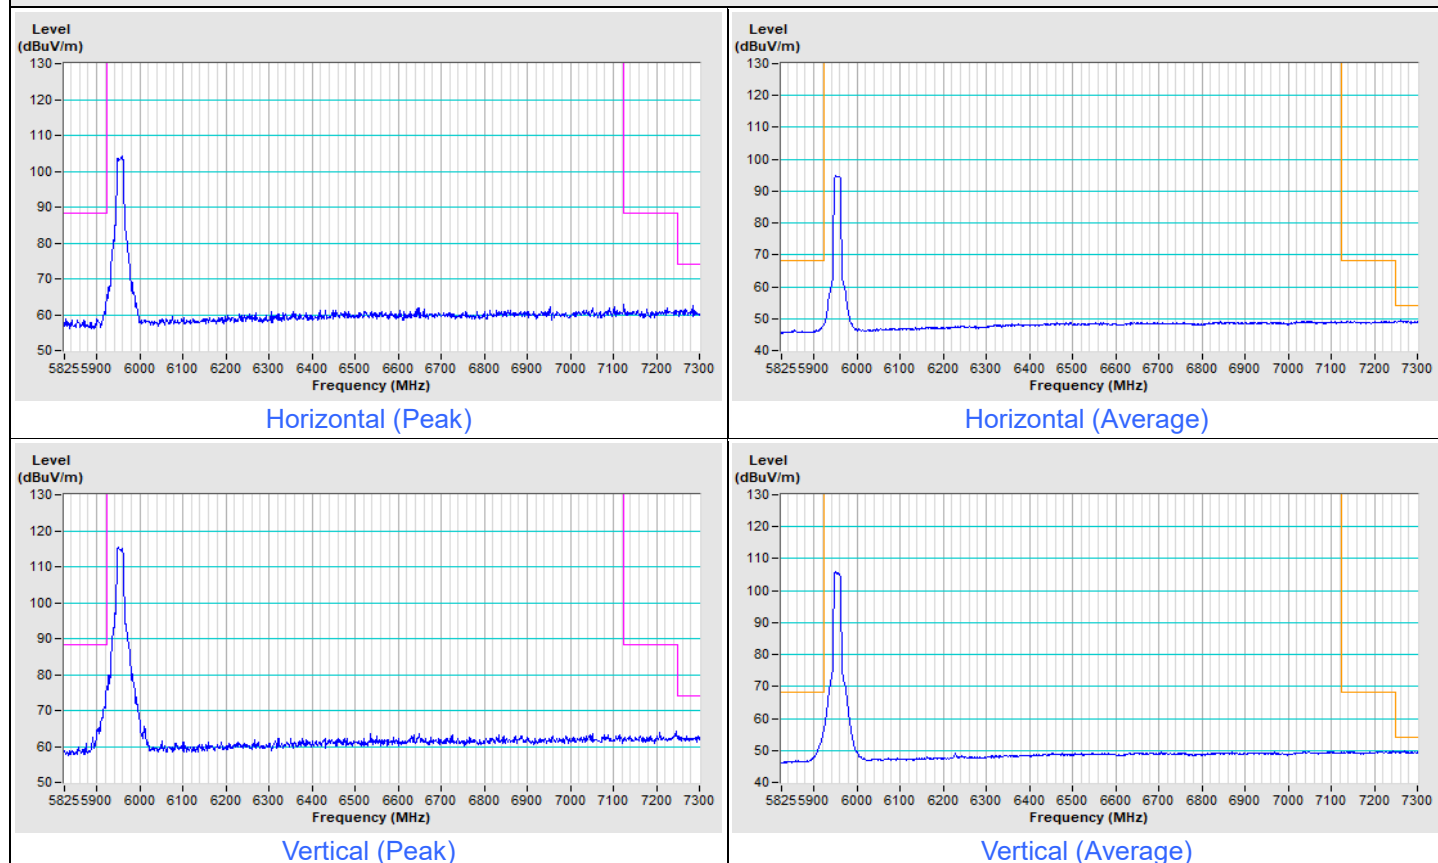


802.11be (EHT20) Channel 1

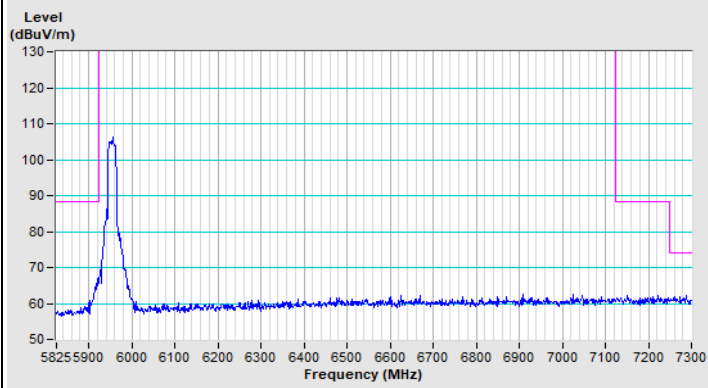


Horizontal (Peak)

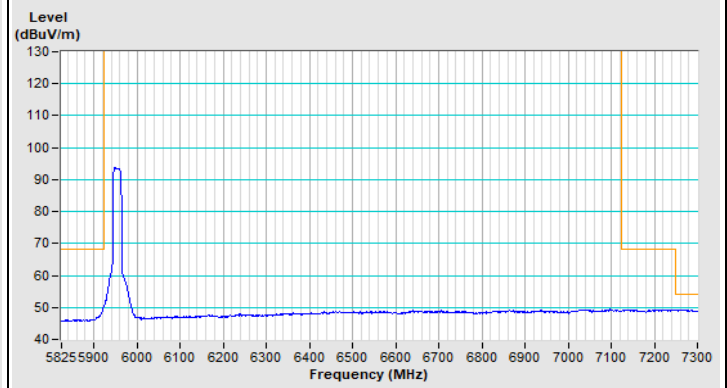

Horizontal (Average)

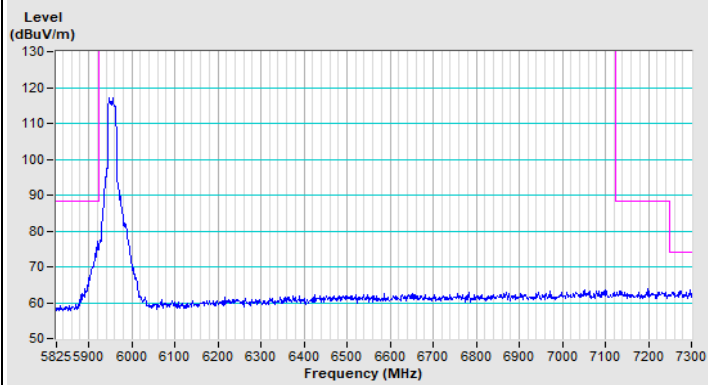


Vertical (Peak)

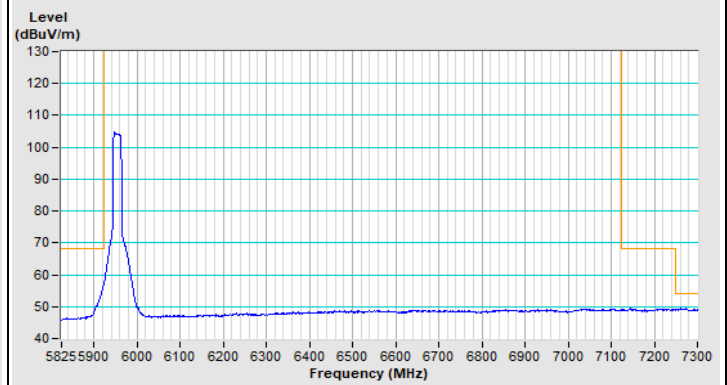


Vertical (Average)


802.11be (EHT40) Channel 3

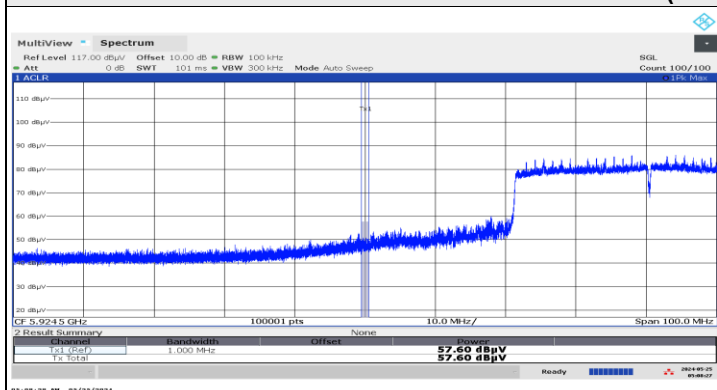


Horizontal (Peak)

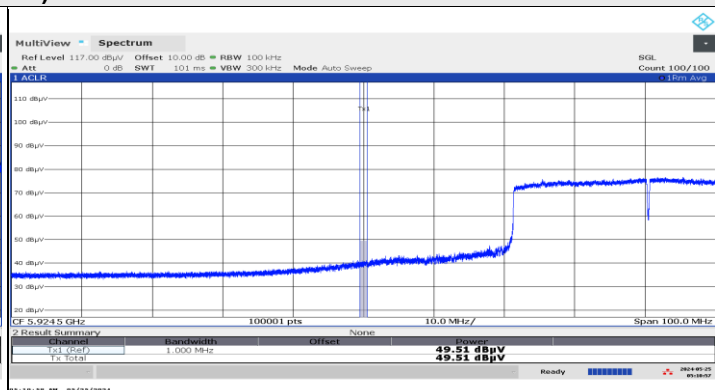

Horizontal (Average)

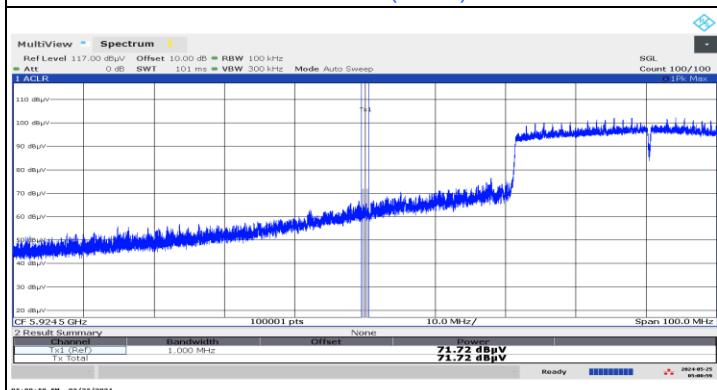


Vertical (Peak)

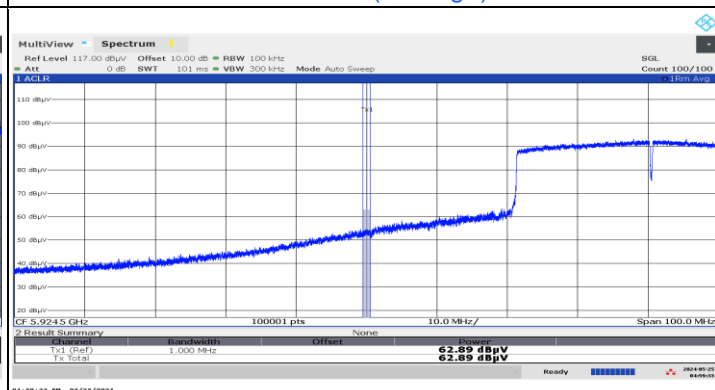


Vertical (Average)


802.11be (EHT80) Channel 7

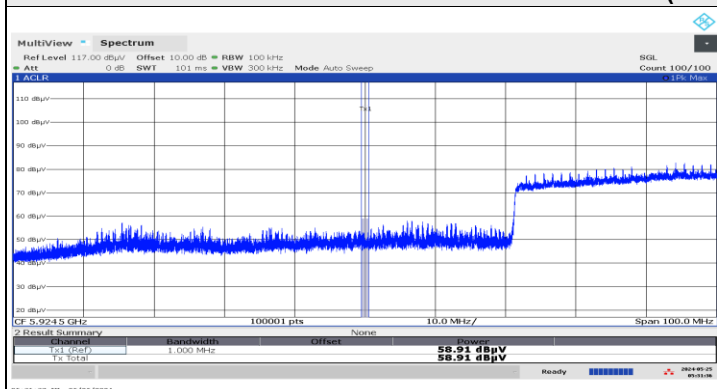


Horizontal (Peak)

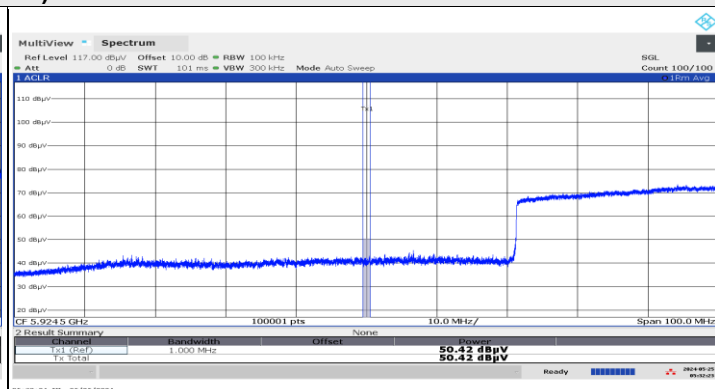

Horizontal (Average)

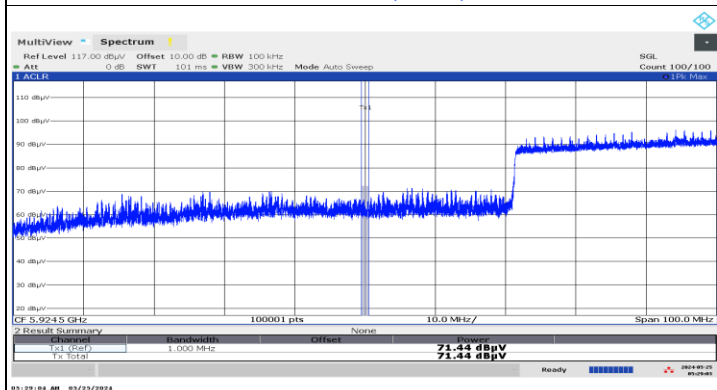


Vertical (Peak)

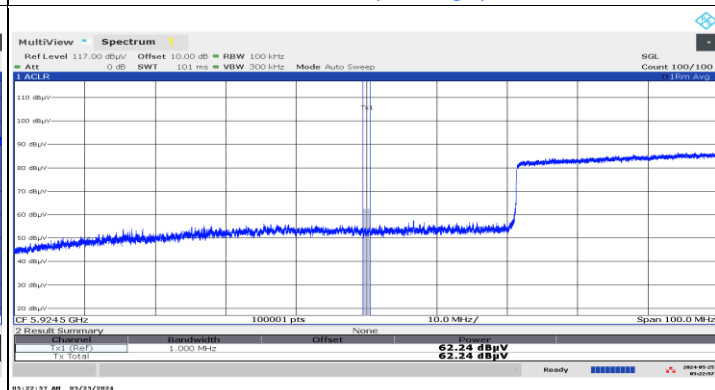

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

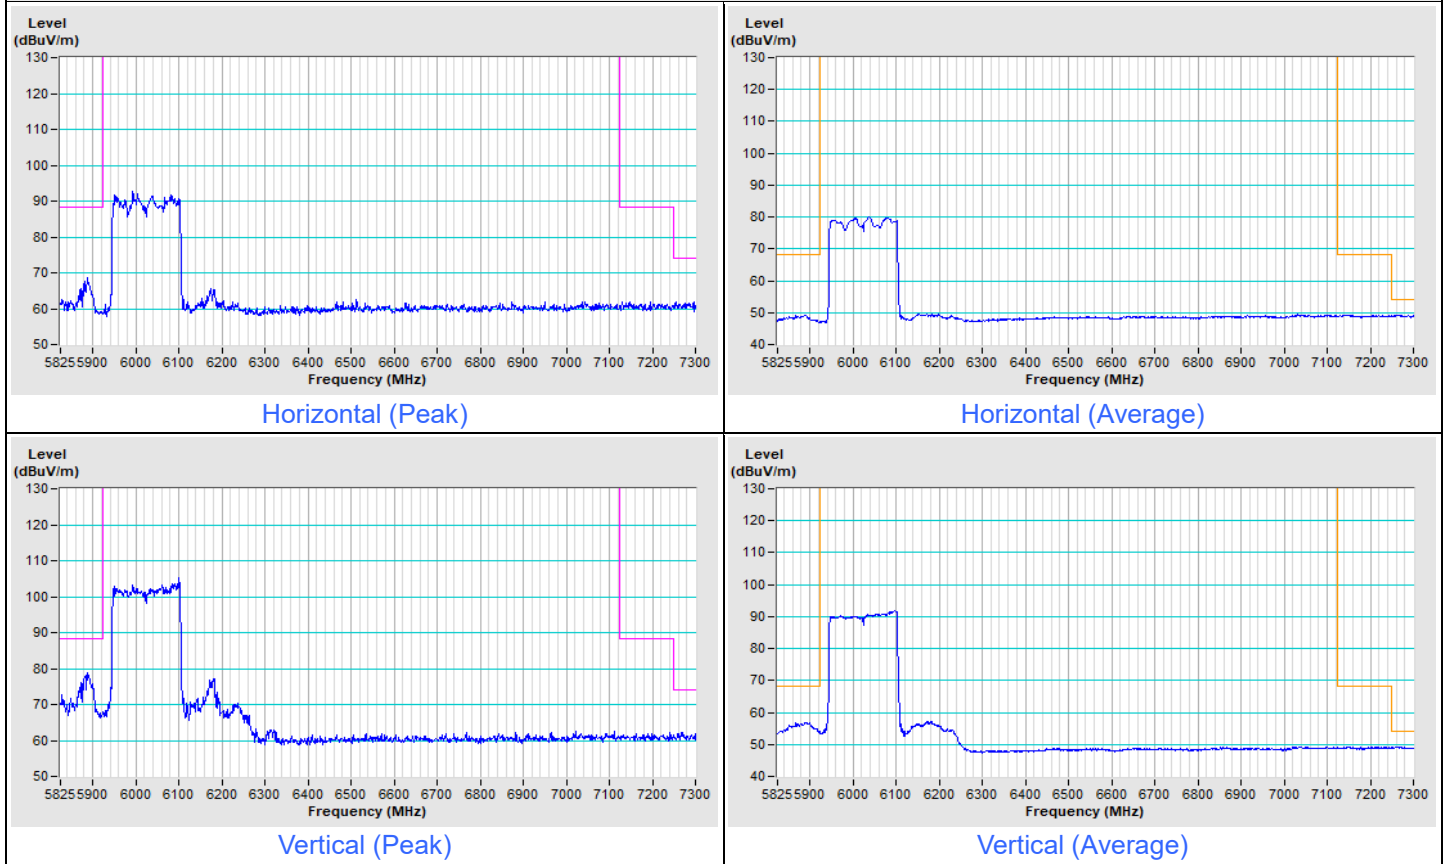


2TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

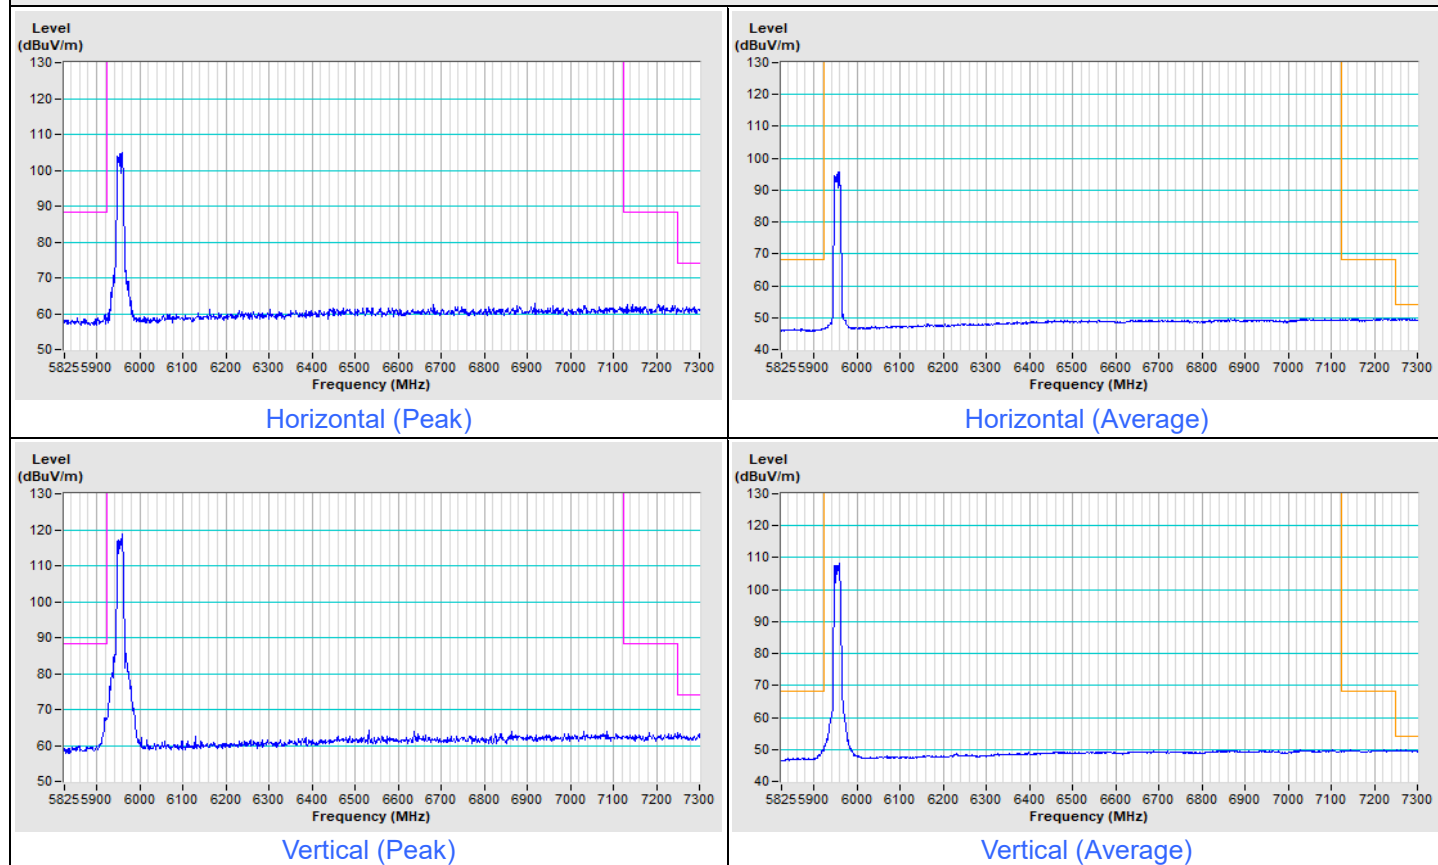


802.11be (EHT20) Channel 1

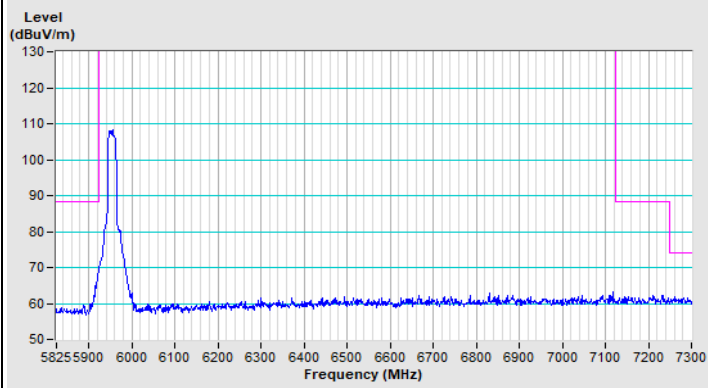


Horizontal (Peak)

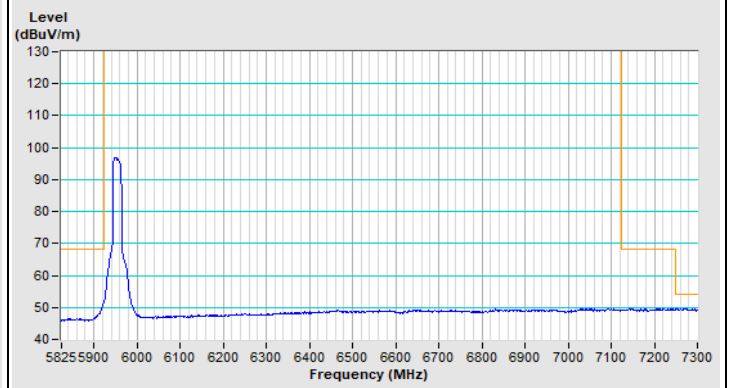

Horizontal (Average)

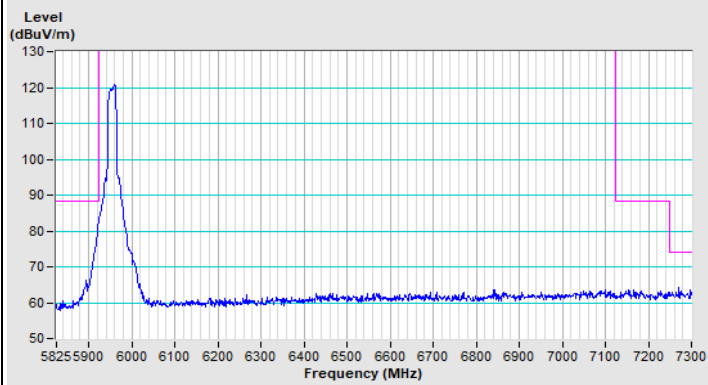


Vertical (Peak)

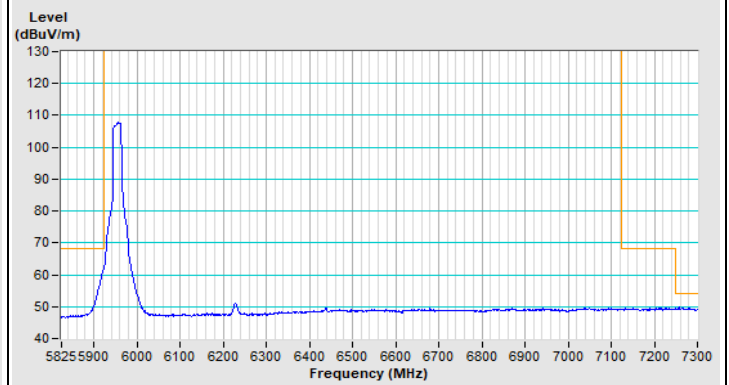

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 3

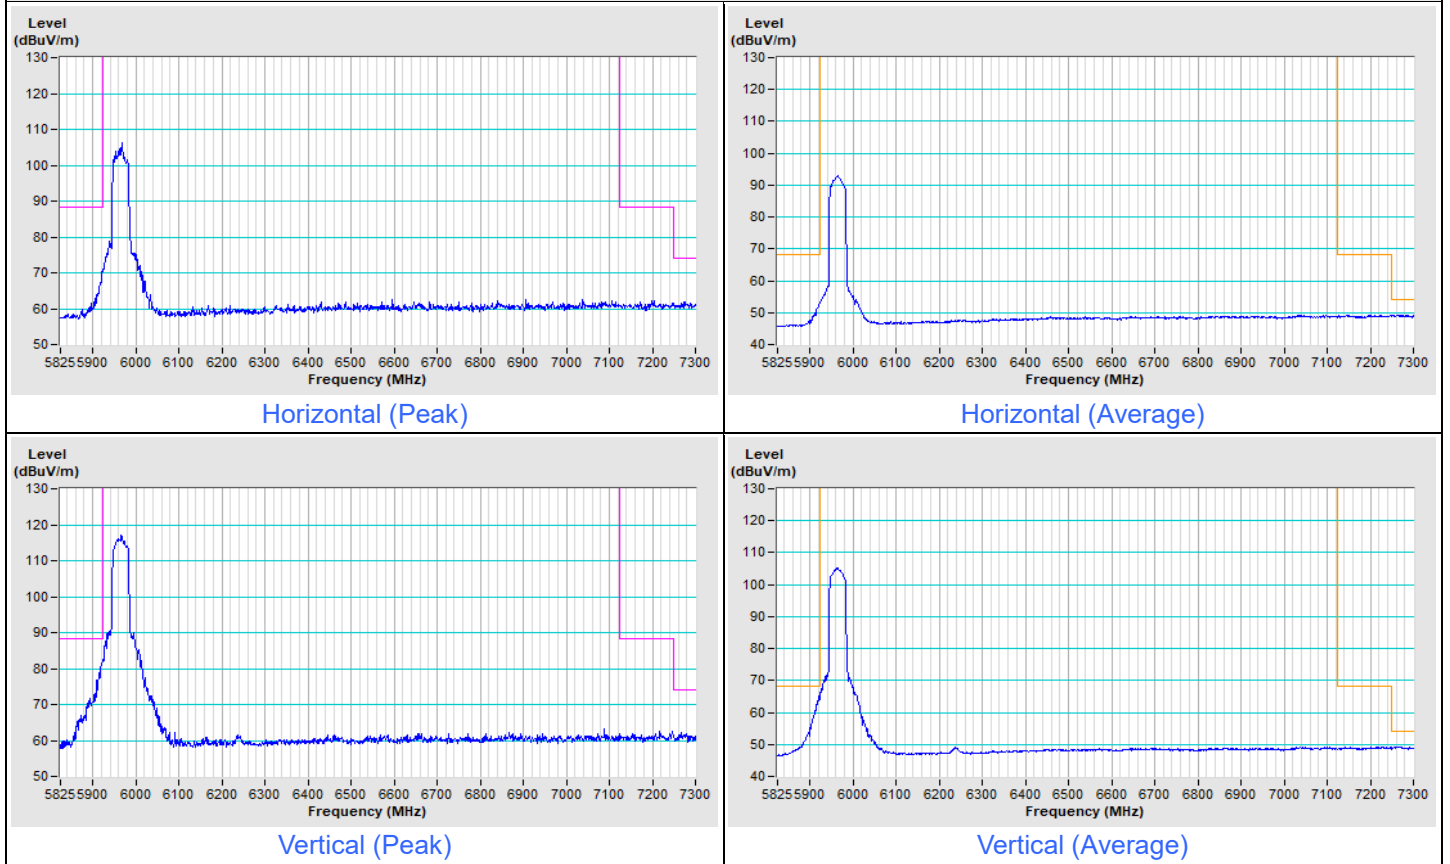


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

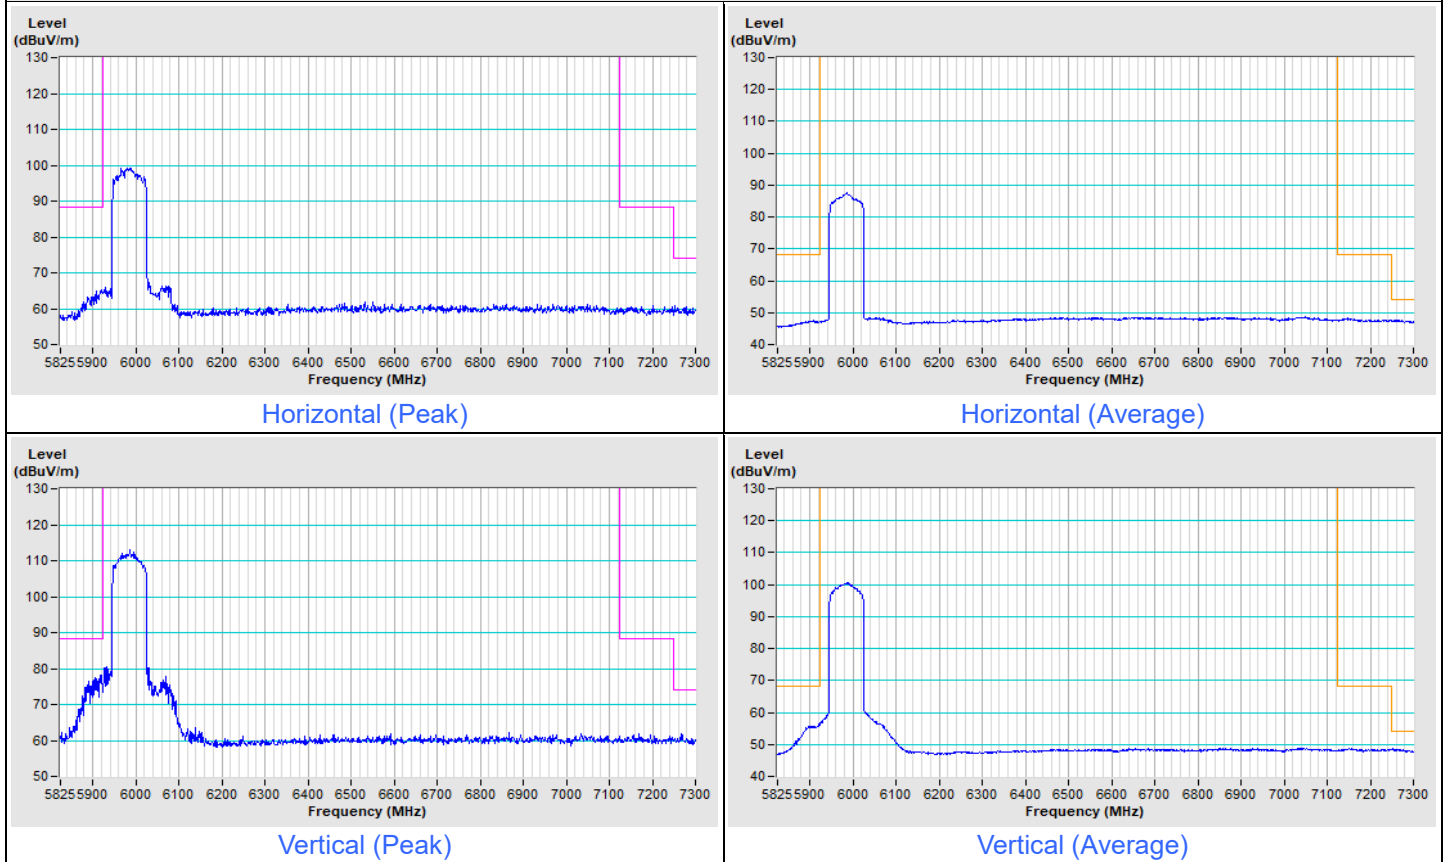

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

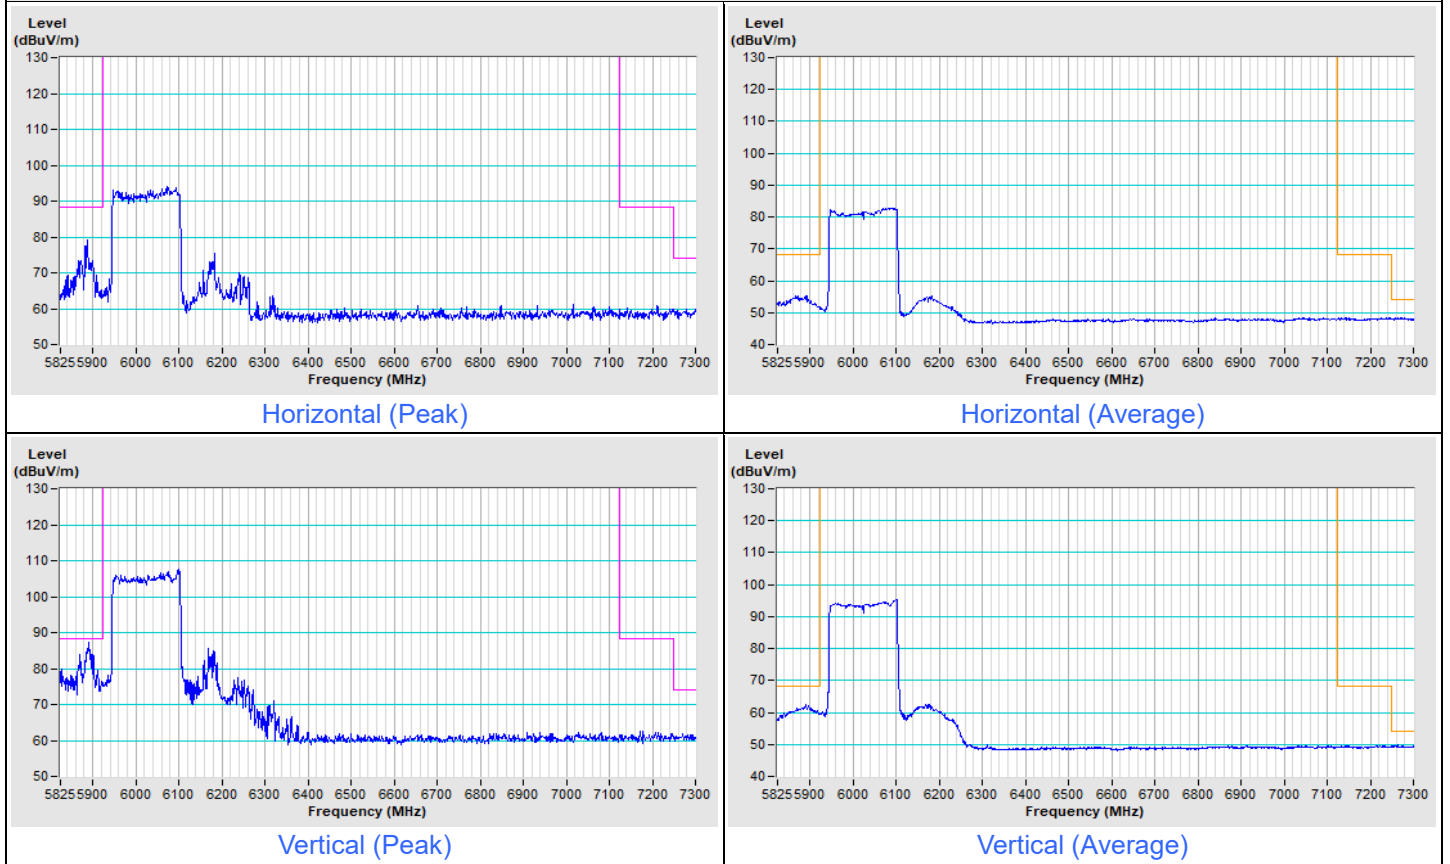


Partial RU_1TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

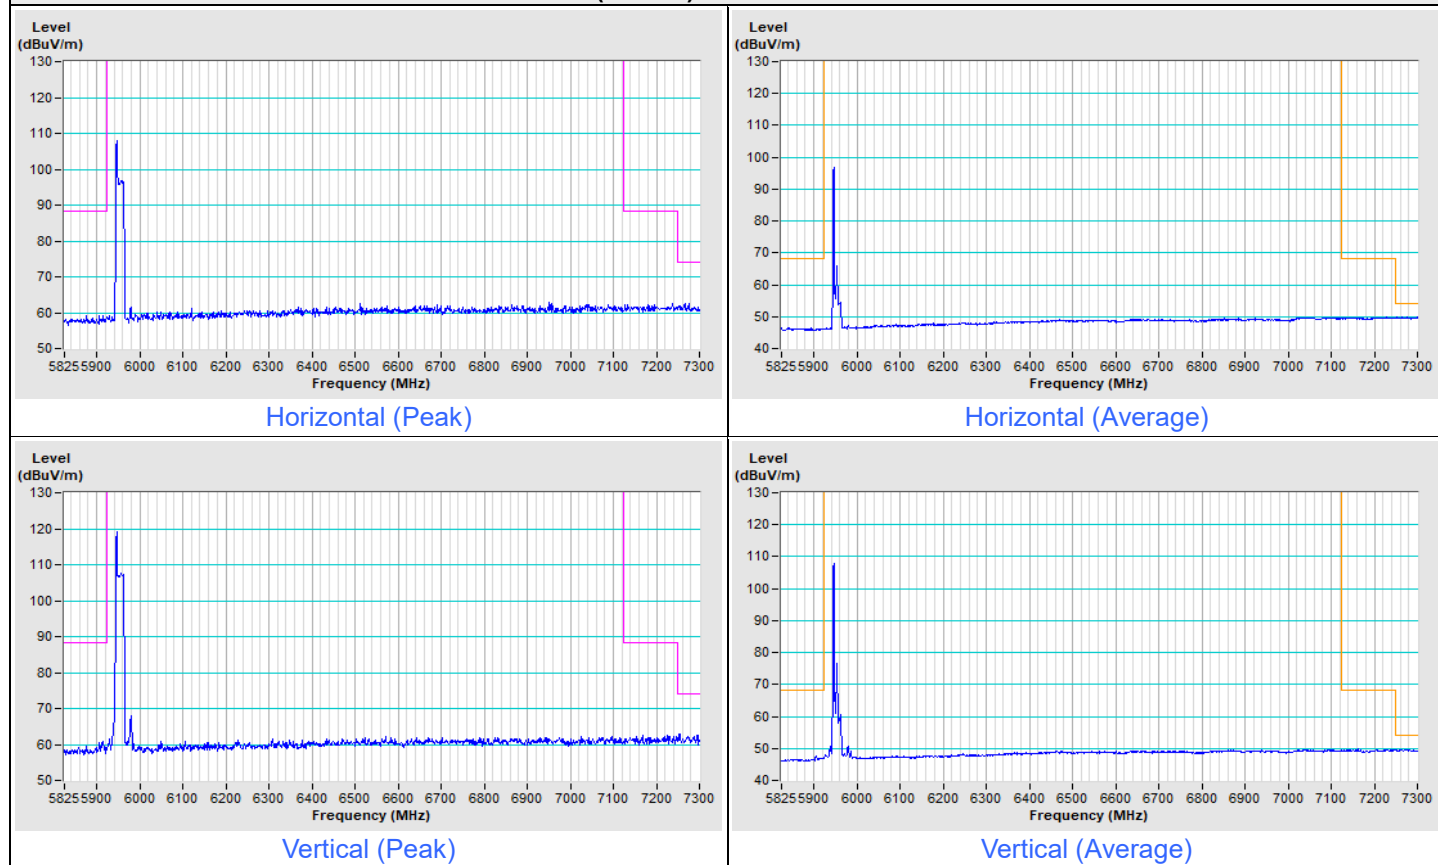


802.11be (EHT20) 52-tone RU Channel 1

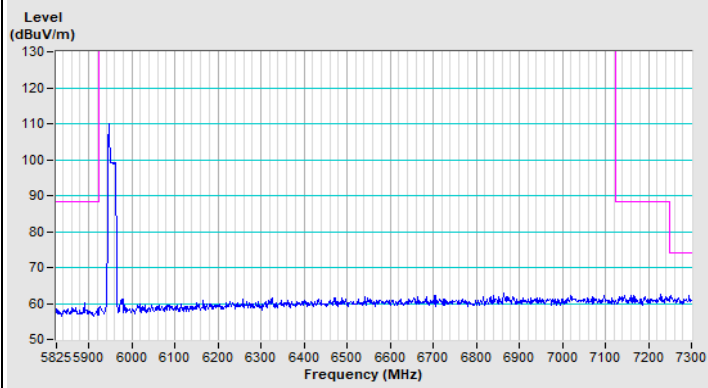


Horizontal (Peak)

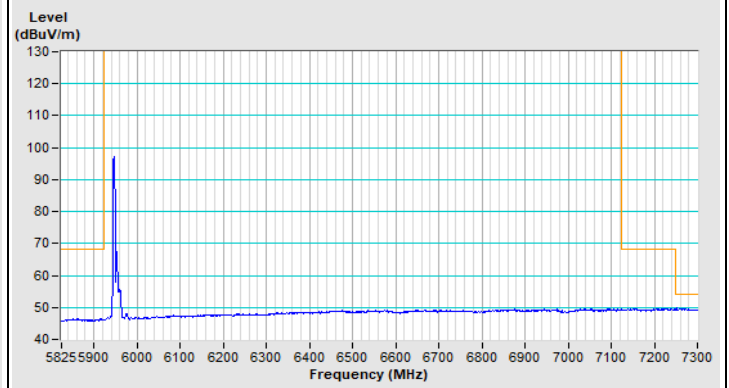

Horizontal (Average)

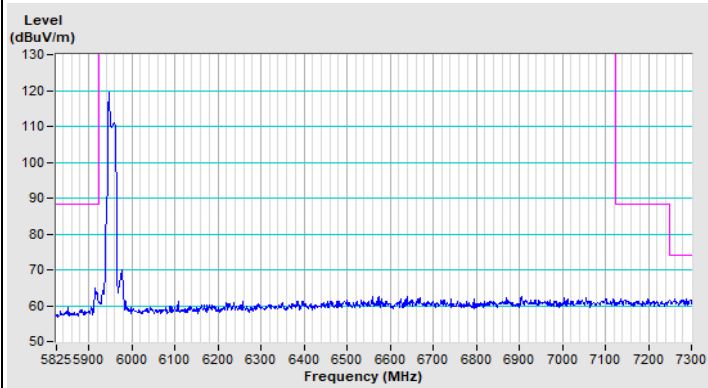


Vertical (Peak)

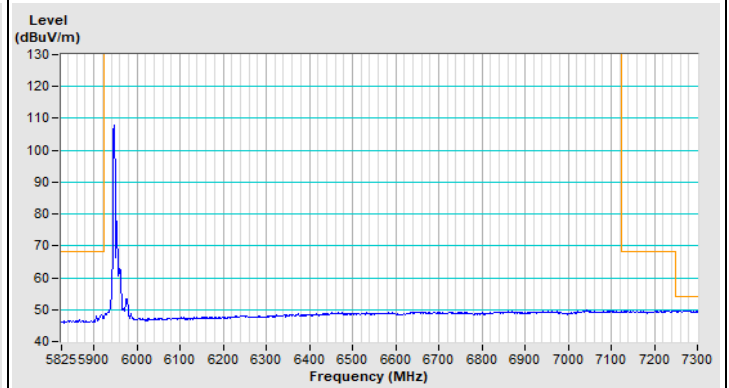

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

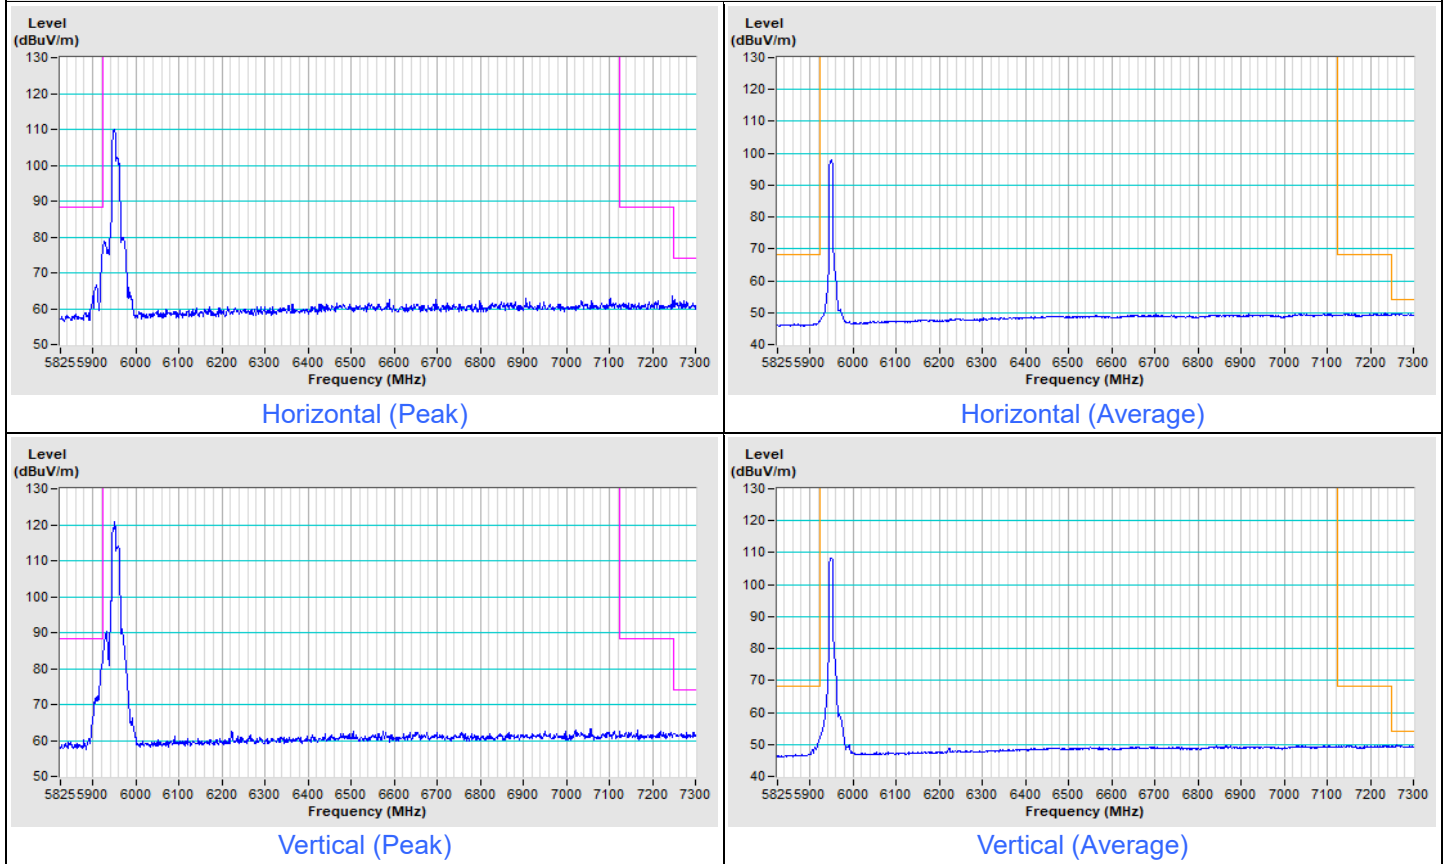


Partial RU_2TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

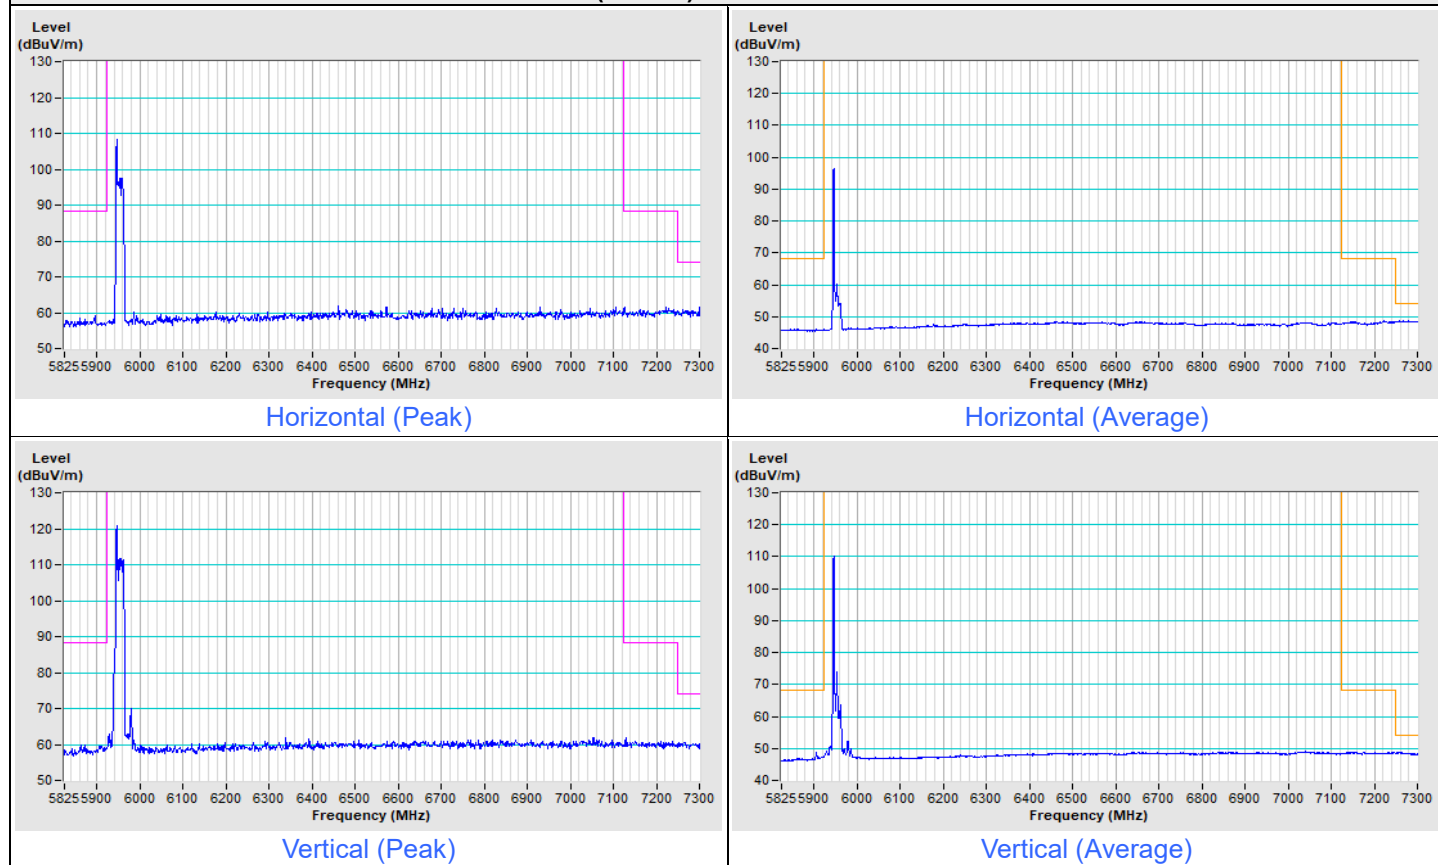


802.11be (EHT20) 52-tone RU Channel 1

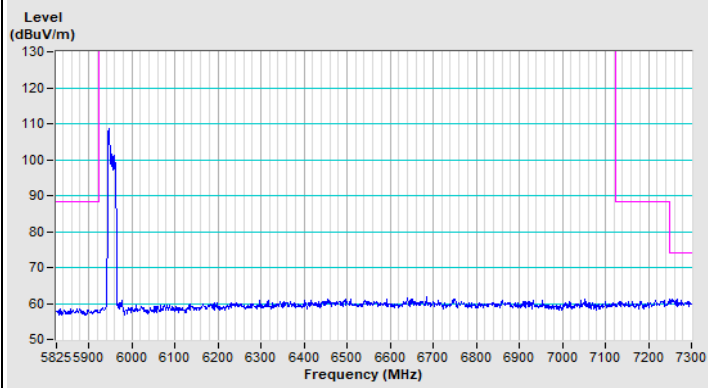


Horizontal (Peak)

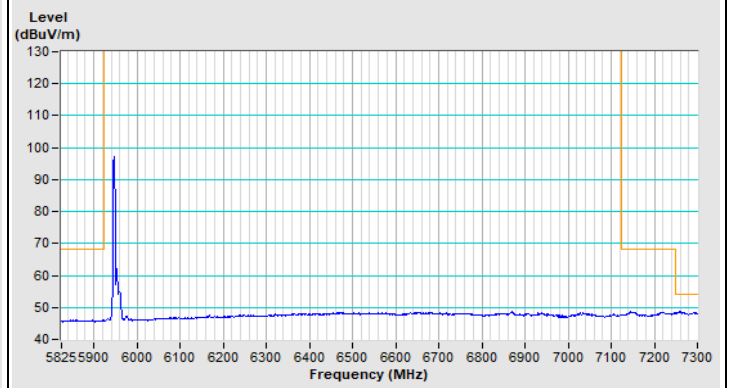

Horizontal (Average)

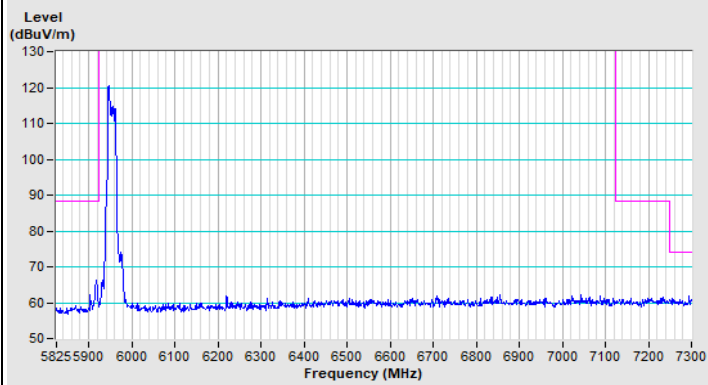


Vertical (Peak)

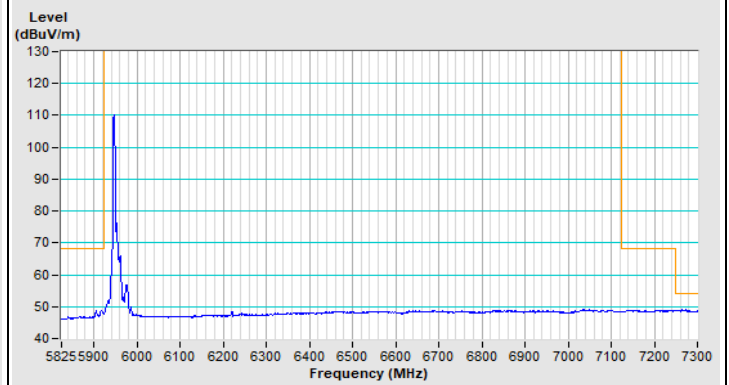

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

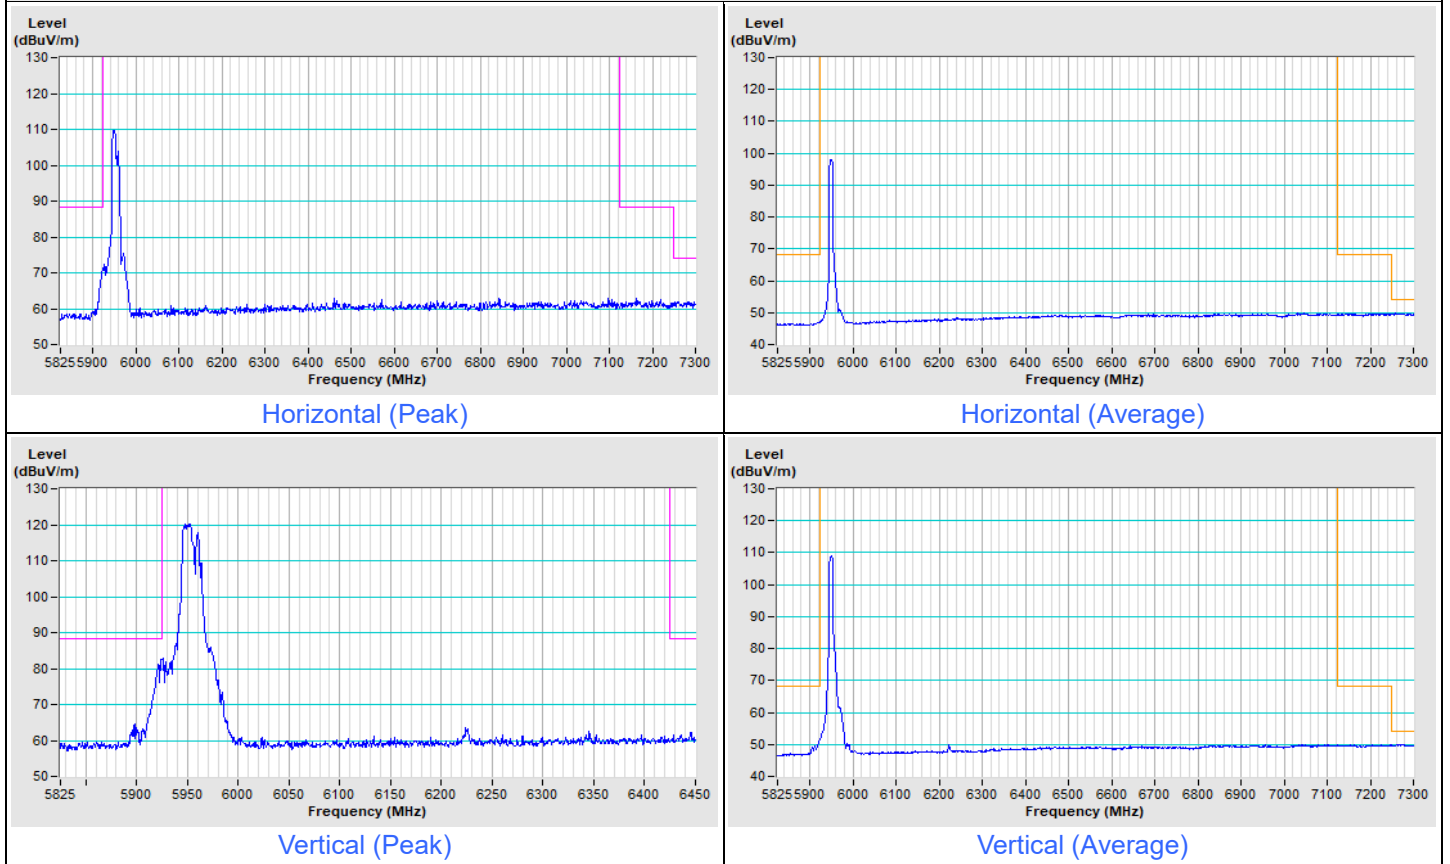

Mode B

under control of low power indoor AP

1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.2 PK	88.2	-16.0	3.77 H	293	67.8	4.4
2	#5925.00	53.6 AV	68.2	-14.6	3.77 H	293	49.2	4.4
3	*5955.00	113.1 PK			3.77 H	293	70.9	42.2
4	*5955.00	103.5 AV			3.77 H	293	61.3	42.2
5	11910.00	57.6 PK	74.0	-16.4	1.68 H	256	49.0	8.6
6	11910.00	44.1 AV	54.0	-9.9	1.68 H	256	35.5	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.8 PK	88.2	-12.4	1.30 V	146	71.4	4.4
2	#5925.00	55.2 AV	68.2	-13.0	1.30 V	146	50.8	4.4
3	*5955.00	117.1 PK			1.30 V	146	74.9	42.2
4	*5955.00	107.3 AV			1.30 V	146	65.1	42.2
5	11910.00	57.5 PK	74.0	-16.5	1.36 V	309	48.9	8.6
6	11910.00	44.1 AV	54.0	-9.9	1.36 V	309	35.5	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	112.9 PK			2.28 H	315	69.7	43.2
2	*6195.00	103.1 AV			2.28 H	315	59.9	43.2
3	12390.00	58.3 PK	74.0	-15.7	1.61 H	258	49.4	8.9
4	12390.00	44.5 AV	54.0	-9.5	1.61 H	258	35.6	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.0 PK			1.20 V	149	72.8	43.2
2	*6195.00	106.0 AV			1.20 V	149	62.8	43.2
3	12390.00	58.0 PK	74.0	-16.0	1.35 V	301	49.1	8.9
4	12390.00	45.5 AV	54.0	-8.5	1.35 V	301	36.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.3 PK			2.30 H	315	68.7	44.6
2	*6415.00	103.4 AV			2.30 H	315	58.8	44.6
3	#12830.00	58.0 PK	88.2	-30.2	1.05 H	219	48.5	9.5
4	#12830.00	45.4 AV	68.2	-22.8	1.05 H	219	35.9	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.6 PK			1.06 V	130	72.0	44.6
2	*6415.00	106.6 AV			1.06 V	130	62.0	44.6
3	#12830.00	58.3 PK	88.2	-29.9	1.51 V	111	48.8	9.5
4	#12830.00	45.7 AV	68.2	-22.5	1.51 V	111	36.2	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.1 PK			2.65 H	300	57.3	44.8
2	*6435.00	92.4 AV			2.65 H	300	47.6	44.8
3	#12870.00	56.7 PK	88.2	-31.5	1.67 H	280	47.3	9.4
4	#12870.00	44.3 AV	68.2	-23.9	1.67 H	280	34.9	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.0 PK			1.03 V	144	56.2	44.8
2	*6435.00	91.1 AV			1.03 V	144	46.3	44.8
3	#12870.00	56.4 PK	88.2	-31.8	1.33 V	301	47.0	9.4
4	#12870.00	44.0 AV	68.2	-24.2	1.33 V	301	34.6	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.8 PK			2.65 H	300	57.9	44.9
2	*6475.00	92.1 AV			2.65 H	300	47.2	44.9
3	#12950.00	57.1 PK	88.2	-31.1	1.65 H	190	47.9	9.2
4	#12950.00	44.6 AV	68.2	-23.6	1.65 H	190	35.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.3 PK			1.03 V	145	56.4	44.9
2	*6475.00	91.2 AV			1.03 V	145	46.3	44.9
3	#12950.00	56.6 PK	88.2	-31.6	1.05 V	187	47.4	9.2
4	#12950.00	44.3 AV	68.2	-23.9	1.05 V	187	35.1	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.3 PK			2.65 H	298	57.3	45.0
2	*6515.00	91.6 AV			2.65 H	298	46.6	45.0
3	#13030.00	56.6 PK	88.2	-31.6	1.65 H	279	47.7	8.9
4	#13030.00	44.2 AV	68.2	-24.0	1.65 H	279	35.3	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.1 PK			1.03 V	140	56.1	45.0
2	*6515.00	90.6 AV			1.03 V	140	45.6	45.0
3	#13030.00	57.7 PK	88.2	-30.5	1.32 V	297	48.8	8.9
4	#13030.00	45.2 AV	68.2	-23.0	1.32 V	297	36.3	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.8 PK			2.80 H	294	71.9	44.9
2	*6535.00	106.7 AV			2.80 H	294	61.8	44.9
3	#13070.00	56.7 PK	88.2	-31.5	1.11 H	154	47.7	9.0
4	#13070.00	44.8 AV	68.2	-23.4	1.11 H	154	35.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.8 PK			1.91 V	104	67.9	44.9
2	*6535.00	102.9 AV			1.91 V	104	58.0	44.9
3	#13070.00	56.1 PK	88.2	-32.1	1.12 V	110	47.1	9.0
4	#13070.00	44.4 AV	68.2	-23.8	1.12 V	110	35.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.0 PK			2.80 H	294	72.0	45.0
2	*6695.00	107.1 AV			2.80 H	294	62.1	45.0
3	13390.00	57.8 PK	74.0	-16.2	1.62 H	254	48.2	9.6
4	13390.00	45.7 AV	54.0	-8.3	1.62 H	254	36.1	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.2 PK			1.03 V	139	69.2	45.0
2	*6695.00	104.3 AV			1.03 V	139	59.3	45.0
3	13390.00	58.4 PK	74.0	-15.6	1.37 V	302	48.8	9.6
4	13390.00	46.0 AV	54.0	-8.0	1.37 V	301	36.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.0 PK			2.80 H	294	71.7	45.3
2	*6855.00	107.3 AV			2.80 H	294	62.0	45.3
3	#13710.00	56.8 PK	88.2	-31.4	1.48 H	199	47.8	9.0
4	#13710.00	45.0 AV	68.2	-23.2	1.48 H	199	36.0	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.2 PK			1.91 V	104	67.9	45.3
2	*6855.00	103.7 AV			1.91 V	104	58.4	45.3
3	#13710.00	56.5 PK	88.2	-31.7	1.05 V	199	47.5	9.0
4	#13710.00	44.8 AV	68.2	-23.4	1.05 V	199	35.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.0 PK			2.74 H	280	55.6	45.4
2	*6875.00	91.3 AV			2.74 H	280	45.9	45.4
3	#13750.00	57.1 PK	88.2	-31.1	1.68 H	259	48.2	8.9
4	#13750.00	45.1 AV	68.2	-23.1	1.68 H	259	36.2	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	97.7 PK			1.13 V	51	52.3	45.4
2	*6875.00	87.9 AV			1.13 V	51	42.5	45.4
3	#13750.00	57.8 PK	88.2	-30.4	1.31 V	312	48.9	8.9
4	#13750.00	45.5 AV	68.2	-22.7	1.65 V	251	36.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.4 PK			2.75 H	290	57.1	45.3
2	*6995.00	92.7 AV			2.75 H	290	47.4	45.3
3	#13990.00	57.3 PK	88.2	-30.9	1.97 H	305	47.8	9.5
4	#13990.00	45.8 AV	68.2	-22.4	1.97 H	305	36.3	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	98.0 PK			1.13 V	50	52.7	45.3
2	*6995.00	88.2 AV			1.13 V	50	42.9	45.3
3	#13990.00	57.6 PK	88.2	-30.6	1.07 V	174	48.1	9.5
4	#13990.00	45.4 AV	68.2	-22.8	1.07 V	174	35.9	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.6 PK			2.27 H	282	56.0	45.6
2	*7115.00	92.0 AV			2.27 H	282	46.4	45.6
3	#7125.00	61.9 PK	88.2	-26.3	2.27 H	282	54.4	7.5
4	#7125.00	53.8 AV	68.2	-14.4	2.27 H	282	46.3	7.5
5	#14230.00	56.9 PK	88.2	-31.3	1.05 H	214	47.6	9.3
6	#14230.00	45.6 AV	68.2	-22.6	1.05 H	214	36.3	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.2 PK			1.21 V	112	51.6	45.6
2	*7115.00	87.6 AV			1.21 V	112	42.0	45.6
3	#7125.00	60.4 PK	88.2	-27.8	1.21 V	112	52.9	7.5
4	#7125.00	52.7 AV	68.2	-15.5	1.21 V	112	45.2	7.5
5	#14230.00	56.4 PK	88.2	-31.8	1.07 V	177	47.1	9.3
6	#14230.00	45.0 AV	68.2	-23.2	1.07 V	177	35.7	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.3 PK	88.2	-14.9	2.74 H	305	68.9	4.4
2	#5925.00	55.2 AV	68.2	-13.0	2.74 H	305	50.8	4.4
3	*5955.00	115.4 PK			2.74 H	305	73.2	42.2
4	*5955.00	103.0 AV			2.74 H	305	60.8	42.2
5	11910.00	56.9 PK	74.0	-17.1	1.56 H	273	48.3	8.6
6	11910.00	44.9 AV	54.0	-9.1	1.56 H	273	36.3	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.2 PK	88.2	-12.0	1.08 V	157	71.8	4.4
2	#5925.00	56.6 AV	68.2	-11.6	1.08 V	157	52.2	4.4
3	*5955.00	118.6 PK			1.08 V	157	76.4	42.2
4	*5955.00	106.3 AV			1.08 V	157	64.1	42.2
5	11910.00	57.7 PK	74.0	-16.3	1.42 V	311	49.1	8.6
6	11910.00	45.2 AV	54.0	-8.8	1.42 V	311	36.6	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	111.8 PK			2.25 H	315	68.6	43.2
2	*6195.00	101.9 AV			2.25 H	315	58.7	43.2
3	12390.00	57.4 PK	74.0	-16.6	1.14 H	1	48.5	8.9
4	12390.00	45.0 AV	54.0	-9.0	1.14 H	1	36.1	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.4 PK			1.21 V	150	72.2	43.2
2	*6195.00	105.7 AV			1.21 V	150	62.5	43.2
3	12390.00	57.6 PK	74.0	-16.4	1.57 V	319	48.7	8.9
4	12390.00	45.3 AV	54.0	-8.7	1.57 V	319	36.4	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.2 PK			2.77 H	297	70.6	44.6
2	*6415.00	103.1 AV			2.77 H	297	58.5	44.6
3	#12830.00	57.9 PK	88.2	-30.3	1.64 H	257	48.4	9.5
4	#12830.00	45.8 AV	68.2	-22.4	1.64 H	257	36.3	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.7 PK			1.00 V	140	73.1	44.6
2	*6415.00	105.7 AV			1.00 V	140	61.1	44.6
3	#12830.00	58.3 PK	88.2	-29.9	1.38 V	294	48.8	9.5
4	#12830.00	46.0 AV	68.2	-22.2	1.38 V	294	36.5	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.6 PK			2.65 H	300	56.8	44.8
2	*6435.00	91.7 AV			2.65 H	300	46.9	44.8
3	#12870.00	56.3 PK	88.2	-31.9	1.57 H	189	46.9	9.4
4	#12870.00	44.1 AV	68.2	-24.1	1.57 H	189	34.7	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.7 PK			1.03 V	144	55.9	44.8
2	*6435.00	90.9 AV			1.03 V	144	46.1	44.8
3	#12870.00	55.9 PK	88.2	-32.3	1.36 V	284	46.5	9.4
4	#12870.00	44.0 AV	68.2	-24.2	1.36 V	284	34.6	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.0 PK			2.65 H	300	58.1	44.9
2	*6475.00	93.0 AV			2.65 H	300	48.1	44.9
3	#12950.00	56.9 PK	88.2	-31.3	1.77 H	48	47.7	9.2
4	#12950.00	44.7 AV	68.2	-23.5	1.77 H	48	35.5	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.4 PK			1.03 V	145	56.5	44.9
2	*6475.00	91.4 AV			1.03 V	145	46.5	44.9
3	#12950.00	56.5 PK	88.2	-31.7	1.57 V	188	47.3	9.2
4	#12950.00	44.4 AV	68.2	-23.8	1.57 V	188	35.2	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.2 PK			2.63 H	299	58.2	45.0
2	*6515.00	91.1 AV			2.63 H	299	46.1	45.0
3	#13030.00	56.8 PK	88.2	-31.4	1.62 H	274	47.9	8.9
4	#13030.00	44.4 AV	68.2	-23.8	1.62 H	274	35.5	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.4 PK			1.09 V	142	57.4	45.0
2	*6515.00	90.2 AV			1.09 V	142	45.2	45.0
3	#13030.00	57.5 PK	88.2	-30.7	1.37 V	303	48.6	8.9
4	#13030.00	45.1 AV	68.2	-23.1	1.37 V	303	36.2	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.5 PK			2.80 H	294	71.6	44.9
2	*6535.00	106.4 AV			2.80 H	294	61.5	44.9
3	#13070.00	56.4 PK	88.2	-31.8	1.78 H	192	47.4	9.0
4	#13070.00	45.1 AV	68.2	-23.1	1.78 H	192	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.5 PK			1.91 V	104	67.6	44.9
2	*6535.00	102.4 AV			1.91 V	104	57.5	44.9
3	#13070.00	55.8 PK	88.2	-32.4	1.56 V	290	46.8	9.0
4	#13070.00	44.3 AV	68.2	-23.9	1.56 V	290	35.3	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.8 PK			2.81 H	295	73.8	45.0
2	*6695.00	106.7 AV			2.81 H	295	61.7	45.0
3	13390.00	58.0 PK	74.0	-16.0	1.62 H	253	48.4	9.6
4	13390.00	45.8 AV	54.0	-8.2	1.62 H	253	36.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.7 PK			1.07 V	135	70.7	45.0
2	*6695.00	103.5 AV			1.07 V	135	58.5	45.0
3	13390.00	58.5 PK	74.0	-15.5	1.36 V	303	48.9	9.6
4	13390.00	46.1 AV	54.0	-7.9	1.36 V	303	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.1 PK			2.83 H	293	72.8	45.3
2	*6855.00	106.1 AV			2.83 H	293	60.8	45.3
3	#13710.00	57.4 PK	88.2	-30.8	1.62 H	254	48.4	9.0
4	#13710.00	45.2 AV	68.2	-23.0	1.62 H	254	36.2	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.3 PK			1.00 V	143	70.0	45.3
2	*6855.00	103.2 AV			1.00 V	143	57.9	45.3
3	#13710.00	57.8 PK	88.2	-30.4	1.31 V	309	48.8	9.0
4	#13710.00	45.7 AV	68.2	-22.5	1.31 V	309	36.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.8 PK			2.74 H	280	55.4	45.4
2	*6875.00	90.7 AV			2.74 H	280	45.3	45.4
3	#13750.00	56.6 PK	88.2	-31.6	1.24 H	228	47.7	8.9
4	#13750.00	44.2 AV	68.2	-24.0	1.24 H	228	35.3	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	97.5 PK			1.13 V	51	52.1	45.4
2	*6875.00	87.6 AV			1.13 V	51	42.2	45.4
3	#13750.00	57.5 PK	88.2	-30.7	1.48 V	190	48.6	8.9
4	#13750.00	45.1 AV	68.2	-23.1	1.48 V	190	36.2	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.7 PK			2.62 H	289	57.4	45.3
2	*6995.00	89.8 AV			2.62 H	289	44.5	45.3
3	#13990.00	57.8 PK	88.2	-30.4	1.54 H	255	48.3	9.5
4	#13990.00	45.5 AV	68.2	-22.7	1.54 H	255	36.0	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.6 PK			1.01 V	145	54.3	45.3
2	*6995.00	87.1 AV			1.01 V	145	41.8	45.3
3	#13990.00	58.1 PK	88.2	-30.1	1.57 V	271	48.6	9.5
4	#13990.00	45.8 AV	68.2	-22.4	1.57 V	271	36.3	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.7 PK			2.27 H	282	56.1	45.6
2	*7115.00	92.2 AV			2.27 H	282	46.6	45.6
3	#7125.00	69.5 PK	88.2	-18.7	2.27 H	282	62.0	7.5
4	#7125.00	58.4 AV	68.2	-9.8	2.27 H	282	50.9	7.5
5	#14230.00	56.9 PK	88.2	-31.3	1.97 H	266	47.6	9.3
6	#14230.00	45.2 AV	68.2	-23.0	1.97 H	266	35.9	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.5 PK			1.21 V	112	51.9	45.6
2	*7115.00	87.7 AV			1.21 V	112	42.1	45.6
3	#7125.00	65.6 PK	88.2	-22.6	1.21 V	112	58.1	7.5
4	#7125.00	55.3 AV	68.2	-12.9	1.21 V	112	47.8	7.5
5	#14230.00	56.7 PK	88.2	-31.5	1.57 V	290	47.4	9.3
6	#14230.00	44.7 AV	68.2	-23.5	1.57 V	290	35.4	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.8 PK	88.2	-15.4	2.47 H	297	68.4	4.4
2	#5925.00	62.1 AV	68.2	-6.1	2.47 H	297	57.7	4.4
3	*5965.00	109.5 PK			2.47 H	297	67.3	42.2
4	*5965.00	97.1 AV			2.47 H	297	54.9	42.2
5	11930.00	55.8 PK	74.0	-18.2	1.54 H	75	47.2	8.6
6	11930.00	44.1 AV	54.0	-9.9	1.54 H	75	35.5	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.7 PK	88.2	-10.5	1.06 V	130	73.3	4.4
2	#5925.00	67.1 AV	68.2	-1.1	1.06 V	130	62.7	4.4
3	*5965.00	112.7 PK			1.06 V	130	70.5	42.2
4	*5965.00	100.6 AV			1.06 V	130	58.4	42.2
5	11930.00	56.2 PK	74.0	-17.8	1.05 V	197	47.6	8.6
6	11930.00	44.4 AV	54.0	-9.6	1.05 V	197	35.8	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	111.5 PK			2.61 H	308	68.2	43.3
2	*6205.00	99.2 AV			2.61 H	308	55.9	43.3
3	12410.00	57.0 PK	74.0	-17.0	1.53 H	252	48.2	8.8
4	12410.00	44.6 AV	54.0	-9.4	1.53 H	252	35.8	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.7 PK			1.08 V	140	71.4	43.3
2	*6205.00	102.5 AV			1.08 V	140	59.2	43.3
3	12410.00	57.4 PK	74.0	-16.6	1.38 V	297	48.6	8.8
4	12410.00	45.0 AV	54.0	-9.0	1.38 V	297	36.2	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.1 PK			2.47 H	297	66.6	44.5
2	*6405.00	99.4 AV			2.47 H	297	54.9	44.5
3	#12810.00	56.8 PK	88.2	-31.4	1.54 H	169	47.2	9.6
4	#12810.00	44.3 AV	68.2	-23.9	1.54 H	169	34.7	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.3 PK			1.06 V	130	69.8	44.5
2	*6405.00	102.4 AV			1.06 V	130	57.9	44.5
3	#12810.00	57.2 PK	88.2	-31.0	1.59 V	2	47.6	9.6
4	#12810.00	45.3 AV	68.2	-22.9	1.59 V	2	35.7	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	103.3 PK			2.75 H	295	58.5	44.8
2	*6445.00	91.1 AV			2.75 H	295	46.3	44.8
3	#12890.00	57.5 PK	88.2	-30.7	1.55 H	269	48.2	9.3
4	#12890.00	45.0 AV	68.2	-23.2	1.55 H	269	35.7	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.3 PK			1.03 V	146	57.5	44.8
2	*6445.00	90.2 AV			1.03 V	146	45.4	44.8
3	#12890.00	57.8 PK	88.2	-30.4	1.38 V	296	48.5	9.3
4	#12890.00	45.5 AV	68.2	-22.7	1.38 V	296	36.2	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	103.4 PK			2.75 H	296	58.5	44.9
2	*6485.00	91.6 AV			2.75 H	296	46.7	44.9
3	#12970.00	57.9 PK	88.2	-30.3	1.92 H	358	48.9	9.0
4	#12970.00	45.6 AV	68.2	-22.6	1.92 H	358	36.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	102.2 PK			1.03 V	146	57.3	44.9
2	*6485.00	90.1 AV			1.03 V	146	45.2	44.9
3	#12970.00	57.7 PK	88.2	-30.5	1.44 V	173	48.7	9.0
4	#12970.00	45.4 AV	68.2	-22.8	1.44 V	173	36.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	103.0 PK			2.75 H	296	58.1	44.9
2	*6525.00	91.2 AV			2.75 H	296	46.3	44.9
3	#13050.00	57.8 PK	88.2	-30.4	1.15 H	141	48.9	8.9
4	#13050.00	45.5 AV	68.2	-22.7	1.15 H	141	36.6	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	102.4 PK			1.03 V	146	57.5	44.9
2	*6525.00	90.0 AV			1.03 V	146	45.1	44.9
3	#13050.00	57.5 PK	88.2	-30.7	1.75 V	281	48.6	8.9
4	#13050.00	44.9 AV	68.2	-23.3	1.75 V	281	36.0	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	116.8 PK			2.73 H	303	71.9	44.9
2	*6565.00	104.4 AV			2.73 H	303	59.5	44.9
3	#13130.00	58.1 PK	88.2	-30.1	1.05 H	214	49.1	9.0
4	#13130.00	45.8 AV	68.2	-22.4	1.05 H	214	36.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.0 PK			1.05 V	141	69.1	44.9
2	*6565.00	102.7 AV			1.05 V	141	57.8	44.9
3	#13130.00	58.0 PK	88.2	-30.2	1.59 V	300	49.0	9.0
4	#13130.00	45.5 AV	68.2	-22.7	1.59 V	300	36.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	117.0 PK			2.73 H	302	72.0	45.0
2	*6685.00	104.6 AV			2.73 H	302	59.6	45.0
3	13370.00	57.8 PK	74.0	-16.2	1.52 H	254	48.3	9.5
4	13370.00	45.5 AV	54.0	-8.5	1.52 H	254	36.0	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	114.2 PK			1.05 V	141	69.2	45.0
2	*6685.00	101.8 AV			1.05 V	141	56.8	45.0
3	13370.00	58.1 PK	74.0	-15.9	1.34 V	300	48.6	9.5
4	13370.00	45.9 AV	54.0	-8.1	1.34 V	300	36.4	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	116.3 PK			2.71 H	292	71.0	45.3
2	*6845.00	103.9 AV			2.71 H	292	58.6	45.3
3	#13690.00	57.3 PK	88.2	-30.9	1.53 H	262	48.2	9.1
4	#13690.00	44.7 AV	68.2	-23.5	1.53 H	262	35.6	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.6 PK			1.05 V	147	68.3	45.3
2	*6845.00	101.1 AV			1.05 V	147	55.8	45.3
3	#13690.00	57.6 PK	88.2	-30.6	1.38 V	295	48.5	9.1
4	#13690.00	45.3 AV	68.2	-22.9	1.38 V	295	36.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	104.5 PK			2.56 H	281	59.1	45.4
2	*6885.00	91.6 AV			2.56 H	281	46.2	45.4
3	#13770.00	57.1 PK	88.2	-31.1	1.53 H	259	48.3	8.8
4	#13770.00	44.7 AV	68.2	-23.5	1.53 H	259	35.9	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	101.3 PK			1.03 V	144	55.9	45.4
2	*6885.00	88.8 AV			1.03 V	144	43.4	45.4
3	#13770.00	57.3 PK	88.2	-30.9	1.34 V	297	48.5	8.8
4	#13770.00	45.0 AV	68.2	-23.2	1.34 V	297	36.2	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	104.1 PK			2.56 H	280	58.8	45.3
2	*6965.00	92.2 AV			2.56 H	280	46.9	45.3
3	#13930.00	57.2 PK	88.2	-31.0	1.59 H	290	48.0	9.2
4	#13930.00	44.6 AV	68.2	-23.6	1.59 H	290	35.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	101.5 PK			1.03 V	144	56.2	45.3
2	*6965.00	89.6 AV			1.03 V	144	44.3	45.3
3	#13930.00	57.0 PK	88.2	-31.2	1.66 V	137	47.8	9.2
4	#13930.00	44.1 AV	68.2	-24.1	1.66 V	137	34.9	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	104.0 PK			2.27 H	282	58.4	45.6
2	*7085.00	92.1 AV			2.27 H	282	46.5	45.6
3	#7125.00	62.0 PK	88.2	-26.2	2.27 H	282	54.5	7.5
4	#7125.00	49.1 AV	68.2	-19.1	2.27 H	282	41.6	7.5
5	#14170.00	58.2 PK	88.2	-30.0	1.59 H	92	49.0	9.2
6	#14170.00	45.6 AV	68.2	-22.6	1.59 H	92	36.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	100.0 PK			1.21 V	112	54.4	45.6
2	*7085.00	88.5 AV			1.21 V	112	42.9	45.6
3	#7125.00	61.9 PK	88.2	-26.3	1.21 V	112	54.4	7.5
4	#7125.00	48.8 AV	68.2	-19.4	1.21 V	112	41.3	7.5
5	#14170.00	57.7 PK	88.2	-30.5	1.52 V	280	48.5	9.2
6	#14170.00	45.1 AV	68.2	-23.1	1.52 V	280	35.9	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.1 PK	88.2	-10.1	2.72 H	296	73.7	4.4
2	#5925.00	59.0 AV	68.2	-9.2	2.72 H	296	54.6	4.4
3	*5985.00	107.0 PK			2.72 H	296	64.8	42.2
4	*5985.00	95.2 AV			2.72 H	296	53.0	42.2
5	11970.00	56.4 PK	74.0	-17.6	1.17 H	240	47.8	8.6
6	11970.00	44.5 AV	54.0	-9.5	1.17 H	240	35.9	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.3 PK	88.2	-3.9	1.06 V	130	79.9	4.4
2	#5925.00	66.1 AV	68.2	-2.1	1.06 V	130	61.7	4.4
3	*5985.00	111.0 PK			1.06 V	130	68.8	42.2
4	*5985.00	99.3 AV			1.06 V	130	57.1	42.2
5	11970.00	56.8 PK	74.0	-17.2	1.67 V	344	48.2	8.6
6	11970.00	44.9 AV	54.0	-9.1	1.67 V	344	36.3	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.6 PK			2.72 H	296	66.2	43.4
2	*6225.00	97.4 AV			2.72 H	296	54.0	43.4
3	12450.00	56.6 PK	74.0	-17.4	1.64 H	2	48.0	8.6
4	12450.00	44.7 AV	54.0	-9.3	1.64 H	2	36.1	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	113.3 PK			1.06 V	130	69.9	43.4
2	*6225.00	111.4 AV			1.06 V	130	68.0	43.4
3	12450.00	57.1 PK	74.0	-16.9	1.05 V	100	48.5	8.6
4	12450.00	45.2 AV	54.0	-8.8	1.05 V	100	36.6	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.8 PK			2.57 H	312	65.4	44.4
2	*6385.00	97.5 AV			2.57 H	312	53.1	44.4
3	#12770.00	57.8 PK	88.2	-30.4	1.72 H	267	48.2	9.6
4	#12770.00	45.4 AV	68.2	-22.8	1.72 H	267	35.8	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.1 PK			1.01 V	137	68.7	44.4
2	*6385.00	100.7 AV			1.01 V	137	56.3	44.4
3	#12770.00	58.2 PK	88.2	-30.0	1.42 V	312	48.6	9.6
4	#12770.00	45.9 AV	68.2	-22.3	1.42 V	312	36.3	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.8 PK			2.66 H	297	58.9	44.9
2	*6465.00	91.3 AV			2.66 H	297	46.4	44.9
3	#12930.00	57.3 PK	88.2	-30.9	1.56 H	276	48.2	9.1
4	#12930.00	44.7 AV	68.2	-23.5	1.56 H	276	35.6	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.1 PK			1.03 V	146	58.2	44.9
2	*6465.00	90.5 AV			1.03 V	146	45.6	44.9
3	#12930.00	57.6 PK	88.2	-30.6	1.39 V	292	48.5	9.1
4	#12930.00	45.2 AV	68.2	-23.0	1.39 V	292	36.1	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	103.3 PK			2.70 H	299	58.4	44.9
2	*6545.00	91.7 AV			2.70 H	299	46.8	44.9
3	#13090.00	58.0 PK	88.2	-30.2	1.57 H	199	49.0	9.0
4	#13090.00	45.6 AV	68.2	-22.6	1.57 H	199	36.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	100.2 PK			1.08 V	140	55.3	44.9
2	*6545.00	88.6 AV			1.08 V	140	43.7	44.9
3	#13090.00	57.5 PK	88.2	-30.7	1.64 V	307	48.5	9.0
4	#13090.00	45.1 AV	68.2	-23.1	1.64 V	307	36.1	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.2 PK			2.68 H	300	67.3	44.9
2	*6625.00	110.6 AV			2.68 H	300	65.7	44.9
3	13250.00	58.0 PK	74.0	-16.0	1.67 H	91	48.9	9.1
4	13250.00	45.7 AV	54.0	-8.3	1.67 H	91	36.6	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.1 PK			1.08 V	141	65.2	44.9
2	*6625.00	98.6 AV			1.08 V	141	53.7	44.9
3	13250.00	57.8 PK	74.0	-16.2	1.59 V	310	48.7	9.1
4	13250.00	45.5 AV	54.0	-8.5	1.59 V	310	36.4	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	113.5 PK			2.70 H	295	68.5	45.0
2	*6705.00	101.1 AV			2.70 H	295	56.1	45.0
3	#13410.00	57.9 PK	88.2	-30.3	1.58 H	251	48.2	9.7
4	#13410.00	45.4 AV	68.2	-22.8	1.58 H	251	35.7	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.8 PK			1.08 V	148	65.8	45.0
2	*6705.00	98.3 AV			1.08 V	148	53.3	45.0
3	#13410.00	58.2 PK	88.2	-30.0	1.46 V	315	48.5	9.7
4	#13410.00	45.8 AV	68.2	-22.4	1.46 V	315	36.1	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.1 PK			2.67 H	300	67.1	45.0
2	*6785.00	110.3 AV			2.67 H	300	65.3	45.0
3	#13570.00	57.9 PK	88.2	-30.3	1.65 H	9	48.9	9.0
4	#13570.00	45.3 AV	68.2	-22.9	1.65 H	9	36.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.0 PK			1.10 V	145	65.0	45.0
2	*6785.00	98.3 AV			1.10 V	145	53.3	45.0
3	#13570.00	57.0 PK	88.2	-31.2	1.68 V	306	48.0	9.0
4	#13570.00	44.9 AV	68.2	-23.3	1.68 V	306	35.9	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	103.2 PK			2.78 H	298	57.8	45.4
2	*6865.00	90.8 AV			2.78 H	298	45.4	45.4
3	#13730.00	57.0 PK	88.2	-31.2	1.55 H	278	48.1	8.9
4	#13730.00	44.5 AV	68.2	-23.7	1.55 H	278	35.6	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	99.6 PK			1.07 V	149	54.2	45.4
2	*6865.00	87.0 AV			1.07 V	149	41.6	45.4
3	#13730.00	57.2 PK	88.2	-31.0	1.47 V	318	48.3	8.9
4	#13730.00	44.8 AV	68.2	-23.4	1.47 V	318	35.9	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	103.1 PK			2.77 H	299	57.8	45.3
2	*6945.00	91.1 AV			2.77 H	299	45.8	45.3
3	#13890.00	56.9 PK	88.2	-31.3	1.65 H	290	47.9	9.0
4	#13890.00	44.3 AV	68.2	-23.9	1.65 H	290	35.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	100.5 PK			1.08 V	148	55.2	45.3
2	*6945.00	88.7 AV			1.08 V	148	43.4	45.3
3	#13890.00	56.1 PK	88.2	-32.1	1.47 V	7	47.1	9.0
4	#13890.00	44.0 AV	68.2	-24.2	1.47 V	7	35.0	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	102.5 PK			2.27 H	282	57.0	45.5
2	*7025.00	90.1 AV			2.27 H	282	44.6	45.5
3	#7125.00	61.7 PK	88.2	-26.5	2.27 H	282	54.2	7.5
4	#7125.00	48.7 AV	68.2	-19.5	2.27 H	282	41.2	7.5
5	#14050.00	56.8 PK	88.2	-31.4	1.74 H	187	47.4	9.4
6	#14050.00	45.7 AV	68.2	-22.5	1.74 H	187	36.3	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	98.0 PK			1.21 V	112	52.5	45.5
2	*7025.00	86.4 AV			1.21 V	112	40.9	45.5
3	#7125.00	61.5 PK	88.2	-26.7	1.21 V	112	54.0	7.5
4	#7125.00	48.5 AV	68.2	-19.7	1.21 V	112	41.0	7.5
5	#14050.00	56.5 PK	88.2	-31.7	1.59 V	2	47.1	9.4
6	#14050.00	44.8 AV	68.2	-23.4	1.59 V	2	35.4	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5889.00	77.8 PK	88.2	-10.4	2.55 H	309	73.5	4.3
2	#5889.00	55.4 AV	68.2	-12.8	2.55 H	309	51.1	4.3
3	*6025.00	103.2 PK			2.55 H	309	60.9	42.3
4	*6025.00	90.4 AV			2.55 H	309	48.1	42.3
5	12050.00	56.5 PK	74.0	-17.5	1.45 H	291	47.9	8.6
6	12050.00	44.1 AV	54.0	-9.9	1.45 H	291	35.5	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5889.00	81.4 PK	88.2	-6.8	1.09 V	156	77.1	4.3
2	#5889.00	59.3 AV	68.2	-8.9	1.09 V	156	55.0	4.3
3	*6025.00	105.8 PK			1.09 V	156	63.5	42.3
4	*6025.00	93.5 AV			1.09 V	156	51.2	42.3
5	12050.00	57.0 PK	74.0	-17.0	1.48 V	303	48.4	8.6
6	12050.00	44.7 AV	54.0	-9.3	1.48 V	303	36.1	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	103.7 PK			2.55 H	310	60.5	43.2
2	*6185.00	91.8 AV			2.55 H	310	48.6	43.2
3	12370.00	56.4 PK	74.0	-17.6	1.59 H	99	47.6	8.8
4	12370.00	44.3 AV	54.0	-9.7	1.59 H	99	35.5	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.5 PK			1.10 V	154	62.3	43.2
2	*6185.00	93.7 AV			1.10 V	154	50.5	43.2
3	12370.00	56.8 PK	74.0	-17.2	1.67 V	7	48.0	8.8
4	12370.00	44.5 AV	54.0	-9.5	1.67 V	7	35.7	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	103.4 PK			2.50 H	309	59.2	44.2
2	*6345.00	91.2 AV			2.50 H	309	47.0	44.2
3	12690.00	55.9 PK	74.0	-18.1	1.54 H	100	46.3	9.6
4	12690.00	44.2 AV	54.0	-9.8	1.54 H	100	34.6	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.3 PK			1.10 V	154	61.1	44.2
2	*6345.00	93.1 AV			1.10 V	154	48.9	44.2
3	12690.00	56.3 PK	74.0	-17.7	1.85 V	174	46.7	9.6
4	12690.00	44.9 AV	54.0	-9.1	1.85 V	174	35.3	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.3 PK			2.67 H	285	59.3	45.0
2	*6505.00	91.5 AV			2.67 H	285	46.5	45.0
3	#13010.00	57.0 PK	88.2	-31.2	1.79 H	274	48.2	8.8
4	#13010.00	44.5 AV	68.2	-23.7	1.79 H	274	35.7	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.2 PK			1.05 V	146	58.2	45.0
2	*6505.00	90.8 AV			1.05 V	146	45.8	45.0
3	#13010.00	57.2 PK	88.2	-31.0	1.41 V	299	48.4	8.8
4	#13010.00	44.7 AV	68.2	-23.5	1.41 V	299	35.9	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.8 PK			2.51 H	295	59.8	45.0
2	*6665.00	92.5 AV			2.51 H	295	47.5	45.0
3	13330.00	57.5 PK	74.0	-16.5	1.55 H	263	48.3	9.2
4	13330.00	45.0 AV	54.0	-9.0	1.55 H	263	35.8	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.9 PK			1.07 V	143	56.9	45.0
2	*6665.00	89.7 AV			1.07 V	143	44.7	45.0
3	13330.00	57.8 PK	74.0	-16.2	1.41 V	307	48.6	9.2
4	13330.00	45.4 AV	54.0	-8.6	1.41 V	307	36.2	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	101.4 PK			2.73 H	301	56.3	45.1
2	*6825.00	89.6 AV			2.73 H	301	44.5	45.1
3	#13650.00	57.0 PK	88.2	-31.2	1.57 H	119	48.0	9.0
4	#13650.00	45.0 AV	68.2	-23.2	1.57 H	119	36.0	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	100.0 PK			1.03 V	142	54.9	45.1
2	*6825.00	88.2 AV			1.03 V	142	43.1	45.1
3	#13650.00	56.5 PK	88.2	-31.7	1.47 V	137	47.5	9.0
4	#13650.00	44.4 AV	68.2	-23.8	1.47 V	137	35.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	101.8 PK			2.73 H	305	56.5	45.3
2	*6985.00	89.7 AV			2.73 H	305	44.4	45.3
3	#7125.00	68.0 PK	88.2	-20.2	2.73 H	305	60.5	7.5
4	#7125.00	52.9 AV	68.2	-15.3	2.73 H	305	45.4	7.5
5	#13970.00	57.4 PK	88.2	-30.8	1.64 H	255	47.9	9.5
6	#13970.00	44.7 AV	68.2	-23.5	1.64 H	255	35.2	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	98.8 PK			1.03 V	148	53.5	45.3
2	*6985.00	86.6 AV			1.03 V	148	41.3	45.3
3	#7125.00	67.3 PK	88.2	-20.9	1.03 V	148	59.8	7.5
4	#7125.00	52.6 AV	68.2	-15.6	1.03 V	148	45.1	7.5
5	#13970.00	57.8 PK	88.2	-30.4	1.36 V	307	48.3	9.5
6	#13970.00	45.4 AV	68.2	-22.8	1.36 V	307	35.9	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Partial RU_1TX

26-tone RU

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.5 PK	88.2	-25.7	2.75 H	310	58.1	4.4
2	#5925.00	46.8 AV	68.2	-21.4	2.75 H	310	42.4	4.4
3	*5955.00	118.1 PK			2.75 H	310	75.9	42.2
4	*5955.00	105.3 AV			2.75 H	310	63.1	42.2
5	11910.00	57.1 PK	74.0	-16.9	1.74 H	253	48.5	8.6
6	11910.00	44.9 AV	54.0	-9.1	1.74 H	253	36.3	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.7 PK	88.2	-23.5	1.07 V	137	60.3	4.4
2	#5925.00	47.9 AV	68.2	-20.3	1.07 V	137	43.5	4.4
3	*5955.00	121.4 PK			1.07 V	137	79.2	42.2
4	*5955.00	108.6 AV			1.07 V	137	66.4	42.2
5	11910.00	57.8 PK	74.0	-16.2	1.43 V	315	49.2	8.6
6	11910.00	45.2 AV	54.0	-8.8	1.43 V	315	36.6	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.9 PK			2.73 H	314	73.7	43.2
2	*6195.00	104.8 AV			2.73 H	314	61.6	43.2
3	12390.00	57.5 PK	74.0	-16.5	1.82 H	264	48.6	8.9
4	12390.00	45.3 AV	54.0	-8.7	1.82 H	264	36.4	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.3 PK			1.12 V	141	77.1	43.2
2	*6195.00	108.0 AV			1.12 V	141	64.8	43.2
3	12390.00	58.1 PK	74.0	-15.9	1.32 V	317	49.2	8.9
4	12390.00	45.6 AV	54.0	-8.4	1.32 V	317	36.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.8 PK			2.70 H	310	71.2	44.6
2	*6415.00	103.7 AV			2.70 H	310	59.1	44.6
3	#12830.00	57.3 PK	88.2	-30.9	1.45 H	144	47.8	9.5
4	#12830.00	44.5 AV	68.2	-23.7	1.45 H	144	35.0	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.4 PK			1.12 V	141	74.8	44.6
2	*6415.00	107.4 AV			1.12 V	141	62.8	44.6
3	#12830.00	58.0 PK	88.2	-30.2	1.45 V	314	48.5	9.5
4	#12830.00	45.4 AV	68.2	-22.8	1.45 V	314	35.9	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.3 PK			2.70 H	311	57.5	44.8
2	*6435.00	89.4 AV			2.70 H	311	44.6	44.8
3	#12870.00	56.9 PK	88.2	-31.3	1.15 H	127	47.5	9.4
4	#12870.00	45.0 AV	68.2	-23.2	1.15 H	127	35.6	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.2 PK			1.12 V	141	55.4	44.8
2	*6435.00	88.6 AV			1.12 V	141	43.8	44.8
3	#12870.00	56.6 PK	88.2	-31.6	1.57 V	174	47.2	9.4
4	#12870.00	44.2 AV	68.2	-24.0	1.57 V	174	34.8	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.6 PK			2.66 H	302	57.7	44.9
2	*6475.00	91.4 AV			2.66 H	302	46.5	44.9
3	#12950.00	57.5 PK	88.2	-30.7	1.67 H	246	48.3	9.2
4	#12950.00	45.1 AV	68.2	-23.1	1.67 H	246	35.9	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.7 PK			1.22 V	140	56.8	44.9
2	*6475.00	90.6 AV			1.22 V	140	45.7	44.9
3	#12950.00	57.9 PK	88.2	-30.3	1.34 V	303	48.7	9.2
4	#12950.00	45.6 AV	68.2	-22.6	1.34 V	303	36.4	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.5 PK			2.70 H	311	57.5	45.0
2	*6515.00	90.6 AV			2.70 H	311	45.6	45.0
3	#13030.00	57.1 PK	88.2	-31.1	1.69 H	290	48.2	8.9
4	#13030.00	45.3 AV	68.2	-22.9	1.69 H	290	36.4	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.7 PK			1.12 V	141	55.7	45.0
2	*6515.00	88.9 AV			1.12 V	141	43.9	45.0
3	#13030.00	56.5 PK	88.2	-31.7	1.75 V	347	47.6	8.9
4	#13030.00	44.7 AV	68.2	-23.5	1.75 V	347	35.8	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.8 PK			2.70 H	310	74.9	44.9
2	*6535.00	107.7 AV			2.70 H	310	62.8	44.9
3	#13070.00	57.4 PK	88.2	-30.8	1.95 H	9	48.4	9.0
4	#13070.00	45.5 AV	68.2	-22.7	1.95 H	9	36.5	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.3 PK			1.10 V	145	71.4	44.9
2	*6535.00	104.7 AV			1.10 V	145	59.8	44.9
3	#13070.00	57.0 PK	88.2	-31.2	1.74 V	2	48.0	9.0
4	#13070.00	45.1 AV	68.2	-23.1	1.74 V	2	36.1	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.6 PK			2.54 H	301	72.6	45.0
2	*6695.00	106.7 AV			2.54 H	301	61.7	45.0
3	13390.00	58.2 PK	74.0	-15.8	1.71 H	256	48.6	9.6
4	13390.00	45.8 AV	54.0	-8.2	1.71 H	256	36.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.6 PK			1.08 V	139	69.6	45.0
2	*6695.00	103.6 AV			1.08 V	138	58.6	45.0
3	13390.00	58.4 PK	74.0	-15.6	1.37 V	316	48.8	9.6
4	13390.00	46.1 AV	54.0	-7.9	1.37 V	316	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.2 PK			2.87 H	292	72.9	45.3
2	*6855.00	107.1 AV			2.87 H	292	61.8	45.3
3	#13710.00	57.4 PK	88.2	-30.8	1.58 H	267	48.4	9.0
4	#13710.00	45.1 AV	68.2	-23.1	1.58 H	267	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.2 PK			1.16 V	143	69.9	45.3
2	*6855.00	104.0 AV			1.16 V	143	58.7	45.3
3	#13710.00	57.6 PK	88.2	-30.6	1.33 V	324	48.6	9.0
4	#13710.00	45.4 AV	68.2	-22.8	1.33 V	324	36.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	103.4 PK			2.70 H	288	58.0	45.4
2	*6875.00	91.7 AV			2.70 H	288	46.3	45.4
3	#13750.00	57.5 PK	88.2	-30.7	1.92 H	167	48.6	8.9
4	#13750.00	45.6 AV	68.2	-22.6	1.92 H	167	36.7	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.0 PK			1.10 V	142	54.6	45.4
2	*6875.00	88.3 AV			1.10 V	142	42.9	45.4
3	#13750.00	57.3 PK	88.2	-30.9	1.55 V	351	48.4	8.9
4	#13750.00	44.8 AV	68.2	-23.4	1.55 V	351	35.9	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.1 PK			2.69 H	289	57.8	45.3
2	*6995.00	91.3 AV			2.69 H	289	46.0	45.3
3	#13990.00	57.4 PK	88.2	-30.8	1.54 H	200	47.9	9.5
4	#13990.00	44.8 AV	68.2	-23.4	1.54 H	200	35.3	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.0 PK			1.09 V	142	54.7	45.3
2	*6995.00	88.1 AV			1.09 V	142	42.8	45.3
3	#13990.00	56.3 PK	88.2	-31.9	1.05 V	239	46.8	9.5
4	#13990.00	44.2 AV	68.2	-24.0	1.05 V	239	34.7	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.7 PK			2.68 H	288	58.1	45.6
2	*7115.00	92.0 AV			2.68 H	288	46.4	45.6
3	#7125.00	69.0 PK	88.2	-19.2	2.68 H	288	61.5	7.5
4	#7125.00	57.6 AV	68.2	-10.6	2.68 H	288	50.1	7.5
5	#14230.00	57.5 PK	88.2	-30.7	1.64 H	263	48.2	9.3
6	#14230.00	45.0 AV	68.2	-23.2	1.64 H	263	35.7	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.4 PK			1.09 V	141	54.8	45.6
2	*7115.00	88.7 AV			1.09 V	141	43.1	45.6
3	#7125.00	65.7 PK	88.2	-22.5	2.68 V	273	58.2	7.5
4	#7125.00	55.2 AV	68.2	-13.0	2.68 V	273	47.7	7.5
5	#14230.00	57.8 PK	88.2	-30.4	1.34 V	302	48.5	9.3
6	#14230.00	45.5 AV	68.2	-22.7	1.34 V	302	36.2	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

52-tone RU

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	2.77 H	312	59.5	4.4
2	#5925.00	47.1 AV	68.2	-21.1	2.77 H	312	42.7	4.4
3	*5955.00	118.3 PK			2.77 H	312	76.1	42.2
4	*5955.00	105.1 AV			2.77 H	312	62.9	42.2
5	11910.00	57.1 PK	74.0	-16.9	1.72 H	257	48.5	8.6
6	11910.00	44.8 AV	54.0	-9.2	1.72 H	257	36.2	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.3 PK	88.2	-22.9	1.06 V	137	60.9	4.4
2	#5925.00	48.1 AV	68.2	-20.1	1.06 V	137	43.7	4.4
3	*5955.00	121.6 PK			1.06 V	137	79.4	42.2
4	*5955.00	108.5 AV			1.06 V	137	66.3	42.2
5	11910.00	57.7 PK	74.0	-16.3	1.36 V	304	49.1	8.6
6	11910.00	45.1 AV	54.0	-8.9	1.36 V	304	36.5	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.8 PK			2.71 H	311	73.6	43.2
2	*6195.00	105.4 AV			2.71 H	311	62.2	43.2
3	12390.00	57.4 PK	74.0	-16.6	1.77 H	259	48.5	8.9
4	12390.00	45.2 AV	54.0	-8.8	1.77 H	259	36.3	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.9 PK			1.13 V	139	76.7	43.2
2	*6195.00	108.6 AV			1.13 V	139	65.4	43.2
3	12390.00	57.8 PK	74.0	-16.2	1.39 V	307	48.9	8.9
4	12390.00	45.6 AV	54.0	-8.4	1.39 V	307	36.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.6 PK			2.71 H	311	72.0	44.6
2	*6415.00	105.2 AV			2.71 H	311	60.6	44.6
3	#12830.00	57.1 PK	88.2	-31.1	1.67 H	100	47.6	9.5
4	#12830.00	44.9 AV	68.2	-23.3	1.67 H	100	35.4	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.7 PK			1.14 V	140	75.1	44.6
2	*6415.00	108.8 AV			1.14 V	140	64.2	44.6
3	#12830.00	57.7 PK	88.2	-30.5	1.65 V	199	48.2	9.5
4	#12830.00	45.4 AV	68.2	-22.8	1.65 V	199	35.9	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.4 PK			2.55 H	305	57.6	44.8
2	*6435.00	91.7 AV			2.55 H	305	46.9	44.8
3	#12870.00	57.1 PK	88.2	-31.1	1.57 H	1	47.7	9.4
4	#12870.00	44.8 AV	68.2	-23.4	1.57 H	1	35.4	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.4 PK			1.17 V	140	56.6	44.8
2	*6435.00	90.3 AV			1.17 V	140	45.5	44.8
3	#12870.00	57.5 PK	88.2	-30.7	1.59 V	190	48.1	9.4
4	#12870.00	45.0 AV	68.2	-23.2	1.59 V	190	35.6	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.6 PK			2.58 H	301	57.7	44.9
2	*6475.00	91.3 AV			2.58 H	301	46.4	44.9
3	#12950.00	56.8 PK	88.2	-31.4	1.15 H	268	47.6	9.2
4	#12950.00	44.5 AV	68.2	-23.7	1.15 H	268	35.3	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.2 PK			1.17 V	139	56.3	44.9
2	*6475.00	90.0 AV			1.17 V	139	45.1	44.9
3	#12950.00	57.6 PK	88.2	-30.6	1.57 V	249	48.4	9.2
4	#12950.00	45.1 AV	68.2	-23.1	1.57 V	249	35.9	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.3 PK			2.59 H	305	57.3	45.0
2	*6515.00	91.3 AV			2.59 H	305	46.3	45.0
3	#13030.00	57.0 PK	88.2	-31.2	1.74 H	259	48.1	8.9
4	#13030.00	44.6 AV	68.2	-23.6	1.74 H	259	35.7	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.5 PK			1.17 V	140	56.5	45.0
2	*6515.00	90.4 AV			1.17 V	140	45.4	45.0
3	#13030.00	57.7 PK	88.2	-30.5	1.39 V	314	48.8	8.9
4	#13030.00	45.4 AV	68.2	-22.8	1.39 V	314	36.5	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.1 PK			2.58 H	304	73.2	44.9
2	*6535.00	107.2 AV			2.58 H	304	62.3	44.9
3	#13070.00	57.2 PK	88.2	-31.0	1.90 H	324	48.2	9.0
4	#13070.00	45.1 AV	68.2	-23.1	1.90 H	324	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.3 PK			1.15 V	140	70.4	44.9
2	*6535.00	104.6 AV			1.15 V	140	59.7	44.9
3	#13070.00	57.8 PK	88.2	-30.4	1.59 V	260	48.8	9.0
4	#13070.00	45.6 AV	68.2	-22.6	1.59 V	260	36.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.4 PK			2.58 H	303	73.4	45.0
2	*6695.00	106.9 AV			2.58 H	303	61.9	45.0
3	13390.00	58.1 PK	74.0	-15.9	1.64 H	252	48.5	9.6
4	13390.00	45.8 AV	54.0	-8.2	1.64 H	252	36.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.3 PK			1.14 V	142	70.3	45.0
2	*6695.00	103.8 AV			1.14 V	142	58.8	45.0
3	13390.00	58.3 PK	74.0	-15.7	1.32 V	309	48.7	9.6
4	13390.00	46.0 AV	54.0	-8.0	1.32 V	309	36.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.3 PK			2.59 H	306	73.0	45.3
2	*6855.00	107.4 AV			2.59 H	306	62.1	45.3
3	#13710.00	57.2 PK	88.2	-31.0	1.99 H	198	48.2	9.0
4	#13710.00	45.6 AV	68.2	-22.6	1.99 H	198	36.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.4 PK			1.15 V	141	70.1	45.3
2	*6855.00	104.1 AV			1.15 V	141	58.8	45.3
3	#13710.00	58.0 PK	88.2	-30.2	1.59 V	290	49.0	9.0
4	#13710.00	46.1 AV	68.2	-22.1	1.59 V	290	37.1	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.4 PK			2.70 H	288	59.0	45.4
2	*6875.00	92.7 AV			2.70 H	288	47.3	45.4
3	#13750.00	57.4 PK	88.2	-30.8	1.95 H	268	48.5	8.9
4	#13750.00	44.9 AV	68.2	-23.3	1.95 H	268	36.0	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.6 PK			1.10 V	142	56.2	45.4
2	*6875.00	89.0 AV			1.10 V	142	43.6	45.4
3	#13750.00	56.6 PK	88.2	-31.6	1.57 V	3	47.7	8.9
4	#13750.00	44.7 AV	68.2	-23.5	1.57 V	3	35.8	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.3 PK			2.69 H	288	59.0	45.3
2	*6995.00	92.1 AV			2.69 H	288	46.8	45.3
3	#13990.00	57.8 PK	88.2	-30.4	1.98 H	214	48.3	9.5
4	#13990.00	45.6 AV	68.2	-22.6	1.98 H	214	36.1	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.4 PK			1.08 V	141	56.1	45.3
2	*6995.00	89.3 AV			1.08 V	141	44.0	45.3
3	#13990.00	57.5 PK	88.2	-30.7	1.90 V	136	48.0	9.5
4	#13990.00	47.4 AV	68.2	-20.8	1.90 V	136	37.9	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.0 PK			2.68 H	288	59.4	45.6
2	*7115.00	92.5 AV			2.68 H	288	46.9	45.6
3	#7125.00	68.8 PK	88.2	-19.4	2.68 H	288	61.3	7.5
4	#7125.00	57.1 AV	68.2	-11.1	2.68 H	288	49.6	7.5
5	#14230.00	57.6 PK	88.2	-30.6	1.64 H	243	48.3	9.3
6	#14230.00	45.0 AV	68.2	-23.2	1.64 H	243	35.7	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.6 PK			1.08 V	143	56.0	45.6
2	*7115.00	89.2 AV			1.08 V	143	43.6	45.6
3	#7125.00	65.8 PK	88.2	-22.4	1.08 V	143	58.3	7.5
4	#7125.00	54.9 AV	68.2	-13.3	1.08 V	143	47.4	7.5
5	#14230.00	57.8 PK	88.2	-30.4	1.52 V	322	48.5	9.3
6	#14230.00	45.4 AV	68.2	-22.8	1.52 V	322	36.1	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

106-tone RU

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.3 PK	88.2	-4.9	2.74 H	311	78.9	4.4
2	#5925.00	51.7 AV	68.2	-16.5	2.74 H	311	47.3	4.4
3	*5955.00	118.6 PK			2.74 H	311	76.4	42.2
4	*5955.00	105.4 AV			2.74 H	311	63.2	42.2
5	11910.00	57.0 PK	74.0	-17.0	1.78 H	259	48.4	8.6
6	11910.00	44.9 AV	54.0	-9.1	1.78 H	259	36.3	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.1 PK	88.2	-5.1	1.10 V	138	78.7	4.4
2	#5925.00	52.0 AV	68.2	-16.2	1.10 V	138	47.6	4.4
3	*5955.00	121.9 PK			1.10 V	138	79.7	42.2
4	*5955.00	108.7 AV			1.10 V	138	66.5	42.2
5	11910.00	57.5 PK	74.0	-16.5	1.36 V	309	48.9	8.6
6	11910.00	45.1 AV	54.0	-8.9	1.36 V	309	36.5	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.3 PK			2.78 H	314	75.1	43.2
2	*6195.00	105.6 AV			2.78 H	314	62.4	43.2
3	12390.00	57.4 PK	74.0	-16.6	1.76 H	253	48.5	8.9
4	12390.00	45.3 AV	54.0	-8.7	1.76 H	253	36.4	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.5 PK			1.07 V	144	78.3	43.2
2	*6195.00	108.7 AV			1.07 V	144	65.5	43.2
3	12390.00	57.8 PK	74.0	-16.2	1.38 V	316	48.9	8.9
4	12390.00	45.7 AV	54.0	-8.3	1.38 V	316	36.8	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.5 PK			2.74 H	310	73.9	44.6
2	*6415.00	106.1 AV			2.74 H	310	61.5	44.6
3	#12830.00	57.1 PK	88.2	-31.1	1.57 H	164	47.6	9.5
4	#12830.00	45.2 AV	68.2	-23.0	1.57 H	164	35.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.2 PK			1.10 V	139	76.6	44.6
2	*6415.00	109.7 AV			1.10 V	139	65.1	44.6
3	#12830.00	57.8 PK	88.2	-30.4	1.65 V	2	48.3	9.5
4	#12830.00	45.6 AV	68.2	-22.6	1.65 V	2	36.1	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	103.4 PK			2.58 H	300	58.6	44.8
2	*6435.00	91.4 AV			2.58 H	300	46.6	44.8
3	#12870.00	57.8 PK	88.2	-30.4	1.68 H	265	48.4	9.4
4	#12870.00	45.3 AV	68.2	-22.9	1.68 H	265	35.9	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.7 PK			1.10 V	141	57.9	44.8
2	*6435.00	90.6 AV			1.10 V	141	45.8	44.8
3	#12870.00	57.4 PK	88.2	-30.8	1.59 V	267	48.0	9.4
4	#12870.00	44.9 AV	68.2	-23.3	1.59 V	267	35.5	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.6 PK			2.57 H	301	58.7	44.9
2	*6475.00	91.8 AV			2.57 H	301	46.9	44.9
3	#12950.00	57.4 PK	88.2	-30.8	1.57 H	166	48.2	9.2
4	#12950.00	45.0 AV	68.2	-23.2	1.57 H	166	35.8	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.7 PK			1.10 V	141	57.8	44.9
2	*6475.00	90.3 AV			1.10 V	141	45.4	44.9
3	#12950.00	57.0 PK	88.2	-31.2	1.28 V	274	47.8	9.2
4	#12950.00	44.8 AV	68.2	-23.4	1.28 V	274	35.6	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.5 PK			2.57 H	301	58.5	45.0
2	*6515.00	91.3 AV			2.57 H	301	46.3	45.0
3	#13030.00	57.0 PK	88.2	-31.2	1.69 H	247	48.1	8.9
4	#13030.00	44.5 AV	68.2	-23.7	1.69 H	247	35.6	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.8 PK			1.09 V	141	57.8	45.0
2	*6515.00	90.5 AV			1.09 V	141	45.5	45.0
3	#13030.00	57.6 PK	88.2	-30.6	1.35 V	304	48.7	8.9
4	#13030.00	45.2 AV	68.2	-23.0	1.35 V	304	36.3	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.3 PK			2.60 H	304	74.4	44.9
2	*6535.00	107.7 AV			2.60 H	304	62.8	44.9
3	#13070.00	58.1 PK	88.2	-30.1	1.59 H	297	49.1	9.0
4	#13070.00	45.9 AV	68.2	-22.3	1.59 H	297	36.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.0 PK			1.11 V	144	71.1	44.9
2	*6535.00	104.0 AV			1.11 V	144	59.1	44.9
3	#13070.00	57.7 PK	88.2	-30.5	1.54 V	108	48.7	9.0
4	#13070.00	45.8 AV	68.2	-22.4	1.54 V	108	36.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.4 PK			2.59 H	304	74.4	45.0
2	*6695.00	107.5 AV			2.59 H	304	62.5	45.0
3	13390.00	58.0 PK	74.0	-16.0	1.76 H	257	48.4	9.6
4	13390.00	45.7 AV	54.0	-8.3	1.76 H	257	36.1	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.1 PK			1.11 V	143	71.1	45.0
2	*6695.00	104.2 AV			1.11 V	143	59.2	45.0
3	13390.00	58.3 PK	74.0	-15.7	1.39 V	308	48.7	9.6
4	13390.00	46.1 AV	54.0	-7.9	1.39 V	308	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.9 PK			2.86 H	293	74.6	45.3
2	*6855.00	108.2 AV			2.86 H	293	62.9	45.3
3	#13710.00	57.3 PK	88.2	-30.9	1.66 H	254	48.3	9.0
4	#13710.00	45.1 AV	68.2	-23.1	1.66 H	254	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.7 PK			1.09 V	147	71.4	45.3
2	*6855.00	105.0 AV			1.09 V	147	59.7	45.3
3	#13710.00	57.6 PK	88.2	-30.6	1.31 V	317	48.6	9.0
4	#13710.00	45.5 AV	68.2	-22.7	1.31 V	317	36.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.0 PK			1.07 H	146	55.6	45.4
2	*6875.00	88.6 AV			1.07 H	146	43.2	45.4
3	#13750.00	57.2 PK	88.2	-31.0	1.82 H	261	48.3	8.9
4	#13750.00	44.7 AV	68.2	-23.5	1.82 H	261	35.8	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.2 PK			2.54 V	292	58.8	45.4
2	*6875.00	91.7 AV			2.54 V	292	46.3	45.4
3	#13750.00	57.5 PK	88.2	-30.7	1.43 V	321	48.6	8.9
4	#13750.00	45.2 AV	68.2	-23.0	1.43 V	321	36.3	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.6 PK			2.69 H	288	58.3	45.3
2	*6995.00	91.7 AV			2.69 H	288	46.4	45.3
3	#13990.00	57.7 PK	88.2	-30.5	1.05 H	241	48.2	9.5
4	#13990.00	45.7 AV	68.2	-22.5	1.05 H	241	36.2	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.5 PK			1.08 V	142	56.2	45.3
2	*6995.00	89.6 AV			1.08 V	142	44.3	45.3
3	#13990.00	56.9 PK	88.2	-31.3	1.54 V	6	47.4	9.5
4	#13990.00	45.6 AV	68.2	-22.6	1.54 V	6	36.1	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.9 PK			2.29 H	306	58.3	45.6
2	*7115.00	91.6 AV			2.29 H	306	46.0	45.6
3	#7125.00	67.3 PK	88.2	-20.9	2.29 H	306	59.8	7.5
4	#7125.00	57.3 AV	68.2	-10.9	2.29 H	306	49.8	7.5
5	#14230.00	57.6 PK	88.2	-30.6	1.59 H	167	48.3	9.3
6	#14230.00	45.6 AV	68.2	-22.6	1.59 H	167	36.3	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.7 PK			1.16 V	106	54.1	45.6
2	*7115.00	87.5 AV			1.16 V	106	41.9	45.6
3	#7125.00	65.3 PK	88.2	-22.9	1.16 V	106	57.8	7.5
4	#7125.00	55.6 AV	68.2	-12.6	1.16 V	106	48.1	7.5
5	#14230.00	56.4 PK	88.2	-31.8	1.95 V	278	47.1	9.3
6	#14230.00	44.9 AV	68.2	-23.3	1.95 V	278	35.6	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B

under control of low power indoor AP

2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.1 PK	88.2	-17.1	2.81 H	282	66.7	4.4
2	#5925.00	49.2 AV	68.2	-19.0	2.81 H	282	44.8	4.4
3	*5955.00	112.3 PK			2.81 H	282	70.1	42.2
4	*5955.00	102.8 AV			2.81 H	282	60.6	42.2
5	11910.00	57.1 PK	74.0	-16.9	2.23 H	307	48.5	8.6
6	11910.00	44.3 AV	54.0	-9.7	2.23 H	307	35.7	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.6 PK	88.2	-20.6	1.17 V	135	63.2	4.4
2	#5925.00	49.2 AV	68.2	-19.0	1.17 V	135	44.8	4.4
3	*5955.00	117.1 PK			1.17 V	135	74.9	42.2
4	*5955.00	107.9 AV			1.17 V	135	65.7	42.2
5	11910.00	57.7 PK	74.0	-16.3	1.59 V	239	49.1	8.6
6	11910.00	45.0 AV	54.0	-9.0	1.59 V	239	36.4	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	112.2 PK			2.81 H	282	69.0	43.2
2	*6195.00	102.4 AV			2.81 H	282	59.2	43.2
3	12390.00	57.3 PK	74.0	-16.7	1.00 H	210	48.4	8.9
4	12390.00	45.0 AV	54.0	-9.0	1.00 H	210	36.1	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.0 PK			1.18 V	135	73.8	43.2
2	*6195.00	107.4 AV			1.18 V	135	64.2	43.2
3	12390.00	57.6 PK	74.0	-16.4	1.25 V	157	48.7	8.9
4	12390.00	45.4 AV	54.0	-8.6	1.25 V	157	36.5	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.9 PK			3.05 H	292	69.3	44.6
2	*6415.00	104.2 AV			3.05 H	292	59.6	44.6
3	#12830.00	57.9 PK	88.2	-30.3	2.23 H	302	48.4	9.5
4	#12830.00	45.0 AV	68.2	-23.2	2.23 H	302	35.5	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.7 PK			1.13 V	138	72.1	44.6
2	*6415.00	108.5 AV			1.13 V	138	63.9	44.6
3	#12830.00	58.4 PK	88.2	-29.8	1.62 V	237	48.9	9.5
4	#12830.00	45.8 AV	68.2	-22.4	1.62 V	237	36.3	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.6 PK			2.82 H	289	55.8	44.8
2	*6435.00	90.6 AV			2.82 H	289	45.8	44.8
3	#12870.00	57.7 PK	88.2	-30.5	2.17 H	301	48.3	9.4
4	#12870.00	44.9 AV	68.2	-23.3	2.17 H	301	35.5	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	98.5 PK			1.13 V	138	53.7	44.8
2	*6435.00	89.1 AV			1.13 V	138	44.3	44.8
3	#12870.00	58.1 PK	88.2	-30.1	1.55 V	242	48.7	9.4
4	#12870.00	45.6 AV	68.2	-22.6	1.55 V	242	36.2	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	100.2 PK			2.82 H	289	55.3	44.9
2	*6475.00	90.4 AV			2.82 H	289	45.5	44.9
3	#12950.00	57.5 PK	88.2	-30.7	1.59 H	345	48.3	9.2
4	#12950.00	45.3 AV	68.2	-22.9	1.59 H	345	36.1	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	98.2 PK			1.13 V	141	53.3	44.9
2	*6475.00	88.4 AV			1.13 V	141	43.5	44.9
3	#12950.00	57.1 PK	88.2	-31.1	1.56 V	329	47.9	9.2
4	#12950.00	44.3 AV	68.2	-23.9	1.56 V	329	35.1	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.7 PK			2.82 H	290	55.7	45.0
2	*6515.00	90.8 AV			2.82 H	290	45.8	45.0
3	#13030.00	58.2 PK	88.2	-30.0	1.27 H	21	49.3	8.9
4	#13030.00	45.9 AV	68.2	-22.3	1.27 H	21	37.0	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	98.6 PK			1.14 V	139	53.6	45.0
2	*6515.00	88.7 AV			1.14 V	139	43.7	45.0
3	#13030.00	58.0 PK	88.2	-30.2	1.57 V	105	49.1	8.9
4	#13030.00	45.7 AV	68.2	-22.5	1.57 V	105	36.8	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.5 PK			2.60 H	295	72.6	44.9
2	*6535.00	107.8 AV			2.60 H	295	62.9	44.9
3	#13070.00	58.1 PK	88.2	-30.1	1.55 H	345	49.1	9.0
4	#13070.00	45.7 AV	68.2	-22.5	1.55 H	345	36.7	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.4 PK			1.02 V	150	69.5	44.9
2	*6535.00	104.3 AV			1.02 V	150	59.4	44.9
3	#13070.00	57.5 PK	88.2	-30.7	1.85 V	29	48.5	9.0
4	#13070.00	44.7 AV	68.2	-23.5	1.85 V	29	35.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.6 PK			2.60 H	296	72.6	45.0
2	*6695.00	107.6 AV			2.60 H	296	62.6	45.0
3	13390.00	58.0 PK	74.0	-16.0	2.16 H	308	48.4	9.6
4	13390.00	45.3 AV	54.0	-8.7	2.16 H	308	35.7	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.2 PK			1.02 V	150	69.2	45.0
2	*6695.00	104.6 AV			1.02 V	150	59.6	45.0
3	13390.00	58.6 PK	74.0	-15.4	1.62 V	235	49.0	9.6
4	13390.00	46.0 AV	54.0	-8.0	1.62 V	235	36.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.4 PK			2.60 H	295	72.1	45.3
2	*6855.00	107.8 AV			2.60 H	295	62.5	45.3
3	#13710.00	57.8 PK	88.2	-30.4	1.65 H	291	48.8	9.0
4	#13710.00	45.8 AV	68.2	-22.4	1.65 H	291	36.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.1 PK			1.02 V	150	68.8	45.3
2	*6855.00	104.3 AV			1.02 V	150	59.0	45.3
3	#13710.00	57.6 PK	88.2	-30.6	1.57 V	190	48.6	9.0
4	#13710.00	45.1 AV	68.2	-23.1	1.57 V	190	36.1	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.8 PK			2.90 H	290	54.4	45.4
2	*6875.00	89.7 AV			2.90 H	290	44.3	45.4
3	#13750.00	57.8 PK	88.2	-30.4	1.57 H	189	48.9	8.9
4	#13750.00	45.5 AV	68.2	-22.7	1.57 H	189	36.6	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.8 PK			1.09 V	60	51.4	45.4
2	*6875.00	86.5 AV			1.09 V	60	41.1	45.4
3	#13750.00	57.2 PK	88.2	-31.0	1.57 V	141	48.3	8.9
4	#13750.00	44.7 AV	68.2	-23.5	1.57 V	141	35.8	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.8 PK			2.90 H	287	54.5	45.3
2	*6995.00	89.6 AV			2.90 H	287	44.3	45.3
3	#13990.00	57.8 PK	88.2	-30.4	1.99 H	26	48.3	9.5
4	#13990.00	45.6 AV	68.2	-22.6	1.99 H	26	36.1	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	96.6 PK			1.09 V	62	51.3	45.3
2	*6995.00	86.9 AV			1.09 V	62	41.6	45.3
3	#13990.00	57.2 PK	88.2	-31.0	1.52 V	151	47.7	9.5
4	#13990.00	44.9 AV	68.2	-23.3	1.52 V	151	35.4	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.9 PK			2.89 H	291	54.3	45.6
2	*7115.00	90.2 AV			2.89 H	291	44.6	45.6
3	#7125.00	66.8 PK	88.2	-21.4	2.89 H	291	59.3	7.5
4	#7125.00	51.1 AV	68.2	-17.1	2.89 H	291	43.6	7.5
5	#14230.00	57.5 PK	88.2	-30.7	2.16 H	302	48.2	9.3
6	#14230.00	44.7 AV	68.2	-23.5	2.16 H	302	35.4	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	96.4 PK			1.08 V	61	50.8	45.6
2	*7115.00	86.7 AV			1.08 V	61	41.1	45.6
3	#7125.00	63.2 PK	88.2	-25.0	1.08 V	61	55.7	7.5
4	#7125.00	49.4 AV	68.2	-18.8	1.08 V	61	41.9	7.5
5	#14230.00	58.1 PK	88.2	-30.1	1.53 V	236	48.8	9.3
6	#14230.00	45.6 AV	68.2	-22.6	1.53 V	236	36.3	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.8 PK	88.2	-14.4	2.81 H	281	69.4	4.4
2	#5925.00	55.1 AV	68.2	-13.1	2.81 H	281	50.7	4.4
3	*5955.00	116.5 PK			2.81 H	281	74.3	42.2
4	*5955.00	104.5 AV			2.81 H	281	62.3	42.2
5	11910.00	57.2 PK	74.0	-16.8	2.32 H	312	48.6	8.6
6	11910.00	44.4 AV	54.0	-9.6	2.32 H	312	35.8	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.9 PK	88.2	-12.3	1.06 V	170	71.5	4.4
2	#5925.00	59.7 AV	68.2	-8.5	1.06 V	170	55.3	4.4
3	*5955.00	121.0 PK			1.06 V	170	78.8	42.2
4	*5955.00	108.5 AV			1.06 V	170	66.3	42.2
5	11910.00	57.9 PK	74.0	-16.1	1.54 V	241	49.3	8.6
6	11910.00	45.3 AV	54.0	-8.7	1.54 V	241	36.7	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.9 PK			2.86 H	296	73.7	43.2
2	*6195.00	105.1 AV			2.86 H	296	61.9	43.2
3	12390.00	57.4 PK	74.0	-16.6	2.23 H	307	48.5	8.9
4	12390.00	44.5 AV	54.0	-9.5	2.23 H	307	35.6	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.8 PK			1.13 V	144	77.6	43.2
2	*6195.00	108.5 AV			1.13 V	144	65.3	43.2
3	12390.00	58.1 PK	74.0	-15.9	1.54 V	232	49.2	8.9
4	12390.00	45.5 AV	54.0	-8.5	1.54 V	232	36.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.8 PK			2.86 H	296	72.2	44.6
2	*6415.00	105.4 AV			2.86 H	296	60.8	44.6
3	#12830.00	57.1 PK	88.2	-31.1	1.05 H	165	47.6	9.5
4	#12830.00	44.2 AV	68.2	-24.0	1.05 H	165	34.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.5 PK			1.13 V	142	75.9	44.6
2	*6415.00	109.7 AV			1.13 V	142	65.1	44.6
3	#12830.00	57.3 PK	88.2	-30.9	1.68 V	222	47.8	9.5
4	#12830.00	44.5 AV	68.2	-23.7	1.68 V	222	35.0	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	103.1 PK			2.97 H	289	58.3	44.8
2	*6435.00	90.7 AV			2.97 H	289	45.9	44.8
3	#12870.00	57.6 PK	88.2	-30.6	2.28 H	311	48.2	9.4
4	#12870.00	44.7 AV	68.2	-23.5	2.28 H	311	35.3	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.7 PK			1.09 V	137	56.9	44.8
2	*6435.00	89.3 AV			1.09 V	137	44.5	44.8
3	#12870.00	58.1 PK	88.2	-30.1	1.63 V	247	48.7	9.4
4	#12870.00	45.8 AV	68.2	-22.4	1.63 V	247	36.4	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.5 PK			2.98 H	290	57.6	44.9
2	*6475.00	91.4 AV			2.98 H	290	46.5	44.9
3	#12950.00	57.6 PK	88.2	-30.6	1.55 H	187	48.4	9.2
4	#12950.00	45.3 AV	68.2	-22.9	1.55 H	187	36.1	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.4 PK			1.09 V	138	56.5	44.9
2	*6475.00	90.6 AV			1.09 V	138	45.7	44.9
3	#12950.00	57.4 PK	88.2	-30.8	1.56 V	297	48.2	9.2
4	#12950.00	44.9 AV	68.2	-23.3	1.56 V	297	35.7	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.1 PK			2.98 H	291	58.1	45.0
2	*6515.00	92.4 AV			2.98 H	291	47.4	45.0
3	#13030.00	57.7 PK	88.2	-30.5	2.00 H	170	48.8	8.9
4	#13030.00	45.8 AV	68.2	-22.4	2.00 H	170	36.9	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.2 PK			1.09 V	138	56.2	45.0
2	*6515.00	90.3 AV			1.09 V	138	45.3	45.0
3	#13030.00	57.4 PK	88.2	-30.8	1.64 V	159	48.5	8.9
4	#13030.00	45.1 AV	68.2	-23.1	1.64 V	159	36.2	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.8 PK			2.87 H	288	75.9	44.9
2	*6535.00	109.3 AV			2.87 H	288	64.4	44.9
3	#13070.00	57.7 PK	88.2	-30.5	2.26 H	318	48.7	9.0
4	#13070.00	44.9 AV	68.2	-23.3	2.26 H	318	35.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.6 PK			1.00 V	146	73.7	44.9
2	*6535.00	107.1 AV			1.00 V	146	62.2	44.9
3	#13070.00	58.3 PK	88.2	-29.9	1.61 V	245	49.3	9.0
4	#13070.00	45.8 AV	68.2	-22.4	1.61 V	245	36.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.4 PK			2.81 H	286	76.4	45.0
2	*6695.00	109.1 AV			2.81 H	286	64.1	45.0
3	13390.00	58.3 PK	74.0	-15.7	2.27 H	309	48.7	9.6
4	13390.00	45.3 AV	54.0	-8.7	2.27 H	309	35.7	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.4 PK			1.01 V	149	73.4	45.0
2	*6695.00	106.9 AV			1.01 V	149	61.9	45.0
3	13390.00	58.8 PK	74.0	-15.2	1.53 V	236	49.2	9.6
4	13390.00	46.2 AV	54.0	-7.8	1.53 V	236	36.6	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.4 PK			2.81 H	285	75.1	45.3
2	*6855.00	109.7 AV			2.81 H	285	64.4	45.3
3	#13710.00	58.2 PK	88.2	-30.0	1.17 H	278	49.2	9.0
4	#13710.00	45.6 AV	68.2	-22.6	1.17 H	278	36.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.8 PK			1.01 V	145	72.5	45.3
2	*6855.00	106.5 AV			1.01 V	145	61.2	45.3
3	#13710.00	57.7 PK	88.2	-30.5	1.64 V	290	48.7	9.0
4	#13710.00	45.6 AV	68.2	-22.6	1.64 V	290	36.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.5 PK			2.60 H	280	57.1	45.4
2	*6875.00	90.7 AV			2.60 H	280	45.3	45.4
3	#13750.00	57.3 PK	88.2	-30.9	2.16 H	303	48.4	8.9
4	#13750.00	44.4 AV	68.2	-23.8	2.16 H	303	35.5	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.2 PK			1.03 V	67	53.8	45.4
2	*6875.00	87.5 AV			1.03 V	67	42.1	45.4
3	#13750.00	57.6 PK	88.2	-30.6	1.58 V	233	48.7	8.9
4	#13750.00	45.2 AV	68.2	-23.0	1.58 V	233	36.3	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.4 PK			2.60 H	281	57.1	45.3
2	*6995.00	91.4 AV			2.60 H	281	46.1	45.3
3	#13990.00	57.1 PK	88.2	-31.1	1.15 H	167	47.6	9.5
4	#13990.00	44.2 AV	68.2	-24.0	1.15 H	167	34.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.2 PK			1.03 V	67	53.9	45.3
2	*6995.00	88.6 AV			1.03 V	67	43.3	45.3
3	#13990.00	57.5 PK	88.2	-30.7	1.57 V	1	48.0	9.5
4	#13990.00	44.9 AV	68.2	-23.3	1.57 V	1	35.4	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.5 PK			2.53 H	294	57.9	45.6
2	*7115.00	89.9 AV			2.53 H	294	44.3	45.6
3	#7125.00	66.5 PK	88.2	-21.7	2.53 H	294	59.0	7.5
4	#7125.00	56.8 AV	68.2	-11.4	2.53 H	294	49.3	7.5
5	#14230.00	57.6 PK	88.2	-30.6	1.65 H	49	48.3	9.3
6	#14230.00	44.9 AV	68.2	-23.3	1.65 H	49	35.6	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.9 PK			1.16 V	107	54.3	45.6
2	*7115.00	86.5 AV			1.16 V	107	40.9	45.6
3	#7125.00	62.5 PK	88.2	-25.7	1.16 V	107	55.0	7.5
4	#7125.00	53.9 AV	68.2	-14.3	1.16 V	107	46.4	7.5
5	#14230.00	57.4 PK	88.2	-30.8	2.33 V	241	48.1	9.3
6	#14230.00	44.6 AV	68.2	-23.6	2.33 V	241	35.3	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.4 PK	88.2	-7.8	2.38 H	228	76.0	4.4
2	#5925.00	61.6 AV	68.2	-6.6	2.38 H	228	57.2	4.4
3	*5965.00	111.1 PK			2.38 H	228	68.9	42.2
4	*5965.00	98.7 AV			2.38 H	228	56.5	42.2
5	11930.00	57.1 PK	74.0	-16.9	1.32 H	237	48.5	8.6
6	11930.00	44.5 AV	54.0	-9.5	1.32 H	237	35.9	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.5 PK	88.2	-9.7	1.16 V	107	74.1	4.4
2	#5925.00	59.0 AV	68.2	-9.2	1.16 V	107	54.6	4.4
3	*5965.00	108.6 PK			1.16 V	107	66.4	42.2
4	*5965.00	96.3 AV			1.16 V	107	54.1	42.2
5	11930.00	56.8 PK	74.0	-17.2	2.25 V	74	48.2	8.6
6	11930.00	44.0 AV	54.0	-10.0	2.25 V	74	35.4	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.9 PK			2.42 H	216	71.6	43.3
2	*6205.00	102.4 AV			2.42 H	216	59.1	43.3
3	12410.00	57.4 PK	74.0	-16.6	2.10 H	112	48.6	8.8
4	12410.00	44.6 AV	54.0	-9.4	2.10 H	112	35.8	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	112.4 PK			1.16 V	101	69.1	43.3
2	*6205.00	100.1 AV			1.16 V	101	56.8	43.3
3	12410.00	57.1 PK	74.0	-16.9	2.48 V	104	48.3	8.8
4	12410.00	44.4 AV	54.0	-9.6	2.48 V	104	35.6	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.4 PK			3.07 H	294	69.9	44.5
2	*6405.00	102.6 AV			3.07 H	294	58.1	44.5
3	#12810.00	58.0 PK	88.2	-30.2	2.28 H	312	48.4	9.6
4	#12810.00	45.1 AV	68.2	-23.1	2.28 H	312	35.5	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	118.6 PK			1.04 V	143	74.1	44.5
2	*6405.00	106.8 AV			1.04 V	143	62.3	44.5
3	#12810.00	58.7 PK	88.2	-29.5	1.57 V	236	49.1	9.6
4	#12810.00	46.0 AV	68.2	-22.2	1.57 V	236	36.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.4 PK			2.35 H	316	57.6	44.8
2	*6445.00	90.1 AV			2.35 H	316	45.3	44.8
3	#12890.00	57.8 PK	88.2	-30.4	2.15 H	57	48.5	9.3
4	#12890.00	45.0 AV	68.2	-23.2	2.15 H	57	35.7	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	100.8 PK			1.07 V	144	56.0	44.8
2	*6445.00	88.5 AV			1.07 V	144	43.7	44.8
3	#12890.00	57.9 PK	88.2	-30.3	2.26 V	182	48.6	9.3
4	#12890.00	45.2 AV	68.2	-23.0	2.26 V	182	35.9	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	102.9 PK			2.35 H	309	58.0	44.9
2	*6485.00	90.7 AV			2.35 H	309	45.8	44.9
3	#12970.00	57.1 PK	88.2	-31.1	1.90 H	81	48.1	9.0
4	#12970.00	44.5 AV	68.2	-23.7	1.90 H	81	35.5	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	101.3 PK			1.08 V	142	56.4	44.9
2	*6485.00	89.0 AV			1.08 V	142	44.1	44.9
3	#12970.00	57.3 PK	88.2	-30.9	2.94 V	184	48.3	9.0
4	#12970.00	44.6 AV	68.2	-23.6	2.94 V	184	35.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	102.7 PK			2.35 H	316	57.8	44.9
2	*6525.00	90.4 AV			2.35 H	316	45.5	44.9
3	#13050.00	57.2 PK	88.2	-31.0	2.21 H	303	48.3	8.9
4	#13050.00	44.3 AV	68.2	-23.9	2.21 H	303	35.4	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	101.0 PK			1.05 V	144	56.1	44.9
2	*6525.00	88.8 AV			1.05 V	144	43.9	44.9
3	#13050.00	57.7 PK	88.2	-30.5	1.67 V	244	48.8	8.9
4	#13050.00	45.2 AV	68.2	-23.0	1.67 V	244	36.3	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	119.3 PK			2.85 H	287	74.4	44.9
2	*6565.00	106.9 AV			2.85 H	287	62.0	44.9
3	#13130.00	57.4 PK	88.2	-30.8	2.19 H	301	48.4	9.0
4	#13130.00	44.6 AV	68.2	-23.6	2.19 H	301	35.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	117.3 PK			1.09 V	147	72.4	44.9
2	*6565.00	104.8 AV			1.09 V	147	59.9	44.9
3	#13130.00	57.9 PK	88.2	-30.3	1.59 V	241	48.9	9.0
4	#13130.00	45.6 AV	68.2	-22.6	1.59 V	241	36.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	119.1 PK			2.85 H	276	74.1	45.0
2	*6685.00	106.8 AV			2.85 H	276	61.8	45.0
3	13370.00	58.0 PK	74.0	-16.0	1.61 H	158	48.5	9.5
4	13370.00	45.2 AV	54.0	-8.8	1.61 H	158	35.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	116.9 PK			1.05 V	152	71.9	45.0
2	*6685.00	104.5 AV			1.05 V	152	59.5	45.0
3	13370.00	58.1 PK	74.0	-15.9	2.51 V	104	48.6	9.5
4	13370.00	45.3 AV	54.0	-8.7	2.51 V	104	35.8	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	117.6 PK			2.88 H	284	72.3	45.3
2	*6845.00	105.9 AV			2.88 H	284	60.6	45.3
3	#13690.00	57.3 PK	88.2	-30.9	2.24 H	309	48.2	9.1
4	#13690.00	44.3 AV	68.2	-23.9	2.24 H	309	35.2	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.9 PK			1.14 V	68	69.6	45.3
2	*6845.00	103.2 AV			1.14 V	68	57.9	45.3
3	#13690.00	57.8 PK	88.2	-30.4	1.55 V	244	48.7	9.1
4	#13690.00	45.4 AV	68.2	-22.8	1.55 V	244	36.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	102.6 PK			2.82 H	281	57.2	45.4
2	*6885.00	91.1 AV			2.82 H	281	45.7	45.4
3	#13770.00	57.0 PK	88.2	-31.2	2.14 H	308	48.2	8.8
4	#13770.00	44.0 AV	68.2	-24.2	2.14 H	308	35.2	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	99.7 PK			1.09 V	67	54.3	45.4
2	*6885.00	87.3 AV			1.09 V	67	41.9	45.4
3	#13770.00	57.5 PK	88.2	-30.7	1.68 V	232	48.7	8.8
4	#13770.00	44.9 AV	68.2	-23.3	1.68 V	232	36.1	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	102.6 PK			2.75 H	290	57.3	45.3
2	*6965.00	91.0 AV			2.75 H	290	45.7	45.3
3	#13930.00	57.6 PK	88.2	-30.6	2.11 H	158	48.4	9.2
4	#13930.00	44.8 AV	68.2	-23.4	2.11 H	158	35.6	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	99.8 PK			1.12 V	65	54.5	45.3
2	*6965.00	87.4 AV			1.12 V	65	42.1	45.3
3	#13930.00	57.4 PK	88.2	-30.8	1.74 V	162	48.2	9.2
4	#13930.00	44.7 AV	68.2	-23.5	1.74 V	162	35.5	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	104.2 PK			2.53 H	294	58.6	45.6
2	*7085.00	89.6 AV			2.53 H	294	44.0	45.6
3	#7125.00	61.6 PK	88.2	-26.6	2.53 H	294	54.1	7.5
4	#7125.00	49.6 AV	68.2	-18.6	2.53 H	294	42.1	7.5
5	#14170.00	57.9 PK	88.2	-30.3	2.01 H	153	48.7	9.2
6	#14170.00	45.1 AV	68.2	-23.1	2.01 H	153	35.9	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	99.5 PK			1.16 V	107	53.9	45.6
2	*7085.00	85.2 AV			1.16 V	107	39.6	45.6
3	#7125.00	62.3 PK	88.2	-25.9	1.16 V	107	54.8	7.5
4	#7125.00	49.0 AV	68.2	-19.2	1.16 V	107	41.5	7.5
5	#14170.00	57.3 PK	88.2	-30.9	1.66 V	145	48.1	9.2
6	#14170.00	44.6 AV	68.2	-23.6	1.66 V	145	35.4	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.9 PK	88.2	-14.3	2.37 H	228	69.5	4.4
2	#5925.00	50.7 AV	68.2	-17.5	2.37 H	228	46.3	4.4
3	*5985.00	108.0 PK			2.37 H	228	65.8	42.2
4	*5985.00	94.2 AV			2.37 H	228	52.0	42.2
5	11970.00	57.2 PK	74.0	-16.8	1.56 H	75	48.6	8.6
6	11970.00	44.4 AV	54.0	-9.6	1.56 H	75	35.8	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.0 PK	88.2	-17.2	1.16 V	107	66.6	4.4
2	#5925.00	49.4 AV	68.2	-18.8	1.16 V	107	45.0	4.4
3	*5985.00	105.2 PK			1.16 V	107	63.0	42.2
4	*5985.00	92.3 AV			1.16 V	107	50.1	42.2
5	11970.00	56.4 PK	74.0	-17.6	2.54 V	118	47.8	8.6
6	11970.00	41.7 AV	54.0	-12.3	2.54 V	118	33.1	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	111.2 PK			2.32 H	317	67.8	43.4
2	*6225.00	99.5 AV			2.32 H	317	56.1	43.4
3	12450.00	57.0 PK	74.0	-17.0	2.27 H	304	48.4	8.6
4	12450.00	44.1 AV	54.0	-9.9	2.27 H	304	35.5	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	116.2 PK			1.13 V	141	72.8	43.4
2	*6225.00	103.6 AV			1.13 V	141	60.2	43.4
3	12450.00	57.5 PK	74.0	-16.5	1.62 V	248	48.9	8.6
4	12450.00	45.0 AV	54.0	-9.0	1.62 V	248	36.4	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.6 PK			2.33 H	312	68.2	44.4
2	*6385.00	100.4 AV			2.33 H	312	56.0	44.4
3	#12770.00	57.9 PK	88.2	-30.3	2.17 H	303	48.3	9.6
4	#12770.00	44.8 AV	68.2	-23.4	2.17 H	303	35.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	116.5 PK			1.00 V	140	72.1	44.4
2	*6385.00	104.5 AV			1.00 V	140	60.1	44.4
3	#12770.00	58.2 PK	88.2	-30.0	1.57 V	235	48.6	9.6
4	#12770.00	45.8 AV	68.2	-22.4	1.57 V	235	36.2	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.2 PK			2.29 H	317	58.3	44.9
2	*6465.00	90.7 AV			2.29 H	317	45.8	44.9
3	#12930.00	57.2 PK	88.2	-31.0	2.15 H	301	48.1	9.1
4	#12930.00	44.6 AV	68.2	-23.6	2.15 H	301	35.5	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	101.6 PK			1.03 V	146	56.7	44.9
2	*6465.00	88.8 AV			1.03 V	146	43.9	44.9
3	#12930.00	57.7 PK	88.2	-30.5	1.62 V	3	48.6	9.1
4	#12930.00	44.9 AV	68.2	-23.3	1.62 V	3	35.8	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	103.3 PK			2.32 H	311	58.4	44.9
2	*6545.00	90.7 AV			2.32 H	311	45.8	44.9
3	#13090.00	57.5 PK	88.2	-30.7	1.96 H	223	48.5	9.0
4	#13090.00	44.8 AV	68.2	-23.4	1.96 H	223	35.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	101.8 PK			1.06 V	142	56.9	44.9
2	*6545.00	89.0 AV			1.06 V	142	44.1	44.9
3	#13090.00	58.0 PK	88.2	-30.2	2.26 V	185	49.0	9.0
4	#13090.00	45.3 AV	68.2	-22.9	2.26 V	185	36.3	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	115.2 PK			2.96 H	284	70.3	44.9
2	*6625.00	103.4 AV			2.96 H	284	58.5	44.9
3	13250.00	58.2 PK	74.0	-15.8	2.33 H	194	49.1	9.1
4	13250.00	45.4 AV	54.0	-8.6	2.33 H	194	36.3	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.8 PK			1.32 V	135	67.9	44.9
2	*6625.00	101.2 AV			1.32 V	135	56.3	44.9
3	13250.00	57.0 PK	74.0	-17.0	1.22 V	253	47.9	9.1
4	13250.00	44.3 AV	54.0	-9.7	1.22 V	253	35.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	115.1 PK			2.97 H	288	70.1	45.0
2	*6705.00	103.4 AV			2.97 H	288	58.4	45.0
3	#13410.00	57.8 PK	88.2	-30.4	2.17 H	308	48.1	9.7
4	#13410.00	44.9 AV	68.2	-23.3	2.17 H	308	35.2	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.7 PK			1.02 V	146	67.7	45.0
2	*6705.00	101.1 AV			1.02 V	146	56.1	45.0
3	#13410.00	58.0 PK	88.2	-30.2	1.57 V	240	48.3	9.7
4	#13410.00	45.0 AV	68.2	-23.2	1.57 V	240	35.3	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	115.2 PK			2.77 H	285	70.2	45.0
2	*6785.00	102.6 AV			2.77 H	285	57.6	45.0
3	#13570.00	57.6 PK	88.2	-30.6	2.22 H	308	48.6	9.0
4	#13570.00	45.3 AV	68.2	-22.9	2.22 H	308	36.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.7 PK			1.03 V	146	67.7	45.0
2	*6785.00	100.3 AV			1.03 V	146	55.3	45.0
3	#13570.00	57.6 PK	88.2	-30.6	1.56 V	234	48.6	9.0
4	#13570.00	45.4 AV	68.2	-22.8	1.56 V	234	36.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	101.9 PK			2.74 H	286	56.5	45.4
2	*6865.00	90.1 AV			2.74 H	286	44.7	45.4
3	#13730.00	57.2 PK	88.2	-31.0	2.01 H	177	48.3	8.9
4	#13730.00	44.4 AV	68.2	-23.8	2.01 H	177	35.5	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	98.5 PK			1.07 V	152	53.1	45.4
2	*6865.00	86.7 AV			1.07 V	152	41.3	45.4
3	#13730.00	57.7 PK	88.2	-30.5	1.29 V	165	48.8	8.9
4	#13730.00	47.9 AV	68.2	-20.3	1.29 V	165	39.0	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	102.0 PK			2.69 H	254	56.7	45.3
2	*6945.00	90.1 AV			2.69 H	254	44.8	45.3
3	#13890.00	57.3 PK	88.2	-30.9	2.45 H	183	48.3	9.0
4	#13890.00	44.6 AV	68.2	-23.6	2.45 H	183	35.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	98.5 PK			1.04 V	131	53.2	45.3
2	*6945.00	86.7 AV			1.04 V	131	41.4	45.3
3	#13890.00	56.9 PK	88.2	-31.3	2.65 V	107	47.9	9.0
4	#13890.00	44.2 AV	68.2	-24.0	2.65 V	107	35.2	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	102.5 PK			2.74 H	282	57.0	45.5
2	*7025.00	90.6 AV			2.74 H	282	45.1	45.5
3	#7125.00	62.9 PK	88.2	-25.3	2.21 H	309	55.4	7.5
4	#7125.00	49.6 AV	68.2	-18.6	2.21 H	309	42.1	7.5
5	#14050.00	57.7 PK	88.2	-30.5	2.23 H	308	48.3	9.4
6	#14050.00	44.8 AV	68.2	-23.4	2.23 H	308	35.4	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	99.1 PK			1.04 V	138	53.6	45.5
2	*7025.00	87.3 AV			1.04 V	138	41.8	45.5
3	#7125.00	62.7 PK	88.2	-25.5	1.04 V	138	55.2	7.5
4	#7125.00	49.2 AV	68.2	-19.0	1.04 V	138	41.7	7.5
5	#14050.00	58.0 PK	88.2	-30.2	1.52 V	228	48.6	9.4
6	#14050.00	45.2 AV	68.2	-23.0	1.52 V	228	35.8	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5890.00	86.1 PK	88.2	-2.1	2.31 H	311	81.8	4.3
2	#5890.00	59.9 AV	68.2	-8.3	2.31 H	311	55.6	4.3
3	*6025.00	104.3 PK			2.31 H	311	62.0	42.3
4	*6025.00	91.7 AV			2.31 H	311	49.4	42.3
5	12050.00	56.7 PK	74.0	-17.3	2.27 H	312	48.1	8.6
6	12050.00	43.9 AV	54.0	-10.1	2.27 H	312	35.3	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5890.00	87.9 PK	88.2	-0.3	1.07 V	152	83.6	4.3
2	#5890.00	64.9 AV	68.2	-3.3	1.07 V	152	60.6	4.3
3	*6025.00	108.1 PK			1.07 V	152	65.8	42.3
4	*6025.00	95.5 AV			1.07 V	152	53.2	42.3
5	12050.00	57.0 PK	74.0	-17.0	1.54 V	237	48.4	8.6
6	12050.00	44.7 AV	54.0	-9.3	1.54 V	237	36.1	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.4 PK			2.32 H	304	62.2	43.2
2	*6185.00	92.8 AV			2.32 H	304	49.6	43.2
3	12370.00	56.4 PK	74.0	-17.6	2.12 H	68	47.6	8.8
4	12370.00	43.7 AV	54.0	-10.3	2.12 H	68	34.9	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.2 PK			1.07 V	154	66.0	43.2
2	*6185.00	96.7 AV			1.07 V	154	53.5	43.2
3	12370.00	57.0 PK	74.0	-17.0	2.51 V	149	48.2	8.8
4	12370.00	44.2 AV	54.0	-9.8	2.51 V	149	35.4	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.2 PK			2.26 H	310	61.0	44.2
2	*6345.00	92.5 AV			2.26 H	310	48.3	44.2
3	12690.00	57.5 PK	74.0	-16.5	1.51 H	284	47.9	9.6
4	12690.00	44.8 AV	54.0	-9.2	1.51 H	284	35.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	108.8 PK			1.12 V	168	64.6	44.2
2	*6345.00	96.3 AV			1.12 V	168	52.1	44.2
3	12690.00	58.1 PK	74.0	-15.9	2.61 V	122	48.5	9.6
4	12690.00	45.3 AV	54.0	-8.7	2.61 V	122	35.7	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.0 PK			2.76 H	309	58.0	45.0
2	*6505.00	90.6 AV			2.76 H	309	45.6	45.0
3	#13010.00	57.4 PK	88.2	-30.8	1.64 H	248	48.6	8.8
4	#13010.00	45.0 AV	68.2	-23.2	1.64 H	248	36.2	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	101.5 PK			1.03 V	138	56.5	45.0
2	*6505.00	89.1 AV			1.03 V	138	44.1	45.0
3	#13010.00	56.8 PK	88.2	-31.4	2.25 V	308	48.0	8.8
4	#13010.00	43.9 AV	68.2	-24.3	2.25 V	308	35.1	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.3 PK			2.77 H	287	62.3	45.0
2	*6665.00	95.6 AV			2.77 H	287	50.6	45.0
3	13330.00	56.9 PK	74.0	-17.1	2.17 H	312	47.7	9.2
4	13330.00	44.5 AV	54.0	-9.5	2.17 H	312	35.3	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.3 PK			1.06 V	110	60.3	45.0
2	*6665.00	93.5 AV			1.06 V	110	48.5	45.0
3	13330.00	57.6 PK	74.0	-16.4	1.57 V	245	48.4	9.2
4	13330.00	45.2 AV	54.0	-8.8	1.57 V	245	36.0	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	103.5 PK			2.75 H	284	58.4	45.1
2	*6825.00	90.8 AV			2.75 H	284	45.7	45.1
3	#13650.00	57.4 PK	88.2	-30.8	1.52 H	174	48.4	9.0
4	#13650.00	44.6 AV	68.2	-23.6	1.52 H	174	35.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	99.8 PK			1.08 V	135	54.7	45.1
2	*6825.00	87.2 AV			1.08 V	135	42.1	45.1
3	#13650.00	57.2 PK	88.2	-31.0	2.06 V	128	48.2	9.0
4	#13650.00	44.5 AV	68.2	-23.7	2.06 V	128	35.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.5 PK			2.79 H	280	58.2	45.3
2	*6985.00	90.9 AV			2.79 H	280	45.6	45.3
3	#7125.00	73.4 PK	88.2	-14.8	2.79 H	280	65.9	7.5
4	#7125.00	54.5 AV	68.2	-13.7	2.79 H	280	47.0	7.5
5	#13970.00	57.3 PK	88.2	-30.9	2.31 H	309	47.8	9.5
6	#13970.00	45.2 AV	68.2	-23.0	2.31 H	309	35.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	100.1 PK			1.09 V	135	54.8	45.3
2	*6985.00	87.5 AV			1.09 V	135	42.2	45.3
3	#7125.00	70.9 PK	88.2	-17.3	1.09 V	135	63.4	7.5
4	#7125.00	52.8 AV	68.2	-15.4	1.09 V	135	45.3	7.5
5	#13970.00	57.6 PK	88.2	-30.6	1.56 V	234	48.1	9.5
6	#13970.00	45.4 AV	68.2	-22.8	1.56 V	234	35.9	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Partial RU_2TX

26-tone RU

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.6 PK	88.2	-28.6	2.38 H	228	55.2	4.4
2	#5925.00	46.7 AV	68.2	-21.5	2.38 H	228	42.3	4.4
3	*5955.00	115.8 PK			2.38 H	228	73.6	42.2
4	*5955.00	103.4 AV			2.38 H	228	61.2	42.2
5	11910.00	57.2 PK	74.0	-16.8	2.51 H	183	48.6	8.6
6	11910.00	44.4 AV	54.0	-9.6	2.51 H	183	35.8	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.5 PK	88.2	-27.7	2.14 V	195	56.1	4.4
2	#5925.00	46.9 AV	68.2	-21.3	2.14 V	195	42.5	4.4
3	*5955.00	120.2 PK			2.14 V	195	78.0	42.2
4	*5955.00	106.8 AV			2.14 V	195	64.6	42.2
5	11910.00	57.3 PK	74.0	-16.7	2.21 V	157	48.7	8.6
6	11910.00	44.5 AV	54.0	-9.5	2.21 V	157	35.9	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.4 PK			2.87 H	299	73.2	43.2
2	*6195.00	104.8 AV			2.87 H	299	61.6	43.2
3	12390.00	57.5 PK	74.0	-16.5	2.32 H	304	48.6	8.9
4	12390.00	44.6 AV	54.0	-9.4	2.32 H	304	35.7	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.5 PK			1.12 V	139	76.3	43.2
2	*6195.00	108.1 AV			1.12 V	139	64.9	43.2
3	12390.00	58.2 PK	74.0	-15.8	1.59 V	241	49.3	8.9
4	12390.00	45.6 AV	54.0	-8.4	1.59 V	241	36.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.1 PK			2.32 H	318	71.5	44.6
2	*6415.00	104.8 AV			2.32 H	318	60.2	44.6
3	#12830.00	57.9 PK	88.2	-30.3	2.37 H	307	48.4	9.5
4	#12830.00	45.3 AV	68.2	-22.9	2.37 H	307	35.8	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.1 PK			1.09 V	141	74.5	44.6
2	*6415.00	107.9 AV			1.09 V	141	63.3	44.6
3	#12830.00	58.4 PK	88.2	-29.8	1.62 V	238	48.9	9.5
4	#12830.00	46.2 AV	68.2	-22.0	1.62 V	238	36.7	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.5 PK			2.72 H	307	56.7	44.8
2	*6435.00	90.2 AV			2.72 H	307	45.4	44.8
3	#12870.00	57.8 PK	88.2	-30.4	2.24 H	305	48.4	9.4
4	#12870.00	44.9 AV	68.2	-23.3	2.24 H	305	35.5	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.3 PK			1.06 V	144	55.5	44.8
2	*6435.00	89.0 AV			1.06 V	144	44.2	44.8
3	#12870.00	58.2 PK	88.2	-30.0	1.57 V	256	48.8	9.4
4	#12870.00	45.8 AV	68.2	-22.4	1.57 V	256	36.4	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.1 PK			2.36 H	303	56.2	44.9
2	*6475.00	89.8 AV			2.36 H	303	44.9	44.9
3	#12950.00	57.4 PK	88.2	-30.8	2.27 H	316	48.2	9.2
4	#12950.00	44.6 AV	68.2	-23.6	2.27 H	316	35.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	100.0 PK			1.02 V	147	55.1	44.9
2	*6475.00	88.6 AV			1.02 V	147	43.7	44.9
3	#12950.00	58.4 PK	88.2	-29.8	1.62 V	257	49.2	9.2
4	#12950.00	45.6 AV	68.2	-22.6	1.62 V	257	36.4	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.0 PK			2.26 H	307	58.0	45.0
2	*6515.00	90.5 AV			2.26 H	307	45.5	45.0
3	#13030.00	57.6 PK	88.2	-30.6	2.04 H	149	48.7	8.9
4	#13030.00	44.8 AV	68.2	-23.4	2.04 H	149	35.9	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.6 PK			1.12 V	198	56.6	45.0
2	*6515.00	89.3 AV			1.12 V	198	44.3	45.0
3	#13030.00	56.7 PK	88.2	-31.5	1.58 V	332	47.8	8.9
4	#13030.00	44.0 AV	68.2	-24.2	1.58 V	332	35.1	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.5 PK			2.57 H	295	74.6	44.9
2	*6535.00	108.3 AV			2.57 H	295	63.4	44.9
3	#13070.00	57.5 PK	88.2	-30.7	1.96 H	288	48.5	9.0
4	#13070.00	44.8 AV	68.2	-23.4	1.96 H	288	35.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.0 PK			1.10 V	142	72.1	44.9
2	*6535.00	105.8 AV			1.10 V	142	60.9	44.9
3	#13070.00	57.3 PK	88.2	-30.9	1.74 V	169	48.3	9.0
4	#13070.00	44.6 AV	68.2	-23.6	1.74 V	169	35.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.9 PK			2.57 H	295	74.9	45.0
2	*6695.00	108.8 AV			2.57 H	295	63.8	45.0
3	13390.00	58.0 PK	74.0	-16.0	2.33 H	301	48.4	9.6
4	13390.00	45.4 AV	54.0	-8.6	2.33 H	301	35.8	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.6 PK			1.07 V	142	72.6	45.0
2	*6695.00	106.4 AV			1.07 V	142	61.4	45.0
3	13390.00	58.4 PK	74.0	-15.6	1.62 V	253	48.8	9.6
4	13390.00	45.9 AV	54.0	-8.1	1.62 V	253	36.3	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.2 PK			2.50 H	291	75.9	45.3
2	*6855.00	109.5 AV			2.50 H	291	64.2	45.3
3	#13710.00	57.7 PK	88.2	-30.5	2.31 H	321	48.7	9.0
4	#13710.00	44.9 AV	68.2	-23.3	2.31 H	321	35.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.8 PK			1.11 V	147	73.5	45.3
2	*6855.00	107.1 AV			1.11 V	147	61.8	45.3
3	#13710.00	57.9 PK	88.2	-30.3	1.54 V	252	48.9	9.0
4	#13710.00	45.3 AV	68.2	-22.9	1.54 V	252	36.3	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.8 PK			2.45 H	293	57.4	45.4
2	*6875.00	92.0 AV			2.45 H	293	46.6	45.4
3	#13750.00	57.7 PK	88.2	-30.5	2.36 H	315	48.8	8.9
4	#13750.00	45.0 AV	68.2	-23.2	2.36 H	315	36.1	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.9 PK			1.08 V	141	54.5	45.4
2	*6875.00	89.0 AV			1.08 V	141	43.6	45.4
3	#13750.00	57.2 PK	88.2	-31.0	1.62 V	247	48.3	8.9
4	#13750.00	44.4 AV	68.2	-23.8	1.62 V	247	35.5	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.2 PK			2.47 H	287	57.9	45.3
2	*6995.00	91.6 AV			2.47 H	287	46.3	45.3
3	#13990.00	58.0 PK	88.2	-30.2	2.42 H	306	48.5	9.5
4	#13990.00	45.3 AV	68.2	-22.9	2.42 H	306	35.8	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.4 PK			1.03 V	143	56.1	45.3
2	*6995.00	88.7 AV			1.03 V	143	43.4	45.3
3	#13990.00	57.9 PK	88.2	-30.3	1.53 V	239	48.4	9.5
4	#13990.00	45.2 AV	68.2	-23.0	1.53 V	239	35.7	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.3 PK			2.68 H	292	55.7	45.6
2	*7115.00	90.8 AV			2.68 H	292	45.2	45.6
3	#7125.00	67.6 PK	88.2	-20.6	2.68 H	292	60.1	7.5
4	#7125.00	55.9 AV	68.2	-12.3	2.68 H	292	48.4	7.5
5	#14230.00	57.7 PK	88.2	-30.5	2.36 H	317	48.4	9.3
6	#14230.00	45.0 AV	68.2	-23.2	2.36 H	317	35.7	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.3 PK			1.04 V	149	52.7	45.6
2	*7115.00	87.7 AV			1.04 V	149	42.1	45.6
3	#7125.00	65.8 PK	88.2	-22.4	1.04 V	149	58.3	7.5
4	#7125.00	55.0 AV	68.2	-13.2	1.04 V	149	47.5	7.5
5	#14230.00	58.0 PK	88.2	-30.2	1.72 V	259	48.7	9.3
6	#14230.00	45.6 AV	68.2	-22.6	1.72 V	259	36.3	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

52-tone RU

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.4 PK	88.2	-26.8	2.38 H	228	57.0	4.4
2	#5925.00	46.8 AV	68.2	-21.4	2.38 H	228	42.4	4.4
3	*5955.00	116.1 PK			2.38 H	228	73.9	42.2
4	*5955.00	104.3 AV			2.38 H	228	62.1	42.2
5	11910.00	57.2 PK	74.0	-16.8	2.11 H	108	48.6	8.6
6	11910.00	44.4 AV	54.0	-9.6	2.11 H	108	35.8	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.6 PK	88.2	-3.6	2.14 V	195	80.2	4.4
2	#5925.00	51.5 AV	68.2	-16.7	2.14 V	195	47.1	4.4
3	*5955.00	120.8 PK			2.14 V	195	78.6	42.2
4	*5955.00	108.4 AV			2.14 V	195	66.2	42.2
5	11910.00	56.6 PK	74.0	-17.4	1.55 V	273	48.0	8.6
6	11910.00	43.9 AV	54.0	-10.1	1.55 V	273	35.3	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.8 PK			2.76 H	294	73.6	43.2
2	*6195.00	104.5 AV			2.76 H	294	61.3	43.2
3	12390.00	57.4 PK	74.0	-16.6	2.29 H	305	48.5	8.9
4	12390.00	44.6 AV	54.0	-9.4	2.29 H	305	35.7	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.1 PK			1.07 V	144	76.9	43.2
2	*6195.00	107.8 AV			1.07 V	144	64.6	43.2
3	12390.00	58.0 PK	74.0	-16.0	1.62 V	243	49.1	8.9
4	12390.00	45.5 AV	54.0	-8.5	1.62 V	243	36.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.2 PK			2.59 H	311	72.6	44.6
2	*6415.00	104.8 AV			2.59 H	311	60.2	44.6
3	#12830.00	58.0 PK	88.2	-30.2	2.39 H	324	48.5	9.5
4	#12830.00	45.2 AV	68.2	-23.0	2.39 H	324	35.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.8 PK			1.09 V	143	76.2	44.6
2	*6415.00	108.8 AV			1.09 V	143	64.2	44.6
3	#12830.00	58.6 PK	88.2	-29.6	1.57 V	254	49.1	9.5
4	#12830.00	45.9 AV	68.2	-22.3	1.57 V	254	36.4	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.7 PK			2.72 H	307	56.9	44.8
2	*6435.00	90.5 AV			2.72 H	307	45.7	44.8
3	#12870.00	57.7 PK	88.2	-30.5	2.24 H	305	48.3	9.4
4	#12870.00	45.1 AV	68.2	-23.1	2.24 H	305	35.7	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.6 PK			1.06 V	144	55.8	44.8
2	*6435.00	88.7 AV			1.06 V	144	43.9	44.8
3	#12870.00	57.6 PK	88.2	-30.6	1.57 V	256	48.2	9.4
4	#12870.00	44.9 AV	68.2	-23.3	1.57 V	256	35.5	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.6 PK			2.36 H	303	56.7	44.9
2	*6475.00	90.2 AV			2.36 H	303	45.3	44.9
3	#12950.00	57.7 PK	88.2	-30.5	2.27 H	316	48.5	9.2
4	#12950.00	44.8 AV	68.2	-23.4	2.27 H	316	35.6	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	100.3 PK			1.02 V	147	55.4	44.9
2	*6475.00	89.0 AV			1.02 V	147	44.1	44.9
3	#12950.00	58.0 PK	88.2	-30.2	1.62 V	257	48.8	9.2
4	#12950.00	45.6 AV	68.2	-22.6	1.62 V	257	36.4	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.7 PK			2.26 H	307	57.7	45.0
2	*6515.00	90.2 AV			2.26 H	307	45.2	45.0
3	#13030.00	57.3 PK	88.2	-30.9	2.04 H	149	48.4	8.9
4	#13030.00	44.6 AV	68.2	-23.6	2.04 H	149	35.7	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.1 PK			1.12 V	198	56.1	45.0
2	*6515.00	88.8 AV			1.12 V	198	43.8	45.0
3	#13030.00	56.5 PK	88.2	-31.7	1.58 V	332	47.6	8.9
4	#13030.00	43.8 AV	68.2	-24.4	1.58 V	332	34.9	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.8 PK			2.57 H	295	74.9	44.9
2	*6535.00	108.6 AV			2.57 H	295	63.7	44.9
3	#13070.00	57.1 PK	88.2	-31.1	1.96 H	288	48.1	9.0
4	#13070.00	44.3 AV	68.2	-23.9	1.96 H	288	35.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.2 PK			1.10 V	142	72.3	44.9
2	*6535.00	106.2 AV			1.10 V	142	61.3	44.9
3	#13070.00	57.5 PK	88.2	-30.7	1.74 V	169	48.5	9.0
4	#13070.00	44.8 AV	68.2	-23.4	1.74 V	169	35.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.1 PK			2.54 H	292	76.1	45.0
2	*6695.00	109.8 AV			2.54 H	292	64.8	45.0
3	13390.00	57.9 PK	74.0	-16.1	2.24 H	314	48.3	9.6
4	13390.00	45.3 AV	54.0	-8.7	2.24 H	314	35.7	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.9 PK			1.08 V	147	73.9	45.0
2	*6695.00	107.5 AV			1.08 V	147	62.5	45.0
3	13390.00	58.3 PK	74.0	-15.7	1.59 V	251	48.7	9.6
4	13390.00	45.9 AV	54.0	-8.1	1.59 V	251	36.3	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.9 PK			2.50 H	291	76.6	45.3
2	*6855.00	110.2 AV			2.50 H	291	64.9	45.3
3	#13710.00	57.5 PK	88.2	-30.7	2.31 H	321	48.5	9.0
4	#13710.00	44.7 AV	68.2	-23.5	2.31 H	321	35.7	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.4 PK			1.11 V	0	74.1	45.3
2	*6855.00	108.0 AV			1.11 V	0	62.7	45.3
3	#13710.00	57.9 PK	88.2	-30.3	1.54 V	252	48.9	9.0
4	#13710.00	45.2 AV	68.2	-23.0	1.54 V	252	36.2	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.5 PK			2.45 H	293	57.1	45.4
2	*6875.00	91.7 AV			2.45 H	293	46.3	45.4
3	#13750.00	57.4 PK	88.2	-30.8	2.36 H	315	48.5	8.9
4	#13750.00	44.5 AV	68.2	-23.7	2.36 H	315	35.6	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.5 PK			1.08 V	141	54.1	45.4
2	*6875.00	88.6 AV			1.08 V	141	43.2	45.4
3	#13750.00	57.7 PK	88.2	-30.5	1.62 V	247	48.8	8.9
4	#13750.00	45.2 AV	68.2	-23.0	1.62 V	247	36.3	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.5 PK			2.47 H	287	58.2	45.3
2	*6995.00	91.9 AV			2.47 H	287	46.6	45.3
3	#13990.00	57.7 PK	88.2	-30.5	2.42 H	306	48.2	9.5
4	#13990.00	44.9 AV	68.2	-23.3	2.42 H	306	35.4	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.7 PK			1.03 V	143	56.4	45.3
2	*6995.00	88.9 AV			1.03 V	143	43.6	45.3
3	#13990.00	57.9 PK	88.2	-30.3	1.53 V	239	48.4	9.5
4	#13990.00	45.1 AV	68.2	-23.1	1.53 V	239	35.6	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.6 PK			2.53 H	294	58.0	45.6
2	*7115.00	90.4 AV			2.53 H	294	44.8	45.6
3	#7125.00	66.3 PK	88.2	-21.9	2.53 H	294	58.8	7.5
4	#7125.00	57.4 AV	68.2	-10.8	2.53 H	294	49.9	7.5
5	#14230.00	57.7 PK	88.2	-30.5	2.31 H	308	48.4	9.3
6	#14230.00	44.9 AV	68.2	-23.3	2.31 H	308	35.6	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.5 PK			1.16 V	107	53.9	45.6
2	*7115.00	86.2 AV			1.16 V	107	40.6	45.6
3	#7125.00	62.7 PK	88.2	-25.5	1.16 V	107	55.2	7.5
4	#7125.00	54.1 AV	68.2	-14.1	1.16 V	107	46.6	7.5
5	#14230.00	57.4 PK	88.2	-30.8	1.72 V	253	48.1	9.3
6	#14230.00	44.8 AV	68.2	-23.4	1.72 V	253	35.5	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

106-tone RU

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.6 PK	88.2	-15.6	2.89 H	293	68.2	4.4
2	#5925.00	50.3 AV	68.2	-17.9	2.89 H	293	45.9	4.4
3	*5955.00	115.6 PK			2.89 H	293	73.4	42.2
4	*5955.00	104.3 AV			2.89 H	293	62.1	42.2
5	11910.00	57.3 PK	74.0	-16.7	2.37 H	312	48.7	8.6
6	11910.00	44.8 AV	54.0	-9.2	2.37 H	312	36.2	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.7 PK	88.2	-12.5	1.05 V	140	71.3	4.4
2	#5925.00	58.7 AV	68.2	-9.5	1.05 V	140	54.3	4.4
3	*5955.00	120.0 PK			1.05 V	140	77.8	42.2
4	*5955.00	108.6 AV			1.05 V	140	66.4	42.2
5	11910.00	57.9 PK	74.0	-16.1	1.51 V	253	49.3	8.6
6	11910.00	45.4 AV	54.0	-8.6	1.51 V	253	36.8	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.6 PK			2.76 H	294	73.4	43.2
2	*6195.00	104.3 AV			2.76 H	294	61.1	43.2
3	12390.00	57.1 PK	74.0	-16.9	2.29 H	305	48.2	8.9
4	12390.00	44.3 AV	54.0	-9.7	2.29 H	305	35.4	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.0 PK			1.07 V	144	76.8	43.2
2	*6195.00	107.6 AV			1.07 V	144	64.4	43.2
3	12390.00	57.7 PK	74.0	-16.3	1.62 V	243	48.8	8.9
4	12390.00	45.1 AV	54.0	-8.9	1.62 V	243	36.2	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.5 PK			2.59 H	311	72.9	44.6
2	*6415.00	105.2 AV			2.59 H	311	60.6	44.6
3	#12830.00	57.9 PK	88.2	-30.3	2.39 H	324	48.4	9.5
4	#12830.00	45.2 AV	68.2	-23.0	2.39 H	324	35.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.5 PK			1.09 V	143	75.9	44.6
2	*6415.00	108.4 AV			1.09 V	143	63.8	44.6
3	#12830.00	58.3 PK	88.2	-29.9	1.57 V	254	48.8	9.5
4	#12830.00	46.1 AV	68.2	-22.1	1.57 V	254	36.6	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.3 PK			2.72 H	307	56.5	44.8
2	*6435.00	90.0 AV			2.72 H	307	45.2	44.8
3	#12870.00	58.2 PK	88.2	-30.0	2.24 H	305	48.8	9.4
4	#12870.00	45.4 AV	68.2	-22.8	2.24 H	305	36.0	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.9 PK			1.06 V	144	55.1	44.8
2	*6435.00	88.7 AV			1.06 V	144	43.9	44.8
3	#12870.00	57.9 PK	88.2	-30.3	1.57 V	256	48.5	9.4
4	#12870.00	45.1 AV	68.2	-23.1	1.57 V	256	35.7	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.5 PK			2.32 H	307	57.6	44.9
2	*6475.00	90.1 AV			2.32 H	307	45.2	44.9
3	#12950.00	57.6 PK	88.2	-30.6	4.00 H	320	48.4	9.2
4	#12950.00	44.7 AV	68.2	-23.5	4.00 H	320	35.5	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.1 PK			1.06 V	145	56.2	44.9
2	*6475.00	88.8 AV			1.06 V	145	43.9	44.9
3	#12950.00	57.9 PK	88.2	-30.3	1.53 V	238	48.7	9.2
4	#12950.00	45.3 AV	68.2	-22.9	1.53 V	238	36.1	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.5 PK			2.26 H	307	58.5	45.0
2	*6515.00	90.9 AV			2.26 H	307	45.9	45.0
3	#13030.00	58.1 PK	88.2	-30.1	2.04 H	149	49.2	8.9
4	#13030.00	45.4 AV	68.2	-22.8	2.04 H	149	36.5	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.1 PK			1.12 V	198	57.1	45.0
2	*6515.00	89.7 AV			1.12 V	198	44.7	45.0
3	#13030.00	57.2 PK	88.2	-31.0	1.58 V	332	48.3	8.9
4	#13030.00	44.6 AV	68.2	-23.6	1.58 V	332	35.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.1 PK			2.57 H	295	75.2	44.9
2	*6535.00	108.9 AV			2.57 H	295	64.0	44.9
3	#13070.00	57.7 PK	88.2	-30.5	1.96 H	288	48.7	9.0
4	#13070.00	45.1 AV	68.2	-23.1	1.96 H	288	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.6 PK			1.10 V	142	72.7	44.9
2	*6535.00	106.6 AV			1.10 V	142	61.7	44.9
3	#13070.00	58.0 PK	88.2	-30.2	1.74 V	169	49.0	9.0
4	#13070.00	45.2 AV	68.2	-23.0	1.74 V	169	36.2	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.8 PK			2.55 H	306	76.8	45.0
2	*6695.00	109.6 AV			2.55 H	306	64.6	45.0
3	13390.00	57.9 PK	74.0	-16.1	2.36 H	315	48.3	9.6
4	13390.00	45.2 AV	54.0	-8.8	2.36 H	315	35.6	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.6 PK			1.04 V	145	74.6	45.0
2	*6695.00	107.3 AV			1.04 V	145	62.3	45.0
3	13390.00	58.2 PK	74.0	-15.8	1.67 V	254	48.6	9.6
4	13390.00	45.8 AV	54.0	-8.2	1.67 V	254	36.2	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.4 PK			2.50 H	291	76.1	45.3
2	*6855.00	109.8 AV			2.50 H	291	64.5	45.3
3	#13710.00	57.4 PK	88.2	-30.8	2.31 H	321	48.4	9.0
4	#13710.00	44.7 AV	68.2	-23.5	2.31 H	321	35.7	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.1 PK			1.11 V	147	73.8	45.3
2	*6855.00	107.5 AV			1.11 V	147	62.2	45.3
3	#13710.00	57.5 PK	88.2	-30.7	1.54 V	252	48.5	9.0
4	#13710.00	45.1 AV	68.2	-23.1	1.54 V	252	36.1	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	103.0 PK			2.45 H	293	57.6	45.4
2	*6875.00	92.3 AV			2.45 H	293	46.9	45.4
3	#13750.00	57.0 PK	88.2	-31.2	2.36 H	315	48.1	8.9
4	#13750.00	44.2 AV	68.2	-24.0	2.36 H	315	35.3	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.2 PK			1.08 V	141	54.8	45.4
2	*6875.00	89.3 AV			1.08 V	141	43.9	45.4
3	#13750.00	57.3 PK	88.2	-30.9	1.62 V	247	48.4	8.9
4	#13750.00	44.6 AV	68.2	-23.6	1.62 V	247	35.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.9 PK			2.47 H	287	57.6	45.3
2	*6995.00	91.3 AV			2.47 H	287	46.0	45.3
3	#13990.00	57.8 PK	88.2	-30.4	2.42 H	306	48.3	9.5
4	#13990.00	45.1 AV	68.2	-23.1	2.42 H	306	35.6	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.1 PK			1.03 V	143	54.8	45.3
2	*6995.00	88.4 AV			1.03 V	143	43.1	45.3
3	#13990.00	58.1 PK	88.2	-30.1	1.53 V	239	48.6	9.5
4	#13990.00	45.7 AV	68.2	-22.5	1.53 V	239	36.2	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.3 PK			2.53 H	294	57.7	45.6
2	*7115.00	90.6 AV			2.53 H	294	45.0	45.6
3	#7125.00	66.9 PK	88.2	-21.3	2.53 H	294	59.4	7.5
4	#7125.00	57.2 AV	68.2	-11.0	2.53 H	294	49.7	7.5
5	#14230.00	58.0 PK	88.2	-30.2	2.31 H	307	48.7	9.3
6	#14230.00	45.2 AV	68.2	-23.0	2.31 H	307	35.9	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.7 PK			1.16 V	107	53.1	45.6
2	*7115.00	86.5 AV			1.16 V	107	40.9	45.6
3	#7125.00	63.4 PK	88.2	-24.8	1.16 V	107	55.9	7.5
4	#7125.00	54.4 AV	68.2	-13.8	1.16 V	107	46.9	7.5
5	#14230.00	57.3 PK	88.2	-30.9	1.72 V	264	48.0	9.3
6	#14230.00	44.6 AV	68.2	-23.6	1.72 V	264	35.3	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Mode B

under control of low power indoor AP


1TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 1

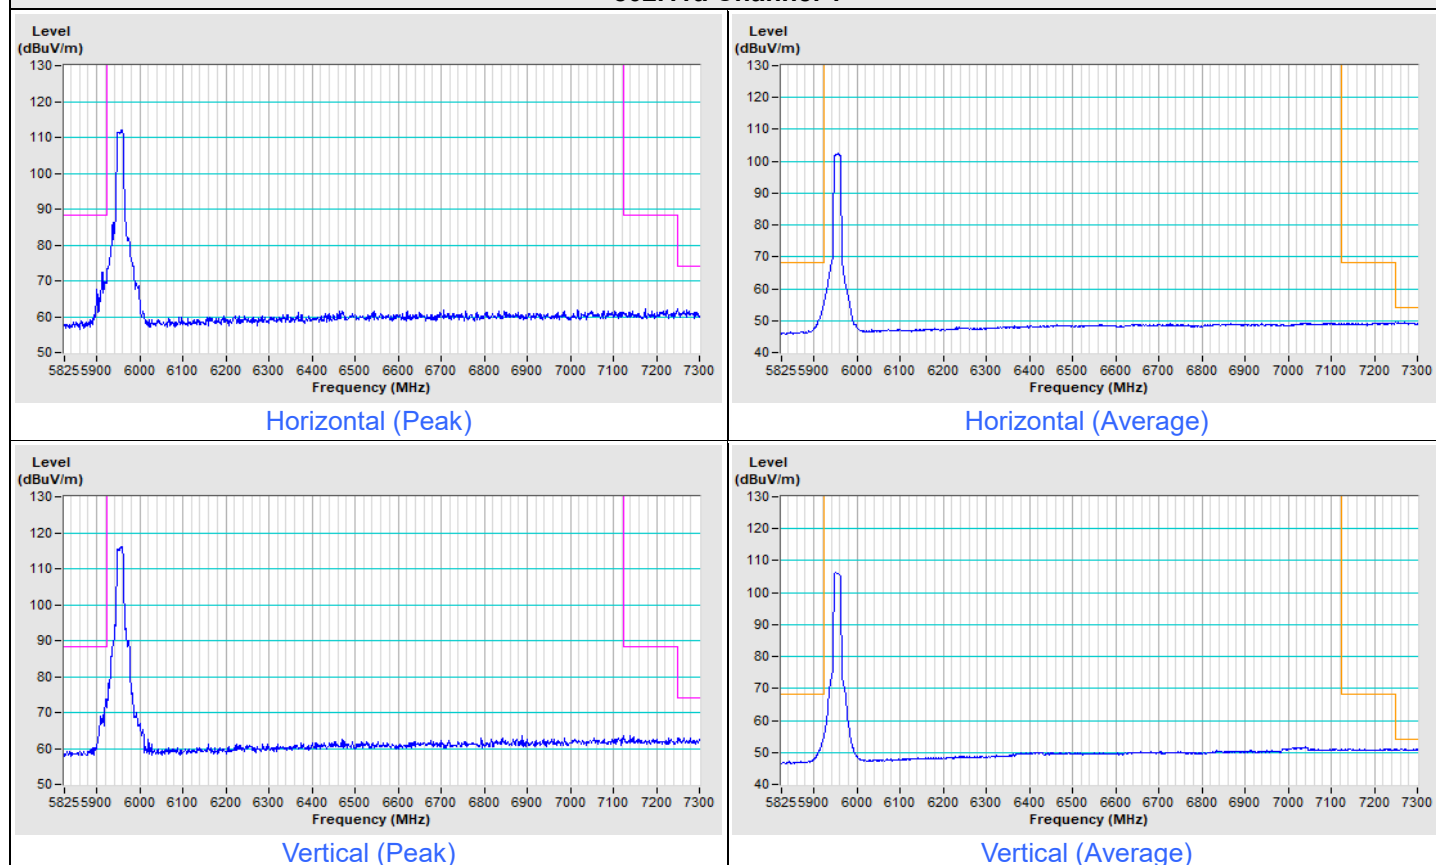


802.11a Channel 233

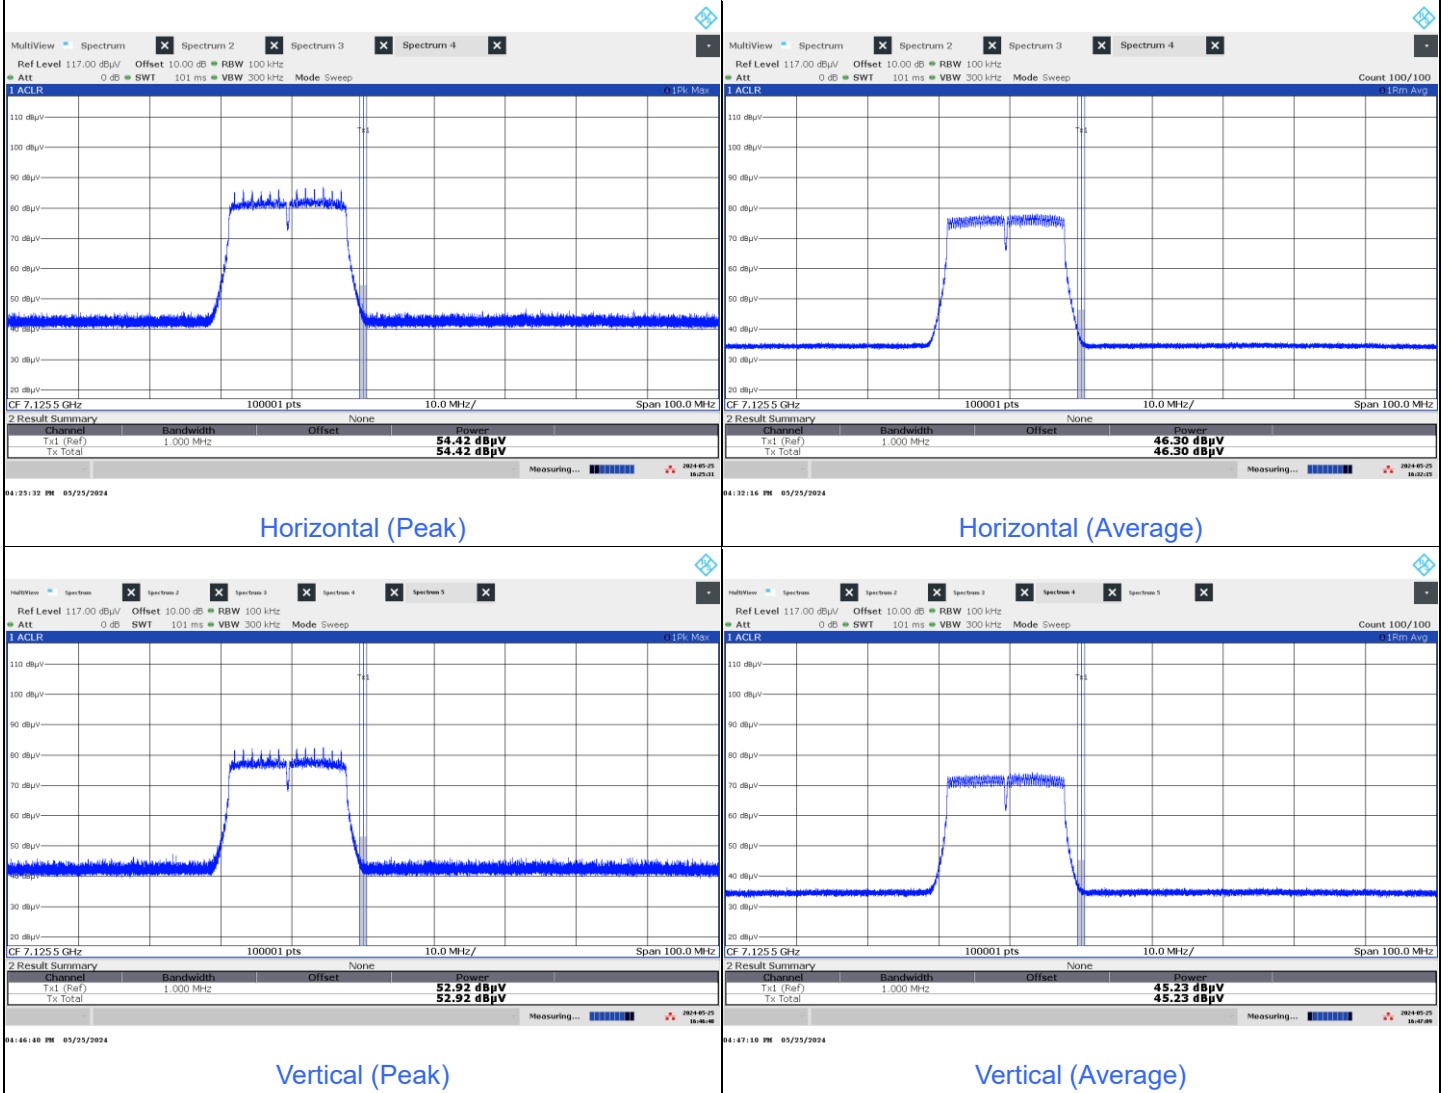


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--





802.11be (EHT20) Channel 1

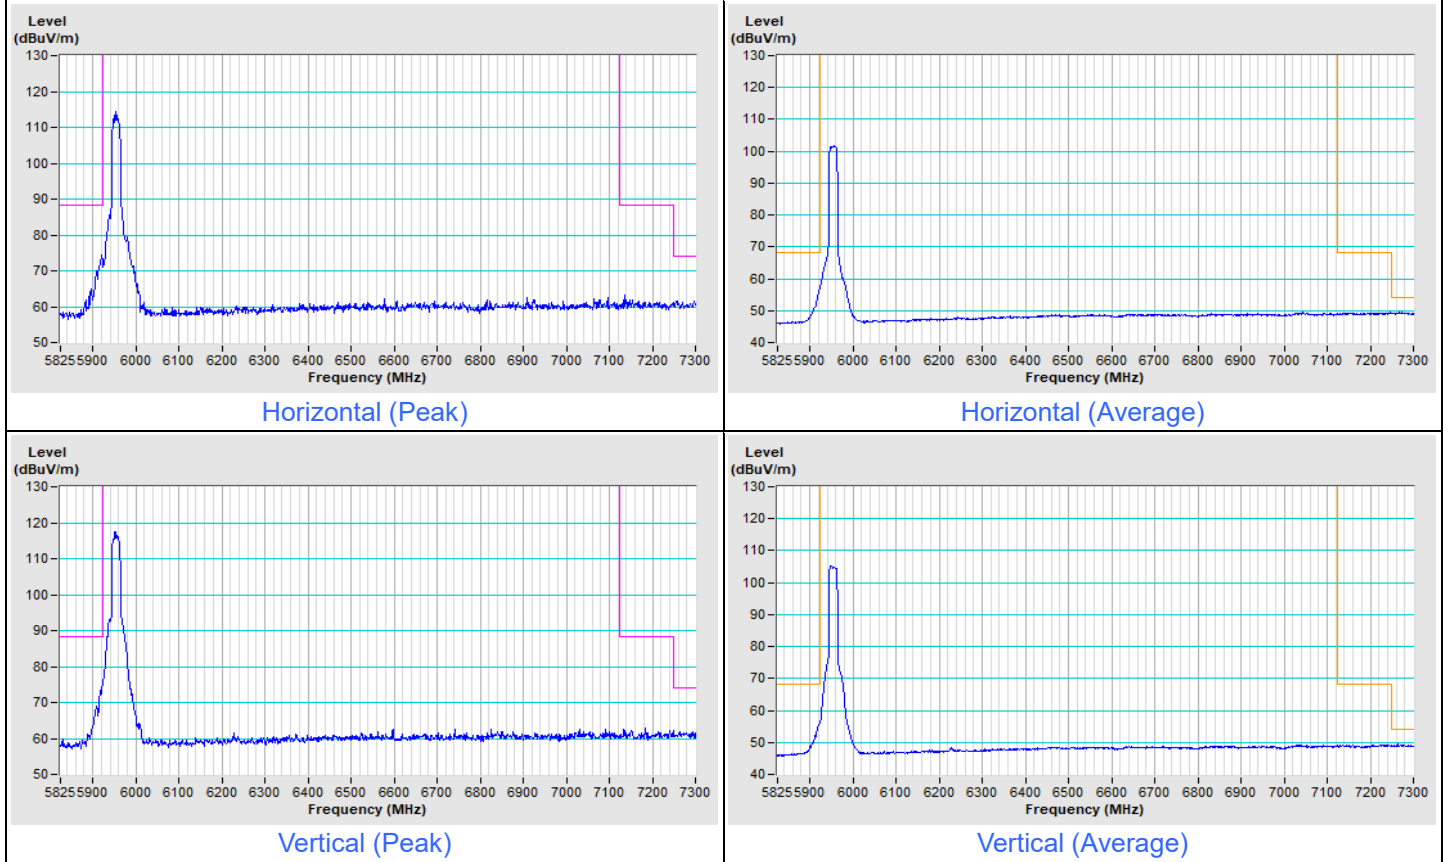

802.11be (EHT20) Channel 233

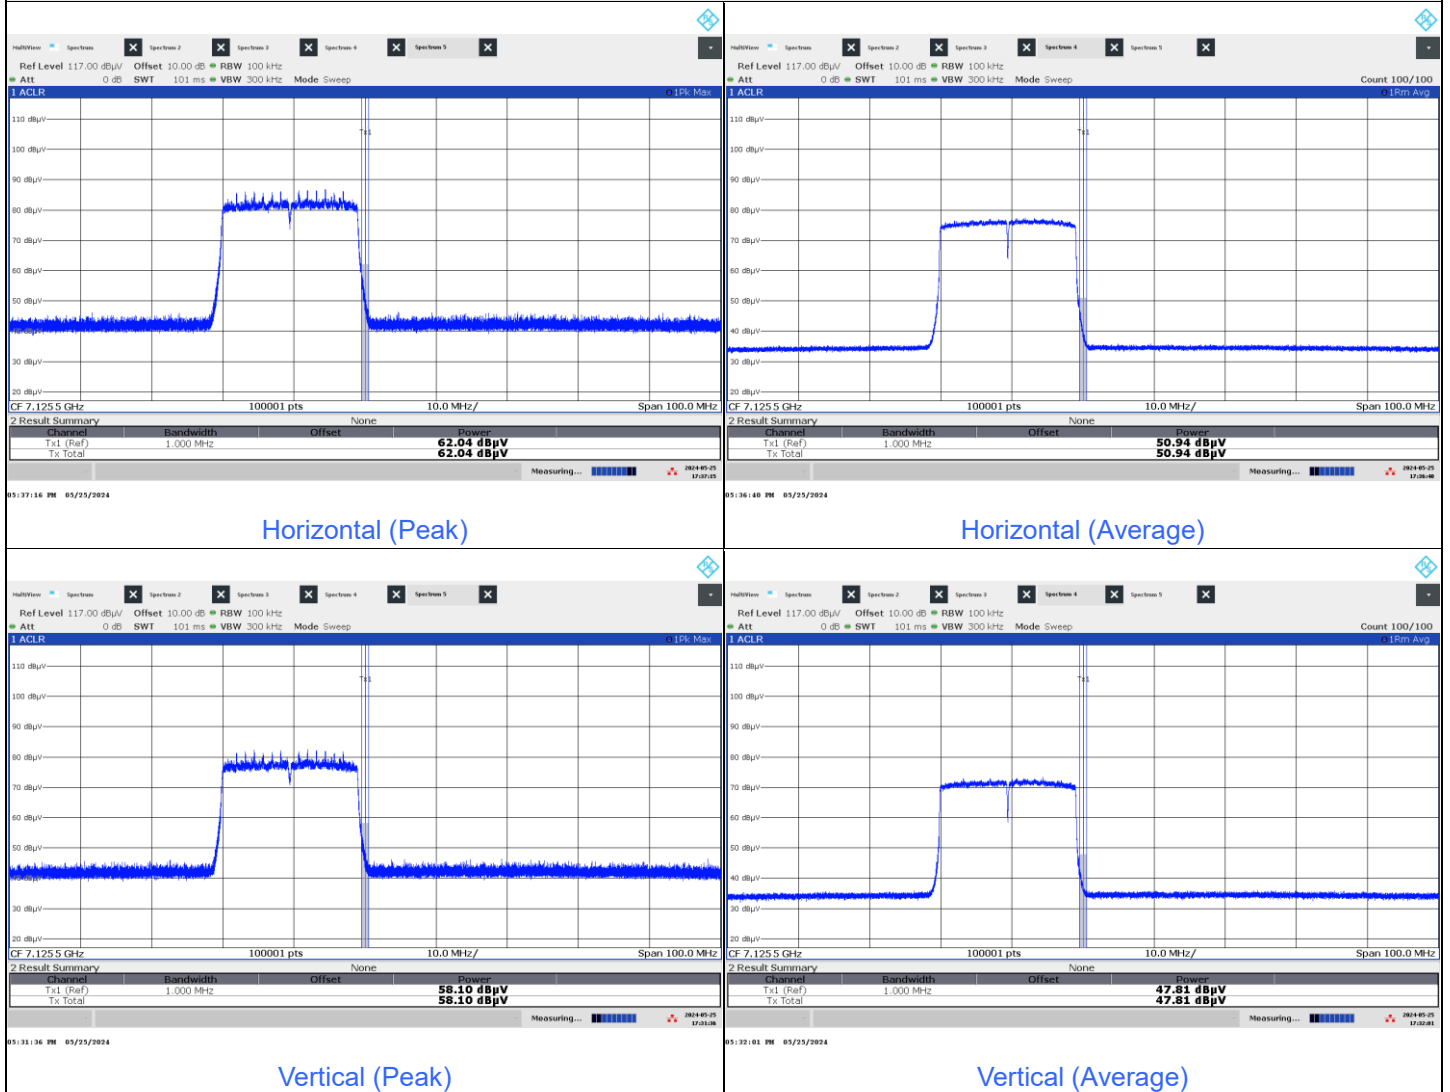


802.11be (EHT40) Channel 3

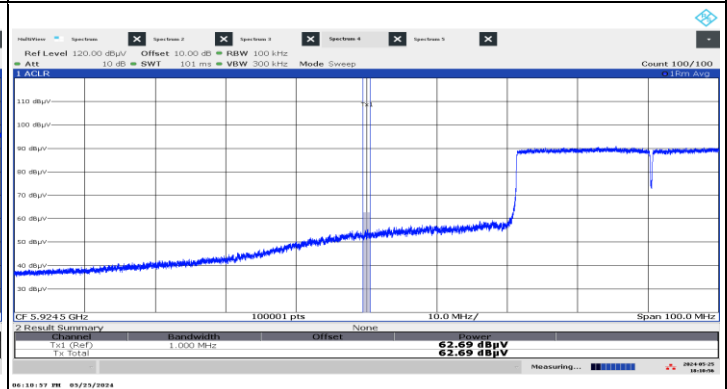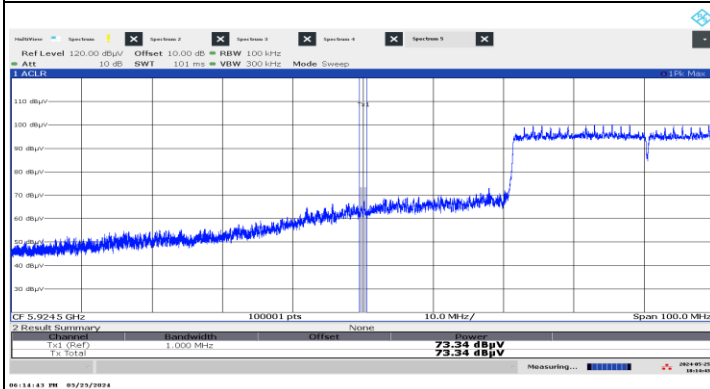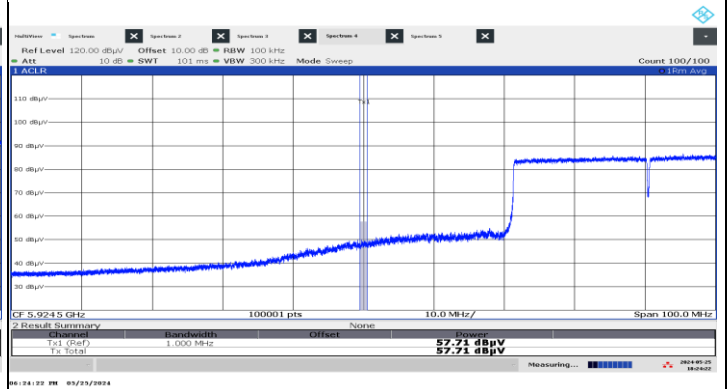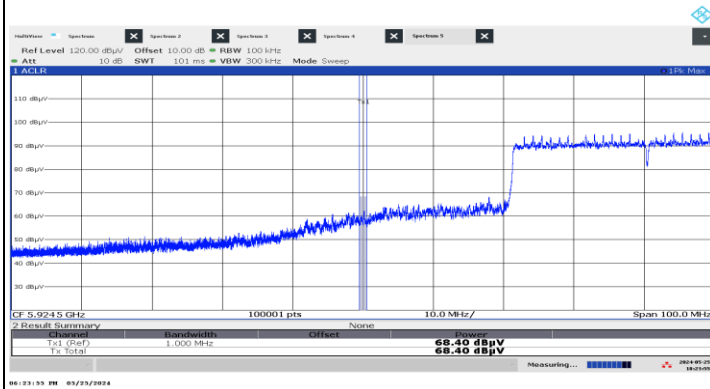


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 227

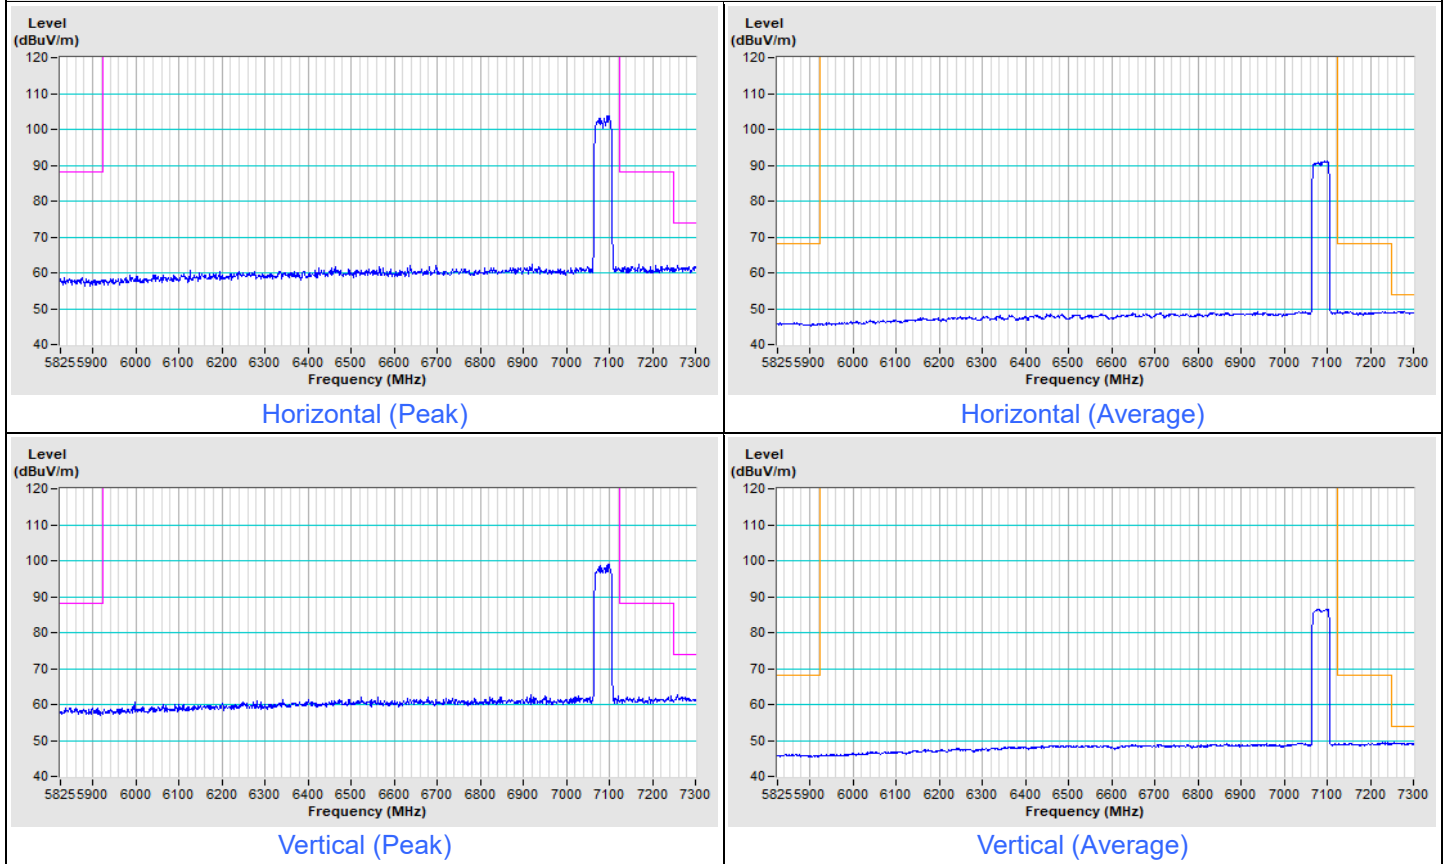


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

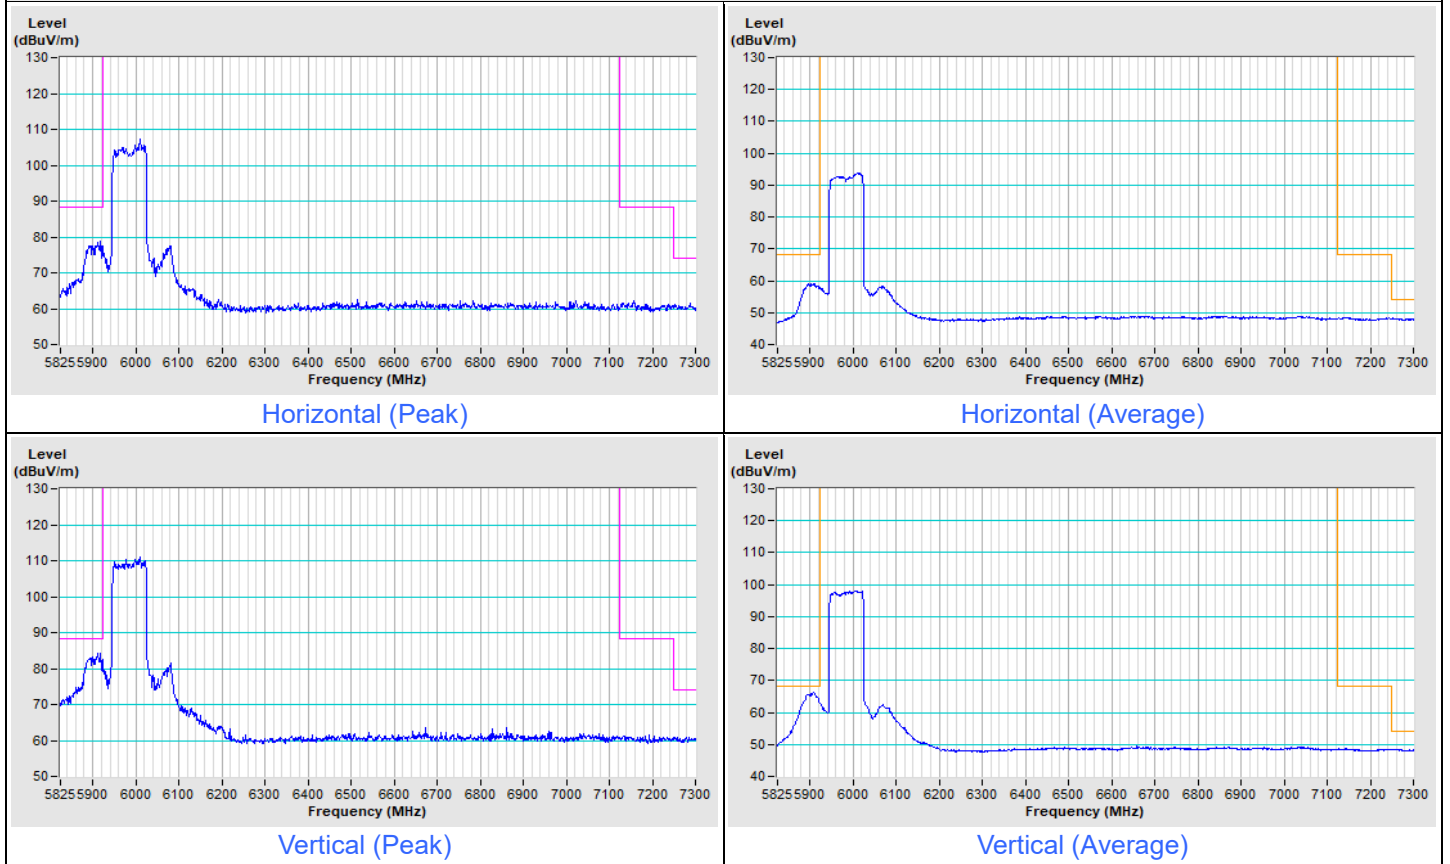


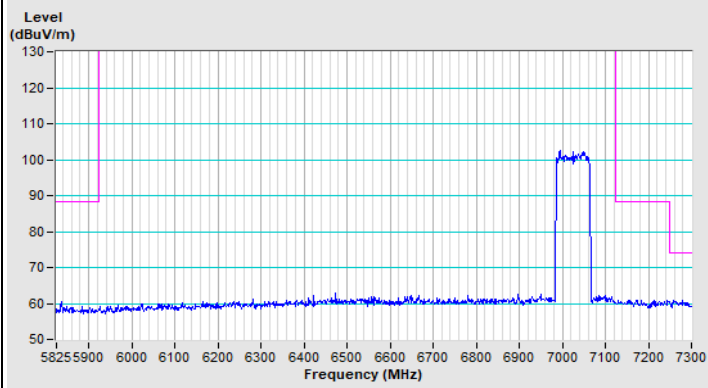802.11be (EHT80) Channel 215


Horizontal (Peak)

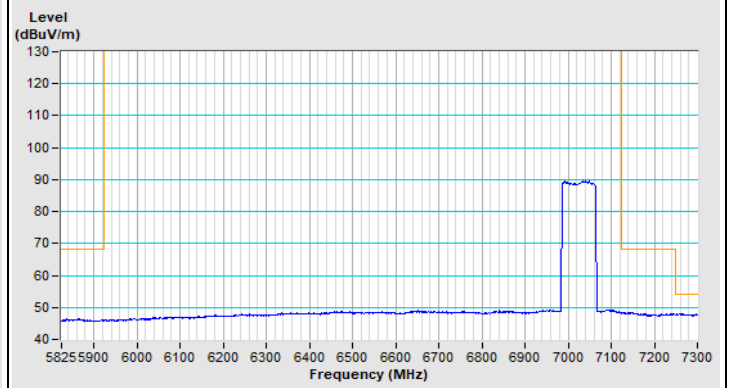

Horizontal (Average)

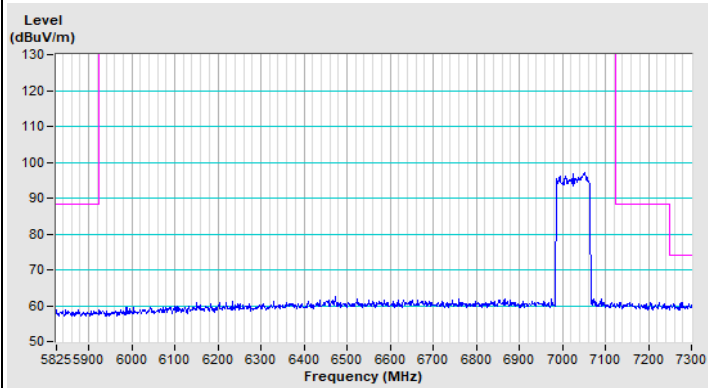


Vertical (Peak)

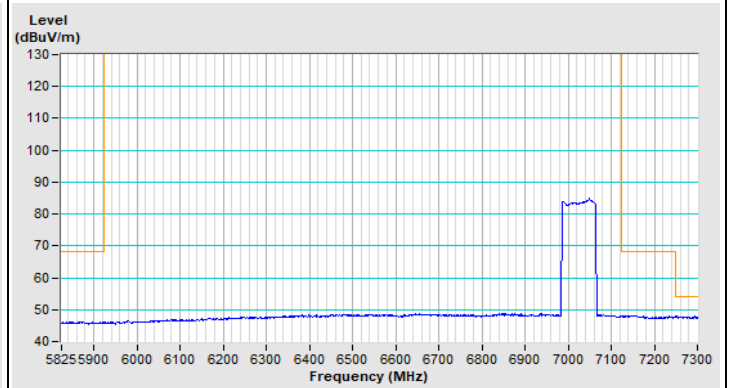


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

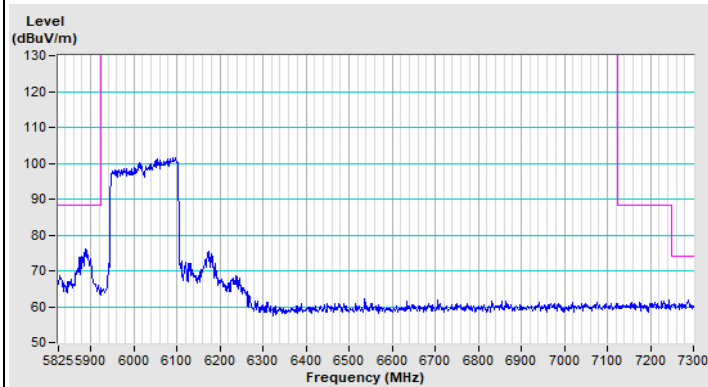


Horizontal (Peak)

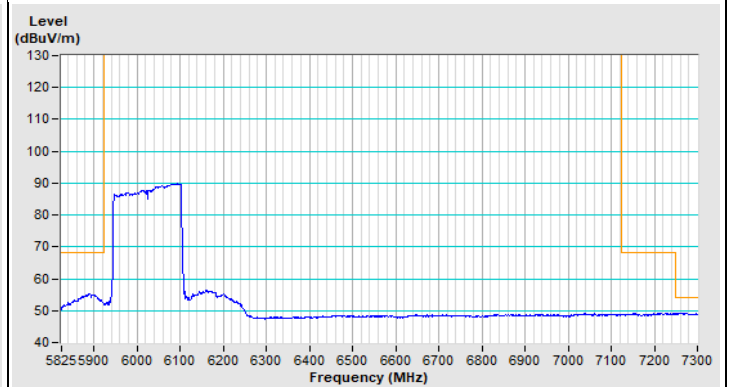

Horizontal (Average)

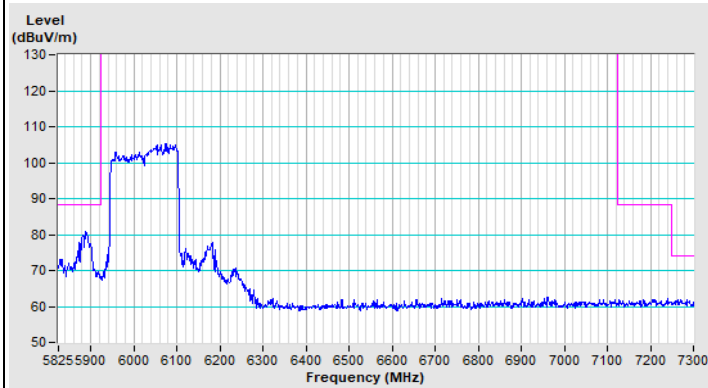


Vertical (Peak)

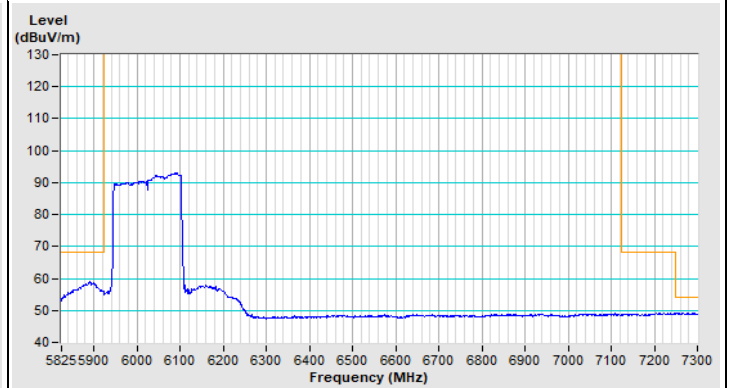


Vertical (Average)


802.11be (EHT160) Channel 207

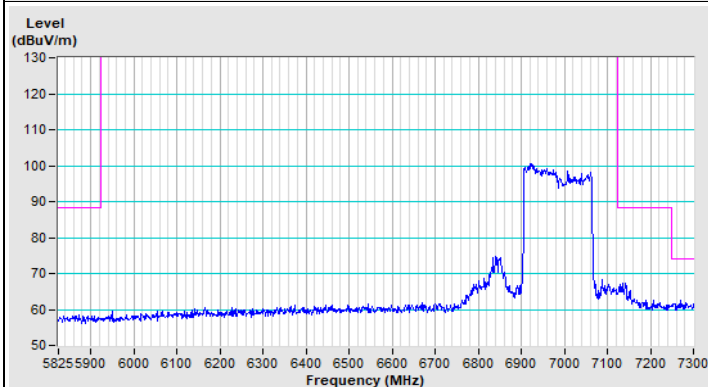


Horizontal (Peak)

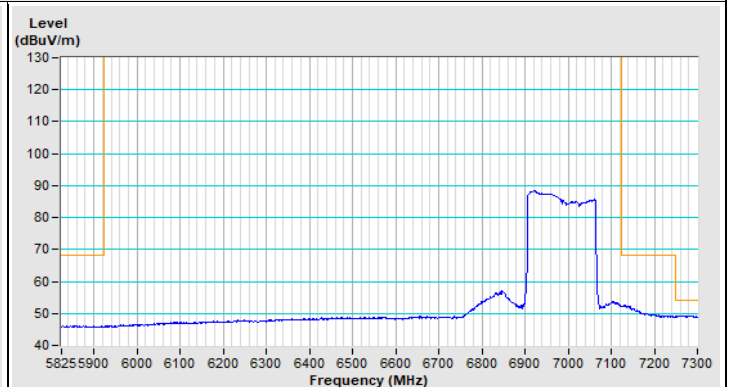

Horizontal (Average)

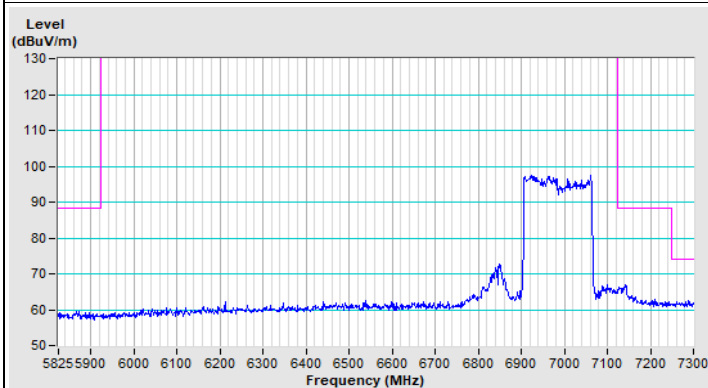

Vertical (Peak)

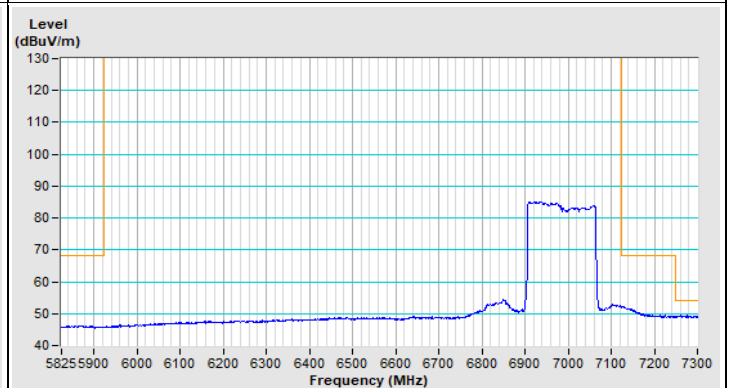


Vertical (Average)

Plot of Band Edge


Partial RU_1TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

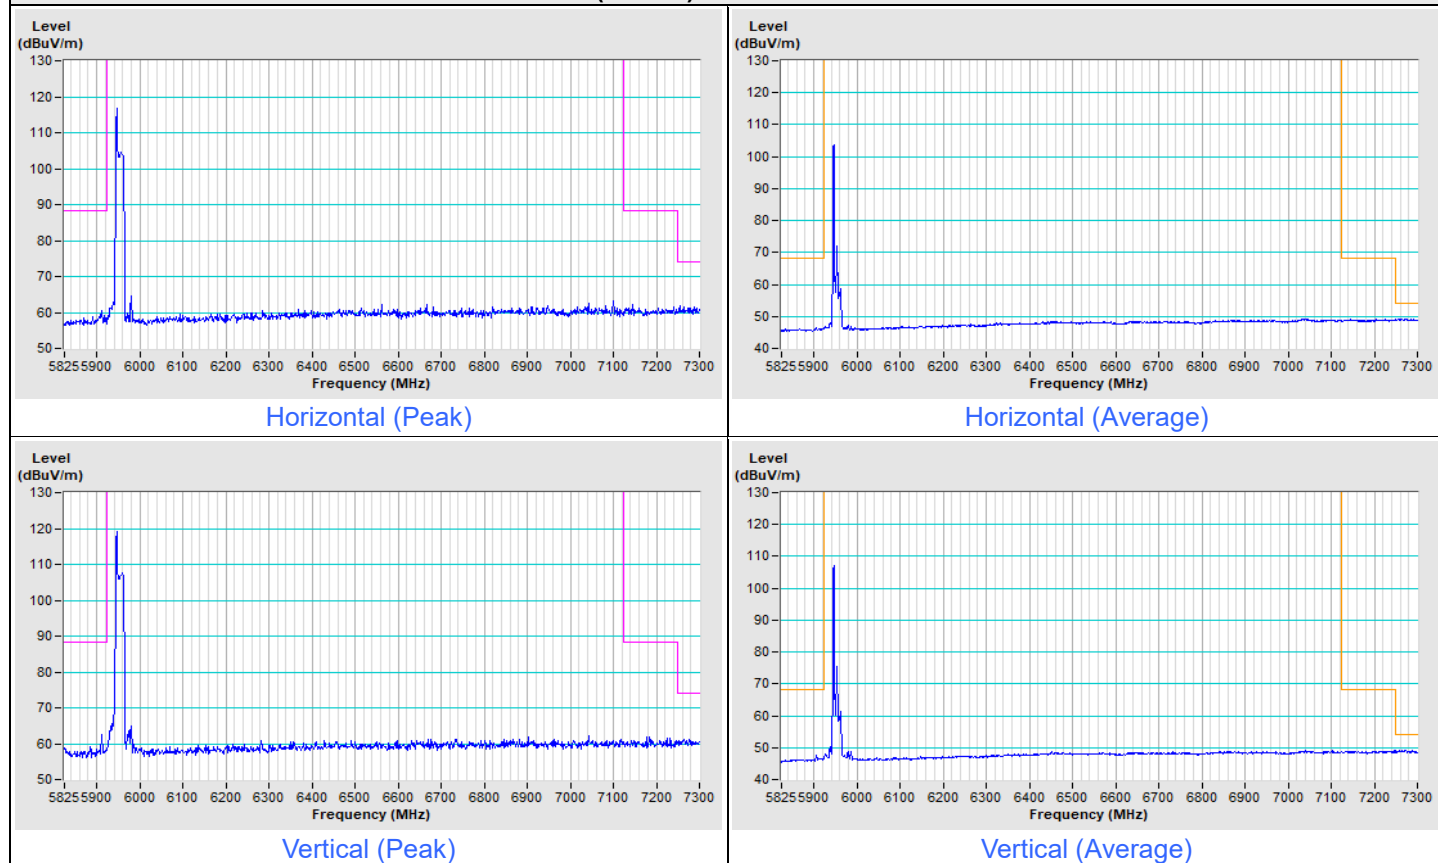


802.11be (EHT20) 26-tone Channel 233

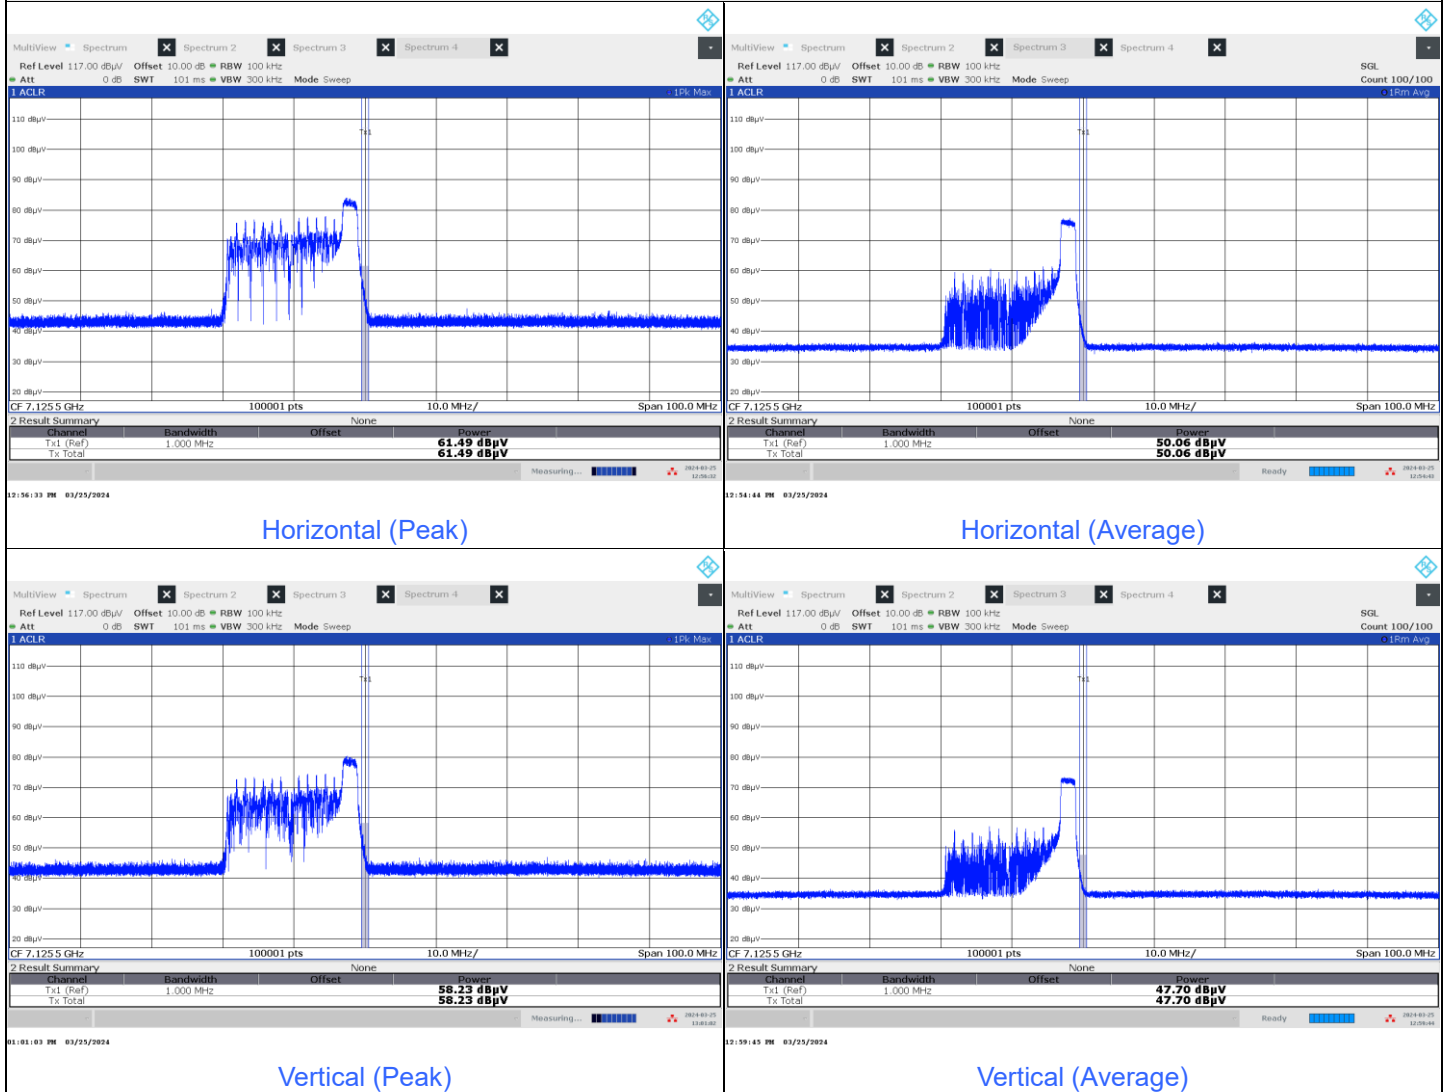


802.11be (EHT20) 52-tone RU Channel 1

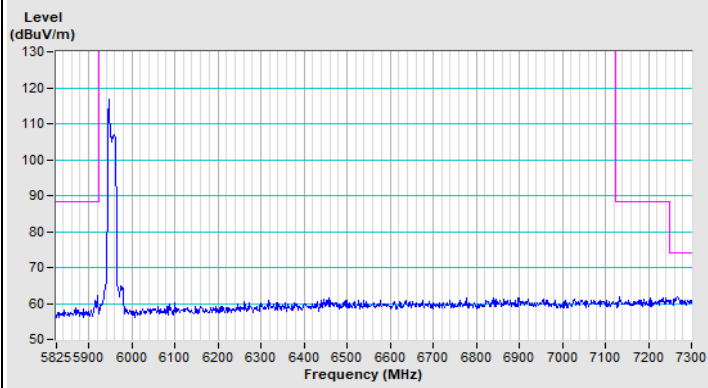


Horizontal (Peak)

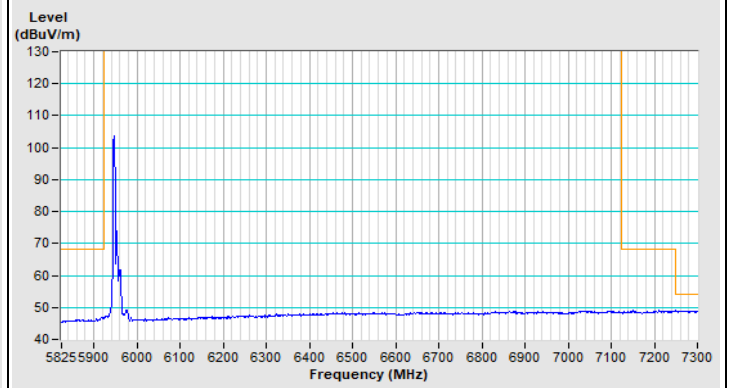

Horizontal (Average)

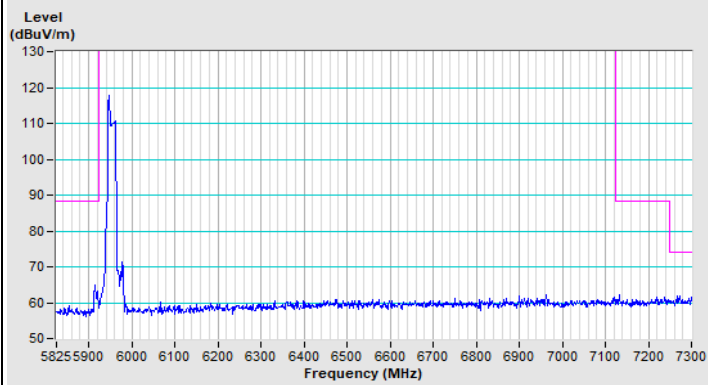


Vertical (Peak)

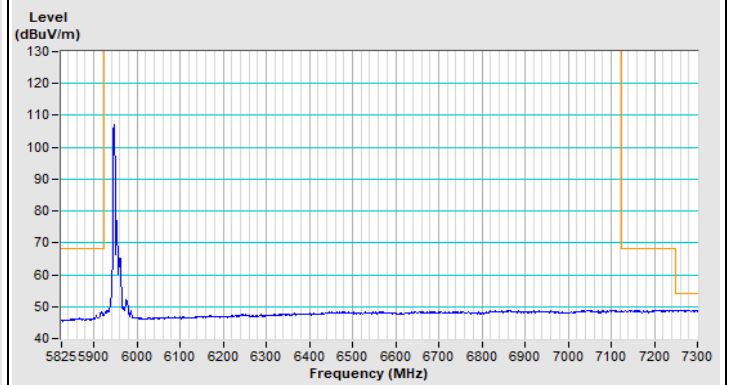

Vertical (Average)




802.11be (EHT20) 52-tone Channel 233

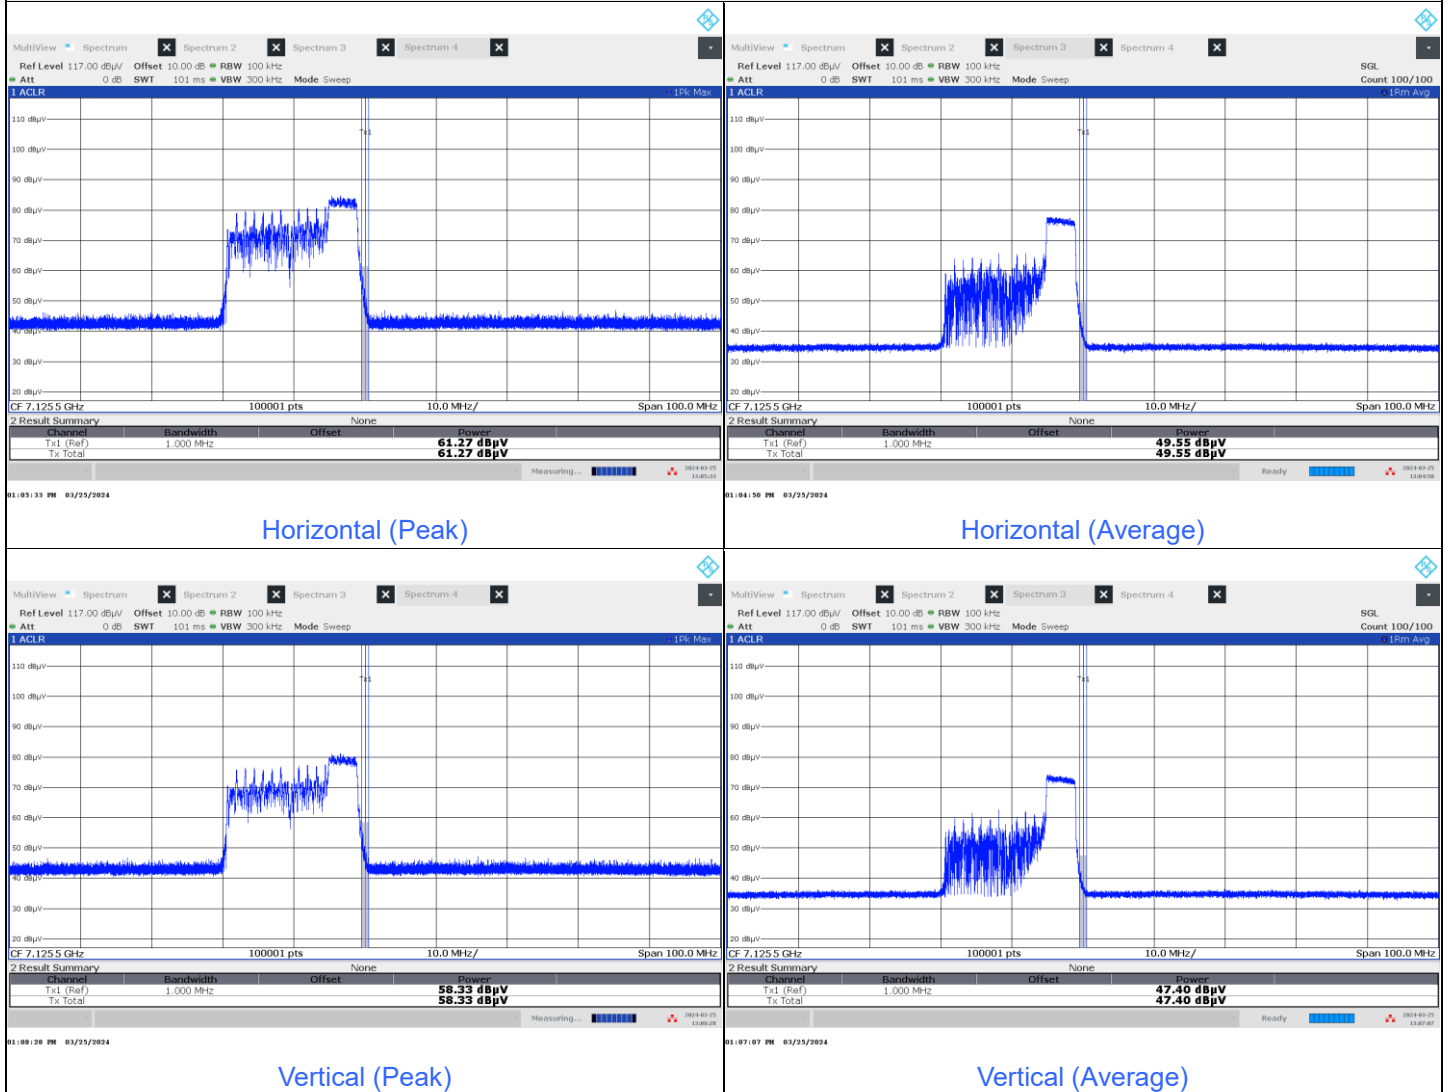


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

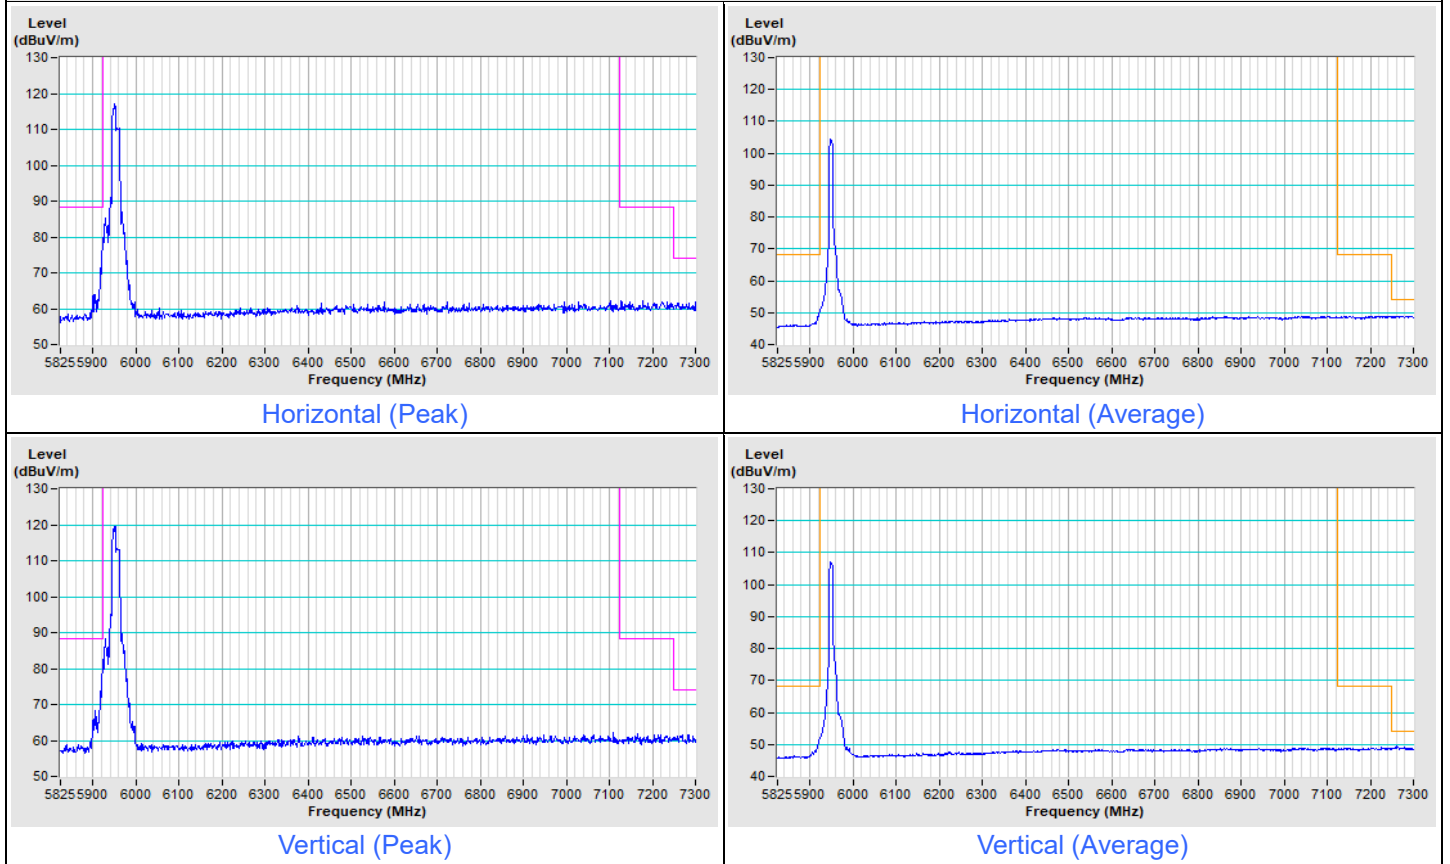


802.11be (EHT20) 106-tone Channel 233

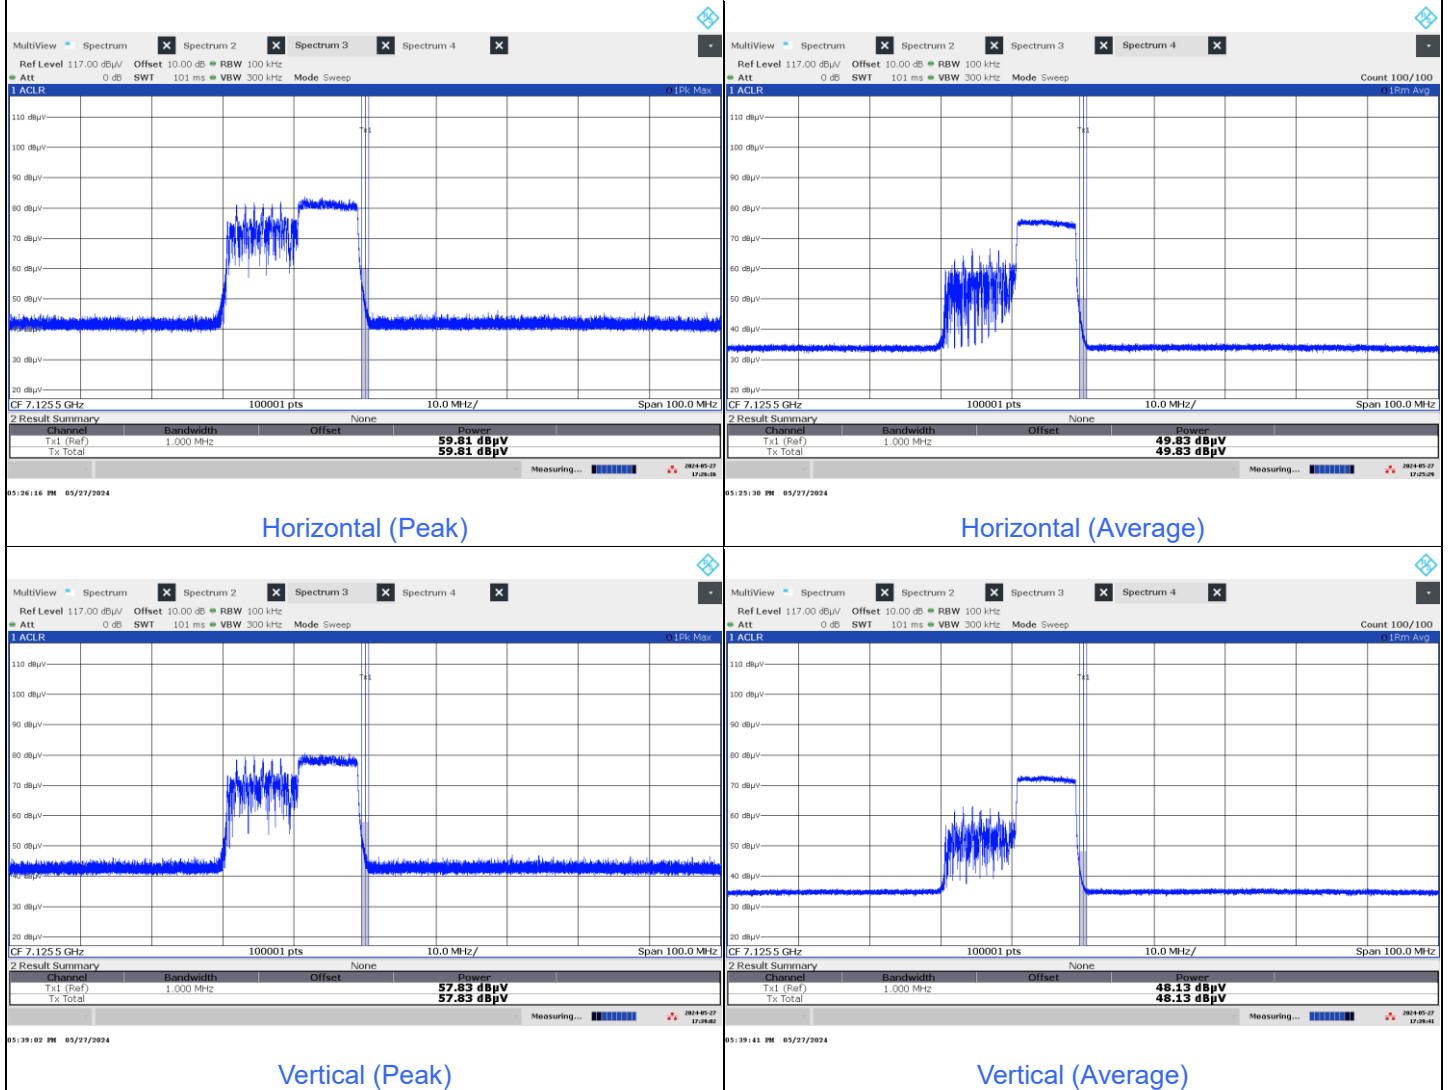


2TX


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 1

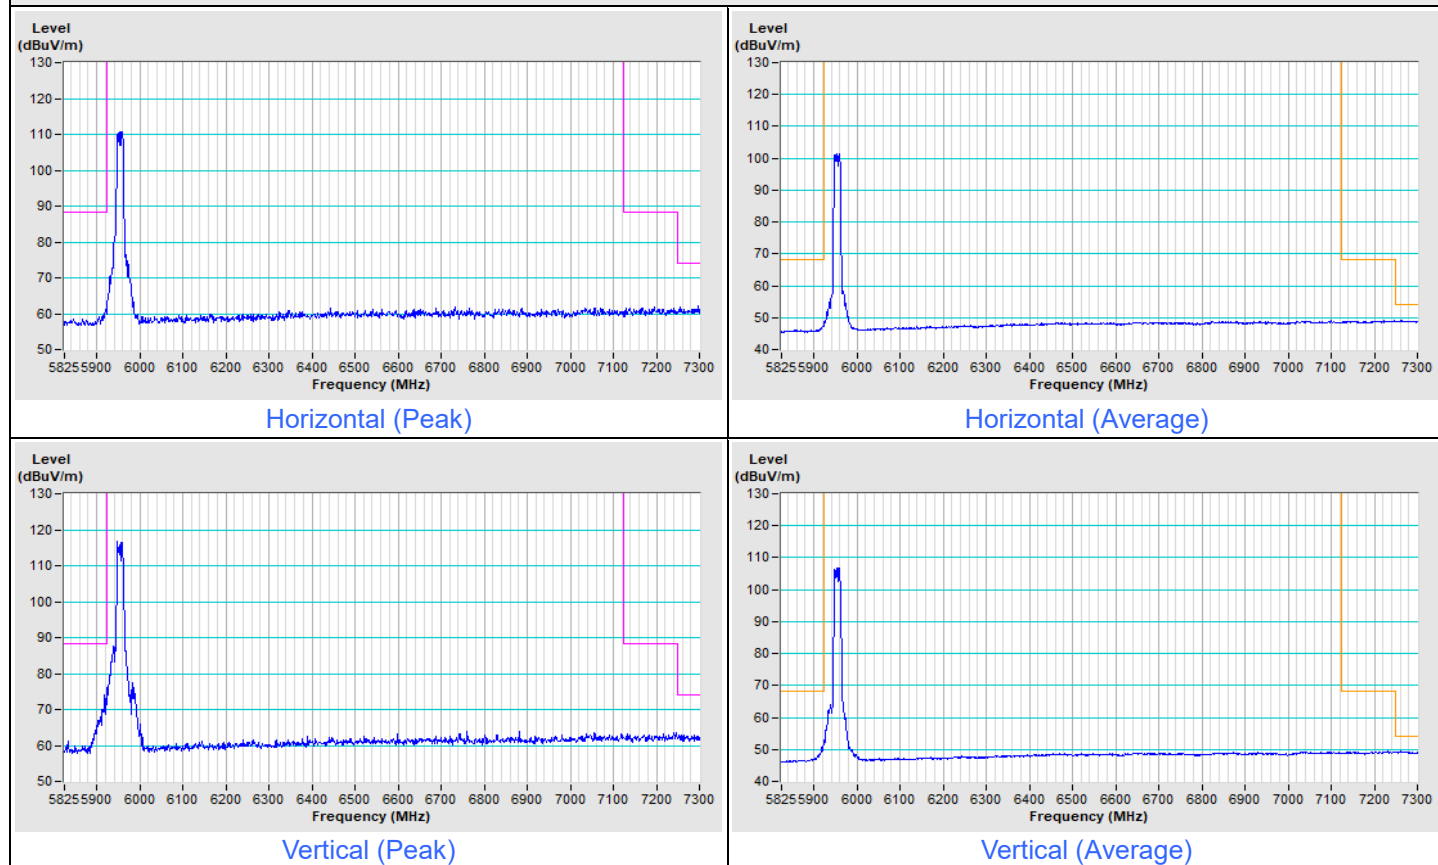


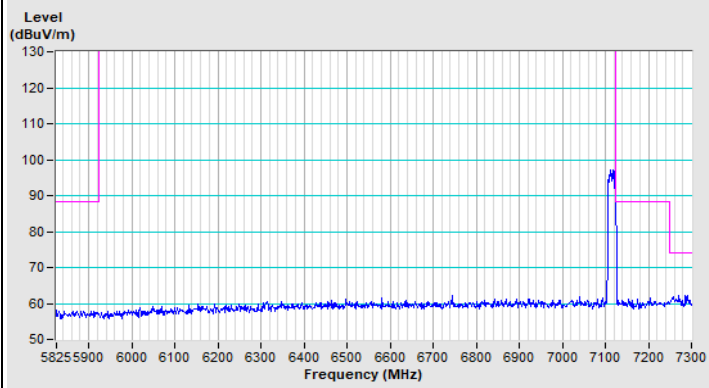802.11a Channel 233


Horizontal (Peak)

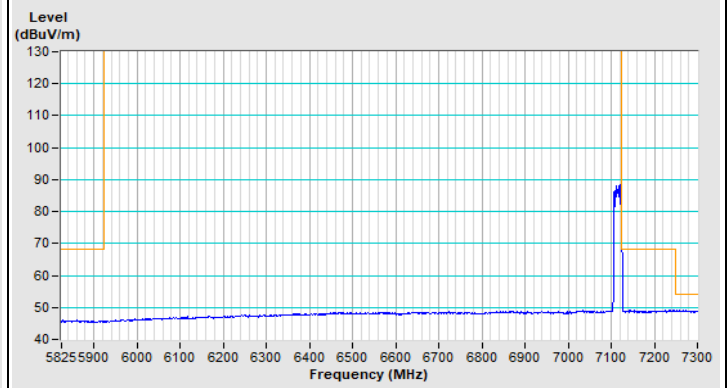

Horizontal (Average)

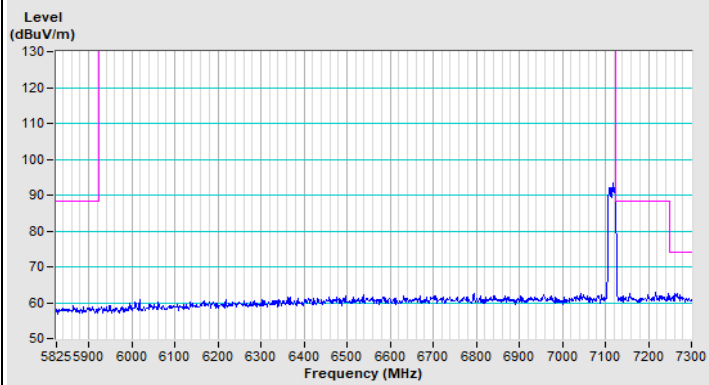


Vertical (Peak)

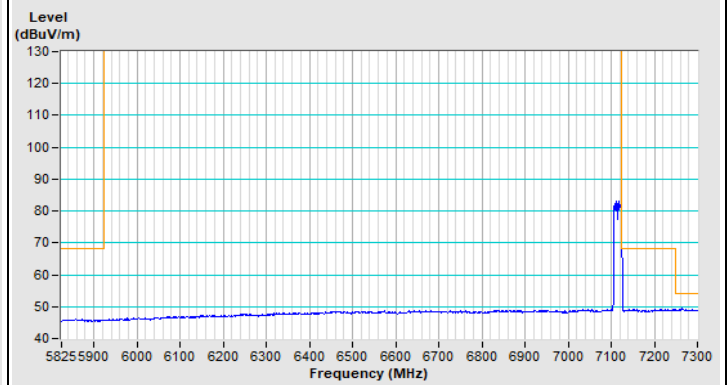

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 1

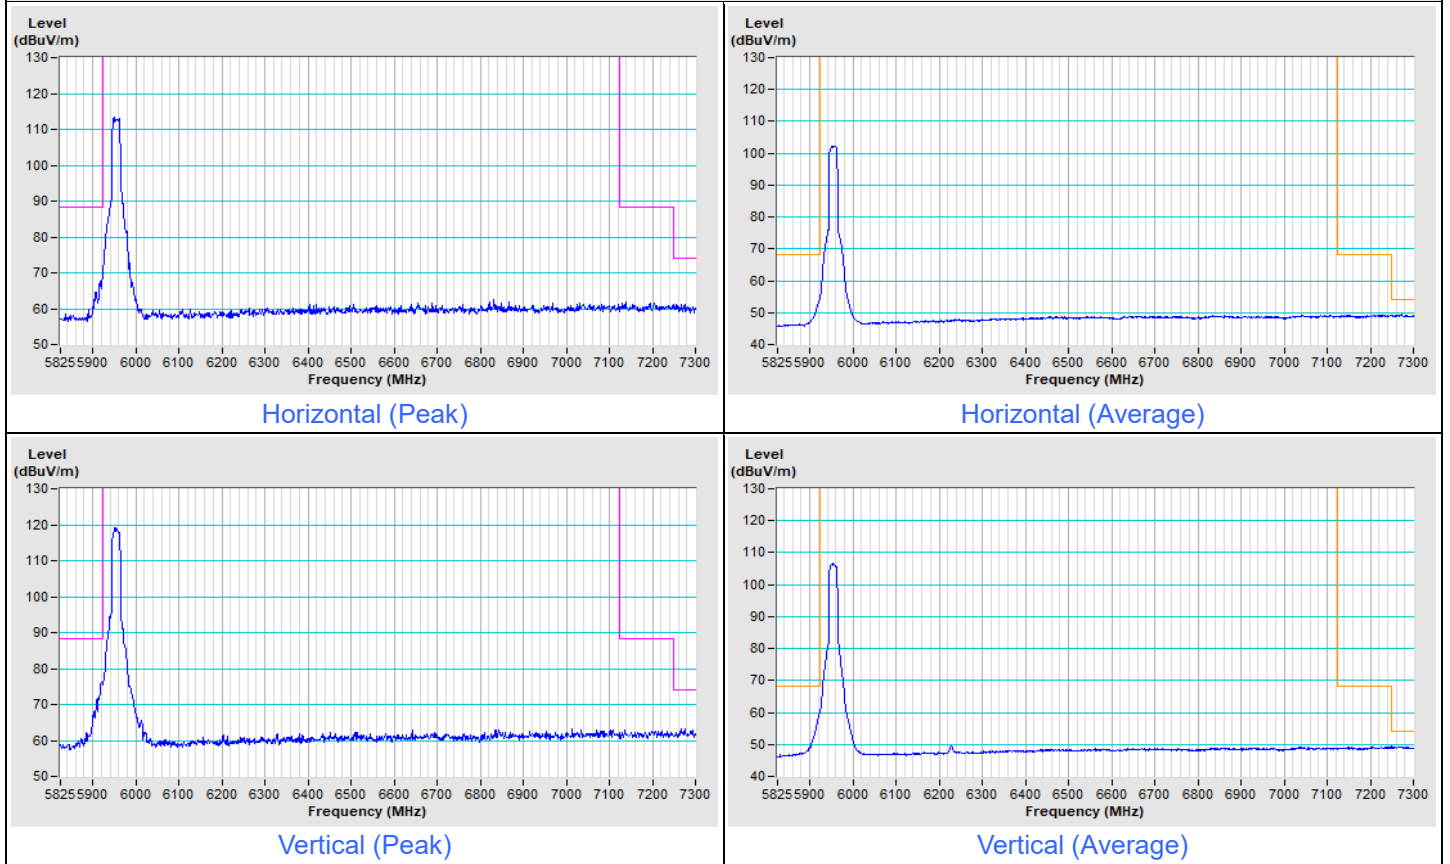





802.11be (EHT20) Channel 233

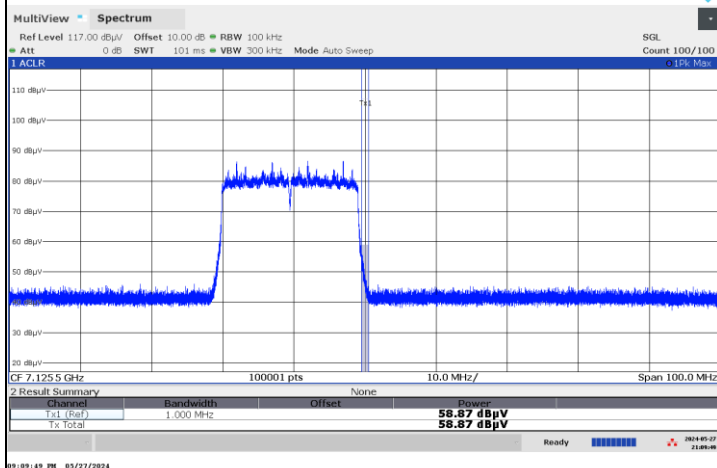


Horizontal (Peak)

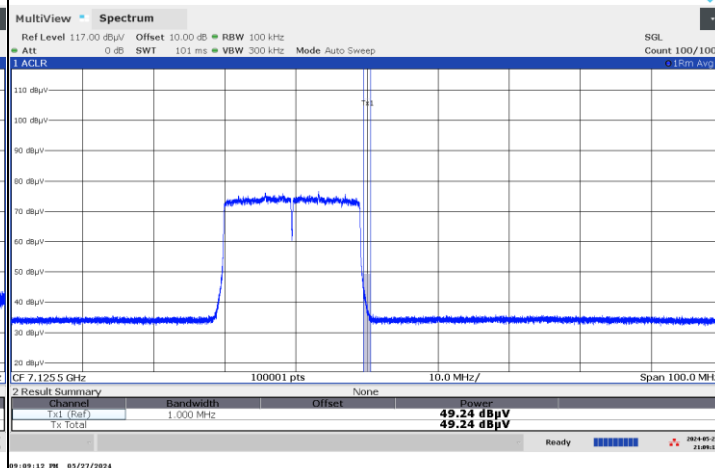

Horizontal (Average)

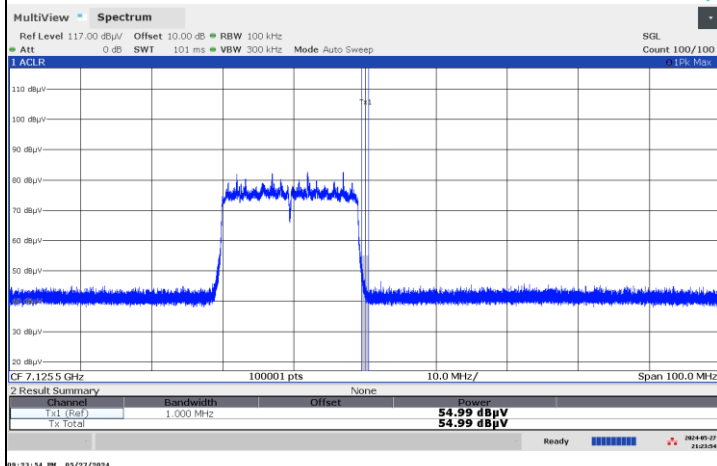


Vertical (Peak)

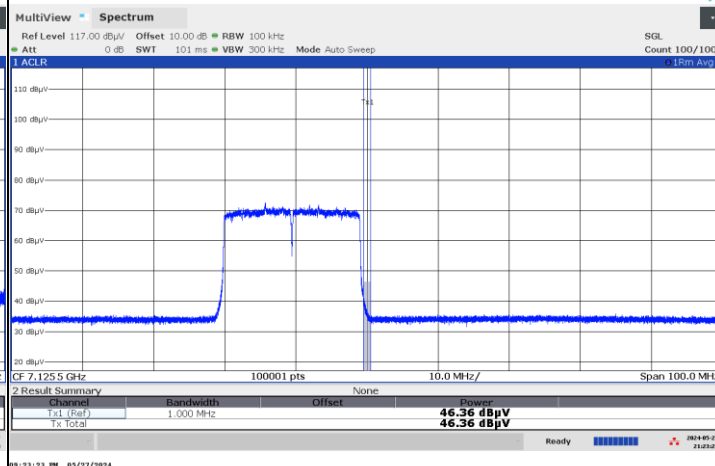


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

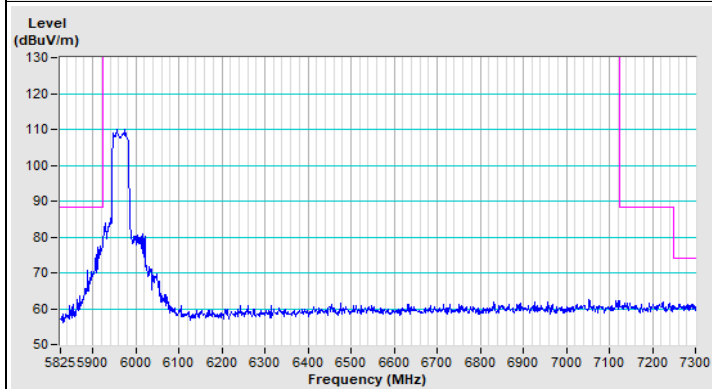


Horizontal (Peak)

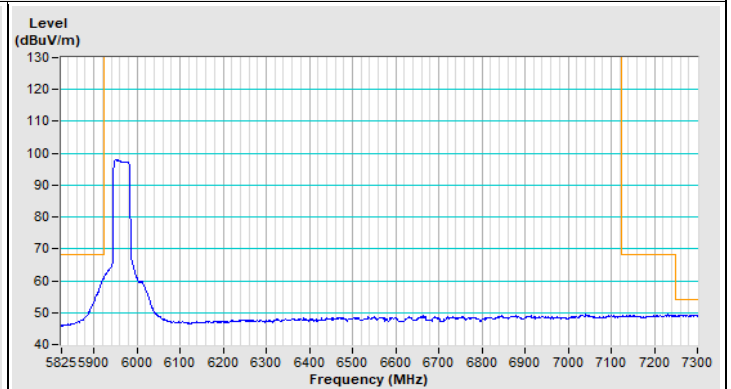

Horizontal (Average)

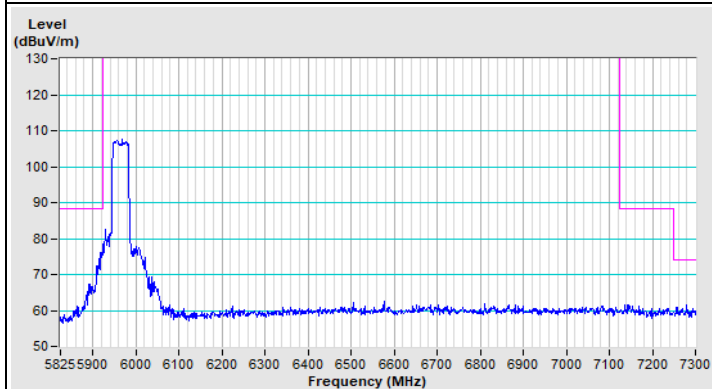


Vertical (Peak)

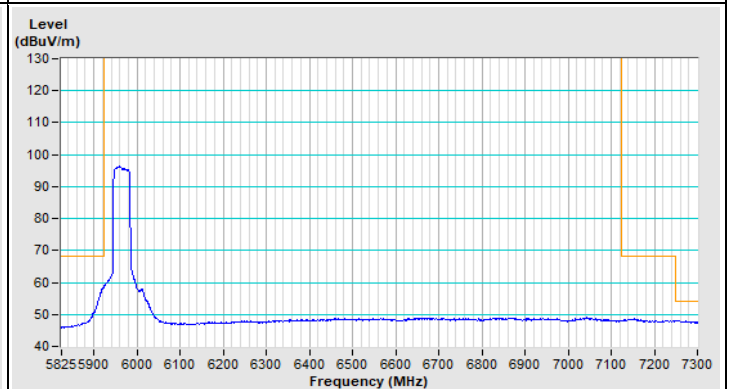


Vertical (Average)


802.11be (EHT40) Channel 227

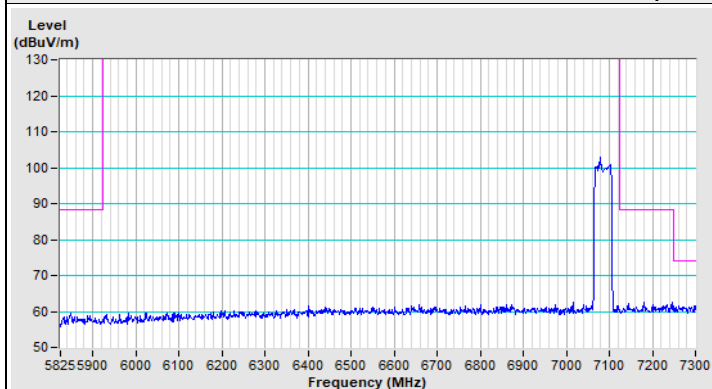


Horizontal (Peak)

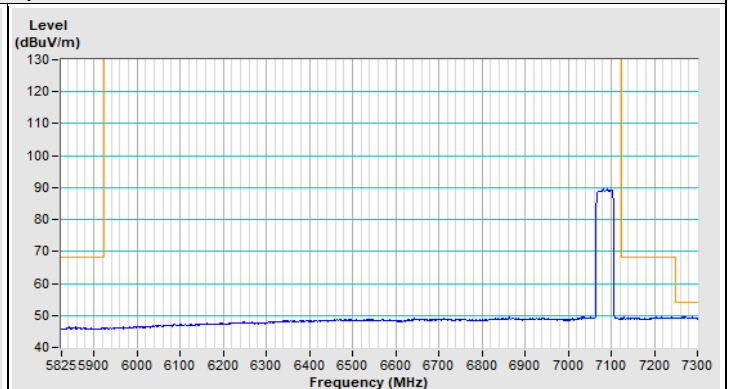

Horizontal (Average)

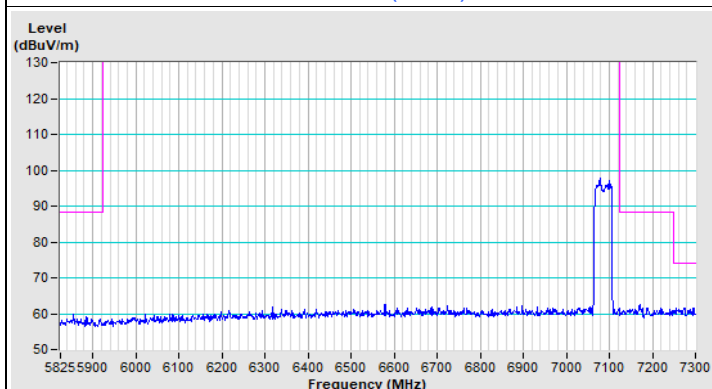


Vertical (Peak)

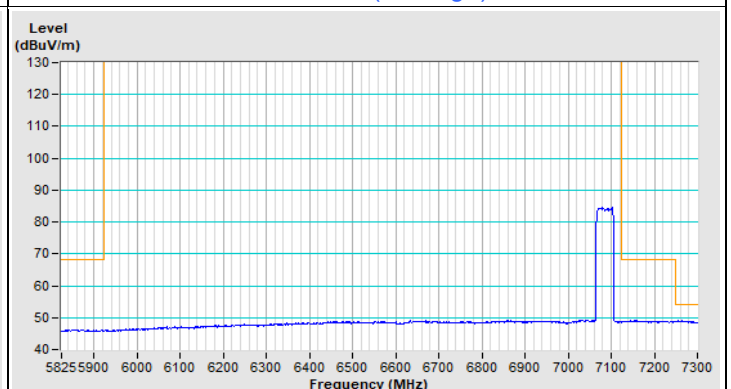


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

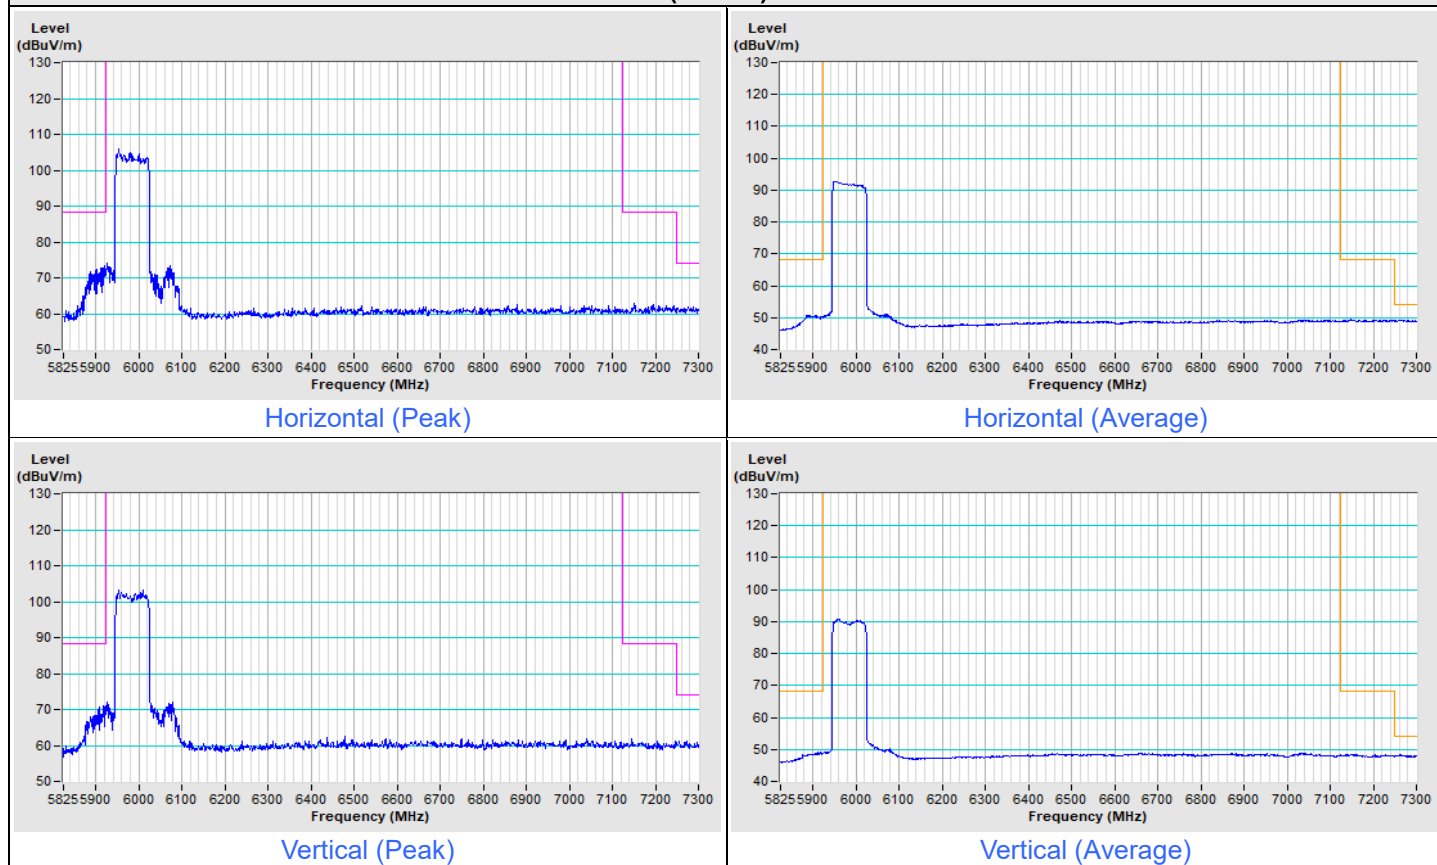


802.11be (EHT80) Channel 215

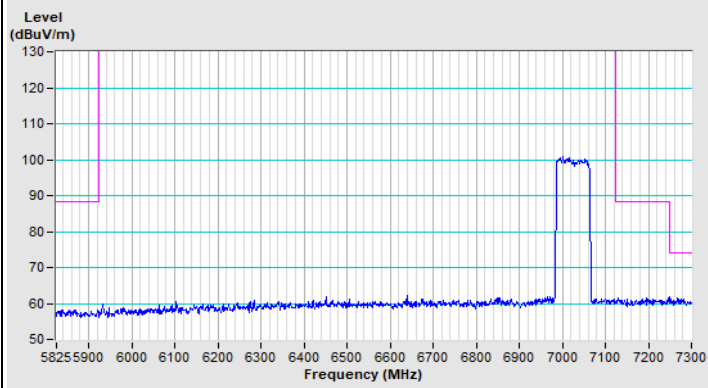


Horizontal (Peak)

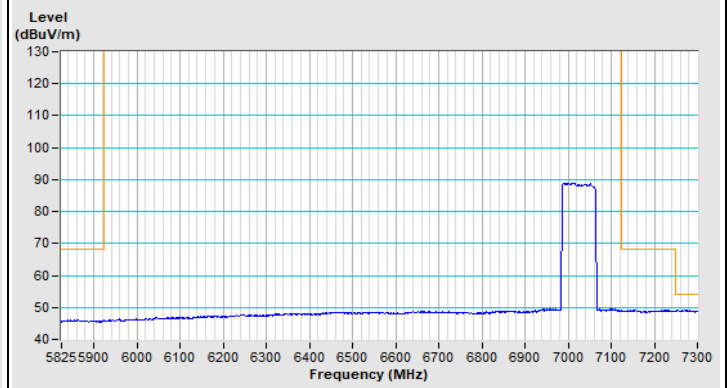

Horizontal (Average)

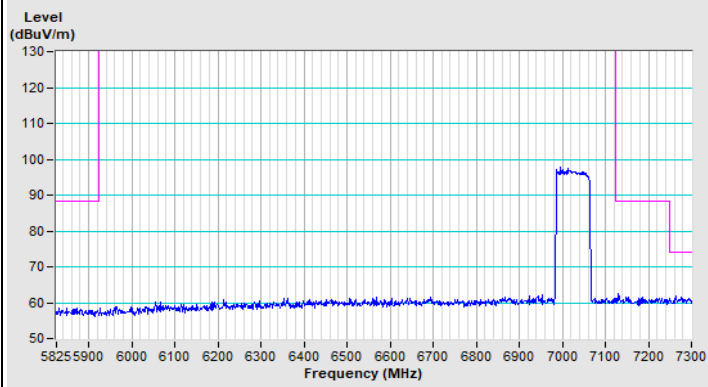


Vertical (Peak)

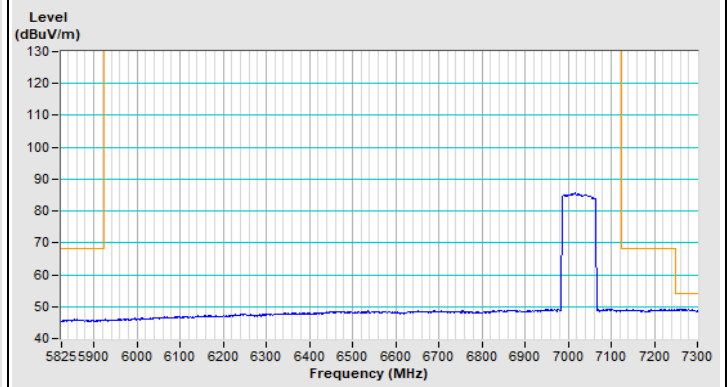


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

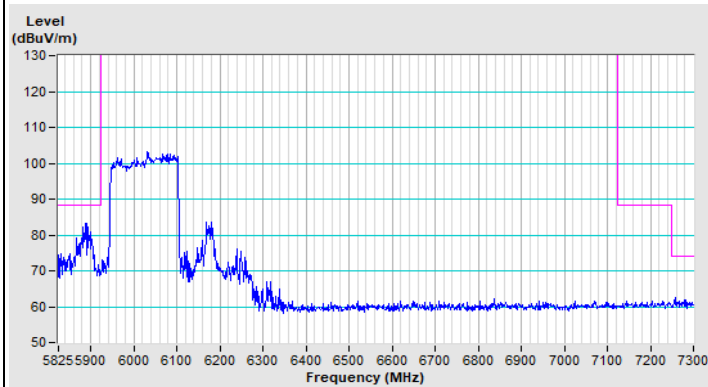


Horizontal (Peak)

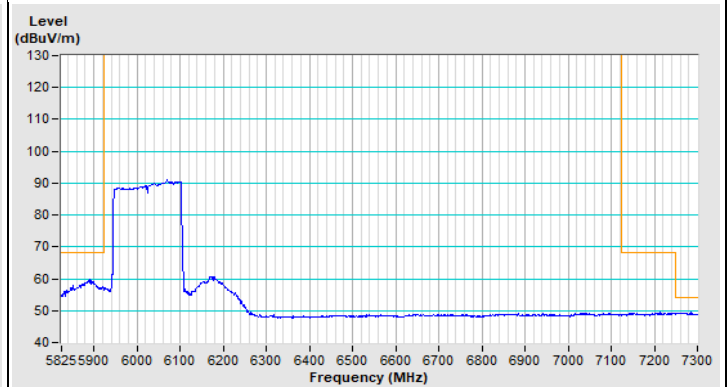

Horizontal (Average)

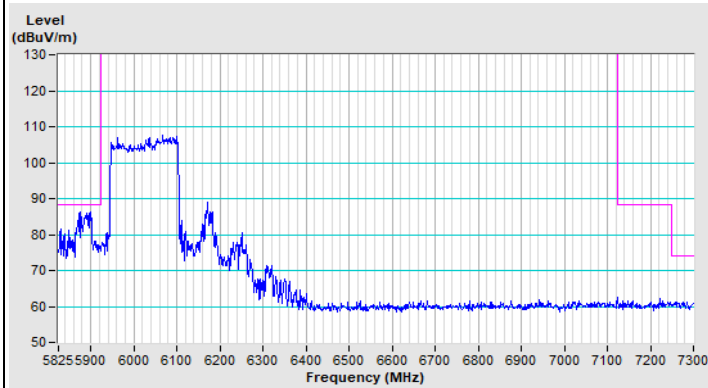


Vertical (Peak)

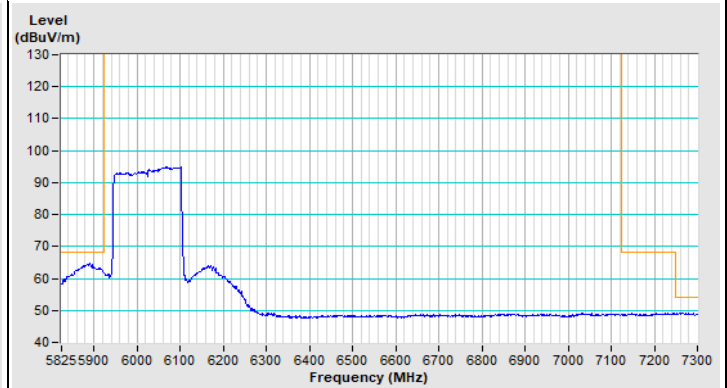


Vertical (Average)


802.11be (EHT160) Channel 207

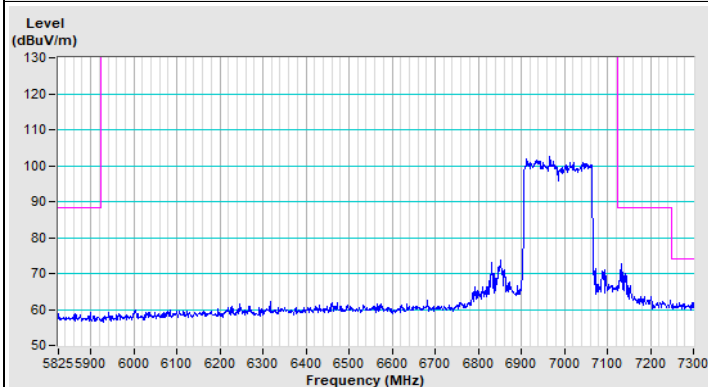


Horizontal (Peak)

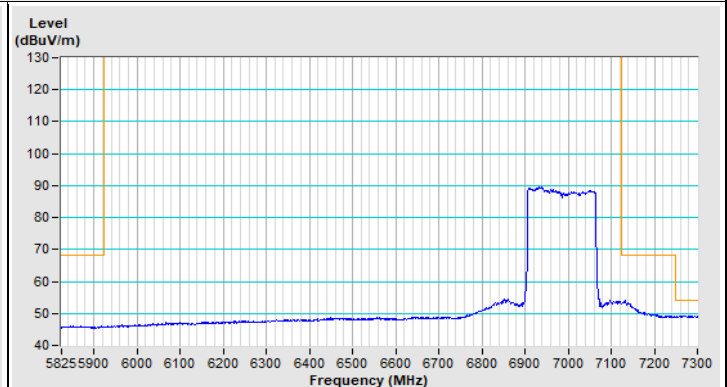

Horizontal (Average)

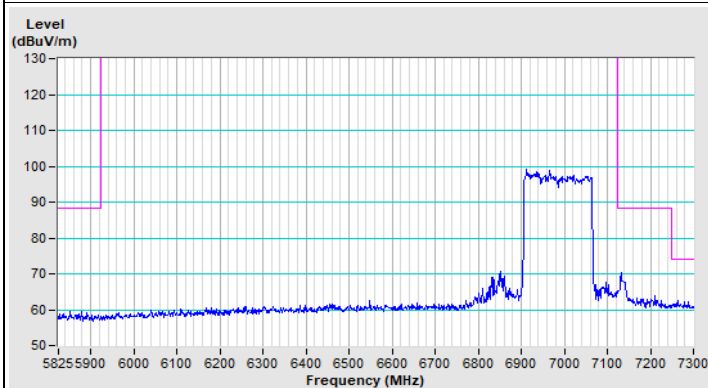

Vertical (Peak)

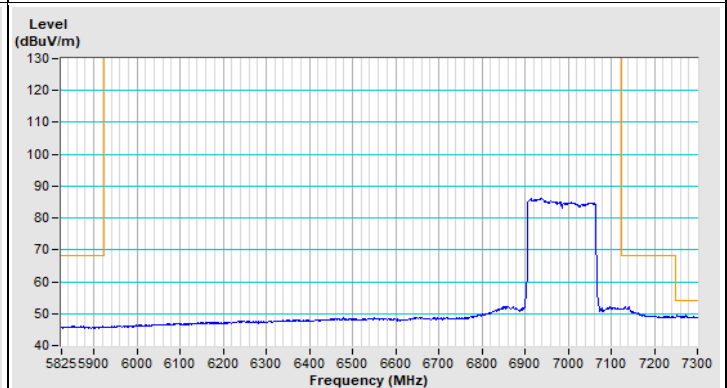


Vertical (Average)

Plot of Band Edge

Partial RU_2TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 26-tone RU Channel 1

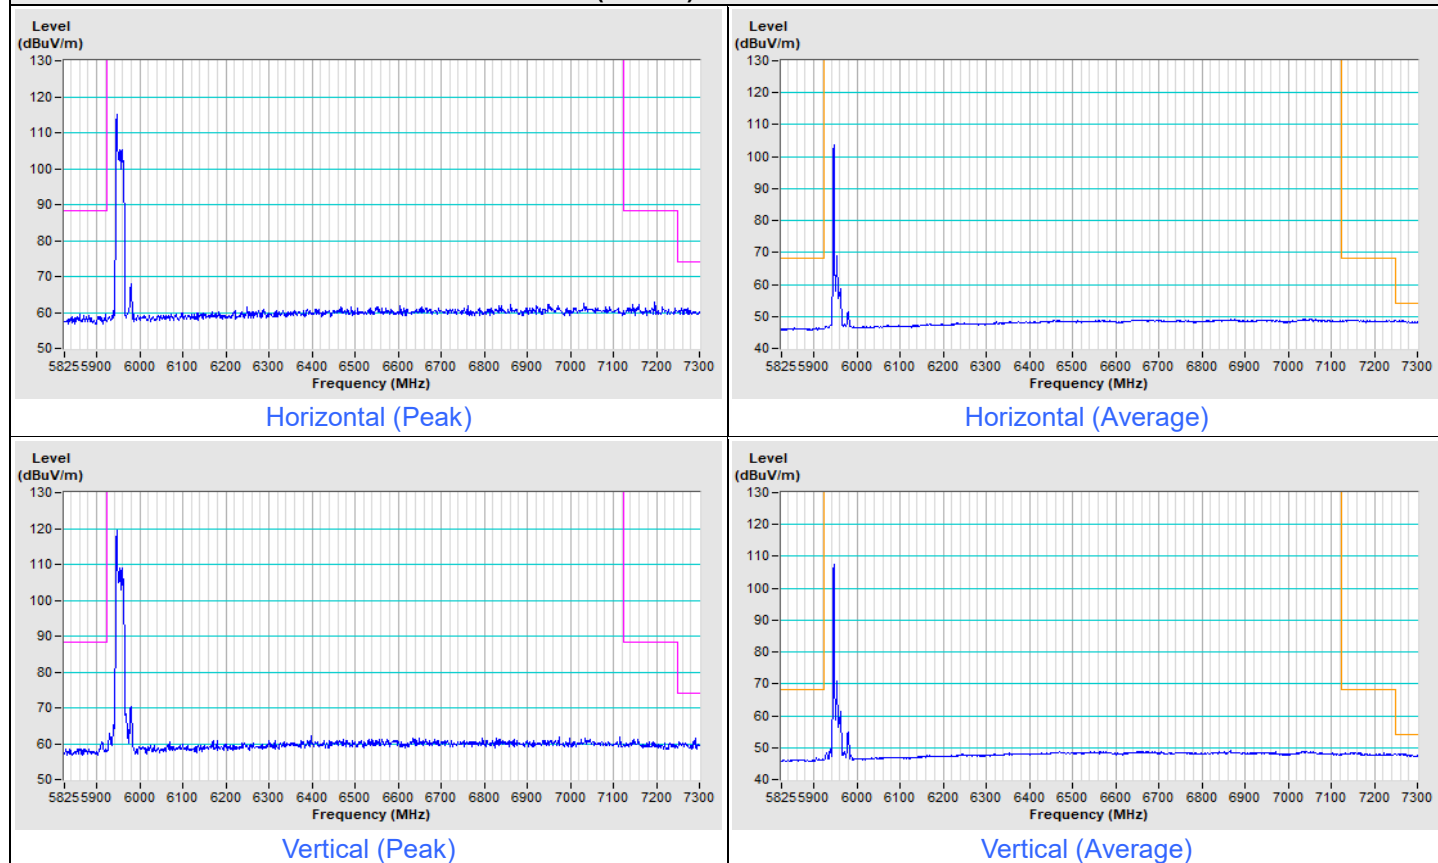

802.11be (EHT20) 26-tone Channel 233

