



Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

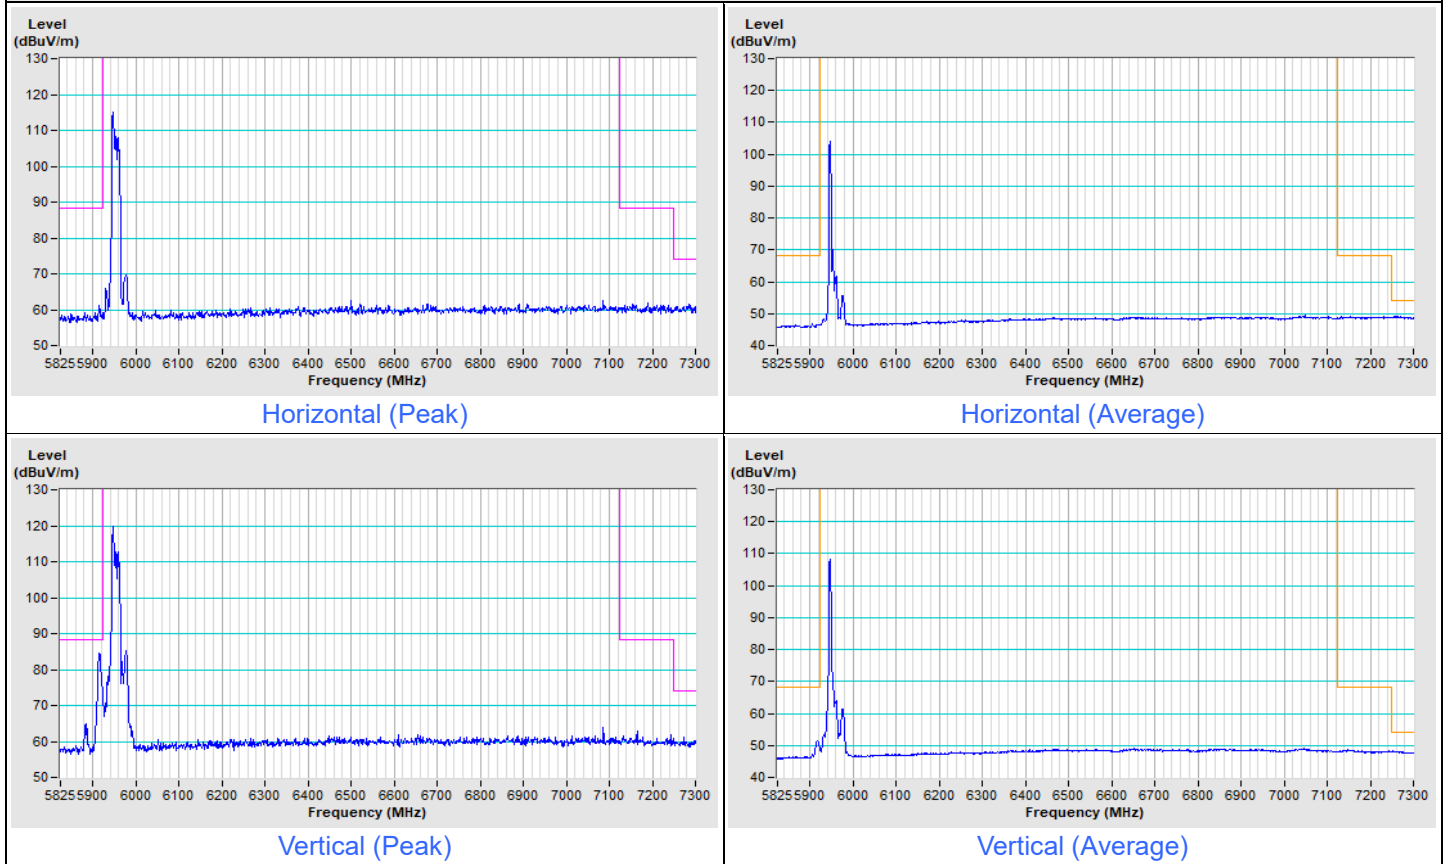


802.11be (EHT20) 52-tone Channel 233

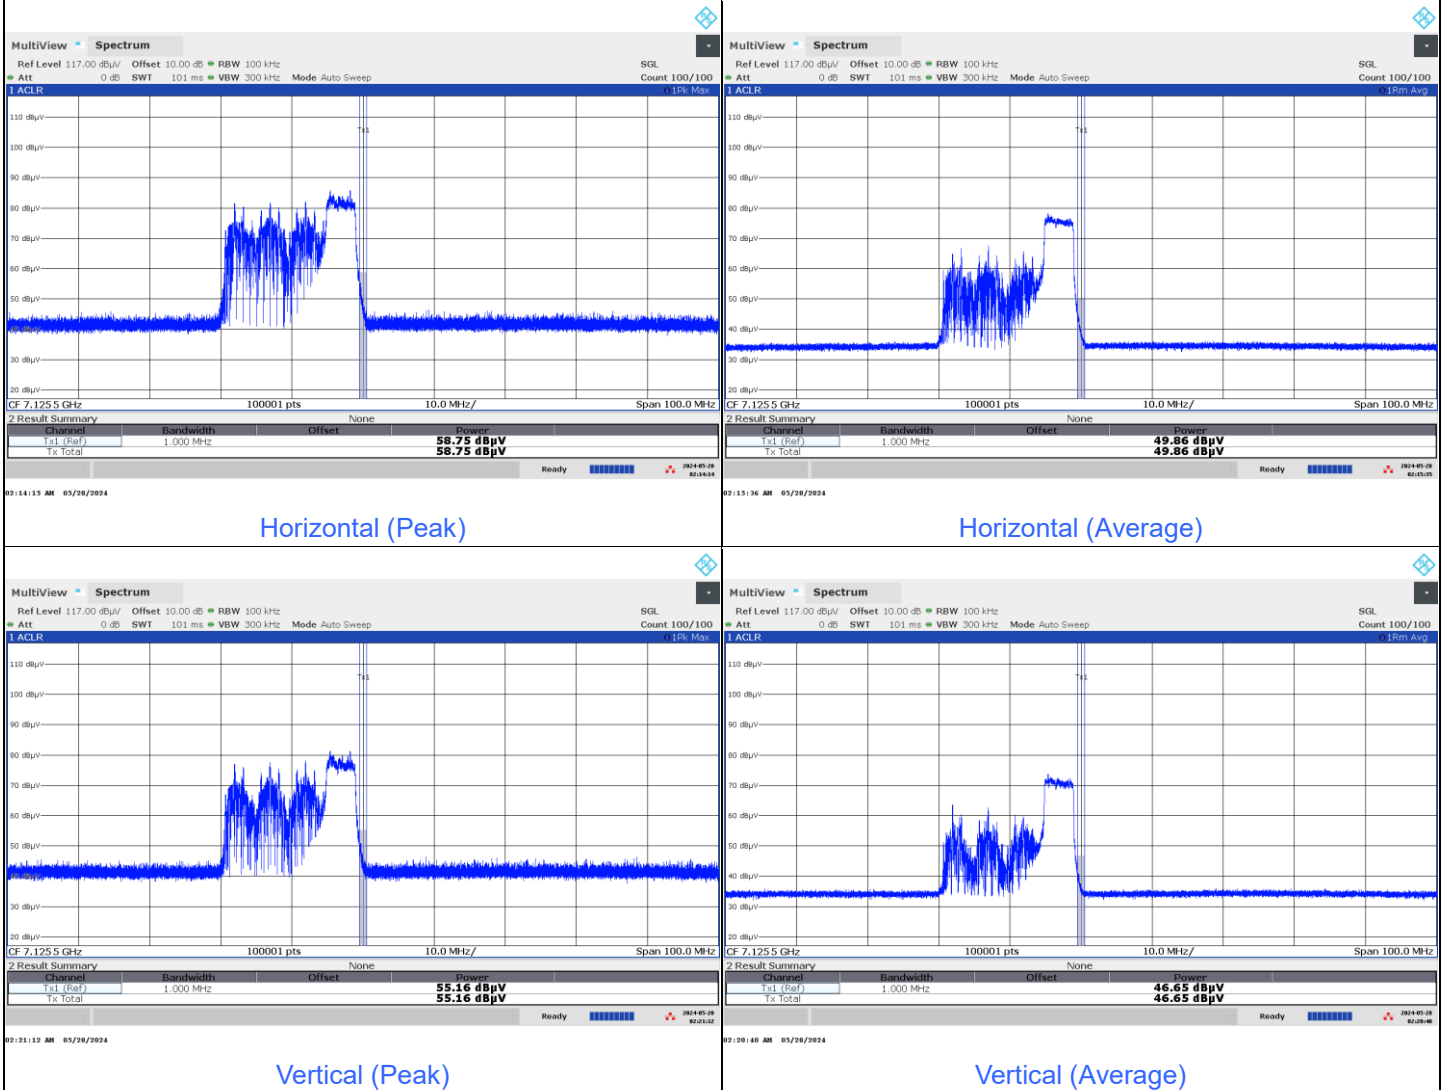


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

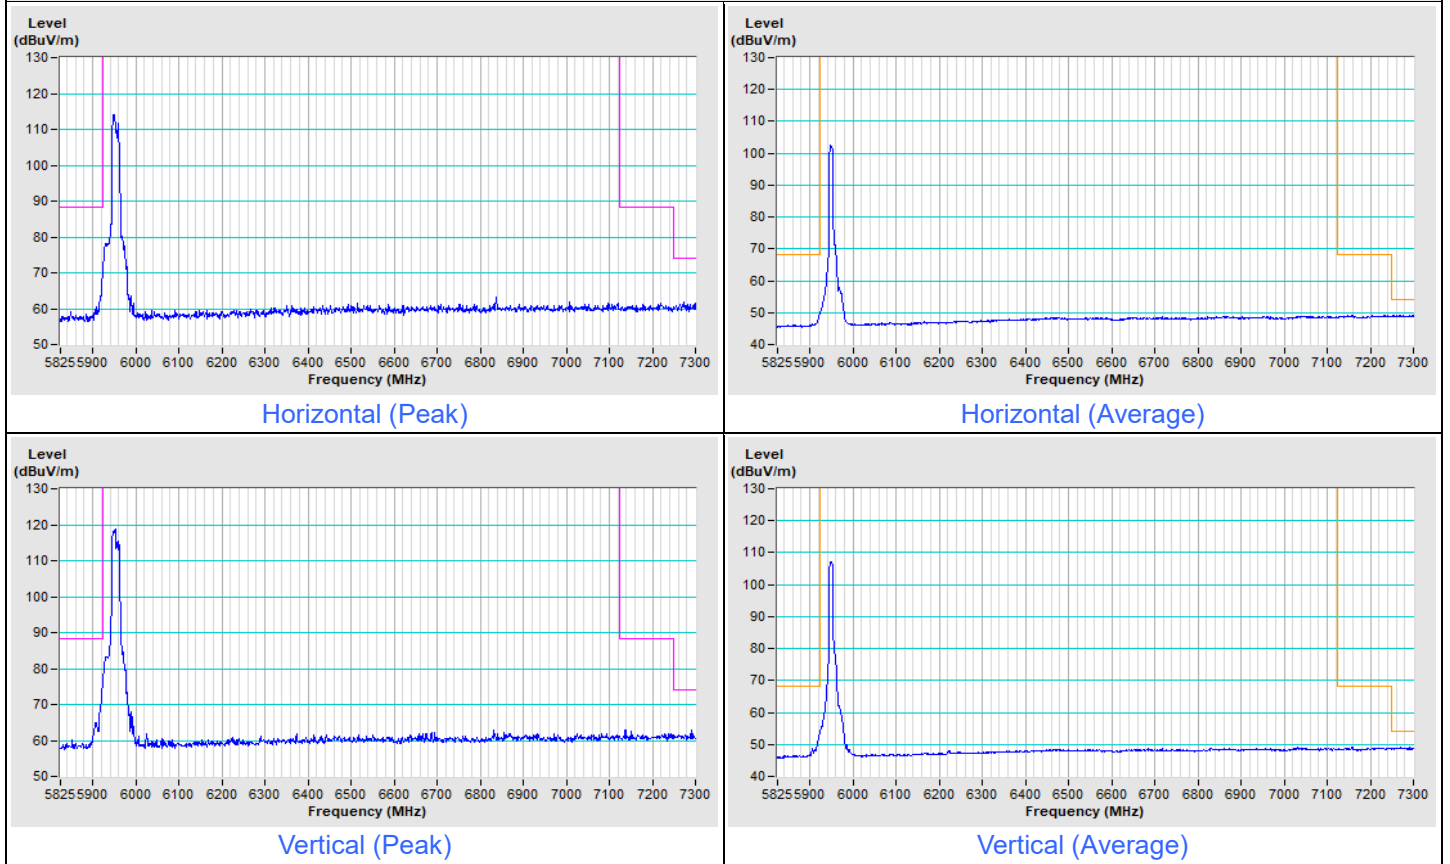

802.11be (EHT20) 106-tone Channel 233

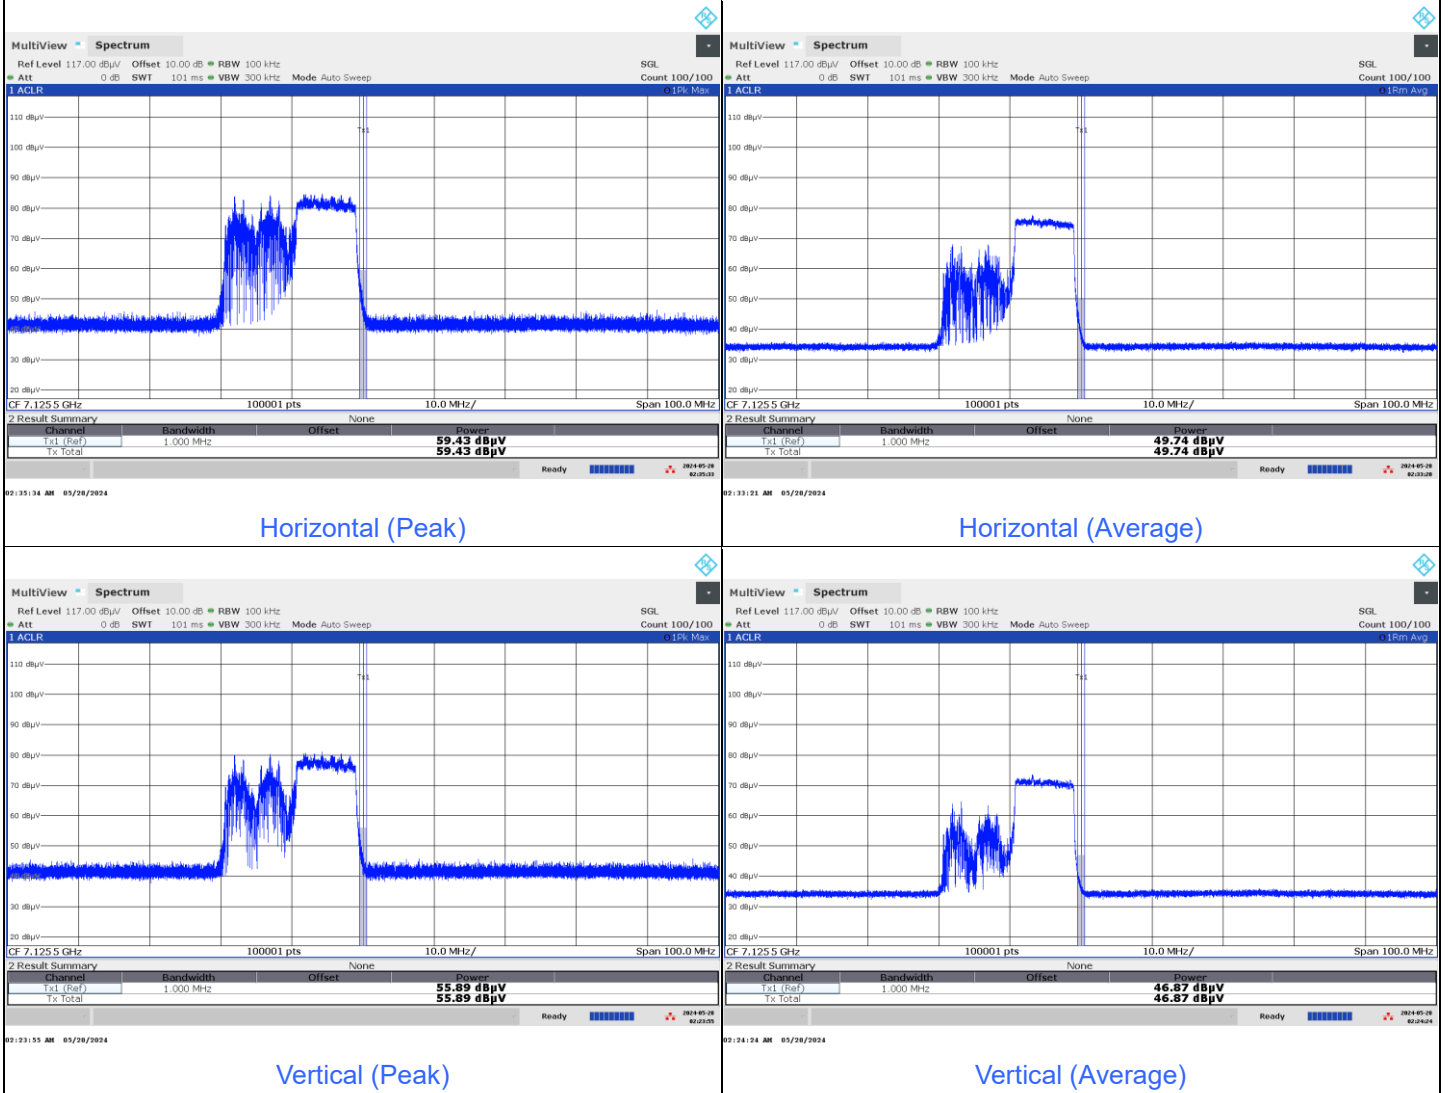

Mode B

under control of standard power AP

1TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.2 PK	88.2	-16.0	3.77 H	293	67.8	4.4
2	#5925.00	53.6 AV	68.2	-14.6	3.77 H	293	49.2	4.4
3	*5955.00	113.1 PK			3.77 H	293	70.9	42.2
4	*5955.00	103.5 AV			3.77 H	293	61.3	42.2
5	11910.00	57.6 PK	74.0	-16.4	1.68 H	256	49.0	8.6
6	11910.00	44.1 AV	54.0	-9.9	1.68 H	256	35.5	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.8 PK	88.2	-12.4	1.30 V	146	71.4	4.4
2	#5925.00	55.2 AV	68.2	-13.0	1.30 V	146	50.8	4.4
3	*5955.00	117.1 PK			1.30 V	146	74.9	42.2
4	*5955.00	107.3 AV			1.30 V	146	65.1	42.2
5	11910.00	57.5 PK	74.0	-16.5	1.36 V	309	48.9	8.6
6	11910.00	44.1 AV	54.0	-9.9	1.36 V	309	35.5	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	112.9 PK			2.28 H	315	69.7	43.2
2	*6195.00	103.1 AV			2.28 H	315	59.9	43.2
3	12390.00	58.3 PK	74.0	-15.7	1.61 H	258	49.4	8.9
4	12390.00	44.5 AV	54.0	-9.5	1.61 H	258	35.6	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.0 PK			1.20 V	149	72.8	43.2
2	*6195.00	106.0 AV			1.20 V	149	62.8	43.2
3	12390.00	58.0 PK	74.0	-16.0	1.35 V	301	49.1	8.9
4	12390.00	45.5 AV	54.0	-8.5	1.35 V	301	36.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.3 PK			2.30 H	315	68.7	44.6
2	*6415.00	103.4 AV			2.30 H	315	58.8	44.6
3	#12830.00	58.0 PK	88.2	-30.2	1.05 H	219	48.5	9.5
4	#12830.00	45.4 AV	68.2	-22.8	1.05 H	219	35.9	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.6 PK			1.06 V	130	72.0	44.6
2	*6415.00	106.6 AV			1.06 V	130	62.0	44.6
3	#12830.00	58.3 PK	88.2	-29.9	1.51 V	111	48.8	9.5
4	#12830.00	45.7 AV	68.2	-22.5	1.51 V	111	36.2	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.8 PK			2.80 H	294	71.9	44.9
2	*6535.00	106.7 AV			2.80 H	294	61.8	44.9
3	#13070.00	56.7 PK	88.2	-31.5	1.11 H	154	47.7	9.0
4	#13070.00	44.8 AV	68.2	-23.4	1.11 H	154	35.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.8 PK			1.91 V	104	67.9	44.9
2	*6535.00	102.9 AV			1.91 V	104	58.0	44.9
3	#13070.00	56.1 PK	88.2	-32.1	1.12 V	110	47.1	9.0
4	#13070.00	44.4 AV	68.2	-23.8	1.12 V	110	35.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.0 PK			2.80 H	294	72.0	45.0
2	*6695.00	107.1 AV			2.80 H	294	62.1	45.0
3	13390.00	57.8 PK	74.0	-16.2	1.62 H	254	48.2	9.6
4	13390.00	45.7 AV	54.0	-8.3	1.62 H	254	36.1	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.2 PK			1.03 V	139	69.2	45.0
2	*6695.00	104.3 AV			1.03 V	139	59.3	45.0
3	13390.00	58.4 PK	74.0	-15.6	1.37 V	302	48.8	9.6
4	13390.00	46.0 AV	54.0	-8.0	1.37 V	301	36.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.0 PK			2.80 H	294	71.7	45.3
2	*6855.00	107.3 AV			2.80 H	294	62.0	45.3
3	#13710.00	56.8 PK	88.2	-31.4	1.48 H	199	47.8	9.0
4	#13710.00	45.0 AV	68.2	-23.2	1.48 H	199	36.0	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.2 PK			1.91 V	104	67.9	45.3
2	*6855.00	103.7 AV			1.91 V	104	58.4	45.3
3	#13710.00	56.5 PK	88.2	-31.7	1.05 V	199	47.5	9.0
4	#13710.00	44.8 AV	68.2	-23.4	1.05 V	199	35.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.3 PK	88.2	-14.9	2.74 H	305	68.9	4.4
2	#5925.00	55.2 AV	68.2	-13.0	2.74 H	305	50.8	4.4
3	*5955.00	115.4 PK			2.74 H	305	73.2	42.2
4	*5955.00	103.0 AV			2.74 H	305	60.8	42.2
5	11910.00	56.9 PK	74.0	-17.1	1.56 H	273	48.3	8.6
6	11910.00	44.9 AV	54.0	-9.1	1.56 H	273	36.3	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.2 PK	88.2	-12.0	1.08 V	157	71.8	4.4
2	#5925.00	56.6 AV	68.2	-11.6	1.08 V	157	52.2	4.4
3	*5955.00	118.6 PK			1.08 V	157	76.4	42.2
4	*5955.00	106.3 AV			1.08 V	157	64.1	42.2
5	11910.00	57.7 PK	74.0	-16.3	1.42 V	311	49.1	8.6
6	11910.00	45.2 AV	54.0	-8.8	1.42 V	311	36.6	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	111.8 PK			2.25 H	315	68.6	43.2
2	*6195.00	101.9 AV			2.25 H	315	58.7	43.2
3	12390.00	57.4 PK	74.0	-16.6	1.14 H	1	48.5	8.9
4	12390.00	45.0 AV	54.0	-9.0	1.14 H	1	36.1	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.4 PK			1.21 V	150	72.2	43.2
2	*6195.00	105.7 AV			1.21 V	150	62.5	43.2
3	12390.00	57.6 PK	74.0	-16.4	1.57 V	319	48.7	8.9
4	12390.00	45.3 AV	54.0	-8.7	1.57 V	319	36.4	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.2 PK			2.77 H	297	70.6	44.6
2	*6415.00	103.1 AV			2.77 H	297	58.5	44.6
3	#12830.00	57.9 PK	88.2	-30.3	1.64 H	257	48.4	9.5
4	#12830.00	45.8 AV	68.2	-22.4	1.64 H	257	36.3	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.7 PK			1.00 V	140	73.1	44.6
2	*6415.00	105.7 AV			1.00 V	140	61.1	44.6
3	#12830.00	58.3 PK	88.2	-29.9	1.38 V	294	48.8	9.5
4	#12830.00	46.0 AV	68.2	-22.2	1.38 V	294	36.5	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.5 PK			2.80 H	294	71.6	44.9
2	*6535.00	106.4 AV			2.80 H	294	61.5	44.9
3	#13070.00	56.4 PK	88.2	-31.8	1.78 H	192	47.4	9.0
4	#13070.00	45.1 AV	68.2	-23.1	1.78 H	192	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.5 PK			1.91 V	104	67.6	44.9
2	*6535.00	102.4 AV			1.91 V	104	57.5	44.9
3	#13070.00	55.8 PK	88.2	-32.4	1.56 V	290	46.8	9.0
4	#13070.00	44.3 AV	68.2	-23.9	1.56 V	290	35.3	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.8 PK			2.81 H	295	73.8	45.0
2	*6695.00	106.7 AV			2.81 H	295	61.7	45.0
3	13390.00	58.0 PK	74.0	-16.0	1.62 H	253	48.4	9.6
4	13390.00	45.8 AV	54.0	-8.2	1.62 H	253	36.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.7 PK			1.07 V	135	70.7	45.0
2	*6695.00	103.5 AV			1.07 V	135	58.5	45.0
3	13390.00	58.5 PK	74.0	-15.5	1.36 V	303	48.9	9.6
4	13390.00	46.1 AV	54.0	-7.9	1.36 V	303	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.1 PK			2.83 H	293	72.8	45.3
2	*6855.00	106.1 AV			2.83 H	293	60.8	45.3
3	#13710.00	57.4 PK	88.2	-30.8	1.62 H	254	48.4	9.0
4	#13710.00	45.2 AV	68.2	-23.0	1.62 H	254	36.2	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.3 PK			1.00 V	143	70.0	45.3
2	*6855.00	103.2 AV			1.00 V	143	57.9	45.3
3	#13710.00	57.8 PK	88.2	-30.4	1.31 V	309	48.8	9.0
4	#13710.00	45.7 AV	68.2	-22.5	1.31 V	309	36.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.8 PK	88.2	-15.4	2.47 H	297	68.4	4.4
2	#5925.00	62.1 AV	68.2	-6.1	2.47 H	297	57.7	4.4
3	*5965.00	109.5 PK			2.47 H	297	67.3	42.2
4	*5965.00	97.1 AV			2.47 H	297	54.9	42.2
5	11930.00	55.8 PK	74.0	-18.2	1.54 H	75	47.2	8.6
6	11930.00	44.1 AV	54.0	-9.9	1.54 H	75	35.5	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.7 PK	88.2	-10.5	1.06 V	130	73.3	4.4
2	#5925.00	67.1 AV	68.2	-1.1	1.06 V	130	62.7	4.4
3	*5965.00	112.7 PK			1.06 V	130	70.5	42.2
4	*5965.00	100.6 AV			1.06 V	130	58.4	42.2
5	11930.00	56.2 PK	74.0	-17.8	1.05 V	197	47.6	8.6
6	11930.00	44.4 AV	54.0	-9.6	1.05 V	197	35.8	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	111.5 PK			2.61 H	308	68.2	43.3
2	*6205.00	99.2 AV			2.61 H	308	55.9	43.3
3	12410.00	57.0 PK	74.0	-17.0	1.53 H	252	48.2	8.8
4	12410.00	44.6 AV	54.0	-9.4	1.53 H	252	35.8	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.7 PK			1.08 V	140	71.4	43.3
2	*6205.00	102.5 AV			1.08 V	140	59.2	43.3
3	12410.00	57.4 PK	74.0	-16.6	1.38 V	297	48.6	8.8
4	12410.00	45.0 AV	54.0	-9.0	1.38 V	297	36.2	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.1 PK			2.47 H	297	66.6	44.5
2	*6405.00	99.4 AV			2.47 H	297	54.9	44.5
3	#12810.00	56.8 PK	88.2	-31.4	1.54 H	169	47.2	9.6
4	#12810.00	44.3 AV	68.2	-23.9	1.54 H	169	34.7	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.3 PK			1.06 V	130	69.8	44.5
2	*6405.00	102.4 AV			1.06 V	130	57.9	44.5
3	#12810.00	57.2 PK	88.2	-31.0	1.59 V	2	47.6	9.6
4	#12810.00	45.3 AV	68.2	-22.9	1.59 V	2	35.7	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	116.8 PK			2.73 H	303	71.9	44.9
2	*6565.00	104.4 AV			2.73 H	303	59.5	44.9
3	#13130.00	58.1 PK	88.2	-30.1	1.05 H	214	49.1	9.0
4	#13130.00	45.8 AV	68.2	-22.4	1.05 H	214	36.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.0 PK			1.05 V	141	69.1	44.9
2	*6565.00	102.7 AV			1.05 V	141	57.8	44.9
3	#13130.00	58.0 PK	88.2	-30.2	1.59 V	300	49.0	9.0
4	#13130.00	45.5 AV	68.2	-22.7	1.59 V	300	36.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	117.0 PK			2.73 H	302	72.0	45.0
2	*6685.00	104.6 AV			2.73 H	302	59.6	45.0
3	13370.00	57.8 PK	74.0	-16.2	1.52 H	254	48.3	9.5
4	13370.00	45.5 AV	54.0	-8.5	1.52 H	254	36.0	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	114.2 PK			1.05 V	141	69.2	45.0
2	*6685.00	101.8 AV			1.05 V	141	56.8	45.0
3	13370.00	58.1 PK	74.0	-15.9	1.34 V	300	48.6	9.5
4	13370.00	45.9 AV	54.0	-8.1	1.34 V	300	36.4	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	116.3 PK			2.71 H	292	71.0	45.3
2	*6845.00	103.9 AV			2.71 H	292	58.6	45.3
3	#13690.00	57.3 PK	88.2	-30.9	1.53 H	262	48.2	9.1
4	#13690.00	44.7 AV	68.2	-23.5	1.53 H	262	35.6	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.6 PK			1.05 V	147	68.3	45.3
2	*6845.00	101.1 AV			1.05 V	147	55.8	45.3
3	#13690.00	57.6 PK	88.2	-30.6	1.38 V	295	48.5	9.1
4	#13690.00	45.3 AV	68.2	-22.9	1.38 V	295	36.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.1 PK	88.2	-10.1	2.72 H	296	73.7	4.4
2	#5925.00	59.0 AV	68.2	-9.2	2.72 H	296	54.6	4.4
3	*5985.00	107.0 PK			2.72 H	296	64.8	42.2
4	*5985.00	95.2 AV			2.72 H	296	53.0	42.2
5	11970.00	56.4 PK	74.0	-17.6	1.17 H	240	47.8	8.6
6	11970.00	44.5 AV	54.0	-9.5	1.17 H	240	35.9	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.3 PK	88.2	-3.9	1.06 V	130	79.9	4.4
2	#5925.00	66.1 AV	68.2	-2.1	1.06 V	130	61.7	4.4
3	*5985.00	111.0 PK			1.06 V	130	68.8	42.2
4	*5985.00	99.3 AV			1.06 V	130	57.1	42.2
5	11970.00	56.8 PK	74.0	-17.2	1.67 V	344	48.2	8.6
6	11970.00	44.9 AV	54.0	-9.1	1.67 V	344	36.3	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.6 PK			2.72 H	296	66.2	43.4
2	*6225.00	97.4 AV			2.72 H	296	54.0	43.4
3	12450.00	56.6 PK	74.0	-17.4	1.64 H	2	48.0	8.6
4	12450.00	44.7 AV	54.0	-9.3	1.64 H	2	36.1	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	113.3 PK			1.06 V	130	69.9	43.4
2	*6225.00	111.4 AV			1.06 V	130	68.0	43.4
3	12450.00	57.1 PK	74.0	-16.9	1.05 V	100	48.5	8.6
4	12450.00	45.2 AV	54.0	-8.8	1.05 V	100	36.6	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.8 PK			2.57 H	312	65.4	44.4
2	*6385.00	97.5 AV			2.57 H	312	53.1	44.4
3	#12770.00	57.8 PK	88.2	-30.4	1.72 H	267	48.2	9.6
4	#12770.00	45.4 AV	68.2	-22.8	1.72 H	267	35.8	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.1 PK			1.01 V	137	68.7	44.4
2	*6385.00	100.7 AV			1.01 V	137	56.3	44.4
3	#12770.00	58.2 PK	88.2	-30.0	1.42 V	312	48.6	9.6
4	#12770.00	45.9 AV	68.2	-22.3	1.42 V	312	36.3	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.2 PK			2.68 H	300	67.3	44.9
2	*6625.00	110.6 AV			2.68 H	300	65.7	44.9
3	13250.00	58.0 PK	74.0	-16.0	1.67 H	91	48.9	9.1
4	13250.00	45.7 AV	54.0	-8.3	1.67 H	91	36.6	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.1 PK			1.08 V	141	65.2	44.9
2	*6625.00	98.6 AV			1.08 V	141	53.7	44.9
3	13250.00	57.8 PK	74.0	-16.2	1.59 V	310	48.7	9.1
4	13250.00	45.5 AV	54.0	-8.5	1.59 V	310	36.4	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	113.5 PK			2.70 H	295	68.5	45.0
2	*6705.00	101.1 AV			2.70 H	295	56.1	45.0
3	#13410.00	57.9 PK	88.2	-30.3	1.58 H	251	48.2	9.7
4	#13410.00	45.4 AV	68.2	-22.8	1.58 H	251	35.7	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.8 PK			1.08 V	148	65.8	45.0
2	*6705.00	98.3 AV			1.08 V	148	53.3	45.0
3	#13410.00	58.2 PK	88.2	-30.0	1.46 V	315	48.5	9.7
4	#13410.00	45.8 AV	68.2	-22.4	1.46 V	315	36.1	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.1 PK			2.67 H	300	67.1	45.0
2	*6785.00	110.3 AV			2.67 H	300	65.3	45.0
3	#13570.00	57.9 PK	88.2	-30.3	1.65 H	9	48.9	9.0
4	#13570.00	45.3 AV	68.2	-22.9	1.65 H	9	36.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.0 PK			1.10 V	145	65.0	45.0
2	*6785.00	98.3 AV			1.10 V	145	53.3	45.0
3	#13570.00	57.0 PK	88.2	-31.2	1.68 V	306	48.0	9.0
4	#13570.00	44.9 AV	68.2	-23.3	1.68 V	306	35.9	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5889.00	77.8 PK	88.2	-10.4	2.55 H	309	73.5	4.3
2	#5889.00	55.4 AV	68.2	-12.8	2.55 H	309	51.1	4.3
3	*6025.00	103.2 PK			2.55 H	309	60.9	42.3
4	*6025.00	90.4 AV			2.55 H	309	48.1	42.3
5	12050.00	56.5 PK	74.0	-17.5	1.45 H	291	47.9	8.6
6	12050.00	44.1 AV	54.0	-9.9	1.45 H	291	35.5	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5889.00	81.4 PK	88.2	-6.8	1.09 V	156	77.1	4.3
2	#5889.00	59.3 AV	68.2	-8.9	1.09 V	156	55.0	4.3
3	*6025.00	105.8 PK			1.09 V	156	63.5	42.3
4	*6025.00	93.5 AV			1.09 V	156	51.2	42.3
5	12050.00	57.0 PK	74.0	-17.0	1.48 V	303	48.4	8.6
6	12050.00	44.7 AV	54.0	-9.3	1.48 V	303	36.1	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	103.7 PK			2.55 H	310	60.5	43.2
2	*6185.00	91.8 AV			2.55 H	310	48.6	43.2
3	12370.00	56.4 PK	74.0	-17.6	1.59 H	99	47.6	8.8
4	12370.00	44.3 AV	54.0	-9.7	1.59 H	99	35.5	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.5 PK			1.10 V	154	62.3	43.2
2	*6185.00	93.7 AV			1.10 V	154	50.5	43.2
3	12370.00	56.8 PK	74.0	-17.2	1.67 V	7	48.0	8.8
4	12370.00	44.5 AV	54.0	-9.5	1.67 V	7	35.7	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	103.4 PK			2.50 H	309	59.2	44.2
2	*6345.00	91.2 AV			2.50 H	309	47.0	44.2
3	12690.00	55.9 PK	74.0	-18.1	1.54 H	100	46.3	9.6
4	12690.00	44.2 AV	54.0	-9.8	1.54 H	100	34.6	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.3 PK			1.10 V	154	61.1	44.2
2	*6345.00	93.1 AV			1.10 V	154	48.9	44.2
3	12690.00	56.3 PK	74.0	-17.7	1.85 V	174	46.7	9.6
4	12690.00	44.9 AV	54.0	-9.1	1.85 V	174	35.3	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.8 PK			2.51 H	295	59.8	45.0
2	*6665.00	92.5 AV			2.51 H	295	47.5	45.0
3	13330.00	57.5 PK	74.0	-16.5	1.55 H	263	48.3	9.2
4	13330.00	45.0 AV	54.0	-9.0	1.55 H	263	35.8	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.9 PK			1.07 V	143	56.9	45.0
2	*6665.00	89.7 AV			1.07 V	143	44.7	45.0
3	13330.00	57.8 PK	74.0	-16.2	1.41 V	307	48.6	9.2
4	13330.00	45.4 AV	54.0	-8.6	1.41 V	307	36.2	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Partial RU_1TX

26-tone RU

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.5 PK	88.2	-25.7	2.75 H	310	58.1	4.4
2	#5925.00	46.8 AV	68.2	-21.4	2.75 H	310	42.4	4.4
3	*5955.00	118.1 PK			2.75 H	310	75.9	42.2
4	*5955.00	105.3 AV			2.75 H	310	63.1	42.2
5	11910.00	57.1 PK	74.0	-16.9	1.74 H	253	48.5	8.6
6	11910.00	44.9 AV	54.0	-9.1	1.74 H	253	36.3	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.7 PK	88.2	-23.5	1.07 V	137	60.3	4.4
2	#5925.00	47.9 AV	68.2	-20.3	1.07 V	137	43.5	4.4
3	*5955.00	121.4 PK			1.07 V	137	79.2	42.2
4	*5955.00	108.6 AV			1.07 V	137	66.4	42.2
5	11910.00	57.8 PK	74.0	-16.2	1.43 V	315	49.2	8.6
6	11910.00	45.2 AV	54.0	-8.8	1.43 V	315	36.6	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.9 PK			2.73 H	314	73.7	43.2
2	*6195.00	104.8 AV			2.73 H	314	61.6	43.2
3	12390.00	57.5 PK	74.0	-16.5	1.82 H	264	48.6	8.9
4	12390.00	45.3 AV	54.0	-8.7	1.82 H	264	36.4	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.3 PK			1.12 V	141	77.1	43.2
2	*6195.00	108.0 AV			1.12 V	141	64.8	43.2
3	12390.00	58.1 PK	74.0	-15.9	1.32 V	317	49.2	8.9
4	12390.00	45.6 AV	54.0	-8.4	1.32 V	317	36.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.8 PK			2.70 H	310	71.2	44.6
2	*6415.00	103.7 AV			2.70 H	310	59.1	44.6
3	#12830.00	57.3 PK	88.2	-30.9	1.45 H	144	47.8	9.5
4	#12830.00	44.5 AV	68.2	-23.7	1.45 H	144	35.0	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.4 PK			1.12 V	141	74.8	44.6
2	*6415.00	107.4 AV			1.12 V	141	62.8	44.6
3	#12830.00	58.0 PK	88.2	-30.2	1.45 V	314	48.5	9.5
4	#12830.00	45.4 AV	68.2	-22.8	1.45 V	314	35.9	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.8 PK			2.70 H	310	74.9	44.9
2	*6535.00	107.7 AV			2.70 H	310	62.8	44.9
3	#13070.00	57.4 PK	88.2	-30.8	1.95 H	9	48.4	9.0
4	#13070.00	45.5 AV	68.2	-22.7	1.95 H	9	36.5	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.3 PK			1.10 V	145	71.4	44.9
2	*6535.00	104.7 AV			1.10 V	145	59.8	44.9
3	#13070.00	57.0 PK	88.2	-31.2	1.74 V	2	48.0	9.0
4	#13070.00	45.1 AV	68.2	-23.1	1.74 V	2	36.1	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.6 PK			2.54 H	301	72.6	45.0
2	*6695.00	106.7 AV			2.54 H	301	61.7	45.0
3	13390.00	58.2 PK	74.0	-15.8	1.71 H	256	48.6	9.6
4	13390.00	45.8 AV	54.0	-8.2	1.71 H	256	36.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.6 PK			1.08 V	139	69.6	45.0
2	*6695.00	103.6 AV			1.08 V	138	58.6	45.0
3	13390.00	58.4 PK	74.0	-15.6	1.37 V	316	48.8	9.6
4	13390.00	46.1 AV	54.0	-7.9	1.37 V	316	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.2 PK			2.87 H	292	72.9	45.3
2	*6855.00	107.1 AV			2.87 H	292	61.8	45.3
3	#13710.00	57.4 PK	88.2	-30.8	1.58 H	267	48.4	9.0
4	#13710.00	45.1 AV	68.2	-23.1	1.58 H	267	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.2 PK			1.16 V	143	69.9	45.3
2	*6855.00	104.0 AV			1.16 V	143	58.7	45.3
3	#13710.00	57.6 PK	88.2	-30.6	1.33 V	324	48.6	9.0
4	#13710.00	45.4 AV	68.2	-22.8	1.33 V	324	36.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

52-tone RU

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	2.77 H	312	59.5	4.4
2	#5925.00	47.1 AV	68.2	-21.1	2.77 H	312	42.7	4.4
3	*5955.00	118.3 PK			2.77 H	312	76.1	42.2
4	*5955.00	105.1 AV			2.77 H	312	62.9	42.2
5	11910.00	57.1 PK	74.0	-16.9	1.72 H	257	48.5	8.6
6	11910.00	44.8 AV	54.0	-9.2	1.72 H	257	36.2	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.3 PK	88.2	-22.9	1.06 V	137	60.9	4.4
2	#5925.00	48.1 AV	68.2	-20.1	1.06 V	137	43.7	4.4
3	*5955.00	121.6 PK			1.06 V	137	79.4	42.2
4	*5955.00	108.5 AV			1.06 V	137	66.3	42.2
5	11910.00	57.7 PK	74.0	-16.3	1.36 V	304	49.1	8.6
6	11910.00	45.1 AV	54.0	-8.9	1.36 V	304	36.5	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.8 PK			2.71 H	311	73.6	43.2
2	*6195.00	105.4 AV			2.71 H	311	62.2	43.2
3	12390.00	57.4 PK	74.0	-16.6	1.77 H	259	48.5	8.9
4	12390.00	45.2 AV	54.0	-8.8	1.77 H	259	36.3	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.9 PK			1.13 V	139	76.7	43.2
2	*6195.00	108.6 AV			1.13 V	139	65.4	43.2
3	12390.00	57.8 PK	74.0	-16.2	1.39 V	307	48.9	8.9
4	12390.00	45.6 AV	54.0	-8.4	1.39 V	307	36.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.6 PK			2.71 H	311	72.0	44.6
2	*6415.00	105.2 AV			2.71 H	311	60.6	44.6
3	#12830.00	57.1 PK	88.2	-31.1	1.67 H	100	47.6	9.5
4	#12830.00	44.9 AV	68.2	-23.3	1.67 H	100	35.4	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.7 PK			1.14 V	140	75.1	44.6
2	*6415.00	108.8 AV			1.14 V	140	64.2	44.6
3	#12830.00	57.7 PK	88.2	-30.5	1.65 V	199	48.2	9.5
4	#12830.00	45.4 AV	68.2	-22.8	1.65 V	199	35.9	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.1 PK			2.58 H	304	73.2	44.9
2	*6535.00	107.2 AV			2.58 H	304	62.3	44.9
3	#13070.00	57.2 PK	88.2	-31.0	1.90 H	324	48.2	9.0
4	#13070.00	45.1 AV	68.2	-23.1	1.90 H	324	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.3 PK			1.15 V	140	70.4	44.9
2	*6535.00	104.6 AV			1.15 V	140	59.7	44.9
3	#13070.00	57.8 PK	88.2	-30.4	1.59 V	260	48.8	9.0
4	#13070.00	45.6 AV	68.2	-22.6	1.59 V	260	36.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.4 PK			2.58 H	303	73.4	45.0
2	*6695.00	106.9 AV			2.58 H	303	61.9	45.0
3	13390.00	58.1 PK	74.0	-15.9	1.64 H	252	48.5	9.6
4	13390.00	45.8 AV	54.0	-8.2	1.64 H	252	36.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.3 PK			1.14 V	142	70.3	45.0
2	*6695.00	103.8 AV			1.14 V	142	58.8	45.0
3	13390.00	58.3 PK	74.0	-15.7	1.32 V	309	48.7	9.6
4	13390.00	46.0 AV	54.0	-8.0	1.32 V	309	36.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.3 PK			2.59 H	306	73.0	45.3
2	*6855.00	107.4 AV			2.59 H	306	62.1	45.3
3	#13710.00	57.2 PK	88.2	-31.0	1.99 H	198	48.2	9.0
4	#13710.00	45.6 AV	68.2	-22.6	1.99 H	198	36.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.4 PK			1.15 V	141	70.1	45.3
2	*6855.00	104.1 AV			1.15 V	141	58.8	45.3
3	#13710.00	58.0 PK	88.2	-30.2	1.59 V	290	49.0	9.0
4	#13710.00	46.1 AV	68.2	-22.1	1.59 V	290	37.1	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

106-tone RU

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.3 PK	88.2	-4.9	2.74 H	311	78.9	4.4
2	#5925.00	51.7 AV	68.2	-16.5	2.74 H	311	47.3	4.4
3	*5955.00	118.6 PK			2.74 H	311	76.4	42.2
4	*5955.00	105.4 AV			2.74 H	311	63.2	42.2
5	11910.00	57.0 PK	74.0	-17.0	1.78 H	259	48.4	8.6
6	11910.00	44.9 AV	54.0	-9.1	1.78 H	259	36.3	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.1 PK	88.2	-5.1	1.10 V	138	78.7	4.4
2	#5925.00	52.0 AV	68.2	-16.2	1.10 V	138	47.6	4.4
3	*5955.00	121.9 PK			1.10 V	138	79.7	42.2
4	*5955.00	108.7 AV			1.10 V	138	66.5	42.2
5	11910.00	57.5 PK	74.0	-16.5	1.36 V	309	48.9	8.6
6	11910.00	45.1 AV	54.0	-8.9	1.36 V	309	36.5	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.3 PK			2.78 H	314	75.1	43.2
2	*6195.00	105.6 AV			2.78 H	314	62.4	43.2
3	12390.00	57.4 PK	74.0	-16.6	1.76 H	253	48.5	8.9
4	12390.00	45.3 AV	54.0	-8.7	1.76 H	253	36.4	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.5 PK			1.07 V	144	78.3	43.2
2	*6195.00	108.7 AV			1.07 V	144	65.5	43.2
3	12390.00	57.8 PK	74.0	-16.2	1.38 V	316	48.9	8.9
4	12390.00	45.7 AV	54.0	-8.3	1.38 V	316	36.8	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.5 PK			2.74 H	310	73.9	44.6
2	*6415.00	106.1 AV			2.74 H	310	61.5	44.6
3	#12830.00	57.1 PK	88.2	-31.1	1.57 H	164	47.6	9.5
4	#12830.00	45.2 AV	68.2	-23.0	1.57 H	164	35.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.2 PK			1.10 V	139	76.6	44.6
2	*6415.00	109.7 AV			1.10 V	139	65.1	44.6
3	#12830.00	57.8 PK	88.2	-30.4	1.65 V	2	48.3	9.5
4	#12830.00	45.6 AV	68.2	-22.6	1.65 V	2	36.1	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.3 PK			2.60 H	304	74.4	44.9
2	*6535.00	107.7 AV			2.60 H	304	62.8	44.9
3	#13070.00	58.1 PK	88.2	-30.1	1.59 H	297	49.1	9.0
4	#13070.00	45.9 AV	68.2	-22.3	1.59 H	297	36.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.0 PK			1.11 V	144	71.1	44.9
2	*6535.00	104.0 AV			1.11 V	144	59.1	44.9
3	#13070.00	57.7 PK	88.2	-30.5	1.54 V	108	48.7	9.0
4	#13070.00	45.8 AV	68.2	-22.4	1.54 V	108	36.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.4 PK			2.59 H	304	74.4	45.0
2	*6695.00	107.5 AV			2.59 H	304	62.5	45.0
3	13390.00	58.0 PK	74.0	-16.0	1.76 H	257	48.4	9.6
4	13390.00	45.7 AV	54.0	-8.3	1.76 H	257	36.1	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.1 PK			1.11 V	143	71.1	45.0
2	*6695.00	104.2 AV			1.11 V	143	59.2	45.0
3	13390.00	58.3 PK	74.0	-15.7	1.39 V	308	48.7	9.6
4	13390.00	46.1 AV	54.0	-7.9	1.39 V	308	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.9 PK			2.86 H	293	74.6	45.3
2	*6855.00	108.2 AV			2.86 H	293	62.9	45.3
3	#13710.00	57.3 PK	88.2	-30.9	1.66 H	254	48.3	9.0
4	#13710.00	45.1 AV	68.2	-23.1	1.66 H	254	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.7 PK			1.09 V	147	71.4	45.3
2	*6855.00	105.0 AV			1.09 V	147	59.7	45.3
3	#13710.00	57.6 PK	88.2	-30.6	1.31 V	317	48.6	9.0
4	#13710.00	45.5 AV	68.2	-22.7	1.31 V	317	36.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B

under control of standard power AP

2TX

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.1 PK	88.2	-17.1	2.81 H	282	66.7	4.4
2	#5925.00	49.2 AV	68.2	-19.0	2.81 H	282	44.8	4.4
3	*5955.00	112.3 PK			2.81 H	282	70.1	42.2
4	*5955.00	102.8 AV			2.81 H	282	60.6	42.2
5	11910.00	57.1 PK	74.0	-16.9	2.23 H	307	48.5	8.6
6	11910.00	44.3 AV	54.0	-9.7	2.23 H	307	35.7	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.6 PK	88.2	-20.6	1.17 V	135	63.2	4.4
2	#5925.00	49.2 AV	68.2	-19.0	1.17 V	135	44.8	4.4
3	*5955.00	117.1 PK			1.17 V	135	74.9	42.2
4	*5955.00	107.9 AV			1.17 V	135	65.7	42.2
5	11910.00	57.7 PK	74.0	-16.3	1.59 V	239	49.1	8.6
6	11910.00	45.0 AV	54.0	-9.0	1.59 V	239	36.4	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	112.2 PK			2.81 H	282	69.0	43.2
2	*6195.00	102.4 AV			2.81 H	282	59.2	43.2
3	12390.00	57.3 PK	74.0	-16.7	1.00 H	210	48.4	8.9
4	12390.00	45.0 AV	54.0	-9.0	1.00 H	210	36.1	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.0 PK			1.18 V	135	73.8	43.2
2	*6195.00	107.4 AV			1.18 V	135	64.2	43.2
3	12390.00	57.6 PK	74.0	-16.4	1.25 V	157	48.7	8.9
4	12390.00	45.4 AV	54.0	-8.6	1.25 V	157	36.5	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.9 PK			3.05 H	292	69.3	44.6
2	*6415.00	104.2 AV			3.05 H	292	59.6	44.6
3	#12830.00	57.9 PK	88.2	-30.3	2.23 H	302	48.4	9.5
4	#12830.00	45.0 AV	68.2	-23.2	2.23 H	302	35.5	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.7 PK			1.13 V	138	72.1	44.6
2	*6415.00	108.5 AV			1.13 V	138	63.9	44.6
3	#12830.00	58.4 PK	88.2	-29.8	1.62 V	237	48.9	9.5
4	#12830.00	45.8 AV	68.2	-22.4	1.62 V	237	36.3	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.5 PK			2.60 H	295	72.6	44.9
2	*6535.00	107.8 AV			2.60 H	295	62.9	44.9
3	#13070.00	58.1 PK	88.2	-30.1	1.55 H	345	49.1	9.0
4	#13070.00	45.7 AV	68.2	-22.5	1.55 H	345	36.7	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.4 PK			1.02 V	150	69.5	44.9
2	*6535.00	104.3 AV			1.02 V	150	59.4	44.9
3	#13070.00	57.5 PK	88.2	-30.7	1.85 V	29	48.5	9.0
4	#13070.00	44.7 AV	68.2	-23.5	1.85 V	29	35.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.6 PK			2.60 H	296	72.6	45.0
2	*6695.00	107.6 AV			2.60 H	296	62.6	45.0
3	13390.00	58.0 PK	74.0	-16.0	2.16 H	308	48.4	9.6
4	13390.00	45.3 AV	54.0	-8.7	2.16 H	308	35.7	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.2 PK			1.02 V	150	69.2	45.0
2	*6695.00	104.6 AV			1.02 V	150	59.6	45.0
3	13390.00	58.6 PK	74.0	-15.4	1.62 V	235	49.0	9.6
4	13390.00	46.0 AV	54.0	-8.0	1.62 V	235	36.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.4 PK			2.60 H	295	72.1	45.3
2	*6855.00	107.8 AV			2.60 H	295	62.5	45.3
3	#13710.00	57.8 PK	88.2	-30.4	1.65 H	291	48.8	9.0
4	#13710.00	45.8 AV	68.2	-22.4	1.65 H	291	36.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.1 PK			1.02 V	150	68.8	45.3
2	*6855.00	104.3 AV			1.02 V	150	59.0	45.3
3	#13710.00	57.6 PK	88.2	-30.6	1.57 V	190	48.6	9.0
4	#13710.00	45.1 AV	68.2	-23.1	1.57 V	190	36.1	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.8 PK	88.2	-14.4	2.81 H	281	69.4	4.4
2	#5925.00	55.1 AV	68.2	-13.1	2.81 H	281	50.7	4.4
3	*5955.00	116.5 PK			2.81 H	281	74.3	42.2
4	*5955.00	104.5 AV			2.81 H	281	62.3	42.2
5	11910.00	57.2 PK	74.0	-16.8	2.32 H	312	48.6	8.6
6	11910.00	44.4 AV	54.0	-9.6	2.32 H	312	35.8	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.9 PK	88.2	-12.3	1.06 V	170	71.5	4.4
2	#5925.00	59.7 AV	68.2	-8.5	1.06 V	170	55.3	4.4
3	*5955.00	121.0 PK			1.06 V	170	78.8	42.2
4	*5955.00	108.5 AV			1.06 V	170	66.3	42.2
5	11910.00	57.9 PK	74.0	-16.1	1.54 V	241	49.3	8.6
6	11910.00	45.3 AV	54.0	-8.7	1.54 V	241	36.7	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.9 PK			2.86 H	296	73.7	43.2
2	*6195.00	105.1 AV			2.86 H	296	61.9	43.2
3	12390.00	57.4 PK	74.0	-16.6	2.23 H	307	48.5	8.9
4	12390.00	44.5 AV	54.0	-9.5	2.23 H	307	35.6	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.8 PK			1.13 V	144	77.6	43.2
2	*6195.00	108.5 AV			1.13 V	144	65.3	43.2
3	12390.00	58.1 PK	74.0	-15.9	1.54 V	232	49.2	8.9
4	12390.00	45.5 AV	54.0	-8.5	1.54 V	232	36.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.8 PK			2.86 H	296	72.2	44.6
2	*6415.00	105.4 AV			2.86 H	296	60.8	44.6
3	#12830.00	57.1 PK	88.2	-31.1	1.05 H	165	47.6	9.5
4	#12830.00	44.2 AV	68.2	-24.0	1.05 H	165	34.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.5 PK			1.13 V	142	75.9	44.6
2	*6415.00	109.7 AV			1.13 V	142	65.1	44.6
3	#12830.00	57.3 PK	88.2	-30.9	1.68 V	222	47.8	9.5
4	#12830.00	44.5 AV	68.2	-23.7	1.68 V	222	35.0	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.8 PK			2.87 H	288	75.9	44.9
2	*6535.00	109.3 AV			2.87 H	288	64.4	44.9
3	#13070.00	57.7 PK	88.2	-30.5	2.26 H	318	48.7	9.0
4	#13070.00	44.9 AV	68.2	-23.3	2.26 H	318	35.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.6 PK			1.00 V	146	73.7	44.9
2	*6535.00	107.1 AV			1.00 V	146	62.2	44.9
3	#13070.00	58.3 PK	88.2	-29.9	1.61 V	245	49.3	9.0
4	#13070.00	45.8 AV	68.2	-22.4	1.61 V	245	36.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.4 PK			2.81 H	286	76.4	45.0
2	*6695.00	109.1 AV			2.81 H	286	64.1	45.0
3	13390.00	58.3 PK	74.0	-15.7	2.27 H	309	48.7	9.6
4	13390.00	45.3 AV	54.0	-8.7	2.27 H	309	35.7	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.4 PK			1.01 V	149	73.4	45.0
2	*6695.00	106.9 AV			1.01 V	149	61.9	45.0
3	13390.00	58.8 PK	74.0	-15.2	1.53 V	236	49.2	9.6
4	13390.00	46.2 AV	54.0	-7.8	1.53 V	236	36.6	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.4 PK			2.81 H	285	75.1	45.3
2	*6855.00	109.7 AV			2.81 H	285	64.4	45.3
3	#13710.00	58.2 PK	88.2	-30.0	1.17 H	278	49.2	9.0
4	#13710.00	45.6 AV	68.2	-22.6	1.17 H	278	36.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.8 PK			1.01 V	145	72.5	45.3
2	*6855.00	106.5 AV			1.01 V	145	61.2	45.3
3	#13710.00	57.7 PK	88.2	-30.5	1.64 V	290	48.7	9.0
4	#13710.00	45.6 AV	68.2	-22.6	1.64 V	290	36.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.4 PK	88.2	-7.8	2.38 H	228	76.0	4.4
2	#5925.00	61.6 AV	68.2	-6.6	2.38 H	228	57.2	4.4
3	*5965.00	111.1 PK			2.38 H	228	68.9	42.2
4	*5965.00	98.7 AV			2.38 H	228	56.5	42.2
5	11930.00	57.1 PK	74.0	-16.9	1.32 H	237	48.5	8.6
6	11930.00	44.5 AV	54.0	-9.5	1.32 H	237	35.9	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.5 PK	88.2	-9.7	1.16 V	107	74.1	4.4
2	#5925.00	59.0 AV	68.2	-9.2	1.16 V	107	54.6	4.4
3	*5965.00	108.6 PK			1.16 V	107	66.4	42.2
4	*5965.00	96.3 AV			1.16 V	107	54.1	42.2
5	11930.00	56.8 PK	74.0	-17.2	2.25 V	74	48.2	8.6
6	11930.00	44.0 AV	54.0	-10.0	2.25 V	74	35.4	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.9 PK			2.42 H	216	71.6	43.3
2	*6205.00	102.4 AV			2.42 H	216	59.1	43.3
3	12410.00	57.4 PK	74.0	-16.6	2.10 H	112	48.6	8.8
4	12410.00	44.6 AV	54.0	-9.4	2.10 H	112	35.8	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	112.4 PK			1.16 V	101	69.1	43.3
2	*6205.00	100.1 AV			1.16 V	101	56.8	43.3
3	12410.00	57.1 PK	74.0	-16.9	2.48 V	104	48.3	8.8
4	12410.00	44.4 AV	54.0	-9.6	2.48 V	104	35.6	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.4 PK			3.07 H	294	69.9	44.5
2	*6405.00	102.6 AV			3.07 H	294	58.1	44.5
3	#12810.00	58.0 PK	88.2	-30.2	2.28 H	312	48.4	9.6
4	#12810.00	45.1 AV	68.2	-23.1	2.28 H	312	35.5	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	118.6 PK			1.04 V	143	74.1	44.5
2	*6405.00	106.8 AV			1.04 V	143	62.3	44.5
3	#12810.00	58.7 PK	88.2	-29.5	1.57 V	236	49.1	9.6
4	#12810.00	46.0 AV	68.2	-22.2	1.57 V	236	36.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	119.3 PK			2.85 H	287	74.4	44.9
2	*6565.00	106.9 AV			2.85 H	287	62.0	44.9
3	#13130.00	57.4 PK	88.2	-30.8	2.19 H	301	48.4	9.0
4	#13130.00	44.6 AV	68.2	-23.6	2.19 H	301	35.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	117.3 PK			1.09 V	147	72.4	44.9
2	*6565.00	104.8 AV			1.09 V	147	59.9	44.9
3	#13130.00	57.9 PK	88.2	-30.3	1.59 V	241	48.9	9.0
4	#13130.00	45.6 AV	68.2	-22.6	1.59 V	241	36.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	119.1 PK			2.85 H	276	74.1	45.0
2	*6685.00	106.8 AV			2.85 H	276	61.8	45.0
3	13370.00	58.0 PK	74.0	-16.0	1.61 H	158	48.5	9.5
4	13370.00	45.2 AV	54.0	-8.8	1.61 H	158	35.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	116.9 PK			1.05 V	152	71.9	45.0
2	*6685.00	104.5 AV			1.05 V	152	59.5	45.0
3	13370.00	58.1 PK	74.0	-15.9	2.51 V	104	48.6	9.5
4	13370.00	45.3 AV	54.0	-8.7	2.51 V	104	35.8	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	117.6 PK			2.88 H	284	72.3	45.3
2	*6845.00	105.9 AV			2.88 H	284	60.6	45.3
3	#13690.00	57.3 PK	88.2	-30.9	2.24 H	309	48.2	9.1
4	#13690.00	44.3 AV	68.2	-23.9	2.24 H	309	35.2	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.9 PK			1.14 V	68	69.6	45.3
2	*6845.00	103.2 AV			1.14 V	68	57.9	45.3
3	#13690.00	57.8 PK	88.2	-30.4	1.55 V	244	48.7	9.1
4	#13690.00	45.4 AV	68.2	-22.8	1.55 V	244	36.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.9 PK	88.2	-14.3	2.37 H	228	69.5	4.4
2	#5925.00	50.7 AV	68.2	-17.5	2.37 H	228	46.3	4.4
3	*5985.00	108.0 PK			2.37 H	228	65.8	42.2
4	*5985.00	94.2 AV			2.37 H	228	52.0	42.2
5	11970.00	57.2 PK	74.0	-16.8	1.56 H	75	48.6	8.6
6	11970.00	44.4 AV	54.0	-9.6	1.56 H	75	35.8	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.0 PK	88.2	-17.2	1.16 V	107	66.6	4.4
2	#5925.00	49.4 AV	68.2	-18.8	1.16 V	107	45.0	4.4
3	*5985.00	105.2 PK			1.16 V	107	63.0	42.2
4	*5985.00	92.3 AV			1.16 V	107	50.1	42.2
5	11970.00	56.4 PK	74.0	-17.6	2.54 V	118	47.8	8.6
6	11970.00	41.7 AV	54.0	-12.3	2.54 V	118	33.1	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	111.2 PK			2.32 H	317	67.8	43.4
2	*6225.00	99.5 AV			2.32 H	317	56.1	43.4
3	12450.00	57.0 PK	74.0	-17.0	2.27 H	304	48.4	8.6
4	12450.00	44.1 AV	54.0	-9.9	2.27 H	304	35.5	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	116.2 PK			1.13 V	141	72.8	43.4
2	*6225.00	103.6 AV			1.13 V	141	60.2	43.4
3	12450.00	57.5 PK	74.0	-16.5	1.62 V	248	48.9	8.6
4	12450.00	45.0 AV	54.0	-9.0	1.62 V	248	36.4	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.6 PK			2.33 H	312	68.2	44.4
2	*6385.00	100.4 AV			2.33 H	312	56.0	44.4
3	#12770.00	57.9 PK	88.2	-30.3	2.17 H	303	48.3	9.6
4	#12770.00	44.8 AV	68.2	-23.4	2.17 H	303	35.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	116.5 PK			1.00 V	140	72.1	44.4
2	*6385.00	104.5 AV			1.00 V	140	60.1	44.4
3	#12770.00	58.2 PK	88.2	-30.0	1.57 V	235	48.6	9.6
4	#12770.00	45.8 AV	68.2	-22.4	1.57 V	235	36.2	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	115.2 PK			2.96 H	284	70.3	44.9
2	*6625.00	103.4 AV			2.96 H	284	58.5	44.9
3	13250.00	58.2 PK	74.0	-15.8	2.33 H	194	49.1	9.1
4	13250.00	45.4 AV	54.0	-8.6	2.33 H	194	36.3	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.8 PK			1.32 V	135	67.9	44.9
2	*6625.00	101.2 AV			1.32 V	135	56.3	44.9
3	13250.00	57.0 PK	74.0	-17.0	1.22 V	253	47.9	9.1
4	13250.00	44.3 AV	54.0	-9.7	1.22 V	253	35.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	115.1 PK			2.97 H	288	70.1	45.0
2	*6705.00	103.4 AV			2.97 H	288	58.4	45.0
3	#13410.00	57.8 PK	88.2	-30.4	2.17 H	308	48.1	9.7
4	#13410.00	44.9 AV	68.2	-23.3	2.17 H	308	35.2	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.7 PK			1.02 V	146	67.7	45.0
2	*6705.00	101.1 AV			1.02 V	146	56.1	45.0
3	#13410.00	58.0 PK	88.2	-30.2	1.57 V	240	48.3	9.7
4	#13410.00	45.0 AV	68.2	-23.2	1.57 V	240	35.3	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	115.2 PK			2.77 H	285	70.2	45.0
2	*6785.00	102.6 AV			2.77 H	285	57.6	45.0
3	#13570.00	57.6 PK	88.2	-30.6	2.22 H	308	48.6	9.0
4	#13570.00	45.3 AV	68.2	-22.9	2.22 H	308	36.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.7 PK			1.03 V	146	67.7	45.0
2	*6785.00	100.3 AV			1.03 V	146	55.3	45.0
3	#13570.00	57.6 PK	88.2	-30.6	1.56 V	234	48.6	9.0
4	#13570.00	45.4 AV	68.2	-22.8	1.56 V	234	36.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5890.00	86.1 PK	88.2	-2.1	2.31 H	311	81.8	4.3
2	#5890.00	59.9 AV	68.2	-8.3	2.31 H	311	55.6	4.3
3	*6025.00	104.3 PK			2.31 H	311	62.0	42.3
4	*6025.00	91.7 AV			2.31 H	311	49.4	42.3
5	12050.00	56.7 PK	74.0	-17.3	2.27 H	312	48.1	8.6
6	12050.00	43.9 AV	54.0	-10.1	2.27 H	312	35.3	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5890.00	87.9 PK	88.2	-0.3	1.07 V	152	83.6	4.3
2	#5890.00	64.9 AV	68.2	-3.3	1.07 V	152	60.6	4.3
3	*6025.00	108.1 PK			1.07 V	152	65.8	42.3
4	*6025.00	95.5 AV			1.07 V	152	53.2	42.3
5	12050.00	57.0 PK	74.0	-17.0	1.54 V	237	48.4	8.6
6	12050.00	44.7 AV	54.0	-9.3	1.54 V	237	36.1	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.4 PK			2.32 H	304	62.2	43.2
2	*6185.00	92.8 AV			2.32 H	304	49.6	43.2
3	12370.00	56.4 PK	74.0	-17.6	2.12 H	68	47.6	8.8
4	12370.00	43.7 AV	54.0	-10.3	2.12 H	68	34.9	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.2 PK			1.07 V	154	66.0	43.2
2	*6185.00	96.7 AV			1.07 V	154	53.5	43.2
3	12370.00	57.0 PK	74.0	-17.0	2.51 V	149	48.2	8.8
4	12370.00	44.2 AV	54.0	-9.8	2.51 V	149	35.4	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.2 PK			2.26 H	310	61.0	44.2
2	*6345.00	92.5 AV			2.26 H	310	48.3	44.2
3	12690.00	57.5 PK	74.0	-16.5	1.51 H	284	47.9	9.6
4	12690.00	44.8 AV	54.0	-9.2	1.51 H	284	35.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	108.8 PK			1.12 V	168	64.6	44.2
2	*6345.00	96.3 AV			1.12 V	168	52.1	44.2
3	12690.00	58.1 PK	74.0	-15.9	2.61 V	122	48.5	9.6
4	12690.00	45.3 AV	54.0	-8.7	2.61 V	122	35.7	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	21 °C, 69 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.3 PK			2.77 H	287	62.3	45.0
2	*6665.00	95.6 AV			2.77 H	287	50.6	45.0
3	13330.00	56.9 PK	74.0	-17.1	2.17 H	312	47.7	9.2
4	13330.00	44.5 AV	54.0	-9.5	2.17 H	312	35.3	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.3 PK			1.06 V	110	60.3	45.0
2	*6665.00	93.5 AV			1.06 V	110	48.5	45.0
3	13330.00	57.6 PK	74.0	-16.4	1.57 V	245	48.4	9.2
4	13330.00	45.2 AV	54.0	-8.8	1.57 V	245	36.0	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Partial RU_2TX

26-tone RU

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.6 PK	88.2	-28.6	2.38 H	228	55.2	4.4
2	#5925.00	46.7 AV	68.2	-21.5	2.38 H	228	42.3	4.4
3	*5955.00	115.8 PK			2.38 H	228	73.6	42.2
4	*5955.00	103.4 AV			2.38 H	228	61.2	42.2
5	11910.00	57.2 PK	74.0	-16.8	2.51 H	183	48.6	8.6
6	11910.00	44.4 AV	54.0	-9.6	2.51 H	183	35.8	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.5 PK	88.2	-27.7	2.14 V	195	56.1	4.4
2	#5925.00	46.9 AV	68.2	-21.3	2.14 V	195	42.5	4.4
3	*5955.00	120.2 PK			2.14 V	195	78.0	42.2
4	*5955.00	106.8 AV			2.14 V	195	64.6	42.2
5	11910.00	57.3 PK	74.0	-16.7	2.21 V	157	48.7	8.6
6	11910.00	44.5 AV	54.0	-9.5	2.21 V	157	35.9	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.4 PK			2.87 H	299	73.2	43.2
2	*6195.00	104.8 AV			2.87 H	299	61.6	43.2
3	12390.00	57.5 PK	74.0	-16.5	2.32 H	304	48.6	8.9
4	12390.00	44.6 AV	54.0	-9.4	2.32 H	304	35.7	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.5 PK			1.12 V	139	76.3	43.2
2	*6195.00	108.1 AV			1.12 V	139	64.9	43.2
3	12390.00	58.2 PK	74.0	-15.8	1.59 V	241	49.3	8.9
4	12390.00	45.6 AV	54.0	-8.4	1.59 V	241	36.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.1 PK			2.32 H	318	71.5	44.6
2	*6415.00	104.8 AV			2.32 H	318	60.2	44.6
3	#12830.00	57.9 PK	88.2	-30.3	2.37 H	307	48.4	9.5
4	#12830.00	45.3 AV	68.2	-22.9	2.37 H	307	35.8	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.1 PK			1.09 V	141	74.5	44.6
2	*6415.00	107.9 AV			1.09 V	141	63.3	44.6
3	#12830.00	58.4 PK	88.2	-29.8	1.62 V	238	48.9	9.5
4	#12830.00	46.2 AV	68.2	-22.0	1.62 V	238	36.7	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.5 PK			2.57 H	295	74.6	44.9
2	*6535.00	108.3 AV			2.57 H	295	63.4	44.9
3	#13070.00	57.5 PK	88.2	-30.7	1.96 H	288	48.5	9.0
4	#13070.00	44.8 AV	68.2	-23.4	1.96 H	288	35.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.0 PK			1.10 V	142	72.1	44.9
2	*6535.00	105.8 AV			1.10 V	142	60.9	44.9
3	#13070.00	57.3 PK	88.2	-30.9	1.74 V	169	48.3	9.0
4	#13070.00	44.6 AV	68.2	-23.6	1.74 V	169	35.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.9 PK			2.57 H	295	74.9	45.0
2	*6695.00	108.8 AV			2.57 H	295	63.8	45.0
3	13390.00	58.0 PK	74.0	-16.0	2.33 H	301	48.4	9.6
4	13390.00	45.4 AV	54.0	-8.6	2.33 H	301	35.8	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.6 PK			1.07 V	142	72.6	45.0
2	*6695.00	106.4 AV			1.07 V	142	61.4	45.0
3	13390.00	58.4 PK	74.0	-15.6	1.62 V	253	48.8	9.6
4	13390.00	45.9 AV	54.0	-8.1	1.62 V	253	36.3	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.2 PK			2.50 H	291	75.9	45.3
2	*6855.00	109.5 AV			2.50 H	291	64.2	45.3
3	#13710.00	57.7 PK	88.2	-30.5	2.31 H	321	48.7	9.0
4	#13710.00	44.9 AV	68.2	-23.3	2.31 H	321	35.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.8 PK			1.11 V	147	73.5	45.3
2	*6855.00	107.1 AV			1.11 V	147	61.8	45.3
3	#13710.00	57.9 PK	88.2	-30.3	1.54 V	252	48.9	9.0
4	#13710.00	45.3 AV	68.2	-22.9	1.54 V	252	36.3	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

52-tone RU

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.4 PK	88.2	-26.8	2.38 H	228	57.0	4.4
2	#5925.00	46.8 AV	68.2	-21.4	2.38 H	228	42.4	4.4
3	*5955.00	116.1 PK			2.38 H	228	73.9	42.2
4	*5955.00	104.3 AV			2.38 H	228	62.1	42.2
5	11910.00	57.2 PK	74.0	-16.8	2.11 H	108	48.6	8.6
6	11910.00	44.4 AV	54.0	-9.6	2.11 H	108	35.8	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.6 PK	88.2	-3.6	2.14 V	195	80.2	4.4
2	#5925.00	51.5 AV	68.2	-16.7	2.14 V	195	47.1	4.4
3	*5955.00	120.8 PK			2.14 V	195	78.6	42.2
4	*5955.00	108.4 AV			2.14 V	195	66.2	42.2
5	11910.00	56.6 PK	74.0	-17.4	1.55 V	273	48.0	8.6
6	11910.00	43.9 AV	54.0	-10.1	1.55 V	273	35.3	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.8 PK			2.76 H	294	73.6	43.2
2	*6195.00	104.5 AV			2.76 H	294	61.3	43.2
3	12390.00	57.4 PK	74.0	-16.6	2.29 H	305	48.5	8.9
4	12390.00	44.6 AV	54.0	-9.4	2.29 H	305	35.7	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.1 PK			1.07 V	144	76.9	43.2
2	*6195.00	107.8 AV			1.07 V	144	64.6	43.2
3	12390.00	58.0 PK	74.0	-16.0	1.62 V	243	49.1	8.9
4	12390.00	45.5 AV	54.0	-8.5	1.62 V	243	36.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.2 PK			2.59 H	311	72.6	44.6
2	*6415.00	104.8 AV			2.59 H	311	60.2	44.6
3	#12830.00	58.0 PK	88.2	-30.2	2.39 H	324	48.5	9.5
4	#12830.00	45.2 AV	68.2	-23.0	2.39 H	324	35.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.8 PK			1.09 V	143	76.2	44.6
2	*6415.00	108.8 AV			1.09 V	143	64.2	44.6
3	#12830.00	58.6 PK	88.2	-29.6	1.57 V	254	49.1	9.5
4	#12830.00	45.9 AV	68.2	-22.3	1.57 V	254	36.4	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.8 PK			2.57 H	295	74.9	44.9
2	*6535.00	108.6 AV			2.57 H	295	63.7	44.9
3	#13070.00	57.1 PK	88.2	-31.1	1.96 H	288	48.1	9.0
4	#13070.00	44.3 AV	68.2	-23.9	1.96 H	288	35.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.2 PK			1.10 V	142	72.3	44.9
2	*6535.00	106.2 AV			1.10 V	142	61.3	44.9
3	#13070.00	57.5 PK	88.2	-30.7	1.74 V	169	48.5	9.0
4	#13070.00	44.8 AV	68.2	-23.4	1.74 V	169	35.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.1 PK			2.54 H	292	76.1	45.0
2	*6695.00	109.8 AV			2.54 H	292	64.8	45.0
3	13390.00	57.9 PK	74.0	-16.1	2.24 H	314	48.3	9.6
4	13390.00	45.3 AV	54.0	-8.7	2.24 H	314	35.7	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.9 PK			1.08 V	147	73.9	45.0
2	*6695.00	107.5 AV			1.08 V	147	62.5	45.0
3	13390.00	58.3 PK	74.0	-15.7	1.59 V	251	48.7	9.6
4	13390.00	45.9 AV	54.0	-8.1	1.59 V	251	36.3	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.9 PK			2.50 H	291	76.6	45.3
2	*6855.00	110.2 AV			2.50 H	291	64.9	45.3
3	#13710.00	57.5 PK	88.2	-30.7	2.31 H	321	48.5	9.0
4	#13710.00	44.7 AV	68.2	-23.5	2.31 H	321	35.7	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.4 PK			1.11 V	0	74.1	45.3
2	*6855.00	108.0 AV			1.11 V	0	62.7	45.3
3	#13710.00	57.9 PK	88.2	-30.3	1.54 V	252	48.9	9.0
4	#13710.00	45.2 AV	68.2	-23.0	1.54 V	252	36.2	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

106-tone RU

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.6 PK	88.2	-15.6	2.89 H	293	68.2	4.4
2	#5925.00	50.3 AV	68.2	-17.9	2.89 H	293	45.9	4.4
3	*5955.00	115.6 PK			2.89 H	293	73.4	42.2
4	*5955.00	104.3 AV			2.89 H	293	62.1	42.2
5	11910.00	57.3 PK	74.0	-16.7	2.37 H	312	48.7	8.6
6	11910.00	44.8 AV	54.0	-9.2	2.37 H	312	36.2	8.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.7 PK	88.2	-12.5	1.05 V	140	71.3	4.4
2	#5925.00	58.7 AV	68.2	-9.5	1.05 V	140	54.3	4.4
3	*5955.00	120.0 PK			1.05 V	140	77.8	42.2
4	*5955.00	108.6 AV			1.05 V	140	66.4	42.2
5	11910.00	57.9 PK	74.0	-16.1	1.51 V	253	49.3	8.6
6	11910.00	45.4 AV	54.0	-8.6	1.51 V	253	36.8	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.6 PK			2.76 H	294	73.4	43.2
2	*6195.00	104.3 AV			2.76 H	294	61.1	43.2
3	12390.00	57.1 PK	74.0	-16.9	2.29 H	305	48.2	8.9
4	12390.00	44.3 AV	54.0	-9.7	2.29 H	305	35.4	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.0 PK			1.07 V	144	76.8	43.2
2	*6195.00	107.6 AV			1.07 V	144	64.4	43.2
3	12390.00	57.7 PK	74.0	-16.3	1.62 V	243	48.8	8.9
4	12390.00	45.1 AV	54.0	-8.9	1.62 V	243	36.2	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.5 PK			2.59 H	311	72.9	44.6
2	*6415.00	105.2 AV			2.59 H	311	60.6	44.6
3	#12830.00	57.9 PK	88.2	-30.3	2.39 H	324	48.4	9.5
4	#12830.00	45.2 AV	68.2	-23.0	2.39 H	324	35.7	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.5 PK			1.09 V	143	75.9	44.6
2	*6415.00	108.4 AV			1.09 V	143	63.8	44.6
3	#12830.00	58.3 PK	88.2	-29.9	1.57 V	254	48.8	9.5
4	#12830.00	46.1 AV	68.2	-22.1	1.57 V	254	36.6	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.1 PK			2.57 H	295	75.2	44.9
2	*6535.00	108.9 AV			2.57 H	295	64.0	44.9
3	#13070.00	57.7 PK	88.2	-30.5	1.96 H	288	48.7	9.0
4	#13070.00	45.1 AV	68.2	-23.1	1.96 H	288	36.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.6 PK			1.10 V	142	72.7	44.9
2	*6535.00	106.6 AV			1.10 V	142	61.7	44.9
3	#13070.00	58.0 PK	88.2	-30.2	1.74 V	169	49.0	9.0
4	#13070.00	45.2 AV	68.2	-23.0	1.74 V	169	36.2	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.8 PK			2.55 H	306	76.8	45.0
2	*6695.00	109.6 AV			2.55 H	306	64.6	45.0
3	13390.00	57.9 PK	74.0	-16.1	2.36 H	315	48.3	9.6
4	13390.00	45.2 AV	54.0	-8.8	2.36 H	315	35.6	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.6 PK			1.04 V	145	74.6	45.0
2	*6695.00	107.3 AV			1.04 V	145	62.3	45.0
3	13390.00	58.2 PK	74.0	-15.8	1.67 V	254	48.6	9.6
4	13390.00	45.8 AV	54.0	-8.2	1.67 V	254	36.2	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.4 PK			2.50 H	291	76.1	45.3
2	*6855.00	109.8 AV			2.50 H	291	64.5	45.3
3	#13710.00	57.4 PK	88.2	-30.8	2.31 H	321	48.4	9.0
4	#13710.00	44.7 AV	68.2	-23.5	2.31 H	321	35.7	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.1 PK			1.11 V	147	73.8	45.3
2	*6855.00	107.5 AV			1.11 V	147	62.2	45.3
3	#13710.00	57.5 PK	88.2	-30.7	1.54 V	252	48.5	9.0
4	#13710.00	45.1 AV	68.2	-23.1	1.54 V	252	36.1	9.0


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge
standard power AP
Mode B
1TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

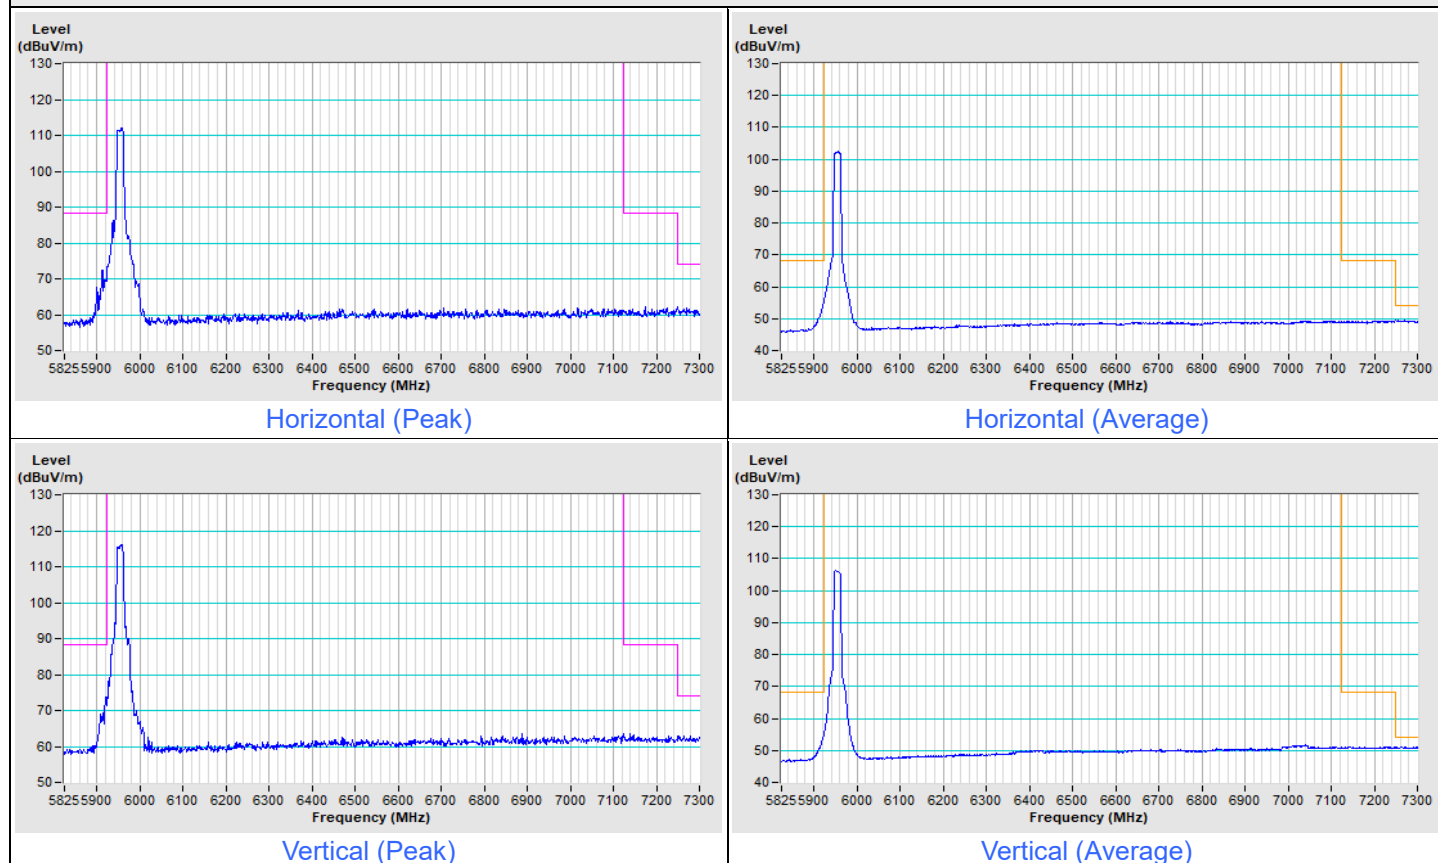


802.11be (EHT20) Channel 1

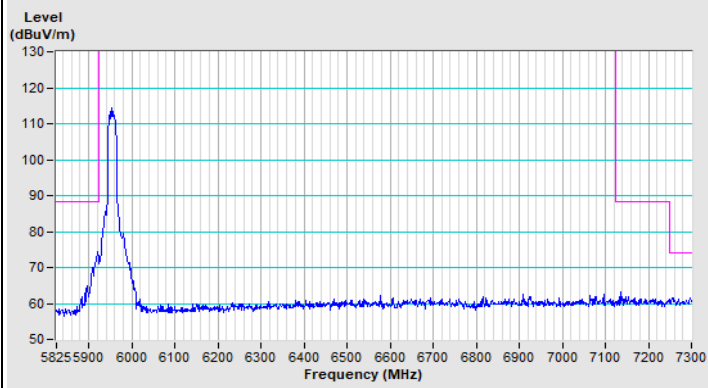


Horizontal (Peak)

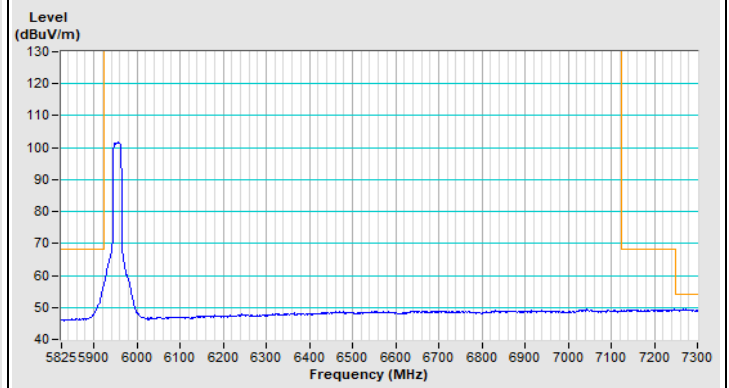

Horizontal (Average)




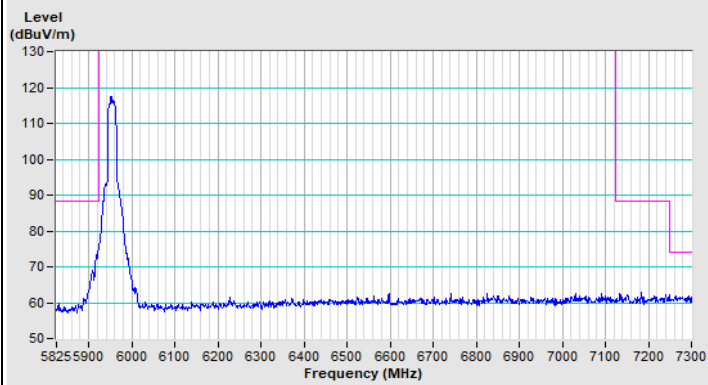


Vertical (Peak)

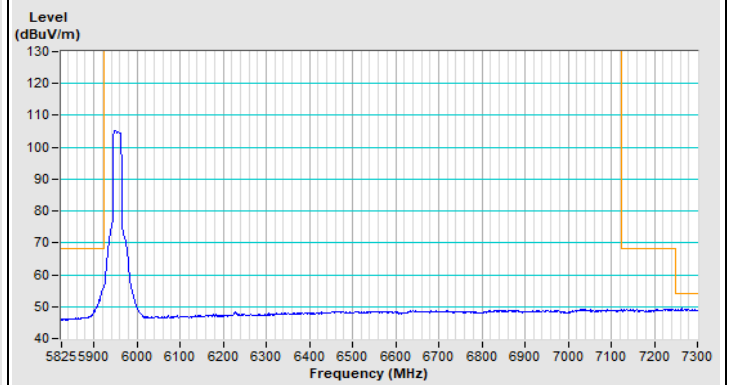


Vertical (Average)

802.11be (EHT40) Channel 3

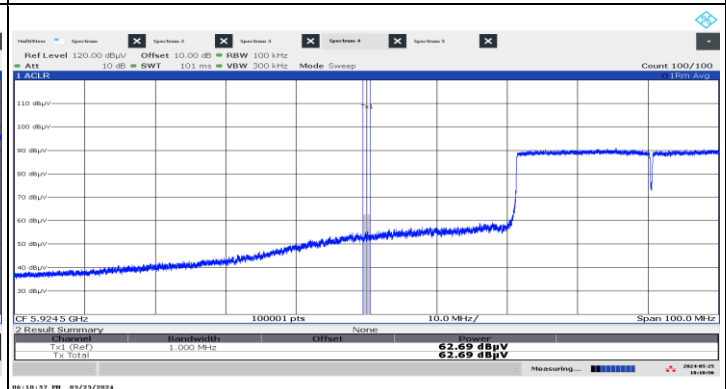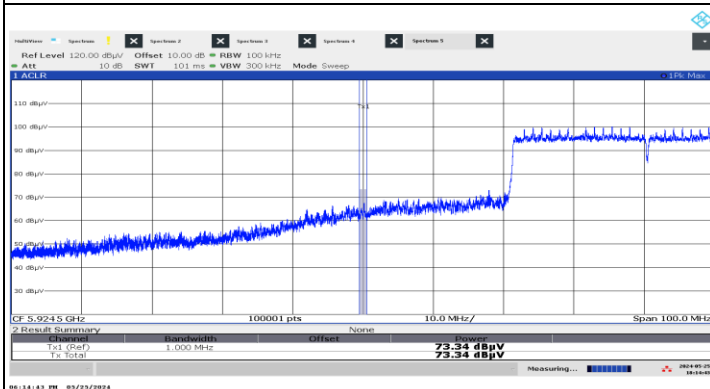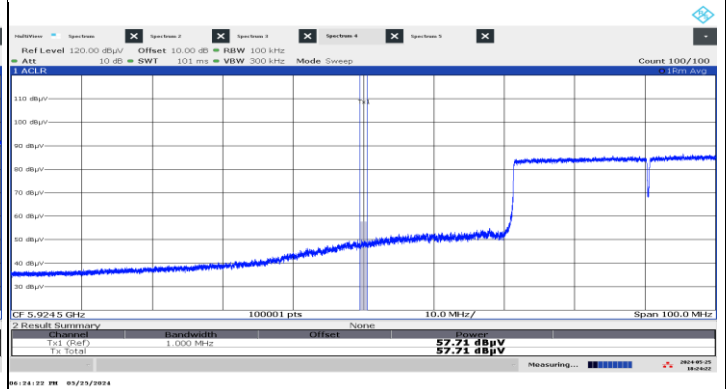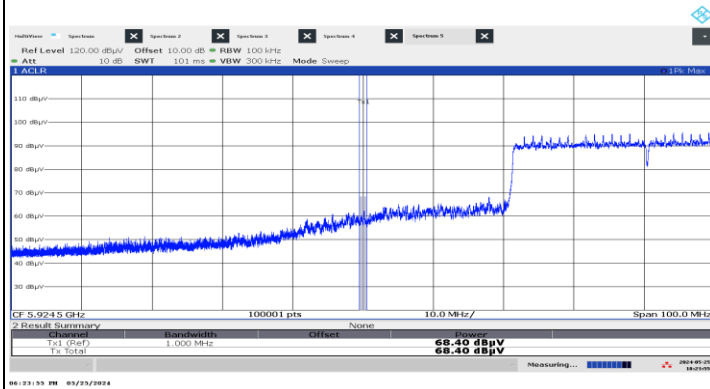


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

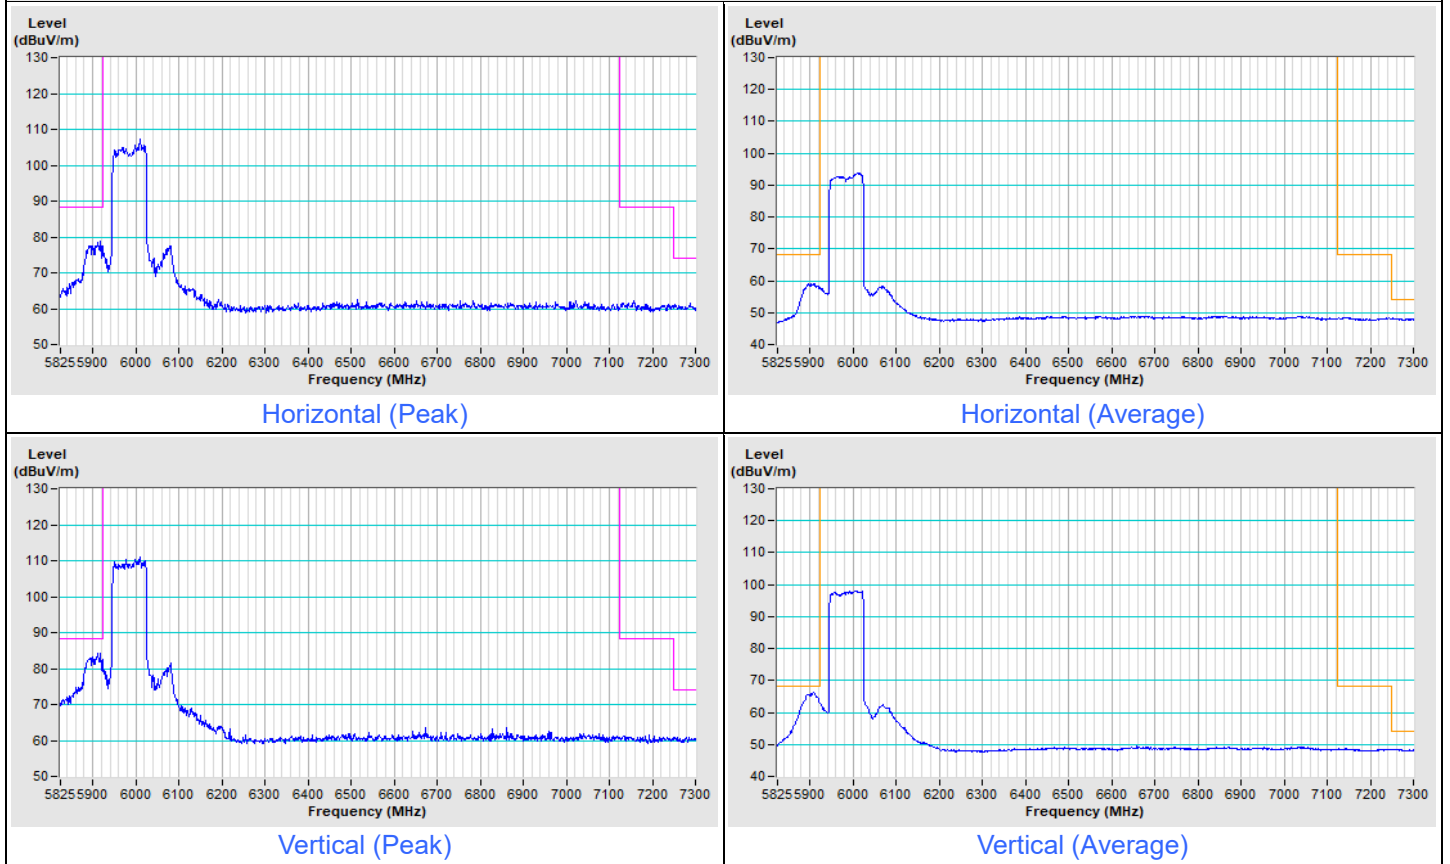


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

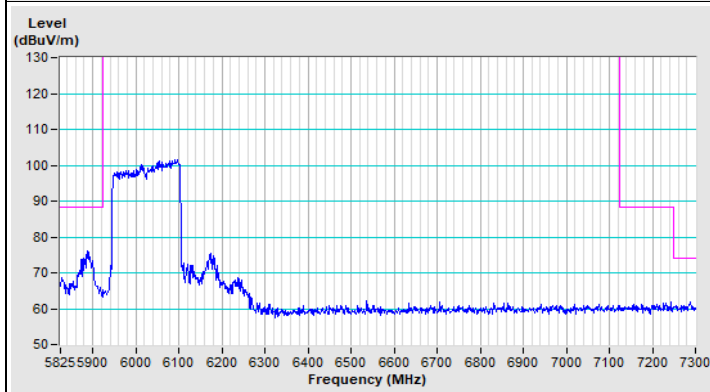


Horizontal (Peak)

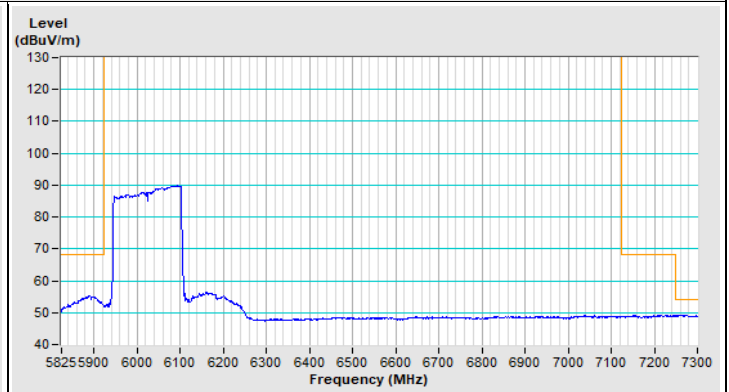

Horizontal (Average)

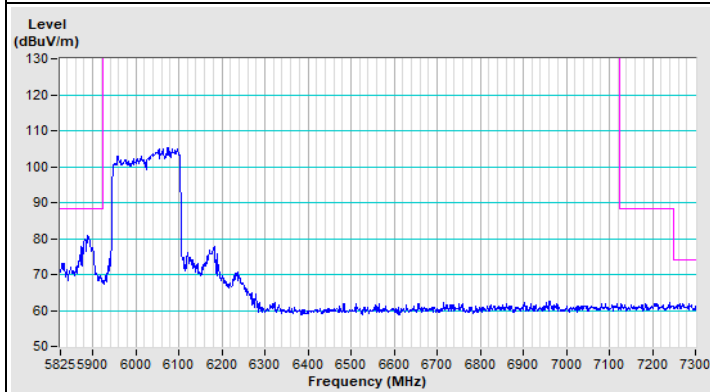

Vertical (Peak)

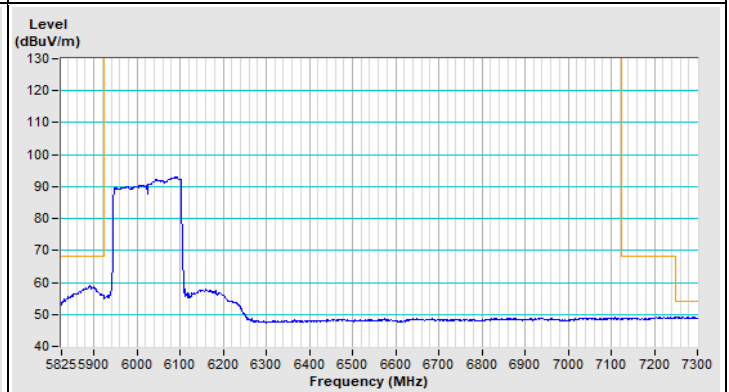


Vertical (Average)

Plot of Band Edge


2TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

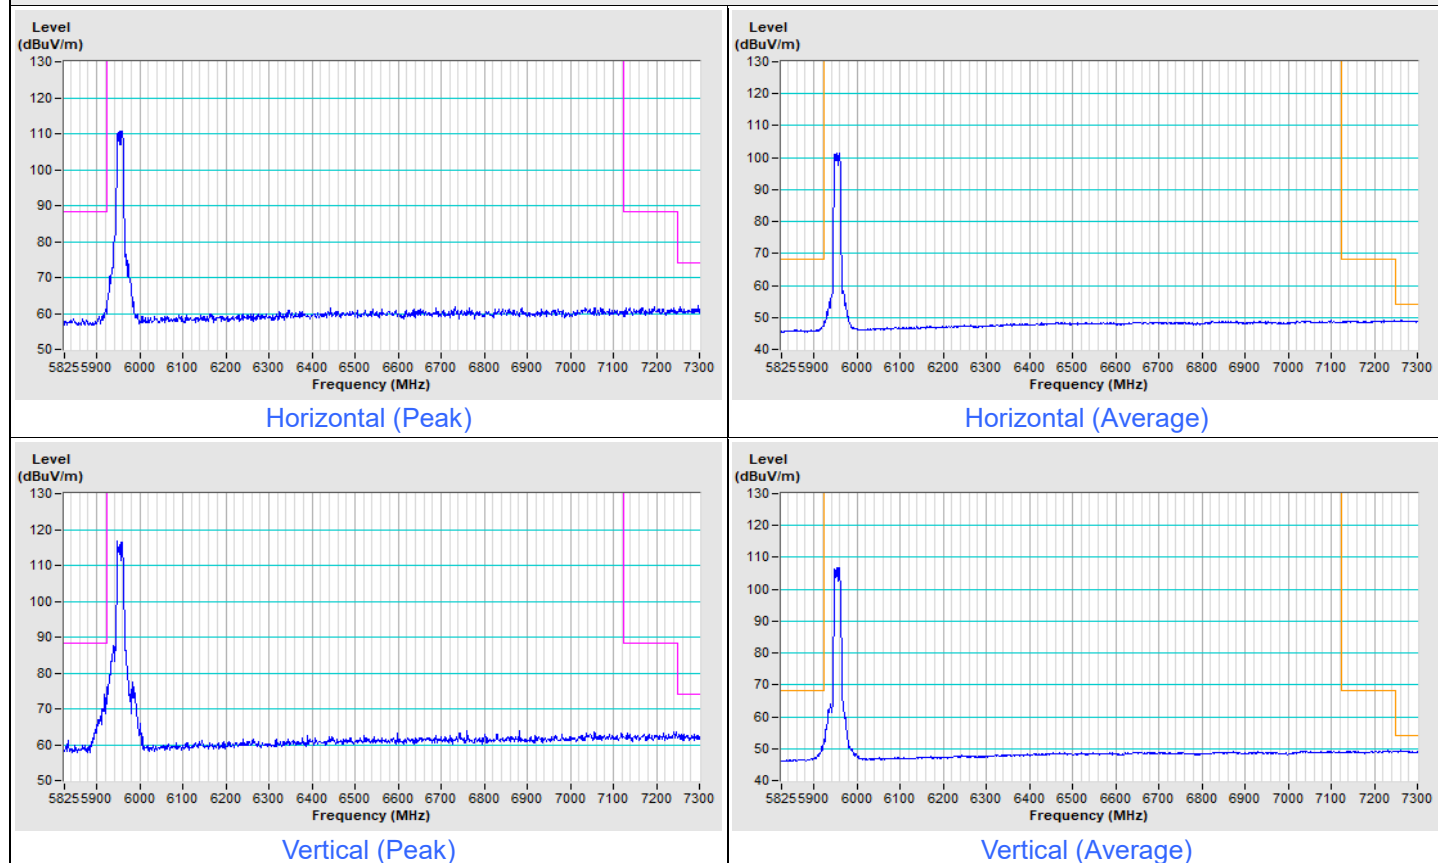


802.11be (EHT20) Channel 1

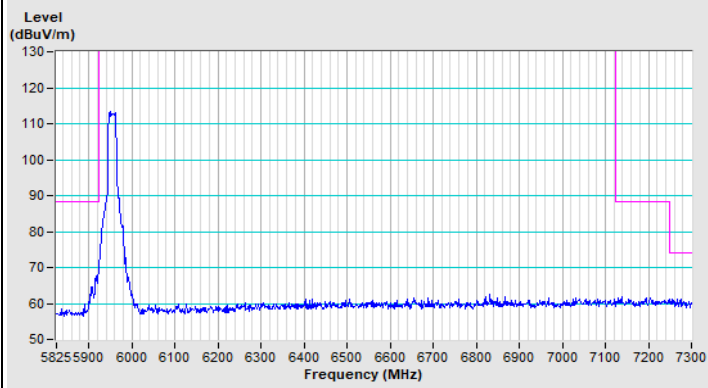


Horizontal (Peak)

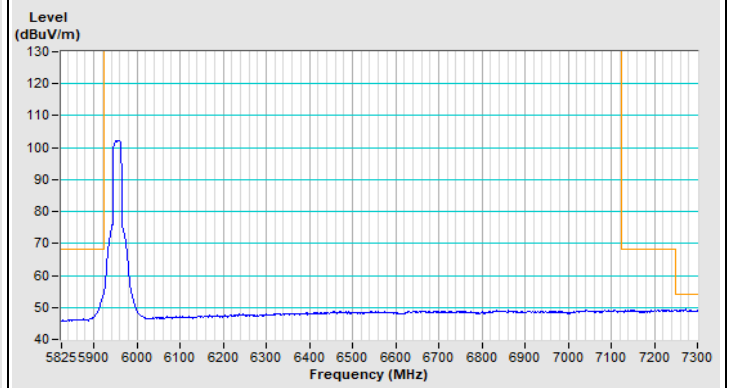

Horizontal (Average)

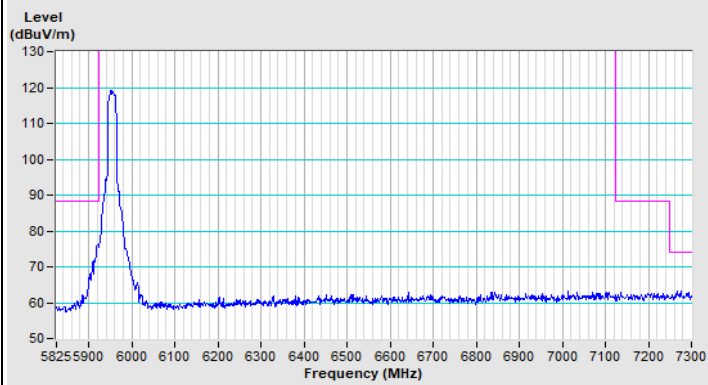


Vertical (Peak)

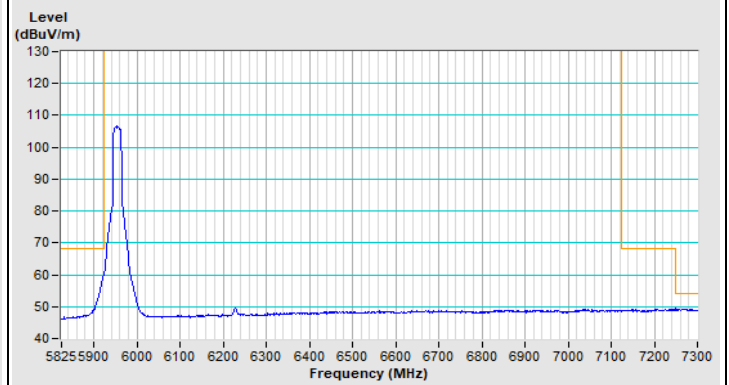

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 3

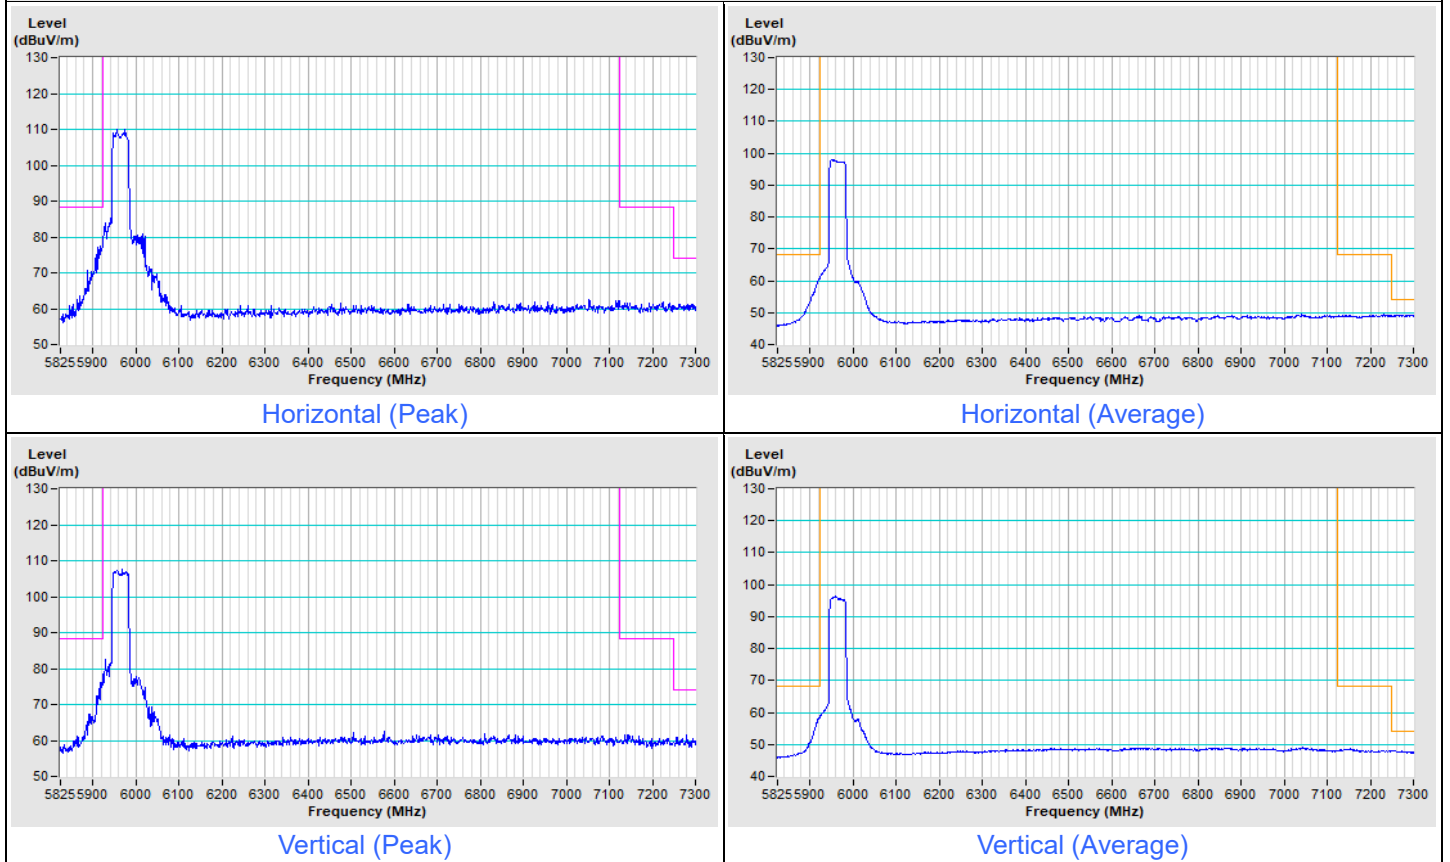


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

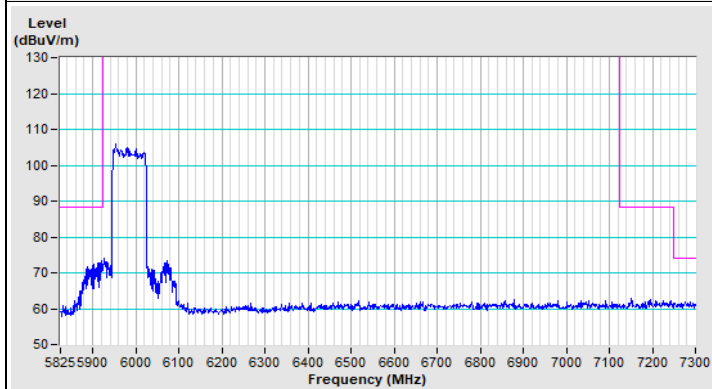


Horizontal (Peak)

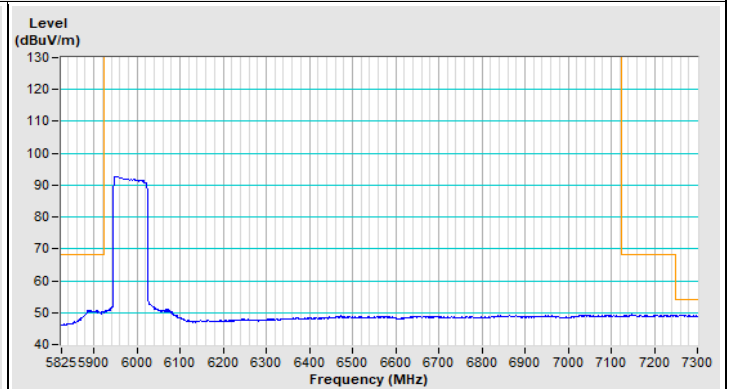

Horizontal (Average)

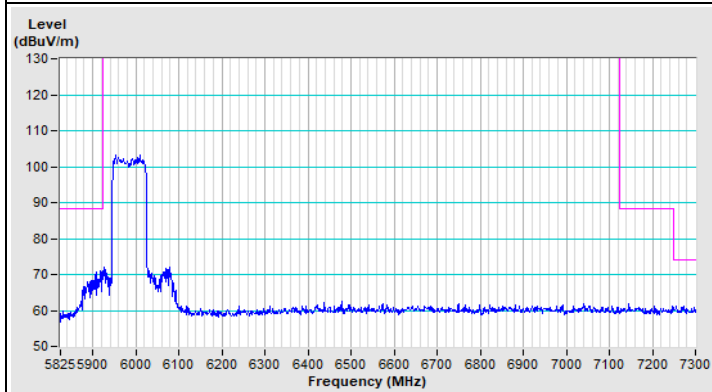


Vertical (Peak)

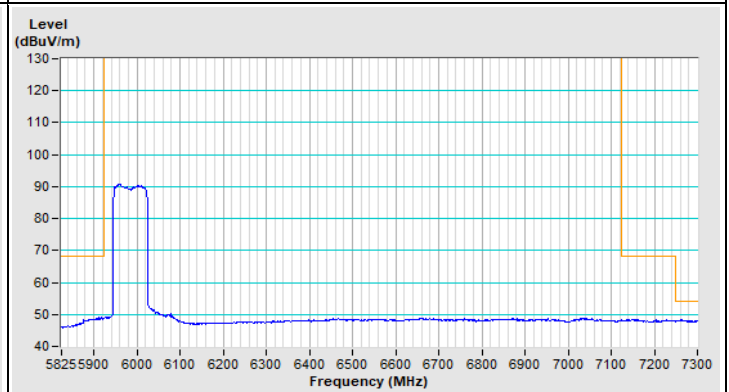

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 15

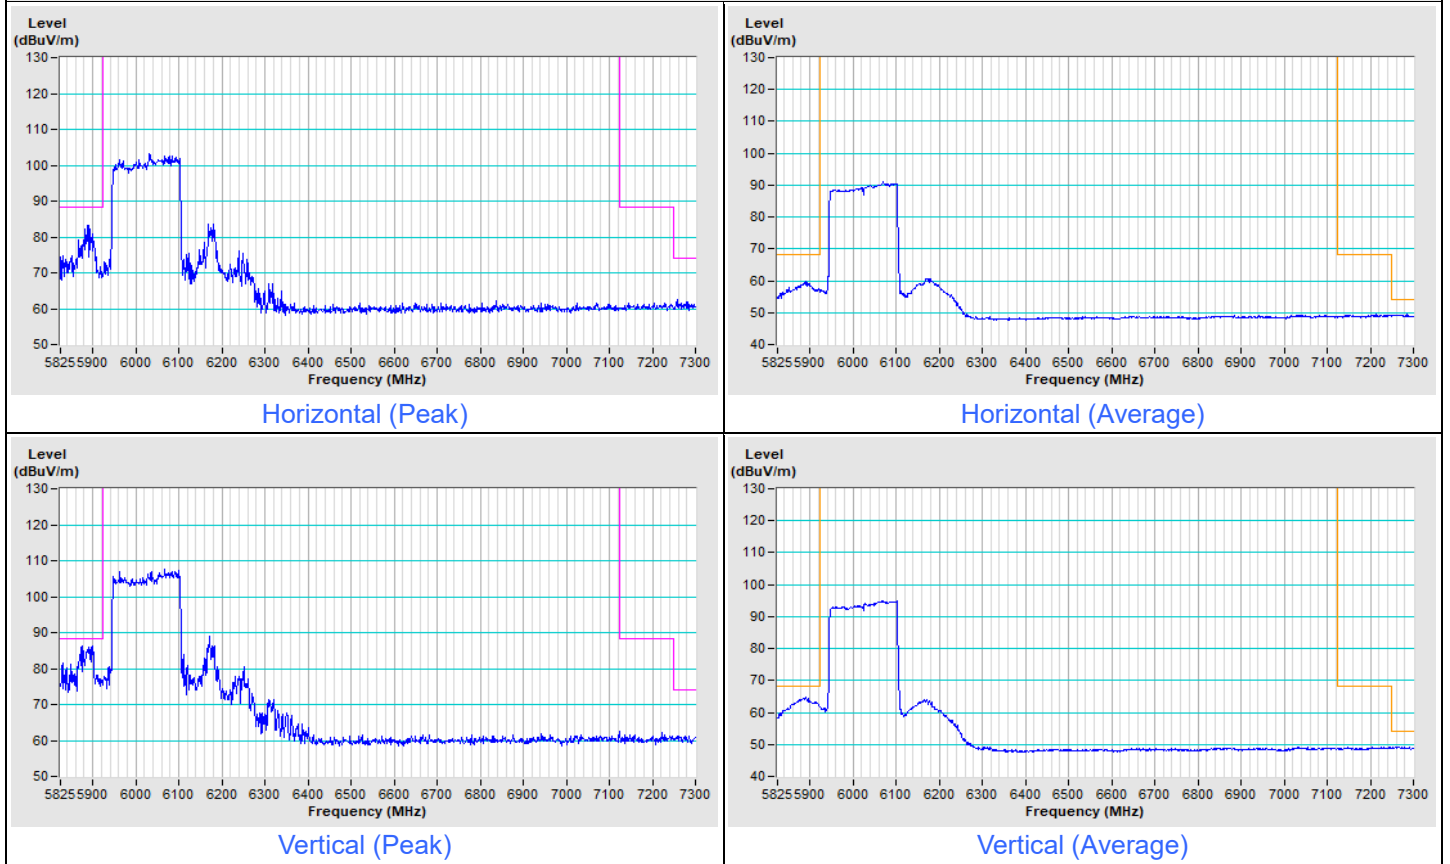


Plot of Band Edge


Partial RU_1TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

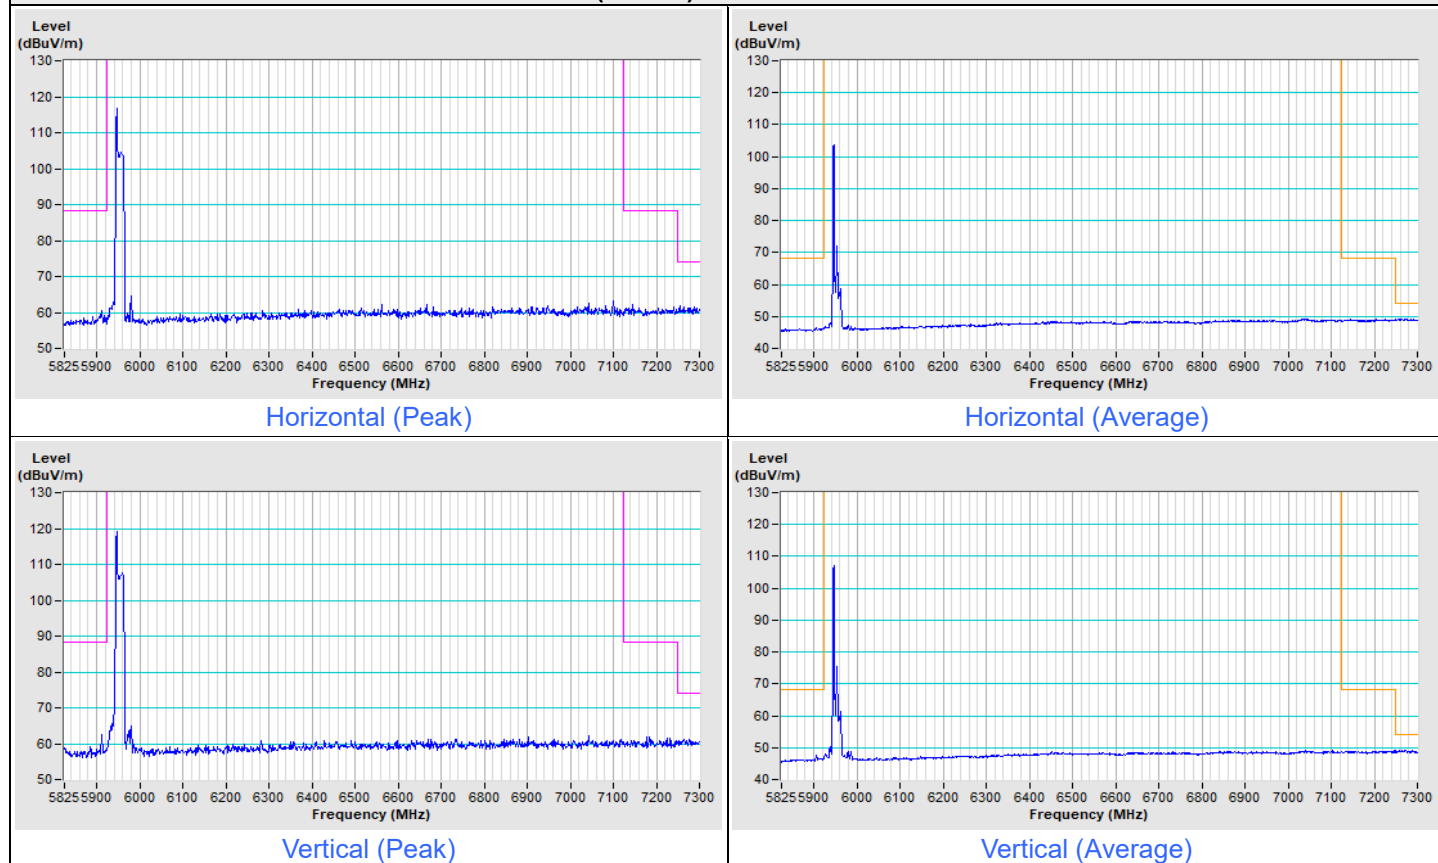


802.11be (EHT20) 52-tone RU Channel 1

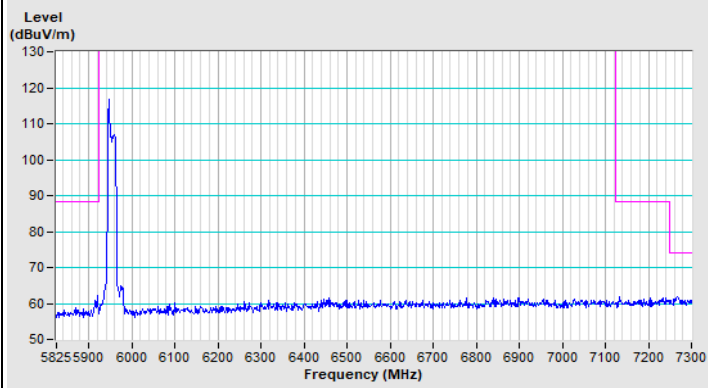


Horizontal (Peak)

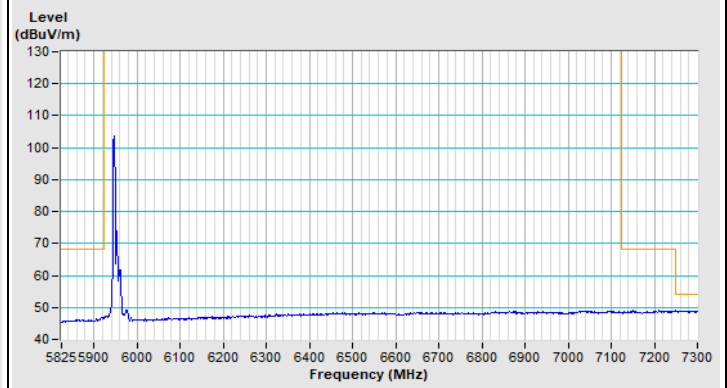

Horizontal (Average)

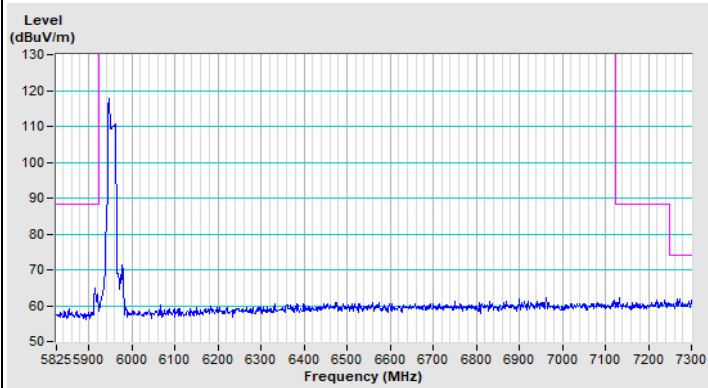


Vertical (Peak)

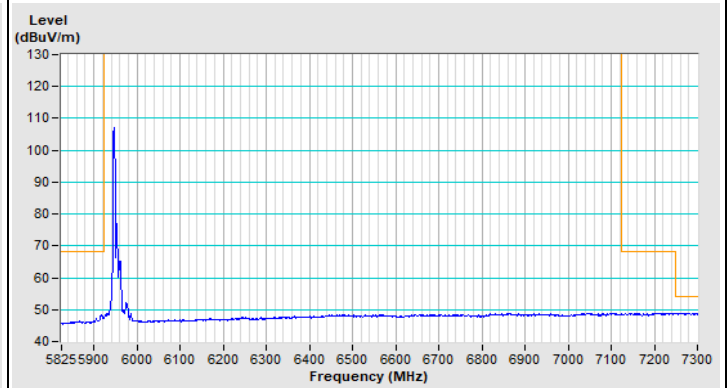

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

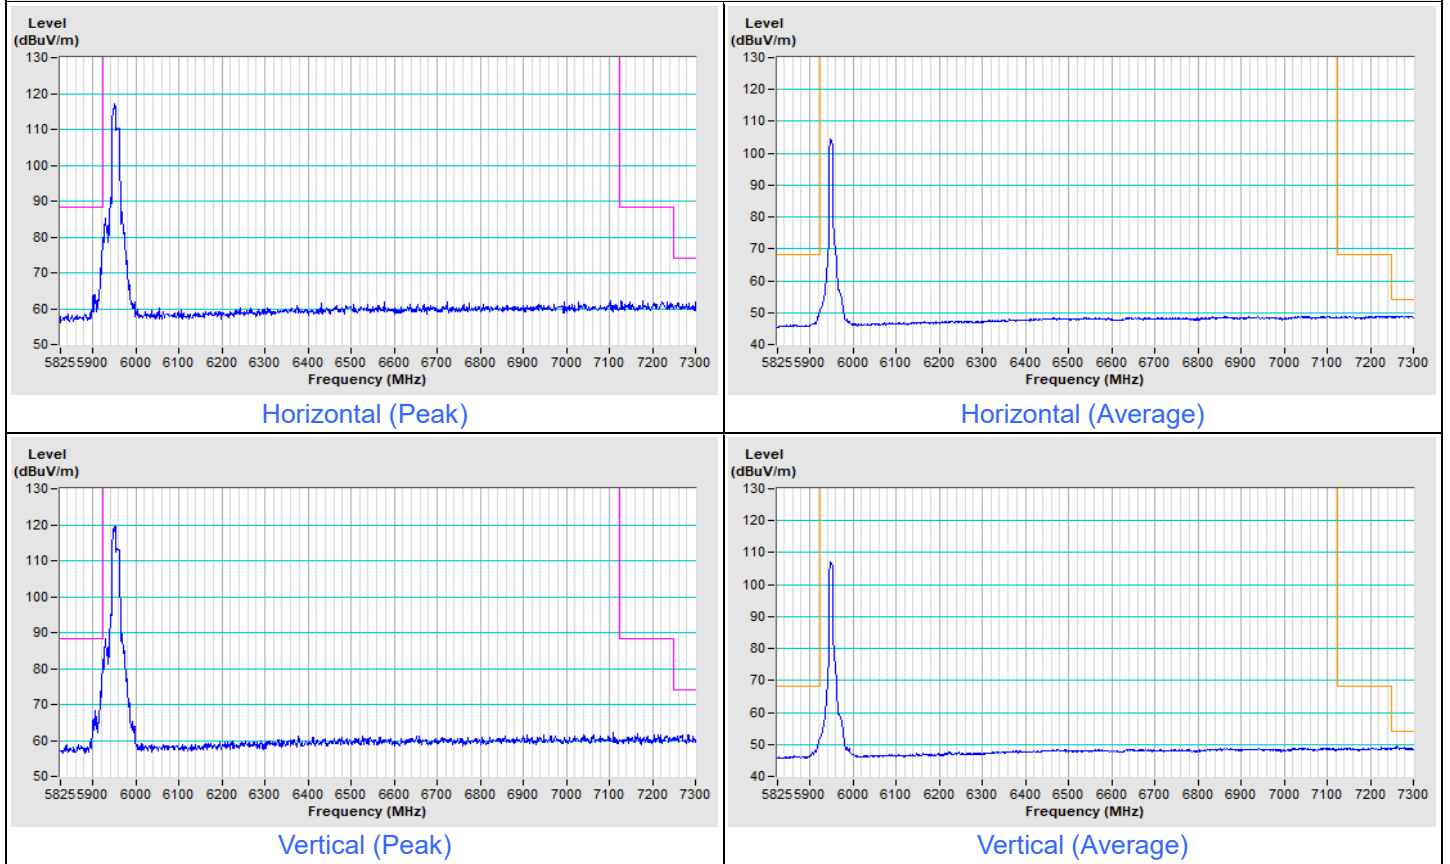


Plot of Band Edge


Partial RU_2TX

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

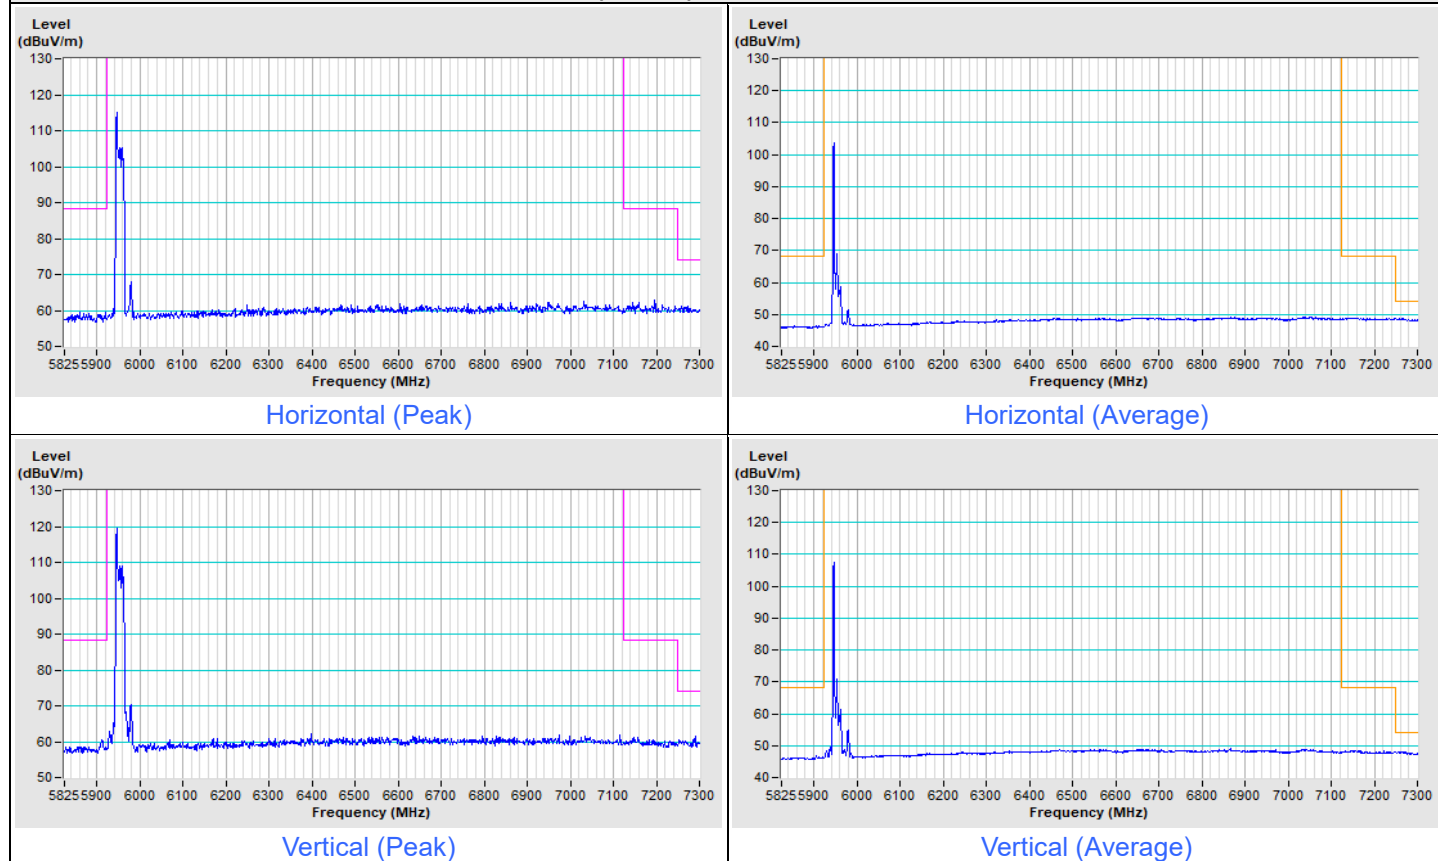


802.11be (EHT20) 52-tone RU Channel 1

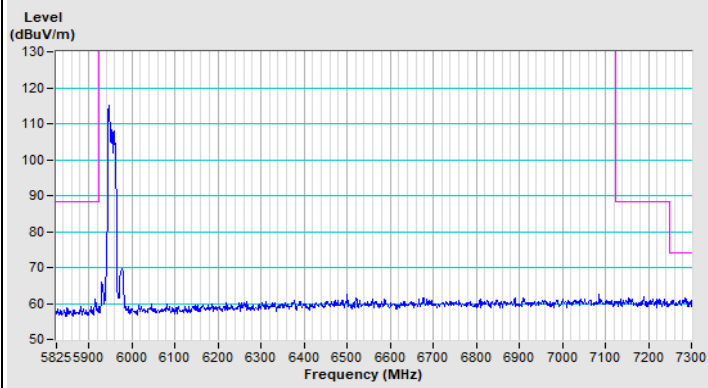


Horizontal (Peak)

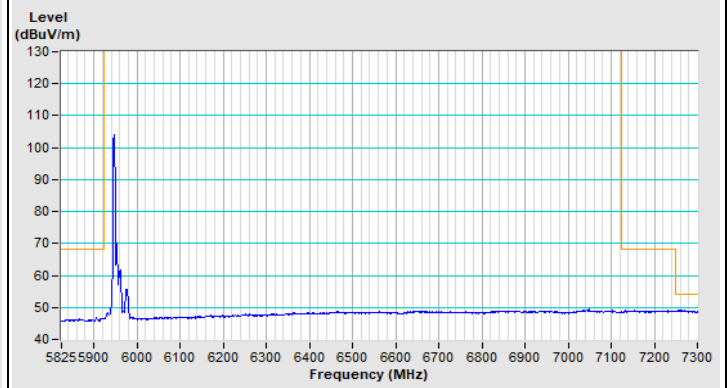

Horizontal (Average)

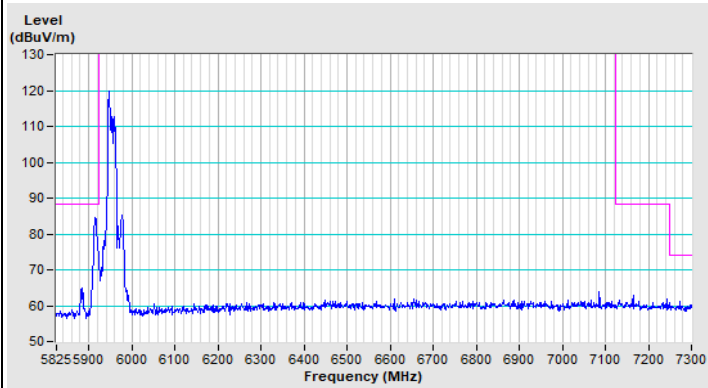


Vertical (Peak)

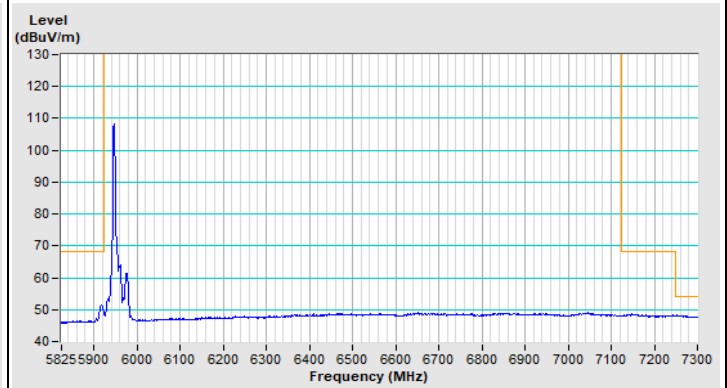

Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

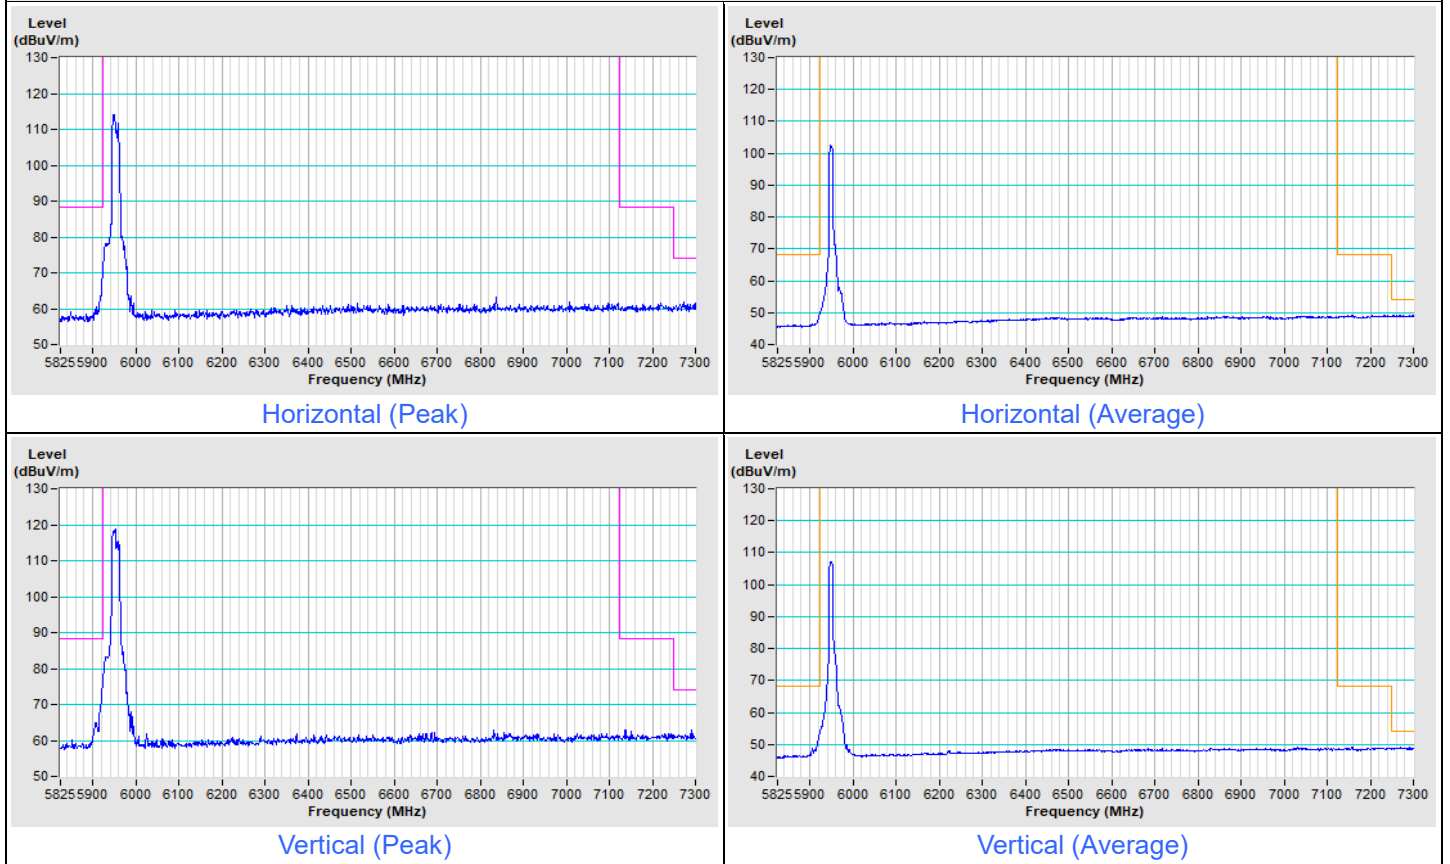

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---