

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 110 : 5550 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24.8 °C, 73.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5550.00        | 105.3 PK                |                |             | 3.92 H             | 7                    | 89.6             | 15.7                     |
| 2                                                    | *5550.00        | 95.3 AV                 |                |             | 3.92 H             | 7                    | 79.6             | 15.7                     |
| 3                                                    | 11100.00        | 63.7 PK                 | 74.0           | -10.3       | 1.88 H             | 294                  | 35.8             | 27.9                     |
| 4                                                    | 11100.00        | 46.4 AV                 | 54.0           | -7.6        | 1.88 H             | 294                  | 18.5             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5550.00        | 115.7 PK                |                |             | 1.69 V             | 94                   | 100.0            | 15.7                     |
| 2                                                    | *5550.00        | 105.5 AV                |                |             | 1.69 V             | 94                   | 89.8             | 15.7                     |
| 3                                                    | 11100.00        | 64.1 PK                 | 74.0           | -9.9        | 1.47 V             | 258                  | 36.2             | 27.9                     |
| 4                                                    | 11100.00        | 47.6 AV                 | 54.0           | -6.4        | 1.47 V             | 258                  | 19.7             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 134 : 5670 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.3 °C, 75.8 % RH                                                   |
| <b>Tested By</b>       | Ian Chang        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5670.00        | 101.9 PK                |                |             | 3.89 H             | 12                   | 86.6             | 15.3                     |
| 2                                                    | *5670.00        | 91.8 AV                 |                |             | 3.89 H             | 12                   | 76.5             | 15.3                     |
| 3                                                    | #5725.00        | 60.3 PK                 | 68.2           | -7.9        | 3.89 H             | 12                   | 45.2             | 15.1                     |
| 4                                                    | 11340.00        | 63.6 PK                 | 74.0           | -10.4       | 1.87 H             | 178                  | 35.4             | 28.2                     |
| 5                                                    | 11340.00        | 46.8 AV                 | 54.0           | -7.2        | 1.87 H             | 178                  | 18.6             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5670.00        | 111.4 PK                |                |             | 1.61 V             | 101                  | 96.1             | 15.3                     |
| 2                                                    | *5670.00        | 102.1 AV                |                |             | 1.61 V             | 101                  | 86.8             | 15.3                     |
| 3                                                    | #5725.00        | 66.6 PK                 | 68.2           | -1.6        | 1.61 V             | 101                  | 51.5             | 15.1                     |
| 4                                                    | 11340.00        | 64.8 PK                 | 74.0           | -9.2        | 1.84 V             | 155                  | 36.6             | 28.2                     |
| 5                                                    | 11340.00        | 48.3 AV                 | 54.0           | -5.7        | 1.84 V             | 155                  | 20.1             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 142 : 5710 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24.8 °C, 73.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.2 PK                 | 68.2           | -12.0       | 3.49 H             | 148                  | 40.8             | 15.4                     |
| 2                                                    | *5710.00        | 101.8 PK                |                |             | 3.49 H             | 148                  | 86.6             | 15.2                     |
| 3                                                    | *5710.00        | 92.1 AV                 |                |             | 3.49 H             | 148                  | 76.9             | 15.2                     |
| 4                                                    | 11420.00        | 62.7 PK                 | 74.0           | -11.3       | 2.09 H             | 181                  | 34.7             | 28.0                     |
| 5                                                    | 11420.00        | 45.6 AV                 | 54.0           | -8.4        | 2.09 H             | 181                  | 17.6             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.9 PK                 | 68.2           | -11.3       | 1.75 V             | 90                   | 41.5             | 15.4                     |
| 2                                                    | *5710.00        | 113.8 PK                |                |             | 1.75 V             | 90                   | 98.6             | 15.2                     |
| 3                                                    | *5710.00        | 104.5 AV                |                |             | 1.75 V             | 90                   | 89.3             | 15.2                     |
| 4                                                    | 11420.00        | 63.5 PK                 | 74.0           | -10.5       | 1.30 V             | 261                  | 35.5             | 28.0                     |
| 5                                                    | 11420.00        | 46.4 AV                 | 54.0           | -7.6        | 1.30 V             | 261                  | 18.4             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 151 : 5755 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24.8 °C, 73.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5641.20        | 55.1 PK                 | 68.2           | -13.1       | 3.35 H             | 141                  | 39.9             | 15.2                     |
| 2                                                    | *5755.00        | 103.1 PK                |                |             | 3.35 H             | 141                  | 88.0             | 15.1                     |
| 3                                                    | *5755.00        | 92.9 AV                 |                |             | 3.35 H             | 141                  | 77.8             | 15.1                     |
| 4                                                    | #5944.80        | 55.5 PK                 | 68.2           | -12.7       | 3.35 H             | 141                  | 40.2             | 15.3                     |
| 5                                                    | 11510.00        | 63.6 PK                 | 74.0           | -10.4       | 1.90 H             | 187                  | 35.8             | 27.8                     |
| 6                                                    | 11510.00        | 47.9 AV                 | 54.0           | -6.1        | 1.90 H             | 187                  | 20.1             | 27.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5650.80        | 59.0 PK                 | 68.7           | -9.7        | 1.69 V             | 89                   | 43.8             | 15.2                     |
| 2                                                    | *5755.00        | 115.1 PK                |                |             | 1.69 V             | 89                   | 100.0            | 15.1                     |
| 3                                                    | *5755.00        | 105.2 AV                |                |             | 1.69 V             | 89                   | 90.1             | 15.1                     |
| 4                                                    | #5998.00        | 56.6 PK                 | 68.2           | -11.6       | 1.69 V             | 89                   | 41.5             | 15.1                     |
| 5                                                    | 11510.00        | 64.4 PK                 | 74.0           | -9.6        | 1.95 V             | 174                  | 36.6             | 27.8                     |
| 6                                                    | 11510.00        | 48.7 AV                 | 54.0           | -5.3        | 1.95 V             | 174                  | 20.9             | 27.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 159 : 5795 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 19.5 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5639.76        | 54.7 PK                 | 68.2           | -13.5       | 2.35 H             | 90                   | 39.5             | 15.2                     |
| 2                                                    | *5795.00        | 104.0 PK                |                |             | 2.35 H             | 90                   | 89.2             | 14.8                     |
| 3                                                    | *5795.00        | 94.0 AV                 |                |             | 2.35 H             | 90                   | 79.2             | 14.8                     |
| 4                                                    | #5937.82        | 55.1 PK                 | 68.2           | -13.1       | 2.35 H             | 90                   | 39.9             | 15.2                     |
| 5                                                    | 11590.00        | 63.3 PK                 | 74.0           | -10.7       | 1.79 H             | 284                  | 35.2             | 28.1                     |
| 6                                                    | 11590.00        | 47.1 AV                 | 54.0           | -6.9        | 1.79 H             | 284                  | 19.0             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5647.82        | 55.3 PK                 | 68.2           | -12.9       | 1.61 V             | 112                  | 40.1             | 15.2                     |
| 2                                                    | *5795.00        | 114.1 PK                |                |             | 1.61 V             | 112                  | 99.3             | 14.8                     |
| 3                                                    | *5795.00        | 104.0 AV                |                |             | 1.61 V             | 112                  | 89.2             | 14.8                     |
| 4                                                    | #5966.09        | 56.5 PK                 | 68.2           | -11.7       | 1.61 V             | 112                  | 41.4             | 15.1                     |
| 5                                                    | 11590.00        | 64.0 PK                 | 74.0           | -10.0       | 1.87 V             | 199                  | 35.9             | 28.1                     |
| 6                                                    | 11590.00        | 48.3 AV                 | 54.0           | -5.7        | 1.87 V             | 199                  | 20.2             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 42 : 5210 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Ian Chang        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 66.1 PK                 | 74.0           | -7.9        | 3.88 H             | 16                   | 52.3             | 13.8                     |
| 2                                                    | 5150.00         | 48.0 AV                 | 54.0           | -6.0        | 3.88 H             | 16                   | 34.2             | 13.8                     |
| 3                                                    | *5210.00        | 95.6 PK                 |                |             | 3.88 H             | 16                   | 81.3             | 14.3                     |
| 4                                                    | *5210.00        | 85.7 AV                 |                |             | 3.88 H             | 16                   | 71.4             | 14.3                     |
| 5                                                    | 5350.00         | 56.0 PK                 | 74.0           | -18.0       | 3.88 H             | 16                   | 41.0             | 15.0                     |
| 6                                                    | 5350.00         | 46.3 AV                 | 54.0           | -7.7        | 3.88 H             | 16                   | 31.3             | 15.0                     |
| 7                                                    | #10420.00       | 61.7 PK                 | 68.2           | -6.5        | 1.84 H             | 264                  | 35.5             | 26.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 70.9 PK                 | 74.0           | -3.1        | 1.71 V             | 105                  | 57.1             | 13.8                     |
| 2                                                    | 5150.00         | 53.0 AV                 | 54.0           | -1.0        | 1.71 V             | 105                  | 39.2             | 13.8                     |
| 3                                                    | *5210.00        | 105.8 PK                |                |             | 1.71 V             | 105                  | 91.5             | 14.3                     |
| 4                                                    | *5210.00        | 96.0 AV                 |                |             | 1.71 V             | 105                  | 81.7             | 14.3                     |
| 5                                                    | 5350.00         | 60.6 PK                 | 74.0           | -13.4       | 1.71 V             | 105                  | 45.6             | 15.0                     |
| 6                                                    | 5350.00         | 45.8 AV                 | 54.0           | -8.2        | 1.71 V             | 105                  | 30.8             | 15.0                     |
| 7                                                    | #10420.00       | 63.0 PK                 | 68.2           | -5.2        | 1.89 V             | 256                  | 36.8             | 26.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 58 : 5290 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Ian Chang        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.0 PK                 | 74.0           | -20.0       | 3.92 H             | 10                   | 40.2             | 13.8                     |
| 2                                                    | 5150.00         | 42.4 AV                 | 54.0           | -11.6       | 3.92 H             | 10                   | 28.6             | 13.8                     |
| 3                                                    | *5290.00        | 96.6 PK                 |                |             | 3.92 H             | 10                   | 81.8             | 14.8                     |
| 4                                                    | *5290.00        | 86.4 AV                 |                |             | 3.92 H             | 10                   | 71.6             | 14.8                     |
| 5                                                    | 5350.00         | 65.2 PK                 | 74.0           | -8.8        | 3.92 H             | 10                   | 50.2             | 15.0                     |
| 6                                                    | 5350.00         | 47.6 AV                 | 54.0           | -6.4        | 3.92 H             | 10                   | 32.6             | 15.0                     |
| 7                                                    | #10580.00       | 62.3 PK                 | 68.2           | -5.9        | 2.63 H             | 285                  | 35.6             | 26.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 57.2 PK                 | 74.0           | -16.8       | 1.50 V             | 88                   | 43.4             | 13.8                     |
| 2                                                    | 5150.00         | 43.4 AV                 | 54.0           | -10.6       | 1.50 V             | 88                   | 29.6             | 13.8                     |
| 3                                                    | *5290.00        | 106.4 PK                |                |             | 1.50 V             | 88                   | 91.6             | 14.8                     |
| 4                                                    | *5290.00        | 96.1 AV                 |                |             | 1.50 V             | 88                   | 81.3             | 14.8                     |
| 5                                                    | 5350.00         | 69.7 PK                 | 74.0           | -4.3        | 1.50 V             | 88                   | 54.7             | 15.0                     |
| 6                                                    | 5350.00         | 52.8 AV                 | 54.0           | -1.2        | 1.50 V             | 88                   | 37.8             | 15.0                     |
| 7                                                    | #10580.00       | 63.2 PK                 | 68.2           | -5.0        | 1.84 V             | 127                  | 36.5             | 26.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 106 : 5530 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.3 °C, 75.8 % RH                                                   |
| <b>Tested By</b>       | Ian Chang        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 61.7 PK                 | 74.0           | -12.3       | 3.96 H             | 15                   | 46.4             | 15.3                     |
| 2                                                    | 5460.00         | 43.8 AV                 | 54.0           | -10.2       | 3.96 H             | 15                   | 28.5             | 15.3                     |
| 3                                                    | #5470.00        | 60.8 PK                 | 68.2           | -7.4        | 3.96 H             | 15                   | 45.4             | 15.4                     |
| 4                                                    | *5530.00        | 96.7 PK                 |                |             | 3.96 H             | 15                   | 81.2             | 15.5                     |
| 5                                                    | *5530.00        | 85.8 AV                 |                |             | 3.96 H             | 15                   | 70.3             | 15.5                     |
| 6                                                    | 11060.00        | 63.0 PK                 | 74.0           | -11.0       | 1.28 H             | 228                  | 35.4             | 27.6                     |
| 7                                                    | 11060.00        | 45.9 AV                 | 54.0           | -8.1        | 1.28 H             | 228                  | 18.3             | 27.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 67.7 PK                 | 74.0           | -6.3        | 1.61 V             | 89                   | 52.4             | 15.3                     |
| 2                                                    | 5460.00         | 48.9 AV                 | 54.0           | -5.1        | 1.61 V             | 89                   | 33.6             | 15.3                     |
| 3                                                    | #5470.00        | 67.2 PK                 | 68.2           | -1.0        | 1.61 V             | 89                   | 51.8             | 15.4                     |
| 4                                                    | *5530.00        | 106.7 PK                |                |             | 1.61 V             | 89                   | 91.2             | 15.5                     |
| 5                                                    | *5530.00        | 96.1 AV                 |                |             | 1.61 V             | 89                   | 80.6             | 15.5                     |
| 6                                                    | 11060.00        | 63.9 PK                 | 74.0           | -10.1       | 1.89 V             | 357                  | 36.3             | 27.6                     |
| 7                                                    | 11060.00        | 47.0 AV                 | 54.0           | -7.0        | 1.89 V             | 357                  | 19.4             | 27.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 122 : 5610 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.3 °C, 75.8 % RH                                                   |
| <b>Tested By</b>       | Ian Chang        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5610.00        | 98.4 PK                 |                |             | 3.95 H             | 6                    | 83.2             | 15.2                     |
| 2                                                    | *5610.00        | 88.3 AV                 |                |             | 3.95 H             | 6                    | 73.1             | 15.2                     |
| 3                                                    | #5725.00        | 62.5 PK                 | 68.2           | -5.7        | 3.95 H             | 6                    | 47.4             | 15.1                     |
| 4                                                    | 11220.00        | 63.0 PK                 | 74.0           | -11.0       | 1.89 H             | 298                  | 34.7             | 28.3                     |
| 5                                                    | 11220.00        | 45.9 AV                 | 54.0           | -8.1        | 1.89 H             | 298                  | 17.6             | 28.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5610.00        | 108.5 PK                |                |             | 1.61 V             | 93                   | 93.3             | 15.2                     |
| 2                                                    | *5610.00        | 97.5 AV                 |                |             | 1.61 V             | 93                   | 82.3             | 15.2                     |
| 3                                                    | #5725.00        | 67.1 PK                 | 68.2           | -1.1        | 1.61 V             | 93                   | 52.0             | 15.1                     |
| 4                                                    | 11220.00        | 64.1 PK                 | 74.0           | -9.9        | 1.44 V             | 154                  | 35.8             | 28.3                     |
| 5                                                    | 11220.00        | 47.6 AV                 | 54.0           | -6.4        | 1.44 V             | 154                  | 19.3             | 28.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 138 : 5690 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 24.4 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 55.4 PK                 | 68.2           | -12.8       | 2.33 H             | 91                   | 40.0             | 15.4                     |
| 2                                                    | *5690.00        | 96.3 PK                 |                |             | 2.33 H             | 91                   | 81.1             | 15.2                     |
| 3                                                    | *5690.00        | 86.6 AV                 |                |             | 2.33 H             | 91                   | 71.4             | 15.2                     |
| 4                                                    | 11380.00        | 63.3 PK                 | 74.0           | -10.7       | 2.38 H             | 222                  | 35.3             | 28.0                     |
| 5                                                    | 11380.00        | 47.2 AV                 | 54.0           | -6.8        | 2.38 H             | 222                  | 19.2             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 57.8 PK                 | 68.2           | -10.4       | 1.66 V             | 105                  | 42.4             | 15.4                     |
| 2                                                    | *5690.00        | 109.6 PK                |                |             | 1.66 V             | 105                  | 94.4             | 15.2                     |
| 3                                                    | *5690.00        | 99.5 AV                 |                |             | 1.66 V             | 105                  | 84.3             | 15.2                     |
| 4                                                    | 11380.00        | 64.2 PK                 | 74.0           | -9.8        | 1.52 V             | 284                  | 36.2             | 28.0                     |
| 5                                                    | 11380.00        | 48.1 AV                 | 54.0           | -5.9        | 1.52 V             | 284                  | 20.1             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 155 : 5775 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 19.5 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang        |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5644.06        | 55.5 PK                 | 68.2           | -12.7       | 2.33 H             | 93                   | 40.3             | 15.2                     |
| 2                                                    | *5775.00        | 98.1 PK                 |                |             | 2.33 H             | 93                   | 83.2             | 14.9                     |
| 3                                                    | *5775.00        | 88.1 AV                 |                |             | 2.33 H             | 93                   | 73.2             | 14.9                     |
| 4                                                    | #5930.57        | 55.1 PK                 | 68.2           | -13.1       | 2.33 H             | 93                   | 39.9             | 15.2                     |
| 5                                                    | 11550.00        | 61.2 PK                 | 74.0           | -12.8       | 2.14 H             | 162                  | 34.8             | 26.4                     |
| 6                                                    | 11550.00        | 45.3 AV                 | 54.0           | -8.7        | 2.14 H             | 162                  | 18.9             | 26.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5648.98        | 62.4 PK                 | 68.2           | -5.8        | 1.70 V             | 108                  | 47.2             | 15.2                     |
| 2                                                    | *5775.00        | 108.7 PK                |                |             | 1.70 V             | 108                  | 93.8             | 14.9                     |
| 3                                                    | *5775.00        | 98.3 AV                 |                |             | 1.70 V             | 108                  | 83.4             | 14.9                     |
| 4                                                    | #5928.04        | 59.1 PK                 | 68.2           | -9.1        | 1.70 V             | 108                  | 43.9             | 15.2                     |
| 5                                                    | 11550.00        | 64.2 PK                 | 74.0           | -9.8        | 1.96 V             | 226                  | 36.2             | 28.0                     |
| 6                                                    | 11550.00        | 48.3 AV                 | 54.0           | -5.7        | 1.96 V             | 226                  | 20.3             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                   |                                          |                                                                      |
|------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT160) | <b>Channel</b>                           | CH 50 : 5250 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Ian Chang         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 63.9 PK                 | 74.0           | -10.1       | 3.89 H             | 15                   | 50.1             | 13.8                     |
| 2                                                    | 5150.00         | 47.9 AV                 | 54.0           | -6.1        | 3.89 H             | 15                   | 34.1             | 13.8                     |
| 3                                                    | *5250.00        | 89.0 PK                 |                |             | 3.89 H             | 15                   | 74.3             | 14.7                     |
| 4                                                    | *5250.00        | 81.3 AV                 |                |             | 3.89 H             | 15                   | 66.6             | 14.7                     |
| 5                                                    | 5350.00         | 65.1 PK                 | 74.0           | -8.9        | 3.89 H             | 15                   | 50.1             | 15.0                     |
| 6                                                    | 5350.00         | 49.3 AV                 | 54.0           | -4.7        | 3.89 H             | 15                   | 34.3             | 15.0                     |
| 7                                                    | #10500.00       | 61.6 PK                 | 68.2           | -6.6        | 1.99 H             | 224                  | 35.4             | 26.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 66.3 PK                 | 74.0           | -7.7        | 1.57 V             | 87                   | 52.5             | 13.8                     |
| 2                                                    | 5150.00         | 50.3 AV                 | 54.0           | -3.7        | 1.57 V             | 87                   | 36.5             | 13.8                     |
| 3                                                    | *5250.00        | 99.3 PK                 |                |             | 1.57 V             | 87                   | 84.6             | 14.7                     |
| 4                                                    | *5250.00        | 91.1 AV                 |                |             | 1.57 V             | 87                   | 76.4             | 14.7                     |
| 5                                                    | 5350.00         | 66.3 PK                 | 74.0           | -7.7        | 1.57 V             | 87                   | 51.3             | 15.0                     |
| 6                                                    | 5350.00         | 51.8 AV                 | 54.0           | -2.2        | 1.57 V             | 87                   | 36.8             | 15.0                     |
| 7                                                    | #10500.00       | 62.7 PK                 | 68.2           | -5.5        | 1.84 V             | 124                  | 36.5             | 26.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                   |                                          |                                                                      |
|------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT160) | <b>Channel</b>                           | CH 114 : 5570 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 22.3 °C, 75.8 % RH                                                   |
| <b>Tested By</b>       | Ian Chang         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 60.5 PK                 | 74.0           | -13.5       | 3.95 H             | 13                   | 45.2             | 15.3                     |
| 2                                                    | 5460.00         | 44.9 AV                 | 54.0           | -9.1        | 3.95 H             | 13                   | 29.6             | 15.3                     |
| 3                                                    | #5470.00        | 56.6 PK                 | 68.2           | -11.6       | 3.95 H             | 13                   | 41.2             | 15.4                     |
| 4                                                    | *5570.00        | 90.0 PK                 |                |             | 3.95 H             | 13                   | 74.5             | 15.5                     |
| 5                                                    | *5570.00        | 79.8 AV                 |                |             | 3.95 H             | 13                   | 64.3             | 15.5                     |
| 6                                                    | #5725.00        | 62.3 PK                 | 68.2           | -5.9        | 3.95 H             | 13                   | 47.2             | 15.1                     |
| 7                                                    | 11140.00        | 62.8 PK                 | 74.0           | -11.2       | 2.15 H             | 145                  | 34.8             | 28.0                     |
| 8                                                    | 11140.00        | 46.8 AV                 | 54.0           | -7.2        | 2.15 H             | 145                  | 18.8             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 64.7 PK                 | 74.0           | -9.3        | 1.60 V             | 83                   | 49.4             | 15.3                     |
| 2                                                    | 5460.00         | 46.5 AV                 | 54.0           | -7.5        | 1.60 V             | 83                   | 31.2             | 15.3                     |
| 3                                                    | #5470.00        | 58.8 PK                 | 68.2           | -9.4        | 1.60 V             | 83                   | 43.4             | 15.4                     |
| 4                                                    | *5570.00        | 100.3 PK                |                |             | 1.60 V             | 83                   | 84.8             | 15.5                     |
| 5                                                    | *5570.00        | 89.9 AV                 |                |             | 1.60 V             | 83                   | 74.4             | 15.5                     |
| 6                                                    | #5725.00        | 66.7 PK                 | 68.2           | -1.5        | 1.60 V             | 83                   | 51.6             | 15.1                     |
| 7                                                    | 11140.00        | 63.4 PK                 | 74.0           | -10.6       | 1.88 V             | 254                  | 35.4             | 28.0                     |
| 8                                                    | 11140.00        | 47.6 AV                 | 54.0           | -6.4        | 1.88 V             | 254                  | 19.6             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 36 : 5180 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.9 PK                 | 74.0           | -19.1       | 2.74 H             | 26                   | 41.1             | 13.8                     |
| 2                                                    | 5150.00         | 43.9 AV                 | 54.0           | -10.1       | 2.74 H             | 26                   | 30.1             | 13.8                     |
| 3                                                    | *5180.00        | 101.6 PK                |                |             | 2.74 H             | 26                   | 87.6             | 14.0                     |
| 4                                                    | *5180.00        | 92.7 AV                 |                |             | 2.74 H             | 26                   | 78.7             | 14.0                     |
| 5                                                    | #10360.00       | 60.3 PK                 | 68.2           | -7.9        | 2.00 H             | 249                  | 34.5             | 25.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 56.2 PK                 | 74.0           | -17.8       | 1.70 V             | 110                  | 42.4             | 13.8                     |
| 2                                                    | 5150.00         | 45.9 AV                 | 54.0           | -8.1        | 1.70 V             | 110                  | 32.1             | 13.8                     |
| 3                                                    | *5180.00        | 112.0 PK                |                |             | 1.70 V             | 110                  | 98.0             | 14.0                     |
| 4                                                    | *5180.00        | 103.1 AV                |                |             | 1.70 V             | 110                  | 89.1             | 14.0                     |
| 5                                                    | #10360.00       | 61.4 PK                 | 68.2           | -6.8        | 1.96 V             | 123                  | 35.6             | 25.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 40 : 5200 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 105.2 PK                |                |             | 2.62 H             | 13                   | 91.1             | 14.1                     |
| 2                                                    | *5200.00        | 94.2 AV                 |                |             | 2.62 H             | 13                   | 80.1             | 14.1                     |
| 3                                                    | #10400.00       | 61.2 PK                 | 68.2           | -7.0        | 1.88 H             | 236                  | 35.1             | 26.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 115.7 PK                |                |             | 1.58 V             | 97                   | 101.6            | 14.1                     |
| 2                                                    | *5200.00        | 104.7 AV                |                |             | 1.58 V             | 97                   | 90.6             | 14.1                     |
| 3                                                    | #10400.00       | 62.3 PK                 | 68.2           | -5.9        | 1.84 V             | 136                  | 36.2             | 26.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 48 : 5240 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 106.5 PK                |                |             | 2.83 H             | 35                   | 92.1             | 14.4                     |
| 2                                                    | *5240.00        | 96.4 AV                 |                |             | 2.83 H             | 35                   | 82.0             | 14.4                     |
| 3                                                    | 5350.00         | 54.8 PK                 | 74.0           | -19.2       | 2.83 H             | 35                   | 39.8             | 15.0                     |
| 4                                                    | 5350.00         | 44.9 AV                 | 54.0           | -9.1        | 2.83 H             | 35                   | 29.9             | 15.0                     |
| 5                                                    | #10480.00       | 61.6 PK                 | 68.2           | -6.6        | 2.05 H             | 251                  | 35.3             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 117.0 PK                |                |             | 1.80 V             | 111                  | 102.6            | 14.4                     |
| 2                                                    | *5240.00        | 107.6 AV                |                |             | 1.80 V             | 111                  | 93.2             | 14.4                     |
| 3                                                    | 5350.00         | 55.1 PK                 | 74.0           | -18.9       | 1.80 V             | 111                  | 40.1             | 15.0                     |
| 4                                                    | 5350.00         | 45.0 AV                 | 54.0           | -9.0        | 1.80 V             | 111                  | 30.0             | 15.0                     |
| 5                                                    | #10480.00       | 62.7 PK                 | 68.2           | -5.5        | 2.09 V             | 150                  | 36.4             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 52 : 5260 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.7 PK                 | 74.0           | -19.3       | 2.31 H             | 225                  | 40.9             | 13.8                     |
| 2                                                    | 5150.00         | 43.6 AV                 | 54.0           | -10.4       | 2.31 H             | 225                  | 29.8             | 13.8                     |
| 3                                                    | *5260.00        | 105.3 PK                |                |             | 2.31 H             | 225                  | 90.6             | 14.7                     |
| 4                                                    | *5260.00        | 96.1 AV                 |                |             | 2.31 H             | 225                  | 81.4             | 14.7                     |
| 5                                                    | #10520.00       | 61.1 PK                 | 68.2           | -7.1        | 1.98 H             | 184                  | 34.8             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.9 PK                 | 74.0           | -19.1       | 1.59 V             | 279                  | 41.1             | 13.8                     |
| 2                                                    | 5150.00         | 43.8 AV                 | 54.0           | -10.2       | 1.59 V             | 279                  | 30.0             | 13.8                     |
| 3                                                    | *5260.00        | 115.8 PK                |                |             | 1.59 V             | 279                  | 101.1            | 14.7                     |
| 4                                                    | *5260.00        | 106.6 AV                |                |             | 1.59 V             | 279                  | 91.9             | 14.7                     |
| 5                                                    | #10520.00       | 62.2 PK                 | 68.2           | -6.0        | 1.84 V             | 72                   | 35.9             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 60 : 5300 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 103.9 PK                |                |             | 2.37 H             | 49                   | 88.9             | 15.0                     |
| 2                                                    | *5300.00        | 93.8 AV                 |                |             | 2.37 H             | 49                   | 78.8             | 15.0                     |
| 3                                                    | 10600.00        | 61.6 PK                 | 74.0           | -12.4       | 1.97 H             | 15                   | 34.9             | 26.7                     |
| 4                                                    | 10600.00        | 45.5 AV                 | 54.0           | -8.5        | 1.97 H             | 15                   | 18.8             | 26.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 114.4 PK                |                |             | 1.65 V             | 103                  | 99.4             | 15.0                     |
| 2                                                    | *5300.00        | 105.0 AV                |                |             | 1.65 V             | 103                  | 90.0             | 15.0                     |
| 3                                                    | 10600.00        | 62.7 PK                 | 74.0           | -11.3       | 1.85 V             | 241                  | 36.0             | 26.7                     |
| 4                                                    | 10600.00        | 46.6 AV                 | 54.0           | -7.4        | 1.85 V             | 241                  | 19.9             | 26.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 64 : 5320 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 102.2 PK                |                |             | 2.30 H             | 213                  | 87.3             | 14.9                     |
| 2                                                    | *5320.00        | 92.6 AV                 |                |             | 2.30 H             | 213                  | 77.7             | 14.9                     |
| 3                                                    | 5350.00         | 55.3 PK                 | 74.0           | -18.7       | 2.30 H             | 213                  | 40.3             | 15.0                     |
| 4                                                    | 5350.00         | 44.6 AV                 | 54.0           | -9.4        | 2.30 H             | 213                  | 29.6             | 15.0                     |
| 5                                                    | 10640.00        | 61.3 PK                 | 74.0           | -12.7       | 1.97 H             | 172                  | 34.4             | 26.9                     |
| 6                                                    | 10640.00        | 45.2 AV                 | 54.0           | -8.8        | 1.97 H             | 172                  | 18.3             | 26.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 113.6 PK                |                |             | 1.58 V             | 267                  | 98.7             | 14.9                     |
| 2                                                    | *5320.00        | 104.0 AV                |                |             | 1.58 V             | 267                  | 89.1             | 14.9                     |
| 3                                                    | 5350.00         | 56.1 PK                 | 74.0           | -17.9       | 1.58 V             | 267                  | 41.1             | 15.0                     |
| 4                                                    | 5350.00         | 46.0 AV                 | 54.0           | -8.0        | 1.58 V             | 267                  | 31.0             | 15.0                     |
| 5                                                    | 10640.00        | 62.4 PK                 | 74.0           | -11.6       | 1.83 V             | 60                   | 35.5             | 26.9                     |
| 6                                                    | 10640.00        | 46.3 AV                 | 54.0           | -7.7        | 1.83 V             | 60                   | 19.4             | 26.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 100 : 5500 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 55.4 PK                 | 74.0           | -18.6       | 2.27 H             | 210                  | 40.1             | 15.3                     |
| 2                                                    | 5460.00         | 44.9 AV                 | 54.0           | -9.1        | 2.27 H             | 210                  | 29.6             | 15.3                     |
| 3                                                    | #5470.00        | 55.6 PK                 | 68.2           | -12.6       | 2.27 H             | 210                  | 40.2             | 15.4                     |
| 4                                                    | *5500.00        | 101.3 PK                |                |             | 2.27 H             | 210                  | 85.8             | 15.5                     |
| 5                                                    | *5500.00        | 91.4 AV                 |                |             | 2.27 H             | 210                  | 75.9             | 15.5                     |
| 6                                                    | 11000.00        | 61.4 PK                 | 74.0           | -12.6       | 1.94 H             | 169                  | 34.2             | 27.2                     |
| 7                                                    | 11000.00        | 45.4 AV                 | 54.0           | -8.6        | 1.94 H             | 169                  | 18.2             | 27.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 55.5 PK                 | 74.0           | -18.5       | 1.55 V             | 270                  | 40.2             | 15.3                     |
| 2                                                    | 5460.00         | 45.1 AV                 | 54.0           | -8.9        | 1.55 V             | 270                  | 29.8             | 15.3                     |
| 3                                                    | #5470.00        | 55.7 PK                 | 68.2           | -12.5       | 1.55 V             | 270                  | 40.3             | 15.4                     |
| 4                                                    | *5500.00        | 112.6 PK                |                |             | 1.55 V             | 270                  | 97.1             | 15.5                     |
| 5                                                    | *5500.00        | 102.8 AV                |                |             | 1.55 V             | 270                  | 87.3             | 15.5                     |
| 6                                                    | 11000.00        | 62.5 PK                 | 74.0           | -11.5       | 1.80 V             | 57                   | 35.3             | 27.2                     |
| 7                                                    | 11000.00        | 46.5 AV                 | 54.0           | -7.5        | 1.80 V             | 57                   | 19.3             | 27.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 116 : 5580 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 104.9 PK                |                |             | 2.52 H             | 19                   | 89.5             | 15.4                     |
| 2                                                    | *5580.00        | 95.4 AV                 |                |             | 2.52 H             | 19                   | 80.0             | 15.4                     |
| 3                                                    | 11160.00        | 63.1 PK                 | 74.0           | -10.9       | 2.14 H             | 189                  | 35.0             | 28.1                     |
| 4                                                    | 11160.00        | 47.0 AV                 | 54.0           | -7.0        | 2.14 H             | 189                  | 18.9             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 114.4 PK                |                |             | 1.63 V             | 106                  | 99.0             | 15.4                     |
| 2                                                    | *5580.00        | 105.8 AV                |                |             | 1.63 V             | 106                  | 90.4             | 15.4                     |
| 3                                                    | 11160.00        | 64.0 PK                 | 74.0           | -10.0       | 1.46 V             | 321                  | 35.9             | 28.1                     |
| 4                                                    | 11160.00        | 48.1 AV                 | 54.0           | -5.9        | 1.46 V             | 321                  | 20.0             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 140 : 5700 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 101.2 PK                |                |             | 2.28 H             | 207                  | 86.1             | 15.1                     |
| 2                                                    | *5700.00        | 90.7 AV                 |                |             | 2.28 H             | 207                  | 75.6             | 15.1                     |
| 3                                                    | #5725.00        | 55.6 PK                 | 68.2           | -12.6       | 2.28 H             | 207                  | 40.5             | 15.1                     |
| 4                                                    | 11400.00        | 62.4 PK                 | 74.0           | -11.6       | 1.93 H             | 166                  | 34.4             | 28.0                     |
| 5                                                    | 11400.00        | 46.4 AV                 | 54.0           | -7.6        | 1.93 H             | 166                  | 18.4             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 112.4 PK                |                |             | 1.56 V             | 267                  | 97.3             | 15.1                     |
| 2                                                    | *5700.00        | 101.9 AV                |                |             | 1.56 V             | 267                  | 86.8             | 15.1                     |
| 3                                                    | #5725.00        | 55.7 PK                 | 68.2           | -12.5       | 1.56 V             | 267                  | 40.6             | 15.1                     |
| 4                                                    | 11400.00        | 63.5 PK                 | 74.0           | -10.5       | 1.81 V             | 54                   | 35.5             | 28.0                     |
| 5                                                    | 11400.00        | 47.5 AV                 | 54.0           | -6.5        | 1.81 V             | 54                   | 19.5             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 144 : 5720 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.0 PK                 | 68.2           | -12.2       | 2.07 H             | 191                  | 40.6             | 15.4                     |
| 2                                                    | *5720.00        | 107.1 PK                |                |             | 2.07 H             | 191                  | 92.0             | 15.1                     |
| 3                                                    | *5720.00        | 98.2 AV                 |                |             | 2.07 H             | 191                  | 83.1             | 15.1                     |
| 4                                                    | 11440.00        | 62.2 PK                 | 74.0           | -11.8       | 1.74 H             | 148                  | 34.3             | 27.9                     |
| 5                                                    | 11440.00        | 46.4 AV                 | 54.0           | -7.6        | 1.74 H             | 148                  | 18.5             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.3 PK                 | 68.2           | -11.9       | 1.59 V             | 272                  | 40.9             | 15.4                     |
| 2                                                    | *5720.00        | 117.6 PK                |                |             | 1.59 V             | 272                  | 102.5            | 15.1                     |
| 3                                                    | *5720.00        | 108.8 AV                |                |             | 1.59 V             | 272                  | 93.7             | 15.1                     |
| 4                                                    | 11440.00        | 63.3 PK                 | 74.0           | -10.7       | 1.84 V             | 67                   | 35.4             | 27.9                     |
| 5                                                    | 11440.00        | 47.5 AV                 | 54.0           | -6.5        | 1.84 V             | 67                   | 19.6             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 149 : 5745 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5640.67        | 54.2 PK                 | 68.2           | -14.0       | 2.39 H             | 22                   | 39.0             | 15.2                     |
| 2                                                    | *5745.00        | 114.1 PK                |                |             | 2.39 H             | 22                   | 99.0             | 15.1                     |
| 3                                                    | *5745.00        | 105.0 AV                |                |             | 2.39 H             | 22                   | 89.9             | 15.1                     |
| 4                                                    | #5935.50        | 54.1 PK                 | 68.2           | -14.1       | 2.39 H             | 22                   | 38.9             | 15.2                     |
| 5                                                    | 11490.00        | 63.2 PK                 | 74.0           | -10.8       | 1.85 H             | 287                  | 35.3             | 27.9                     |
| 6                                                    | 11490.00        | 47.2 AV                 | 54.0           | -6.8        | 1.85 H             | 287                  | 19.3             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5638.94        | 55.8 PK                 | 68.2           | -12.4       | 1.59 V             | 112                  | 40.6             | 15.2                     |
| 2                                                    | *5745.00        | 122.5 PK                |                |             | 1.59 V             | 112                  | 107.4            | 15.1                     |
| 3                                                    | *5745.00        | 113.5 AV                |                |             | 1.59 V             | 112                  | 98.4             | 15.1                     |
| 4                                                    | #5952.92        | 54.5 PK                 | 68.2           | -13.7       | 1.59 V             | 112                  | 39.3             | 15.2                     |
| 5                                                    | 11490.00        | 64.2 PK                 | 74.0           | -9.8        | 2.36 V             | 298                  | 36.3             | 27.9                     |
| 6                                                    | 11490.00        | 48.4 AV                 | 54.0           | -5.6        | 2.36 V             | 298                  | 20.5             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 157 : 5785 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5640.73        | 55.5 PK                 | 68.2           | -12.7       | 2.28 H             | 206                  | 40.3             | 15.2                     |
| 2                                                    | *5785.00        | 114.6 PK                |                |             | 2.28 H             | 206                  | 99.7             | 14.9                     |
| 3                                                    | *5785.00        | 105.5 AV                |                |             | 2.28 H             | 206                  | 90.6             | 14.9                     |
| 4                                                    | #5934.27        | 56.4 PK                 | 68.2           | -11.8       | 2.28 H             | 206                  | 41.2             | 15.2                     |
| 5                                                    | 11570.00        | 62.6 PK                 | 74.0           | -11.4       | 1.95 H             | 165                  | 34.5             | 28.1                     |
| 6                                                    | 11570.00        | 46.8 AV                 | 54.0           | -7.2        | 1.95 H             | 165                  | 18.7             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5626.00        | 55.4 PK                 | 68.2           | -12.8       | 1.57 V             | 266                  | 40.1             | 15.3                     |
| 2                                                    | *5785.00        | 122.9 PK                |                |             | 1.57 V             | 266                  | 108.0            | 14.9                     |
| 3                                                    | *5785.00        | 114.5 AV                |                |             | 1.57 V             | 266                  | 99.6             | 14.9                     |
| 4                                                    | #5945.68        | 57.1 PK                 | 68.2           | -11.1       | 1.57 V             | 266                  | 41.8             | 15.3                     |
| 5                                                    | 11570.00        | 63.7 PK                 | 74.0           | -10.3       | 1.81 V             | 53                   | 35.6             | 28.1                     |
| 6                                                    | 11570.00        | 47.9 AV                 | 54.0           | -6.1        | 1.81 V             | 53                   | 19.8             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 165 : 5825 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5574.23        | 55.6 PK                 | 68.2           | -12.6       | 2.23 H             | 204                  | 40.1             | 15.5                     |
| 2                                                    | *5825.00        | 114.2 PK                |                |             | 2.23 H             | 204                  | 99.3             | 14.9                     |
| 3                                                    | *5825.00        | 107.1 AV                |                |             | 2.23 H             | 204                  | 92.2             | 14.9                     |
| 4                                                    | #5965.15        | 56.2 PK                 | 68.2           | -12.0       | 2.23 H             | 204                  | 41.1             | 15.1                     |
| 5                                                    | 11650.00        | 62.3 PK                 | 74.0           | -11.7       | 1.90 H             | 163                  | 34.1             | 28.2                     |
| 6                                                    | 11650.00        | 46.5 AV                 | 54.0           | -7.5        | 1.90 H             | 163                  | 18.3             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5602.73        | 55.5 PK                 | 68.2           | -12.7       | 1.51 V             | 276                  | 40.3             | 15.2                     |
| 2                                                    | *5825.00        | 122.5 PK                |                |             | 1.51 V             | 276                  | 107.6            | 14.9                     |
| 3                                                    | *5825.00        | 115.3 AV                |                |             | 1.51 V             | 276                  | 100.4            | 14.9                     |
| 4                                                    | #5941.87        | 58.1 PK                 | 68.2           | -10.1       | 1.51 V             | 276                  | 42.9             | 15.2                     |
| 5                                                    | 11650.00        | 63.4 PK                 | 74.0           | -10.6       | 1.75 V             | 63                   | 35.2             | 28.2                     |
| 6                                                    | 11650.00        | 47.6 AV                 | 54.0           | -6.4        | 1.75 V             | 63                   | 19.4             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 36 : 5180 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.4 PK                 | 74.0           | -18.6       | 2.05 H             | 222                  | 41.6             | 13.8                     |
| 2                                                    | 5150.00         | 44.7 AV                 | 54.0           | -9.3        | 2.05 H             | 222                  | 30.9             | 13.8                     |
| 3                                                    | *5180.00        | 100.3 PK                |                |             | 2.05 H             | 222                  | 86.3             | 14.0                     |
| 4                                                    | *5180.00        | 91.0 AV                 |                |             | 2.05 H             | 222                  | 77.0             | 14.0                     |
| 5                                                    | #10360.00       | 60.5 PK                 | 68.2           | -7.7        | 1.72 H             | 181                  | 34.7             | 25.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.8 PK                 | 74.0           | -18.2       | 1.33 V             | 282                  | 42.0             | 13.8                     |
| 2                                                    | 5150.00         | 45.2 AV                 | 54.0           | -8.8        | 1.33 V             | 282                  | 31.4             | 13.8                     |
| 3                                                    | *5180.00        | 111.6 PK                |                |             | 1.33 V             | 282                  | 97.6             | 14.0                     |
| 4                                                    | *5180.00        | 102.1 AV                |                |             | 1.33 V             | 282                  | 88.1             | 14.0                     |
| 5                                                    | #10360.00       | 61.6 PK                 | 68.2           | -6.6        | 1.58 V             | 69                   | 35.8             | 25.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 40 : 5200 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 107.4 PK                |                |             | 2.58 H             | 23                   | 93.3             | 14.1                     |
| 2                                                    | *5200.00        | 95.6 AV                 |                |             | 2.58 H             | 23                   | 81.5             | 14.1                     |
| 3                                                    | #10400.00       | 61.4 PK                 | 68.2           | -6.8        | 2.33 H             | 332                  | 35.3             | 26.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 117.0 PK                |                |             | 1.62 V             | 98                   | 102.9            | 14.1                     |
| 2                                                    | *5200.00        | 105.5 AV                |                |             | 1.62 V             | 98                   | 91.4             | 14.1                     |
| 3                                                    | #10400.00       | 62.2 PK                 | 68.2           | -6.0        | 1.84 V             | 265                  | 36.1             | 26.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 48 : 5240 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 108.2 PK                |                |             | 2.14 H             | 221                  | 92.6             | 15.6                     |
| 2                                                    | *5240.00        | 97.9 AV                 |                |             | 2.14 H             | 221                  | 82.3             | 15.6                     |
| 3                                                    | 5350.00         | 55.4 PK                 | 74.0           | -18.6       | 2.14 H             | 221                  | 40.4             | 15.0                     |
| 4                                                    | 5350.00         | 44.2 AV                 | 54.0           | -9.8        | 2.14 H             | 221                  | 29.2             | 15.0                     |
| 5                                                    | #10480.00       | 60.5 PK                 | 68.2           | -7.7        | 1.81 H             | 180                  | 34.2             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 116.5 PK                |                |             | 1.42 V             | 281                  | 102.1            | 14.4                     |
| 2                                                    | *5240.00        | 106.4 AV                |                |             | 1.42 V             | 281                  | 92.0             | 14.4                     |
| 3                                                    | 5350.00         | 55.6 PK                 | 74.0           | -18.4       | 1.42 V             | 281                  | 40.6             | 15.0                     |
| 4                                                    | 5350.00         | 44.5 AV                 | 54.0           | -9.5        | 1.42 V             | 281                  | 29.5             | 15.0                     |
| 5                                                    | #10480.00       | 61.6 PK                 | 68.2           | -6.6        | 1.67 V             | 46                   | 35.3             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 52 : 5260 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.3 PK                 | 74.0           | -19.7       | 2.22 H             | 211                  | 40.5             | 13.8                     |
| 2                                                    | 5150.00         | 43.8 AV                 | 54.0           | -10.2       | 2.22 H             | 211                  | 30.0             | 13.8                     |
| 3                                                    | *5260.00        | 106.1 PK                |                |             | 2.22 H             | 211                  | 91.4             | 14.7                     |
| 4                                                    | *5260.00        | 96.6 AV                 |                |             | 2.22 H             | 211                  | 81.9             | 14.7                     |
| 5                                                    | #10520.00       | 61.3 PK                 | 68.2           | -6.9        | 1.89 H             | 168                  | 35.0             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.7 PK                 | 74.0           | -19.3       | 1.54 V             | 278                  | 40.9             | 13.8                     |
| 2                                                    | 5150.00         | 44.0 AV                 | 54.0           | -10.0       | 1.54 V             | 278                  | 30.2             | 13.8                     |
| 3                                                    | *5260.00        | 116.6 PK                |                |             | 1.54 V             | 278                  | 101.9            | 14.7                     |
| 4                                                    | *5260.00        | 106.9 AV                |                |             | 1.54 V             | 278                  | 92.2             | 14.7                     |
| 5                                                    | #10520.00       | 62.4 PK                 | 68.2           | -5.8        | 1.79 V             | 73                   | 36.1             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 60 : 5300 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 106.0 PK                |                |             | 2.52 H             | 11                   | 91.0             | 15.0                     |
| 2                                                    | *5300.00        | 96.1 AV                 |                |             | 2.52 H             | 11                   | 81.1             | 15.0                     |
| 3                                                    | 10600.00        | 61.8 PK                 | 74.0           | -12.2       | 1.36 H             | 230                  | 35.1             | 26.7                     |
| 4                                                    | 10600.00        | 45.7 AV                 | 54.0           | -8.3        | 1.36 H             | 230                  | 19.0             | 26.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 115.9 PK                |                |             | 1.66 V             | 103                  | 100.9            | 15.0                     |
| 2                                                    | *5300.00        | 106.0 AV                |                |             | 1.66 V             | 103                  | 91.0             | 15.0                     |
| 3                                                    | 10600.00        | 62.8 PK                 | 74.0           | -11.2       | 1.87 V             | 145                  | 36.1             | 26.7                     |
| 4                                                    | 10600.00        | 46.8 AV                 | 54.0           | -7.2        | 1.87 V             | 145                  | 20.1             | 26.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 64 : 5320 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 101.8 PK                |                |             | 2.08 H             | 198                  | 86.9             | 14.9                     |
| 2                                                    | *5320.00        | 92.6 AV                 |                |             | 2.08 H             | 198                  | 77.7             | 14.9                     |
| 3                                                    | 5350.00         | 55.5 PK                 | 74.0           | -18.5       | 2.08 H             | 198                  | 40.5             | 15.0                     |
| 4                                                    | 5350.00         | 45.8 AV                 | 54.0           | -8.2        | 2.08 H             | 198                  | 30.8             | 15.0                     |
| 5                                                    | 10640.00        | 61.3 PK                 | 74.0           | -12.7       | 1.75 H             | 155                  | 34.4             | 26.9                     |
| 6                                                    | 10640.00        | 45.2 AV                 | 54.0           | -8.8        | 1.75 H             | 155                  | 18.3             | 26.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 112.2 PK                |                |             | 1.40 V             | 265                  | 97.3             | 14.9                     |
| 2                                                    | *5320.00        | 103.5 AV                |                |             | 1.40 V             | 265                  | 88.6             | 14.9                     |
| 3                                                    | 5350.00         | 55.8 PK                 | 74.0           | -18.2       | 1.40 V             | 265                  | 40.8             | 15.0                     |
| 4                                                    | 5350.00         | 46.1 AV                 | 54.0           | -7.9        | 1.40 V             | 265                  | 31.1             | 15.0                     |
| 5                                                    | 10640.00        | 62.4 PK                 | 74.0           | -11.6       | 1.65 V             | 60                   | 35.5             | 26.9                     |
| 6                                                    | 10640.00        | 46.3 AV                 | 54.0           | -7.7        | 1.65 V             | 60                   | 19.4             | 26.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 100 : 5500 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 55.5 PK                 | 74.0           | -18.5       | 2.23 H             | 209                  | 40.2             | 15.3                     |
| 2                                                    | 5460.00         | 44.7 AV                 | 54.0           | -9.3        | 2.23 H             | 209                  | 29.4             | 15.3                     |
| 3                                                    | #5470.00        | 55.6 PK                 | 68.2           | -12.6       | 2.23 H             | 209                  | 40.2             | 15.4                     |
| 4                                                    | *5500.00        | 103.0 PK                |                |             | 2.23 H             | 209                  | 87.5             | 15.5                     |
| 5                                                    | *5500.00        | 92.4 AV                 |                |             | 2.23 H             | 209                  | 76.9             | 15.5                     |
| 6                                                    | 11000.00        | 62.0 PK                 | 74.0           | -12.0       | 1.90 H             | 166                  | 34.8             | 27.2                     |
| 7                                                    | 11000.00        | 45.9 AV                 | 54.0           | -8.1        | 1.90 H             | 166                  | 18.7             | 27.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 55.7 PK                 | 74.0           | -18.3       | 1.55 V             | 276                  | 40.4             | 15.3                     |
| 2                                                    | 5460.00         | 44.9 AV                 | 54.0           | -9.1        | 1.55 V             | 276                  | 29.6             | 15.3                     |
| 3                                                    | #5470.00        | 56.3 PK                 | 68.2           | -11.9       | 1.55 V             | 276                  | 40.9             | 15.4                     |
| 4                                                    | *5500.00        | 113.2 PK                |                |             | 1.55 V             | 276                  | 97.7             | 15.5                     |
| 5                                                    | *5500.00        | 102.8 AV                |                |             | 1.55 V             | 276                  | 87.3             | 15.5                     |
| 6                                                    | 11000.00        | 63.1 PK                 | 74.0           | -10.9       | 1.80 V             | 71                   | 35.9             | 27.2                     |
| 7                                                    | 11000.00        | 47.0 AV                 | 54.0           | -7.0        | 1.80 V             | 71                   | 19.8             | 27.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 116 : 5580 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 107.8 PK                |                |             | 2.44 H             | 23                   | 92.4             | 15.4                     |
| 2                                                    | *5580.00        | 95.8 AV                 |                |             | 2.44 H             | 23                   | 80.4             | 15.4                     |
| 3                                                    | 11160.00        | 63.2 PK                 | 74.0           | -10.8       | 1.89 H             | 228                  | 35.1             | 28.1                     |
| 4                                                    | 11160.00        | 47.3 AV                 | 54.0           | -6.7        | 1.89 H             | 228                  | 19.2             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 117.9 PK                |                |             | 1.61 V             | 105                  | 102.5            | 15.4                     |
| 2                                                    | *5580.00        | 106.3 AV                |                |             | 1.61 V             | 105                  | 90.9             | 15.4                     |
| 3                                                    | 11160.00        | 64.3 PK                 | 74.0           | -9.7        | 2.25 V             | 154                  | 36.2             | 28.1                     |
| 4                                                    | 11160.00        | 48.1 AV                 | 54.0           | -5.9        | 2.25 V             | 154                  | 20.0             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 140 : 5700 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 101.1 PK                |                |             | 2.26 H             | 205                  | 86.0             | 15.1                     |
| 2                                                    | *5700.00        | 91.9 AV                 |                |             | 2.26 H             | 205                  | 76.8             | 15.1                     |
| 3                                                    | #5725.00        | 55.9 PK                 | 68.2           | -12.3       | 2.26 H             | 205                  | 40.8             | 15.1                     |
| 4                                                    | 11400.00        | 61.4 PK                 | 74.0           | -12.6       | 1.93 H             | 162                  | 33.4             | 28.0                     |
| 5                                                    | 11400.00        | 45.3 AV                 | 54.0           | -8.7        | 1.93 H             | 162                  | 17.3             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 111.4 PK                |                |             | 1.58 V             | 272                  | 96.3             | 15.1                     |
| 2                                                    | *5700.00        | 101.9 AV                |                |             | 1.58 V             | 272                  | 86.8             | 15.1                     |
| 3                                                    | #5725.00        | 56.7 PK                 | 68.2           | -11.5       | 1.58 V             | 272                  | 41.6             | 15.1                     |
| 4                                                    | 11400.00        | 62.5 PK                 | 74.0           | -11.5       | 1.83 V             | 67                   | 34.5             | 28.0                     |
| 5                                                    | 11400.00        | 46.4 AV                 | 54.0           | -7.6        | 1.83 V             | 67                   | 18.4             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 144 : 5720 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.4 PK                 | 68.2           | -11.8       | 2.27 H             | 203                  | 41.0             | 15.4                     |
| 2                                                    | *5720.00        | 108.3 PK                |                |             | 2.27 H             | 203                  | 93.2             | 15.1                     |
| 3                                                    | *5720.00        | 98.9 AV                 |                |             | 2.27 H             | 203                  | 83.8             | 15.1                     |
| 4                                                    | 11440.00        | 63.3 PK                 | 74.0           | -10.7       | 1.94 H             | 160                  | 35.4             | 27.9                     |
| 5                                                    | 11440.00        | 47.5 AV                 | 54.0           | -6.5        | 1.94 H             | 160                  | 19.6             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.7 PK                 | 68.2           | -11.5       | 1.59 V             | 270                  | 41.3             | 15.4                     |
| 2                                                    | *5720.00        | 118.7 PK                |                |             | 1.59 V             | 270                  | 103.6            | 15.1                     |
| 3                                                    | *5720.00        | 109.2 AV                |                |             | 1.59 V             | 270                  | 94.1             | 15.1                     |
| 4                                                    | 11440.00        | 64.4 PK                 | 74.0           | -9.6        | 1.83 V             | 65                   | 36.5             | 27.9                     |
| 5                                                    | 11440.00        | 48.6 AV                 | 54.0           | -5.4        | 1.83 V             | 65                   | 20.7             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 149 : 5745 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5569.00        | 55.1 PK                 | 68.2           | -13.1       | 2.26 H             | 193                  | 39.6             | 15.5                     |
| 2                                                    | *5745.00        | 112.1 PK                |                |             | 2.26 H             | 193                  | 97.0             | 15.1                     |
| 3                                                    | *5745.00        | 103.5 AV                |                |             | 2.26 H             | 193                  | 88.4             | 15.1                     |
| 4                                                    | #6004.10        | 56.3 PK                 | 68.2           | -11.9       | 2.26 H             | 193                  | 41.2             | 15.1                     |
| 5                                                    | 11490.00        | 63.2 PK                 | 74.0           | -10.8       | 1.93 H             | 150                  | 35.3             | 27.9                     |
| 6                                                    | 11490.00        | 47.5 AV                 | 54.0           | -6.5        | 1.93 H             | 150                  | 19.6             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5607.48        | 55.2 PK                 | 68.2           | -13.0       | 1.58 V             | 270                  | 40.0             | 15.2                     |
| 2                                                    | *5745.00        | 121.5 PK                |                |             | 1.58 V             | 270                  | 106.4            | 15.1                     |
| 3                                                    | *5745.00        | 113.1 AV                |                |             | 1.58 V             | 270                  | 98.0             | 15.1                     |
| 4                                                    | #6005.52        | 56.1 PK                 | 68.2           | -12.1       | 1.58 V             | 270                  | 41.0             | 15.1                     |
| 5                                                    | 11490.00        | 64.3 PK                 | 74.0           | -9.7        | 1.83 V             | 65                   | 36.4             | 27.9                     |
| 6                                                    | 11490.00        | 48.6 AV                 | 54.0           | -5.4        | 1.83 V             | 65                   | 20.7             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 157 : 5785 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                   |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5647.72        | 51.4 PK                 | 68.2           | -16.8       | 2.58 H             | 25                   | 40.0             | 11.4                     |
| 2                                                    | *5785.00        | 110.6 PK                |                |             | 2.58 H             | 25                   | 95.7             | 14.9                     |
| 3                                                    | *5785.00        | 100.5 AV                |                |             | 2.58 H             | 25                   | 85.6             | 14.9                     |
| 4                                                    | #5938.25        | 50.9 PK                 | 68.2           | -17.3       | 2.58 H             | 25                   | 39.8             | 11.1                     |
| 5                                                    | 11570.00        | 63.5 PK                 | 74.0           | -10.5       | 1.63 H             | 229                  | 35.4             | 28.1                     |
| 6                                                    | 11570.00        | 47.4 AV                 | 54.0           | -6.6        | 1.63 H             | 229                  | 19.3             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5637.74        | 55.3 PK                 | 68.2           | -12.9       | 1.58 V             | 88                   | 40.1             | 15.2                     |
| 2                                                    | *5785.00        | 120.3 PK                |                |             | 1.58 V             | 88                   | 105.4            | 14.9                     |
| 3                                                    | *5785.00        | 110.3 AV                |                |             | 1.58 V             | 88                   | 95.4             | 14.9                     |
| 4                                                    | #5942.91        | 55.0 PK                 | 68.2           | -13.2       | 1.58 V             | 88                   | 39.7             | 15.3                     |
| 5                                                    | 11570.00        | 64.3 PK                 | 74.0           | -9.7        | 2.21 V             | 146                  | 36.2             | 28.1                     |
| 6                                                    | 11570.00        | 48.6 AV                 | 54.0           | -5.4        | 2.21 V             | 146                  | 20.5             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 165 : 5825 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5554.75        | 55.6 PK                 | 68.2           | -12.6       | 2.12 H             | 203                  | 40.0             | 15.6                     |
| 2                                                    | *5825.00        | 110.2 PK                |                |             | 2.12 H             | 203                  | 95.3             | 14.9                     |
| 3                                                    | *5825.00        | 102.0 AV                |                |             | 2.12 H             | 203                  | 87.1             | 14.9                     |
| 4                                                    | #6015.02        | 55.6 PK                 | 68.2           | -12.6       | 2.12 H             | 203                  | 40.4             | 15.2                     |
| 5                                                    | 11650.00        | 63.6 PK                 | 74.0           | -10.4       | 1.79 H             | 160                  | 35.4             | 28.2                     |
| 6                                                    | 11650.00        | 47.9 AV                 | 54.0           | -6.1        | 1.79 H             | 160                  | 19.7             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5611.27        | 56.1 PK                 | 68.2           | -12.1       | 1.44 V             | 270                  | 40.9             | 15.2                     |
| 2                                                    | *5825.00        | 120.6 PK                |                |             | 1.44 V             | 270                  | 105.7            | 14.9                     |
| 3                                                    | *5825.00        | 112.6 AV                |                |             | 1.44 V             | 270                  | 97.7             | 14.9                     |
| 4                                                    | #6023.57        | 56.2 PK                 | 68.2           | -12.0       | 1.44 V             | 270                  | 40.9             | 15.3                     |
| 5                                                    | 11650.00        | 64.7 PK                 | 74.0           | -9.3        | 1.69 V             | 65                   | 36.5             | 28.2                     |
| 6                                                    | 11650.00        | 49.0 AV                 | 54.0           | -5.0        | 1.69 V             | 65                   | 20.8             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 36 : 5180 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.7 PK                 | 74.0           | -19.3       | 1.96 H             | 205                  | 40.9             | 13.8                     |
| 2                                                    | 5150.00         | 43.7 AV                 | 54.0           | -10.3       | 1.96 H             | 205                  | 29.9             | 13.8                     |
| 3                                                    | *5180.00        | 102.9 PK                |                |             | 1.96 H             | 205                  | 88.9             | 14.0                     |
| 4                                                    | *5180.00        | 92.5 AV                 |                |             | 1.96 H             | 205                  | 78.5             | 14.0                     |
| 5                                                    | #10360.00       | 61.0 PK                 | 68.2           | -7.2        | 1.63 H             | 162                  | 35.2             | 25.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 60.0 PK                 | 74.0           | -14.0       | 1.28 V             | 272                  | 46.2             | 13.8                     |
| 2                                                    | 5150.00         | 45.9 AV                 | 54.0           | -8.1        | 1.28 V             | 272                  | 32.1             | 13.8                     |
| 3                                                    | *5180.00        | 113.1 PK                |                |             | 1.28 V             | 272                  | 99.1             | 14.0                     |
| 4                                                    | *5180.00        | 102.3 AV                |                |             | 1.28 V             | 272                  | 88.3             | 14.0                     |
| 5                                                    | #10360.00       | 62.1 PK                 | 68.2           | -6.1        | 1.53 V             | 67                   | 36.3             | 25.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 40 : 5200 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 106.1 PK                |                |             | 2.45 H             | 18                   | 92.0             | 14.1                     |
| 2                                                    | *5200.00        | 96.3 AV                 |                |             | 2.45 H             | 18                   | 82.2             | 14.1                     |
| 3                                                    | #10400.00       | 61.1 PK                 | 68.2           | -7.1        | 1.24 H             | 159                  | 35.0             | 26.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 116.6 PK                |                |             | 1.63 V             | 99                   | 102.5            | 14.1                     |
| 2                                                    | *5200.00        | 106.1 AV                |                |             | 1.63 V             | 99                   | 92.0             | 14.1                     |
| 3                                                    | #10400.00       | 62.4 PK                 | 68.2           | -5.8        | 1.74 V             | 158                  | 36.3             | 26.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 48 : 5240 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 106.5 PK                |                |             | 1.78 H             | 206                  | 92.1             | 14.4                     |
| 2                                                    | *5240.00        | 96.8 AV                 |                |             | 1.78 H             | 206                  | 82.4             | 14.4                     |
| 3                                                    | 5350.00         | 55.5 PK                 | 74.0           | -18.5       | 1.78 H             | 206                  | 40.5             | 15.0                     |
| 4                                                    | 5350.00         | 44.8 AV                 | 54.0           | -9.2        | 1.78 H             | 206                  | 29.8             | 15.0                     |
| 5                                                    | #10480.00       | 61.2 PK                 | 68.2           | -7.0        | 1.45 H             | 163                  | 34.9             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 116.6 PK                |                |             | 1.10 V             | 273                  | 102.2            | 14.4                     |
| 2                                                    | *5240.00        | 107.1 AV                |                |             | 1.10 V             | 273                  | 92.7             | 14.4                     |
| 3                                                    | 5350.00         | 55.9 PK                 | 74.0           | -18.1       | 1.10 V             | 273                  | 40.9             | 15.0                     |
| 4                                                    | 5350.00         | 45.1 AV                 | 54.0           | -8.9        | 1.10 V             | 273                  | 30.1             | 15.0                     |
| 5                                                    | #10480.00       | 62.3 PK                 | 68.2           | -5.9        | 1.35 V             | 68                   | 36.0             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 52 : 5260 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 57.7 PK                 | 74.0           | -16.3       | 2.49 H             | 15                   | 43.9             | 13.8                     |
| 2                                                    | 5150.00         | 46.0 AV                 | 54.0           | -8.0        | 2.49 H             | 15                   | 32.2             | 13.8                     |
| 3                                                    | *5260.00        | 107.9 PK                |                |             | 2.49 H             | 15                   | 93.2             | 14.7                     |
| 4                                                    | *5260.00        | 97.5 AV                 |                |             | 2.49 H             | 15                   | 82.8             | 14.7                     |
| 5                                                    | #10520.00       | 61.6 PK                 | 68.2           | -6.6        | 1.88 H             | 145                  | 35.3             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 58.7 PK                 | 74.0           | -15.3       | 1.56 V             | 96                   | 44.9             | 13.8                     |
| 2                                                    | 5150.00         | 47.2 AV                 | 54.0           | -6.8        | 1.56 V             | 96                   | 33.4             | 13.8                     |
| 3                                                    | *5260.00        | 117.6 PK                |                |             | 1.56 V             | 96                   | 102.9            | 14.7                     |
| 4                                                    | *5260.00        | 107.3 AV                |                |             | 1.56 V             | 96                   | 92.6             | 14.7                     |
| 5                                                    | #10520.00       | 62.5 PK                 | 68.2           | -5.7        | 1.84 V             | 166                  | 36.2             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 60 : 5300 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 106.9 PK                |                |             | 2.20 H             | 202                  | 91.9             | 15.0                     |
| 2                                                    | *5300.00        | 96.1 AV                 |                |             | 2.20 H             | 202                  | 81.1             | 15.0                     |
| 3                                                    | 10600.00        | 61.2 PK                 | 74.0           | -12.8       | 1.87 H             | 159                  | 34.5             | 26.7                     |
| 4                                                    | 10600.00        | 45.1 AV                 | 54.0           | -8.9        | 1.87 H             | 159                  | 18.4             | 26.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 117.3 PK                |                |             | 1.52 V             | 269                  | 102.3            | 15.0                     |
| 2                                                    | *5300.00        | 107.0 AV                |                |             | 1.52 V             | 269                  | 92.0             | 15.0                     |
| 3                                                    | 10600.00        | 62.3 PK                 | 74.0           | -11.7       | 1.87 V             | 64                   | 35.6             | 26.7                     |
| 4                                                    | 10600.00        | 46.2 AV                 | 54.0           | -7.8        | 1.87 V             | 64                   | 19.5             | 26.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 64 : 5320 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 102.3 PK                |                |             | 2.01 H             | 205                  | 87.4             | 14.9                     |
| 2                                                    | *5320.00        | 92.0 AV                 |                |             | 2.01 H             | 205                  | 77.1             | 14.9                     |
| 3                                                    | 5350.00         | 55.2 PK                 | 74.0           | -18.8       | 2.01 H             | 205                  | 40.2             | 15.0                     |
| 4                                                    | 5350.00         | 44.7 AV                 | 54.0           | -9.3        | 2.01 H             | 205                  | 29.7             | 15.0                     |
| 5                                                    | 10640.00        | 60.6 PK                 | 74.0           | -13.4       | 1.68 H             | 162                  | 33.7             | 26.9                     |
| 6                                                    | 10640.00        | 44.5 AV                 | 54.0           | -9.5        | 1.68 H             | 162                  | 17.6             | 26.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 113.4 PK                |                |             | 1.33 V             | 272                  | 98.5             | 14.9                     |
| 2                                                    | *5320.00        | 102.1 AV                |                |             | 1.33 V             | 272                  | 87.2             | 14.9                     |
| 3                                                    | 5350.00         | 58.1 PK                 | 74.0           | -15.9       | 1.33 V             | 272                  | 43.1             | 15.0                     |
| 4                                                    | 5350.00         | 45.7 AV                 | 54.0           | -8.3        | 1.33 V             | 272                  | 30.7             | 15.0                     |
| 5                                                    | 10640.00        | 61.7 PK                 | 74.0           | -12.3       | 1.58 V             | 67                   | 34.8             | 26.9                     |
| 6                                                    | 10640.00        | 45.6 AV                 | 54.0           | -8.4        | 1.58 V             | 67                   | 18.7             | 26.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 100 : 5500 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 55.7 PK                 | 74.0           | -18.3       | 1.95 H             | 191                  | 40.4             | 15.3                     |
| 2                                                    | 5460.00         | 45.1 AV                 | 54.0           | -8.9        | 1.95 H             | 191                  | 29.8             | 15.3                     |
| 3                                                    | #5470.00        | 55.9 PK                 | 68.2           | -12.3       | 1.95 H             | 191                  | 40.5             | 15.4                     |
| 4                                                    | *5500.00        | 101.3 PK                |                |             | 1.95 H             | 191                  | 85.8             | 15.5                     |
| 5                                                    | *5500.00        | 91.4 AV                 |                |             | 1.95 H             | 191                  | 75.9             | 15.5                     |
| 6                                                    | 11000.00        | 60.3 PK                 | 74.0           | -13.7       | 1.62 H             | 148                  | 33.1             | 27.2                     |
| 7                                                    | 11000.00        | 44.2 AV                 | 54.0           | -9.8        | 1.62 H             | 148                  | 17.0             | 27.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 56.5 PK                 | 74.0           | -17.5       | 1.28 V             | 272                  | 41.2             | 15.3                     |
| 2                                                    | 5460.00         | 45.3 AV                 | 54.0           | -8.7        | 1.28 V             | 272                  | 30.0             | 15.3                     |
| 3                                                    | #5470.00        | 56.8 PK                 | 68.2           | -11.4       | 1.28 V             | 272                  | 41.4             | 15.4                     |
| 4                                                    | *5500.00        | 111.5 PK                |                |             | 1.28 V             | 272                  | 96.0             | 15.5                     |
| 5                                                    | *5500.00        | 101.7 AV                |                |             | 1.28 V             | 272                  | 86.2             | 15.5                     |
| 6                                                    | 11000.00        | 61.4 PK                 | 74.0           | -12.6       | 1.42 V             | 68                   | 34.2             | 27.2                     |
| 7                                                    | 11000.00        | 45.3 AV                 | 54.0           | -8.7        | 1.42 V             | 68                   | 18.1             | 27.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 116 : 5580 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 107.9 PK                |                |             | 2.52 H             | 16                   | 92.5             | 15.4                     |
| 2                                                    | *5580.00        | 96.8 AV                 |                |             | 2.52 H             | 16                   | 81.4             | 15.4                     |
| 3                                                    | 11160.00        | 63.3 PK                 | 74.0           | -10.7       | 2.03 H             | 155                  | 35.2             | 28.1                     |
| 4                                                    | 11160.00        | 47.3 AV                 | 54.0           | -6.7        | 2.03 H             | 155                  | 19.2             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 117.5 PK                |                |             | 1.61 V             | 106                  | 102.1            | 15.4                     |
| 2                                                    | *5580.00        | 106.9 AV                |                |             | 1.61 V             | 106                  | 91.5             | 15.4                     |
| 3                                                    | 11160.00        | 64.4 PK                 | 74.0           | -9.6        | 1.23 V             | 226                  | 36.3             | 28.1                     |
| 4                                                    | 11160.00        | 48.4 AV                 | 54.0           | -5.6        | 1.23 V             | 226                  | 20.3             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 140 : 5700 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 101.8 PK                |                |             | 2.06 H             | 191                  | 86.7             | 15.1                     |
| 2                                                    | *5700.00        | 91.7 AV                 |                |             | 2.06 H             | 191                  | 76.6             | 15.1                     |
| 3                                                    | #5725.00        | 56.0 PK                 | 68.2           | -12.2       | 2.06 H             | 191                  | 40.9             | 15.1                     |
| 4                                                    | 11400.00        | 62.2 PK                 | 74.0           | -11.8       | 1.73 H             | 148                  | 34.2             | 28.0                     |
| 5                                                    | 11400.00        | 46.1 AV                 | 54.0           | -7.9        | 1.73 H             | 148                  | 18.1             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 112.2 PK                |                |             | 1.38 V             | 272                  | 97.1             | 15.1                     |
| 2                                                    | *5700.00        | 102.0 AV                |                |             | 1.38 V             | 272                  | 86.9             | 15.1                     |
| 3                                                    | #5725.00        | 56.6 PK                 | 68.2           | -11.6       | 1.38 V             | 272                  | 41.5             | 15.1                     |
| 4                                                    | 11400.00        | 63.3 PK                 | 74.0           | -10.7       | 1.63 V             | 53                   | 35.3             | 28.0                     |
| 5                                                    | 11400.00        | 47.2 AV                 | 54.0           | -6.8        | 1.63 V             | 53                   | 19.2             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 144 : 5720 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.2 PK                 | 68.2           | -12.0       | 2.01 H             | 191                  | 40.8             | 15.4                     |
| 2                                                    | *5720.00        | 108.5 PK                |                |             | 2.01 H             | 191                  | 93.4             | 15.1                     |
| 3                                                    | *5720.00        | 99.6 AV                 |                |             | 2.01 H             | 191                  | 84.5             | 15.1                     |
| 4                                                    | 11440.00        | 63.4 PK                 | 74.0           | -10.6       | 1.68 H             | 148                  | 35.5             | 27.9                     |
| 5                                                    | 11440.00        | 47.6 AV                 | 54.0           | -6.4        | 1.68 H             | 148                  | 19.7             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 58.7 PK                 | 68.2           | -9.5        | 1.47 V             | 272                  | 43.3             | 15.4                     |
| 2                                                    | *5720.00        | 118.8 PK                |                |             | 1.47 V             | 272                  | 103.7            | 15.1                     |
| 3                                                    | *5720.00        | 109.2 AV                |                |             | 1.47 V             | 272                  | 94.1             | 15.1                     |
| 4                                                    | 11440.00        | 64.5 PK                 | 74.0           | -9.5        | 2.14 V             | 203                  | 36.6             | 27.9                     |
| 5                                                    | 11440.00        | 48.7 AV                 | 54.0           | -5.3        | 2.14 V             | 203                  | 20.8             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 149 : 5745 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 20.9 °C, 70.3 % RH                                                   |
| <b>Tested By</b>       | Ian Chang                    |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5645.08        | 54.9 PK                 | 68.2           | -13.3       | 2.34 H             | 22                   | 39.7             | 15.2                     |
| 2                                                    | *5745.00        | 111.3 PK                |                |             | 2.34 H             | 22                   | 96.2             | 15.1                     |
| 3                                                    | *5745.00        | 100.4 AV                |                |             | 2.34 H             | 22                   | 85.3             | 15.1                     |
| 4                                                    | #5934.09        | 54.4 PK                 | 68.2           | -13.8       | 2.34 H             | 22                   | 39.2             | 15.2                     |
| 5                                                    | 11490.00        | 63.2 PK                 | 74.0           | -10.8       | 1.96 H             | 241                  | 35.3             | 27.9                     |
| 6                                                    | 11490.00        | 47.2 AV                 | 54.0           | -6.8        | 1.96 H             | 241                  | 19.3             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5636.24        | 56.0 PK                 | 68.2           | -12.2       | 1.56 V             | 108                  | 40.7             | 15.3                     |
| 2                                                    | *5745.00        | 121.4 PK                |                |             | 1.56 V             | 108                  | 106.3            | 15.1                     |
| 3                                                    | *5745.00        | 110.6 AV                |                |             | 1.56 V             | 108                  | 95.5             | 15.1                     |
| 4                                                    | #5935.08        | 54.9 PK                 | 68.2           | -13.3       | 1.56 V             | 108                  | 39.7             | 15.2                     |
| 5                                                    | 11490.00        | 64.1 PK                 | 74.0           | -9.9        | 2.37 V             | 184                  | 36.2             | 27.9                     |
| 6                                                    | 11490.00        | 48.3 AV                 | 54.0           | -5.7        | 2.37 V             | 184                  | 20.4             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 157 : 5785 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5597.98        | 55.5 PK                 | 68.2           | -12.7       | 2.09 H             | 204                  | 40.2             | 15.3                     |
| 2                                                    | *5785.00        | 109.9 PK                |                |             | 2.09 H             | 204                  | 95.0             | 14.9                     |
| 3                                                    | *5785.00        | 101.0 AV                |                |             | 2.09 H             | 204                  | 86.1             | 14.9                     |
| 4                                                    | #5939.02        | 56.2 PK                 | 68.2           | -12.0       | 2.09 H             | 204                  | 41.0             | 15.2                     |
| 5                                                    | 11570.00        | 62.3 PK                 | 74.0           | -11.7       | 1.74 H             | 161                  | 34.2             | 28.1                     |
| 6                                                    | 11570.00        | 46.5 AV                 | 54.0           | -7.5        | 1.74 H             | 161                  | 18.4             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5603.20        | 55.5 PK                 | 68.2           | -12.7       | 1.41 V             | 271                  | 40.3             | 15.2                     |
| 2                                                    | *5785.00        | 120.3 PK                |                |             | 1.41 V             | 271                  | 105.4            | 14.9                     |
| 3                                                    | *5785.00        | 110.9 AV                |                |             | 1.41 V             | 271                  | 96.0             | 14.9                     |
| 4                                                    | #5952.80        | 56.6 PK                 | 68.2           | -11.6       | 1.41 V             | 271                  | 41.4             | 15.2                     |
| 5                                                    | 11570.00        | 63.4 PK                 | 74.0           | -10.6       | 1.66 V             | 66                   | 35.3             | 28.1                     |
| 6                                                    | 11570.00        | 47.6 AV                 | 54.0           | -6.4        | 1.66 V             | 66                   | 19.5             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 165 : 5825 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5559.98        | 55.8 PK                 | 68.2           | -12.4       | 2.09 H             | 202                  | 40.2             | 15.6                     |
| 2                                                    | *5825.00        | 110.9 PK                |                |             | 2.09 H             | 202                  | 96.0             | 14.9                     |
| 3                                                    | *5825.00        | 100.8 AV                |                |             | 2.09 H             | 202                  | 85.9             | 14.9                     |
| 4                                                    | #5983.68        | 56.0 PK                 | 68.2           | -12.2       | 2.09 H             | 202                  | 40.9             | 15.1                     |
| 5                                                    | 11650.00        | 63.5 PK                 | 74.0           | -10.5       | 1.74 H             | 159                  | 35.3             | 28.2                     |
| 6                                                    | 11650.00        | 47.7 AV                 | 54.0           | -6.3        | 1.74 H             | 159                  | 19.5             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5578.50        | 55.4 PK                 | 68.2           | -12.8       | 1.41 V             | 269                  | 40.0             | 15.4                     |
| 2                                                    | *5825.00        | 121.4 PK                |                |             | 1.41 V             | 269                  | 106.5            | 14.9                     |
| 3                                                    | *5825.00        | 111.3 AV                |                |             | 1.41 V             | 269                  | 96.4             | 14.9                     |
| 4                                                    | #5926.68        | 57.2 PK                 | 68.2           | -11.0       | 1.41 V             | 269                  | 42.0             | 15.2                     |
| 5                                                    | 11650.00        | 64.6 PK                 | 74.0           | -9.4        | 1.65 V             | 68                   | 36.4             | 28.2                     |
| 6                                                    | 11650.00        | 48.8 AV                 | 54.0           | -5.2        | 1.65 V             | 68                   | 20.6             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

### Mode B\_2Tx

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 36 : 5180 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.7 PK                 | 74.0           | -19.3       | 2.64 H             | 185                  | 40.9             | 13.8                     |
| 2                                                    | 5150.00         | 43.6 AV                 | 54.0           | -10.4       | 2.64 H             | 185                  | 29.8             | 13.8                     |
| 3                                                    | *5180.00        | 100.2 PK                |                |             | 2.64 H             | 185                  | 86.2             | 14.0                     |
| 4                                                    | *5180.00        | 93.3 AV                 |                |             | 2.64 H             | 185                  | 79.3             | 14.0                     |
| 5                                                    | #10360.00       | 61.2 PK                 | 68.2           | -7.0        | 1.85 H             | 148                  | 35.4             | 25.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 60.5 PK                 | 74.0           | -13.5       | 1.63 V             | 272                  | 46.7             | 13.8                     |
| 2                                                    | 5150.00         | 47.4 AV                 | 54.0           | -6.6        | 1.63 V             | 272                  | 33.6             | 13.8                     |
| 3                                                    | *5180.00        | 114.0 PK                |                |             | 1.63 V             | 272                  | 100.0            | 14.0                     |
| 4                                                    | *5180.00        | 106.7 AV                |                |             | 1.63 V             | 272                  | 92.7             | 14.0                     |
| 5                                                    | #10360.00       | 62.3 PK                 | 68.2           | -5.9        | 1.74 V             | 253                  | 36.5             | 25.8                     |

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 40 : 5200 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 100.4 PK                |                |             | 2.72 H             | 180                  | 86.3             | 14.1                     |
| 2                                                    | *5200.00        | 93.5 AV                 |                |             | 2.72 H             | 180                  | 79.4             | 14.1                     |
| 3                                                    | #10400.00       | 61.6 PK                 | 68.2           | -6.6        | 1.93 H             | 143                  | 35.5             | 26.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 114.2 PK                |                |             | 1.71 V             | 267                  | 100.1            | 14.1                     |
| 2                                                    | *5200.00        | 106.8 AV                |                |             | 1.71 V             | 267                  | 92.7             | 14.1                     |
| 3                                                    | #10400.00       | 62.7 PK                 | 68.2           | -5.5        | 1.82 V             | 258                  | 36.6             | 26.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 48 : 5240 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | William Su     |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 101.5 PK                |                |             | 2.56 H             | 173                  | 87.2             | 14.3                     |
| 2                                                    | *5240.00        | 95.3 AV                 |                |             | 2.56 H             | 173                  | 81.0             | 14.3                     |
| 3                                                    | 5350.00         | 54.9 PK                 | 74.0           | -19.1       | 2.56 H             | 173                  | 39.9             | 15.0                     |
| 4                                                    | 5350.00         | 43.9 AV                 | 54.0           | -10.1       | 2.56 H             | 173                  | 28.9             | 15.0                     |
| 5                                                    | #10480.00       | 61.3 PK                 | 68.2           | -6.9        | 1.77 H             | 136                  | 35.6             | 25.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 115.8 PK                |                |             | 1.55 V             | 260                  | 101.4            | 14.4                     |
| 2                                                    | *5240.00        | 109.5 AV                |                |             | 1.55 V             | 260                  | 95.1             | 14.4                     |
| 3                                                    | 5350.00         | 55.9 PK                 | 74.0           | -18.1       | 1.55 V             | 260                  | 40.9             | 15.0                     |
| 4                                                    | 5350.00         | 44.7 AV                 | 54.0           | -9.3        | 1.55 V             | 260                  | 29.7             | 15.0                     |
| 5                                                    | #10480.00       | 63.0 PK                 | 68.2           | -5.2        | 1.66 V             | 241                  | 36.7             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 52 : 5260 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.0 PK                 | 74.0           | -19.0       | 2.65 H             | 192                  | 41.2             | 13.8                     |
| 2                                                    | 5150.00         | 44.1 AV                 | 54.0           | -9.9        | 2.65 H             | 192                  | 30.3             | 13.8                     |
| 3                                                    | *5260.00        | 101.6 PK                |                |             | 2.65 H             | 192                  | 86.9             | 14.7                     |
| 4                                                    | *5260.00        | 95.1 AV                 |                |             | 2.65 H             | 192                  | 80.4             | 14.7                     |
| 5                                                    | #10520.00       | 61.6 PK                 | 68.2           | -6.6        | 1.84 H             | 155                  | 35.3             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.3 PK                 | 74.0           | -18.7       | 1.64 V             | 279                  | 41.5             | 13.8                     |
| 2                                                    | 5150.00         | 44.4 AV                 | 54.0           | -9.6        | 1.64 V             | 279                  | 30.6             | 13.8                     |
| 3                                                    | *5260.00        | 115.2 PK                |                |             | 1.64 V             | 279                  | 100.5            | 14.7                     |
| 4                                                    | *5260.00        | 108.5 AV                |                |             | 1.64 V             | 279                  | 93.8             | 14.7                     |
| 5                                                    | #10520.00       | 62.7 PK                 | 68.2           | -5.5        | 1.75 V             | 260                  | 36.4             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 60 : 5300 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 101.8 PK                |                |             | 2.73 H             | 204                  | 86.8             | 15.0                     |
| 2                                                    | *5300.00        | 95.5 AV                 |                |             | 2.73 H             | 204                  | 80.5             | 15.0                     |
| 3                                                    | 10600.00        | 62.1 PK                 | 74.0           | -11.9       | 1.94 H             | 167                  | 35.4             | 26.7                     |
| 4                                                    | 10600.00        | 46.0 AV                 | 54.0           | -8.0        | 1.94 H             | 167                  | 19.3             | 26.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 115.6 PK                |                |             | 1.72 V             | 291                  | 100.6            | 15.0                     |
| 2                                                    | *5300.00        | 108.9 AV                |                |             | 1.72 V             | 291                  | 93.9             | 15.0                     |
| 3                                                    | 10600.00        | 63.2 PK                 | 74.0           | -10.8       | 1.83 V             | 272                  | 36.5             | 26.7                     |
| 4                                                    | 10600.00        | 47.1 AV                 | 54.0           | -6.9        | 1.83 V             | 272                  | 20.4             | 26.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 64 : 5320 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | William Su     |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 100.9 PK                |                |             | 1.51 H             | 90                   | 86.0             | 14.9                     |
| 2                                                    | *5320.00        | 94.1 AV                 |                |             | 1.51 H             | 90                   | 79.2             | 14.9                     |
| 3                                                    | 5350.00         | 55.3 PK                 | 74.0           | -18.7       | 1.51 H             | 90                   | 40.3             | 15.0                     |
| 4                                                    | 5350.00         | 44.2 AV                 | 54.0           | -9.8        | 1.51 H             | 90                   | 29.2             | 15.0                     |
| 5                                                    | 10640.00        | 61.9 PK                 | 74.0           | -12.1       | 1.71 H             | 142                  | 35.5             | 26.4                     |
| 6                                                    | 10640.00        | 46.0 AV                 | 54.0           | -8.0        | 1.71 H             | 142                  | 19.6             | 26.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 115.6 PK                |                |             | 1.50 V             | 270                  | 100.7            | 14.9                     |
| 2                                                    | *5320.00        | 108.6 AV                |                |             | 1.50 V             | 270                  | 93.7             | 14.9                     |
| 3                                                    | 5350.00         | 59.6 PK                 | 74.0           | -14.4       | 1.50 V             | 270                  | 44.6             | 15.0                     |
| 4                                                    | 5350.00         | 47.7 AV                 | 54.0           | -6.3        | 1.50 V             | 270                  | 32.7             | 15.0                     |
| 5                                                    | 10640.00        | 63.0 PK                 | 74.0           | -11.0       | 1.62 V             | 254                  | 36.6             | 26.4                     |
| 6                                                    | 10640.00        | 46.9 AV                 | 54.0           | -7.1        | 1.62 V             | 254                  | 20.5             | 26.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 100 : 5500 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | William Su     |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 55.6 PK                 | 74.0           | -18.4       | 1.54 H             | 219                  | 40.3             | 15.3                     |
| 2                                                    | 5460.00         | 45.8 AV                 | 54.0           | -8.2        | 1.54 H             | 219                  | 30.5             | 15.3                     |
| 3                                                    | #5470.00        | 56.6 PK                 | 68.2           | -11.6       | 1.54 H             | 219                  | 41.2             | 15.4                     |
| 4                                                    | *5500.00        | 100.2 PK                |                |             | 1.54 H             | 219                  | 84.6             | 15.6                     |
| 5                                                    | *5500.00        | 92.9 AV                 |                |             | 1.54 H             | 219                  | 77.3             | 15.6                     |
| 6                                                    | 11000.00        | 62.1 PK                 | 74.0           | -11.9       | 1.74 H             | 145                  | 35.2             | 26.9                     |
| 7                                                    | 11000.00        | 46.2 AV                 | 54.0           | -7.8        | 1.74 H             | 145                  | 19.3             | 26.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 63.7 PK                 | 74.0           | -10.3       | 1.53 V             | 85                   | 48.4             | 15.3                     |
| 2                                                    | 5460.00         | 47.8 AV                 | 54.0           | -6.2        | 1.53 V             | 85                   | 32.5             | 15.3                     |
| 3                                                    | #5470.00        | 68.1 PK                 | 68.2           | -0.1        | 1.53 V             | 85                   | 52.7             | 15.4                     |
| 4                                                    | *5500.00        | 115.7 PK                |                |             | 1.53 V             | 85                   | 100.1            | 15.6                     |
| 5                                                    | *5500.00        | 109.1 AV                |                |             | 1.53 V             | 85                   | 93.5             | 15.6                     |
| 6                                                    | 11000.00        | 63.6 PK                 | 74.0           | -10.4       | 1.68 V             | 258                  | 36.7             | 26.9                     |
| 7                                                    | 11000.00        | 47.5 AV                 | 54.0           | -6.5        | 1.68 V             | 258                  | 20.6             | 26.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 116 : 5580 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 101.0 PK                |                |             | 2.63 H             | 185                  | 85.6             | 15.4                     |
| 2                                                    | *5580.00        | 94.1 AV                 |                |             | 2.63 H             | 185                  | 78.7             | 15.4                     |
| 3                                                    | 11160.00        | 62.9 PK                 | 74.0           | -11.1       | 1.85 H             | 147                  | 34.8             | 28.1                     |
| 4                                                    | 11160.00        | 46.8 AV                 | 54.0           | -7.2        | 1.85 H             | 147                  | 18.7             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 114.8 PK                |                |             | 1.63 V             | 273                  | 99.4             | 15.4                     |
| 2                                                    | *5580.00        | 108.0 AV                |                |             | 1.63 V             | 273                  | 92.6             | 15.4                     |
| 3                                                    | 11160.00        | 64.0 PK                 | 74.0           | -10.0       | 1.73 V             | 254                  | 35.9             | 28.1                     |
| 4                                                    | 11160.00        | 47.9 AV                 | 54.0           | -6.1        | 1.73 V             | 254                  | 19.8             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 140 : 5700 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 102.9 PK                |                |             | 2.52 H             | 184                  | 87.8             | 15.1                     |
| 2                                                    | *5700.00        | 95.9 AV                 |                |             | 2.52 H             | 184                  | 80.8             | 15.1                     |
| 3                                                    | #5725.00        | 61.4 PK                 | 68.2           | -6.8        | 2.52 H             | 184                  | 46.3             | 15.1                     |
| 4                                                    | 11400.00        | 63.2 PK                 | 74.0           | -10.8       | 1.73 H             | 148                  | 35.2             | 28.0                     |
| 5                                                    | 11400.00        | 47.1 AV                 | 54.0           | -6.9        | 1.73 H             | 148                  | 19.1             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 116.6 PK                |                |             | 1.51 V             | 271                  | 101.5            | 15.1                     |
| 2                                                    | *5700.00        | 110.0 AV                |                |             | 1.51 V             | 271                  | 94.9             | 15.1                     |
| 3                                                    | #5725.00        | 67.2 PK                 | 68.2           | -1.0        | 1.51 V             | 271                  | 52.1             | 15.1                     |
| 4                                                    | 11400.00        | 64.3 PK                 | 74.0           | -9.7        | 1.64 V             | 252                  | 36.3             | 28.0                     |
| 5                                                    | 11400.00        | 48.2 AV                 | 54.0           | -5.8        | 1.64 V             | 252                  | 20.2             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 144 : 5720 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.9 PK                 | 68.2           | -11.3       | 2.66 H             | 199                  | 41.5             | 15.4                     |
| 2                                                    | *5720.00        | 104.1 PK                |                |             | 2.66 H             | 199                  | 89.0             | 15.1                     |
| 3                                                    | *5720.00        | 96.2 AV                 |                |             | 2.66 H             | 199                  | 81.1             | 15.1                     |
| 4                                                    | 11440.00        | 62.8 PK                 | 74.0           | -11.2       | 1.93 H             | 158                  | 34.9             | 27.9                     |
| 5                                                    | 11440.00        | 47.2 AV                 | 54.0           | -6.8        | 1.93 H             | 158                  | 19.3             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 57.5 PK                 | 68.2           | -10.7       | 1.54 V             | 273                  | 42.1             | 15.4                     |
| 2                                                    | *5720.00        | 116.6 PK                |                |             | 1.54 V             | 273                  | 101.5            | 15.1                     |
| 3                                                    | *5720.00        | 109.9 AV                |                |             | 1.54 V             | 273                  | 94.8             | 15.1                     |
| 4                                                    | 11440.00        | 63.9 PK                 | 74.0           | -10.1       | 1.79 V             | 66                   | 36.0             | 27.9                     |
| 5                                                    | 11440.00        | 48.3 AV                 | 54.0           | -5.7        | 1.79 V             | 66                   | 20.4             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 149 : 5745 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5561.87        | 55.3 PK                 | 68.2           | -12.9       | 2.51 H             | 182                  | 39.7             | 15.6                     |
| 2                                                    | *5745.00        | 108.0 PK                |                |             | 2.51 H             | 182                  | 92.9             | 15.1                     |
| 3                                                    | *5745.00        | 100.8 AV                |                |             | 2.51 H             | 182                  | 85.7             | 15.1                     |
| 4                                                    | #5946.15        | 56.0 PK                 | 68.2           | -12.2       | 2.51 H             | 182                  | 40.7             | 15.3                     |
| 5                                                    | 11490.00        | 63.3 PK                 | 74.0           | -10.7       | 1.72 H             | 145                  | 35.4             | 27.9                     |
| 6                                                    | 11490.00        | 46.9 AV                 | 54.0           | -7.1        | 1.72 H             | 145                  | 19.0             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5616.50        | 55.4 PK                 | 68.2           | -12.8       | 1.50 V             | 269                  | 40.2             | 15.2                     |
| 2                                                    | *5745.00        | 121.8 PK                |                |             | 1.50 V             | 269                  | 106.7            | 15.1                     |
| 3                                                    | *5745.00        | 115.1 AV                |                |             | 1.50 V             | 269                  | 100.0            | 15.1                     |
| 4                                                    | #6012.18        | 59.7 PK                 | 68.2           | -8.5        | 1.50 V             | 269                  | 44.5             | 15.2                     |
| 5                                                    | 11490.00        | 64.4 PK                 | 74.0           | -9.6        | 1.63 V             | 250                  | 36.5             | 27.9                     |
| 6                                                    | 11490.00        | 48.0 AV                 | 54.0           | -6.0        | 1.63 V             | 250                  | 20.1             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 157 : 5785 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | William Su     |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5609.20        | 51.2 PK                 | 68.2           | -17.0       | 1.55 H             | 226                  | 35.9             | 15.3                     |
| 2                                                    | *5785.00        | 106.5 PK                |                |             | 1.55 H             | 226                  | 91.5             | 15.0                     |
| 3                                                    | *5785.00        | 100.3 AV                |                |             | 1.55 H             | 226                  | 85.3             | 15.0                     |
| 4                                                    | #5942.40        | 52.3 PK                 | 68.2           | -15.9       | 1.55 H             | 226                  | 37.1             | 15.2                     |
| 5                                                    | 11570.00        | 64.4 PK                 | 74.0           | -9.6        | 1.69 H             | 139                  | 36.2             | 28.2                     |
| 6                                                    | 11570.00        | 48.1 AV                 | 54.0           | -5.9        | 1.69 H             | 139                  | 19.9             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5636.80        | 51.8 PK                 | 68.2           | -16.4       | 1.59 V             | 93                   | 36.4             | 15.4                     |
| 2                                                    | *5785.00        | 121.0 PK                |                |             | 1.59 V             | 93                   | 106.0            | 15.0                     |
| 3                                                    | *5785.00        | 113.7 AV                |                |             | 1.59 V             | 93                   | 98.7             | 15.0                     |
| 4                                                    | #5935.20        | 51.2 PK                 | 68.2           | -17.0       | 1.59 V             | 93                   | 36.0             | 15.2                     |
| 5                                                    | 11570.00        | 65.4 PK                 | 74.0           | -8.6        | 1.72 V             | 249                  | 37.2             | 28.2                     |
| 6                                                    | 11570.00        | 49.0 AV                 | 54.0           | -5.0        | 1.72 V             | 249                  | 20.8             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                |                                          |                                                                      |
|------------------------|----------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11a        | <b>Channel</b>                           | CH 165 : 5825 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu         |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5588.00        | 55.3 PK                 | 68.2           | -12.9       | 2.54 H             | 185                  | 40.0             | 15.3                     |
| 2                                                    | *5825.00        | 107.4 PK                |                |             | 2.54 H             | 185                  | 92.5             | 14.9                     |
| 3                                                    | *5825.00        | 100.9 AV                |                |             | 2.54 H             | 185                  | 86.0             | 14.9                     |
| 4                                                    | #6007.43        | 55.9 PK                 | 68.2           | -12.3       | 2.54 H             | 185                  | 40.8             | 15.1                     |
| 5                                                    | 11650.00        | 63.4 PK                 | 74.0           | -10.6       | 1.75 H             | 149                  | 35.2             | 28.2                     |
| 6                                                    | 11650.00        | 47.0 AV                 | 54.0           | -7.0        | 1.75 H             | 149                  | 18.8             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5578.98        | 55.8 PK                 | 68.2           | -12.4       | 1.53 V             | 271                  | 40.4             | 15.4                     |
| 2                                                    | *5825.00        | 121.4 PK                |                |             | 1.53 V             | 271                  | 106.5            | 14.9                     |
| 3                                                    | *5825.00        | 114.7 AV                |                |             | 1.53 V             | 271                  | 99.8             | 14.9                     |
| 4                                                    | #5939.02        | 57.0 PK                 | 68.2           | -11.2       | 1.53 V             | 271                  | 41.8             | 15.2                     |
| 5                                                    | 11650.00        | 64.5 PK                 | 74.0           | -9.5        | 1.66 V             | 252                  | 36.3             | 28.2                     |
| 6                                                    | 11650.00        | 48.1 AV                 | 54.0           | -5.9        | 1.66 V             | 252                  | 19.9             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 36 : 5180 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | William Su       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 59.4 PK                 | 74.0           | -14.6       | 2.41 H             | 177                  | 45.6             | 13.8                     |
| 2                                                    | 5150.00         | 45.1 AV                 | 54.0           | -8.9        | 2.41 H             | 177                  | 31.3             | 13.8                     |
| 3                                                    | *5180.00        | 101.5 PK                |                |             | 2.41 H             | 177                  | 87.6             | 13.9                     |
| 4                                                    | *5180.00        | 92.1 AV                 |                |             | 2.41 H             | 177                  | 78.2             | 13.9                     |
| 5                                                    | #10360.00       | 60.6 PK                 | 68.2           | -7.6        | 1.71 H             | 141                  | 35.5             | 25.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 63.3 PK                 | 74.0           | -10.7       | 1.50 V             | 270                  | 49.5             | 13.8                     |
| 2                                                    | 5150.00         | 48.7 AV                 | 54.0           | -5.3        | 1.50 V             | 270                  | 34.9             | 13.8                     |
| 3                                                    | *5180.00        | 116.9 PK                |                |             | 1.50 V             | 270                  | 103.0            | 13.9                     |
| 4                                                    | *5180.00        | 106.2 AV                |                |             | 1.50 V             | 270                  | 92.3             | 13.9                     |
| 5                                                    | #10360.00       | 61.6 PK                 | 68.2           | -6.6        | 1.66 V             | 255                  | 36.5             | 25.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 40 : 5200 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 102.1 PK                |                |             | 2.71 H             | 179                  | 88.0             | 14.1                     |
| 2                                                    | *5200.00        | 93.5 AV                 |                |             | 2.71 H             | 179                  | 79.4             | 14.1                     |
| 3                                                    | #10400.00       | 61.2 PK                 | 68.2           | -7.0        | 1.92 H             | 142                  | 35.1             | 26.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 115.9 PK                |                |             | 1.70 V             | 266                  | 101.8            | 14.1                     |
| 2                                                    | *5200.00        | 106.9 AV                |                |             | 1.70 V             | 266                  | 92.8             | 14.1                     |
| 3                                                    | #10400.00       | 62.3 PK                 | 68.2           | -5.9        | 1.86 V             | 251                  | 36.2             | 26.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                 |                  |                               |                                                                      |
|-----------------|------------------|-------------------------------|----------------------------------------------------------------------|
| RF Mode         | 802.11be (EHT20) | Channel                       | CH 48 : 5240 MHz                                                     |
| Frequency Range | 1 GHz ~ 40 GHz   | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| Input Power     | 120 Vac, 60 Hz   | Environmental Conditions      | 27.6 °C, 75.3 % RH                                                   |
| Tested By       | Jed Wu           |                               |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 104.5 PK                |                |             | 2.70 H             | 179                  | 90.1             | 14.4                     |
| 2                                                    | *5240.00        | 95.3 AV                 |                |             | 2.70 H             | 179                  | 80.9             | 14.4                     |
| 3                                                    | 5350.00         | 55.2 PK                 | 74.0           | -18.8       | 2.70 H             | 179                  | 40.2             | 15.0                     |
| 4                                                    | 5350.00         | 44.6 AV                 | 54.0           | -9.4        | 2.70 H             | 179                  | 29.6             | 15.0                     |
| 5                                                    | #10480.00       | 60.4 PK                 | 68.2           | -7.8        | 1.91 H             | 142                  | 34.1             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 118.2 PK                |                |             | 1.69 V             | 266                  | 103.8            | 14.4                     |
| 2                                                    | *5240.00        | 108.6 AV                |                |             | 1.69 V             | 266                  | 94.2             | 14.4                     |
| 3                                                    | 5350.00         | 58.2 PK                 | 74.0           | -15.8       | 1.69 V             | 266                  | 43.2             | 15.0                     |
| 4                                                    | 5350.00         | 47.6 AV                 | 54.0           | -6.4        | 1.69 V             | 266                  | 32.6             | 15.0                     |
| 5                                                    | #10480.00       | 61.5 PK                 | 68.2           | -6.7        | 1.85 V             | 250                  | 35.2             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 52 : 5260 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.5 PK                 | 74.0           | -19.5       | 2.75 H             | 205                  | 40.7             | 13.8                     |
| 2                                                    | 5150.00         | 43.6 AV                 | 54.0           | -10.4       | 2.75 H             | 205                  | 29.8             | 13.8                     |
| 3                                                    | *5260.00        | 102.7 PK                |                |             | 2.75 H             | 205                  | 88.0             | 14.7                     |
| 4                                                    | *5260.00        | 93.8 AV                 |                |             | 2.75 H             | 205                  | 79.1             | 14.7                     |
| 5                                                    | #10520.00       | 59.2 PK                 | 68.2           | -9.0        | 1.96 H             | 168                  | 32.9             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.2 PK                 | 74.0           | -18.8       | 1.64 V             | 276                  | 41.4             | 13.8                     |
| 2                                                    | 5150.00         | 44.2 AV                 | 54.0           | -9.8        | 1.64 V             | 276                  | 30.4             | 13.8                     |
| 3                                                    | *5260.00        | 116.6 PK                |                |             | 1.64 V             | 276                  | 101.9            | 14.7                     |
| 4                                                    | *5260.00        | 107.5 AV                |                |             | 1.64 V             | 276                  | 92.8             | 14.7                     |
| 5                                                    | #10520.00       | 60.3 PK                 | 68.2           | -7.9        | 1.80 V             | 260                  | 34.0             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 60 : 5300 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | William Su       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 104.6 PK                |                |             | 1.65 H             | 49                   | 89.7             | 14.9                     |
| 2                                                    | *5300.00        | 96.0 AV                 |                |             | 1.65 H             | 49                   | 81.1             | 14.9                     |
| 3                                                    | 5350.00         | 55.2 PK                 | 74.0           | -18.8       | 1.65 H             | 49                   | 40.2             | 15.0                     |
| 4                                                    | 5350.00         | 44.0 AV                 | 54.0           | -10.0       | 1.65 H             | 49                   | 29.0             | 15.0                     |
| 5                                                    | 10600.00        | 61.2 PK                 | 74.0           | -12.8       | 1.75 H             | 140                  | 35.2             | 26.0                     |
| 6                                                    | 10600.00        | 45.2 AV                 | 54.0           | -8.8        | 1.75 H             | 140                  | 19.2             | 26.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 118.1 PK                |                |             | 1.88 V             | 98                   | 103.2            | 14.9                     |
| 2                                                    | *5300.00        | 109.2 AV                |                |             | 1.88 V             | 98                   | 94.3             | 14.9                     |
| 3                                                    | 5350.00         | 63.7 PK                 | 74.0           | -10.3       | 1.88 V             | 98                   | 48.7             | 15.0                     |
| 4                                                    | 5350.00         | 46.4 AV                 | 54.0           | -7.6        | 1.88 V             | 98                   | 31.4             | 15.0                     |
| 5                                                    | 10600.00        | 62.5 PK                 | 74.0           | -11.5       | 1.77 V             | 252                  | 36.5             | 26.0                     |
| 6                                                    | 10600.00        | 46.5 AV                 | 54.0           | -7.5        | 1.77 V             | 252                  | 20.5             | 26.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 64 : 5320 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 103.4 PK                |                |             | 2.77 H             | 208                  | 88.5             | 14.9                     |
| 2                                                    | *5320.00        | 94.9 AV                 |                |             | 2.77 H             | 208                  | 80.0             | 14.9                     |
| 3                                                    | 5350.00         | 54.8 PK                 | 74.0           | -19.2       | 2.77 H             | 208                  | 39.8             | 15.0                     |
| 4                                                    | 5350.00         | 44.8 AV                 | 54.0           | -9.2        | 2.77 H             | 208                  | 29.8             | 15.0                     |
| 5                                                    | 10640.00        | 60.9 PK                 | 74.0           | -13.1       | 1.99 H             | 170                  | 34.0             | 26.9                     |
| 6                                                    | 10640.00        | 44.8 AV                 | 54.0           | -9.2        | 1.99 H             | 170                  | 17.9             | 26.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 116.8 PK                |                |             | 1.61 V             | 267                  | 101.9            | 14.9                     |
| 2                                                    | *5320.00        | 107.6 AV                |                |             | 1.61 V             | 267                  | 92.7             | 14.9                     |
| 3                                                    | 5350.00         | 64.8 PK                 | 74.0           | -9.2        | 1.61 V             | 267                  | 49.8             | 15.0                     |
| 4                                                    | 5350.00         | 51.2 AV                 | 54.0           | -2.8        | 1.61 V             | 267                  | 36.2             | 15.0                     |
| 5                                                    | 10640.00        | 62.0 PK                 | 74.0           | -12.0       | 1.86 V             | 75                   | 35.1             | 26.9                     |
| 6                                                    | 10640.00        | 45.9 AV                 | 54.0           | -8.1        | 1.86 V             | 75                   | 19.0             | 26.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 100 : 5500 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 56.0 PK                 | 74.0           | -18.0       | 2.76 H             | 220                  | 40.7             | 15.3                     |
| 2                                                    | 5460.00         | 45.6 AV                 | 54.0           | -8.4        | 2.76 H             | 220                  | 30.3             | 15.3                     |
| 3                                                    | #5470.00        | 58.4 PK                 | 68.2           | -9.8        | 2.76 H             | 220                  | 43.0             | 15.4                     |
| 4                                                    | *5500.00        | 102.7 PK                |                |             | 2.76 H             | 220                  | 87.2             | 15.5                     |
| 5                                                    | *5500.00        | 93.7 AV                 |                |             | 2.76 H             | 220                  | 78.2             | 15.5                     |
| 6                                                    | 11000.00        | 60.8 PK                 | 74.0           | -13.2       | 2.00 H             | 182                  | 33.6             | 27.2                     |
| 7                                                    | 11000.00        | 44.7 AV                 | 54.0           | -9.3        | 2.00 H             | 182                  | 17.5             | 27.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 63.4 PK                 | 74.0           | -10.6       | 1.61 V             | 279                  | 48.1             | 15.3                     |
| 2                                                    | 5460.00         | 48.4 AV                 | 54.0           | -5.6        | 1.61 V             | 279                  | 33.1             | 15.3                     |
| 3                                                    | #5470.00        | 66.6 PK                 | 68.2           | -1.6        | 1.61 V             | 279                  | 51.2             | 15.4                     |
| 4                                                    | *5500.00        | 116.0 PK                |                |             | 1.61 V             | 279                  | 100.5            | 15.5                     |
| 5                                                    | *5500.00        | 107.8 AV                |                |             | 1.61 V             | 279                  | 92.3             | 15.5                     |
| 6                                                    | 11000.00        | 61.9 PK                 | 74.0           | -12.1       | 1.85 V             | 87                   | 34.7             | 27.2                     |
| 7                                                    | 11000.00        | 45.8 AV                 | 54.0           | -8.2        | 1.85 V             | 87                   | 18.6             | 27.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 116 : 5580 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | William Su       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 105.4 PK                |                |             | 1.48 H             | 58                   | 89.9             | 15.5                     |
| 2                                                    | *5580.00        | 95.3 AV                 |                |             | 1.48 H             | 58                   | 79.8             | 15.5                     |
| 3                                                    | 11600.00        | 63.7 PK                 | 74.0           | -10.3       | 1.66 H             | 146                  | 35.6             | 28.1                     |
| 4                                                    | 11600.00        | 47.7 AV                 | 54.0           | -6.3        | 1.66 H             | 146                  | 19.6             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 117.7 PK                |                |             | 1.77 V             | 93                   | 102.2            | 15.5                     |
| 2                                                    | *5580.00        | 108.9 AV                |                |             | 1.77 V             | 93                   | 93.4             | 15.5                     |
| 3                                                    | 11600.00        | 64.9 PK                 | 74.0           | -9.1        | 1.66 V             | 253                  | 36.8             | 28.1                     |
| 4                                                    | 11600.00        | 48.8 AV                 | 54.0           | -5.2        | 1.66 V             | 253                  | 20.7             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 140 : 5700 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 104.1 PK                |                |             | 2.74 H             | 210                  | 89.0             | 15.1                     |
| 2                                                    | *5700.00        | 94.9 AV                 |                |             | 2.74 H             | 210                  | 79.8             | 15.1                     |
| 3                                                    | #5725.00        | 57.9 PK                 | 68.2           | -10.3       | 2.74 H             | 210                  | 42.8             | 15.1                     |
| 4                                                    | 11400.00        | 61.9 PK                 | 74.0           | -12.1       | 1.96 H             | 172                  | 33.9             | 28.0                     |
| 5                                                    | 11400.00        | 45.8 AV                 | 54.0           | -8.2        | 1.96 H             | 172                  | 17.8             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 117.0 PK                |                |             | 1.58 V             | 269                  | 101.9            | 15.1                     |
| 2                                                    | *5700.00        | 107.9 AV                |                |             | 1.58 V             | 269                  | 92.8             | 15.1                     |
| 3                                                    | #5725.00        | 65.1 PK                 | 68.2           | -3.1        | 1.58 V             | 269                  | 50.0             | 15.1                     |
| 4                                                    | 11400.00        | 63.0 PK                 | 74.0           | -11.0       | 1.83 V             | 77                   | 35.0             | 28.0                     |
| 5                                                    | 11400.00        | 46.9 AV                 | 54.0           | -7.1        | 1.83 V             | 77                   | 18.9             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 144 : 5720 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.7 PK                 | 68.2           | -11.5       | 2.65 H             | 212                  | 41.3             | 15.4                     |
| 2                                                    | *5720.00        | 105.5 PK                |                |             | 2.65 H             | 212                  | 90.4             | 15.1                     |
| 3                                                    | *5720.00        | 96.7 AV                 |                |             | 2.65 H             | 212                  | 81.6             | 15.1                     |
| 4                                                    | 11440.00        | 63.1 PK                 | 74.0           | -10.9       | 1.92 H             | 171                  | 35.2             | 27.9                     |
| 5                                                    | 11440.00        | 47.5 AV                 | 54.0           | -6.5        | 1.92 H             | 171                  | 19.6             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 57.1 PK                 | 68.2           | -11.1       | 1.53 V             | 266                  | 41.7             | 15.4                     |
| 2                                                    | *5720.00        | 117.9 PK                |                |             | 1.53 V             | 266                  | 102.8            | 15.1                     |
| 3                                                    | *5720.00        | 110.1 AV                |                |             | 1.53 V             | 266                  | 95.0             | 15.1                     |
| 4                                                    | 11440.00        | 64.2 PK                 | 74.0           | -9.8        | 1.78 V             | 59                   | 36.3             | 27.9                     |
| 5                                                    | 11440.00        | 48.6 AV                 | 54.0           | -5.4        | 1.78 V             | 59                   | 20.7             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 149 : 5745 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | William Su       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5638.00        | 55.0 PK                 | 68.2           | -13.2       | 1.39 H             | 75                   | 39.7             | 15.3                     |
| 2                                                    | *5745.00        | 108.5 PK                |                |             | 1.39 H             | 75                   | 93.4             | 15.1                     |
| 3                                                    | *5745.00        | 100.6 AV                |                |             | 1.39 H             | 75                   | 85.5             | 15.1                     |
| 4                                                    | #5932.40        | 55.2 PK                 | 68.2           | -13.0       | 1.39 H             | 75                   | 40.0             | 15.2                     |
| 5                                                    | 11490.00        | 64.6 PK                 | 74.0           | -9.4        | 1.65 H             | 144                  | 36.2             | 28.4                     |
| 6                                                    | 11490.00        | 48.1 AV                 | 54.0           | -5.9        | 1.65 H             | 144                  | 19.7             | 28.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5647.20        | 56.3 PK                 | 68.2           | -11.9       | 1.63 V             | 84                   | 41.0             | 15.3                     |
| 2                                                    | *5745.00        | 122.3 PK                |                |             | 1.63 V             | 84                   | 107.2            | 15.1                     |
| 3                                                    | *5745.00        | 114.4 AV                |                |             | 1.63 V             | 84                   | 99.3             | 15.1                     |
| 4                                                    | #5932.80        | 55.8 PK                 | 68.2           | -12.4       | 1.63 V             | 84                   | 40.6             | 15.2                     |
| 5                                                    | 11490.00        | 66.1 PK                 | 74.0           | -7.9        | 1.72 V             | 258                  | 37.7             | 28.4                     |
| 6                                                    | 11490.00        | 49.9 AV                 | 54.0           | -4.1        | 1.72 V             | 258                  | 21.5             | 28.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 157 : 5785 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5632.18        | 55.1 PK                 | 68.2           | -13.1       | 2.75 H             | 207                  | 39.8             | 15.3                     |
| 2                                                    | *5785.00        | 109.0 PK                |                |             | 2.75 H             | 207                  | 94.1             | 14.9                     |
| 3                                                    | *5785.00        | 100.0 AV                |                |             | 2.75 H             | 207                  | 85.1             | 14.9                     |
| 4                                                    | #5990.80        | 55.7 PK                 | 68.2           | -12.5       | 2.75 H             | 207                  | 40.6             | 15.1                     |
| 5                                                    | 11570.00        | 62.6 PK                 | 74.0           | -11.4       | 1.87 H             | 170                  | 34.5             | 28.1                     |
| 6                                                    | 11570.00        | 46.5 AV                 | 54.0           | -7.5        | 1.87 H             | 170                  | 18.4             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5578.02        | 56.3 PK                 | 68.2           | -11.9       | 1.59 V             | 267                  | 40.9             | 15.4                     |
| 2                                                    | *5785.00        | 122.3 PK                |                |             | 1.59 V             | 267                  | 107.4            | 14.9                     |
| 3                                                    | *5785.00        | 112.8 AV                |                |             | 1.59 V             | 267                  | 97.9             | 14.9                     |
| 4                                                    | #5935.70        | 56.6 PK                 | 68.2           | -11.6       | 1.59 V             | 267                  | 41.4             | 15.2                     |
| 5                                                    | 11570.00        | 63.7 PK                 | 74.0           | -10.3       | 1.88 V             | 74                   | 35.6             | 28.1                     |
| 6                                                    | 11570.00        | 47.6 AV                 | 54.0           | -6.4        | 1.88 V             | 74                   | 19.5             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) | <b>Channel</b>                           | CH 165 : 5825 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5646.43        | 55.5 PK                 | 68.2           | -12.7       | 2.74 H             | 205                  | 40.3             | 15.2                     |
| 2                                                    | *5825.00        | 109.9 PK                |                |             | 2.74 H             | 205                  | 95.0             | 14.9                     |
| 3                                                    | *5825.00        | 100.7 AV                |                |             | 2.74 H             | 205                  | 85.8             | 14.9                     |
| 4                                                    | #5986.05        | 56.1 PK                 | 68.2           | -12.1       | 2.74 H             | 205                  | 41.0             | 15.1                     |
| 5                                                    | 11650.00        | 62.5 PK                 | 74.0           | -11.5       | 2.02 H             | 167                  | 34.3             | 28.2                     |
| 6                                                    | 11650.00        | 46.4 AV                 | 54.0           | -7.6        | 2.02 H             | 167                  | 18.2             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5624.10        | 55.7 PK                 | 68.2           | -12.5       | 1.59 V             | 267                  | 40.5             | 15.2                     |
| 2                                                    | *5825.00        | 123.1 PK                |                |             | 1.59 V             | 267                  | 108.2            | 14.9                     |
| 3                                                    | *5825.00        | 113.5 AV                |                |             | 1.59 V             | 267                  | 98.6             | 14.9                     |
| 4                                                    | #5930.48        | 56.7 PK                 | 68.2           | -11.5       | 1.59 V             | 267                  | 41.5             | 15.2                     |
| 5                                                    | 11650.00        | 63.6 PK                 | 74.0           | -10.4       | 1.84 V             | 73                   | 35.4             | 28.2                     |
| 6                                                    | 11650.00        | 47.5 AV                 | 54.0           | -6.5        | 1.84 V             | 73                   | 19.3             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 38 : 5190 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 61.3 PK                 | 74.0           | -12.7       | 2.78 H             | 221                  | 47.5             | 13.8                     |
| 2                                                    | 5150.00         | 46.0 AV                 | 54.0           | -8.0        | 2.78 H             | 221                  | 32.2             | 13.8                     |
| 3                                                    | *5190.00        | 100.9 PK                |                |             | 2.78 H             | 221                  | 86.8             | 14.1                     |
| 4                                                    | *5190.00        | 91.4 AV                 |                |             | 2.78 H             | 221                  | 77.3             | 14.1                     |
| 5                                                    | #10380.00       | 57.7 PK                 | 68.2           | -10.5       | 2.06 H             | 183                  | 31.7             | 26.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 69.6 PK                 | 74.0           | -4.4        | 1.64 V             | 275                  | 55.8             | 13.8                     |
| 2                                                    | 5150.00         | 52.8 AV                 | 54.0           | -1.2        | 1.64 V             | 275                  | 39.0             | 13.8                     |
| 3                                                    | *5190.00        | 112.8 PK                |                |             | 1.64 V             | 275                  | 98.7             | 14.1                     |
| 4                                                    | *5190.00        | 104.1 AV                |                |             | 1.64 V             | 275                  | 90.0             | 14.1                     |
| 5                                                    | #10380.00       | 58.8 PK                 | 68.2           | -9.4        | 1.82 V             | 263                  | 32.8             | 26.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 46 : 5230 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5230.00        | 101.5 PK                |                |             | 1.32 H             | 252                  | 87.2             | 14.3                     |
| 2                                                    | *5230.00        | 93.3 AV                 |                |             | 1.32 H             | 252                  | 79.0             | 14.3                     |
| 3                                                    | 5350.00         | 55.1 PK                 | 74.0           | -18.9       | 1.32 H             | 252                  | 40.1             | 15.0                     |
| 4                                                    | 5350.00         | 44.6 AV                 | 54.0           | -9.4        | 1.32 H             | 252                  | 29.6             | 15.0                     |
| 5                                                    | #10460.00       | 60.4 PK                 | 68.2           | -7.8        | 3.66 H             | 97                   | 34.8             | 25.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5230.00        | 115.1 PK                |                |             | 1.42 V             | 259                  | 100.8            | 14.3                     |
| 2                                                    | *5230.00        | 106.2 AV                |                |             | 1.42 V             | 259                  | 91.9             | 14.3                     |
| 3                                                    | 5350.00         | 55.9 PK                 | 74.0           | -18.1       | 1.42 V             | 259                  | 40.9             | 15.0                     |
| 4                                                    | 5350.00         | 45.7 AV                 | 54.0           | -8.3        | 1.42 V             | 259                  | 30.7             | 15.0                     |
| 5                                                    | #10460.00       | 61.5 PK                 | 68.2           | -6.7        | 2.16 V             | 319                  | 35.9             | 25.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 54 : 5270 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.8 PK                 | 74.0           | -19.2       | 1.33 H             | 253                  | 41.0             | 13.8                     |
| 2                                                    | 5150.00         | 43.7 AV                 | 54.0           | -10.3       | 1.33 H             | 253                  | 29.9             | 13.8                     |
| 3                                                    | *5270.00        | 102.8 PK                |                |             | 1.33 H             | 253                  | 88.1             | 14.7                     |
| 4                                                    | *5270.00        | 93.4 AV                 |                |             | 1.33 H             | 253                  | 78.7             | 14.7                     |
| 5                                                    | #10540.00       | 60.8 PK                 | 68.2           | -7.4        | 3.67 H             | 98                   | 34.9             | 25.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 56.1 PK                 | 74.0           | -17.9       | 1.43 V             | 260                  | 42.3             | 13.8                     |
| 2                                                    | 5150.00         | 44.8 AV                 | 54.0           | -9.2        | 1.43 V             | 260                  | 31.0             | 13.8                     |
| 3                                                    | *5270.00        | 115.5 PK                |                |             | 1.43 V             | 260                  | 100.8            | 14.7                     |
| 4                                                    | *5270.00        | 106.5 AV                |                |             | 1.43 V             | 260                  | 91.8             | 14.7                     |
| 5                                                    | #10540.00       | 61.9 PK                 | 68.2           | -6.3        | 2.15 V             | 318                  | 36.0             | 25.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 62 : 5310 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5310.00        | 102.0 PK                |                |             | 2.69 H             | 215                  | 87.0             | 15.0                     |
| 2                                                    | *5310.00        | 92.8 AV                 |                |             | 2.69 H             | 215                  | 77.8             | 15.0                     |
| 3                                                    | 5350.00         | 59.2 PK                 | 74.0           | -14.8       | 2.69 H             | 215                  | 44.2             | 15.0                     |
| 4                                                    | 5350.00         | 46.0 AV                 | 54.0           | -8.0        | 2.69 H             | 215                  | 31.0             | 15.0                     |
| 5                                                    | 10620.00        | 60.8 PK                 | 74.0           | -13.2       | 1.97 H             | 174                  | 34.1             | 26.7                     |
| 6                                                    | 10620.00        | 44.7 AV                 | 54.0           | -9.3        | 1.97 H             | 174                  | 18.0             | 26.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5310.00        | 114.0 PK                |                |             | 1.55 V             | 269                  | 99.0             | 15.0                     |
| 2                                                    | *5310.00        | 105.0 AV                |                |             | 1.55 V             | 269                  | 90.0             | 15.0                     |
| 3                                                    | 5350.00         | 67.4 PK                 | 74.0           | -6.6        | 1.55 V             | 269                  | 52.4             | 15.0                     |
| 4                                                    | 5350.00         | 52.3 AV                 | 54.0           | -1.7        | 1.55 V             | 269                  | 37.3             | 15.0                     |
| 5                                                    | 10620.00        | 61.9 PK                 | 74.0           | -12.1       | 1.80 V             | 75                   | 35.2             | 26.7                     |
| 6                                                    | 10620.00        | 45.8 AV                 | 54.0           | -8.2        | 1.80 V             | 75                   | 19.1             | 26.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 102 : 5510 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 56.1 PK                 | 74.0           | -17.9       | 2.68 H             | 219                  | 40.8             | 15.3                     |
| 2                                                    | 5460.00         | 45.0 AV                 | 54.0           | -9.0        | 2.68 H             | 219                  | 29.7             | 15.3                     |
| 3                                                    | #5470.00        | 58.5 PK                 | 68.2           | -9.7        | 2.68 H             | 219                  | 43.1             | 15.4                     |
| 4                                                    | *5510.00        | 102.5 PK                |                |             | 2.68 H             | 219                  | 87.0             | 15.5                     |
| 5                                                    | *5510.00        | 92.7 AV                 |                |             | 2.68 H             | 219                  | 77.2             | 15.5                     |
| 6                                                    | 11020.00        | 61.3 PK                 | 74.0           | -12.7       | 1.98 H             | 178                  | 33.8             | 27.5                     |
| 7                                                    | 11020.00        | 45.2 AV                 | 54.0           | -8.8        | 1.98 H             | 178                  | 17.7             | 27.5                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 63.7 PK                 | 74.0           | -10.3       | 1.54 V             | 273                  | 48.4             | 15.3                     |
| 2                                                    | 5460.00         | 48.8 AV                 | 54.0           | -5.2        | 1.54 V             | 273                  | 33.5             | 15.3                     |
| 3                                                    | #5470.00        | 65.1 PK                 | 68.2           | -3.1        | 1.54 V             | 273                  | 49.7             | 15.4                     |
| 4                                                    | *5510.00        | 114.2 PK                |                |             | 1.54 V             | 273                  | 98.7             | 15.5                     |
| 5                                                    | *5510.00        | 104.1 AV                |                |             | 1.54 V             | 273                  | 88.6             | 15.5                     |
| 6                                                    | 11020.00        | 62.4 PK                 | 74.0           | -11.6       | 1.79 V             | 71                   | 34.9             | 27.5                     |
| 7                                                    | 11020.00        | 46.3 AV                 | 54.0           | -7.7        | 1.79 V             | 71                   | 18.8             | 27.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 110 : 5550 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5550.00        | 101.7 PK                |                |             | 1.28 H             | 248                  | 85.9             | 15.8                     |
| 2                                                    | *5550.00        | 93.8 AV                 |                |             | 1.28 H             | 248                  | 78.0             | 15.8                     |
| 3                                                    | 11100.00        | 61.2 PK                 | 74.0           | -12.8       | 3.62 H             | 101                  | 33.5             | 27.7                     |
| 4                                                    | 11100.00        | 45.6 AV                 | 54.0           | -8.4        | 3.62 H             | 101                  | 17.9             | 27.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5550.00        | 115.3 PK                |                |             | 1.46 V             | 255                  | 99.5             | 15.8                     |
| 2                                                    | *5550.00        | 106.7 AV                |                |             | 1.46 V             | 255                  | 90.9             | 15.8                     |
| 3                                                    | 11100.00        | 62.3 PK                 | 74.0           | -11.7       | 2.20 V             | 323                  | 34.6             | 27.7                     |
| 4                                                    | 11100.00        | 46.7 AV                 | 54.0           | -7.3        | 2.20 V             | 323                  | 19.0             | 27.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 134 : 5670 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5670.00        | 104.2 PK                |                |             | 2.67 H             | 218                  | 88.9             | 15.3                     |
| 2                                                    | *5670.00        | 94.9 AV                 |                |             | 2.67 H             | 218                  | 79.6             | 15.3                     |
| 3                                                    | #5725.00        | 55.8 PK                 | 68.2           | -12.4       | 2.67 H             | 218                  | 40.7             | 15.1                     |
| 4                                                    | 11340.00        | 62.6 PK                 | 74.0           | -11.4       | 1.94 H             | 177                  | 34.4             | 28.2                     |
| 5                                                    | 11340.00        | 46.5 AV                 | 54.0           | -7.5        | 1.94 H             | 177                  | 18.3             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5670.00        | 116.2 PK                |                |             | 1.53 V             | 272                  | 100.9            | 15.3                     |
| 2                                                    | *5670.00        | 107.3 AV                |                |             | 1.53 V             | 272                  | 92.0             | 15.3                     |
| 3                                                    | #5725.00        | 63.7 PK                 | 68.2           | -4.5        | 1.53 V             | 272                  | 48.6             | 15.1                     |
| 4                                                    | 11340.00        | 63.7 PK                 | 74.0           | -10.3       | 1.78 V             | 78                   | 35.5             | 28.2                     |
| 5                                                    | 11340.00        | 47.6 AV                 | 54.0           | -6.4        | 1.78 V             | 78                   | 19.4             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 142 : 5710 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 57.1 PK                 | 68.2           | -11.1       | 2.61 H             | 213                  | 41.7             | 15.4                     |
| 2                                                    | *5710.00        | 103.3 PK                |                |             | 2.61 H             | 213                  | 88.1             | 15.2                     |
| 3                                                    | *5710.00        | 94.2 AV                 |                |             | 2.61 H             | 213                  | 79.0             | 15.2                     |
| 4                                                    | 11420.00        | 62.9 PK                 | 74.0           | -11.1       | 1.89 H             | 172                  | 34.9             | 28.0                     |
| 5                                                    | 11420.00        | 47.3 AV                 | 54.0           | -6.7        | 1.89 H             | 172                  | 19.3             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 57.3 PK                 | 68.2           | -10.9       | 1.55 V             | 267                  | 41.9             | 15.4                     |
| 2                                                    | *5710.00        | 115.8 PK                |                |             | 1.55 V             | 267                  | 100.6            | 15.2                     |
| 3                                                    | *5710.00        | 107.3 AV                |                |             | 1.55 V             | 267                  | 92.1             | 15.2                     |
| 4                                                    | 11420.00        | 64.0 PK                 | 74.0           | -10.0       | 1.80 V             | 60                   | 36.0             | 28.0                     |
| 5                                                    | 11420.00        | 48.4 AV                 | 54.0           | -5.6        | 1.80 V             | 60                   | 20.4             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 151 : 5755 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5631.70        | 56.2 PK                 | 68.2           | -12.0       | 2.70 H             | 216                  | 40.9             | 15.3                     |
| 2                                                    | *5755.00        | 107.6 PK                |                |             | 2.70 H             | 216                  | 92.5             | 15.1                     |
| 3                                                    | *5755.00        | 99.2 AV                 |                |             | 2.70 H             | 216                  | 84.1             | 15.1                     |
| 4                                                    | #6014.55        | 56.1 PK                 | 68.2           | -12.1       | 2.70 H             | 216                  | 40.9             | 15.2                     |
| 5                                                    | 11510.00        | 62.3 PK                 | 74.0           | -11.7       | 1.96 H             | 173                  | 34.5             | 27.8                     |
| 6                                                    | 11510.00        | 46.2 AV                 | 54.0           | -7.8        | 1.96 H             | 173                  | 18.4             | 27.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5648.80        | 61.3 PK                 | 68.2           | -6.9        | 1.55 V             | 270                  | 46.1             | 15.2                     |
| 2                                                    | *5755.00        | 119.5 PK                |                |             | 1.55 V             | 270                  | 104.4            | 15.1                     |
| 3                                                    | *5755.00        | 111.1 AV                |                |             | 1.55 V             | 270                  | 96.0             | 15.1                     |
| 4                                                    | #6016.93        | 55.8 PK                 | 68.2           | -12.4       | 1.55 V             | 270                  | 40.6             | 15.2                     |
| 5                                                    | 11510.00        | 63.4 PK                 | 74.0           | -10.6       | 1.81 V             | 76                   | 35.6             | 27.8                     |
| 6                                                    | 11510.00        | 47.3 AV                 | 54.0           | -6.7        | 1.81 V             | 76                   | 19.5             | 27.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT40) | <b>Channel</b>                           | CH 159 : 5795 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5628.40        | 55.6 PK                 | 68.2           | -12.6       | 1.42 H             | 71                   | 40.2             | 15.4                     |
| 2                                                    | *5795.00        | 106.9 PK                |                |             | 1.42 H             | 71                   | 92.0             | 14.9                     |
| 3                                                    | *5795.00        | 97.0 AV                 |                |             | 1.42 H             | 71                   | 82.1             | 14.9                     |
| 4                                                    | #5945.20        | 55.9 PK                 | 68.2           | -12.3       | 1.42 H             | 71                   | 40.6             | 15.3                     |
| 5                                                    | 11590.00        | 62.0 PK                 | 74.0           | -12.0       | 3.56 H             | 278                  | 33.9             | 28.1                     |
| 6                                                    | 11590.00        | 46.4 AV                 | 54.0           | -7.6        | 3.56 H             | 278                  | 18.3             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5647.20        | 56.2 PK                 | 68.2           | -12.0       | 1.52 V             | 78                   | 40.9             | 15.3                     |
| 2                                                    | *5795.00        | 120.1 PK                |                |             | 1.52 V             | 78                   | 105.2            | 14.9                     |
| 3                                                    | *5795.00        | 110.4 AV                |                |             | 1.52 V             | 78                   | 95.5             | 14.9                     |
| 4                                                    | #5936.00        | 56.3 PK                 | 68.2           | -11.9       | 1.52 V             | 78                   | 41.1             | 15.2                     |
| 5                                                    | 11590.00        | 63.1 PK                 | 74.0           | -10.9       | 2.26 V             | 146                  | 35.0             | 28.1                     |
| 6                                                    | 11590.00        | 47.5 AV                 | 54.0           | -6.5        | 2.26 V             | 146                  | 19.4             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 42 : 5210 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 56.4 PK                 | 74.0           | -17.6       | 1.36 H             | 263                  | 42.6             | 13.8                     |
| 2                                                    | 5150.00         | 44.6 AV                 | 54.0           | -9.4        | 1.36 H             | 263                  | 30.8             | 13.8                     |
| 3                                                    | *5210.00        | 95.6 PK                 |                |             | 1.36 H             | 263                  | 81.4             | 14.2                     |
| 4                                                    | *5210.00        | 87.0 AV                 |                |             | 1.36 H             | 263                  | 72.8             | 14.2                     |
| 5                                                    | 5350.00         | 55.0 PK                 | 74.0           | -19.0       | 1.36 H             | 263                  | 40.0             | 15.0                     |
| 6                                                    | 5350.00         | 44.5 AV                 | 54.0           | -9.5        | 1.36 H             | 263                  | 29.5             | 15.0                     |
| 7                                                    | #10420.00       | 58.1 PK                 | 68.2           | -10.1       | 3.70 H             | 116                  | 32.8             | 25.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 68.2 PK                 | 74.0           | -5.8        | 1.54 V             | 270                  | 54.4             | 13.8                     |
| 2                                                    | 5150.00         | 52.8 AV                 | 54.0           | -1.2        | 1.54 V             | 270                  | 39.0             | 13.8                     |
| 3                                                    | *5210.00        | 109.0 PK                |                |             | 1.54 V             | 270                  | 94.8             | 14.2                     |
| 4                                                    | *5210.00        | 99.5 AV                 |                |             | 1.54 V             | 270                  | 85.3             | 14.2                     |
| 5                                                    | 5350.00         | 57.6 PK                 | 74.0           | -16.4       | 1.54 V             | 270                  | 42.6             | 15.0                     |
| 6                                                    | 5350.00         | 45.6 AV                 | 54.0           | -8.4        | 1.54 V             | 270                  | 30.6             | 15.0                     |
| 7                                                    | #10420.00       | 59.2 PK                 | 68.2           | -9.0        | 2.28 V             | 338                  | 33.9             | 25.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 58 : 5290 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.1 PK                 | 74.0           | -19.9       | 1.22 H             | 239                  | 40.3             | 13.8                     |
| 2                                                    | 5150.00         | 43.8 AV                 | 54.0           | -10.2       | 1.22 H             | 239                  | 30.0             | 13.8                     |
| 3                                                    | *5290.00        | 97.2 PK                 |                |             | 1.22 H             | 239                  | 82.5             | 14.7                     |
| 4                                                    | *5290.00        | 87.4 AV                 |                |             | 1.22 H             | 239                  | 72.7             | 14.7                     |
| 5                                                    | 5350.00         | 57.6 PK                 | 74.0           | -16.4       | 1.22 H             | 239                  | 42.6             | 15.0                     |
| 6                                                    | 5350.00         | 45.7 AV                 | 54.0           | -8.3        | 1.22 H             | 239                  | 30.7             | 15.0                     |
| 7                                                    | #10580.00       | 59.5 PK                 | 68.2           | -8.7        | 3.56 H             | 110                  | 33.5             | 26.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 57.1 PK                 | 74.0           | -16.9       | 1.52 V             | 264                  | 43.3             | 13.8                     |
| 2                                                    | 5150.00         | 44.9 AV                 | 54.0           | -9.1        | 1.52 V             | 264                  | 31.1             | 13.8                     |
| 3                                                    | *5290.00        | 110.2 PK                |                |             | 1.52 V             | 264                  | 95.5             | 14.7                     |
| 4                                                    | *5290.00        | 99.9 AV                 |                |             | 1.52 V             | 264                  | 85.2             | 14.7                     |
| 5                                                    | 5350.00         | 68.7 PK                 | 74.0           | -5.3        | 1.52 V             | 264                  | 53.7             | 15.0                     |
| 6                                                    | 5350.00         | 52.9 AV                 | 54.0           | -1.1        | 1.52 V             | 264                  | 37.9             | 15.0                     |
| 7                                                    | #10580.00       | 60.6 PK                 | 68.2           | -7.6        | 2.14 V             | 314                  | 34.6             | 26.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 106 : 5530 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 56.4 PK                 | 74.0           | -17.6       | 2.76 H             | 209                  | 41.1             | 15.3                     |
| 2                                                    | 5460.00         | 45.1 AV                 | 54.0           | -8.9        | 2.76 H             | 209                  | 29.8             | 15.3                     |
| 3                                                    | #5470.00        | 57.9 PK                 | 68.2           | -10.3       | 2.76 H             | 209                  | 42.5             | 15.4                     |
| 4                                                    | *5530.00        | 95.6 PK                 |                |             | 2.76 H             | 209                  | 80.1             | 15.5                     |
| 5                                                    | *5530.00        | 86.2 AV                 |                |             | 2.76 H             | 209                  | 70.7             | 15.5                     |
| 6                                                    | 11060.00        | 62.3 PK                 | 74.0           | -11.7       | 2.03 H             | 168                  | 34.7             | 27.6                     |
| 7                                                    | 11060.00        | 47.8 AV                 | 54.0           | -6.2        | 2.03 H             | 168                  | 20.2             | 27.6                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 65.7 PK                 | 74.0           | -8.3        | 1.64 V             | 263                  | 50.4             | 15.3                     |
| 2                                                    | 5460.00         | 49.5 AV                 | 54.0           | -4.5        | 1.64 V             | 263                  | 34.2             | 15.3                     |
| 3                                                    | #5470.00        | 66.4 PK                 | 68.2           | -1.8        | 1.64 V             | 263                  | 51.0             | 15.4                     |
| 4                                                    | *5530.00        | 108.1 PK                |                |             | 1.64 V             | 263                  | 92.6             | 15.5                     |
| 5                                                    | *5530.00        | 99.3 AV                 |                |             | 1.64 V             | 263                  | 83.8             | 15.5                     |
| 6                                                    | 11060.00        | 63.4 PK                 | 74.0           | -10.6       | 1.89 V             | 56                   | 35.8             | 27.6                     |
| 7                                                    | 11060.00        | 48.9 AV                 | 54.0           | -5.1        | 1.89 V             | 56                   | 21.3             | 27.6                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 122 : 5610 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5610.00        | 97.8 PK                 |                |             | 2.61 H             | 214                  | 82.6             | 15.2                     |
| 2                                                    | *5610.00        | 89.6 AV                 |                |             | 2.61 H             | 214                  | 74.4             | 15.2                     |
| 3                                                    | #5725.00        | 57.4 PK                 | 68.2           | -10.8       | 2.61 H             | 214                  | 42.3             | 15.1                     |
| 4                                                    | 11220.00        | 61.5 PK                 | 74.0           | -12.5       | 1.88 H             | 173                  | 33.2             | 28.3                     |
| 5                                                    | 11220.00        | 47.0 AV                 | 54.0           | -7.0        | 1.88 H             | 173                  | 18.7             | 28.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5610.00        | 110.3 PK                |                |             | 1.49 V             | 268                  | 95.1             | 15.2                     |
| 2                                                    | *5610.00        | 101.2 AV                |                |             | 1.49 V             | 268                  | 86.0             | 15.2                     |
| 3                                                    | #5725.00        | 64.9 PK                 | 68.2           | -3.3        | 1.49 V             | 268                  | 49.8             | 15.1                     |
| 4                                                    | 11220.00        | 62.6 PK                 | 74.0           | -11.4       | 1.74 V             | 61                   | 34.3             | 28.3                     |
| 5                                                    | 11220.00        | 48.1 AV                 | 54.0           | -5.9        | 1.74 V             | 61                   | 19.8             | 28.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 138 : 5690 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 55.7 PK                 | 68.2           | -12.5       | 1.05 H             | 86                   | 40.3             | 15.4                     |
| 2                                                    | *5690.00        | 100.1 PK                |                |             | 1.05 H             | 86                   | 84.9             | 15.2                     |
| 3                                                    | *5690.00        | 90.9 AV                 |                |             | 1.05 H             | 86                   | 75.7             | 15.2                     |
| 4                                                    | 11380.00        | 62.8 PK                 | 74.0           | -11.2       | 3.39 H             | 263                  | 34.7             | 28.1                     |
| 5                                                    | 11380.00        | 47.2 AV                 | 54.0           | -6.8        | 3.39 H             | 263                  | 19.1             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 60.4 PK                 | 68.2           | -7.8        | 1.69 V             | 93                   | 45.0             | 15.4                     |
| 2                                                    | *5690.00        | 113.5 PK                |                |             | 1.69 V             | 93                   | 98.3             | 15.2                     |
| 3                                                    | *5690.00        | 104.5 AV                |                |             | 1.69 V             | 93                   | 89.3             | 15.2                     |
| 4                                                    | 11380.00        | 63.9 PK                 | 74.0           | -10.1       | 2.43 V             | 161                  | 35.8             | 28.1                     |
| 5                                                    | 11380.00        | 48.3 AV                 | 54.0           | -5.7        | 2.43 V             | 161                  | 20.2             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                  |                                          |                                                                      |
|------------------------|------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT80) | <b>Channel</b>                           | CH 155 : 5775 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz   | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu           |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5648.80        | 55.3 PK                 | 68.2           | -12.9       | 1.52 H             | 88                   | 40.0             | 15.3                     |
| 2                                                    | *5775.00        | 98.1 PK                 |                |             | 1.52 H             | 88                   | 83.1             | 15.0                     |
| 3                                                    | *5775.00        | 88.3 AV                 |                |             | 1.52 H             | 88                   | 73.3             | 15.0                     |
| 4                                                    | #5980.80        | 56.8 PK                 | 68.2           | -11.4       | 1.52 H             | 88                   | 41.6             | 15.2                     |
| 5                                                    | 11550.00        | 61.4 PK                 | 74.0           | -12.6       | 3.38 H             | 261                  | 33.1             | 28.3                     |
| 6                                                    | 11550.00        | 45.8 AV                 | 54.0           | -8.2        | 3.38 H             | 261                  | 17.5             | 28.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5642.00        | 63.8 PK                 | 68.2           | -4.4        | 1.70 V             | 95                   | 48.5             | 15.3                     |
| 2                                                    | *5775.00        | 111.7 PK                |                |             | 1.70 V             | 95                   | 96.7             | 15.0                     |
| 3                                                    | *5775.00        | 102.5 AV                |                |             | 1.70 V             | 95                   | 87.5             | 15.0                     |
| 4                                                    | #5941.20        | 64.4 PK                 | 68.2           | -3.8        | 1.70 V             | 95                   | 49.2             | 15.2                     |
| 5                                                    | 11550.00        | 62.5 PK                 | 74.0           | -11.5       | 2.44 V             | 163                  | 34.2             | 28.3                     |
| 6                                                    | 11550.00        | 46.9 AV                 | 54.0           | -7.1        | 2.44 V             | 163                  | 18.6             | 28.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                   |                                          |                                                                      |
|------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT160) | <b>Channel</b>                           | CH 50 : 5250 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu            |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.2 PK                 | 74.0           | -18.8       | 1.29 H             | 244                  | 41.4             | 13.8                     |
| 2                                                    | 5150.00         | 44.2 AV                 | 54.0           | -9.8        | 1.29 H             | 244                  | 30.4             | 13.8                     |
| 3                                                    | *5250.00        | 89.6 PK                 |                |             | 1.29 H             | 244                  | 75.0             | 14.6                     |
| 4                                                    | *5250.00        | 81.0 AV                 |                |             | 1.29 H             | 244                  | 66.4             | 14.6                     |
| 5                                                    | 5350.00         | 56.0 PK                 | 74.0           | -18.0       | 1.29 H             | 244                  | 41.0             | 15.0                     |
| 6                                                    | 5350.00         | 45.2 AV                 | 54.0           | -8.8        | 1.29 H             | 244                  | 30.2             | 15.0                     |
| 7                                                    | #10500.00       | 57.9 PK                 | 68.2           | -10.3       | 3.61 H             | 105                  | 32.2             | 25.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 65.1 PK                 | 74.0           | -8.9        | 1.45 V             | 259                  | 51.3             | 13.8                     |
| 2                                                    | 5150.00         | 52.7 AV                 | 54.0           | -1.3        | 1.45 V             | 259                  | 38.9             | 13.8                     |
| 3                                                    | *5250.00        | 101.8 PK                |                |             | 1.45 V             | 259                  | 87.2             | 14.6                     |
| 4                                                    | *5250.00        | 93.7 AV                 |                |             | 1.45 V             | 259                  | 79.1             | 14.6                     |
| 5                                                    | 5350.00         | 63.8 PK                 | 74.0           | -10.2       | 1.45 V             | 259                  | 48.8             | 15.0                     |
| 6                                                    | 5350.00         | 51.2 AV                 | 54.0           | -2.8        | 1.45 V             | 259                  | 36.2             | 15.0                     |
| 7                                                    | #10500.00       | 59.0 PK                 | 68.2           | -9.2        | 2.21 V             | 319                  | 33.3             | 25.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                   |                                          |                                                                      |
|------------------------|-------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT160) | <b>Channel</b>                           | CH 114 : 5570 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz    | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz    | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu            |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 57.3 PK                 | 74.0           | -16.7       | 1.40 H             | 80                   | 42.0             | 15.3                     |
| 2                                                    | 5460.00         | 45.6 AV                 | 54.0           | -8.4        | 1.40 H             | 80                   | 30.3             | 15.3                     |
| 3                                                    | #5470.00        | 56.2 PK                 | 68.2           | -12.0       | 1.40 H             | 80                   | 40.8             | 15.4                     |
| 4                                                    | *5570.00        | 90.0 PK                 |                |             | 1.40 H             | 80                   | 74.4             | 15.6                     |
| 5                                                    | *5570.00        | 80.3 AV                 |                |             | 1.40 H             | 80                   | 64.7             | 15.6                     |
| 6                                                    | #5725.00        | 58.5 PK                 | 68.2           | -9.7        | 1.40 H             | 80                   | 43.4             | 15.1                     |
| 7                                                    | 11140.00        | 60.1 PK                 | 74.0           | -13.9       | 3.50 H             | 269                  | 32.3             | 27.8                     |
| 8                                                    | 11140.00        | 44.5 AV                 | 54.0           | -9.5        | 3.50 H             | 269                  | 16.7             | 27.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 66.5 PK                 | 74.0           | -7.5        | 1.58 V             | 87                   | 51.2             | 15.3                     |
| 2                                                    | 5460.00         | 52.6 AV                 | 54.0           | -1.4        | 1.58 V             | 87                   | 37.3             | 15.3                     |
| 3                                                    | #5470.00        | 60.4 PK                 | 68.2           | -7.8        | 1.58 V             | 87                   | 45.0             | 15.4                     |
| 4                                                    | *5570.00        | 102.9 PK                |                |             | 1.58 V             | 87                   | 87.3             | 15.6                     |
| 5                                                    | *5570.00        | 94.0 AV                 |                |             | 1.58 V             | 87                   | 78.4             | 15.6                     |
| 6                                                    | #5725.00        | 67.1 PK                 | 68.2           | -1.1        | 1.58 V             | 87                   | 52.0             | 15.1                     |
| 7                                                    | 11140.00        | 61.2 PK                 | 74.0           | -12.8       | 2.32 V             | 155                  | 33.4             | 27.8                     |
| 8                                                    | 11140.00        | 45.6 AV                 | 54.0           | -8.4        | 2.32 V             | 155                  | 17.8             | 27.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 36 : 5180 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.2 PK                 | 74.0           | -18.8       | 2.32 H             | 209                  | 41.4             | 13.8                     |
| 2                                                    | 5150.00         | 43.9 AV                 | 54.0           | -10.1       | 2.32 H             | 209                  | 30.1             | 13.8                     |
| 3                                                    | *5180.00        | 105.5 PK                |                |             | 2.32 H             | 209                  | 91.5             | 14.0                     |
| 4                                                    | *5180.00        | 95.7 AV                 |                |             | 2.32 H             | 209                  | 81.7             | 14.0                     |
| 5                                                    | #10360.00       | 60.7 PK                 | 68.2           | -7.5        | 1.99 H             | 166                  | 34.9             | 25.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 57.6 PK                 | 74.0           | -16.4       | 1.64 V             | 276                  | 43.8             | 13.8                     |
| 2                                                    | 5150.00         | 46.6 AV                 | 54.0           | -7.4        | 1.64 V             | 276                  | 32.8             | 13.8                     |
| 3                                                    | *5180.00        | 115.8 PK                |                |             | 1.64 V             | 276                  | 101.8            | 14.0                     |
| 4                                                    | *5180.00        | 106.0 AV                |                |             | 1.64 V             | 276                  | 92.0             | 14.0                     |
| 5                                                    | #10360.00       | 61.8 PK                 | 68.2           | -6.4        | 1.89 V             | 71                   | 36.0             | 25.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 40 : 5200 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 105.7 PK                |                |             | 2.26 H             | 203                  | 91.6             | 14.1                     |
| 2                                                    | *5200.00        | 95.4 AV                 |                |             | 2.26 H             | 203                  | 81.3             | 14.1                     |
| 3                                                    | #10400.00       | 60.4 PK                 | 68.2           | -7.8        | 1.93 H             | 150                  | 34.3             | 26.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 116.1 PK                |                |             | 1.58 V             | 270                  | 102.0            | 14.1                     |
| 2                                                    | *5200.00        | 106.3 AV                |                |             | 1.58 V             | 270                  | 92.2             | 14.1                     |
| 3                                                    | #10400.00       | 61.5 PK                 | 68.2           | -6.7        | 1.83 V             | 65                   | 35.4             | 26.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 48 : 5240 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 103.3 PK                |                |             | 1.37 H             | 245                  | 89.0             | 14.3                     |
| 2                                                    | *5240.00        | 94.8 AV                 |                |             | 1.37 H             | 245                  | 80.5             | 14.3                     |
| 3                                                    | 5350.00         | 55.0 PK                 | 74.0           | -19.0       | 1.37 H             | 245                  | 40.0             | 15.0                     |
| 4                                                    | 5350.00         | 44.3 AV                 | 54.0           | -9.7        | 1.37 H             | 245                  | 29.3             | 15.0                     |
| 5                                                    | #10480.00       | 59.5 PK                 | 68.2           | -8.7        | 3.53 H             | 106                  | 33.8             | 25.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 116.4 PK                |                |             | 1.66 V             | 88                   | 102.1            | 14.3                     |
| 2                                                    | *5240.00        | 108.3 AV                |                |             | 1.66 V             | 88                   | 94.0             | 14.3                     |
| 3                                                    | 5350.00         | 55.3 PK                 | 74.0           | -18.7       | 1.66 V             | 88                   | 40.3             | 15.0                     |
| 4                                                    | 5350.00         | 44.6 AV                 | 54.0           | -9.4        | 1.66 V             | 88                   | 29.6             | 15.0                     |
| 5                                                    | #10480.00       | 60.6 PK                 | 68.2           | -7.6        | 2.40 V             | 156                  | 34.9             | 25.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 52 : 5260 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.3 PK                 | 74.0           | -19.7       | 1.23 H             | 75                   | 40.5             | 13.8                     |
| 2                                                    | 5150.00         | 43.4 AV                 | 54.0           | -10.6       | 1.23 H             | 75                   | 29.6             | 13.8                     |
| 3                                                    | *5260.00        | 103.5 PK                |                |             | 1.23 H             | 75                   | 88.8             | 14.7                     |
| 4                                                    | *5260.00        | 96.7 AV                 |                |             | 1.23 H             | 75                   | 82.0             | 14.7                     |
| 5                                                    | #10520.00       | 59.4 PK                 | 68.2           | -8.8        | 3.39 H             | 276                  | 33.6             | 25.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.0 PK                 | 74.0           | -19.0       | 1.52 V             | 258                  | 41.2             | 13.8                     |
| 2                                                    | 5150.00         | 44.0 AV                 | 54.0           | -10.0       | 1.52 V             | 258                  | 30.2             | 13.8                     |
| 3                                                    | *5260.00        | 116.6 PK                |                |             | 1.52 V             | 258                  | 101.9            | 14.7                     |
| 4                                                    | *5260.00        | 108.0 AV                |                |             | 1.52 V             | 258                  | 93.3             | 14.7                     |
| 5                                                    | #10520.00       | 60.5 PK                 | 68.2           | -7.7        | 2.26 V             | 326                  | 34.7             | 25.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 60 : 5300 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 106.7 PK                |                |             | 2.16 H             | 194                  | 91.7             | 15.0                     |
| 2                                                    | *5300.00        | 97.6 AV                 |                |             | 2.16 H             | 194                  | 82.6             | 15.0                     |
| 3                                                    | 10600.00        | 60.6 PK                 | 74.0           | -13.4       | 1.83 H             | 151                  | 33.9             | 26.7                     |
| 4                                                    | 10600.00        | 44.5 AV                 | 54.0           | -9.5        | 1.83 H             | 151                  | 17.8             | 26.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 117.1 PK                |                |             | 1.48 V             | 261                  | 102.1            | 15.0                     |
| 2                                                    | *5300.00        | 108.5 AV                |                |             | 1.48 V             | 261                  | 93.5             | 15.0                     |
| 3                                                    | 10600.00        | 61.7 PK                 | 74.0           | -12.3       | 1.73 V             | 56                   | 35.0             | 26.7                     |
| 4                                                    | 10600.00        | 45.6 AV                 | 54.0           | -8.4        | 1.73 V             | 56                   | 18.9             | 26.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 64 : 5320 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 106.0 PK                |                |             | 2.31 H             | 247                  | 91.1             | 14.9                     |
| 2                                                    | *5320.00        | 95.8 AV                 |                |             | 2.31 H             | 247                  | 80.9             | 14.9                     |
| 3                                                    | 5350.00         | 55.4 PK                 | 74.0           | -18.6       | 2.31 H             | 247                  | 40.4             | 15.0                     |
| 4                                                    | 5350.00         | 44.9 AV                 | 54.0           | -9.1        | 2.31 H             | 247                  | 29.9             | 15.0                     |
| 5                                                    | 10640.00        | 61.0 PK                 | 74.0           | -13.0       | 1.98 H             | 204                  | 34.1             | 26.9                     |
| 6                                                    | 10640.00        | 44.9 AV                 | 54.0           | -9.1        | 1.98 H             | 204                  | 18.0             | 26.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 116.4 PK                |                |             | 1.63 V             | 314                  | 101.5            | 14.9                     |
| 2                                                    | *5320.00        | 105.9 AV                |                |             | 1.63 V             | 314                  | 91.0             | 14.9                     |
| 3                                                    | 5350.00         | 56.1 PK                 | 74.0           | -17.9       | 1.63 V             | 314                  | 41.1             | 15.0                     |
| 4                                                    | 5350.00         | 46.8 AV                 | 54.0           | -7.2        | 1.63 V             | 314                  | 31.8             | 15.0                     |
| 5                                                    | 10640.00        | 62.1 PK                 | 74.0           | -11.9       | 1.88 V             | 109                  | 35.2             | 26.9                     |
| 6                                                    | 10640.00        | 46.0 AV                 | 54.0           | -8.0        | 1.88 V             | 109                  | 19.1             | 26.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 100 : 5500 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 55.5 PK                 | 74.0           | -18.5       | 2.23 H             | 210                  | 40.2             | 15.3                     |
| 2                                                    | 5460.00         | 45.0 AV                 | 54.0           | -9.0        | 2.23 H             | 210                  | 29.7             | 15.3                     |
| 3                                                    | #5470.00        | 56.1 PK                 | 68.2           | -12.1       | 2.23 H             | 210                  | 40.7             | 15.4                     |
| 4                                                    | *5500.00        | 107.0 PK                |                |             | 2.23 H             | 210                  | 91.5             | 15.5                     |
| 5                                                    | *5500.00        | 98.3 AV                 |                |             | 2.23 H             | 210                  | 82.8             | 15.5                     |
| 6                                                    | 11000.00        | 61.8 PK                 | 74.0           | -12.2       | 1.90 H             | 167                  | 34.6             | 27.2                     |
| 7                                                    | 11000.00        | 45.7 AV                 | 54.0           | -8.3        | 1.90 H             | 167                  | 18.5             | 27.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 55.9 PK                 | 74.0           | -18.1       | 1.55 V             | 277                  | 40.6             | 15.3                     |
| 2                                                    | 5460.00         | 45.3 AV                 | 54.0           | -8.7        | 1.55 V             | 277                  | 30.0             | 15.3                     |
| 3                                                    | #5470.00        | 58.1 PK                 | 68.2           | -10.1       | 1.55 V             | 277                  | 42.7             | 15.4                     |
| 4                                                    | *5500.00        | 117.5 PK                |                |             | 1.55 V             | 277                  | 102.0            | 15.5                     |
| 5                                                    | *5500.00        | 107.4 AV                |                |             | 1.55 V             | 277                  | 91.9             | 15.5                     |
| 6                                                    | 11000.00        | 62.9 PK                 | 74.0           | -11.1       | 1.83 V             | 72                   | 35.7             | 27.2                     |
| 7                                                    | 11000.00        | 46.8 AV                 | 54.0           | -7.2        | 1.83 V             | 72                   | 19.6             | 27.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 116 : 5580 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 103.2 PK                |                |             | 1.35 H             | 242                  | 87.7             | 15.5                     |
| 2                                                    | *5580.00        | 94.0 AV                 |                |             | 1.35 H             | 242                  | 78.5             | 15.5                     |
| 3                                                    | 11160.00        | 60.3 PK                 | 74.0           | -13.7       | 3.51 H             | 103                  | 32.5             | 27.8                     |
| 4                                                    | 11160.00        | 45.9 AV                 | 54.0           | -8.1        | 3.51 H             | 103                  | 18.1             | 27.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 116.3 PK                |                |             | 1.64 V             | 85                   | 100.8            | 15.5                     |
| 2                                                    | *5580.00        | 107.5 AV                |                |             | 1.64 V             | 85                   | 92.0             | 15.5                     |
| 3                                                    | 11160.00        | 61.4 PK                 | 74.0           | -12.6       | 2.38 V             | 153                  | 33.6             | 27.8                     |
| 4                                                    | 11160.00        | 47.0 AV                 | 54.0           | -7.0        | 2.38 V             | 153                  | 19.2             | 27.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 140 : 5700 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 105.5 PK                |                |             | 2.42 H             | 244                  | 90.4             | 15.1                     |
| 2                                                    | *5700.00        | 96.3 AV                 |                |             | 2.42 H             | 244                  | 81.2             | 15.1                     |
| 3                                                    | #5725.00        | 56.3 PK                 | 68.2           | -11.9       | 2.42 H             | 244                  | 41.2             | 15.1                     |
| 4                                                    | 11400.00        | 62.4 PK                 | 74.0           | -11.6       | 2.09 H             | 201                  | 34.4             | 28.0                     |
| 5                                                    | 11400.00        | 46.3 AV                 | 54.0           | -7.7        | 2.09 H             | 201                  | 18.3             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 115.8 PK                |                |             | 1.74 V             | 311                  | 100.7            | 15.1                     |
| 2                                                    | *5700.00        | 106.3 AV                |                |             | 1.74 V             | 311                  | 91.2             | 15.1                     |
| 3                                                    | #5725.00        | 57.1 PK                 | 68.2           | -11.1       | 1.74 V             | 311                  | 42.0             | 15.1                     |
| 4                                                    | 11400.00        | 63.5 PK                 | 74.0           | -10.5       | 2.02 V             | 106                  | 35.5             | 28.0                     |
| 5                                                    | 11400.00        | 47.4 AV                 | 54.0           | -6.6        | 2.02 V             | 106                  | 19.4             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 144 : 5720 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.0 PK                 | 68.2           | -12.2       | 2.40 H             | 245                  | 40.6             | 15.4                     |
| 2                                                    | *5720.00        | 105.9 PK                |                |             | 2.40 H             | 245                  | 90.8             | 15.1                     |
| 3                                                    | *5720.00        | 96.7 AV                 |                |             | 2.40 H             | 245                  | 81.6             | 15.1                     |
| 4                                                    | 11440.00        | 62.1 PK                 | 74.0           | -11.9       | 2.07 H             | 202                  | 34.2             | 27.9                     |
| 5                                                    | 11440.00        | 47.7 AV                 | 54.0           | -6.3        | 2.07 H             | 202                  | 19.8             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.2 PK                 | 68.2           | -12.0       | 1.72 V             | 312                  | 40.8             | 15.4                     |
| 2                                                    | *5720.00        | 116.2 PK                |                |             | 1.72 V             | 312                  | 101.1            | 15.1                     |
| 3                                                    | *5720.00        | 107.1 AV                |                |             | 1.72 V             | 312                  | 92.0             | 15.1                     |
| 4                                                    | 11440.00        | 63.2 PK                 | 74.0           | -10.8       | 1.97 V             | 115                  | 35.3             | 27.9                     |
| 5                                                    | 11440.00        | 48.8 AV                 | 54.0           | -5.2        | 1.97 V             | 115                  | 20.9             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 149 : 5745 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5638.40        | 56.5 PK                 | 68.2           | -11.7       | 1.30 H             | 39                   | 41.2             | 15.3                     |
| 2                                                    | *5745.00        | 114.4 PK                |                |             | 1.30 H             | 39                   | 99.3             | 15.1                     |
| 3                                                    | *5745.00        | 108.4 AV                |                |             | 1.30 H             | 39                   | 93.3             | 15.1                     |
| 4                                                    | #5968.00        | 56.2 PK                 | 68.2           | -12.0       | 1.30 H             | 39                   | 41.0             | 15.2                     |
| 5                                                    | 11490.00        | 61.6 PK                 | 74.0           | -12.4       | 3.46 H             | 260                  | 33.2             | 28.4                     |
| 6                                                    | 11490.00        | 47.2 AV                 | 54.0           | -6.8        | 3.46 H             | 260                  | 18.8             | 28.4                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5636.00        | 55.9 PK                 | 68.2           | -12.3       | 1.59 V             | 242                  | 40.5             | 15.4                     |
| 2                                                    | *5745.00        | 127.6 PK                |                |             | 1.59 V             | 242                  | 112.5            | 15.1                     |
| 3                                                    | *5745.00        | 121.5 AV                |                |             | 1.59 V             | 242                  | 106.4            | 15.1                     |
| 4                                                    | #5976.80        | 55.8 PK                 | 68.2           | -12.4       | 1.59 V             | 242                  | 40.6             | 15.2                     |
| 5                                                    | 11490.00        | 62.7 PK                 | 74.0           | -11.3       | 2.33 V             | 310                  | 34.3             | 28.4                     |
| 6                                                    | 11490.00        | 48.3 AV                 | 54.0           | -5.7        | 2.33 V             | 310                  | 19.9             | 28.4                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 157 : 5785 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5598.93        | 55.6 PK                 | 68.2           | -12.6       | 2.24 H             | 191                  | 40.4             | 15.2                     |
| 2                                                    | *5785.00        | 119.2 PK                |                |             | 2.24 H             | 191                  | 104.3            | 14.9                     |
| 3                                                    | *5785.00        | 112.4 AV                |                |             | 2.24 H             | 191                  | 97.5             | 14.9                     |
| 4                                                    | #5985.57        | 56.6 PK                 | 68.2           | -11.6       | 2.24 H             | 191                  | 41.5             | 15.1                     |
| 5                                                    | 11570.00        | 63.7 PK                 | 74.0           | -10.3       | 1.91 H             | 148                  | 35.6             | 28.1                     |
| 6                                                    | 11570.00        | 47.6 AV                 | 54.0           | -6.4        | 1.91 H             | 148                  | 19.5             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5623.62        | 57.0 PK                 | 68.2           | -11.2       | 1.56 V             | 272                  | 41.8             | 15.2                     |
| 2                                                    | *5785.00        | 129.4 PK                |                |             | 1.56 V             | 272                  | 114.5            | 14.9                     |
| 3                                                    | *5785.00        | 122.5 AV                |                |             | 1.56 V             | 272                  | 107.6            | 14.9                     |
| 4                                                    | #5944.25        | 57.6 PK                 | 68.2           | -10.6       | 1.56 V             | 272                  | 42.3             | 15.3                     |
| 5                                                    | 11570.00        | 64.8 PK                 | 74.0           | -9.2        | 1.81 V             | 67                   | 36.7             | 28.1                     |
| 6                                                    | 11570.00        | 48.7 AV                 | 54.0           | -5.3        | 1.81 V             | 67                   | 20.6             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 26-tone RU | <b>Channel</b>                           | CH 165 : 5825 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5629.32        | 56.3 PK                 | 68.2           | -11.9       | 2.33 H             | 247                  | 41.0             | 15.3                     |
| 2                                                    | *5825.00        | 112.5 PK                |                |             | 2.33 H             | 247                  | 97.6             | 14.9                     |
| 3                                                    | *5825.00        | 104.3 AV                |                |             | 2.33 H             | 247                  | 89.4             | 14.9                     |
| 4                                                    | #6010.27        | 56.4 PK                 | 68.2           | -11.8       | 2.33 H             | 247                  | 41.2             | 15.2                     |
| 5                                                    | 11650.00        | 63.6 PK                 | 74.0           | -10.4       | 2.00 H             | 204                  | 35.4             | 28.2                     |
| 6                                                    | 11650.00        | 47.5 AV                 | 54.0           | -6.5        | 2.00 H             | 204                  | 19.3             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5639.30        | 58.7 PK                 | 68.2           | -9.5        | 1.65 V             | 314                  | 43.5             | 15.2                     |
| 2                                                    | *5825.00        | 128.9 PK                |                |             | 1.65 V             | 314                  | 114.0            | 14.9                     |
| 3                                                    | *5825.00        | 120.8 AV                |                |             | 1.65 V             | 314                  | 105.9            | 14.9                     |
| 4                                                    | #5959.45        | 60.7 PK                 | 68.2           | -7.5        | 1.65 V             | 314                  | 45.5             | 15.2                     |
| 5                                                    | 11650.00        | 64.7 PK                 | 74.0           | -9.3        | 1.90 V             | 109                  | 36.5             | 28.2                     |
| 6                                                    | 11650.00        | 48.6 AV                 | 54.0           | -5.4        | 1.90 V             | 109                  | 20.4             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 36 : 5180 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 54.9 PK                 | 74.0           | -19.1       | 2.24 H             | 205                  | 41.1             | 13.8                     |
| 2                                                    | 5150.00         | 43.6 AV                 | 54.0           | -10.4       | 2.24 H             | 205                  | 29.8             | 13.8                     |
| 3                                                    | *5180.00        | 104.9 PK                |                |             | 2.24 H             | 205                  | 90.9             | 14.0                     |
| 4                                                    | *5180.00        | 95.1 AV                 |                |             | 2.24 H             | 205                  | 81.1             | 14.0                     |
| 5                                                    | #10360.00       | 59.6 PK                 | 68.2           | -8.6        | 1.91 H             | 162                  | 33.8             | 25.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 56.5 PK                 | 74.0           | -17.5       | 1.56 V             | 272                  | 42.7             | 13.8                     |
| 2                                                    | 5150.00         | 45.9 AV                 | 54.0           | -8.1        | 1.56 V             | 272                  | 32.1             | 13.8                     |
| 3                                                    | *5180.00        | 115.2 PK                |                |             | 1.56 V             | 272                  | 101.2            | 14.0                     |
| 4                                                    | *5180.00        | 95.7 AV                 |                |             | 1.56 V             | 272                  | 81.7             | 14.0                     |
| 5                                                    | #10360.00       | 61.2 PK                 | 68.2           | -7.0        | 1.81 V             | 75                   | 35.4             | 25.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 40 : 5200 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 103.9 PK                |                |             | 1.31 H             | 243                  | 89.9             | 14.0                     |
| 2                                                    | *5200.00        | 94.6 AV                 |                |             | 1.31 H             | 243                  | 80.6             | 14.0                     |
| 3                                                    | #10400.00       | 57.8 PK                 | 68.2           | -10.4       | 3.47 H             | 102                  | 32.7             | 25.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 117.0 PK                |                |             | 1.60 V             | 86                   | 103.0            | 14.0                     |
| 2                                                    | *5200.00        | 108.1 AV                |                |             | 1.60 V             | 86                   | 94.1             | 14.0                     |
| 3                                                    | #10400.00       | 58.9 PK                 | 68.2           | -9.3        | 2.34 V             | 154                  | 33.8             | 25.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 48 : 5240 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 107.6 PK                |                |             | 2.25 H             | 205                  | 93.2             | 14.4                     |
| 2                                                    | *5240.00        | 99.1 AV                 |                |             | 2.25 H             | 205                  | 84.7             | 14.4                     |
| 3                                                    | 5350.00         | 55.7 PK                 | 74.0           | -18.3       | 2.25 H             | 205                  | 40.7             | 15.0                     |
| 4                                                    | 5350.00         | 44.8 AV                 | 54.0           | -9.2        | 2.25 H             | 205                  | 29.8             | 15.0                     |
| 5                                                    | #10480.00       | 61.7 PK                 | 68.2           | -6.5        | 1.90 H             | 161                  | 35.4             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 117.7 PK                |                |             | 1.55 V             | 271                  | 103.3            | 14.4                     |
| 2                                                    | *5240.00        | 108.4 AV                |                |             | 1.55 V             | 271                  | 94.0             | 14.4                     |
| 3                                                    | 5350.00         | 55.9 PK                 | 74.0           | -18.1       | 1.55 V             | 271                  | 40.9             | 15.0                     |
| 4                                                    | 5350.00         | 45.0 AV                 | 54.0           | -9.0        | 1.55 V             | 271                  | 30.0             | 15.0                     |
| 5                                                    | #10480.00       | 62.8 PK                 | 68.2           | -5.4        | 1.82 V             | 76                   | 36.5             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 52 : 5260 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.0 PK                 | 74.0           | -19.0       | 2.22 H             | 204                  | 41.2             | 13.8                     |
| 2                                                    | 5150.00         | 44.2 AV                 | 54.0           | -9.8        | 2.22 H             | 204                  | 30.4             | 13.8                     |
| 3                                                    | *5260.00        | 107.9 PK                |                |             | 2.22 H             | 204                  | 93.2             | 14.7                     |
| 4                                                    | *5260.00        | 99.5 AV                 |                |             | 2.22 H             | 204                  | 84.8             | 14.7                     |
| 5                                                    | #10520.00       | 60.0 PK                 | 68.2           | -8.2        | 1.93 H             | 161                  | 33.7             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.2 PK                 | 74.0           | -18.8       | 1.54 V             | 272                  | 41.4             | 13.8                     |
| 2                                                    | 5150.00         | 44.4 AV                 | 54.0           | -9.6        | 1.54 V             | 272                  | 30.6             | 13.8                     |
| 3                                                    | *5260.00        | 118.1 PK                |                |             | 1.54 V             | 272                  | 103.4            | 14.7                     |
| 4                                                    | *5260.00        | 108.5 AV                |                |             | 1.54 V             | 272                  | 93.8             | 14.7                     |
| 5                                                    | #10520.00       | 61.1 PK                 | 68.2           | -7.1        | 1.79 V             | 76                   | 34.8             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 60 : 5300 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 103.8 PK                |                |             | 1.36 H             | 247                  | 88.9             | 14.9                     |
| 2                                                    | *5300.00        | 94.5 AV                 |                |             | 1.36 H             | 247                  | 79.6             | 14.9                     |
| 3                                                    | 10600.00        | 57.7 PK                 | 74.0           | -16.3       | 3.50 H             | 108                  | 31.7             | 26.0                     |
| 4                                                    | 10600.00        | 43.3 AV                 | 54.0           | -10.7       | 3.50 H             | 108                  | 17.3             | 26.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 116.9 PK                |                |             | 1.65 V             | 90                   | 102.0            | 14.9                     |
| 2                                                    | *5300.00        | 108.0 AV                |                |             | 1.65 V             | 90                   | 93.1             | 14.9                     |
| 3                                                    | 10600.00        | 58.8 PK                 | 74.0           | -15.2       | 2.39 V             | 158                  | 32.8             | 26.0                     |
| 4                                                    | 10600.00        | 44.4 AV                 | 54.0           | -9.6        | 2.39 V             | 158                  | 18.4             | 26.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 64 : 5320 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 106.7 PK                |                |             | 2.21 H             | 201                  | 91.8             | 14.9                     |
| 2                                                    | *5320.00        | 97.2 AV                 |                |             | 2.21 H             | 201                  | 82.3             | 14.9                     |
| 3                                                    | 5350.00         | 55.4 PK                 | 74.0           | -18.6       | 2.21 H             | 201                  | 40.4             | 15.0                     |
| 4                                                    | 5350.00         | 44.8 AV                 | 54.0           | -9.2        | 2.21 H             | 201                  | 29.8             | 15.0                     |
| 5                                                    | 10640.00        | 60.7 PK                 | 74.0           | -13.3       | 1.88 H             | 158                  | 33.8             | 26.9                     |
| 6                                                    | 10640.00        | 46.3 AV                 | 54.0           | -7.7        | 1.88 H             | 158                  | 19.4             | 26.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 117.0 PK                |                |             | 1.53 V             | 268                  | 102.1            | 14.9                     |
| 2                                                    | *5320.00        | 108.0 AV                |                |             | 1.53 V             | 268                  | 93.1             | 14.9                     |
| 3                                                    | 5350.00         | 57.8 PK                 | 74.0           | -16.2       | 1.53 V             | 268                  | 42.8             | 15.0                     |
| 4                                                    | 5350.00         | 47.8 AV                 | 54.0           | -6.2        | 1.53 V             | 268                  | 32.8             | 15.0                     |
| 5                                                    | 10640.00        | 61.8 PK                 | 74.0           | -12.2       | 1.78 V             | 71                   | 34.9             | 26.9                     |
| 6                                                    | 10640.00        | 47.4 AV                 | 54.0           | -6.6        | 1.78 V             | 71                   | 20.5             | 26.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 100 : 5500 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 55.9 PK                 | 74.0           | -18.1       | 2.20 H             | 201                  | 40.6             | 15.3                     |
| 2                                                    | 5460.00         | 45.1 AV                 | 54.0           | -8.9        | 2.20 H             | 201                  | 29.8             | 15.3                     |
| 3                                                    | #5470.00        | 56.5 PK                 | 68.2           | -11.7       | 2.20 H             | 201                  | 41.1             | 15.4                     |
| 4                                                    | *5500.00        | 108.2 PK                |                |             | 2.20 H             | 201                  | 92.7             | 15.5                     |
| 5                                                    | *5500.00        | 98.6 AV                 |                |             | 2.20 H             | 201                  | 83.1             | 15.5                     |
| 6                                                    | 11000.00        | 62.2 PK                 | 74.0           | -11.8       | 1.87 H             | 158                  | 35.0             | 27.2                     |
| 7                                                    | 11000.00        | 46.0 AV                 | 54.0           | -8.0        | 1.87 H             | 158                  | 18.8             | 27.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 56.1 PK                 | 74.0           | -17.9       | 1.52 V             | 268                  | 40.8             | 15.3                     |
| 2                                                    | 5460.00         | 45.3 AV                 | 54.0           | -8.7        | 1.52 V             | 268                  | 30.0             | 15.3                     |
| 3                                                    | #5470.00        | 57.0 PK                 | 68.2           | -11.2       | 1.52 V             | 268                  | 41.6             | 15.4                     |
| 4                                                    | *5500.00        | 118.4 PK                |                |             | 1.52 V             | 268                  | 102.9            | 15.5                     |
| 5                                                    | *5500.00        | 108.3 AV                |                |             | 1.52 V             | 268                  | 92.8             | 15.5                     |
| 6                                                    | 11000.00        | 63.3 PK                 | 74.0           | -10.7       | 1.77 V             | 79                   | 36.1             | 27.2                     |
| 7                                                    | 11000.00        | 47.1 AV                 | 54.0           | -6.9        | 1.77 V             | 79                   | 19.9             | 27.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 116 : 5580 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 103.1 PK                |                |             | 1.36 H             | 247                  | 87.6             | 15.5                     |
| 2                                                    | *5580.00        | 94.2 AV                 |                |             | 1.36 H             | 247                  | 78.7             | 15.5                     |
| 3                                                    | 11160.00        | 60.2 PK                 | 74.0           | -13.8       | 3.50 H             | 108                  | 32.4             | 27.8                     |
| 4                                                    | 11160.00        | 45.8 AV                 | 54.0           | -8.2        | 3.50 H             | 108                  | 18.0             | 27.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 116.2 PK                |                |             | 1.65 V             | 88                   | 100.7            | 15.5                     |
| 2                                                    | *5580.00        | 107.7 AV                |                |             | 1.65 V             | 88                   | 92.2             | 15.5                     |
| 3                                                    | 11160.00        | 61.3 PK                 | 74.0           | -12.7       | 2.37 V             | 156                  | 33.5             | 27.8                     |
| 4                                                    | 11160.00        | 46.9 AV                 | 54.0           | -7.1        | 2.37 V             | 156                  | 19.1             | 27.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 140 : 5700 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 107.6 PK                |                |             | 2.30 H             | 208                  | 92.5             | 15.1                     |
| 2                                                    | *5700.00        | 97.9 AV                 |                |             | 2.30 H             | 208                  | 82.8             | 15.1                     |
| 3                                                    | #5725.00        | 55.5 PK                 | 68.2           | -12.7       | 2.30 H             | 208                  | 40.4             | 15.1                     |
| 4                                                    | 11400.00        | 62.7 PK                 | 74.0           | -11.3       | 1.97 H             | 165                  | 34.7             | 28.0                     |
| 5                                                    | 11400.00        | 46.5 AV                 | 54.0           | -7.5        | 1.97 H             | 165                  | 18.5             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 117.7 PK                |                |             | 1.62 V             | 275                  | 102.6            | 15.1                     |
| 2                                                    | *5700.00        | 107.9 AV                |                |             | 1.62 V             | 275                  | 92.8             | 15.1                     |
| 3                                                    | #5725.00        | 57.0 PK                 | 68.2           | -11.2       | 1.62 V             | 275                  | 41.9             | 15.1                     |
| 4                                                    | 11400.00        | 63.8 PK                 | 74.0           | -10.2       | 1.87 V             | 78                   | 35.8             | 28.0                     |
| 5                                                    | 11400.00        | 47.6 AV                 | 54.0           | -6.4        | 1.87 V             | 78                   | 19.6             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 144 : 5720 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.4 PK                 | 68.2           | -11.8       | 2.10 H             | 211                  | 41.0             | 15.4                     |
| 2                                                    | *5720.00        | 109.8 PK                |                |             | 2.10 H             | 211                  | 94.7             | 15.1                     |
| 3                                                    | *5720.00        | 99.0 AV                 |                |             | 2.10 H             | 211                  | 83.9             | 15.1                     |
| 4                                                    | 11440.00        | 61.8 PK                 | 74.0           | -12.2       | 1.77 H             | 168                  | 33.9             | 27.9                     |
| 5                                                    | 11440.00        | 47.4 AV                 | 54.0           | -6.6        | 1.77 H             | 168                  | 19.5             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.6 PK                 | 68.2           | -11.6       | 1.42 V             | 278                  | 41.2             | 15.4                     |
| 2                                                    | *5720.00        | 119.9 PK                |                |             | 1.42 V             | 278                  | 104.8            | 15.1                     |
| 3                                                    | *5720.00        | 109.7 AV                |                |             | 1.42 V             | 278                  | 94.6             | 15.1                     |
| 4                                                    | 11440.00        | 62.9 PK                 | 74.0           | -11.1       | 1.67 V             | 81                   | 35.0             | 27.9                     |
| 5                                                    | 11440.00        | 48.5 AV                 | 54.0           | -5.5        | 1.67 V             | 81                   | 20.6             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 149 : 5745 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5552.85        | 55.9 PK                 | 68.2           | -12.3       | 2.12 H             | 204                  | 40.3             | 15.6                     |
| 2                                                    | *5745.00        | 119.0 PK                |                |             | 2.12 H             | 204                  | 103.9            | 15.1                     |
| 3                                                    | *5745.00        | 111.1 AV                |                |             | 2.12 H             | 204                  | 96.0             | 15.1                     |
| 4                                                    | #5976.07        | 56.0 PK                 | 68.2           | -12.2       | 2.12 H             | 204                  | 40.9             | 15.1                     |
| 5                                                    | 11490.00        | 61.8 PK                 | 74.0           | -12.2       | 1.72 H             | 162                  | 33.9             | 27.9                     |
| 6                                                    | 11490.00        | 47.4 AV                 | 54.0           | -6.6        | 1.72 H             | 162                  | 19.5             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5631.23        | 56.1 PK                 | 68.2           | -12.1       | 1.44 V             | 271                  | 40.8             | 15.3                     |
| 2                                                    | *5745.00        | 129.3 PK                |                |             | 1.44 V             | 271                  | 114.2            | 15.1                     |
| 3                                                    | *5745.00        | 121.5 AV                |                |             | 1.44 V             | 271                  | 106.4            | 15.1                     |
| 4                                                    | #5939.02        | 56.4 PK                 | 68.2           | -11.8       | 1.44 V             | 271                  | 41.2             | 15.2                     |
| 5                                                    | 11490.00        | 62.9 PK                 | 74.0           | -11.1       | 1.69 V             | 74                   | 35.0             | 27.9                     |
| 6                                                    | 11490.00        | 48.5 AV                 | 54.0           | -5.5        | 1.69 V             | 74                   | 20.6             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 157 : 5785 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5626.40        | 55.6 PK                 | 68.2           | -12.6       | 1.36 H             | 245                  | 40.2             | 15.4                     |
| 2                                                    | *5785.00        | 116.5 PK                |                |             | 1.36 H             | 245                  | 101.5            | 15.0                     |
| 3                                                    | *5785.00        | 109.3 AV                |                |             | 1.36 H             | 245                  | 94.3             | 15.0                     |
| 4                                                    | #5952.40        | 55.5 PK                 | 68.2           | -12.7       | 1.36 H             | 245                  | 40.2             | 15.3                     |
| 5                                                    | 11570.00        | 61.5 PK                 | 74.0           | -12.5       | 3.52 H             | 100                  | 33.3             | 28.2                     |
| 6                                                    | 11570.00        | 47.1 AV                 | 54.0           | -6.9        | 3.52 H             | 100                  | 18.9             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5620.40        | 56.5 PK                 | 68.2           | -11.7       | 1.63 V             | 88                   | 41.2             | 15.3                     |
| 2                                                    | *5785.00        | 128.6 PK                |                |             | 1.63 V             | 88                   | 113.6            | 15.0                     |
| 3                                                    | *5785.00        | 120.9 AV                |                |             | 1.63 V             | 88                   | 105.9            | 15.0                     |
| 4                                                    | #5942.00        | 58.1 PK                 | 68.2           | -10.1       | 1.63 V             | 88                   | 42.9             | 15.2                     |
| 5                                                    | 11570.00        | 62.6 PK                 | 74.0           | -11.4       | 2.39 V             | 150                  | 34.4             | 28.2                     |
| 6                                                    | 11570.00        | 48.2 AV                 | 54.0           | -5.8        | 2.39 V             | 150                  | 20.0             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                             |                                          |                                                                      |
|------------------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 52-tone RU | <b>Channel</b>                           | CH 165 : 5825 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz              | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz              | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                      |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5623.15        | 55.0 PK                 | 68.2           | -13.2       | 2.16 H             | 203                  | 39.8             | 15.2                     |
| 2                                                    | *5825.00        | 118.5 PK                |                |             | 2.16 H             | 203                  | 103.6            | 14.9                     |
| 3                                                    | *5825.00        | 110.8 AV                |                |             | 2.16 H             | 203                  | 95.9             | 14.9                     |
| 4                                                    | #6015.02        | 56.4 PK                 | 68.2           | -11.8       | 2.16 H             | 203                  | 41.2             | 15.2                     |
| 5                                                    | 11650.00        | 61.8 PK                 | 74.0           | -12.2       | 1.83 H             | 160                  | 33.6             | 28.2                     |
| 6                                                    | 11650.00        | 47.4 AV                 | 54.0           | -6.6        | 1.83 H             | 160                  | 19.2             | 28.2                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5646.90        | 56.2 PK                 | 68.2           | -12.0       | 1.48 V             | 270                  | 41.0             | 15.2                     |
| 2                                                    | *5825.00        | 128.8 PK                |                |             | 1.48 V             | 270                  | 113.9            | 14.9                     |
| 3                                                    | *5825.00        | 121.0 AV                |                |             | 1.48 V             | 270                  | 106.1            | 14.9                     |
| 4                                                    | #5937.12        | 59.1 PK                 | 68.2           | -9.1        | 1.48 V             | 270                  | 43.9             | 15.2                     |
| 5                                                    | 11650.00        | 62.9 PK                 | 74.0           | -11.1       | 1.73 V             | 73                   | 34.7             | 28.2                     |
| 6                                                    | 11650.00        | 48.5 AV                 | 54.0           | -5.5        | 1.73 V             | 73                   | 20.3             | 28.2                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 36 : 5180 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.1 PK                 | 74.0           | -18.9       | 1.44 H             | 248                  | 41.3             | 13.8                     |
| 2                                                    | 5150.00         | 44.1 AV                 | 54.0           | -9.9        | 1.44 H             | 248                  | 30.3             | 13.8                     |
| 3                                                    | *5180.00        | 103.5 PK                |                |             | 1.44 H             | 248                  | 89.6             | 13.9                     |
| 4                                                    | *5180.00        | 94.0 AV                 |                |             | 1.44 H             | 248                  | 80.1             | 13.9                     |
| 5                                                    | #10360.00       | 59.1 PK                 | 68.2           | -9.1        | 3.42 H             | 109                  | 34.0             | 25.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 63.0 PK                 | 74.0           | -11.0       | 1.73 V             | 91                   | 49.2             | 13.8                     |
| 2                                                    | 5150.00         | 47.8 AV                 | 54.0           | -6.2        | 1.73 V             | 91                   | 34.0             | 13.8                     |
| 3                                                    | *5180.00        | 116.2 PK                |                |             | 1.73 V             | 91                   | 102.3            | 13.9                     |
| 4                                                    | *5180.00        | 107.9 AV                |                |             | 1.73 V             | 91                   | 94.0             | 13.9                     |
| 5                                                    | #10360.00       | 60.2 PK                 | 68.2           | -8.0        | 2.47 V             | 159                  | 35.1             | 25.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 40 : 5200 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 105.8 PK                |                |             | 2.26 H             | 207                  | 91.7             | 14.1                     |
| 2                                                    | *5200.00        | 96.0 AV                 |                |             | 2.26 H             | 207                  | 81.9             | 14.1                     |
| 3                                                    | #10400.00       | 61.2 PK                 | 68.2           | -7.0        | 1.93 H             | 164                  | 35.1             | 26.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5200.00        | 116.1 PK                |                |             | 1.57 V             | 273                  | 102.0            | 14.1                     |
| 2                                                    | *5200.00        | 107.8 AV                |                |             | 1.57 V             | 273                  | 93.7             | 14.1                     |
| 3                                                    | #10400.00       | 62.3 PK                 | 68.2           | -5.9        | 1.81 V             | 74                   | 36.2             | 26.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 48 : 5240 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 106.7 PK                |                |             | 2.23 H             | 207                  | 92.3             | 14.4                     |
| 2                                                    | *5240.00        | 97.1 AV                 |                |             | 2.23 H             | 207                  | 82.7             | 14.4                     |
| 3                                                    | 5350.00         | 55.3 PK                 | 74.0           | -18.7       | 2.23 H             | 207                  | 40.3             | 15.0                     |
| 4                                                    | 5350.00         | 44.5 AV                 | 54.0           | -9.5        | 2.23 H             | 207                  | 29.5             | 15.0                     |
| 5                                                    | #10480.00       | 60.9 PK                 | 68.2           | -7.3        | 1.90 H             | 164                  | 34.6             | 26.3                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5240.00        | 116.9 PK                |                |             | 1.55 V             | 270                  | 102.5            | 14.4                     |
| 2                                                    | *5240.00        | 107.8 AV                |                |             | 1.55 V             | 270                  | 93.4             | 14.4                     |
| 3                                                    | 5350.00         | 55.5 PK                 | 74.0           | -18.5       | 1.55 V             | 270                  | 40.5             | 15.0                     |
| 4                                                    | 5350.00         | 44.7 AV                 | 54.0           | -9.3        | 1.55 V             | 270                  | 29.7             | 15.0                     |
| 5                                                    | #10480.00       | 62.0 PK                 | 68.2           | -6.2        | 1.82 V             | 77                   | 35.7             | 26.3                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 52 : 5260 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 55.2 PK                 | 74.0           | -18.8       | 1.42 H             | 249                  | 41.4             | 13.8                     |
| 2                                                    | 5150.00         | 43.9 AV                 | 54.0           | -10.1       | 1.42 H             | 249                  | 30.1             | 13.8                     |
| 3                                                    | *5260.00        | 106.7 PK                |                |             | 1.42 H             | 249                  | 92.0             | 14.7                     |
| 4                                                    | *5260.00        | 97.6 AV                 |                |             | 1.42 H             | 249                  | 82.9             | 14.7                     |
| 5                                                    | #10520.00       | 62.0 PK                 | 68.2           | -6.2        | 3.44 H             | 110                  | 36.2             | 25.8                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5150.00         | 56.8 PK                 | 74.0           | -17.2       | 1.71 V             | 92                   | 43.0             | 13.8                     |
| 2                                                    | 5150.00         | 45.6 AV                 | 54.0           | -8.4        | 1.71 V             | 92                   | 31.8             | 13.8                     |
| 3                                                    | *5260.00        | 119.2 PK                |                |             | 1.71 V             | 92                   | 104.5            | 14.7                     |
| 4                                                    | *5260.00        | 109.7 AV                |                |             | 1.71 V             | 92                   | 95.0             | 14.7                     |
| 5                                                    | #10520.00       | 63.1 PK                 | 68.2           | -5.1        | 2.45 V             | 160                  | 37.3             | 25.8                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 60 : 5300 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 108.5 PK                |                |             | 2.25 H             | 203                  | 93.5             | 15.0                     |
| 2                                                    | *5300.00        | 97.6 AV                 |                |             | 2.25 H             | 203                  | 82.6             | 15.0                     |
| 3                                                    | 10600.00        | 61.4 PK                 | 74.0           | -12.6       | 1.90 H             | 158                  | 34.7             | 26.7                     |
| 4                                                    | 10600.00        | 47.0 AV                 | 54.0           | -7.0        | 1.90 H             | 158                  | 20.3             | 26.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5300.00        | 118.8 PK                |                |             | 1.58 V             | 274                  | 103.8            | 15.0                     |
| 2                                                    | *5300.00        | 109.3 AV                |                |             | 1.58 V             | 274                  | 94.3             | 15.0                     |
| 3                                                    | 10600.00        | 62.5 PK                 | 74.0           | -11.5       | 1.83 V             | 73                   | 35.8             | 26.7                     |
| 4                                                    | 10600.00        | 48.1 AV                 | 54.0           | -5.9        | 1.83 V             | 73                   | 21.4             | 26.7                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 64 : 5320 MHz                                                     |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 108.1 PK                |                |             | 2.29 H             | 202                  | 93.2             | 14.9                     |
| 2                                                    | *5320.00        | 98.7 AV                 |                |             | 2.29 H             | 202                  | 83.8             | 14.9                     |
| 3                                                    | 5350.00         | 56.2 PK                 | 74.0           | -17.8       | 2.29 H             | 202                  | 41.2             | 15.0                     |
| 4                                                    | 5350.00         | 46.8 AV                 | 54.0           | -7.2        | 2.29 H             | 202                  | 31.8             | 15.0                     |
| 5                                                    | 10640.00        | 62.3 PK                 | 74.0           | -11.7       | 1.96 H             | 159                  | 35.4             | 26.9                     |
| 6                                                    | 10640.00        | 47.9 AV                 | 54.0           | -6.1        | 1.96 H             | 159                  | 21.0             | 26.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5320.00        | 118.6 PK                |                |             | 1.61 V             | 269                  | 103.7            | 14.9                     |
| 2                                                    | *5320.00        | 108.3 AV                |                |             | 1.61 V             | 269                  | 93.4             | 14.9                     |
| 3                                                    | 5350.00         | 61.1 PK                 | 74.0           | -12.9       | 1.61 V             | 269                  | 46.1             | 15.0                     |
| 4                                                    | 5350.00         | 47.2 AV                 | 54.0           | -6.8        | 1.61 V             | 269                  | 32.2             | 15.0                     |
| 5                                                    | 10640.00        | 63.4 PK                 | 74.0           | -10.6       | 1.86 V             | 78                   | 36.5             | 26.9                     |
| 6                                                    | 10640.00        | 49.0 AV                 | 54.0           | -5.0        | 1.86 V             | 78                   | 22.1             | 26.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 100 : 5500 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 56.4 PK                 | 74.0           | -17.6       | 1.42 H             | 248                  | 41.1             | 15.3                     |
| 2                                                    | 5460.00         | 45.3 AV                 | 54.0           | -8.7        | 1.42 H             | 248                  | 30.0             | 15.3                     |
| 3                                                    | #5470.00        | 56.2 PK                 | 68.2           | -12.0       | 1.42 H             | 248                  | 40.8             | 15.4                     |
| 4                                                    | *5500.00        | 105.0 PK                |                |             | 1.42 H             | 248                  | 89.4             | 15.6                     |
| 5                                                    | *5500.00        | 96.9 AV                 |                |             | 1.42 H             | 248                  | 81.3             | 15.6                     |
| 6                                                    | 11000.00        | 61.1 PK                 | 74.0           | -12.9       | 2.58 H             | 109                  | 34.2             | 26.9                     |
| 7                                                    | 11000.00        | 46.7 AV                 | 54.0           | -7.3        | 2.58 H             | 109                  | 19.8             | 26.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | 5460.00         | 59.6 PK                 | 74.0           | -14.4       | 1.71 V             | 91                   | 44.3             | 15.3                     |
| 2                                                    | 5460.00         | 49.5 AV                 | 54.0           | -4.5        | 1.71 V             | 91                   | 34.2             | 15.3                     |
| 3                                                    | #5470.00        | 60.8 PK                 | 68.2           | -7.4        | 1.71 V             | 91                   | 45.4             | 15.4                     |
| 4                                                    | *5500.00        | 118.1 PK                |                |             | 1.71 V             | 91                   | 102.5            | 15.6                     |
| 5                                                    | *5500.00        | 109.7 AV                |                |             | 1.71 V             | 91                   | 94.1             | 15.6                     |
| 6                                                    | 11000.00        | 62.2 PK                 | 74.0           | -11.8       | 2.44 V             | 161                  | 35.3             | 26.9                     |
| 7                                                    | 11000.00        | 47.8 AV                 | 54.0           | -6.2        | 2.44 V             | 161                  | 20.9             | 26.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 116 : 5580 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 107.2 PK                |                |             | 2.21 H             | 202                  | 91.8             | 15.4                     |
| 2                                                    | *5580.00        | 98.5 AV                 |                |             | 2.21 H             | 202                  | 83.1             | 15.4                     |
| 3                                                    | 11160.00        | 61.9 PK                 | 74.0           | -12.1       | 1.94 H             | 159                  | 33.8             | 28.1                     |
| 4                                                    | 11160.00        | 47.5 AV                 | 54.0           | -6.5        | 1.94 H             | 159                  | 19.4             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5580.00        | 117.5 PK                |                |             | 1.53 V             | 275                  | 102.1            | 15.4                     |
| 2                                                    | *5580.00        | 109.1 AV                |                |             | 1.53 V             | 275                  | 93.7             | 15.4                     |
| 3                                                    | 11160.00        | 63.0 PK                 | 74.0           | -11.0       | 1.78 V             | 78                   | 34.9             | 28.1                     |
| 4                                                    | 11160.00        | 48.6 AV                 | 54.0           | -5.4        | 1.78 V             | 78                   | 20.5             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 140 : 5700 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 107.8 PK                |                |             | 2.28 H             | 202                  | 92.7             | 15.1                     |
| 2                                                    | *5700.00        | 97.6 AV                 |                |             | 2.28 H             | 202                  | 82.5             | 15.1                     |
| 3                                                    | #5725.00        | 56.0 PK                 | 68.2           | -12.2       | 2.28 H             | 202                  | 40.9             | 15.1                     |
| 4                                                    | 11400.00        | 61.6 PK                 | 74.0           | -12.4       | 1.95 H             | 159                  | 33.6             | 28.0                     |
| 5                                                    | 11400.00        | 47.2 AV                 | 54.0           | -6.8        | 1.95 H             | 159                  | 19.2             | 28.0                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | *5700.00        | 118.0 PK                |                |             | 1.60 V             | 269                  | 102.9            | 15.1                     |
| 2                                                    | *5700.00        | 107.6 AV                |                |             | 1.60 V             | 269                  | 92.5             | 15.1                     |
| 3                                                    | #5725.00        | 57.2 PK                 | 68.2           | -11.0       | 1.60 V             | 269                  | 42.1             | 15.1                     |
| 4                                                    | 11400.00        | 62.7 PK                 | 74.0           | -11.3       | 1.85 V             | 78                   | 34.7             | 28.0                     |
| 5                                                    | 11400.00        | 48.3 AV                 | 54.0           | -5.7        | 1.85 V             | 78                   | 20.3             | 28.0                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 144 : 5720 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.1 PK                 | 68.2           | -12.1       | 2.20 H             | 198                  | 40.7             | 15.4                     |
| 2                                                    | *5720.00        | 108.9 PK                |                |             | 2.20 H             | 198                  | 93.8             | 15.1                     |
| 3                                                    | *5720.00        | 99.3 AV                 |                |             | 2.20 H             | 198                  | 84.2             | 15.1                     |
| 4                                                    | 11440.00        | 61.6 PK                 | 74.0           | -12.4       | 1.87 H             | 155                  | 33.7             | 27.9                     |
| 5                                                    | 11440.00        | 47.2 AV                 | 54.0           | -6.8        | 1.87 H             | 155                  | 19.3             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5470.00        | 56.4 PK                 | 68.2           | -11.8       | 1.52 V             | 265                  | 41.0             | 15.4                     |
| 2                                                    | *5720.00        | 119.1 PK                |                |             | 1.52 V             | 265                  | 104.0            | 15.1                     |
| 3                                                    | *5720.00        | 109.6 AV                |                |             | 1.52 V             | 265                  | 94.5             | 15.1                     |
| 4                                                    | 11440.00        | 62.7 PK                 | 74.0           | -11.3       | 1.57 V             | 68                   | 34.8             | 27.9                     |
| 5                                                    | 11440.00        | 48.3 AV                 | 54.0           | -5.7        | 1.57 V             | 68                   | 20.4             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 149 : 5745 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5587.52        | 55.0 PK                 | 68.2           | -13.2       | 2.36 H             | 208                  | 39.7             | 15.3                     |
| 2                                                    | *5745.00        | 116.4 PK                |                |             | 2.36 H             | 208                  | 101.3            | 15.1                     |
| 3                                                    | *5745.00        | 107.6 AV                |                |             | 2.36 H             | 208                  | 92.5             | 15.1                     |
| 4                                                    | #5997.45        | 55.7 PK                 | 68.2           | -12.5       | 2.36 H             | 208                  | 40.6             | 15.1                     |
| 5                                                    | 11490.00        | 61.1 PK                 | 74.0           | -12.9       | 2.03 H             | 165                  | 33.2             | 27.9                     |
| 6                                                    | 11490.00        | 46.7 AV                 | 54.0           | -7.3        | 2.03 H             | 165                  | 18.8             | 27.9                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5649.27        | 55.4 PK                 | 68.2           | -12.8       | 1.44 V             | 269                  | 40.2             | 15.2                     |
| 2                                                    | *5745.00        | 126.6 PK                |                |             | 1.44 V             | 269                  | 111.5            | 15.1                     |
| 3                                                    | *5745.00        | 117.9 AV                |                |             | 1.44 V             | 269                  | 102.8            | 15.1                     |
| 4                                                    | #6020.25        | 55.9 PK                 | 68.2           | -12.3       | 1.44 V             | 269                  | 40.7             | 15.2                     |
| 5                                                    | 11490.00        | 62.2 PK                 | 74.0           | -11.8       | 1.93 V             | 78                   | 34.3             | 27.9                     |
| 6                                                    | 11490.00        | 47.8 AV                 | 54.0           | -6.2        | 1.93 V             | 78                   | 19.9             | 27.9                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 157 : 5785 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 27.6 °C, 75.3 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5635.98        | 55.4 PK                 | 68.2           | -12.8       | 2.14 H             | 197                  | 40.1             | 15.3                     |
| 2                                                    | *5785.00        | 116.2 PK                |                |             | 2.14 H             | 197                  | 101.3            | 14.9                     |
| 3                                                    | *5785.00        | 106.9 AV                |                |             | 2.14 H             | 197                  | 92.0             | 14.9                     |
| 4                                                    | #6008.85        | 55.6 PK                 | 68.2           | -12.6       | 2.14 H             | 197                  | 40.5             | 15.1                     |
| 5                                                    | 11570.00        | 61.2 PK                 | 74.0           | -12.8       | 1.81 H             | 155                  | 33.1             | 28.1                     |
| 6                                                    | 11570.00        | 46.8 AV                 | 54.0           | -7.2        | 1.81 H             | 155                  | 18.7             | 28.1                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5626.95        | 56.4 PK                 | 68.2           | -11.8       | 1.46 V             | 264                  | 41.1             | 15.3                     |
| 2                                                    | *5785.00        | 126.4 PK                |                |             | 1.46 V             | 264                  | 111.5            | 14.9                     |
| 3                                                    | *5785.00        | 117.5 AV                |                |             | 1.46 V             | 264                  | 102.6            | 14.9                     |
| 4                                                    | #5935.23        | 57.2 PK                 | 68.2           | -11.0       | 1.46 V             | 264                  | 42.0             | 15.2                     |
| 5                                                    | 11570.00        | 62.3 PK                 | 74.0           | -11.7       | 1.95 V             | 83                   | 34.2             | 28.1                     |
| 6                                                    | 11570.00        | 47.9 AV                 | 54.0           | -6.1        | 1.95 V             | 83                   | 19.8             | 28.1                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

|                        |                              |                                          |                                                                      |
|------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------|
| <b>RF Mode</b>         | 802.11be (EHT20) 106-tone RU | <b>Channel</b>                           | CH 165 : 5825 MHz                                                    |
| <b>Frequency Range</b> | 1 GHz ~ 40 GHz               | <b>Detector Function &amp; Bandwidth</b> | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
| <b>Input Power</b>     | 120 Vac, 60 Hz               | <b>Environmental Conditions</b>          | 22.7 °C, 73.8 % RH                                                   |
| <b>Tested By</b>       | Jed Wu                       |                                          |                                                                      |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5604.40        | 55.3 PK                 | 68.2           | -12.9       | 1.33 H             | 247                  | 40.0             | 15.3                     |
| 2                                                    | *5825.00        | 113.2 PK                |                |             | 1.33 H             | 247                  | 98.2             | 15.0                     |
| 3                                                    | *5825.00        | 104.7 AV                |                |             | 1.33 H             | 247                  | 89.7             | 15.0                     |
| 4                                                    | #5960.00        | 55.7 PK                 | 68.2           | -12.5       | 1.33 H             | 247                  | 40.5             | 15.2                     |
| 5                                                    | 11650.00        | 61.8 PK                 | 74.0           | -12.2       | 3.49 H             | 108                  | 33.1             | 28.7                     |
| 6                                                    | 11650.00        | 47.4 AV                 | 54.0           | -6.6        | 3.49 H             | 108                  | 18.7             | 28.7                     |
| Antenna Polarity & Test Distance : Vertical at 3 m   |                 |                         |                |             |                    |                      |                  |                          |
| No                                                   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                    | #5642.00        | 57.1 PK                 | 68.2           | -11.1       | 1.62 V             | 90                   | 41.8             | 15.3                     |
| 2                                                    | *5825.00        | 126.4 PK                |                |             | 1.62 V             | 90                   | 111.4            | 15.0                     |
| 3                                                    | *5825.00        | 118.5 AV                |                |             | 1.62 V             | 90                   | 103.5            | 15.0                     |
| 4                                                    | #5949.20        | 57.4 PK                 | 68.2           | -10.8       | 1.62 V             | 90                   | 42.1             | 15.3                     |
| 5                                                    | 11650.00        | 62.9 PK                 | 74.0           | -11.1       | 2.35 V             | 162                  | 34.2             | 28.7                     |
| 6                                                    | 11650.00        | 48.5 AV                 | 54.0           | -5.5        | 2.35 V             | 162                  | 19.8             | 28.7                     |

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

## Plot of Band Edge


### Mode A\_1Tx

|                 |                    |                               |                                                                      |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 4.5 GHz ~ 5.46 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|


#### 802.11a Channel 36

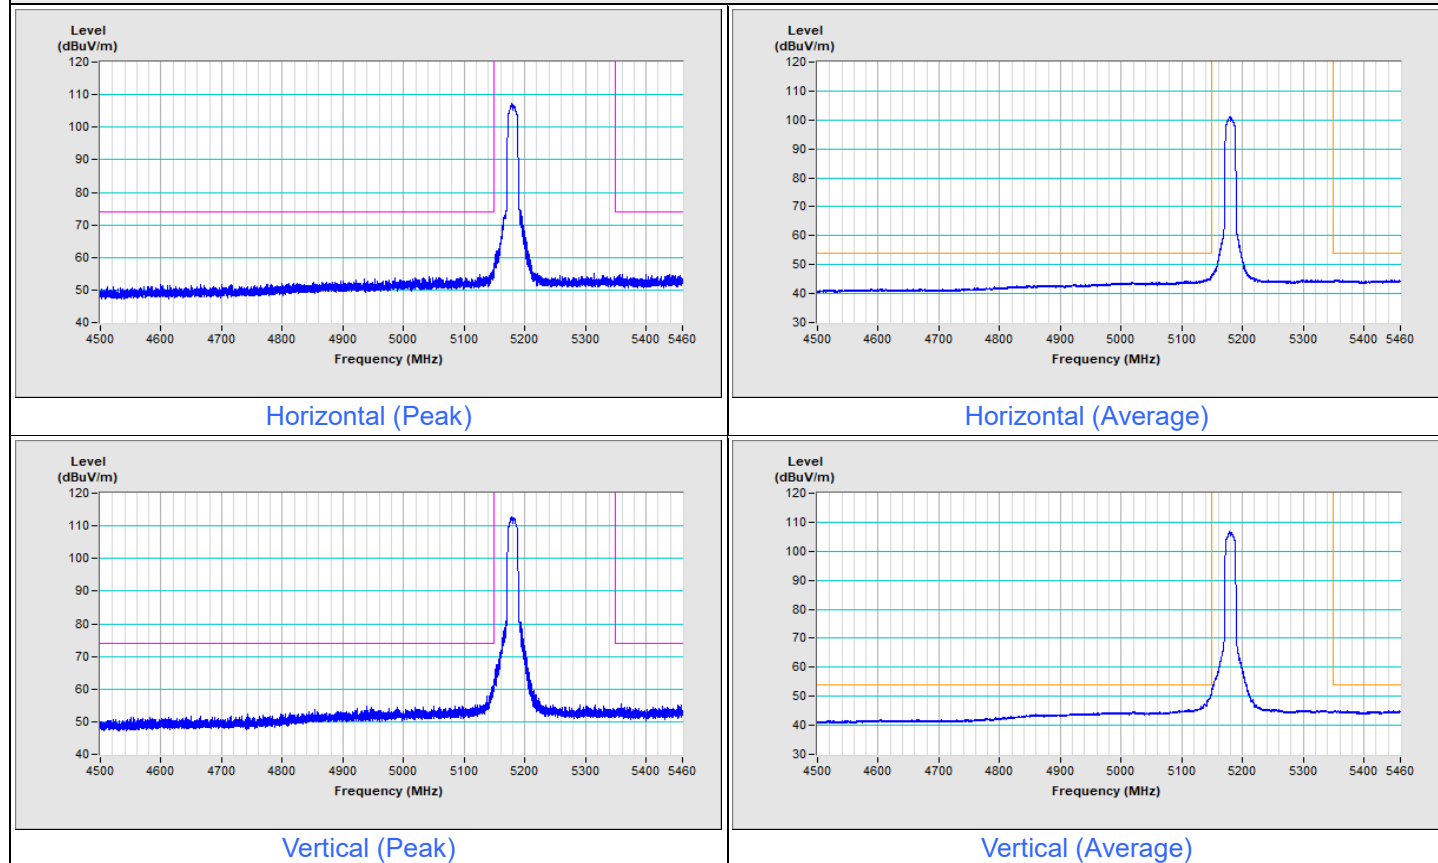


### 802.11a Channel 48

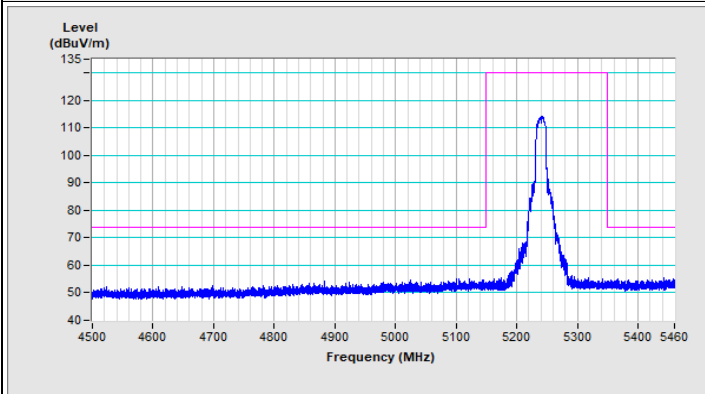


Horizontal (Peak)

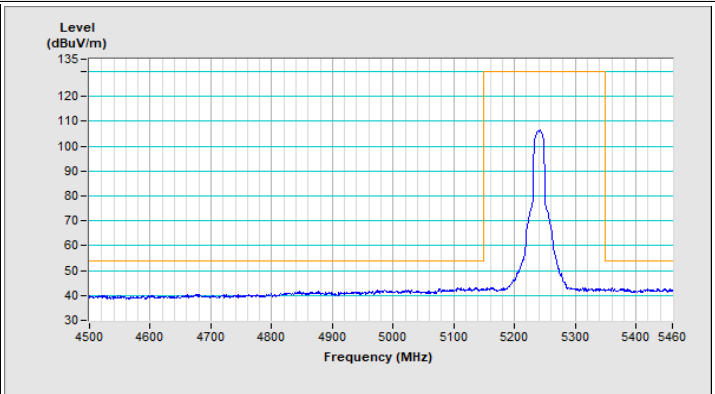

Horizontal (Average)

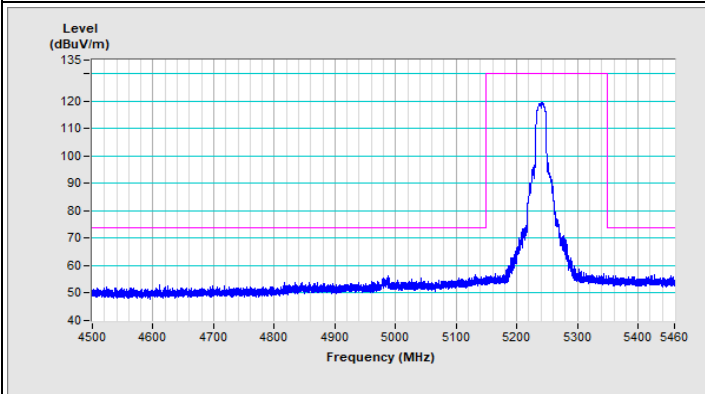


Vertical (Peak)

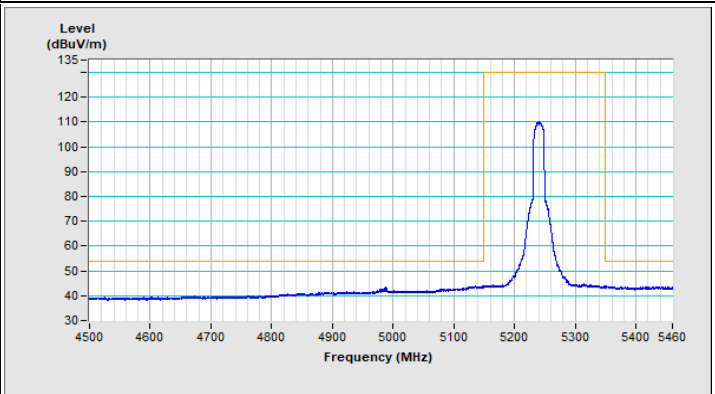


Vertical (Average)


### 802.11a Channel 52

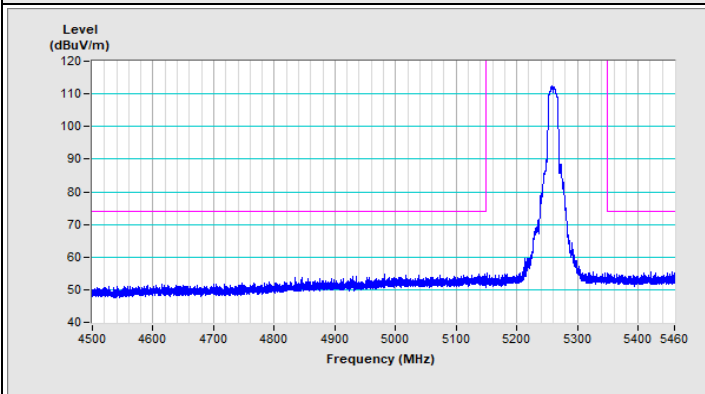


Horizontal (Peak)

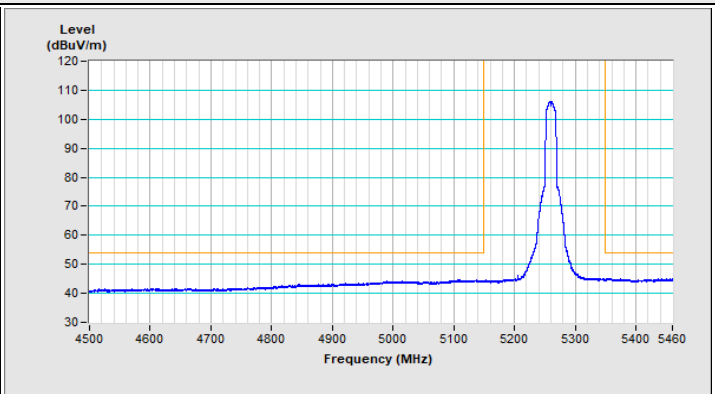

Horizontal (Average)

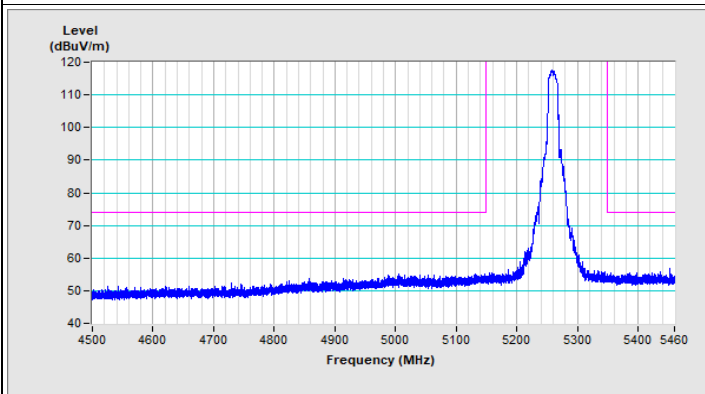


Vertical (Peak)

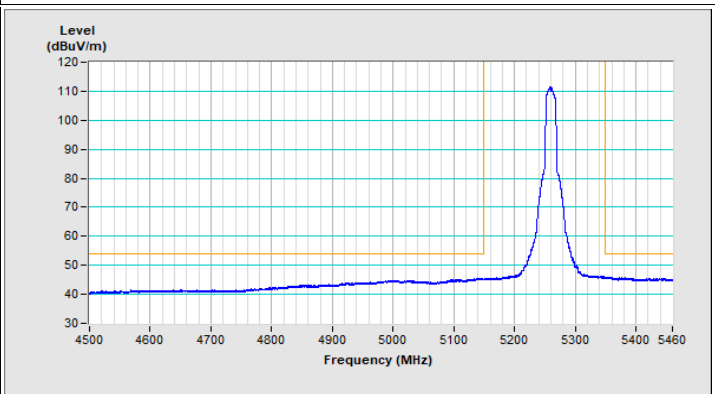


Vertical (Average)


## 802.11a Channel 64

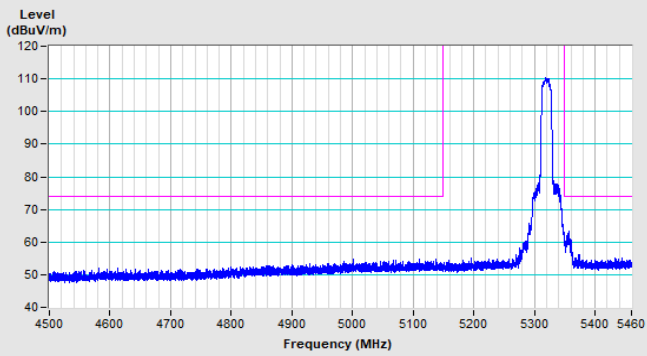


Horizontal (Peak)

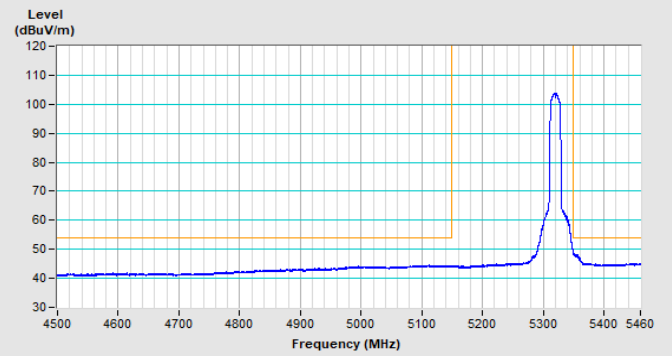

Horizontal (Average)

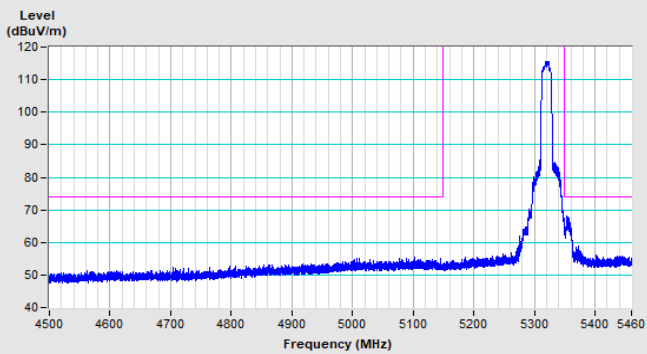


Vertical (Peak)

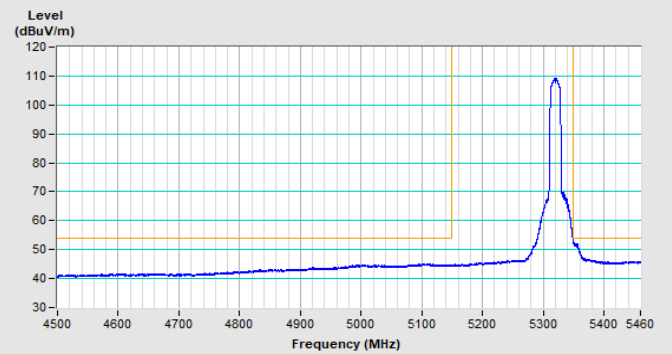


Vertical (Average)

|                 |                     |                               |                                                                      |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 5.35 GHz ~ 5.85 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|

### 802.11a Channel 100

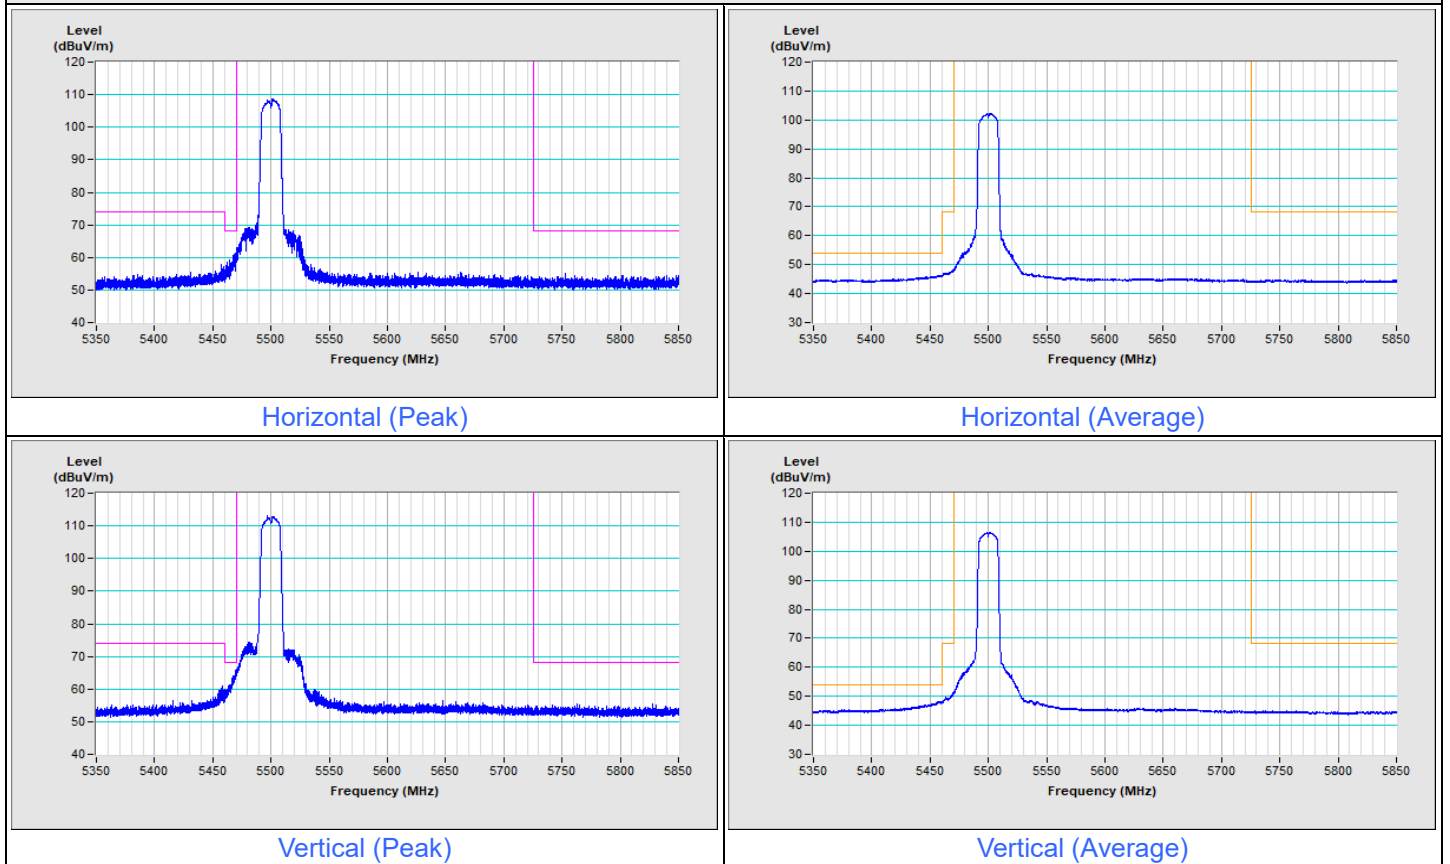


### 802.11a Channel 140

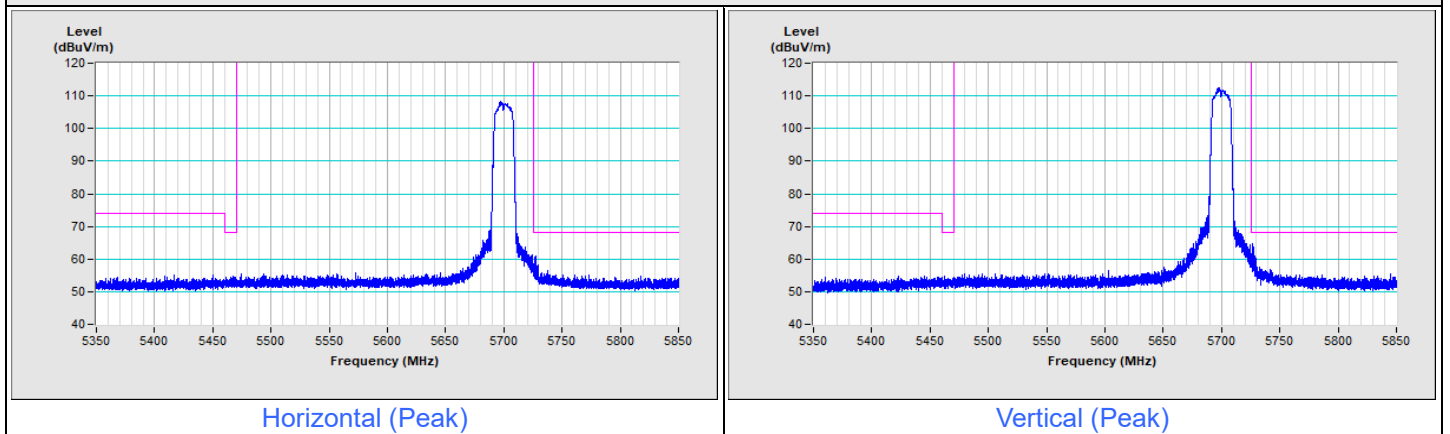


|                 |                     |                               |                                  |
|-----------------|---------------------|-------------------------------|----------------------------------|
| Frequency Range | 5.35 GHz ~ 5.95 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------|

#### 802.11a Channel 144

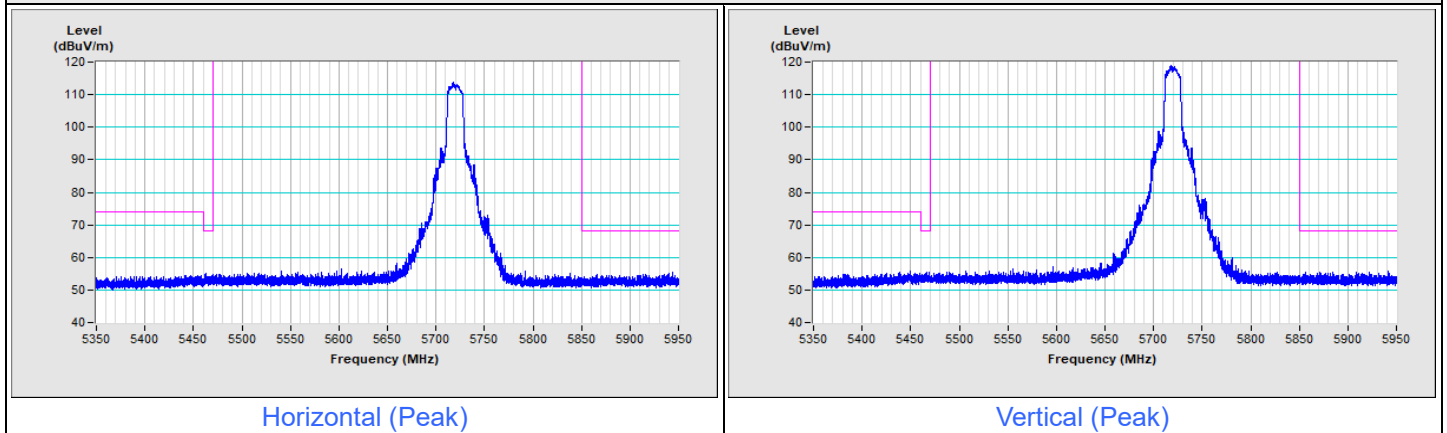



|                 |                 |                               |                                  |
|-----------------|-----------------|-------------------------------|----------------------------------|
| Frequency Range | 5.6 GHz ~ 6 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|-----------------|-------------------------------|----------------------------------|

#### 802.11a Channel 149

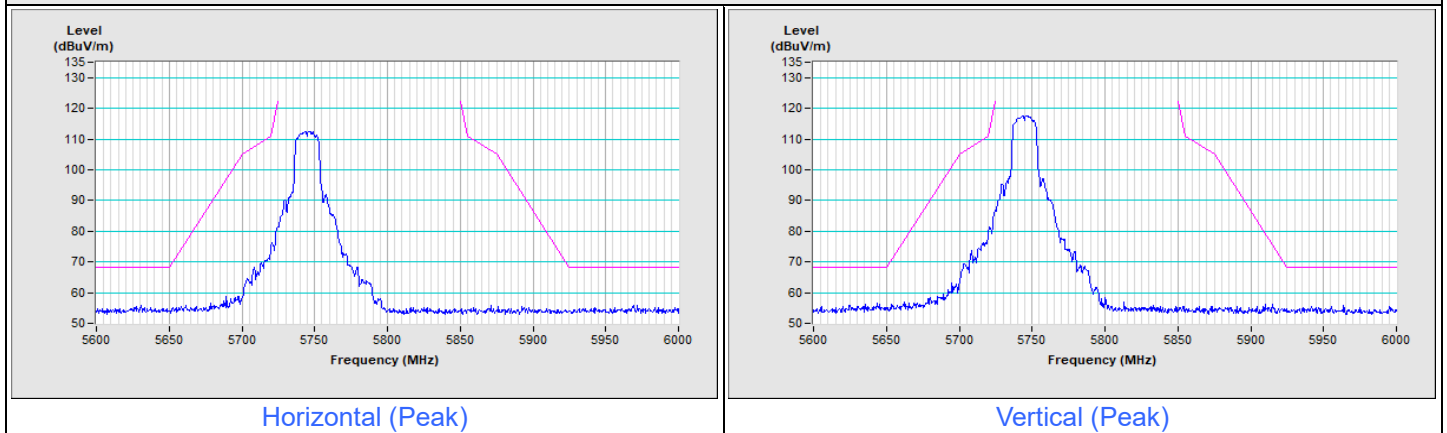


#### 802.11a Channel 157

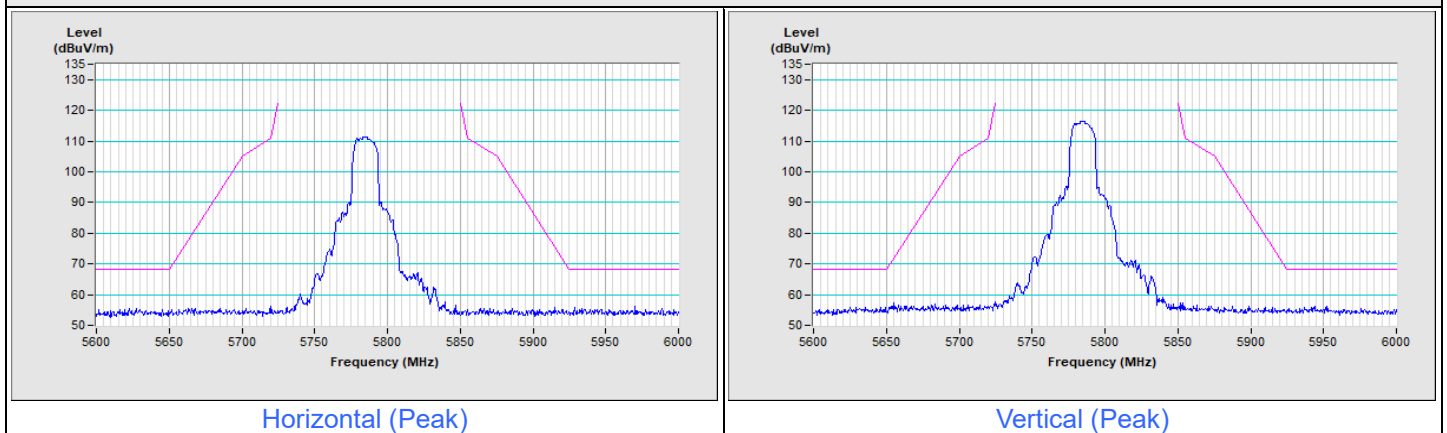

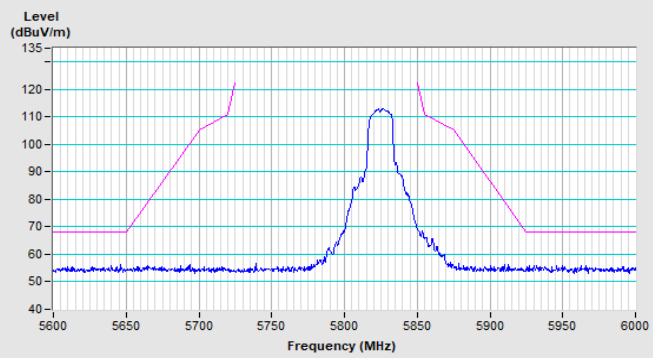**802.11a Channel 165**


Horizontal (Peak)

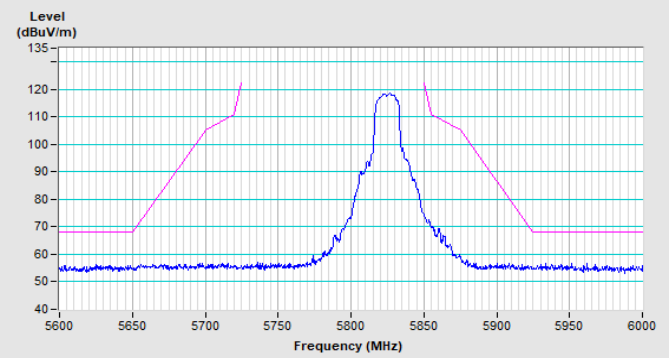


Vertical (Peak)

|                 |                    |                               |                                                                      |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 4.5 GHz ~ 5.46 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT20) Channel 36

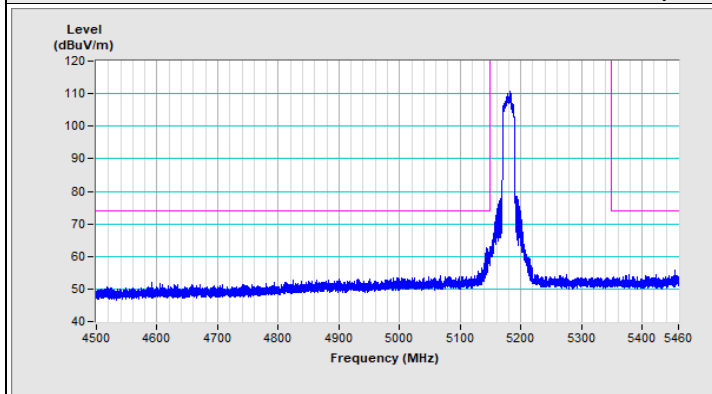


Horizontal (Peak)

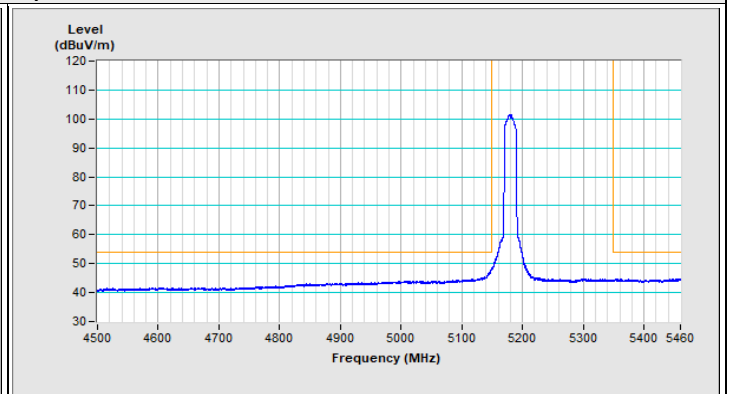

Horizontal (Average)

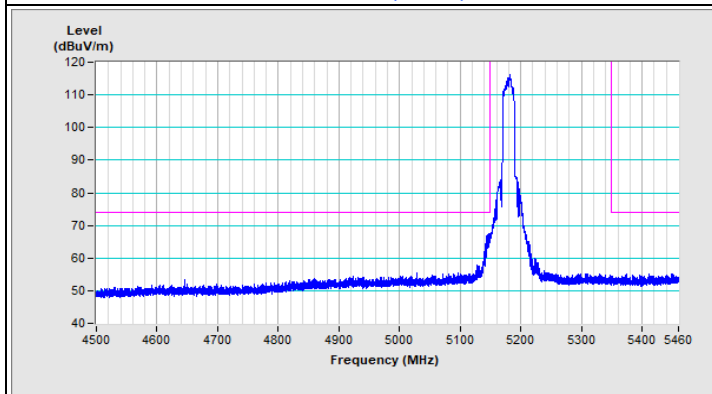


Vertical (Peak)

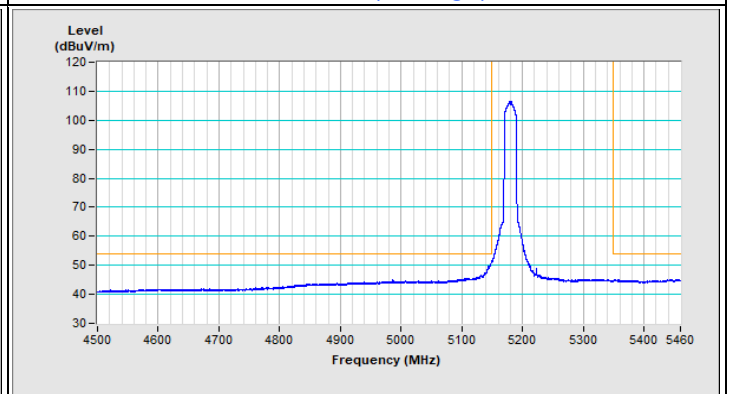


Vertical (Average)


### 802.11be (EHT20) Channel 48

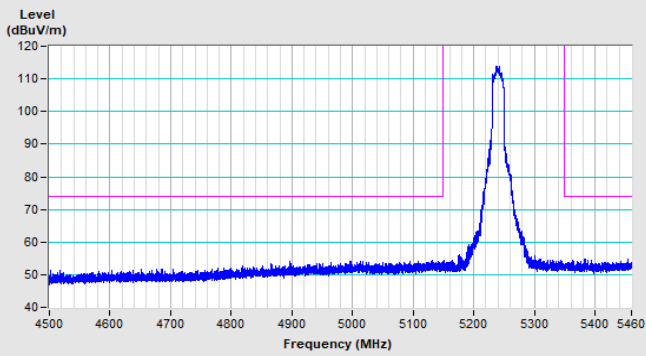


Horizontal (Peak)

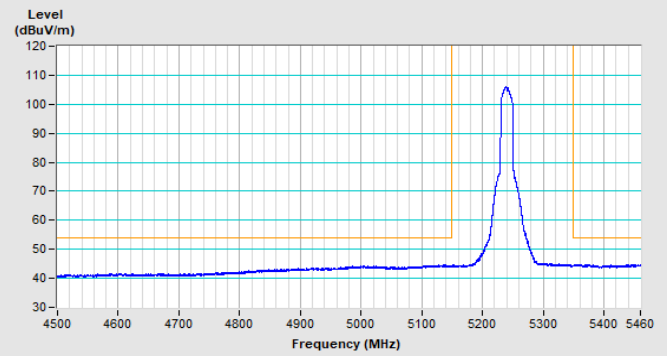

Horizontal (Average)

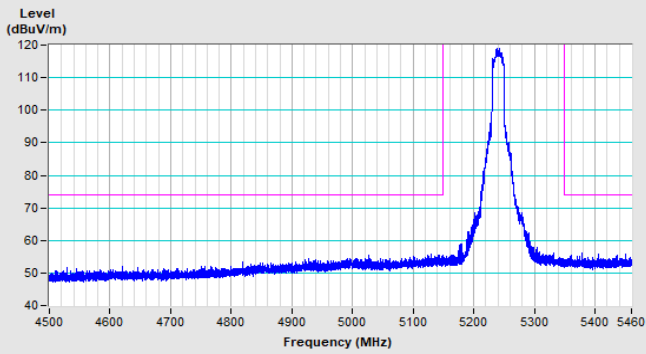


Vertical (Peak)

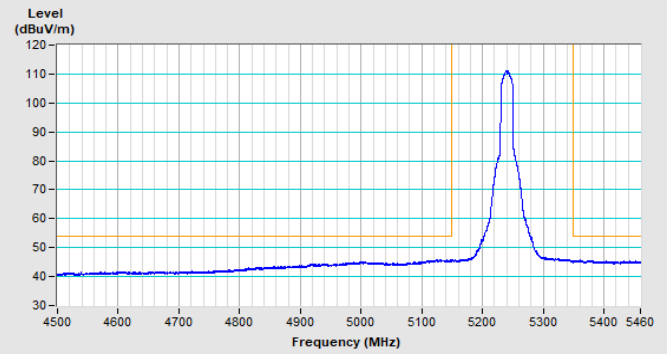


Vertical (Average)


### 802.11be (EHT20) Channel 52

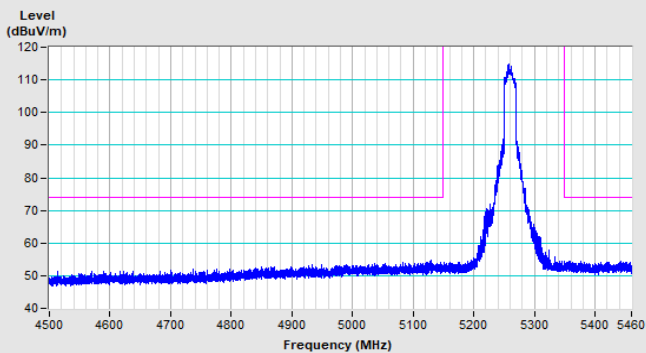


Horizontal (Peak)

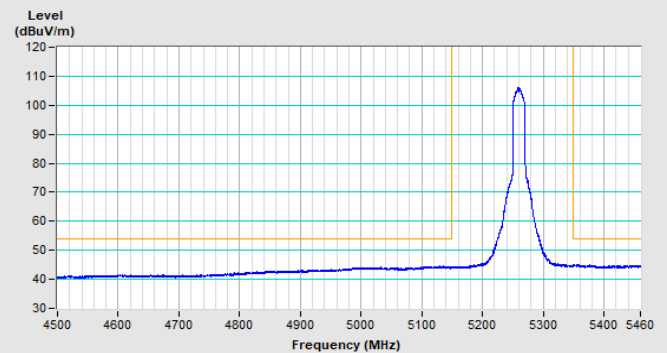

Horizontal (Average)

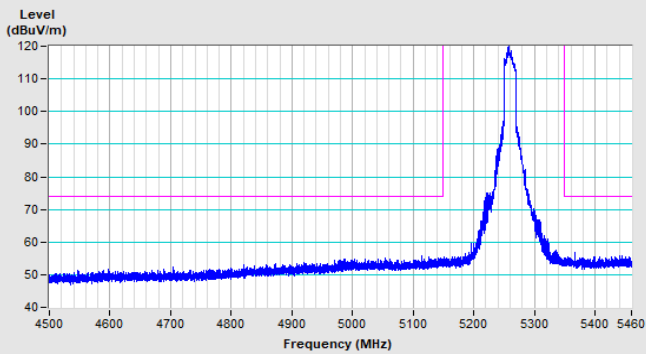


Vertical (Peak)

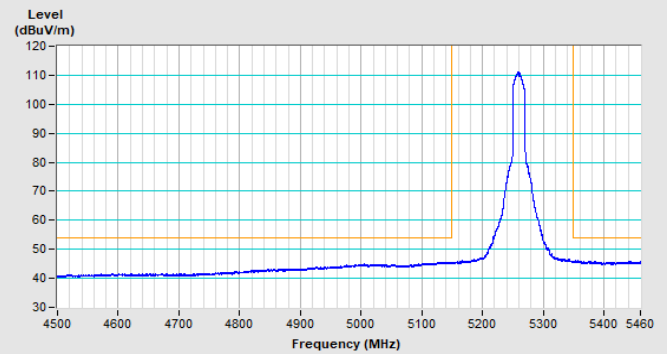


Vertical (Average)


### 802.11be (EHT20) Channel 64

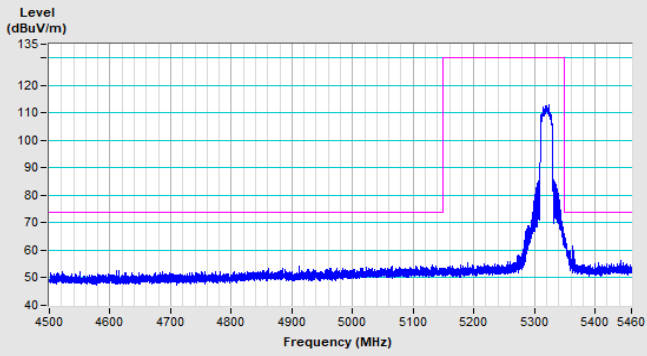


Horizontal (Peak)

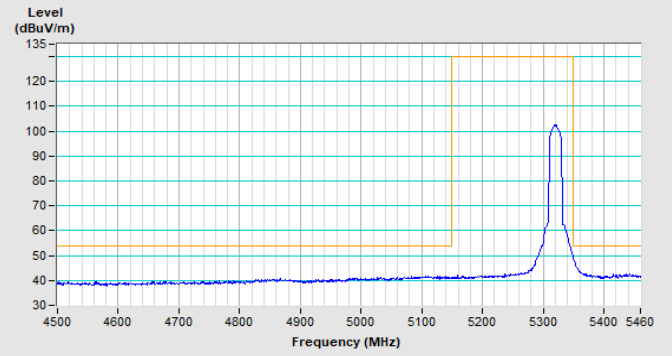

Horizontal (Average)

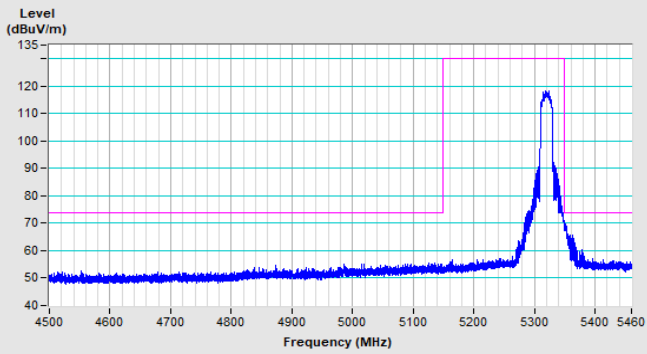


Vertical (Peak)

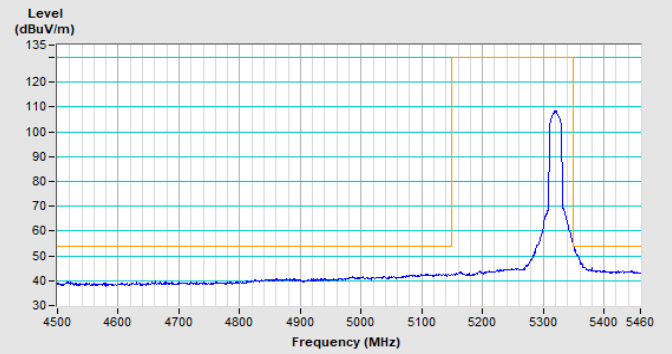


Vertical (Average)

|                 |                     |                               |                                                                      |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 5.35 GHz ~ 5.85 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT20) Channel 100

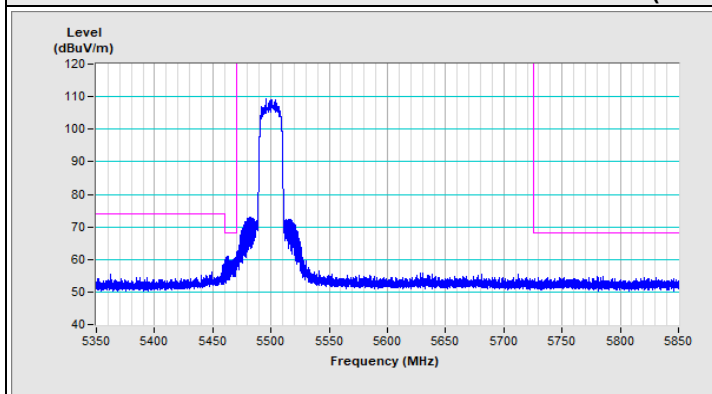


Horizontal (Peak)

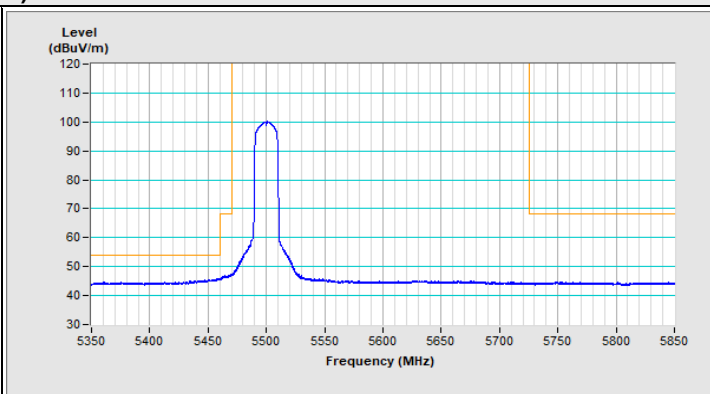

Horizontal (Average)

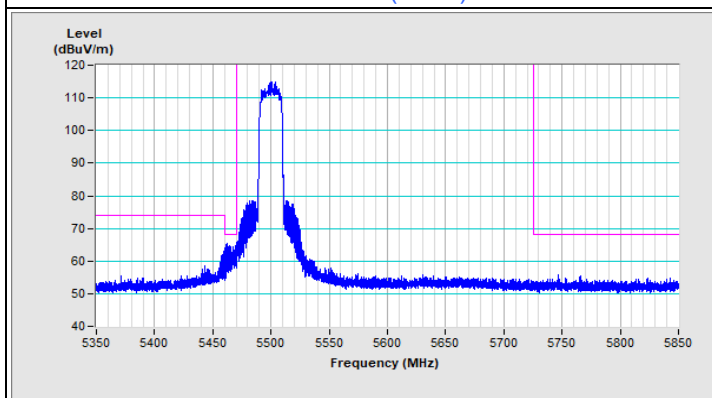


Vertical (Peak)

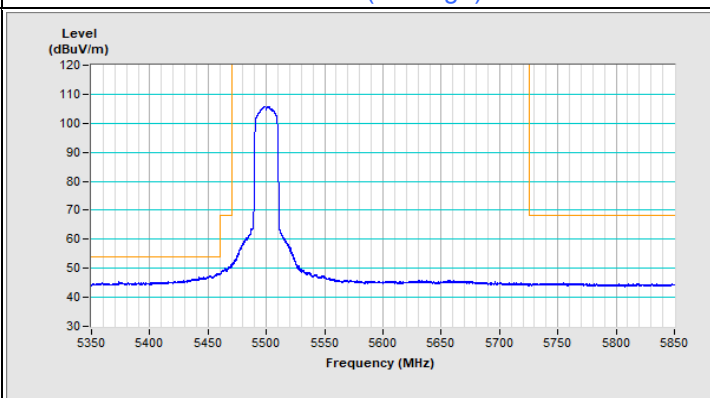


Vertical (Average)

### 802.11be (EHT20) Channel 140

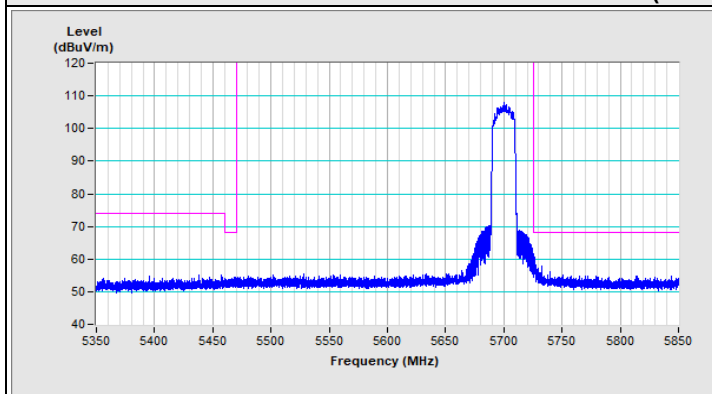


Horizontal (Peak)

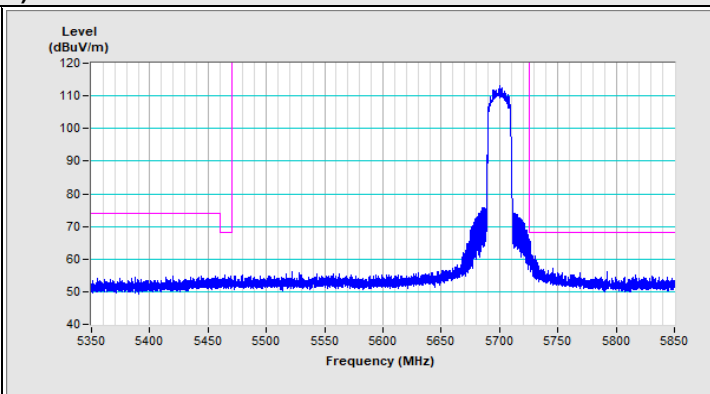

Vertical (Peak)


|                 |                     |                               |                                  |
|-----------------|---------------------|-------------------------------|----------------------------------|
| Frequency Range | 5.35 GHz ~ 5.95 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------|

### 802.11be (EHT20) Channel 144

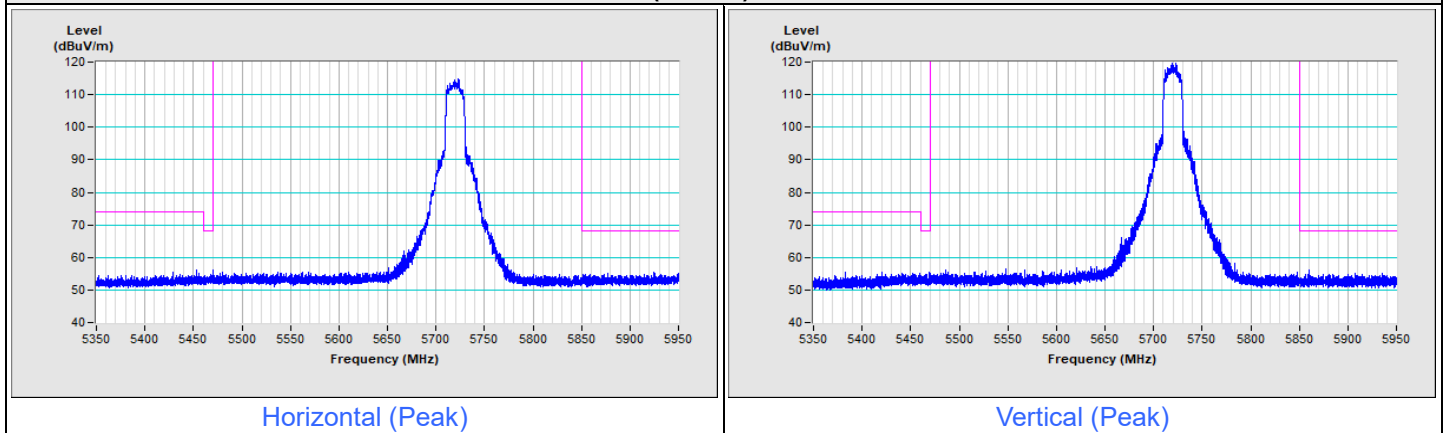



|                 |                 |                               |                                  |
|-----------------|-----------------|-------------------------------|----------------------------------|
| Frequency Range | 5.6 GHz ~ 6 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|-----------------|-------------------------------|----------------------------------|

### 802.11be (EHT20) Channel 149

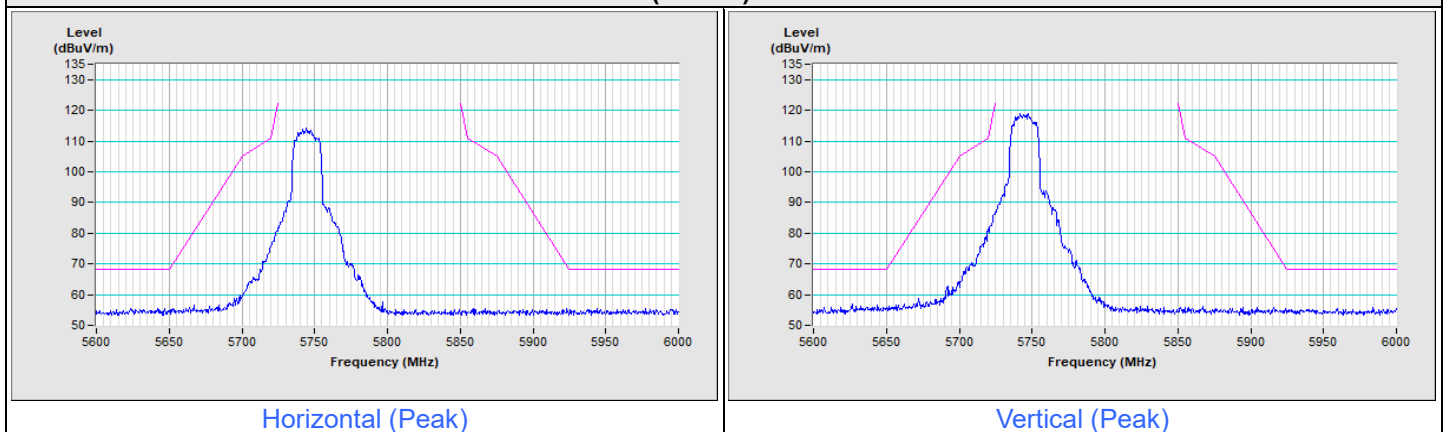


### 802.11be (EHT20) Channel 157

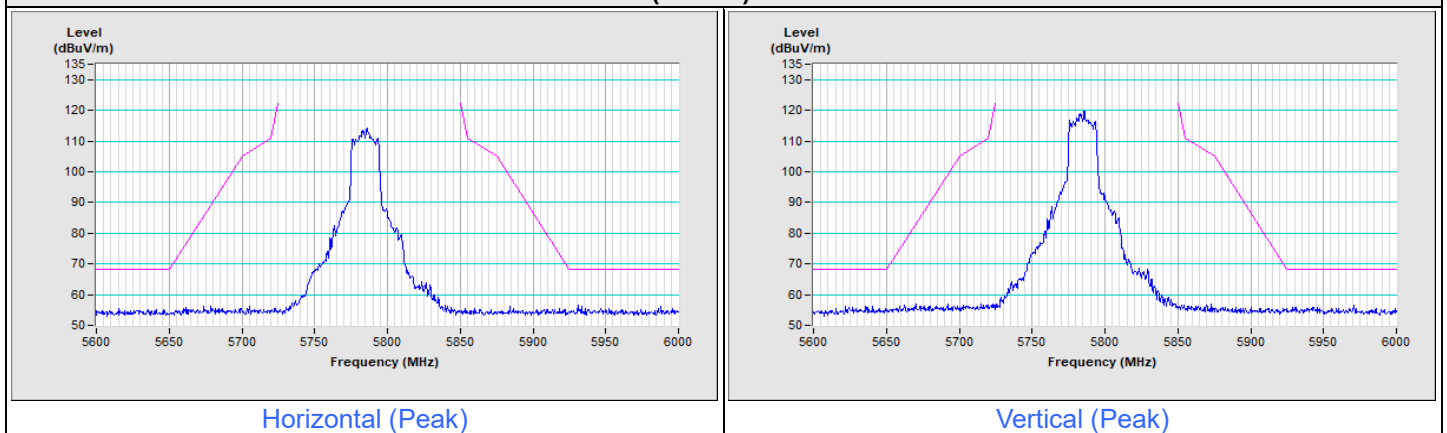

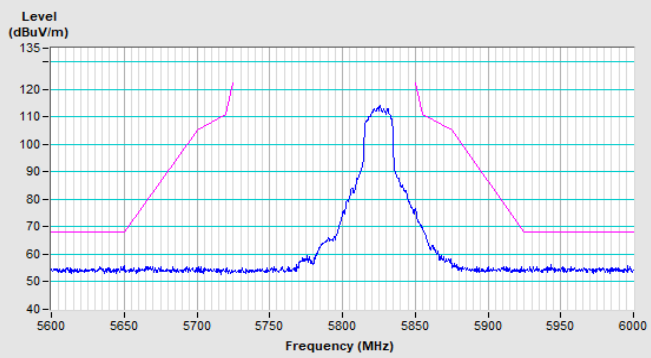**802.11be (EHT20) Channel 165**


Horizontal (Peak)

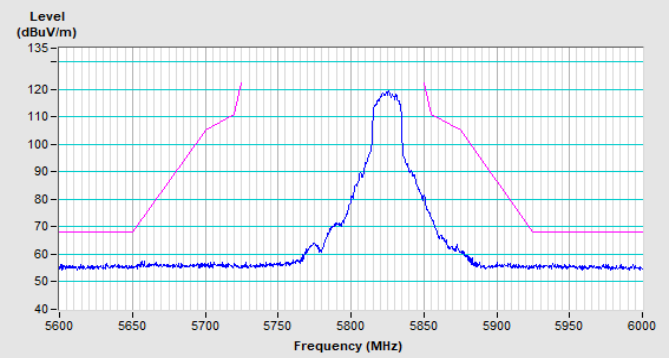


Vertical (Peak)

|                 |                    |                               |                                                                      |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 4.5 GHz ~ 5.46 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT40) Channel 38

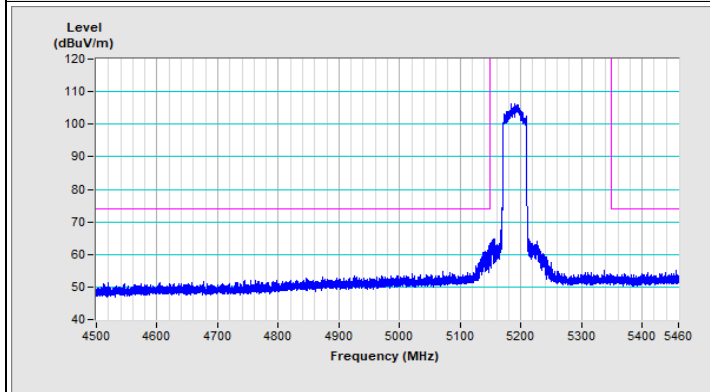


Horizontal (Peak)

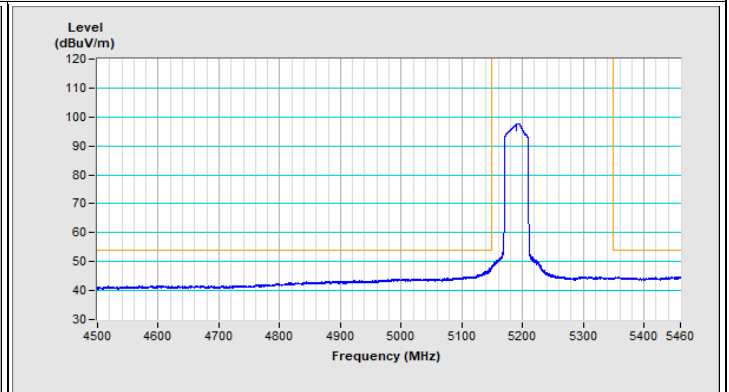

Horizontal (Average)

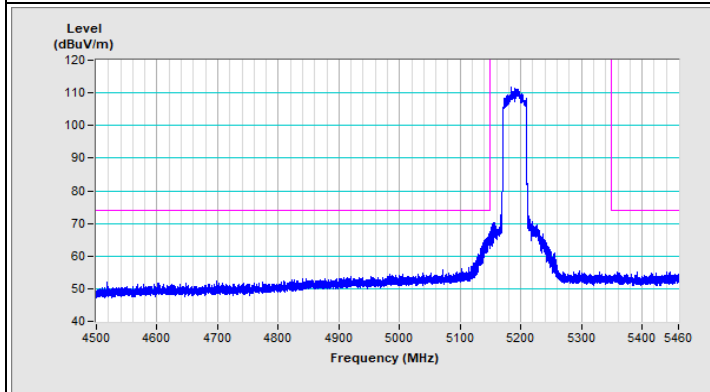


Vertical (Peak)

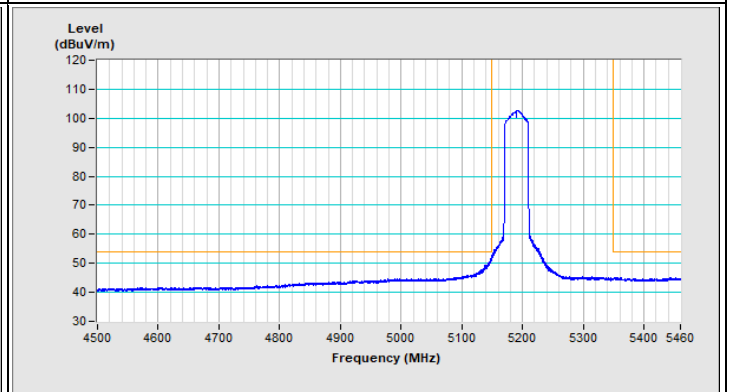


Vertical (Average)


### 802.11be (EHT40) Channel 46

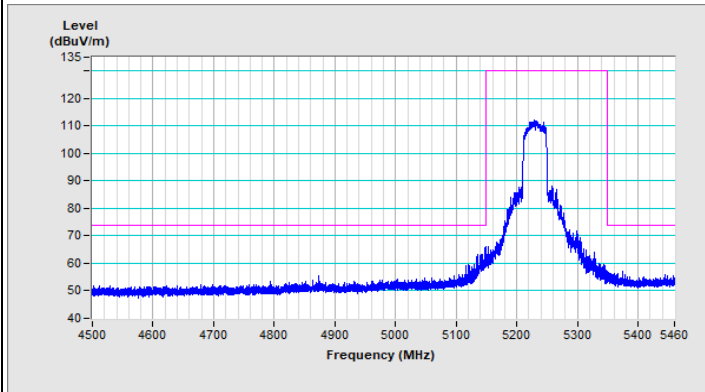


Horizontal (Peak)

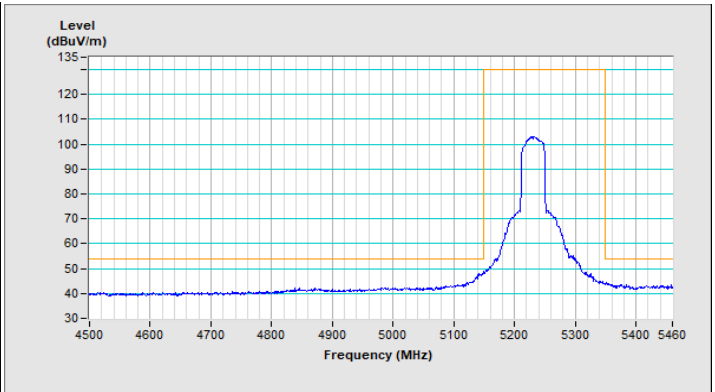

Horizontal (Average)

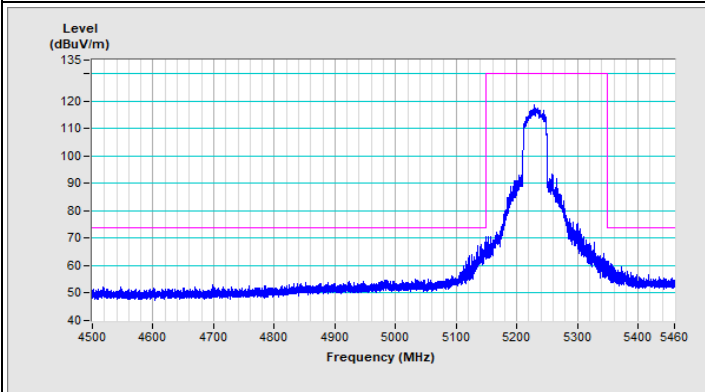


Vertical (Peak)

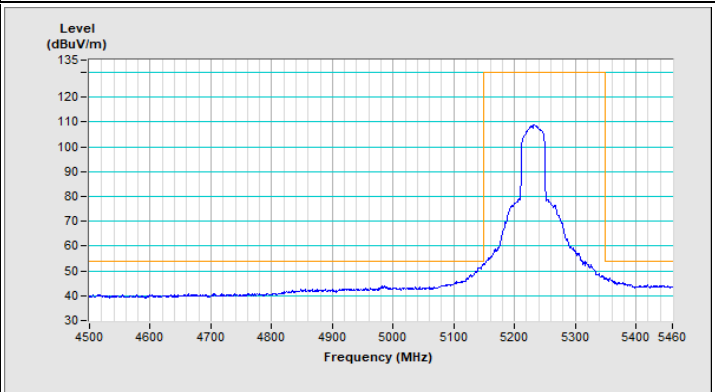


Vertical (Average)


### 802.11be (EHT40) Channel 54

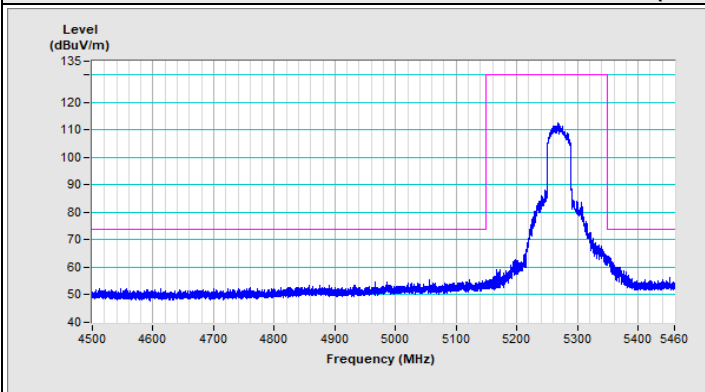


Horizontal (Peak)

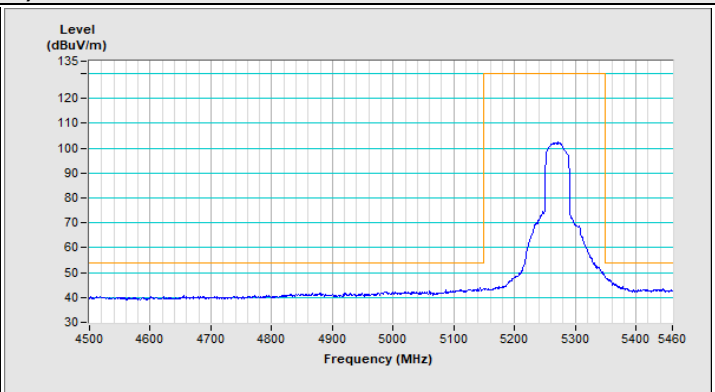

Horizontal (Average)

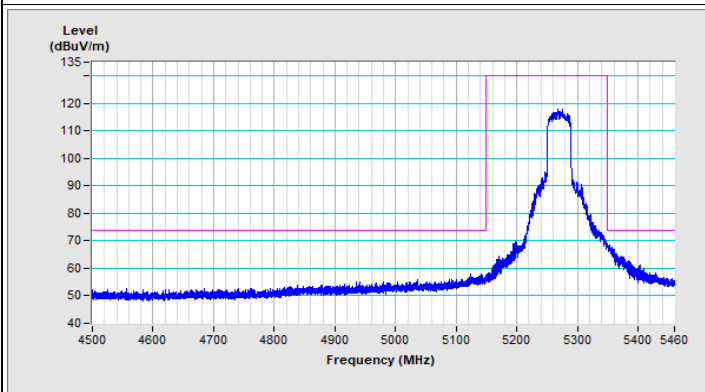


Vertical (Peak)

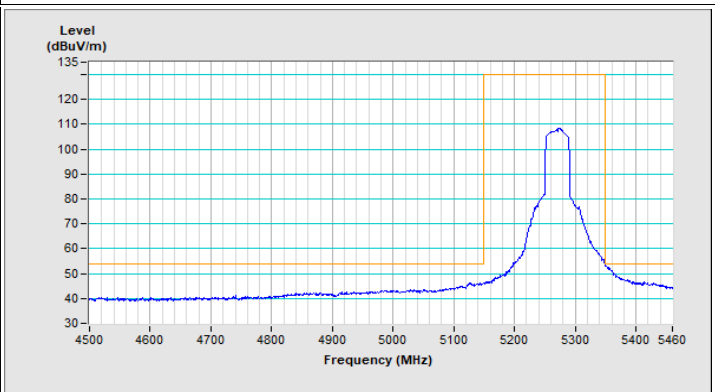


Vertical (Average)


## 802.11be (EHT40) Channel 62

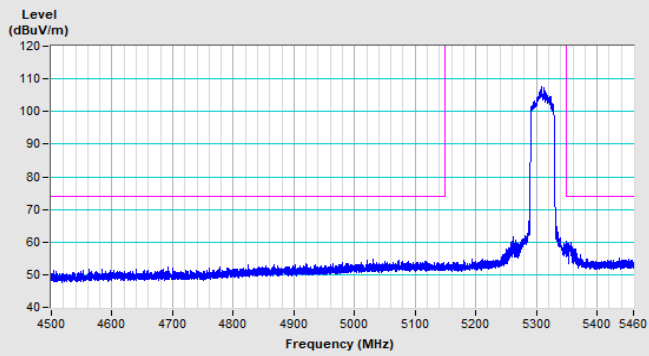


Horizontal (Peak)

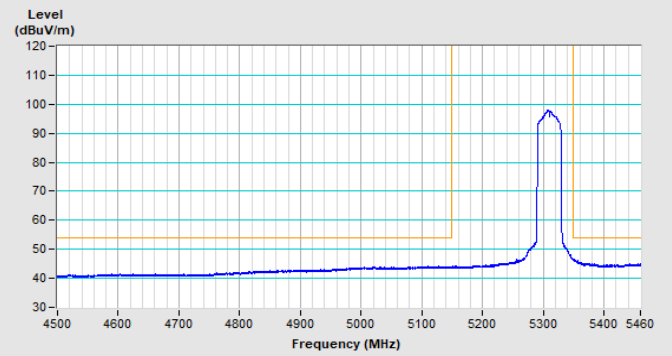

Horizontal (Average)

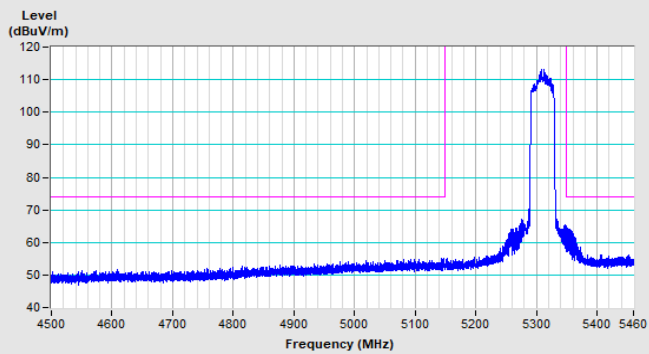


Vertical (Peak)

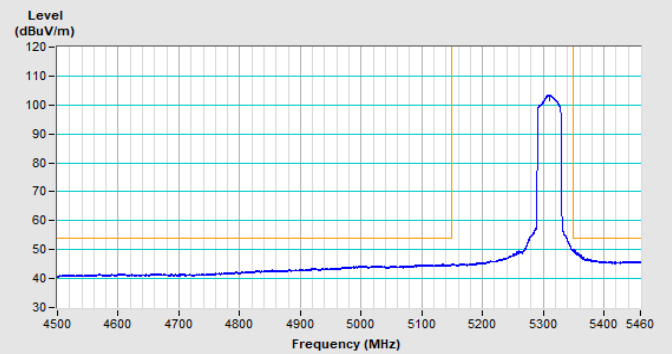


Vertical (Average)

|                 |                     |                               |                                                                      |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 5.35 GHz ~ 5.85 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT40) Channel 102

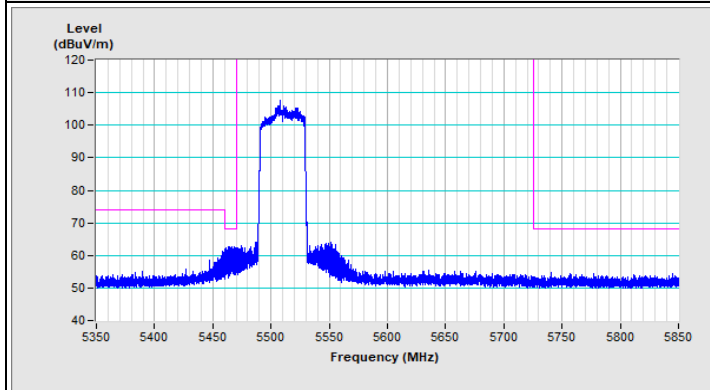


Horizontal (Peak)

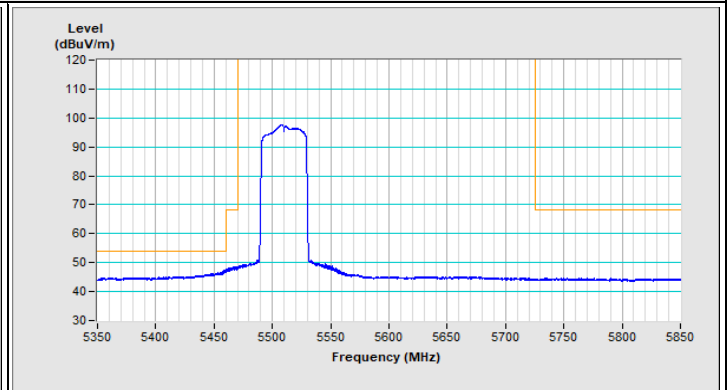

Horizontal (Average)

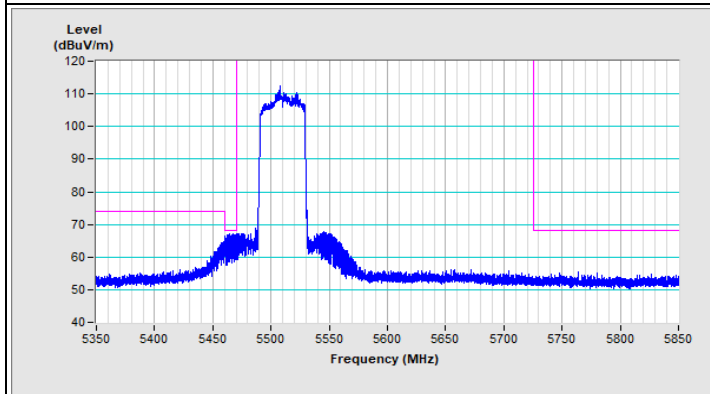


Vertical (Peak)

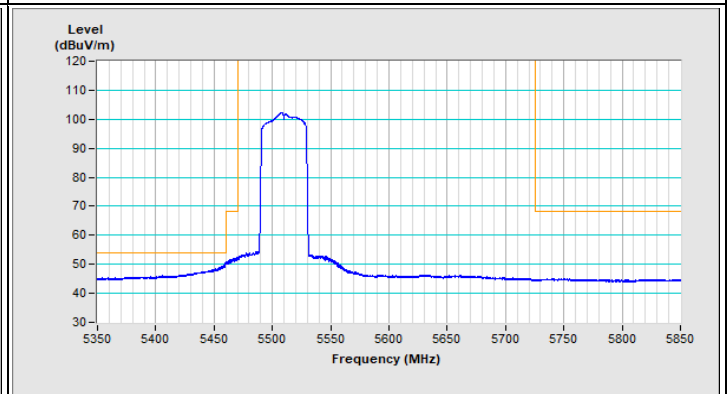


Vertical (Average)

### 802.11be (EHT40) Channel 134

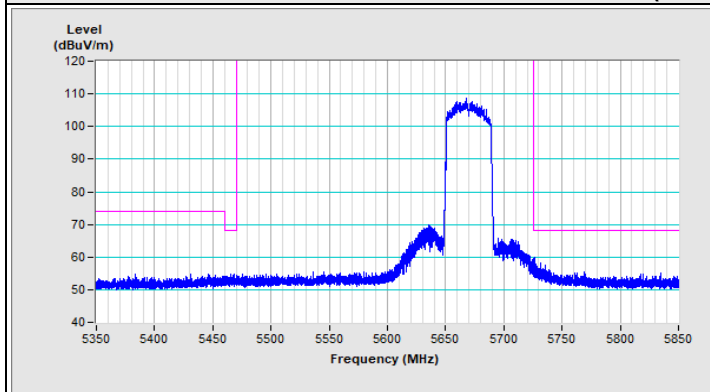


Horizontal (Peak)

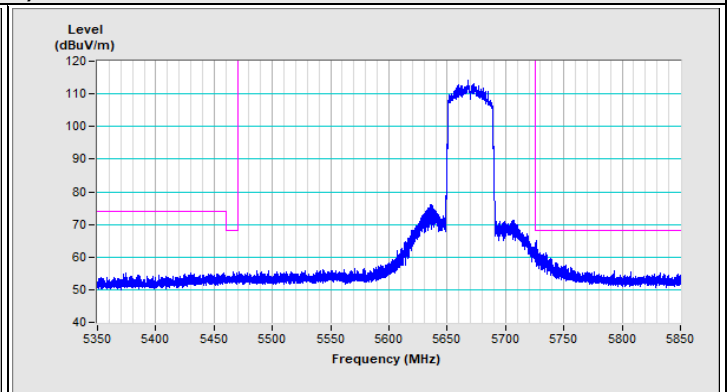

Vertical (Peak)


|                 |                     |                               |                                  |
|-----------------|---------------------|-------------------------------|----------------------------------|
| Frequency Range | 5.35 GHz ~ 5.95 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------|

### 802.11be (EHT40) Channel 142

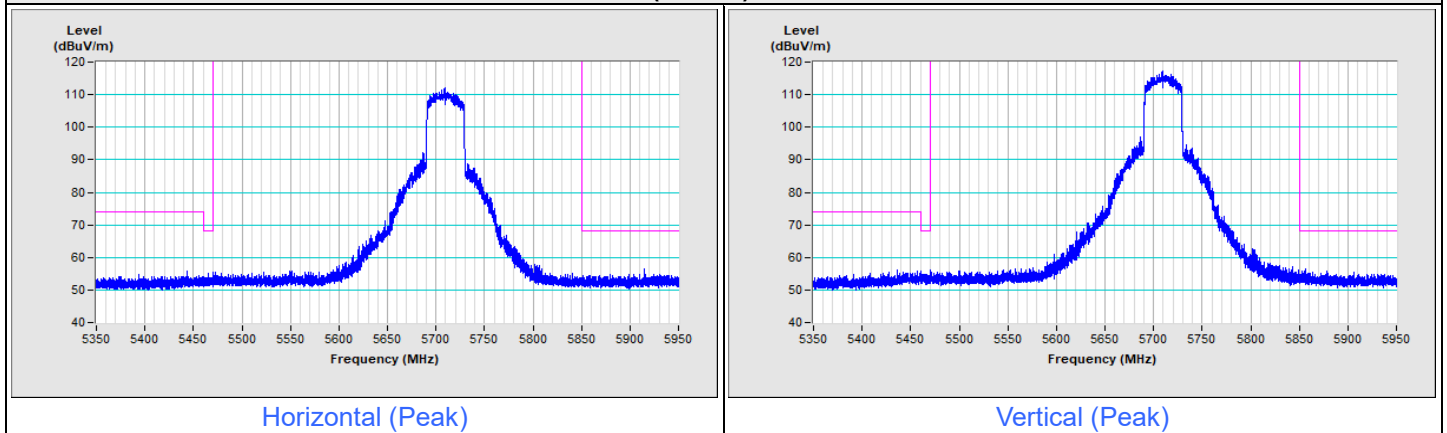


|                 |                 |                               |                                  |
|-----------------|-----------------|-------------------------------|----------------------------------|
| Frequency Range | 5.6 GHz ~ 6 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|-----------------|-------------------------------|----------------------------------|

### 802.11be (EHT40) Channel 151

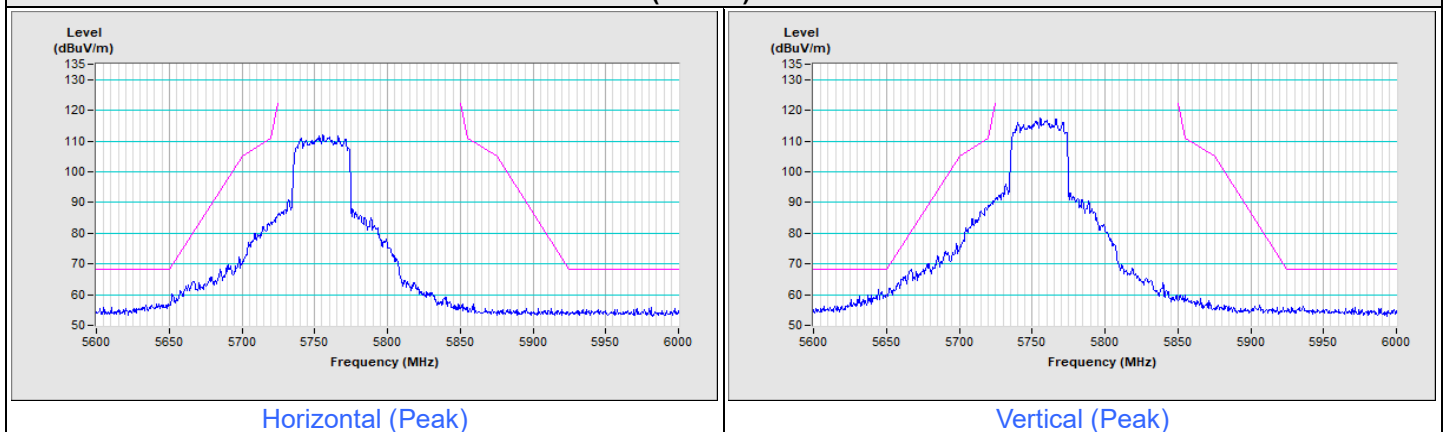


### 802.11be (EHT40) Channel 159

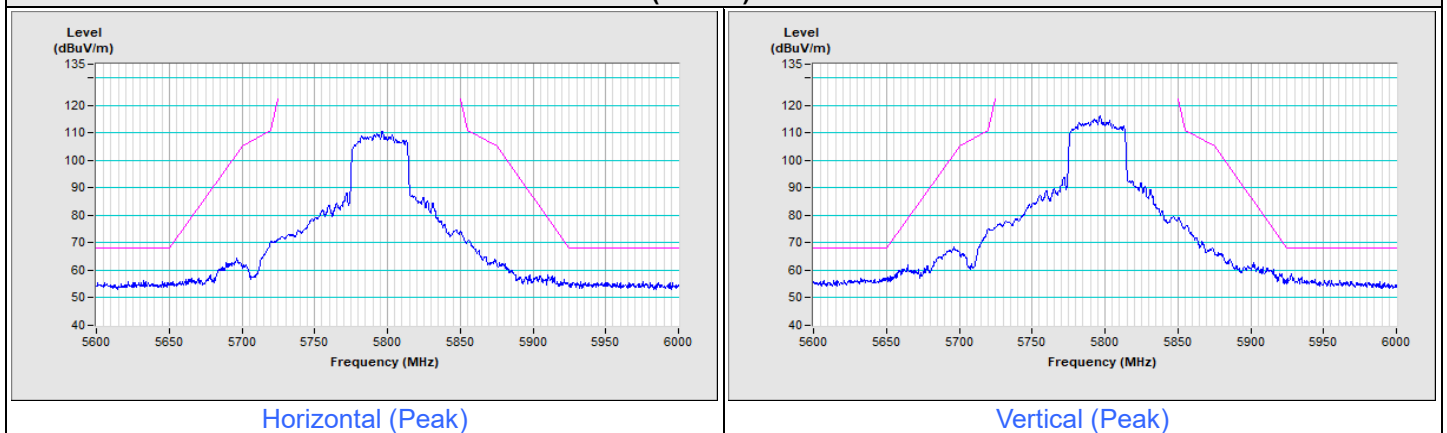


|                 |                    |                               |                                                                      |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 4.5 GHz ~ 5.46 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT80) Channel 42

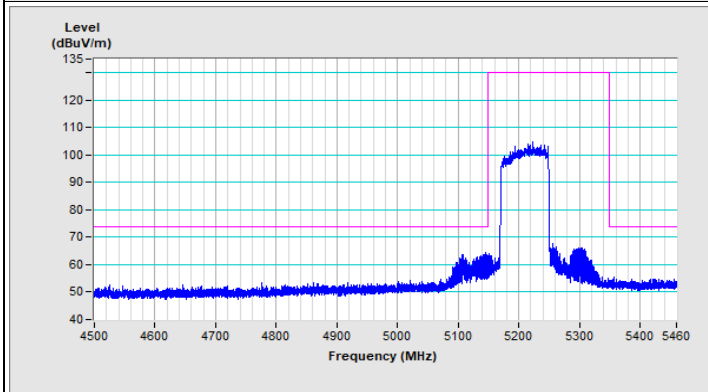


Horizontal (Peak)

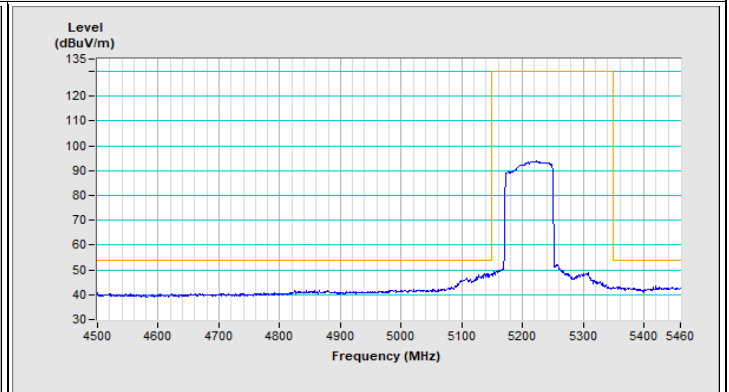

Horizontal (Average)

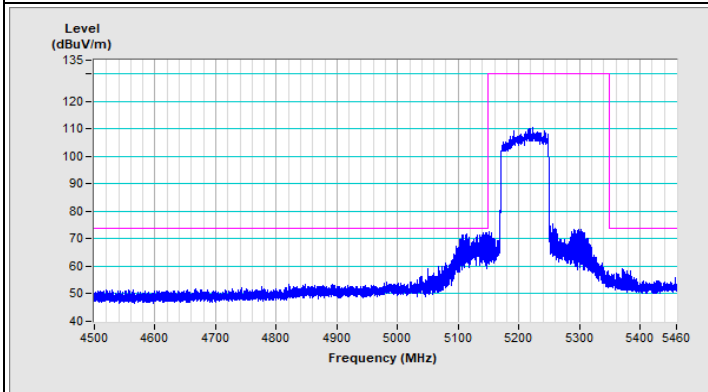


Vertical (Peak)

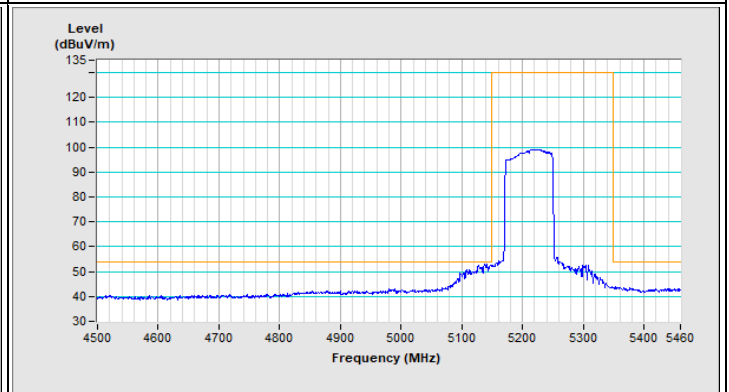


Vertical (Average)


## 802.11be (EHT80) Channel 58

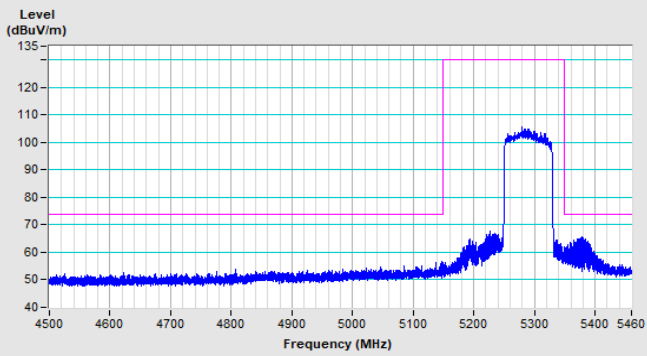


Horizontal (Peak)

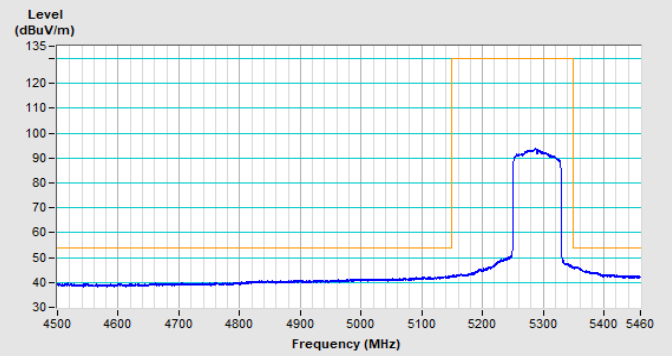

Horizontal (Average)

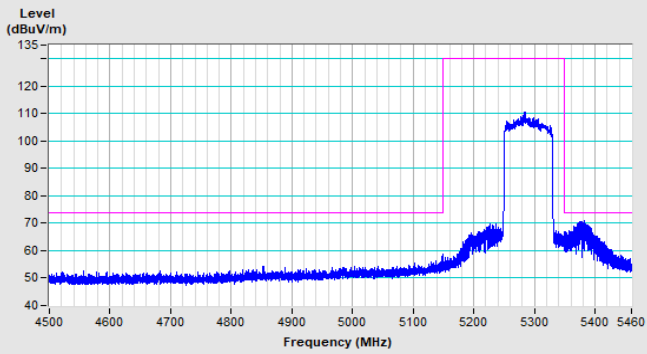


Vertical (Peak)

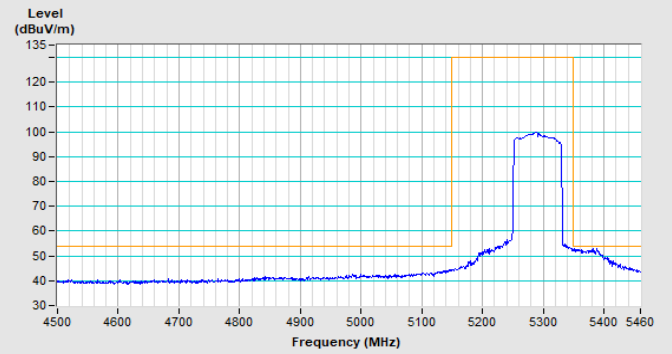


Vertical (Average)

|                 |                     |                               |                                                                      |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 5.35 GHz ~ 5.85 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT80) Channel 106

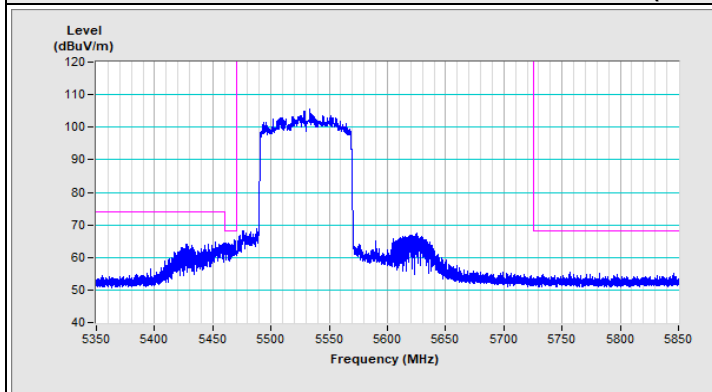


Horizontal (Peak)

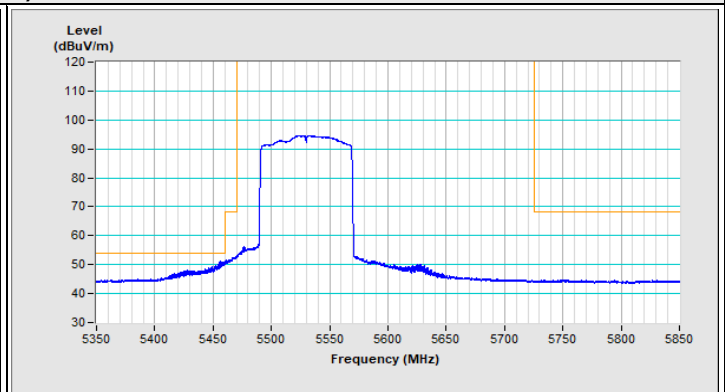

Horizontal (Average)

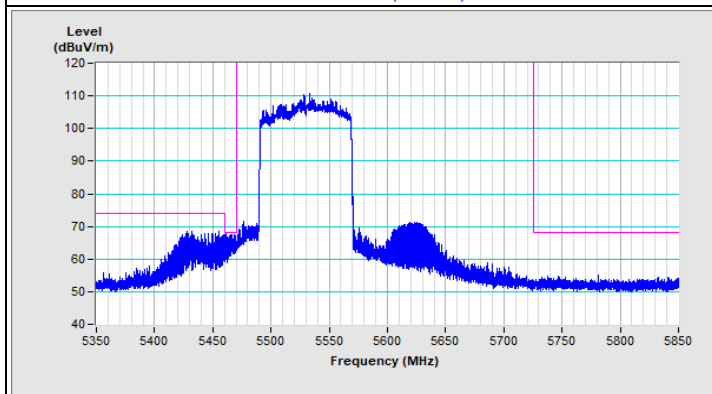


Vertical (Peak)

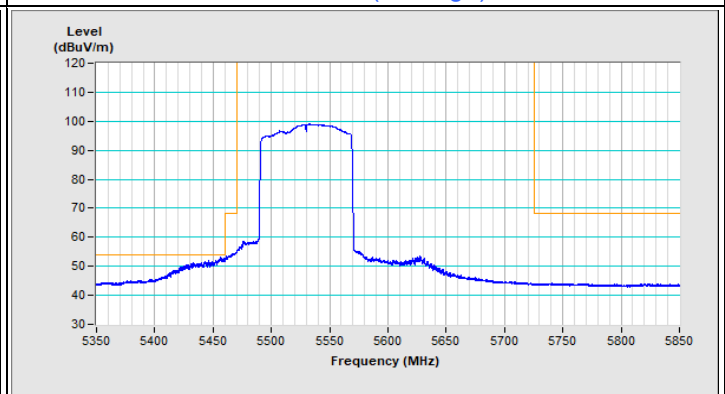


Vertical (Average)

### 802.11be (EHT80) Channel 122

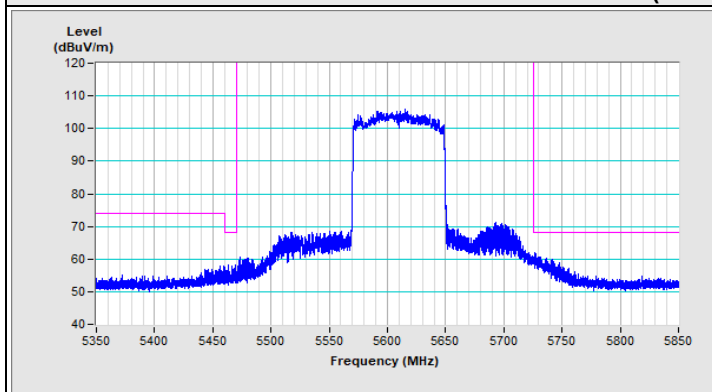


Horizontal (Peak)

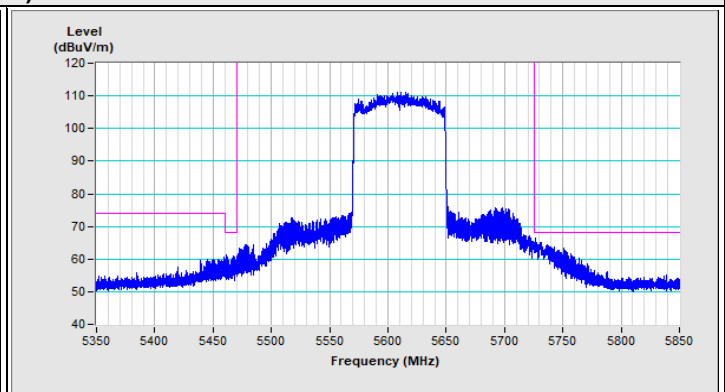

Vertical (Peak)


|                 |                     |                               |                                  |
|-----------------|---------------------|-------------------------------|----------------------------------|
| Frequency Range | 5.35 GHz ~ 5.95 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------|

### 802.11be (EHT80) Channel 138

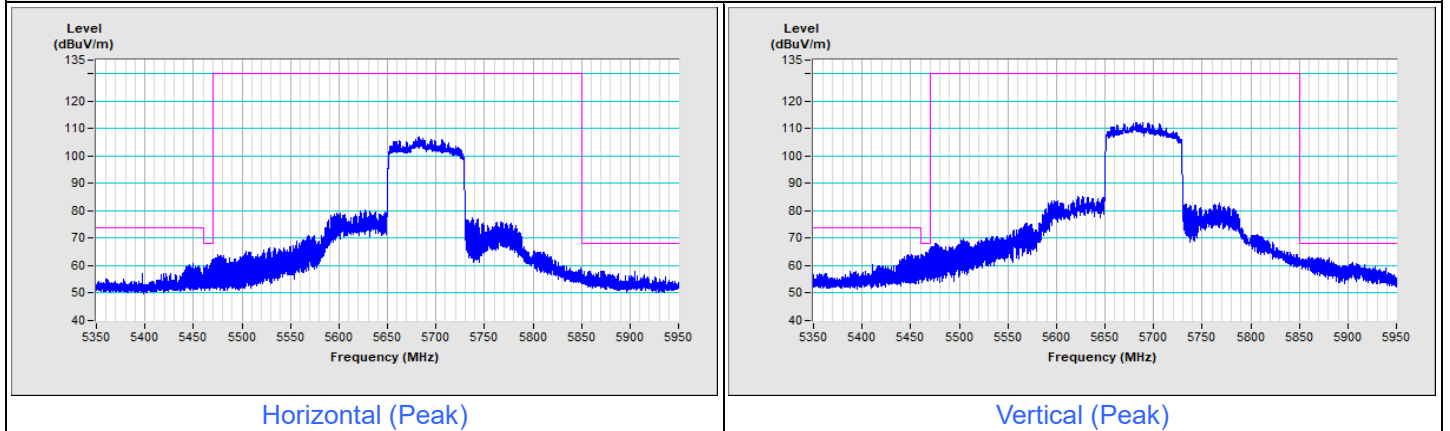


|                 |                 |                               |                                  |
|-----------------|-----------------|-------------------------------|----------------------------------|
| Frequency Range | 5.6 GHz ~ 6 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|-----------------|-------------------------------|----------------------------------|

### 802.11be (EHT80) Channel 155

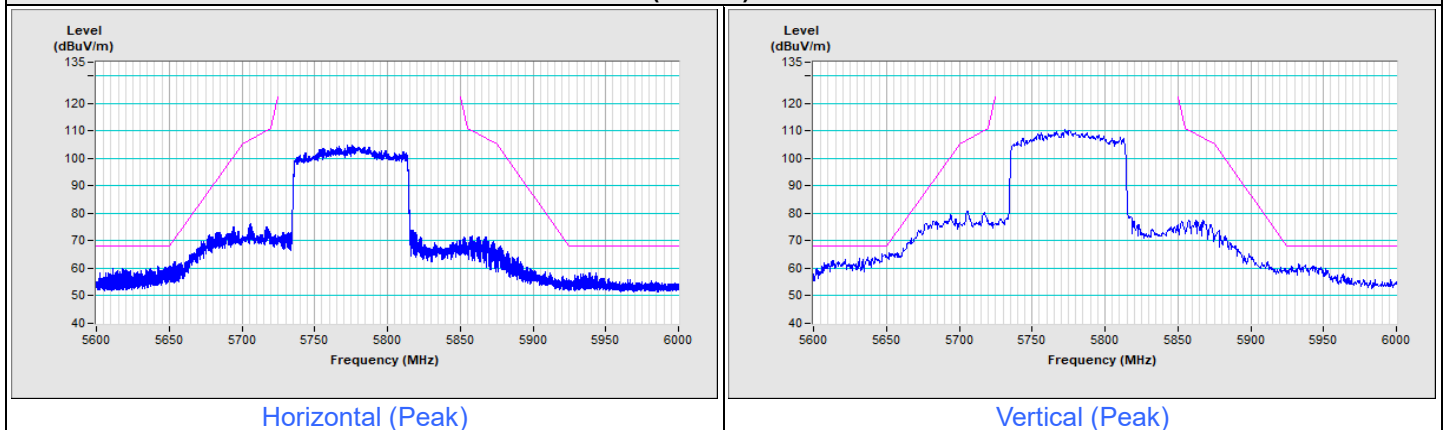


|                 |                    |                               |                                                                      |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 4.5 GHz ~ 5.46 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT160) Channel 50

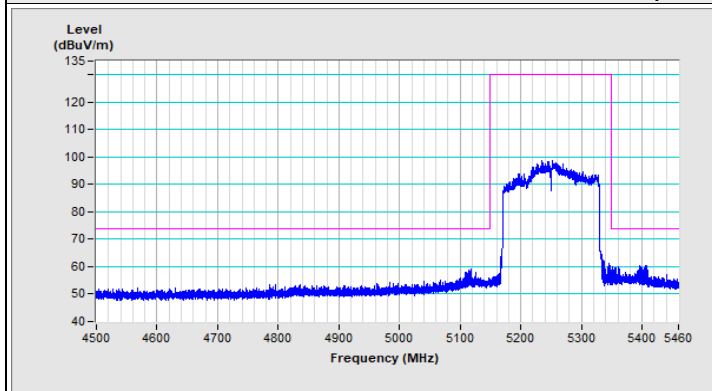


Horizontal (Peak)

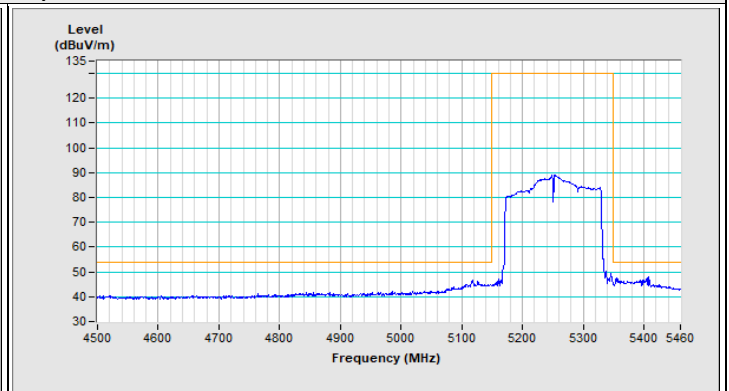

Horizontal (Average)

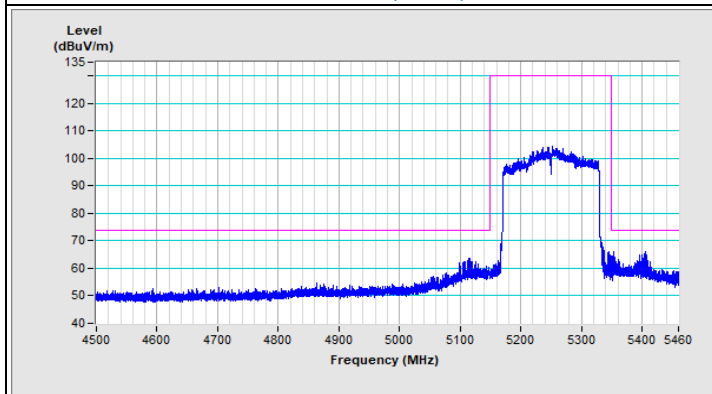


Vertical (Peak)

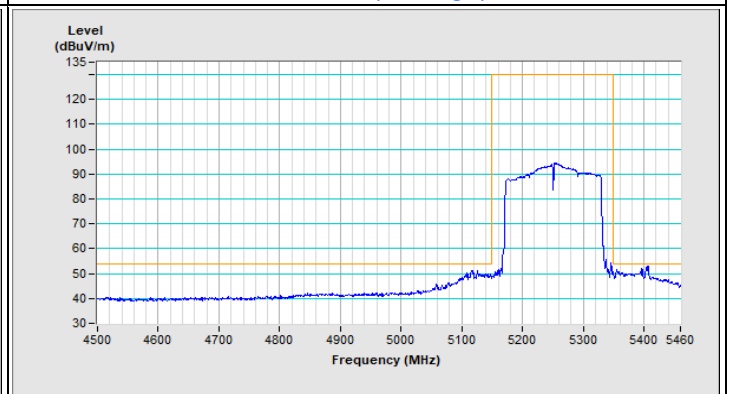


Vertical (Average)

|                 |                     |                               |                                                                      |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 5.35 GHz ~ 5.85 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT160) Channel 114

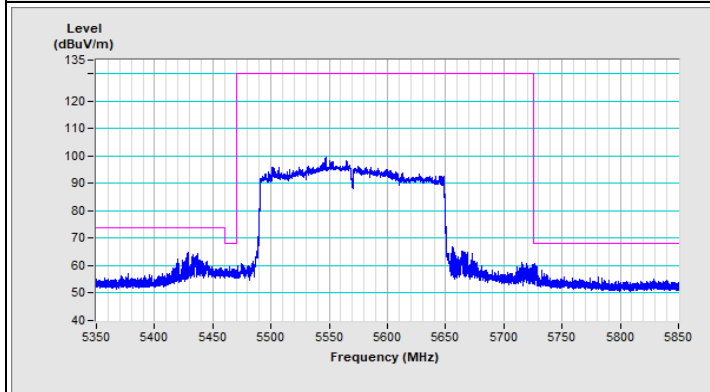


Horizontal (Peak)

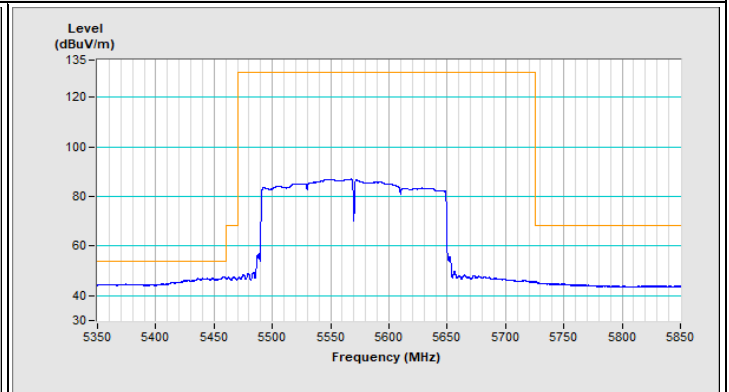

Horizontal (Average)

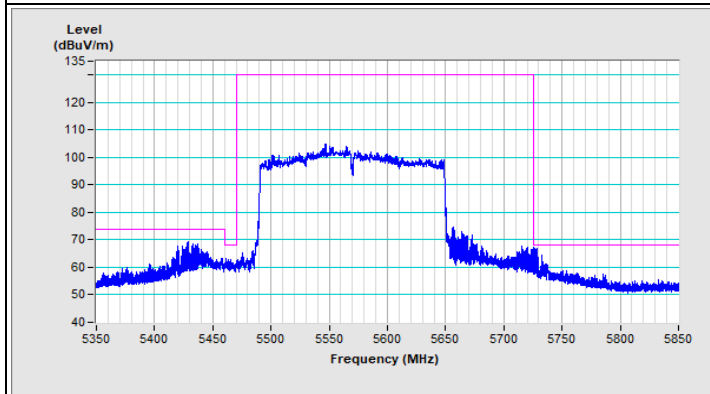


Vertical (Peak)

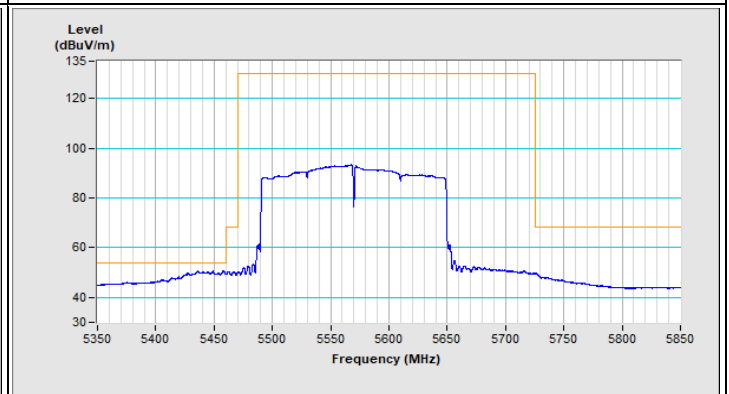


Vertical (Average)

|                 |                    |                               |                                                                      |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 4.5 GHz ~ 5.46 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT20) 26-tone RU Channel 36

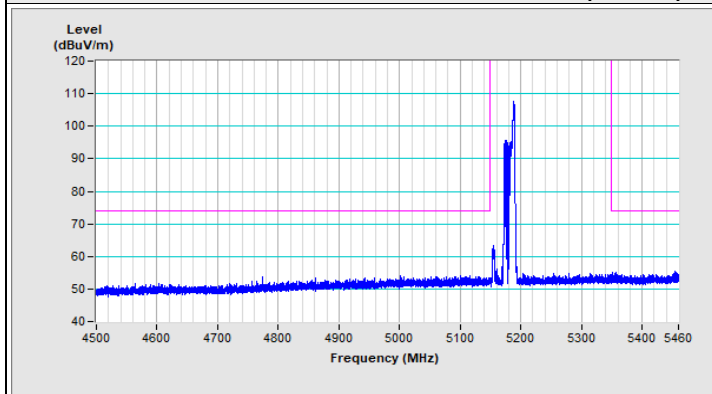


Horizontal (Peak)

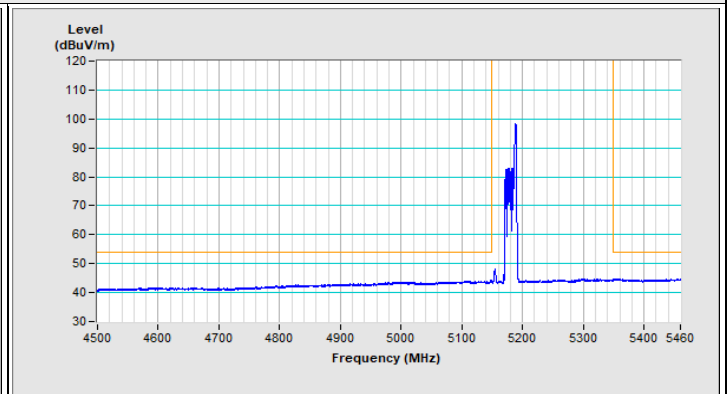

Horizontal (Average)

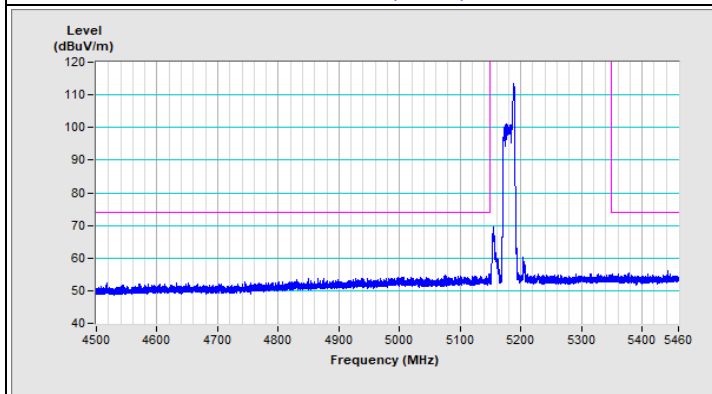


Vertical (Peak)

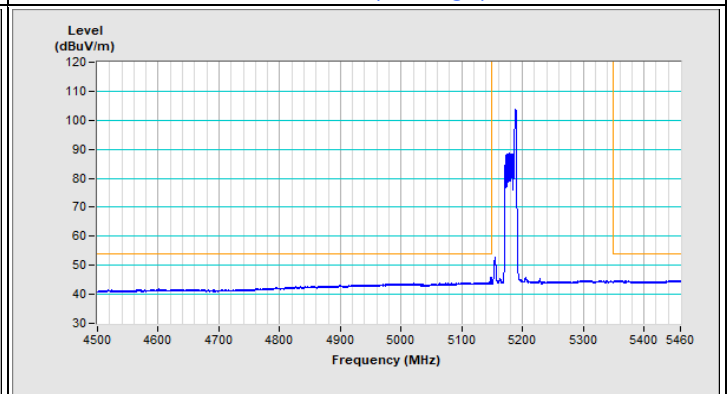


Vertical (Average)


### 802.11be (EHT20) 26-tone RU Channel 48

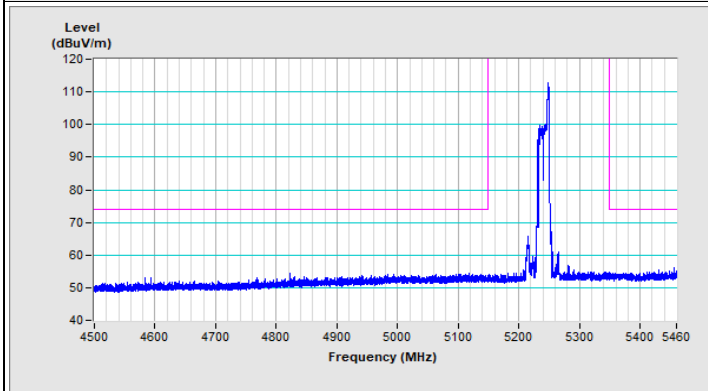


Horizontal (Peak)

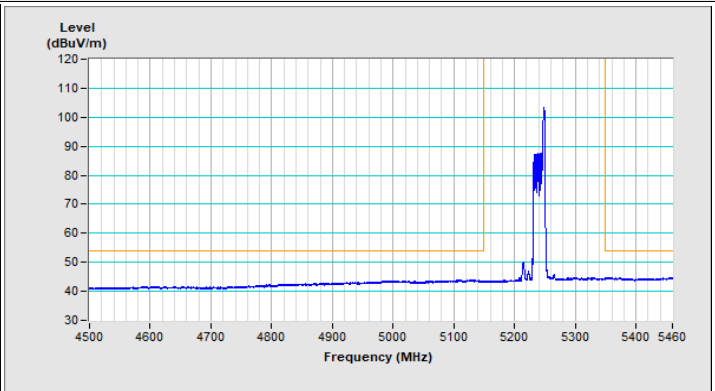

Horizontal (Average)

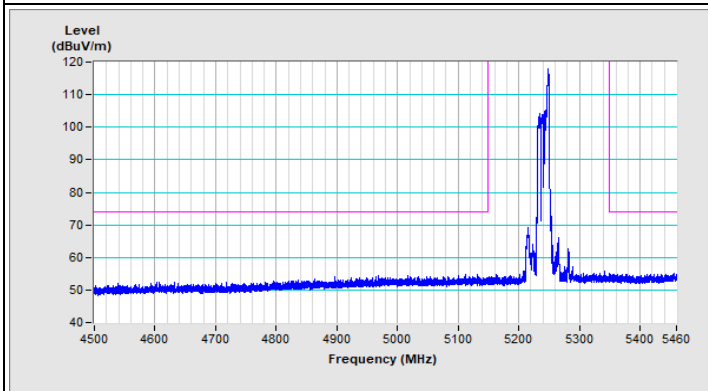


Vertical (Peak)

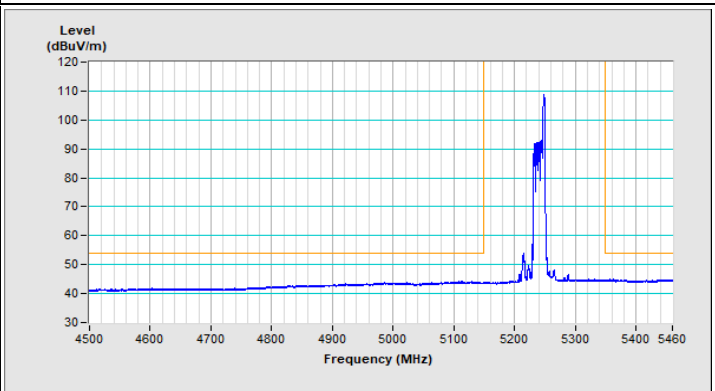


Vertical (Average)


### 802.11be (EHT20) 26-tone RU Channel 52

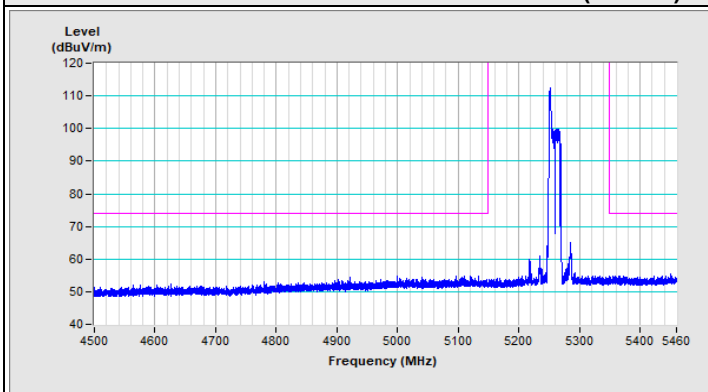


Horizontal (Peak)

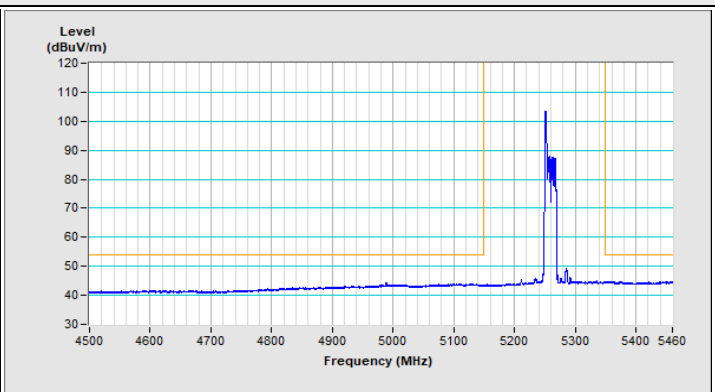

Horizontal (Average)

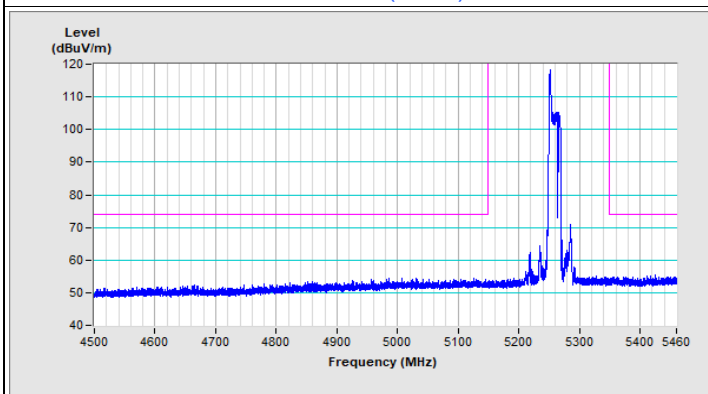


Vertical (Peak)

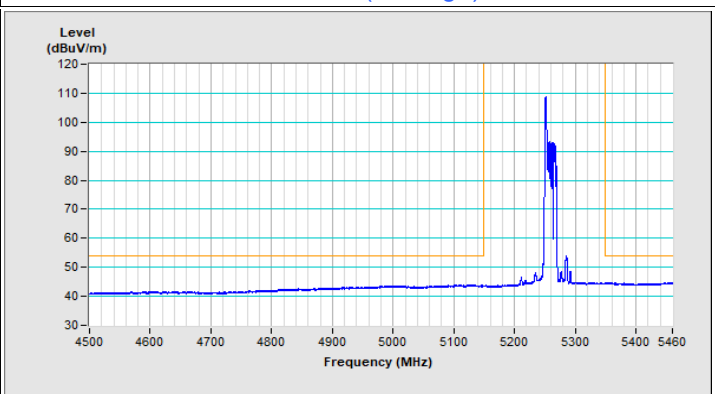


Vertical (Average)


# 802.11be (EHT20) 26-tone RU Channel 64

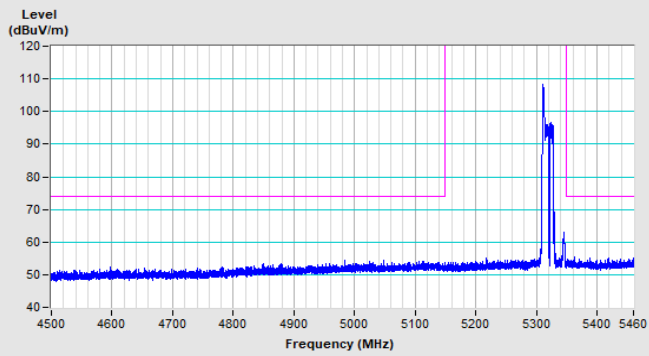


Horizontal (Peak)

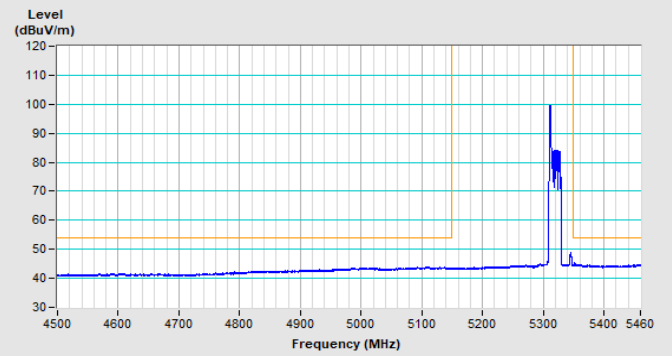

Horizontal (Average)

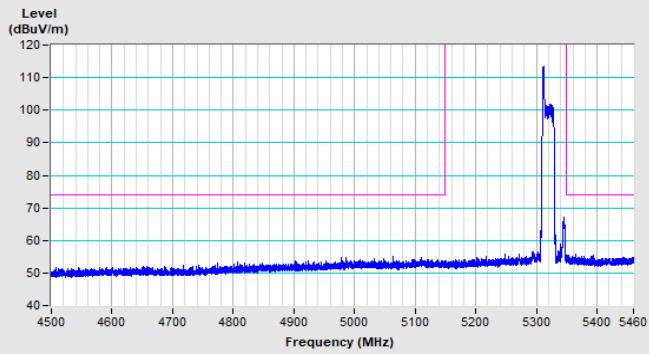


Vertical (Peak)

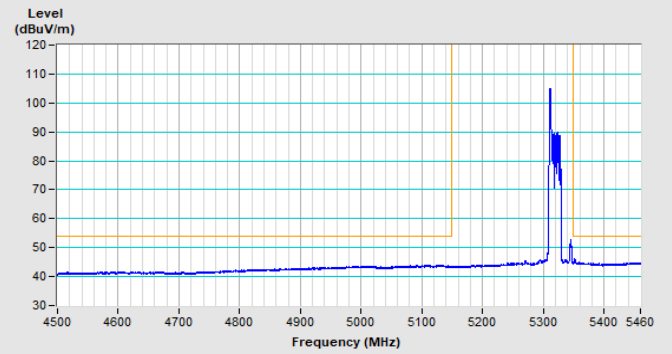


Vertical (Average)

|                 |                     |                               |                                                                      |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 5.35 GHz ~ 5.85 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT20) 26-tone RU Channel 100

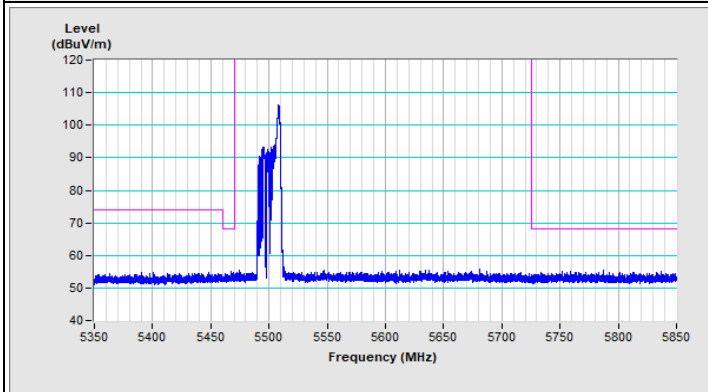


Horizontal (Peak)

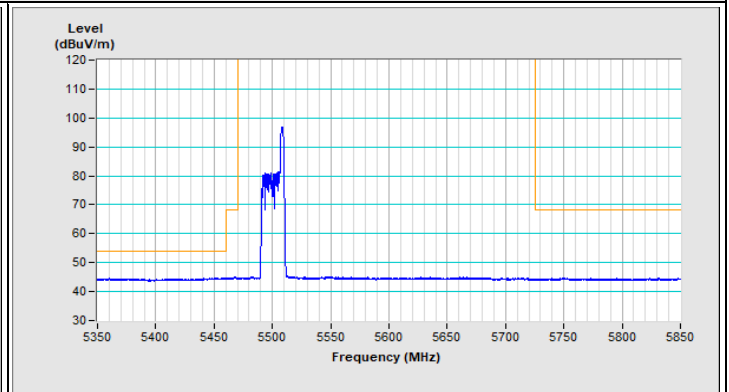

Horizontal (Average)

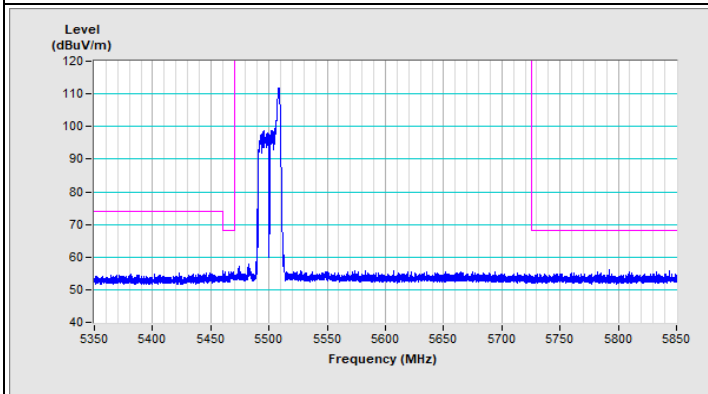


Vertical (Peak)

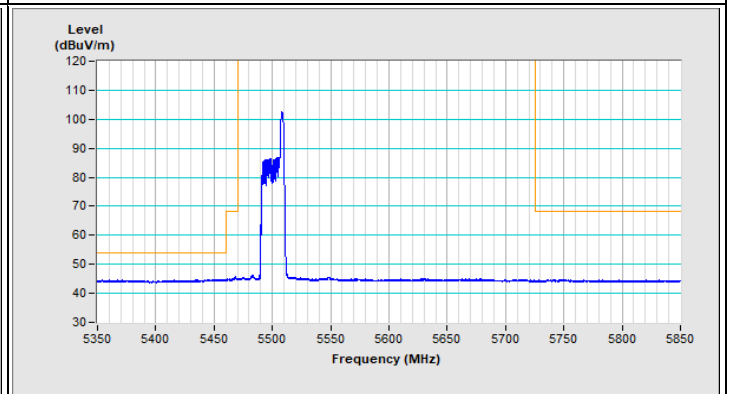


Vertical (Average)

### 802.11be (EHT20) 26-tone RU Channel 140

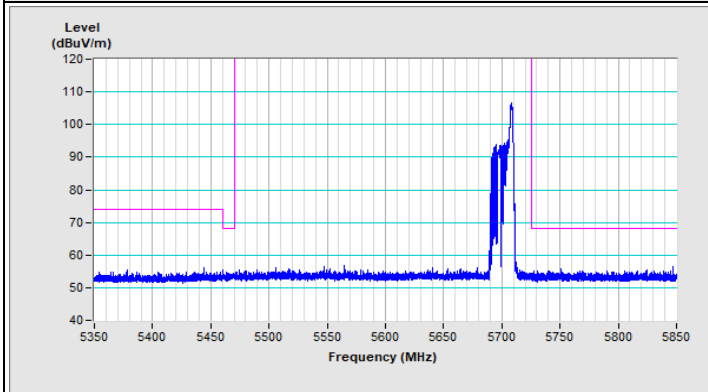


Horizontal (Peak)

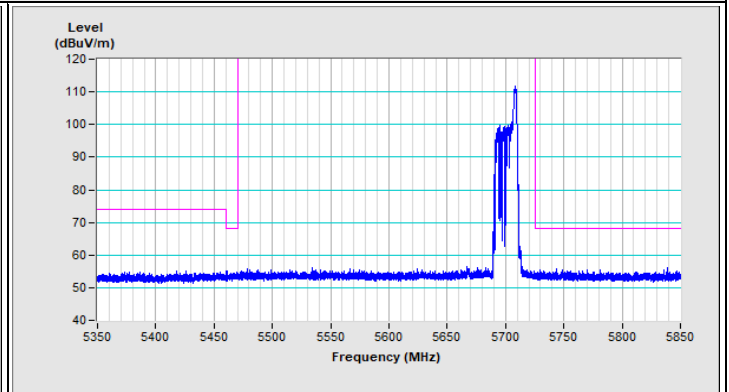

Vertical (Peak)


|                 |                     |                               |                                  |
|-----------------|---------------------|-------------------------------|----------------------------------|
| Frequency Range | 5.35 GHz ~ 5.95 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------|

### 802.11be (EHT20) 26-tone RU Channel 144

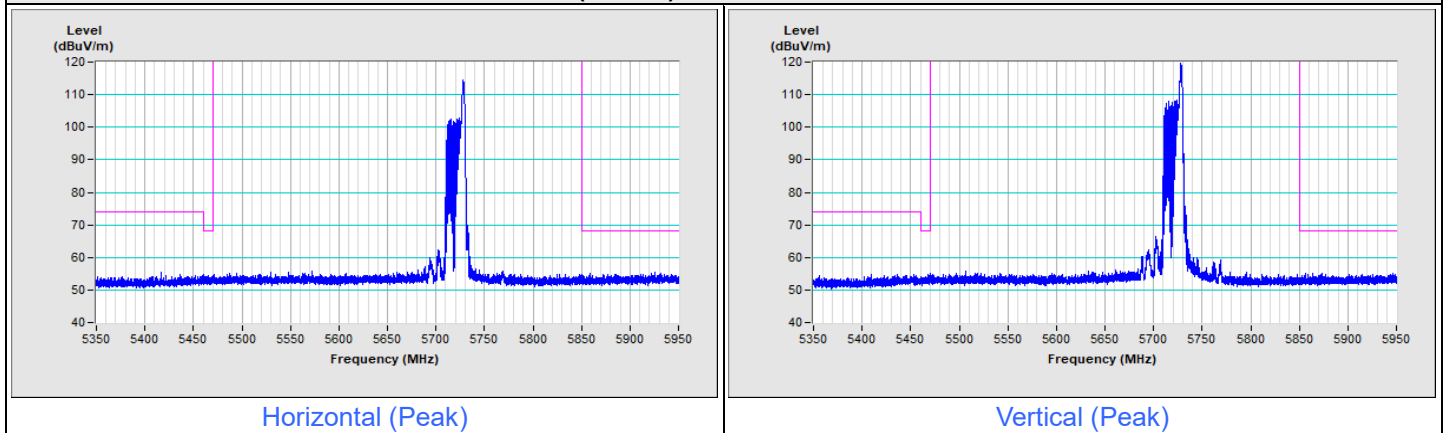




|                 |                 |                               |                                  |
|-----------------|-----------------|-------------------------------|----------------------------------|
| Frequency Range | 5.6 GHz ~ 6 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|-----------------|-------------------------------|----------------------------------|

### 802.11be (EHT20) 26-tone RU Channel 149

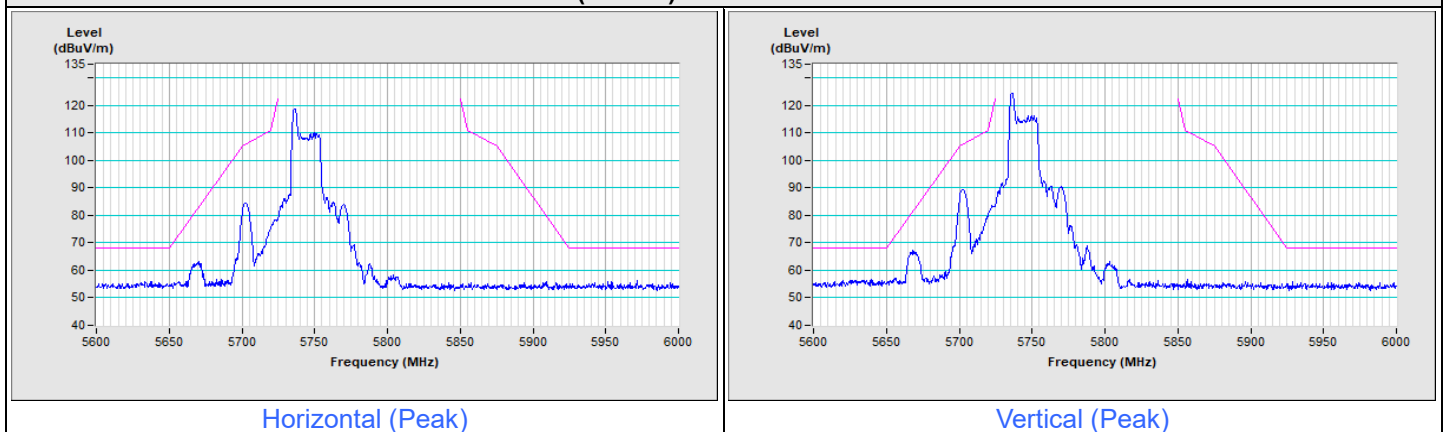


### 802.11be (EHT20) 26-tone RU Channel 157

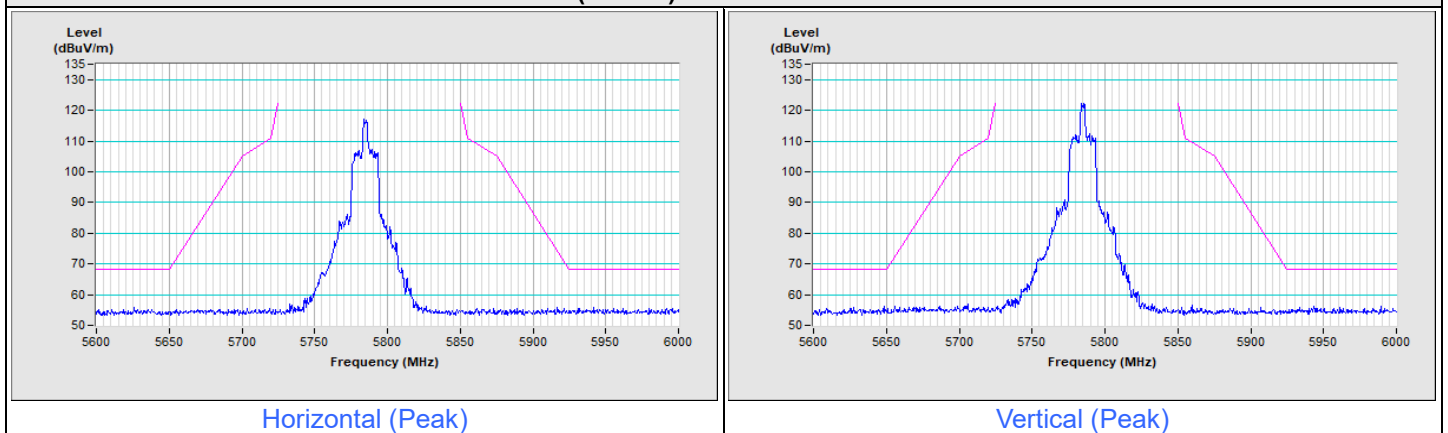

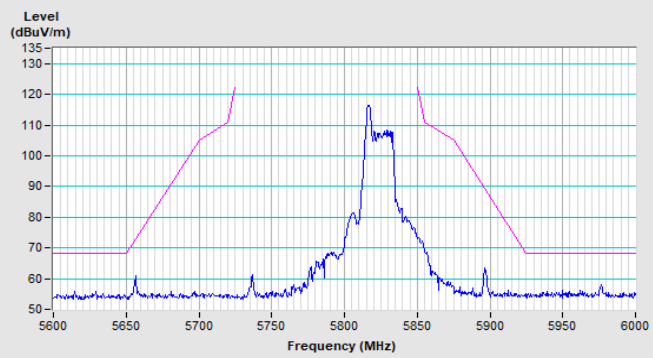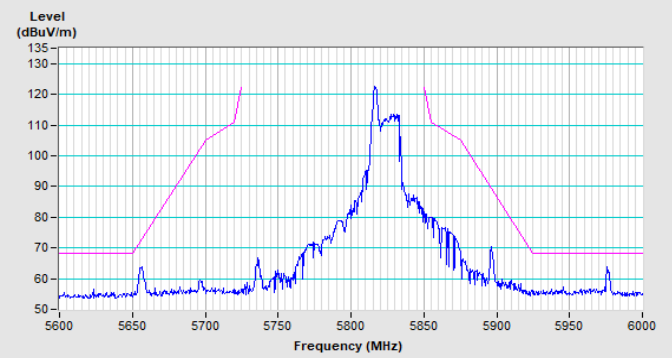
**802.11be (EHT20) 26-tone RU Channel 165****Horizontal (Peak)****Vertical (Peak)**

|                 |                    |                               |                                                                      |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 4.5 GHz ~ 5.46 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT20) 52-tone RU Channel 36

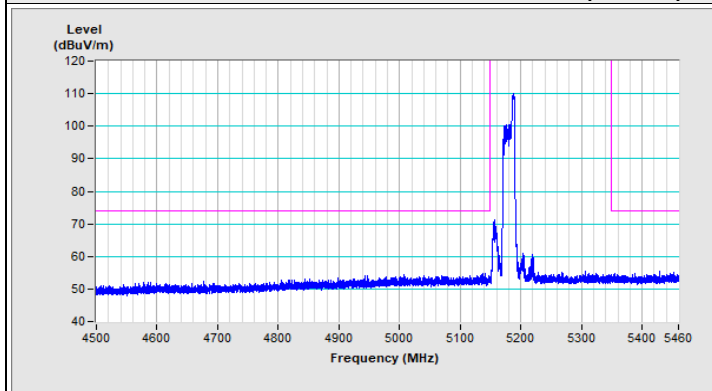


Horizontal (Peak)

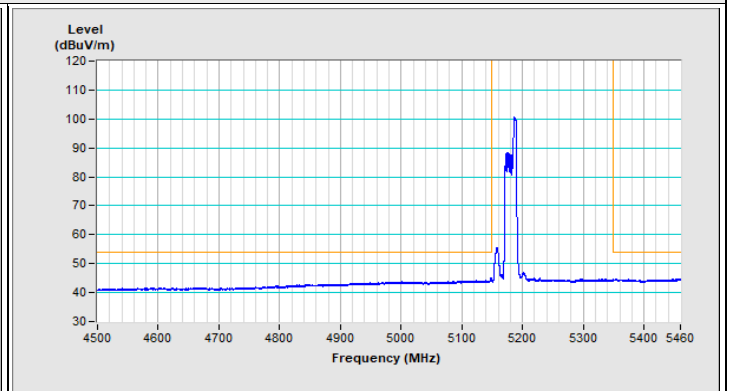

Horizontal (Average)

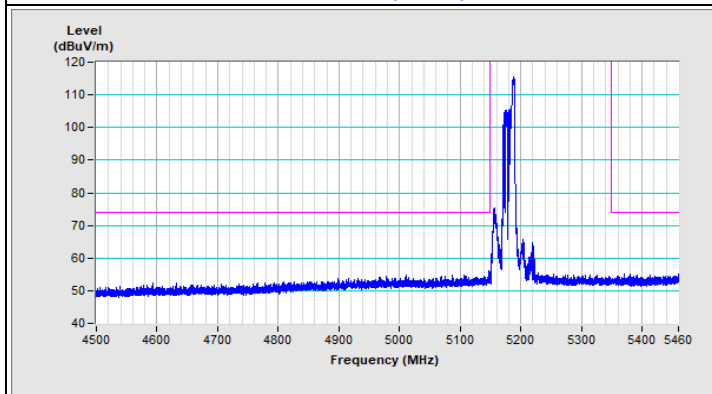


Vertical (Peak)

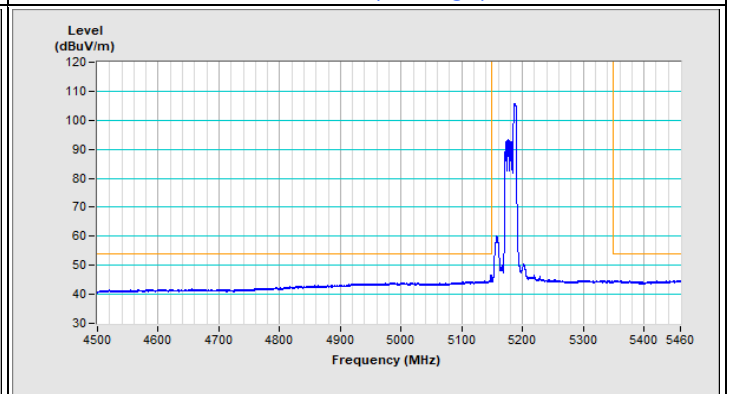


Vertical (Average)


### 802.11be (EHT20) 52-tone RU Channel 48

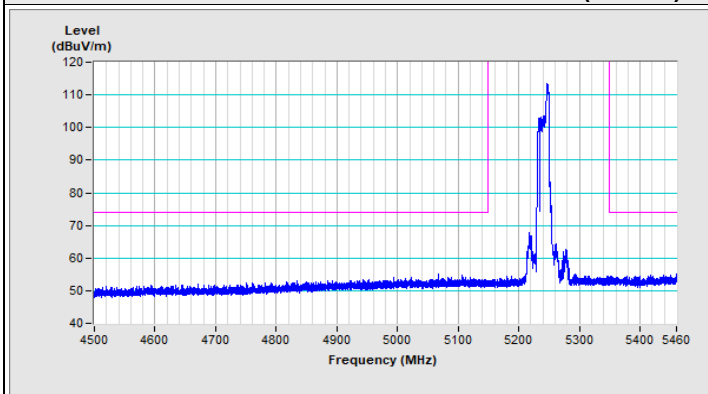


Horizontal (Peak)

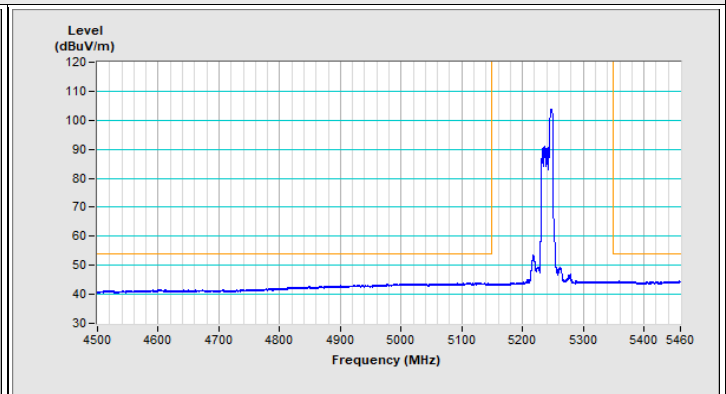

Horizontal (Average)

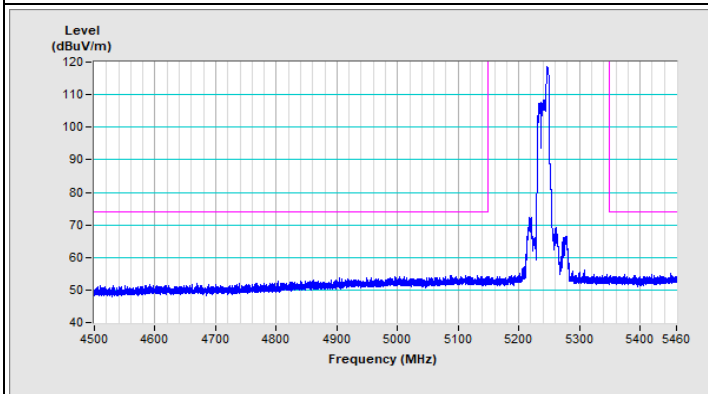


Vertical (Peak)

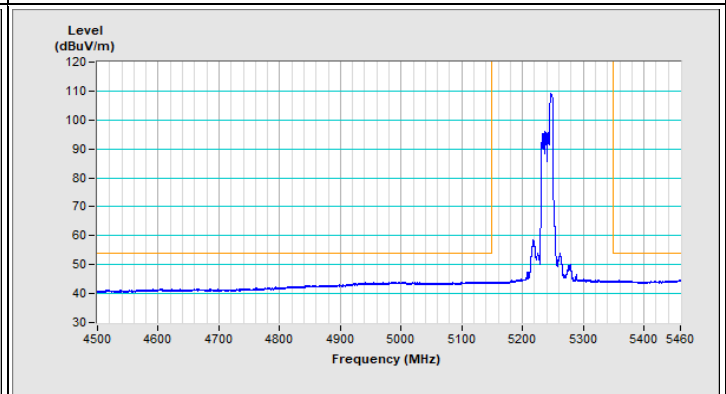


Vertical (Average)


### 802.11be (EHT20) 52-tone RU Channel 52

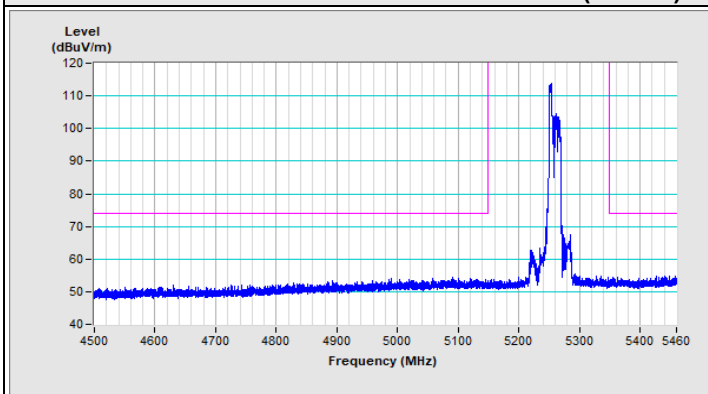


Horizontal (Peak)

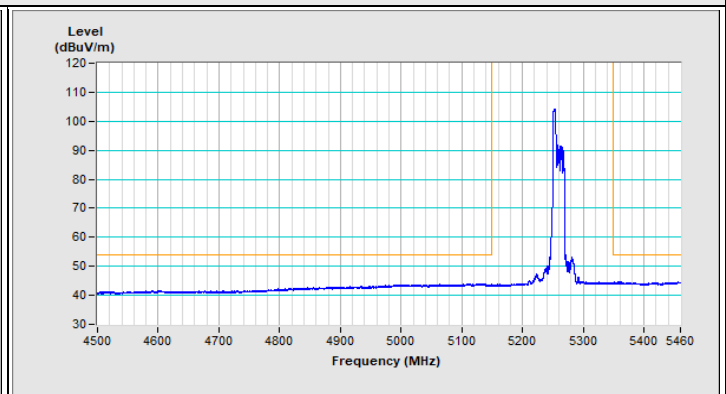

Horizontal (Average)

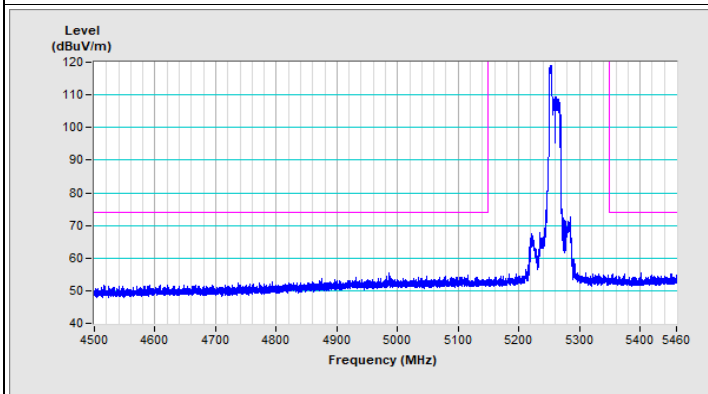


Vertical (Peak)

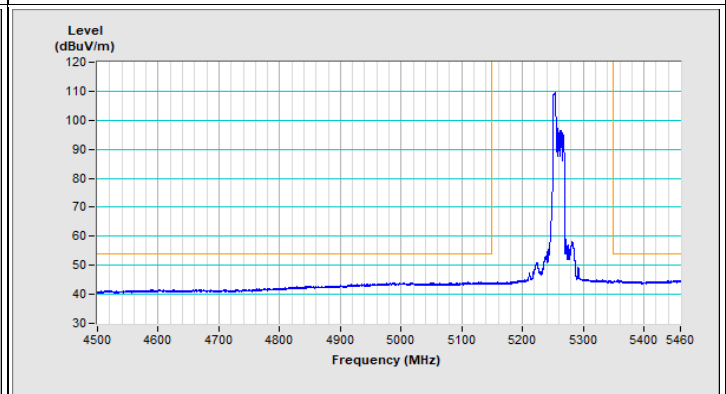


Vertical (Average)


### 802.11be (EHT20) 52-tone RU Channel 64

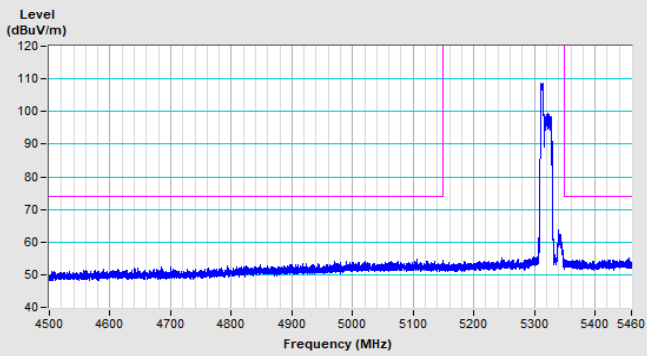


Horizontal (Peak)

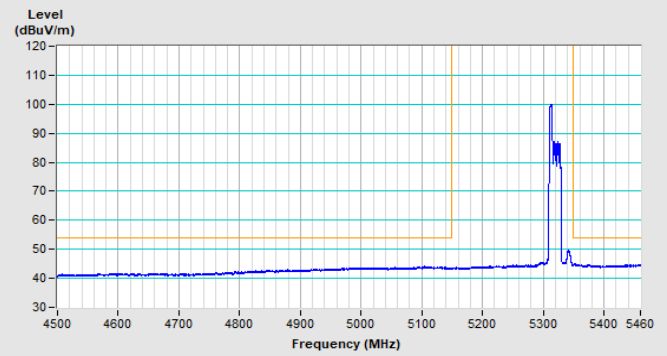

Horizontal (Average)

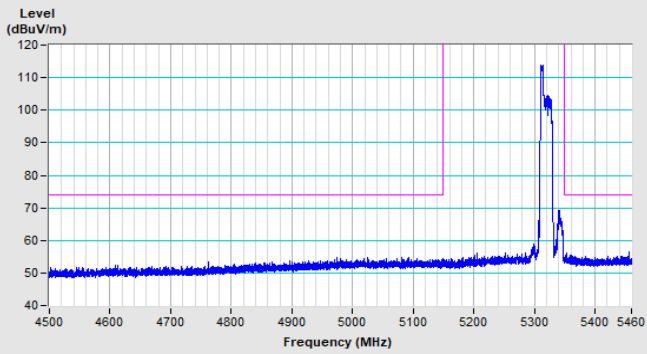


Vertical (Peak)

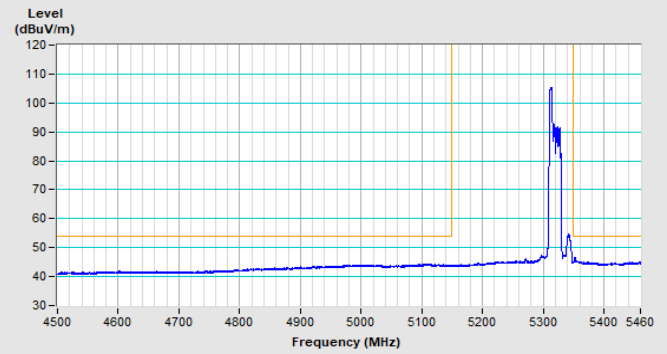


Vertical (Average)

|                 |                     |                               |                                                                      |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 5.35 GHz ~ 5.85 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT20) 52-tone RU Channel 100

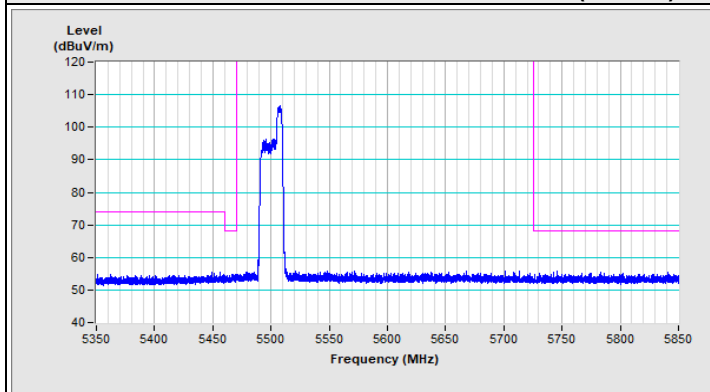


Horizontal (Peak)

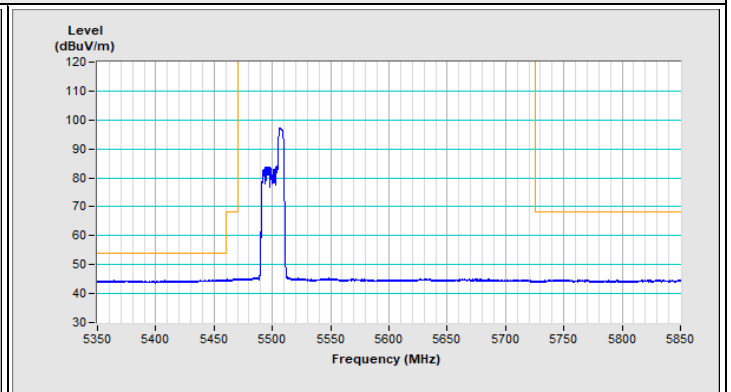

Horizontal (Average)

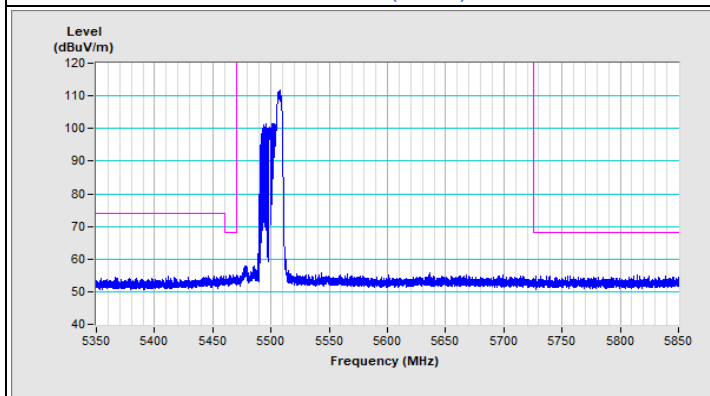


Vertical (Peak)

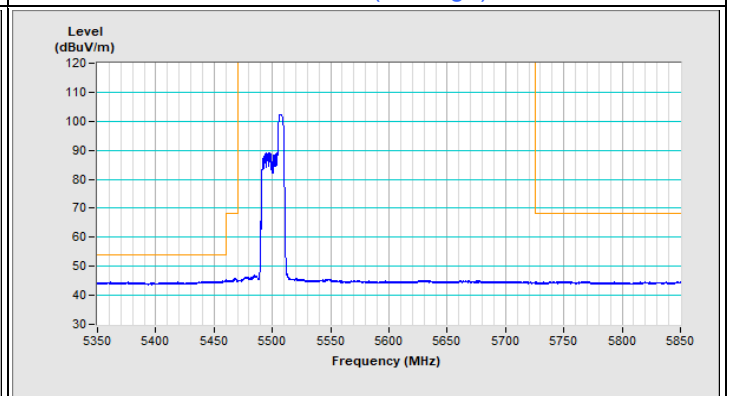


Vertical (Average)

### 802.11be (EHT20) 52-tone RU Channel 140

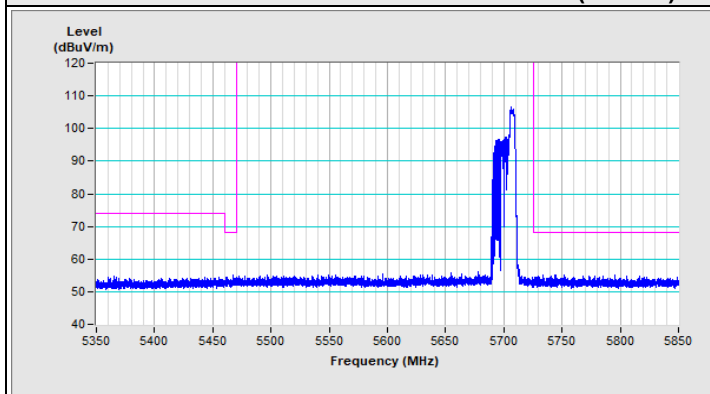


Horizontal (Peak)


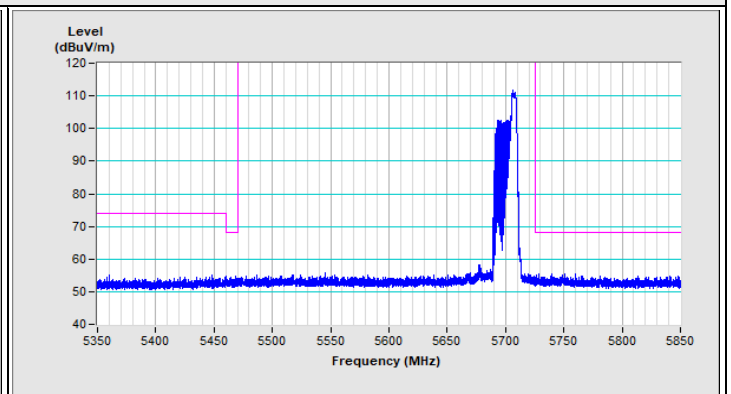




Vertical (Peak)

|                 |                     |                               |                                  |
|-----------------|---------------------|-------------------------------|----------------------------------|
| Frequency Range | 5.35 GHz ~ 5.95 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------|

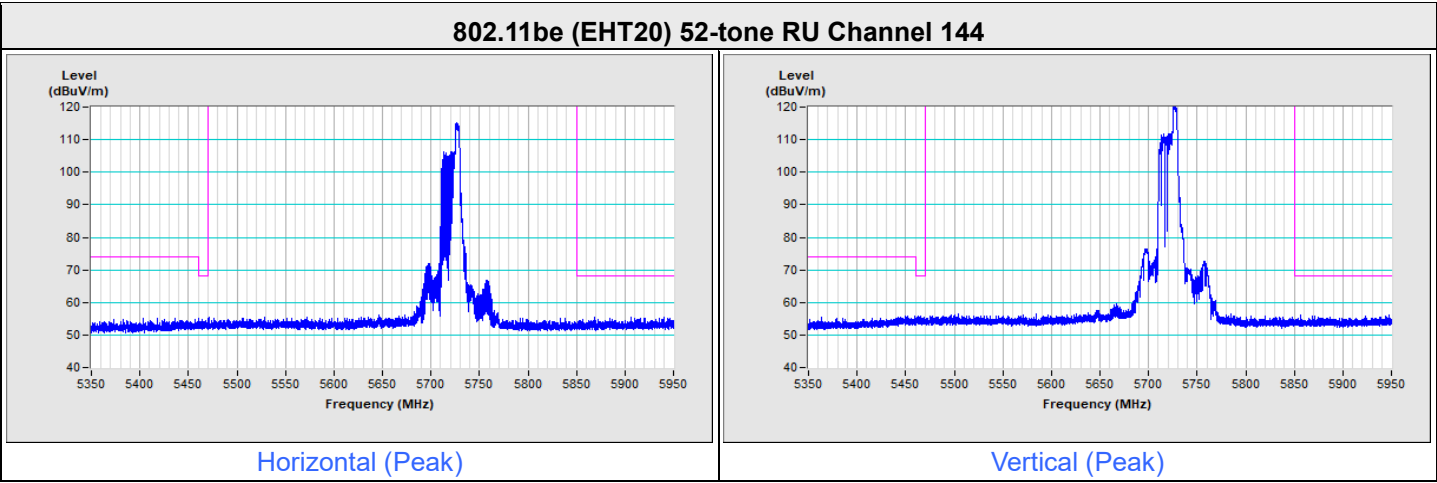


|                 |                 |                               |                                  |
|-----------------|-----------------|-------------------------------|----------------------------------|
| Frequency Range | 5.6 GHz ~ 6 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|-----------------|-------------------------------|----------------------------------|

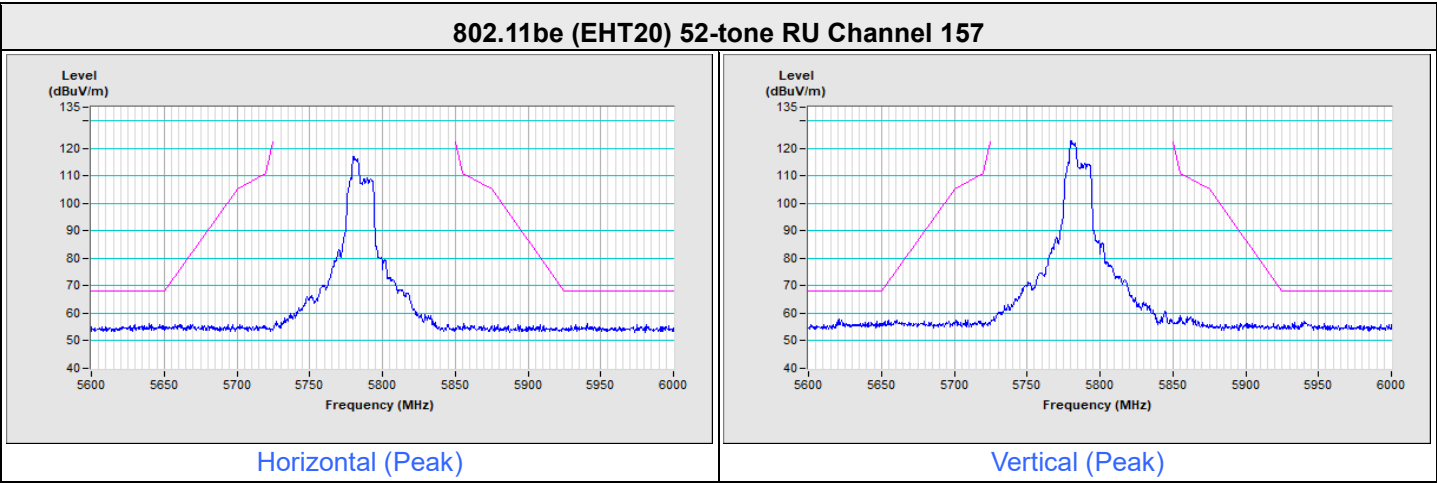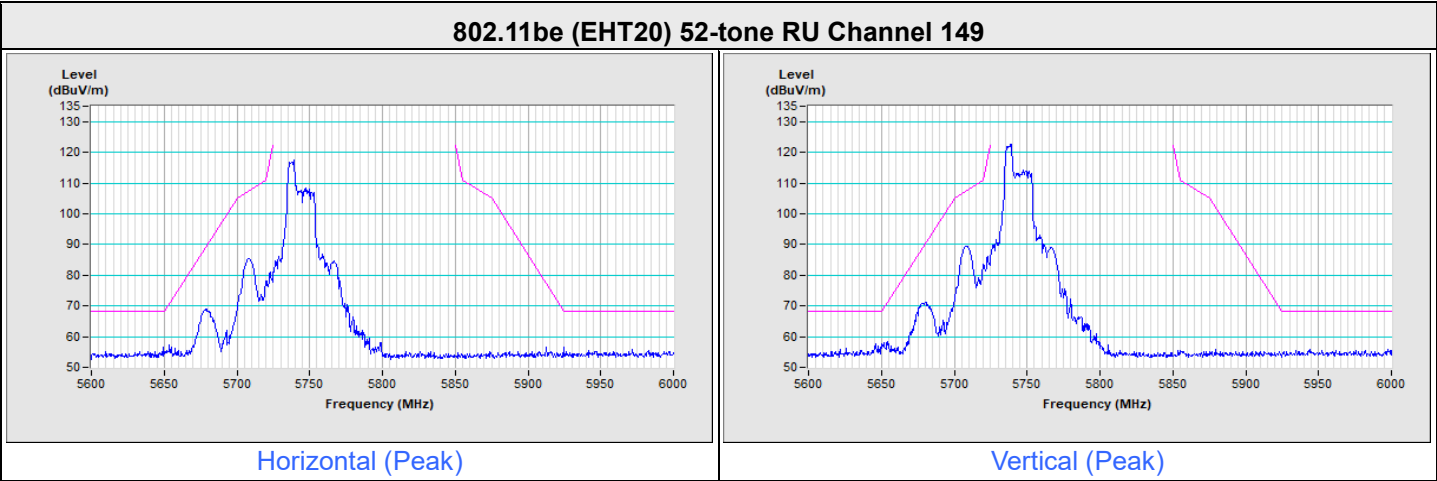

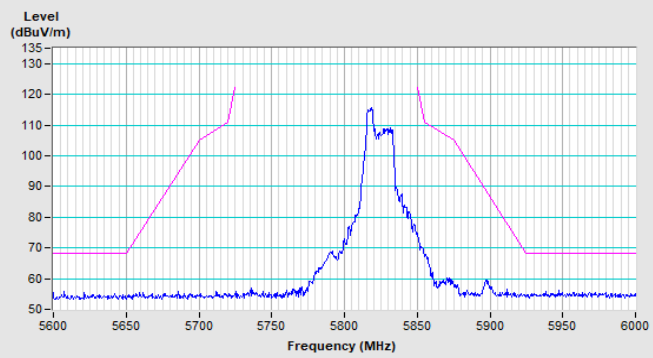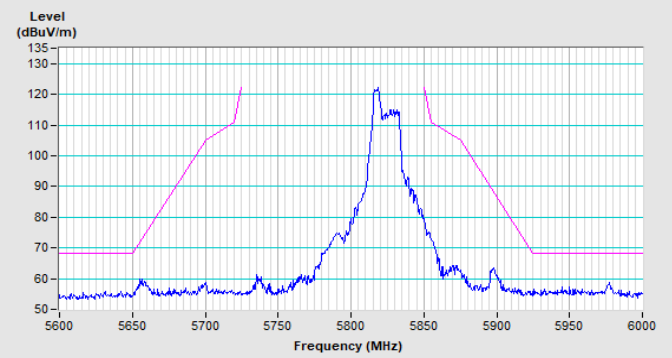
**802.11be (EHT20) 52-tone RU Channel 165****Horizontal (Peak)****Vertical (Peak)**

|                 |                    |                               |                                                                      |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 4.5 GHz ~ 5.46 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT20) 106-tone RU Channel 36

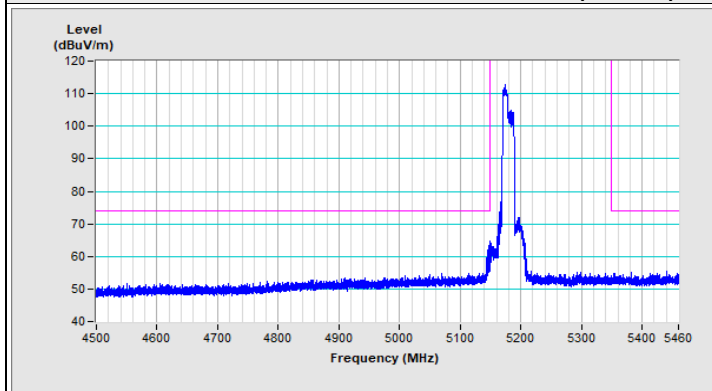


Horizontal (Peak)

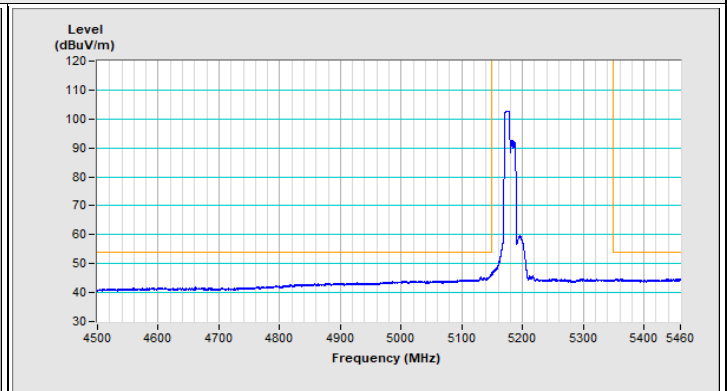

Horizontal (Average)

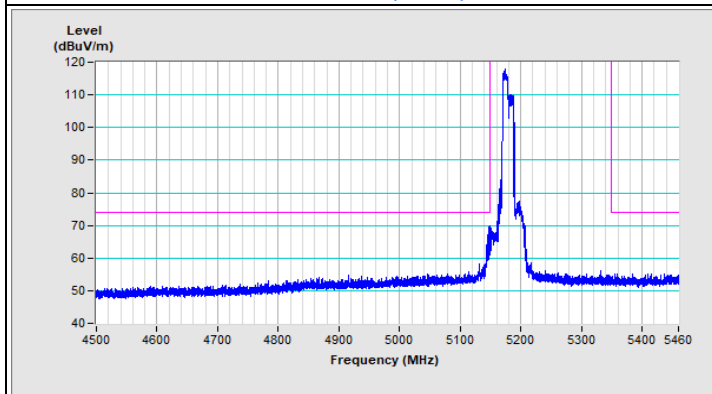


Vertical (Peak)

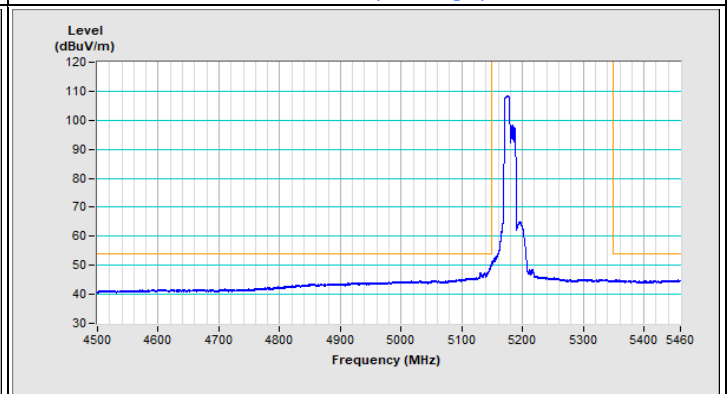


Vertical (Average)


### 802.11be (EHT20) 106-tone RU Channel 48

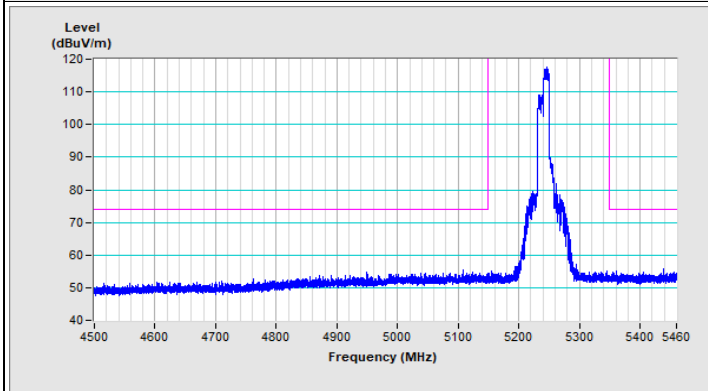


Horizontal (Peak)

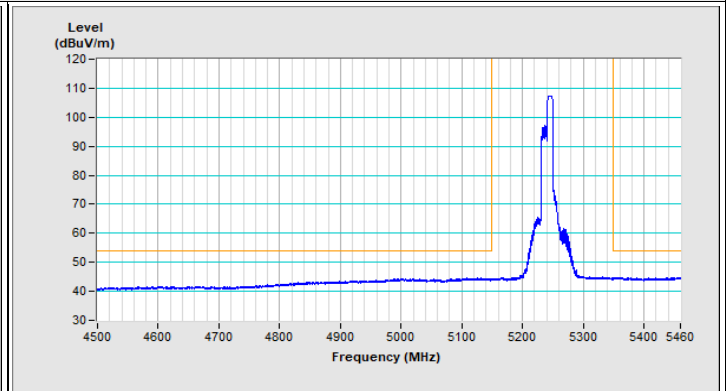

Horizontal (Average)

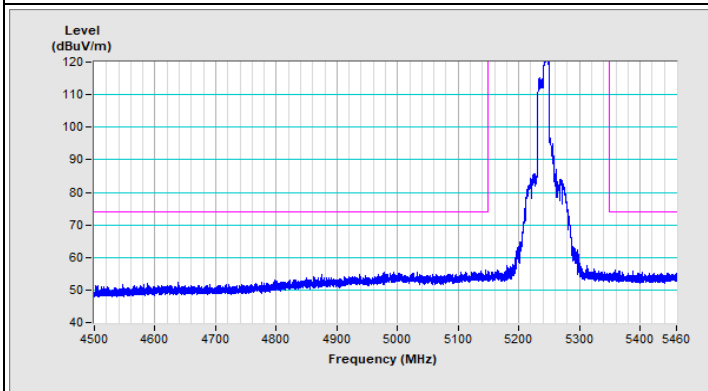


Vertical (Peak)

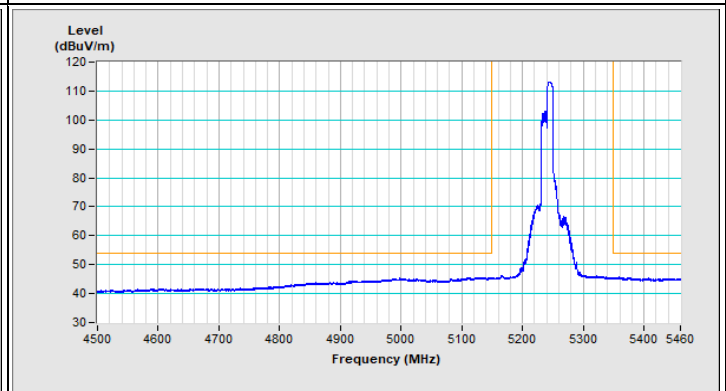


Vertical (Average)


### 802.11be (EHT20) 106-tone RU Channel 52

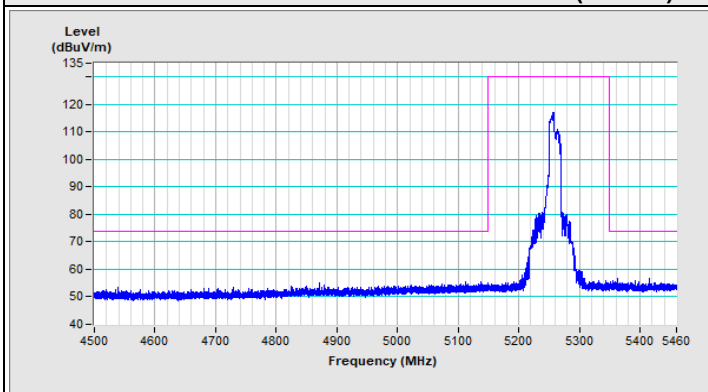


Horizontal (Peak)

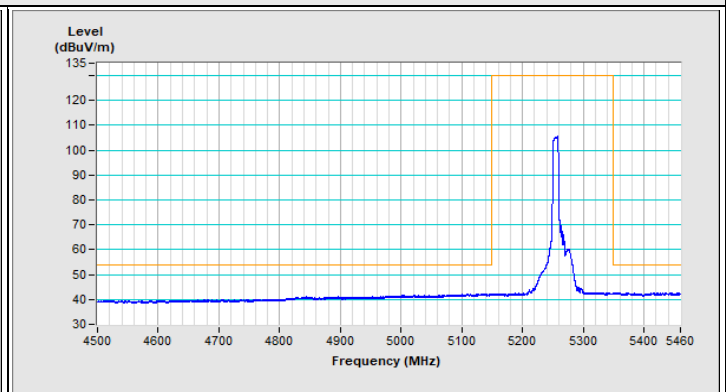

Horizontal (Average)

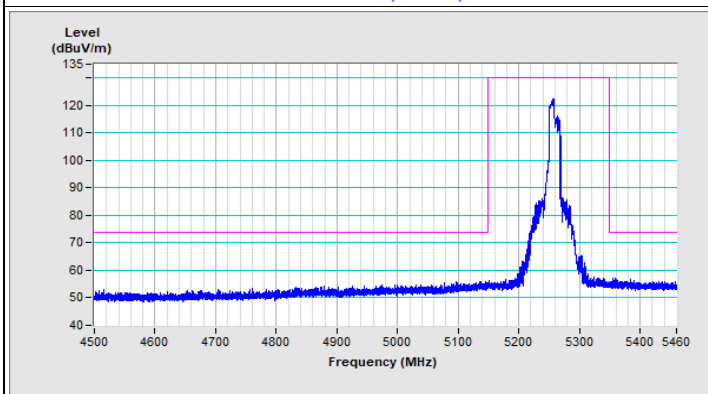


Vertical (Peak)

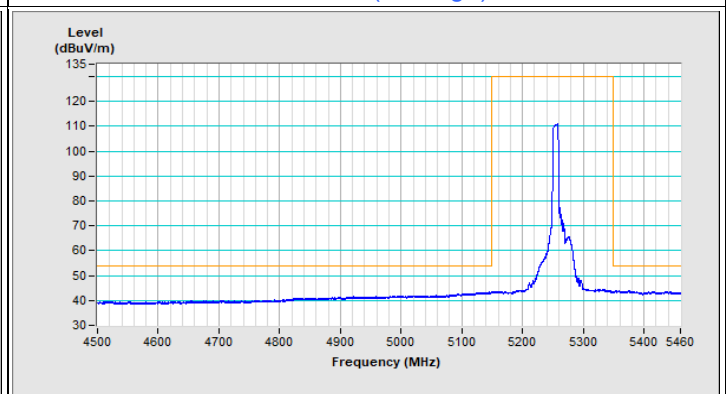


Vertical (Average)


# 802.11be (EHT20) 106-tone RU Channel 64

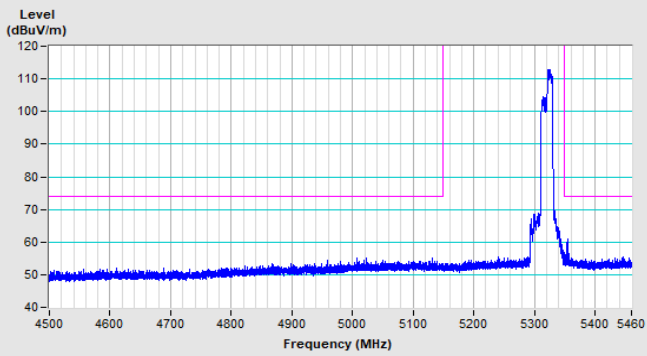


Horizontal (Peak)

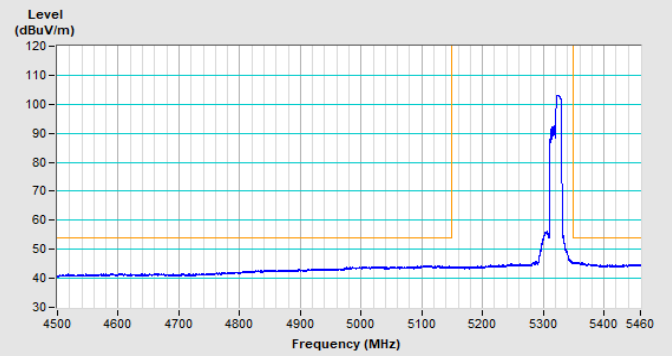

Horizontal (Average)

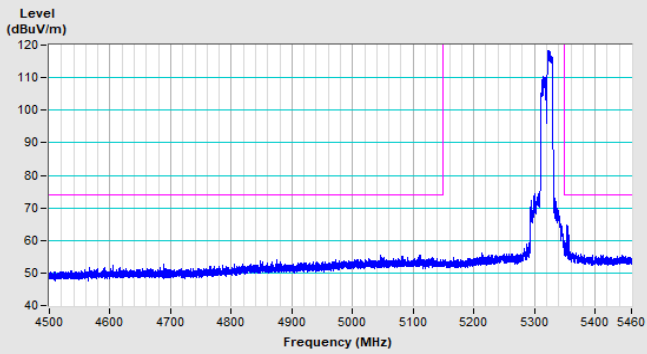


Vertical (Peak)

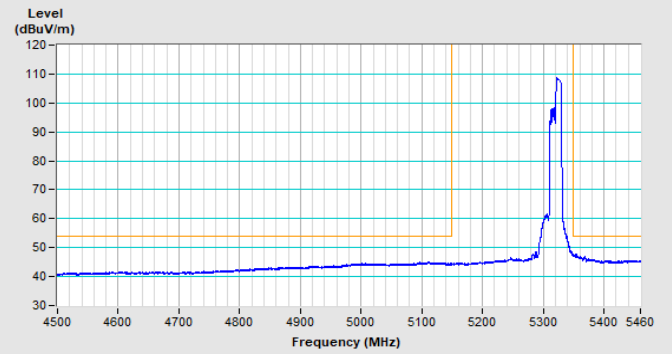


Vertical (Average)

|                 |                     |                               |                                                                      |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 5.35 GHz ~ 5.85 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|

### 802.11be (EHT20) 106-tone RU Channel 100

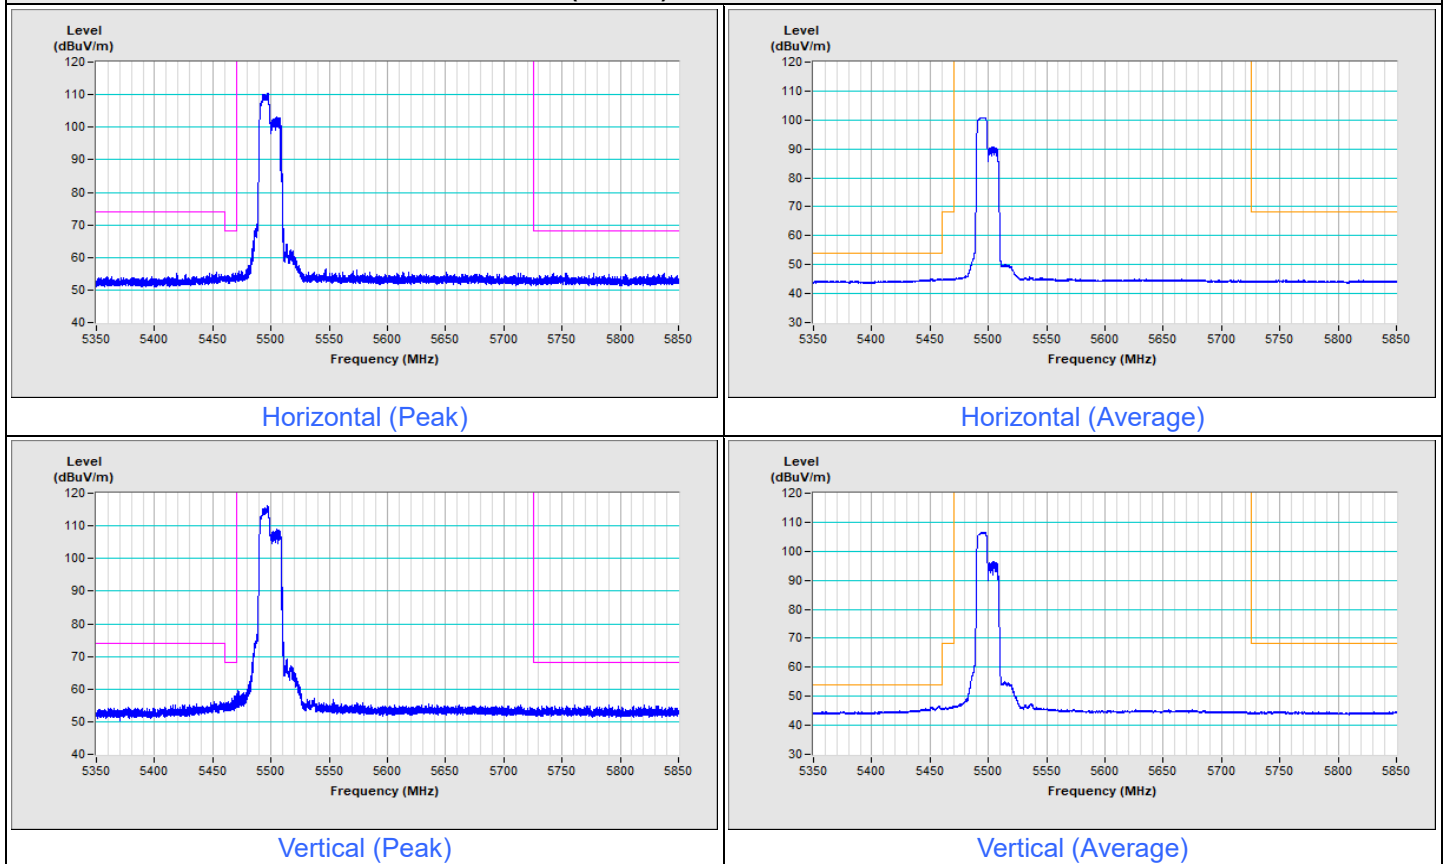


### 802.11be (EHT20) 106-tone RU Channel 140

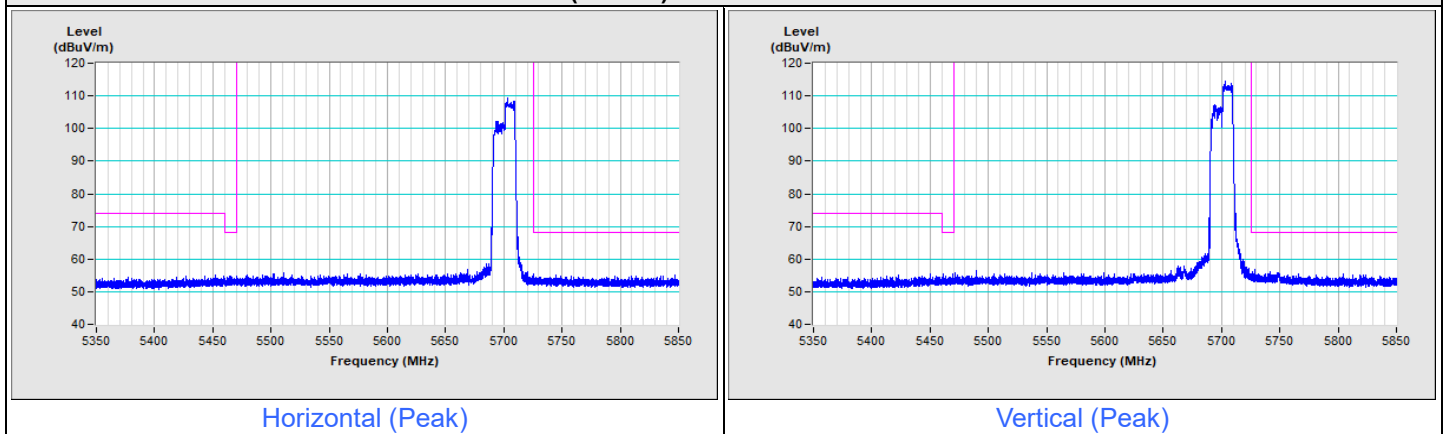


|                 |                     |                               |                                  |
|-----------------|---------------------|-------------------------------|----------------------------------|
| Frequency Range | 5.35 GHz ~ 5.95 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------|

### 802.11be (EHT20) 106-tone RU Channel 144

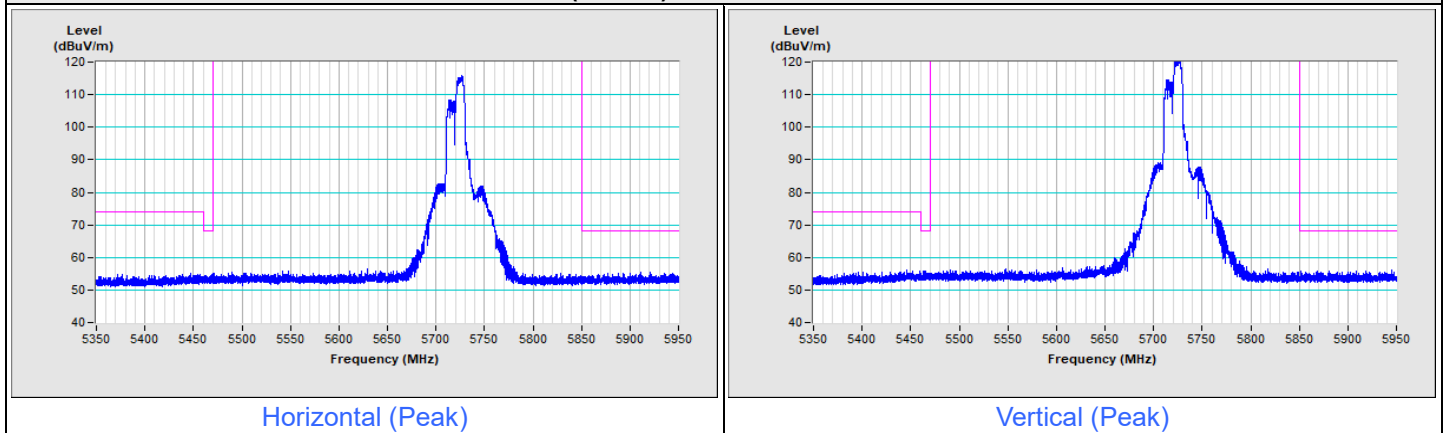




|                 |                 |                               |                                  |
|-----------------|-----------------|-------------------------------|----------------------------------|
| Frequency Range | 5.6 GHz ~ 6 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|-----------------|-------------------------------|----------------------------------|

### 802.11be (EHT20) 106-tone RU Channel 149

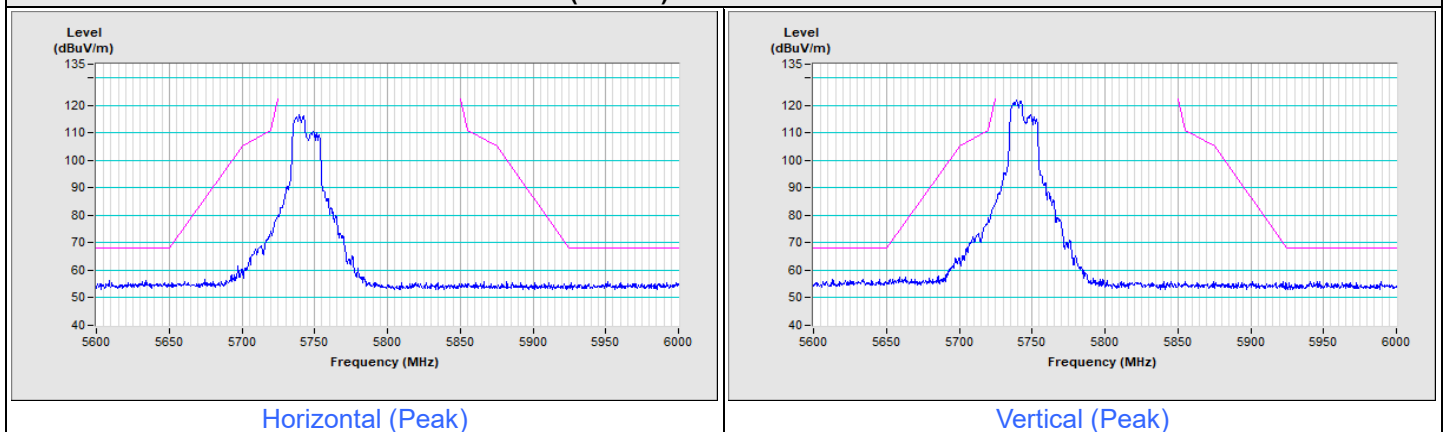

### 802.11be (EHT20) 106-tone RU Channel 157

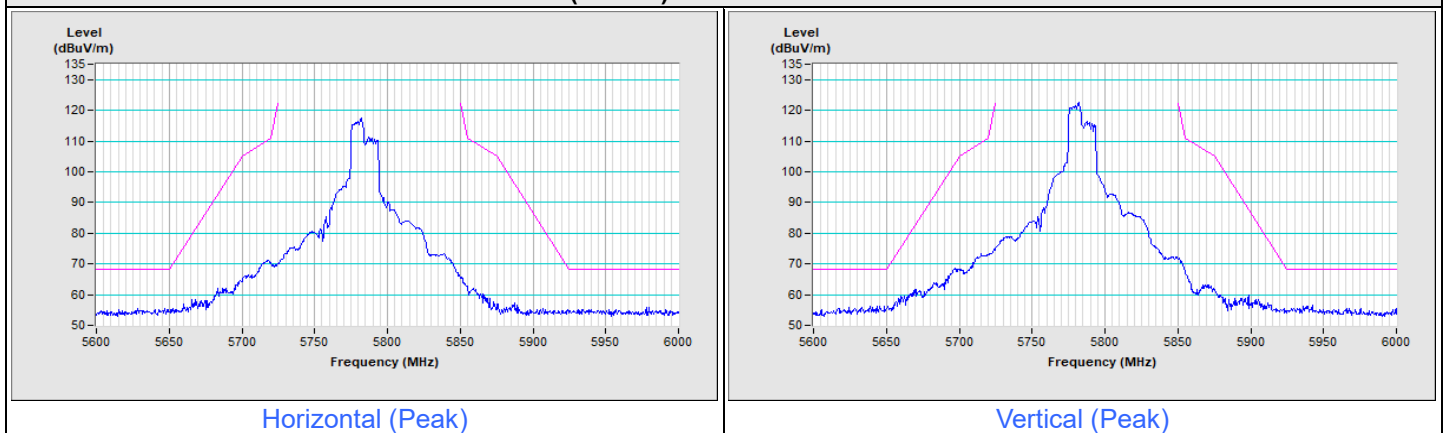


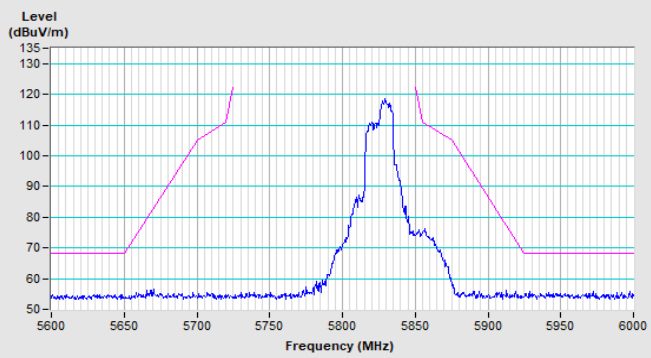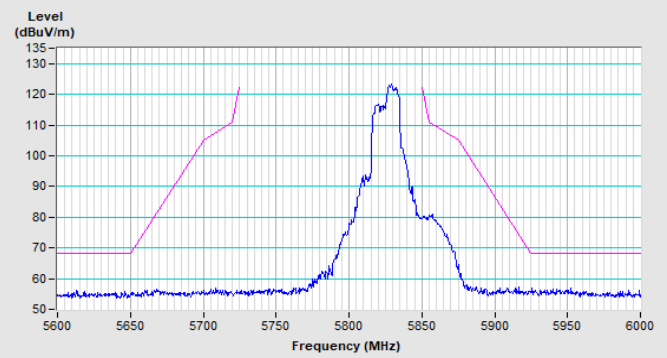**802.11be (EHT20) 106-tone RU Channel 165****Horizontal (Peak)****Vertical (Peak)**


## Mode A\_2Tx

|                 |                    |                               |                                                                      |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 4.5 GHz ~ 5.46 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11a Channel 36

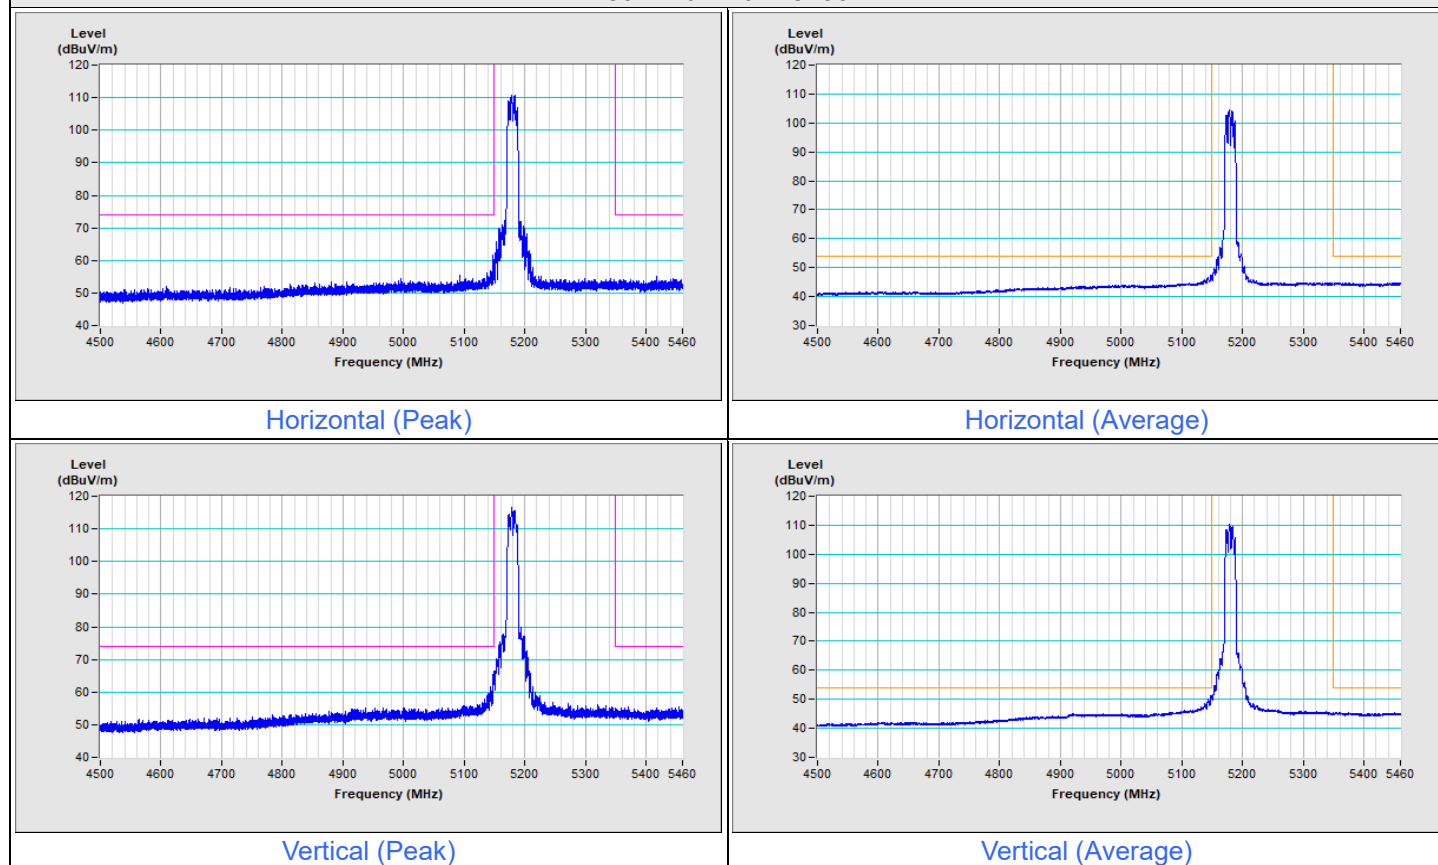


### 802.11a Channel 48

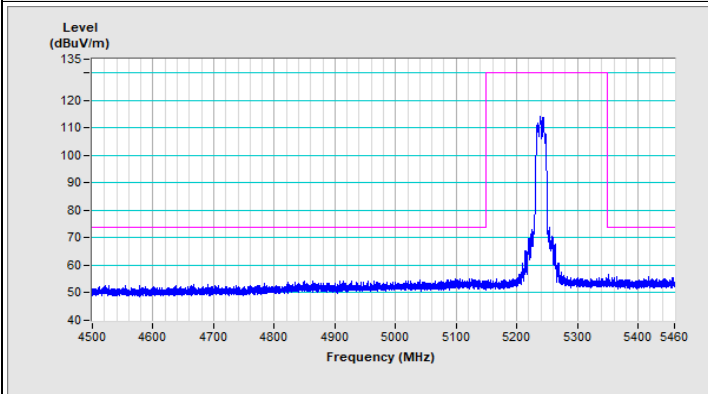


Horizontal (Peak)

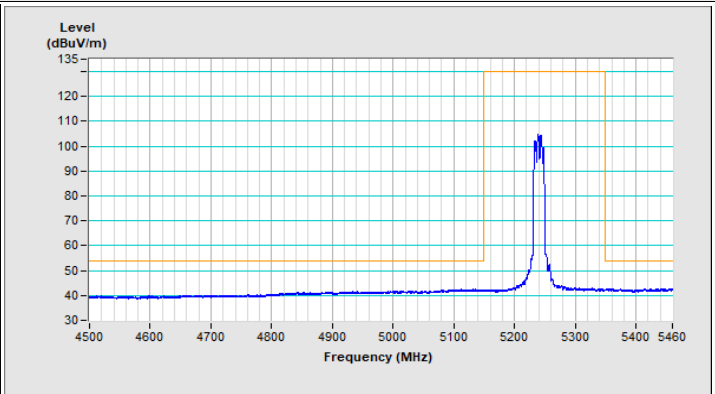

Horizontal (Average)

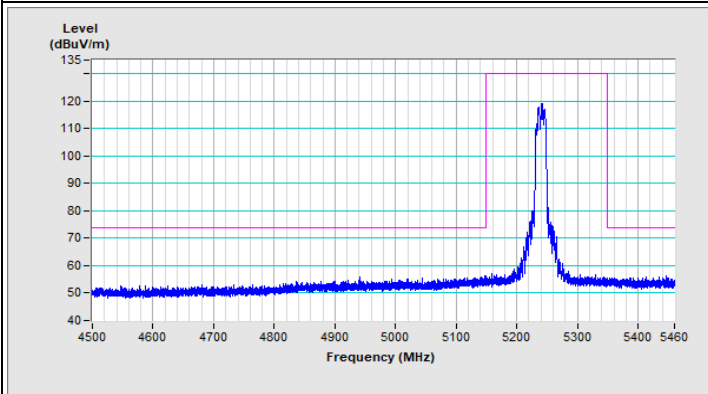


Vertical (Peak)

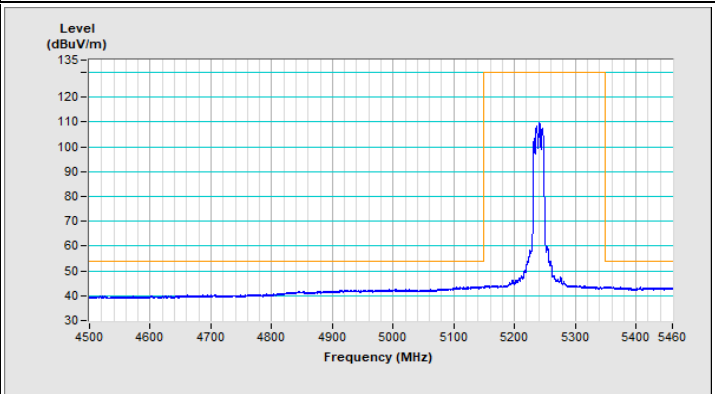


Vertical (Average)


### 802.11a Channel 52

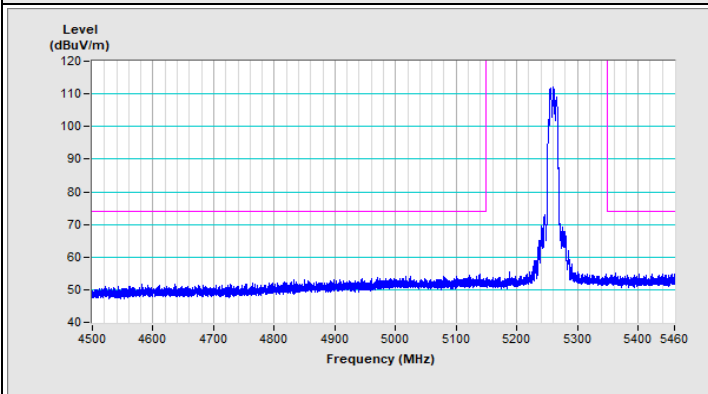


Horizontal (Peak)

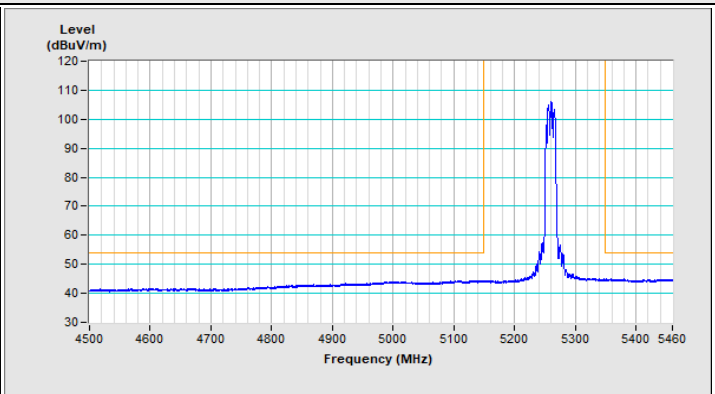

Horizontal (Average)

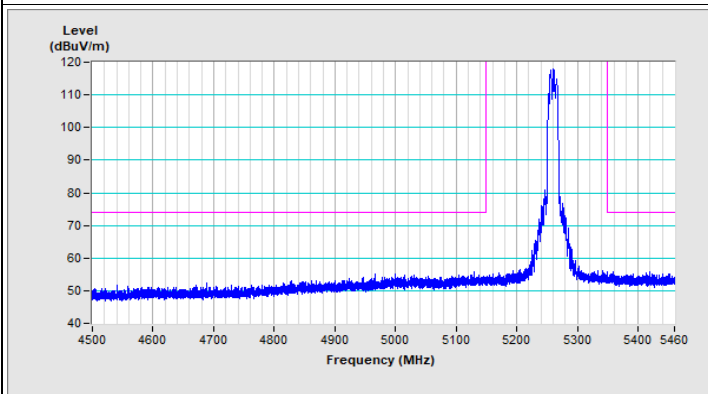


Vertical (Peak)

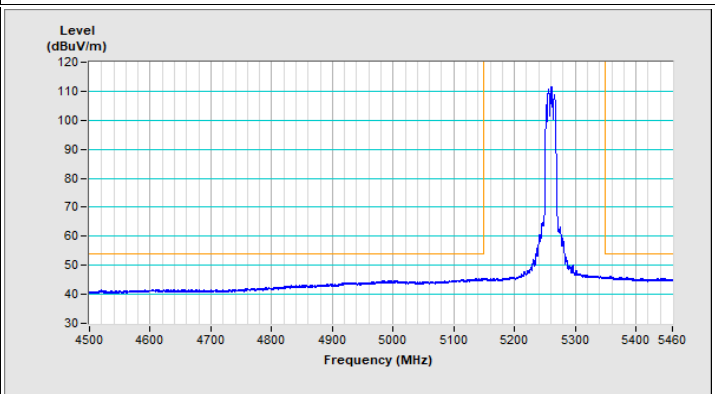


Vertical (Average)


## 802.11a Channel 64

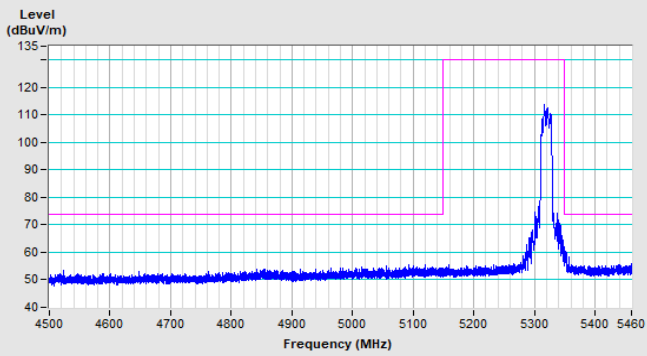


Horizontal (Peak)

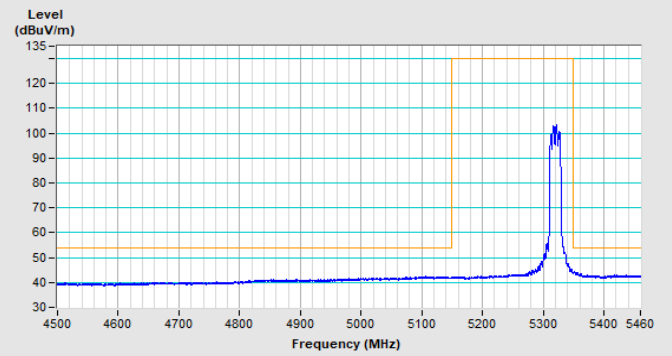

Horizontal (Average)

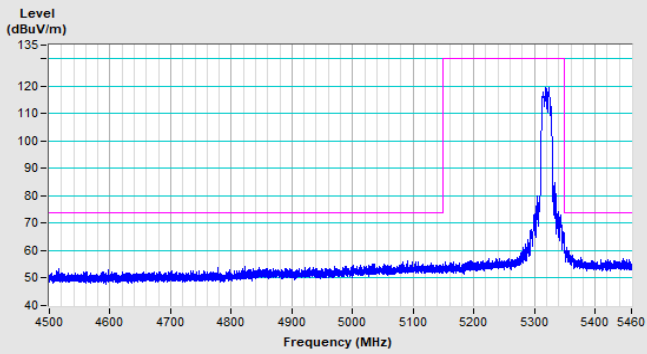


Vertical (Peak)

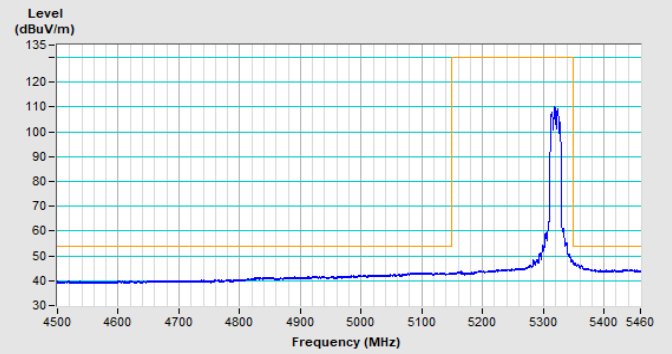


Vertical (Average)

|                 |                     |                               |                                                                      |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 5.35 GHz ~ 5.85 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11a Channel 100

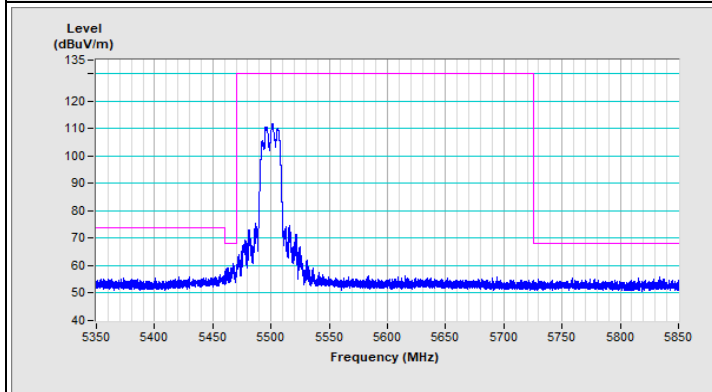


Horizontal (Peak)

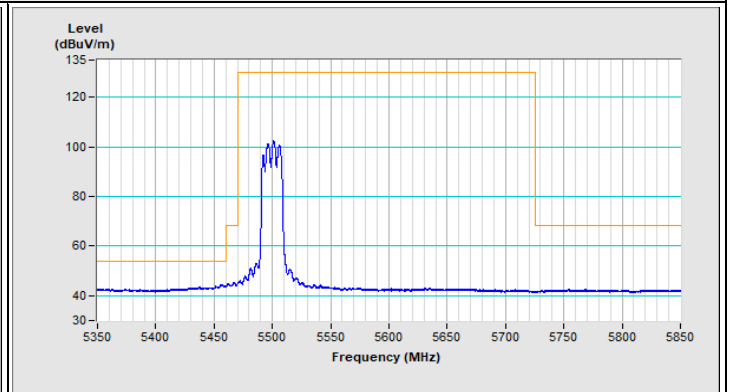

Horizontal (Average)

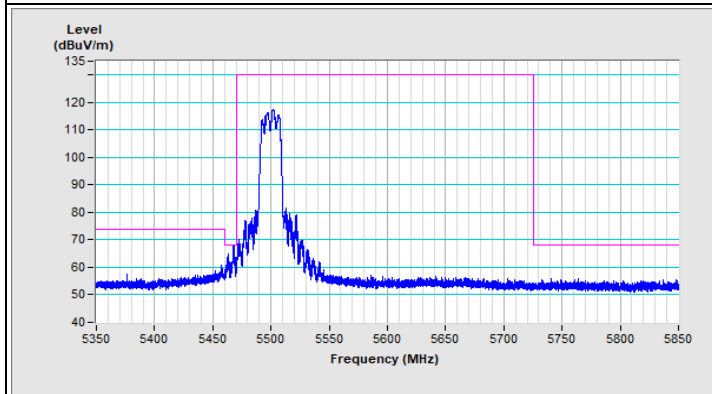


Vertical (Peak)

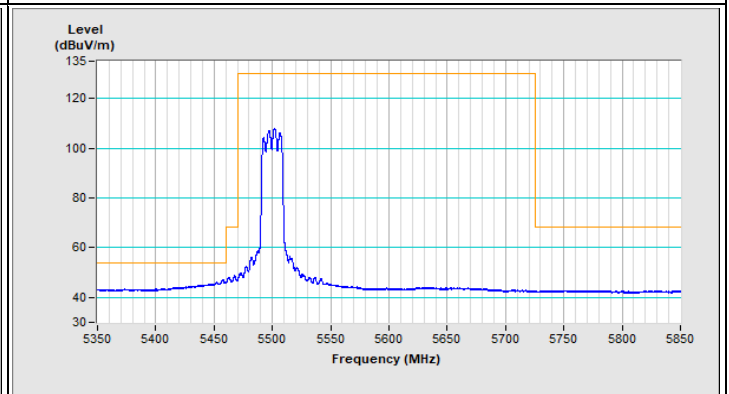


Vertical (Average)

### 802.11a Channel 140

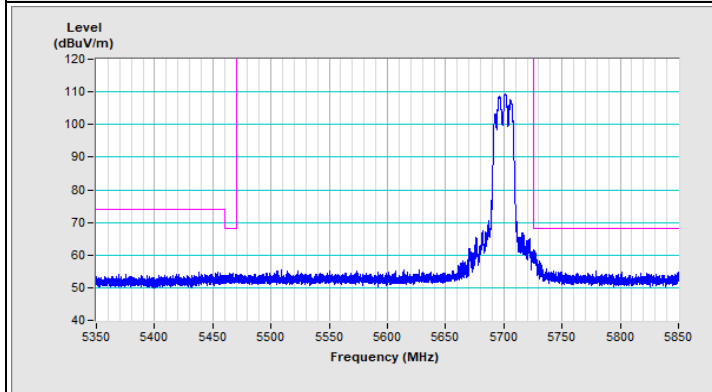


Horizontal (Peak)

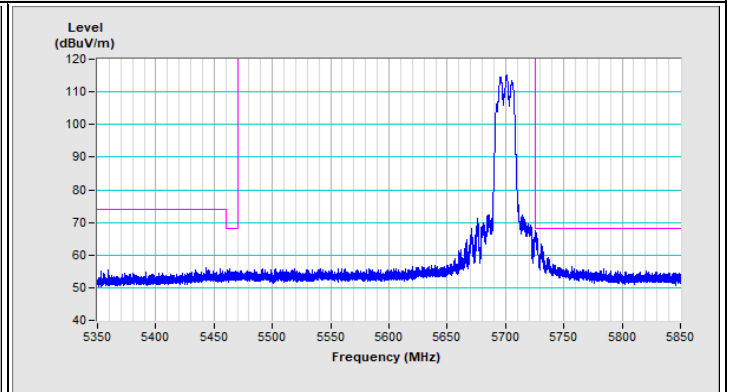

Vertical (Peak)


|                 |                     |                               |                                  |
|-----------------|---------------------|-------------------------------|----------------------------------|
| Frequency Range | 5.35 GHz ~ 5.95 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------|

#### 802.11a Channel 144

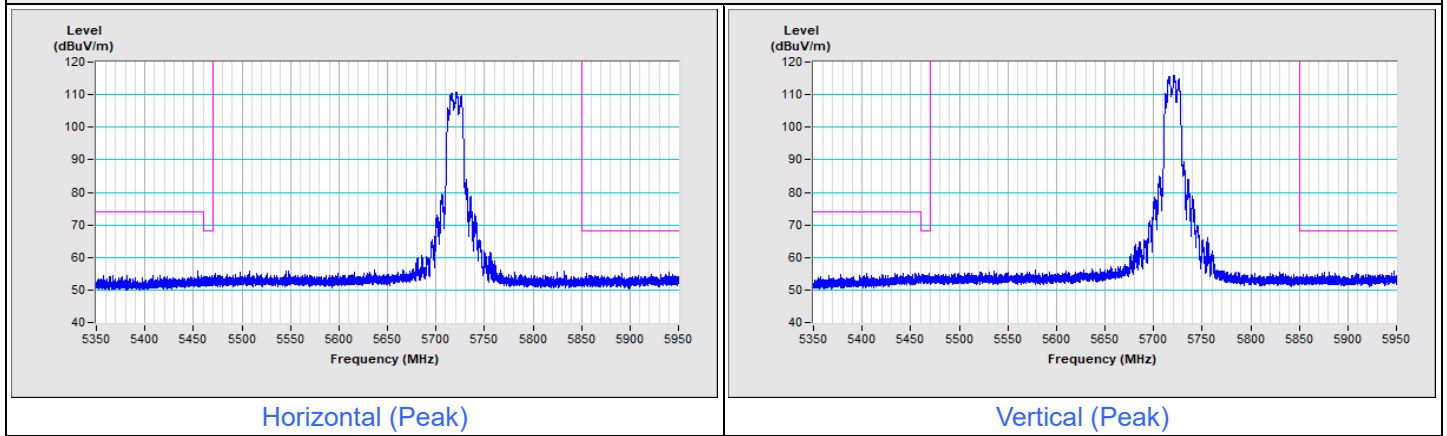



|                 |                 |                               |                                  |
|-----------------|-----------------|-------------------------------|----------------------------------|
| Frequency Range | 5.6 GHz ~ 6 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|-----------------|-------------------------------|----------------------------------|

#### 802.11a Channel 149

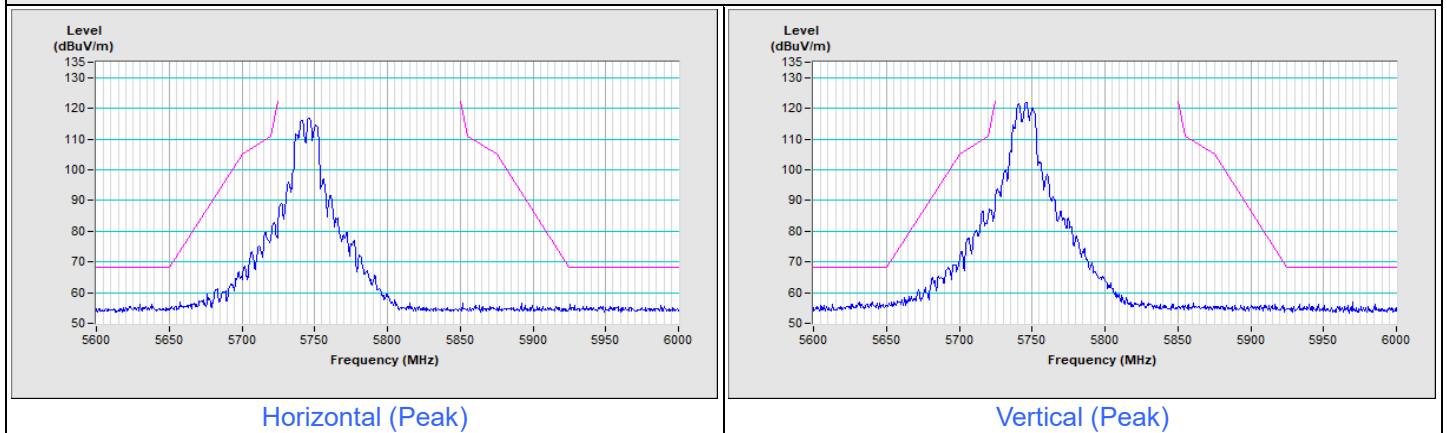


#### 802.11a Channel 157

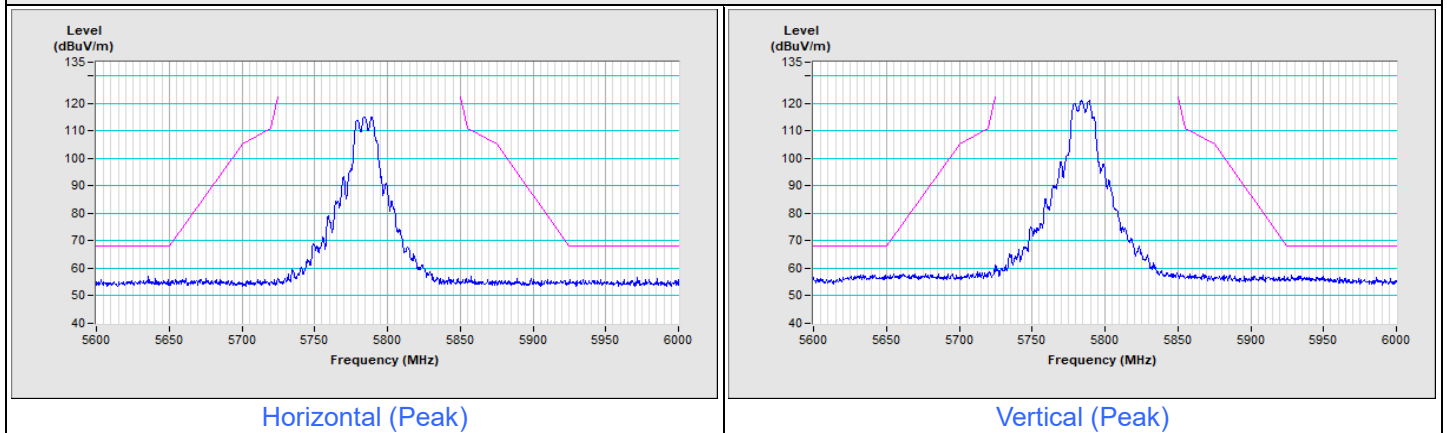

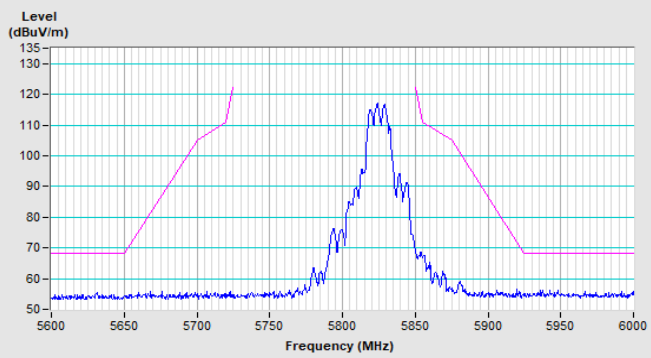**802.11a Channel 165**


Horizontal (Peak)

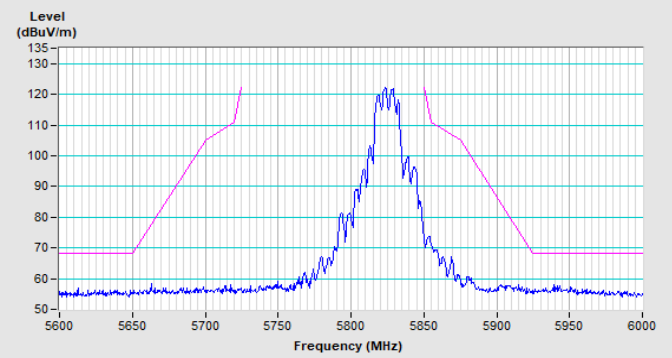


Vertical (Peak)

|                 |                    |                               |                                                                      |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 4.5 GHz ~ 5.46 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|--------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT20) Channel 36

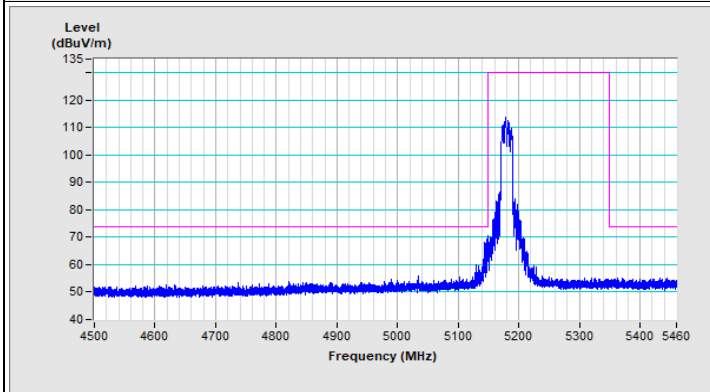


Horizontal (Peak)

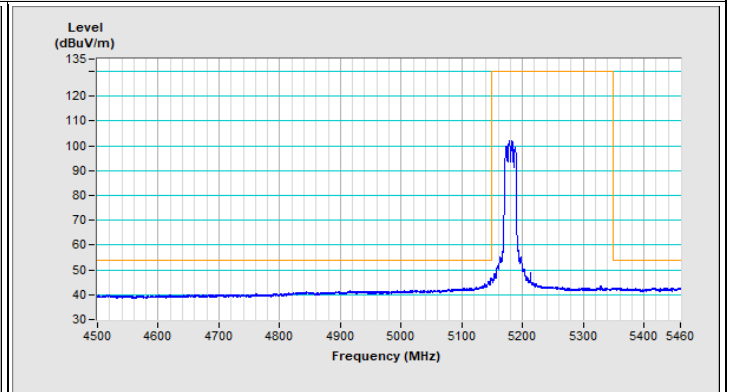

Horizontal (Average)

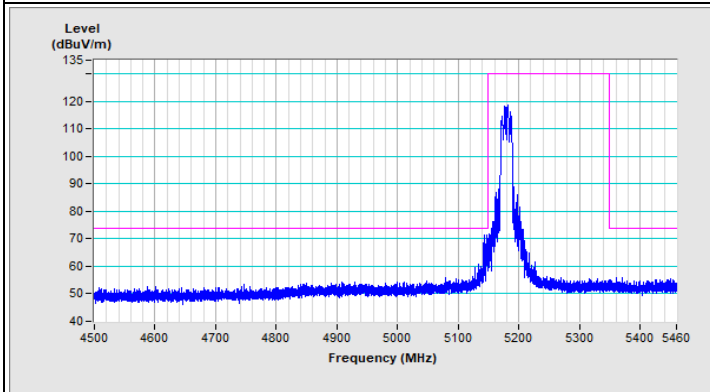


Vertical (Peak)

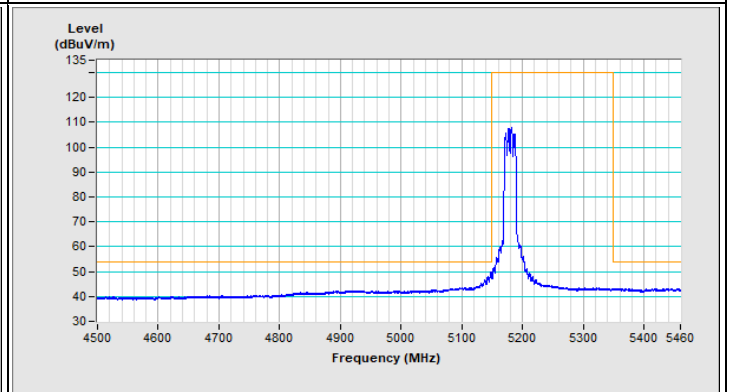


Vertical (Average)


### 802.11be (EHT20) Channel 48

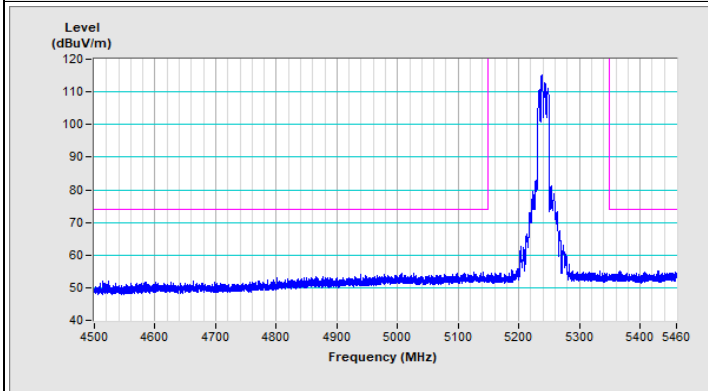


Horizontal (Peak)

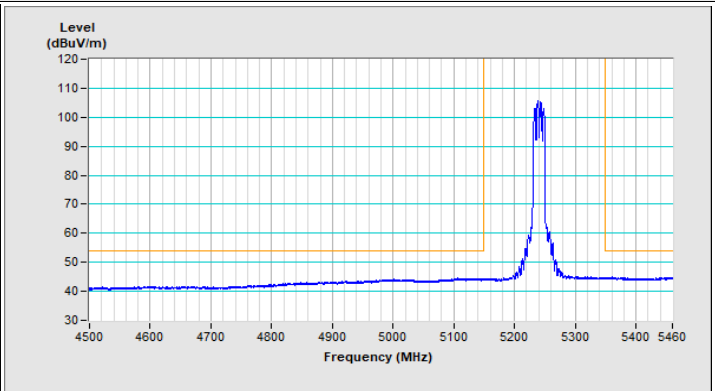

Horizontal (Average)

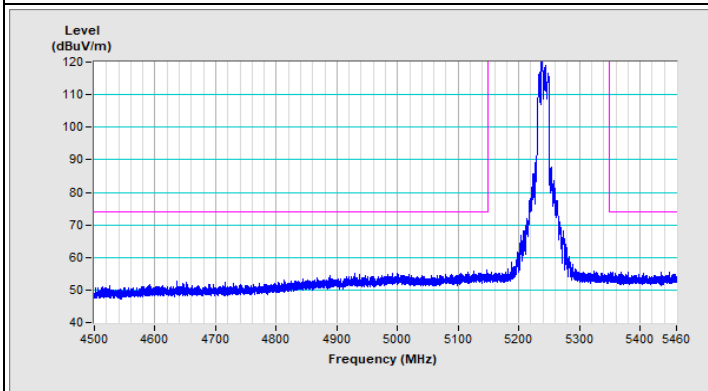


Vertical (Peak)

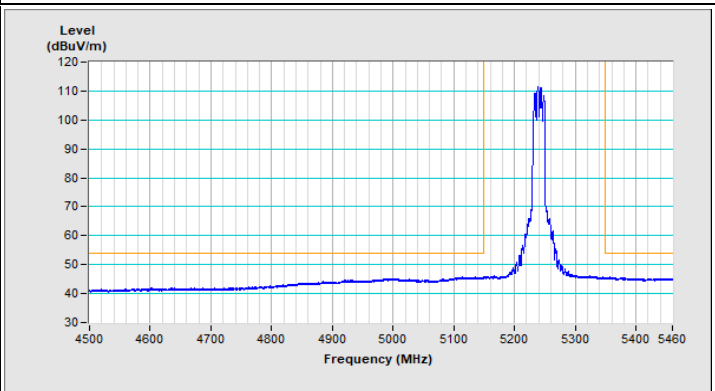


Vertical (Average)


### 802.11be (EHT20) Channel 52

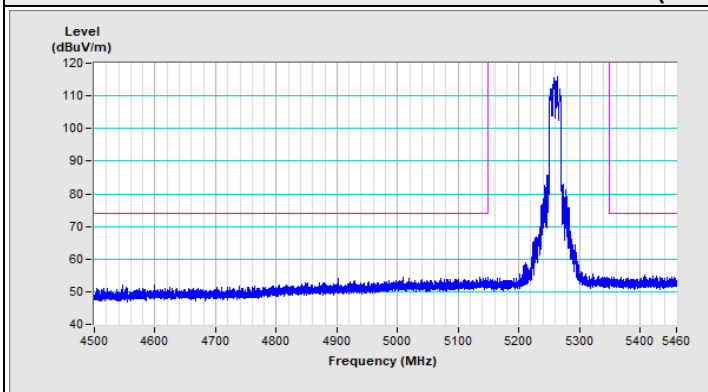


Horizontal (Peak)

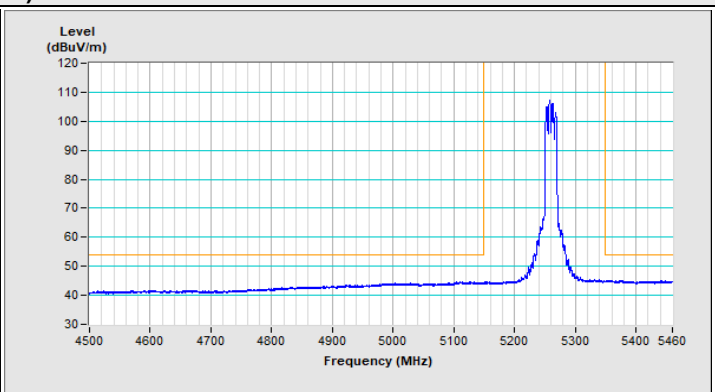

Horizontal (Average)

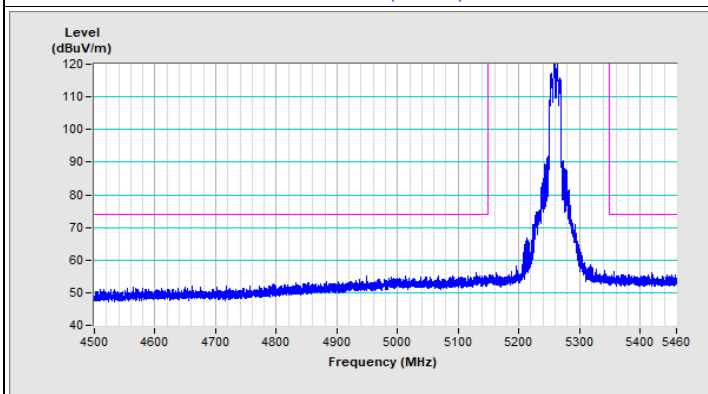


Vertical (Peak)

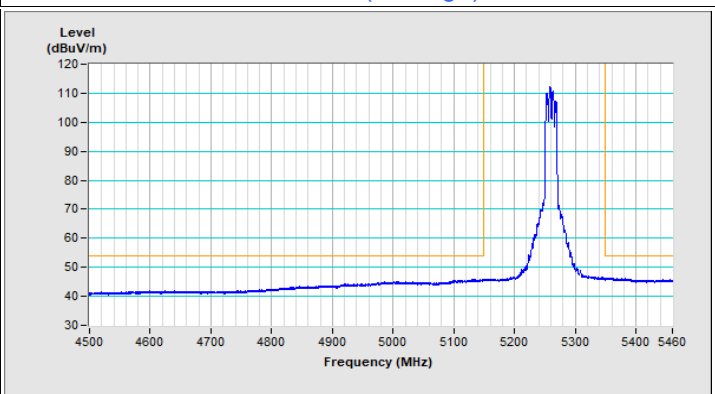


Vertical (Average)


### 802.11be (EHT20) Channel 64

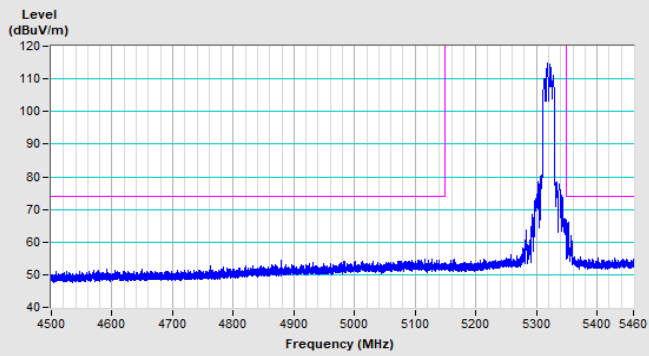


Horizontal (Peak)

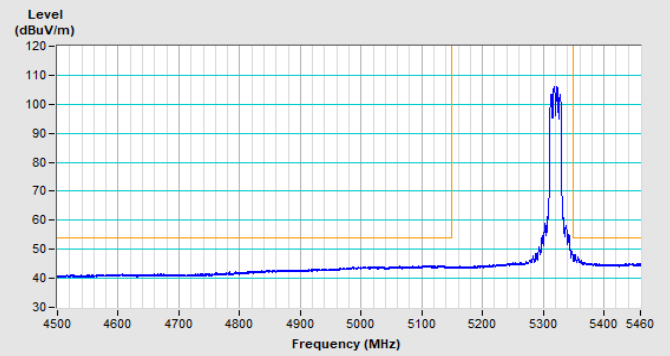

Horizontal (Average)

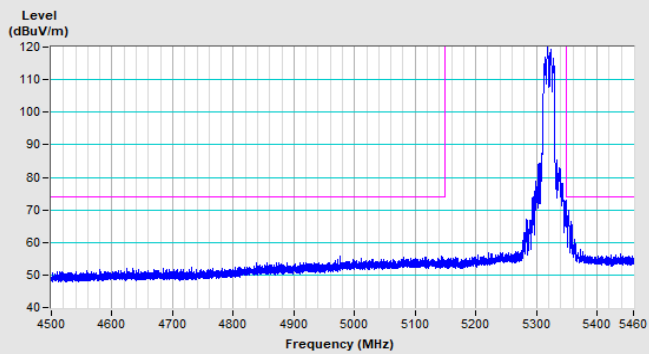


Vertical (Peak)

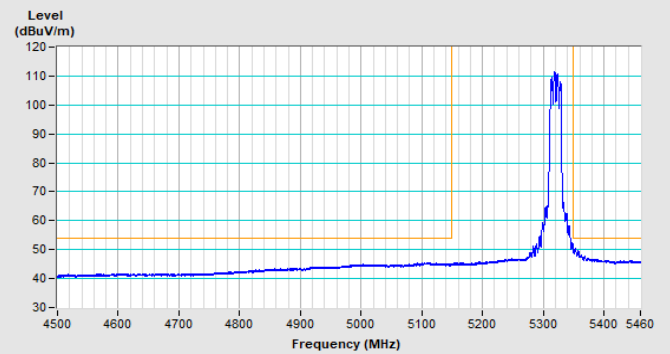


Vertical (Average)

|                 |                     |                               |                                                                      |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|
| Frequency Range | 5.35 GHz ~ 5.85 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak<br>AV: RB=1 MHz, VB=10 Hz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------------------------------------------|


### 802.11be (EHT20) Channel 100

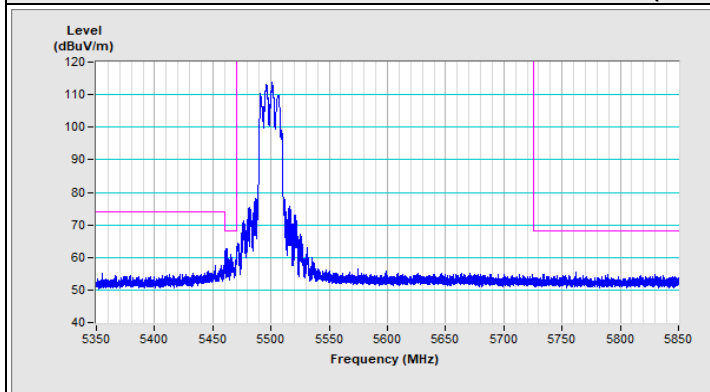


Horizontal (Peak)

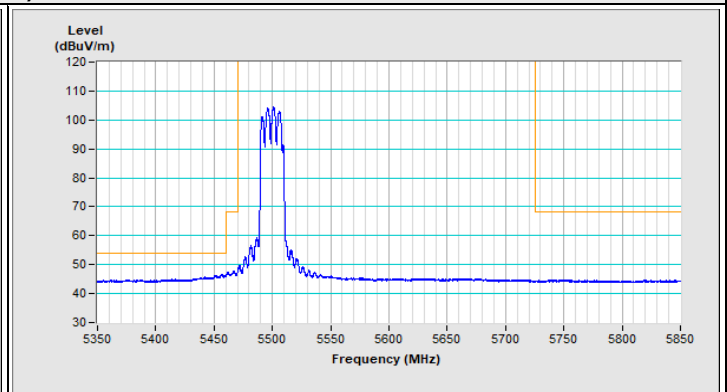

Horizontal (Average)

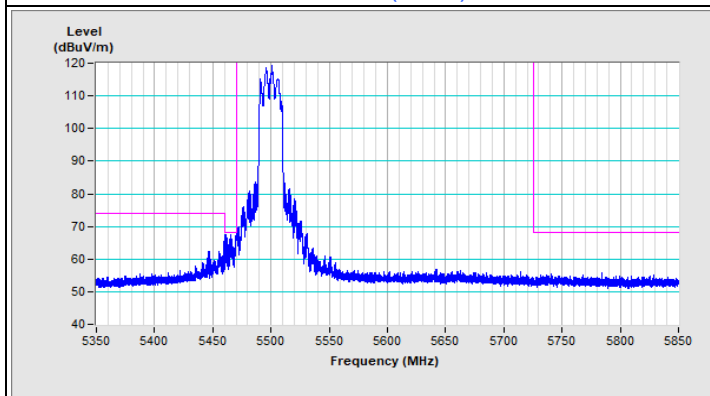


Vertical (Peak)

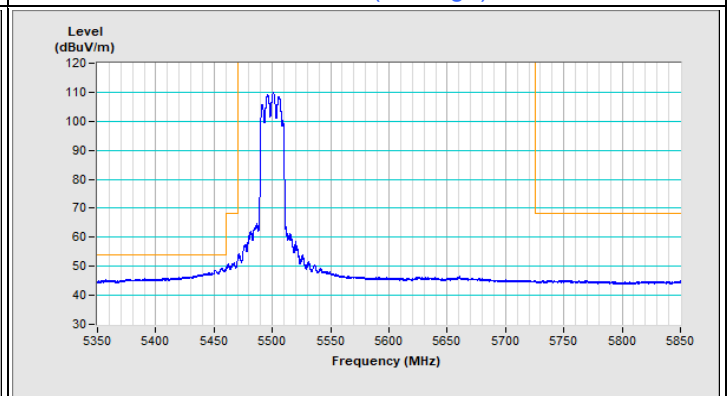


Vertical (Average)

### 802.11be (EHT20) Channel 140

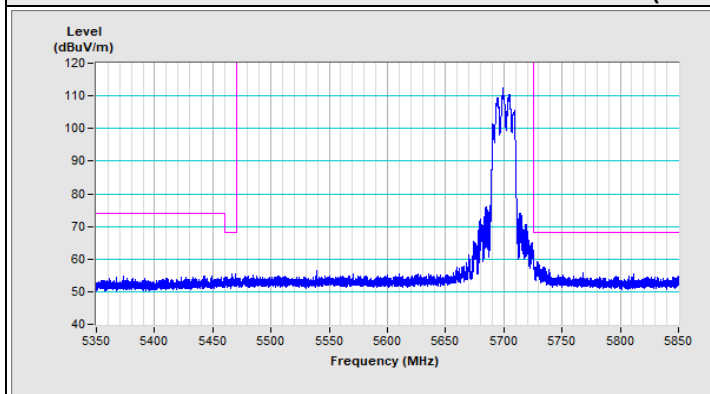


Horizontal (Peak)

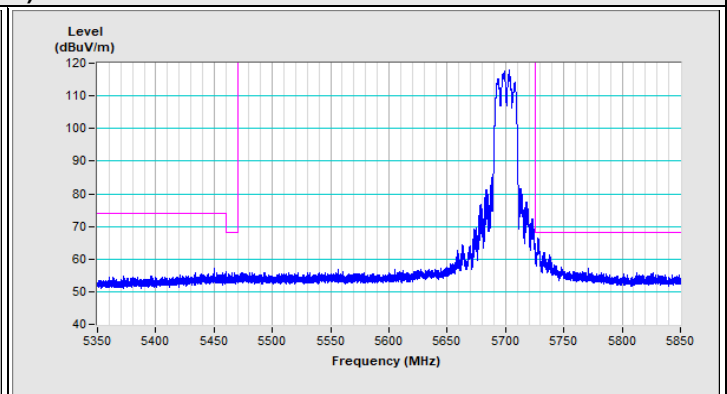

Vertical (Peak)

|                 |                     |                               |                                  |
|-----------------|---------------------|-------------------------------|----------------------------------|
| Frequency Range | 5.35 GHz ~ 5.95 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|---------------------|-------------------------------|----------------------------------|

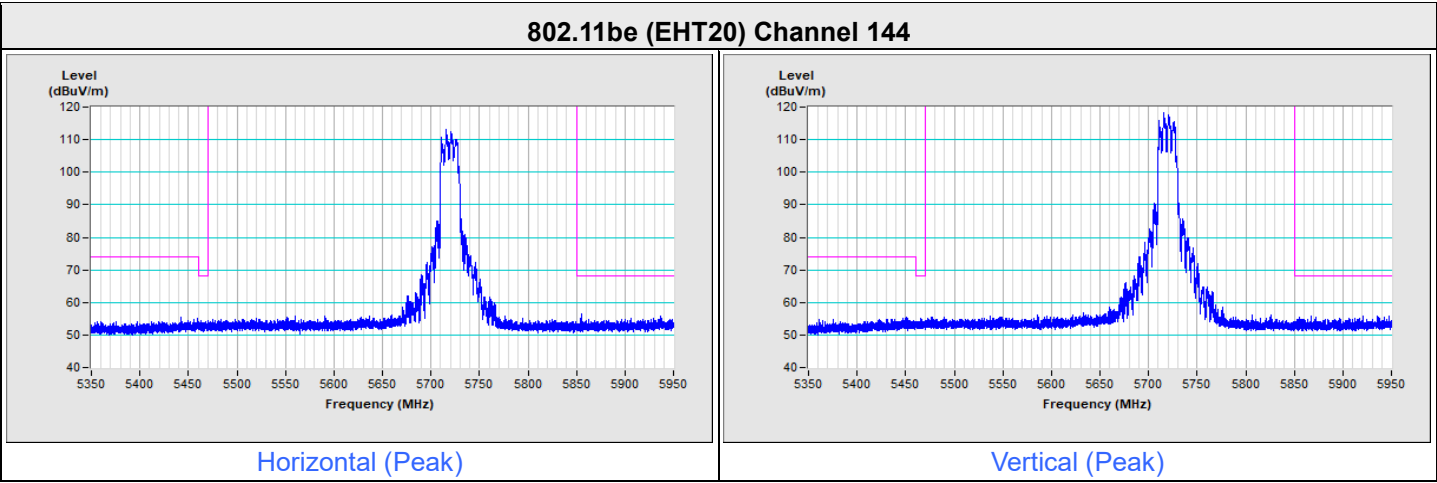

|                 |                 |                               |                                  |
|-----------------|-----------------|-------------------------------|----------------------------------|
| Frequency Range | 5.6 GHz ~ 6 GHz | Detector Function & Bandwidth | PK: RB=1 MHz, VB=3 MHz, DET=Peak |
|-----------------|-----------------|-------------------------------|----------------------------------|

