

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Report No.: RFBBUI-WTW-P23070201B
FCC ID: TX2-RTL8922AE
Product: 11be RTL8922AE Combo module
Brand: REALTEK
Model No.: RTL8922AE
Received Date: 2024/1/26
Test Date: 2024/2/22 ~ 2024/6/12
Issued Date: 2024/6/13
Applicant: Realtek Semiconductor Corp.
Address: No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory
Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration / 723255 / TW2022
Designation Number:

Approved by: _____



May Chen / Manager

, Date: _____

2024/6/13

This test report consists of 409 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Vito Lung / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 General Description.....	6
3.2 Antenna Description of EUT.....	8
3.3 Channel List.....	9
3.4 Test Mode Applicability and Tested Channel Detail.....	10
3.5 Duty Cycle of Test Signal.....	12
3.6 Test Program Used and Operation Descriptions	15
3.7 Connection Diagram of EUT and Peripheral Devices	15
3.8 Configuration of Peripheral Devices and Cable Connections	16
4 Test Instruments	17
4.1 RF Output Power.....	17
4.2 AC Power Conducted Emissions	17
4.3 Unwanted Emissions below 1 GHz	18
4.4 Unwanted Emissions above 1 GHz.....	19
5 Limits of Test Items.....	20
5.1 RF Output Power.....	20
5.2 AC Power Conducted Emissions	20
5.3 Unwanted Emissions below 1 GHz	20
5.4 Unwanted Emissions above 1 GHz.....	21
6 Test Arrangements.....	22
6.1 RF Output Power.....	22
6.1.1 Test Setup	22
6.1.2 Test Procedure.....	22
6.2 AC Power Conducted Emissions	22
6.2.1 Test Setup	22
6.2.2 Test Procedure.....	22
6.3 Unwanted Emissions below 1 GHz	23
6.3.1 Test Setup	23
6.3.2 Test Procedure.....	24
6.4 Unwanted Emissions above 1 GHz.....	25
6.4.1 Test Setup	25
6.4.2 Test Procedure.....	25
7 Test Results of Test Item	26
7.1 RF Output Power.....	26
7.2 AC Power Conducted Emissions	32
7.3 Unwanted Emissions below 1 GHz	36
7.4 Unwanted Emissions above 1 GHz.....	44
8 Pictures of Test Arrangements	408
9 Information of the Testing Laboratories	409

Release Control Record

Issue No.	Description	Date Issued
RFBBUI-WTW-P23070201B	Original release.	2024/6/13

1 Certificate

Product: 11be RTL8922AE Combo module

Brand: REALTEK

Test Model: RTL8922AE

Sample Status: Engineering sample

Applicant: Realtek Semiconductor Corp.

Test Date: 2024/2/22 ~ 2024/6/12

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2013

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	N/A	Refer to Note 1 below
15.247(a)(2)	6 dB Bandwidth	N/A	Refer to Note 1 below
15.247(d)	Conducted Out of Band Emissions	N/A	Refer to Note 1 below
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -7.80 dB at 0.15000 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -2.6 dB at 146.30 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.3 dB at 2390.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is IPEX, MHF4, MHF4L not a standard connector.

Note:

- RF Output Power, AC Power Conducted Emissions and Unwanted Emissions test items were performed for this addendum. The others testing data refer to original test report and evaluated of the summary as following:
 - No changes are made to the module itself; this C2PC is for adding new sets of antennas.
 - The worst-case (max) antenna gain is still the same as original approved antennas, and only the antenna type is different. Therefore, for test items performed using conducted method / conducted method + max antenna gain, the original test results remain valid.
 - Conducted Output power was verified to be same as original filing.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.1 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	11be RTL8922AE Combo module
Brand	REALTEK
Test Model	RTL8922AE
Status of EUT	Engineering sample
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in VHT mode 1024QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11g: up to 54 Mbps 802.11n: up to 300 Mbps VHT: up to 400 Mbps 802.11ax: up to 573.5 Mbps 802.11be: up to 688.2 Mbps
Operating Frequency	2.412 GHz ~ 2.472 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20), 802.11be (EHT20): 13 802.11n (HT40), VHT40, 802.11ax (HE40), 802.11be (EHT40): 9
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone, 484-tone
Output Power	1Tx: 172.982 mW (22.38 dBm) 2Tx: CDD Mode: 348.42 mW (25.42 dBm) Beamforming Mode: 348.42 mW (25.42 dBm)

Note:

1. This report is prepared for FCC Class II permissive change. The difference compared with the Report No.: RFBBUI-WTW-P23070201 R1 design is as the following information:
 - ◆ Adding Dipole & Monopole antenna. (Refer to section 3.2)
2. According to above condition, therefore only the RF Output Power, AC Power Conducted Emission and Unwanted Emissions test items need to be performed. And all data were verified to meet the requirements.
3. There are Bluetooth and WLAN (2.4 GHz & 5 GHz & 6 GHz) technology used for the EUT.

4. Simultaneously transmission condition.

1Tx		
Condition	Technology	
	S0 (Chain 1)	S1 (Chain 0)
1	WLAN (5 GHz)_H	Bluetooth + WLAN (5 GHz)_L
2	WLAN (5 GHz)_L	Bluetooth + WLAN (5 GHz)_H
3	WLAN (5 GHz)_L	Bluetooth + WLAN (6 GHz)
4	WLAN (6 GHz)	Bluetooth + WLAN (5 GHz)_L
5	WLAN (6 GHz)	Bluetooth + WLAN (5 GHz)_H
6	WLAN (5 GHz)_H	Bluetooth + WLAN (6 GHz)
7	WLAN (2.4 GHz)	WLAN (5 GHz) Full
8	WLAN (2.4 GHz)	WLAN (6 GHz)
9	WLAN (5 GHz) Full	Bluetooth
10	WLAN (6 GHz)	Bluetooth
2TX		
1	WLAN (5 GHz)_L	WLAN (5 GHz)_L + Bluetooth
2	WLAN (5 GHz)_H	WLAN (5 GHz)_H + Bluetooth
3	WLAN (6 GHz)	WLAN (6 GHz) + Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

- The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.
- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Original

Ant. Set	RF Port No.	Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	1/2	Chain0/1	REALTEK	RTK-ANT-0022	3.4	2.4~2.4835	PIFA	IPEX, MHF4	300
					5	5.15~5.895			
					5	5.925~7.125			
2	1/2	Chain0/1	ARISTOTLE	RFA-57-JP805-4B-300	-1.87	5.15~5.895	PIFA	IPEX, MHF4	300
					-1.88	5.925~7.125			

Newly

3	1/2	Chain0/1	HongBo	260-25096	3.11	2.4~2.4835	Monopole	MHF4L	300
					4.91	5.15~5.895			
					4.73	5.925~7.125			
4	1/2	Chain0/1	ARISTOTLE	RFA-27-C38H1-MHF4300	3	2.4~2.4835	Dipole	IPEX, MHF4	300
					5	5.15~5.895			
					5	5.925~7.125			

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

2.4 GHz Band		
Modulation Mode	Tx & Rx Configuration	
802.11b	2Tx / 1Tx Diversity	2Rx
802.11g	2Tx / 1Tx Diversity	2Rx
802.11n (HT20)	2Tx / 1Tx Diversity	2Rx
802.11n (HT40)	2Tx / 1Tx Diversity	2Rx
VHT20	2Tx / 1Tx Diversity	2Rx
VHT40	2Tx / 1Tx Diversity	2Rx
802.11ax (HE20)	2Tx / 1Tx Diversity	2Rx
802.11ax (HE40)	2Tx / 1Tx Diversity	2Rx
802.11be (EHT20)	2Tx / 1Tx Diversity	2Rx
802.11be (EHT40)	2Tx / 1Tx Diversity	2Rx
802.11ax (RU26/52/106/242/484)	2Tx / 1Tx Diversity	2Rx
802.11be (RU26/52/106/242/484)	2Tx / 1Tx Diversity	2Rx

Note:

- All of modulation mode support beamforming function except 802.11b/g modulation mode.
- The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
- The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), VHT mode for 20 MHz (40 MHz), 802.11ax mode for 20 MHz (40 MHz) and 802.11be mode for 20 MHz (40 MHz) therefore the manufacturer will control the power for 802.11n/VHT/ax mode is same as the 802.11be mode or more lower than it and investigated worst case to representative mode in test report.

3.3 Channel List

13 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz	12	2467 MHz
6	2437 MHz	13	2472 MHz
7	2442 MHz		

9 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	8	2447 MHz
4	2427 MHz	9	2452 MHz
5	2432 MHz	10	2457 MHz
6	2437 MHz	11	2462 MHz
7	2442 MHz		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. The Monopole / Dipole antenna can be used in the following ways: X / Y / Z axis. Pre-scan in these ways and find the worst case as a representative test condition. 2. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.
Worst Case:	1. The monopole antenna the worst case was found when positioned on (X / Y / Z axis): X axis 2. The Dipole antenna the worst case was found when positioned on (X / Y / Z axis): Z axis

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Transmitter Configuration	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU Index
RF Output Power	-	802.11b	1Tx / 2Tx	SISO/ CDD	1, 6, 11, 12, 13	DBPSK	1Mb/s	NA
		802.11g			1, 6, 11, 12, 13	BPSK	6Mb/s	NA
		802.11be (EHT20)		SISO/ CDD & TxBF	1, 6, 11, 12, 13	BPSK	MCS0	NA
		802.11be (EHT40)			3, 6, 9, 10, 11	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU			1, 6, 11, 12, 13	BPSK	MCS0	8, 4, 8, 0, 8
		802.11be (EHT20) 52-tone RU			1, 6, 11, 12, 13	BPSK	MCS0	40, 38, 40, 39, 40
		802.11be (EHT20) 106-tone RU			1, 6, 11, 12, 13	BPSK	MCS0	53, 53, 54, 54, 54
AC Power Conducted Emissions	A, B	802.11be (EHT20)	2Tx	CDD	6	BPSK	MCS0	NA
Unwanted Emissions below 1 GHz	A, B	802.11be (EHT20)	1Tx / 2Tx	SISO/ CDD	6	BPSK	MCS0	NA

Test Item	EUT Configure Mode	Mode	Transmitter Configuration	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU Index
Unwanted Emissions above 1 GHz	A, B	802.11b	1Tx / 2Tx	SISO/ CDD	1, 6, 11, 12, 13	DBPSK	1Mb/s	NA
		802.11g			1, 6, 11, 12, 13	BPSK	6Mb/s	NA
		802.11be (EHT20)			1, 6, 11, 12, 13	BPSK	MCS0	NA
		802.11be (EHT40)			3, 6, 9, 10, 11	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU			1, 6, 11, 12, 13	BPSK	MCS0	8, 4, 8, 0, 8
		802.11be (EHT20) 52-tone RU			1, 6, 11, 12, 13	BPSK	MCS0	40, 38, 40, 39, 40
		802.11be (EHT20) 106-tone RU			1, 6, 11, 12, 13	BPSK	MCS0	53, 53, 54, 54, 54
EUT Configure Mode:	A	Monopole Antenna						
	B	Dipole Antenna						
Note: Channel puncturing and bandwidth reduction mechanisms are not supported.								
In the original report:								
1. For 1Tx diversity configuration the worst chain is: Chain 0 (S1)								
2. The worst case occurs in 20MHz bandwidth(RU 26/52/106).								

3.5 Duty Cycle of Test Signal

802.11b: Duty cycle = $0.993 \text{ ms} / 1.001 \text{ ms} \times 100\% = 99.2\%$

802.11g: Duty cycle = $0.963 \text{ ms} / 0.969 \text{ ms} \times 100\% = 99.4\%$


802.11be (EHT20): Duty cycle = $0.957 \text{ ms} / 0.965 \text{ ms} \times 100\% = 99.2\%$

802.11be (EHT40): Duty cycle = $0.953 \text{ ms} / 0.961 \text{ ms} \times 100\% = 99.2\%$


802.11be (EHT20) 26-tone RU: Duty cycle = $1.801 \text{ ms} / 1.808 \text{ ms} \times 100\% = 99.6\%$

802.11be (EHT20) 52-tone RU: Duty cycle = $1.796 \text{ ms} / 1.804 \text{ ms} \times 100\% = 99.6\%$

802.11be (EHT20) 106-tone RU: Duty cycle = $0.953 \text{ ms} / 0.961 \text{ ms} \times 100\% = 99.2\%$

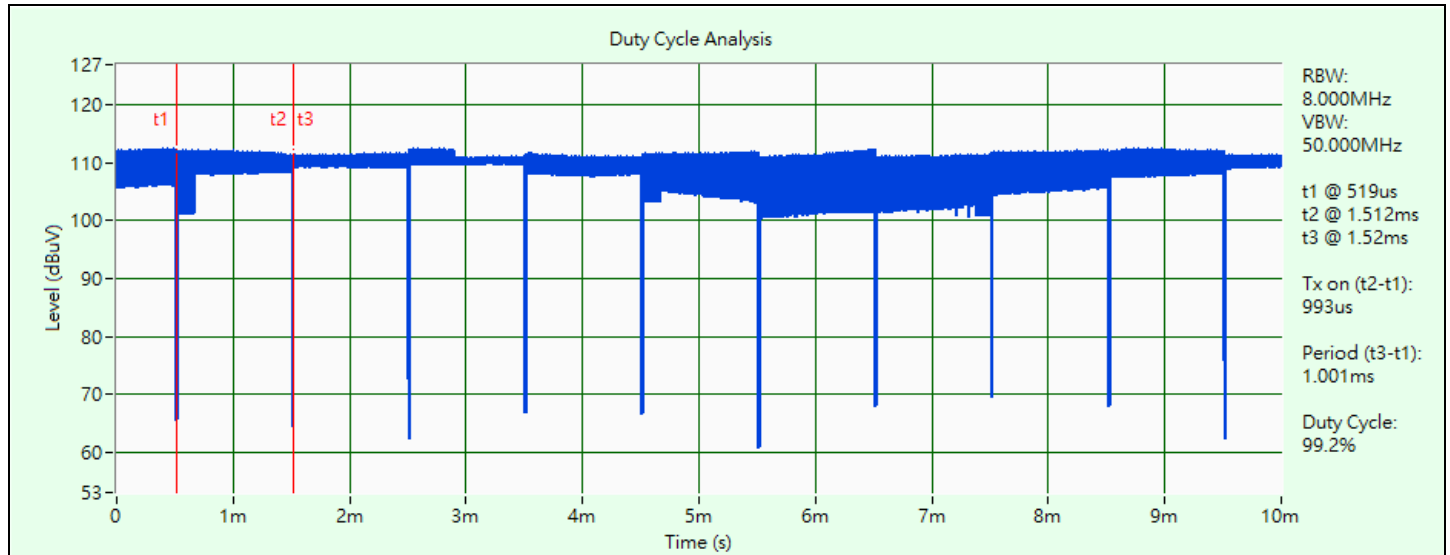


802.11b

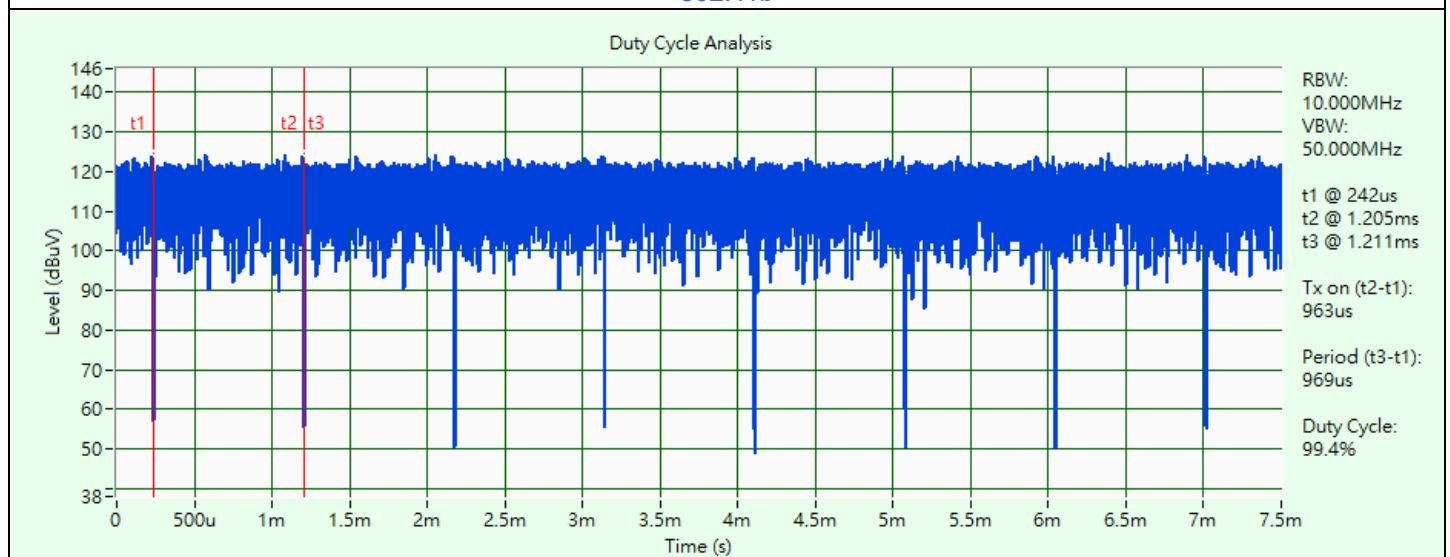


802.11g

Duty Cycle Analysis

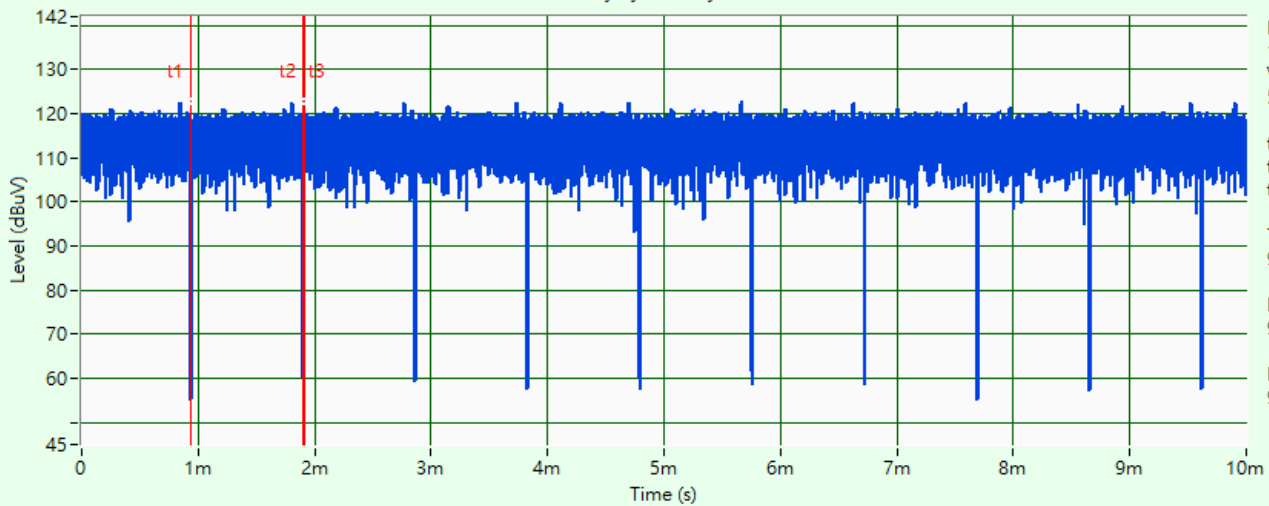


802.11be (EHT20)

Duty Cycle Analysis

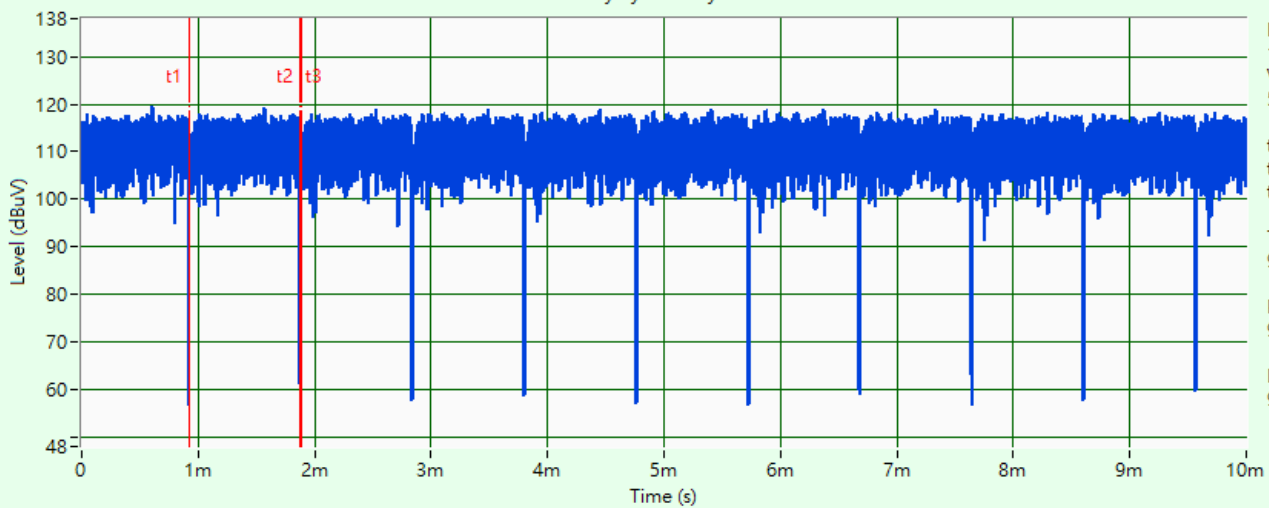


802.11be (EHT40)


Duty Cycle Analysis

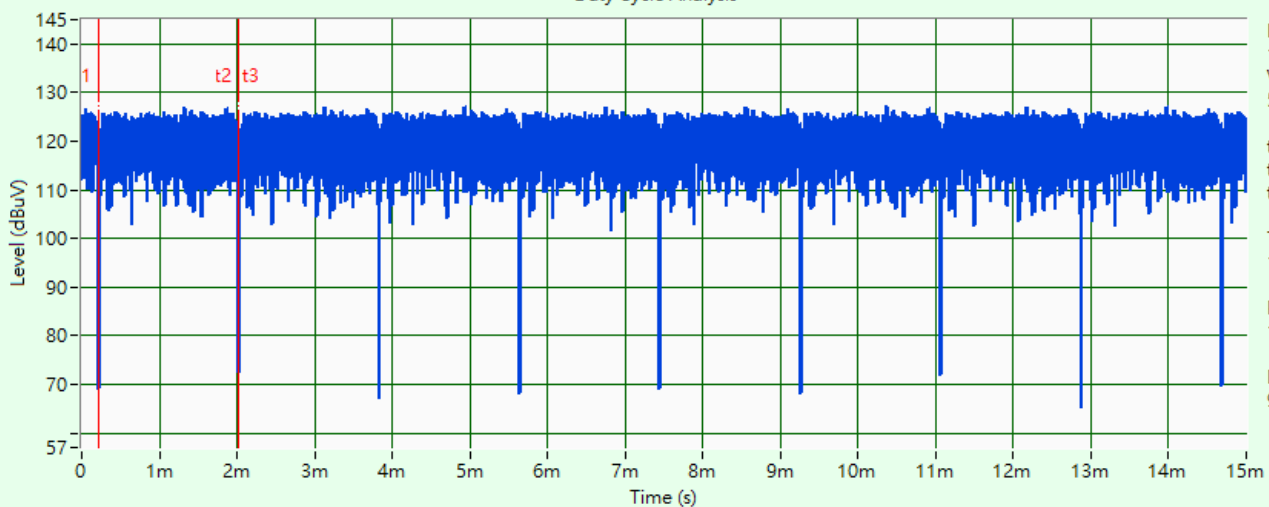

802.11be (EHT20) 26-tone RU

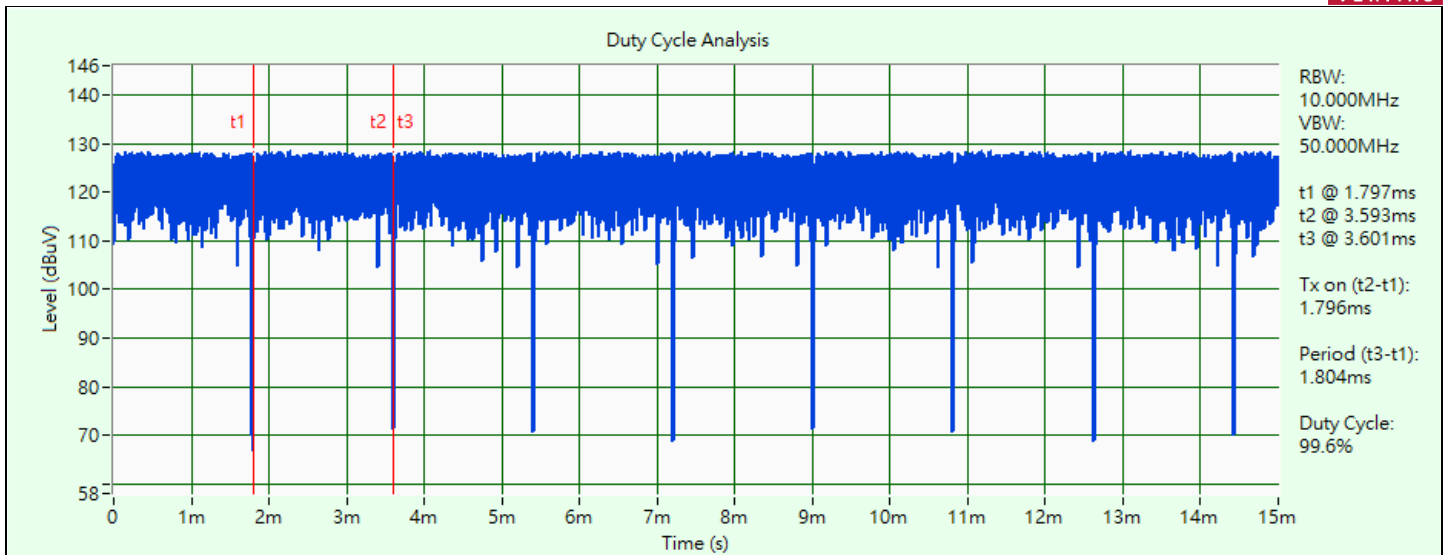

802.11be (EHT20) 52-tone RU

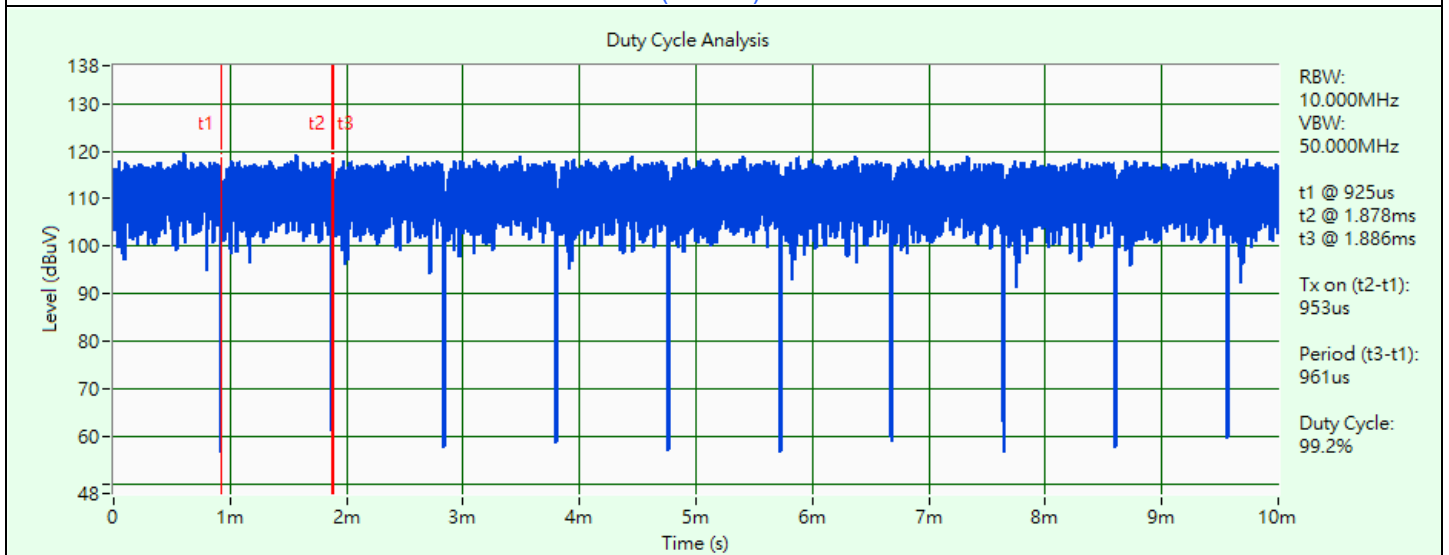


802.11be (EHT20) 106-tone RU

3.6 Test Program Used and Operation Descriptions


Controlling software (RTL8922A_PCIE_MP_Package_v2.0.22(120522)) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

Mode A

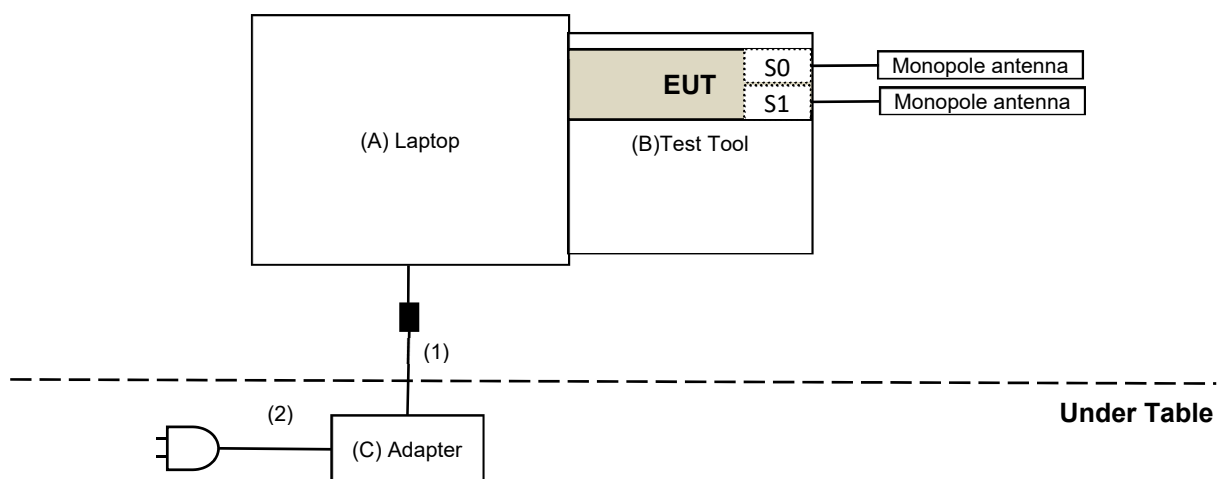

Mode B

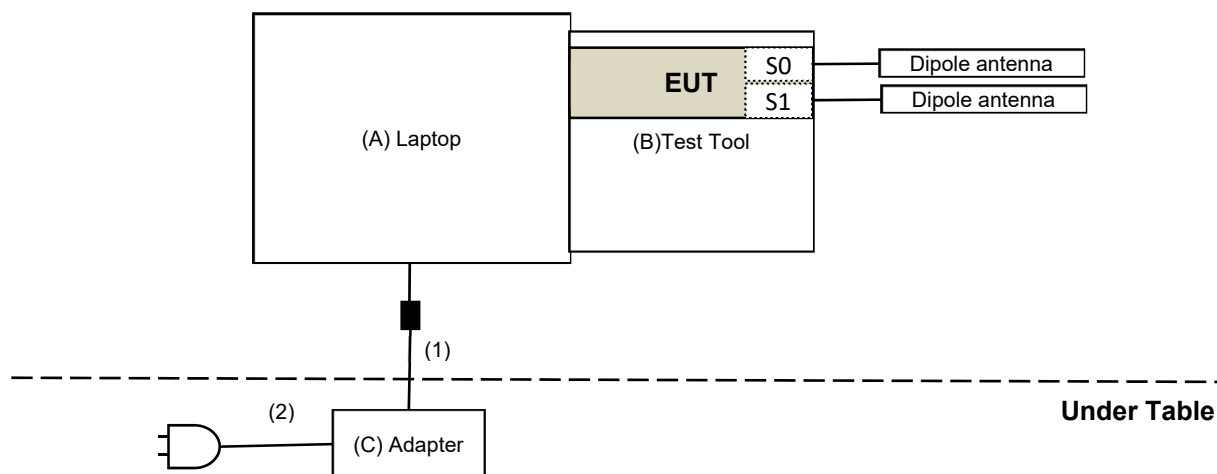

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Dell	E5420	FHNS4S1	N/A	Provided by Lab
B	Test Tool	Realtek	N/A	N/A	N/A	Supplied by applicant
C	Adapter	Dell	LA65NS1-00	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.8	No	1	Provided by Lab
2	AC Cable	1	1	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Pulse Power Sensor Anritsu	MA2411B	1726434	2023/6/19	2024/6/18
RF Power Meter Anritsu	ML2495A	1529002	2023/6/17	2024/6/16

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2024/4/1 ~ 2024/4/3

4.2 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance Telegartner	50 ohm	3	2023/10/20	2024/10/19
EMI Test Receiver R&S	ESCS 30	847124/029	2023/10/18	2024/10/17
Fixed Attenuator STI	STI02-2200-10	005	2024/2/19	2025/2/18
LISN R&S	ESH3-Z5	835239/001	2023/4/6	2024/4/5
		848773/004	2023/10/13	2024/10/12
RF Coaxial Cable JYEBAO	5D-FB	COCCAB-001	2024/2/19	2025/2/18
Software BVADT	BVADT_Conc_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2024/2/22 ~ 2024/2/23

4.3 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-0842	2023/10/12	2024/10/11
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
EMI Test Receiver R&S	ESR7	102026	2024/3/25	2025/3/24
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	2024/3/30	2025/3/29
Loop Antenna Electro-Metrics	EM-6879	264	2024/2/23	2025/2/22
Preamplifier EMCI	EMC330N	980538	2024/3/30	2025/3/29
	EMC001340	980142	2024/2/19	2025/2/18
PXA Signal Analyzer Keysight	N9030B	MY57141948	2023/5/19	2024/5/18
RF Coaxial Cable JYEBAO	5D-FB	LOOPCAB-001	2024/2/19	2025/2/18
		LOOPCAB-002	2024/2/19	2025/2/18
RF Coaxial Cable PEWC	8D	966-5-1	2024/3/30	2025/3/29
		966-5-2	2024/3/30	2025/3/29
		966-5-3	2024/3/30	2025/3/29
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2024/4/1

4.4 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
EMI Test Receiver R&S	ESR7	102026	2024/3/25	2025/3/24
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1819	2023/11/12	2024/11/11
	BBHA 9170	9170-739	2023/11/12	2024/11/11
Preamplifier EMCI	EMC12630SE	980509	2024/1/29	2025/1/28
	EMC184045SE	980387	2023/8/9	2024/8/8
PXA Signal Analyzer Keysight	N9030B	MY57141948	2024/5/20	2025/5/19
RF Coaxial Cable EMCI	EMC102-KM-KM-1200	160924	2024/1/29	2025/1/28
	EMC102-KM-KM-4000	200214	2024/1/29	2025/1/28
	EMC104-SM-SM-1500	180503	2024/3/16	2025/3/15
	EMC104-SM-SM-2000	180501	2024/3/16	2025/3/15
	EMC104-SM-SM-6000	180506	2024/3/16	2025/3/15
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2024/5/31 ~ 2024/6/12

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.3 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).

5.4 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup

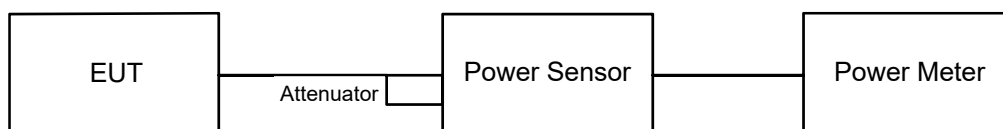


6.1.2 Test Procedure

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 AC Power Conducted Emissions

6.2.1 Test Setup

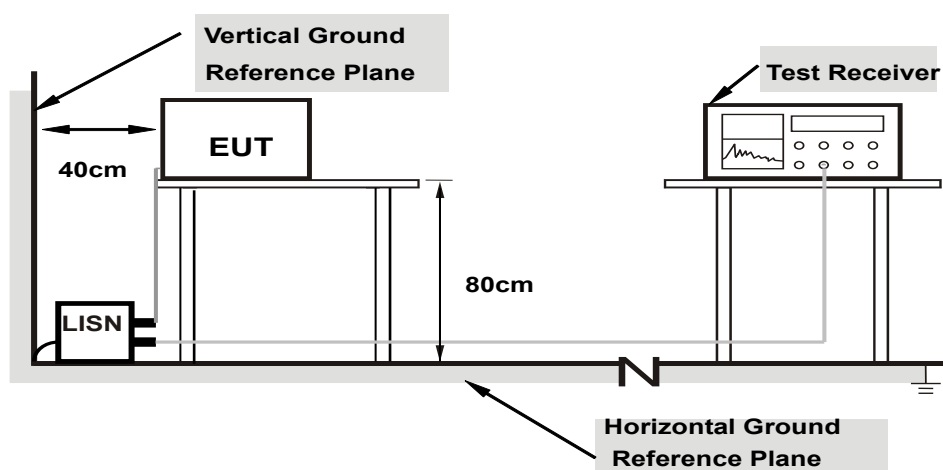

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.2.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.3 Unwanted Emissions below 1 GHz

6.3.1 Test Setup

For Radiated emission below 30 MHz

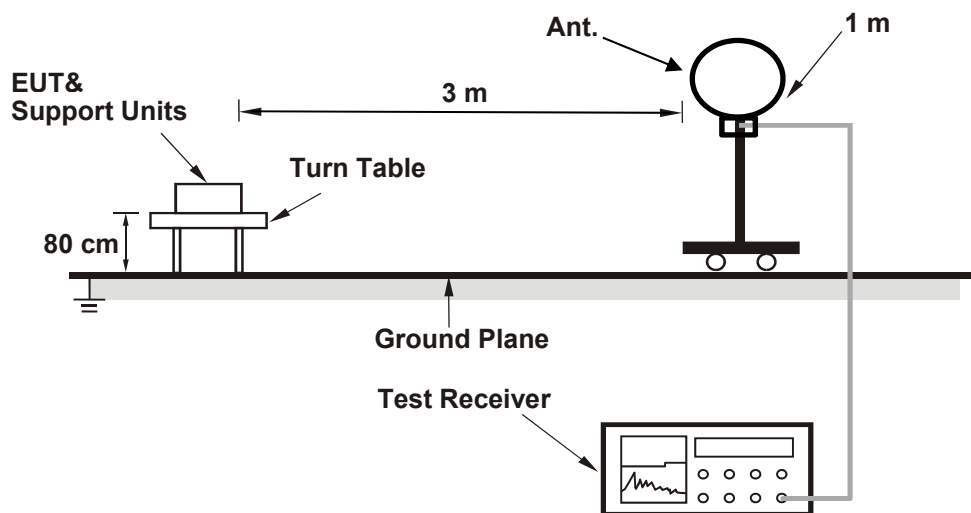

For Radiated emission above 30 MHz

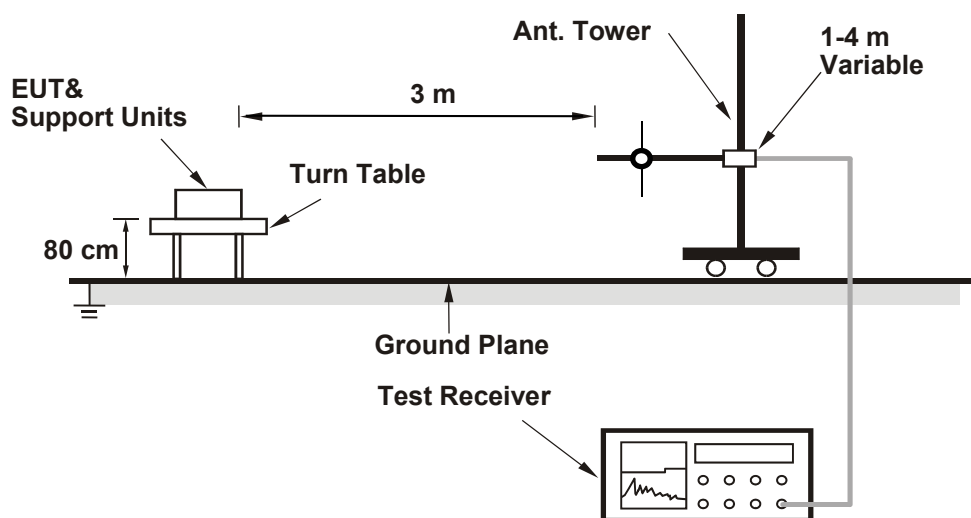

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.4 Unwanted Emissions above 1 GHz

6.4.1 Test Setup

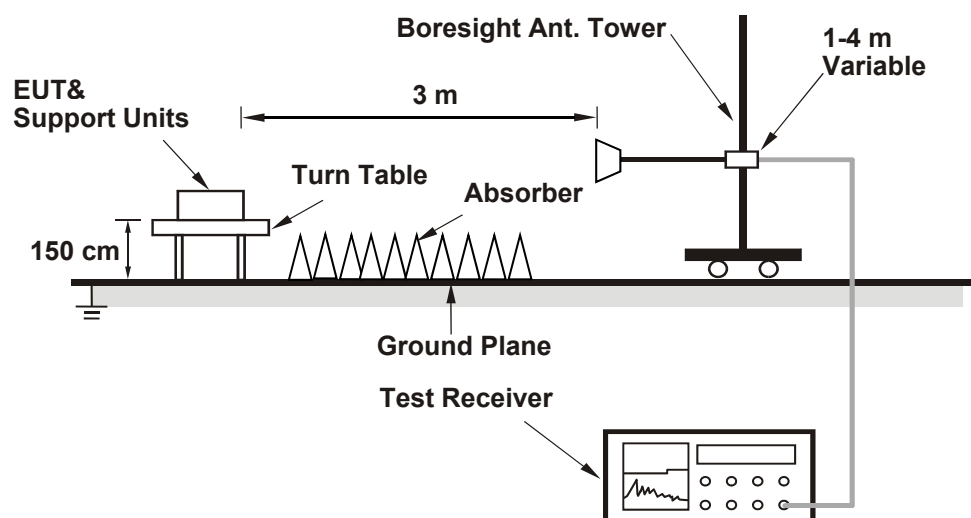

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.4.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	22°C, 57% RH	Tested By:	John Peng
--------------	---------	---------------------------	--------------	------------	-----------

For 1Tx

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	94.842	19.77	30	Pass
6	2437	169.044	22.28	30	Pass
11	2462	75.858	18.80	30	Pass
12	2467	27.04	14.32	30	Pass
13	2472	13.836	11.41	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	87.498	19.42	30	Pass
6	2437	167.88	22.25	30	Pass
11	2462	76.384	18.83	30	Pass
12	2467	67.453	18.29	30	Pass
13	2472	53.703	17.30	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	67.92	18.32	30	Pass
6	2437	172.584	22.37	30	Pass
11	2462	63.096	18.00	30	Pass
12	2467	50.119	17.00	30	Pass
13	2472	50.119	17.00	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
3	2422	62.806	17.98	30	Pass
6	2437	138.357	21.41	30	Pass
9	2452	64.121	18.07	30	Pass
10	2457	53.333	17.27	30	Pass
11	2462	54.954	17.40	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	90.782	19.58	30	Pass
6	2437	171.791	22.35	30	Pass
11	2462	105.925	20.25	30	Pass
12	2467	92.257	19.65	30	Pass
13	2472	23.014	13.62	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	59.156	17.72	30	Pass
6	2437	172.982	22.38	30	Pass
11	2462	92.683	19.67	30	Pass
12	2467	90.782	19.58	30	Pass
13	2472	36.813	15.66	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	63.973	18.06	30	Pass
6	2437	172.187	22.36	30	Pass
11	2462	64.863	18.12	30	Pass
12	2467	58.345	17.66	30	Pass
13	2472	47.098	16.73	30	Pass

Note: The antenna gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

Input Power:	3.3 Vdc	Environmental Conditions:	22°C, 57% RH	Tested By:	John Peng
--------------	---------	---------------------------	--------------	------------	-----------

For 2Tx

802.11b CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	18.03	18.07	127.654	21.06	30	Pass
6	2437	22.32	22.43	345.593	25.39	30	Pass
11	2462	17.44	17.35	109.788	20.41	30	Pass
12	2467	12.11	12.15	32.661	15.14	30	Pass
13	2472	8.30	8.42	13.711	11.37	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11g CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	17.29	17.43	108.915	20.37	30	Pass
6	2437	22.33	22.42	345.584	25.39	30	Pass
11	2462	17.38	17.55	111.587	20.48	30	Pass
12	2467	17.25	17.34	107.289	20.31	30	Pass
13	2472	16.26	16.35	85.419	19.32	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	17.35	17.48	110.301	20.43	30	Pass
6	2437	22.37	22.45	348.376	25.42	30	Pass
11	2462	16.79	16.97	97.527	19.89	30	Pass
12	2467	16.31	16.47	87.117	19.40	30	Pass
13	2472	16.43	16.31	86.71	19.38	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	15.98	15.73	77.039	18.87	30	Pass
6	2437	17.30	17.41	108.784	20.37	30	Pass
9	2452	15.93	16.06	79.539	19.01	30	Pass
10	2457	15.34	15.38	68.712	18.37	30	Pass
11	2462	15.43	15.42	69.748	18.44	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 26-tone RU CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	17.61	17.75	117.243	20.69	30	Pass
6	2437	22.33	22.49	348.42	25.42	30	Pass
11	2462	17.97	18.11	127.376	21.05	30	Pass
12	2467	16.65	16.71	93.119	19.69	30	Pass
13	2472	13.10	13.25	41.552	16.19	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 52-tone RU CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	16.67	16.64	92.583	19.67	30	Pass
6	2437	22.34	22.39	344.776	25.38	30	Pass
11	2462	17.55	17.58	114.165	20.58	30	Pass
12	2467	16.13	16.15	82.23	19.15	30	Pass
13	2472	13.56	13.72	46.249	16.65	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 106-tone RU CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	17.37	17.54	111.33	20.47	30	Pass
6	2437	22.28	22.31	339.26	25.31	30	Pass
11	2462	16.61	16.68	92.373	19.66	30	Pass
12	2467	14.92	15.17	63.931	18.06	30	Pass
13	2472	14.62	14.65	58.148	17.65	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	17.35	17.48	110.301	20.43	29.59	Pass
6	2437	22.37	22.45	348.376	25.42	29.59	Pass
11	2462	16.79	16.97	97.527	19.89	29.59	Pass
12	2467	16.31	16.47	87.117	19.40	29.59	Pass
13	2472	16.43	16.31	86.71	19.38	29.59	Pass

Notes:

1. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
2. The directional gain is 6.41 dBi > 6 dBi, so the output power limit shall be reduced to 30-(6.41-6) = 29.59 dBm.

802.11be (EHT40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	15.98	15.73	77.039	18.87	29.59	Pass
6	2437	17.30	17.41	108.784	20.37	29.59	Pass
9	2452	15.93	16.06	79.539	19.01	29.59	Pass
10	2457	15.34	15.38	68.712	18.37	29.59	Pass
11	2462	15.43	15.42	69.748	18.44	29.59	Pass

Notes:

1. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
2. The directional gain is 6.41 dBi > 6 dBi, so the output power limit shall be reduced to 30-(6.41-6) = 29.59 dBm.

802.11be (EHT20) 26-tone RU Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	17.61	17.75	117.243	20.69	29.59	Pass
6	2437	22.33	22.49	348.42	25.42	29.59	Pass
11	2462	17.97	18.11	127.376	21.05	29.59	Pass
12	2467	16.65	16.71	93.119	19.69	29.59	Pass
13	2472	13.10	13.25	41.552	16.19	29.59	Pass

Notes:

1. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
2. The directional gain is 6.41 dBi > 6 dBi, so the output power limit shall be reduced to $30-(6.41-6) = 29.59$ dBm.

802.11be (EHT20) 52-tone RU Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	16.67	16.64	92.583	19.67	29.59	Pass
6	2437	22.34	22.39	344.776	25.38	29.59	Pass
11	2462	17.55	17.58	114.165	20.58	29.59	Pass
12	2467	16.13	16.15	82.23	19.15	29.59	Pass
13	2472	13.56	13.72	46.249	16.65	29.59	Pass

Notes:

1. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
2. The directional gain is 6.41 dBi > 6 dBi, so the output power limit shall be reduced to $30-(6.41-6) = 29.59$ dBm.

802.11be (EHT20) 106-tone RU Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	17.37	17.54	111.33	20.47	29.59	Pass
6	2437	22.28	22.31	339.26	25.31	29.59	Pass
11	2462	16.61	16.68	92.373	19.66	29.59	Pass
12	2467	14.92	15.17	63.931	18.06	29.59	Pass
13	2472	14.62	14.65	58.148	17.65	29.59	Pass

Notes:

1. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
2. The directional gain is 6.41 dBi > 6 dBi, so the output power limit shall be reduced to $30-(6.41-6) = 29.59$ dBm.

7.2 AC Power Conducted Emissions

Mode A

2Tx

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.93	42.54	17.41	52.47	27.34	66.00	56.00	-13.53	-28.66
2	0.17734	9.94	39.68	16.32	49.62	26.26	64.61	54.61	-14.99	-28.35
3	0.21641	9.94	34.63	15.07	44.57	25.01	62.96	52.96	-18.39	-27.95
4	0.38828	9.95	20.09	7.45	30.04	17.40	58.10	48.10	-28.06	-30.70
5	3.54688	10.16	25.42	17.66	35.58	27.82	56.00	46.00	-20.42	-18.18
6	22.95703	11.43	21.46	16.27	32.89	27.70	60.00	50.00	-27.11	-22.30

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value



RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 69% RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.02	48.18	33.28	58.20	43.30	66.00	56.00	-7.80	-12.70
2	0.17734	10.01	38.82	15.45	48.83	25.46	64.61	54.61	-15.78	-29.15
3	0.25547	10.01	28.89	10.15	38.90	20.16	61.58	51.58	-22.68	-31.42
4	0.38828	10.02	19.99	7.73	30.01	17.75	58.10	48.10	-28.09	-30.35
5	3.73047	10.19	24.75	17.18	34.94	27.37	56.00	46.00	-21.06	-18.63
6	16.08984	10.89	16.34	8.32	27.23	19.21	60.00	50.00	-32.77	-30.79

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value



Mode B


2Tx

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.95	47.74	31.58	57.69	41.53	66.00	56.00	-8.31	-14.47
2	0.18516	9.94	39.91	16.61	49.85	26.55	64.25	54.25	-14.40	-27.70
3	0.52891	9.96	20.30	9.32	30.26	19.28	56.00	46.00	-25.74	-26.72
4	3.32813	10.13	23.80	16.36	33.93	26.49	56.00	46.00	-22.07	-19.51
5	15.95313	11.06	15.70	5.34	26.76	16.40	60.00	50.00	-33.24	-33.60
6	24.32813	11.49	20.82	15.30	32.31	26.79	60.00	50.00	-27.69	-23.21

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

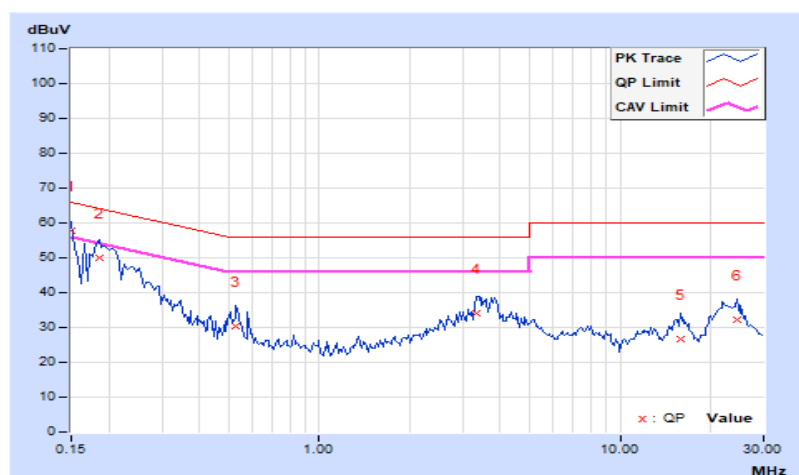


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	10.01	39.00	15.13	49.01	25.14	64.61	54.61	-15.60	-29.47
2	0.29063	10.01	28.88	14.64	38.89	24.65	60.51	50.51	-21.62	-25.86
3	0.36484	10.02	18.84	4.70	28.86	14.72	58.62	48.62	-29.76	-33.90
4	3.63281	10.18	24.89	17.34	35.07	27.52	56.00	46.00	-20.93	-18.48
5	14.76953	10.82	15.65	7.23	26.47	18.05	60.00	50.00	-33.53	-31.95
6	24.19922	11.14	14.98	9.69	26.12	20.83	60.00	50.00	-33.88	-29.17

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

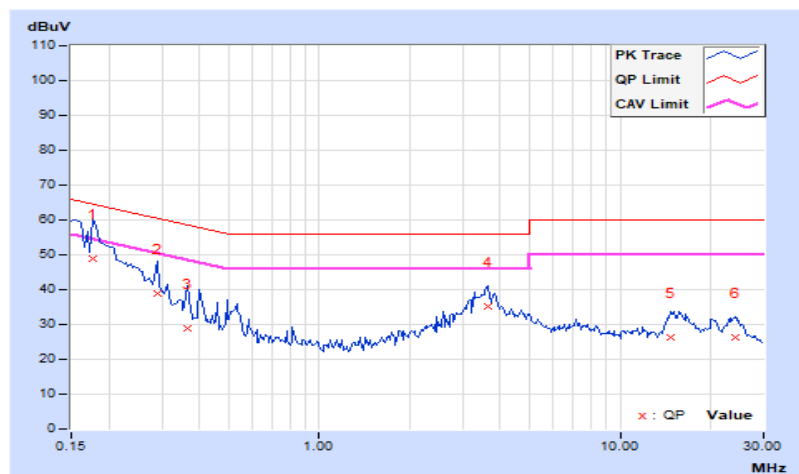

7.3 Unwanted Emissions below 1 GHz

Mode A


1Tx

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	97.60	37.8 QP	43.5	-5.7	1.99 H	214	55.3	-17.5
2	146.80	40.0 QP	43.5	-3.5	1.00 H	349	52.2	-12.2
3	298.00	40.3 QP	46.0	-5.7	2.11 H	38	52.2	-11.9
4	669.50	41.2 QP	46.0	-4.8	1.52 H	126	44.8	-3.6
5	702.60	36.6 QP	46.0	-9.4	2.99 H	213	39.5	-2.9
6	773.00	36.7 QP	46.0	-9.3	2.91 H	242	38.2	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

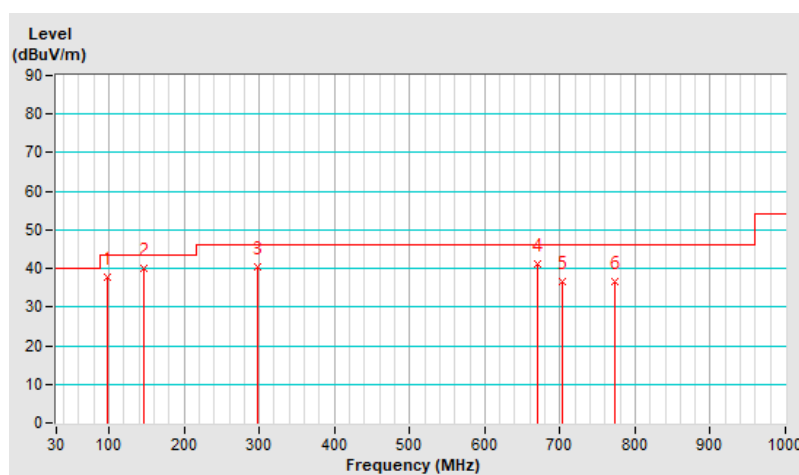


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	100.10	33.2 QP	43.5	-10.3	1.55 V	117	50.3	-17.1
2	175.30	31.7 QP	43.5	-11.8	3.08 V	160	45.1	-13.4
3	298.40	35.1 QP	46.0	-10.9	2.96 V	336	47.0	-11.9
4	429.50	29.1 QP	46.0	-16.9	3.15 V	266	37.5	-8.4
5	574.30	29.3 QP	46.0	-16.7	2.59 V	333	34.8	-5.5
6	666.20	36.9 QP	46.0	-9.1	3.08 V	307	40.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

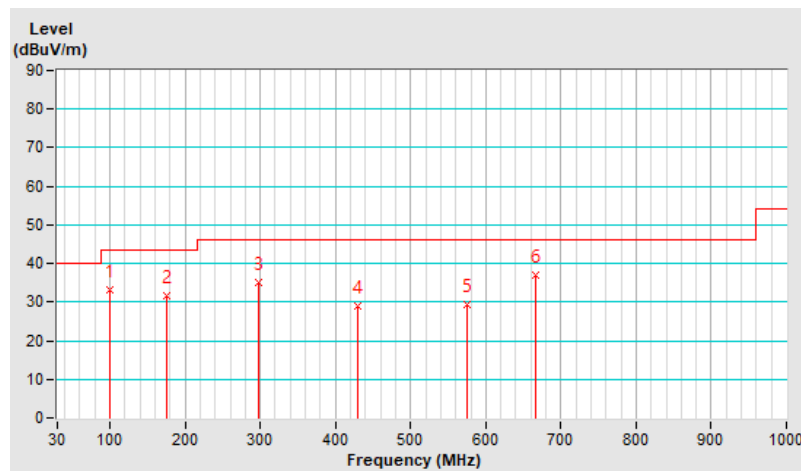


2Tx

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	100.40	37.0 QP	43.5	-6.5	1.98 H	211	54.0	-17.0
2	146.30	40.9 QP	43.5	-2.6	2.53 H	331	53.2	-12.3
3	298.60	38.6 QP	46.0	-7.4	2.98 H	84	50.5	-11.9
4	663.90	40.5 QP	46.0	-5.5	2.48 H	173	44.1	-3.6
5	702.30	37.0 QP	46.0	-9.0	1.34 H	195	39.9	-2.9
6	769.40	37.1 QP	46.0	-8.9	1.07 H	217	38.6	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

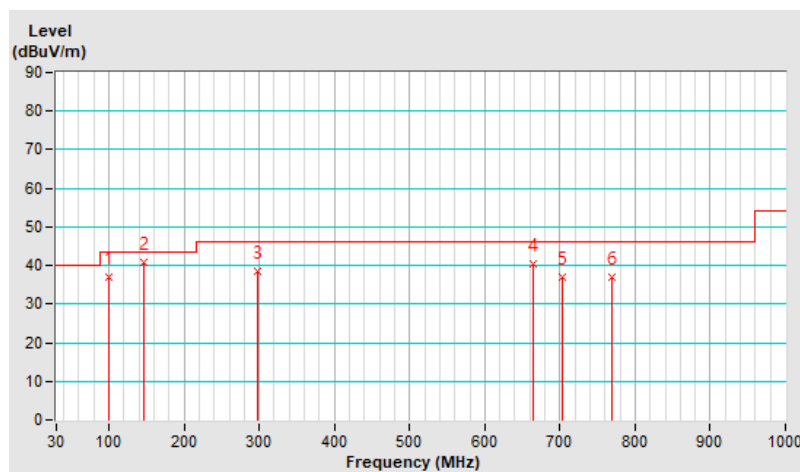


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	102.60	32.3 QP	43.5	-11.2	1.96 V	140	49.0	-16.7
2	176.60	30.6 QP	43.5	-12.9	2.59 V	100	44.1	-13.5
3	296.80	34.6 QP	46.0	-11.4	1.09 V	312	46.5	-11.9
4	432.20	29.2 QP	46.0	-16.8	1.58 V	253	37.5	-8.3
5	572.80	29.7 QP	46.0	-16.3	2.10 V	353	35.1	-5.4
6	665.90	37.1 QP	46.0	-8.9	1.44 V	310	40.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

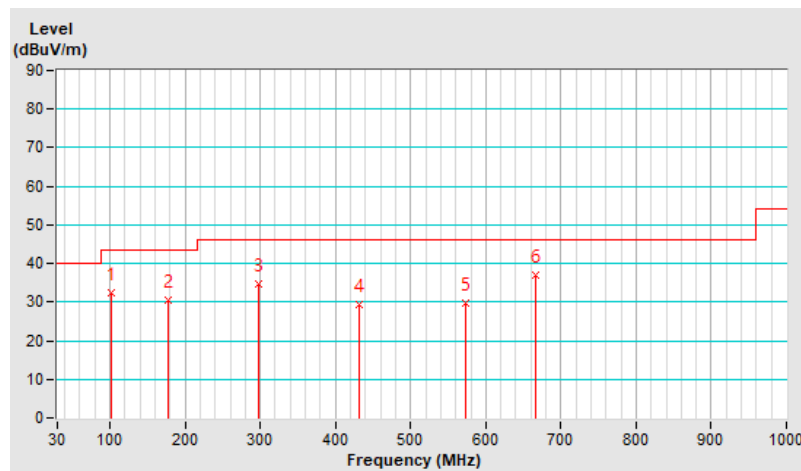

Mode B


1Tx

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	97.70	37.8 QP	43.5	-5.7	2.18 H	218	55.3	-17.5
2	146.40	39.5 QP	43.5	-4.0	1.00 H	299	51.8	-12.3
3	298.10	40.8 QP	46.0	-5.2	1.83 H	79	52.7	-11.9
4	668.00	39.6 QP	46.0	-6.4	1.39 H	88	43.2	-3.6
5	702.40	36.8 QP	46.0	-9.2	3.13 H	255	39.7	-2.9
6	771.00	35.4 QP	46.0	-10.6	2.98 H	211	36.9	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

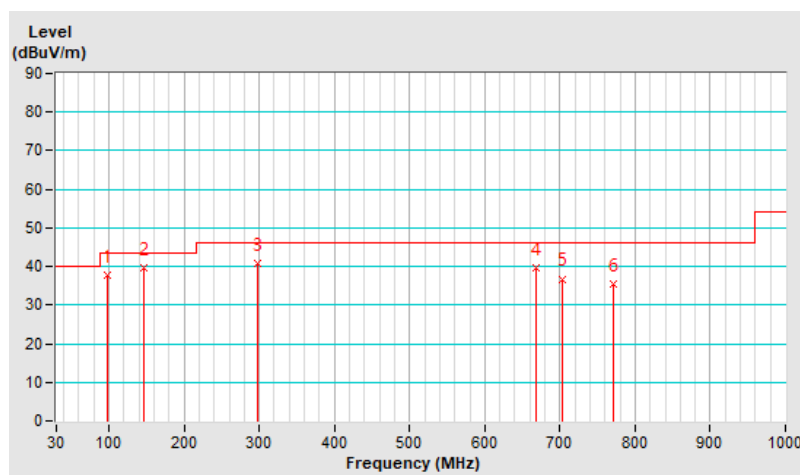


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.30	32.5 QP	43.5	-11.0	1.43 V	93	49.7	-17.2
2	175.20	31.8 QP	43.5	-11.7	3.00 V	182	45.1	-13.3
3	297.10	33.6 QP	46.0	-12.4	2.99 V	330	45.5	-11.9
4	429.30	28.2 QP	46.0	-17.8	3.14 V	230	36.6	-8.4
5	574.90	29.6 QP	46.0	-16.4	2.64 V	326	35.0	-5.4
6	668.20	37.9 QP	46.0	-8.1	2.99 V	284	41.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

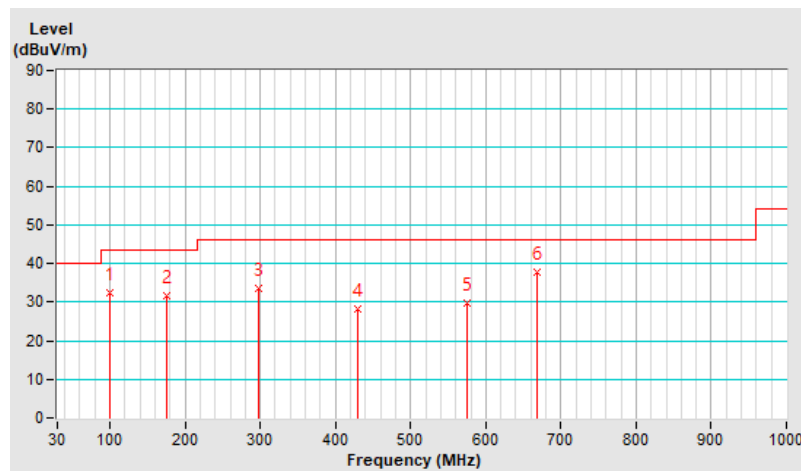


2Tx

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	101.30	36.8 QP	43.5	-6.7	1.97 H	217	53.7	-16.9
2	145.70	40.4 QP	43.5	-3.1	2.69 H	301	52.8	-12.4
3	297.40	38.5 QP	46.0	-7.5	3.02 H	106	50.4	-11.9
4	663.20	40.4 QP	46.0	-5.6	2.32 H	135	44.1	-3.7
5	702.10	36.8 QP	46.0	-9.2	1.48 H	197	39.7	-2.9
6	768.30	35.4 QP	46.0	-10.6	1.00 H	210	36.9	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

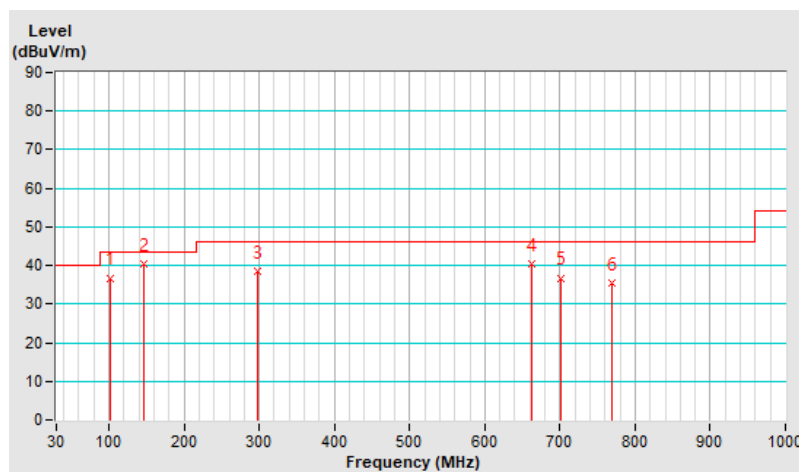


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	101.50	32.0 QP	43.5	-11.5	1.84 V	143	48.9	-16.9
2	176.80	31.7 QP	43.5	-11.8	2.52 V	112	45.3	-13.6
3	297.70	35.8 QP	46.0	-10.2	1.00 V	329	47.7	-11.9
4	434.20	30.0 QP	46.0	-16.0	1.43 V	228	38.2	-8.2
5	571.90	28.4 QP	46.0	-17.6	1.99 V	302	33.9	-5.5
6	666.40	37.8 QP	46.0	-8.2	1.42 V	305	41.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

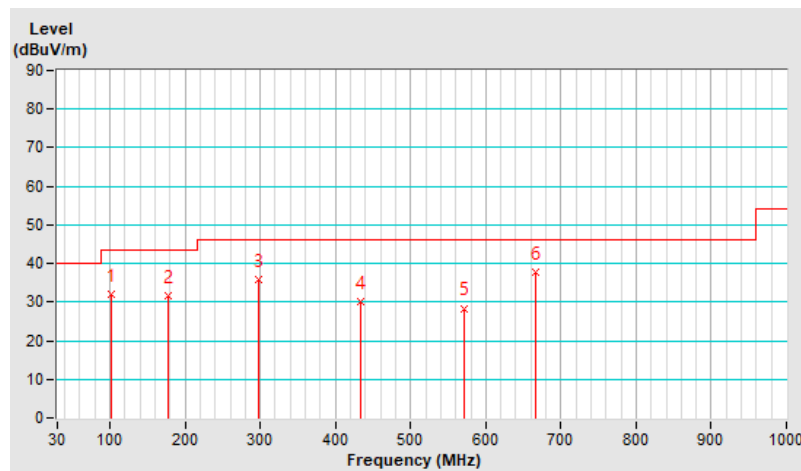

7.4 Unwanted Emissions above 1 GHz

Mode A


1Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	1.90 H	109	61.7	-3.6
2	2390.00	49.5 AV	54.0	-4.5	1.90 H	109	53.1	-3.6
3	*2412.00	104.7 PK			1.90 H	109	108.2	-3.5
4	*2412.00	102.2 AV			1.90 H	109	105.7	-3.5
5	4824.00	48.0 PK	74.0	-26.0	1.03 H	180	46.3	1.7
6	4824.00	46.1 AV	54.0	-7.9	1.03 H	180	44.4	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

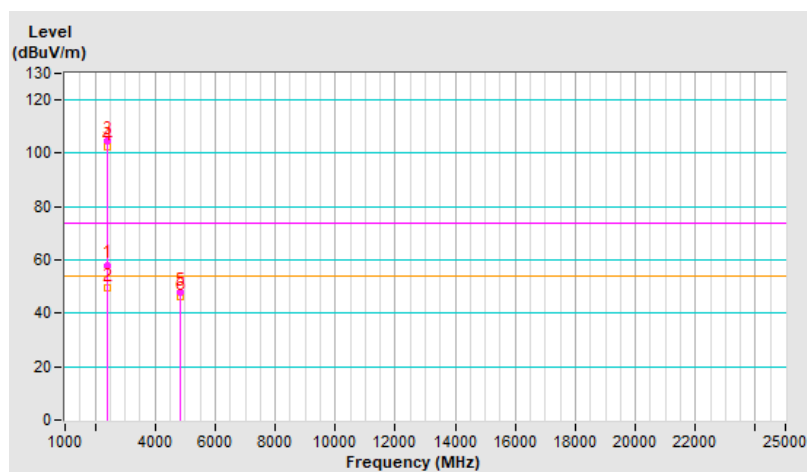


RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.4 PK	74.0	-17.6	2.65 V	217	60.0	-3.6
2	2390.00	47.9 AV	54.0	-6.1	2.65 V	217	51.5	-3.6
3	*2412.00	101.2 PK			2.65 V	217	104.7	-3.5
4	*2412.00	98.7 AV			2.65 V	217	102.2	-3.5
5	4824.00	45.3 PK	74.0	-28.7	1.00 V	210	43.6	1.7
6	4824.00	43.9 AV	54.0	-10.1	1.00 V	210	42.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

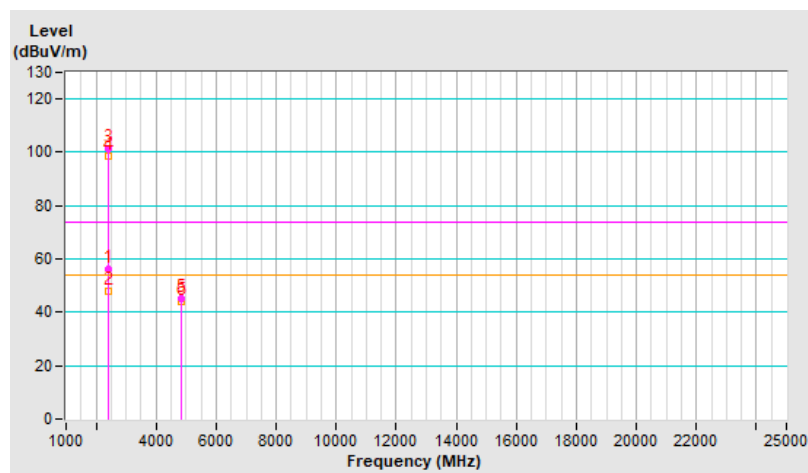


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.6 PK	74.0	-19.4	1.86 H	115	58.2	-3.6
2	2390.00	43.5 AV	54.0	-10.5	1.86 H	115	47.1	-3.6
3	*2437.00	107.5 PK			1.86 H	115	111.0	-3.5
4	*2437.00	104.5 AV			1.86 H	115	108.0	-3.5
5	2483.50	55.1 PK	74.0	-18.9	1.86 H	115	58.5	-3.4
6	2483.50	42.6 AV	54.0	-11.4	1.86 H	115	46.0	-3.4
7	4874.00	47.5 PK	74.0	-26.5	1.01 H	180	46.0	1.5
8	4874.00	45.9 AV	54.0	-8.1	1.01 H	180	44.4	1.5
9	7311.00	54.7 PK	74.0	-19.3	1.14 H	218	47.1	7.6
10	7311.00	50.8 AV	54.0	-3.2	1.14 H	218	43.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

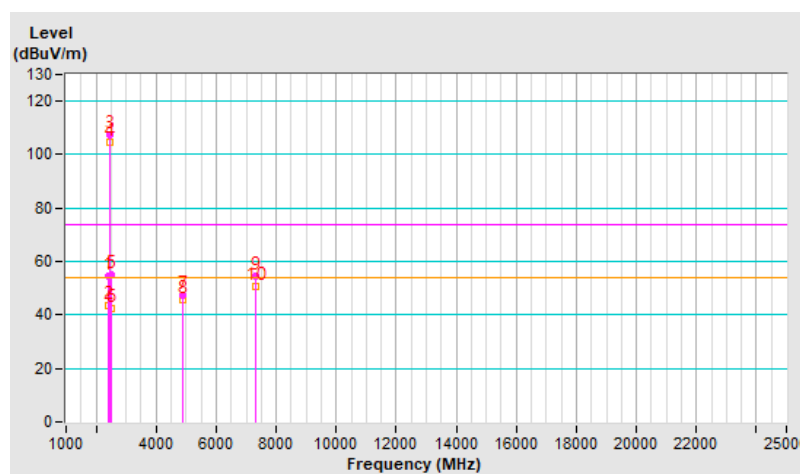


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	2.63 V	206	59.4	-3.6
2	2390.00	42.6 AV	54.0	-11.4	2.63 V	206	46.2	-3.6
3	*2437.00	104.3 PK			2.63 V	206	107.8	-3.5
4	*2437.00	102.1 AV			2.63 V	206	105.6	-3.5
5	2483.50	56.4 PK	74.0	-17.6	2.63 V	206	59.8	-3.4
6	2483.50	42.7 AV	54.0	-11.3	2.63 V	206	46.1	-3.4
7	4874.00	45.0 PK	74.0	-29.0	1.00 V	198	43.5	1.5
8	4874.00	43.4 AV	54.0	-10.6	1.00 V	198	41.9	1.5
9	7311.00	54.0 PK	74.0	-20.0	1.15 V	292	46.4	7.6
10	7311.00	50.0 AV	54.0	-4.0	1.15 V	292	42.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

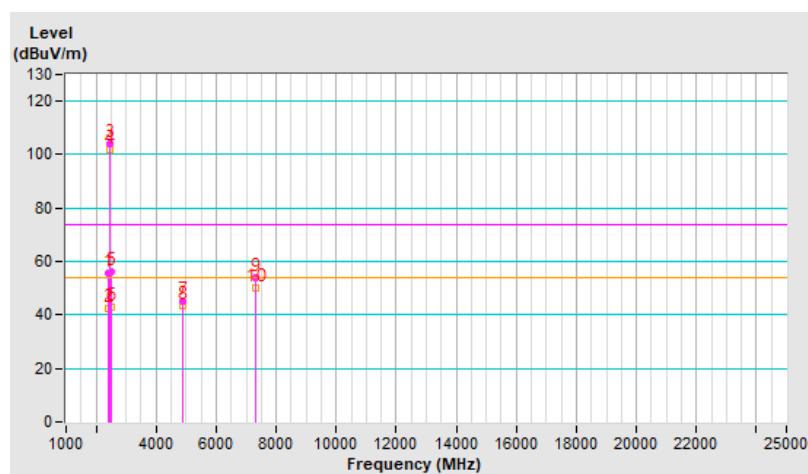


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.4 PK			1.92 H	123	106.9	-3.5
2	*2462.00	101.2 AV			1.92 H	123	104.7	-3.5
3	2483.50	58.1 PK	74.0	-15.9	1.92 H	123	61.5	-3.4
4	2483.50	49.6 AV	54.0	-4.4	1.92 H	123	53.0	-3.4
5	4924.00	47.1 PK	74.0	-26.9	1.00 H	196	45.5	1.6
6	4924.00	45.7 AV	54.0	-8.3	1.00 H	196	44.1	1.6
7	7386.00	54.0 PK	74.0	-20.0	1.09 H	220	46.1	7.9
8	7386.00	50.3 AV	54.0	-3.7	1.09 H	220	42.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

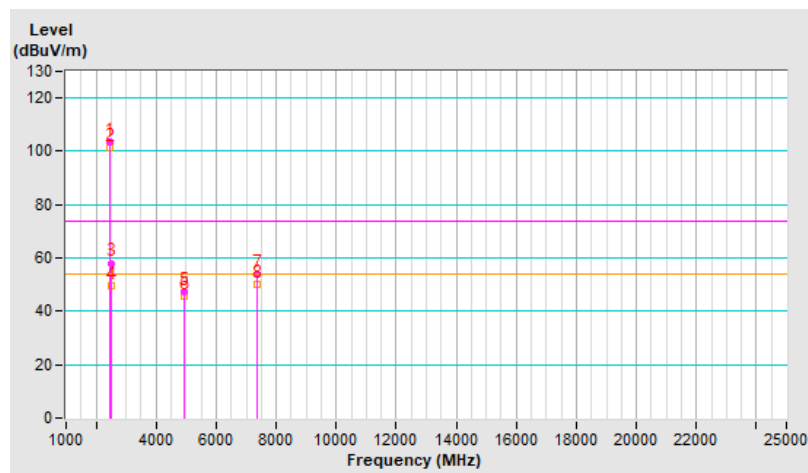


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.3 PK			2.70 V	211	103.8	-3.5
2	*2462.00	98.5 AV			2.70 V	211	102.0	-3.5
3	2483.50	58.1 PK	74.0	-15.9	2.70 V	211	61.5	-3.4
4	2483.50	48.3 AV	54.0	-5.7	2.70 V	211	51.7	-3.4
5	4924.00	45.9 PK	74.0	-28.1	1.00 V	189	44.3	1.6
6	4924.00	44.0 AV	54.0	-10.0	1.00 V	189	42.4	1.6
7	7386.00	54.2 PK	74.0	-19.8	1.22 V	291	46.3	7.9
8	7386.00	50.2 AV	54.0	-3.8	1.22 V	291	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

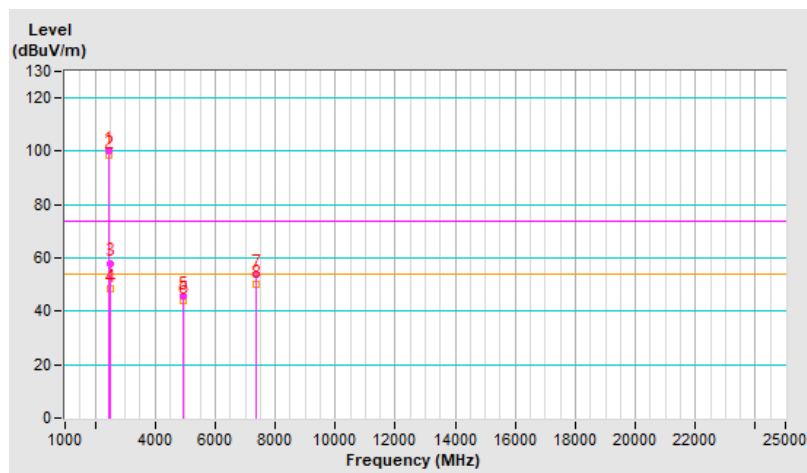


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	98.7 PK			1.88 H	116	102.1	-3.4
2	*2467.00	96.2 AV			1.88 H	116	99.6	-3.4
3	2483.50	58.4 PK	74.0	-15.6	1.88 H	116	61.8	-3.4
4	2483.50	50.4 AV	54.0	-3.6	1.88 H	116	53.8	-3.4
5	4934.00	47.6 PK	74.0	-26.4	1.02 H	194	46.0	1.6
6	4934.00	46.1 AV	54.0	-7.9	1.02 H	194	44.5	1.6
7	7401.00	54.3 PK	74.0	-19.7	1.17 H	232	46.4	7.9
8	7401.00	50.4 AV	54.0	-3.6	1.17 H	232	42.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

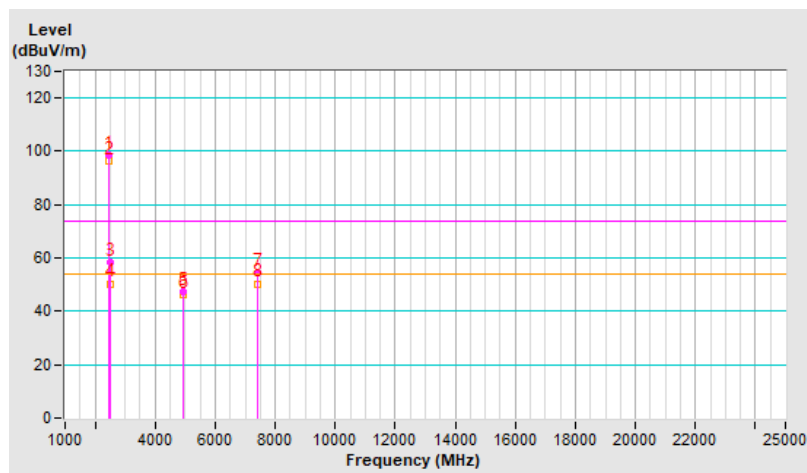


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	95.7 PK			2.67 V	230	99.1	-3.4
2	*2467.00	93.4 AV			2.67 V	230	96.8	-3.4
3	2483.50	58.1 PK	74.0	-15.9	2.67 V	230	61.5	-3.4
4	2483.50	49.4 AV	54.0	-4.6	2.67 V	230	52.8	-3.4
5	4934.00	46.0 PK	74.0	-28.0	1.00 V	204	44.4	1.6
6	4934.00	43.9 AV	54.0	-10.1	1.00 V	204	42.3	1.6
7	7401.00	54.0 PK	74.0	-20.0	1.26 V	297	46.1	7.9
8	7401.00	49.8 AV	54.0	-4.2	1.26 V	297	41.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

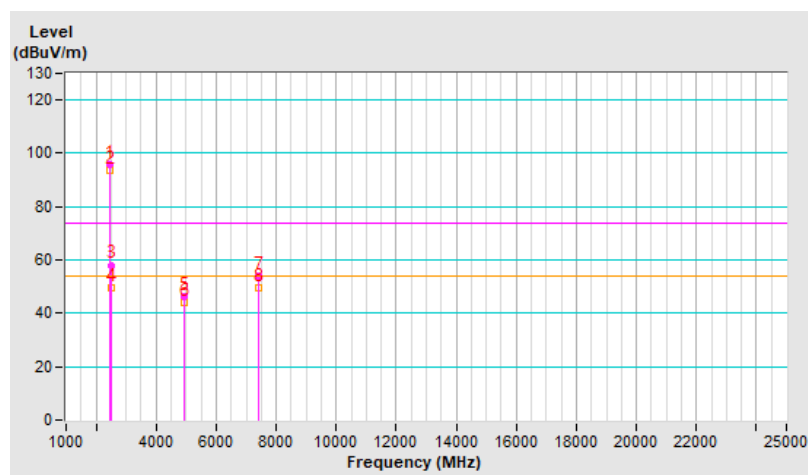


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	95.6 PK			1.93 H	120	99.0	-3.4
2	*2472.00	93.3 AV			1.93 H	120	96.7	-3.4
3	2483.50	57.5 PK	74.0	-16.5	1.93 H	120	60.9	-3.4
4	2483.50	50.3 AV	54.0	-3.7	1.93 H	120	53.7	-3.4
5	4944.00	47.9 PK	74.0	-26.1	1.04 H	180	46.3	1.6
6	4944.00	46.1 AV	54.0	-7.9	1.04 H	180	44.5	1.6
7	7416.00	54.8 PK	74.0	-19.2	1.19 H	218	47.0	7.8
8	7416.00	50.8 AV	54.0	-3.2	1.19 H	218	43.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

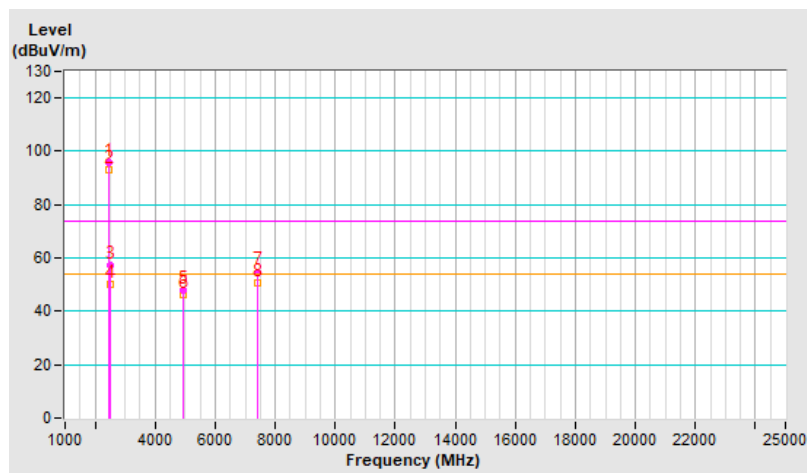


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	92.4 PK			2.61 V	207	95.8	-3.4
2	*2472.00	90.1 AV			2.61 V	207	93.5	-3.4
3	2483.50	56.8 PK	74.0	-17.2	2.61 V	207	60.2	-3.4
4	2483.50	48.5 AV	54.0	-5.5	2.61 V	207	51.9	-3.4
5	4944.00	45.3 PK	74.0	-28.7	1.00 V	192	43.7	1.6
6	4944.00	43.5 AV	54.0	-10.5	1.00 V	192	41.9	1.6
7	7416.00	54.1 PK	74.0	-19.9	1.15 V	297	46.3	7.8
8	7416.00	49.8 AV	54.0	-4.2	1.15 V	297	42.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

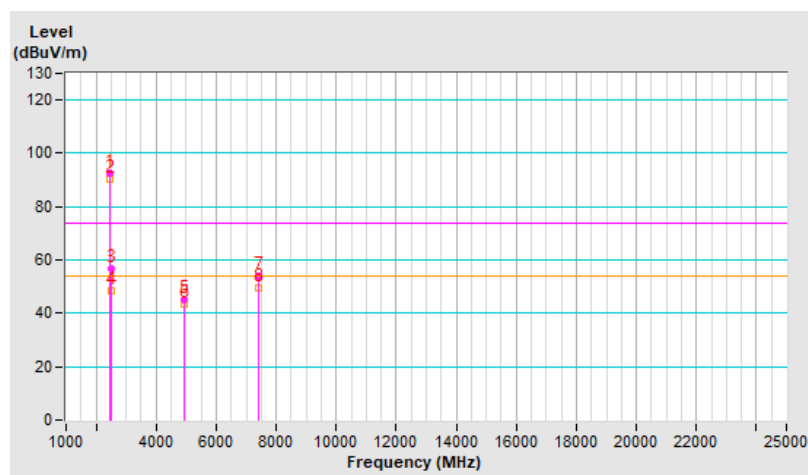


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.5 PK	74.0	-0.5	1.93 H	108	77.1	-3.6
2	2390.00	46.4 AV	54.0	-7.6	1.93 H	108	50.0	-3.6
3	*2412.00	107.1 PK			1.93 H	108	110.6	-3.5
4	*2412.00	98.1 AV			1.93 H	108	101.6	-3.5
5	4824.00	48.0 PK	74.0	-26.0	1.05 H	186	46.3	1.7
6	4824.00	45.9 AV	54.0	-8.1	1.05 H	186	44.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

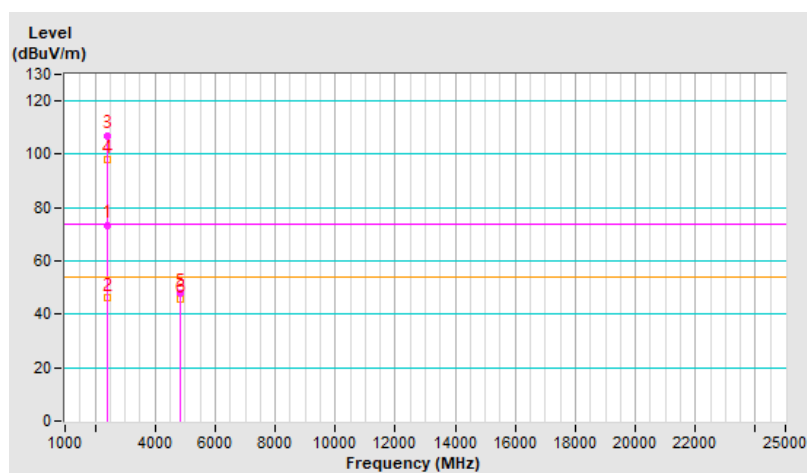


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.4 PK	74.0	-5.6	2.65 V	230	72.0	-3.6
2	2390.00	47.2 AV	54.0	-6.8	2.65 V	230	50.8	-3.6
3	*2412.00	104.1 PK			2.65 V	230	107.6	-3.5
4	*2412.00	94.7 AV			2.65 V	230	98.2	-3.5
5	4824.00	45.1 PK	74.0	-28.9	1.00 V	192	43.4	1.7
6	4824.00	43.7 AV	54.0	-10.3	1.00 V	192	42.0	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

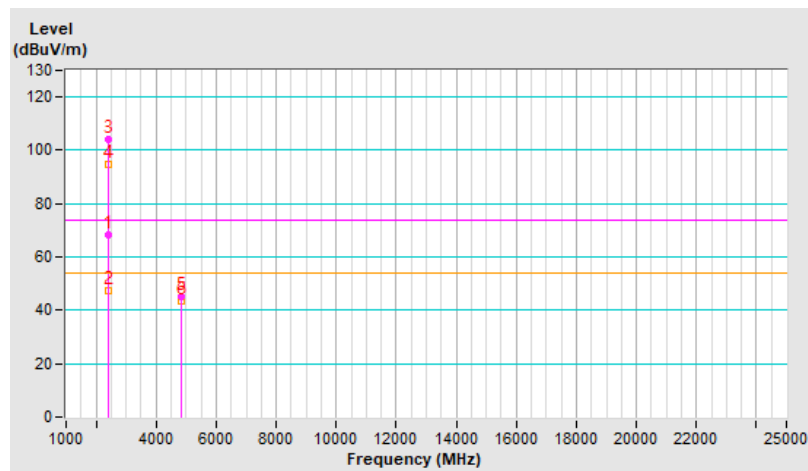


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.6 PK	74.0	-14.4	1.95 H	96	63.2	-3.6
2	2390.00	43.1 AV	54.0	-10.9	1.95 H	96	46.7	-3.6
3	*2437.00	110.2 PK			1.95 H	96	113.7	-3.5
4	*2437.00	101.1 AV			1.95 H	96	104.6	-3.5
5	2483.50	63.3 PK	74.0	-10.7	1.95 H	96	66.7	-3.4
6	2483.50	43.7 AV	54.0	-10.3	1.95 H	96	47.1	-3.4
7	4874.00	47.9 PK	74.0	-26.1	1.00 H	170	46.4	1.5
8	4874.00	46.4 AV	54.0	-7.6	1.00 H	170	44.9	1.5
9	7311.00	54.2 PK	74.0	-19.8	1.19 H	213	46.6	7.6
10	7311.00	50.6 AV	54.0	-3.4	1.19 H	213	43.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

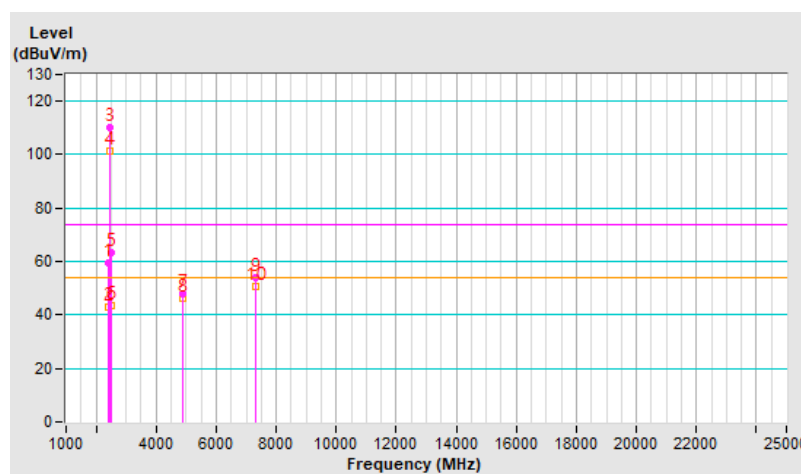


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	2.61 V	207	71.7	-3.6
2	2390.00	47.5 AV	54.0	-6.5	2.61 V	207	51.1	-3.6
3	*2437.00	107.2 PK			2.61 V	207	110.7	-3.5
4	*2437.00	97.6 AV			2.61 V	207	101.1	-3.5
5	2483.50	66.3 PK	74.0	-7.7	2.61 V	207	69.7	-3.4
6	2483.50	48.1 AV	54.0	-5.9	2.61 V	207	51.5	-3.4
7	4874.00	44.8 PK	74.0	-29.2	1.00 V	197	43.3	1.5
8	4874.00	43.3 AV	54.0	-10.7	1.00 V	197	41.8	1.5
9	7311.00	53.6 PK	74.0	-20.4	1.20 V	299	46.0	7.6
10	7311.00	49.7 AV	54.0	-4.3	1.20 V	299	42.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

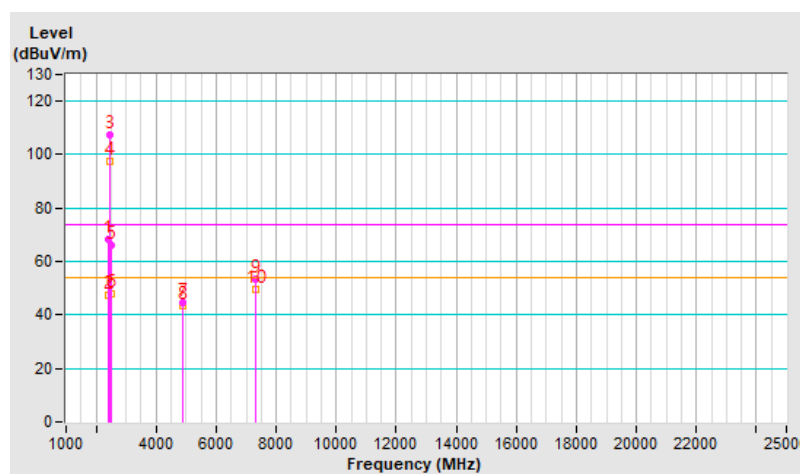


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.2 PK			1.90 H	109	110.7	-3.5
2	*2462.00	97.8 AV			1.90 H	109	101.3	-3.5
3	2483.50	71.5 PK	74.0	-2.5	1.90 H	109	74.9	-3.4
4	2483.50	47.0 AV	54.0	-7.0	1.90 H	109	50.4	-3.4
5	4924.00	47.9 PK	74.0	-26.1	1.02 H	182	46.3	1.6
6	4924.00	46.3 AV	54.0	-7.7	1.02 H	182	44.7	1.6
7	7386.00	54.1 PK	74.0	-19.9	1.15 H	208	46.2	7.9
8	7386.00	50.3 AV	54.0	-3.7	1.15 H	208	42.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

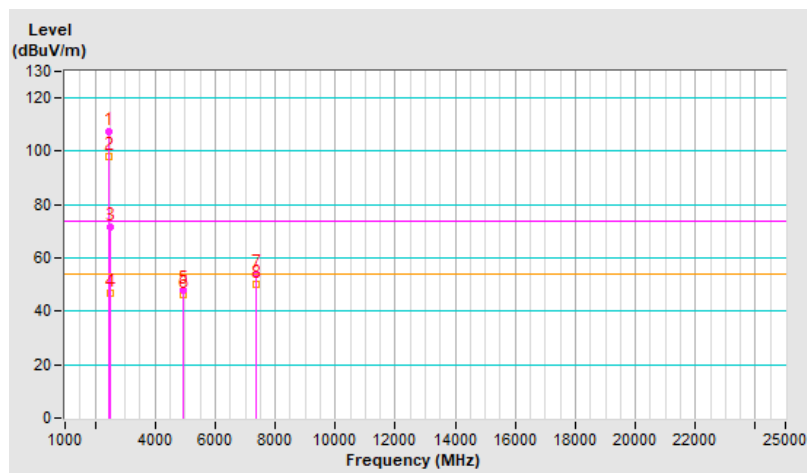


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.1 PK			2.60 V	231	107.6	-3.5
2	*2462.00	94.6 AV			2.60 V	231	98.1	-3.5
3	2483.50	67.3 PK	74.0	-6.7	2.60 V	231	70.7	-3.4
4	2483.50	49.2 AV	54.0	-4.8	2.60 V	231	52.6	-3.4
5	4924.00	45.4 PK	74.0	-28.6	1.00 V	217	43.8	1.6
6	4924.00	43.8 AV	54.0	-10.2	1.00 V	217	42.2	1.6
7	7386.00	55.0 PK	74.0	-19.0	1.19 V	308	47.1	7.9
8	7386.00	50.6 AV	54.0	-3.4	1.19 V	308	42.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

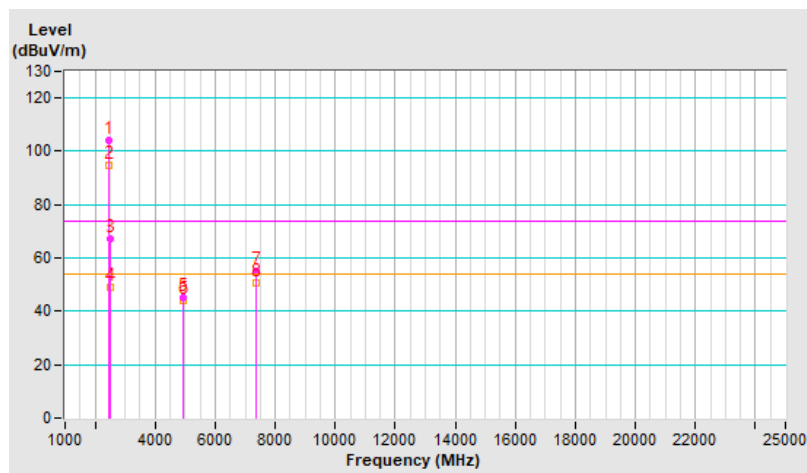


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.4 PK			1.88 H	117	109.8	-3.4
2	*2467.00	97.2 AV			1.88 H	117	100.6	-3.4
3	2483.50	65.3 PK	74.0	-8.7	1.88 H	117	68.7	-3.4
4	2483.50	47.1 AV	54.0	-6.9	1.88 H	117	50.5	-3.4
5	4934.00	47.5 PK	74.0	-26.5	1.00 H	194	45.9	1.6
6	4934.00	45.7 AV	54.0	-8.3	1.00 H	194	44.1	1.6
7	7401.00	54.2 PK	74.0	-19.8	1.13 H	231	46.3	7.9
8	7401.00	50.6 AV	54.0	-3.4	1.13 H	231	42.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

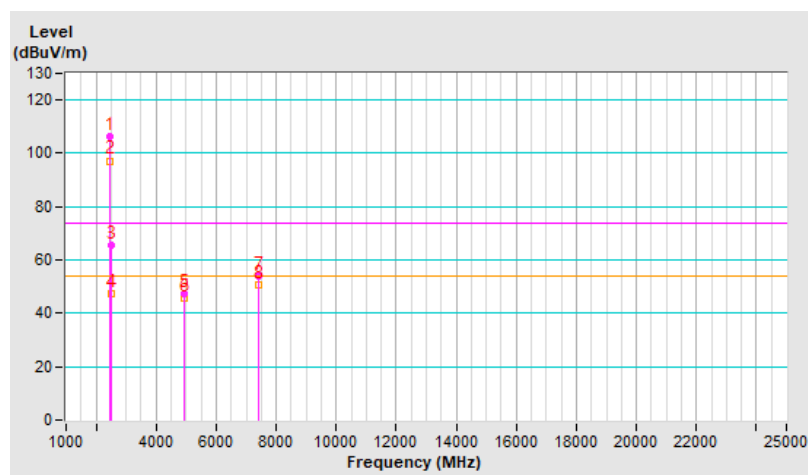


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	103.3 PK			2.60 V	205	106.7	-3.4
2	*2467.00	94.1 AV			2.60 V	205	97.5	-3.4
3	2483.50	63.9 PK	74.0	-10.1	2.60 V	205	67.3	-3.4
4	2483.50	46.4 AV	54.0	-7.6	2.60 V	205	49.8	-3.4
5	4934.00	46.0 PK	74.0	-28.0	1.00 V	215	44.4	1.6
6	4934.00	44.1 AV	54.0	-9.9	1.00 V	215	42.5	1.6
7	7401.00	55.0 PK	74.0	-19.0	1.19 V	280	47.1	7.9
8	7401.00	50.6 AV	54.0	-3.4	1.19 V	280	42.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

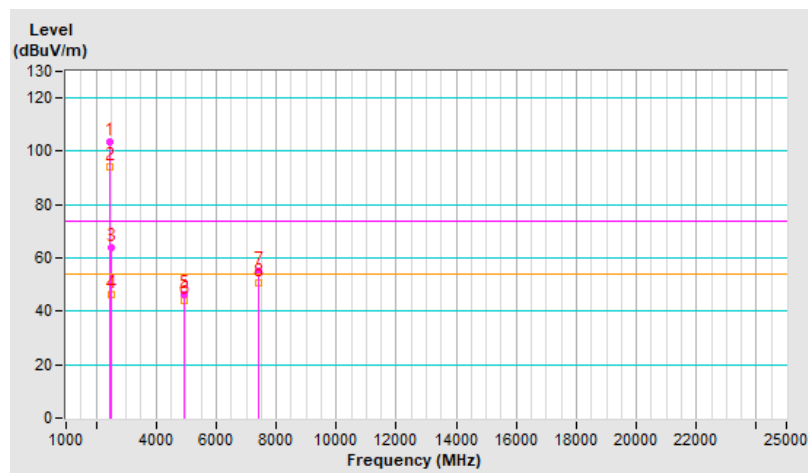


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.3 PK			1.89 H	128	108.7	-3.4
2	*2472.00	96.1 AV			1.89 H	128	99.5	-3.4
3	2483.50	59.2 PK	74.0	-14.8	1.89 H	128	62.6	-3.4
4	2483.50	46.3 AV	54.0	-7.7	1.89 H	128	49.7	-3.4
5	4944.00	47.6 PK	74.0	-26.4	1.00 H	169	46.0	1.6
6	4944.00	45.8 AV	54.0	-8.2	1.00 H	169	44.2	1.6
7	7416.00	54.7 PK	74.0	-19.3	1.10 H	220	46.9	7.8
8	7416.00	51.0 AV	54.0	-3.0	1.10 H	220	43.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

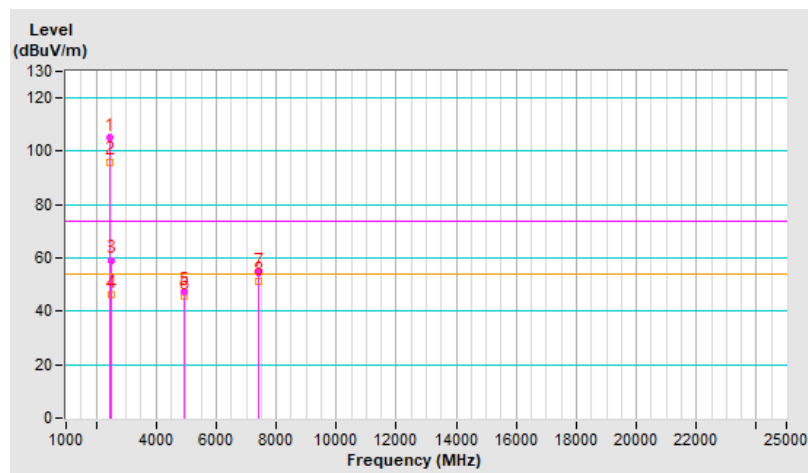


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.5 PK			2.60 V	203	105.9	-3.4
2	*2472.00	92.5 AV			2.60 V	203	95.9	-3.4
3	2483.50	68.2 PK	74.0	-5.8	2.60 V	203	71.6	-3.4
4	2483.50	46.2 AV	54.0	-7.8	2.60 V	203	49.6	-3.4
5	4944.00	45.6 PK	74.0	-28.4	1.01 V	190	44.0	1.6
6	4944.00	43.8 AV	54.0	-10.2	1.01 V	190	42.2	1.6
7	7416.00	54.5 PK	74.0	-19.5	1.21 V	296	46.7	7.8
8	7416.00	50.6 AV	54.0	-3.4	1.21 V	296	42.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

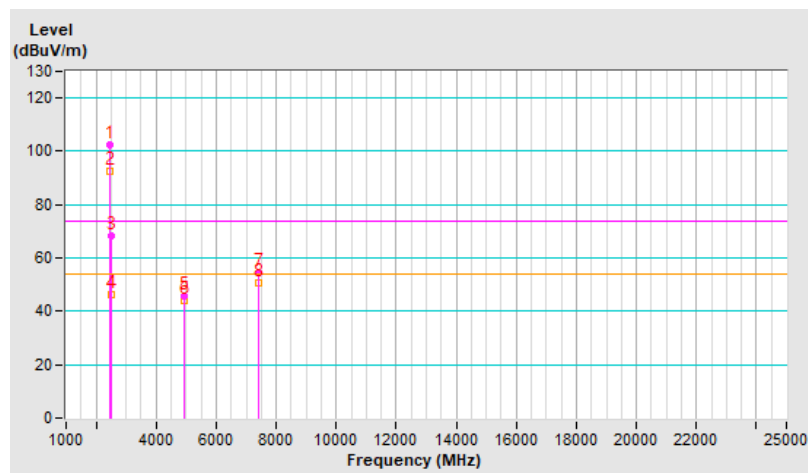


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.9 PK	74.0	-1.1	1.87 H	120	76.5	-3.6
2	2390.00	45.0 AV	54.0	-9.0	1.87 H	120	48.6	-3.6
3	*2412.00	107.9 PK			1.87 H	120	111.4	-3.5
4	*2412.00	95.8 AV			1.87 H	120	99.3	-3.5
5	4824.00	47.6 PK	74.0	-26.4	1.00 H	197	45.9	1.7
6	4824.00	46.1 AV	54.0	-7.9	1.00 H	197	44.4	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

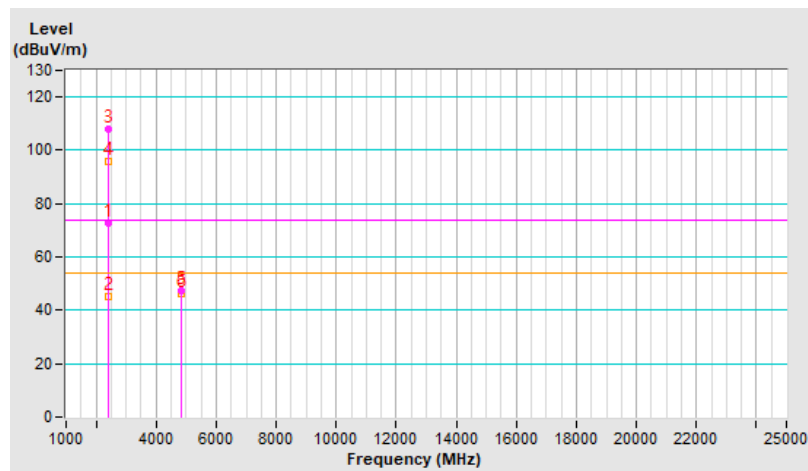


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.1 PK	74.0	-2.9	2.64 V	203	74.7	-3.6
2	2390.00	44.6 AV	54.0	-9.4	2.64 V	203	48.2	-3.6
3	*2412.00	105.1 PK			2.64 V	203	108.6	-3.5
4	*2412.00	92.6 AV			2.64 V	203	96.1	-3.5
5	4824.00	44.6 PK	74.0	-29.4	1.00 V	190	42.9	1.7
6	4824.00	43.2 AV	54.0	-10.8	1.00 V	190	41.5	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

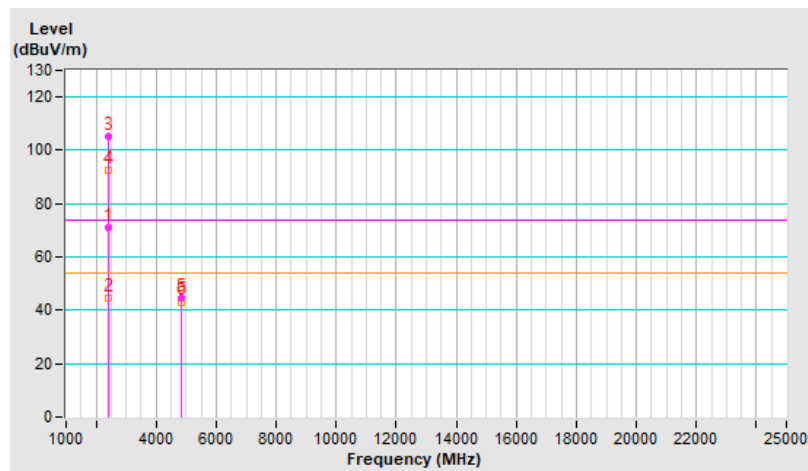


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	1.91 H	113	74.5	-3.6
2	2390.00	43.6 AV	54.0	-10.4	1.91 H	113	47.2	-3.6
3	*2437.00	112.0 PK			1.91 H	113	115.5	-3.5
4	*2437.00	100.1 AV			1.91 H	113	103.6	-3.5
5	2483.50	62.0 PK	74.0	-12.0	1.91 H	113	65.4	-3.4
6	2483.50	44.7 AV	54.0	-9.3	1.91 H	113	48.1	-3.4
7	4874.00	47.8 PK	74.0	-26.2	1.02 H	182	46.3	1.5
8	4874.00	46.3 AV	54.0	-7.7	1.02 H	182	44.8	1.5
9	7311.00	55.2 PK	74.0	-18.8	1.13 H	225	47.6	7.6
10	7311.00	51.2 AV	54.0	-2.8	1.13 H	225	43.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

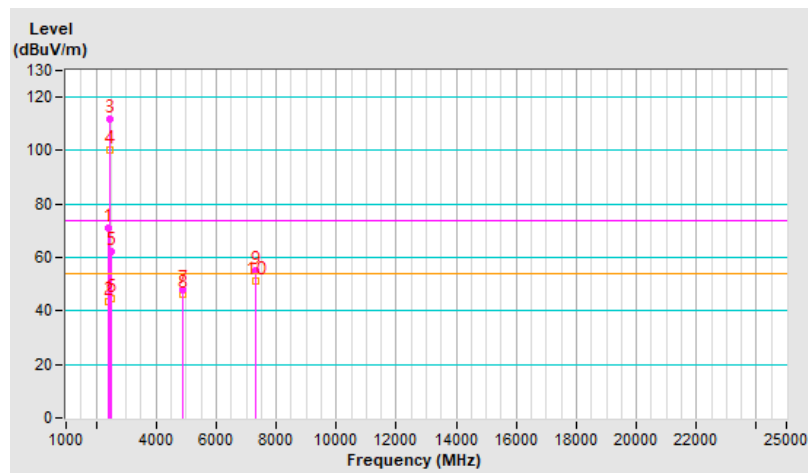


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.5 PK	74.0	-4.5	2.63 V	227	73.1	-3.6
2	2390.00	43.1 AV	54.0	-10.9	2.63 V	227	46.7	-3.6
3	*2437.00	110.1 PK			2.63 V	227	113.6	-3.5
4	*2437.00	98.2 AV			2.63 V	227	101.7	-3.5
5	2483.50	61.0 PK	74.0	-13.0	2.63 V	227	64.4	-3.4
6	2483.50	44.2 AV	54.0	-9.8	2.63 V	227	47.6	-3.4
7	4874.00	46.0 PK	74.0	-28.0	1.00 V	187	44.5	1.5
8	4874.00	44.0 AV	54.0	-10.0	1.00 V	187	42.5	1.5
9	7311.00	54.7 PK	74.0	-19.3	1.24 V	303	47.1	7.6
10	7311.00	50.3 AV	54.0	-3.7	1.24 V	303	42.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

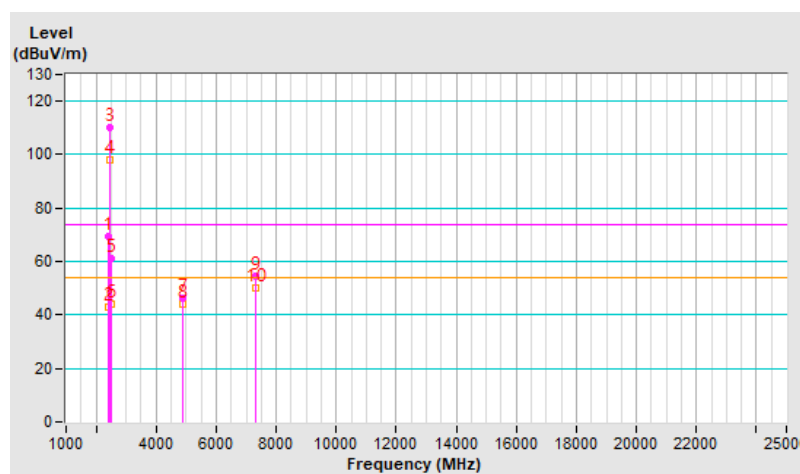


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.0 PK			1.91 H	133	111.5	-3.5
2	*2462.00	96.1 AV			1.91 H	133	99.6	-3.5
3	2483.50	71.2 PK	74.0	-2.8	1.91 H	133	74.6	-3.4
4	2483.50	46.8 AV	54.0	-7.2	1.91 H	133	50.2	-3.4
5	4924.00	47.4 PK	74.0	-26.6	1.00 H	185	45.8	1.6
6	4924.00	45.9 AV	54.0	-8.1	1.00 H	185	44.3	1.6
7	7386.00	55.0 PK	74.0	-19.0	1.15 H	206	47.1	7.9
8	7386.00	51.0 AV	54.0	-3.0	1.15 H	206	43.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

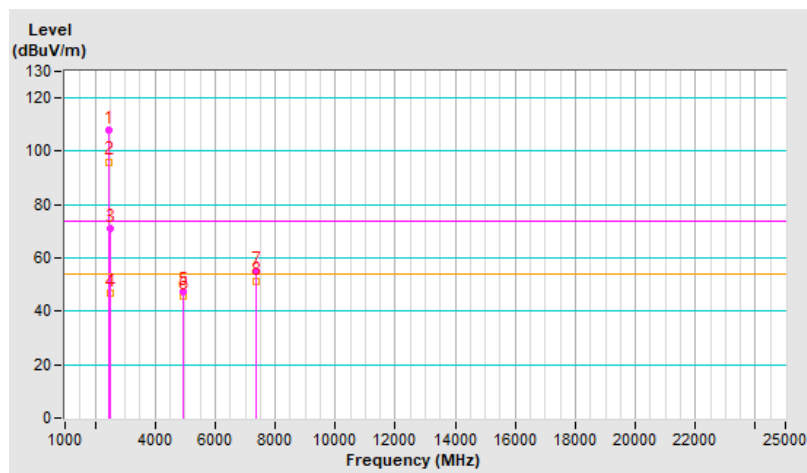


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.3 PK			2.60 V	222	109.8	-3.5
2	*2462.00	94.3 AV			2.60 V	222	97.8	-3.5
3	2483.50	66.1 PK	74.0	-7.9	2.60 V	222	69.5	-3.4
4	2483.50	43.9 AV	54.0	-10.1	2.60 V	222	47.3	-3.4
5	4924.00	45.1 PK	74.0	-28.9	1.00 V	214	43.5	1.6
6	4924.00	43.5 AV	54.0	-10.5	1.00 V	214	41.9	1.6
7	7386.00	54.4 PK	74.0	-19.6	1.25 V	287	46.5	7.9
8	7386.00	50.6 AV	54.0	-3.4	1.25 V	287	42.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

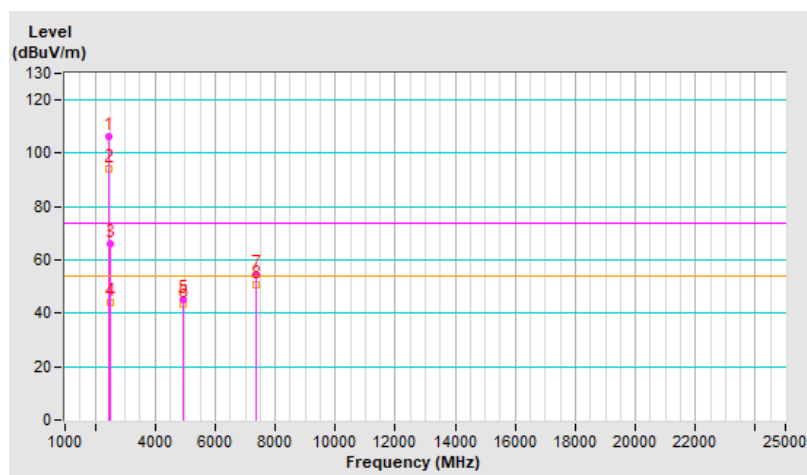


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.7 PK			1.89 H	130	110.1	-3.4
2	*2467.00	95.2 AV			1.89 H	130	98.6	-3.4
3	2483.50	68.1 PK	74.0	-5.9	1.89 H	130	71.5	-3.4
4	2483.50	46.6 AV	54.0	-7.4	1.89 H	130	50.0	-3.4
5	4934.00	47.9 PK	74.0	-26.1	1.00 H	194	46.3	1.6
6	4934.00	46.2 AV	54.0	-7.8	1.00 H	194	44.6	1.6
7	7401.00	53.9 PK	74.0	-20.1	1.10 H	221	46.0	7.9
8	7401.00	50.3 AV	54.0	-3.7	1.10 H	221	42.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

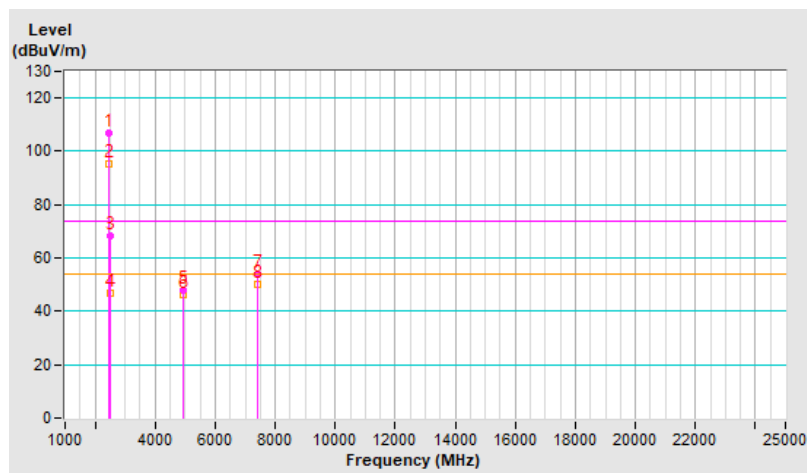


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.6 PK			2.67 V	207	108.0	-3.4
2	*2467.00	92.4 AV			2.67 V	207	95.8	-3.4
3	2483.50	60.1 PK	74.0	-13.9	2.67 V	207	63.5	-3.4
4	2483.50	44.3 AV	54.0	-9.7	2.67 V	207	47.7	-3.4
5	4934.00	45.7 PK	74.0	-28.3	1.00 V	195	44.1	1.6
6	4934.00	44.1 AV	54.0	-9.9	1.00 V	195	42.5	1.6
7	7401.00	54.4 PK	74.0	-19.6	1.23 V	303	46.5	7.9
8	7401.00	50.2 AV	54.0	-3.8	1.23 V	303	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

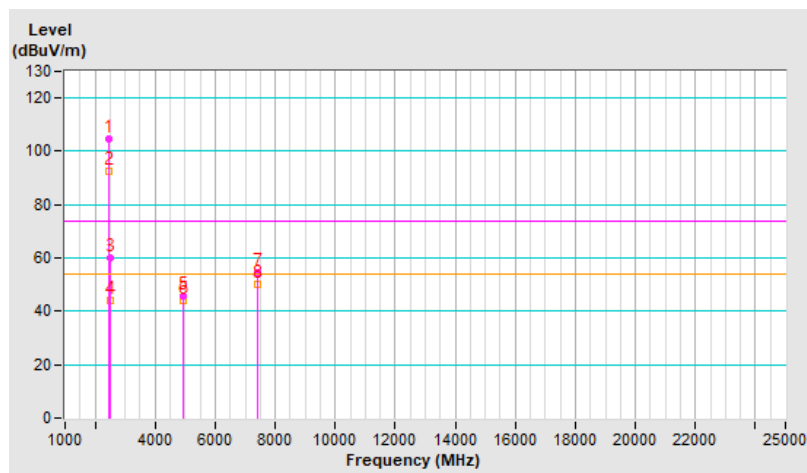


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.5 PK			1.84 H	114	109.9	-3.4
2	*2472.00	95.5 AV			1.84 H	114	98.9	-3.4
3	2483.50	67.9 PK	74.0	-6.1	1.84 H	114	71.3	-3.4
4	2483.50	47.3 AV	54.0	-6.7	1.84 H	114	50.7	-3.4
5	4944.00	48.0 PK	74.0	-26.0	1.02 H	197	46.4	1.6
6	4944.00	46.4 AV	54.0	-7.6	1.02 H	197	44.8	1.6
7	7416.00	54.4 PK	74.0	-19.6	1.11 H	205	46.6	7.8
8	7416.00	50.8 AV	54.0	-3.2	1.11 H	205	43.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

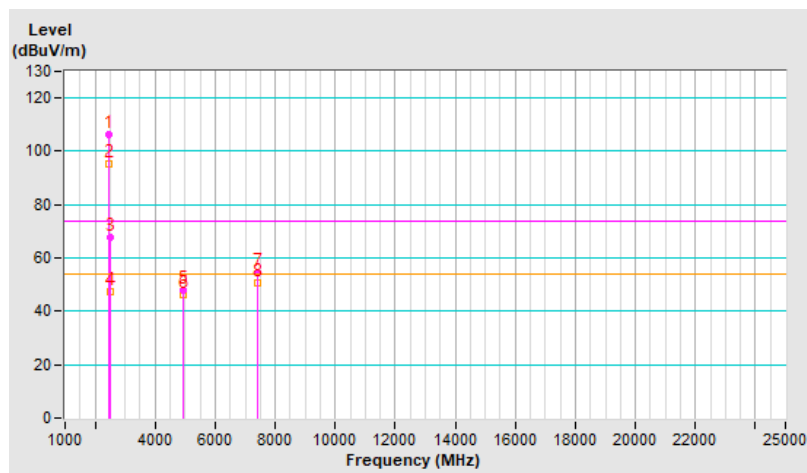


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.9 PK			2.65 V	204	108.3	-3.4
2	*2472.00	92.6 AV			2.65 V	204	96.0	-3.4
3	2483.50	68.4 PK	74.0	-5.6	2.65 V	204	71.8	-3.4
4	2483.50	48.1 AV	54.0	-5.9	2.65 V	204	51.5	-3.4
5	4944.00	45.5 PK	74.0	-28.5	1.00 V	189	43.9	1.6
6	4944.00	43.9 AV	54.0	-10.1	1.00 V	189	42.3	1.6
7	7416.00	54.5 PK	74.0	-19.5	1.25 V	283	46.7	7.8
8	7416.00	50.2 AV	54.0	-3.8	1.25 V	283	42.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

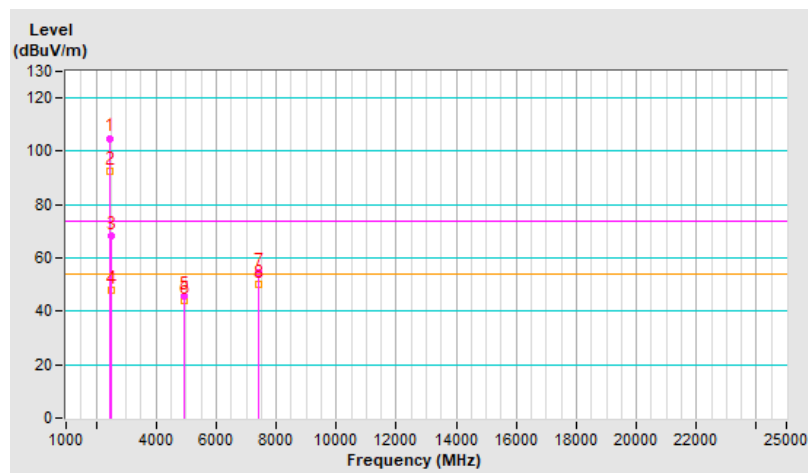


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.7 PK	74.0	-1.3	1.86 H	113	76.3	-3.6
2	2390.00	47.6 AV	54.0	-6.4	1.86 H	113	51.2	-3.6
3	*2422.00	103.5 PK			1.86 H	113	107.0	-3.5
4	*2422.00	91.9 AV			1.86 H	113	95.4	-3.5
5	4844.00	47.3 PK	74.0	-26.7	1.07 H	166	45.7	1.6
6	4844.00	45.7 AV	54.0	-8.3	1.07 H	166	44.1	1.6
7	7266.00	54.4 PK	74.0	-19.6	1.11 H	211	47.1	7.3
8	7266.00	50.4 AV	54.0	-3.6	1.11 H	211	43.1	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

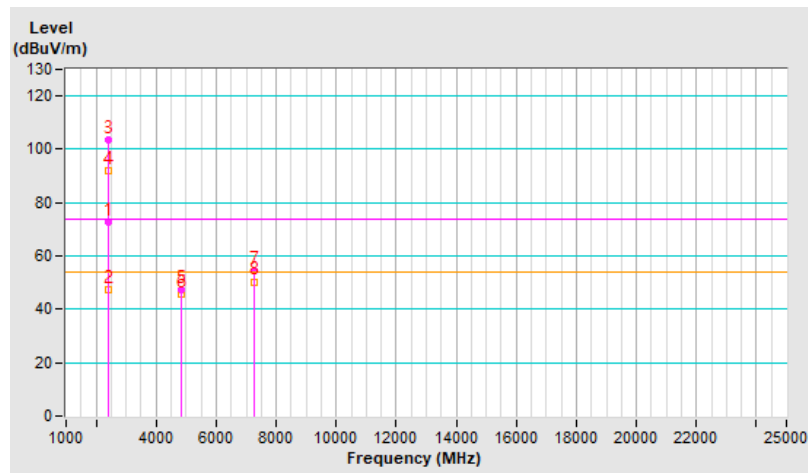


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	2.68 V	205	70.1	-3.6
2	2390.00	45.4 AV	54.0	-8.6	2.68 V	205	49.0	-3.6
3	*2422.00	101.3 PK			2.68 V	205	104.8	-3.5
4	*2422.00	89.1 AV			2.68 V	205	92.6	-3.5
5	4844.00	45.7 PK	74.0	-28.3	1.00 V	218	44.1	1.6
6	4844.00	44.0 AV	54.0	-10.0	1.00 V	218	42.4	1.6
7	7266.00	54.4 PK	74.0	-19.6	1.21 V	281	47.1	7.3
8	7266.00	50.3 AV	54.0	-3.7	1.21 V	281	43.0	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

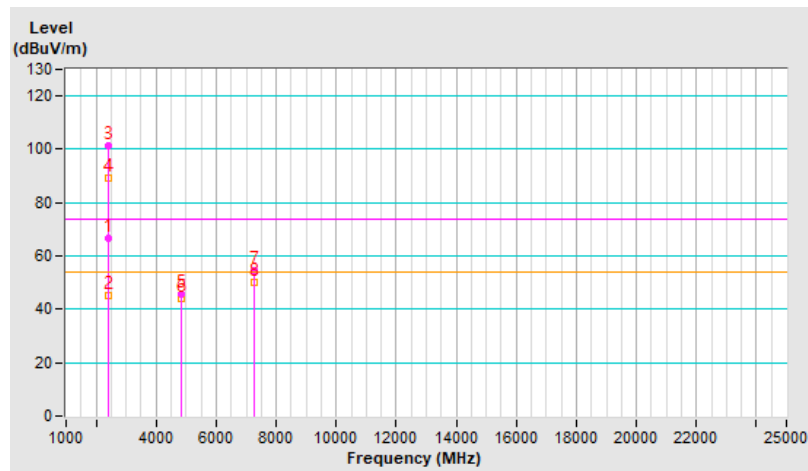


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	1.81 H	122	74.8	-3.6
2	2390.00	52.3 AV	54.0	-1.7	1.81 H	122	55.9	-3.6
3	*2437.00	108.5 PK			1.81 H	122	112.0	-3.5
4	*2437.00	96.2 AV			1.81 H	122	99.7	-3.5
5	2483.50	71.5 PK	74.0	-2.5	1.81 H	122	74.9	-3.4
6	2483.50	51.6 AV	54.0	-2.4	1.81 H	122	55.0	-3.4
7	4874.00	47.9 PK	74.0	-26.1	1.07 H	192	46.4	1.5
8	4874.00	46.1 AV	54.0	-7.9	1.07 H	192	44.6	1.5
9	7311.00	54.3 PK	74.0	-19.7	1.09 H	223	46.7	7.6
10	7311.00	50.4 AV	54.0	-3.6	1.09 H	223	42.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

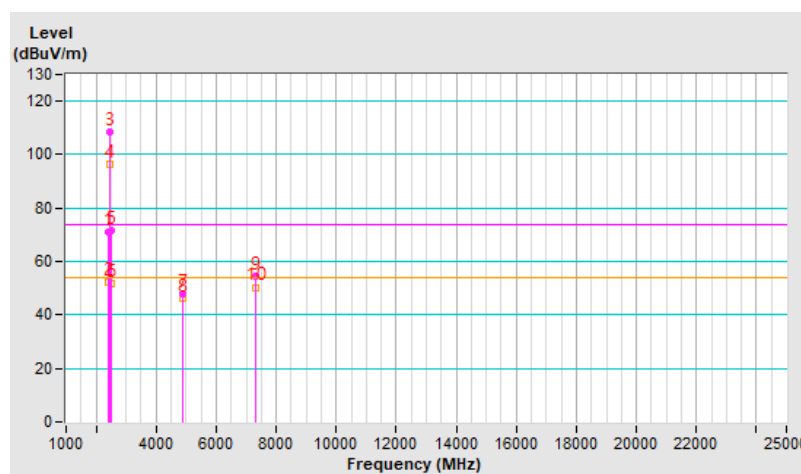


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.5 PK	74.0	-4.5	2.64 V	217	73.1	-3.6
2	2390.00	51.3 AV	54.0	-2.7	2.64 V	217	54.9	-3.6
3	*2437.00	106.2 PK			2.64 V	217	109.7	-3.5
4	*2437.00	94.3 AV			2.64 V	217	97.8	-3.5
5	2483.50	69.1 PK	74.0	-4.9	2.64 V	217	72.5	-3.4
6	2483.50	50.2 AV	54.0	-3.8	2.64 V	217	53.6	-3.4
7	4874.00	45.0 PK	74.0	-29.0	1.00 V	193	43.5	1.5
8	4874.00	43.4 AV	54.0	-10.6	1.00 V	193	41.9	1.5
9	7311.00	53.9 PK	74.0	-20.1	1.20 V	295	46.3	7.6
10	7311.00	49.6 AV	54.0	-4.4	1.20 V	295	42.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

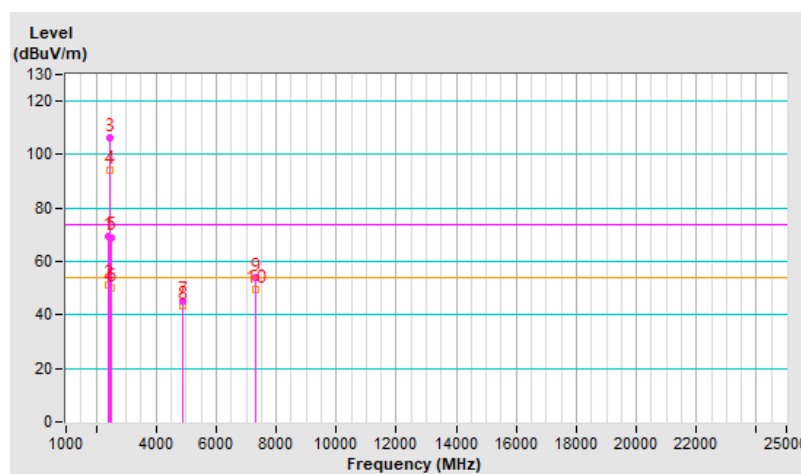


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	105.3 PK			1.86 H	119	108.7	-3.4
2	*2452.00	93.1 AV			1.86 H	119	96.5	-3.4
3	2483.50	62.5 PK	74.0	-11.5	1.86 H	119	65.9	-3.4
4	2483.50	45.6 AV	54.0	-8.4	1.86 H	119	49.0	-3.4
5	4904.00	47.7 PK	74.0	-26.3	1.00 H	171	46.2	1.5
6	4904.00	46.3 AV	54.0	-7.7	1.00 H	171	44.8	1.5
7	7356.00	54.4 PK	74.0	-19.6	1.19 H	202	46.5	7.9
8	7356.00	50.4 AV	54.0	-3.6	1.19 H	202	42.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

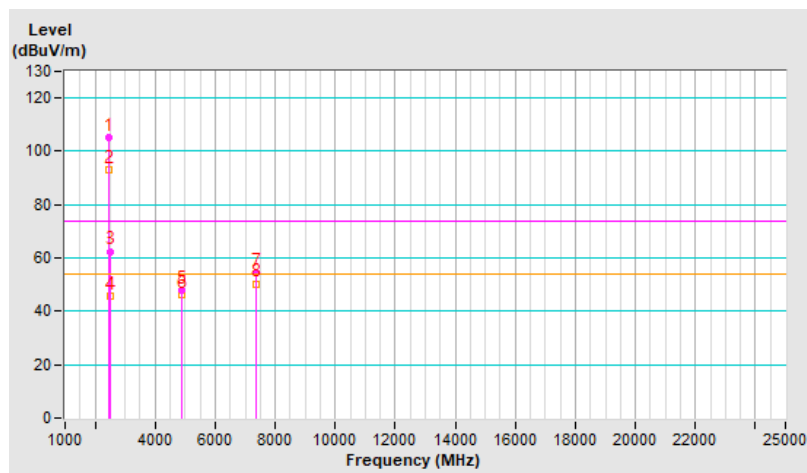


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	103.7 PK			2.62 V	211	107.1	-3.4
2	*2452.00	90.2 AV			2.62 V	211	93.6	-3.4
3	2483.50	73.1 PK	74.0	-0.9	2.62 V	211	76.5	-3.4
4	2483.50	51.2 AV	54.0	-2.8	2.62 V	211	54.6	-3.4
5	4904.00	45.6 PK	74.0	-28.4	1.00 V	212	44.1	1.5
6	4904.00	43.6 AV	54.0	-10.4	1.00 V	212	42.1	1.5
7	7356.00	54.8 PK	74.0	-19.2	1.21 V	284	46.9	7.9
8	7356.00	50.5 AV	54.0	-3.5	1.21 V	284	42.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

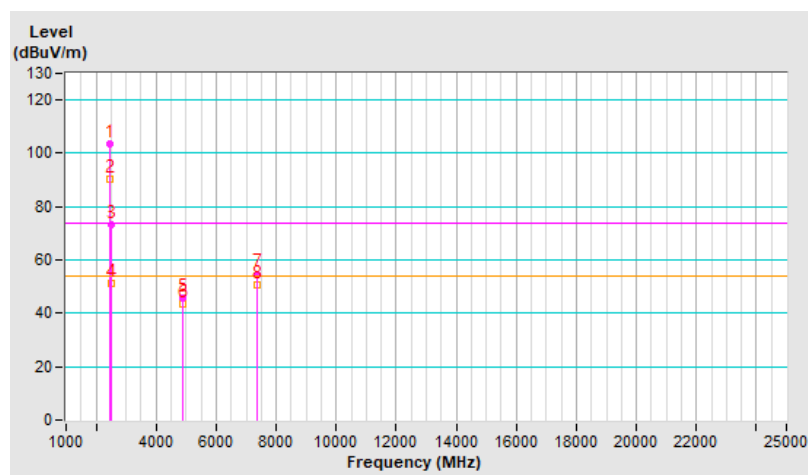


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	104.0 PK			1.88 H	119	107.4	-3.4
2	*2457.00	92.6 AV			1.88 H	119	96.0	-3.4
3	2483.50	64.5 PK	74.0	-9.5	1.88 H	119	67.9	-3.4
4	2483.50	45.3 AV	54.0	-8.7	1.88 H	119	48.7	-3.4
5	4914.00	47.4 PK	74.0	-26.6	1.01 H	179	45.9	1.5
6	4914.00	46.2 AV	54.0	-7.8	1.01 H	179	44.7	1.5
7	7371.00	55.0 PK	74.0	-19.0	1.09 H	211	47.2	7.8
8	7371.00	50.9 AV	54.0	-3.1	1.09 H	211	43.1	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

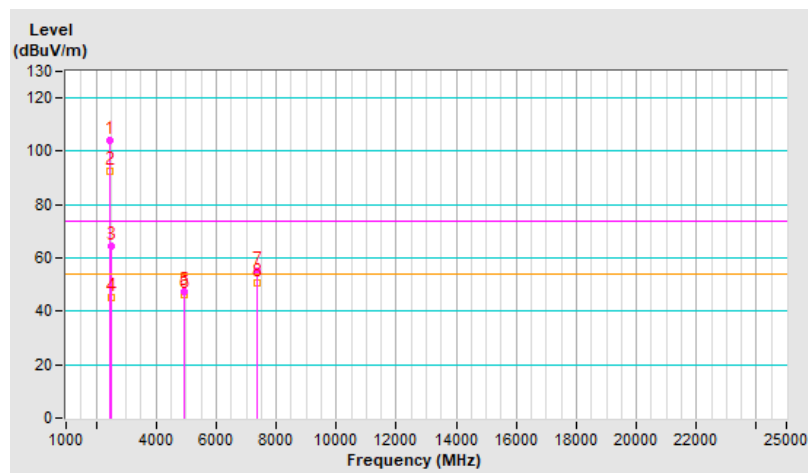


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	102.3 PK			2.73 V	211	105.7	-3.4
2	*2457.00	90.3 AV			2.73 V	211	93.7	-3.4
3	2483.50	57.6 PK	74.0	-16.4	2.73 V	211	61.0	-3.4
4	2483.50	45.7 AV	54.0	-8.3	2.73 V	211	49.1	-3.4
5	4914.00	45.5 PK	74.0	-28.5	1.00 V	206	44.0	1.5
6	4914.00	43.7 AV	54.0	-10.3	1.00 V	206	42.2	1.5
7	7371.00	54.1 PK	74.0	-19.9	1.23 V	289	46.3	7.8
8	7371.00	50.0 AV	54.0	-4.0	1.23 V	289	42.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

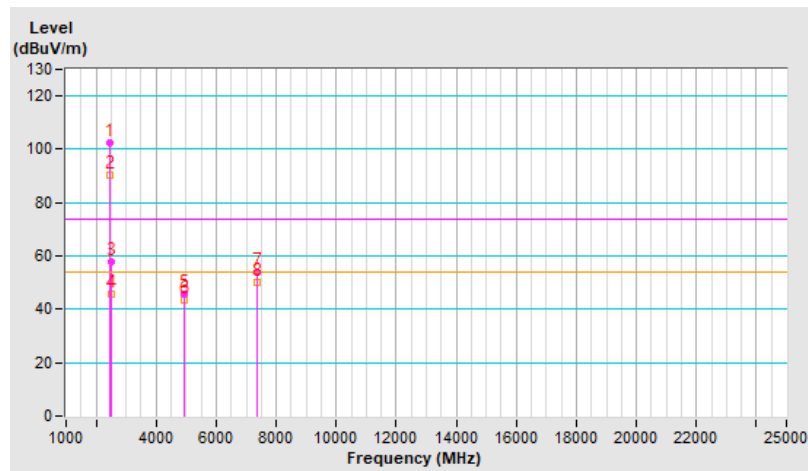


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.1 PK			1.81 H	113	107.6	-3.5
2	*2462.00	92.5 AV			1.81 H	113	96.0	-3.5
3	2483.50	65.5 PK	74.0	-8.5	1.81 H	113	68.9	-3.4
4	2483.50	48.1 AV	54.0	-5.9	1.81 H	113	51.5	-3.4
5	4924.00	47.7 PK	74.0	-26.3	1.02 H	192	46.1	1.6
6	4924.00	46.2 AV	54.0	-7.8	1.02 H	192	44.6	1.6
7	7386.00	53.8 PK	74.0	-20.2	1.10 H	226	45.9	7.9
8	7386.00	50.2 AV	54.0	-3.8	1.10 H	226	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

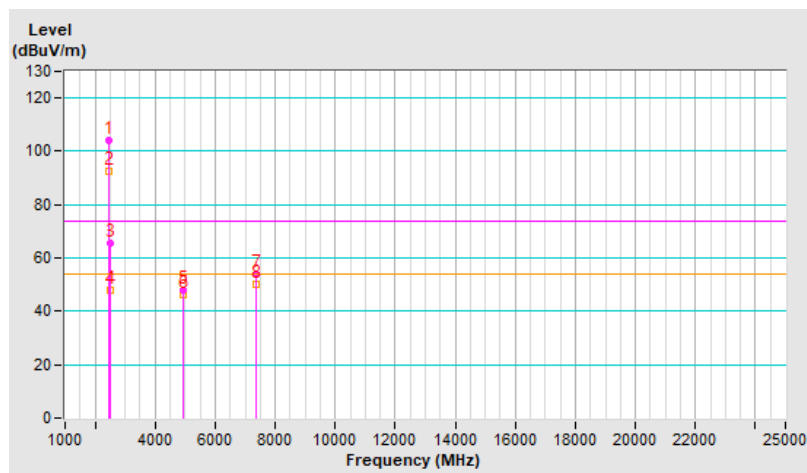


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.7 PK			2.68 V	214	106.2	-3.5
2	*2462.00	90.2 AV			2.68 V	214	93.7	-3.5
3	2483.50	62.8 PK	74.0	-11.2	2.68 V	214	66.2	-3.4
4	2483.50	45.3 AV	54.0	-8.7	2.68 V	214	48.7	-3.4
5	4924.00	46.1 PK	74.0	-27.9	1.00 V	218	44.5	1.6
6	4924.00	44.1 AV	54.0	-9.9	1.00 V	218	42.5	1.6
7	7386.00	54.1 PK	74.0	-19.9	1.26 V	307	46.2	7.9
8	7386.00	50.0 AV	54.0	-4.0	1.26 V	307	42.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

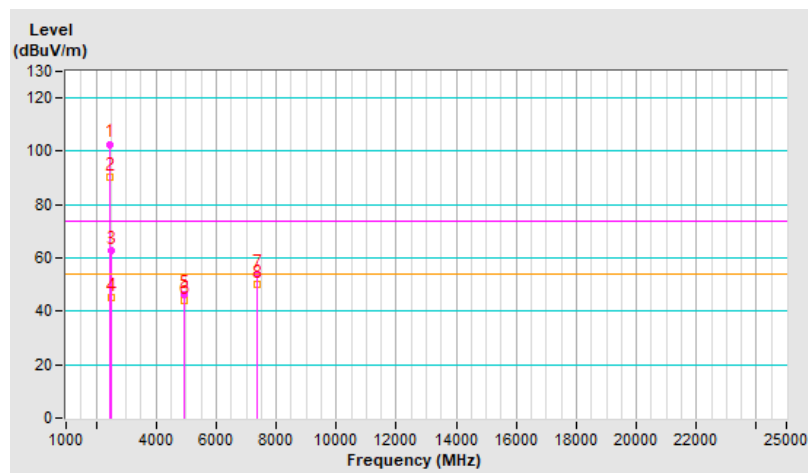


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.9 PK	74.0	-1.1	1.87 H	119	76.5	-3.6
2	2390.00	47.0 AV	54.0	-7.0	1.87 H	119	50.6	-3.6
3	*2412.00	115.8 PK			1.87 H	119	119.3	-3.5
4	*2412.00	105.4 AV			1.87 H	119	108.9	-3.5
5	4824.00	48.0 PK	74.0	-26.0	1.01 H	196	46.3	1.7
6	4824.00	46.5 AV	54.0	-7.5	1.01 H	196	44.8	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

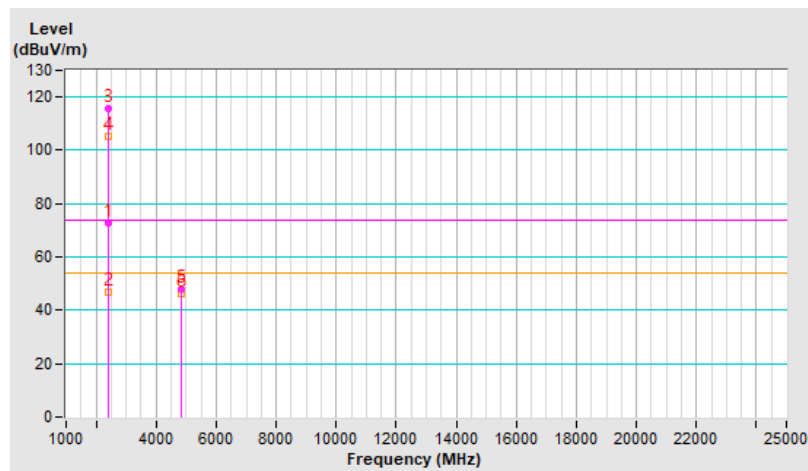


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.0 PK	74.0	-7.0	2.72 V	222	70.6	-3.6
2	2390.00	44.6 AV	54.0	-9.4	2.72 V	222	48.2	-3.6
3	*2412.00	113.2 PK			2.72 V	222	116.7	-3.5
4	*2412.00	101.9 AV			2.72 V	222	105.4	-3.5
5	4824.00	45.5 PK	74.0	-28.5	1.00 V	197	43.8	1.7
6	4824.00	43.6 AV	54.0	-10.4	1.00 V	197	41.9	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

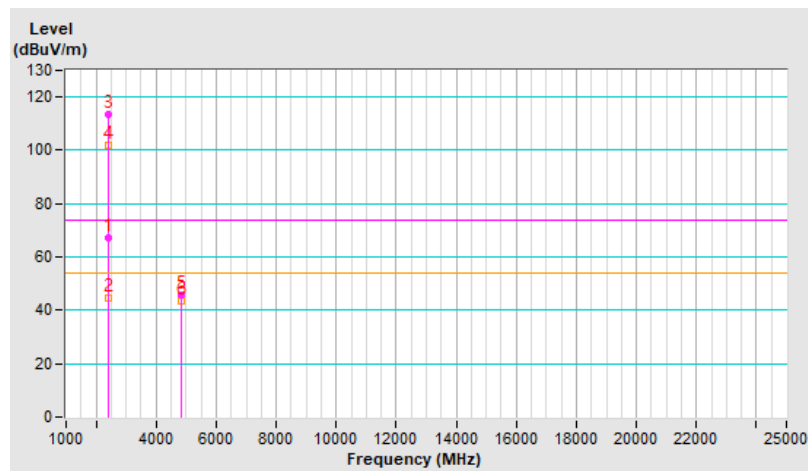


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.85 H	107	60.5	-3.6
2	2390.00	42.6 AV	54.0	-11.4	1.85 H	107	46.2	-3.6
3	*2437.00	118.3 PK			1.85 H	107	121.8	-3.5
4	*2437.00	107.8 AV			1.85 H	107	111.3	-3.5
5	2483.50	60.7 PK	74.0	-13.3	1.85 H	107	64.1	-3.4
6	2483.50	42.1 AV	54.0	-11.9	1.85 H	107	45.5	-3.4
7	4874.00	48.1 PK	74.0	-25.9	1.00 H	171	46.6	1.5
8	4874.00	46.3 AV	54.0	-7.7	1.00 H	171	44.8	1.5
9	7311.00	54.5 PK	74.0	-19.5	1.20 H	208	46.9	7.6
10	7311.00	50.4 AV	54.0	-3.6	1.20 H	208	42.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

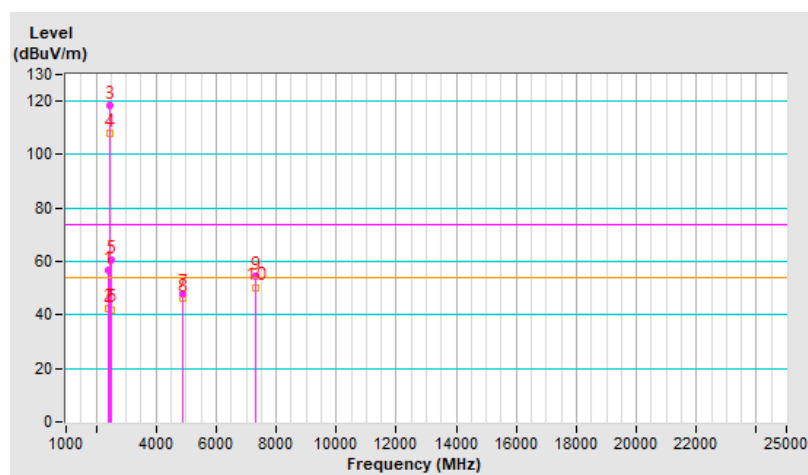


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.1 PK	74.0	-19.9	2.64 V	193	57.7	-3.6
2	2390.00	43.1 AV	54.0	-10.9	2.64 V	193	46.7	-3.6
3	*2437.00	116.2 PK			2.64 V	193	119.7	-3.5
4	*2437.00	105.2 AV			2.64 V	193	108.7	-3.5
5	2483.50	58.3 PK	74.0	-15.7	2.64 V	193	61.7	-3.4
6	2483.50	42.8 AV	54.0	-11.2	2.64 V	193	46.2	-3.4
7	4874.00	45.5 PK	74.0	-28.5	1.00 V	192	44.0	1.5
8	4874.00	43.5 AV	54.0	-10.5	1.00 V	192	42.0	1.5
9	7311.00	54.2 PK	74.0	-19.8	1.15 V	280	46.6	7.6
10	7311.00	50.2 AV	54.0	-3.8	1.15 V	280	42.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

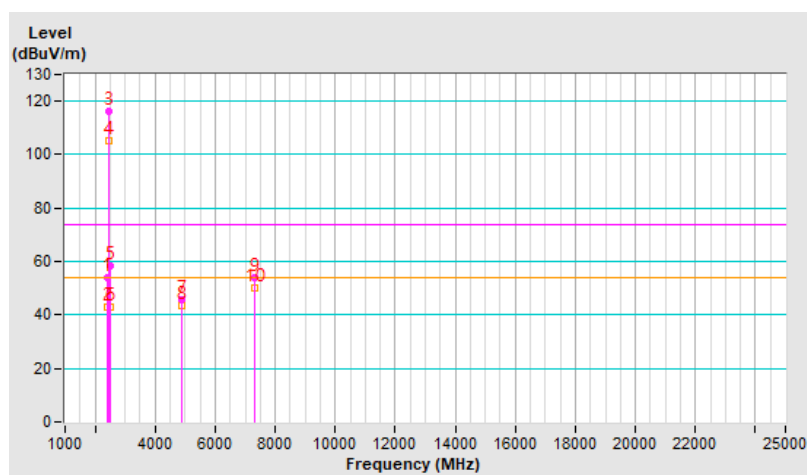


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.3 PK			1.87 H	128	120.8	-3.5
2	*2462.00	107.1 AV			1.87 H	128	110.6	-3.5
3	2483.50	70.3 PK	74.0	-3.7	1.87 H	128	73.7	-3.4
4	2483.50	47.3 AV	54.0	-6.7	1.87 H	128	50.7	-3.4
5	4924.00	47.1 PK	74.0	-26.9	1.00 H	168	45.5	1.6
6	4924.00	45.7 AV	54.0	-8.3	1.00 H	168	44.1	1.6
7	7386.00	53.9 PK	74.0	-20.1	1.17 H	227	46.0	7.9
8	7386.00	50.2 AV	54.0	-3.8	1.17 H	227	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

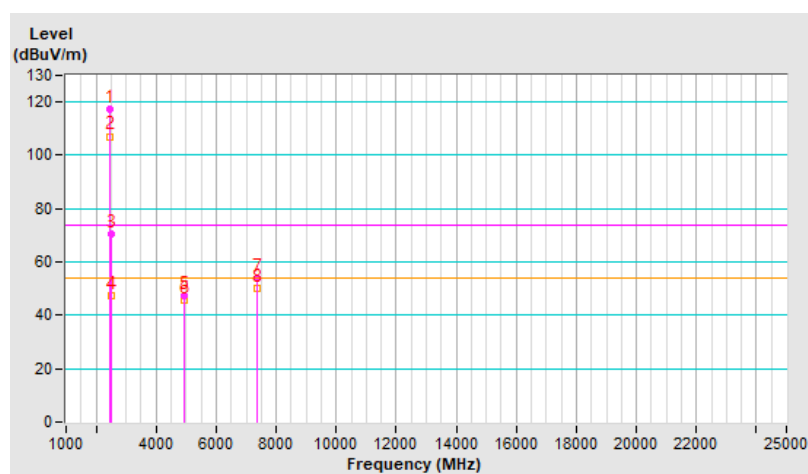


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.1 PK			2.62 V	196	119.6	-3.5
2	*2462.00	103.4 AV			2.62 V	196	106.9	-3.5
3	2483.50	64.2 PK	74.0	-9.8	2.62 V	196	67.6	-3.4
4	2483.50	44.1 AV	54.0	-9.9	2.62 V	196	47.5	-3.4
5	4924.00	45.8 PK	74.0	-28.2	1.00 V	206	44.2	1.6
6	4924.00	43.8 AV	54.0	-10.2	1.00 V	206	42.2	1.6
7	7386.00	53.7 PK	74.0	-20.3	1.19 V	287	45.8	7.9
8	7386.00	49.9 AV	54.0	-4.1	1.19 V	287	42.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

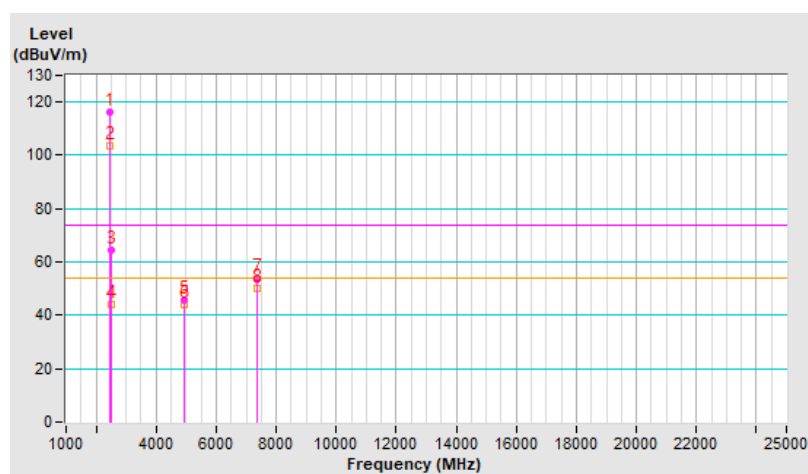


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.8 PK			1.84 H	119	120.2	-3.4
2	*2467.00	106.2 AV			1.84 H	119	109.6	-3.4
3	2483.50	71.3 PK	74.0	-2.7	1.84 H	119	74.7	-3.4
4	2483.50	48.0 AV	54.0	-6.0	1.84 H	119	51.4	-3.4
5	4934.00	47.3 PK	74.0	-26.7	1.05 H	190	45.7	1.6
6	4934.00	45.7 AV	54.0	-8.3	1.05 H	190	44.1	1.6
7	7401.00	54.2 PK	74.0	-19.8	1.12 H	213	46.3	7.9
8	7401.00	50.5 AV	54.0	-3.5	1.12 H	213	42.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

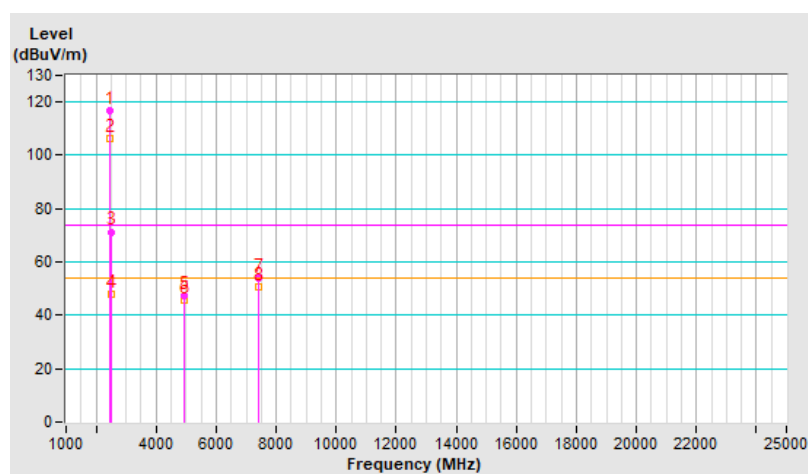


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.3 PK			2.62 V	220	115.7	-3.4
2	*2467.00	100.9 AV			2.62 V	220	104.3	-3.4
3	2483.50	71.6 PK	74.0	-2.4	2.62 V	220	75.0	-3.4
4	2483.50	43.2 AV	54.0	-10.8	2.62 V	220	46.6	-3.4
5	4934.00	45.5 PK	74.0	-28.5	1.00 V	197	43.9	1.6
6	4934.00	44.0 AV	54.0	-10.0	1.00 V	197	42.4	1.6
7	7401.00	54.6 PK	74.0	-19.4	1.22 V	286	46.7	7.9
8	7401.00	50.3 AV	54.0	-3.7	1.22 V	286	42.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

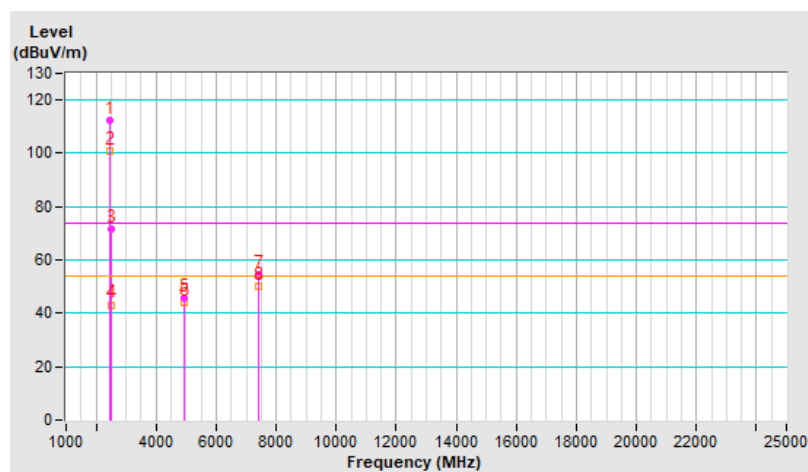


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.9 PK			1.85 H	111	115.3	-3.4
2	*2472.00	100.6 AV			1.85 H	111	104.0	-3.4
3	2483.50	71.3 PK	74.0	-2.7	1.85 H	111	74.7	-3.4
4	2483.50	44.5 AV	54.0	-9.5	1.85 H	111	47.9	-3.4
5	4944.00	47.4 PK	74.0	-26.6	1.01 H	166	45.8	1.6
6	4944.00	46.1 AV	54.0	-7.9	1.01 H	166	44.5	1.6
7	7416.00	55.1 PK	74.0	-18.9	1.15 H	217	47.3	7.8
8	7416.00	51.1 AV	54.0	-2.9	1.15 H	217	43.3	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

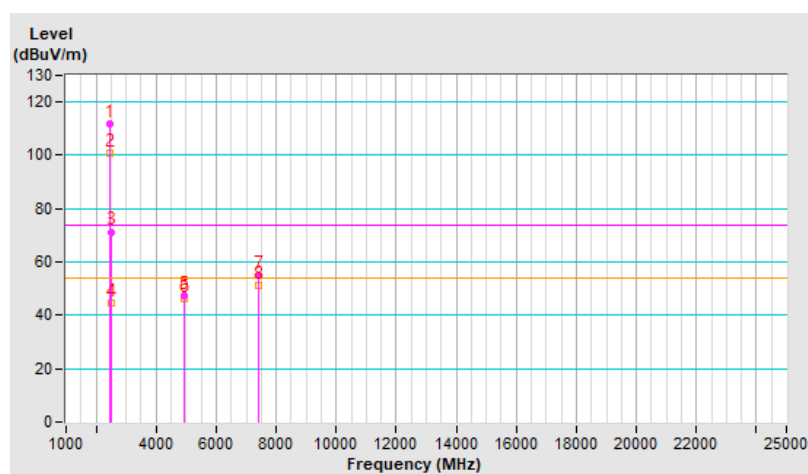


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.4 PK			2.72 V	212	113.8	-3.4
2	*2472.00	98.2 AV			2.72 V	212	101.6	-3.4
3	2483.50	57.8 PK	74.0	-16.2	2.72 V	212	61.2	-3.4
4	2483.50	44.2 AV	54.0	-9.8	2.72 V	212	47.6	-3.4
5	4944.00	45.8 PK	74.0	-28.2	1.01 V	189	44.2	1.6
6	4944.00	44.3 AV	54.0	-9.7	1.01 V	189	42.7	1.6
7	7416.00	54.5 PK	74.0	-19.5	1.22 V	291	46.7	7.8
8	7416.00	50.5 AV	54.0	-3.5	1.22 V	291	42.7	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

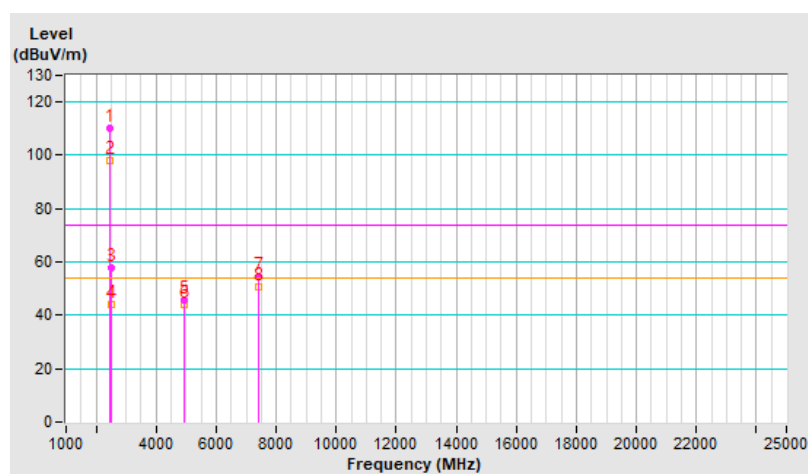


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	1.79 H	100	65.1	-3.6
2	2390.00	43.8 AV	54.0	-10.2	1.79 H	100	47.4	-3.6
3	*2412.00	112.2 PK			1.79 H	100	115.7	-3.5
4	*2412.00	100.5 AV			1.79 H	100	104.0	-3.5
5	4824.00	47.4 PK	74.0	-26.6	1.05 H	166	45.7	1.7
6	4824.00	45.9 AV	54.0	-8.1	1.05 H	166	44.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

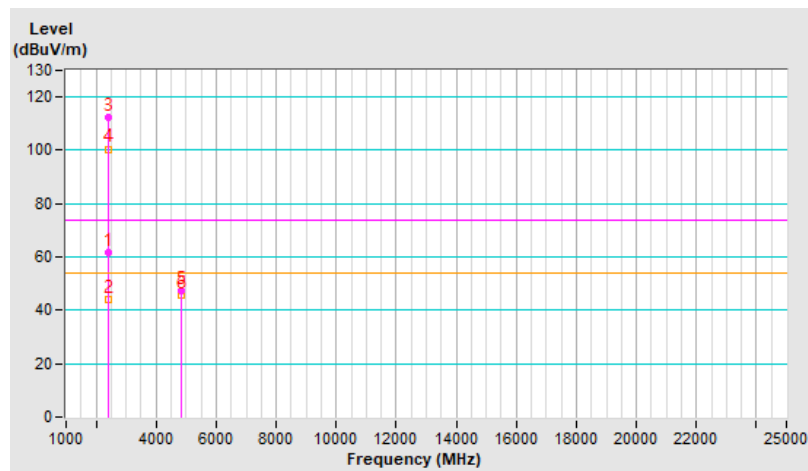


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.6 PK	74.0	-9.4	2.67 V	214	68.2	-3.6
2	2390.00	43.3 AV	54.0	-10.7	2.67 V	214	46.9	-3.6
3	*2412.00	109.7 PK			2.67 V	214	113.2	-3.5
4	*2412.00	97.7 AV			2.67 V	214	101.2	-3.5
5	4824.00	45.6 PK	74.0	-28.4	1.00 V	201	43.9	1.7
6	4824.00	43.9 AV	54.0	-10.1	1.00 V	201	42.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

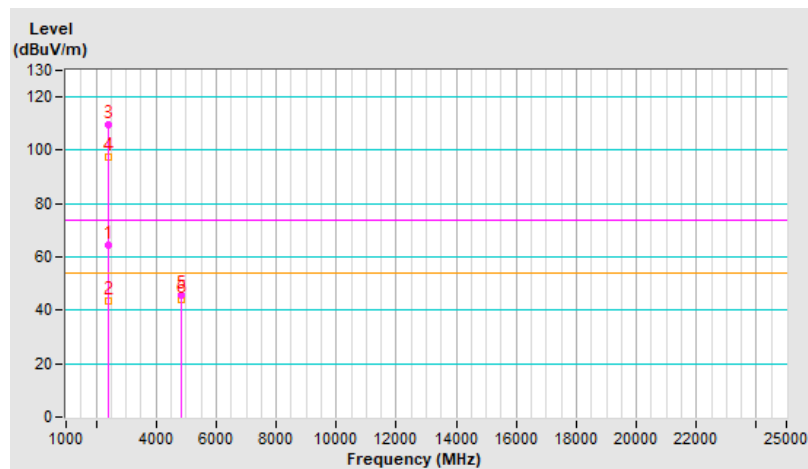


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	1.79 H	112	64.0	-3.6
2	2390.00	42.5 AV	54.0	-11.5	1.79 H	112	46.1	-3.6
3	*2437.00	120.1 PK			1.79 H	112	123.6	-3.5
4	*2437.00	108.5 AV			1.79 H	112	112.0	-3.5
5	2483.50	62.4 PK	74.0	-11.6	1.79 H	112	65.8	-3.4
6	2483.50	42.6 AV	54.0	-11.4	1.79 H	112	46.0	-3.4
7	4874.00	47.1 PK	74.0	-26.9	1.07 H	166	45.6	1.5
8	4874.00	45.9 AV	54.0	-8.1	1.07 H	166	44.4	1.5
9	7311.00	54.6 PK	74.0	-19.4	1.20 H	216	47.0	7.6
10	7311.00	50.5 AV	54.0	-3.5	1.20 H	216	42.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

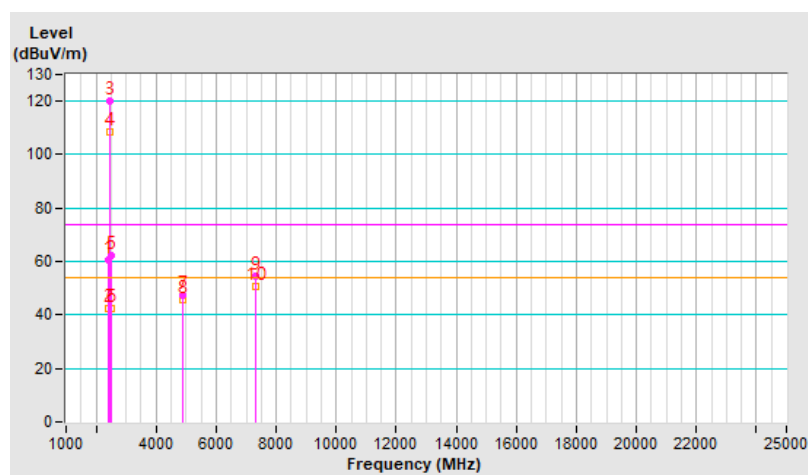


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	2.63 V	213	62.9	-3.6
2	2390.00	42.9 AV	54.0	-11.1	2.63 V	213	46.5	-3.6
3	*2437.00	118.3 PK			2.63 V	213	121.8	-3.5
4	*2437.00	106.2 AV			2.63 V	213	109.7	-3.5
5	2483.50	61.4 PK	74.0	-12.6	2.63 V	213	64.8	-3.4
6	2483.50	42.1 AV	54.0	-11.9	2.63 V	213	45.5	-3.4
7	4874.00	45.6 PK	74.0	-28.4	1.00 V	209	44.1	1.5
8	4874.00	44.0 AV	54.0	-10.0	1.00 V	209	42.5	1.5
9	7311.00	54.2 PK	74.0	-19.8	1.19 V	297	46.6	7.6
10	7311.00	50.0 AV	54.0	-4.0	1.19 V	297	42.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

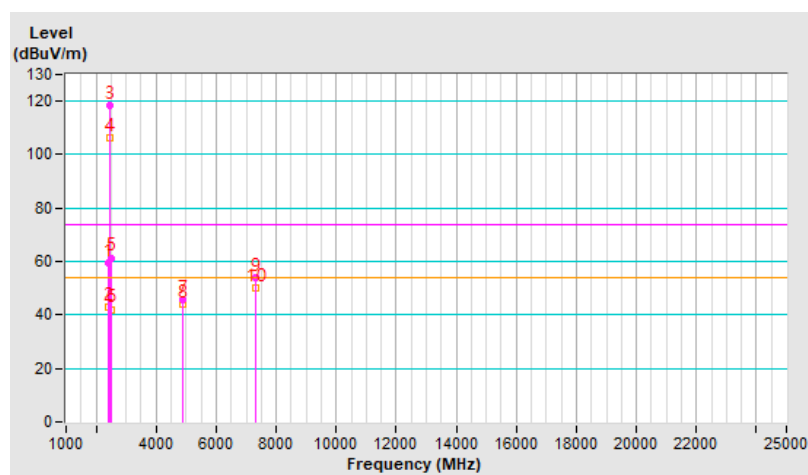


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.2 PK			1.79 H	100	119.7	-3.5
2	*2462.00	104.3 AV			1.79 H	100	107.8	-3.5
3	2483.50	69.1 PK	74.0	-4.9	1.79 H	100	72.5	-3.4
4	2483.50	48.1 AV	54.0	-5.9	1.79 H	100	51.5	-3.4
5	4924.00	48.0 PK	74.0	-26.0	1.06 H	193	46.4	1.6
6	4924.00	46.4 AV	54.0	-7.6	1.06 H	193	44.8	1.6
7	7386.00	54.5 PK	74.0	-19.5	1.19 H	203	46.6	7.9
8	7386.00	51.0 AV	54.0	-3.0	1.19 H	203	43.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

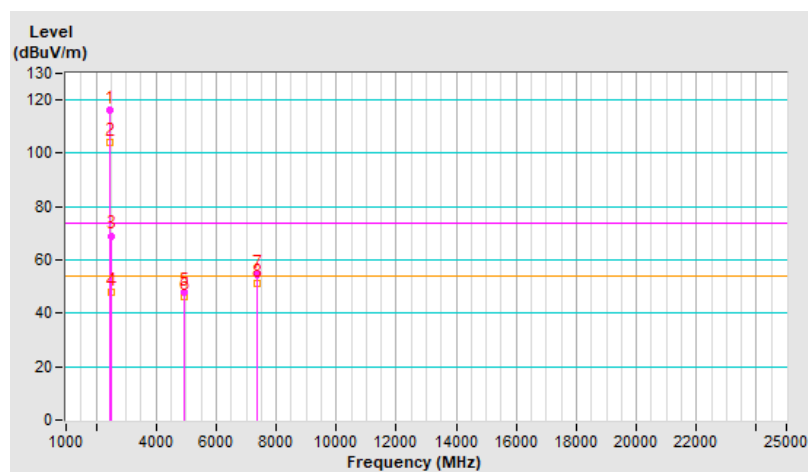


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.5 PK			2.72 V	220	116.0	-3.5
2	*2462.00	100.6 AV			2.72 V	220	104.1	-3.5
3	2483.50	71.3 PK	74.0	-2.7	2.72 V	220	74.7	-3.4
4	2483.50	47.3 AV	54.0	-6.7	2.72 V	220	50.7	-3.4
5	4924.00	45.1 PK	74.0	-28.9	1.00 V	188	43.5	1.6
6	4924.00	43.3 AV	54.0	-10.7	1.00 V	188	41.7	1.6
7	7386.00	54.6 PK	74.0	-19.4	1.18 V	285	46.7	7.9
8	7386.00	50.5 AV	54.0	-3.5	1.18 V	285	42.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

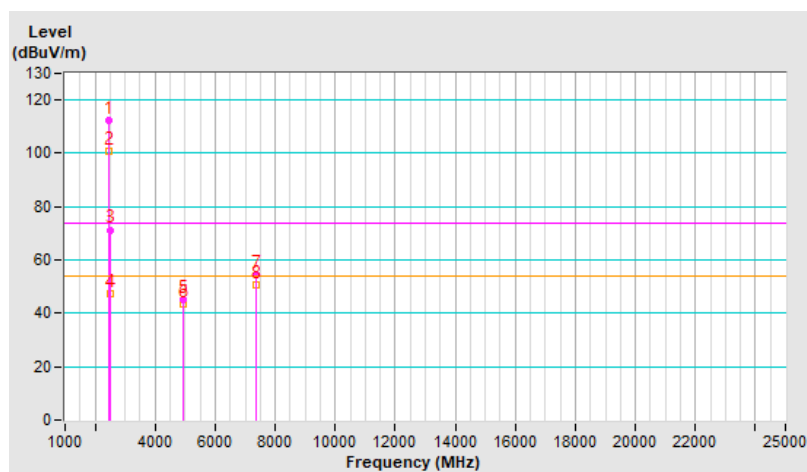


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.8 PK			1.82 H	101	120.2	-3.4
2	*2467.00	103.8 AV			1.82 H	101	107.2	-3.4
3	2483.50	65.2 PK	74.0	-8.8	1.82 H	101	68.6	-3.4
4	2483.50	46.8 AV	54.0	-7.2	1.82 H	101	50.2	-3.4
5	4934.00	47.8 PK	74.0	-26.2	1.03 H	176	46.2	1.6
6	4934.00	46.5 AV	54.0	-7.5	1.03 H	176	44.9	1.6
7	7401.00	53.9 PK	74.0	-20.1	1.20 H	228	46.0	7.9
8	7401.00	50.3 AV	54.0	-3.7	1.20 H	228	42.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

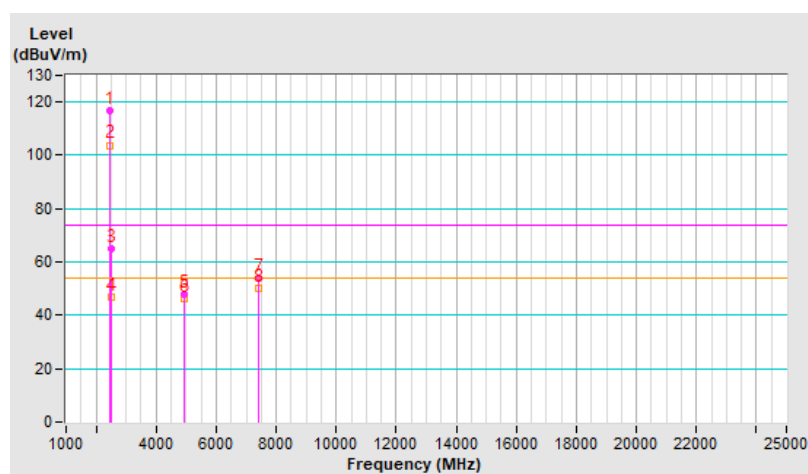


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.3 PK			2.67 V	222	116.7	-3.4
2	*2467.00	101.3 AV			2.67 V	222	104.7	-3.4
3	2483.50	62.3 PK	74.0	-11.7	2.67 V	222	65.7	-3.4
4	2483.50	46.0 AV	54.0	-8.0	2.67 V	222	49.4	-3.4
5	4934.00	46.0 PK	74.0	-28.0	1.00 V	208	44.4	1.6
6	4934.00	44.3 AV	54.0	-9.7	1.00 V	208	42.7	1.6
7	7401.00	54.1 PK	74.0	-19.9	1.24 V	280	46.2	7.9
8	7401.00	50.1 AV	54.0	-3.9	1.24 V	280	42.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

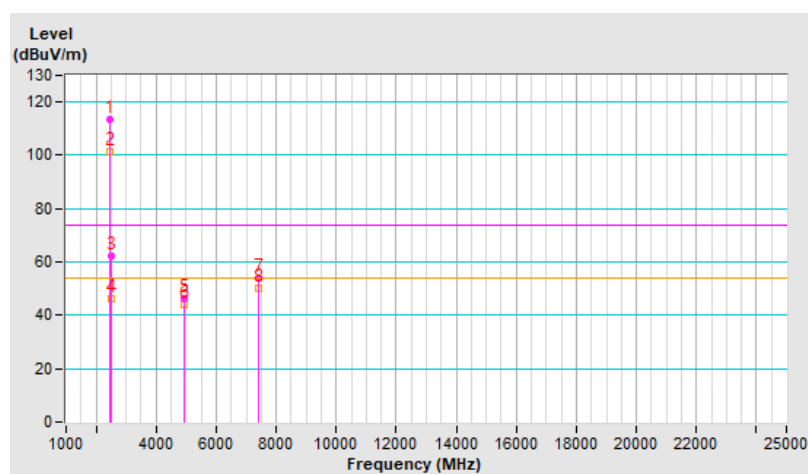


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.6 PK			1.81 H	121	116.0	-3.4
2	*2472.00	100.2 AV			1.81 H	121	103.6	-3.4
3	2483.50	61.2 PK	74.0	-12.8	1.81 H	121	64.6	-3.4
4	2483.50	51.2 AV	54.0	-2.8	1.81 H	121	54.6	-3.4
5	4944.00	47.0 PK	74.0	-27.0	1.01 H	195	45.4	1.6
6	4944.00	45.8 AV	54.0	-8.2	1.01 H	195	44.2	1.6
7	7416.00	54.8 PK	74.0	-19.2	1.10 H	202	47.0	7.8
8	7416.00	50.8 AV	54.0	-3.2	1.10 H	202	43.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

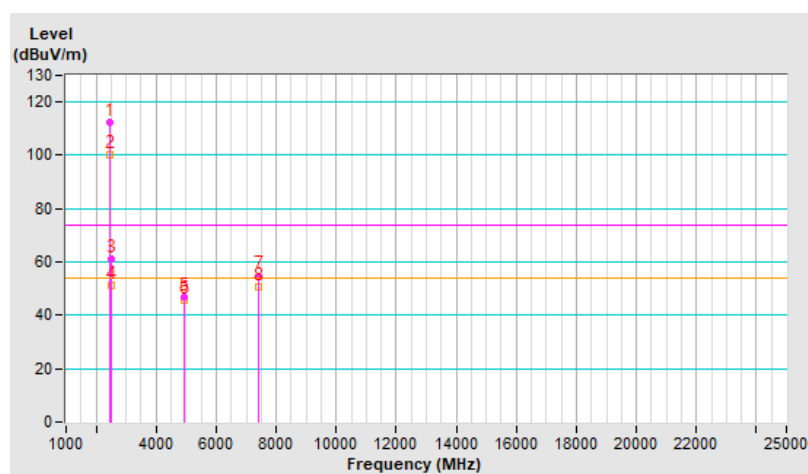


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.9 PK			2.73 V	194	112.3	-3.4
2	*2472.00	97.1 AV			2.73 V	194	100.5	-3.4
3	2483.50	62.1 PK	74.0	-11.9	2.73 V	194	65.5	-3.4
4	2483.50	45.3 AV	54.0	-8.7	2.73 V	194	48.7	-3.4
5	4944.00	46.2 PK	74.0	-27.8	1.00 V	217	44.6	1.6
6	4944.00	44.2 AV	54.0	-9.8	1.00 V	217	42.6	1.6
7	7416.00	54.1 PK	74.0	-19.9	1.20 V	286	46.3	7.8
8	7416.00	50.0 AV	54.0	-4.0	1.20 V	286	42.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

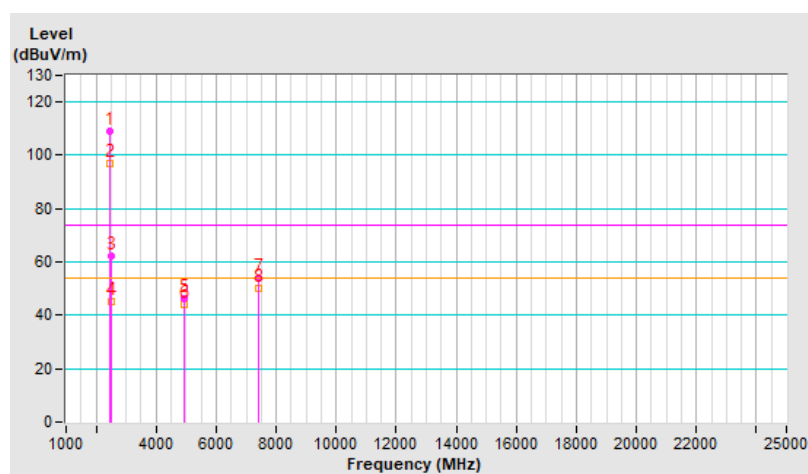


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.9 PK	74.0	-10.1	1.86 H	112	67.5	-3.6
2	2390.00	46.3 AV	54.0	-7.7	1.86 H	112	49.9	-3.6
3	*2412.00	112.2 PK			1.86 H	112	115.7	-3.5
4	*2412.00	99.6 AV			1.86 H	112	103.1	-3.5
5	4824.00	47.3 PK	74.0	-26.7	1.00 H	159	45.6	1.7
6	4824.00	45.6 AV	54.0	-8.4	1.00 H	159	43.9	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

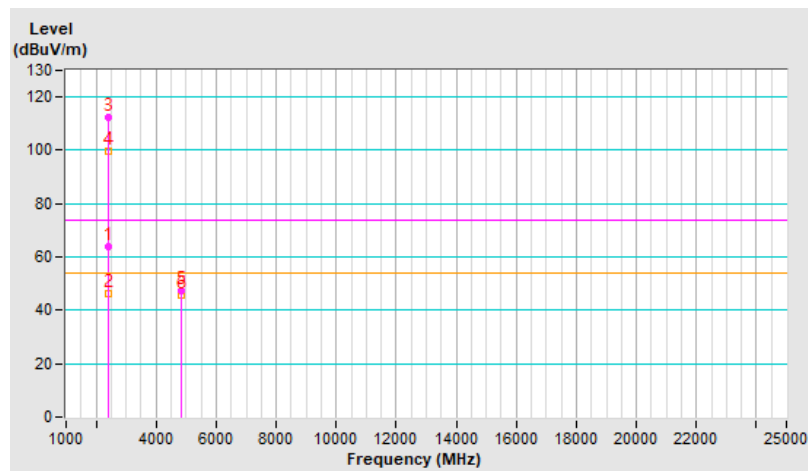


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	2.63 V	197	68.8	-3.6
2	2390.00	45.3 AV	54.0	-8.7	2.63 V	197	48.9	-3.6
3	*2412.00	108.5 PK			2.63 V	197	112.0	-3.5
4	*2412.00	96.1 AV			2.63 V	197	99.6	-3.5
5	4824.00	45.6 PK	74.0	-28.4	1.00 V	195	43.9	1.7
6	4824.00	43.8 AV	54.0	-10.2	1.00 V	195	42.1	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

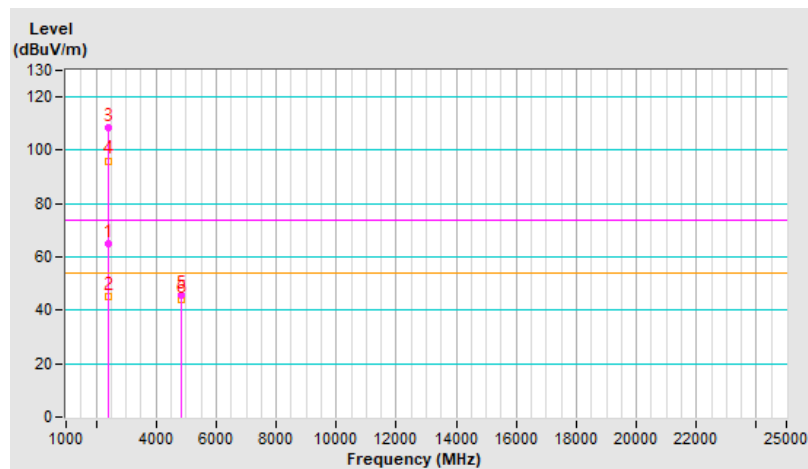


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.84 H	117	69.7	-3.6
2	2390.00	45.8 AV	54.0	-8.2	1.84 H	117	49.4	-3.6
3	*2437.00	115.8 PK			1.84 H	117	119.3	-3.5
4	*2437.00	103.7 AV			1.84 H	117	107.2	-3.5
5	2483.50	59.2 PK	74.0	-14.8	1.84 H	117	62.6	-3.4
6	2483.50	43.0 AV	54.0	-11.0	1.84 H	117	46.4	-3.4
7	4874.00	47.7 PK	74.0	-26.3	1.04 H	186	46.2	1.5
8	4874.00	46.3 AV	54.0	-7.7	1.04 H	186	44.8	1.5
9	7311.00	55.0 PK	74.0	-19.0	1.20 H	222	47.4	7.6
10	7311.00	50.9 AV	54.0	-3.1	1.20 H	222	43.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

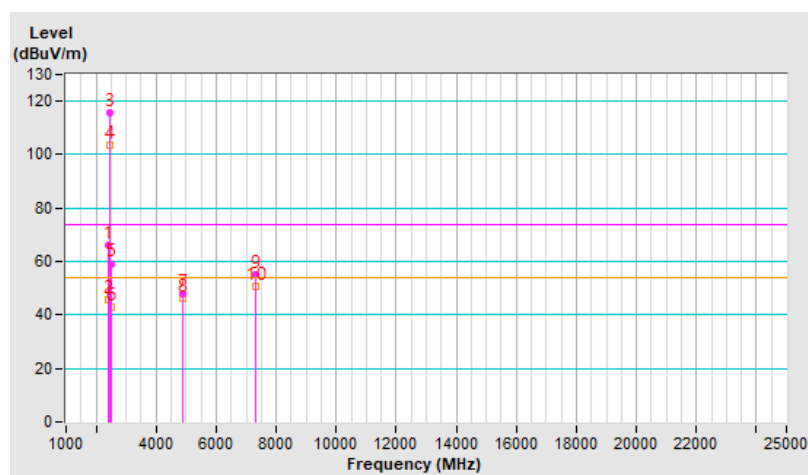


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.2 PK	74.0	-9.8	2.62 V	193	67.8	-3.6
2	2390.00	44.3 AV	54.0	-9.7	2.62 V	193	47.9	-3.6
3	*2437.00	112.6 PK			2.62 V	193	116.1	-3.5
4	*2437.00	101.3 AV			2.62 V	193	104.8	-3.5
5	2483.50	57.6 PK	74.0	-16.4	2.62 V	193	61.0	-3.4
6	2483.50	43.2 AV	54.0	-10.8	2.62 V	193	46.6	-3.4
7	4874.00	46.0 PK	74.0	-28.0	1.00 V	202	44.5	1.5
8	4874.00	44.1 AV	54.0	-9.9	1.00 V	202	42.6	1.5
9	7311.00	54.0 PK	74.0	-20.0	1.18 V	299	46.4	7.6
10	7311.00	49.6 AV	54.0	-4.4	1.18 V	299	42.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

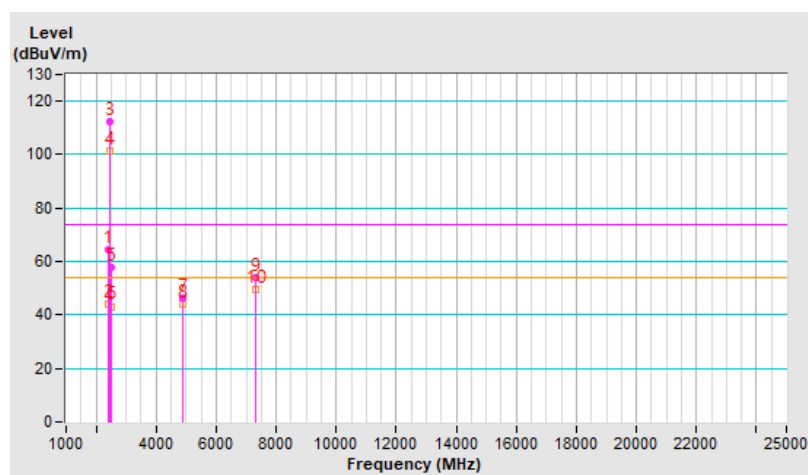


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.3 PK			1.88 H	108	115.8	-3.5
2	*2462.00	99.4 AV			1.88 H	108	102.9	-3.5
3	2483.50	60.7 PK	74.0	-13.3	1.88 H	108	64.1	-3.4
4	2483.50	44.8 AV	54.0	-9.2	1.88 H	108	48.2	-3.4
5	4924.00	47.3 PK	74.0	-26.7	1.01 H	162	45.7	1.6
6	4924.00	45.7 AV	54.0	-8.3	1.01 H	162	44.1	1.6
7	7386.00	54.5 PK	74.0	-19.5	1.17 H	233	46.6	7.9
8	7386.00	50.7 AV	54.0	-3.3	1.17 H	233	42.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

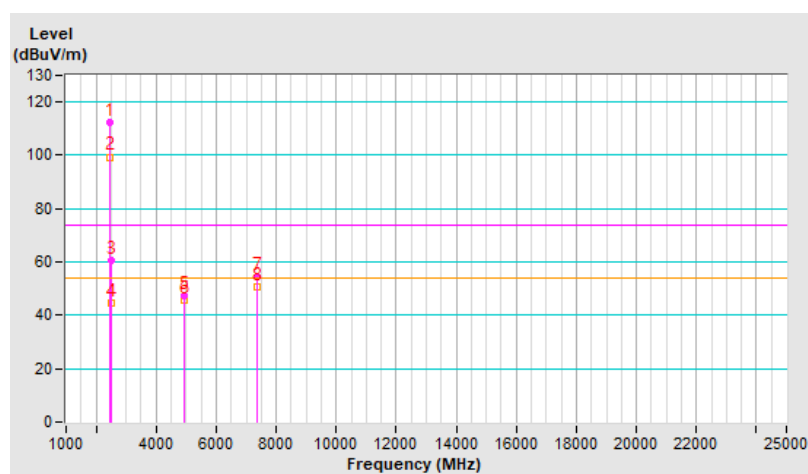


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.3 PK			2.61 V	221	113.8	-3.5
2	*2462.00	96.5 AV			2.61 V	221	100.0	-3.5
3	2483.50	68.1 PK	74.0	-5.9	2.61 V	221	71.5	-3.4
4	2483.50	46.2 AV	54.0	-7.8	2.61 V	221	49.6	-3.4
5	4924.00	45.4 PK	74.0	-28.6	1.00 V	216	43.8	1.6
6	4924.00	43.8 AV	54.0	-10.2	1.00 V	216	42.2	1.6
7	7386.00	53.9 PK	74.0	-20.1	1.22 V	306	46.0	7.9
8	7386.00	49.9 AV	54.0	-4.1	1.22 V	306	42.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

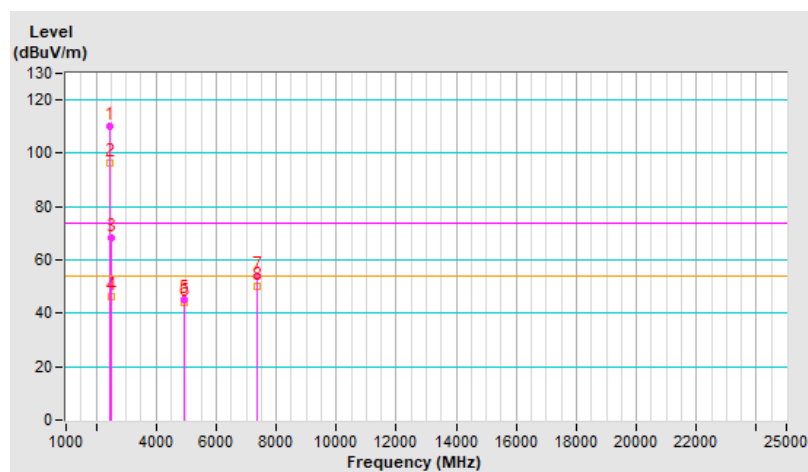


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.2 PK			1.88 H	113	114.6	-3.4
2	*2467.00	98.4 AV			1.88 H	113	101.8	-3.4
3	2483.50	60.0 PK	74.0	-14.0	1.88 H	113	63.4	-3.4
4	2483.50	44.3 AV	54.0	-9.7	1.88 H	113	47.7	-3.4
5	4934.00	47.4 PK	74.0	-26.6	1.02 H	173	45.8	1.6
6	4934.00	45.6 AV	54.0	-8.4	1.02 H	173	44.0	1.6
7	7401.00	54.6 PK	74.0	-19.4	1.19 H	230	46.7	7.9
8	7401.00	50.6 AV	54.0	-3.4	1.19 H	230	42.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

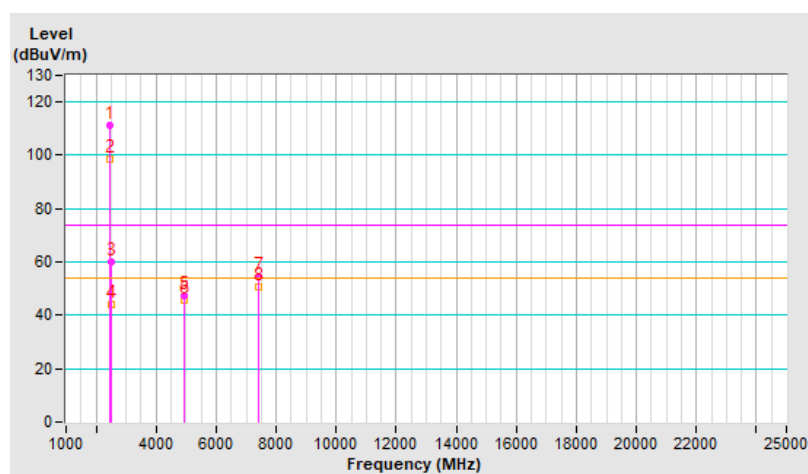


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.1 PK			2.63 V	203	111.5	-3.4
2	*2467.00	96.0 AV			2.63 V	203	99.4	-3.4
3	2483.50	70.1 PK	74.0	-3.9	2.63 V	203	73.5	-3.4
4	2483.50	46.3 AV	54.0	-7.7	2.63 V	203	49.7	-3.4
5	4934.00	46.0 PK	74.0	-28.0	1.00 V	211	44.4	1.6
6	4934.00	44.1 AV	54.0	-9.9	1.00 V	211	42.5	1.6
7	7401.00	53.9 PK	74.0	-20.1	1.21 V	301	46.0	7.9
8	7401.00	49.7 AV	54.0	-4.3	1.21 V	301	41.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

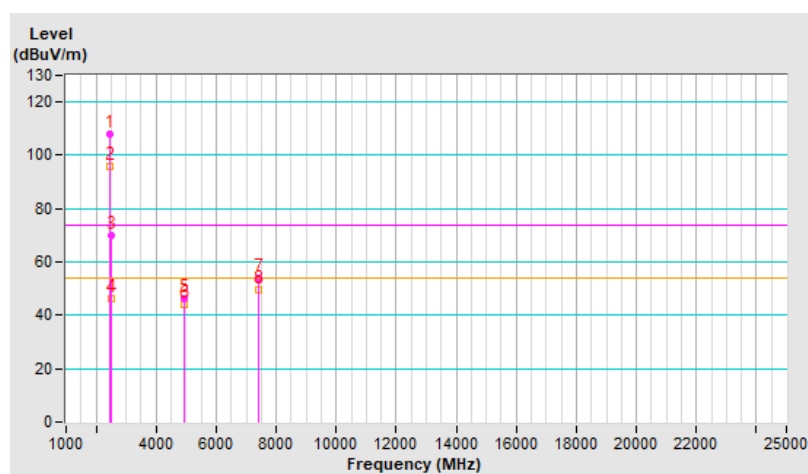


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.4 PK			1.83 H	124	111.8	-3.4
2	*2472.00	96.5 AV			1.83 H	124	99.9	-3.4
3	2483.50	60.5 PK	74.0	-13.5	1.83 H	124	63.9	-3.4
4	2483.50	46.5 AV	54.0	-7.5	1.83 H	124	49.9	-3.4
5	4944.00	48.2 PK	74.0	-25.8	1.02 H	184	46.6	1.6
6	4944.00	46.4 AV	54.0	-7.6	1.02 H	184	44.8	1.6
7	7416.00	54.9 PK	74.0	-19.1	1.18 H	208	47.1	7.8
8	7416.00	51.0 AV	54.0	-3.0	1.18 H	208	43.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

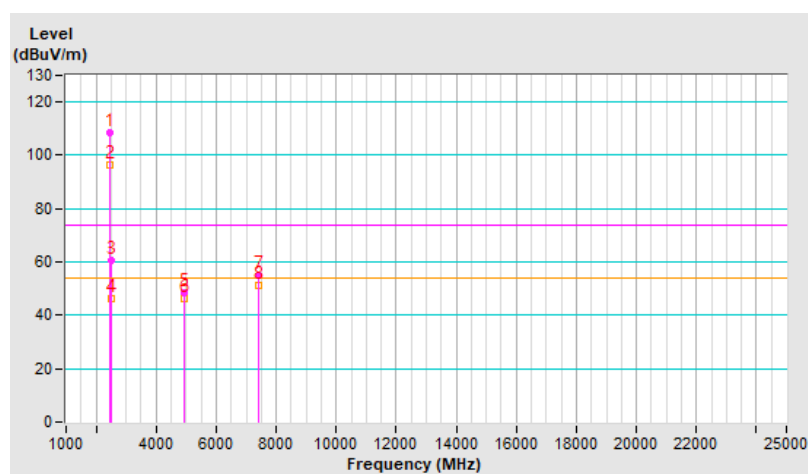


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.7 PK			2.71 V	192	110.1	-3.4
2	*2472.00	94.5 AV			2.71 V	192	97.9	-3.4
3	2483.50	59.3 PK	74.0	-14.7	2.71 V	192	62.7	-3.4
4	2483.50	46.4 AV	54.0	-7.6	2.71 V	192	49.8	-3.4
5	4944.00	45.8 PK	74.0	-28.2	1.00 V	199	44.2	1.6
6	4944.00	43.8 AV	54.0	-10.2	1.00 V	199	42.2	1.6
7	7416.00	53.9 PK	74.0	-20.1	1.22 V	297	46.1	7.8
8	7416.00	50.0 AV	54.0	-4.0	1.22 V	297	42.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

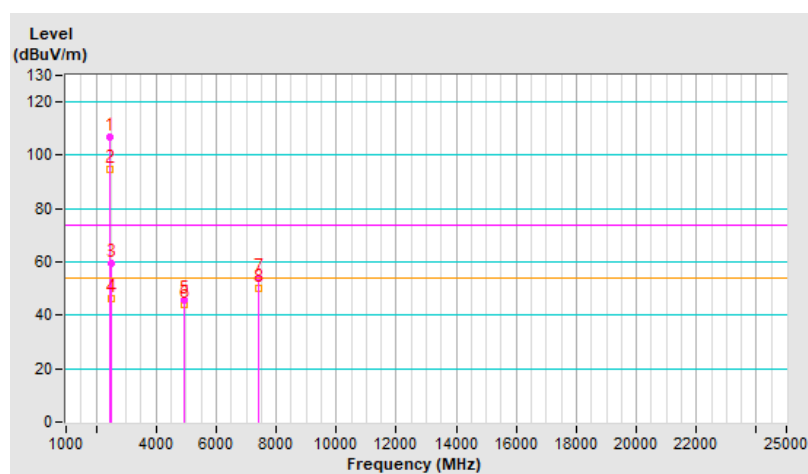


2Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.89 H	132	61.3	-3.6
2	2390.00	50.4 AV	54.0	-3.6	1.89 H	132	54.0	-3.6
3	*2412.00	108.2 PK			1.89 H	132	111.7	-3.5
4	*2412.00	105.7 AV			1.89 H	132	109.2	-3.5
5	4824.00	47.8 PK	74.0	-26.2	1.05 H	170	46.1	1.7
6	4824.00	46.1 AV	54.0	-7.9	1.05 H	170	44.4	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

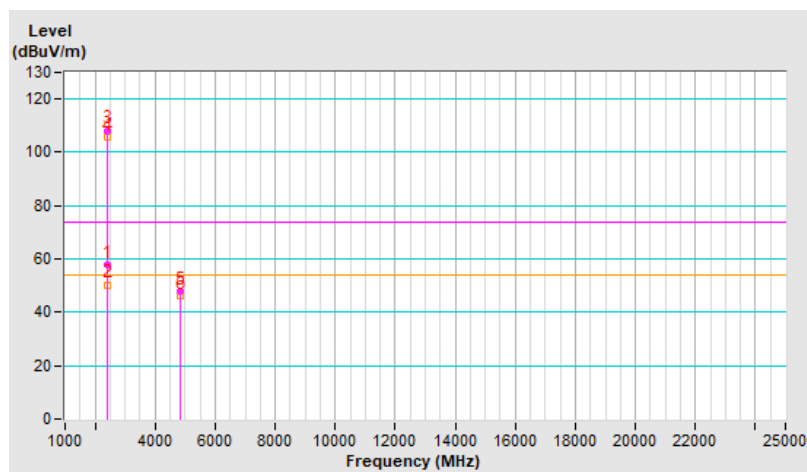


RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	2.15 V	196	61.0	-3.6
2	2390.00	44.8 AV	54.0	-9.2	2.15 V	196	48.4	-3.6
3	*2412.00	105.2 PK			2.15 V	196	108.7	-3.5
4	*2412.00	102.7 AV			2.15 V	196	106.2	-3.5
5	4824.00	46.7 PK	74.0	-27.3	1.04 V	193	45.0	1.7
6	4824.00	44.4 AV	54.0	-9.6	1.04 V	193	42.7	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

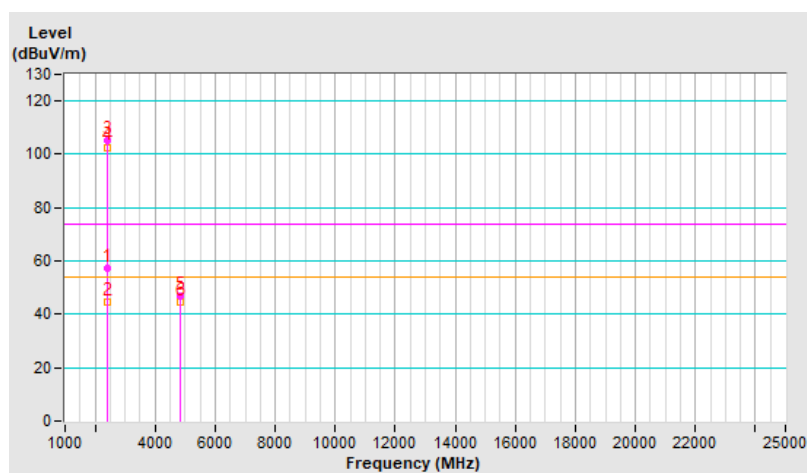


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.89 H	148	59.5	-3.6
2	2390.00	43.5 AV	54.0	-10.5	1.89 H	148	47.1	-3.6
3	*2437.00	112.4 PK			1.89 H	148	115.9	-3.5
4	*2437.00	110.2 AV			1.89 H	148	113.7	-3.5
5	2483.50	54.9 PK	74.0	-19.1	1.89 H	148	58.3	-3.4
6	2483.50	45.3 AV	54.0	-8.7	1.89 H	148	48.7	-3.4
7	4874.00	47.5 PK	74.0	-26.5	1.01 H	181	46.0	1.5
8	4874.00	46.0 AV	54.0	-8.0	1.01 H	181	44.5	1.5
9	7311.00	54.5 PK	74.0	-19.5	1.15 H	216	46.9	7.6
10	7311.00	50.7 AV	54.0	-3.3	1.15 H	216	43.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

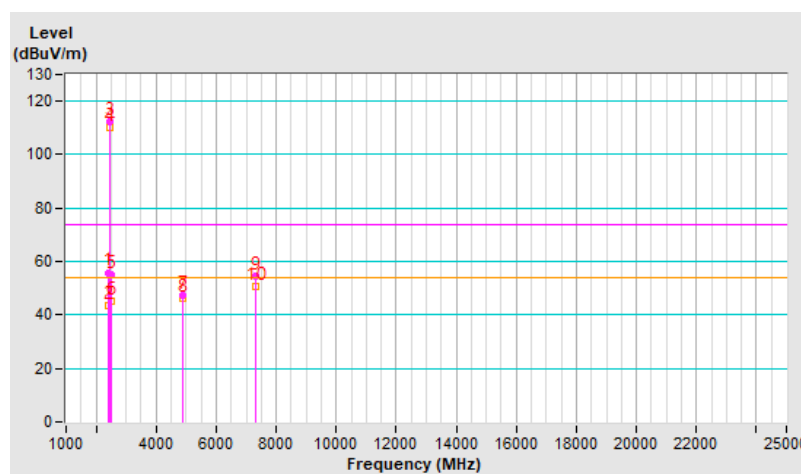


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.0 PK	74.0	-19.0	2.16 V	195	58.6	-3.6
2	2390.00	43.6 AV	54.0	-10.4	2.16 V	195	47.2	-3.6
3	*2437.00	109.3 PK			2.16 V	195	112.8	-3.5
4	*2437.00	107.5 AV			2.16 V	195	111.0	-3.5
5	2483.50	54.8 PK	74.0	-19.2	2.16 V	195	58.2	-3.4
6	2483.50	44.5 AV	54.0	-9.5	2.16 V	195	47.9	-3.4
7	4874.00	45.6 PK	74.0	-28.4	1.00 V	203	44.1	1.5
8	4874.00	43.8 AV	54.0	-10.2	1.00 V	203	42.3	1.5
9	7311.00	54.2 PK	74.0	-19.8	1.20 V	293	46.6	7.6
10	7311.00	50.1 AV	54.0	-3.9	1.20 V	293	42.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

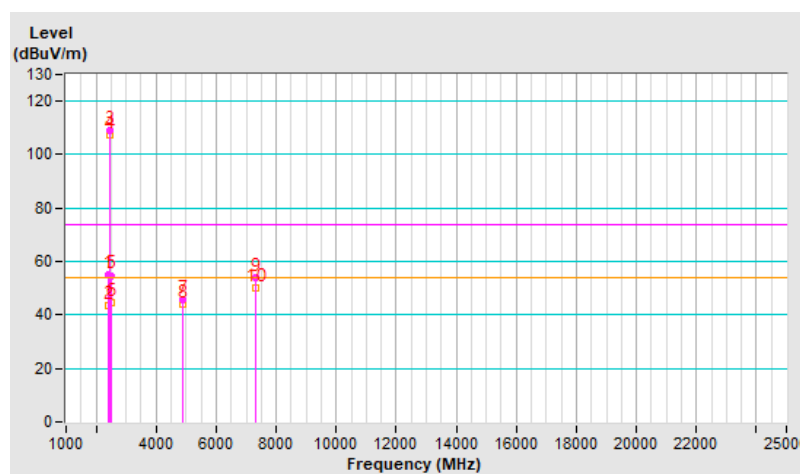


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.1 PK			1.87 H	140	109.6	-3.5
2	*2462.00	103.1 AV			1.87 H	140	106.6	-3.5
3	2483.50	58.2 PK	74.0	-15.8	1.87 H	140	61.6	-3.4
4	2483.50	50.8 AV	54.0	-3.2	1.87 H	140	54.2	-3.4
5	4924.00	47.4 PK	74.0	-26.6	1.10 H	159	45.8	1.6
6	4924.00	46.0 AV	54.0	-8.0	1.10 H	159	44.4	1.6
7	7386.00	54.1 PK	74.0	-19.9	1.15 H	218	46.2	7.9
8	7386.00	50.2 AV	54.0	-3.8	1.15 H	218	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

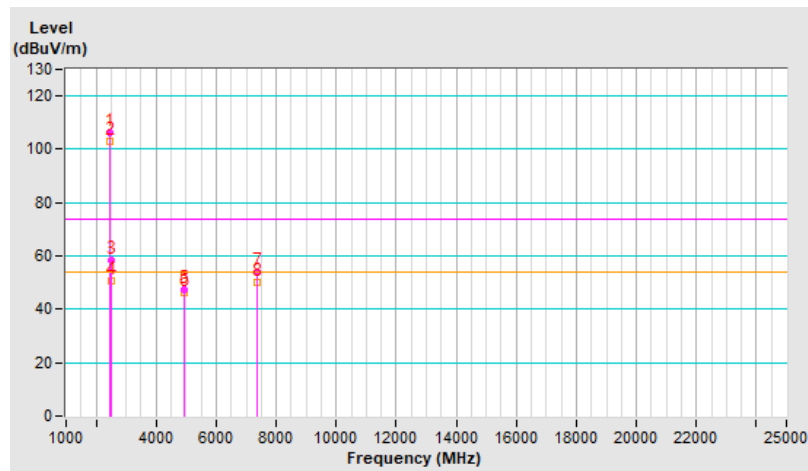


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.7 PK			2.14 V	195	105.2	-3.5
2	*2462.00	98.1 AV			2.14 V	195	101.6	-3.5
3	2483.50	55.2 PK	74.0	-18.8	2.14 V	195	58.6	-3.4
4	2483.50	49.5 AV	54.0	-4.5	2.14 V	195	52.9	-3.4
5	4924.00	46.3 PK	74.0	-27.7	1.00 V	204	44.7	1.6
6	4924.00	44.2 AV	54.0	-9.8	1.00 V	204	42.6	1.6
7	7386.00	54.6 PK	74.0	-19.4	1.17 V	315	46.7	7.9
8	7386.00	50.0 AV	54.0	-4.0	1.17 V	315	42.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

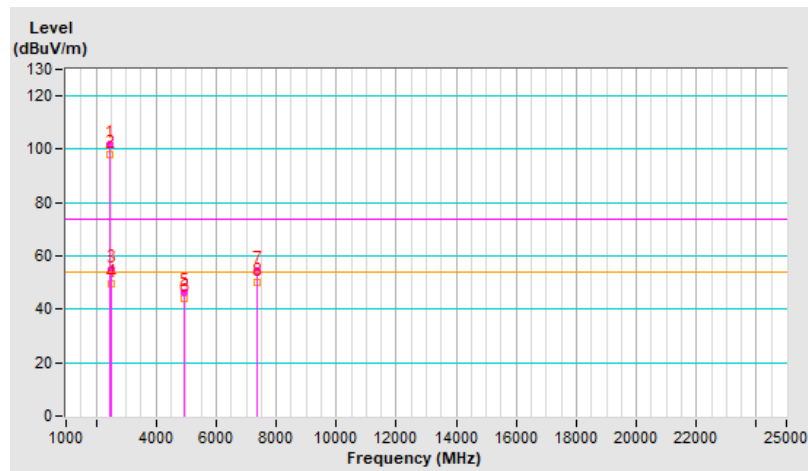


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	96.4 PK			1.88 H	129	99.8	-3.4
2	*2467.00	93.4 AV			1.88 H	129	96.8	-3.4
3	2483.50	56.4 PK	74.0	-17.6	1.88 H	129	59.8	-3.4
4	2483.50	45.3 AV	54.0	-8.7	1.88 H	129	48.7	-3.4
5	4934.00	46.8 PK	74.0	-27.2	1.09 H	175	45.2	1.6
6	4934.00	45.4 AV	54.0	-8.6	1.09 H	175	43.8	1.6
7	7401.00	54.2 PK	74.0	-19.8	1.15 H	231	46.3	7.9
8	7401.00	50.7 AV	54.0	-3.3	1.15 H	231	42.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

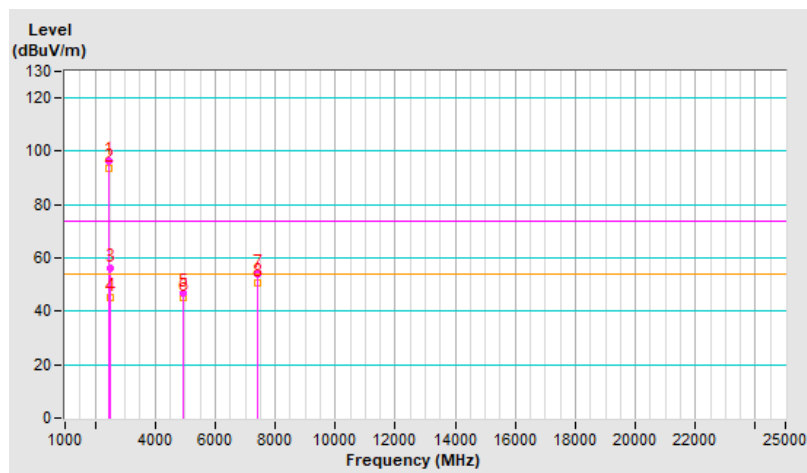


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	94.7 PK			2.11 V	196	98.1	-3.4
2	*2467.00	92.4 AV			2.11 V	196	95.8	-3.4
3	2483.50	56.1 PK	74.0	-17.9	2.11 V	196	59.5	-3.4
4	2483.50	44.9 AV	54.0	-9.1	2.11 V	196	48.3	-3.4
5	4934.00	45.7 PK	74.0	-28.3	1.00 V	206	44.1	1.6
6	4934.00	43.5 AV	54.0	-10.5	1.00 V	206	41.9	1.6
7	7401.00	54.3 PK	74.0	-19.7	1.20 V	318	46.4	7.9
8	7401.00	50.1 AV	54.0	-3.9	1.20 V	318	42.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

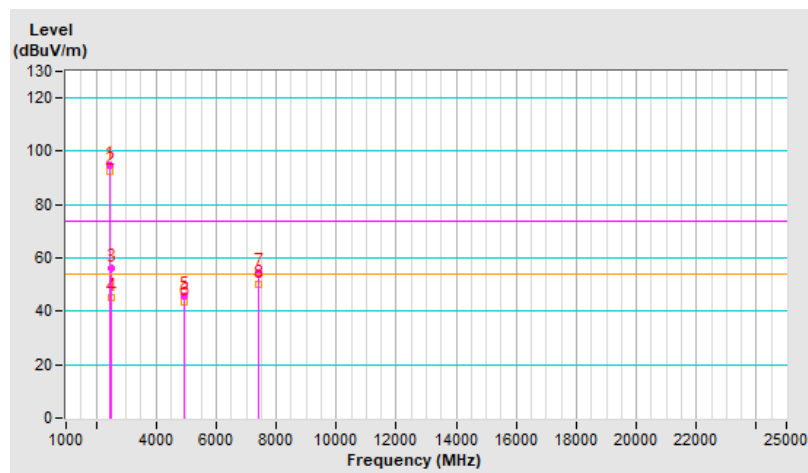


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	95.7 PK			1.87 H	143	99.1	-3.4
2	*2472.00	93.1 AV			1.87 H	143	96.5	-3.4
3	2483.50	57.2 PK	74.0	-16.8	1.87 H	143	60.6	-3.4
4	2483.50	46.1 AV	54.0	-7.9	1.87 H	143	49.5	-3.4
5	4944.00	47.8 PK	74.0	-26.2	1.10 H	165	46.2	1.6
6	4944.00	45.9 AV	54.0	-8.1	1.10 H	165	44.3	1.6
7	7416.00	54.2 PK	74.0	-19.8	1.11 H	233	46.4	7.8
8	7416.00	50.2 AV	54.0	-3.8	1.11 H	233	42.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

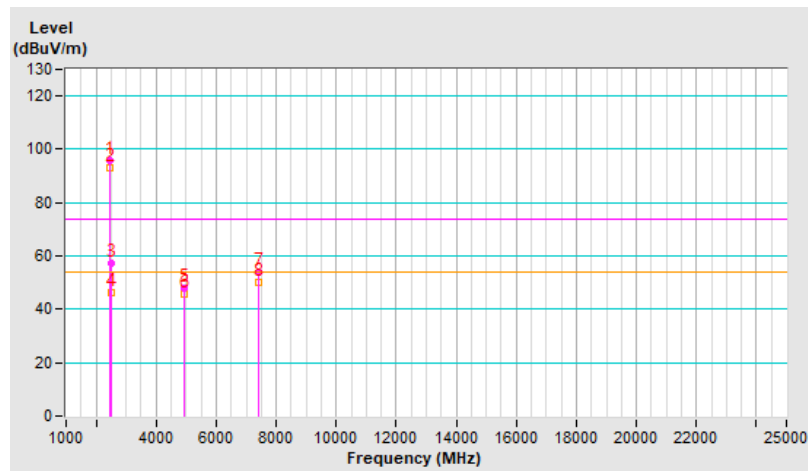


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	92.1 PK			2.16 V	192	95.5	-3.4
2	*2472.00	89.5 AV			2.16 V	192	92.9	-3.4
3	2483.50	55.9 PK	74.0	-18.1	2.16 V	192	59.3	-3.4
4	2483.50	45.4 AV	54.0	-8.6	2.16 V	192	48.8	-3.4
5	4944.00	45.8 PK	74.0	-28.2	1.00 V	222	44.2	1.6
6	4944.00	43.8 AV	54.0	-10.2	1.00 V	222	42.2	1.6
7	7416.00	54.1 PK	74.0	-19.9	1.19 V	307	46.3	7.8
8	7416.00	50.0 AV	54.0	-4.0	1.19 V	307	42.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

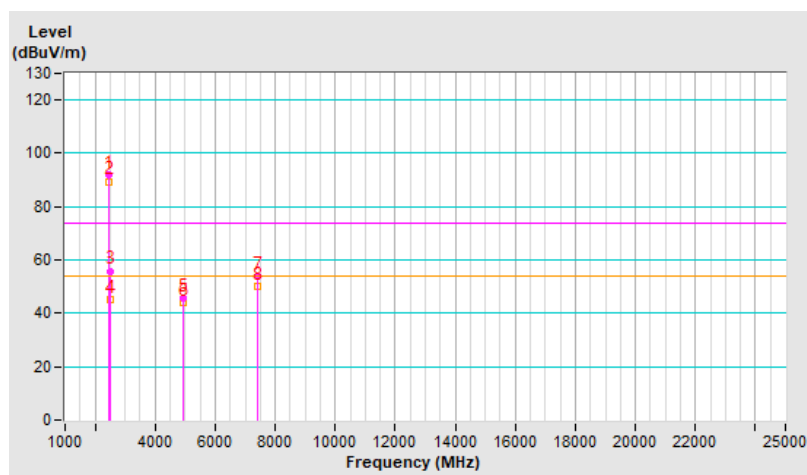


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.95 H	146	74.2	-3.6
2	2390.00	45.9 AV	54.0	-8.1	1.95 H	146	49.5	-3.6
3	*2412.00	109.3 PK			1.95 H	146	112.8	-3.5
4	*2412.00	99.7 AV			1.95 H	146	103.2	-3.5
5	4824.00	47.4 PK	74.0	-26.6	1.12 H	148	45.7	1.7
6	4824.00	45.9 AV	54.0	-8.1	1.12 H	148	44.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

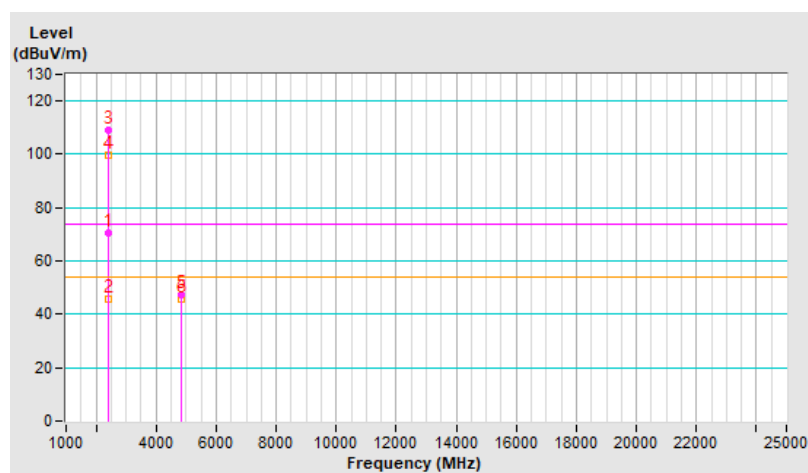


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	2.15 V	228	69.1	-3.6
2	2390.00	45.5 AV	54.0	-8.5	2.15 V	228	49.1	-3.6
3	*2412.00	105.1 PK			2.15 V	228	108.6	-3.5
4	*2412.00	96.4 AV			2.15 V	228	99.9	-3.5
5	4824.00	46.2 PK	74.0	-27.8	1.02 V	207	44.5	1.7
6	4824.00	43.9 AV	54.0	-10.1	1.02 V	207	42.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

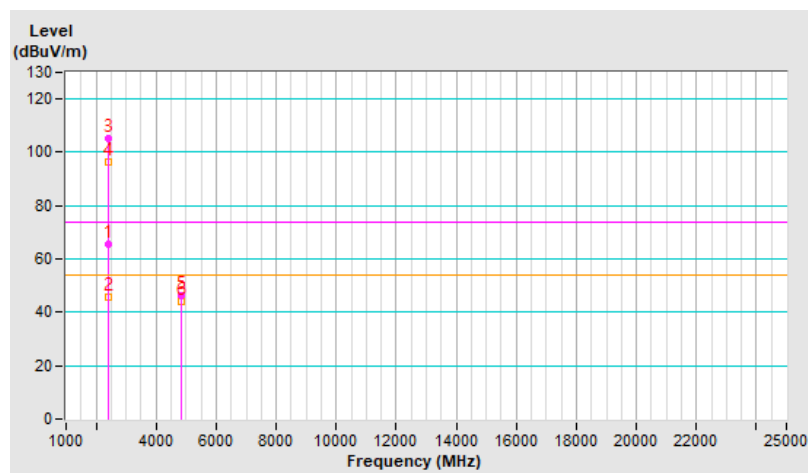


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	1.90 H	124	69.6	-3.6
2	2390.00	45.7 AV	54.0	-8.3	1.90 H	124	49.3	-3.6
3	*2437.00	114.8 PK			1.90 H	124	118.3	-3.5
4	*2437.00	105.6 AV			1.90 H	124	109.1	-3.5
5	2483.50	63.2 PK	74.0	-10.8	1.90 H	124	66.6	-3.4
6	2483.50	46.1 AV	54.0	-7.9	1.90 H	124	49.5	-3.4
7	4874.00	47.0 PK	74.0	-27.0	1.06 H	184	45.5	1.5
8	4874.00	45.4 AV	54.0	-8.6	1.06 H	184	43.9	1.5
9	7311.00	53.7 PK	74.0	-20.3	1.12 H	239	46.1	7.6
10	7311.00	50.1 AV	54.0	-3.9	1.12 H	239	42.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

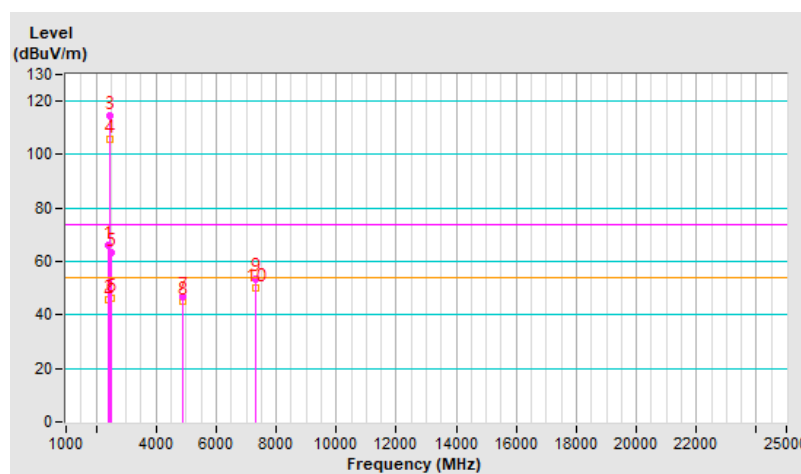


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.4 PK	74.0	-14.6	2.16 V	221	63.0	-3.6
2	2390.00	44.8 AV	54.0	-9.2	2.16 V	221	48.4	-3.6
3	*2437.00	111.0 PK			2.16 V	221	114.5	-3.5
4	*2437.00	102.1 AV			2.16 V	221	105.6	-3.5
5	2483.50	59.6 PK	74.0	-14.4	2.16 V	221	63.0	-3.4
6	2483.50	44.9 AV	54.0	-9.1	2.16 V	221	48.3	-3.4
7	4874.00	45.8 PK	74.0	-28.2	1.00 V	191	44.3	1.5
8	4874.00	43.8 AV	54.0	-10.2	1.00 V	191	42.3	1.5
9	7311.00	53.7 PK	74.0	-20.3	1.20 V	312	46.1	7.6
10	7311.00	49.5 AV	54.0	-4.5	1.20 V	312	41.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

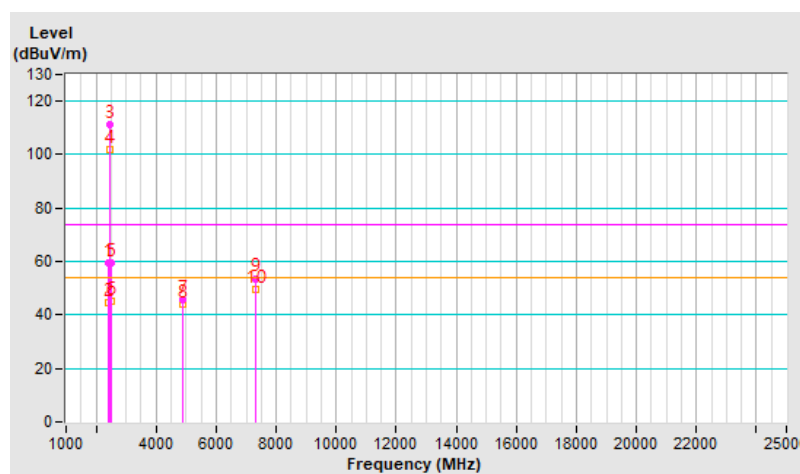


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.1 PK			1.84 H	136	114.6	-3.5
2	*2462.00	102.1 AV			1.84 H	136	105.6	-3.5
3	2483.50	65.4 PK	74.0	-8.6	1.84 H	136	68.8	-3.4
4	2483.50	46.5 AV	54.0	-7.5	1.84 H	136	49.9	-3.4
5	4924.00	47.1 PK	74.0	-26.9	1.09 H	157	45.5	1.6
6	4924.00	45.3 AV	54.0	-8.7	1.09 H	157	43.7	1.6
7	7386.00	55.0 PK	74.0	-19.0	1.13 H	239	47.1	7.9
8	7386.00	51.0 AV	54.0	-3.0	1.13 H	239	43.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

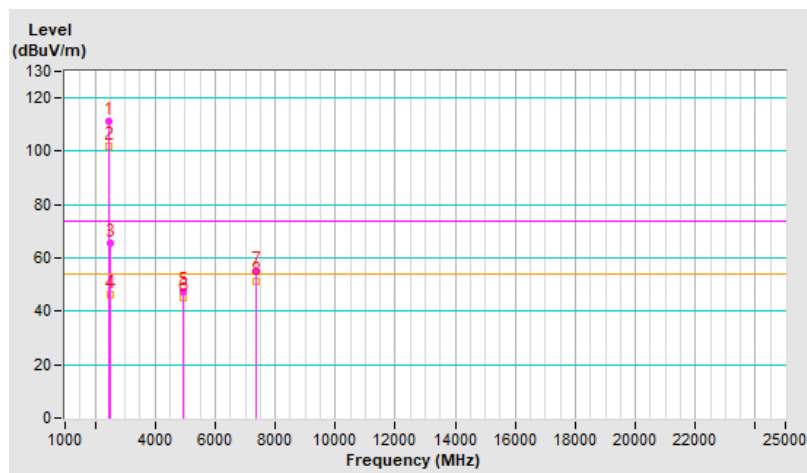


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.4 PK			2.16 V	195	109.9	-3.5
2	*2462.00	97.5 AV			2.16 V	195	101.0	-3.5
3	2483.50	63.1 PK	74.0	-10.9	2.16 V	195	66.5	-3.4
4	2483.50	45.3 AV	54.0	-8.7	2.16 V	195	48.7	-3.4
5	4924.00	46.2 PK	74.0	-27.8	1.00 V	215	44.6	1.6
6	4924.00	43.9 AV	54.0	-10.1	1.00 V	215	42.3	1.6
7	7386.00	54.0 PK	74.0	-20.0	1.21 V	317	46.1	7.9
8	7386.00	49.8 AV	54.0	-4.2	1.21 V	317	41.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

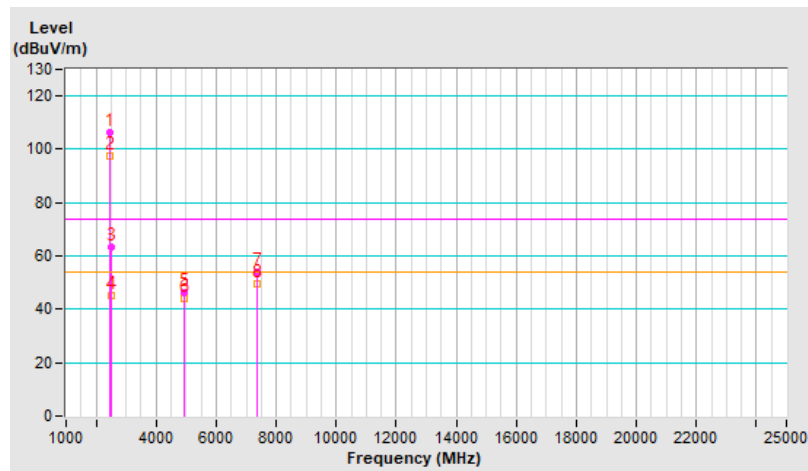


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.3 PK			1.92 H	128	114.7	-3.4
2	*2467.00	102.1 AV			1.92 H	128	105.5	-3.4
3	2483.50	67.5 PK	74.0	-6.5	1.92 H	128	70.9	-3.4
4	2483.50	52.0 AV	54.0	-2.0	1.92 H	128	55.4	-3.4
5	4934.00	47.2 PK	74.0	-26.8	1.03 H	162	45.6	1.6
6	4934.00	45.7 AV	54.0	-8.3	1.03 H	162	44.1	1.6
7	7401.00	54.5 PK	74.0	-19.5	1.13 H	243	46.6	7.9
8	7401.00	51.0 AV	54.0	-3.0	1.13 H	243	43.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

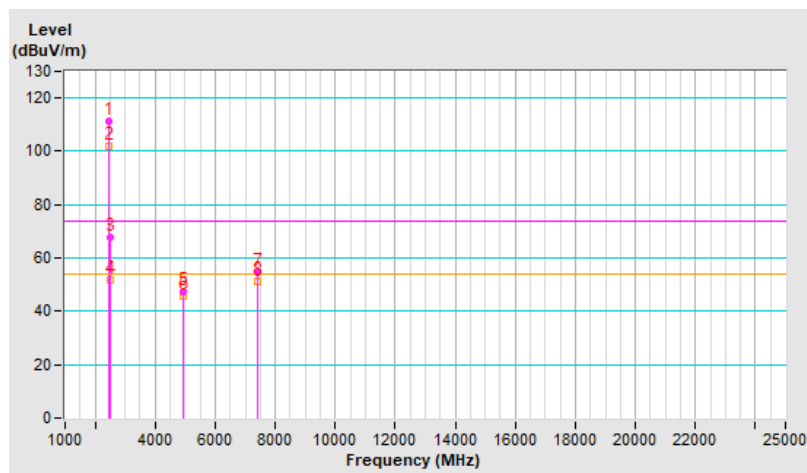


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.9 PK			2.15 V	191	110.3	-3.4
2	*2467.00	97.3 AV			2.15 V	191	100.7	-3.4
3	2483.50	64.3 PK	74.0	-9.7	2.15 V	191	67.7	-3.4
4	2483.50	47.1 AV	54.0	-6.9	2.15 V	191	50.5	-3.4
5	4934.00	45.7 PK	74.0	-28.3	1.00 V	207	44.1	1.6
6	4934.00	43.5 AV	54.0	-10.5	1.00 V	207	41.9	1.6
7	7401.00	54.3 PK	74.0	-19.7	1.21 V	300	46.4	7.9
8	7401.00	50.2 AV	54.0	-3.8	1.21 V	300	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

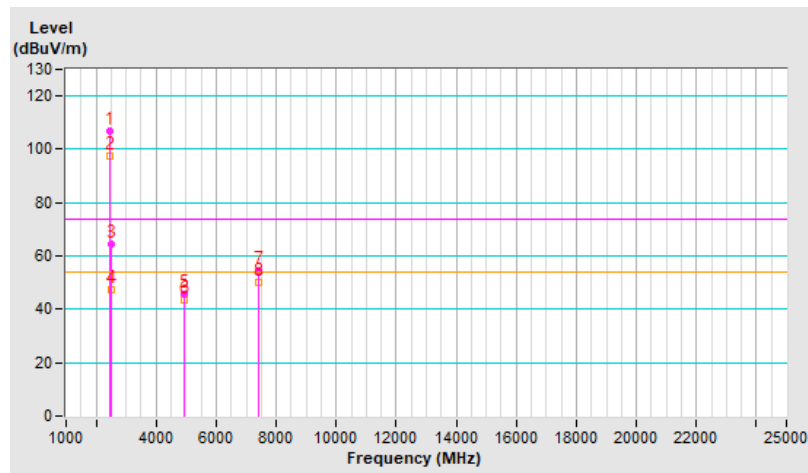


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.2 PK			1.94 H	130	113.6	-3.4
2	*2472.00	100.9 AV			1.94 H	130	104.3	-3.4
3	2483.50	65.8 PK	74.0	-8.2	1.94 H	130	69.2	-3.4
4	2483.50	52.2 AV	54.0	-1.8	1.94 H	130	55.6	-3.4
5	4944.00	47.5 PK	74.0	-26.5	1.01 H	160	45.9	1.6
6	4944.00	46.0 AV	54.0	-8.0	1.01 H	160	44.4	1.6
7	7416.00	53.8 PK	74.0	-20.2	1.18 H	219	46.0	7.8
8	7416.00	50.1 AV	54.0	-3.9	1.18 H	219	42.3	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

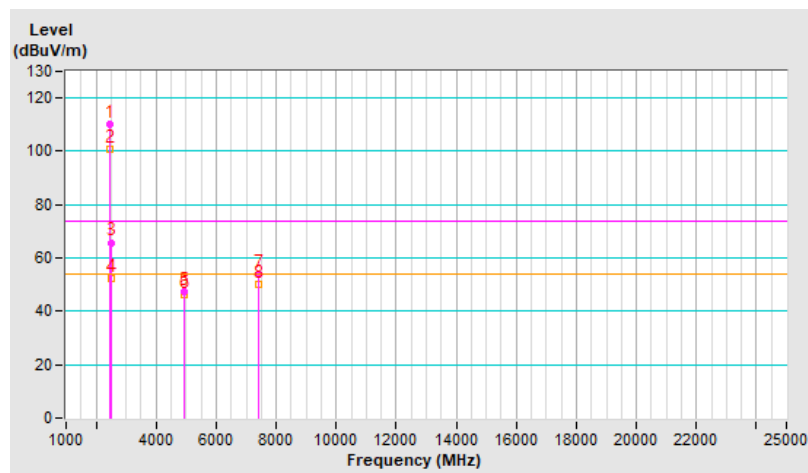


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.3 PK			2.13 V	197	109.7	-3.4
2	*2472.00	97.0 AV			2.13 V	197	100.4	-3.4
3	2483.50	59.1 PK	74.0	-14.9	2.13 V	197	62.5	-3.4
4	2483.50	46.3 AV	54.0	-7.7	2.13 V	197	49.7	-3.4
5	4944.00	45.8 PK	74.0	-28.2	1.00 V	210	44.2	1.6
6	4944.00	43.9 AV	54.0	-10.1	1.00 V	210	42.3	1.6
7	7416.00	53.7 PK	74.0	-20.3	1.14 V	316	45.9	7.8
8	7416.00	49.5 AV	54.0	-4.5	1.14 V	316	41.7	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

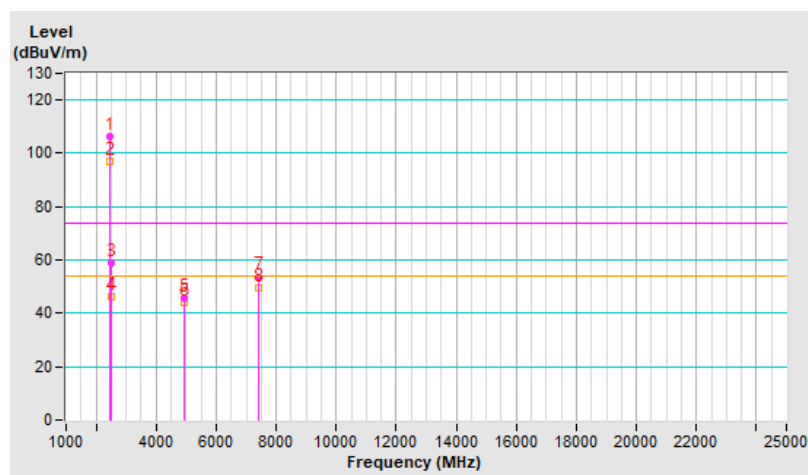


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.7 PK	74.0	-0.3	1.91 H	122	77.3	-3.6
2	2390.00	46.6 AV	54.0	-7.4	1.91 H	122	50.2	-3.6
3	*2412.00	111.5 PK			1.91 H	122	115.0	-3.5
4	*2412.00	100.5 AV			1.91 H	122	104.0	-3.5
5	4824.00	47.2 PK	74.0	-26.8	1.14 H	149	45.5	1.7
6	4824.00	45.6 AV	54.0	-8.4	1.14 H	149	43.9	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

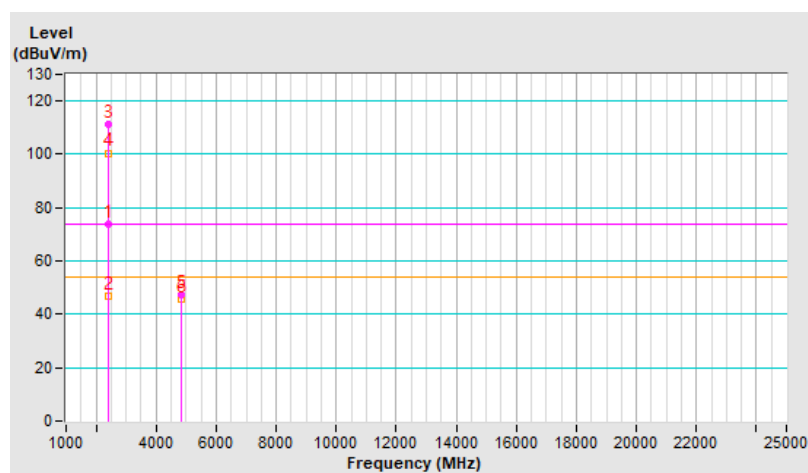


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	2.13 V	193	75.2	-3.6
2	2390.00	44.5 AV	54.0	-9.5	2.13 V	193	48.1	-3.6
3	*2412.00	109.1 PK			2.13 V	193	112.6	-3.5
4	*2412.00	97.9 AV			2.13 V	193	101.4	-3.5
5	4824.00	46.7 PK	74.0	-27.3	1.00 V	209	45.0	1.7
6	4824.00	44.3 AV	54.0	-9.7	1.00 V	209	42.6	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

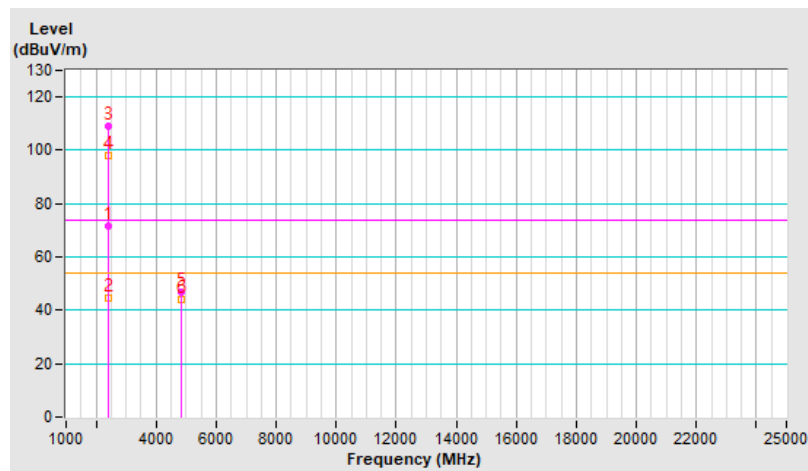


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.9 PK	74.0	-1.1	1.84 H	118	76.5	-3.6
2	2390.00	47.5 AV	54.0	-6.5	1.84 H	118	51.1	-3.6
3	*2437.00	117.5 PK			1.84 H	118	121.0	-3.5
4	*2437.00	105.1 AV			1.84 H	118	108.6	-3.5
5	2483.50	70.1 PK	74.0	-3.9	1.84 H	118	73.5	-3.4
6	2483.50	47.9 AV	54.0	-6.1	1.84 H	118	51.3	-3.4
7	4874.00	47.6 PK	74.0	-26.4	1.01 H	170	46.1	1.5
8	4874.00	45.7 AV	54.0	-8.3	1.01 H	170	44.2	1.5
9	7311.00	54.0 PK	74.0	-20.0	1.14 H	226	46.4	7.6
10	7311.00	50.5 AV	54.0	-3.5	1.14 H	226	42.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

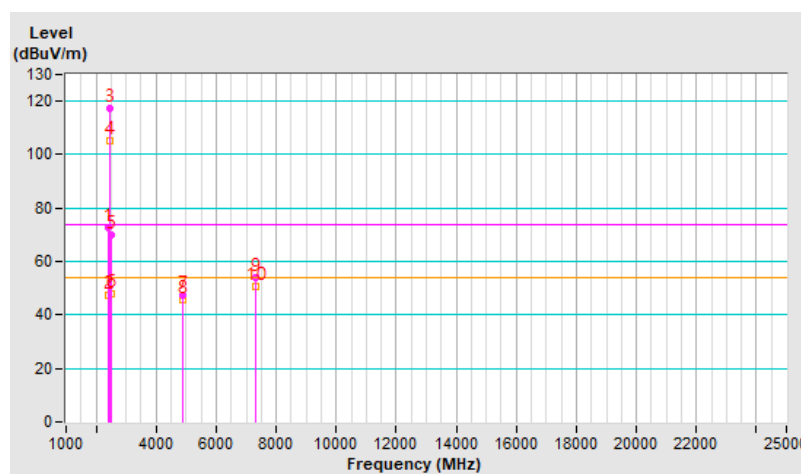


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	2.10 V	190	72.7	-3.6
2	2390.00	44.2 AV	54.0	-9.8	2.10 V	190	47.8	-3.6
3	*2437.00	113.8 PK			2.10 V	190	117.3	-3.5
4	*2437.00	101.4 AV			2.10 V	190	104.9	-3.5
5	2483.50	61.5 PK	74.0	-12.5	2.10 V	190	64.9	-3.4
6	2483.50	44.3 AV	54.0	-9.7	2.10 V	190	47.7	-3.4
7	4874.00	46.7 PK	74.0	-27.3	1.00 V	208	45.2	1.5
8	4874.00	44.3 AV	54.0	-9.7	1.00 V	208	42.8	1.5
9	7311.00	54.2 PK	74.0	-19.8	1.21 V	306	46.6	7.6
10	7311.00	49.7 AV	54.0	-4.3	1.21 V	306	42.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

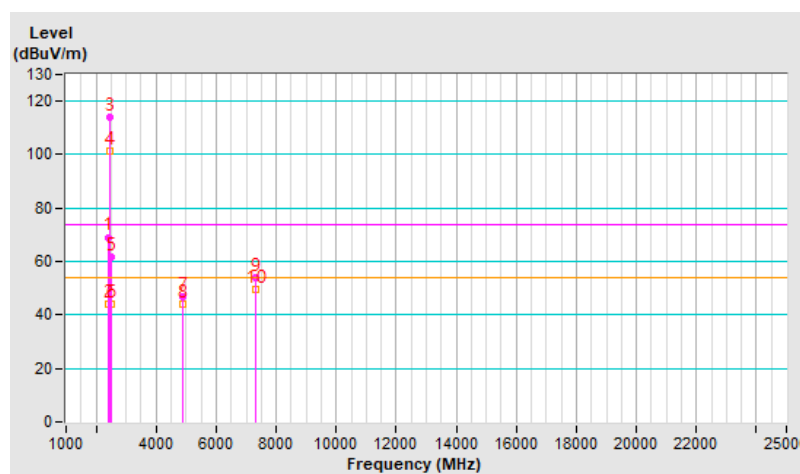


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.1 PK			1.94 H	127	114.6	-3.5
2	*2462.00	100.0 AV			1.94 H	127	103.5	-3.5
3	2483.50	67.1 PK	74.0	-6.9	1.94 H	127	70.5	-3.4
4	2483.50	47.3 AV	54.0	-6.7	1.94 H	127	50.7	-3.4
5	4924.00	47.2 PK	74.0	-26.8	1.08 H	165	45.6	1.6
6	4924.00	45.7 AV	54.0	-8.3	1.08 H	165	44.1	1.6
7	7386.00	54.1 PK	74.0	-19.9	1.08 H	239	46.2	7.9
8	7386.00	50.2 AV	54.0	-3.8	1.08 H	239	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

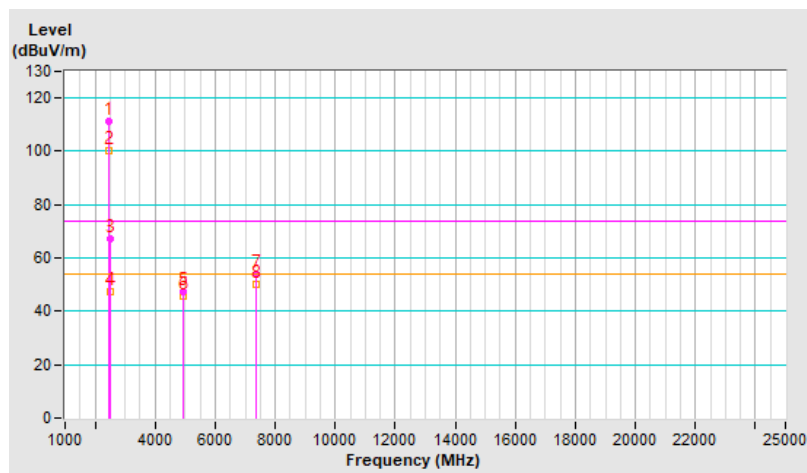


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.4 PK			2.19 V	199	110.9	-3.5
2	*2462.00	95.9 AV			2.19 V	199	99.4	-3.5
3	2483.50	67.7 PK	74.0	-6.3	2.19 V	199	71.1	-3.4
4	2483.50	47.0 AV	54.0	-7.0	2.19 V	199	50.4	-3.4
5	4924.00	45.9 PK	74.0	-28.1	1.00 V	201	44.3	1.6
6	4924.00	43.5 AV	54.0	-10.5	1.00 V	201	41.9	1.6
7	7386.00	54.0 PK	74.0	-20.0	1.17 V	303	46.1	7.9
8	7386.00	49.7 AV	54.0	-4.3	1.17 V	303	41.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

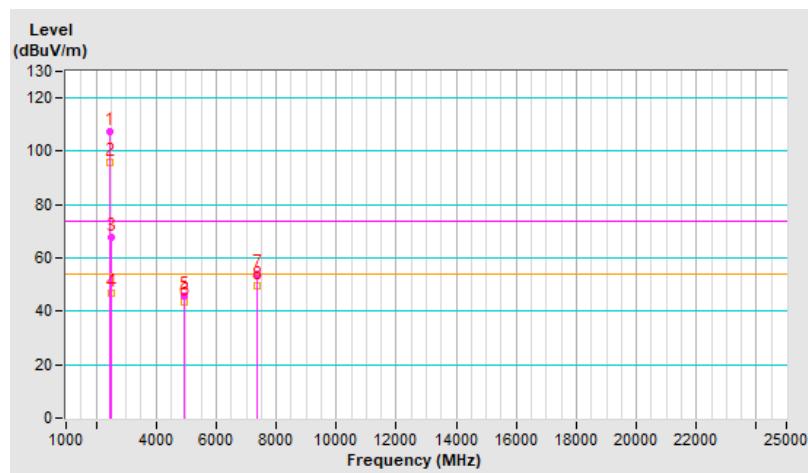


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.8 PK			1.87 H	133	113.2	-3.4
2	*2467.00	99.4 AV			1.87 H	133	102.8	-3.4
3	2483.50	60.3 PK	74.0	-13.7	1.87 H	133	63.7	-3.4
4	2483.50	49.4 AV	54.0	-4.6	1.87 H	133	52.8	-3.4
5	4934.00	47.1 PK	74.0	-26.9	1.09 H	171	45.5	1.6
6	4934.00	45.4 AV	54.0	-8.6	1.09 H	171	43.8	1.6
7	7401.00	54.3 PK	74.0	-19.7	1.17 H	219	46.4	7.9
8	7401.00	50.8 AV	54.0	-3.2	1.17 H	219	42.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

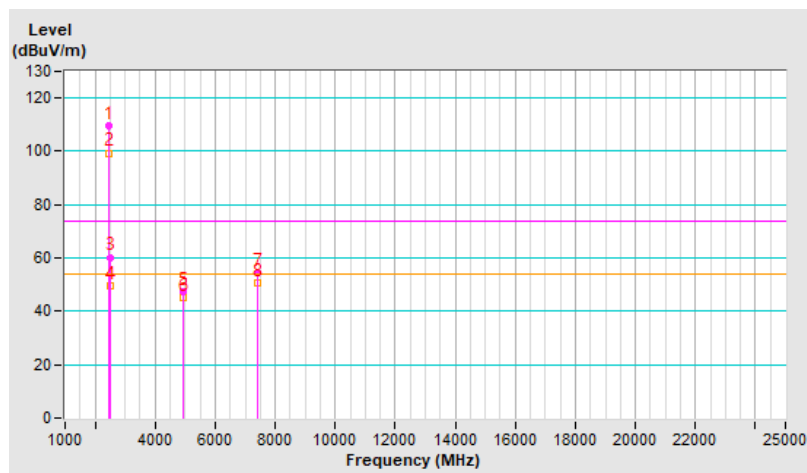


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.5 PK			2.12 V	192	108.9	-3.4
2	*2467.00	94.6 AV			2.12 V	192	98.0	-3.4
3	2483.50	59.6 PK	74.0	-14.4	2.12 V	192	63.0	-3.4
4	2483.50	46.1 AV	54.0	-7.9	2.12 V	192	49.5	-3.4
5	4934.00	45.6 PK	74.0	-28.4	1.00 V	222	44.0	1.6
6	4934.00	43.5 AV	54.0	-10.5	1.00 V	222	41.9	1.6
7	7401.00	53.8 PK	74.0	-20.2	1.19 V	316	45.9	7.9
8	7401.00	49.6 AV	54.0	-4.4	1.19 V	316	41.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

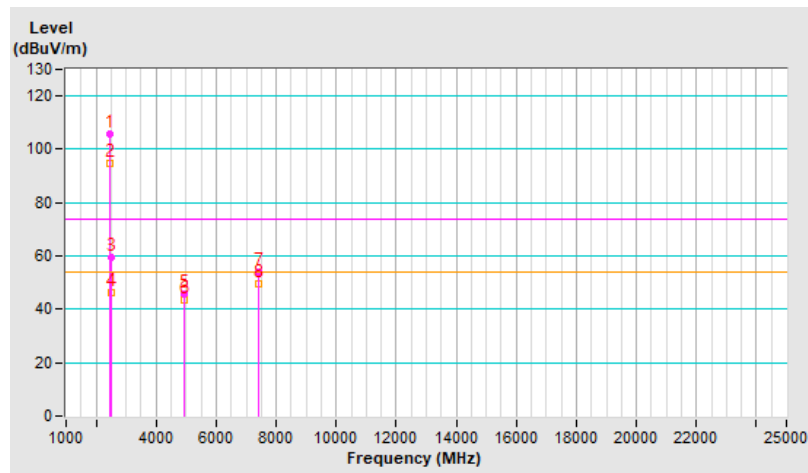


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.5 PK			1.88 H	147	112.9	-3.4
2	*2472.00	98.5 AV			1.88 H	147	101.9	-3.4
3	2483.50	62.6 PK	74.0	-11.4	1.88 H	147	66.0	-3.4
4	2483.50	48.6 AV	54.0	-5.4	1.88 H	147	52.0	-3.4
5	4944.00	47.3 PK	74.0	-26.7	1.07 H	169	45.7	1.6
6	4944.00	45.3 AV	54.0	-8.7	1.07 H	169	43.7	1.6
7	7416.00	53.5 PK	74.0	-20.5	1.12 H	227	45.7	7.8
8	7416.00	50.1 AV	54.0	-3.9	1.12 H	227	42.3	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

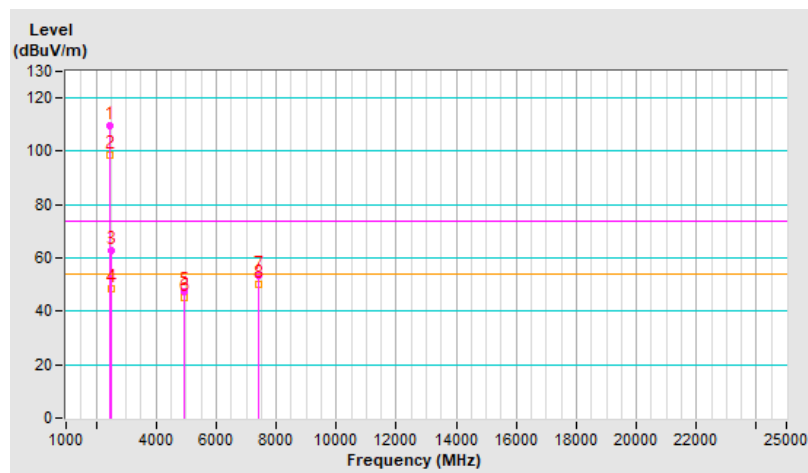


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.0 PK			2.18 V	198	108.4	-3.4
2	*2472.00	94.5 AV			2.18 V	198	97.9	-3.4
3	2483.50	61.5 PK	74.0	-12.5	2.18 V	198	64.9	-3.4
4	2483.50	46.1 AV	54.0	-7.9	2.18 V	198	49.5	-3.4
5	4944.00	46.2 PK	74.0	-27.8	1.00 V	196	44.6	1.6
6	4944.00	44.3 AV	54.0	-9.7	1.00 V	196	42.7	1.6
7	7416.00	54.0 PK	74.0	-20.0	1.17 V	314	46.2	7.8
8	7416.00	49.6 AV	54.0	-4.4	1.17 V	314	41.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

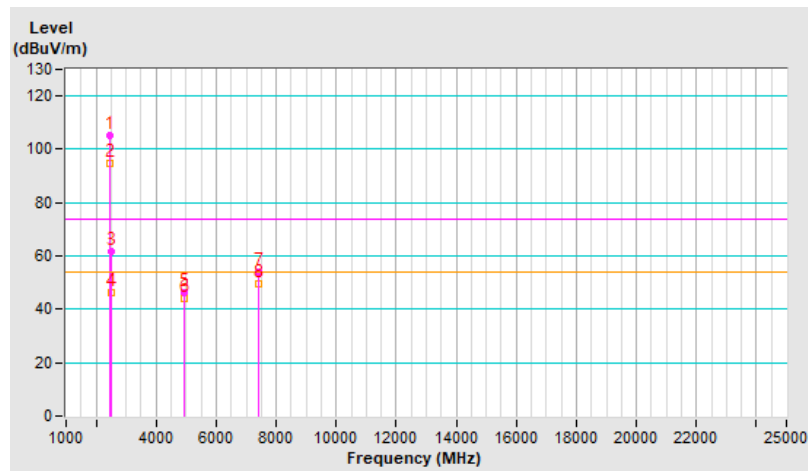


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.4 PK	74.0	-5.6	1.94 H	128	72.0	-3.6
2	2390.00	50.6 AV	54.0	-3.4	1.94 H	128	54.2	-3.6
3	*2422.00	109.5 PK			1.94 H	128	113.0	-3.5
4	*2422.00	97.3 AV			1.94 H	128	100.8	-3.5
5	4844.00	47.1 PK	74.0	-26.9	1.09 H	157	45.5	1.6
6	4844.00	45.4 AV	54.0	-8.6	1.09 H	157	43.8	1.6
7	7266.00	54.5 PK	74.0	-19.5	1.11 H	233	47.2	7.3
8	7266.00	50.9 AV	54.0	-3.1	1.11 H	233	43.6	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

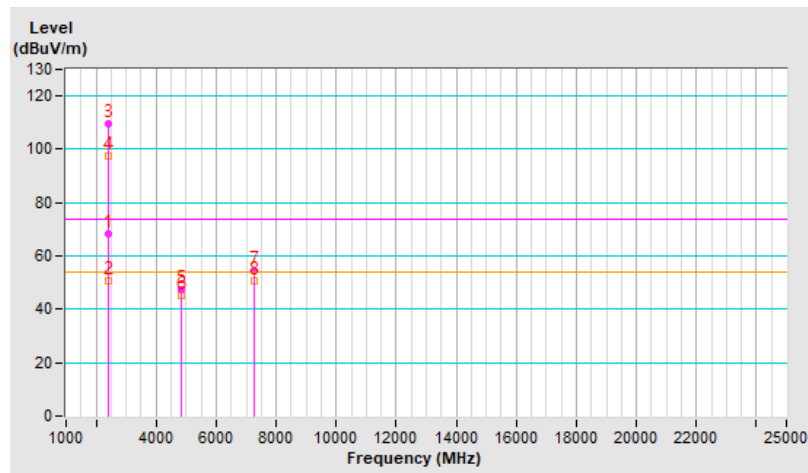


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.3 PK	74.0	-9.7	2.12 V	192	67.9	-3.6
2	2390.00	45.4 AV	54.0	-8.6	2.12 V	192	49.0	-3.6
3	*2422.00	104.9 PK			2.12 V	192	108.4	-3.5
4	*2422.00	92.8 AV			2.12 V	192	96.3	-3.5
5	4844.00	45.8 PK	74.0	-28.2	1.00 V	222	44.2	1.6
6	4844.00	43.7 AV	54.0	-10.3	1.00 V	222	42.1	1.6
7	7266.00	53.6 PK	74.0	-20.4	1.14 V	312	46.3	7.3
8	7266.00	49.5 AV	54.0	-4.5	1.14 V	312	42.2	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

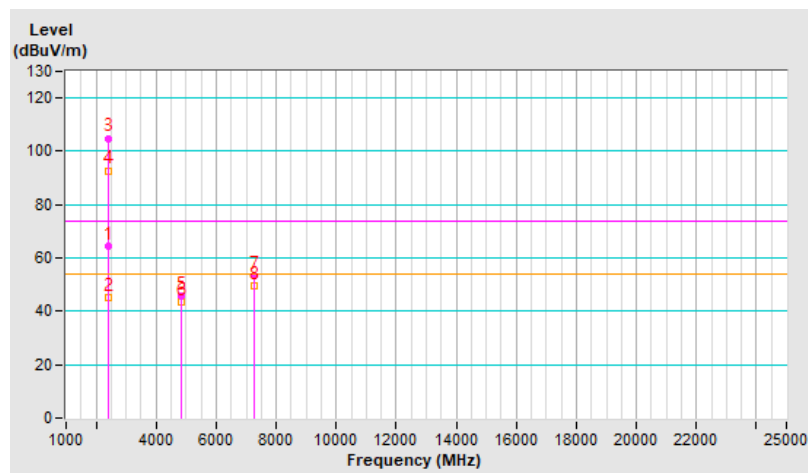


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.2 PK	74.0	-0.8	1.92 H	144	76.8	-3.6
2	2390.00	49.4 AV	54.0	-4.6	1.92 H	144	53.0	-3.6
3	*2437.00	110.5 PK			1.92 H	144	114.0	-3.5
4	*2437.00	99.5 AV			1.92 H	144	103.0	-3.5
5	2483.50	70.2 PK	74.0	-3.8	1.92 H	144	73.6	-3.4
6	2483.50	50.8 AV	54.0	-3.2	1.92 H	144	54.2	-3.4
7	4874.00	47.6 PK	74.0	-26.4	1.08 H	183	46.1	1.5
8	4874.00	45.9 AV	54.0	-8.1	1.08 H	183	44.4	1.5
9	7311.00	53.9 PK	74.0	-20.1	1.09 H	221	46.3	7.6
10	7311.00	50.5 AV	54.0	-3.5	1.09 H	221	42.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

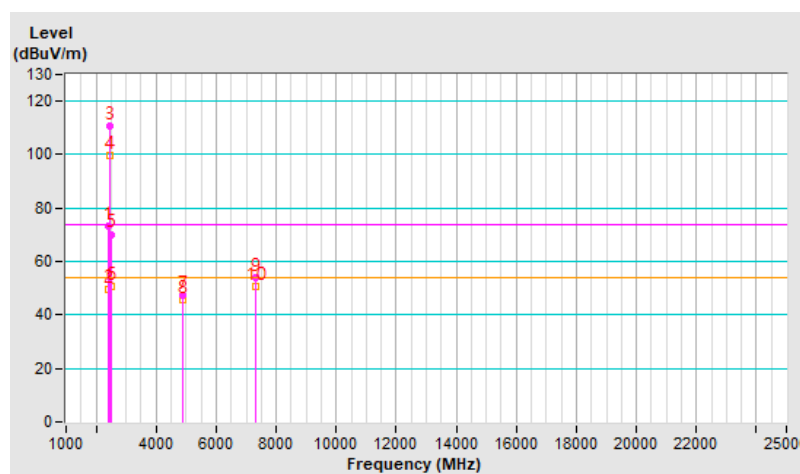


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	2.14 V	194	69.9	-3.6
2	2390.00	45.3 AV	54.0	-8.7	2.14 V	194	48.9	-3.6
3	*2437.00	106.2 PK			2.14 V	194	109.7	-3.5
4	*2437.00	94.3 AV			2.14 V	194	97.8	-3.5
5	2483.50	66.9 PK	74.0	-7.1	2.14 V	194	70.3	-3.4
6	2483.50	46.8 AV	54.0	-7.2	2.14 V	194	50.2	-3.4
7	4874.00	46.6 PK	74.0	-27.4	1.00 V	222	45.1	1.5
8	4874.00	44.2 AV	54.0	-9.8	1.00 V	222	42.7	1.5
9	7311.00	53.6 PK	74.0	-20.4	1.11 V	310	46.0	7.6
10	7311.00	49.6 AV	54.0	-4.4	1.11 V	310	42.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

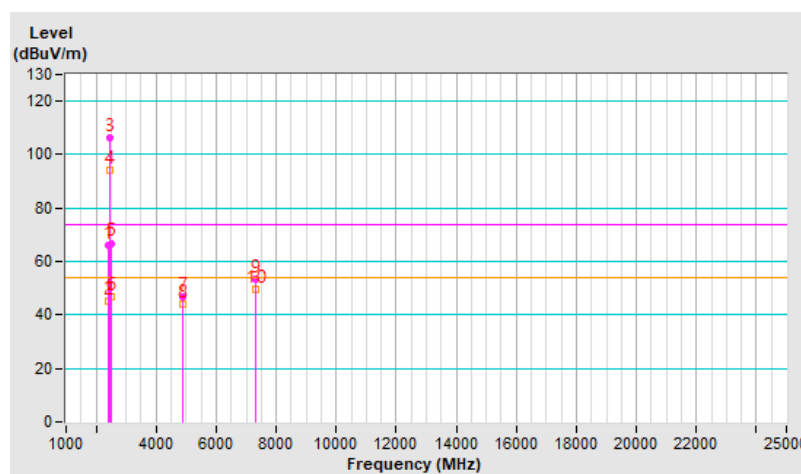


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	109.6 PK			1.88 H	133	113.0	-3.4
2	*2452.00	97.5 AV			1.88 H	133	100.9	-3.4
3	2483.50	67.9 PK	74.0	-6.1	1.88 H	133	71.3	-3.4
4	2483.50	50.1 AV	54.0	-3.9	1.88 H	133	53.5	-3.4
5	4904.00	47.3 PK	74.0	-26.7	1.11 H	181	45.8	1.5
6	4904.00	45.4 AV	54.0	-8.6	1.11 H	181	43.9	1.5
7	7356.00	53.9 PK	74.0	-20.1	1.15 H	219	46.0	7.9
8	7356.00	50.2 AV	54.0	-3.8	1.15 H	219	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

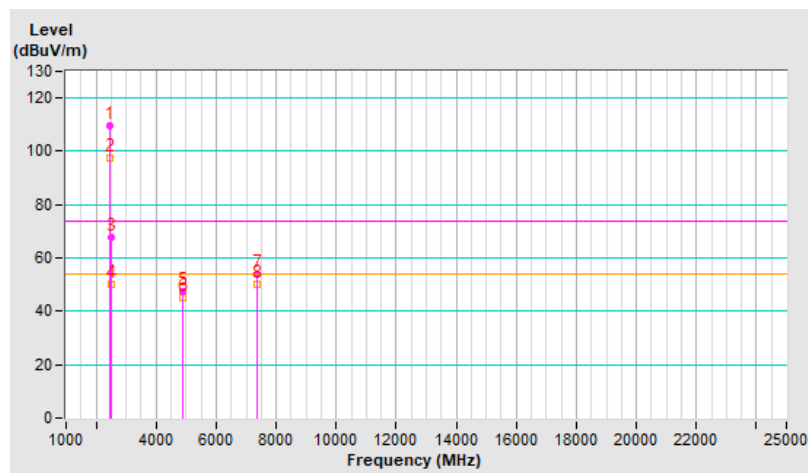


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	104.1 PK			2.10 V	190	107.5	-3.4
2	*2452.00	92.5 AV			2.10 V	190	95.9	-3.4
3	2483.50	59.6 PK	74.0	-14.4	2.10 V	190	63.0	-3.4
4	2483.50	46.5 AV	54.0	-7.5	2.10 V	190	49.9	-3.4
5	4904.00	46.4 PK	74.0	-27.6	1.00 V	221	44.9	1.5
6	4904.00	44.2 AV	54.0	-9.8	1.00 V	221	42.7	1.5
7	7356.00	54.8 PK	74.0	-19.2	1.13 V	300	46.9	7.9
8	7356.00	50.4 AV	54.0	-3.6	1.13 V	300	42.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

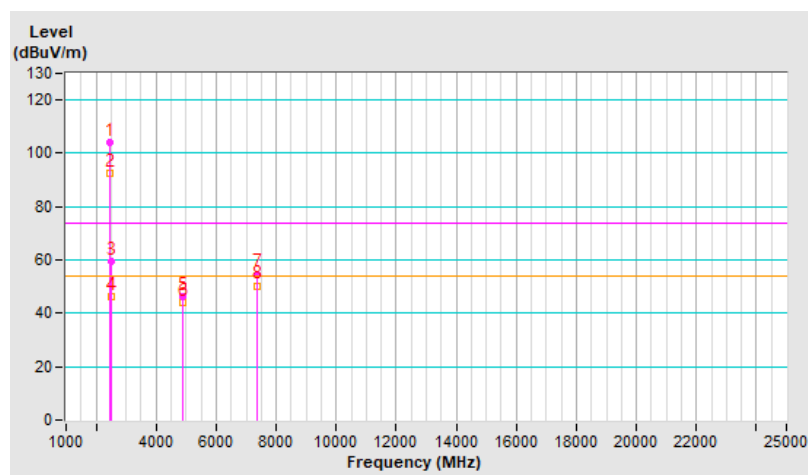


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.5 PK			1.86 H	165	111.9	-3.4
2	*2457.00	96.4 AV			1.86 H	165	99.8	-3.4
3	2483.50	63.3 PK	74.0	-10.7	1.86 H	165	66.7	-3.4
4	2483.50	50.2 AV	54.0	-3.8	1.86 H	165	53.6	-3.4
5	4914.00	47.1 PK	74.0	-26.9	1.03 H	187	45.6	1.5
6	4914.00	45.3 AV	54.0	-8.7	1.03 H	187	43.8	1.5
7	7371.00	54.9 PK	74.0	-19.1	1.16 H	232	47.1	7.8
8	7371.00	51.0 AV	54.0	-3.0	1.16 H	232	43.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

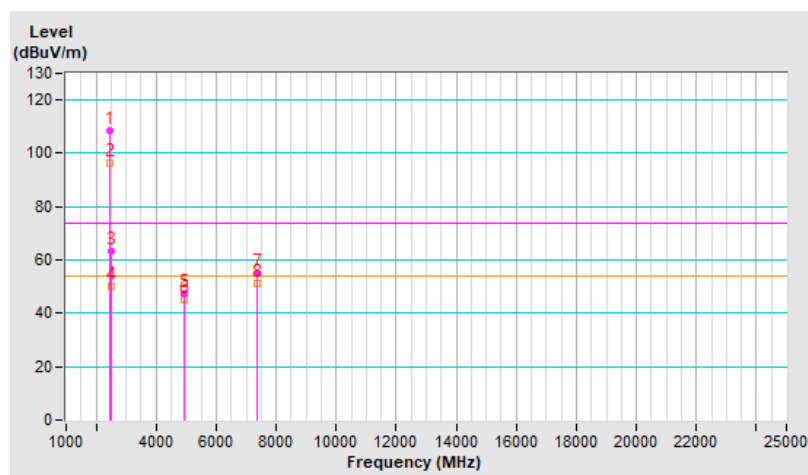


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	104.8 PK			2.13 V	194	108.2	-3.4
2	*2457.00	91.6 AV			2.13 V	194	95.0	-3.4
3	2483.50	58.8 PK	74.0	-15.2	2.13 V	194	62.2	-3.4
4	2483.50	46.9 AV	54.0	-7.1	2.13 V	194	50.3	-3.4
5	4914.00	45.6 PK	74.0	-28.4	1.00 V	198	44.1	1.5
6	4914.00	43.7 AV	54.0	-10.3	1.00 V	198	42.2	1.5
7	7371.00	54.1 PK	74.0	-19.9	1.11 V	297	46.3	7.8
8	7371.00	49.8 AV	54.0	-4.2	1.11 V	297	42.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

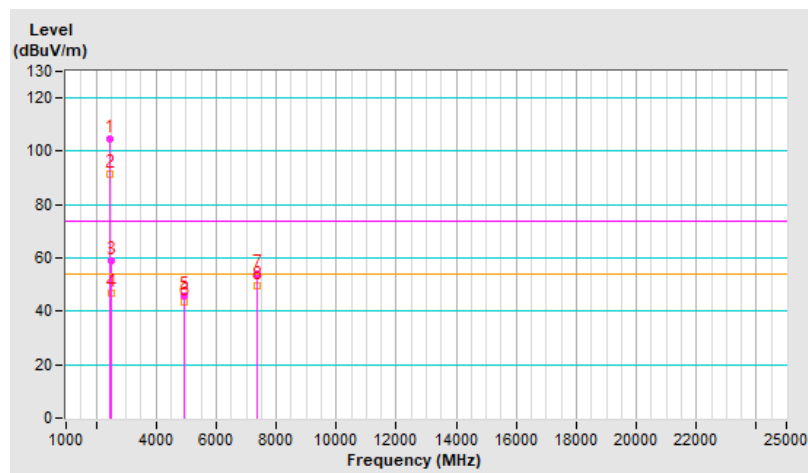


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.5 PK			1.88 H	134	111.0	-3.5
2	*2462.00	95.3 AV			1.88 H	134	98.8	-3.5
3	2483.50	63.1 PK	74.0	-10.9	1.88 H	134	66.5	-3.4
4	2483.50	50.9 AV	54.0	-3.1	1.88 H	134	54.3	-3.4
5	4924.00	47.4 PK	74.0	-26.6	1.00 H	160	45.8	1.6
6	4924.00	45.6 AV	54.0	-8.4	1.00 H	160	44.0	1.6
7	7386.00	54.5 PK	74.0	-19.5	1.10 H	240	46.6	7.9
8	7386.00	50.9 AV	54.0	-3.1	1.10 H	240	43.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

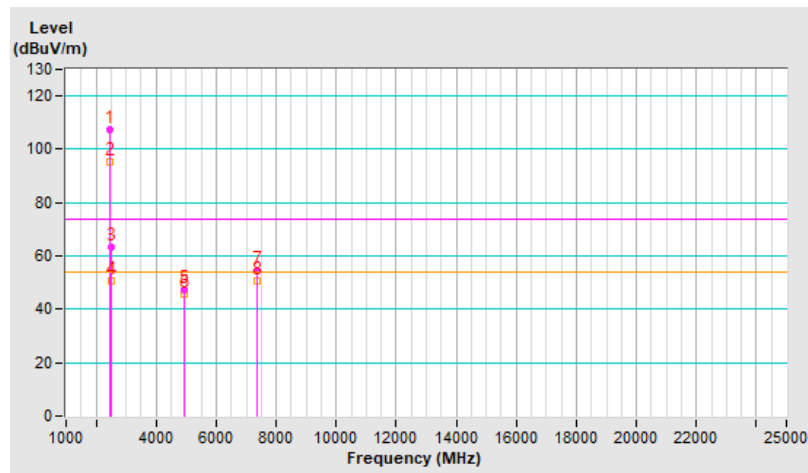


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.5 PK			2.19 V	199	107.0	-3.5
2	*2462.00	91.6 AV			2.19 V	199	95.1	-3.5
3	2483.50	59.8 PK	74.0	-14.2	2.19 V	199	63.2	-3.4
4	2483.50	47.1 AV	54.0	-6.9	2.19 V	199	50.5	-3.4
5	4924.00	45.6 PK	74.0	-28.4	1.00 V	220	44.0	1.6
6	4924.00	43.6 AV	54.0	-10.4	1.00 V	220	42.0	1.6
7	7386.00	54.3 PK	74.0	-19.7	1.13 V	302	46.4	7.9
8	7386.00	50.0 AV	54.0	-4.0	1.13 V	302	42.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

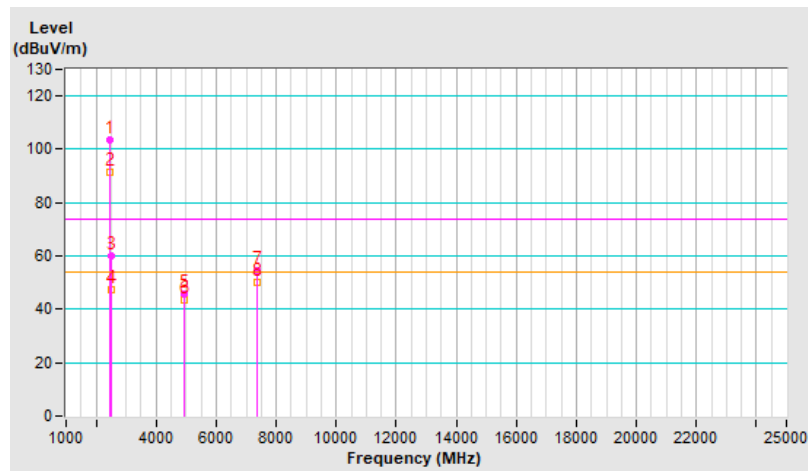


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.86 H	117	72.7	-3.6
2	2390.00	52.3 AV	54.0	-1.7	1.86 H	117	55.9	-3.6
3	*2412.00	120.1 PK			1.86 H	117	123.6	-3.5
4	*2412.00	109.1 AV			1.86 H	117	112.6	-3.5
5	4824.00	47.9 PK	74.0	-26.1	1.01 H	170	46.2	1.7
6	4824.00	45.6 AV	54.0	-8.4	1.01 H	170	43.9	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

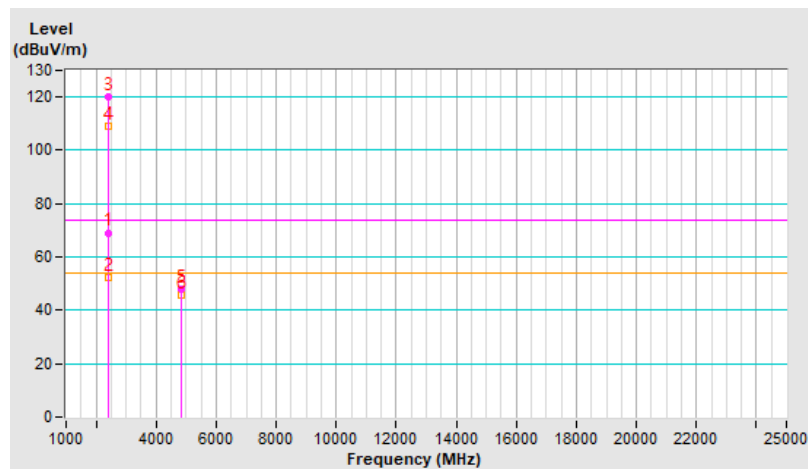


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.7 PK	74.0	-6.3	2.16 V	196	71.3	-3.6
2	2390.00	51.5 AV	54.0	-2.5	2.16 V	196	55.1	-3.6
3	*2412.00	116.5 PK			2.16 V	196	120.0	-3.5
4	*2412.00	103.1 AV			2.16 V	196	106.6	-3.5
5	4824.00	46.4 PK	74.0	-27.6	1.00 V	192	44.7	1.7
6	4824.00	44.0 AV	54.0	-10.0	1.00 V	192	42.3	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

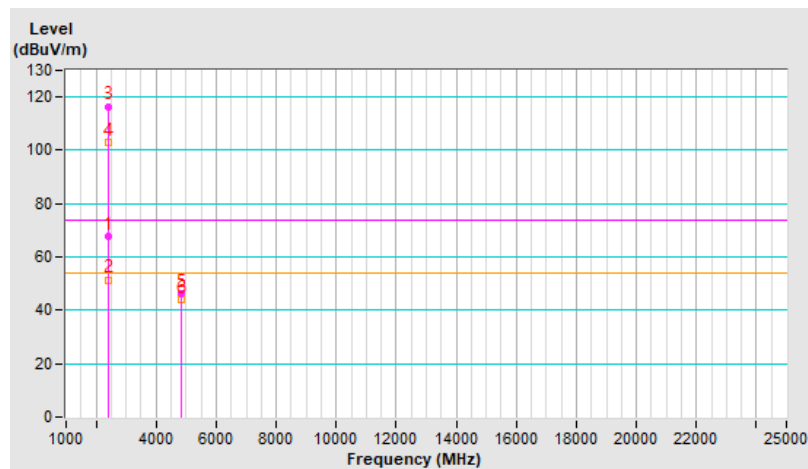


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.5 PK	74.0	-4.5	1.90 H	138	73.1	-3.6
2	2390.00	46.1 AV	54.0	-7.9	1.90 H	138	49.7	-3.6
3	*2437.00	123.5 PK			1.90 H	138	127.0	-3.5
4	*2437.00	112.1 AV			1.90 H	138	115.6	-3.5
5	2483.50	62.2 PK	74.0	-11.8	1.90 H	138	65.6	-3.4
6	2483.50	46.5 AV	54.0	-7.5	1.90 H	138	49.9	-3.4
7	4874.00	47.7 PK	74.0	-26.3	1.10 H	181	46.2	1.5
8	4874.00	45.7 AV	54.0	-8.3	1.10 H	181	44.2	1.5
9	7311.00	54.8 PK	74.0	-19.2	1.16 H	247	47.2	7.6
10	7311.00	50.9 AV	54.0	-3.1	1.16 H	247	43.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

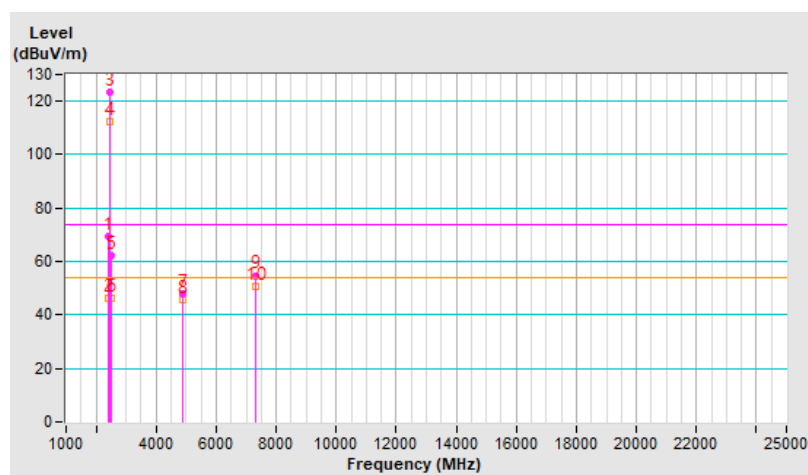


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.0 PK	74.0	-7.0	2.15 V	189	70.6	-3.6
2	2390.00	45.9 AV	54.0	-8.1	2.15 V	189	49.5	-3.6
3	*2437.00	120.5 PK			2.15 V	189	124.0	-3.5
4	*2437.00	110.5 AV			2.15 V	189	114.0	-3.5
5	2483.50	58.3 PK	74.0	-15.7	2.15 V	189	61.7	-3.4
6	2483.50	45.6 AV	54.0	-8.4	2.15 V	189	49.0	-3.4
7	4874.00	46.4 PK	74.0	-27.6	1.00 V	223	44.9	1.5
8	4874.00	44.2 AV	54.0	-9.8	1.00 V	223	42.7	1.5
9	7311.00	54.3 PK	74.0	-19.7	1.14 V	288	46.7	7.6
10	7311.00	49.9 AV	54.0	-4.1	1.14 V	288	42.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

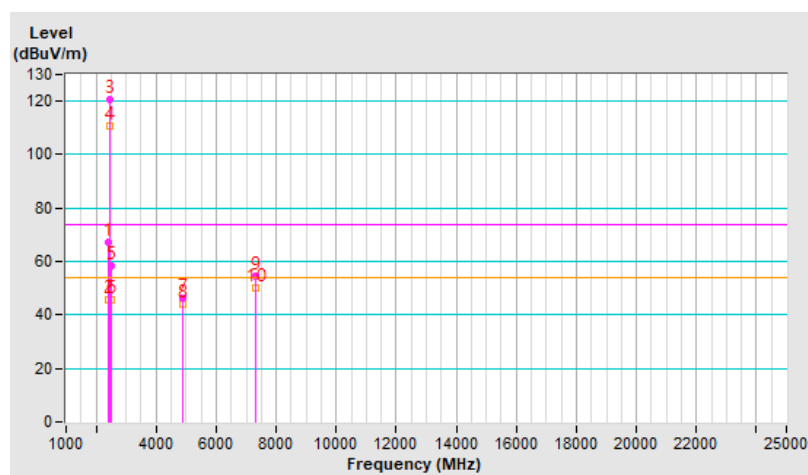


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.4 PK			1.90 H	138	121.9	-3.5
2	*2462.00	106.4 AV			1.90 H	138	109.9	-3.5
3	2483.50	71.0 PK	74.0	-3.0	1.90 H	138	74.4	-3.4
4	2483.50	45.6 AV	54.0	-8.4	1.90 H	138	49.0	-3.4
5	4924.00	47.5 PK	74.0	-26.5	1.07 H	162	45.9	1.6
6	4924.00	45.9 AV	54.0	-8.1	1.07 H	162	44.3	1.6
7	7386.00	54.5 PK	74.0	-19.5	1.10 H	228	46.6	7.9
8	7386.00	50.5 AV	54.0	-3.5	1.10 H	228	42.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

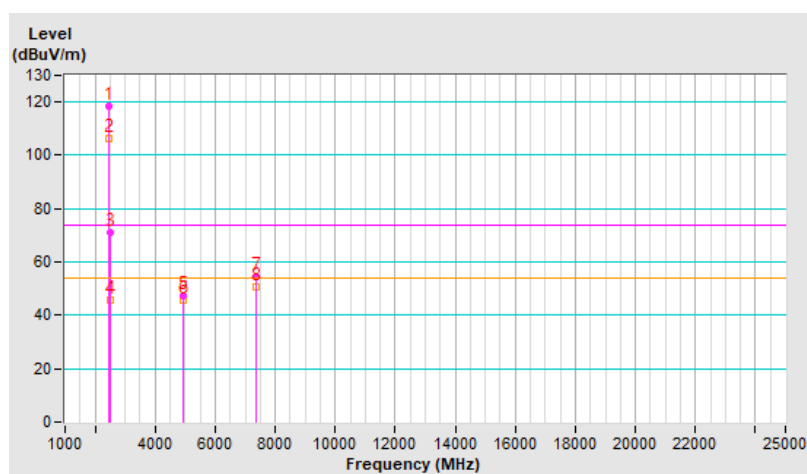


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.2 PK			2.16 V	195	117.7	-3.5
2	*2462.00	102.1 AV			2.16 V	195	105.6	-3.5
3	2483.50	68.1 PK	74.0	-5.9	2.16 V	195	71.5	-3.4
4	2483.50	48.8 AV	54.0	-5.2	2.16 V	195	52.2	-3.4
5	4924.00	46.7 PK	74.0	-27.3	1.00 V	218	45.1	1.6
6	4924.00	44.4 AV	54.0	-9.6	1.00 V	218	42.8	1.6
7	7386.00	54.1 PK	74.0	-19.9	1.11 V	289	46.2	7.9
8	7386.00	49.5 AV	54.0	-4.5	1.11 V	289	41.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

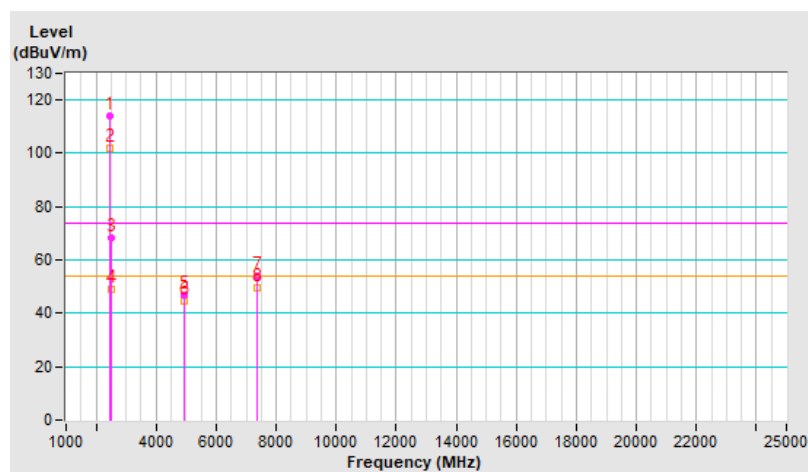


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.6 PK			1.87 H	125	117.0	-3.4
2	*2467.00	103.1 AV			1.87 H	125	106.5	-3.4
3	2483.50	61.5 PK	74.0	-12.5	1.87 H	125	64.9	-3.4
4	2483.50	45.6 AV	54.0	-8.4	1.87 H	125	49.0	-3.4
5	4934.00	47.6 PK	74.0	-26.4	1.07 H	181	46.0	1.6
6	4934.00	46.0 AV	54.0	-8.0	1.07 H	181	44.4	1.6
7	7401.00	53.8 PK	74.0	-20.2	1.10 H	230	45.9	7.9
8	7401.00	50.4 AV	54.0	-3.6	1.10 H	230	42.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

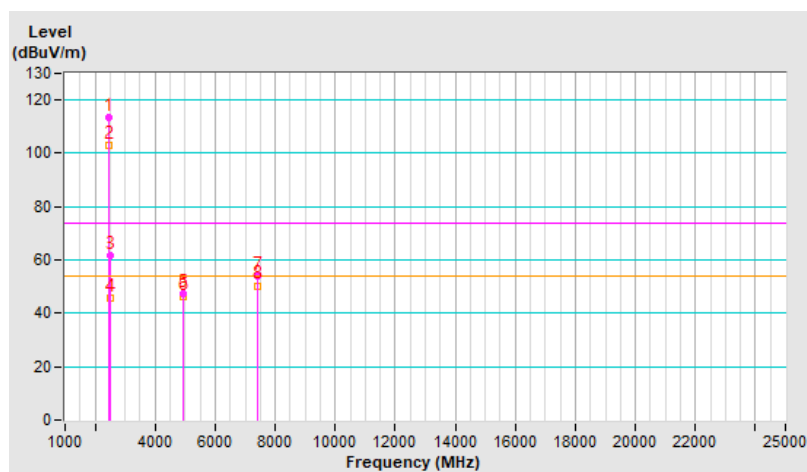


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.7 PK			2.14 V	194	114.1	-3.4
2	*2467.00	99.8 AV			2.14 V	194	103.2	-3.4
3	2483.50	61.5 PK	74.0	-12.5	2.14 V	194	64.9	-3.4
4	2483.50	43.6 AV	54.0	-10.4	2.14 V	194	47.0	-3.4
5	4934.00	45.8 PK	74.0	-28.2	1.00 V	212	44.2	1.6
6	4934.00	43.8 AV	54.0	-10.2	1.00 V	212	42.2	1.6
7	7401.00	53.8 PK	74.0	-20.2	1.15 V	289	45.9	7.9
8	7401.00	49.8 AV	54.0	-4.2	1.15 V	289	41.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

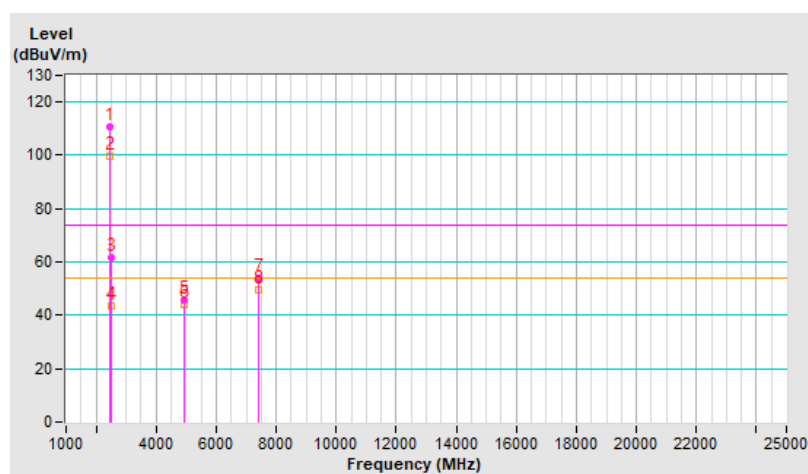


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.6 PK			1.87 H	148	115.0	-3.4
2	*2472.00	100.7 AV			1.87 H	148	104.1	-3.4
3	2483.50	57.9 PK	74.0	-16.1	1.87 H	148	61.3	-3.4
4	2483.50	45.3 AV	54.0	-8.7	1.87 H	148	48.7	-3.4
5	4944.00	47.9 PK	74.0	-26.1	1.07 H	188	46.3	1.6
6	4944.00	46.0 AV	54.0	-8.0	1.07 H	188	44.4	1.6
7	7416.00	54.0 PK	74.0	-20.0	1.14 H	229	46.2	7.8
8	7416.00	50.4 AV	54.0	-3.6	1.14 H	229	42.6	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

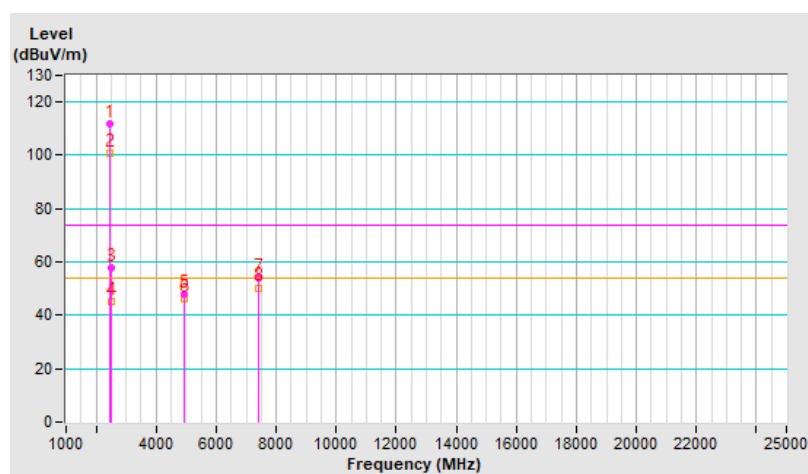


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.6 PK			2.13 V	193	112.0	-3.4
2	*2472.00	97.4 AV			2.13 V	193	100.8	-3.4
3	2483.50	61.0 PK	74.0	-13.0	2.13 V	193	64.4	-3.4
4	2483.50	43.1 AV	54.0	-10.9	2.13 V	193	46.5	-3.4
5	4944.00	46.4 PK	74.0	-27.6	1.01 V	192	44.8	1.6
6	4944.00	44.2 AV	54.0	-9.8	1.01 V	192	42.6	1.6
7	7416.00	54.5 PK	74.0	-19.5	1.14 V	297	46.7	7.8
8	7416.00	50.0 AV	54.0	-4.0	1.14 V	297	42.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

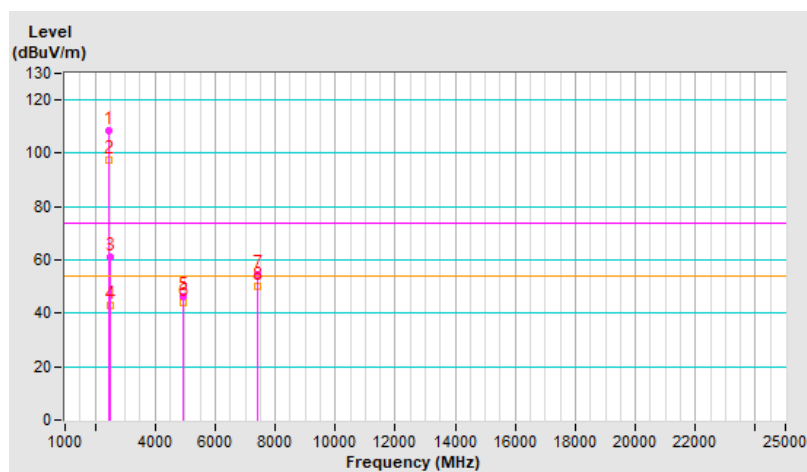


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	1.95 H	134	68.8	-3.6
2	2390.00	50.8 AV	54.0	-3.2	1.95 H	134	54.4	-3.6
3	*2412.00	117.5 PK			1.95 H	134	121.0	-3.5
4	*2412.00	106.1 AV			1.95 H	134	109.6	-3.5
5	4824.00	47.6 PK	74.0	-26.4	1.10 H	177	45.9	1.7
6	4824.00	45.8 AV	54.0	-8.2	1.10 H	177	44.1	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

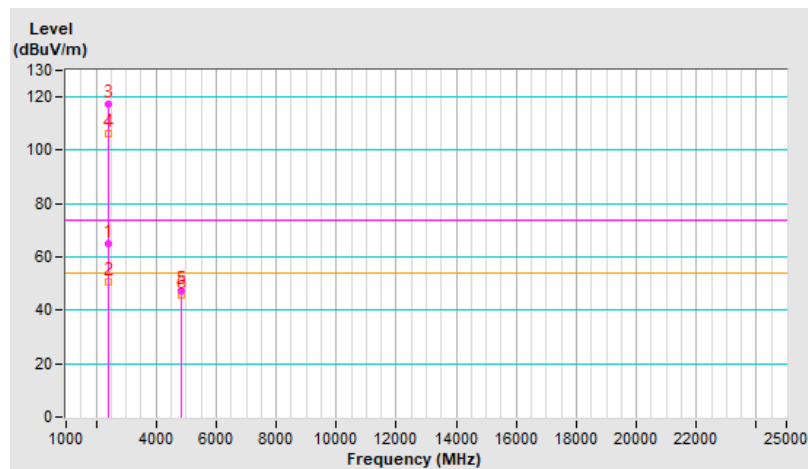


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	2.15 V	196	64.2	-3.6
2	2390.00	49.1 AV	54.0	-4.9	2.15 V	196	52.7	-3.6
3	*2412.00	112.4 PK			2.15 V	196	115.9	-3.5
4	*2412.00	101.5 AV			2.15 V	196	105.0	-3.5
5	4824.00	46.1 PK	74.0	-27.9	1.00 V	204	44.4	1.7
6	4824.00	44.0 AV	54.0	-10.0	1.00 V	204	42.3	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

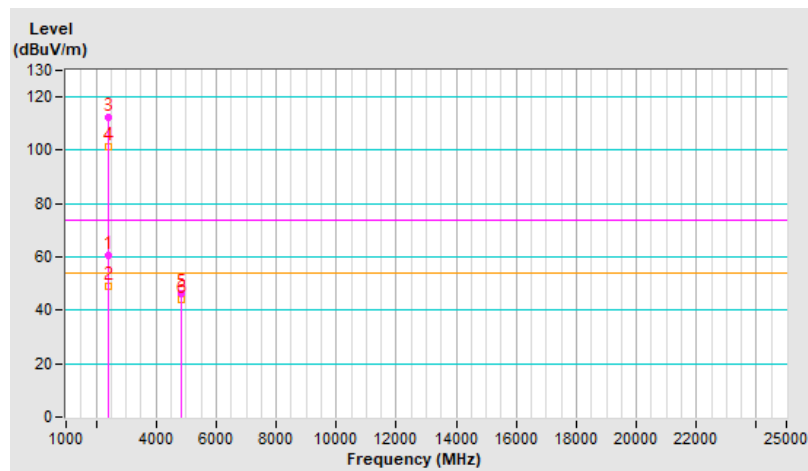


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.4 PK	74.0	-4.6	1.91 H	125	73.0	-3.6
2	2390.00	44.5 AV	54.0	-9.5	1.91 H	125	48.1	-3.6
3	*2437.00	120.5 PK			1.91 H	125	124.0	-3.5
4	*2437.00	109.3 AV			1.91 H	125	112.8	-3.5
5	2483.50	68.1 PK	74.0	-5.9	1.91 H	125	71.5	-3.4
6	2483.50	44.6 AV	54.0	-9.4	1.91 H	125	48.0	-3.4
7	4874.00	47.5 PK	74.0	-26.5	1.03 H	182	46.0	1.5
8	4874.00	45.6 AV	54.0	-8.4	1.03 H	182	44.1	1.5
9	7311.00	54.4 PK	74.0	-19.6	1.15 H	228	46.8	7.6
10	7311.00	50.7 AV	54.0	-3.3	1.15 H	228	43.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

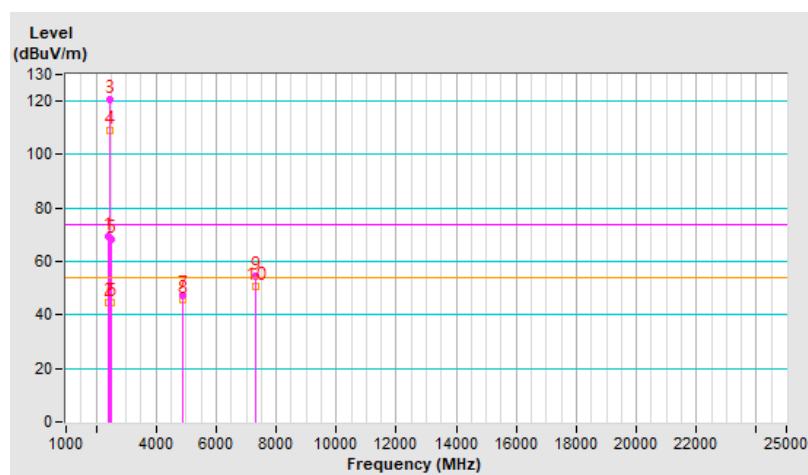


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	2.10 V	190	70.1	-3.6
2	2390.00	43.1 AV	54.0	-10.9	2.10 V	190	46.7	-3.6
3	*2437.00	117.6 PK			2.10 V	190	121.1	-3.5
4	*2437.00	106.3 AV			2.10 V	190	109.8	-3.5
5	2483.50	65.8 PK	74.0	-8.2	2.10 V	190	69.2	-3.4
6	2483.50	42.1 AV	54.0	-11.9	2.10 V	190	45.5	-3.4
7	4874.00	45.8 PK	74.0	-28.2	1.00 V	220	44.3	1.5
8	4874.00	44.0 AV	54.0	-10.0	1.00 V	220	42.5	1.5
9	7311.00	54.5 PK	74.0	-19.5	1.10 V	309	46.9	7.6
10	7311.00	50.3 AV	54.0	-3.7	1.10 V	309	42.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

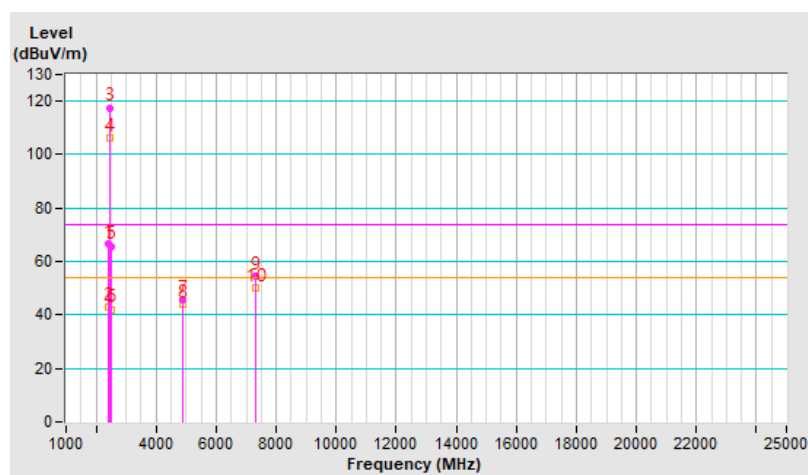


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.8 PK			1.91 H	117	121.3	-3.5
2	*2462.00	106.5 AV			1.91 H	117	110.0	-3.5
3	2483.50	67.5 PK	74.0	-6.5	1.91 H	117	70.9	-3.4
4	2483.50	48.5 AV	54.0	-5.5	1.91 H	117	51.9	-3.4
5	4924.00	47.8 PK	74.0	-26.2	1.08 H	175	46.2	1.6
6	4924.00	46.1 AV	54.0	-7.9	1.08 H	175	44.5	1.6
7	7386.00	54.4 PK	74.0	-19.6	1.16 H	218	46.5	7.9
8	7386.00	50.7 AV	54.0	-3.3	1.16 H	218	42.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

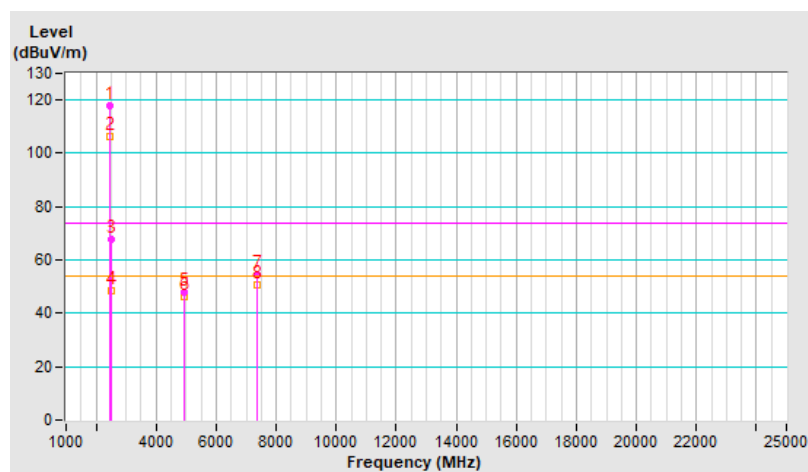


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.1 PK			2.11 V	191	117.6	-3.5
2	*2462.00	102.3 AV			2.11 V	191	105.8	-3.5
3	2483.50	70.6 PK	74.0	-3.4	2.11 V	191	74.0	-3.4
4	2483.50	48.2 AV	54.0	-5.8	2.11 V	191	51.6	-3.4
5	4924.00	45.6 PK	74.0	-28.4	1.00 V	198	44.0	1.6
6	4924.00	43.6 AV	54.0	-10.4	1.00 V	198	42.0	1.6
7	7386.00	53.5 PK	74.0	-20.5	1.10 V	303	45.6	7.9
8	7386.00	49.5 AV	54.0	-4.5	1.10 V	303	41.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

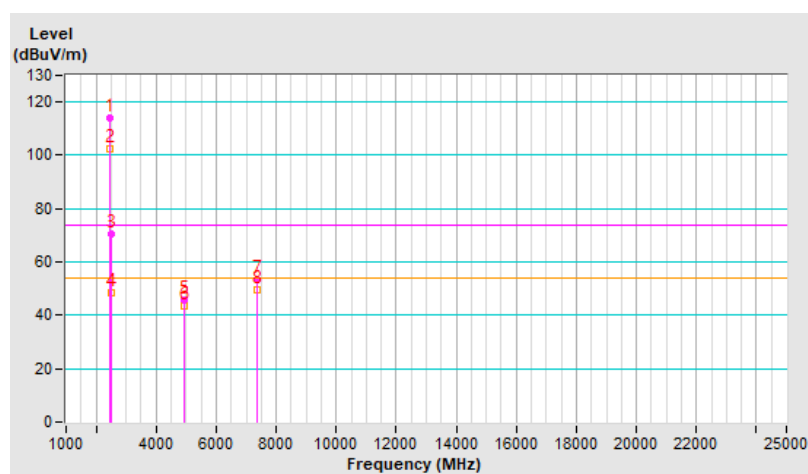


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.3 PK			1.93 H	147	118.7	-3.4
2	*2467.00	104.1 AV			1.93 H	147	107.5	-3.4
3	2483.50	63.8 PK	74.0	-10.2	1.93 H	147	67.2	-3.4
4	2483.50	47.6 AV	54.0	-6.4	1.93 H	147	51.0	-3.4
5	4934.00	47.0 PK	74.0	-27.0	1.07 H	172	45.4	1.6
6	4934.00	45.2 AV	54.0	-8.8	1.07 H	172	43.6	1.6
7	7401.00	54.5 PK	74.0	-19.5	1.16 H	224	46.6	7.9
8	7401.00	50.9 AV	54.0	-3.1	1.16 H	224	43.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

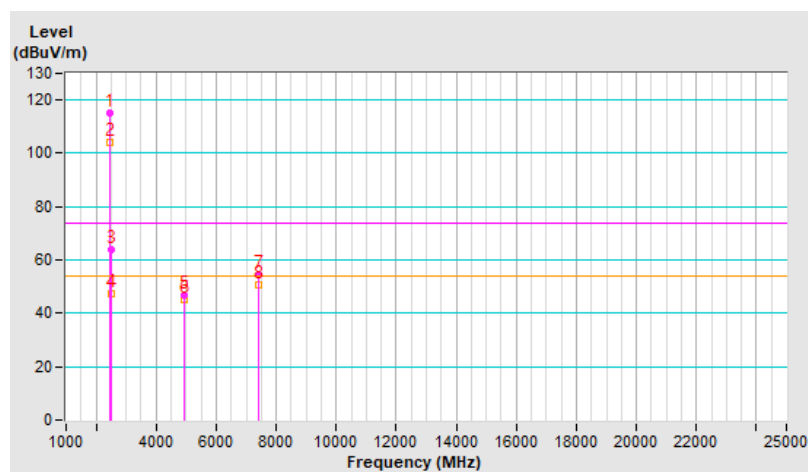


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.9 PK			2.16 V	211	116.3	-3.4
2	*2467.00	100.7 AV			2.16 V	211	104.1	-3.4
3	2483.50	58.4 PK	74.0	-15.6	2.16 V	211	61.8	-3.4
4	2483.50	44.0 AV	54.0	-10.0	2.16 V	211	47.4	-3.4
5	4934.00	45.9 PK	74.0	-28.1	1.00 V	219	44.3	1.6
6	4934.00	43.5 AV	54.0	-10.5	1.00 V	219	41.9	1.6
7	7401.00	54.6 PK	74.0	-19.4	1.20 V	296	46.7	7.9
8	7401.00	50.2 AV	54.0	-3.8	1.20 V	296	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

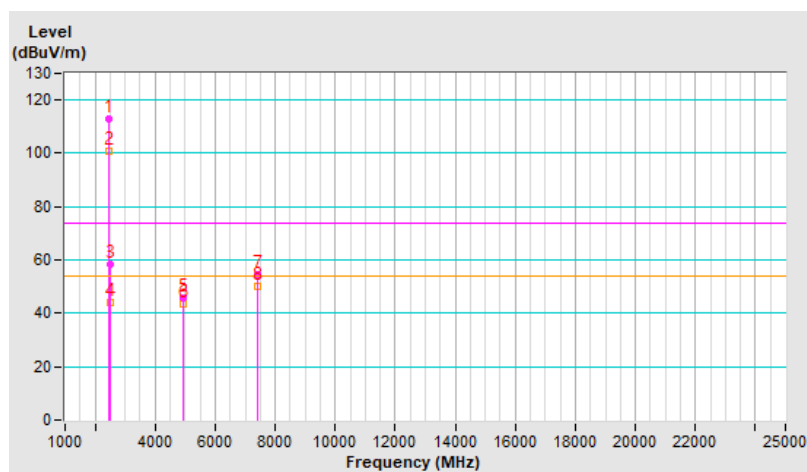


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.5 PK			1.91 H	139	116.9	-3.4
2	*2472.00	101.2 AV			1.91 H	139	104.6	-3.4
3	2483.50	59.8 PK	74.0	-14.2	1.91 H	139	63.2	-3.4
4	2483.50	46.5 AV	54.0	-7.5	1.91 H	139	49.9	-3.4
5	4944.00	47.0 PK	74.0	-27.0	1.00 H	186	45.4	1.6
6	4944.00	45.2 AV	54.0	-8.8	1.00 H	186	43.6	1.6
7	7416.00	54.7 PK	74.0	-19.3	1.08 H	227	46.9	7.8
8	7416.00	50.8 AV	54.0	-3.2	1.08 H	227	43.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

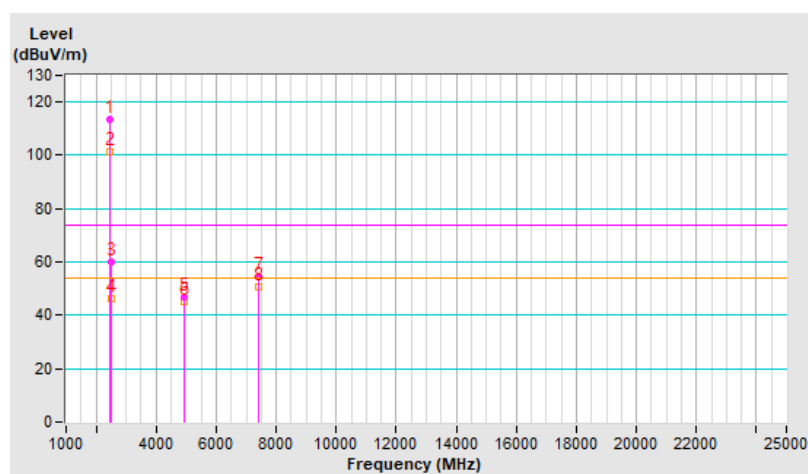


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.3 PK			2.11 V	193	112.7	-3.4
2	*2472.00	98.1 AV			2.11 V	193	101.5	-3.4
3	2483.50	58.8 PK	74.0	-15.2	2.11 V	193	62.2	-3.4
4	2483.50	46.1 AV	54.0	-7.9	2.11 V	193	49.5	-3.4
5	4944.00	45.9 PK	74.0	-28.1	1.00 V	195	44.3	1.6
6	4944.00	43.7 AV	54.0	-10.3	1.00 V	195	42.1	1.6
7	7416.00	54.4 PK	74.0	-19.6	1.14 V	288	46.6	7.8
8	7416.00	49.9 AV	54.0	-4.1	1.14 V	288	42.1	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

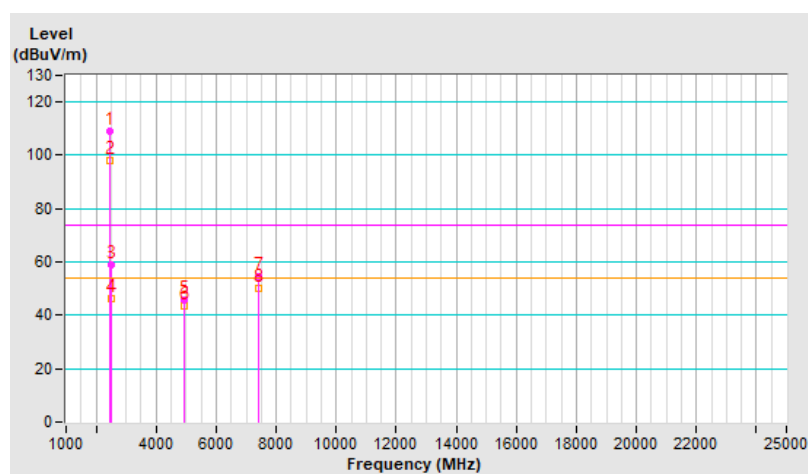


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.6 PK	74.0	-8.4	1.84 H	140	69.2	-3.6
2	2390.00	47.5 AV	54.0	-6.5	1.84 H	140	51.1	-3.6
3	*2412.00	115.7 PK			1.84 H	140	119.2	-3.5
4	*2412.00	101.2 AV			1.84 H	140	104.7	-3.5
5	4824.00	47.9 PK	74.0	-26.1	1.13 H	154	46.2	1.7
6	4824.00	46.0 AV	54.0	-8.0	1.13 H	154	44.3	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

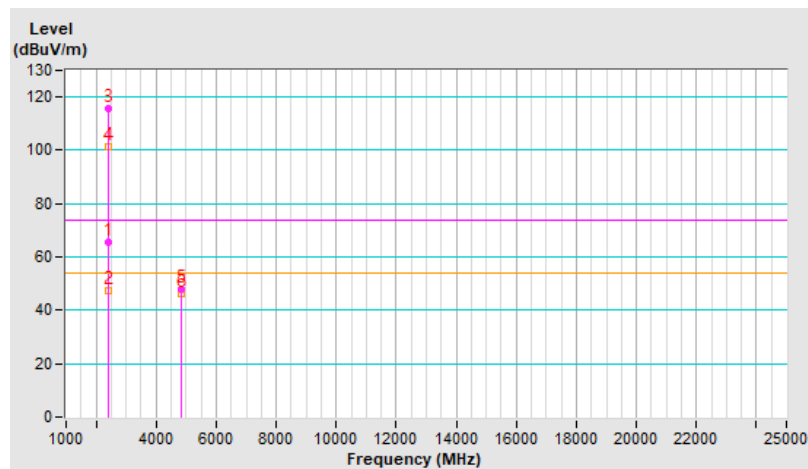


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	2.10 V	186	70.1	-3.6
2	2390.00	45.5 AV	54.0	-8.5	2.10 V	186	49.1	-3.6
3	*2412.00	112.0 PK			2.10 V	186	115.5	-3.5
4	*2412.00	99.3 AV			2.10 V	186	102.8	-3.5
5	4824.00	46.8 PK	74.0	-27.2	1.00 V	191	45.1	1.7
6	4824.00	44.4 AV	54.0	-9.6	1.00 V	191	42.7	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

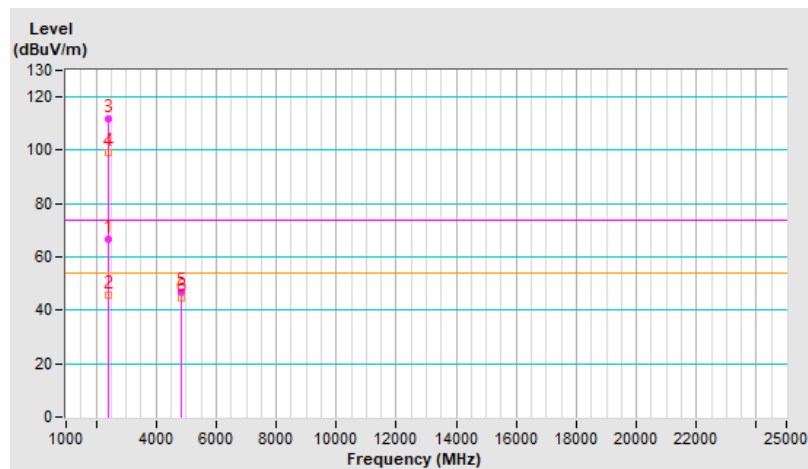


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.6 PK	74.0	-4.4	1.95 H	130	73.2	-3.6
2	2390.00	46.3 AV	54.0	-7.7	1.95 H	130	49.9	-3.6
3	*2437.00	118.9 PK			1.95 H	130	122.4	-3.5
4	*2437.00	105.6 AV			1.95 H	130	109.1	-3.5
5	2483.50	62.3 PK	74.0	-11.7	1.95 H	130	65.7	-3.4
6	2483.50	43.1 AV	54.0	-10.9	1.95 H	130	46.5	-3.4
7	4874.00	48.2 PK	74.0	-25.8	1.02 H	163	46.7	1.5
8	4874.00	46.4 AV	54.0	-7.6	1.02 H	163	44.9	1.5
9	7311.00	54.4 PK	74.0	-19.6	1.15 H	231	46.8	7.6
10	7311.00	51.1 AV	54.0	-2.9	1.15 H	231	43.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

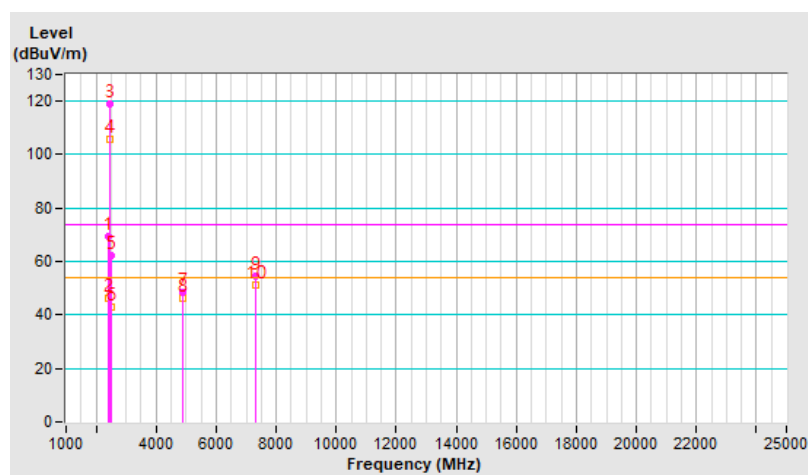


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.5 PK	74.0	-5.5	2.16 V	184	72.1	-3.6
2	2390.00	45.2 AV	54.0	-8.8	2.16 V	184	48.8	-3.6
3	*2437.00	115.3 PK			2.16 V	184	118.8	-3.5
4	*2437.00	102.8 AV			2.16 V	184	106.3	-3.5
5	2483.50	61.5 PK	74.0	-12.5	2.16 V	184	64.9	-3.4
6	2483.50	42.9 AV	54.0	-11.1	2.16 V	184	46.3	-3.4
7	4874.00	45.4 PK	74.0	-28.6	1.00 V	222	43.9	1.5
8	4874.00	43.4 AV	54.0	-10.6	1.00 V	222	41.9	1.5
9	7311.00	54.1 PK	74.0	-19.9	1.22 V	292	46.5	7.6
10	7311.00	49.8 AV	54.0	-4.2	1.22 V	292	42.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

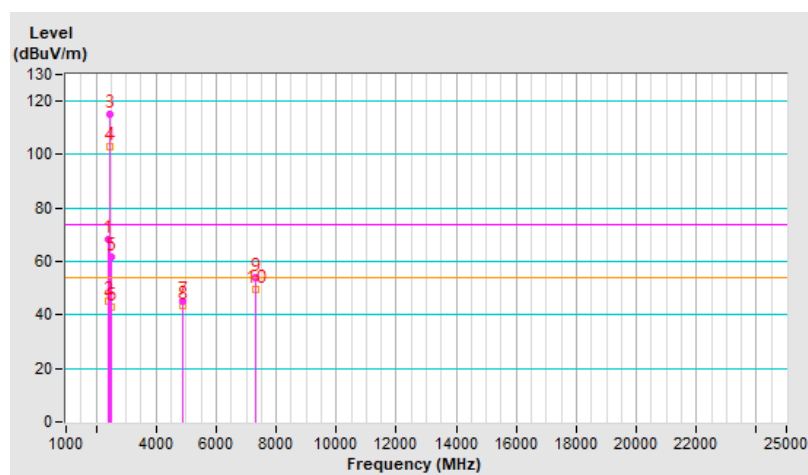


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.5 PK			1.94 H	141	117.0	-3.5
2	*2462.00	101.3 AV			1.94 H	141	104.8	-3.5
3	2483.50	61.1 PK	74.0	-12.9	1.94 H	141	64.5	-3.4
4	2483.50	46.0 AV	54.0	-8.0	1.94 H	141	49.4	-3.4
5	4924.00	47.5 PK	74.0	-26.5	1.05 H	178	45.9	1.6
6	4924.00	45.9 AV	54.0	-8.1	1.05 H	178	44.3	1.6
7	7386.00	54.1 PK	74.0	-19.9	1.08 H	228	46.2	7.9
8	7386.00	50.2 AV	54.0	-3.8	1.08 H	228	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

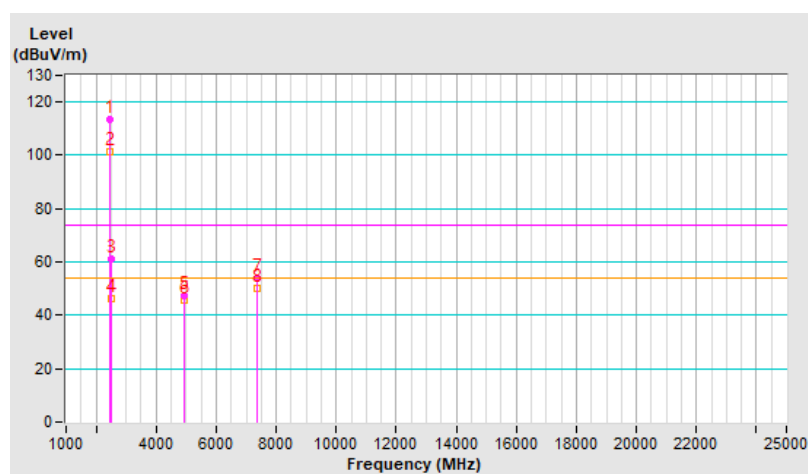


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.7 PK			2.17 V	194	112.2	-3.5
2	*2462.00	98.0 AV			2.17 V	194	101.5	-3.5
3	2483.50	59.0 PK	74.0	-15.0	2.17 V	194	62.4	-3.4
4	2483.50	44.5 AV	54.0	-9.5	2.17 V	194	47.9	-3.4
5	4924.00	46.1 PK	74.0	-27.9	1.00 V	192	44.5	1.6
6	4924.00	43.9 AV	54.0	-10.1	1.00 V	192	42.3	1.6
7	7386.00	53.7 PK	74.0	-20.3	1.21 V	305	45.8	7.9
8	7386.00	49.4 AV	54.0	-4.6	1.21 V	305	41.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

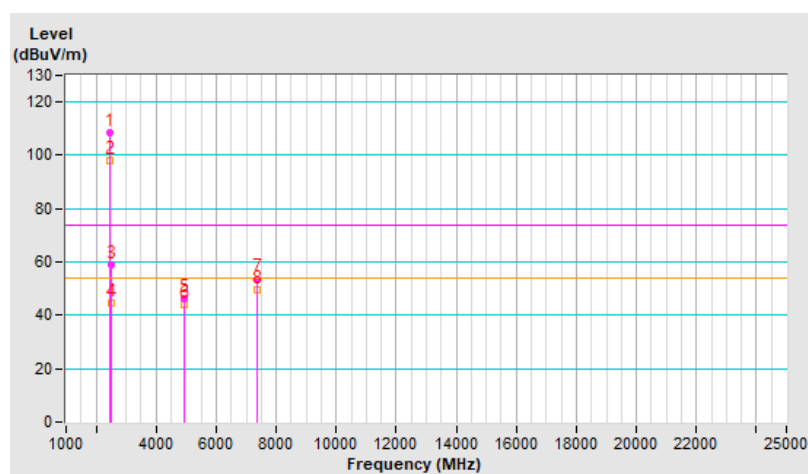


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.8 PK			1.85 H	130	115.2	-3.4
2	*2467.00	99.5 AV			1.85 H	130	102.9	-3.4
3	2483.50	57.5 PK	74.0	-16.5	1.85 H	130	60.9	-3.4
4	2483.50	45.3 AV	54.0	-8.7	1.85 H	130	48.7	-3.4
5	4934.00	47.9 PK	74.0	-26.1	1.03 H	173	46.3	1.6
6	4934.00	46.0 AV	54.0	-8.0	1.03 H	173	44.4	1.6
7	7401.00	54.3 PK	74.0	-19.7	1.18 H	217	46.4	7.9
8	7401.00	50.9 AV	54.0	-3.1	1.18 H	217	43.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

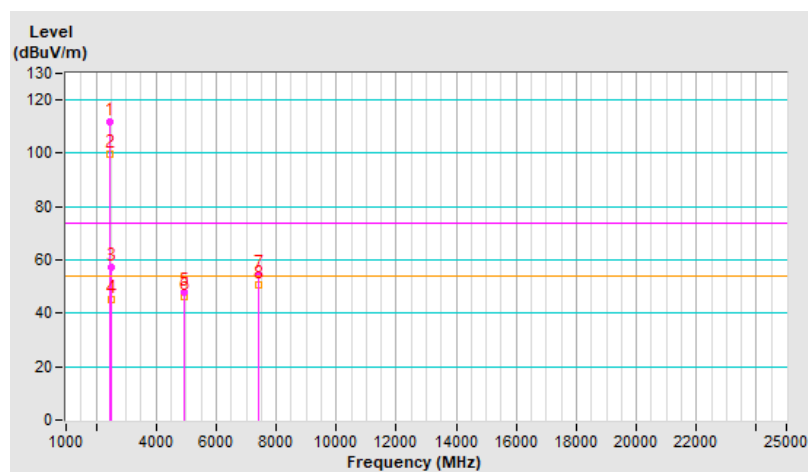


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.8 PK			2.16 V	198	111.2	-3.4
2	*2467.00	96.5 AV			2.16 V	198	99.9	-3.4
3	2483.50	56.5 PK	74.0	-17.5	2.16 V	198	59.9	-3.4
4	2483.50	43.1 AV	54.0	-10.9	2.16 V	198	46.5	-3.4
5	4934.00	45.8 PK	74.0	-28.2	1.00 V	196	44.2	1.6
6	4934.00	44.0 AV	54.0	-10.0	1.00 V	196	42.4	1.6
7	7401.00	54.0 PK	74.0	-20.0	1.20 V	298	46.1	7.9
8	7401.00	49.7 AV	54.0	-4.3	1.20 V	298	41.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

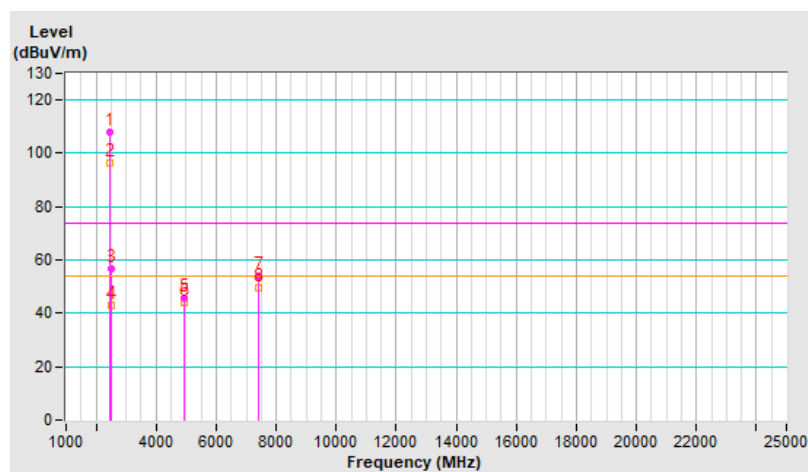


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.4 PK			1.89 H	144	112.8	-3.4
2	*2472.00	98.4 AV			1.89 H	144	101.8	-3.4
3	2483.50	61.5 PK	74.0	-12.5	1.89 H	144	64.9	-3.4
4	2483.50	48.6 AV	54.0	-5.4	1.89 H	144	52.0	-3.4
5	4944.00	47.3 PK	74.0	-26.7	1.10 H	162	45.7	1.6
6	4944.00	45.6 AV	54.0	-8.4	1.10 H	162	44.0	1.6
7	7416.00	53.8 PK	74.0	-20.2	1.07 H	247	46.0	7.8
8	7416.00	50.0 AV	54.0	-4.0	1.07 H	247	42.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

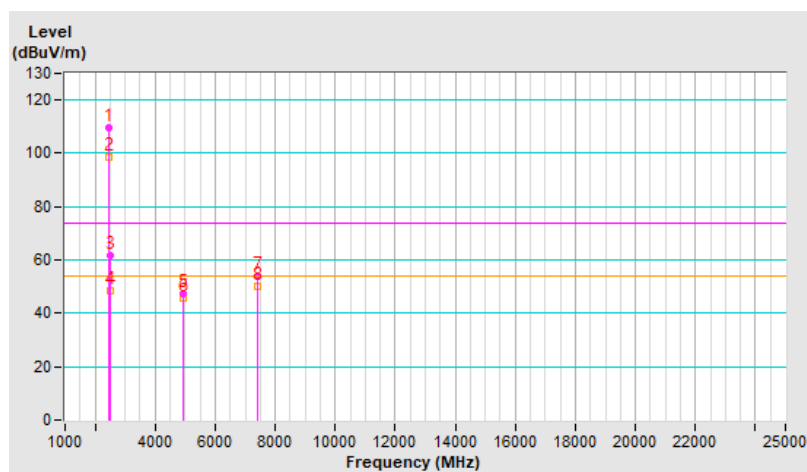


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 65 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.4 PK			2.10 V	190	109.8	-3.4
2	*2472.00	94.8 AV			2.10 V	190	98.2	-3.4
3	2483.50	59.2 PK	74.0	-14.8	2.10 V	190	62.6	-3.4
4	2483.50	45.3 AV	54.0	-8.7	2.10 V	190	48.7	-3.4
5	4944.00	45.7 PK	74.0	-28.3	1.00 V	197	44.1	1.6
6	4944.00	43.7 AV	54.0	-10.3	1.00 V	197	42.1	1.6
7	7416.00	54.1 PK	74.0	-19.9	1.11 V	313	46.3	7.8
8	7416.00	49.8 AV	54.0	-4.2	1.11 V	313	42.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

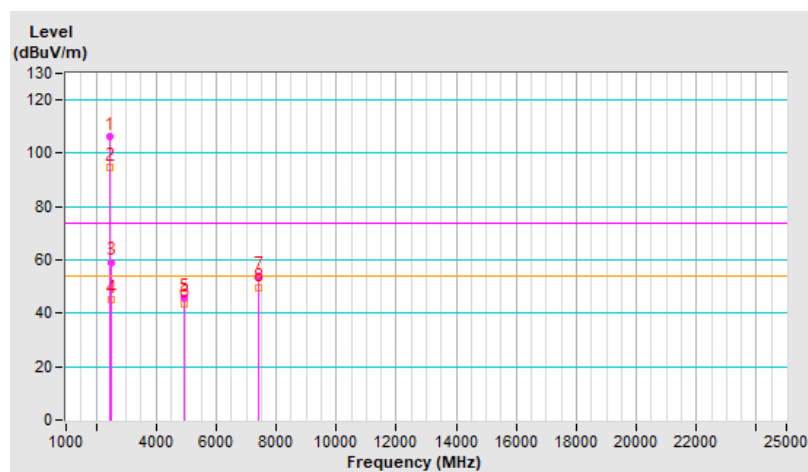


Plot of Band Edge


Mode A

1Tx


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

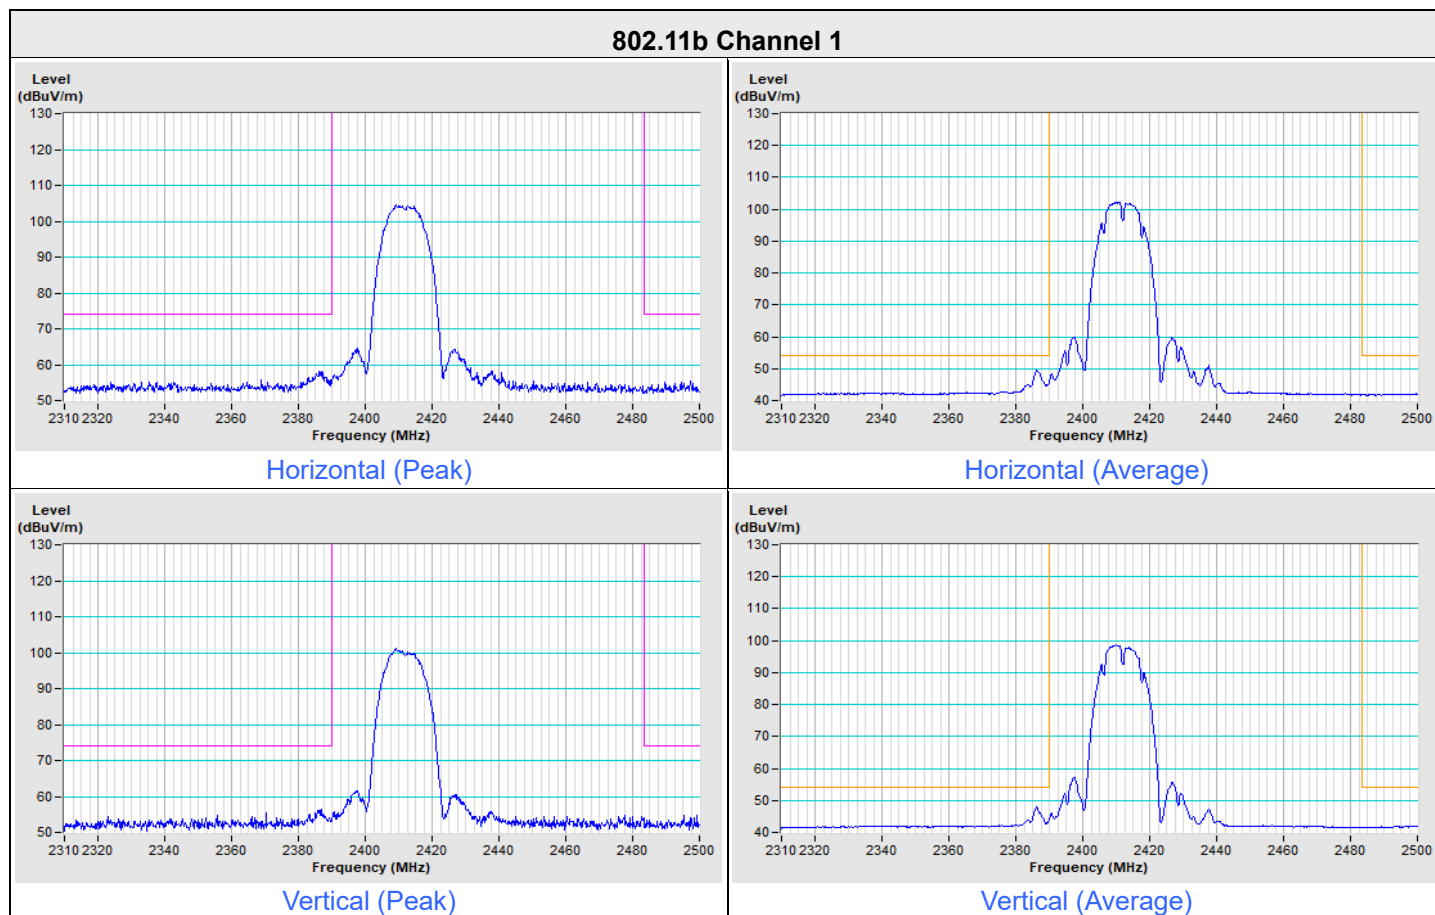


802.11b Channel 11

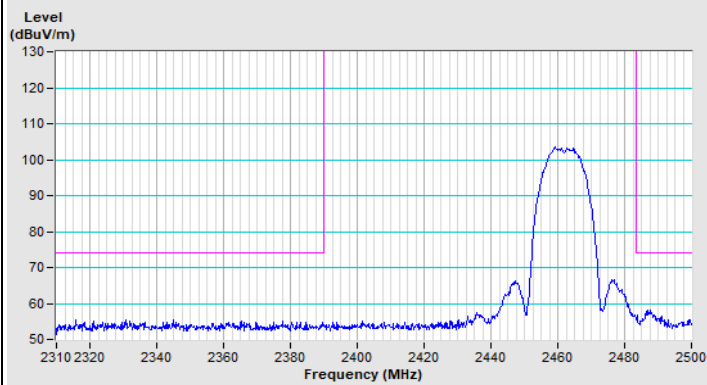


Horizontal (Peak)

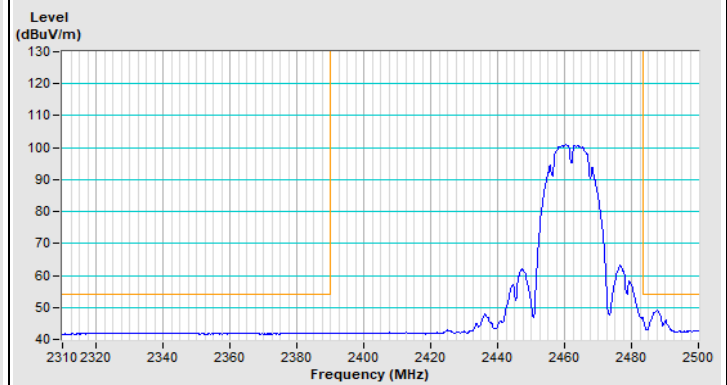

Horizontal (Average)

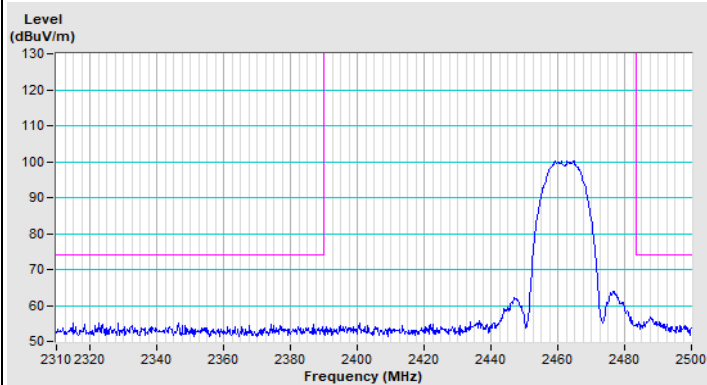


Vertical (Peak)

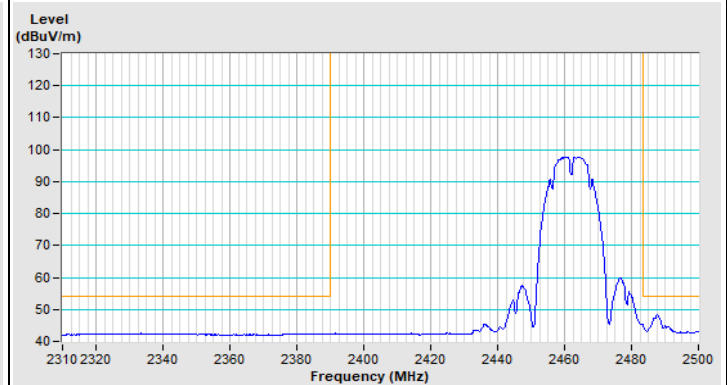


Vertical (Average)


802.11b Channel 12

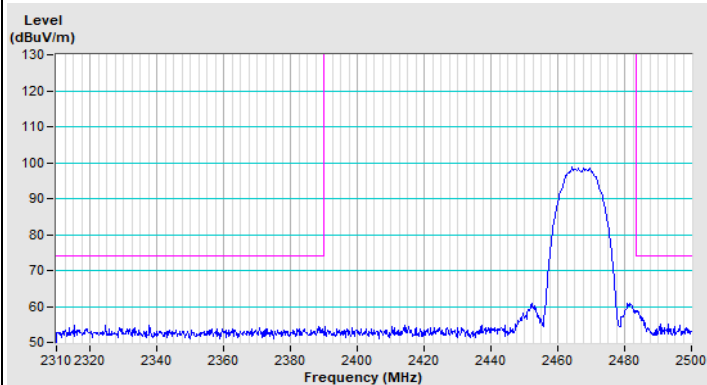


Horizontal (Peak)

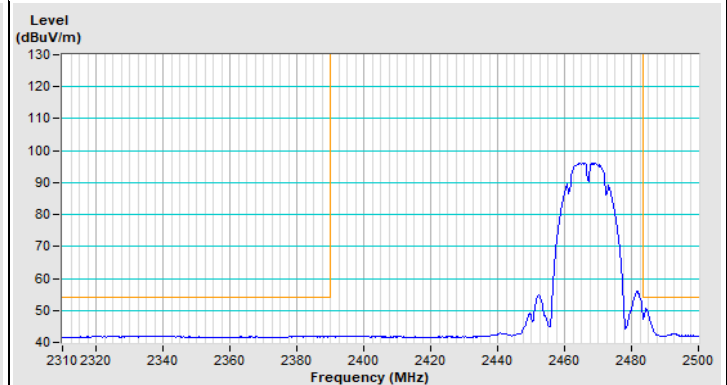

Horizontal (Average)

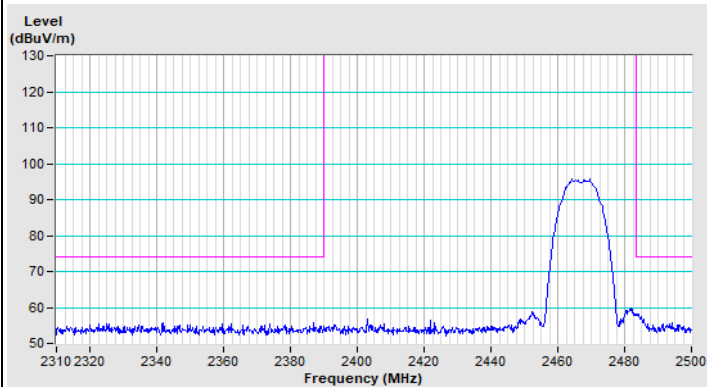


Vertical (Peak)

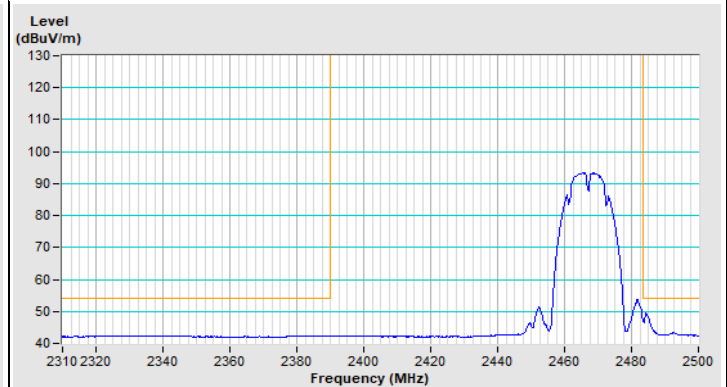


Vertical (Average)


802.11b Channel 13

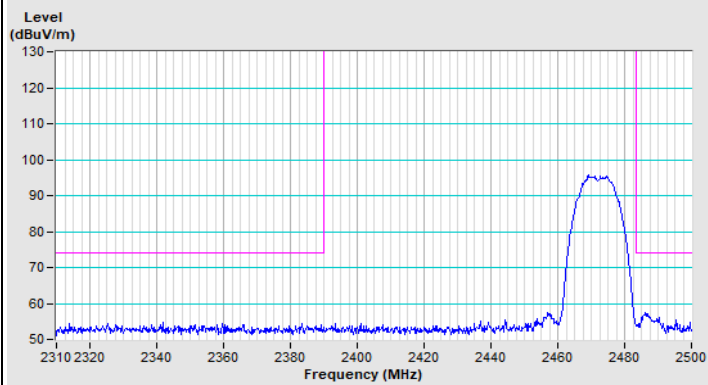


Horizontal (Peak)

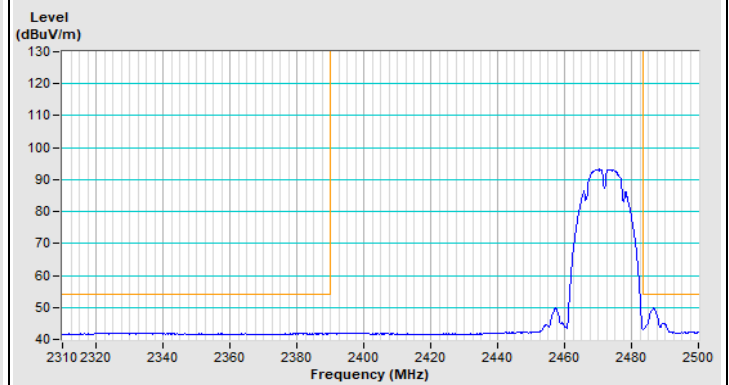

Horizontal (Average)

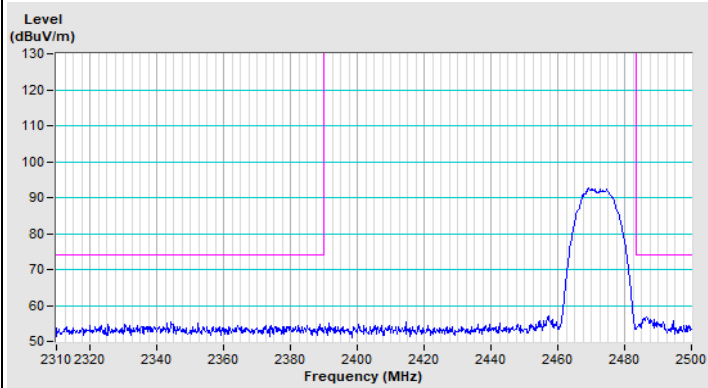


Vertical (Peak)

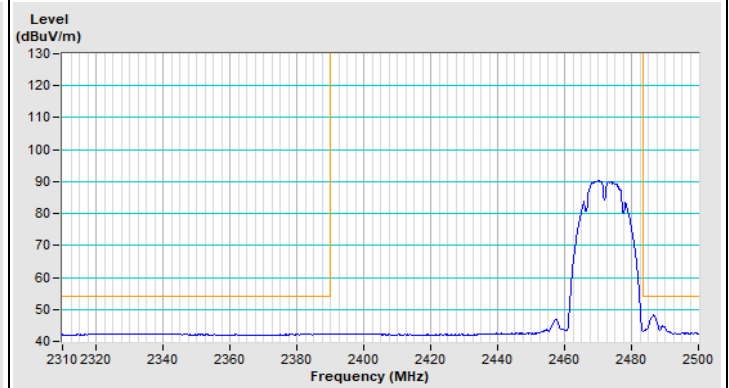


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11g Channel 1

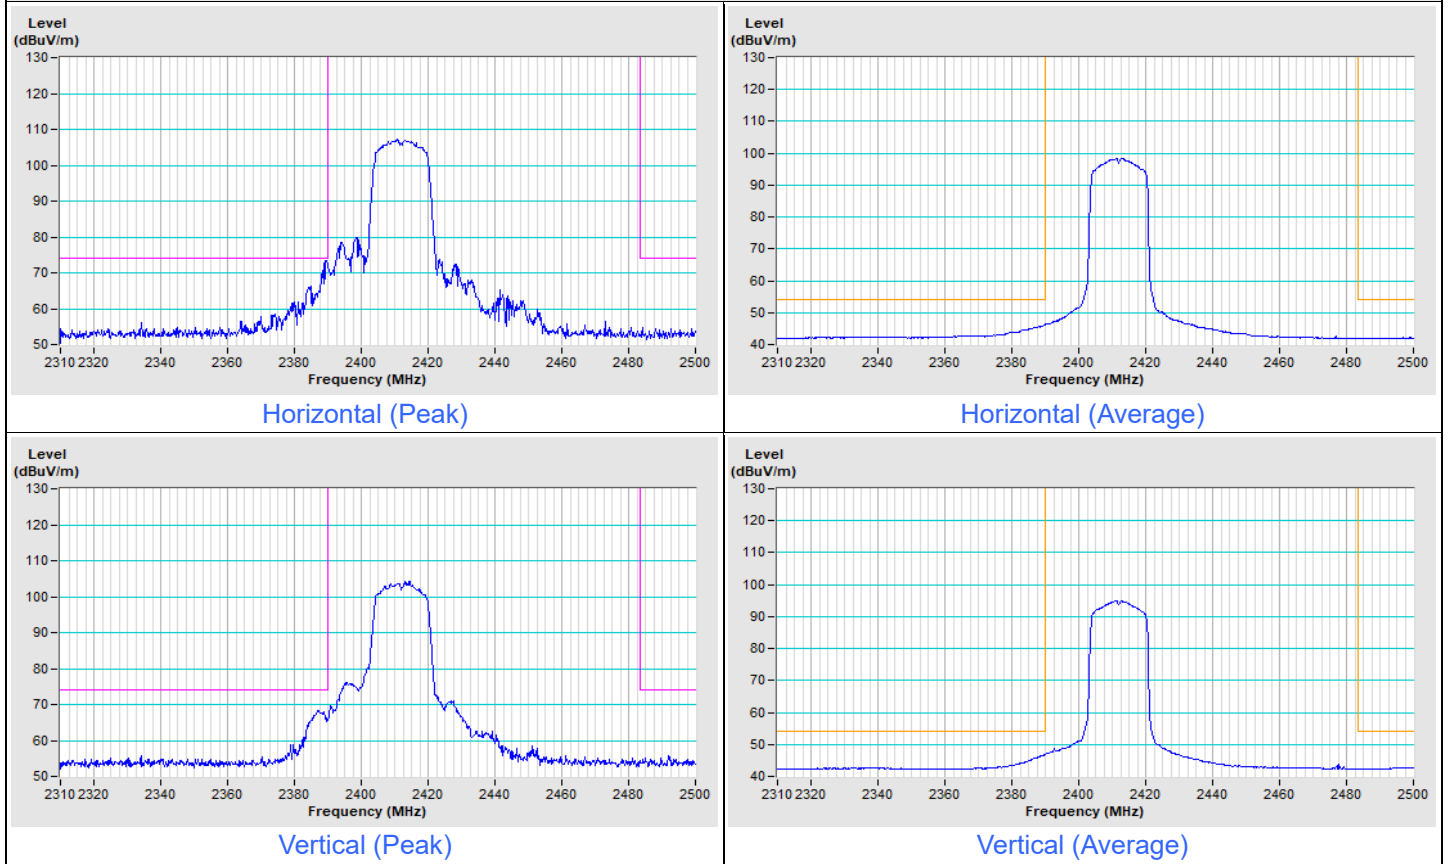


802.11g Channel 11

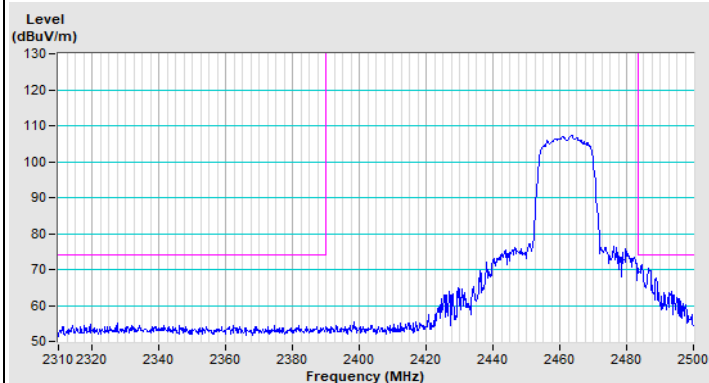


Horizontal (Peak)

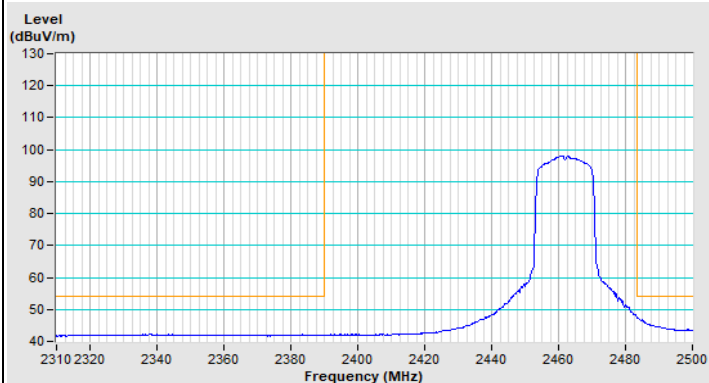

Horizontal (Average)

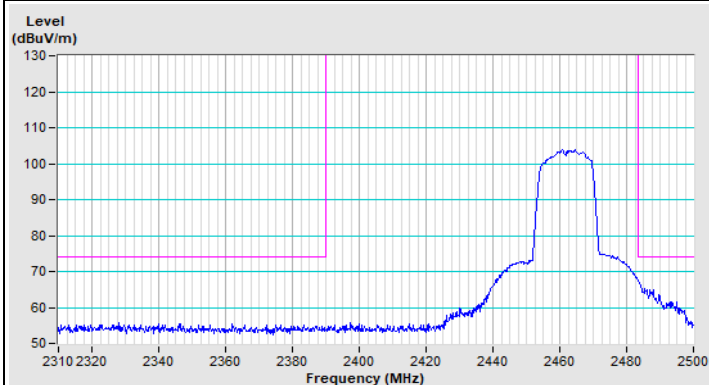


Vertical (Peak)

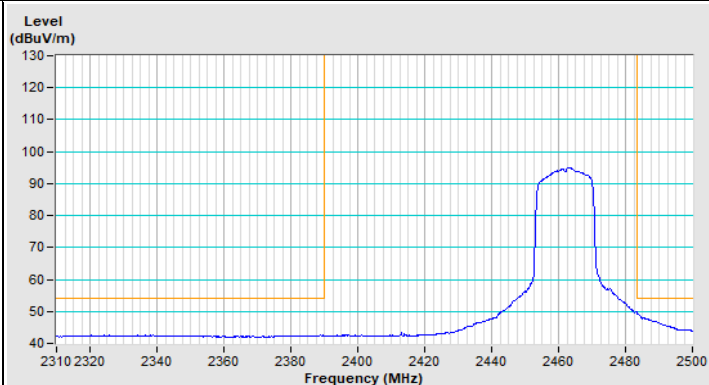


Vertical (Average)


802.11g Channel 12

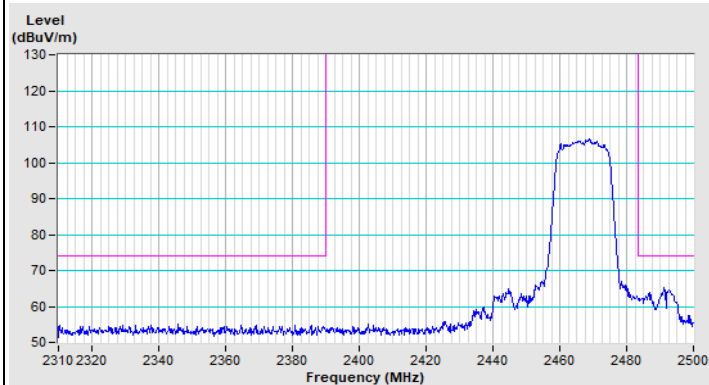


Horizontal (Peak)

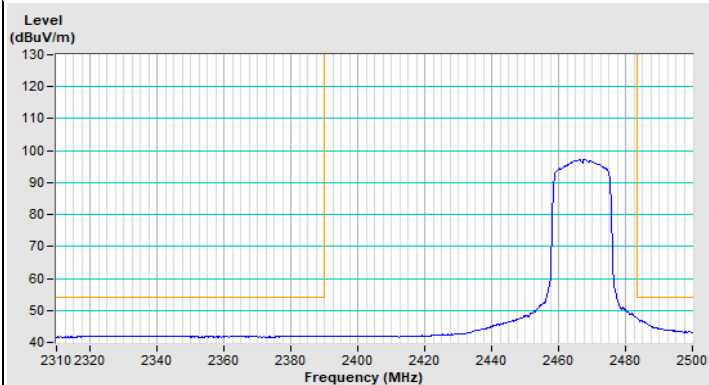


Horizontal (Average)

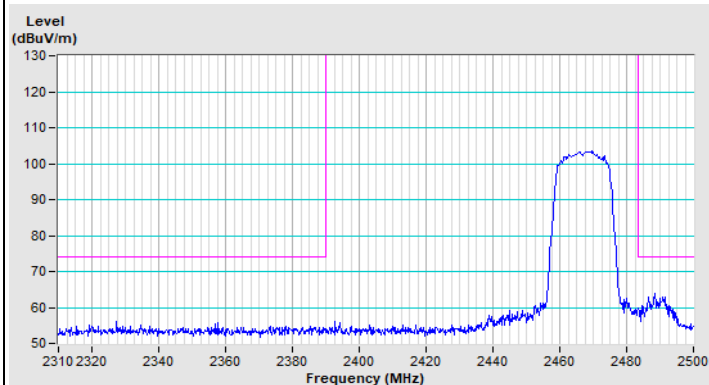


Vertical (Peak)

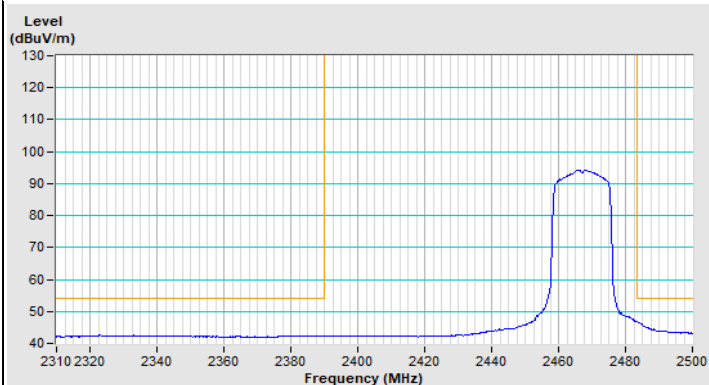


Vertical (Average)

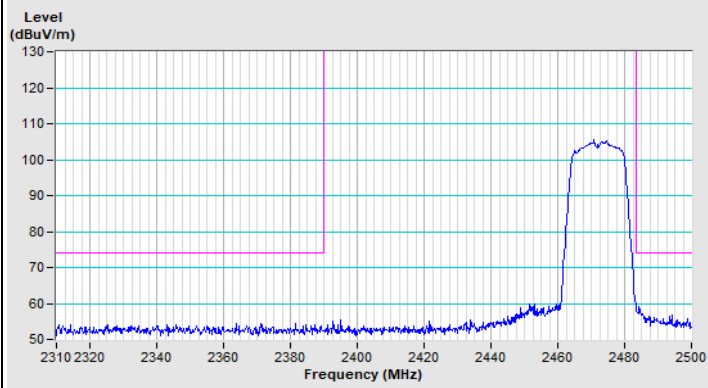802.11g Channel 13


Horizontal (Peak)

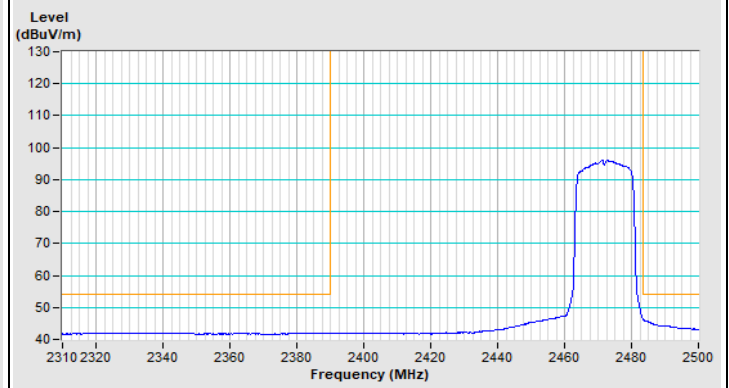

Horizontal (Average)

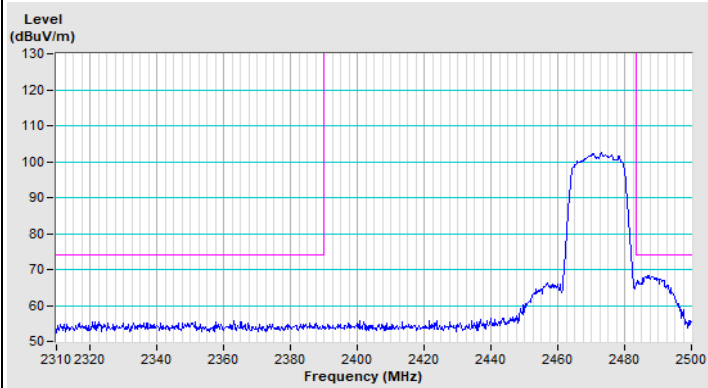


Vertical (Peak)

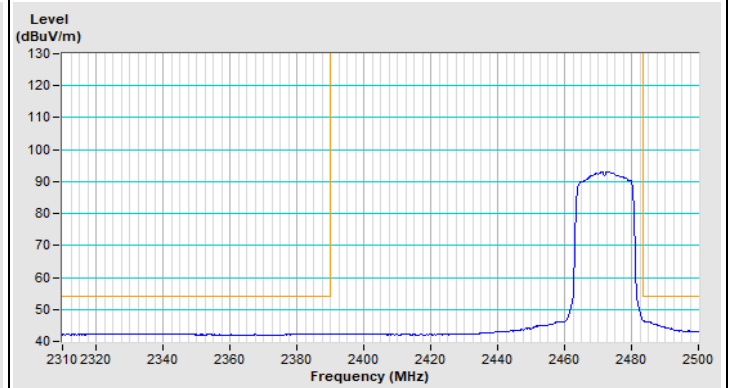


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 1

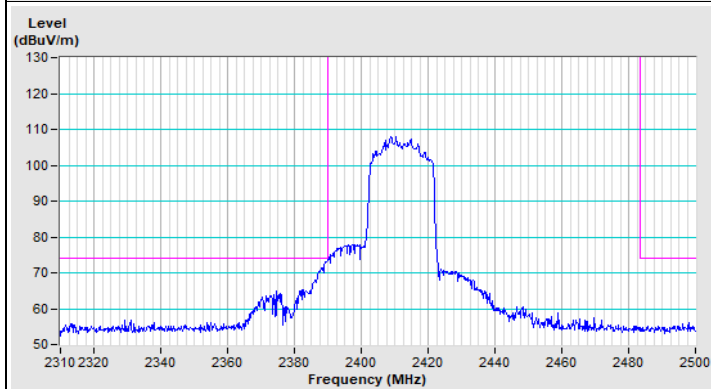


Horizontal (Peak)

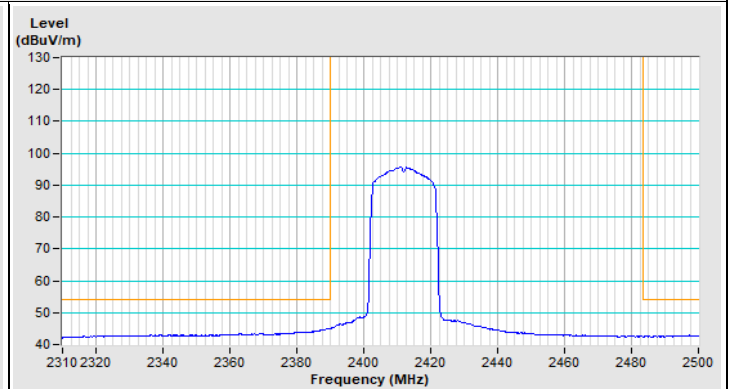

Horizontal (Average)

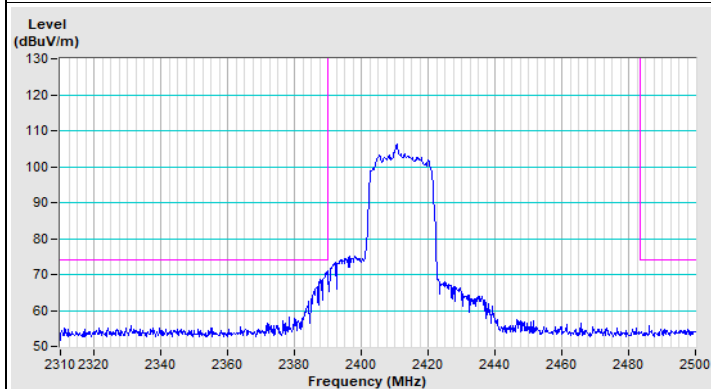


Vertical (Peak)

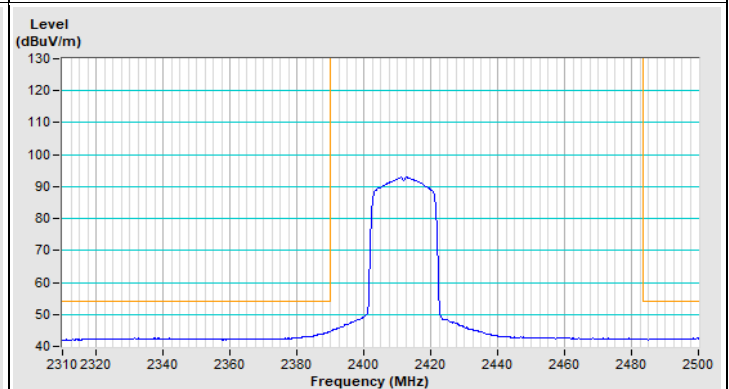


Vertical (Average)


802.11be (EHT20) Channel 11

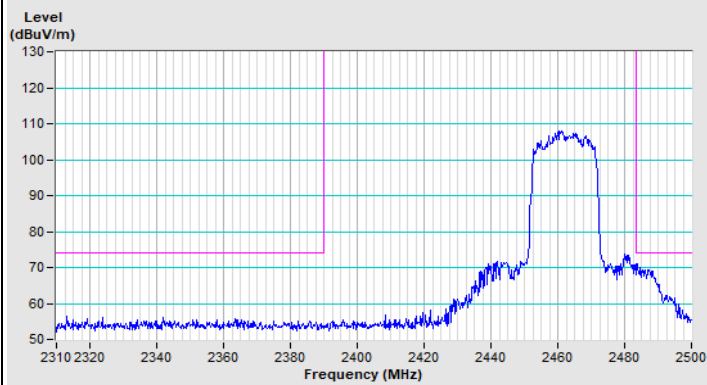


Horizontal (Peak)

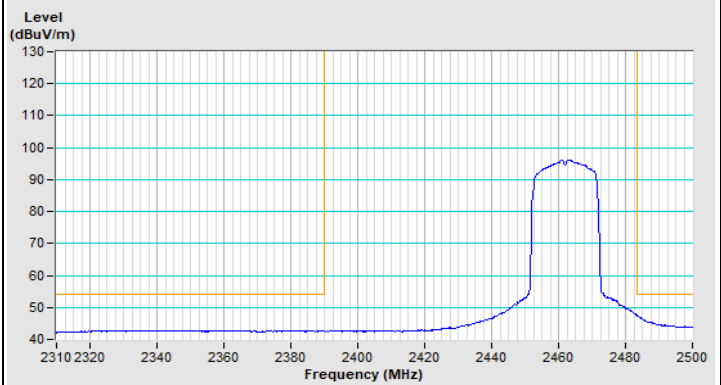

Horizontal (Average)

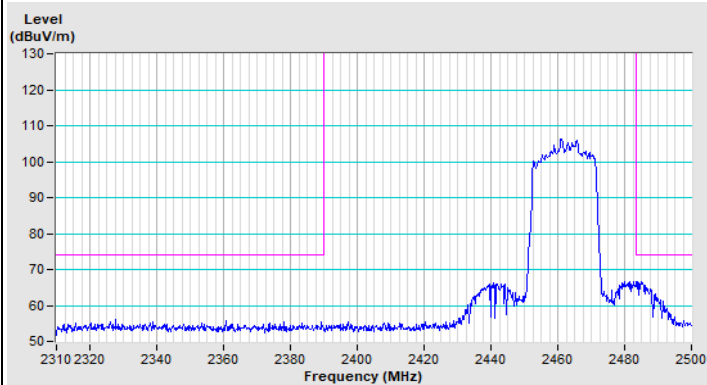


Vertical (Peak)

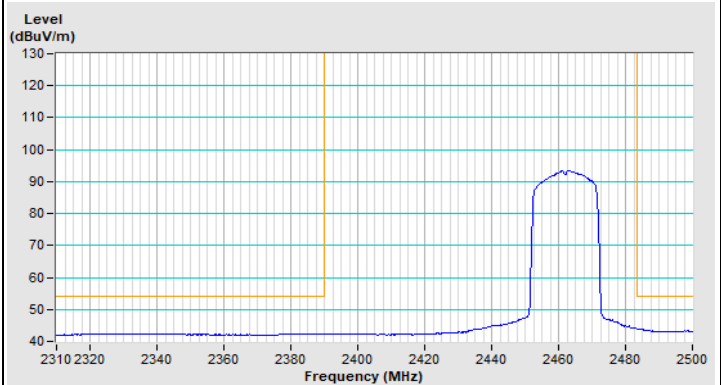


Vertical (Average)


802.11be (EHT20) Channel 12

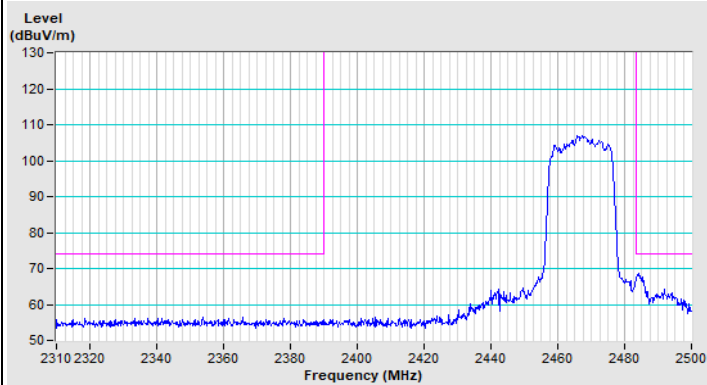


Horizontal (Peak)

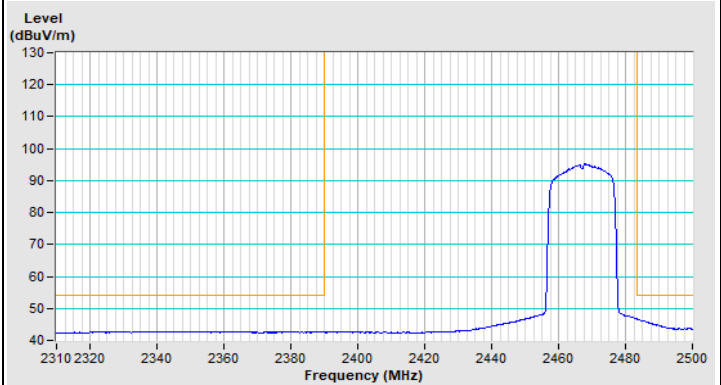

Horizontal (Average)

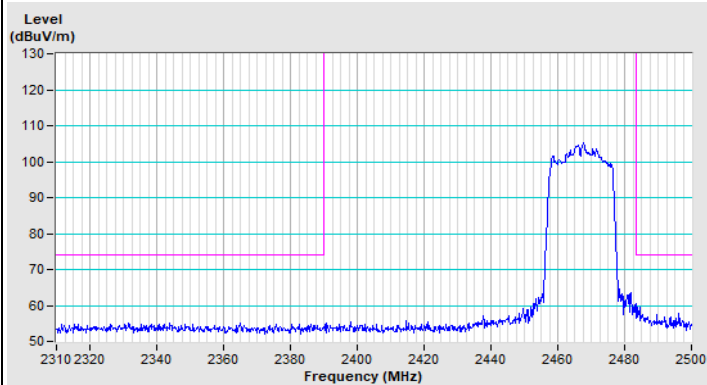


Vertical (Peak)

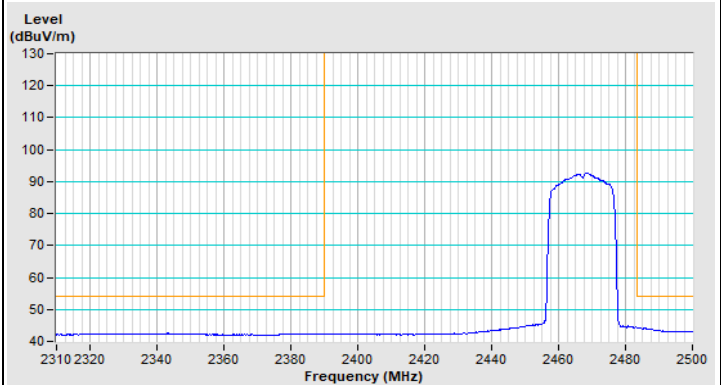


Vertical (Average)


802.11be (EHT20) Channel 13

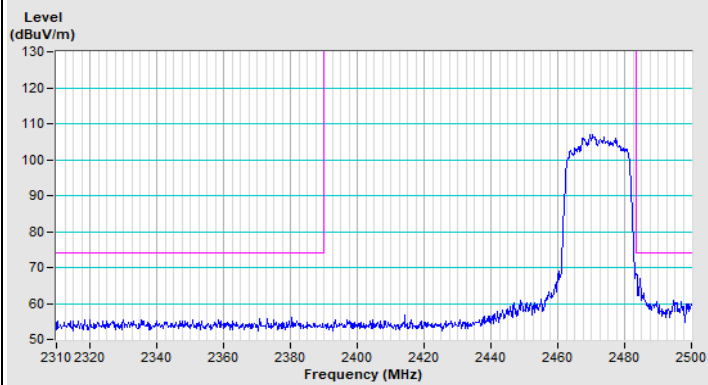


Horizontal (Peak)

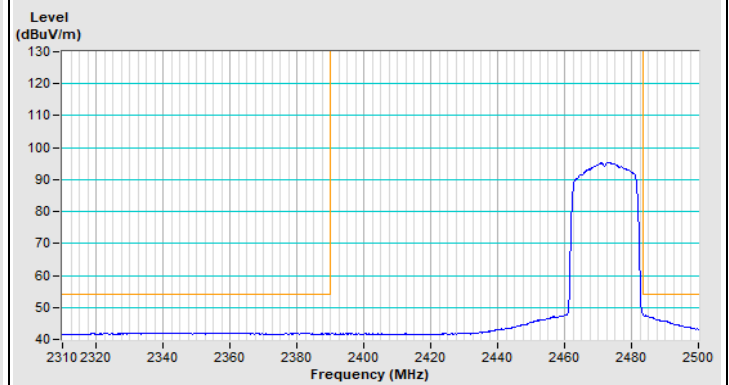

Horizontal (Average)

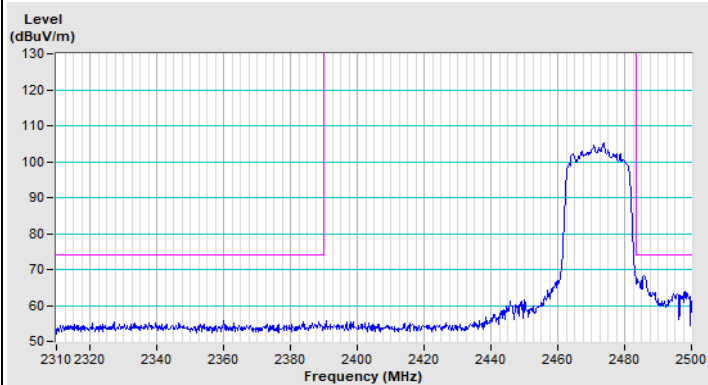


Vertical (Peak)

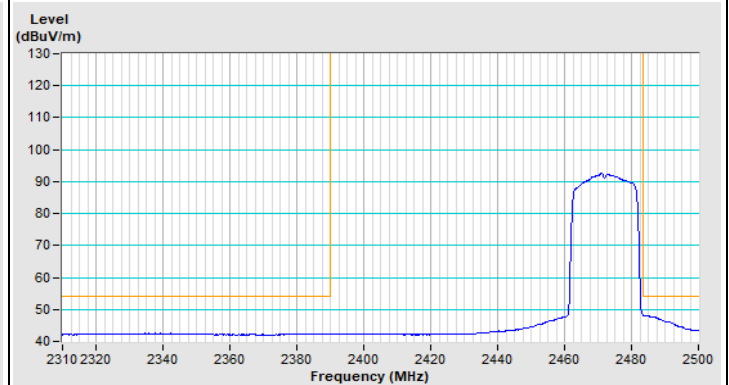


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 3

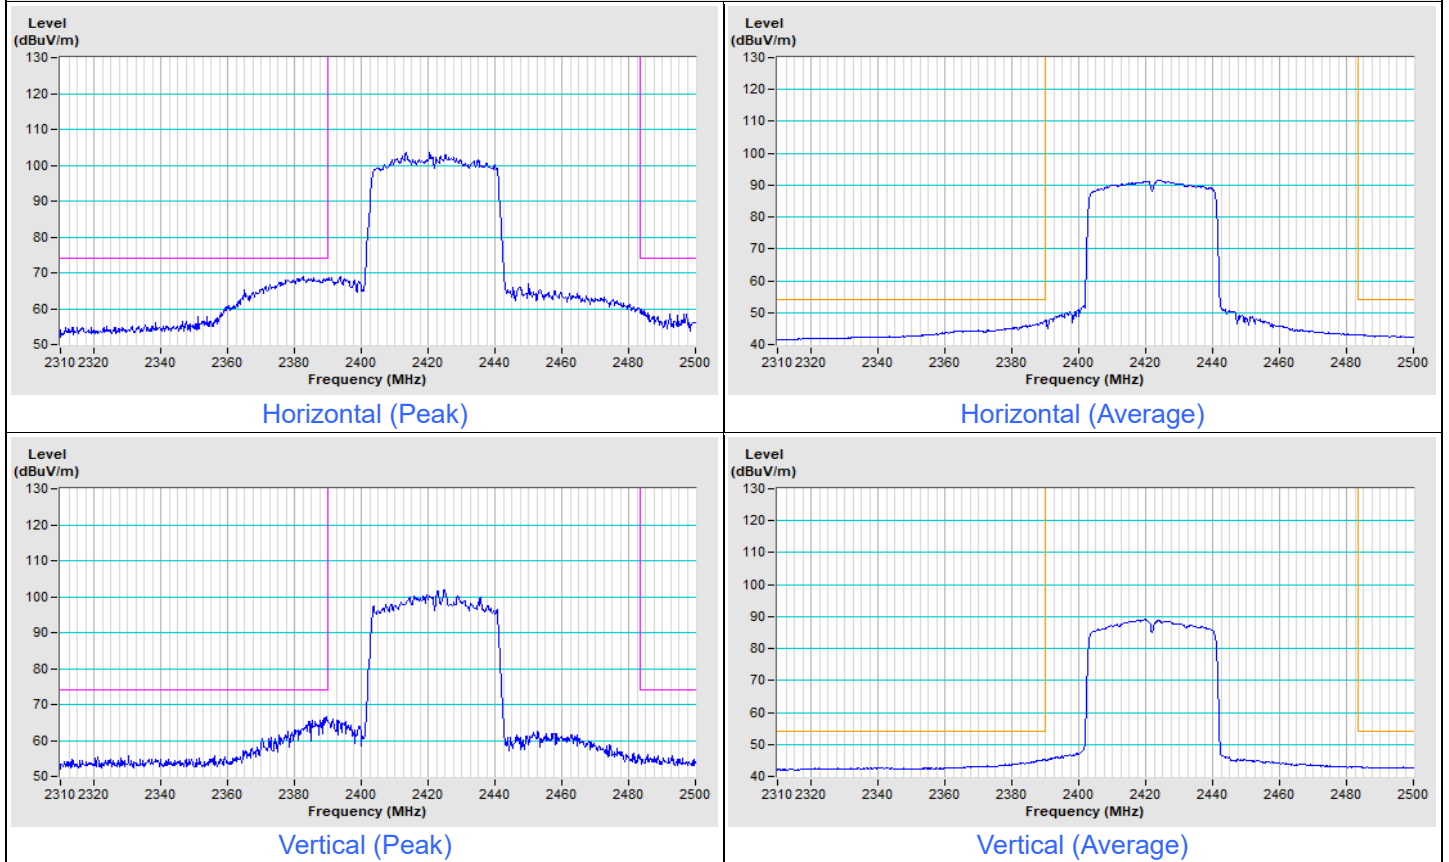


802.11be (EHT40) Channel 9

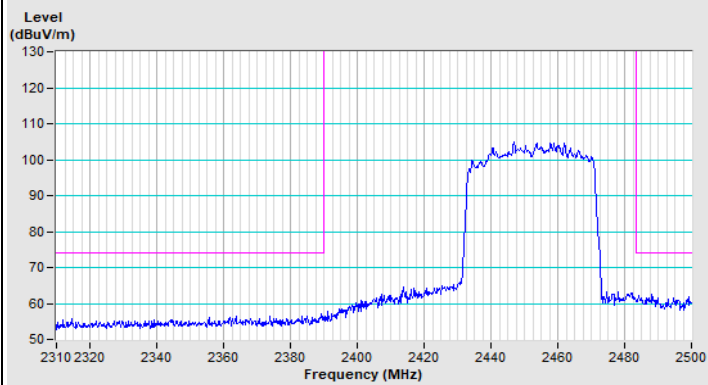


Horizontal (Peak)

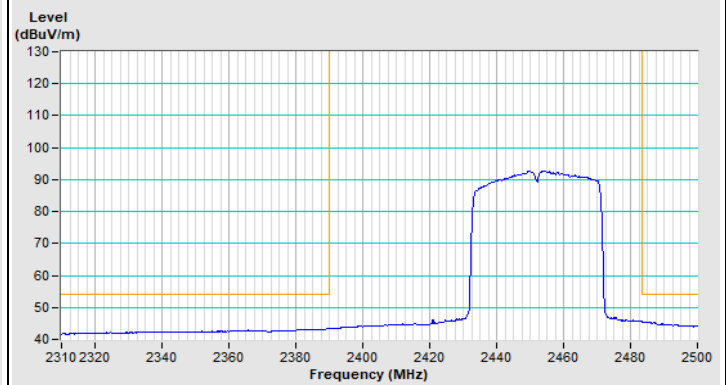

Horizontal (Average)

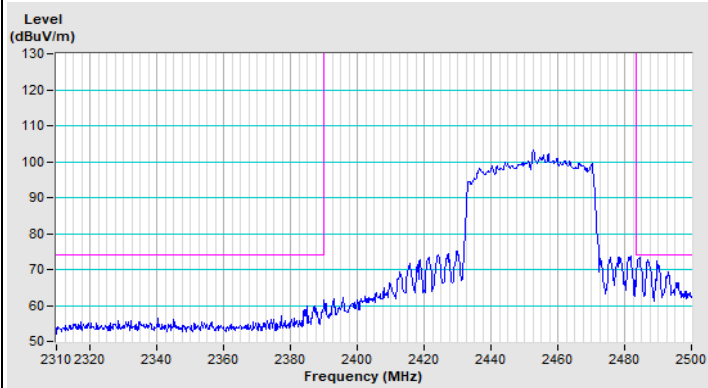


Vertical (Peak)

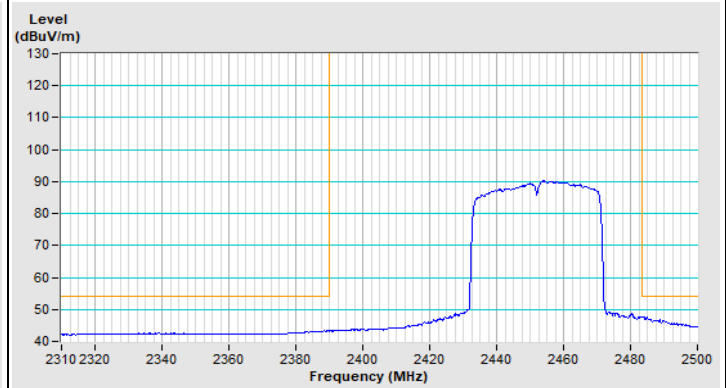


Vertical (Average)


802.11be (EHT40) Channel 10

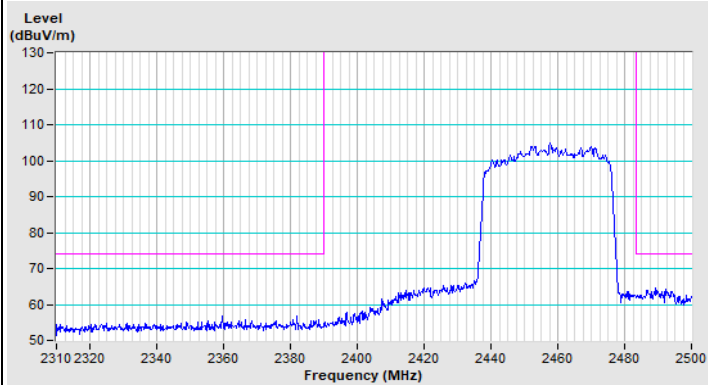


Horizontal (Peak)

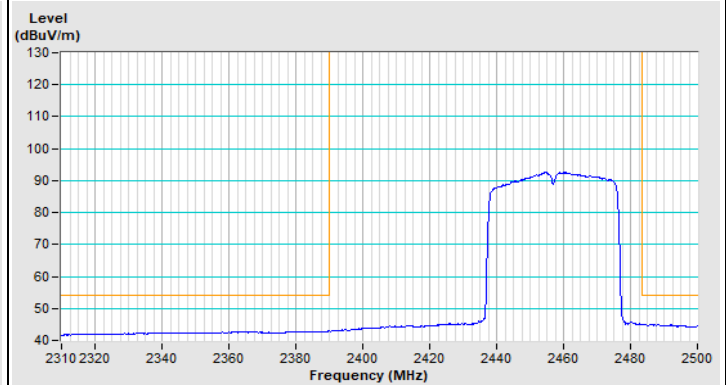

Horizontal (Average)

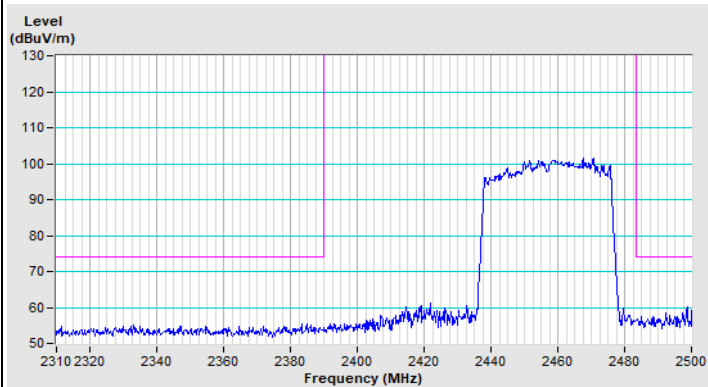


Vertical (Peak)

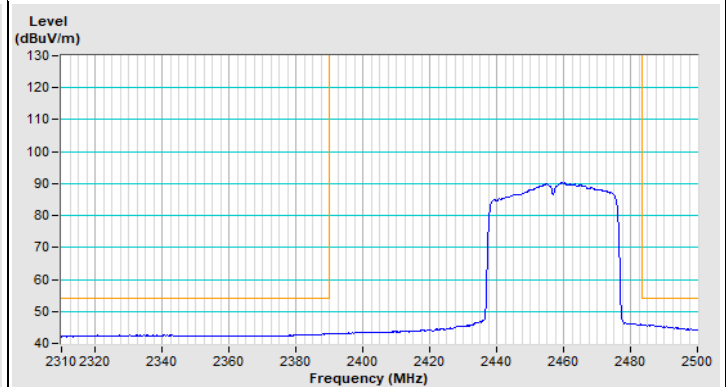


Vertical (Average)


802.11be (EHT40) Channel 11

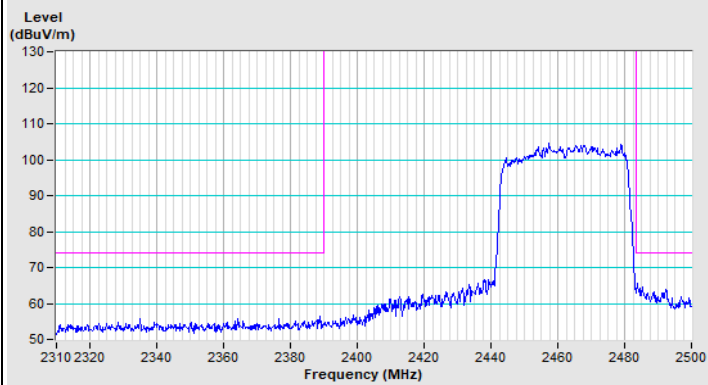


Horizontal (Peak)

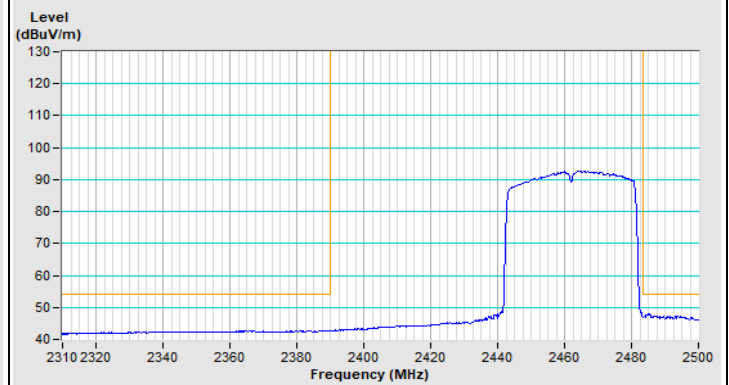

Horizontal (Average)

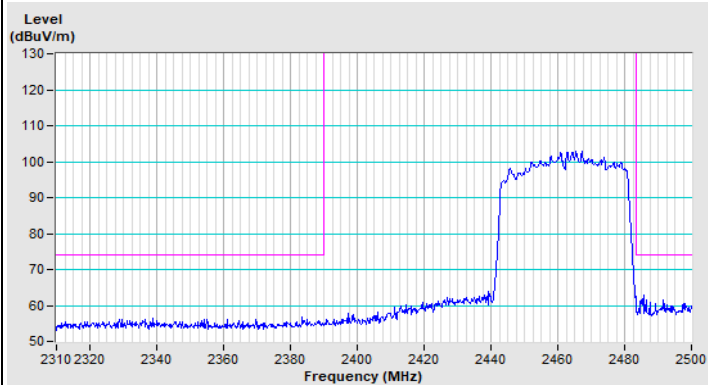


Vertical (Peak)

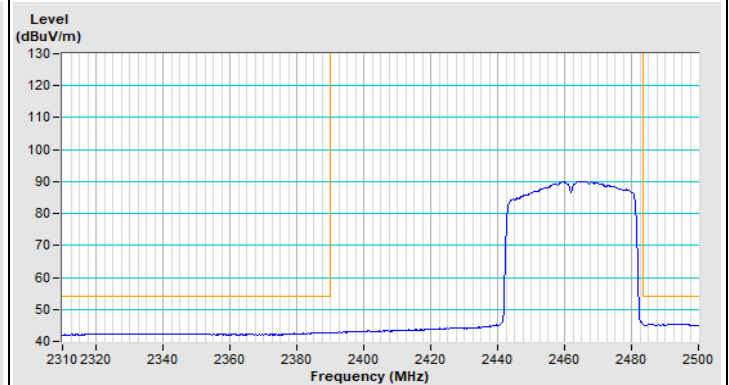


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

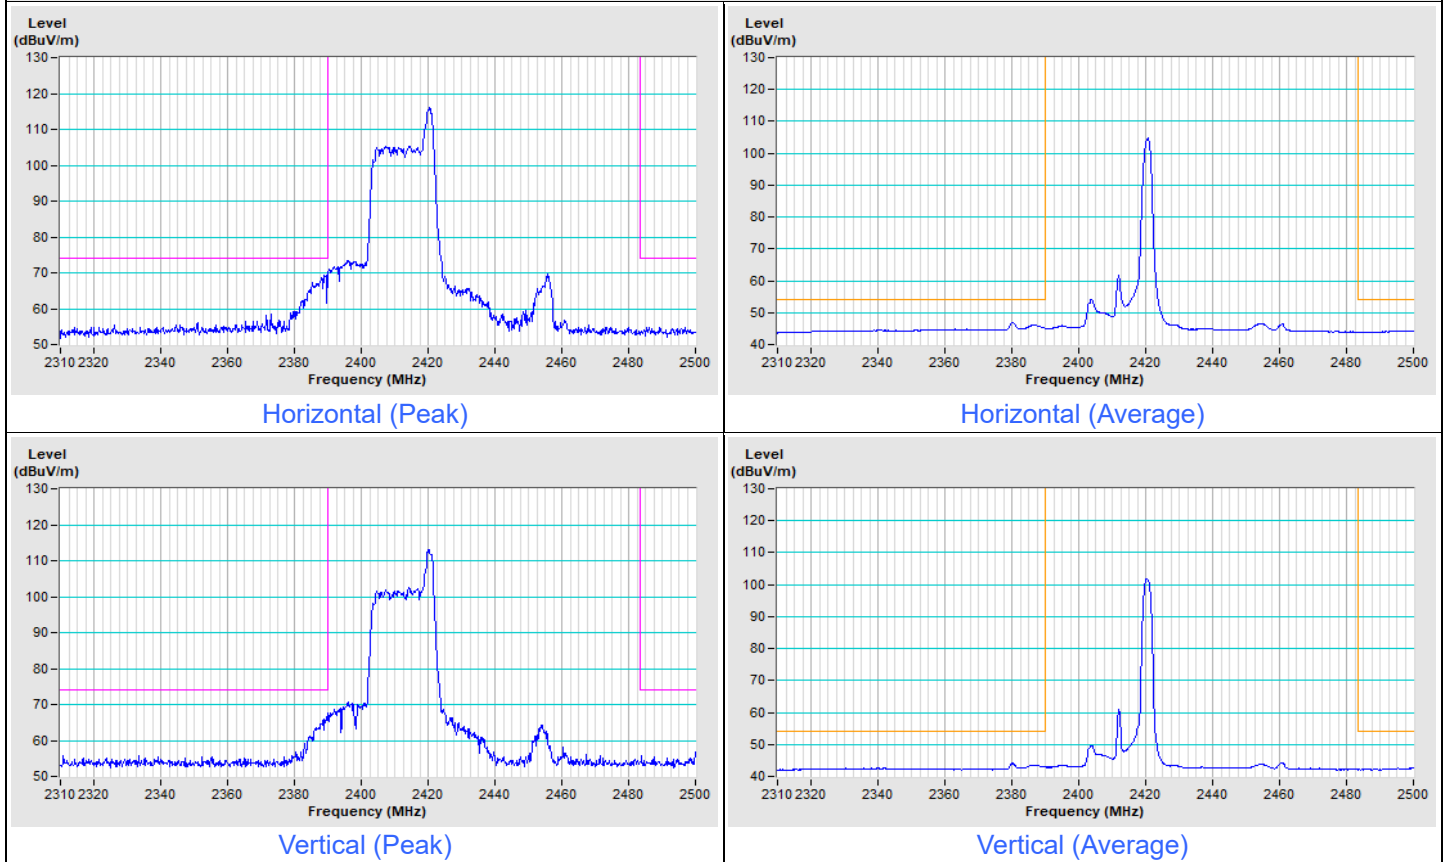


802.11be (EHT20) 26-tone RU Channel 11

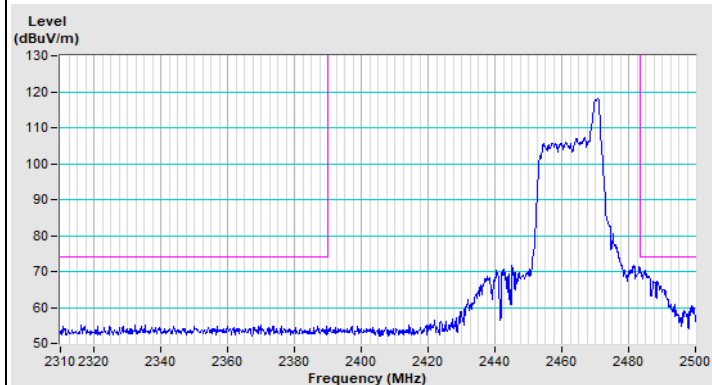


Horizontal (Peak)

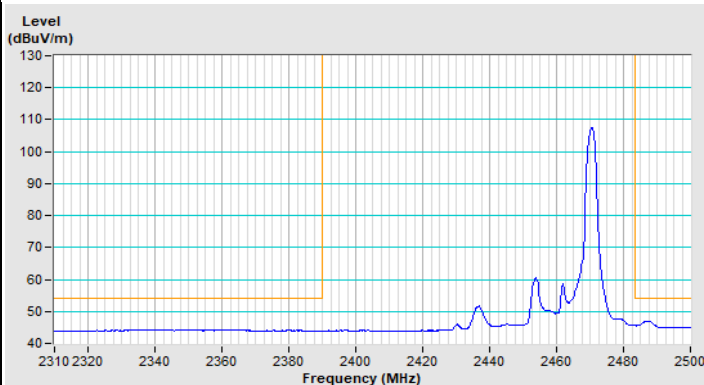

Horizontal (Average)

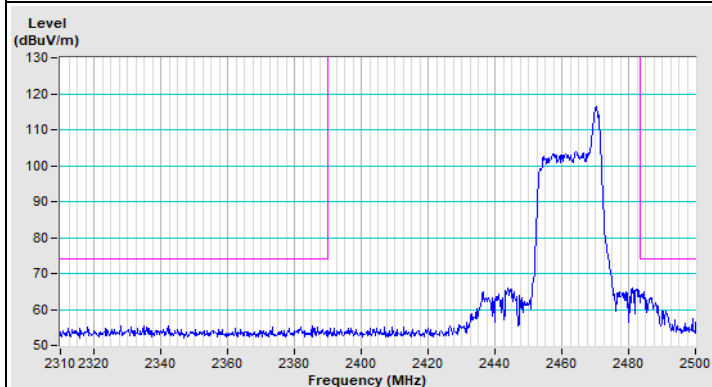


Vertical (Peak)

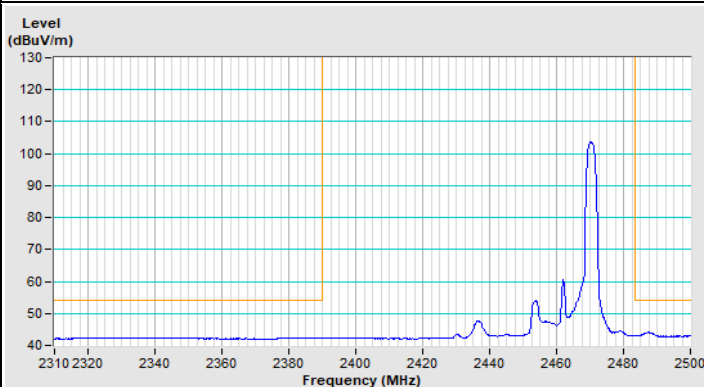


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 12

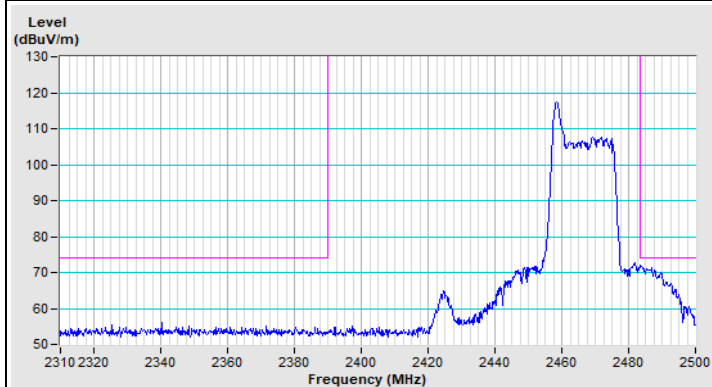


Horizontal (Peak)

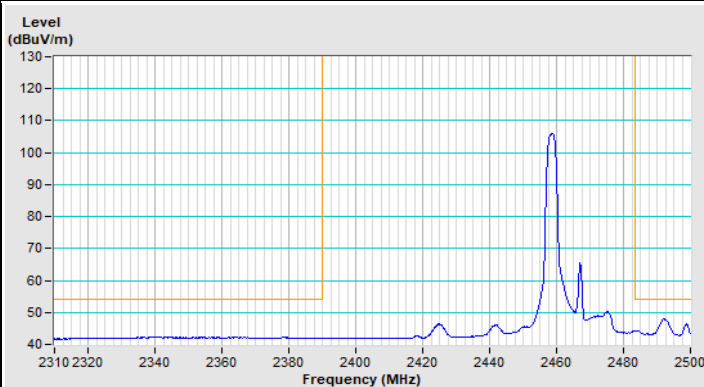

Horizontal (Average)

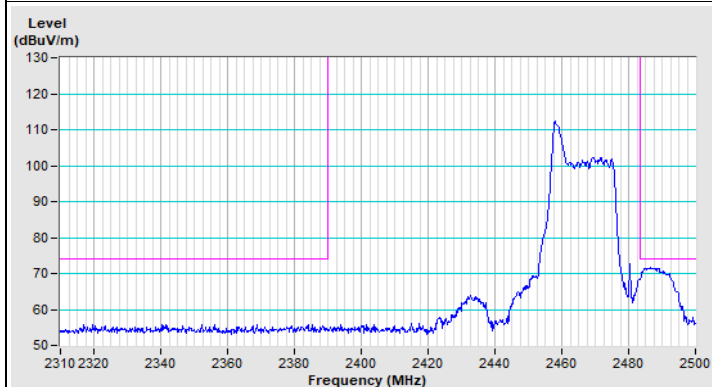


Vertical (Peak)

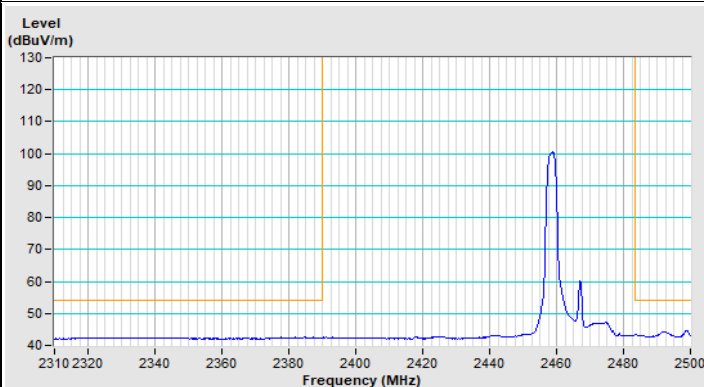


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 13

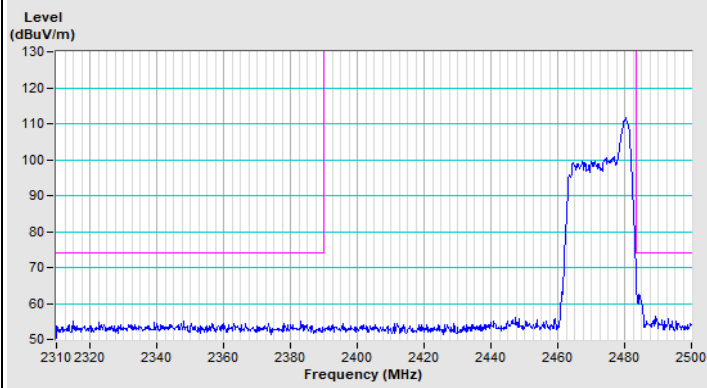


Horizontal (Peak)

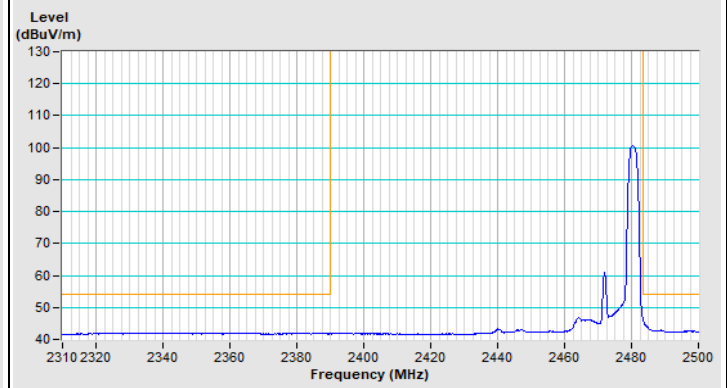

Horizontal (Average)

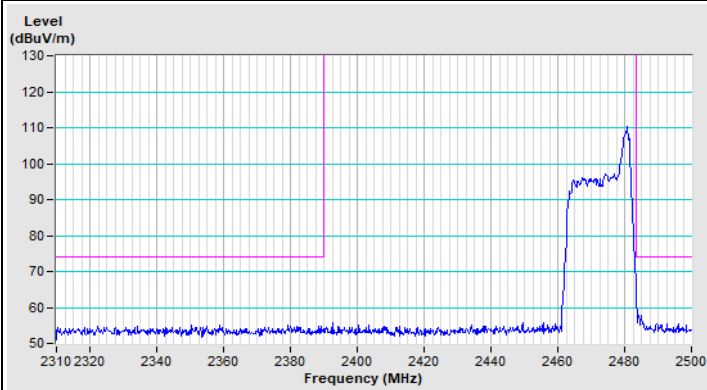


Vertical (Peak)

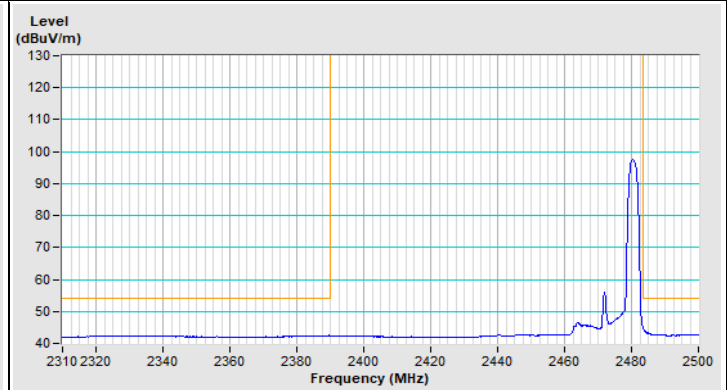


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

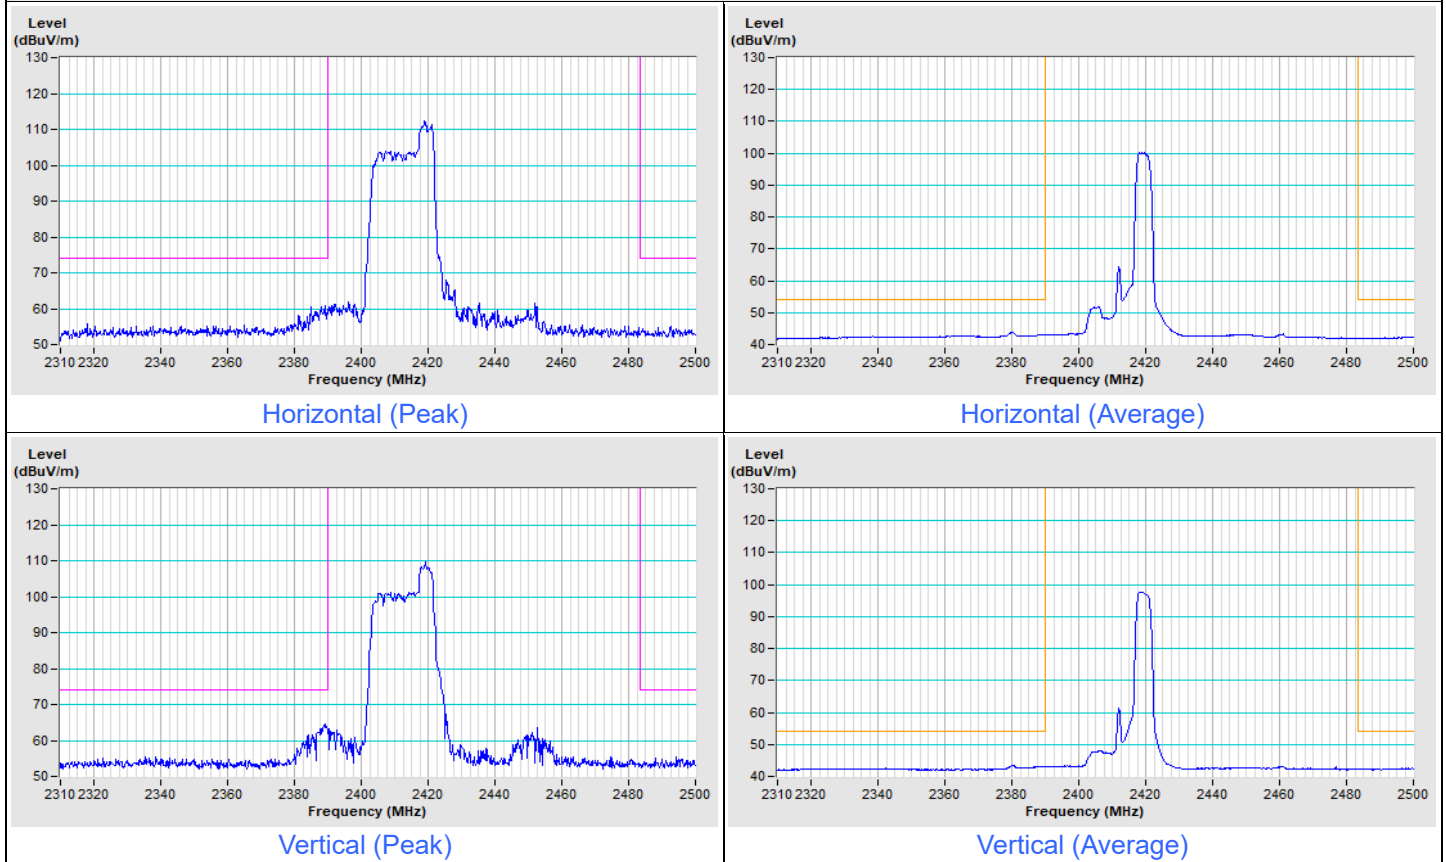


802.11be (EHT20) 52-tone RU Channel 11

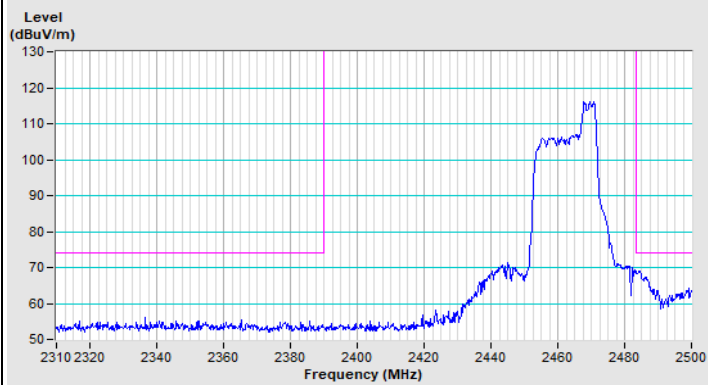


Horizontal (Peak)

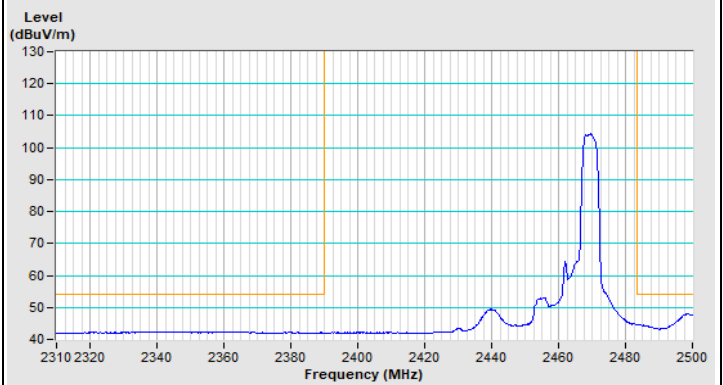

Horizontal (Average)

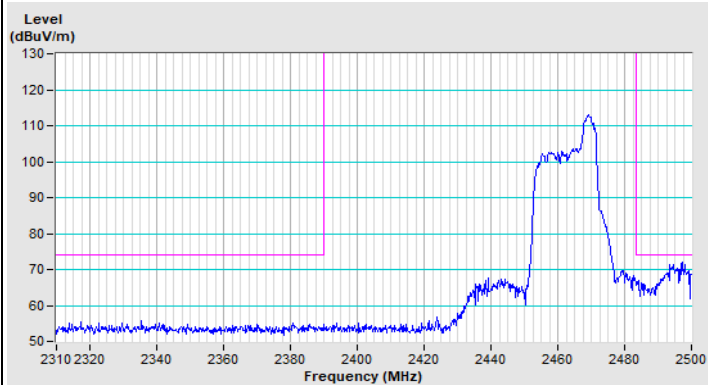


Vertical (Peak)

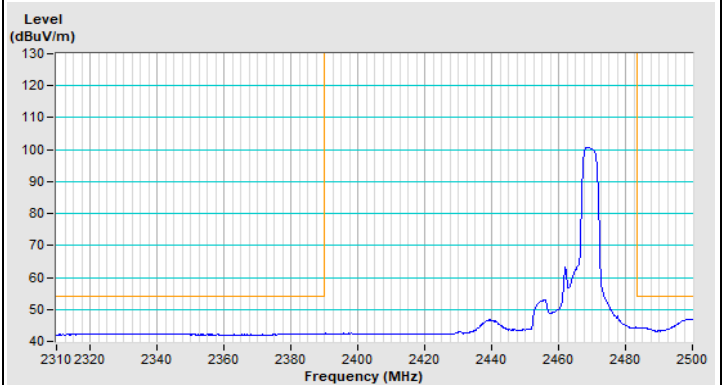


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 12

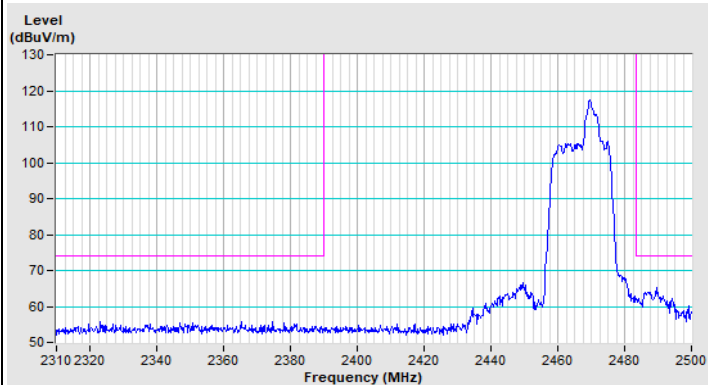


Horizontal (Peak)

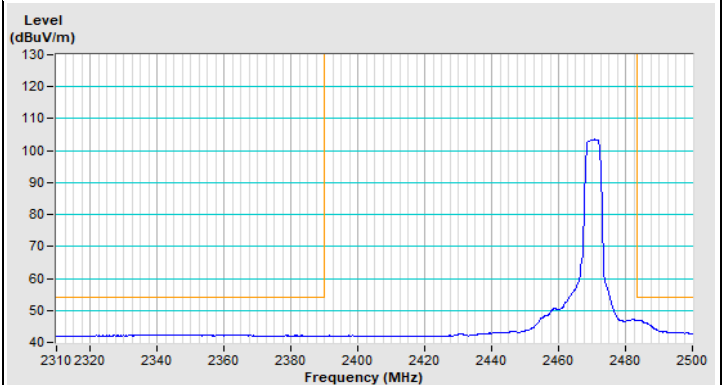

Horizontal (Average)

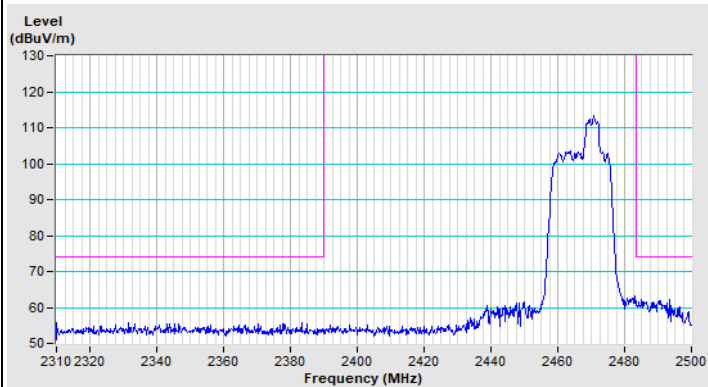


Vertical (Peak)

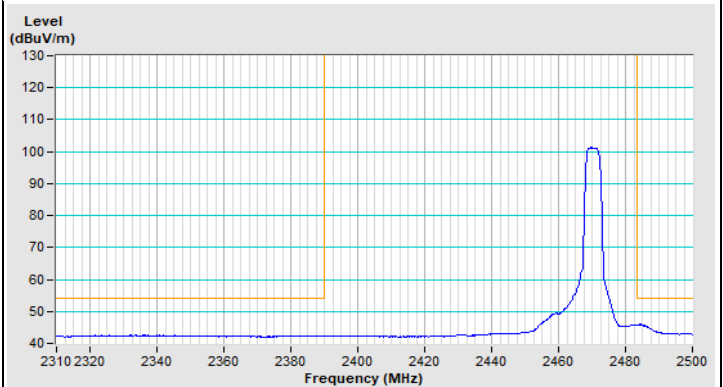


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 13

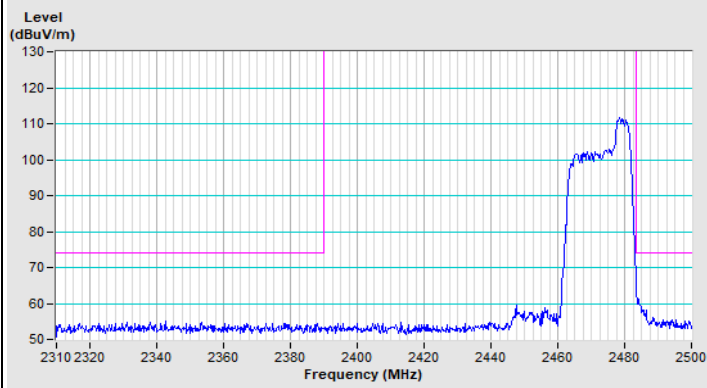


Horizontal (Peak)

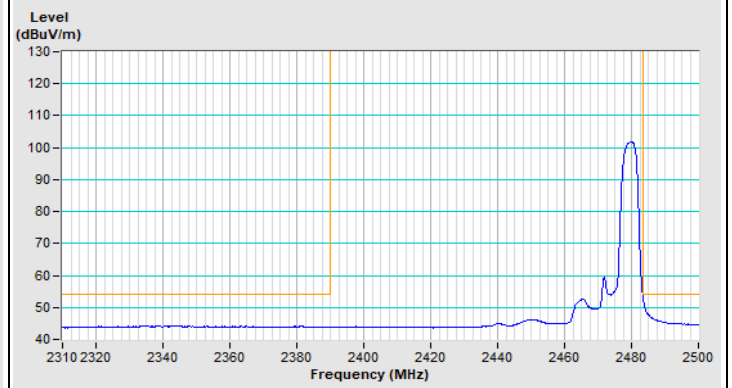

Horizontal (Average)

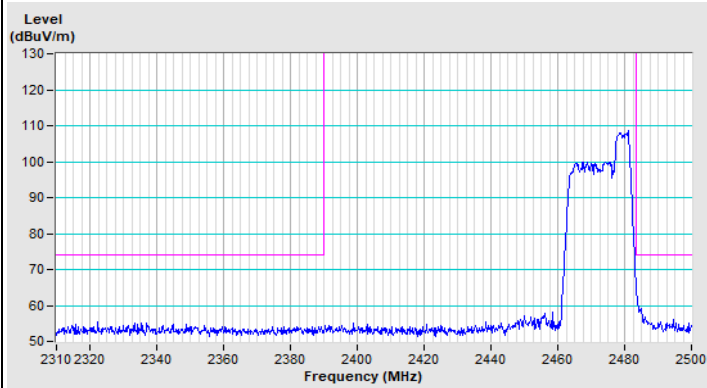


Vertical (Peak)

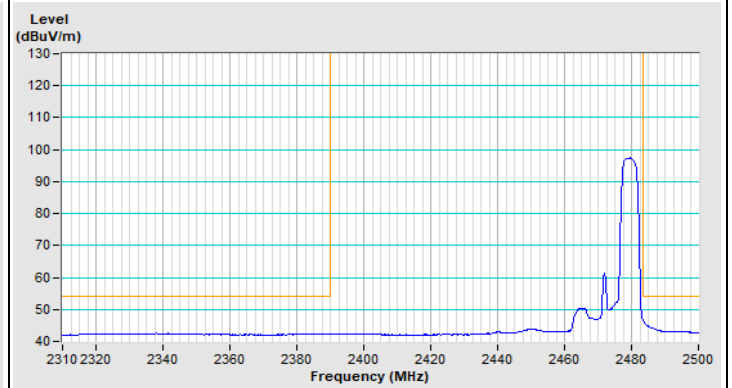


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

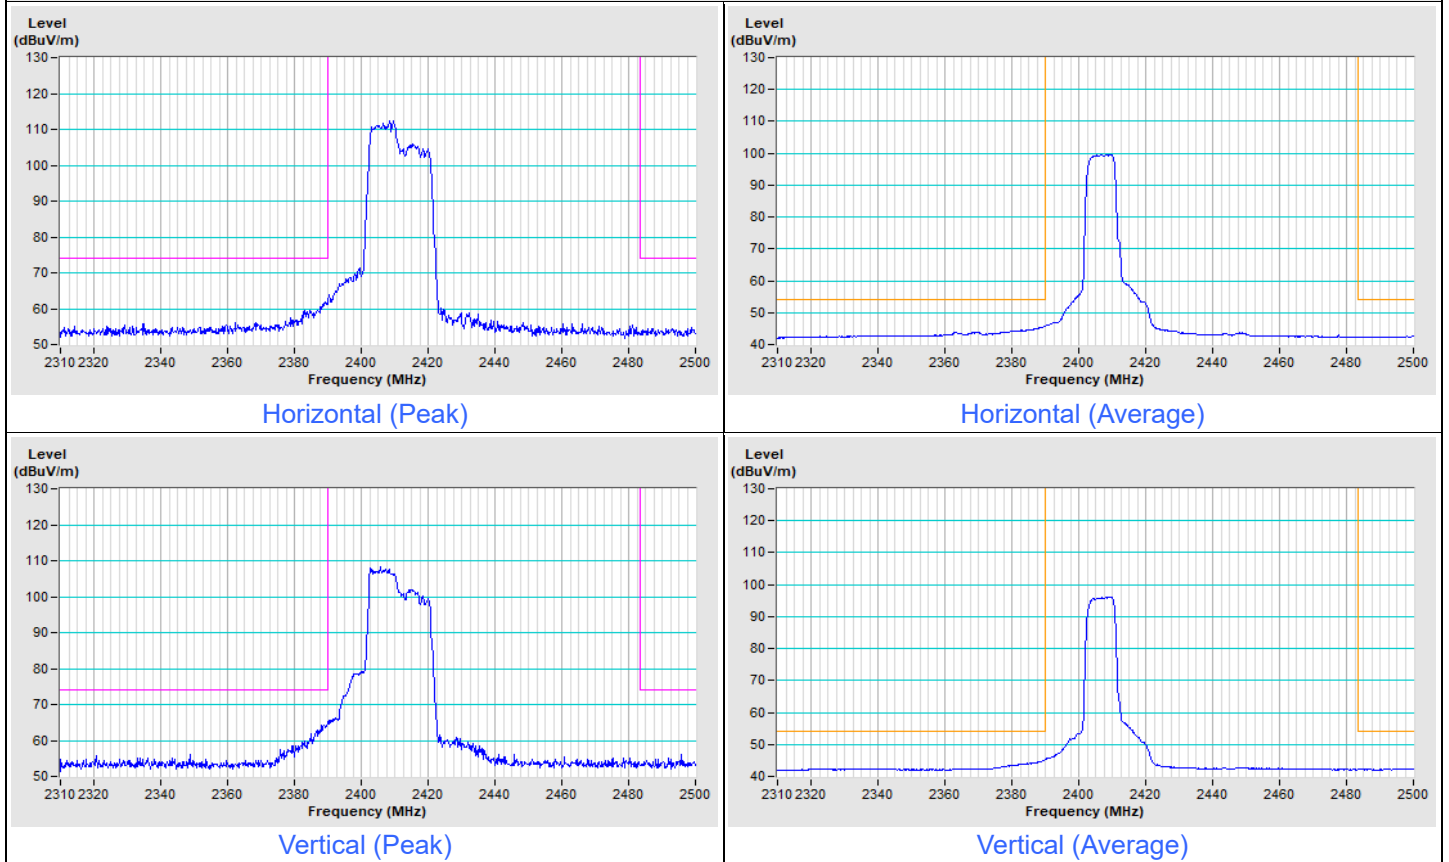


802.11be (EHT20) 106-tone RU Channel 11

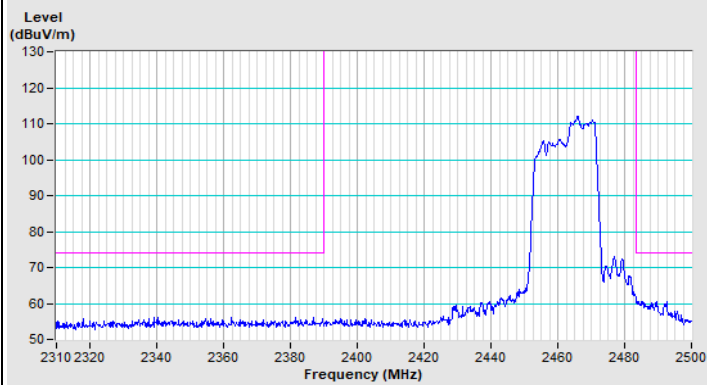


Horizontal (Peak)

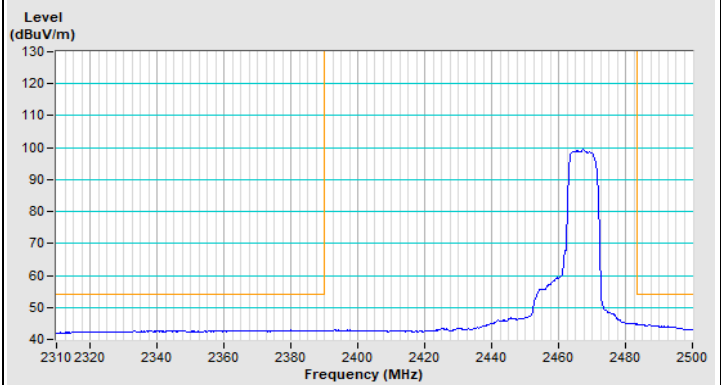

Horizontal (Average)

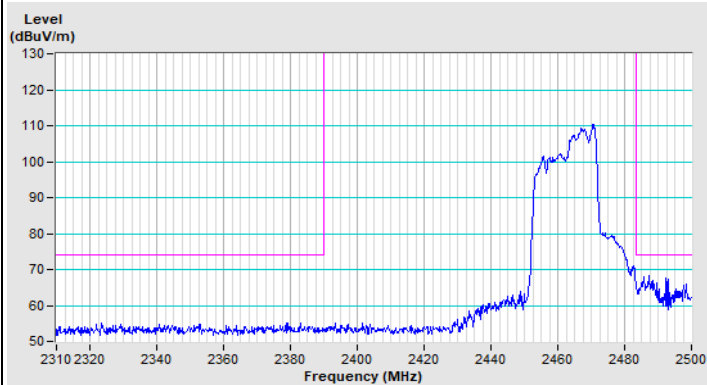


Vertical (Peak)

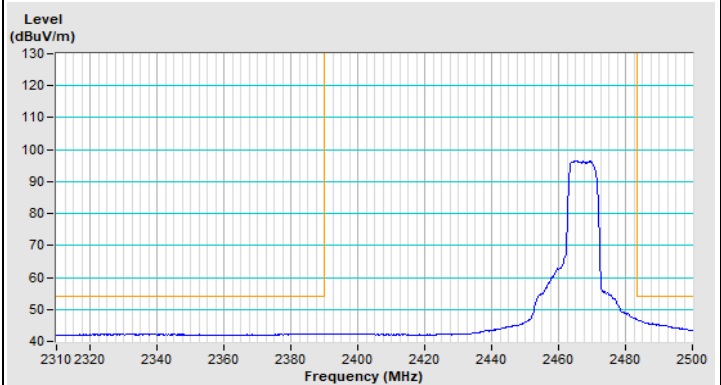


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 12

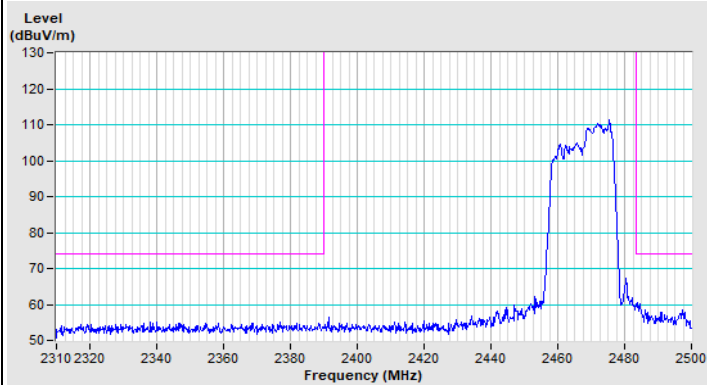


Horizontal (Peak)

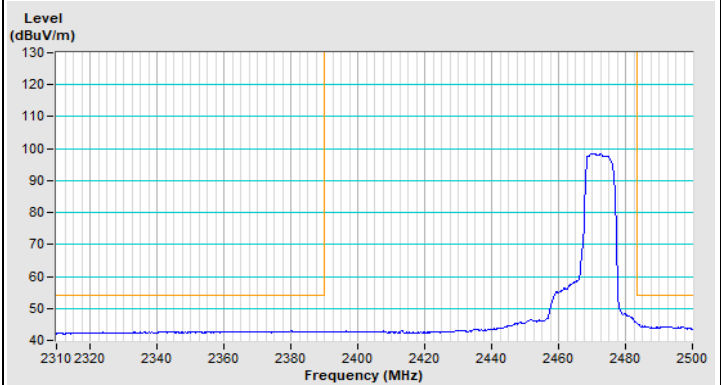

Horizontal (Average)

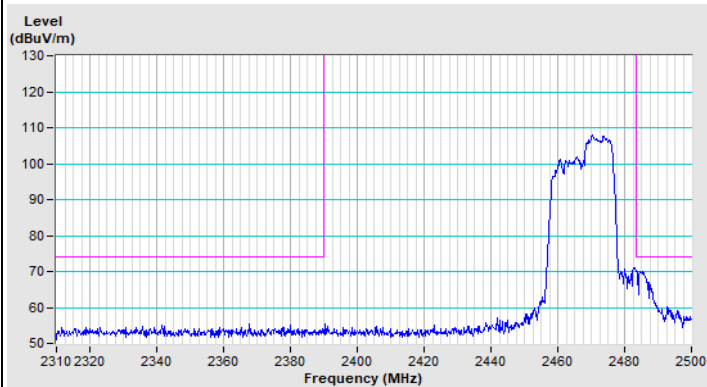


Vertical (Peak)

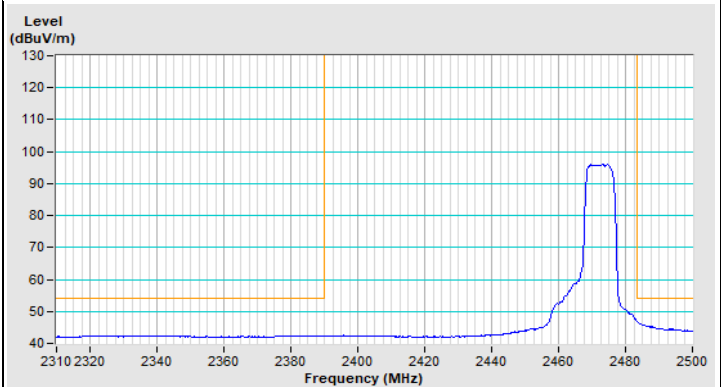


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 13

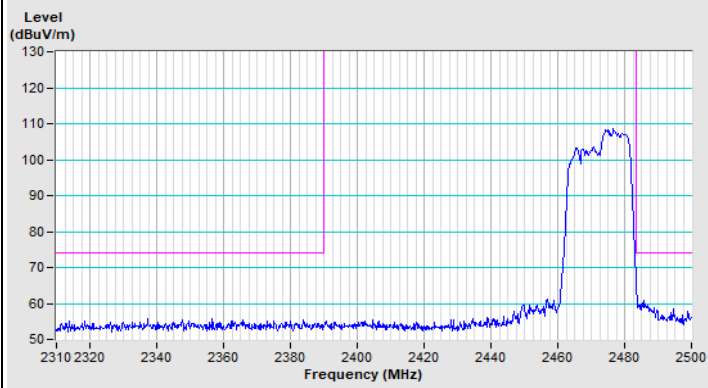


Horizontal (Peak)

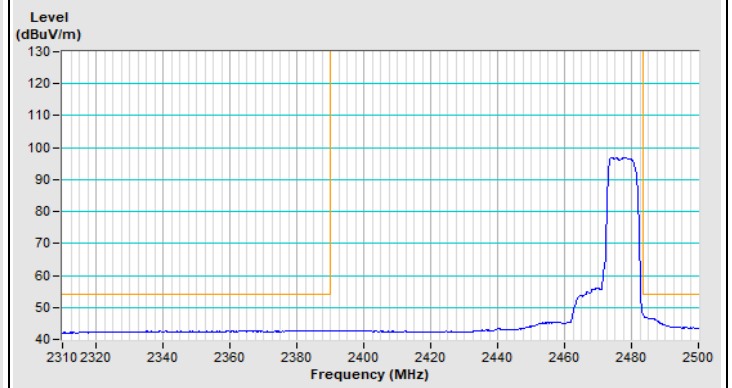

Horizontal (Average)

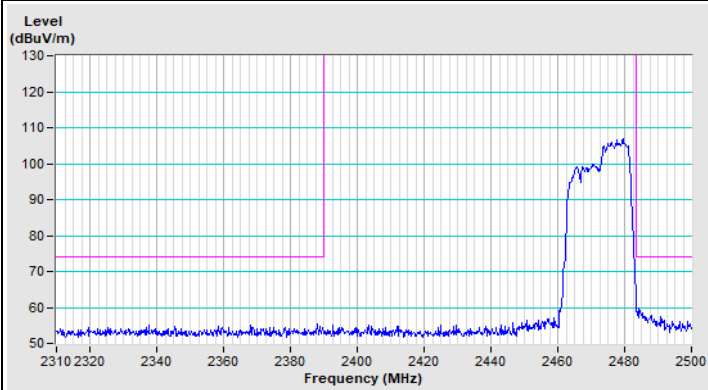

Vertical (Peak)

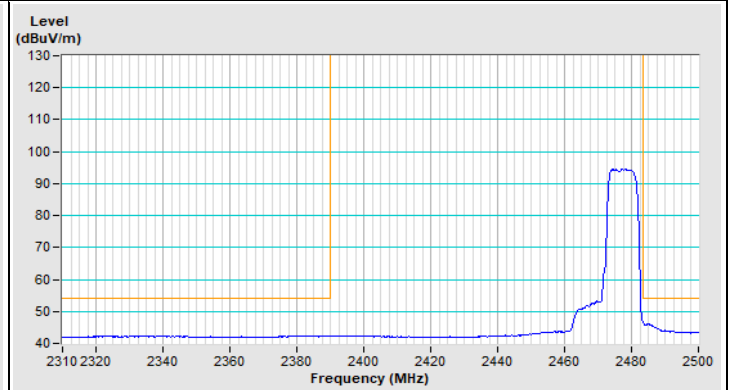


Vertical (Average)


2Tx

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11b Channel 1

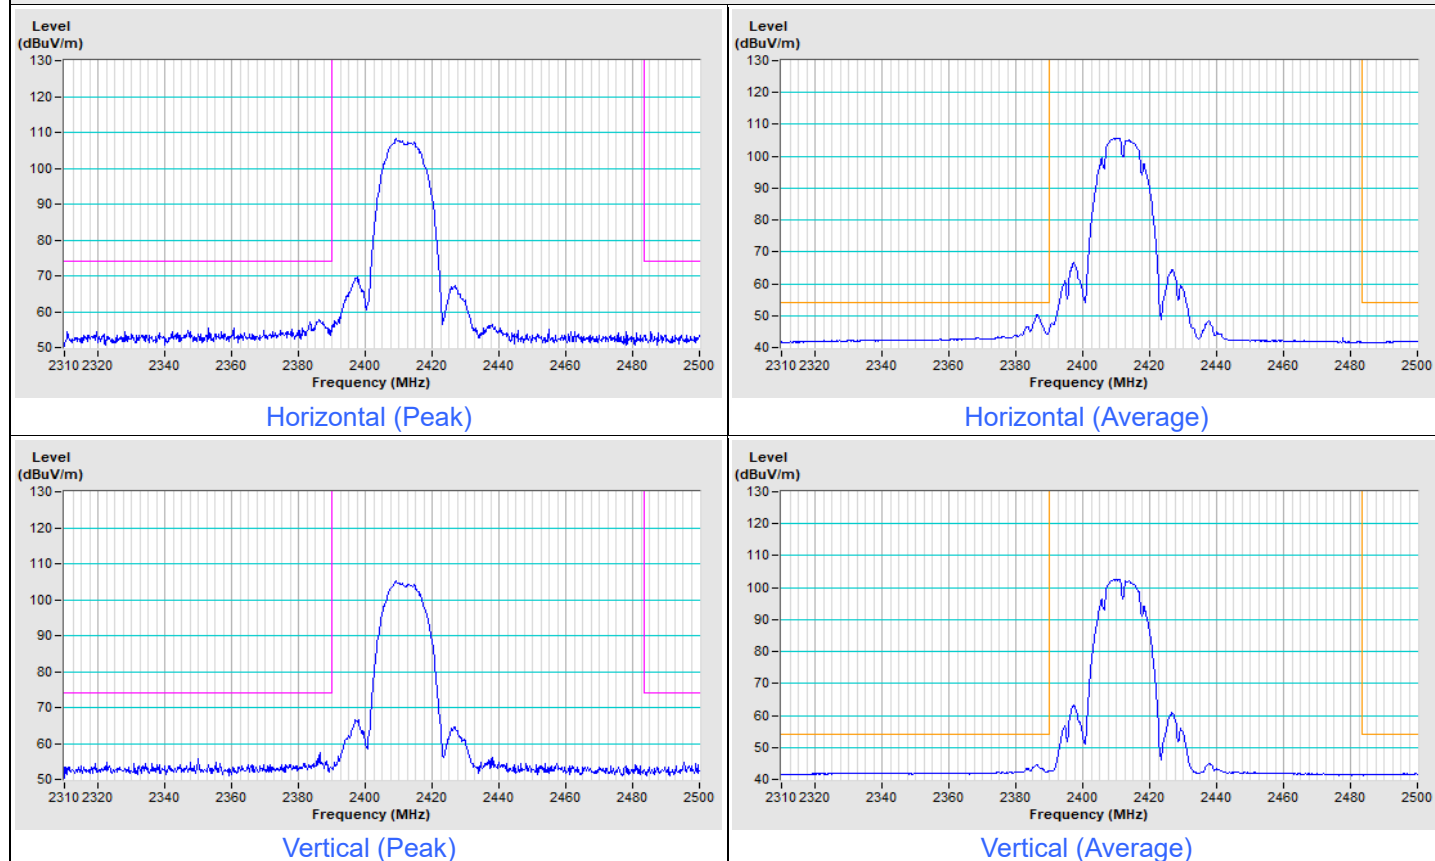


802.11b Channel 11

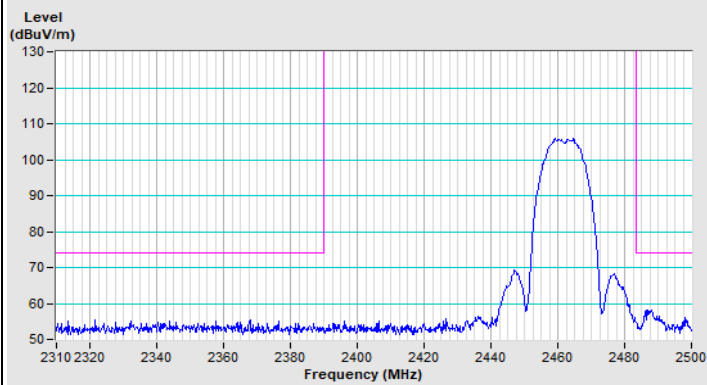


Horizontal (Peak)

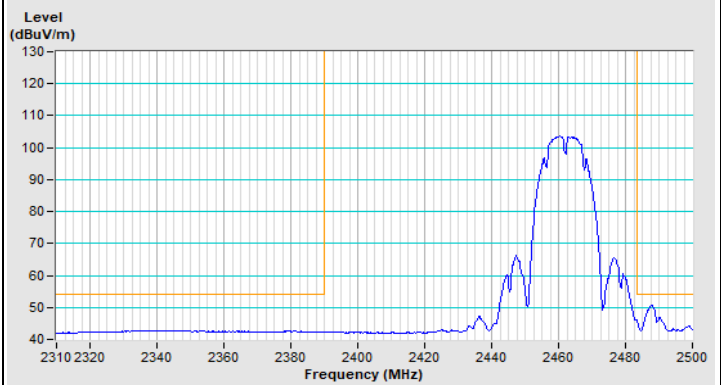

Horizontal (Average)

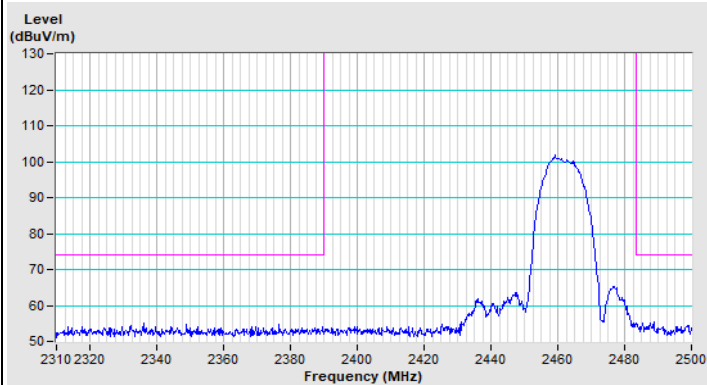


Vertical (Peak)

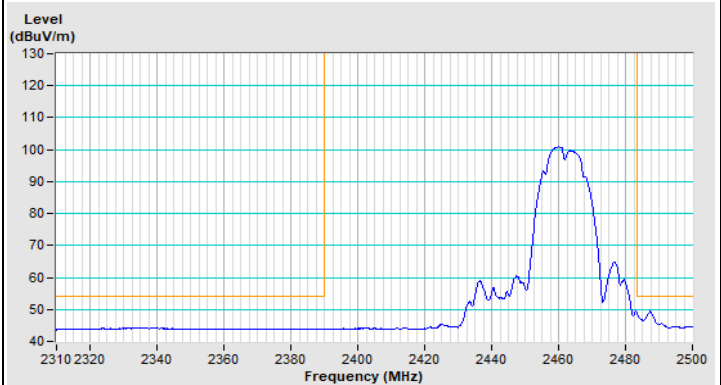


Vertical (Average)


802.11b Channel 12

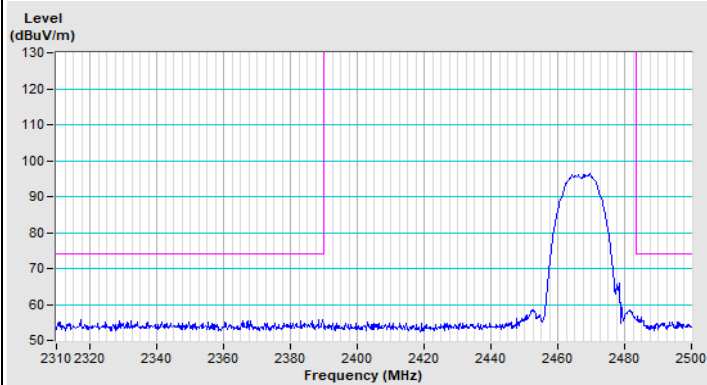


Horizontal (Peak)

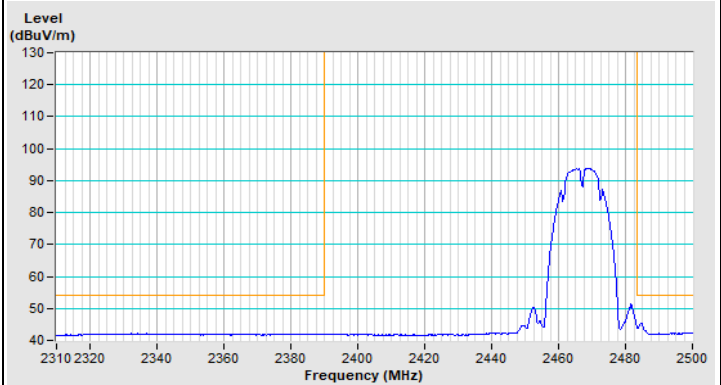

Horizontal (Average)

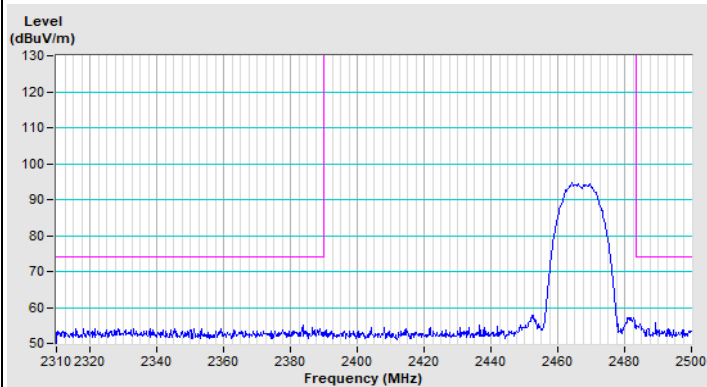


Vertical (Peak)

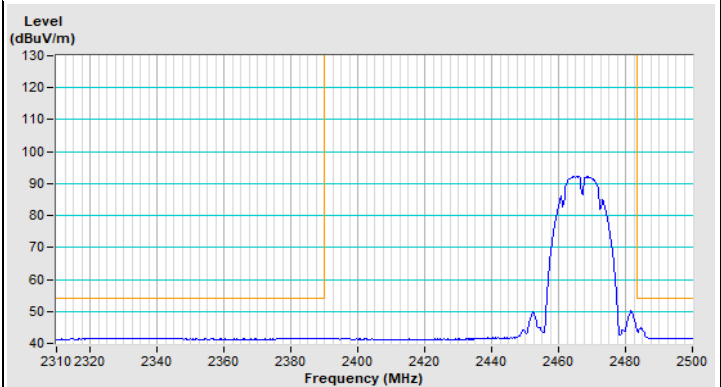


Vertical (Average)


802.11b Channel 13

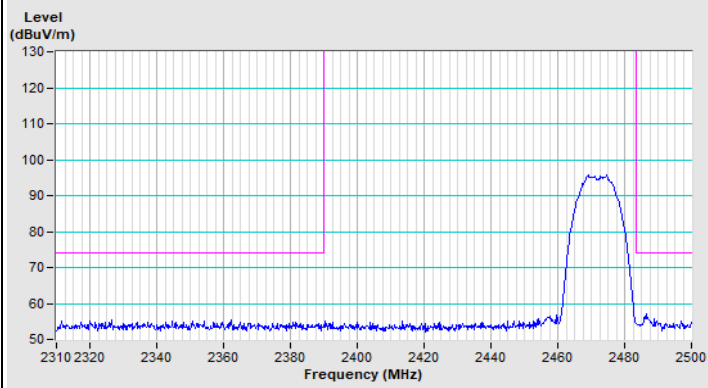


Horizontal (Peak)

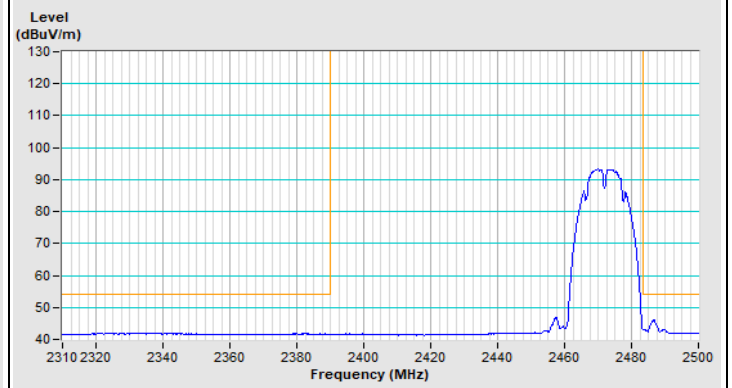

Horizontal (Average)

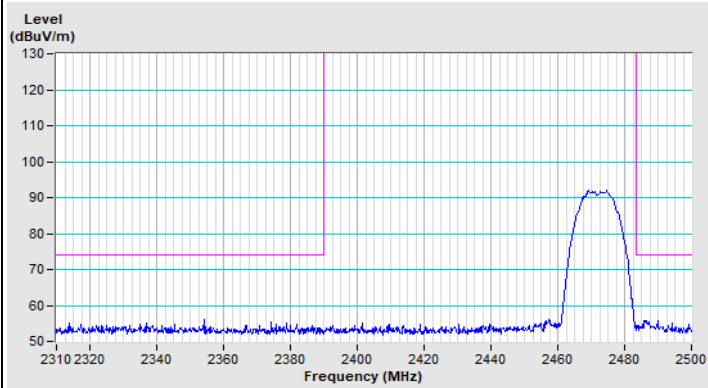


Vertical (Peak)

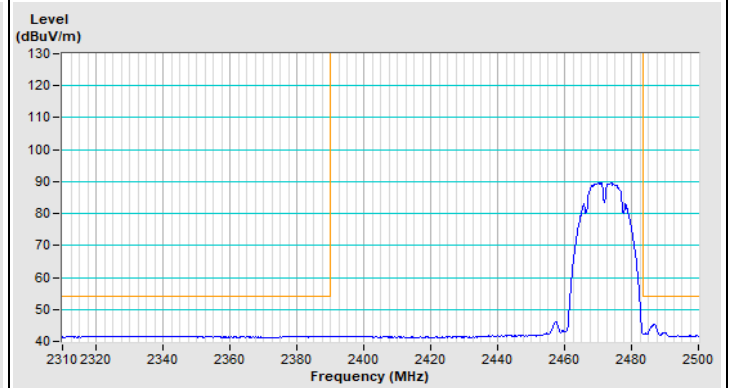


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11g Channel 1

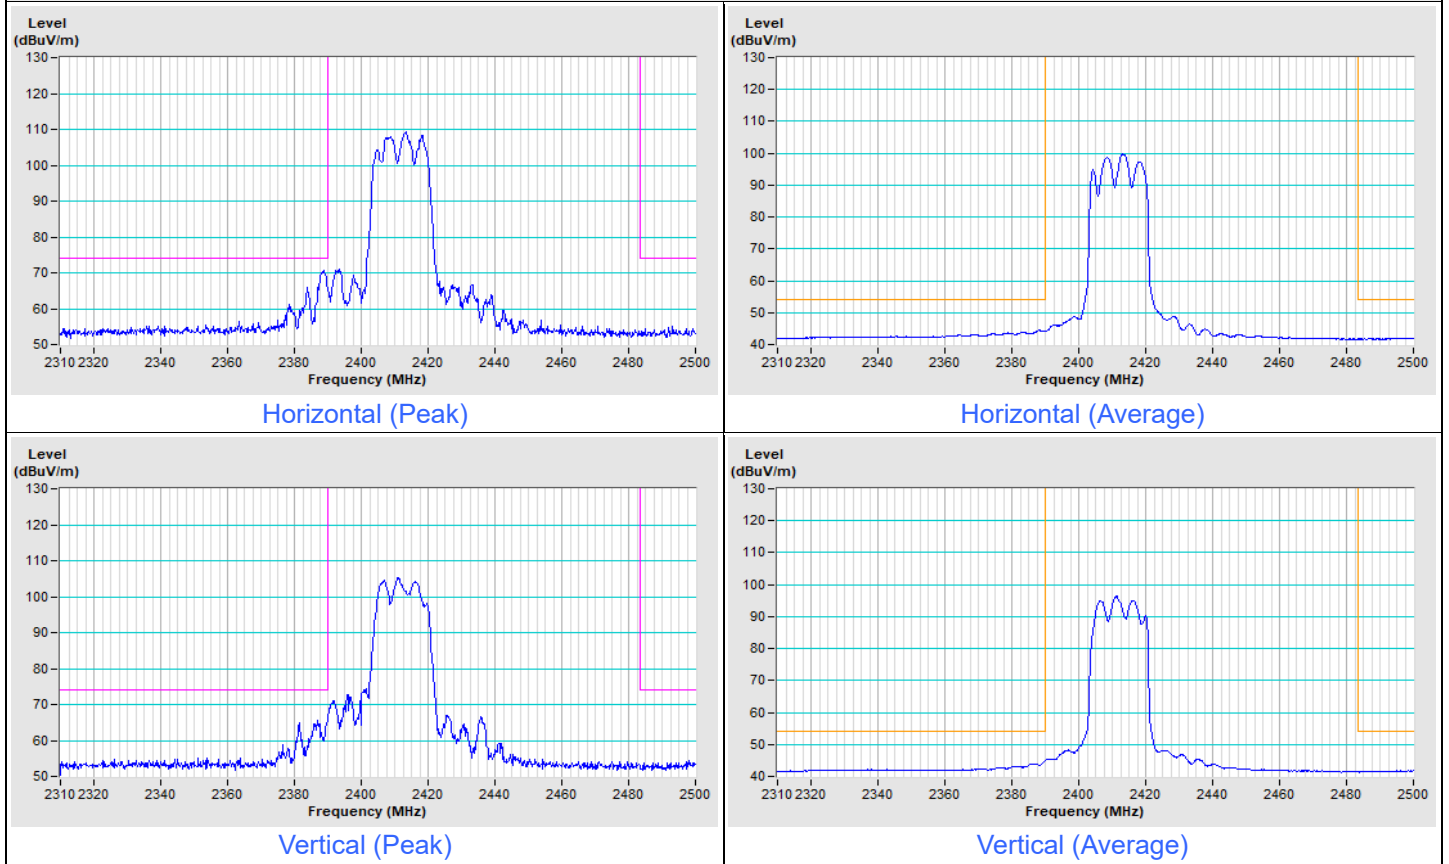


802.11g Channel 11

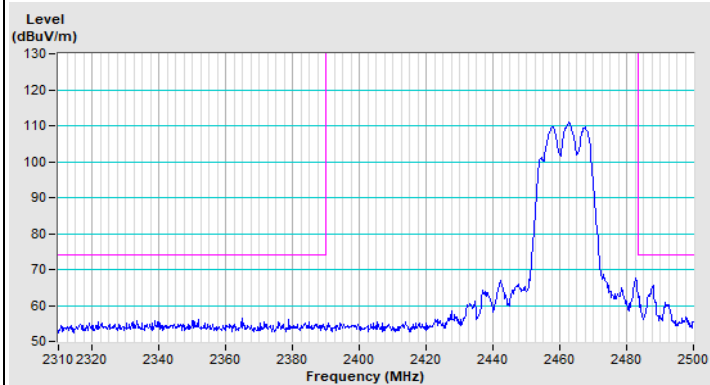


Horizontal (Peak)

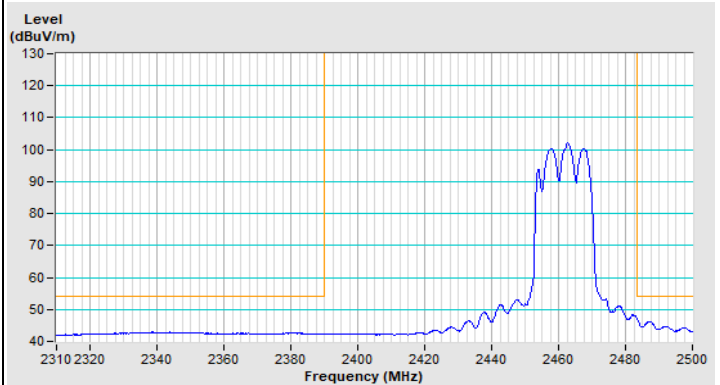

Horizontal (Average)

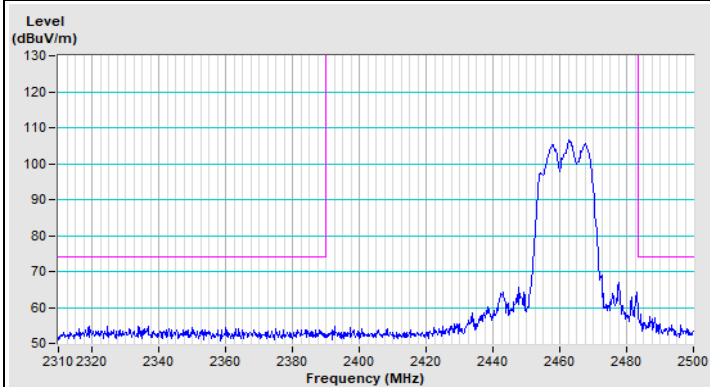


Vertical (Peak)

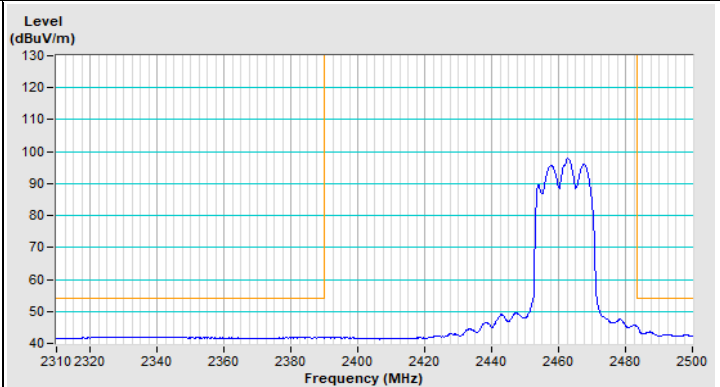


Vertical (Average)


802.11g Channel 12

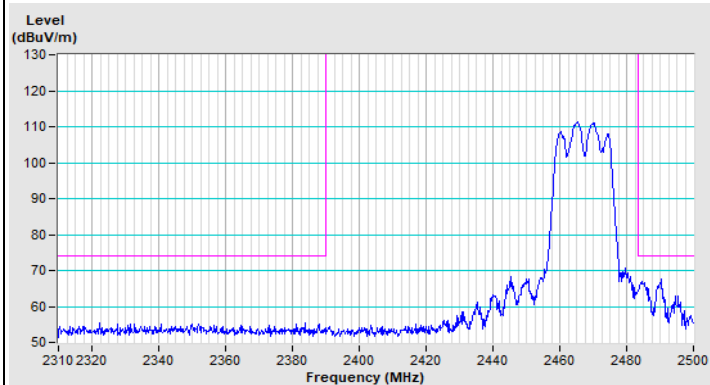


Horizontal (Peak)

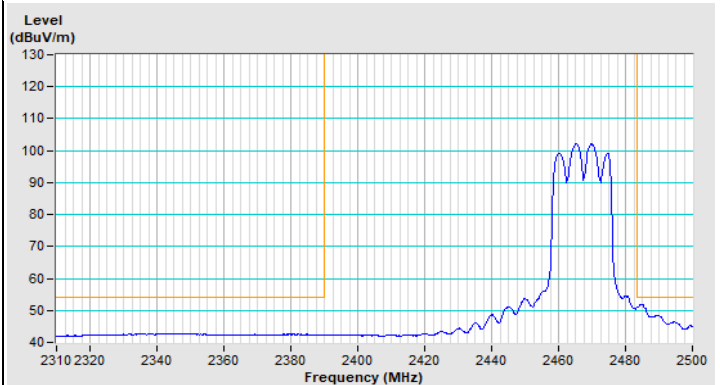


Horizontal (Average)

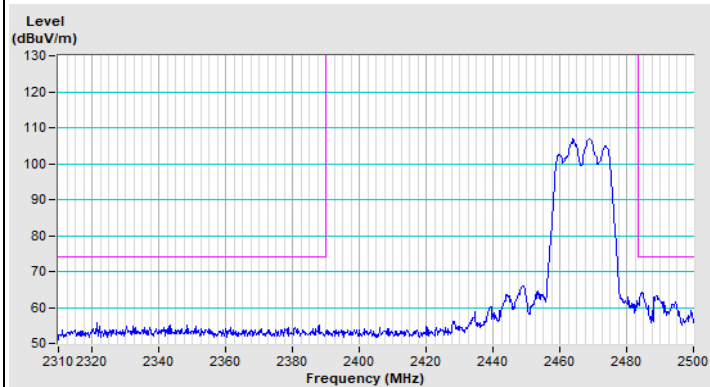


Vertical (Peak)

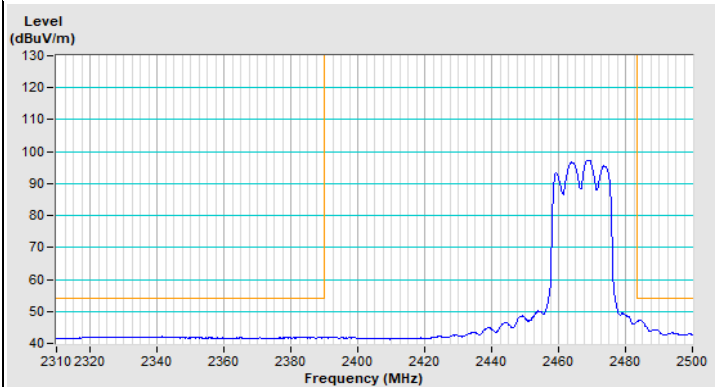


Vertical (Average)

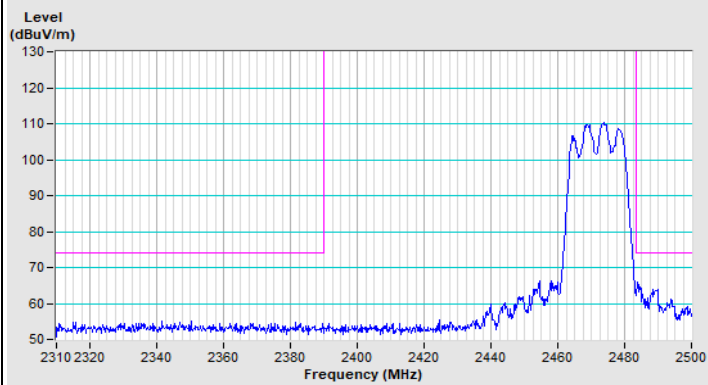802.11g Channel 13


Horizontal (Peak)

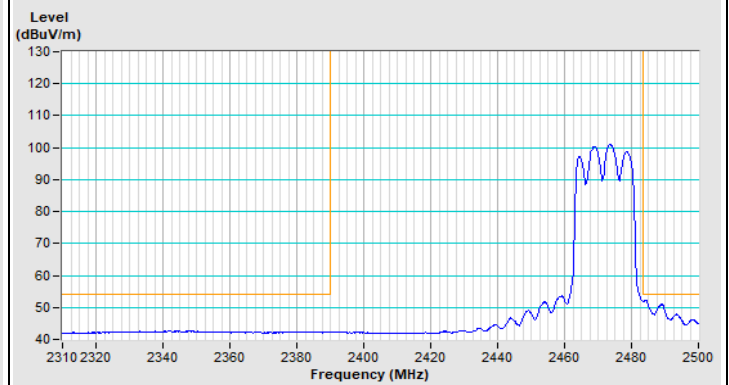

Horizontal (Average)

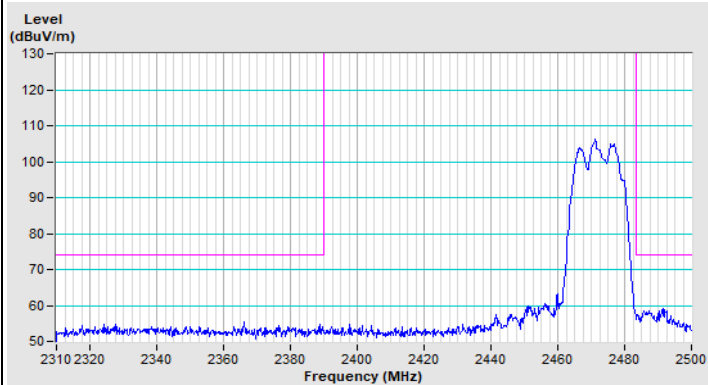


Vertical (Peak)

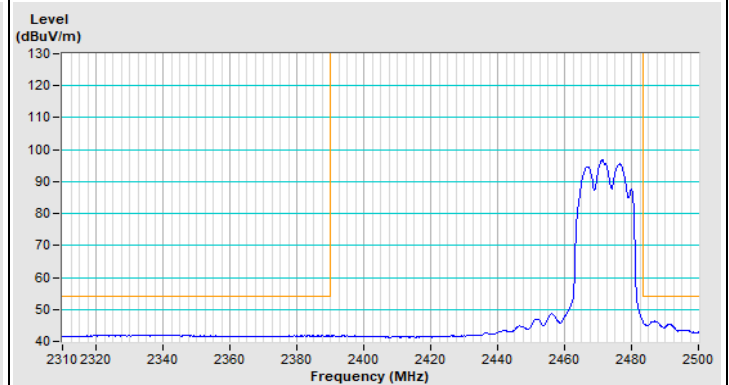


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 1

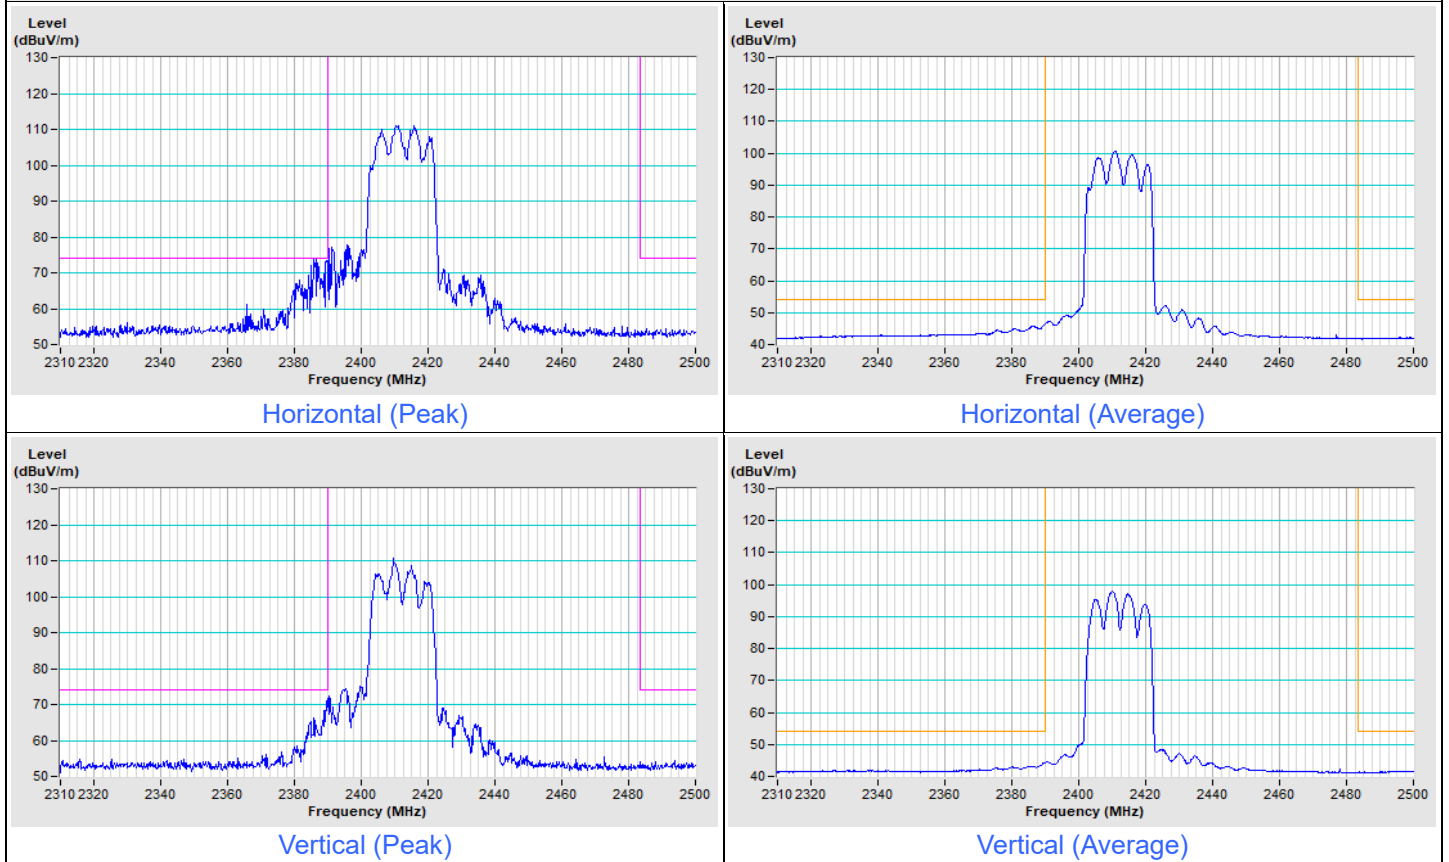


802.11be (EHT20) Channel 11

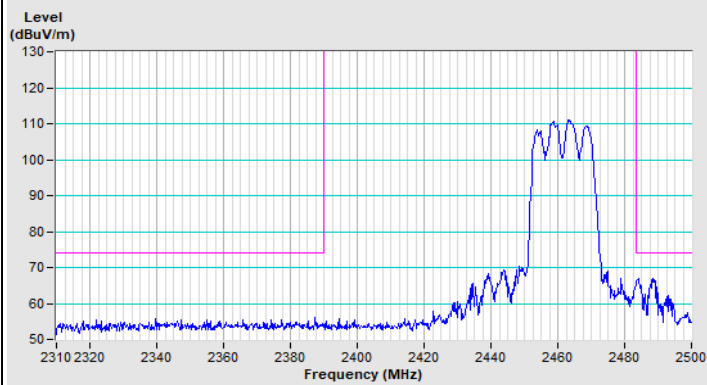


Horizontal (Peak)

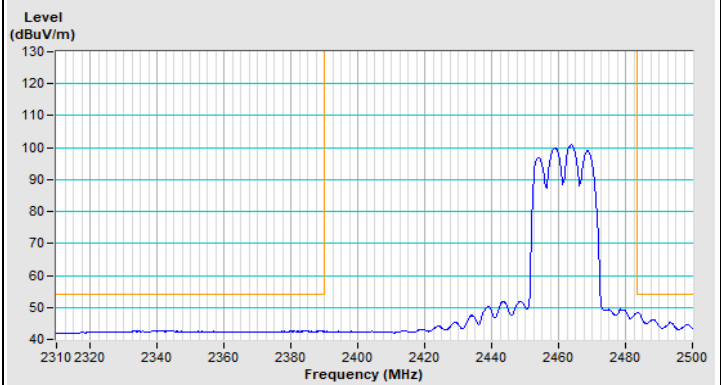

Horizontal (Average)

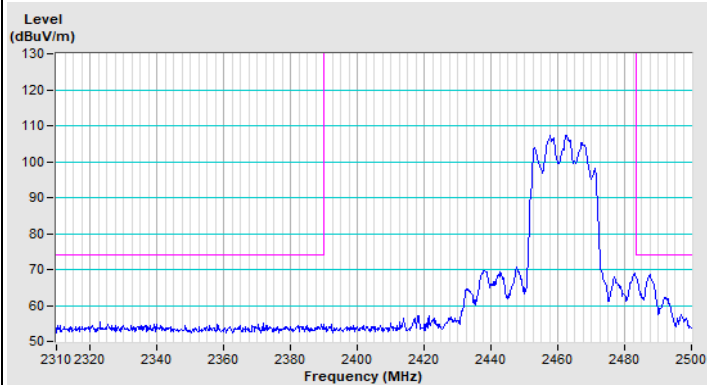


Vertical (Peak)

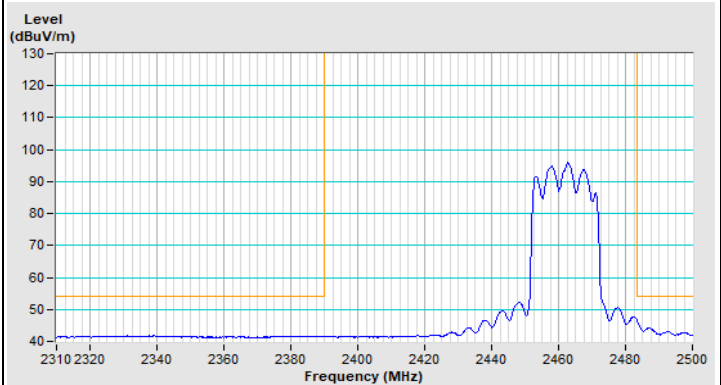


Vertical (Average)


802.11be (EHT20) Channel 12

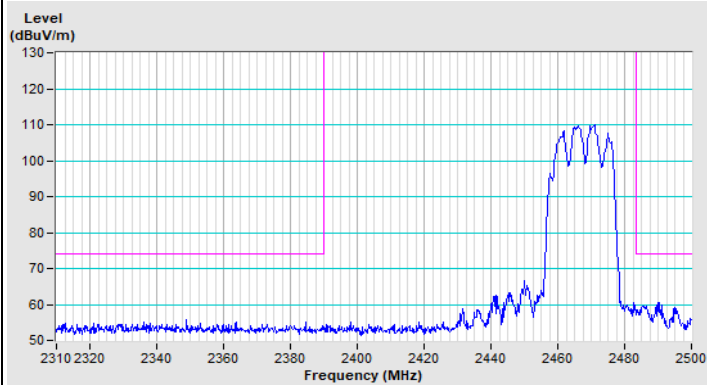


Horizontal (Peak)

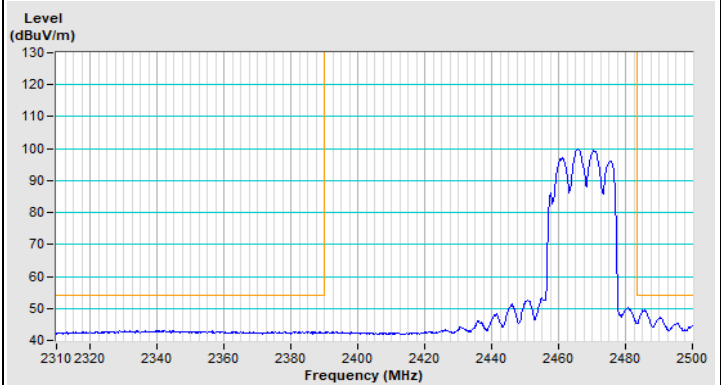

Horizontal (Average)

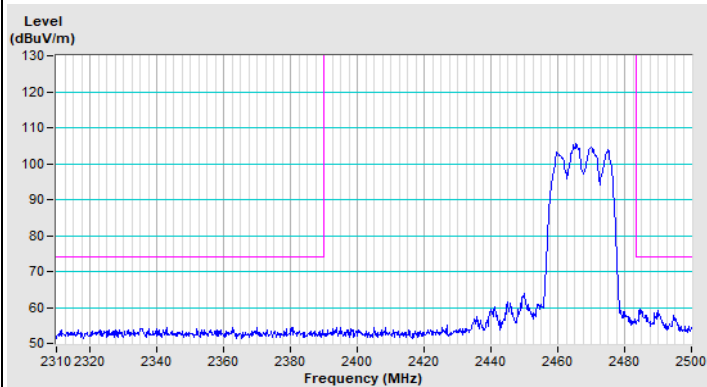


Vertical (Peak)

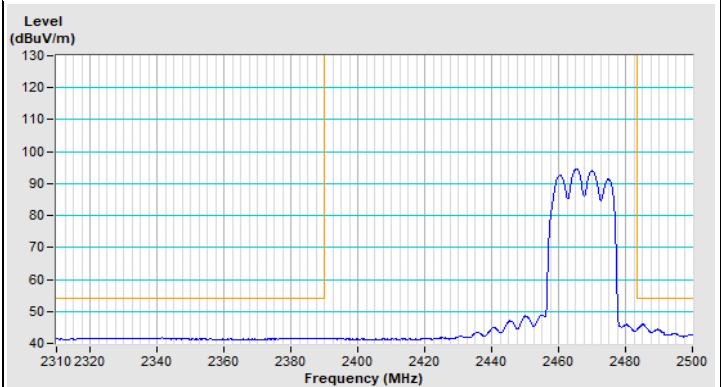


Vertical (Average)


802.11be (EHT20) Channel 13

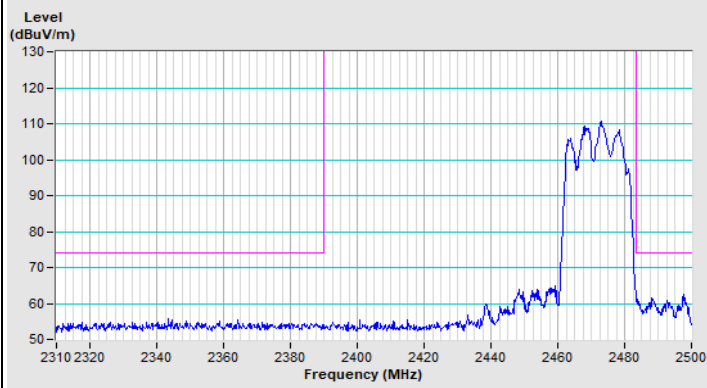


Horizontal (Peak)

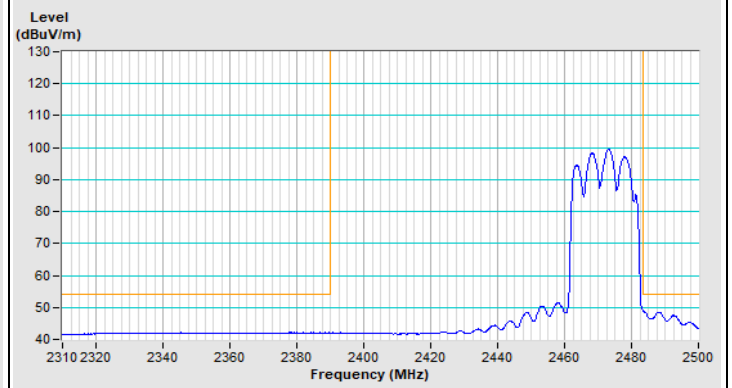

Horizontal (Average)

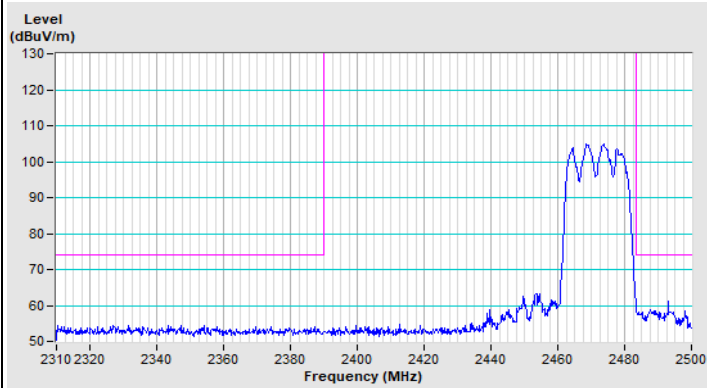


Vertical (Peak)

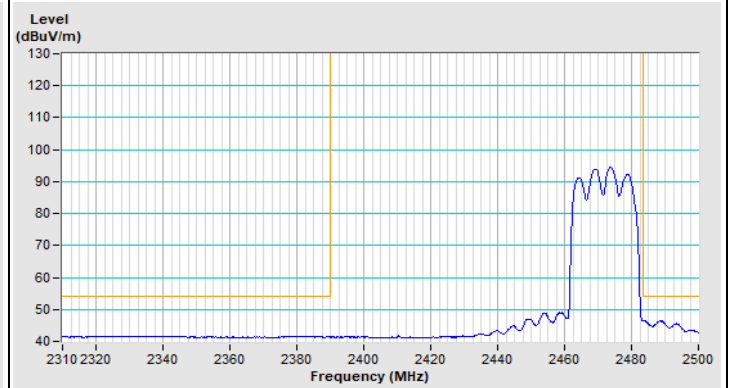


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 3

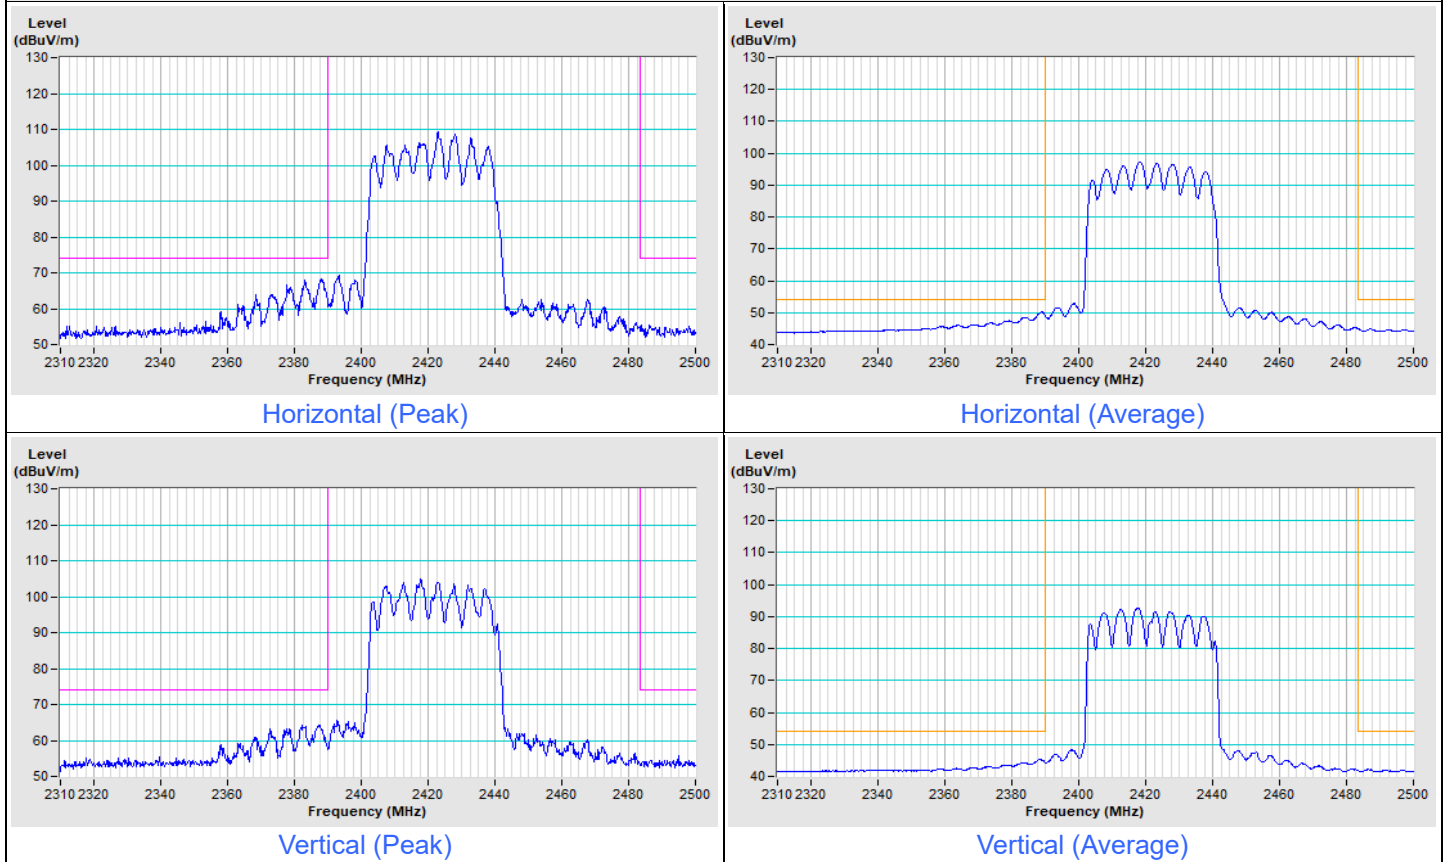


802.11be (EHT40) Channel 9

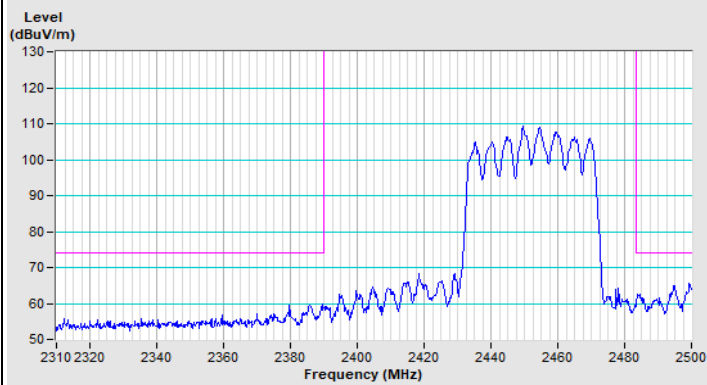


Horizontal (Peak)

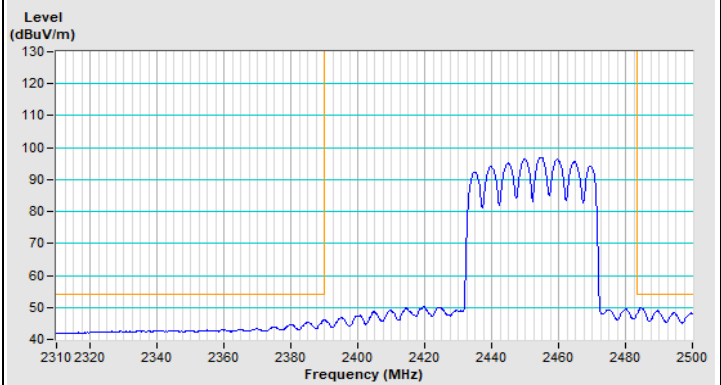

Horizontal (Average)

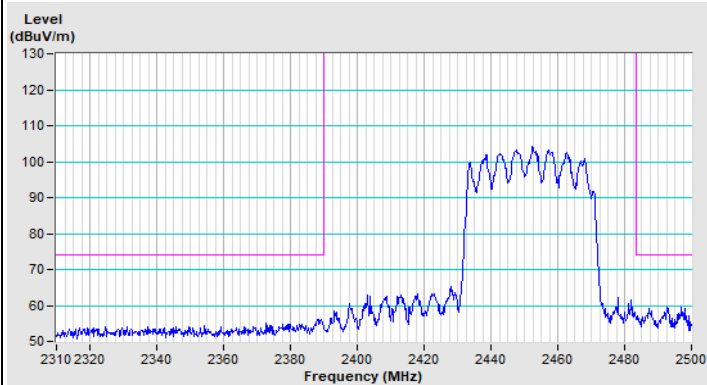


Vertical (Peak)

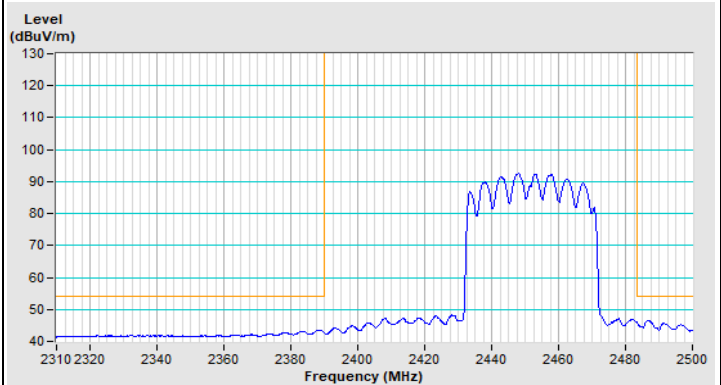


Vertical (Average)


802.11be (EHT40) Channel 10

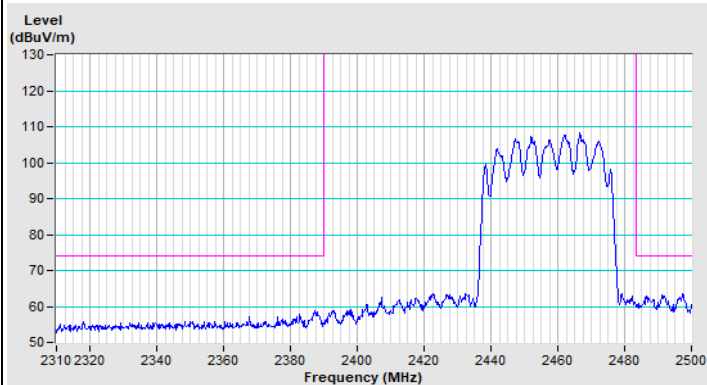


Horizontal (Peak)

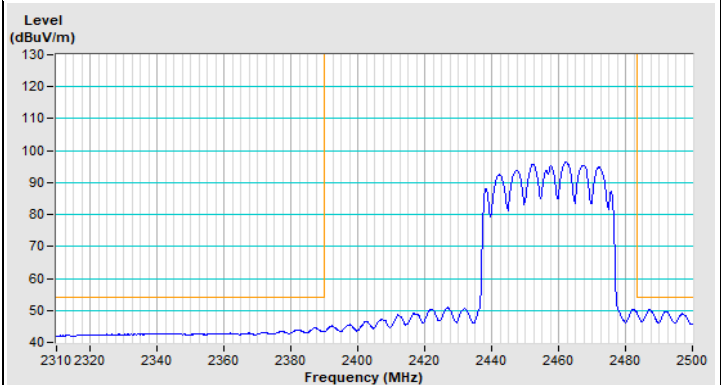

Horizontal (Average)

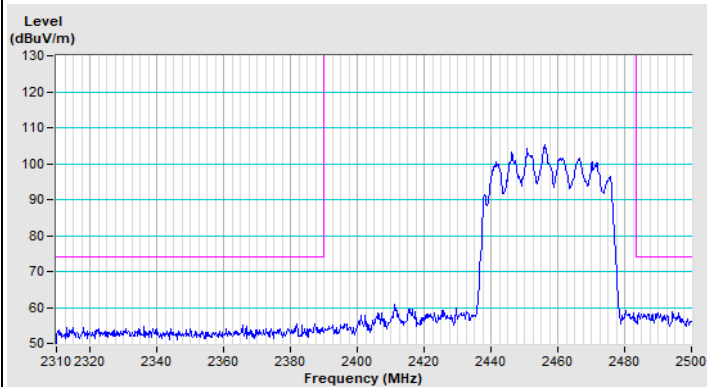


Vertical (Peak)

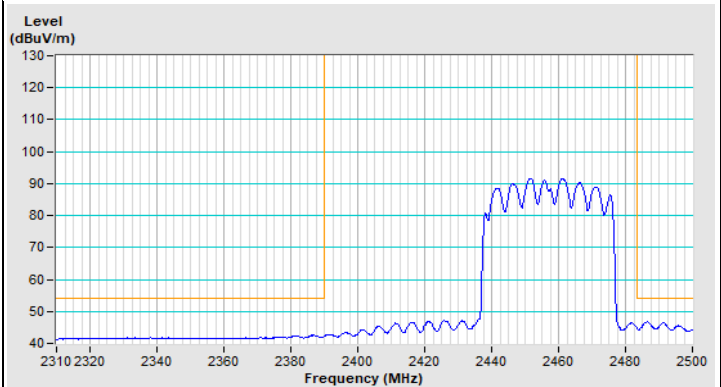


Vertical (Average)


802.11be (EHT40) Channel 11

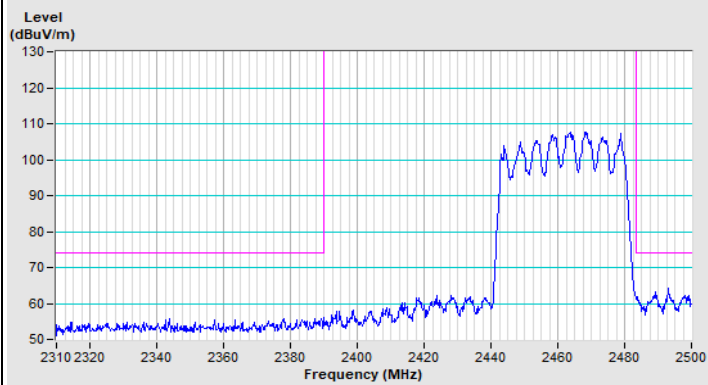


Horizontal (Peak)

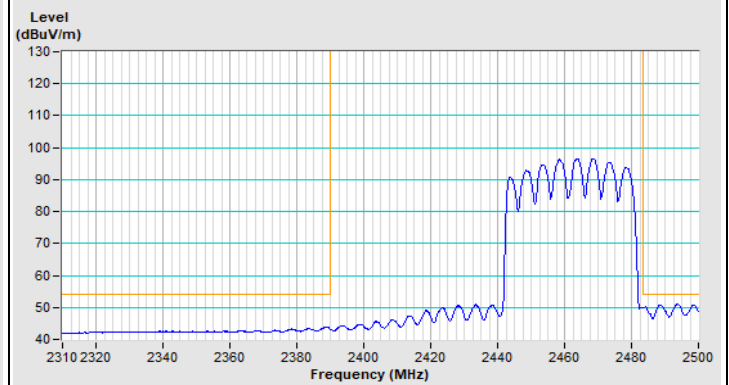

Horizontal (Average)

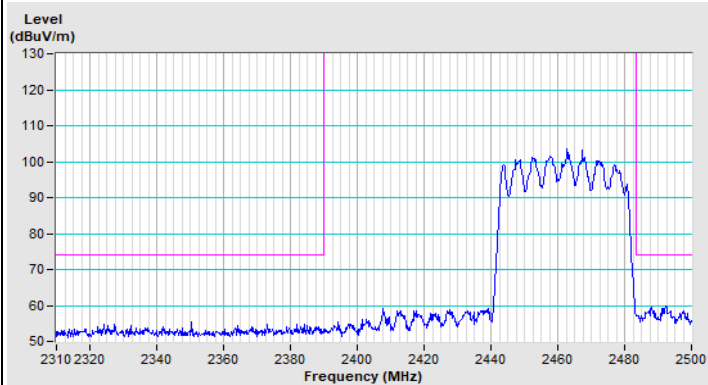


Vertical (Peak)

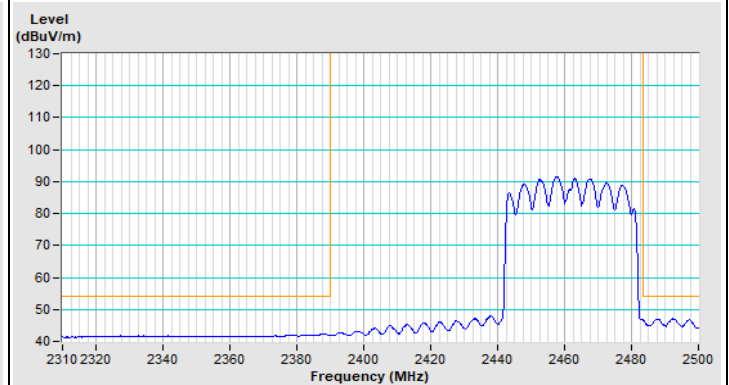


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

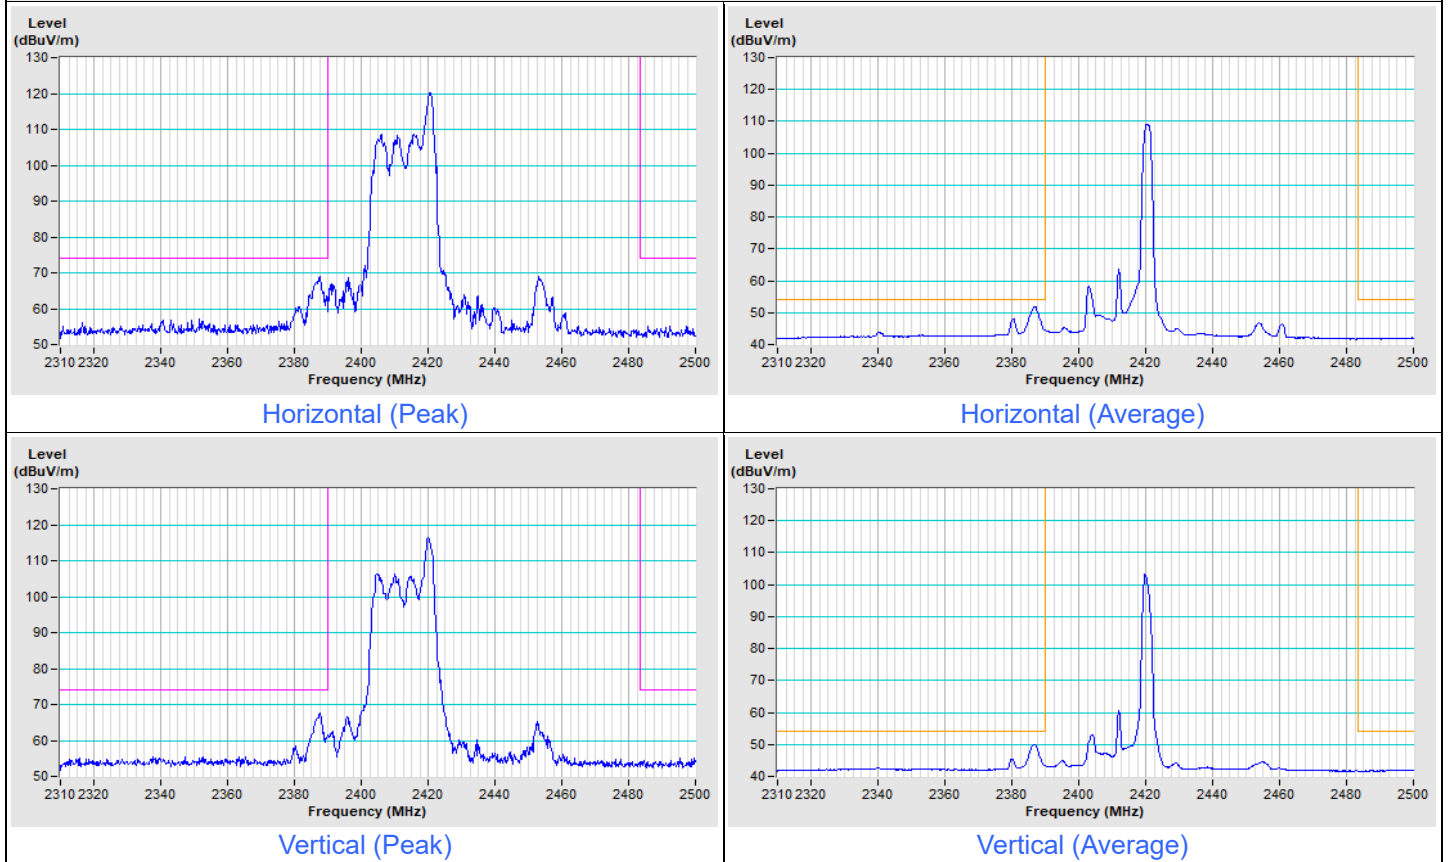


802.11be (EHT20) 26-tone RU Channel 11

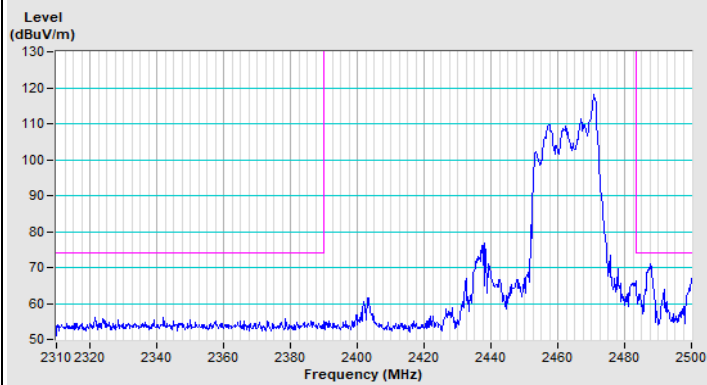


Horizontal (Peak)

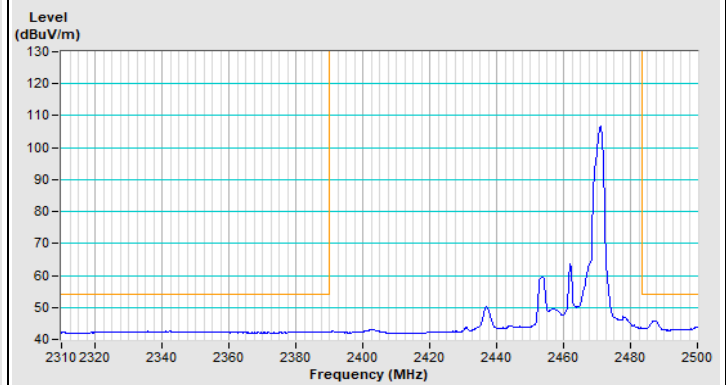

Horizontal (Average)

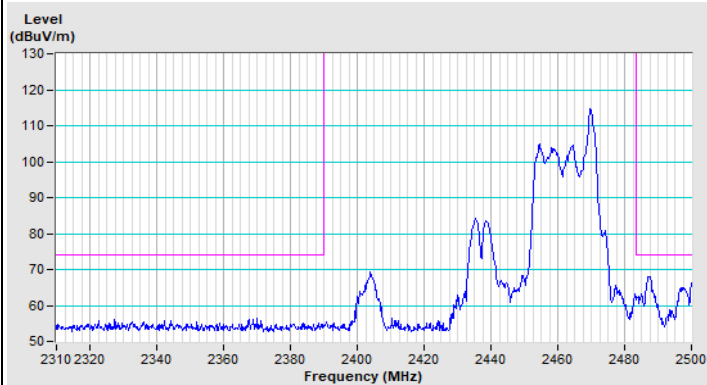


Vertical (Peak)

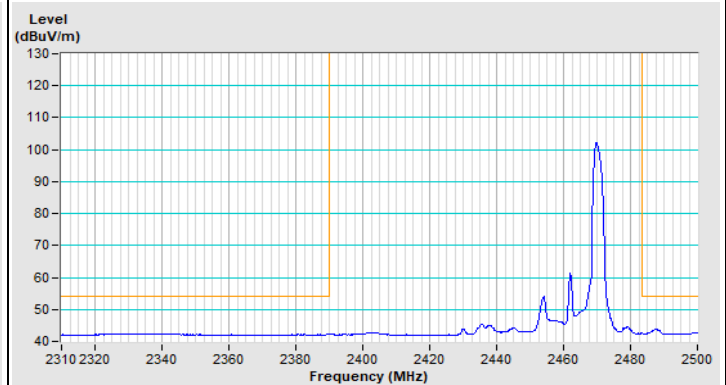


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 12

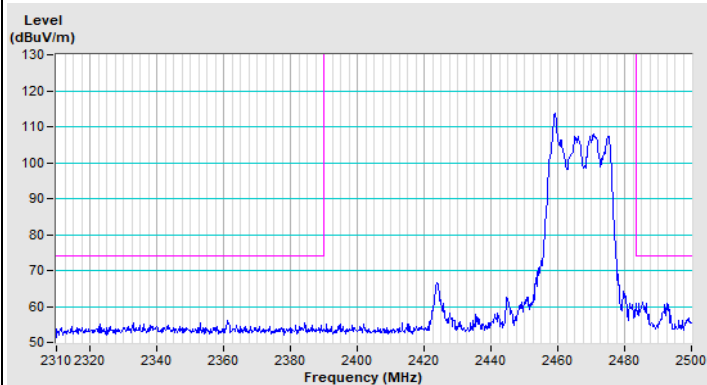


Horizontal (Peak)

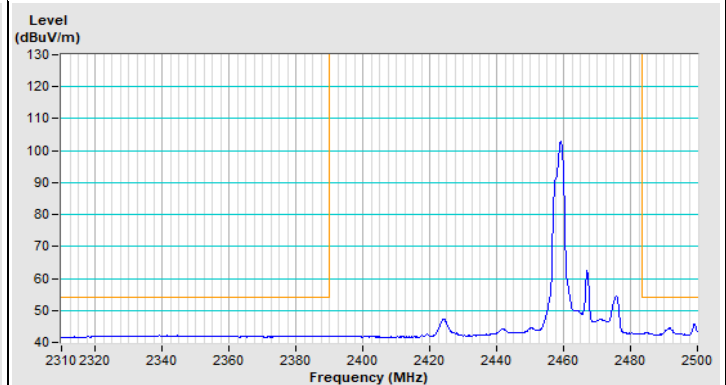

Horizontal (Average)

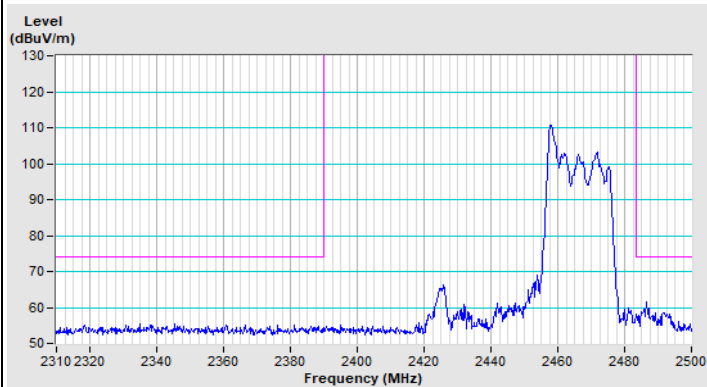


Vertical (Peak)

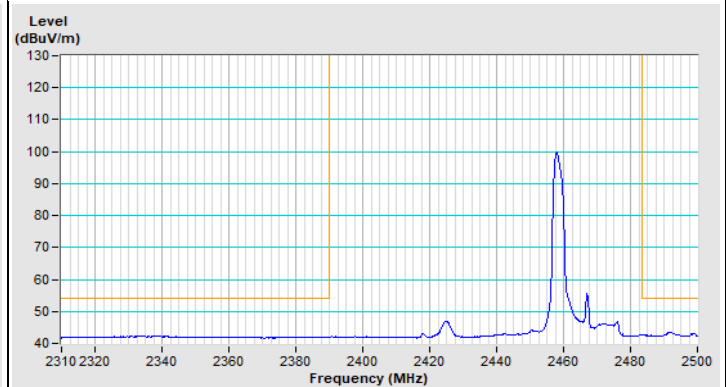


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 13

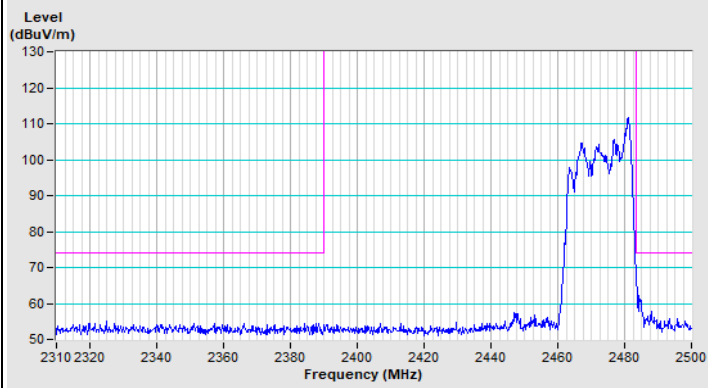


Horizontal (Peak)

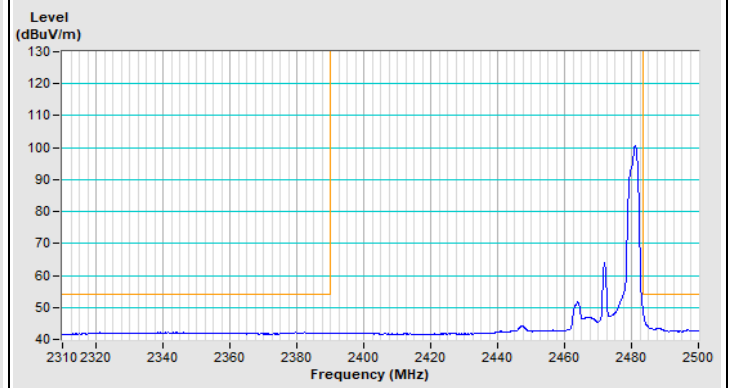

Horizontal (Average)

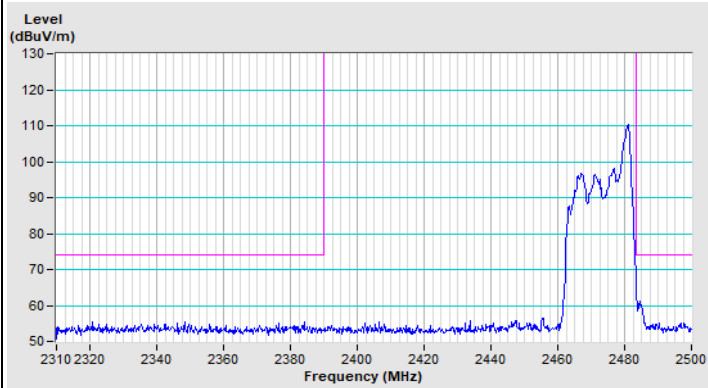


Vertical (Peak)

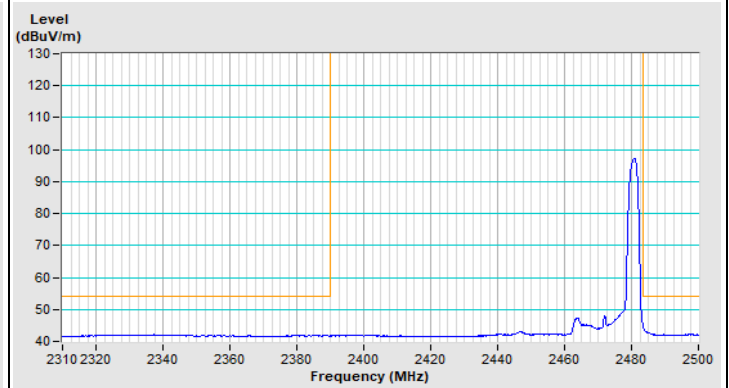


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

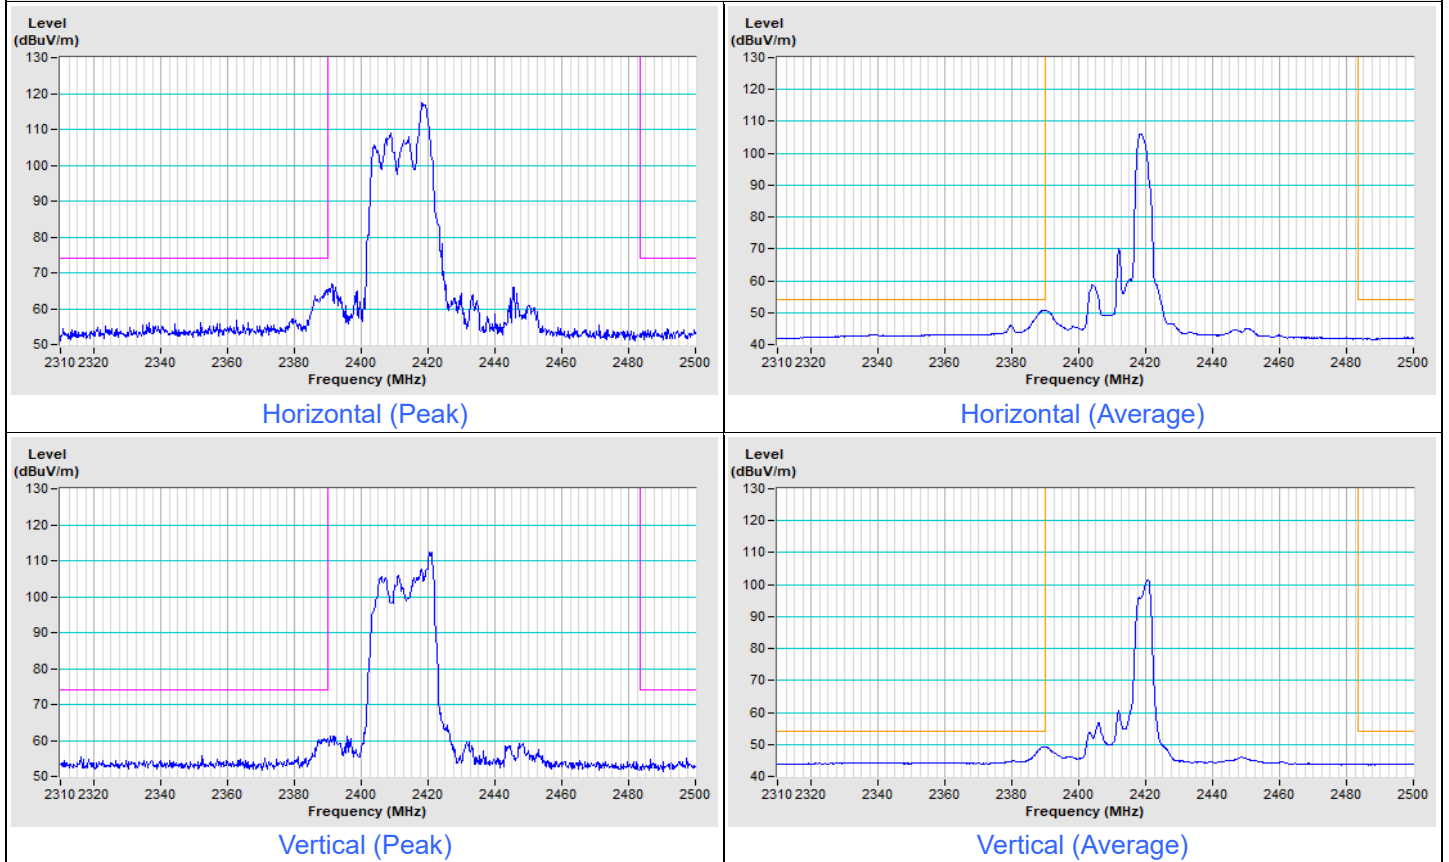


802.11be (EHT20) 52-tone RU Channel 11

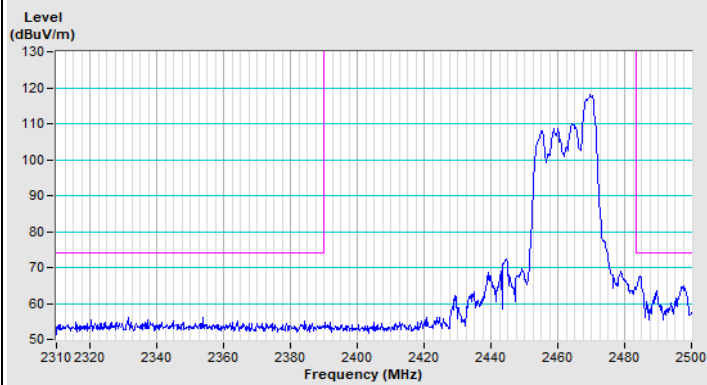


Horizontal (Peak)

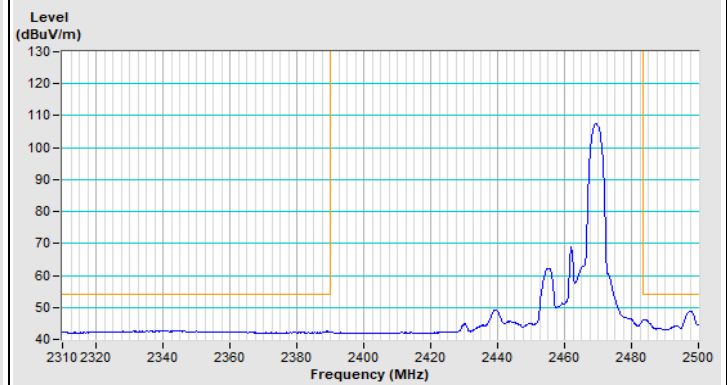

Horizontal (Average)

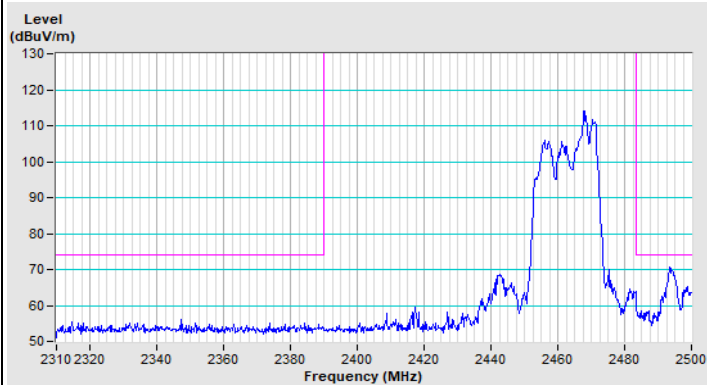


Vertical (Peak)

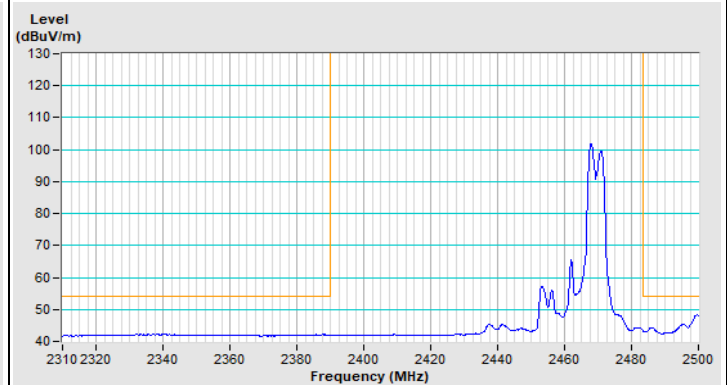


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 12

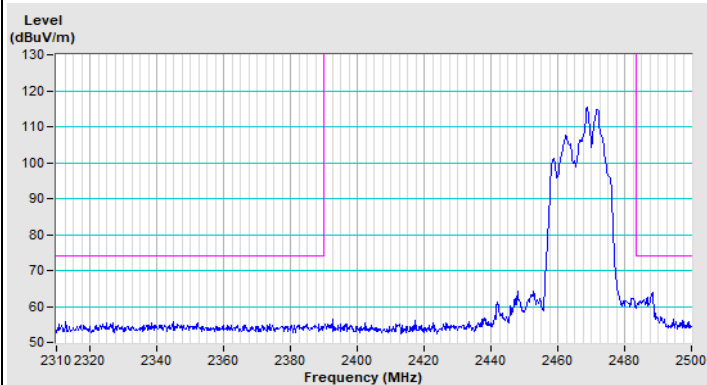


Horizontal (Peak)

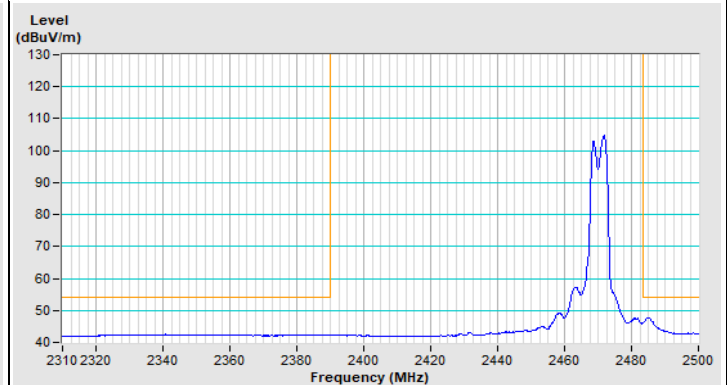

Horizontal (Average)

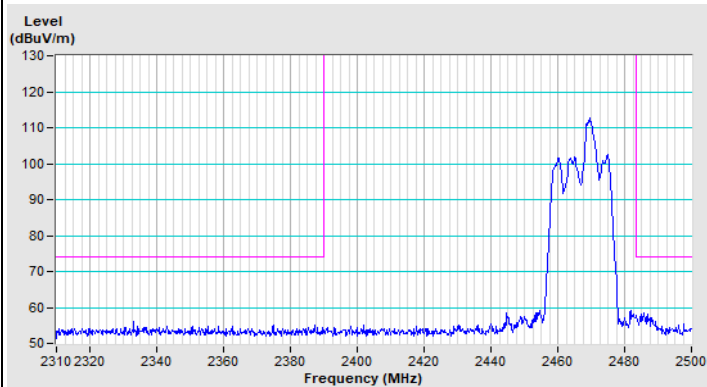


Vertical (Peak)

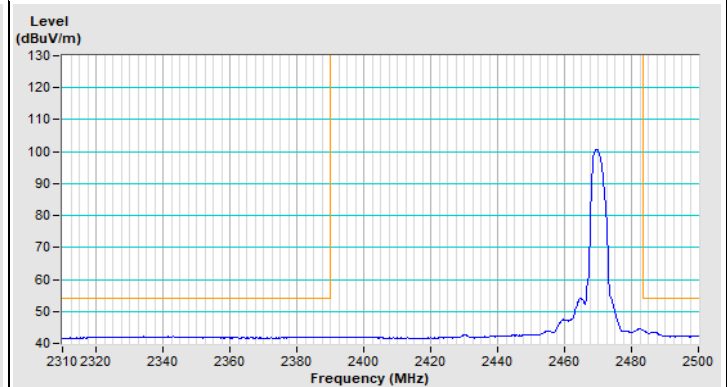


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 13

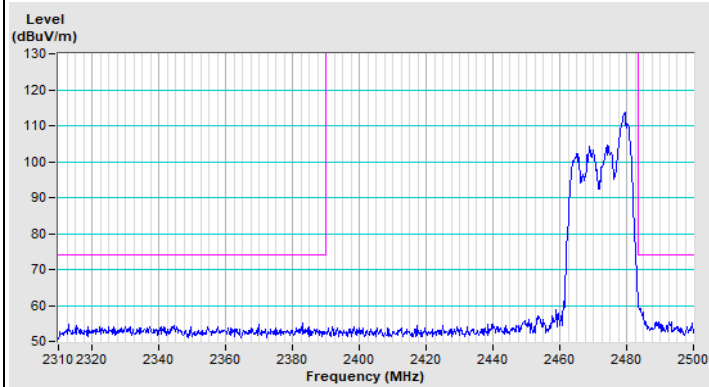


Horizontal (Peak)

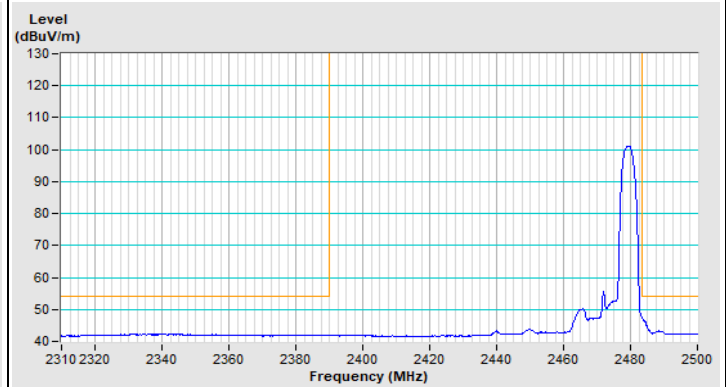

Horizontal (Average)

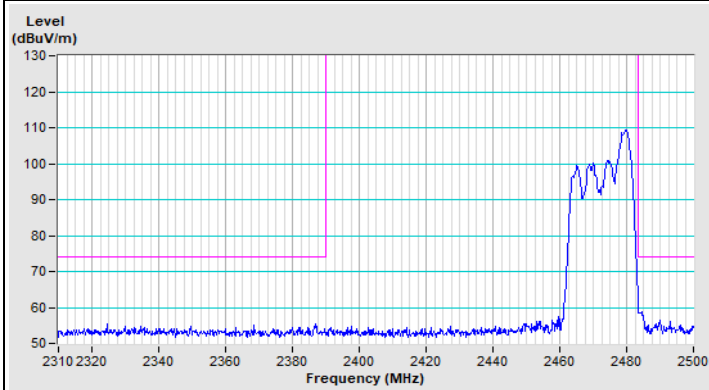


Vertical (Peak)

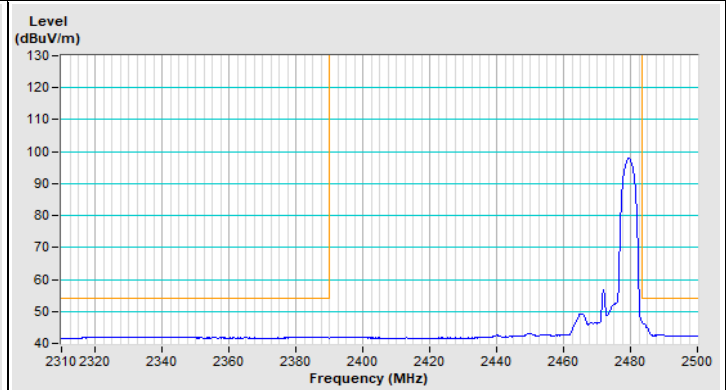


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

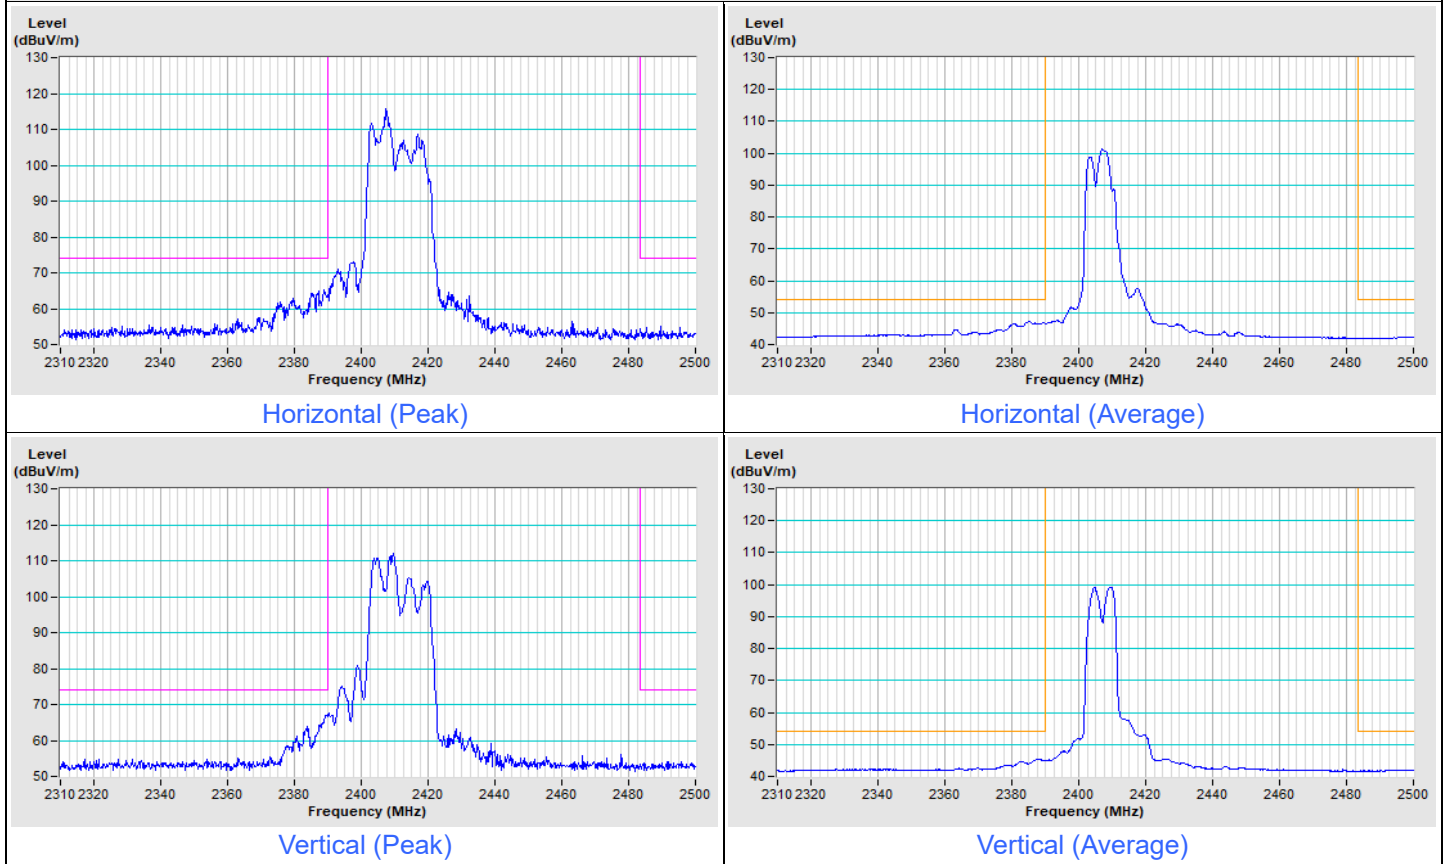


802.11be (EHT20) 106-tone RU Channel 11

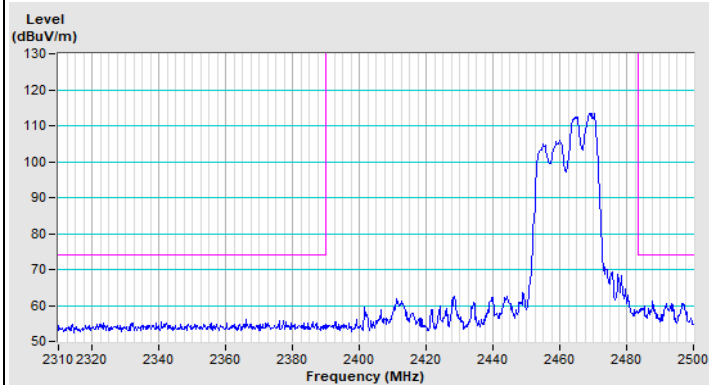


Horizontal (Peak)

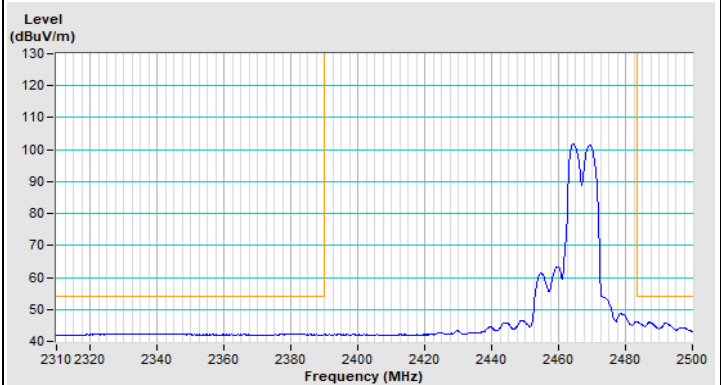

Horizontal (Average)

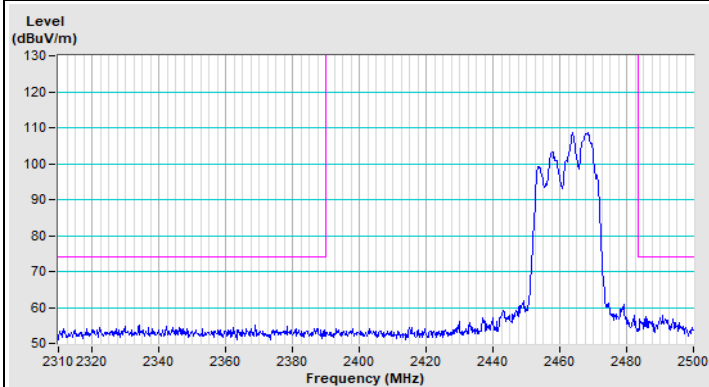


Vertical (Peak)

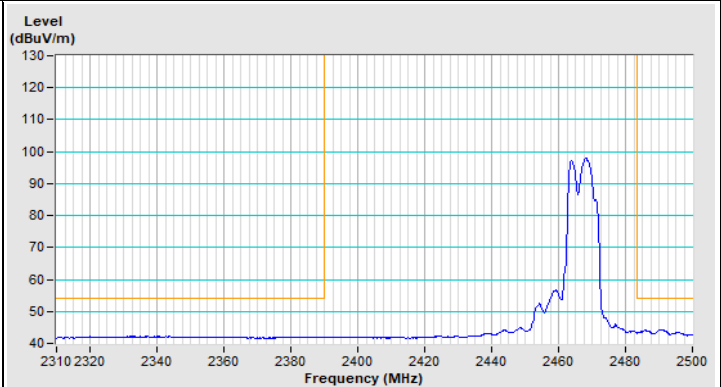


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 12

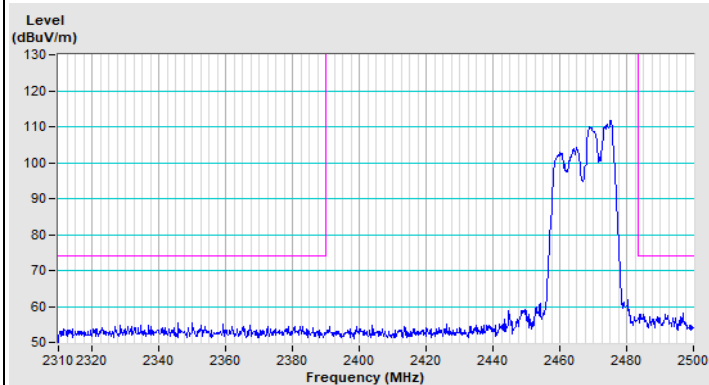


Horizontal (Peak)

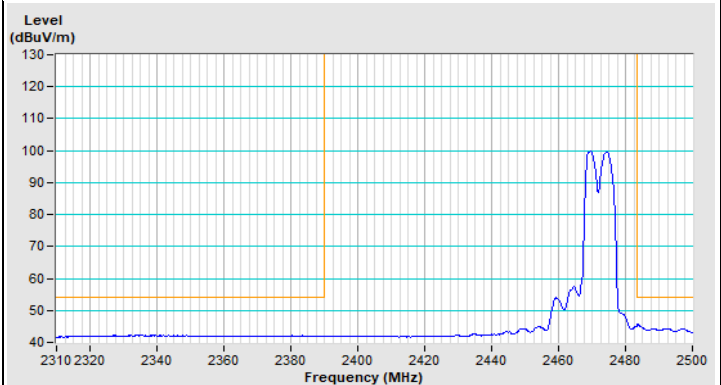

Horizontal (Average)

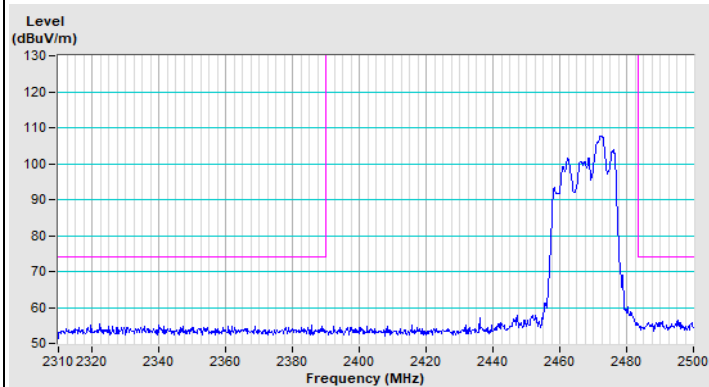


Vertical (Peak)

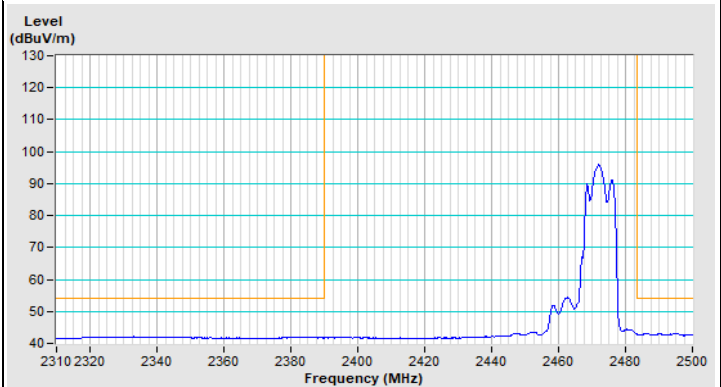


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 13

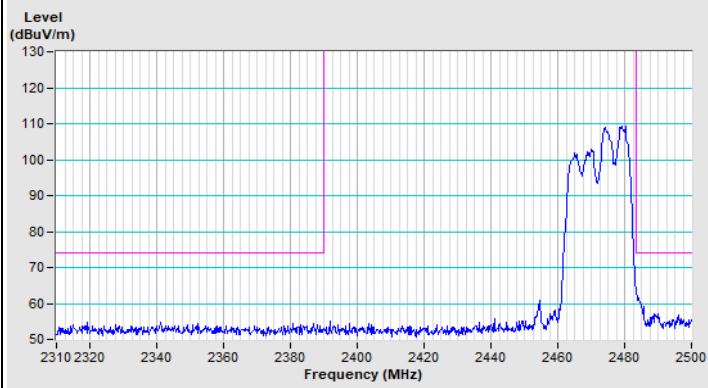


Horizontal (Peak)

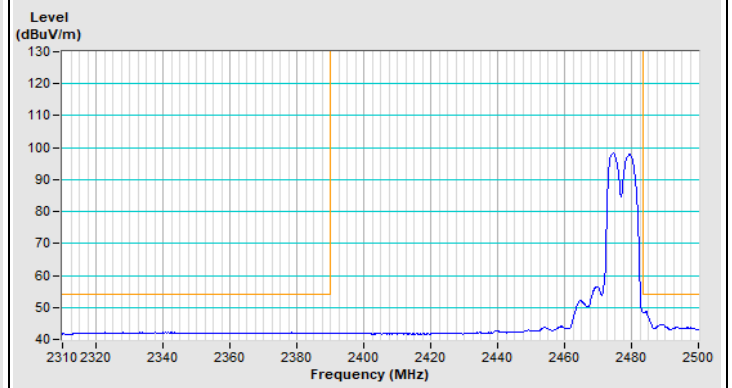

Horizontal (Average)

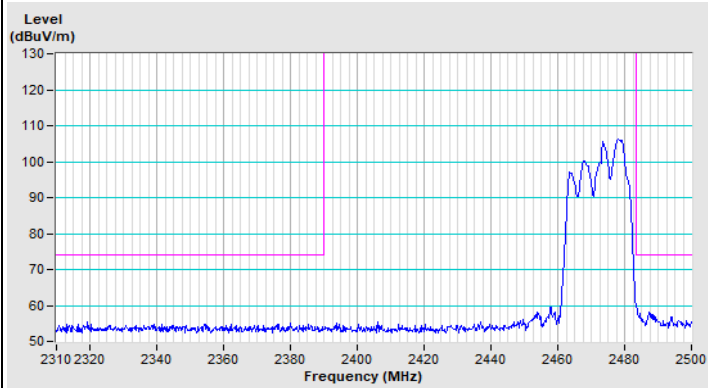

Vertical (Peak)

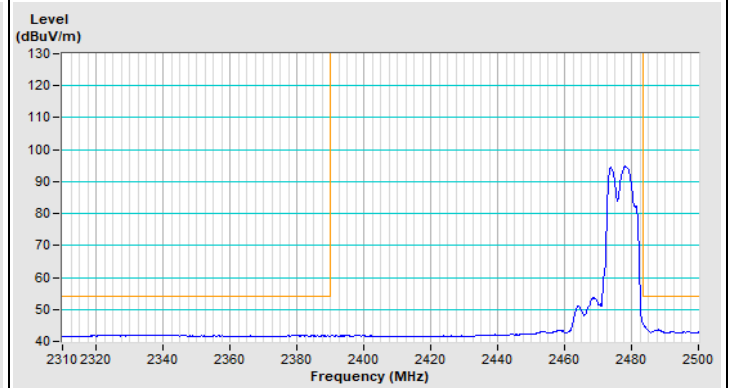

Vertical (Average)

Mode B


1Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.6 PK	74.0	-19.4	2.20 H	117	58.2	-3.6
2	2390.00	43.5 AV	54.0	-10.5	2.20 H	117	47.1	-3.6
3	*2412.00	97.8 PK			2.20 H	117	101.3	-3.5
4	*2412.00	95.1 AV			2.20 H	117	98.6	-3.5
5	4824.00	42.2 PK	74.0	-31.8	1.42 H	357	40.5	1.7
6	4824.00	39.3 AV	54.0	-14.7	1.42 H	357	37.6	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

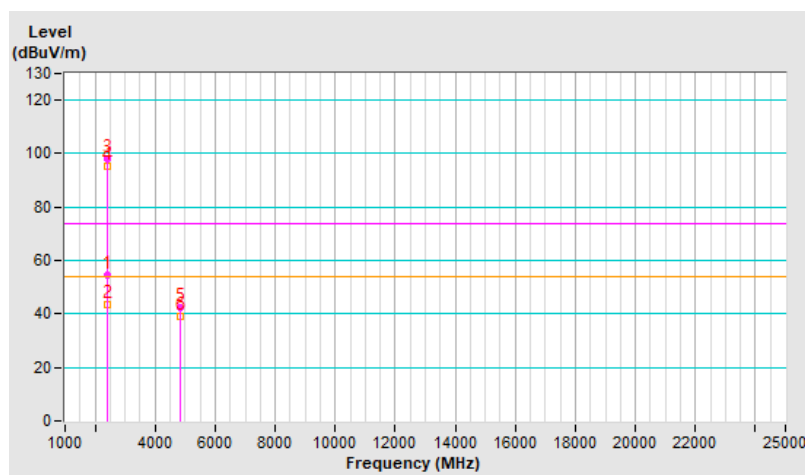


RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.8 PK	74.0	-16.2	1.71 V	322	61.4	-3.6
2	2390.00	49.9 AV	54.0	-4.1	1.71 V	322	53.5	-3.6
3	*2412.00	108.3 PK			1.71 V	322	111.8	-3.5
4	*2412.00	105.4 AV			1.71 V	322	108.9	-3.5
5	4824.00	41.2 PK	74.0	-32.8	1.44 V	334	39.5	1.7
6	4824.00	38.5 AV	54.0	-15.5	1.44 V	334	36.8	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

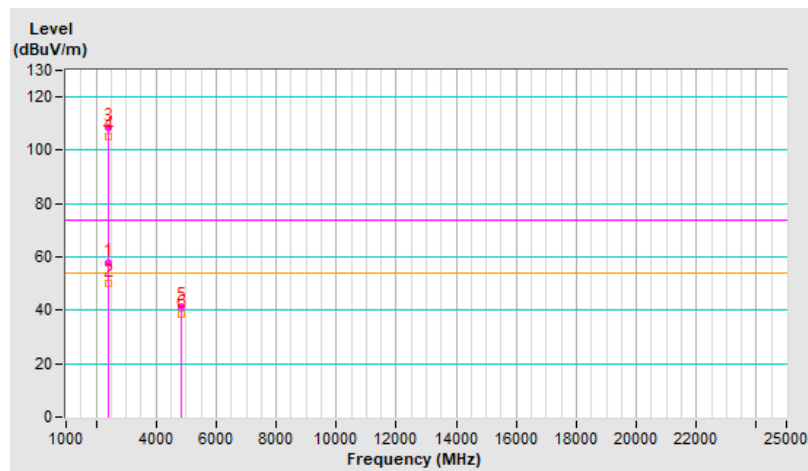


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.3 PK	74.0	-19.7	2.24 H	114	57.9	-3.6
2	2390.00	42.1 AV	54.0	-11.9	2.24 H	114	45.7	-3.6
3	*2437.00	99.2 PK			2.24 H	114	102.7	-3.5
4	*2437.00	96.3 AV			2.24 H	114	99.8	-3.5
5	2483.50	55.1 PK	74.0	-18.9	2.24 H	114	58.5	-3.4
6	2483.50	42.6 AV	54.0	-11.4	2.24 H	114	46.0	-3.4
7	4874.00	42.1 PK	74.0	-31.9	1.47 H	352	40.6	1.5
8	4874.00	39.1 AV	54.0	-14.9	1.47 H	352	37.6	1.5
9	7311.00	48.9 PK	74.0	-25.1	1.43 H	360	41.3	7.6
10	7311.00	43.9 AV	54.0	-10.1	1.43 H	360	36.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

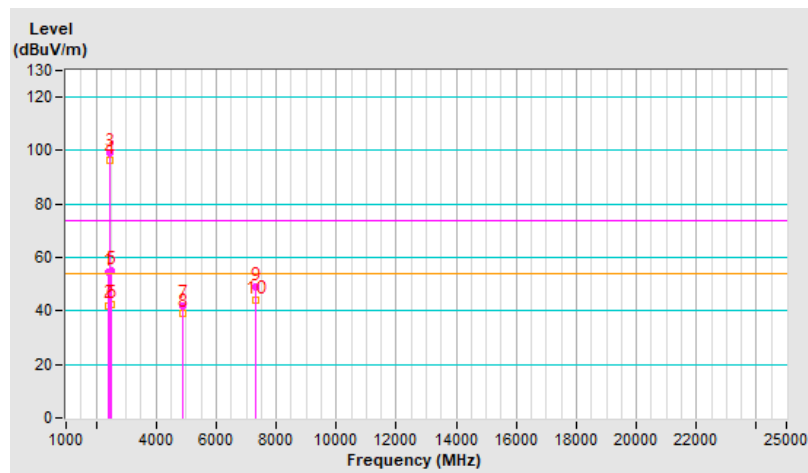


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.1 PK	74.0	-18.9	1.73 V	335	58.7	-3.6
2	2390.00	42.6 AV	54.0	-11.4	1.73 V	335	46.2	-3.6
3	*2437.00	109.5 PK			1.73 V	335	113.0	-3.5
4	*2437.00	106.7 AV			1.73 V	335	110.2	-3.5
5	2483.50	55.3 PK	74.0	-18.7	1.73 V	335	58.7	-3.4
6	2483.50	42.1 AV	54.0	-11.9	1.73 V	335	45.5	-3.4
7	4874.00	42.2 PK	74.0	-31.8	1.40 V	335	40.7	1.5
8	4874.00	39.0 AV	54.0	-15.0	1.40 V	335	37.5	1.5
9	7311.00	47.6 PK	74.0	-26.4	1.21 V	336	40.0	7.6
10	7311.00	43.4 AV	54.0	-10.6	1.21 V	336	35.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

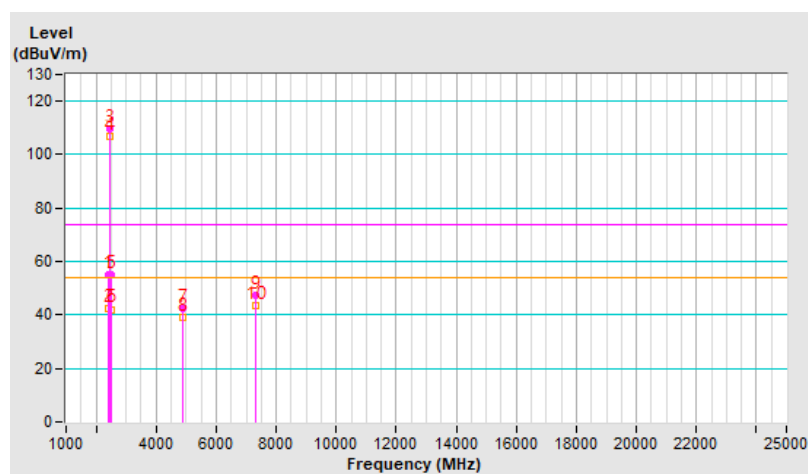


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	96.9 PK			2.17 H	108	100.4	-3.5
2	*2462.00	94.4 AV			2.17 H	108	97.9	-3.5
3	2483.50	54.3 PK	74.0	-19.7	2.17 H	108	57.7	-3.4
4	2483.50	43.5 AV	54.0	-10.5	2.17 H	108	46.9	-3.4
5	4924.00	41.5 PK	74.0	-32.5	1.37 H	348	39.9	1.6
6	4924.00	38.6 AV	54.0	-15.4	1.37 H	348	37.0	1.6
7	7386.00	48.7 PK	74.0	-25.3	1.40 H	359	40.8	7.9
8	7386.00	44.2 AV	54.0	-9.8	1.40 H	359	36.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

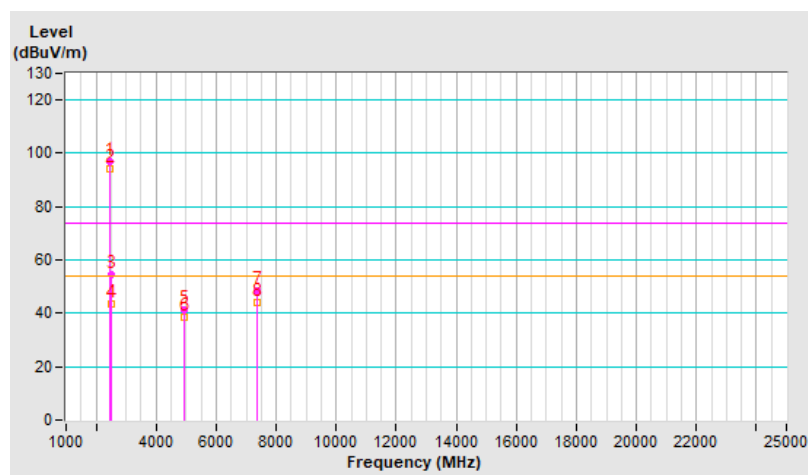


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.1 PK			1.68 V	314	110.6	-3.5
2	*2462.00	104.5 AV			1.68 V	314	108.0	-3.5
3	2483.50	57.5 PK	74.0	-16.5	1.68 V	314	60.9	-3.4
4	2483.50	49.1 AV	54.0	-4.9	1.68 V	314	52.5	-3.4
5	4924.00	41.8 PK	74.0	-32.2	1.40 V	360	40.2	1.6
6	4924.00	39.1 AV	54.0	-14.9	1.40 V	360	37.5	1.6
7	7386.00	48.4 PK	74.0	-25.6	1.15 V	331	40.5	7.9
8	7386.00	44.3 AV	54.0	-9.7	1.15 V	331	36.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

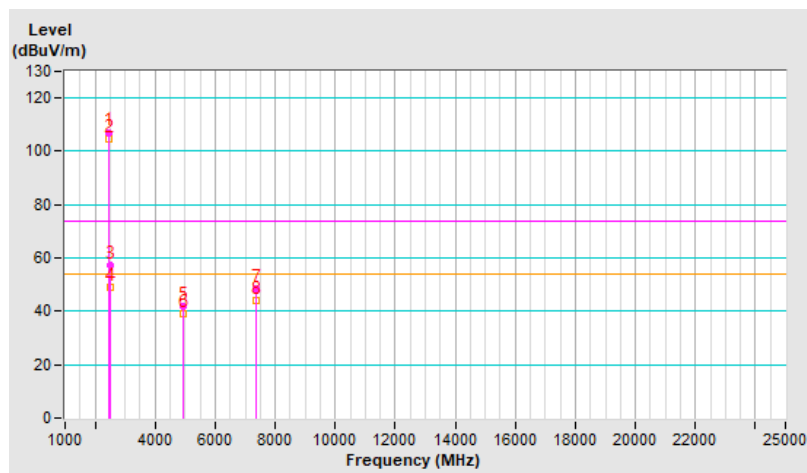


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	90.7 PK			2.19 H	111	94.1	-3.4
2	*2467.00	88.4 AV			2.19 H	111	91.8	-3.4
3	2483.50	54.5 PK	74.0	-19.5	2.19 H	111	57.9	-3.4
4	2483.50	42.7 AV	54.0	-11.3	2.19 H	111	46.1	-3.4
5	4934.00	41.2 PK	74.0	-32.8	1.46 H	360	39.6	1.6
6	4934.00	38.8 AV	54.0	-15.2	1.46 H	360	37.2	1.6
7	7401.00	48.8 PK	74.0	-25.2	1.39 H	360	40.9	7.9
8	7401.00	44.3 AV	54.0	-9.7	1.39 H	360	36.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

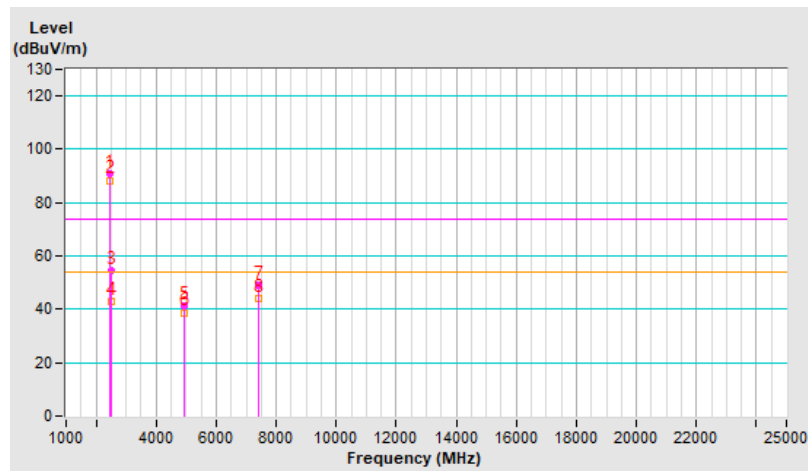


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	102.9 PK			1.67 V	311	106.3	-3.4
2	*2467.00	99.8 AV			1.67 V	311	103.2	-3.4
3	2483.50	57.5 PK	74.0	-16.5	1.67 V	311	60.9	-3.4
4	2483.50	48.5 AV	54.0	-5.5	1.67 V	311	51.9	-3.4
5	4934.00	41.7 PK	74.0	-32.3	1.42 V	333	40.1	1.6
6	4934.00	38.5 AV	54.0	-15.5	1.42 V	333	36.9	1.6
7	7401.00	48.2 PK	74.0	-25.8	1.15 V	326	40.3	7.9
8	7401.00	43.9 AV	54.0	-10.1	1.15 V	326	36.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

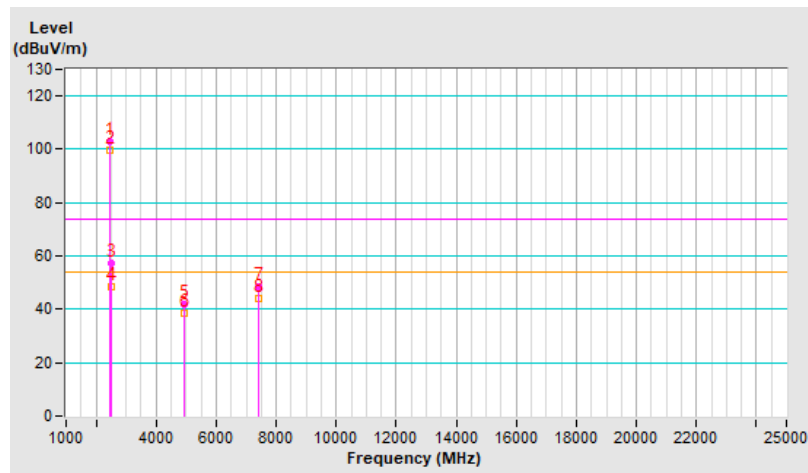


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	87.9 PK			2.26 H	123	91.3	-3.4
2	*2472.00	85.1 AV			2.26 H	123	88.5	-3.4
3	2483.50	55.6 PK	74.0	-18.4	2.26 H	123	59.0	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.26 H	123	45.7	-3.4
5	4944.00	41.5 PK	74.0	-32.5	1.44 H	360	39.9	1.6
6	4944.00	39.0 AV	54.0	-15.0	1.44 H	360	37.4	1.6
7	7416.00	49.1 PK	74.0	-24.9	1.41 H	356	41.3	7.8
8	7416.00	44.5 AV	54.0	-9.5	1.41 H	356	36.7	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

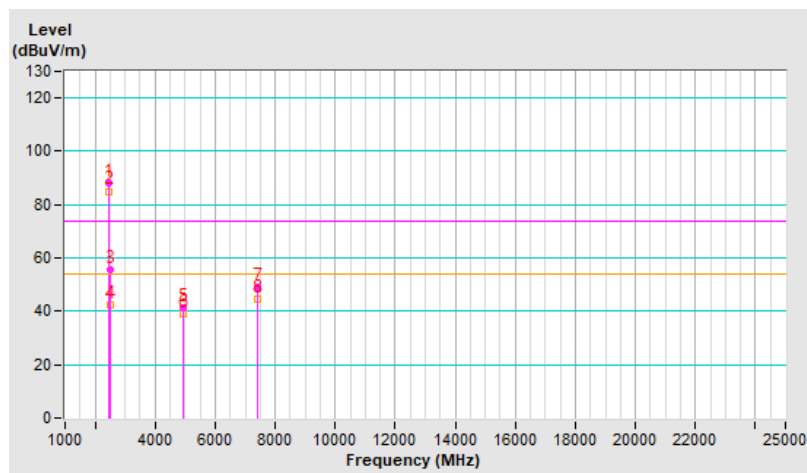


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.5 PK			1.71 V	320	102.9	-3.4
2	*2472.00	96.5 AV			1.71 V	320	99.9	-3.4
3	2483.50	58.1 PK	74.0	-15.9	1.71 V	320	61.5	-3.4
4	2483.50	51.6 AV	54.0	-2.4	1.71 V	320	55.0	-3.4
5	4944.00	41.5 PK	74.0	-32.5	1.47 V	340	39.9	1.6
6	4944.00	38.6 AV	54.0	-15.4	1.47 V	340	37.0	1.6
7	7416.00	48.5 PK	74.0	-25.5	1.17 V	349	40.7	7.8
8	7416.00	43.9 AV	54.0	-10.1	1.17 V	349	36.1	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

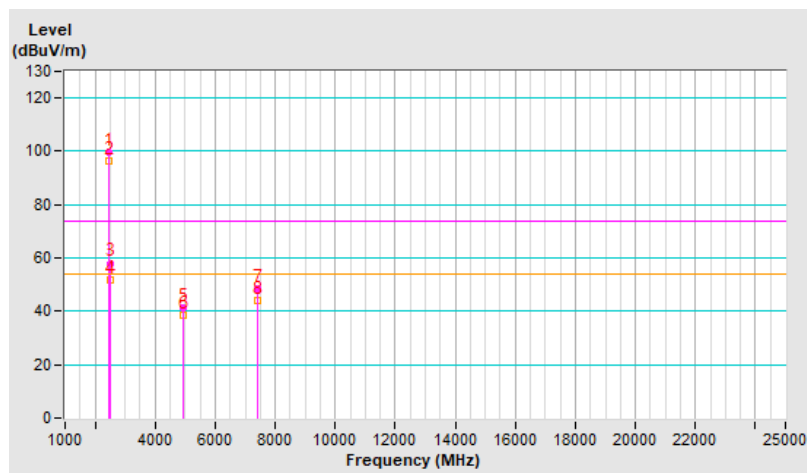


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.3 PK	74.0	-15.7	2.24 H	130	61.9	-3.6
2	2390.00	42.5 AV	54.0	-11.5	2.24 H	130	46.1	-3.6
3	*2412.00	100.8 PK			2.24 H	130	104.3	-3.5
4	*2412.00	91.1 AV			2.24 H	130	94.6	-3.5
5	4824.00	41.7 PK	74.0	-32.3	1.38 H	360	40.0	1.7
6	4824.00	38.8 AV	54.0	-15.2	1.38 H	360	37.1	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

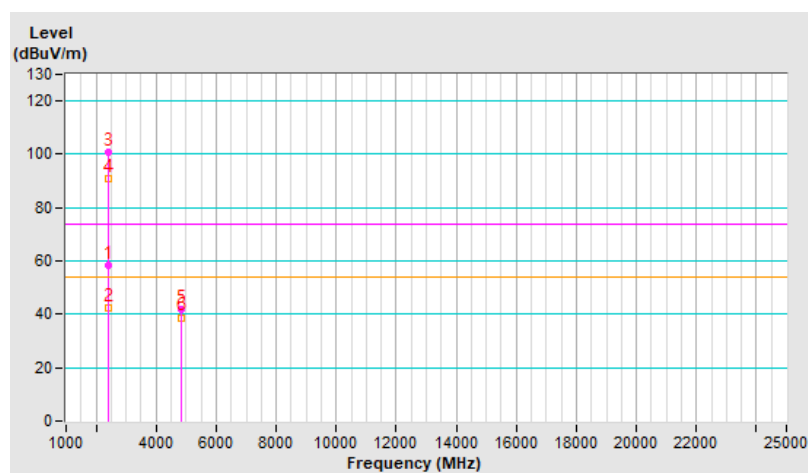


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.74 V	325	66.1	-3.6
2	2390.00	46.1 AV	54.0	-7.9	1.74 V	325	49.7	-3.6
3	*2412.00	110.5 PK			1.74 V	325	114.0	-3.5
4	*2412.00	101.5 AV			1.74 V	325	105.0	-3.5
5	4824.00	42.0 PK	74.0	-32.0	1.52 V	336	40.3	1.7
6	4824.00	39.1 AV	54.0	-14.9	1.52 V	336	37.4	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

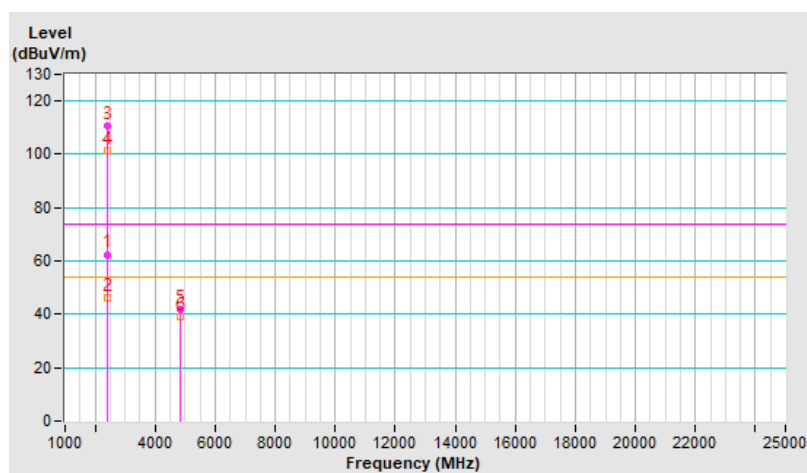


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.3 PK	74.0	-19.7	2.20 H	112	57.9	-3.6
2	2390.00	42.1 AV	54.0	-11.9	2.20 H	112	45.7	-3.6
3	*2437.00	103.2 PK			2.20 H	112	106.7	-3.5
4	*2437.00	93.1 AV			2.20 H	112	96.6	-3.5
5	2483.50	56.1 PK	74.0	-17.9	2.20 H	112	59.5	-3.4
6	2483.50	43.5 AV	54.0	-10.5	2.20 H	112	46.9	-3.4
7	4874.00	41.3 PK	74.0	-32.7	1.42 H	359	39.8	1.5
8	4874.00	38.7 AV	54.0	-15.3	1.42 H	359	37.2	1.5
9	7311.00	49.3 PK	74.0	-24.7	1.32 H	354	41.7	7.6
10	7311.00	44.7 AV	54.0	-9.3	1.32 H	354	37.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

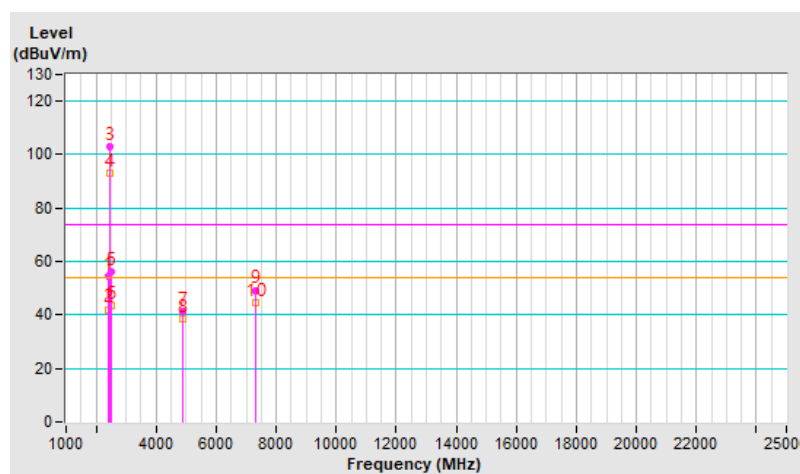


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.2 PK	74.0	-18.8	1.71 V	311	58.8	-3.6
2	2390.00	43.1 AV	54.0	-10.9	1.71 V	311	46.7	-3.6
3	*2437.00	112.8 PK			1.71 V	311	116.3	-3.5
4	*2437.00	103.2 AV			1.71 V	311	106.7	-3.5
5	2483.50	57.6 PK	74.0	-16.4	1.71 V	311	61.0	-3.4
6	2483.50	43.8 AV	54.0	-10.2	1.71 V	311	47.2	-3.4
7	4874.00	41.3 PK	74.0	-32.7	1.44 V	341	39.8	1.5
8	4874.00	38.5 AV	54.0	-15.5	1.44 V	341	37.0	1.5
9	7311.00	48.0 PK	74.0	-26.0	1.19 V	343	40.4	7.6
10	7311.00	43.4 AV	54.0	-10.6	1.19 V	343	35.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

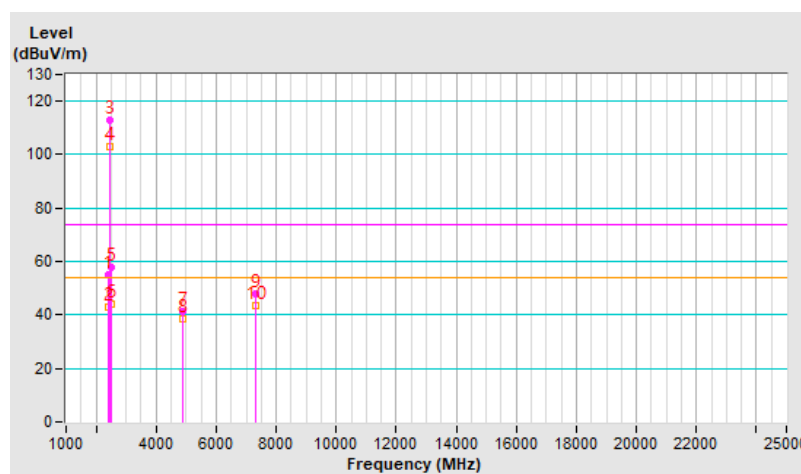


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.3 PK			2.20 H	120	102.8	-3.5
2	*2462.00	90.3 AV			2.20 H	120	93.8	-3.5
3	2483.50	60.5 PK	74.0	-13.5	2.20 H	120	63.9	-3.4
4	2483.50	43.5 AV	54.0	-10.5	2.20 H	120	46.9	-3.4
5	4924.00	42.1 PK	74.0	-31.9	1.47 H	360	40.5	1.6
6	4924.00	39.3 AV	54.0	-14.7	1.47 H	360	37.7	1.6
7	7386.00	49.4 PK	74.0	-24.6	1.39 H	347	41.5	7.9
8	7386.00	44.7 AV	54.0	-9.3	1.39 H	347	36.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

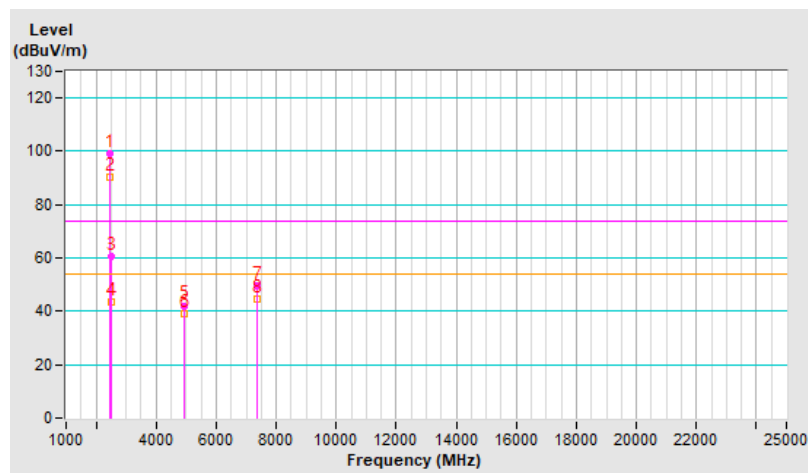


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.2 PK			1.66 V	334	113.7	-3.5
2	*2462.00	101.2 AV			1.66 V	334	104.7	-3.5
3	2483.50	68.2 PK	74.0	-5.8	1.66 V	334	71.6	-3.4
4	2483.50	47.6 AV	54.0	-6.4	1.66 V	334	51.0	-3.4
5	4924.00	42.1 PK	74.0	-31.9	1.44 V	358	40.5	1.6
6	4924.00	39.0 AV	54.0	-15.0	1.44 V	358	37.4	1.6
7	7386.00	47.8 PK	74.0	-26.2	1.12 V	346	39.9	7.9
8	7386.00	43.4 AV	54.0	-10.6	1.12 V	346	35.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

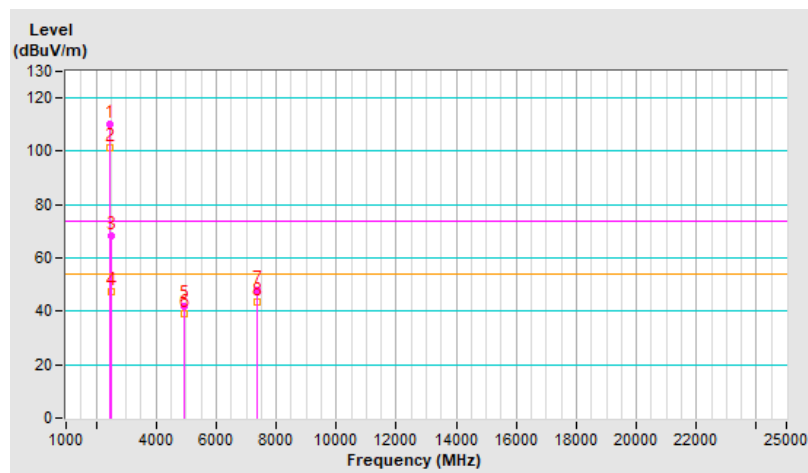


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	98.4 PK			2.24 H	118	101.8	-3.4
2	*2467.00	89.1 AV			2.24 H	118	92.5	-3.4
3	2483.50	61.2 PK	74.0	-12.8	2.24 H	118	64.6	-3.4
4	2483.50	43.1 AV	54.0	-10.9	2.24 H	118	46.5	-3.4
5	4934.00	41.5 PK	74.0	-32.5	1.44 H	359	39.9	1.6
6	4934.00	39.1 AV	54.0	-14.9	1.44 H	359	37.5	1.6
7	7401.00	49.4 PK	74.0	-24.6	1.42 H	358	41.5	7.9
8	7401.00	44.8 AV	54.0	-9.2	1.42 H	358	36.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

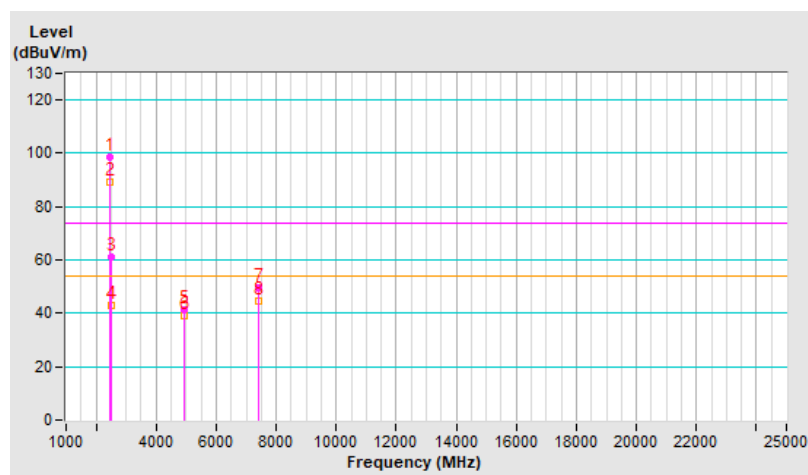


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.5 PK			1.73 V	330	112.9	-3.4
2	*2467.00	100.2 AV			1.73 V	330	103.6	-3.4
3	2483.50	70.4 PK	74.0	-3.6	1.73 V	330	73.8	-3.4
4	2483.50	48.5 AV	54.0	-5.5	1.73 V	330	51.9	-3.4
5	4934.00	41.9 PK	74.0	-32.1	1.50 V	360	40.3	1.6
6	4934.00	38.6 AV	54.0	-15.4	1.50 V	360	37.0	1.6
7	7401.00	48.0 PK	74.0	-26.0	1.16 V	355	40.1	7.9
8	7401.00	43.8 AV	54.0	-10.2	1.16 V	355	35.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

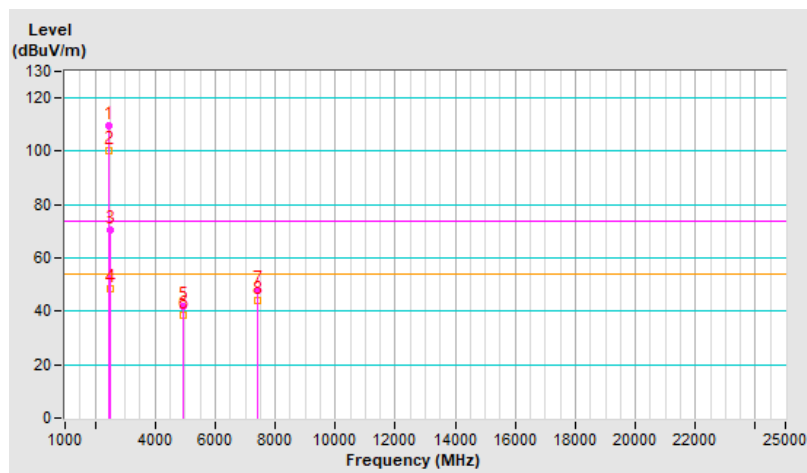


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	97.3 PK			2.19 H	132	100.7	-3.4
2	*2472.00	88.2 AV			2.19 H	132	91.6	-3.4
3	2483.50	55.1 PK	74.0	-18.9	2.19 H	132	58.5	-3.4
4	2483.50	44.3 AV	54.0	-9.7	2.19 H	132	47.7	-3.4
5	4944.00	41.4 PK	74.0	-32.6	1.47 H	354	39.8	1.6
6	4944.00	38.6 AV	54.0	-15.4	1.47 H	354	37.0	1.6
7	7416.00	49.1 PK	74.0	-24.9	1.41 H	360	41.3	7.8
8	7416.00	44.1 AV	54.0	-9.9	1.41 H	360	36.3	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

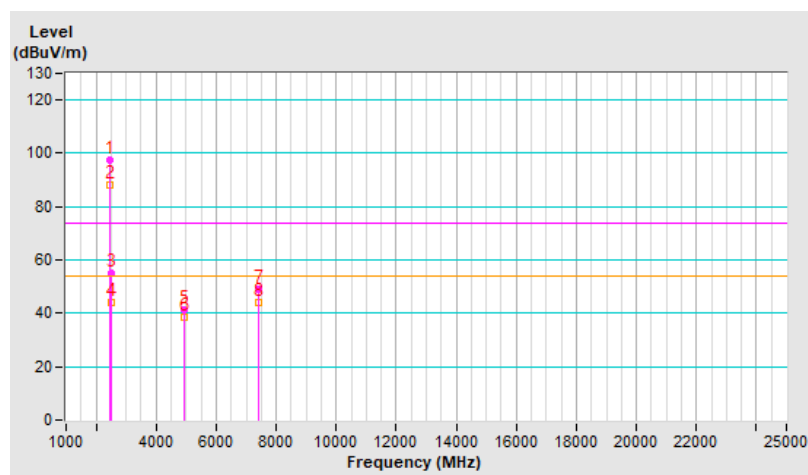


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.2 PK			1.71 V	308	111.6	-3.4
2	*2472.00	99.1 AV			1.71 V	308	102.5	-3.4
3	2483.50	66.7 PK	74.0	-7.3	1.71 V	308	70.1	-3.4
4	2483.50	50.8 AV	54.0	-3.2	1.71 V	308	54.2	-3.4
5	4944.00	41.2 PK	74.0	-32.8	1.41 V	352	39.6	1.6
6	4944.00	38.4 AV	54.0	-15.6	1.41 V	352	36.8	1.6
7	7416.00	48.4 PK	74.0	-25.6	1.23 V	334	40.6	7.8
8	7416.00	44.2 AV	54.0	-9.8	1.23 V	334	36.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

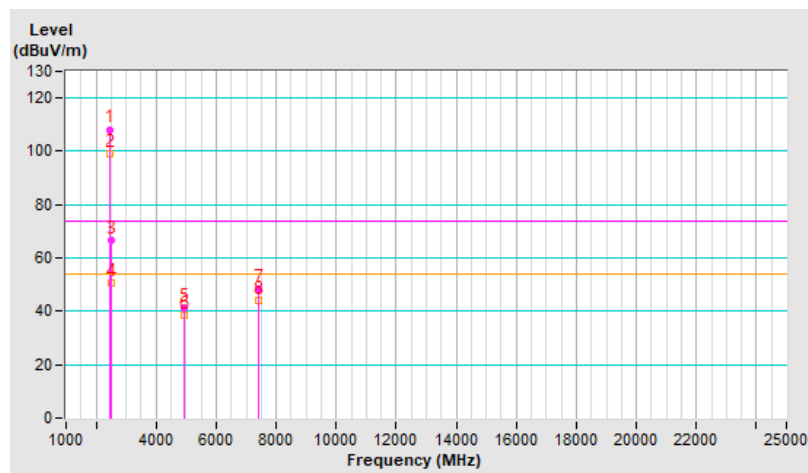


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	2.14 H	105	65.1	-3.6
2	2390.00	42.0 AV	54.0	-12.0	2.14 H	105	45.6	-3.6
3	*2412.00	101.1 PK			2.14 H	105	104.6	-3.5
4	*2412.00	88.5 AV			2.14 H	105	92.0	-3.5
5	4824.00	41.5 PK	74.0	-32.5	1.40 H	350	39.8	1.7
6	4824.00	38.8 AV	54.0	-15.2	1.40 H	350	37.1	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

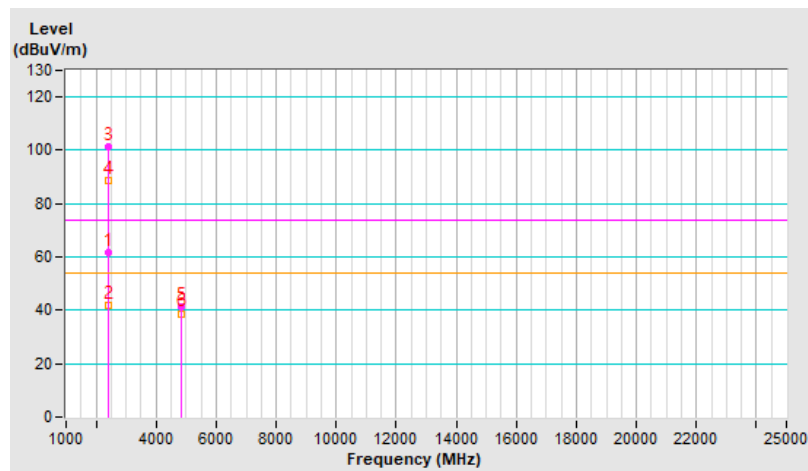


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.5 PK	74.0	-2.5	1.71 V	316	75.1	-3.6
2	2390.00	44.7 AV	54.0	-9.3	1.71 V	316	48.3	-3.6
3	*2412.00	111.3 PK			1.71 V	316	114.8	-3.5
4	*2412.00	100.6 AV			1.71 V	316	104.1	-3.5
5	4824.00	41.3 PK	74.0	-32.7	1.44 V	337	39.6	1.7
6	4824.00	38.7 AV	54.0	-15.3	1.44 V	337	37.0	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

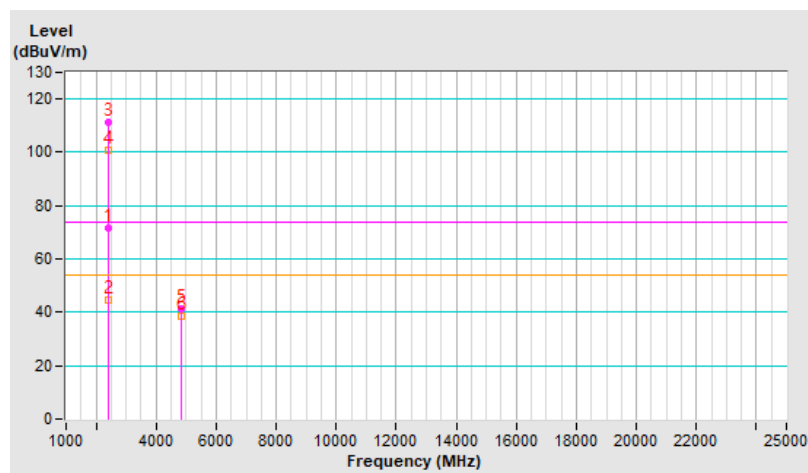


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	2.24 H	114	58.9	-3.6
2	2390.00	42.1 AV	54.0	-11.9	2.24 H	114	45.7	-3.6
3	*2437.00	104.1 PK			2.24 H	114	107.6	-3.5
4	*2437.00	94.5 AV			2.24 H	114	98.0	-3.5
5	2483.50	55.4 PK	74.0	-18.6	2.24 H	114	58.8	-3.4
6	2483.50	42.3 AV	54.0	-11.7	2.24 H	114	45.7	-3.4
7	4874.00	41.3 PK	74.0	-32.7	1.47 H	344	39.8	1.5
8	4874.00	38.8 AV	54.0	-15.2	1.47 H	344	37.3	1.5
9	7311.00	49.8 PK	74.0	-24.2	1.40 H	360	42.2	7.6
10	7311.00	44.8 AV	54.0	-9.2	1.40 H	360	37.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

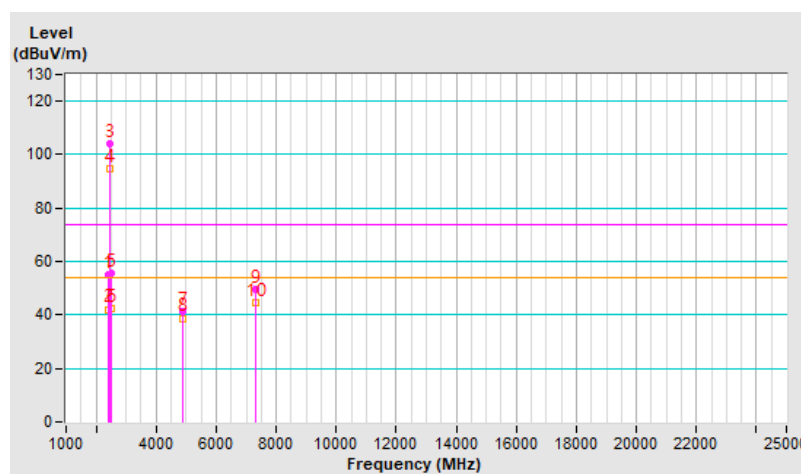


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	1.74 V	323	68.1	-3.6
2	2390.00	43.5 AV	54.0	-10.5	1.74 V	323	47.1	-3.6
3	*2437.00	114.1 PK			1.74 V	323	117.6	-3.5
4	*2437.00	102.1 AV			1.74 V	323	105.6	-3.5
5	2483.50	62.2 PK	74.0	-11.8	1.74 V	323	65.6	-3.4
6	2483.50	43.1 AV	54.0	-10.9	1.74 V	323	46.5	-3.4
7	4874.00	41.5 PK	74.0	-32.5	1.43 V	359	40.0	1.5
8	4874.00	38.6 AV	54.0	-15.4	1.43 V	359	37.1	1.5
9	7311.00	47.8 PK	74.0	-26.2	1.19 V	344	40.2	7.6
10	7311.00	43.7 AV	54.0	-10.3	1.19 V	344	36.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

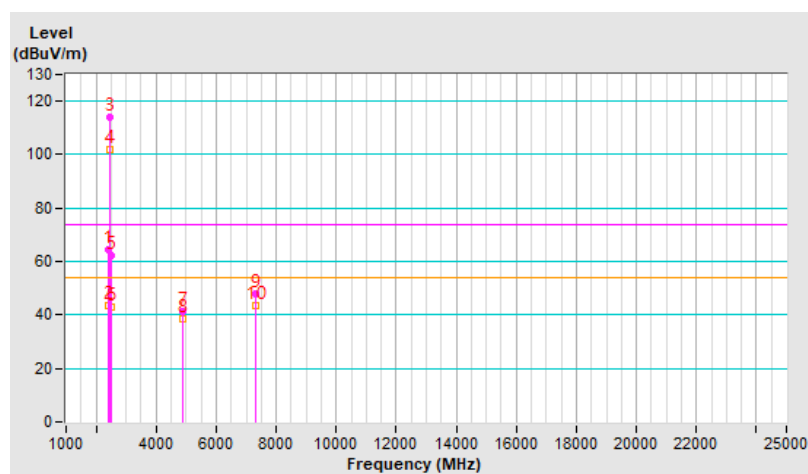


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.3 PK			2.21 H	105	103.8	-3.5
2	*2462.00	88.2 AV			2.21 H	105	91.7	-3.5
3	2483.50	61.4 PK	74.0	-12.6	2.21 H	105	64.8	-3.4
4	2483.50	42.6 AV	54.0	-11.4	2.21 H	105	46.0	-3.4
5	4924.00	41.3 PK	74.0	-32.7	1.37 H	351	39.7	1.6
6	4924.00	38.9 AV	54.0	-15.1	1.37 H	351	37.3	1.6
7	7386.00	48.6 PK	74.0	-25.4	1.41 H	360	40.7	7.9
8	7386.00	43.9 AV	54.0	-10.1	1.41 H	360	36.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

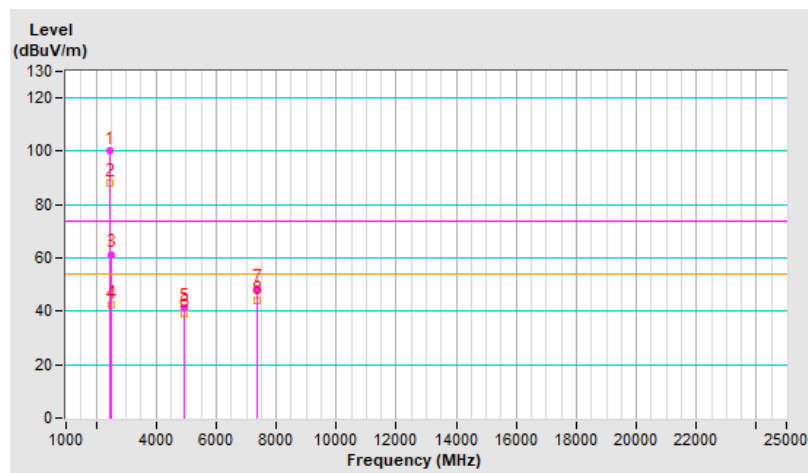


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.2 PK			1.74 V	311	114.7	-3.5
2	*2462.00	99.5 AV			1.74 V	311	103.0	-3.5
3	2483.50	69.5 PK	74.0	-4.5	1.74 V	311	72.9	-3.4
4	2483.50	46.4 AV	54.0	-7.6	1.74 V	311	49.8	-3.4
5	4924.00	41.2 PK	74.0	-32.8	1.43 V	334	39.6	1.6
6	4924.00	38.2 AV	54.0	-15.8	1.43 V	334	36.6	1.6
7	7386.00	48.0 PK	74.0	-26.0	1.14 V	323	40.1	7.9
8	7386.00	43.5 AV	54.0	-10.5	1.14 V	323	35.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

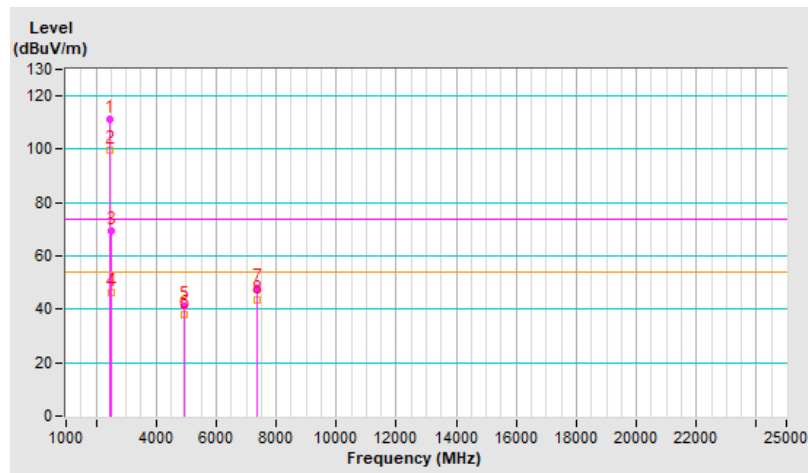


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	99.5 PK			2.15 H	110	102.9	-3.4
2	*2467.00	87.5 AV			2.15 H	110	90.9	-3.4
3	2483.50	57.6 PK	74.0	-16.4	2.15 H	110	61.0	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.15 H	110	45.7	-3.4
5	4934.00	41.8 PK	74.0	-32.2	1.42 H	359	40.2	1.6
6	4934.00	39.0 AV	54.0	-15.0	1.42 H	359	37.4	1.6
7	7401.00	49.5 PK	74.0	-24.5	1.38 H	352	41.6	7.9
8	7401.00	44.7 AV	54.0	-9.3	1.38 H	352	36.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

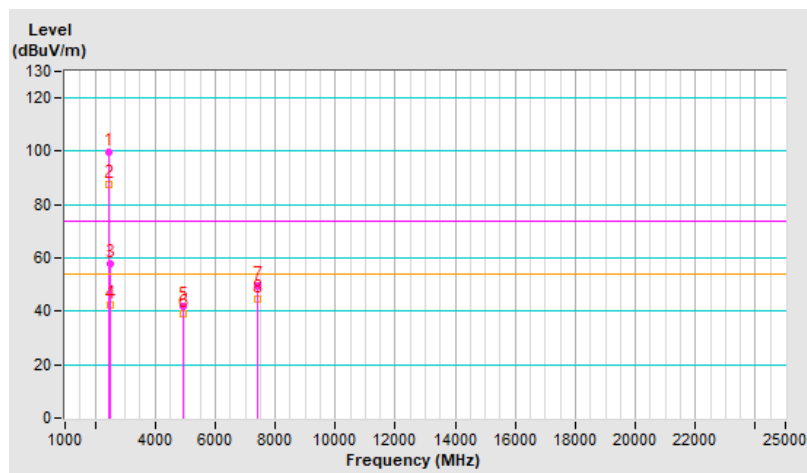


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.5 PK			1.66 V	330	113.9	-3.4
2	*2467.00	98.6 AV			1.66 V	330	102.0	-3.4
3	2483.50	67.5 PK	74.0	-6.5	1.66 V	330	70.9	-3.4
4	2483.50	47.9 AV	54.0	-6.1	1.66 V	330	51.3	-3.4
5	4934.00	42.0 PK	74.0	-32.0	1.41 V	345	40.4	1.6
6	4934.00	38.7 AV	54.0	-15.3	1.41 V	345	37.1	1.6
7	7401.00	48.6 PK	74.0	-25.4	1.24 V	338	40.7	7.9
8	7401.00	43.9 AV	54.0	-10.1	1.24 V	338	36.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

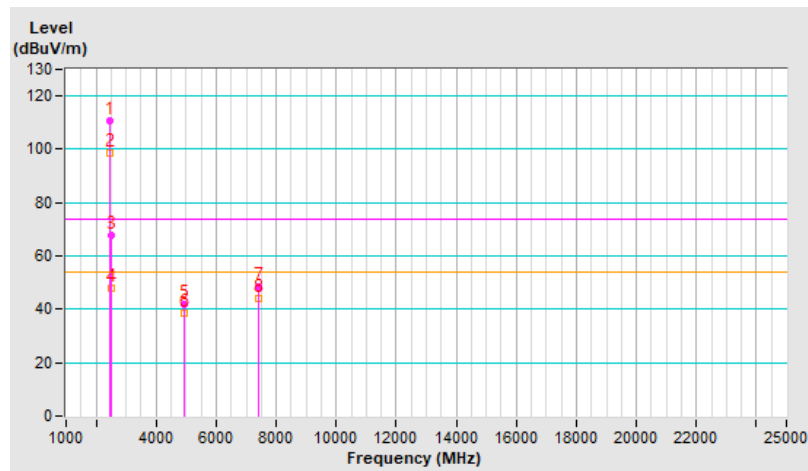


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.5 PK			2.23 H	116	102.9	-3.4
2	*2472.00	86.5 AV			2.23 H	116	89.9	-3.4
3	2483.50	59.3 PK	74.0	-14.7	2.23 H	116	62.7	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.23 H	116	45.7	-3.4
5	4944.00	41.8 PK	74.0	-32.2	1.38 H	360	40.2	1.6
6	4944.00	39.1 AV	54.0	-14.9	1.38 H	360	37.5	1.6
7	7416.00	48.8 PK	74.0	-25.2	1.44 H	360	41.0	7.8
8	7416.00	44.0 AV	54.0	-10.0	1.44 H	360	36.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

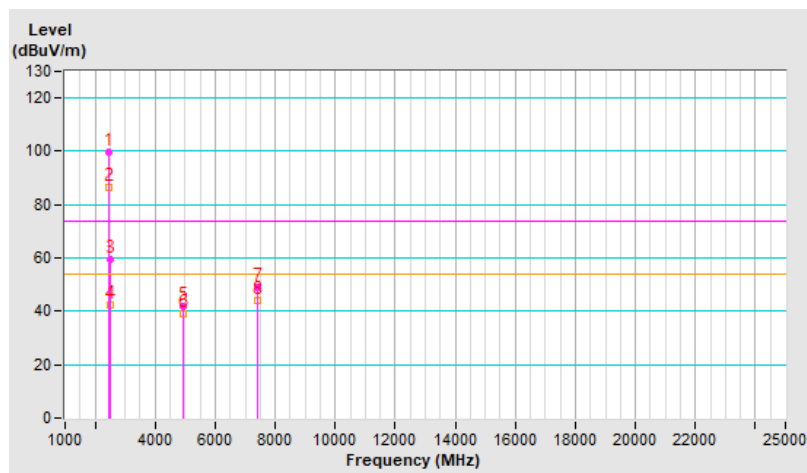


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.3 PK			1.74 V	320	113.7	-3.4
2	*2472.00	98.1 AV			1.74 V	320	101.5	-3.4
3	2483.50	63.5 PK	74.0	-10.5	1.74 V	320	66.9	-3.4
4	2483.50	48.6 AV	54.0	-5.4	1.74 V	320	52.0	-3.4
5	4944.00	42.3 PK	74.0	-31.7	1.50 V	360	40.7	1.6
6	4944.00	39.0 AV	54.0	-15.0	1.50 V	360	37.4	1.6
7	7416.00	48.4 PK	74.0	-25.6	1.23 V	337	40.6	7.8
8	7416.00	43.8 AV	54.0	-10.2	1.23 V	337	36.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

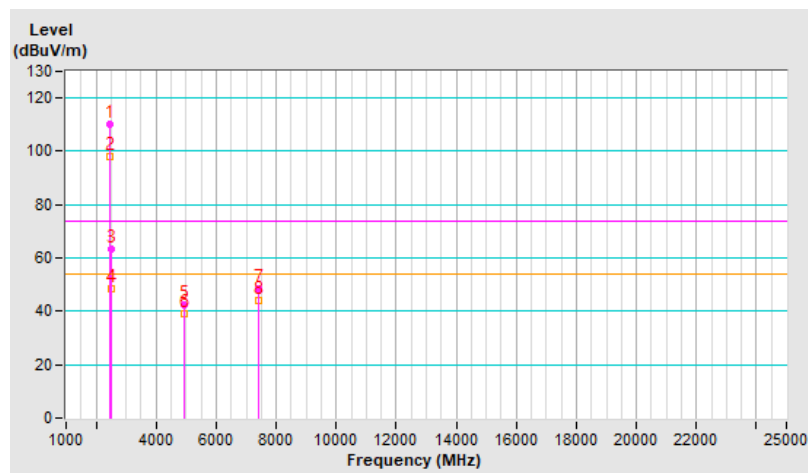


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	2.15 H	115	59.2	-3.6
2	2390.00	41.9 AV	54.0	-12.1	2.15 H	115	45.5	-3.6
3	*2422.00	97.2 PK			2.15 H	115	100.7	-3.5
4	*2422.00	85.6 AV			2.15 H	115	89.1	-3.5
5	4844.00	41.5 PK	74.0	-32.5	1.48 H	338	39.9	1.6
6	4844.00	39.0 AV	54.0	-15.0	1.48 H	338	37.4	1.6
7	7266.00	48.9 PK	74.0	-25.1	1.32 H	360	41.6	7.3
8	7266.00	44.2 AV	54.0	-9.8	1.32 H	360	36.9	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

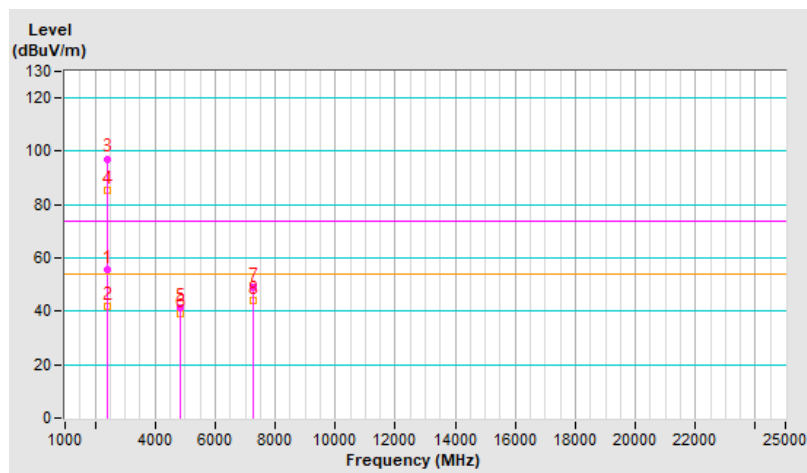


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	1.70 V	321	68.5	-3.6
2	2390.00	45.2 AV	54.0	-8.8	1.70 V	321	48.8	-3.6
3	*2422.00	111.2 PK			1.70 V	321	114.7	-3.5
4	*2422.00	96.5 AV			1.70 V	321	100.0	-3.5
5	4844.00	41.3 PK	74.0	-32.7	1.49 V	339	39.7	1.6
6	4844.00	38.5 AV	54.0	-15.5	1.49 V	339	36.9	1.6
7	7266.00	48.7 PK	74.0	-25.3	1.14 V	320	41.4	7.3
8	7266.00	44.2 AV	54.0	-9.8	1.14 V	320	36.9	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

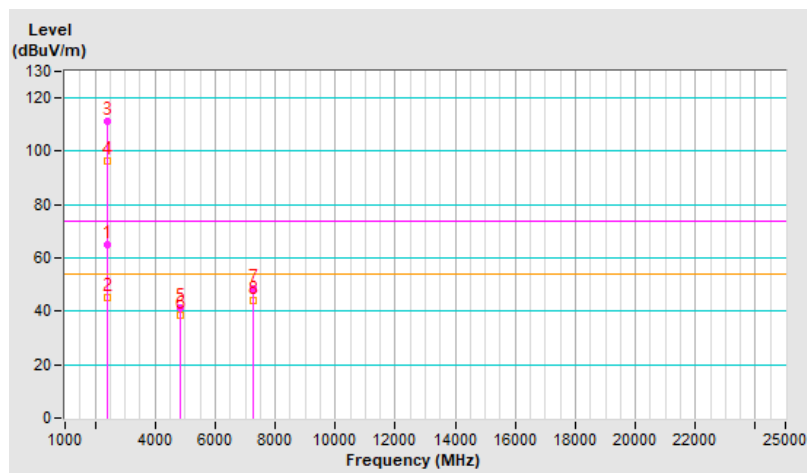


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	2.23 H	104	59.0	-3.6
2	2390.00	42.1 AV	54.0	-11.9	2.23 H	104	45.7	-3.6
3	*2437.00	102.3 PK			2.23 H	104	105.8	-3.5
4	*2437.00	90.1 AV			2.23 H	104	93.6	-3.5
5	2483.50	54.3 PK	74.0	-19.7	2.23 H	104	57.7	-3.4
6	2483.50	43.1 AV	54.0	-10.9	2.23 H	104	46.5	-3.4
7	4874.00	41.7 PK	74.0	-32.3	1.43 H	360	40.2	1.5
8	4874.00	38.9 AV	54.0	-15.1	1.43 H	360	37.4	1.5
9	7311.00	49.7 PK	74.0	-24.3	1.42 H	360	42.1	7.6
10	7311.00	44.8 AV	54.0	-9.2	1.42 H	360	37.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

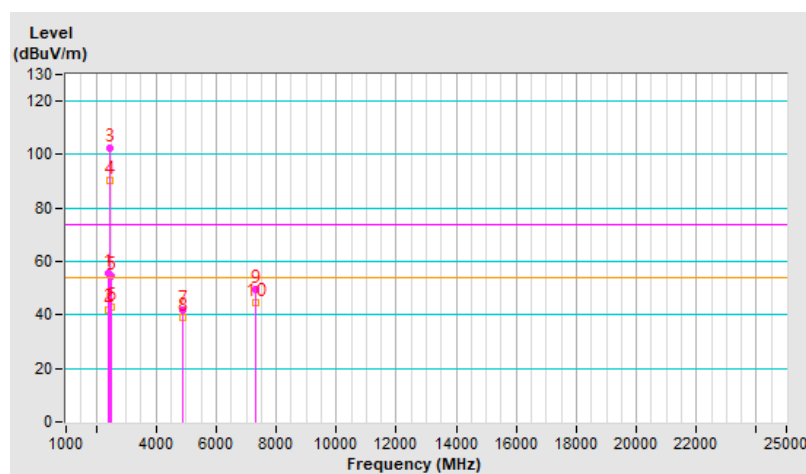


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	1.73 V	312	67.7	-3.6
2	2390.00	53.2 AV	54.0	-0.8	1.73 V	312	56.8	-3.6
3	*2437.00	114.2 PK			1.73 V	312	117.7	-3.5
4	*2437.00	98.6 AV			1.73 V	312	102.1	-3.5
5	2483.50	63.5 PK	74.0	-10.5	1.73 V	312	66.9	-3.4
6	2483.50	51.5 AV	54.0	-2.5	1.73 V	312	54.9	-3.4
7	4874.00	41.4 PK	74.0	-32.6	1.49 V	358	39.9	1.5
8	4874.00	38.7 AV	54.0	-15.3	1.49 V	358	37.2	1.5
9	7311.00	48.1 PK	74.0	-25.9	1.13 V	334	40.5	7.6
10	7311.00	44.0 AV	54.0	-10.0	1.13 V	334	36.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

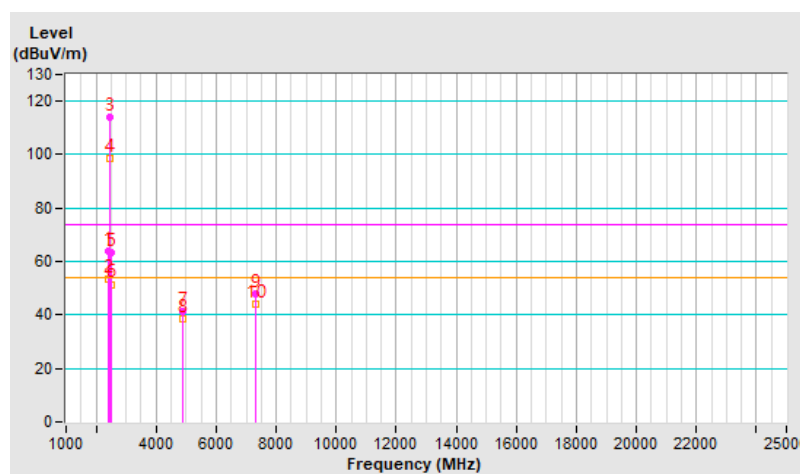


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	98.6 PK			2.16 H	126	102.0	-3.4
2	*2452.00	85.1 AV			2.16 H	126	88.5	-3.4
3	2483.50	58.4 PK	74.0	-15.6	2.16 H	126	61.8	-3.4
4	2483.50	42.5 AV	54.0	-11.5	2.16 H	126	45.9	-3.4
5	4904.00	41.5 PK	74.0	-32.5	1.45 H	339	40.0	1.5
6	4904.00	39.0 AV	54.0	-15.0	1.45 H	339	37.5	1.5
7	7356.00	50.0 PK	74.0	-24.0	1.32 H	360	42.1	7.9
8	7356.00	44.9 AV	54.0	-9.1	1.32 H	360	37.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

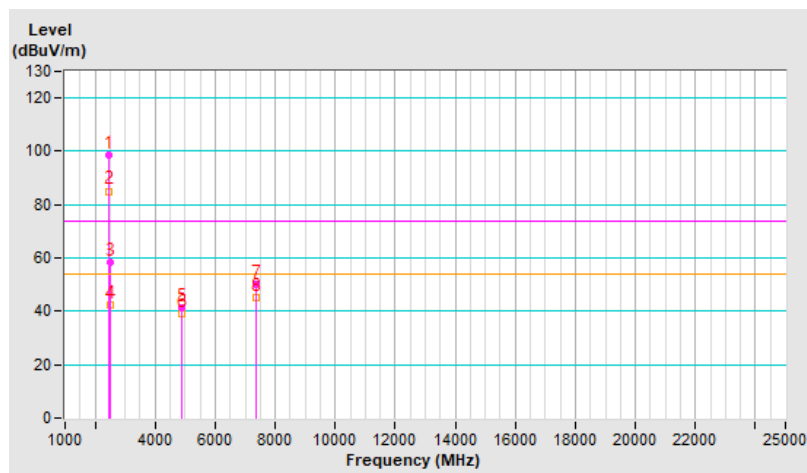


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	110.6 PK			1.75 V	328	114.0	-3.4
2	*2452.00	96.3 AV			1.75 V	328	99.7	-3.4
3	2483.50	65.3 PK	74.0	-8.7	1.75 V	328	68.7	-3.4
4	2483.50	50.6 AV	54.0	-3.4	1.75 V	328	54.0	-3.4
5	4904.00	40.8 PK	74.0	-33.2	1.50 V	333	39.3	1.5
6	4904.00	38.1 AV	54.0	-15.9	1.50 V	333	36.6	1.5
7	7356.00	48.3 PK	74.0	-25.7	1.20 V	346	40.4	7.9
8	7356.00	44.0 AV	54.0	-10.0	1.20 V	346	36.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

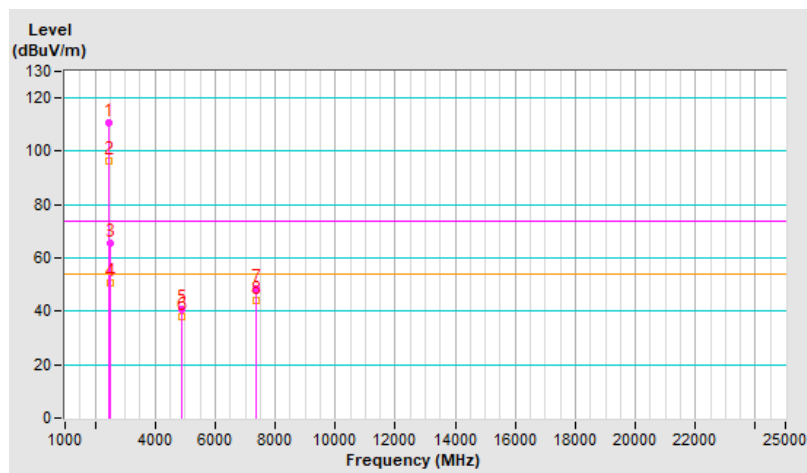


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	97.1 PK			2.19 H	131	100.5	-3.4
2	*2457.00	84.2 AV			2.19 H	131	87.6	-3.4
3	2483.50	54.3 PK	74.0	-19.7	2.19 H	131	57.7	-3.4
4	2483.50	42.1 AV	54.0	-11.9	2.19 H	131	45.5	-3.4
5	4914.00	42.3 PK	74.0	-31.7	1.40 H	340	40.8	1.5
6	4914.00	39.4 AV	54.0	-14.6	1.40 H	340	37.9	1.5
7	7371.00	49.6 PK	74.0	-24.4	1.33 H	348	41.8	7.8
8	7371.00	44.9 AV	54.0	-9.1	1.33 H	348	37.1	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

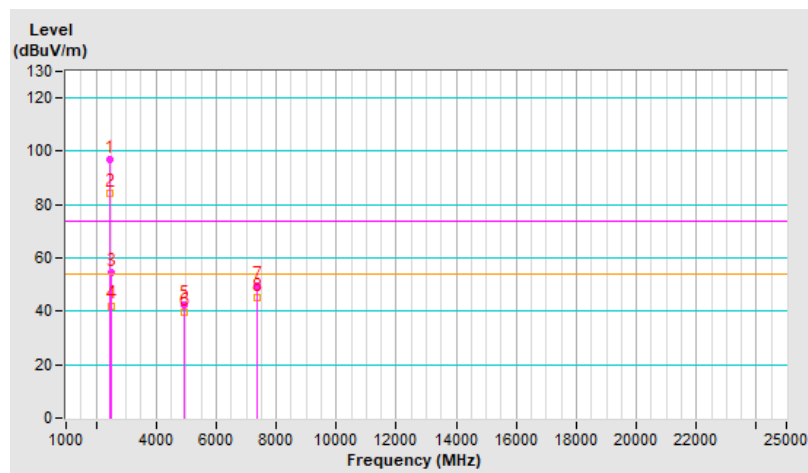


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.5 PK			1.73 V	338	111.9	-3.4
2	*2457.00	96.5 AV			1.73 V	338	99.9	-3.4
3	2483.50	58.3 PK	74.0	-15.7	1.73 V	338	61.7	-3.4
4	2483.50	47.8 AV	54.0	-6.2	1.73 V	338	51.2	-3.4
5	4914.00	42.0 PK	74.0	-32.0	1.43 V	333	40.5	1.5
6	4914.00	39.0 AV	54.0	-15.0	1.43 V	333	37.5	1.5
7	7371.00	48.5 PK	74.0	-25.5	1.16 V	348	40.7	7.8
8	7371.00	44.1 AV	54.0	-9.9	1.16 V	348	36.3	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

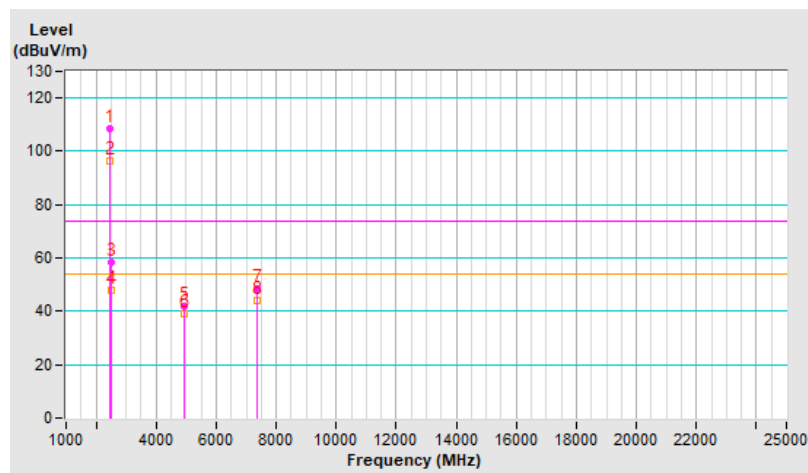


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.1 PK			2.17 H	131	100.6	-3.5
2	*2462.00	84.1 AV			2.17 H	131	87.6	-3.5
3	2483.50	55.1 PK	74.0	-18.9	2.17 H	131	58.5	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.17 H	131	45.7	-3.4
5	4924.00	42.1 PK	74.0	-31.9	1.36 H	339	40.5	1.6
6	4924.00	39.3 AV	54.0	-14.7	1.36 H	339	37.7	1.6
7	7386.00	49.9 PK	74.0	-24.1	1.44 H	345	42.0	7.9
8	7386.00	44.9 AV	54.0	-9.1	1.44 H	345	37.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

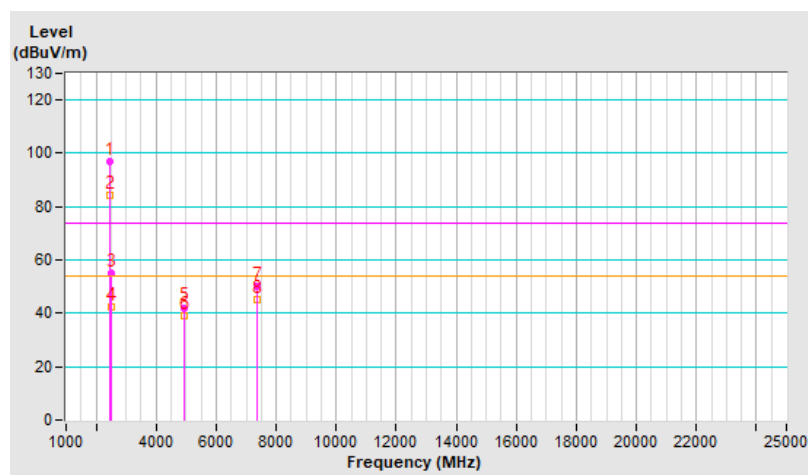


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.2 PK			1.68 V	322	112.7	-3.5
2	*2462.00	96.4 AV			1.68 V	322	99.9	-3.5
3	2483.50	68.3 PK	74.0	-5.7	1.68 V	322	71.7	-3.4
4	2483.50	49.3 AV	54.0	-4.7	1.68 V	322	52.7	-3.4
5	4924.00	41.9 PK	74.0	-32.1	1.48 V	340	40.3	1.6
6	4924.00	38.9 AV	54.0	-15.1	1.48 V	340	37.3	1.6
7	7386.00	48.1 PK	74.0	-25.9	1.21 V	323	40.2	7.9
8	7386.00	43.8 AV	54.0	-10.2	1.21 V	323	35.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

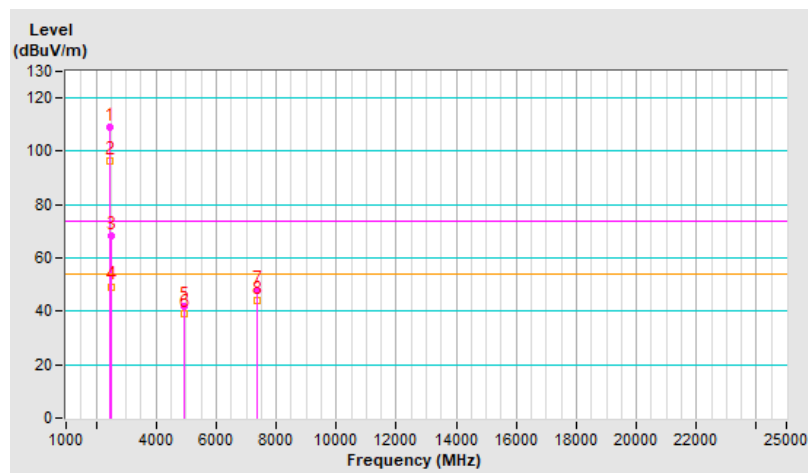


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	2.23 H	114	58.9	-3.6
2	2390.00	41.8 AV	54.0	-12.2	2.23 H	114	45.4	-3.6
3	*2412.00	111.2 PK			2.23 H	114	114.7	-3.5
4	*2412.00	98.6 AV			2.23 H	114	102.1	-3.5
5	4824.00	41.6 PK	74.0	-32.4	1.28 H	24	39.9	1.7
6	4824.00	30.4 AV	54.0	-23.6	1.28 H	24	28.7	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

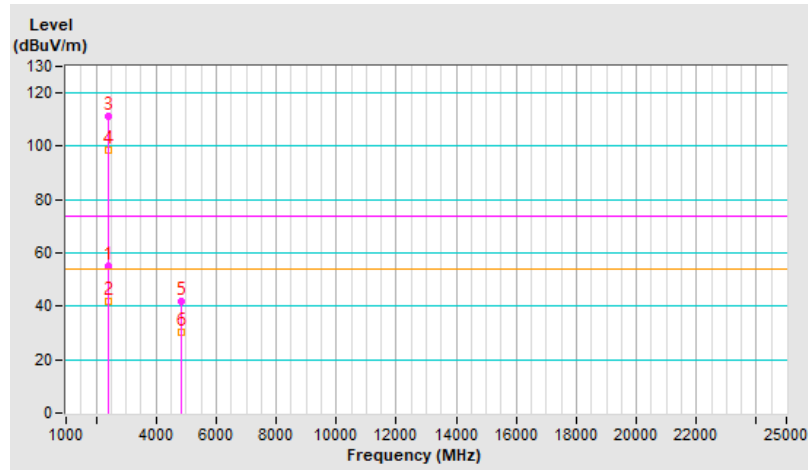


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.67 V	333	70.8	-3.6
2	2390.00	45.3 AV	54.0	-8.7	1.67 V	333	48.9	-3.6
3	*2412.00	118.8 PK			1.67 V	333	122.3	-3.5
4	*2412.00	106.2 AV			1.67 V	333	109.7	-3.5
5	4824.00	43.7 PK	74.0	-30.3	1.12 V	15	42.0	1.7
6	4824.00	29.7 AV	54.0	-24.3	1.12 V	15	28.0	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

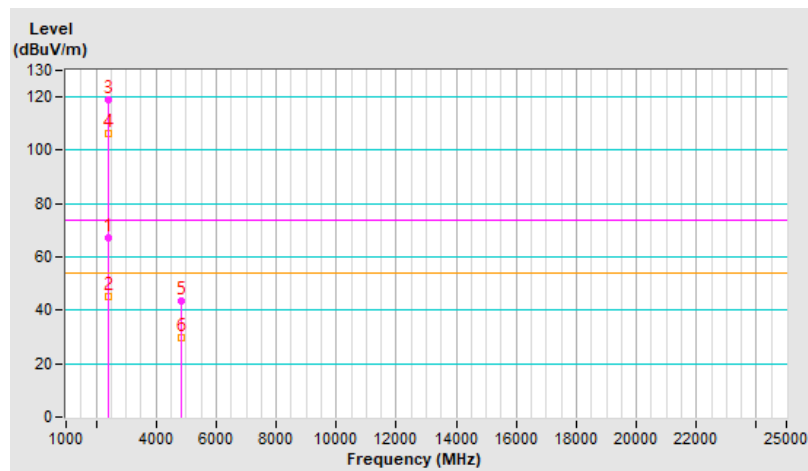


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	2.20 H	129	59.0	-3.6
2	2390.00	42.3 AV	54.0	-11.7	2.20 H	129	45.9	-3.6
3	*2437.00	114.3 PK			2.20 H	129	117.8	-3.5
4	*2437.00	111.2 AV			2.20 H	129	114.7	-3.5
5	2483.50	56.1 PK	74.0	-17.9	2.20 H	129	59.5	-3.4
6	2483.50	43.1 AV	54.0	-10.9	2.20 H	129	46.5	-3.4
7	4874.00	41.3 PK	74.0	-32.7	1.29 H	17	39.8	1.5
8	4874.00	30.2 AV	54.0	-23.8	1.29 H	17	28.7	1.5
9	7311.00	55.6 PK	74.0	-18.4	1.21 H	39	48.0	7.6
10	7311.00	38.5 AV	54.0	-15.5	1.21 H	39	30.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

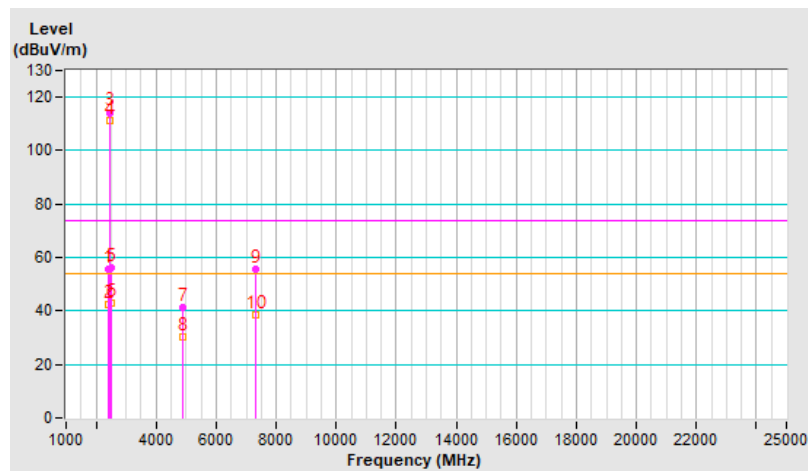


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.69 V	319	66.1	-3.6
2	2390.00	44.2 AV	54.0	-9.8	1.69 V	319	47.8	-3.6
3	*2437.00	122.5 PK			1.69 V	319	126.0	-3.5
4	*2437.00	110.3 AV			1.69 V	319	113.8	-3.5
5	2483.50	66.3 PK	74.0	-7.7	1.69 V	319	69.7	-3.4
6	2483.50	43.1 AV	54.0	-10.9	1.69 V	319	46.5	-3.4
7	4874.00	43.6 PK	74.0	-30.4	1.15 V	11	42.1	1.5
8	4874.00	29.7 AV	54.0	-24.3	1.15 V	11	28.2	1.5
9	7311.00	55.9 PK	74.0	-18.1	1.75 V	160	48.3	7.6
10	7311.00	41.9 AV	54.0	-12.1	1.75 V	160	34.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

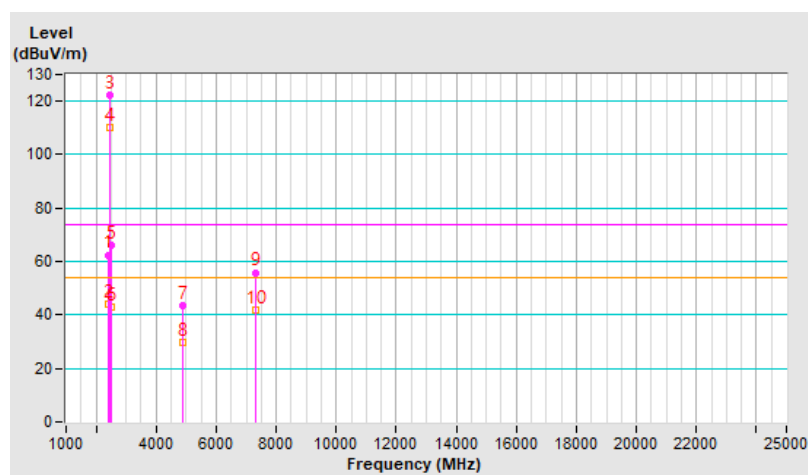


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.8 PK			2.17 H	102	113.3	-3.5
2	*2462.00	97.1 AV			2.17 H	102	100.6	-3.5
3	2483.50	59.5 PK	74.0	-14.5	2.17 H	102	62.9	-3.4
4	2483.50	41.8 AV	54.0	-12.2	2.17 H	102	45.2	-3.4
5	4924.00	41.1 PK	74.0	-32.9	1.36 H	19	39.5	1.6
6	4924.00	30.1 AV	54.0	-23.9	1.36 H	19	28.5	1.6
7	7386.00	55.4 PK	74.0	-18.6	1.14 H	30	47.5	7.9
8	7386.00	38.5 AV	54.0	-15.5	1.14 H	30	30.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

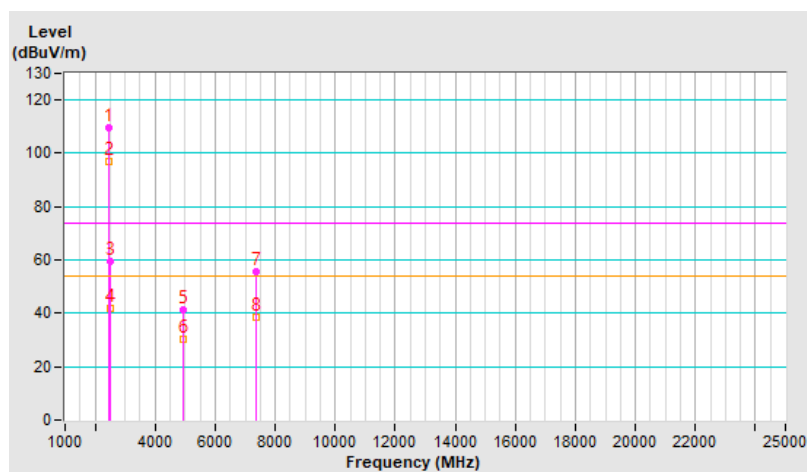


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.7 PK			1.68 V	336	122.2	-3.5
2	*2462.00	107.1 AV			1.68 V	336	110.6	-3.5
3	2483.50	57.6 PK	74.0	-16.4	1.68 V	336	61.0	-3.4
4	2483.50	43.2 AV	54.0	-10.8	1.68 V	336	46.6	-3.4
5	4924.00	43.5 PK	74.0	-30.5	1.13 V	31	41.9	1.6
6	4924.00	29.4 AV	54.0	-24.6	1.13 V	31	27.8	1.6
7	7386.00	56.3 PK	74.0	-17.7	1.79 V	163	48.4	7.9
8	7386.00	42.2 AV	54.0	-11.8	1.79 V	163	34.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

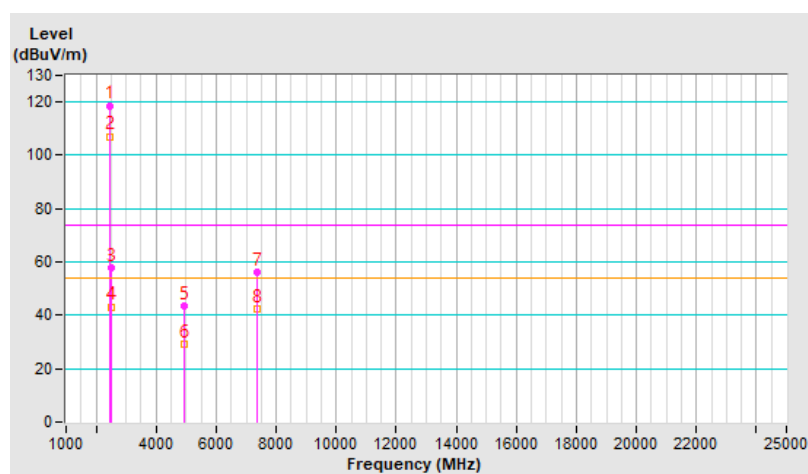


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.1 PK			2.14 H	111	113.5	-3.4
2	*2467.00	97.7 AV			2.14 H	111	101.1	-3.4
3	2483.50	57.5 PK	74.0	-16.5	2.14 H	111	60.9	-3.4
4	2483.50	41.9 AV	54.0	-12.1	2.14 H	111	45.3	-3.4
5	4934.00	40.9 PK	74.0	-33.1	1.35 H	15	39.3	1.6
6	4934.00	29.9 AV	54.0	-24.1	1.35 H	15	28.3	1.6
7	7401.00	55.2 PK	74.0	-18.8	1.23 H	44	47.3	7.9
8	7401.00	38.2 AV	54.0	-15.8	1.23 H	44	30.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

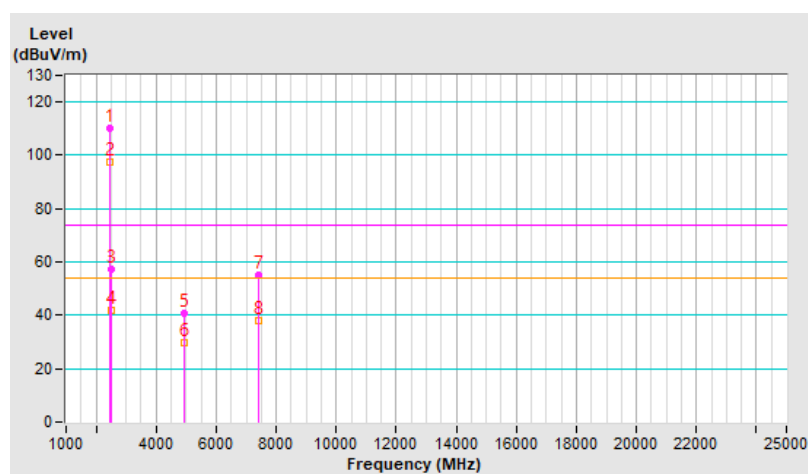


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	118.9 PK			1.65 V	327	122.3	-3.4
2	*2467.00	107.6 AV			1.65 V	327	111.0	-3.4
3	2483.50	58.4 PK	74.0	-15.6	1.65 V	327	61.8	-3.4
4	2483.50	44.5 AV	54.0	-9.5	1.65 V	327	47.9	-3.4
5	4934.00	43.5 PK	74.0	-30.5	1.11 V	8	41.9	1.6
6	4934.00	29.3 AV	54.0	-24.7	1.11 V	8	27.7	1.6
7	7401.00	56.2 PK	74.0	-17.8	1.70 V	161	48.3	7.9
8	7401.00	42.1 AV	54.0	-11.9	1.70 V	161	34.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

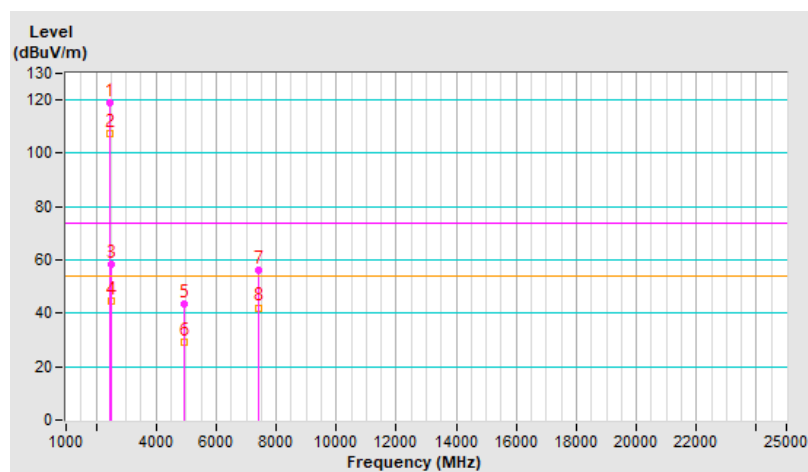


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	103.5 PK			2.14 H	116	106.9	-3.4
2	*2472.00	90.4 AV			2.14 H	116	93.8	-3.4
3	2483.50	57.6 PK	74.0	-16.4	2.14 H	116	61.0	-3.4
4	2483.50	41.3 AV	54.0	-12.7	2.14 H	116	44.7	-3.4
5	4944.00	41.2 PK	74.0	-32.8	1.33 H	11	39.6	1.6
6	4944.00	29.8 AV	54.0	-24.2	1.33 H	11	28.2	1.6
7	7416.00	55.7 PK	74.0	-18.3	1.19 H	59	47.9	7.8
8	7416.00	38.6 AV	54.0	-15.4	1.19 H	59	30.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

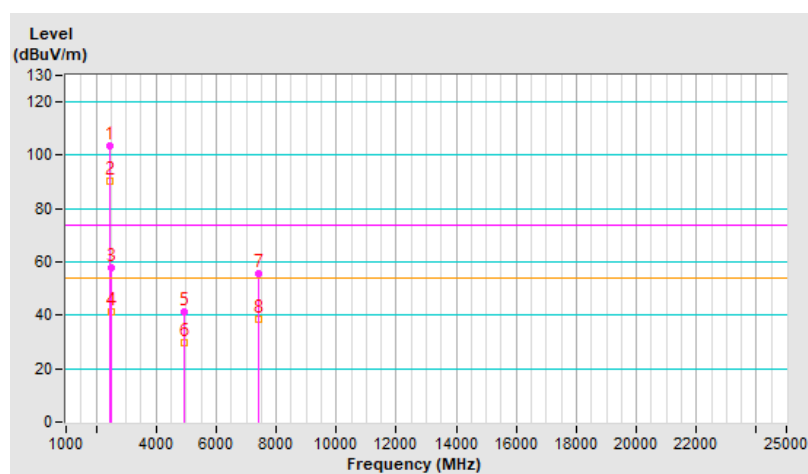


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	115.2 PK			1.76 V	315	118.6	-3.4
2	*2472.00	103.4 AV			1.76 V	315	106.8	-3.4
3	2483.50	61.0 PK	74.0	-13.0	1.76 V	315	64.4	-3.4
4	2483.50	43.5 AV	54.0	-10.5	1.76 V	315	46.9	-3.4
5	4944.00	43.5 PK	74.0	-30.5	1.13 V	22	41.9	1.6
6	4944.00	29.8 AV	54.0	-24.2	1.13 V	22	28.2	1.6
7	7416.00	55.8 PK	74.0	-18.2	1.71 V	164	48.0	7.8
8	7416.00	41.6 AV	54.0	-12.4	1.71 V	164	33.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

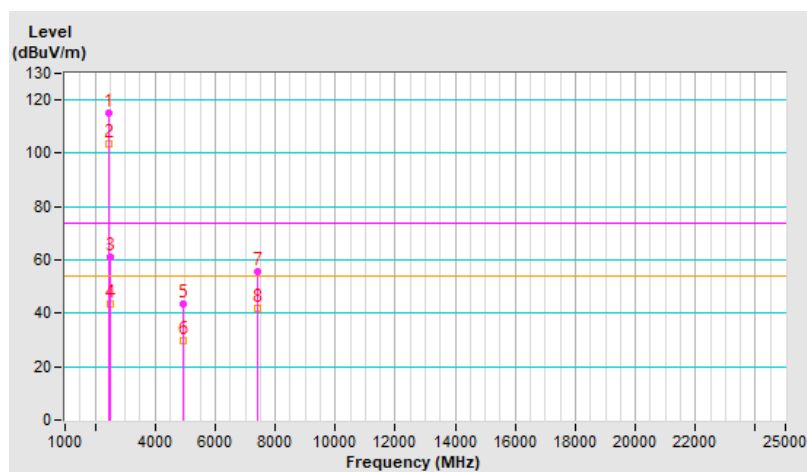


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.2 PK	74.0	-19.8	2.26 H	104	57.8	-3.6
2	2390.00	41.5 AV	54.0	-12.5	2.26 H	104	45.1	-3.6
3	*2412.00	104.9 PK			2.26 H	104	108.4	-3.5
4	*2412.00	91.1 AV			2.26 H	104	94.6	-3.5
5	4824.00	41.6 PK	74.0	-32.4	1.28 H	30	39.9	1.7
6	4824.00	30.5 AV	54.0	-23.5	1.28 H	30	28.8	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

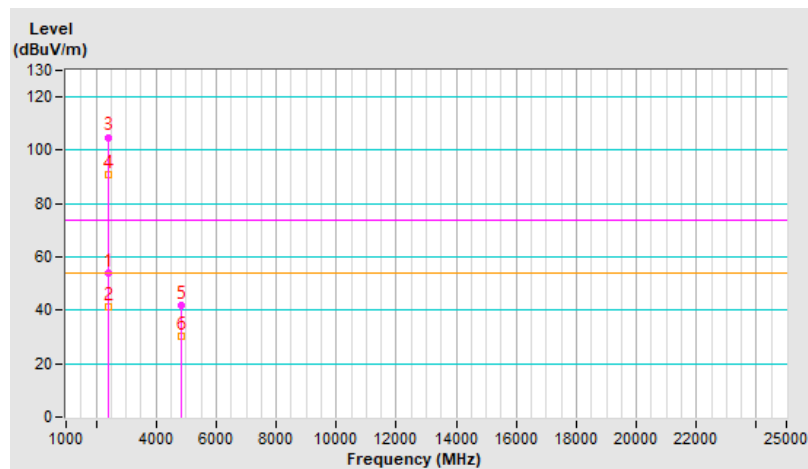


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.5 PK	74.0	-14.5	1.77 V	328	63.1	-3.6
2	2390.00	44.1 AV	54.0	-9.9	1.77 V	328	47.7	-3.6
3	*2412.00	116.5 PK			1.77 V	328	120.0	-3.5
4	*2412.00	104.4 AV			1.77 V	328	107.9	-3.5
5	4824.00	43.3 PK	74.0	-30.7	1.10 V	32	41.6	1.7
6	4824.00	29.7 AV	54.0	-24.3	1.10 V	32	28.0	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

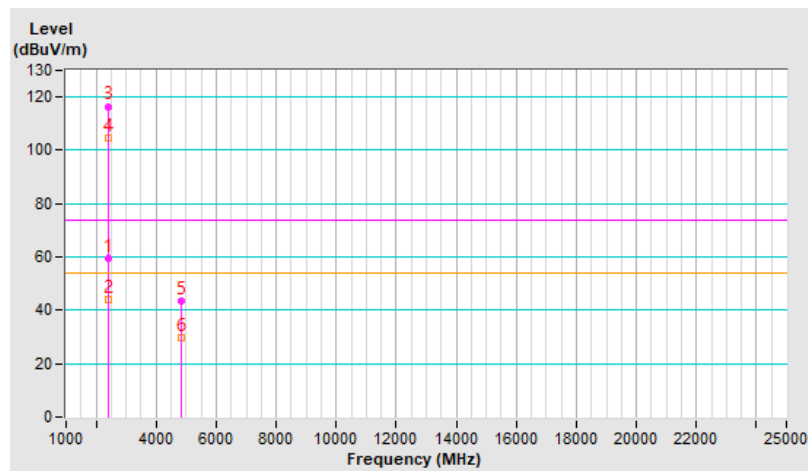


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.2 PK	74.0	-13.8	2.17 H	127	63.8	-3.6
2	2390.00	42.1 AV	54.0	-11.9	2.17 H	127	45.7	-3.6
3	*2437.00	108.5 PK			2.17 H	127	112.0	-3.5
4	*2437.00	95.2 AV			2.17 H	127	98.7	-3.5
5	2483.50	55.3 PK	74.0	-18.7	2.17 H	127	58.7	-3.4
6	2483.50	42.5 AV	54.0	-11.5	2.17 H	127	45.9	-3.4
7	4874.00	41.6 PK	74.0	-32.4	1.27 H	6	40.1	1.5
8	4874.00	30.2 AV	54.0	-23.8	1.27 H	6	28.7	1.5
9	7311.00	55.5 PK	74.0	-18.5	1.12 H	52	47.9	7.6
10	7311.00	38.6 AV	54.0	-15.4	1.12 H	52	31.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

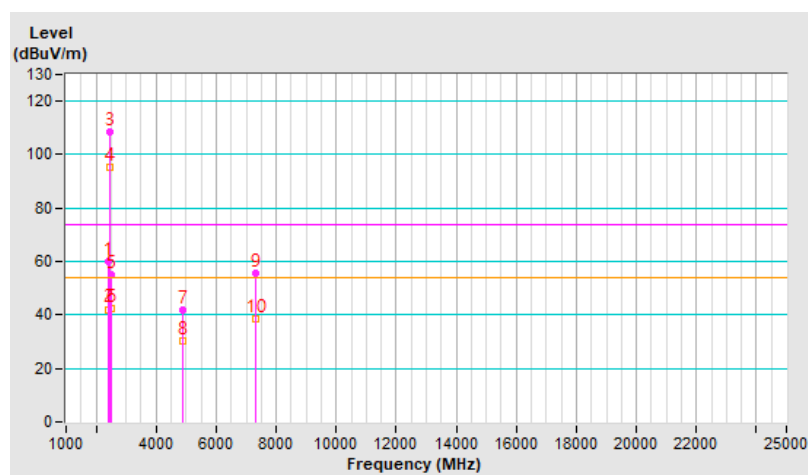


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.2 PK	74.0	-9.8	1.69 V	334	67.8	-3.6
2	2390.00	42.5 AV	54.0	-11.5	1.69 V	334	46.1	-3.6
3	*2437.00	119.2 PK			1.69 V	334	122.7	-3.5
4	*2437.00	107.5 AV			1.69 V	334	111.0	-3.5
5	2483.50	57.1 PK	74.0	-16.9	1.69 V	334	60.5	-3.4
6	2483.50	42.6 AV	54.0	-11.4	1.69 V	334	46.0	-3.4
7	4874.00	43.9 PK	74.0	-30.1	1.07 V	22	42.4	1.5
8	4874.00	29.9 AV	54.0	-24.1	1.07 V	22	28.4	1.5
9	7311.00	55.8 PK	74.0	-18.2	1.70 V	164	48.2	7.6
10	7311.00	41.5 AV	54.0	-12.5	1.70 V	164	33.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

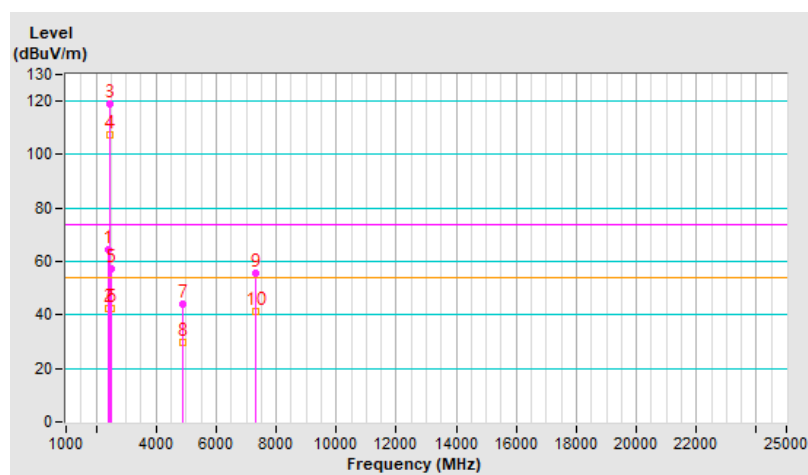


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.5 PK			2.16 H	109	111.0	-3.5
2	*2462.00	95.4 AV			2.16 H	109	98.9	-3.5
3	2483.50	58.3 PK	74.0	-15.7	2.16 H	109	61.7	-3.4
4	2483.50	41.9 AV	54.0	-12.1	2.16 H	109	45.3	-3.4
5	4924.00	41.5 PK	74.0	-32.5	1.33 H	44	39.9	1.6
6	4924.00	30.1 AV	54.0	-23.9	1.33 H	44	28.5	1.6
7	7386.00	58.8 PK	74.0	-15.2	1.26 H	56	50.9	7.9
8	7386.00	40.9 AV	54.0	-13.1	1.26 H	56	33.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

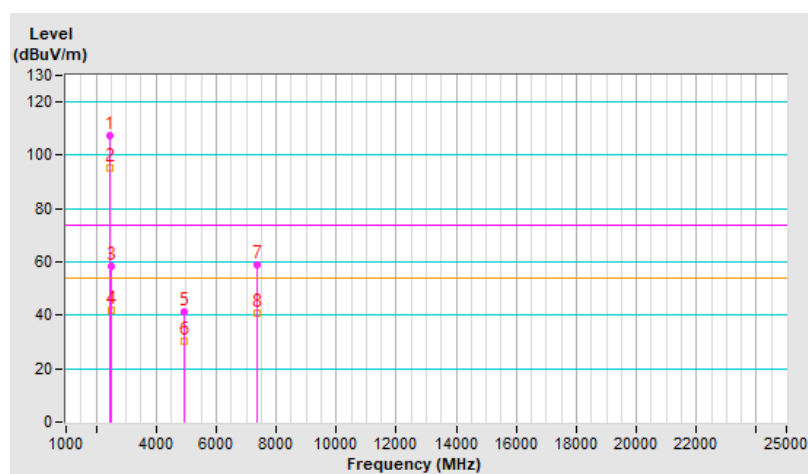


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.6 PK			1.68 V	337	121.1	-3.5
2	*2462.00	105.1 AV			1.68 V	337	108.6	-3.5
3	2483.50	61.5 PK	74.0	-12.5	1.68 V	337	64.9	-3.4
4	2483.50	43.6 AV	54.0	-10.4	1.68 V	337	47.0	-3.4
5	4924.00	43.7 PK	74.0	-30.3	1.10 V	21	42.1	1.6
6	4924.00	29.6 AV	54.0	-24.4	1.10 V	21	28.0	1.6
7	7386.00	56.7 PK	74.0	-17.3	1.72 V	139	48.8	7.9
8	7386.00	42.5 AV	54.0	-11.5	1.72 V	139	34.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

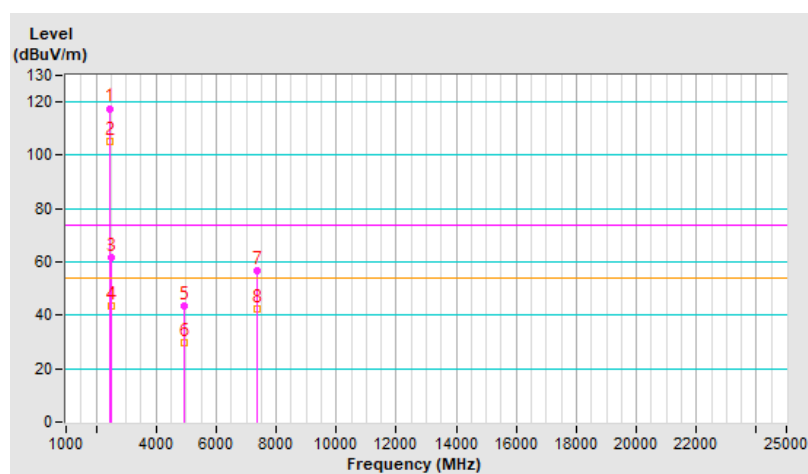


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.8 PK			2.19 H	108	110.2	-3.4
2	*2467.00	95.7 AV			2.19 H	108	99.1	-3.4
3	2483.50	57.5 PK	74.0	-16.5	2.19 H	108	60.9	-3.4
4	2483.50	42.1 AV	54.0	-11.9	2.19 H	108	45.5	-3.4
5	4934.00	42.1 PK	74.0	-31.9	1.27 H	33	40.5	1.6
6	4934.00	30.6 AV	54.0	-23.4	1.27 H	33	29.0	1.6
7	7401.00	59.3 PK	74.0	-14.7	1.24 H	55	51.4	7.9
8	7401.00	41.0 AV	54.0	-13.0	1.24 H	55	33.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

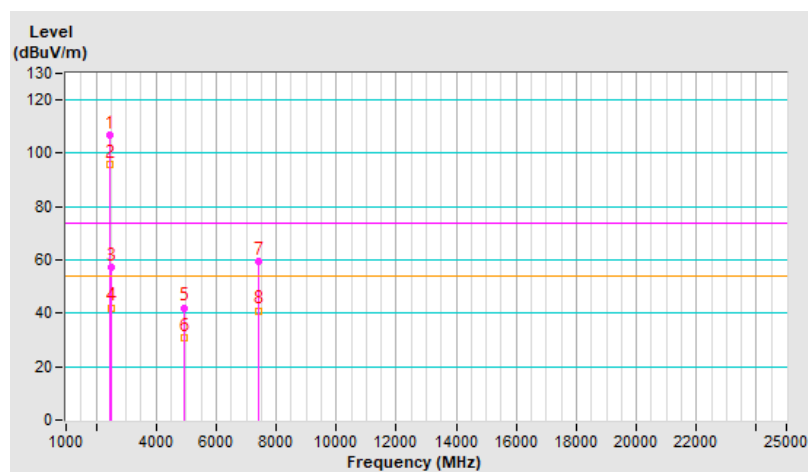


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	118.1 PK			1.73 V	316	121.5	-3.4
2	*2467.00	105.8 AV			1.73 V	316	109.2	-3.4
3	2483.50	66.2 PK	74.0	-7.8	1.73 V	316	69.6	-3.4
4	2483.50	45.3 AV	54.0	-8.7	1.73 V	316	48.7	-3.4
5	4934.00	43.8 PK	74.0	-30.2	1.08 V	17	42.2	1.6
6	4934.00	29.6 AV	54.0	-24.4	1.08 V	17	28.0	1.6
7	7401.00	56.5 PK	74.0	-17.5	1.76 V	142	48.6	7.9
8	7401.00	42.4 AV	54.0	-11.6	1.76 V	142	34.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

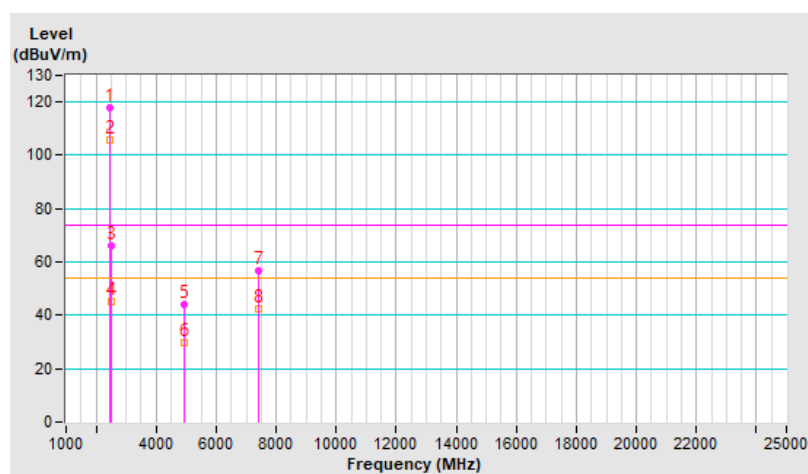


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	103.6 PK			2.20 H	126	107.0	-3.4
2	*2472.00	91.3 AV			2.20 H	126	94.7	-3.4
3	2483.50	56.8 PK	74.0	-17.2	2.20 H	126	60.2	-3.4
4	2483.50	43.5 AV	54.0	-10.5	2.20 H	126	46.9	-3.4
5	4944.00	42.1 PK	74.0	-31.9	1.25 H	23	40.5	1.6
6	4944.00	30.6 AV	54.0	-23.4	1.25 H	23	29.0	1.6
7	7416.00	59.6 PK	74.0	-14.4	1.23 H	44	51.8	7.8
8	7416.00	41.7 AV	54.0	-12.3	1.23 H	44	33.9	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

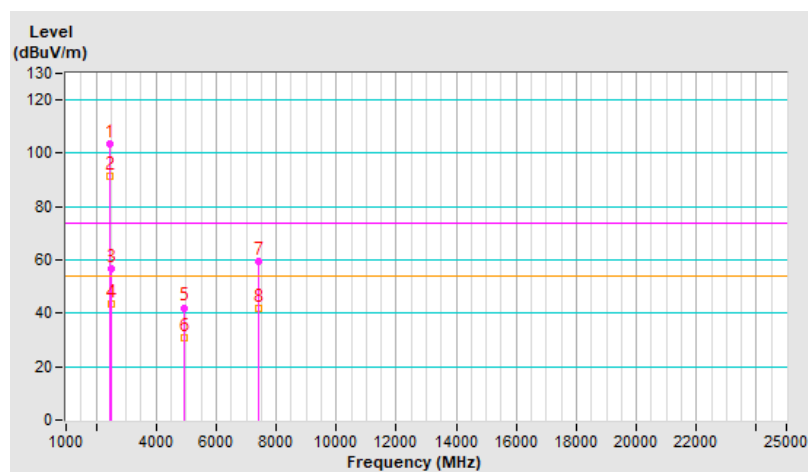


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.0 PK			1.67 V	313	117.4	-3.4
2	*2472.00	102.6 AV			1.67 V	313	106.0	-3.4
3	2483.50	63.5 PK	74.0	-10.5	1.67 V	313	66.9	-3.4
4	2483.50	48.4 AV	54.0	-5.6	1.67 V	313	51.8	-3.4
5	4944.00	43.7 PK	74.0	-30.3	1.14 V	17	42.1	1.6
6	4944.00	29.7 AV	54.0	-24.3	1.14 V	17	28.1	1.6
7	7416.00	56.6 PK	74.0	-17.4	1.74 V	162	48.8	7.8
8	7416.00	42.3 AV	54.0	-11.7	1.74 V	162	34.5	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

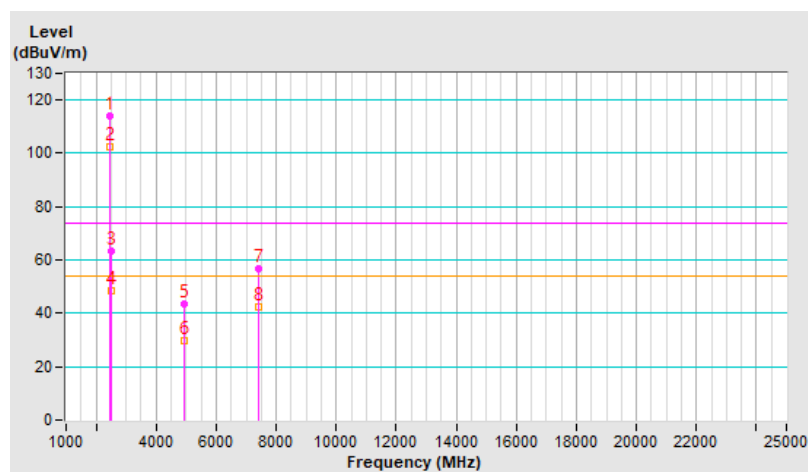


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	2.19 H	128	62.2	-3.6
2	2390.00	42.6 AV	54.0	-11.4	2.19 H	128	46.2	-3.6
3	*2412.00	103.5 PK			2.19 H	128	107.0	-3.5
4	*2412.00	90.3 AV			2.19 H	128	93.8	-3.5
5	4824.00	41.2 PK	74.0	-32.8	1.27 H	10	39.5	1.7
6	4824.00	29.9 AV	54.0	-24.1	1.27 H	10	28.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

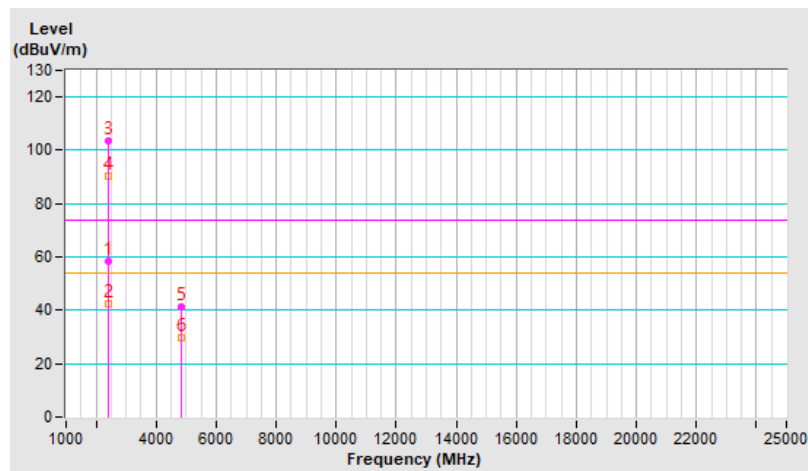


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	1.71 V	328	63.7	-3.6
2	2390.00	44.4 AV	54.0	-9.6	1.71 V	328	48.0	-3.6
3	*2412.00	114.2 PK			1.71 V	328	117.7	-3.5
4	*2412.00	101.6 AV			1.71 V	328	105.1	-3.5
5	4824.00	43.7 PK	74.0	-30.3	1.14 V	13	42.0	1.7
6	4824.00	29.7 AV	54.0	-24.3	1.14 V	13	28.0	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

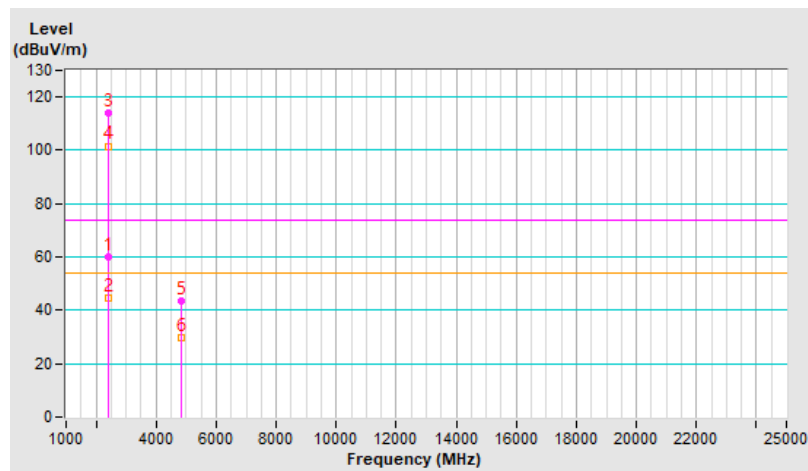


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	2.24 H	118	63.7	-3.6
2	2390.00	42.5 AV	54.0	-11.5	2.24 H	118	46.1	-3.6
3	*2437.00	106.2 PK			2.24 H	118	109.7	-3.5
4	*2437.00	93.5 AV			2.24 H	118	97.0	-3.5
5	2483.50	58.4 PK	74.0	-15.6	2.24 H	118	61.8	-3.4
6	2483.50	43.1 AV	54.0	-10.9	2.24 H	118	46.5	-3.4
7	4874.00	41.7 PK	74.0	-32.3	1.29 H	30	40.2	1.5
8	4874.00	30.5 AV	54.0	-23.5	1.29 H	30	29.0	1.5
9	7311.00	59.5 PK	74.0	-14.5	1.21 H	53	51.9	7.6
10	7311.00	41.3 AV	54.0	-12.7	1.21 H	53	33.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

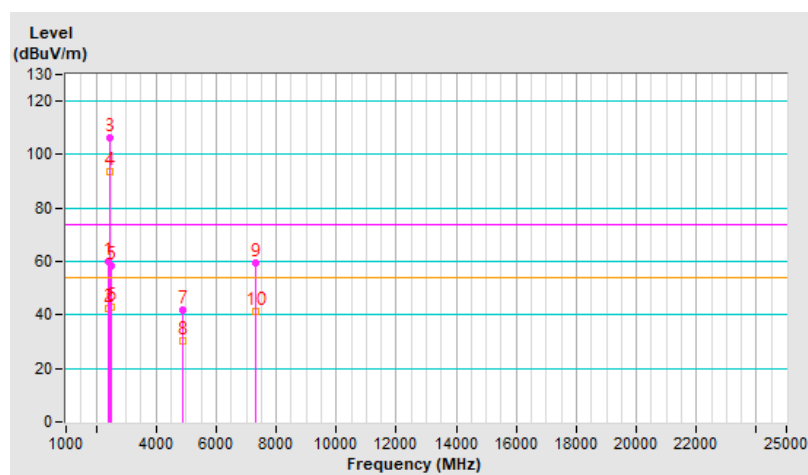


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.69 V	313	70.1	-3.6
2	2390.00	43.2 AV	54.0	-10.8	1.69 V	313	46.8	-3.6
3	*2437.00	117.3 PK			1.69 V	313	120.8	-3.5
4	*2437.00	105.2 AV			1.69 V	313	108.7	-3.5
5	2483.50	60.3 PK	74.0	-13.7	1.69 V	313	63.7	-3.4
6	2483.50	44.5 AV	54.0	-9.5	1.69 V	313	47.9	-3.4
7	4874.00	42.8 PK	74.0	-31.2	1.09 V	17	41.3	1.5
8	4874.00	28.9 AV	54.0	-25.1	1.09 V	17	27.4	1.5
9	7311.00	56.0 PK	74.0	-18.0	1.79 V	162	48.4	7.6
10	7311.00	42.2 AV	54.0	-11.8	1.79 V	162	34.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

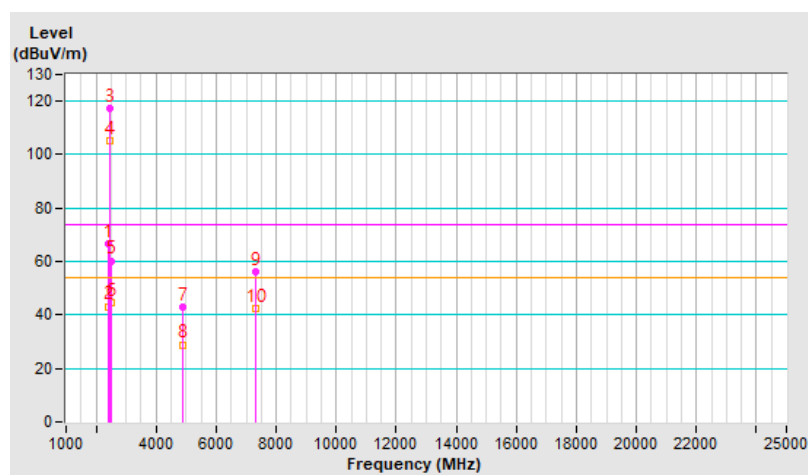


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.3 PK			2.25 H	120	106.8	-3.5
2	*2462.00	89.9 AV			2.25 H	120	93.4	-3.5
3	2483.50	55.1 PK	74.0	-18.9	2.25 H	120	58.5	-3.4
4	2483.50	41.5 AV	54.0	-12.5	2.25 H	120	44.9	-3.4
5	4924.00	41.3 PK	74.0	-32.7	1.31 H	37	39.7	1.6
6	4924.00	29.9 AV	54.0	-24.1	1.31 H	37	28.3	1.6
7	7386.00	59.4 PK	74.0	-14.6	1.27 H	49	51.5	7.9
8	7386.00	41.2 AV	54.0	-12.8	1.27 H	49	33.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

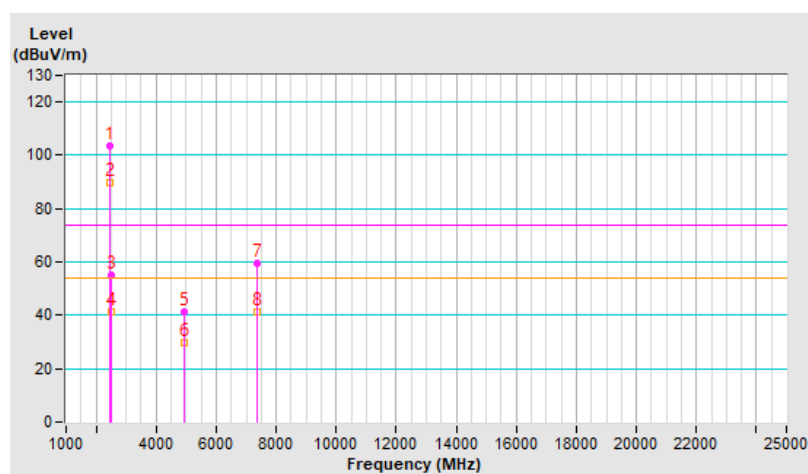


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.1 PK			1.70 V	315	118.6	-3.5
2	*2462.00	102.1 AV			1.70 V	315	105.6	-3.5
3	2483.50	63.6 PK	74.0	-10.4	1.70 V	315	67.0	-3.4
4	2483.50	45.6 AV	54.0	-8.4	1.70 V	315	49.0	-3.4
5	4924.00	43.4 PK	74.0	-30.6	1.11 V	17	41.8	1.6
6	4924.00	29.5 AV	54.0	-24.5	1.11 V	17	27.9	1.6
7	7386.00	56.4 PK	74.0	-17.6	1.75 V	149	48.5	7.9
8	7386.00	42.2 AV	54.0	-11.8	1.75 V	149	34.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

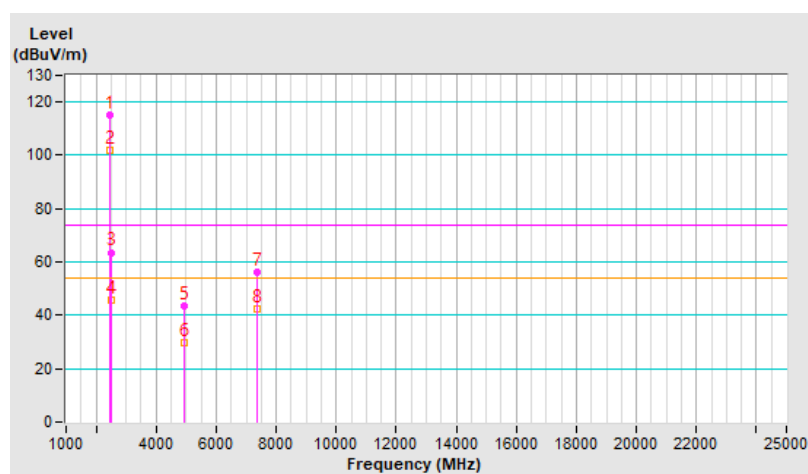


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.1 PK			2.17 H	116	107.5	-3.4
2	*2467.00	92.6 AV			2.17 H	116	96.0	-3.4
3	2483.50	55.6 PK	74.0	-18.4	2.17 H	116	59.0	-3.4
4	2483.50	42.7 AV	54.0	-11.3	2.17 H	116	46.1	-3.4
5	4934.00	41.5 PK	74.0	-32.5	1.32 H	14	39.9	1.6
6	4934.00	30.4 AV	54.0	-23.6	1.32 H	14	28.8	1.6
7	7401.00	59.8 PK	74.0	-14.2	1.27 H	49	51.9	7.9
8	7401.00	41.7 AV	54.0	-12.3	1.27 H	49	33.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

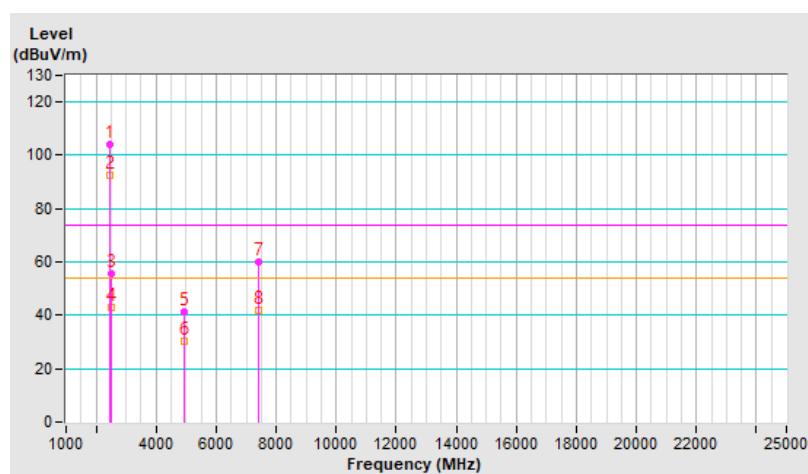


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.2 PK			1.66 V	318	118.6	-3.4
2	*2467.00	101.3 AV			1.66 V	318	104.7	-3.4
3	2483.50	61.3 PK	74.0	-12.7	1.66 V	318	64.7	-3.4
4	2483.50	46.0 AV	54.0	-8.0	1.66 V	318	49.4	-3.4
5	4934.00	43.7 PK	74.0	-30.3	1.14 V	11	42.1	1.6
6	4934.00	29.7 AV	54.0	-24.3	1.14 V	11	28.1	1.6
7	7401.00	55.9 PK	74.0	-18.1	1.75 V	147	48.0	7.9
8	7401.00	41.6 AV	54.0	-12.4	1.75 V	147	33.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

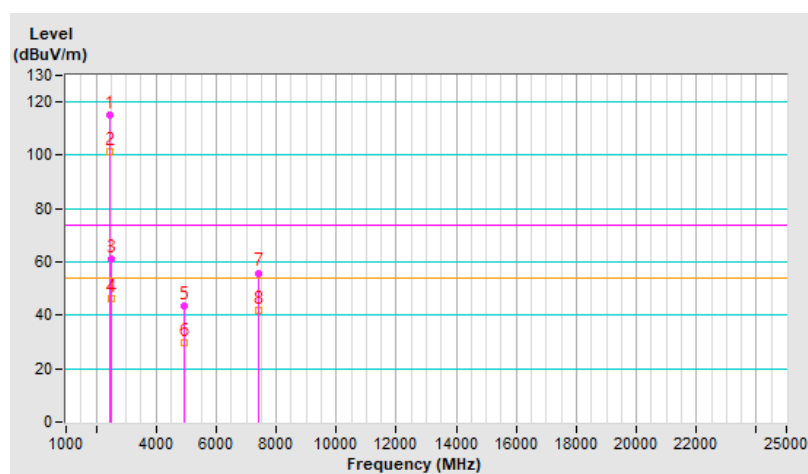


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.6 PK			2.19 H	107	106.0	-3.4
2	*2472.00	91.5 AV			2.19 H	107	94.9	-3.4
3	2483.50	56.6 PK	74.0	-17.4	2.19 H	107	60.0	-3.4
4	2483.50	44.0 AV	54.0	-10.0	2.19 H	107	47.4	-3.4
5	4944.00	41.7 PK	74.0	-32.3	1.27 H	39	40.1	1.6
6	4944.00	30.5 AV	54.0	-23.5	1.27 H	39	28.9	1.6
7	7416.00	59.4 PK	74.0	-14.6	1.29 H	54	51.6	7.8
8	7416.00	41.2 AV	54.0	-12.8	1.29 H	54	33.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

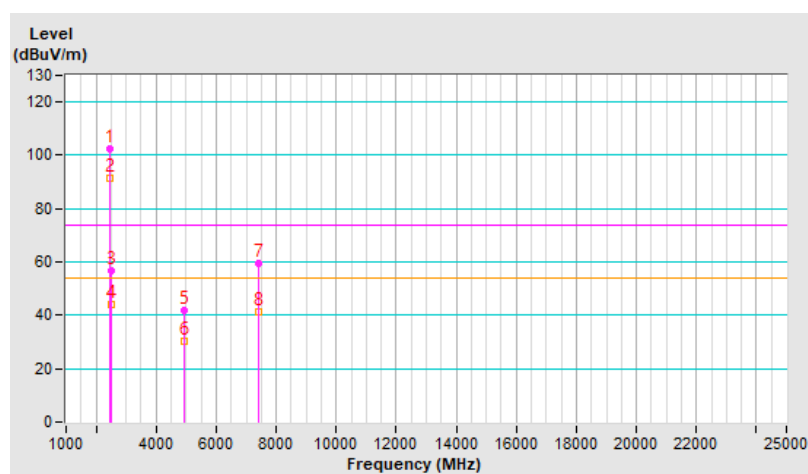


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.7 PK			1.67 V	336	116.1	-3.4
2	*2472.00	100.5 AV			1.67 V	336	103.9	-3.4
3	2483.50	64.0 PK	74.0	-10.0	1.67 V	336	67.4	-3.4
4	2483.50	52.3 AV	54.0	-1.7	1.67 V	336	55.7	-3.4
5	4944.00	43.1 PK	74.0	-30.9	1.13 V	20	41.5	1.6
6	4944.00	29.3 AV	54.0	-24.7	1.13 V	20	27.7	1.6
7	7416.00	56.3 PK	74.0	-17.7	1.78 V	157	48.5	7.8
8	7416.00	42.3 AV	54.0	-11.7	1.78 V	157	34.5	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

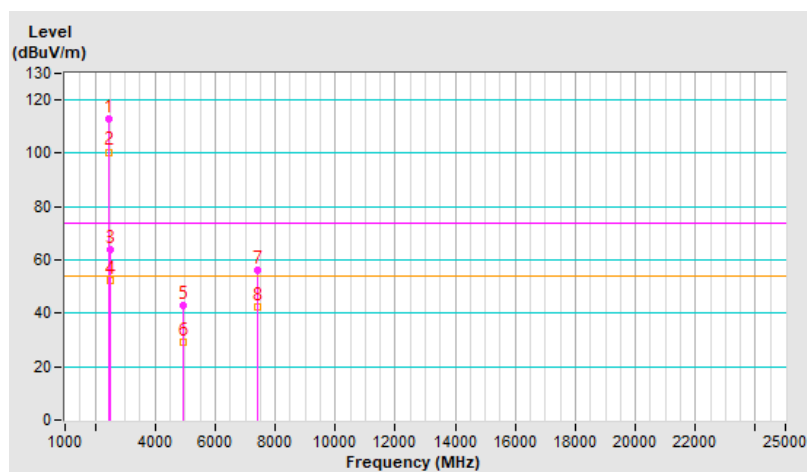


2Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.7 PK	74.0	-18.3	2.88 H	194	59.3	-3.6
2	2390.00	42.3 AV	54.0	-11.7	2.88 H	194	45.9	-3.6
3	*2412.00	99.5 PK			2.88 H	194	103.0	-3.5
4	*2412.00	97.5 AV			2.88 H	194	101.0	-3.5
5	4824.00	47.2 PK	74.0	-26.8	1.07 H	167	45.5	1.7
6	4824.00	45.5 AV	54.0	-8.5	1.07 H	167	43.8	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

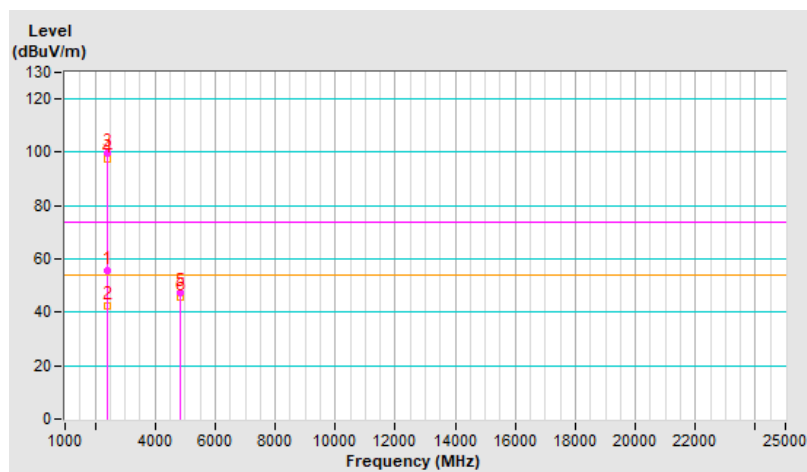


RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.29 V	297	60.5	-3.6
2	2390.00	46.5 AV	54.0	-7.5	1.29 V	297	50.1	-3.6
3	*2412.00	108.5 PK			1.29 V	297	112.0	-3.5
4	*2412.00	106.7 AV			1.29 V	297	110.2	-3.5
5	4824.00	45.5 PK	74.0	-28.5	1.00 V	192	43.8	1.7
6	4824.00	43.3 AV	54.0	-10.7	1.00 V	192	41.6	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

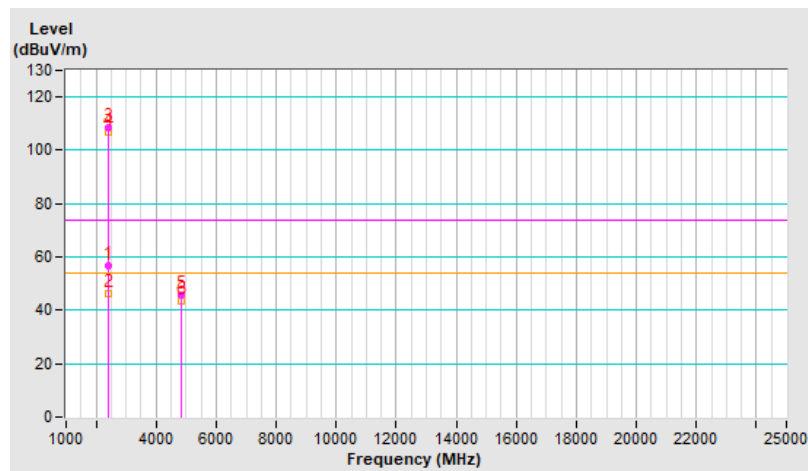


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.6 PK	74.0	-20.4	2.83 H	195	57.2	-3.6
2	2390.00	42.9 AV	54.0	-11.1	2.83 H	195	46.5	-3.6
3	*2437.00	104.5 PK			2.83 H	195	108.0	-3.5
4	*2437.00	102.3 AV			2.83 H	195	105.8	-3.5
5	2483.50	52.1 PK	74.0	-21.9	2.83 H	195	55.5	-3.4
6	2483.50	42.6 AV	54.0	-11.4	2.83 H	195	46.0	-3.4
7	4874.00	47.1 PK	74.0	-26.9	1.03 H	179	45.6	1.5
8	4874.00	45.7 AV	54.0	-8.3	1.03 H	179	44.2	1.5
9	7311.00	54.4 PK	74.0	-19.6	1.07 H	238	46.8	7.6
10	7311.00	50.5 AV	54.0	-3.5	1.07 H	238	42.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

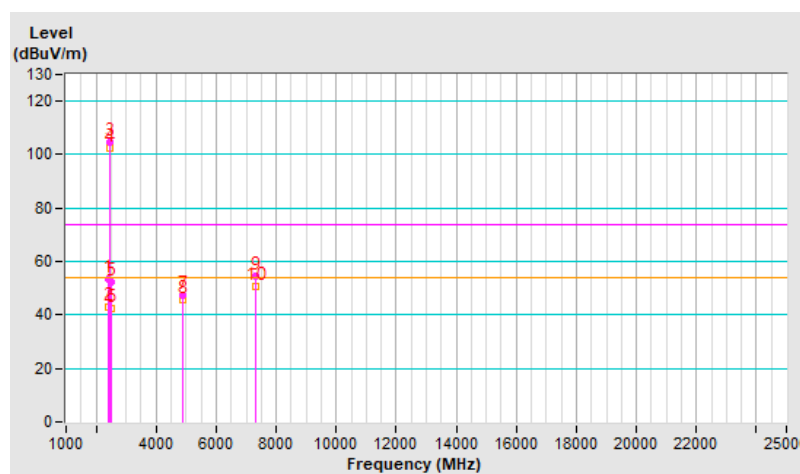


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.2 PK	74.0	-17.8	1.34 V	287	59.8	-3.6
2	2390.00	43.6 AV	54.0	-10.4	1.34 V	287	47.2	-3.6
3	*2437.00	113.4 PK			1.34 V	287	116.9	-3.5
4	*2437.00	111.0 AV			1.34 V	287	114.5	-3.5
5	2483.50	55.2 PK	74.0	-18.8	1.34 V	287	58.6	-3.4
6	2483.50	43.9 AV	54.0	-10.1	1.34 V	287	47.3	-3.4
7	4874.00	45.4 PK	74.0	-28.6	1.00 V	191	43.9	1.5
8	4874.00	43.4 AV	54.0	-10.6	1.00 V	191	41.9	1.5
9	7311.00	53.9 PK	74.0	-20.1	1.16 V	301	46.3	7.6
10	7311.00	49.6 AV	54.0	-4.4	1.16 V	301	42.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

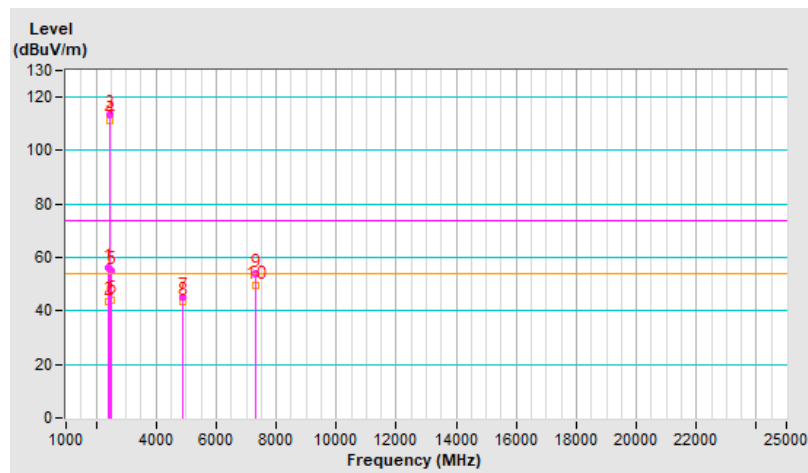


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.5 PK			2.84 H	202	102.0	-3.5
2	*2462.00	95.7 AV			2.84 H	202	99.2	-3.5
3	2483.50	54.3 PK	74.0	-19.7	2.84 H	202	57.7	-3.4
4	2483.50	42.6 AV	54.0	-11.4	2.84 H	202	46.0	-3.4
5	4924.00	47.2 PK	74.0	-26.8	1.00 H	183	45.6	1.6
6	4924.00	45.6 AV	54.0	-8.4	1.00 H	183	44.0	1.6
7	7386.00	54.0 PK	74.0	-20.0	1.08 H	243	46.1	7.9
8	7386.00	50.2 AV	54.0	-3.8	1.08 H	243	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

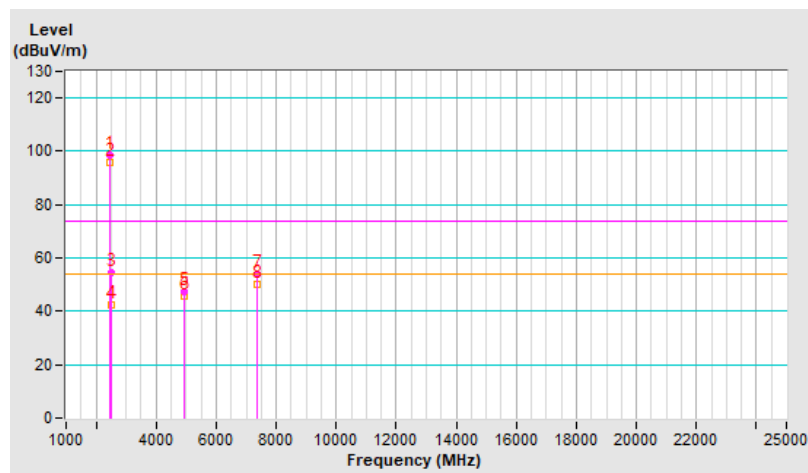


RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.5 PK			1.27 V	301	111.0	-3.5
2	*2462.00	105.0 AV			1.27 V	301	108.5	-3.5
3	2483.50	57.4 PK	74.0	-16.6	1.27 V	301	60.8	-3.4
4	2483.50	45.7 AV	54.0	-8.3	1.27 V	301	49.1	-3.4
5	4924.00	46.3 PK	74.0	-27.7	1.00 V	206	44.7	1.6
6	4924.00	44.0 AV	54.0	-10.0	1.00 V	206	42.4	1.6
7	7386.00	54.8 PK	74.0	-19.2	1.20 V	289	46.9	7.9
8	7386.00	50.3 AV	54.0	-3.7	1.20 V	289	42.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

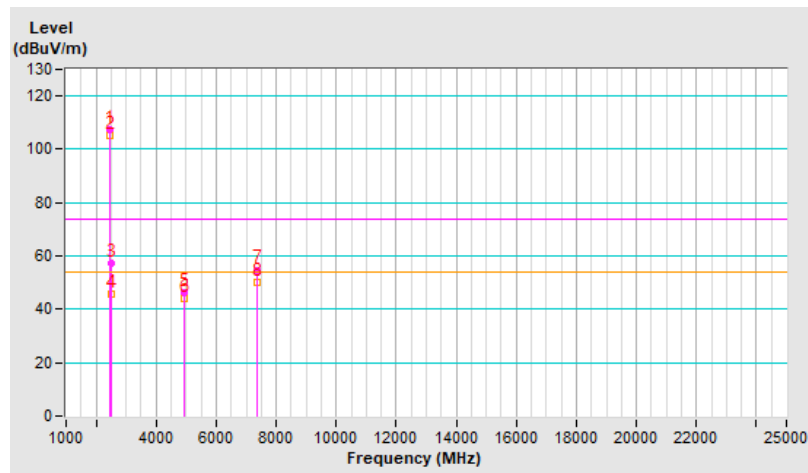


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	93.5 PK			2.87 H	180	96.9	-3.4
2	*2467.00	90.6 AV			2.87 H	180	94.0	-3.4
3	2483.50	54.6 PK	74.0	-19.4	2.87 H	180	58.0	-3.4
4	2483.50	42.5 AV	54.0	-11.5	2.87 H	180	45.9	-3.4
5	4934.00	47.8 PK	74.0	-26.2	1.06 H	160	46.2	1.6
6	4934.00	46.0 AV	54.0	-8.0	1.06 H	160	44.4	1.6
7	7401.00	54.1 PK	74.0	-19.9	1.17 H	241	46.2	7.9
8	7401.00	50.1 AV	54.0	-3.9	1.17 H	241	42.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

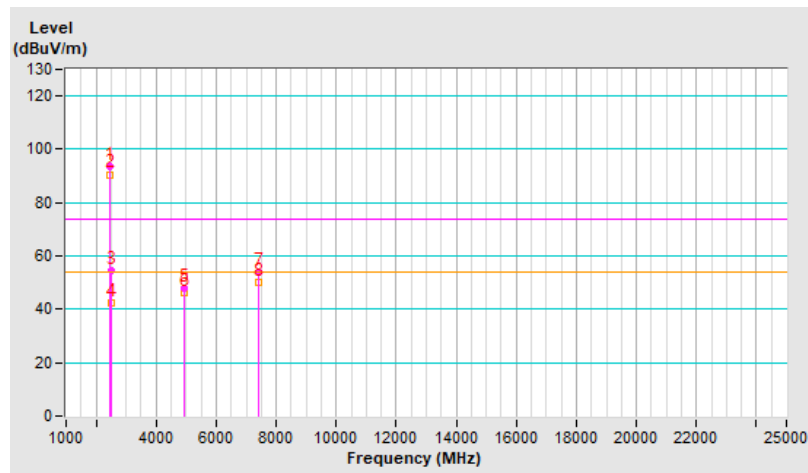


RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	103.4 PK			1.25 V	292	106.8	-3.4
2	*2467.00	100.9 AV			1.25 V	292	104.3	-3.4
3	2483.50	57.0 PK	74.0	-17.0	1.25 V	292	60.4	-3.4
4	2483.50	48.9 AV	54.0	-5.1	1.25 V	292	52.3	-3.4
5	4934.00	45.8 PK	74.0	-28.2	1.00 V	220	44.2	1.6
6	4934.00	43.6 AV	54.0	-10.4	1.00 V	220	42.0	1.6
7	7401.00	54.5 PK	74.0	-19.5	1.11 V	292	46.6	7.9
8	7401.00	50.4 AV	54.0	-3.6	1.11 V	292	42.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

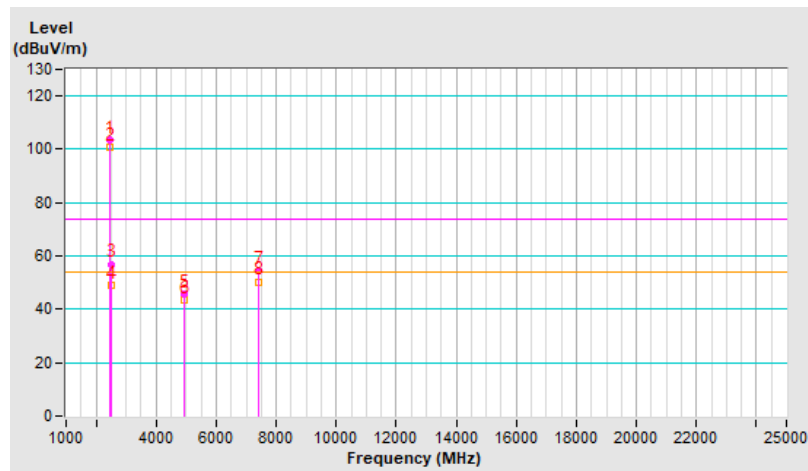


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	89.1 PK			2.89 H	200	92.5	-3.4
2	*2472.00	86.5 AV			2.89 H	200	89.9	-3.4
3	2483.50	54.3 PK	74.0	-19.7	2.89 H	200	57.7	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.89 H	200	45.7	-3.4
5	4944.00	47.1 PK	74.0	-26.9	1.01 H	173	45.5	1.6
6	4944.00	45.5 AV	54.0	-8.5	1.01 H	173	43.9	1.6
7	7416.00	53.9 PK	74.0	-20.1	1.10 H	218	46.1	7.8
8	7416.00	50.3 AV	54.0	-3.7	1.10 H	218	42.5	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

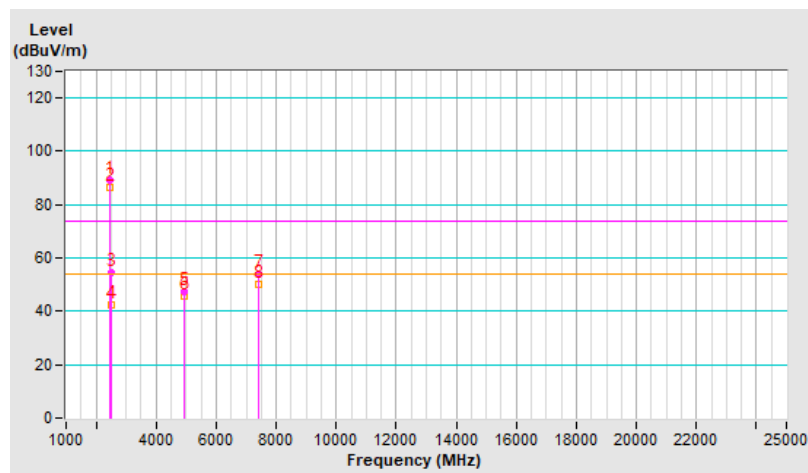


RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	100.1 PK			1.26 V	295	103.5	-3.4
2	*2472.00	97.6 AV			1.26 V	295	101.0	-3.4
3	2483.50	57.3 PK	74.0	-16.7	1.26 V	295	60.7	-3.4
4	2483.50	50.4 AV	54.0	-3.6	1.26 V	295	53.8	-3.4
5	4944.00	45.6 PK	74.0	-28.4	1.00 V	204	44.0	1.6
6	4944.00	43.7 AV	54.0	-10.3	1.00 V	204	42.1	1.6
7	7416.00	53.8 PK	74.0	-20.2	1.22 V	314	46.0	7.8
8	7416.00	49.6 AV	54.0	-4.4	1.22 V	314	41.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

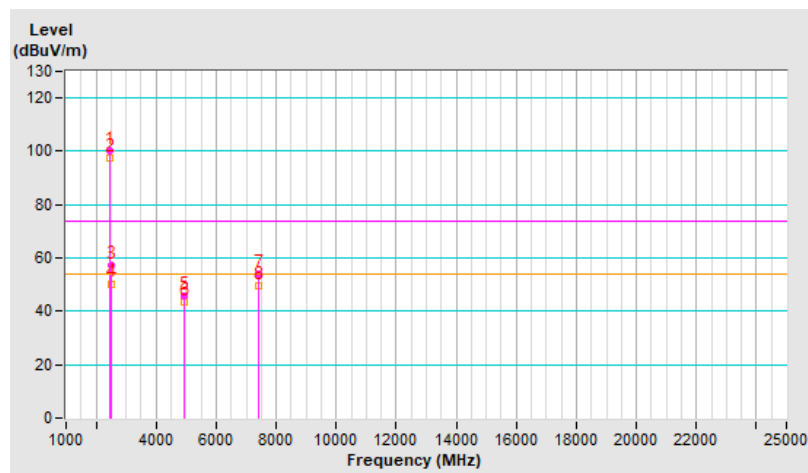


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	2.88 H	183	62.8	-3.6
2	2390.00	41.9 AV	54.0	-12.1	2.88 H	183	45.5	-3.6
3	*2412.00	99.5 PK			2.88 H	183	103.0	-3.5
4	*2412.00	90.1 AV			2.88 H	183	93.6	-3.5
5	4824.00	47.3 PK	74.0	-26.7	1.04 H	183	45.6	1.7
6	4824.00	46.1 AV	54.0	-7.9	1.04 H	183	44.4	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

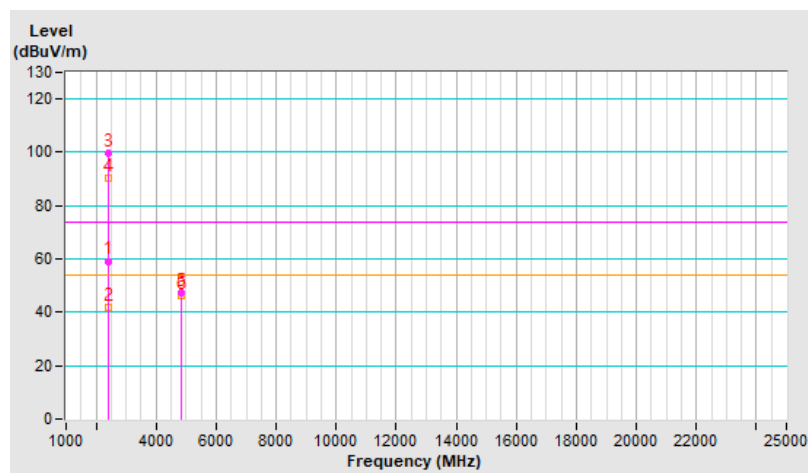


RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	1.28 V	293	62.5	-3.6
2	2390.00	45.5 AV	54.0	-8.5	1.28 V	293	49.1	-3.6
3	*2412.00	112.7 PK			1.28 V	293	116.2	-3.5
4	*2412.00	104.6 AV			1.28 V	293	108.1	-3.5
5	4824.00	45.1 PK	74.0	-28.9	1.00 V	193	43.4	1.7
6	4824.00	43.3 AV	54.0	-10.7	1.00 V	193	41.6	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

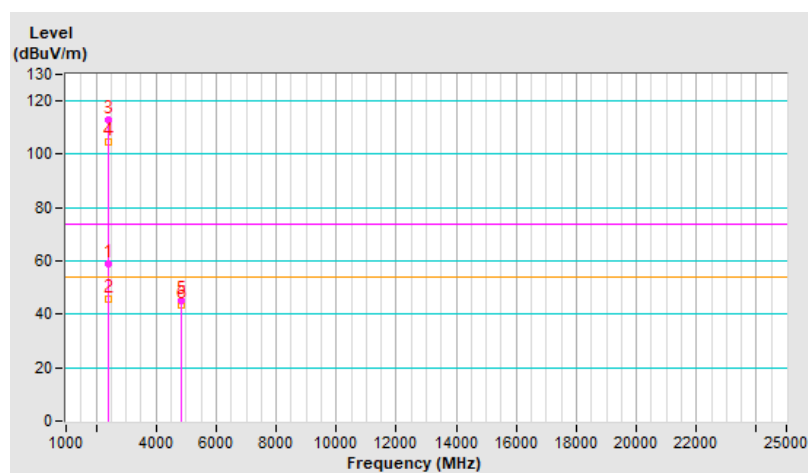


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	2.88 H	180	65.7	-3.6
2	2390.00	46.6 AV	54.0	-7.4	2.88 H	180	50.2	-3.6
3	*2437.00	104.1 PK			2.88 H	180	107.6	-3.5
4	*2437.00	94.6 AV			2.88 H	180	98.1	-3.5
5	2483.50	63.5 PK	74.0	-10.5	2.88 H	180	66.9	-3.4
6	2483.50	45.2 AV	54.0	-8.8	2.88 H	180	48.6	-3.4
7	4874.00	47.1 PK	74.0	-26.9	1.11 H	164	45.6	1.5
8	4874.00	45.3 AV	54.0	-8.7	1.11 H	164	43.8	1.5
9	7311.00	54.3 PK	74.0	-19.7	1.18 H	230	46.7	7.6
10	7311.00	50.4 AV	54.0	-3.6	1.18 H	230	42.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

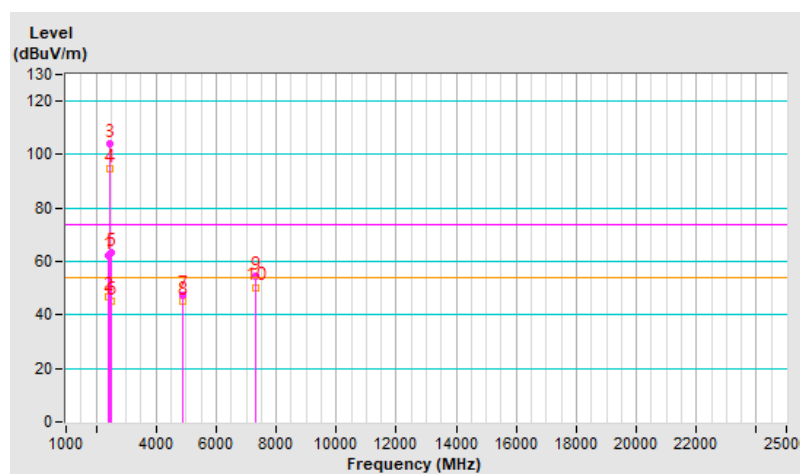


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	1.30 V	282	66.9	-3.6
2	2390.00	47.6 AV	54.0	-6.4	1.30 V	282	51.2	-3.6
3	*2437.00	116.5 PK			1.30 V	282	120.0	-3.5
4	*2437.00	107.5 AV			1.30 V	282	111.0	-3.5
5	2483.50	64.6 PK	74.0	-9.4	1.30 V	282	68.0	-3.4
6	2483.50	46.0 AV	54.0	-8.0	1.30 V	282	49.4	-3.4
7	4874.00	46.1 PK	74.0	-27.9	1.00 V	195	44.6	1.5
8	4874.00	43.8 AV	54.0	-10.2	1.00 V	195	42.3	1.5
9	7311.00	54.2 PK	74.0	-19.8	1.16 V	316	46.6	7.6
10	7311.00	50.0 AV	54.0	-4.0	1.16 V	316	42.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

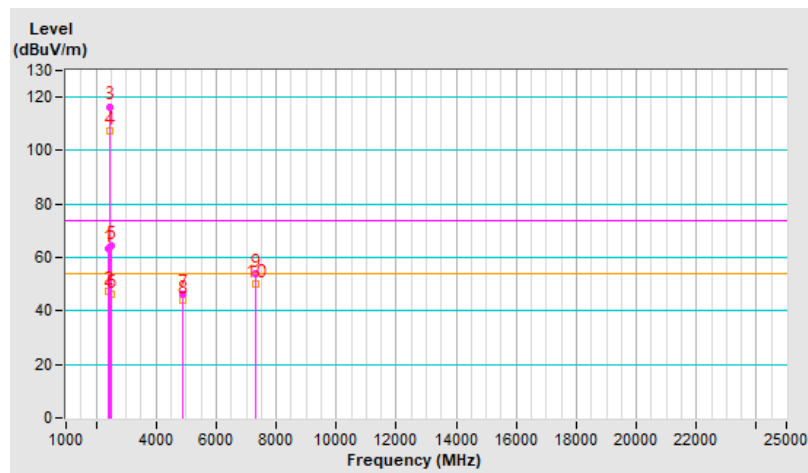


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.5 PK			2.83 H	186	104.0	-3.5
2	*2462.00	90.2 AV			2.83 H	186	93.7	-3.5
3	2483.50	56.3 PK	74.0	-17.7	2.83 H	186	59.7	-3.4
4	2483.50	41.9 AV	54.0	-12.1	2.83 H	186	45.3	-3.4
5	4924.00	47.2 PK	74.0	-26.8	1.10 H	175	45.6	1.6
6	4924.00	45.4 AV	54.0	-8.6	1.10 H	175	43.8	1.6
7	7386.00	54.4 PK	74.0	-19.6	1.16 H	236	46.5	7.9
8	7386.00	50.7 AV	54.0	-3.3	1.16 H	236	42.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

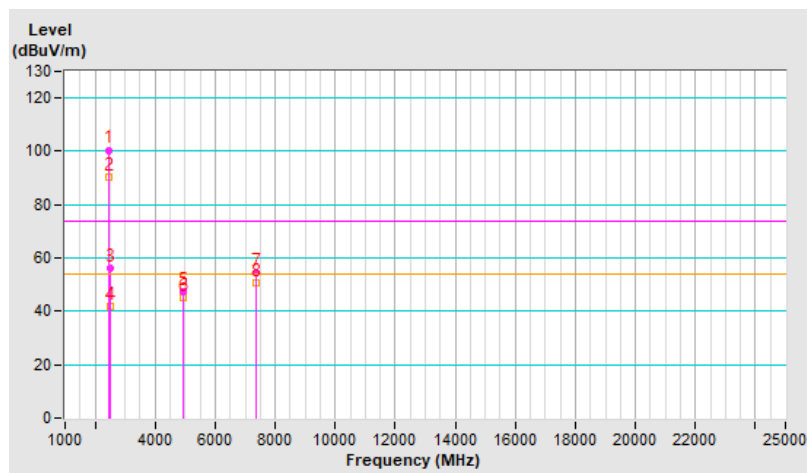


RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.8 PK			1.28 V	296	116.3	-3.5
2	*2462.00	103.2 AV			1.28 V	296	106.7	-3.5
3	2483.50	73.0 PK	74.0	-1.0	1.28 V	296	76.4	-3.4
4	2483.50	50.1 AV	54.0	-3.9	1.28 V	296	53.5	-3.4
5	4924.00	46.1 PK	74.0	-27.9	1.00 V	201	44.5	1.6
6	4924.00	44.1 AV	54.0	-9.9	1.00 V	201	42.5	1.6
7	7386.00	54.3 PK	74.0	-19.7	1.19 V	312	46.4	7.9
8	7386.00	50.1 AV	54.0	-3.9	1.19 V	312	42.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

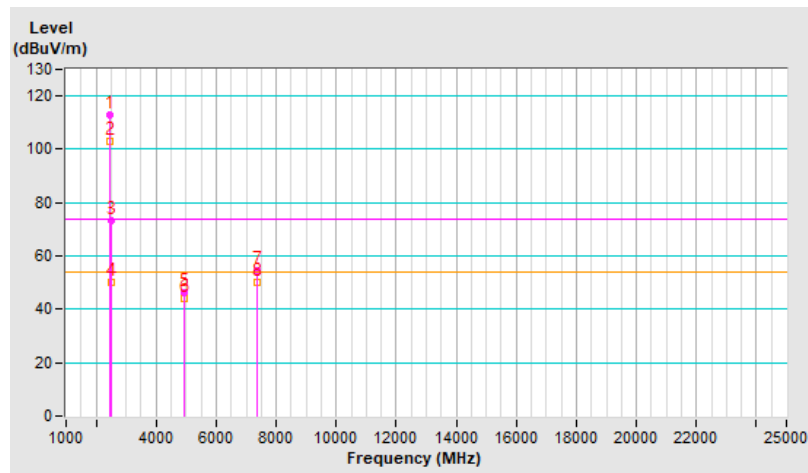


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	100.2 PK			2.84 H	191	103.6	-3.4
2	*2467.00	90.6 AV			2.84 H	191	94.0	-3.4
3	2483.50	56.9 PK	74.0	-17.1	2.84 H	191	60.3	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.84 H	191	45.7	-3.4
5	4934.00	47.5 PK	74.0	-26.5	1.08 H	159	45.9	1.6
6	4934.00	46.0 AV	54.0	-8.0	1.08 H	159	44.4	1.6
7	7401.00	53.7 PK	74.0	-20.3	1.06 H	245	45.8	7.9
8	7401.00	50.2 AV	54.0	-3.8	1.06 H	245	42.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

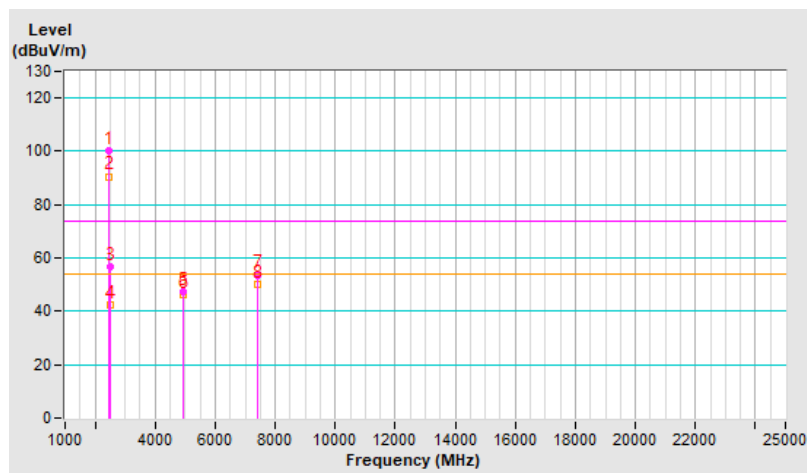


RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.1 PK			1.34 V	300	114.5	-3.4
2	*2467.00	101.8 AV			1.34 V	300	105.2	-3.4
3	2483.50	71.8 PK	74.0	-2.2	1.34 V	300	75.2	-3.4
4	2483.50	49.5 AV	54.0	-4.5	1.34 V	300	52.9	-3.4
5	4934.00	45.9 PK	74.0	-28.1	1.00 V	196	44.3	1.6
6	4934.00	43.7 AV	54.0	-10.3	1.00 V	196	42.1	1.6
7	7401.00	54.1 PK	74.0	-19.9	1.18 V	287	46.2	7.9
8	7401.00	49.6 AV	54.0	-4.4	1.18 V	287	41.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

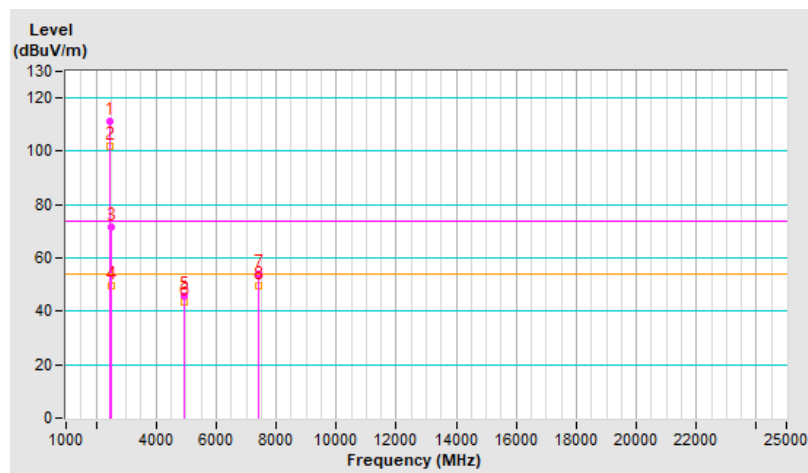


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.1 PK			2.88 H	179	102.5	-3.4
2	*2472.00	90.8 AV			2.88 H	179	94.2	-3.4
3	2483.50	55.2 PK	74.0	-18.8	2.88 H	179	58.6	-3.4
4	2483.50	42.8 AV	54.0	-11.2	2.88 H	179	46.2	-3.4
5	4944.00	48.0 PK	74.0	-26.0	1.10 H	160	46.4	1.6
6	4944.00	46.1 AV	54.0	-7.9	1.10 H	160	44.5	1.6
7	7416.00	53.8 PK	74.0	-20.2	1.12 H	238	46.0	7.8
8	7416.00	50.2 AV	54.0	-3.8	1.12 H	238	42.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

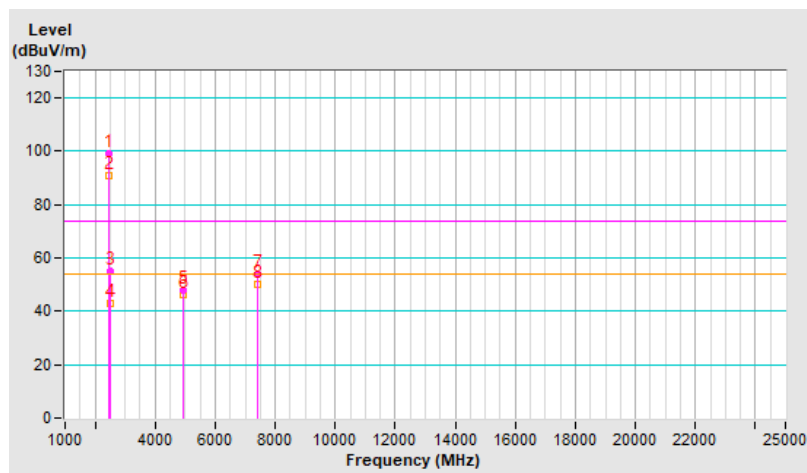


RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.2 PK			1.34 V	293	113.6	-3.4
2	*2472.00	101.3 AV			1.34 V	293	104.7	-3.4
3	2483.50	66.3 PK	74.0	-7.7	1.34 V	293	69.7	-3.4
4	2483.50	50.6 AV	54.0	-3.4	1.34 V	293	54.0	-3.4
5	4944.00	46.2 PK	74.0	-27.8	1.00 V	215	44.6	1.6
6	4944.00	44.1 AV	54.0	-9.9	1.00 V	215	42.5	1.6
7	7416.00	53.6 PK	74.0	-20.4	1.20 V	288	45.8	7.8
8	7416.00	49.6 AV	54.0	-4.4	1.20 V	288	41.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

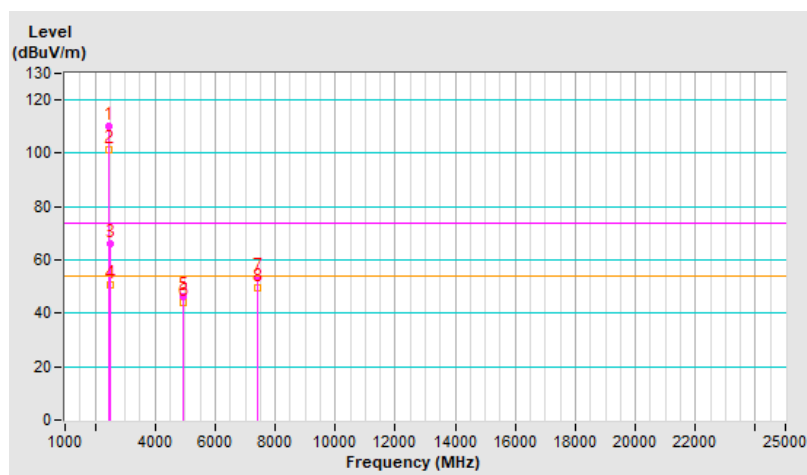


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	2.90 H	202	60.5	-3.6
2	2390.00	42.5 AV	54.0	-11.5	2.90 H	202	46.1	-3.6
3	*2412.00	101.8 PK			2.90 H	202	105.3	-3.5
4	*2412.00	89.9 AV			2.90 H	202	93.4	-3.5
5	4824.00	47.6 PK	74.0	-26.4	1.06 H	185	45.9	1.7
6	4824.00	45.9 AV	54.0	-8.1	1.06 H	185	44.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

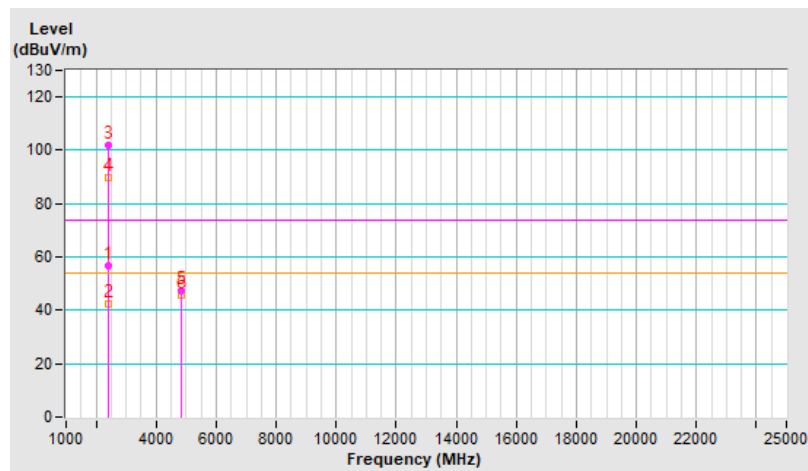


RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.0 PK	74.0	-17.0	1.32 V	311	60.6	-3.6
2	2390.00	43.9 AV	54.0	-10.1	1.32 V	311	47.5	-3.6
3	*2412.00	112.7 PK			1.32 V	311	116.2	-3.5
4	*2412.00	101.5 AV			1.32 V	311	105.0	-3.5
5	4824.00	45.3 PK	74.0	-28.7	1.00 V	188	43.6	1.7
6	4824.00	43.1 AV	54.0	-10.9	1.00 V	188	41.4	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

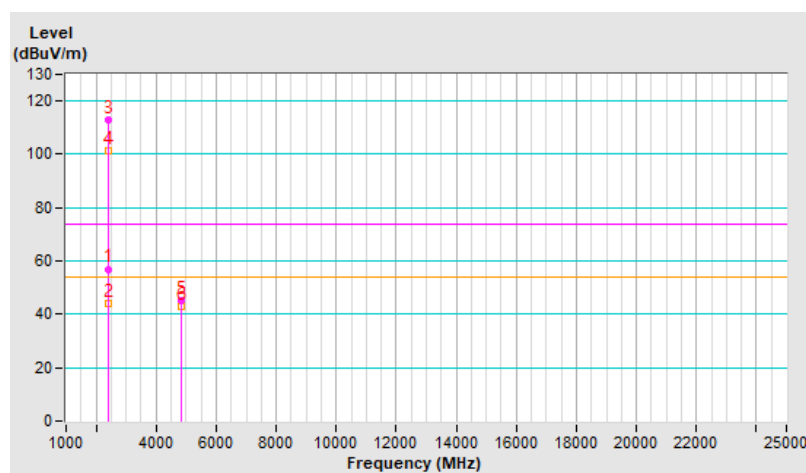


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.0 PK	74.0	-13.0	2.85 H	180	64.6	-3.6
2	2390.00	45.2 AV	54.0	-8.8	2.85 H	180	48.8	-3.6
3	*2437.00	106.5 PK			2.85 H	180	110.0	-3.5
4	*2437.00	95.2 AV			2.85 H	180	98.7	-3.5
5	2483.50	61.3 PK	74.0	-12.7	2.85 H	180	64.7	-3.4
6	2483.50	45.3 AV	54.0	-8.7	2.85 H	180	48.7	-3.4
7	4874.00	47.2 PK	74.0	-26.8	1.03 H	172	45.7	1.5
8	4874.00	45.7 AV	54.0	-8.3	1.03 H	172	44.2	1.5
9	7311.00	54.6 PK	74.0	-19.4	1.16 H	247	47.0	7.6
10	7311.00	50.7 AV	54.0	-3.3	1.16 H	247	43.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

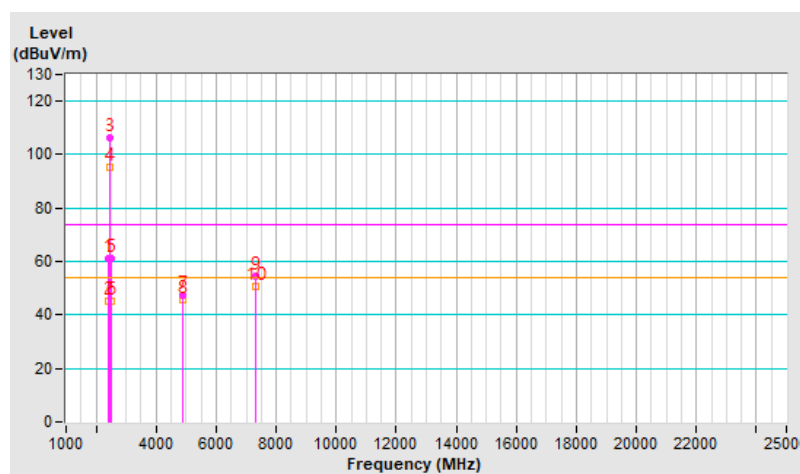


RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.1 PK	74.0	-10.9	1.32 V	303	66.7	-3.6
2	2390.00	46.3 AV	54.0	-7.7	1.32 V	303	49.9	-3.6
3	*2437.00	118.2 PK			1.32 V	303	121.7	-3.5
4	*2437.00	107.2 AV			1.32 V	303	110.7	-3.5
5	2483.50	64.5 PK	74.0	-9.5	1.32 V	303	67.9	-3.4
6	2483.50	46.5 AV	54.0	-7.5	1.32 V	303	49.9	-3.4
7	4874.00	45.7 PK	74.0	-28.3	1.00 V	216	44.2	1.5
8	4874.00	43.6 AV	54.0	-10.4	1.00 V	216	42.1	1.5
9	7311.00	54.7 PK	74.0	-19.3	1.21 V	296	47.1	7.6
10	7311.00	50.4 AV	54.0	-3.6	1.21 V	296	42.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

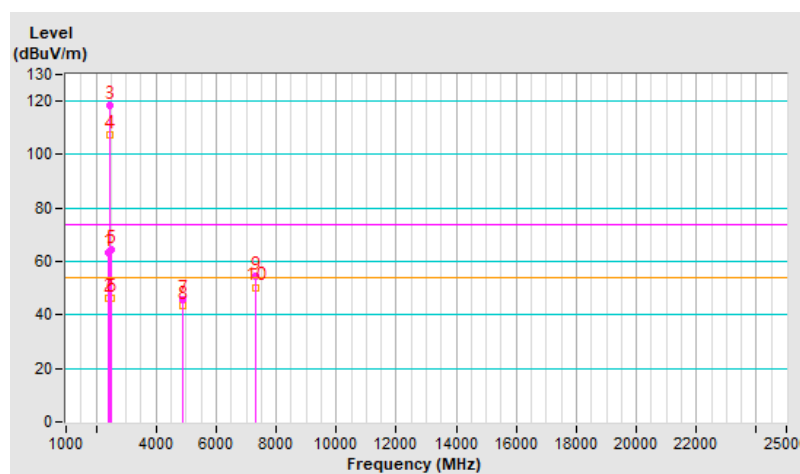


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.4 PK			2.93 H	200	104.9	-3.5
2	*2462.00	88.5 AV			2.93 H	200	92.0	-3.5
3	2483.50	54.8 PK	74.0	-19.2	2.93 H	200	58.2	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.93 H	200	45.7	-3.4
5	4924.00	46.9 PK	74.0	-27.1	1.00 H	170	45.3	1.6
6	4924.00	45.5 AV	54.0	-8.5	1.00 H	170	43.9	1.6
7	7386.00	54.2 PK	74.0	-19.8	1.10 H	233	46.3	7.9
8	7386.00	50.7 AV	54.0	-3.3	1.10 H	233	42.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

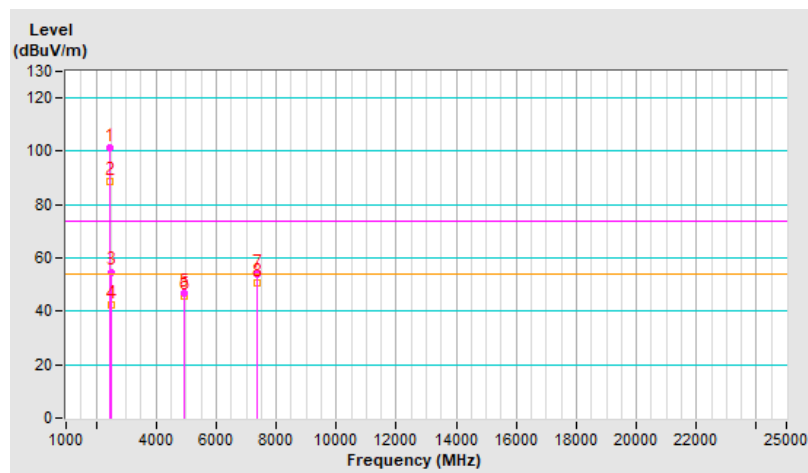


RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.2 PK			1.34 V	297	114.7	-3.5
2	*2462.00	99.5 AV			1.34 V	297	103.0	-3.5
3	2483.50	58.9 PK	74.0	-15.1	1.34 V	297	62.3	-3.4
4	2483.50	46.2 AV	54.0	-7.8	1.34 V	297	49.6	-3.4
5	4924.00	46.1 PK	74.0	-27.9	1.00 V	199	44.5	1.6
6	4924.00	43.8 AV	54.0	-10.2	1.00 V	199	42.2	1.6
7	7386.00	54.2 PK	74.0	-19.8	1.19 V	297	46.3	7.9
8	7386.00	50.1 AV	54.0	-3.9	1.19 V	297	42.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

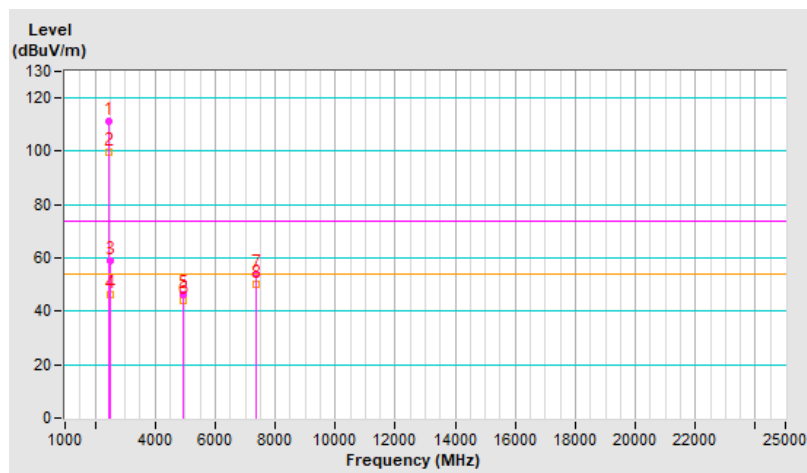


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	101.5 PK			2.88 H	209	104.9	-3.4
2	*2467.00	90.6 AV			2.88 H	209	94.0	-3.4
3	2483.50	65.0 PK	74.0	-9.0	2.88 H	209	68.4	-3.4
4	2483.50	42.6 AV	54.0	-11.4	2.88 H	209	46.0	-3.4
5	4934.00	46.9 PK	74.0	-27.1	1.09 H	158	45.3	1.6
6	4934.00	45.5 AV	54.0	-8.5	1.09 H	158	43.9	1.6
7	7401.00	54.3 PK	74.0	-19.7	1.07 H	242	46.4	7.9
8	7401.00	50.5 AV	54.0	-3.5	1.07 H	242	42.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

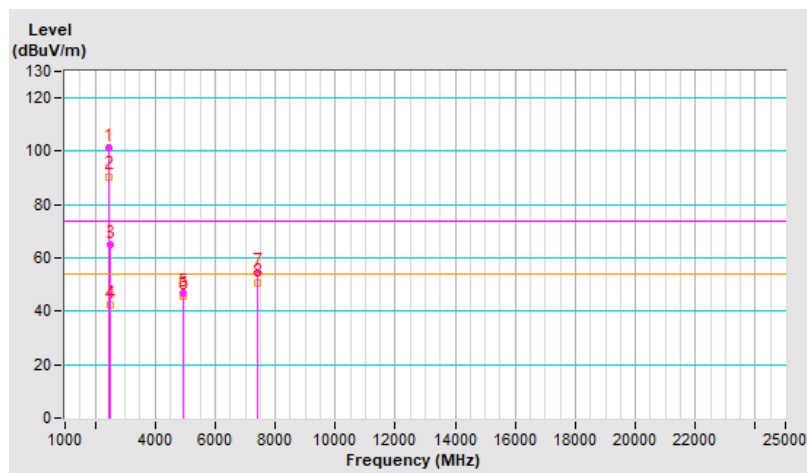


RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.5 PK			1.26 V	281	114.9	-3.4
2	*2467.00	100.0 AV			1.26 V	281	103.4	-3.4
3	2483.50	65.3 PK	74.0	-8.7	1.26 V	281	68.7	-3.4
4	2483.50	48.0 AV	54.0	-6.0	1.26 V	281	51.4	-3.4
5	4934.00	46.2 PK	74.0	-27.8	1.00 V	215	44.6	1.6
6	4934.00	43.9 AV	54.0	-10.1	1.00 V	215	42.3	1.6
7	7401.00	54.5 PK	74.0	-19.5	1.15 V	312	46.6	7.9
8	7401.00	50.0 AV	54.0	-4.0	1.15 V	312	42.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

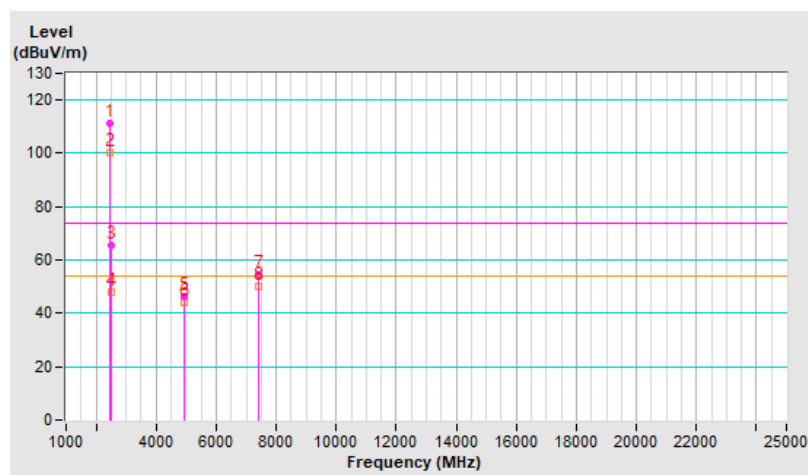


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	100.4 PK			2.93 H	187	103.8	-3.4
2	*2472.00	89.7 AV			2.93 H	187	93.1	-3.4
3	2483.50	57.5 PK	74.0	-16.5	2.93 H	187	60.9	-3.4
4	2483.50	42.9 AV	54.0	-11.1	2.93 H	187	46.3	-3.4
5	4944.00	47.1 PK	74.0	-26.9	1.12 H	153	45.5	1.6
6	4944.00	46.0 AV	54.0	-8.0	1.12 H	153	44.4	1.6
7	7416.00	54.5 PK	74.0	-19.5	1.07 H	248	46.7	7.8
8	7416.00	50.8 AV	54.0	-3.2	1.07 H	248	43.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

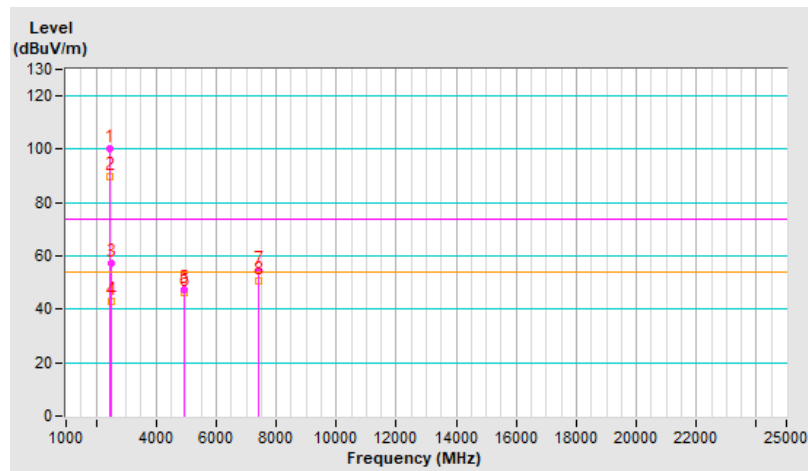


RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.7 PK			1.25 V	301	114.1	-3.4
2	*2472.00	100.2 AV			1.25 V	301	103.6	-3.4
3	2483.50	64.6 PK	74.0	-9.4	1.25 V	301	68.0	-3.4
4	2483.50	50.4 AV	54.0	-3.6	1.25 V	301	53.8	-3.4
5	4944.00	45.6 PK	74.0	-28.4	1.00 V	214	44.0	1.6
6	4944.00	43.6 AV	54.0	-10.4	1.00 V	214	42.0	1.6
7	7416.00	53.9 PK	74.0	-20.1	1.11 V	316	46.1	7.8
8	7416.00	49.8 AV	54.0	-4.2	1.11 V	316	42.0	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

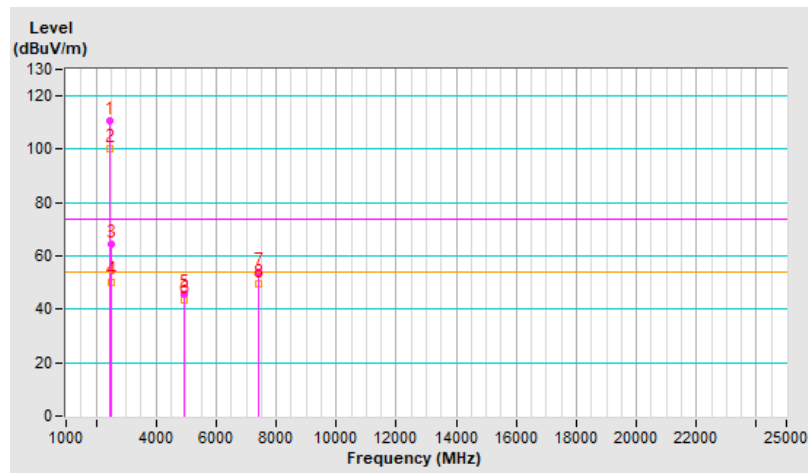


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.2 PK	74.0	-13.8	2.83 H	186	63.8	-3.6
2	2390.00	42.3 AV	54.0	-11.7	2.83 H	186	45.9	-3.6
3	*2422.00	98.9 PK			2.83 H	186	102.4	-3.5
4	*2422.00	87.6 AV			2.83 H	186	91.1	-3.5
5	4844.00	47.1 PK	74.0	-26.9	1.06 H	189	45.5	1.6
6	4844.00	45.7 AV	54.0	-8.3	1.06 H	189	44.1	1.6
7	7266.00	54.0 PK	74.0	-20.0	1.08 H	228	46.7	7.3
8	7266.00	50.1 AV	54.0	-3.9	1.08 H	228	42.8	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

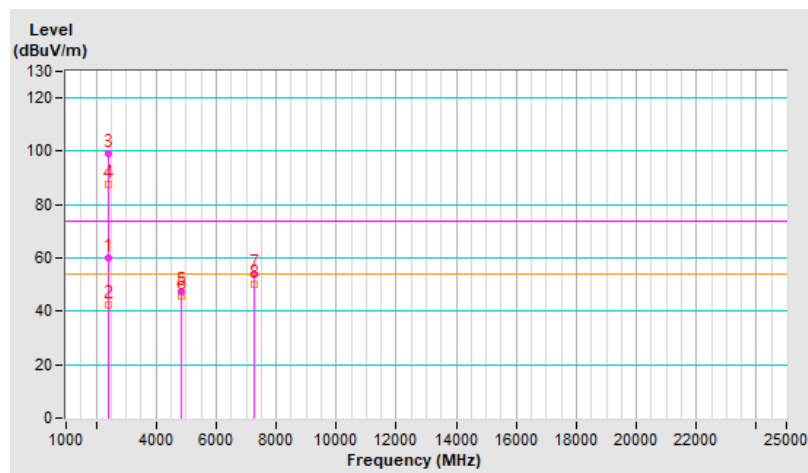


RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.34 V	287	59.5	-3.6
2	2390.00	43.1 AV	54.0	-10.9	1.34 V	287	46.7	-3.6
3	*2422.00	110.7 PK			1.34 V	287	114.2	-3.5
4	*2422.00	98.5 AV			1.34 V	287	102.0	-3.5
5	4844.00	45.4 PK	74.0	-28.6	1.00 V	208	43.8	1.6
6	4844.00	43.5 AV	54.0	-10.5	1.00 V	208	41.9	1.6
7	7266.00	54.1 PK	74.0	-19.9	1.16 V	312	46.8	7.3
8	7266.00	49.5 AV	54.0	-4.5	1.16 V	312	42.2	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

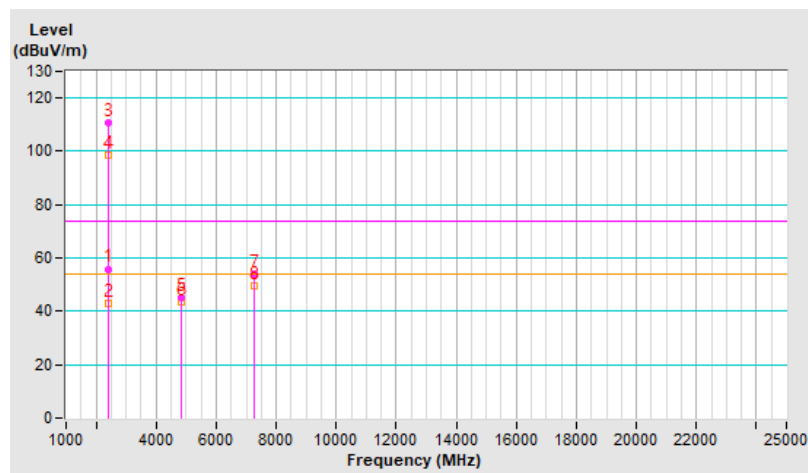


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	2.90 H	197	71.2	-3.6
2	2390.00	45.6 AV	54.0	-8.4	2.90 H	197	49.2	-3.6
3	*2437.00	101.5 PK			2.90 H	197	105.0	-3.5
4	*2437.00	90.1 AV			2.90 H	197	93.6	-3.5
5	2483.50	65.3 PK	74.0	-8.7	2.90 H	197	68.7	-3.4
6	2483.50	50.1 AV	54.0	-3.9	2.90 H	197	53.5	-3.4
7	4874.00	47.2 PK	74.0	-26.8	1.00 H	168	45.7	1.5
8	4874.00	45.6 AV	54.0	-8.4	1.00 H	168	44.1	1.5
9	7311.00	54.1 PK	74.0	-19.9	1.18 H	237	46.5	7.6
10	7311.00	50.5 AV	54.0	-3.5	1.18 H	237	42.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

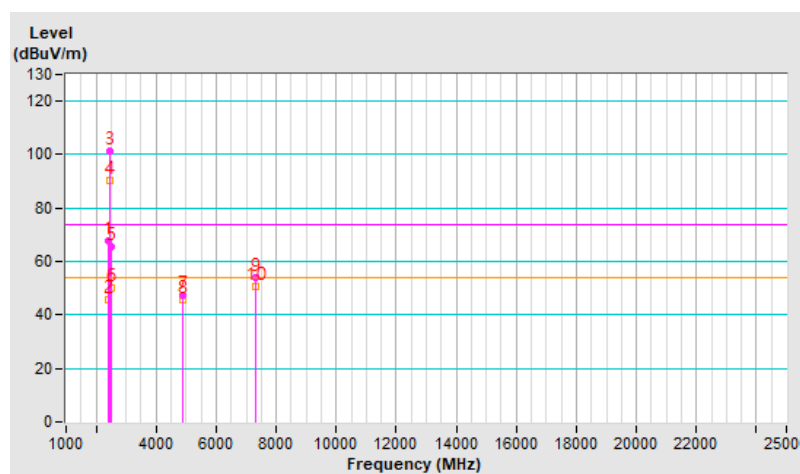


RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.24 V	304	71.8	-3.6
2	2390.00	47.9 AV	54.0	-6.1	1.24 V	304	51.5	-3.6
3	*2437.00	111.3 PK			1.24 V	304	114.8	-3.5
4	*2437.00	99.3 AV			1.24 V	304	102.8	-3.5
5	2483.50	66.3 PK	74.0	-7.7	1.24 V	304	69.7	-3.4
6	2483.50	51.3 AV	54.0	-2.7	1.24 V	304	54.7	-3.4
7	4874.00	46.5 PK	74.0	-27.5	1.00 V	219	45.0	1.5
8	4874.00	44.3 AV	54.0	-9.7	1.00 V	219	42.8	1.5
9	7311.00	53.5 PK	74.0	-20.5	1.21 V	295	45.9	7.6
10	7311.00	49.4 AV	54.0	-4.6	1.21 V	295	41.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

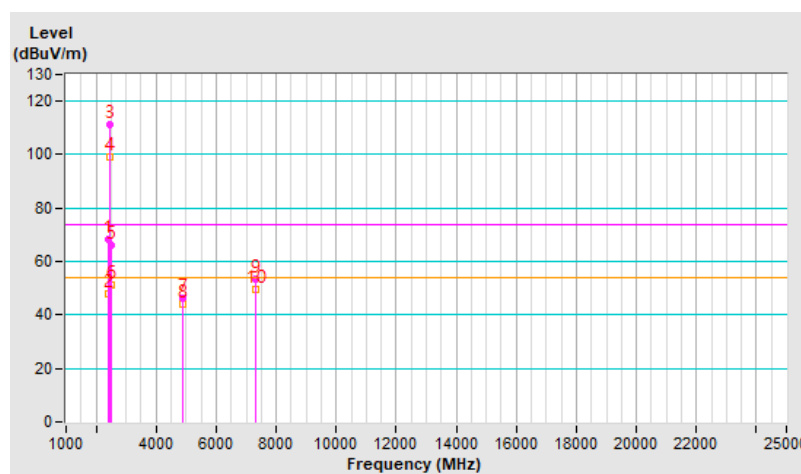


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	100.2 PK			2.84 H	195	103.6	-3.4
2	*2452.00	86.9 AV			2.84 H	195	90.3	-3.4
3	2483.50	55.3 PK	74.0	-18.7	2.84 H	195	58.7	-3.4
4	2483.50	42.6 AV	54.0	-11.4	2.84 H	195	46.0	-3.4
5	4904.00	47.3 PK	74.0	-26.7	1.10 H	167	45.8	1.5
6	4904.00	45.7 AV	54.0	-8.3	1.10 H	167	44.2	1.5
7	7356.00	54.6 PK	74.0	-19.4	1.07 H	242	46.7	7.9
8	7356.00	50.7 AV	54.0	-3.3	1.07 H	242	42.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

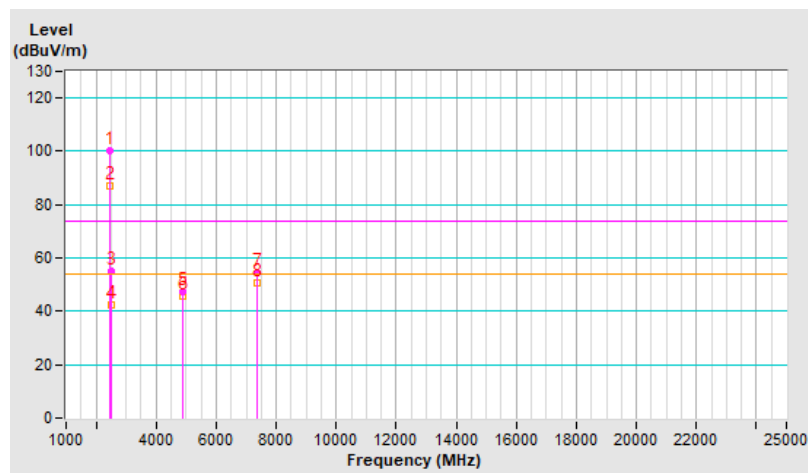


RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	110.4 PK			1.26 V	291	113.8	-3.4
2	*2452.00	98.1 AV			1.26 V	291	101.5	-3.4
3	2483.50	58.3 PK	74.0	-15.7	1.26 V	291	61.7	-3.4
4	2483.50	46.3 AV	54.0	-7.7	1.26 V	291	49.7	-3.4
5	4904.00	46.5 PK	74.0	-27.5	1.00 V	193	45.0	1.5
6	4904.00	44.2 AV	54.0	-9.8	1.00 V	193	42.7	1.5
7	7356.00	54.3 PK	74.0	-19.7	1.11 V	297	46.4	7.9
8	7356.00	50.1 AV	54.0	-3.9	1.11 V	297	42.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

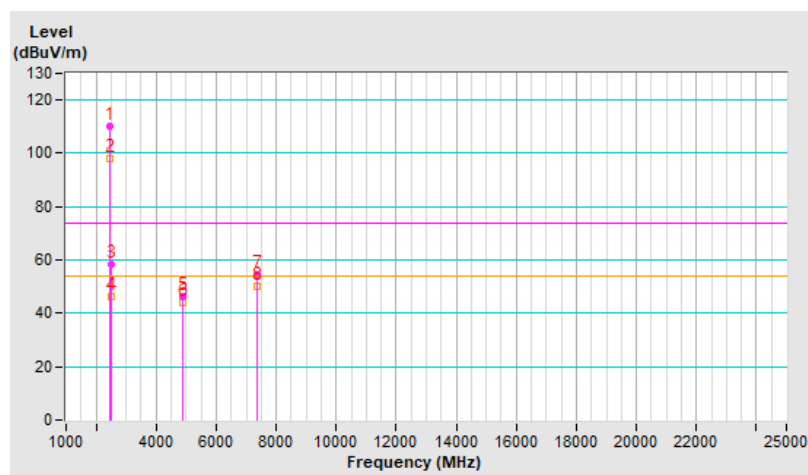


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	98.2 PK			2.85 H	179	101.6	-3.4
2	*2457.00	86.4 AV			2.85 H	179	89.8	-3.4
3	2483.50	55.1 PK	74.0	-18.9	2.85 H	179	58.5	-3.4
4	2483.50	43.0 AV	54.0	-11.0	2.85 H	179	46.4	-3.4
5	4914.00	47.2 PK	74.0	-26.8	1.02 H	176	45.7	1.5
6	4914.00	45.7 AV	54.0	-8.3	1.02 H	176	44.2	1.5
7	7371.00	54.2 PK	74.0	-19.8	1.18 H	233	46.4	7.8
8	7371.00	50.7 AV	54.0	-3.3	1.18 H	233	42.9	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

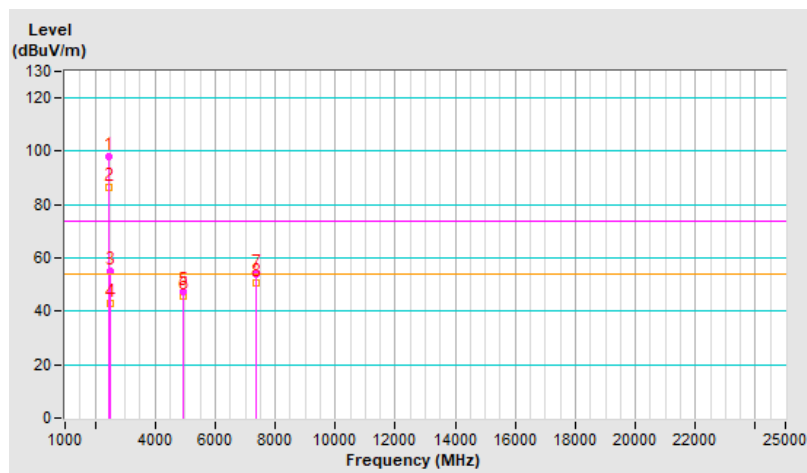


RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.5 PK			1.34 V	312	111.9	-3.4
2	*2457.00	97.3 AV			1.34 V	312	100.7	-3.4
3	2483.50	61.9 PK	74.0	-12.1	1.34 V	312	65.3	-3.4
4	2483.50	48.0 AV	54.0	-6.0	1.34 V	312	51.4	-3.4
5	4914.00	45.9 PK	74.0	-28.1	1.00 V	221	44.4	1.5
6	4914.00	44.1 AV	54.0	-9.9	1.00 V	221	42.6	1.5
7	7371.00	54.1 PK	74.0	-19.9	1.11 V	291	46.3	7.8
8	7371.00	49.7 AV	54.0	-4.3	1.11 V	291	41.9	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

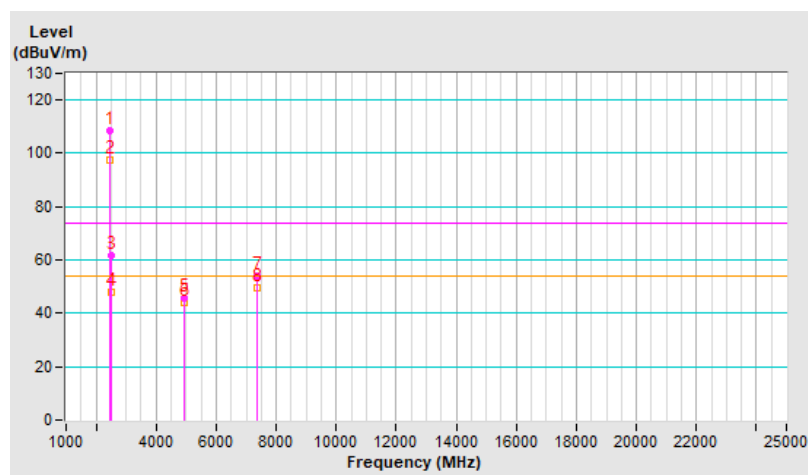


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.5 PK			2.91 H	192	101.0	-3.5
2	*2462.00	86.2 AV			2.91 H	192	89.7	-3.5
3	2483.50	56.1 PK	74.0	-17.9	2.91 H	192	59.5	-3.4
4	2483.50	42.8 AV	54.0	-11.2	2.91 H	192	46.2	-3.4
5	4924.00	47.0 PK	74.0	-27.0	1.01 H	170	45.4	1.6
6	4924.00	45.5 AV	54.0	-8.5	1.01 H	170	43.9	1.6
7	7386.00	53.6 PK	74.0	-20.4	1.12 H	247	45.7	7.9
8	7386.00	50.1 AV	54.0	-3.9	1.12 H	247	42.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

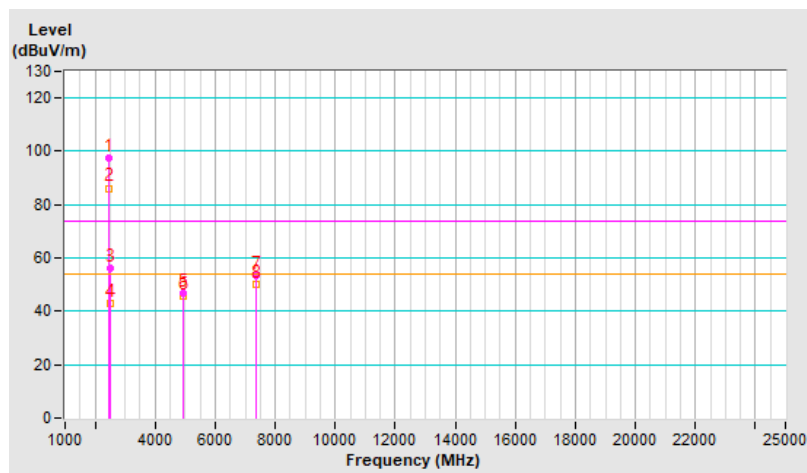


RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.6 PK			1.33 V	295	111.1	-3.5
2	*2462.00	96.5 AV			1.33 V	295	100.0	-3.5
3	2483.50	60.5 PK	74.0	-13.5	1.33 V	295	63.9	-3.4
4	2483.50	48.3 AV	54.0	-5.7	1.33 V	295	51.7	-3.4
5	4924.00	46.0 PK	74.0	-28.0	1.00 V	223	44.4	1.6
6	4924.00	44.1 AV	54.0	-9.9	1.00 V	223	42.5	1.6
7	7386.00	53.7 PK	74.0	-20.3	1.17 V	289	45.8	7.9
8	7386.00	49.4 AV	54.0	-4.6	1.17 V	289	41.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

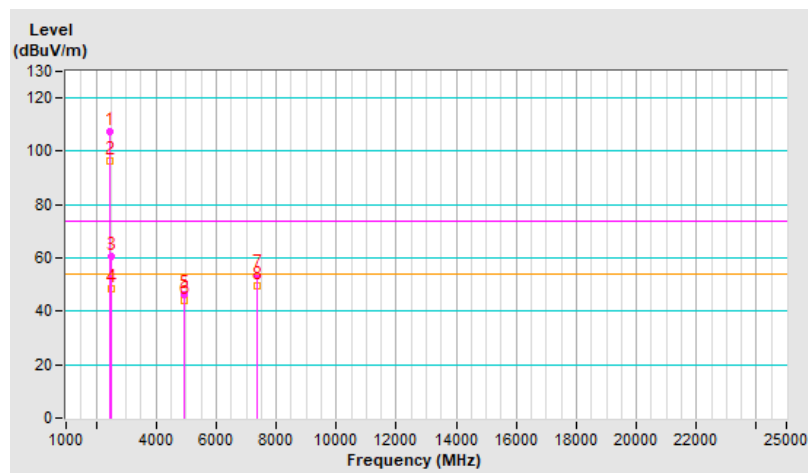


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	2.89 H	185	59.7	-3.6
2	2390.00	42.7 AV	54.0	-11.3	2.89 H	185	46.3	-3.6
3	*2412.00	107.5 PK			2.89 H	185	111.0	-3.5
4	*2412.00	97.5 AV			2.89 H	185	101.0	-3.5
5	4824.00	44.7 PK	74.0	-29.3	1.00 H	343	43.0	1.7
6	4824.00	34.2 AV	54.0	-19.8	1.00 H	343	32.5	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

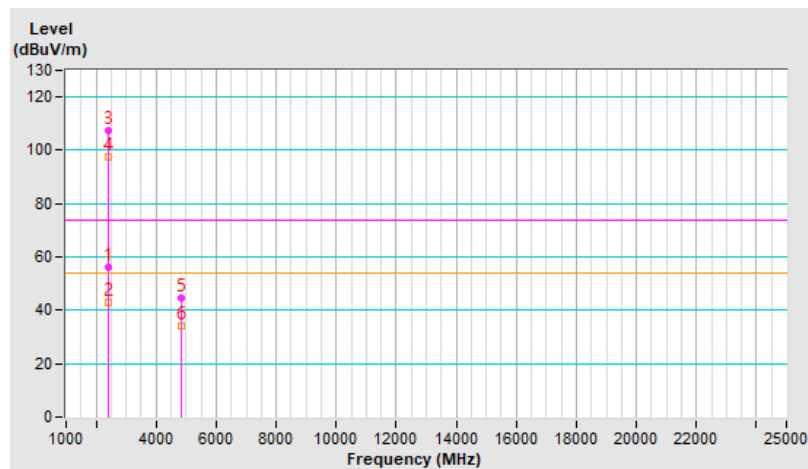


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	1.26 V	299	64.1	-3.6
2	2390.00	46.2 AV	54.0	-7.8	1.26 V	299	49.8	-3.6
3	*2412.00	117.5 PK			1.26 V	299	121.0	-3.5
4	*2412.00	106.1 AV			1.26 V	299	109.6	-3.5
5	4824.00	48.9 PK	74.0	-25.1	1.24 V	37	47.2	1.7
6	4824.00	32.9 AV	54.0	-21.1	1.24 V	37	31.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

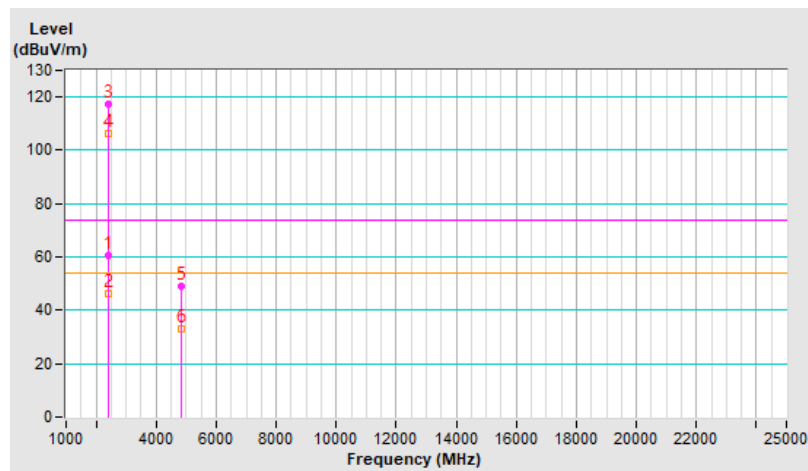


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	2.90 H	199	68.9	-3.6
2	2390.00	44.3 AV	54.0	-9.7	2.90 H	199	47.9	-3.6
3	*2437.00	111.2 PK			2.90 H	199	114.7	-3.5
4	*2437.00	99.5 AV			2.90 H	199	103.0	-3.5
5	2483.50	55.2 PK	74.0	-18.8	2.90 H	199	58.6	-3.4
6	2483.50	42.1 AV	54.0	-11.9	2.90 H	199	45.5	-3.4
7	4874.00	44.7 PK	74.0	-29.3	1.03 H	360	43.2	1.5
8	4874.00	33.7 AV	54.0	-20.3	1.03 H	360	32.2	1.5
9	7311.00	47.6 PK	74.0	-26.4	1.27 H	120	40.0	7.6
10	7311.00	34.9 AV	54.0	-19.1	1.27 H	120	27.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

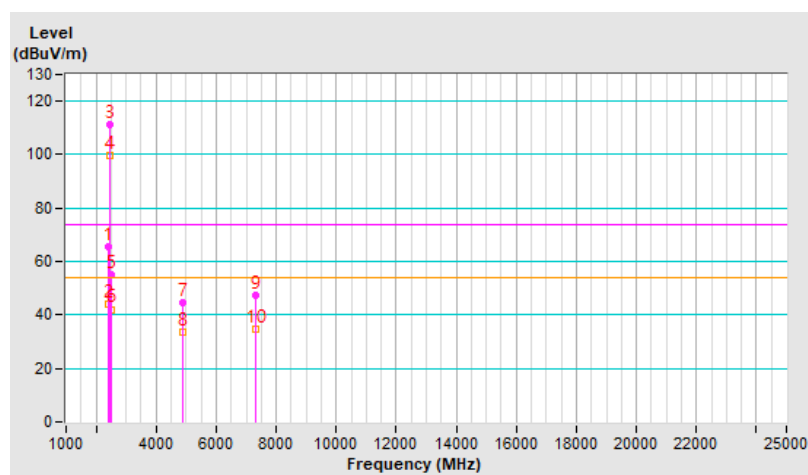


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	1.33 V	294	74.8	-3.6
2	2390.00	45.5 AV	54.0	-8.5	1.33 V	294	49.1	-3.6
3	*2437.00	121.3 PK			1.33 V	294	124.8	-3.5
4	*2437.00	109.8 AV			1.33 V	294	113.3	-3.5
5	2483.50	58.3 PK	74.0	-15.7	1.33 V	294	61.7	-3.4
6	2483.50	43.1 AV	54.0	-10.9	1.33 V	294	46.5	-3.4
7	4874.00	48.9 PK	74.0	-25.1	1.29 V	53	47.4	1.5
8	4874.00	33.0 AV	54.0	-21.0	1.29 V	53	31.5	1.5
9	7311.00	62.3 PK	74.0	-11.7	2.43 V	111	54.7	7.6
10	7311.00	47.5 AV	54.0	-6.5	2.43 V	111	39.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

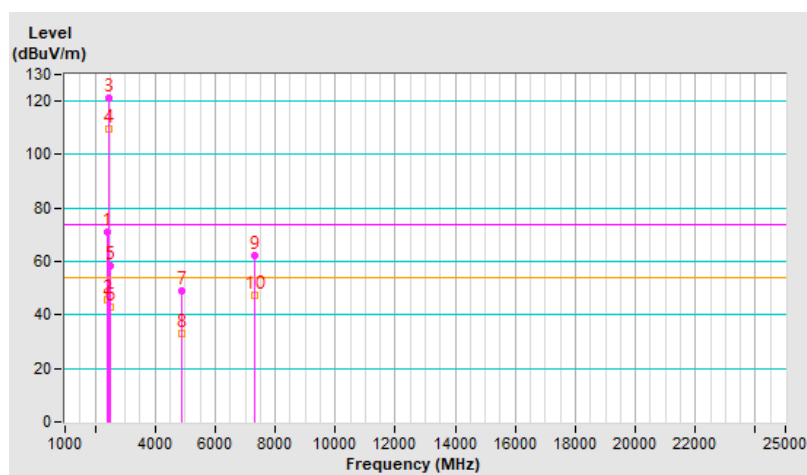


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.1 PK			2.94 H	204	110.6	-3.5
2	*2462.00	96.9 AV			2.94 H	204	100.4	-3.5
3	2483.50	58.3 PK	74.0	-15.7	2.94 H	204	61.7	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.94 H	204	45.7	-3.4
5	4924.00	44.6 PK	74.0	-29.4	1.00 H	359	43.0	1.6
6	4924.00	33.9 AV	54.0	-20.1	1.00 H	359	32.3	1.6
7	7386.00	47.4 PK	74.0	-26.6	1.24 H	109	39.5	7.9
8	7386.00	34.8 AV	54.0	-19.2	1.24 H	109	26.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

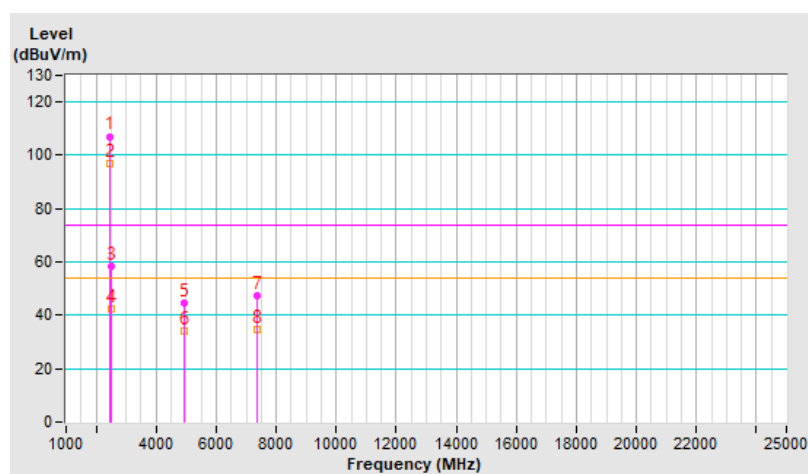


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.1 PK			1.25 V	296	120.6	-3.5
2	*2462.00	106.5 AV			1.25 V	296	110.0	-3.5
3	2483.50	59.0 PK	74.0	-15.0	1.25 V	296	62.4	-3.4
4	2483.50	45.3 AV	54.0	-8.7	1.25 V	296	48.7	-3.4
5	4924.00	49.1 PK	74.0	-24.9	1.29 V	45	47.5	1.6
6	4924.00	32.9 AV	54.0	-21.1	1.29 V	45	31.3	1.6
7	7386.00	61.1 PK	74.0	-12.9	2.45 V	106	53.2	7.9
8	7386.00	46.6 AV	54.0	-7.4	2.45 V	106	38.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

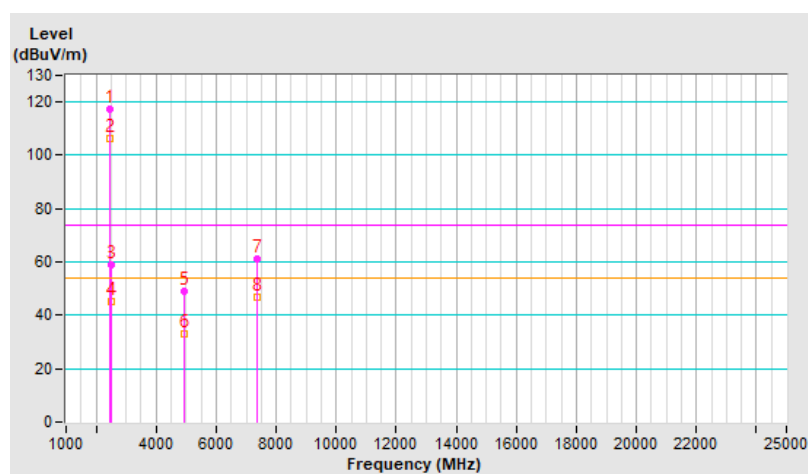


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.2 PK			3.00 H	213	113.6	-3.4
2	*2467.00	98.9 AV			3.00 H	213	102.3	-3.4
3	2483.50	56.3 PK	74.0	-17.7	3.00 H	213	59.7	-3.4
4	2483.50	41.9 AV	54.0	-12.1	3.00 H	213	45.3	-3.4
5	4934.00	44.4 PK	74.0	-29.6	1.02 H	346	42.8	1.6
6	4934.00	33.7 AV	54.0	-20.3	1.02 H	346	32.1	1.6
7	7401.00	47.3 PK	74.0	-26.7	1.21 H	110	39.4	7.9
8	7401.00	34.8 AV	54.0	-19.2	1.21 H	110	26.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

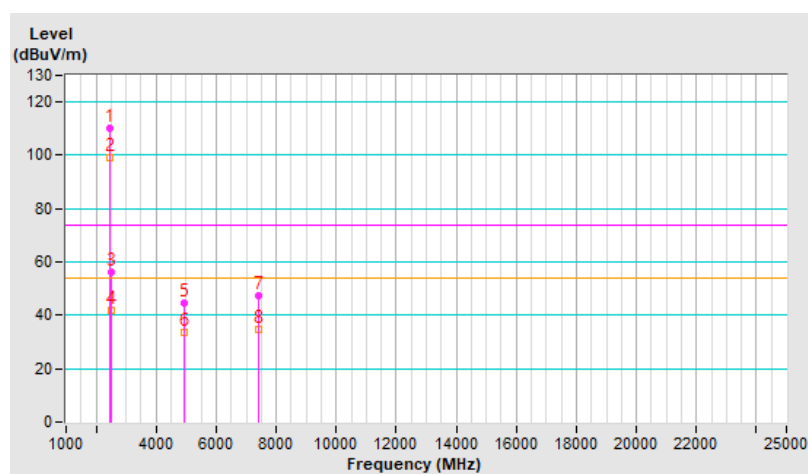


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	119.5 PK			1.27 V	287	122.9	-3.4
2	*2467.00	108.3 AV			1.27 V	287	111.7	-3.4
3	2483.50	59.1 PK	74.0	-14.9	1.27 V	287	62.5	-3.4
4	2483.50	47.5 AV	54.0	-6.5	1.27 V	287	50.9	-3.4
5	4934.00	49.6 PK	74.0	-24.4	1.31 V	37	48.0	1.6
6	4934.00	33.3 AV	54.0	-20.7	1.31 V	37	31.7	1.6
7	7401.00	61.7 PK	74.0	-12.3	2.45 V	116	53.8	7.9
8	7401.00	47.0 AV	54.0	-7.0	2.45 V	116	39.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

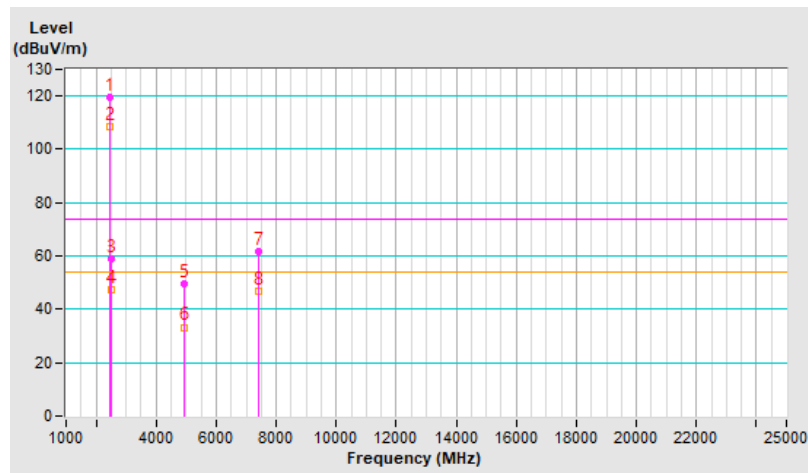


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	103.2 PK			2.97 H	215	106.6	-3.4
2	*2472.00	92.4 AV			2.97 H	215	95.8	-3.4
3	2483.50	54.3 PK	74.0	-19.7	2.97 H	215	57.7	-3.4
4	2483.50	42.4 AV	54.0	-11.6	2.97 H	215	45.8	-3.4
5	4944.00	44.5 PK	74.0	-29.5	1.00 H	339	42.9	1.6
6	4944.00	34.1 AV	54.0	-19.9	1.00 H	339	32.5	1.6
7	7416.00	46.9 PK	74.0	-27.1	1.24 H	132	39.1	7.8
8	7416.00	34.5 AV	54.0	-19.5	1.24 H	132	26.7	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

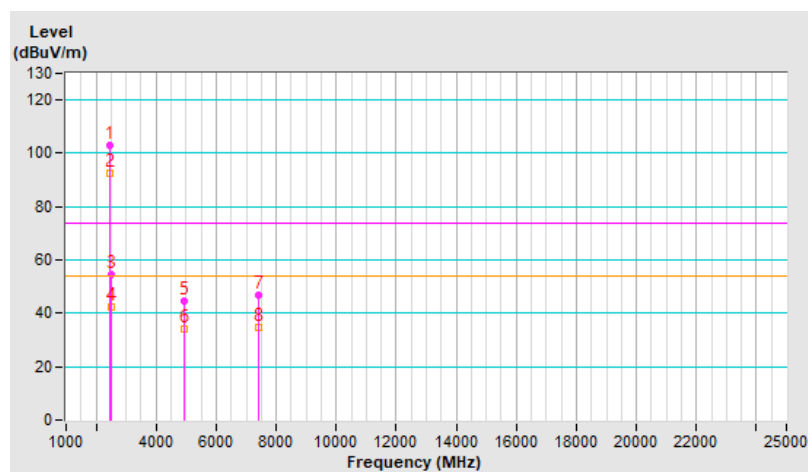


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.5 PK			1.31 V	292	116.9	-3.4
2	*2472.00	101.2 AV			1.31 V	292	104.6	-3.4
3	2483.50	65.8 PK	74.0	-8.2	1.31 V	292	69.2	-3.4
4	2483.50	44.5 AV	54.0	-9.5	1.31 V	292	47.9	-3.4
5	4944.00	48.8 PK	74.0	-25.2	1.33 V	64	47.2	1.6
6	4944.00	32.7 AV	54.0	-21.3	1.33 V	64	31.1	1.6
7	7416.00	61.4 PK	74.0	-12.6	2.45 V	120	53.6	7.8
8	7416.00	46.7 AV	54.0	-7.3	2.45 V	120	38.9	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

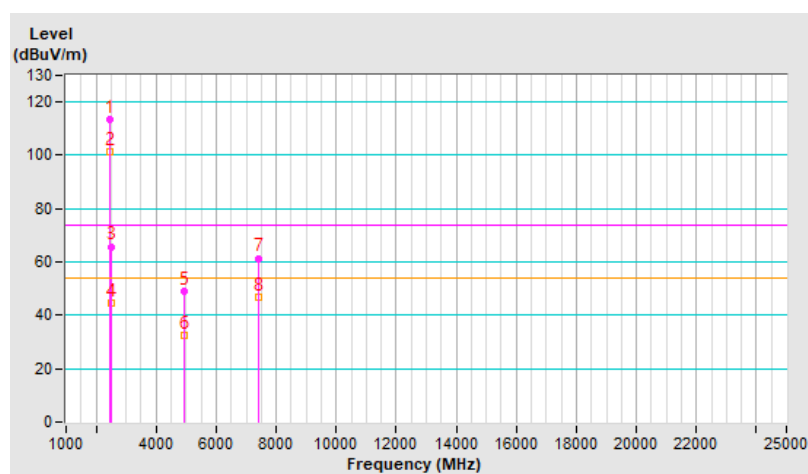


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.7 PK	74.0	-20.3	2.95 H	215	57.3	-3.6
2	2390.00	42.6 AV	54.0	-11.4	2.95 H	215	46.2	-3.6
3	*2412.00	108.5 PK			2.95 H	215	112.0	-3.5
4	*2412.00	96.9 AV			2.95 H	215	100.4	-3.5
5	4824.00	44.2 PK	74.0	-29.8	1.05 H	360	42.5	1.7
6	4824.00	33.7 AV	54.0	-20.3	1.05 H	360	32.0	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

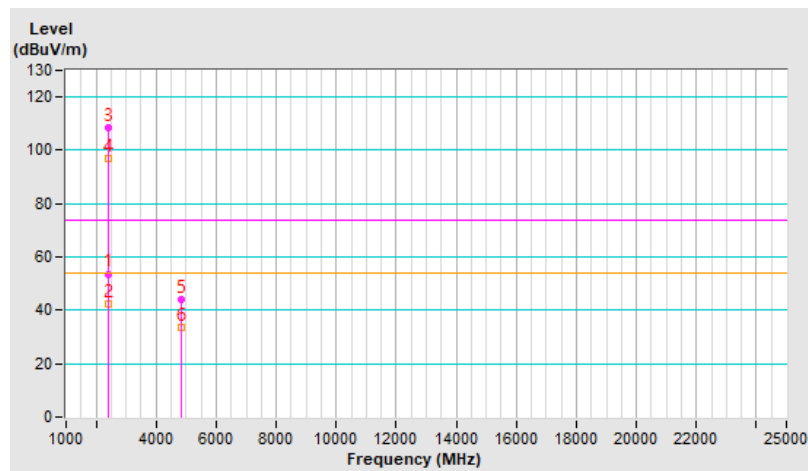


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.31 V	309	66.1	-3.6
2	2390.00	47.2 AV	54.0	-6.8	1.31 V	309	50.8	-3.6
3	*2412.00	117.6 PK			1.31 V	309	121.1	-3.5
4	*2412.00	106.1 AV			1.31 V	309	109.6	-3.5
5	4824.00	49.7 PK	74.0	-24.3	1.23 V	61	48.0	1.7
6	4824.00	33.5 AV	54.0	-20.5	1.23 V	61	31.8	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

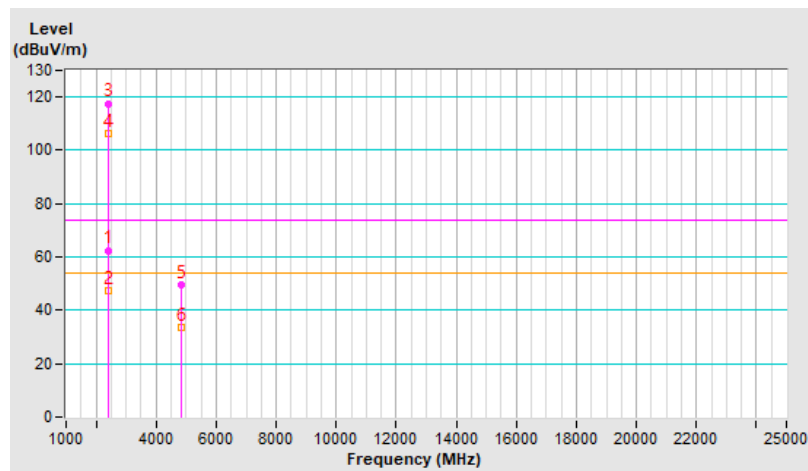


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.2 PK	74.0	-9.8	2.98 H	192	67.8	-3.6
2	2390.00	42.1 AV	54.0	-11.9	2.98 H	192	45.7	-3.6
3	*2437.00	111.0 PK			2.98 H	192	114.5	-3.5
4	*2437.00	100.2 AV			2.98 H	192	103.7	-3.5
5	2483.50	60.1 PK	74.0	-13.9	2.98 H	192	63.5	-3.4
6	2483.50	42.5 AV	54.0	-11.5	2.98 H	192	45.9	-3.4
7	4874.00	43.8 PK	74.0	-30.2	1.00 H	344	42.3	1.5
8	4874.00	33.4 AV	54.0	-20.6	1.00 H	344	31.9	1.5
9	7311.00	46.9 PK	74.0	-27.1	1.21 H	105	39.3	7.6
10	7311.00	34.5 AV	54.0	-19.5	1.21 H	105	26.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

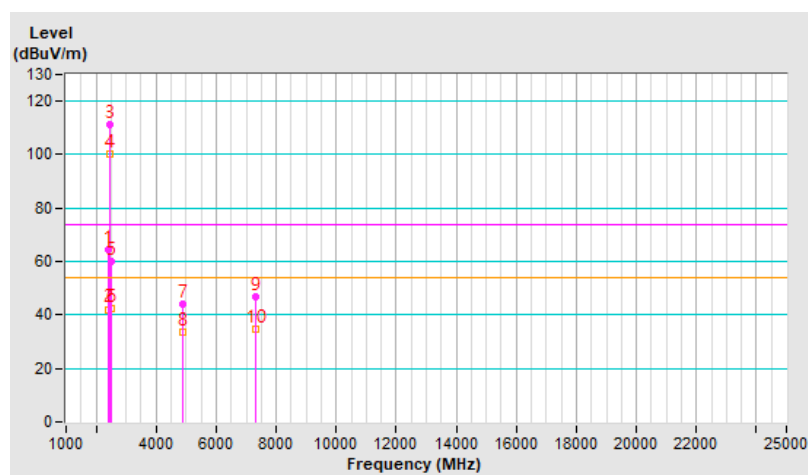


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	1.25 V	294	69.9	-3.6
2	2390.00	43.2 AV	54.0	-10.8	1.25 V	294	46.8	-3.6
3	*2437.00	121.0 PK			1.25 V	294	124.5	-3.5
4	*2437.00	110.3 AV			1.25 V	294	113.8	-3.5
5	2483.50	62.1 PK	74.0	-11.9	1.25 V	294	65.5	-3.4
6	2483.50	43.9 AV	54.0	-10.1	1.25 V	294	47.3	-3.4
7	4874.00	49.2 PK	74.0	-24.8	1.27 V	47	47.7	1.5
8	4874.00	33.1 AV	54.0	-20.9	1.27 V	47	31.6	1.5
9	7311.00	61.7 PK	74.0	-12.3	2.45 V	130	54.1	7.6
10	7311.00	47.3 AV	54.0	-6.7	2.45 V	130	39.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

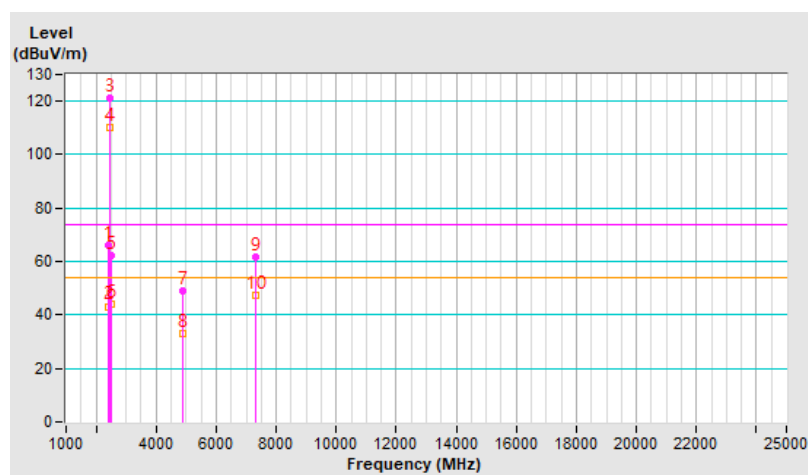


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.8 PK			2.95 H	210	110.3	-3.5
2	*2462.00	96.1 AV			2.95 H	210	99.6	-3.5
3	2483.50	59.5 PK	74.0	-14.5	2.95 H	210	62.9	-3.4
4	2483.50	42.3 AV	54.0	-11.7	2.95 H	210	45.7	-3.4
5	4924.00	43.9 PK	74.0	-30.1	1.01 H	355	42.3	1.6
6	4924.00	33.4 AV	54.0	-20.6	1.01 H	355	31.8	1.6
7	7386.00	47.7 PK	74.0	-26.3	1.18 H	122	39.8	7.9
8	7386.00	35.0 AV	54.0	-19.0	1.18 H	122	27.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

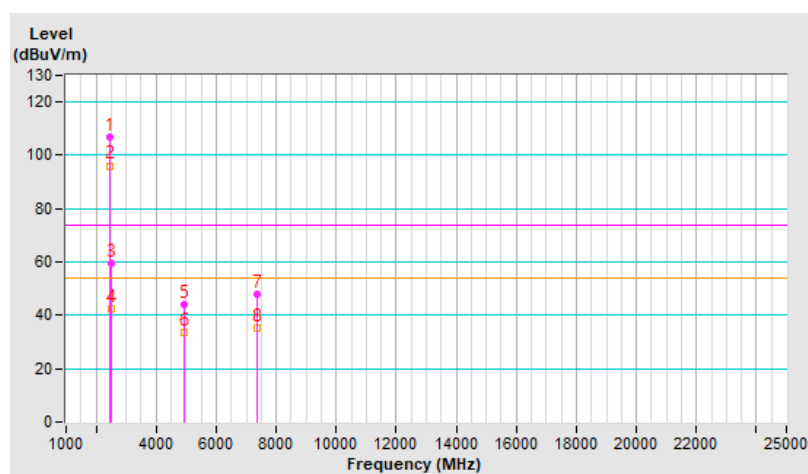


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.3 PK			1.29 V	299	120.8	-3.5
2	*2462.00	106.1 AV			1.29 V	299	109.6	-3.5
3	2483.50	72.1 PK	74.0	-1.9	1.29 V	299	75.5	-3.4
4	2483.50	47.5 AV	54.0	-6.5	1.29 V	299	50.9	-3.4
5	4924.00	49.3 PK	74.0	-24.7	1.31 V	51	47.7	1.6
6	4924.00	33.0 AV	54.0	-21.0	1.31 V	51	31.4	1.6
7	7386.00	61.4 PK	74.0	-12.6	2.39 V	124	53.5	7.9
8	7386.00	46.9 AV	54.0	-7.1	2.39 V	124	39.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

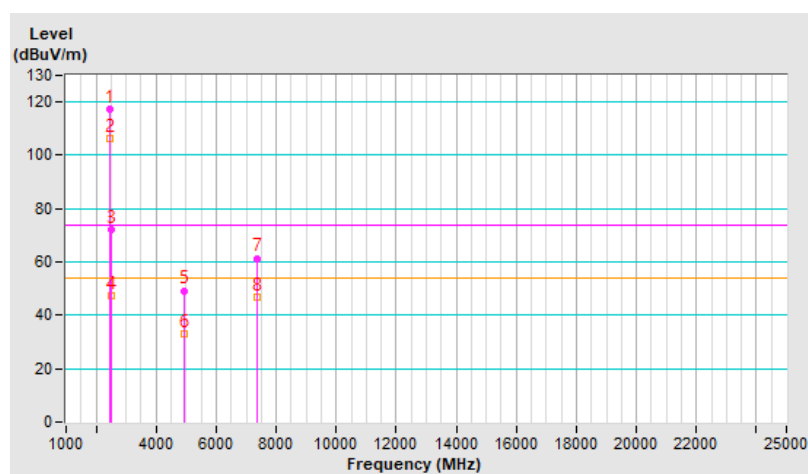


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.5 PK			2.99 H	191	107.9	-3.4
2	*2467.00	93.5 AV			2.99 H	191	96.9	-3.4
3	2483.50	54.3 PK	74.0	-19.7	2.99 H	191	57.7	-3.4
4	2483.50	41.5 AV	54.0	-12.5	2.99 H	191	44.9	-3.4
5	4934.00	44.0 PK	74.0	-30.0	1.06 H	353	42.4	1.6
6	4934.00	33.5 AV	54.0	-20.5	1.06 H	353	31.9	1.6
7	7401.00	47.0 PK	74.0	-27.0	1.25 H	124	39.1	7.9
8	7401.00	34.7 AV	54.0	-19.3	1.25 H	124	26.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

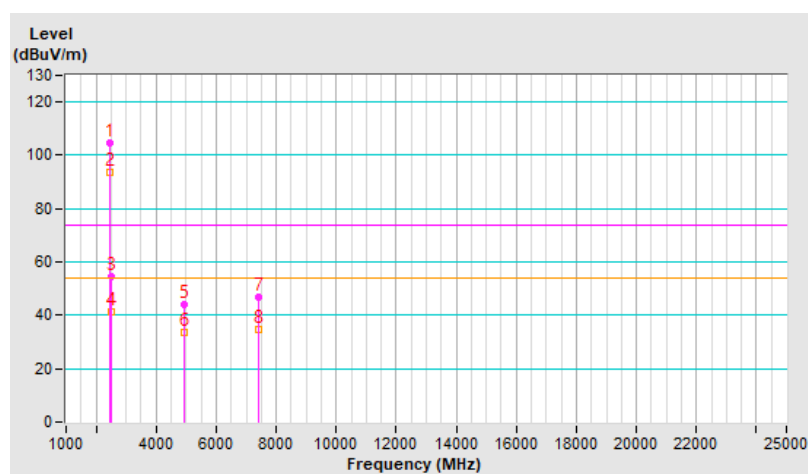


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.2 PK			1.33 V	303	117.6	-3.4
2	*2467.00	102.5 AV			1.33 V	303	105.9	-3.4
3	2483.50	59.7 PK	74.0	-14.3	1.33 V	303	63.1	-3.4
4	2483.50	45.3 AV	54.0	-8.7	1.33 V	303	48.7	-3.4
5	4934.00	49.6 PK	74.0	-24.4	1.34 V	64	48.0	1.6
6	4934.00	33.2 AV	54.0	-20.8	1.34 V	64	31.6	1.6
7	7401.00	61.2 PK	74.0	-12.8	2.41 V	122	53.3	7.9
8	7401.00	46.9 AV	54.0	-7.1	2.41 V	122	39.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

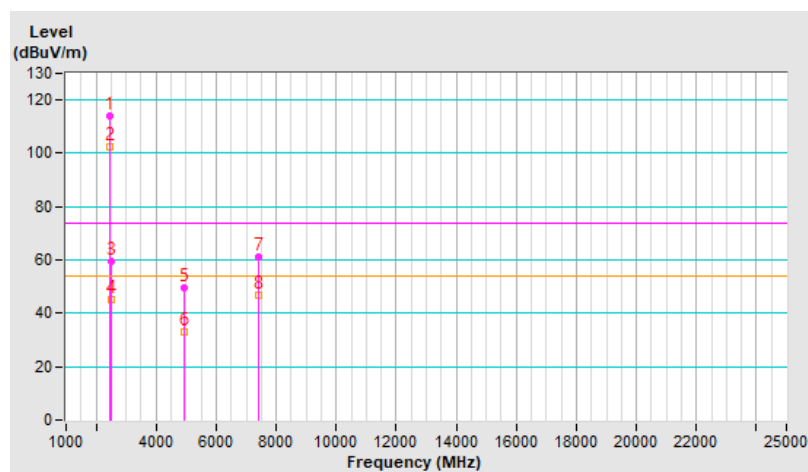


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.5 PK			2.98 H	192	104.9	-3.4
2	*2472.00	89.4 AV			2.98 H	192	92.8	-3.4
3	2483.50	55.8 PK	74.0	-18.2	2.98 H	192	59.2	-3.4
4	2483.50	42.9 AV	54.0	-11.1	2.98 H	192	46.3	-3.4
5	4944.00	44.2 PK	74.0	-29.8	1.01 H	360	42.6	1.6
6	4944.00	33.9 AV	54.0	-20.1	1.01 H	360	32.3	1.6
7	7416.00	47.7 PK	74.0	-26.3	1.21 H	133	39.9	7.8
8	7416.00	35.1 AV	54.0	-18.9	1.21 H	133	27.3	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

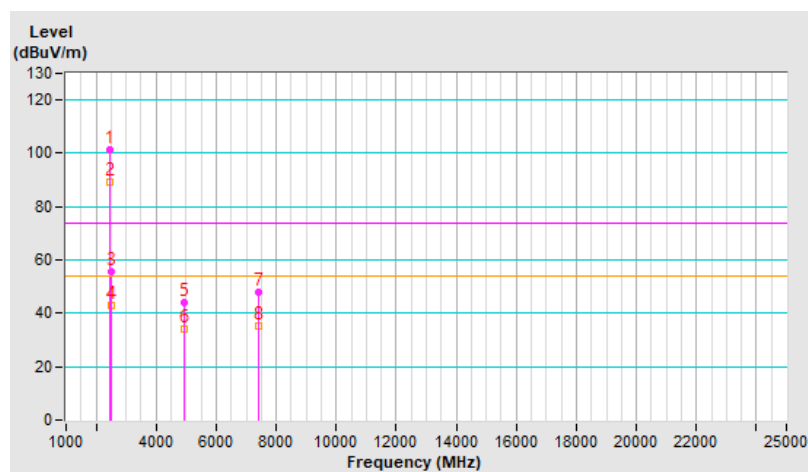


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.9 PK			1.34 V	300	115.3	-3.4
2	*2472.00	100.4 AV			1.34 V	300	103.8	-3.4
3	2483.50	65.3 PK	74.0	-8.7	1.34 V	300	68.7	-3.4
4	2483.50	50.6 AV	54.0	-3.4	1.34 V	300	54.0	-3.4
5	4944.00	49.3 PK	74.0	-24.7	1.33 V	59	47.7	1.6
6	4944.00	33.1 AV	54.0	-20.9	1.33 V	59	31.5	1.6
7	7416.00	61.6 PK	74.0	-12.4	2.44 V	102	53.8	7.8
8	7416.00	47.3 AV	54.0	-6.7	2.44 V	102	39.5	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

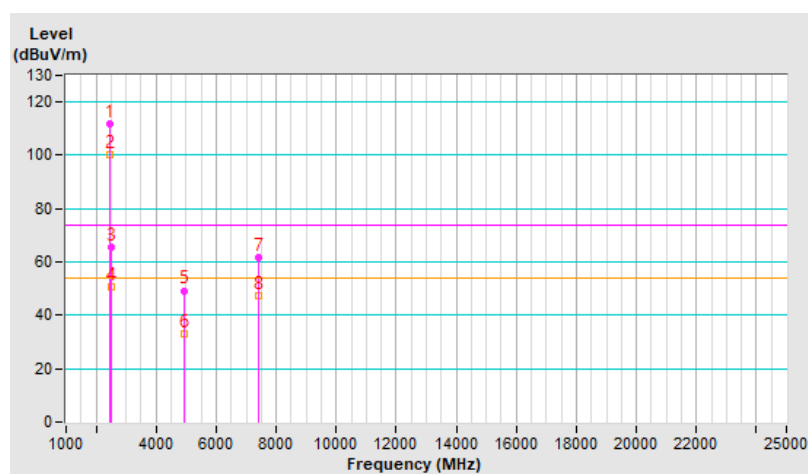


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	2.90 H	192	61.7	-3.6
2	2390.00	42.1 AV	54.0	-11.9	2.90 H	192	45.7	-3.6
3	*2412.00	105.3 PK			2.90 H	192	108.8	-3.5
4	*2412.00	92.6 AV			2.90 H	192	96.1	-3.5
5	4824.00	44.4 PK	74.0	-29.6	1.01 H	353	42.7	1.7
6	4824.00	33.5 AV	54.0	-20.5	1.01 H	353	31.8	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

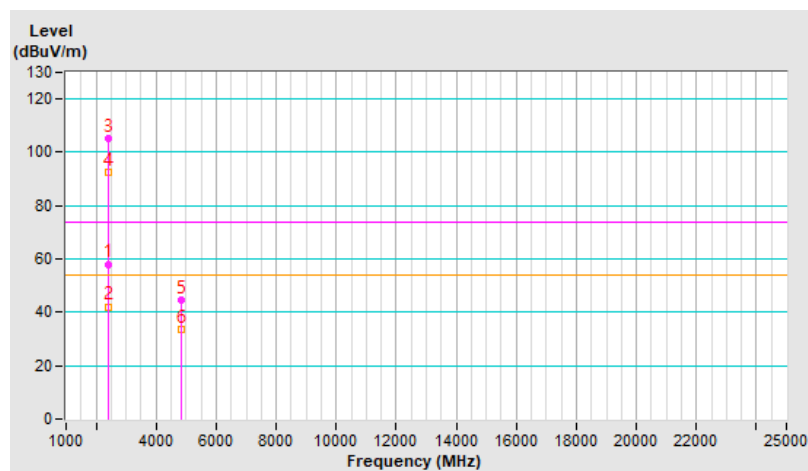


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.3 PK	74.0	-11.7	1.34 V	299	65.9	-3.6
2	2390.00	44.3 AV	54.0	-9.7	1.34 V	299	47.9	-3.6
3	*2412.00	118.2 PK			1.34 V	299	121.7	-3.5
4	*2412.00	105.3 AV			1.34 V	299	108.8	-3.5
5	4824.00	48.9 PK	74.0	-25.1	1.28 V	31	47.2	1.7
6	4824.00	32.9 AV	54.0	-21.1	1.28 V	31	31.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

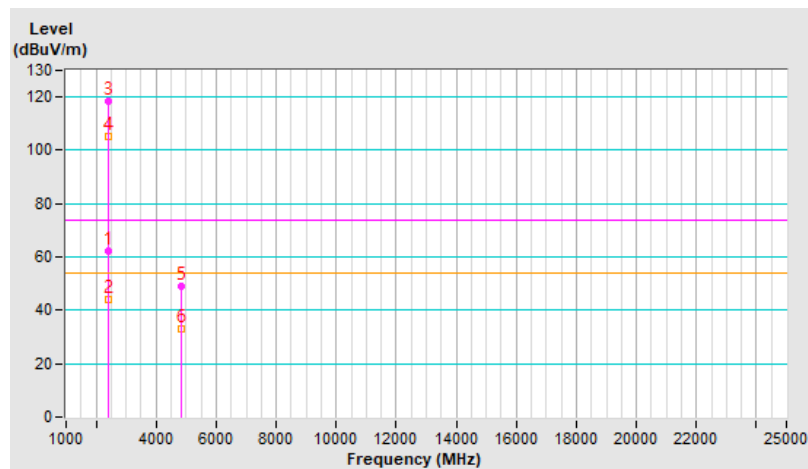


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.6 PK	74.0	-8.4	2.89 H	216	69.2	-3.6
2	2390.00	43.1 AV	54.0	-10.9	2.89 H	216	46.7	-3.6
3	*2437.00	110.2 PK			2.89 H	216	113.7	-3.5
4	*2437.00	100.5 AV			2.89 H	216	104.0	-3.5
5	2483.50	54.3 PK	74.0	-19.7	2.89 H	216	57.7	-3.4
6	2483.50	43.5 AV	54.0	-10.5	2.89 H	216	46.9	-3.4
7	4874.00	45.1 PK	74.0	-28.9	1.04 H	358	43.6	1.5
8	4874.00	34.2 AV	54.0	-19.8	1.04 H	358	32.7	1.5
9	7311.00	46.9 PK	74.0	-27.1	1.18 H	119	39.3	7.6
10	7311.00	34.7 AV	54.0	-19.3	1.18 H	119	27.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

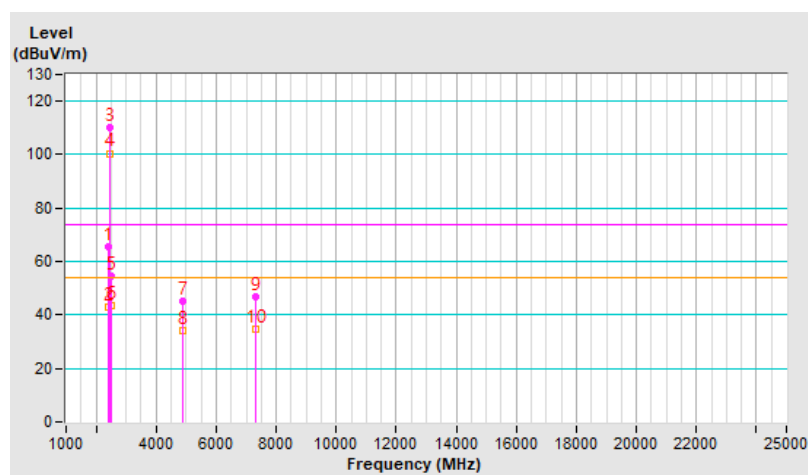


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	1.34 V	297	73.8	-3.6
2	2390.00	44.3 AV	54.0	-9.7	1.34 V	297	47.9	-3.6
3	*2437.00	120.1 PK			1.34 V	297	123.6	-3.5
4	*2437.00	108.6 AV			1.34 V	297	112.1	-3.5
5	2483.50	59.6 PK	74.0	-14.4	1.34 V	297	63.0	-3.4
6	2483.50	44.5 AV	54.0	-9.5	1.34 V	297	47.9	-3.4
7	4874.00	49.2 PK	74.0	-24.8	1.37 V	37	47.7	1.5
8	4874.00	33.2 AV	54.0	-20.8	1.37 V	37	31.7	1.5
9	7311.00	62.1 PK	74.0	-11.9	2.43 V	117	54.5	7.6
10	7311.00	47.3 AV	54.0	-6.7	2.43 V	117	39.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

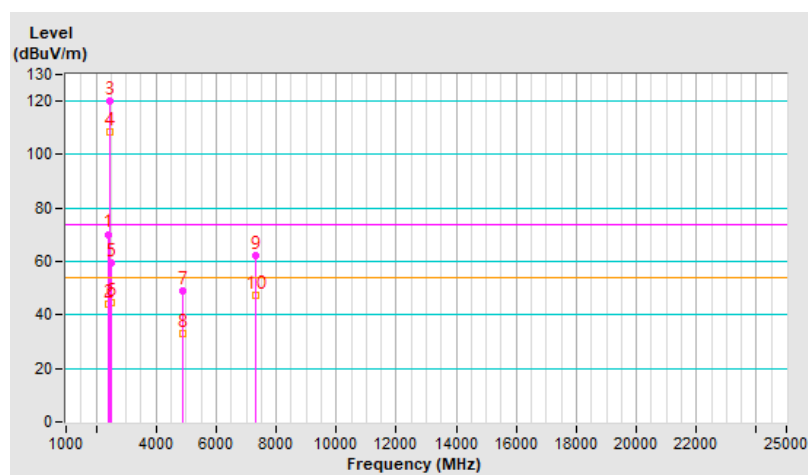


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.1 PK			2.88 H	192	106.6	-3.5
2	*2462.00	90.8 AV			2.88 H	192	94.3	-3.5
3	2483.50	54.1 PK	74.0	-19.9	2.88 H	192	57.5	-3.4
4	2483.50	42.5 AV	54.0	-11.5	2.88 H	192	45.9	-3.4
5	4924.00	43.9 PK	74.0	-30.1	1.00 H	354	42.3	1.6
6	4924.00	33.6 AV	54.0	-20.4	1.00 H	354	32.0	1.6
7	7386.00	47.9 PK	74.0	-26.1	1.19 H	130	40.0	7.9
8	7386.00	35.2 AV	54.0	-18.8	1.19 H	130	27.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

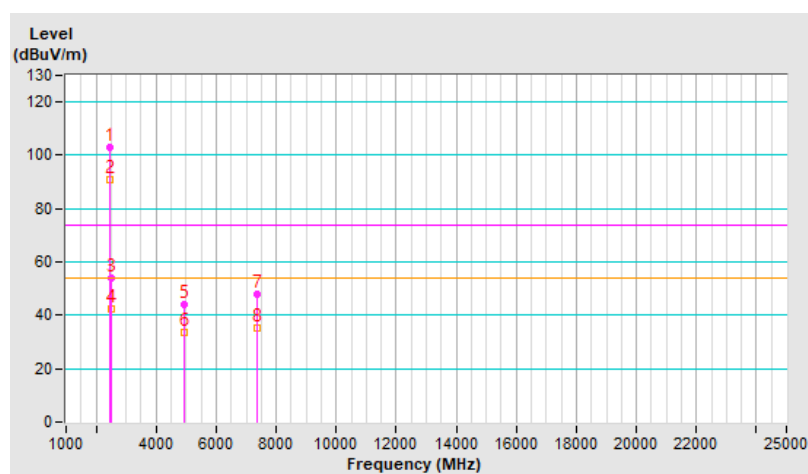


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.5 PK			1.26 V	284	120.0	-3.5
2	*2462.00	103.8 AV			1.26 V	284	107.3	-3.5
3	2483.50	61.2 PK	74.0	-12.8	1.26 V	284	64.6	-3.4
4	2483.50	45.3 AV	54.0	-8.7	1.26 V	284	48.7	-3.4
5	4924.00	49.5 PK	74.0	-24.5	1.31 V	36	47.9	1.6
6	4924.00	33.0 AV	54.0	-21.0	1.31 V	36	31.4	1.6
7	7386.00	61.6 PK	74.0	-12.4	2.41 V	110	53.7	7.9
8	7386.00	46.7 AV	54.0	-7.3	2.41 V	110	38.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

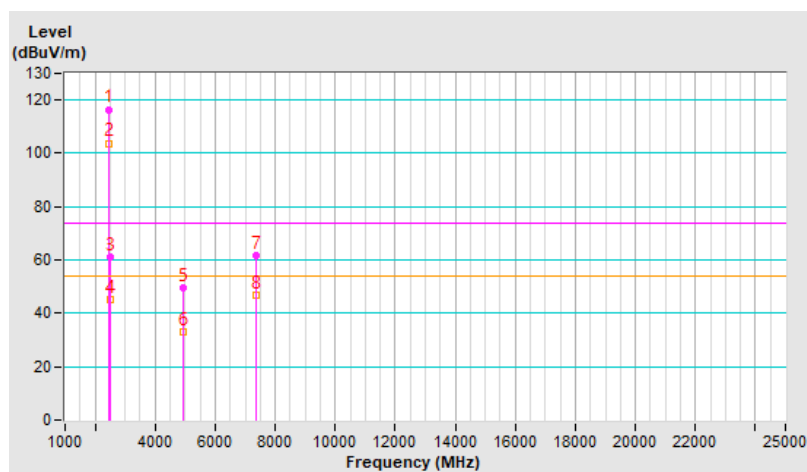


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	100.9 PK			2.89 H	217	104.3	-3.4
2	*2467.00	90.5 AV			2.89 H	217	93.9	-3.4
3	2483.50	55.1 PK	74.0	-18.9	2.89 H	217	58.5	-3.4
4	2483.50	42.6 AV	54.0	-11.4	2.89 H	217	46.0	-3.4
5	4934.00	43.7 PK	74.0	-30.3	1.00 H	358	42.1	1.6
6	4934.00	33.4 AV	54.0	-20.6	1.00 H	358	31.8	1.6
7	7401.00	47.2 PK	74.0	-26.8	1.26 H	127	39.3	7.9
8	7401.00	34.9 AV	54.0	-19.1	1.26 H	127	27.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

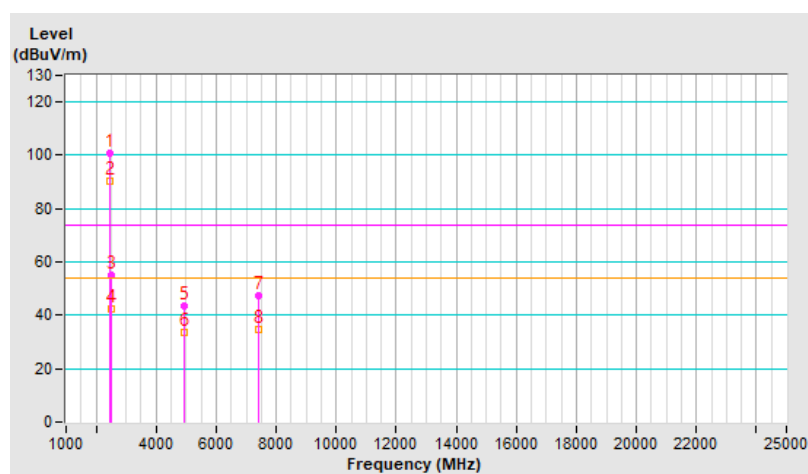


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.5 PK			1.27 V	287	117.9	-3.4
2	*2467.00	103.1 AV			1.27 V	287	106.5	-3.4
3	2483.50	64.3 PK	74.0	-9.7	1.27 V	287	67.7	-3.4
4	2483.50	48.3 AV	54.0	-5.7	1.27 V	287	51.7	-3.4
5	4934.00	49.5 PK	74.0	-24.5	1.37 V	50	47.9	1.6
6	4934.00	33.4 AV	54.0	-20.6	1.37 V	50	31.8	1.6
7	7401.00	61.6 PK	74.0	-12.4	2.42 V	125	53.7	7.9
8	7401.00	46.8 AV	54.0	-7.2	2.42 V	125	38.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

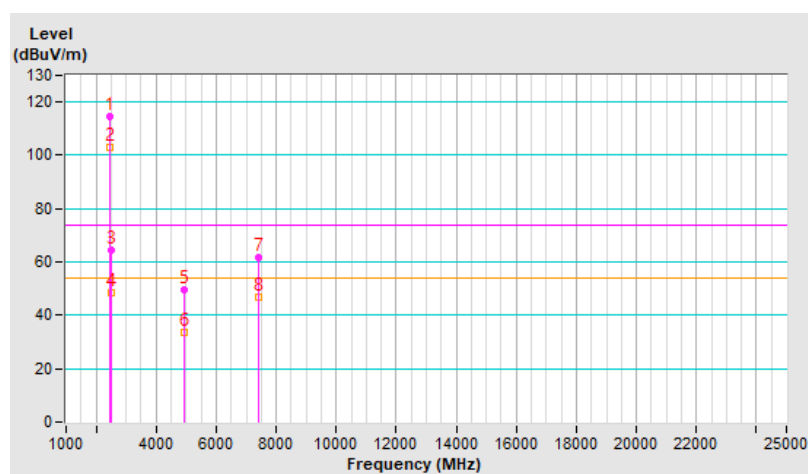


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.1 PK			2.94 H	217	105.5	-3.4
2	*2472.00	88.9 AV			2.94 H	217	92.3	-3.4
3	2483.50	57.1 PK	74.0	-16.9	2.94 H	217	60.5	-3.4
4	2483.50	43.5 AV	54.0	-10.5	2.94 H	217	46.9	-3.4
5	4944.00	44.1 PK	74.0	-29.9	1.01 H	339	42.5	1.6
6	4944.00	33.4 AV	54.0	-20.6	1.01 H	339	31.8	1.6
7	7416.00	47.4 PK	74.0	-26.6	1.16 H	128	39.6	7.8
8	7416.00	34.9 AV	54.0	-19.1	1.16 H	128	27.1	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

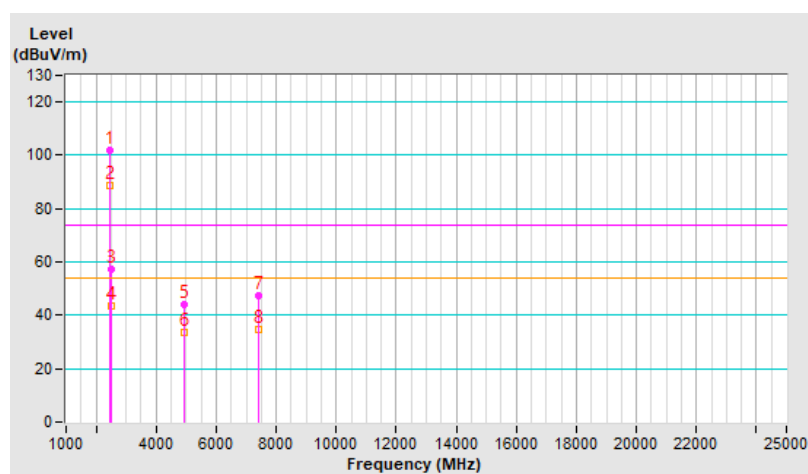


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 66 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.5 PK			1.27 V	284	116.9	-3.4
2	*2472.00	101.8 AV			1.27 V	284	105.2	-3.4
3	2483.50	65.3 PK	74.0	-8.7	1.27 V	284	68.7	-3.4
4	2483.50	49.8 AV	54.0	-4.2	1.27 V	284	53.2	-3.4
5	4944.00	49.6 PK	74.0	-24.4	1.32 V	44	48.0	1.6
6	4944.00	33.3 AV	54.0	-20.7	1.32 V	44	31.7	1.6
7	7416.00	62.0 PK	74.0	-12.0	2.42 V	100	54.2	7.8
8	7416.00	47.2 AV	54.0	-6.8	2.42 V	100	39.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

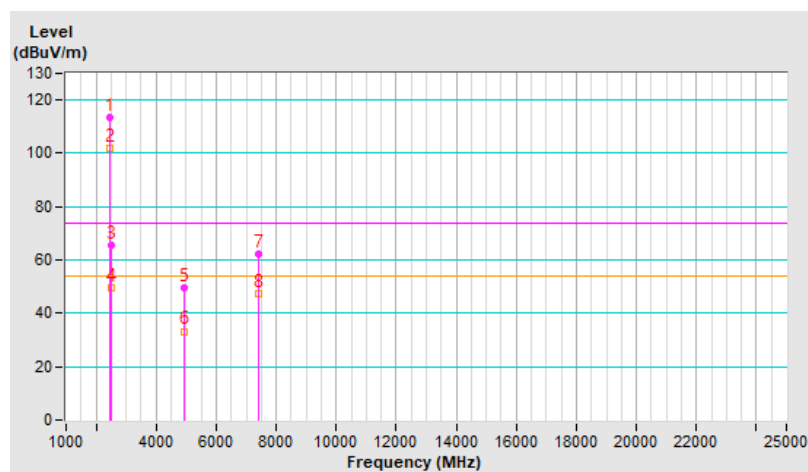


Plot of Band Edge


Mode B

1Tx


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

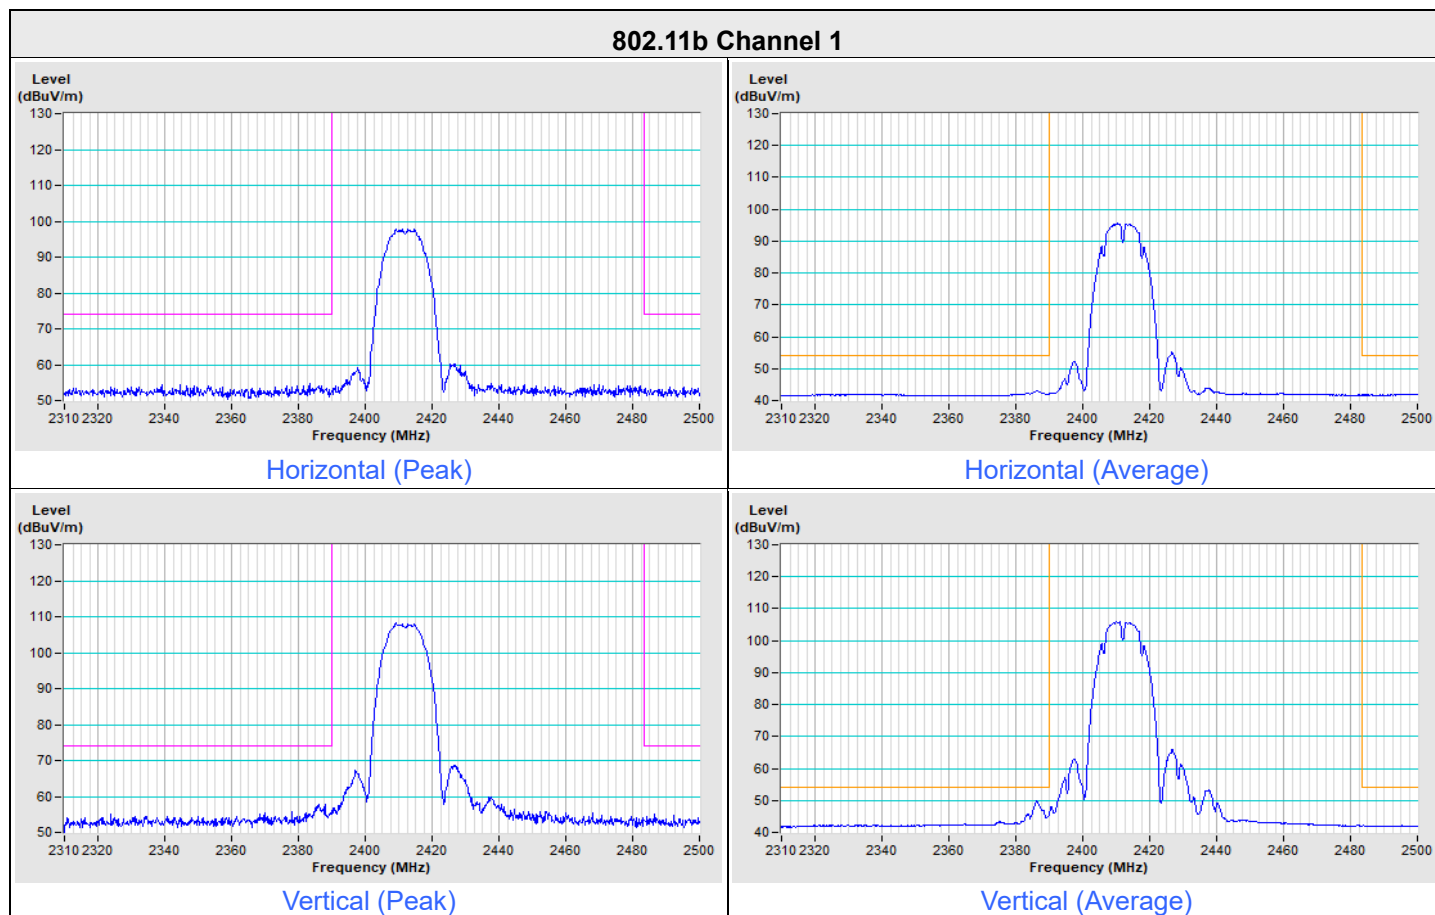


802.11b Channel 11

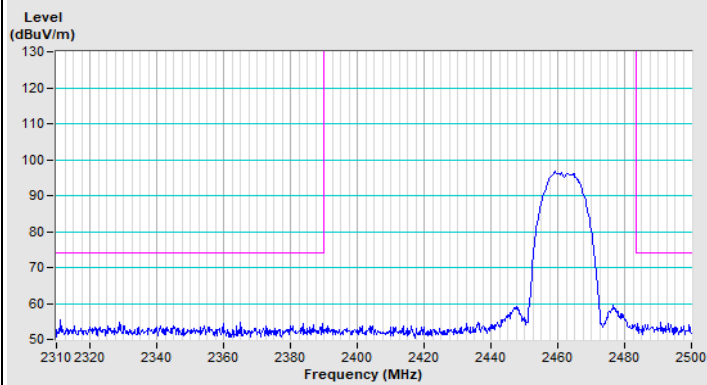


Horizontal (Peak)

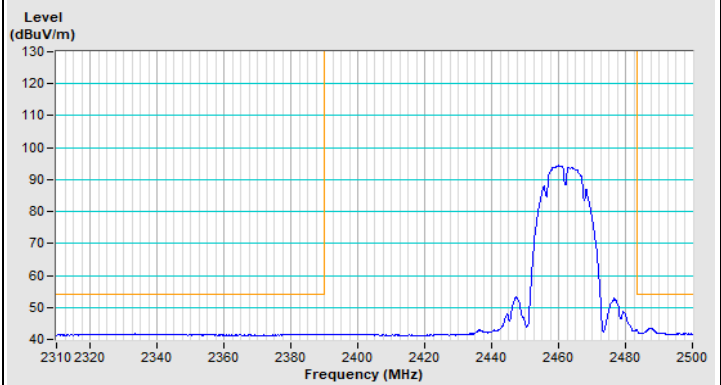

Horizontal (Average)

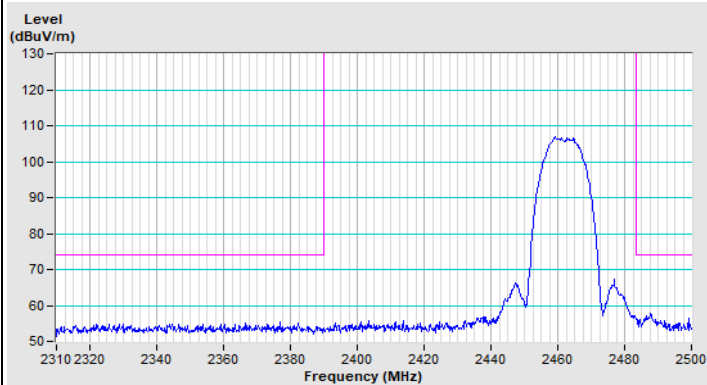


Vertical (Peak)

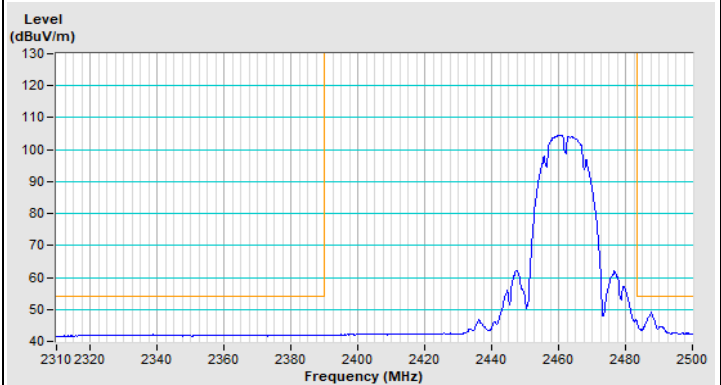


Vertical (Average)


802.11b Channel 12

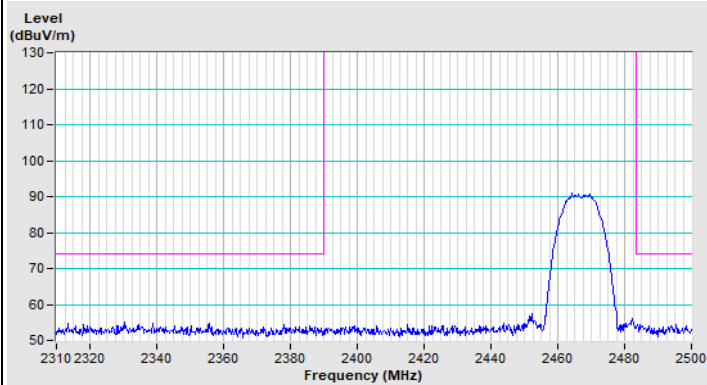


Horizontal (Peak)

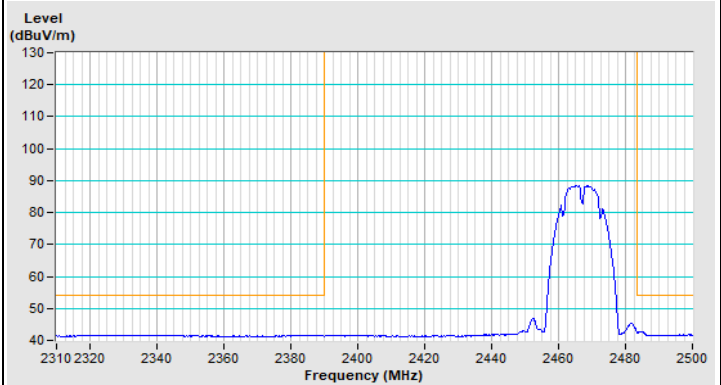


Horizontal (Average)

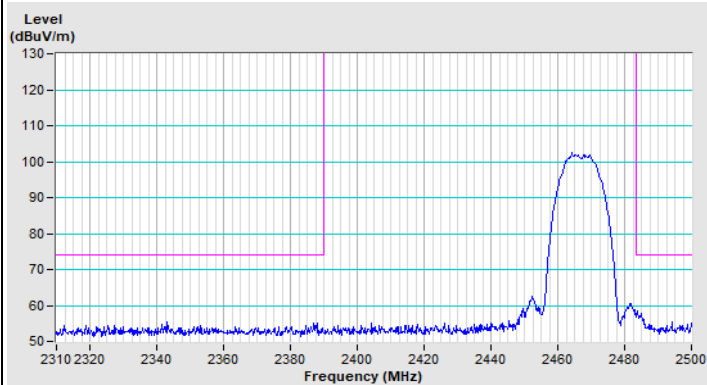


Vertical (Peak)

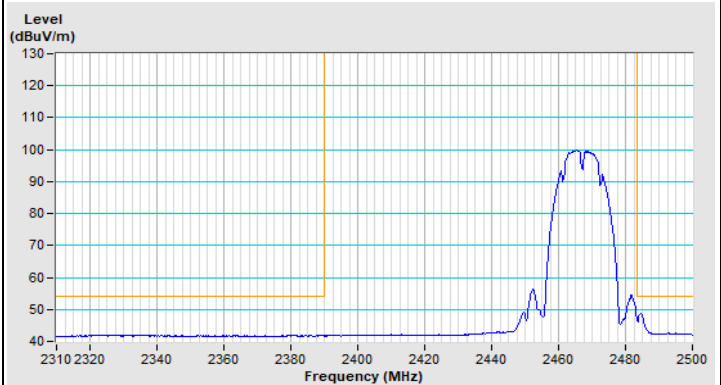


Vertical (Average)

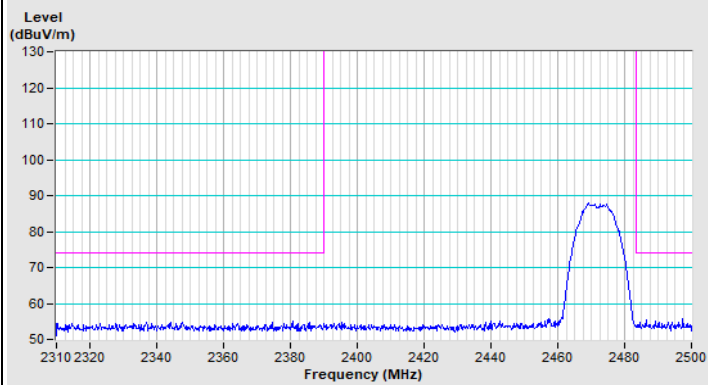802.11b Channel 13


Horizontal (Peak)

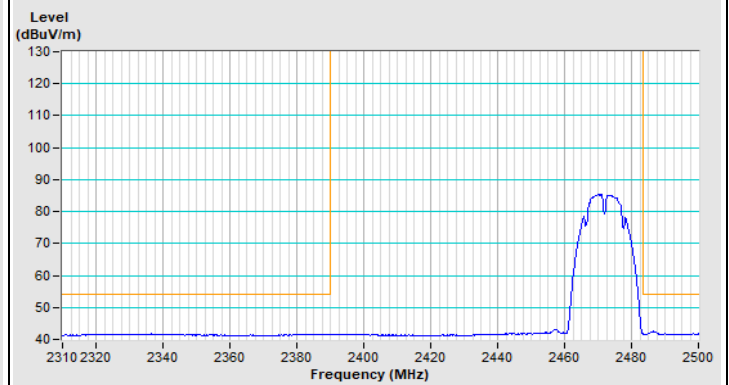

Horizontal (Average)

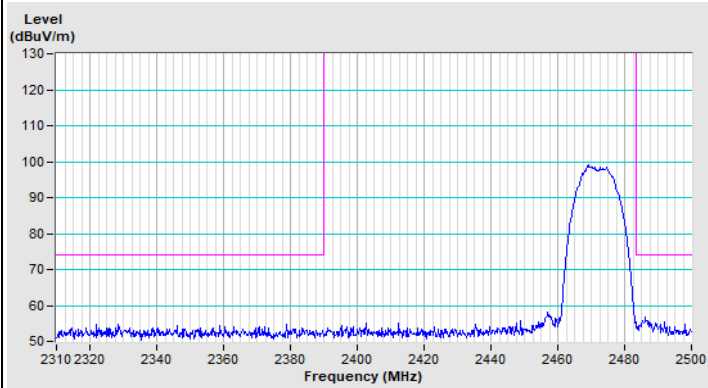


Vertical (Peak)

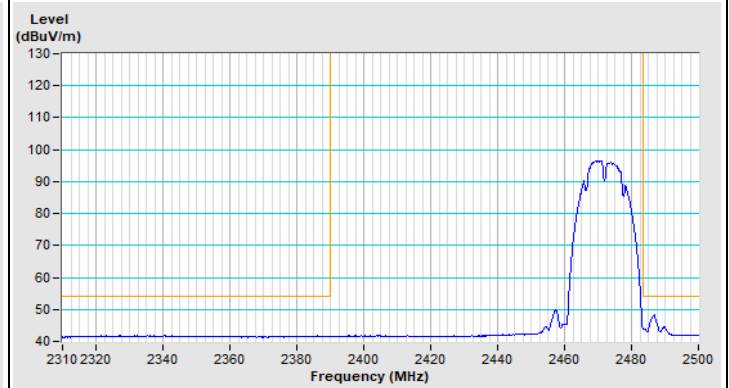


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11g Channel 1

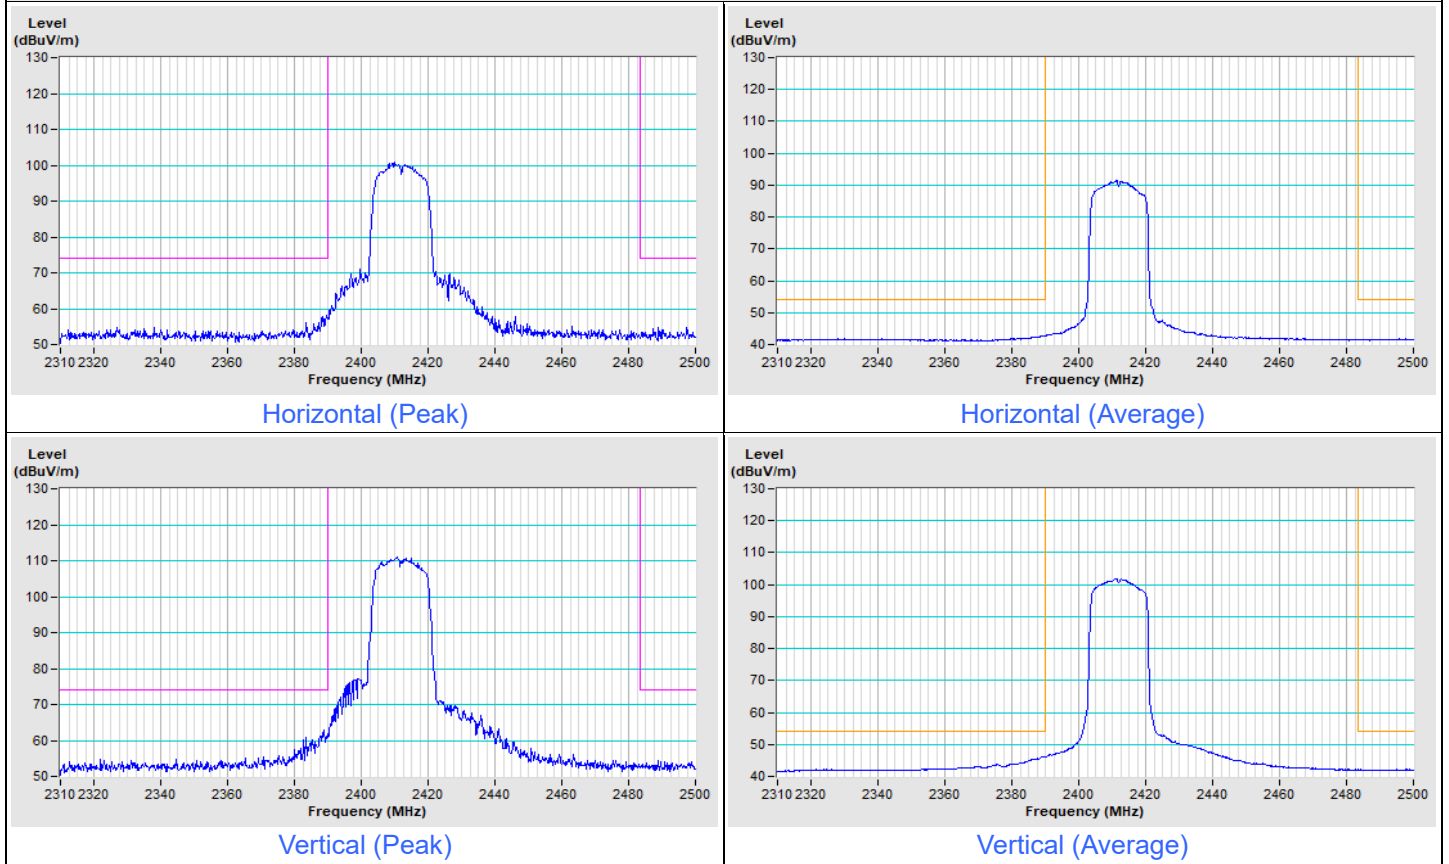


802.11g Channel 11

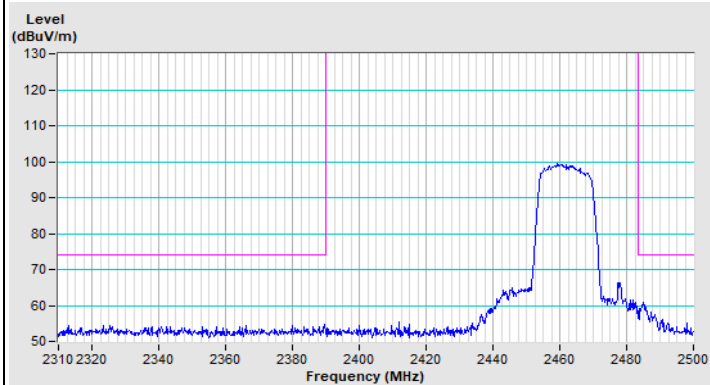


Horizontal (Peak)

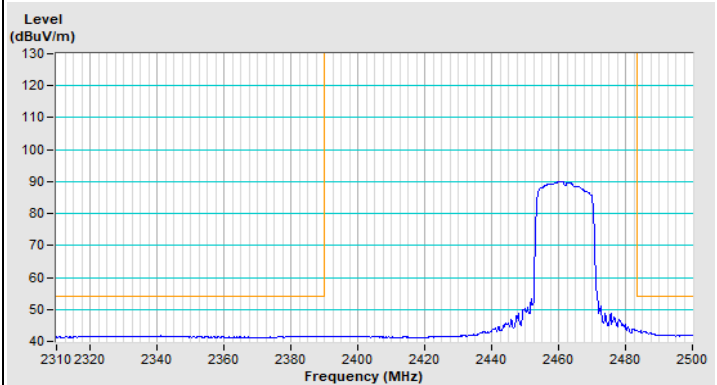

Horizontal (Average)

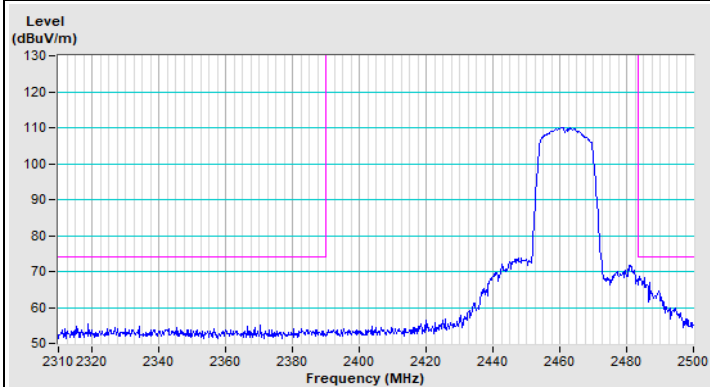


Vertical (Peak)

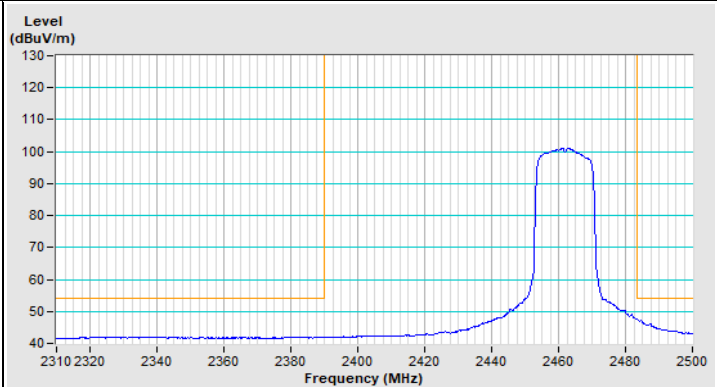


Vertical (Average)


802.11g Channel 12

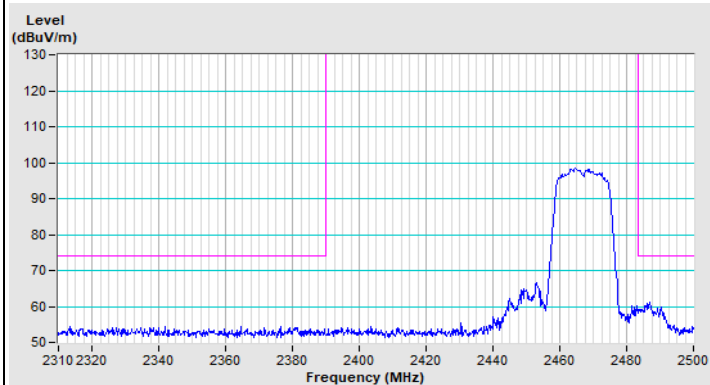


Horizontal (Peak)

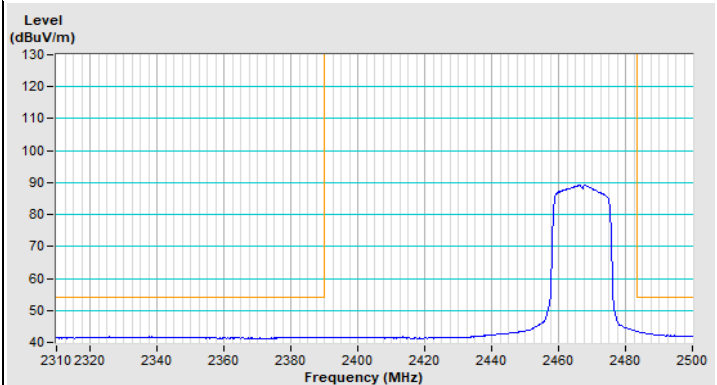

Horizontal (Average)

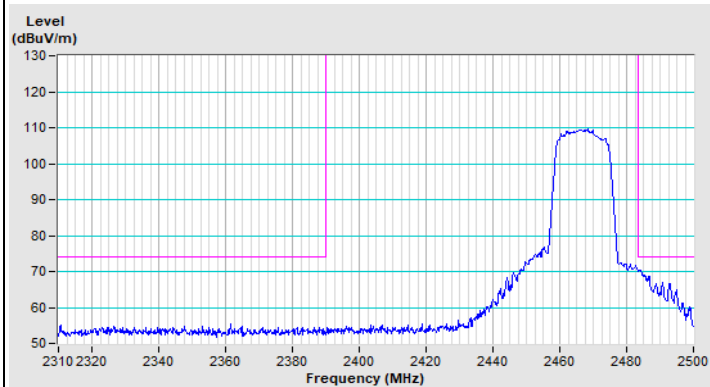


Vertical (Peak)

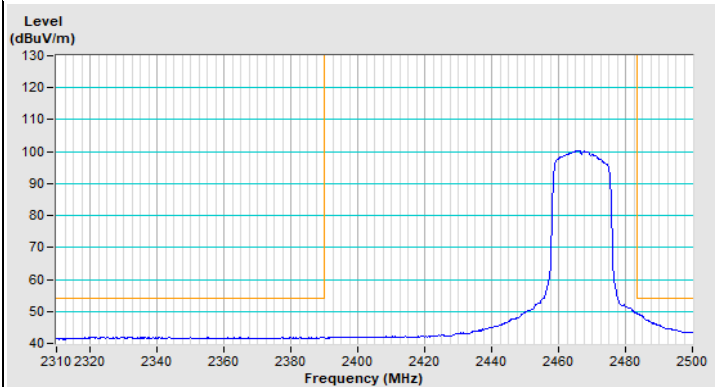


Vertical (Average)


802.11g Channel 13

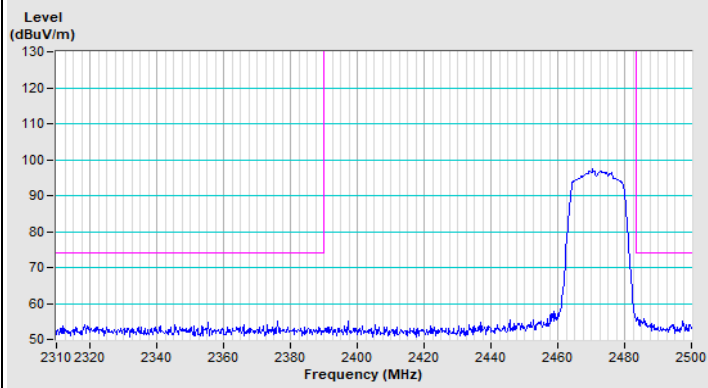


Horizontal (Peak)

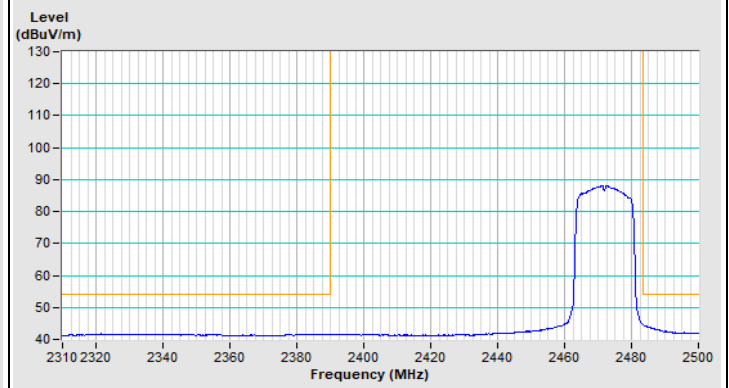

Horizontal (Average)

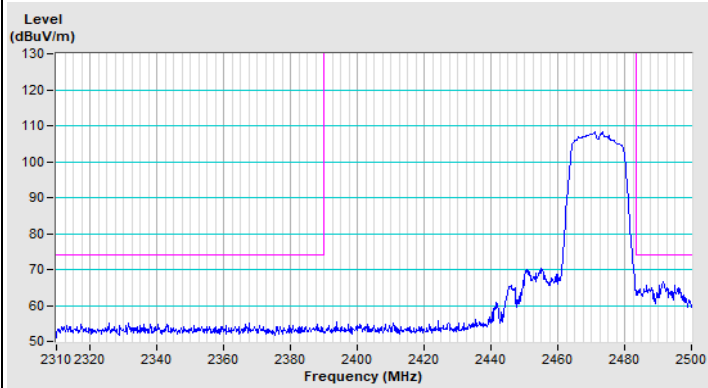


Vertical (Peak)

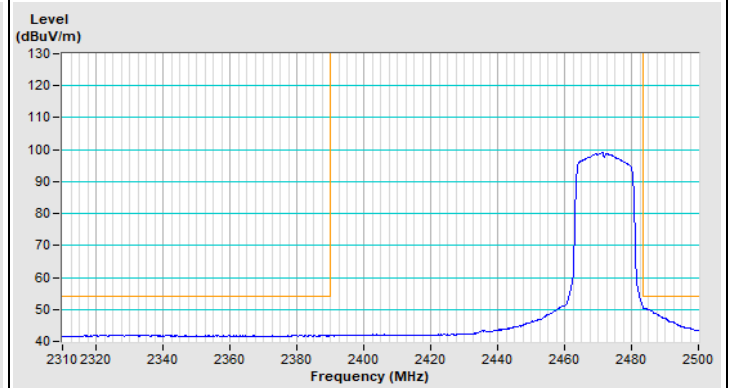





Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) Channel 1

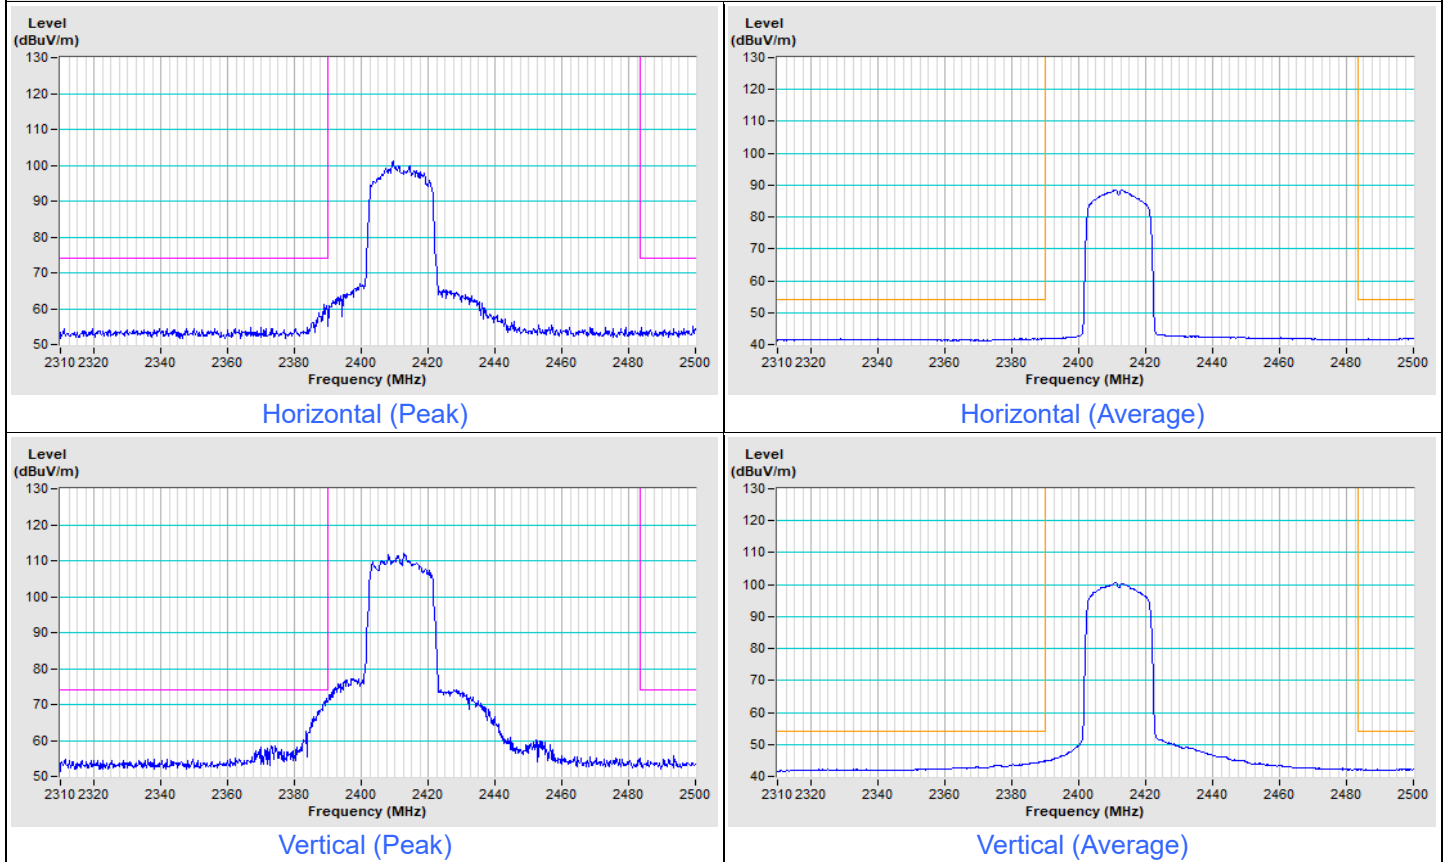


802.11be (EHT20) Channel 11

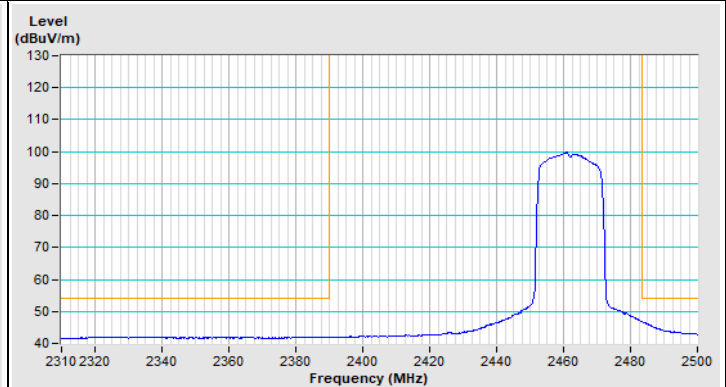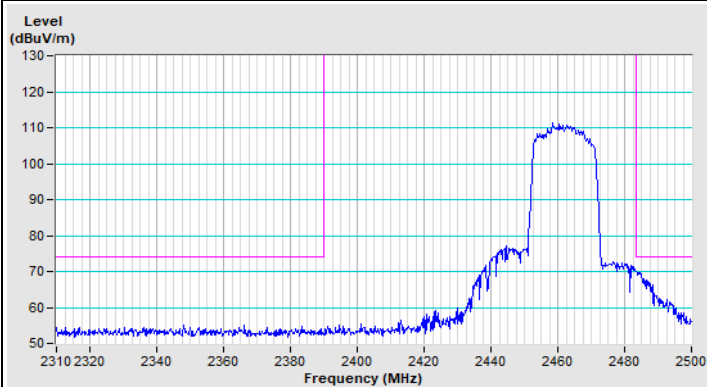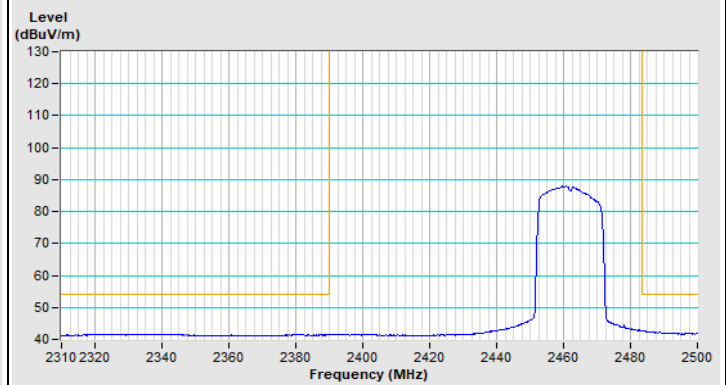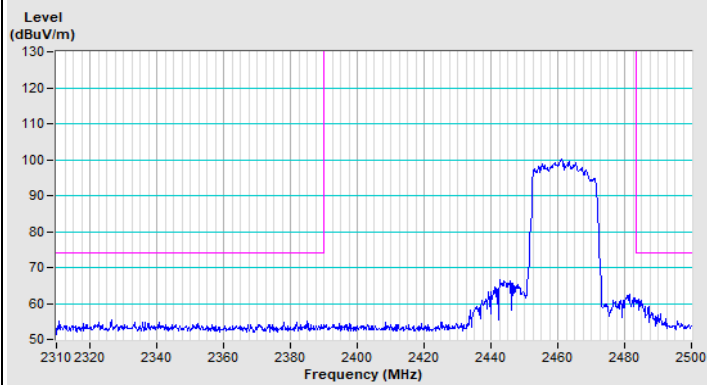


802.11be (EHT20) Channel 12

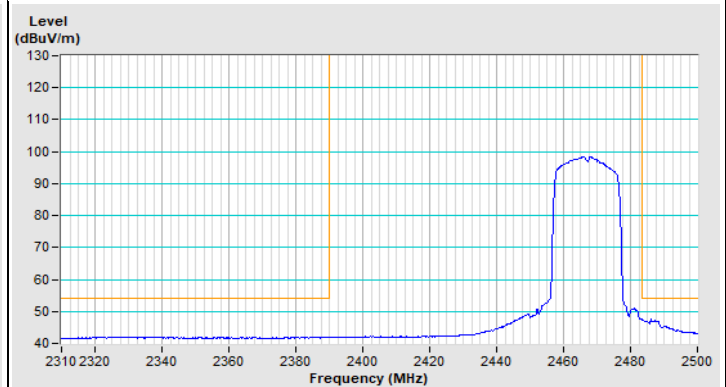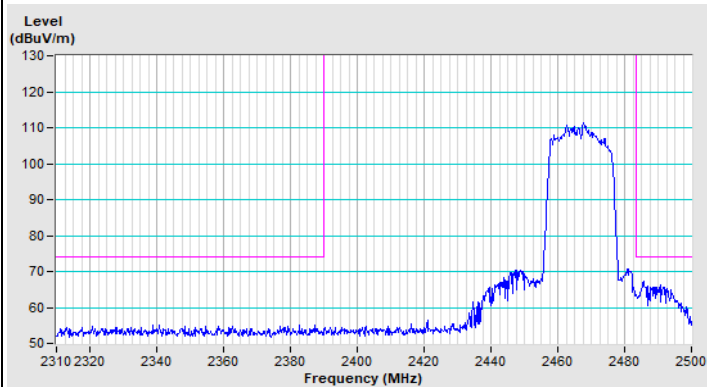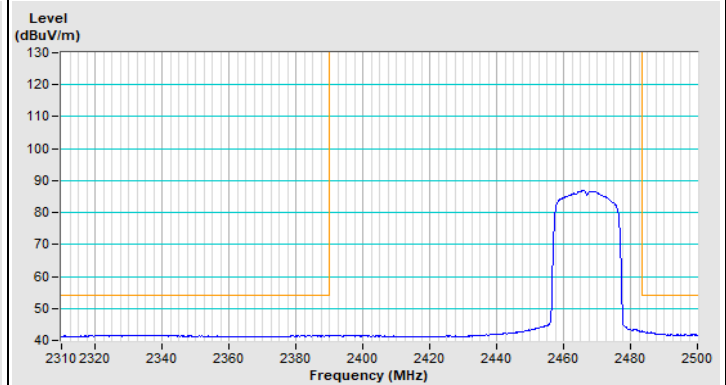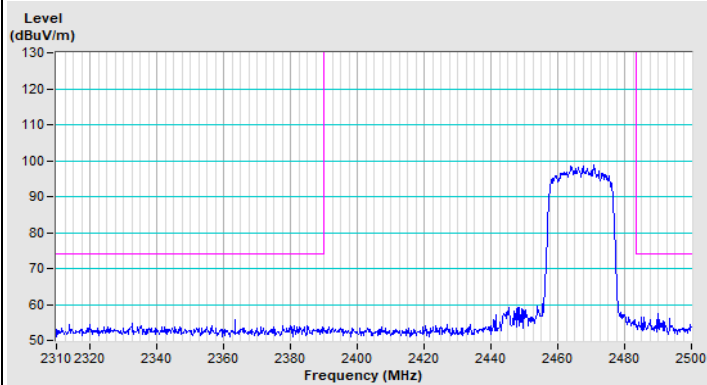


802.11be (EHT20) Channel 13

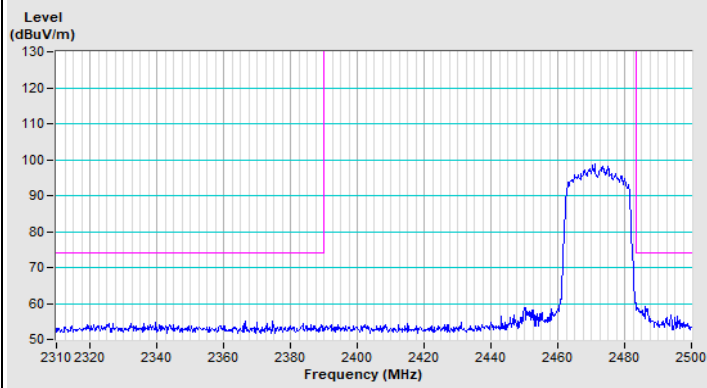


Horizontal (Peak)

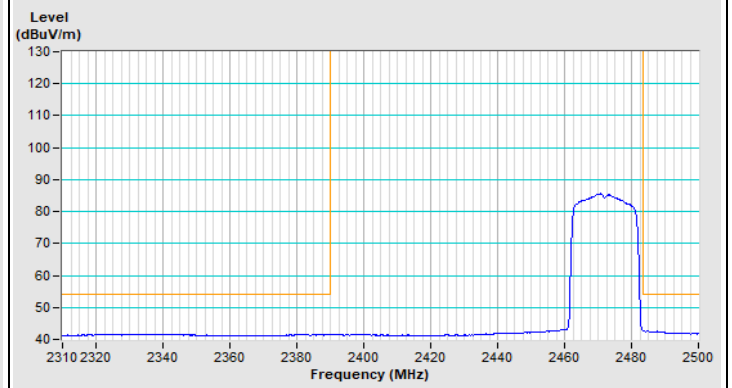

Horizontal (Average)

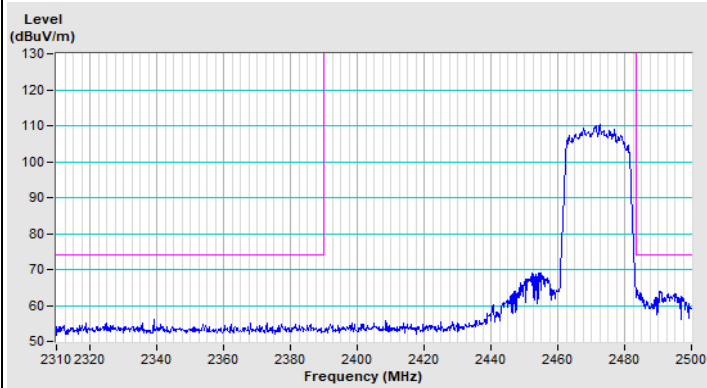


Vertical (Peak)

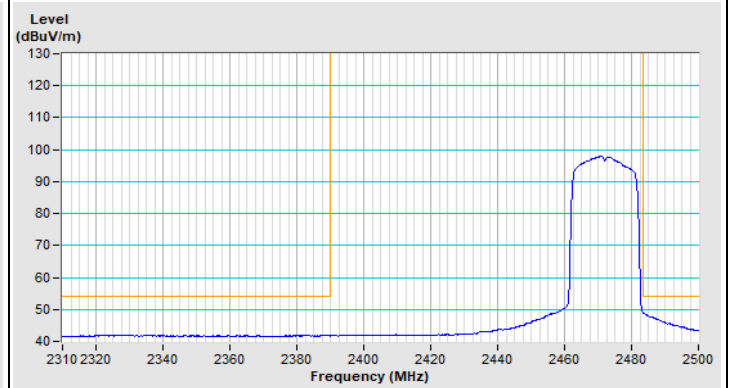


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 3

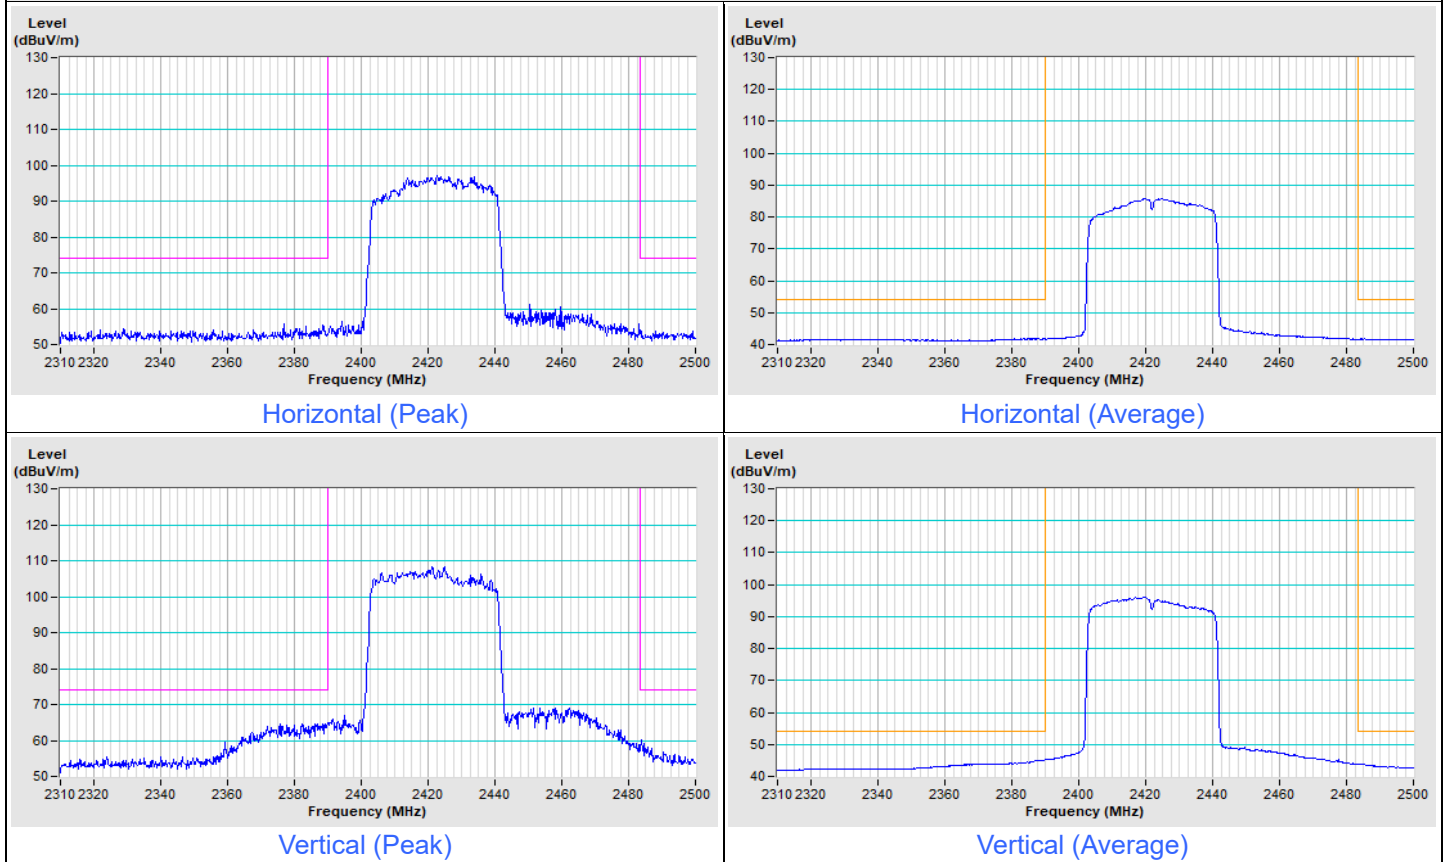


802.11be (EHT40) Channel 9

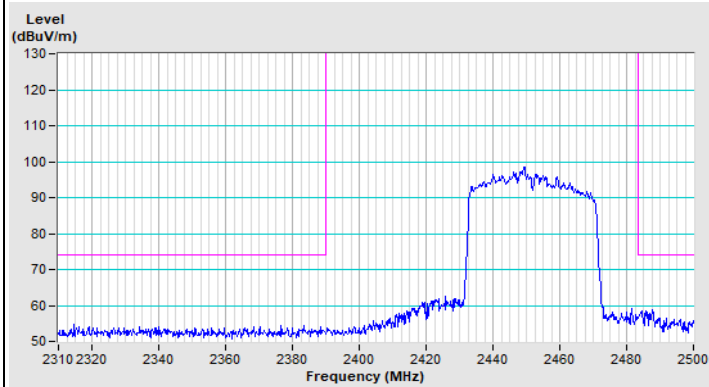


Horizontal (Peak)

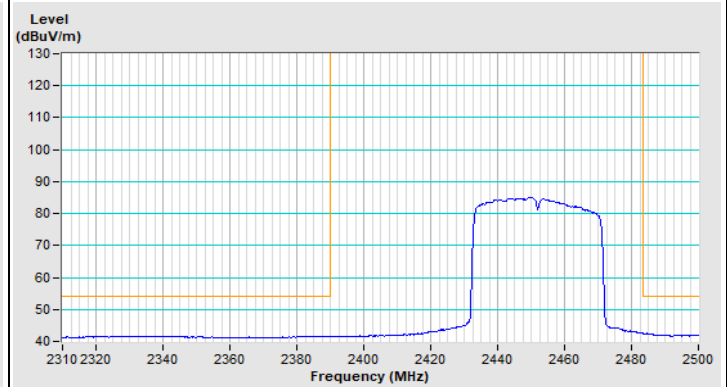

Horizontal (Average)

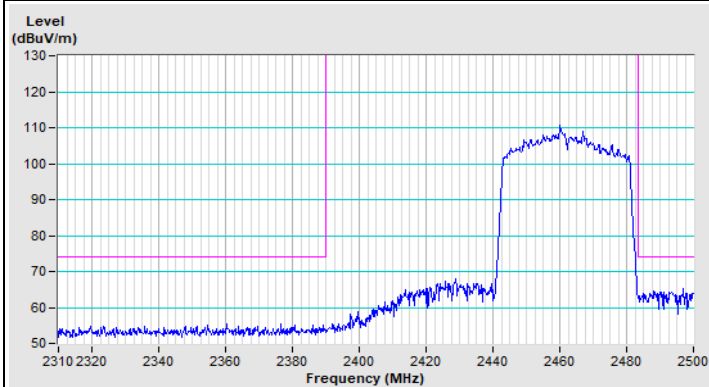


Vertical (Peak)

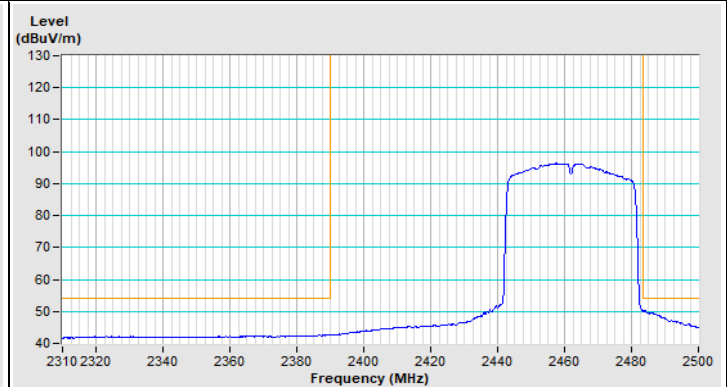


Vertical (Average)


802.11be (EHT40) Channel 10

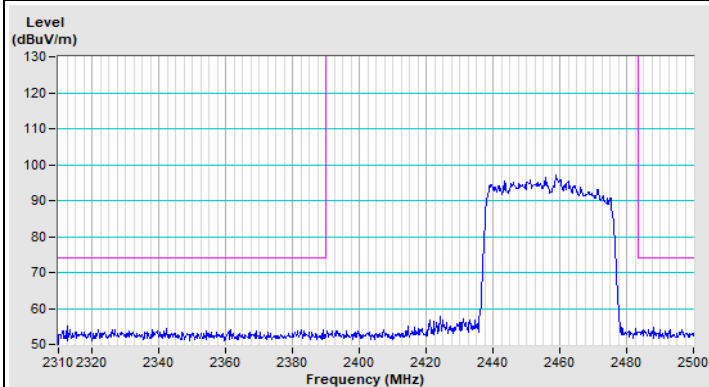


Horizontal (Peak)

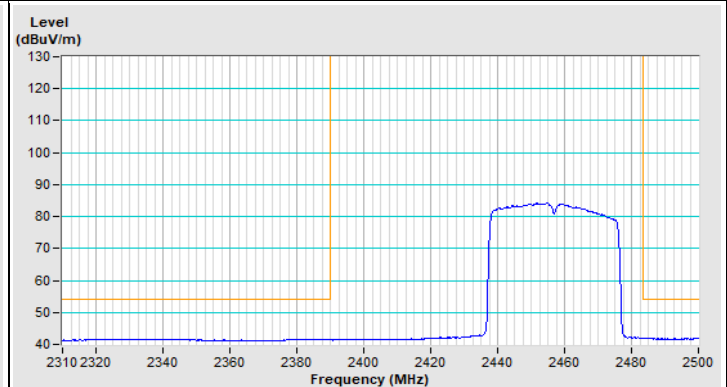

Horizontal (Average)

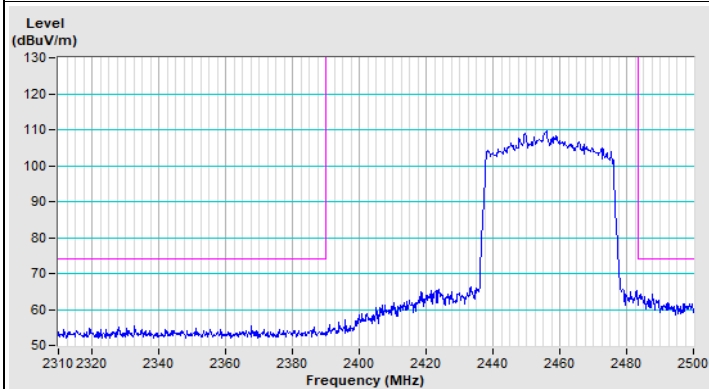


Vertical (Peak)

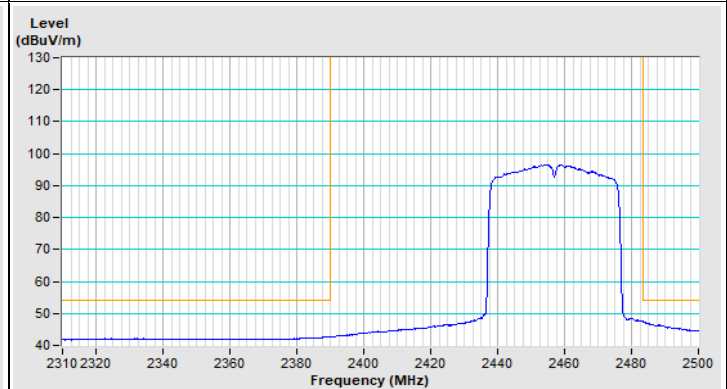


Vertical (Average)


802.11be (EHT40) Channel 11

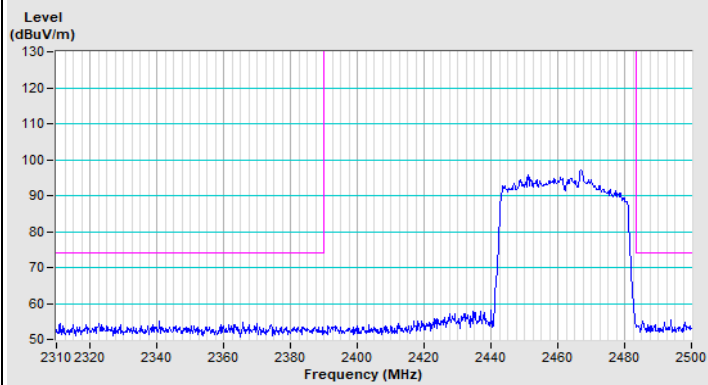


Horizontal (Peak)

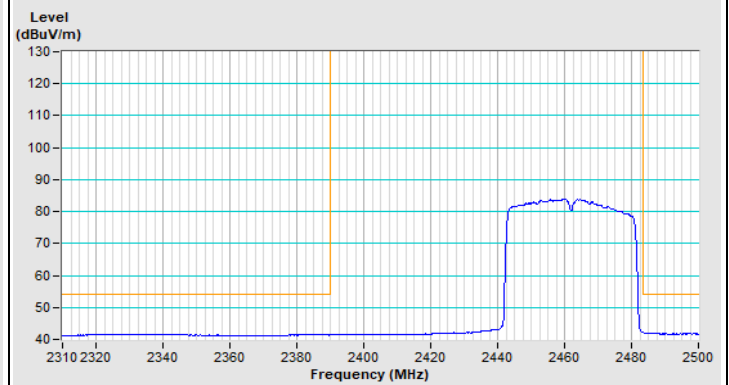

Horizontal (Average)

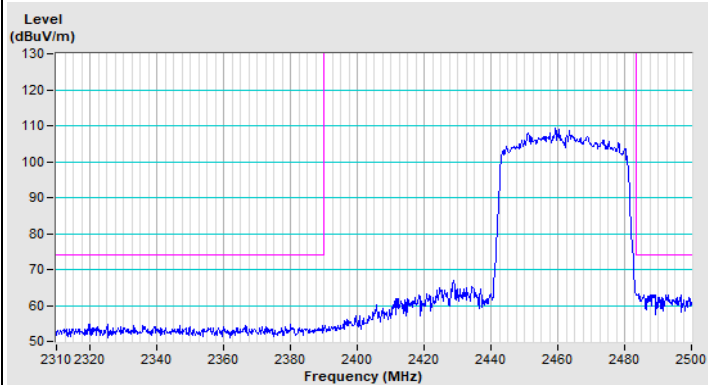


Vertical (Peak)

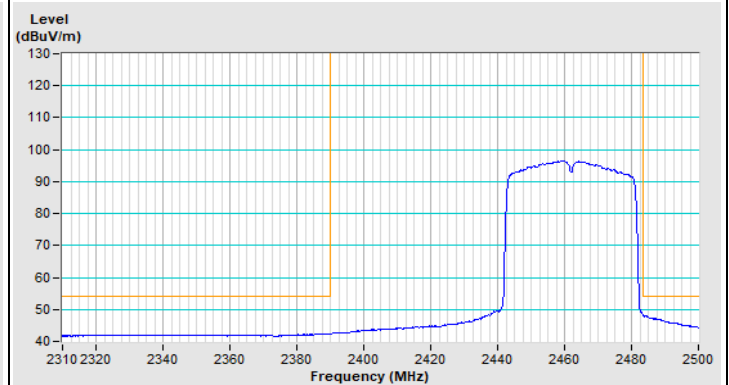


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

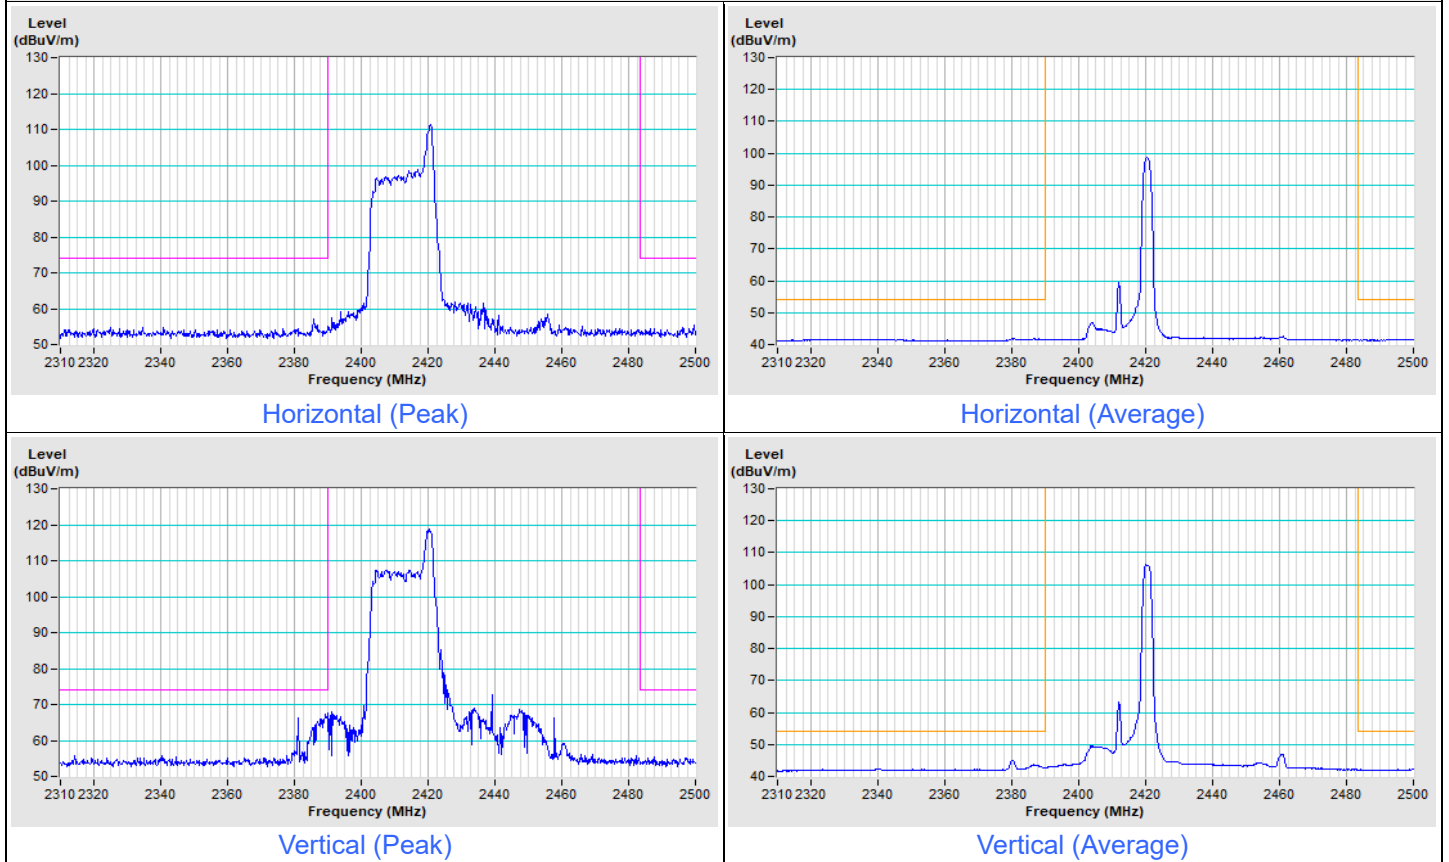


802.11be (EHT20) 26-tone RU Channel 11

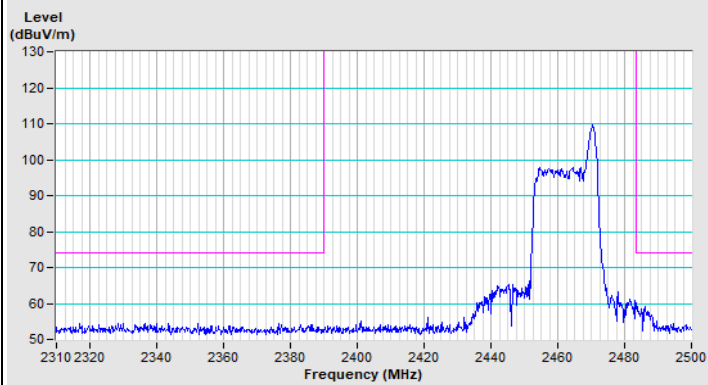


Horizontal (Peak)

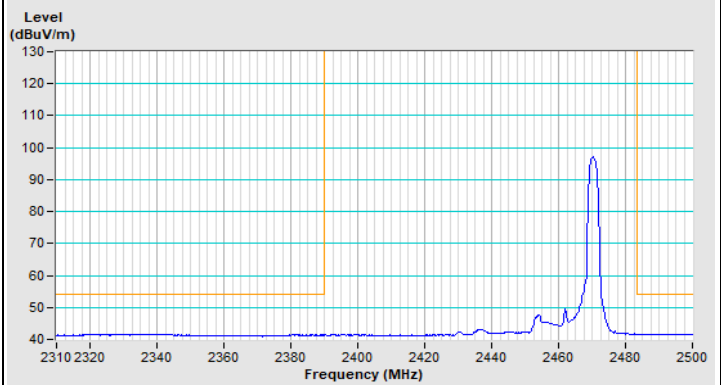

Horizontal (Average)

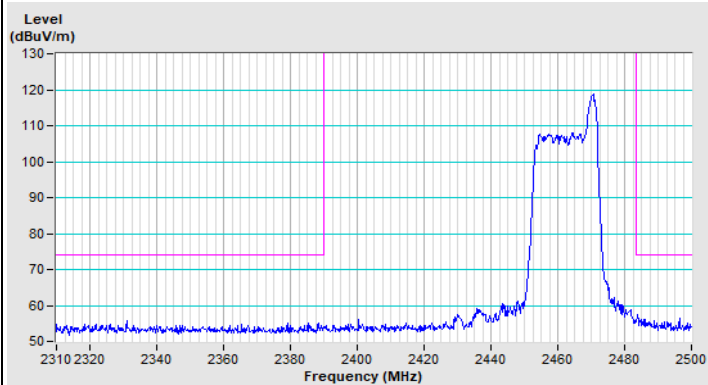


Vertical (Peak)

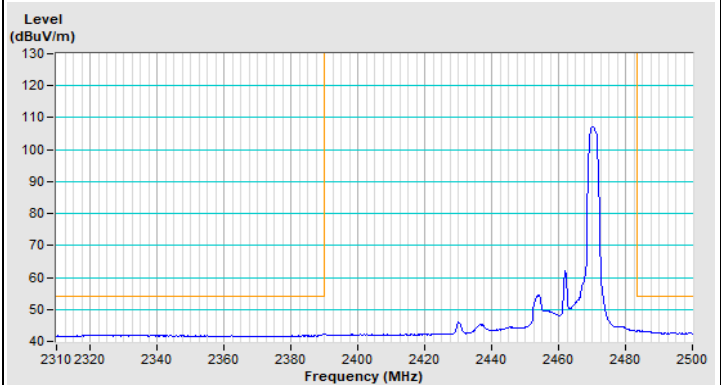


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 12

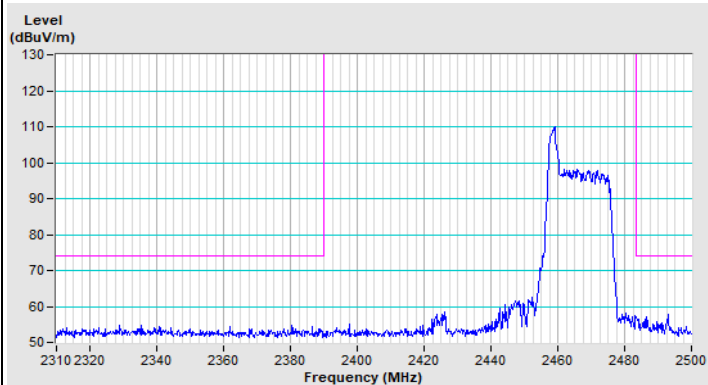


Horizontal (Peak)

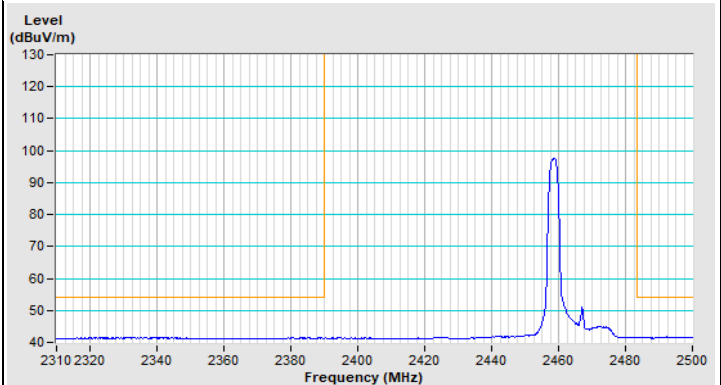

Horizontal (Average)

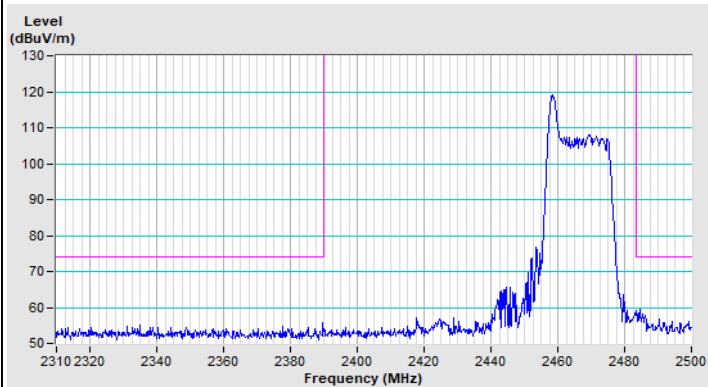


Vertical (Peak)

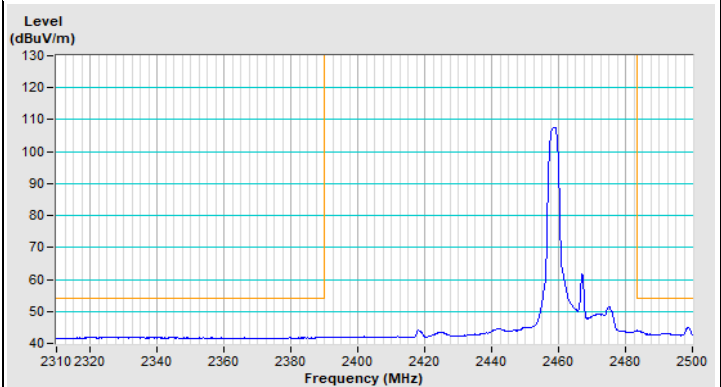


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 13

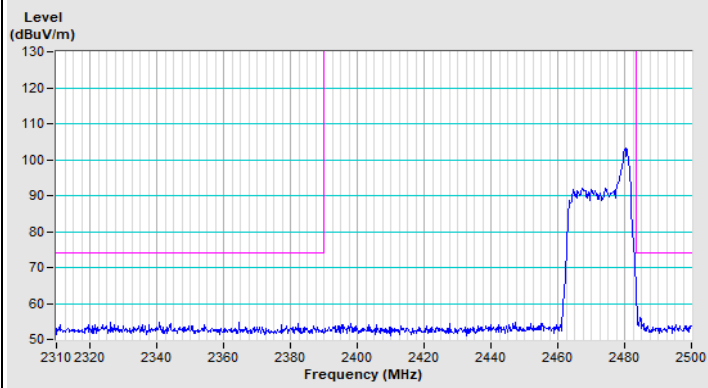


Horizontal (Peak)

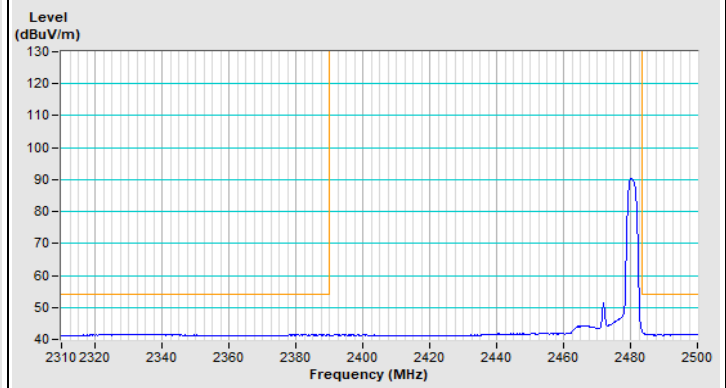

Horizontal (Average)

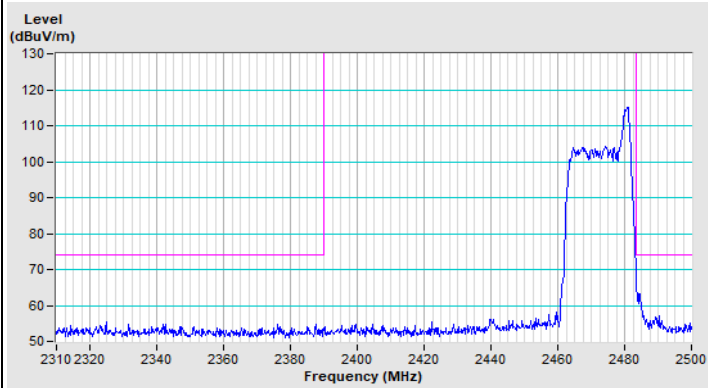


Vertical (Peak)

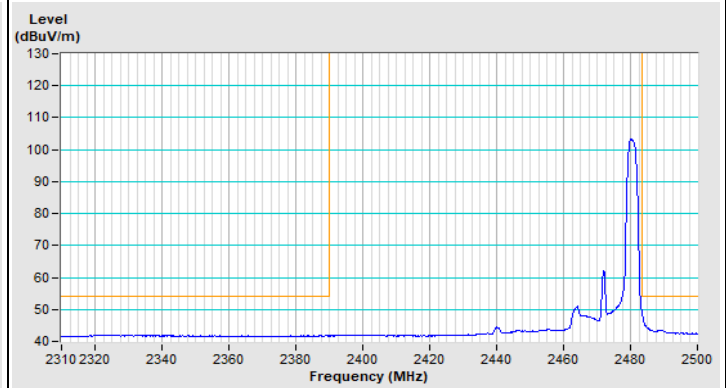


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

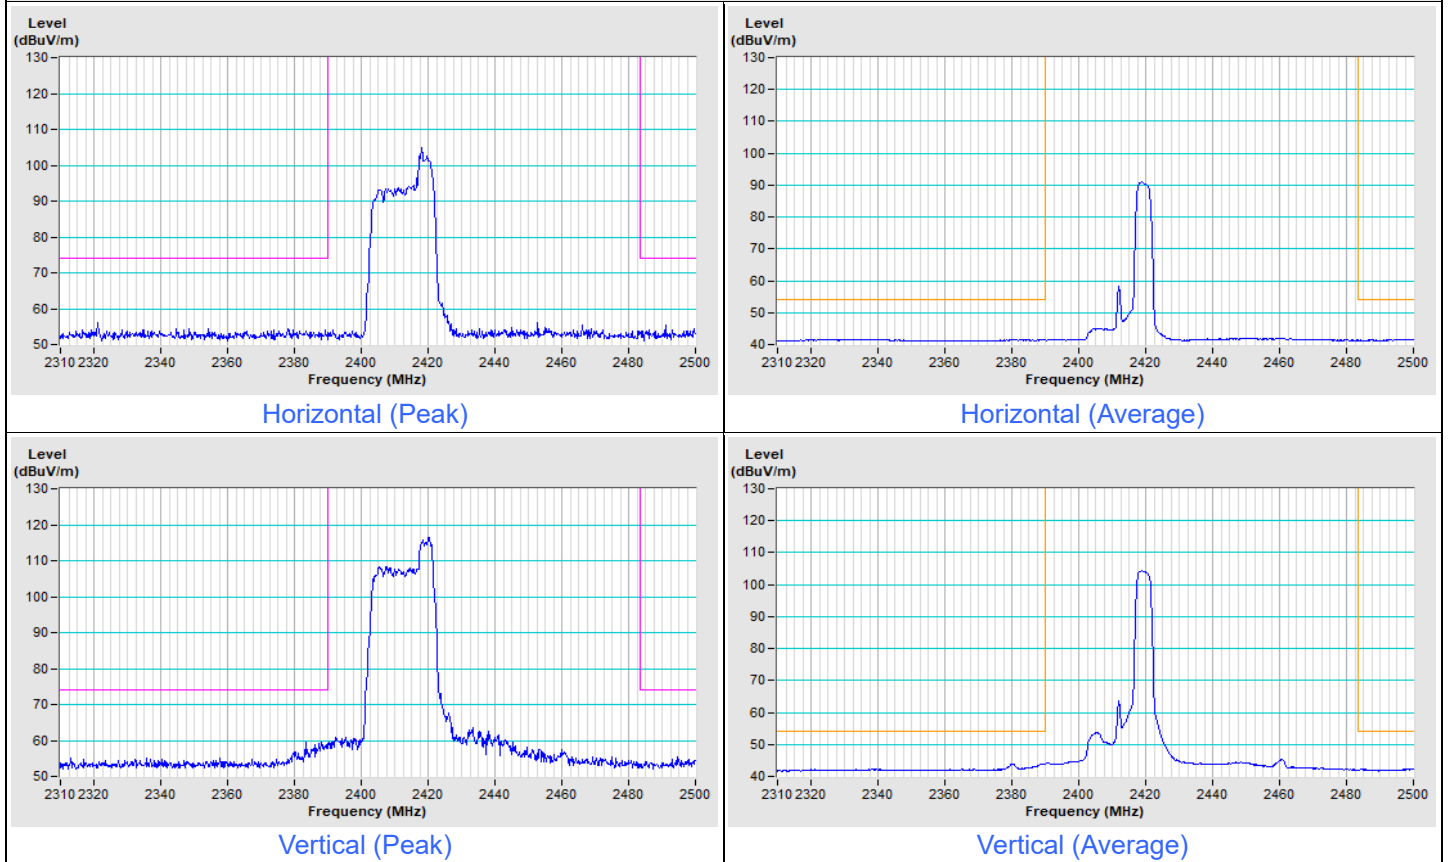


802.11be (EHT20) 52-tone RU Channel 11

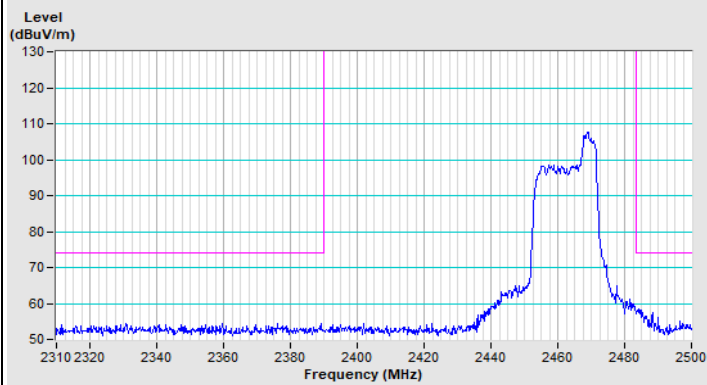


Horizontal (Peak)

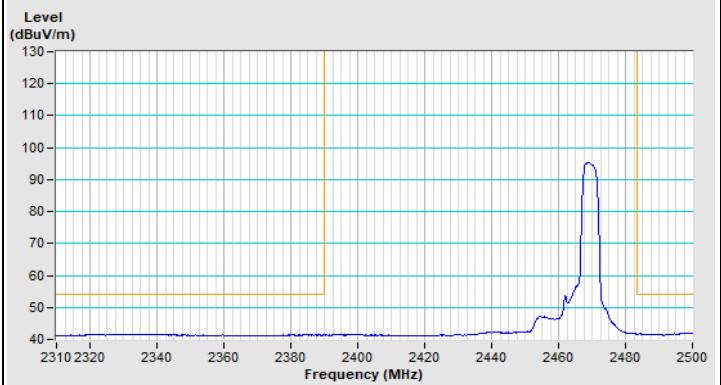

Horizontal (Average)

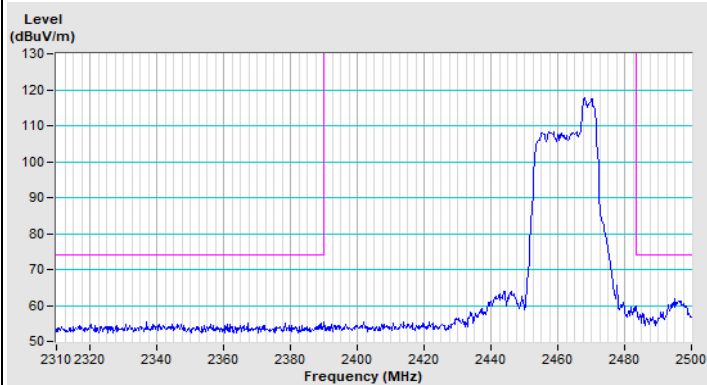


Vertical (Peak)

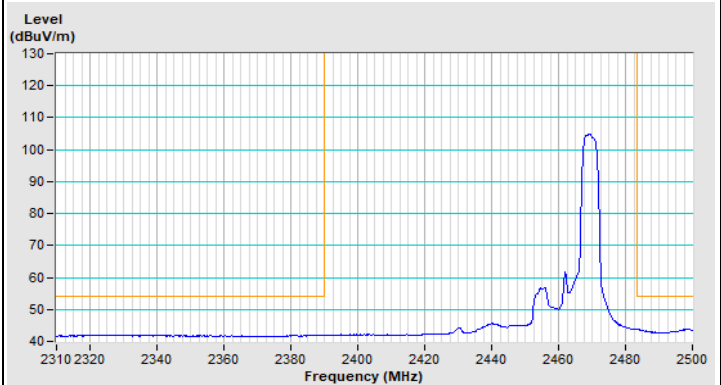


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 12

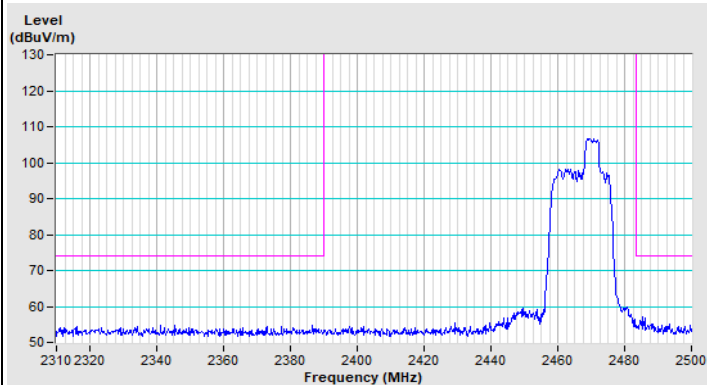


Horizontal (Peak)

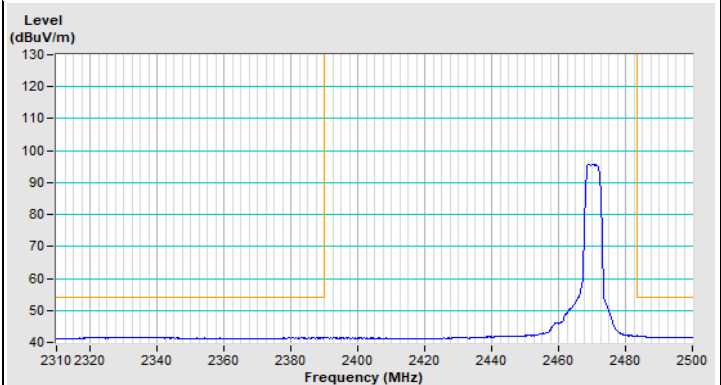

Horizontal (Average)

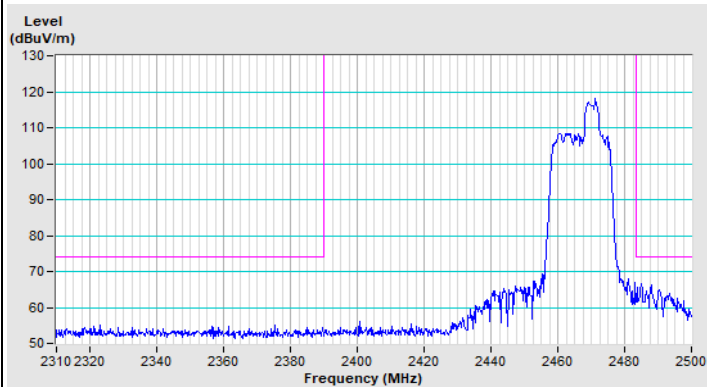


Vertical (Peak)

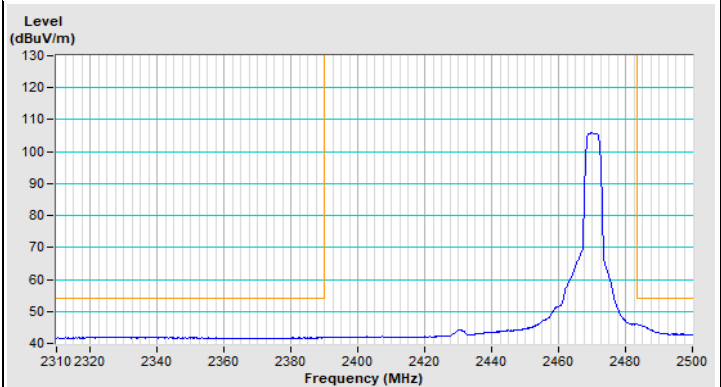


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 13

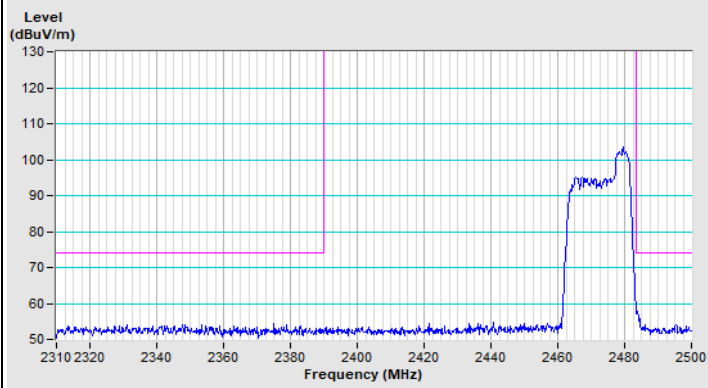


Horizontal (Peak)

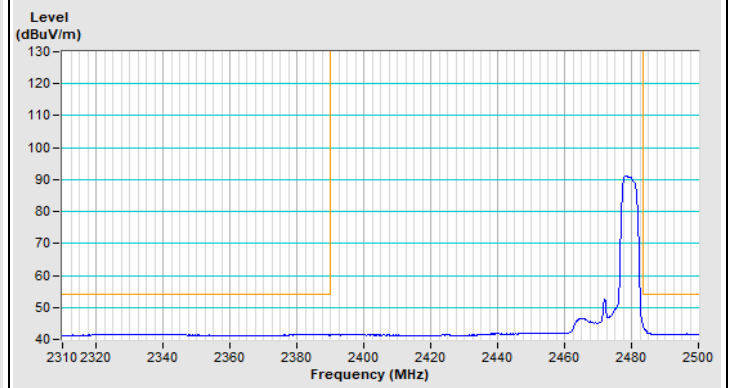

Horizontal (Average)

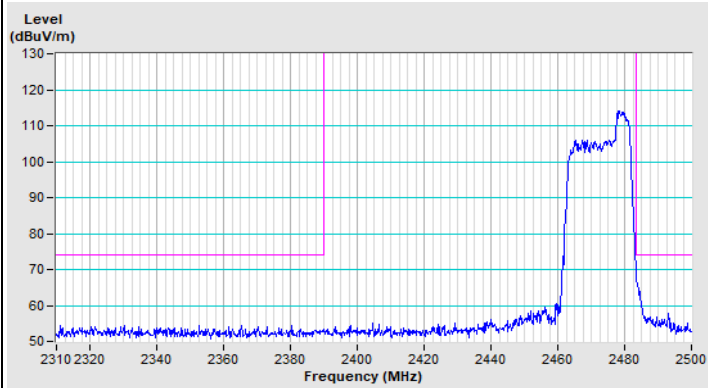


Vertical (Peak)

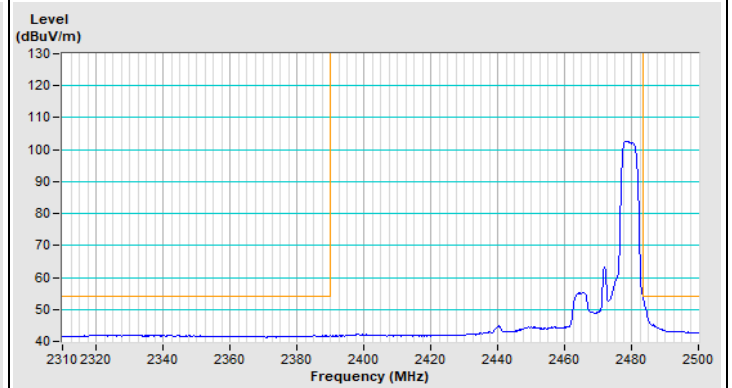


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

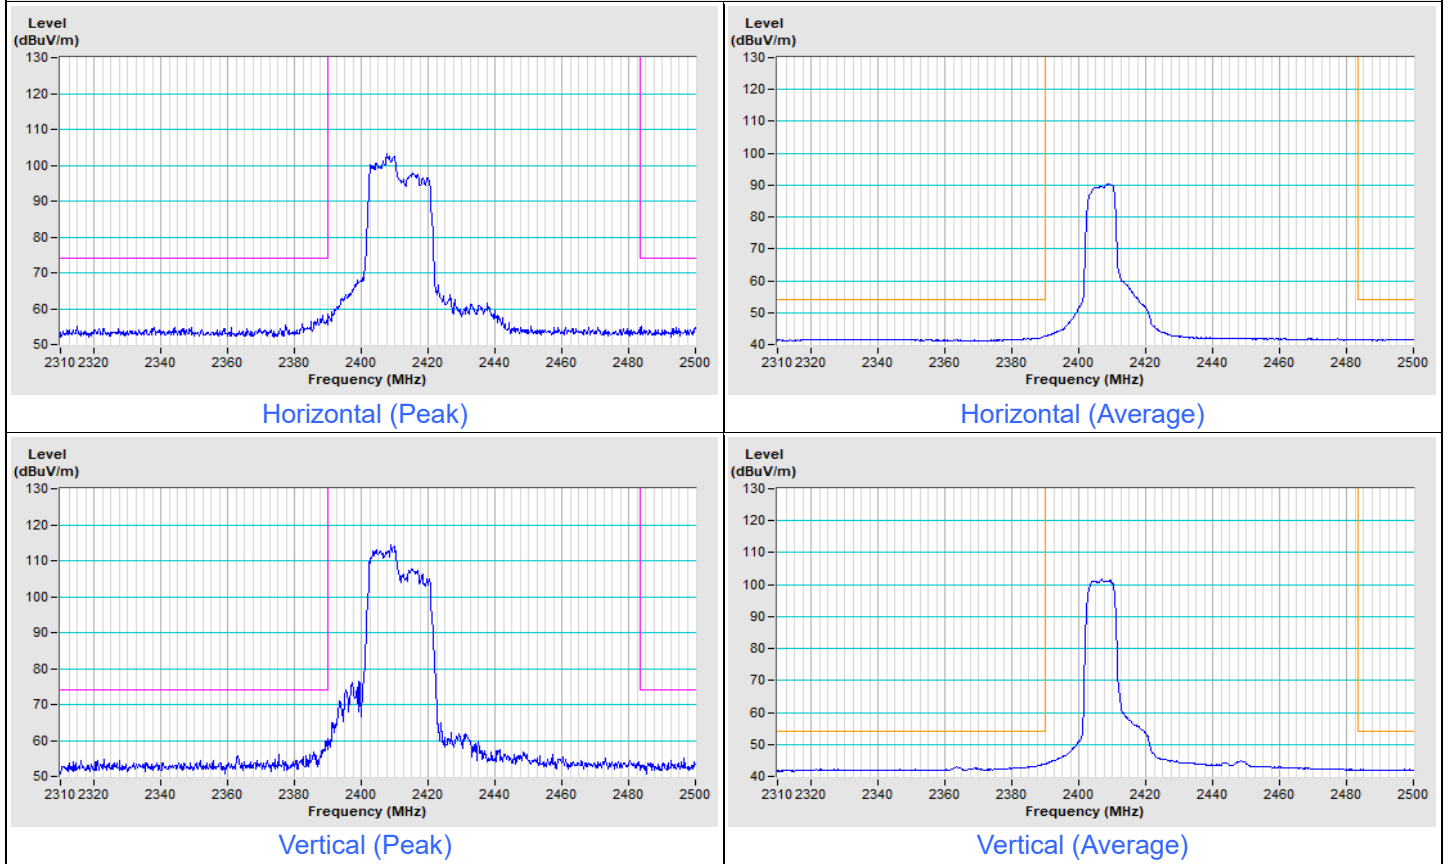


802.11be (EHT20) 106-tone RU Channel 11

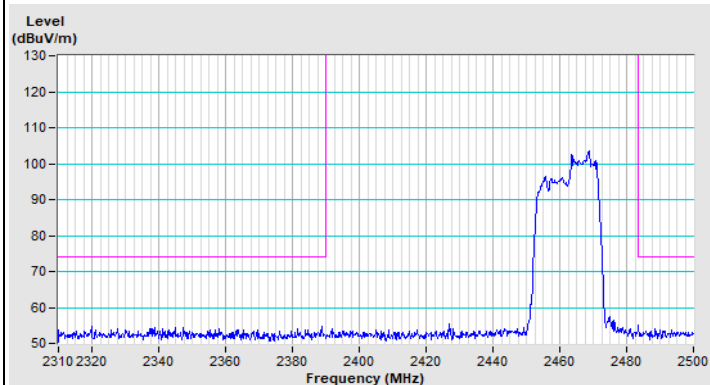


Horizontal (Peak)

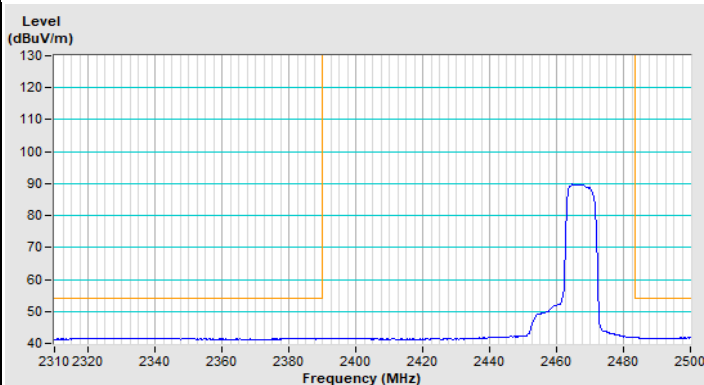

Horizontal (Average)

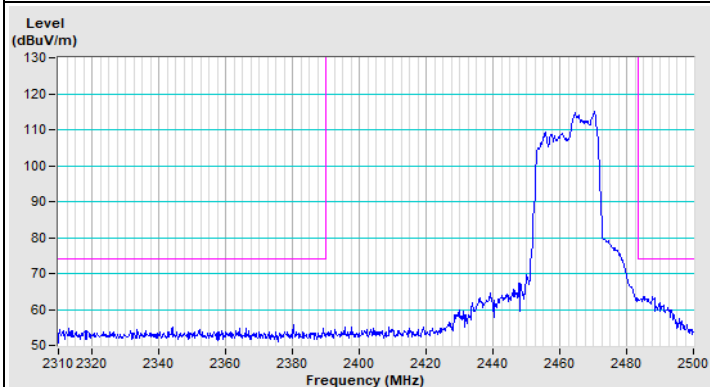


Vertical (Peak)

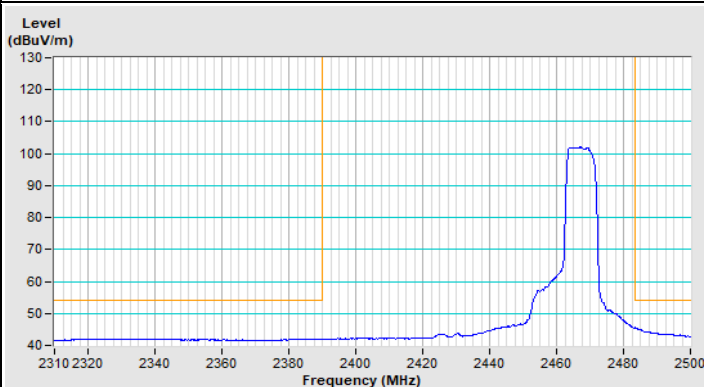


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 12

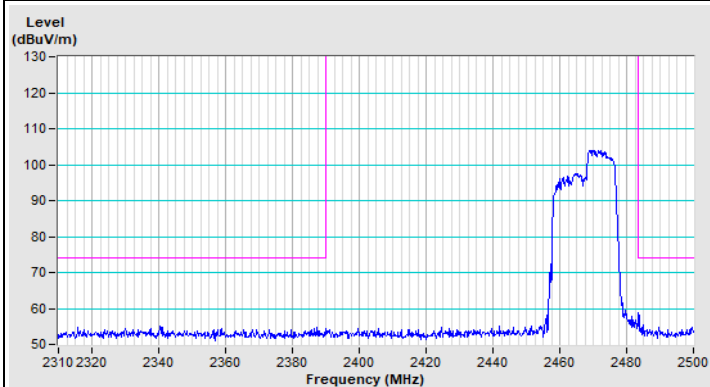


Horizontal (Peak)

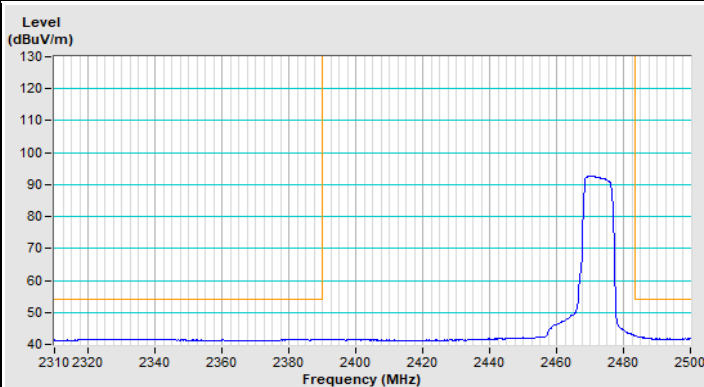

Horizontal (Average)

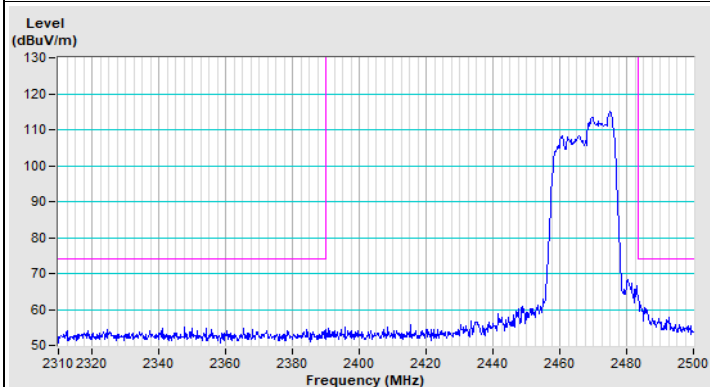


Vertical (Peak)

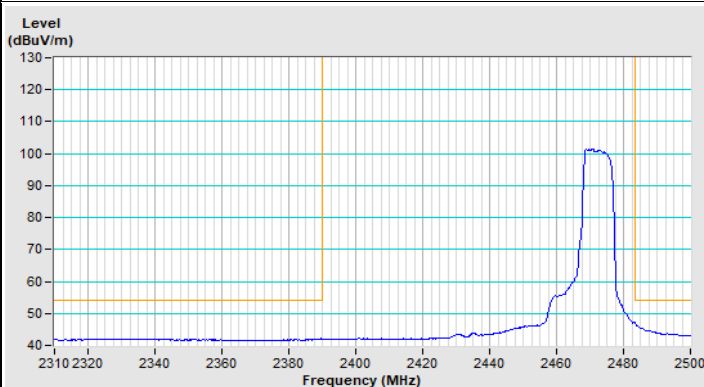


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 13

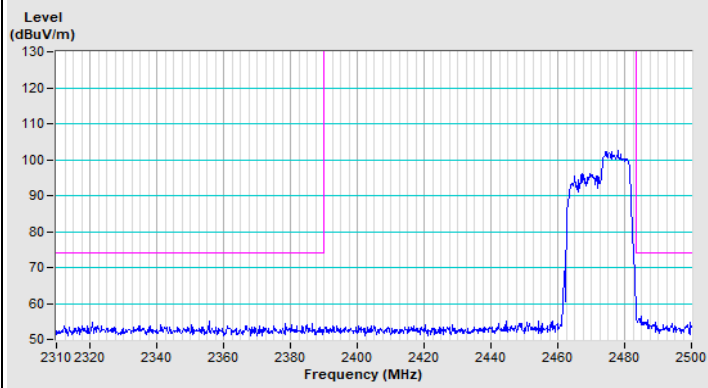


Horizontal (Peak)

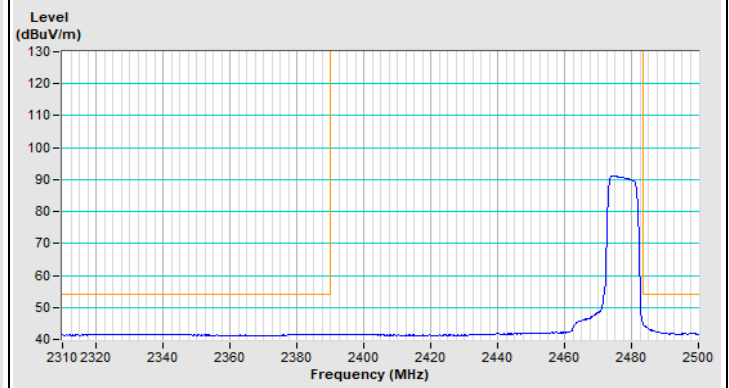

Horizontal (Average)

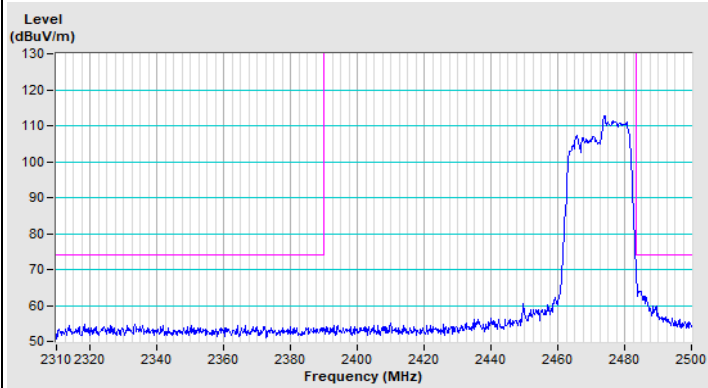

Vertical (Peak)

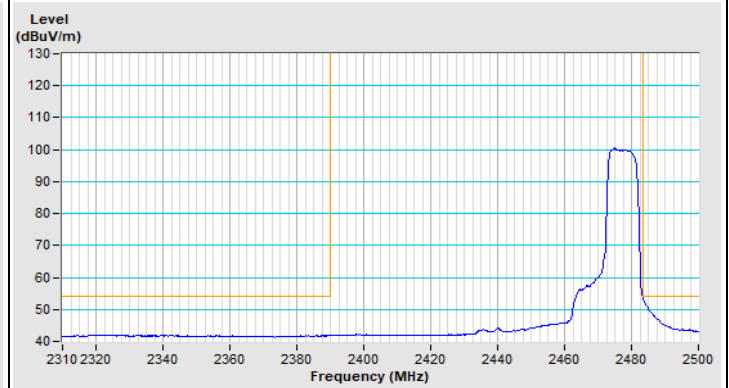


Vertical (Average)


2Tx

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11b Channel 1

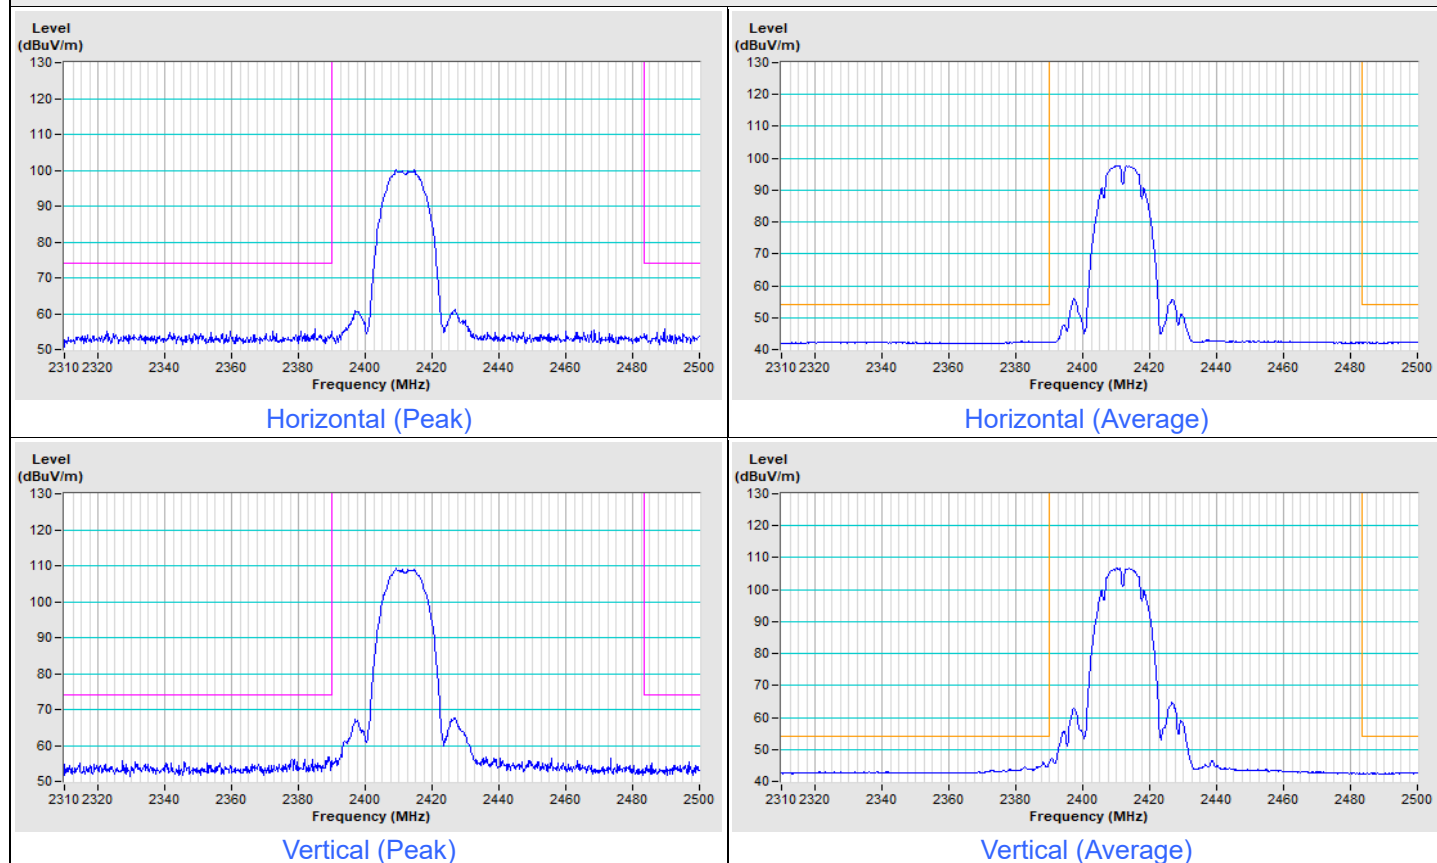


802.11b Channel 11

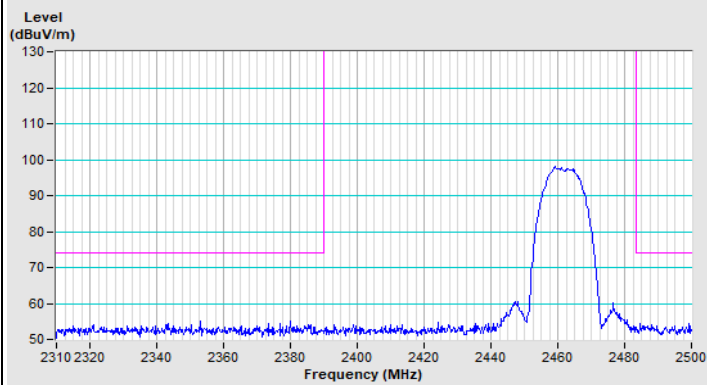


Horizontal (Peak)

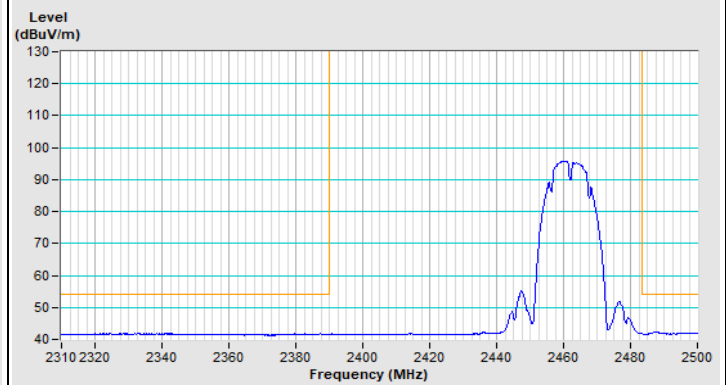

Horizontal (Average)

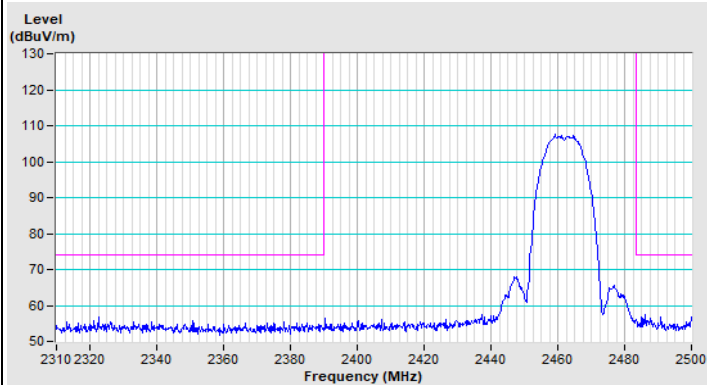


Vertical (Peak)

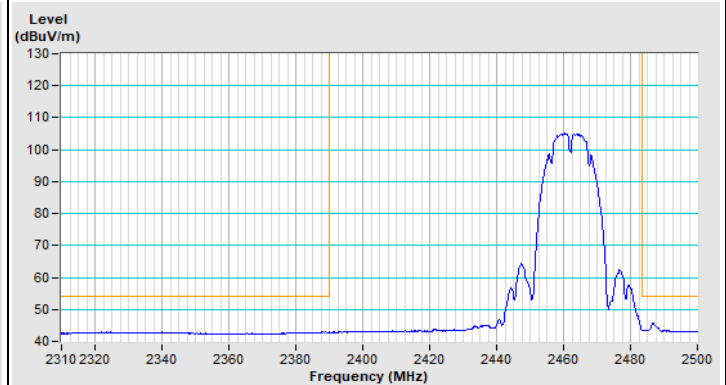


Vertical (Average)


802.11b Channel 12

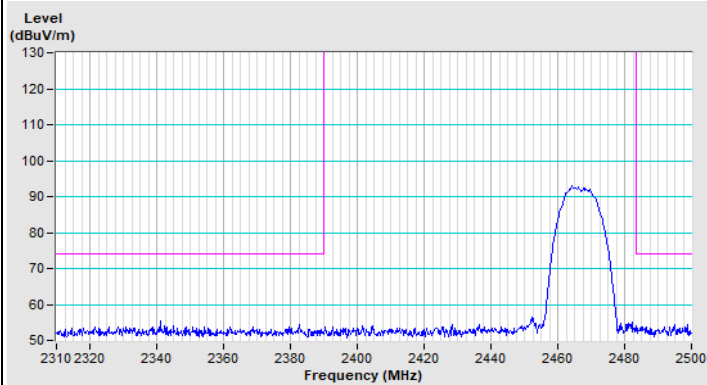


Horizontal (Peak)

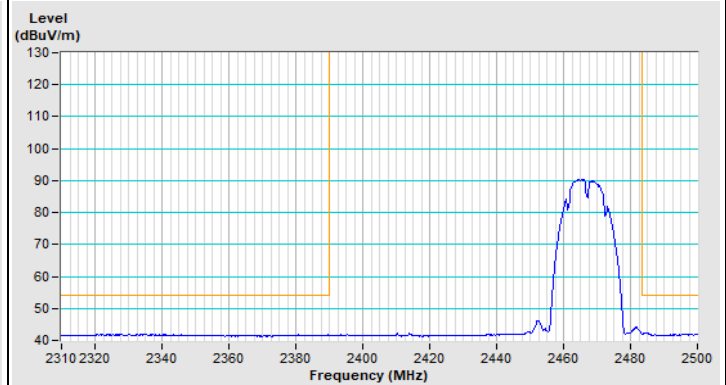

Horizontal (Average)

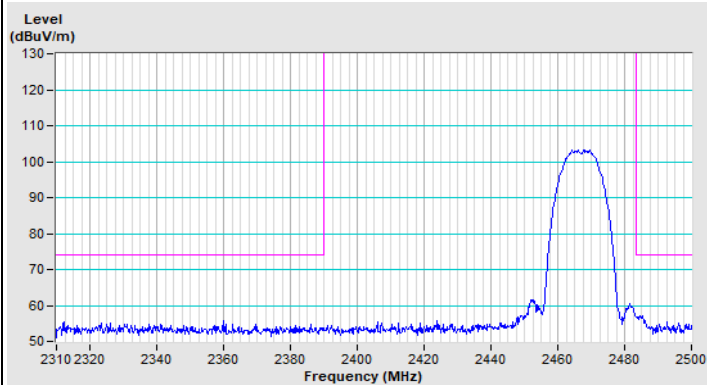


Vertical (Peak)

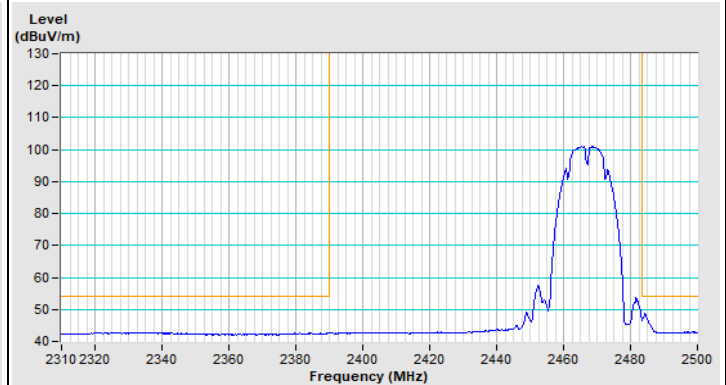


Vertical (Average)


802.11b Channel 13

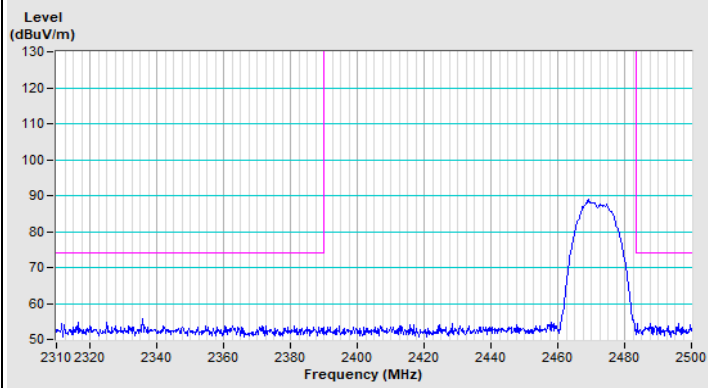


Horizontal (Peak)

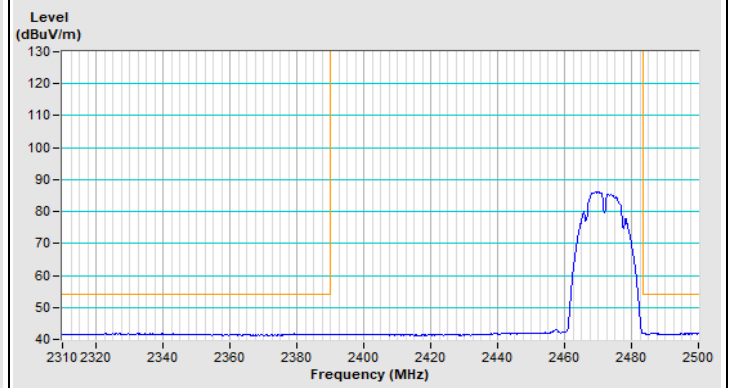

Horizontal (Average)

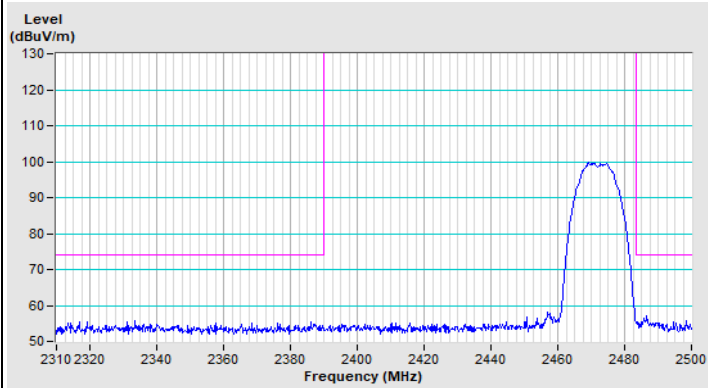


Vertical (Peak)

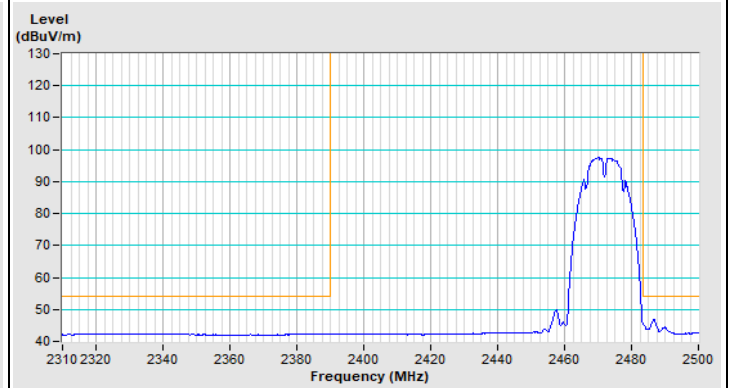


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11g Channel 1

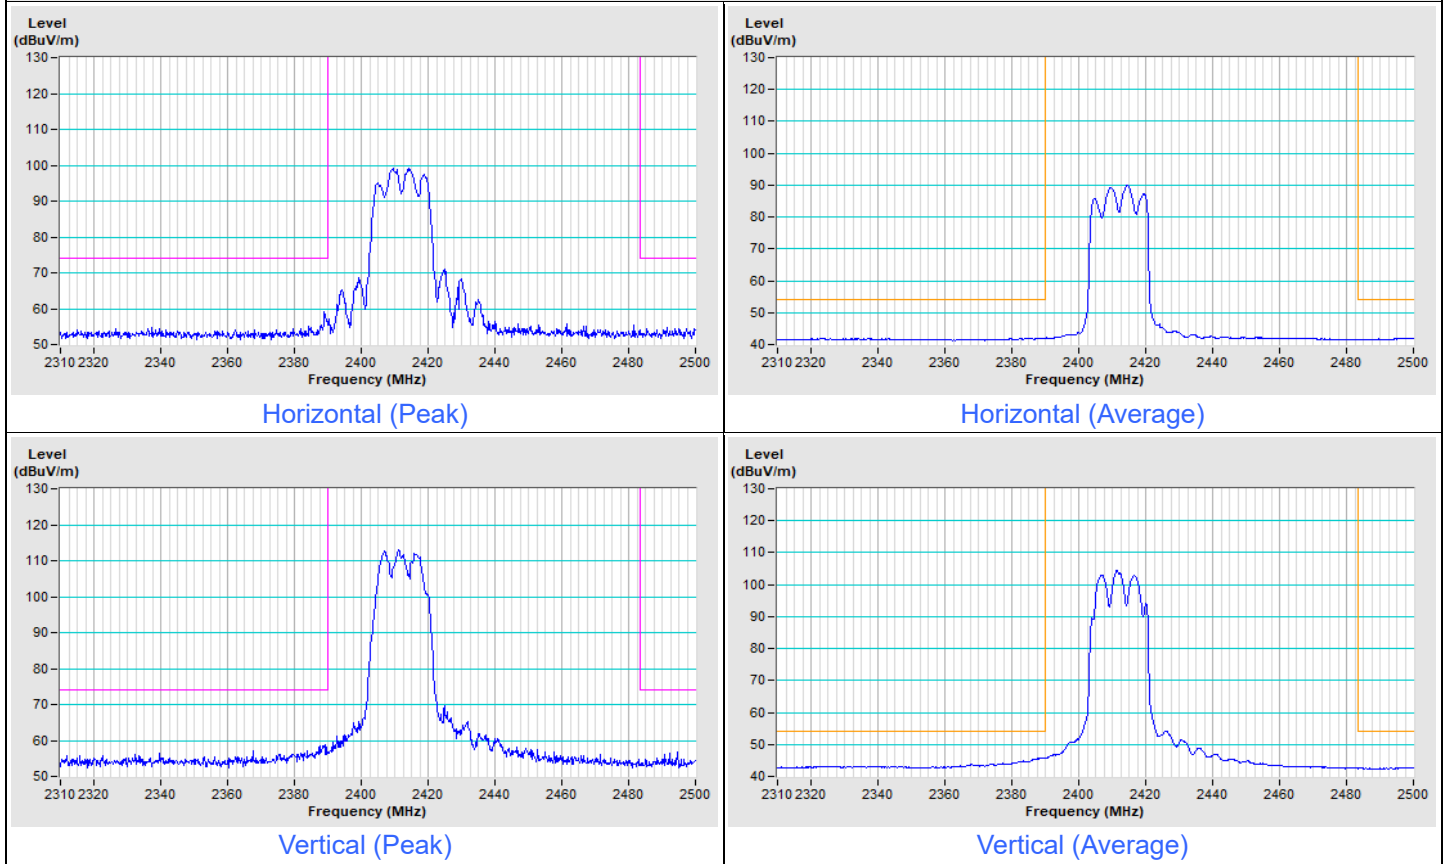


802.11g Channel 11

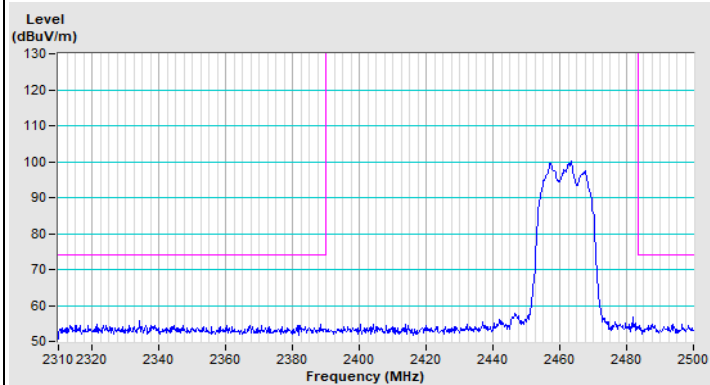


Horizontal (Peak)

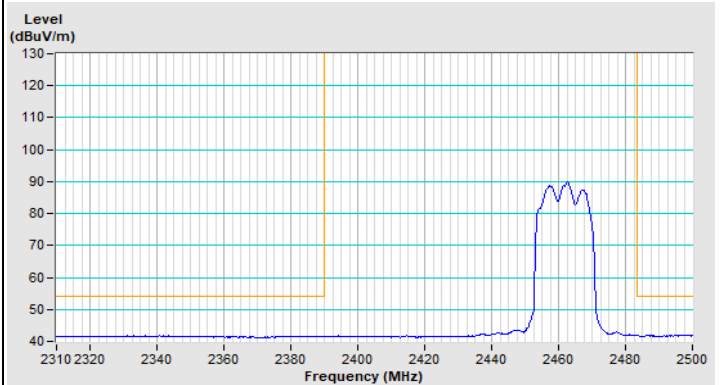

Horizontal (Average)

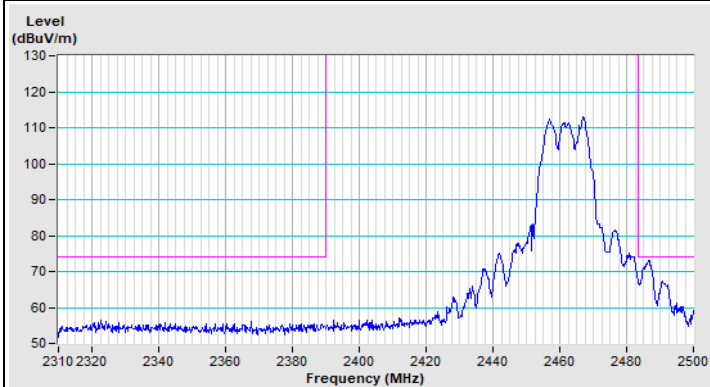


Vertical (Peak)

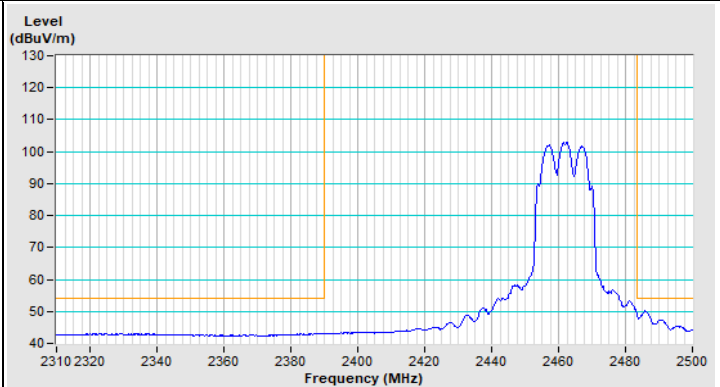


Vertical (Average)


802.11g Channel 12

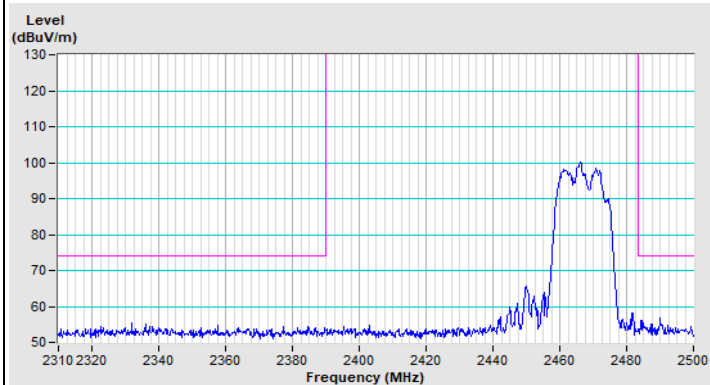


Horizontal (Peak)

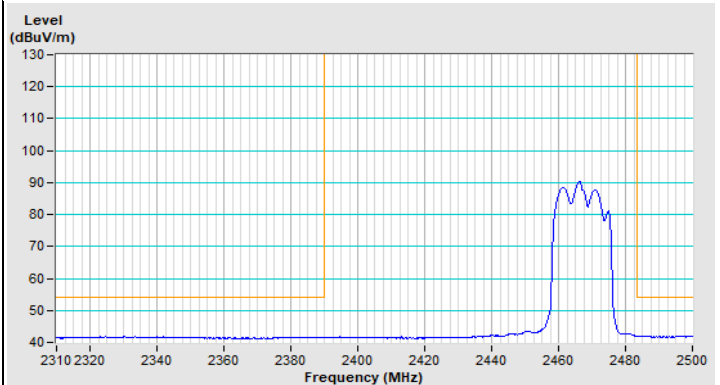

Horizontal (Average)

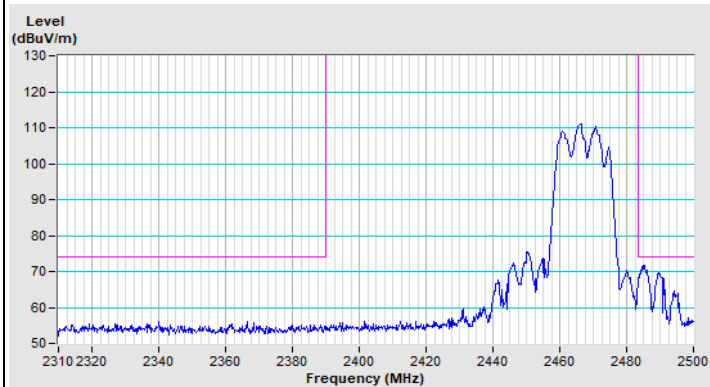


Vertical (Peak)

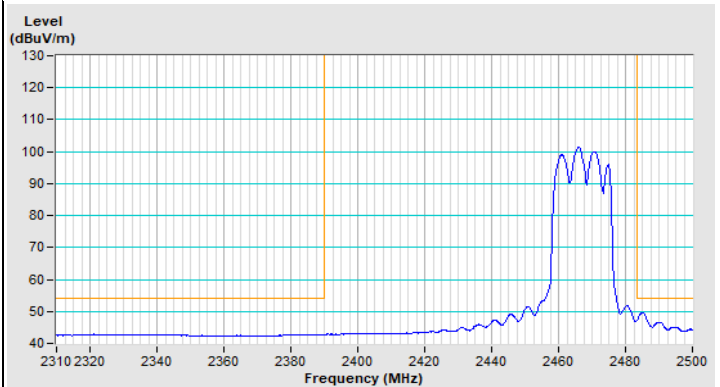


Vertical (Average)


802.11g Channel 13

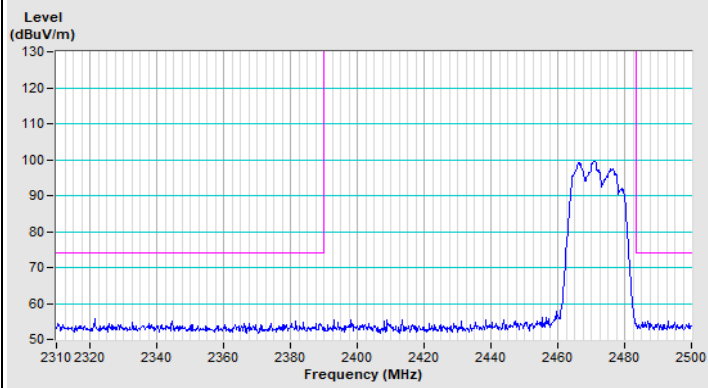


Horizontal (Peak)

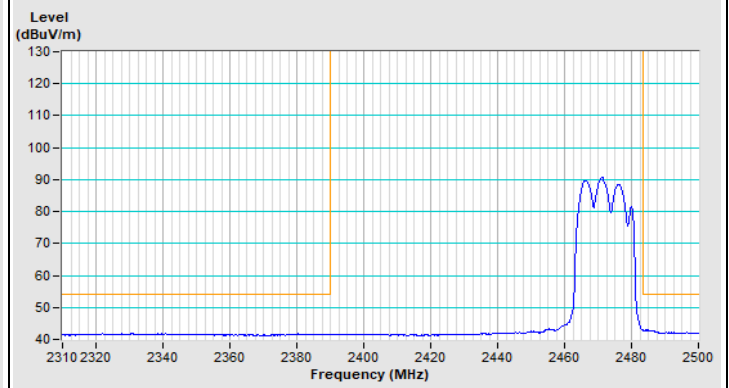

Horizontal (Average)

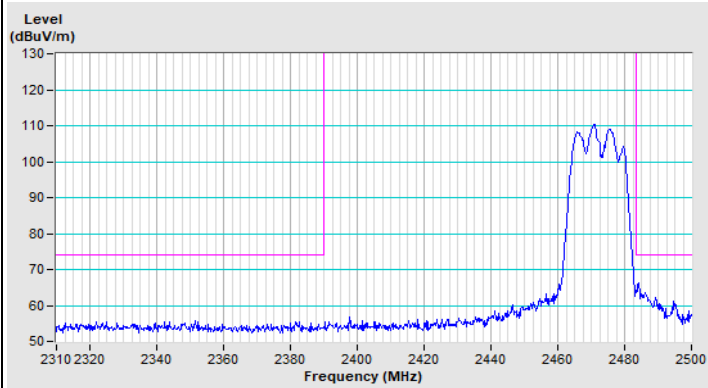


Vertical (Peak)

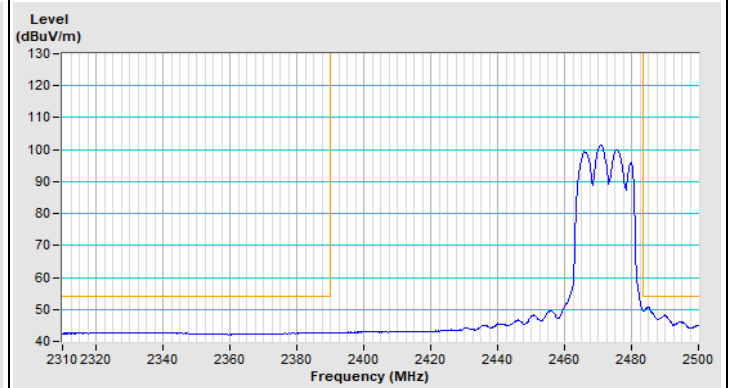





Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) Channel 1

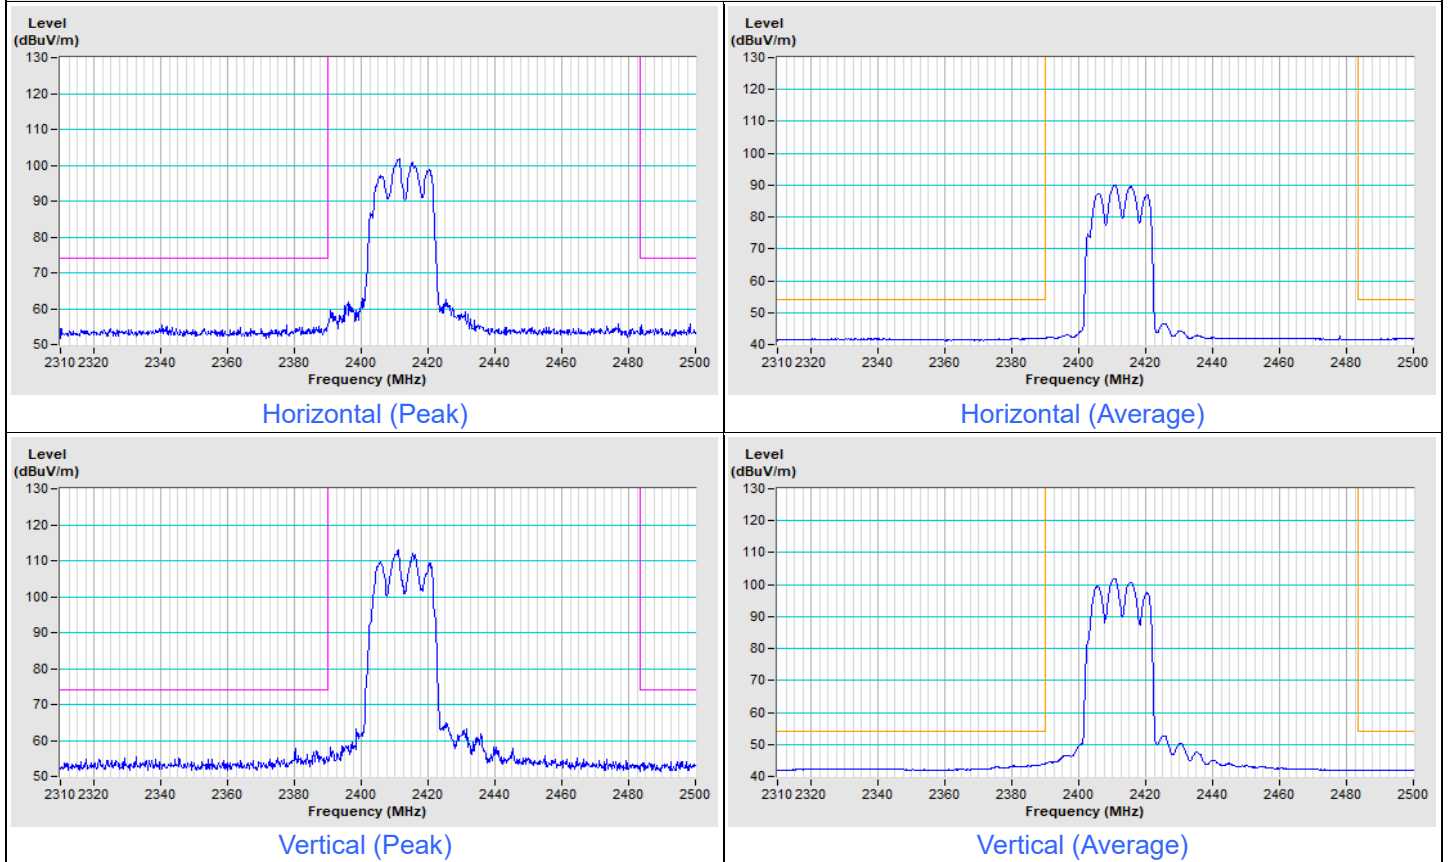


802.11be (EHT20) Channel 11

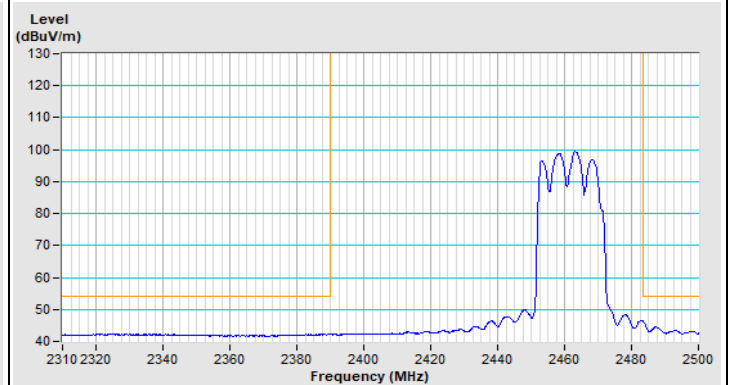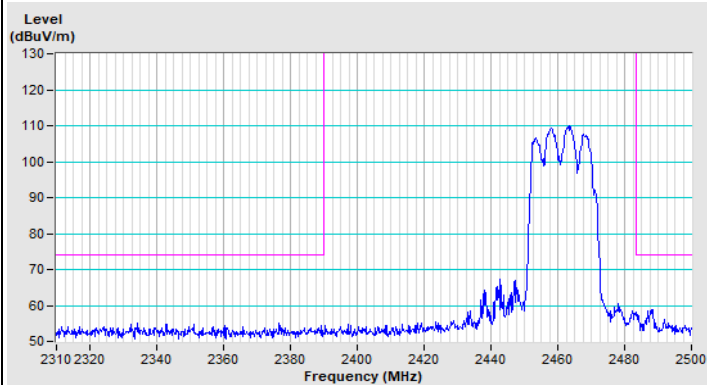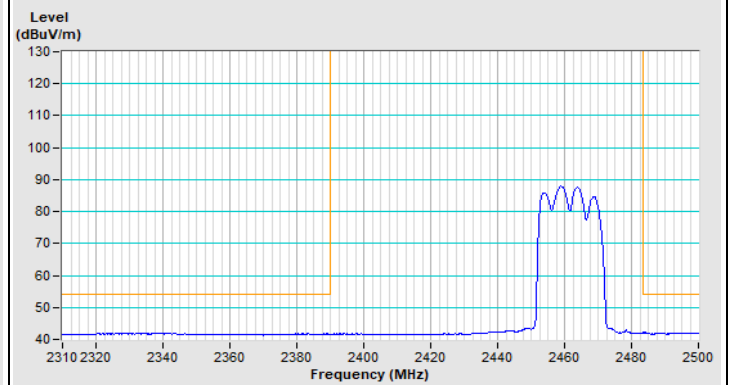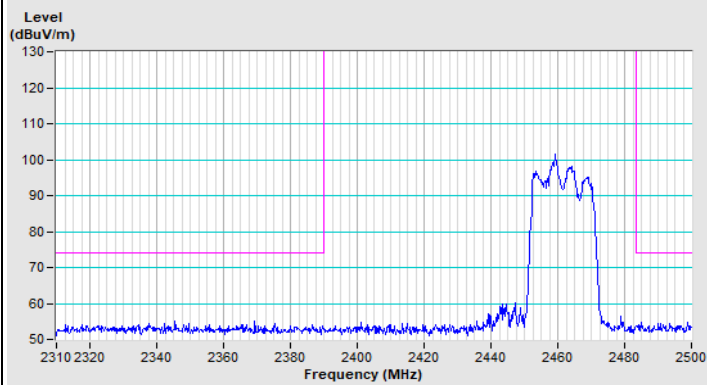


802.11be (EHT20) Channel 12

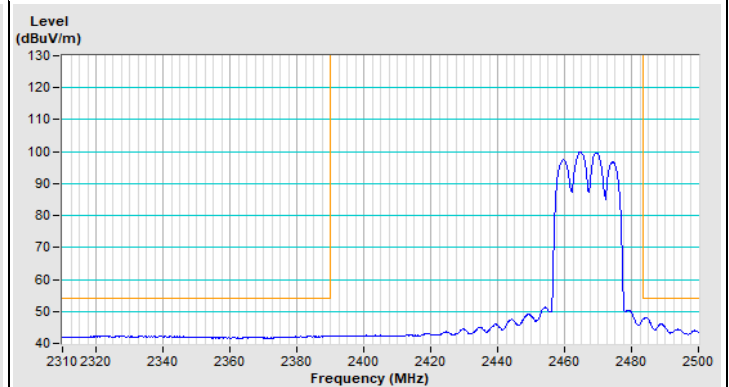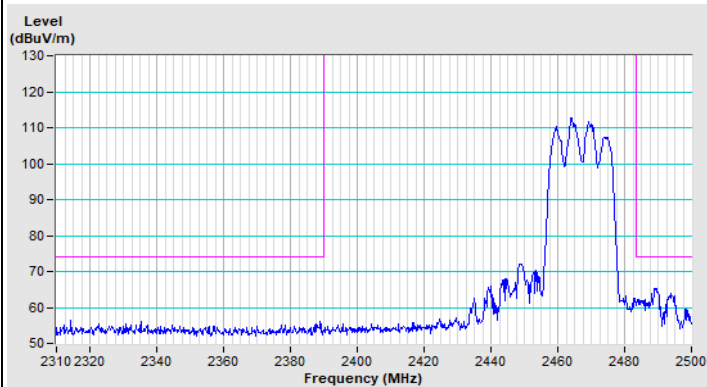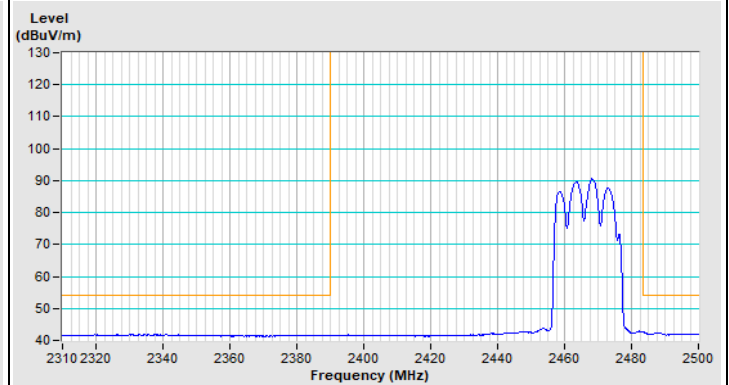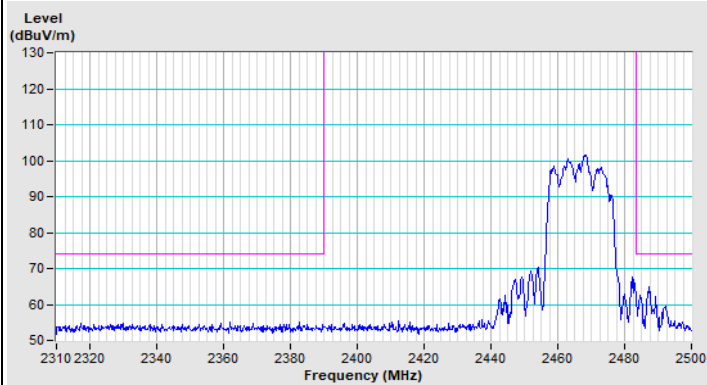


802.11be (EHT20) Channel 13

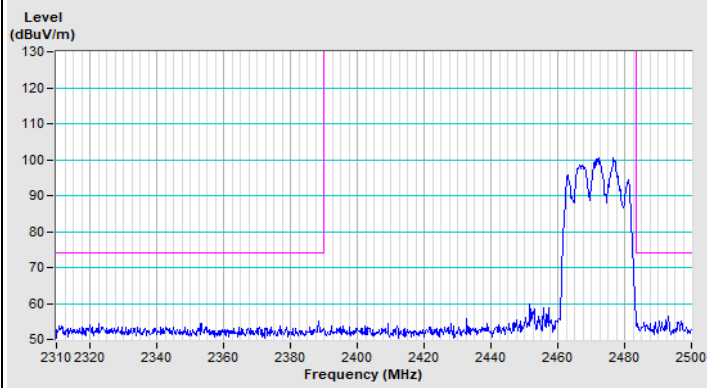


Horizontal (Peak)

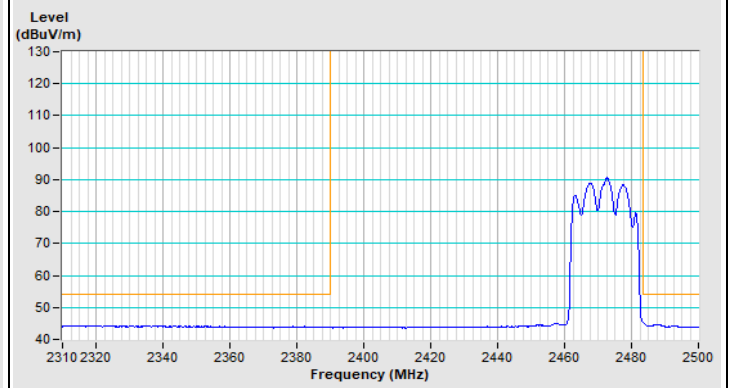

Horizontal (Average)

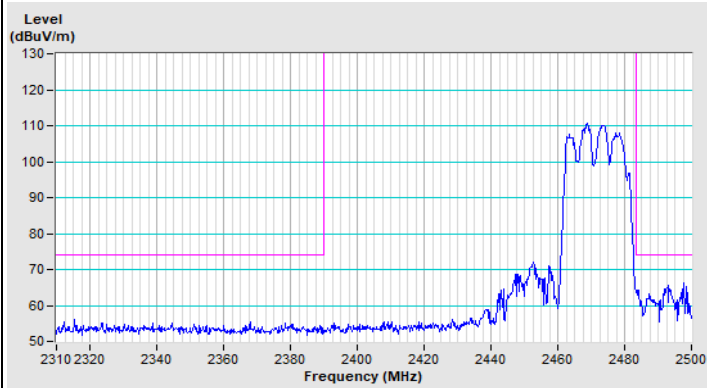


Vertical (Peak)

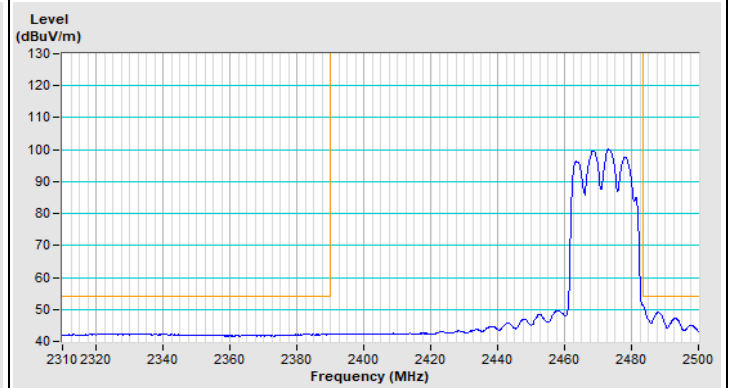


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 3

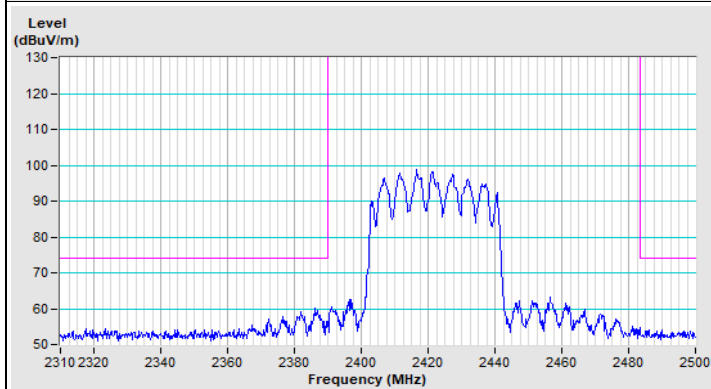


Horizontal (Peak)

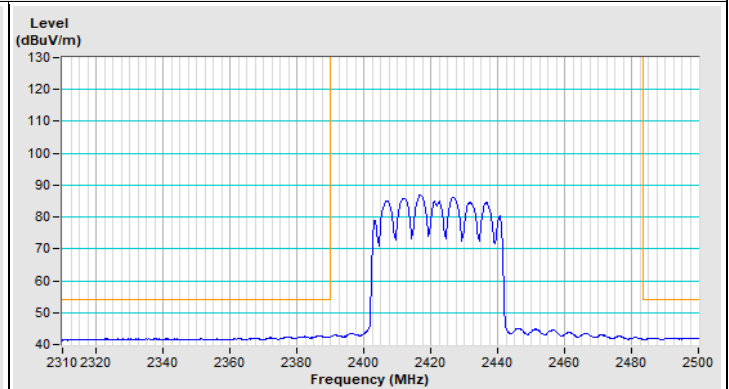

Horizontal (Average)

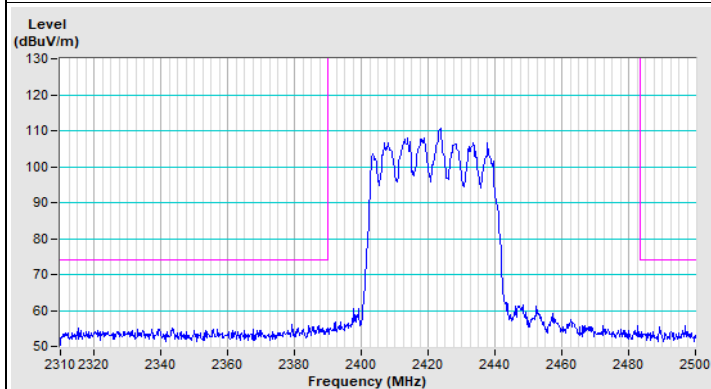


Vertical (Peak)

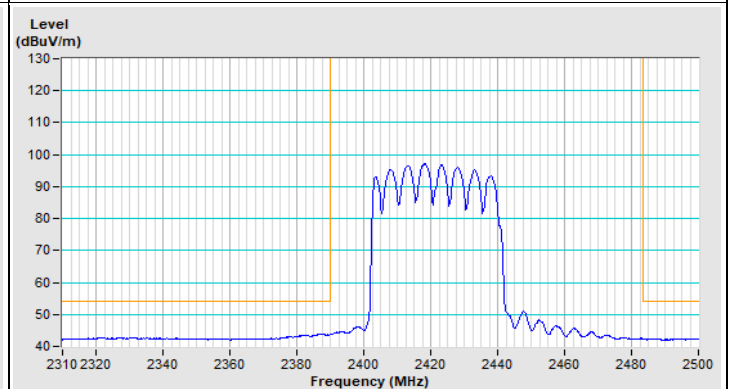


Vertical (Average)


802.11be (EHT40) Channel 9

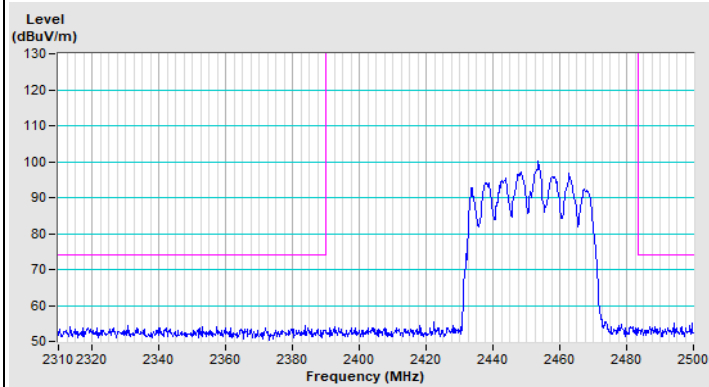


Horizontal (Peak)

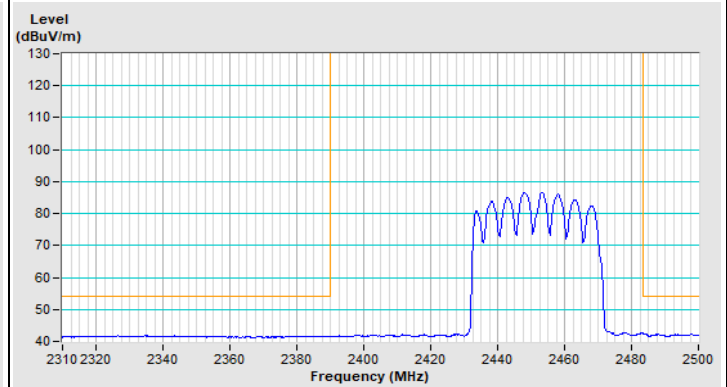

Horizontal (Average)

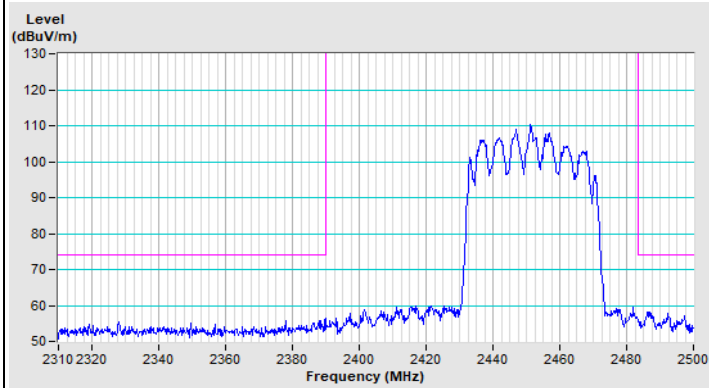


Vertical (Peak)

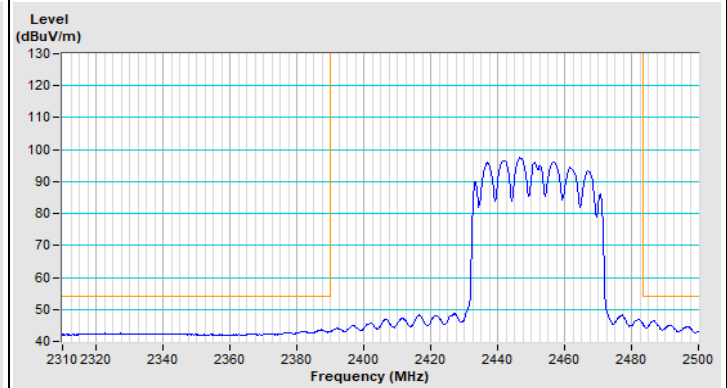


Vertical (Average)


802.11be (EHT40) Channel 10

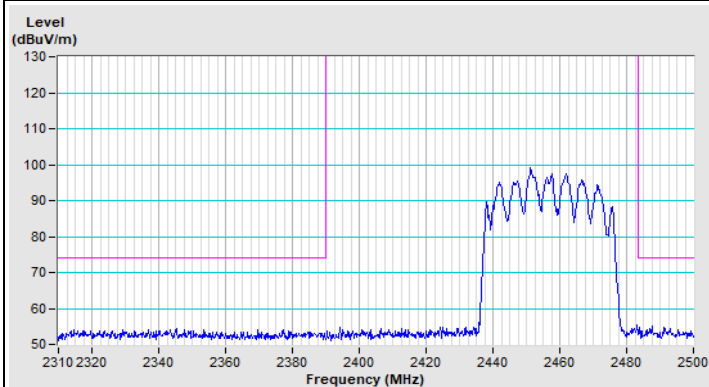


Horizontal (Peak)

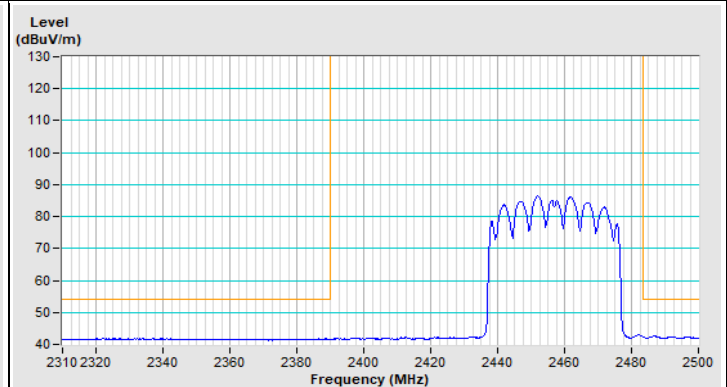

Horizontal (Average)

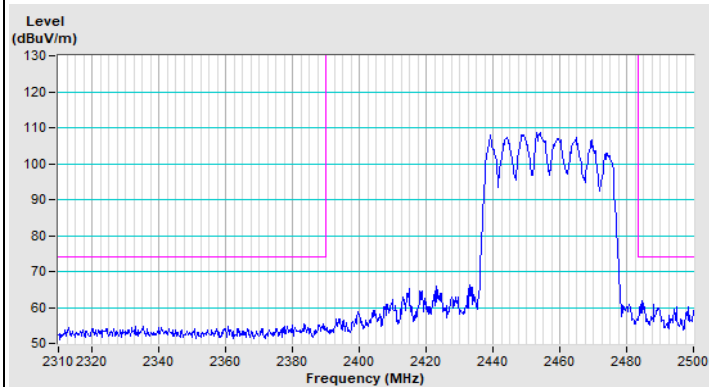


Vertical (Peak)

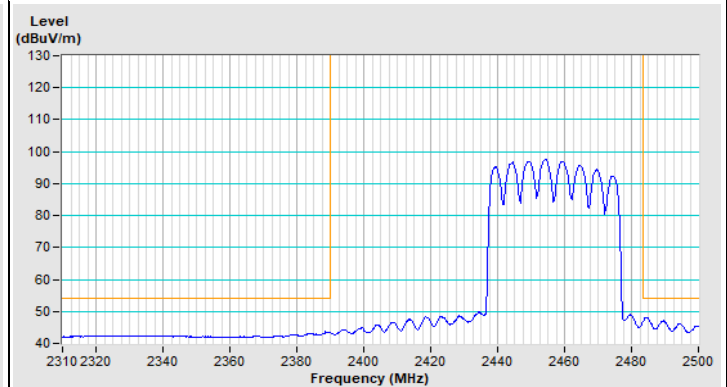


Vertical (Average)


802.11be (EHT40) Channel 11

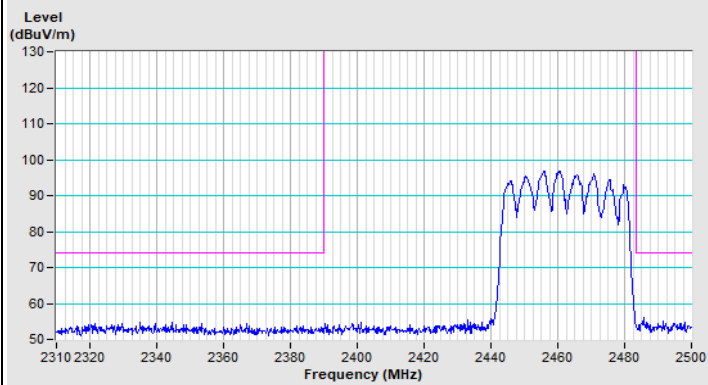


Horizontal (Peak)

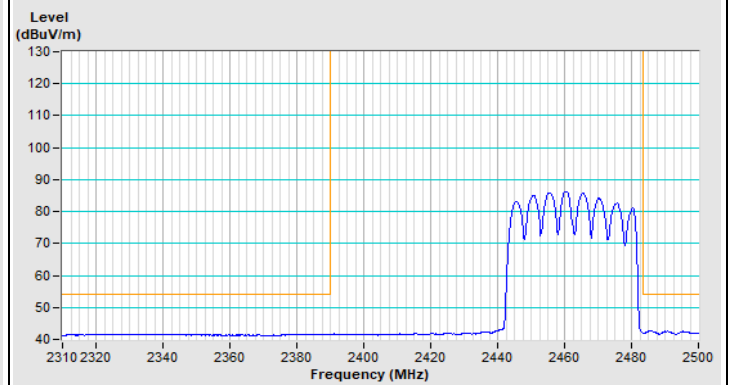

Horizontal (Average)

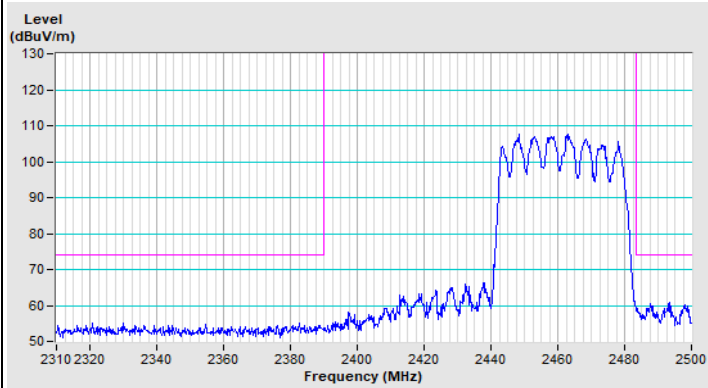


Vertical (Peak)

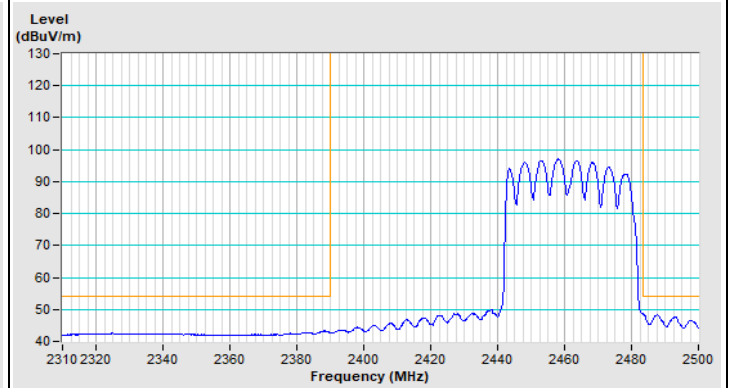





Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) 26-tone RU Channel 1

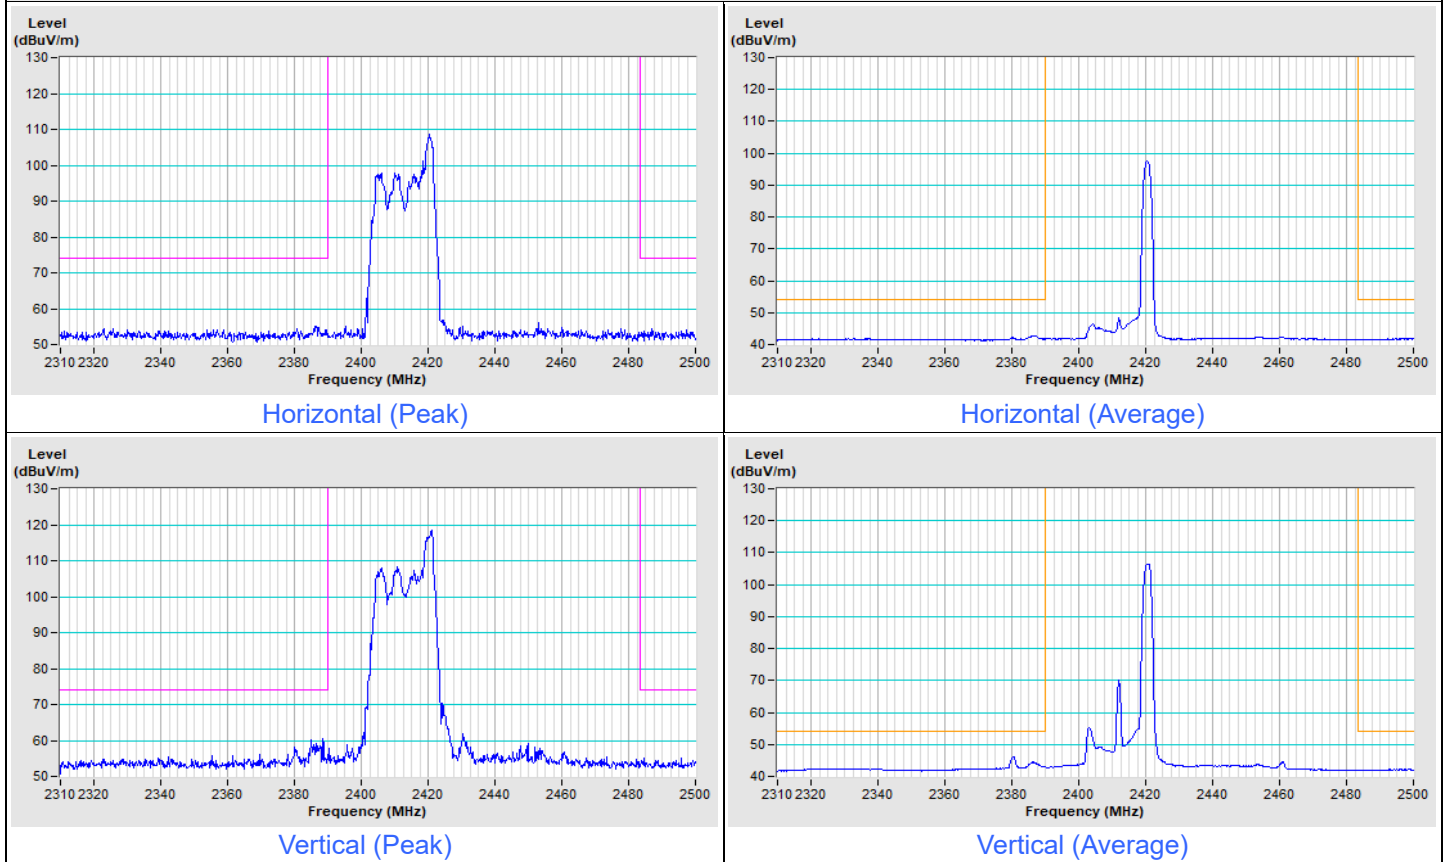


802.11be (EHT20) 26-tone RU Channel 11

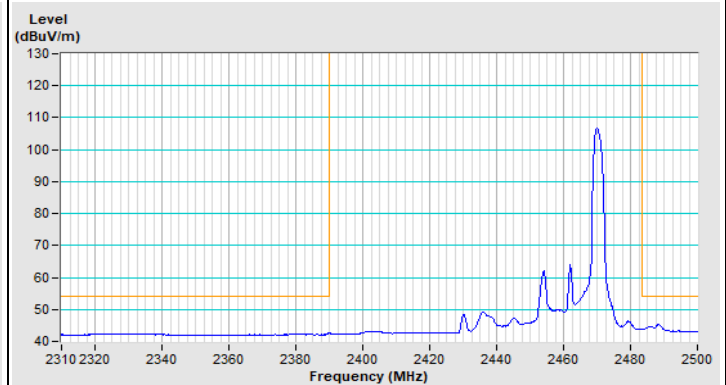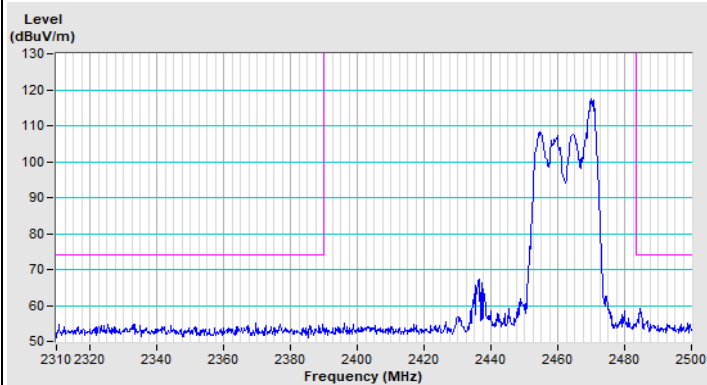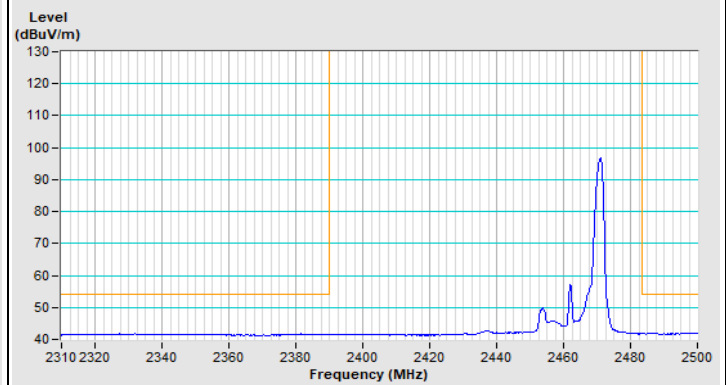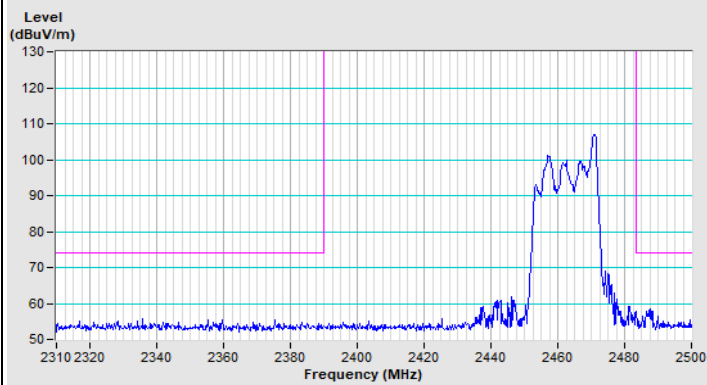


802.11be (EHT20) 26-tone RU Channel 12

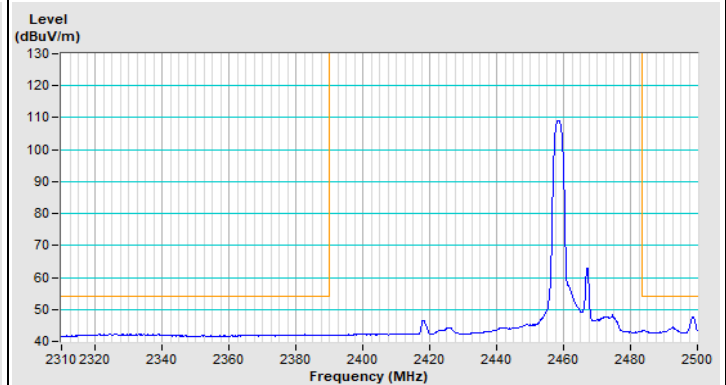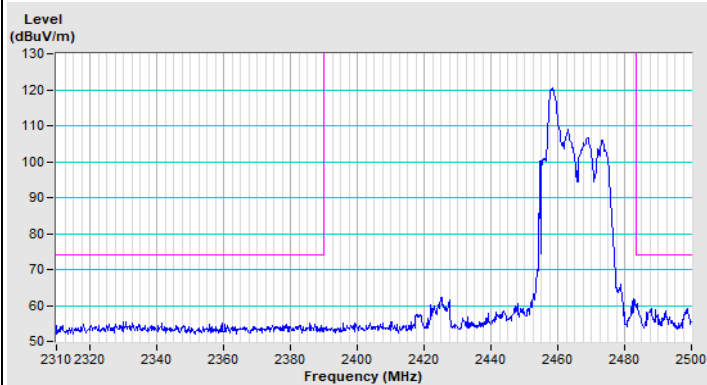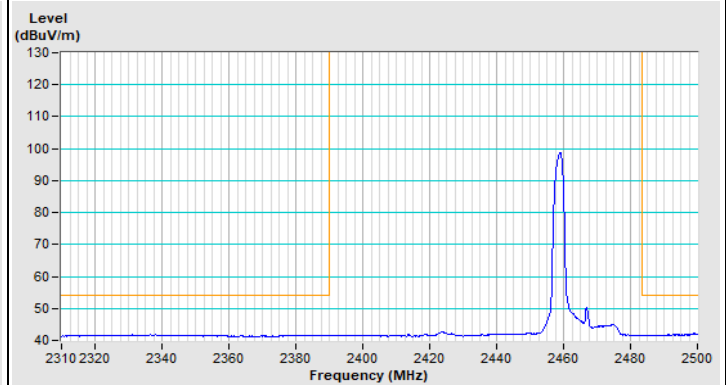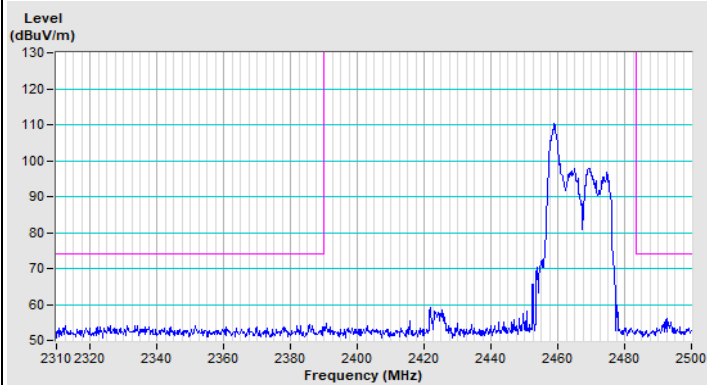


802.11be (EHT20) 26-tone RU Channel 13

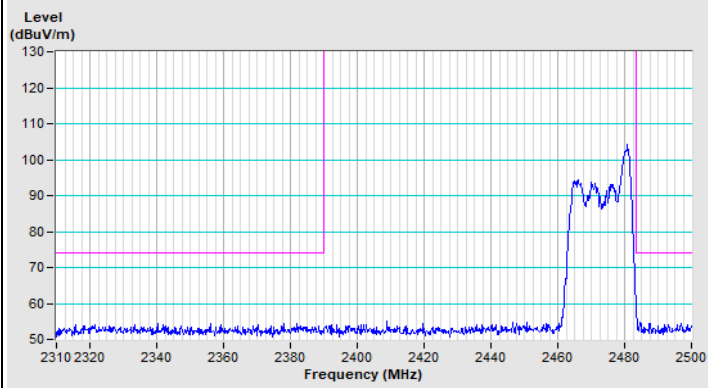


Horizontal (Peak)

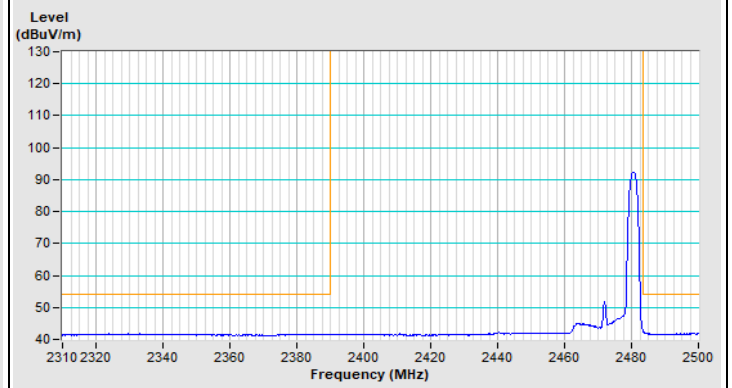

Horizontal (Average)

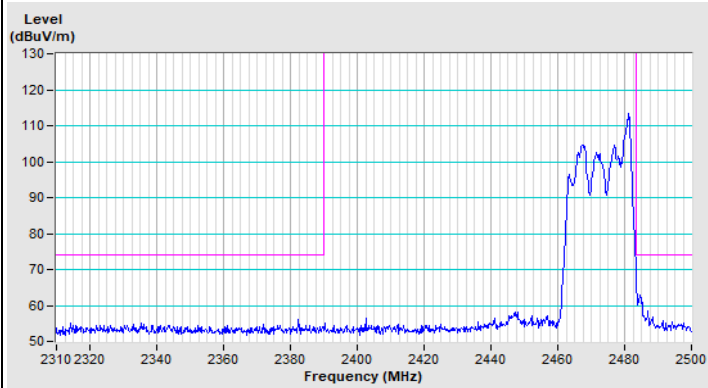


Vertical (Peak)

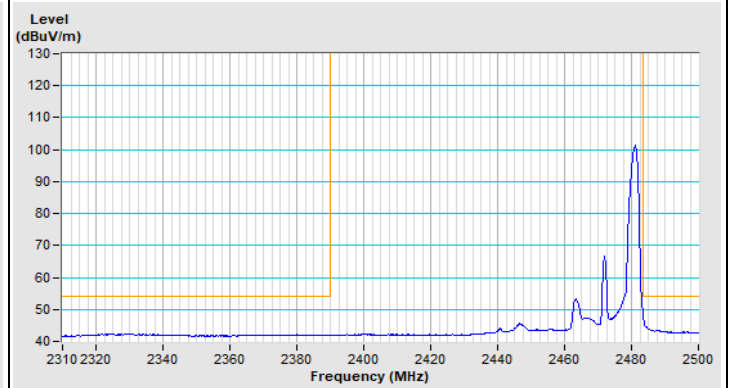


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

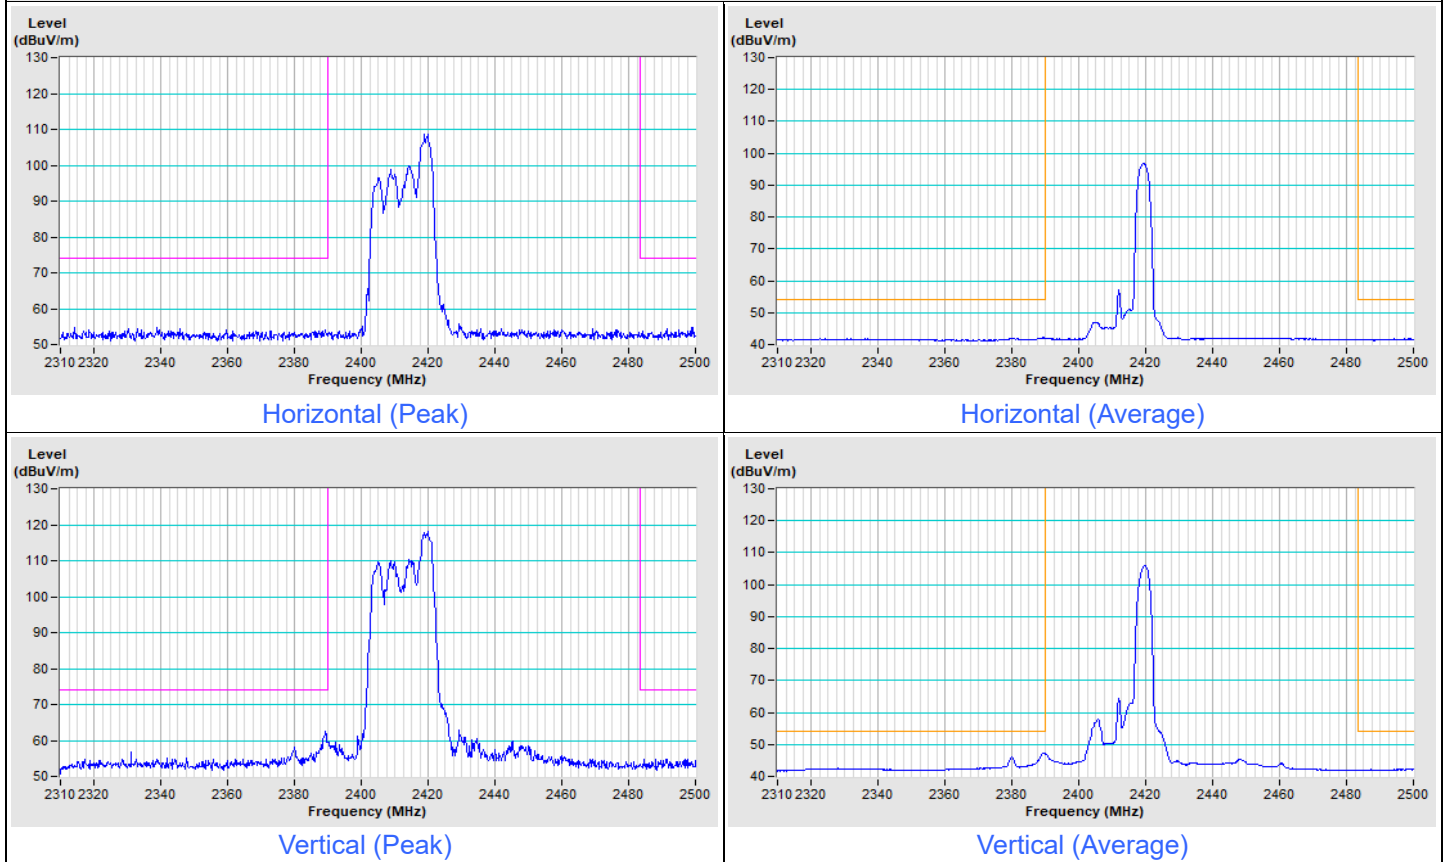


802.11be (EHT20) 52-tone RU Channel 11

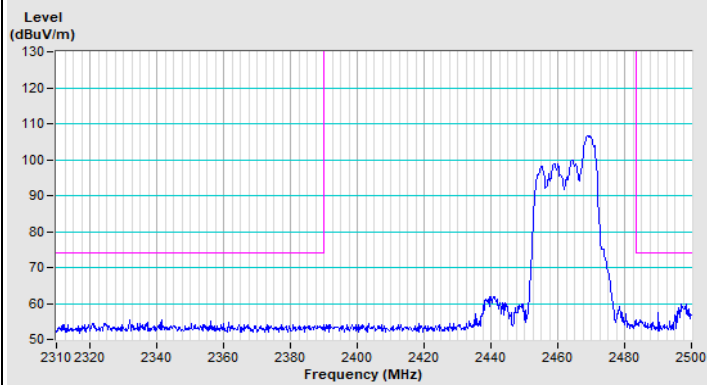


Horizontal (Peak)

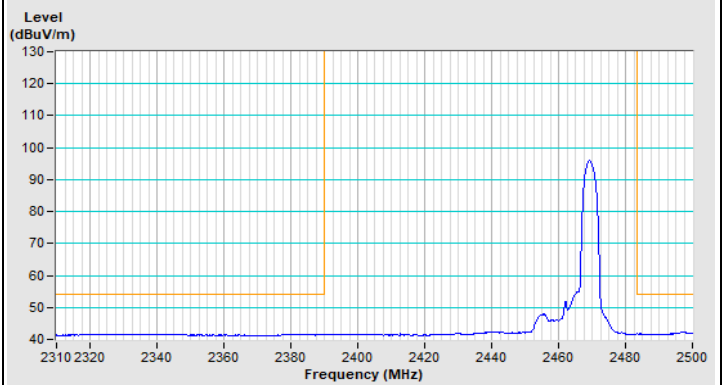

Horizontal (Average)

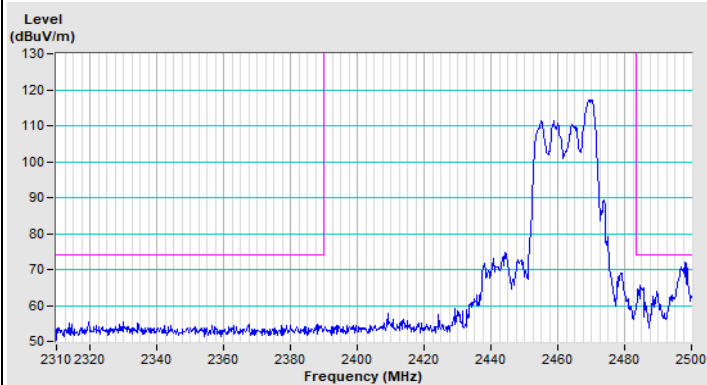


Vertical (Peak)

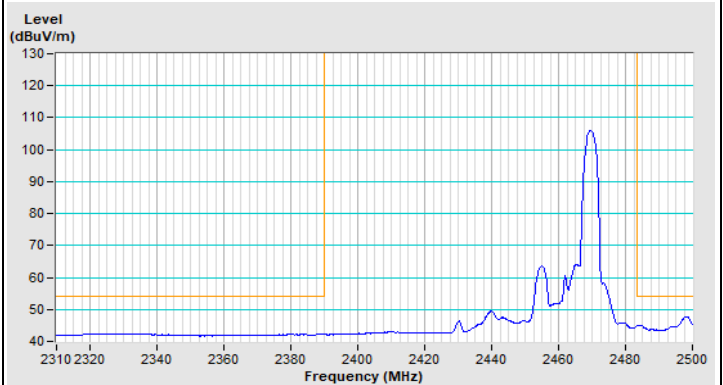


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 12

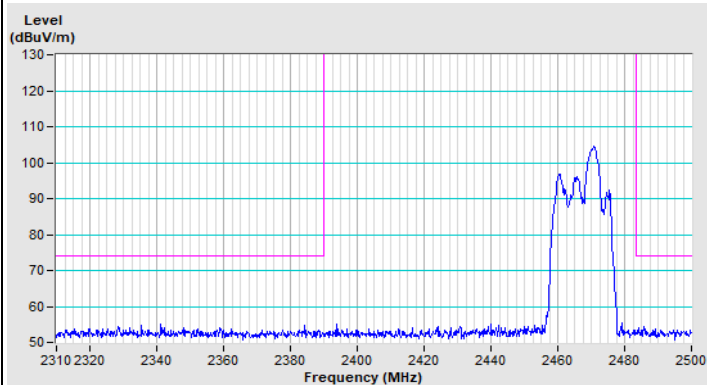


Horizontal (Peak)

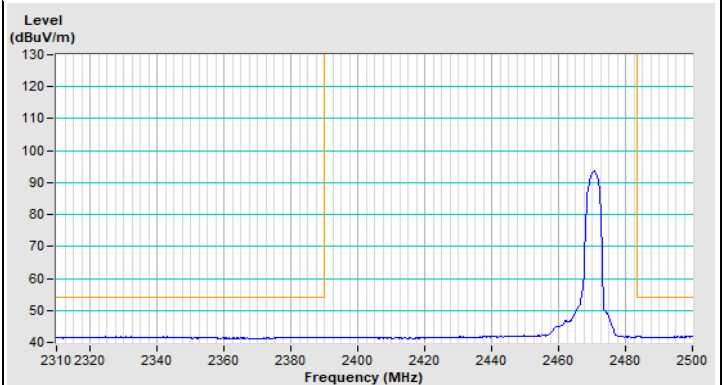

Horizontal (Average)

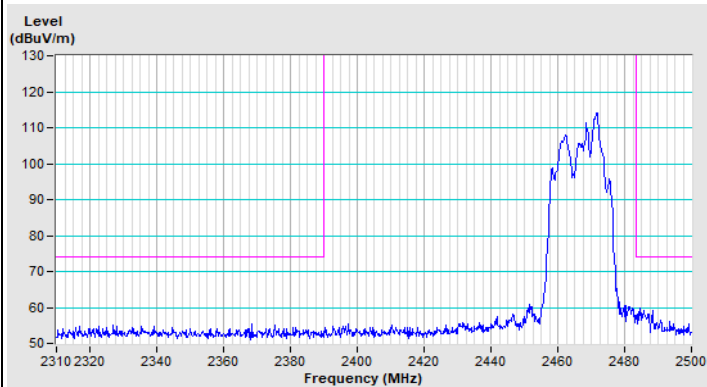


Vertical (Peak)

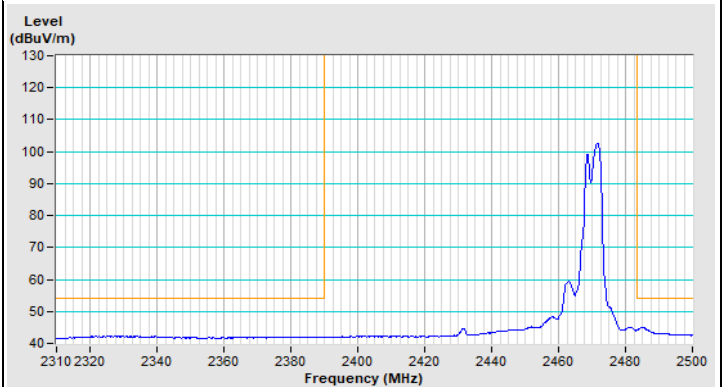


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 13

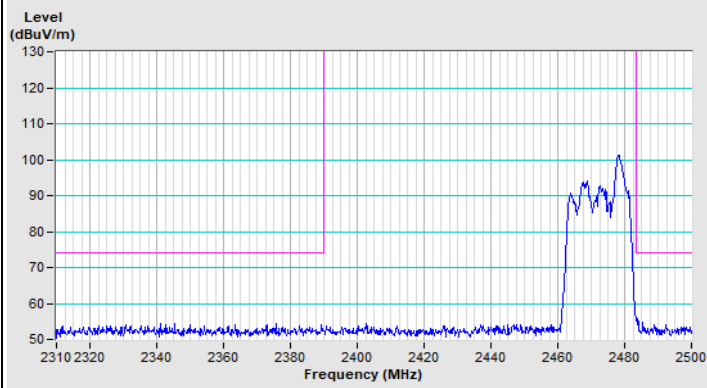


Horizontal (Peak)

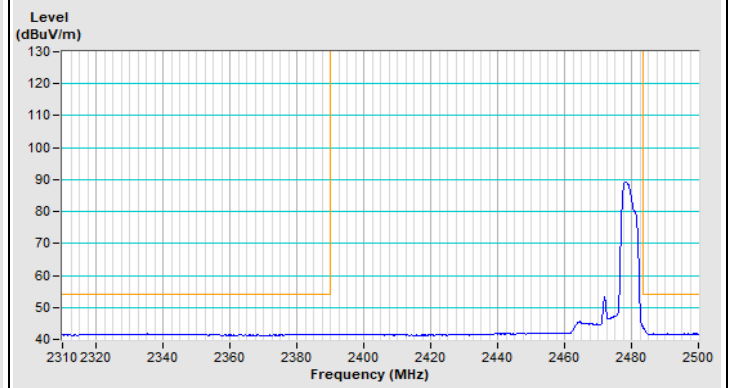

Horizontal (Average)

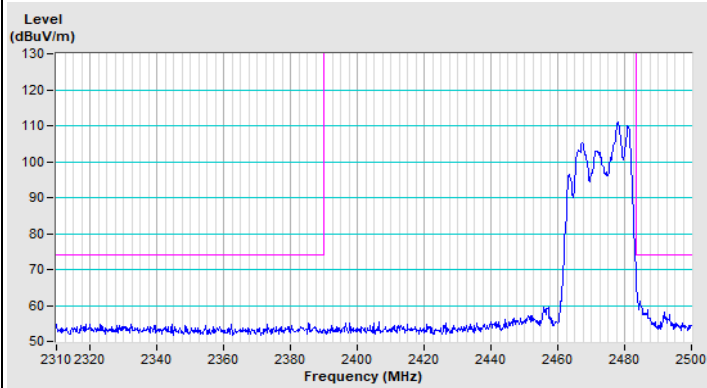


Vertical (Peak)

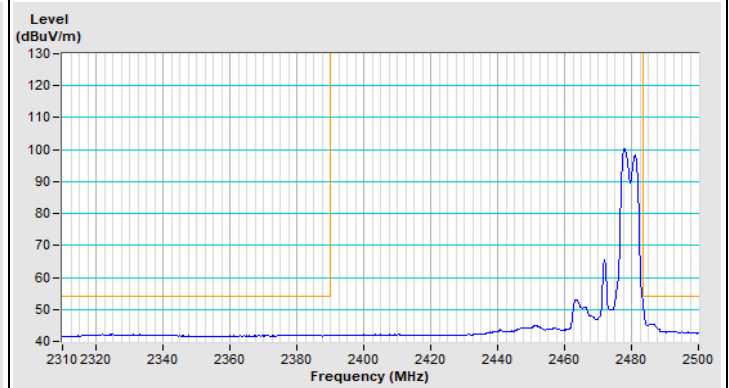





Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) 106-tone RU Channel 1

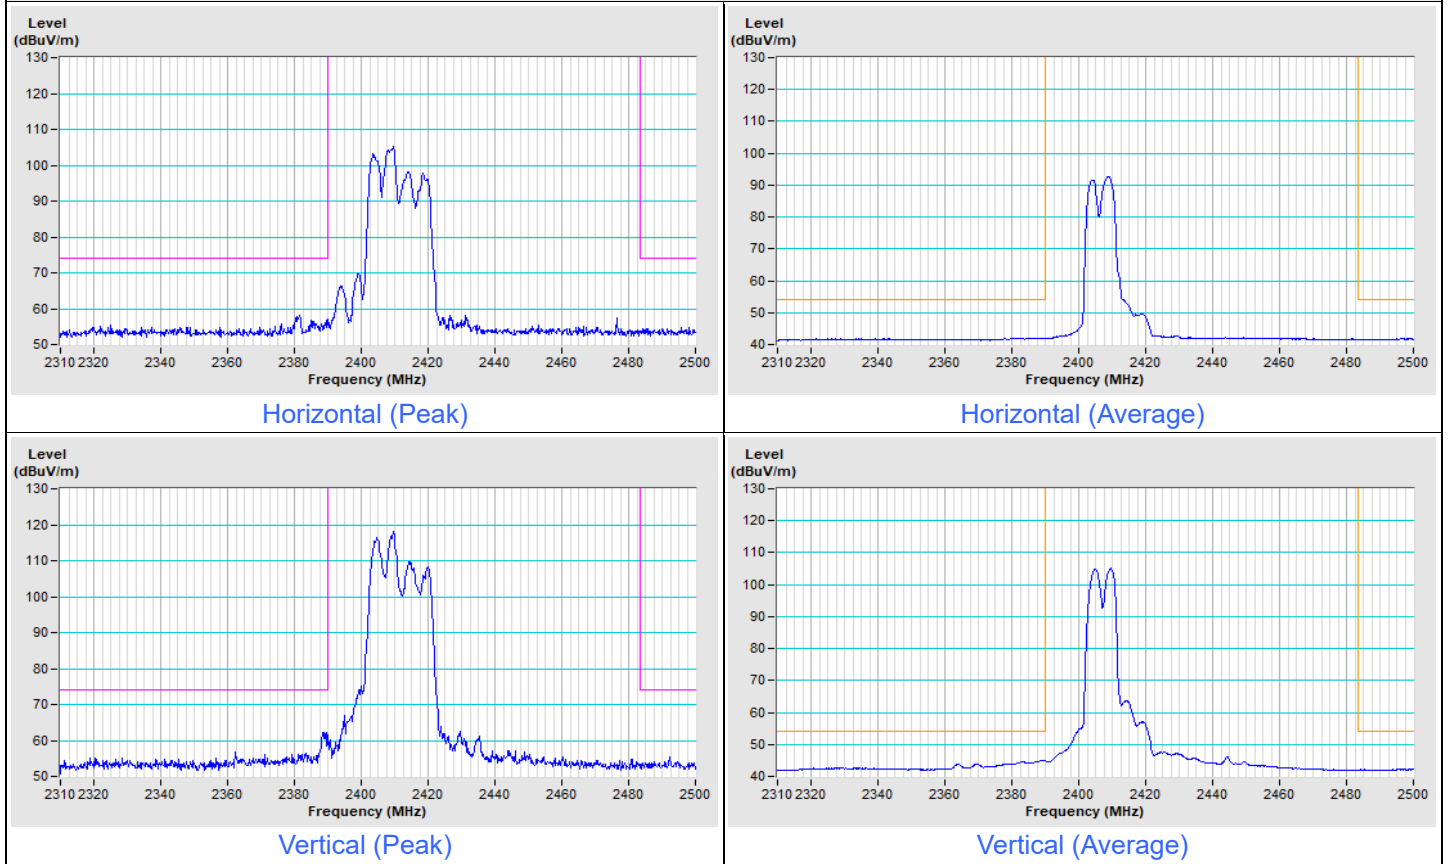


802.11be (EHT20) 106-tone RU Channel 11

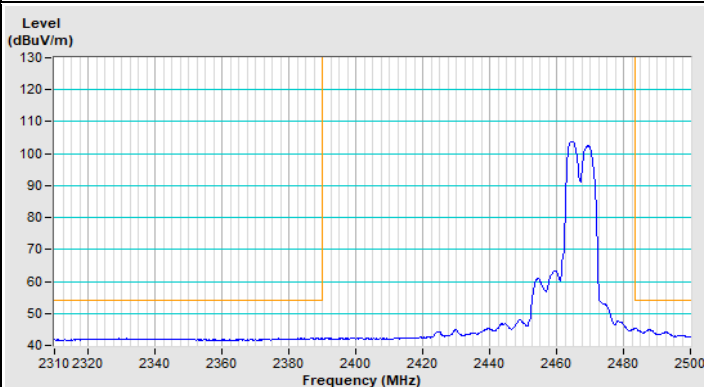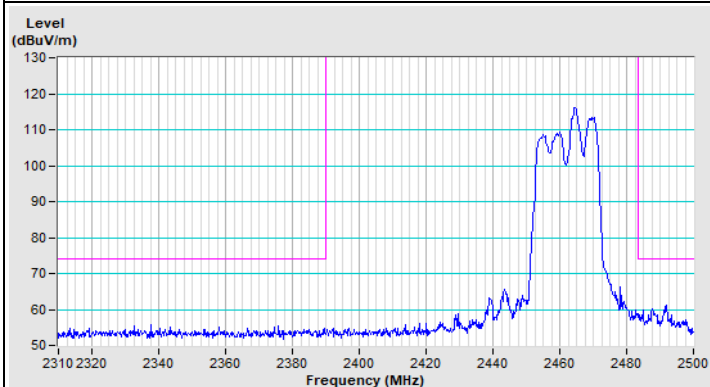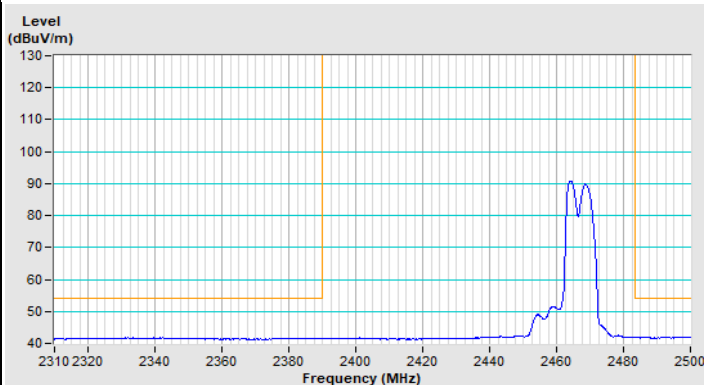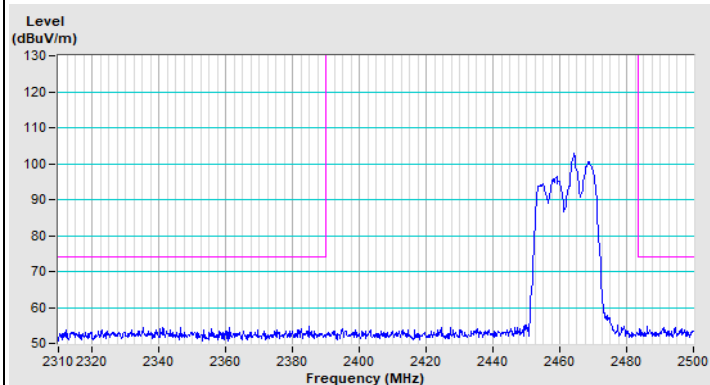


802.11be (EHT20) 106-tone RU Channel 12

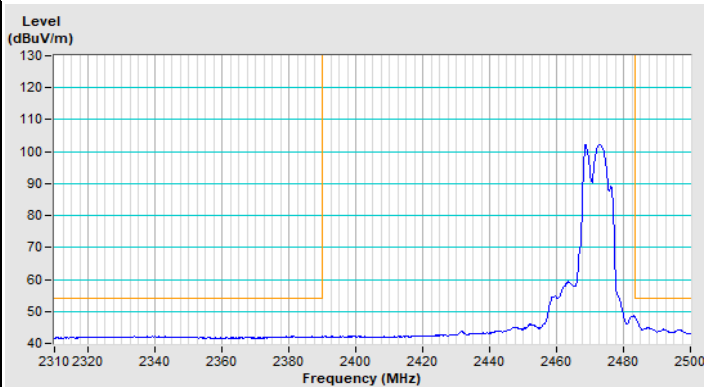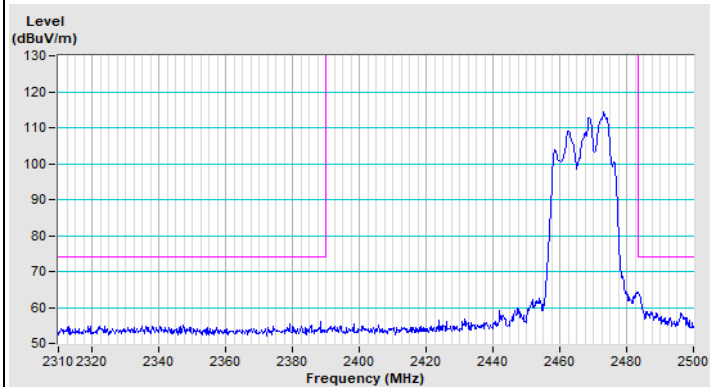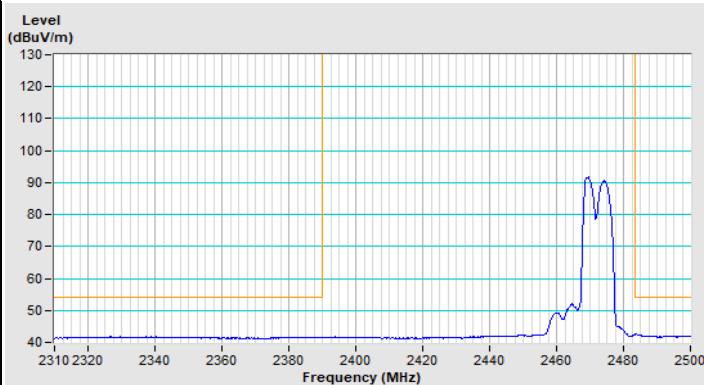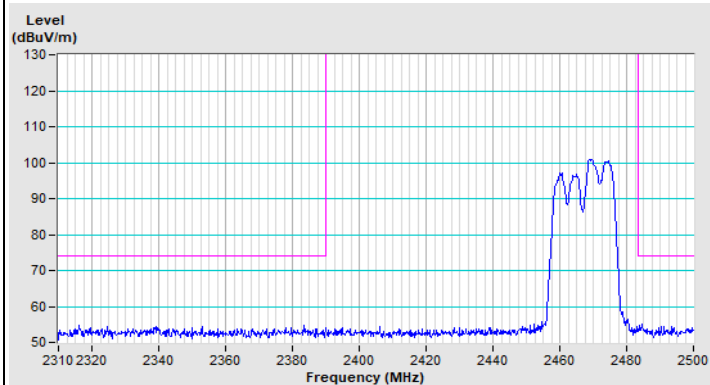


802.11be (EHT20) 106-tone RU Channel 13

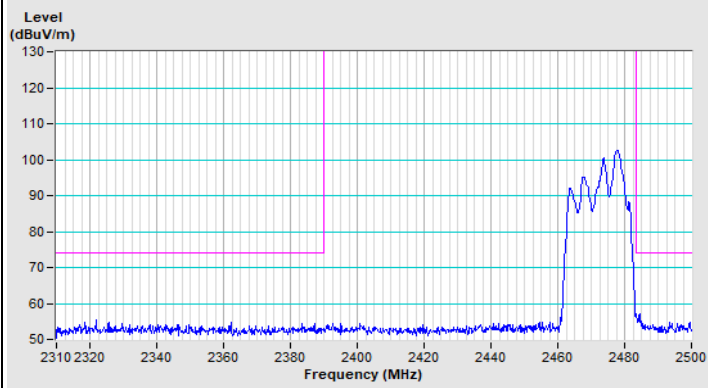


Horizontal (Peak)

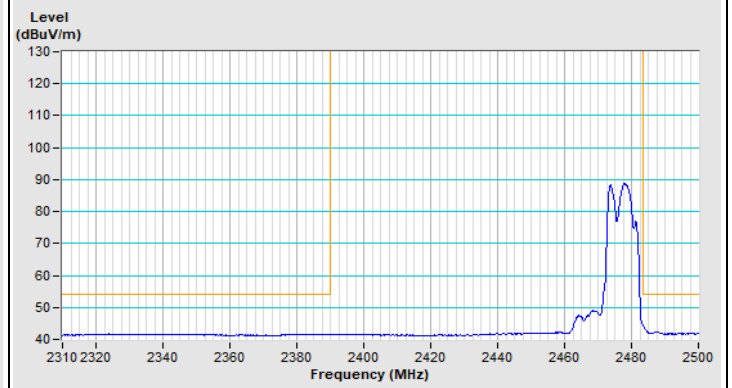

Horizontal (Average)

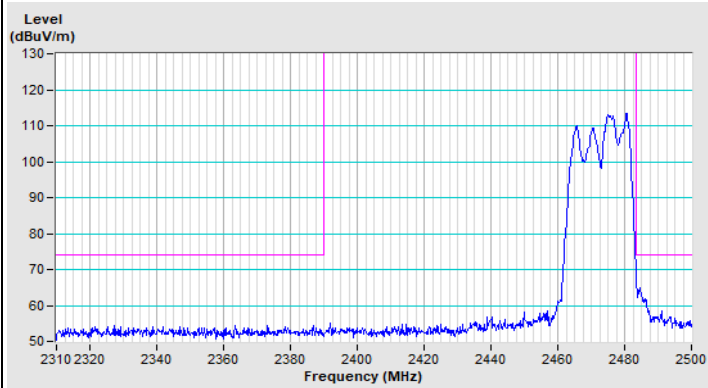

Vertical (Peak)

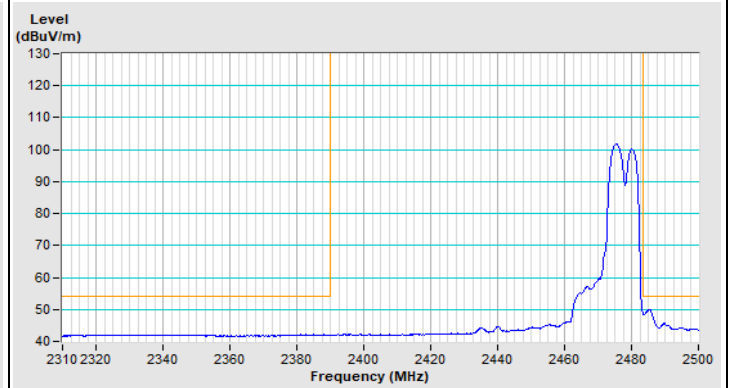

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---