

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5619.73	51.8 PK	68.2	-16.4	2.38 H	138	45.7	6.1
2	*5745.00	107.0 PK			2.38 H	138	100.7	6.3
3	*5745.00	96.6 AV			2.38 H	138	90.3	6.3
4	#5940.07	51.6 PK	68.2	-16.6	2.38 H	138	44.9	6.7
5	11490.00	50.3 PK	74.0	-23.7	1.54 H	238	33.3	17.0
6	11490.00	39.1 AV	54.0	-14.9	1.54 H	238	22.1	17.0
7	#17235.00	57.6 PK	68.2	-10.6	1.95 H	264	37.1	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5628.23	52.2 PK	68.2	-16.0	3.47 V	265	46.1	6.1
2	*5745.00	121.5 PK			3.47 V	265	115.2	6.3
3	*5745.00	110.4 AV			3.47 V	265	104.1	6.3
4	#5938.04	52.1 PK	68.2	-16.1	3.47 V	265	45.3	6.8
5	11490.00	51.2 PK	74.0	-22.8	1.76 V	162	34.2	17.0
6	11490.00	40.0 AV	54.0	-14.0	1.76 V	162	23.0	17.0
7	#17235.00	57.8 PK	68.2	-10.4	1.13 V	226	37.3	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5626.77	52.9 PK	68.2	-15.3	2.71 H	155	46.8	6.1
2	*5825.00	109.8 PK			2.71 H	155	103.1	6.7
3	*5825.00	98.9 AV			2.71 H	155	92.2	6.7
4	#5929.37	53.7 PK	68.2	-14.5	2.71 H	155	46.9	6.8
5	11650.00	50.4 PK	74.0	-23.6	1.57 H	249	33.6	16.8
6	11650.00	39.6 AV	54.0	-14.4	1.57 H	249	22.8	16.8
7	#17475.00	57.6 PK	68.2	-10.6	2.03 H	242	34.8	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5608.14	52.8 PK	68.2	-15.4	3.48 V	262	46.7	6.1
2	*5825.00	120.4 PK			3.48 V	262	113.7	6.7
3	*5825.00	110.1 AV			3.48 V	262	103.4	6.7
4	#5829.04	53.5 PK	68.2	-14.7	3.48 V	262	46.9	6.6
5	11650.00	51.4 PK	74.0	-22.6	1.81 V	154	34.6	16.8
6	11650.00	40.0 AV	54.0	-14.0	1.81 V	154	23.2	16.8
7	#17475.00	58.5 PK	68.2	-9.7	1.09 V	215	35.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.2 PK	74.0	-21.8	1.36 H	227	46.2	6.0
2	5150.00	41.1 AV	54.0	-12.9	1.36 H	227	35.1	6.0
3	*5180.00	103.0 PK			1.36 H	227	97.1	5.9
4	*5180.00	93.5 AV			1.36 H	227	87.6	5.9
5	#10360.00	50.8 PK	68.2	-17.4	2.02 H	199	34.9	15.9
6	15540.00	64.2 PK	74.0	-9.8	1.90 H	257	47.3	16.9
7	15540.00	48.4 AV	54.0	-5.6	1.90 H	257	31.5	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.6 PK	74.0	-8.4	1.15 V	94	59.6	6.0
2	5150.00	46.0 AV	54.0	-8.0	1.15 V	94	40.0	6.0
3	*5180.00	115.2 PK			1.15 V	94	109.3	5.9
4	*5180.00	104.0 AV			1.15 V	94	98.1	5.9
5	#10360.00	52.7 PK	68.2	-15.5	1.53 V	169	36.8	15.9
6	15540.00	62.4 PK	74.0	-11.6	2.03 V	308	45.5	16.9
7	15540.00	47.3 AV	54.0	-6.7	2.03 V	308	30.4	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	105.0 PK			1.37 H	215	99.4	5.6
2	*5240.00	95.5 AV			1.37 H	215	89.9	5.6
3	5350.00	52.5 PK	74.0	-21.5	1.37 H	215	46.6	5.9
4	5350.00	41.5 AV	54.0	-12.5	1.37 H	215	35.6	5.9
5	#10480.00	50.7 PK	68.2	-17.5	2.01 H	197	34.7	16.0
6	15720.00	62.5 PK	74.0	-11.5	1.85 H	277	45.3	17.2
7	15720.00	49.8 AV	54.0	-4.2	1.85 H	277	32.6	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	117.3 PK			1.18 V	89	111.7	5.6
2	*5240.00	106.0 AV			1.18 V	89	100.4	5.6
3	5350.00	63.3 PK	74.0	-10.7	1.18 V	89	57.4	5.9
4	5350.00	44.3 AV	54.0	-9.7	1.18 V	89	38.4	5.9
5	#10480.00	51.0 PK	68.2	-17.2	1.59 V	169	35.0	16.0
6	15720.00	62.4 PK	74.0	-11.6	2.10 V	310	45.2	17.2
7	15720.00	48.9 AV	54.0	-5.1	2.10 V	310	31.7	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.1 PK	74.0	-21.9	1.40 H	236	46.1	6.0
2	5150.00	41.2 AV	54.0	-12.8	1.40 H	236	35.2	6.0
3	*5260.00	105.5 PK			1.40 H	236	100.0	5.5
4	*5260.00	96.0 AV			1.40 H	236	90.5	5.5
5	#10520.00	49.9 PK	68.2	-18.3	2.02 H	218	34.0	15.9
6	15780.00	59.3 PK	74.0	-14.7	1.96 H	255	42.2	17.1
7	15780.00	42.6 AV	54.0	-11.4	1.96 H	255	25.5	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.5 PK	74.0	-11.5	1.12 V	84	56.5	6.0
2	5150.00	43.8 AV	54.0	-10.2	1.12 V	84	37.8	6.0
3	*5260.00	117.5 PK			1.12 V	84	112.0	5.5
4	*5260.00	106.3 AV			1.12 V	84	100.8	5.5
5	#10520.00	50.1 PK	68.2	-18.1	1.63 V	173	34.2	15.9
6	15780.00	60.2 PK	74.0	-13.8	2.04 V	308	43.1	17.1
7	15780.00	43.7 AV	54.0	-10.3	2.04 V	308	26.6	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	103.5 PK			1.25 H	219	97.9	5.6
2	*5320.00	92.8 AV			1.25 H	219	87.2	5.6
3	5350.00	53.6 PK	74.0	-20.4	1.25 H	219	47.7	5.9
4	5350.00	40.5 AV	54.0	-13.5	1.25 H	219	34.6	5.9
5	10640.00	49.5 PK	74.0	-24.5	2.09 H	225	33.1	16.4
6	10640.00	36.6 AV	54.0	-17.4	2.09 H	225	20.2	16.4
7	15960.00	58.8 PK	74.0	-15.2	1.94 H	256	41.6	17.2
8	15960.00	45.4 AV	54.0	-8.6	1.94 H	256	28.2	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	114.4 PK			1.17 V	80	108.8	5.6
2	*5320.00	102.3 AV			1.17 V	80	96.7	5.6
3	5350.00	63.0 PK	74.0	-11.0	1.17 V	80	57.1	5.9
4	5350.00	44.0 AV	54.0	-10.0	1.17 V	80	38.1	5.9
5	10640.00	50.0 PK	74.0	-24.0	1.56 V	152	33.6	16.4
6	10640.00	37.0 AV	54.0	-17.0	1.56 V	152	20.6	16.4
7	15960.00	58.9 PK	74.0	-15.1	2.15 V	318	41.7	17.2
8	15960.00	42.2 AV	54.0	-11.8	2.15 V	318	25.0	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.0 PK	74.0	-18.0	1.08 H	229	50.0	6.0
2	5460.00	40.2 AV	54.0	-13.8	1.08 H	229	34.2	6.0
3	#5470.00	55.2 PK	68.2	-13.0	1.08 H	229	49.2	6.0
4	*5500.00	103.9 PK			1.08 H	229	97.9	6.0
5	*5500.00	93.1 AV			1.08 H	229	87.1	6.0
6	11000.00	50.6 PK	74.0	-23.4	2.03 H	200	33.7	16.9
7	11000.00	37.9 AV	54.0	-16.1	2.03 H	200	21.0	16.9
8	#16500.00	54.3 PK	68.2	-13.9	1.91 H	274	34.7	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.5 PK	74.0	-17.5	1.83 V	271	50.5	6.0
2	5460.00	43.0 AV	54.0	-11.0	1.83 V	271	37.0	6.0
3	#5470.00	63.3 PK	68.2	-4.9	1.83 V	271	57.3	6.0
4	*5500.00	114.4 PK			1.83 V	271	108.4	6.0
5	*5500.00	102.7 AV			1.83 V	271	96.7	6.0
6	11000.00	49.0 PK	74.0	-25.0	1.57 V	146	32.1	16.9
7	11000.00	36.6 AV	54.0	-17.4	1.57 V	146	19.7	16.9
8	#16500.00	53.6 PK	68.2	-14.6	2.05 V	313	34.0	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	100.1 PK			2.11 H	255	94.0	6.1
2	*5700.00	90.2 AV			2.11 H	255	84.1	6.1
3	#5725.00	53.0 PK	68.2	-15.2	2.11 H	255	46.8	6.2
4	11400.00	50.5 PK	74.0	-23.5	2.09 H	197	33.6	16.9
5	11400.00	37.5 AV	54.0	-16.5	2.09 H	197	20.6	16.9
6	#17100.00	54.6 PK	68.2	-13.6	1.94 H	284	34.4	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.3 PK			1.35 V	101	106.2	6.1
2	*5700.00	101.1 AV			1.35 V	101	95.0	6.1
3	#5725.00	53.8 PK	68.2	-14.4	1.35 V	101	47.6	6.2
4	11400.00	49.5 PK	74.0	-24.5	1.63 V	173	32.6	16.9
5	11400.00	37.1 AV	54.0	-16.9	1.63 V	173	20.2	16.9
6	#17100.00	54.3 PK	68.2	-13.9	2.08 V	301	34.1	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.3 PK	74.0	-21.7	2.03 H	249	46.3	6.0
2	5460.00	39.6 AV	54.0	-14.4	2.03 H	249	33.6	6.0
3	#5470.00	53.3 PK	68.2	-14.9	2.03 H	249	47.3	6.0
4	*5720.00	106.1 PK			2.03 H	249	99.9	6.2
5	*5720.00	96.3 AV			2.03 H	249	90.1	6.2
6	#5850.00	53.0 PK	68.2	-15.2	2.03 H	249	46.4	6.6
7	11440.00	50.1 PK	74.0	-23.9	2.07 H	209	33.2	16.9
8	11440.00	36.9 AV	54.0	-17.1	2.07 H	209	20.0	16.9
9	#17160.00	53.2 PK	68.2	-15.0	1.85 H	263	33.2	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.4 PK	74.0	-21.6	1.41 V	90	46.4	6.0
2	5460.00	39.9 AV	54.0	-14.1	1.41 V	90	33.9	6.0
3	#5470.00	52.8 PK	68.2	-15.4	1.41 V	90	46.8	6.0
4	*5720.00	118.4 PK			1.41 V	90	112.2	6.2
5	*5720.00	107.2 AV			1.41 V	90	101.0	6.2
6	#5850.00	53.2 PK	68.2	-15.0	1.41 V	90	46.6	6.6
7	11440.00	50.0 PK	74.0	-24.0	1.64 V	149	33.1	16.9
8	11440.00	37.0 AV	54.0	-17.0	1.64 V	149	20.1	16.9
9	#17160.00	54.3 PK	68.2	-13.9	2.08 V	320	34.3	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.56	51.5 PK	68.2	-16.7	2.85 H	139	45.4	6.1
2	*5745.00	106.2 PK			2.85 H	139	99.9	6.3
3	*5745.00	95.5 AV			2.85 H	139	89.2	6.3
4	#5936.33	52.7 PK	68.2	-15.5	2.85 H	139	45.9	6.8
5	11490.00	50.0 PK	74.0	-24.0	1.63 H	224	33.0	17.0
6	11490.00	39.1 AV	54.0	-14.9	1.63 H	224	22.1	17.0
7	#17235.00	57.9 PK	68.2	-10.3	2.02 H	240	37.4	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5611.51	53.4 PK	68.2	-14.8	1.71 V	264	47.3	6.1
2	*5745.00	117.9 PK			1.71 V	264	111.6	6.3
3	*5745.00	108.1 AV			1.71 V	264	101.8	6.3
4	#5942.22	53.1 PK	68.2	-15.1	1.71 V	264	46.4	6.7
5	11490.00	51.3 PK	74.0	-22.7	1.75 V	176	34.3	17.0
6	11490.00	40.1 AV	54.0	-13.9	1.75 V	176	23.1	17.0
7	#17235.00	58.4 PK	68.2	-9.8	1.05 V	233	37.9	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5607.95	51.2 PK	68.2	-17.0	2.69 H	154	45.1	6.1
2	*5825.00	104.5 PK			2.69 H	154	97.8	6.7
3	*5825.00	94.9 AV			2.69 H	154	88.2	6.7
4	#5953.44	51.8 PK	68.2	-16.4	2.69 H	154	45.1	6.7
5	11650.00	50.8 PK	74.0	-23.2	1.62 H	225	34.0	16.8
6	11650.00	39.7 AV	54.0	-14.3	1.62 H	225	22.9	16.8
7	#17475.00	56.9 PK	68.2	-11.3	1.99 H	247	34.1	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5611.58	52.9 PK	68.2	-15.3	1.74 V	90	46.8	6.1
2	*5825.00	118.8 PK			1.74 V	90	112.1	6.7
3	*5825.00	108.6 AV			1.74 V	90	101.9	6.7
4	#5949.11	53.3 PK	68.2	-14.9	1.74 V	90	46.6	6.7
5	11650.00	52.0 PK	74.0	-22.0	1.82 V	154	35.2	16.8
6	11650.00	40.4 AV	54.0	-13.6	1.82 V	154	23.6	16.8
7	#17475.00	58.3 PK	68.2	-9.9	1.08 V	207	35.5	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5123.00	59.3 PK	74.0	-14.7	1.43 H	225	53.2	6.1
2	5123.00	44.8 AV	54.0	-9.2	1.43 H	225	38.7	6.1
3	*5210.00	97.4 PK			1.43 H	225	91.7	5.7
4	*5210.00	85.5 AV			1.43 H	225	79.8	5.7
5	5350.00	53.0 PK	74.0	-21.0	1.43 H	225	47.1	5.9
6	5350.00	40.4 AV	54.0	-13.6	1.43 H	225	34.5	5.9
7	#10420.00	50.1 PK	68.2	-18.1	2.01 H	219	34.0	16.1
8	15630.00	65.0 PK	74.0	-9.0	1.86 H	284	48.0	17.0
9	15630.00	48.8 AV	54.0	-5.2	1.86 H	284	31.8	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.5 PK	74.0	-5.5	1.42 V	106	62.5	6.0
2	5150.00	52.3 AV	54.0	-1.7	1.42 V	106	46.3	6.0
3	*5210.00	104.2 PK			1.42 V	106	98.5	5.7
4	*5210.00	94.9 AV			1.42 V	106	89.2	5.7
5	5350.00	59.2 PK	74.0	-14.8	1.42 V	106	53.3	5.9
6	5350.00	43.1 AV	54.0	-10.9	1.42 V	106	37.2	5.9
7	#10420.00	51.9 PK	68.2	-16.3	1.61 V	170	35.8	16.1
8	15630.00	60.9 PK	74.0	-13.1	2.08 V	321	43.9	17.0
9	15630.00	45.7 AV	54.0	-8.3	2.08 V	321	28.7	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.2 PK	74.0	-21.8	1.18 H	226	46.2	6.0
2	5150.00	40.7 AV	54.0	-13.3	1.18 H	226	34.7	6.0
3	*5290.00	96.5 PK			1.18 H	226	91.1	5.4
4	*5290.00	85.3 AV			1.18 H	226	79.9	5.4
5	5350.00	60.5 PK	74.0	-13.5	1.18 H	226	54.6	5.9
6	5350.00	44.9 AV	54.0	-9.1	1.18 H	226	39.0	5.9
7	#10580.00	48.7 PK	68.2	-19.5	2.09 H	219	32.4	16.3
8	15870.00	60.6 PK	74.0	-13.4	1.89 H	262	43.3	17.3
9	15870.00	44.0 AV	54.0	-10.0	1.89 H	262	26.7	17.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.1 PK	74.0	-17.9	1.28 V	79	50.1	6.0
2	5150.00	42.5 AV	54.0	-11.5	1.28 V	79	36.5	6.0
3	*5290.00	105.1 PK			1.28 V	79	99.7	5.4
4	*5290.00	93.8 AV			1.28 V	79	88.4	5.4
5	5350.00	68.5 PK	74.0	-5.5	1.28 V	79	62.6	5.9
6	5350.00	52.3 AV	54.0	-1.7	1.28 V	79	46.4	5.9
7	#10580.00	50.1 PK	68.2	-18.1	1.57 V	149	33.8	16.3
8	15870.00	60.0 PK	74.0	-14.0	2.06 V	319	42.7	17.3
9	15870.00	43.7 AV	54.0	-10.3	2.06 V	319	26.4	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.8 PK	74.0	-17.2	1.06 H	227	50.8	6.0
2	5460.00	41.3 AV	54.0	-12.7	1.06 H	227	35.3	6.0
3	#5470.00	57.0 PK	68.2	-11.2	1.06 H	227	51.0	6.0
4	*5530.00	95.3 PK			1.06 H	227	89.3	6.0
5	*5530.00	84.3 AV			1.06 H	227	78.3	6.0
6	#5725.00	52.6 PK	68.2	-15.6	1.06 H	227	46.4	6.2
7	11060.00	49.5 PK	74.0	-24.5	2.10 H	222	32.6	16.9
8	11060.00	36.7 AV	54.0	-17.3	2.10 H	222	19.8	16.9
9	#16590.00	54.3 PK	68.2	-13.9	1.85 H	279	33.9	20.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.6 PK	74.0	-8.4	1.57 V	98	59.6	6.0
2	5460.00	47.9 AV	54.0	-6.1	1.57 V	98	41.9	6.0
3	#5470.00	66.4 PK	68.2	-1.8	1.57 V	98	60.4	6.0
4	*5530.00	106.4 PK			1.57 V	98	100.4	6.0
5	*5530.00	93.6 AV			1.57 V	98	87.6	6.0
6	#5725.00	52.9 PK	68.2	-15.3	1.57 V	98	46.7	6.2
7	11060.00	49.9 PK	74.0	-24.1	1.62 V	170	33.0	16.9
8	11060.00	37.1 AV	54.0	-16.9	1.62 V	170	20.2	16.9
9	#16590.00	54.4 PK	68.2	-13.8	2.08 V	321	34.0	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	95.5 PK			1.96 H	264	89.6	5.9
2	*5610.00	84.8 AV			1.96 H	264	78.9	5.9
3	#5725.00	57.5 PK	68.2	-10.7	1.96 H	264	51.3	6.2
4	11220.00	50.0 PK	74.0	-24.0	2.06 H	224	33.3	16.7
5	11220.00	37.1 AV	54.0	-16.9	2.06 H	224	20.4	16.7
6	#16830.00	55.2 PK	68.2	-13.0	1.88 H	280	34.0	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	108.1 PK			1.26 V	91	102.2	5.9
2	*5610.00	96.5 AV			1.26 V	91	90.6	5.9
3	#5725.00	66.4 PK	68.2	-1.8	1.26 V	91	60.2	6.2
4	11220.00	50.6 PK	74.0	-23.4	1.61 V	159	33.9	16.7
5	11220.00	37.3 AV	54.0	-16.7	1.61 V	159	20.6	16.7
6	#16830.00	53.6 PK	68.2	-14.6	2.10 V	292	32.4	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.0 PK	74.0	-20.0	1.74 H	264	48.0	6.0
2	5460.00	40.1 AV	54.0	-13.9	1.74 H	264	34.1	6.0
3	#5470.00	52.0 PK	68.2	-16.2	1.74 H	264	46.0	6.0
4	*5690.00	97.9 PK			1.74 H	264	91.8	6.1
5	*5690.00	86.4 AV			1.74 H	264	80.3	6.1
6	#5850.00	54.0 PK	68.2	-14.2	1.74 H	264	47.4	6.6
7	11380.00	50.6 PK	74.0	-23.4	2.02 H	199	33.6	17.0
8	11380.00	38.1 AV	54.0	-15.9	2.02 H	199	21.1	17.0
9	#17070.00	53.9 PK	68.2	-14.3	1.86 H	284	33.5	20.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.4 PK	74.0	-13.6	1.21 V	85	54.4	6.0
2	5460.00	42.3 AV	54.0	-11.7	1.21 V	85	36.3	6.0
3	#5470.00	62.8 PK	68.2	-5.4	1.21 V	85	56.8	6.0
4	*5690.00	109.0 PK			1.21 V	85	102.9	6.1
5	*5690.00	97.8 AV			1.21 V	85	91.7	6.1
6	#5850.00	66.4 PK	68.2	-1.8	1.21 V	85	59.8	6.6
7	11380.00	49.0 PK	74.0	-25.0	1.57 V	144	32.0	17.0
8	11380.00	37.1 AV	54.0	-16.9	1.57 V	144	20.1	17.0
9	#17070.00	52.5 PK	68.2	-15.7	2.04 V	317	32.1	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5617.35	54.7 PK	68.2	-13.5	2.01 H	264	48.8	5.9
2	*5775.00	98.2 PK			2.01 H	264	91.7	6.5
3	*5775.00	86.0 AV			2.01 H	264	79.5	6.5
4	#5964.27	57.6 PK	68.2	-10.6	2.01 H	264	51.1	6.5
5	11550.00	50.2 PK	74.0	-23.8	2.01 H	215	33.2	17.0
6	11550.00	37.0 AV	54.0	-17.0	2.01 H	215	20.0	17.0
7	#17325.00	53.5 PK	68.2	-14.7	1.95 H	260	32.7	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5622.54	65.9 PK	68.2	-2.3	1.38 V	109	60.0	5.9
2	*5775.00	108.6 PK			1.38 V	109	102.1	6.5
3	*5775.00	96.9 AV			1.38 V	109	90.4	6.5
4	#5942.49	66.5 PK	68.2	-1.7	1.38 V	109	60.1	6.4
5	11550.00	48.0 PK	74.0	-26.0	1.54 V	161	31.0	17.0
6	11550.00	35.9 AV	54.0	-18.1	1.54 V	161	18.9	17.0
7	#17325.00	54.1 PK	68.2	-14.1	2.06 V	295	33.3	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.6 PK	74.0	-17.4	1.28 H	226	50.6	6.0
2	5150.00	45.0 AV	54.0	-9.0	1.28 H	226	39.0	6.0
3	*5250.00	90.0 PK			1.28 H	226	84.5	5.5
4	*5250.00	79.9 AV			1.28 H	226	74.4	5.5
5	5350.00	58.6 PK	74.0	-15.4	1.28 H	226	52.7	5.9
6	5350.00	43.2 AV	54.0	-10.8	1.28 H	226	37.3	5.9
7	#10500.00	49.5 PK	68.2	-18.7	2.06 H	199	33.6	15.9
8	15750.00	60.7 PK	74.0	-13.3	1.89 H	277	43.5	17.2
9	15750.00	44.2 AV	54.0	-9.8	1.89 H	277	27.0	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	1.17 V	95	59.1	6.0
2	5150.00	52.4 AV	54.0	-1.6	1.17 V	95	46.4	6.0
3	*5250.00	99.0 PK			1.17 V	95	93.5	5.5
4	*5250.00	88.7 AV			1.17 V	95	83.2	5.5
5	5350.00	67.0 PK	74.0	-7.0	1.17 V	95	61.1	5.9
6	5350.00	50.1 AV	54.0	-3.9	1.17 V	95	44.2	5.9
7	#10500.00	49.2 PK	68.2	-19.0	1.57 V	157	33.3	15.9
8	15750.00	60.3 PK	74.0	-13.7	2.15 V	301	43.1	17.2
9	15750.00	43.6 AV	54.0	-10.4	2.15 V	301	26.4	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.7 PK	74.0	-14.3	1.88 H	264	53.7	6.0
2	5460.00	41.7 AV	54.0	-12.3	1.88 H	264	35.7	6.0
3	#5470.00	52.7 PK	68.2	-15.5	1.88 H	264	46.7	6.0
4	*5570.00	90.5 PK			1.88 H	264	84.6	5.9
5	*5570.00	78.6 AV			1.88 H	264	72.7	5.9
6	#5725.00	56.3 PK	68.2	-11.9	1.88 H	264	50.1	6.2
7	11140.00	50.4 PK	74.0	-23.6	2.00 H	216	33.7	16.7
8	11140.00	37.4 AV	54.0	-16.6	2.00 H	216	20.7	16.7
9	#16710.00	54.3 PK	68.2	-13.9	1.96 H	259	32.8	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	71.0 PK	74.0	-3.0	1.38 V	94	65.0	6.0
2	5460.00	48.6 AV	54.0	-5.4	1.38 V	94	42.6	6.0
3	#5470.00	62.7 PK	68.2	-5.5	1.38 V	94	56.7	6.0
4	*5570.00	100.7 PK			1.38 V	94	94.8	5.9
5	*5570.00	89.5 AV			1.38 V	94	83.6	5.9
6	#5725.00	66.4 PK	68.2	-1.8	1.38 V	94	60.2	6.2
7	11140.00	50.2 PK	74.0	-23.8	1.64 V	143	33.5	16.7
8	11140.00	37.3 AV	54.0	-16.7	1.64 V	143	20.6	16.7
9	#16710.00	54.2 PK	68.2	-14.0	2.10 V	302	32.7	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.28 H	225	53.6	6.0
2	5150.00	45.6 AV	54.0	-8.4	1.28 H	225	39.6	6.0
3	*5250.00	90.1 PK			1.28 H	225	84.6	5.5
4	*5250.00	79.5 AV			1.28 H	225	74.0	5.5
5	5350.00	59.6 PK	74.0	-14.4	1.28 H	225	53.7	5.9
6	5350.00	44.9 AV	54.0	-9.1	1.28 H	225	39.0	5.9
7	#10500.00	50.7 PK	68.2	-17.5	2.05 H	200	34.8	15.9
8	15750.00	59.2 PK	74.0	-14.8	1.87 H	271	42.0	17.2
9	15750.00	43.2 AV	54.0	-10.8	1.87 H	271	26.0	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.1 PK	74.0	-4.9	1.38 V	306	63.1	6.0
2	5150.00	51.9 AV	54.0	-2.1	1.38 V	306	45.9	6.0
3	*5250.00	99.7 PK			1.38 V	306	94.2	5.5
4	*5250.00	88.3 AV			1.38 V	306	82.8	5.5
5	5350.00	69.3 PK	74.0	-4.7	1.38 V	306	63.4	5.9
6	5350.00	52.1 AV	54.0	-1.9	1.38 V	306	46.2	5.9
7	#10500.00	50.5 PK	68.2	-17.7	1.53 V	150	34.6	15.9
8	15750.00	59.5 PK	74.0	-14.5	2.05 V	311	42.3	17.2
9	15750.00	42.8 AV	54.0	-11.2	2.05 V	311	25.6	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.7 PK	74.0	-16.3	1.88 H	264	51.7	6.0
2	5460.00	41.4 AV	54.0	-12.6	1.88 H	264	35.4	6.0
3	#5470.00	53.3 PK	68.2	-14.9	1.88 H	264	47.3	6.0
4	*5570.00	88.9 PK			1.88 H	264	83.0	5.9
5	*5570.00	77.8 AV			1.88 H	264	71.9	5.9
6	#5725.00	57.1 PK	68.2	-11.1	1.88 H	264	50.9	6.2
7	11140.00	49.3 PK	74.0	-24.7	2.03 H	214	32.6	16.7
8	11140.00	36.2 AV	54.0	-17.8	2.03 H	214	19.5	16.7
9	#16710.00	55.3 PK	68.2	-12.9	1.85 H	275	33.8	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	69.5 PK	74.0	-4.5	1.35 V	94	63.5	6.0
2	5460.00	47.9 AV	54.0	-6.1	1.35 V	94	41.9	6.0
3	#5470.00	62.3 PK	68.2	-5.9	1.35 V	94	56.3	6.0
4	*5570.00	100.7 PK			1.35 V	94	94.8	5.9
5	*5570.00	88.7 AV			1.35 V	94	82.8	5.9
6	#5725.00	66.5 PK	68.2	-1.7	1.35 V	94	60.3	6.2
7	11140.00	49.2 PK	74.0	-24.8	1.60 V	153	32.5	16.7
8	11140.00	37.2 AV	54.0	-16.8	1.60 V	153	20.5	16.7
9	#16710.00	54.9 PK	68.2	-13.3	2.05 V	320	33.4	21.5


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.


MODE C_SISO Plot of Band Edge

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 52+26-tone MRU Channel 36

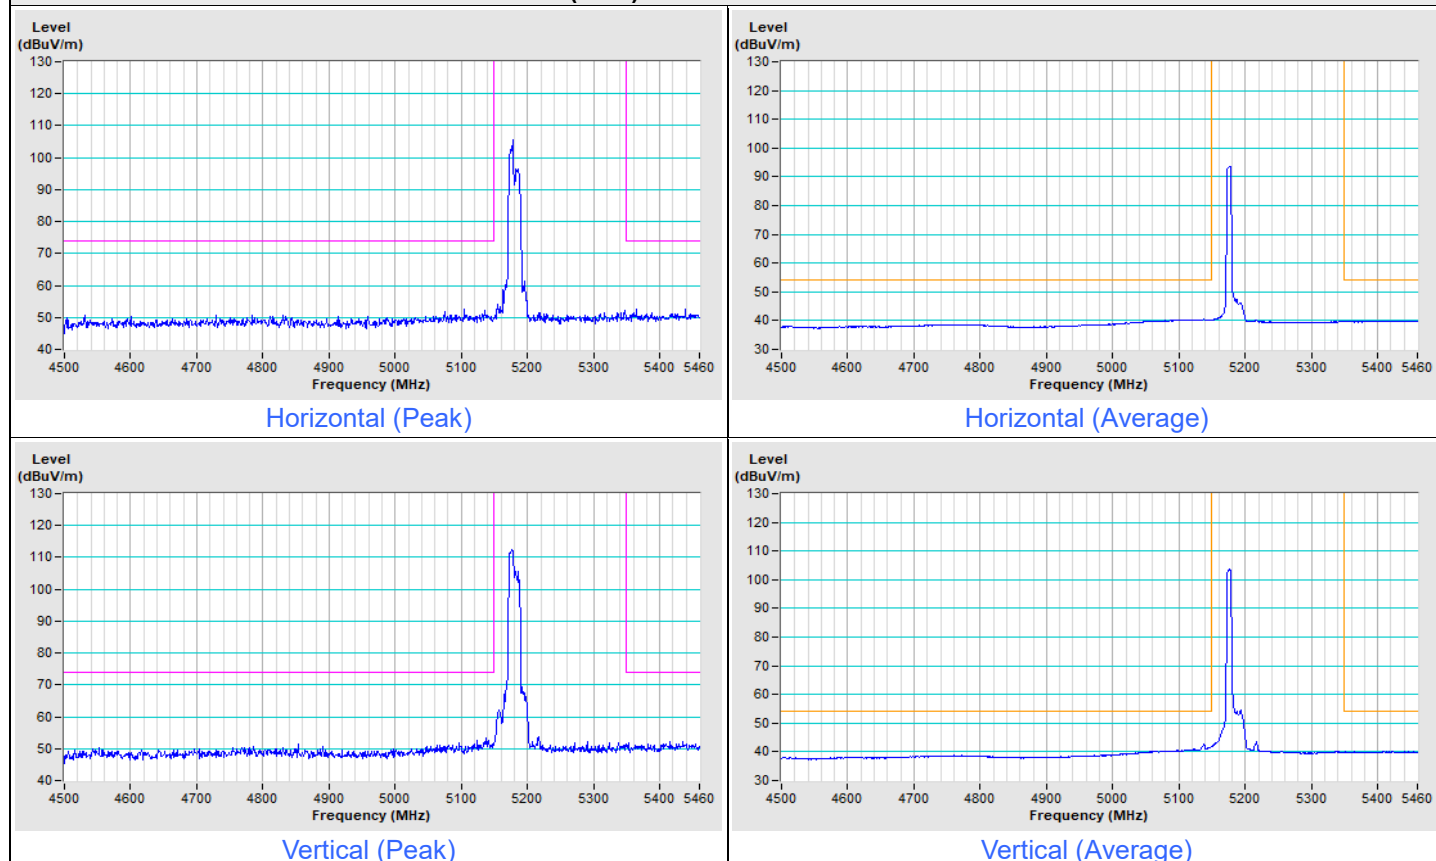


802.11be (EHT) 52+26-tone MRU Channel 64

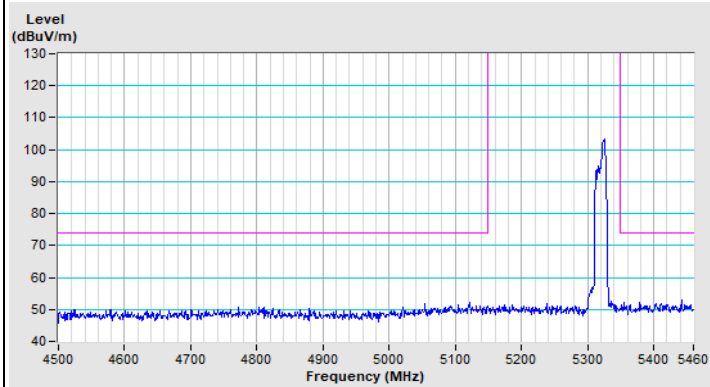


Horizontal (Peak)

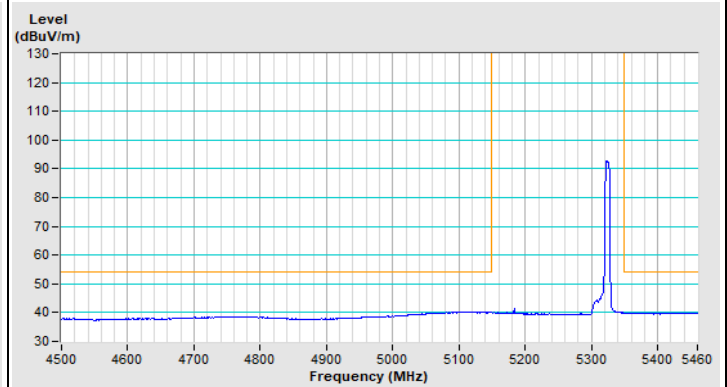

Horizontal (Average)

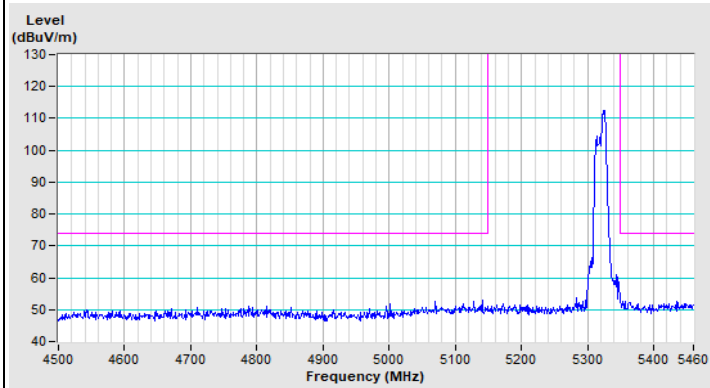


Vertical (Peak)

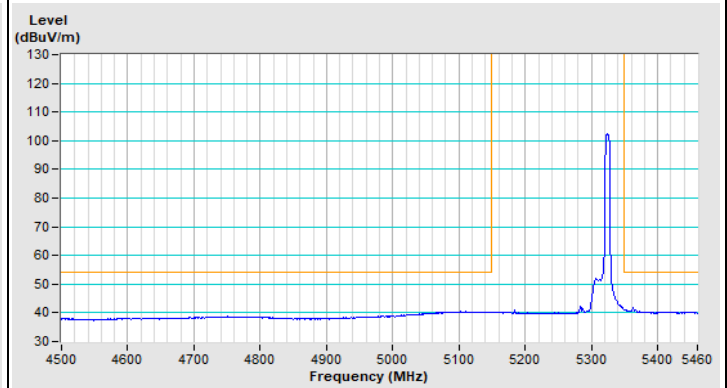

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 52+26-tone MRU Channel 100

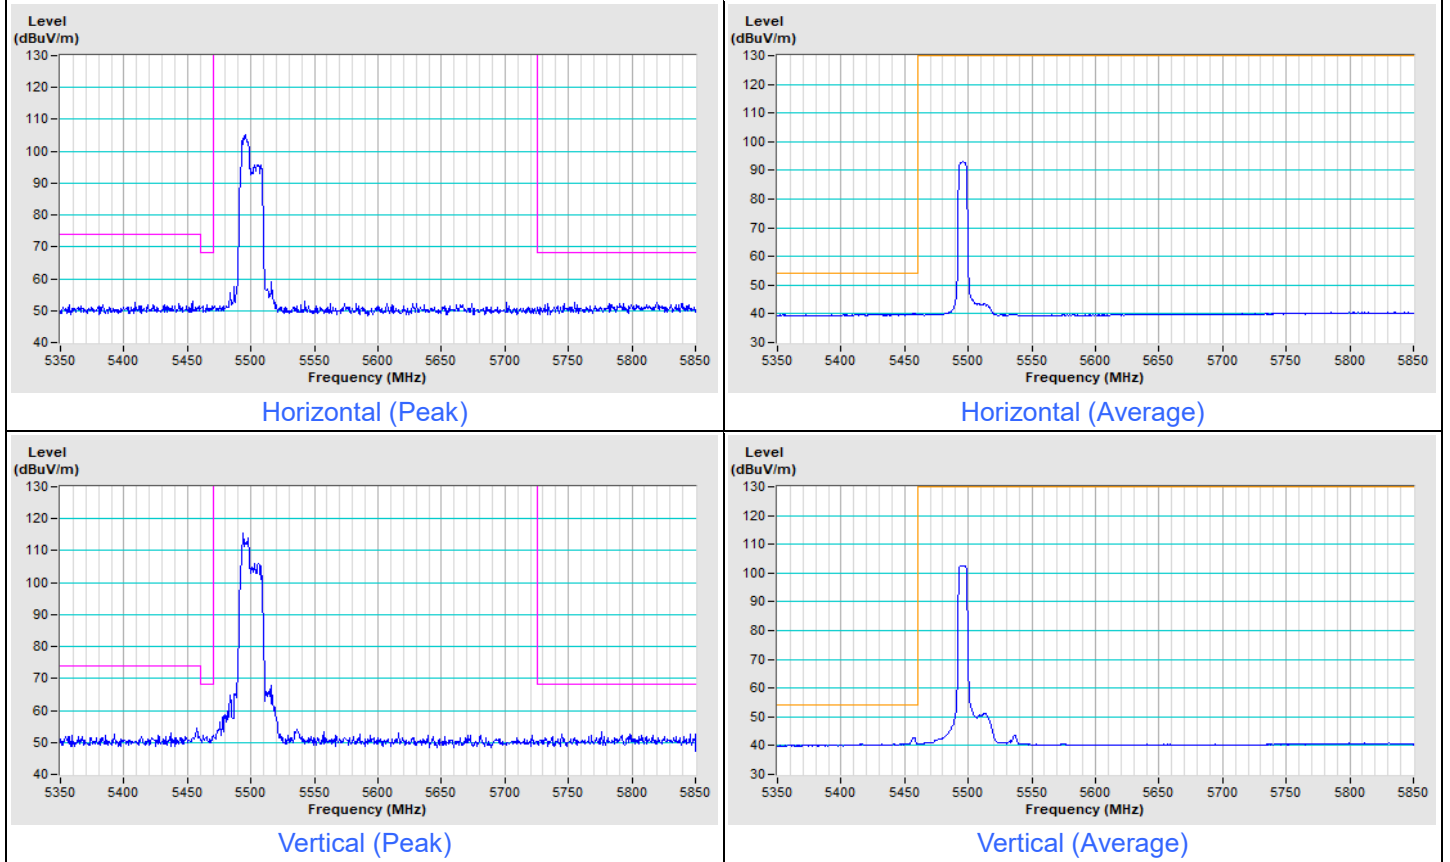


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 52+26-tone MRU Channel 149

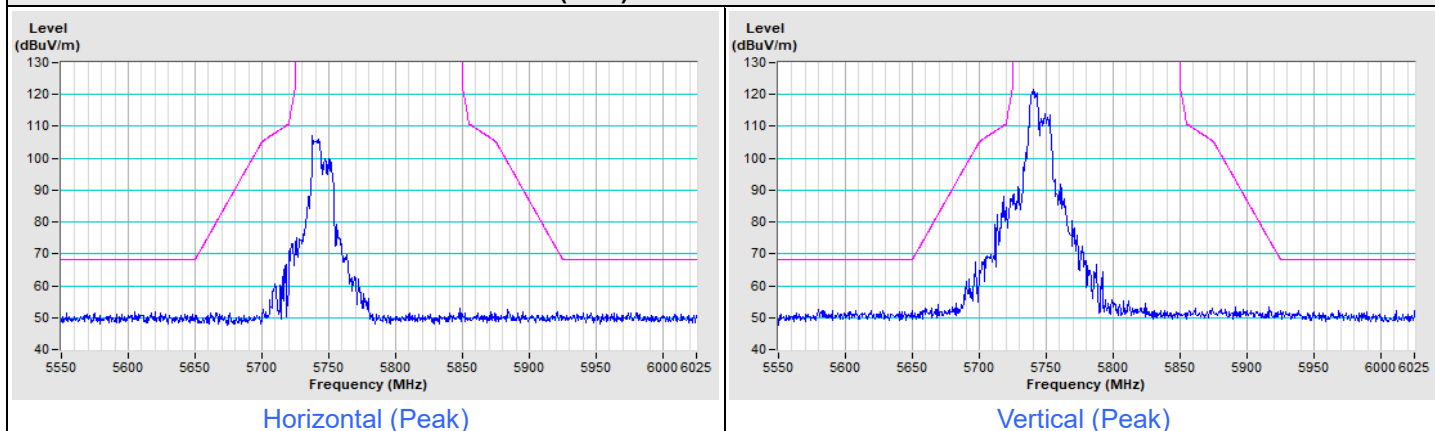


802.11be (EHT) 52+26-tone MRU Channel 165

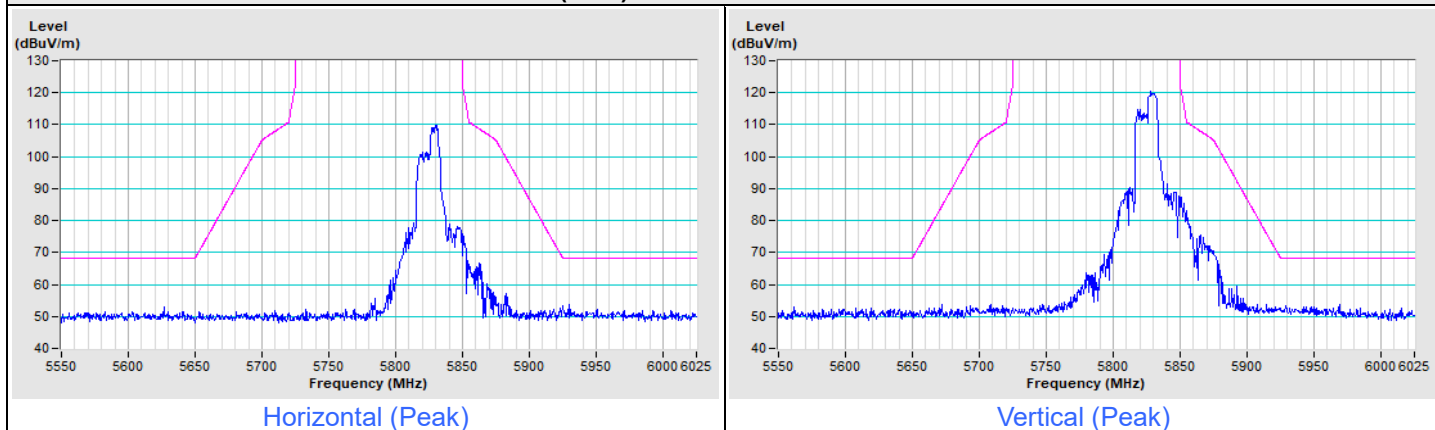


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 106+26-tone MRU Channel 36

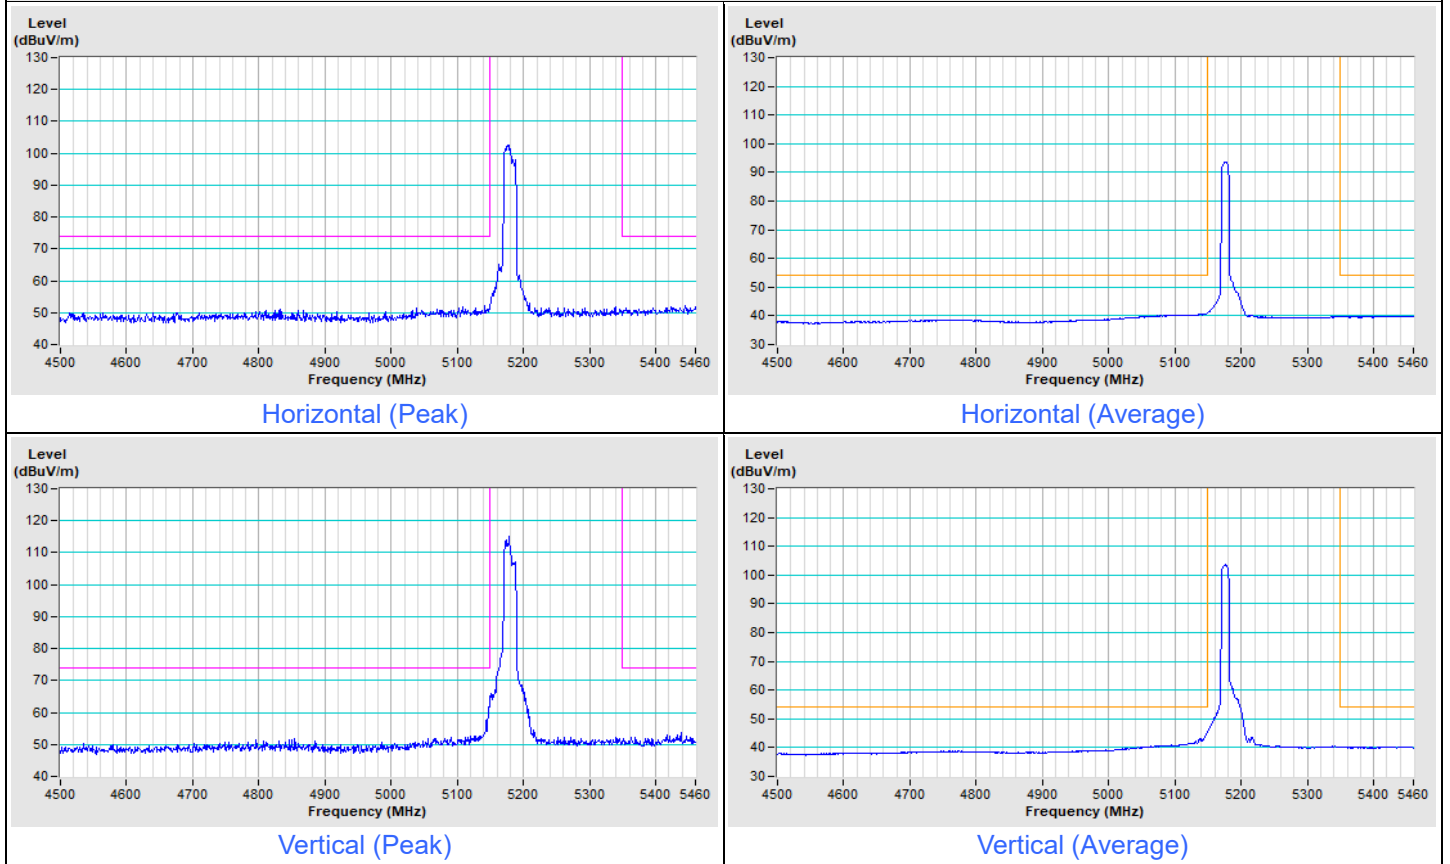


802.11be (EHT) 106+26-tone MRU Channel 64

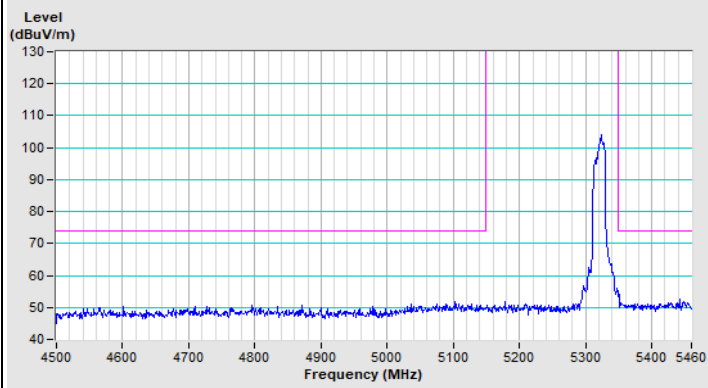


Horizontal (Peak)

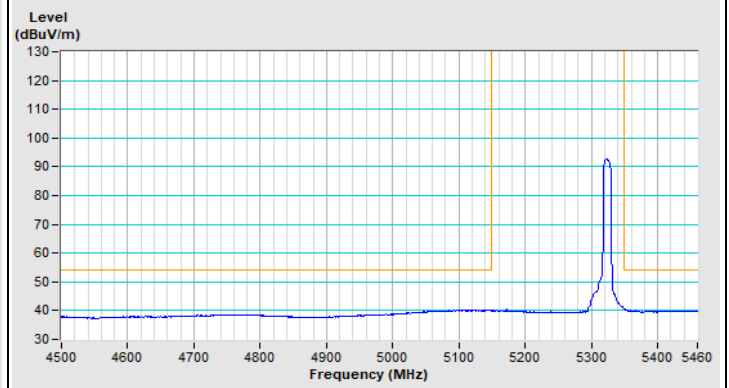

Horizontal (Average)

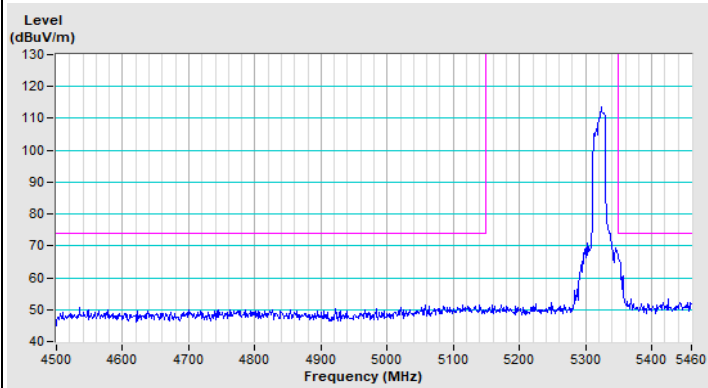


Vertical (Peak)

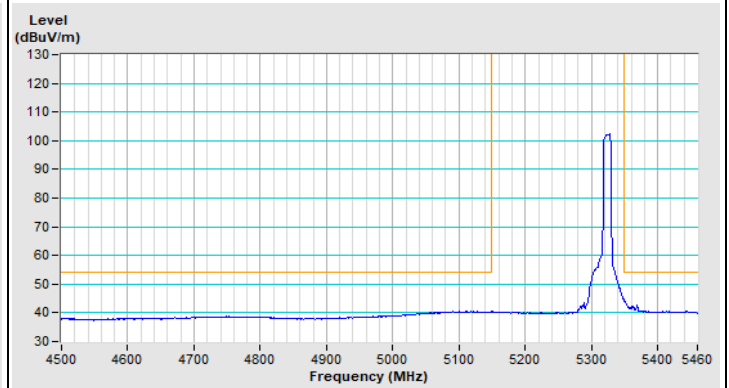

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 106+26-tone MRU Channel 100

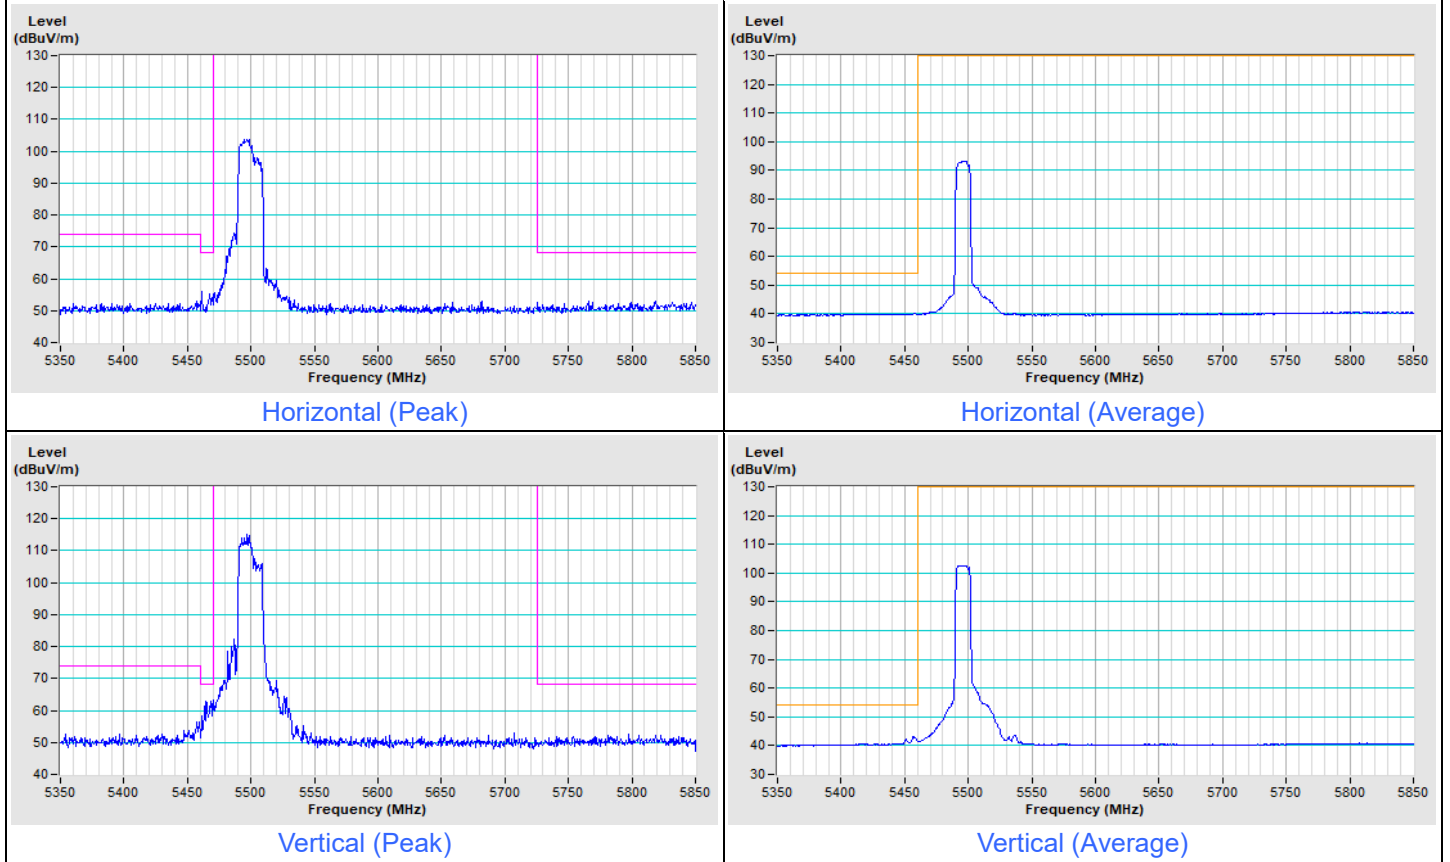


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 106+26-tone MRU Channel 149

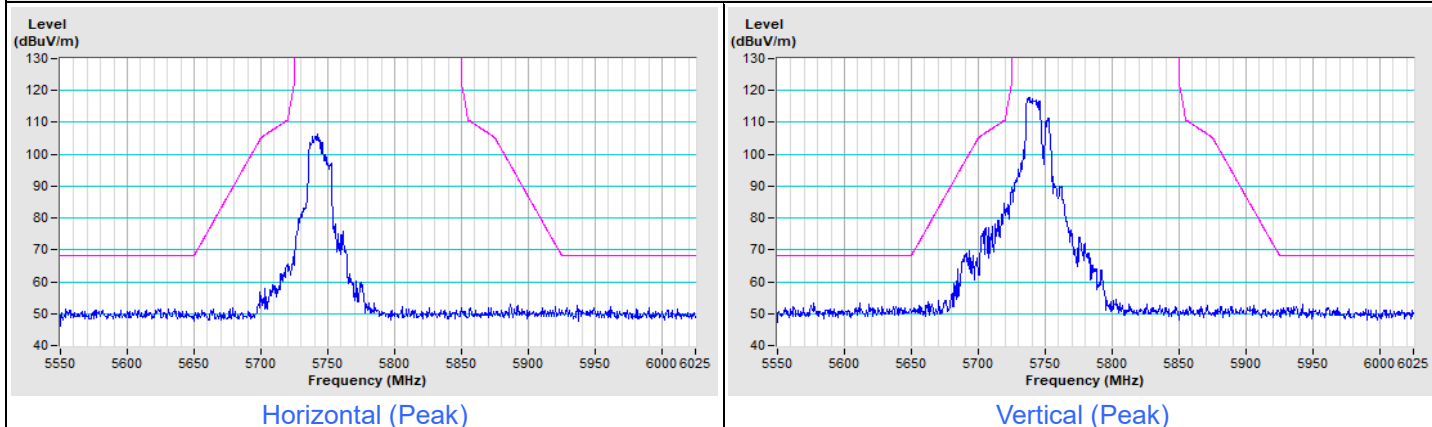


802.11be (EHT) 106+26-tone MRU Channel 165

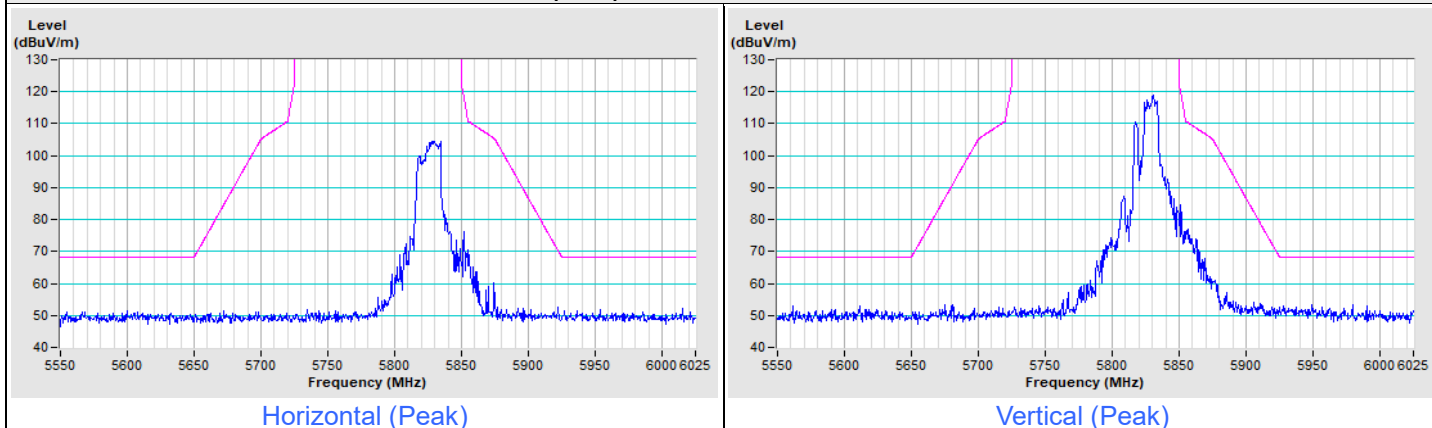


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 484+242-tone MRU Channel 42

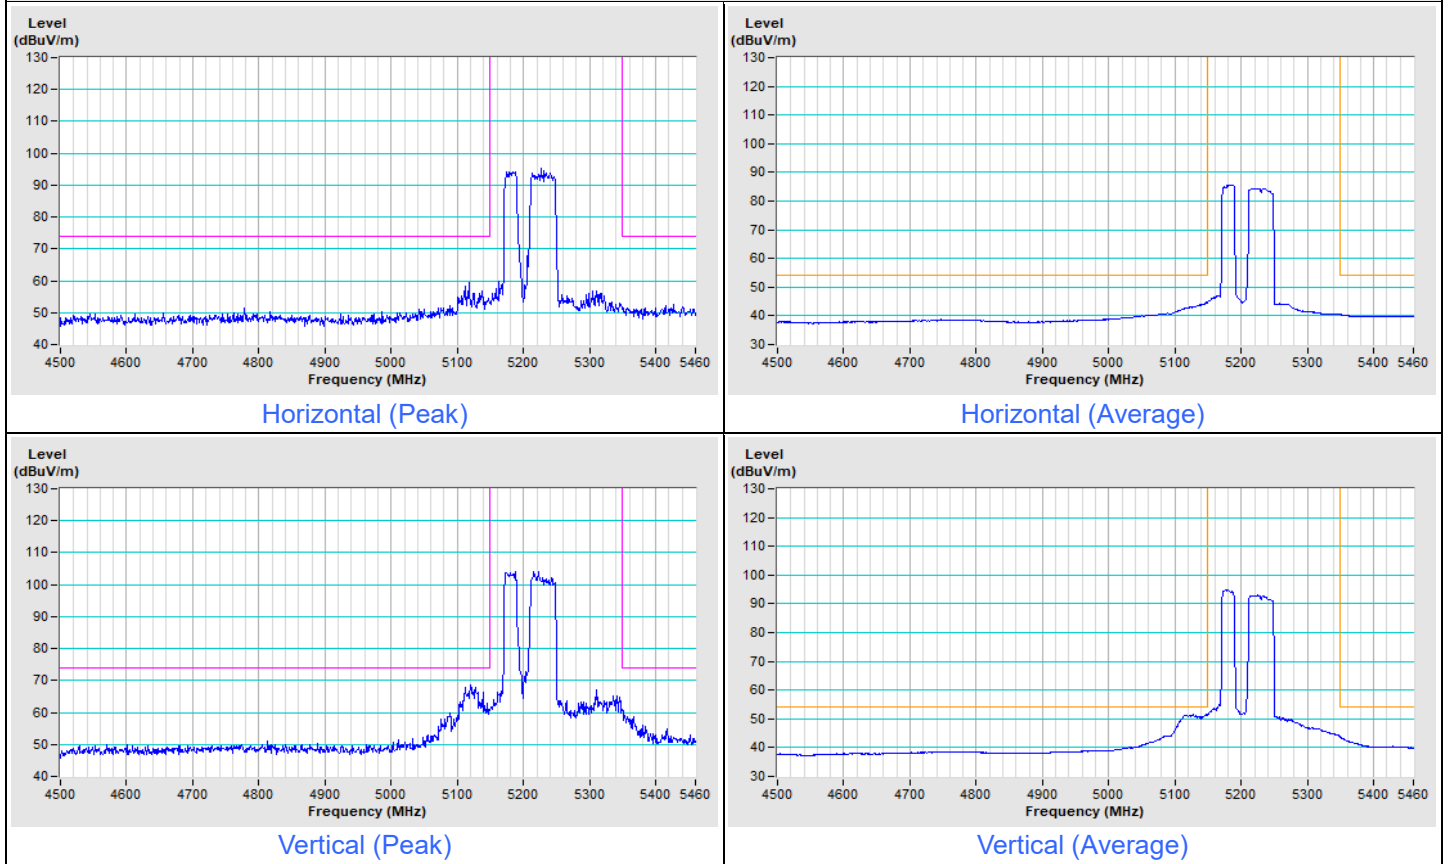


802.11be (EHT) 484+242-tone MRU Channel 58

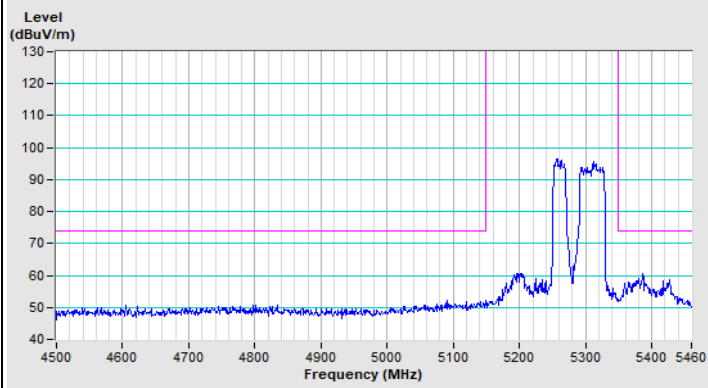


Horizontal (Peak)

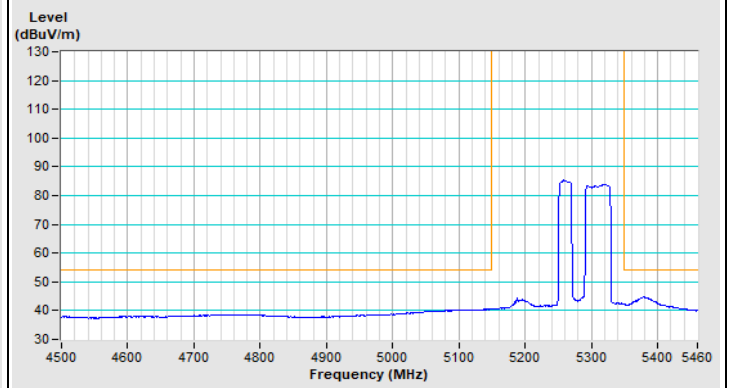

Horizontal (Average)

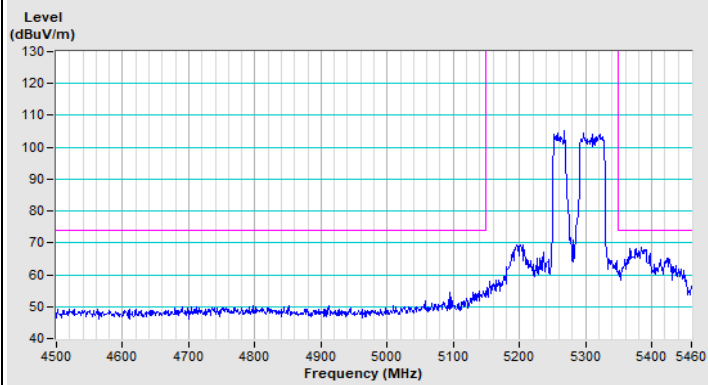


Vertical (Peak)

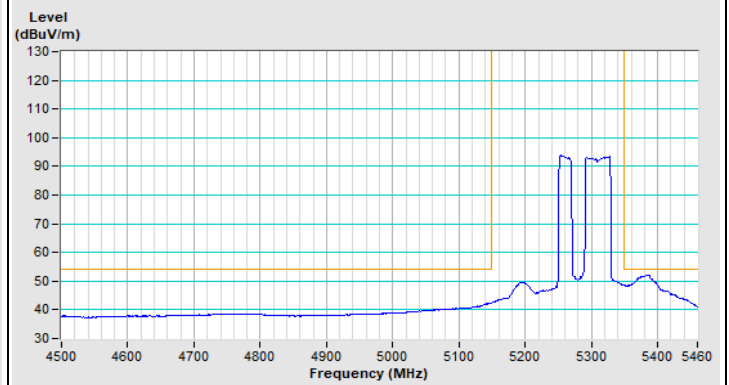

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 484+242-tone MRU Channel 106

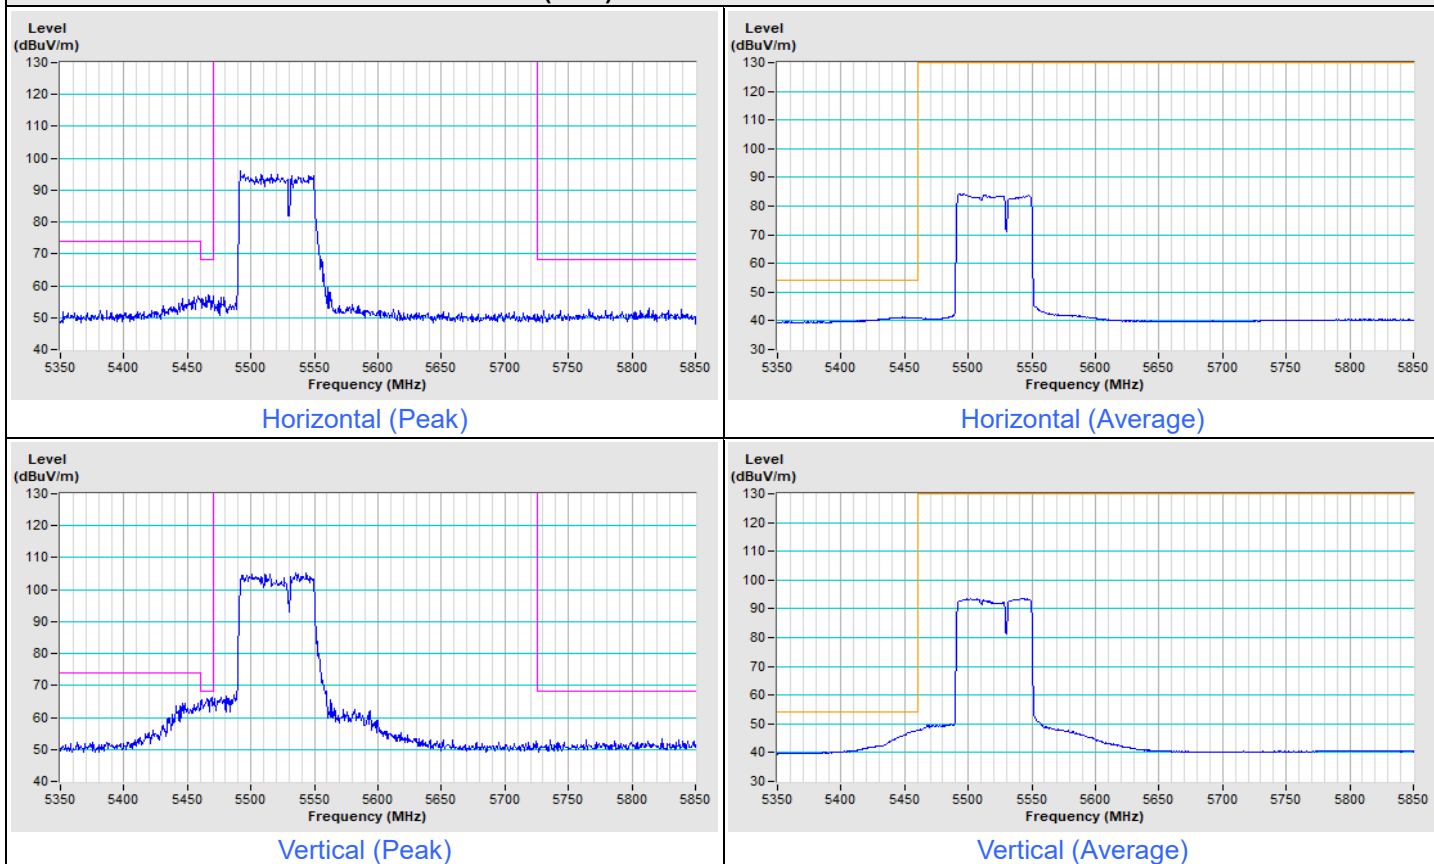


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 484+242-tone MRU Channel 155

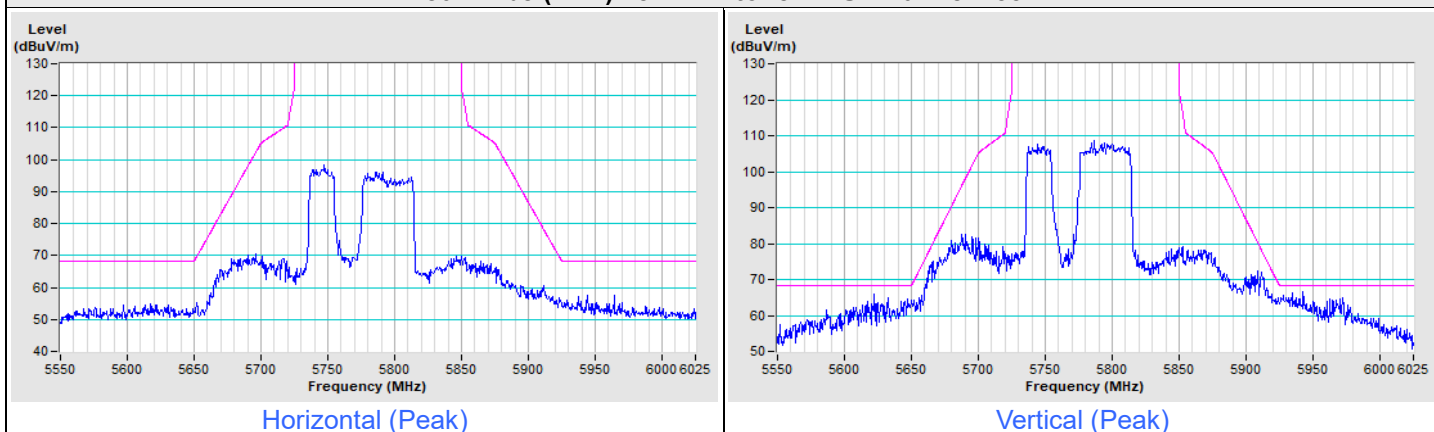


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT) 996+484-tone MRU Channel 50

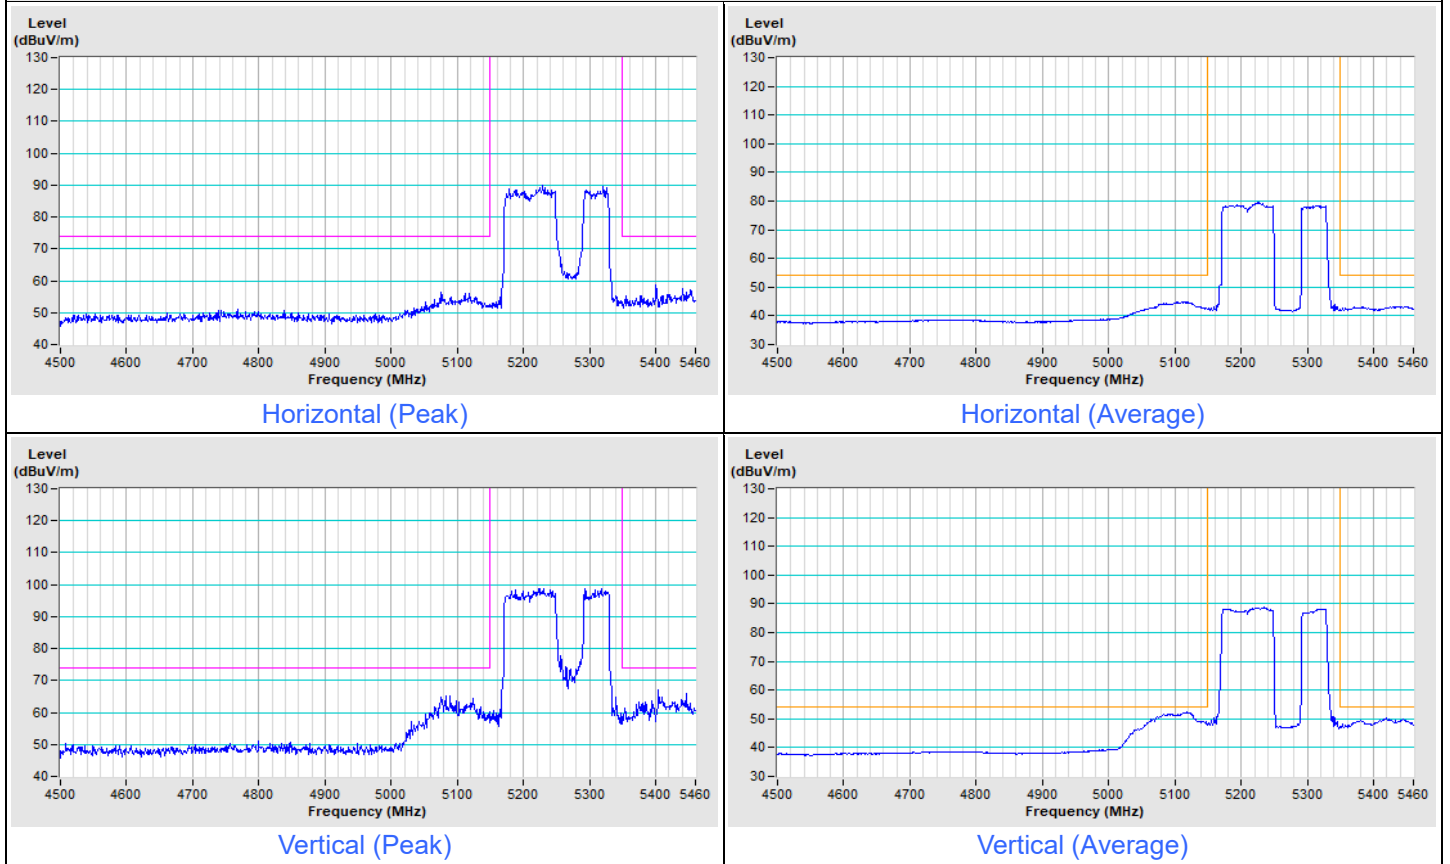


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 996+484-tone MRU Channel 114

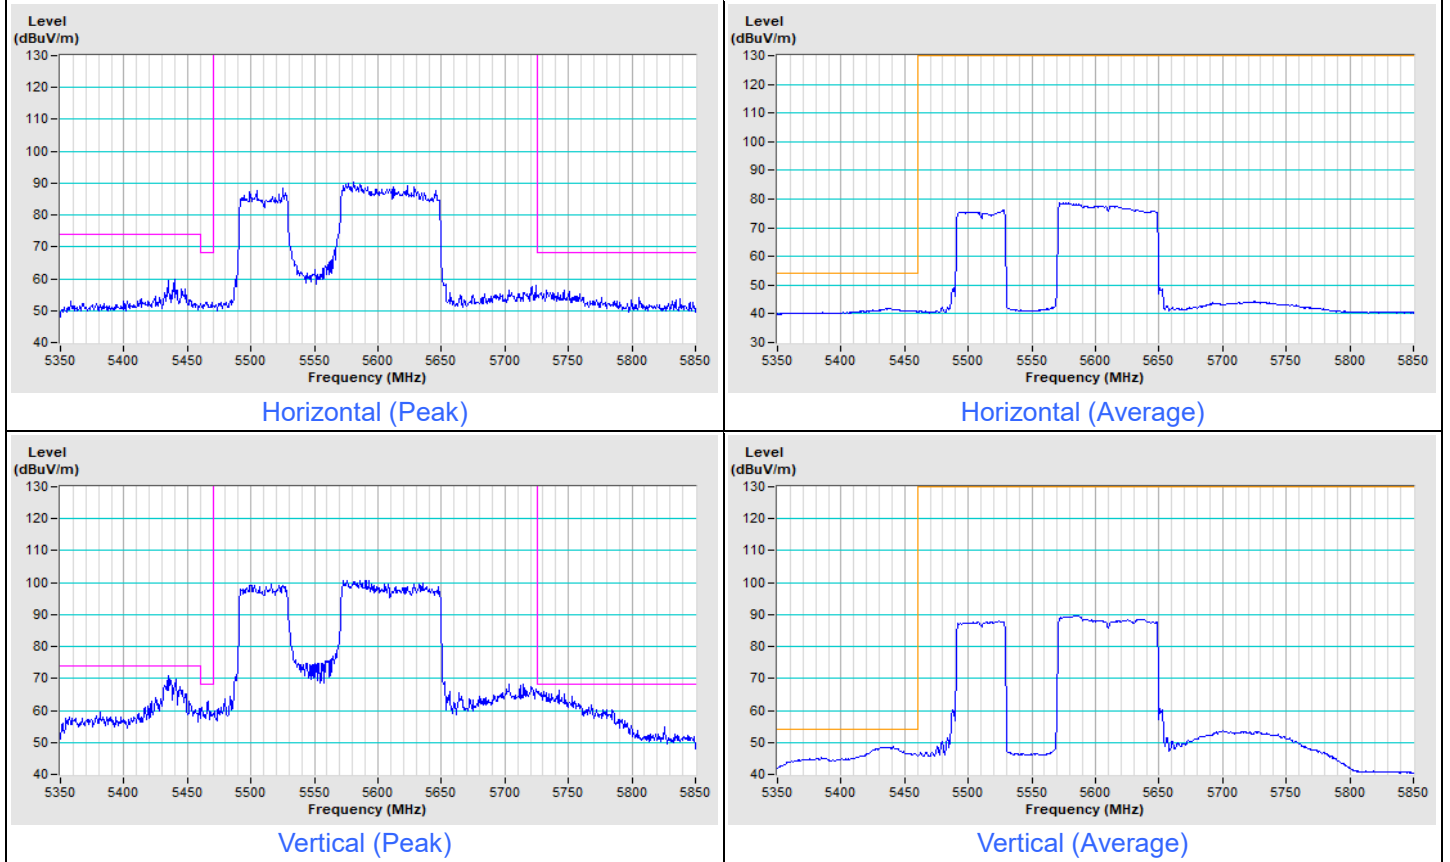


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT) 996+484+242-tone MRU Channel 50

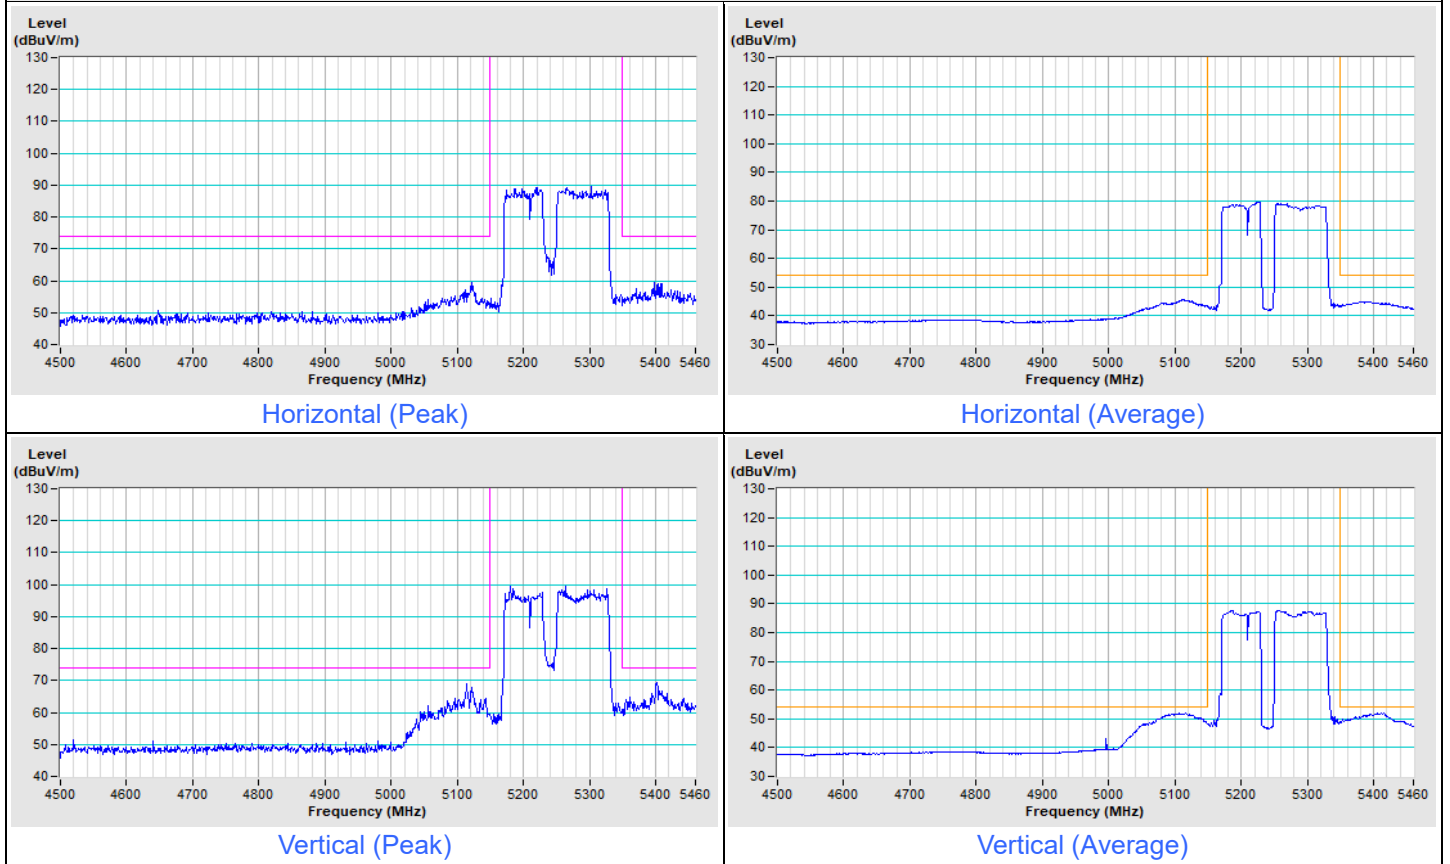

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 996+484+242-tone MRU Channel 114

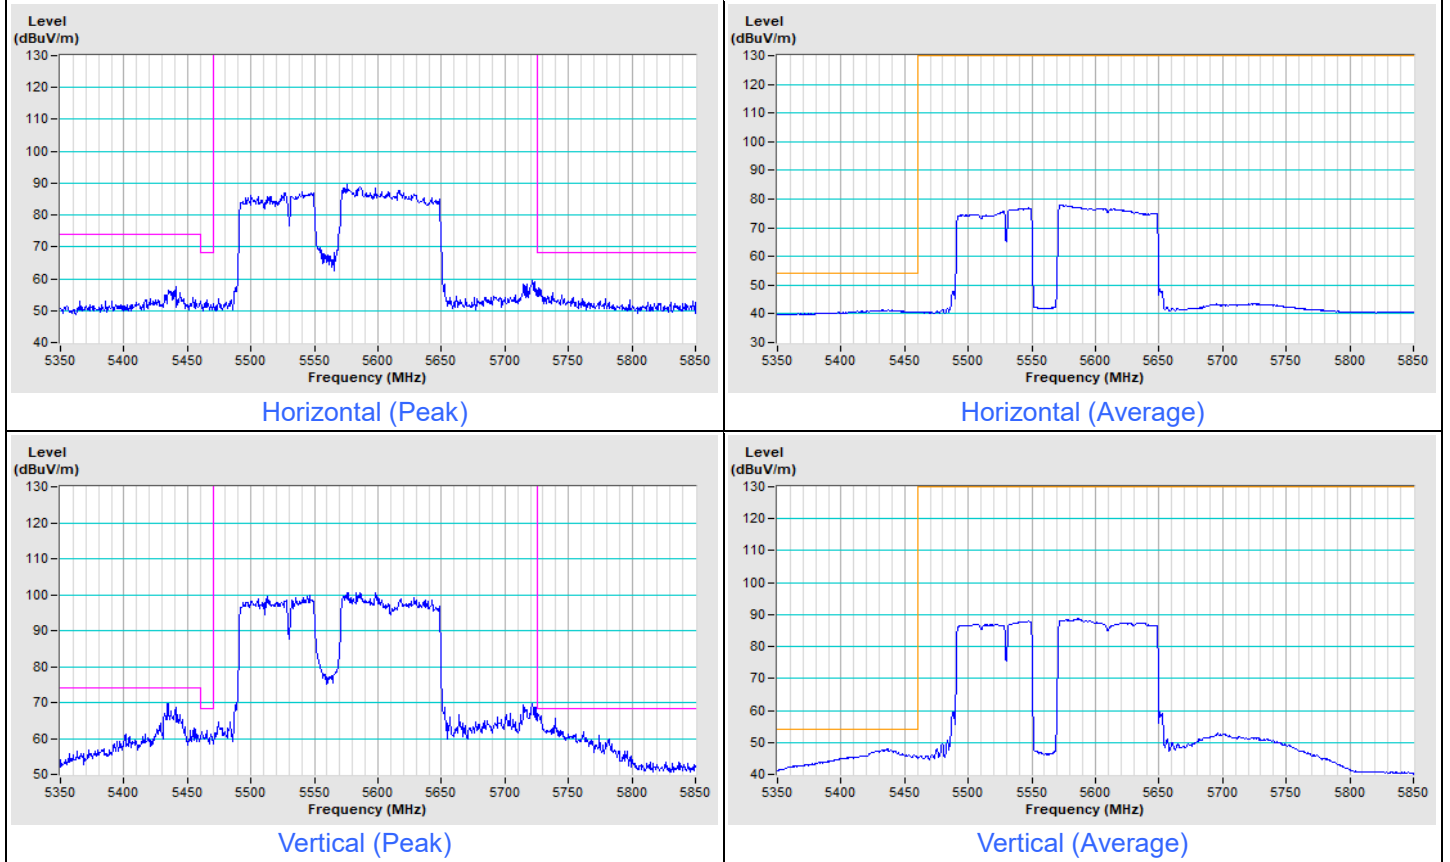

MODE A_CDD

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.9 PK	74.0	-21.1	2.02 H	178	46.9	6.0
2	5150.00	43.3 AV	54.0	-10.7	2.02 H	178	37.3	6.0
3	*5180.00	116.2 PK			2.02 H	178	110.3	5.9
4	*5180.00	104.8 AV			2.02 H	178	98.9	5.9
5	#10360.00	50.4 PK	68.2	-17.8	1.63 H	232	34.5	15.9
6	15540.00	56.7 PK	74.0	-17.3	1.99 H	241	39.8	16.9
7	15540.00	43.2 AV	54.0	-10.8	1.99 H	241	26.3	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.9 PK	74.0	-22.1	1.99 V	232	45.9	6.0
2	5150.00	41.7 AV	54.0	-12.3	1.99 V	232	35.7	6.0
3	*5180.00	112.1 PK			1.99 V	232	106.2	5.9
4	*5180.00	101.3 AV			1.99 V	232	95.4	5.9
5	#10360.00	51.0 PK	68.2	-17.2	1.80 V	157	35.1	15.9
6	15540.00	57.5 PK	74.0	-16.5	1.05 V	226	40.6	16.9
7	15540.00	42.7 AV	54.0	-11.3	1.05 V	226	25.8	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	116.2 PK			2.02 H	172	110.6	5.6
2	*5240.00	105.1 AV			2.02 H	172	99.5	5.6
3	5350.00	53.4 PK	74.0	-20.6	2.02 H	172	47.5	5.9
4	5350.00	41.6 AV	54.0	-12.4	2.02 H	172	35.7	5.9
5	#10480.00	50.4 PK	68.2	-17.8	1.65 H	242	34.4	16.0
6	15720.00	57.0 PK	74.0	-17.0	1.98 H	231	39.8	17.2
7	15720.00	43.3 AV	54.0	-10.7	1.98 H	231	26.1	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	112.2 PK			1.96 V	239	106.6	5.6
2	*5240.00	101.6 AV			1.96 V	239	96.0	5.6
3	5350.00	52.9 PK	74.0	-21.1	1.96 V	239	47.0	5.9
4	5350.00	41.0 AV	54.0	-13.0	1.96 V	239	35.1	5.9
5	#10480.00	50.8 PK	68.2	-17.4	1.74 V	157	34.8	16.0
6	15720.00	56.8 PK	74.0	-17.2	1.00 V	225	39.6	17.2
7	15720.00	42.3 AV	54.0	-11.7	1.00 V	225	25.1	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.3 PK	74.0	-20.7	2.05 H	187	47.3	6.0
2	5150.00	41.3 AV	54.0	-12.7	2.05 H	187	35.3	6.0
3	*5260.00	116.4 PK			2.05 H	187	110.9	5.5
4	*5260.00	106.3 AV			2.05 H	187	100.8	5.5
5	#10520.00	50.8 PK	68.2	-17.4	1.64 H	245	34.9	15.9
6	15780.00	57.3 PK	74.0	-16.7	1.94 H	229	40.2	17.1
7	15780.00	43.7 AV	54.0	-10.3	1.94 H	229	26.6	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.0 PK	74.0	-21.0	1.85 V	254	47.0	6.0
2	5150.00	40.9 AV	54.0	-13.1	1.85 V	254	34.9	6.0
3	*5260.00	112.3 PK			1.85 V	254	106.8	5.5
4	*5260.00	101.9 AV			1.85 V	254	96.4	5.5
5	#10520.00	51.3 PK	68.2	-16.9	1.71 V	167	35.4	15.9
6	15780.00	56.5 PK	74.0	-17.5	1.00 V	232	39.4	17.1
7	15780.00	42.2 AV	54.0	-11.8	1.00 V	232	25.1	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.0 PK			1.99 H	174	110.4	5.6
2	*5320.00	106.0 AV			1.99 H	174	100.4	5.6
3	5350.00	53.4 PK	74.0	-20.6	1.99 H	174	47.5	5.9
4	5350.00	42.0 AV	54.0	-12.0	1.99 H	174	36.1	5.9
5	10640.00	50.1 PK	74.0	-23.9	1.62 H	232	33.7	16.4
6	10640.00	38.5 AV	54.0	-15.5	1.62 H	232	22.1	16.4
7	15960.00	52.3 PK	74.0	-21.7	1.99 H	247	35.1	17.2
8	15960.00	40.2 AV	54.0	-13.8	1.99 H	247	23.0	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.8 PK			1.90 V	260	107.2	5.6
2	*5320.00	102.2 AV			1.90 V	260	96.6	5.6
3	5350.00	52.4 PK	74.0	-21.6	1.90 V	260	46.5	5.9
4	5350.00	40.5 AV	54.0	-13.5	1.90 V	260	34.6	5.9
5	10640.00	49.5 PK	74.0	-24.5	1.68 V	170	33.1	16.4
6	10640.00	38.0 AV	54.0	-16.0	1.68 V	170	21.6	16.4
7	15960.00	51.6 PK	74.0	-22.4	1.03 V	236	34.4	17.2
8	15960.00	39.3 AV	54.0	-14.7	1.03 V	236	22.1	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.6 PK	74.0	-18.4	1.95 H	176	49.6	6.0
2	5460.00	43.7 AV	54.0	-10.3	1.95 H	176	37.7	6.0
3	#5470.00	52.7 PK	68.2	-15.5	1.95 H	176	46.7	6.0
4	*5500.00	115.8 PK			1.95 H	176	109.8	6.0
5	*5500.00	105.5 AV			1.95 H	176	99.5	6.0
6	11000.00	50.9 PK	74.0	-23.1	1.61 H	248	34.0	16.9
7	11000.00	38.9 AV	54.0	-15.1	1.61 H	248	22.0	16.9
8	#16500.00	54.5 PK	68.2	-13.7	1.97 H	256	34.9	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.3 PK	74.0	-20.7	1.63 V	230	47.3	6.0
2	5460.00	41.2 AV	54.0	-12.8	1.63 V	230	35.2	6.0
3	#5470.00	52.0 PK	68.2	-16.2	1.63 V	230	46.0	6.0
4	*5500.00	113.0 PK			1.63 V	230	107.0	6.0
5	*5500.00	101.7 AV			1.63 V	230	95.7	6.0
6	11000.00	49.8 PK	74.0	-24.2	1.65 V	169	32.9	16.9
7	11000.00	38.2 AV	54.0	-15.8	1.65 V	169	21.3	16.9
8	#16500.00	54.1 PK	68.2	-14.1	1.03 V	233	34.5	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	114.5 PK			1.33 H	180	108.4	6.1
2	*5700.00	101.9 AV			1.33 H	180	95.8	6.1
3	#5725.00	52.8 PK	68.2	-15.4	1.33 H	180	46.6	6.2
4	11400.00	51.5 PK	74.0	-22.5	1.61 H	247	34.6	16.9
5	11400.00	39.4 AV	54.0	-14.6	1.61 H	247	22.5	16.9
6	#17100.00	54.5 PK	68.2	-13.7	1.95 H	253	34.3	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.5 PK			1.41 V	228	102.4	6.1
2	*5700.00	98.8 AV			1.41 V	228	92.7	6.1
3	#5725.00	53.3 PK	68.2	-14.9	1.41 V	228	47.1	6.2
4	11400.00	49.6 PK	74.0	-24.4	1.63 V	163	32.7	16.9
5	11400.00	38.2 AV	54.0	-15.8	1.63 V	163	21.3	16.9
6	#17100.00	53.6 PK	68.2	-14.6	1.04 V	218	33.4	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.5 PK	74.0	-21.5	1.22 H	176	46.5	6.0
2	5460.00	39.8 AV	54.0	-14.2	1.22 H	176	33.8	6.0
3	#5470.00	51.6 PK	68.2	-16.6	1.22 H	176	45.6	6.0
4	*5720.00	115.0 PK			1.22 H	176	108.8	6.2
5	*5720.00	105.2 AV			1.22 H	176	99.0	6.2
6	#5850.00	53.1 PK	68.2	-15.1	1.22 H	176	46.5	6.6
7	11440.00	49.6 PK	74.0	-24.4	1.57 H	315	32.7	16.9
8	11440.00	38.5 AV	54.0	-15.5	1.57 H	315	21.6	16.9
9	#17160.00	54.8 PK	68.2	-13.4	1.48 H	301	34.8	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.2 PK	74.0	-21.8	1.38 V	220	46.2	6.0
2	5460.00	39.4 AV	54.0	-14.6	1.38 V	220	33.4	6.0
3	#5470.00	51.3 PK	68.2	-16.9	1.38 V	220	45.3	6.0
4	*5720.00	112.6 PK			1.38 V	220	106.4	6.2
5	*5720.00	101.4 AV			1.38 V	220	95.2	6.2
6	#5850.00	52.8 PK	68.2	-15.4	1.38 V	220	46.2	6.6
7	11440.00	49.3 PK	74.0	-24.7	1.63 V	322	32.4	16.9
8	11440.00	37.9 AV	54.0	-16.1	1.63 V	322	21.0	16.9
9	#17160.00	54.4 PK	68.2	-13.8	1.50 V	315	34.4	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.34	54.7 PK	68.2	-13.5	1.65 H	354	48.6	6.1
2	*5745.00	124.0 PK			1.65 H	354	117.7	6.3
3	*5745.00	115.5 AV			1.65 H	354	109.2	6.3
4	#5931.79	53.6 PK	68.2	-14.6	1.65 H	354	46.8	6.8
5	11490.00	49.6 PK	74.0	-24.4	1.56 H	319	32.6	17.0
6	11490.00	38.5 AV	54.0	-15.5	1.56 H	319	21.5	17.0
7	#17235.00	55.1 PK	68.2	-13.1	1.55 H	297	34.6	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.52	52.5 PK	68.2	-15.7	1.58 V	135	46.4	6.1
2	*5745.00	123.4 PK			1.58 V	135	117.1	6.3
3	*5745.00	112.2 AV			1.58 V	135	105.9	6.3
4	#5926.20	52.3 PK	68.2	-15.9	1.58 V	135	45.5	6.8
5	11490.00	49.8 PK	74.0	-24.2	1.59 V	343	32.8	17.0
6	11490.00	38.9 AV	54.0	-15.1	1.59 V	343	21.9	17.0
7	#17235.00	54.1 PK	68.2	-14.1	1.46 V	308	33.6	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5616.00	53.6 PK	68.2	-14.6	2.06 H	1	47.5	6.1
2	*5825.00	123.3 PK			2.06 H	1	116.6	6.7
3	*5825.00	115.2 AV			2.06 H	1	108.5	6.7
4	#5946.81	53.8 PK	68.2	-14.4	2.06 H	1	47.1	6.7
5	11650.00	49.8 PK	74.0	-24.2	1.64 H	333	33.0	16.8
6	11650.00	38.4 AV	54.0	-15.6	1.64 H	333	21.6	16.8
7	#17475.00	54.2 PK	68.2	-14.0	1.56 H	299	31.4	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.30	52.5 PK	68.2	-15.7	1.90 V	94	46.4	6.1
2	*5825.00	121.1 PK			1.90 V	94	114.4	6.7
3	*5825.00	111.9 AV			1.90 V	94	105.2	6.7
4	#5955.10	52.8 PK	68.2	-15.4	1.90 V	94	46.1	6.7
5	11650.00	49.0 PK	74.0	-25.0	1.49 V	350	32.2	16.8
6	11650.00	38.2 AV	54.0	-15.8	1.49 V	350	21.4	16.8
7	#17475.00	53.1 PK	68.2	-15.1	1.56 V	331	30.3	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	2.06 H	191	51.3	6.0
2	5150.00	43.1 AV	54.0	-10.9	2.06 H	191	37.1	6.0
3	*5180.00	114.0 PK			2.06 H	191	108.1	5.9
4	*5180.00	104.9 AV			2.06 H	191	99.0	5.9
5	#10360.00	51.3 PK	68.2	-16.9	1.65 H	218	35.4	15.9
6	15540.00	62.2 PK	74.0	-11.8	1.96 H	228	45.3	16.9
7	15540.00	47.1 AV	54.0	-6.9	1.96 H	228	30.2	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.1 PK	74.0	-19.9	1.82 V	228	48.1	6.0
2	5150.00	41.6 AV	54.0	-12.4	1.82 V	228	35.6	6.0
3	*5180.00	113.0 PK			1.82 V	228	107.1	5.9
4	*5180.00	101.4 AV			1.82 V	228	95.5	5.9
5	#10360.00	50.6 PK	68.2	-17.6	1.71 V	166	34.7	15.9
6	15540.00	59.3 PK	74.0	-14.7	1.09 V	235	42.4	16.9
7	15540.00	44.6 AV	54.0	-9.4	1.09 V	235	27.7	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	114.1 PK			2.08 H	191	108.5	5.6
2	*5240.00	105.0 AV			2.08 H	191	99.4	5.6
3	5350.00	56.3 PK	74.0	-17.7	2.08 H	191	50.4	5.9
4	5350.00	42.4 AV	54.0	-11.6	2.08 H	191	36.5	5.9
5	#10480.00	50.8 PK	68.2	-17.4	1.65 H	233	34.8	16.0
6	15720.00	61.7 PK	74.0	-12.3	1.97 H	238	44.5	17.2
7	15720.00	46.7 AV	54.0	-7.3	1.97 H	238	29.5	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	112.9 PK			1.82 V	237	107.3	5.6
2	*5240.00	101.4 AV			1.82 V	237	95.8	5.6
3	5350.00	52.5 PK	74.0	-21.5	1.82 V	237	46.6	5.9
4	5350.00	40.2 AV	54.0	-13.8	1.82 V	237	34.3	5.9
5	#10480.00	50.2 PK	68.2	-18.0	1.76 V	160	34.2	16.0
6	15720.00	59.4 PK	74.0	-14.6	1.05 V	229	42.2	17.2
7	15720.00	44.8 AV	54.0	-9.2	1.05 V	229	27.6	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.6 PK	74.0	-19.4	1.96 H	180	48.6	6.0
2	5150.00	41.9 AV	54.0	-12.1	1.96 H	180	35.9	6.0
3	*5260.00	116.8 PK			1.96 H	180	111.3	5.5
4	*5260.00	105.9 AV			1.96 H	180	100.4	5.5
5	#10520.00	50.9 PK	68.2	-17.3	1.62 H	221	35.0	15.9
6	15780.00	61.5 PK	74.0	-12.5	1.98 H	251	44.4	17.1
7	15780.00	46.5 AV	54.0	-7.5	1.98 H	251	29.4	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.8 PK	74.0	-20.2	1.76 V	275	47.8	6.0
2	5150.00	40.8 AV	54.0	-13.2	1.76 V	275	34.8	6.0
3	*5260.00	113.2 PK			1.76 V	275	107.7	5.5
4	*5260.00	102.3 AV			1.76 V	275	96.8	5.5
5	#10520.00	50.7 PK	68.2	-17.5	1.73 V	161	34.8	15.9
6	15780.00	59.1 PK	74.0	-14.9	1.05 V	238	42.0	17.1
7	15780.00	44.7 AV	54.0	-9.3	1.05 V	238	27.6	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.7 PK			1.95 H	172	111.1	5.6
2	*5320.00	105.6 AV			1.95 H	172	100.0	5.6
3	5350.00	57.4 PK	74.0	-16.6	1.95 H	172	51.5	5.9
4	5350.00	43.8 AV	54.0	-10.2	1.95 H	172	37.9	5.9
5	10640.00	50.0 PK	74.0	-24.0	1.58 H	238	33.6	16.4
6	10640.00	38.4 AV	54.0	-15.6	1.58 H	238	22.0	16.4
7	15960.00	52.2 PK	74.0	-21.8	1.94 H	257	35.0	17.2
8	15960.00	40.1 AV	54.0	-13.9	1.94 H	257	22.9	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.4 PK			1.80 V	260	107.8	5.6
2	*5320.00	102.7 AV			1.80 V	260	97.1	5.6
3	5350.00	54.1 PK	74.0	-19.9	1.80 V	260	48.2	5.9
4	5350.00	41.6 AV	54.0	-12.4	1.80 V	260	35.7	5.9
5	10640.00	49.7 PK	74.0	-24.3	1.73 V	163	33.3	16.4
6	10640.00	38.0 AV	54.0	-16.0	1.73 V	163	21.6	16.4
7	15960.00	51.5 PK	74.0	-22.5	1.00 V	240	34.3	17.2
8	15960.00	39.1 AV	54.0	-14.9	1.00 V	240	21.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.6 PK	74.0	-18.4	1.98 H	188	49.6	6.0
2	5460.00	4.3 AV	54.0	-49.7	1.98 H	188	-1.7	6.0
3	#5470.00	60.6 PK	68.2	-7.6	1.98 H	188	54.6	6.0
4	*5500.00	116.8 PK			1.98 H	188	110.8	6.0
5	*5500.00	105.3 AV			1.98 H	188	99.3	6.0
6	11000.00	50.7 PK	74.0	-23.3	1.66 H	245	33.8	16.9
7	11000.00	38.9 AV	54.0	-15.1	1.66 H	245	22.0	16.9
8	#16500.00	54.1 PK	68.2	-14.1	1.96 H	267	34.5	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.8 PK	74.0	-20.2	1.60 V	218	47.8	6.0
2	5460.00	41.5 AV	54.0	-12.5	1.60 V	218	35.5	6.0
3	#5470.00	55.5 PK	68.2	-12.7	1.60 V	218	49.5	6.0
4	*5500.00	112.6 PK			1.60 V	218	106.6	6.0
5	*5500.00	101.7 AV			1.60 V	218	95.7	6.0
6	11000.00	50.1 PK	74.0	-23.9	1.63 V	153	33.2	16.9
7	11000.00	38.3 AV	54.0	-15.7	1.63 V	153	21.4	16.9
8	#16500.00	53.9 PK	68.2	-14.3	1.08 V	227	34.3	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.2 PK			1.36 H	194	107.1	6.1
2	*5700.00	102.4 AV			1.36 H	194	96.3	6.1
3	#5725.00	53.6 PK	68.2	-14.6	1.36 H	194	47.4	6.2
4	11400.00	50.8 PK	74.0	-23.2	1.61 H	238	33.9	16.9
5	11400.00	38.8 AV	54.0	-15.2	1.61 H	238	21.9	16.9
6	#17100.00	54.4 PK	68.2	-13.8	2.01 H	257	34.2	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.1 PK			1.42 V	235	104.0	6.1
2	*5700.00	99.3 AV			1.42 V	235	93.2	6.1
3	#5725.00	53.2 PK	68.2	-15.0	1.42 V	235	47.0	6.2
4	11400.00	49.8 PK	74.0	-24.2	1.70 V	163	32.9	16.9
5	11400.00	38.2 AV	54.0	-15.8	1.70 V	163	21.3	16.9
6	#17100.00	54.1 PK	68.2	-14.1	1.08 V	218	33.9	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.9 PK	74.0	-21.1	1.26 H	167	46.9	6.0
2	5460.00	40.2 AV	54.0	-13.8	1.26 H	167	34.2	6.0
3	#5470.00	51.2 PK	68.2	-17.0	1.26 H	167	45.2	6.0
4	*5720.00	116.0 PK			1.26 H	167	109.8	6.2
5	*5720.00	105.8 AV			1.26 H	167	99.6	6.2
6	#5850.00	52.9 PK	68.2	-15.3	1.26 H	167	46.3	6.6
7	11440.00	49.0 PK	74.0	-25.0	1.59 H	326	32.1	16.9
8	11440.00	37.9 AV	54.0	-16.1	1.59 H	326	21.0	16.9
9	#17160.00	55.0 PK	68.2	-13.2	1.47 H	317	35.0	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.6 PK	74.0	-21.4	1.45 V	216	46.6	6.0
2	5460.00	40.1 AV	54.0	-13.9	1.45 V	216	34.1	6.0
3	#5470.00	51.3 PK	68.2	-16.9	1.45 V	216	45.3	6.0
4	*5720.00	112.8 PK			1.45 V	216	106.6	6.2
5	*5720.00	102.0 AV			1.45 V	216	95.8	6.2
6	#5850.00	52.9 PK	68.2	-15.3	1.45 V	216	46.3	6.6
7	11440.00	49.0 PK	74.0	-25.0	1.61 V	338	32.1	16.9
8	11440.00	38.2 AV	54.0	-15.8	1.61 V	338	21.3	16.9
9	#17160.00	54.0 PK	68.2	-14.2	1.50 V	314	34.0	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.75	53.6 PK	68.2	-14.6	1.75 H	351	47.5	6.1
2	*5745.00	122.0 PK			1.75 H	351	115.7	6.3
3	*5745.00	113.8 AV			1.75 H	351	107.5	6.3
4	#5937.54	52.9 PK	68.2	-15.3	1.75 H	351	46.1	6.8
5	11490.00	49.1 PK	74.0	-24.9	1.61 H	333	32.1	17.0
6	11490.00	37.7 AV	54.0	-16.3	1.61 H	333	20.7	17.0
7	#17235.00	54.2 PK	68.2	-14.0	1.52 H	308	33.7	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5627.86	52.7 PK	68.2	-15.5	1.74 V	132	46.6	6.1
2	*5745.00	119.4 PK			1.74 V	132	113.1	6.3
3	*5745.00	110.1 AV			1.74 V	132	103.8	6.3
4	#5947.56	51.4 PK	68.2	-16.8	1.74 V	132	44.7	6.7
5	11490.00	49.2 PK	74.0	-24.8	1.50 V	330	32.2	17.0
6	11490.00	38.4 AV	54.0	-15.6	1.50 V	330	21.4	17.0
7	#17235.00	53.6 PK	68.2	-14.6	1.53 V	314	33.1	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5616.50	54.6 PK	68.2	-13.6	1.87 H	349	48.5	6.1
2	*5825.00	122.4 PK			1.87 H	349	115.7	6.7
3	*5825.00	113.6 AV			1.87 H	349	106.9	6.7
4	#5926.43	54.2 PK	68.2	-14.0	1.87 H	349	47.4	6.8
5	11650.00	49.9 PK	74.0	-24.1	1.60 H	310	33.1	16.8
6	11650.00	38.6 AV	54.0	-15.4	1.60 H	310	21.8	16.8
7	#17475.00	54.3 PK	68.2	-13.9	1.45 H	311	31.5	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.31	52.5 PK	68.2	-15.7	1.96 V	306	46.4	6.1
2	*5825.00	117.4 PK			1.96 V	306	110.7	6.7
3	*5825.00	108.4 AV			1.96 V	306	101.7	6.7
4	#5947.10	52.5 PK	68.2	-15.7	1.96 V	306	45.8	6.7
5	11650.00	49.0 PK	74.0	-25.0	1.50 V	336	32.2	16.8
6	11650.00	38.2 AV	54.0	-15.8	1.50 V	336	21.4	16.8
7	#17475.00	54.0 PK	68.2	-14.2	1.47 V	307	31.2	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5123.00	62.0 PK	74.0	-12.0	2.08 H	167	55.9	6.1
2	5123.00	52.5 AV	54.0	-1.5	2.08 H	167	46.4	6.1
3	*5210.00	106.6 PK			2.08 H	167	100.9	5.7
4	*5210.00	96.2 AV			2.08 H	167	90.5	5.7
5	5350.00	52.6 PK	74.0	-21.4	2.08 H	167	46.7	5.9
6	5350.00	41.1 AV	54.0	-12.9	2.08 H	167	35.2	5.9
7	#10420.00	50.1 PK	68.2	-18.1	1.68 H	213	34.0	16.1
8	15630.00	59.8 PK	74.0	-14.2	2.00 H	215	42.8	17.0
9	15630.00	46.8 AV	54.0	-7.2	2.00 H	215	29.8	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5123.00	57.2 PK	74.0	-16.8	1.49 V	312	51.1	6.1
2	5123.00	49.2 AV	54.0	-4.8	1.49 V	312	43.1	6.1
3	*5210.00	102.5 PK			1.49 V	312	96.8	5.7
4	*5210.00	92.0 AV			1.49 V	312	86.3	5.7
5	5350.00	52.0 PK	74.0	-22.0	1.49 V	312	46.1	5.9
6	5350.00	40.3 AV	54.0	-13.7	1.49 V	312	34.4	5.9
7	#10420.00	48.5 PK	68.2	-19.7	1.67 V	161	32.4	16.1
8	15630.00	57.5 PK	74.0	-16.5	1.04 V	221	40.5	17.0
9	15630.00	43.1 AV	54.0	-10.9	1.04 V	221	26.1	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.3 PK	74.0	-19.7	1.26 H	166	48.3	6.0
2	5150.00	41.8 AV	54.0	-12.2	1.26 H	166	35.8	6.0
3	*5290.00	107.4 PK			1.26 H	166	102.0	5.4
4	*5290.00	96.5 AV			1.26 H	166	91.1	5.4
5	5350.00	67.6 PK	74.0	-6.4	1.26 H	166	61.7	5.9
6	5350.00	52.4 AV	54.0	-1.6	1.26 H	166	46.5	5.9
7	#10580.00	50.1 PK	68.2	-18.1	1.72 H	226	33.8	16.3
8	15870.00	59.7 PK	74.0	-14.3	1.96 H	222	42.4	17.3
9	15870.00	46.6 AV	54.0	-7.4	1.96 H	222	29.3	17.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.0 PK	74.0	-22.0	1.90 V	318	46.0	6.0
2	5150.00	40.9 AV	54.0	-13.1	1.90 V	318	34.9	6.0
3	*5290.00	105.1 PK			1.90 V	318	99.7	5.4
4	*5290.00	93.9 AV			1.90 V	318	88.5	5.4
5	5350.00	62.8 PK	74.0	-11.2	1.90 V	318	56.9	5.9
6	5350.00	46.8 AV	54.0	-7.2	1.90 V	318	40.9	5.9
7	#10580.00	48.9 PK	68.2	-19.3	1.67 V	158	32.6	16.3
8	15870.00	57.1 PK	74.0	-16.9	1.06 V	208	39.8	17.3
9	15870.00	42.8 AV	54.0	-11.2	1.06 V	208	25.5	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.7 PK	74.0	-9.3	2.10 H	178	58.7	6.0
2	5460.00	50.1 AV	54.0	-3.9	2.10 H	178	44.1	6.0
3	#5470.00	66.7 PK	68.2	-1.5	2.10 H	178	60.7	6.0
4	*5530.00	109.5 PK			2.10 H	178	103.5	6.0
5	*5530.00	97.3 AV			2.10 H	178	91.3	6.0
6	#5725.00	53.4 PK	68.2	-14.8	2.10 H	178	47.2	6.2
7	11060.00	50.2 PK	74.0	-23.8	1.67 H	249	33.3	16.9
8	11060.00	38.7 AV	54.0	-15.3	1.67 H	249	21.8	16.9
9	#16590.00	53.9 PK	68.2	-14.3	1.93 H	255	33.5	20.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.1 PK	74.0	-10.9	1.76 V	278	57.1	6.0
2	5460.00	46.6 AV	54.0	-7.4	1.76 V	278	40.6	6.0
3	#5470.00	63.2 PK	68.2	-5.0	1.76 V	278	57.2	6.0
4	*5530.00	105.6 PK			1.76 V	278	99.6	6.0
5	*5530.00	94.3 AV			1.76 V	278	88.3	6.0
6	#5725.00	53.1 PK	68.2	-15.1	1.76 V	278	46.9	6.2
7	11060.00	49.2 PK	74.0	-24.8	1.62 V	184	32.3	16.9
8	11060.00	37.7 AV	54.0	-16.3	1.62 V	184	20.8	16.9
9	#16590.00	54.1 PK	68.2	-14.1	1.00 V	239	33.7	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	109.1 PK			1.98 H	184	103.2	5.9
2	*5610.00	97.9 AV			1.98 H	184	92.0	5.9
3	#5725.00	66.5 PK	68.2	-1.7	1.98 H	184	60.3	6.2
4	11220.00	51.3 PK	74.0	-22.7	1.60 H	238	34.6	16.7
5	11220.00	39.1 AV	54.0	-14.9	1.60 H	238	22.4	16.7
6	#16830.00	54.1 PK	68.2	-14.1	1.98 H	246	32.9	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	107.8 PK			1.90 V	274	101.9	5.9
2	*5610.00	96.8 AV			1.90 V	274	90.9	5.9
3	#5725.00	63.6 PK	68.2	-4.6	1.90 V	274	57.4	6.2
4	11220.00	49.7 PK	74.0	-24.3	1.71 V	160	33.0	16.7
5	11220.00	37.9 AV	54.0	-16.1	1.71 V	160	21.2	16.7
6	#16830.00	53.7 PK	68.2	-14.5	1.09 V	221	32.5	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.3 PK	74.0	-17.7	1.94 H	180	50.3	6.0
2	5460.00	41.6 AV	54.0	-12.4	1.94 H	180	35.6	6.0
3	#5470.00	56.8 PK	68.2	-11.4	1.94 H	180	50.8	6.0
4	*5690.00	110.0 PK			1.94 H	180	103.9	6.1
5	*5690.00	100.5 AV			1.94 H	180	94.4	6.1
6	#5850.00	66.3 PK	68.2	-1.9	1.94 H	180	59.7	6.6
7	11380.00	49.6 PK	74.0	-24.4	1.55 H	329	32.6	17.0
8	11380.00	38.4 AV	54.0	-15.6	1.55 H	329	21.4	17.0
9	#17070.00	54.6 PK	68.2	-13.6	1.54 H	317	34.2	20.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	2.01 V	276	51.2	6.0
2	5460.00	41.2 AV	54.0	-12.8	2.01 V	276	35.2	6.0
3	#5470.00	58.8 PK	68.2	-9.4	2.01 V	276	52.8	6.0
4	*5690.00	107.8 PK			2.01 V	276	101.7	6.1
5	*5690.00	97.7 AV			2.01 V	276	91.6	6.1
6	#5850.00	62.6 PK	68.2	-5.6	2.01 V	276	56.0	6.6
7	11380.00	48.9 PK	74.0	-25.1	1.60 V	343	31.9	17.0
8	11380.00	37.9 AV	54.0	-16.1	1.60 V	343	20.9	17.0
9	#17070.00	53.5 PK	68.2	-14.7	1.45 V	323	33.1	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.71	65.4 PK	68.2	-2.8	2.12 H	179	59.4	6.0
2	*5775.00	112.3 PK			2.12 H	179	105.8	6.5
3	*5775.00	101.0 AV			2.12 H	179	94.5	6.5
4	#5931.44	66.7 PK	68.2	-1.5	2.12 H	179	60.3	6.4
5	11550.00	49.5 PK	74.0	-24.5	1.51 H	323	32.5	17.0
6	11550.00	38.1 AV	54.0	-15.9	1.51 H	323	21.1	17.0
7	#17325.00	54.6 PK	68.2	-13.6	1.57 H	302	33.8	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5626.37	66.5 PK	68.2	-1.7	1.97 V	277	60.6	5.9
2	*5775.00	109.0 PK			1.97 V	277	102.5	6.5
3	*5775.00	98.5 AV			1.97 V	277	92.0	6.5
4	#5927.54	63.7 PK	68.2	-4.5	1.97 V	277	57.3	6.4
5	11550.00	49.2 PK	74.0	-24.8	1.58 V	321	32.2	17.0
6	11550.00	38.2 AV	54.0	-15.8	1.58 V	321	21.2	17.0
7	#17325.00	54.6 PK	68.2	-13.6	1.46 V	309	33.8	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.7 PK	74.0	-9.3	1.50 H	164	58.7	6.0
2	5150.00	52.3 AV	54.0	-1.7	1.50 H	164	46.3	6.0
3	*5250.00	100.3 PK			1.50 H	164	94.8	5.5
4	*5250.00	89.6 AV			1.50 H	164	84.1	5.5
5	5350.00	60.2 PK	74.0	-13.8	1.50 H	164	54.3	5.9
6	5350.00	46.7 AV	54.0	-7.3	1.50 H	164	40.8	5.9
7	#10500.00	49.2 PK	68.2	-19.0	1.72 H	236	33.3	15.9
8	15750.00	58.6 PK	74.0	-15.4	2.02 H	211	41.4	17.2
9	15750.00	45.5 AV	54.0	-8.5	2.02 H	211	28.3	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.9 PK	74.0	-11.1	1.87 V	262	56.9	6.0
2	5150.00	51.2 AV	54.0	-2.8	1.87 V	262	45.2	6.0
3	*5250.00	98.3 PK			1.87 V	262	92.8	5.5
4	*5250.00	87.7 AV			1.87 V	262	82.2	5.5
5	5350.00	61.7 PK	74.0	-12.3	1.87 V	262	55.8	5.9
6	5350.00	46.4 AV	54.0	-7.6	1.87 V	262	40.5	5.9
7	#10500.00	47.0 PK	68.2	-21.2	1.67 V	170	31.1	15.9
8	15750.00	56.0 PK	74.0	-18.0	1.02 V	223	38.8	17.2
9	15750.00	41.7 AV	54.0	-12.3	1.02 V	223	24.5	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	67.8 PK	74.0	-6.2	1.20 H	180	61.8	6.0
2	5460.00	49.4 AV	54.0	-4.6	1.20 H	180	43.4	6.0
3	#5470.00	61.1 PK	68.2	-7.1	1.20 H	180	55.1	6.0
4	*5570.00	103.9 PK			1.20 H	180	98.0	5.9
5	*5570.00	92.0 AV			1.20 H	180	86.1	5.9
6	#5725.00	66.7 PK	68.2	-1.5	1.20 H	180	60.5	6.2
7	11140.00	51.2 PK	74.0	-22.8	1.59 H	232	34.5	16.7
8	11140.00	39.0 AV	54.0	-15.0	1.59 H	232	22.3	16.7
9	#16710.00	54.7 PK	68.2	-13.5	2.03 H	270	33.2	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	67.2 PK	74.0	-6.8	1.78 V	262	61.2	6.0
2	5460.00	47.0 AV	54.0	-7.0	1.78 V	262	41.0	6.0
3	#5470.00	58.3 PK	68.2	-9.9	1.78 V	262	52.3	6.0
4	*5570.00	102.0 PK			1.78 V	262	96.1	5.9
5	*5570.00	90.5 AV			1.78 V	262	84.6	5.9
6	#5725.00	65.5 PK	68.2	-2.7	1.78 V	262	59.3	6.2
7	11140.00	50.1 PK	74.0	-23.9	1.70 V	156	33.4	16.7
8	11140.00	38.5 AV	54.0	-15.5	1.70 V	156	21.8	16.7
9	#16710.00	53.4 PK	68.2	-14.8	1.00 V	220	31.9	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.5 PK	74.0	-9.5	1.94 H	178	58.5	6.0
2	5150.00	52.2 AV	54.0	-1.8	1.94 H	178	46.2	6.0
3	*5250.00	101.6 PK			1.94 H	178	96.1	5.5
4	*5250.00	89.8 AV			1.94 H	178	84.3	5.5
5	5350.00	60.8 PK	74.0	-13.2	1.94 H	178	54.9	5.9
6	5350.00	47.8 AV	54.0	-6.2	1.94 H	178	41.9	5.9
7	#10500.00	49.3 PK	68.2	-18.9	1.68 H	249	33.4	15.9
8	15750.00	58.5 PK	74.0	-15.5	2.07 H	210	41.3	17.2
9	15750.00	45.4 AV	54.0	-8.6	2.07 H	210	28.2	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.6 PK	74.0	-11.4	1.88 V	260	56.6	6.0
2	5150.00	50.4 AV	54.0	-3.6	1.88 V	260	44.4	6.0
3	*5250.00	98.0 PK			1.88 V	260	92.5	5.5
4	*5250.00	87.2 AV			1.88 V	260	81.7	5.5
5	5350.00	60.9 PK	74.0	-13.1	1.88 V	260	55.0	5.9
6	5350.00	47.2 AV	54.0	-6.8	1.88 V	260	41.3	5.9
7	#10500.00	46.8 PK	68.2	-21.4	1.70 V	172	30.9	15.9
8	15750.00	56.7 PK	74.0	-17.3	1.05 V	230	39.5	17.2
9	15750.00	42.1 AV	54.0	-11.9	1.05 V	230	24.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	71.2 PK	74.0	-2.8	2.21 H	177	65.2	6.0
2	5460.00	50.8 AV	54.0	-3.2	2.21 H	177	44.8	6.0
3	#5470.00	63.2 PK	68.2	-5.0	2.21 H	177	57.2	6.0
4	*5570.00	103.9 PK			2.21 H	177	98.0	5.9
5	*5570.00	92.3 AV			2.21 H	177	86.4	5.9
6	#5725.00	66.7 PK	68.2	-1.5	2.21 H	177	60.5	6.2
7	11140.00	51.0 PK	74.0	-23.0	1.57 H	256	34.3	16.7
8	11140.00	39.2 AV	54.0	-14.8	1.57 H	256	22.5	16.7
9	#16710.00	54.1 PK	68.2	-14.1	1.93 H	251	32.6	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.5 PK	74.0	-11.5	1.70 V	263	56.5	6.0
2	5460.00	46.5 AV	54.0	-7.5	1.70 V	263	40.5	6.0
3	#5470.00	59.5 PK	68.2	-8.7	1.70 V	263	53.5	6.0
4	*5570.00	100.9 PK			1.70 V	263	95.0	5.9
5	*5570.00	89.7 AV			1.70 V	263	83.8	5.9
6	#5725.00	63.9 PK	68.2	-4.3	1.70 V	263	57.7	6.2
7	11140.00	49.9 PK	74.0	-24.1	1.71 V	180	33.2	16.7
8	11140.00	38.2 AV	54.0	-15.8	1.71 V	180	21.5	16.7
9	#16710.00	53.5 PK	68.2	-14.7	1.07 V	225	32.0	21.5


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


MODE A_CDD Plot of Band Edge

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 52+26-tone MRU Channel 36

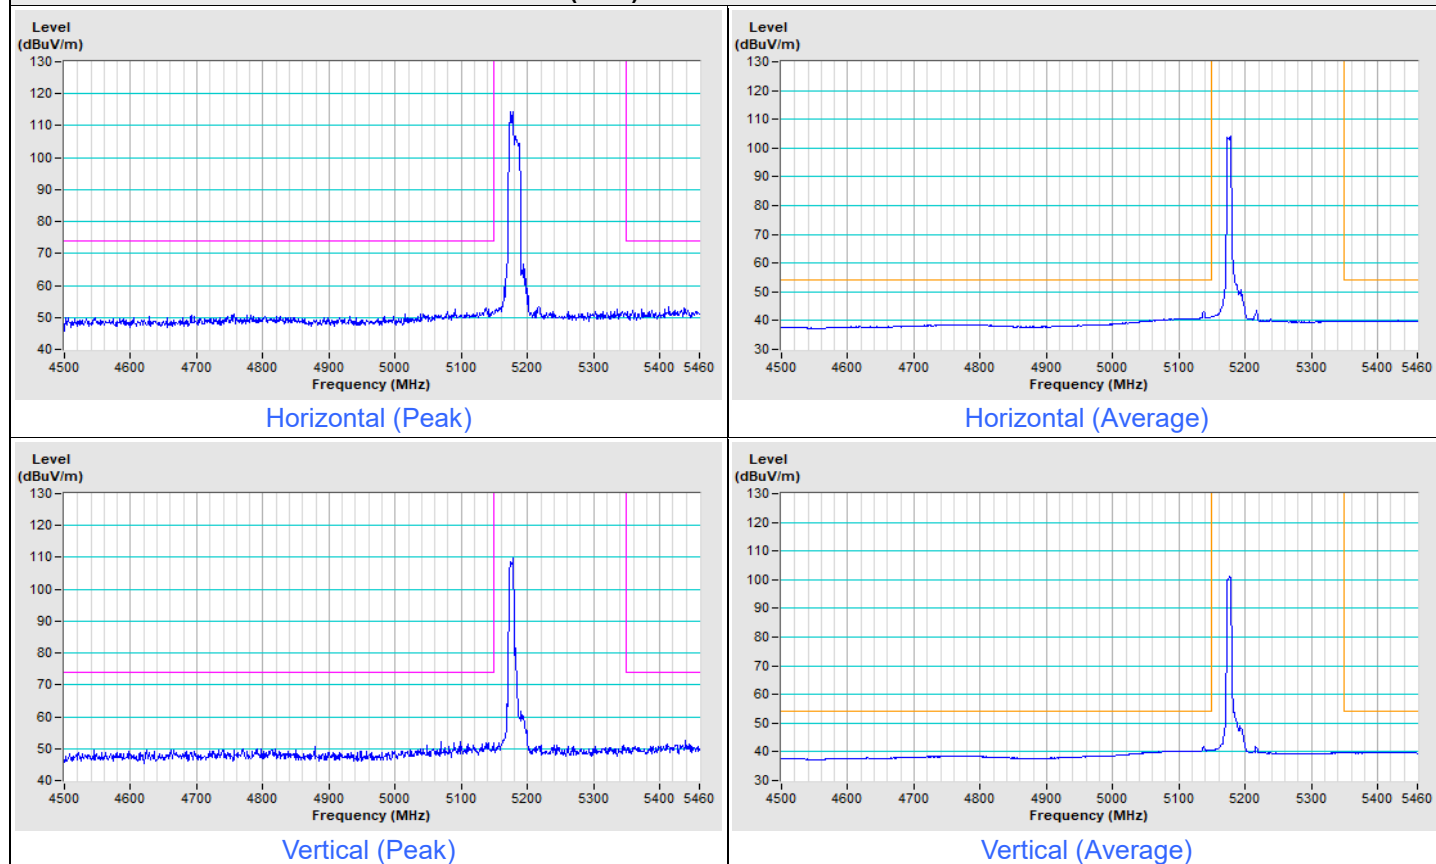


802.11be (EHT) 52+26-tone MRU Channel 64

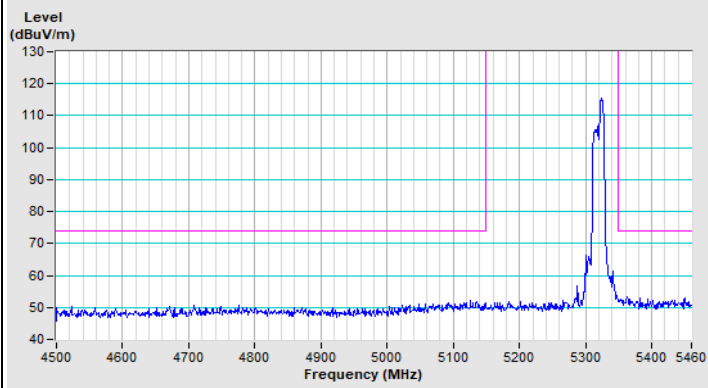


Horizontal (Peak)

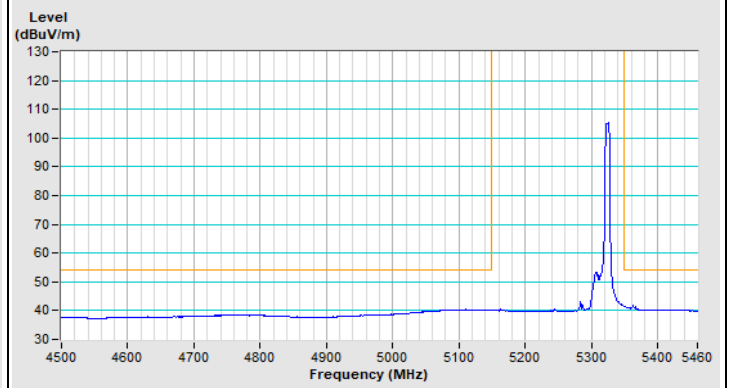

Horizontal (Average)

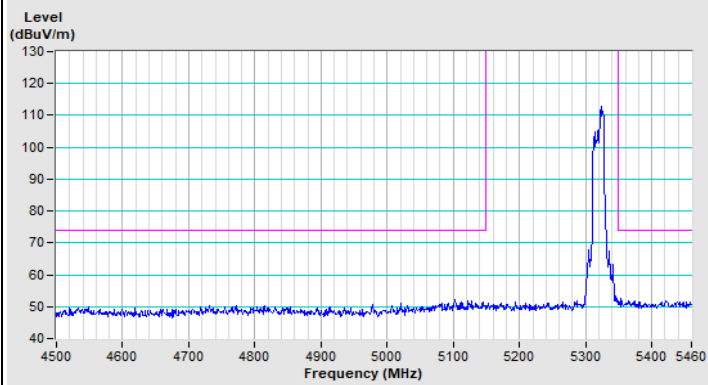


Vertical (Peak)

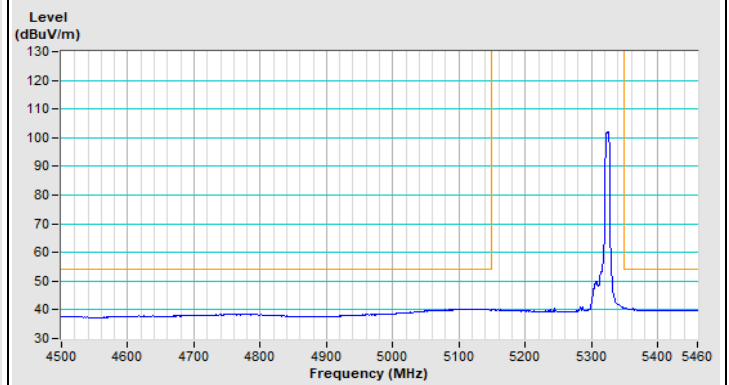

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 52+26-tone MRU Channel 100

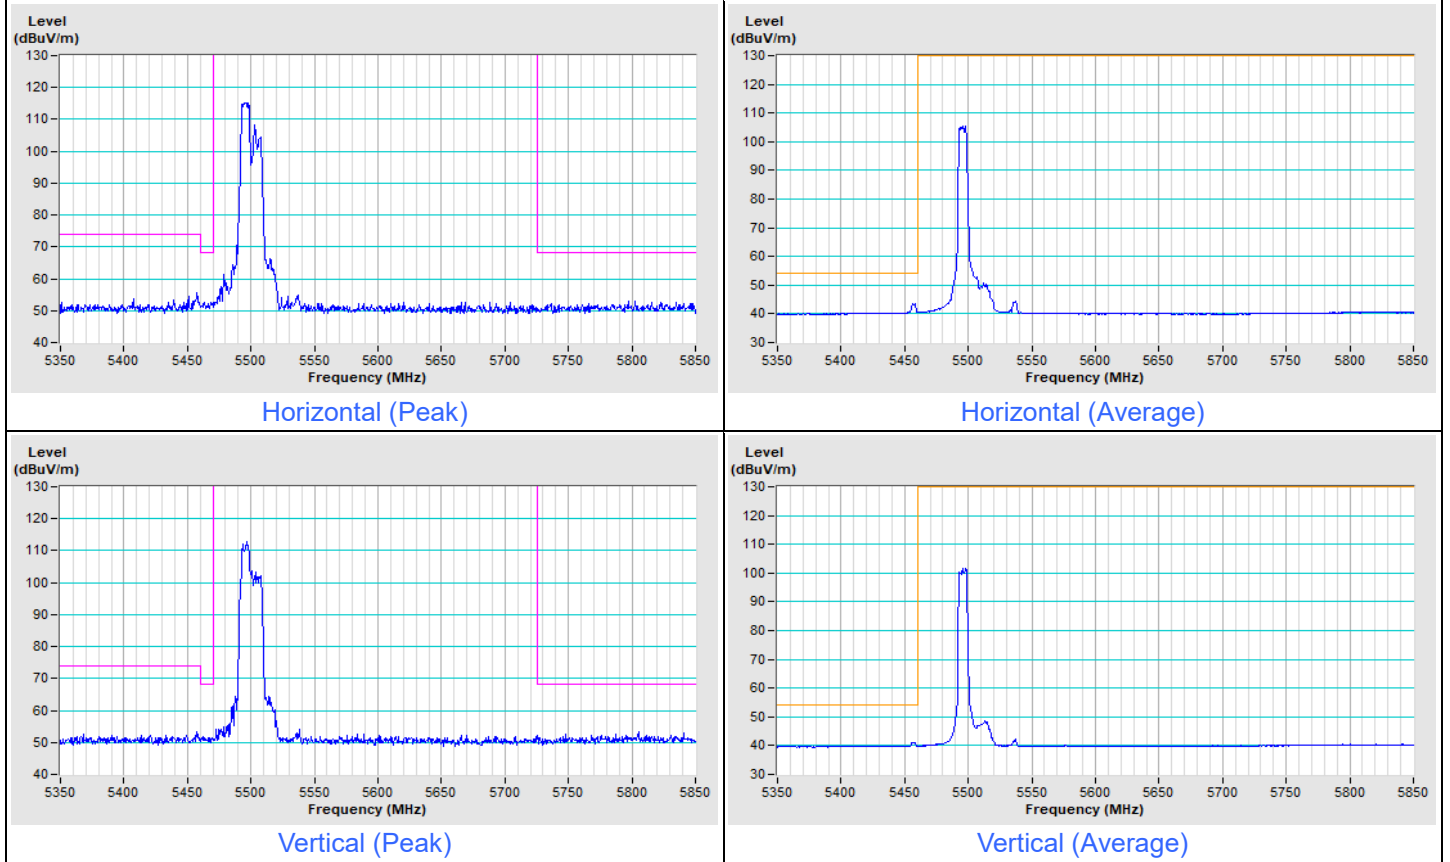


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 52+26-tone MRU Channel 149

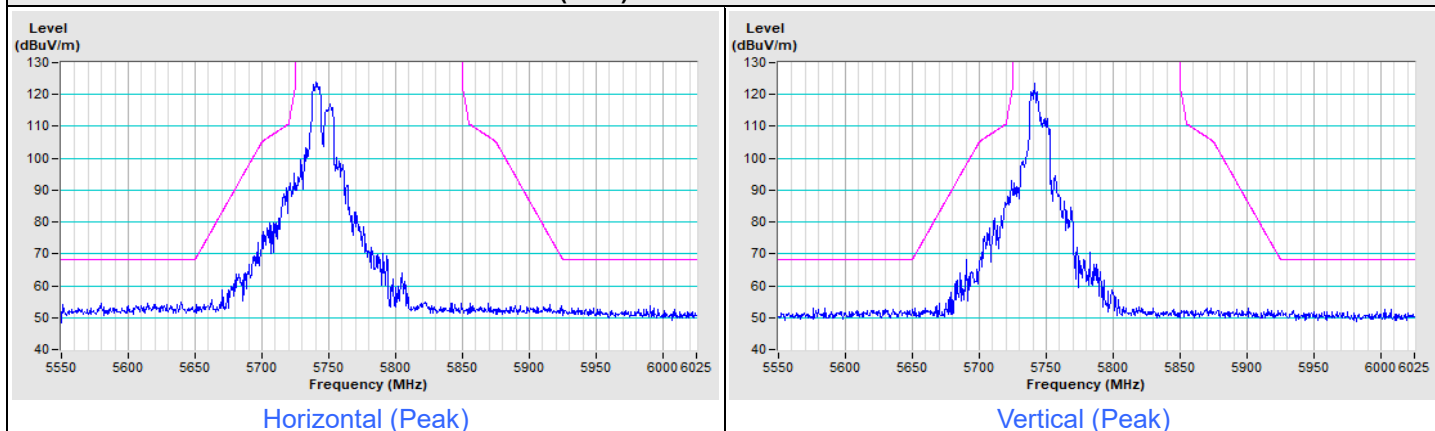


802.11be (EHT) 52+26-tone MRU Channel 165

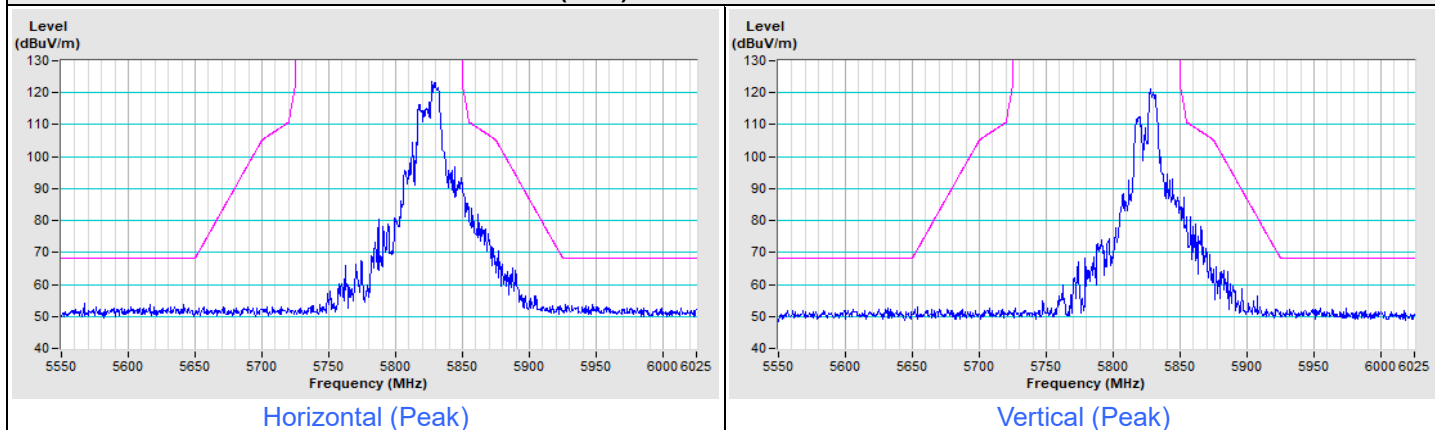


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 106+26-tone MRU Channel 36

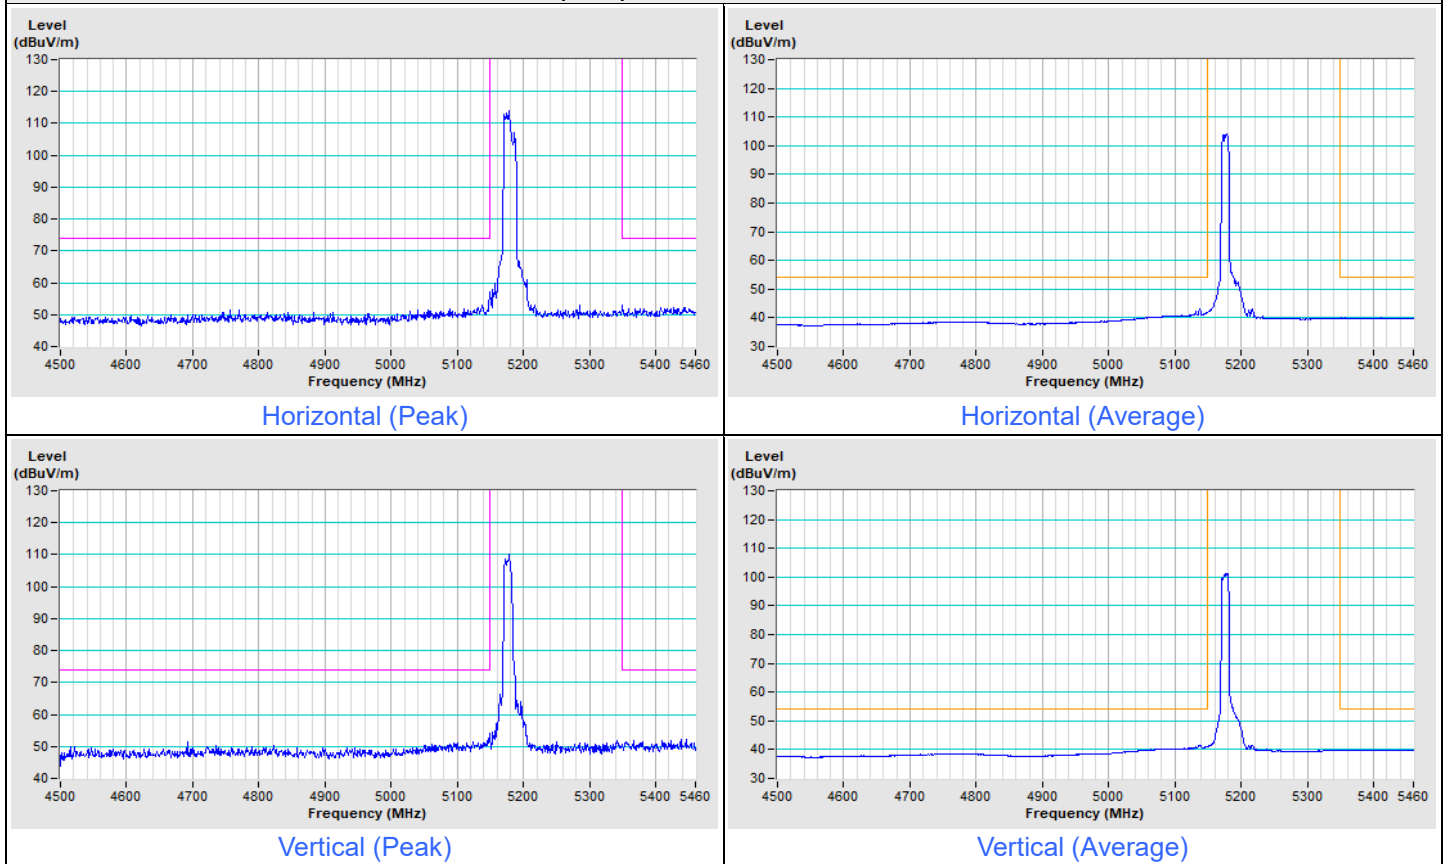


802.11be (EHT) 106+26-tone MRU Channel 64

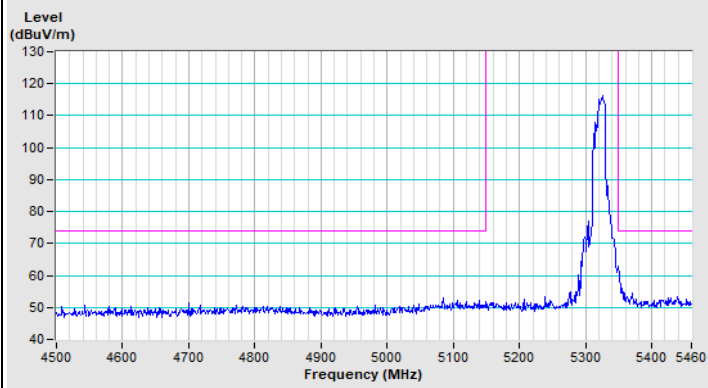


Horizontal (Peak)

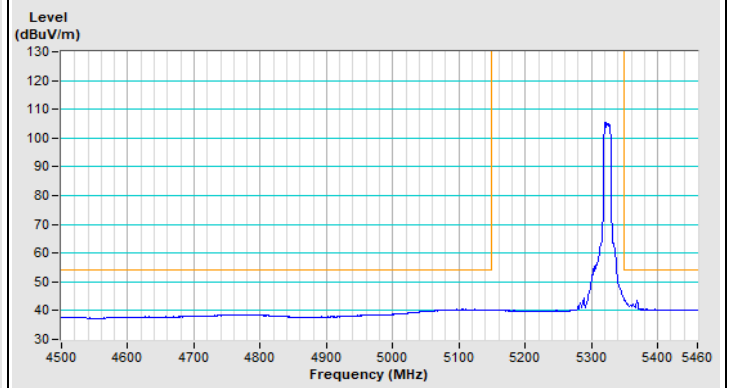

Horizontal (Average)

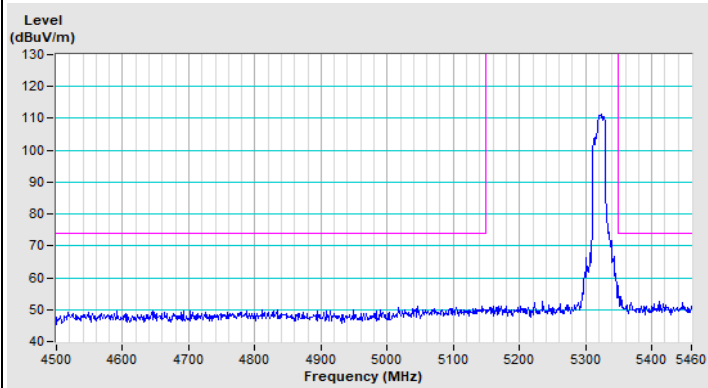


Vertical (Peak)

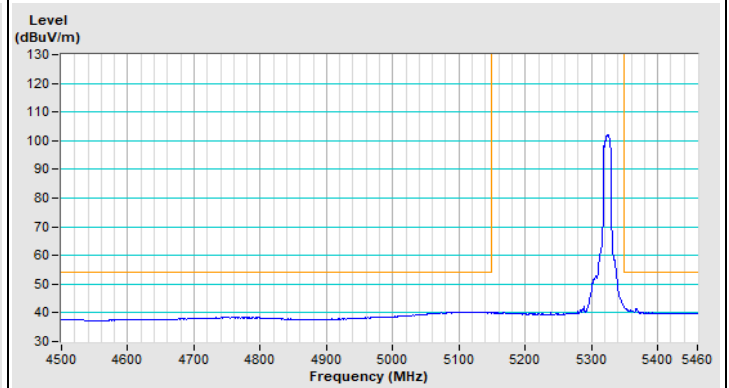

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 106+26-tone MRU Channel 100

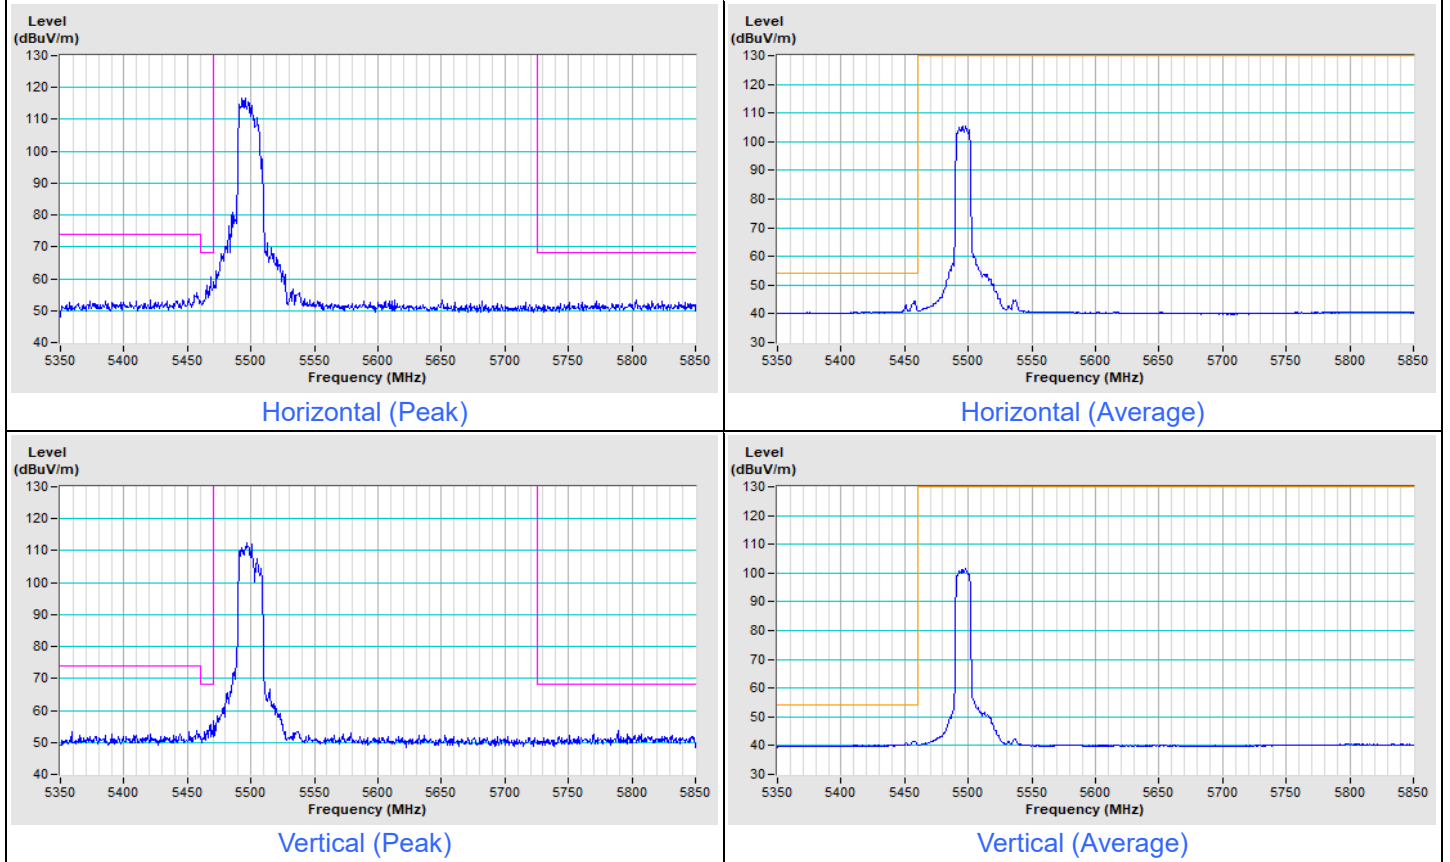


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 106+26-tone MRU Channel 149

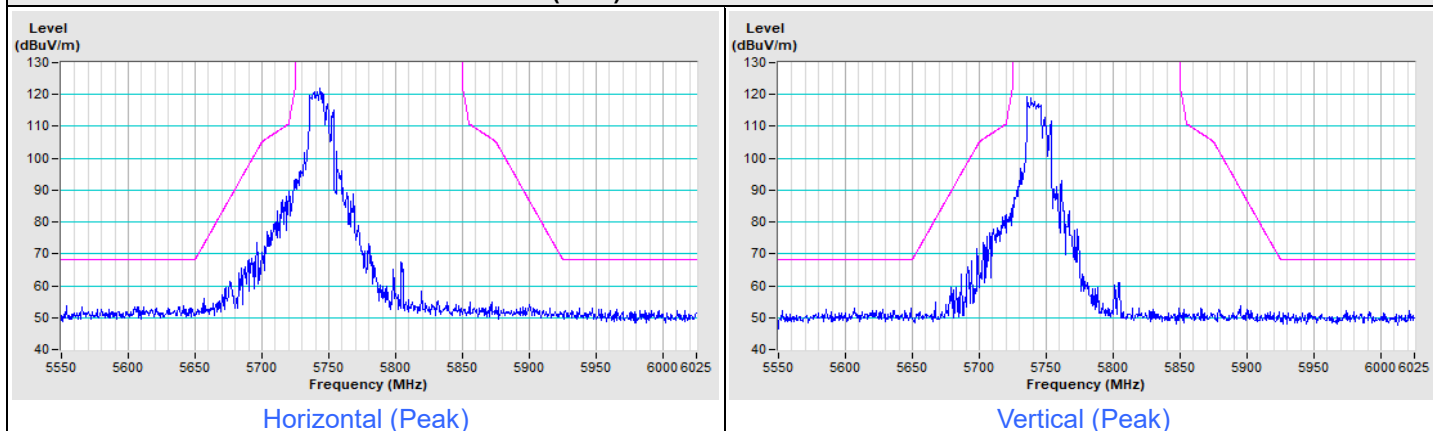


802.11be (EHT) 106+26-tone MRU Channel 165

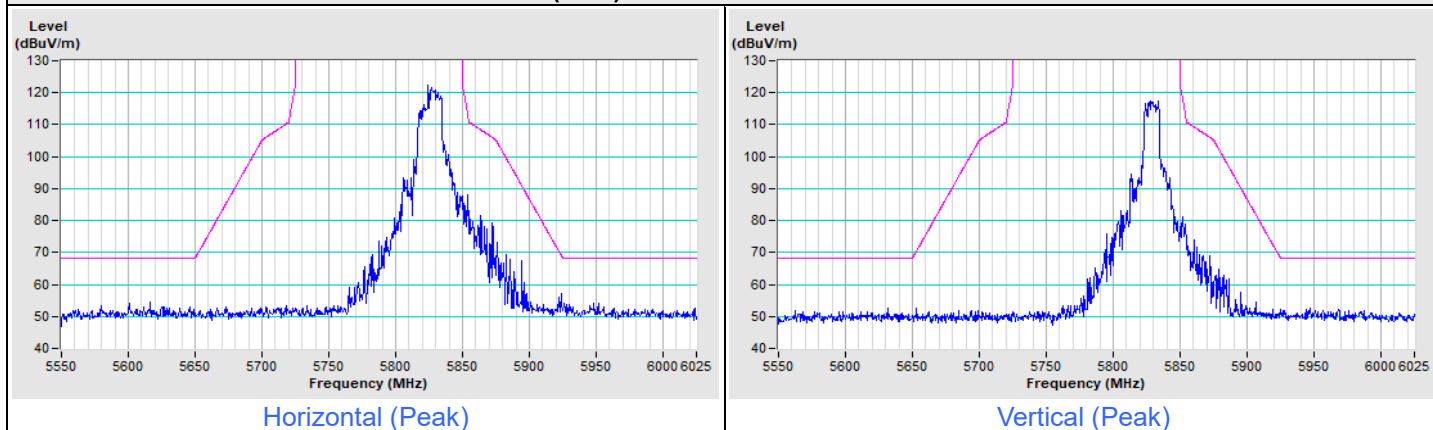


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 484+242-tone MRU Channel 42

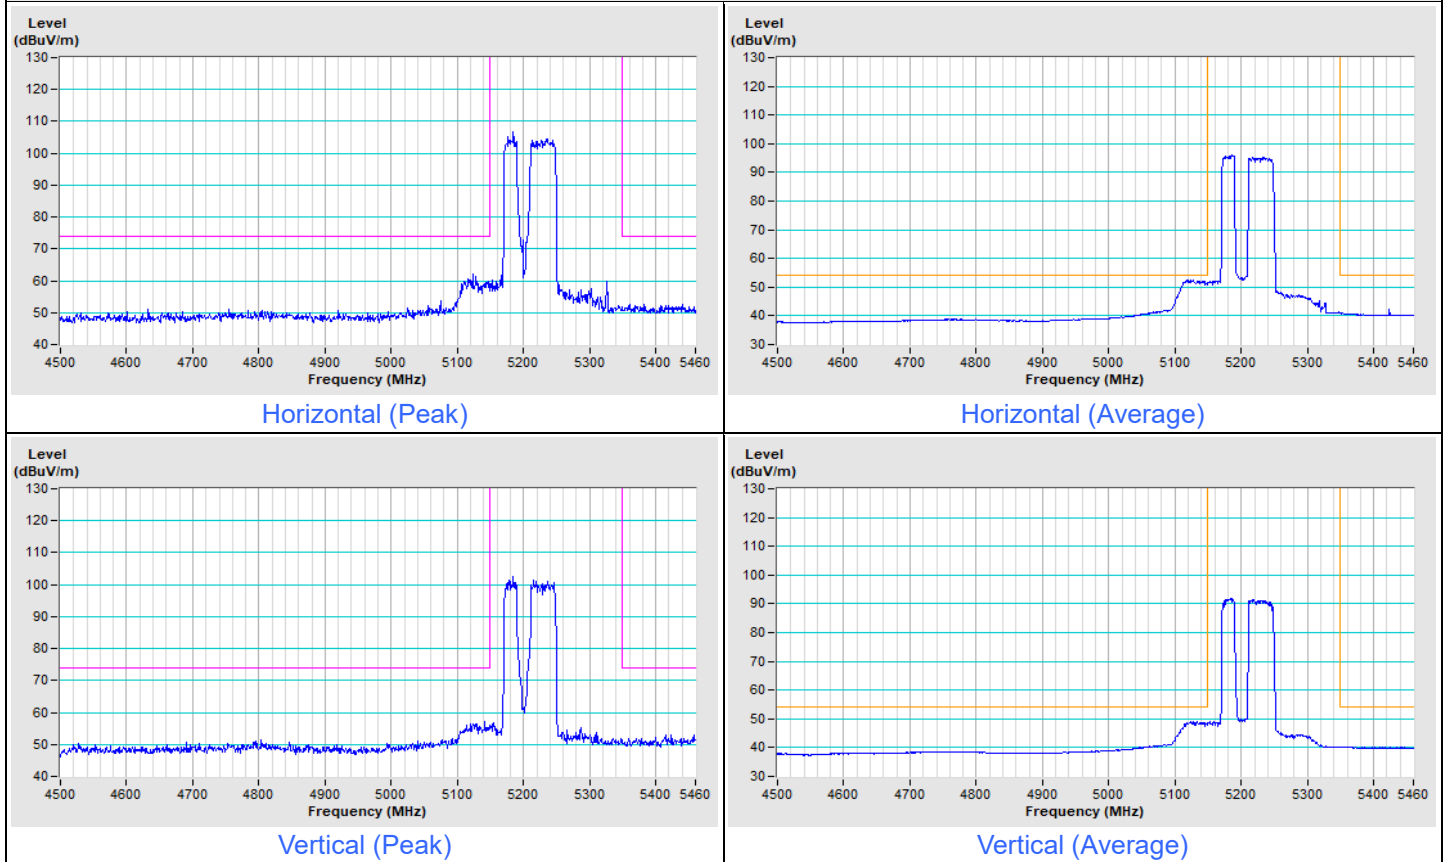


802.11be (EHT) 484+242-tone MRU Channel 58

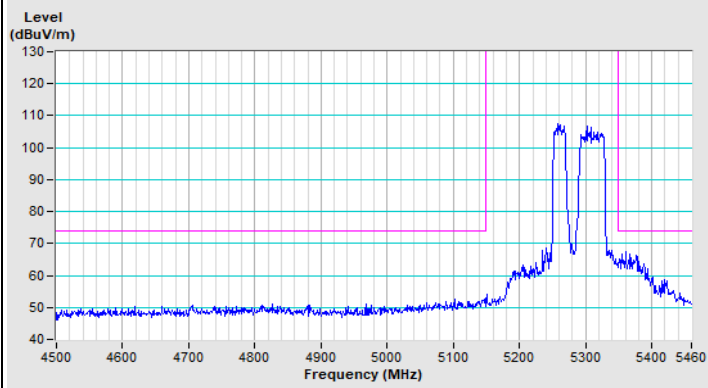


Horizontal (Peak)

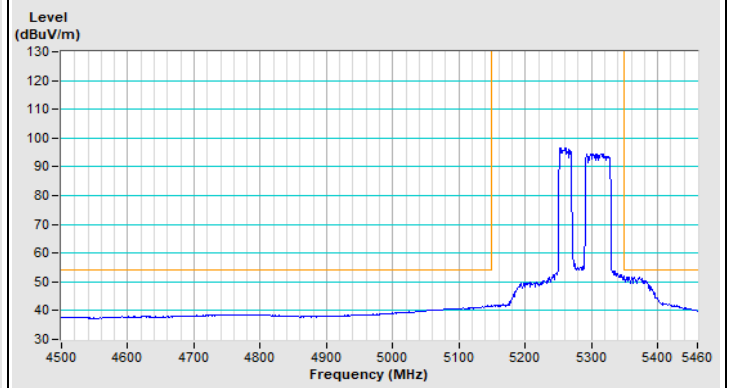

Horizontal (Average)

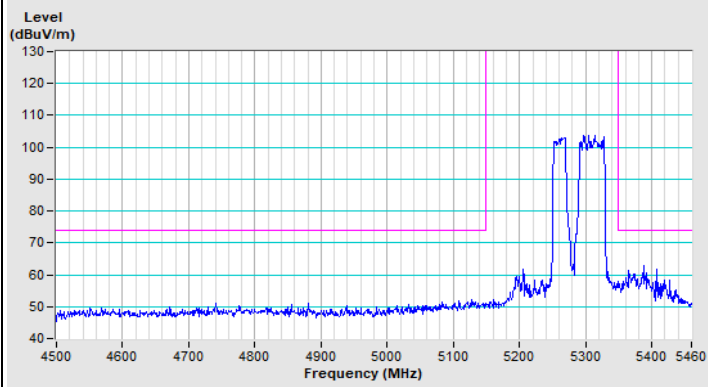


Vertical (Peak)

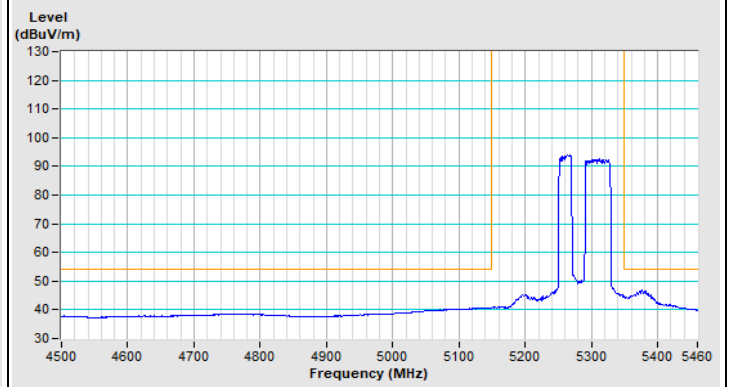

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 484+242-tone MRU Channel 106

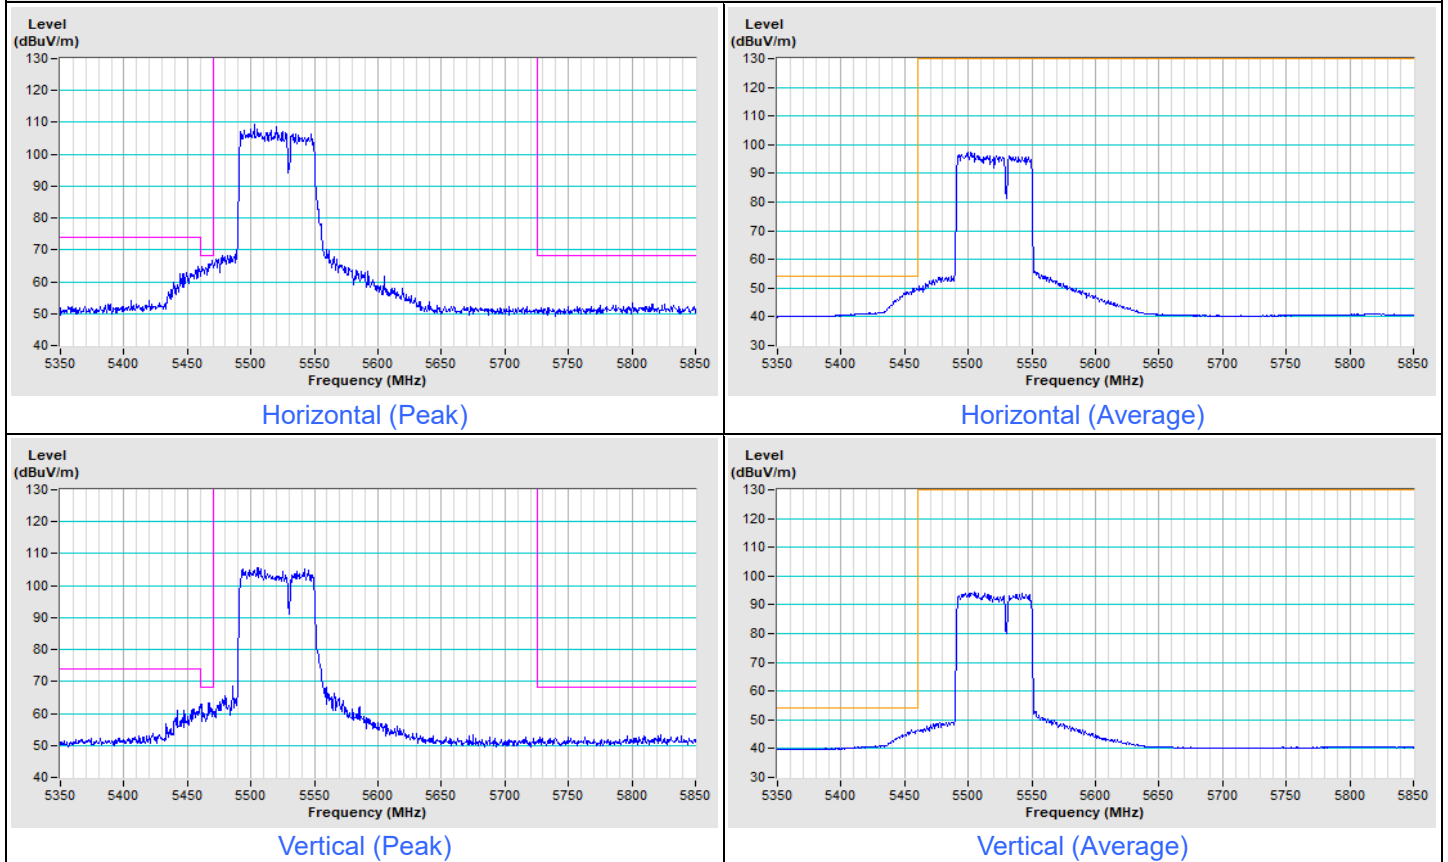


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 484+242-tone MRU Channel 155

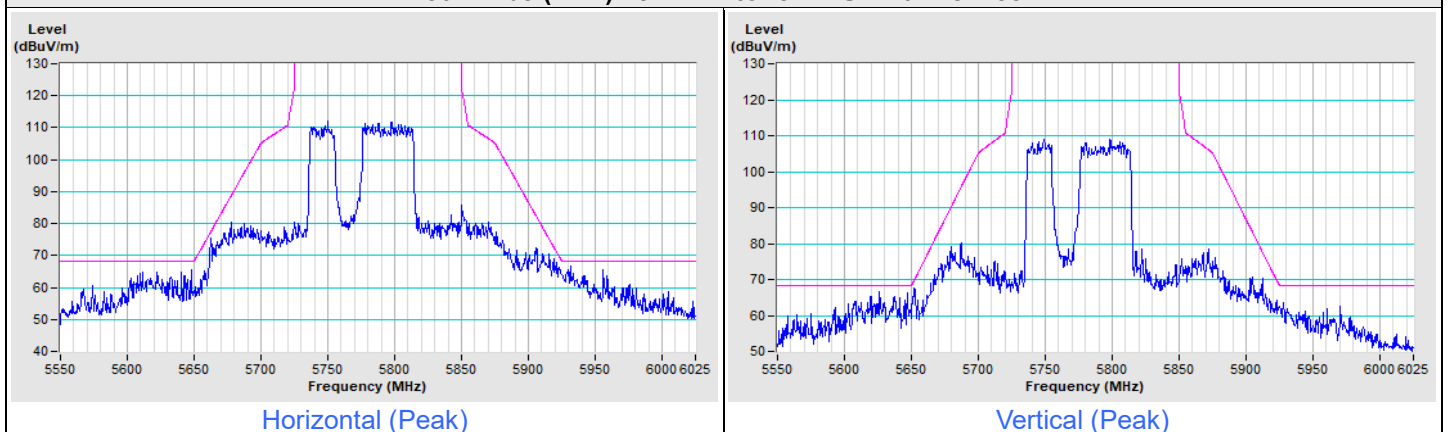


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT) 996+484-tone MRU Channel 50

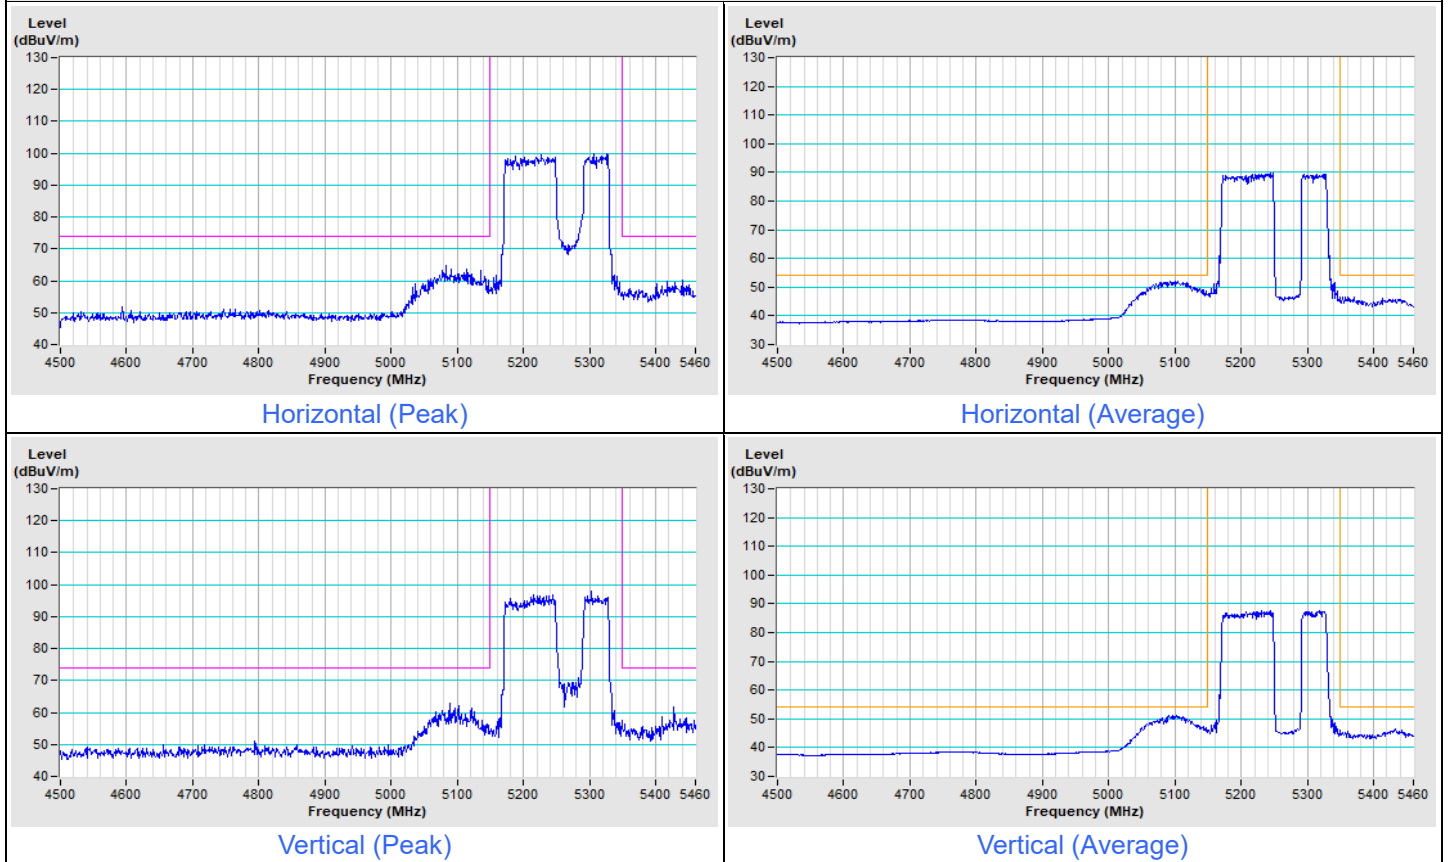


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 996+484-tone MRU Channel 114

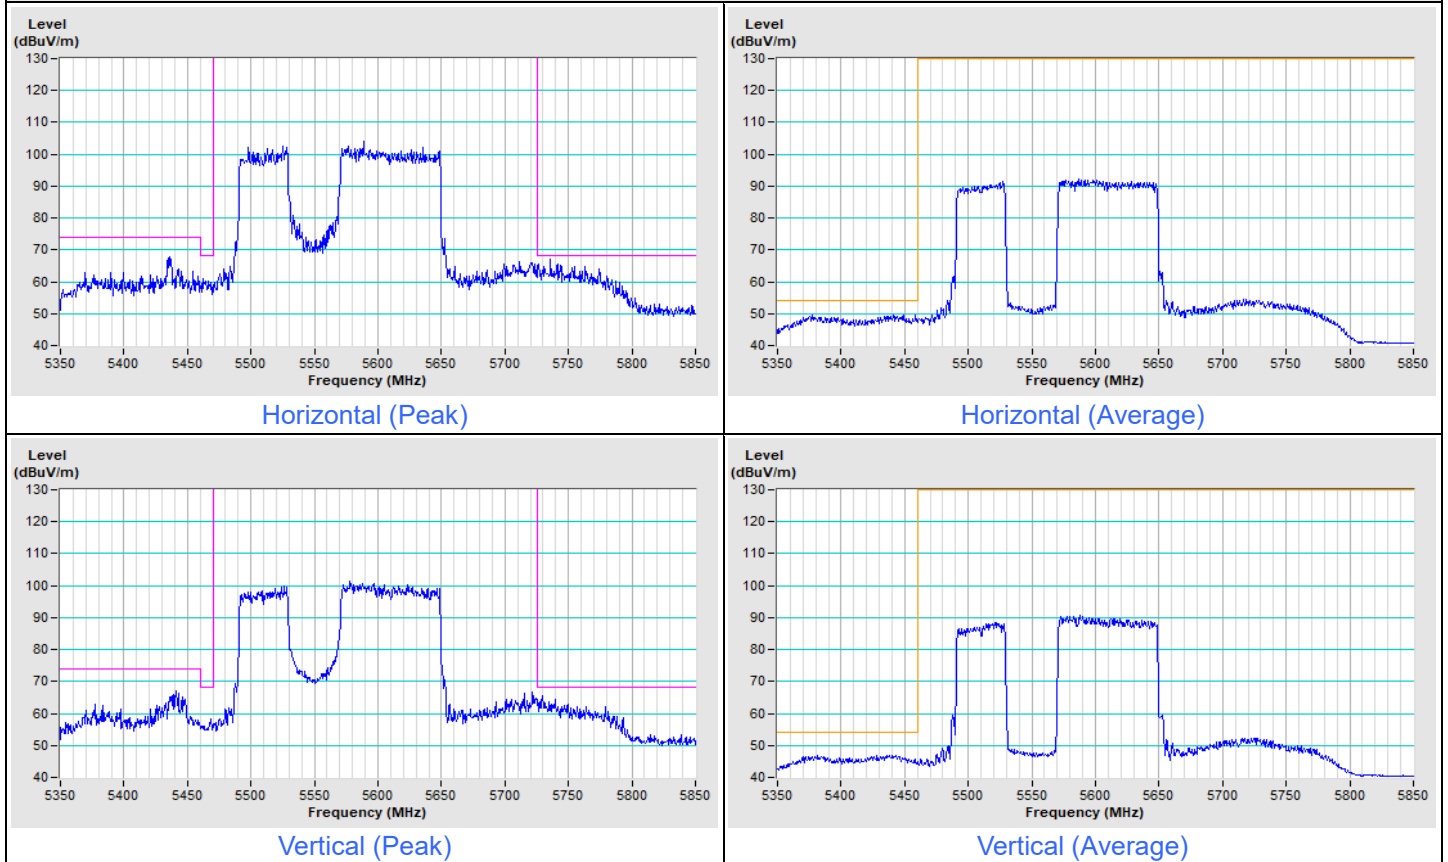


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT) 996+484+242-tone MRU Channel 50

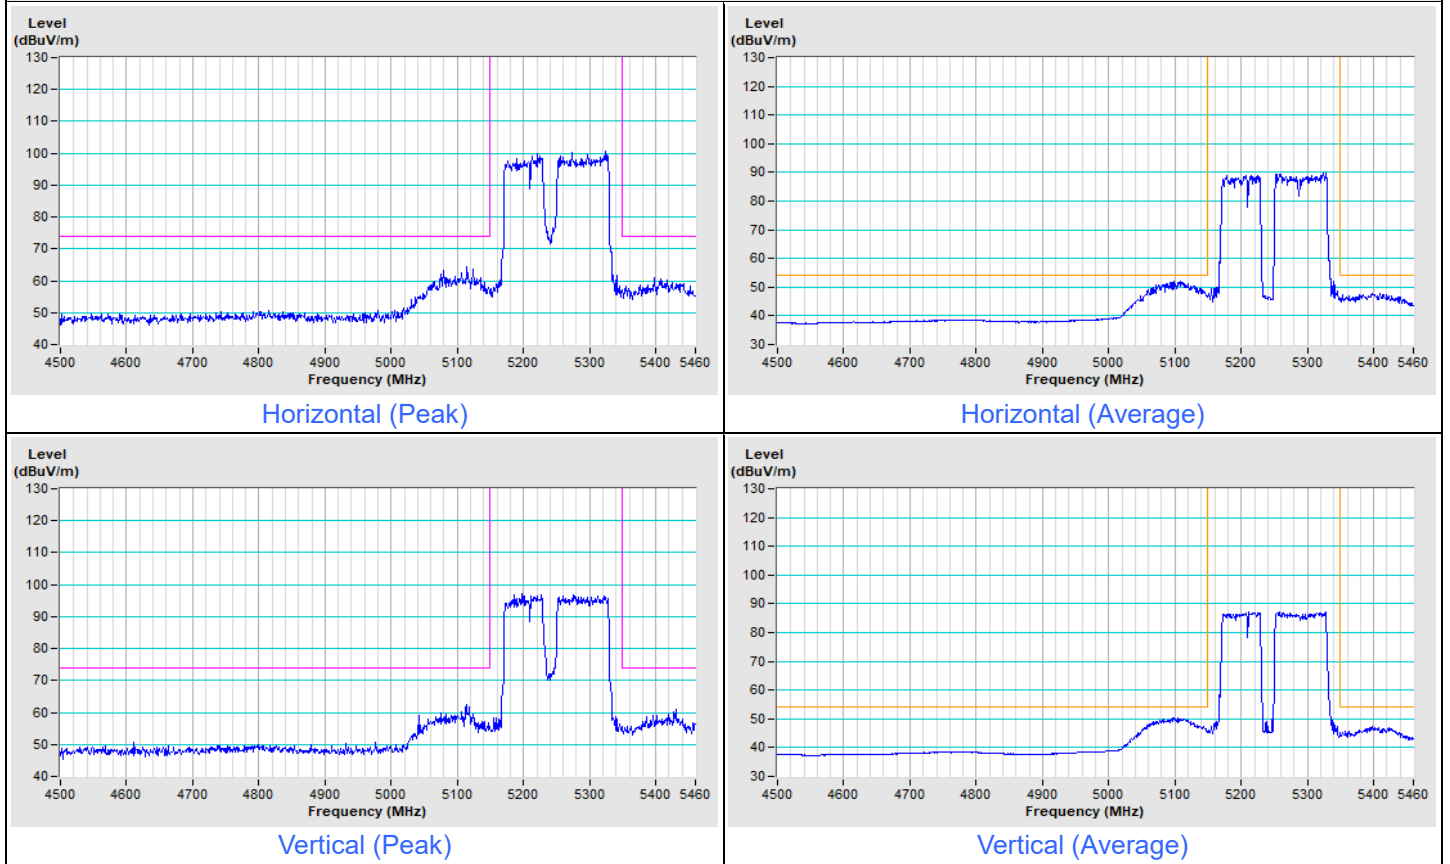

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 996+484+242-tone MRU Channel 114

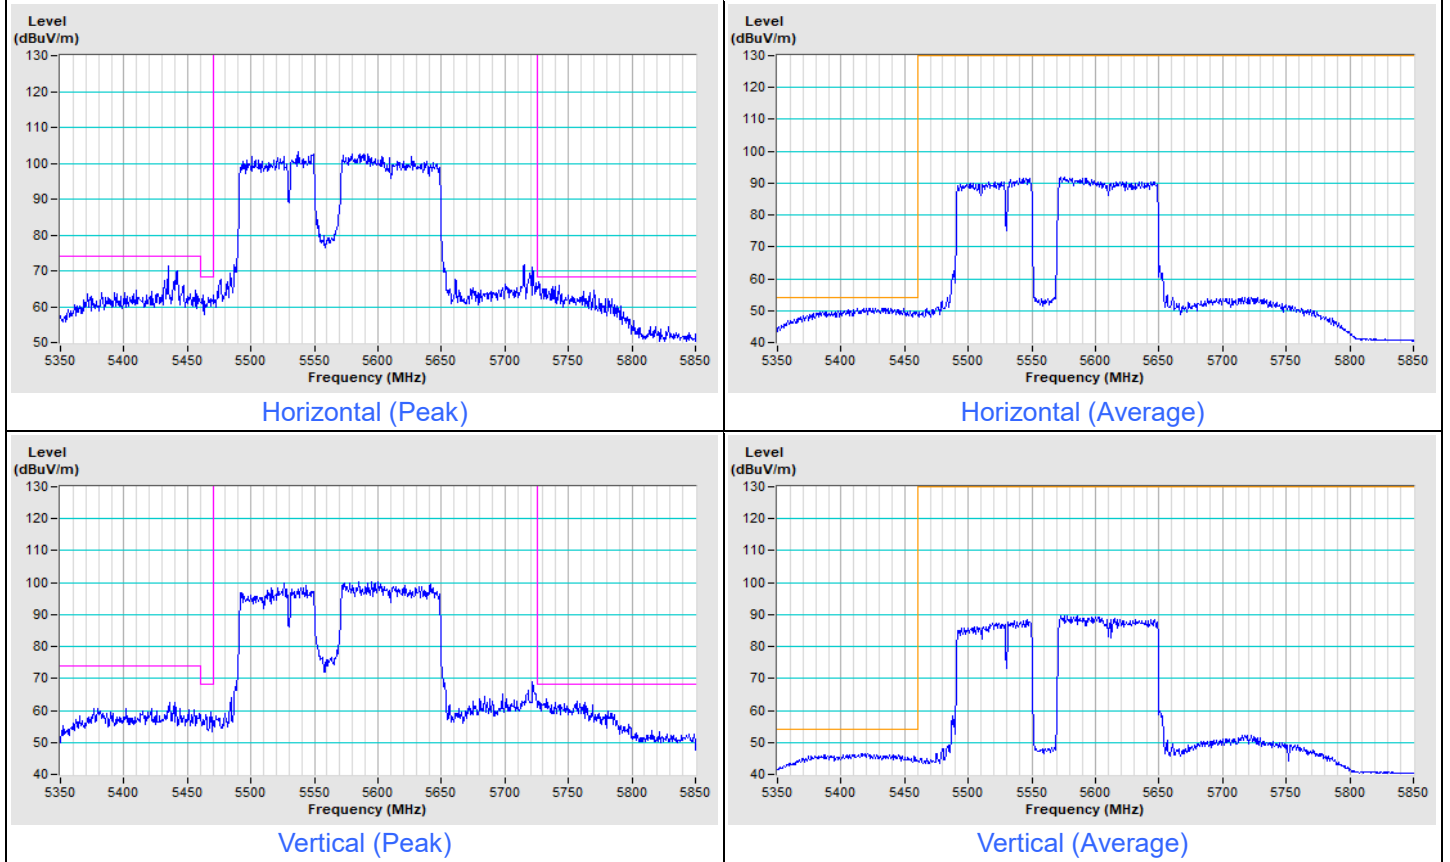

MODE B_CDD

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.4 PK	74.0	-20.6	1.12 H	73	47.4	6.0
2	5150.00	41.6 AV	54.0	-12.4	1.12 H	73	35.6	6.0
3	*5180.00	115.6 PK			1.12 H	73	109.7	5.9
4	*5180.00	104.7 AV			1.12 H	73	98.8	5.9
5	#10360.00	50.6 PK	68.2	-17.6	1.60 H	239	34.7	15.9
6	15540.00	57.3 PK	74.0	-16.7	1.98 H	253	40.4	16.9
7	15540.00	43.5 AV	54.0	-10.5	1.98 H	253	26.6	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.2 PK	74.0	-19.8	1.24 V	221	48.2	6.0
2	5150.00	45.0 AV	54.0	-9.0	1.24 V	221	39.0	6.0
3	*5180.00	118.8 PK			1.24 V	221	112.9	5.9
4	*5180.00	107.5 AV			1.24 V	221	101.6	5.9
5	#10360.00	51.5 PK	68.2	-16.7	1.77 V	163	35.6	15.9
6	15540.00	58.0 PK	74.0	-16.0	1.08 V	219	41.1	16.9
7	15540.00	43.1 AV	54.0	-10.9	1.08 V	219	26.2	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.9 PK			1.15 H	71	110.3	5.6
2	*5240.00	105.1 AV			1.15 H	71	99.5	5.6
3	5350.00	53.2 PK	74.0	-20.8	1.15 H	71	47.3	5.9
4	5350.00	41.4 AV	54.0	-12.6	1.15 H	71	35.5	5.9
5	#10480.00	50.9 PK	68.2	-17.3	1.63 H	243	34.9	16.0
6	15720.00	57.4 PK	74.0	-16.6	1.96 H	245	40.2	17.2
7	15720.00	43.6 AV	54.0	-10.4	1.96 H	245	26.4	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.0 PK			1.23 V	231	113.4	5.6
2	*5240.00	107.4 AV			1.23 V	231	101.8	5.6
3	5350.00	54.0 PK	74.0	-20.0	1.23 V	231	48.1	5.9
4	5350.00	44.6 AV	54.0	-9.4	1.23 V	231	38.7	5.9
5	#10480.00	50.5 PK	68.2	-17.7	1.66 V	148	34.5	16.0
6	15720.00	57.5 PK	74.0	-16.5	1.02 V	233	40.3	17.2
7	15720.00	43.0 AV	54.0	-11.0	1.02 V	233	25.8	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.9 PK	74.0	-21.1	1.06 H	69	46.9	6.0
2	5150.00	41.4 AV	54.0	-12.6	1.06 H	69	35.4	6.0
3	*5260.00	115.9 PK			1.06 H	69	110.4	5.5
4	*5260.00	105.1 AV			1.06 H	69	99.6	5.5
5	#10520.00	51.1 PK	68.2	-17.1	1.69 H	249	35.2	15.9
6	15780.00	58.0 PK	74.0	-16.0	2.00 H	231	40.9	17.1
7	15780.00	44.1 AV	54.0	-9.9	2.00 H	231	27.0	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.9 PK	74.0	-20.1	1.17 V	233	47.9	6.0
2	5150.00	44.5 AV	54.0	-9.5	1.17 V	233	38.5	6.0
3	*5260.00	118.4 PK			1.17 V	233	112.9	5.5
4	*5260.00	107.0 AV			1.17 V	233	101.5	5.5
5	#10520.00	51.3 PK	68.2	-16.9	1.76 V	177	35.4	15.9
6	15780.00	56.5 PK	74.0	-17.5	1.02 V	245	39.4	17.1
7	15780.00	42.4 AV	54.0	-11.6	1.02 V	245	25.3	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.8 PK			1.02 H	83	111.2	5.6
2	*5320.00	105.6 AV			1.02 H	83	100.0	5.6
3	5350.00	53.6 PK	74.0	-20.4	1.02 H	83	47.7	5.9
4	5350.00	42.9 AV	54.0	-11.1	1.02 H	83	37.0	5.9
5	10640.00	50.4 PK	74.0	-23.6	1.58 H	234	34.0	16.4
6	10640.00	39.0 AV	54.0	-15.0	1.58 H	234	22.6	16.4
7	15960.00	52.7 PK	74.0	-21.3	2.00 H	253	35.5	17.2
8	15960.00	40.5 AV	54.0	-13.5	2.00 H	253	23.3	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	119.7 PK			1.10 V	221	114.1	5.6
2	*5320.00	108.0 AV			1.10 V	221	102.4	5.6
3	5350.00	53.6 PK	74.0	-20.4	1.10 V	221	47.7	5.9
4	5350.00	43.3 AV	54.0	-10.7	1.10 V	221	37.4	5.9
5	10640.00	50.3 PK	74.0	-23.7	1.66 V	177	33.9	16.4
6	10640.00	38.5 AV	54.0	-15.5	1.66 V	177	22.1	16.4
7	15960.00	51.9 PK	74.0	-22.1	1.01 V	226	34.7	17.2
8	15960.00	39.4 AV	54.0	-14.6	1.01 V	226	22.2	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.1 PK	74.0	-20.9	1.02 H	88	47.1	6.0
2	5460.00	41.3 AV	54.0	-12.7	1.02 H	88	35.3	6.0
3	#5470.00	53.3 PK	68.2	-14.9	1.02 H	88	47.3	6.0
4	*5500.00	113.7 PK			1.02 H	88	107.7	6.0
5	*5500.00	102.7 AV			1.02 H	88	96.7	6.0
6	11000.00	50.9 PK	74.0	-23.1	1.59 H	239	34.0	16.9
7	11000.00	39.0 AV	54.0	-15.0	1.59 H	239	22.1	16.9
8	#16500.00	54.4 PK	68.2	-13.8	2.02 H	265	34.8	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.7 PK	74.0	-18.3	1.19 V	223	49.7	6.0
2	5460.00	45.3 AV	54.0	-8.7	1.19 V	223	39.3	6.0
3	#5470.00	54.9 PK	68.2	-13.3	1.19 V	223	48.9	6.0
4	*5500.00	117.5 PK			1.19 V	223	111.5	6.0
5	*5500.00	106.0 AV			1.19 V	223	100.0	6.0
6	11000.00	50.3 PK	74.0	-23.7	1.70 V	166	33.4	16.9
7	11000.00	38.6 AV	54.0	-15.4	1.70 V	166	21.7	16.9
8	#16500.00	54.2 PK	68.2	-14.0	1.03 V	233	34.6	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.3 PK			1.04 H	90	106.2	6.1
2	*5700.00	100.2 AV			1.04 H	90	94.1	6.1
3	#5725.00	52.8 PK	68.2	-15.4	1.04 H	90	46.6	6.2
4	11400.00	51.8 PK	74.0	-22.2	1.57 H	234	34.9	16.9
5	11400.00	39.8 AV	54.0	-14.2	1.57 H	234	22.9	16.9
6	#17100.00	54.7 PK	68.2	-13.5	1.89 H	262	34.5	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	115.0 PK			1.20 V	226	108.9	6.1
2	*5700.00	103.5 AV			1.20 V	226	97.4	6.1
3	#5725.00	53.5 PK	68.2	-14.7	1.20 V	226	47.3	6.2
4	11400.00	49.6 PK	74.0	-24.4	1.65 V	161	32.7	16.9
5	11400.00	37.9 AV	54.0	-16.1	1.65 V	161	21.0	16.9
6	#17100.00	53.9 PK	68.2	-14.3	1.10 V	211	33.7	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.0 PK	74.0	-22.0	1.05 H	101	46.0	6.0
2	5460.00	39.2 AV	54.0	-14.8	1.05 H	101	33.2	6.0
3	#5470.00	51.4 PK	68.2	-16.8	1.05 H	101	45.4	6.0
4	*5720.00	116.6 PK			1.05 H	101	110.4	6.2
5	*5720.00	105.3 AV			1.05 H	101	99.1	6.2
6	#5850.00	51.9 PK	68.2	-16.3	1.05 H	101	45.3	6.6
7	11440.00	49.5 PK	74.0	-24.5	1.58 H	328	32.6	16.9
8	11440.00	38.5 AV	54.0	-15.5	1.58 H	328	21.6	16.9
9	#17160.00	54.8 PK	68.2	-13.4	1.52 H	314	34.8	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.9 PK	74.0	-22.1	1.11 V	219	45.9	6.0
2	5460.00	38.9 AV	54.0	-15.1	1.11 V	219	32.9	6.0
3	#5470.00	51.7 PK	68.2	-16.5	1.11 V	219	45.7	6.0
4	*5720.00	120.0 PK			1.11 V	219	113.8	6.2
5	*5720.00	108.3 AV			1.11 V	219	102.1	6.2
6	#5850.00	52.3 PK	68.2	-15.9	1.11 V	219	45.7	6.6
7	11440.00	49.3 PK	74.0	-24.7	1.58 V	336	32.4	16.9
8	11440.00	38.1 AV	54.0	-15.9	1.58 V	336	21.2	16.9
9	#17160.00	54.2 PK	68.2	-14.0	1.53 V	329	34.2	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.71	52.4 PK	68.2	-15.8	1.25 H	70	46.4	6.0
2	*5745.00	123.0 PK			1.25 H	70	116.7	6.3
3	*5745.00	113.5 AV			1.25 H	70	107.2	6.3
4	#5958.18	53.4 PK	68.2	-14.8	1.25 H	70	46.7	6.7
5	11490.00	49.2 PK	74.0	-24.8	1.54 H	316	32.2	17.0
6	11490.00	37.9 AV	54.0	-16.1	1.54 H	316	20.9	17.0
7	#17235.00	54.2 PK	68.2	-14.0	1.47 H	317	33.7	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.70	52.8 PK	68.2	-15.4	3.39 V	220	46.7	6.1
2	*5745.00	119.7 PK			3.39 V	220	113.4	6.3
3	*5745.00	110.9 AV			3.39 V	220	104.6	6.3
4	#5956.80	52.7 PK	68.2	-15.5	3.39 V	220	46.0	6.7
5	11490.00	49.8 PK	74.0	-24.2	1.53 V	342	32.8	17.0
6	11490.00	38.9 AV	54.0	-15.1	1.53 V	342	21.9	17.0
7	#17235.00	54.0 PK	68.2	-14.2	1.45 V	314	33.5	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.64	53.2 PK	68.2	-15.0	1.19 H	63	47.2	6.0
2	*5825.00	121.6 PK			1.19 H	63	114.9	6.7
3	*5825.00	113.2 AV			1.19 H	63	106.5	6.7
4	#5932.61	54.0 PK	68.2	-14.2	1.19 H	63	47.2	6.8
5	11650.00	49.3 PK	74.0	-24.7	1.55 H	322	32.5	16.8
6	11650.00	38.3 AV	54.0	-15.7	1.55 H	322	21.5	16.8
7	#17475.00	55.1 PK	68.2	-13.1	1.49 H	302	32.3	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5607.00	51.7 PK	68.2	-16.5	3.10 V	214	45.6	6.1
2	*5825.00	118.3 PK			3.10 V	214	111.6	6.7
3	*5825.00	110.4 AV			3.10 V	214	103.7	6.7
4	#5828.10	52.8 PK	68.2	-15.4	3.10 V	214	46.2	6.6
5	11650.00	49.0 PK	74.0	-25.0	1.55 V	347	32.2	16.8
6	11650.00	38.0 AV	54.0	-16.0	1.55 V	347	21.2	16.8
7	#17475.00	53.8 PK	68.2	-14.4	1.50 V	314	31.0	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.0 PK	74.0	-14.0	1.13 H	74	54.0	6.0
2	5150.00	44.5 AV	54.0	-9.5	1.13 H	74	38.5	6.0
3	*5180.00	113.6 PK			1.13 H	74	107.7	5.9
4	*5180.00	104.7 AV			1.13 H	74	98.8	5.9
5	#10360.00	51.2 PK	68.2	-17.0	1.65 H	211	35.3	15.9
6	15540.00	61.7 PK	74.0	-12.3	1.95 H	222	44.8	16.9
7	15540.00	46.7 AV	54.0	-7.3	1.95 H	222	29.8	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.6 PK	74.0	-13.4	1.26 V	222	54.6	6.0
2	5150.00	45.2 AV	54.0	-8.8	1.26 V	222	39.2	6.0
3	*5180.00	116.2 PK			1.26 V	222	110.3	5.9
4	*5180.00	107.0 AV			1.26 V	222	101.1	5.9
5	#10360.00	50.5 PK	68.2	-17.7	1.76 V	177	34.6	15.9
6	15540.00	59.4 PK	74.0	-14.6	1.12 V	220	42.5	16.9
7	15540.00	44.5 AV	54.0	-9.5	1.12 V	220	27.6	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	114.1 PK			1.07 H	85	108.5	5.6
2	*5240.00	105.1 AV			1.07 H	85	99.5	5.6
3	5350.00	61.0 PK	74.0	-13.0	1.07 H	85	55.1	5.9
4	5350.00	43.7 AV	54.0	-10.3	1.07 H	85	37.8	5.9
5	#10480.00	51.4 PK	68.2	-16.8	1.66 H	214	35.4	16.0
6	15720.00	61.8 PK	74.0	-12.2	1.97 H	230	44.6	17.2
7	15720.00	46.8 AV	54.0	-7.2	1.97 H	230	29.6	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	116.4 PK			1.26 V	213	110.8	5.6
2	*5240.00	107.2 AV			1.26 V	213	101.6	5.6
3	5350.00	59.8 PK	74.0	-14.2	1.26 V	213	53.9	5.9
4	5350.00	44.8 AV	54.0	-9.2	1.26 V	213	38.9	5.9
5	#10480.00	50.7 PK	68.2	-17.5	1.74 V	184	34.7	16.0
6	15720.00	59.0 PK	74.0	-15.0	1.18 V	210	41.8	17.2
7	15720.00	44.3 AV	54.0	-9.7	1.18 V	210	27.1	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.5 PK	74.0	-13.5	1.10 H	87	54.5	6.0
2	5150.00	43.2 AV	54.0	-10.8	1.10 H	87	37.2	6.0
3	*5260.00	114.2 PK			1.10 H	87	108.7	5.5
4	*5260.00	105.1 AV			1.10 H	87	99.6	5.5
5	#10520.00	50.6 PK	68.2	-17.6	1.68 H	208	34.7	15.9
6	15780.00	61.7 PK	74.0	-12.3	1.90 H	219	44.6	17.1
7	15780.00	46.4 AV	54.0	-7.6	1.90 H	219	29.3	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.5 PK	74.0	-14.5	1.27 V	215	53.5	6.0
2	5150.00	44.5 AV	54.0	-9.5	1.27 V	215	38.5	6.0
3	*5260.00	116.9 PK			1.27 V	215	111.4	5.5
4	*5260.00	107.5 AV			1.27 V	215	102.0	5.5
5	#10520.00	51.0 PK	68.2	-17.2	1.68 V	145	35.1	15.9
6	15780.00	59.1 PK	74.0	-14.9	1.09 V	253	42.0	17.1
7	15780.00	44.4 AV	54.0	-9.6	1.09 V	253	27.3	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.2 PK			1.03 H	85	110.6	5.6
2	*5320.00	105.5 AV			1.03 H	85	99.9	5.6
3	5350.00	61.1 PK	74.0	-12.9	1.03 H	85	55.2	5.9
4	5350.00	43.6 AV	54.0	-10.4	1.03 H	85	37.7	5.9
5	10640.00	49.9 PK	74.0	-24.1	1.63 H	225	33.5	16.4
6	10640.00	38.4 AV	54.0	-15.6	1.63 H	225	22.0	16.4
7	15960.00	52.2 PK	74.0	-21.8	1.94 H	247	35.0	17.2
8	15960.00	40.2 AV	54.0	-13.8	1.94 H	247	23.0	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.7 PK			1.08 V	220	113.1	5.6
2	*5320.00	107.5 AV			1.08 V	220	101.9	5.6
3	5350.00	58.5 PK	74.0	-15.5	1.08 V	220	52.6	5.9
4	5350.00	45.2 AV	54.0	-8.8	1.08 V	220	39.3	5.9
5	10640.00	50.2 PK	74.0	-23.8	1.68 V	169	33.8	16.4
6	10640.00	38.4 AV	54.0	-15.6	1.68 V	169	22.0	16.4
7	15960.00	51.8 PK	74.0	-22.2	1.06 V	224	34.6	17.2
8	15960.00	39.5 AV	54.0	-14.5	1.06 V	224	22.3	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.8 PK	74.0	-21.2	1.07 H	90	46.8	6.0
2	5460.00	42.3 AV	54.0	-11.7	1.07 H	90	36.3	6.0
3	#5470.00	57.9 PK	68.2	-10.3	1.07 H	90	51.9	6.0
4	*5500.00	113.9 PK			1.07 H	90	107.9	6.0
5	*5500.00	102.5 AV			1.07 H	90	96.5	6.0
6	11000.00	51.1 PK	74.0	-22.9	1.62 H	243	34.2	16.9
7	11000.00	39.3 AV	54.0	-14.7	1.62 H	243	22.4	16.9
8	#16500.00	54.6 PK	68.2	-13.6	1.96 H	257	35.0	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.9 PK	74.0	-17.1	1.23 V	221	50.9	6.0
2	5460.00	44.8 AV	54.0	-9.2	1.23 V	221	38.8	6.0
3	#5470.00	54.9 PK	68.2	-13.3	1.23 V	221	48.9	6.0
4	*5500.00	118.0 PK			1.23 V	221	112.0	6.0
5	*5500.00	106.0 AV			1.23 V	221	100.0	6.0
6	11000.00	50.6 PK	74.0	-23.4	1.67 V	157	33.7	16.9
7	11000.00	38.8 AV	54.0	-15.2	1.67 V	157	21.9	16.9
8	#16500.00	54.4 PK	68.2	-13.8	1.06 V	243	34.8	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.8 PK			1.10 H	89	106.7	6.1
2	*5700.00	100.5 AV			1.10 H	89	94.4	6.1
3	#5725.00	53.1 PK	68.2	-15.1	1.10 H	89	46.9	6.2
4	11400.00	51.4 PK	74.0	-22.6	1.58 H	238	34.5	16.9
5	11400.00	39.7 AV	54.0	-14.3	1.58 H	238	22.8	16.9
6	#17100.00	54.9 PK	68.2	-13.3	1.93 H	268	34.7	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	115.7 PK			1.21 V	218	109.6	6.1
2	*5700.00	103.8 AV			1.21 V	218	97.7	6.1
3	#5725.00	54.0 PK	68.2	-14.2	1.21 V	218	47.8	6.2
4	11400.00	49.5 PK	74.0	-24.5	1.66 V	170	32.6	16.9
5	11400.00	37.9 AV	54.0	-16.1	1.66 V	170	21.0	16.9
6	#17100.00	54.3 PK	68.2	-13.9	1.06 V	205	34.1	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.6 PK	74.0	-22.4	1.08 H	77	45.6	6.0
2	5460.00	38.7 AV	54.0	-15.3	1.08 H	77	32.7	6.0
3	#5470.00	51.2 PK	68.2	-17.0	1.08 H	77	45.2	6.0
4	*5720.00	115.5 PK			1.08 H	77	109.3	6.2
5	*5720.00	105.7 AV			1.08 H	77	99.5	6.2
6	#5850.00	51.8 PK	68.2	-16.4	1.08 H	77	45.2	6.6
7	11440.00	48.8 PK	74.0	-25.2	1.55 H	318	31.9	16.9
8	11440.00	38.0 AV	54.0	-16.0	1.55 H	318	21.1	16.9
9	#17160.00	55.0 PK	68.2	-13.2	1.50 H	324	35.0	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.2 PK	74.0	-21.8	1.25 V	222	46.2	6.0
2	5460.00	39.2 AV	54.0	-14.8	1.25 V	222	33.2	6.0
3	#5470.00	51.6 PK	68.2	-16.6	1.25 V	222	45.6	6.0
4	*5720.00	118.3 PK			1.25 V	222	112.1	6.2
5	*5720.00	106.3 AV			1.25 V	222	100.1	6.2
6	#5850.00	52.4 PK	68.2	-15.8	1.25 V	222	45.8	6.6
7	11440.00	48.5 PK	74.0	-25.5	1.63 V	339	31.6	16.9
8	11440.00	38.0 AV	54.0	-16.0	1.63 V	339	21.1	16.9
9	#17160.00	54.0 PK	68.2	-14.2	1.55 V	320	34.0	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5618.71	53.4 PK	68.2	-14.8	1.01 H	65	47.3	6.1
2	*5745.00	122.3 PK			1.01 H	65	116.0	6.3
3	*5745.00	112.6 AV			1.01 H	65	106.3	6.3
4	#5958.08	52.7 PK	68.2	-15.5	1.01 H	65	46.0	6.7
5	11490.00	49.4 PK	74.0	-24.6	1.57 H	338	32.4	17.0
6	11490.00	38.2 AV	54.0	-15.8	1.57 H	338	21.2	17.0
7	#17235.00	54.2 PK	68.2	-14.0	1.50 H	300	33.7	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.64	54.8 PK	68.2	-13.4	3.18 V	218	48.7	6.1
2	*5745.00	120.0 PK			3.18 V	218	113.7	6.3
3	*5745.00	109.4 AV			3.18 V	218	103.1	6.3
4	#5933.55	52.2 PK	68.2	-16.0	3.18 V	218	45.4	6.8
5	11490.00	49.2 PK	74.0	-24.8	1.58 V	345	32.2	17.0
6	11490.00	38.2 AV	54.0	-15.8	1.58 V	345	21.2	17.0
7	#17235.00	53.3 PK	68.2	-14.9	1.49 V	306	32.8	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5621.40	53.1 PK	68.2	-15.1	1.02 H	56	47.0	6.1
2	*5825.00	121.6 PK			1.02 H	56	114.9	6.7
3	*5825.00	111.9 AV			1.02 H	56	105.2	6.7
4	#5925.64	53.6 PK	68.2	-14.6	1.02 H	56	46.8	6.8
5	11650.00	49.6 PK	74.0	-24.4	1.55 H	327	32.8	16.8
6	11650.00	38.1 AV	54.0	-15.9	1.55 H	327	21.3	16.8
7	#17475.00	55.0 PK	68.2	-13.2	1.46 H	319	32.2	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5628.21	52.6 PK	68.2	-15.6	3.07 V	216	46.5	6.1
2	*5825.00	118.8 PK			3.07 V	216	112.1	6.7
3	*5825.00	108.7 AV			3.07 V	216	102.0	6.7
4	#5942.03	51.5 PK	68.2	-16.7	3.07 V	216	44.8	6.7
5	11650.00	49.4 PK	74.0	-24.6	1.57 V	336	32.6	16.8
6	11650.00	38.2 AV	54.0	-15.8	1.57 V	336	21.4	16.8
7	#17475.00	53.9 PK	68.2	-14.3	1.48 V	320	31.1	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5123.00	60.1 PK	74.0	-13.9	1.06 H	5	54.0	6.1
2	5123.00	47.0 AV	54.0	-7.0	1.06 H	5	40.9	6.1
3	*5210.00	106.2 PK			1.06 H	5	100.5	5.7
4	*5210.00	94.5 AV			1.06 H	5	88.8	5.7
5	5350.00	53.6 PK	74.0	-20.4	1.06 H	5	47.7	5.9
6	5350.00	40.3 AV	54.0	-13.7	1.06 H	5	34.4	5.9
7	#10420.00	50.3 PK	68.2	-17.9	1.69 H	209	34.2	16.1
8	15630.00	59.7 PK	74.0	-14.3	2.01 H	204	42.7	17.0
9	15630.00	46.9 AV	54.0	-7.1	2.01 H	204	29.9	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.4 PK	74.0	-5.6	1.01 V	223	62.4	6.0
2	5150.00	52.4 AV	54.0	-1.6	1.01 V	223	46.4	6.0
3	*5210.00	110.5 PK			1.01 V	223	104.8	5.7
4	*5210.00	99.3 AV			1.01 V	223	93.6	5.7
5	5350.00	59.2 PK	74.0	-14.8	1.01 V	223	53.3	5.9
6	5350.00	41.6 AV	54.0	-12.4	1.01 V	223	35.7	5.9
7	#10420.00	48.3 PK	68.2	-19.9	1.68 V	160	32.2	16.1
8	15630.00	57.7 PK	74.0	-16.3	1.00 V	207	40.7	17.0
9	15630.00	43.5 AV	54.0	-10.5	1.00 V	207	26.5	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.0 PK	74.0	-22.0	1.02 H	84	46.0	6.0
2	5150.00	40.7 AV	54.0	-13.3	1.02 H	84	34.7	6.0
3	*5290.00	107.2 PK			1.02 H	84	101.8	5.4
4	*5290.00	96.4 AV			1.02 H	84	91.0	5.4
5	5350.00	66.9 PK	74.0	-7.1	1.02 H	84	61.0	5.9
6	5350.00	50.8 AV	54.0	-3.2	1.02 H	84	44.9	5.9
7	#10580.00	50.2 PK	68.2	-18.0	1.63 H	202	33.9	16.3
8	15870.00	59.7 PK	74.0	-14.3	2.00 H	194	42.4	17.3
9	15870.00	46.7 AV	54.0	-7.3	2.00 H	194	29.4	17.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.6 PK	74.0	-21.4	1.03 V	222	46.6	6.0
2	5150.00	42.4 AV	54.0	-11.6	1.03 V	222	36.4	6.0
3	*5290.00	109.6 PK			1.03 V	222	104.2	5.4
4	*5290.00	99.5 AV			1.03 V	222	94.1	5.4
5	5350.00	68.0 PK	74.0	-6.0	1.03 V	222	62.1	5.9
6	5350.00	52.3 AV	54.0	-1.7	1.03 V	222	46.4	5.9
7	#10580.00	49.1 PK	68.2	-19.1	1.68 V	167	32.8	16.3
8	15870.00	57.0 PK	74.0	-17.0	1.09 V	213	39.7	17.3
9	15870.00	42.6 AV	54.0	-11.4	1.09 V	213	25.3	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.2 PK	74.0	-10.8	1.28 H	11	57.2	6.0
2	5460.00	47.8 AV	54.0	-6.2	1.28 H	11	41.8	6.0
3	#5470.00	63.0 PK	68.2	-5.2	1.28 H	11	57.0	6.0
4	*5530.00	103.5 PK			1.28 H	11	97.5	6.0
5	*5530.00	92.8 AV			1.28 H	11	86.8	6.0
6	#5725.00	53.3 PK	68.2	-14.9	1.28 H	11	47.1	6.2
7	11060.00	50.0 PK	74.0	-24.0	1.66 H	238	33.1	16.9
8	11060.00	38.7 AV	54.0	-15.3	1.66 H	238	21.8	16.9
9	#16590.00	53.3 PK	68.2	-14.9	1.88 H	250	32.9	20.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	68.4 PK	74.0	-5.6	1.08 V	218	62.4	6.0
2	5460.00	50.8 AV	54.0	-3.2	1.08 V	218	44.8	6.0
3	#5470.00	66.5 PK	68.2	-1.7	1.08 V	218	60.5	6.0
4	*5530.00	109.5 PK			1.08 V	218	103.5	6.0
5	*5530.00	97.6 AV			1.08 V	218	91.6	6.0
6	#5725.00	52.2 PK	68.2	-16.0	1.08 V	218	46.0	6.2
7	11060.00	49.1 PK	74.0	-24.9	1.59 V	170	32.2	16.9
8	11060.00	37.7 AV	54.0	-16.3	1.59 V	170	20.8	16.9
9	#16590.00	54.1 PK	68.2	-14.1	1.03 V	226	33.7	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	107.5 PK			1.09 H	76	101.6	5.9
2	*5610.00	96.2 AV			1.09 H	76	90.3	5.9
3	#5725.00	63.6 PK	68.2	-4.6	1.09 H	76	57.4	6.2
4	11220.00	49.7 PK	74.0	-24.3	1.69 H	231	33.0	16.7
5	11220.00	38.4 AV	54.0	-15.6	1.69 H	231	21.7	16.7
6	#16830.00	53.2 PK	68.2	-15.0	1.83 H	240	32.0	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	111.9 PK			1.03 V	218	106.0	5.9
2	*5610.00	100.3 AV			1.03 V	218	94.4	5.9
3	#5725.00	66.4 PK	68.2	-1.8	1.03 V	218	60.2	6.2
4	11220.00	49.6 PK	74.0	-24.4	1.71 V	146	32.9	16.7
5	11220.00	37.8 AV	54.0	-16.2	1.71 V	146	21.1	16.7
6	#16830.00	53.7 PK	68.2	-14.5	1.03 V	212	32.5	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.2 PK	74.0	-18.8	1.31 H	76	49.2	6.0
2	5460.00	41.0 AV	54.0	-13.0	1.31 H	76	35.0	6.0
3	#5470.00	56.0 PK	68.2	-12.2	1.31 H	76	50.0	6.0
4	*5690.00	108.3 PK			1.31 H	76	102.2	6.1
5	*5690.00	97.6 AV			1.31 H	76	91.5	6.1
6	#5850.00	63.4 PK	68.2	-4.8	1.31 H	76	56.8	6.6
7	11380.00	49.2 PK	74.0	-24.8	1.50 H	331	32.2	17.0
8	11380.00	38.3 AV	54.0	-15.7	1.50 H	331	21.3	17.0
9	#17070.00	55.2 PK	68.2	-13.0	1.56 H	333	34.8	20.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	1.05 V	220	52.3	6.0
2	5460.00	44.2 AV	54.0	-9.8	1.05 V	220	38.2	6.0
3	#5470.00	62.2 PK	68.2	-6.0	1.05 V	220	56.2	6.0
4	*5690.00	110.9 PK			1.05 V	220	104.8	6.1
5	*5690.00	101.4 AV			1.05 V	220	95.3	6.1
6	#5850.00	66.7 PK	68.2	-1.5	1.05 V	220	60.1	6.6
7	11380.00	49.0 PK	74.0	-25.0	1.60 V	348	32.0	17.0
8	11380.00	37.8 AV	54.0	-16.2	1.60 V	348	20.8	17.0
9	#17070.00	52.9 PK	68.2	-15.3	1.40 V	309	32.5	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.71	66.4 PK	68.2	-1.8	1.11 H	73	60.4	6.0
2	*5775.00	110.5 PK			1.11 H	73	104.0	6.5
3	*5775.00	99.1 AV			1.11 H	73	92.6	6.5
4	#5931.44	64.5 PK	68.2	-3.7	1.11 H	73	58.1	6.4
5	11550.00	48.8 PK	74.0	-25.2	1.44 H	320	31.8	17.0
6	11550.00	37.8 AV	54.0	-16.2	1.44 H	320	20.8	17.0
7	#17325.00	54.9 PK	68.2	-13.3	1.58 H	345	34.1	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.06	65.6 PK	68.2	-2.6	1.15 V	220	59.6	6.0
2	*5775.00	111.8 PK			1.15 V	220	105.3	6.5
3	*5775.00	100.9 AV			1.15 V	220	94.4	6.5
4	#5927.91	65.5 PK	68.2	-2.7	1.15 V	220	59.1	6.4
5	11550.00	48.8 PK	74.0	-25.2	1.54 V	308	31.8	17.0
6	11550.00	37.8 AV	54.0	-16.2	1.54 V	308	20.8	17.0
7	#17325.00	54.4 PK	68.2	-13.8	1.42 V	300	33.6	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.2 PK	74.0	-15.8	1.03 H	86	52.2	6.0
2	5150.00	46.9 AV	54.0	-7.1	1.03 H	86	40.9	6.0
3	*5250.00	102.6 PK			1.03 H	86	97.1	5.5
4	*5250.00	90.8 AV			1.03 H	86	85.3	5.5
5	5350.00	60.5 PK	74.0	-13.5	1.03 H	86	54.6	5.9
6	5350.00	48.2 AV	54.0	-5.8	1.03 H	86	42.3	5.9
7	#10500.00	49.0 PK	68.2	-19.2	1.67 H	221	33.1	15.9
8	15750.00	58.3 PK	74.0	-15.7	2.03 H	206	41.1	17.2
9	15750.00	45.1 AV	54.0	-8.9	2.03 H	206	27.9	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.0 PK	74.0	-11.0	1.01 V	219	57.0	6.0
2	5150.00	52.0 AV	54.0	-2.0	1.01 V	219	46.0	6.0
3	*5250.00	104.6 PK			1.01 V	219	99.1	5.5
4	*5250.00	94.1 AV			1.01 V	219	88.6	5.5
5	5350.00	65.6 PK	74.0	-8.4	1.01 V	219	59.7	5.9
6	5350.00	51.7 AV	54.0	-2.3	1.01 V	219	45.8	5.9
7	#10500.00	47.5 PK	68.2	-20.7	1.72 V	167	31.6	15.9
8	15750.00	55.9 PK	74.0	-18.1	1.02 V	207	38.7	17.2
9	15750.00	41.8 AV	54.0	-12.2	1.02 V	207	24.6	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.5 PK	74.0	-7.5	1.02 H	77	60.5	6.0
2	5460.00	47.7 AV	54.0	-6.3	1.02 H	77	41.7	6.0
3	#5470.00	59.3 PK	68.2	-8.9	1.02 H	77	53.3	6.0
4	*5570.00	98.9 PK			1.02 H	77	93.0	5.9
5	*5570.00	88.5 AV			1.02 H	77	82.6	5.9
6	#5725.00	63.6 PK	68.2	-4.6	1.02 H	77	57.4	6.2
7	11140.00	51.0 PK	74.0	-23.0	1.55 H	220	34.3	16.7
8	11140.00	38.9 AV	54.0	-15.1	1.55 H	220	22.2	16.7
9	#16710.00	54.3 PK	68.2	-13.9	2.03 H	267	32.8	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	71.8 PK	74.0	-2.2	1.06 V	219	65.8	6.0
2	5460.00	52.3 AV	54.0	-1.7	1.06 V	219	46.3	6.0
3	#5470.00	65.9 PK	68.2	-2.3	1.06 V	219	59.9	6.0
4	*5570.00	103.7 PK			1.06 V	219	97.8	5.9
5	*5570.00	92.6 AV			1.06 V	219	86.7	5.9
6	#5725.00	65.3 PK	68.2	-2.9	1.06 V	219	59.1	6.2
7	11140.00	48.9 PK	74.0	-25.1	1.79 V	153	32.2	16.7
8	11140.00	37.9 AV	54.0	-16.1	1.79 V	153	21.2	16.7
9	#16710.00	53.7 PK	68.2	-14.5	1.05 V	212	32.2	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	1.02 H	87	52.6	6.0
2	5150.00	45.3 AV	54.0	-8.7	1.02 H	87	39.3	6.0
3	*5250.00	101.2 PK			1.02 H	87	95.7	5.5
4	*5250.00	90.3 AV			1.02 H	87	84.8	5.5
5	5350.00	61.2 PK	74.0	-12.8	1.02 H	87	55.3	5.9
6	5350.00	48.6 AV	54.0	-5.4	1.02 H	87	42.7	5.9
7	#10500.00	49.0 PK	68.2	-19.2	1.65 H	245	33.1	15.9
8	15750.00	57.9 PK	74.0	-16.1	2.05 H	215	40.7	17.2
9	15750.00	45.1 AV	54.0	-8.9	2.05 H	215	27.9	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.0 PK	74.0	-11.0	1.02 V	223	57.0	6.0
2	5150.00	50.4 AV	54.0	-3.6	1.02 V	223	44.4	6.0
3	*5250.00	104.6 PK			1.02 V	223	99.1	5.5
4	*5250.00	93.6 AV			1.02 V	223	88.1	5.5
5	5350.00	67.8 PK	74.0	-6.2	1.02 V	223	61.9	5.9
6	5350.00	52.4 AV	54.0	-1.6	1.02 V	223	46.5	5.9
7	#10500.00	46.6 PK	68.2	-21.6	1.68 V	182	30.7	15.9
8	15750.00	56.3 PK	74.0	-17.7	1.06 V	231	39.1	17.2
9	15750.00	41.7 AV	54.0	-12.3	1.06 V	231	24.5	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.4 PK	74.0	-8.6	1.00 H	78	59.4	6.0
2	5460.00	47.0 AV	54.0	-7.0	1.00 H	78	41.0	6.0
3	#5470.00	58.3 PK	68.2	-9.9	1.00 H	78	52.3	6.0
4	*5570.00	100.2 PK			1.00 H	78	94.3	5.9
5	*5570.00	87.3 AV			1.00 H	78	81.4	5.9
6	#5725.00	60.9 PK	68.2	-7.3	1.00 H	78	54.7	6.2
7	11140.00	51.2 PK	74.0	-22.8	1.58 H	260	34.5	16.7
8	11140.00	39.4 AV	54.0	-14.6	1.58 H	260	22.7	16.7
9	#16710.00	54.3 PK	68.2	-13.9	1.97 H	242	32.8	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	68.5 PK	74.0	-5.5	1.10 V	224	62.5	6.0
2	5460.00	52.1 AV	54.0	-1.9	1.10 V	224	46.1	6.0
3	#5470.00	65.7 PK	68.2	-2.5	1.10 V	224	59.7	6.0
4	*5570.00	103.6 PK			1.10 V	224	97.7	5.9
5	*5570.00	91.9 AV			1.10 V	224	86.0	5.9
6	#5725.00	62.5 PK	68.2	-5.7	1.10 V	224	56.3	6.2
7	11140.00	49.4 PK	74.0	-24.6	1.73 V	174	32.7	16.7
8	11140.00	38.0 AV	54.0	-16.0	1.73 V	174	21.3	16.7
9	#16710.00	53.7 PK	68.2	-14.5	1.02 V	210	32.2	21.5


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


MODE B_CDD Plot of Band Edge

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 52+26-tone MRU Channel 36

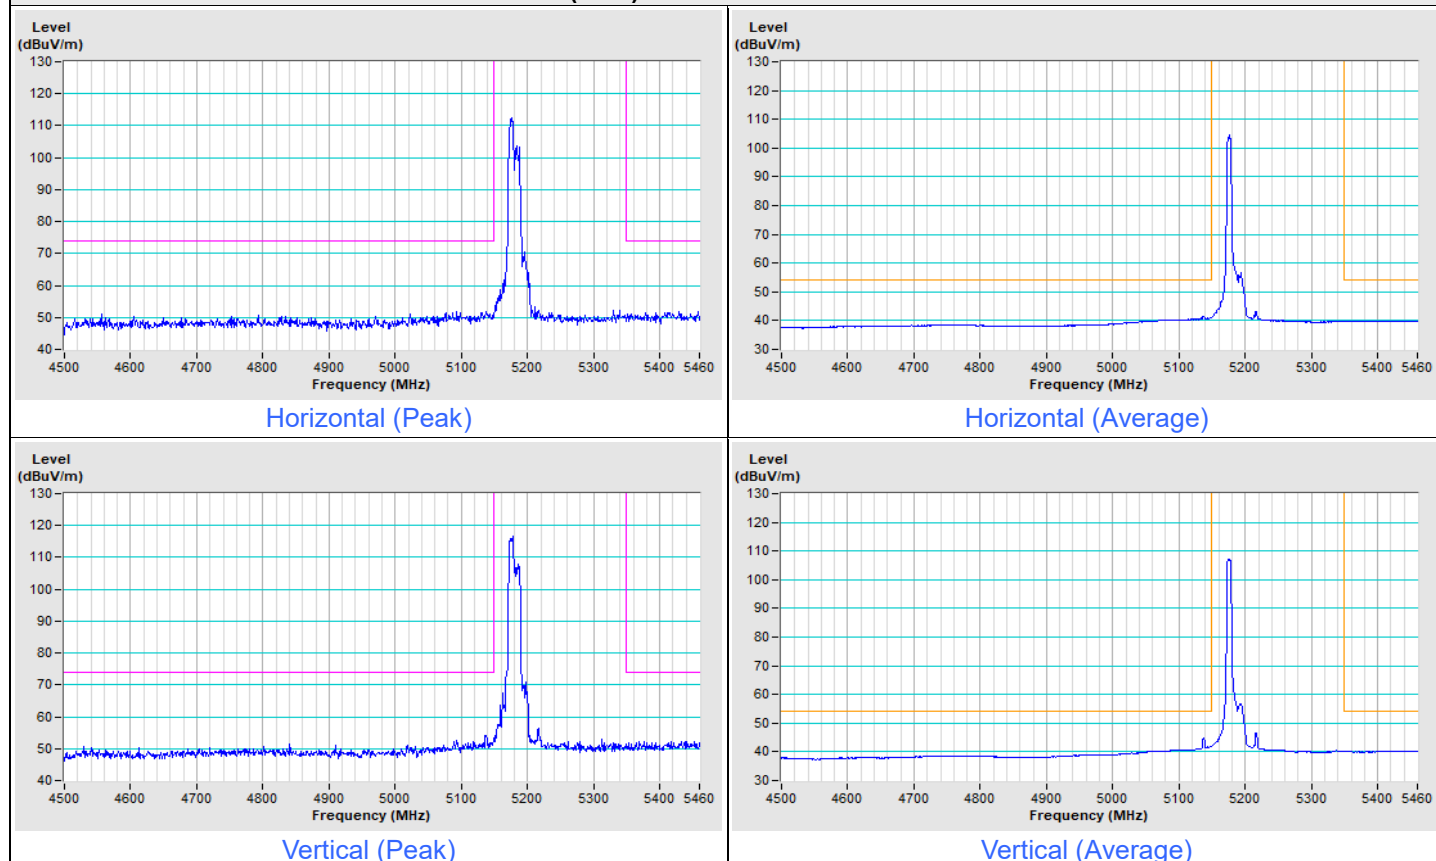


802.11be (EHT) 52+26-tone MRU Channel 64

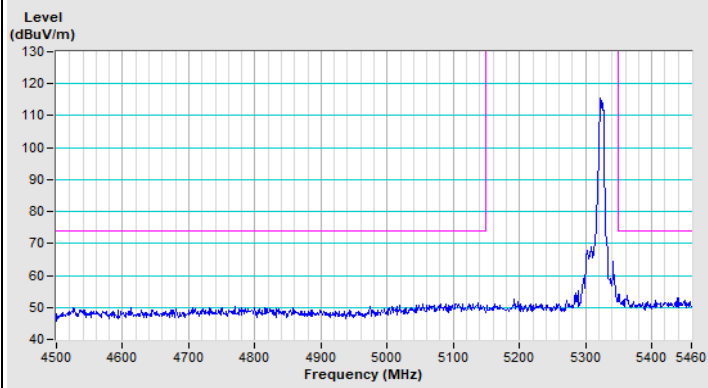


Horizontal (Peak)

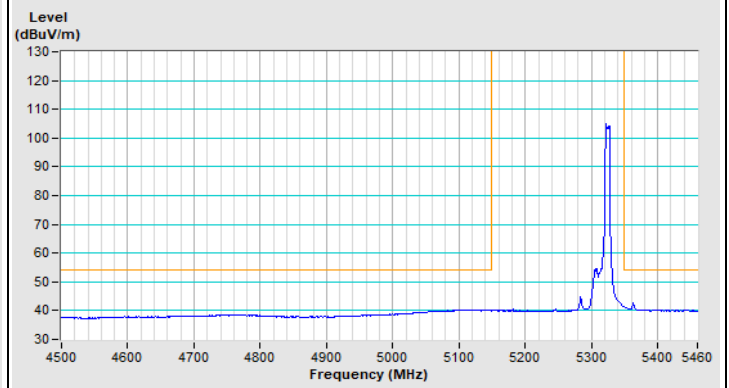

Horizontal (Average)

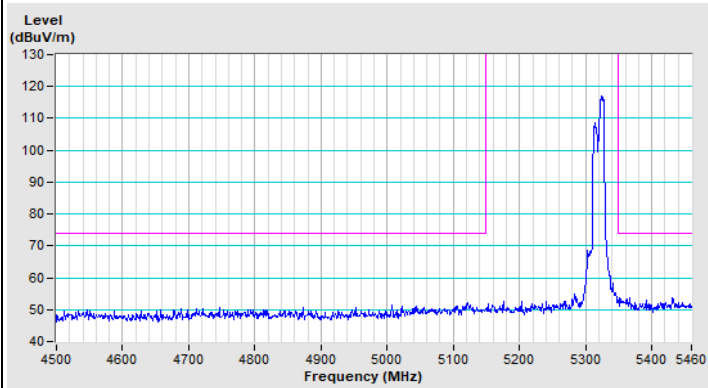


Vertical (Peak)

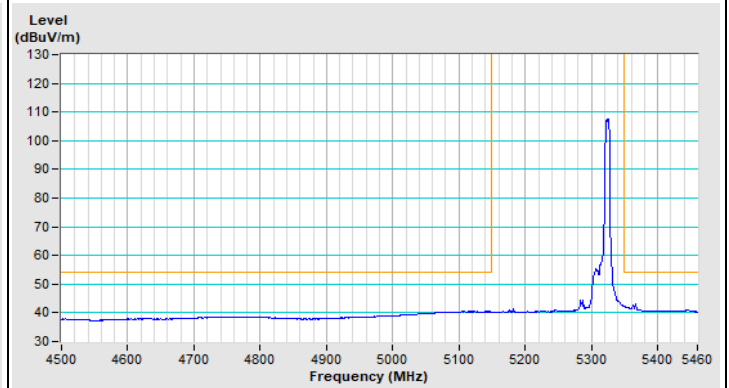

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 52+26-tone MRU Channel 100

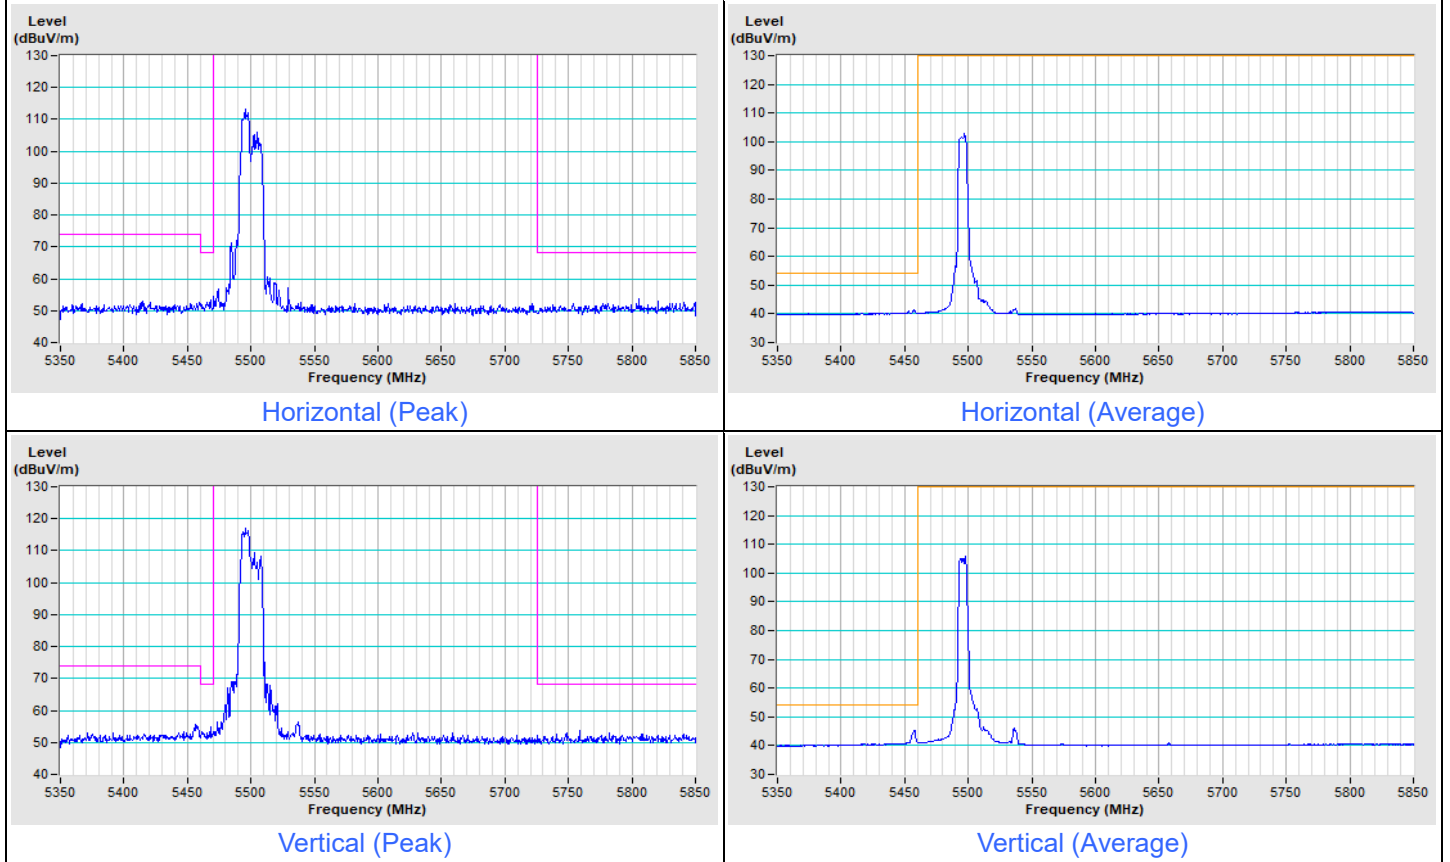


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 52+26-tone MRU Channel 149

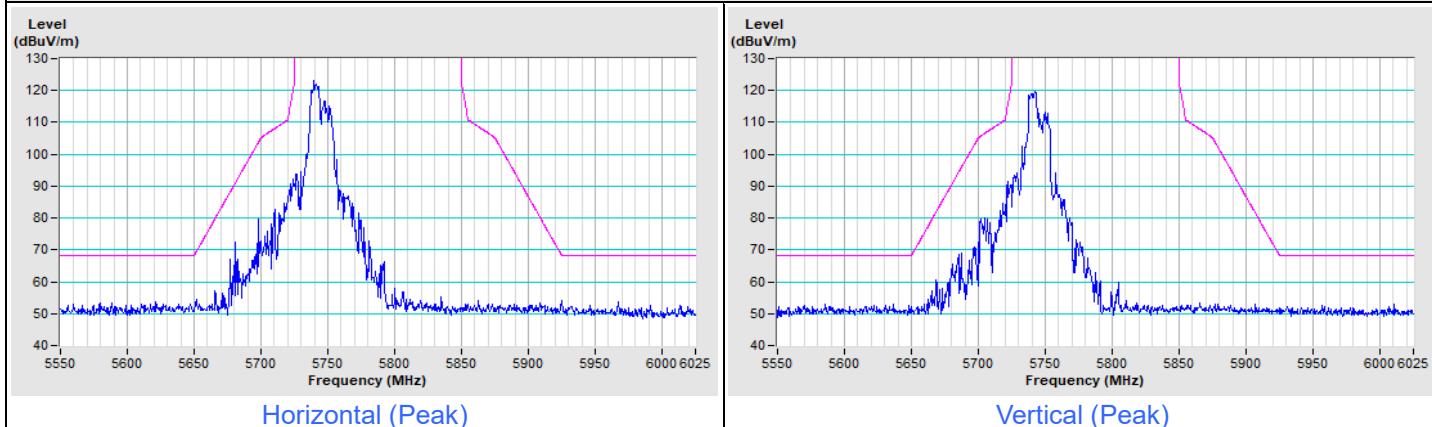


802.11be (EHT) 52+26-tone MRU Channel 165

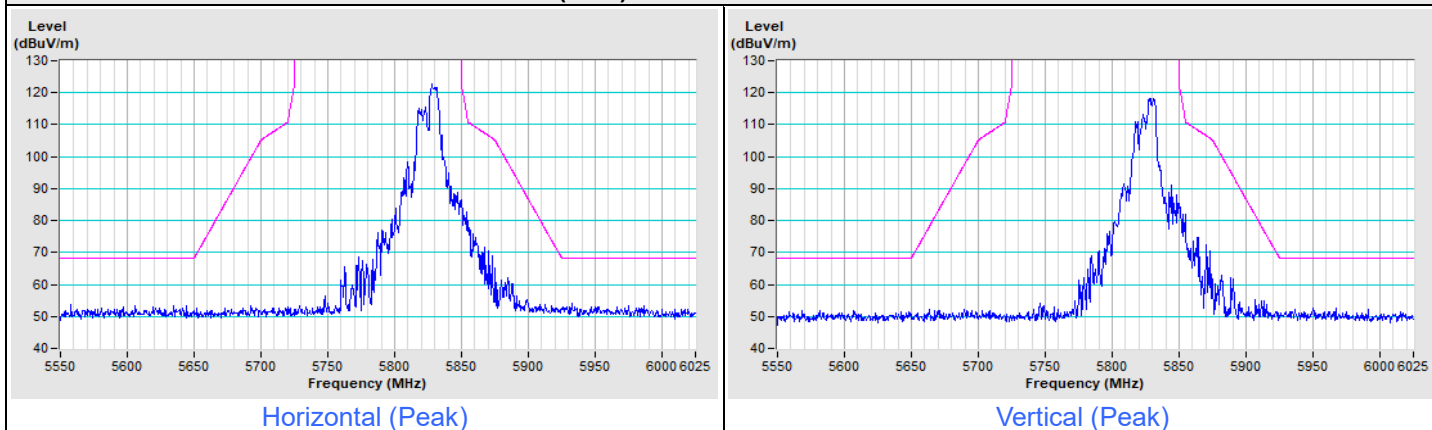


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 106+26-tone MRU Channel 36

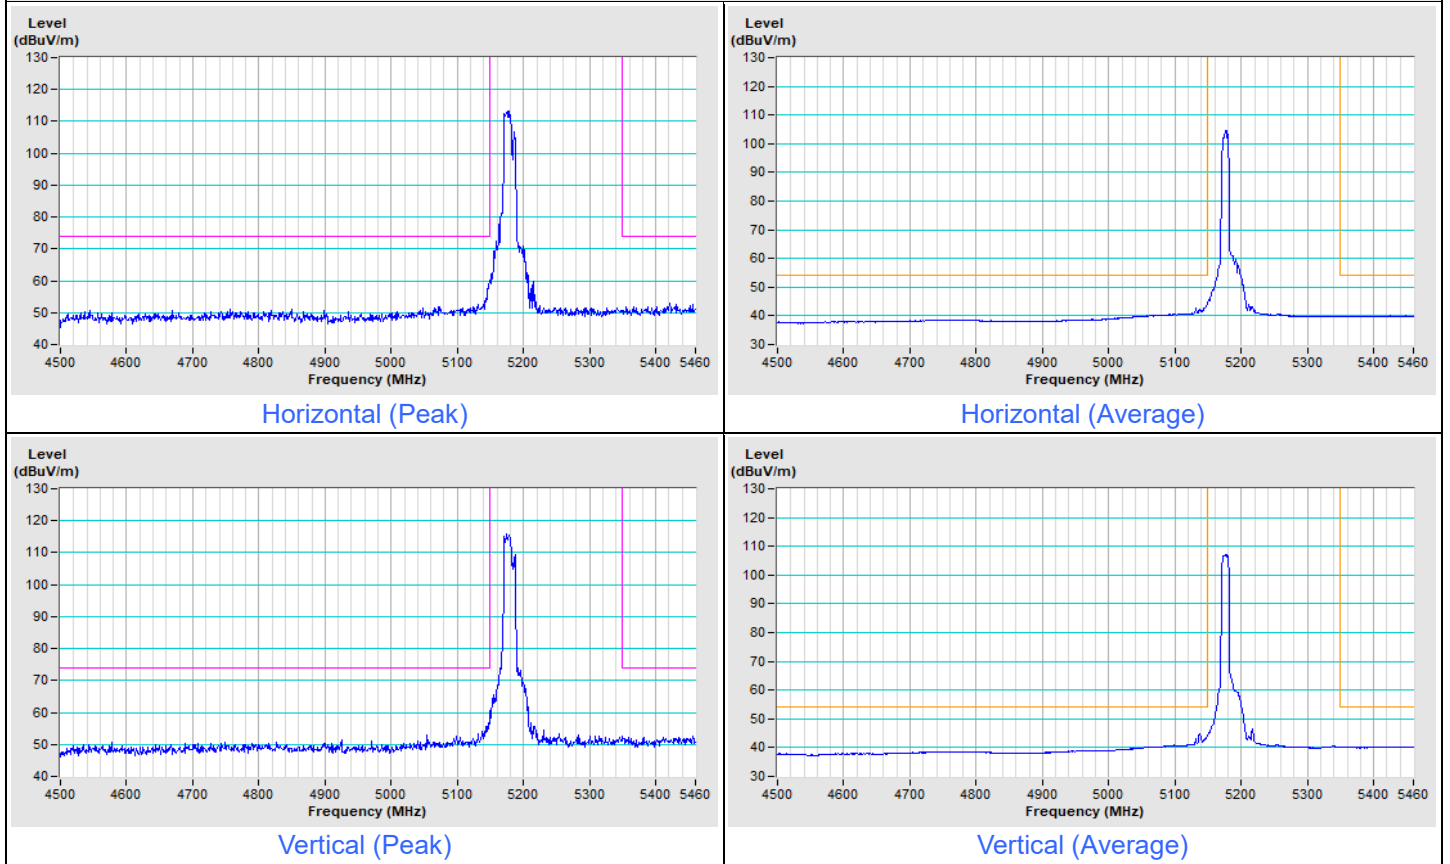


802.11be (EHT) 106+26-tone MRU Channel 64

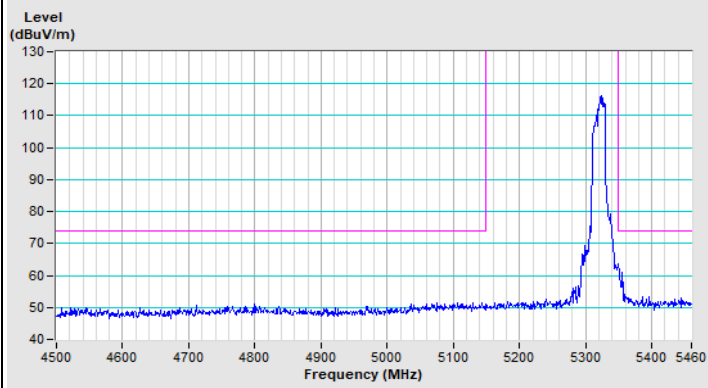


Horizontal (Peak)

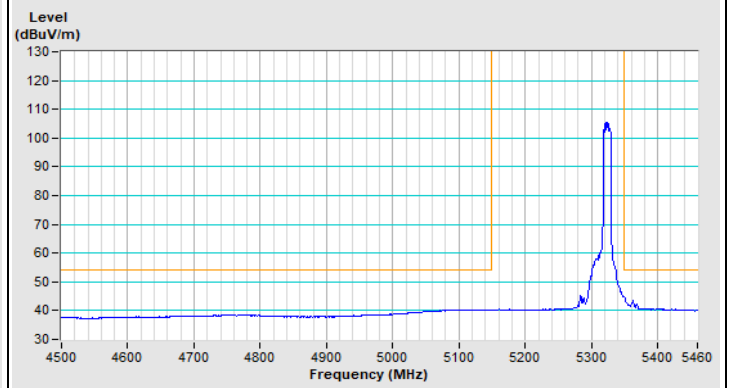

Horizontal (Average)

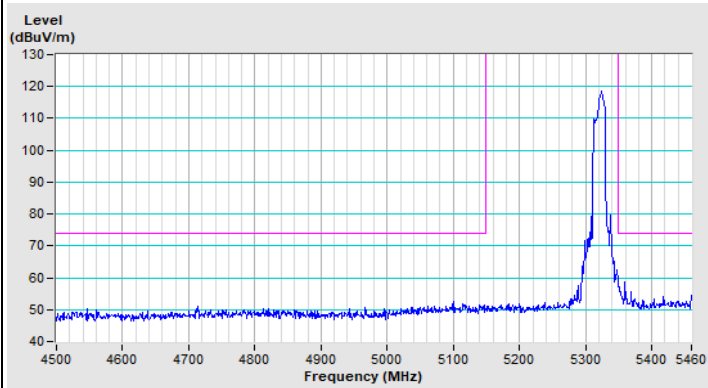


Vertical (Peak)

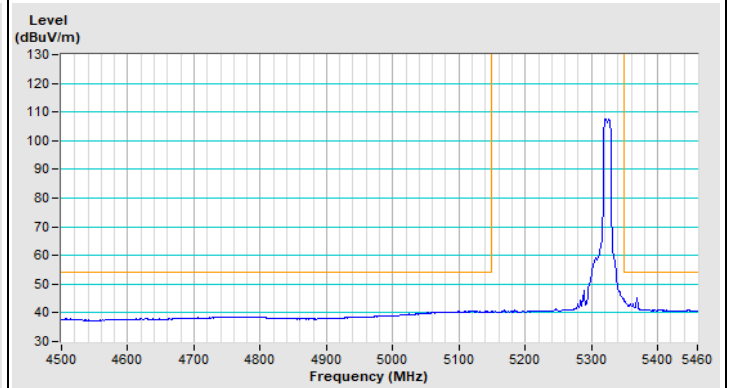

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 106+26-tone MRU Channel 100

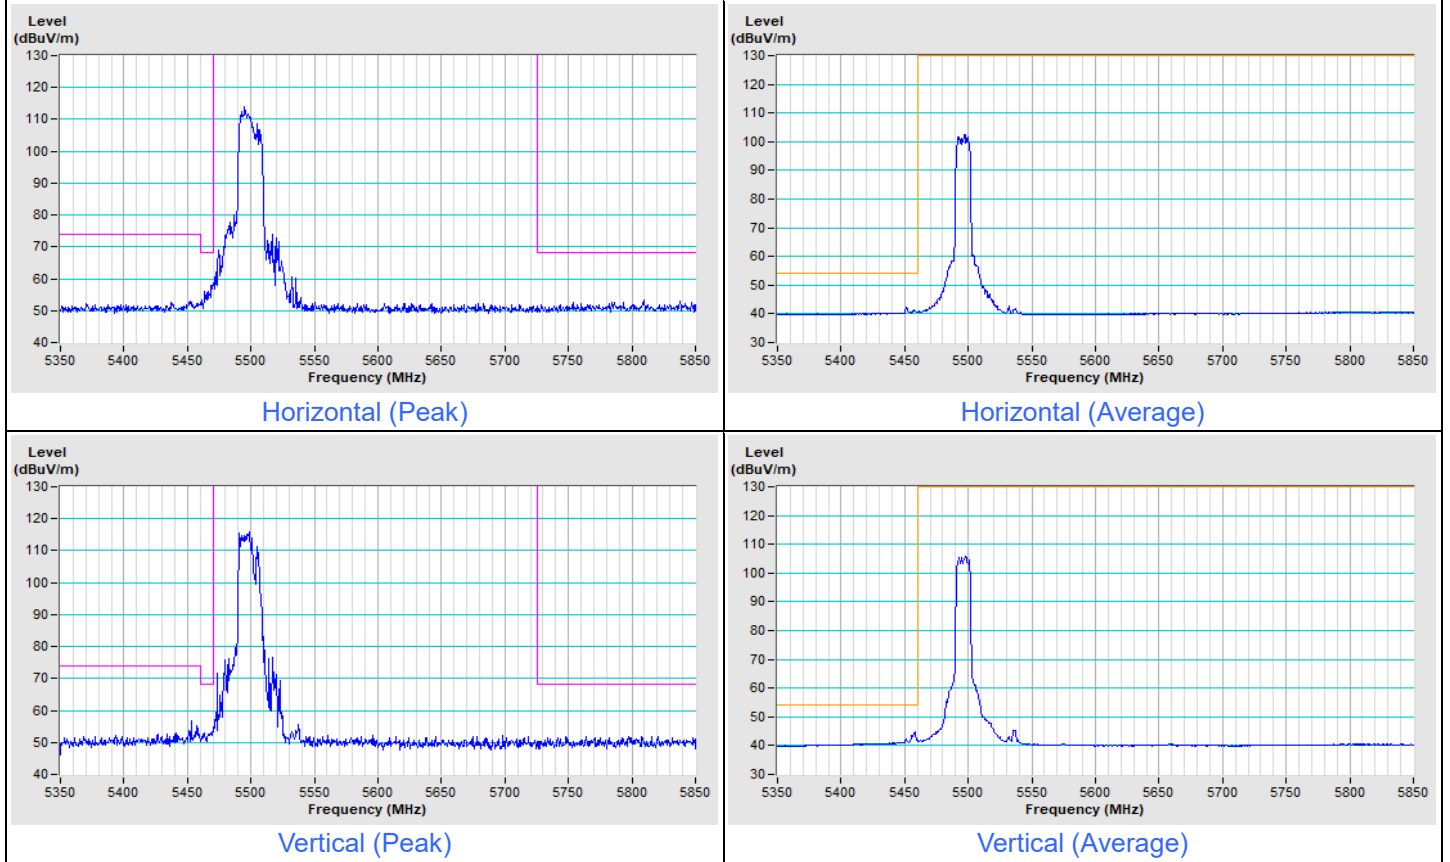


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 106+26-tone MRU Channel 149

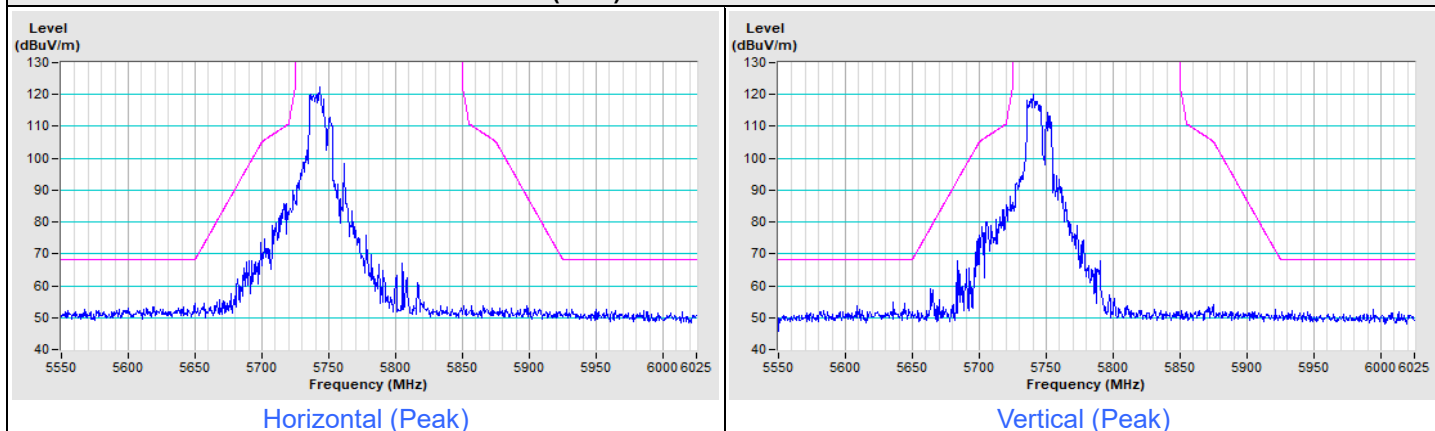


802.11be (EHT) 106+26-tone MRU Channel 165

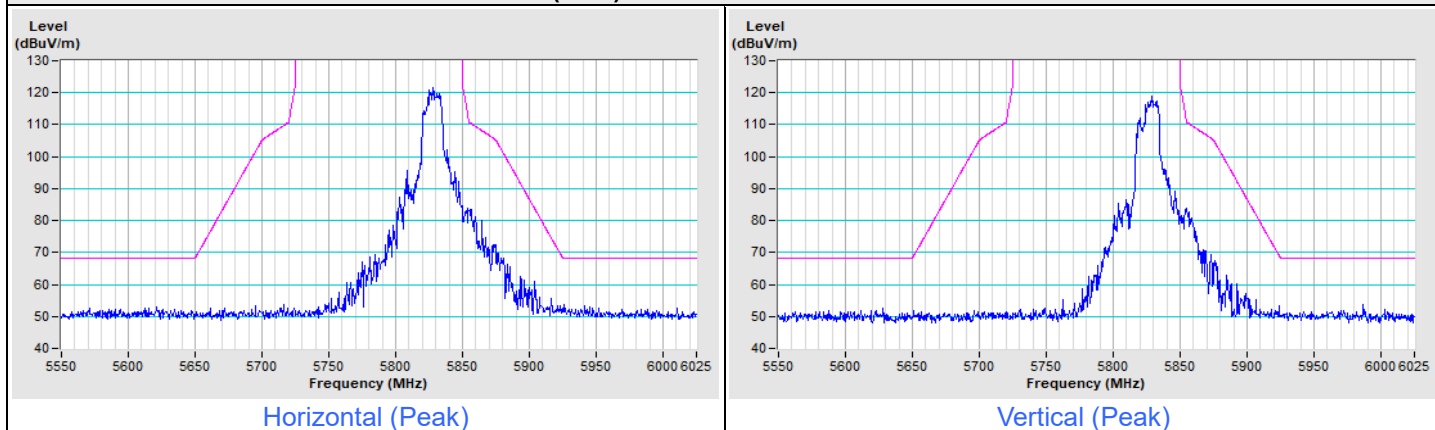


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 484+242-tone MRU Channel 42

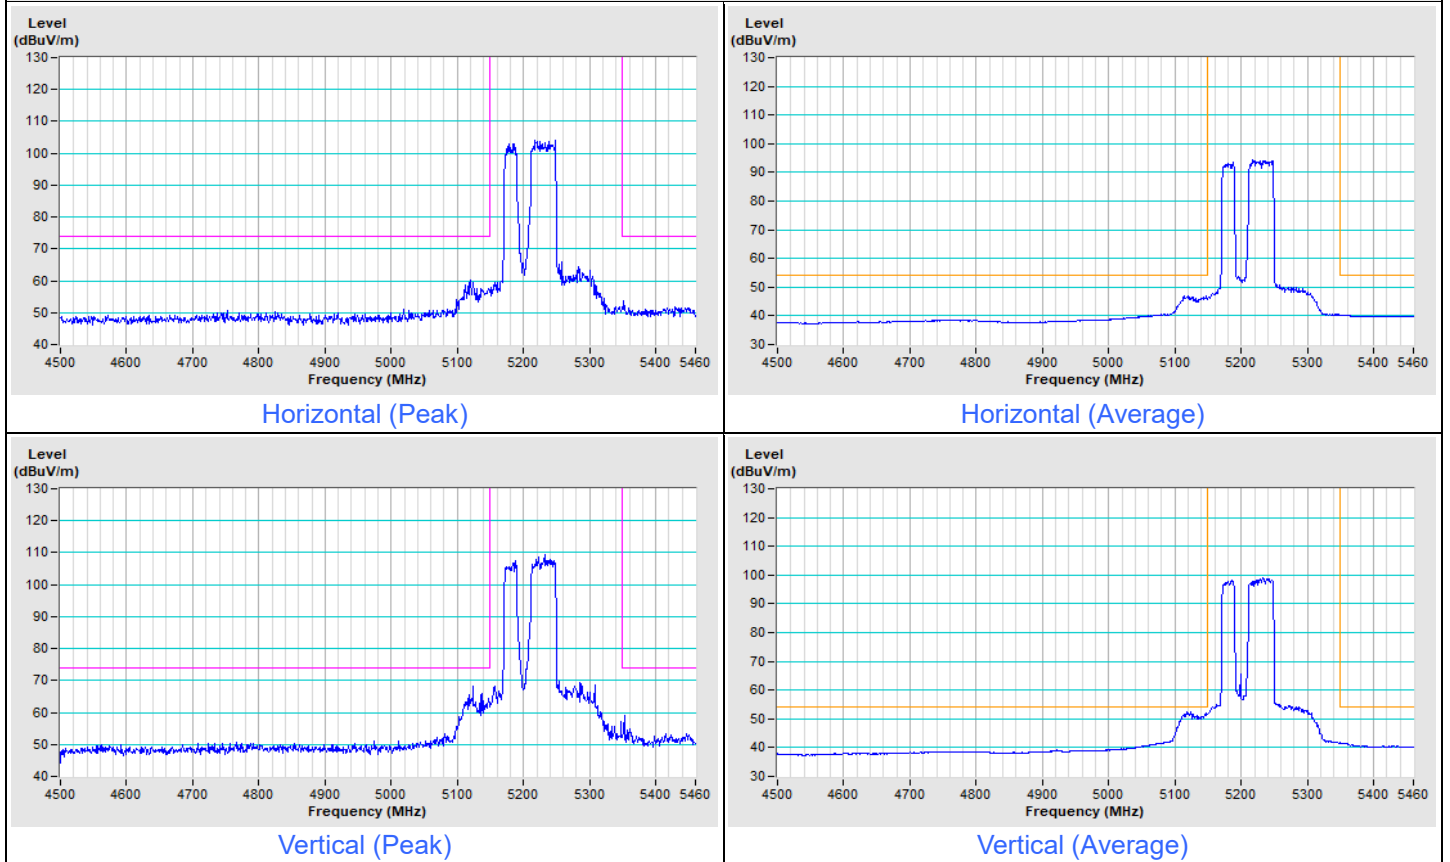


802.11be (EHT) 484+242-tone MRU Channel 58

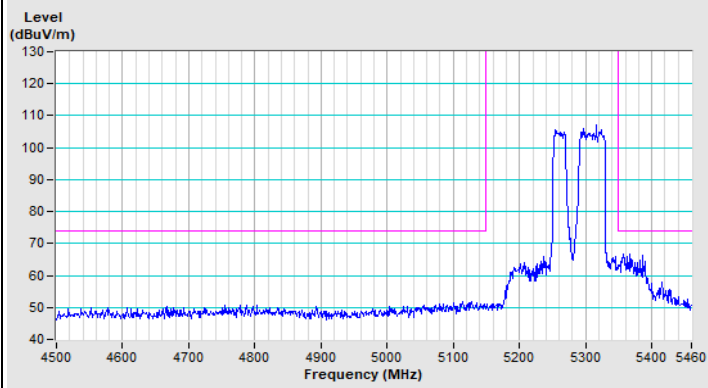


Horizontal (Peak)

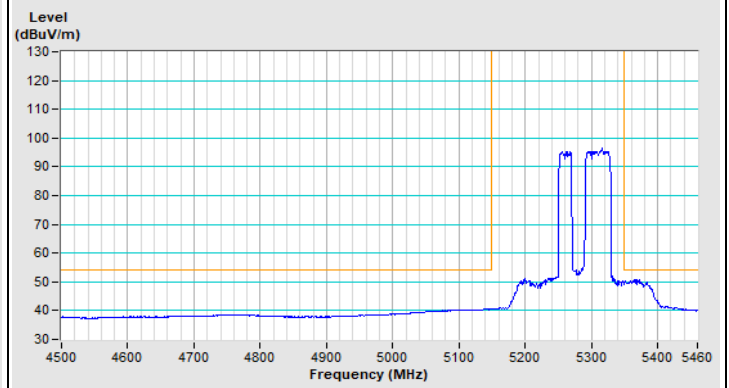

Horizontal (Average)

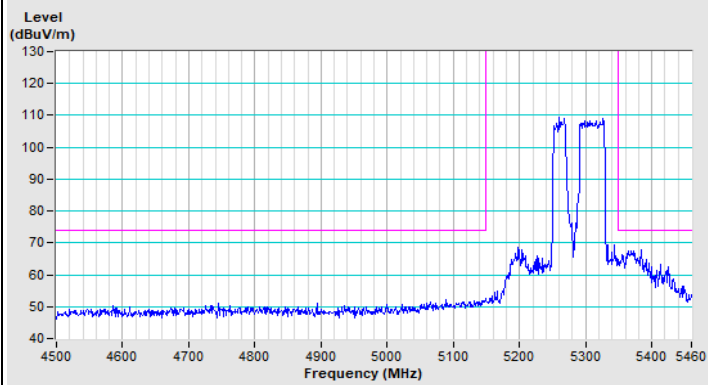


Vertical (Peak)

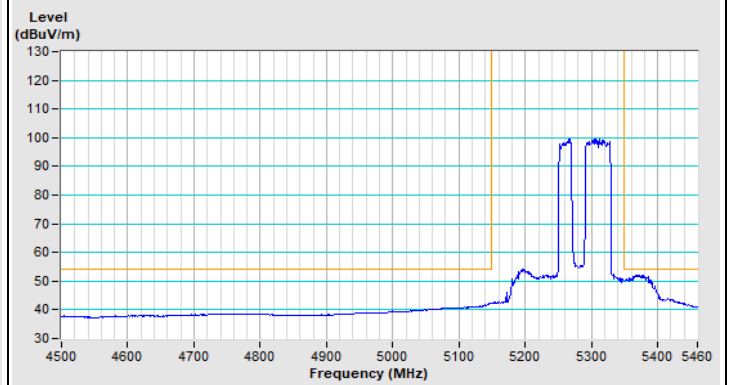

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 484+242-tone MRU Channel 106

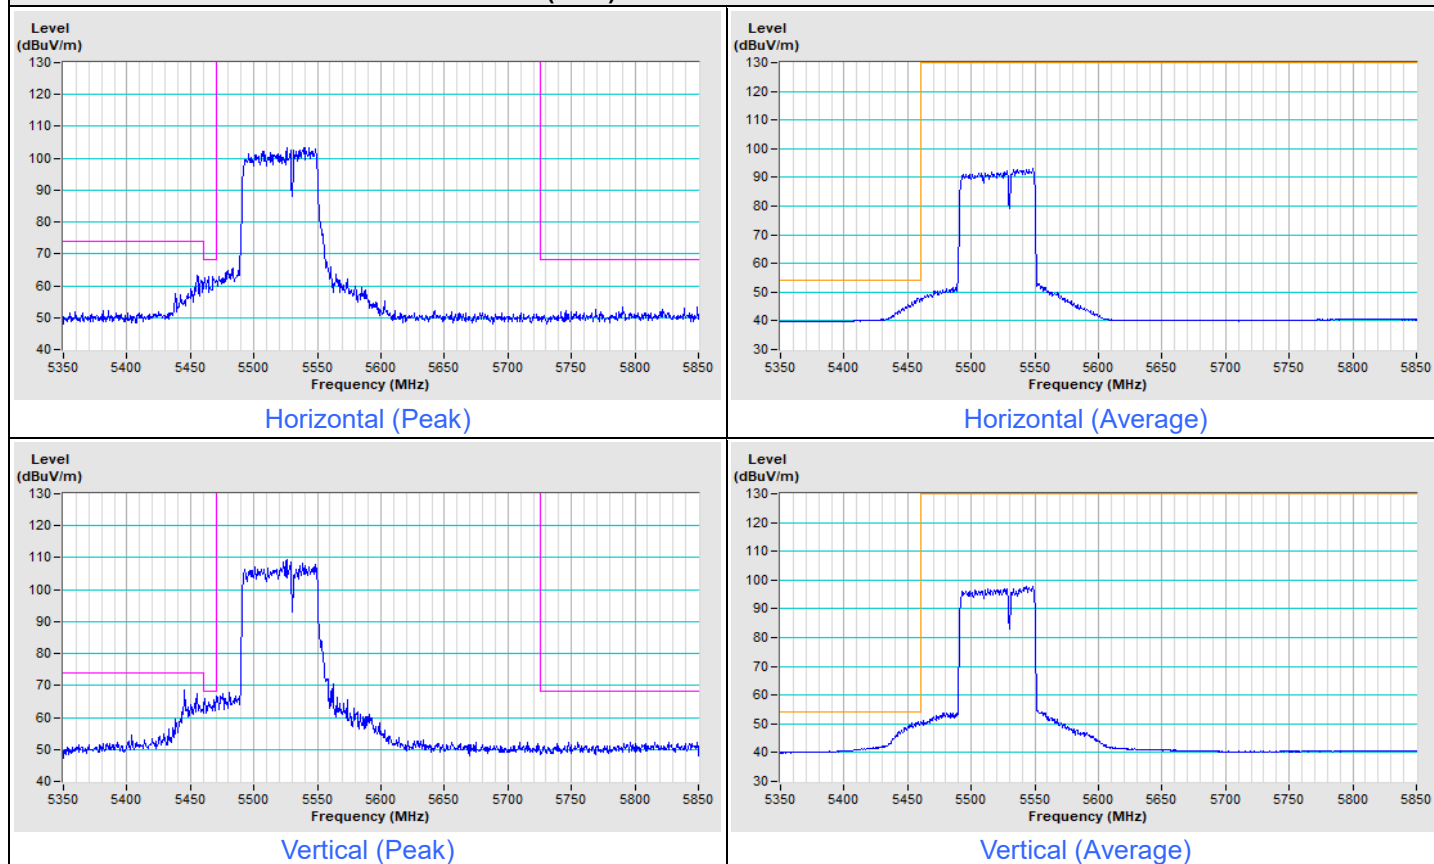


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 484+242-tone MRU Channel 155

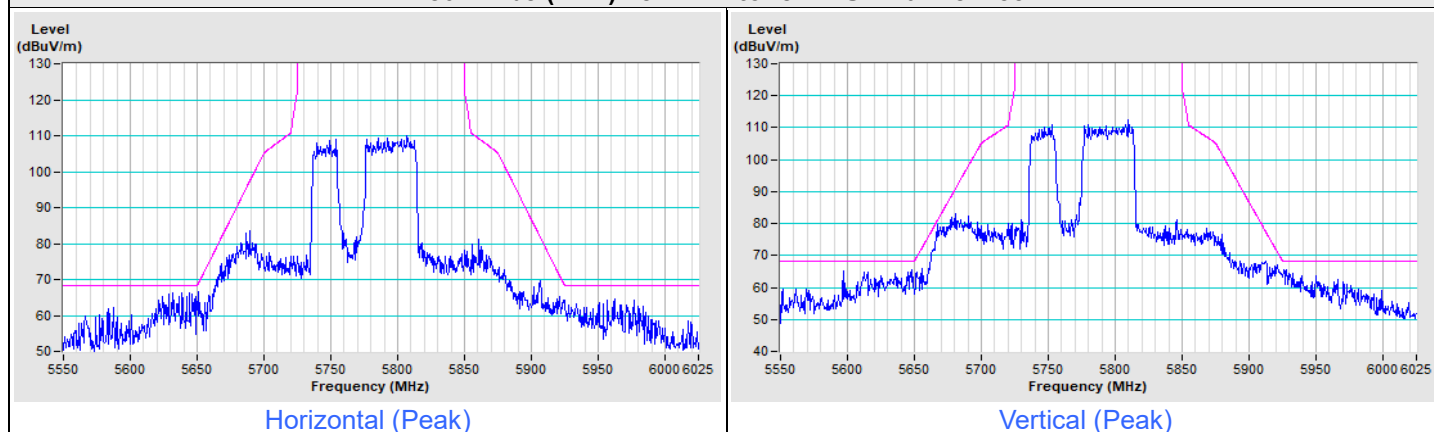


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT) 996+484-tone MRU Channel 50

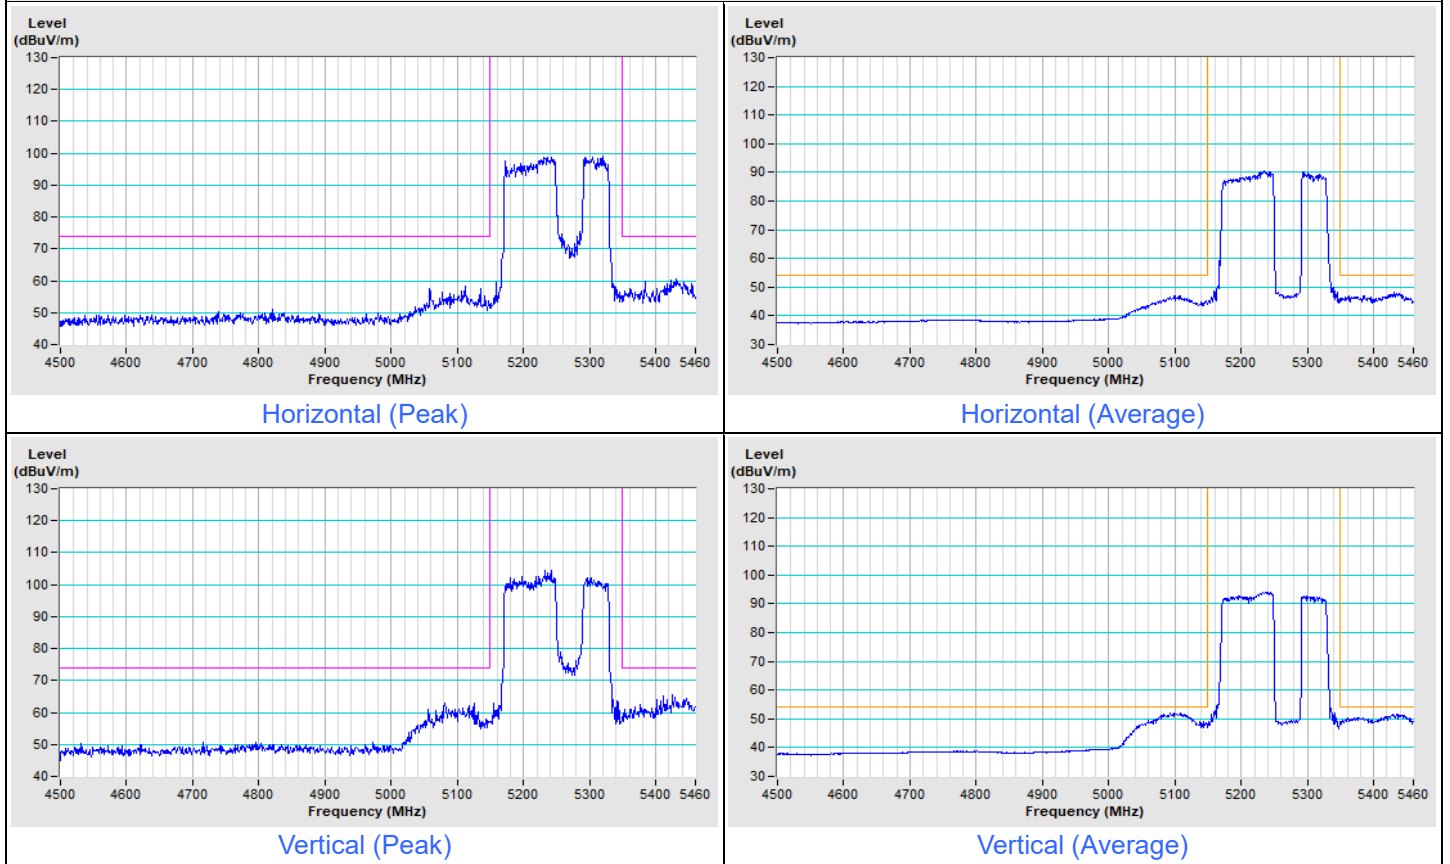


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 996+484-tone MRU Channel 114

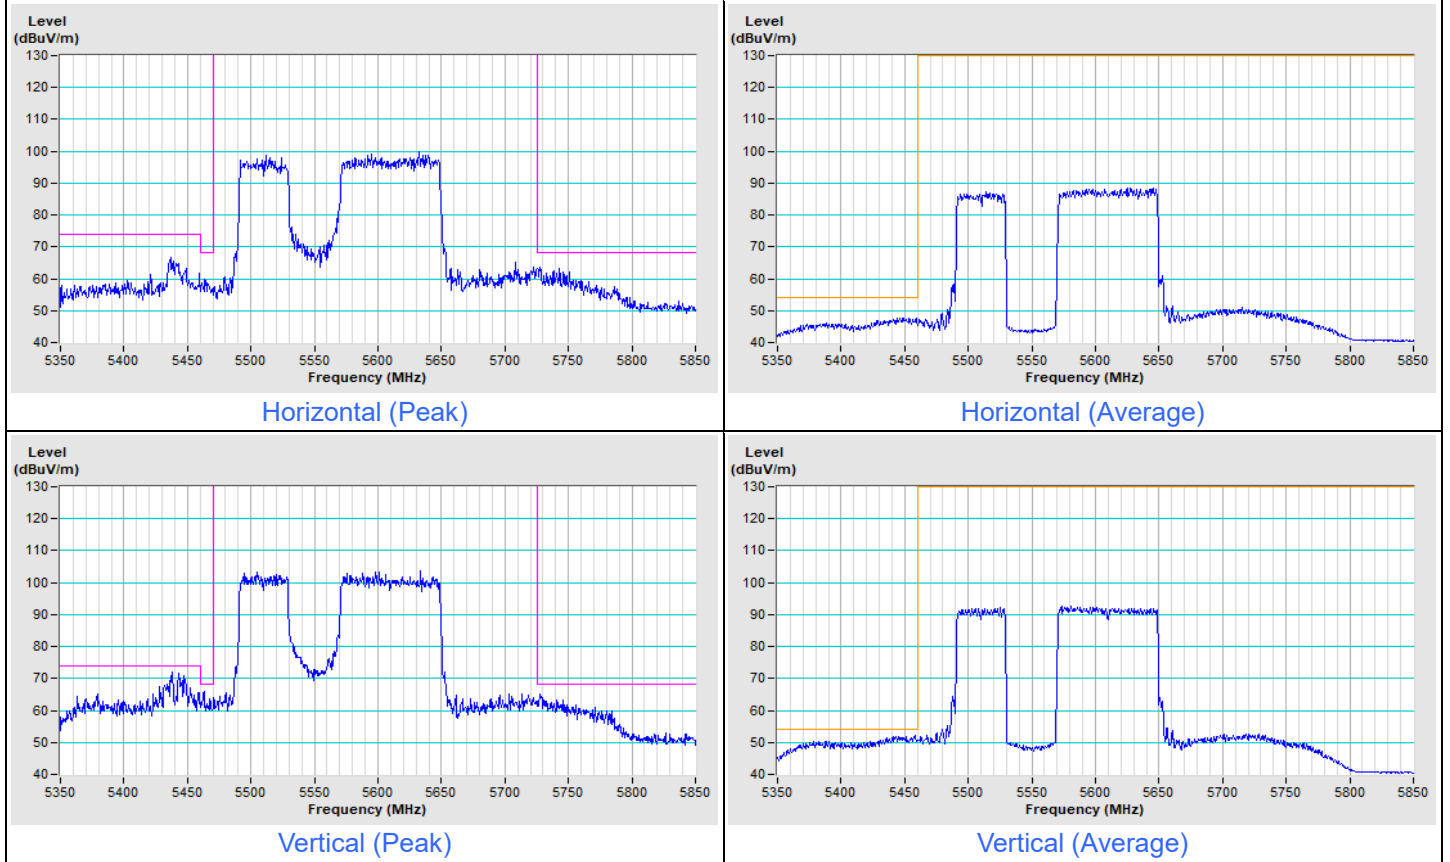


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT) 996+484+242-tone MRU Channel 50

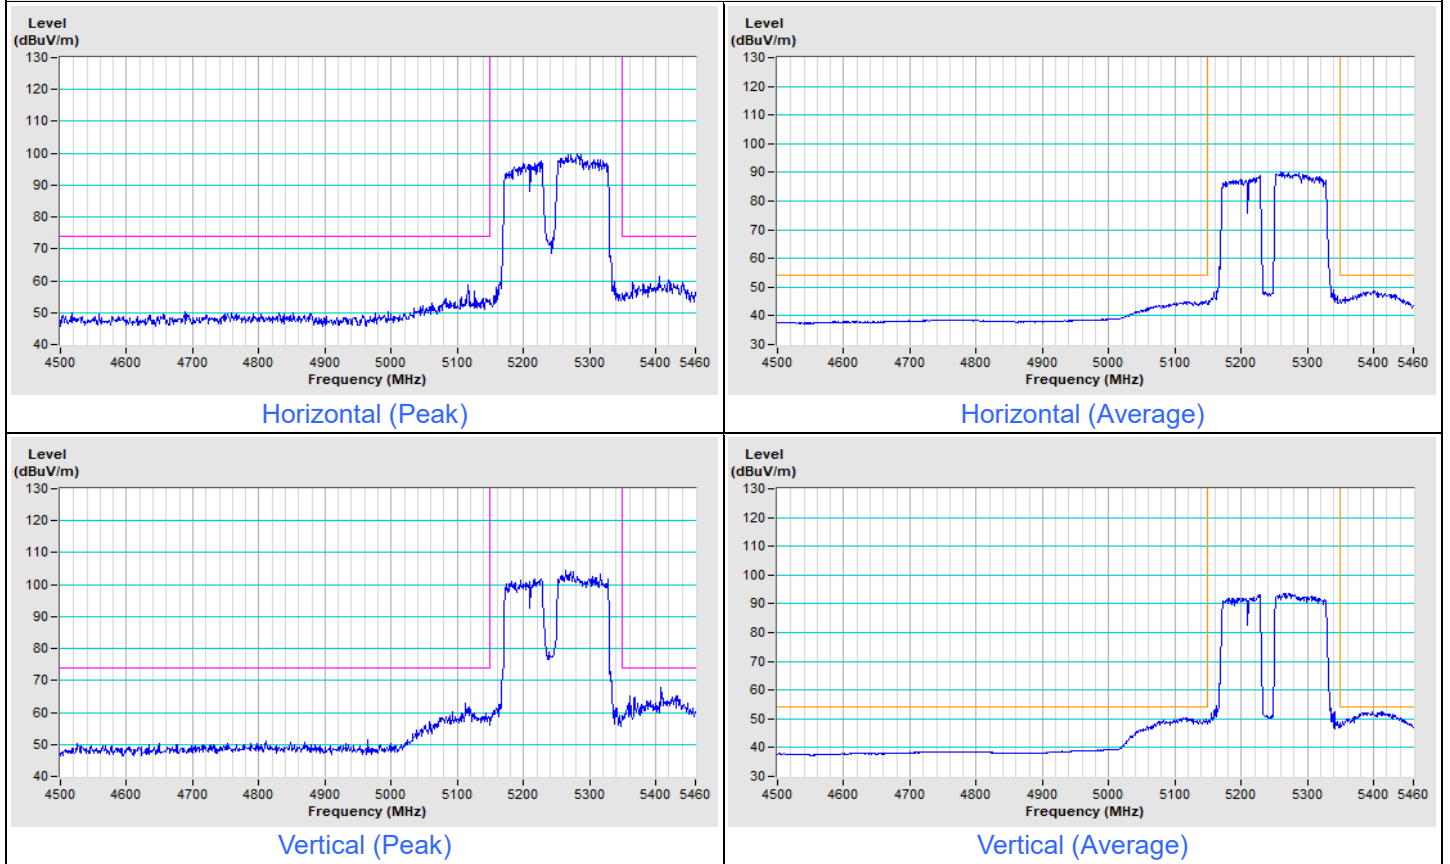

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 996+484+242-tone MRU Channel 114

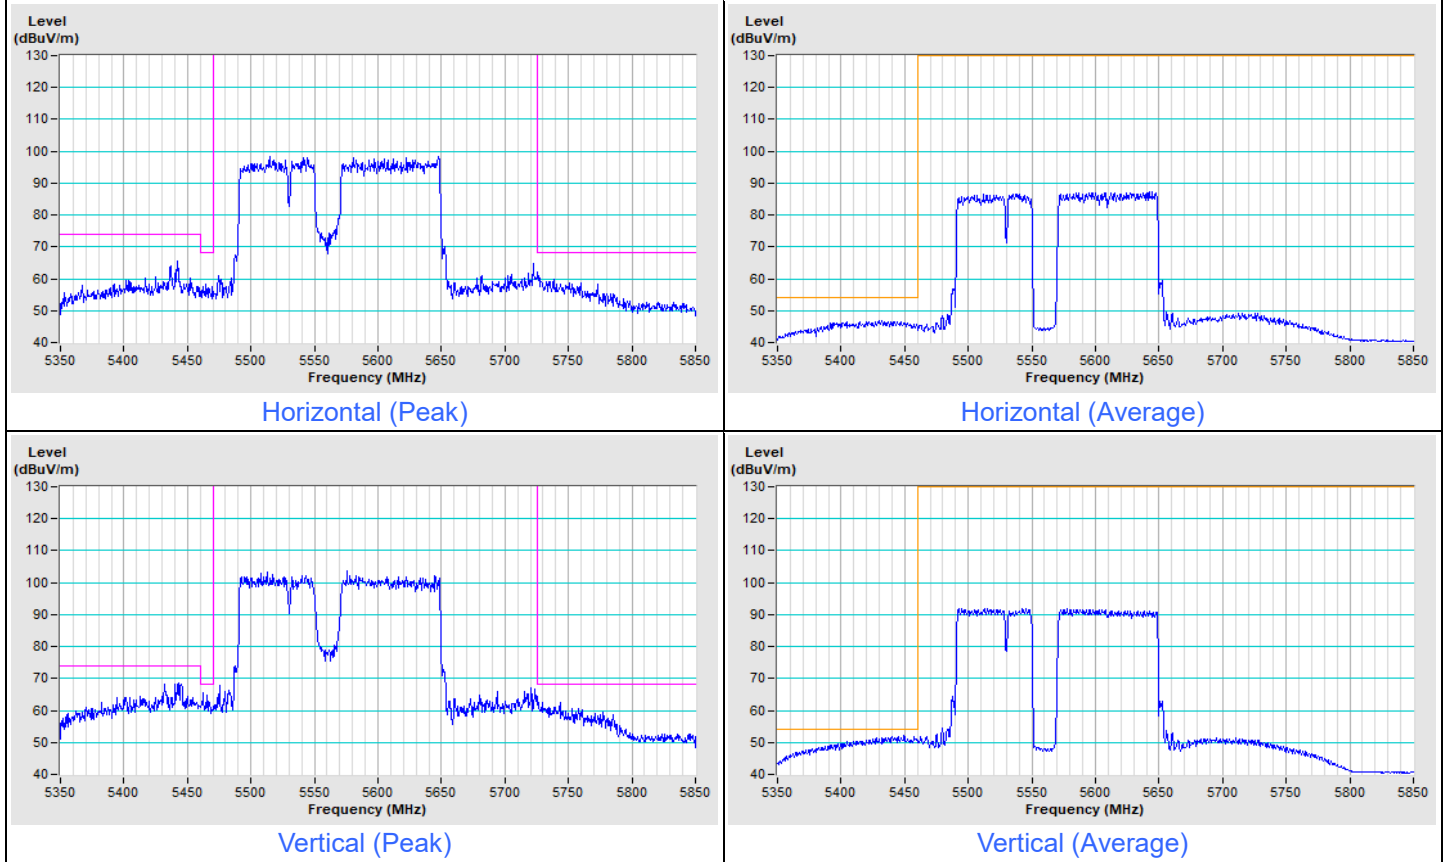

MODE C_CDD

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.5 PK	74.0	-22.5	1.06 H	215	45.5	6.0
2	5150.00	40.3 AV	54.0	-13.7	1.06 H	215	34.3	6.0
3	*5180.00	108.0 PK			1.06 H	215	102.1	5.9
4	*5180.00	97.3 AV			1.06 H	215	91.4	5.9
5	#10360.00	50.4 PK	68.2	-17.8	1.67 H	295	34.5	15.9
6	15540.00	57.4 PK	74.0	-16.6	2.56 H	305	40.5	16.9
7	15540.00	43.8 AV	54.0	-10.2	2.56 H	305	26.9	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.1 PK	74.0	-18.9	1.50 V	51	49.1	6.0
2	5150.00	42.2 AV	54.0	-11.8	1.50 V	51	36.2	6.0
3	*5180.00	115.9 PK			1.50 V	51	110.0	5.9
4	*5180.00	105.9 AV			1.50 V	51	100.0	5.9
5	#10360.00	51.7 PK	68.2	-16.5	2.05 V	197	35.8	15.9
6	15540.00	57.9 PK	74.0	-16.1	1.37 V	157	41.0	16.9
7	15540.00	43.2 AV	54.0	-10.8	1.37 V	157	26.3	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	107.8 PK			1.04 H	215	102.2	5.6
2	*5240.00	97.0 AV			1.04 H	215	91.4	5.6
3	5350.00	51.3 PK	74.0	-22.7	1.04 H	215	45.4	5.9
4	5350.00	40.0 AV	54.0	-14.0	1.04 H	215	34.1	5.9
5	#10480.00	50.7 PK	68.2	-17.5	1.71 H	293	34.7	16.0
6	15720.00	57.7 PK	74.0	-16.3	2.51 H	307	40.5	17.2
7	15720.00	43.9 AV	54.0	-10.1	2.51 H	307	26.7	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.8 PK			1.51 V	42	110.2	5.6
2	*5240.00	105.8 AV			1.51 V	42	100.2	5.6
3	5350.00	54.6 PK	74.0	-19.4	1.51 V	42	48.7	5.9
4	5350.00	41.6 AV	54.0	-12.4	1.51 V	42	35.7	5.9
5	#10480.00	50.1 PK	68.2	-18.1	2.04 V	206	34.1	16.0
6	15720.00	57.5 PK	74.0	-16.5	1.36 V	159	40.3	17.2
7	15720.00	42.9 AV	54.0	-11.1	1.36 V	159	25.7	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.8 PK	74.0	-23.2	1.03 H	206	44.8	6.0
2	5150.00	39.6 AV	54.0	-14.4	1.03 H	206	33.6	6.0
3	*5260.00	108.1 PK			1.03 H	206	102.6	5.5
4	*5260.00	97.4 AV			1.03 H	206	91.9	5.5
5	#10520.00	51.3 PK	68.2	-16.9	1.72 H	296	35.4	15.9
6	15780.00	57.3 PK	74.0	-16.7	2.57 H	311	40.2	17.1
7	15780.00	43.7 AV	54.0	-10.3	2.57 H	311	26.6	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.9 PK	74.0	-20.1	1.57 V	50	47.9	6.0
2	5150.00	41.1 AV	54.0	-12.9	1.57 V	50	35.1	6.0
3	*5260.00	115.8 PK			1.57 V	50	110.3	5.5
4	*5260.00	105.8 AV			1.57 V	50	100.3	5.5
5	#10520.00	51.8 PK	68.2	-16.4	2.08 V	206	35.9	15.9
6	15780.00	56.5 PK	74.0	-17.5	1.43 V	142	39.4	17.1
7	15780.00	42.4 AV	54.0	-11.6	1.43 V	142	25.3	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	108.5 PK			1.11 H	215	102.9	5.6
2	*5320.00	97.1 AV			1.11 H	215	91.5	5.6
3	5350.00	52.5 PK	74.0	-21.5	1.11 H	215	46.6	5.9
4	5350.00	40.3 AV	54.0	-13.7	1.11 H	215	34.4	5.9
5	10640.00	50.3 PK	74.0	-23.7	1.68 H	300	33.9	16.4
6	10640.00	38.8 AV	54.0	-15.2	1.68 H	300	22.4	16.4
7	15960.00	52.4 PK	74.0	-21.6	2.58 H	290	35.2	17.2
8	15960.00	40.4 AV	54.0	-13.6	2.58 H	290	23.2	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.5 PK			1.60 V	45	109.9	5.6
2	*5320.00	105.7 AV			1.60 V	45	100.1	5.6
3	5350.00	53.2 PK	74.0	-20.8	1.60 V	45	47.3	5.9
4	5350.00	42.9 AV	54.0	-11.1	1.60 V	45	37.0	5.9
5	10640.00	49.9 PK	74.0	-24.1	2.01 V	209	33.5	16.4
6	10640.00	38.4 AV	54.0	-15.6	2.01 V	209	22.0	16.4
7	15960.00	51.8 PK	74.0	-22.2	1.34 V	153	34.6	17.2
8	15960.00	39.1 AV	54.0	-14.9	1.34 V	153	21.9	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.3 PK	74.0	-21.7	1.20 H	212	46.3	6.0
2	5460.00	40.1 AV	54.0	-13.9	1.20 H	212	34.1	6.0
3	#5470.00	51.3 PK	68.2	-16.9	1.20 H	212	45.3	6.0
4	*5500.00	107.5 PK			1.20 H	212	101.5	6.0
5	*5500.00	96.8 AV			1.20 H	212	90.8	6.0
6	11000.00	51.4 PK	74.0	-22.6	1.68 H	296	34.5	16.9
7	11000.00	39.4 AV	54.0	-14.6	1.68 H	296	22.5	16.9
8	#16500.00	54.0 PK	68.2	-14.2	2.52 H	318	34.4	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.2 PK	74.0	-20.8	1.09 V	101	47.2	6.0
2	5460.00	42.6 AV	54.0	-11.4	1.09 V	101	36.6	6.0
3	#5470.00	56.2 PK	68.2	-12.0	1.09 V	101	50.2	6.0
4	*5500.00	118.9 PK			1.09 V	101	112.9	6.0
5	*5500.00	107.7 AV			1.09 V	101	101.7	6.0
6	11000.00	50.9 PK	74.0	-23.1	2.09 V	196	34.0	16.9
7	11000.00	39.0 AV	54.0	-15.0	2.09 V	196	22.1	16.9
8	#16500.00	54.2 PK	68.2	-14.0	1.32 V	158	34.6	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	105.6 PK			1.06 H	203	99.5	6.1
2	*5700.00	94.8 AV			1.06 H	203	88.7	6.1
3	#5725.00	52.8 PK	68.2	-15.4	1.06 H	203	46.6	6.2
4	11400.00	52.3 PK	74.0	-21.7	1.67 H	281	35.4	16.9
5	11400.00	40.2 AV	54.0	-13.8	1.67 H	281	23.3	16.9
6	#17100.00	54.8 PK	68.2	-13.4	2.53 H	309	34.6	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.6 PK			1.12 V	88	107.5	6.1
2	*5700.00	103.4 AV			1.12 V	88	97.3	6.1
3	#5725.00	53.4 PK	68.2	-14.8	1.12 V	88	47.2	6.2
4	11400.00	50.3 PK	74.0	-23.7	2.03 V	206	33.4	16.9
5	11400.00	38.3 AV	54.0	-15.7	2.03 V	206	21.4	16.9
6	#17100.00	53.9 PK	68.2	-14.3	1.31 V	167	33.7	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.4 PK	74.0	-22.6	1.15 H	214	45.4	6.0
2	5460.00	38.6 AV	54.0	-15.4	1.15 H	214	32.6	6.0
3	#5470.00	51.5 PK	68.2	-16.7	1.15 H	214	45.5	6.0
4	*5720.00	108.1 PK			1.15 H	214	101.9	6.2
5	*5720.00	96.9 AV			1.15 H	214	90.7	6.2
6	#5850.00	52.1 PK	68.2	-16.1	1.15 H	214	45.5	6.6
7	11440.00	49.1 PK	74.0	-24.9	1.63 H	280	32.2	16.9
8	11440.00	38.2 AV	54.0	-15.8	1.63 H	280	21.3	16.9
9	#17160.00	54.8 PK	68.2	-13.4	2.61 H	314	34.8	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.6 PK	74.0	-22.4	1.55 V	39	45.6	6.0
2	5460.00	38.7 AV	54.0	-15.3	1.55 V	39	32.7	6.0
3	#5470.00	51.6 PK	68.2	-16.6	1.55 V	39	45.6	6.0
4	*5720.00	115.9 PK			1.55 V	39	109.7	6.2
5	*5720.00	106.1 AV			1.55 V	39	99.9	6.2
6	#5850.00	52.8 PK	68.2	-15.4	1.55 V	39	46.2	6.6
7	11440.00	49.1 PK	74.0	-24.9	2.07 V	198	32.2	16.9
8	11440.00	38.1 AV	54.0	-15.9	2.07 V	198	21.2	16.9
9	#17160.00	53.6 PK	68.2	-14.6	1.37 V	150	33.6	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5624.59	51.7 PK	68.2	-16.5	3.03 H	42	45.6	6.1
2	*5745.00	105.6 PK			3.03 H	42	99.3	6.3
3	*5745.00	95.7 AV			3.03 H	42	89.4	6.3
4	#5936.15	52.2 PK	68.2	-16.0	3.03 H	42	45.4	6.8
5	11490.00	49.7 PK	74.0	-24.3	1.57 H	312	32.7	17.0
6	11490.00	38.3 AV	54.0	-15.7	1.57 H	312	21.3	17.0
7	#17235.00	54.7 PK	68.2	-13.5	1.56 H	314	34.2	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5630.39	54.2 PK	68.2	-14.0	1.64 V	270	48.1	6.1
2	*5745.00	120.1 PK			1.64 V	270	113.8	6.3
3	*5745.00	110.4 AV			1.64 V	270	104.1	6.3
4	#5928.72	52.9 PK	68.2	-15.3	1.64 V	270	46.1	6.8
5	11490.00	49.6 PK	74.0	-24.4	1.52 V	345	32.6	17.0
6	11490.00	38.8 AV	54.0	-15.2	1.52 V	345	21.8	17.0
7	#17235.00	53.8 PK	68.2	-14.4	1.47 V	321	33.3	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 52+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.86	52.5 PK	68.2	-15.7	2.84 H	158	46.4	6.1
2	*5825.00	110.2 PK			2.84 H	158	103.5	6.7
3	*5825.00	99.6 AV			2.84 H	158	92.9	6.7
4	#5953.73	51.9 PK	68.2	-16.3	2.84 H	158	45.2	6.7
5	11650.00	48.9 PK	74.0	-25.1	1.63 H	318	32.1	16.8
6	11650.00	37.9 AV	54.0	-16.1	1.63 H	318	21.1	16.8
7	#17475.00	55.4 PK	68.2	-12.8	1.48 H	316	32.6	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5610.84	53.5 PK	68.2	-14.7	1.75 V	93	47.4	6.1
2	*5825.00	122.0 PK			1.75 V	93	115.3	6.7
3	*5825.00	110.6 AV			1.75 V	93	103.9	6.7
4	#5949.57	54.9 PK	68.2	-13.3	1.75 V	93	48.2	6.7
5	11650.00	49.5 PK	74.0	-24.5	1.50 V	339	32.7	16.8
6	11650.00	38.2 AV	54.0	-15.8	1.50 V	339	21.4	16.8
7	#17475.00	53.5 PK	68.2	-14.7	1.52 V	320	30.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	1.05 H	216	51.5	6.0
2	5150.00	41.3 AV	54.0	-12.7	1.05 H	216	35.3	6.0
3	*5180.00	106.6 PK			1.05 H	216	100.7	5.9
4	*5180.00	96.8 AV			1.05 H	216	90.9	5.9
5	#10360.00	51.1 PK	68.2	-17.1	1.69 H	307	35.2	15.9
6	15540.00	61.8 PK	74.0	-12.2	2.59 H	301	44.9	16.9
7	15540.00	46.6 AV	54.0	-7.4	2.59 H	301	29.7	16.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.5 PK	74.0	-9.5	1.52 V	49	58.5	6.0
2	5150.00	45.4 AV	54.0	-8.6	1.52 V	49	39.4	6.0
3	*5180.00	115.2 PK			1.52 V	49	109.3	5.9
4	*5180.00	105.2 AV			1.52 V	49	99.3	5.9
5	#10360.00	50.4 PK	68.2	-17.8	2.09 V	207	34.5	15.9
6	15540.00	59.0 PK	74.0	-15.0	1.32 V	145	42.1	16.9
7	15540.00	44.0 AV	54.0	-10.0	1.32 V	145	27.1	16.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	106.4 PK			1.03 H	223	100.8	5.6
2	*5240.00	96.5 AV			1.03 H	223	90.9	5.6
3	5350.00	51.7 PK	74.0	-22.3	1.03 H	223	45.8	5.9
4	5350.00	40.4 AV	54.0	-13.6	1.03 H	223	34.5	5.9
5	#10480.00	50.1 PK	68.2	-18.1	1.69 H	298	34.1	16.0
6	15720.00	62.3 PK	74.0	-11.7	2.61 H	317	45.1	17.2
7	15720.00	46.9 AV	54.0	-7.1	2.61 H	317	29.7	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	114.5 PK			1.46 V	36	108.9	5.6
2	*5240.00	104.8 AV			1.46 V	36	99.2	5.6
3	5350.00	54.0 PK	74.0	-20.0	1.46 V	36	48.1	5.9
4	5350.00	41.2 AV	54.0	-12.8	1.46 V	36	35.3	5.9
5	#10480.00	51.2 PK	68.2	-17.0	1.99 V	213	35.2	16.0
6	15720.00	58.8 PK	74.0	-15.2	1.39 V	150	41.6	17.2
7	15720.00	44.0 AV	54.0	-10.0	1.39 V	150	26.8	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.5 PK	74.0	-22.5	1.03 H	206	45.5	6.0
2	5150.00	40.4 AV	54.0	-13.6	1.03 H	206	34.4	6.0
3	*5260.00	106.8 PK			1.03 H	206	101.3	5.5
4	*5260.00	97.7 AV			1.03 H	206	92.2	5.5
5	#10520.00	50.2 PK	68.2	-18.0	1.64 H	293	34.3	15.9
6	15780.00	61.1 PK	74.0	-12.9	2.60 H	313	44.0	17.1
7	15780.00	46.0 AV	54.0	-8.0	2.60 H	313	28.9	17.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.1 PK	74.0	-19.9	1.50 V	59	48.1	6.0
2	5150.00	41.2 AV	54.0	-12.8	1.50 V	59	35.2	6.0
3	*5260.00	115.3 PK			1.50 V	59	109.8	5.5
4	*5260.00	105.5 AV			1.50 V	59	100.0	5.5
5	#10520.00	51.4 PK	68.2	-16.8	2.09 V	186	35.5	15.9
6	15780.00	58.5 PK	74.0	-15.5	1.42 V	154	41.4	17.1
7	15780.00	44.1 AV	54.0	-9.9	1.42 V	154	27.0	17.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	106.5 PK			1.10 H	214	100.9	5.6
2	*5320.00	97.3 AV			1.10 H	214	91.7	5.6
3	5350.00	53.3 PK	74.0	-20.7	1.10 H	214	47.4	5.9
4	5350.00	40.3 AV	54.0	-13.7	1.10 H	214	34.4	5.9
5	10640.00	50.0 PK	74.0	-24.0	1.69 H	294	33.6	16.4
6	10640.00	38.8 AV	54.0	-15.2	1.69 H	294	22.4	16.4
7	15960.00	52.7 PK	74.0	-21.3	2.58 H	297	35.5	17.2
8	15960.00	40.5 AV	54.0	-13.5	2.58 H	297	23.3	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	117.7 PK			1.59 V	46	112.1	5.6
2	*5320.00	105.4 AV			1.59 V	46	99.8	5.6
3	5350.00	57.9 PK	74.0	-16.1	1.59 V	46	52.0	5.9
4	5350.00	43.7 AV	54.0	-10.3	1.59 V	46	37.8	5.9
5	10640.00	50.0 PK	74.0	-24.0	2.06 V	205	33.6	16.4
6	10640.00	38.5 AV	54.0	-15.5	2.06 V	205	22.1	16.4
7	15960.00	51.4 PK	74.0	-22.6	1.32 V	165	34.2	17.2
8	15960.00	39.3 AV	54.0	-14.7	1.32 V	165	22.1	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.2 PK	74.0	-20.8	1.18 H	214	47.2	6.0
2	5460.00	40.6 AV	54.0	-13.4	1.18 H	214	34.6	6.0
3	#5470.00	54.0 PK	68.2	-14.2	1.18 H	214	48.0	6.0
4	*5500.00	107.6 PK			1.18 H	214	101.6	6.0
5	*5500.00	96.8 AV			1.18 H	214	90.8	6.0
6	11000.00	50.9 PK	74.0	-23.1	1.71 H	304	34.0	16.9
7	11000.00	39.1 AV	54.0	-14.9	1.71 H	304	22.2	16.9
8	#16500.00	54.1 PK	68.2	-14.1	2.58 H	316	34.5	19.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.3 PK	74.0	-16.7	1.11 V	99	51.3	6.0
2	5460.00	45.1 AV	54.0	-8.9	1.11 V	99	39.1	6.0
3	#5470.00	62.2 PK	68.2	-6.0	1.11 V	99	56.2	6.0
4	*5500.00	119.5 PK			1.11 V	99	113.5	6.0
5	*5500.00	107.6 AV			1.11 V	99	101.6	6.0
6	11000.00	50.5 PK	74.0	-23.5	2.04 V	210	33.6	16.9
7	11000.00	38.8 AV	54.0	-15.2	2.04 V	210	21.9	16.9
8	#16500.00	54.3 PK	68.2	-13.9	1.39 V	141	34.7	19.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	105.6 PK			1.19 H	220	99.5	6.1
2	*5700.00	95.1 AV			1.19 H	220	89.0	6.1
3	#5725.00	53.5 PK	68.2	-14.7	1.19 H	220	47.3	6.2
4	11400.00	51.4 PK	74.0	-22.6	1.62 H	293	34.5	16.9
5	11400.00	39.9 AV	54.0	-14.1	1.62 H	293	23.0	16.9
6	#17100.00	54.6 PK	68.2	-13.6	2.50 H	295	34.4	20.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	116.5 PK			1.21 V	101	110.4	6.1
2	*5700.00	106.0 AV			1.21 V	101	99.9	6.1
3	#5725.00	54.0 PK	68.2	-14.2	1.21 V	101	47.8	6.2
4	11400.00	49.7 PK	74.0	-24.3	2.06 V	203	32.8	16.9
5	11400.00	38.2 AV	54.0	-15.8	2.06 V	203	21.3	16.9
6	#17100.00	54.6 PK	68.2	-13.6	1.37 V	161	34.4	20.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.5 PK	74.0	-22.5	1.04 H	202	45.5	6.0
2	5460.00	38.3 AV	54.0	-15.7	1.04 H	202	32.3	6.0
3	#5470.00	52.1 PK	68.2	-16.1	1.04 H	202	46.1	6.0
4	*5720.00	109.0 PK			1.04 H	202	102.8	6.2
5	*5720.00	97.4 AV			1.04 H	202	91.2	6.2
6	#5850.00	52.6 PK	68.2	-15.6	1.04 H	202	46.0	6.6
7	11440.00	48.5 PK	74.0	-25.5	1.69 H	281	31.6	16.9
8	11440.00	37.7 AV	54.0	-16.3	1.69 H	281	20.8	16.9
9	#17160.00	55.2 PK	68.2	-13.0	2.52 H	296	35.2	20.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.6 PK	74.0	-22.4	1.32 V	82	45.6	6.0
2	5460.00	38.5 AV	54.0	-15.5	1.32 V	82	32.5	6.0
3	#5470.00	51.1 PK	68.2	-17.1	1.32 V	82	45.1	6.0
4	*5720.00	119.6 PK			1.32 V	82	113.4	6.2
5	*5720.00	108.6 AV			1.32 V	82	102.4	6.2
6	#5850.00	53.3 PK	68.2	-14.9	1.32 V	82	46.7	6.6
7	11440.00	48.5 PK	74.0	-25.5	2.09 V	188	31.6	16.9
8	11440.00	37.7 AV	54.0	-16.3	2.09 V	188	20.8	16.9
9	#17160.00	53.9 PK	68.2	-14.3	1.32 V	145	33.9	20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.58	51.4 PK	68.2	-16.8	2.80 H	139	45.3	6.1
2	*5745.00	106.4 PK			2.80 H	139	100.1	6.3
3	*5745.00	95.6 AV			2.80 H	139	89.3	6.3
4	#5927.68	51.9 PK	68.2	-16.3	2.80 H	139	45.1	6.8
5	11490.00	49.8 PK	74.0	-24.2	1.53 H	317	32.8	17.0
6	11490.00	38.7 AV	54.0	-15.3	1.53 H	317	21.7	17.0
7	#17235.00	54.5 PK	68.2	-13.7	1.50 H	293	34.0	20.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5625.45	53.5 PK	68.2	-14.7	1.64 V	269	47.4	6.1
2	*5745.00	119.0 PK			1.64 V	269	112.7	6.3
3	*5745.00	107.8 AV			1.64 V	269	101.5	6.3
4	#5946.79	53.1 PK	68.2	-15.1	1.64 V	269	46.4	6.7
5	11490.00	49.2 PK	74.0	-24.8	1.55 V	348	32.2	17.0
6	11490.00	38.4 AV	54.0	-15.6	1.55 V	348	21.4	17.0
7	#17235.00	53.8 PK	68.2	-14.4	1.46 V	314	33.3	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 106+26-tone MRU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5605.14	51.4 PK	68.2	-16.8	2.67 H	159	45.3	6.1
2	*5825.00	107.2 PK			2.67 H	159	100.5	6.7
3	*5825.00	96.9 AV			2.67 H	159	90.2	6.7
4	#5940.76	51.8 PK	68.2	-16.4	2.67 H	159	45.1	6.7
5	11650.00	49.4 PK	74.0	-24.6	1.57 H	341	32.6	16.8
6	11650.00	37.9 AV	54.0	-16.1	1.57 H	341	21.1	16.8
7	#17475.00	54.9 PK	68.2	-13.3	1.53 H	317	32.1	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5613.85	52.6 PK	68.2	-15.6	1.75 V	91	46.5	6.1
2	*5825.00	119.5 PK			1.75 V	91	112.8	6.7
3	*5825.00	108.3 AV			1.75 V	91	101.6	6.7
4	#5952.90	53.4 PK	68.2	-14.8	1.75 V	91	46.7	6.7
5	11650.00	49.1 PK	74.0	-24.9	1.52 V	350	32.3	16.8
6	11650.00	38.2 AV	54.0	-15.8	1.52 V	350	21.4	16.8
7	#17475.00	53.4 PK	68.2	-14.8	1.51 V	314	30.6	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5123.00	55.4 PK	74.0	-18.6	1.27 H	214	49.3	6.1
2	5123.00	43.3 AV	54.0	-10.7	1.27 H	214	37.2	6.1
3	*5210.00	97.8 PK			1.27 H	214	92.1	5.7
4	*5210.00	88.0 AV			1.27 H	214	82.3	5.7
5	5350.00	53.3 PK	74.0	-20.7	1.27 H	214	47.4	5.9
6	5350.00	40.2 AV	54.0	-13.8	1.27 H	214	34.3	5.9
7	#10420.00	50.5 PK	68.2	-17.7	1.64 H	309	34.4	16.1
8	15630.00	60.5 PK	74.0	-13.5	2.55 H	290	43.5	17.0
9	15630.00	47.3 AV	54.0	-6.7	2.55 H	290	30.3	17.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	1.50 V	50	59.7	6.0
2	5150.00	52.5 AV	54.0	-1.5	1.50 V	50	46.5	6.0
3	*5210.00	107.0 PK			1.50 V	50	101.3	5.7
4	*5210.00	96.4 AV			1.50 V	50	90.7	5.7
5	5350.00	55.4 PK	74.0	-18.6	1.50 V	50	49.5	5.9
6	5350.00	41.7 AV	54.0	-12.3	1.50 V	50	35.8	5.9
7	#10420.00	48.7 PK	68.2	-19.5	2.01 V	195	32.6	16.1
8	15630.00	57.9 PK	74.0	-16.1	1.31 V	152	40.9	17.0
9	15630.00	43.6 AV	54.0	-10.4	1.31 V	152	26.6	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.3 PK	74.0	-21.7	1.06 H	216	46.3	6.0
2	5150.00	40.3 AV	54.0	-13.7	1.06 H	216	34.3	6.0
3	*5290.00	98.3 PK			1.06 H	216	92.9	5.4
4	*5290.00	88.3 AV			1.06 H	216	82.9	5.4
5	5350.00	60.2 PK	74.0	-13.8	1.06 H	216	54.3	5.9
6	5350.00	45.1 AV	54.0	-8.9	1.06 H	216	39.2	5.9
7	#10580.00	50.8 PK	68.2	-17.4	1.69 H	307	34.5	16.3
8	15870.00	60.1 PK	74.0	-13.9	2.53 H	300	42.8	17.3
9	15870.00	47.2 AV	54.0	-6.8	2.53 H	300	29.9	17.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.0 PK	74.0	-20.0	1.00 V	89	48.0	6.0
2	5150.00	42.6 AV	54.0	-11.4	1.00 V	89	36.6	6.0
3	*5290.00	109.8 PK			1.00 V	89	104.4	5.4
4	*5290.00	98.8 AV			1.00 V	89	93.4	5.4
5	5350.00	68.0 PK	74.0	-6.0	1.00 V	89	62.1	5.9
6	5350.00	52.4 AV	54.0	-1.6	1.00 V	89	46.5	5.9
7	#10580.00	49.4 PK	68.2	-18.8	2.11 V	212	33.1	16.3
8	15870.00	56.9 PK	74.0	-17.1	1.33 V	152	39.6	17.3
9	15870.00	42.2 AV	54.0	-11.8	1.33 V	152	24.9	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.0 PK	74.0	-17.0	1.04 H	209	51.0	6.0
2	5460.00	41.7 AV	54.0	-12.3	1.04 H	209	35.7	6.0
3	#5470.00	57.5 PK	68.2	-10.7	1.04 H	209	51.5	6.0
4	*5530.00	97.5 PK			1.04 H	209	91.5	6.0
5	*5530.00	86.0 AV			1.04 H	209	80.0	6.0
6	#5725.00	52.2 PK	68.2	-16.0	1.04 H	209	46.0	6.2
7	11060.00	49.5 PK	74.0	-24.5	1.63 H	302	32.6	16.9
8	11060.00	38.3 AV	54.0	-15.7	1.63 H	302	21.4	16.9
9	#16590.00	53.4 PK	68.2	-14.8	2.62 H	313	33.0	20.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	69.9 PK	74.0	-4.1	1.06 V	93	63.9	6.0
2	5460.00	48.5 AV	54.0	-5.5	1.06 V	93	42.5	6.0
3	#5470.00	66.7 PK	68.2	-1.5	1.06 V	93	60.7	6.0
4	*5530.00	110.2 PK			1.06 V	93	104.2	6.0
5	*5530.00	97.3 AV			1.06 V	93	91.3	6.0
6	#5725.00	53.6 PK	68.2	-14.6	1.06 V	93	47.4	6.2
7	11060.00	48.9 PK	74.0	-25.1	1.99 V	186	32.0	16.9
8	11060.00	37.3 AV	54.0	-16.7	1.99 V	186	20.4	16.9
9	#16590.00	54.4 PK	68.2	-13.8	1.41 V	143	34.0	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	99.8 PK			1.02 H	204	93.9	5.9
2	*5610.00	88.5 AV			1.02 H	204	82.6	5.9
3	#5725.00	58.0 PK	68.2	-10.2	1.02 H	204	51.8	6.2
4	11220.00	50.1 PK	74.0	-23.9	1.68 H	288	33.4	16.7
5	11220.00	38.7 AV	54.0	-15.3	1.68 H	288	22.0	16.7
6	#16830.00	53.8 PK	68.2	-14.4	2.66 H	306	32.6	21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	111.5 PK			1.07 V	96	105.6	5.9
2	*5610.00	100.3 AV			1.07 V	96	94.4	5.9
3	#5725.00	66.5 PK	68.2	-1.7	1.07 V	96	60.3	6.2
4	11220.00	49.8 PK	74.0	-24.2	2.04 V	199	33.1	16.7
5	11220.00	38.2 AV	54.0	-15.8	2.04 V	199	21.5	16.7
6	#16830.00	53.6 PK	68.2	-14.6	1.34 V	166	32.4	21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.3 PK	74.0	-21.7	1.10 H	203	46.3	6.0
2	5460.00	40.0 AV	54.0	-14.0	1.10 H	203	34.0	6.0
3	#5470.00	50.7 PK	68.2	-17.5	1.10 H	203	44.7	6.0
4	*5690.00	100.0 PK			1.10 H	203	93.9	6.1
5	*5690.00	89.9 AV			1.10 H	203	83.8	6.1
6	#5850.00	55.6 PK	68.2	-12.6	1.10 H	203	49.0	6.6
7	11380.00	49.7 PK	74.0	-24.3	1.57 H	295	32.7	17.0
8	11380.00	38.4 AV	54.0	-15.6	1.57 H	295	21.4	17.0
9	#17070.00	52.7 PK	68.2	-15.5	2.59 H	323	32.3	20.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.3 PK	74.0	-16.7	1.11 V	97	51.3	6.0
2	5460.00	42.3 AV	54.0	-11.7	1.11 V	97	36.3	6.0
3	#5470.00	59.3 PK	68.2	-8.9	1.11 V	97	53.3	6.0
4	*5690.00	111.9 PK			1.11 V	97	105.8	6.1
5	*5690.00	101.7 AV			1.11 V	97	95.6	6.1
6	#5850.00	66.5 PK	68.2	-1.7	1.11 V	97	59.9	6.6
7	11380.00	49.1 PK	74.0	-24.9	2.08 V	182	32.1	17.0
8	11380.00	37.7 AV	54.0	-16.3	2.08 V	182	20.7	17.0
9	#17070.00	53.4 PK	68.2	-14.8	1.33 V	171	33.0	20.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.71	53.3 PK	68.2	-14.9	1.05 H	205	47.3	6.0
2	*5775.00	101.8 PK			1.05 H	205	95.3	6.5
3	*5775.00	91.2 AV			1.05 H	205	84.7	6.5
4	#5931.44	56.0 PK	68.2	-12.2	1.05 H	205	49.6	6.4
5	11550.00	49.7 PK	74.0	-24.3	1.63 H	314	32.7	17.0
6	11550.00	38.7 AV	54.0	-15.3	1.63 H	314	21.7	17.0
7	#17325.00	54.7 PK	68.2	-13.5	2.59 H	298	33.9	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.60	66.7 PK	68.2	-1.5	1.14 V	91	60.7	6.0
2	*5775.00	113.0 PK			1.14 V	91	106.5	6.5
3	*5775.00	101.7 AV			1.14 V	91	95.2	6.5
4	#5929.70	65.8 PK	68.2	-2.4	1.14 V	91	59.4	6.4
5	11550.00	49.3 PK	74.0	-24.7	2.10 V	203	32.3	17.0
6	11550.00	38.1 AV	54.0	-15.9	2.10 V	203	21.1	17.0
7	#17325.00	54.0 PK	68.2	-14.2	1.39 V	151	33.2	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.9 PK	74.0	-18.1	1.27 H	215	49.9	6.0
2	5150.00	44.7 AV	54.0	-9.3	1.27 H	215	38.7	6.0
3	*5250.00	92.9 PK			1.27 H	215	87.4	5.5
4	*5250.00	83.0 AV			1.27 H	215	77.5	5.5
5	5350.00	57.1 PK	74.0	-16.9	1.27 H	215	51.2	5.9
6	5350.00	43.8 AV	54.0	-10.2	1.27 H	215	37.9	5.9
7	#10500.00	48.9 PK	68.2	-19.3	1.67 H	287	33.0	15.9
8	15750.00	58.5 PK	74.0	-15.5	2.57 H	298	41.3	17.2
9	15750.00	45.5 AV	54.0	-8.5	2.57 H	298	28.3	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.1 PK	74.0	-10.9	1.50 V	51	57.1	6.0
2	5150.00	52.1 AV	54.0	-1.9	1.50 V	51	46.1	6.0
3	*5250.00	102.0 PK			1.50 V	51	96.5	5.5
4	*5250.00	91.6 AV			1.50 V	51	86.1	5.5
5	5350.00	67.9 PK	74.0	-6.1	1.50 V	51	62.0	5.9
6	5350.00	51.5 AV	54.0	-2.5	1.50 V	51	45.6	5.9
7	#10500.00	47.8 PK	68.2	-20.4	2.04 V	213	31.9	15.9
8	15750.00	56.1 PK	74.0	-17.9	1.33 V	147	38.9	17.2
9	15750.00	41.7 AV	54.0	-12.3	1.33 V	147	24.5	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.3 PK	74.0	-18.7	1.22 H	204	49.3	6.0
2	5460.00	41.2 AV	54.0	-12.8	1.22 H	204	35.2	6.0
3	#5470.00	51.7 PK	68.2	-16.5	1.22 H	204	45.7	6.0
4	*5570.00	93.0 PK			1.22 H	204	87.1	5.9
5	*5570.00	81.0 AV			1.22 H	204	75.1	5.9
6	#5725.00	56.0 PK	68.2	-12.2	1.22 H	204	49.8	6.2
7	11140.00	50.8 PK	74.0	-23.2	1.61 H	294	34.1	16.7
8	11140.00	38.7 AV	54.0	-15.3	1.61 H	294	22.0	16.7
9	#16710.00	54.6 PK	68.2	-13.6	2.58 H	325	33.1	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	70.3 PK	74.0	-3.7	1.07 V	90	64.3	6.0
2	5460.00	49.5 AV	54.0	-4.5	1.07 V	90	43.5	6.0
3	#5470.00	60.2 PK	68.2	-8.0	1.07 V	90	54.2	6.0
4	*5570.00	104.5 PK			1.07 V	90	98.6	5.9
5	*5570.00	93.0 AV			1.07 V	90	87.1	5.9
6	#5725.00	66.4 PK	68.2	-1.8	1.07 V	90	60.2	6.2
7	11140.00	48.6 PK	74.0	-25.4	2.01 V	207	31.9	16.7
8	11140.00	37.6 AV	54.0	-16.4	2.01 V	207	20.9	16.7
9	#16710.00	53.1 PK	68.2	-15.1	1.31 V	171	31.6	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.4 PK	74.0	-18.6	1.28 H	214	49.4	6.0
2	5150.00	43.1 AV	54.0	-10.9	1.28 H	214	37.1	6.0
3	*5250.00	93.8 PK			1.28 H	214	88.3	5.5
4	*5250.00	82.4 AV			1.28 H	214	76.9	5.5
5	5350.00	56.7 PK	74.0	-17.3	1.28 H	214	50.8	5.9
6	5350.00	44.0 AV	54.0	-10.0	1.28 H	214	38.1	5.9
7	#10500.00	49.3 PK	68.2	-18.9	1.67 H	299	33.4	15.9
8	15750.00	58.3 PK	74.0	-15.7	2.63 H	303	41.1	17.2
9	15750.00	45.2 AV	54.0	-8.8	2.63 H	303	28.0	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.1 PK	74.0	-10.9	1.38 V	96	57.1	6.0
2	5150.00	51.3 AV	54.0	-2.7	1.38 V	96	45.3	6.0
3	*5250.00	101.5 PK			1.38 V	96	96.0	5.5
4	*5250.00	91.8 AV			1.38 V	96	86.3	5.5
5	5350.00	66.1 PK	74.0	-7.9	1.38 V	96	60.2	5.9
6	5350.00	52.2 AV	54.0	-1.8	1.38 V	96	46.3	5.9
7	#10500.00	46.9 PK	68.2	-21.3	2.06 V	208	31.0	15.9
8	15750.00	56.1 PK	74.0	-17.9	1.37 V	163	38.9	17.2
9	15750.00	41.4 AV	54.0	-12.6	1.37 V	163	24.2	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	27 °C, 73 % RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.1 PK	74.0	-18.9	1.24 H	204	49.1	6.0
2	5460.00	41.4 AV	54.0	-12.6	1.24 H	204	35.4	6.0
3	#5470.00	52.6 PK	68.2	-15.6	1.24 H	204	46.6	6.0
4	*5570.00	93.0 PK			1.24 H	204	87.1	5.9
5	*5570.00	80.7 AV			1.24 H	204	74.8	5.9
6	#5725.00	57.8 PK	68.2	-10.4	1.24 H	204	51.6	6.2
7	11140.00	50.7 PK	74.0	-23.3	1.63 H	301	34.0	16.7
8	11140.00	39.1 AV	54.0	-14.9	1.63 H	301	22.4	16.7
9	#16710.00	54.8 PK	68.2	-13.4	2.64 H	327	33.3	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	69.0 PK	74.0	-5.0	1.09 V	94	63.0	6.0
2	5460.00	51.4 AV	54.0	-2.6	1.09 V	94	45.4	6.0
3	#5470.00	66.1 PK	68.2	-2.1	1.09 V	94	60.1	6.0
4	*5570.00	104.1 PK			1.09 V	94	98.2	5.9
5	*5570.00	92.9 AV			1.09 V	94	87.0	5.9
6	#5725.00	65.9 PK	68.2	-2.3	1.09 V	94	59.7	6.2
7	11140.00	49.2 PK	74.0	-24.8	2.05 V	198	32.5	16.7
8	11140.00	38.1 AV	54.0	-15.9	2.05 V	198	21.4	16.7
9	#16710.00	53.5 PK	68.2	-14.7	1.40 V	158	32.0	21.5


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


MODE C_CDD Plot of Band Edge

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 52+26-tone MRU Channel 36

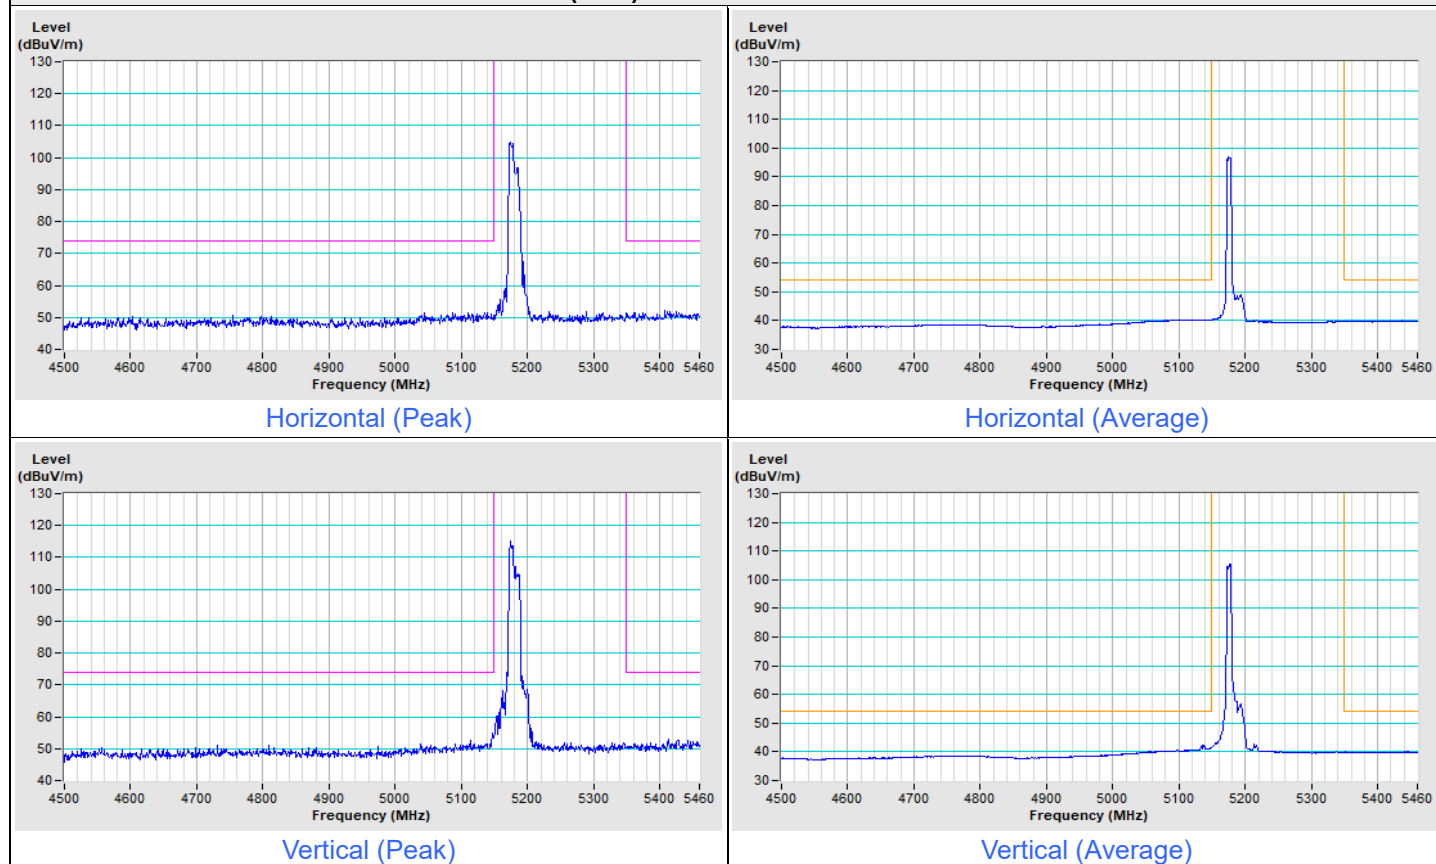


802.11be (EHT) 52+26-tone MRU Channel 64

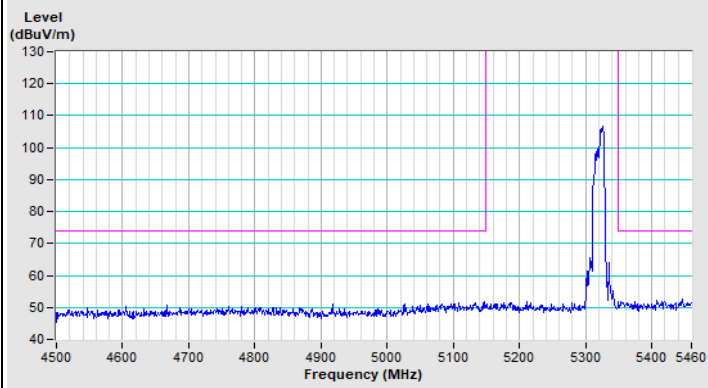


Horizontal (Peak)

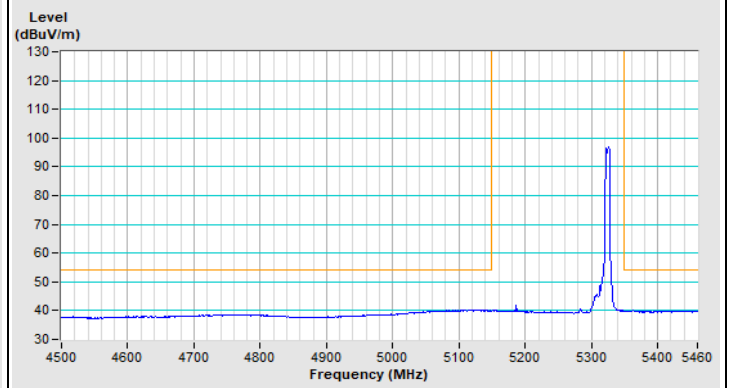

Horizontal (Average)

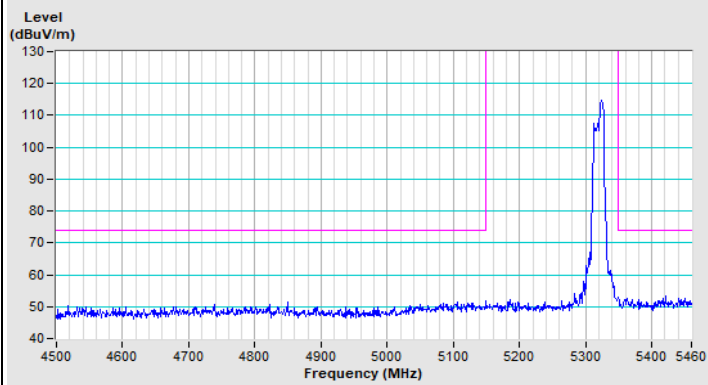


Vertical (Peak)

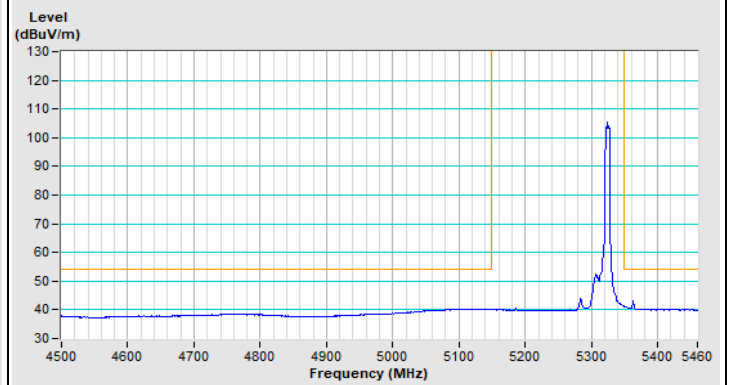

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 52+26-tone MRU Channel 100

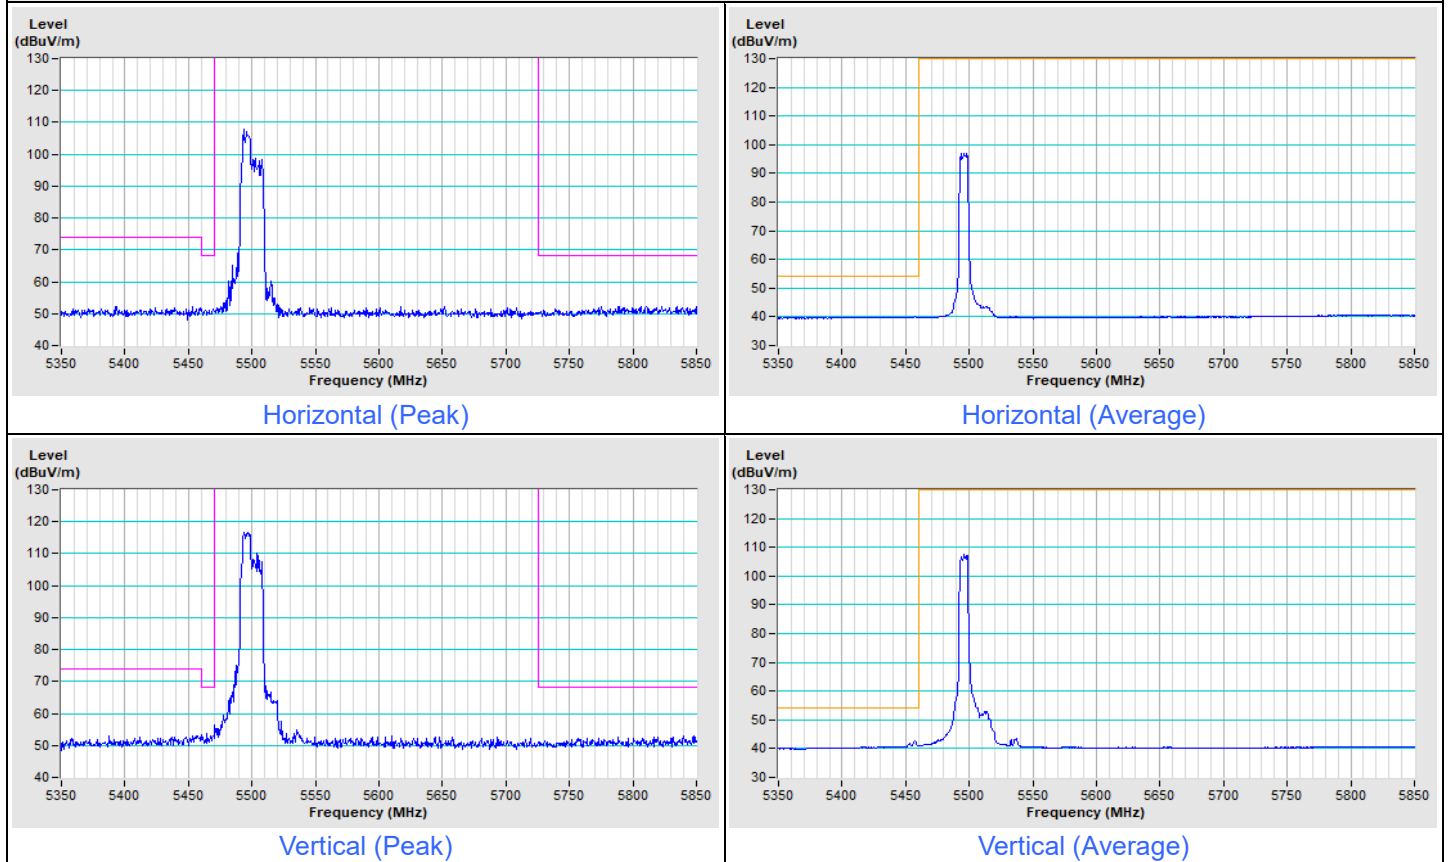


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 52+26-tone MRU Channel 149

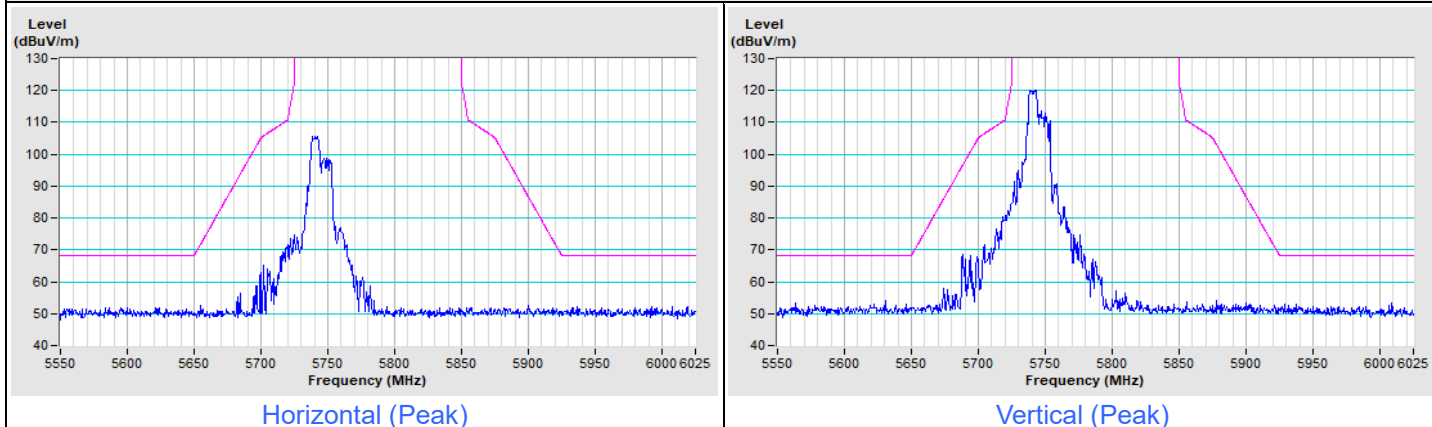


802.11be (EHT) 52+26-tone MRU Channel 165

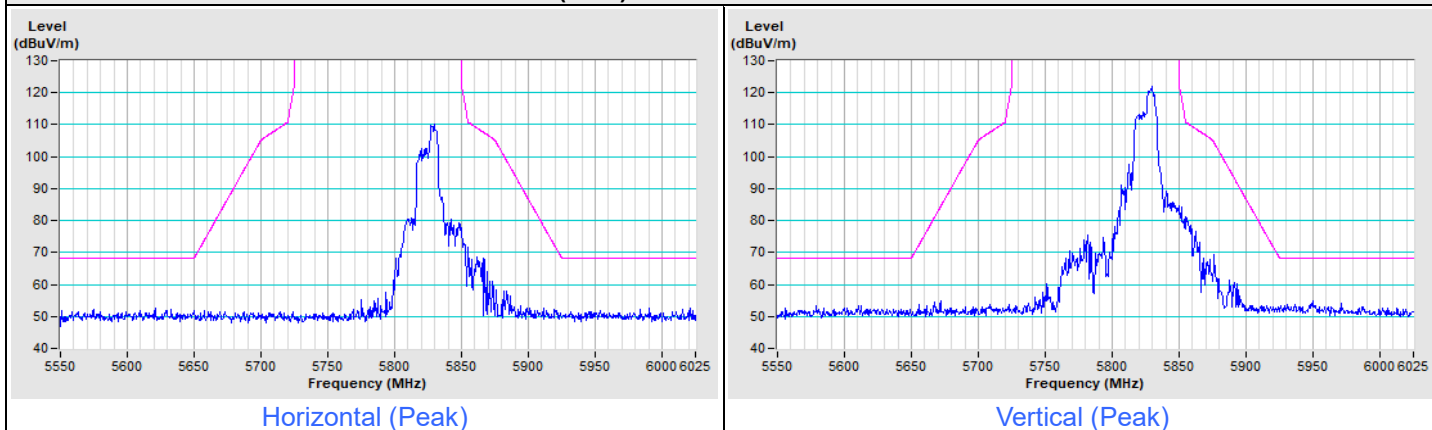


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 106+26-tone MRU Channel 36

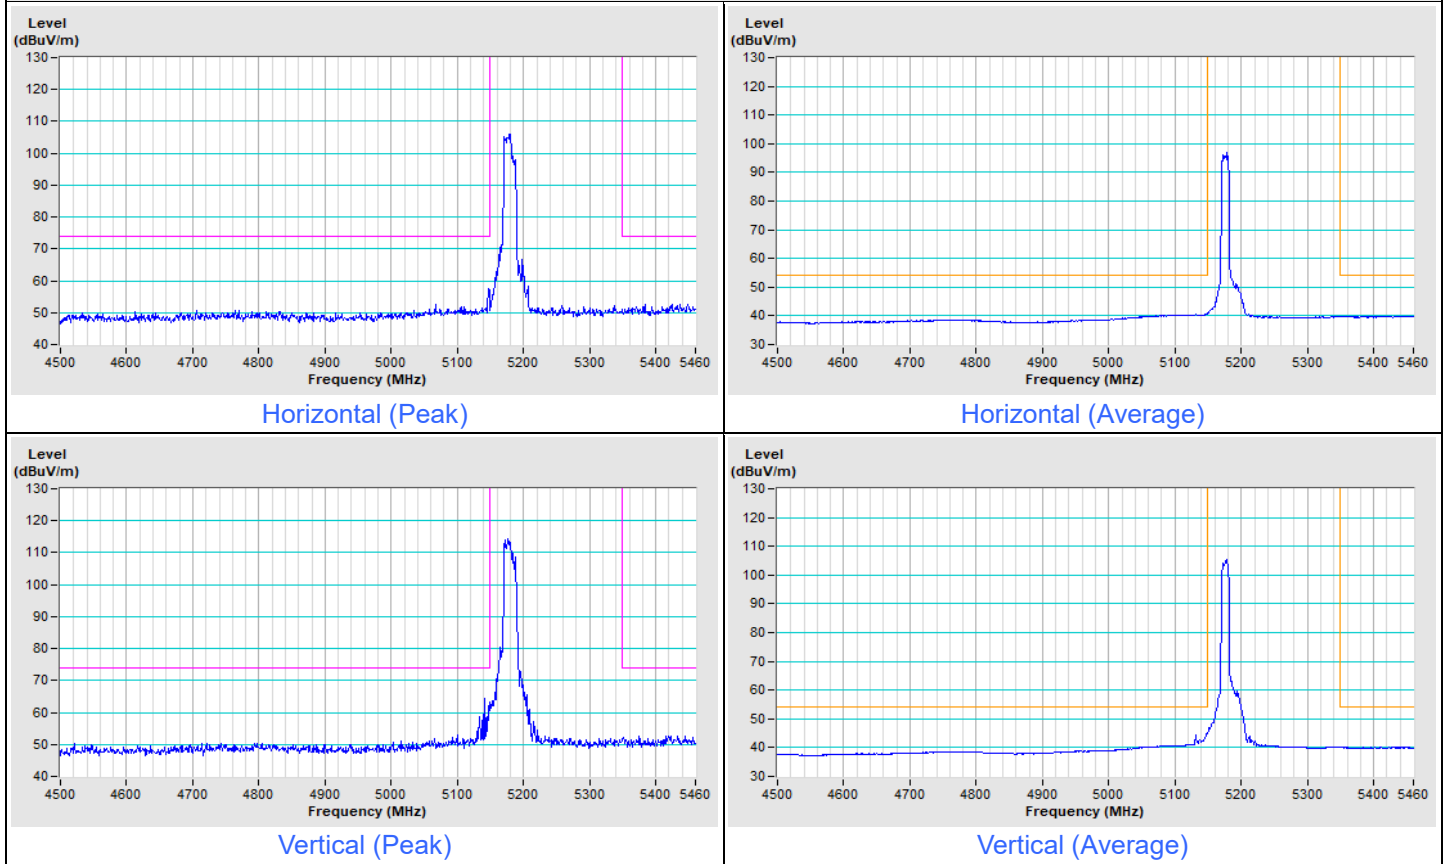


802.11be (EHT) 106+26-tone MRU Channel 64

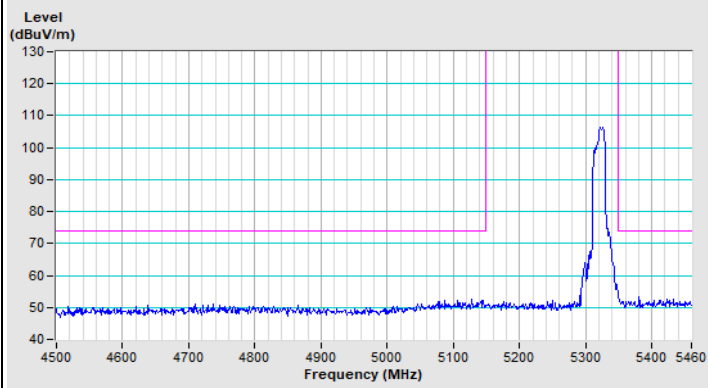


Horizontal (Peak)

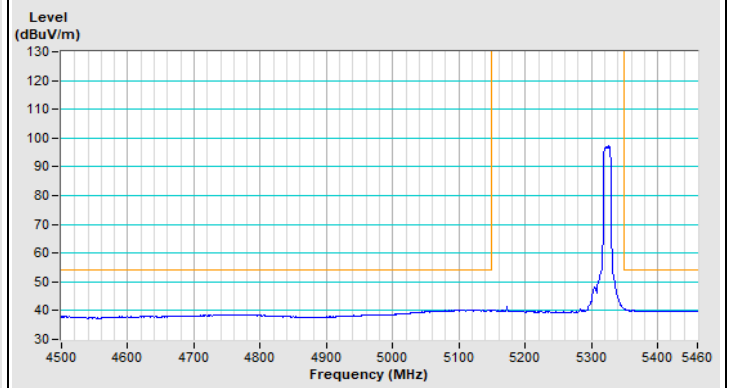

Horizontal (Average)

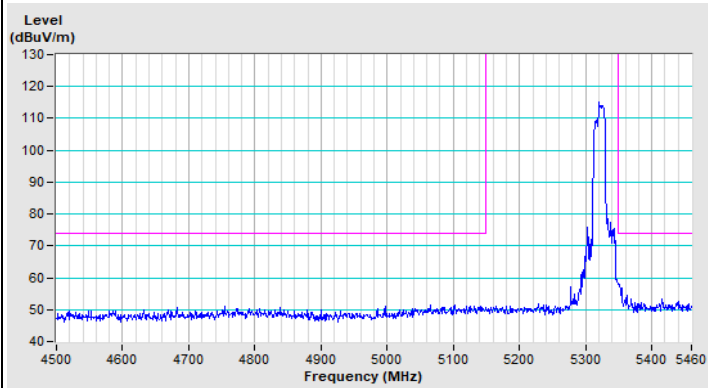


Vertical (Peak)

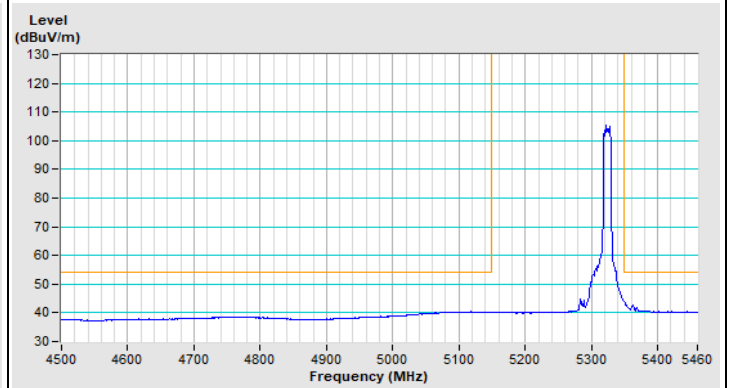

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 106+26-tone MRU Channel 100

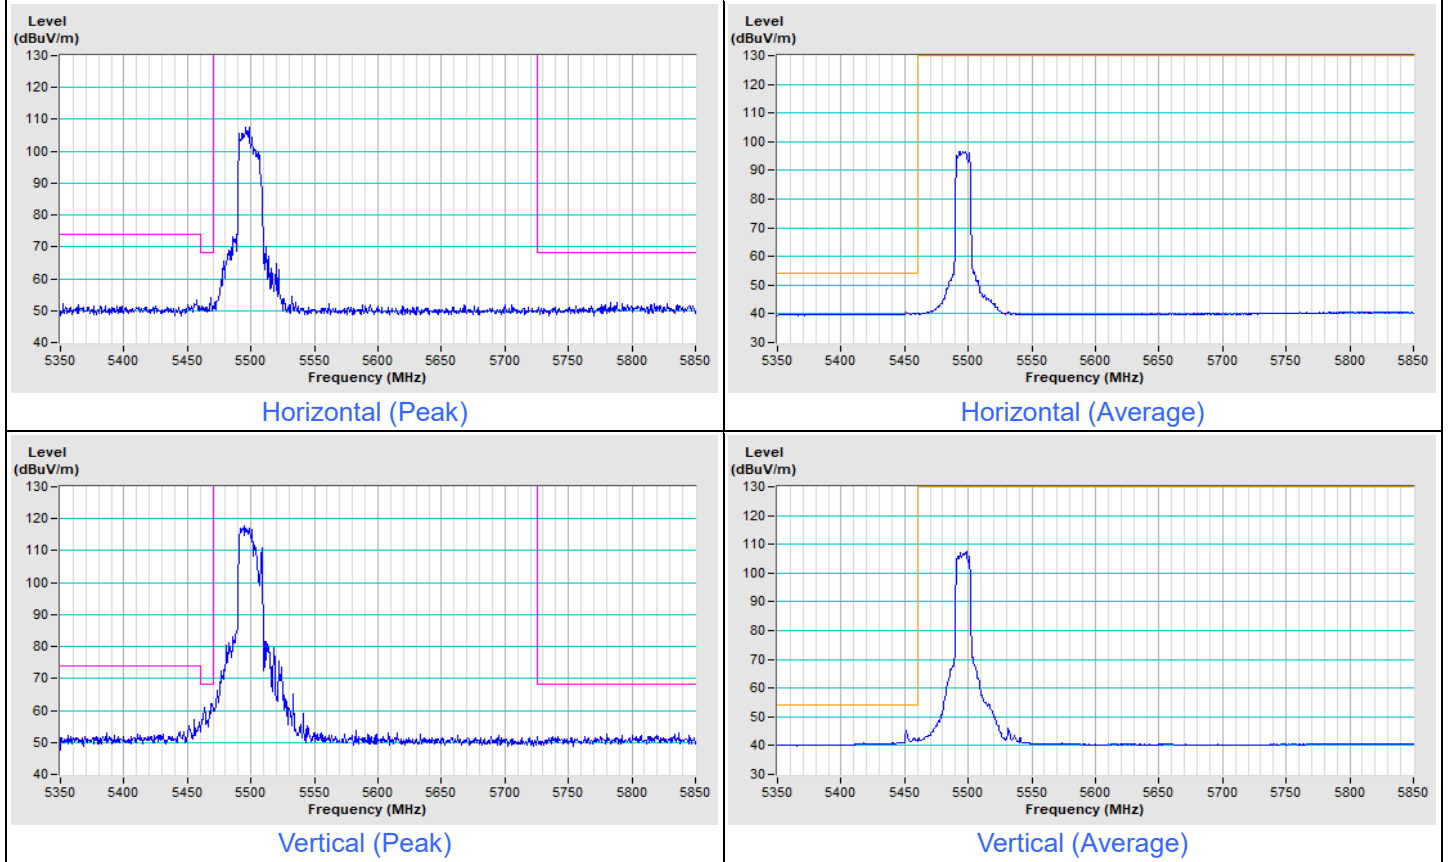


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 106+26-tone MRU Channel 149

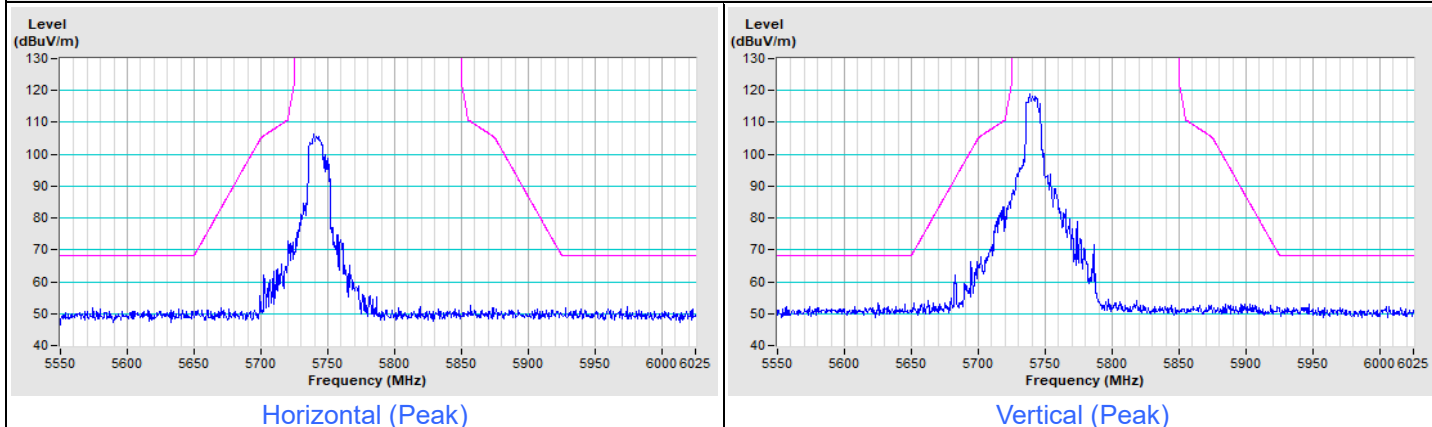


802.11be (EHT) 106+26-tone MRU Channel 165

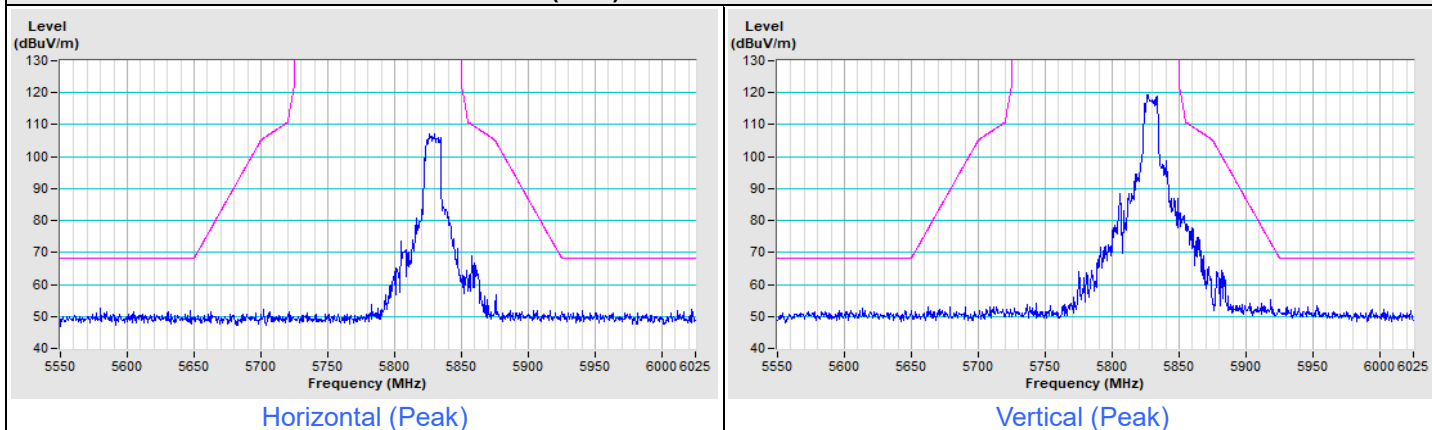


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT) 484+242-tone MRU Channel 42

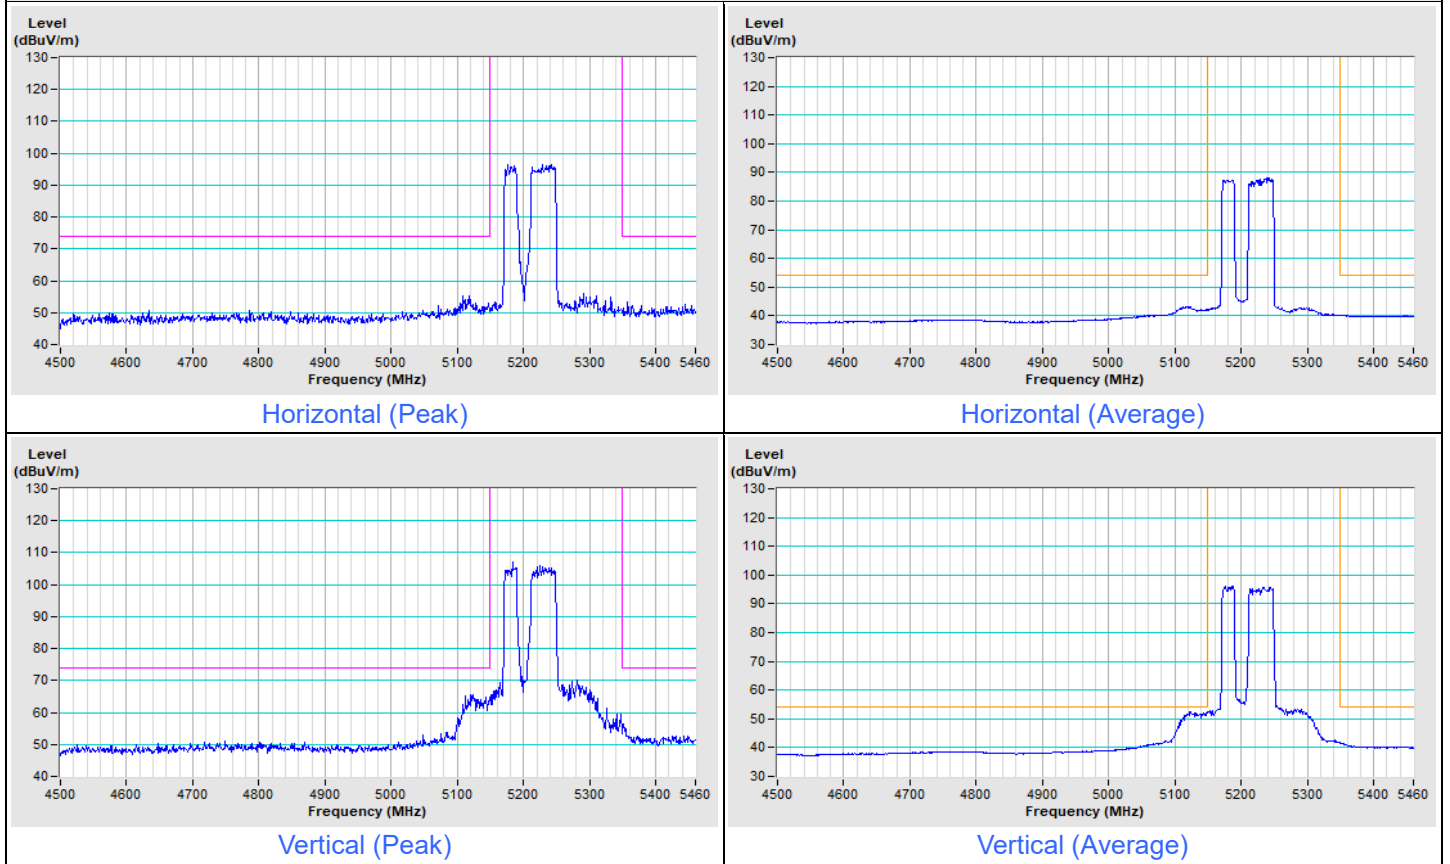


802.11be (EHT) 484+242-tone MRU Channel 58

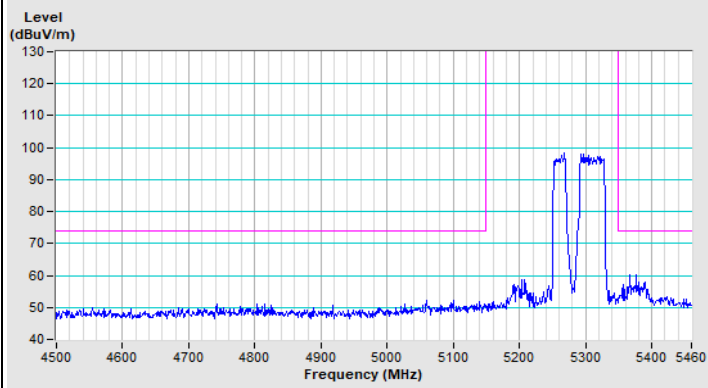


Horizontal (Peak)

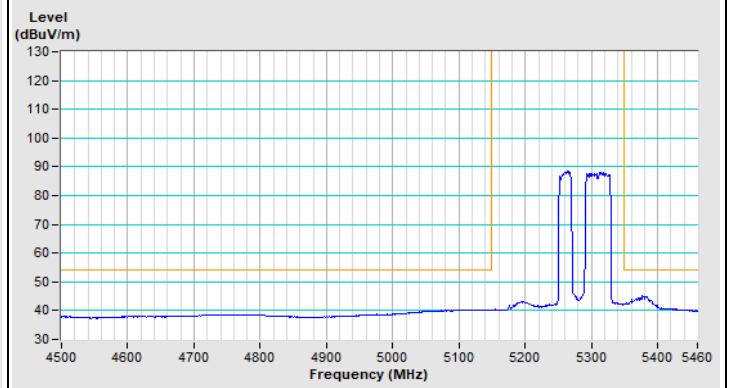

Horizontal (Average)

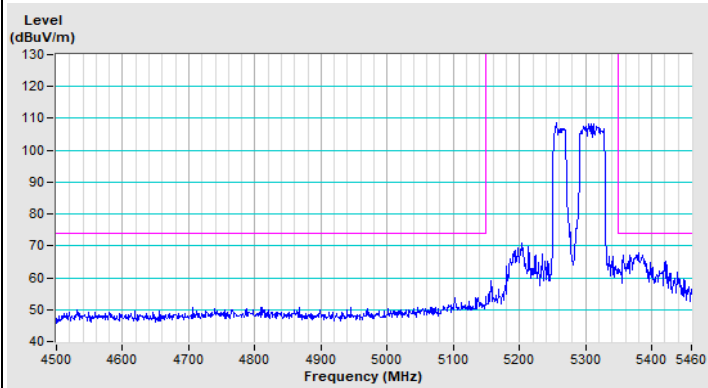


Vertical (Peak)

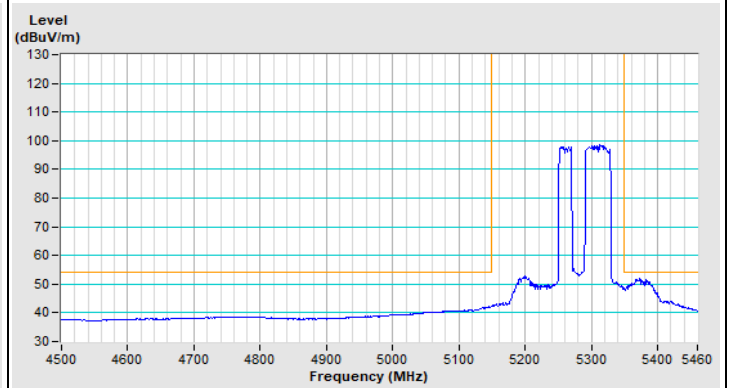

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 484+242-tone MRU Channel 106

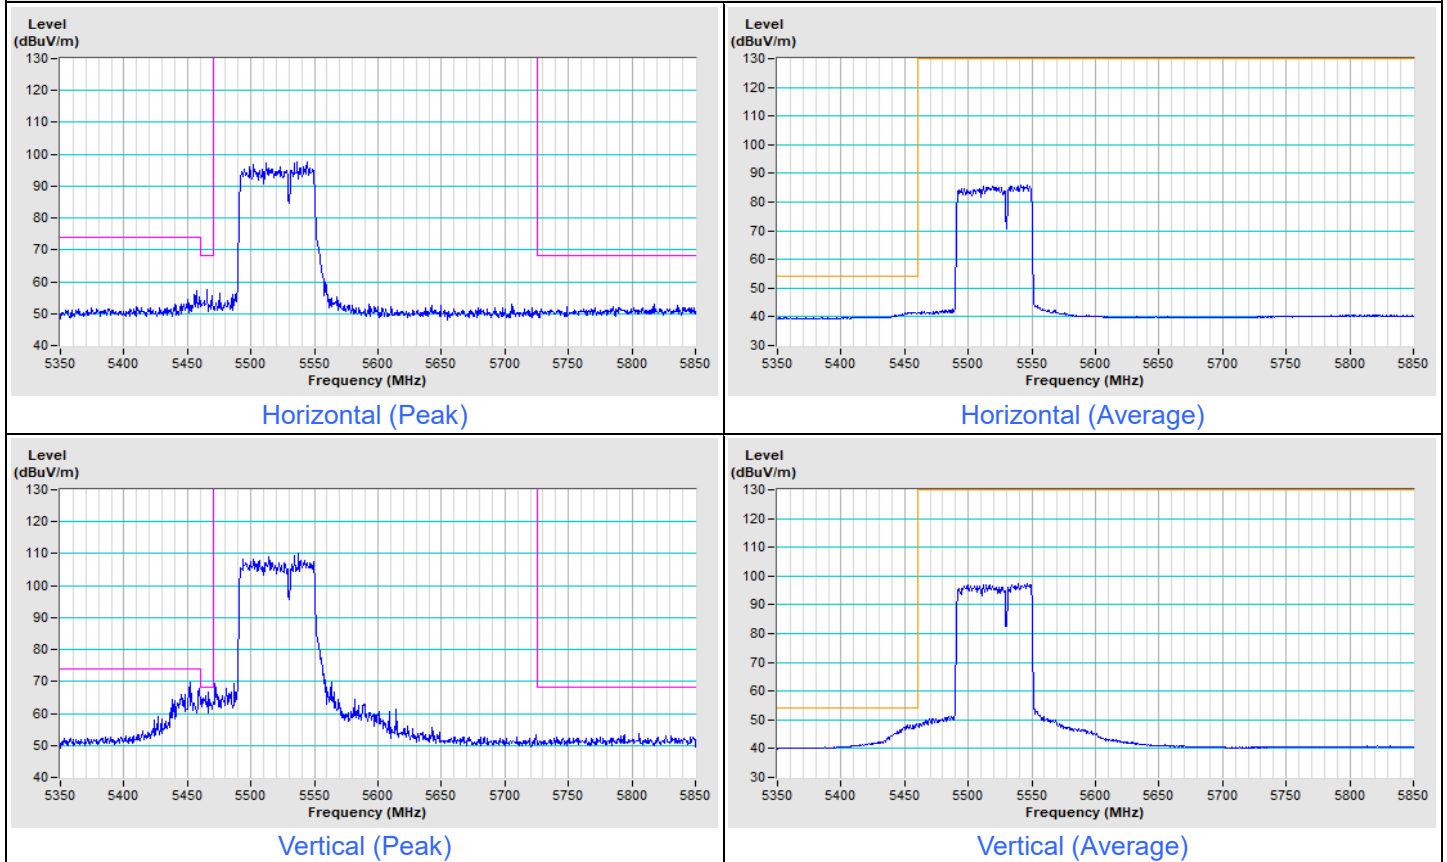


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT) 484+242-tone MRU Channel 155

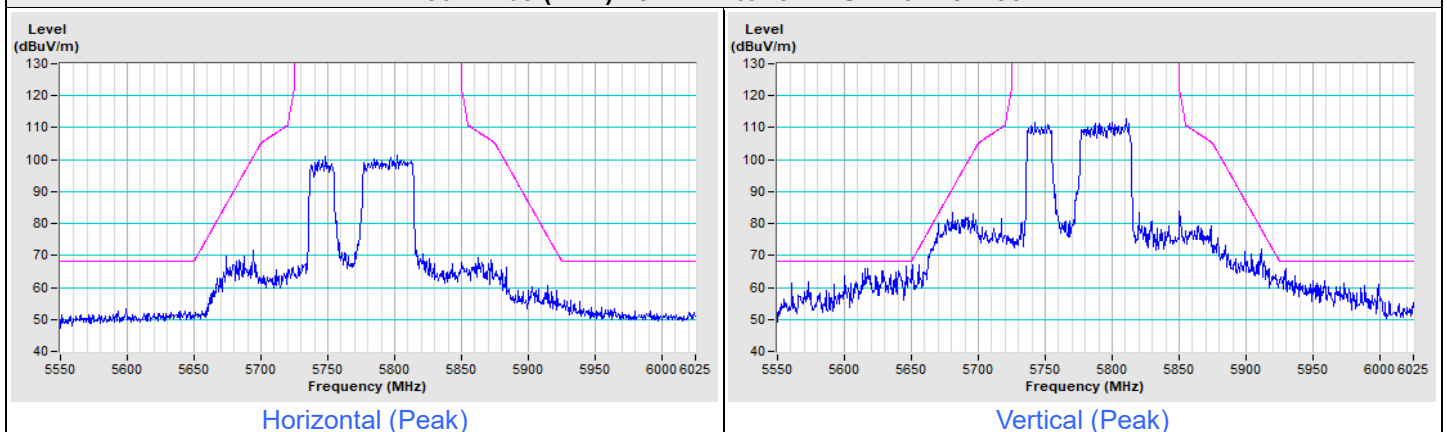


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT) 996+484-tone MRU Channel 50

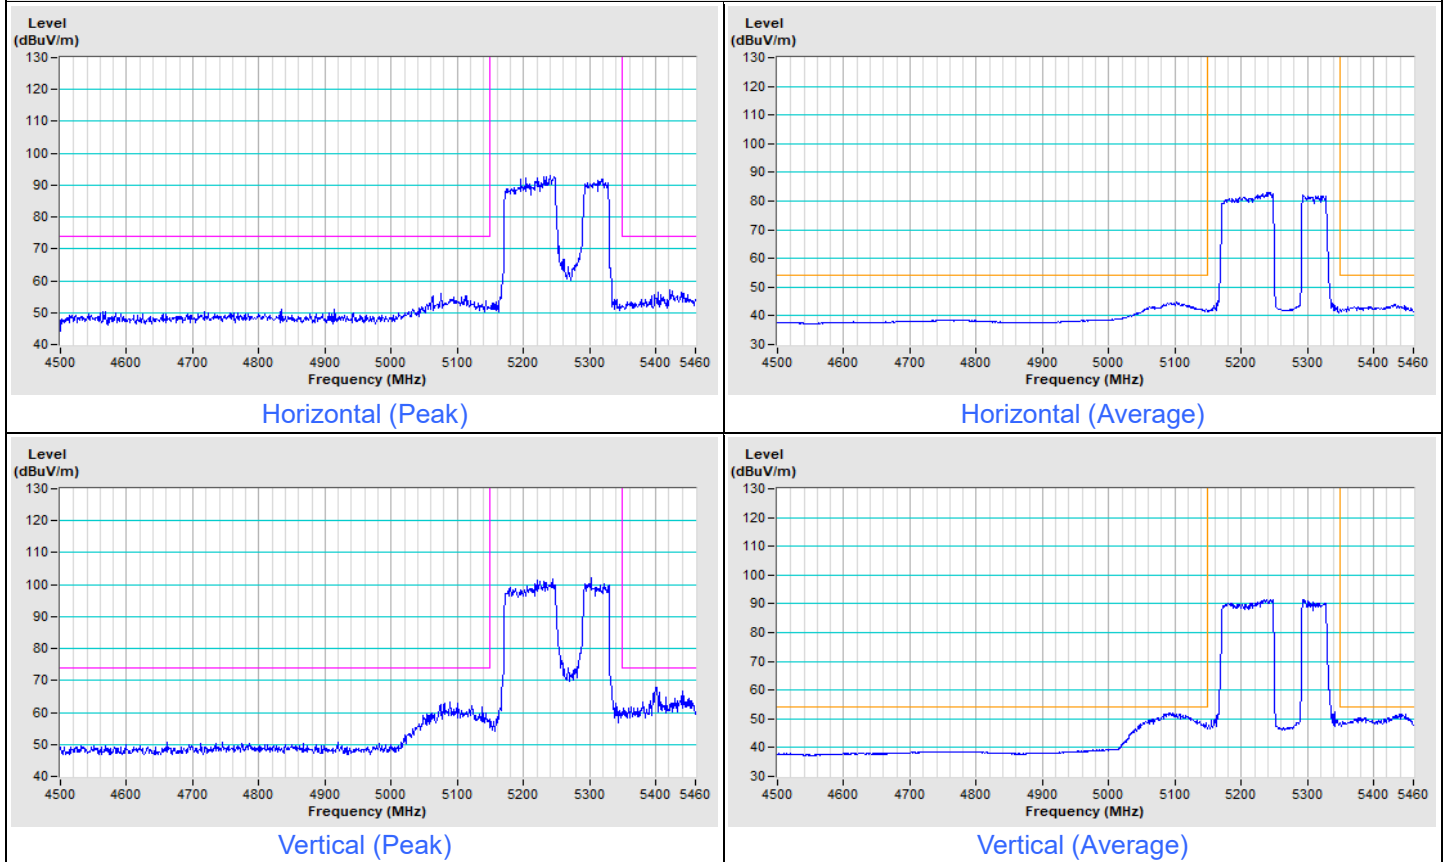


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 996+484-tone MRU Channel 114

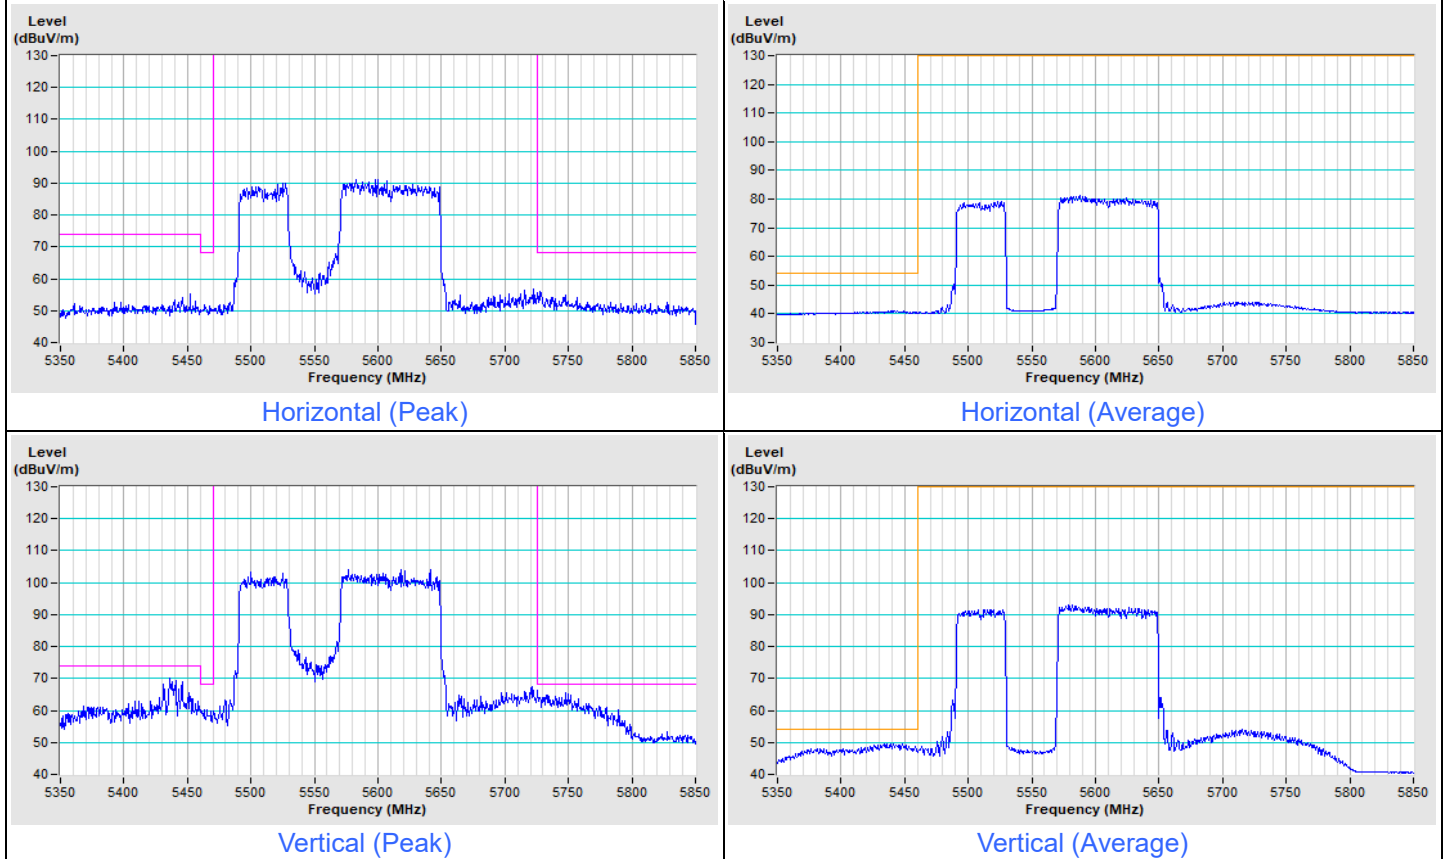


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT) 996+484+242-tone MRU Channel 50

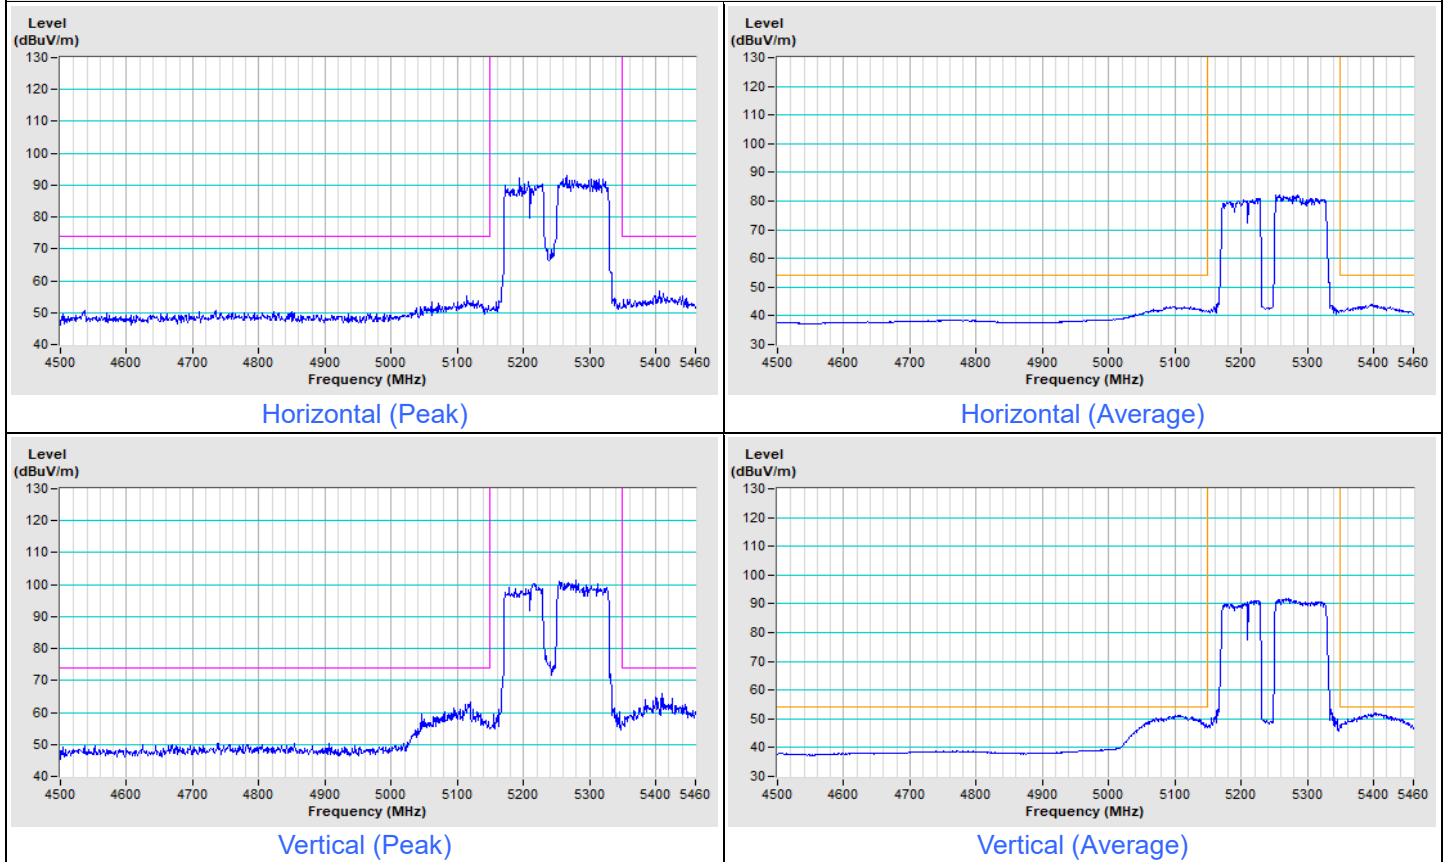

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT) 996+484+242-tone MRU Channel 114

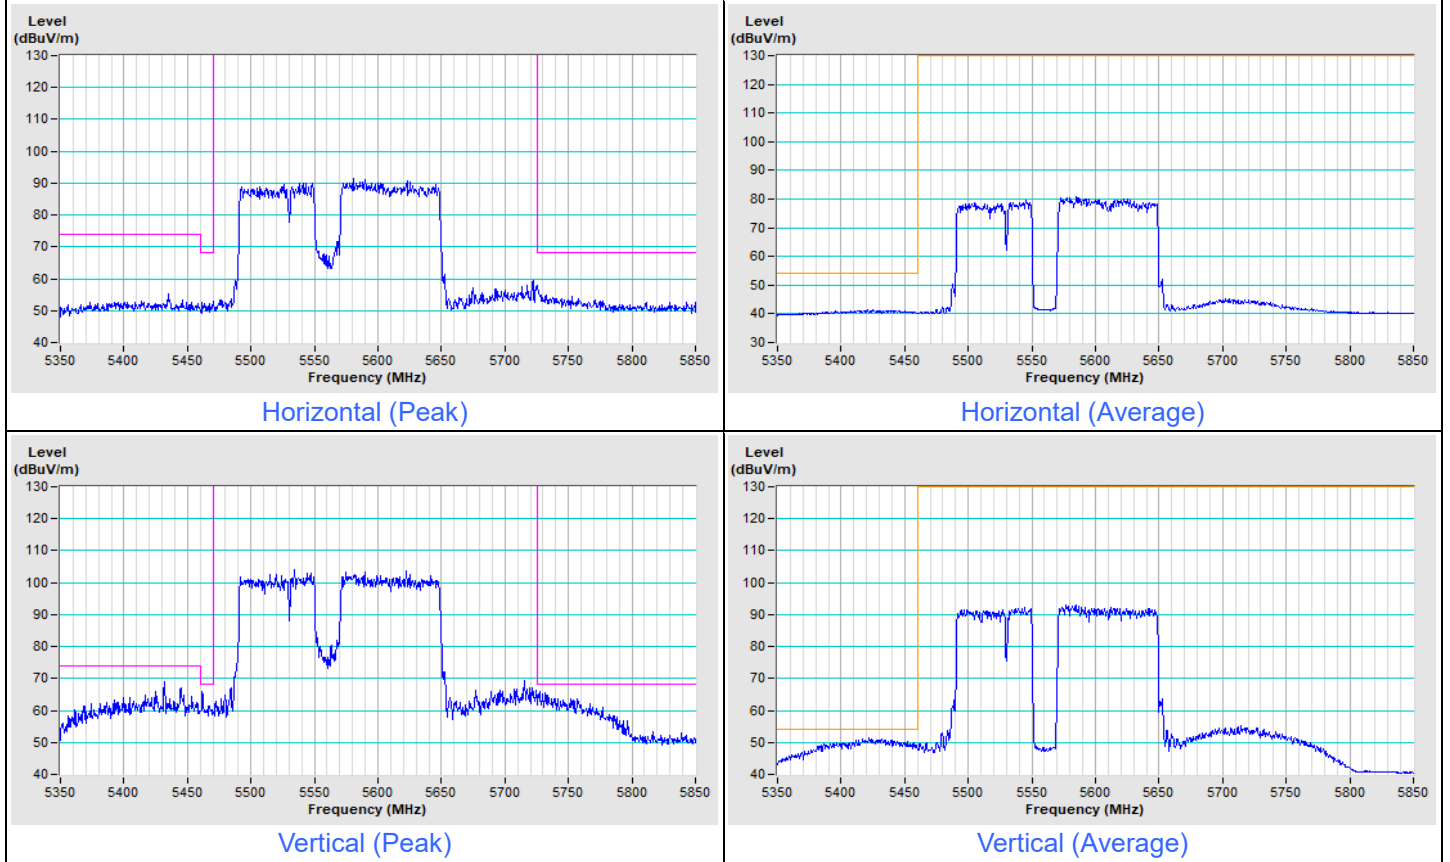

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---