


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	100.5 PK			1.07 V	38	93.1	7.4
2	*6535.00	89.8 AV			1.07 V	38	82.4	7.4
3	#13070.00	50.0 PK	88.2	-38.2	1.09 V	6	34.9	15.1
4	#13070.00	39.0 AV	68.2	-29.2	1.09 V	6	23.9	15.1
5	19605.00	57.1 PK	74.0	-16.9	1.97 V	349	61.9	-4.8
6	19605.00	48.1 AV	54.0	-5.9	1.97 V	349	52.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

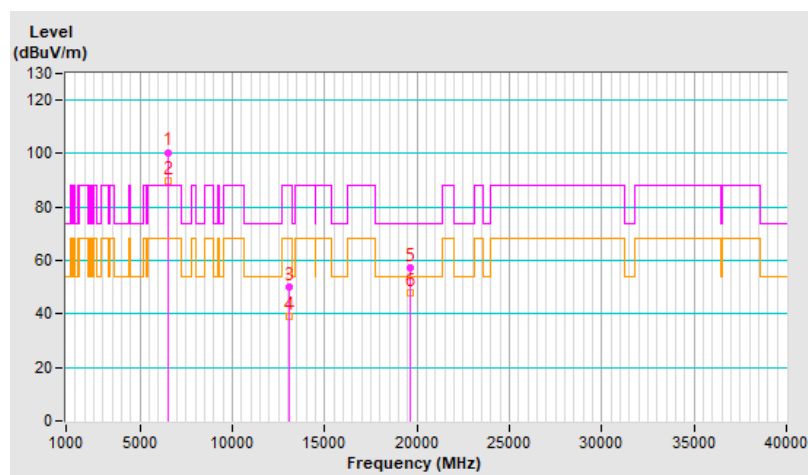


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	95.1 PK			1.12 H	155	86.9	8.2
2	*6855.00	85.9 AV			1.12 H	155	77.7	8.2
3	#13710.00	49.8 PK	88.2	-38.4	1.16 H	24	33.5	16.3
4	#13710.00	38.9 AV	68.2	-29.3	1.16 H	24	22.6	16.3
5	20565.00	56.9 PK	74.0	-17.1	2.03 H	360	60.6	-3.7
6	20565.00	48.4 AV	54.0	-5.6	2.03 H	360	52.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

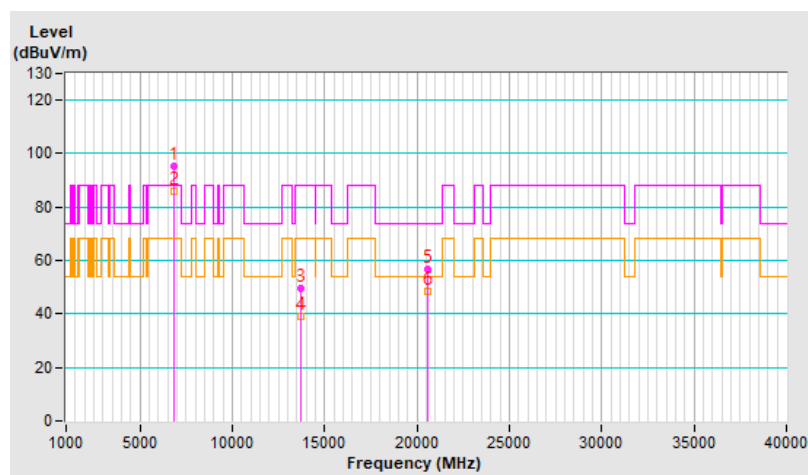


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	101.1 PK			1.02 V	51	92.9	8.2
2	*6855.00	90.6 AV			1.02 V	51	82.4	8.2
3	#13710.00	50.6 PK	88.2	-37.6	1.09 V	34	34.3	16.3
4	#13710.00	39.2 AV	68.2	-29.0	1.09 V	34	22.9	16.3
5	20565.00	57.0 PK	74.0	-17.0	2.03 V	360	60.7	-3.7
6	20565.00	48.4 AV	54.0	-5.6	2.03 V	360	52.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

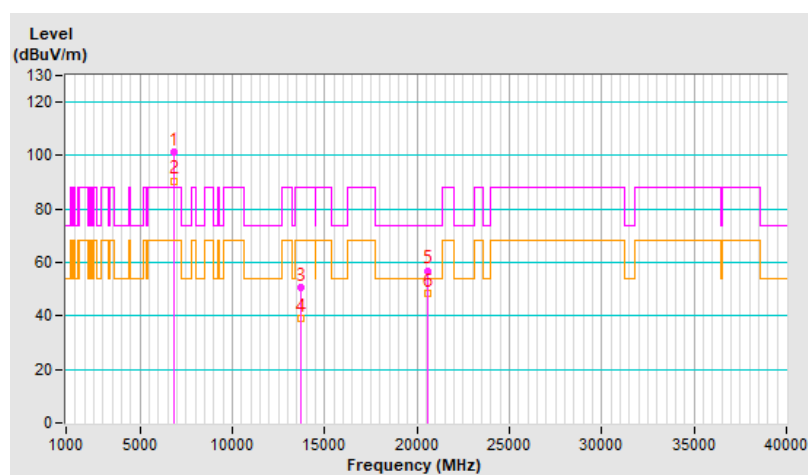


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	95.5 PK			1.07 H	158	87.2	8.3
2	*6875.00	86.1 AV			1.07 H	158	77.8	8.3
3	#13750.00	49.8 PK	88.2	-38.4	1.13 H	35	33.3	16.5
4	#13750.00	38.7 AV	68.2	-29.5	1.13 H	35	22.2	16.5
5	20625.00	57.9 PK	74.0	-16.1	1.96 H	337	61.6	-3.7
6	20625.00	48.8 AV	54.0	-5.2	1.96 H	337	52.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

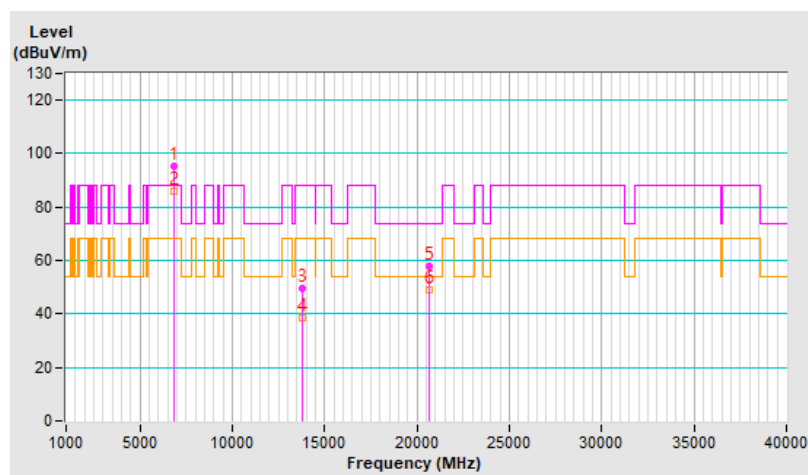


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.7 PK			1.09 V	67	92.4	8.3
2	*6875.00	90.2 AV			1.09 V	67	81.9	8.3
3	#13750.00	50.5 PK	88.2	-37.7	1.07 V	24	34.0	16.5
4	#13750.00	39.0 AV	68.2	-29.2	1.07 V	24	22.5	16.5
5	20625.00	57.1 PK	74.0	-16.9	2.00 V	360	60.8	-3.7
6	20625.00	48.0 AV	54.0	-6.0	2.00 V	360	51.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

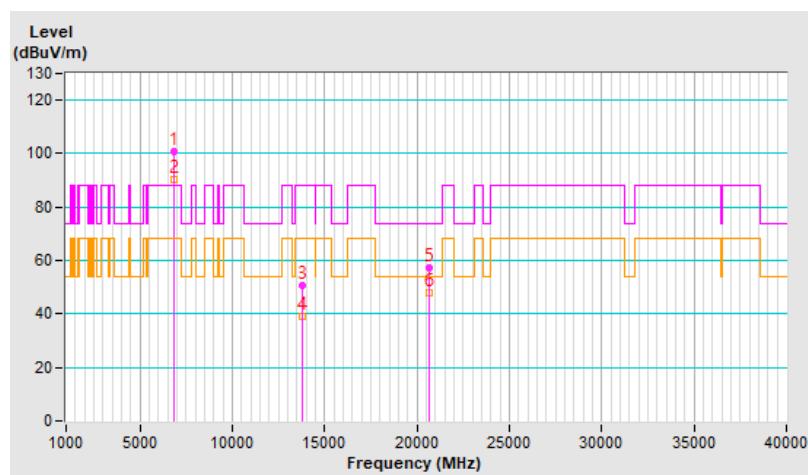


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.0 PK			2.38 H	212	92.0	10.0
2	*7115.00	91.0 AV			2.38 H	212	81.0	10.0
3	#7125.00	60.8 PK	88.2	-27.4	2.38 H	212	50.7	10.1
4	#7125.00	51.2 AV	68.2	-17.0	2.38 H	212	41.1	10.1
5	#14230.00	49.4 PK	88.2	-38.8	1.11 H	34	30.7	18.7
6	#14230.00	38.6 AV	68.2	-29.6	1.11 H	34	19.9	18.7
7	21345.00	57.3 PK	74.0	-16.7	2.06 H	348	59.8	-2.5
8	21345.00	48.3 AV	54.0	-5.7	2.06 H	348	50.8	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

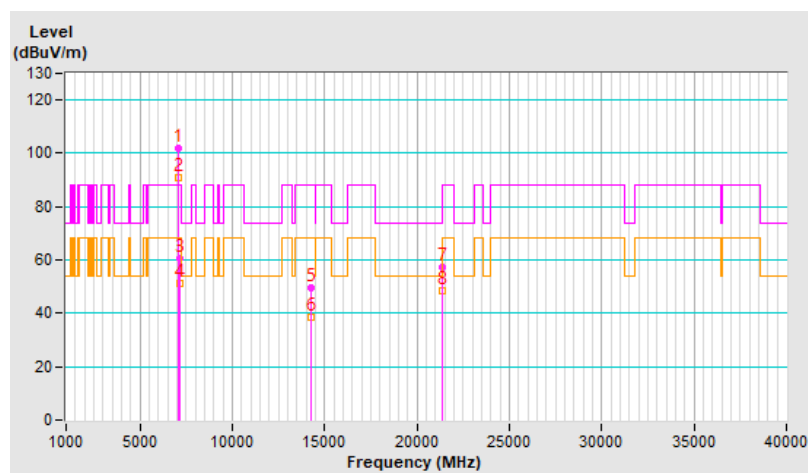


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.5 PK			1.88 V	328	87.5	10.0
2	*7115.00	87.3 AV			1.88 V	328	77.3	10.0
3	#7125.00	55.8 PK	88.2	-32.4	1.88 V	328	45.7	10.1
4	#7125.00	48.2 AV	68.2	-20.0	1.88 V	328	38.1	10.1
5	#14230.00	50.3 PK	88.2	-37.9	1.10 V	15	31.6	18.7
6	#14230.00	39.1 AV	68.2	-29.1	1.10 V	15	20.4	18.7
7	21345.00	56.7 PK	74.0	-17.3	1.95 V	360	59.2	-2.5
8	21345.00	47.9 AV	54.0	-6.1	1.95 V	360	50.4	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

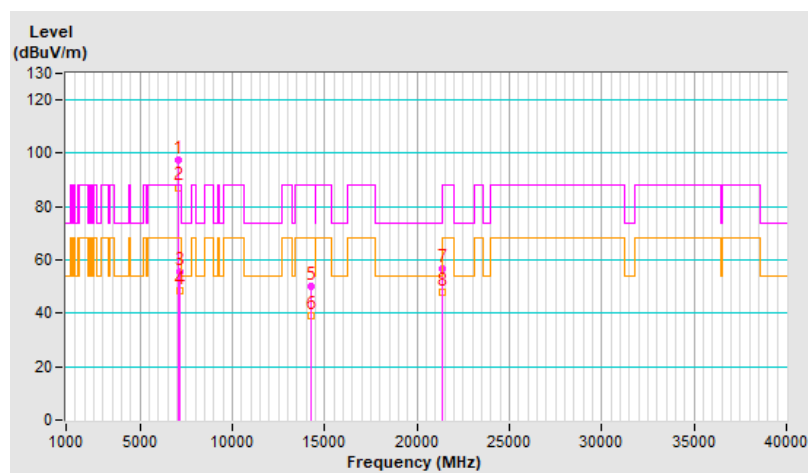


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.26 H	157	46.3	5.6
2	#5925.00	40.1 AV	68.2	-28.1	1.26 H	157	34.5	5.6
3	*5985.00	96.4 PK			1.26 H	157	90.9	5.5
4	*5985.00	85.6 AV			1.26 H	157	80.1	5.5
5	11970.00	48.9 PK	74.0	-25.1	1.08 H	12	34.4	14.5
6	11970.00	38.1 AV	54.0	-15.9	1.08 H	12	23.6	14.5
7	17955.00	58.0 PK	74.0	-16.0	2.06 H	344	29.7	28.3
8	17955.00	49.2 AV	54.0	-4.8	2.06 H	344	20.9	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

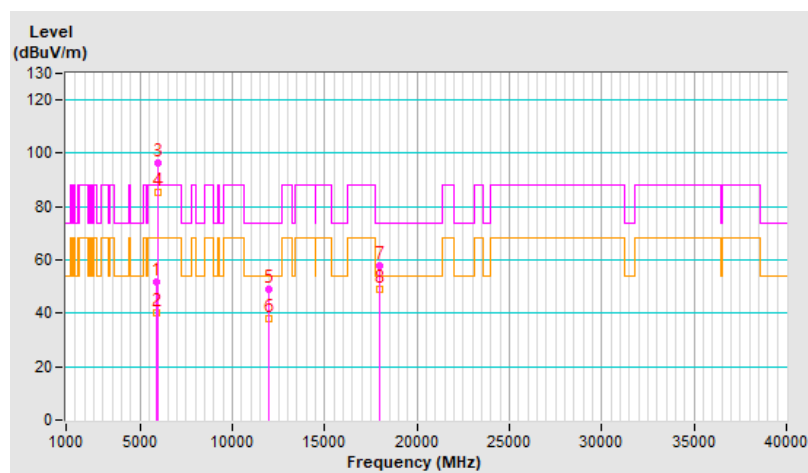


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.6 PK	88.2	-35.6	1.02 V	48	47.0	5.6
2	#5925.00	40.8 AV	68.2	-27.4	1.02 V	48	35.2	5.6
3	*5985.00	100.3 PK			1.02 V	48	94.8	5.5
4	*5985.00	89.6 AV			1.02 V	48	84.1	5.5
5	11970.00	49.9 PK	74.0	-24.1	1.14 V	14	35.4	14.5
6	11970.00	38.5 AV	54.0	-15.5	1.14 V	14	24.0	14.5
7	17955.00	57.5 PK	74.0	-16.5	2.02 V	360	29.2	28.3
8	17955.00	48.5 AV	54.0	-5.5	2.02 V	360	20.2	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

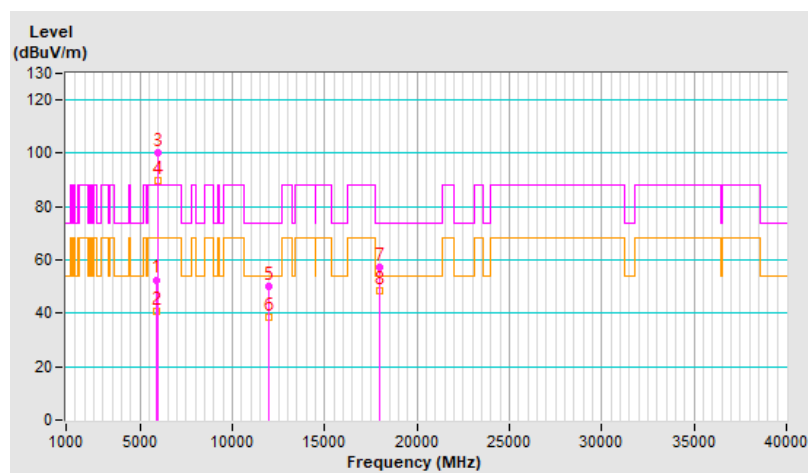


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	96.6 PK			1.22 H	159	90.0	6.6
2	*6385.00	85.8 AV			1.22 H	159	79.2	6.6
3	#12770.00	49.6 PK	88.2	-38.6	1.12 H	19	34.7	14.9
4	#12770.00	38.4 AV	68.2	-29.8	1.12 H	19	23.5	14.9
5	19155.00	57.4 PK	74.0	-16.6	1.97 H	356	62.1	-4.7
6	19155.00	48.5 AV	54.0	-5.5	1.97 H	356	53.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

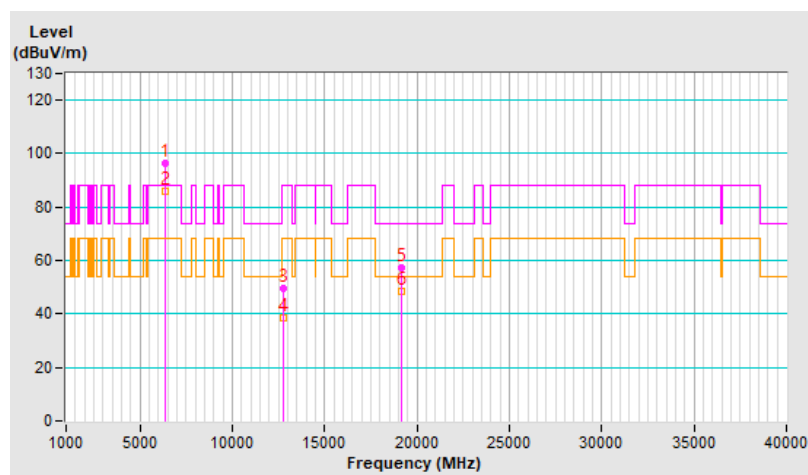


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	100.2 PK			1.01 V	59	93.6	6.6
2	*6385.00	89.6 AV			1.01 V	59	83.0	6.6
3	#12770.00	50.1 PK	88.2	-38.1	1.11 V	6	35.2	14.9
4	#12770.00	38.9 AV	68.2	-29.3	1.11 V	6	24.0	14.9
5	19155.00	57.1 PK	74.0	-16.9	1.94 V	359	61.8	-4.7
6	19155.00	48.5 AV	54.0	-5.5	1.94 V	359	53.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

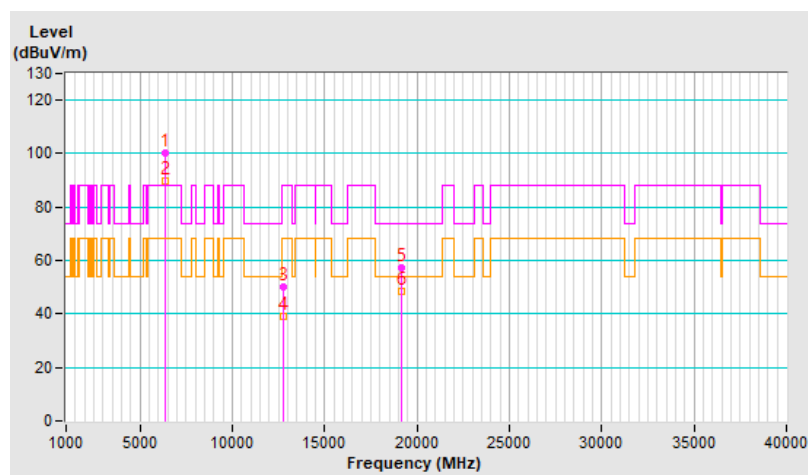


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	96.6 PK			1.26 H	158	89.6	7.0
2	*6465.00	85.7 AV			1.26 H	158	78.7	7.0
3	#12930.00	49.5 PK	88.2	-38.7	1.14 H	15	34.3	15.2
4	#12930.00	38.6 AV	68.2	-29.6	1.14 H	15	23.4	15.2
5	19395.00	57.7 PK	74.0	-16.3	1.96 H	347	62.2	-4.5
6	19395.00	49.0 AV	54.0	-5.0	1.96 H	347	53.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

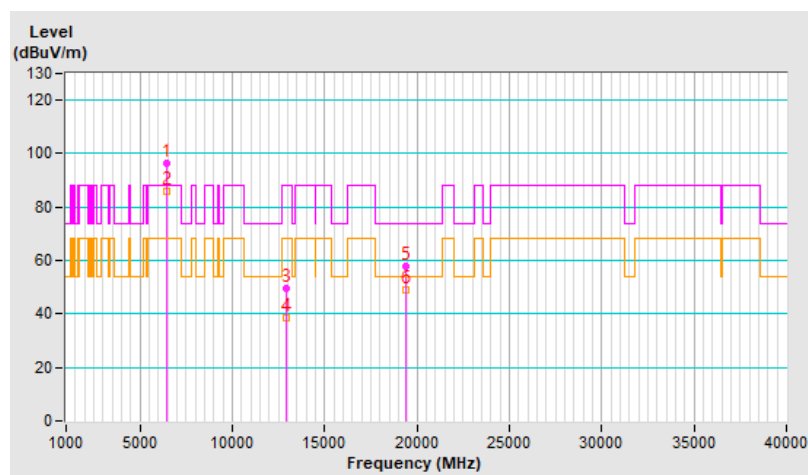


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	99.9 PK			1.04 V	59	92.9	7.0
2	*6465.00	89.4 AV			1.04 V	59	82.4	7.0
3	#12930.00	50.3 PK	88.2	-37.9	1.16 V	28	35.1	15.2
4	#12930.00	39.2 AV	68.2	-29.0	1.16 V	28	24.0	15.2
5	19395.00	56.9 PK	74.0	-17.1	1.94 V	354	61.4	-4.5
6	19395.00	47.9 AV	54.0	-6.1	1.94 V	354	52.4	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

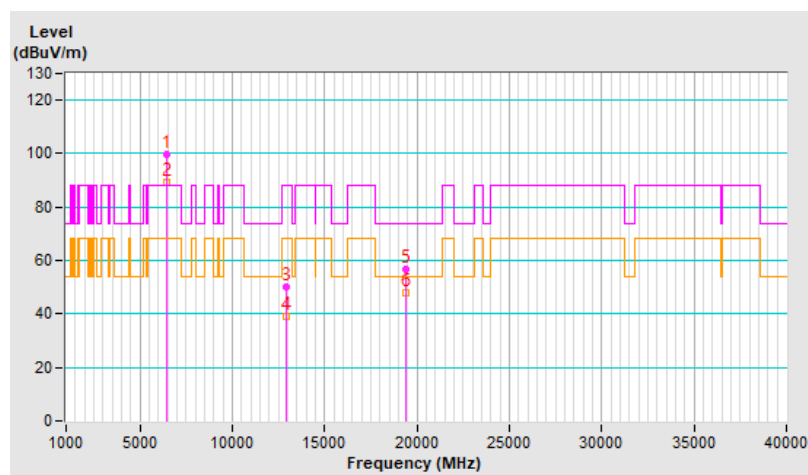


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	96.0 PK			1.22 H	170	88.6	7.4
2	*6545.00	85.1 AV			1.22 H	170	77.7	7.4
3	#13090.00	49.2 PK	88.2	-39.0	1.15 H	15	34.0	15.2
4	#13090.00	38.1 AV	68.2	-30.1	1.15 H	15	22.9	15.2
5	19635.00	58.0 PK	74.0	-16.0	2.02 H	352	62.7	-4.7
6	19635.00	49.1 AV	54.0	-4.9	2.02 H	352	53.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

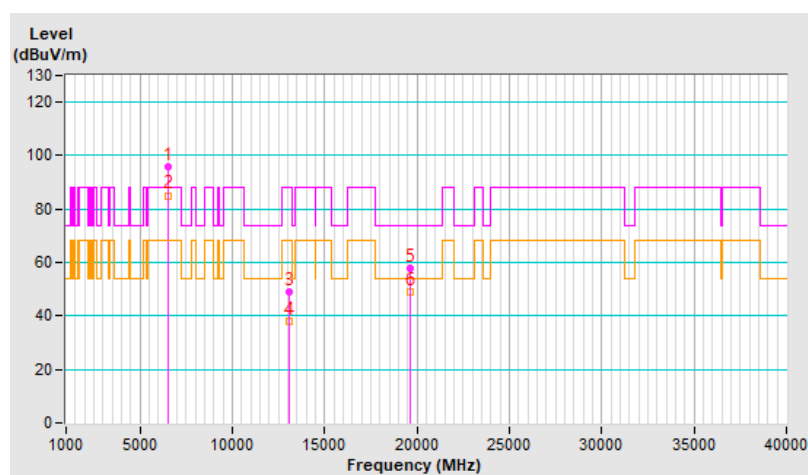


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	99.8 PK			1.00 V	33	92.4	7.4
2	*6545.00	89.3 AV			1.00 V	33	81.9	7.4
3	#13090.00	50.8 PK	88.2	-37.4	1.08 V	18	35.6	15.2
4	#13090.00	39.3 AV	68.2	-28.9	1.08 V	18	24.1	15.2
5	19635.00	57.4 PK	74.0	-16.6	2.01 V	346	62.1	-4.7
6	19635.00	48.4 AV	54.0	-5.6	2.01 V	346	53.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

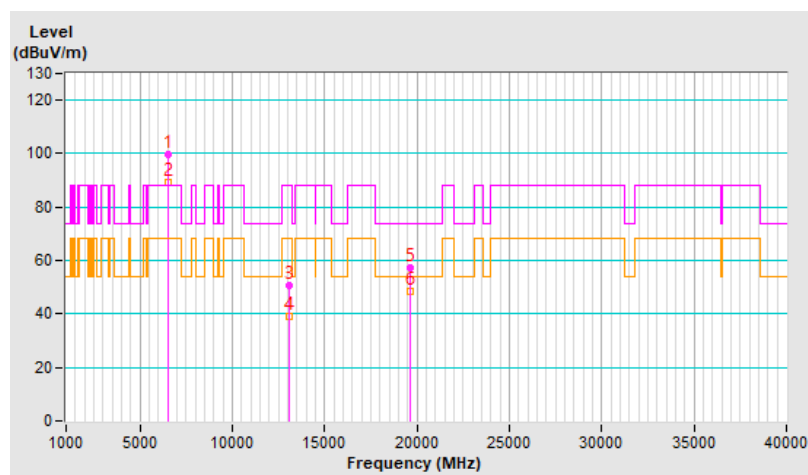


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	96.4 PK			1.22 H	143	88.6	7.8
2	*6625.00	85.7 AV			1.22 H	143	77.9	7.8
3	13250.00	50.4 PK	74.0	-23.6	1.12 H	40	35.0	15.4
4	13250.00	39.1 AV	54.0	-14.9	1.12 H	40	23.7	15.4
5	19875.00	57.8 PK	74.0	-16.2	1.95 H	349	62.3	-4.5
6	19875.00	48.7 AV	54.0	-5.3	1.95 H	349	53.2	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

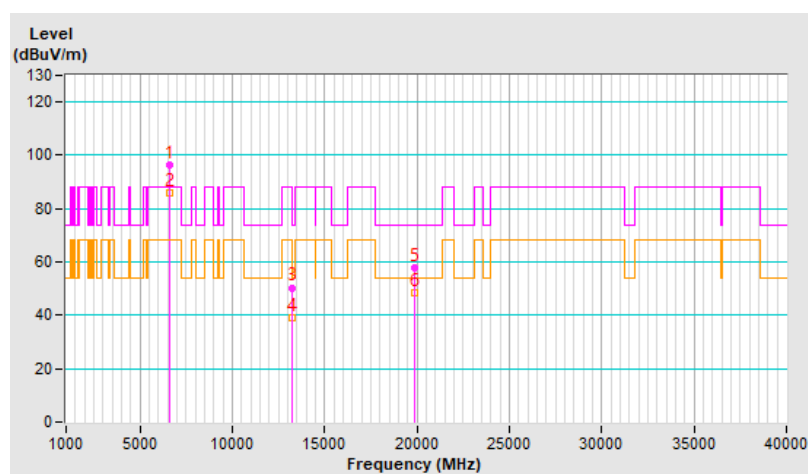


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	100.1 PK			1.03 V	38	92.3	7.8
2	*6625.00	89.3 AV			1.03 V	38	81.5	7.8
3	13250.00	49.4 PK	74.0	-24.6	1.14 V	14	34.0	15.4
4	13250.00	38.3 AV	54.0	-15.7	1.14 V	14	22.9	15.4
5	19875.00	56.8 PK	74.0	-17.2	1.96 V	353	61.3	-4.5
6	19875.00	47.9 AV	54.0	-6.1	1.96 V	353	52.4	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

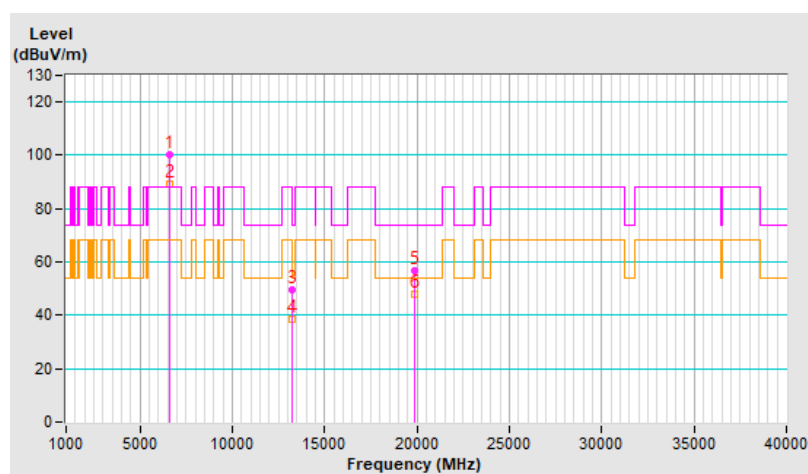


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	96.3 PK			1.29 H	160	88.6	7.7
2	*6785.00	85.4 AV			1.29 H	160	77.7	7.7
3	#13570.00	50.2 PK	88.2	-38.0	1.10 H	26	34.5	15.7
4	#13570.00	39.1 AV	68.2	-29.1	1.10 H	26	23.4	15.7
5	20355.00	57.8 PK	74.0	-16.2	2.05 H	350	61.6	-3.8
6	20355.00	49.1 AV	54.0	-4.9	2.05 H	350	52.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

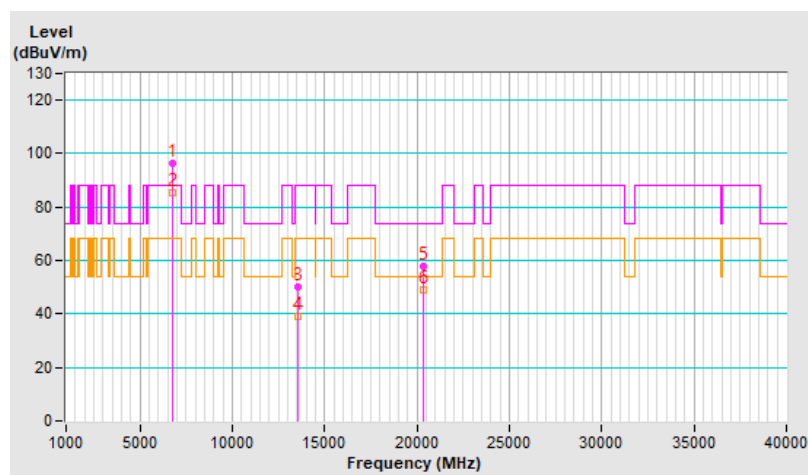


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	100.4 PK			1.07 V	59	92.7	7.7
2	*6785.00	89.8 AV			1.07 V	59	82.1	7.7
3	#13570.00	50.5 PK	88.2	-37.7	1.11 V	6	34.8	15.7
4	#13570.00	39.1 AV	68.2	-29.1	1.11 V	6	23.4	15.7
5	20355.00	57.0 PK	74.0	-17.0	1.99 V	360	60.8	-3.8
6	20355.00	48.0 AV	54.0	-6.0	1.99 V	360	51.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

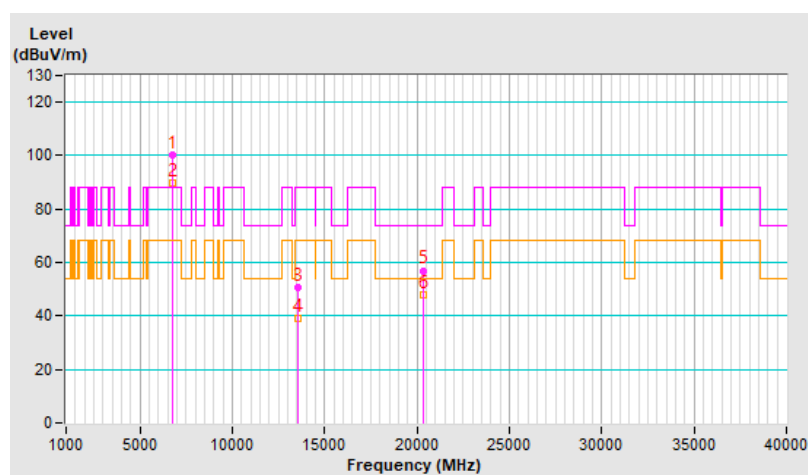


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	96.0 PK			1.23 H	172	87.8	8.2
2	*6865.00	85.1 AV			1.23 H	172	76.9	8.2
3	#13730.00	50.2 PK	88.2	-38.0	1.08 H	33	33.8	16.4
4	#13730.00	38.8 AV	68.2	-29.4	1.08 H	33	22.4	16.4
5	20595.00	57.4 PK	74.0	-16.6	2.06 H	358	61.2	-3.8
6	20595.00	48.5 AV	54.0	-5.5	2.06 H	358	52.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

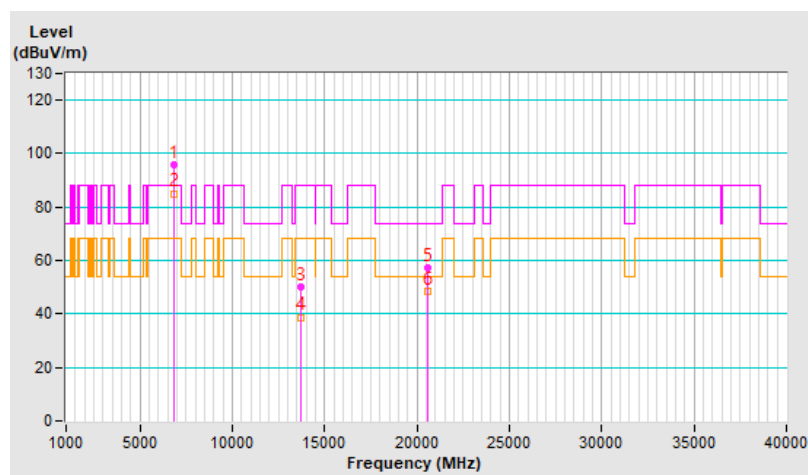


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	100.1 PK			1.00 V	63	91.9	8.2
2	*6865.00	89.3 AV			1.00 V	63	81.1	8.2
3	#13730.00	50.2 PK	88.2	-38.0	1.10 V	24	33.8	16.4
4	#13730.00	38.6 AV	68.2	-29.6	1.10 V	24	22.2	16.4
5	20595.00	56.7 PK	74.0	-17.3	2.05 V	353	60.5	-3.8
6	20595.00	48.2 AV	54.0	-5.8	2.05 V	353	52.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

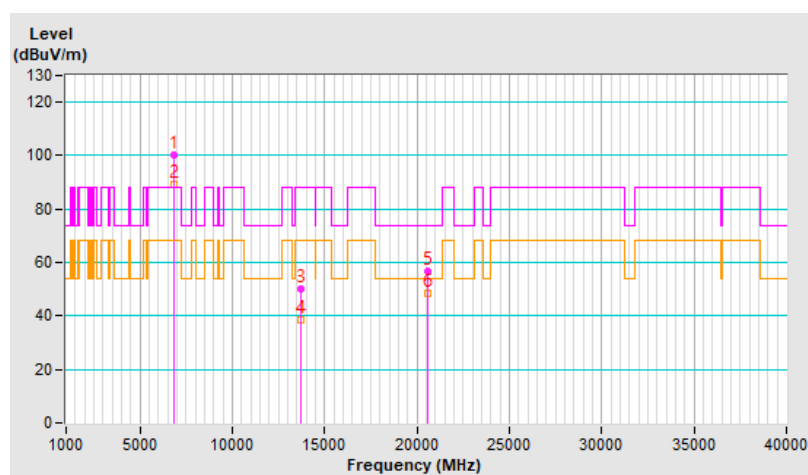


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	102.9 PK			2.36 H	201	94.0	8.9
2	*7025.00	90.9 AV			2.36 H	201	82.0	8.9
3	#7125.00	56.9 PK	88.2	-31.3	2.36 H	201	46.8	10.1
4	#7125.00	45.3 AV	68.2	-22.9	2.36 H	201	35.2	10.1
5	#14050.00	49.3 PK	88.2	-38.9	1.09 H	33	31.6	17.7
6	#14050.00	38.4 AV	68.2	-29.8	1.09 H	33	20.7	17.7
7	21075.00	58.1 PK	74.0	-15.9	2.00 H	360	61.1	-3.0
8	21075.00	49.2 AV	54.0	-4.8	2.00 H	360	52.2	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

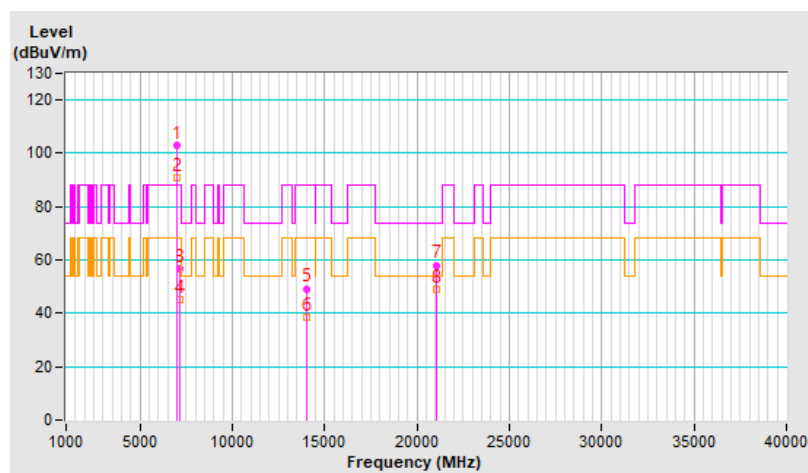


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	98.5 PK			1.87 V	328	89.6	8.9
2	*7025.00	87.3 AV			1.87 V	328	78.4	8.9
3	#7125.00	56.6 PK	88.2	-31.6	1.87 V	328	46.5	10.1
4	#7125.00	44.6 AV	68.2	-23.6	1.87 V	328	34.5	10.1
5	#14050.00	50.2 PK	88.2	-38.0	1.09 V	17	32.5	17.7
6	#14050.00	38.8 AV	68.2	-29.4	1.09 V	17	21.1	17.7
7	21075.00	57.4 PK	74.0	-16.6	1.99 V	360	60.4	-3.0
8	21075.00	48.5 AV	54.0	-5.5	1.99 V	360	51.5	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

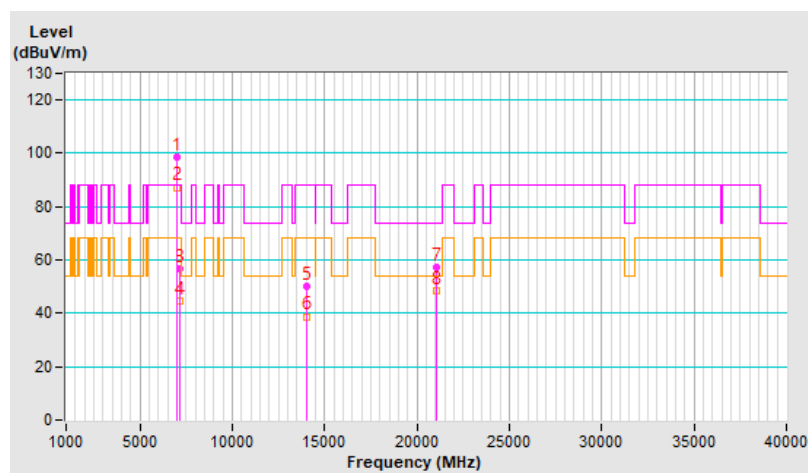


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.7 PK	88.2	-33.5	1.00 H	158	49.1	5.6
2	#5925.00	44.4 AV	68.2	-23.8	1.00 H	158	38.8	5.6
3	*6025.00	93.9 PK			1.00 H	158	88.3	5.6
4	*6025.00	85.0 AV			1.00 H	158	79.4	5.6
5	12050.00	50.3 PK	74.0	-23.7	1.09 H	17	35.7	14.6
6	12050.00	38.9 AV	54.0	-15.1	1.09 H	17	24.3	14.6
7	18075.00	57.7 PK	74.0	-16.3	1.97 H	344	63.0	-5.3
8	18075.00	48.7 AV	54.0	-5.3	1.97 H	344	54.0	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

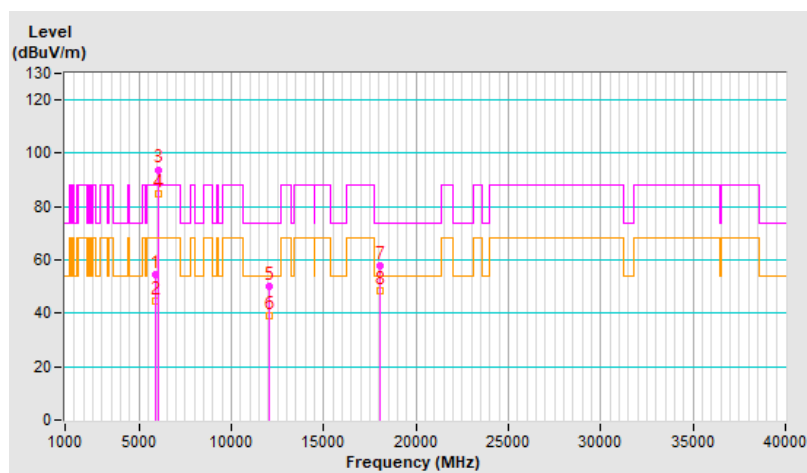


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.3 PK	88.2	-17.9	1.00 V	51	64.7	5.6
2	#5925.00	48.4 AV	68.2	-19.8	1.00 V	51	42.8	5.6
3	*6025.00	101.7 PK			1.00 V	51	96.1	5.6
4	*6025.00	90.3 AV			1.00 V	51	84.7	5.6
5	12050.00	49.9 PK	74.0	-24.1	1.10 V	10	35.3	14.6
6	12050.00	38.6 AV	54.0	-15.4	1.10 V	10	24.0	14.6
7	18075.00	57.2 PK	74.0	-16.8	1.96 V	353	62.5	-5.3
8	18075.00	48.1 AV	54.0	-5.9	1.96 V	353	53.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

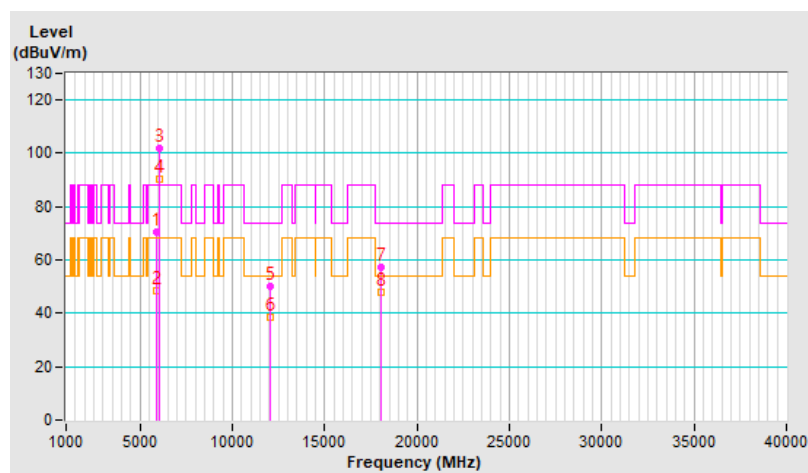


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	93.9 PK			1.00 H	147	88.1	5.8
2	*6185.00	85.3 AV			1.00 H	147	79.5	5.8
3	12370.00	49.2 PK	74.0	-24.8	1.15 H	17	34.5	14.7
4	12370.00	38.3 AV	54.0	-15.7	1.15 H	17	23.6	14.7
5	18555.00	57.9 PK	74.0	-16.1	2.06 H	341	63.3	-5.4
6	18555.00	48.8 AV	54.0	-5.2	2.06 H	341	54.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

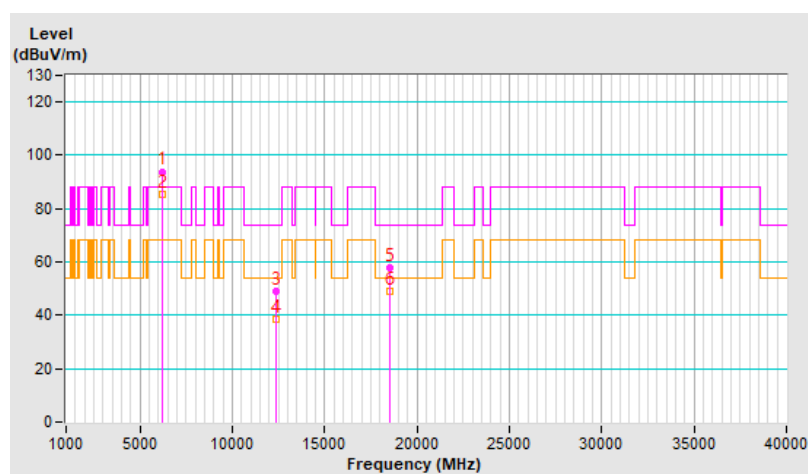


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	101.5 PK			1.01 V	35	95.7	5.8
2	*6185.00	90.1 AV			1.01 V	35	84.3	5.8
3	12370.00	50.3 PK	74.0	-23.7	1.07 V	7	35.6	14.7
4	12370.00	38.8 AV	54.0	-15.2	1.07 V	7	24.1	14.7
5	18555.00	57.4 PK	74.0	-16.6	2.02 V	360	62.8	-5.4
6	18555.00	48.5 AV	54.0	-5.5	2.02 V	360	53.9	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

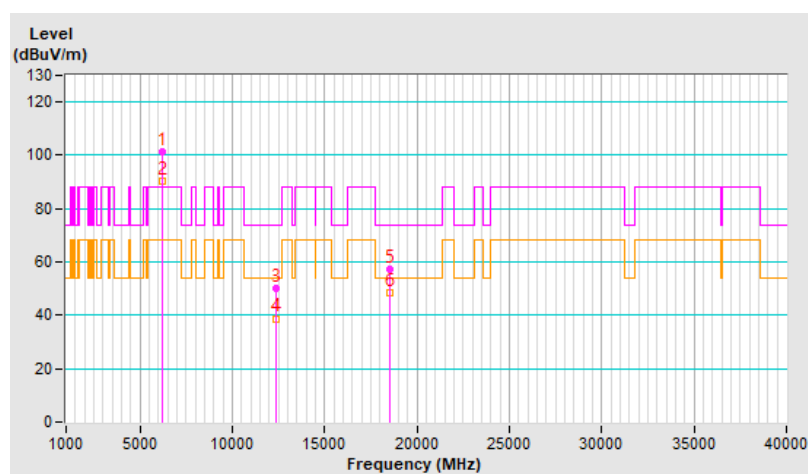


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	94.1 PK			1.06 H	171	87.7	6.4
2	*6345.00	85.4 AV			1.06 H	171	79.0	6.4
3	12690.00	49.2 PK	74.0	-24.8	1.10 H	39	34.3	14.9
4	12690.00	38.4 AV	54.0	-15.6	1.10 H	39	23.5	14.9
5	19035.00	57.4 PK	74.0	-16.6	1.99 H	342	62.3	-4.9
6	19035.00	48.9 AV	54.0	-5.1	1.99 H	342	53.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

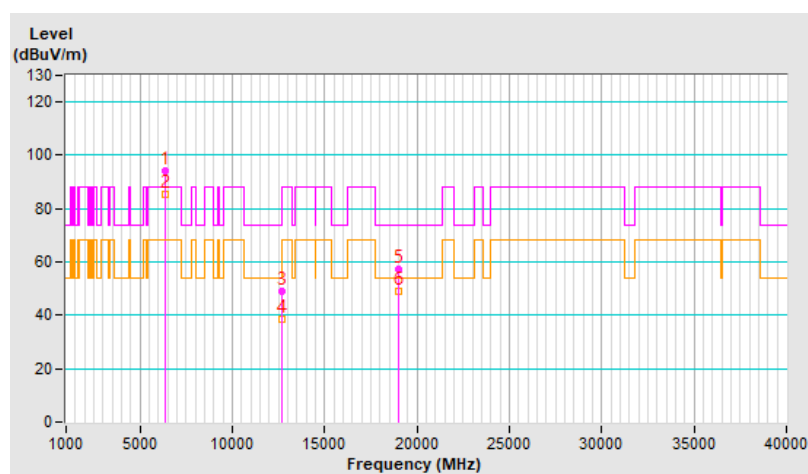


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	102.1 PK			1.04 V	43	95.7	6.4
2	*6345.00	90.7 AV			1.04 V	43	84.3	6.4
3	12690.00	49.8 PK	74.0	-24.2	1.14 V	36	34.9	14.9
4	12690.00	38.7 AV	54.0	-15.3	1.14 V	36	23.8	14.9
5	19035.00	57.4 PK	74.0	-16.6	2.02 V	360	62.3	-4.9
6	19035.00	48.4 AV	54.0	-5.6	2.02 V	360	53.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

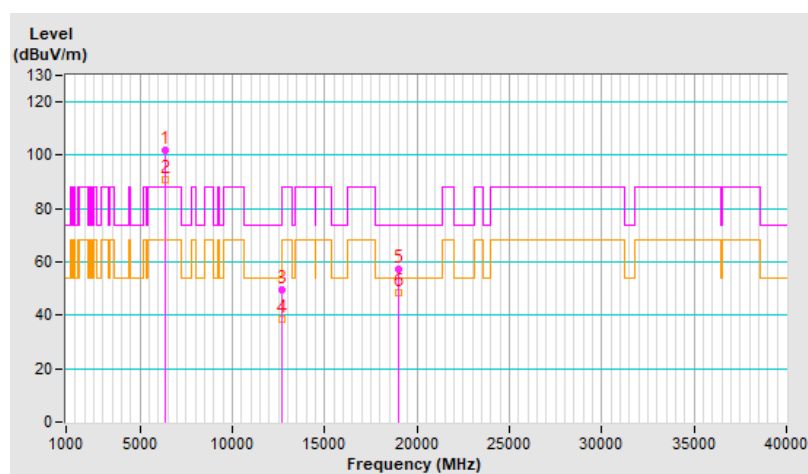


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	93.8 PK			1.00 H	164	86.6	7.2
2	*6505.00	85.2 AV			1.00 H	164	78.0	7.2
3	#13010.00	50.0 PK	88.2	-38.2	1.15 H	24	35.1	14.9
4	#13010.00	38.7 AV	68.2	-29.5	1.15 H	24	23.8	14.9
5	19515.00	57.1 PK	74.0	-16.9	2.03 H	340	61.8	-4.7
6	19515.00	48.4 AV	54.0	-5.6	2.03 H	340	53.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

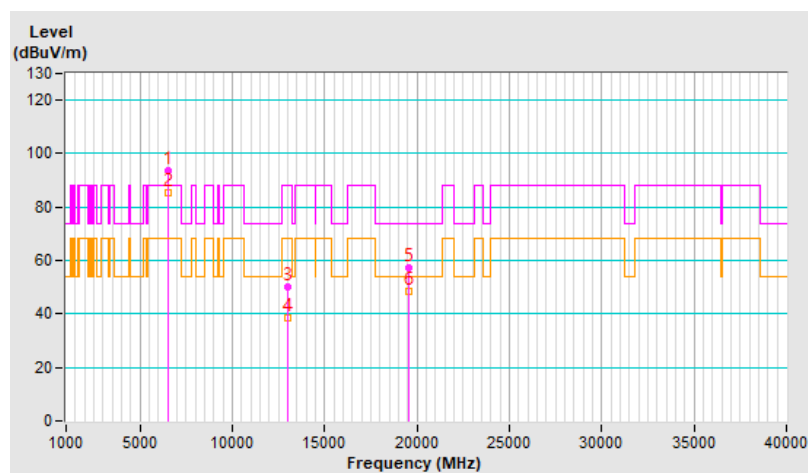


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	101.6 PK			1.01 V	41	94.4	7.2
2	*6505.00	89.9 AV			1.01 V	41	82.7	7.2
3	#13010.00	50.5 PK	88.2	-37.7	1.12 V	13	35.6	14.9
4	#13010.00	39.1 AV	68.2	-29.1	1.12 V	13	24.2	14.9
5	19515.00	56.7 PK	74.0	-17.3	2.01 V	354	61.4	-4.7
6	19515.00	48.1 AV	54.0	-5.9	2.01 V	354	52.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

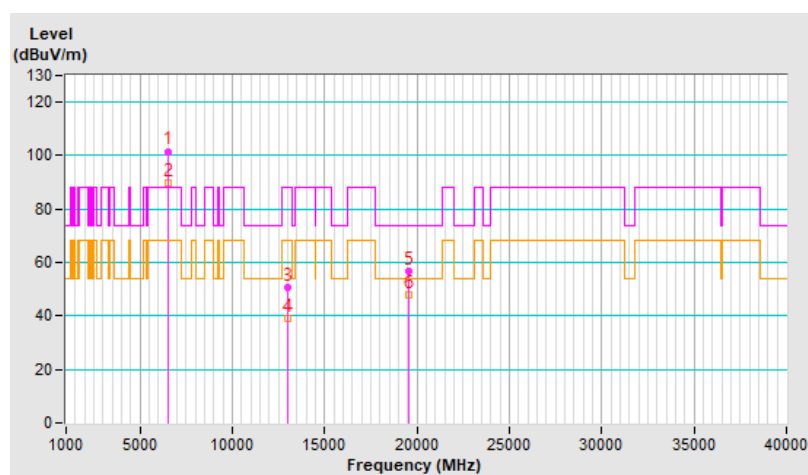


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	94.0 PK			1.00 H	148	86.0	8.0
2	*6825.00	85.0 AV			1.00 H	148	77.0	8.0
3	#13650.00	49.2 PK	88.2	-39.0	1.11 H	35	33.1	16.1
4	#13650.00	38.4 AV	68.2	-29.8	1.11 H	35	22.3	16.1
5	20475.00	58.0 PK	74.0	-16.0	2.03 H	360	61.6	-3.6
6	20475.00	49.3 AV	54.0	-4.7	2.03 H	360	52.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

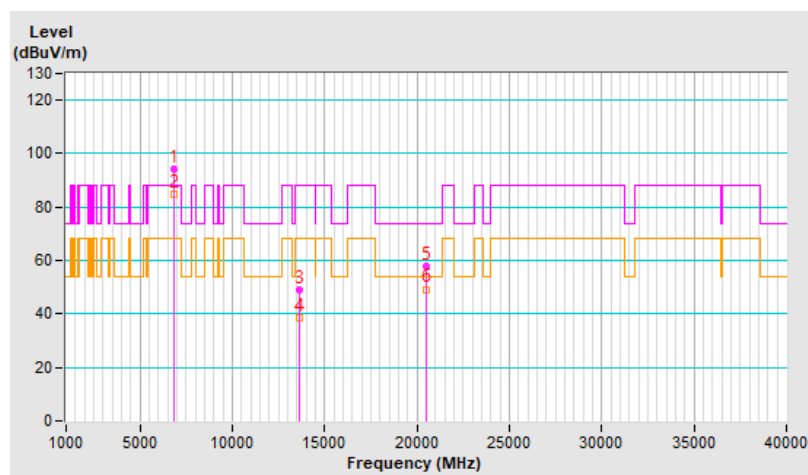


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	101.3 PK			1.04 V	53	93.3	8.0
2	*6825.00	89.8 AV			1.04 V	53	81.8	8.0
3	#13650.00	49.5 PK	88.2	-38.7	1.15 V	12	33.4	16.1
4	#13650.00	38.4 AV	68.2	-29.8	1.15 V	12	22.3	16.1
5	20475.00	56.9 PK	74.0	-17.1	1.98 V	360	60.5	-3.6
6	20475.00	48.2 AV	54.0	-5.8	1.98 V	360	51.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

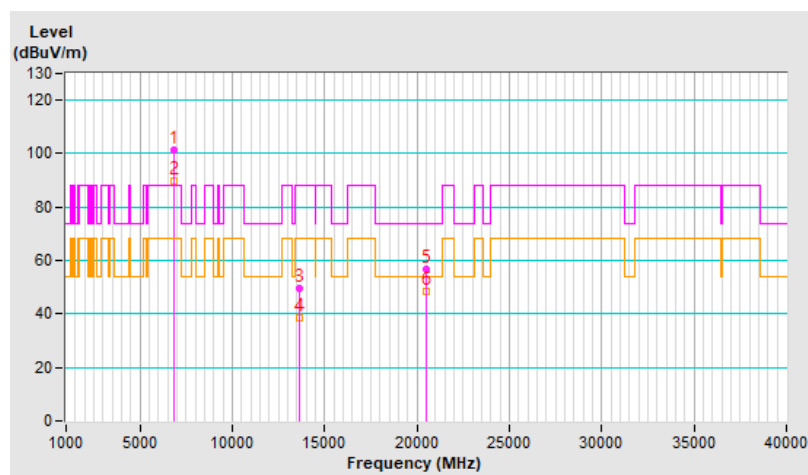


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	97.1 PK			2.46 H	211	88.2	8.9
2	*6985.00	89.0 AV			2.46 H	211	80.1	8.9
3	#7125.00	63.2 PK	88.2	-25.0	2.46 H	211	53.1	10.1
4	#7125.00	55.2 AV	68.2	-13.0	2.46 H	211	45.1	10.1
5	#13970.00	49.6 PK	88.2	-38.6	1.06 H	28	32.3	17.3
6	#13970.00	38.4 AV	68.2	-29.8	1.06 H	28	21.1	17.3
7	20955.00	57.2 PK	74.0	-16.8	2.07 H	360	60.6	-3.4
8	20955.00	48.3 AV	54.0	-5.7	2.07 H	360	51.7	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

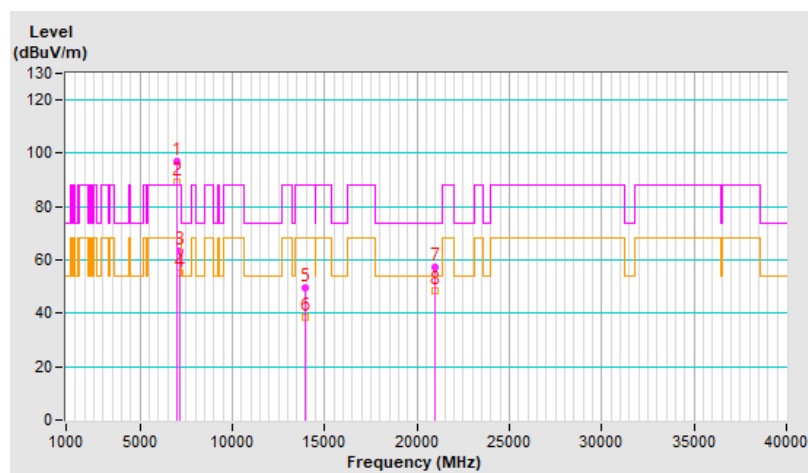


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	96.7 PK			1.21 V	322	87.8	8.9
2	*6985.00	85.8 AV			1.21 V	322	76.9	8.9
3	#7125.00	65.7 PK	88.2	-22.5	1.21 V	322	55.6	10.1
4	#7125.00	51.2 AV	68.2	-17.0	1.21 V	322	41.1	10.1
5	#13970.00	49.6 PK	88.2	-38.6	1.07 V	12	32.3	17.3
6	#13970.00	38.6 AV	68.2	-29.6	1.07 V	12	21.3	17.3
7	20955.00	56.8 PK	74.0	-17.2	2.03 V	357	60.2	-3.4
8	20955.00	47.8 AV	54.0	-6.2	2.03 V	357	51.2	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

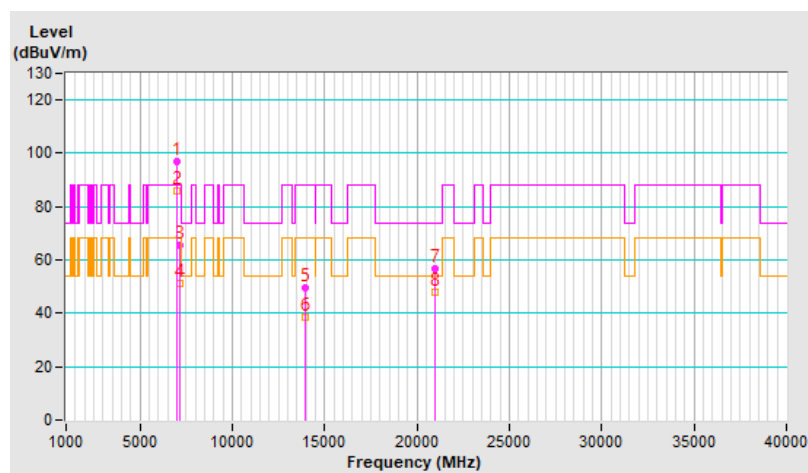


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.1 PK	88.2	-27.1	1.02 H	157	55.5	5.6
2	#5925.00	44.9 AV	68.2	-23.3	1.02 H	157	39.3	5.6
3	*6025.00	96.7 PK			1.02 H	157	91.1	5.6
4	*6025.00	85.5 AV			1.02 H	157	79.9	5.6
5	12050.00	49.3 PK	74.0	-24.7	1.14 H	37	34.7	14.6
6	12050.00	38.2 AV	54.0	-15.8	1.14 H	37	23.6	14.6
7	18075.00	58.1 PK	74.0	-15.9	1.99 H	360	63.4	-5.3
8	18075.00	49.3 AV	54.0	-4.7	1.99 H	360	54.6	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

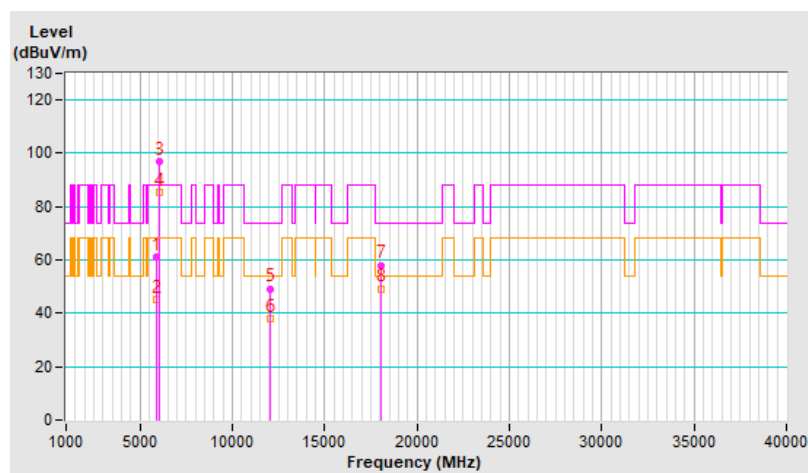


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.4 PK	88.2	-19.8	1.07 V	51	62.8	5.6
2	#5925.00	49.5 AV	68.2	-18.7	1.07 V	51	43.9	5.6
3	*6025.00	103.3 PK			1.07 V	51	97.7	5.6
4	*6025.00	90.7 AV			1.07 V	51	85.1	5.6
5	12050.00	49.9 PK	74.0	-24.1	1.12 V	10	35.3	14.6
6	12050.00	38.6 AV	54.0	-15.4	1.12 V	10	24.0	14.6
7	18075.00	56.5 PK	74.0	-17.5	2.02 V	360	61.8	-5.3
8	18075.00	47.9 AV	54.0	-6.1	2.02 V	360	53.2	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

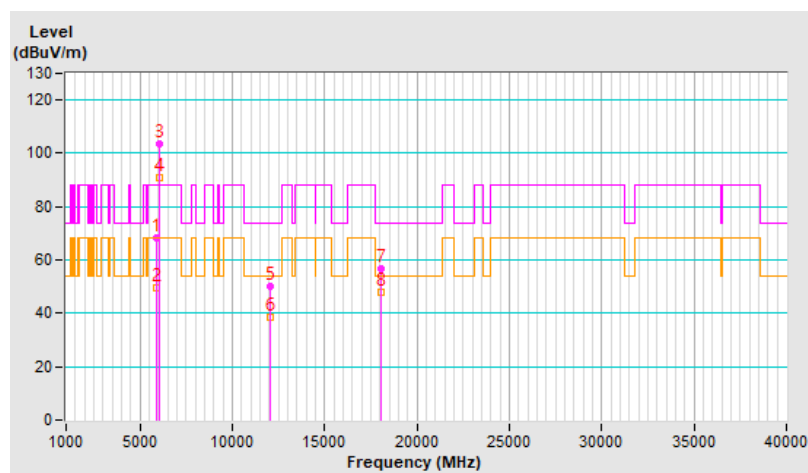


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	96.6 PK			1.01 H	169	90.8	5.8
2	*6185.00	85.1 AV			1.01 H	169	79.3	5.8
3	12370.00	49.2 PK	74.0	-24.8	1.11 H	15	34.5	14.7
4	12370.00	38.2 AV	54.0	-15.8	1.11 H	15	23.5	14.7
5	18555.00	57.9 PK	74.0	-16.1	2.02 H	357	63.3	-5.4
6	18555.00	49.2 AV	54.0	-4.8	2.02 H	357	54.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

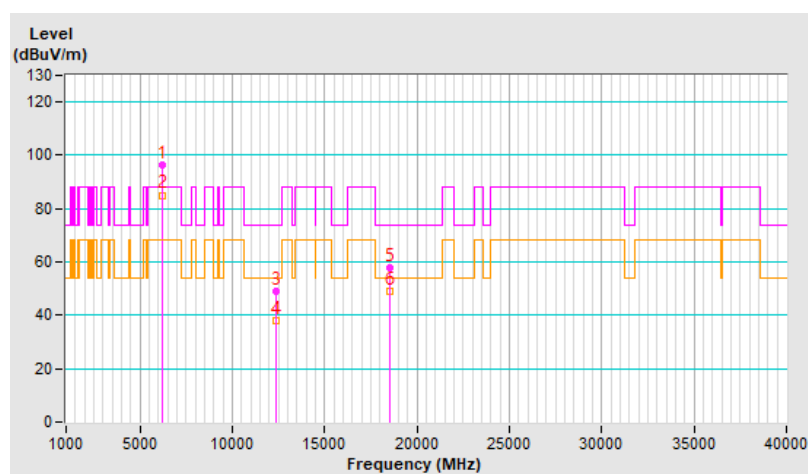


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	103.2 PK			1.06 V	56	97.4	5.8
2	*6185.00	90.8 AV			1.06 V	56	85.0	5.8
3	12370.00	50.6 PK	74.0	-23.4	1.07 V	12	35.9	14.7
4	12370.00	39.1 AV	54.0	-14.9	1.07 V	12	24.4	14.7
5	18555.00	57.0 PK	74.0	-17.0	2.00 V	353	62.4	-5.4
6	18555.00	48.1 AV	54.0	-5.9	2.00 V	353	53.5	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

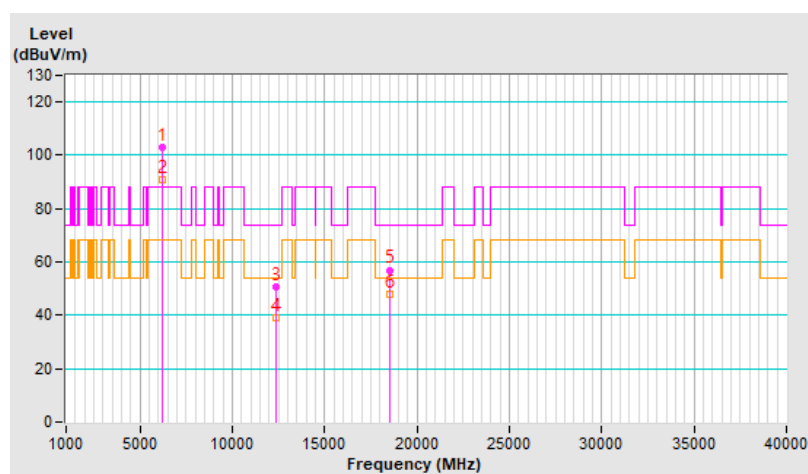


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	96.8 PK			1.02 H	161	90.4	6.4
2	*6345.00	85.5 AV			1.02 H	161	79.1	6.4
3	12690.00	49.7 PK	74.0	-24.3	1.11 H	19	34.8	14.9
4	12690.00	38.4 AV	54.0	-15.6	1.11 H	19	23.5	14.9
5	19035.00	57.8 PK	74.0	-16.2	1.99 H	360	62.7	-4.9
6	19035.00	49.1 AV	54.0	-4.9	1.99 H	360	54.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

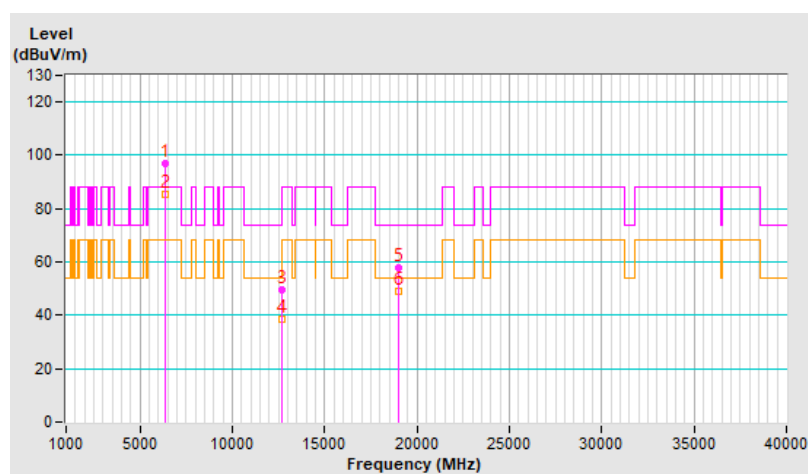


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	103.0 PK			1.01 V	53	96.6	6.4
2	*6345.00	90.5 AV			1.01 V	53	84.1	6.4
3	12690.00	50.0 PK	74.0	-24.0	1.09 V	7	35.1	14.9
4	12690.00	38.6 AV	54.0	-15.4	1.09 V	7	23.7	14.9
5	19035.00	57.1 PK	74.0	-16.9	1.97 V	350	62.0	-4.9
6	19035.00	48.6 AV	54.0	-5.4	1.97 V	350	53.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

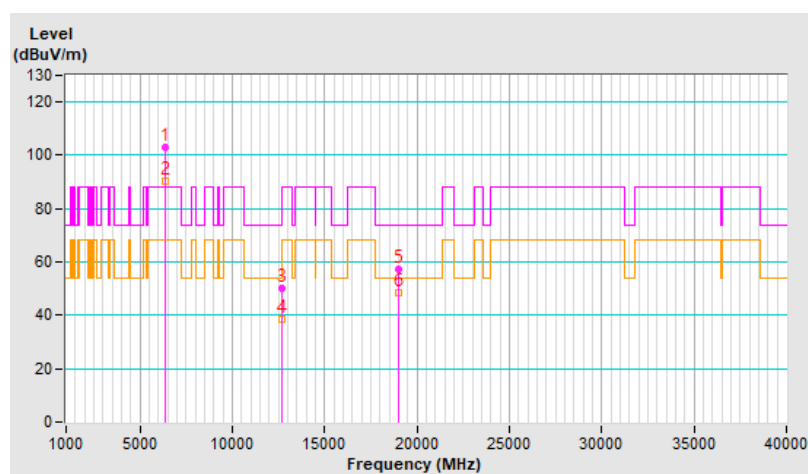


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	96.6 PK			1.06 H	172	89.4	7.2
2	*6505.00	85.5 AV			1.06 H	172	78.3	7.2
3	#13010.00	49.3 PK	88.2	-38.9	1.15 H	32	34.4	14.9
4	#13010.00	38.4 AV	68.2	-29.8	1.15 H	32	23.5	14.9
5	19515.00	57.4 PK	74.0	-16.6	1.97 H	355	62.1	-4.7
6	19515.00	48.5 AV	54.0	-5.5	1.97 H	355	53.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

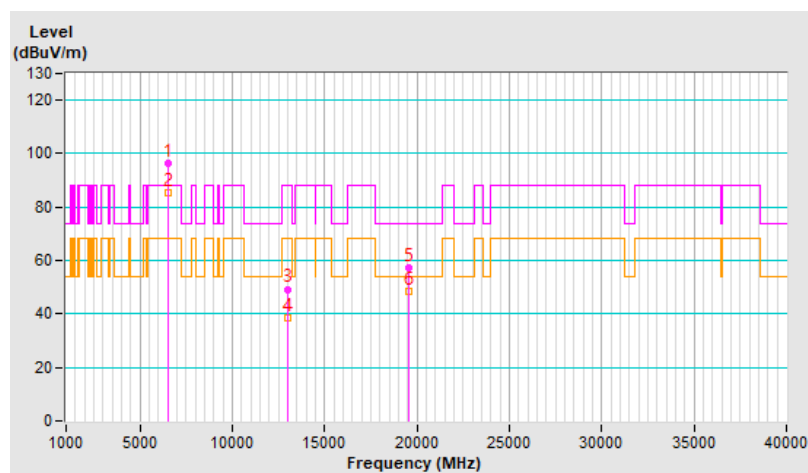


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.4 PK			1.06 V	37	96.2	7.2
2	*6505.00	90.5 AV			1.06 V	37	83.3	7.2
3	#13010.00	49.6 PK	88.2	-38.6	1.09 V	35	34.7	14.9
4	#13010.00	38.4 AV	68.2	-29.8	1.09 V	35	23.5	14.9
5	19515.00	56.4 PK	74.0	-17.6	2.05 V	360	61.1	-4.7
6	19515.00	47.8 AV	54.0	-6.2	2.05 V	360	52.5	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

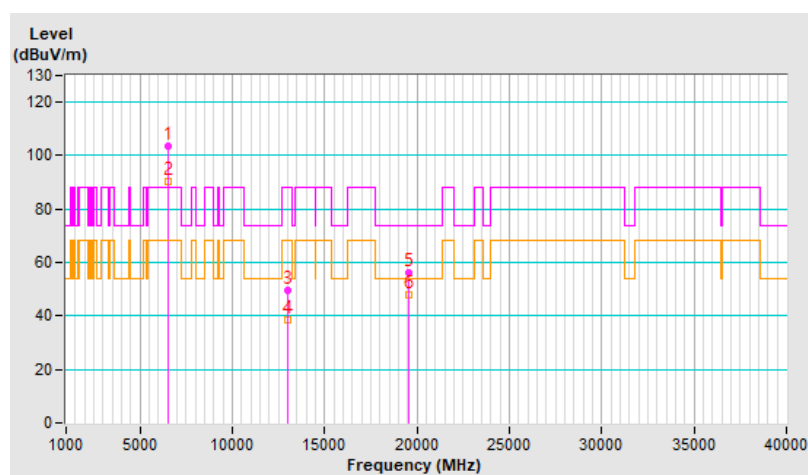


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	97.5 PK			1.04 H	162	89.5	8.0
2	*6825.00	86.0 AV			1.04 H	162	78.0	8.0
3	#13650.00	50.0 PK	88.2	-38.2	1.11 H	11	33.9	16.1
4	#13650.00	38.9 AV	68.2	-29.3	1.11 H	11	22.8	16.1
5	20475.00	57.5 PK	74.0	-16.5	2.06 H	351	61.1	-3.6
6	20475.00	48.9 AV	54.0	-5.1	2.06 H	351	52.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

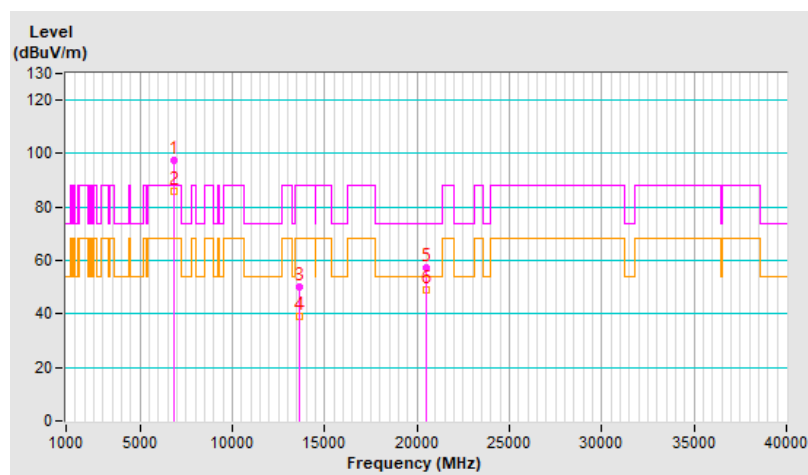


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	103.5 PK			1.06 V	54	95.5	8.0
2	*6825.00	90.9 AV			1.06 V	54	82.9	8.0
3	#13650.00	50.1 PK	88.2	-38.1	1.14 V	5	34.0	16.1
4	#13650.00	38.8 AV	68.2	-29.4	1.14 V	5	22.7	16.1
5	20475.00	57.0 PK	74.0	-17.0	2.01 V	360	60.6	-3.6
6	20475.00	47.9 AV	54.0	-6.1	2.01 V	360	51.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

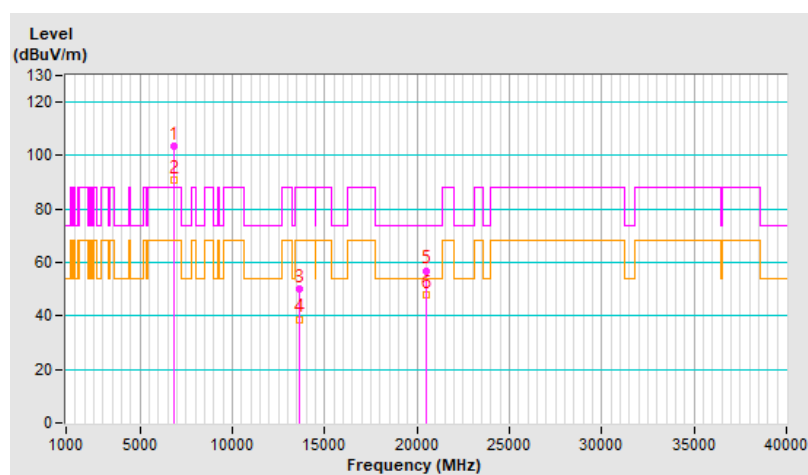


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	101.1 PK			2.35 H	206	92.2	8.9
2	*6985.00	89.9 AV			2.35 H	206	81.0	8.9
3	#7125.00	70.3 PK	88.2	-17.9	2.35 H	206	60.2	10.1
4	#7125.00	56.7 AV	68.2	-11.5	2.35 H	206	46.6	10.1
5	#13970.00	49.5 PK	88.2	-38.7	1.16 H	23	32.2	17.3
6	#13970.00	38.5 AV	68.2	-29.7	1.16 H	23	21.2	17.3
7	20955.00	57.5 PK	74.0	-16.5	1.98 H	360	60.9	-3.4
8	20955.00	48.8 AV	54.0	-5.2	1.98 H	360	52.2	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

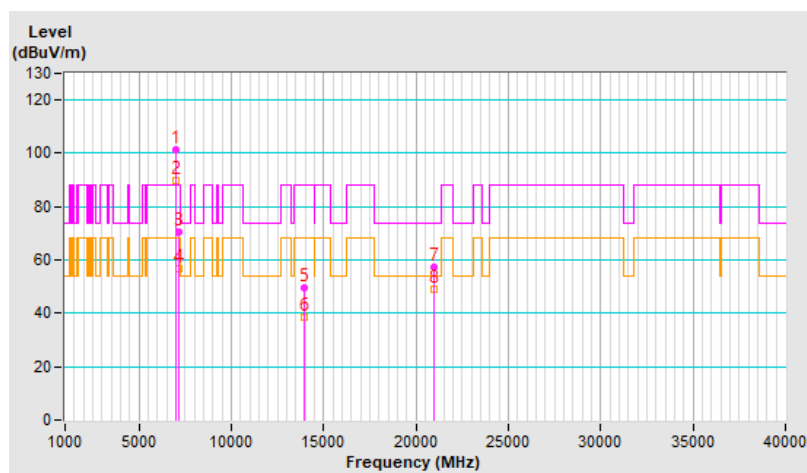


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	97.8 PK			1.20 V	322	88.9	8.9
2	*6985.00	86.6 AV			1.20 V	322	77.7	8.9
3	#7125.00	70.2 PK	88.2	-18.0	1.20 V	322	60.1	10.1
4	#7125.00	53.7 AV	68.2	-14.5	1.20 V	322	43.6	10.1
5	#13970.00	50.3 PK	88.2	-37.9	1.05 V	8	33.0	17.3
6	#13970.00	39.3 AV	68.2	-28.9	1.05 V	8	22.0	17.3
7	20955.00	56.7 PK	74.0	-17.3	2.04 V	360	60.1	-3.4
8	20955.00	47.8 AV	54.0	-6.2	2.04 V	360	51.2	-3.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

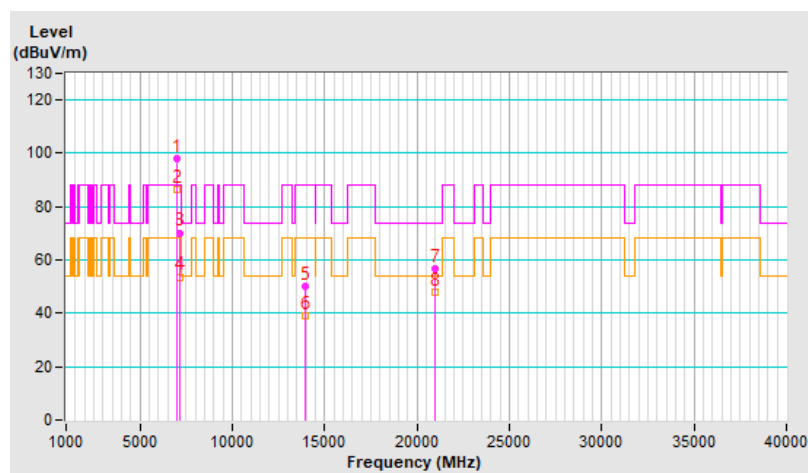


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

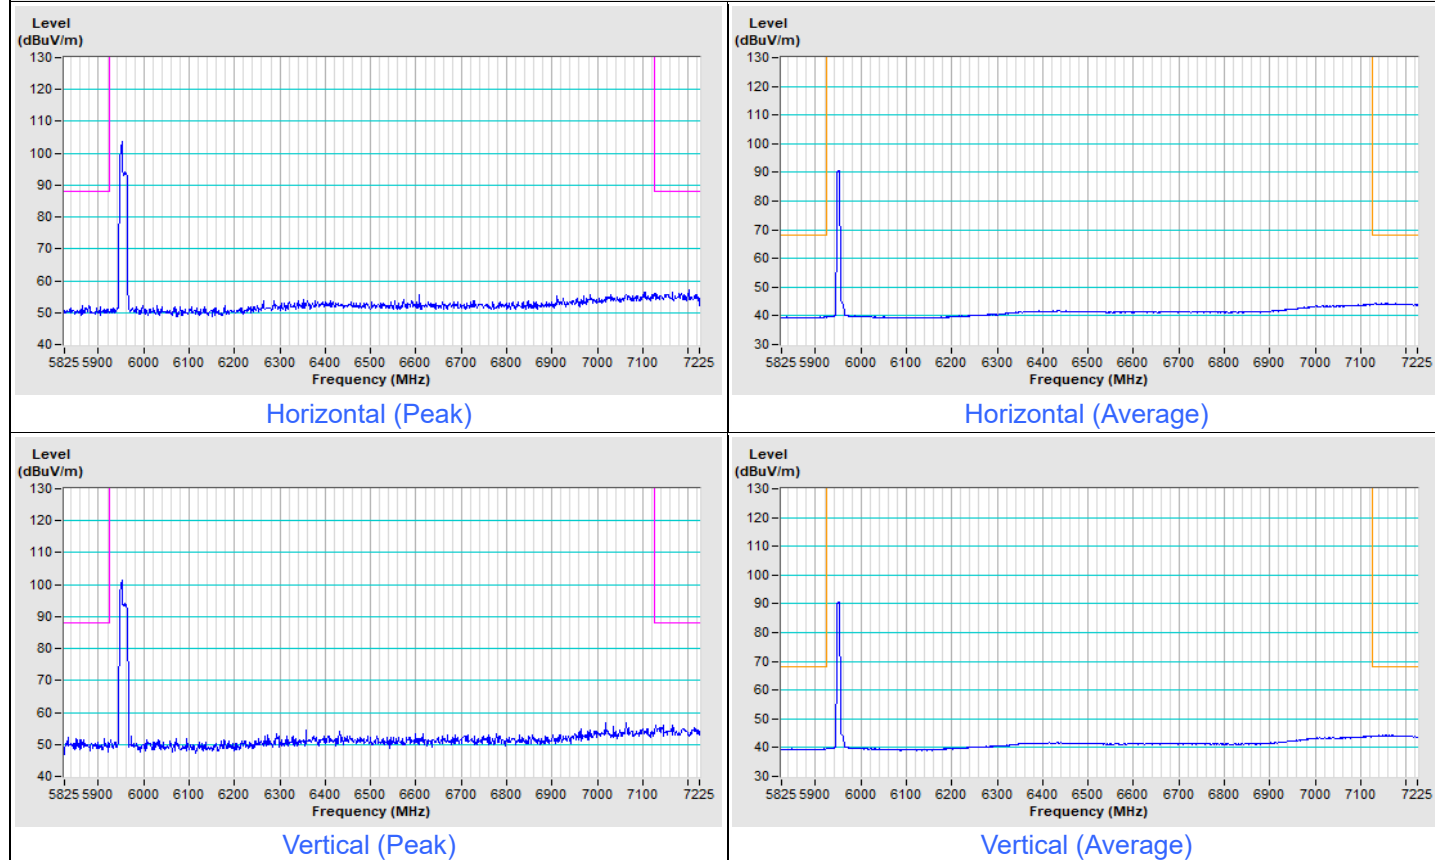


802.11be (EHT20) 52+26-tone MRU Channel 233

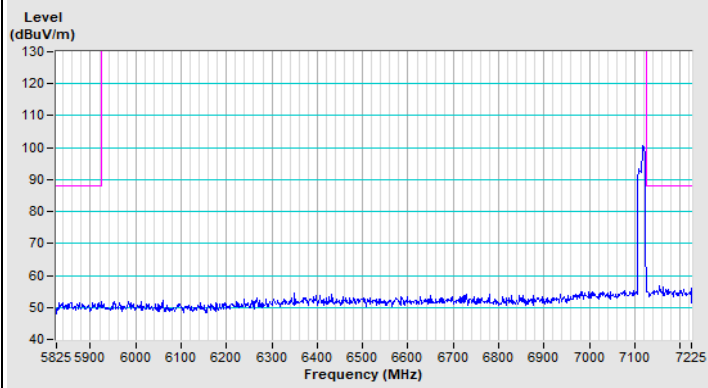


Horizontal (Peak)

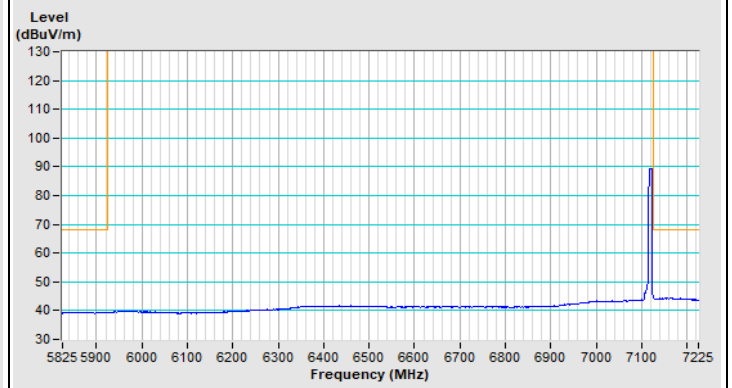

Horizontal (Average)

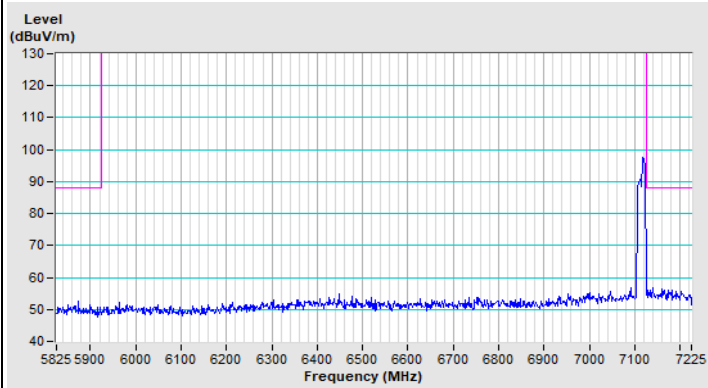


Vertical (Peak)

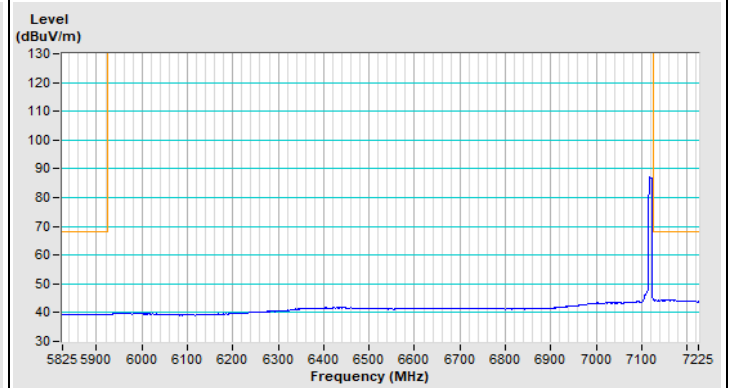


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

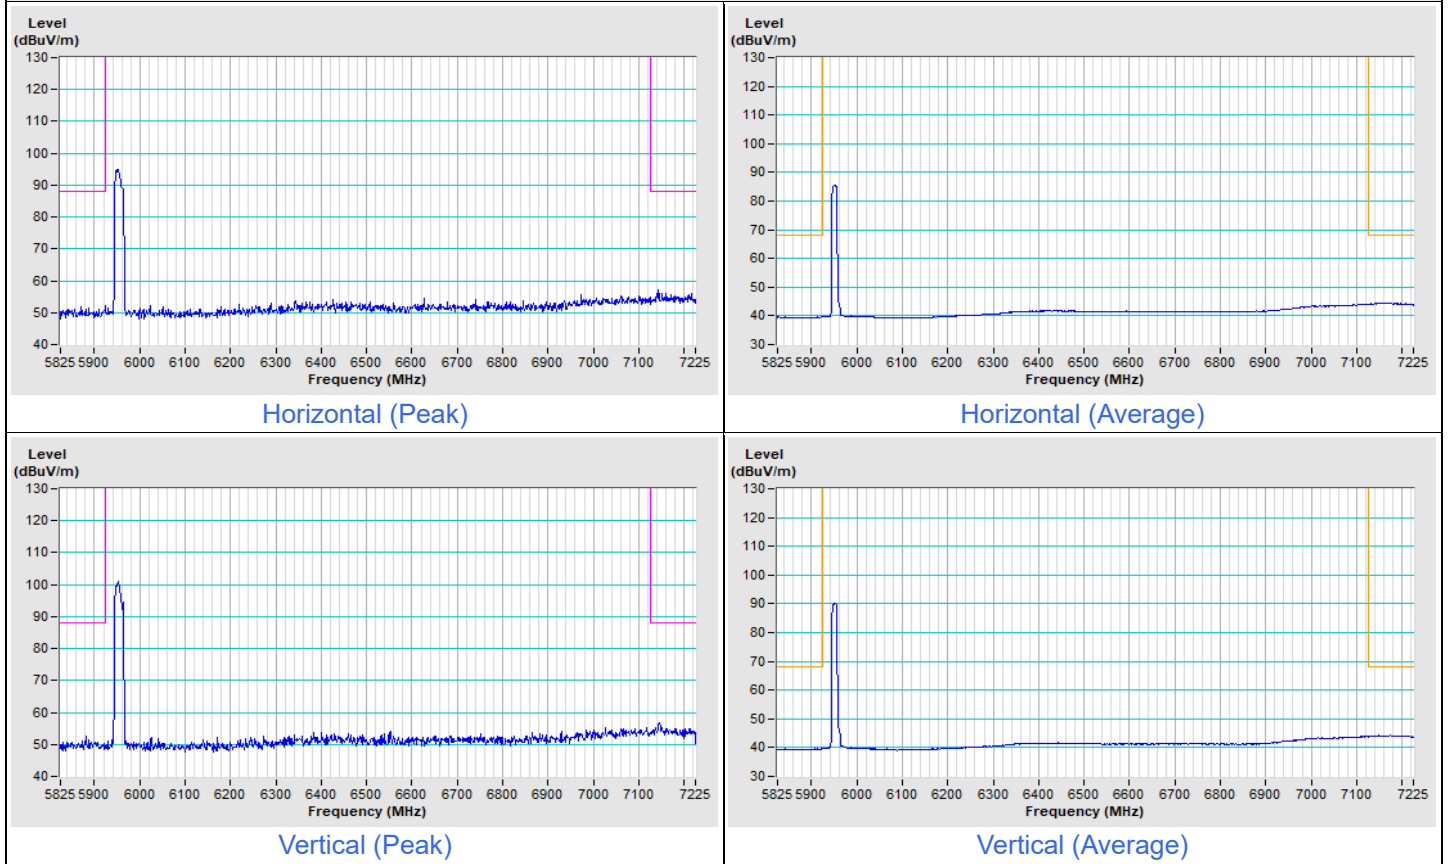


802.11be (EHT20) 106+26-tone MRU Channel 233

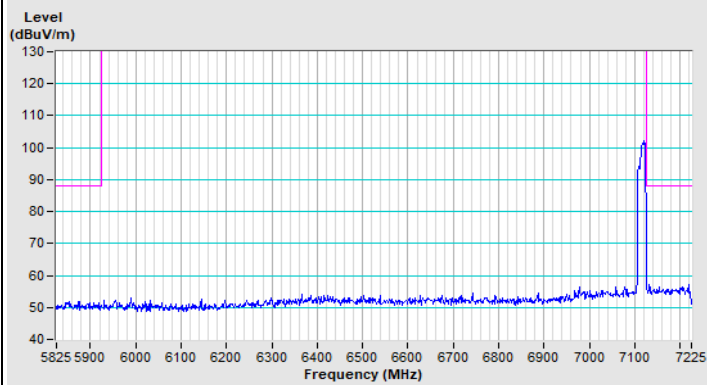


Horizontal (Peak)

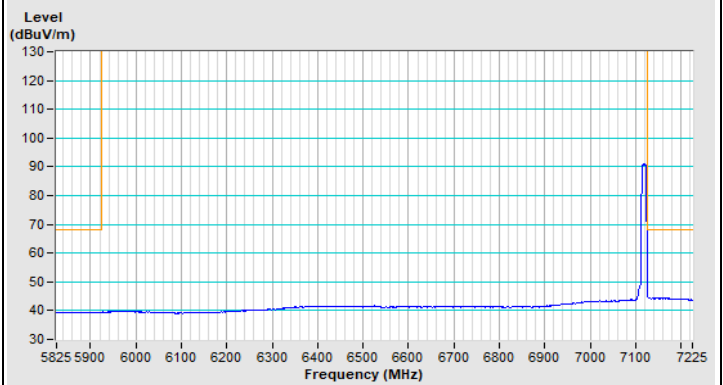

Horizontal (Average)

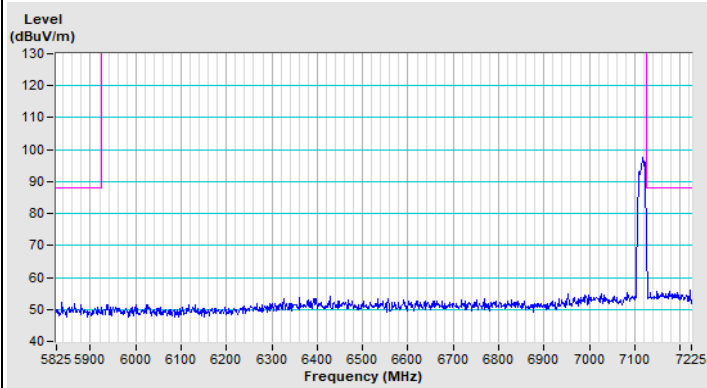


Vertical (Peak)

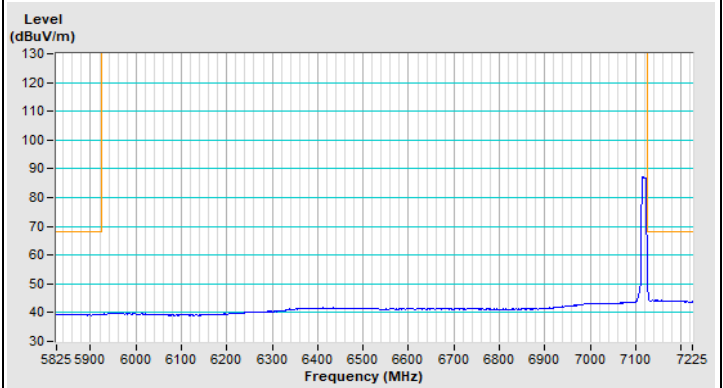


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

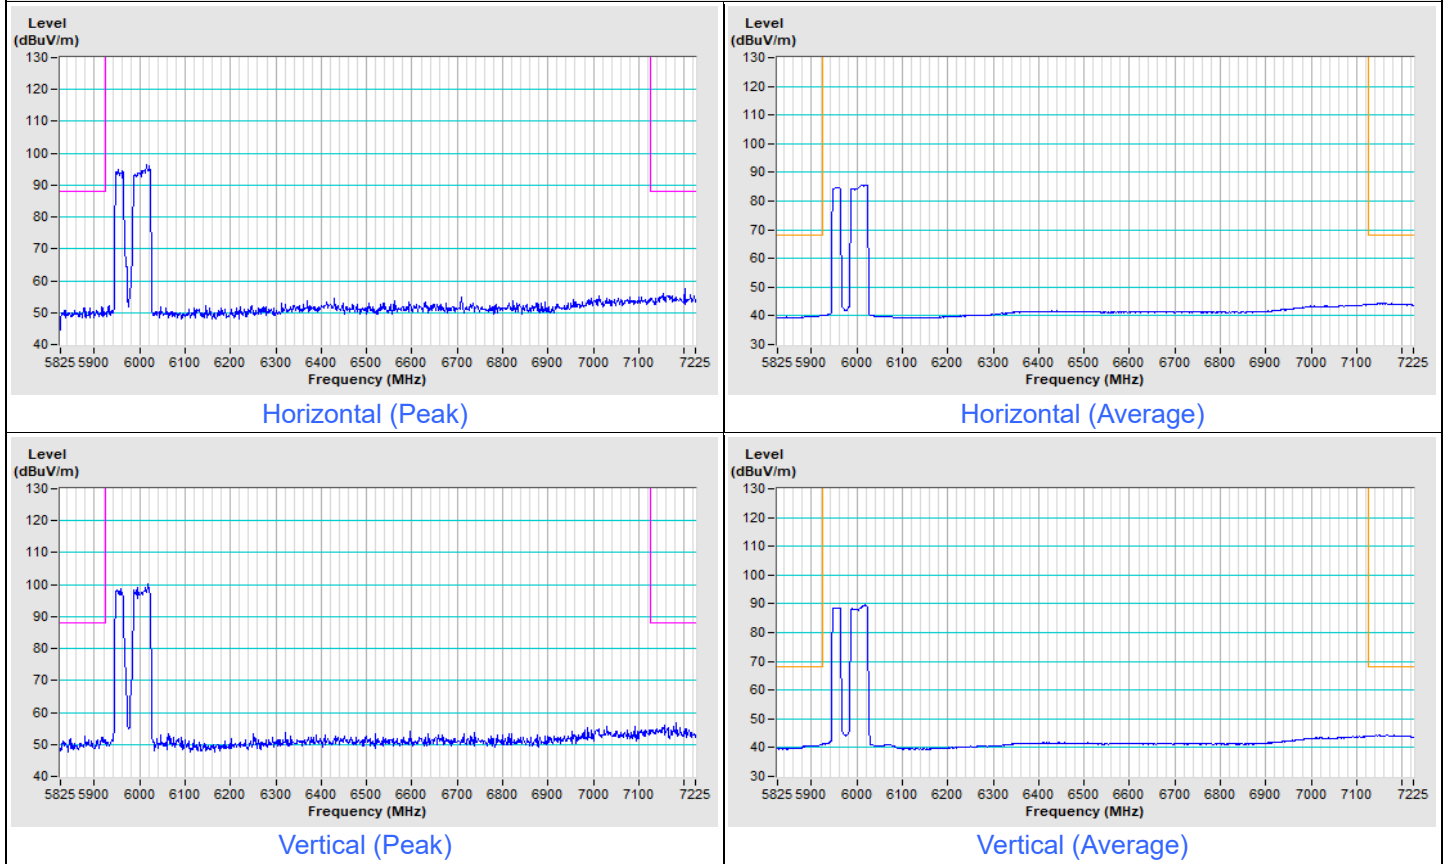


802.11be (EHT80) 484+242-tone MRU Channel 215

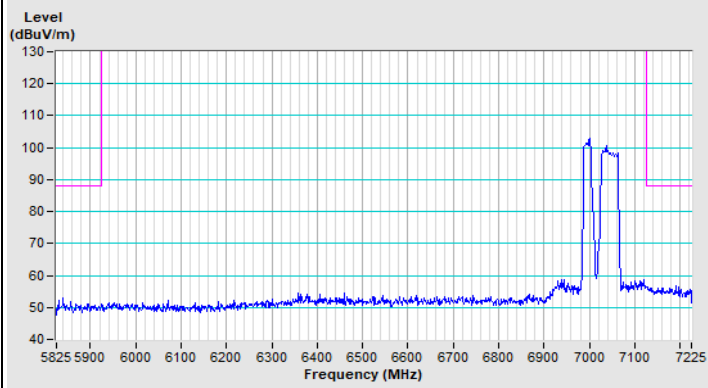


Horizontal (Peak)

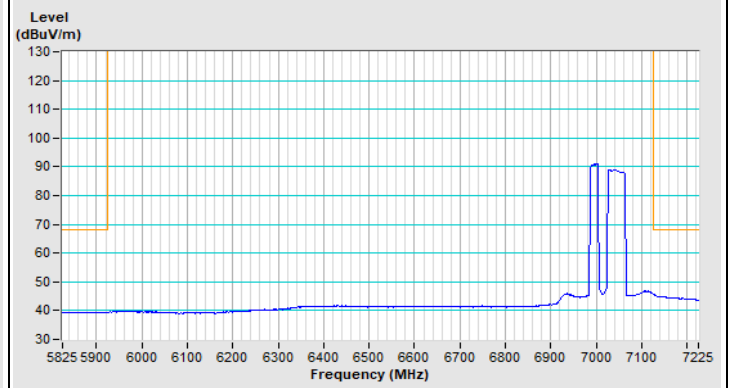

Horizontal (Average)

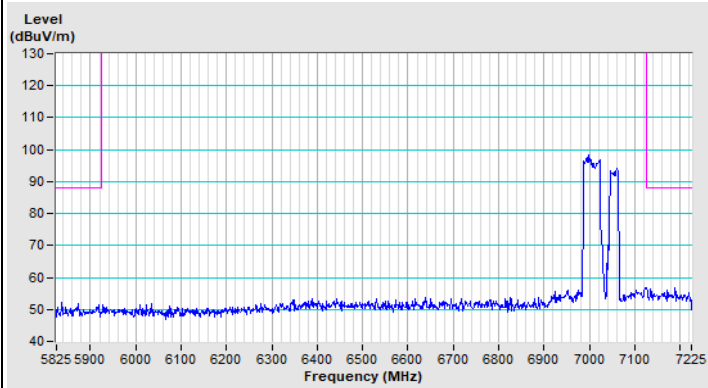


Vertical (Peak)

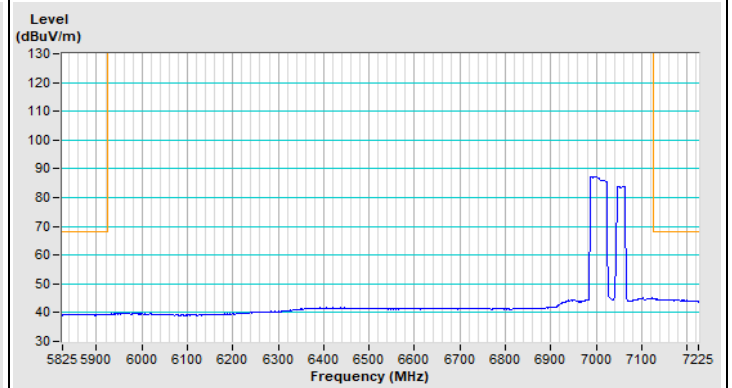


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

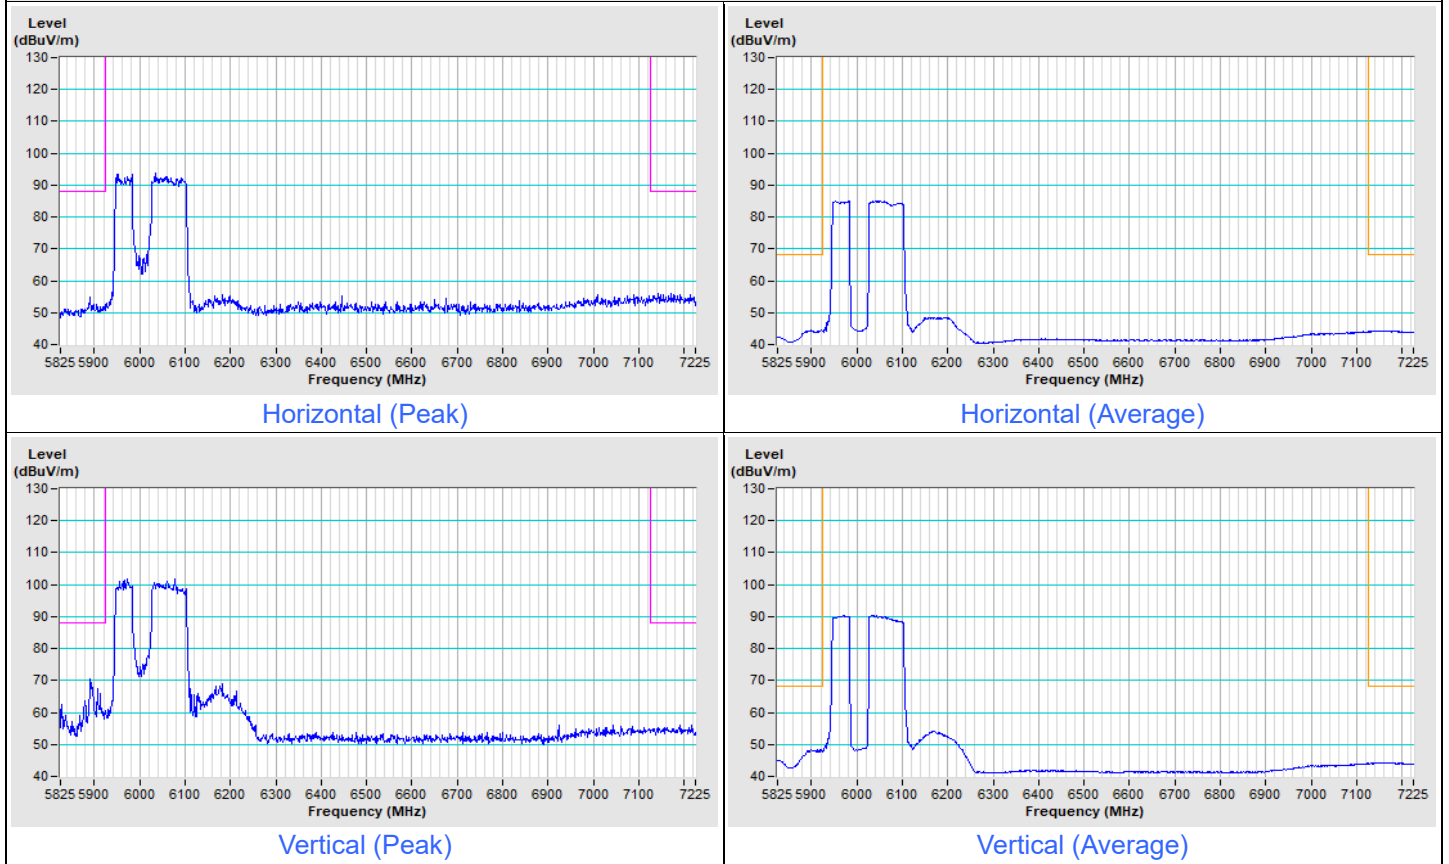


802.11be (EHT160) 996+484-tone MRU Channel 207

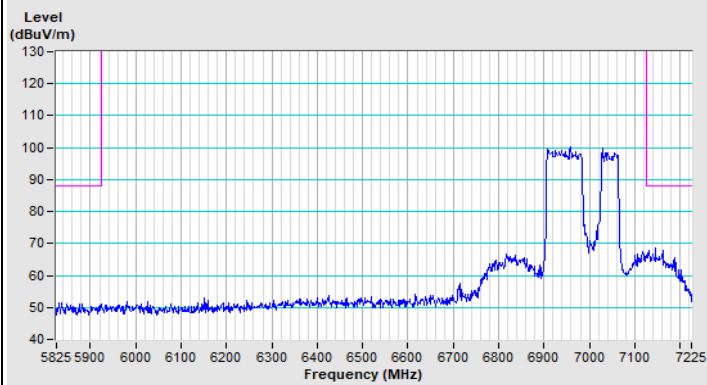


Horizontal (Peak)

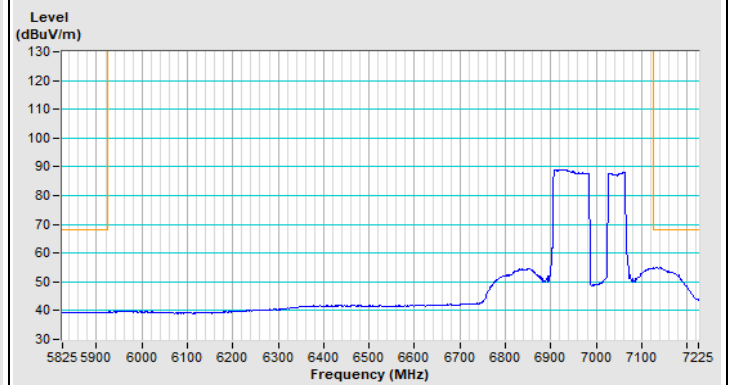

Horizontal (Average)

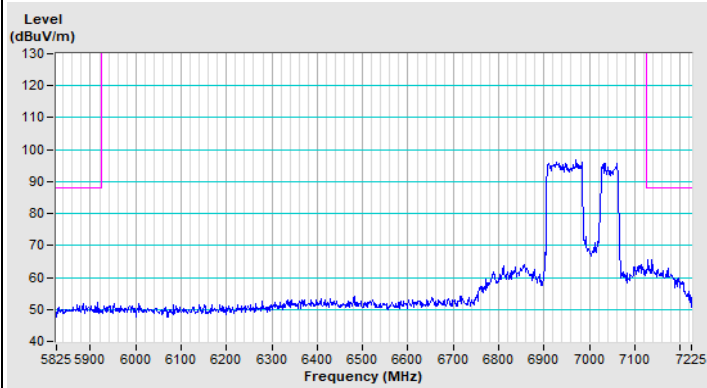


Vertical (Peak)

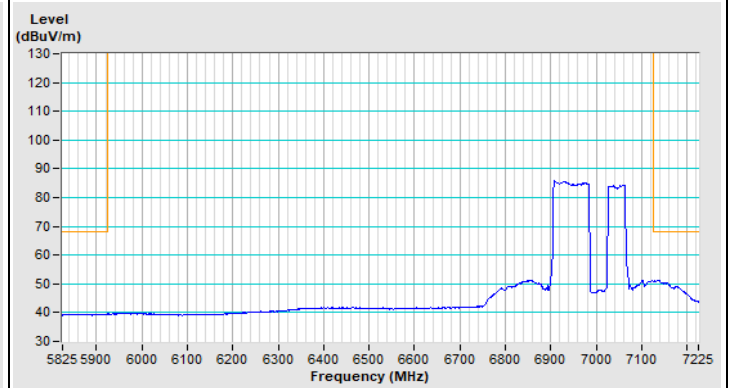


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

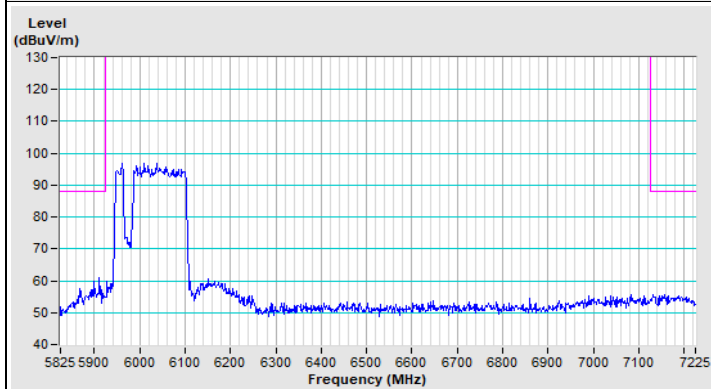


Horizontal (Peak)

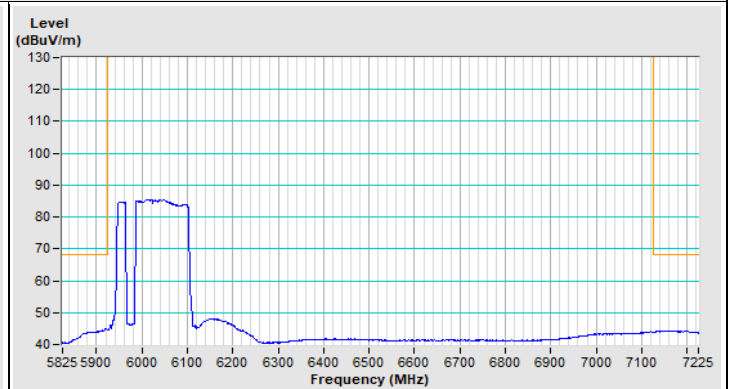

Horizontal (Average)

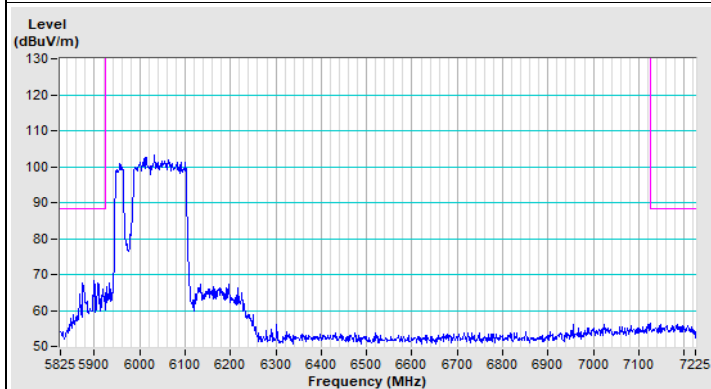


Vertical (Peak)

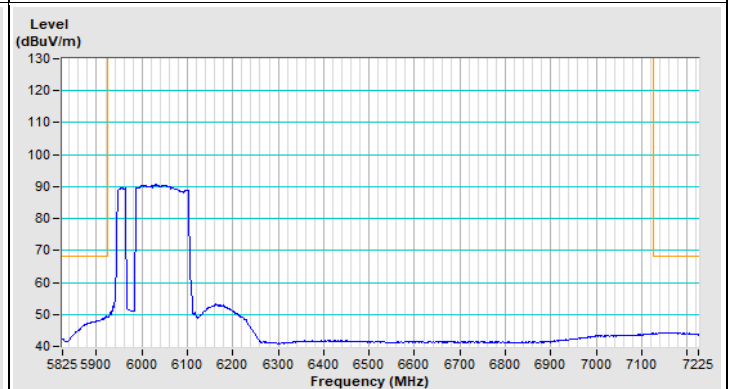


Vertical (Average)


802.11be (EHT160) 996+484+242-tone MRU Channel 207

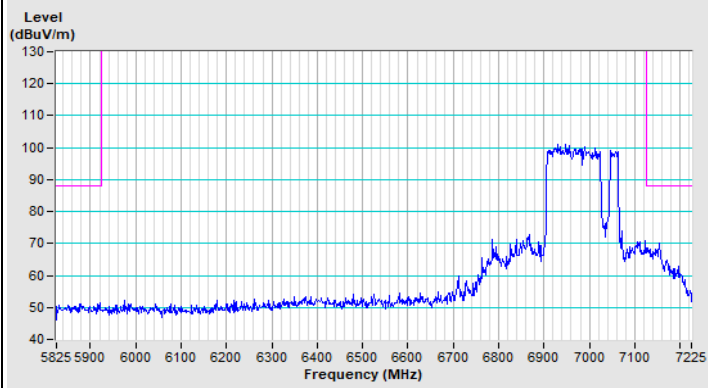


Horizontal (Peak)

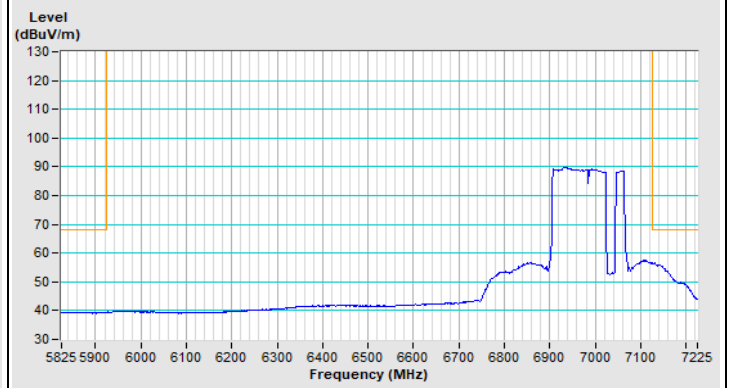

Horizontal (Average)

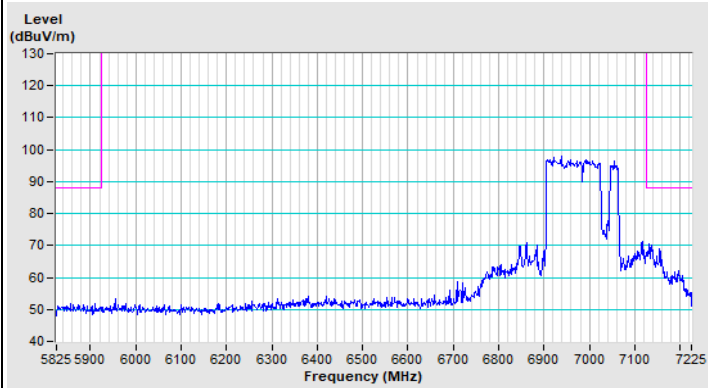

Vertical (Peak)

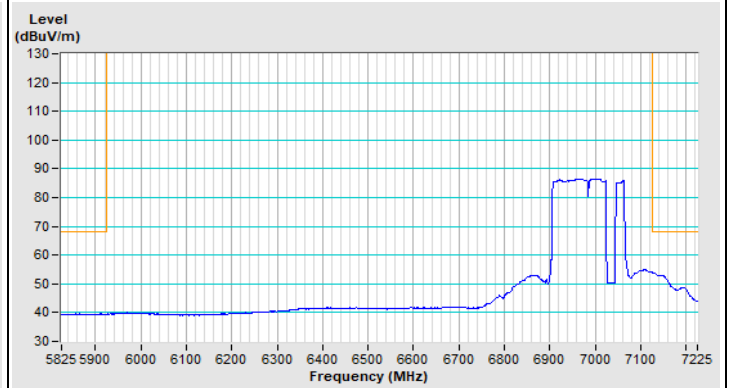

Vertical (Average)


Mode B_2TX

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.18 H	164	45.5	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.18 H	164	33.9	5.6
3	*5955.00	97.4 PK			1.18 H	164	91.9	5.5
4	*5955.00	85.1 AV			1.18 H	164	79.6	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.67 H	7	32.1	14.6
6	11910.00	34.5 AV	54.0	-19.5	1.67 H	7	19.9	14.6
7	17865.00	56.7 PK	74.0	-17.3	1.72 H	32	30.8	25.9
8	17865.00	44.4 AV	54.0	-9.6	1.72 H	32	18.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

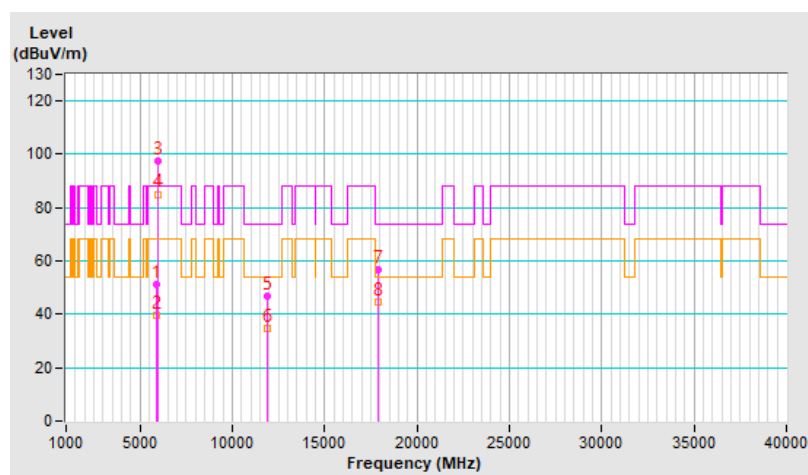


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.8 PK	88.2	-37.4	1.29 V	53	45.2	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.29 V	53	33.8	5.6
3	*5955.00	100.0 PK			1.29 V	53	94.5	5.5
4	*5955.00	88.3 AV			1.29 V	53	82.8	5.5
5	11910.00	46.0 PK	74.0	-28.0	1.61 V	10	31.4	14.6
6	11910.00	34.0 AV	54.0	-20.0	1.61 V	10	19.4	14.6
7	17865.00	56.7 PK	74.0	-17.3	1.78 V	39	30.8	25.9
8	17865.00	44.5 AV	54.0	-9.5	1.78 V	39	18.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

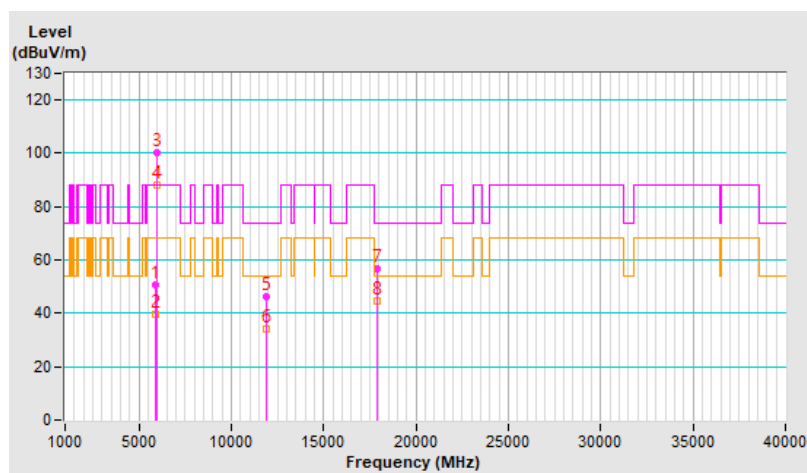


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.9 PK			1.15 H	175	90.1	6.8
2	*6415.00	84.6 AV			1.15 H	175	77.8	6.8
3	#12830.00	47.1 PK	88.2	-41.1	1.61 H	18	32.0	15.1
4	#12830.00	34.7 AV	68.2	-33.5	1.61 H	18	19.6	15.1
5	19245.00	56.2 PK	74.0	-17.8	1.68 H	25	60.8	-4.6
6	19245.00	44.0 AV	54.0	-10.0	1.68 H	25	48.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

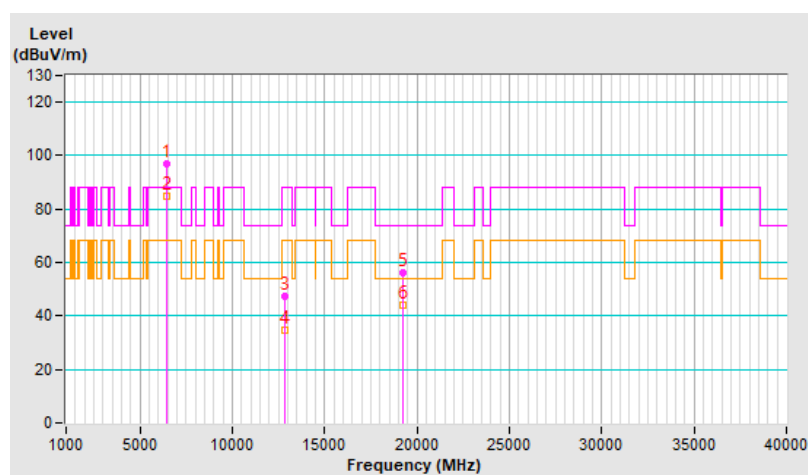


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	99.8 PK			1.27 V	60	93.0	6.8
2	*6415.00	87.8 AV			1.27 V	60	81.0	6.8
3	#12830.00	46.1 PK	88.2	-42.1	1.63 V	12	31.0	15.1
4	#12830.00	34.3 AV	68.2	-33.9	1.63 V	12	19.2	15.1
5	19245.00	56.8 PK	74.0	-17.2	1.73 V	40	61.4	-4.6
6	19245.00	44.5 AV	54.0	-9.5	1.73 V	40	49.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

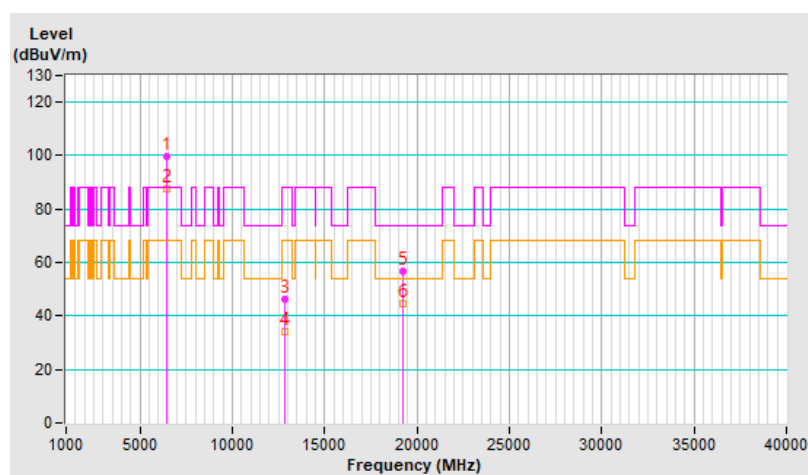


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	97.9 PK			1.22 H	164	91.0	6.9
2	*6435.00	85.5 AV			1.22 H	164	78.6	6.9
3	#12870.00	47.0 PK	88.2	-41.2	1.61 H	20	31.8	15.2
4	#12870.00	34.5 AV	68.2	-33.7	1.61 H	20	19.3	15.2
5	19305.00	56.4 PK	74.0	-17.6	1.78 H	30	60.9	-4.5
6	19305.00	44.0 AV	54.0	-10.0	1.78 H	30	48.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

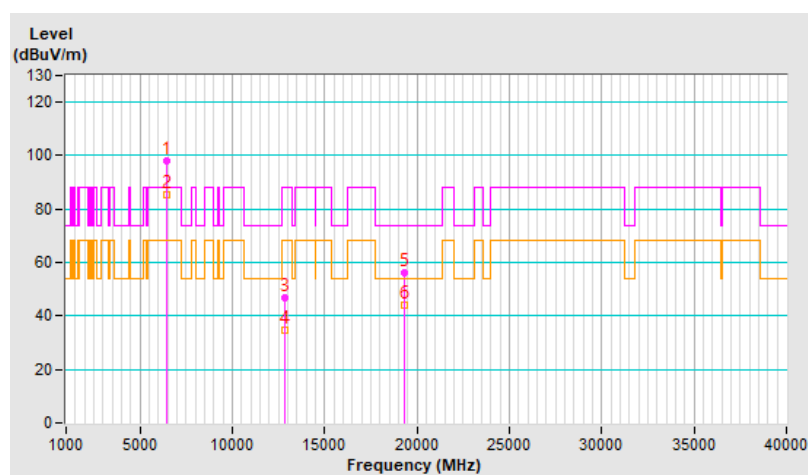


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.0 PK			1.30 V	38	93.1	6.9
2	*6435.00	88.5 AV			1.30 V	38	81.6	6.9
3	#12870.00	46.1 PK	88.2	-42.1	1.66 V	0	30.9	15.2
4	#12870.00	34.2 AV	68.2	-34.0	1.66 V	0	19.0	15.2
5	19305.00	56.4 PK	74.0	-17.6	1.75 V	41	60.9	-4.5
6	19305.00	44.1 AV	54.0	-9.9	1.75 V	41	48.6	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

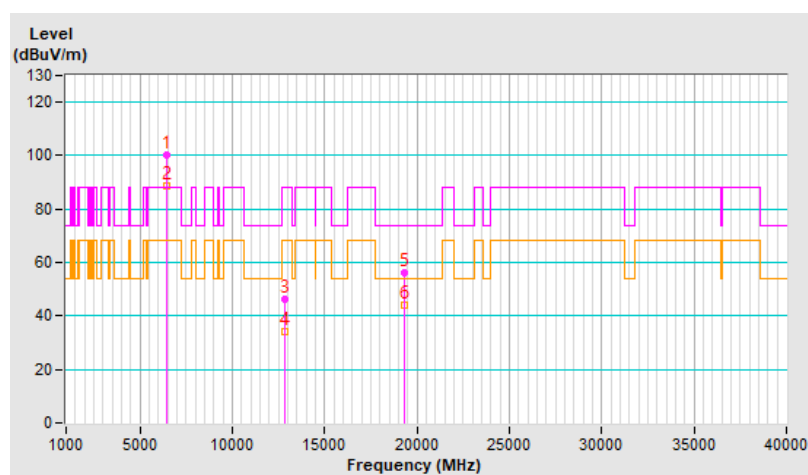


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	97.6 PK			1.14 H	155	90.4	7.2
2	*6515.00	85.0 AV			1.14 H	155	77.8	7.2
3	#13030.00	47.0 PK	88.2	-41.2	1.61 H	10	32.0	15.0
4	#13030.00	34.6 AV	68.2	-33.6	1.61 H	10	19.6	15.0
5	19545.00	57.0 PK	74.0	-17.0	1.71 H	23	61.8	-4.8
6	19545.00	44.9 AV	54.0	-9.1	1.71 H	23	49.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

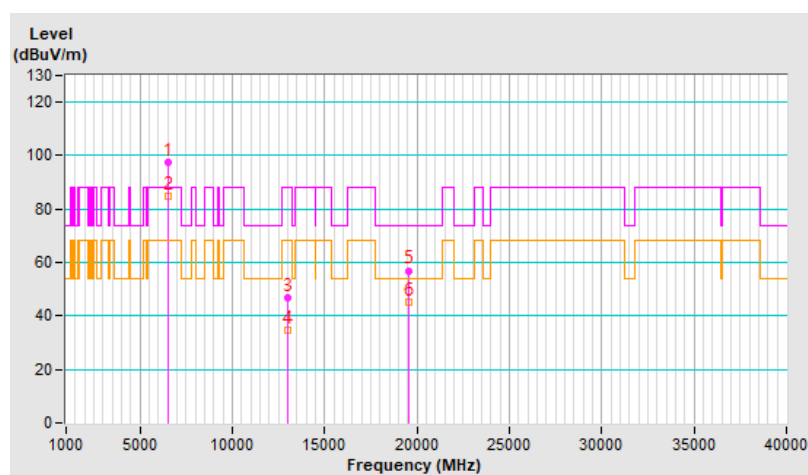


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.1 PK			1.31 V	65	92.9	7.2
2	*6515.00	88.1 AV			1.31 V	65	80.9	7.2
3	#13030.00	46.0 PK	88.2	-42.2	1.58 V	11	31.0	15.0
4	#13030.00	33.8 AV	68.2	-34.4	1.58 V	11	18.8	15.0
5	19545.00	56.7 PK	74.0	-17.3	1.81 V	40	61.5	-4.8
6	19545.00	44.4 AV	54.0	-9.6	1.81 V	40	49.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

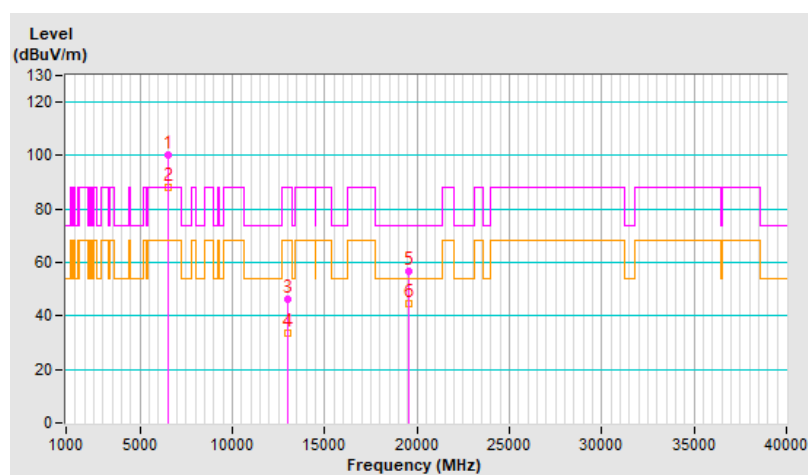


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.4 PK			1.22 H	149	90.0	7.4
2	*6535.00	84.9 AV			1.22 H	149	77.5	7.4
3	#13070.00	46.2 PK	88.2	-42.0	1.72 H	9	31.1	15.1
4	#13070.00	34.2 AV	68.2	-34.0	1.72 H	9	19.1	15.1
5	19605.00	56.5 PK	74.0	-17.5	1.73 H	28	61.3	-4.8
6	19605.00	44.2 AV	54.0	-9.8	1.73 H	28	49.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

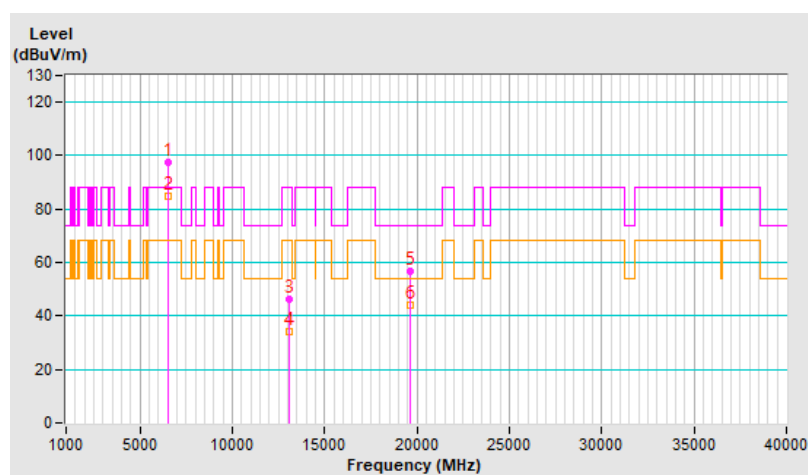


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	99.9 PK			1.29 V	45	92.5	7.4
2	*6535.00	88.4 AV			1.29 V	45	81.0	7.4
3	#13070.00	46.1 PK	88.2	-42.1	1.65 V	17	31.0	15.1
4	#13070.00	34.4 AV	68.2	-33.8	1.65 V	17	19.3	15.1
5	19605.00	57.0 PK	74.0	-17.0	1.72 V	37	61.8	-4.8
6	19605.00	44.9 AV	54.0	-9.1	1.72 V	37	49.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

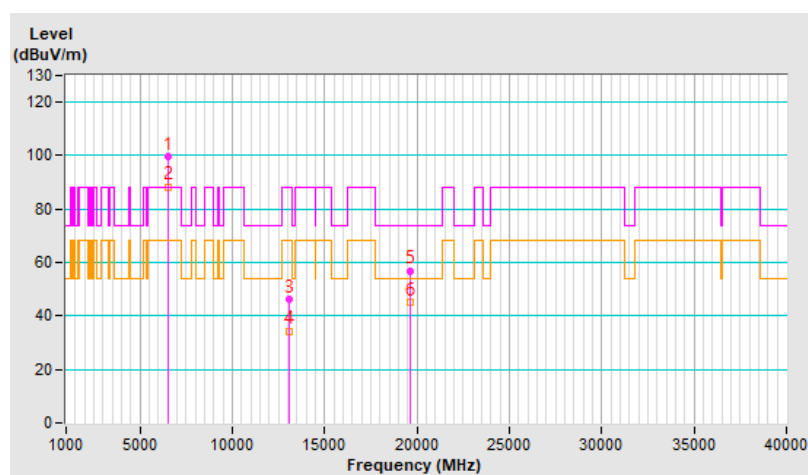


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	97.8 PK			1.22 H	179	89.6	8.2
2	*6855.00	85.4 AV			1.22 H	179	77.2	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.70 H	21	30.7	16.3
4	#13710.00	34.9 AV	68.2	-33.3	1.70 H	21	18.6	16.3
5	20565.00	56.1 PK	74.0	-17.9	1.66 H	39	59.8	-3.7
6	20565.00	44.1 AV	54.0	-9.9	1.66 H	39	47.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

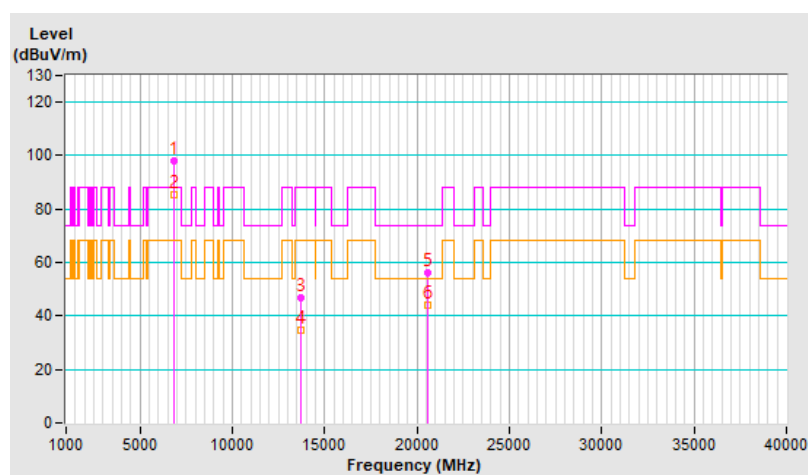


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	99.8 PK			1.31 V	64	91.6	8.2
2	*6855.00	88.3 AV			1.31 V	64	80.1	8.2
3	#13710.00	46.0 PK	88.2	-42.2	1.63 V	23	29.7	16.3
4	#13710.00	34.2 AV	68.2	-34.0	1.63 V	23	17.9	16.3
5	20565.00	56.7 PK	74.0	-17.3	1.76 V	51	60.4	-3.7
6	20565.00	44.5 AV	54.0	-9.5	1.76 V	51	48.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

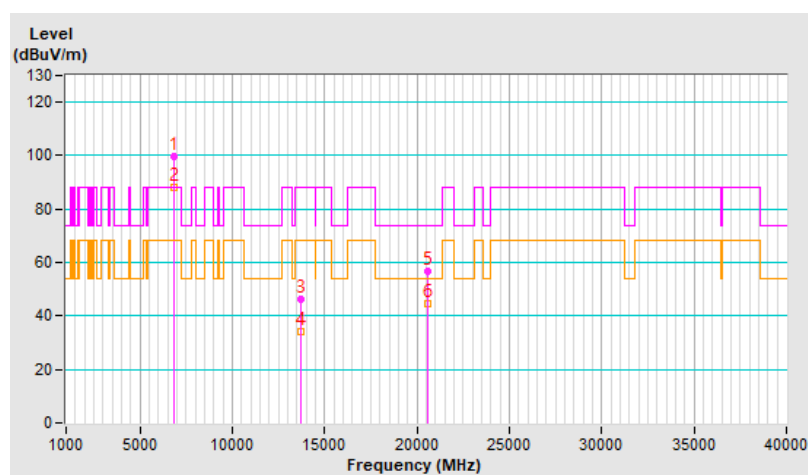


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	97.9 PK			1.20 H	171	89.6	8.3
2	*6875.00	85.6 AV			1.20 H	171	77.3	8.3
3	#13750.00	46.4 PK	88.2	-41.8	1.63 H	11	29.9	16.5
4	#13750.00	34.3 AV	68.2	-33.9	1.63 H	11	17.8	16.5
5	20625.00	56.6 PK	74.0	-17.4	1.74 H	31	60.3	-3.7
6	20625.00	44.4 AV	54.0	-9.6	1.74 H	31	48.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

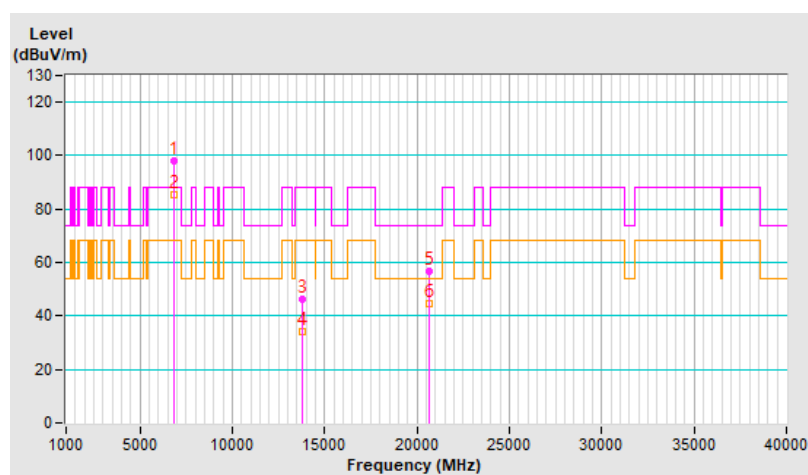


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.4 PK			1.32 V	49	92.1	8.3
2	*6875.00	88.6 AV			1.32 V	49	80.3	8.3
3	#13750.00	46.5 PK	88.2	-41.7	1.57 V	25	30.0	16.5
4	#13750.00	34.4 AV	68.2	-33.8	1.57 V	25	17.9	16.5
5	20625.00	56.4 PK	74.0	-17.6	1.84 V	36	60.1	-3.7
6	20625.00	44.2 AV	54.0	-9.8	1.84 V	36	47.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

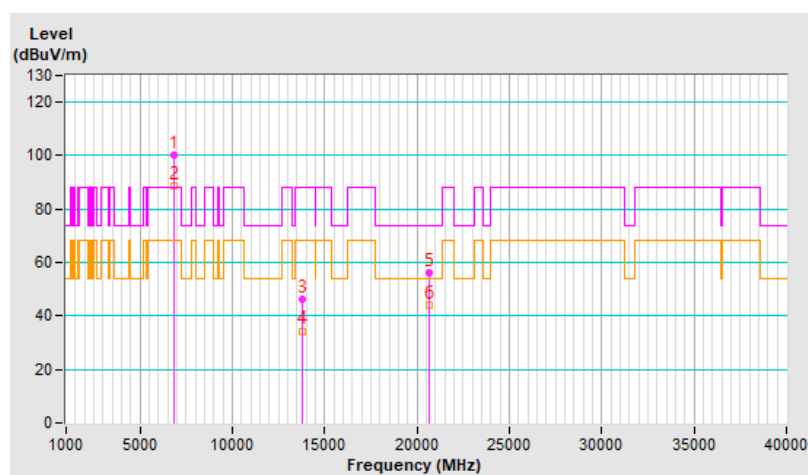


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.9 PK			2.25 H	201	89.9	10.0
2	*7115.00	88.8 AV			2.25 H	201	78.8	10.0
3	#7125.00	55.8 PK	88.2	-32.4	2.25 H	201	45.7	10.1
4	#7125.00	44.2 AV	68.2	-24.0	2.25 H	201	34.1	10.1
5	#14230.00	47.2 PK	88.2	-41.0	1.62 H	18	28.5	18.7
6	#14230.00	34.8 AV	68.2	-33.4	1.62 H	18	16.1	18.7
7	21345.00	56.7 PK	74.0	-17.3	1.69 H	47	59.2	-2.5
8	21345.00	44.1 AV	54.0	-9.9	1.69 H	47	46.6	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

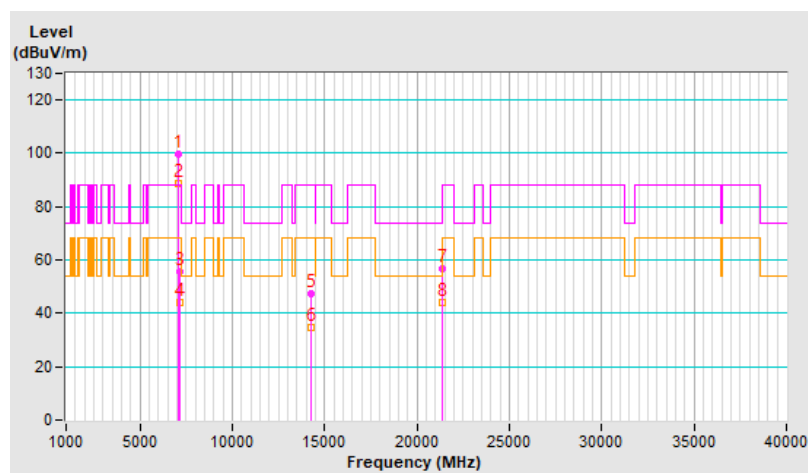


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.8 PK			1.46 V	333	85.8	10.0
2	*7115.00	84.8 AV			1.46 V	333	74.8	10.0
3	#7125.00	58.2 PK	88.2	-30.0	1.46 V	333	48.1	10.1
4	#7125.00	44.1 AV	68.2	-24.1	1.46 V	333	34.0	10.1
5	#14230.00	46.1 PK	88.2	-42.1	1.56 V	21	27.4	18.7
6	#14230.00	34.2 AV	68.2	-34.0	1.56 V	21	15.5	18.7
7	21345.00	57.0 PK	74.0	-17.0	1.75 V	54	59.5	-2.5
8	21345.00	44.6 AV	54.0	-9.4	1.75 V	54	47.1	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

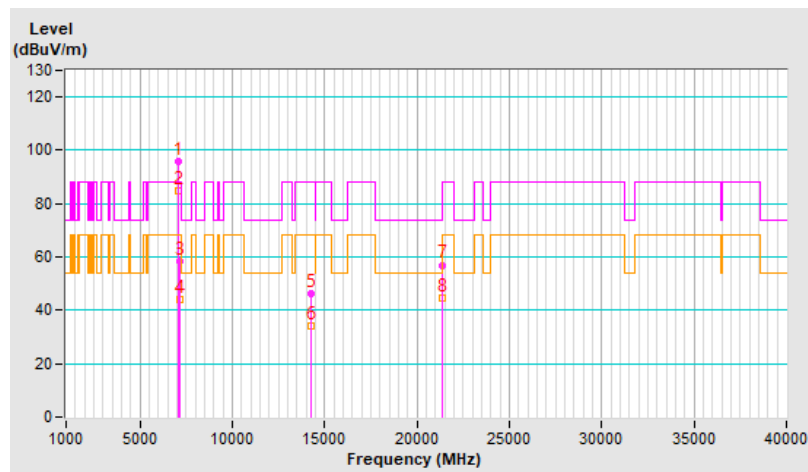


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.40 H	166	46.1	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.40 H	166	33.8	5.6
3	*5955.00	96.6 PK			1.40 H	166	91.1	5.5
4	*5955.00	83.2 AV			1.40 H	166	77.7	5.5
5	11910.00	46.8 PK	74.0	-27.2	1.63 H	18	32.2	14.6
6	11910.00	34.3 AV	54.0	-19.7	1.63 H	18	19.7	14.6
7	17865.00	56.9 PK	74.0	-17.1	1.66 H	20	31.0	25.9
8	17865.00	44.8 AV	54.0	-9.2	1.66 H	20	18.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

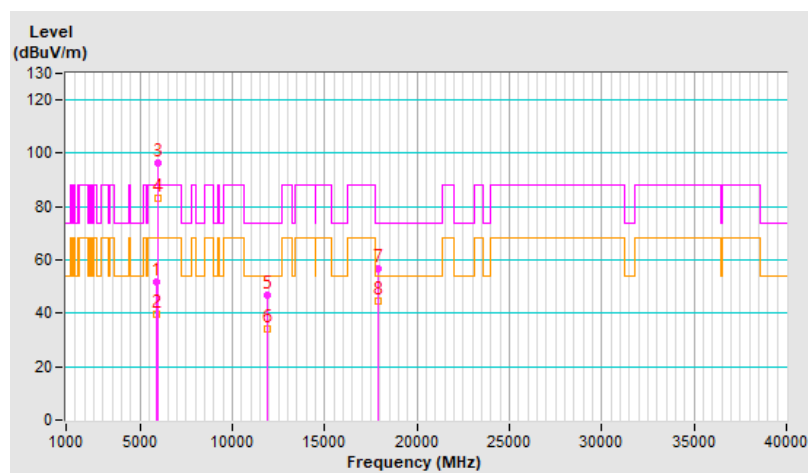


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.50 V	315	45.8	5.6
2	#5925.00	39.3 AV	68.2	-28.9	1.50 V	315	33.7	5.6
3	*5955.00	99.3 PK			1.50 V	315	93.8	5.5
4	*5955.00	88.0 AV			1.50 V	315	82.5	5.5
5	11910.00	45.4 PK	74.0	-28.6	1.66 V	9	30.8	14.6
6	11910.00	33.6 AV	54.0	-20.4	1.66 V	9	19.0	14.6
7	17865.00	56.1 PK	74.0	-17.9	1.81 V	35	30.2	25.9
8	17865.00	44.0 AV	54.0	-10.0	1.81 V	35	18.1	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

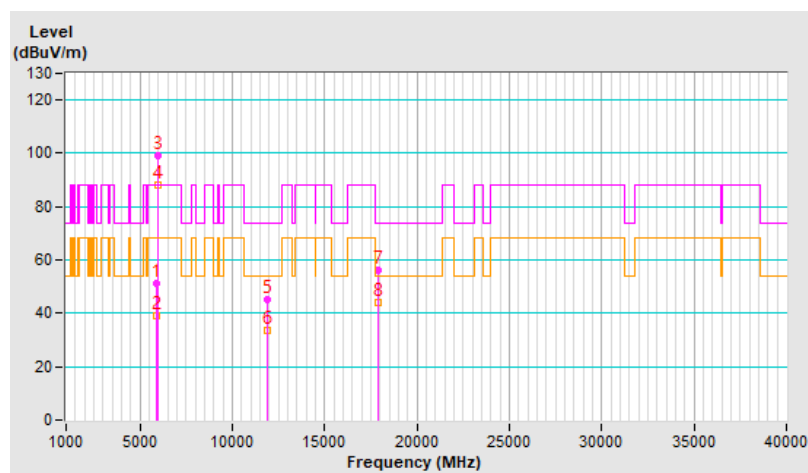


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	96.7 PK			1.45 H	170	89.9	6.8
2	*6415.00	83.6 AV			1.45 H	170	76.8	6.8
3	#12830.00	46.3 PK	88.2	-41.9	1.63 H	10	31.2	15.1
4	#12830.00	34.1 AV	68.2	-34.1	1.63 H	10	19.0	15.1
5	19245.00	56.5 PK	74.0	-17.5	1.67 H	44	61.1	-4.6
6	19245.00	44.0 AV	54.0	-10.0	1.67 H	44	48.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

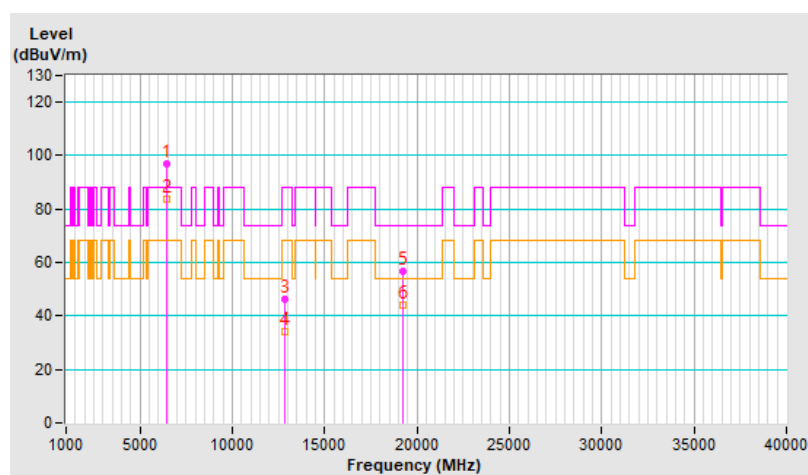


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	99.4 PK			1.49 V	307	92.6	6.8
2	*6415.00	88.0 AV			1.49 V	307	81.2	6.8
3	#12830.00	46.1 PK	88.2	-42.1	1.60 V	16	31.0	15.1
4	#12830.00	34.4 AV	68.2	-33.8	1.60 V	16	19.3	15.1
5	19245.00	56.2 PK	74.0	-17.8	1.81 V	30	60.8	-4.6
6	19245.00	44.1 AV	54.0	-9.9	1.81 V	30	48.7	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

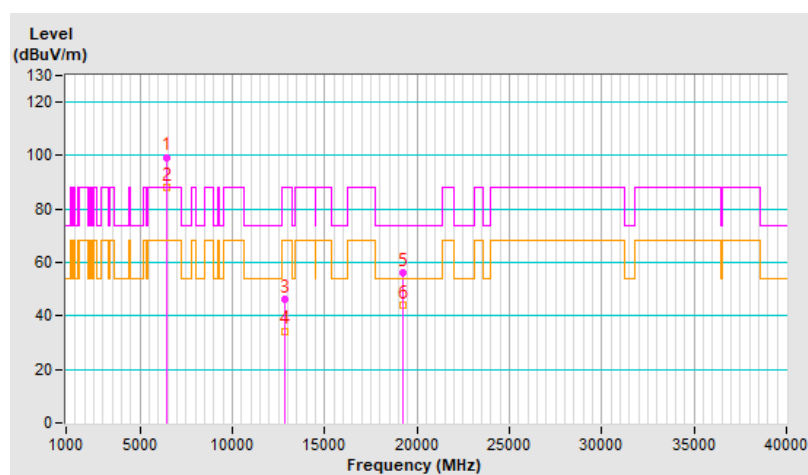


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	97.0 PK			1.34 H	163	90.1	6.9
2	*6435.00	83.3 AV			1.34 H	163	76.4	6.9
3	#12870.00	46.5 PK	88.2	-41.7	1.63 H	20	31.3	15.2
4	#12870.00	34.5 AV	68.2	-33.7	1.63 H	20	19.3	15.2
5	19305.00	56.4 PK	74.0	-17.6	1.77 H	35	60.9	-4.5
6	19305.00	44.0 AV	54.0	-10.0	1.77 H	35	48.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

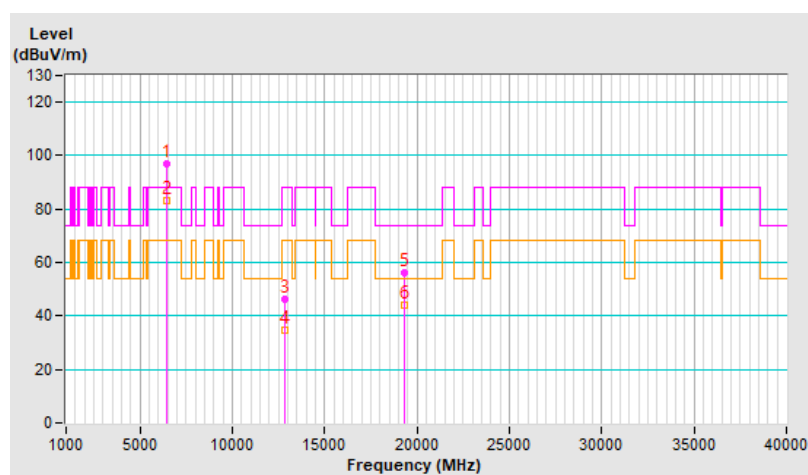


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.9 PK			1.46 V	320	93.0	6.9
2	*6435.00	88.4 AV			1.46 V	320	81.5	6.9
3	#12870.00	46.5 PK	88.2	-41.7	1.65 V	13	31.3	15.2
4	#12870.00	34.4 AV	68.2	-33.8	1.65 V	13	19.2	15.2
5	19305.00	56.3 PK	74.0	-17.7	1.80 V	53	60.8	-4.5
6	19305.00	44.2 AV	54.0	-9.8	1.80 V	53	48.7	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

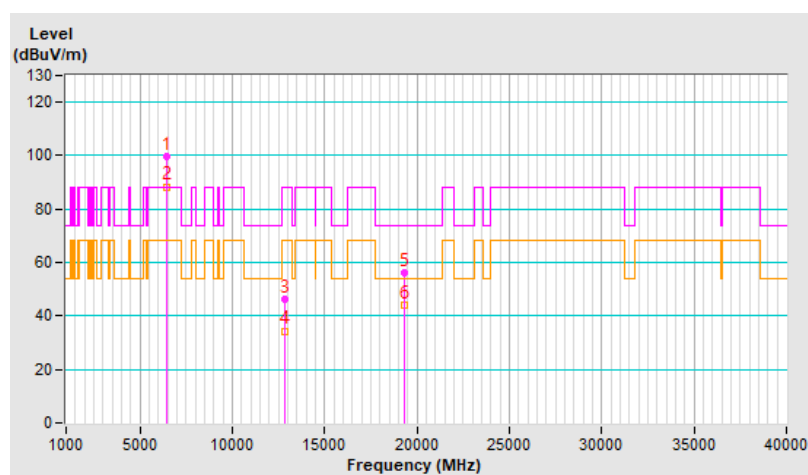


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.2 PK			1.46 H	166	89.0	7.2
2	*6515.00	82.8 AV			1.46 H	166	75.6	7.2
3	#13030.00	47.0 PK	88.2	-41.2	1.71 H	14	32.0	15.0
4	#13030.00	34.8 AV	68.2	-33.4	1.71 H	14	19.8	15.0
5	19545.00	56.9 PK	74.0	-17.1	1.73 H	39	61.7	-4.8
6	19545.00	44.7 AV	54.0	-9.3	1.73 H	39	49.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

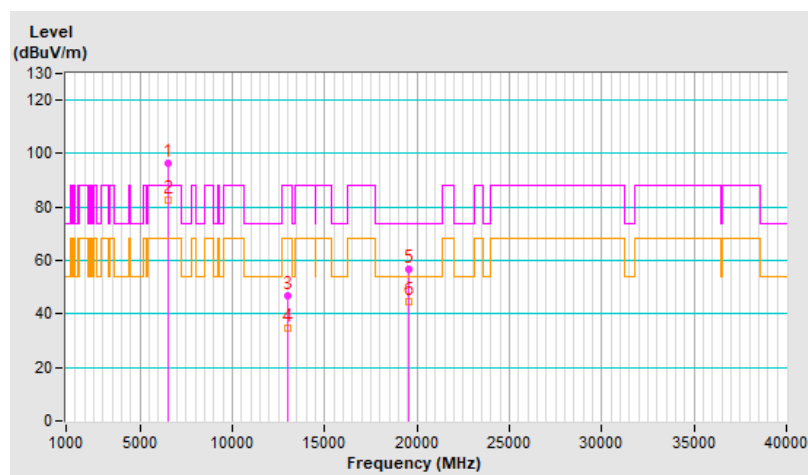


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	99.1 PK			1.53 V	310	91.9	7.2
2	*6515.00	87.9 AV			1.53 V	310	80.7	7.2
3	#13030.00	46.6 PK	88.2	-41.6	1.57 V	24	31.6	15.0
4	#13030.00	34.4 AV	68.2	-33.8	1.57 V	24	19.4	15.0
5	19545.00	56.6 PK	74.0	-17.4	1.81 V	41	61.4	-4.8
6	19545.00	44.5 AV	54.0	-9.5	1.81 V	41	49.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

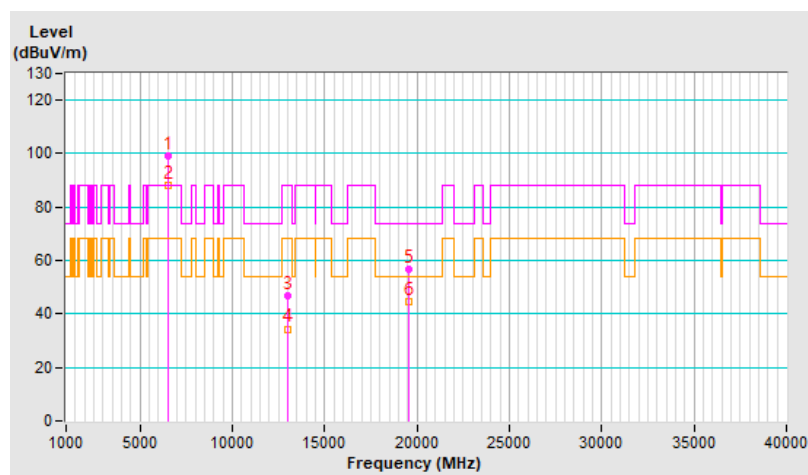


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	97.0 PK			1.44 H	165	89.6	7.4
2	*6535.00	83.6 AV			1.44 H	165	76.2	7.4
3	#13070.00	46.3 PK	88.2	-41.9	1.65 H	21	31.2	15.1
4	#13070.00	34.0 AV	68.2	-34.2	1.65 H	21	18.9	15.1
5	19605.00	56.9 PK	74.0	-17.1	1.66 H	21	61.7	-4.8
6	19605.00	44.9 AV	54.0	-9.1	1.66 H	21	49.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

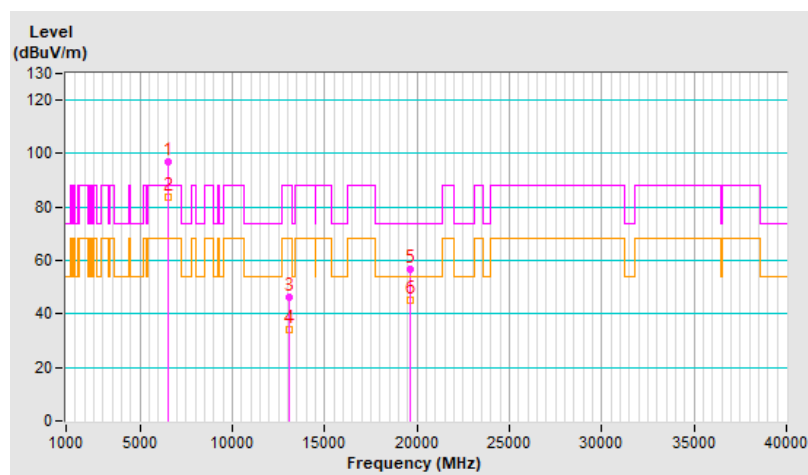


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	99.0 PK			1.55 V	316	91.6	7.4
2	*6535.00	88.0 AV			1.55 V	316	80.6	7.4
3	#13070.00	45.9 PK	88.2	-42.3	1.67 V	5	30.8	15.1
4	#13070.00	33.8 AV	68.2	-34.4	1.67 V	5	18.7	15.1
5	19605.00	56.7 PK	74.0	-17.3	1.84 V	53	61.5	-4.8
6	19605.00	44.6 AV	54.0	-9.4	1.84 V	53	49.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

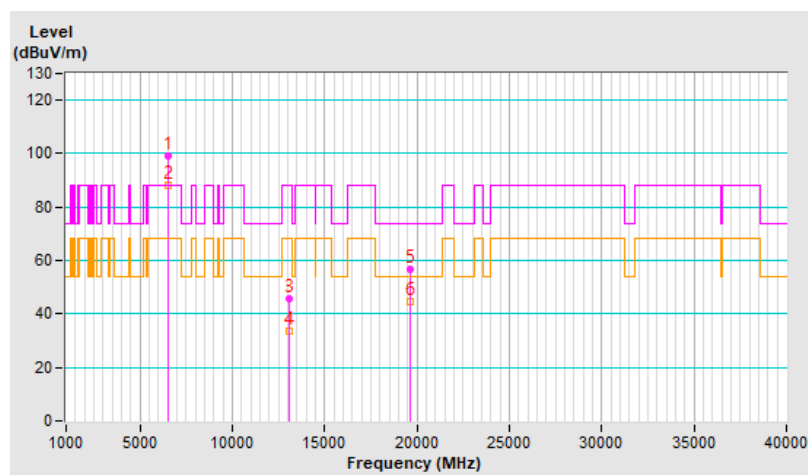


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	96.5 PK			1.40 H	153	88.3	8.2
2	*6855.00	83.1 AV			1.40 H	153	74.9	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.67 H	18	30.7	16.3
4	#13710.00	34.8 AV	68.2	-33.4	1.67 H	18	18.5	16.3
5	20565.00	56.5 PK	74.0	-17.5	1.77 H	32	60.2	-3.7
6	20565.00	44.2 AV	54.0	-9.8	1.77 H	32	47.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

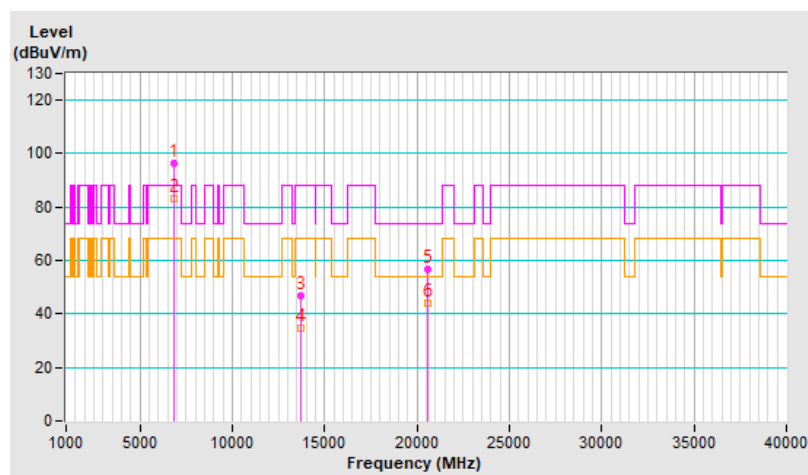


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	99.4 PK			1.51 V	318	91.2	8.2
2	*6855.00	88.1 AV			1.51 V	318	79.9	8.2
3	#13710.00	46.3 PK	88.2	-41.9	1.65 V	2	30.0	16.3
4	#13710.00	34.5 AV	68.2	-33.7	1.65 V	2	18.2	16.3
5	20565.00	56.7 PK	74.0	-17.3	1.83 V	53	60.4	-3.7
6	20565.00	44.2 AV	54.0	-9.8	1.83 V	53	47.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

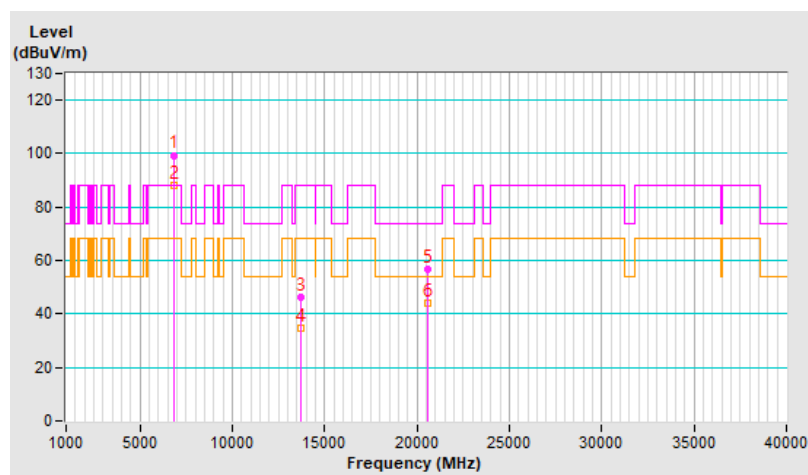


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.3 PK			1.35 H	171	88.0	8.3
2	*6875.00	82.9 AV			1.35 H	171	74.6	8.3
3	#13750.00	46.8 PK	88.2	-41.4	1.73 H	22	30.3	16.5
4	#13750.00	34.5 AV	68.2	-33.7	1.73 H	22	18.0	16.5
5	20625.00	57.2 PK	74.0	-16.8	1.69 H	41	60.9	-3.7
6	20625.00	44.9 AV	54.0	-9.1	1.69 H	41	48.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

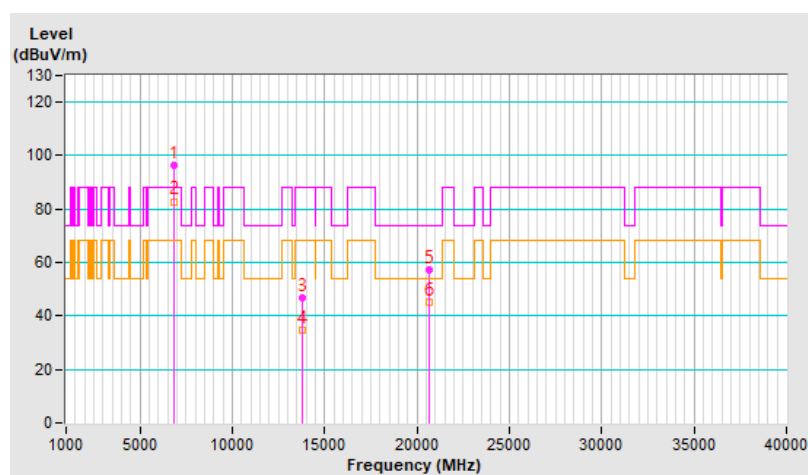


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.7 PK			1.56 V	313	91.4	8.3
2	*6875.00	88.3 AV			1.56 V	313	80.0	8.3
3	#13750.00	45.6 PK	88.2	-42.6	1.60 V	17	29.1	16.5
4	#13750.00	33.9 AV	68.2	-34.3	1.60 V	17	17.4	16.5
5	20625.00	56.7 PK	74.0	-17.3	1.84 V	43	60.4	-3.7
6	20625.00	44.5 AV	54.0	-9.5	1.84 V	43	48.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

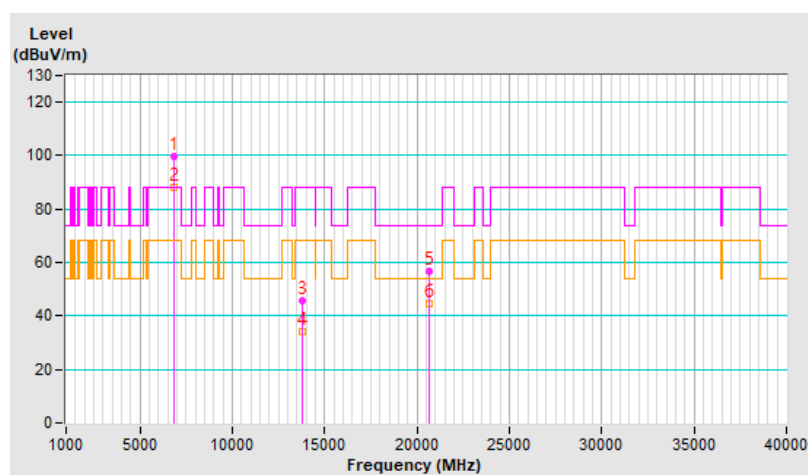


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.8 PK			2.27 H	203	89.8	10.0
2	*7115.00	89.9 AV			2.27 H	203	79.9	10.0
3	#7125.00	58.7 PK	88.2	-29.5	2.27 H	203	48.6	10.1
4	#7125.00	50.2 AV	68.2	-18.0	2.27 H	203	40.1	10.1
5	#14230.00	46.1 PK	88.2	-42.1	1.61 H	17	27.4	18.7
6	#14230.00	34.2 AV	68.2	-34.0	1.61 H	17	15.5	18.7
7	21345.00	56.9 PK	74.0	-17.1	1.71 H	35	59.4	-2.5
8	21345.00	44.4 AV	54.0	-9.6	1.71 H	35	46.9	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

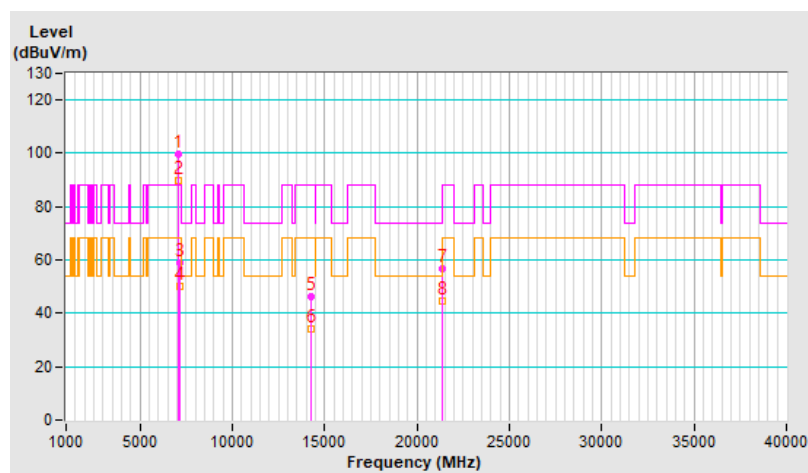


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.0 PK			1.13 V	320	87.0	10.0
2	*7115.00	86.0 AV			1.13 V	320	76.0	10.0
3	#7125.00	58.5 PK	88.2	-29.7	1.13 V	320	48.4	10.1
4	#7125.00	48.6 AV	68.2	-19.6	1.13 V	320	38.5	10.1
5	#14230.00	46.5 PK	88.2	-41.7	1.59 V	25	27.8	18.7
6	#14230.00	34.5 AV	68.2	-33.7	1.59 V	25	15.8	18.7
7	21345.00	56.7 PK	74.0	-17.3	1.75 V	52	59.2	-2.5
8	21345.00	44.3 AV	54.0	-9.7	1.75 V	52	46.8	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

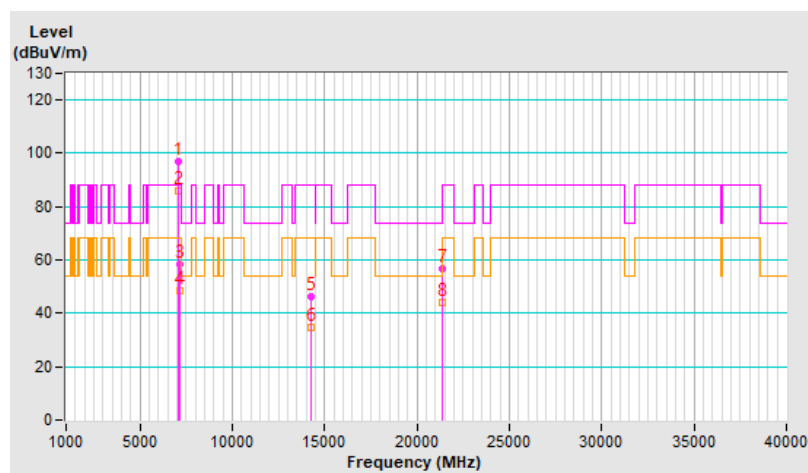


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.3 PK	88.2	-36.9	1.26 H	166	45.7	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.26 H	166	34.2	5.6
3	*5985.00	97.9 PK			1.26 H	166	92.4	5.5
4	*5985.00	86.4 AV			1.26 H	166	80.9	5.5
5	11970.00	46.4 PK	74.0	-27.6	1.70 H	16	31.9	14.5
6	11970.00	34.2 AV	54.0	-19.8	1.70 H	16	19.7	14.5
7	17955.00	56.9 PK	74.0	-17.1	1.74 H	44	28.6	28.3
8	17955.00	44.8 AV	54.0	-9.2	1.74 H	44	16.5	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

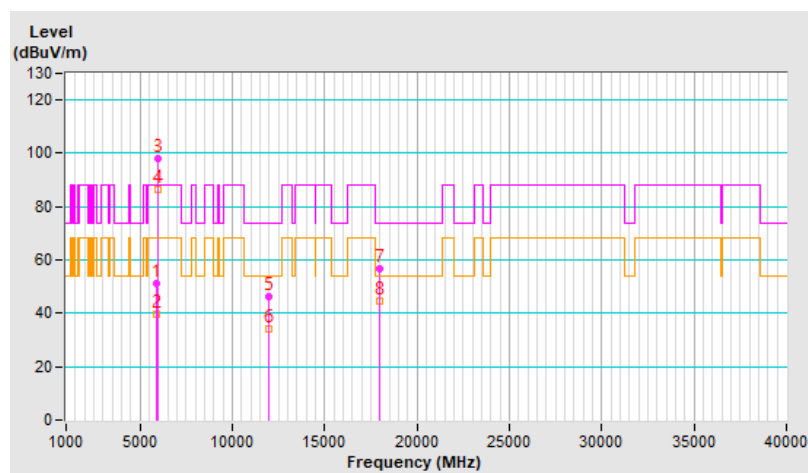


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.6 PK	88.2	-36.6	1.50 V	46	46.0	5.6
2	#5925.00	40.6 AV	68.2	-27.6	1.50 V	46	35.0	5.6
3	*5985.00	99.6 PK			1.50 V	46	94.1	5.5
4	*5985.00	88.6 AV			1.50 V	46	83.1	5.5
5	11970.00	45.6 PK	74.0	-28.4	1.61 V	13	31.1	14.5
6	11970.00	33.7 AV	54.0	-20.3	1.61 V	13	19.2	14.5
7	17955.00	57.0 PK	74.0	-17.0	1.79 V	49	28.7	28.3
8	17955.00	44.8 AV	54.0	-9.2	1.79 V	49	16.5	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

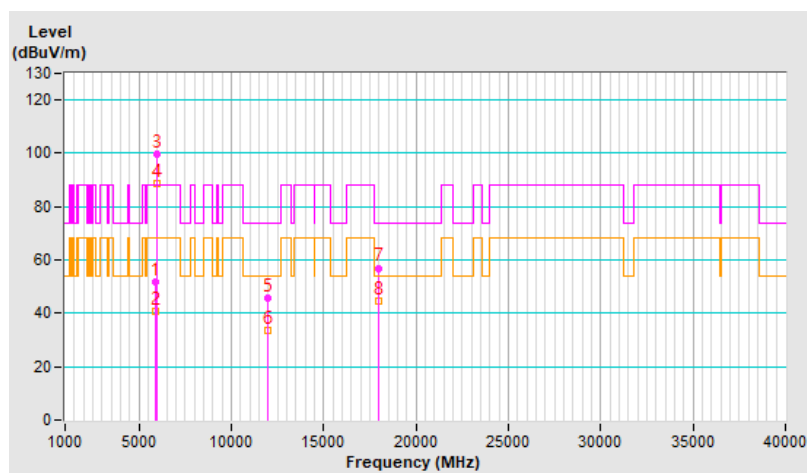


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	98.5 PK			1.31 H	169	91.9	6.6
2	*6385.00	86.8 AV			1.31 H	169	80.2	6.6
3	#12770.00	46.4 PK	88.2	-41.8	1.67 H	18	31.5	14.9
4	#12770.00	34.3 AV	68.2	-33.9	1.67 H	18	19.4	14.9
5	19155.00	56.8 PK	74.0	-17.2	1.74 H	30	61.5	-4.7
6	19155.00	44.6 AV	54.0	-9.4	1.74 H	30	49.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

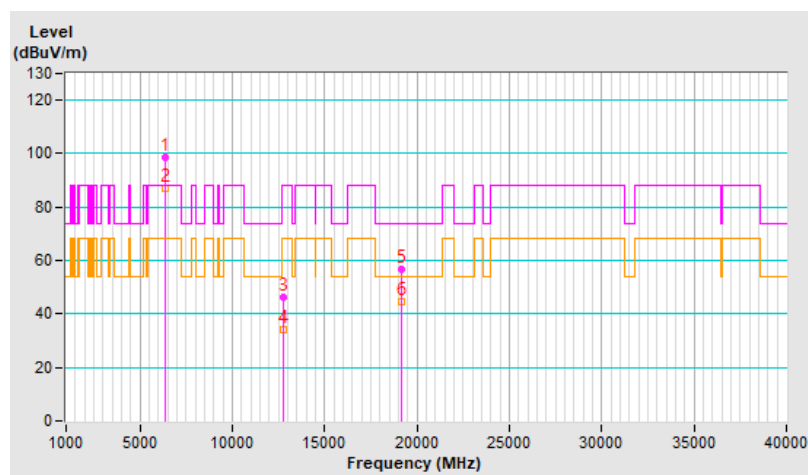


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	99.7 PK			1.56 V	46	93.1	6.6
2	*6385.00	88.4 AV			1.56 V	46	81.8	6.6
3	#12770.00	45.9 PK	88.2	-42.3	1.61 V	23	31.0	14.9
4	#12770.00	33.8 AV	68.2	-34.4	1.61 V	23	18.9	14.9
5	19155.00	57.1 PK	74.0	-16.9	1.82 V	26	61.8	-4.7
6	19155.00	44.9 AV	54.0	-9.1	1.82 V	26	49.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

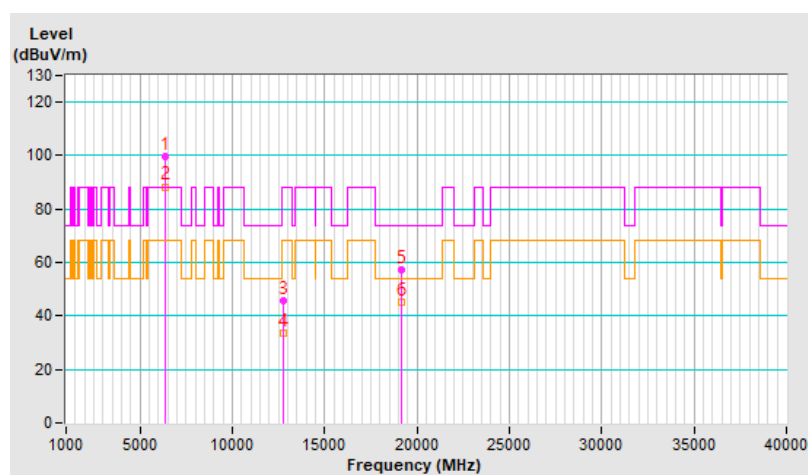


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	97.8 PK			1.31 H	169	90.8	7.0
2	*6465.00	86.4 AV			1.31 H	169	79.4	7.0
3	#12930.00	47.1 PK	88.2	-41.1	1.65 H	18	31.9	15.2
4	#12930.00	34.9 AV	68.2	-33.3	1.65 H	18	19.7	15.2
5	19395.00	56.9 PK	74.0	-17.1	1.73 H	30	61.4	-4.5
6	19395.00	44.5 AV	54.0	-9.5	1.73 H	30	49.0	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

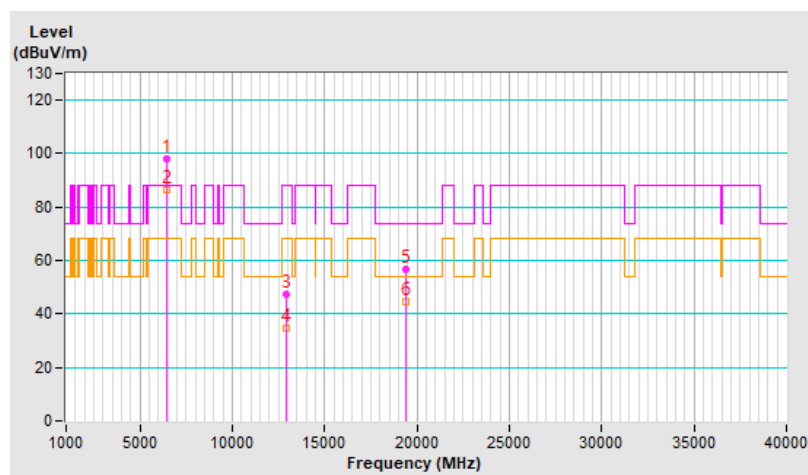


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	99.7 PK			1.55 V	55	92.7	7.0
2	*6465.00	88.6 AV			1.55 V	55	81.6	7.0
3	#12930.00	46.2 PK	88.2	-42.0	1.56 V	20	31.0	15.2
4	#12930.00	34.1 AV	68.2	-34.1	1.56 V	20	18.9	15.2
5	19395.00	56.1 PK	74.0	-17.9	1.73 V	35	60.6	-4.5
6	19395.00	44.1 AV	54.0	-9.9	1.73 V	35	48.6	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

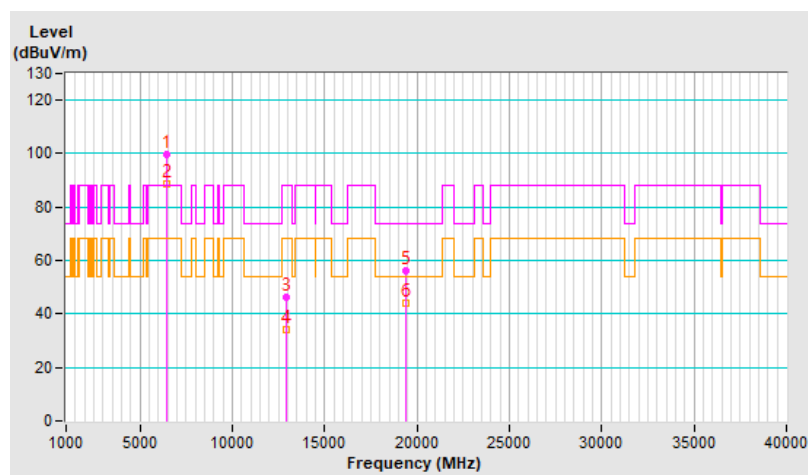


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	98.1 PK			1.26 H	156	90.7	7.4
2	*6545.00	86.8 AV			1.26 H	156	79.4	7.4
3	#13090.00	47.1 PK	88.2	-41.1	1.64 H	22	31.9	15.2
4	#13090.00	34.8 AV	68.2	-33.4	1.64 H	22	19.6	15.2
5	19635.00	56.4 PK	74.0	-17.6	1.73 H	42	61.1	-4.7
6	19635.00	44.2 AV	54.0	-9.8	1.73 H	42	48.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

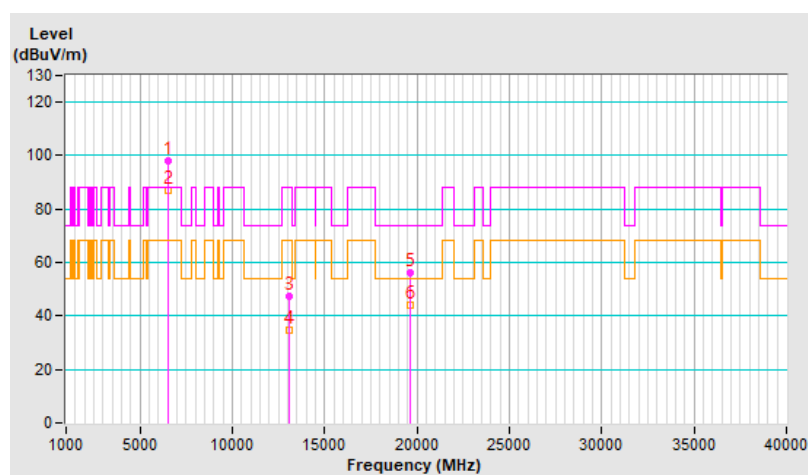


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	99.9 PK			1.44 V	42	92.5	7.4
2	*6545.00	88.7 AV			1.44 V	42	81.3	7.4
3	#13090.00	46.5 PK	88.2	-41.7	1.57 V	13	31.3	15.2
4	#13090.00	34.3 AV	68.2	-33.9	1.57 V	13	19.1	15.2
5	19635.00	56.3 PK	74.0	-17.7	1.78 V	45	61.0	-4.7
6	19635.00	44.2 AV	54.0	-9.8	1.78 V	45	48.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

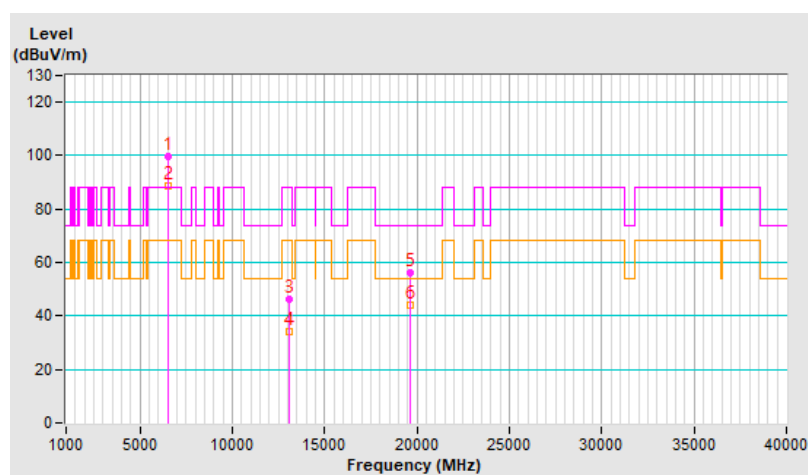


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	97.3 PK			1.30 H	167	89.5	7.8
2	*6625.00	86.1 AV			1.30 H	167	78.3	7.8
3	13250.00	46.2 PK	74.0	-27.8	1.67 H	2	30.8	15.4
4	13250.00	34.0 AV	54.0	-20.0	1.67 H	2	18.6	15.4
5	19875.00	56.1 PK	74.0	-17.9	1.70 H	17	60.6	-4.5
6	19875.00	44.0 AV	54.0	-10.0	1.70 H	17	48.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

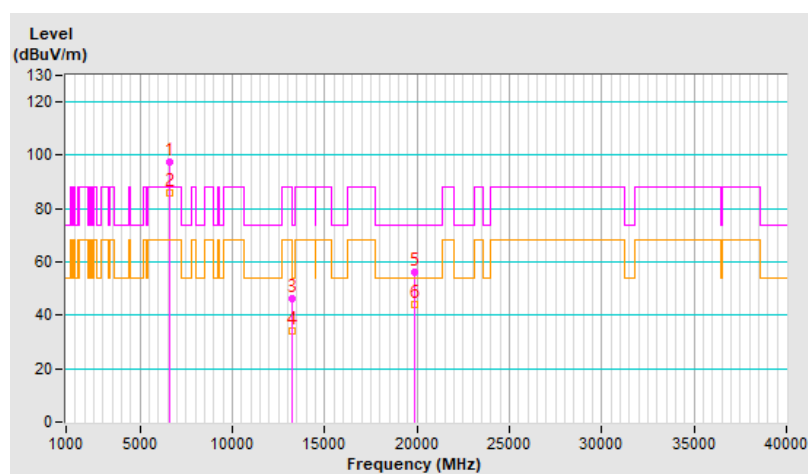


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	99.1 PK			1.44 V	48	91.3	7.8
2	*6625.00	88.3 AV			1.44 V	48	80.5	7.8
3	13250.00	46.0 PK	74.0	-28.0	1.66 V	23	30.6	15.4
4	13250.00	33.8 AV	54.0	-20.2	1.66 V	23	18.4	15.4
5	19875.00	56.4 PK	74.0	-17.6	1.82 V	50	60.9	-4.5
6	19875.00	44.3 AV	54.0	-9.7	1.82 V	50	48.8	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

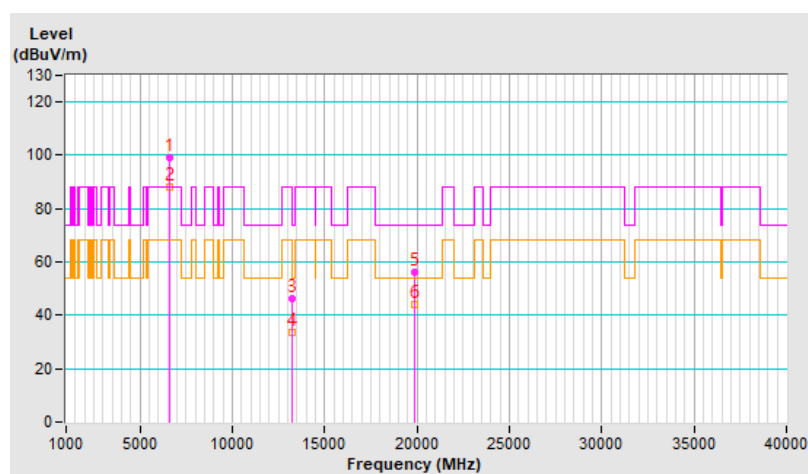


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	97.9 PK			1.27 H	156	90.2	7.7
2	*6785.00	86.6 AV			1.27 H	156	78.9	7.7
3	#13570.00	46.5 PK	88.2	-41.7	1.64 H	12	30.8	15.7
4	#13570.00	34.4 AV	68.2	-33.8	1.64 H	12	18.7	15.7
5	20355.00	57.1 PK	74.0	-16.9	1.76 H	43	60.9	-3.8
6	20355.00	44.7 AV	54.0	-9.3	1.76 H	43	48.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

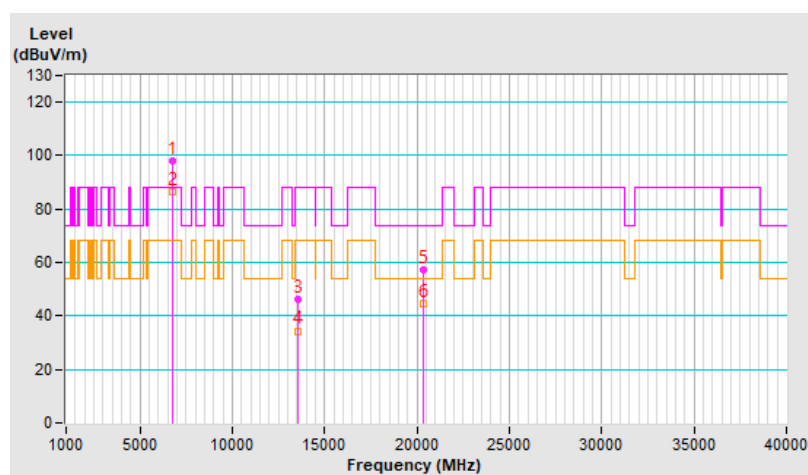


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	99.8 PK			1.53 V	42	92.1	7.7
2	*6785.00	89.0 AV			1.53 V	42	81.3	7.7
3	#13570.00	46.0 PK	88.2	-42.2	1.66 V	11	30.3	15.7
4	#13570.00	34.0 AV	68.2	-34.2	1.66 V	11	18.3	15.7
5	20355.00	56.1 PK	74.0	-17.9	1.82 V	34	59.9	-3.8
6	20355.00	44.1 AV	54.0	-9.9	1.82 V	34	47.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

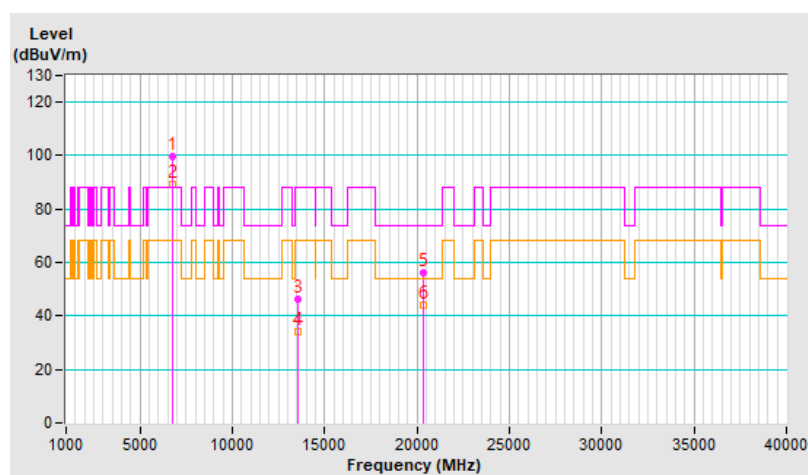


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	97.8 PK			1.28 H	167	89.6	8.2
2	*6865.00	86.2 AV			1.28 H	167	78.0	8.2
3	#13730.00	46.6 PK	88.2	-41.6	1.61 H	10	30.2	16.4
4	#13730.00	34.6 AV	68.2	-33.6	1.61 H	10	18.2	16.4
5	20595.00	56.6 PK	74.0	-17.4	1.75 H	24	60.4	-3.8
6	20595.00	44.1 AV	54.0	-9.9	1.75 H	24	47.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

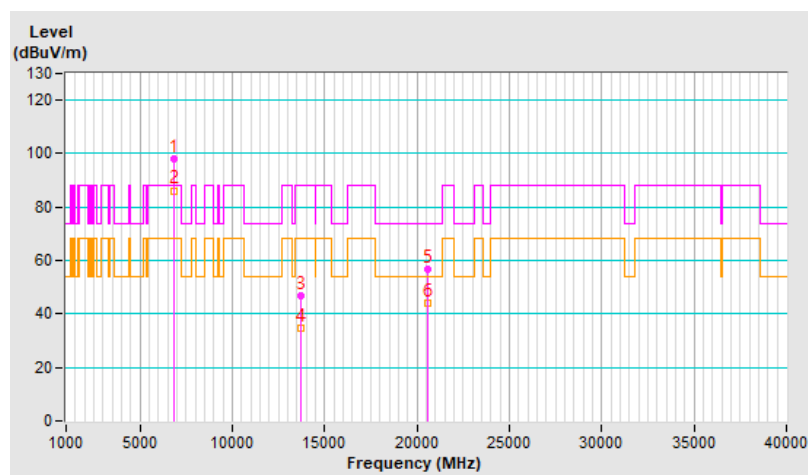


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	99.8 PK			1.52 V	48	91.6	8.2
2	*6865.00	88.8 AV			1.52 V	48	80.6	8.2
3	#13730.00	46.5 PK	88.2	-41.7	1.63 V	16	30.1	16.4
4	#13730.00	34.2 AV	68.2	-34.0	1.63 V	16	17.8	16.4
5	20595.00	57.1 PK	74.0	-16.9	1.73 V	33	60.9	-3.8
6	20595.00	44.9 AV	54.0	-9.1	1.73 V	33	48.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

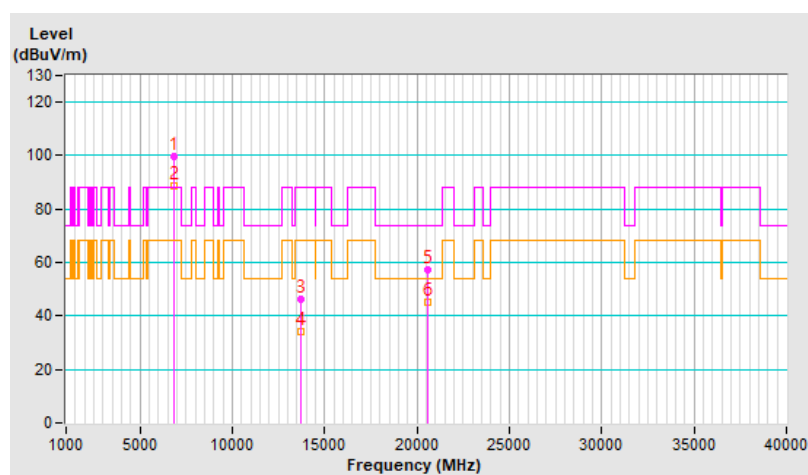


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	99.1 PK			2.24 H	203	90.2	8.9
2	*7025.00	89.6 AV			2.24 H	203	80.7	8.9
3	#7125.00	56.0 PK	88.2	-32.2	2.24 H	203	45.9	10.1
4	#7125.00	44.7 AV	68.2	-23.5	2.24 H	203	34.6	10.1
5	#14050.00	46.2 PK	88.2	-42.0	1.70 H	9	28.5	17.7
6	#14050.00	34.1 AV	68.2	-34.1	1.70 H	9	16.4	17.7
7	21075.00	57.2 PK	74.0	-16.8	1.71 H	34	60.2	-3.0
8	21075.00	44.9 AV	54.0	-9.1	1.71 H	34	47.9	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

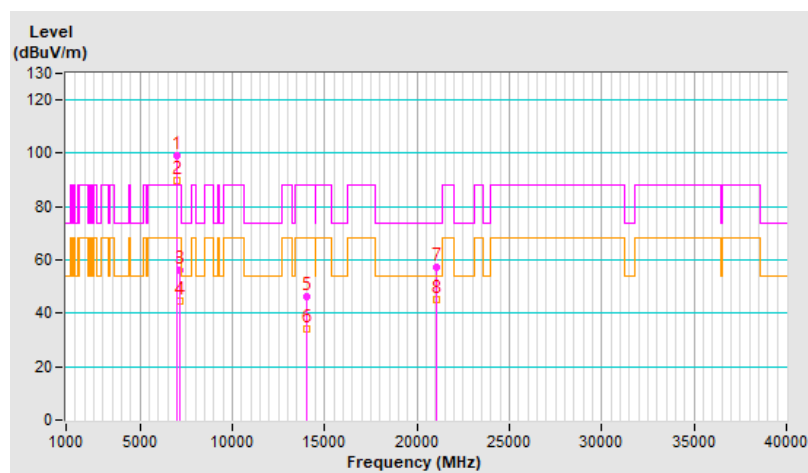


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	95.1 PK			1.48 V	148	86.2	8.9
2	*7025.00	85.1 AV			1.48 V	148	76.2	8.9
3	#7125.00	55.7 PK	88.2	-32.5	1.48 V	148	45.6	10.1
4	#7125.00	44.3 AV	68.2	-23.9	1.48 V	148	34.2	10.1
5	#14050.00	45.9 PK	88.2	-42.3	1.66 V	24	28.2	17.7
6	#14050.00	34.1 AV	68.2	-34.1	1.66 V	24	16.4	17.7
7	21075.00	56.5 PK	74.0	-17.5	1.78 V	41	59.5	-3.0
8	21075.00	44.1 AV	54.0	-9.9	1.78 V	41	47.1	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

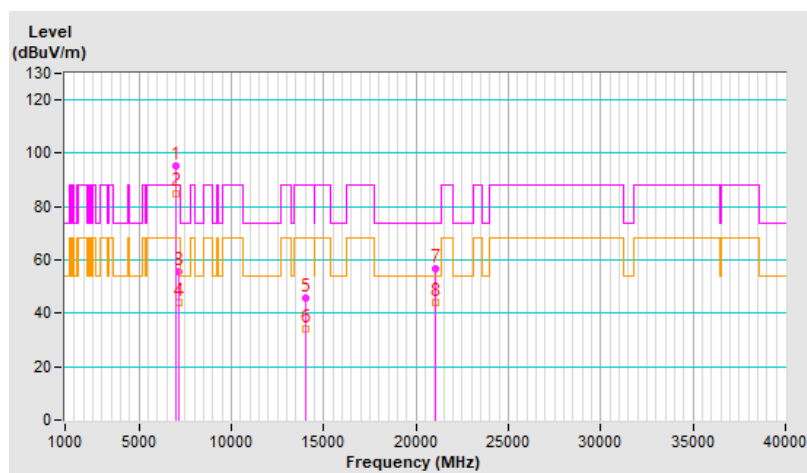


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.8 PK	88.2	-27.4	1.36 H	165	55.2	5.6
2	#5925.00	43.6 AV	68.2	-24.6	1.36 H	165	38.0	5.6
3	*6025.00	96.6 PK			1.36 H	165	91.0	5.6
4	*6025.00	85.6 AV			1.36 H	165	80.0	5.6
5	12050.00	46.3 PK	74.0	-27.7	1.70 H	21	31.7	14.6
6	12050.00	34.0 AV	54.0	-20.0	1.70 H	21	19.4	14.6
7	18075.00	56.6 PK	74.0	-17.4	1.71 H	41	61.9	-5.3
8	18075.00	44.3 AV	54.0	-9.7	1.71 H	41	49.6	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

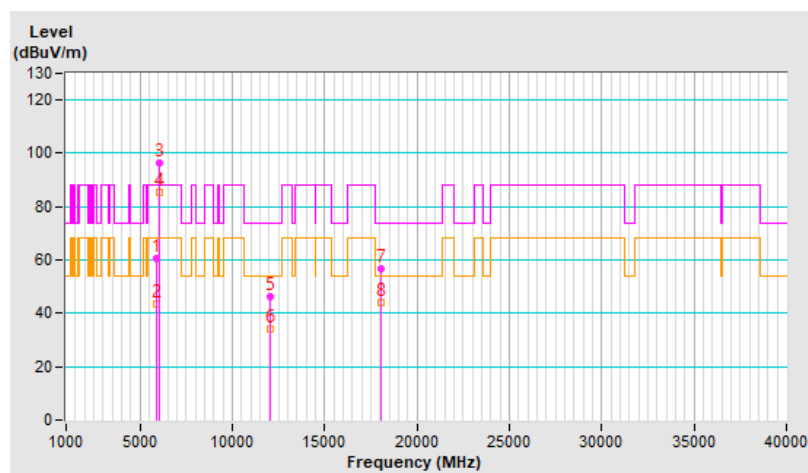


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.7 PK	88.2	-23.5	1.50 V	50	59.1	5.6
2	#5925.00	46.4 AV	68.2	-21.8	1.50 V	50	40.8	5.6
3	*6025.00	100.2 PK			1.50 V	50	94.6	5.6
4	*6025.00	88.5 AV			1.50 V	50	82.9	5.6
5	12050.00	46.0 PK	74.0	-28.0	1.58 V	20	31.4	14.6
6	12050.00	33.8 AV	54.0	-20.2	1.58 V	20	19.2	14.6
7	18075.00	56.5 PK	74.0	-17.5	1.75 V	39	61.8	-5.3
8	18075.00	44.5 AV	54.0	-9.5	1.75 V	39	49.8	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

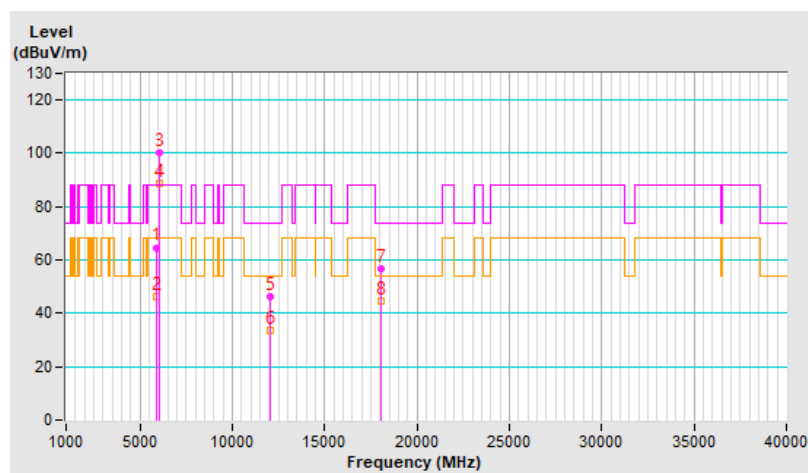


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	96.3 PK			1.40 H	177	90.5	5.8
2	*6185.00	85.4 AV			1.40 H	177	79.6	5.8
3	12370.00	46.8 PK	74.0	-27.2	1.68 H	15	32.1	14.7
4	12370.00	34.8 AV	54.0	-19.2	1.68 H	15	20.1	14.7
5	18555.00	56.3 PK	74.0	-17.7	1.78 H	47	61.7	-5.4
6	18555.00	43.9 AV	54.0	-10.1	1.78 H	47	49.3	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

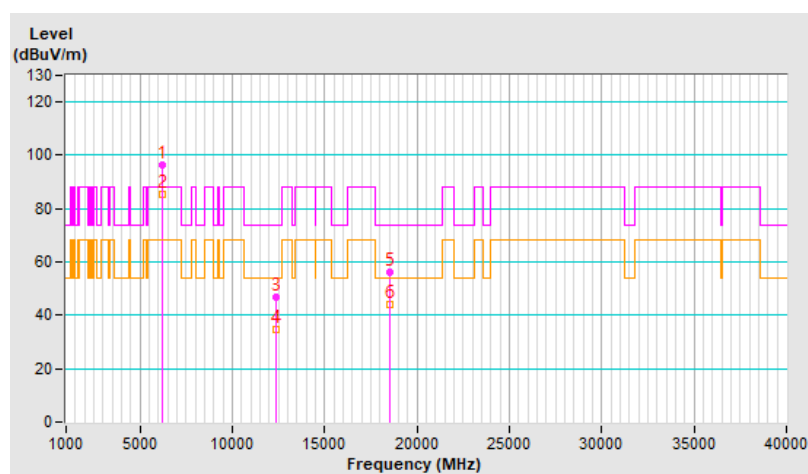


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	100.3 PK			1.54 V	54	94.5	5.8
2	*6185.00	88.9 AV			1.54 V	54	83.1	5.8
3	12370.00	46.5 PK	74.0	-27.5	1.64 V	23	31.8	14.7
4	12370.00	34.3 AV	54.0	-19.7	1.64 V	23	19.6	14.7
5	18555.00	56.7 PK	74.0	-17.3	1.80 V	42	62.1	-5.4
6	18555.00	44.8 AV	54.0	-9.2	1.80 V	42	50.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

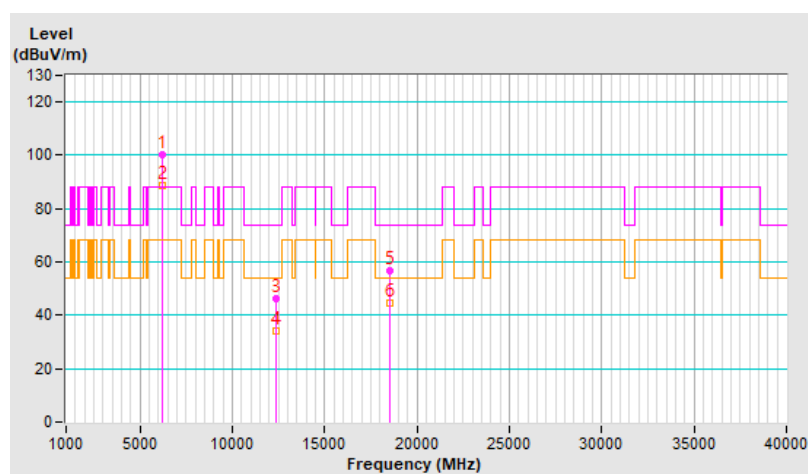


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	96.7 PK			1.31 H	169	90.3	6.4
2	*6345.00	85.9 AV			1.31 H	169	79.5	6.4
3	12690.00	46.3 PK	74.0	-27.7	1.66 H	11	31.4	14.9
4	12690.00	34.4 AV	54.0	-19.6	1.66 H	11	19.5	14.9
5	19035.00	56.4 PK	74.0	-17.6	1.66 H	46	61.3	-4.9
6	19035.00	44.4 AV	54.0	-9.6	1.66 H	46	49.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

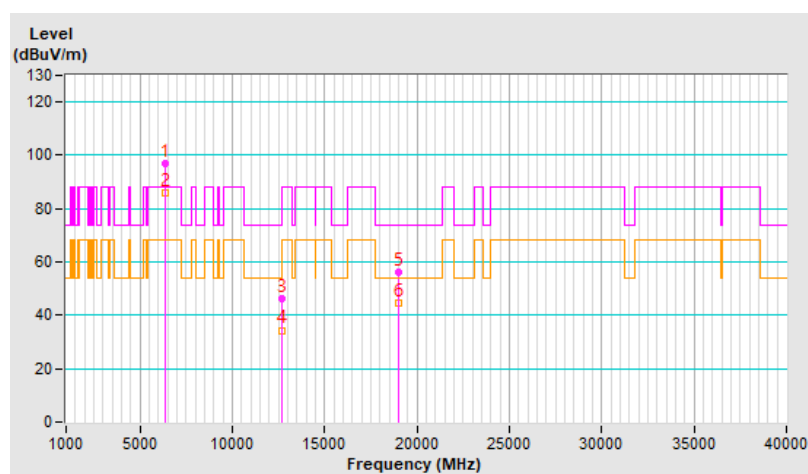


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	100.4 PK			1.52 V	62	94.0	6.4
2	*6345.00	88.5 AV			1.52 V	62	82.1	6.4
3	12690.00	45.8 PK	74.0	-28.2	1.56 V	22	30.9	14.9
4	12690.00	33.6 AV	54.0	-20.4	1.56 V	22	18.7	14.9
5	19035.00	56.6 PK	74.0	-17.4	1.79 V	26	61.5	-4.9
6	19035.00	44.1 AV	54.0	-9.9	1.79 V	26	49.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

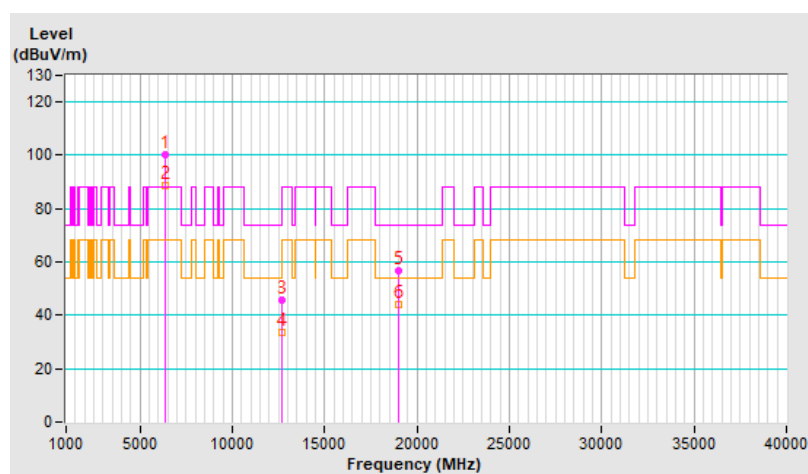


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	96.9 PK			1.32 H	149	89.7	7.2
2	*6505.00	85.7 AV			1.32 H	149	78.5	7.2
3	#13010.00	46.4 PK	88.2	-41.8	1.64 H	21	31.5	14.9
4	#13010.00	34.4 AV	68.2	-33.8	1.64 H	21	19.5	14.9
5	19515.00	56.6 PK	74.0	-17.4	1.74 H	47	61.3	-4.7
6	19515.00	44.5 AV	54.0	-9.5	1.74 H	47	49.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

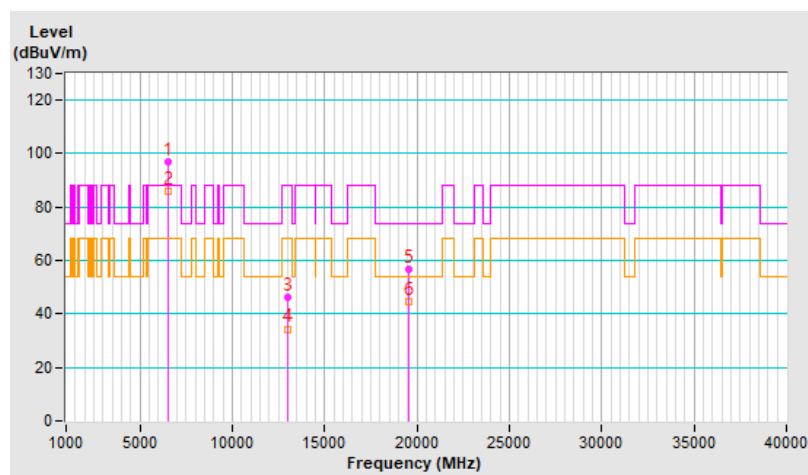


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.1 PK			1.52 V	40	92.9	7.2
2	*6505.00	88.5 AV			1.52 V	40	81.3	7.2
3	#13010.00	46.3 PK	88.2	-41.9	1.58 V	18	31.4	14.9
4	#13010.00	34.4 AV	68.2	-33.8	1.58 V	18	19.5	14.9
5	19515.00	56.5 PK	74.0	-17.5	1.74 V	33	61.2	-4.7
6	19515.00	44.2 AV	54.0	-9.8	1.74 V	33	48.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

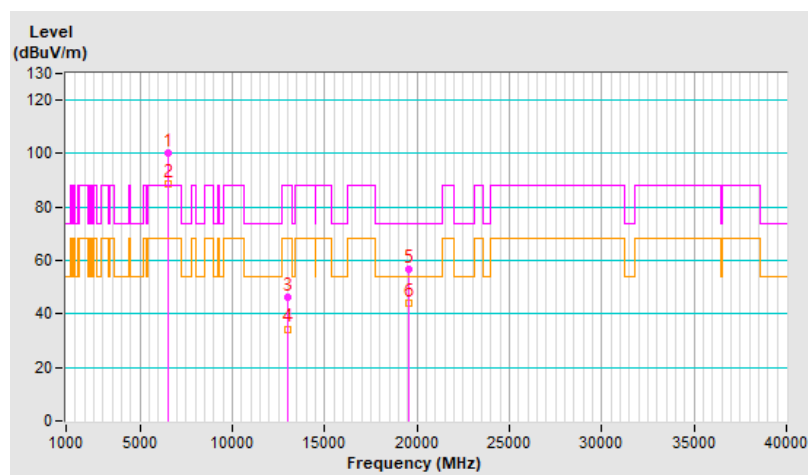


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	96.5 PK			1.42 H	178	88.5	8.0
2	*6825.00	85.6 AV			1.42 H	178	77.6	8.0
3	#13650.00	46.1 PK	88.2	-42.1	1.62 H	18	30.0	16.1
4	#13650.00	34.0 AV	68.2	-34.2	1.62 H	18	17.9	16.1
5	20475.00	56.6 PK	74.0	-17.4	1.72 H	18	60.2	-3.6
6	20475.00	44.2 AV	54.0	-9.8	1.72 H	18	47.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

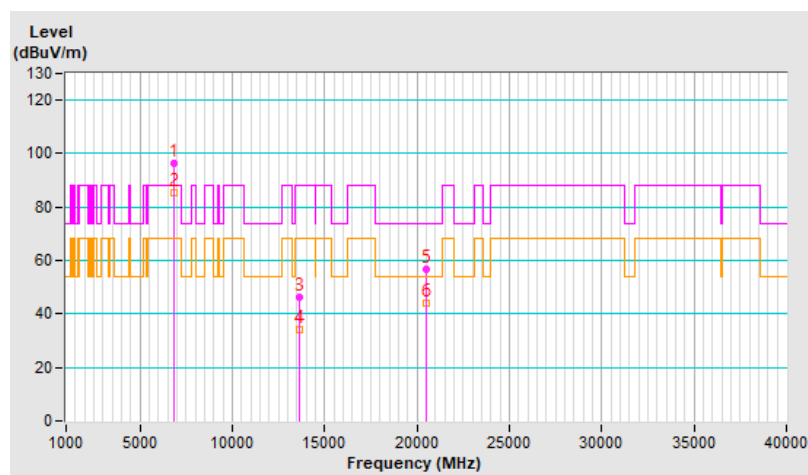


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	100.1 PK			1.54 V	51	92.1	8.0
2	*6825.00	88.2 AV			1.54 V	51	80.2	8.0
3	#13650.00	46.2 PK	88.2	-42.0	1.59 V	16	30.1	16.1
4	#13650.00	34.3 AV	68.2	-33.9	1.59 V	16	18.2	16.1
5	20475.00	56.5 PK	74.0	-17.5	1.79 V	55	60.1	-3.6
6	20475.00	44.6 AV	54.0	-9.4	1.79 V	55	48.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

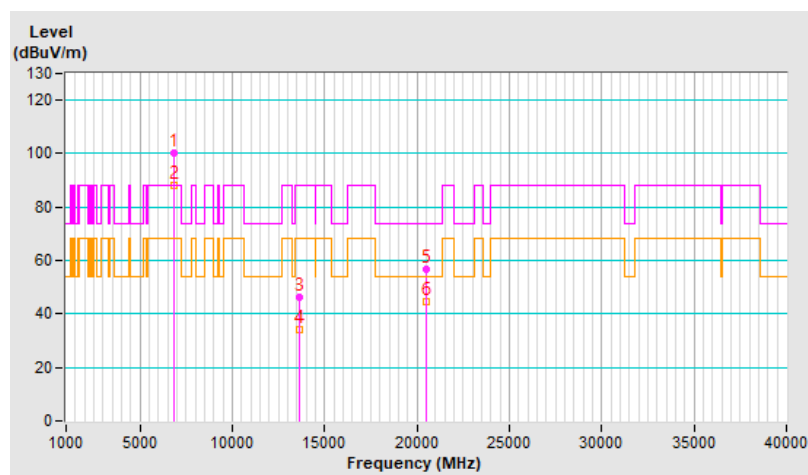


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	99.4 PK			2.23 H	203	90.5	8.9
2	*6985.00	87.7 AV			2.23 H	203	78.8	8.9
3	#7125.00	68.7 PK	88.2	-19.5	2.23 H	203	58.6	10.1
4	#7125.00	50.8 AV	68.2	-17.4	2.23 H	203	40.7	10.1
5	#13970.00	46.2 PK	88.2	-42.0	1.62 H	14	28.9	17.3
6	#13970.00	34.0 AV	68.2	-34.2	1.62 H	14	16.7	17.3
7	20955.00	56.8 PK	74.0	-17.2	1.69 H	36	60.2	-3.4
8	20955.00	44.3 AV	54.0	-9.7	1.69 H	36	47.7	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

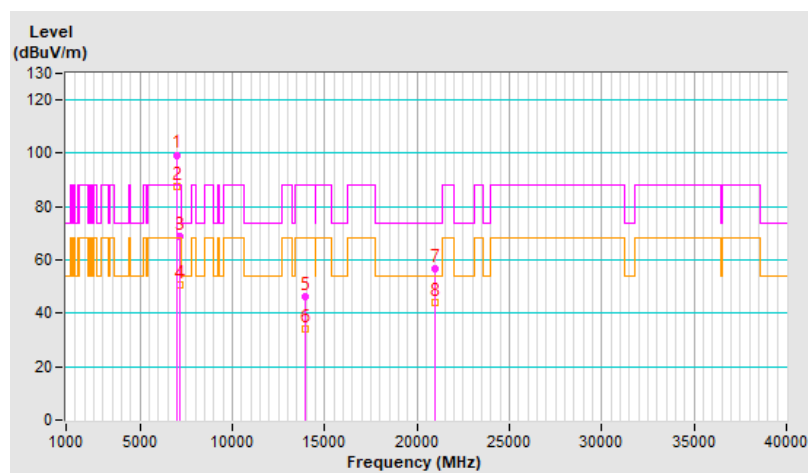


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	97.7 PK			1.63 V	333	88.8	8.9
2	*6985.00	85.3 AV			1.63 V	333	76.4	8.9
3	#7125.00	62.4 PK	88.2	-25.8	1.63 V	333	52.3	10.1
4	#7125.00	48.8 AV	68.2	-19.4	1.63 V	333	38.7	10.1
5	#13970.00	46.4 PK	88.2	-41.8	1.56 V	17	29.1	17.3
6	#13970.00	34.2 AV	68.2	-34.0	1.56 V	17	16.9	17.3
7	20955.00	56.4 PK	74.0	-17.6	1.73 V	42	59.8	-3.4
8	20955.00	44.4 AV	54.0	-9.6	1.73 V	42	47.8	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

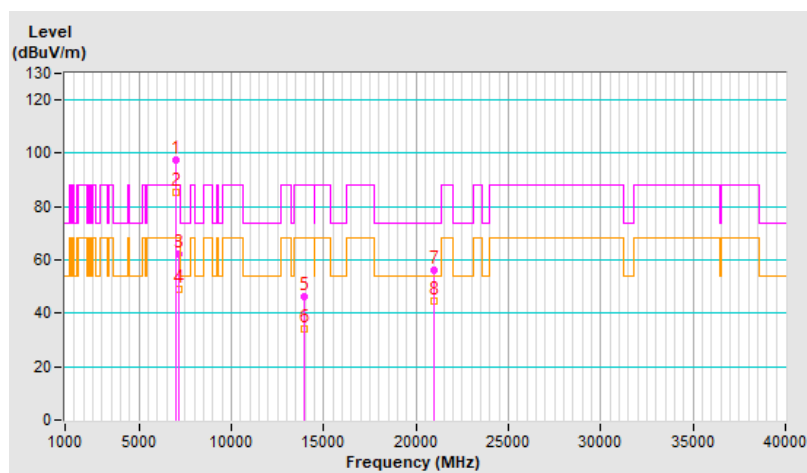


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.3 PK	88.2	-30.9	1.17 H	168	51.7	5.6
2	#5925.00	42.6 AV	68.2	-25.6	1.17 H	168	37.0	5.6
3	*6025.00	95.5 PK			1.17 H	168	89.9	5.6
4	*6025.00	84.0 AV			1.17 H	168	78.4	5.6
5	12050.00	46.5 PK	74.0	-27.5	1.69 H	10	31.9	14.6
6	12050.00	34.1 AV	54.0	-19.9	1.69 H	10	19.5	14.6
7	18075.00	57.4 PK	74.0	-16.6	1.75 H	30	62.7	-5.3
8	18075.00	44.9 AV	54.0	-9.1	1.75 H	30	50.2	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

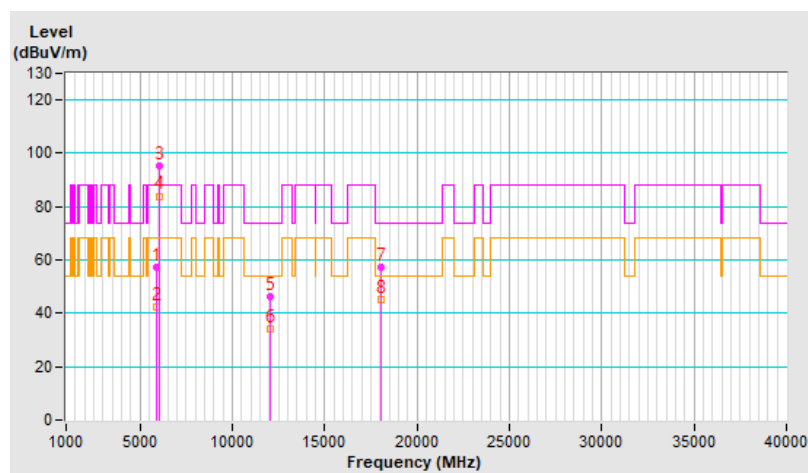


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.8 PK	88.2	-27.4	1.34 V	51	55.2	5.6
2	#5925.00	45.3 AV	68.2	-22.9	1.34 V	51	39.7	5.6
3	*6025.00	99.8 PK			1.34 V	51	94.2	5.6
4	*6025.00	88.5 AV			1.34 V	51	82.9	5.6
5	12050.00	45.4 PK	74.0	-28.6	1.63 V	20	30.8	14.6
6	12050.00	33.6 AV	54.0	-20.4	1.63 V	20	19.0	14.6
7	18075.00	56.0 PK	74.0	-18.0	1.74 V	52	61.3	-5.3
8	18075.00	44.0 AV	54.0	-10.0	1.74 V	52	49.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

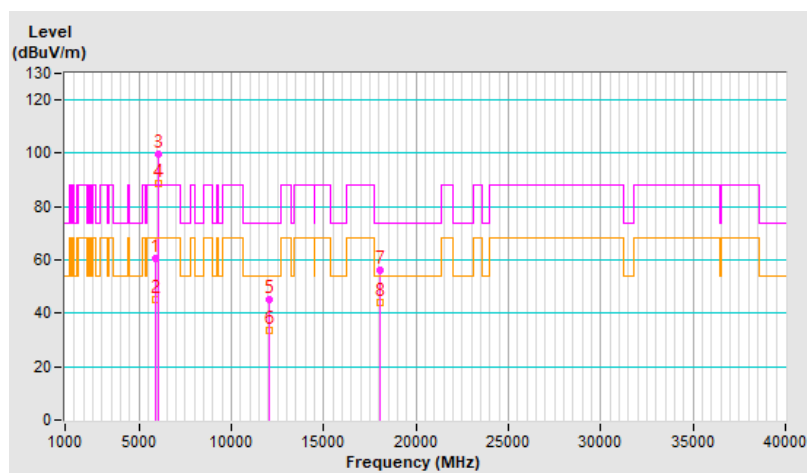


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	99.5 PK			2.19 H	210	93.7	5.8
2	*6185.00	87.3 AV			2.19 H	210	81.5	5.8
3	12370.00	46.9 PK	74.0	-27.1	1.67 H	20	32.2	14.7
4	12370.00	34.8 AV	54.0	-19.2	1.67 H	20	20.1	14.7
5	18555.00	56.8 PK	74.0	-17.2	1.70 H	47	62.2	-5.4
6	18555.00	44.2 AV	54.0	-9.8	1.70 H	47	49.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

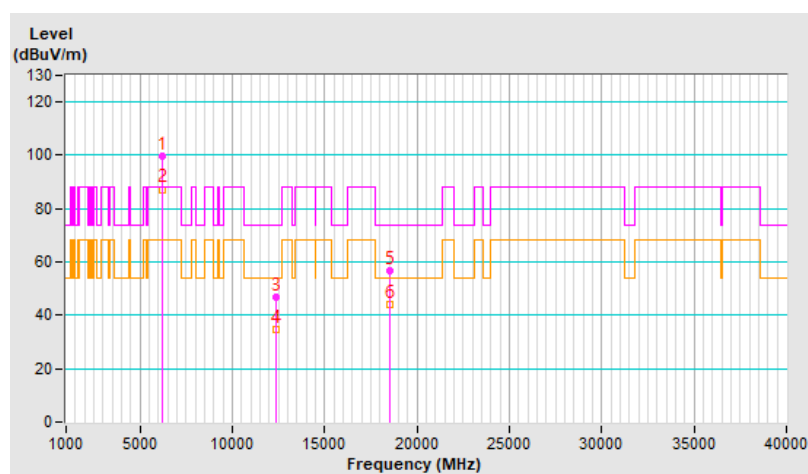


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	99.2 PK			1.31 V	48	93.4	5.8
2	*6185.00	88.2 AV			1.31 V	48	82.4	5.8
3	12370.00	45.6 PK	74.0	-28.4	1.57 V	21	30.9	14.7
4	12370.00	33.5 AV	54.0	-20.5	1.57 V	21	18.8	14.7
5	18555.00	57.0 PK	74.0	-17.0	1.81 V	30	62.4	-5.4
6	18555.00	44.8 AV	54.0	-9.2	1.81 V	30	50.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

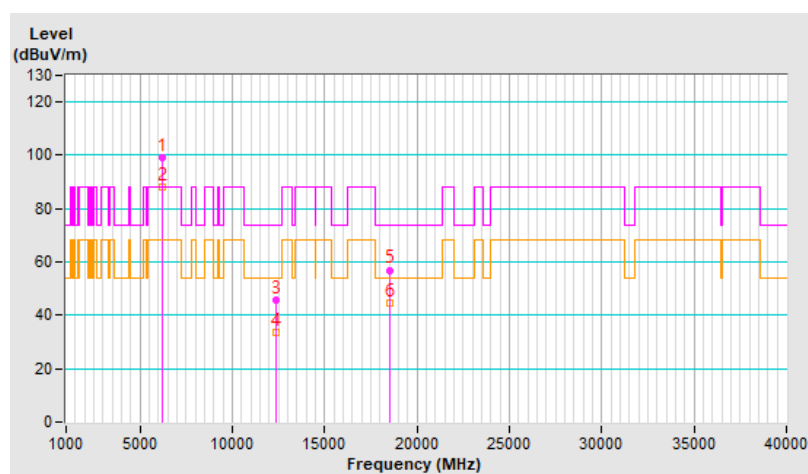


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	100.0 PK			2.18 H	197	93.6	6.4
2	*6345.00	87.9 AV			2.18 H	197	81.5	6.4
3	12690.00	46.1 PK	74.0	-27.9	1.72 H	11	31.2	14.9
4	12690.00	34.1 AV	54.0	-19.9	1.72 H	11	19.2	14.9
5	19035.00	56.5 PK	74.0	-17.5	1.76 H	24	61.4	-4.9
6	19035.00	43.9 AV	54.0	-10.1	1.76 H	24	48.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

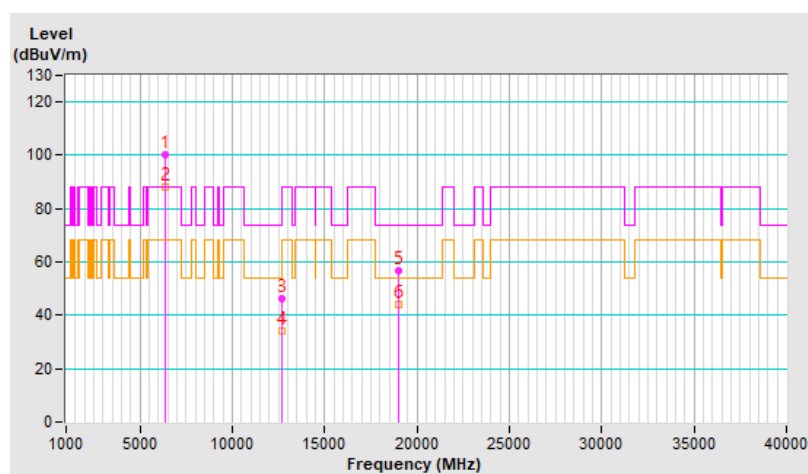


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	99.8 PK			1.31 V	60	93.4	6.4
2	*6345.00	88.5 AV			1.31 V	60	82.1	6.4
3	12690.00	46.4 PK	74.0	-27.6	1.63 V	21	31.5	14.9
4	12690.00	34.5 AV	54.0	-19.5	1.63 V	21	19.6	14.9
5	19035.00	56.7 PK	74.0	-17.3	1.78 V	50	61.6	-4.9
6	19035.00	44.6 AV	54.0	-9.4	1.78 V	50	49.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

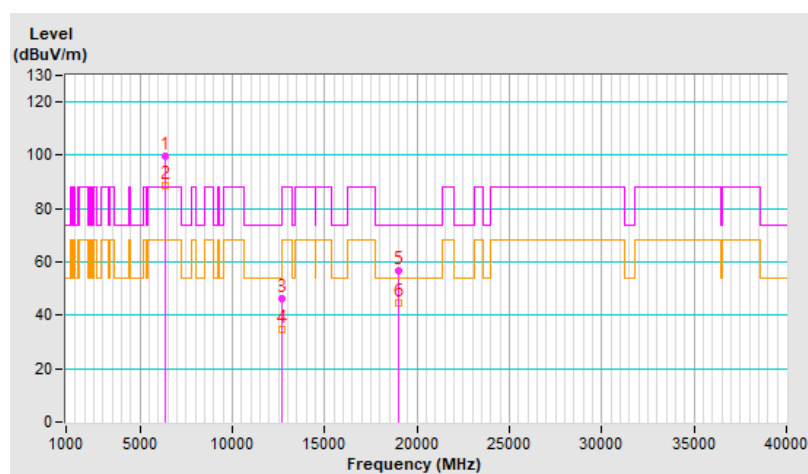


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	99.8 PK			2.25 H	192	92.6	7.2
2	*6505.00	87.8 AV			2.25 H	192	80.6	7.2
3	#13010.00	46.6 PK	88.2	-41.6	1.73 H	19	31.7	14.9
4	#13010.00	34.2 AV	68.2	-34.0	1.73 H	19	19.3	14.9
5	19515.00	56.7 PK	74.0	-17.3	1.73 H	37	61.4	-4.7
6	19515.00	44.5 AV	54.0	-9.5	1.73 H	37	49.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

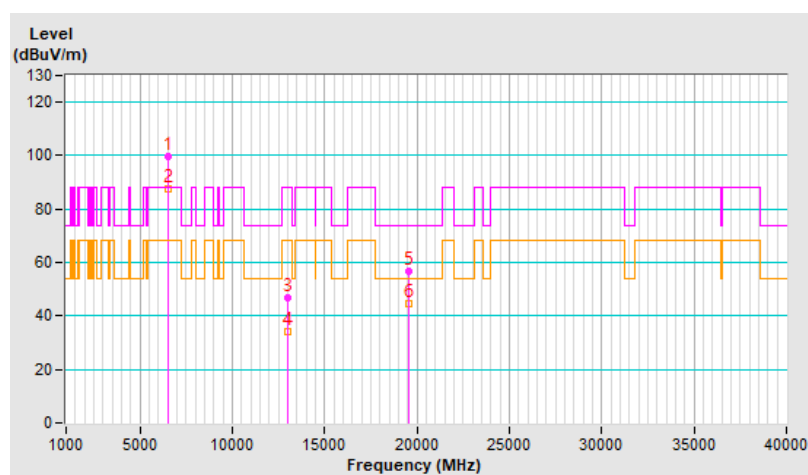


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.1 PK			1.30 V	48	92.9	7.2
2	*6505.00	88.6 AV			1.30 V	48	81.4	7.2
3	#13010.00	45.9 PK	88.2	-42.3	1.64 V	10	31.0	14.9
4	#13010.00	34.1 AV	68.2	-34.1	1.64 V	10	19.2	14.9
5	19515.00	56.1 PK	74.0	-17.9	1.76 V	51	60.8	-4.7
6	19515.00	44.1 AV	54.0	-9.9	1.76 V	51	48.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

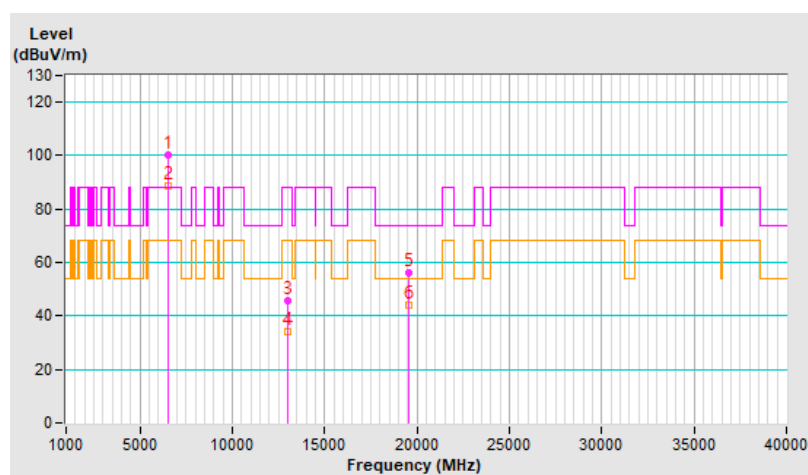


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	99.9 PK			2.21 H	192	91.9	8.0
2	*6825.00	87.8 AV			2.21 H	192	79.8	8.0
3	#13650.00	47.1 PK	88.2	-41.1	1.66 H	11	31.0	16.1
4	#13650.00	34.9 AV	68.2	-33.3	1.66 H	11	18.8	16.1
5	20475.00	56.4 PK	74.0	-17.6	1.71 H	27	60.0	-3.6
6	20475.00	43.9 AV	54.0	-10.1	1.71 H	27	47.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

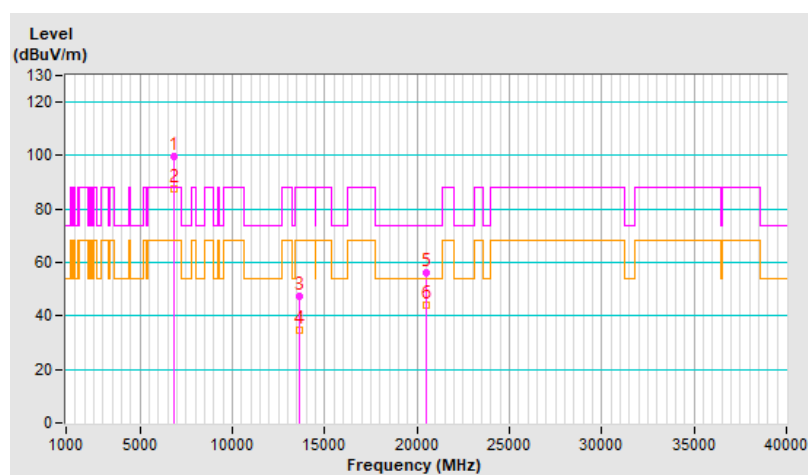


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	99.3 PK			1.36 V	58	91.3	8.0
2	*6825.00	88.2 AV			1.36 V	58	80.2	8.0
3	#13650.00	46.1 PK	88.2	-42.1	1.65 V	11	30.0	16.1
4	#13650.00	34.2 AV	68.2	-34.0	1.65 V	11	18.1	16.1
5	20475.00	56.7 PK	74.0	-17.3	1.75 V	54	60.3	-3.6
6	20475.00	44.2 AV	54.0	-9.8	1.75 V	54	47.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

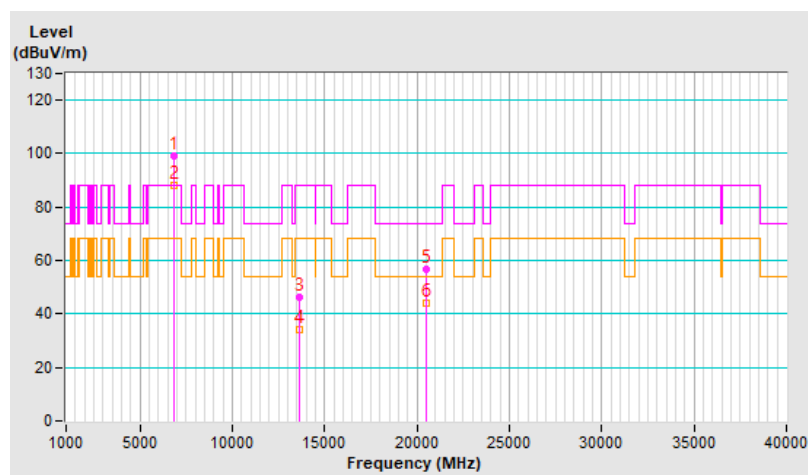


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	99.7 PK			2.22 H	199	90.8	8.9
2	*6985.00	87.6 AV			2.22 H	199	78.7	8.9
3	#7125.00	68.7 PK	88.2	-19.5	2.22 H	199	58.6	10.1
4	#7125.00	51.4 AV	68.2	-16.8	2.22 H	199	41.3	10.1
5	#13970.00	46.7 PK	88.2	-41.5	1.73 H	16	29.4	17.3
6	#13970.00	34.4 AV	68.2	-33.8	1.73 H	16	17.1	17.3
7	20955.00	56.1 PK	74.0	-17.9	1.68 H	45	59.5	-3.4
8	20955.00	44.0 AV	54.0	-10.0	1.68 H	45	47.4	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

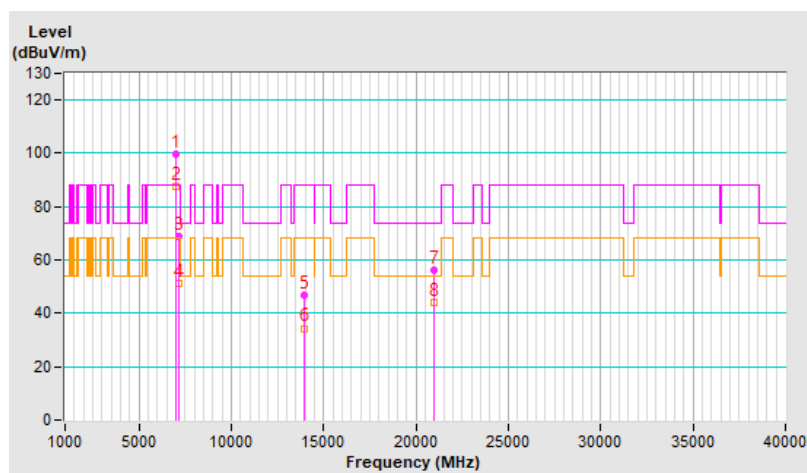


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	96.1 PK			1.51 V	334	87.2	8.9
2	*6985.00	84.6 AV			1.51 V	334	75.7	8.9
3	#7125.00	64.8 PK	88.2	-23.4	1.51 V	334	54.7	10.1
4	#7125.00	48.2 AV	68.2	-20.0	1.51 V	334	38.1	10.1
5	#13970.00	46.0 PK	88.2	-42.2	1.56 V	23	28.7	17.3
6	#13970.00	34.0 AV	68.2	-34.2	1.56 V	23	16.7	17.3
7	20955.00	56.6 PK	74.0	-17.4	1.82 V	44	60.0	-3.4
8	20955.00	44.1 AV	54.0	-9.9	1.82 V	44	47.5	-3.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

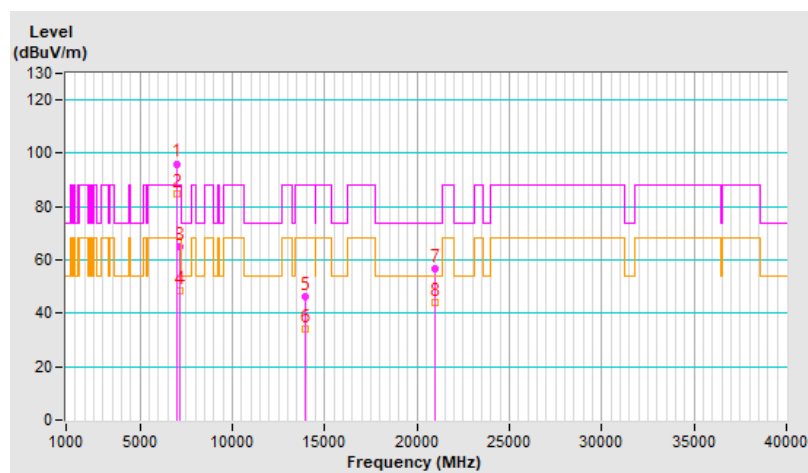


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

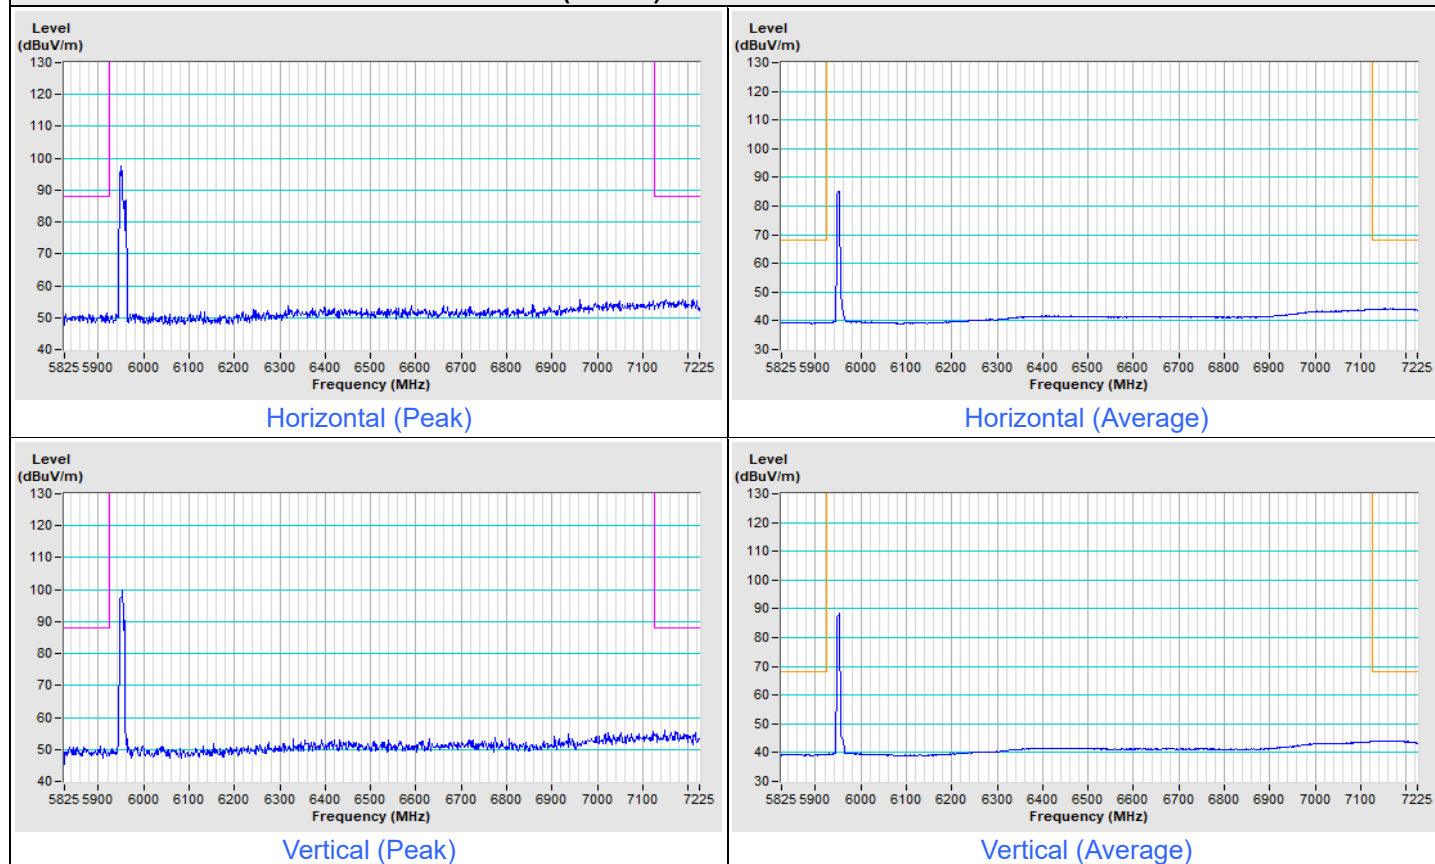


802.11be (EHT20) 52+26-tone MRU Channel 233

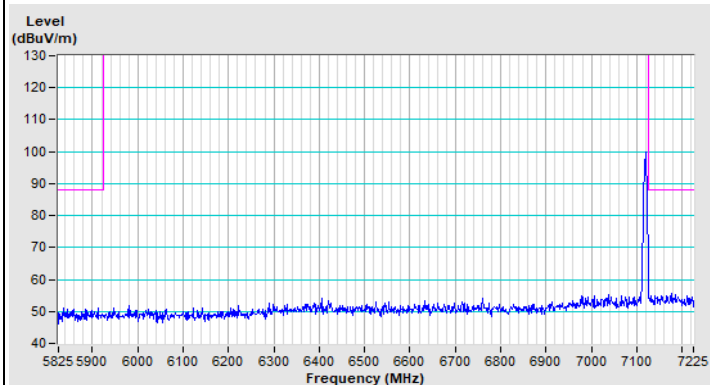


Horizontal (Peak)

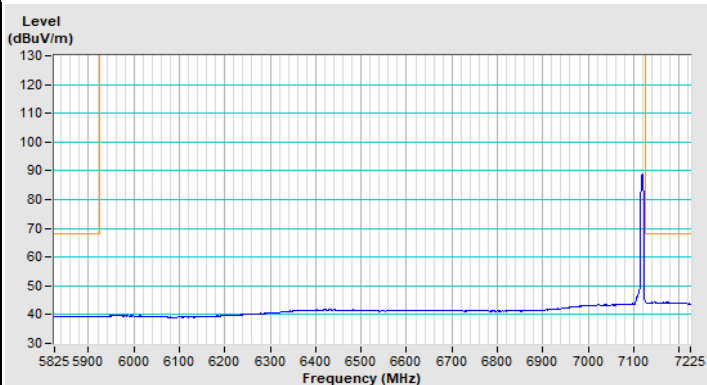

Horizontal (Average)

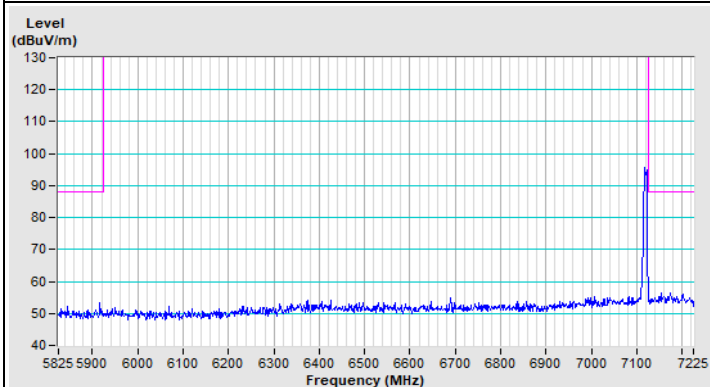


Vertical (Peak)

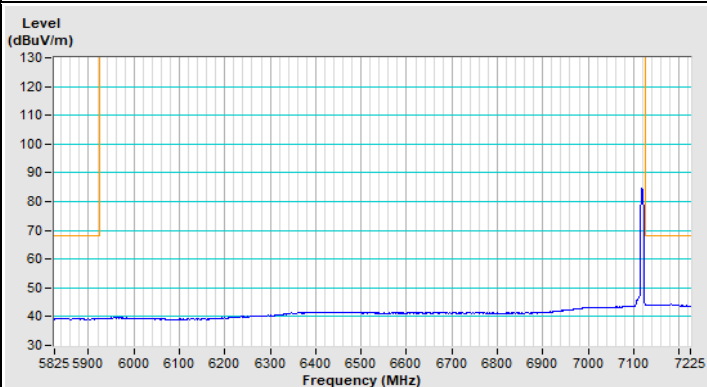


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

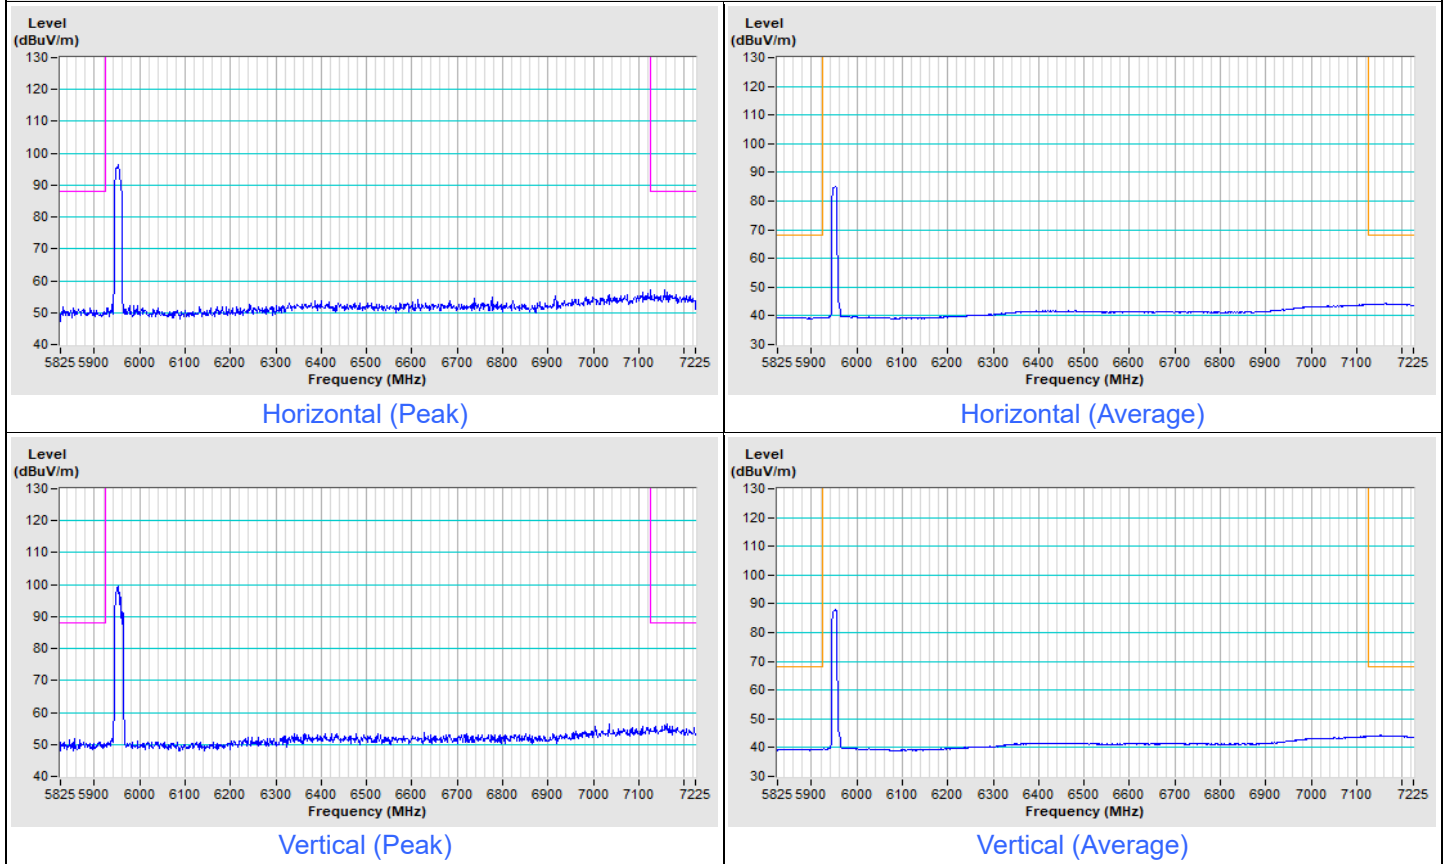


802.11be (EHT20) 106+26-tone MRU Channel 233

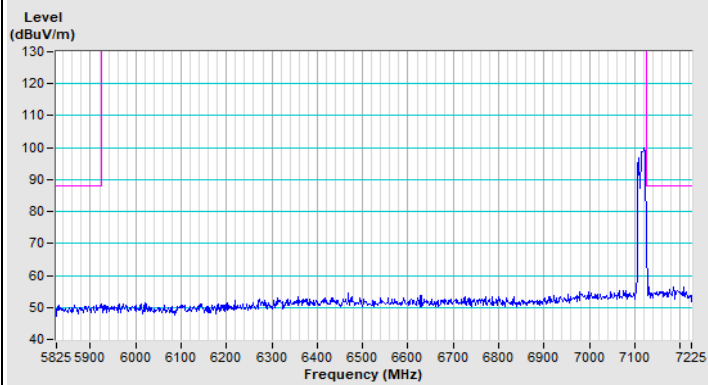


Horizontal (Peak)

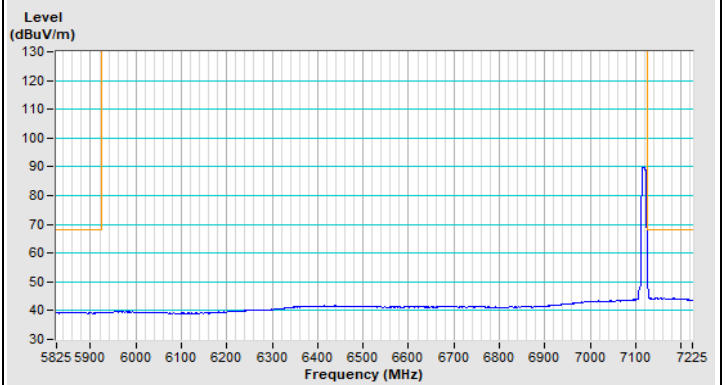

Horizontal (Average)

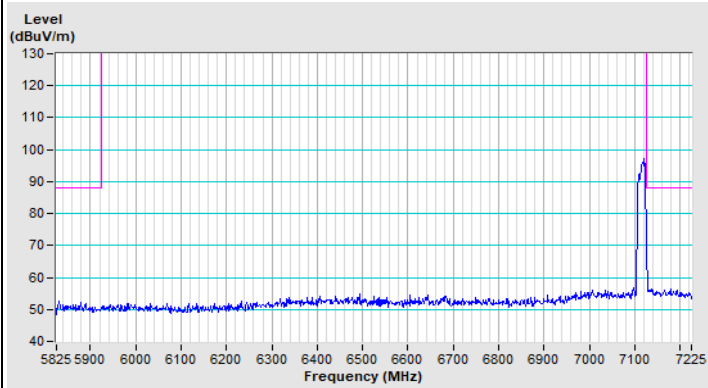


Vertical (Peak)

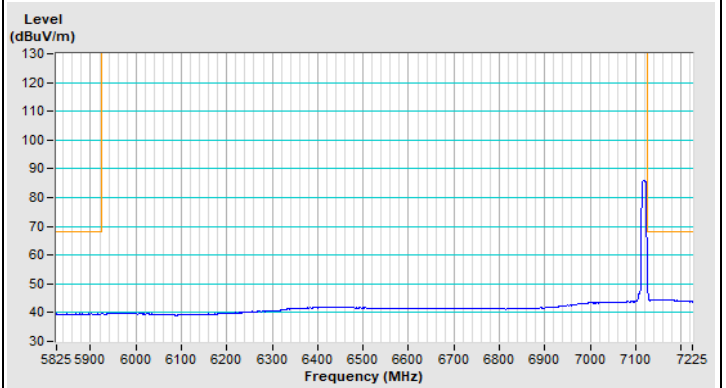


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

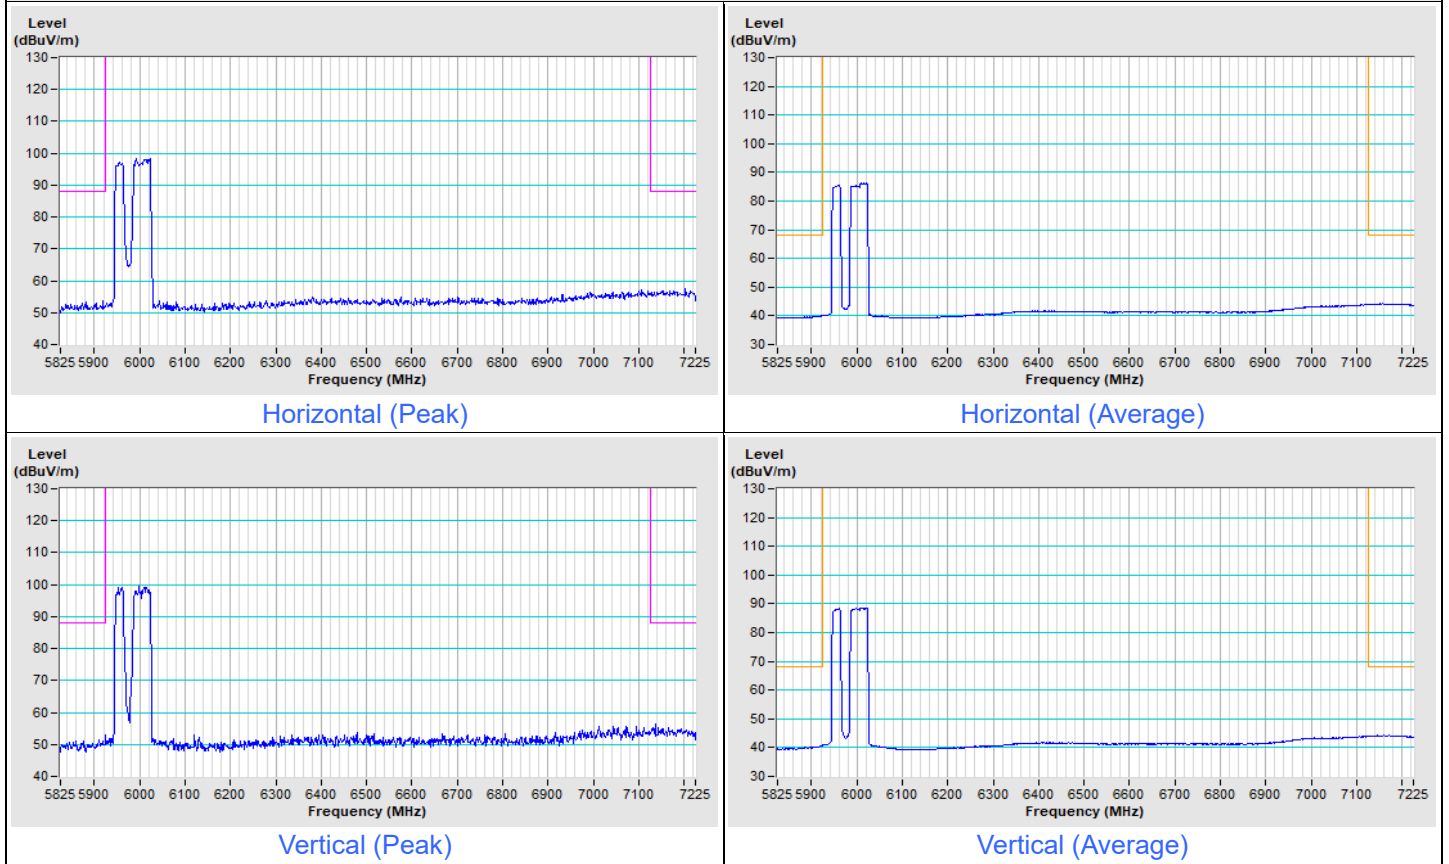


802.11be (EHT80) 484+242-tone MRU Channel 215

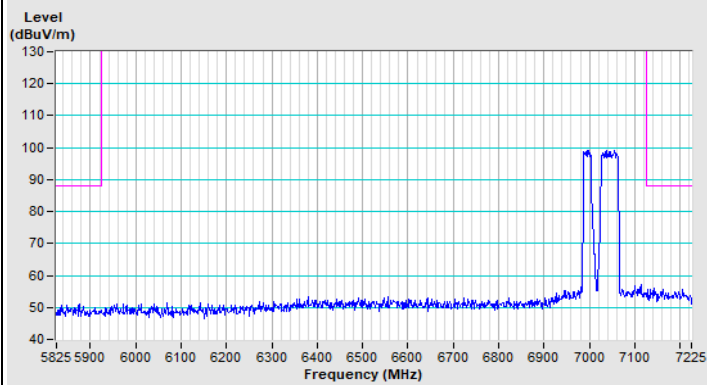


Horizontal (Peak)

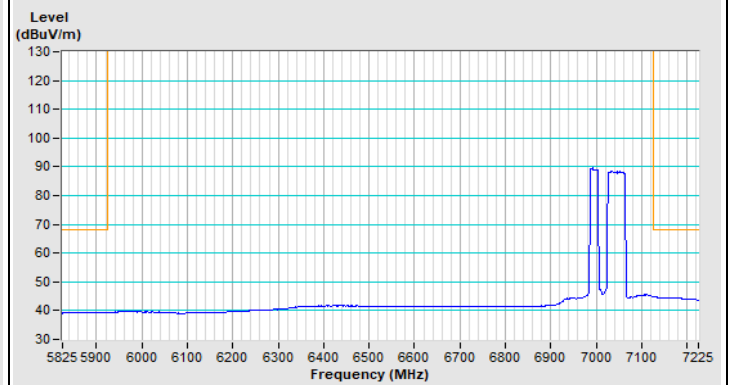

Horizontal (Average)

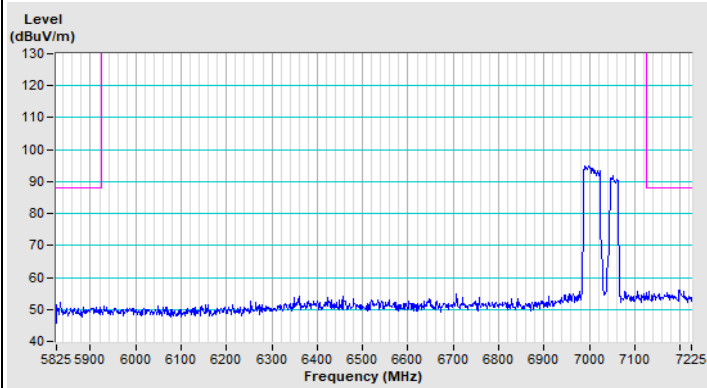


Vertical (Peak)

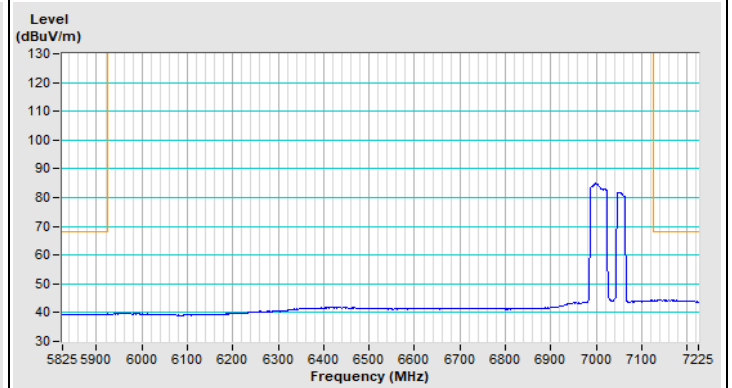


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

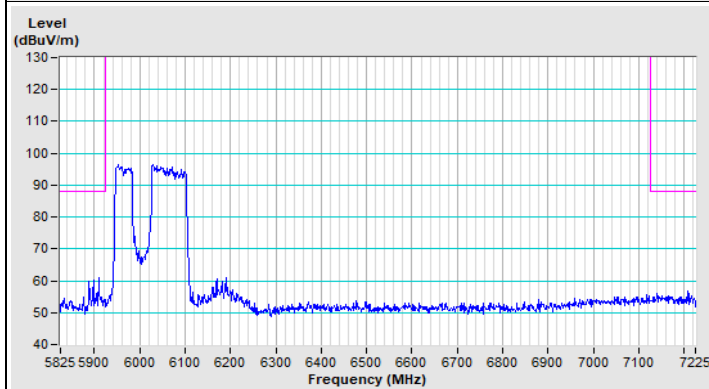


Horizontal (Peak)

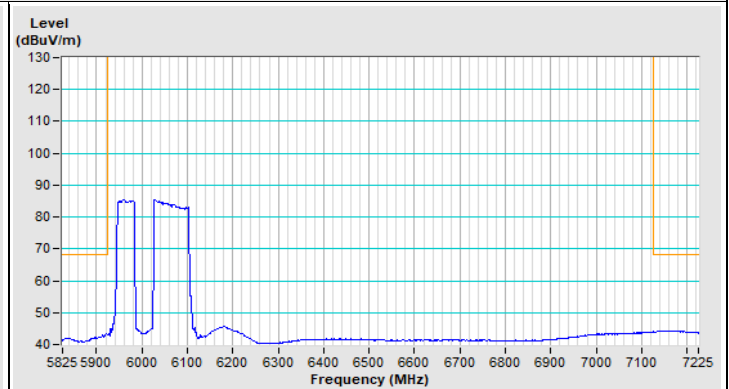

Horizontal (Average)

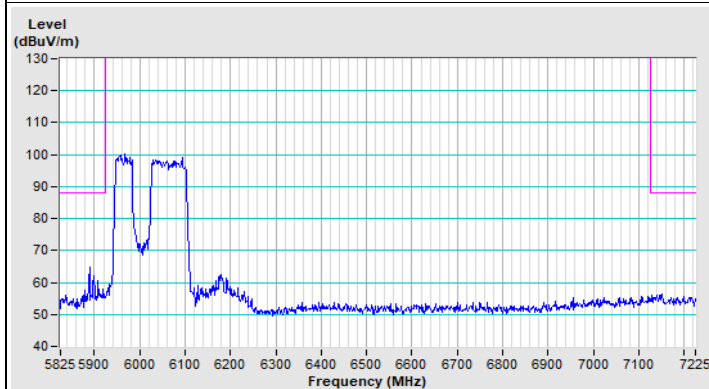


Vertical (Peak)

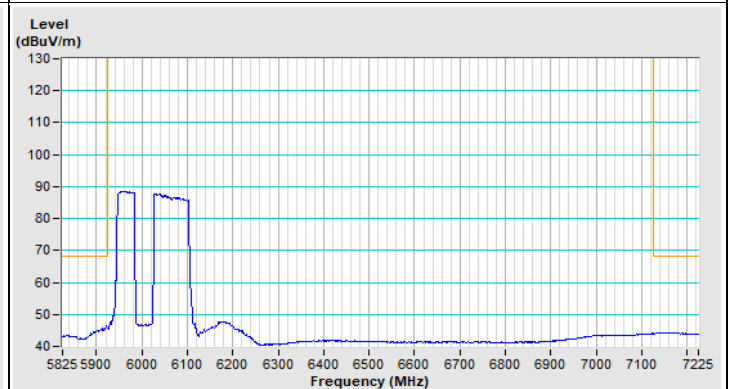


Vertical (Average)


802.11be (EHT160) 996+484-tone MRU Channel 207

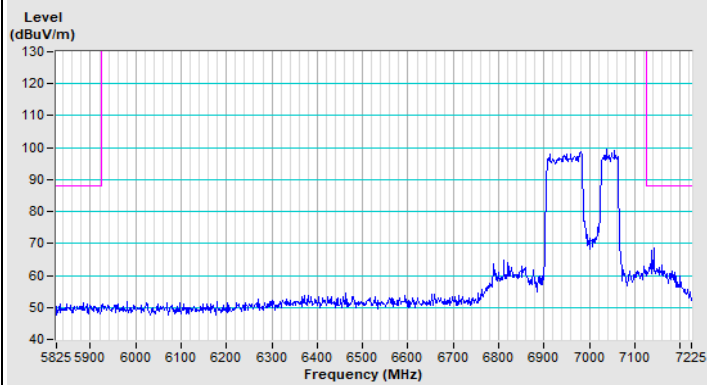


Horizontal (Peak)

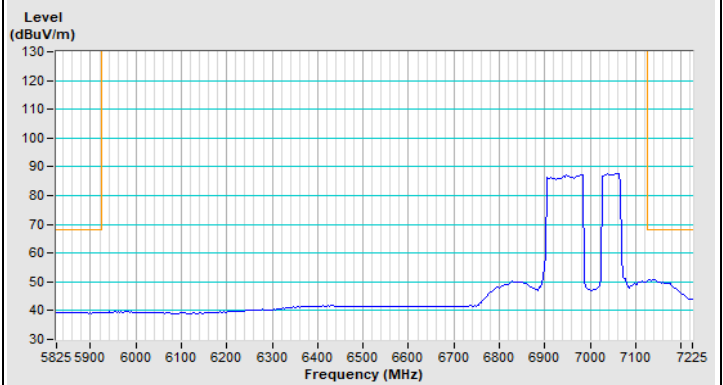

Horizontal (Average)

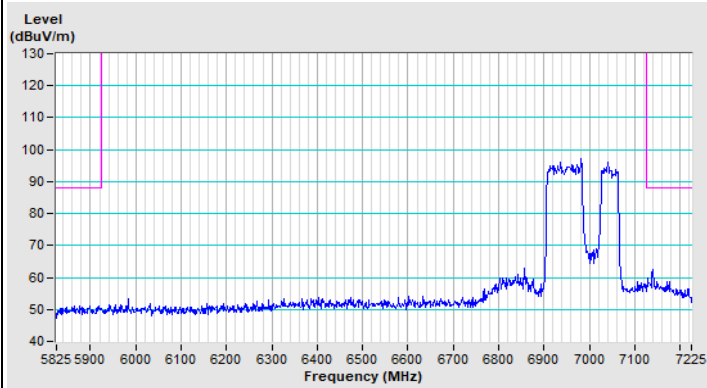


Vertical (Peak)

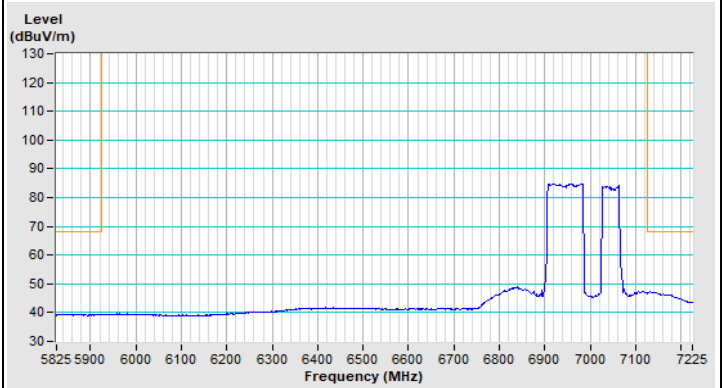


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

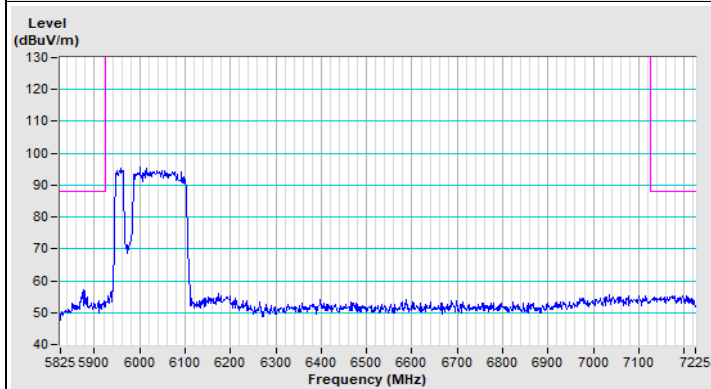


Horizontal (Peak)

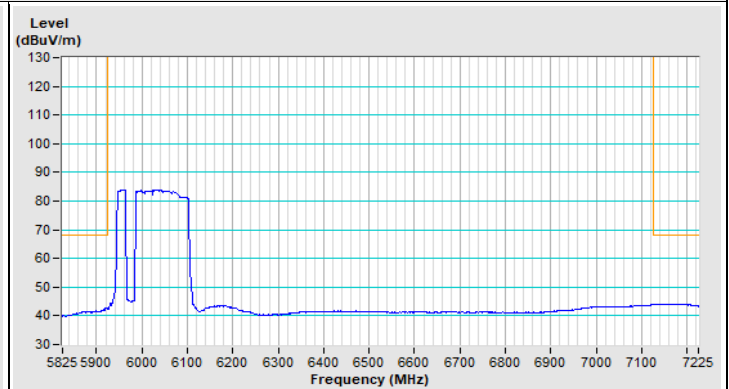

Horizontal (Average)

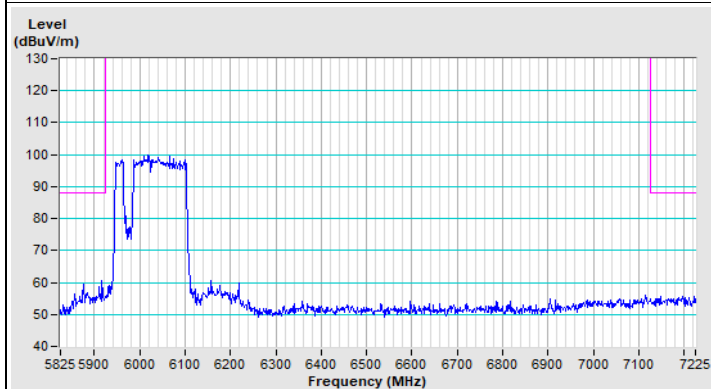


Vertical (Peak)

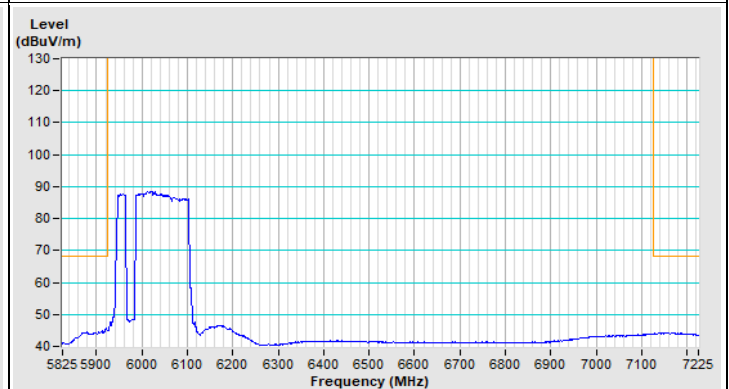


Vertical (Average)


802.11be (EHT160) 996+484+242-tone MRU Channel 207

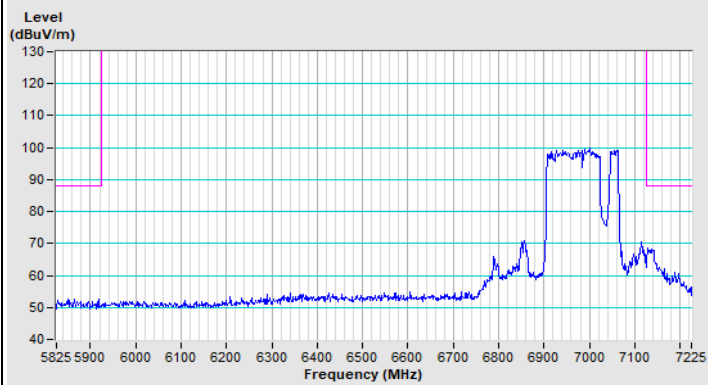


Horizontal (Peak)

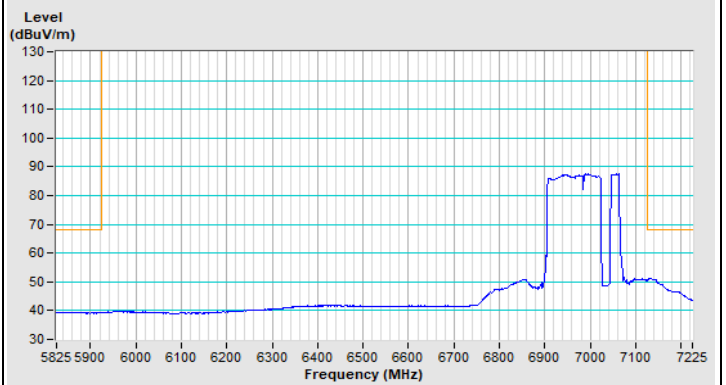

Horizontal (Average)

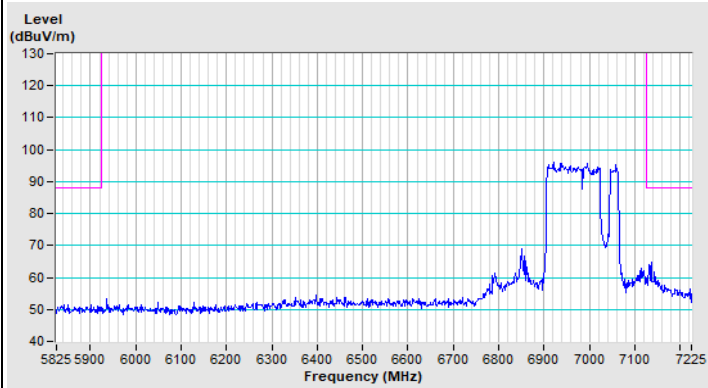

Vertical (Peak)

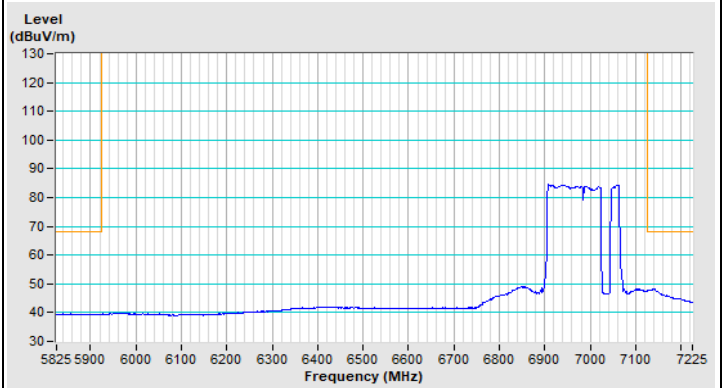

Vertical (Average)


Mode C_1TX

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.5 PK	88.2	-35.7	2.47 H	233	46.9	5.6
2	#5925.00	39.4 AV	68.2	-28.8	2.47 H	233	33.8	5.6
3	*5955.00	89.0 PK			2.47 H	233	83.5	5.5
4	*5955.00	77.0 AV			2.47 H	233	71.5	5.5
5	11910.00	46.2 PK	74.0	-27.8	1.69 H	283	31.6	14.6
6	11910.00	35.9 AV	54.0	-18.1	1.69 H	283	21.3	14.6
7	17865.00	50.0 PK	74.0	-24.0	2.64 H	180	24.1	25.9
8	17865.00	38.7 AV	54.0	-15.3	2.64 H	180	12.8	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

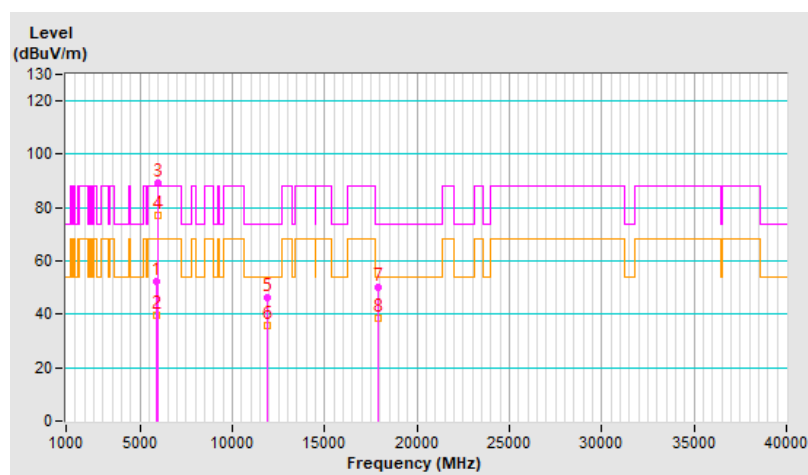


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.86 V	259	45.8	5.6
2	#5925.00	39.3 AV	68.2	-28.9	1.86 V	259	33.7	5.6
3	*5955.00	100.1 PK			1.86 V	259	94.6	5.5
4	*5955.00	90.0 AV			1.86 V	259	84.5	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.74 V	272	32.1	14.6
6	11910.00	36.2 AV	54.0	-17.8	1.74 V	272	21.6	14.6
7	17865.00	49.7 PK	74.0	-24.3	2.66 V	170	23.8	25.9
8	17865.00	38.5 AV	54.0	-15.5	2.66 V	170	12.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

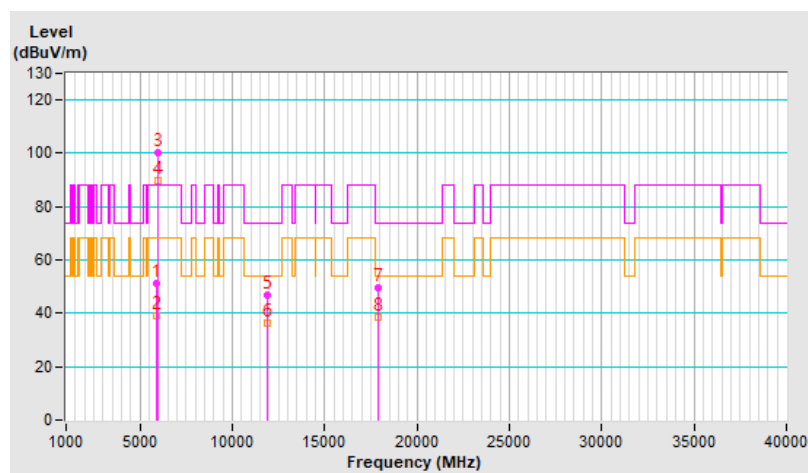


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	91.0 PK			1.57 H	138	84.2	6.8
2	*6415.00	77.8 AV			1.57 H	138	71.0	6.8
3	#12830.00	46.2 PK	88.2	-42.0	1.69 H	276	31.1	15.1
4	#12830.00	35.9 AV	68.2	-32.3	1.69 H	276	20.8	15.1
5	19245.00	49.6 PK	74.0	-24.4	2.65 H	166	54.2	-4.6
6	19245.00	38.2 AV	54.0	-15.8	2.65 H	166	42.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

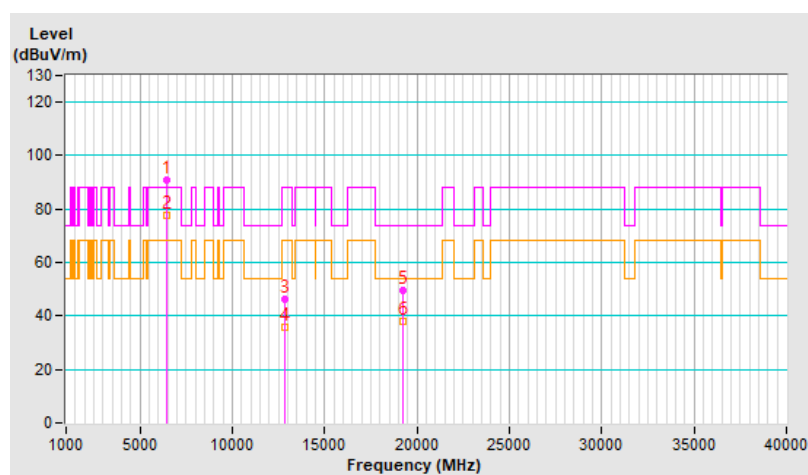


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	102.9 PK			1.34 V	81	96.1	6.8
2	*6415.00	90.6 AV			1.34 V	81	83.8	6.8
3	#12830.00	46.5 PK	88.2	-41.7	1.78 V	278	31.4	15.1
4	#12830.00	36.0 AV	68.2	-32.2	1.78 V	278	20.9	15.1
5	19245.00	49.1 PK	74.0	-24.9	2.70 V	163	53.7	-4.6
6	19245.00	38.1 AV	54.0	-15.9	2.70 V	163	42.7	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

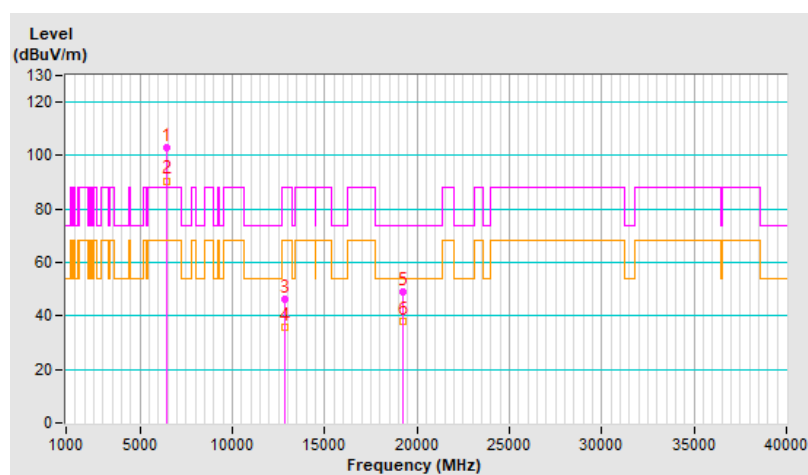


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	90.4 PK			1.52 H	131	83.5	6.9
2	*6435.00	77.3 AV			1.52 H	131	70.4	6.9
3	#12870.00	47.1 PK	88.2	-41.1	1.70 H	283	31.9	15.2
4	#12870.00	36.6 AV	68.2	-31.6	1.70 H	283	21.4	15.2
5	19305.00	49.7 PK	74.0	-24.3	2.61 H	168	54.2	-4.5
6	19305.00	38.6 AV	54.0	-15.4	2.61 H	168	43.1	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

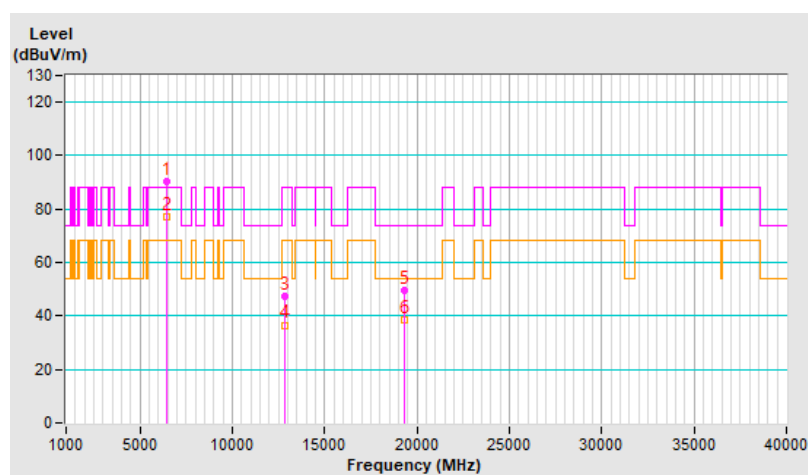


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.5 PK			1.73 V	84	93.6	6.9
2	*6435.00	92.4 AV			1.73 V	84	85.5	6.9
3	#12870.00	47.1 PK	88.2	-41.1	1.75 V	268	31.9	15.2
4	#12870.00	36.6 AV	68.2	-31.6	1.75 V	268	21.4	15.2
5	19305.00	49.4 PK	74.0	-24.6	2.65 V	157	53.9	-4.5
6	19305.00	38.2 AV	54.0	-15.8	2.65 V	157	42.7	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

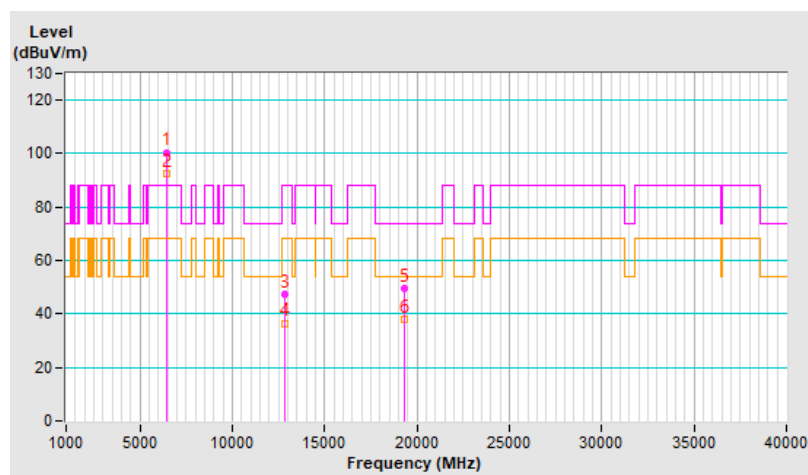


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	91.1 PK			1.62 H	125	83.9	7.2
2	*6515.00	77.9 AV			1.62 H	125	70.7	7.2
3	#13030.00	46.8 PK	88.2	-41.4	1.75 H	265	31.8	15.0
4	#13030.00	36.5 AV	68.2	-31.7	1.75 H	265	21.5	15.0
5	19545.00	49.3 PK	74.0	-24.7	2.62 H	179	54.1	-4.8
6	19545.00	38.4 AV	54.0	-15.6	2.62 H	179	43.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

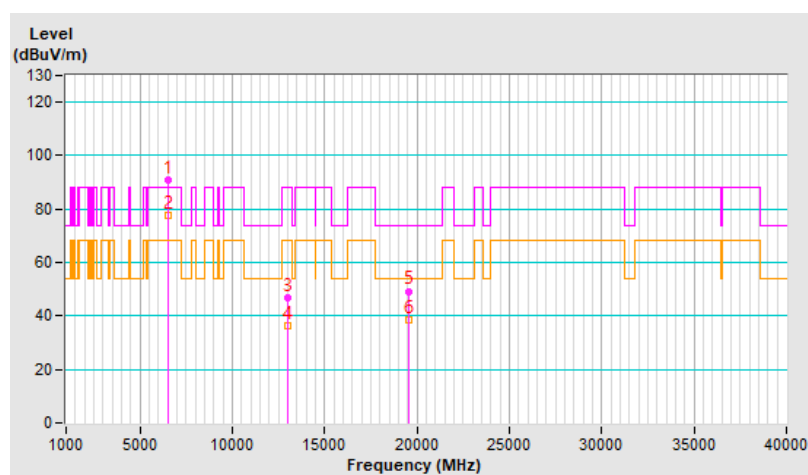


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.6 PK			1.70 V	83	89.4	7.2
2	*6515.00	90.8 AV			1.70 V	83	83.6	7.2
3	#13030.00	47.0 PK	88.2	-41.2	1.78 V	268	32.0	15.0
4	#13030.00	36.5 AV	68.2	-31.7	1.78 V	268	21.5	15.0
5	19545.00	49.4 PK	74.0	-24.6	2.68 V	174	54.2	-4.8
6	19545.00	38.3 AV	54.0	-15.7	2.68 V	174	43.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

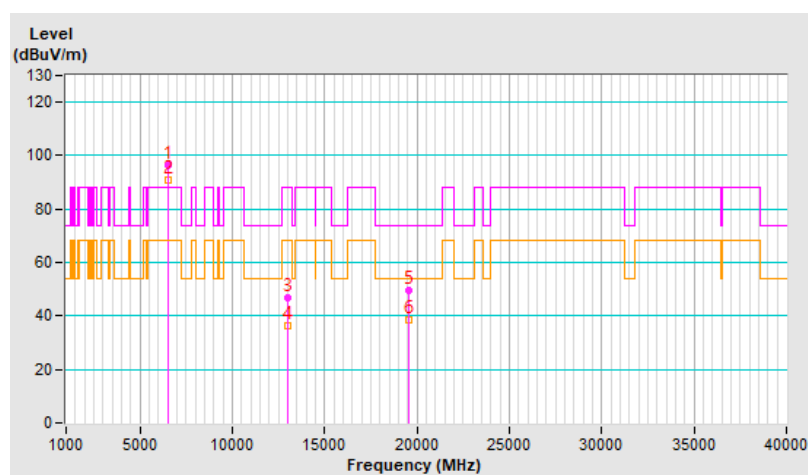


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	91.2 PK			1.61 H	147	83.8	7.4
2	*6535.00	78.0 AV			1.61 H	147	70.6	7.4
3	#13070.00	47.1 PK	88.2	-41.1	1.70 H	258	32.0	15.1
4	#13070.00	36.6 AV	68.2	-31.6	1.70 H	258	21.5	15.1
5	19605.00	49.8 PK	74.0	-24.2	2.66 H	163	54.6	-4.8
6	19605.00	38.8 AV	54.0	-15.2	2.66 H	163	43.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

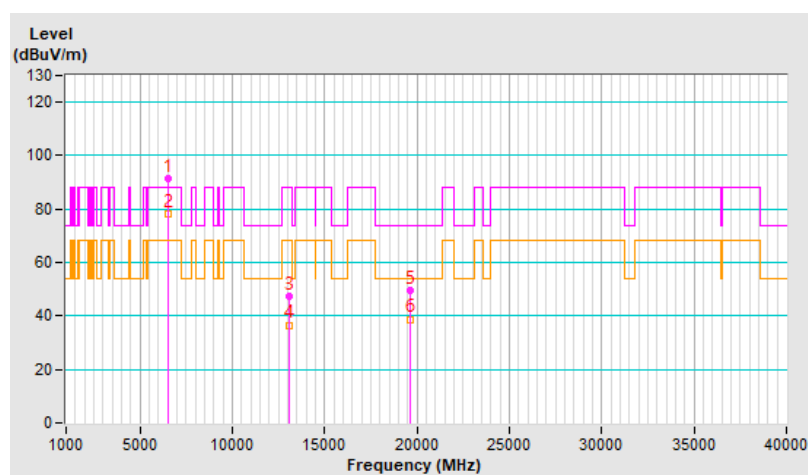


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	102.2 PK			1.73 V	85	94.8	7.4
2	*6535.00	92.0 AV			1.73 V	85	84.6	7.4
3	#13070.00	47.5 PK	88.2	-40.7	1.77 V	275	32.4	15.1
4	#13070.00	36.8 AV	68.2	-31.4	1.77 V	275	21.7	15.1
5	19605.00	49.2 PK	74.0	-24.8	2.69 V	161	54.0	-4.8
6	19605.00	37.9 AV	54.0	-16.1	2.69 V	161	42.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

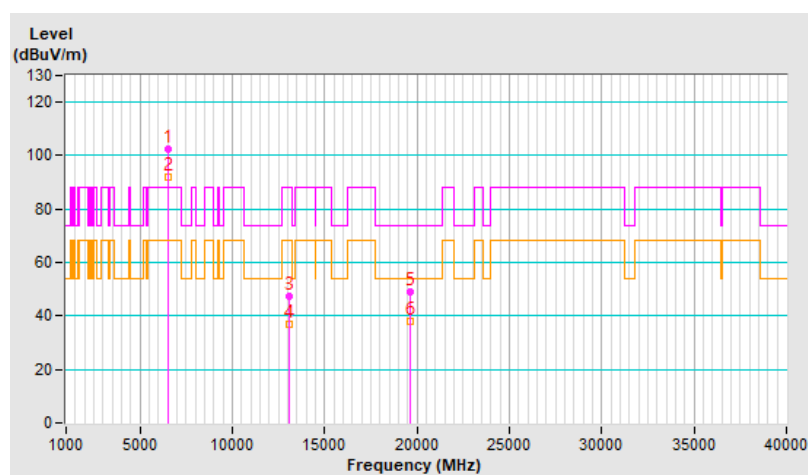


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	91.1 PK			1.56 H	134	82.9	8.2
2	*6855.00	77.9 AV			1.56 H	134	69.7	8.2
3	#13710.00	46.7 PK	88.2	-41.5	1.70 H	278	30.4	16.3
4	#13710.00	36.3 AV	68.2	-31.9	1.70 H	278	20.0	16.3
5	20565.00	49.4 PK	74.0	-24.6	2.61 H	165	53.1	-3.7
6	20565.00	38.1 AV	54.0	-15.9	2.61 H	165	41.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

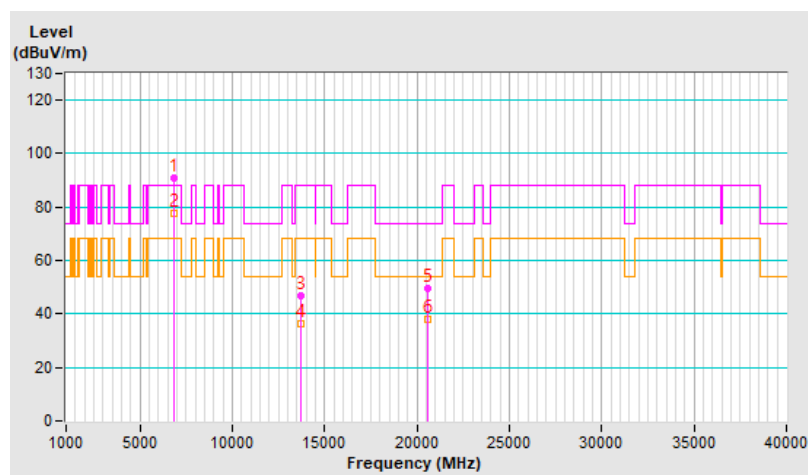


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	101.8 PK			1.75 V	85	93.6	8.2
2	*6855.00	91.3 AV			1.75 V	85	83.1	8.2
3	#13710.00	46.4 PK	88.2	-41.8	1.72 V	285	30.1	16.3
4	#13710.00	36.0 AV	68.2	-32.2	1.72 V	285	19.7	16.3
5	20565.00	50.1 PK	74.0	-23.9	2.66 V	175	53.8	-3.7
6	20565.00	38.7 AV	54.0	-15.3	2.66 V	175	42.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

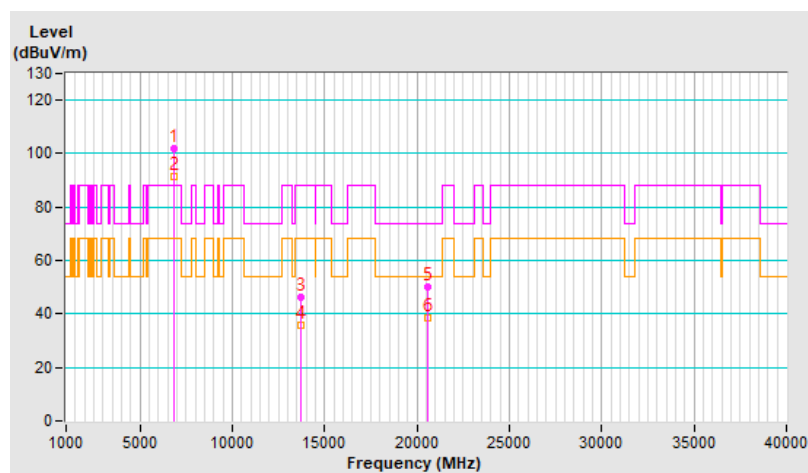


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	90.5 PK			1.55 H	124	82.2	8.3
2	*6875.00	77.6 AV			1.55 H	124	69.3	8.3
3	#13750.00	46.5 PK	88.2	-41.7	1.68 H	258	30.0	16.5
4	#13750.00	36.3 AV	68.2	-31.9	1.68 H	258	19.8	16.5
5	20625.00	49.8 PK	74.0	-24.2	2.70 H	178	53.5	-3.7
6	20625.00	38.6 AV	54.0	-15.4	2.70 H	178	42.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

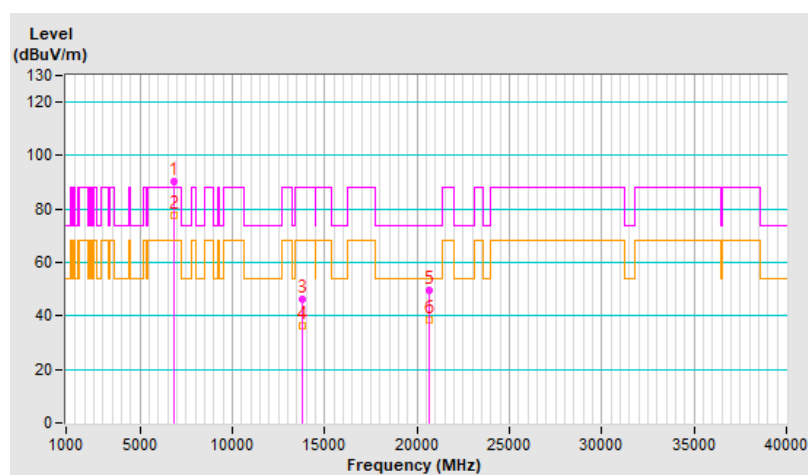


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.7 PK			1.60 V	269	94.4	8.3
2	*6875.00	90.6 AV			1.60 V	269	82.3	8.3
3	#13750.00	47.2 PK	88.2	-41.0	1.72 V	283	30.7	16.5
4	#13750.00	36.6 AV	68.2	-31.6	1.72 V	283	20.1	16.5
5	20625.00	49.2 PK	74.0	-24.8	2.65 V	165	52.9	-3.7
6	20625.00	38.1 AV	54.0	-15.9	2.65 V	165	41.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

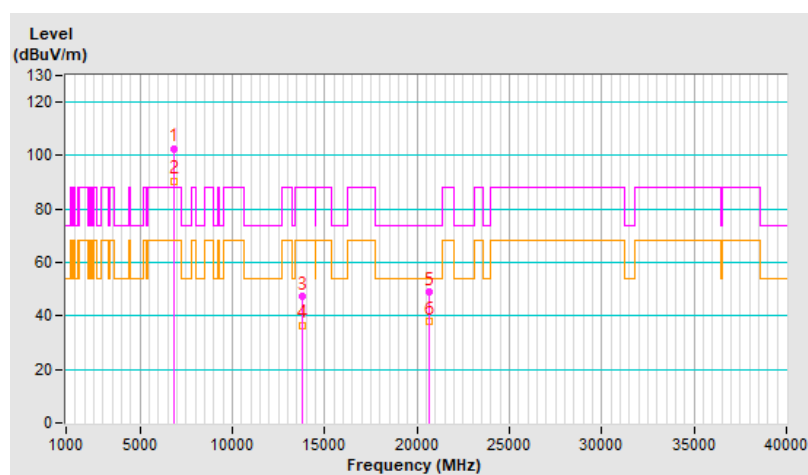


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.4 PK			1.63 H	134	85.4	10.0
2	*7115.00	86.7 AV			1.63 H	134	76.7	10.0
3	#7125.00	56.1 PK	88.2	-32.1	1.63 H	134	46.0	10.1
4	#7125.00	43.8 AV	68.2	-24.4	1.63 H	134	33.7	10.1
5	#14230.00	46.6 PK	88.2	-41.6	1.74 H	270	27.9	18.7
6	#14230.00	36.1 AV	68.2	-32.1	1.74 H	270	17.4	18.7
7	21345.00	49.9 PK	74.0	-24.1	2.60 H	182	52.4	-2.5
8	21345.00	38.8 AV	54.0	-15.2	2.60 H	182	41.3	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

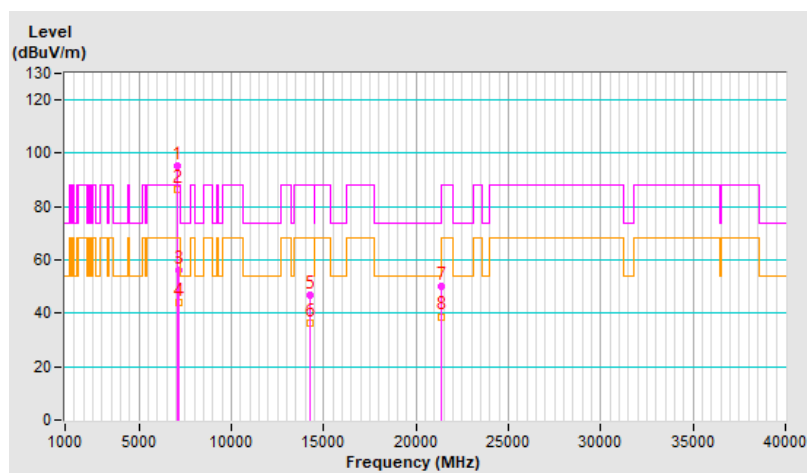


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.0 PK			1.61 V	91	89.0	10.0
2	*7115.00	89.5 AV			1.61 V	91	79.5	10.0
3	#7125.00	64.2 PK	88.2	-24.0	1.61 V	91	54.1	10.1
4	#7125.00	44.7 AV	68.2	-23.5	1.61 V	91	34.6	10.1
5	#14230.00	46.3 PK	88.2	-41.9	1.70 V	252	27.6	18.7
6	#14230.00	36.1 AV	68.2	-32.1	1.70 V	252	17.4	18.7
7	21345.00	48.9 PK	74.0	-25.1	2.62 V	165	51.4	-2.5
8	21345.00	38.2 AV	54.0	-15.8	2.62 V	165	40.7	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

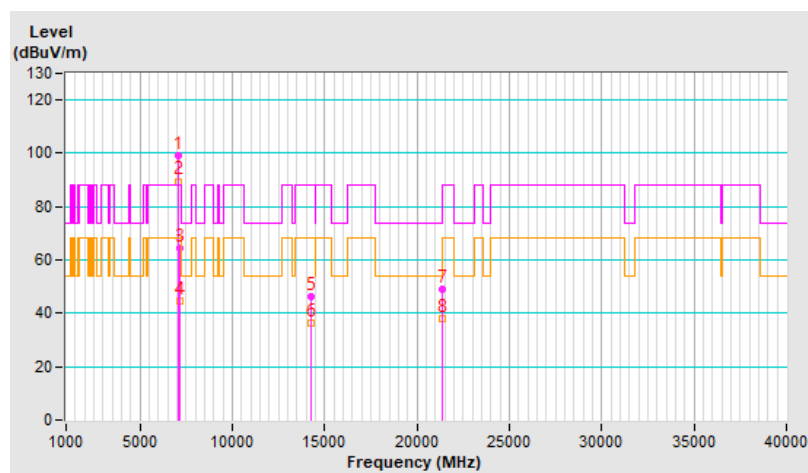


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	1.01 H	218	45.6	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.01 H	218	34.0	5.6
3	*5955.00	86.6 PK			1.01 H	218	81.1	5.5
4	*5955.00	77.3 AV			1.01 H	218	71.8	5.5
5	11910.00	46.2 PK	74.0	-27.8	1.76 H	260	31.6	14.6
6	11910.00	35.9 AV	54.0	-18.1	1.76 H	260	21.3	14.6
7	17865.00	48.9 PK	74.0	-25.1	2.61 H	182	23.0	25.9
8	17865.00	38.0 AV	54.0	-16.0	2.61 H	182	12.1	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

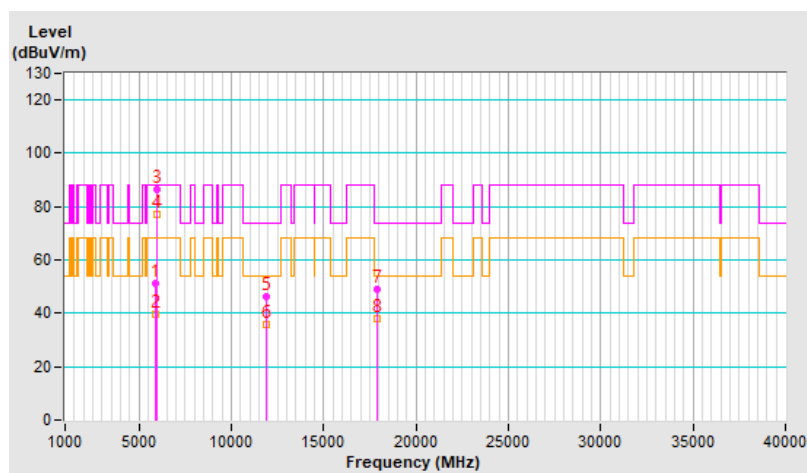


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.8 PK	88.2	-37.4	1.85 V	276	45.2	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.85 V	276	33.9	5.6
3	*5955.00	101.9 PK			1.85 V	276	96.4	5.5
4	*5955.00	90.3 AV			1.85 V	276	84.8	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.77 V	259	32.1	14.6
6	11910.00	36.2 AV	54.0	-17.8	1.77 V	259	21.6	14.6
7	17865.00	49.3 PK	74.0	-24.7	2.61 V	162	23.4	25.9
8	17865.00	38.2 AV	54.0	-15.8	2.61 V	162	12.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

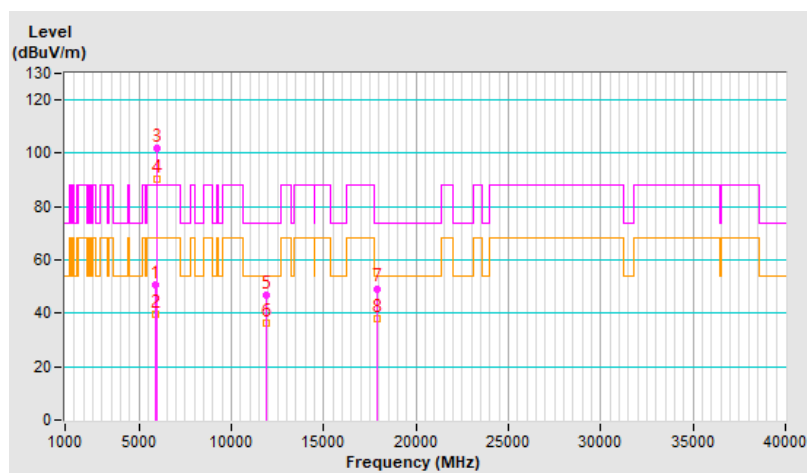


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	91.6 PK			1.60 H	129	84.8	6.8
2	*6415.00	78.2 AV			1.60 H	129	71.4	6.8
3	#12830.00	46.7 PK	88.2	-41.5	1.72 H	260	31.6	15.1
4	#12830.00	36.2 AV	68.2	-32.0	1.72 H	260	21.1	15.1
5	19245.00	49.6 PK	74.0	-24.4	2.63 H	180	54.2	-4.6
6	19245.00	38.2 AV	54.0	-15.8	2.63 H	180	42.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

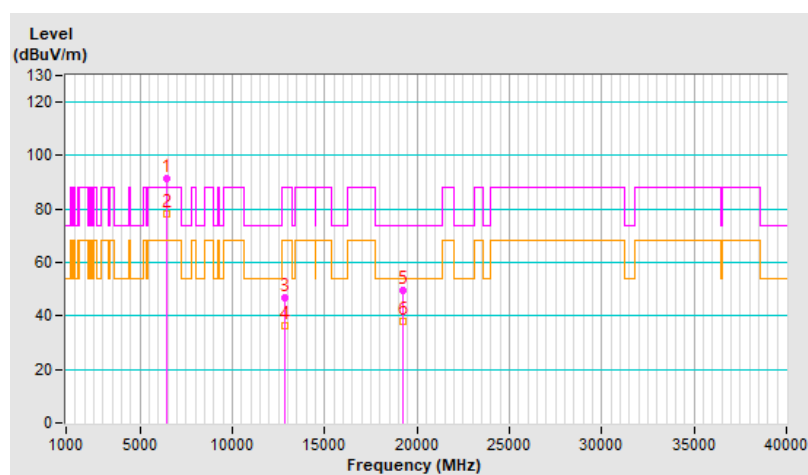


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	103.9 PK			1.97 V	263	97.1	6.8
2	*6415.00	92.6 AV			1.97 V	263	85.8	6.8
3	#12830.00	46.5 PK	88.2	-41.7	1.74 V	267	31.4	15.1
4	#12830.00	36.1 AV	68.2	-32.1	1.74 V	267	21.0	15.1
5	19245.00	49.8 PK	74.0	-24.2	2.61 V	159	54.4	-4.6
6	19245.00	38.8 AV	54.0	-15.2	2.61 V	159	43.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

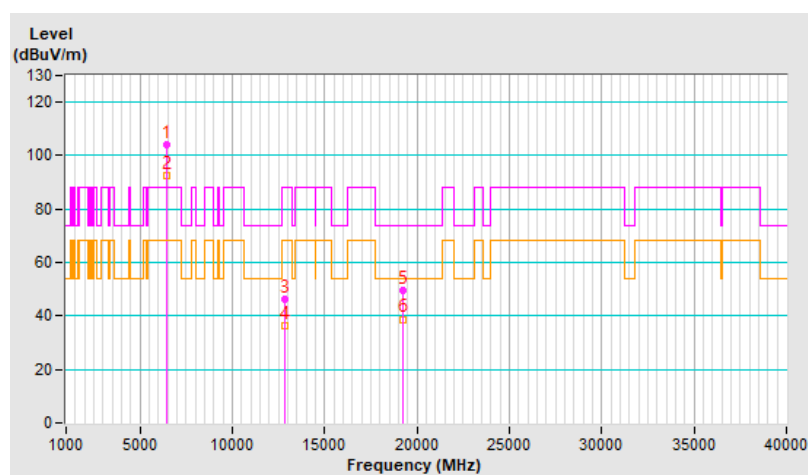


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	91.4 PK			1.56 H	145	84.5	6.9
2	*6435.00	77.9 AV			1.56 H	145	71.0	6.9
3	#12870.00	46.4 PK	88.2	-41.8	1.76 H	267	31.2	15.2
4	#12870.00	36.1 AV	68.2	-32.1	1.76 H	267	20.9	15.2
5	19305.00	49.9 PK	74.0	-24.1	2.61 H	178	54.4	-4.5
6	19305.00	38.9 AV	54.0	-15.1	2.61 H	178	43.4	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

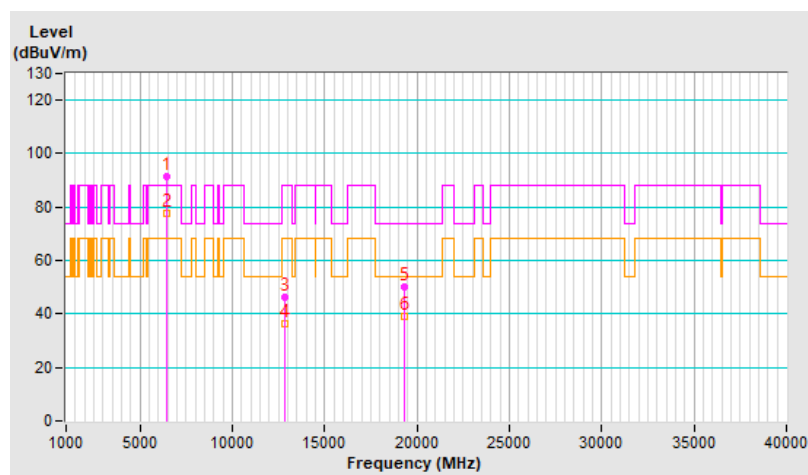


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.3 PK			1.30 V	86	95.4	6.9
2	*6435.00	89.5 AV			1.30 V	86	82.6	6.9
3	#12870.00	46.8 PK	88.2	-41.4	1.80 V	281	31.6	15.2
4	#12870.00	36.6 AV	68.2	-31.6	1.80 V	281	21.4	15.2
5	19305.00	50.0 PK	74.0	-24.0	2.67 V	167	54.5	-4.5
6	19305.00	38.8 AV	54.0	-15.2	2.67 V	167	43.3	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

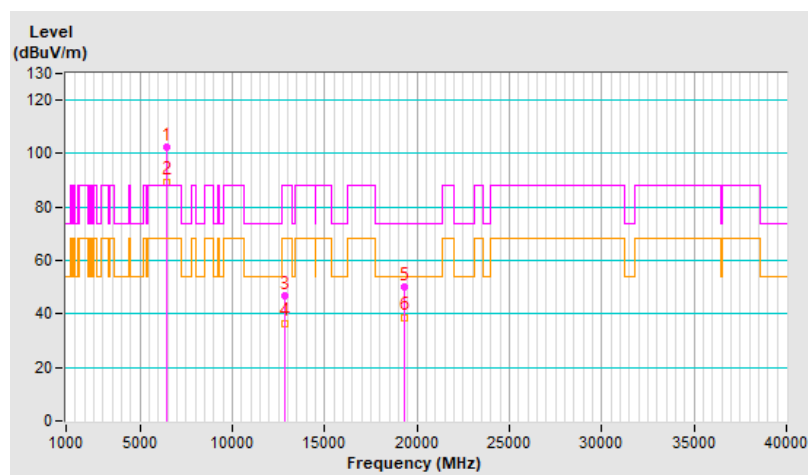


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	91.7 PK			1.63 H	138	84.5	7.2
2	*6515.00	78.3 AV			1.63 H	138	71.1	7.2
3	#13030.00	46.8 PK	88.2	-41.4	1.73 H	281	31.8	15.0
4	#13030.00	36.5 AV	68.2	-31.7	1.73 H	281	21.5	15.0
5	19545.00	49.7 PK	74.0	-24.3	2.67 H	161	54.5	-4.8
6	19545.00	38.7 AV	54.0	-15.3	2.67 H	161	43.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

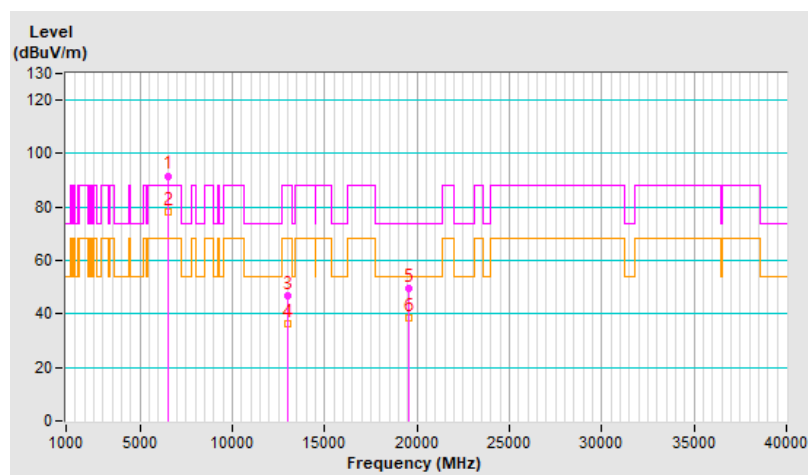


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.9 PK			1.21 V	86	94.7	7.2
2	*6515.00	89.9 AV			1.21 V	86	82.7	7.2
3	#13030.00	46.9 PK	88.2	-41.3	1.71 V	286	31.9	15.0
4	#13030.00	36.5 AV	68.2	-31.7	1.71 V	286	21.5	15.0
5	19545.00	49.1 PK	74.0	-24.9	2.68 V	162	53.9	-4.8
6	19545.00	38.2 AV	54.0	-15.8	2.68 V	162	43.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

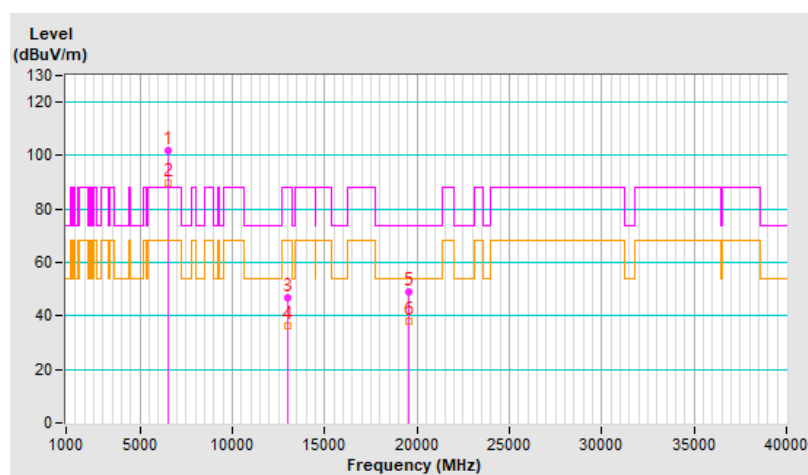


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	90.8 PK			1.62 H	145	83.4	7.4
2	*6535.00	77.9 AV			1.62 H	145	70.5	7.4
3	#13070.00	47.0 PK	88.2	-41.2	1.68 H	262	31.9	15.1
4	#13070.00	36.5 AV	68.2	-31.7	1.68 H	262	21.4	15.1
5	19605.00	49.7 PK	74.0	-24.3	2.61 H	172	54.5	-4.8
6	19605.00	38.3 AV	54.0	-15.7	2.61 H	172	43.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

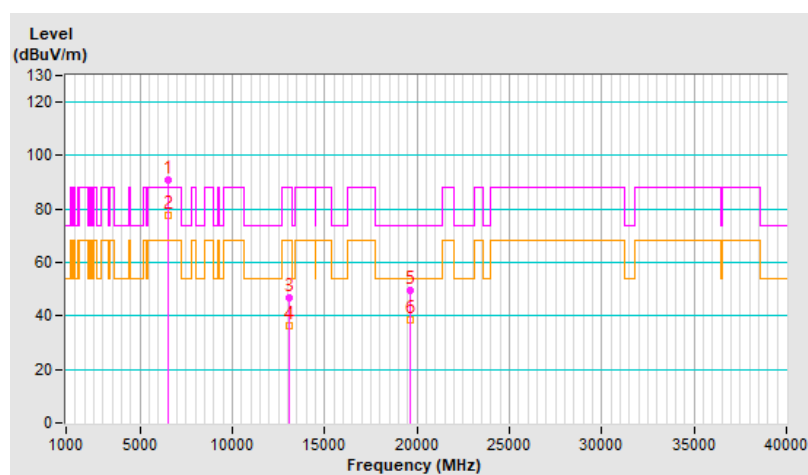


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	101.6 PK			1.18 V	94	94.2	7.4
2	*6535.00	89.7 AV			1.18 V	94	82.3	7.4
3	#13070.00	46.2 PK	88.2	-42.0	1.77 V	259	31.1	15.1
4	#13070.00	35.8 AV	68.2	-32.4	1.77 V	259	20.7	15.1
5	19605.00	49.6 PK	74.0	-24.4	2.62 V	174	54.4	-4.8
6	19605.00	38.6 AV	54.0	-15.4	2.62 V	174	43.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

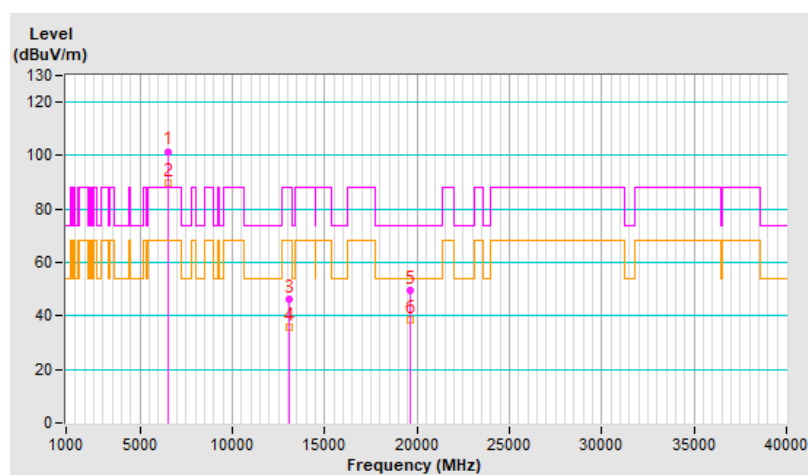


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	91.3 PK			1.62 H	136	83.1	8.2
2	*6855.00	77.9 AV			1.62 H	136	69.7	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.70 H	284	30.7	16.3
4	#13710.00	36.7 AV	68.2	-31.5	1.70 H	284	20.4	16.3
5	20565.00	50.1 PK	74.0	-23.9	2.60 H	181	53.8	-3.7
6	20565.00	38.8 AV	54.0	-15.2	2.60 H	181	42.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

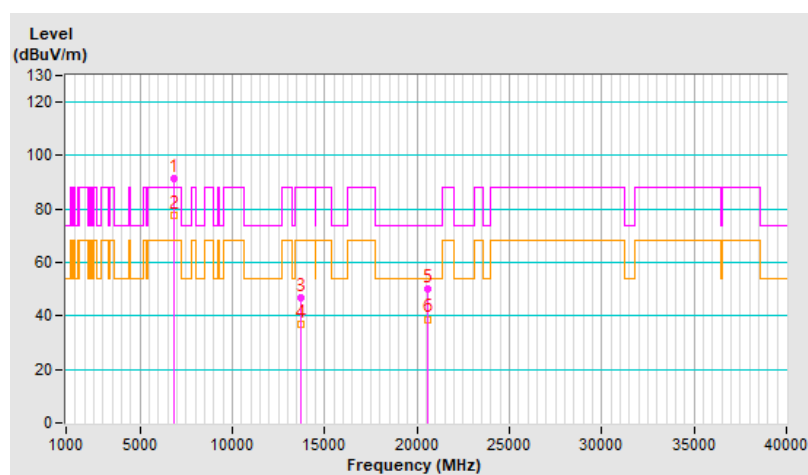


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	102.2 PK			1.27 V	70	94.0	8.2
2	*6855.00	90.3 AV			1.27 V	70	82.1	8.2
3	#13710.00	46.6 PK	88.2	-41.6	1.70 V	262	30.3	16.3
4	#13710.00	36.2 AV	68.2	-32.0	1.70 V	262	19.9	16.3
5	20565.00	49.7 PK	74.0	-24.3	2.66 V	164	53.4	-3.7
6	20565.00	38.3 AV	54.0	-15.7	2.66 V	164	42.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

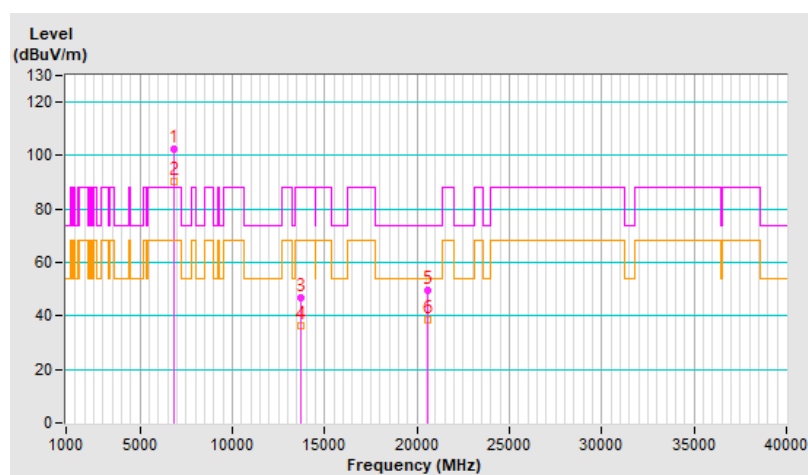


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	90.9 PK			1.55 H	152	82.6	8.3
2	*6875.00	77.6 AV			1.55 H	152	69.3	8.3
3	#13750.00	46.7 PK	88.2	-41.5	1.78 H	267	30.2	16.5
4	#13750.00	36.4 AV	68.2	-31.8	1.78 H	267	19.9	16.5
5	20625.00	49.5 PK	74.0	-24.5	2.67 H	181	53.2	-3.7
6	20625.00	38.2 AV	54.0	-15.8	2.67 H	181	41.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

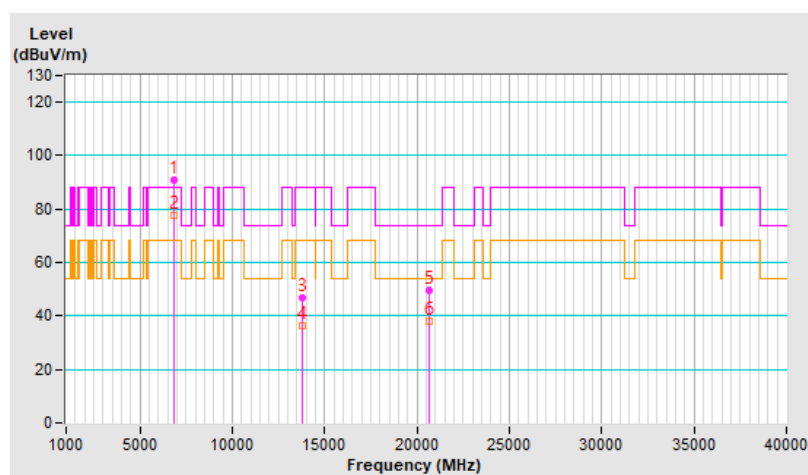


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.3 PK			1.16 V	87	94.0	8.3
2	*6875.00	90.3 AV			1.16 V	87	82.0	8.3
3	#13750.00	46.4 PK	88.2	-41.8	1.79 V	265	29.9	16.5
4	#13750.00	35.8 AV	68.2	-32.4	1.79 V	265	19.3	16.5
5	20625.00	49.8 PK	74.0	-24.2	2.70 V	176	53.5	-3.7
6	20625.00	38.8 AV	54.0	-15.2	2.70 V	176	42.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

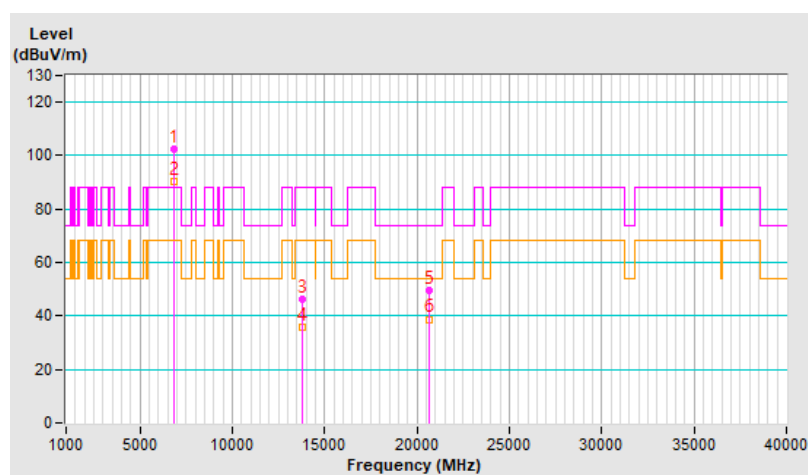


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.3 PK			1.53 H	298	79.3	10.0
2	*7115.00	75.3 AV			1.53 H	298	65.3	10.0
3	#7125.00	54.8 PK	88.2	-33.4	1.53 H	298	44.7	10.1
4	#7125.00	47.4 AV	68.2	-20.8	1.53 H	298	37.3	10.1
5	#14230.00	47.3 PK	88.2	-40.9	1.68 H	259	28.6	18.7
6	#14230.00	36.7 AV	68.2	-31.5	1.68 H	259	18.0	18.7
7	21345.00	49.5 PK	74.0	-24.5	2.66 H	172	52.0	-2.5
8	21345.00	38.4 AV	54.0	-15.6	2.66 H	172	40.9	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

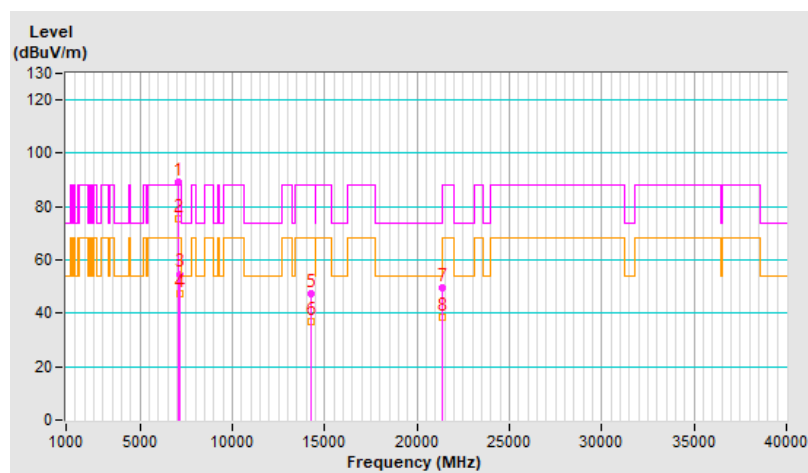


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.4 PK			1.82 V	269	92.4	10.0
2	*7115.00	90.7 AV			1.82 V	269	80.7	10.0
3	#7125.00	60.9 PK	88.2	-27.3	1.82 V	269	50.8	10.1
4	#7125.00	51.1 AV	68.2	-17.1	1.82 V	269	41.0	10.1
5	#14230.00	46.9 PK	88.2	-41.3	1.74 V	263	28.2	18.7
6	#14230.00	36.3 AV	68.2	-31.9	1.74 V	263	17.6	18.7
7	21345.00	49.3 PK	74.0	-24.7	2.70 V	184	51.8	-2.5
8	21345.00	38.0 AV	54.0	-16.0	2.70 V	184	40.5	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

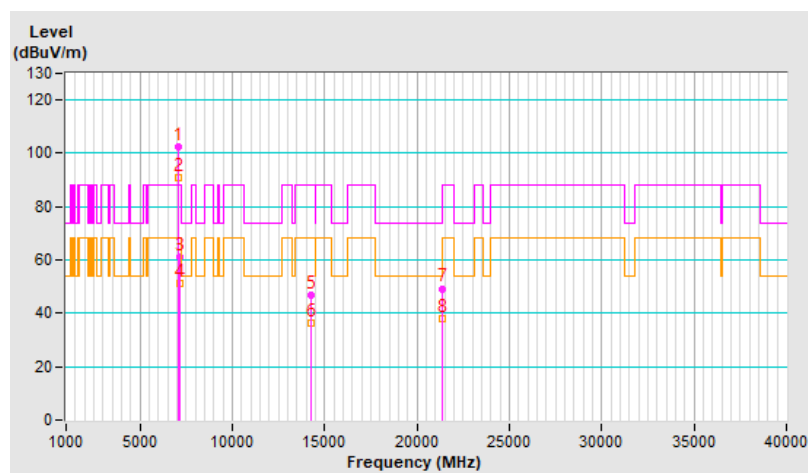


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.7 PK	88.2	-36.5	1.00 H	218	46.1	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.00 H	218	34.0	5.6
3	*5985.00	89.7 PK			1.00 H	218	84.2	5.5
4	*5985.00	77.9 AV			1.00 H	218	72.4	5.5
5	11970.00	46.9 PK	74.0	-27.1	1.68 H	277	32.4	14.5
6	11970.00	36.6 AV	54.0	-17.4	1.68 H	277	22.1	14.5
7	17955.00	49.7 PK	74.0	-24.3	2.69 H	167	21.4	28.3
8	17955.00	38.2 AV	54.0	-15.8	2.69 H	167	9.9	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

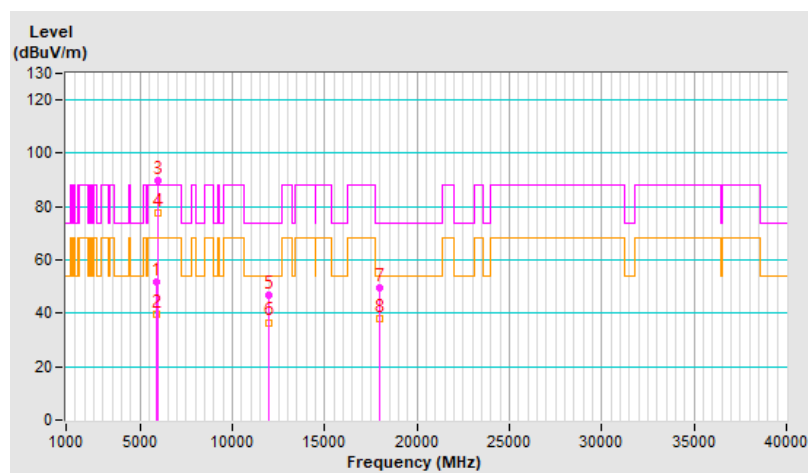


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.5 PK	88.2	-33.7	1.81 V	253	48.9	5.6
2	#5925.00	41.8 AV	68.2	-26.4	1.81 V	253	36.2	5.6
3	*5985.00	101.3 PK			1.81 V	253	95.8	5.5
4	*5985.00	90.2 AV			1.81 V	253	84.7	5.5
5	11970.00	47.4 PK	74.0	-26.6	1.79 V	271	32.9	14.5
6	11970.00	36.6 AV	54.0	-17.4	1.79 V	271	22.1	14.5
7	17955.00	49.1 PK	74.0	-24.9	2.69 V	156	20.8	28.3
8	17955.00	38.0 AV	54.0	-16.0	2.69 V	156	9.7	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

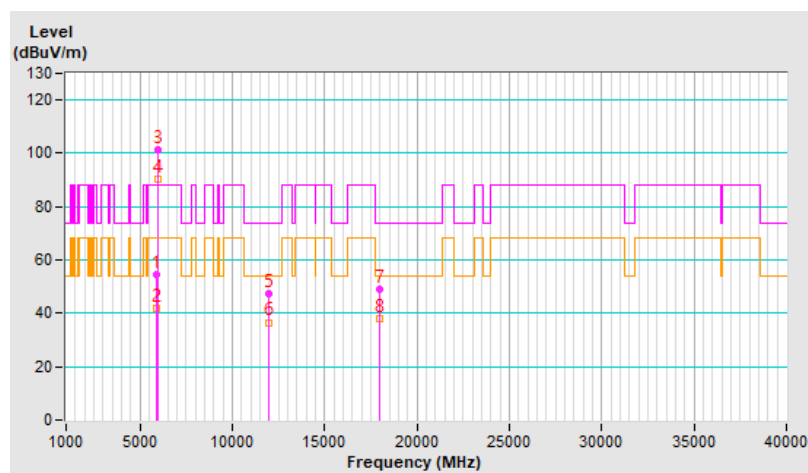


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	89.6 PK			1.02 H	227	83.0	6.6
2	*6385.00	77.9 AV			1.02 H	227	71.3	6.6
3	#12770.00	46.4 PK	88.2	-41.8	1.79 H	282	31.5	14.9
4	#12770.00	35.8 AV	68.2	-32.4	1.79 H	282	20.9	14.9
5	19155.00	49.7 PK	74.0	-24.3	2.61 H	160	54.4	-4.7
6	19155.00	38.3 AV	54.0	-15.7	2.61 H	160	43.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

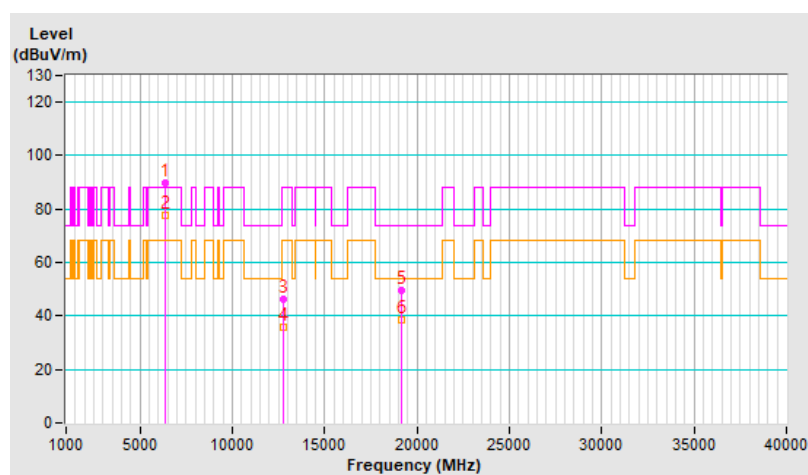


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	101.5 PK			1.67 V	89	94.9	6.6
2	*6385.00	87.2 AV			1.67 V	89	80.6	6.6
3	#12770.00	46.6 PK	88.2	-41.6	1.73 V	286	31.7	14.9
4	#12770.00	36.0 AV	68.2	-32.2	1.73 V	286	21.1	14.9
5	19155.00	49.2 PK	74.0	-24.8	2.68 V	180	53.9	-4.7
6	19155.00	38.1 AV	54.0	-15.9	2.68 V	180	42.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

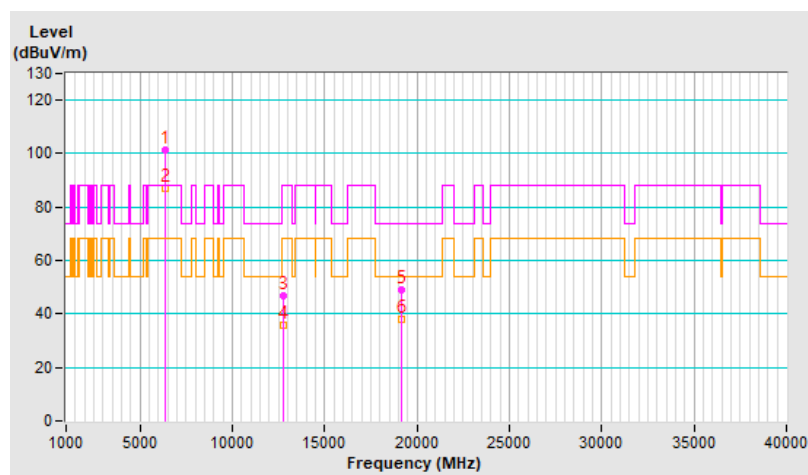


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	90.1 PK			1.00 H	226	83.1	7.0
2	*6465.00	78.2 AV			1.00 H	226	71.2	7.0
3	#12930.00	46.1 PK	88.2	-42.1	1.70 H	265	30.9	15.2
4	#12930.00	35.8 AV	68.2	-32.4	1.70 H	265	20.6	15.2
5	19395.00	50.2 PK	74.0	-23.8	2.64 H	160	54.7	-4.5
6	19395.00	38.8 AV	54.0	-15.2	2.64 H	160	43.3	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

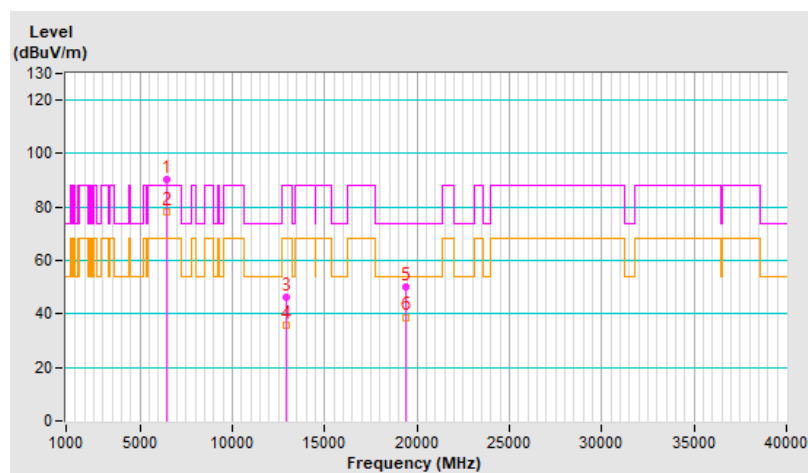


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	100.9 PK			1.70 V	96	93.9	7.0
2	*6465.00	86.7 AV			1.70 V	96	79.7	7.0
3	#12930.00	46.5 PK	88.2	-41.7	1.69 V	276	31.3	15.2
4	#12930.00	36.3 AV	68.2	-31.9	1.69 V	276	21.1	15.2
5	19395.00	49.3 PK	74.0	-24.7	2.71 V	171	53.8	-4.5
6	19395.00	38.3 AV	54.0	-15.7	2.71 V	171	42.8	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

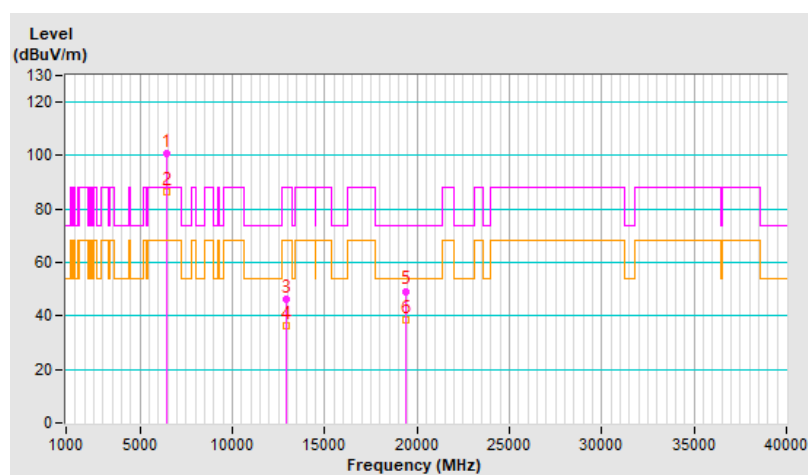


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	89.5 PK			1.00 H	215	82.1	7.4
2	*6545.00	77.5 AV			1.00 H	215	70.1	7.4
3	#13090.00	46.6 PK	88.2	-41.6	1.68 H	284	31.4	15.2
4	#13090.00	36.1 AV	68.2	-32.1	1.68 H	284	20.9	15.2
5	19635.00	49.2 PK	74.0	-24.8	2.72 H	179	53.9	-4.7
6	19635.00	38.3 AV	54.0	-15.7	2.72 H	179	43.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

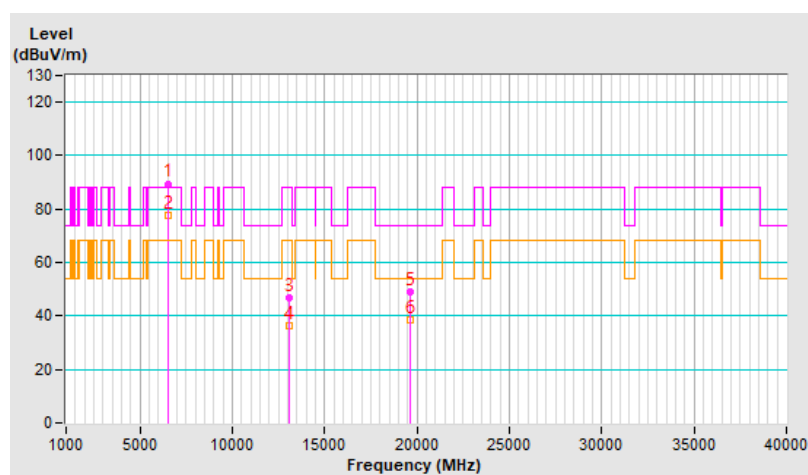


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	101.5 PK			1.63 V	82	94.1	7.4
2	*6545.00	87.3 AV			1.63 V	82	79.9	7.4
3	#13090.00	47.2 PK	88.2	-41.0	1.76 V	281	32.0	15.2
4	#13090.00	36.6 AV	68.2	-31.6	1.76 V	281	21.4	15.2
5	19635.00	49.7 PK	74.0	-24.3	2.69 V	172	54.4	-4.7
6	19635.00	38.7 AV	54.0	-15.3	2.69 V	172	43.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

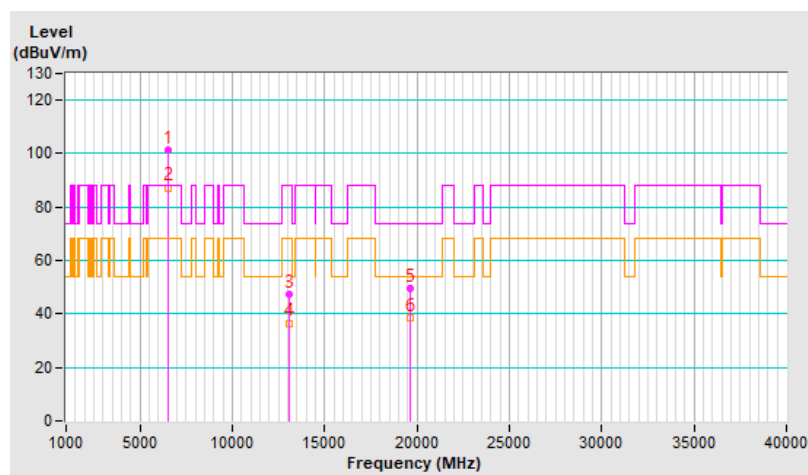


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	90.1 PK			1.01 H	214	82.3	7.8
2	*6625.00	78.1 AV			1.01 H	214	70.3	7.8
3	13250.00	47.4 PK	74.0	-26.6	1.76 H	264	32.0	15.4
4	13250.00	36.6 AV	54.0	-17.4	1.76 H	264	21.2	15.4
5	19875.00	50.3 PK	74.0	-23.7	2.61 H	165	54.8	-4.5
6	19875.00	39.0 AV	54.0	-15.0	2.61 H	165	43.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

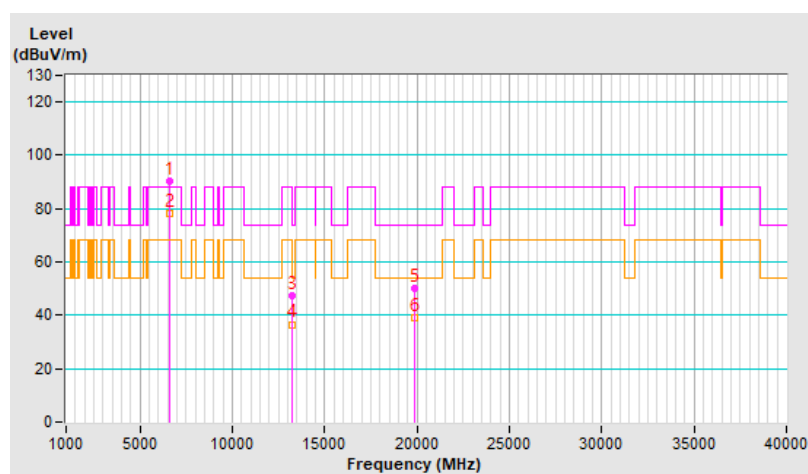


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	101.0 PK			1.66 V	97	93.2	7.8
2	*6625.00	86.8 AV			1.66 V	97	79.0	7.8
3	13250.00	46.4 PK	74.0	-27.6	1.77 V	262	31.0	15.4
4	13250.00	35.9 AV	54.0	-18.1	1.77 V	262	20.5	15.4
5	19875.00	49.2 PK	74.0	-24.8	2.63 V	168	53.7	-4.5
6	19875.00	38.1 AV	54.0	-15.9	2.63 V	168	42.6	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

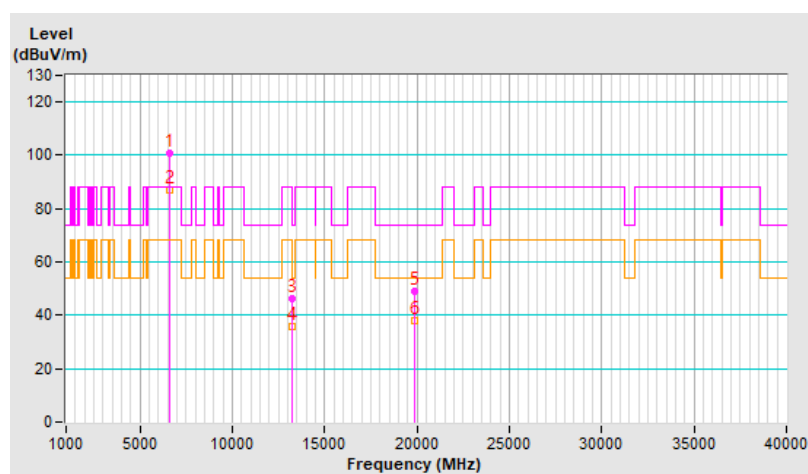


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	89.8 PK			1.02 H	208	82.1	7.7
2	*6785.00	78.0 AV			1.02 H	208	70.3	7.7
3	#13570.00	47.3 PK	88.2	-40.9	1.74 H	264	31.6	15.7
4	#13570.00	36.6 AV	68.2	-31.6	1.74 H	264	20.9	15.7
5	20355.00	50.1 PK	74.0	-23.9	2.64 H	164	53.9	-3.8
6	20355.00	38.6 AV	54.0	-15.4	2.64 H	164	42.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

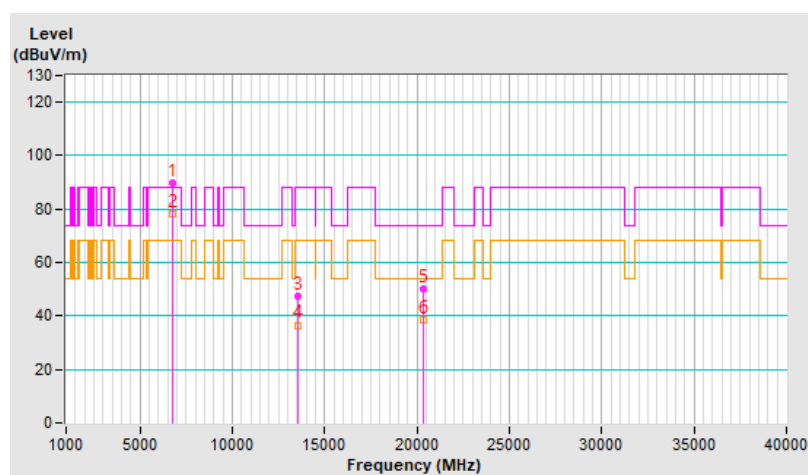


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	102.0 PK			1.70 V	86	94.3	7.7
2	*6785.00	87.6 AV			1.70 V	86	79.9	7.7
3	#13570.00	46.6 PK	88.2	-41.6	1.77 V	282	30.9	15.7
4	#13570.00	36.4 AV	68.2	-31.8	1.77 V	282	20.7	15.7
5	20355.00	49.7 PK	74.0	-24.3	2.71 V	162	53.5	-3.8
6	20355.00	38.6 AV	54.0	-15.4	2.71 V	162	42.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

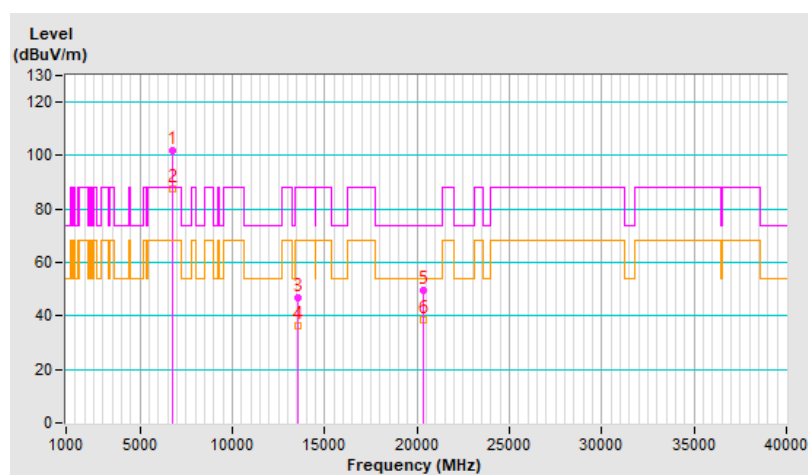


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	90.1 PK			1.00 H	202	81.9	8.2
2	*6865.00	78.1 AV			1.00 H	202	69.9	8.2
3	#13730.00	46.6 PK	88.2	-41.6	1.75 H	277	30.2	16.4
4	#13730.00	36.3 AV	68.2	-31.9	1.75 H	277	19.9	16.4
5	20595.00	49.6 PK	74.0	-24.4	2.64 H	157	53.4	-3.8
6	20595.00	38.6 AV	54.0	-15.4	2.64 H	157	42.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

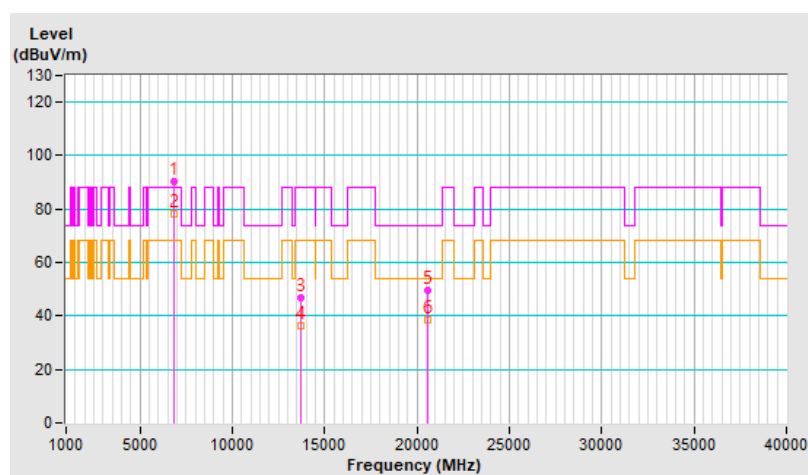


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	101.6 PK			1.68 V	84	93.4	8.2
2	*6865.00	87.1 AV			1.68 V	84	78.9	8.2
3	#13730.00	47.0 PK	88.2	-41.2	1.80 V	276	30.6	16.4
4	#13730.00	36.6 AV	68.2	-31.6	1.80 V	276	20.2	16.4
5	20595.00	49.7 PK	74.0	-24.3	2.64 V	159	53.5	-3.8
6	20595.00	38.5 AV	54.0	-15.5	2.64 V	159	42.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

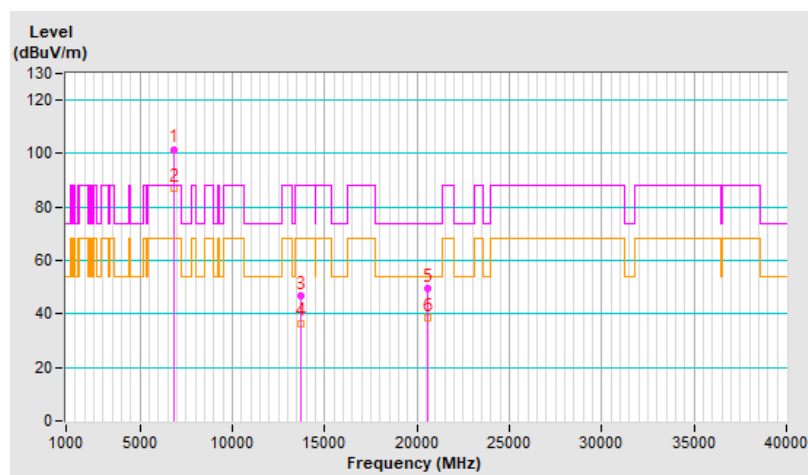


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	85.8 PK			1.41 H	328	76.9	8.9
2	*7025.00	74.1 AV			1.41 H	328	65.2	8.9
3	#7125.00	56.7 PK	88.2	-31.5	1.41 H	328	46.6	10.1
4	#7125.00	44.4 AV	68.2	-23.8	1.41 H	328	34.3	10.1
5	#14050.00	46.4 PK	88.2	-41.8	1.70 H	263	28.7	17.7
6	#14050.00	36.0 AV	68.2	-32.2	1.70 H	263	18.3	17.7
7	21075.00	49.9 PK	74.0	-24.1	2.64 H	173	52.9	-3.0
8	21075.00	38.7 AV	54.0	-15.3	2.64 H	173	41.7	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

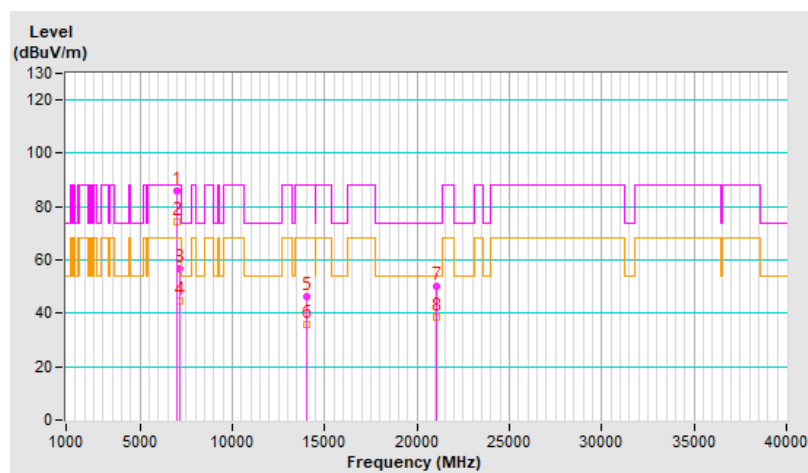


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	103.7 PK			1.98 V	278	94.8	8.9
2	*7025.00	91.8 AV			1.98 V	278	82.9	8.9
3	#7125.00	56.7 PK	88.2	-31.5	1.98 V	278	46.6	10.1
4	#7125.00	44.6 AV	68.2	-23.6	1.98 V	278	34.5	10.1
5	#14050.00	47.2 PK	88.2	-41.0	1.78 V	263	29.5	17.7
6	#14050.00	36.5 AV	68.2	-31.7	1.78 V	263	18.8	17.7
7	21075.00	49.8 PK	74.0	-24.2	2.67 V	163	52.8	-3.0
8	21075.00	38.6 AV	54.0	-15.4	2.67 V	163	41.6	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

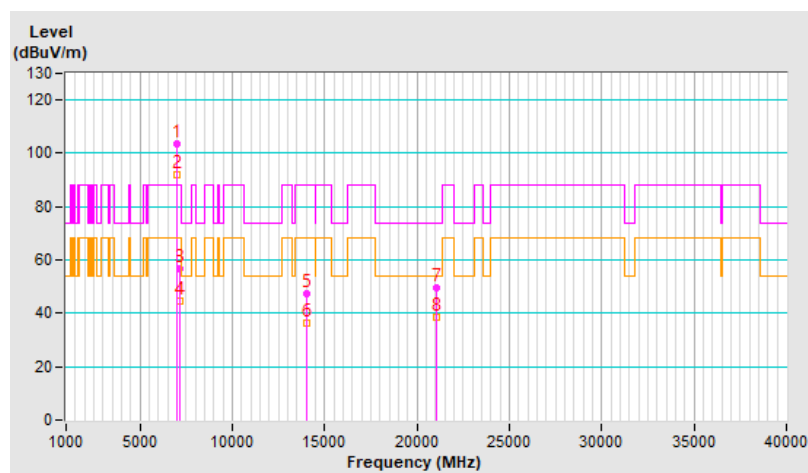


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.4 PK	88.2	-32.8	1.04 H	224	49.8	5.6
2	#5925.00	42.4 AV	68.2	-25.8	1.04 H	224	36.8	5.6
3	*6025.00	88.6 PK			1.04 H	224	83.0	5.6
4	*6025.00	78.3 AV			1.04 H	224	72.7	5.6
5	12050.00	46.9 PK	74.0	-27.1	1.71 H	275	32.3	14.6
6	12050.00	36.6 AV	54.0	-17.4	1.71 H	275	22.0	14.6
7	18075.00	49.1 PK	74.0	-24.9	2.61 H	173	54.4	-5.3
8	18075.00	38.1 AV	54.0	-15.9	2.61 H	173	43.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

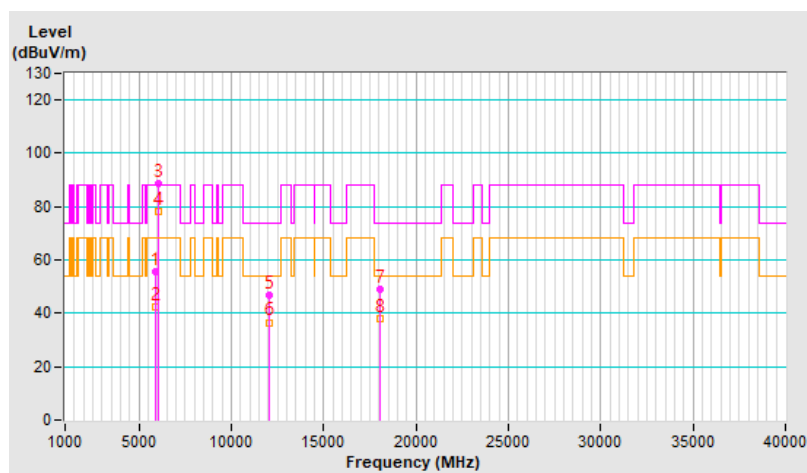


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.9 PK	88.2	-21.3	1.73 V	242	61.3	5.6
2	#5925.00	53.6 AV	68.2	-14.6	1.73 V	242	48.0	5.6
3	*6025.00	100.8 PK			1.73 V	242	95.2	5.6
4	*6025.00	88.7 AV			1.73 V	242	83.1	5.6
5	12050.00	46.9 PK	74.0	-27.1	1.79 V	286	32.3	14.6
6	12050.00	36.4 AV	54.0	-17.6	1.79 V	286	21.8	14.6
7	18075.00	50.1 PK	74.0	-23.9	2.64 V	176	55.4	-5.3
8	18075.00	38.6 AV	54.0	-15.4	2.64 V	176	43.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

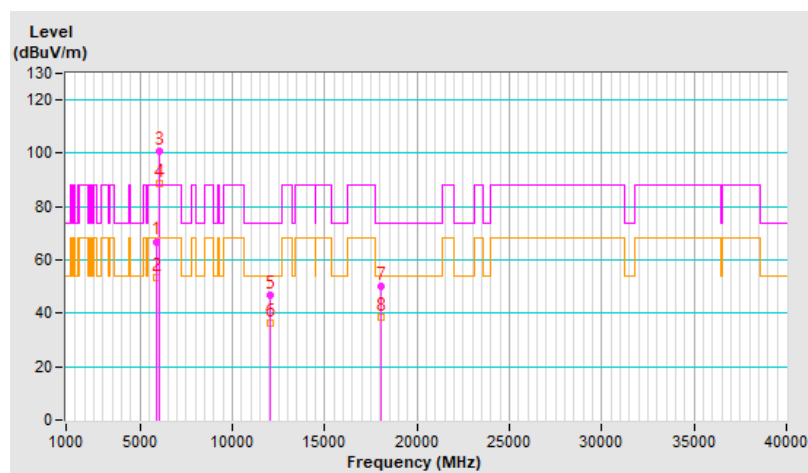


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	88.4 PK			1.04 H	220	82.6	5.8
2	*6185.00	78.3 AV			1.04 H	220	72.5	5.8
3	12370.00	46.7 PK	74.0	-27.3	1.79 H	272	32.0	14.7
4	12370.00	36.0 AV	54.0	-18.0	1.79 H	272	21.3	14.7
5	18555.00	49.8 PK	74.0	-24.2	2.68 H	160	55.2	-5.4
6	18555.00	38.6 AV	54.0	-15.4	2.68 H	160	44.0	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

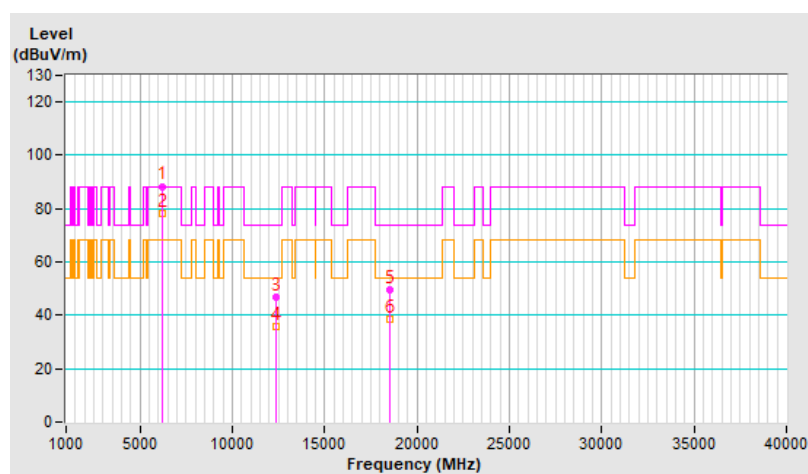


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	100.5 PK			1.73 V	243	94.7	5.8
2	*6185.00	88.4 AV			1.73 V	243	82.6	5.8
3	12370.00	46.8 PK	74.0	-27.2	1.71 V	268	32.1	14.7
4	12370.00	36.6 AV	54.0	-17.4	1.71 V	268	21.9	14.7
5	18555.00	50.0 PK	74.0	-24.0	2.71 V	169	55.4	-5.4
6	18555.00	38.8 AV	54.0	-15.2	2.71 V	169	44.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

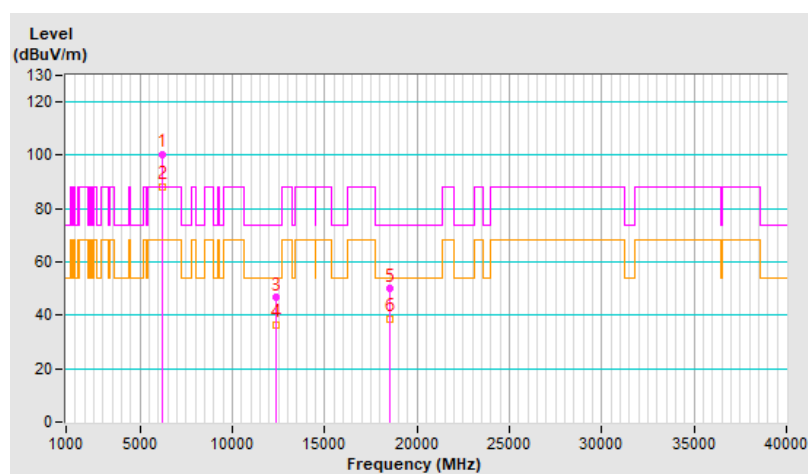


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	88.6 PK			1.04 H	230	82.2	6.4
2	*6345.00	78.2 AV			1.04 H	230	71.8	6.4
3	12690.00	46.0 PK	74.0	-28.0	1.72 H	259	31.1	14.9
4	12690.00	35.8 AV	54.0	-18.2	1.72 H	259	20.9	14.9
5	19035.00	49.5 PK	74.0	-24.5	2.66 H	177	54.4	-4.9
6	19035.00	38.1 AV	54.0	-15.9	2.66 H	177	43.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

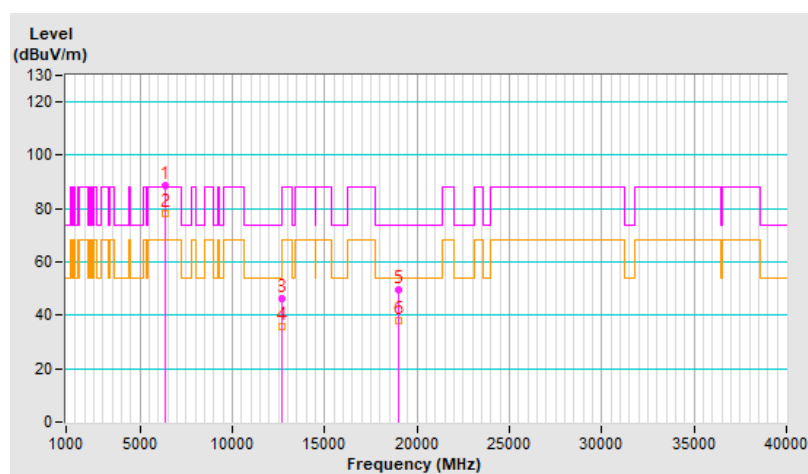


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	101.4 PK			1.72 V	235	95.0	6.4
2	*6345.00	89.1 AV			1.72 V	235	82.7	6.4
3	12690.00	46.9 PK	74.0	-27.1	1.75 V	272	32.0	14.9
4	12690.00	36.2 AV	54.0	-17.8	1.75 V	272	21.3	14.9
5	19035.00	49.9 PK	74.0	-24.1	2.65 V	181	54.8	-4.9
6	19035.00	38.8 AV	54.0	-15.2	2.65 V	181	43.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

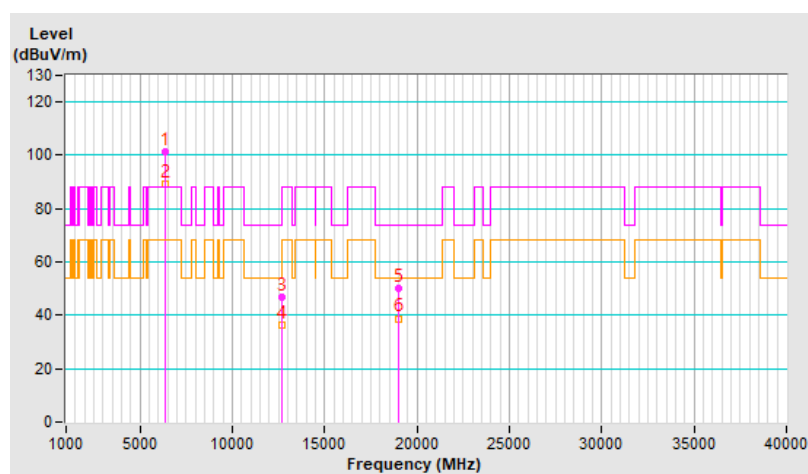


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	89.2 PK			1.06 H	217	82.0	7.2
2	*6505.00	78.7 AV			1.06 H	217	71.5	7.2
3	#13010.00	46.6 PK	88.2	-41.6	1.78 H	283	31.7	14.9
4	#13010.00	36.3 AV	68.2	-31.9	1.78 H	283	21.4	14.9
5	19515.00	49.4 PK	74.0	-24.6	2.67 H	168	54.1	-4.7
6	19515.00	38.3 AV	54.0	-15.7	2.67 H	168	43.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

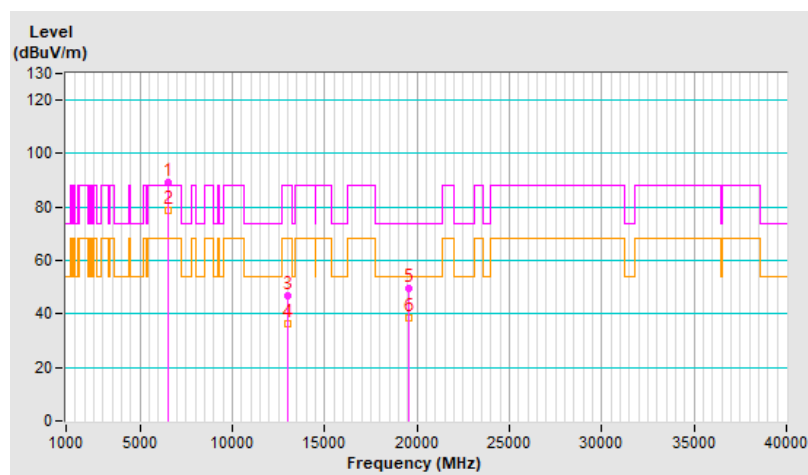


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.5 PK			1.76 V	255	93.3	7.2
2	*6505.00	88.6 AV			1.76 V	255	81.4	7.2
3	#13010.00	46.3 PK	88.2	-41.9	1.76 V	277	31.4	14.9
4	#13010.00	35.9 AV	68.2	-32.3	1.76 V	277	21.0	14.9
5	19515.00	50.0 PK	74.0	-24.0	2.65 V	183	54.7	-4.7
6	19515.00	38.5 AV	54.0	-15.5	2.65 V	183	43.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

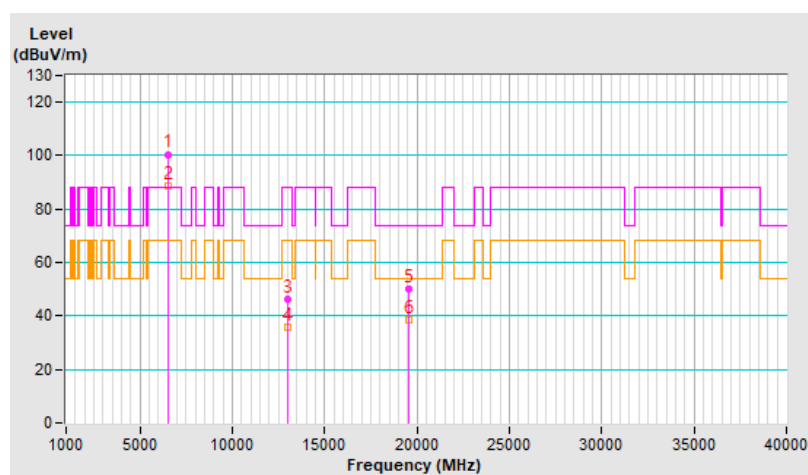


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	88.3 PK			1.00 H	223	80.3	8.0
2	*6825.00	77.9 AV			1.00 H	223	69.9	8.0
3	#13650.00	46.3 PK	88.2	-41.9	1.70 H	287	30.2	16.1
4	#13650.00	36.0 AV	68.2	-32.2	1.70 H	287	19.9	16.1
5	20475.00	49.9 PK	74.0	-24.1	2.67 H	182	53.5	-3.6
6	20475.00	38.7 AV	54.0	-15.3	2.67 H	182	42.3	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

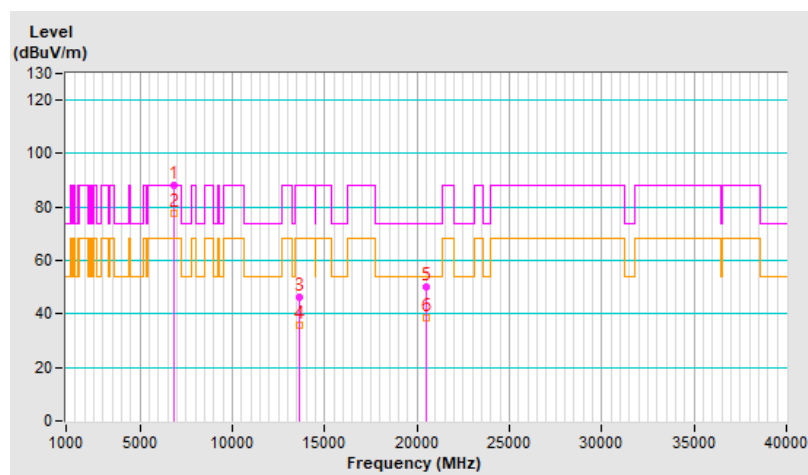


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	101.5 PK			1.75 V	256	93.5	8.0
2	*6825.00	89.1 AV			1.75 V	256	81.1	8.0
3	#13650.00	46.4 PK	88.2	-41.8	1.76 V	267	30.3	16.1
4	#13650.00	35.9 AV	68.2	-32.3	1.76 V	267	19.8	16.1
5	20475.00	50.0 PK	74.0	-24.0	2.68 V	156	53.6	-3.6
6	20475.00	38.6 AV	54.0	-15.4	2.68 V	156	42.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

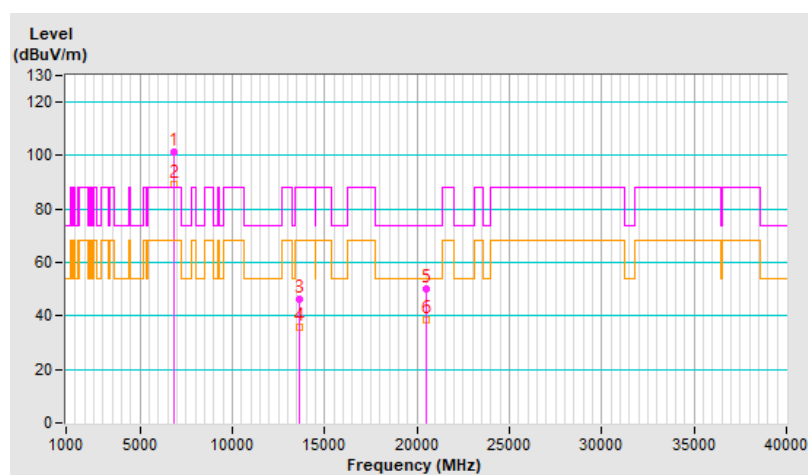


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	89.9 PK			3.67 H	224	81.0	8.9
2	*6985.00	78.7 AV			3.67 H	224	69.8	8.9
3	#7125.00	58.4 PK	88.2	-29.8	3.67 H	224	48.3	10.1
4	#7125.00	46.2 AV	68.2	-22.0	3.67 H	224	36.1	10.1
5	#13970.00	50.0 PK	88.2	-38.2	2.72 H	211	32.7	17.3
6	#13970.00	38.3 AV	68.2	-29.9	2.72 H	211	21.0	17.3
7	20955.00	49.9 PK	74.0	-24.1	2.71 H	159	53.3	-3.4
8	20955.00	38.3 AV	54.0	-15.7	2.71 H	159	41.7	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

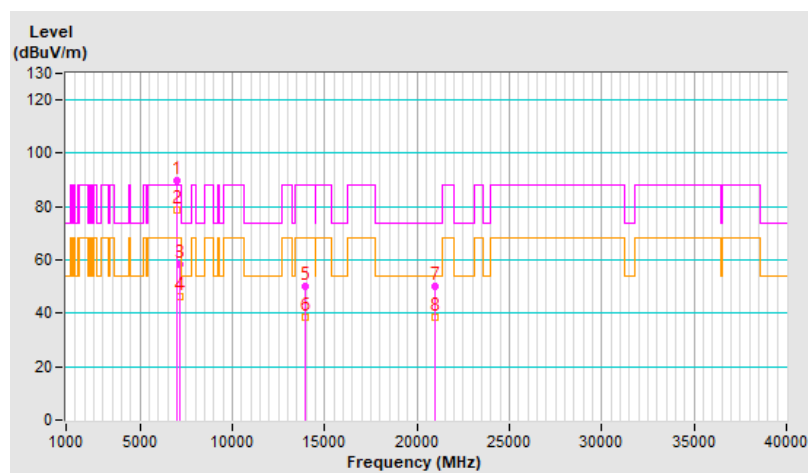


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	*6985.00	102.6 PK			1.97 V	284	93.7	8.9
2	*6985.00	91.3 AV			1.97 V	284	82.4	8.9
3	#7125.00	65.2 PK	88.2	-23.0	1.97 V	284	55.1	10.1
4	#7125.00	57.3 AV	68.2	-10.9	1.97 V	284	47.2	10.1
5	#13970.00	49.7 PK	88.2	-38.5	2.81 V	187	32.4	17.3
6	#13970.00	38.0 AV	68.2	-30.2	2.81 V	187	20.7	17.3
7	20955.00	49.5 PK	74.0	-24.5	2.69 V	153	52.9	-3.4
8	20955.00	37.7 AV	54.0	-16.3	2.69 V	153	41.1	-3.4

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

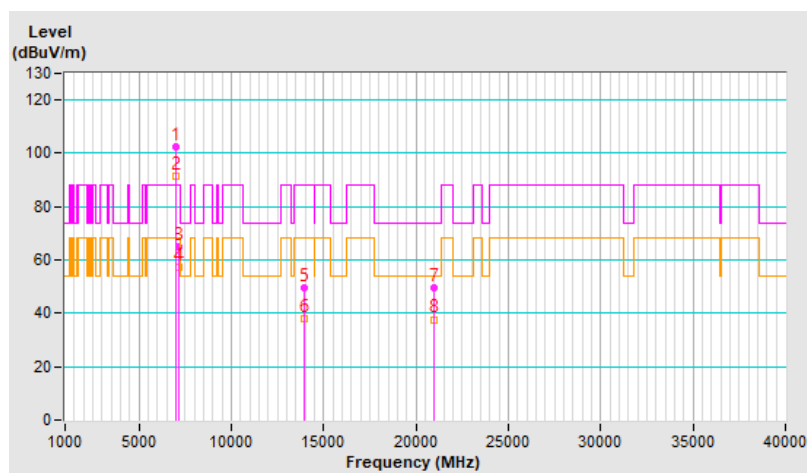


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.1 PK	88.2	-30.1	1.08 H	222	52.5	5.6
2	#5925.00	42.8 AV	68.2	-25.4	1.08 H	222	37.2	5.6
3	*6025.00	88.4 PK			1.08 H	222	82.8	5.6
4	*6025.00	77.6 AV			1.08 H	222	72.0	5.6
5	12050.00	47.0 PK	74.0	-27.0	1.78 H	287	32.4	14.6
6	12050.00	36.6 AV	54.0	-17.4	1.78 H	287	22.0	14.6
7	18075.00	49.9 PK	74.0	-24.1	2.69 H	184	55.2	-5.3
8	18075.00	38.7 AV	54.0	-15.3	2.69 H	184	44.0	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

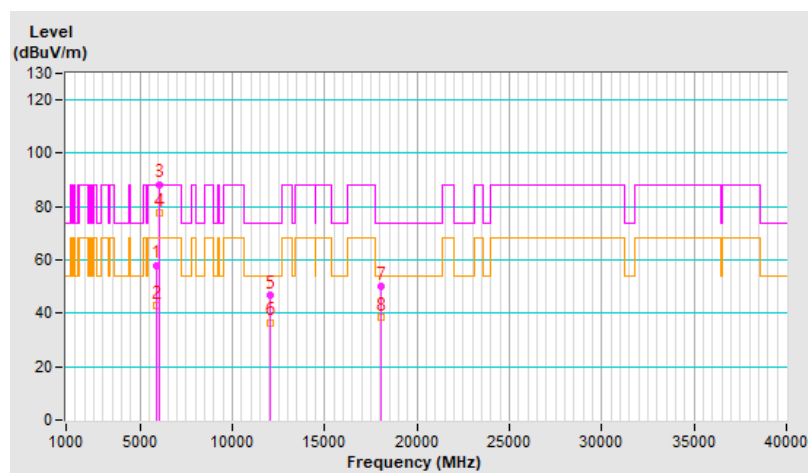


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.9 PK	88.2	-18.3	1.05 V	81	64.3	5.6
2	#5925.00	55.6 AV	68.2	-12.6	1.05 V	81	50.0	5.6
3	*6025.00	101.3 PK			1.05 V	81	95.7	5.6
4	*6025.00	90.0 AV			1.05 V	81	84.4	5.6
5	12050.00	47.4 PK	74.0	-26.6	1.72 V	273	32.8	14.6
6	12050.00	36.6 AV	54.0	-17.4	1.72 V	273	22.0	14.6
7	18075.00	49.2 PK	74.0	-24.8	2.72 V	183	54.5	-5.3
8	18075.00	38.0 AV	54.0	-16.0	2.72 V	183	43.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

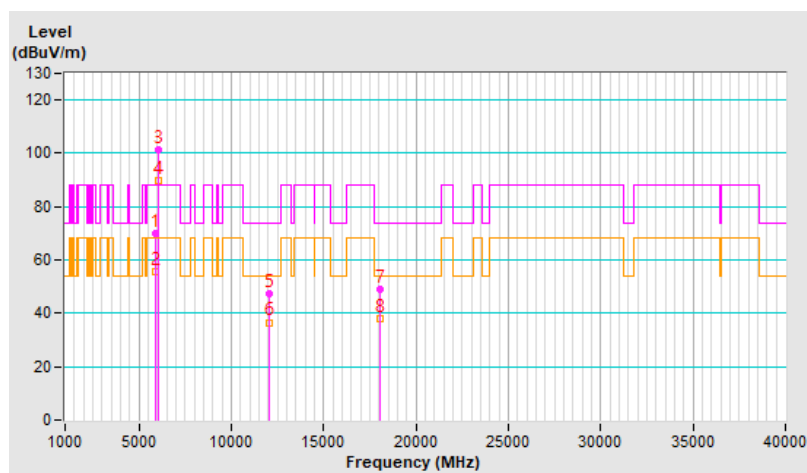


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	88.4 PK			1.07 H	215	82.6	5.8
2	*6185.00	77.6 AV			1.07 H	215	71.8	5.8
3	12370.00	46.6 PK	74.0	-27.4	1.79 H	260	31.9	14.7
4	12370.00	36.1 AV	54.0	-17.9	1.79 H	260	21.4	14.7
5	18555.00	49.4 PK	74.0	-24.6	2.60 H	168	54.8	-5.4
6	18555.00	38.2 AV	54.0	-15.8	2.60 H	168	43.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

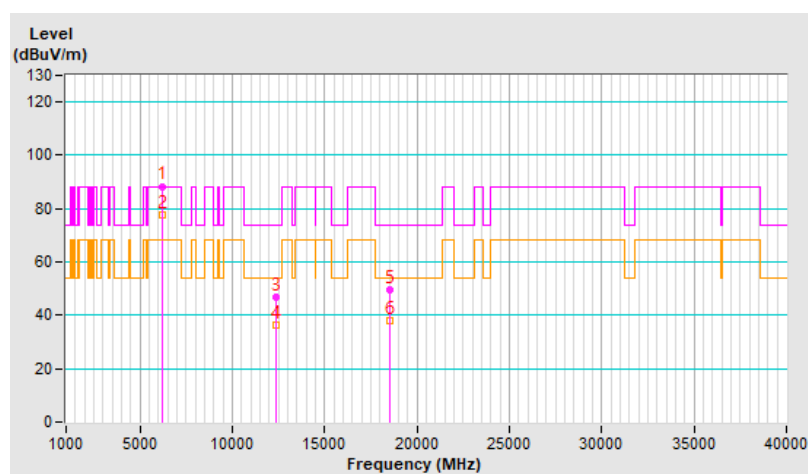


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	101.3 PK			1.04 V	82	95.5	5.8
2	*6185.00	89.8 AV			1.04 V	82	84.0	5.8
3	12370.00	46.8 PK	74.0	-27.2	1.77 V	266	32.1	14.7
4	12370.00	36.3 AV	54.0	-17.7	1.77 V	266	21.6	14.7
5	18555.00	49.9 PK	74.0	-24.1	2.70 V	167	55.3	-5.4
6	18555.00	38.5 AV	54.0	-15.5	2.70 V	167	43.9	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

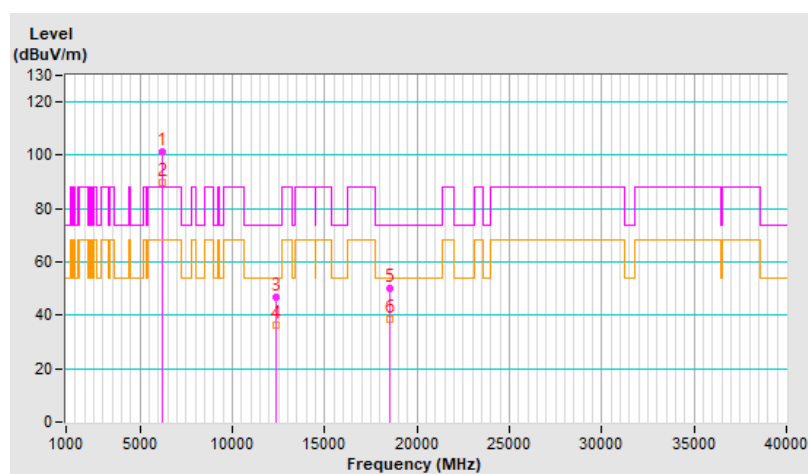


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	88.7 PK			1.12 H	211	82.3	6.4
2	*6345.00	77.8 AV			1.12 H	211	71.4	6.4
3	12690.00	46.0 PK	74.0	-28.0	1.73 H	269	31.1	14.9
4	12690.00	35.8 AV	54.0	-18.2	1.73 H	269	20.9	14.9
5	19035.00	49.7 PK	74.0	-24.3	2.61 H	158	54.6	-4.9
6	19035.00	38.8 AV	54.0	-15.2	2.61 H	158	43.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

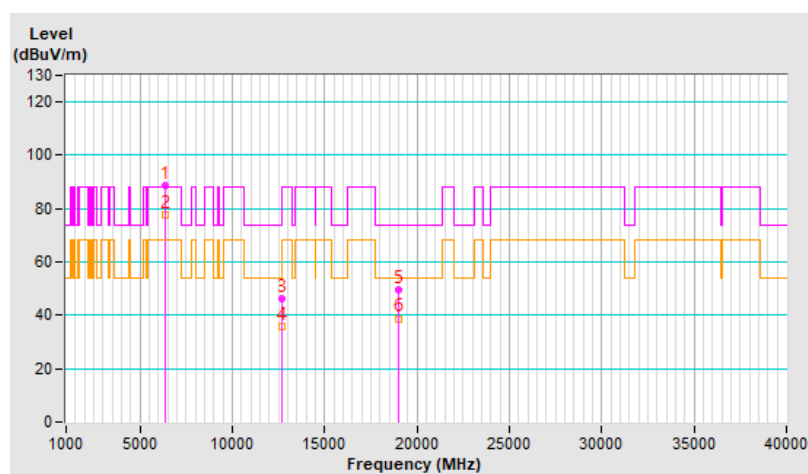


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	101.4 PK			1.05 V	88	95.0	6.4
2	*6345.00	89.9 AV			1.05 V	88	83.5	6.4
3	12690.00	46.4 PK	74.0	-27.6	1.79 V	260	31.5	14.9
4	12690.00	36.1 AV	54.0	-17.9	1.79 V	260	21.2	14.9
5	19035.00	50.4 PK	74.0	-23.6	2.70 V	164	55.3	-4.9
6	19035.00	39.0 AV	54.0	-15.0	2.70 V	164	43.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

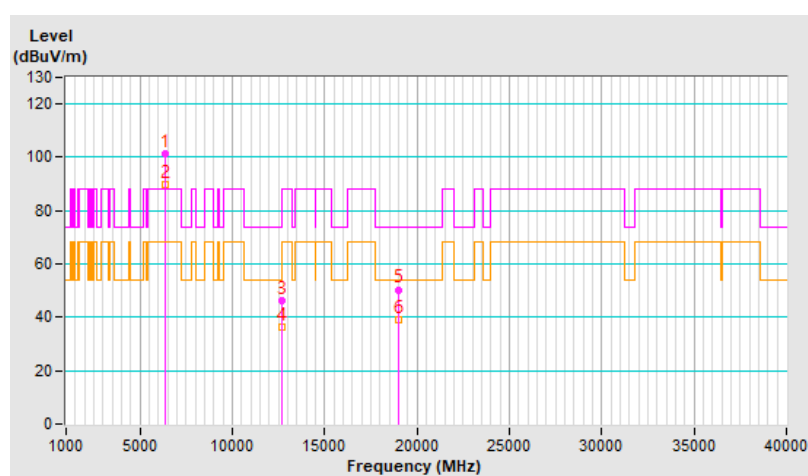


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	88.4 PK			1.11 H	220	81.2	7.2
2	*6505.00	77.5 AV			1.11 H	220	70.3	7.2
3	#13010.00	46.9 PK	88.2	-41.3	1.72 H	286	32.0	14.9
4	#13010.00	36.6 AV	68.2	-31.6	1.72 H	286	21.7	14.9
5	19515.00	49.9 PK	74.0	-24.1	2.60 H	161	54.6	-4.7
6	19515.00	38.4 AV	54.0	-15.6	2.60 H	161	43.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

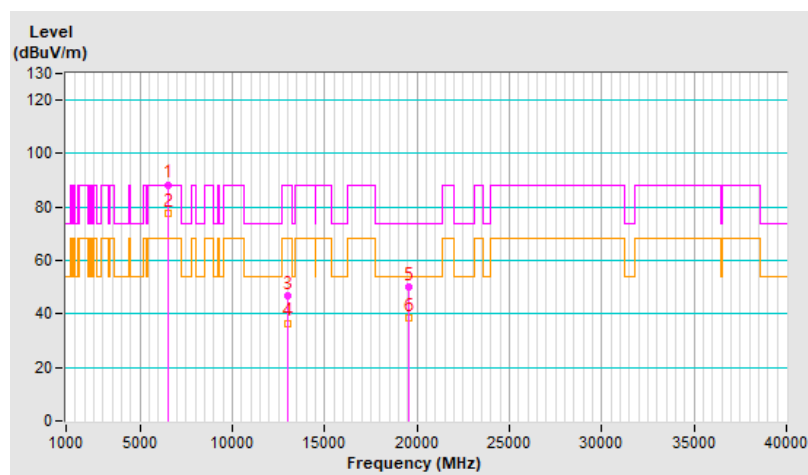


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	101.9 PK			1.06 V	69	94.7	7.2
2	*6505.00	90.4 AV			1.06 V	69	83.2	7.2
3	#13010.00	49.8 PK	88.2	-38.4	2.77 V	200	34.9	14.9
4	#13010.00	38.1 AV	68.2	-30.1	2.77 V	200	23.2	14.9
5	19515.00	49.6 PK	74.0	-24.4	2.73 V	157	54.3	-4.7
6	19515.00	38.1 AV	54.0	-15.9	2.73 V	157	42.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

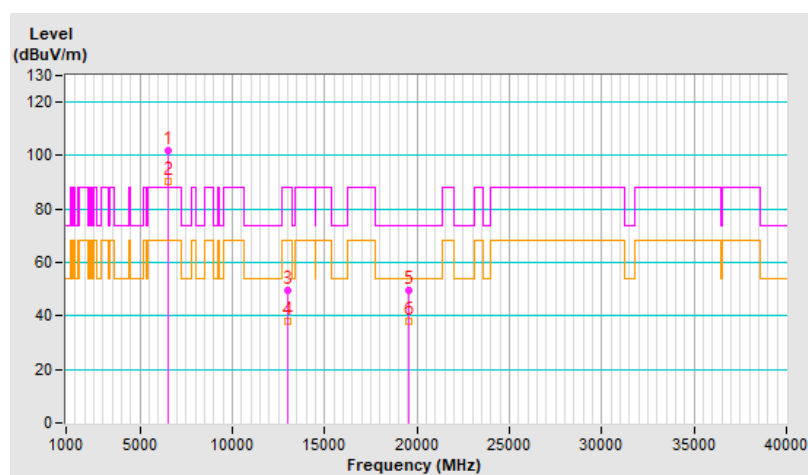


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	89.0 PK			1.04 H	219	81.0	8.0
2	*6825.00	77.9 AV			1.04 H	219	69.9	8.0
3	#13650.00	47.2 PK	88.2	-41.0	1.76 H	266	31.1	16.1
4	#13650.00	36.5 AV	68.2	-31.7	1.76 H	266	20.4	16.1
5	20475.00	49.2 PK	74.0	-24.8	2.71 H	180	52.8	-3.6
6	20475.00	38.1 AV	54.0	-15.9	2.71 H	180	41.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

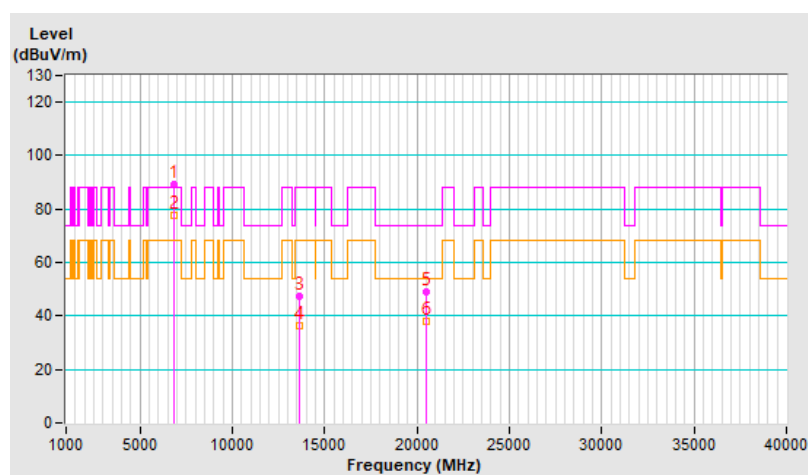


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	101.4 PK			1.01 V	90	93.4	8.0
2	*6825.00	89.8 AV			1.01 V	90	81.8	8.0
3	#13650.00	46.8 PK	88.2	-41.4	1.69 V	262	30.7	16.1
4	#13650.00	36.4 AV	68.2	-31.8	1.69 V	262	20.3	16.1
5	20475.00	49.6 PK	74.0	-24.4	2.62 V	172	53.2	-3.6
6	20475.00	38.1 AV	54.0	-15.9	2.62 V	172	41.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

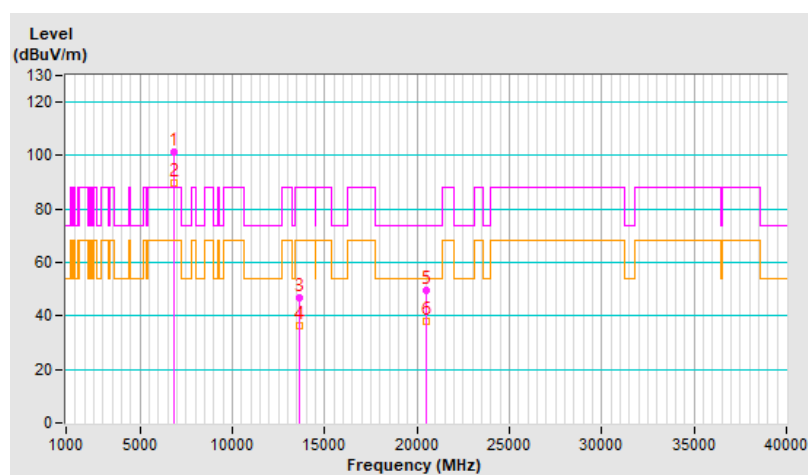


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	92.4 PK			1.00 H	224	83.5	8.9
2	*6985.00	81.0 AV			1.00 H	224	72.1	8.9
3	#7125.00	58.4 PK	88.2	-29.8	1.00 H	224	48.3	10.1
4	#7125.00	46.3 AV	68.2	-21.9	1.00 H	224	36.2	10.1
5	#13970.00	49.6 PK	88.2	-38.6	2.74 H	209	32.3	17.3
6	#13970.00	37.8 AV	68.2	-30.4	2.74 H	209	20.5	17.3
7	20955.00	50.0 PK	74.0	-24.0	2.75 H	152	53.4	-3.4
8	20955.00	38.5 AV	54.0	-15.5	2.75 H	152	41.9	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

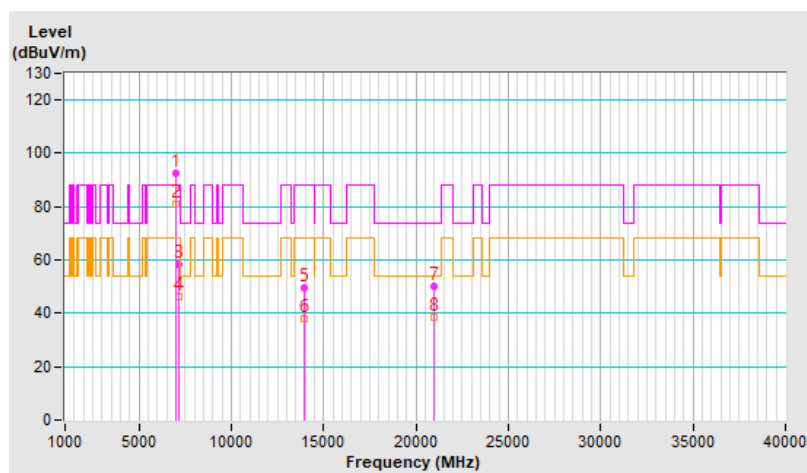


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 73 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.4 PK			1.00 V	81	93.5	8.9
2	*6985.00	91.4 AV			1.00 V	81	82.5	8.9
3	#7125.00	69.1 PK	88.2	-19.1	1.00 V	81	59.0	10.1
4	#7125.00	52.3 AV	68.2	-15.9	1.00 V	81	42.2	10.1
5	#13970.00	49.7 PK	88.2	-38.5	2.83 V	202	32.4	17.3
6	#13970.00	38.1 AV	68.2	-30.1	2.83 V	202	20.8	17.3
7	20955.00	49.6 PK	74.0	-24.4	2.69 V	142	53.0	-3.4
8	20955.00	38.1 AV	54.0	-15.9	2.69 V	142	41.5	-3.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

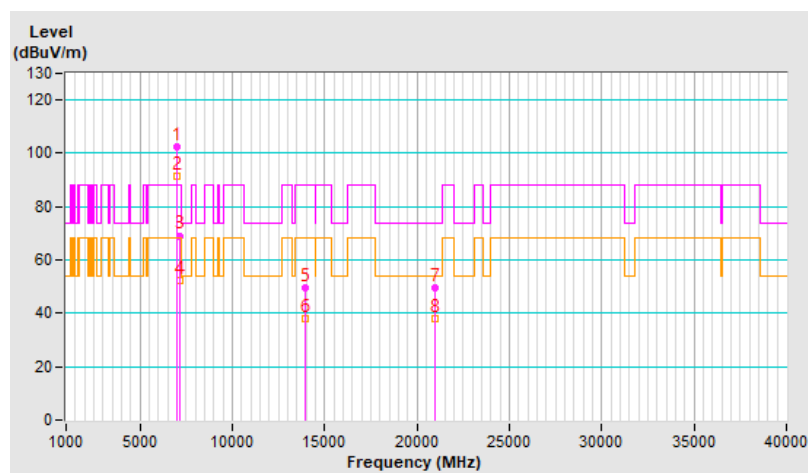


Plot of Band Edge


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 1

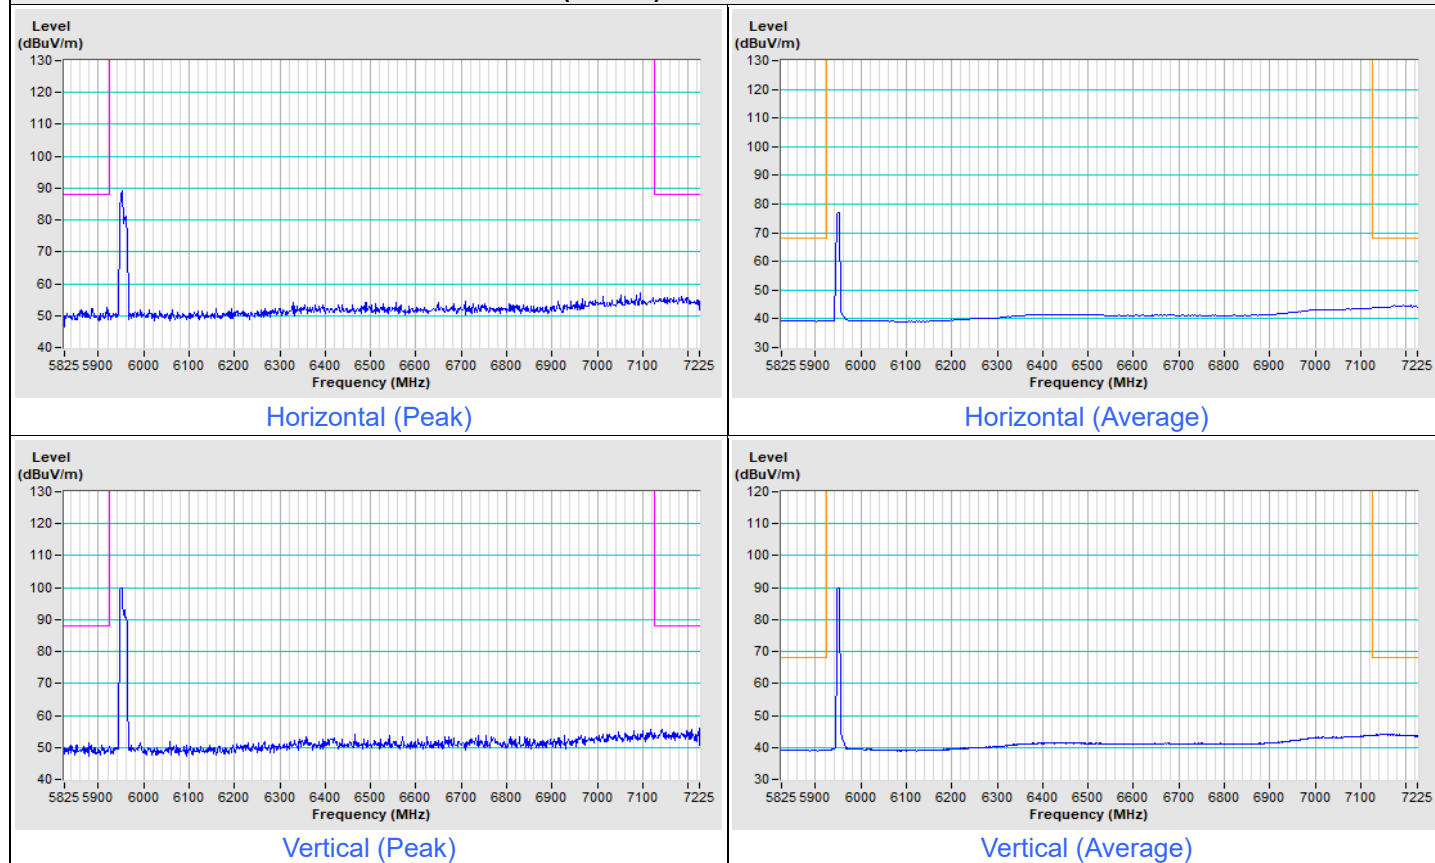


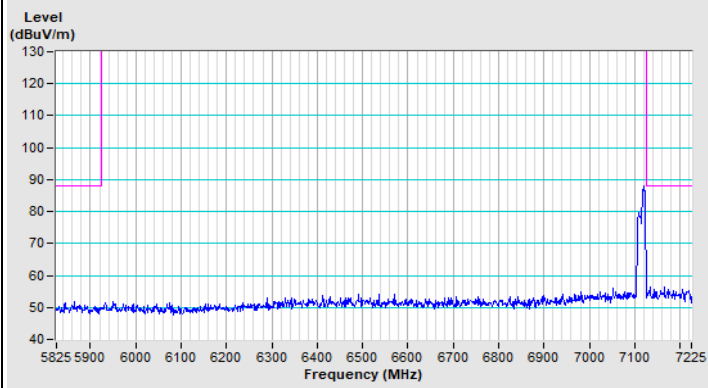802.11be (EHT20) 52+26-tone MRU Channel 233


Horizontal (Peak)

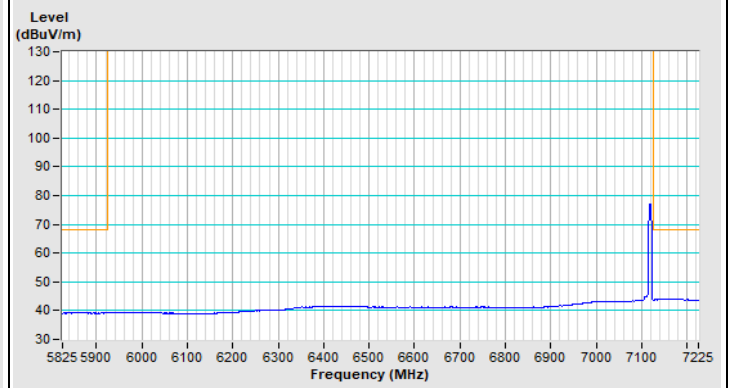

Horizontal (Average)

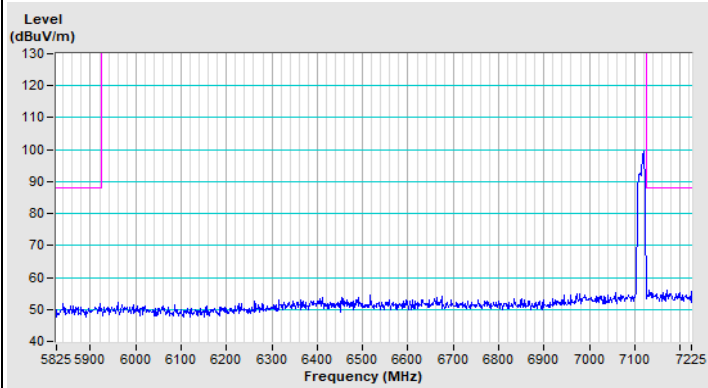


Vertical (Peak)

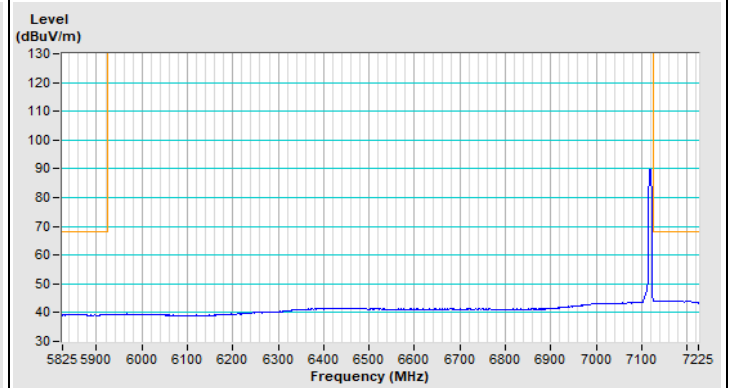


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

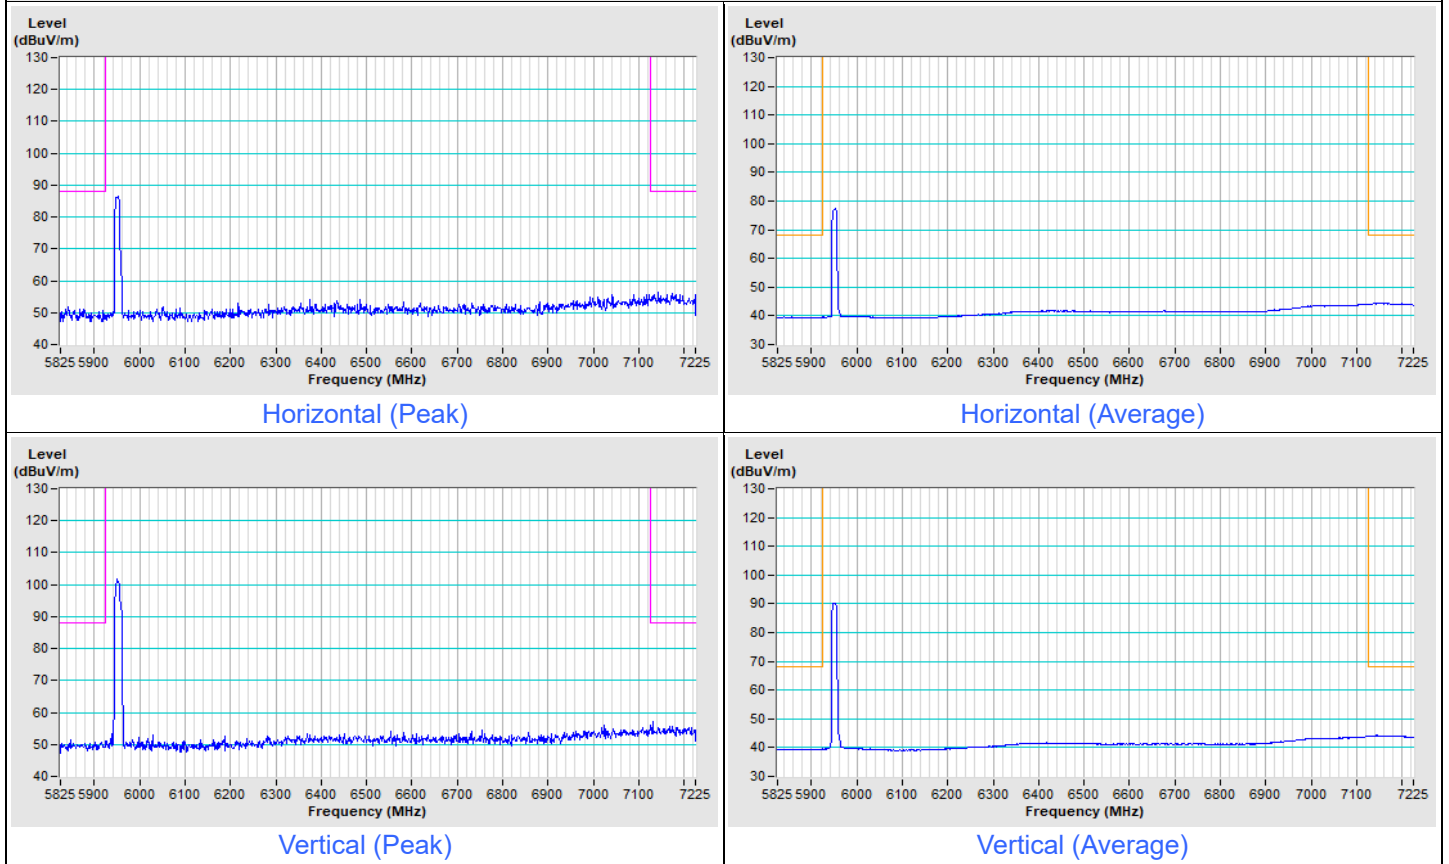


802.11be (EHT20) 106+26-tone MRU Channel 233

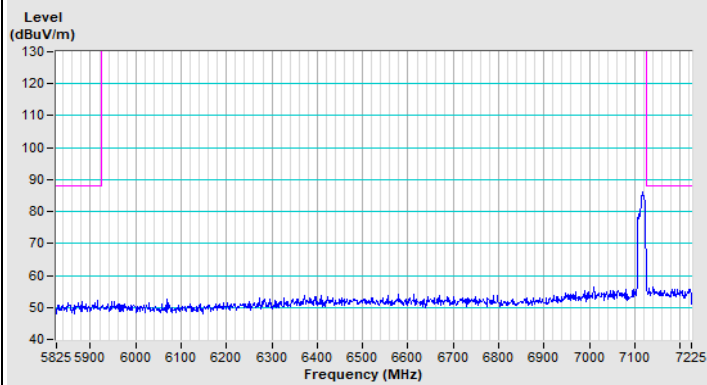


Horizontal (Peak)

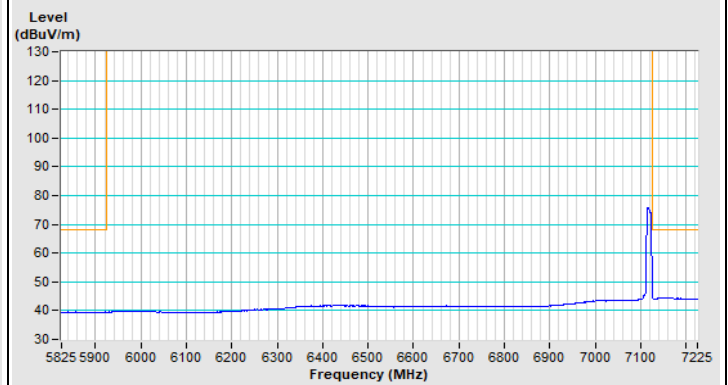

Horizontal (Average)

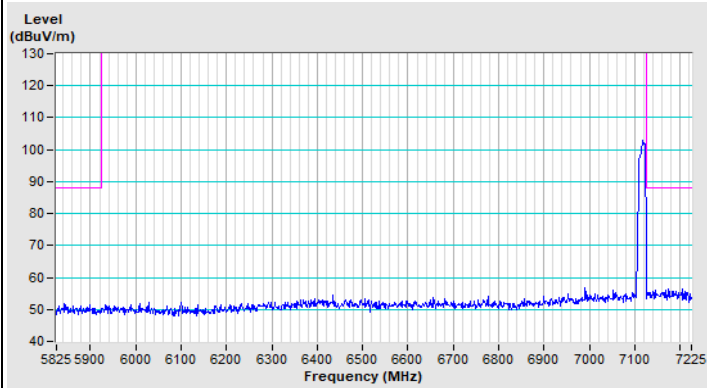


Vertical (Peak)

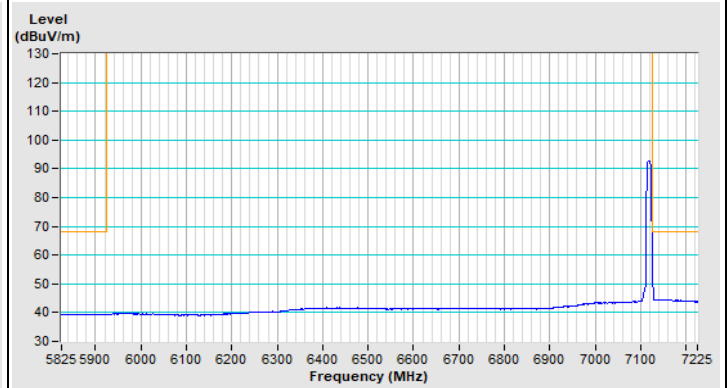


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

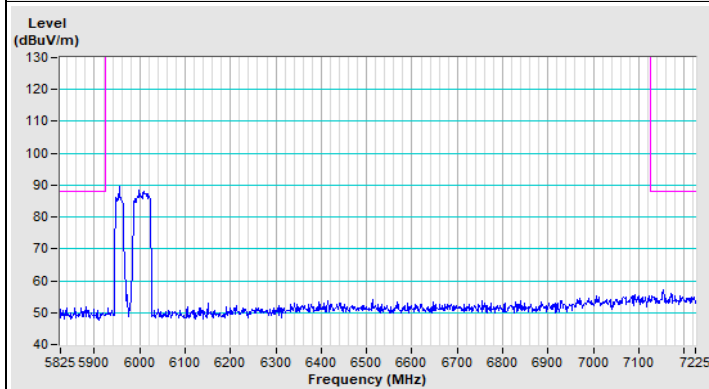


Horizontal (Peak)

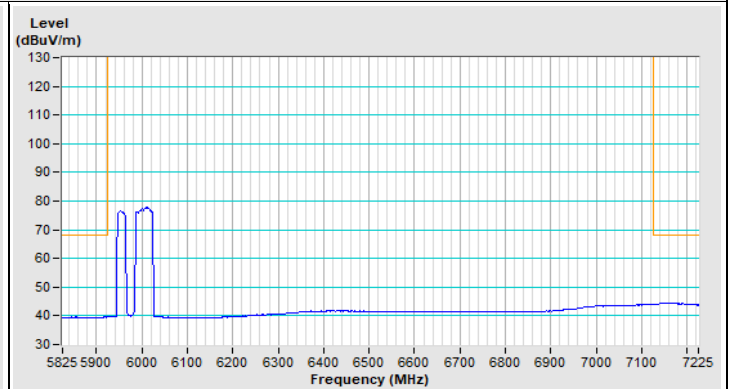

Horizontal (Average)

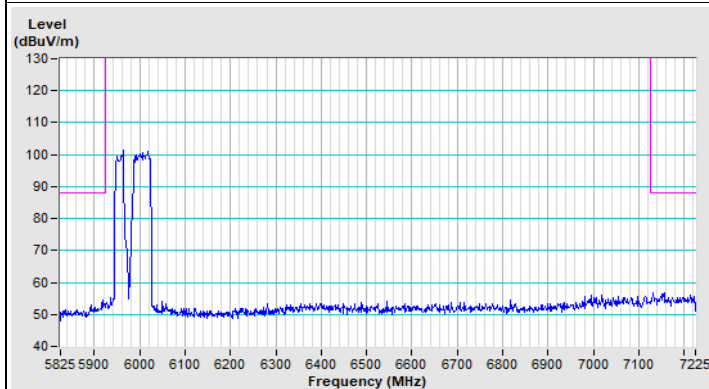


Vertical (Peak)

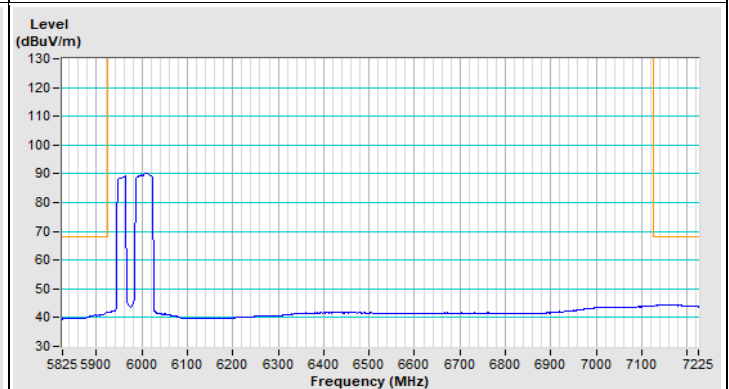


Vertical (Average)


802.11be (EHT80) 484+242-tone MRU Channel 215

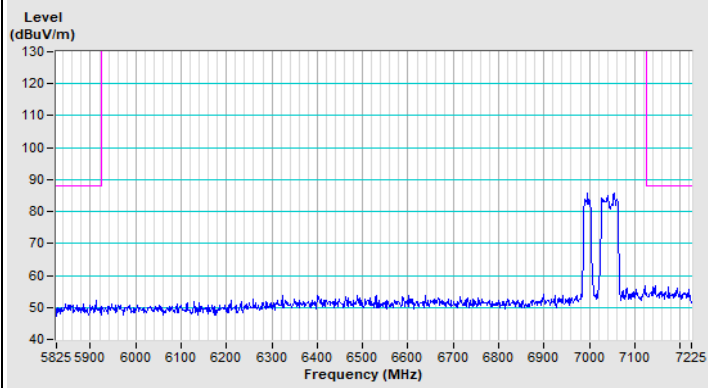


Horizontal (Peak)

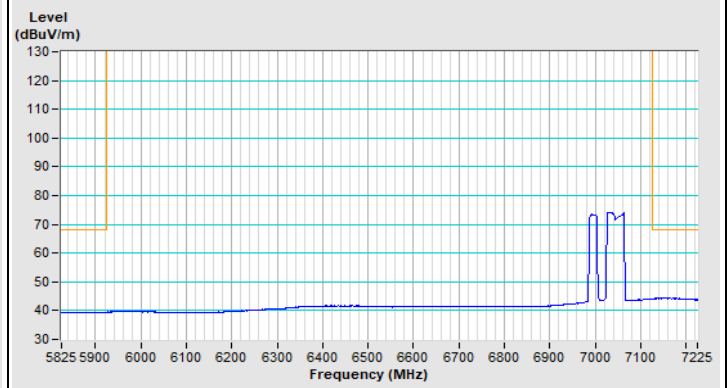

Horizontal (Average)

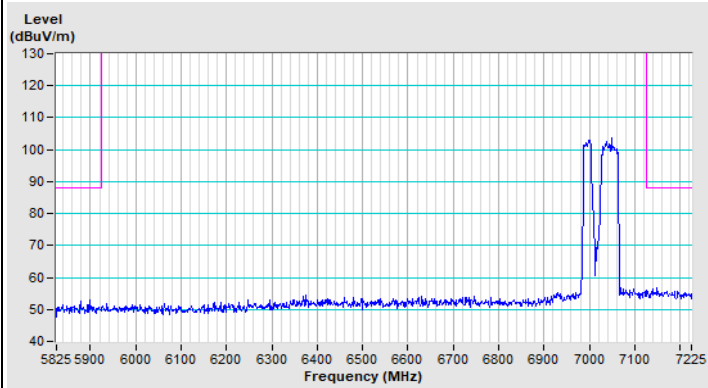


Vertical (Peak)

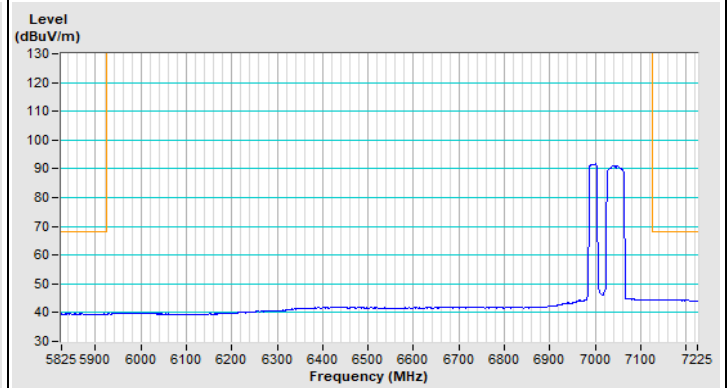


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

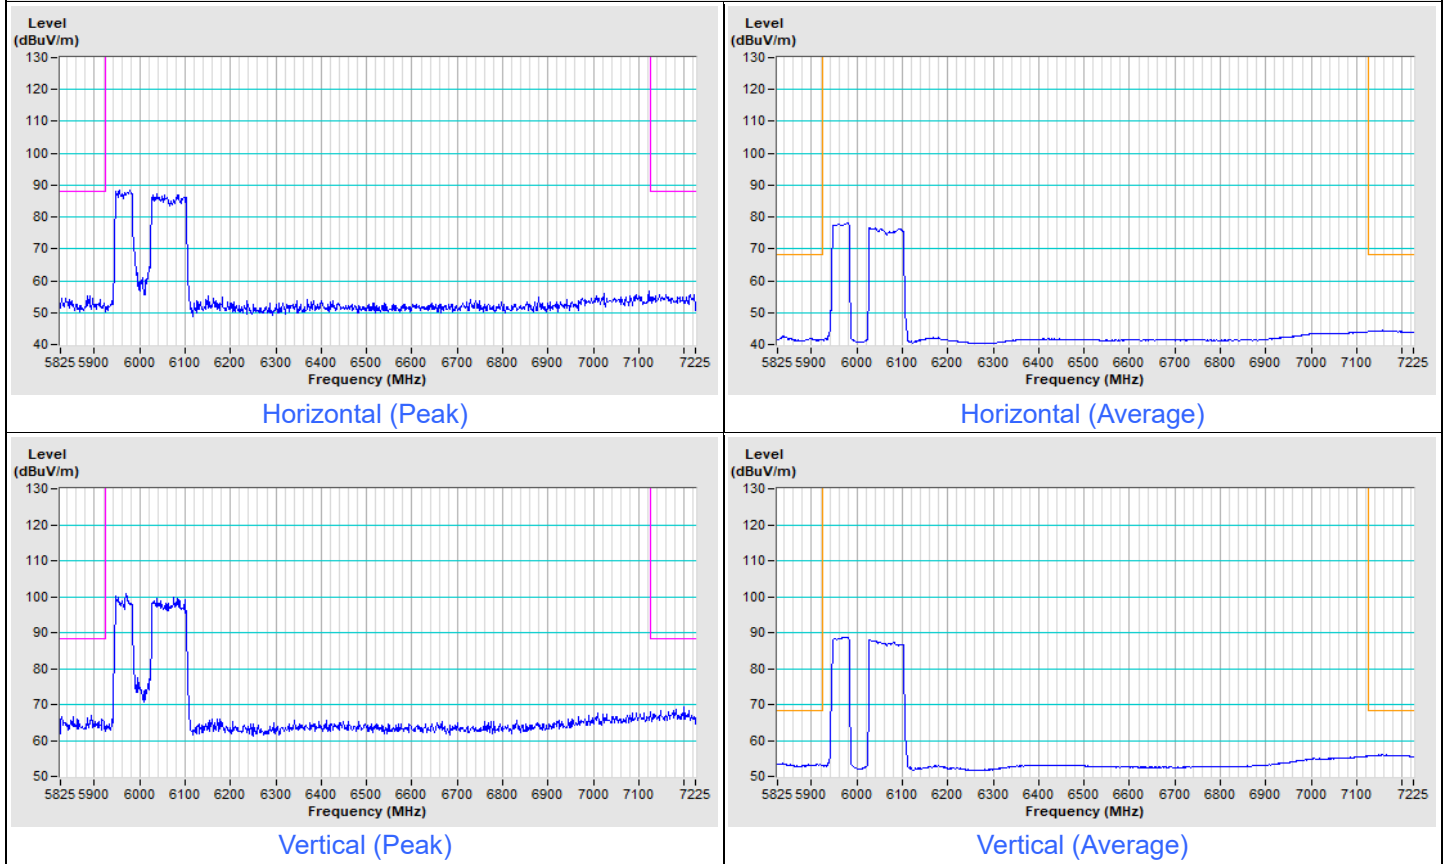


802.11be (EHT160) 996+484-tone MRU Channel 207

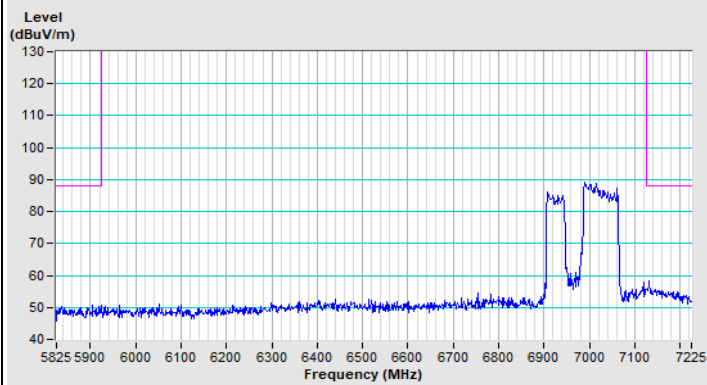


Horizontal (Peak)

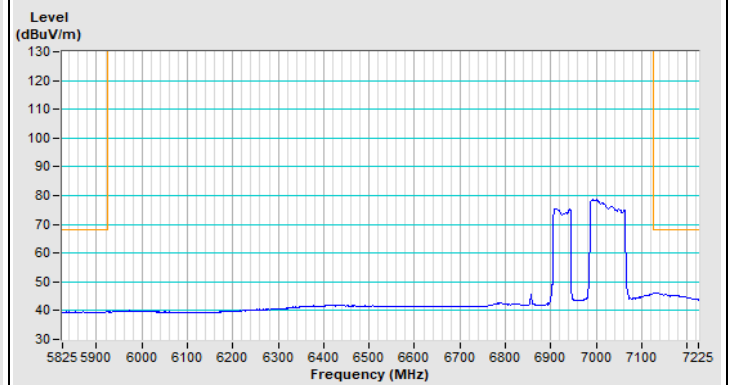

Horizontal (Average)

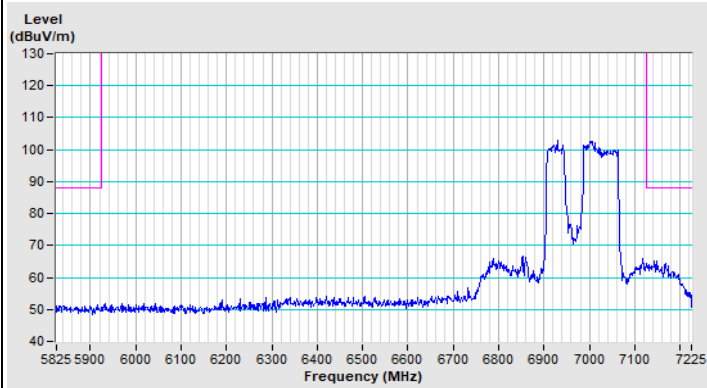


Vertical (Peak)

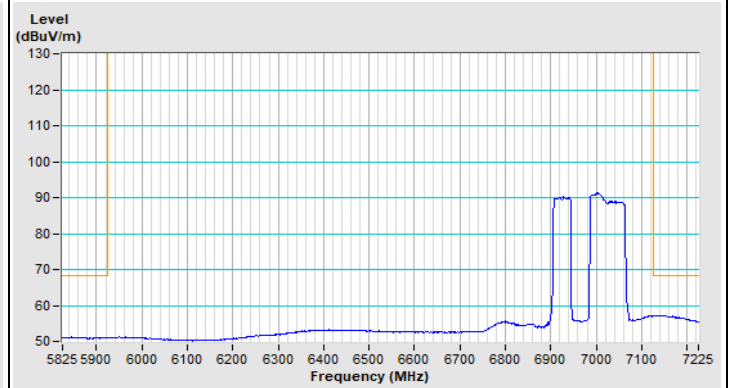


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

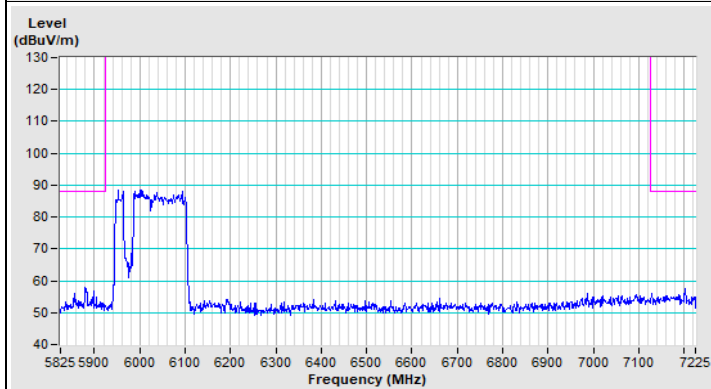


Horizontal (Peak)

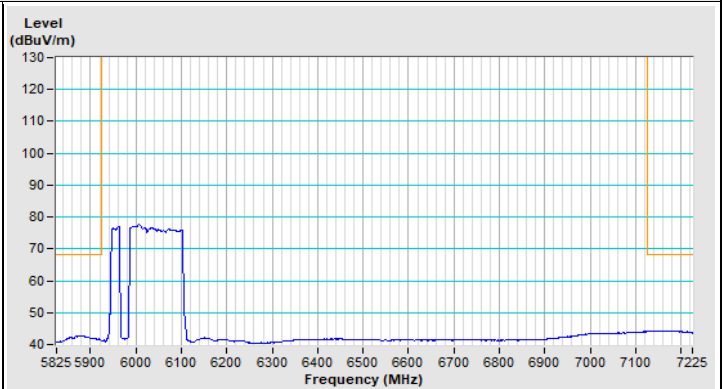


Horizontal (Average)

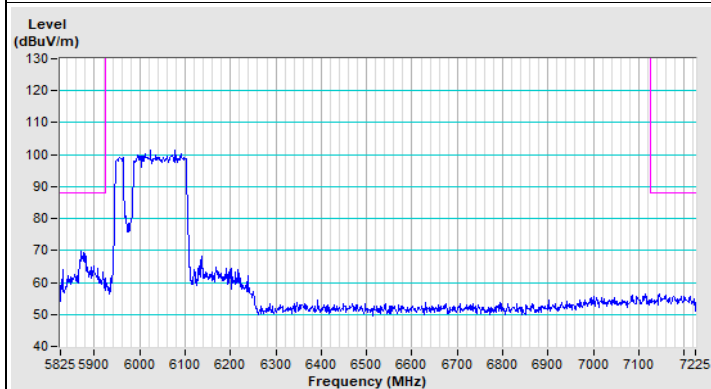


Vertical (Peak)

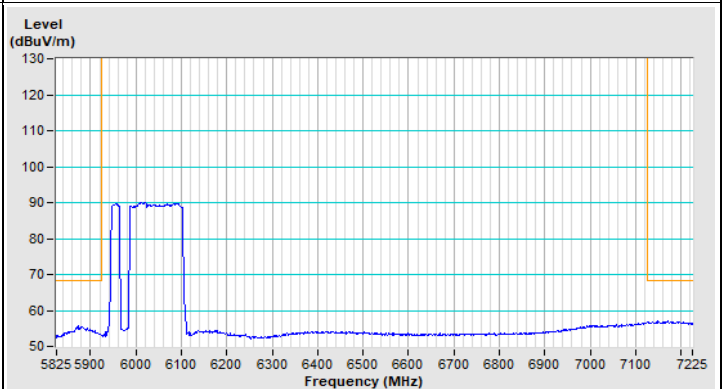


Vertical (Average)

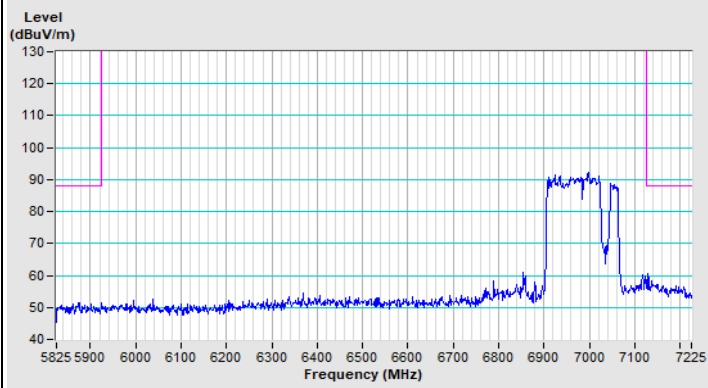802.11be (EHT160) 996+484+242-tone MRU Channel 207


Horizontal (Peak)

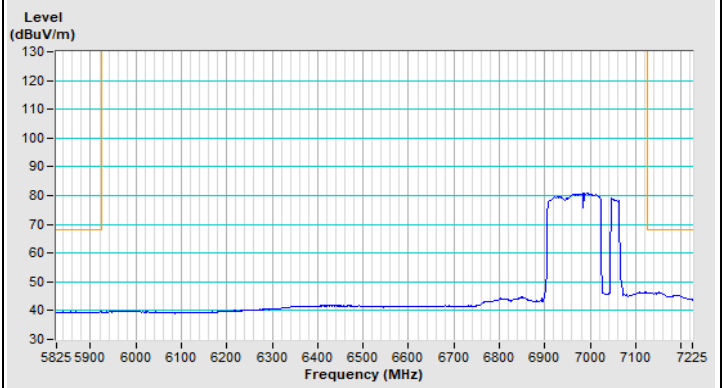

Horizontal (Average)

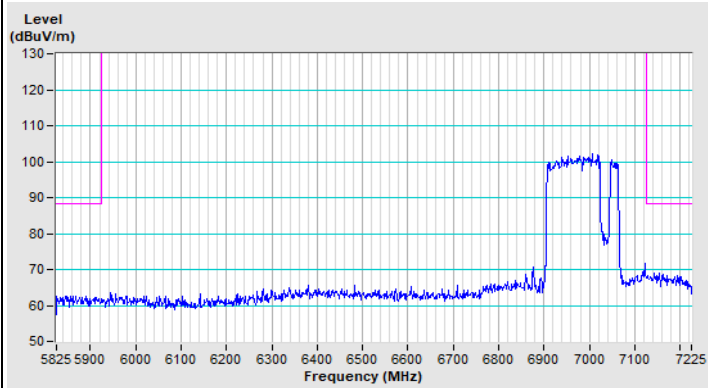

Vertical (Peak)

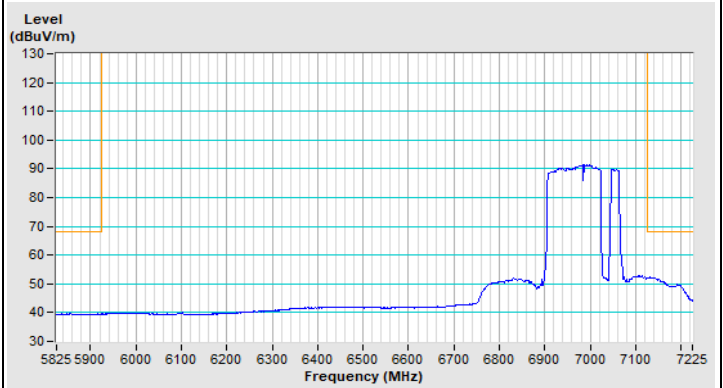

Vertical (Average)


Mode C_2TX

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	1.20 H	263	45.9	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.20 H	263	33.8	5.6
3	*5955.00	87.5 PK			1.20 H	263	82.0	5.5
4	*5955.00	78.0 AV			1.20 H	263	72.5	5.5
5	11910.00	46.3 PK	74.0	-27.7	1.72 H	2	31.7	14.6
6	11910.00	34.2 AV	54.0	-19.8	1.72 H	2	19.6	14.6
7	17865.00	57.3 PK	74.0	-16.7	1.77 H	35	31.4	25.9
8	17865.00	44.8 AV	54.0	-9.2	1.77 H	35	18.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

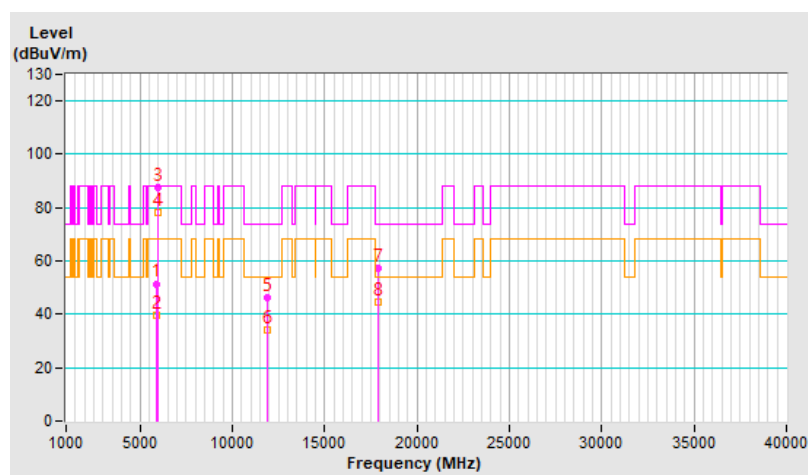


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.8 PK	88.2	-37.4	1.50 V	80	45.2	5.6
2	#5925.00	39.3 AV	68.2	-28.9	1.50 V	80	33.7	5.6
3	*5955.00	99.8 PK			1.50 V	80	94.3	5.5
4	*5955.00	88.9 AV			1.50 V	80	83.4	5.5
5	11910.00	46.5 PK	74.0	-27.5	1.66 V	5	31.9	14.6
6	11910.00	34.3 AV	54.0	-19.7	1.66 V	5	19.7	14.6
7	17865.00	57.1 PK	74.0	-16.9	1.76 V	34	31.2	25.9
8	17865.00	44.8 AV	54.0	-9.2	1.76 V	34	18.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

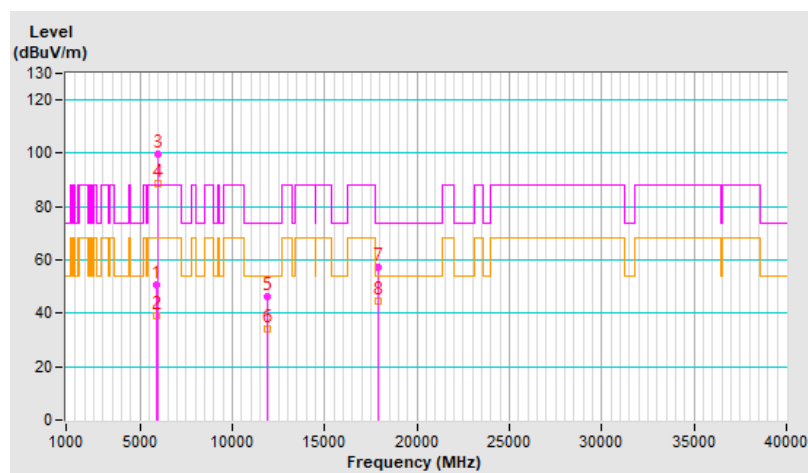


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	87.3 PK			1.40 H	51	80.5	6.8
2	*6415.00	77.2 AV			1.40 H	51	70.4	6.8
3	#12830.00	45.8 PK	88.2	-42.4	1.70 H	6	30.7	15.1
4	#12830.00	33.8 AV	68.2	-34.4	1.70 H	6	18.7	15.1
5	19245.00	57.1 PK	74.0	-16.9	1.73 H	22	61.7	-4.6
6	19245.00	44.9 AV	54.0	-9.1	1.73 H	22	49.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

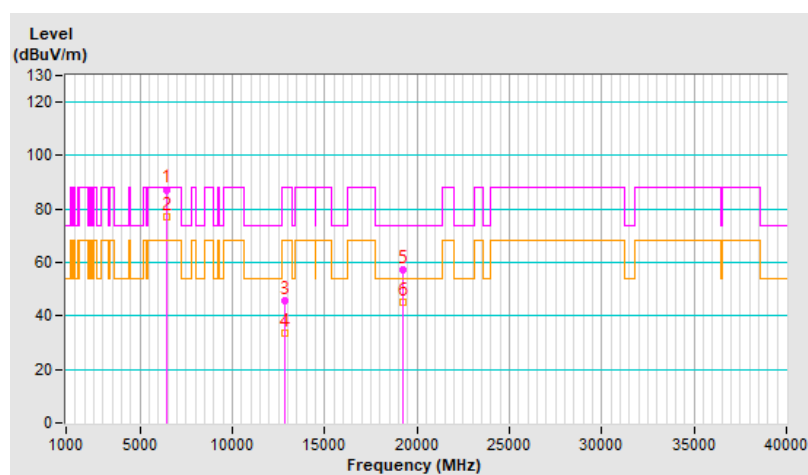


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	100.5 PK			1.52 V	68	93.7	6.8
2	*6415.00	89.3 AV			1.52 V	68	82.5	6.8
3	#12830.00	46.9 PK	88.2	-41.3	1.64 V	20	31.8	15.1
4	#12830.00	34.6 AV	68.2	-33.6	1.64 V	20	19.5	15.1
5	19245.00	57.8 PK	74.0	-16.2	1.74 V	41	62.4	-4.6
6	19245.00	45.3 AV	54.0	-8.7	1.74 V	41	49.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

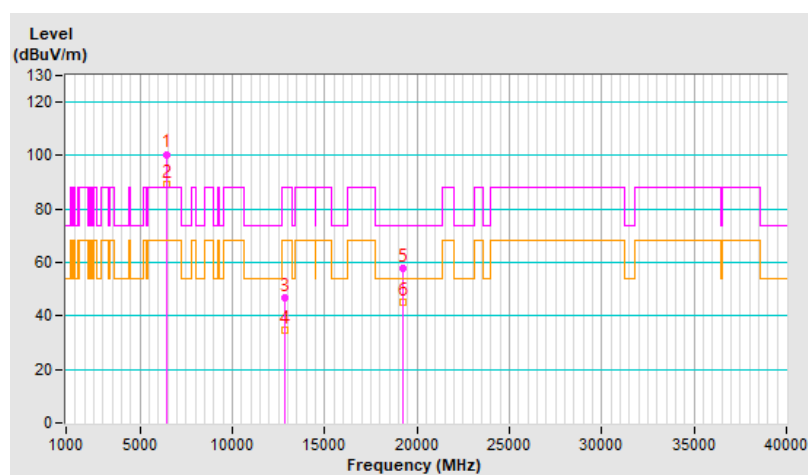


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	87.2 PK			1.45 H	76	80.3	6.9
2	*6435.00	77.2 AV			1.45 H	76	70.3	6.9
3	#12870.00	46.5 PK	88.2	-41.7	1.62 H	0	31.3	15.2
4	#12870.00	34.3 AV	68.2	-33.9	1.62 H	0	19.1	15.2
5	19305.00	56.6 PK	74.0	-17.4	1.76 H	31	61.1	-4.5
6	19305.00	44.4 AV	54.0	-9.6	1.76 H	31	48.9	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

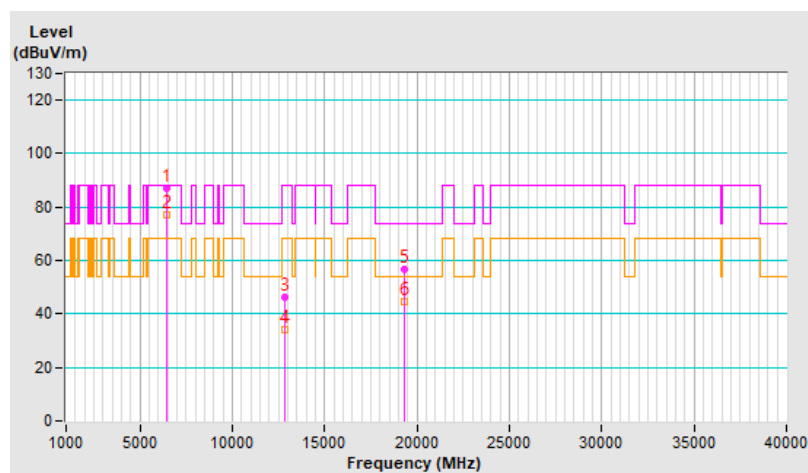


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.7 PK			1.52 V	72	92.8	6.9
2	*6435.00	88.8 AV			1.52 V	72	81.9	6.9
3	#12870.00	46.5 PK	88.2	-41.7	1.62 V	2	31.3	15.2
4	#12870.00	34.4 AV	68.2	-33.8	1.62 V	2	19.2	15.2
5	19305.00	56.7 PK	74.0	-17.3	1.82 V	46	61.2	-4.5
6	19305.00	44.6 AV	54.0	-9.4	1.82 V	46	49.1	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

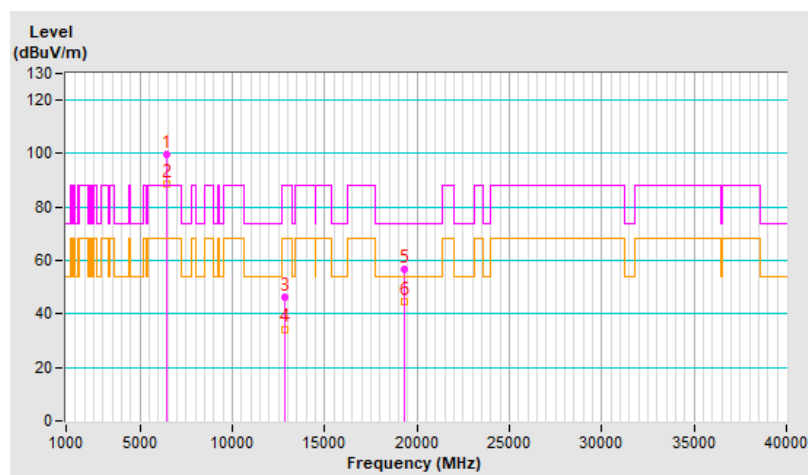


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	87.3 PK			1.38 H	74	80.1	7.2
2	*6515.00	77.0 AV			1.38 H	74	69.8	7.2
3	#13030.00	47.1 PK	88.2	-41.1	1.71 H	14	32.1	15.0
4	#13030.00	34.8 AV	68.2	-33.4	1.71 H	14	19.8	15.0
5	19545.00	57.2 PK	74.0	-16.8	1.76 H	24	62.0	-4.8
6	19545.00	44.9 AV	54.0	-9.1	1.76 H	24	49.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

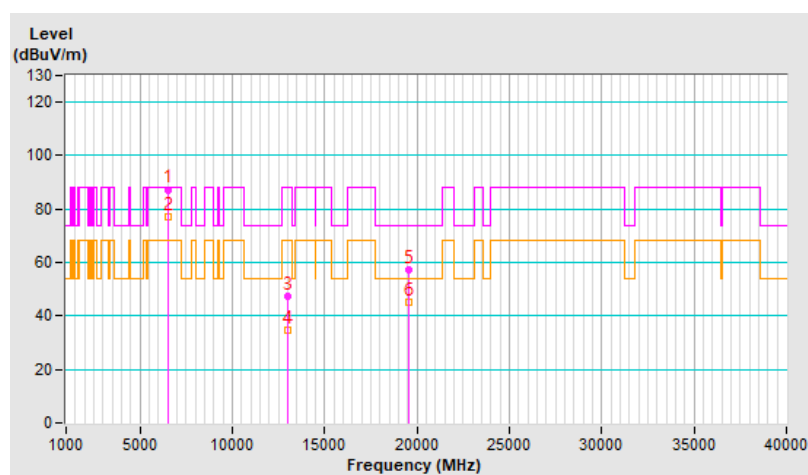


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.0 PK			1.55 V	84	92.8	7.2
2	*6515.00	89.0 AV			1.55 V	84	81.8	7.2
3	#13030.00	46.1 PK	88.2	-42.1	1.67 V	17	31.1	15.0
4	#13030.00	34.2 AV	68.2	-34.0	1.67 V	17	19.2	15.0
5	19545.00	57.4 PK	74.0	-16.6	1.78 V	20	62.2	-4.8
6	19545.00	45.2 AV	54.0	-8.8	1.78 V	20	50.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

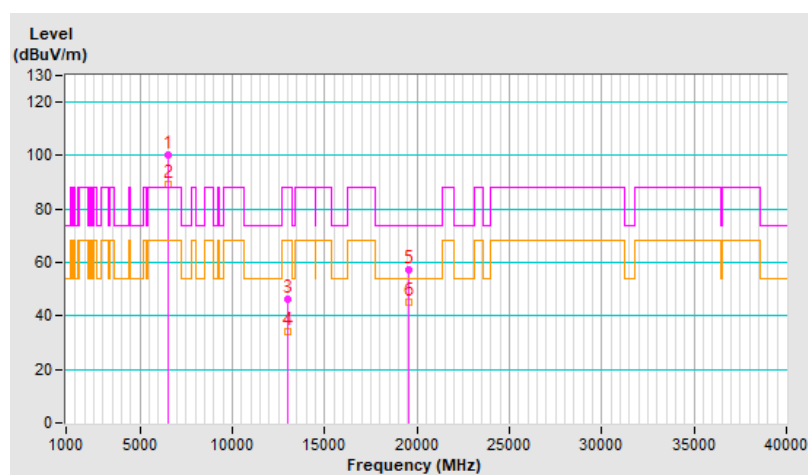


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	87.3 PK			1.45 H	69	79.9	7.4
2	*6535.00	77.2 AV			1.45 H	69	69.8	7.4
3	#13070.00	46.8 PK	88.2	-41.4	1.61 H	20	31.7	15.1
4	#13070.00	34.7 AV	68.2	-33.5	1.61 H	20	19.6	15.1
5	19605.00	57.1 PK	74.0	-16.9	1.81 H	42	61.9	-4.8
6	19605.00	45.0 AV	54.0	-9.0	1.81 H	42	49.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

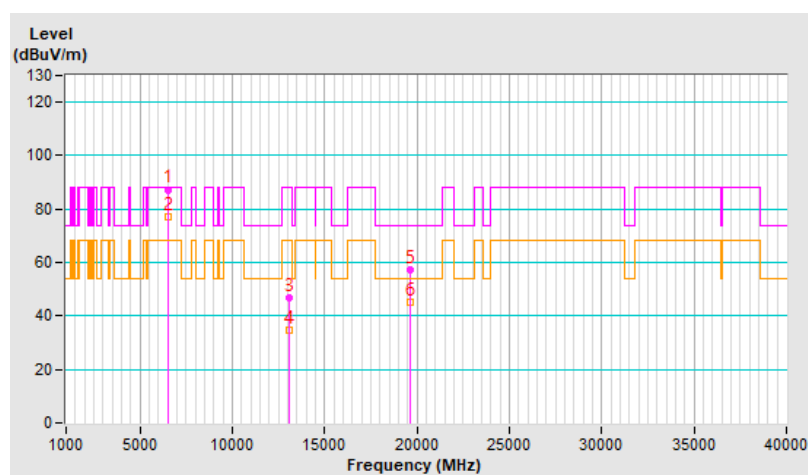


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	100.1 PK			1.55 V	80	92.7	7.4
2	*6535.00	89.2 AV			1.55 V	80	81.8	7.4
3	#13070.00	46.5 PK	88.2	-41.7	1.70 V	8	31.4	15.1
4	#13070.00	34.5 AV	68.2	-33.7	1.70 V	8	19.4	15.1
5	19605.00	57.4 PK	74.0	-16.6	1.79 V	25	62.2	-4.8
6	19605.00	45.2 AV	54.0	-8.8	1.79 V	25	50.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

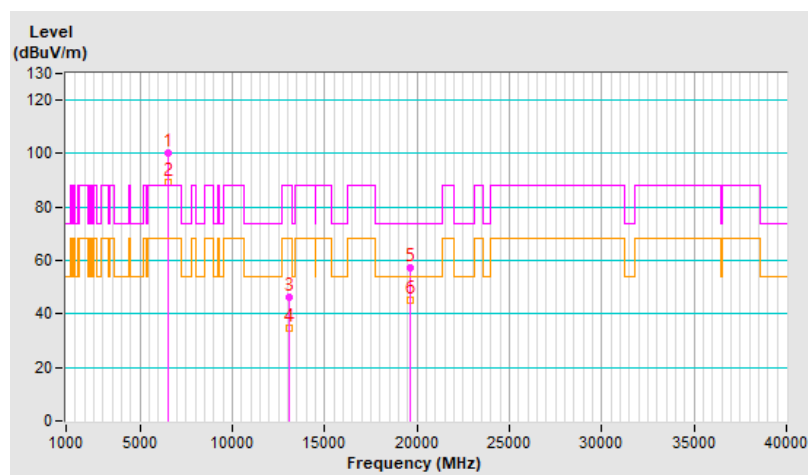


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	86.8 PK			1.45 H	77	78.6	8.2
2	*6855.00	76.5 AV			1.45 H	77	68.3	8.2
3	#13710.00	46.6 PK	88.2	-41.6	1.68 H	4	30.3	16.3
4	#13710.00	34.1 AV	68.2	-34.1	1.68 H	4	17.8	16.3
5	20565.00	57.5 PK	74.0	-16.5	1.80 H	23	61.2	-3.7
6	20565.00	45.2 AV	54.0	-8.8	1.80 H	23	48.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

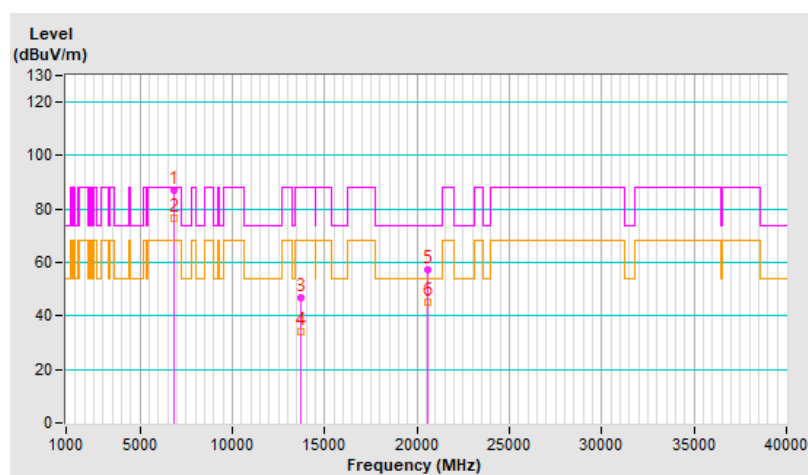


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	99.8 PK			1.53 V	69	91.6	8.2
2	*6855.00	89.0 AV			1.53 V	69	80.8	8.2
3	#13710.00	47.1 PK	88.2	-41.1	1.70 V	18	30.8	16.3
4	#13710.00	34.6 AV	68.2	-33.6	1.70 V	18	18.3	16.3
5	20565.00	57.6 PK	74.0	-16.4	1.74 V	50	61.3	-3.7
6	20565.00	45.1 AV	54.0	-8.9	1.74 V	50	48.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

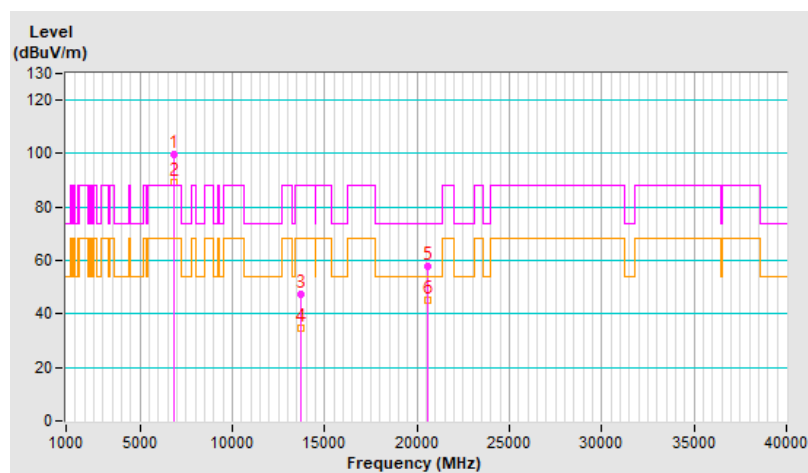


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	86.8 PK			1.47 H	61	78.5	8.3
2	*6875.00	76.6 AV			1.47 H	61	68.3	8.3
3	#13750.00	46.9 PK	88.2	-41.3	1.69 H	15	30.4	16.5
4	#13750.00	34.7 AV	68.2	-33.5	1.69 H	15	18.2	16.5
5	20625.00	56.9 PK	74.0	-17.1	1.72 H	32	60.6	-3.7
6	20625.00	44.5 AV	54.0	-9.5	1.72 H	32	48.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

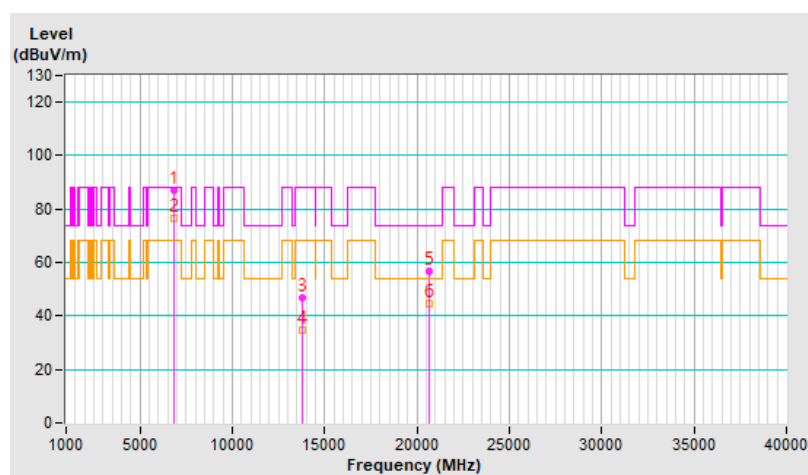


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.1 PK			1.48 V	65	90.8	8.3
2	*6875.00	88.4 AV			1.48 V	65	80.1	8.3
3	#13750.00	45.9 PK	88.2	-42.3	1.69 V	0	29.4	16.5
4	#13750.00	33.9 AV	68.2	-34.3	1.69 V	0	17.4	16.5
5	20625.00	56.9 PK	74.0	-17.1	1.78 V	43	60.6	-3.7
6	20625.00	44.5 AV	54.0	-9.5	1.78 V	43	48.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

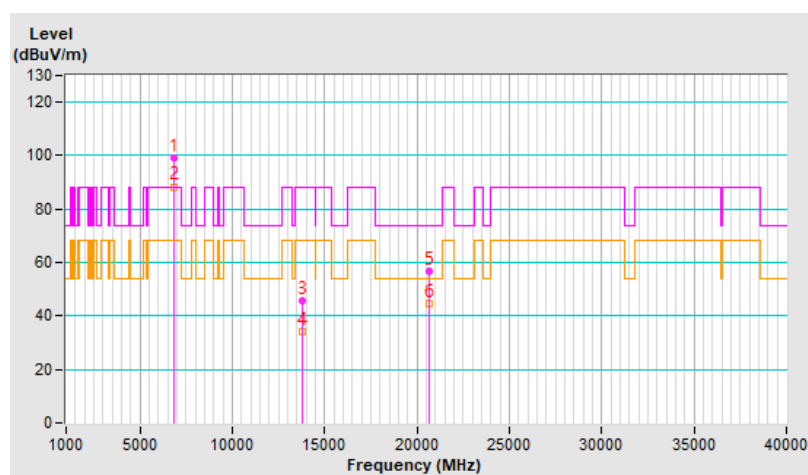


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	86.9 PK			1.42 H	62	76.9	10.0
2	*7115.00	76.8 AV			1.42 H	62	66.8	10.0
3	#7125.00	55.4 PK	88.2	-32.8	1.42 H	62	45.3	10.1
4	#7125.00	44.1 AV	68.2	-24.1	1.42 H	62	34.0	10.1
5	#14230.00	46.6 PK	88.2	-41.6	1.61 H	0	27.9	18.7
6	#14230.00	34.4 AV	68.2	-33.8	1.61 H	0	15.7	18.7
7	21345.00	56.8 PK	74.0	-17.2	1.72 H	35	59.3	-2.5
8	21345.00	44.7 AV	54.0	-9.3	1.72 H	35	47.2	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

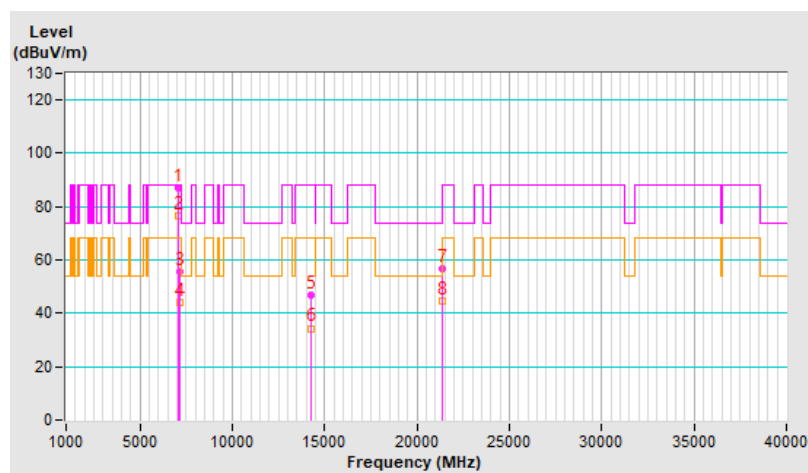


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.0 PK			1.25 V	81	89.0	10.0
2	*7115.00	89.1 AV			1.25 V	81	79.1	10.0
3	#7125.00	58.6 PK	88.2	-29.6	1.25 V	81	48.5	10.1
4	#7125.00	44.4 AV	68.2	-23.8	1.25 V	81	34.3	10.1
5	#14230.00	45.9 PK	88.2	-42.3	1.68 V	11	27.2	18.7
6	#14230.00	33.9 AV	68.2	-34.3	1.68 V	11	15.2	18.7
7	21345.00	57.5 PK	74.0	-16.5	1.78 V	21	60.0	-2.5
8	21345.00	44.9 AV	54.0	-9.1	1.78 V	21	47.4	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

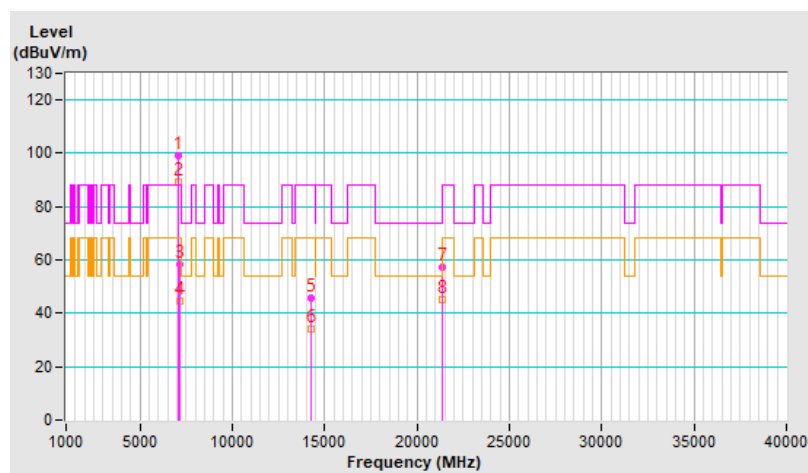


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.1 PK	88.2	-37.1	1.24 H	261	45.5	5.6
2	#5925.00	39.6 AV	68.2	-28.6	1.24 H	261	34.0	5.6
3	*5955.00	89.2 PK			1.24 H	261	83.7	5.5
4	*5955.00	77.9 AV			1.24 H	261	72.4	5.5
5	11910.00	47.0 PK	74.0	-27.0	1.62 H	0	32.4	14.6
6	11910.00	34.8 AV	54.0	-19.2	1.62 H	0	20.2	14.6
7	17865.00	56.5 PK	74.0	-17.5	1.78 H	28	30.6	25.9
8	17865.00	44.4 AV	54.0	-9.6	1.78 H	28	18.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

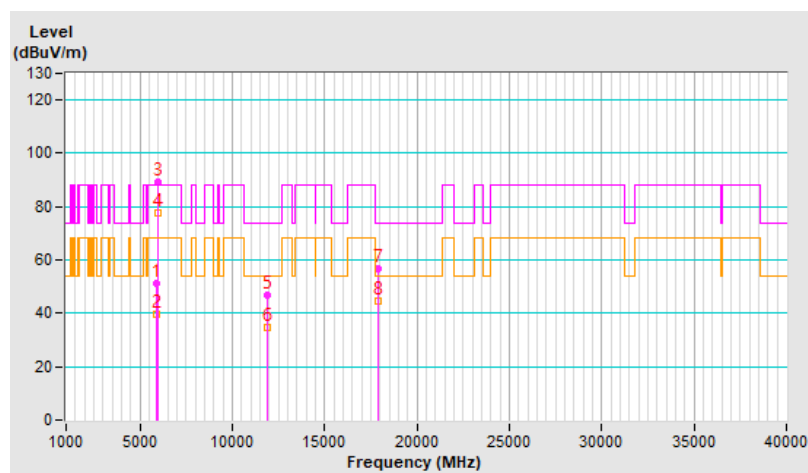


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	50.5 PK	88.2	-37.7	1.38 V	81	44.9	5.6
2	#5925.00	39.5 AV	68.2	-28.7	1.38 V	81	33.9	5.6
3	*5955.00	99.9 PK			1.38 V	81	94.4	5.5
4	*5955.00	90.1 AV			1.38 V	81	84.6	5.5
5	11910.00	46.2 PK	74.0	-27.8	1.68 V	16	31.6	14.6
6	11910.00	33.9 AV	54.0	-20.1	1.68 V	16	19.3	14.6
7	17865.00	57.2 PK	74.0	-16.8	1.73 V	18	31.3	25.9
8	17865.00	44.4 AV	54.0	-9.6	1.73 V	18	18.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

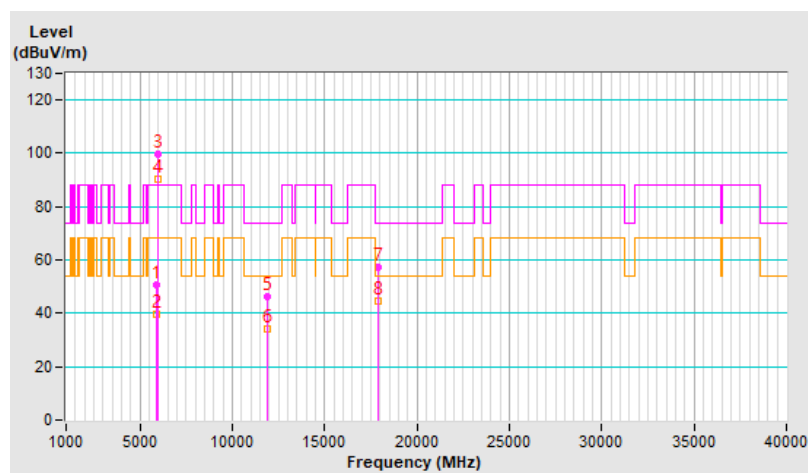


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	89.6 PK			1.52 H	66	82.8	6.8
2	*6415.00	77.2 AV			1.52 H	66	70.4	6.8
3	#12830.00	46.3 PK	88.2	-41.9	1.70 H	0	31.2	15.1
4	#12830.00	34.2 AV	68.2	-34.0	1.70 H	0	19.1	15.1
5	19245.00	56.6 PK	74.0	-17.4	1.77 H	43	61.2	-4.6
6	19245.00	44.3 AV	54.0	-9.7	1.77 H	43	48.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

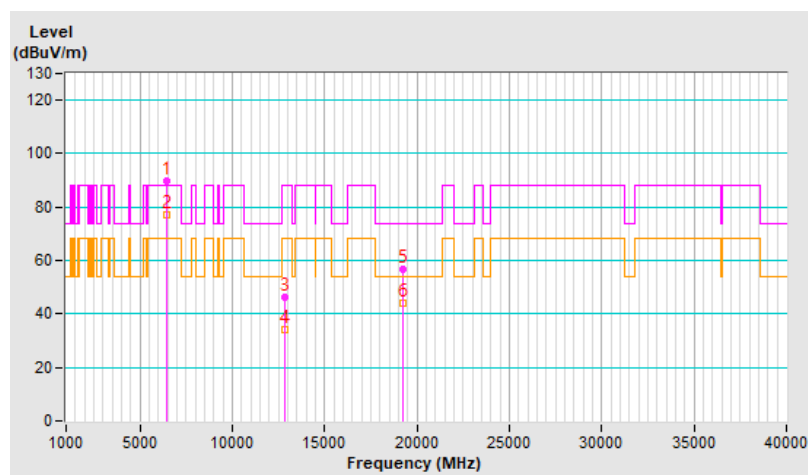


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	99.8 PK			1.44 V	92	93.0	6.8
2	*6415.00	88.8 AV			1.44 V	92	82.0	6.8
3	#12830.00	46.7 PK	88.2	-41.5	1.66 V	3	31.6	15.1
4	#12830.00	34.2 AV	68.2	-34.0	1.66 V	3	19.1	15.1
5	19245.00	57.4 PK	74.0	-16.6	1.78 V	28	62.0	-4.6
6	19245.00	45.0 AV	54.0	-9.0	1.78 V	28	49.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

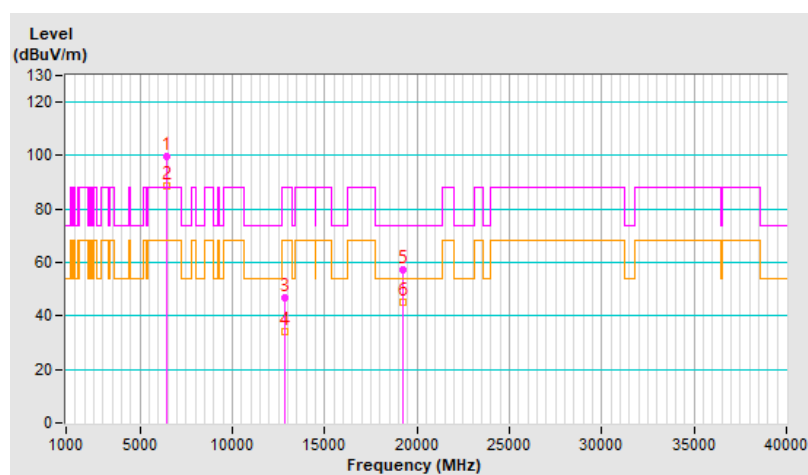


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	89.9 PK			1.50 H	47	83.0	6.9
2	*6435.00	77.4 AV			1.50 H	47	70.5	6.9
3	#12870.00	46.7 PK	88.2	-41.5	1.64 H	12	31.5	15.2
4	#12870.00	34.7 AV	68.2	-33.5	1.64 H	12	19.5	15.2
5	19305.00	57.2 PK	74.0	-16.8	1.77 H	25	61.7	-4.5
6	19305.00	44.8 AV	54.0	-9.2	1.77 H	25	49.3	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

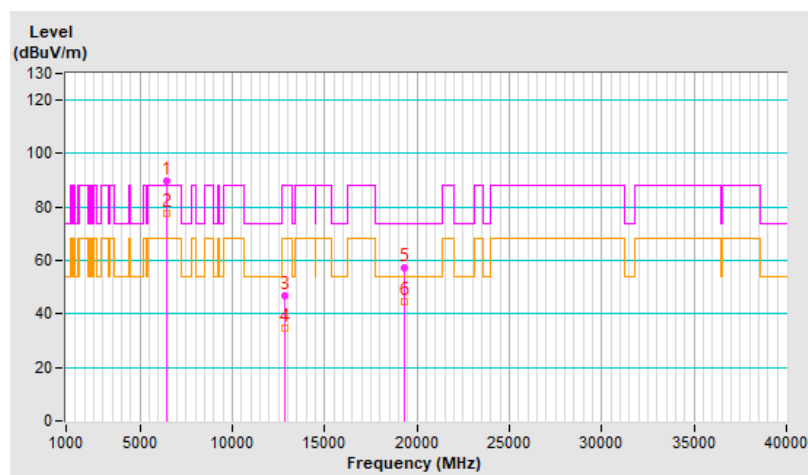


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.1 PK			1.36 V	69	93.2	6.9
2	*6435.00	90.2 AV			1.36 V	69	83.3	6.9
3	#12870.00	47.2 PK	88.2	-41.0	1.61 V	4	32.0	15.2
4	#12870.00	34.8 AV	68.2	-33.4	1.61 V	4	19.6	15.2
5	19305.00	57.5 PK	74.0	-16.5	1.80 V	43	62.0	-4.5
6	19305.00	45.3 AV	54.0	-8.7	1.80 V	43	49.8	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

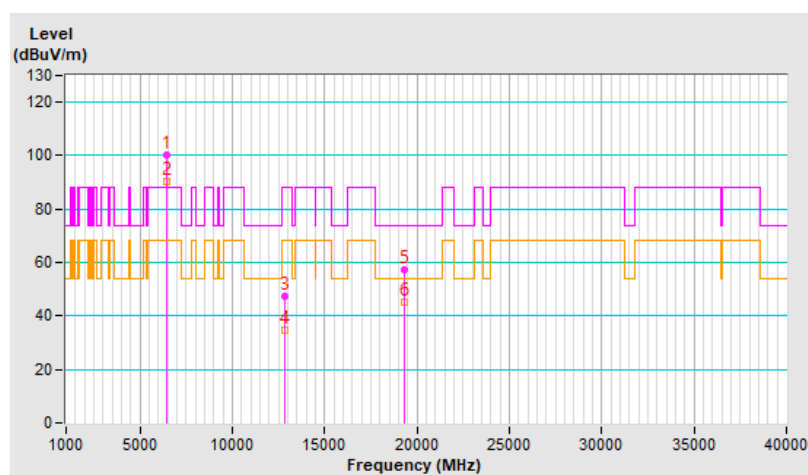


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	89.9 PK			1.49 H	47	82.7	7.2
2	*6515.00	77.3 AV			1.49 H	47	70.1	7.2
3	#13030.00	46.5 PK	88.2	-41.7	1.71 H	0	31.5	15.0
4	#13030.00	34.5 AV	68.2	-33.7	1.71 H	0	19.5	15.0
5	19545.00	57.5 PK	74.0	-16.5	1.82 H	47	62.3	-4.8
6	19545.00	44.9 AV	54.0	-9.1	1.82 H	47	49.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

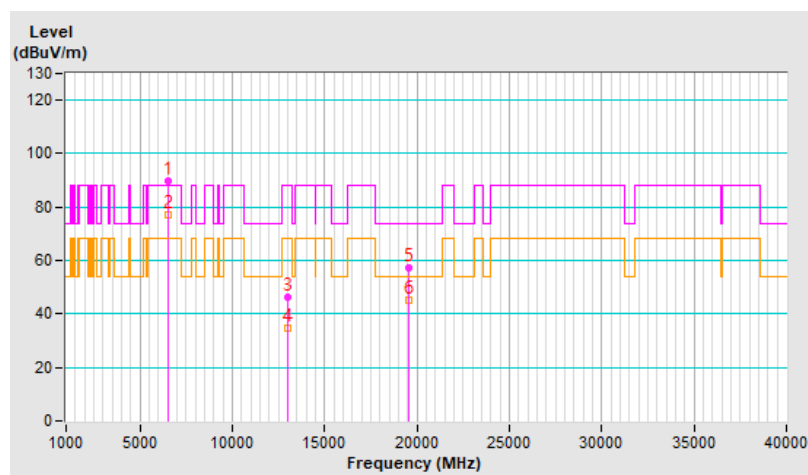


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	99.8 PK			1.33 V	68	92.6	7.2
2	*6515.00	90.1 AV			1.33 V	68	82.9	7.2
3	#13030.00	47.3 PK	88.2	-40.9	1.56 V	6	32.3	15.0
4	#13030.00	35.2 AV	68.2	-33.0	1.56 V	6	20.2	15.0
5	19545.00	57.0 PK	74.0	-17.0	1.75 V	49	61.8	-4.8
6	19545.00	44.8 AV	54.0	-9.2	1.75 V	49	49.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

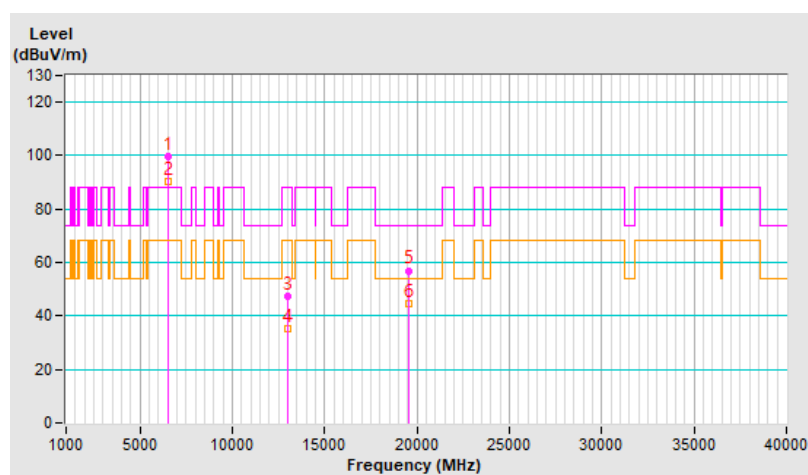


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	90.0 PK			1.51 H	79	82.6	7.4
2	*6535.00	77.5 AV			1.51 H	79	70.1	7.4
3	#13070.00	46.4 PK	88.2	-41.8	1.70 H	8	31.3	15.1
4	#13070.00	34.3 AV	68.2	-33.9	1.70 H	8	19.2	15.1
5	19605.00	57.3 PK	74.0	-16.7	1.71 H	25	62.1	-4.8
6	19605.00	44.8 AV	54.0	-9.2	1.71 H	25	49.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

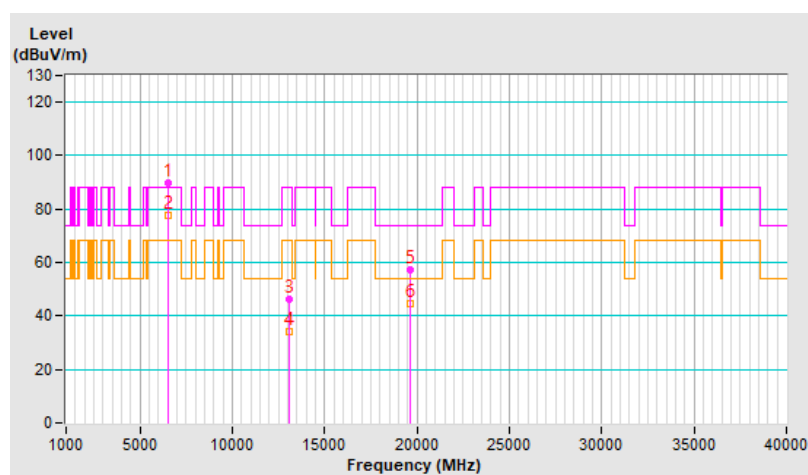


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	100.1 PK			1.39 V	85	92.7	7.4
2	*6535.00	90.3 AV			1.39 V	85	82.9	7.4
3	#13070.00	46.8 PK	88.2	-41.4	1.62 V	14	31.7	15.1
4	#13070.00	34.3 AV	68.2	-33.9	1.62 V	14	19.2	15.1
5	19605.00	56.8 PK	74.0	-17.2	1.71 V	45	61.6	-4.8
6	19605.00	44.7 AV	54.0	-9.3	1.71 V	45	49.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

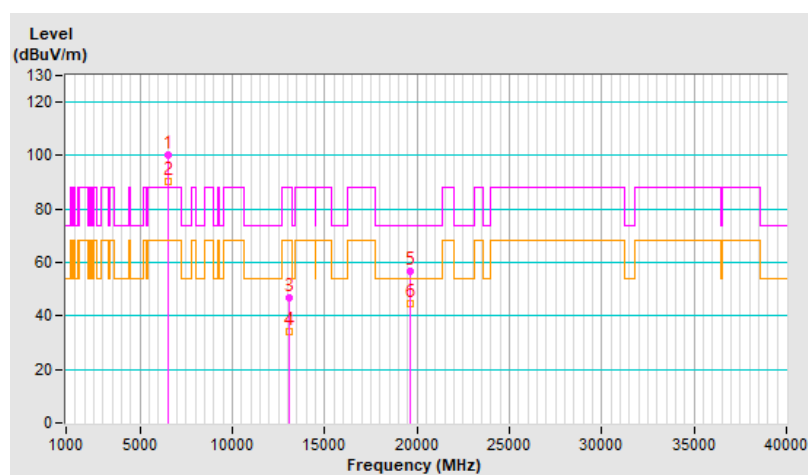


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	90.1 PK			1.44 H	58	81.9	8.2
2	*6855.00	77.6 AV			1.44 H	58	69.4	8.2
3	#13710.00	46.7 PK	88.2	-41.5	1.61 H	14	30.4	16.3
4	#13710.00	34.7 AV	68.2	-33.5	1.61 H	14	18.4	16.3
5	20565.00	57.4 PK	74.0	-16.6	1.76 H	49	61.1	-3.7
6	20565.00	45.2 AV	54.0	-8.8	1.76 H	49	48.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

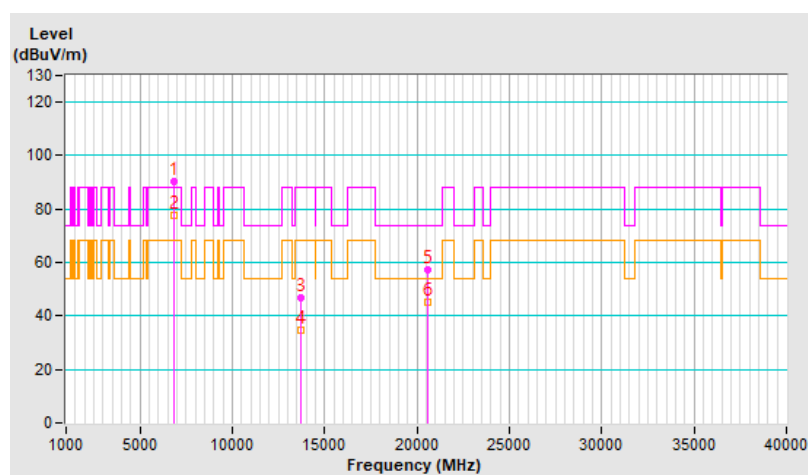


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	100.3 PK			1.41 V	87	92.1	8.2
2	*6855.00	90.6 AV			1.41 V	87	82.4	8.2
3	#13710.00	46.2 PK	88.2	-42.0	1.68 V	8	29.9	16.3
4	#13710.00	33.8 AV	68.2	-34.4	1.68 V	8	17.5	16.3
5	20565.00	57.4 PK	74.0	-16.6	1.75 V	37	61.1	-3.7
6	20565.00	45.0 AV	54.0	-9.0	1.75 V	37	48.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

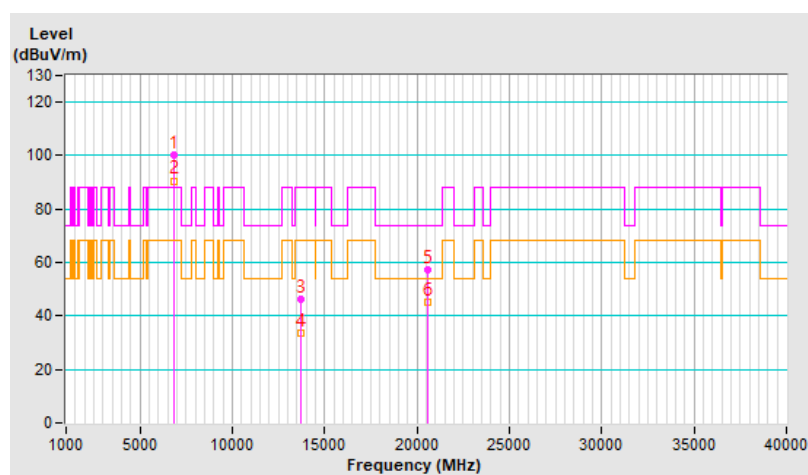


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	89.4 PK			1.40 H	73	81.1	8.3
2	*6875.00	77.2 AV			1.40 H	73	68.9	8.3
3	#13750.00	46.9 PK	88.2	-41.3	1.64 H	3	30.4	16.5
4	#13750.00	34.6 AV	68.2	-33.6	1.64 H	3	18.1	16.5
5	20625.00	57.0 PK	74.0	-17.0	1.75 H	33	60.7	-3.7
6	20625.00	44.7 AV	54.0	-9.3	1.75 H	33	48.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

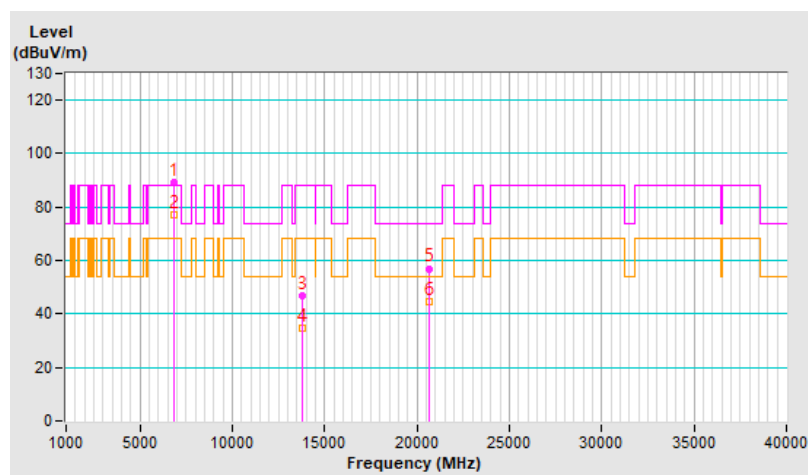


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.2 PK			1.40 V	70	91.9	8.3
2	*6875.00	90.3 AV			1.40 V	70	82.0	8.3
3	#13750.00	46.5 PK	88.2	-41.7	1.70 V	8	30.0	16.5
4	#13750.00	34.3 AV	68.2	-33.9	1.70 V	8	17.8	16.5
5	20625.00	57.1 PK	74.0	-16.9	1.75 V	20	60.8	-3.7
6	20625.00	44.6 AV	54.0	-9.4	1.75 V	20	48.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

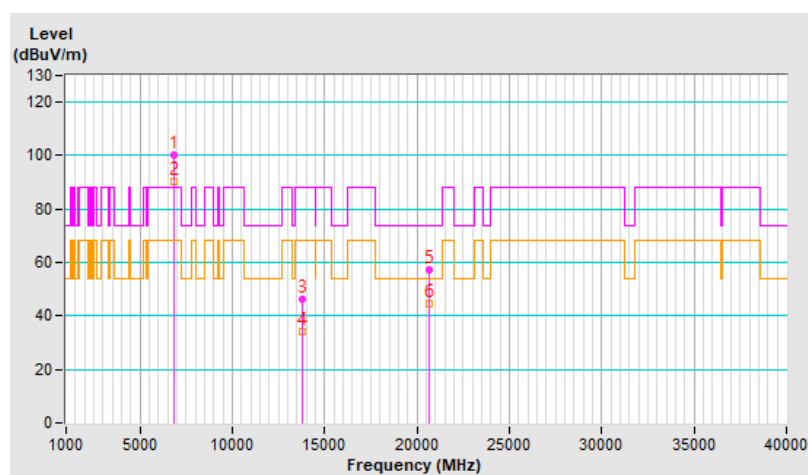


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.5 PK			1.46 H	63	79.5	10.0
2	*7115.00	77.2 AV			1.46 H	63	67.2	10.0
3	#7125.00	54.9 PK	88.2	-33.3	1.46 H	63	44.8	10.1
4	#7125.00	47.5 AV	68.2	-20.7	1.46 H	63	37.4	10.1
5	#14230.00	46.4 PK	88.2	-41.8	1.69 H	5	27.7	18.7
6	#14230.00	34.2 AV	68.2	-34.0	1.69 H	5	15.5	18.7
7	21345.00	57.1 PK	74.0	-16.9	1.72 H	31	59.6	-2.5
8	21345.00	44.7 AV	54.0	-9.3	1.72 H	31	47.2	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

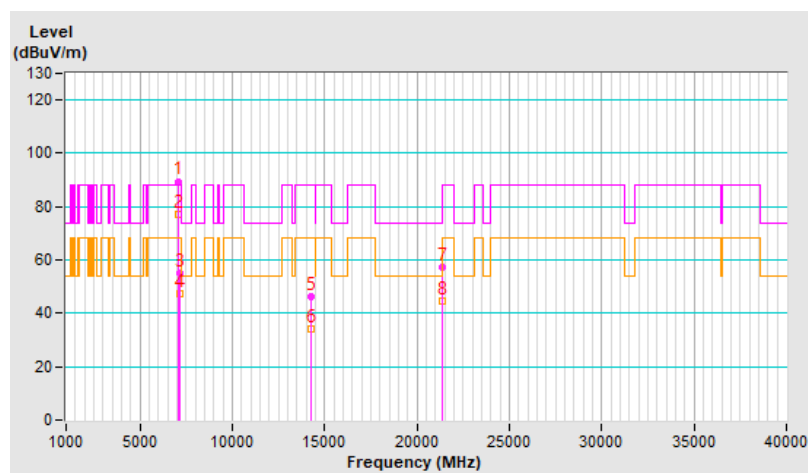


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.4 PK			1.22 V	82	90.4	10.0
2	*7115.00	90.1 AV			1.22 V	82	80.1	10.0
3	#7125.00	58.7 PK	88.2	-29.5	1.22 V	82	48.6	10.1
4	#7125.00	49.9 AV	68.2	-18.3	1.22 V	82	39.8	10.1
5	#14230.00	47.1 PK	88.2	-41.1	1.61 V	18	28.4	18.7
6	#14230.00	34.6 AV	68.2	-33.6	1.61 V	18	15.9	18.7
7	21345.00	57.8 PK	74.0	-16.2	1.81 V	24	60.3	-2.5
8	21345.00	45.2 AV	54.0	-8.8	1.81 V	24	47.7	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

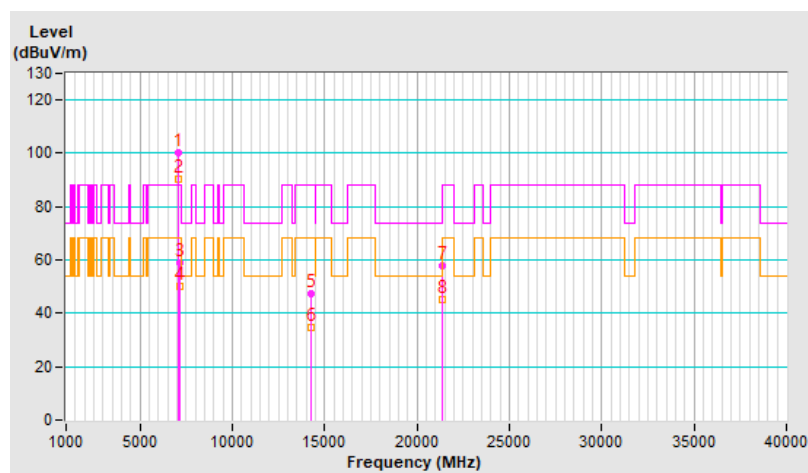


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.2 PK	88.2	-37.0	1.21 H	263	45.6	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.21 H	263	34.1	5.6
3	*5985.00	89.3 PK			1.21 H	263	83.8	5.5
4	*5985.00	78.4 AV			1.21 H	263	72.9	5.5
5	11970.00	46.5 PK	74.0	-27.5	1.71 H	17	32.0	14.5
6	11970.00	34.3 AV	54.0	-19.7	1.71 H	17	19.8	14.5
7	17955.00	57.4 PK	74.0	-16.6	1.73 H	28	29.1	28.3
8	17955.00	45.2 AV	54.0	-8.8	1.73 H	28	16.9	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

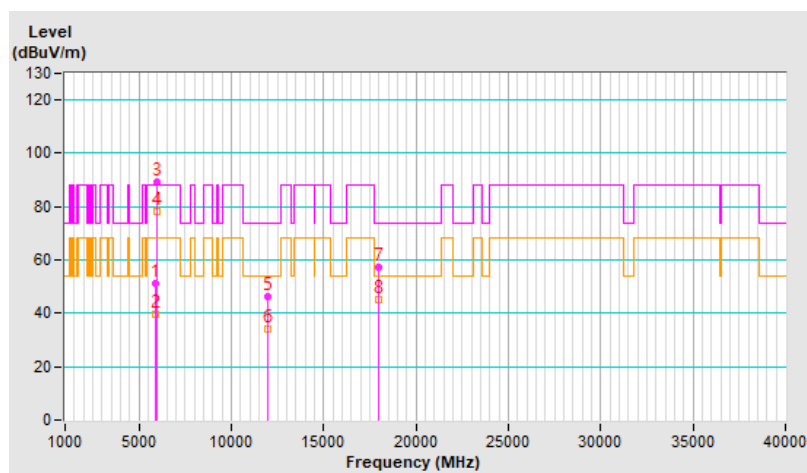


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.8 PK	88.2	-35.4	1.67 V	81	47.2	5.6
2	#5925.00	40.9 AV	68.2	-27.3	1.67 V	81	35.3	5.6
3	*5985.00	102.9 PK			1.67 V	81	97.4	5.5
4	*5985.00	91.3 AV			1.67 V	81	85.8	5.5
5	11970.00	46.6 PK	74.0	-27.4	1.68 V	14	32.1	14.5
6	11970.00	34.3 AV	54.0	-19.7	1.68 V	14	19.8	14.5
7	17955.00	56.9 PK	74.0	-17.1	1.77 V	38	28.6	28.3
8	17955.00	44.9 AV	54.0	-9.1	1.77 V	38	16.6	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

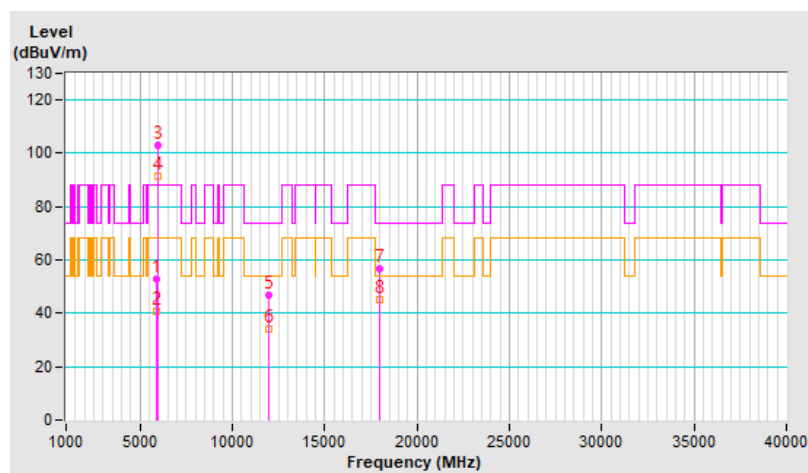


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	88.3 PK			1.00 H	225	81.7	6.6
2	*6385.00	77.8 AV			1.00 H	225	71.2	6.6
3	#12770.00	46.6 PK	88.2	-41.6	1.66 H	4	31.7	14.9
4	#12770.00	34.2 AV	68.2	-34.0	1.66 H	4	19.3	14.9
5	19155.00	56.7 PK	74.0	-17.3	1.78 H	34	61.4	-4.7
6	19155.00	44.3 AV	54.0	-9.7	1.78 H	34	49.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

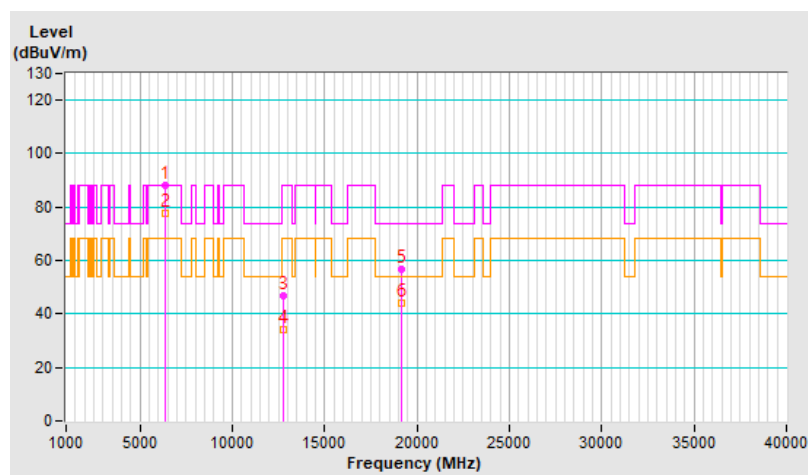


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	103.4 PK			1.69 V	87	96.8	6.6
2	*6385.00	91.7 AV			1.69 V	87	85.1	6.6
3	#12770.00	46.4 PK	88.2	-41.8	1.61 V	9	31.5	14.9
4	#12770.00	34.1 AV	68.2	-34.1	1.61 V	9	19.2	14.9
5	19155.00	56.9 PK	74.0	-17.1	1.75 V	50	61.6	-4.7
6	19155.00	44.3 AV	54.0	-9.7	1.75 V	50	49.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

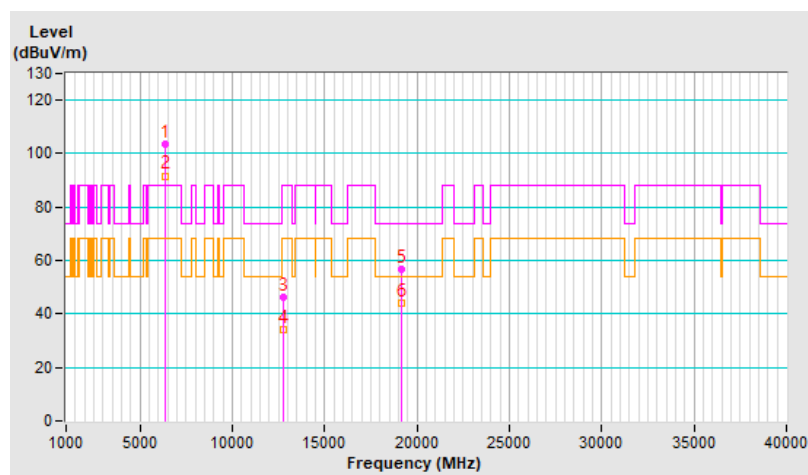


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	88.2 PK			1.02 H	244	81.2	7.0
2	*6465.00	78.0 AV			1.02 H	244	71.0	7.0
3	#12930.00	46.6 PK	88.2	-41.6	1.69 H	2	31.4	15.2
4	#12930.00	34.2 AV	68.2	-34.0	1.69 H	2	19.0	15.2
5	19395.00	57.1 PK	74.0	-16.9	1.75 H	27	61.6	-4.5
6	19395.00	45.1 AV	54.0	-8.9	1.75 H	27	49.6	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

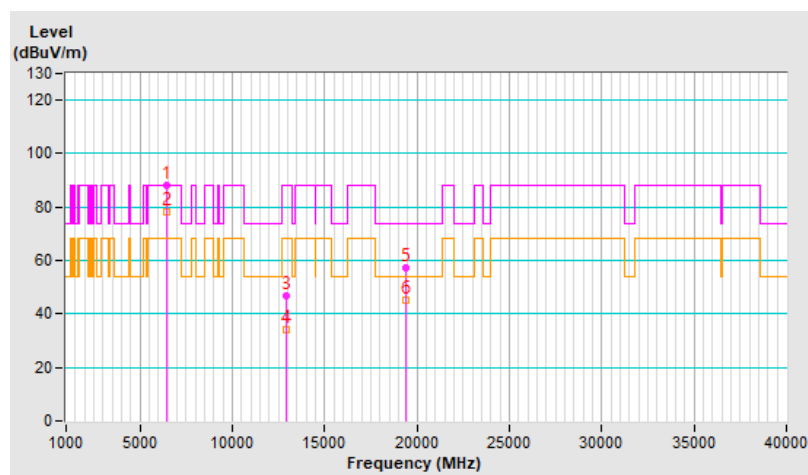


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.2 PK			1.72 V	78	96.2	7.0
2	*6465.00	91.3 AV			1.72 V	78	84.3	7.0
3	#12930.00	46.4 PK	88.2	-41.8	1.69 V	4	31.2	15.2
4	#12930.00	34.2 AV	68.2	-34.0	1.69 V	4	19.0	15.2
5	19395.00	57.7 PK	74.0	-16.3	1.72 V	41	62.2	-4.5
6	19395.00	45.2 AV	54.0	-8.8	1.72 V	41	49.7	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

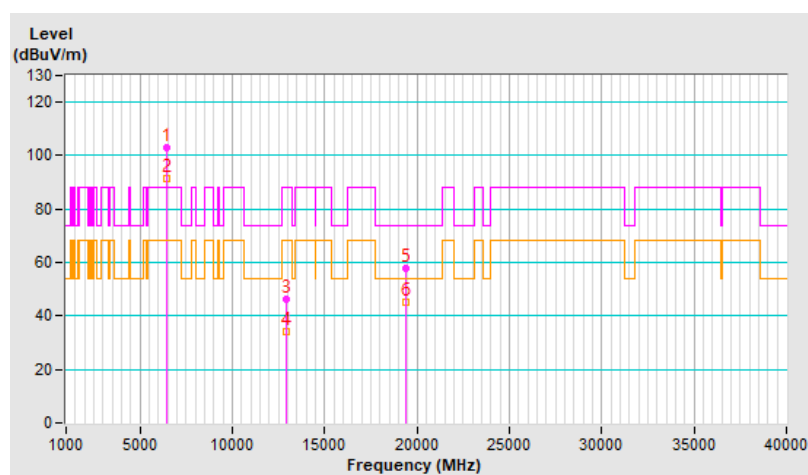


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	88.4 PK			1.00 H	227	81.0	7.4
2	*6545.00	77.8 AV			1.00 H	227	70.4	7.4
3	#13090.00	46.4 PK	88.2	-41.8	1.63 H	18	31.2	15.2
4	#13090.00	34.3 AV	68.2	-33.9	1.63 H	18	19.1	15.2
5	19635.00	57.5 PK	74.0	-16.5	1.72 H	42	62.2	-4.7
6	19635.00	45.3 AV	54.0	-8.7	1.72 H	42	50.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

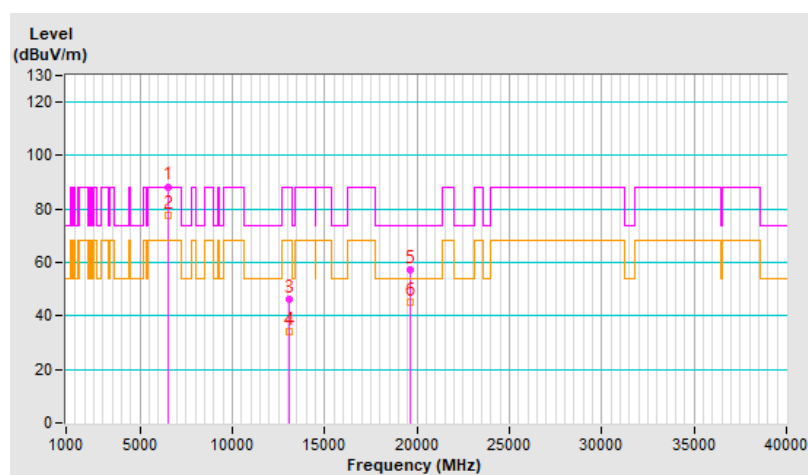


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	102.9 PK			1.69 V	77	95.5	7.4
2	*6545.00	91.3 AV			1.69 V	77	83.9	7.4
3	#13090.00	46.8 PK	88.2	-41.4	1.69 V	17	31.6	15.2
4	#13090.00	34.8 AV	68.2	-33.4	1.69 V	17	19.6	15.2
5	19635.00	57.3 PK	74.0	-16.7	1.82 V	50	62.0	-4.7
6	19635.00	45.2 AV	54.0	-8.8	1.82 V	50	49.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

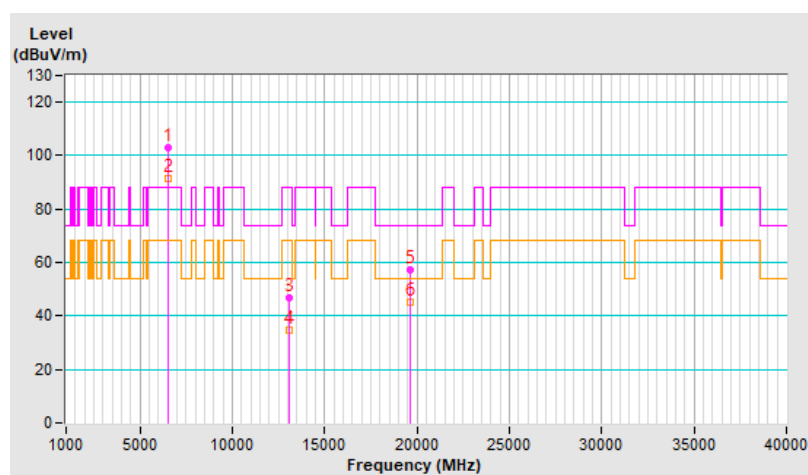


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	88.0 PK			1.02 H	231	80.2	7.8
2	*6625.00	77.7 AV			1.02 H	231	69.9	7.8
3	13250.00	46.7 PK	74.0	-27.3	1.60 H	14	31.3	15.4
4	13250.00	34.2 AV	54.0	-19.8	1.60 H	14	18.8	15.4
5	19875.00	56.8 PK	74.0	-17.2	1.78 H	49	61.3	-4.5
6	19875.00	44.7 AV	54.0	-9.3	1.78 H	49	49.2	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

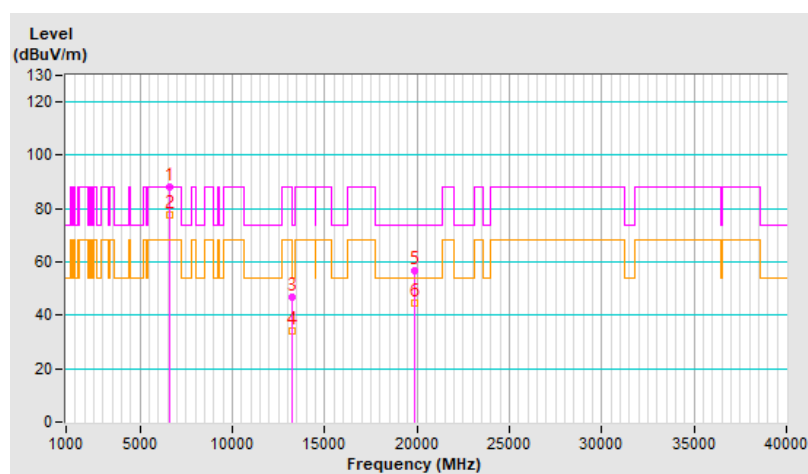


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	103.2 PK			1.68 V	65	95.4	7.8
2	*6625.00	91.6 AV			1.68 V	65	83.8	7.8
3	13250.00	46.4 PK	74.0	-27.6	1.62 V	0	31.0	15.4
4	13250.00	34.2 AV	54.0	-19.8	1.62 V	0	18.8	15.4
5	19875.00	57.4 PK	74.0	-16.6	1.77 V	46	61.9	-4.5
6	19875.00	44.9 AV	54.0	-9.1	1.77 V	46	49.4	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

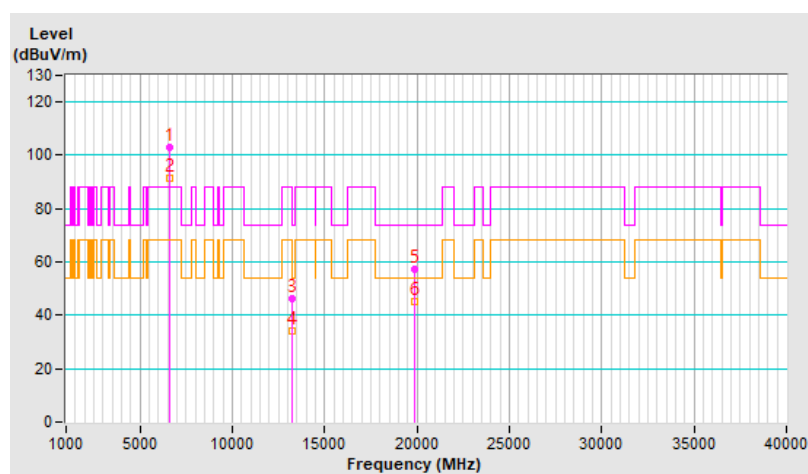


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	88.0 PK			1.00 H	240	80.3	7.7
2	*6785.00	77.9 AV			1.00 H	240	70.2	7.7
3	#13570.00	46.7 PK	88.2	-41.5	1.64 H	3	31.0	15.7
4	#13570.00	34.7 AV	68.2	-33.5	1.64 H	3	19.0	15.7
5	20355.00	57.1 PK	74.0	-16.9	1.78 H	40	60.9	-3.8
6	20355.00	44.9 AV	54.0	-9.1	1.78 H	40	48.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

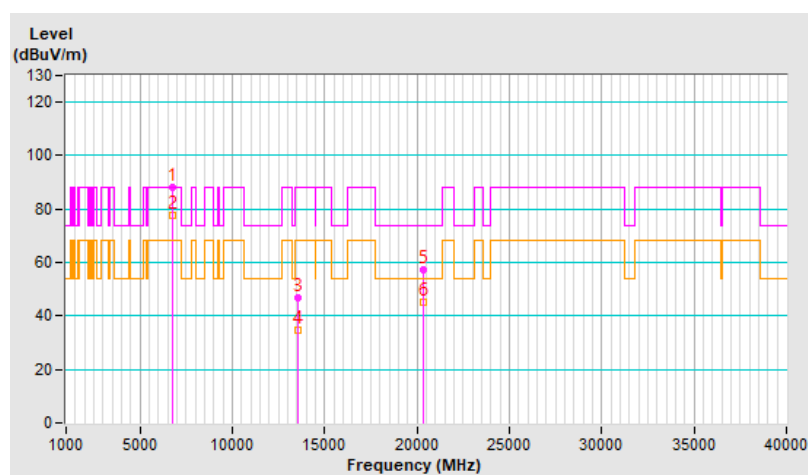


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	103.4 PK			1.72 V	94	95.7	7.7
2	*6785.00	91.6 AV			1.72 V	94	83.9	7.7
3	#13570.00	46.7 PK	88.2	-41.5	1.72 V	17	31.0	15.7
4	#13570.00	34.5 AV	68.2	-33.7	1.72 V	17	18.8	15.7
5	20355.00	57.6 PK	74.0	-16.4	1.74 V	40	61.4	-3.8
6	20355.00	45.0 AV	54.0	-9.0	1.74 V	40	48.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

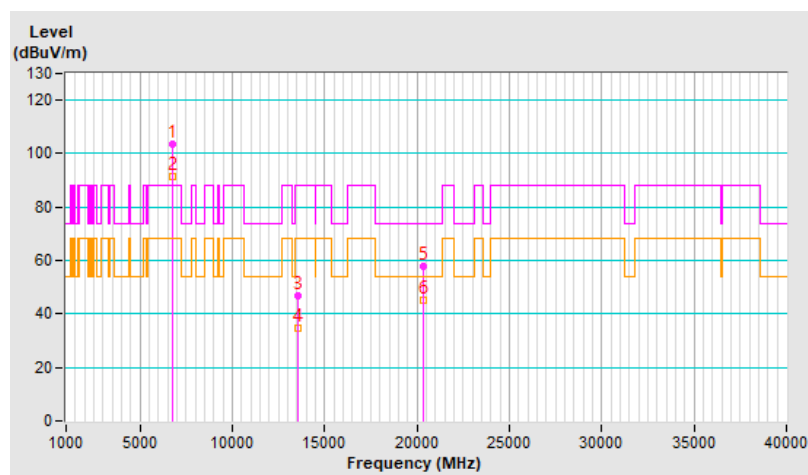


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	88.9 PK			1.00 H	226	80.7	8.2
2	*6865.00	78.6 AV			1.00 H	226	70.4	8.2
3	#13730.00	47.0 PK	88.2	-41.2	1.71 H	12	30.6	16.4
4	#13730.00	34.6 AV	68.2	-33.6	1.71 H	12	18.2	16.4
5	20595.00	57.3 PK	74.0	-16.7	1.76 H	35	61.1	-3.8
6	20595.00	44.7 AV	54.0	-9.3	1.76 H	35	48.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

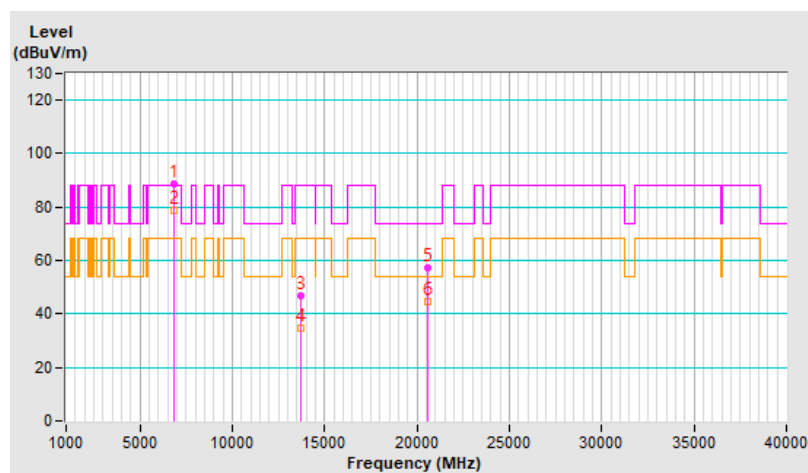


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	102.6 PK			1.70 V	86	94.4	8.2
2	*6865.00	91.3 AV			1.70 V	86	83.1	8.2
3	#13730.00	47.0 PK	88.2	-41.2	1.65 V	0	30.6	16.4
4	#13730.00	34.7 AV	68.2	-33.5	1.65 V	0	18.3	16.4
5	20595.00	57.7 PK	74.0	-16.3	1.74 V	48	61.5	-3.8
6	20595.00	45.2 AV	54.0	-8.8	1.74 V	48	49.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

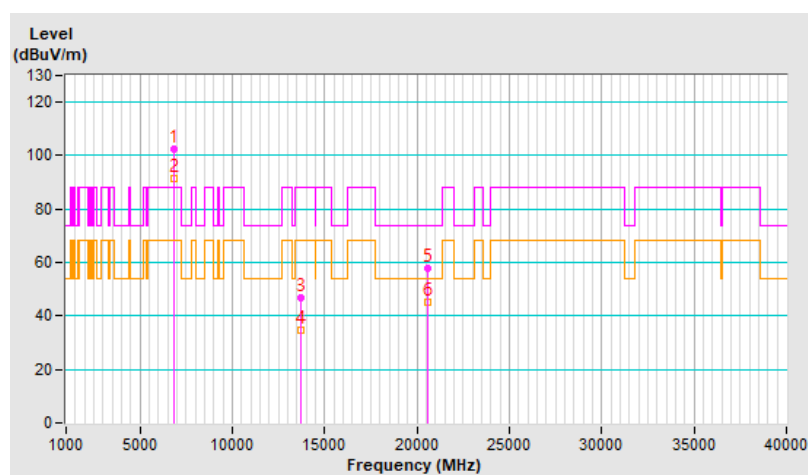


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	88.5 PK			1.00 H	235	79.6	8.9
2	*7025.00	78.2 AV			1.00 H	235	69.3	8.9
3	#7125.00	57.6 PK	88.2	-30.6	1.00 H	235	47.5	10.1
4	#7125.00	44.3 AV	68.2	-23.9	1.00 H	235	34.2	10.1
5	#14050.00	46.8 PK	88.2	-41.4	1.67 H	11	29.1	17.7
6	#14050.00	34.6 AV	68.2	-33.6	1.67 H	11	16.9	17.7
7	21075.00	56.9 PK	74.0	-17.1	1.76 H	25	59.9	-3.0
8	21075.00	44.5 AV	54.0	-9.5	1.76 H	25	47.5	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

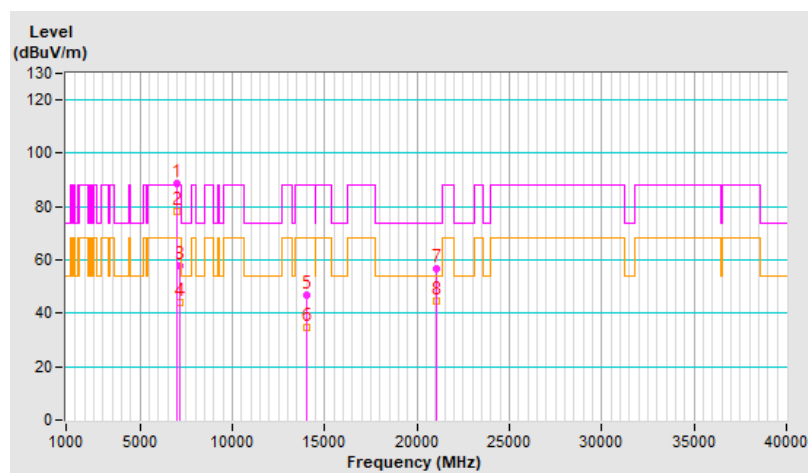


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	102.0 PK			1.38 V	82	93.1	8.9
2	*7025.00	90.9 AV			1.38 V	82	82.0	8.9
3	#7125.00	56.2 PK	88.2	-32.0	1.38 V	82	46.1	10.1
4	#7125.00	44.4 AV	68.2	-23.8	1.38 V	82	34.3	10.1
5	#14050.00	46.5 PK	88.2	-41.7	1.60 V	17	28.8	17.7
6	#14050.00	34.4 AV	68.2	-33.8	1.60 V	17	16.7	17.7
7	21075.00	56.9 PK	74.0	-17.1	1.71 V	43	59.9	-3.0
8	21075.00	44.7 AV	54.0	-9.3	1.71 V	43	47.7	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

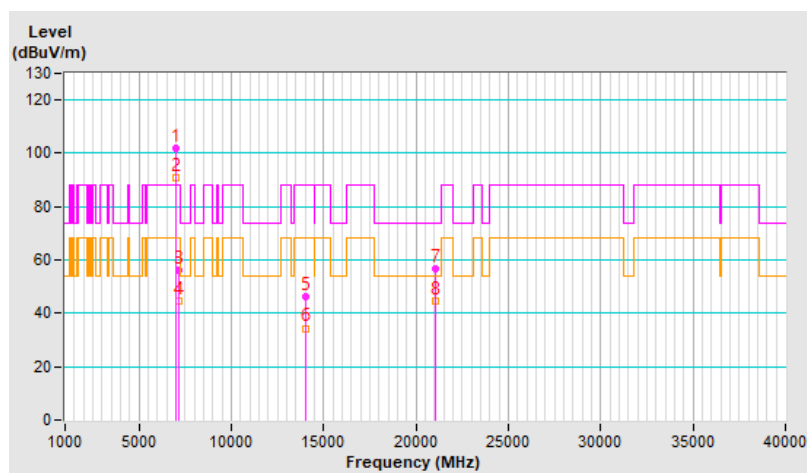


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	2.42 H	133	46.5	5.6
2	#5925.00	39.6 AV	68.2	-28.6	2.42 H	133	34.0	5.6
3	*6025.00	90.7 PK			2.42 H	133	85.1	5.6
4	*6025.00	79.7 AV			2.42 H	133	74.1	5.6
5	12050.00	46.6 PK	74.0	-27.4	1.64 H	9	32.0	14.6
6	12050.00	34.4 AV	54.0	-19.6	1.64 H	9	19.8	14.6
7	18075.00	57.2 PK	74.0	-16.8	1.74 H	35	62.5	-5.3
8	18075.00	44.8 AV	54.0	-9.2	1.74 H	35	50.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

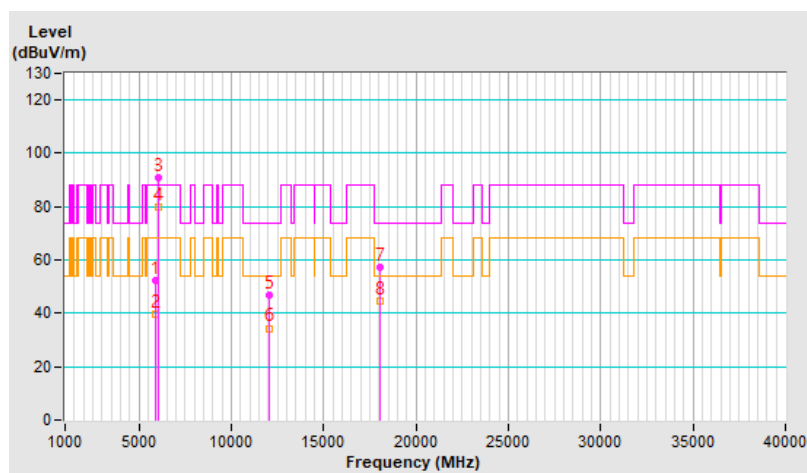


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.6 PK	88.2	-22.6	1.75 V	79	60.0	5.6
2	#5925.00	48.7 AV	68.2	-19.5	1.75 V	79	43.1	5.6
3	*6025.00	104.2 PK			1.75 V	79	98.6	5.6
4	*6025.00	93.3 AV			1.75 V	79	87.7	5.6
5	12050.00	46.7 PK	74.0	-27.3	1.70 V	17	32.1	14.6
6	12050.00	34.4 AV	54.0	-19.6	1.70 V	17	19.8	14.6
7	18075.00	56.7 PK	74.0	-17.3	1.72 V	20	62.0	-5.3
8	18075.00	44.6 AV	54.0	-9.4	1.72 V	20	49.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

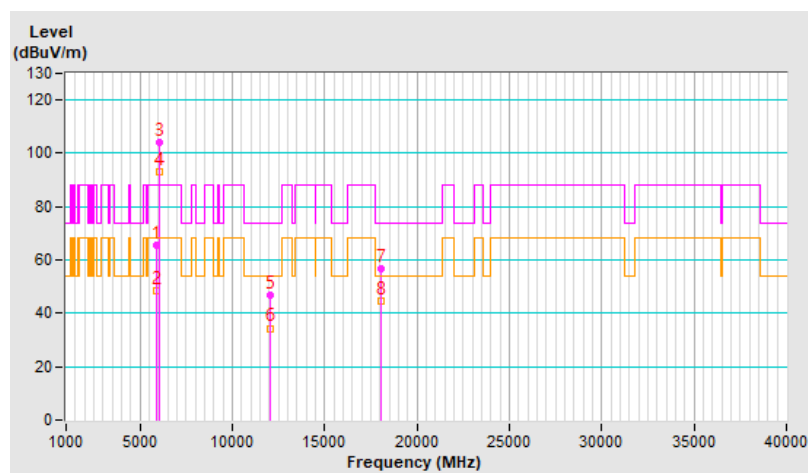


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	91.0 PK			2.37 H	142	85.2	5.8
2	*6185.00	79.8 AV			2.37 H	142	74.0	5.8
3	12370.00	46.8 PK	74.0	-27.2	1.68 H	12	32.1	14.7
4	12370.00	34.4 AV	54.0	-19.6	1.68 H	12	19.7	14.7
5	18555.00	56.4 PK	74.0	-17.6	1.73 H	32	61.8	-5.4
6	18555.00	44.3 AV	54.0	-9.7	1.73 H	32	49.7	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

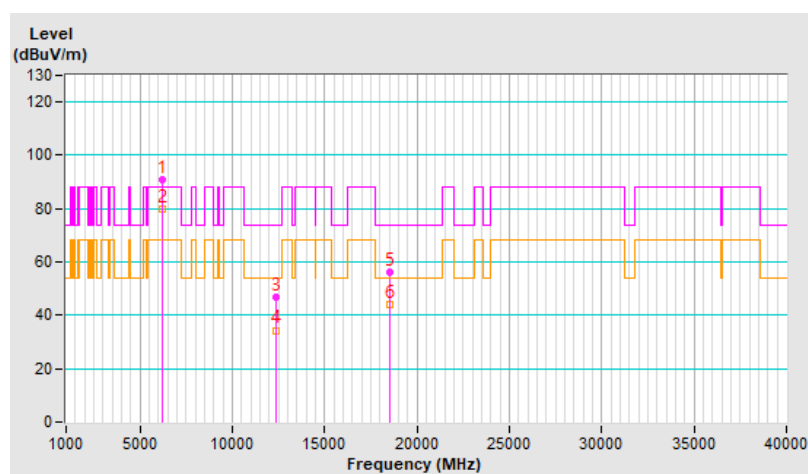


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	102.6 PK			1.73 V	93	96.8	5.8
2	*6185.00	91.0 AV			1.73 V	93	85.2	5.8
3	12370.00	46.6 PK	74.0	-27.4	1.71 V	18	31.9	14.7
4	12370.00	34.5 AV	54.0	-19.5	1.71 V	18	19.8	14.7
5	18555.00	57.1 PK	74.0	-16.9	1.79 V	36	62.5	-5.4
6	18555.00	44.6 AV	54.0	-9.4	1.79 V	36	50.0	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

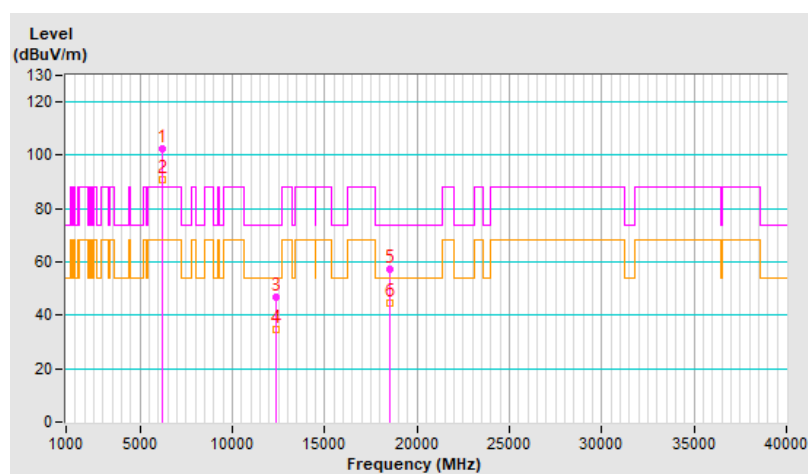


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	91.2 PK			2.47 H	119	84.8	6.4
2	*6345.00	80.0 AV			2.47 H	119	73.6	6.4
3	12690.00	46.3 PK	74.0	-27.7	1.68 H	8	31.4	14.9
4	12690.00	34.2 AV	54.0	-19.8	1.68 H	8	19.3	14.9
5	19035.00	57.7 PK	74.0	-16.3	1.81 H	46	62.6	-4.9
6	19035.00	45.3 AV	54.0	-8.7	1.81 H	46	50.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

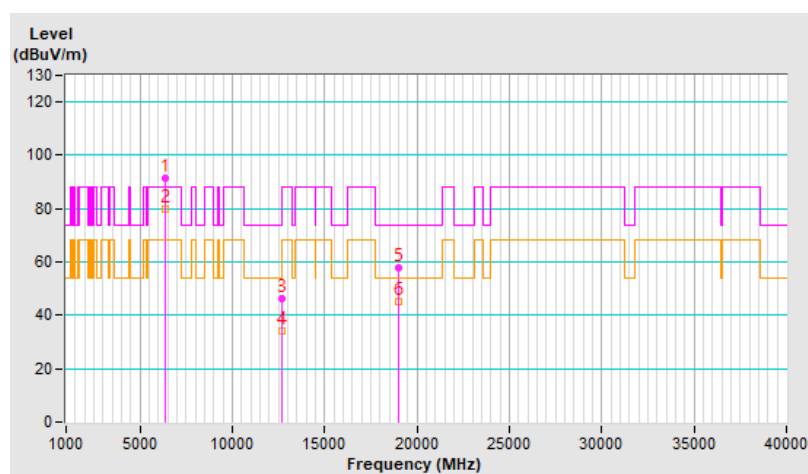


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	103.9 PK			1.75 V	74	97.5	6.4
2	*6345.00	93.2 AV			1.75 V	74	86.8	6.4
3	12690.00	45.9 PK	74.0	-28.1	1.67 V	5	31.0	14.9
4	12690.00	33.9 AV	54.0	-20.1	1.67 V	5	19.0	14.9
5	19035.00	57.4 PK	74.0	-16.6	1.77 V	49	62.3	-4.9
6	19035.00	45.0 AV	54.0	-9.0	1.77 V	49	49.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

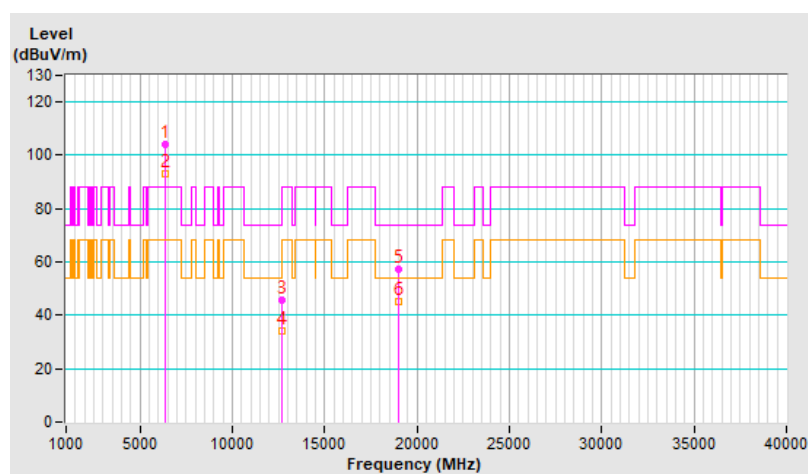


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	90.9 PK			2.44 H	120	83.7	7.2
2	*6505.00	79.7 AV			2.44 H	120	72.5	7.2
3	#13010.00	46.1 PK	88.2	-42.1	1.66 H	16	31.2	14.9
4	#13010.00	34.1 AV	68.2	-34.1	1.66 H	16	19.2	14.9
5	19515.00	56.9 PK	74.0	-17.1	1.80 H	27	61.6	-4.7
6	19515.00	44.6 AV	54.0	-9.4	1.80 H	27	49.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

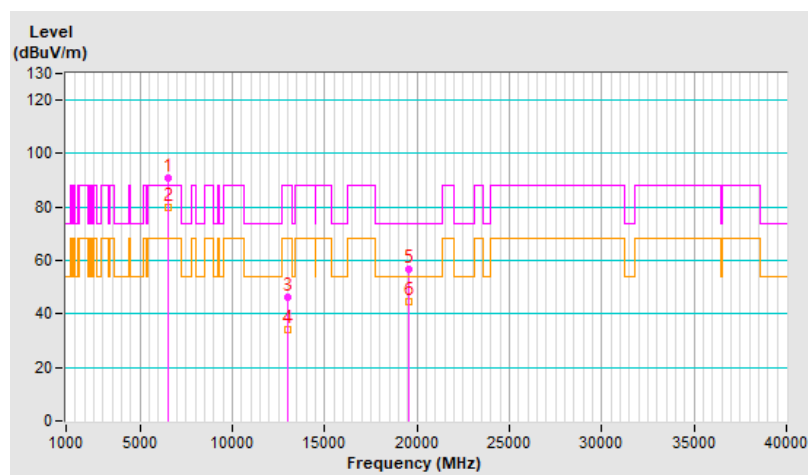


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.5 PK			1.74 V	81	97.3	7.2
2	*6505.00	93.8 AV			1.74 V	81	86.6	7.2
3	#13010.00	46.8 PK	88.2	-41.4	1.71 V	6	31.9	14.9
4	#13010.00	34.5 AV	68.2	-33.7	1.71 V	6	19.6	14.9
5	19515.00	56.6 PK	74.0	-17.4	1.73 V	41	61.3	-4.7
6	19515.00	44.5 AV	54.0	-9.5	1.73 V	41	49.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

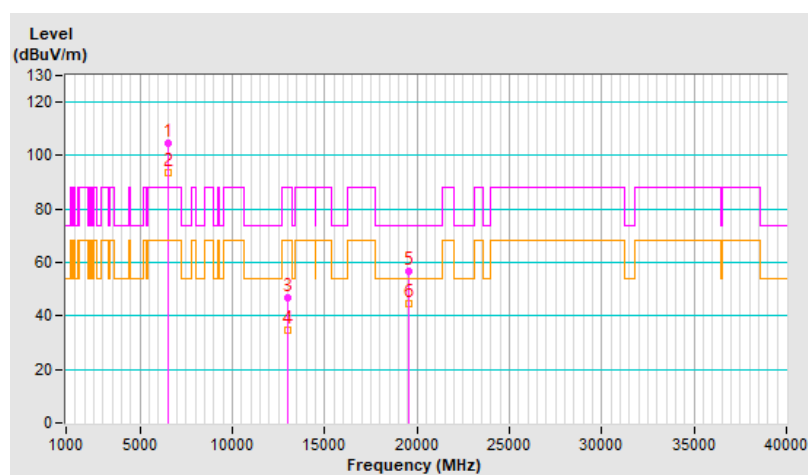


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	91.0 PK			2.47 H	130	83.0	8.0
2	*6825.00	79.9 AV			2.47 H	130	71.9	8.0
3	#13650.00	46.3 PK	88.2	-41.9	1.70 H	19	30.2	16.1
4	#13650.00	34.1 AV	68.2	-34.1	1.70 H	19	18.0	16.1
5	20475.00	56.8 PK	74.0	-17.2	1.71 H	50	60.4	-3.6
6	20475.00	44.4 AV	54.0	-9.6	1.71 H	50	48.0	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

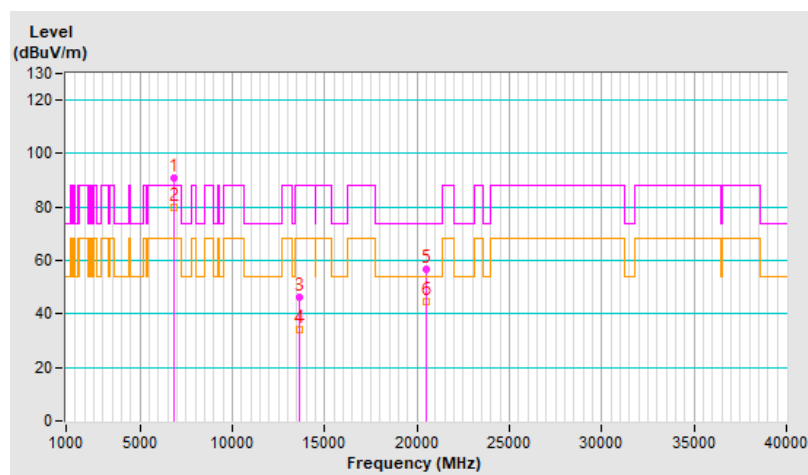


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	104.3 PK			1.73 V	81	96.3	8.0
2	*6825.00	93.3 AV			1.73 V	81	85.3	8.0
3	#13650.00	46.0 PK	88.2	-42.2	1.71 V	18	29.9	16.1
4	#13650.00	34.0 AV	68.2	-34.2	1.71 V	18	17.9	16.1
5	20475.00	57.4 PK	74.0	-16.6	1.71 V	48	61.0	-3.6
6	20475.00	44.8 AV	54.0	-9.2	1.71 V	48	48.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

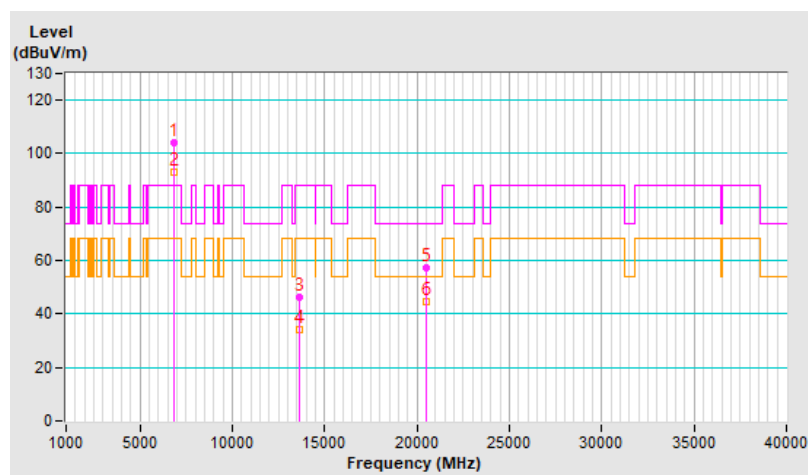


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	90.5 PK			1.05 H	237	81.6	8.9
2	*6985.00	80.1 AV			1.05 H	237	71.2	8.9
3	#7125.00	56.8 PK	88.2	-31.4	1.05 H	237	46.7	10.1
4	#7125.00	44.4 AV	68.2	-23.8	1.05 H	237	34.3	10.1
5	#13970.00	46.8 PK	88.2	-41.4	1.61 H	7	29.5	17.3
6	#13970.00	34.3 AV	68.2	-33.9	1.61 H	7	17.0	17.3
7	20955.00	57.3 PK	74.0	-16.7	1.71 H	23	60.7	-3.4
8	20955.00	45.1 AV	54.0	-8.9	1.71 H	23	48.5	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

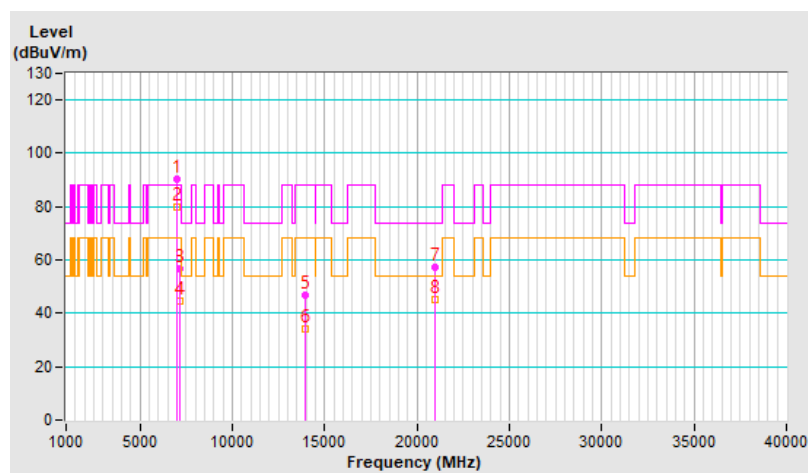


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.4 PK			1.70 V	83	93.5	8.9
2	*6985.00	92.8 AV			1.70 V	83	83.9	8.9
3	#7125.00	63.4 PK	88.2	-24.8	1.70 V	83	53.3	10.1
4	#7125.00	49.9 AV	68.2	-18.3	1.70 V	83	39.8	10.1
5	#13970.00	46.8 PK	88.2	-41.4	1.67 V	20	29.5	17.3
6	#13970.00	34.7 AV	68.2	-33.5	1.67 V	20	17.4	17.3
7	20955.00	57.0 PK	74.0	-17.0	1.70 V	19	60.4	-3.4
8	20955.00	44.8 AV	54.0	-9.2	1.70 V	19	48.2	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

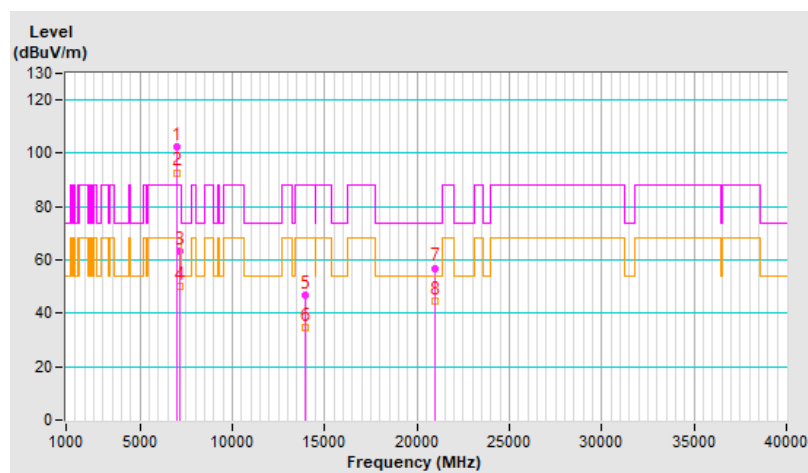


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.3 PK	88.2	-35.9	1.26 H	261	46.7	5.6
2	#5925.00	40.7 AV	68.2	-27.5	1.26 H	261	35.1	5.6
3	*6025.00	87.3 PK			1.26 H	261	81.7	5.6
4	*6025.00	76.1 AV			1.26 H	261	70.5	5.6
5	12050.00	46.8 PK	74.0	-27.2	1.67 H	19	32.2	14.6
6	12050.00	34.5 AV	54.0	-19.5	1.67 H	19	19.9	14.6
7	18075.00	57.0 PK	74.0	-17.0	1.82 H	46	62.3	-5.3
8	18075.00	44.8 AV	54.0	-9.2	1.82 H	46	50.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

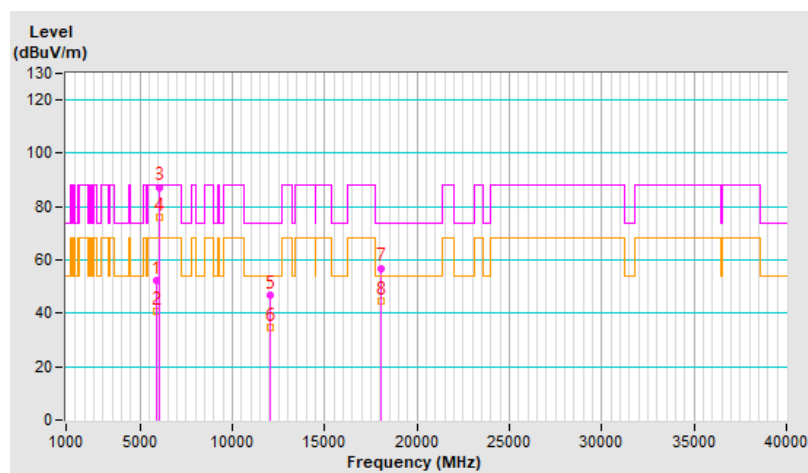


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.7 PK	88.2	-25.5	1.69 V	78	57.1	5.6
2	#5925.00	45.8 AV	68.2	-22.4	1.69 V	78	40.2	5.6
3	*6025.00	101.0 PK			1.69 V	78	95.4	5.6
4	*6025.00	89.7 AV			1.69 V	78	84.1	5.6
5	12050.00	46.7 PK	74.0	-27.3	1.69 V	11	32.1	14.6
6	12050.00	34.6 AV	54.0	-19.4	1.69 V	11	20.0	14.6
7	18075.00	57.2 PK	74.0	-16.8	1.82 V	31	62.5	-5.3
8	18075.00	45.1 AV	54.0	-8.9	1.82 V	31	50.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

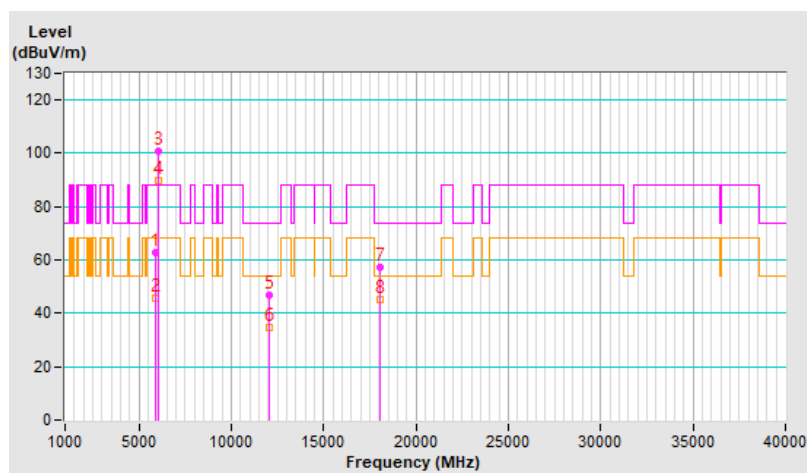


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	87.5 PK			1.23 H	246	81.7	5.8
2	*6185.00	76.5 AV			1.23 H	246	70.7	5.8
3	12370.00	46.2 PK	74.0	-27.8	1.63 H	11	31.5	14.7
4	12370.00	33.9 AV	54.0	-20.1	1.63 H	11	19.2	14.7
5	18555.00	57.7 PK	74.0	-16.3	1.74 H	36	63.1	-5.4
6	18555.00	45.2 AV	54.0	-8.8	1.74 H	36	50.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

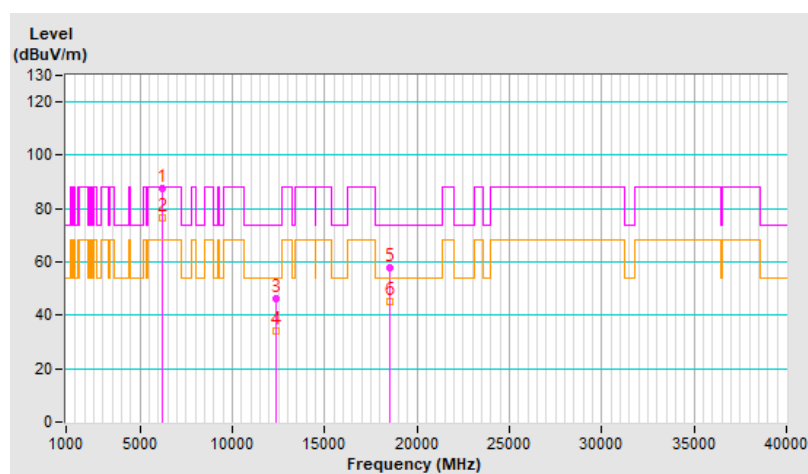


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	101.0 PK			1.70 V	70	95.2	5.8
2	*6185.00	89.4 AV			1.70 V	70	83.6	5.8
3	12370.00	47.0 PK	74.0	-27.0	1.69 V	3	32.3	14.7
4	12370.00	34.6 AV	54.0	-19.4	1.69 V	3	19.9	14.7
5	18555.00	57.4 PK	74.0	-16.6	1.75 V	47	62.8	-5.4
6	18555.00	45.2 AV	54.0	-8.8	1.75 V	47	50.6	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

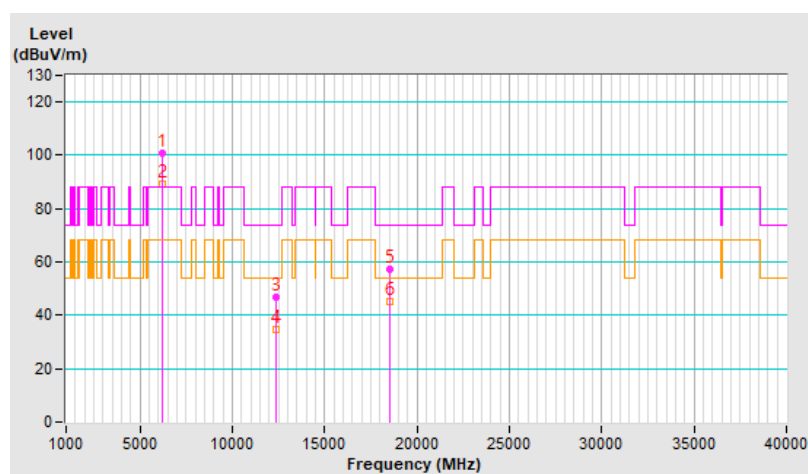


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	87.7 PK			1.21 H	248	81.3	6.4
2	*6345.00	76.5 AV			1.21 H	248	70.1	6.4
3	12690.00	46.7 PK	74.0	-27.3	1.71 H	10	31.8	14.9
4	12690.00	34.6 AV	54.0	-19.4	1.71 H	10	19.7	14.9
5	19035.00	56.7 PK	74.0	-17.3	1.72 H	44	61.6	-4.9
6	19035.00	44.4 AV	54.0	-9.6	1.72 H	44	49.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

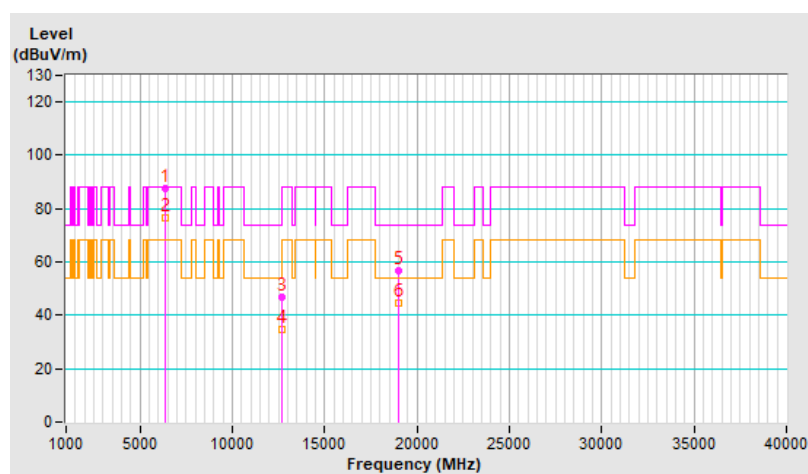


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	101.1 PK			1.70 V	91	94.7	6.4
2	*6345.00	89.7 AV			1.70 V	91	83.3	6.4
3	12690.00	46.1 PK	74.0	-27.9	1.64 V	19	31.2	14.9
4	12690.00	33.9 AV	54.0	-20.1	1.64 V	19	19.0	14.9
5	19035.00	56.8 PK	74.0	-17.2	1.75 V	46	61.7	-4.9
6	19035.00	44.6 AV	54.0	-9.4	1.75 V	46	49.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

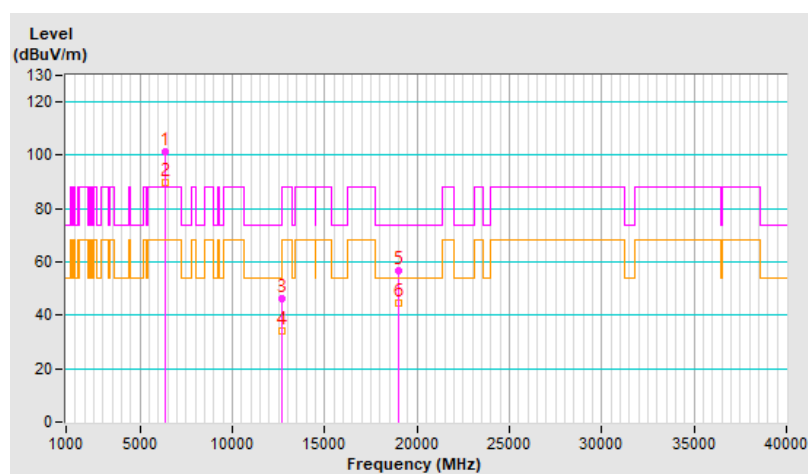


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	87.8 PK			1.29 H	250	80.6	7.2
2	*6505.00	76.4 AV			1.29 H	250	69.2	7.2
3	#13010.00	46.5 PK	88.2	-41.7	1.61 H	20	31.6	14.9
4	#13010.00	34.4 AV	68.2	-33.8	1.61 H	20	19.5	14.9
5	19515.00	57.0 PK	74.0	-17.0	1.73 H	34	61.7	-4.7
6	19515.00	44.9 AV	54.0	-9.1	1.73 H	34	49.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

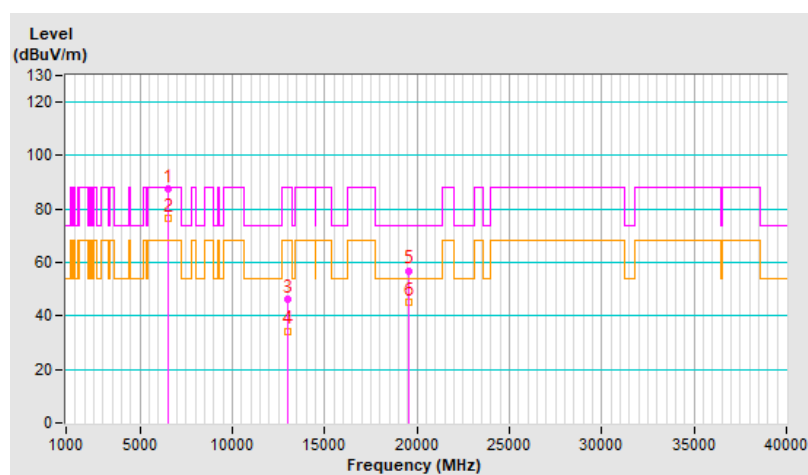


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.7 PK			1.67 V	78	93.5	7.2
2	*6505.00	89.4 AV			1.67 V	78	82.2	7.2
3	#13010.00	46.3 PK	88.2	-41.9	1.71 V	18	31.4	14.9
4	#13010.00	33.9 AV	68.2	-34.3	1.71 V	18	19.0	14.9
5	19515.00	57.5 PK	74.0	-16.5	1.75 V	23	62.2	-4.7
6	19515.00	45.0 AV	54.0	-9.0	1.75 V	23	49.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

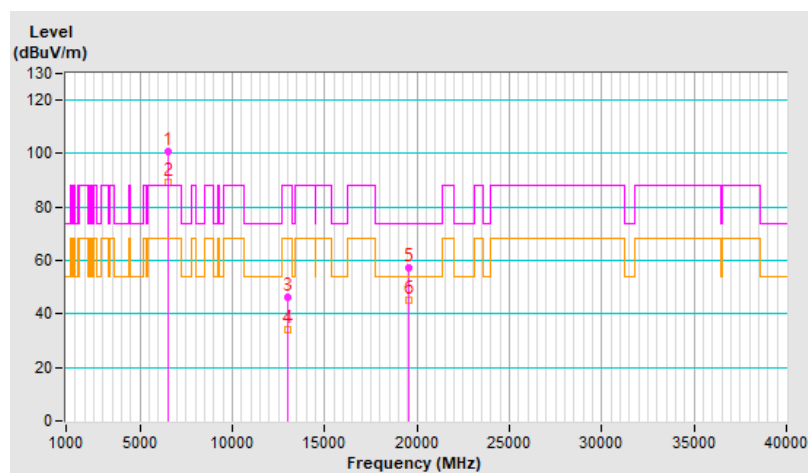


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	87.3 PK			1.21 H	247	79.3	8.0
2	*6825.00	75.9 AV			1.21 H	247	67.9	8.0
3	#13650.00	46.0 PK	88.2	-42.2	1.66 H	16	29.9	16.1
4	#13650.00	33.9 AV	68.2	-34.3	1.66 H	16	17.8	16.1
5	20475.00	56.9 PK	74.0	-17.1	1.73 H	30	60.5	-3.6
6	20475.00	44.6 AV	54.0	-9.4	1.73 H	30	48.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

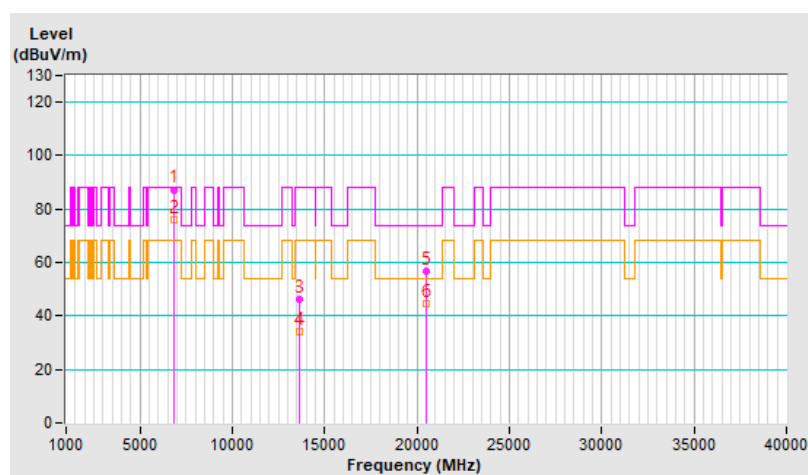


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	100.6 PK			1.67 V	88	92.6	8.0
2	*6825.00	89.6 AV			1.67 V	88	81.6	8.0
3	#13650.00	46.7 PK	88.2	-41.5	1.69 V	13	30.6	16.1
4	#13650.00	34.4 AV	68.2	-33.8	1.69 V	13	18.3	16.1
5	20475.00	56.4 PK	74.0	-17.6	1.76 V	21	60.0	-3.6
6	20475.00	44.4 AV	54.0	-9.6	1.76 V	21	48.0	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

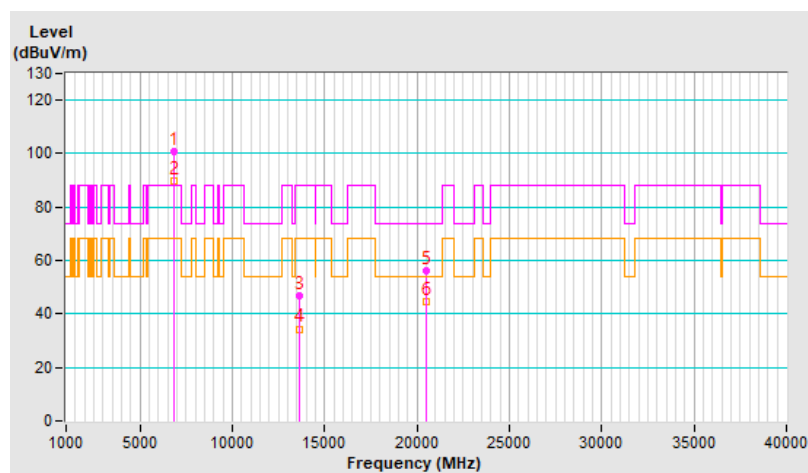


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	94.4 PK			3.04 H	130	85.5	8.9
2	*6985.00	78.9 AV			3.04 H	130	70.0	8.9
3	#7125.00	61.0 PK	88.2	-27.2	3.04 H	130	50.9	10.1
4	#7125.00	44.8 AV	68.2	-23.4	3.04 H	130	34.7	10.1
5	#13970.00	46.0 PK	88.2	-42.2	1.70 H	5	28.7	17.3
6	#13970.00	34.1 AV	68.2	-34.1	1.70 H	5	16.8	17.3
7	20955.00	57.5 PK	74.0	-16.5	1.78 H	47	60.9	-3.4
8	20955.00	45.1 AV	54.0	-8.9	1.78 H	47	48.5	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

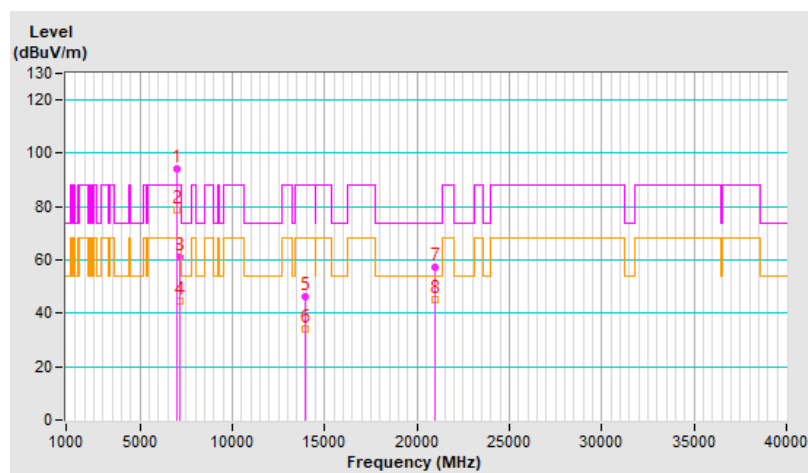


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	101.8 PK			1.52 V	82	92.9	8.9
2	*6985.00	89.8 AV			1.52 V	82	80.9	8.9
3	#7125.00	68.1 PK	88.2	-20.1	1.52 V	82	58.0	10.1
4	#7125.00	49.1 AV	68.2	-19.1	1.52 V	82	39.0	10.1
5	#13970.00	46.5 PK	88.2	-41.7	1.69 V	12	29.2	17.3
6	#13970.00	34.6 AV	68.2	-33.6	1.69 V	12	17.3	17.3
7	20955.00	57.4 PK	74.0	-16.6	1.76 V	50	60.8	-3.4
8	20955.00	45.0 AV	54.0	-9.0	1.76 V	50	48.4	-3.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

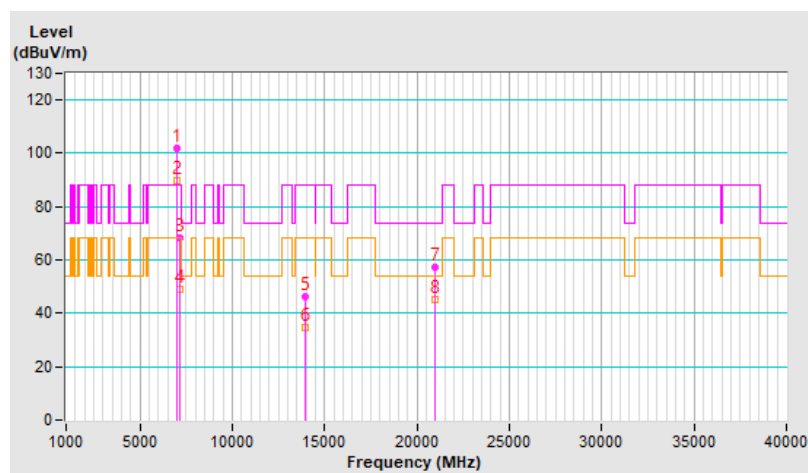


Plot of Band Edge


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 1

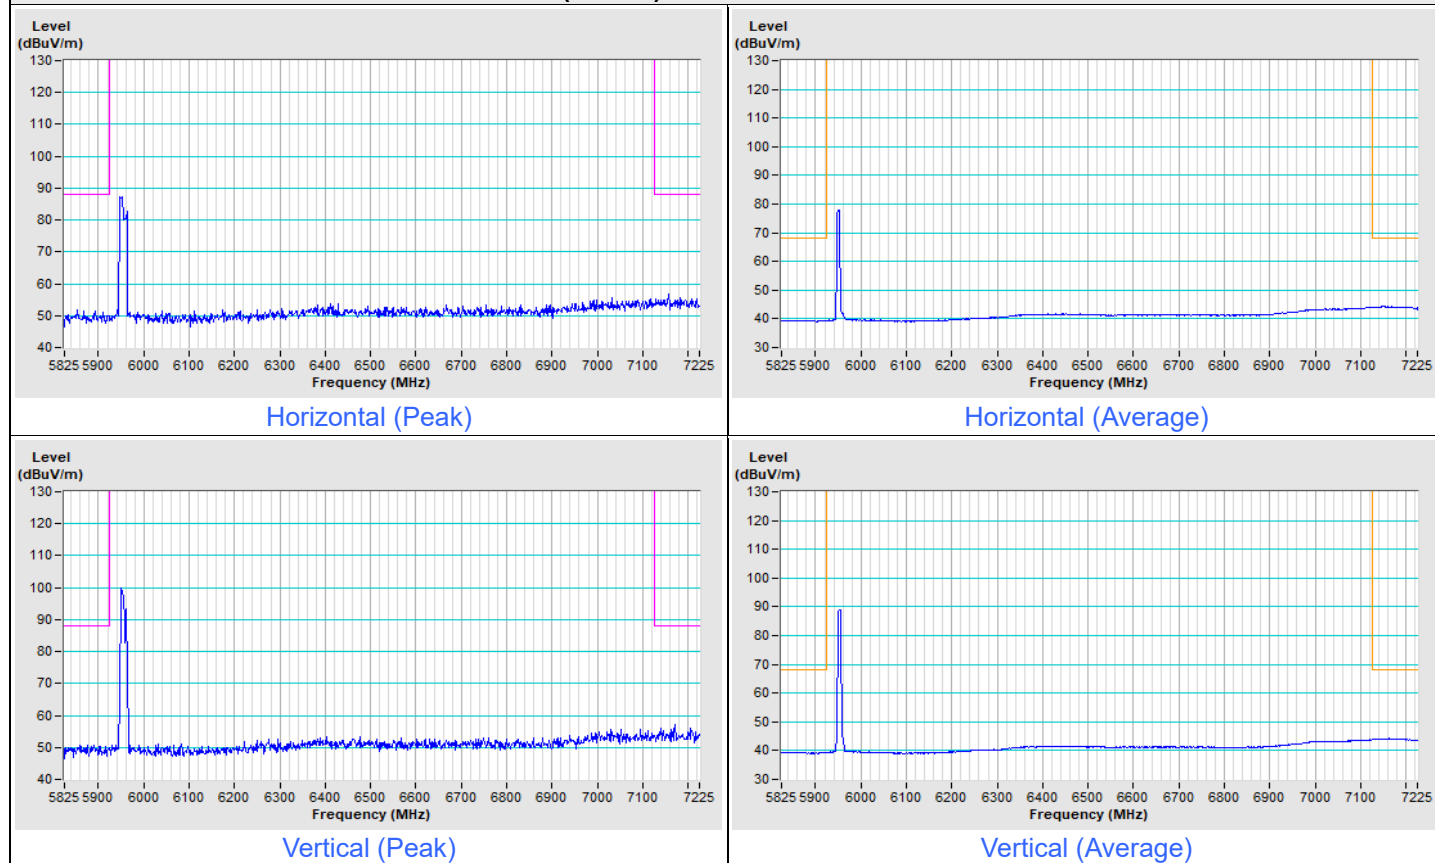


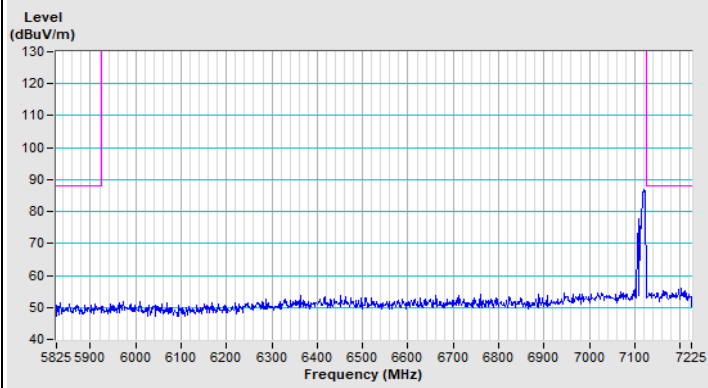802.11be (EHT20) 52+26-tone MRU Channel 233


Horizontal (Peak)

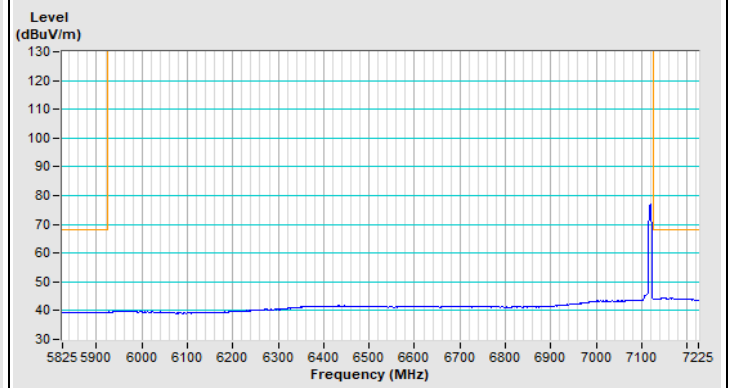

Horizontal (Average)

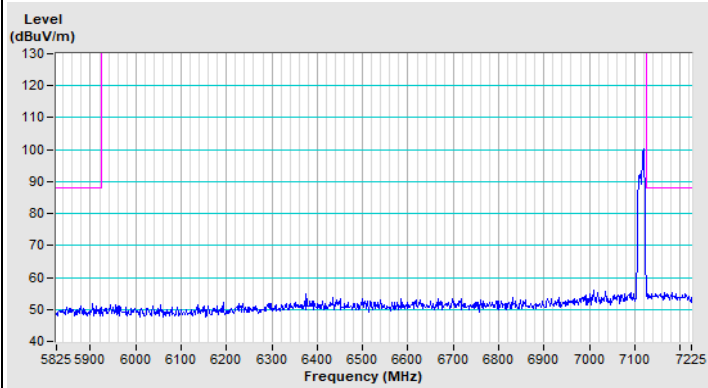


Vertical (Peak)

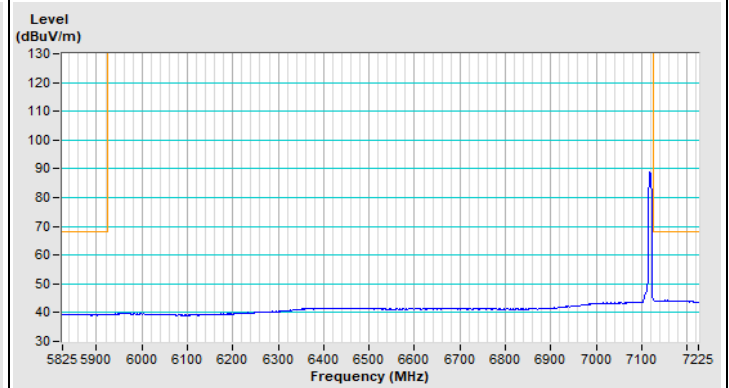


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

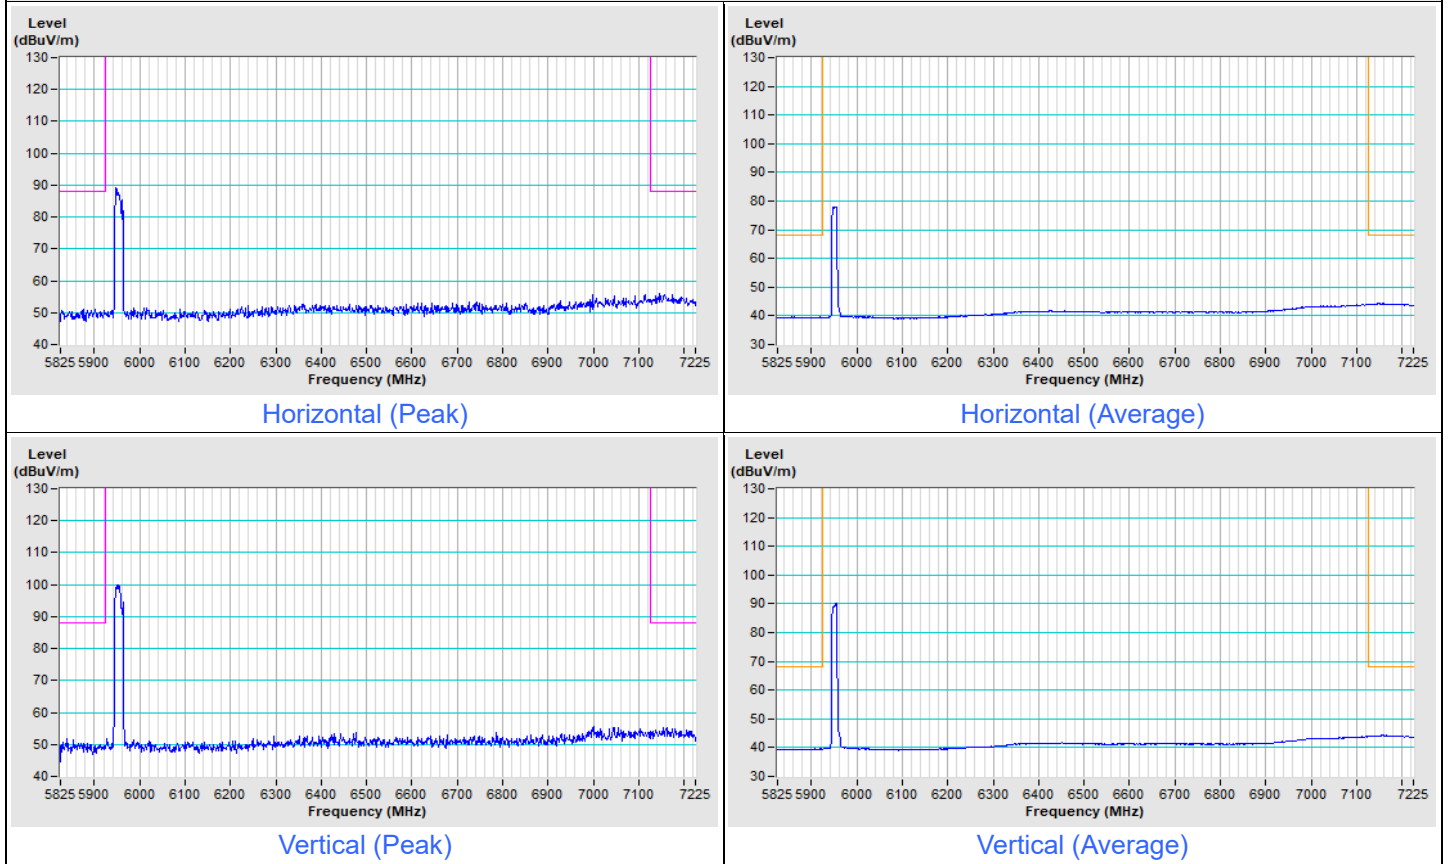


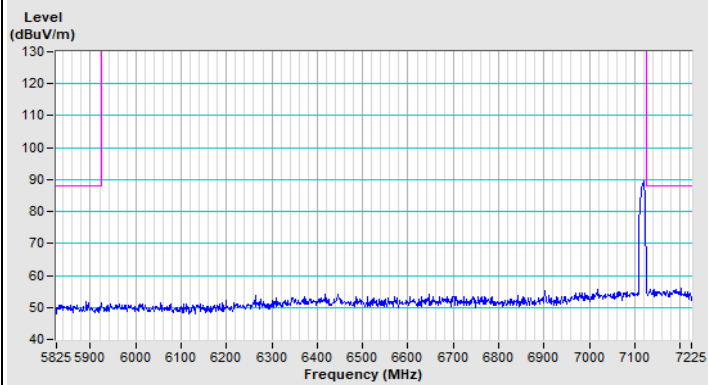802.11be (EHT20) 106+26-tone MRU Channel 233


Horizontal (Peak)

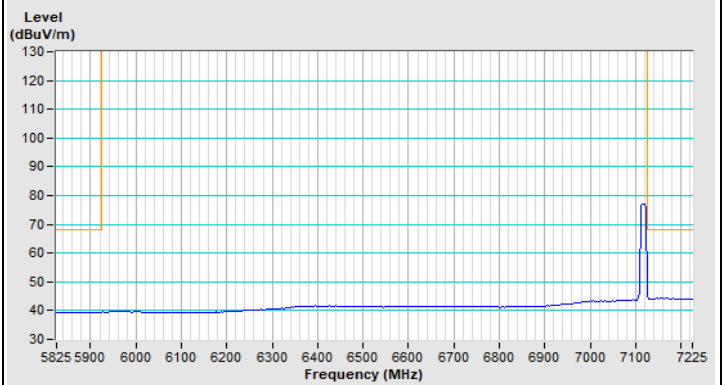

Horizontal (Average)

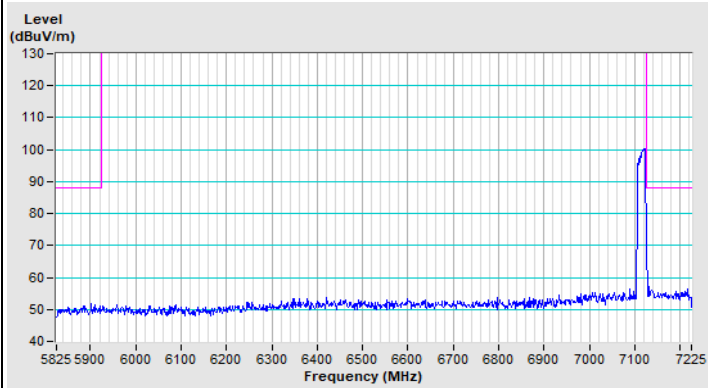


Vertical (Peak)

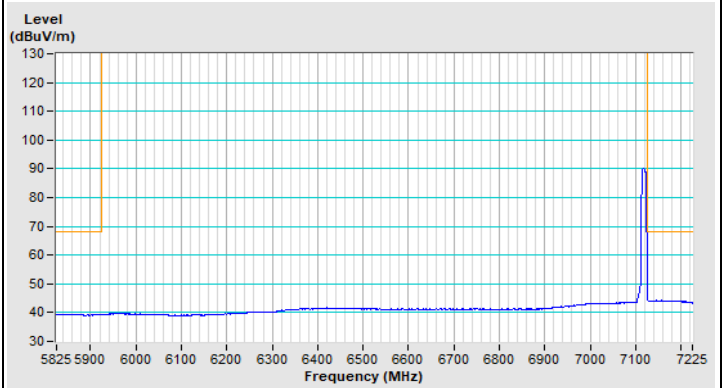


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

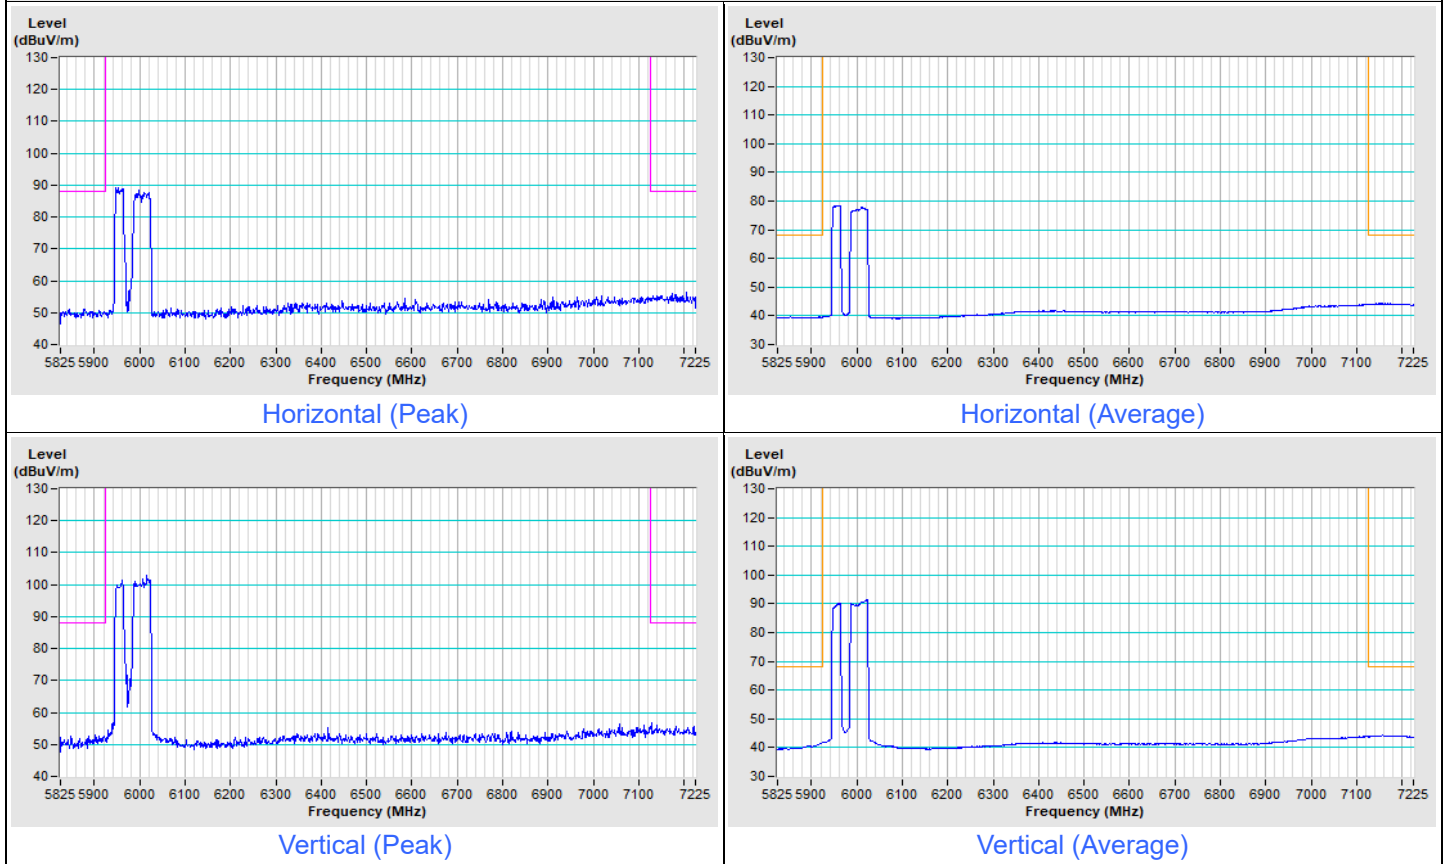


802.11be (EHT80) 484+242-tone MRU Channel 215

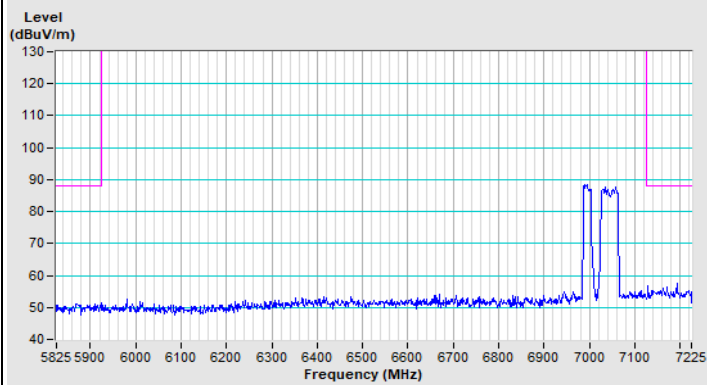


Horizontal (Peak)

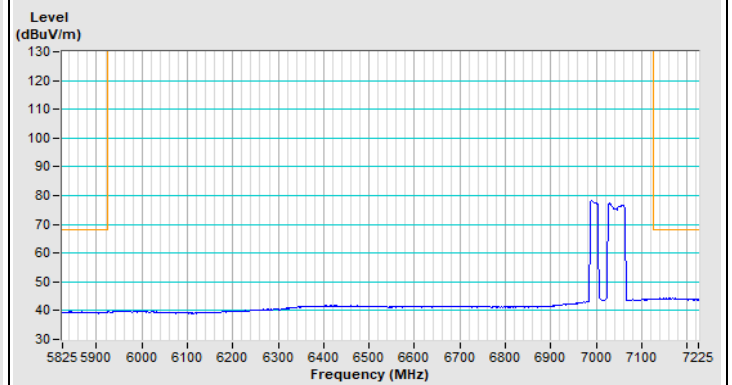

Horizontal (Average)

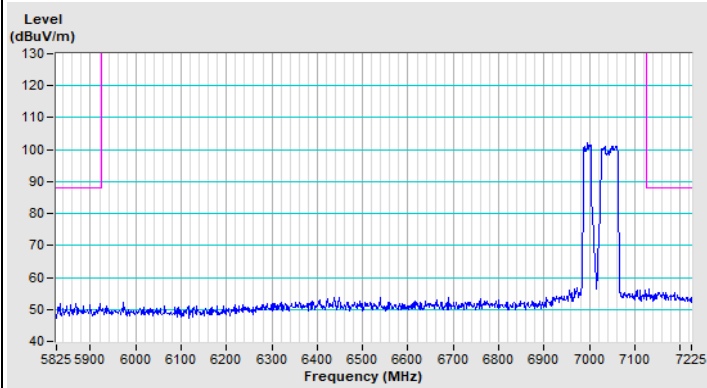


Vertical (Peak)

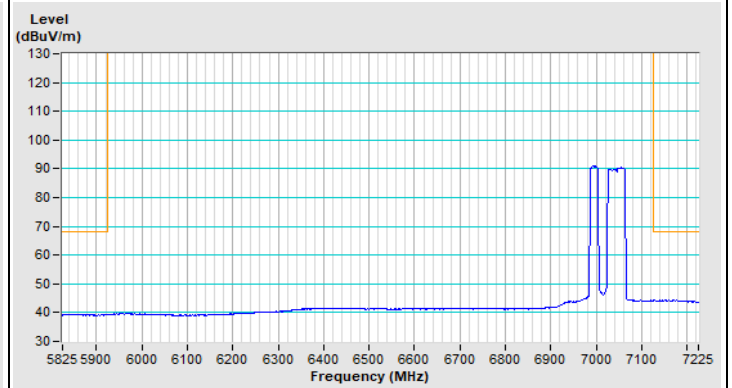


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

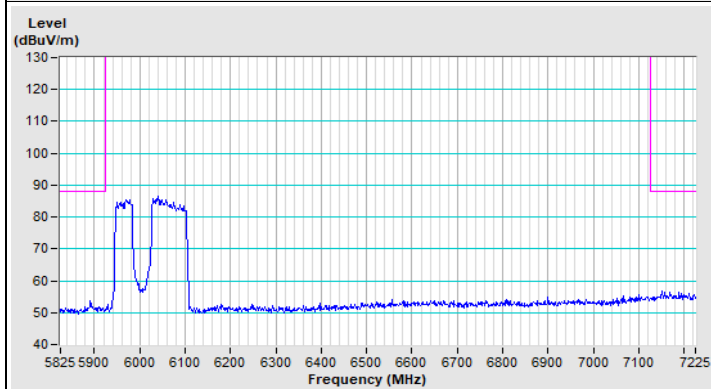


Horizontal (Peak)

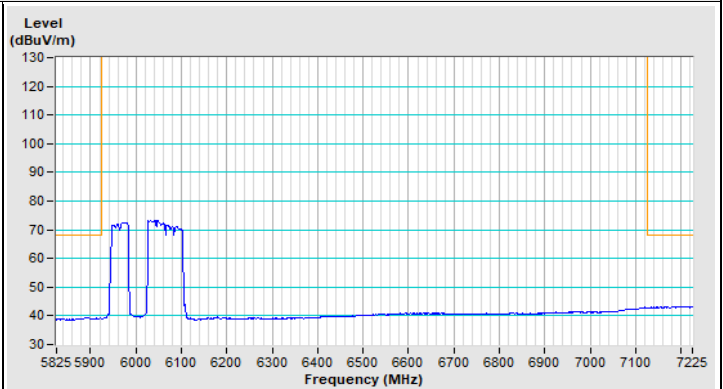

Horizontal (Average)

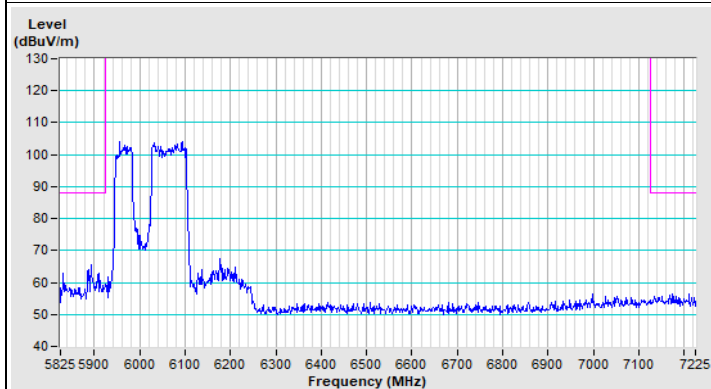


Vertical (Peak)

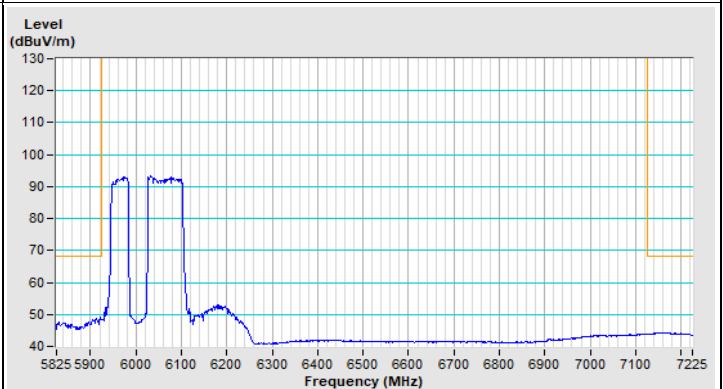


Vertical (Average)


802.11be (EHT160) 996+484-tone MRU Channel 207

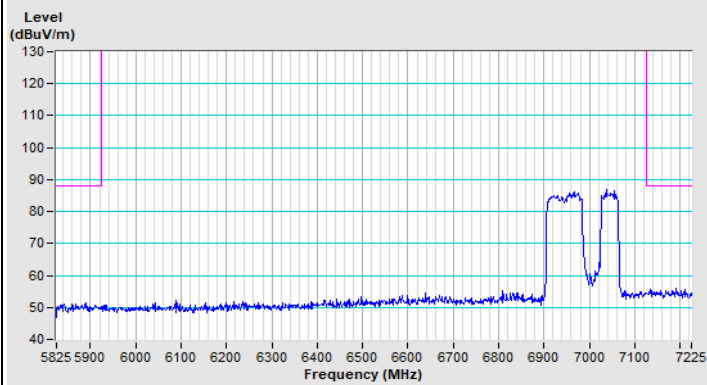


Horizontal (Peak)

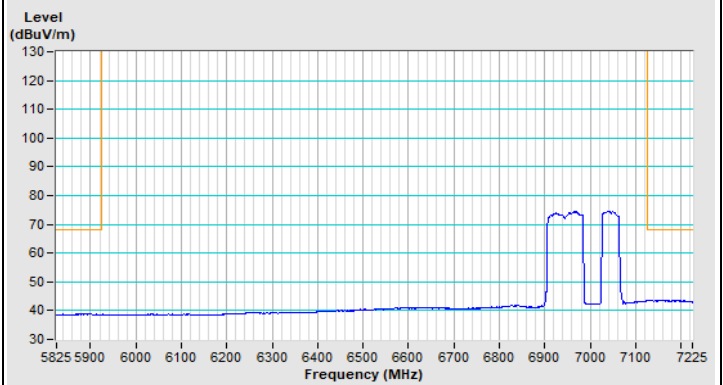

Horizontal (Average)

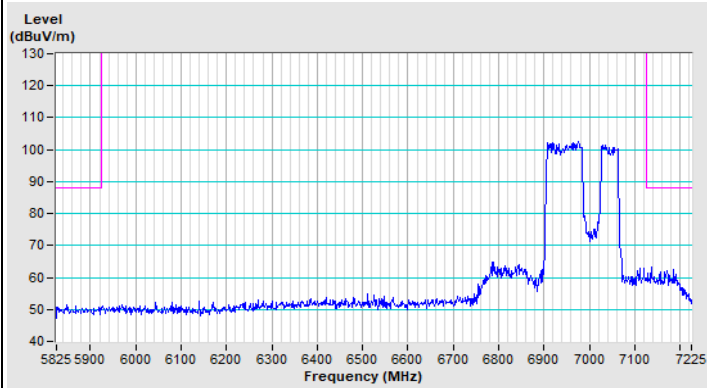


Vertical (Peak)

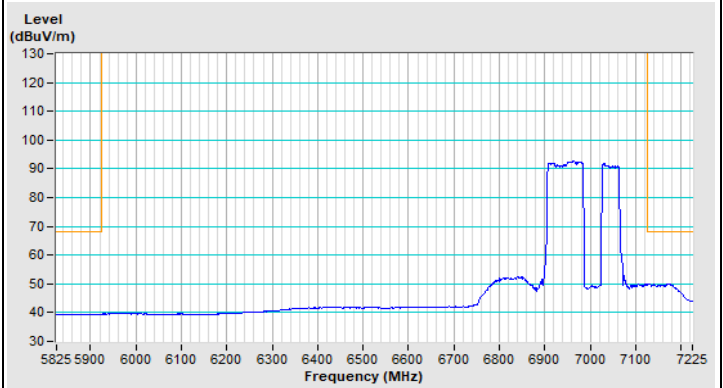


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

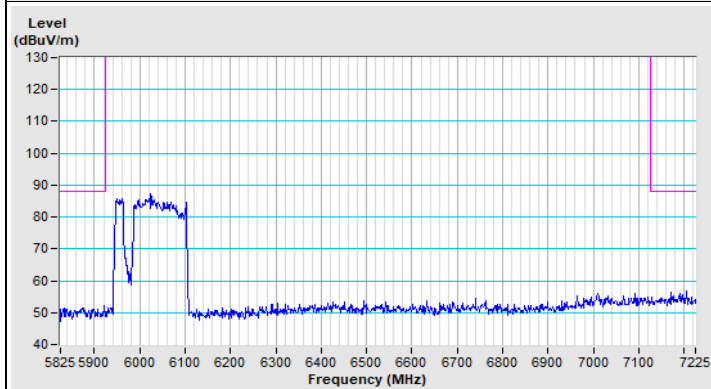


Horizontal (Peak)

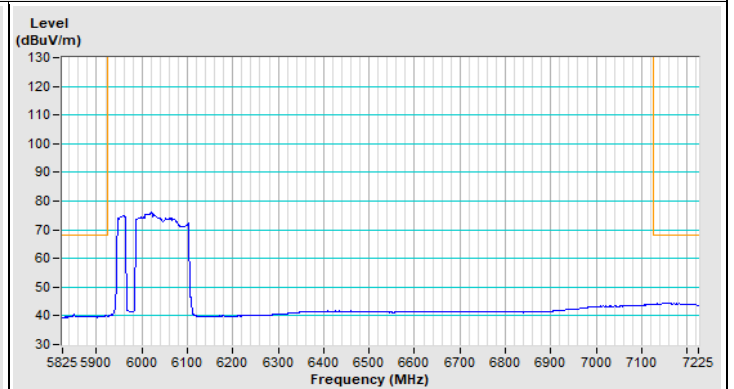

Horizontal (Average)

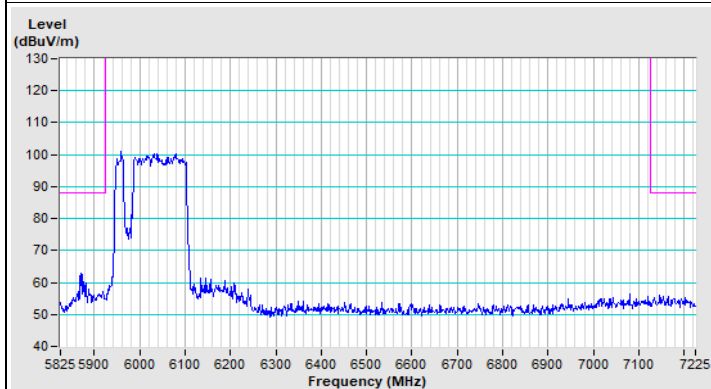


Vertical (Peak)

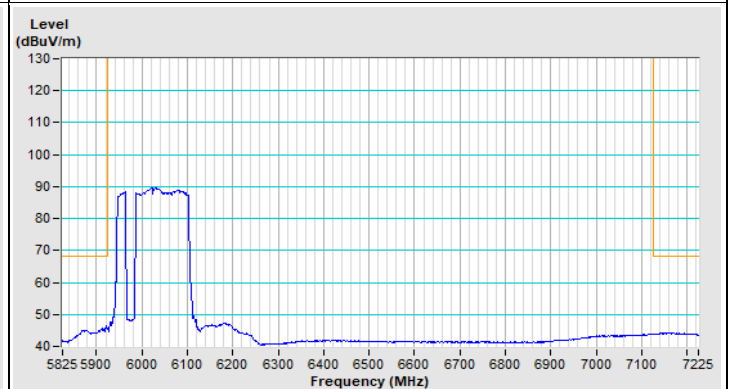


Vertical (Average)


802.11be (EHT160) 996+484+242-tone MRU Channel 207

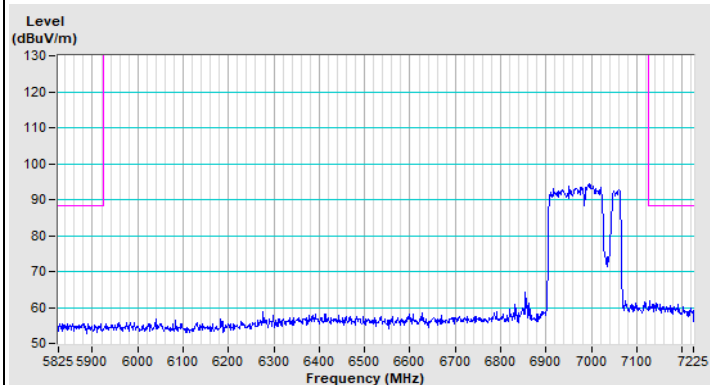


Horizontal (Peak)

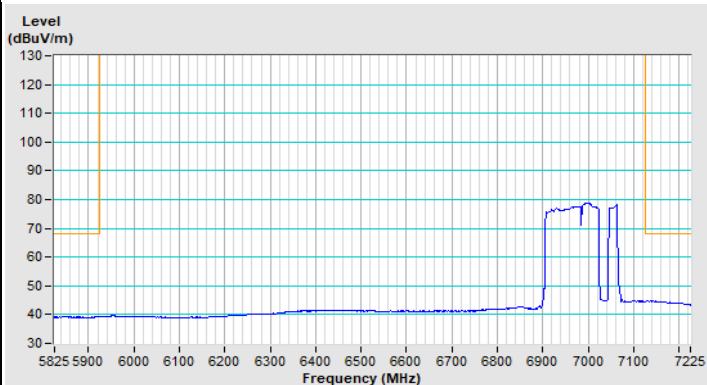

Horizontal (Average)

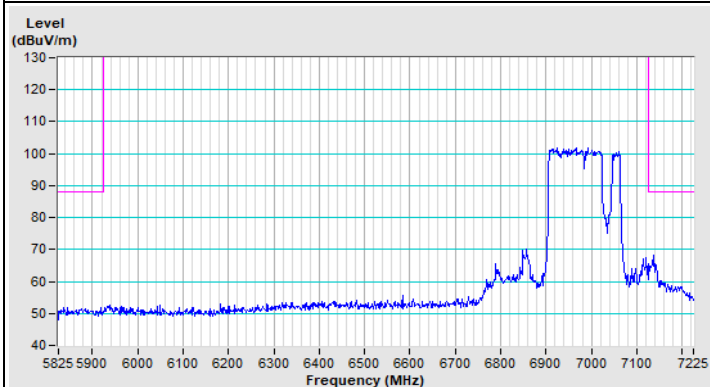

Vertical (Peak)

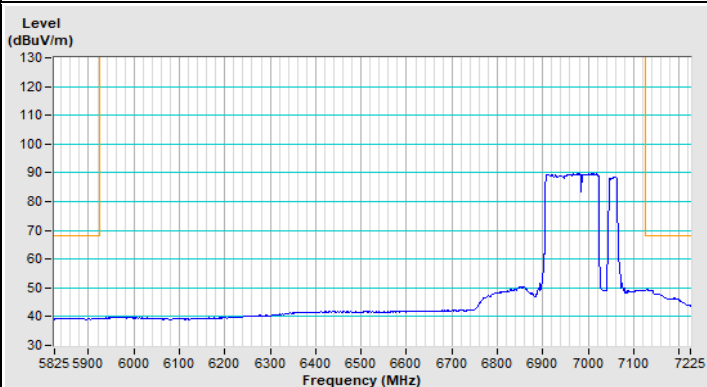

Vertical (Average)

under control of a Standard power AP


Mode A_1TX

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.7 PK	88.2	-32.5	1.93 H	177	50.1	5.6
2	#5925.00	45.8 AV	68.2	-22.4	1.93 H	177	40.2	5.6
3	*5955.00	117.2 PK			1.93 H	177	111.7	5.5
4	*5955.00	107.7 AV			1.93 H	177	102.2	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.53 H	77	32.1	14.6
6	11910.00	34.8 AV	54.0	-19.2	1.53 H	77	20.2	14.6
7	17865.00	55.6 PK	74.0	-18.4	1.93 H	360	29.7	25.9
8	17865.00	46.9 AV	54.0	-7.1	1.93 H	360	21.0	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

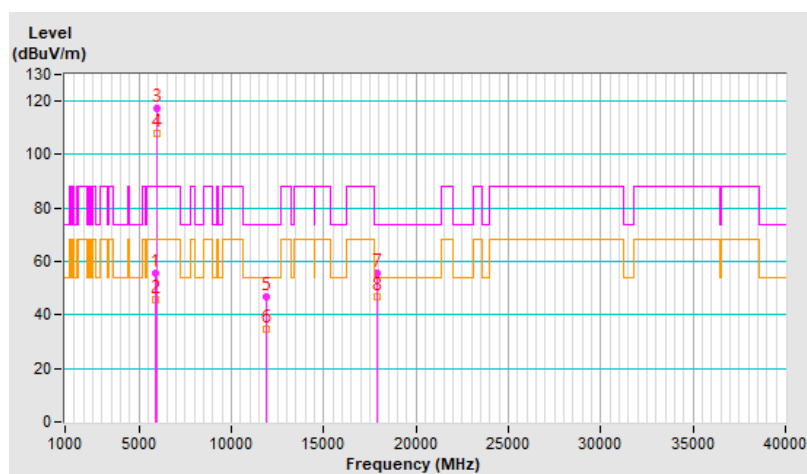


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.6 PK	88.2	-35.6	1.00 V	234	47.0	5.6
2	#5925.00	42.2 AV	68.2	-26.0	1.00 V	234	36.6	5.6
3	*5955.00	112.7 PK			1.00 V	234	107.2	5.5
4	*5955.00	102.2 AV			1.00 V	234	96.7	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.01 V	253	32.1	14.6
6	11910.00	35.1 AV	54.0	-18.9	1.01 V	253	20.5	14.6
7	17865.00	56.1 PK	74.0	-17.9	2.21 V	166	30.2	25.9
8	17865.00	45.2 AV	54.0	-8.8	2.21 V	166	19.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

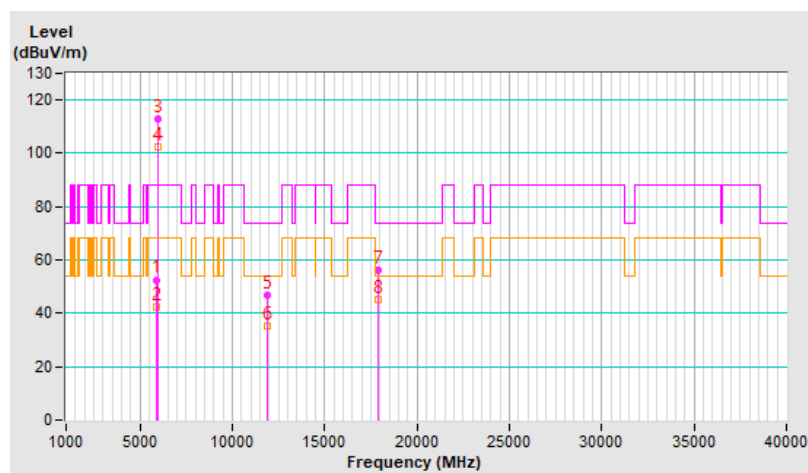


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.2 PK			1.91 H	182	110.4	6.8
2	*6415.00	107.7 AV			1.91 H	182	100.9	6.8
3	#12830.00	46.8 PK	88.2	-41.4	1.48 H	99	31.7	15.1
4	#12830.00	34.8 AV	68.2	-33.4	1.48 H	99	19.7	15.1
5	19245.00	54.9 PK	74.0	-19.1	1.98 H	357	59.5	-4.6
6	19245.00	46.6 AV	54.0	-7.4	1.98 H	357	51.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

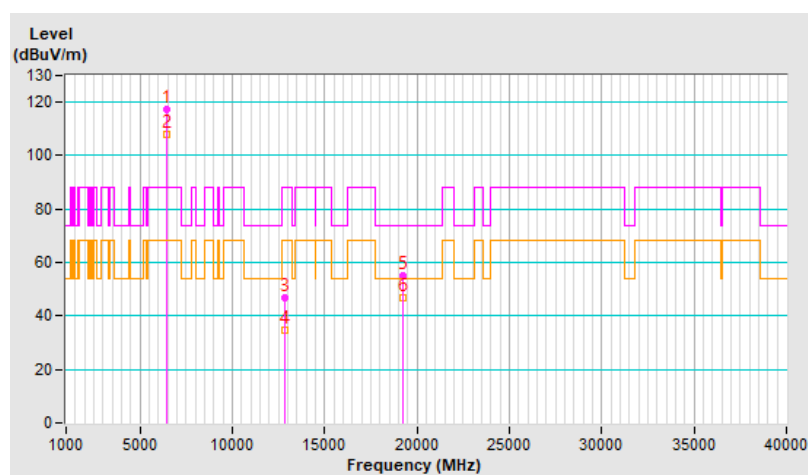


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.7 PK			1.04 V	240	105.9	6.8
2	*6415.00	102.5 AV			1.04 V	240	95.7	6.8
3	#12830.00	47.2 PK	88.2	-41.0	1.00 V	254	32.1	15.1
4	#12830.00	35.5 AV	68.2	-32.7	1.00 V	254	20.4	15.1
5	19245.00	55.8 PK	74.0	-18.2	2.21 V	167	60.4	-4.6
6	19245.00	44.9 AV	54.0	-9.1	2.21 V	167	49.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

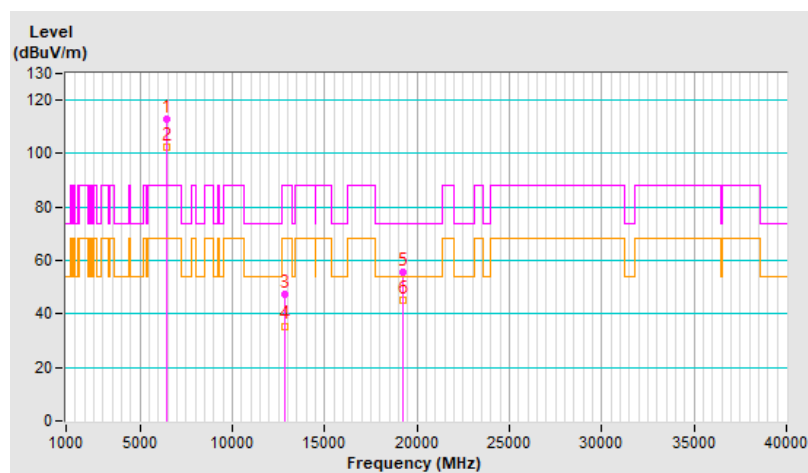


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.2 PK			1.97 H	162	109.8	7.4
2	*6535.00	107.7 AV			1.97 H	162	100.3	7.4
3	#13070.00	47.0 PK	88.2	-41.2	1.43 H	93	31.9	15.1
4	#13070.00	35.1 AV	68.2	-33.1	1.43 H	93	20.0	15.1
5	19605.00	55.7 PK	74.0	-18.3	1.92 H	360	60.5	-4.8
6	19605.00	46.9 AV	54.0	-7.1	1.92 H	360	51.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

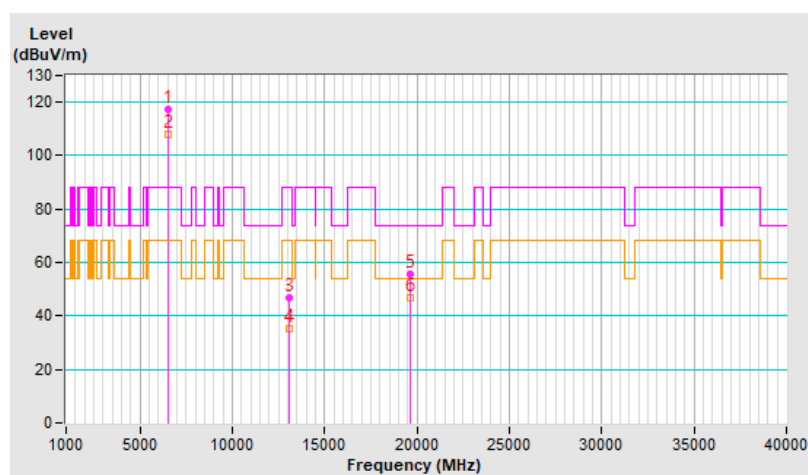


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.3 PK			1.00 V	244	105.9	7.4
2	*6535.00	102.6 AV			1.00 V	244	95.2	7.4
3	#13070.00	46.5 PK	88.2	-41.7	1.00 V	263	31.4	15.1
4	#13070.00	35.0 AV	68.2	-33.2	1.00 V	263	19.9	15.1
5	19605.00	56.5 PK	74.0	-17.5	2.19 V	151	61.3	-4.8
6	19605.00	45.3 AV	54.0	-8.7	2.19 V	151	50.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

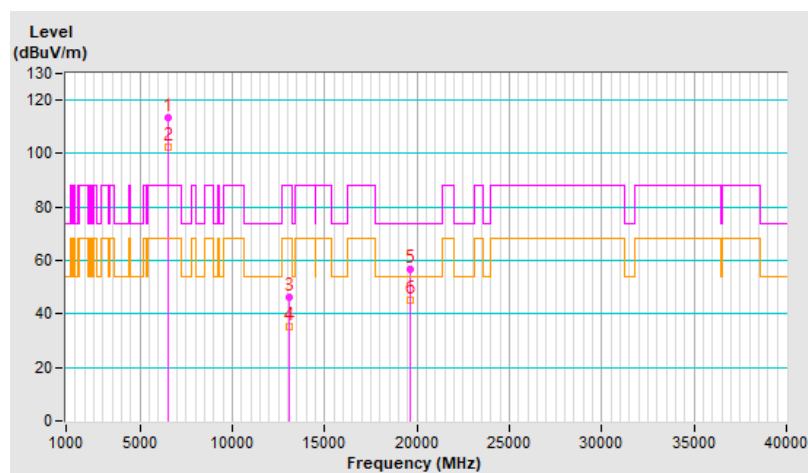


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.8 PK			1.73 H	175	106.6	8.2
2	*6855.00	104.5 AV			1.73 H	175	96.3	8.2
3	#13710.00	47.1 PK	88.2	-41.1	1.52 H	98	30.8	16.3
4	#13710.00	35.2 AV	68.2	-33.0	1.52 H	98	18.9	16.3
5	20565.00	55.8 PK	74.0	-18.2	1.91 H	357	59.5	-3.7
6	20565.00	47.1 AV	54.0	-6.9	1.91 H	357	50.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

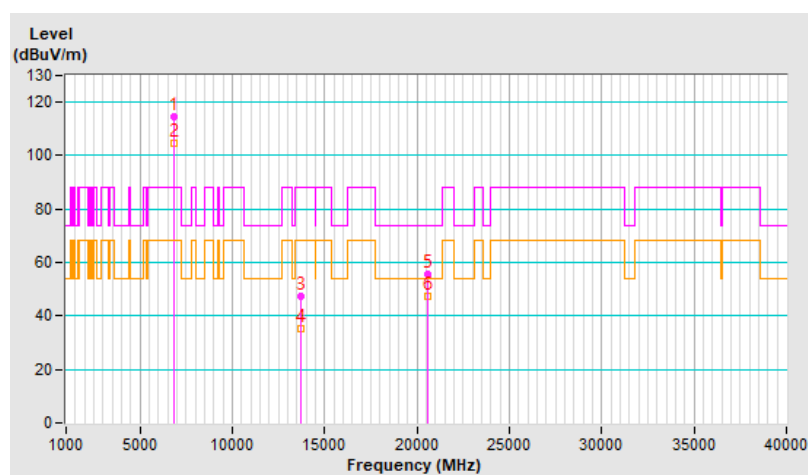


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.8 PK			1.68 V	51	101.6	8.2
2	*6855.00	99.0 AV			1.68 V	51	90.8	8.2
3	#13710.00	47.0 PK	88.2	-41.2	1.00 V	249	30.7	16.3
4	#13710.00	35.4 AV	68.2	-32.8	1.00 V	249	19.1	16.3
5	20565.00	56.1 PK	74.0	-17.9	2.24 V	152	59.8	-3.7
6	20565.00	45.0 AV	54.0	-9.0	2.24 V	152	48.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

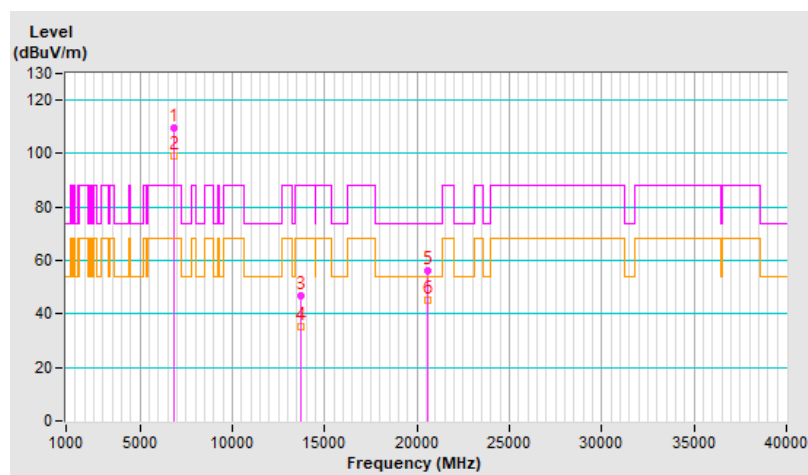


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.4 PK	88.2	-20.8	1.82 H	177	61.8	5.6
2	#5925.00	46.5 AV	68.2	-21.7	1.82 H	177	40.9	5.6
3	*5955.00	118.6 PK			1.82 H	177	113.1	5.5
4	*5955.00	107.4 AV			1.82 H	177	101.9	5.5
5	11910.00	47.0 PK	74.0	-27.0	1.52 H	77	32.4	14.6
6	11910.00	35.2 AV	54.0	-18.8	1.52 H	77	20.6	14.6
7	17865.00	54.9 PK	74.0	-19.1	1.95 H	360	29.0	25.9
8	17865.00	46.2 AV	54.0	-7.8	1.95 H	360	20.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

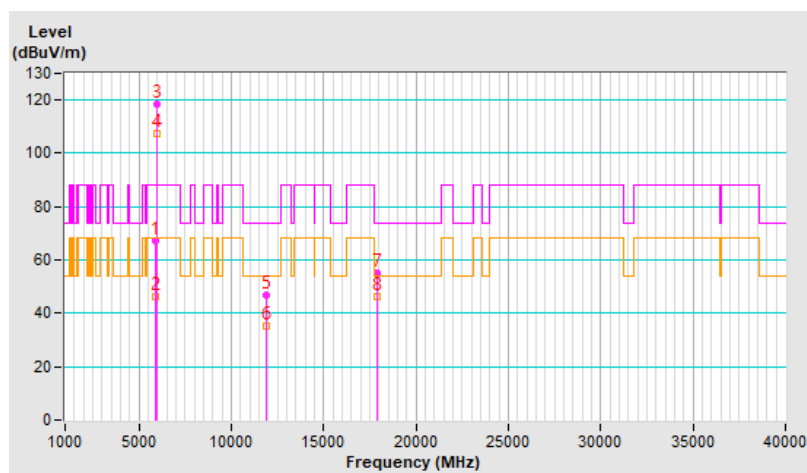


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.5 PK	88.2	-16.7	1.94 V	51	65.9	5.6
2	#5925.00	43.4 AV	68.2	-24.8	1.94 V	51	37.8	5.6
3	*5955.00	113.8 PK			1.94 V	51	108.3	5.5
4	*5955.00	102.8 AV			1.94 V	51	97.3	5.5
5	11910.00	46.5 PK	74.0	-27.5	1.00 V	242	31.9	14.6
6	11910.00	35.0 AV	54.0	-19.0	1.00 V	242	20.4	14.6
7	17865.00	55.8 PK	74.0	-18.2	2.20 V	171	29.9	25.9
8	17865.00	44.9 AV	54.0	-9.1	2.20 V	171	19.0	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

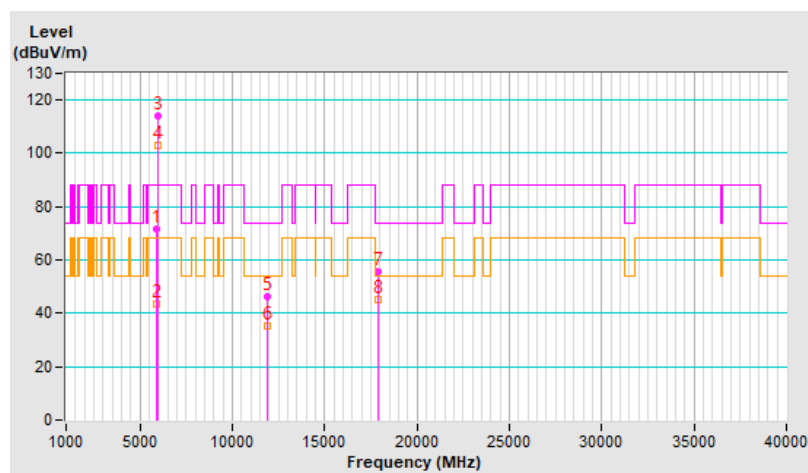


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.0 PK			1.81 H	166	112.2	6.8
2	*6415.00	107.5 AV			1.81 H	166	100.7	6.8
3	#12830.00	46.6 PK	88.2	-41.6	1.43 H	85	31.5	15.1
4	#12830.00	34.8 AV	68.2	-33.4	1.43 H	85	19.7	15.1
5	19245.00	55.1 PK	74.0	-18.9	2.01 H	360	59.7	-4.6
6	19245.00	46.7 AV	54.0	-7.3	2.01 H	360	51.3	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

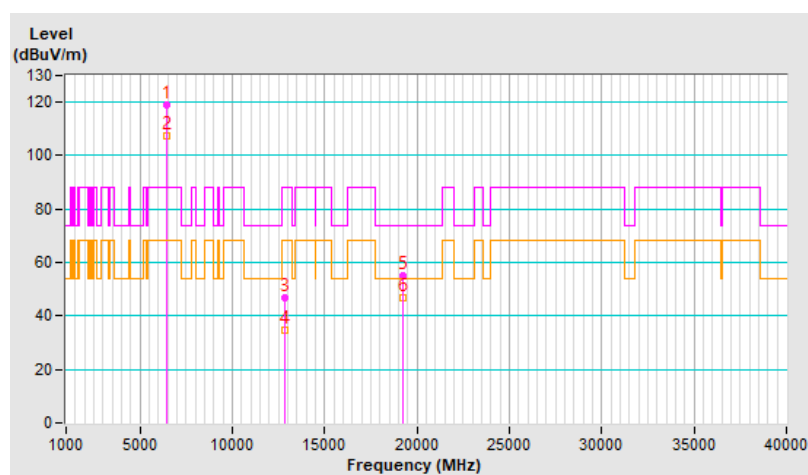


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.2 PK			1.05 V	227	105.4	6.8
2	*6415.00	101.8 AV			1.05 V	227	95.0	6.8
3	#12830.00	46.8 PK	88.2	-41.4	1.06 V	256	31.7	15.1
4	#12830.00	35.1 AV	68.2	-33.1	1.06 V	256	20.0	15.1
5	19245.00	56.1 PK	74.0	-17.9	2.18 V	177	60.7	-4.6
6	19245.00	45.0 AV	54.0	-9.0	2.18 V	177	49.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

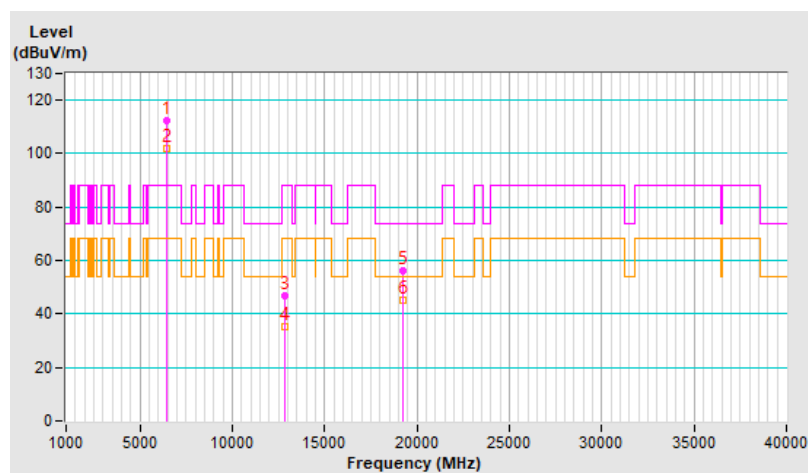


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.8 PK			1.79 H	165	111.4	7.4
2	*6535.00	107.7 AV			1.79 H	165	100.3	7.4
3	#13070.00	46.8 PK	88.2	-41.4	1.52 H	84	31.7	15.1
4	#13070.00	34.8 AV	68.2	-33.4	1.52 H	84	19.7	15.1
5	19605.00	54.9 PK	74.0	-19.1	1.94 H	360	59.7	-4.8
6	19605.00	46.3 AV	54.0	-7.7	1.94 H	360	51.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

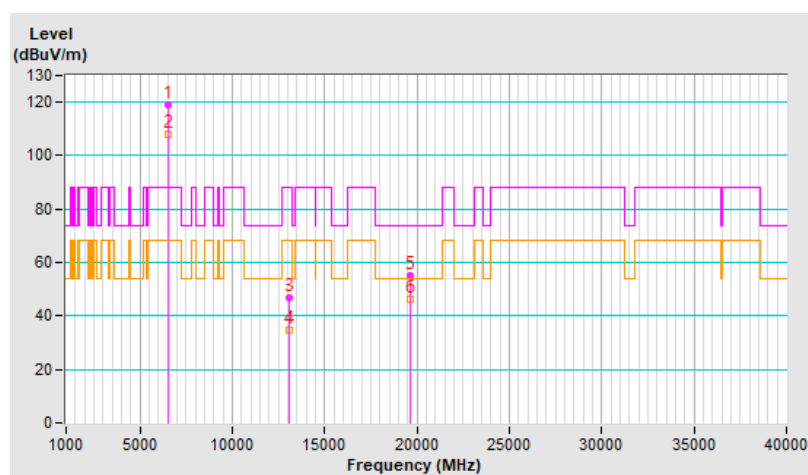


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.2 PK			1.01 V	242	105.8	7.4
2	*6535.00	102.6 AV			1.01 V	242	95.2	7.4
3	#13070.00	46.5 PK	88.2	-41.7	1.02 V	264	31.4	15.1
4	#13070.00	34.7 AV	68.2	-33.5	1.02 V	264	19.6	15.1
5	19605.00	56.1 PK	74.0	-17.9	2.16 V	169	60.9	-4.8
6	19605.00	45.1 AV	54.0	-8.9	2.16 V	169	49.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

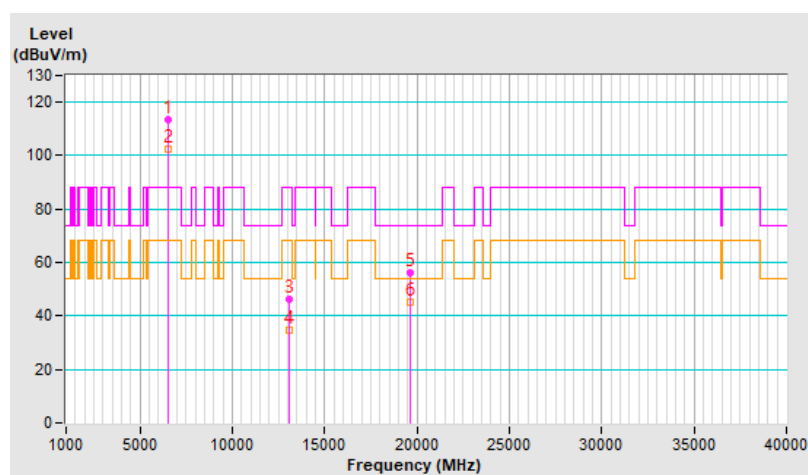


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.9 PK			1.72 H	177	106.7	8.2
2	*6855.00	103.7 AV			1.72 H	177	95.5	8.2
3	#13710.00	47.1 PK	88.2	-41.1	1.49 H	86	30.8	16.3
4	#13710.00	35.3 AV	68.2	-32.9	1.49 H	86	19.0	16.3
5	20565.00	54.8 PK	74.0	-19.2	1.94 H	354	58.5	-3.7
6	20565.00	46.6 AV	54.0	-7.4	1.94 H	354	50.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

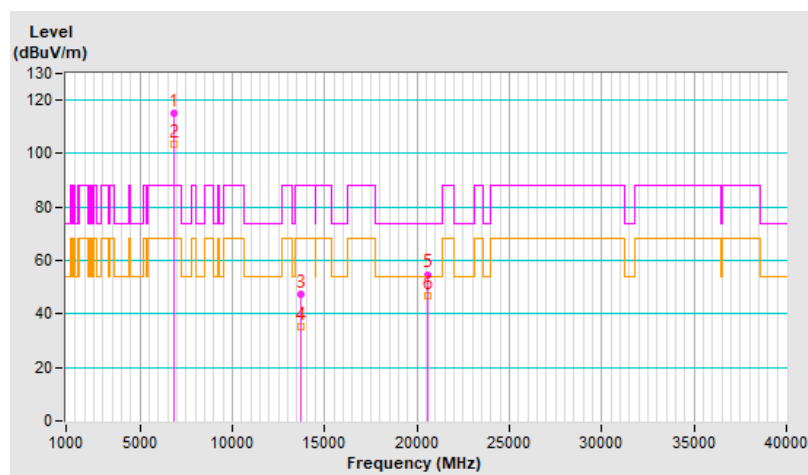


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.5 PK			1.84 V	322	99.3	8.2
2	*6855.00	97.9 AV			1.84 V	322	89.7	8.2
3	#13710.00	46.5 PK	88.2	-41.7	1.03 V	254	30.2	16.3
4	#13710.00	34.9 AV	68.2	-33.3	1.03 V	254	18.6	16.3
5	20565.00	56.3 PK	74.0	-17.7	2.25 V	155	60.0	-3.7
6	20565.00	45.1 AV	54.0	-8.9	2.25 V	155	48.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

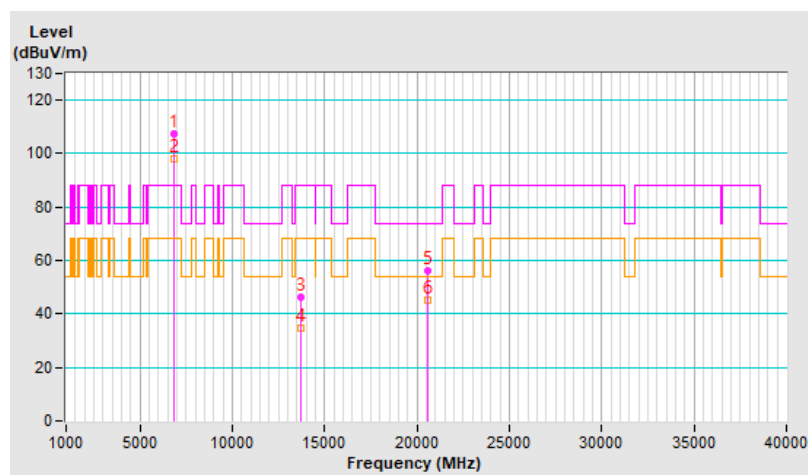


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.2 PK	88.2	-5.0	1.78 H	178	77.6	5.6
2	#5925.00	66.9 AV	68.2	-1.3	1.78 H	178	61.3	5.6
3	*5985.00	109.8 PK			1.78 H	178	104.3	5.5
4	*5985.00	98.6 AV			1.78 H	178	93.1	5.5
5	11970.00	47.4 PK	74.0	-26.6	1.47 H	87	32.9	14.5
6	11970.00	35.6 AV	54.0	-18.4	1.47 H	87	21.1	14.5
7	17955.00	54.5 PK	74.0	-19.5	2.00 H	360	26.2	28.3
8	17955.00	46.2 AV	54.0	-7.8	2.00 H	360	17.9	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

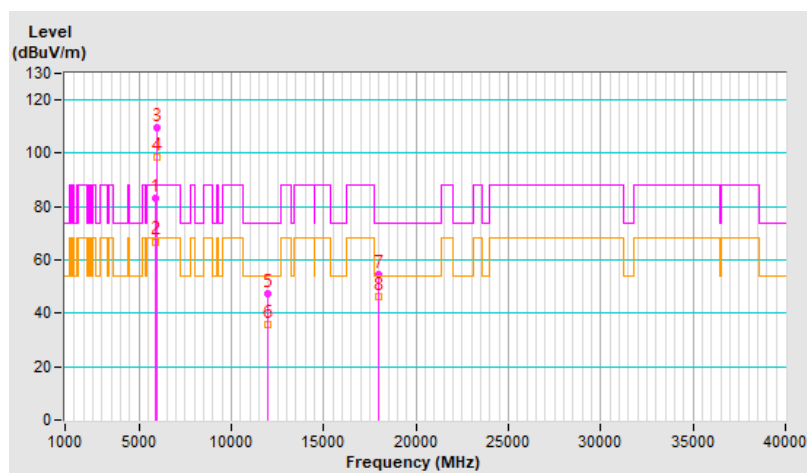


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.7 PK	88.2	-9.5	1.18 V	58	73.1	5.6
2	#5925.00	61.5 AV	68.2	-6.7	1.18 V	58	55.9	5.6
3	*5985.00	106.8 PK			1.18 V	58	101.3	5.5
4	*5985.00	95.8 AV			1.18 V	58	90.3	5.5
5	11970.00	46.3 PK	74.0	-27.7	1.00 V	241	31.8	14.5
6	11970.00	34.6 AV	54.0	-19.4	1.00 V	241	20.1	14.5
7	17955.00	56.3 PK	74.0	-17.7	2.26 V	152	28.0	28.3
8	17955.00	45.5 AV	54.0	-8.5	2.26 V	152	17.2	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

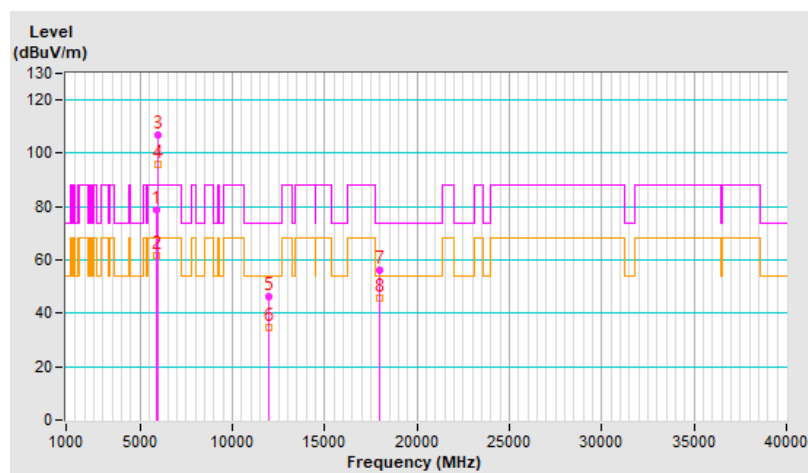


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.1 PK			1.78 H	189	103.5	6.6
2	*6385.00	99.0 AV			1.78 H	189	92.4	6.6
3	#12770.00	47.5 PK	88.2	-40.7	1.42 H	78	32.6	14.9
4	#12770.00	35.4 AV	68.2	-32.8	1.42 H	78	20.5	14.9
5	19155.00	55.9 PK	74.0	-18.1	1.96 H	360	60.6	-4.7
6	19155.00	47.1 AV	54.0	-6.9	1.96 H	360	51.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

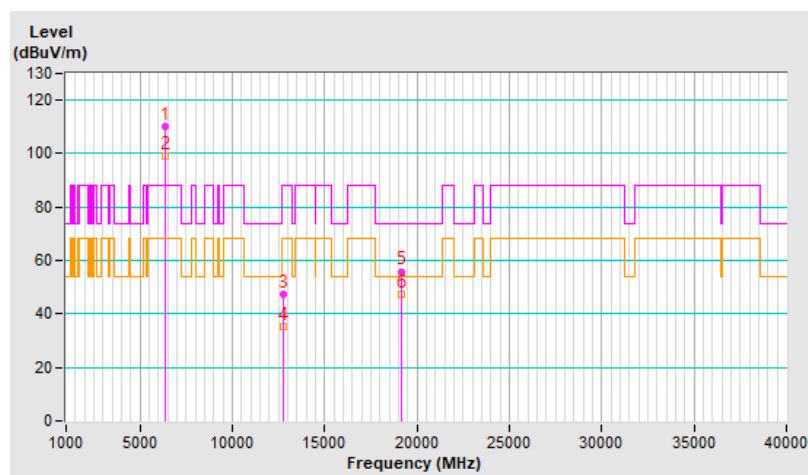


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.1 PK			1.00 V	226	106.5	6.6
2	*6385.00	102.4 AV			1.00 V	226	95.8	6.6
3	#12770.00	46.8 PK	88.2	-41.4	1.01 V	263	31.9	14.9
4	#12770.00	34.9 AV	68.2	-33.3	1.01 V	263	20.0	14.9
5	19155.00	56.5 PK	74.0	-17.5	2.15 V	161	61.2	-4.7
6	19155.00	45.7 AV	54.0	-8.3	2.15 V	161	50.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

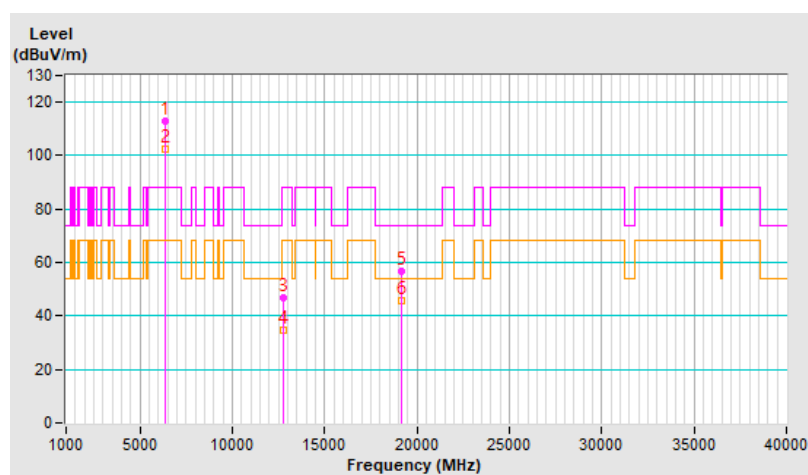


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.1 PK			1.80 H	176	101.3	7.8
2	*6625.00	98.2 AV			1.80 H	176	90.4	7.8
3	13250.00	47.2 PK	74.0	-26.8	1.42 H	97	31.8	15.4
4	13250.00	35.1 AV	54.0	-18.9	1.42 H	97	19.7	15.4
5	19875.00	55.6 PK	74.0	-18.4	1.94 H	360	60.1	-4.5
6	19875.00	47.0 AV	54.0	-7.0	1.94 H	360	51.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

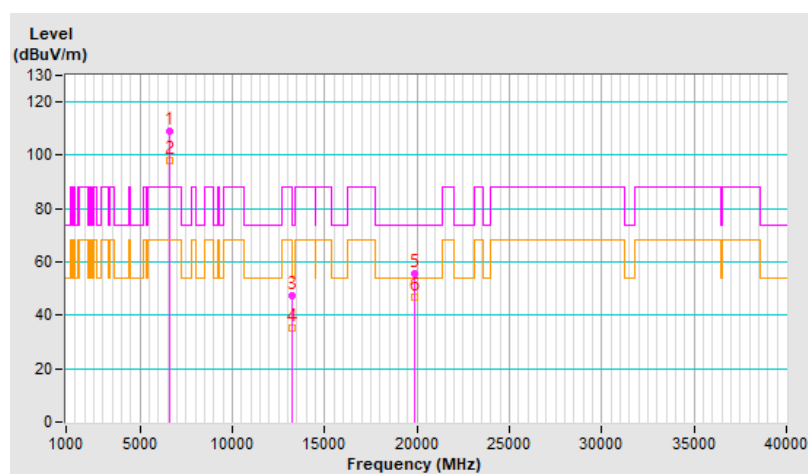


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.2 PK			1.00 V	222	104.4	7.8
2	*6625.00	101.8 AV			1.00 V	222	94.0	7.8
3	13250.00	47.2 PK	74.0	-26.8	1.00 V	266	31.8	15.4
4	13250.00	35.3 AV	54.0	-18.7	1.00 V	266	19.9	15.4
5	19875.00	55.8 PK	74.0	-18.2	2.23 V	155	60.3	-4.5
6	19875.00	45.0 AV	54.0	-9.0	2.23 V	155	49.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

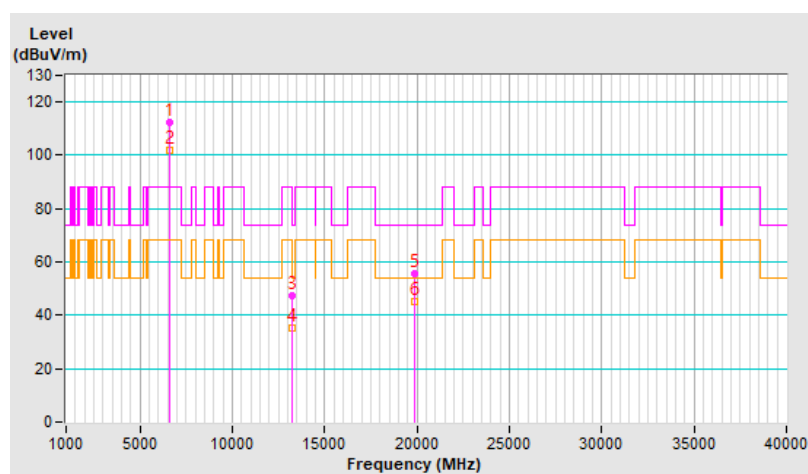


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.1 PK			2.59 H	181	101.4	7.7
2	*6785.00	96.5 AV			2.59 H	181	88.8	7.7
3	#13570.00	46.9 PK	88.2	-41.3	1.48 H	77	31.2	15.7
4	#13570.00	35.1 AV	68.2	-33.1	1.48 H	77	19.4	15.7
5	20355.00	55.0 PK	74.0	-19.0	2.00 H	360	58.8	-3.8
6	20355.00	46.8 AV	54.0	-7.2	2.00 H	360	50.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

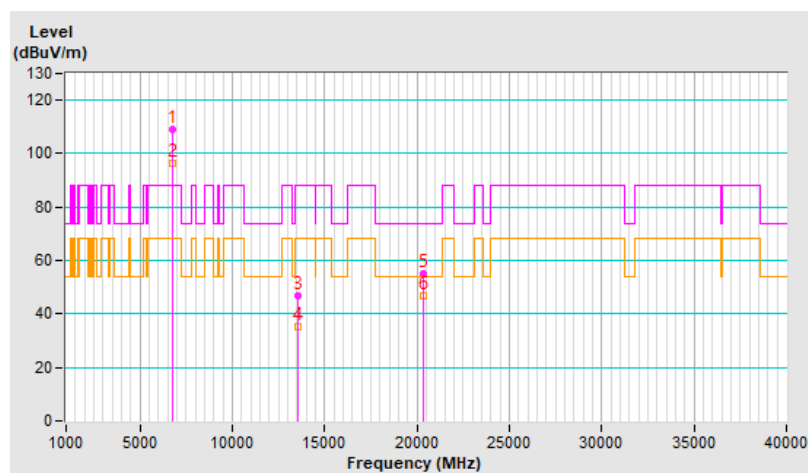


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	103.4 PK			1.82 V	321	95.7	7.7
2	*6785.00	92.7 AV			1.82 V	321	85.0	7.7
3	#13570.00	47.0 PK	88.2	-41.2	1.00 V	252	31.3	15.7
4	#13570.00	35.2 AV	68.2	-33.0	1.00 V	252	19.5	15.7
5	20355.00	55.8 PK	74.0	-18.2	2.19 V	151	59.6	-3.8
6	20355.00	44.9 AV	54.0	-9.1	2.19 V	151	48.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

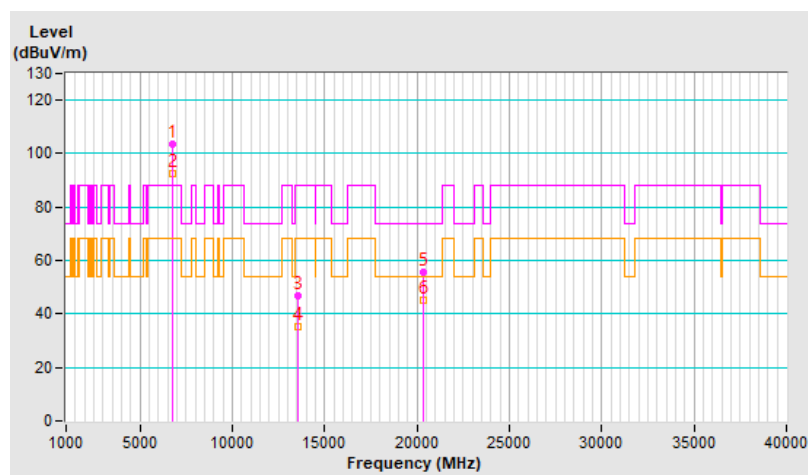


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6025.00	104.0 PK			1.81 H	179	98.4	5.6
2	*6025.00	92.1 AV			1.81 H	179	86.5	5.6
3	#6039.94	75.5 PK	88.2	-12.7	1.81 H	179	69.9	5.6
4	#6039.94	58.4 AV	68.2	-9.8	1.81 H	179	52.8	5.6
5	12050.00	47.3 PK	74.0	-26.7	1.46 H	98	32.7	14.6
6	12050.00	35.4 AV	54.0	-18.6	1.46 H	98	20.8	14.6
7	18075.00	54.7 PK	74.0	-19.3	2.02 H	360	60.0	-5.3
8	18075.00	46.5 AV	54.0	-7.5	2.02 H	360	51.8	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

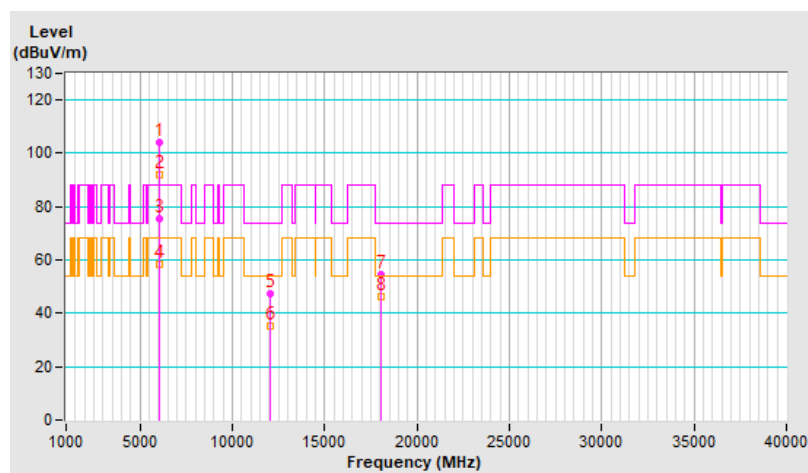


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5832.70	62.7 PK	88.2	-25.5	1.35 V	58	57.4	5.3
2	#5832.70	45.9 AV	68.2	-22.3	1.35 V	58	40.6	5.3
3	*6025.00	101.3 PK			1.35 V	58	95.7	5.6
4	*6025.00	89.5 AV			1.35 V	58	83.9	5.6
5	12050.00	46.7 PK	74.0	-27.3	1.00 V	260	32.1	14.6
6	12050.00	35.2 AV	54.0	-18.8	1.00 V	260	20.6	14.6
7	18075.00	56.4 PK	74.0	-17.6	2.23 V	164	61.7	-5.3
8	18075.00	45.6 AV	54.0	-8.4	2.23 V	164	50.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

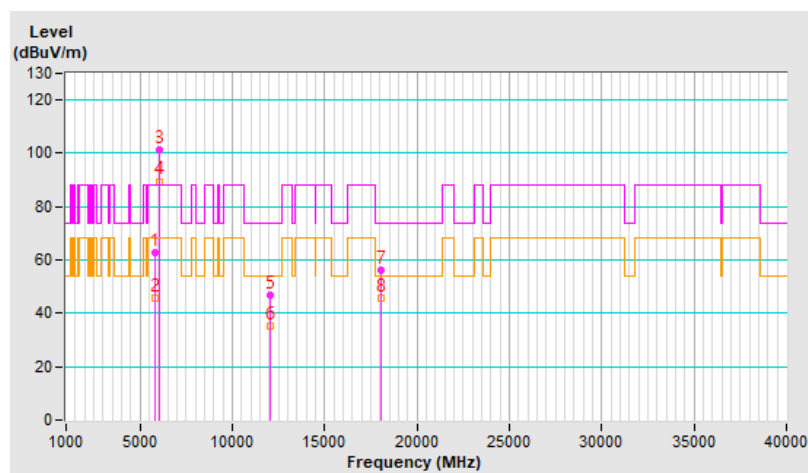


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.3 PK			1.76 H	186	97.9	6.4
2	*6345.00	92.3 AV			1.76 H	186	85.9	6.4
3	12690.00	46.4 PK	74.0	-27.6	1.51 H	77	31.5	14.9
4	12690.00	34.9 AV	54.0	-19.1	1.51 H	77	20.0	14.9
5	19035.00	55.4 PK	74.0	-18.6	2.00 H	353	60.3	-4.9
6	19035.00	46.8 AV	54.0	-7.2	2.00 H	353	51.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

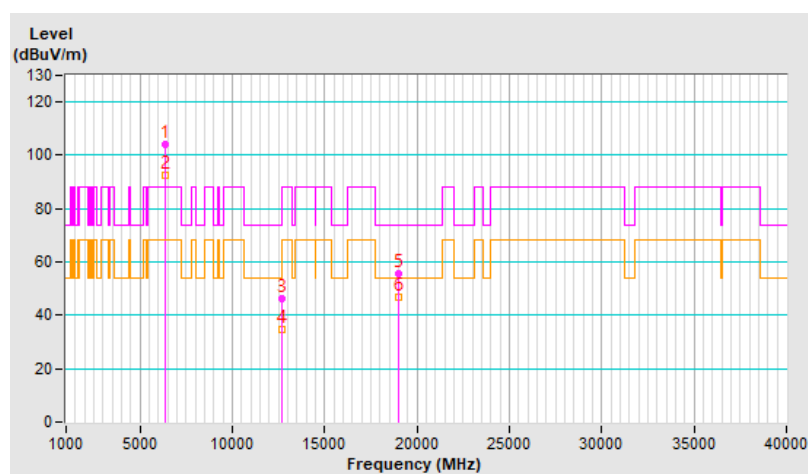


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	112.2 PK			1.06 V	246	105.8	6.4
2	*6345.00	101.9 AV			1.06 V	246	95.5	6.4
3	12690.00	46.6 PK	74.0	-27.4	1.00 V	268	31.7	14.9
4	12690.00	35.0 AV	54.0	-19.0	1.00 V	268	20.1	14.9
5	19035.00	56.0 PK	74.0	-18.0	2.27 V	162	60.9	-4.9
6	19035.00	45.2 AV	54.0	-8.8	2.27 V	162	50.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

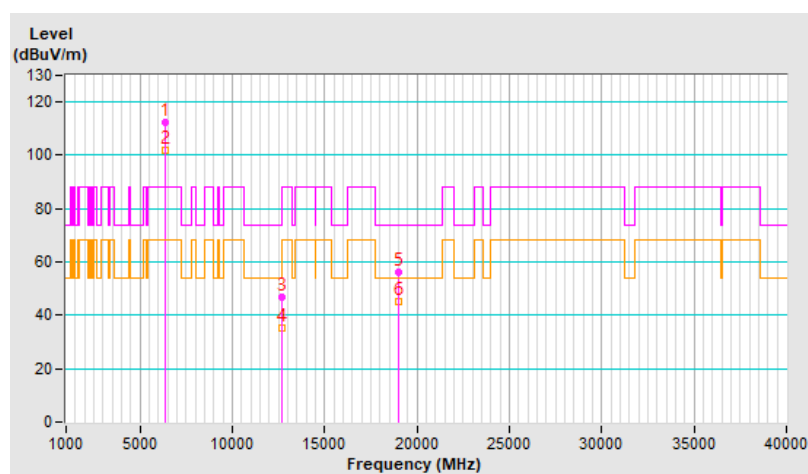


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.1 PK			1.66 H	181	95.3	7.8
2	*6665.00	92.2 AV			1.66 H	181	84.4	7.8
3	13330.00	47.3 PK	74.0	-26.7	1.44 H	76	32.0	15.3
4	13330.00	35.4 AV	54.0	-18.6	1.44 H	76	20.1	15.3
5	19995.00	55.6 PK	74.0	-18.4	1.93 H	351	60.0	-4.4
6	19995.00	46.9 AV	54.0	-7.1	1.93 H	351	51.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

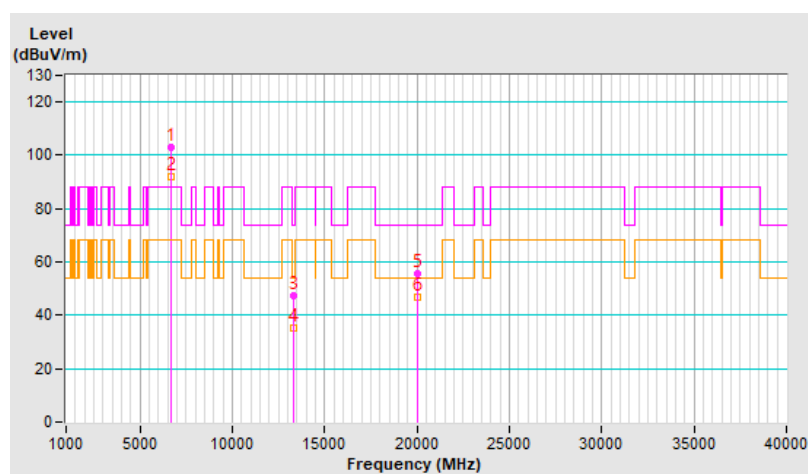


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	98.1 PK			1.86 V	64	90.3	7.8
2	*6665.00	87.5 AV			1.86 V	64	79.7	7.8
3	13330.00	46.5 PK	74.0	-27.5	1.06 V	255	31.2	15.3
4	13330.00	34.9 AV	54.0	-19.1	1.06 V	255	19.6	15.3
5	19995.00	55.9 PK	74.0	-18.1	2.18 V	154	60.3	-4.4
6	19995.00	45.0 AV	54.0	-9.0	2.18 V	154	49.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

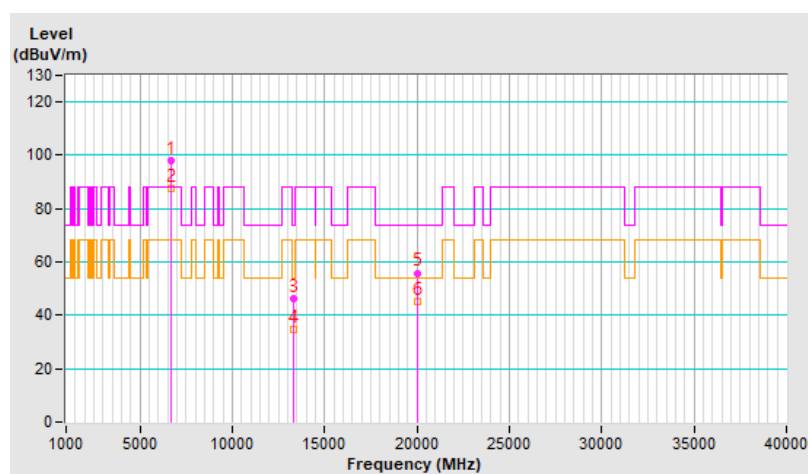


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.6 PK	88.2	-6.6	1.84 H	179	76.0	5.6
2	#5925.00	60.4 AV	68.2	-7.8	1.84 H	179	54.8	5.6
3	*6025.00	105.6 PK			1.84 H	179	100.0	5.6
4	*6025.00	92.7 AV			1.84 H	179	87.1	5.6
5	12050.00	46.7 PK	74.0	-27.3	1.49 H	81	32.1	14.6
6	12050.00	35.2 AV	54.0	-18.8	1.49 H	81	20.6	14.6
7	18075.00	55.3 PK	74.0	-18.7	2.02 H	354	60.6	-5.3
8	18075.00	47.0 AV	54.0	-7.0	2.02 H	354	52.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

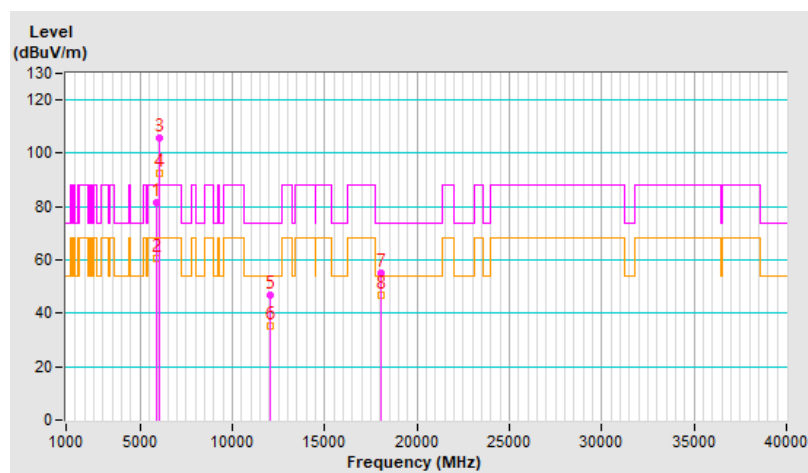


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.2 PK	108.2	-30.0	1.83 V	62	72.6	5.6
2	#5925.00	56.8 AV	88.2	-31.4	1.83 V	62	51.2	5.6
3	*6025.00	101.9 PK			1.83 V	62	96.3	5.6
4	*6025.00	90.1 AV			1.83 V	62	84.5	5.6
5	12050.00	46.4 PK	74.0	-27.6	1.00 V	251	31.8	14.6
6	12050.00	35.0 AV	54.0	-19.0	1.00 V	251	20.4	14.6
7	18075.00	56.0 PK	74.0	-18.0	2.25 V	179	61.3	-5.3
8	18075.00	45.3 AV	54.0	-8.7	2.25 V	179	50.6	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

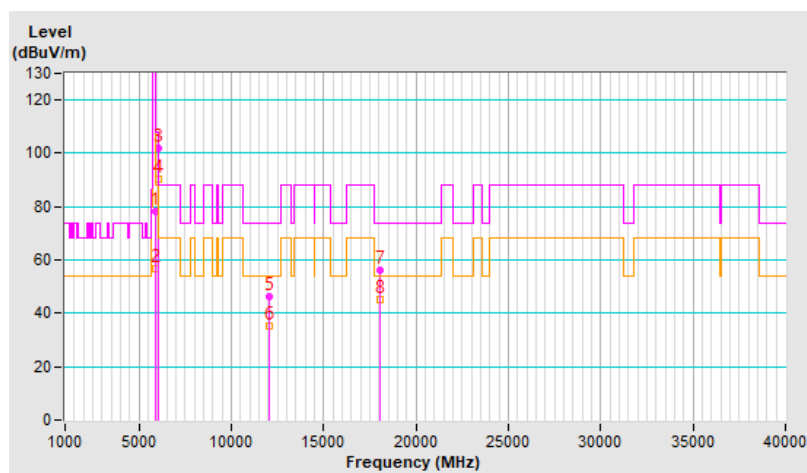


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.4 PK			1.89 H	177	99.0	6.4
2	*6345.00	92.6 AV			1.89 H	177	86.2	6.4
3	12690.00	47.0 PK	74.0	-27.0	1.48 H	96	32.1	14.9
4	12690.00	35.4 AV	54.0	-18.6	1.48 H	96	20.5	14.9
5	19035.00	55.0 PK	74.0	-19.0	1.96 H	360	59.9	-4.9
6	19035.00	46.2 AV	54.0	-7.8	1.96 H	360	51.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

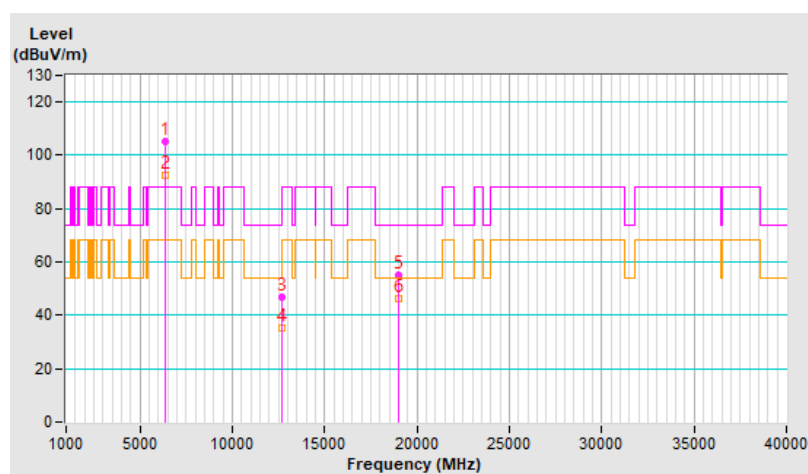


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	101.7 PK			1.79 V	66	95.3	6.4
2	*6345.00	90.1 AV			1.79 V	66	83.7	6.4
3	12690.00	46.9 PK	74.0	-27.1	1.00 V	245	32.0	14.9
4	12690.00	35.1 AV	54.0	-18.9	1.00 V	245	20.2	14.9
5	19035.00	56.1 PK	74.0	-17.9	2.25 V	179	61.0	-4.9
6	19035.00	45.3 AV	54.0	-8.7	2.25 V	179	50.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

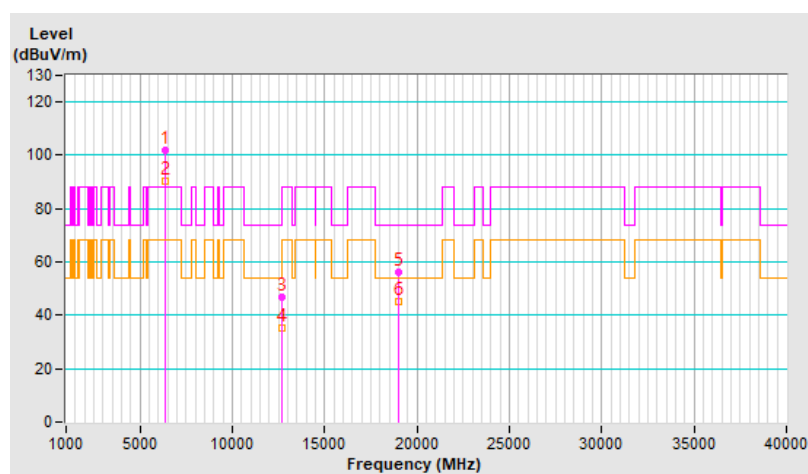


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.3 PK			1.72 H	175	95.5	7.8
2	*6665.00	92.1 AV			1.72 H	175	84.3	7.8
3	13330.00	46.9 PK	74.0	-27.1	1.43 H	100	31.6	15.3
4	13330.00	34.9 AV	54.0	-19.1	1.43 H	100	19.6	15.3
5	19995.00	54.7 PK	74.0	-19.3	2.01 H	357	59.1	-4.4
6	19995.00	46.3 AV	54.0	-7.7	2.01 H	357	50.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

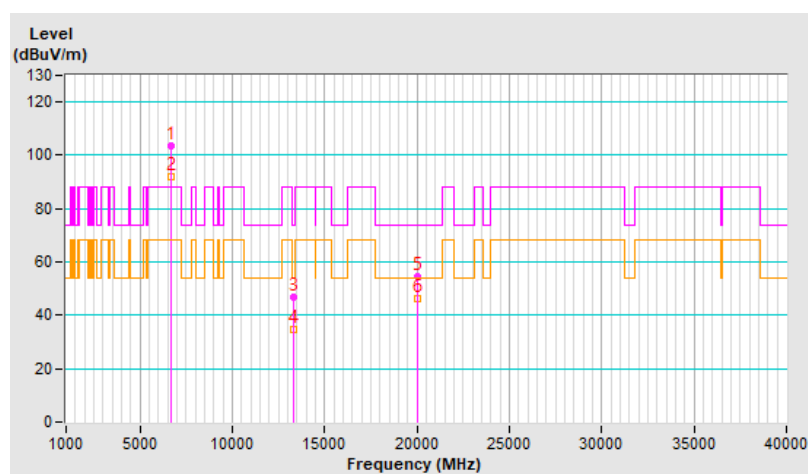


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	98.6 PK			1.80 V	65	90.8	7.8
2	*6665.00	87.3 AV			1.80 V	65	79.5	7.8
3	13330.00	46.4 PK	74.0	-27.6	1.00 V	259	31.1	15.3
4	13330.00	35.0 AV	54.0	-19.0	1.00 V	259	19.7	15.3
5	19995.00	55.9 PK	74.0	-18.1	2.19 V	153	60.3	-4.4
6	19995.00	44.9 AV	54.0	-9.1	2.19 V	153	49.3	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

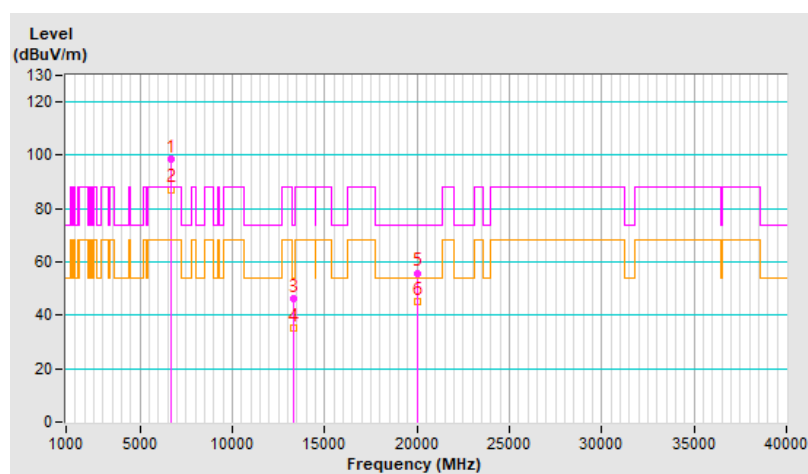


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

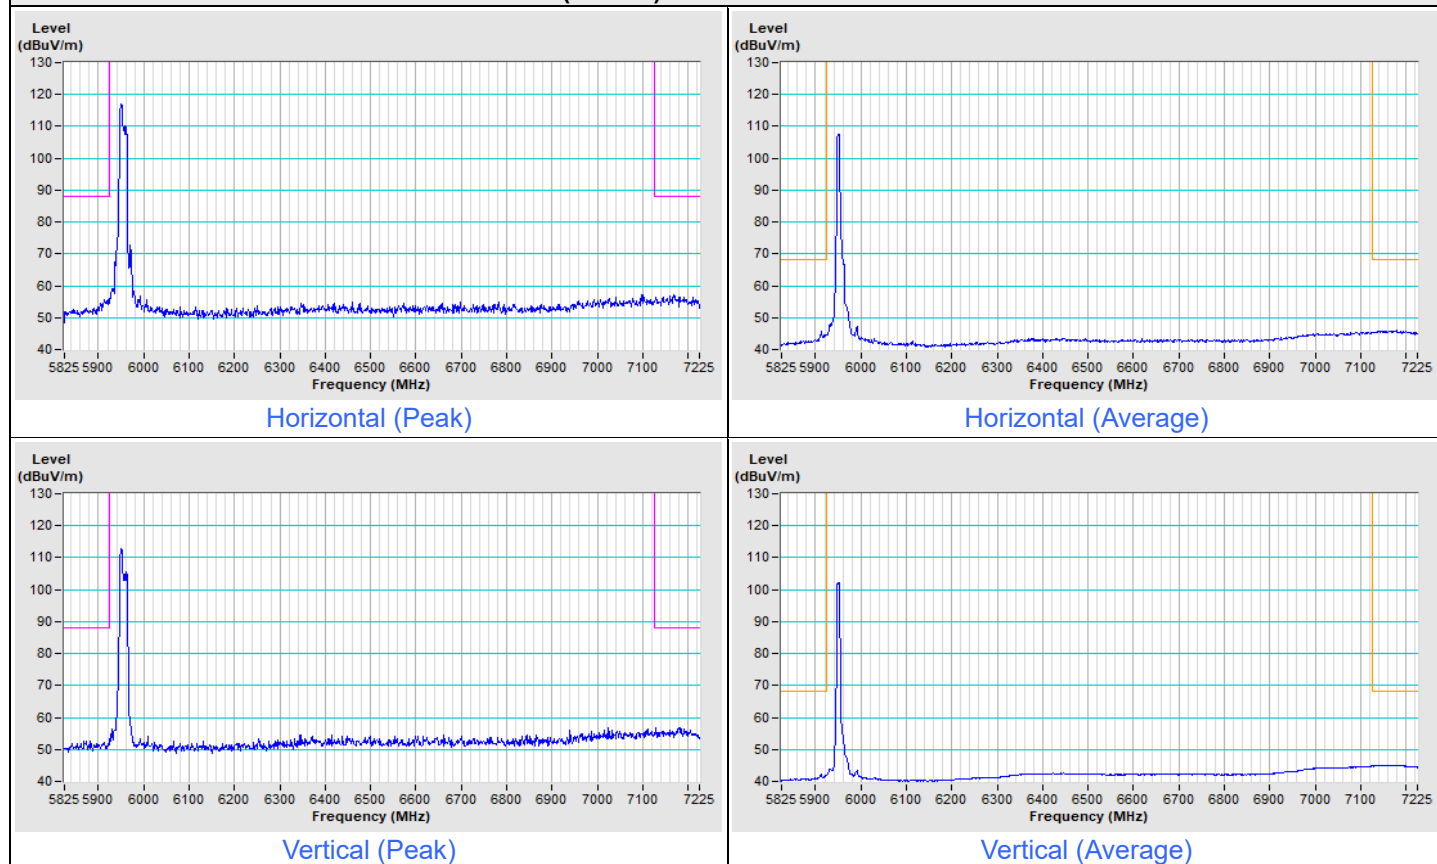


802.11be (EHT20) 52+26-tone MRU Channel 181

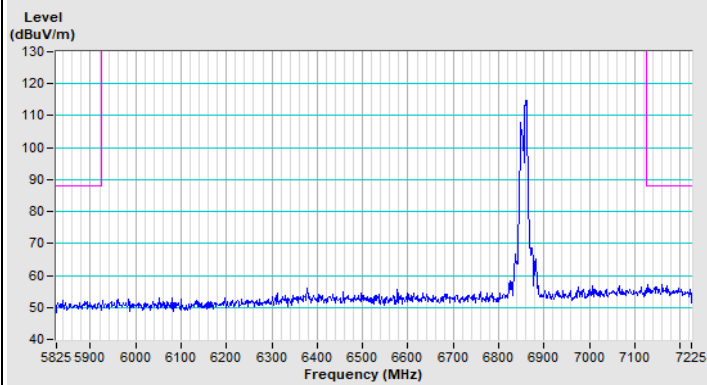


Horizontal (Peak)

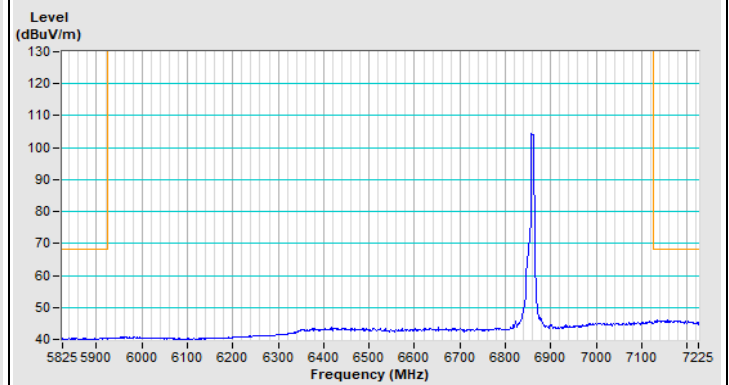

Horizontal (Average)

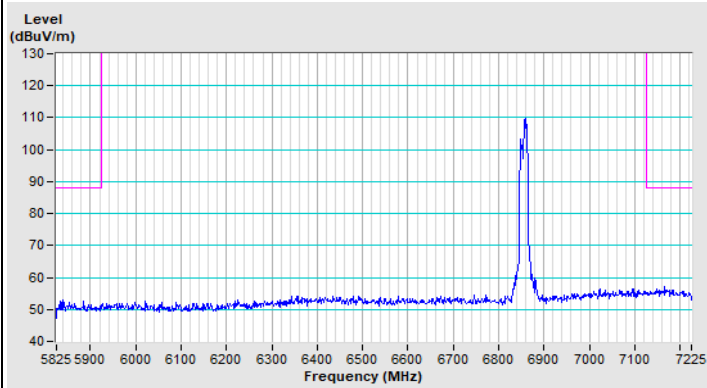


Vertical (Peak)

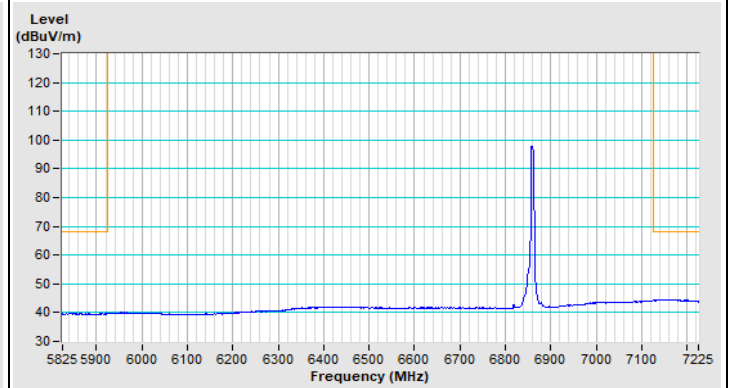


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

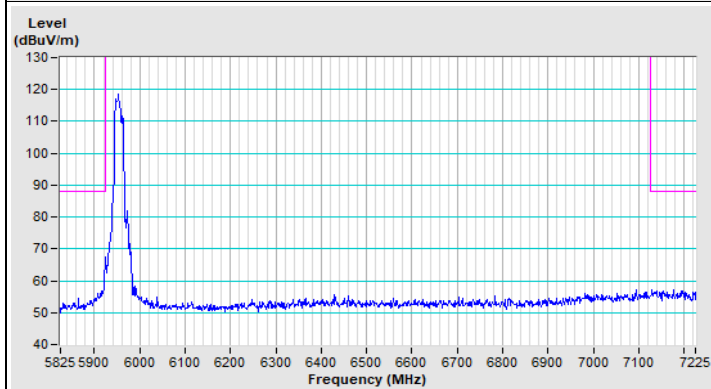


Horizontal (Peak)

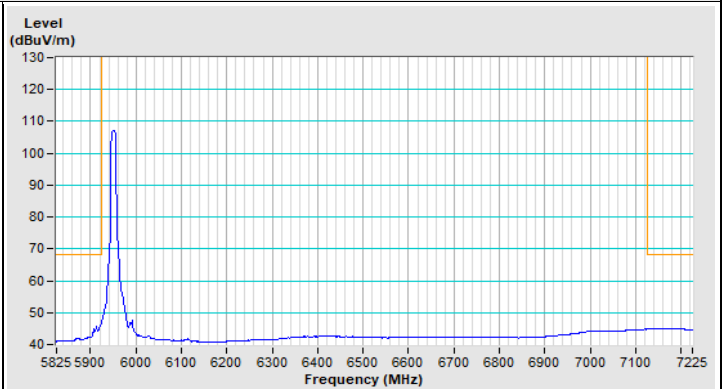

Horizontal (Average)

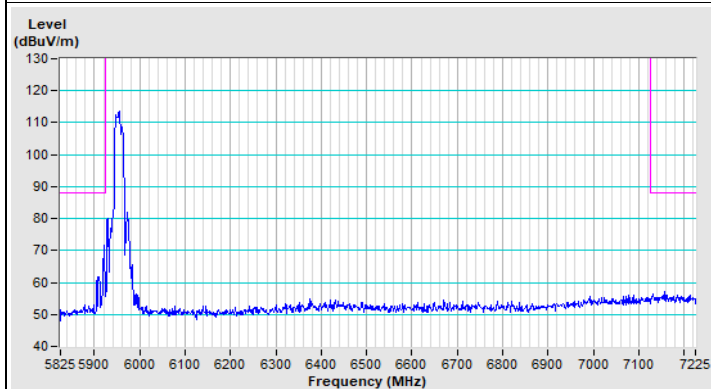


Vertical (Peak)

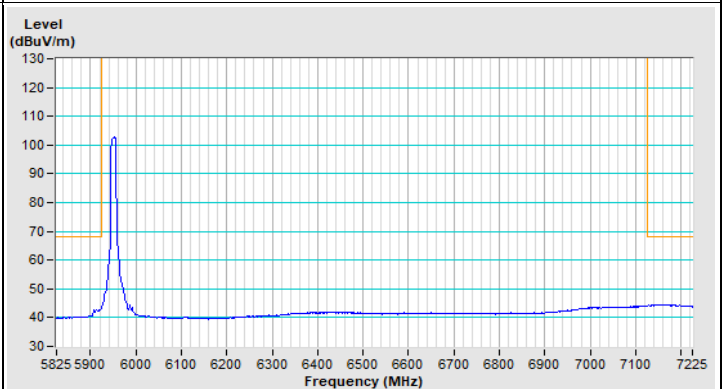


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 181

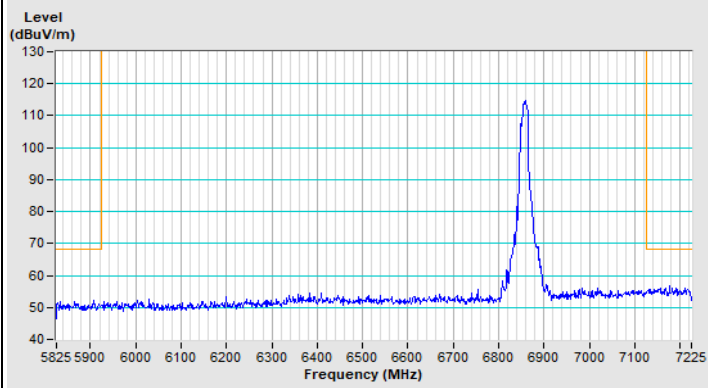


Horizontal (Peak)

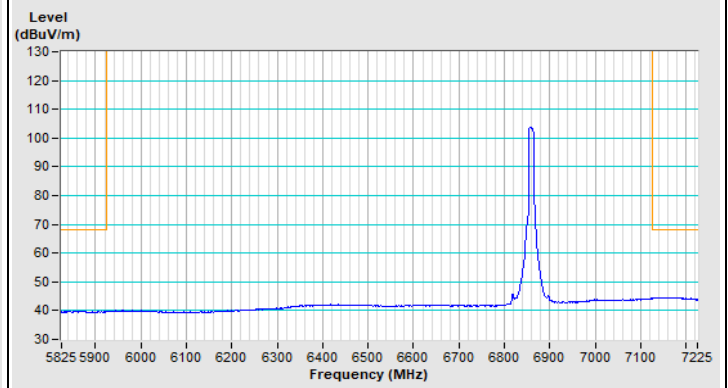

Horizontal (Average)

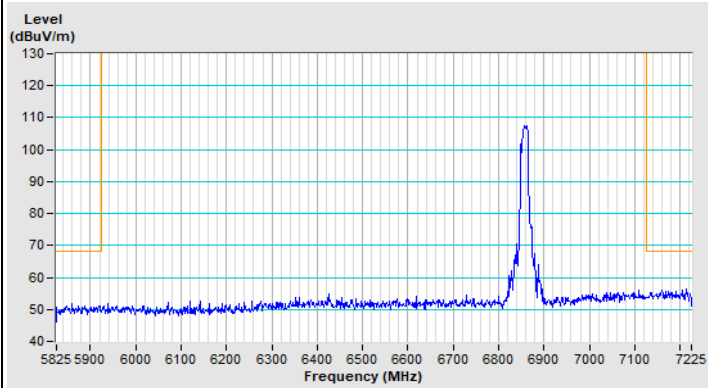


Vertical (Peak)

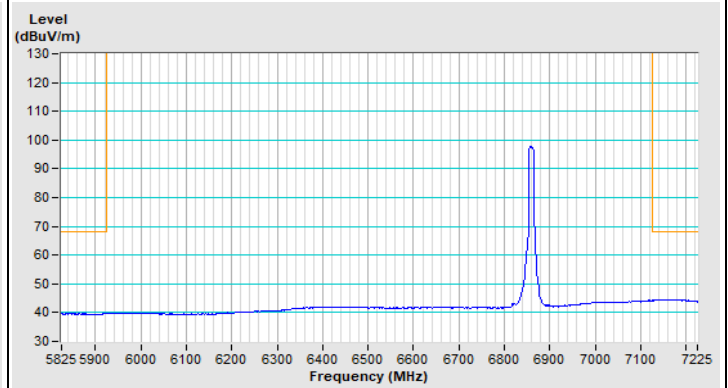


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

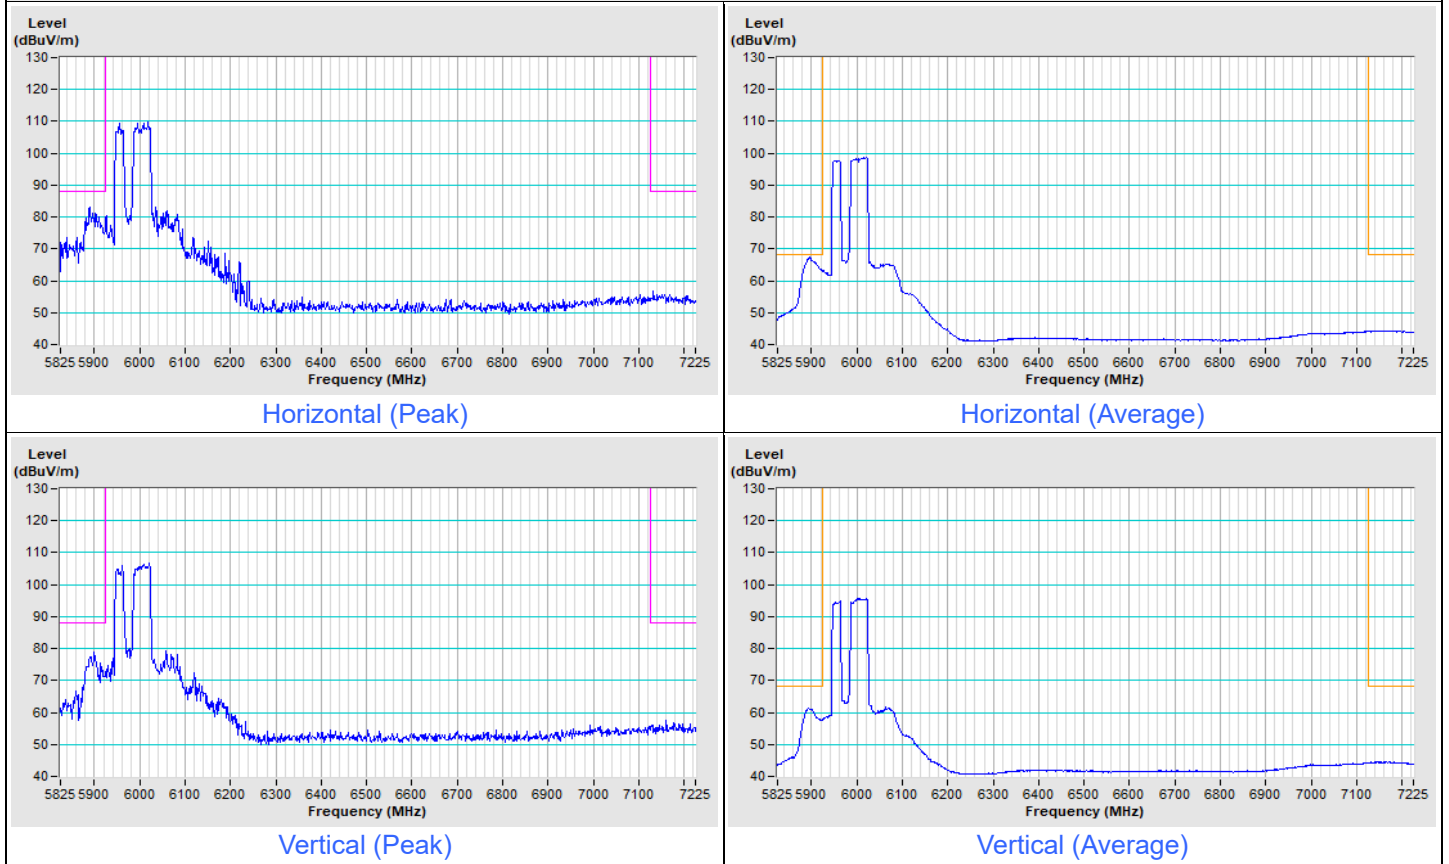


802.11be (EHT80) 484+242-tone MRU Channel 167

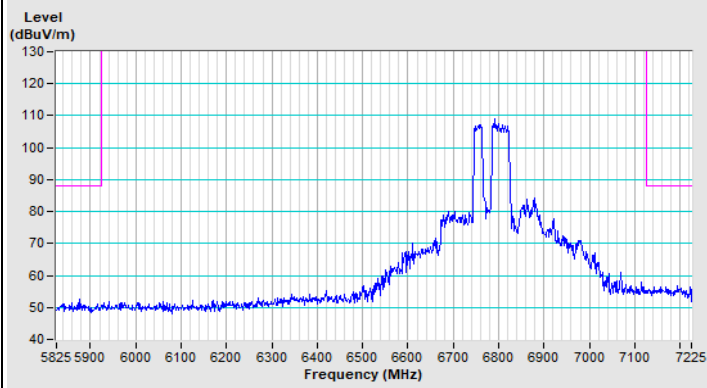


Horizontal (Peak)

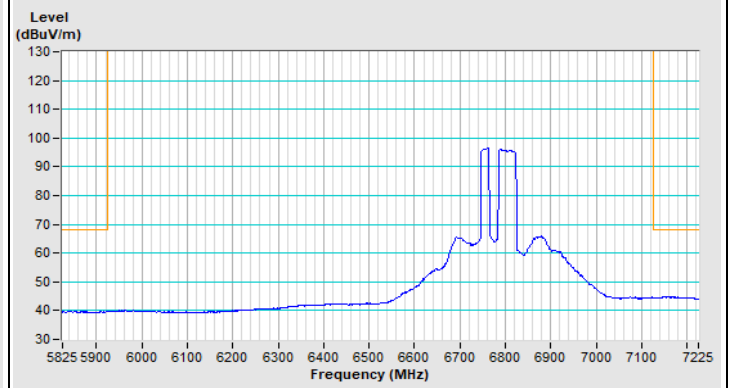

Horizontal (Average)

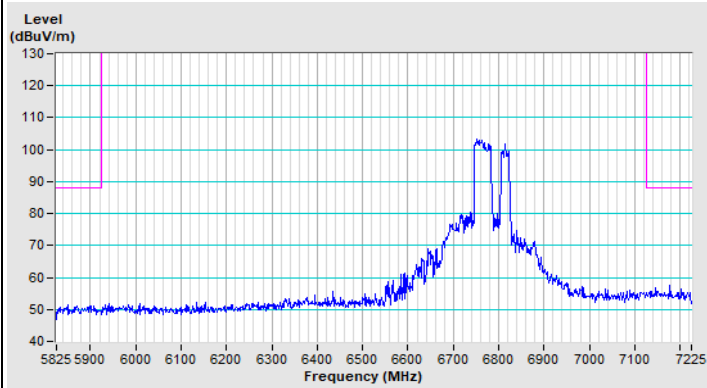


Vertical (Peak)

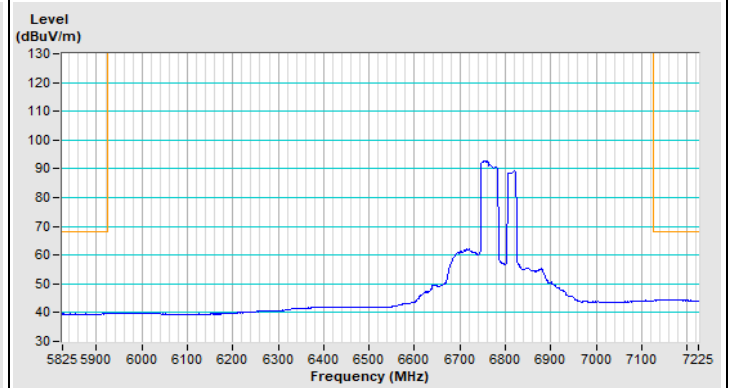


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

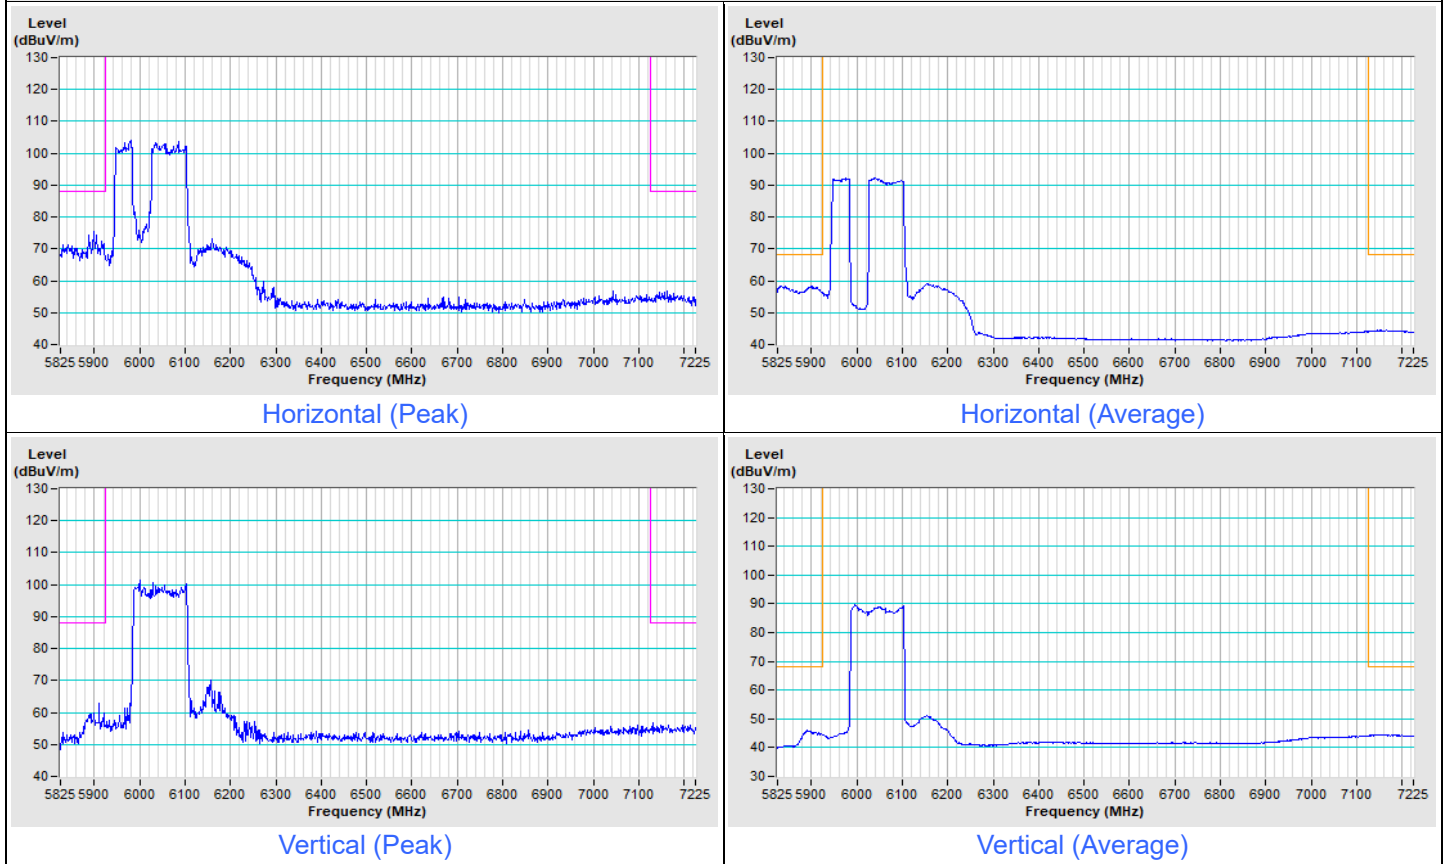


802.11be (EHT160) 996+484-tone MRU Channel 143

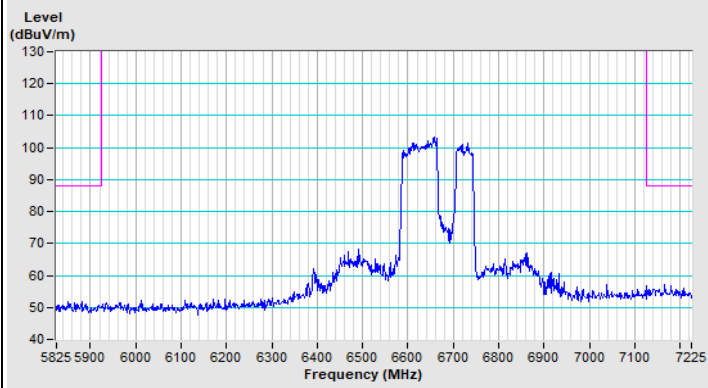


Horizontal (Peak)

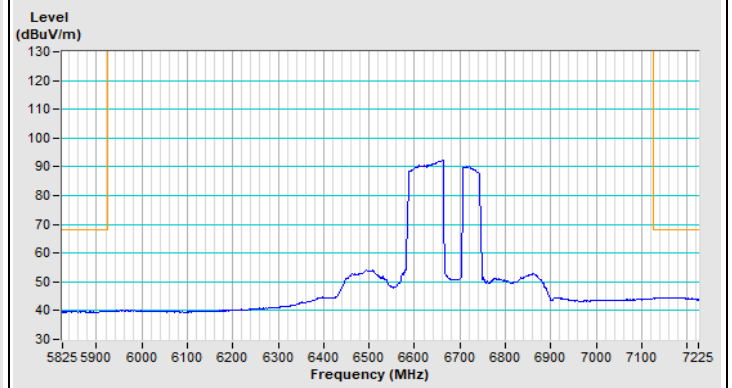

Horizontal (Average)

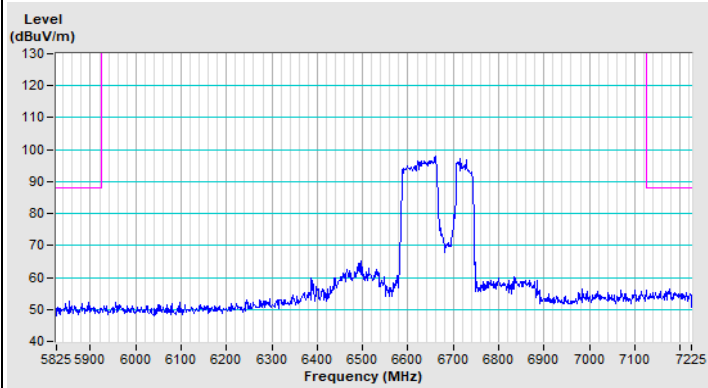


Vertical (Peak)

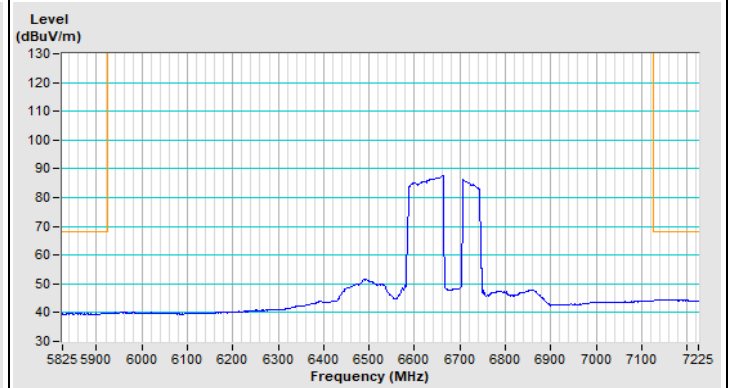


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

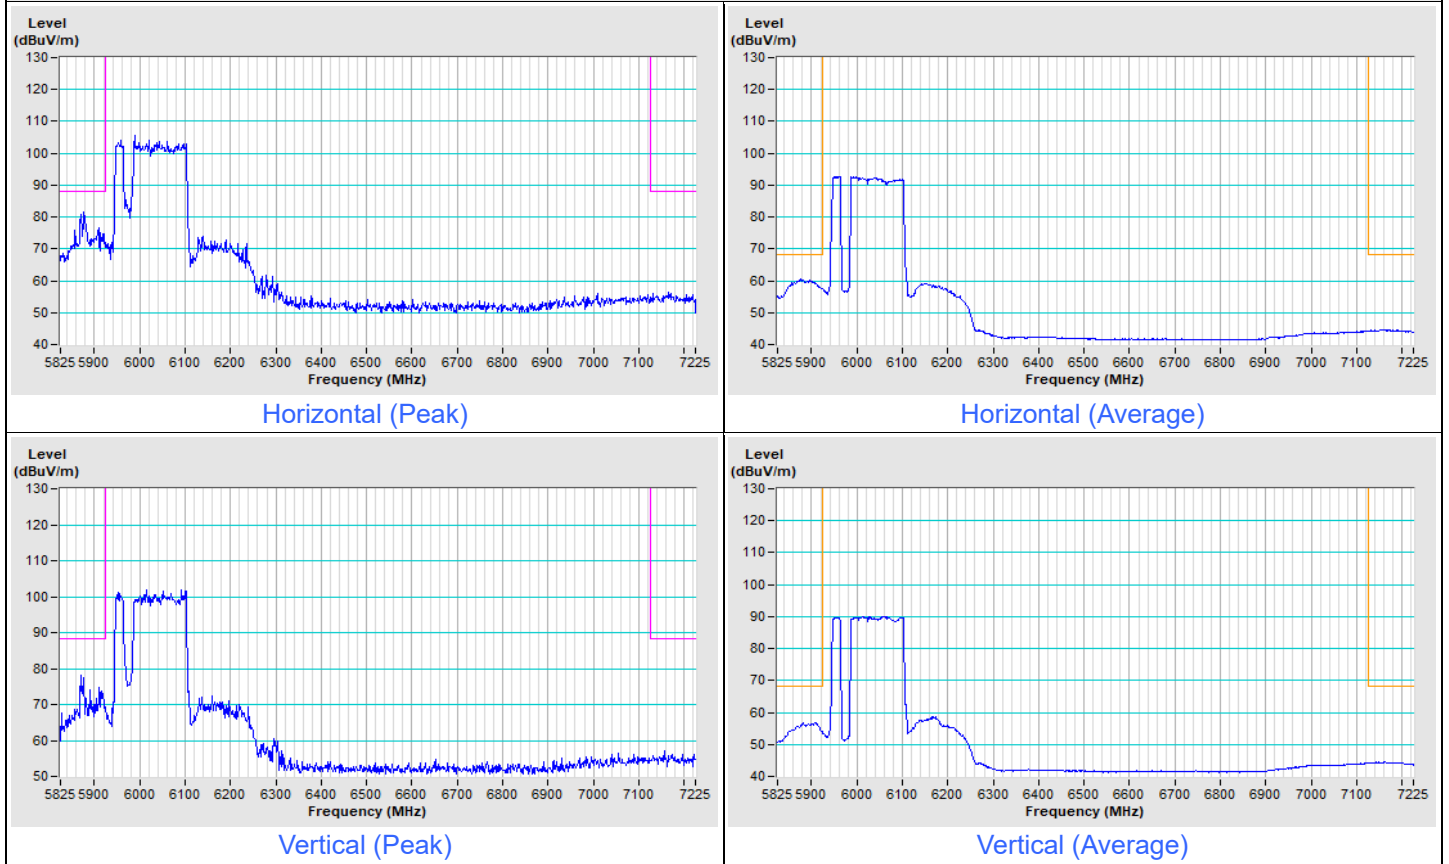


802.11be (EHT160) 996+484+242-tone MRU Channel 143

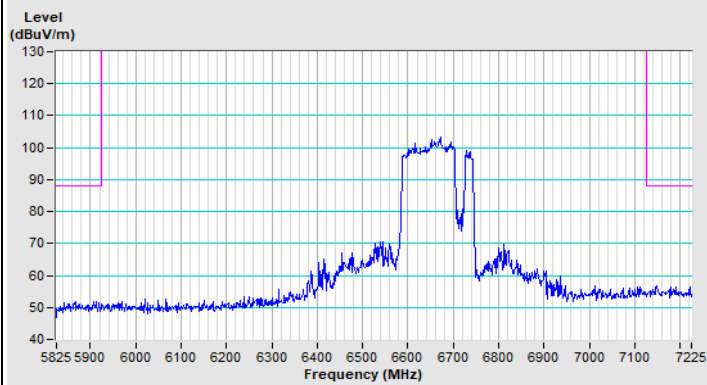


Horizontal (Peak)

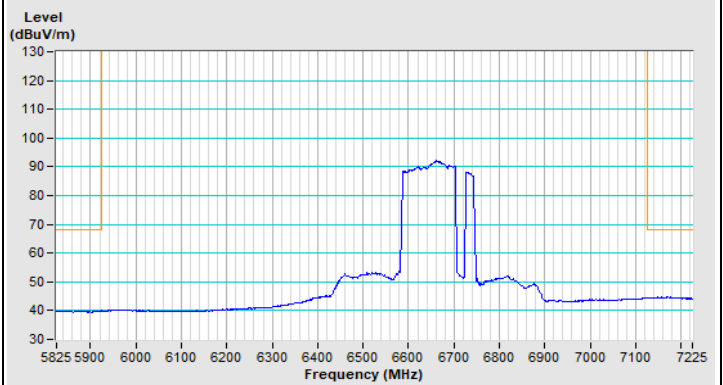

Horizontal (Average)

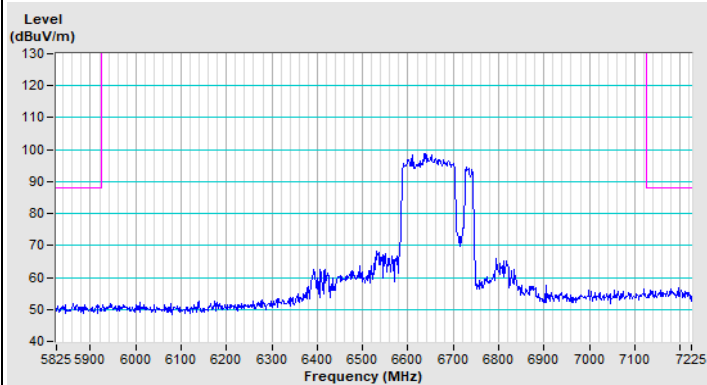

Vertical (Peak)

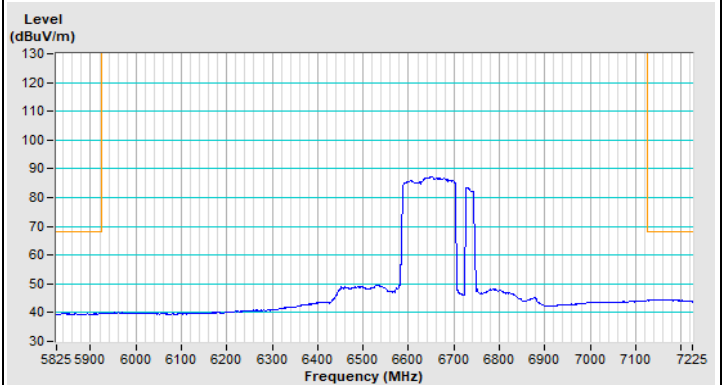

Vertical (Average)


Mode A_2TX

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.0 PK	88.2	-34.2	1.86 H	176	48.4	5.6
2	#5925.00	42.5 AV	68.2	-25.7	1.86 H	176	36.9	5.6
3	*5955.00	114.5 PK			1.86 H	176	109.0	5.5
4	*5955.00	104.8 AV			1.86 H	176	99.3	5.5
5	11910.00	46.2 PK	74.0	-27.8	1.80 H	154	31.6	14.6
6	11910.00	34.0 AV	54.0	-20.0	1.80 H	154	19.4	14.6
7	17865.00	57.8 PK	74.0	-16.2	1.82 H	16	31.9	25.9
8	17865.00	45.4 AV	54.0	-8.6	1.82 H	16	19.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

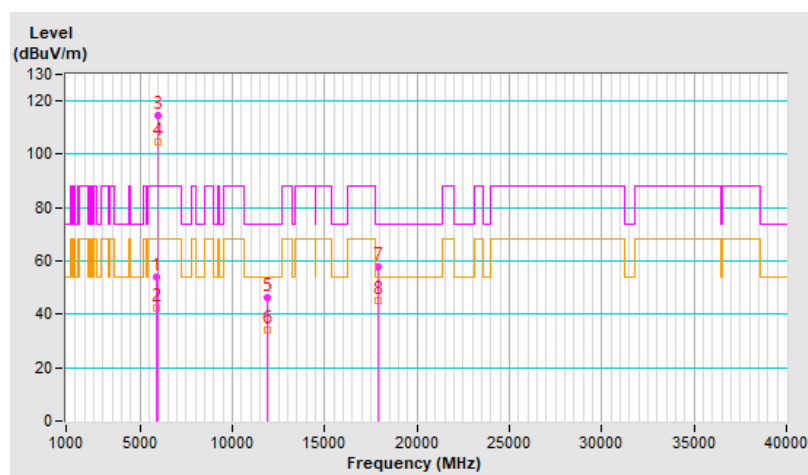


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.0 PK	88.2	-35.2	1.31 V	231	47.4	5.6
2	#5925.00	41.6 AV	68.2	-26.6	1.31 V	231	36.0	5.6
3	*5955.00	113.6 PK			1.31 V	231	108.1	5.5
4	*5955.00	103.1 AV			1.31 V	231	97.6	5.5
5	11910.00	45.8 PK	74.0	-28.2	1.58 V	105	31.2	14.6
6	11910.00	33.8 AV	54.0	-20.2	1.58 V	105	19.2	14.6
7	17865.00	60.2 PK	74.0	-13.8	1.81 V	53	34.3	25.9
8	17865.00	47.1 AV	54.0	-6.9	1.81 V	53	21.2	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

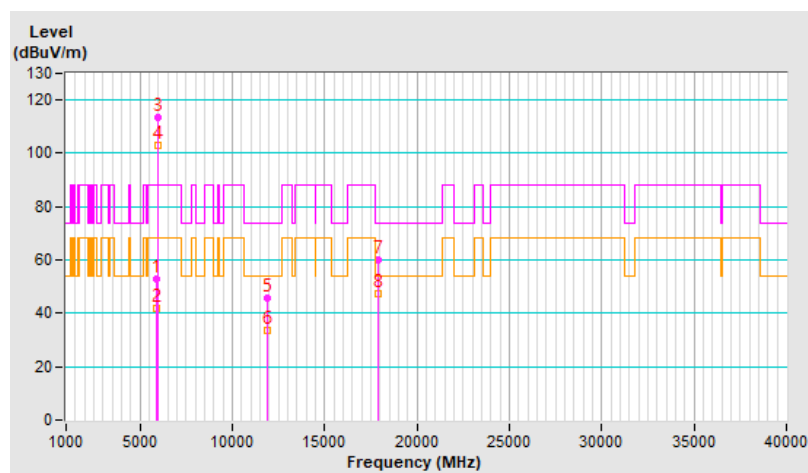


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.4 PK			1.83 H	166	107.6	6.8
2	*6415.00	104.8 AV			1.83 H	166	98.0	6.8
3	#12830.00	46.4 PK	88.2	-41.8	1.74 H	157	31.3	15.1
4	#12830.00	33.8 AV	68.2	-34.4	1.74 H	157	18.7	15.1
5	19245.00	57.5 PK	74.0	-16.5	1.86 H	26	62.1	-4.6
6	19245.00	44.9 AV	54.0	-9.1	1.86 H	26	49.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

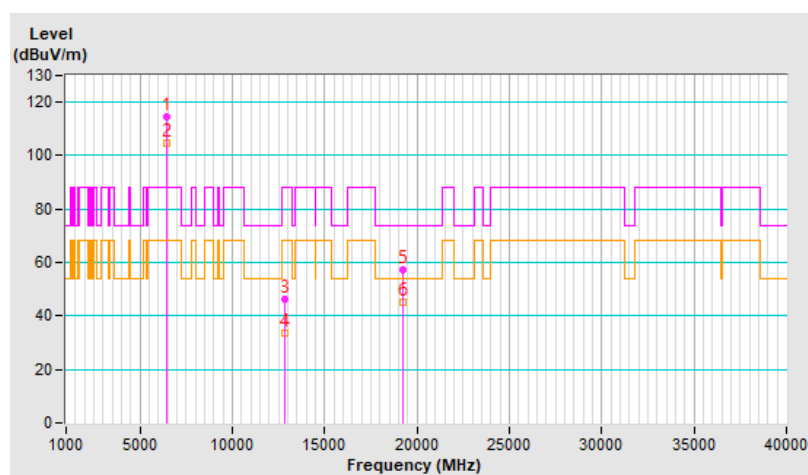


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.3 PK			1.28 V	234	106.5	6.8
2	*6415.00	102.7 AV			1.28 V	234	95.9	6.8
3	#12830.00	44.8 PK	88.2	-43.4	1.65 V	123	29.7	15.1
4	#12830.00	33.0 AV	68.2	-35.2	1.65 V	123	17.9	15.1
5	19245.00	59.4 PK	74.0	-14.6	1.81 V	39	64.0	-4.6
6	19245.00	46.6 AV	54.0	-7.4	1.81 V	39	51.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

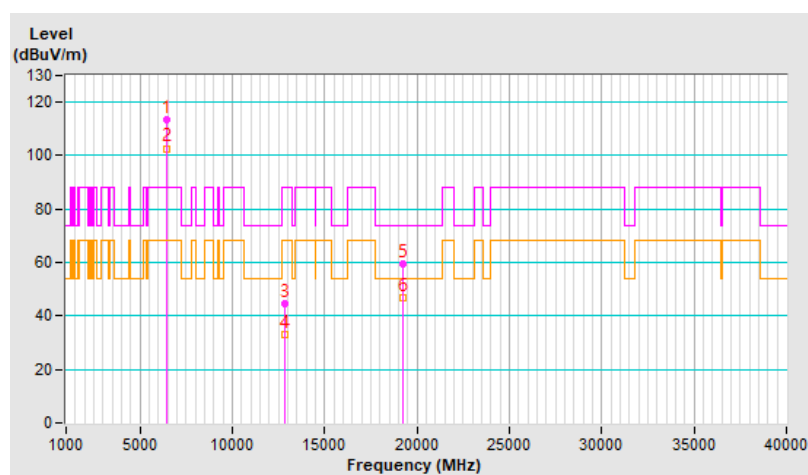


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.5 PK			1.87 H	168	107.1	7.4
2	*6535.00	105.0 AV			1.87 H	168	97.6	7.4
3	#13070.00	46.7 PK	88.2	-41.5	1.83 H	153	31.6	15.1
4	#13070.00	34.2 AV	68.2	-34.0	1.83 H	153	19.1	15.1
5	19605.00	57.6 PK	74.0	-16.4	1.85 H	0	62.4	-4.8
6	19605.00	44.8 AV	54.0	-9.2	1.85 H	0	49.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

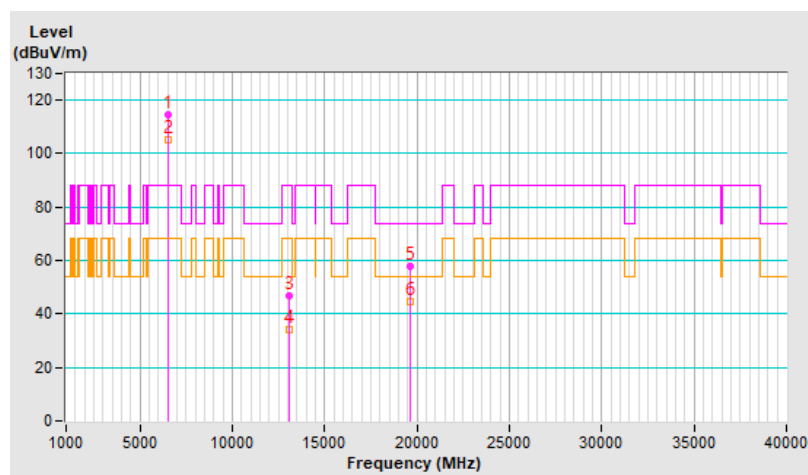


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.4 PK			1.26 V	245	106.0	7.4
2	*6535.00	103.1 AV			1.26 V	245	95.7	7.4
3	#13070.00	45.1 PK	88.2	-43.1	1.63 V	123	30.0	15.1
4	#13070.00	33.6 AV	68.2	-34.6	1.63 V	123	18.5	15.1
5	19605.00	59.5 PK	74.0	-14.5	1.73 V	42	64.3	-4.8
6	19605.00	46.5 AV	54.0	-7.5	1.73 V	42	51.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

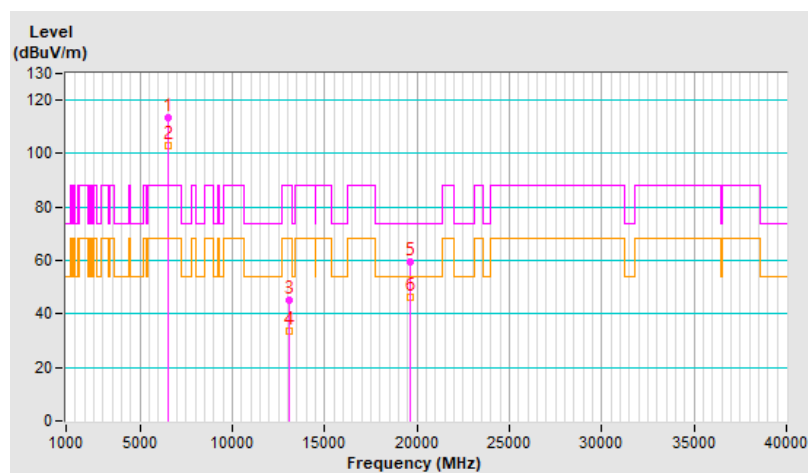


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.1 PK			1.77 H	168	109.9	8.2
2	*6855.00	107.0 AV			1.77 H	168	98.8	8.2
3	#13710.00	46.6 PK	88.2	-41.6	1.83 H	162	30.3	16.3
4	#13710.00	33.9 AV	68.2	-34.3	1.83 H	162	17.6	16.3
5	20565.00	57.8 PK	74.0	-16.2	1.83 H	22	61.5	-3.7
6	20565.00	45.3 AV	54.0	-8.7	1.83 H	22	49.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

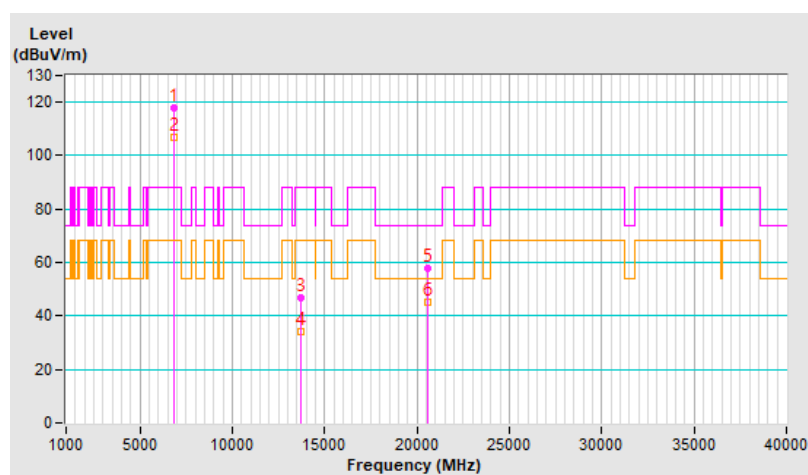


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.7 PK			1.82 V	59	99.5	8.2
2	*6855.00	104.4 AV			1.82 V	59	96.2	8.2
3	#13710.00	45.3 PK	88.2	-42.9	1.63 V	102	29.0	16.3
4	#13710.00	33.5 AV	68.2	-34.7	1.63 V	102	17.2	16.3
5	20565.00	59.3 PK	74.0	-14.7	1.73 V	44	63.0	-3.7
6	20565.00	46.6 AV	54.0	-7.4	1.73 V	44	50.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

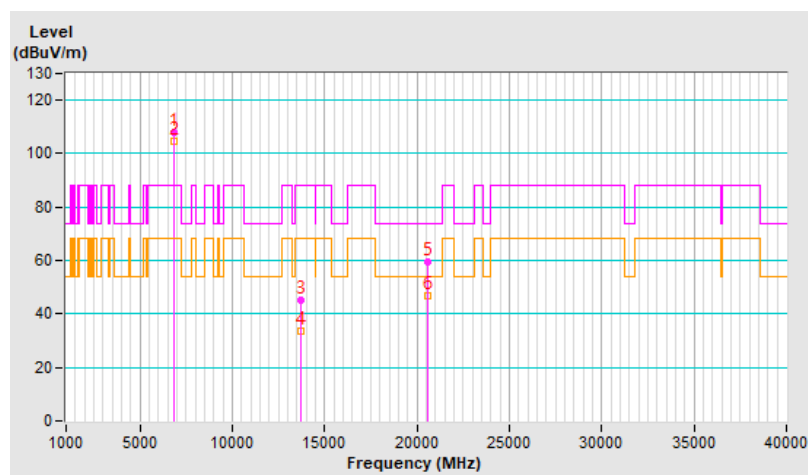


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.0 PK	88.2	-24.2	1.90 H	172	58.4	5.6
2	#5925.00	46.8 AV	68.2	-21.4	1.90 H	172	41.2	5.6
3	*5955.00	117.4 PK			1.90 H	172	111.9	5.5
4	*5955.00	107.5 AV			1.90 H	172	102.0	5.5
5	11910.00	46.8 PK	74.0	-27.2	1.77 H	159	32.2	14.6
6	11910.00	34.2 AV	54.0	-19.8	1.77 H	159	19.6	14.6
7	17865.00	58.2 PK	74.0	-15.8	1.76 H	0	32.3	25.9
8	17865.00	45.2 AV	54.0	-8.8	1.76 H	0	19.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

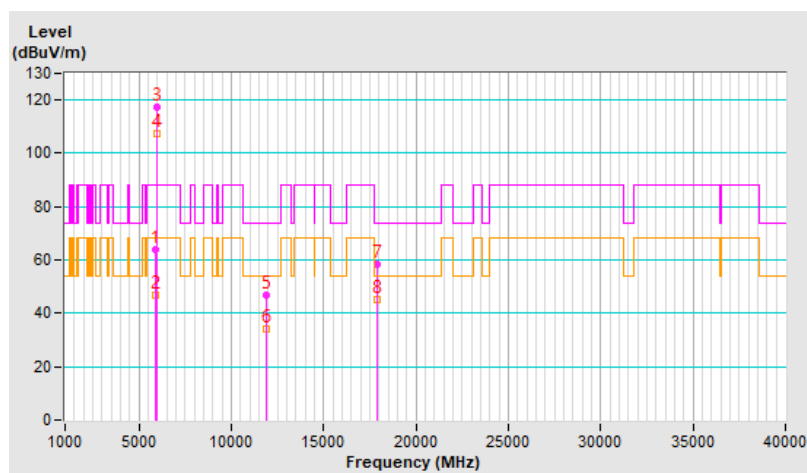


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.5 PK	88.2	-30.7	1.23 V	233	51.9	5.6
2	#5925.00	43.0 AV	68.2	-25.2	1.23 V	233	37.4	5.6
3	*5955.00	113.3 PK			1.23 V	233	107.8	5.5
4	*5955.00	103.1 AV			1.23 V	233	97.6	5.5
5	11910.00	45.4 PK	74.0	-28.6	1.62 V	110	30.8	14.6
6	11910.00	33.6 AV	54.0	-20.4	1.62 V	110	19.0	14.6
7	17865.00	59.5 PK	74.0	-14.5	1.76 V	38	33.6	25.9
8	17865.00	46.4 AV	54.0	-7.6	1.76 V	38	20.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

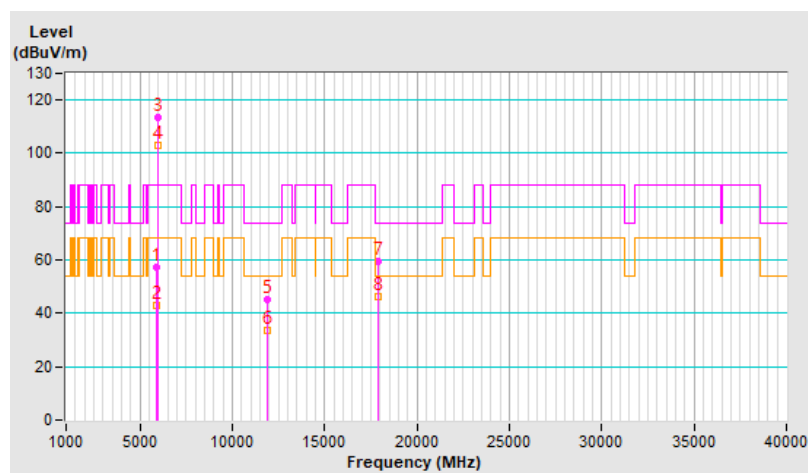


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.7 PK			1.85 H	175	110.9	6.8
2	*6415.00	107.8 AV			1.85 H	175	101.0	6.8
3	#12830.00	46.9 PK	88.2	-41.3	1.79 H	147	31.8	15.1
4	#12830.00	34.3 AV	68.2	-33.9	1.79 H	147	19.2	15.1
5	19245.00	58.4 PK	74.0	-15.6	1.76 H	3	63.0	-4.6
6	19245.00	45.6 AV	54.0	-8.4	1.76 H	3	50.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

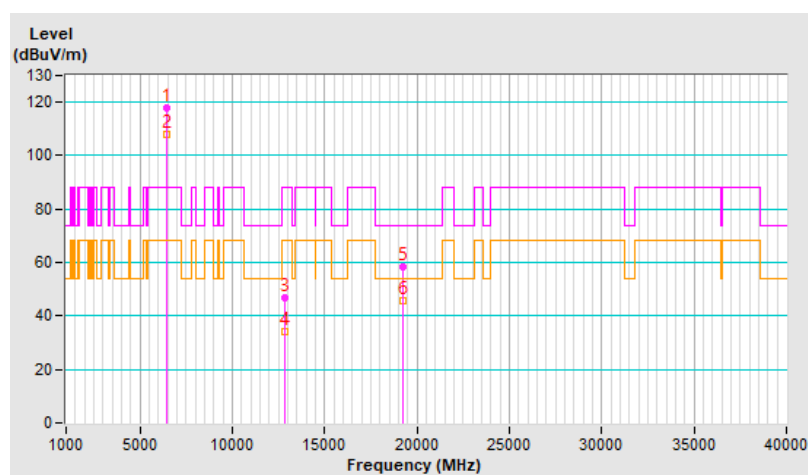


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.3 PK			1.27 V	224	106.5	6.8
2	*6415.00	103.1 AV			1.27 V	224	96.3	6.8
3	#12830.00	45.3 PK	88.2	-42.9	1.58 V	125	30.2	15.1
4	#12830.00	33.7 AV	68.2	-34.5	1.58 V	125	18.6	15.1
5	19245.00	60.0 PK	74.0	-14.0	1.75 V	29	64.6	-4.6
6	19245.00	47.1 AV	54.0	-6.9	1.75 V	29	51.7	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

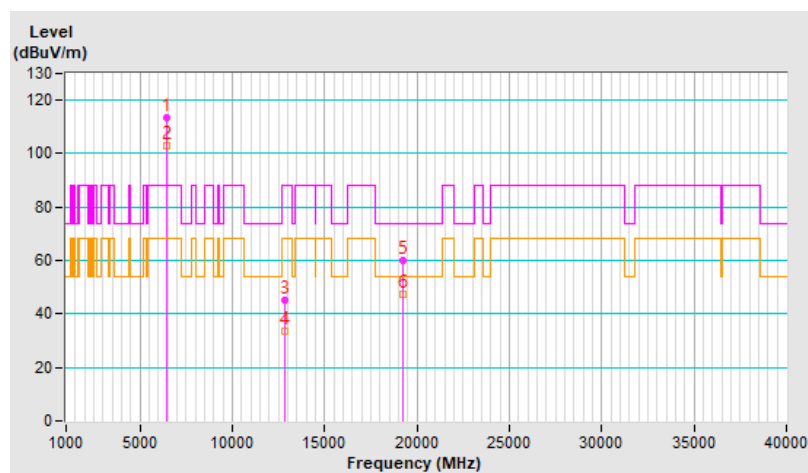


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.0 PK			1.91 H	186	109.6	7.4
2	*6535.00	107.1 AV			1.91 H	186	99.7	7.4
3	#13070.00	45.8 PK	88.2	-42.4	1.82 H	159	30.7	15.1
4	#13070.00	33.7 AV	68.2	-34.5	1.82 H	159	18.6	15.1
5	19605.00	57.8 PK	74.0	-16.2	1.76 H	26	62.6	-4.8
6	19605.00	45.3 AV	54.0	-8.7	1.76 H	26	50.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

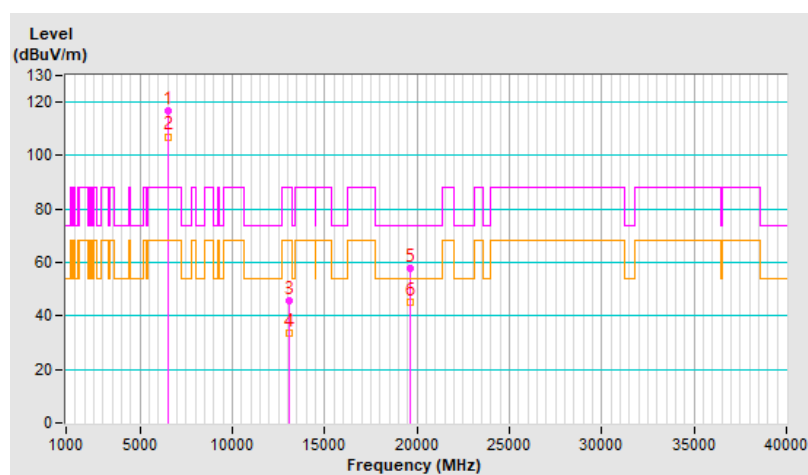


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.2 PK			1.21 V	246	105.8	7.4
2	*6535.00	102.7 AV			1.21 V	246	95.3	7.4
3	#13070.00	45.1 PK	88.2	-43.1	1.61 V	99	30.0	15.1
4	#13070.00	33.2 AV	68.2	-35.0	1.61 V	99	18.1	15.1
5	19605.00	59.7 PK	74.0	-14.3	1.79 V	52	64.5	-4.8
6	19605.00	47.0 AV	54.0	-7.0	1.79 V	52	51.8	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

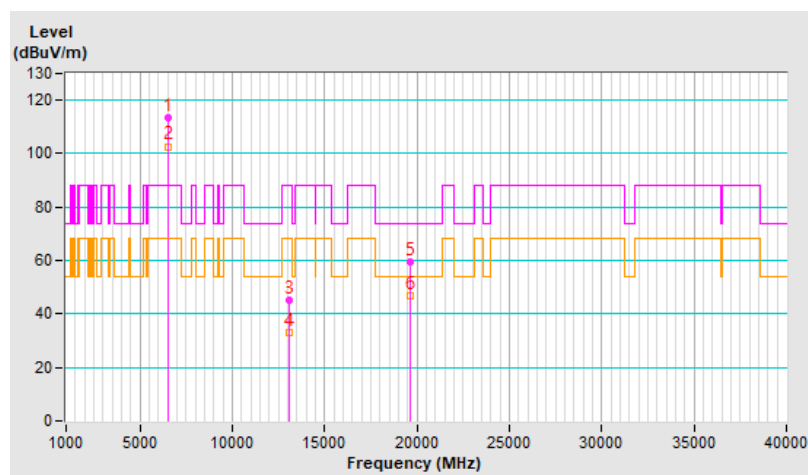


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.8 PK			1.71 H	167	110.6	8.2
2	*6855.00	107.2 AV			1.71 H	167	99.0	8.2
3	#13710.00	46.3 PK	88.2	-41.9	1.75 H	152	30.0	16.3
4	#13710.00	33.9 AV	68.2	-34.3	1.75 H	152	17.6	16.3
5	20565.00	57.6 PK	74.0	-16.4	1.78 H	12	61.3	-3.7
6	20565.00	44.7 AV	54.0	-9.3	1.78 H	12	48.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

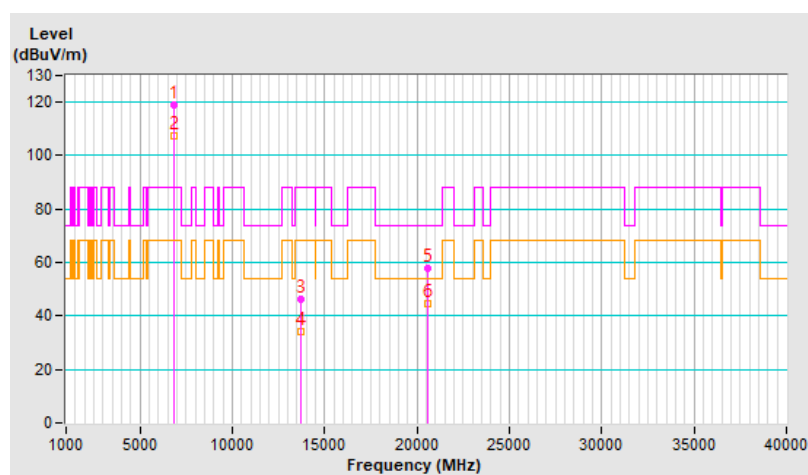


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.4 PK			1.74 V	58	107.2	8.2
2	*6855.00	103.8 AV			1.74 V	58	95.6	8.2
3	#13710.00	45.2 PK	88.2	-43.0	1.60 V	108	28.9	16.3
4	#13710.00	33.7 AV	68.2	-34.5	1.60 V	108	17.4	16.3
5	20565.00	59.7 PK	74.0	-14.3	1.74 V	23	63.4	-3.7
6	20565.00	46.9 AV	54.0	-7.1	1.74 V	23	50.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

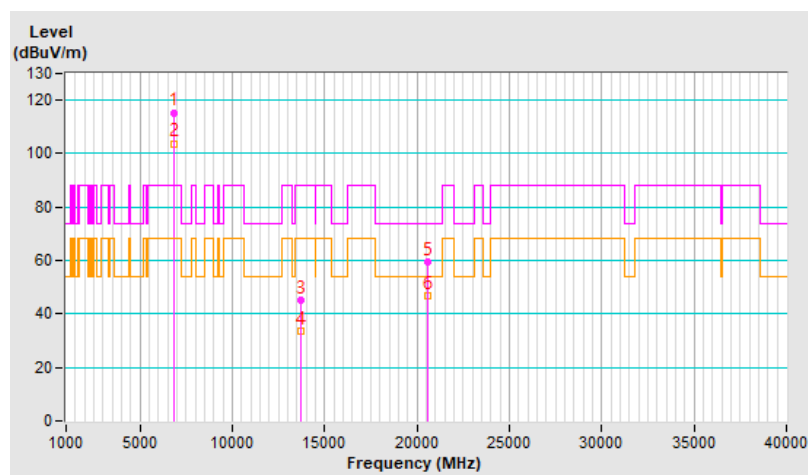


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	2.02 H	174	70.7	5.6
2	#5925.00	56.2 AV	68.2	-12.0	2.02 H	174	50.6	5.6
3	*5985.00	109.2 PK			2.02 H	174	103.7	5.5
4	*5985.00	98.1 AV			2.02 H	174	92.6	5.5
5	11970.00	46.4 PK	74.0	-27.6	1.69 H	157	31.9	14.5
6	11970.00	33.9 AV	54.0	-20.1	1.69 H	157	19.4	14.5
7	17955.00	57.7 PK	74.0	-16.3	1.83 H	16	29.4	28.3
8	17955.00	44.7 AV	54.0	-9.3	1.83 H	16	16.4	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

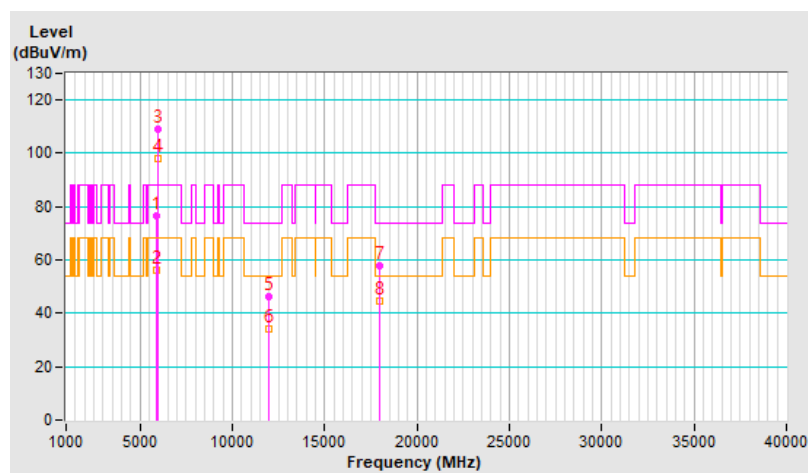


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.8 PK	88.2	-20.4	1.34 V	230	62.2	5.6
2	#5925.00	49.6 AV	68.2	-18.6	1.34 V	230	44.0	5.6
3	*5985.00	104.8 PK			1.34 V	230	99.3	5.5
4	*5985.00	91.9 AV			1.34 V	230	86.4	5.5
5	11970.00	45.5 PK	74.0	-28.5	1.59 V	103	31.0	14.5
6	11970.00	33.6 AV	54.0	-20.4	1.59 V	103	19.1	14.5
7	17955.00	59.9 PK	74.0	-14.1	1.71 V	30	31.6	28.3
8	17955.00	46.9 AV	54.0	-7.1	1.71 V	30	18.6	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

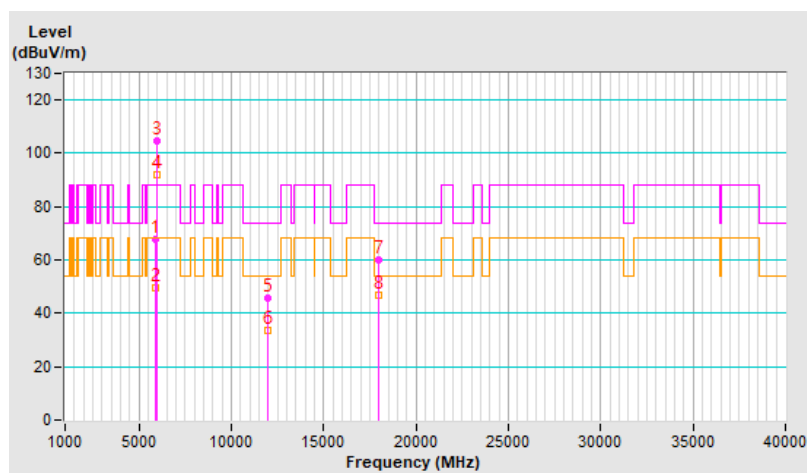


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.5 PK			1.96 H	169	102.9	6.6
2	*6385.00	98.2 AV			1.96 H	169	91.6	6.6
3	#12770.00	46.6 PK	88.2	-41.6	1.82 H	132	31.7	14.9
4	#12770.00	34.2 AV	68.2	-34.0	1.82 H	132	19.3	14.9
5	19155.00	57.6 PK	74.0	-16.4	1.79 H	6	62.3	-4.7
6	19155.00	45.1 AV	54.0	-8.9	1.79 H	6	49.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

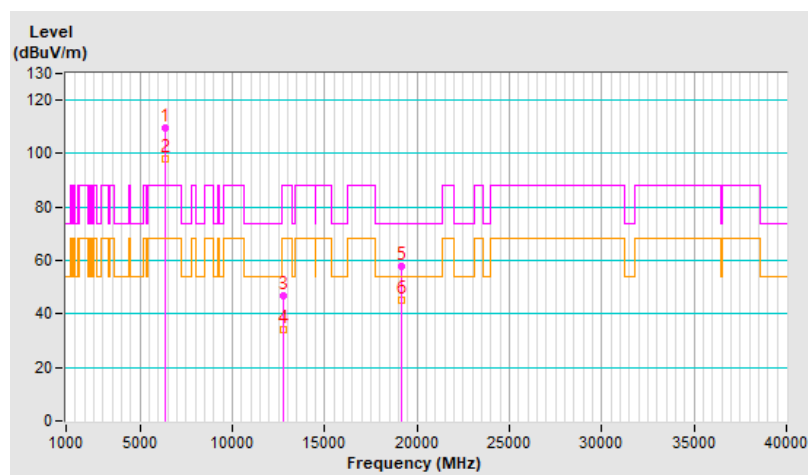


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	104.4 PK			1.30 V	245	97.8	6.6
2	*6385.00	91.6 AV			1.30 V	245	85.0	6.6
3	#12770.00	45.1 PK	88.2	-43.1	1.57 V	103	30.2	14.9
4	#12770.00	33.4 AV	68.2	-34.8	1.57 V	103	18.5	14.9
5	19155.00	59.8 PK	74.0	-14.2	1.70 V	22	64.5	-4.7
6	19155.00	47.0 AV	54.0	-7.0	1.70 V	22	51.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

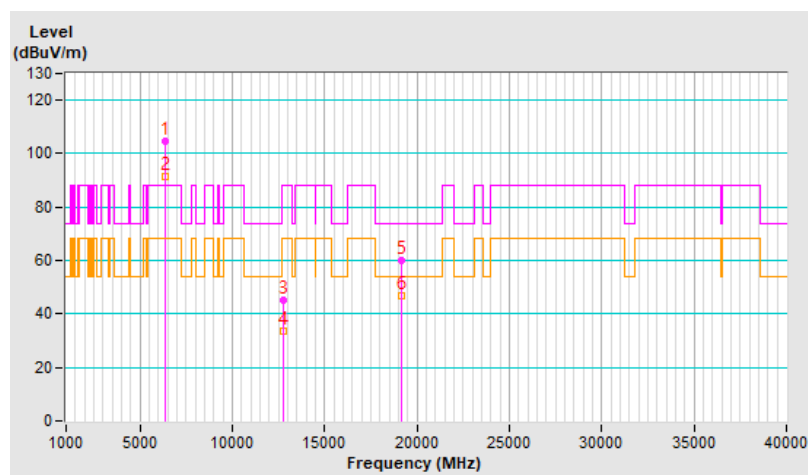


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.6 PK			1.98 H	186	101.8	7.8
2	*6625.00	98.3 AV			1.98 H	186	90.5	7.8
3	13250.00	45.7 PK	74.0	-28.3	1.84 H	149	30.3	15.4
4	13250.00	33.6 AV	54.0	-20.4	1.84 H	149	18.2	15.4
5	19875.00	57.4 PK	74.0	-16.6	1.79 H	27	61.9	-4.5
6	19875.00	44.8 AV	54.0	-9.2	1.79 H	27	49.3	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

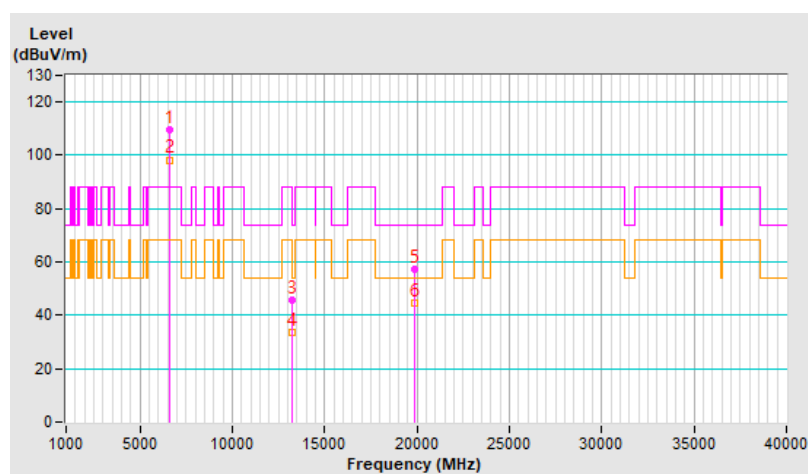


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	104.8 PK			1.30 V	220	97.0	7.8
2	*6625.00	92.0 AV			1.30 V	220	84.2	7.8
3	13250.00	45.3 PK	74.0	-28.7	1.65 V	99	29.9	15.4
4	13250.00	33.8 AV	54.0	-20.2	1.65 V	99	18.4	15.4
5	19875.00	59.5 PK	74.0	-14.5	1.75 V	50	64.0	-4.5
6	19875.00	46.7 AV	54.0	-7.3	1.75 V	50	51.2	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

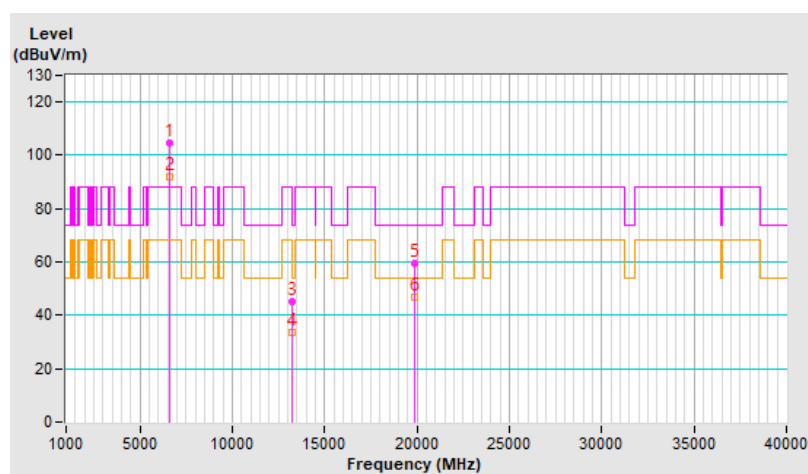


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	114.6 PK			1.90 H	168	106.9	7.7
2	*6785.00	102.1 AV			1.90 H	168	94.4	7.7
3	#13570.00	46.4 PK	88.2	-41.8	1.77 H	150	30.7	15.7
4	#13570.00	34.2 AV	68.2	-34.0	1.77 H	150	18.5	15.7
5	20355.00	57.9 PK	74.0	-16.1	1.80 H	6	61.7	-3.8
6	20355.00	44.9 AV	54.0	-9.1	1.80 H	6	48.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

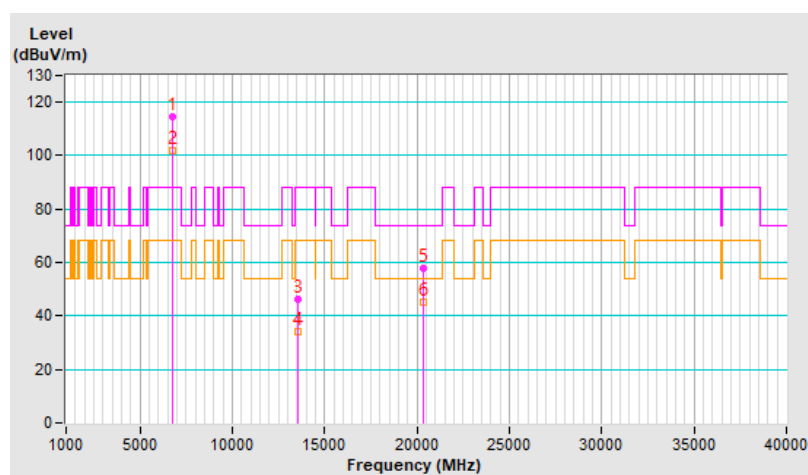


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.7 PK			1.71 V	56	102.0	7.7
2	*6785.00	97.6 AV			1.71 V	56	89.9	7.7
3	#13570.00	45.5 PK	88.2	-42.7	1.64 V	101	29.8	15.7
4	#13570.00	33.6 AV	68.2	-34.6	1.64 V	101	17.9	15.7
5	20355.00	60.2 PK	74.0	-13.8	1.74 V	38	64.0	-3.8
6	20355.00	47.2 AV	54.0	-6.8	1.74 V	38	51.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

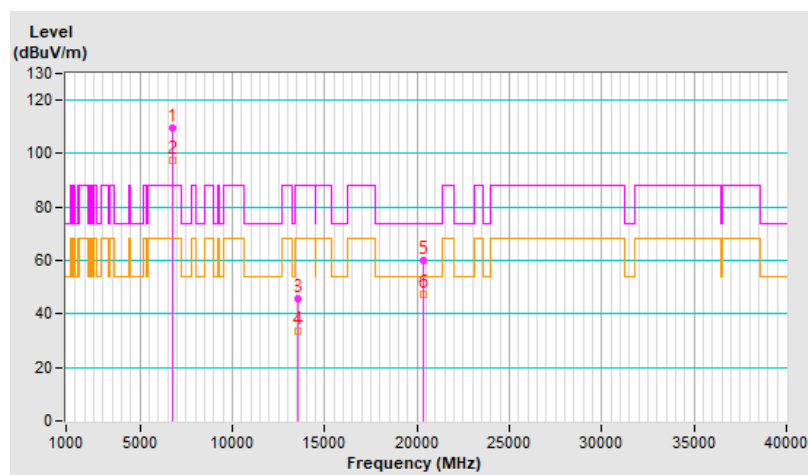


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#6020.06	85.2 PK	88.2	-3.0	1.92 H	171	79.6	5.6
2	#6020.06	64.3 AV	68.2	-3.9	1.92 H	171	58.7	5.6
3	*6025.00	107.4 PK			1.92 H	171	101.8	5.6
4	*6025.00	96.2 AV			1.92 H	171	90.6	5.6
5	12050.00	46.3 PK	74.0	-27.7	1.81 H	131	31.7	14.6
6	12050.00	33.7 AV	54.0	-20.3	1.81 H	131	19.1	14.6
7	18075.00	57.9 PK	74.0	-16.1	1.78 H	12	63.2	-5.3
8	18075.00	45.0 AV	54.0	-9.0	1.78 H	12	50.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

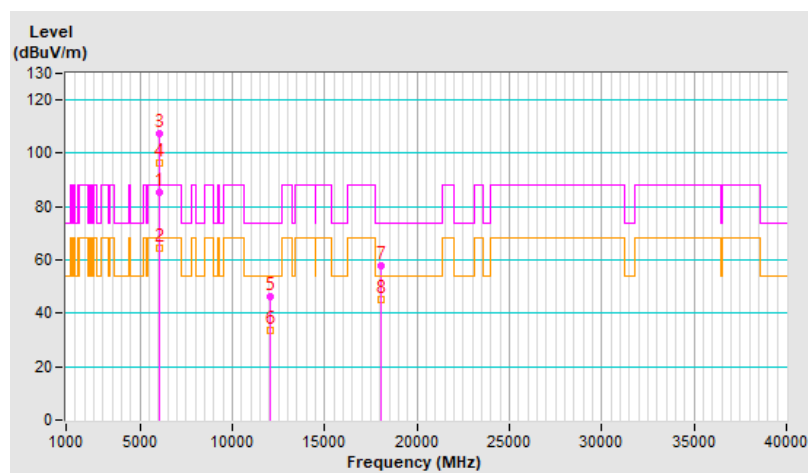


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5832.70	83.3 PK	88.2	-4.9	1.70 V	228	78.0	5.3
2	#5832.70	59.7 AV	68.2	-8.5	1.70 V	228	54.4	5.3
3	*6025.00	103.4 PK			1.70 V	228	97.8	5.6
4	*6025.00	91.8 AV			1.70 V	228	86.2	5.6
5	12050.00	45.1 PK	74.0	-28.9	1.67 V	102	30.5	14.6
6	12050.00	33.3 AV	54.0	-20.7	1.67 V	102	18.7	14.6
7	18075.00	59.4 PK	74.0	-14.6	1.72 V	25	64.7	-5.3
8	18075.00	46.4 AV	54.0	-7.6	1.72 V	25	51.7	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

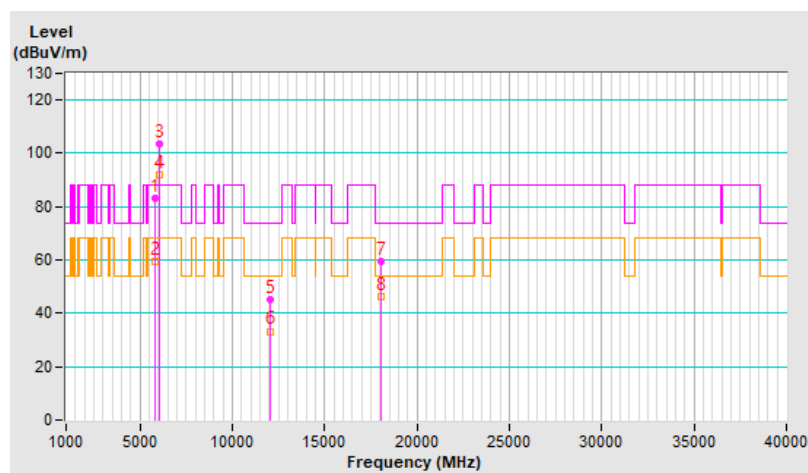


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.3 PK			1.98 H	173	100.9	6.4
2	*6345.00	96.1 AV			1.98 H	173	89.7	6.4
3	12690.00	46.1 PK	74.0	-27.9	1.79 H	149	31.2	14.9
4	12690.00	33.9 AV	54.0	-20.1	1.79 H	149	19.0	14.9
5	19035.00	57.8 PK	74.0	-16.2	1.85 H	11	62.7	-4.9
6	19035.00	45.0 AV	54.0	-9.0	1.85 H	11	49.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

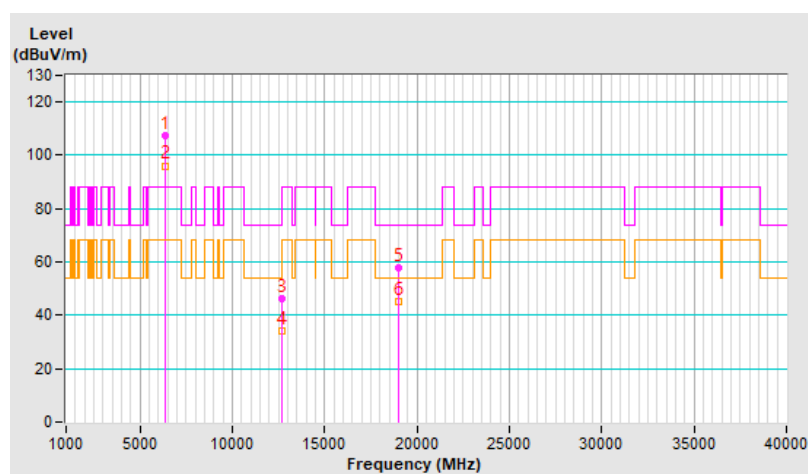


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	103.0 PK			1.75 V	240	96.6	6.4
2	*6345.00	91.4 AV			1.75 V	240	85.0	6.4
3	12690.00	44.9 PK	74.0	-29.1	1.62 V	104	30.0	14.9
4	12690.00	33.2 AV	54.0	-20.8	1.62 V	104	18.3	14.9
5	19035.00	59.4 PK	74.0	-14.6	1.79 V	30	64.3	-4.9
6	19035.00	46.7 AV	54.0	-7.3	1.79 V	30	51.6	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

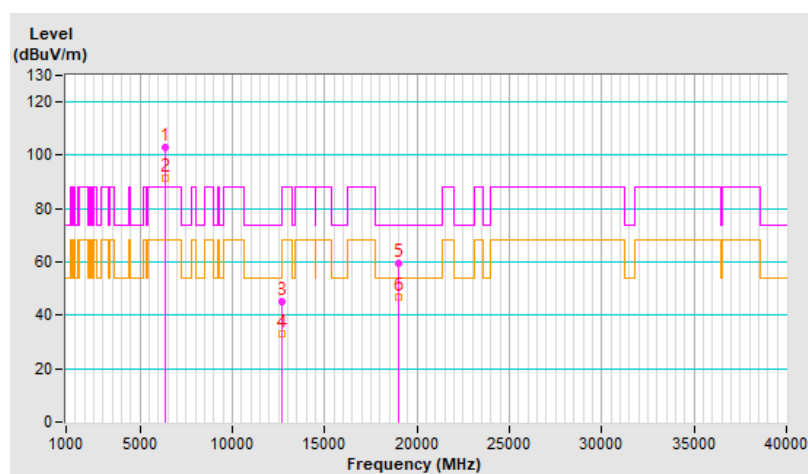


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.5 PK			1.83 H	170	100.7	7.8
2	*6665.00	95.6 AV			1.83 H	170	87.8	7.8
3	13330.00	46.1 PK	74.0	-27.9	1.76 H	131	30.8	15.3
4	13330.00	33.8 AV	54.0	-20.2	1.76 H	131	18.5	15.3
5	19995.00	58.2 PK	74.0	-15.8	1.82 H	5	62.6	-4.4
6	19995.00	45.4 AV	54.0	-8.6	1.82 H	5	49.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

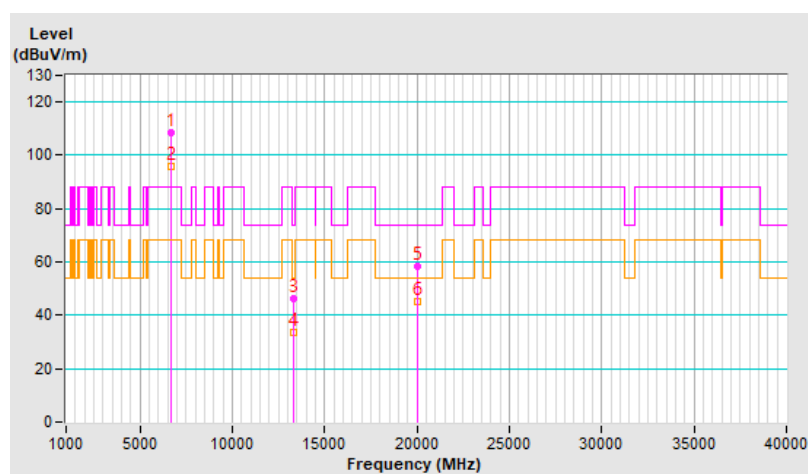


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	93.0 PK			1.81 V	52	85.2	7.8
2	*6665.00	81.2 AV			1.81 V	52	73.4	7.8
3	13330.00	45.5 PK	74.0	-28.5	1.61 V	101	30.2	15.3
4	13330.00	33.7 AV	54.0	-20.3	1.61 V	101	18.4	15.3
5	19995.00	59.7 PK	74.0	-14.3	1.71 V	45	64.1	-4.4
6	19995.00	46.5 AV	54.0	-7.5	1.71 V	45	50.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

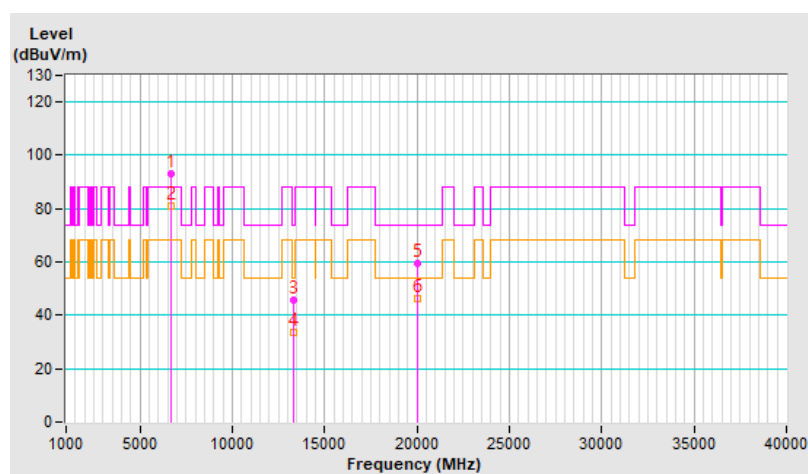


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.1 PK	88.2	-3.1	1.92 H	173	79.5	5.6
2	#5925.00	62.5 AV	68.2	-5.7	1.92 H	173	56.9	5.6
3	*6025.00	106.9 PK			1.92 H	173	101.3	5.6
4	*6025.00	95.4 AV			1.92 H	173	89.8	5.6
5	12050.00	46.2 PK	74.0	-27.8	1.81 H	154	31.6	14.6
6	12050.00	33.8 AV	54.0	-20.2	1.81 H	154	19.2	14.6
7	18075.00	57.8 PK	74.0	-16.2	1.84 H	13	63.1	-5.3
8	18075.00	45.3 AV	54.0	-8.7	1.84 H	13	50.6	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

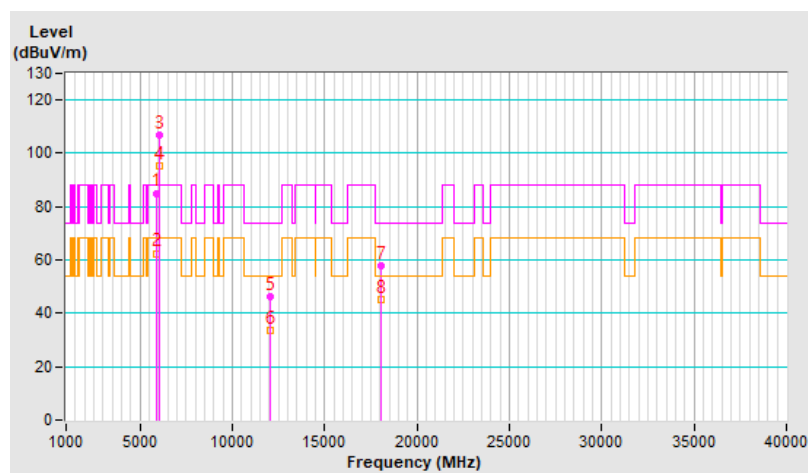


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.4 PK	88.2	-19.8	1.83 V	228	62.8	5.6
2	#5925.00	48.1 AV	68.2	-20.1	1.83 V	228	42.5	5.6
3	*6025.00	92.2 PK			1.83 V	228	86.6	5.6
4	*6025.00	81.0 AV			1.83 V	228	75.4	5.6
5	12050.00	44.6 PK	74.0	-29.4	1.63 V	97	30.0	14.6
6	12050.00	32.9 AV	54.0	-21.1	1.63 V	97	18.3	14.6
7	18075.00	59.5 PK	74.0	-14.5	1.75 V	22	64.8	-5.3
8	18075.00	46.6 AV	54.0	-7.4	1.75 V	22	51.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

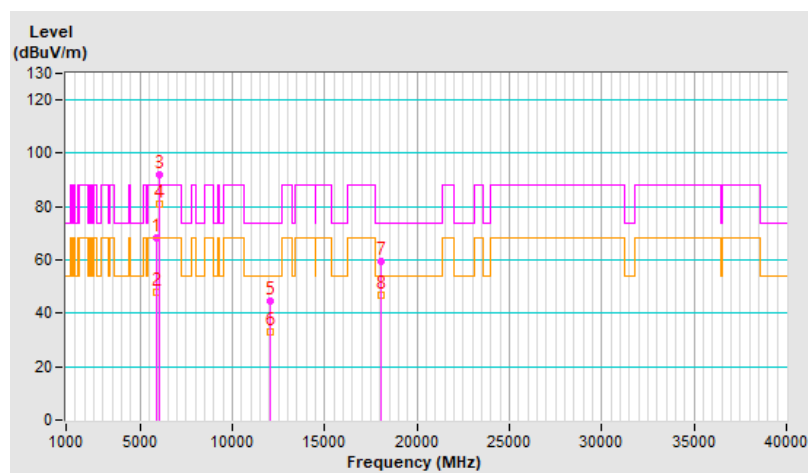


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.4 PK			1.95 H	185	101.0	6.4
2	*6345.00	95.8 AV			1.95 H	185	89.4	6.4
3	12690.00	45.9 PK	74.0	-28.1	1.75 H	152	31.0	14.9
4	12690.00	33.6 AV	54.0	-20.4	1.75 H	152	18.7	14.9
5	19035.00	58.1 PK	74.0	-15.9	1.83 H	17	63.0	-4.9
6	19035.00	45.2 AV	54.0	-8.8	1.83 H	17	50.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

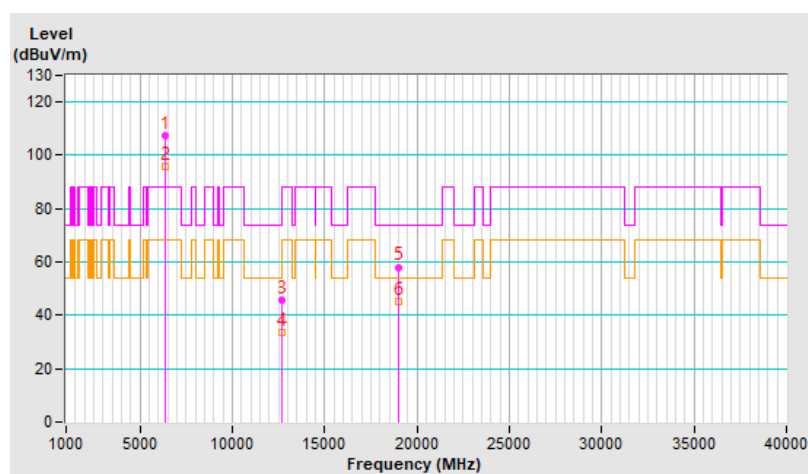


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	92.3 PK			1.84 V	224	85.9	6.4
2	*6345.00	81.1 AV			1.84 V	224	74.7	6.4
3	12690.00	44.7 PK	74.0	-29.3	1.64 V	114	29.8	14.9
4	12690.00	33.1 AV	54.0	-20.9	1.64 V	114	18.2	14.9
5	19035.00	59.7 PK	74.0	-14.3	1.74 V	42	64.6	-4.9
6	19035.00	46.8 AV	54.0	-7.2	1.74 V	42	51.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

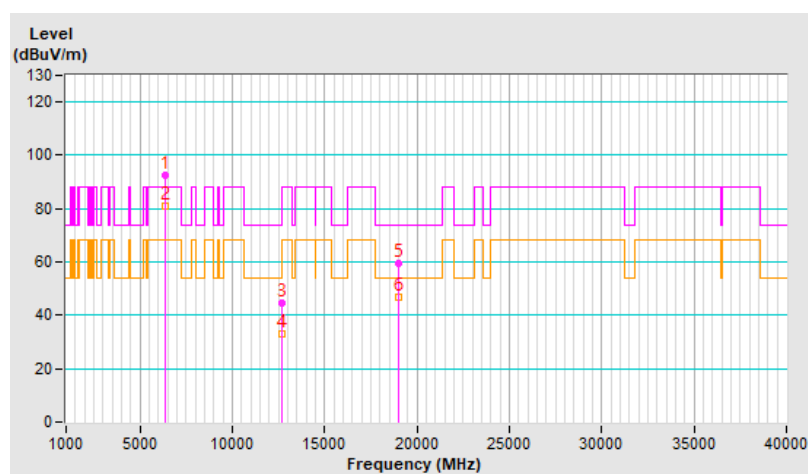


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.0 PK			1.94 H	171	98.2	7.8
2	*6665.00	95.1 AV			1.94 H	171	87.3	7.8
3	13330.00	46.9 PK	74.0	-27.1	1.79 H	156	31.6	15.3
4	13330.00	34.3 AV	54.0	-19.7	1.79 H	156	19.0	15.3
5	19995.00	57.9 PK	74.0	-16.1	1.78 H	15	62.3	-4.4
6	19995.00	44.9 AV	54.0	-9.1	1.78 H	15	49.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

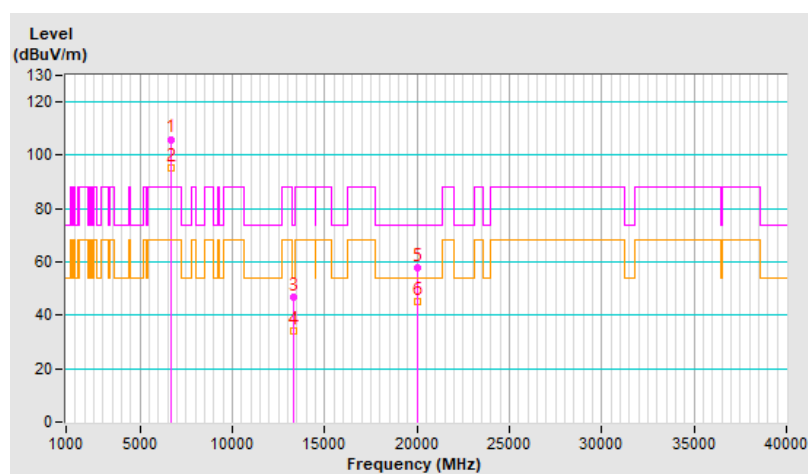


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	93.2 PK			1.83 V	51	85.4	7.8
2	*6665.00	81.6 AV			1.83 V	51	73.8	7.8
3	13330.00	45.8 PK	74.0	-28.2	1.55 V	101	30.5	15.3
4	13330.00	33.8 AV	54.0	-20.2	1.55 V	101	18.5	15.3
5	19995.00	59.4 PK	74.0	-14.6	1.75 V	52	63.8	-4.4
6	19995.00	46.8 AV	54.0	-7.2	1.75 V	52	51.2	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

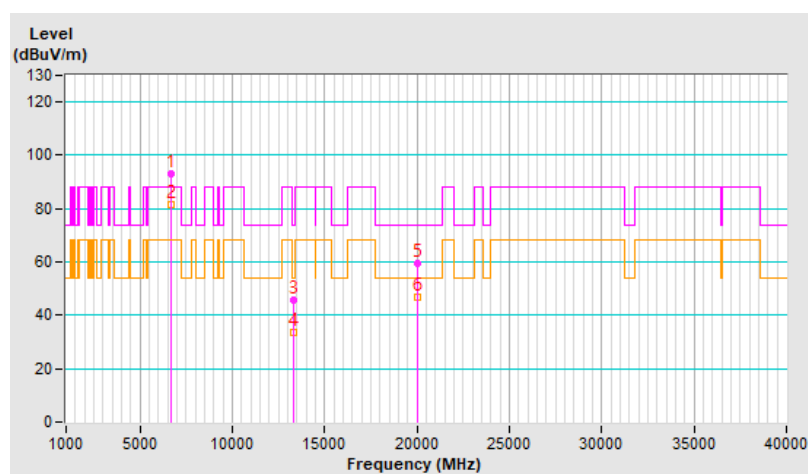


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

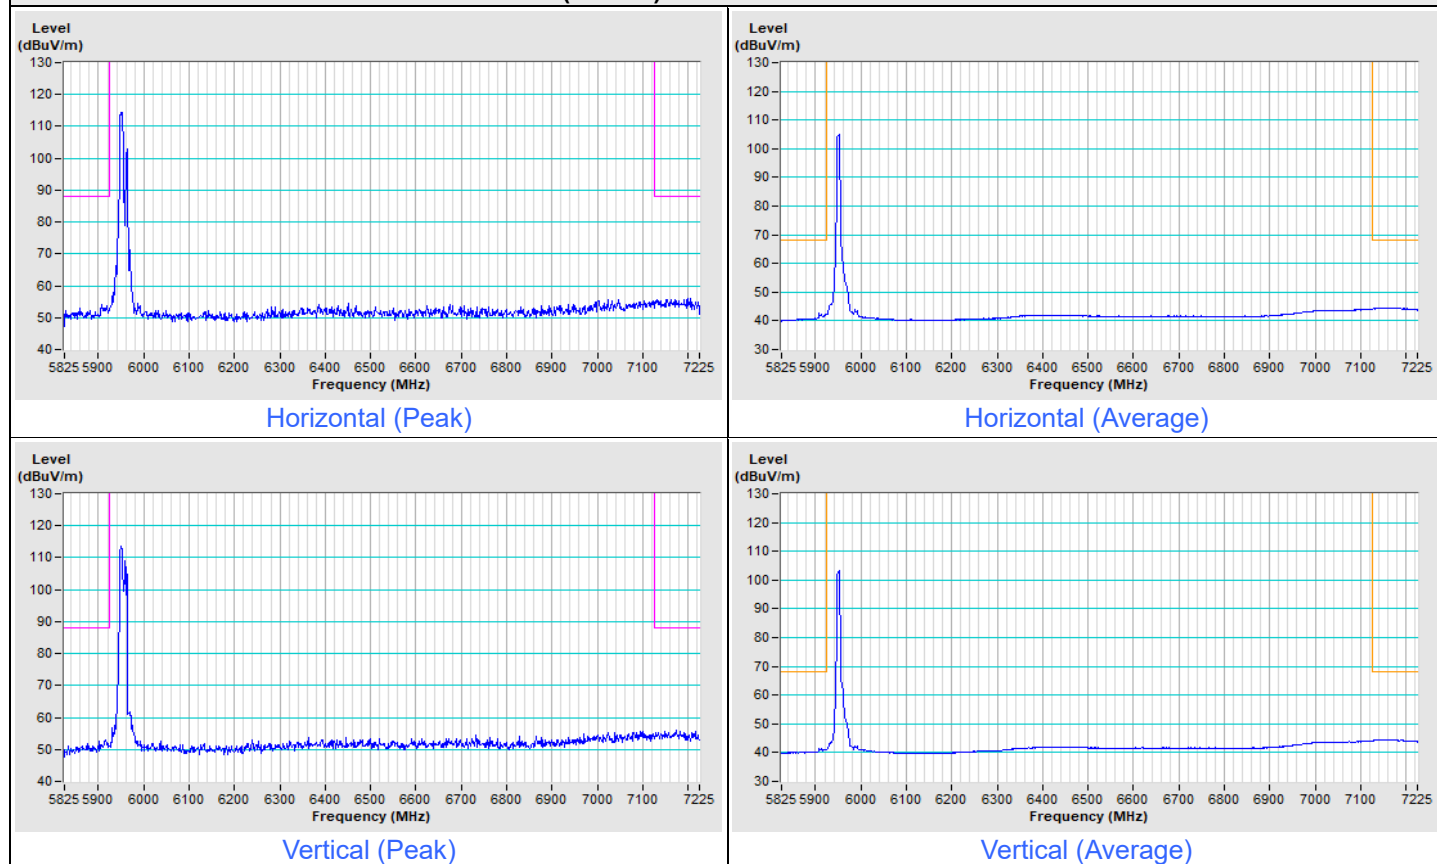


802.11be (EHT20) 52+26-tone MRU Channel 181

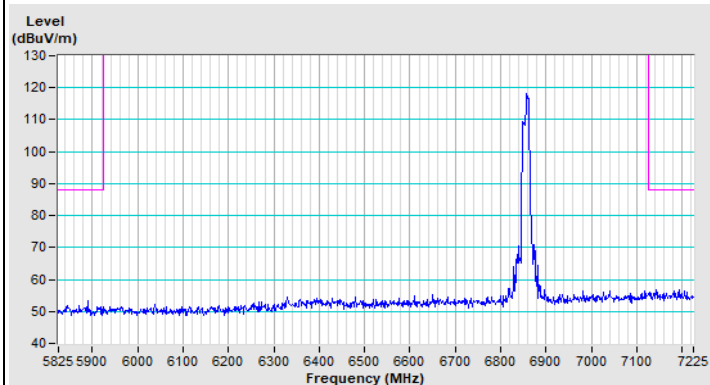


Horizontal (Peak)

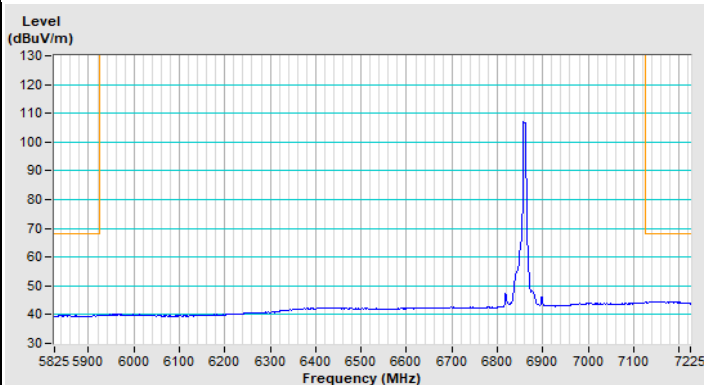

Horizontal (Average)

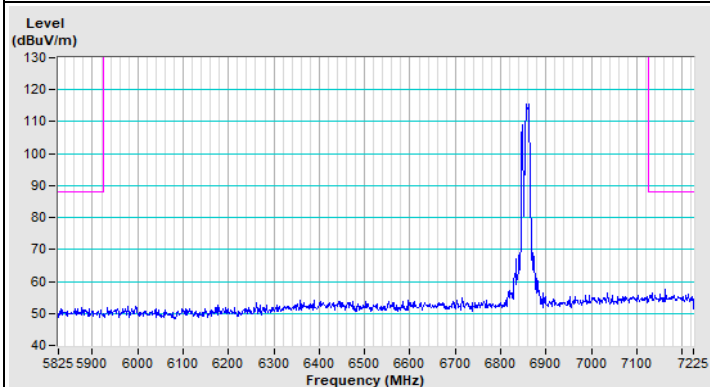


Vertical (Peak)

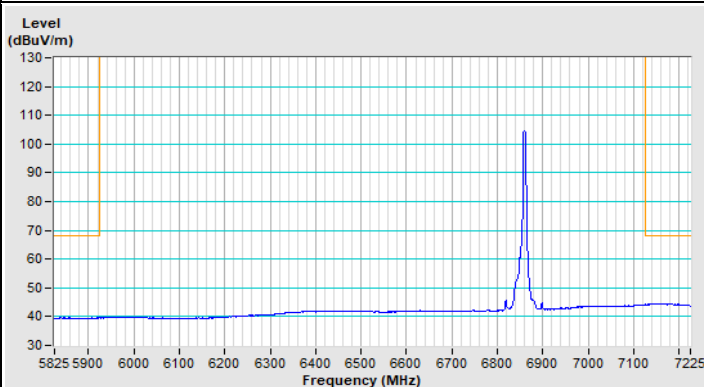


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

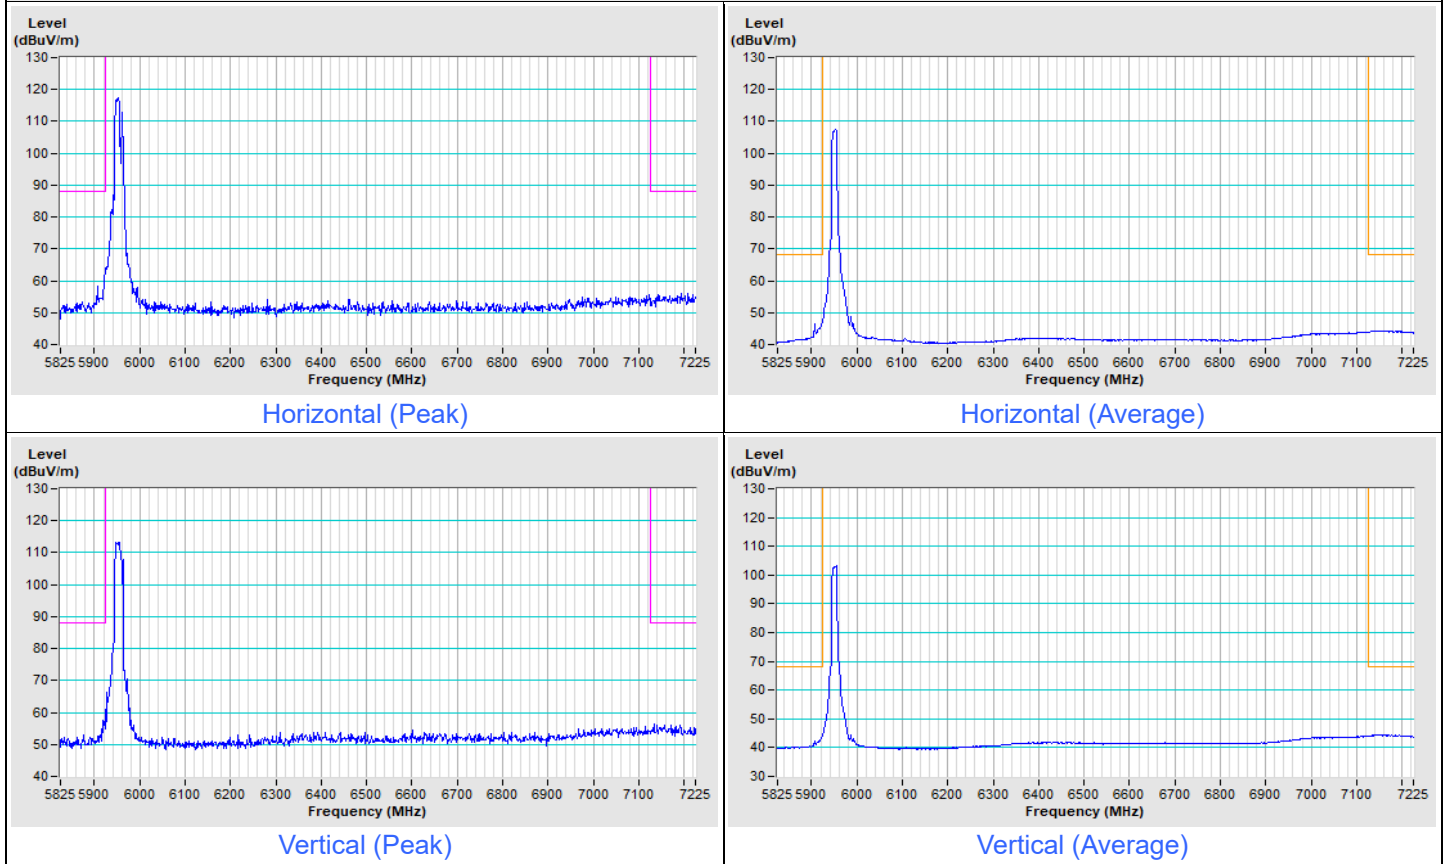


802.11be (EHT20) 106+26-tone MRU Channel 181

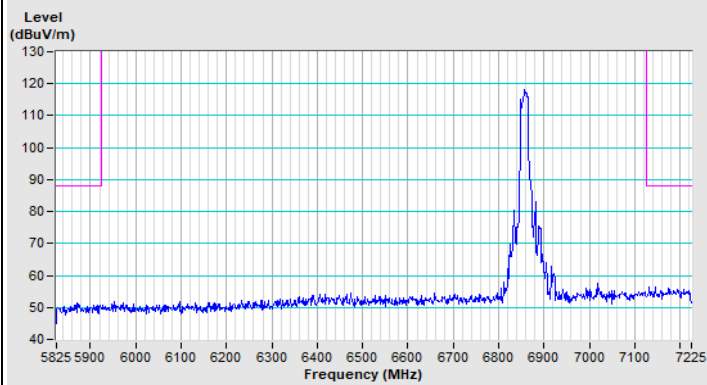


Horizontal (Peak)

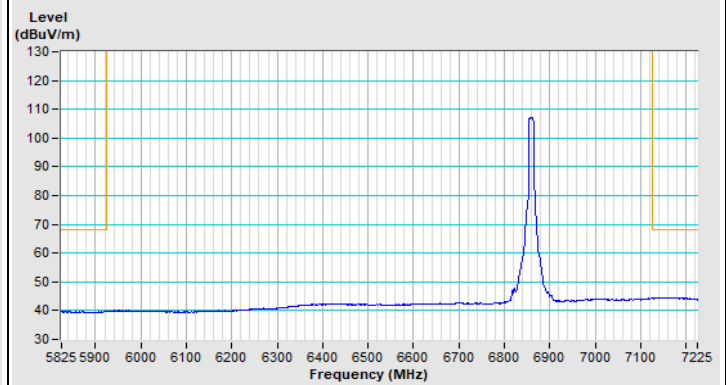

Horizontal (Average)

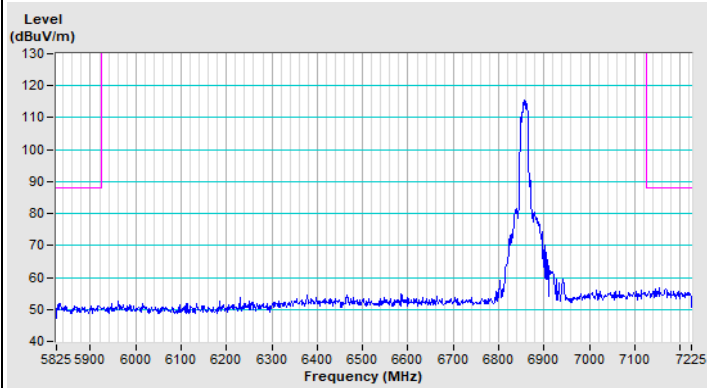


Vertical (Peak)

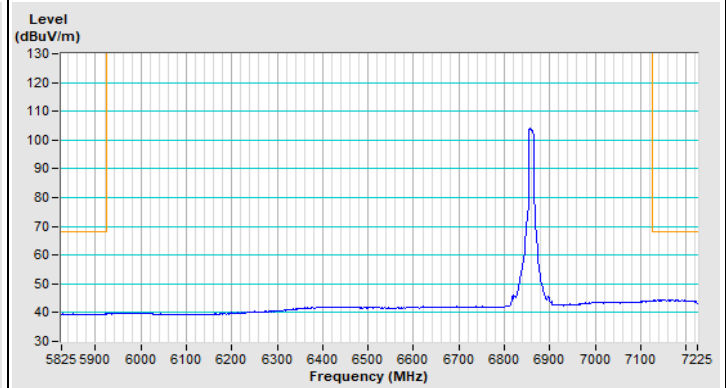


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

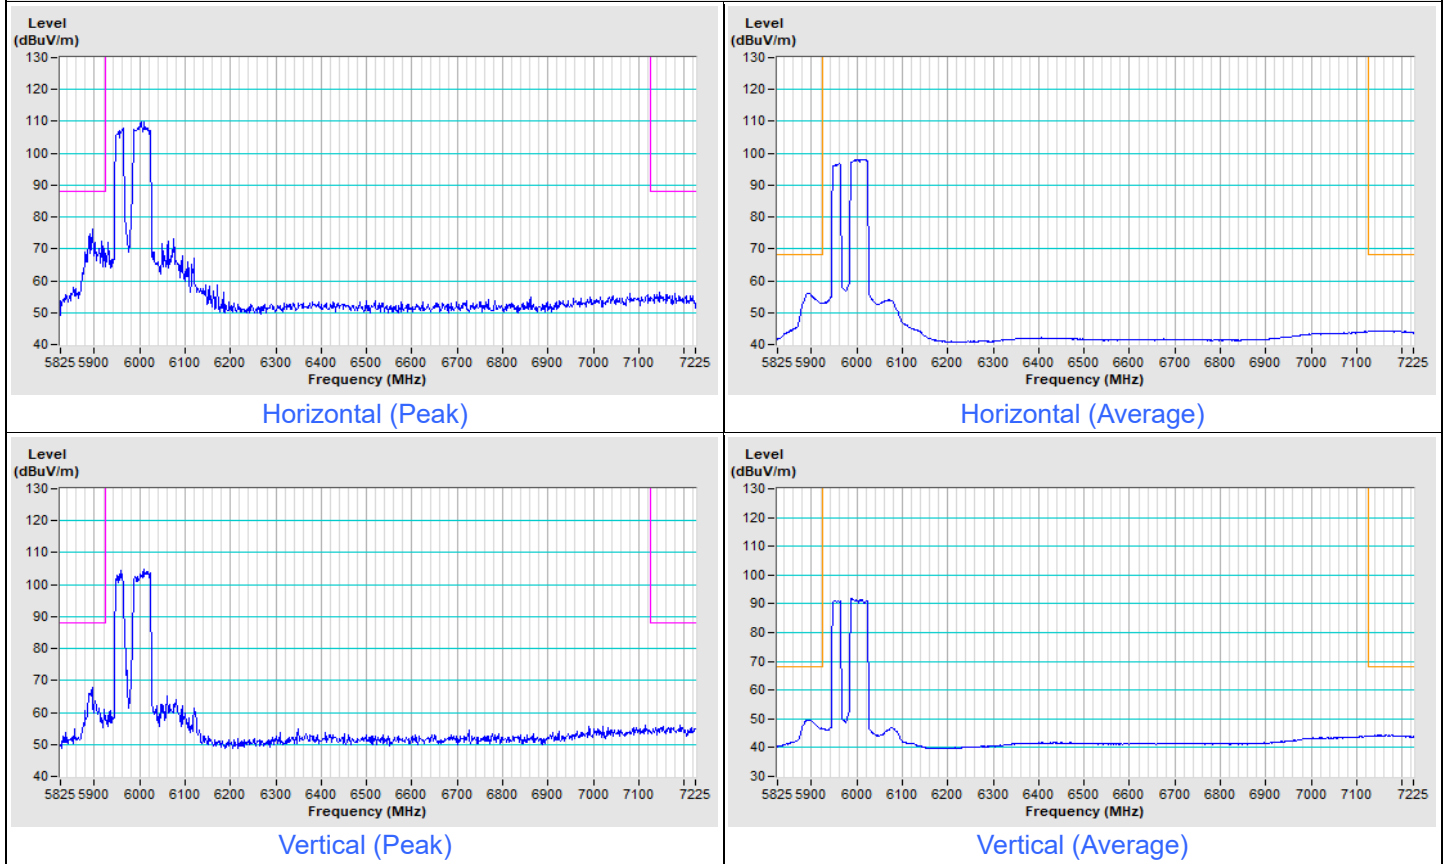


802.11be (EHT80) 484+242-tone MRU Channel 167

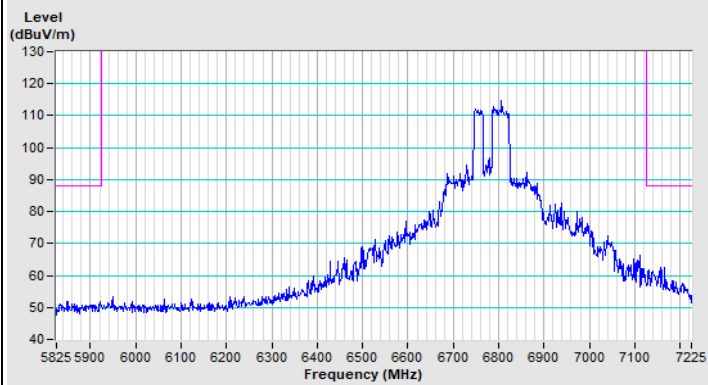


Horizontal (Peak)

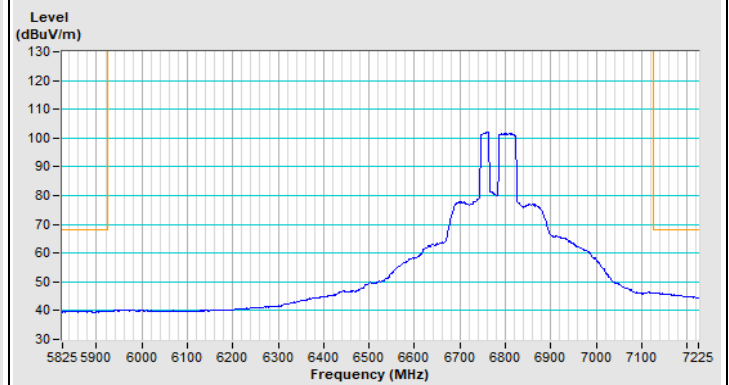

Horizontal (Average)

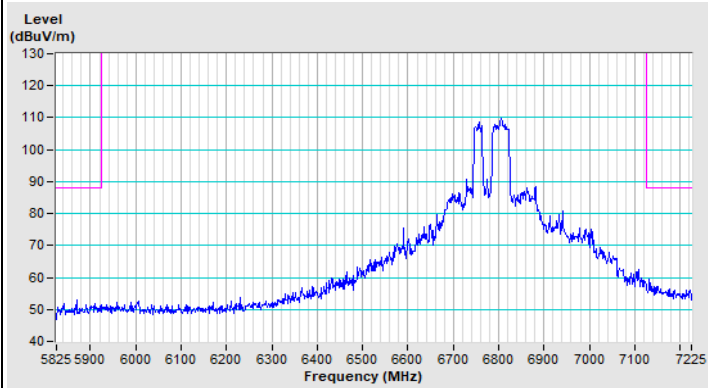


Vertical (Peak)

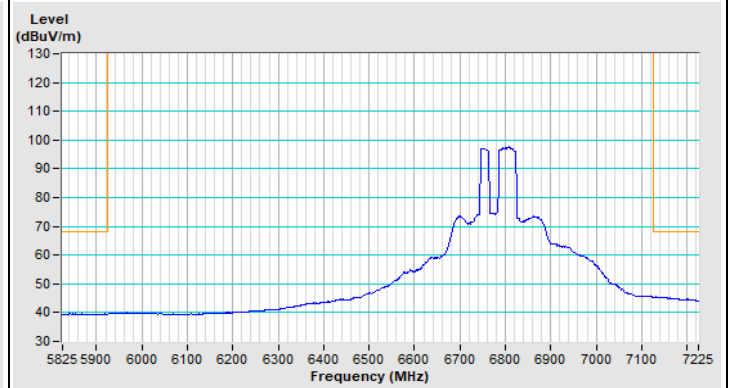


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

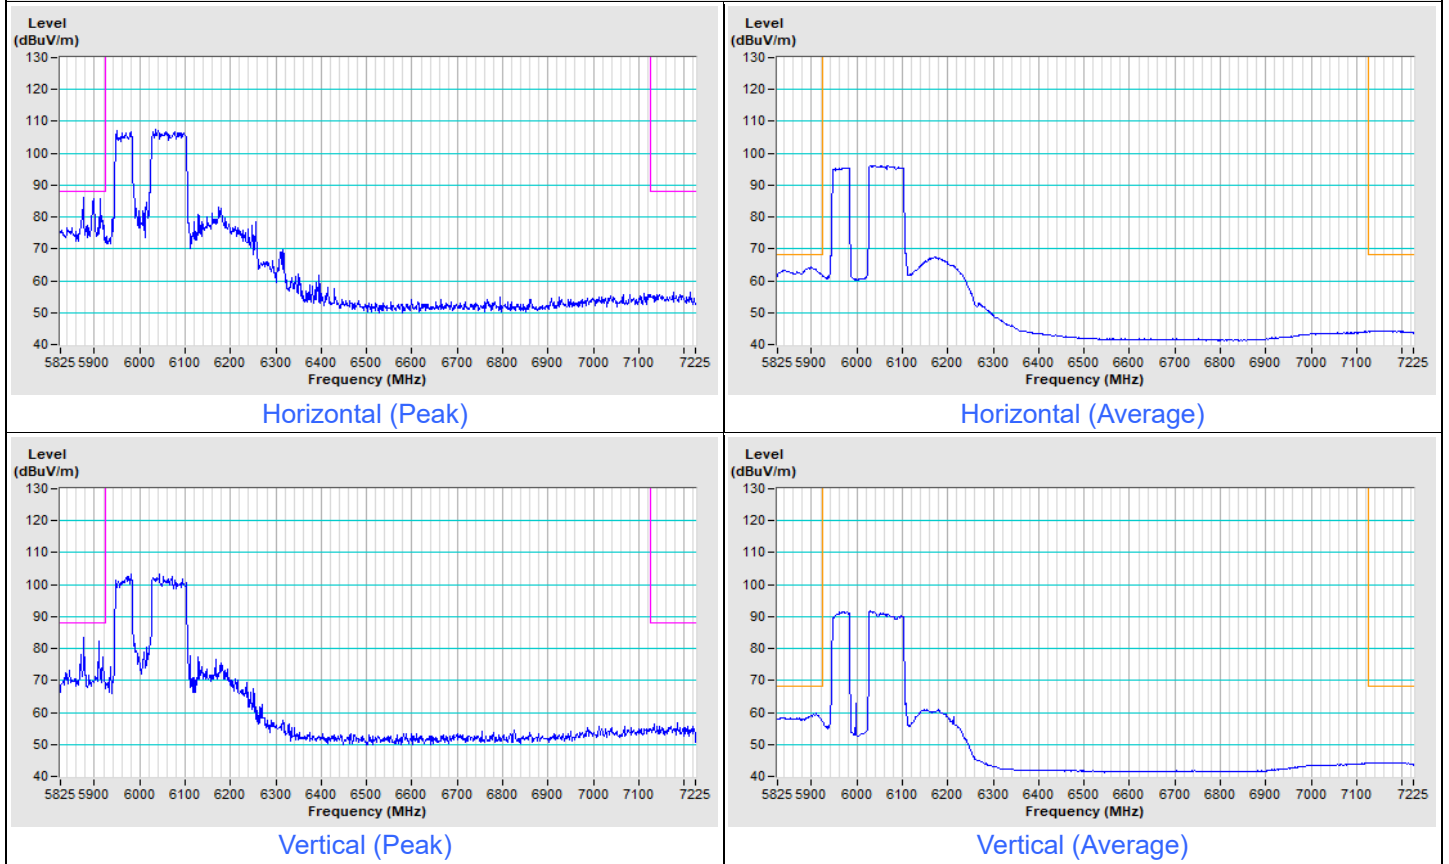


802.11be (EHT160) 996+484-tone MRU Channel 143

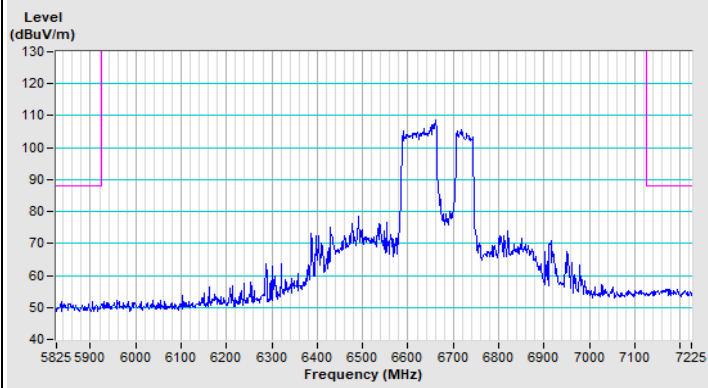


Horizontal (Peak)

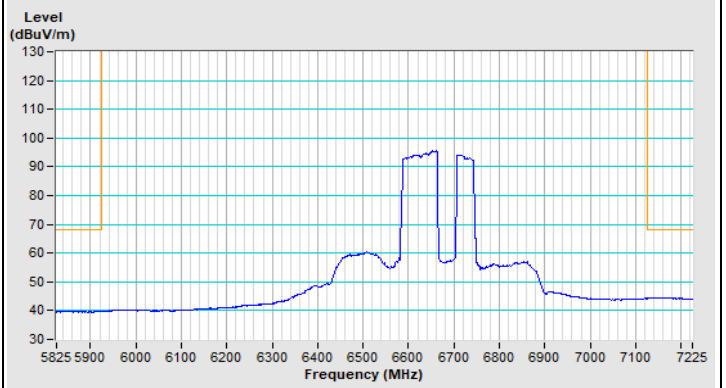

Horizontal (Average)

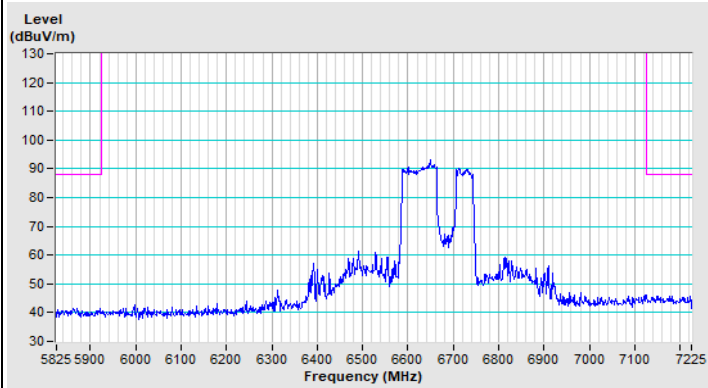


Vertical (Peak)

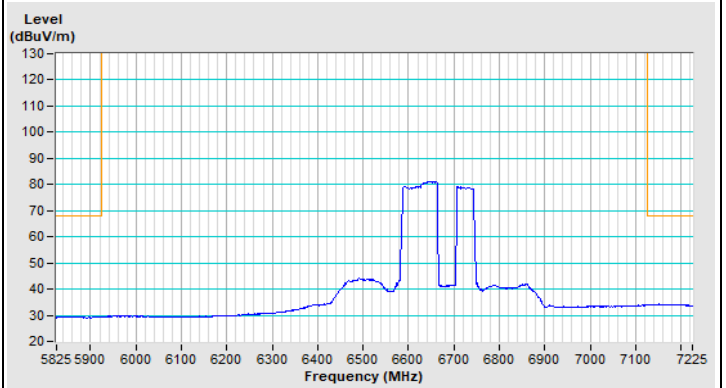


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

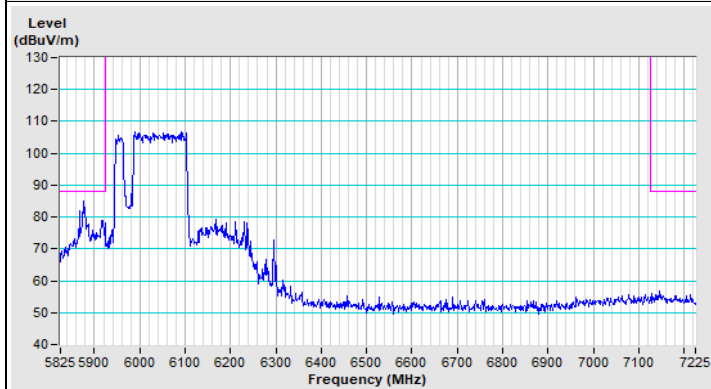


Horizontal (Peak)

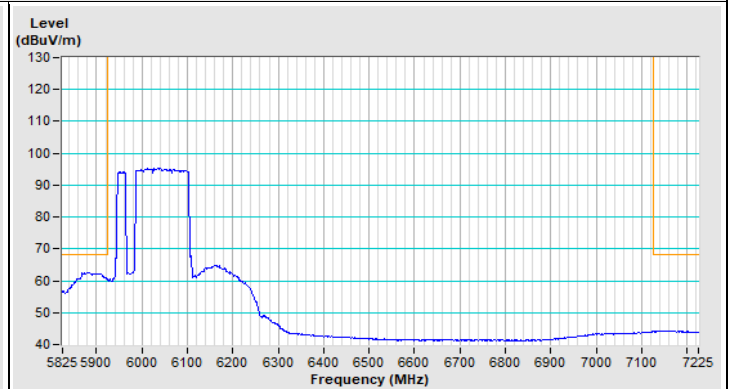

Horizontal (Average)

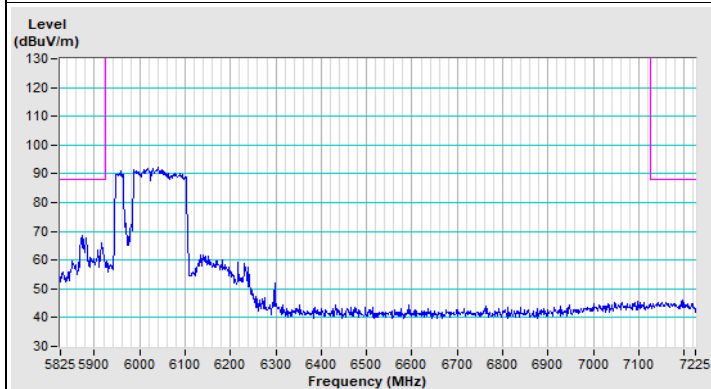


Vertical (Peak)

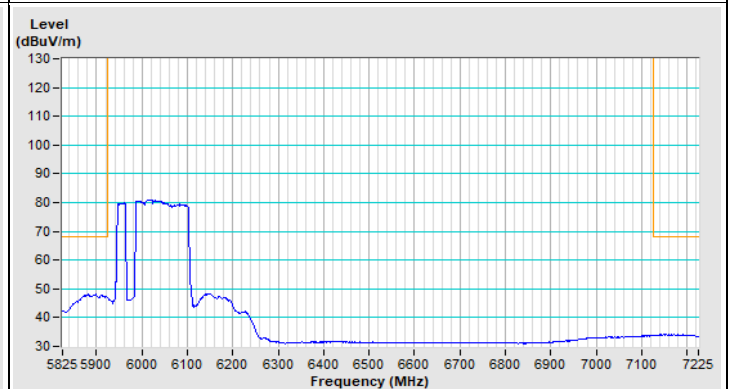


Vertical (Average)


802.11be (EHT160) 996+484+242-tone MRU Channel 143

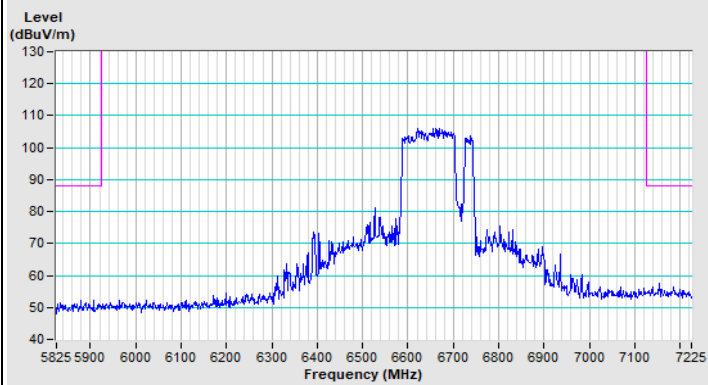


Horizontal (Peak)

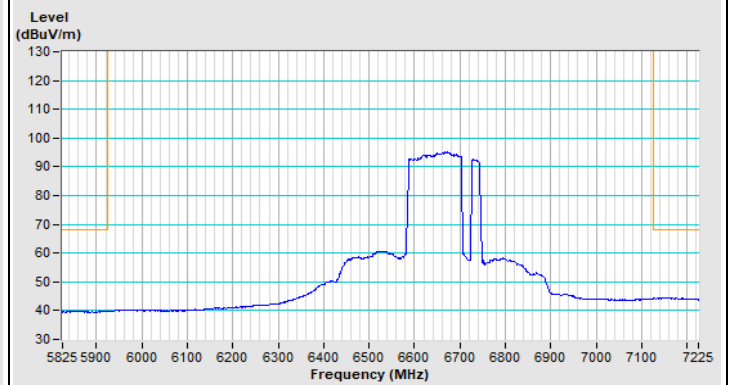

Horizontal (Average)

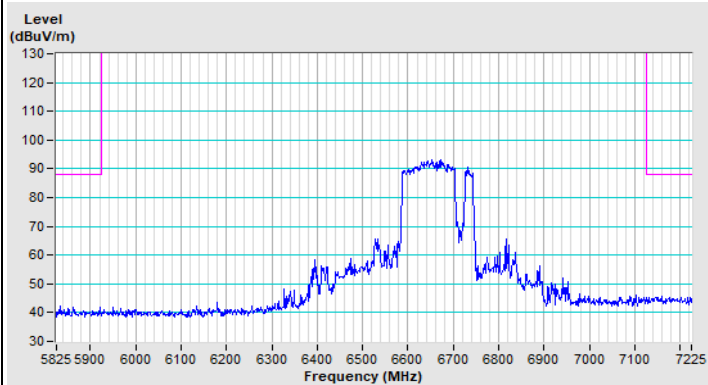

Vertical (Peak)

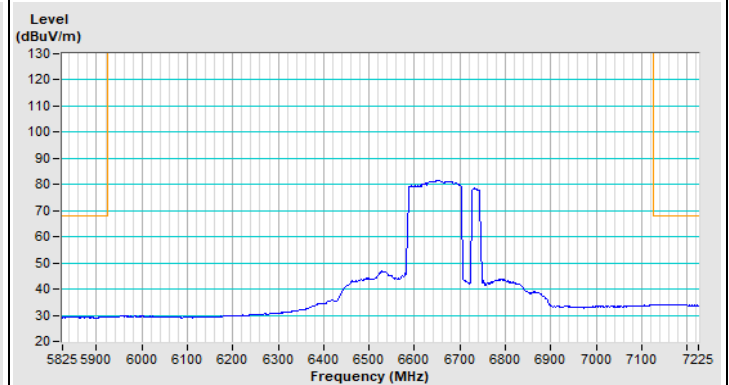

Vertical (Average)


Mode B_1TX

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.8 PK	88.2	-36.4	1.08 H	166	46.2	5.6
2	#5925.00	39.4 AV	68.2	-28.8	1.08 H	166	33.8	5.6
3	*5955.00	110.9 PK			1.08 H	166	105.4	5.5
4	*5955.00	94.1 AV			1.08 H	166	88.6	5.5
5	11910.00	46.4 PK	74.0	-27.6	1.52 H	73	31.8	14.6
6	11910.00	34.9 AV	54.0	-19.1	1.52 H	73	20.3	14.6
7	17865.00	54.5 PK	74.0	-19.5	1.86 H	360	28.6	25.9
8	17865.00	45.9 AV	54.0	-8.1	1.86 H	360	20.0	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

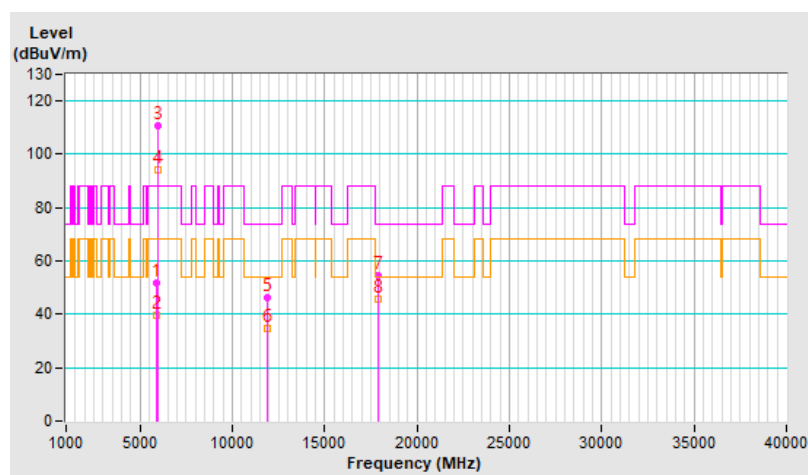


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.1 PK	88.2	-29.1	1.04 V	52	53.5	5.6
2	#5925.00	42.7 AV	68.2	-25.5	1.04 V	52	37.1	5.6
3	*5955.00	116.0 PK			1.04 V	52	110.5	5.5
4	*5955.00	106.1 AV			1.04 V	52	100.6	5.5
5	11910.00	49.7 PK	74.0	-24.3	1.08 V	33	35.1	14.6
6	11910.00	38.4 AV	54.0	-15.6	1.08 V	33	23.8	14.6
7	17865.00	57.1 PK	74.0	-16.9	1.97 V	360	31.2	25.9
8	17865.00	48.6 AV	54.0	-5.4	1.97 V	360	22.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

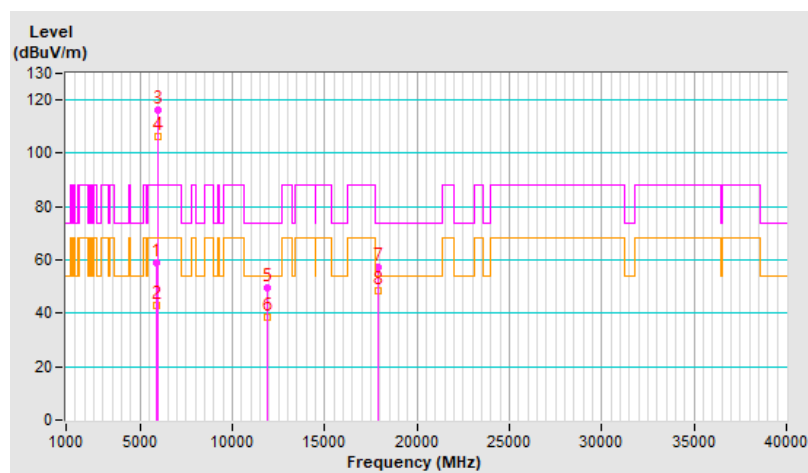


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.4 PK			1.13 H	150	104.6	6.8
2	*6415.00	94.4 AV			1.13 H	150	87.6	6.8
3	#12830.00	46.4 PK	88.2	-41.8	1.52 H	81	31.3	15.1
4	#12830.00	34.8 AV	68.2	-33.4	1.52 H	81	19.7	15.1
5	19245.00	54.9 PK	74.0	-19.1	1.86 H	360	59.5	-4.6
6	19245.00	46.4 AV	54.0	-7.6	1.86 H	360	51.0	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

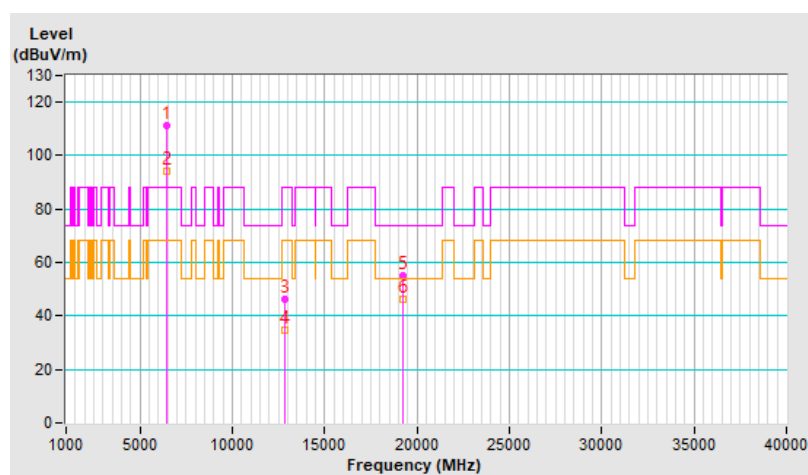


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.4 PK			1.00 V	52	108.6	6.8
2	*6415.00	105.6 AV			1.00 V	52	98.8	6.8
3	#12830.00	48.3 PK	88.2	-39.9	1.08 V	0	33.2	15.1
4	#12830.00	37.6 AV	68.2	-30.6	1.08 V	0	22.5	15.1
5	19245.00	57.0 PK	74.0	-17.0	1.92 V	360	61.6	-4.6
6	19245.00	48.7 AV	54.0	-5.3	1.92 V	360	53.3	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

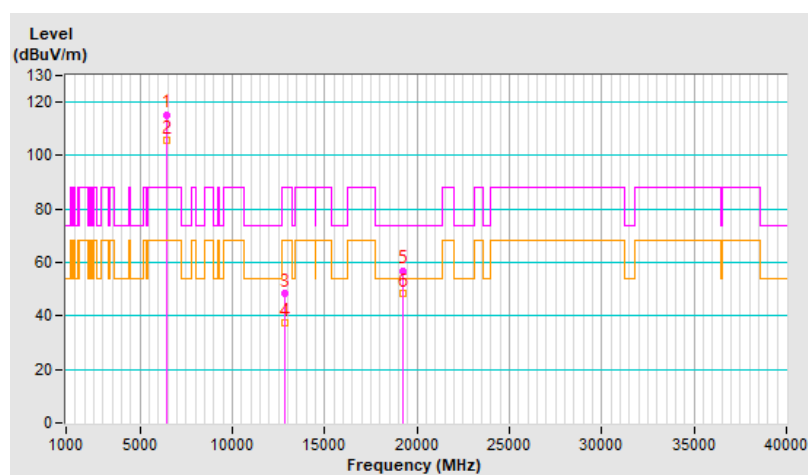


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.3 PK			1.06 H	153	103.9	7.4
2	*6535.00	94.3 AV			1.06 H	153	86.9	7.4
3	#13070.00	47.1 PK	88.2	-41.1	1.46 H	87	32.0	15.1
4	#13070.00	35.4 AV	68.2	-32.8	1.46 H	87	20.3	15.1
5	19605.00	54.7 PK	74.0	-19.3	1.93 H	360	59.5	-4.8
6	19605.00	46.2 AV	54.0	-7.8	1.93 H	360	51.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

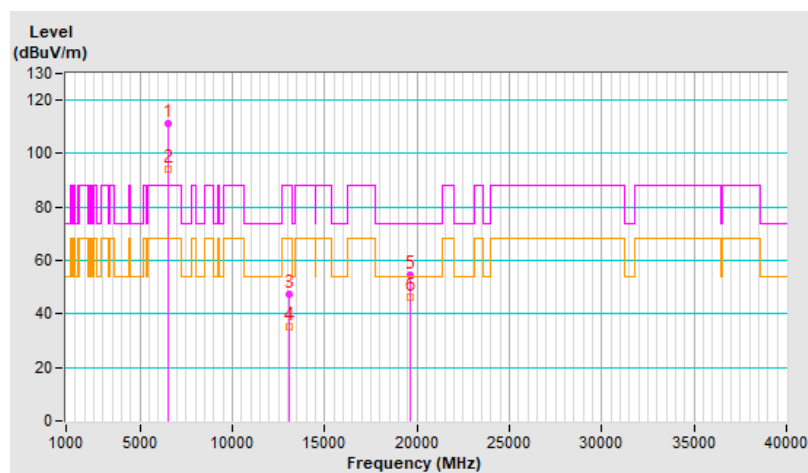


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.6 PK			1.00 V	60	108.2	7.4
2	*6535.00	105.8 AV			1.00 V	60	98.4	7.4
3	#13070.00	49.5 PK	88.2	-38.7	1.08 V	8	34.4	15.1
4	#13070.00	38.2 AV	68.2	-30.0	1.08 V	8	23.1	15.1
5	19605.00	56.3 PK	74.0	-17.7	1.95 V	360	61.1	-4.8
6	19605.00	48.2 AV	54.0	-5.8	1.95 V	360	53.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

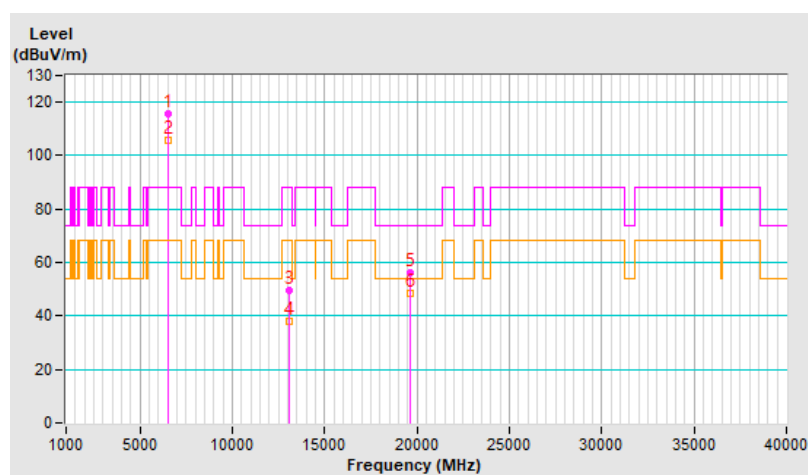


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.9 PK			2.27 H	202	105.7	8.2
2	*6855.00	103.7 AV			2.27 H	202	95.5	8.2
3	#13710.00	47.5 PK	88.2	-40.7	1.41 H	98	31.2	16.3
4	#13710.00	35.6 AV	68.2	-32.6	1.41 H	98	19.3	16.3
5	20565.00	54.6 PK	74.0	-19.4	1.87 H	360	58.3	-3.7
6	20565.00	46.4 AV	54.0	-7.6	1.87 H	360	50.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

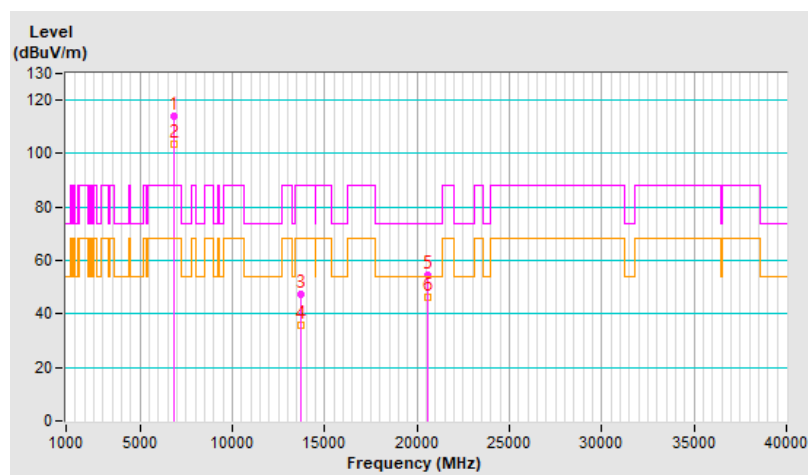


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.4 PK			1.25 V	327	105.2	8.2
2	*6855.00	102.0 AV			1.25 V	327	93.8	8.2
3	#13710.00	49.1 PK	88.2	-39.1	1.02 V	14	32.8	16.3
4	#13710.00	38.3 AV	68.2	-29.9	1.02 V	14	22.0	16.3
5	20565.00	56.4 PK	74.0	-17.6	1.91 V	360	60.1	-3.7
6	20565.00	48.2 AV	54.0	-5.8	1.91 V	360	51.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

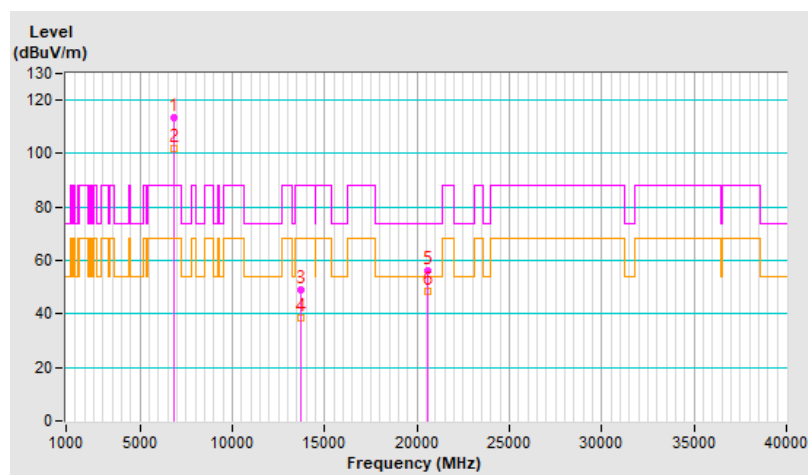


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.8 PK	88.2	-22.4	1.02 H	167	60.2	5.6
2	#5925.00	42.1 AV	68.2	-26.1	1.02 H	167	36.5	5.6
3	*5955.00	111.3 PK			1.02 H	167	105.8	5.5
4	*5955.00	101.0 AV			1.02 H	167	95.5	5.5
5	11910.00	46.4 PK	74.0	-27.6	1.44 H	78	31.8	14.6
6	11910.00	34.9 AV	54.0	-19.1	1.44 H	78	20.3	14.6
7	17865.00	54.7 PK	74.0	-19.3	1.86 H	360	28.8	25.9
8	17865.00	46.4 AV	54.0	-7.6	1.86 H	360	20.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

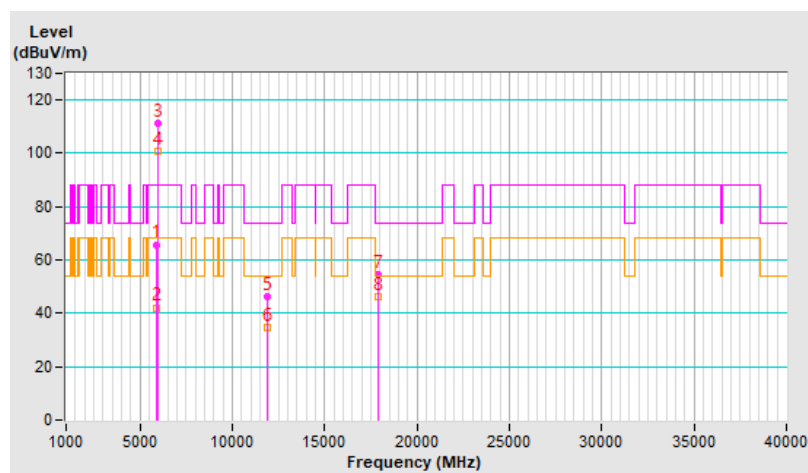


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.6 PK	88.2	-23.6	1.06 V	54	59.0	5.6
2	#5925.00	47.2 AV	68.2	-21.0	1.06 V	54	41.6	5.6
3	*5955.00	116.4 PK			1.06 V	54	110.9	5.5
4	*5955.00	106.6 AV			1.06 V	54	101.1	5.5
5	11910.00	49.5 PK	74.0	-24.5	1.04 V	27	34.9	14.6
6	11910.00	38.2 AV	54.0	-15.8	1.04 V	27	23.6	14.6
7	17865.00	56.9 PK	74.0	-17.1	1.96 V	351	31.0	25.9
8	17865.00	48.4 AV	54.0	-5.6	1.96 V	351	22.5	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

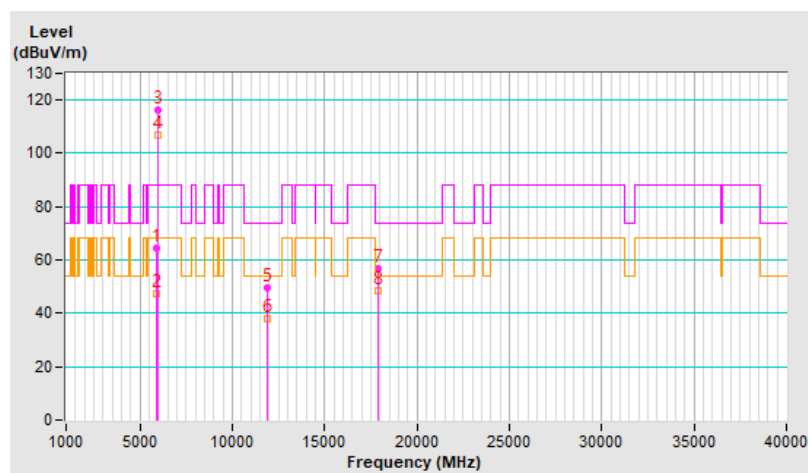


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.2 PK			1.00 H	170	104.4	6.8
2	*6415.00	100.7 AV			1.00 H	170	93.9	6.8
3	#12830.00	46.5 PK	88.2	-41.7	1.43 H	95	31.4	15.1
4	#12830.00	34.9 AV	68.2	-33.3	1.43 H	95	19.8	15.1
5	19245.00	54.3 PK	74.0	-19.7	1.94 H	360	58.9	-4.6
6	19245.00	45.9 AV	54.0	-8.1	1.94 H	360	50.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

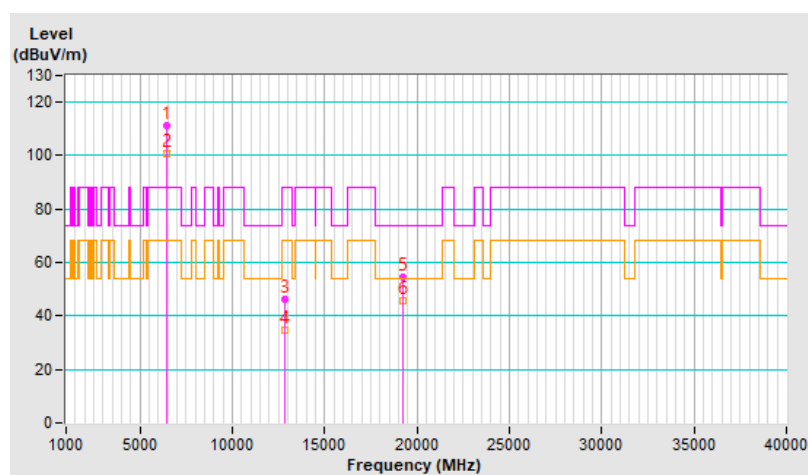


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.9 PK			1.12 V	49	110.1	6.8
2	*6415.00	107.0 AV			1.12 V	49	100.2	6.8
3	#12830.00	49.3 PK	88.2	-38.9	1.08 V	31	34.2	15.1
4	#12830.00	38.2 AV	68.2	-30.0	1.08 V	31	23.1	15.1
5	19245.00	57.3 PK	74.0	-16.7	1.97 V	354	61.9	-4.6
6	19245.00	48.7 AV	54.0	-5.3	1.97 V	354	53.3	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

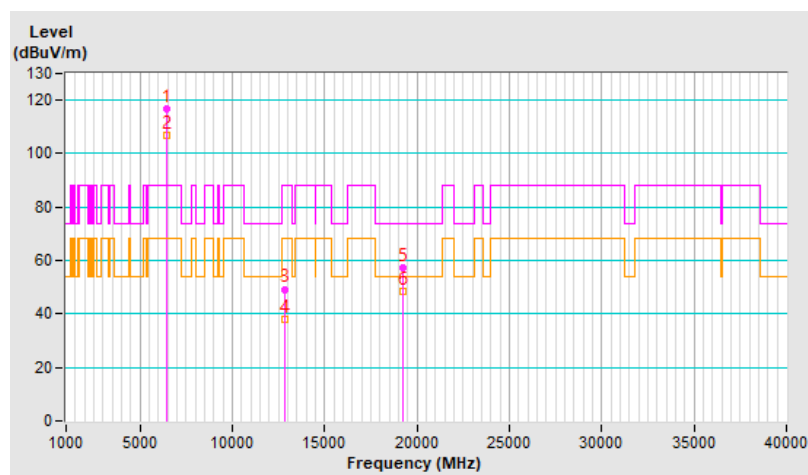


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.6 PK			1.00 H	153	104.2	7.4
2	*6535.00	101.3 AV			1.00 H	153	93.9	7.4
3	#13070.00	46.7 PK	88.2	-41.5	1.44 H	75	31.6	15.1
4	#13070.00	34.9 AV	68.2	-33.3	1.44 H	75	19.8	15.1
5	19605.00	54.3 PK	74.0	-19.7	1.91 H	360	59.1	-4.8
6	19605.00	46.1 AV	54.0	-7.9	1.91 H	360	50.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

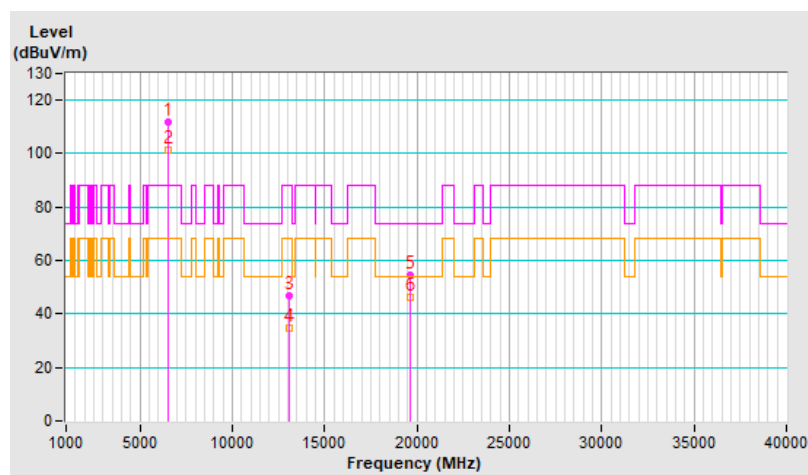


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.8 PK			1.11 V	56	109.4	7.4
2	*6535.00	107.0 AV			1.11 V	56	99.6	7.4
3	#13070.00	49.8 PK	88.2	-38.4	1.03 V	37	34.7	15.1
4	#13070.00	38.4 AV	68.2	-29.8	1.03 V	37	23.3	15.1
5	19605.00	57.0 PK	74.0	-17.0	1.92 V	356	61.8	-4.8
6	19605.00	48.3 AV	54.0	-5.7	1.92 V	356	53.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

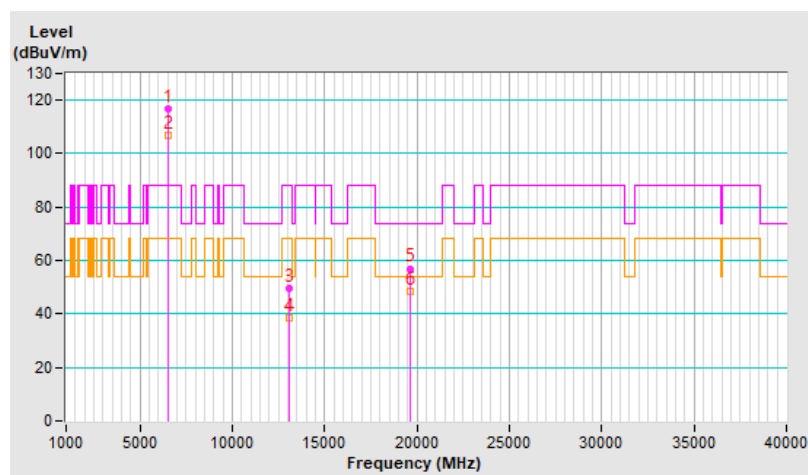


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.2 PK			2.28 H	203	106.0	8.2
2	*6855.00	103.5 AV			2.28 H	203	95.3	8.2
3	#13710.00	46.9 PK	88.2	-41.3	1.50 H	77	30.6	16.3
4	#13710.00	35.1 AV	68.2	-33.1	1.50 H	77	18.8	16.3
5	20565.00	54.4 PK	74.0	-19.6	1.89 H	360	58.1	-3.7
6	20565.00	46.4 AV	54.0	-7.6	1.89 H	360	50.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

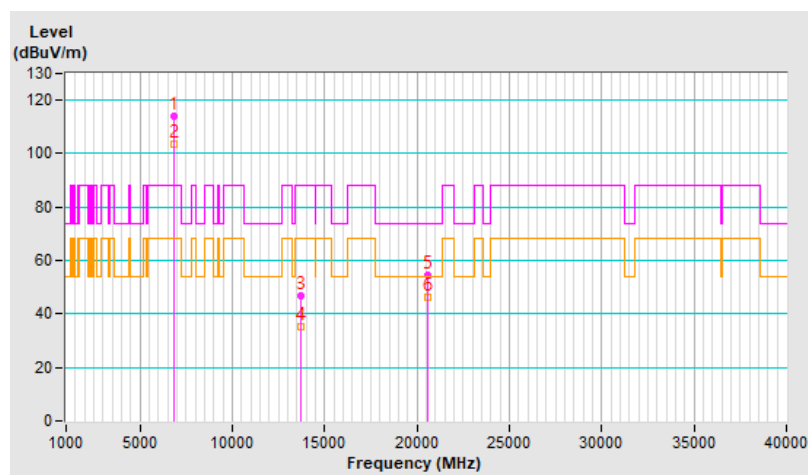


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.8 PK			1.25 V	327	103.6	8.2
2	*6855.00	101.6 AV			1.25 V	327	93.4	8.2
3	#13710.00	49.8 PK	88.2	-38.4	1.10 V	33	33.5	16.3
4	#13710.00	38.2 AV	68.2	-30.0	1.10 V	33	21.9	16.3
5	20565.00	56.9 PK	74.0	-17.1	1.98 V	360	60.6	-3.7
6	20565.00	48.7 AV	54.0	-5.3	1.98 V	360	52.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

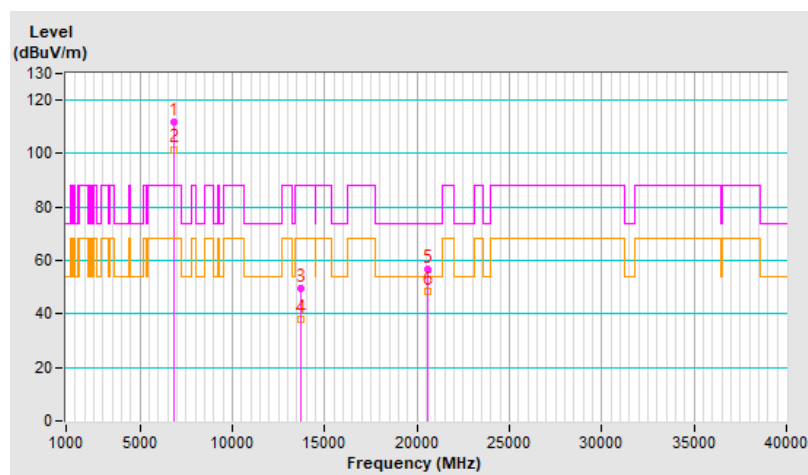


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.6 PK	88.2	-9.6	1.05 H	165	73.0	5.6
2	#5925.00	62.1 AV	68.2	-6.1	1.05 H	165	56.5	5.6
3	*5985.00	105.3 PK			1.05 H	165	99.8	5.5
4	*5985.00	94.5 AV			1.05 H	165	89.0	5.5
5	11970.00	47.2 PK	74.0	-26.8	1.50 H	94	32.7	14.5
6	11970.00	35.6 AV	54.0	-18.4	1.50 H	94	21.1	14.5
7	17955.00	54.1 PK	74.0	-19.9	1.84 H	360	25.8	28.3
8	17955.00	46.1 AV	54.0	-7.9	1.84 H	360	17.8	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

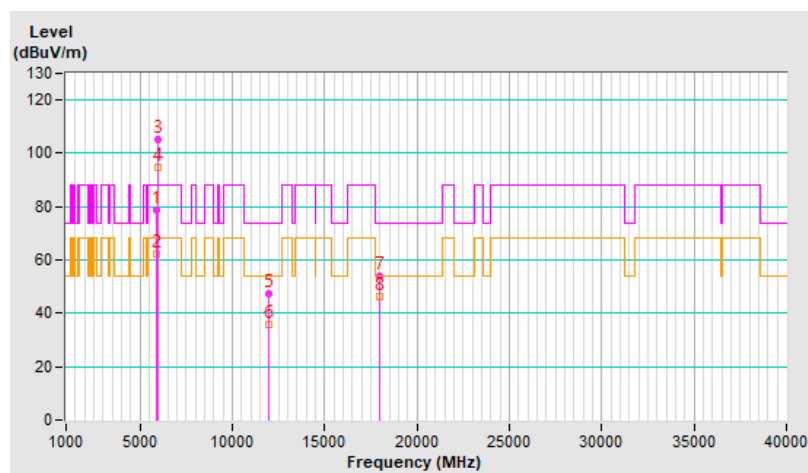


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.6 PK	88.2	-3.6	1.05 V	49	79.0	5.6
2	#5925.00	65.9 AV	68.2	-2.3	1.05 V	49	60.3	5.6
3	*5985.00	110.7 PK			1.05 V	49	105.2	5.5
4	*5985.00	98.9 AV			1.05 V	49	93.4	5.5
5	11970.00	50.0 PK	74.0	-24.0	1.08 V	42	35.5	14.5
6	11970.00	38.6 AV	54.0	-15.4	1.08 V	42	24.1	14.5
7	17955.00	56.5 PK	74.0	-17.5	2.03 V	351	28.2	28.3
8	17955.00	48.2 AV	54.0	-5.8	2.03 V	351	19.9	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

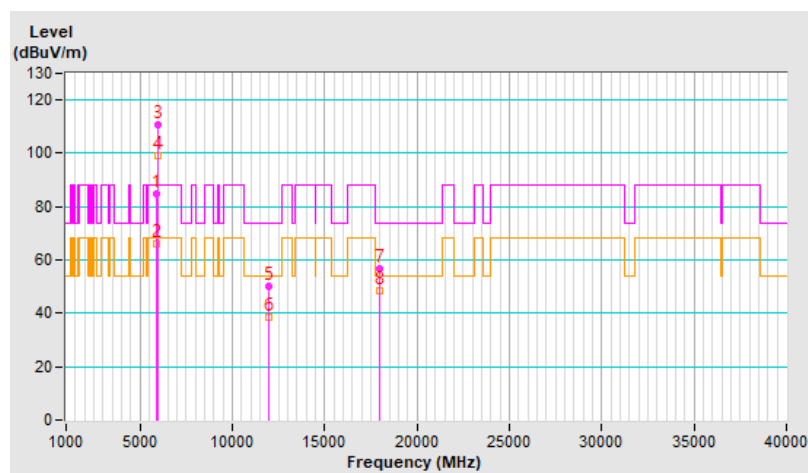


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	105.5 PK			1.02 H	180	98.9	6.6
2	*6385.00	94.6 AV			1.02 H	180	88.0	6.6
3	#12770.00	47.0 PK	88.2	-41.2	1.46 H	76	32.1	14.9
4	#12770.00	35.1 AV	68.2	-33.1	1.46 H	76	20.2	14.9
5	19155.00	54.4 PK	74.0	-19.6	1.93 H	360	59.1	-4.7
6	19155.00	46.2 AV	54.0	-7.8	1.93 H	360	50.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

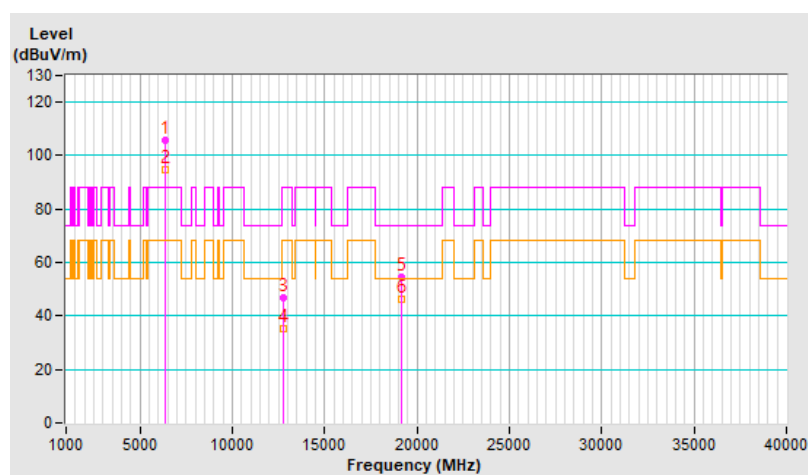


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.0 PK			1.00 V	44	104.4	6.6
2	*6385.00	99.0 AV			1.00 V	44	92.4	6.6
3	#12770.00	49.9 PK	88.2	-38.3	1.13 V	27	35.0	14.9
4	#12770.00	38.5 AV	68.2	-29.7	1.13 V	27	23.6	14.9
5	19155.00	57.3 PK	74.0	-16.7	1.92 V	349	62.0	-4.7
6	19155.00	49.0 AV	54.0	-5.0	1.92 V	349	53.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

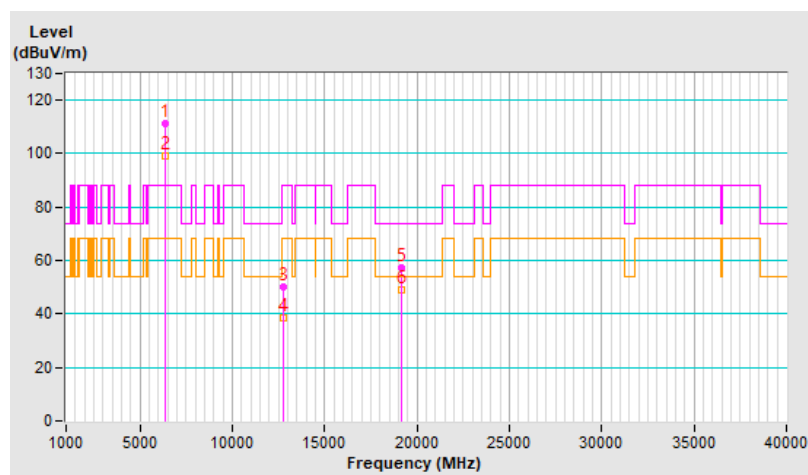


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	105.3 PK			1.00 H	151	97.5	7.8
2	*6625.00	94.6 AV			1.00 H	151	86.8	7.8
3	13250.00	47.3 PK	74.0	-26.7	1.51 H	83	31.9	15.4
4	13250.00	35.5 AV	54.0	-18.5	1.51 H	83	20.1	15.4
5	19875.00	54.3 PK	74.0	-19.7	1.92 H	360	58.8	-4.5
6	19875.00	46.0 AV	54.0	-8.0	1.92 H	360	50.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

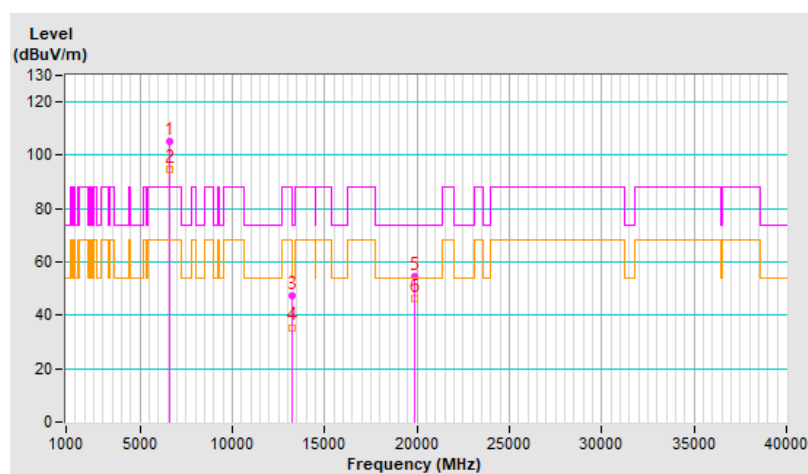


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.3 PK			1.00 V	59	103.5	7.8
2	*6625.00	99.3 AV			1.00 V	59	91.5	7.8
3	13250.00	49.1 PK	74.0	-24.9	1.13 V	25	33.7	15.4
4	13250.00	38.0 AV	54.0	-16.0	1.13 V	25	22.6	15.4
5	19875.00	56.6 PK	74.0	-17.4	1.99 V	348	61.1	-4.5
6	19875.00	48.2 AV	54.0	-5.8	1.99 V	348	52.7	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

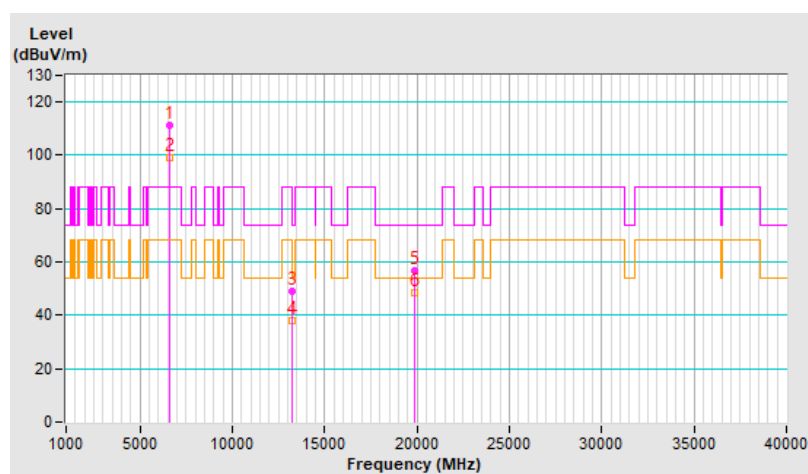


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	108.9 PK			2.26 H	204	101.2	7.7
2	*6785.00	97.3 AV			2.26 H	204	89.6	7.7
3	#13570.00	46.7 PK	88.2	-41.5	1.48 H	79	31.0	15.7
4	#13570.00	35.0 AV	68.2	-33.2	1.48 H	79	19.3	15.7
5	20355.00	54.6 PK	74.0	-19.4	1.92 H	360	58.4	-3.8
6	20355.00	46.0 AV	54.0	-8.0	1.92 H	360	49.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

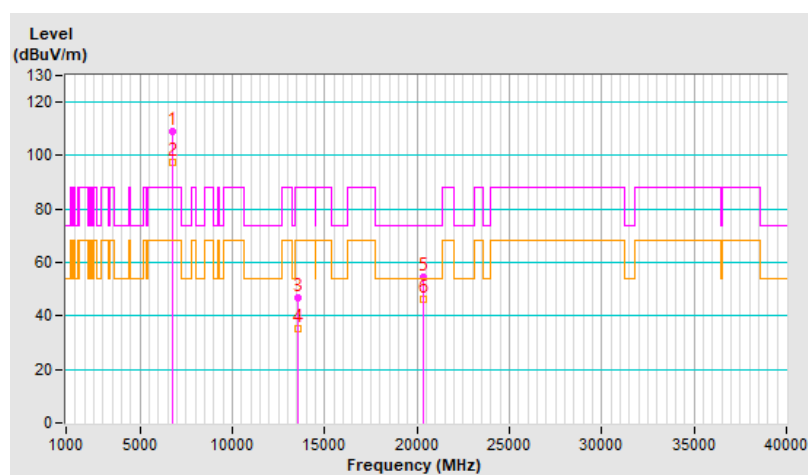


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	105.2 PK			1.34 V	142	97.5	7.7
2	*6785.00	92.2 AV			1.34 V	142	84.5	7.7
3	#13570.00	49.5 PK	88.2	-38.7	1.10 V	27	33.8	15.7
4	#13570.00	38.1 AV	68.2	-30.1	1.10 V	27	22.4	15.7
5	20355.00	57.7 PK	74.0	-16.3	1.92 V	360	61.5	-3.8
6	20355.00	49.0 AV	54.0	-5.0	1.92 V	360	52.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

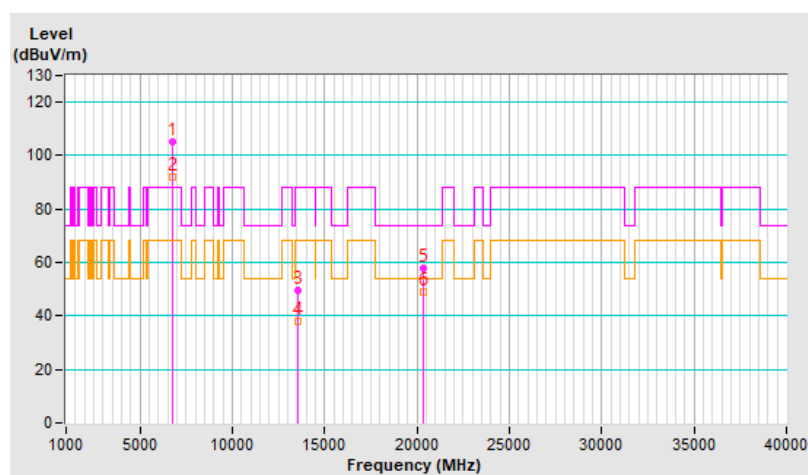


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6025.00	99.8 PK			1.21 H	166	94.2	5.6
2	*6025.00	87.7 AV			1.21 H	166	82.1	5.6
3	#6039.94	69.7 PK	88.2	-18.5	1.21 H	166	64.1	5.6
4	#6039.94	49.9 AV	68.2	-18.3	1.21 H	166	44.3	5.6
5	12050.00	46.4 PK	74.0	-27.6	1.41 H	83	31.8	14.6
6	12050.00	34.8 AV	54.0	-19.2	1.41 H	83	20.2	14.6
7	18075.00	54.5 PK	74.0	-19.5	1.91 H	360	59.8	-5.3
8	18075.00	46.4 AV	54.0	-7.6	1.91 H	360	51.7	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

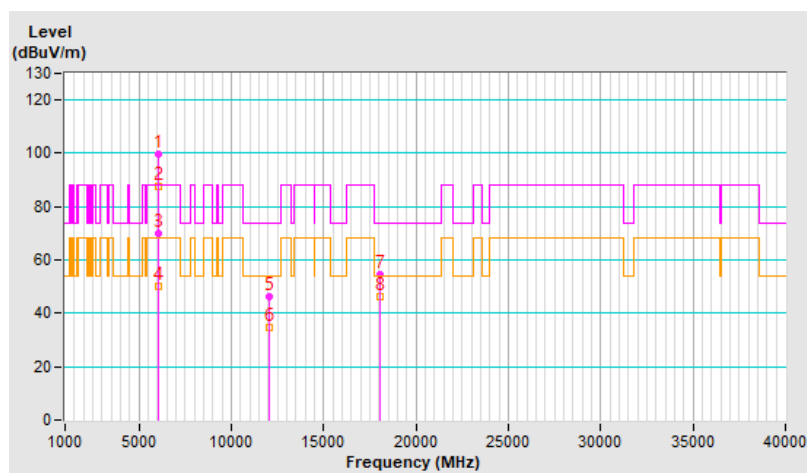


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5832.70	70.1 PK	88.2	-18.1	1.25 V	17	64.8	5.3
2	#5832.70	51.4 AV	68.2	-16.8	1.25 V	17	46.1	5.3
3	*6025.00	102.5 PK			1.25 V	17	96.9	5.6
4	*6025.00	90.6 AV			1.25 V	17	85.0	5.6
5	12050.00	49.7 PK	74.0	-24.3	1.05 V	46	35.1	14.6
6	12050.00	38.4 AV	54.0	-15.6	1.05 V	46	23.8	14.6
7	18075.00	57.2 PK	74.0	-16.8	1.98 V	349	62.5	-5.3
8	18075.00	48.9 AV	54.0	-5.1	1.98 V	349	54.2	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

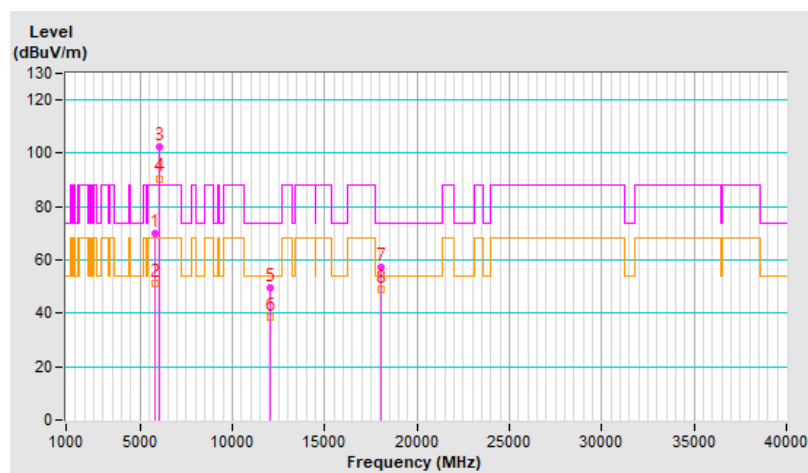


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	100.0 PK			1.16 H	168	93.6	6.4
2	*6345.00	88.1 AV			1.16 H	168	81.7	6.4
3	12690.00	47.4 PK	74.0	-26.6	1.41 H	86	32.5	14.9
4	12690.00	35.5 AV	54.0	-18.5	1.41 H	86	20.6	14.9
5	19035.00	54.4 PK	74.0	-19.6	1.85 H	360	59.3	-4.9
6	19035.00	46.0 AV	54.0	-8.0	1.85 H	360	50.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

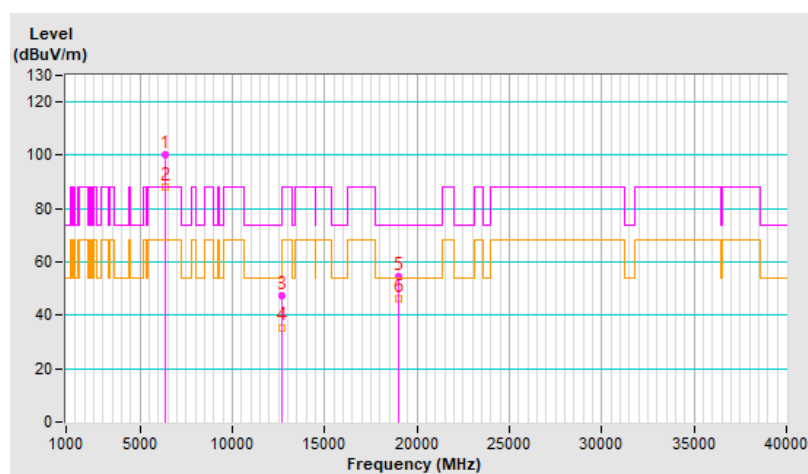


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	102.2 PK			1.24 V	5	95.8	6.4
2	*6345.00	90.5 AV			1.24 V	5	84.1	6.4
3	12690.00	49.3 PK	74.0	-24.7	1.12 V	20	34.4	14.9
4	12690.00	38.0 AV	54.0	-16.0	1.12 V	20	23.1	14.9
5	19035.00	56.7 PK	74.0	-17.3	1.92 V	357	61.6	-4.9
6	19035.00	48.5 AV	54.0	-5.5	1.92 V	357	53.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

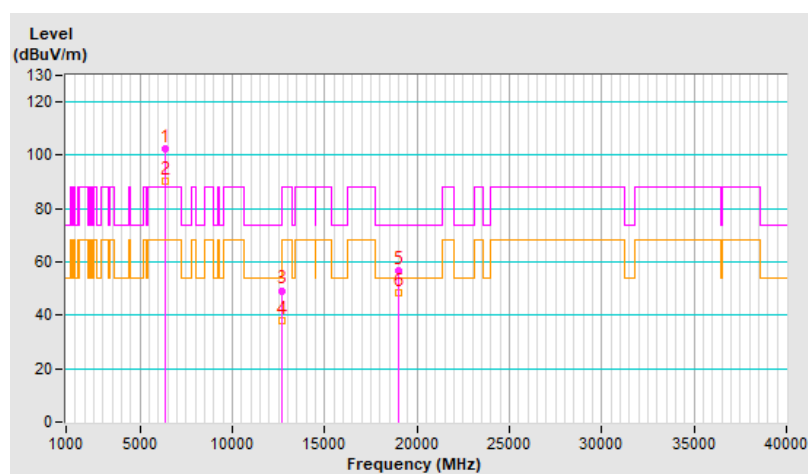


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.3 PK			2.30 H	201	95.5	7.8
2	*6665.00	91.5 AV			2.30 H	201	83.7	7.8
3	13330.00	47.0 PK	74.0	-27.0	1.51 H	78	31.7	15.3
4	13330.00	35.1 AV	54.0	-18.9	1.51 H	78	19.8	15.3
5	19995.00	54.1 PK	74.0	-19.9	1.94 H	360	58.5	-4.4
6	19995.00	45.9 AV	54.0	-8.1	1.94 H	360	50.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

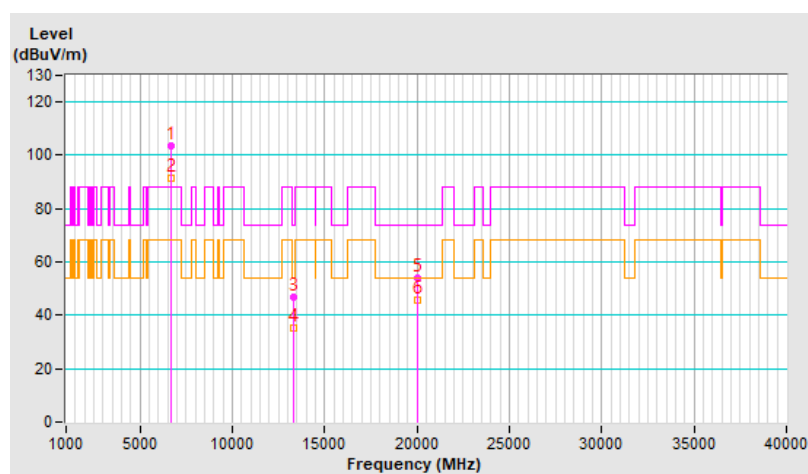


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	99.0 PK			1.26 V	148	91.2	7.8
2	*6665.00	87.6 AV			1.26 V	148	79.8	7.8
3	13330.00	50.1 PK	74.0	-23.9	1.10 V	21	34.8	15.3
4	13330.00	38.8 AV	54.0	-15.2	1.10 V	21	23.5	15.3
5	19995.00	57.0 PK	74.0	-17.0	1.99 V	357	61.4	-4.4
6	19995.00	48.2 AV	54.0	-5.8	1.99 V	357	52.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

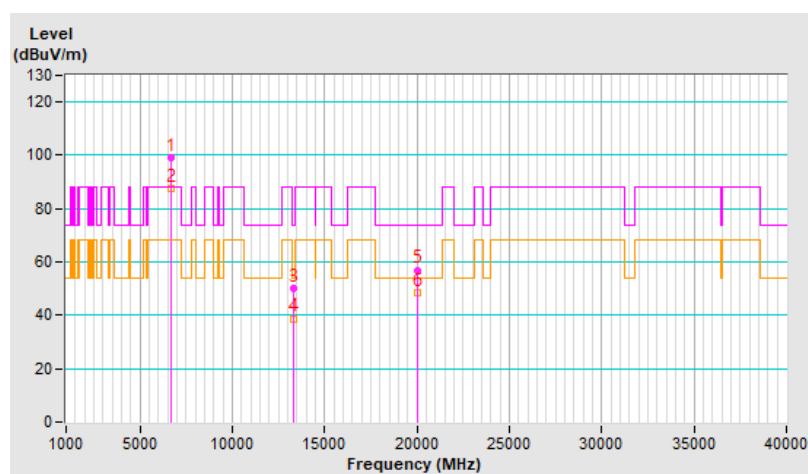


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.6 PK	88.2	-15.6	1.10 H	168	67.0	5.6
2	#5925.00	51.3 AV	68.2	-16.9	1.10 H	168	45.7	5.6
3	*6025.00	98.1 PK			1.10 H	168	92.5	5.6
4	*6025.00	87.0 AV			1.10 H	168	81.4	5.6
5	12050.00	46.2 PK	74.0	-27.8	1.47 H	92	31.6	14.6
6	12050.00	34.7 AV	54.0	-19.3	1.47 H	92	20.1	14.6
7	18075.00	54.6 PK	74.0	-19.4	1.89 H	360	59.9	-5.3
8	18075.00	46.3 AV	54.0	-7.7	1.89 H	360	51.6	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

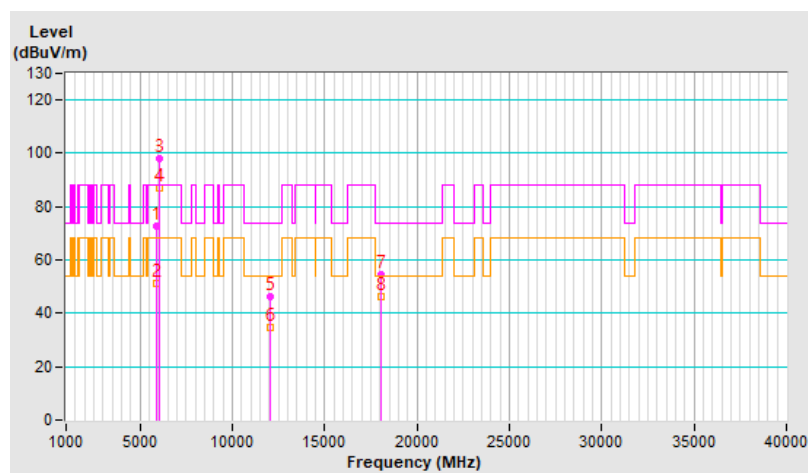


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.5 PK	88.2	-10.7	1.50 V	4	71.9	5.6
2	#5925.00	53.7 AV	68.2	-14.5	1.50 V	4	48.1	5.6
3	*6025.00	101.4 PK			1.50 V	4	95.8	5.6
4	*6025.00	90.0 AV			1.50 V	4	84.4	5.6
5	12050.00	49.2 PK	74.0	-24.8	1.06 V	19	34.6	14.6
6	12050.00	38.1 AV	54.0	-15.9	1.06 V	19	23.5	14.6
7	18075.00	56.7 PK	74.0	-17.3	1.94 V	349	62.0	-5.3
8	18075.00	48.3 AV	54.0	-5.7	1.94 V	349	53.6	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

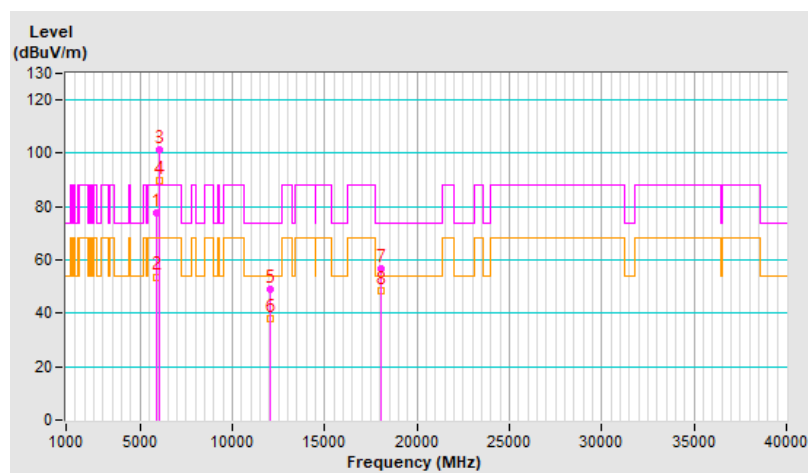


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	99.8 PK			1.17 H	154	93.4	6.4
2	*6345.00	87.7 AV			1.17 H	154	81.3	6.4
3	12690.00	46.9 PK	74.0	-27.1	1.49 H	75	32.0	14.9
4	12690.00	34.9 AV	54.0	-19.1	1.49 H	75	20.0	14.9
5	19035.00	54.4 PK	74.0	-19.6	1.93 H	360	59.3	-4.9
6	19035.00	46.3 AV	54.0	-7.7	1.93 H	360	51.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

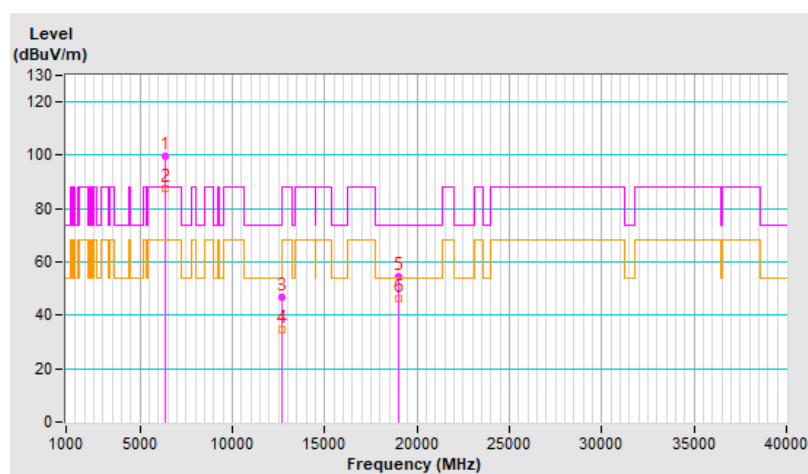


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	101.6 PK			1.44 V	6	95.2	6.4
2	*6345.00	90.4 AV			1.44 V	6	84.0	6.4
3	12690.00	49.7 PK	74.0	-24.3	1.12 V	27	34.8	14.9
4	12690.00	38.6 AV	54.0	-15.4	1.12 V	27	23.7	14.9
5	19035.00	57.6 PK	74.0	-16.4	2.01 V	352	62.5	-4.9
6	19035.00	48.8 AV	54.0	-5.2	2.01 V	352	53.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

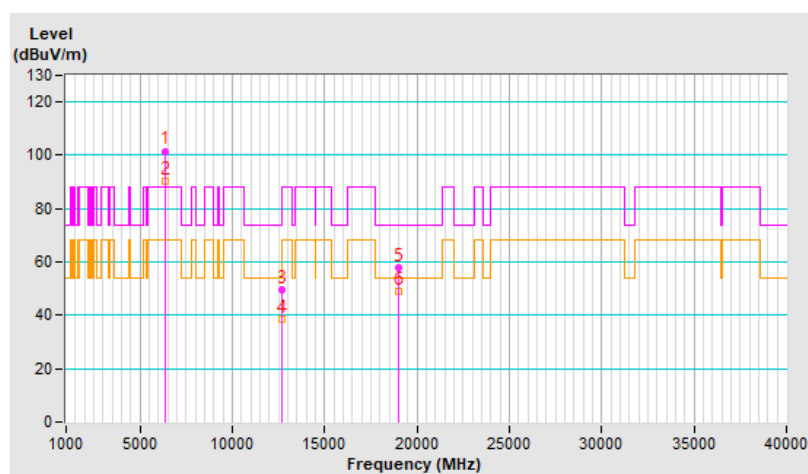


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.9 PK			2.32 H	200	95.1	7.8
2	*6665.00	91.3 AV			2.32 H	200	83.5	7.8
3	13330.00	46.8 PK	74.0	-27.2	1.46 H	90	31.5	15.3
4	13330.00	35.1 AV	54.0	-18.9	1.46 H	90	19.8	15.3
5	19995.00	54.7 PK	74.0	-19.3	1.92 H	360	59.1	-4.4
6	19995.00	46.2 AV	54.0	-7.8	1.92 H	360	50.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

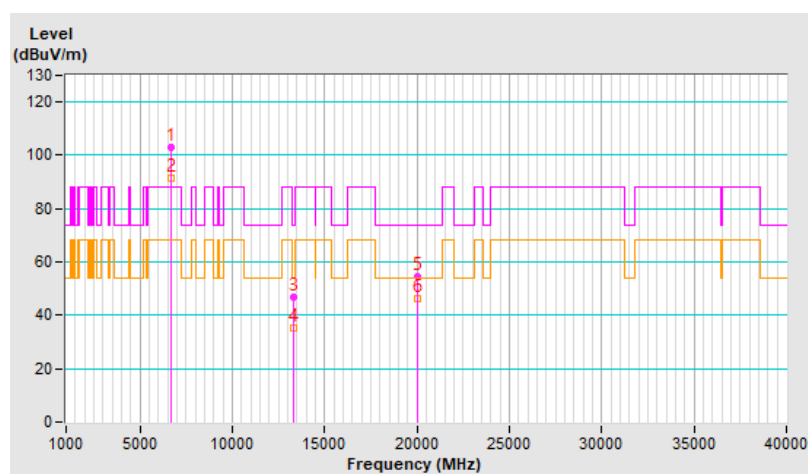


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	98.2 PK			1.26 V	148	90.4	7.8
2	*6665.00	87.2 AV			1.26 V	148	79.4	7.8
3	13330.00	49.7 PK	74.0	-24.3	1.05 V	29	34.4	15.3
4	13330.00	38.7 AV	54.0	-15.3	1.05 V	29	23.4	15.3
5	19995.00	57.0 PK	74.0	-17.0	1.98 V	350	61.4	-4.4
6	19995.00	48.7 AV	54.0	-5.3	1.98 V	350	53.1	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

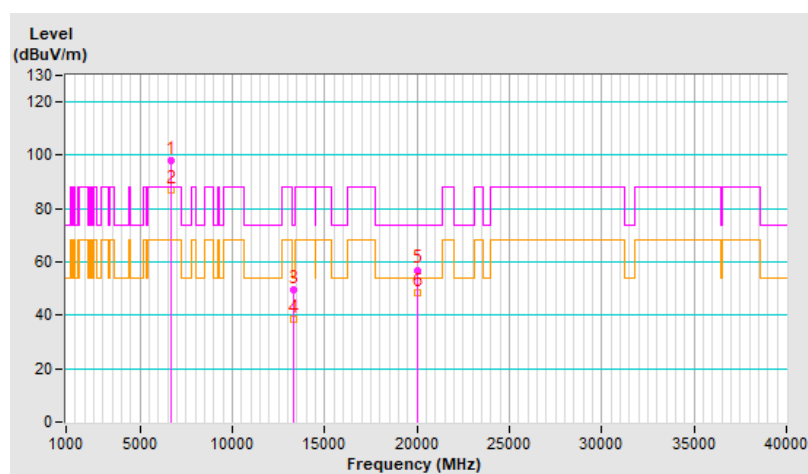


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

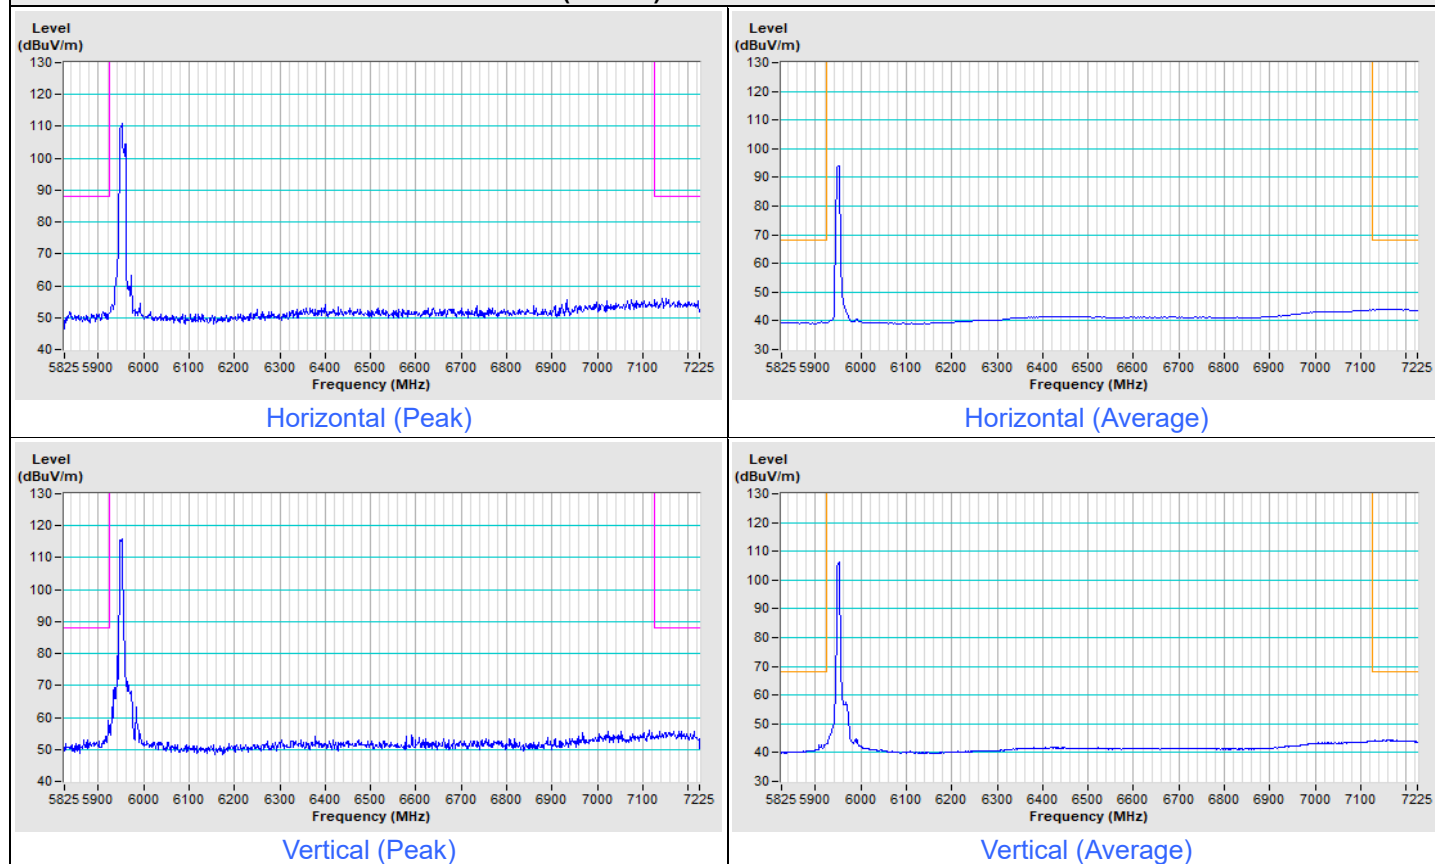


802.11be (EHT20) 52+26-tone MRU Channel 181

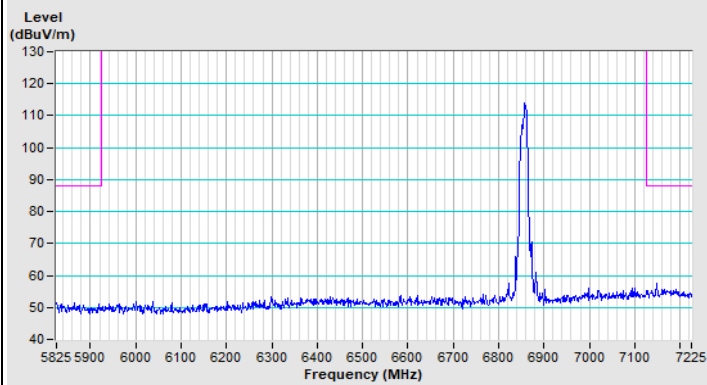


Horizontal (Peak)

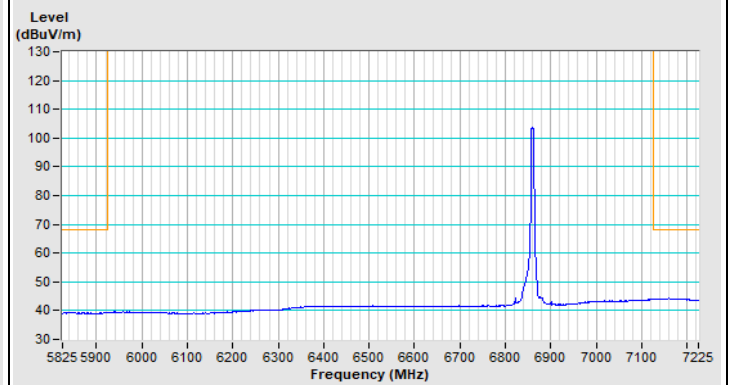

Horizontal (Average)

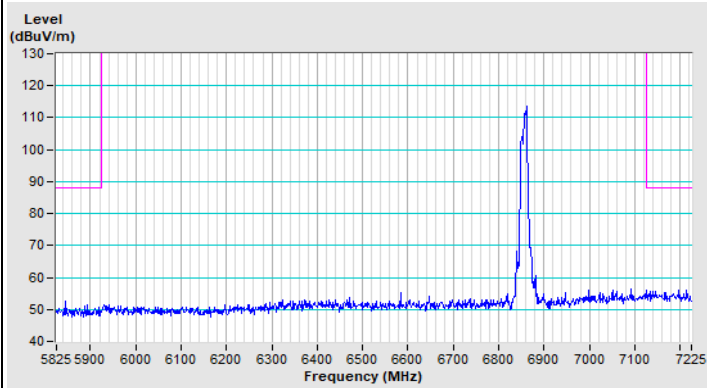


Vertical (Peak)

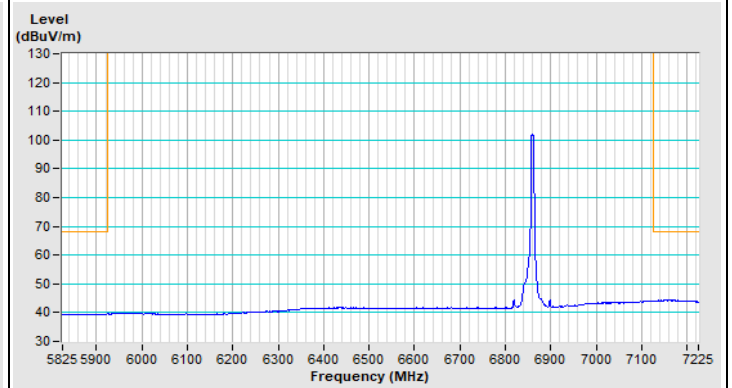


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

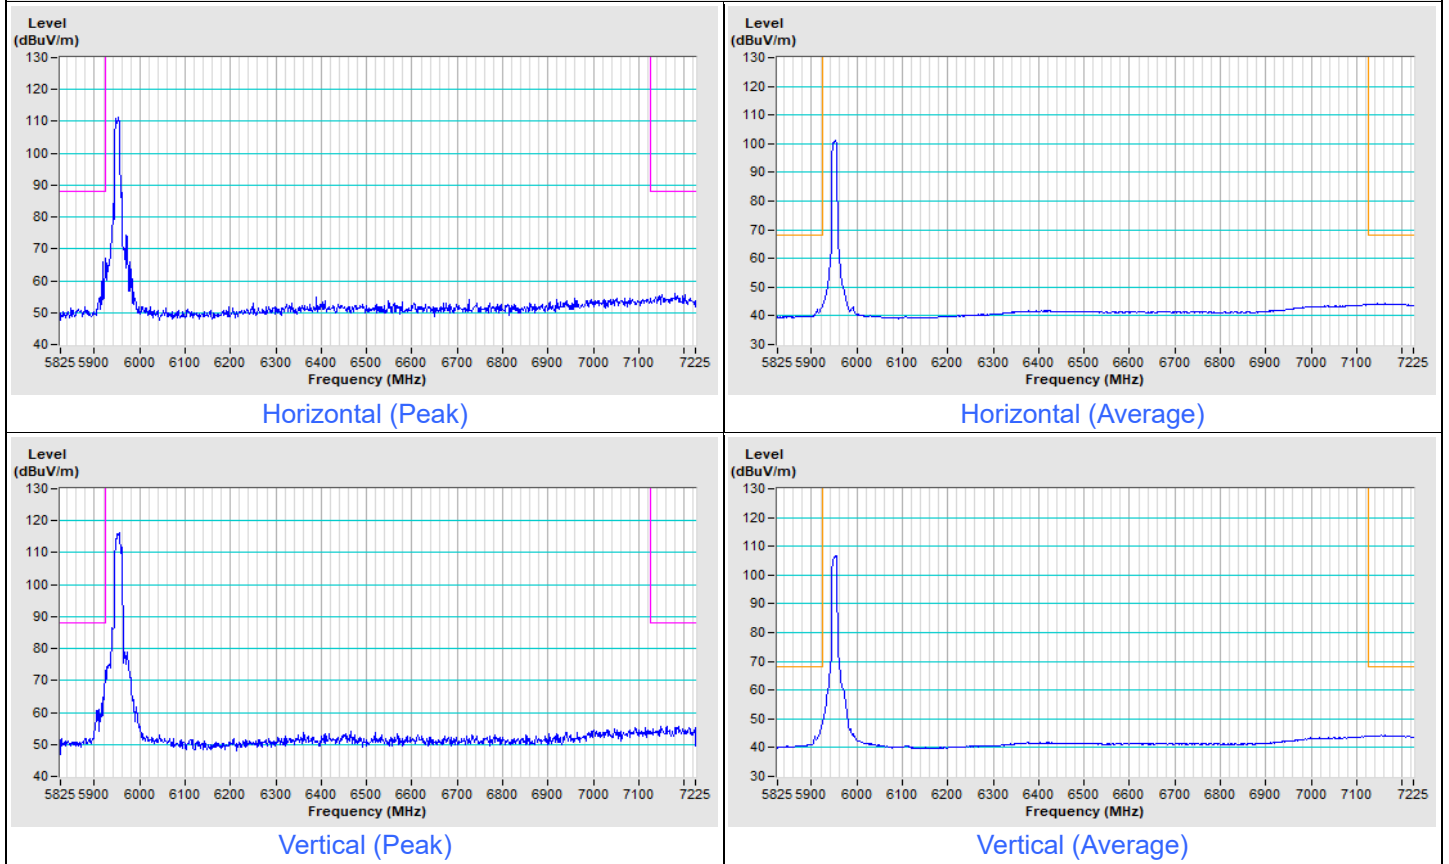


802.11be (EHT20) 106+26-tone MRU Channel 181

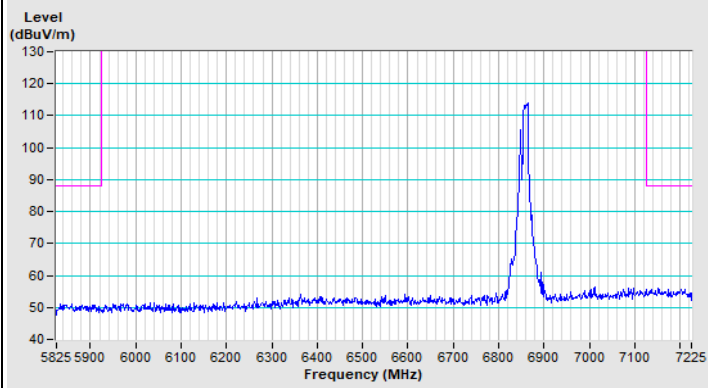


Horizontal (Peak)

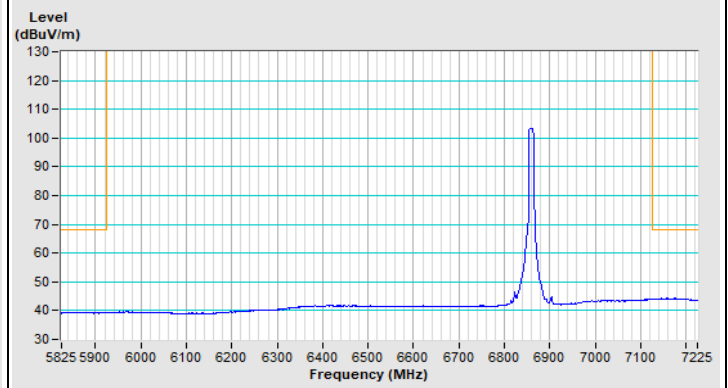

Horizontal (Average)

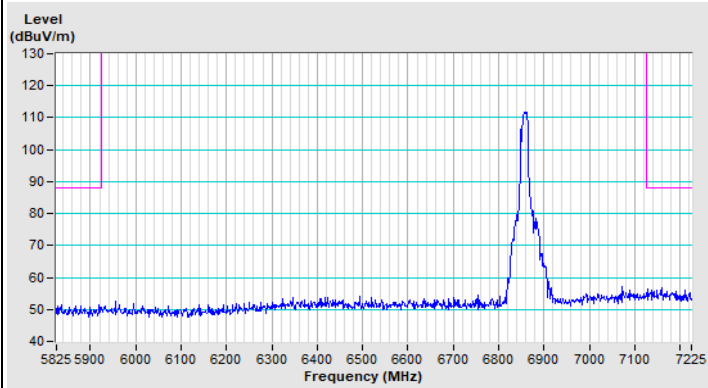


Vertical (Peak)

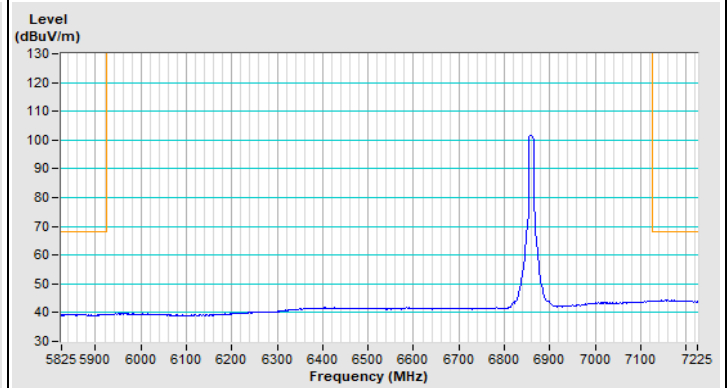


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

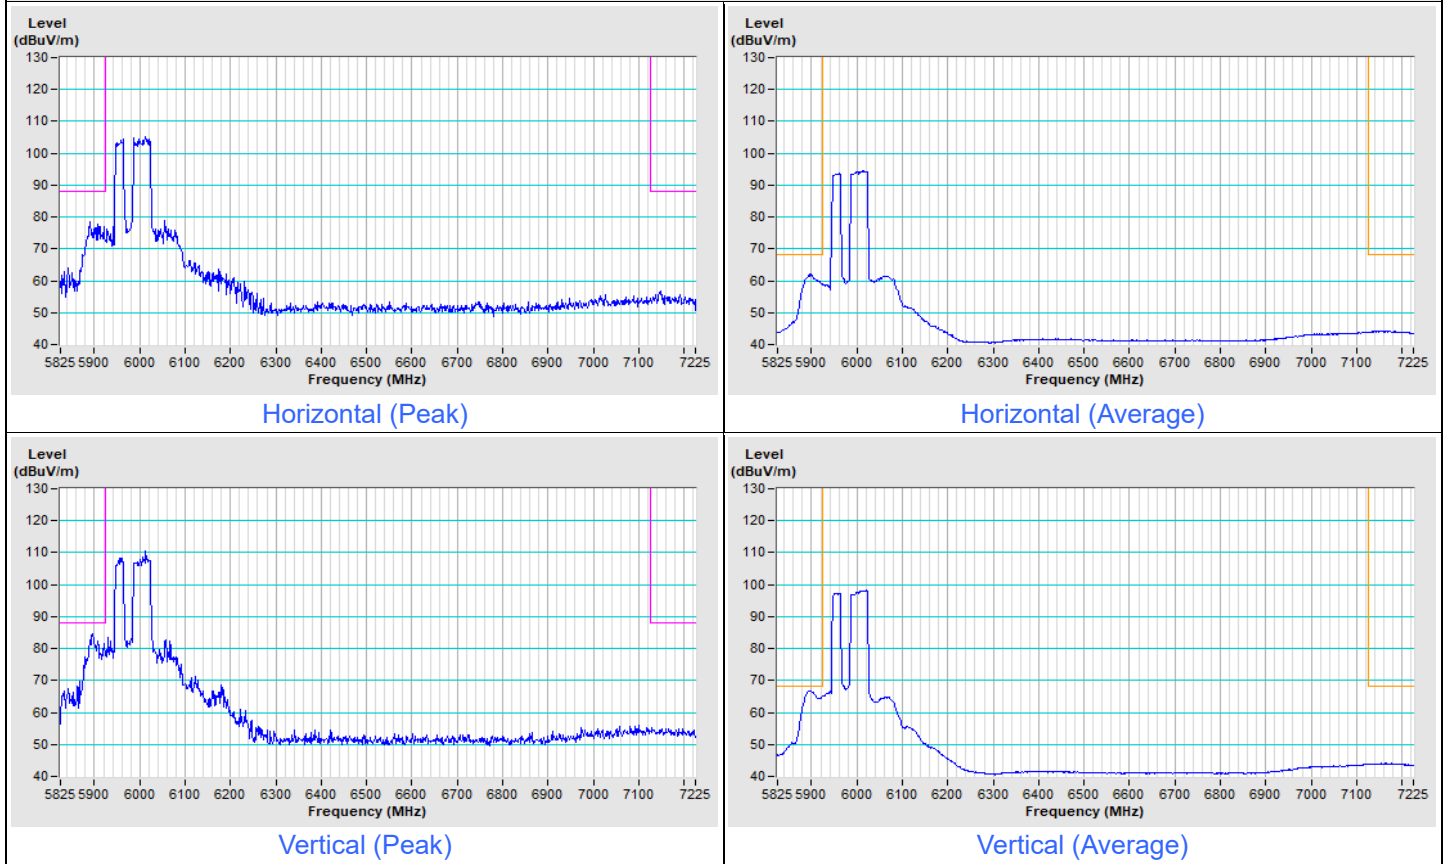


802.11be (EHT80) 484+242-tone MRU Channel 167

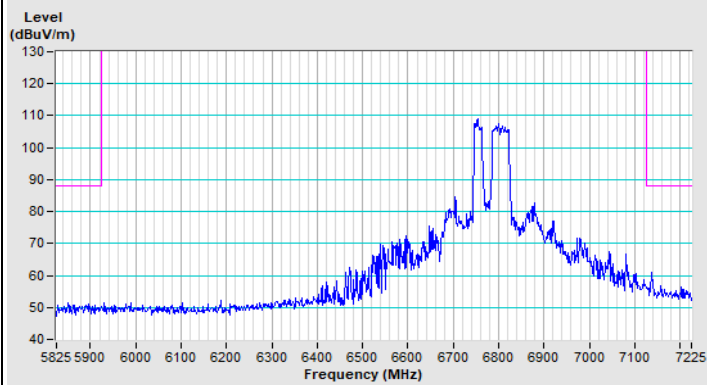


Horizontal (Peak)

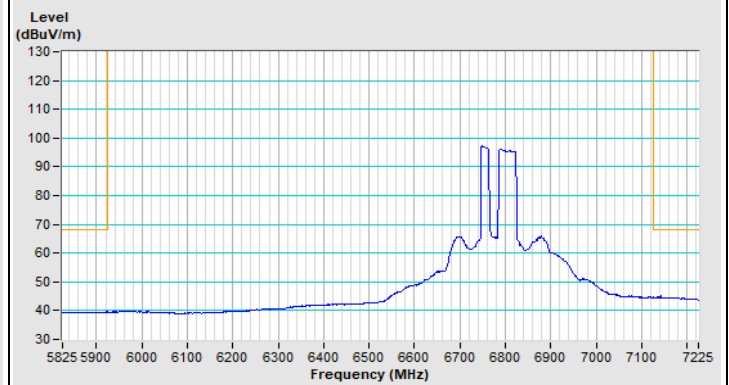

Horizontal (Average)

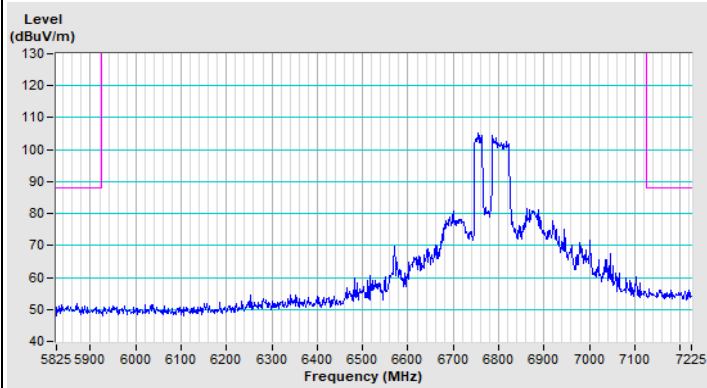


Vertical (Peak)

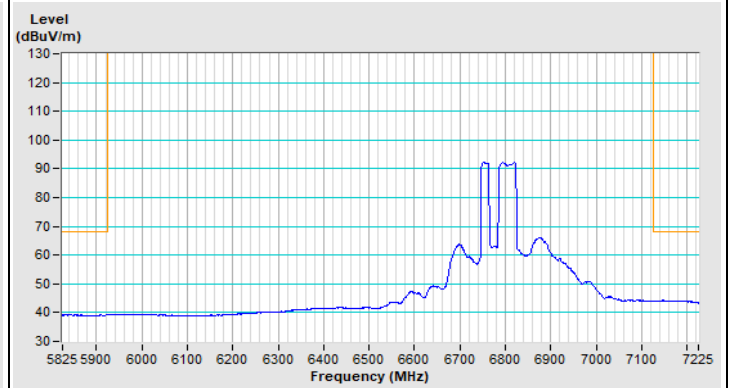


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

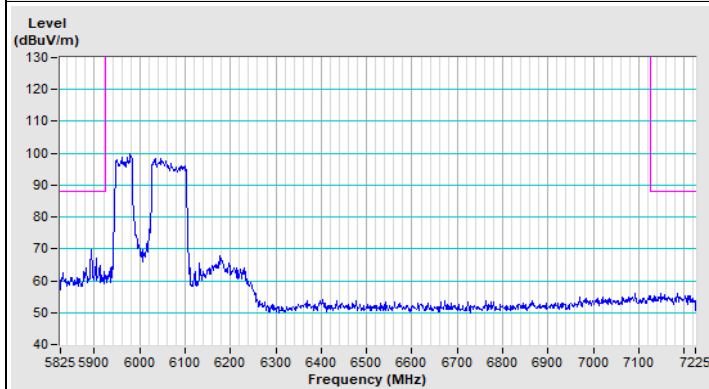


Horizontal (Peak)

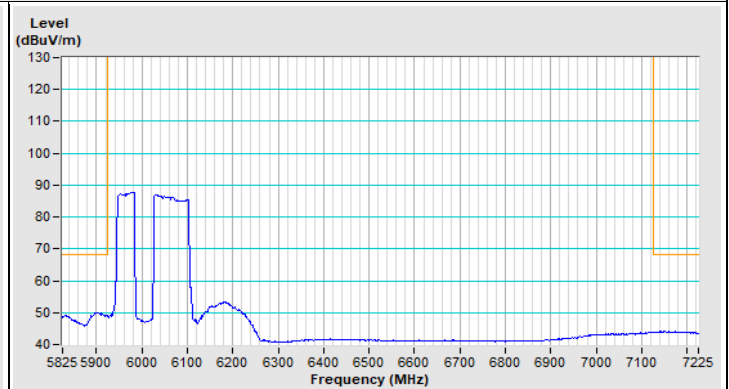

Horizontal (Average)

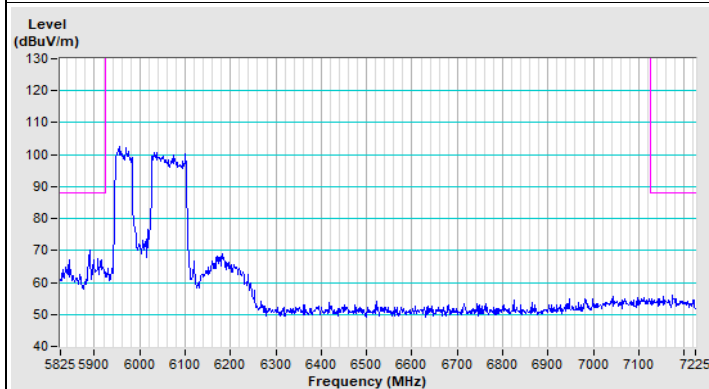


Vertical (Peak)

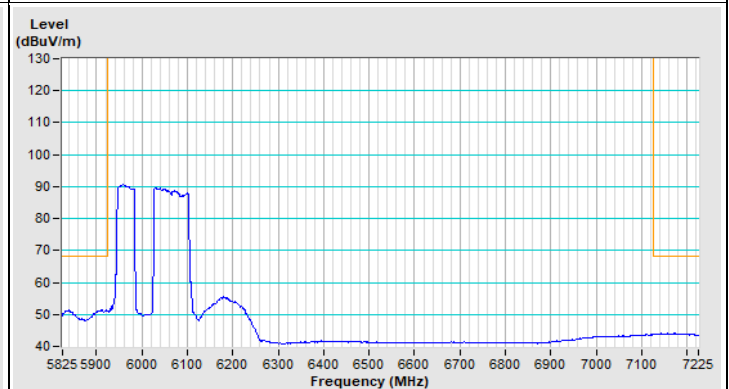


Vertical (Average)


802.11be (EHT160) 996+484-tone MRU Channel 143

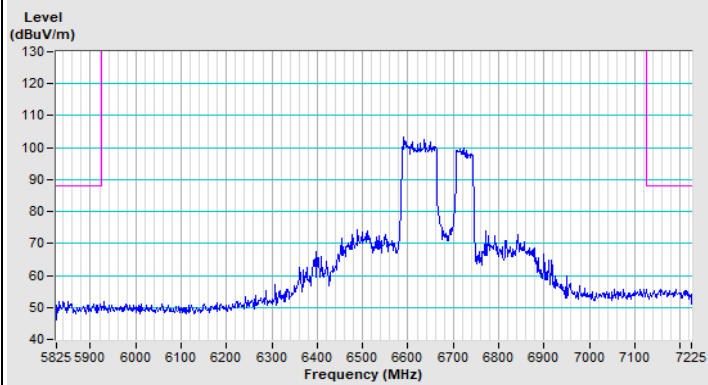


Horizontal (Peak)

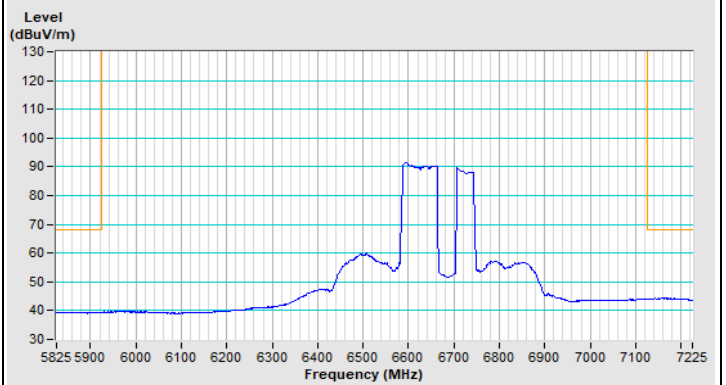

Horizontal (Average)

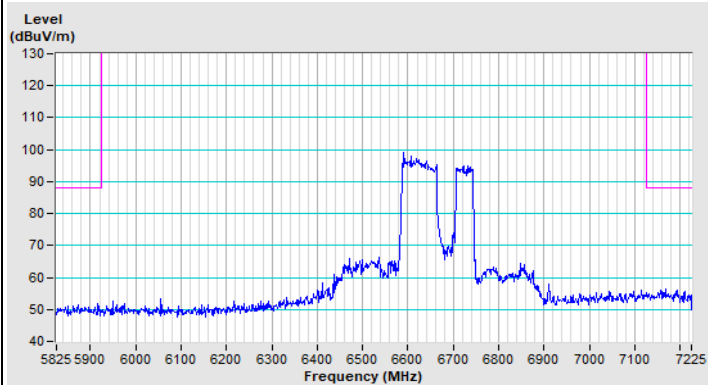


Vertical (Peak)

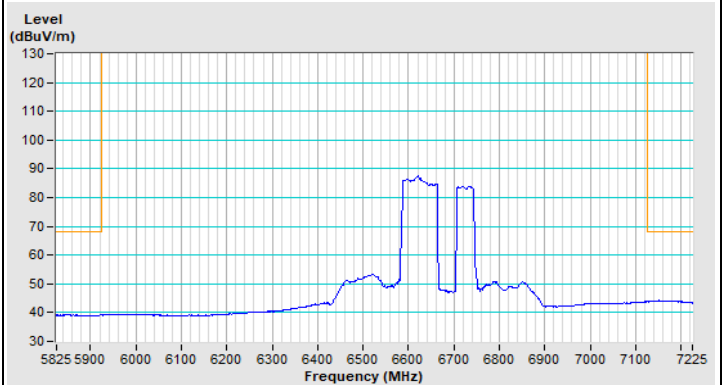


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

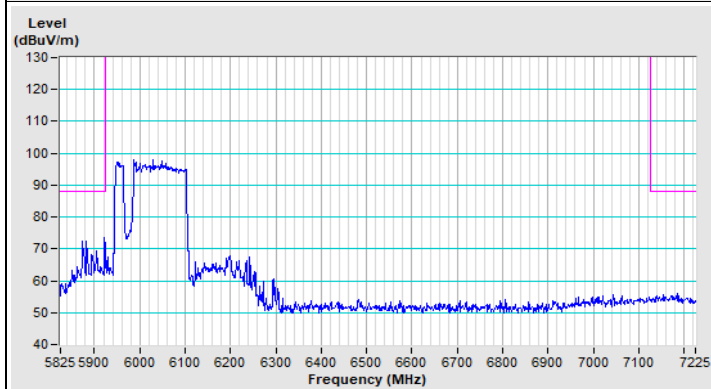


Horizontal (Peak)

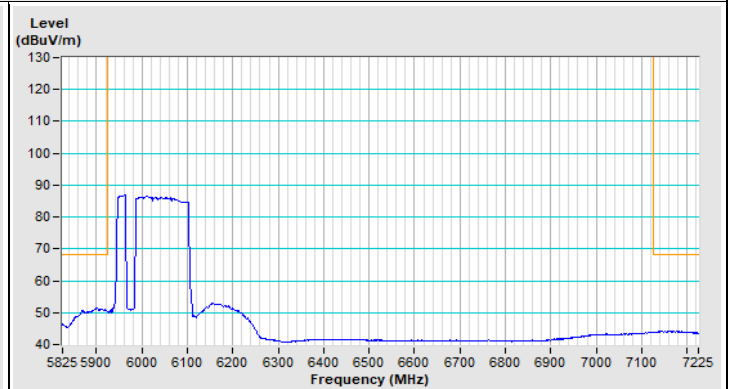


Horizontal (Average)

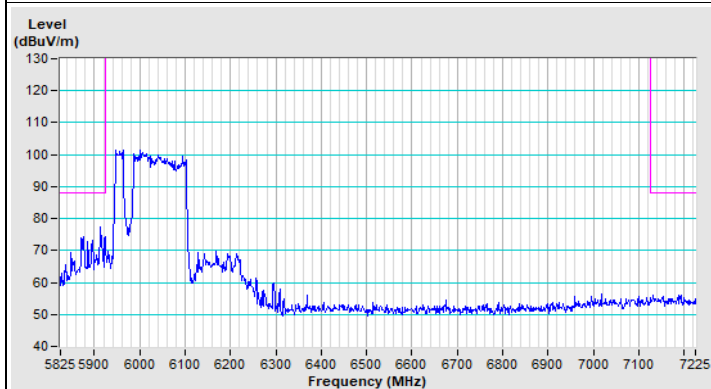


Vertical (Peak)

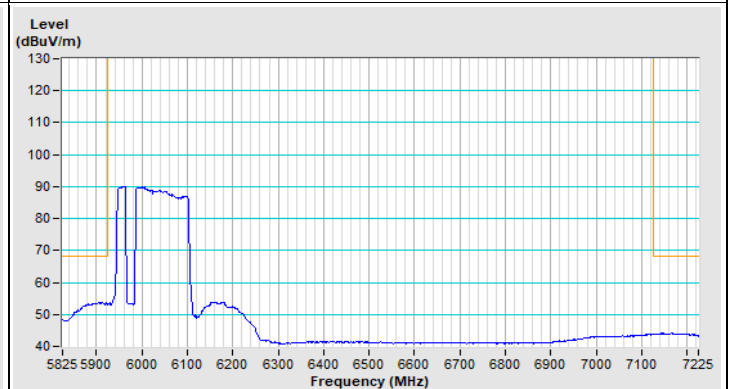


Vertical (Average)

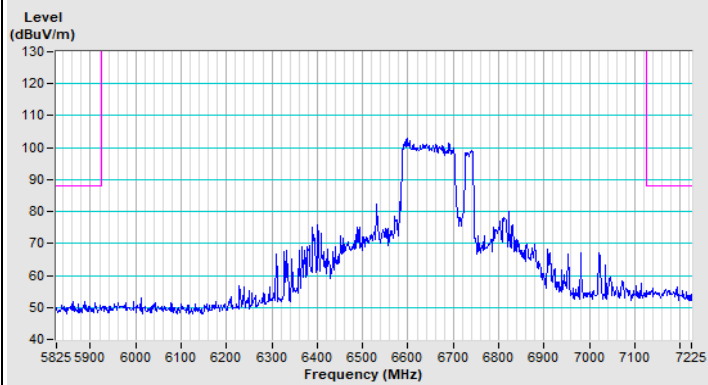802.11be (EHT160) 996+484+242-tone MRU Channel 143


Horizontal (Peak)

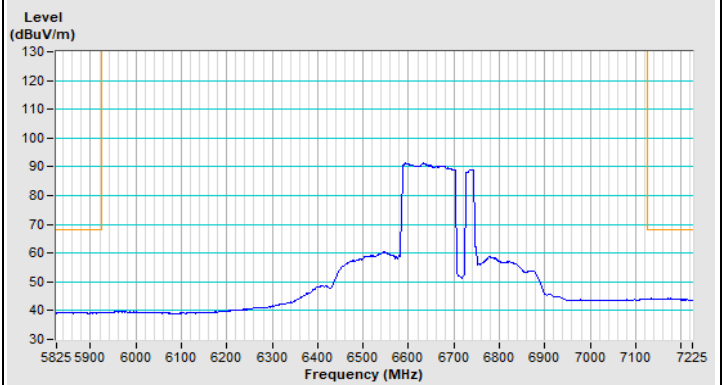

Horizontal (Average)

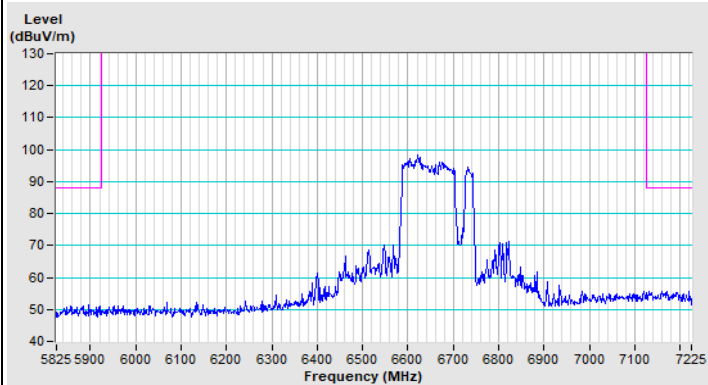

Vertical (Peak)

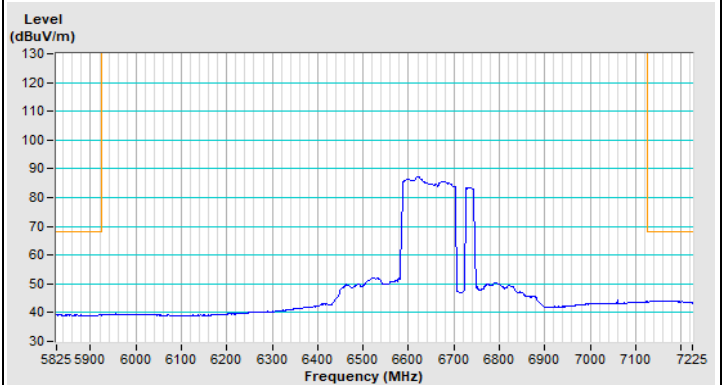

Vertical (Average)


Mode B_2TX

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.5 PK	88.2	-33.7	1.18 H	164	48.9	5.6
2	#5925.00	42.8 AV	68.2	-25.4	1.18 H	164	37.2	5.6
3	*5955.00	113.5 PK			1.18 H	164	108.0	5.5
4	*5955.00	103.2 AV			1.18 H	164	97.7	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.67 H	2	32.1	14.6
6	11910.00	34.5 AV	54.0	-19.5	1.67 H	2	19.9	14.6
7	17865.00	56.6 PK	74.0	-17.4	1.76 H	29	30.7	25.9
8	17865.00	44.2 AV	54.0	-9.8	1.76 H	29	18.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

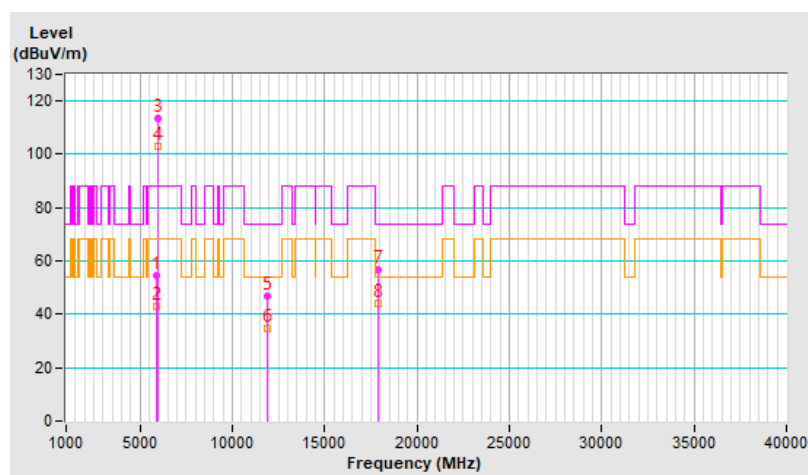


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.8 PK	88.2	-32.4	1.29 V	53	50.2	5.6
2	#5925.00	44.8 AV	68.2	-23.4	1.29 V	53	39.2	5.6
3	*5955.00	116.5 PK			1.29 V	53	111.0	5.5
4	*5955.00	106.9 AV			1.29 V	53	101.4	5.5
5	11910.00	46.2 PK	74.0	-27.8	1.66 V	19	31.6	14.6
6	11910.00	34.4 AV	54.0	-19.6	1.66 V	19	19.8	14.6
7	17865.00	56.2 PK	74.0	-17.8	1.70 V	58	30.3	25.9
8	17865.00	44.2 AV	54.0	-9.8	1.70 V	58	18.3	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

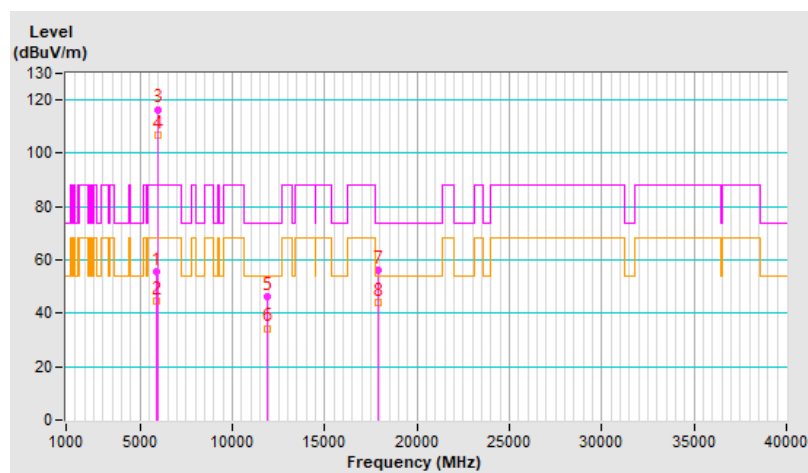


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.6 PK			1.23 H	158	106.8	6.8
2	*6415.00	103.2 AV			1.23 H	158	96.4	6.8
3	#12830.00	46.6 PK	88.2	-41.6	1.70 H	10	31.5	15.1
4	#12830.00	34.2 AV	68.2	-34.0	1.70 H	10	19.1	15.1
5	19245.00	57.2 PK	74.0	-16.8	1.75 H	41	61.8	-4.6
6	19245.00	44.6 AV	54.0	-9.4	1.75 H	41	49.2	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

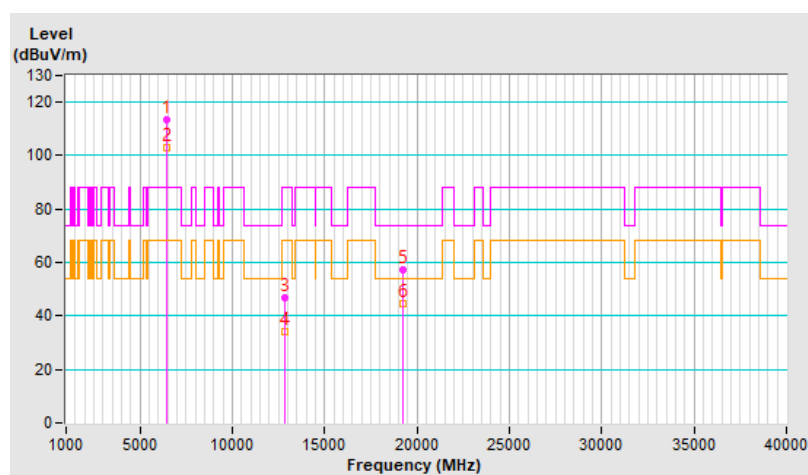


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.6 PK			1.27 V	40	109.8	6.8
2	*6415.00	107.0 AV			1.27 V	40	100.2	6.8
3	#12830.00	45.8 PK	88.2	-42.4	1.65 V	23	30.7	15.1
4	#12830.00	34.2 AV	68.2	-34.0	1.65 V	23	19.1	15.1
5	19245.00	56.6 PK	74.0	-17.4	1.72 V	47	61.2	-4.6
6	19245.00	44.5 AV	54.0	-9.5	1.72 V	47	49.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

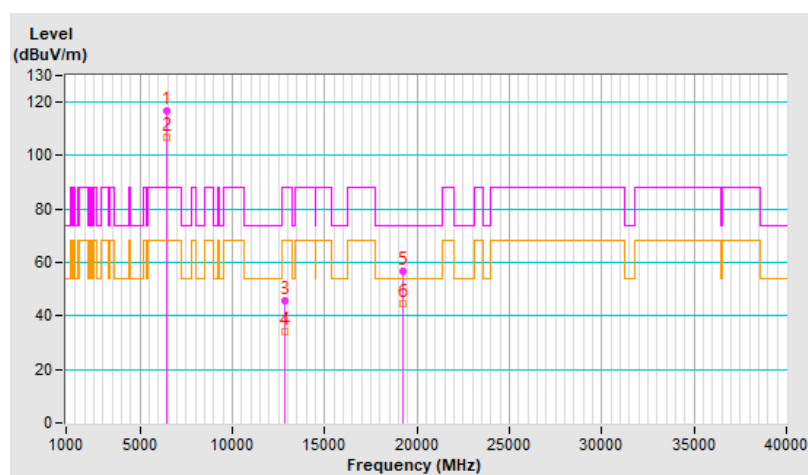


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.3 PK			1.16 H	153	105.9	7.4
2	*6535.00	103.1 AV			1.16 H	153	95.7	7.4
3	#13070.00	46.6 PK	88.2	-41.6	1.65 H	8	31.5	15.1
4	#13070.00	34.6 AV	68.2	-33.6	1.65 H	8	19.5	15.1
5	19605.00	56.8 PK	74.0	-17.2	1.76 H	28	61.6	-4.8
6	19605.00	44.2 AV	54.0	-9.8	1.76 H	28	49.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

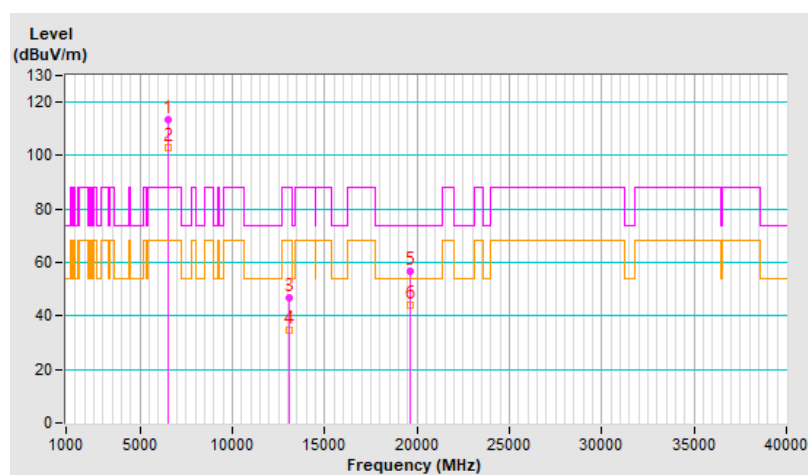


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.0 PK			1.26 V	44	108.6	7.4
2	*6535.00	106.6 AV			1.26 V	44	99.2	7.4
3	#13070.00	46.1 PK	88.2	-42.1	1.69 V	21	31.0	15.1
4	#13070.00	34.2 AV	68.2	-34.0	1.69 V	21	19.1	15.1
5	19605.00	55.5 PK	74.0	-18.5	1.73 V	57	60.3	-4.8
6	19605.00	43.7 AV	54.0	-10.3	1.73 V	57	48.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

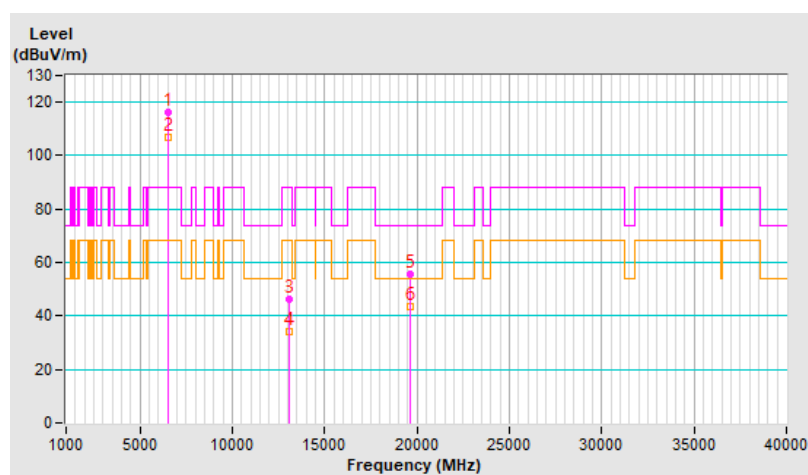


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.8 PK			2.12 H	207	107.6	8.2
2	*6855.00	103.2 AV			2.12 H	207	95.0	8.2
3	#13710.00	46.5 PK	88.2	-41.7	1.66 H	3	30.2	16.3
4	#13710.00	34.5 AV	68.2	-33.7	1.66 H	3	18.2	16.3
5	20565.00	56.8 PK	74.0	-17.2	1.68 H	43	60.5	-3.7
6	20565.00	44.3 AV	54.0	-9.7	1.68 H	43	48.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

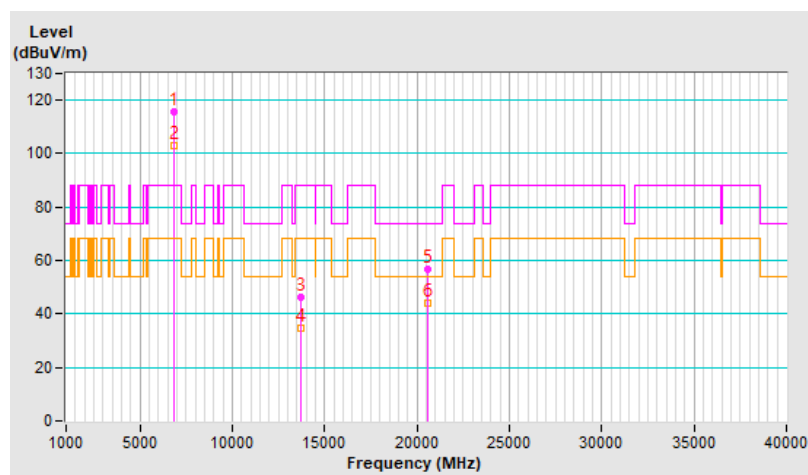


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.5 PK			1.62 V	335	104.3	8.2
2	*6855.00	102.4 AV			1.62 V	335	94.2	8.2
3	#13710.00	45.4 PK	88.2	-42.8	1.63 V	11	29.1	16.3
4	#13710.00	33.7 AV	68.2	-34.5	1.63 V	11	17.4	16.3
5	20565.00	56.3 PK	74.0	-17.7	1.80 V	53	60.0	-3.7
6	20565.00	44.5 AV	54.0	-9.5	1.80 V	53	48.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

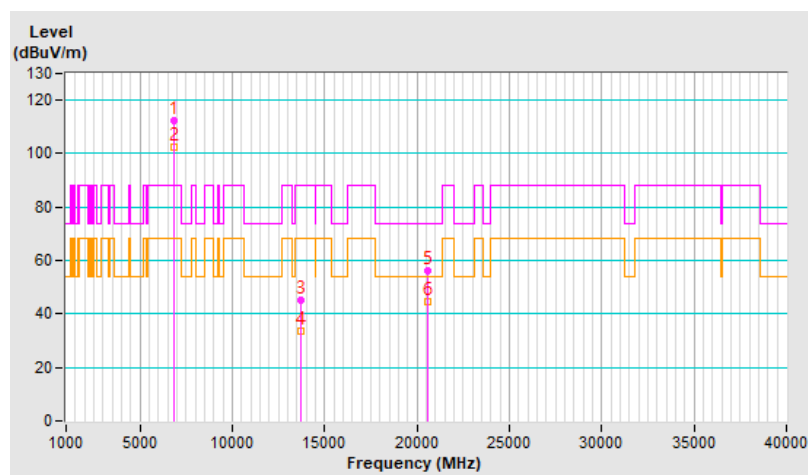


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.8 PK	88.2	-29.4	1.40 H	166	53.2	5.6
2	#5925.00	44.6 AV	68.2	-23.6	1.40 H	166	39.0	5.6
3	*5955.00	113.7 PK			1.40 H	166	108.2	5.5
4	*5955.00	103.4 AV			1.40 H	166	97.9	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.67 H	10	32.1	14.6
6	11910.00	34.3 AV	54.0	-19.7	1.67 H	10	19.7	14.6
7	17865.00	56.7 PK	74.0	-17.3	1.73 H	18	30.8	25.9
8	17865.00	44.6 AV	54.0	-9.4	1.73 H	18	18.7	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

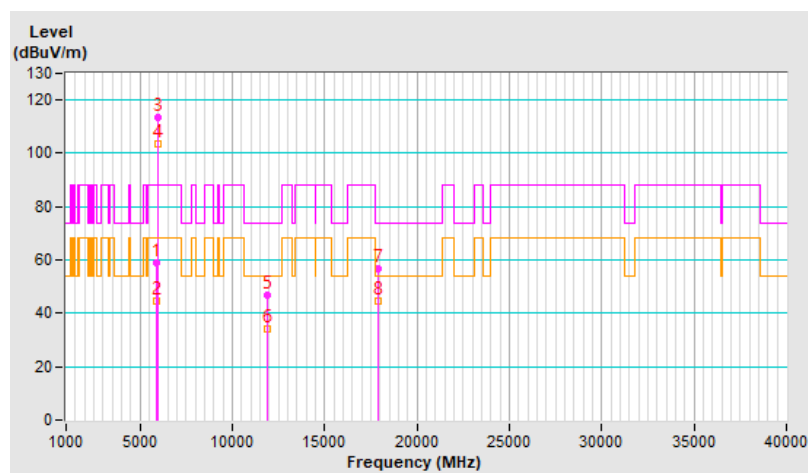


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.7 PK	88.2	-27.5	1.48 V	315	55.1	5.6
2	#5925.00	46.7 AV	68.2	-21.5	1.48 V	315	41.1	5.6
3	*5955.00	116.6 PK			1.48 V	315	111.1	5.5
4	*5955.00	105.8 AV			1.48 V	315	100.3	5.5
5	11910.00	45.7 PK	74.0	-28.3	1.68 V	23	31.1	14.6
6	11910.00	33.8 AV	54.0	-20.2	1.68 V	23	19.2	14.6
7	17865.00	55.7 PK	74.0	-18.3	1.79 V	50	29.8	25.9
8	17865.00	43.7 AV	54.0	-10.3	1.79 V	50	17.8	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

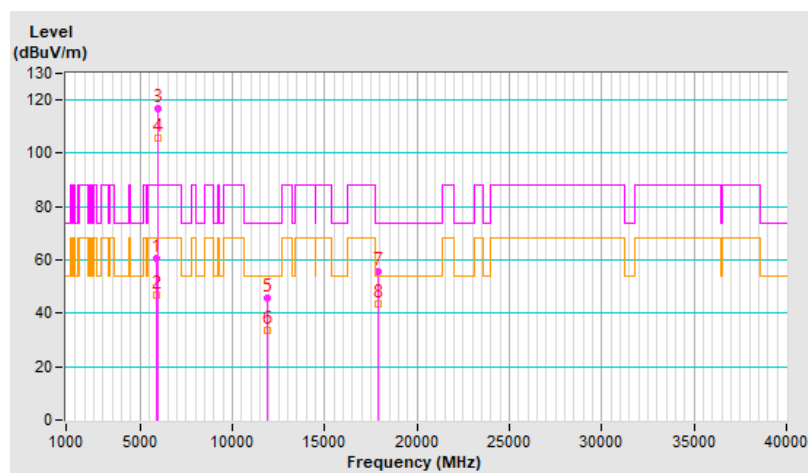


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.4 PK			1.40 H	151	106.6	6.8
2	*6415.00	103.3 AV			1.40 H	151	96.5	6.8
3	#12830.00	46.8 PK	88.2	-41.4	1.68 H	12	31.7	15.1
4	#12830.00	34.8 AV	68.2	-33.4	1.68 H	12	19.7	15.1
5	19245.00	56.3 PK	74.0	-17.7	1.74 H	29	60.9	-4.6
6	19245.00	44.3 AV	54.0	-9.7	1.74 H	29	48.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

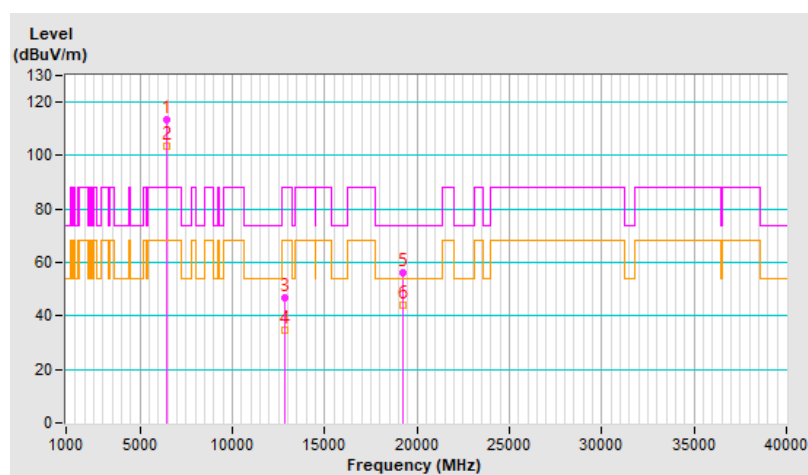


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.8 PK			1.52 V	317	110.0	6.8
2	*6415.00	106.2 AV			1.52 V	317	99.4	6.8
3	#12830.00	45.7 PK	88.2	-42.5	1.60 V	15	30.6	15.1
4	#12830.00	34.2 AV	68.2	-34.0	1.60 V	15	19.1	15.1
5	19245.00	55.6 PK	74.0	-18.4	1.74 V	41	60.2	-4.6
6	19245.00	43.9 AV	54.0	-10.1	1.74 V	41	48.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

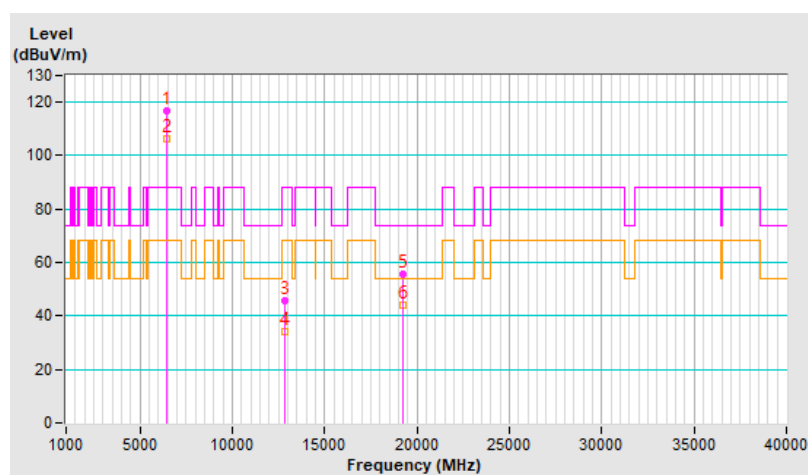


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.6 PK			1.39 H	182	106.2	7.4
2	*6535.00	103.4 AV			1.39 H	182	96.0	7.4
3	#13070.00	46.2 PK	88.2	-42.0	1.64 H	3	31.1	15.1
4	#13070.00	34.1 AV	68.2	-34.1	1.64 H	3	19.0	15.1
5	19605.00	56.9 PK	74.0	-17.1	1.71 H	41	61.7	-4.8
6	19605.00	44.7 AV	54.0	-9.3	1.71 H	41	49.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

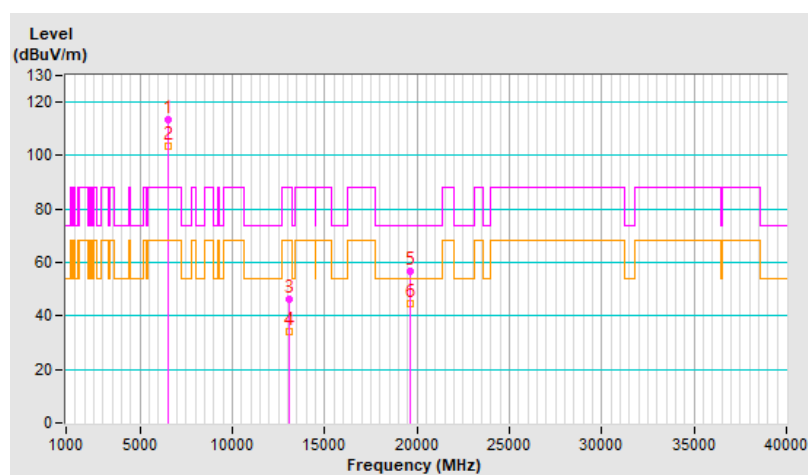


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.0 PK			1.52 V	327	109.6	7.4
2	*6535.00	106.1 AV			1.52 V	327	98.7	7.4
3	#13070.00	46.0 PK	88.2	-42.2	1.68 V	12	30.9	15.1
4	#13070.00	34.1 AV	68.2	-34.1	1.68 V	12	19.0	15.1
5	19605.00	56.3 PK	74.0	-17.7	1.80 V	54	61.1	-4.8
6	19605.00	44.2 AV	54.0	-9.8	1.80 V	54	49.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

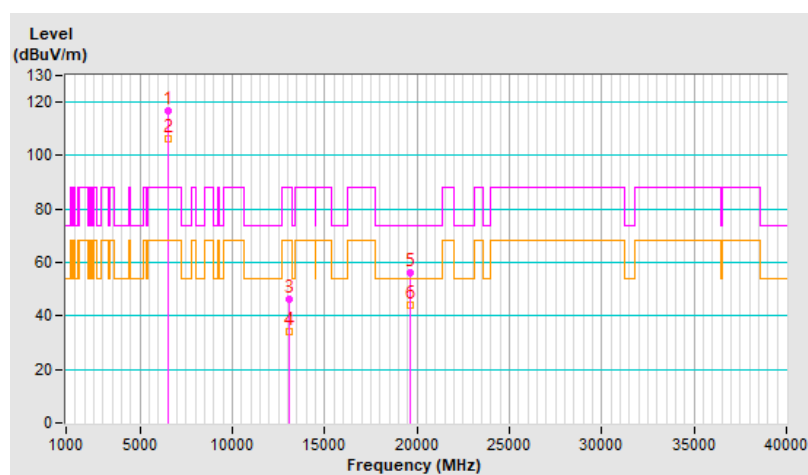


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.3 PK			2.15 H	204	107.1	8.2
2	*6855.00	104.6 AV			2.15 H	204	96.4	8.2
3	#13710.00	47.2 PK	88.2	-41.0	1.67 H	7	30.9	16.3
4	#13710.00	34.9 AV	68.2	-33.3	1.67 H	7	18.6	16.3
5	20565.00	56.8 PK	74.0	-17.2	1.72 H	38	60.5	-3.7
6	20565.00	44.7 AV	54.0	-9.3	1.72 H	38	48.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

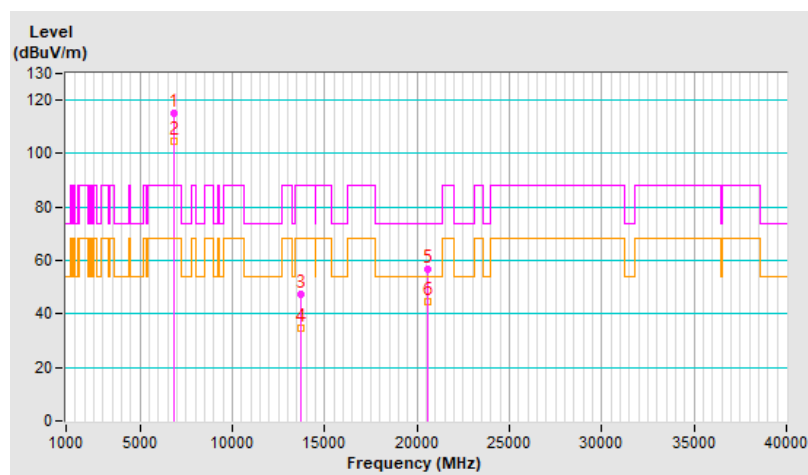


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.7 PK			1.78 V	332	105.5	8.2
2	*6855.00	103.6 AV			1.78 V	332	95.4	8.2
3	#13710.00	45.3 PK	88.2	-42.9	1.60 V	10	29.0	16.3
4	#13710.00	33.8 AV	68.2	-34.4	1.60 V	10	17.5	16.3
5	20565.00	56.8 PK	74.0	-17.2	1.74 V	36	60.5	-3.7
6	20565.00	44.5 AV	54.0	-9.5	1.74 V	36	48.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

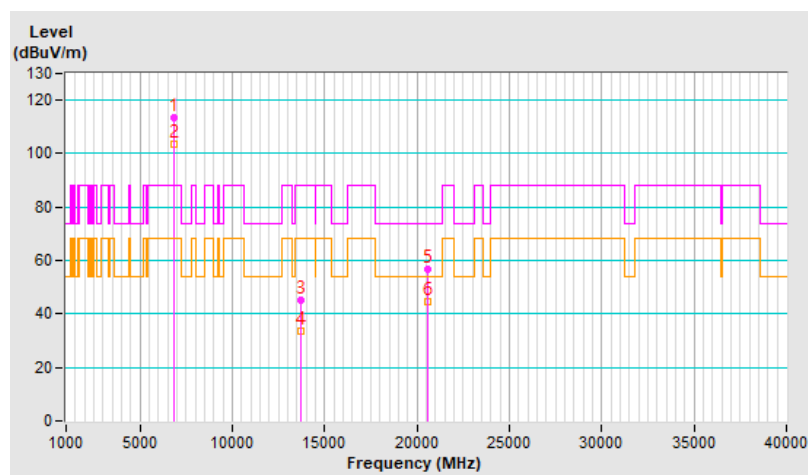


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.8 PK	88.2	-22.4	1.00 H	0	60.2	5.6
2	#5925.00	50.0 AV	68.2	-18.2	1.00 H	0	44.4	5.6
3	*5985.00	104.7 PK			1.26 H	166	99.2	5.5
4	*5985.00	92.4 AV			1.26 H	166	86.9	5.5
5	11970.00	47.1 PK	74.0	-26.9	1.64 H	8	32.6	14.5
6	11970.00	35.0 AV	54.0	-19.0	1.64 H	8	20.5	14.5
7	17955.00	56.5 PK	74.0	-17.5	1.74 H	30	28.2	28.3
8	17955.00	44.0 AV	54.0	-10.0	1.74 H	30	15.7	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

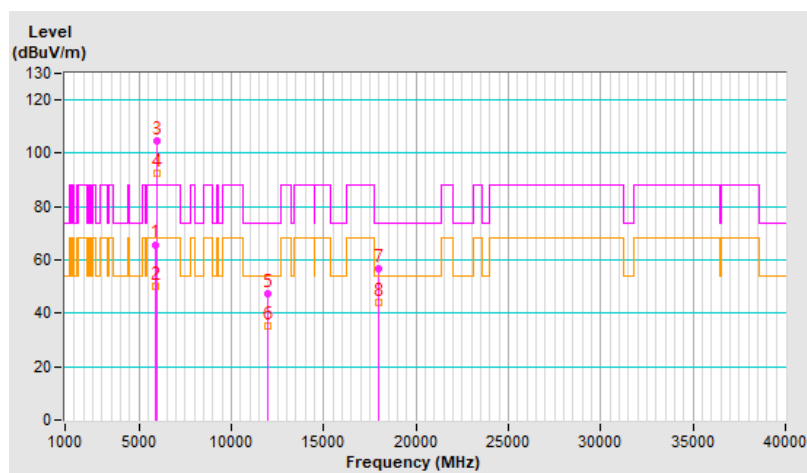


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.3 PK	88.2	-15.9	1.00 V	0	66.7	5.6
2	#5925.00	53.8 AV	68.2	-14.4	1.00 V	0	48.2	5.6
3	*5985.00	107.5 PK			1.52 V	46	102.0	5.5
4	*5985.00	95.5 AV			1.52 V	46	90.0	5.5
5	11970.00	45.9 PK	74.0	-28.1	1.61 V	19	31.4	14.5
6	11970.00	34.0 AV	54.0	-20.0	1.61 V	19	19.5	14.5
7	17955.00	56.4 PK	74.0	-17.6	1.75 V	41	28.1	28.3
8	17955.00	44.1 AV	54.0	-9.9	1.75 V	41	15.8	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

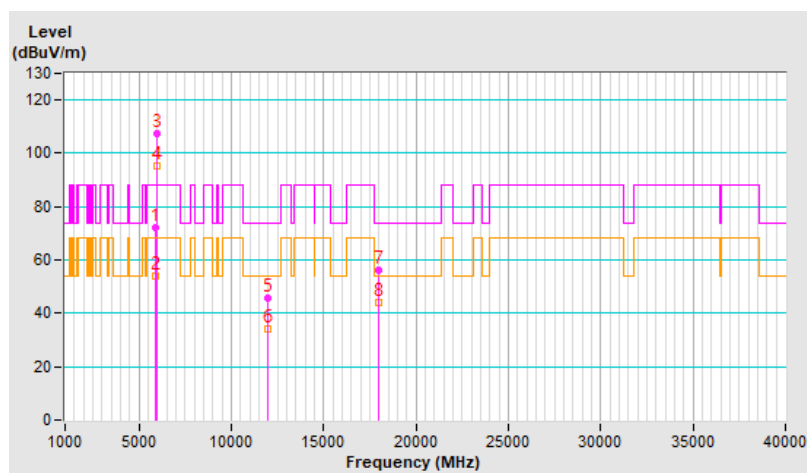


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	104.8 PK			1.24 H	151	98.2	6.6
2	*6385.00	92.3 AV			1.24 H	151	85.7	6.6
3	#12770.00	46.6 PK	88.2	-41.6	1.63 H	0	31.7	14.9
4	#12770.00	34.7 AV	68.2	-33.5	1.63 H	0	19.8	14.9
5	19155.00	56.2 PK	74.0	-17.8	1.74 H	39	60.9	-4.7
6	19155.00	44.0 AV	54.0	-10.0	1.74 H	39	48.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

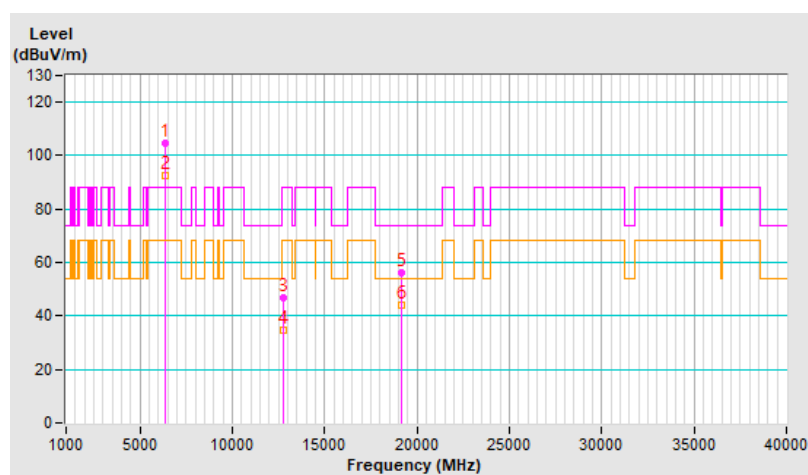


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.3 PK			1.55 V	61	100.7	6.6
2	*6385.00	95.5 AV			1.55 V	61	88.9	6.6
3	#12770.00	45.4 PK	88.2	-42.8	1.66 V	6	30.5	14.9
4	#12770.00	33.9 AV	68.2	-34.3	1.66 V	6	19.0	14.9
5	19155.00	55.7 PK	74.0	-18.3	1.81 V	36	60.4	-4.7
6	19155.00	43.7 AV	54.0	-10.3	1.81 V	36	48.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

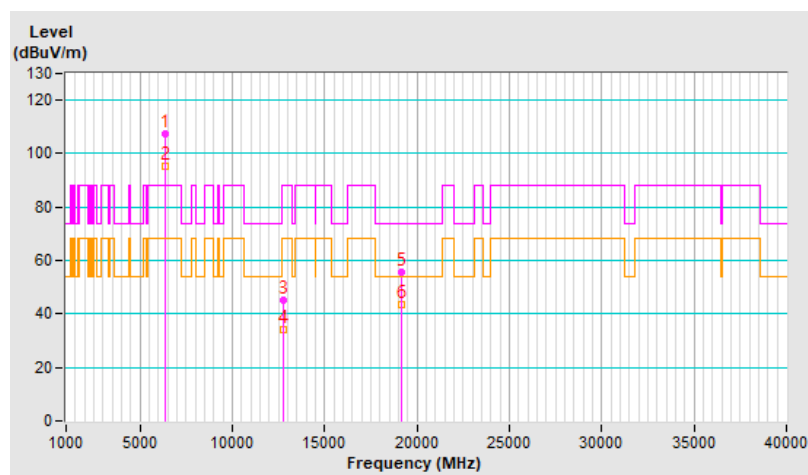


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	105.0 PK			1.21 H	157	97.2	7.8
2	*6625.00	92.5 AV			1.21 H	157	84.7	7.8
3	13250.00	47.3 PK	74.0	-26.7	1.64 H	2	31.9	15.4
4	13250.00	34.9 AV	54.0	-19.1	1.64 H	2	19.5	15.4
5	19875.00	56.1 PK	74.0	-17.9	1.75 H	38	60.6	-4.5
6	19875.00	44.0 AV	54.0	-10.0	1.75 H	38	48.5	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

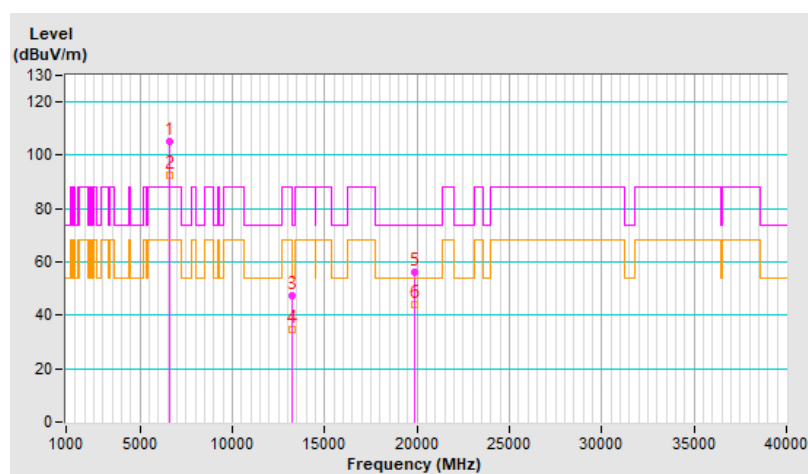


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.5 PK			1.52 V	54	99.7	7.8
2	*6625.00	95.4 AV			1.52 V	54	87.6	7.8
3	13250.00	46.2 PK	74.0	-27.8	1.69 V	20	30.8	15.4
4	13250.00	34.4 AV	54.0	-19.6	1.69 V	20	19.0	15.4
5	19875.00	56.3 PK	74.0	-17.7	1.74 V	37	60.8	-4.5
6	19875.00	44.2 AV	54.0	-9.8	1.74 V	37	48.7	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

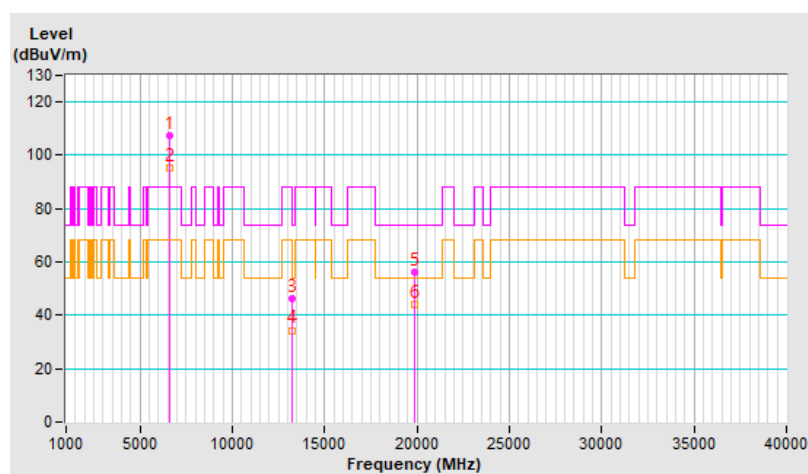


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.0 PK			2.16 H	208	104.3	7.7
2	*6785.00	98.9 AV			2.16 H	208	91.2	7.7
3	#13570.00	47.1 PK	88.2	-41.1	1.72 H	6	31.4	15.7
4	#13570.00	34.6 AV	68.2	-33.6	1.72 H	6	18.9	15.7
5	20355.00	56.9 PK	74.0	-17.1	1.71 H	23	60.7	-3.8
6	20355.00	44.5 AV	54.0	-9.5	1.71 H	23	48.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

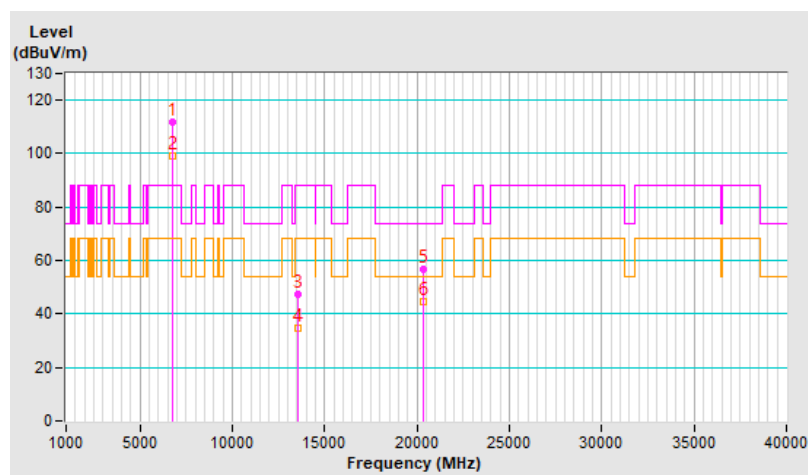


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.4 PK			1.50 V	148	99.7	7.7
2	*6785.00	96.1 AV			1.50 V	148	88.4	7.7
3	#13570.00	46.0 PK	88.2	-42.2	1.69 V	16	30.3	15.7
4	#13570.00	34.3 AV	68.2	-33.9	1.69 V	16	18.6	15.7
5	20355.00	56.6 PK	74.0	-17.4	1.71 V	66	60.4	-3.8
6	20355.00	44.6 AV	54.0	-9.4	1.71 V	66	48.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

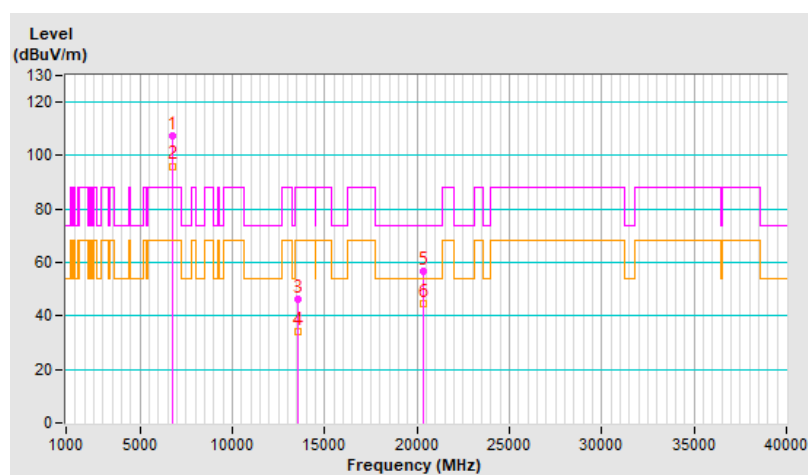


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5974.70	83.2 PK	88.2	-5.0	1.36 H	165	77.7	5.5
2	#5974.70	55.2 AV	68.2	-13.0	1.36 H	165	49.7	5.5
3	*6025.00	102.5 PK			1.36 H	165	96.9	5.6
4	*6025.00	90.8 AV			1.36 H	165	85.2	5.6
5	12050.00	46.5 PK	74.0	-27.5	1.71 H	13	31.9	14.6
6	12050.00	34.5 AV	54.0	-19.5	1.71 H	13	19.9	14.6
7	18075.00	57.4 PK	74.0	-16.6	1.71 H	33	62.7	-5.3
8	18075.00	44.8 AV	54.0	-9.2	1.71 H	33	50.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

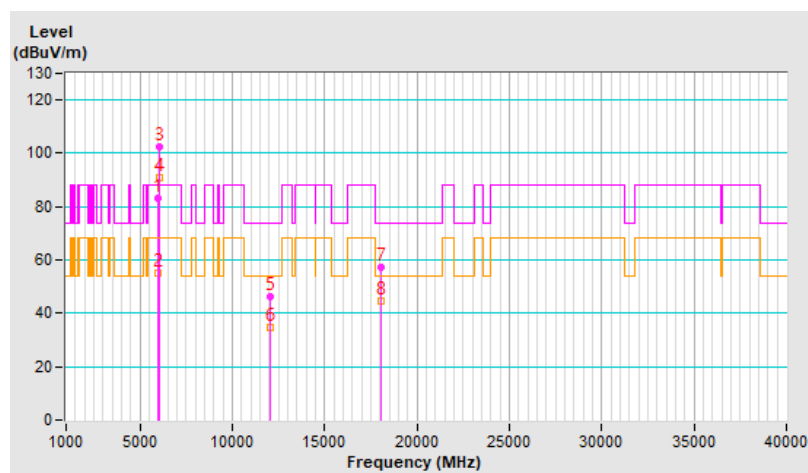


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5832.70	86.8 PK	88.2	-1.4	1.52 V	50	81.5	5.3
2	#5832.70	59.7 AV	68.2	-8.5	1.52 V	50	54.4	5.3
3	*6025.00	105.2 PK			1.52 V	50	99.6	5.6
4	*6025.00	93.8 AV			1.52 V	50	88.2	5.6
5	12050.00	46.2 PK	74.0	-27.8	1.70 V	18	31.6	14.6
6	12050.00	34.2 AV	54.0	-19.8	1.70 V	18	19.6	14.6
7	18075.00	55.9 PK	74.0	-18.1	1.75 V	57	61.2	-5.3
8	18075.00	43.7 AV	54.0	-10.3	1.75 V	57	49.0	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

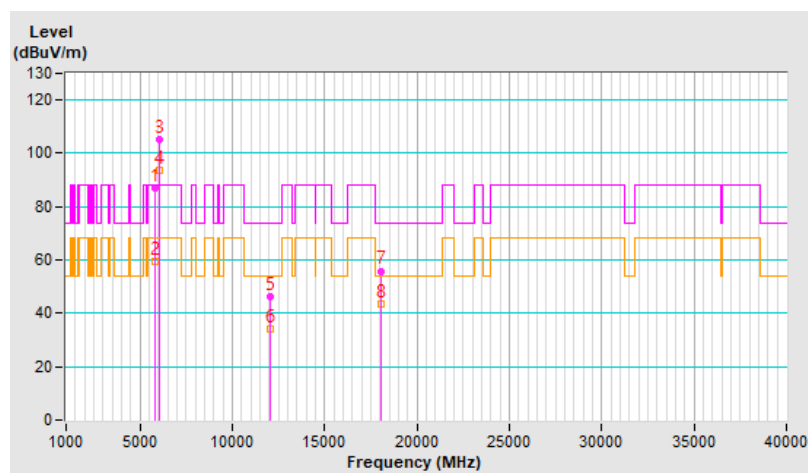


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	102.5 PK			1.33 H	159	96.1	6.4
2	*6345.00	90.6 AV			1.33 H	159	84.2	6.4
3	12690.00	46.3 PK	74.0	-27.7	1.66 H	3	31.4	14.9
4	12690.00	34.1 AV	54.0	-19.9	1.66 H	3	19.2	14.9
5	19035.00	56.5 PK	74.0	-17.5	1.76 H	19	61.4	-4.9
6	19035.00	44.2 AV	54.0	-9.8	1.76 H	19	49.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

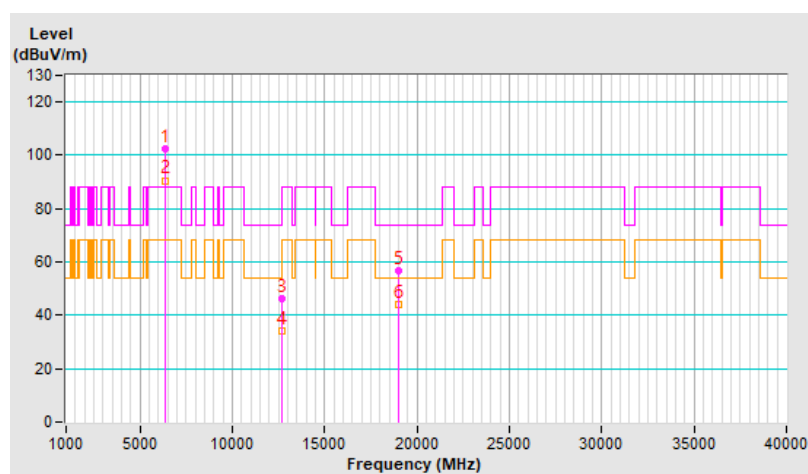


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.3 PK			1.58 V	40	98.9	6.4
2	*6345.00	93.7 AV			1.58 V	40	87.3	6.4
3	12690.00	45.7 PK	74.0	-28.3	1.59 V	23	30.8	14.9
4	12690.00	33.9 AV	54.0	-20.1	1.59 V	23	19.0	14.9
5	19035.00	55.6 PK	74.0	-18.4	1.72 V	66	60.5	-4.9
6	19035.00	43.7 AV	54.0	-10.3	1.72 V	66	48.6	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

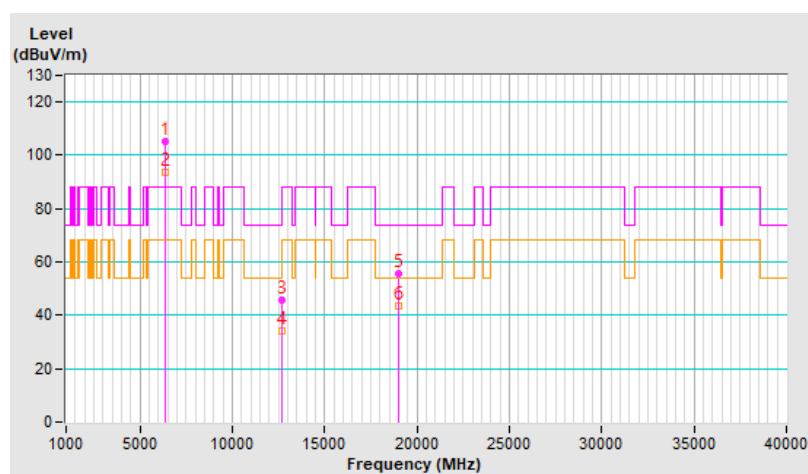


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.2 PK			2.14 H	202	96.4	7.8
2	*6665.00	92.7 AV			2.14 H	202	84.9	7.8
3	13330.00	47.1 PK	74.0	-26.9	1.71 H	0	31.8	15.3
4	13330.00	34.8 AV	54.0	-19.2	1.71 H	0	19.5	15.3
5	19995.00	56.6 PK	74.0	-17.4	1.74 H	48	61.0	-4.4
6	19995.00	44.5 AV	54.0	-9.5	1.74 H	48	48.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

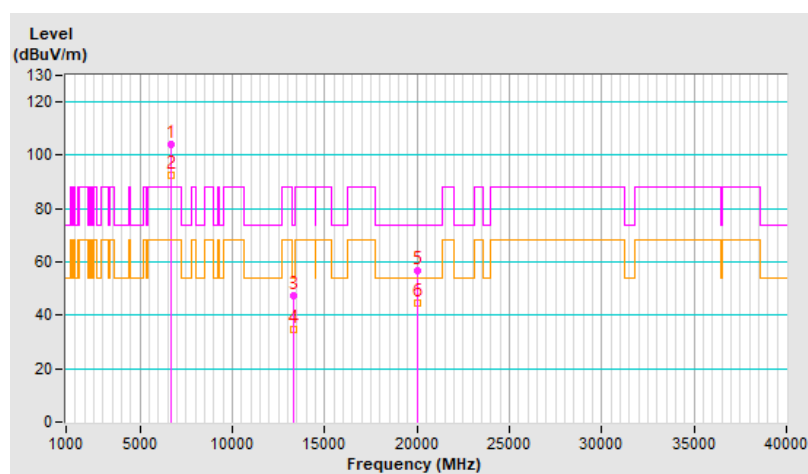


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.1 PK			1.36 V	324	93.3	7.8
2	*6665.00	89.6 AV			1.36 V	324	81.8	7.8
3	13330.00	46.1 PK	74.0	-27.9	1.61 V	15	30.8	15.3
4	13330.00	34.5 AV	54.0	-19.5	1.61 V	15	19.2	15.3
5	19995.00	55.8 PK	74.0	-18.2	1.80 V	49	60.2	-4.4
6	19995.00	43.6 AV	54.0	-10.4	1.80 V	49	48.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

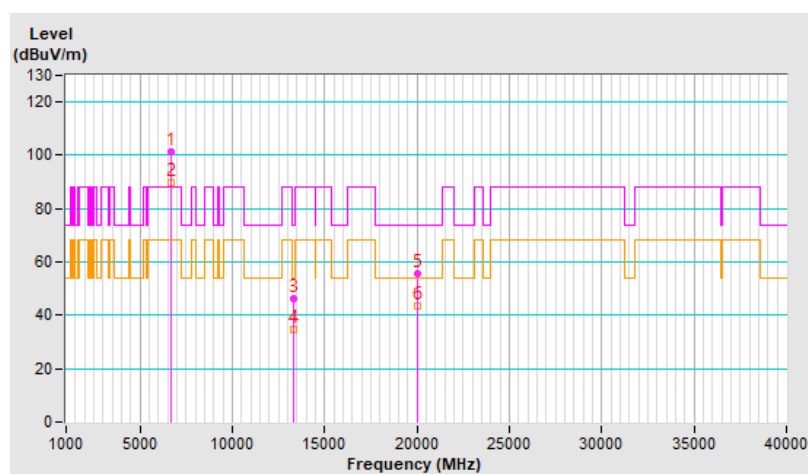


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.4 PK	88.2	-11.8	1.17 H	169	70.8	5.6
2	#5925.00	54.4 AV	68.2	-13.8	1.17 H	169	48.8	5.6
3	*6025.00	101.6 PK			1.17 H	169	96.0	5.6
4	*6025.00	89.3 AV			1.17 H	169	83.7	5.6
5	12050.00	47.2 PK	74.0	-26.8	1.70 H	9	32.6	14.6
6	12050.00	34.7 AV	54.0	-19.3	1.70 H	9	20.1	14.6
7	18075.00	56.5 PK	74.0	-17.5	1.72 H	30	61.8	-5.3
8	18075.00	44.1 AV	54.0	-9.9	1.72 H	30	49.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

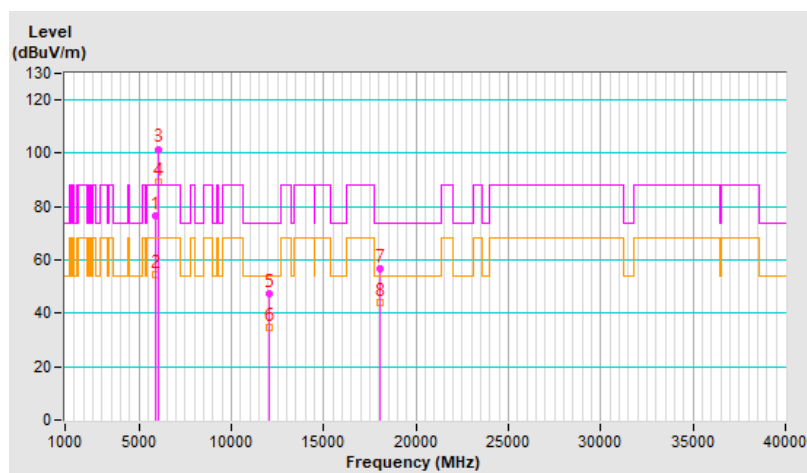


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.7 PK	88.2	-8.5	1.34 V	52	74.1	5.6
2	#5925.00	58.9 AV	68.2	-9.3	1.34 V	52	53.3	5.6
3	*6025.00	105.2 PK			1.34 V	52	99.6	5.6
4	*6025.00	93.4 AV			1.34 V	52	87.8	5.6
5	12050.00	46.2 PK	74.0	-27.8	1.67 V	21	31.6	14.6
6	12050.00	34.5 AV	54.0	-19.5	1.67 V	21	19.9	14.6
7	18075.00	56.2 PK	74.0	-17.8	1.72 V	35	61.5	-5.3
8	18075.00	44.2 AV	54.0	-9.8	1.72 V	35	49.5	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

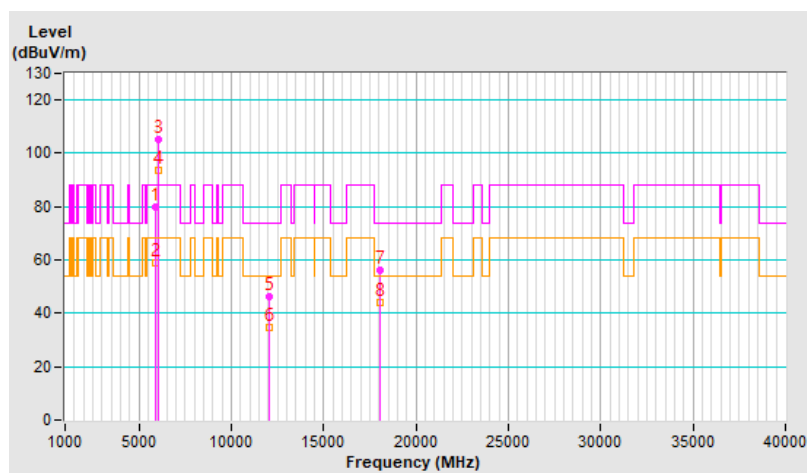


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	102.0 PK			1.13 H	175	95.6	6.4
2	*6345.00	89.7 AV			1.13 H	175	83.3	6.4
3	12690.00	46.3 PK	74.0	-27.7	1.72 H	5	31.4	14.9
4	12690.00	34.3 AV	54.0	-19.7	1.72 H	5	19.4	14.9
5	19035.00	56.4 PK	74.0	-17.6	1.76 H	27	61.3	-4.9
6	19035.00	44.2 AV	54.0	-9.8	1.76 H	27	49.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

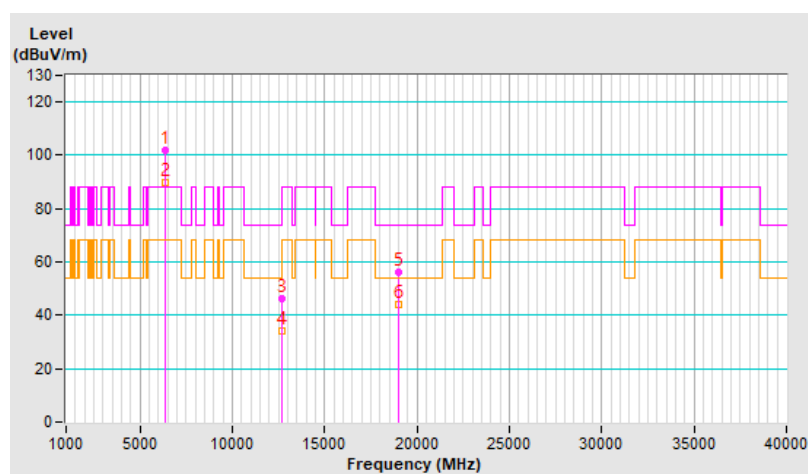


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.5 PK			1.32 V	40	98.1	6.4
2	*6345.00	93.0 AV			1.32 V	40	86.6	6.4
3	12690.00	45.9 PK	74.0	-28.1	1.69 V	24	31.0	14.9
4	12690.00	33.9 AV	54.0	-20.1	1.69 V	24	19.0	14.9
5	19035.00	55.8 PK	74.0	-18.2	1.73 V	41	60.7	-4.9
6	19035.00	44.0 AV	54.0	-10.0	1.73 V	41	48.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

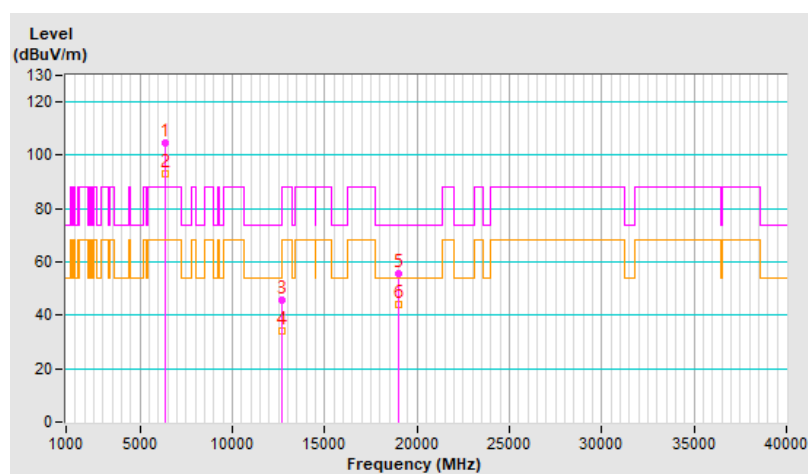


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.1 PK			2.19 H	202	96.3	7.8
2	*6665.00	92.6 AV			2.19 H	202	84.8	7.8
3	13330.00	46.2 PK	74.0	-27.8	1.66 H	5	30.9	15.3
4	13330.00	34.3 AV	54.0	-19.7	1.66 H	5	19.0	15.3
5	19995.00	56.5 PK	74.0	-17.5	1.77 H	46	60.9	-4.4
6	19995.00	44.0 AV	54.0	-10.0	1.77 H	46	48.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

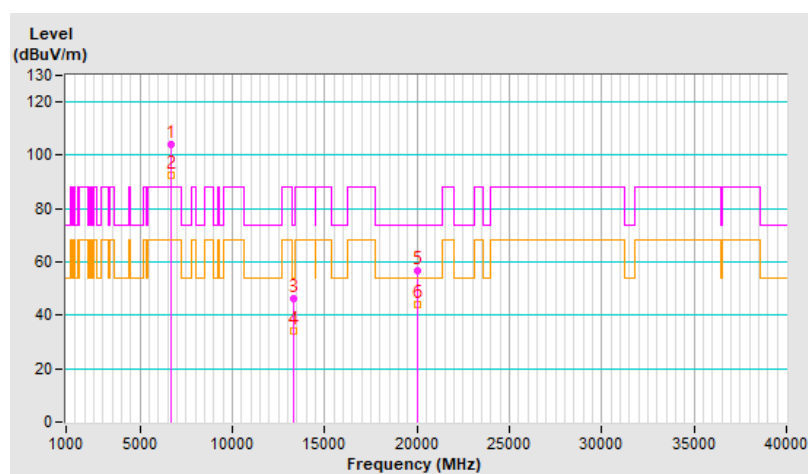


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.1 PK			1.43 V	323	93.3	7.8
2	*6665.00	90.3 AV			1.43 V	323	82.5	7.8
3	13330.00	46.1 PK	74.0	-27.9	1.67 V	19	30.8	15.3
4	13330.00	34.3 AV	54.0	-19.7	1.67 V	19	19.0	15.3
5	19995.00	56.2 PK	74.0	-17.8	1.71 V	35	60.6	-4.4
6	19995.00	44.1 AV	54.0	-9.9	1.71 V	35	48.5	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

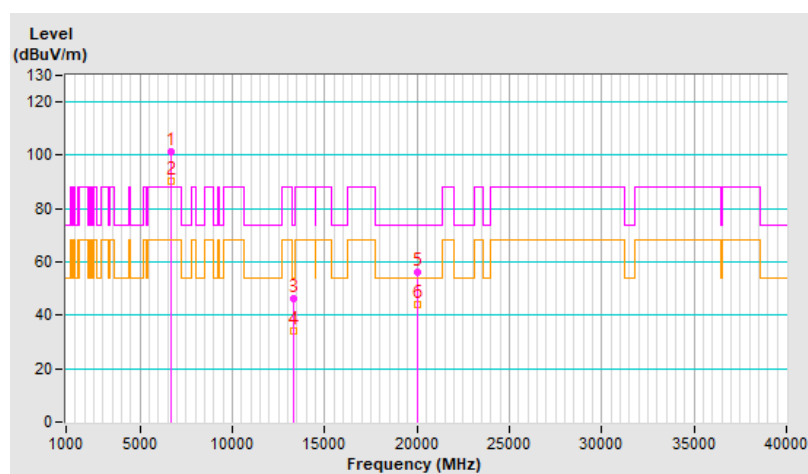


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

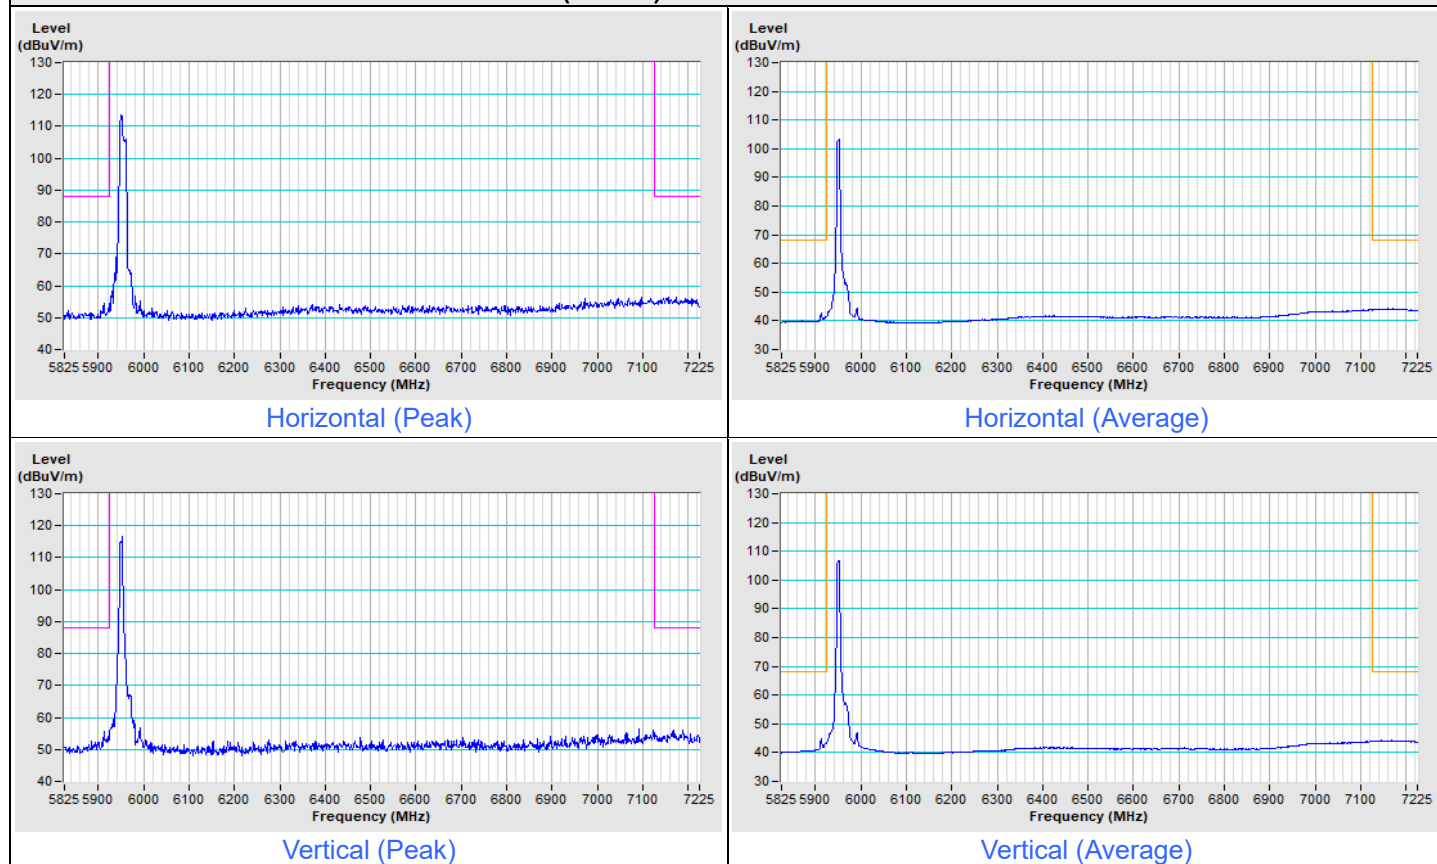


802.11be (EHT20) 52+26-tone MRU Channel 181

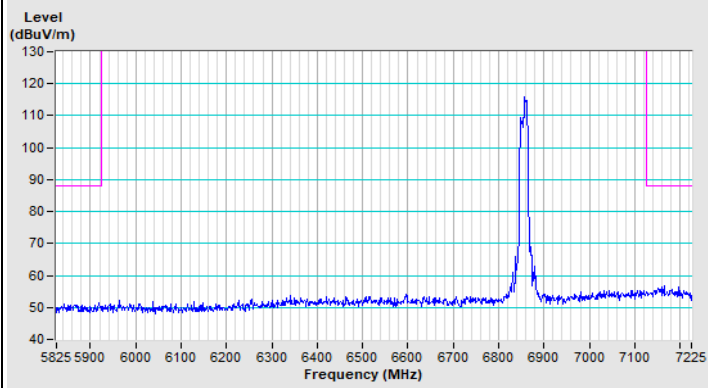


Horizontal (Peak)

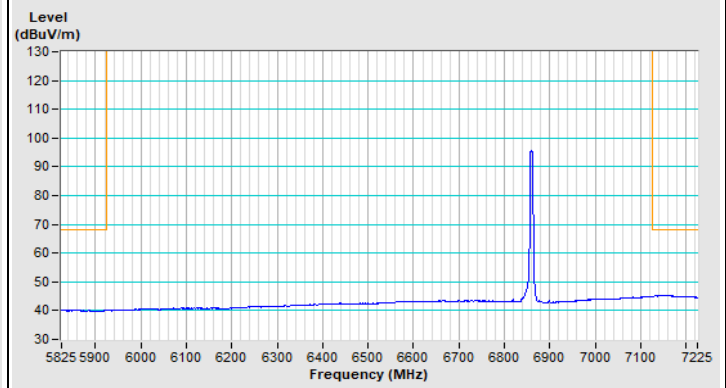

Horizontal (Average)

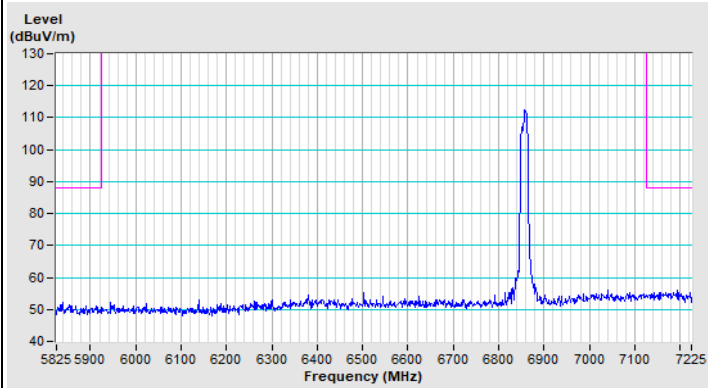


Vertical (Peak)

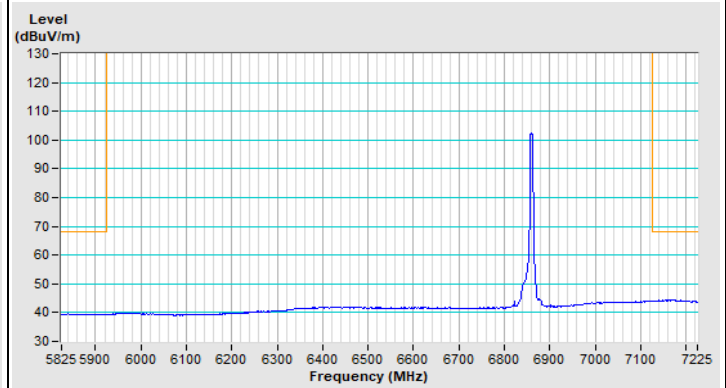


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

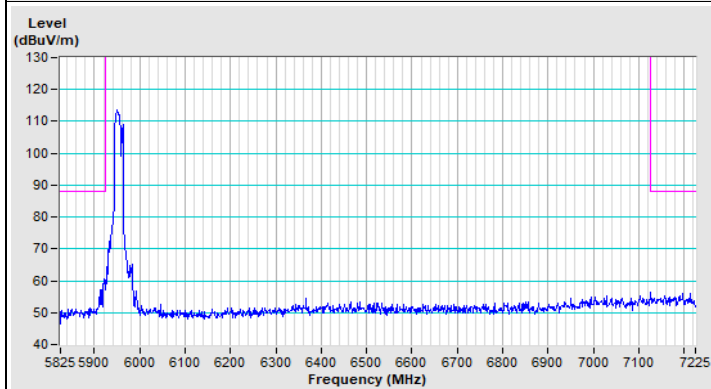


Horizontal (Peak)

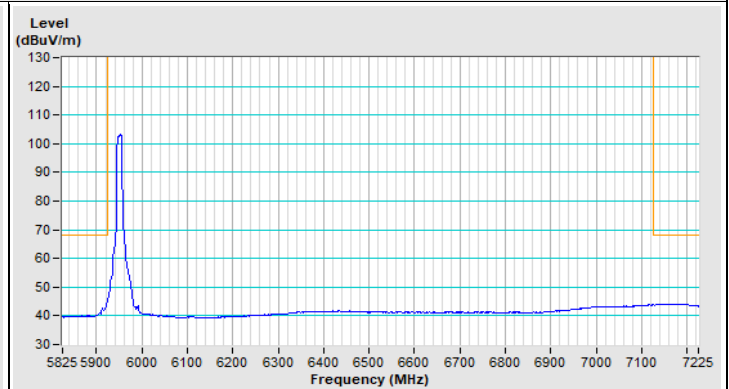

Horizontal (Average)

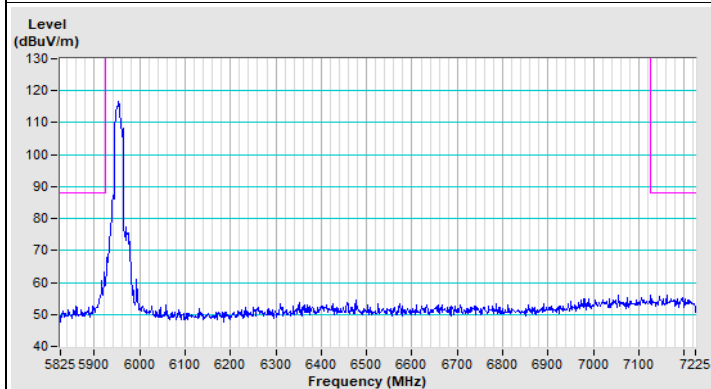


Vertical (Peak)

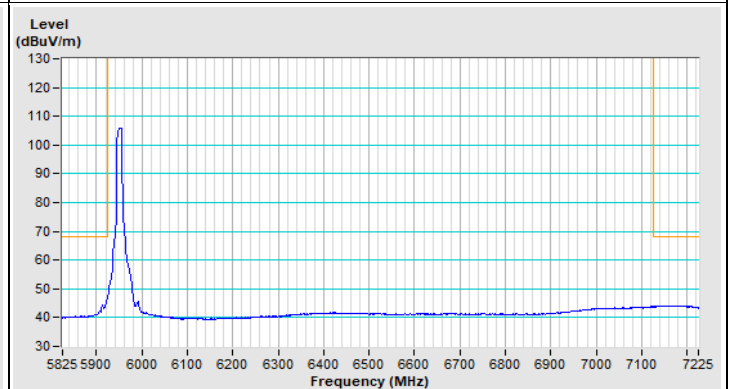


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 181

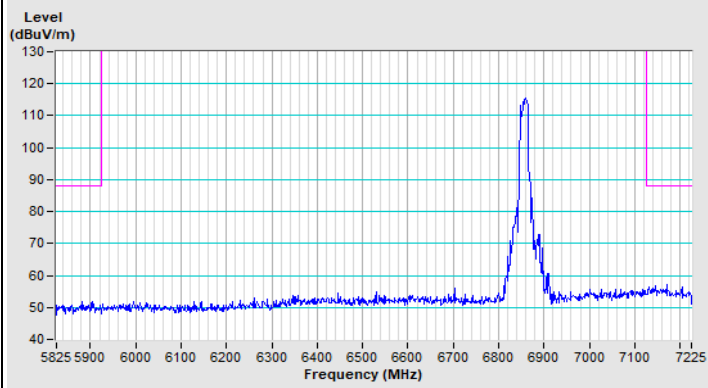


Horizontal (Peak)

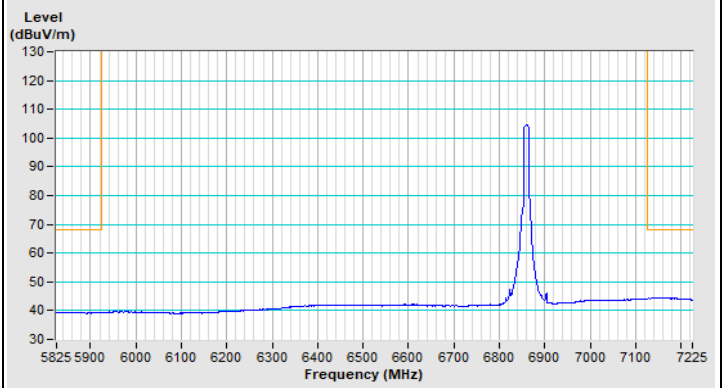

Horizontal (Average)

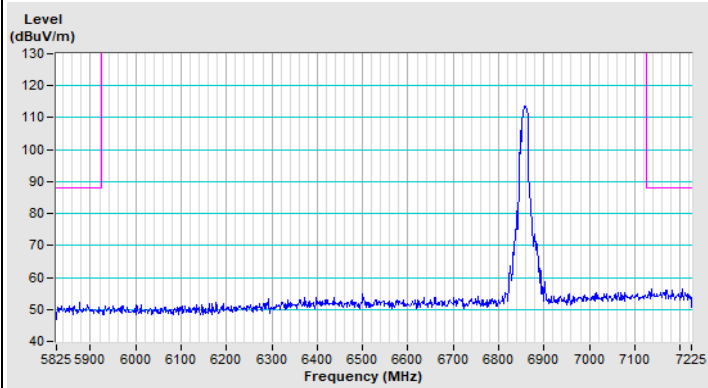


Vertical (Peak)

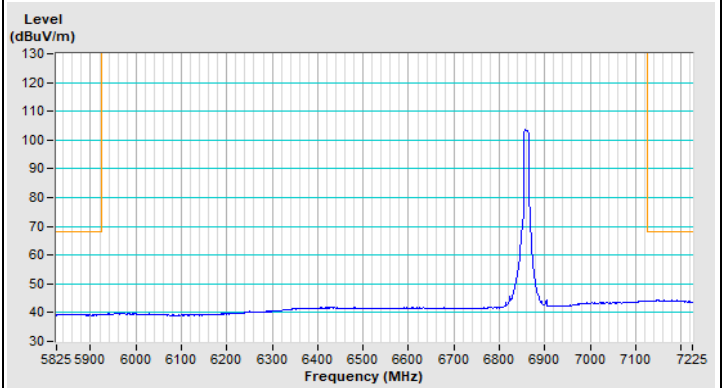


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

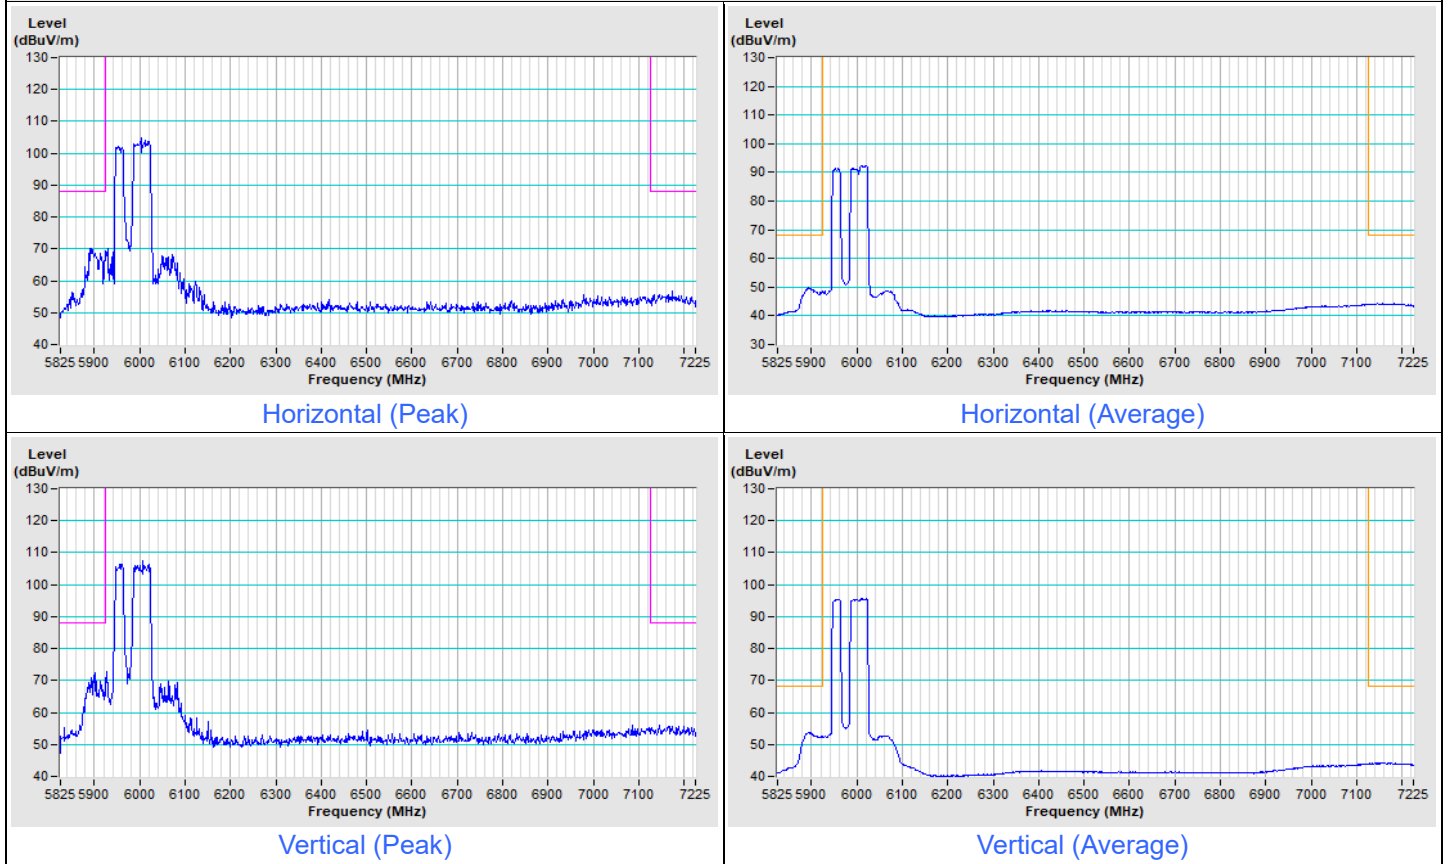


802.11be (EHT80) 484+242-tone MRU Channel 167

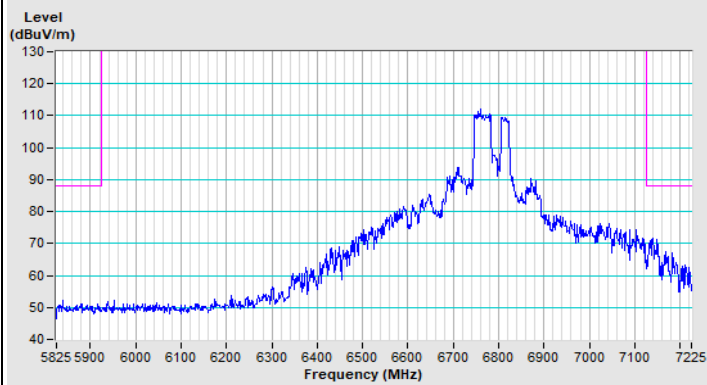


Horizontal (Peak)

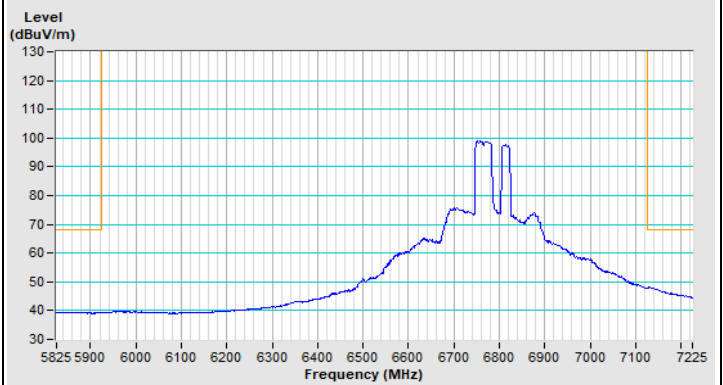

Horizontal (Average)

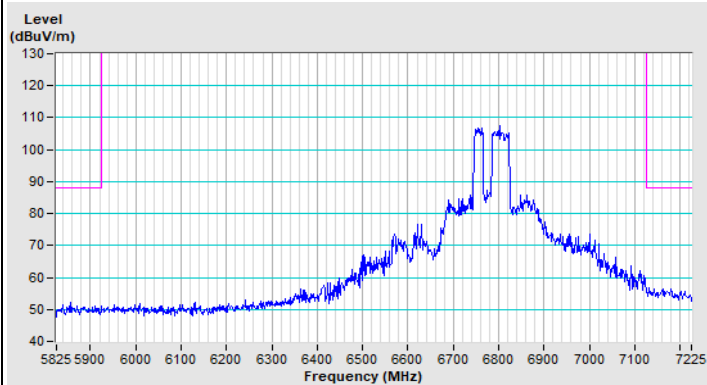


Vertical (Peak)

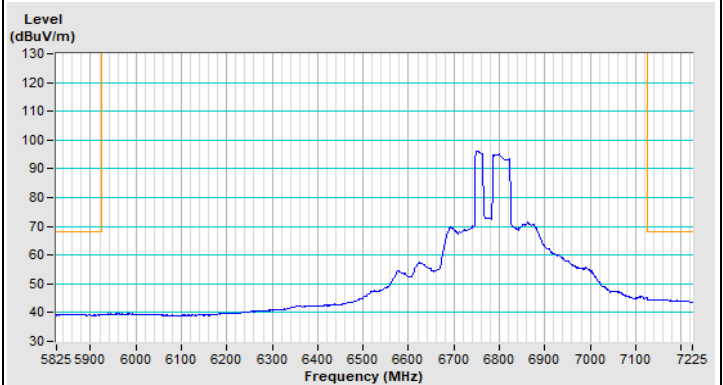


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

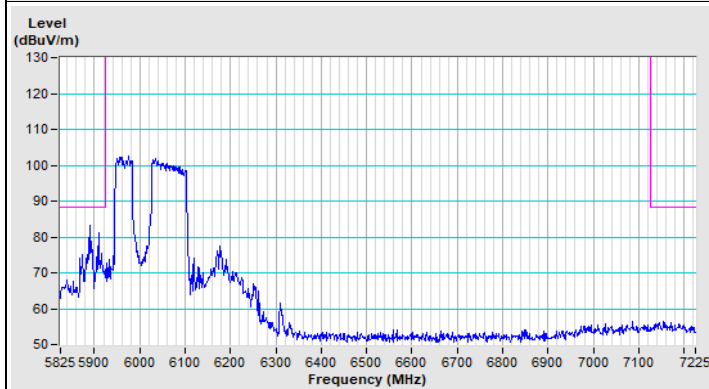


Horizontal (Peak)

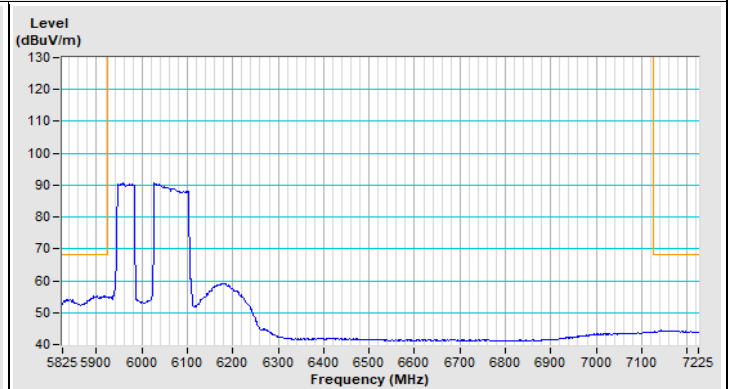

Horizontal (Average)

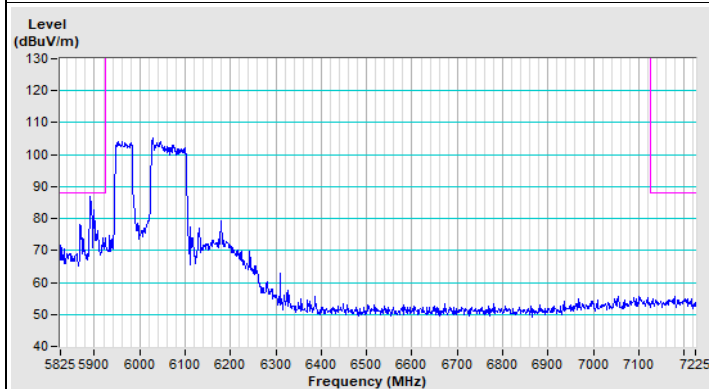


Vertical (Peak)

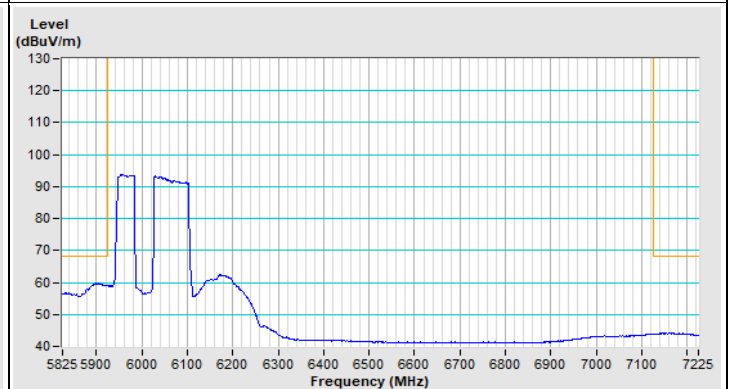


Vertical (Average)


802.11be (EHT160) 996+484-tone MRU Channel 143

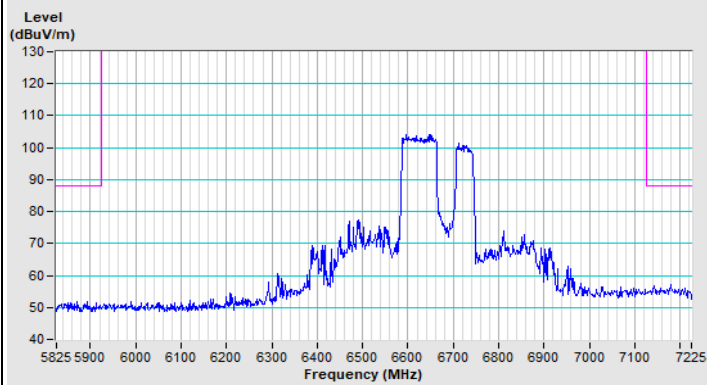


Horizontal (Peak)

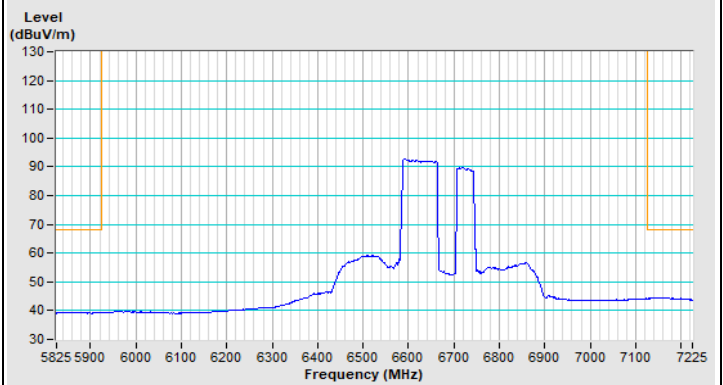

Horizontal (Average)

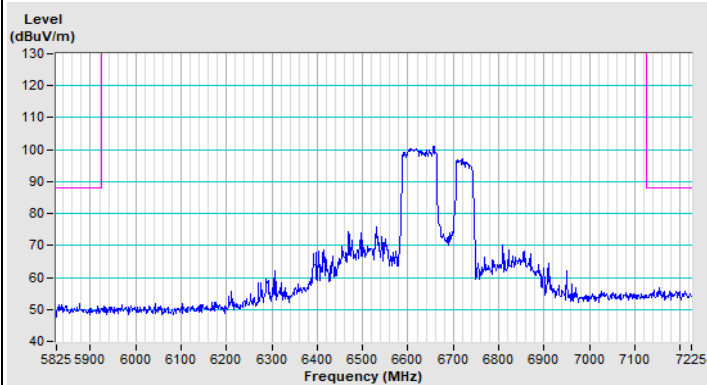


Vertical (Peak)

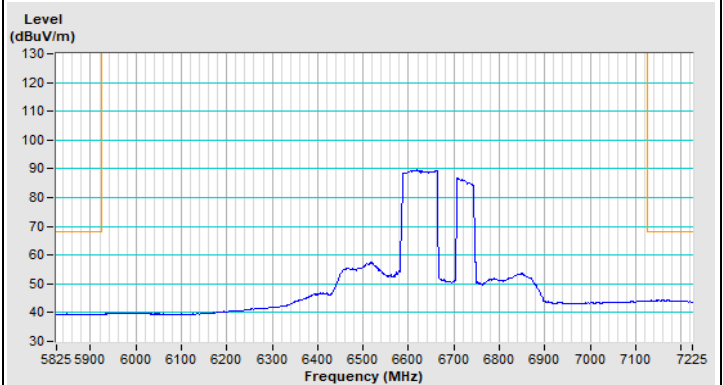


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

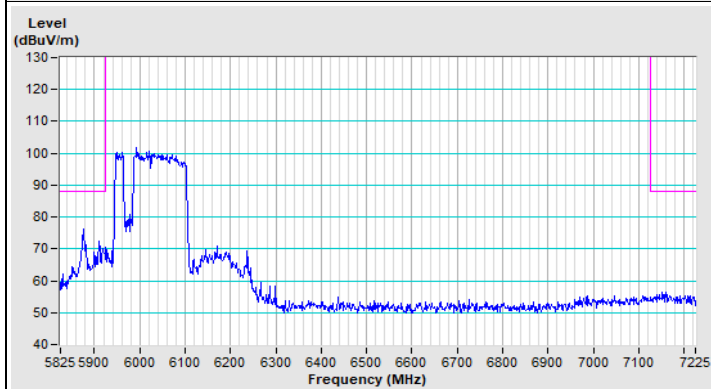


Horizontal (Peak)

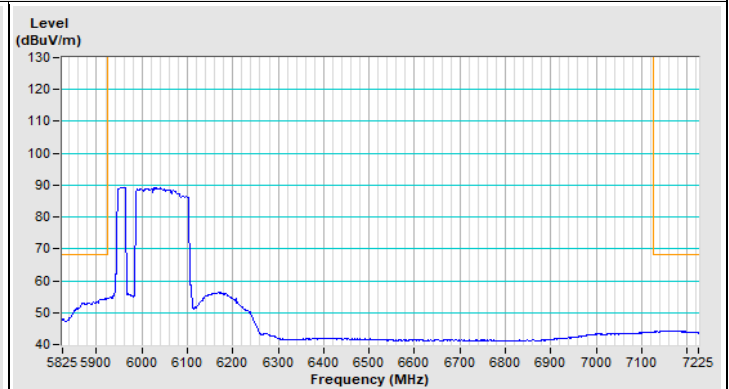

Horizontal (Average)

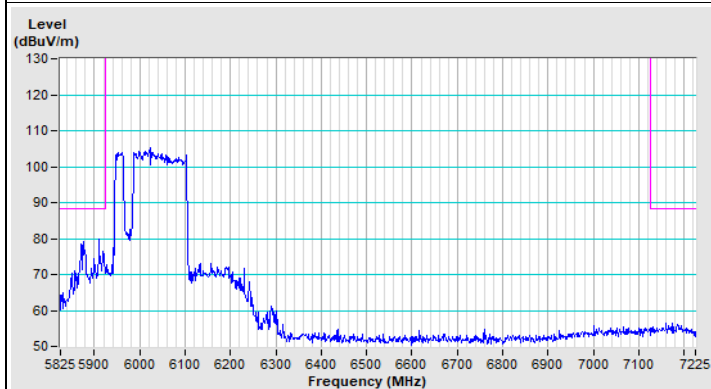


Vertical (Peak)

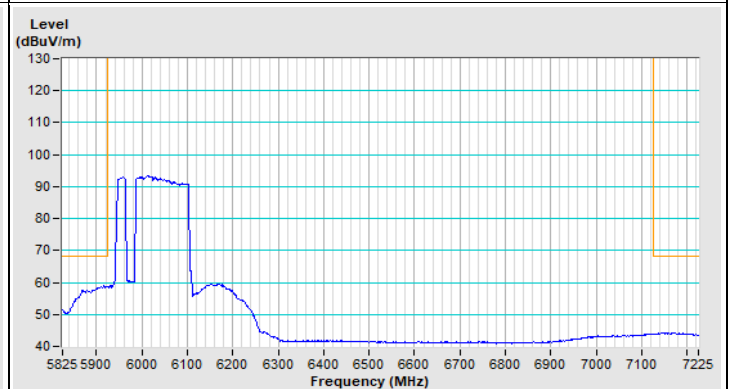


Vertical (Average)


802.11be (EHT160) 996+484+242-tone MRU Channel 143

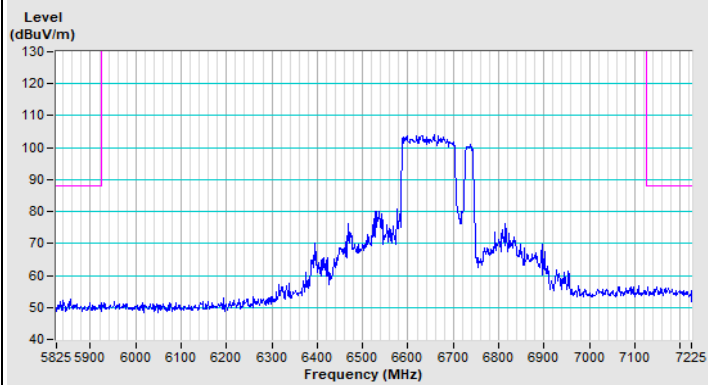


Horizontal (Peak)

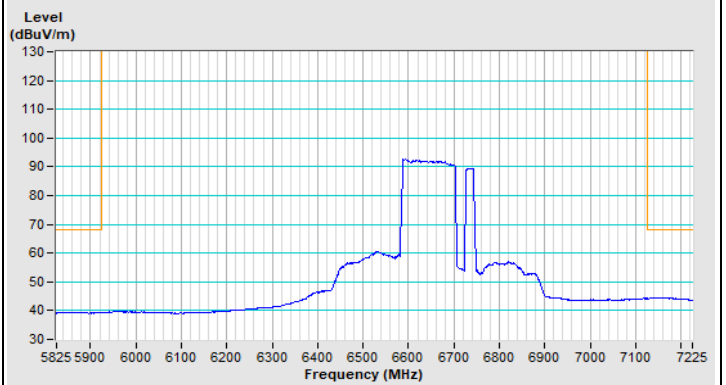

Horizontal (Average)

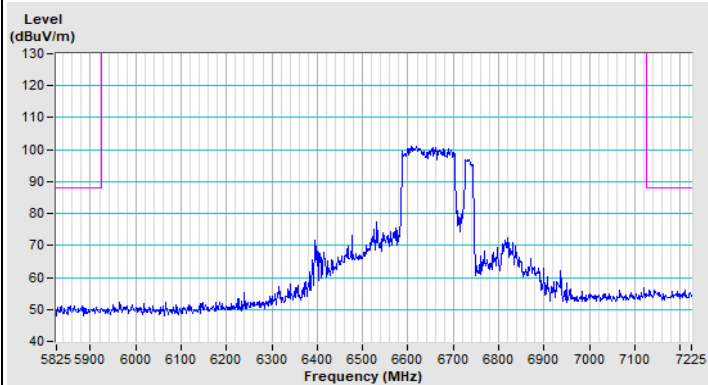

Vertical (Peak)

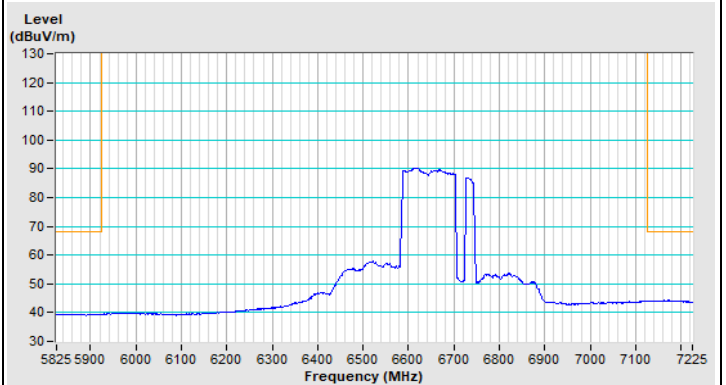

Vertical (Average)


Mode C_1TX

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.4 PK	88.2	-36.8	1.00 H	220	45.8	5.6
2	#5925.00	39.8 AV	68.2	-28.4	1.00 H	220	34.2	5.6
3	*5955.00	104.1 PK			1.00 H	220	98.6	5.5
4	*5955.00	93.5 AV			1.00 H	220	88.0	5.5
5	11910.00	47.0 PK	74.0	-27.0	1.75 H	264	32.4	14.6
6	11910.00	36.2 AV	54.0	-17.8	1.75 H	264	21.6	14.6
7	17865.00	49.1 PK	74.0	-24.9	2.65 H	155	23.2	25.9
8	17865.00	37.8 AV	54.0	-16.2	2.65 H	155	11.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

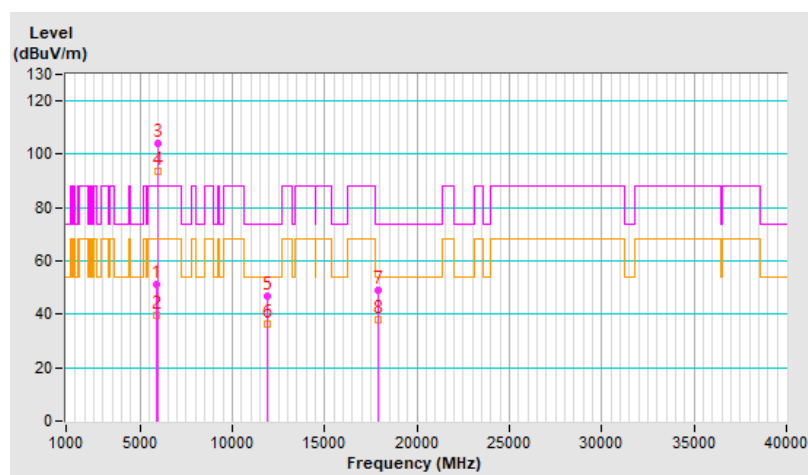


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.5 PK	88.2	-35.7	1.82 V	259	46.9	5.6
2	#5925.00	42.7 AV	68.2	-25.5	1.82 V	259	37.1	5.6
3	*5955.00	114.6 PK			1.82 V	259	109.1	5.5
4	*5955.00	104.5 AV			1.82 V	259	99.0	5.5
5	11910.00	46.8 PK	74.0	-27.2	1.77 V	271	32.2	14.6
6	11910.00	36.4 AV	54.0	-17.6	1.77 V	271	21.8	14.6
7	17865.00	49.4 PK	74.0	-24.6	2.63 V	144	23.5	25.9
8	17865.00	38.5 AV	54.0	-15.5	2.63 V	144	12.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

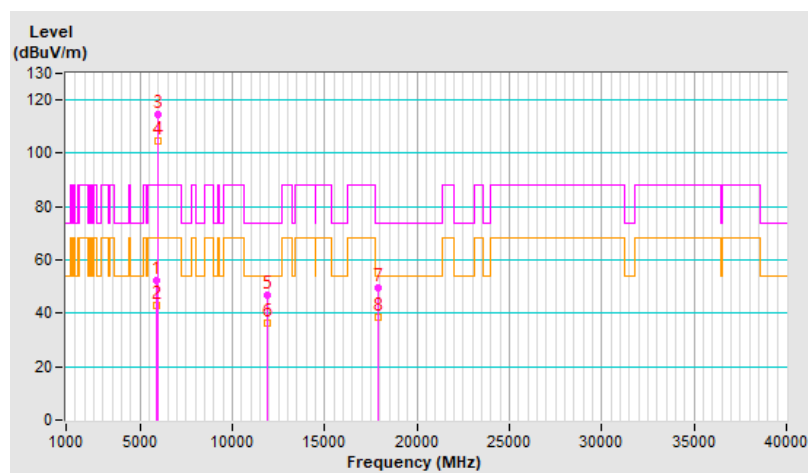


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	103.8 PK			1.00 H	226	97.0	6.8
2	*6415.00	93.4 AV			1.00 H	226	86.6	6.8
3	#12830.00	47.2 PK	88.2	-41.0	1.80 H	273	32.1	15.1
4	#12830.00	36.6 AV	68.2	-31.6	1.80 H	273	21.5	15.1
5	19245.00	49.5 PK	74.0	-24.5	2.68 H	169	54.1	-4.6
6	19245.00	38.2 AV	54.0	-15.8	2.68 H	169	42.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

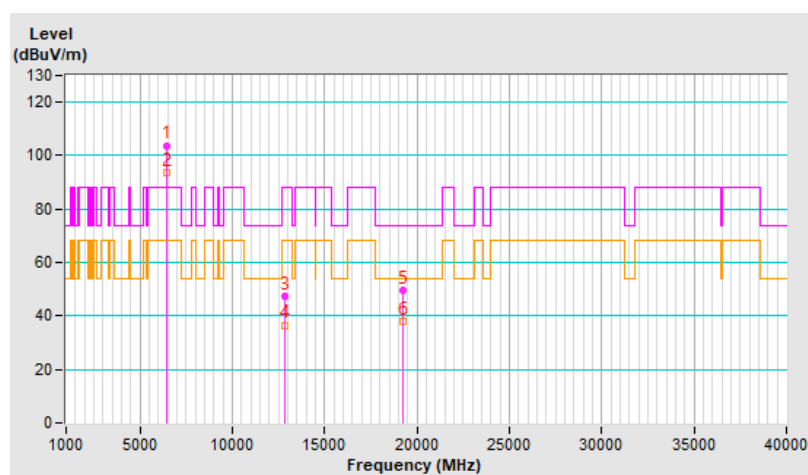


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.3 PK			1.85 V	246	108.5	6.8
2	*6415.00	104.9 AV			1.85 V	246	98.1	6.8
3	#12830.00	46.6 PK	88.2	-41.6	1.77 V	264	31.5	15.1
4	#12830.00	36.3 AV	68.2	-31.9	1.77 V	264	21.2	15.1
5	19245.00	49.3 PK	74.0	-24.7	2.67 V	149	53.9	-4.6
6	19245.00	38.2 AV	54.0	-15.8	2.67 V	149	42.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

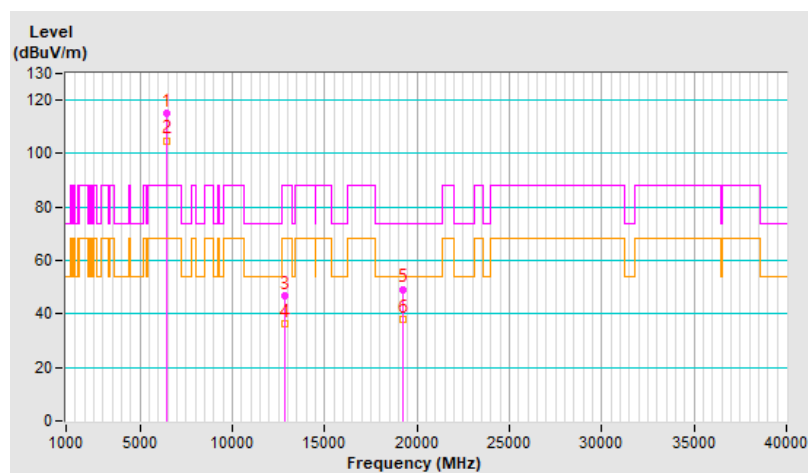


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	103.4 PK			1.00 H	224	96.0	7.4
2	*6535.00	93.1 AV			1.00 H	224	85.7	7.4
3	#13070.00	47.4 PK	88.2	-40.8	1.74 H	277	32.3	15.1
4	#13070.00	36.7 AV	68.2	-31.5	1.74 H	277	21.6	15.1
5	19605.00	49.3 PK	74.0	-24.7	2.60 H	152	54.1	-4.8
6	19605.00	38.1 AV	54.0	-15.9	2.60 H	152	42.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

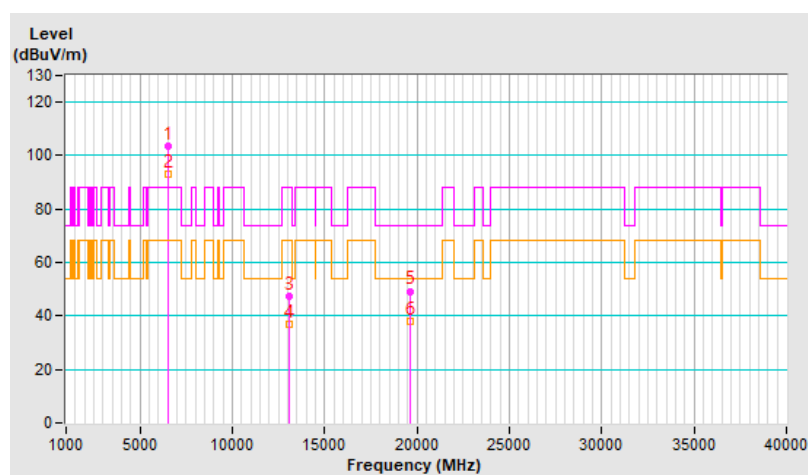


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.2 PK			1.10 V	83	108.8	7.4
2	*6535.00	106.0 AV			1.10 V	83	98.6	7.4
3	#13070.00	46.5 PK	88.2	-41.7	1.79 V	278	31.4	15.1
4	#13070.00	36.2 AV	68.2	-32.0	1.79 V	278	21.1	15.1
5	19605.00	49.9 PK	74.0	-24.1	2.62 V	168	54.7	-4.8
6	19605.00	38.5 AV	54.0	-15.5	2.62 V	168	43.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

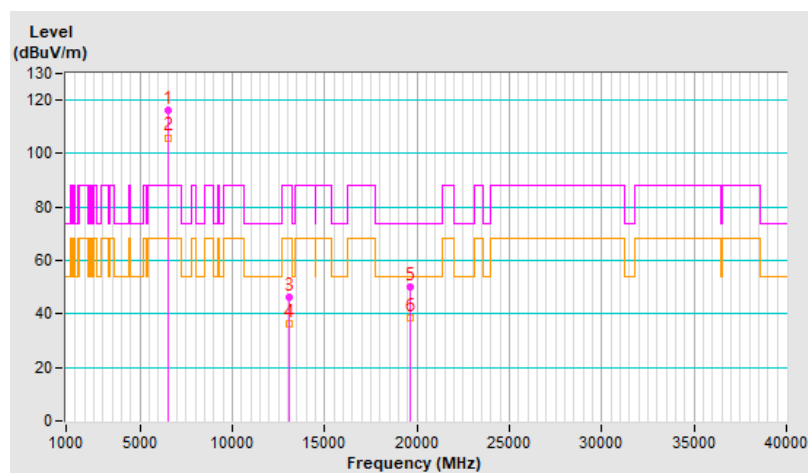


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	100.9 PK			1.68 H	311	92.7	8.2
2	*6855.00	90.6 AV			1.68 H	311	82.4	8.2
3	#13710.00	47.2 PK	88.2	-41.0	1.69 H	271	30.9	16.3
4	#13710.00	36.8 AV	68.2	-31.4	1.69 H	271	20.5	16.3
5	20565.00	48.9 PK	74.0	-25.1	2.67 H	158	52.6	-3.7
6	20565.00	38.0 AV	54.0	-16.0	2.67 H	158	41.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

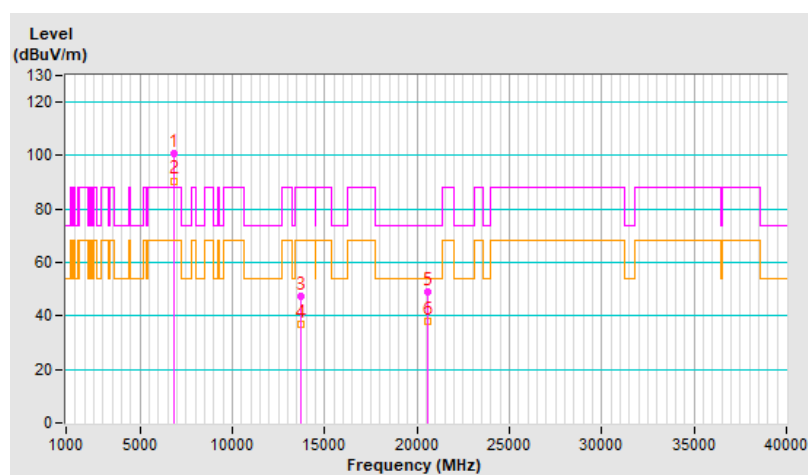


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.6 PK			1.14 V	90	107.4	8.2
2	*6855.00	105.6 AV			1.14 V	90	97.4	8.2
3	#13710.00	47.2 PK	88.2	-41.0	1.78 V	257	30.9	16.3
4	#13710.00	36.9 AV	68.2	-31.3	1.78 V	257	20.6	16.3
5	20565.00	48.9 PK	74.0	-25.1	2.70 V	153	52.6	-3.7
6	20565.00	37.8 AV	54.0	-16.2	2.70 V	153	41.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

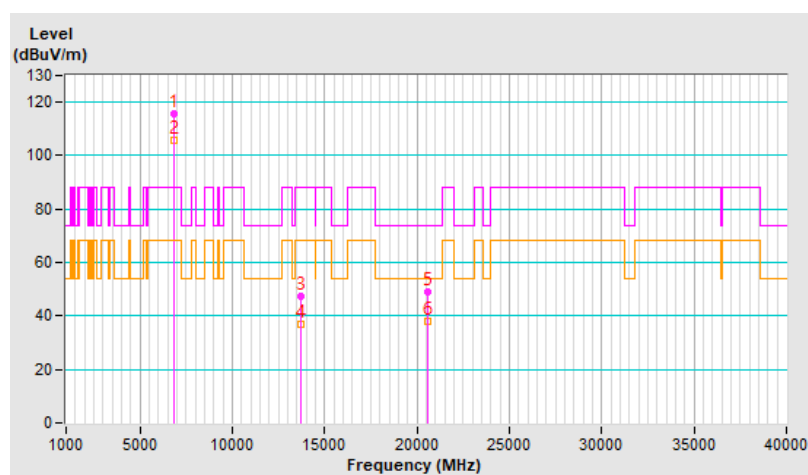


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.1 PK	88.2	-35.1	1.02 H	218	47.5	5.6
2	#5925.00	39.9 AV	68.2	-28.3	1.02 H	218	34.3	5.6
3	*5955.00	103.6 PK			1.02 H	218	98.1	5.5
4	*5955.00	93.0 AV			1.02 H	218	87.5	5.5
5	11910.00	47.0 PK	74.0	-27.0	1.81 H	270	32.4	14.6
6	11910.00	36.3 AV	54.0	-17.7	1.81 H	270	21.7	14.6
7	17865.00	49.8 PK	74.0	-24.2	2.66 H	160	23.9	25.9
8	17865.00	38.5 AV	54.0	-15.5	2.66 H	160	12.6	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

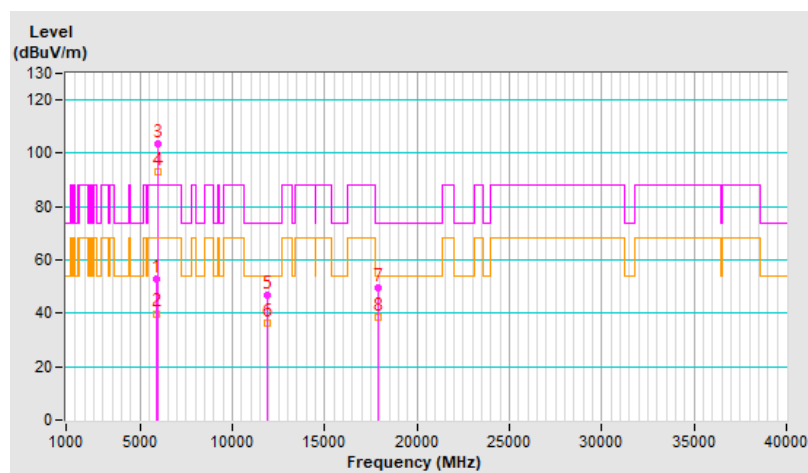


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.3 PK	88.2	-28.9	1.84 V	261	53.7	5.6
2	#5925.00	51.4 AV	68.2	-16.8	1.84 V	261	45.8	5.6
3	*5955.00	115.1 PK			1.84 V	261	109.6	5.5
4	*5955.00	104.9 AV			1.84 V	261	99.4	5.5
5	11910.00	46.9 PK	74.0	-27.1	1.69 V	270	32.3	14.6
6	11910.00	36.3 AV	54.0	-17.7	1.69 V	270	21.7	14.6
7	17865.00	49.2 PK	74.0	-24.8	2.71 V	166	23.3	25.9
8	17865.00	37.9 AV	54.0	-16.1	2.71 V	166	12.0	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

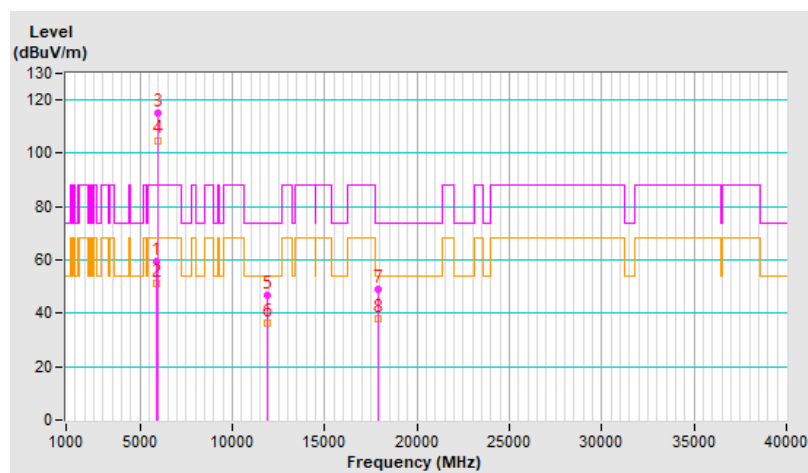


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	103.2 PK			1.02 H	208	96.4	6.8
2	*6415.00	92.8 AV			1.02 H	208	86.0	6.8
3	#12830.00	47.4 PK	88.2	-40.8	1.76 H	256	32.3	15.1
4	#12830.00	36.7 AV	68.2	-31.5	1.76 H	256	21.6	15.1
5	19245.00	49.3 PK	74.0	-24.7	2.69 H	167	53.9	-4.6
6	19245.00	38.3 AV	54.0	-15.7	2.69 H	167	42.9	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

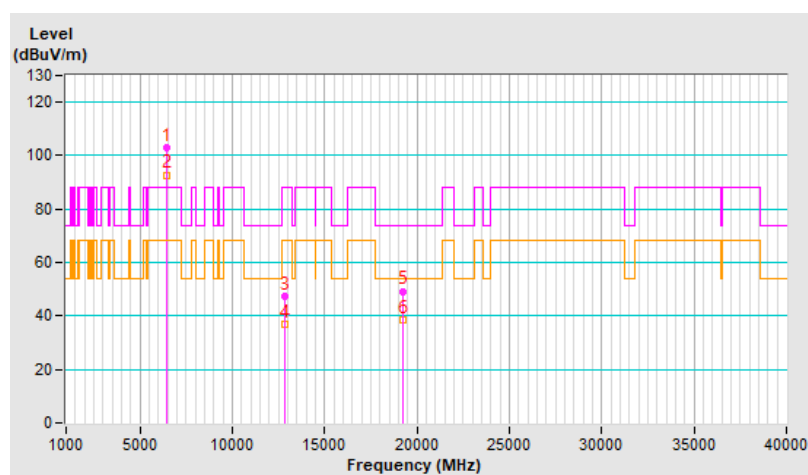


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.6 PK			1.79 V	273	108.8	6.8
2	*6415.00	105.2 AV			1.79 V	273	98.4	6.8
3	#12830.00	47.2 PK	88.2	-41.0	1.70 V	262	32.1	15.1
4	#12830.00	37.0 AV	68.2	-31.2	1.70 V	262	21.9	15.1
5	19245.00	49.2 PK	74.0	-24.8	2.60 V	143	53.8	-4.6
6	19245.00	38.2 AV	54.0	-15.8	2.60 V	143	42.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

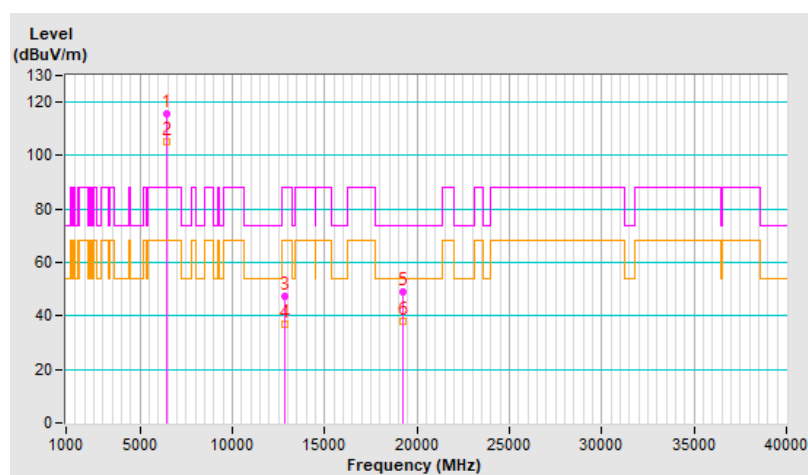


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	102.7 PK			1.12 H	238	95.3	7.4
2	*6535.00	93.2 AV			1.12 H	238	85.8	7.4
3	#13070.00	46.9 PK	88.2	-41.3	1.77 H	261	31.8	15.1
4	#13070.00	36.2 AV	68.2	-32.0	1.77 H	261	21.1	15.1
5	19605.00	49.8 PK	74.0	-24.2	2.71 H	162	54.6	-4.8
6	19605.00	38.6 AV	54.0	-15.4	2.71 H	162	43.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

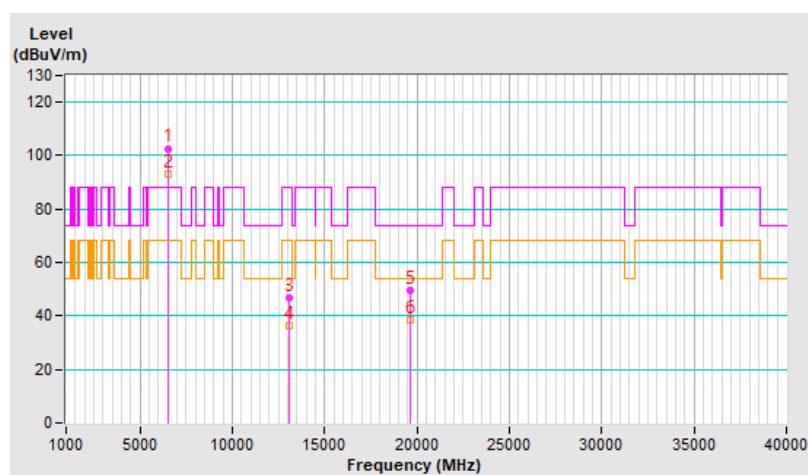


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.8 PK			1.09 V	94	108.4	7.4
2	*6535.00	105.7 AV			1.09 V	94	98.3	7.4
3	#13070.00	46.8 PK	88.2	-41.4	1.80 V	277	31.7	15.1
4	#13070.00	36.1 AV	68.2	-32.1	1.80 V	277	21.0	15.1
5	19605.00	49.2 PK	74.0	-24.8	2.66 V	153	54.0	-4.8
6	19605.00	37.8 AV	54.0	-16.2	2.66 V	153	42.6	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

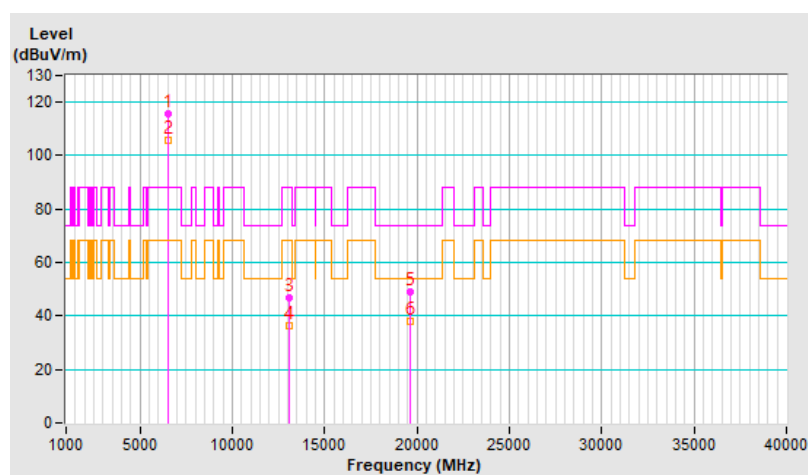


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	102.8 PK			1.06 H	225	94.6	8.2
2	*6855.00	93.2 AV			1.06 H	225	85.0	8.2
3	#13710.00	47.3 PK	88.2	-40.9	1.77 H	261	31.0	16.3
4	#13710.00	37.1 AV	68.2	-31.1	1.77 H	261	20.8	16.3
5	20565.00	49.2 PK	74.0	-24.8	2.64 H	163	52.9	-3.7
6	20565.00	38.0 AV	54.0	-16.0	2.64 H	163	41.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

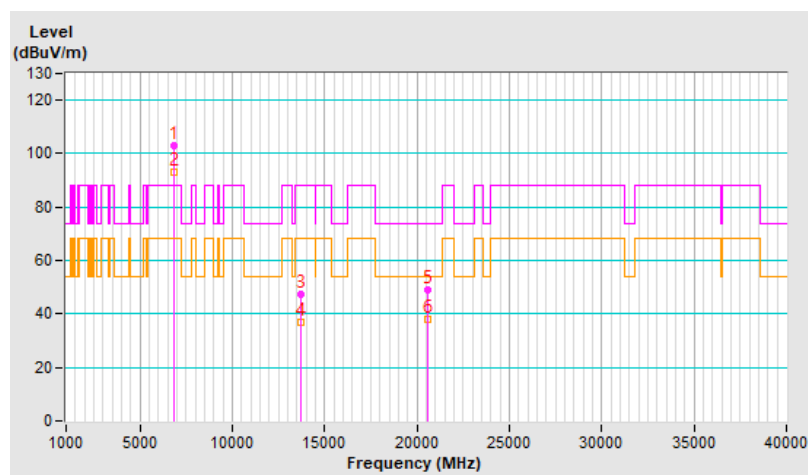


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.2 PK			1.12 V	87	108.0	8.2
2	*6855.00	105.9 AV			1.12 V	87	97.7	8.2
3	#13710.00	47.3 PK	88.2	-40.9	1.75 V	259	31.0	16.3
4	#13710.00	36.9 AV	68.2	-31.3	1.75 V	259	20.6	16.3
5	20565.00	48.9 PK	74.0	-25.1	2.62 V	144	52.6	-3.7
6	20565.00	37.8 AV	54.0	-16.2	2.62 V	144	41.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

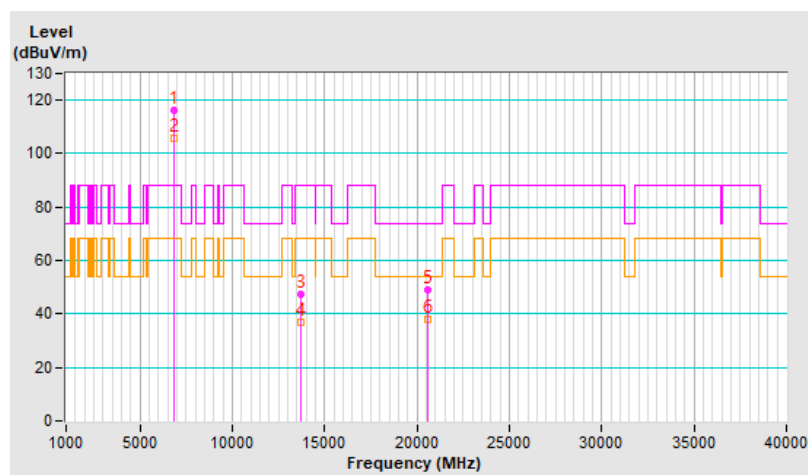


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.9 PK	88.2	-29.3	1.50 H	318	53.3	5.6
2	#5925.00	46.4 AV	68.2	-21.8	1.50 H	318	40.8	5.6
3	*5985.00	98.1 PK			1.50 H	318	92.6	5.5
4	*5985.00	87.6 AV			1.50 H	318	82.1	5.5
5	11970.00	47.0 PK	74.0	-27.0	1.76 H	280	32.5	14.5
6	11970.00	36.4 AV	54.0	-17.6	1.76 H	280	21.9	14.5
7	17955.00	49.7 PK	74.0	-24.3	2.60 H	142	21.4	28.3
8	17955.00	38.4 AV	54.0	-15.6	2.60 H	142	10.1	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

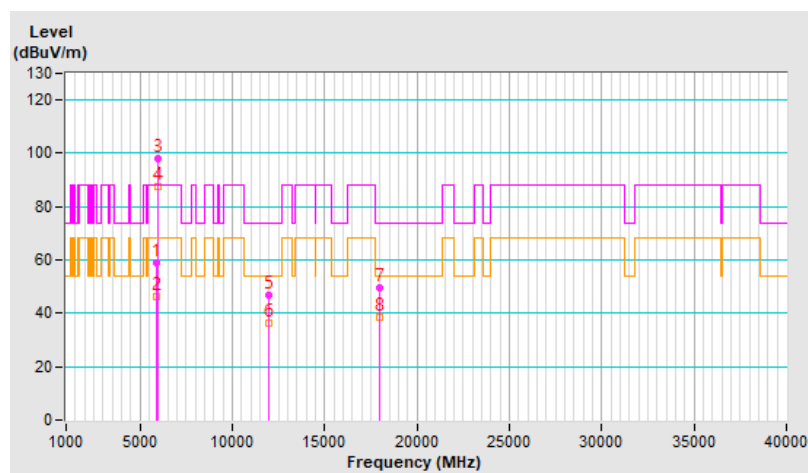


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.8 PK	88.2	-6.4	1.00 V	86	76.2	5.6
2	#5925.00	64.5 AV	68.2	-3.7	1.00 V	86	58.9	5.6
3	*5985.00	109.8 PK			1.00 V	86	104.3	5.5
4	*5985.00	98.0 AV			1.00 V	86	92.5	5.5
5	11970.00	47.3 PK	74.0	-26.7	1.80 V	269	32.8	14.5
6	11970.00	37.0 AV	54.0	-17.0	1.80 V	269	22.5	14.5
7	17955.00	49.2 PK	74.0	-24.8	2.60 V	163	20.9	28.3
8	17955.00	37.9 AV	54.0	-16.1	2.60 V	163	9.6	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

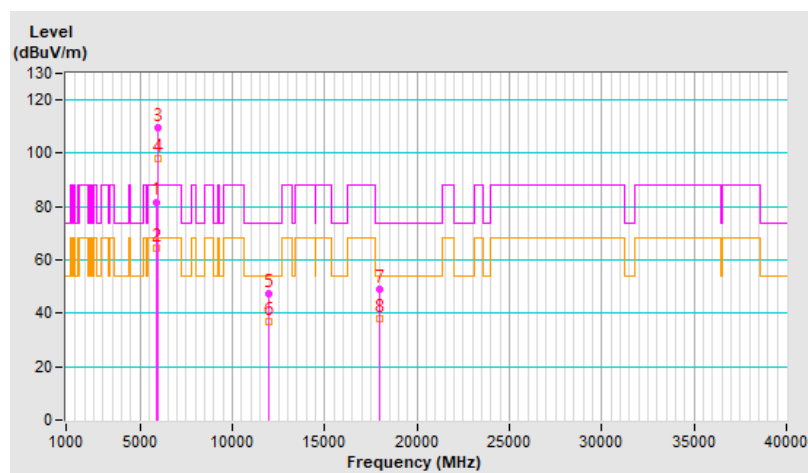


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	98.2 PK			1.13 H	231	91.6	6.6
2	*6385.00	87.8 AV			1.13 H	231	81.2	6.6
3	#12770.00	47.1 PK	88.2	-41.1	1.70 H	279	32.2	14.9
4	#12770.00	36.4 AV	68.2	-31.8	1.70 H	279	21.5	14.9
5	19155.00	49.4 PK	74.0	-24.6	2.65 H	141	54.1	-4.7
6	19155.00	38.1 AV	54.0	-15.9	2.65 H	141	42.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

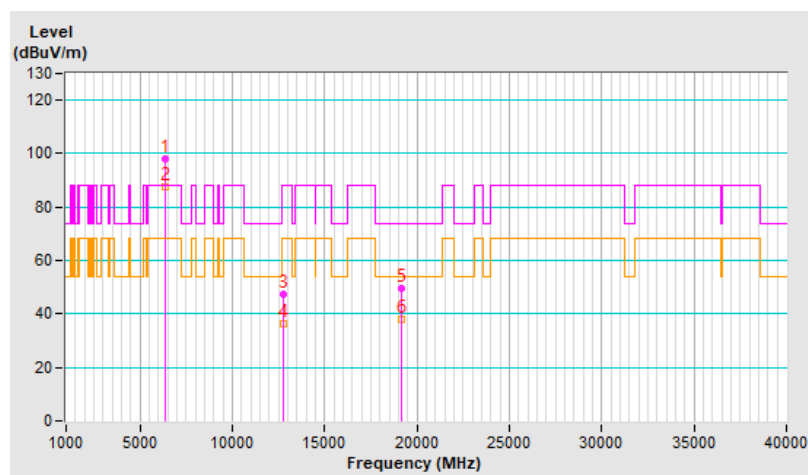


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.1 PK			1.00 V	102	103.5	6.6
2	*6385.00	98.2 AV			1.00 V	102	91.6	6.6
3	#12770.00	46.9 PK	88.2	-41.3	1.72 V	265	32.0	14.9
4	#12770.00	36.4 AV	68.2	-31.8	1.72 V	265	21.5	14.9
5	19155.00	49.0 PK	74.0	-25.0	2.65 V	160	53.7	-4.7
6	19155.00	37.9 AV	54.0	-16.1	2.65 V	160	42.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

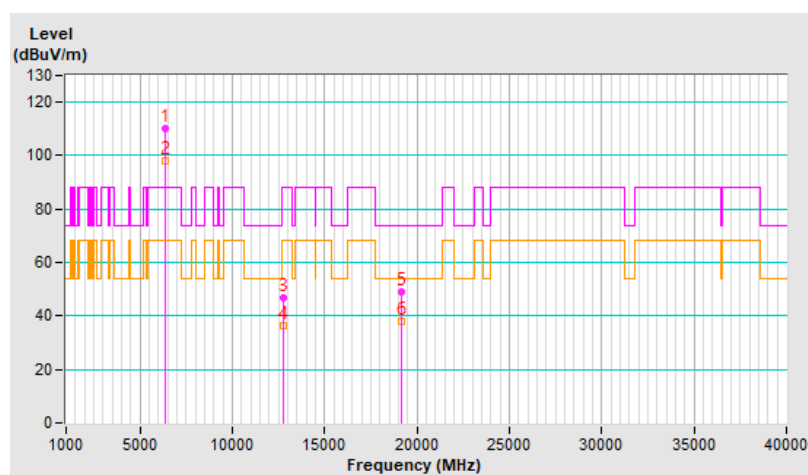


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	99.0 PK			1.06 H	223	91.2	7.8
2	*6625.00	88.5 AV			1.06 H	223	80.7	7.8
3	13250.00	47.3 PK	74.0	-26.7	1.71 H	271	31.9	15.4
4	13250.00	36.5 AV	54.0	-17.5	1.71 H	271	21.1	15.4
5	19875.00	49.7 PK	74.0	-24.3	2.64 H	164	54.2	-4.5
6	19875.00	38.3 AV	54.0	-15.7	2.64 H	164	42.8	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

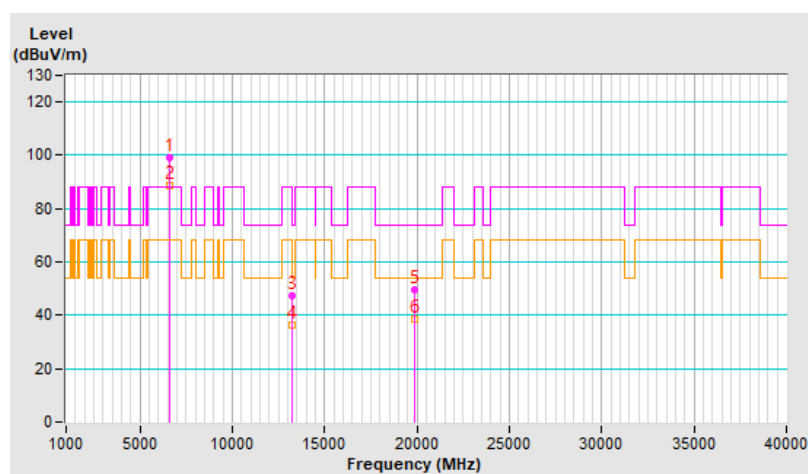


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.7 PK			1.01 V	92	101.9	7.8
2	*6625.00	97.8 AV			1.01 V	92	90.0	7.8
3	13250.00	46.8 PK	74.0	-27.2	1.78 V	256	31.4	15.4
4	13250.00	36.4 AV	54.0	-17.6	1.78 V	256	21.0	15.4
5	19875.00	49.1 PK	74.0	-24.9	2.67 V	160	53.6	-4.5
6	19875.00	37.8 AV	54.0	-16.2	2.67 V	160	42.3	-4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

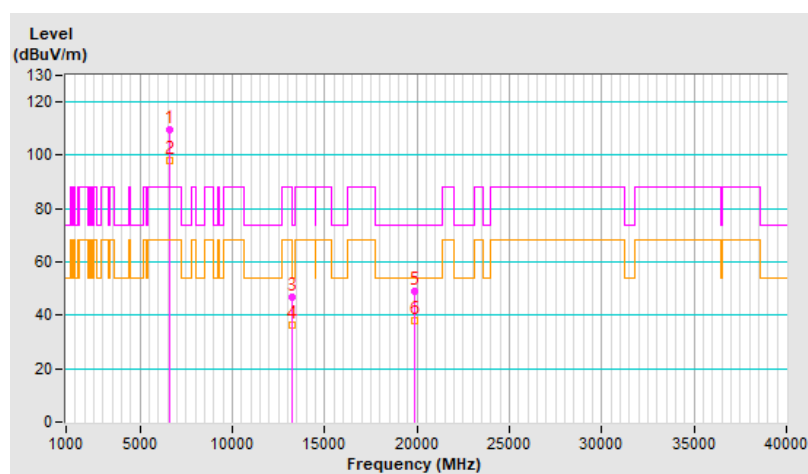


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	99.3 PK			1.07 H	224	91.6	7.7
2	*6785.00	88.7 AV			1.07 H	224	81.0	7.7
3	#13570.00	47.2 PK	88.2	-41.0	1.76 H	280	31.5	15.7
4	#13570.00	36.8 AV	68.2	-31.4	1.76 H	280	21.1	15.7
5	20355.00	49.3 PK	74.0	-24.7	2.61 H	162	53.1	-3.8
6	20355.00	37.8 AV	54.0	-16.2	2.61 H	162	41.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

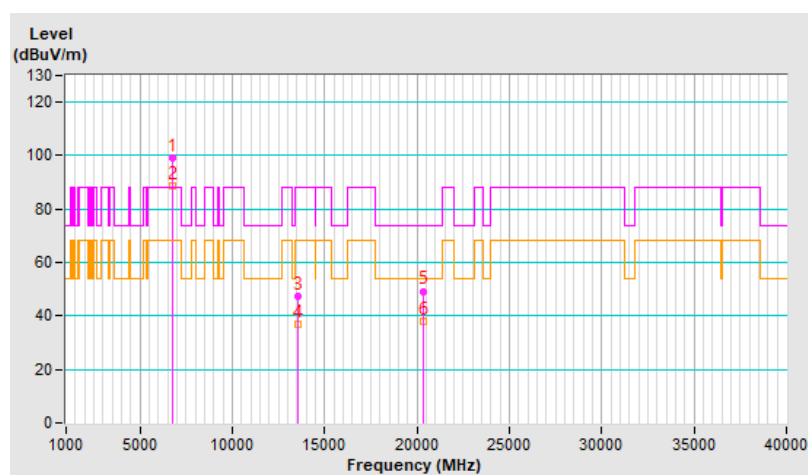


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	111.2 PK			1.81 V	277	103.5	7.7
2	*6785.00	99.9 AV			1.81 V	277	92.2	7.7
3	#13570.00	46.8 PK	88.2	-41.4	1.75 V	270	31.1	15.7
4	#13570.00	36.3 AV	68.2	-31.9	1.75 V	270	20.6	15.7
5	20355.00	49.1 PK	74.0	-24.9	2.64 V	161	52.9	-3.8
6	20355.00	37.9 AV	54.0	-16.1	2.64 V	161	41.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

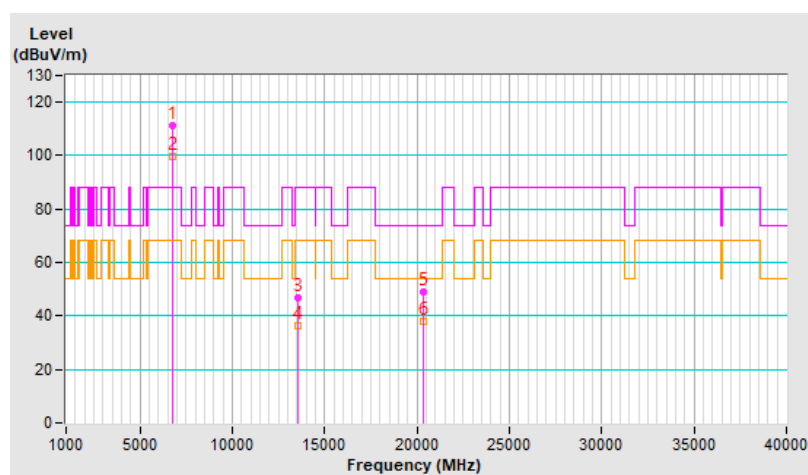


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#6020.06	55.1 PK	88.2	-33.1	1.16 H	219	49.5	5.6
2	#6020.06	41.5 AV	68.2	-26.7	1.16 H	219	35.9	5.6
3	*6025.00	93.0 PK			1.16 H	219	87.4	5.6
4	*6025.00	83.0 AV			1.16 H	219	77.4	5.6
5	12050.00	47.0 PK	74.0	-27.0	1.71 H	265	32.4	14.6
6	12050.00	36.7 AV	54.0	-17.3	1.71 H	265	22.1	14.6
7	18075.00	49.5 PK	74.0	-24.5	2.69 H	148	54.8	-5.3
8	18075.00	38.1 AV	54.0	-15.9	2.69 H	148	43.4	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

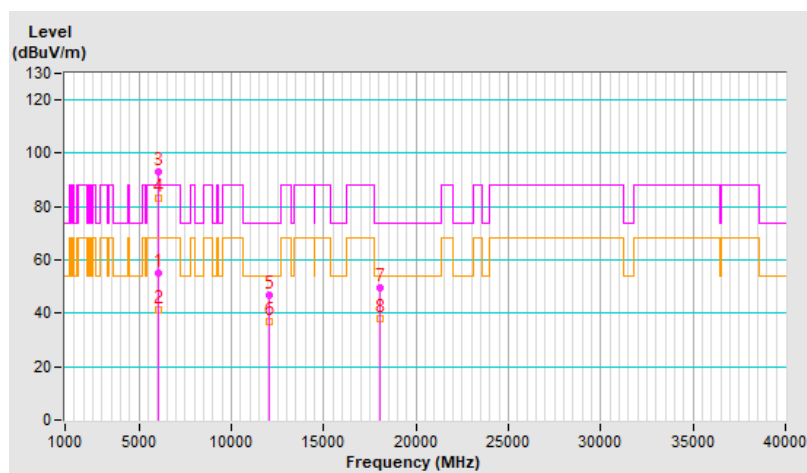


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5832.70	76.7 PK	88.2	-11.5	1.19 V	78	71.4	5.3
2	#5832.70	57.5 AV	68.2	-10.7	1.19 V	78	52.2	5.3
3	*6025.00	104.0 PK			1.19 V	78	98.4	5.6
4	*6025.00	91.6 AV			1.19 V	78	86.0	5.6
5	12050.00	47.6 PK	74.0	-26.4	1.77 V	283	33.0	14.6
6	12050.00	37.1 AV	54.0	-16.9	1.77 V	283	22.5	14.6
7	18075.00	48.8 PK	74.0	-25.2	2.70 V	171	54.1	-5.3
8	18075.00	37.8 AV	54.0	-16.2	2.70 V	171	43.1	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

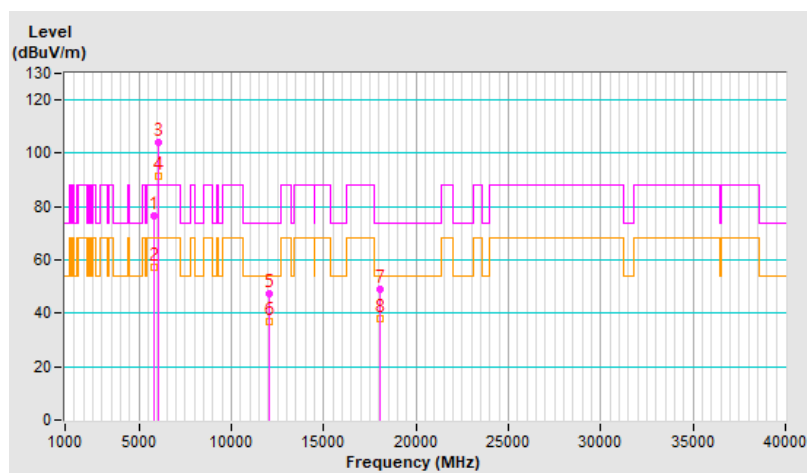


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	92.7 PK			1.22 H	219	86.3	6.4
2	*6345.00	82.8 AV			1.22 H	219	76.4	6.4
3	12690.00	47.4 PK	74.0	-26.6	1.70 H	273	32.5	14.9
4	12690.00	37.1 AV	54.0	-16.9	1.70 H	273	22.2	14.9
5	19035.00	49.8 PK	74.0	-24.2	2.67 H	150	54.7	-4.9
6	19035.00	38.4 AV	54.0	-15.6	2.67 H	150	43.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

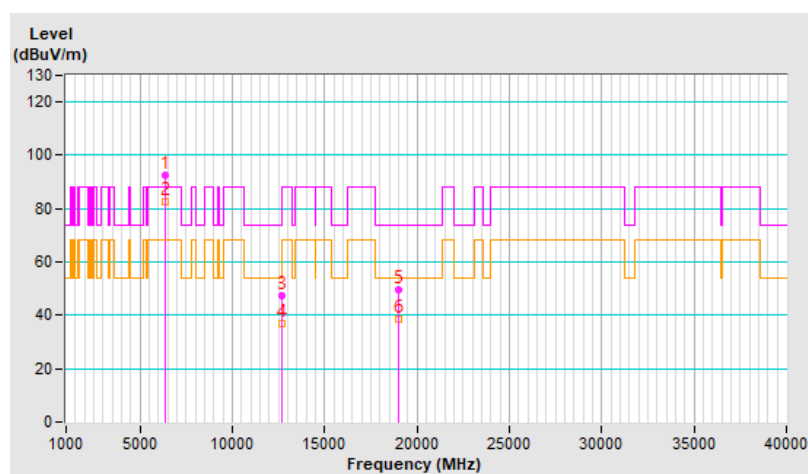


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.4 PK			1.14 V	64	98.0	6.4
2	*6345.00	92.0 AV			1.14 V	64	85.6	6.4
3	12690.00	47.3 PK	74.0	-26.7	1.76 V	256	32.4	14.9
4	12690.00	36.7 AV	54.0	-17.3	1.76 V	256	21.8	14.9
5	19035.00	49.3 PK	74.0	-24.7	2.66 V	148	54.2	-4.9
6	19035.00	38.3 AV	54.0	-15.7	2.66 V	148	43.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

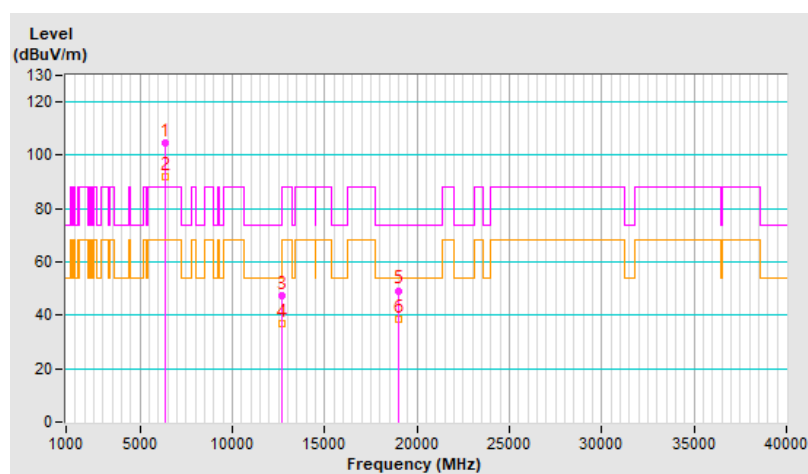


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	95.5 PK			1.26 H	227	87.7	7.8
2	*6665.00	84.5 AV			1.26 H	227	76.7	7.8
3	13330.00	46.9 PK	74.0	-27.1	1.72 H	267	31.6	15.3
4	13330.00	36.2 AV	54.0	-17.8	1.72 H	267	20.9	15.3
5	19995.00	49.5 PK	74.0	-24.5	2.70 H	150	53.9	-4.4
6	19995.00	38.2 AV	54.0	-15.8	2.70 H	150	42.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

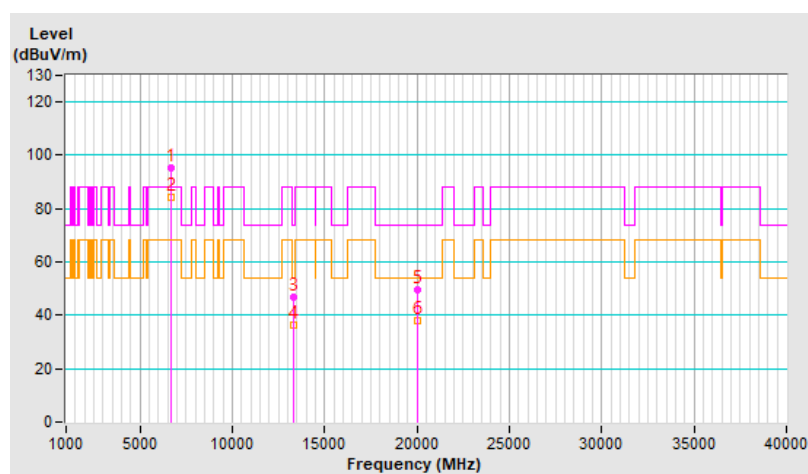


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.4 PK			1.87 V	269	97.6	7.8
2	*6665.00	93.8 AV			1.87 V	269	86.0	7.8
3	13330.00	46.6 PK	74.0	-27.4	1.76 V	268	31.3	15.3
4	13330.00	36.1 AV	54.0	-17.9	1.76 V	268	20.8	15.3
5	19995.00	49.0 PK	74.0	-25.0	2.66 V	154	53.4	-4.4
6	19995.00	38.0 AV	54.0	-16.0	2.66 V	154	42.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

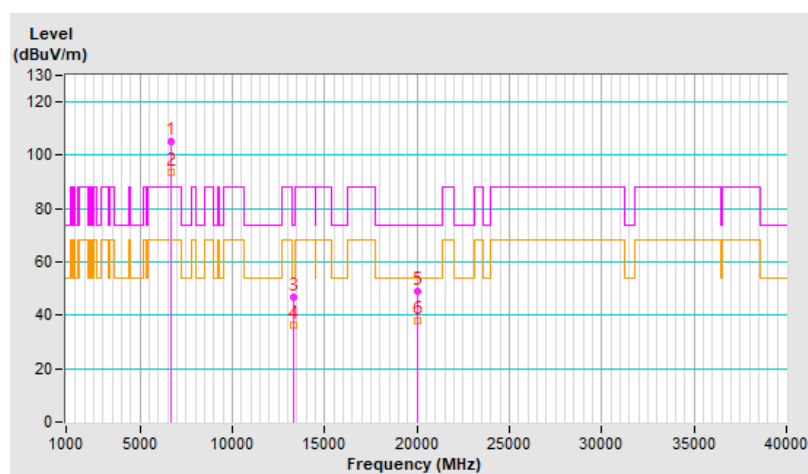


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.8 PK	88.2	-27.4	1.32 H	218	55.2	5.6
2	#5925.00	46.2 AV	68.2	-22.0	1.32 H	218	40.6	5.6
3	*6025.00	89.7 PK			1.32 H	218	84.1	5.6
4	*6025.00	79.3 AV			1.32 H	218	73.7	5.6
5	12050.00	47.6 PK	74.0	-26.4	1.70 H	255	33.0	14.6
6	12050.00	36.9 AV	54.0	-17.1	1.70 H	255	22.3	14.6
7	18075.00	49.3 PK	74.0	-24.7	2.61 H	162	54.6	-5.3
8	18075.00	38.0 AV	54.0	-16.0	2.61 H	162	43.3	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

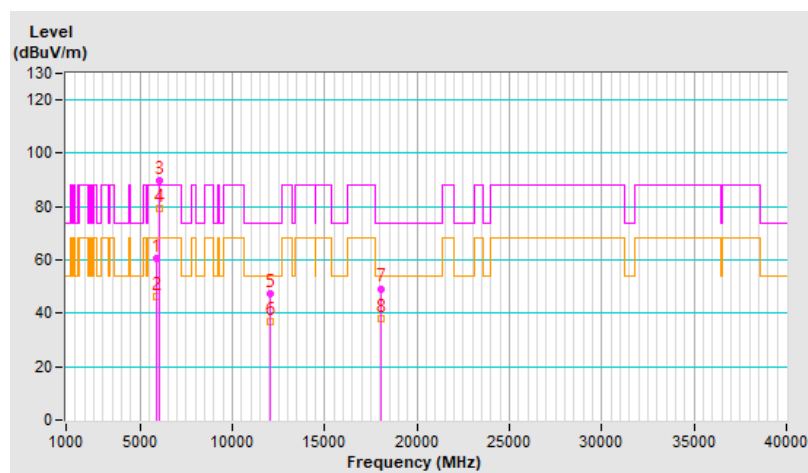


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.7 PK	88.2	-8.5	1.90 V	278	74.1	5.6
2	#5925.00	59.7 AV	68.2	-8.5	1.90 V	278	54.1	5.6
3	*6025.00	104.0 PK			1.90 V	278	98.4	5.6
4	*6025.00	92.3 AV			1.90 V	278	86.7	5.6
5	12050.00	47.0 PK	74.0	-27.0	1.78 V	274	32.4	14.6
6	12050.00	36.3 AV	54.0	-17.7	1.78 V	274	21.7	14.6
7	18075.00	49.6 PK	74.0	-24.4	2.61 V	164	54.9	-5.3
8	18075.00	38.6 AV	54.0	-15.4	2.61 V	164	43.9	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

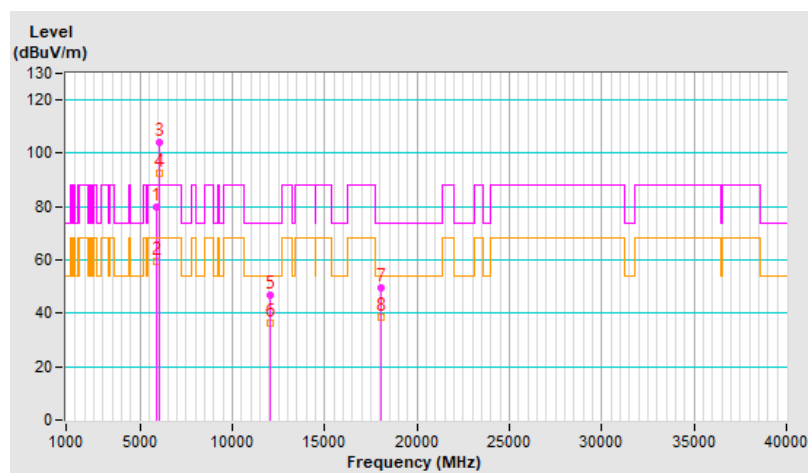


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	89.2 PK			1.28 H	218	82.8	6.4
2	*6345.00	79.0 AV			1.28 H	218	72.6	6.4
3	12690.00	47.4 PK	74.0	-26.6	1.70 H	271	32.5	14.9
4	12690.00	37.0 AV	54.0	-17.0	1.70 H	271	22.1	14.9
5	19035.00	49.1 PK	74.0	-24.9	2.65 H	165	54.0	-4.9
6	19035.00	37.9 AV	54.0	-16.1	2.65 H	165	42.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

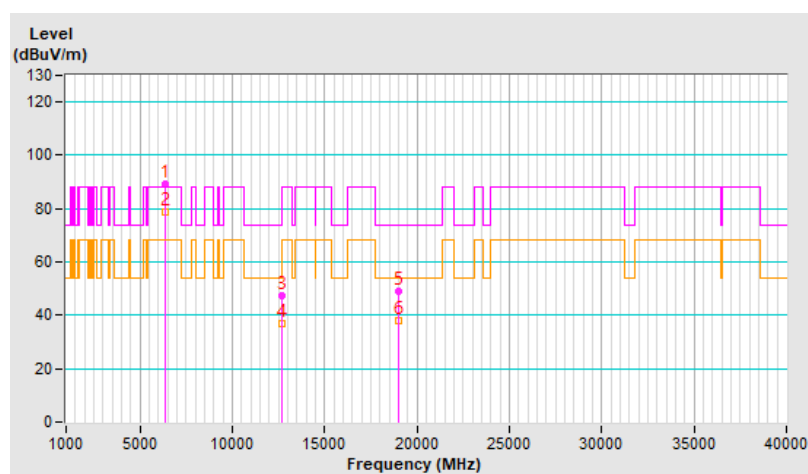


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.0 PK			1.84 V	289	97.6	6.4
2	*6345.00	92.1 AV			1.84 V	289	85.7	6.4
3	12690.00	47.3 PK	74.0	-26.7	1.78 V	272	32.4	14.9
4	12690.00	36.9 AV	54.0	-17.1	1.78 V	272	22.0	14.9
5	19035.00	49.1 PK	74.0	-24.9	2.66 V	144	54.0	-4.9
6	19035.00	38.0 AV	54.0	-16.0	2.66 V	144	42.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

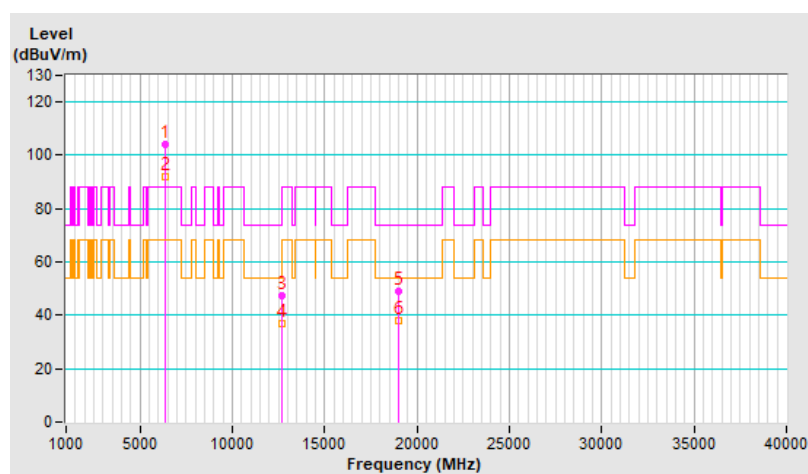


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	94.5 PK			1.11 H	228	86.7	7.8
2	*6665.00	82.0 AV			1.11 H	228	74.2	7.8
3	13330.00	47.0 PK	74.0	-27.0	1.72 H	277	31.7	15.3
4	13330.00	36.6 AV	54.0	-17.4	1.72 H	277	21.3	15.3
5	19995.00	49.1 PK	74.0	-24.9	2.67 H	163	53.5	-4.4
6	19995.00	37.9 AV	54.0	-16.1	2.67 H	163	42.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

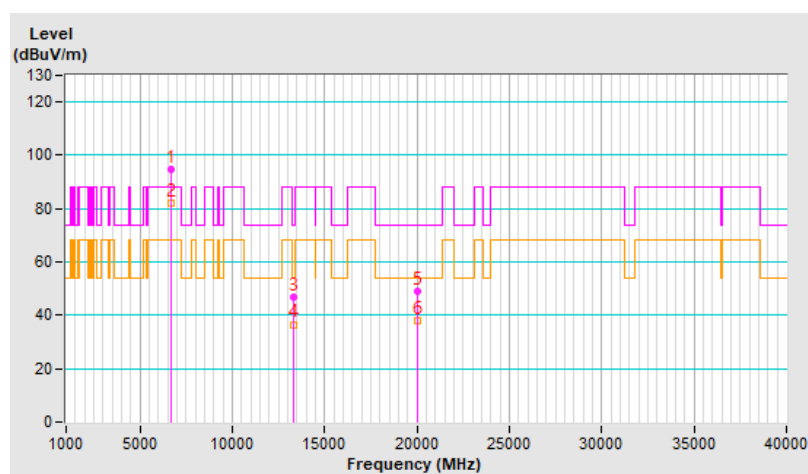


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 71 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.0 PK			1.88 V	262	97.2	7.8
2	*6665.00	93.9 AV			1.88 V	262	86.1	7.8
3	13330.00	47.7 PK	74.0	-26.3	1.73 V	260	32.4	15.3
4	13330.00	37.0 AV	54.0	-17.0	1.73 V	260	21.7	15.3
5	19995.00	49.5 PK	74.0	-24.5	2.68 V	154	53.9	-4.4
6	19995.00	38.5 AV	54.0	-15.5	2.68 V	154	42.9	-4.4

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

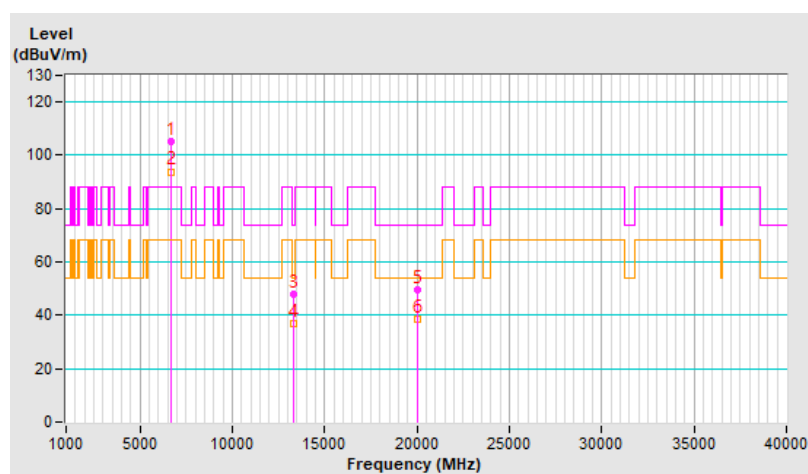


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

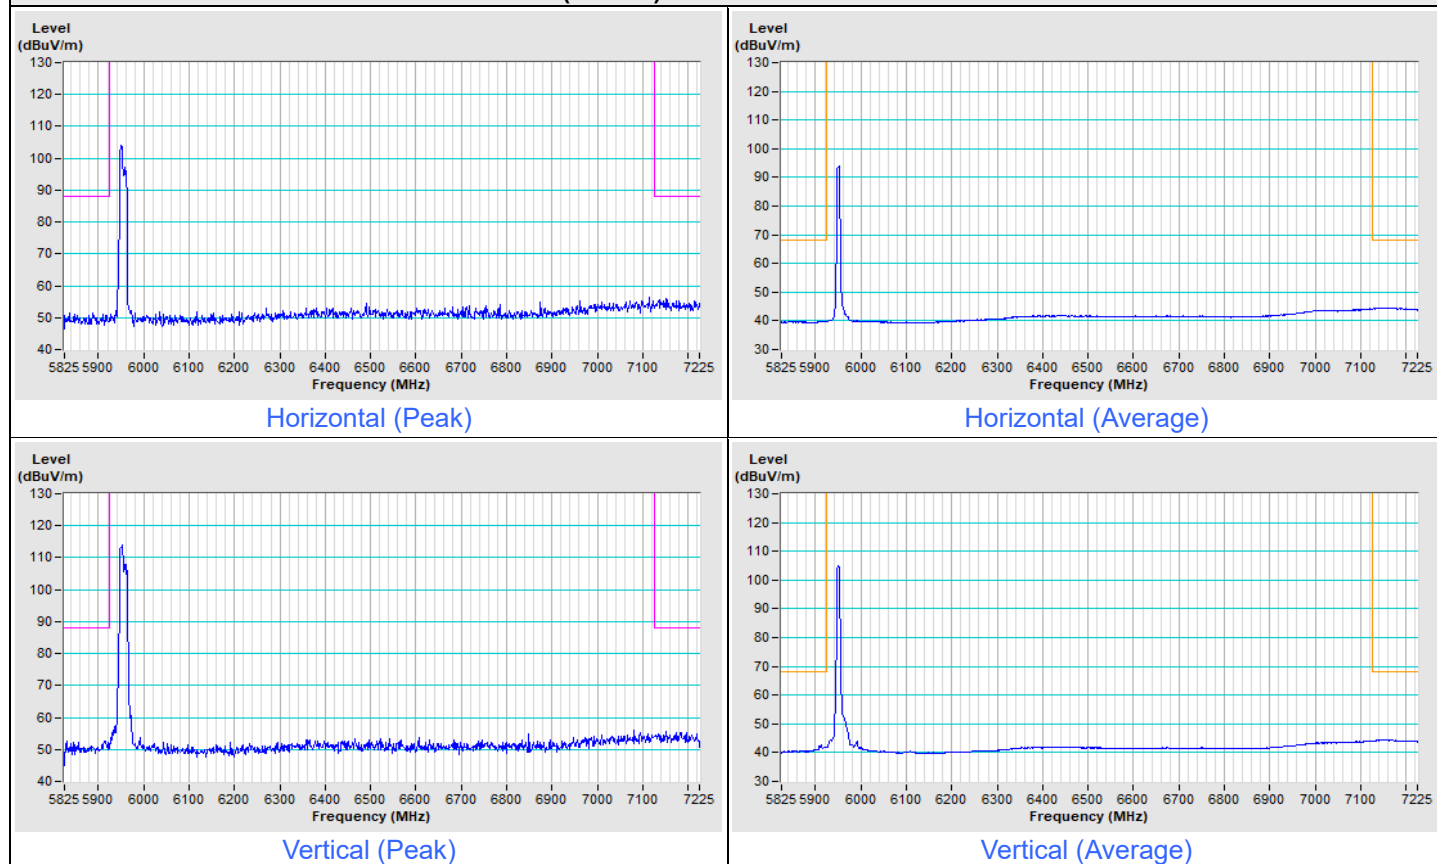


802.11be (EHT20) 52+26-tone MRU Channel 181

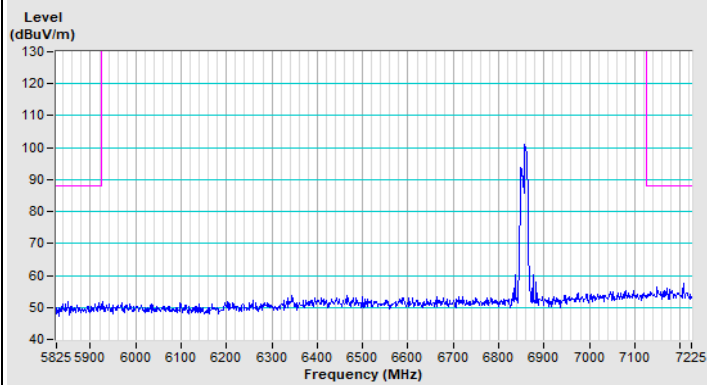


Horizontal (Peak)

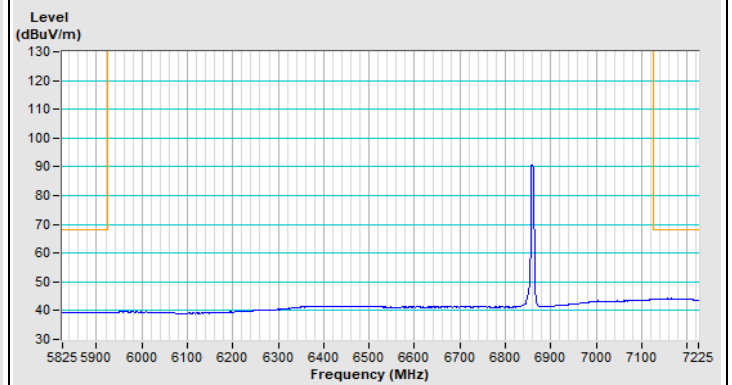

Horizontal (Average)

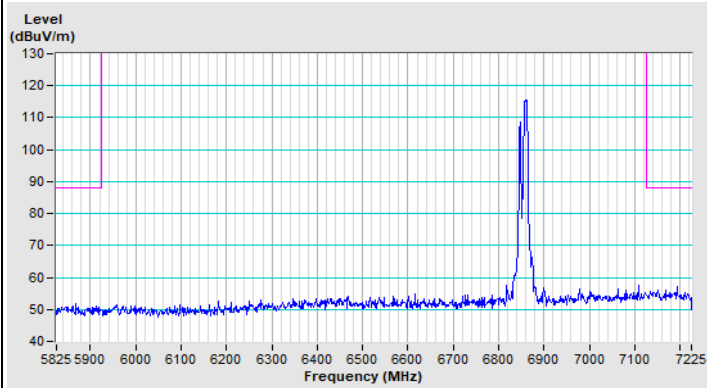


Vertical (Peak)

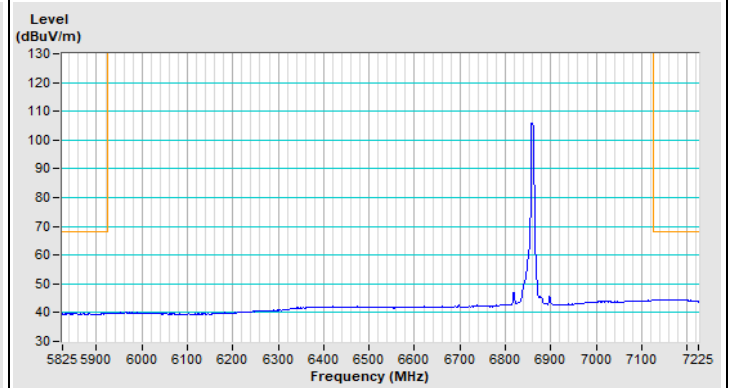


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

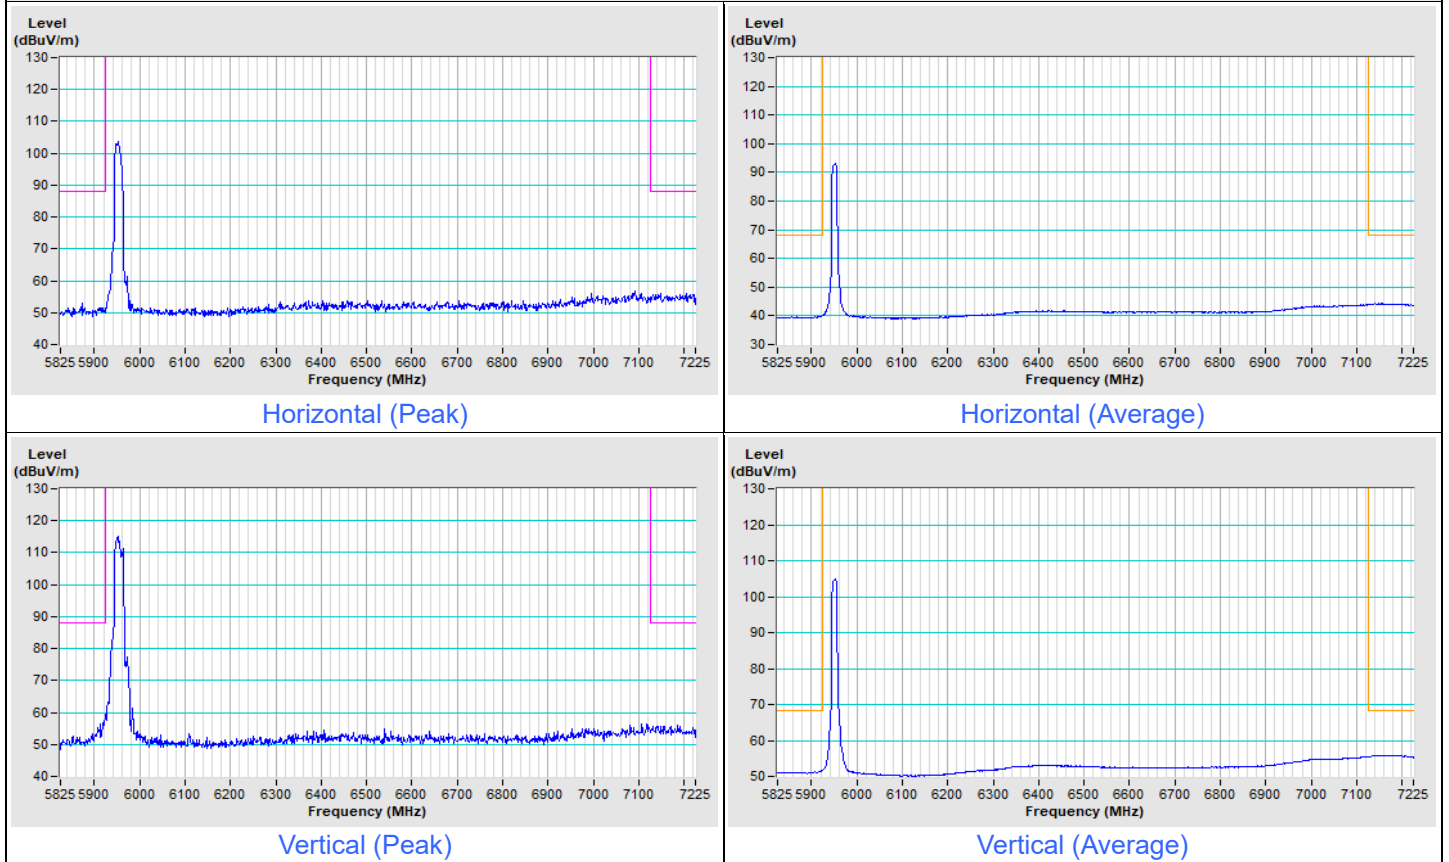


802.11be (EHT20) 106+26-tone MRU Channel 181

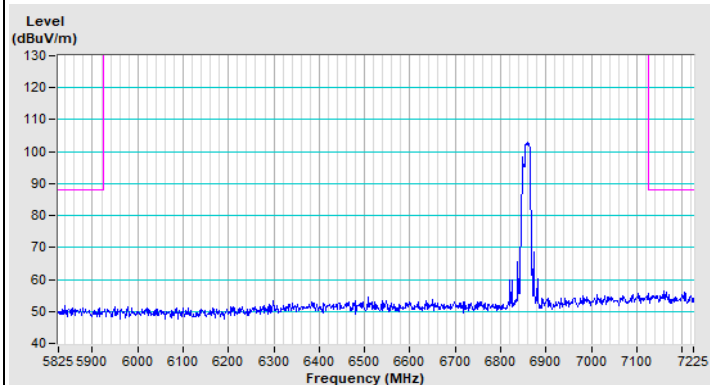


Horizontal (Peak)

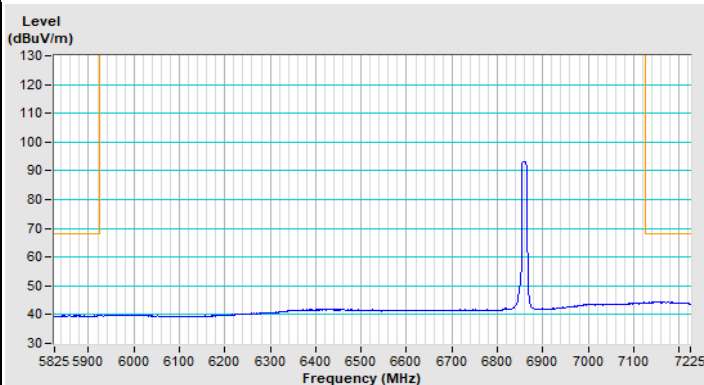

Horizontal (Average)

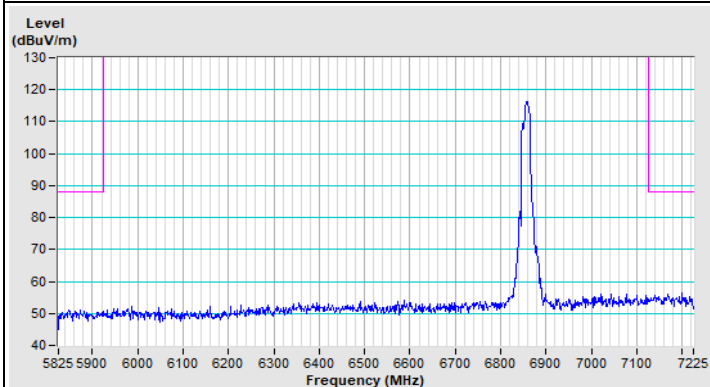


Vertical (Peak)

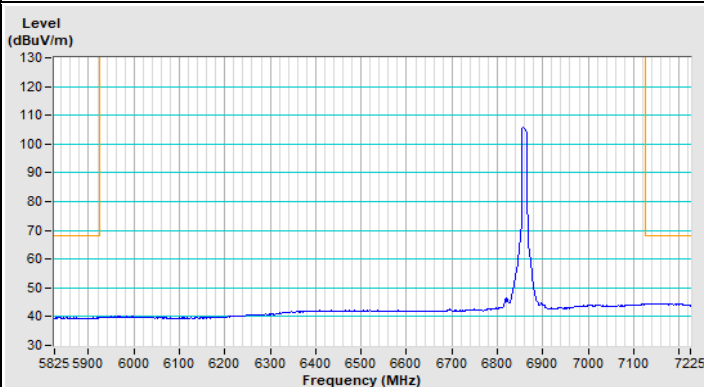


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

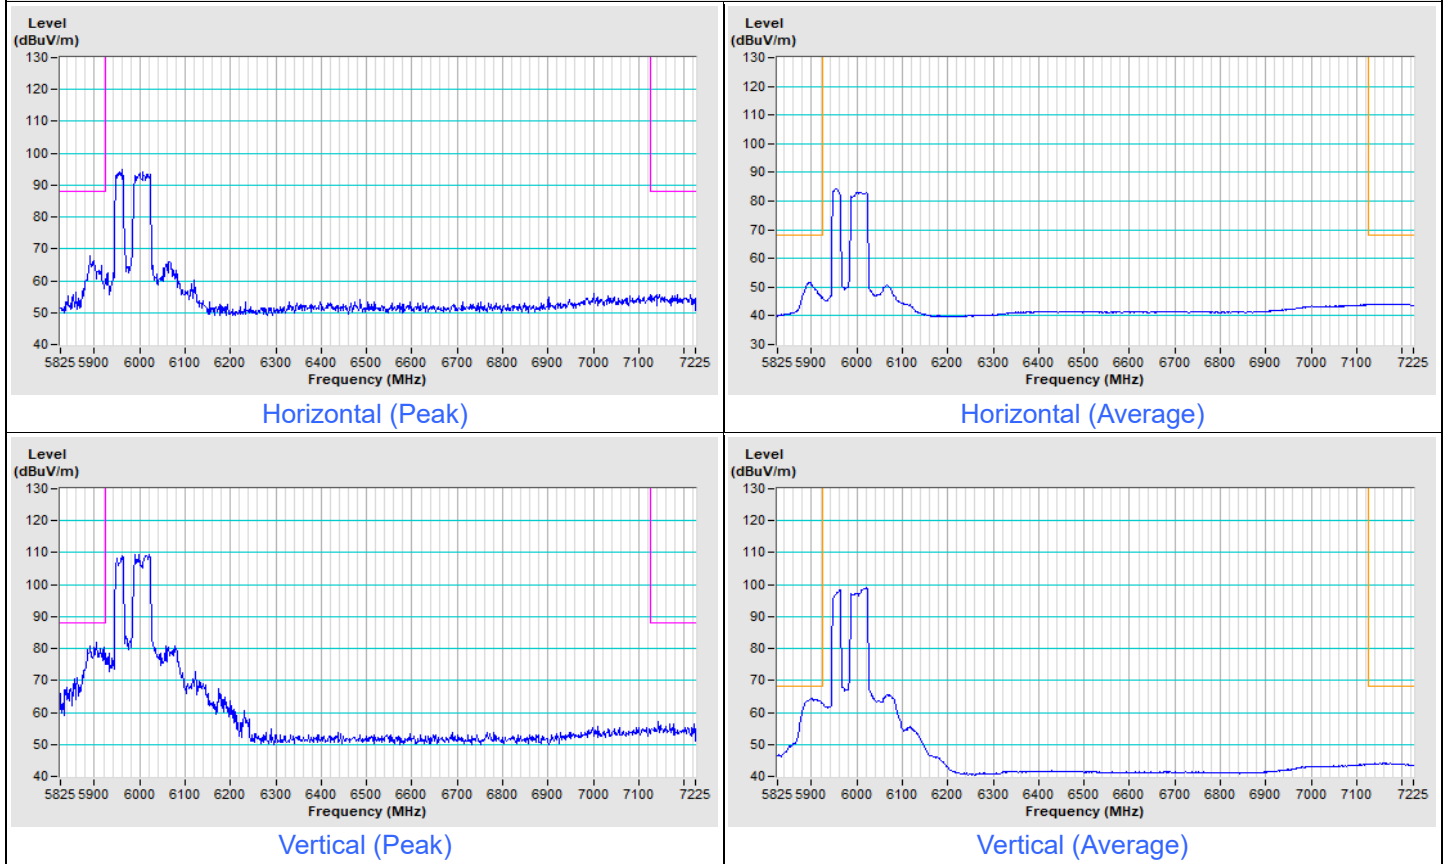


802.11be (EHT80) 484+242-tone MRU Channel 167

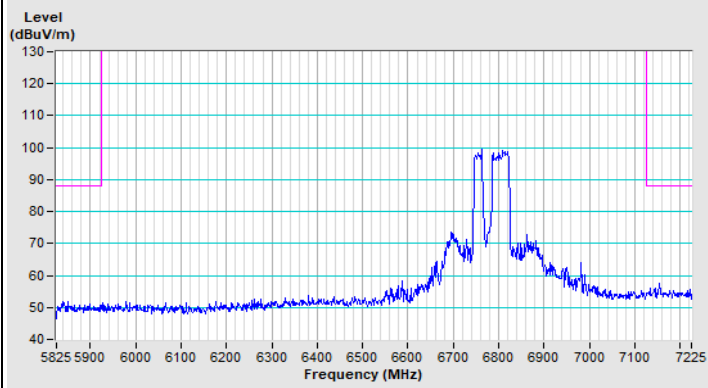


Horizontal (Peak)

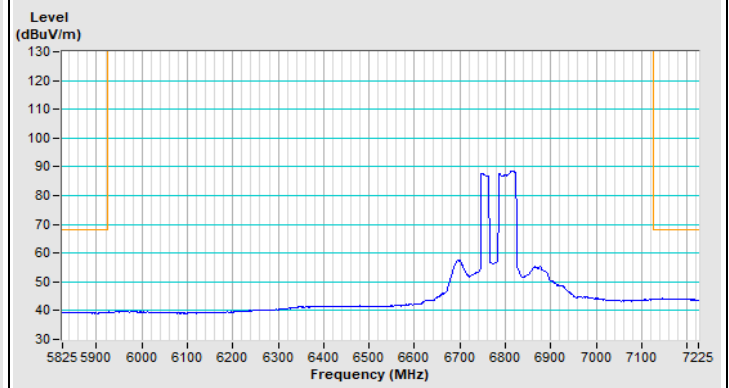

Horizontal (Average)

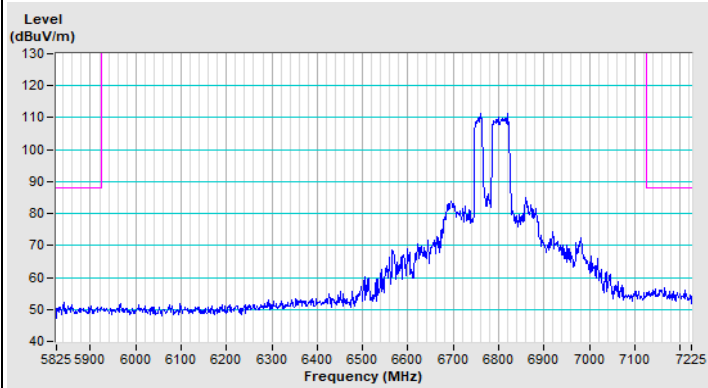


Vertical (Peak)

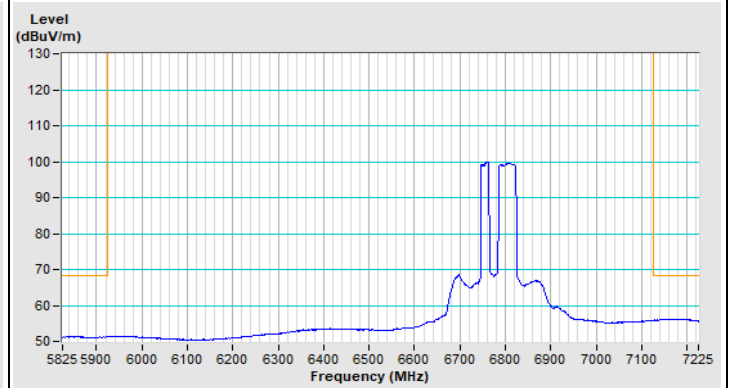


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

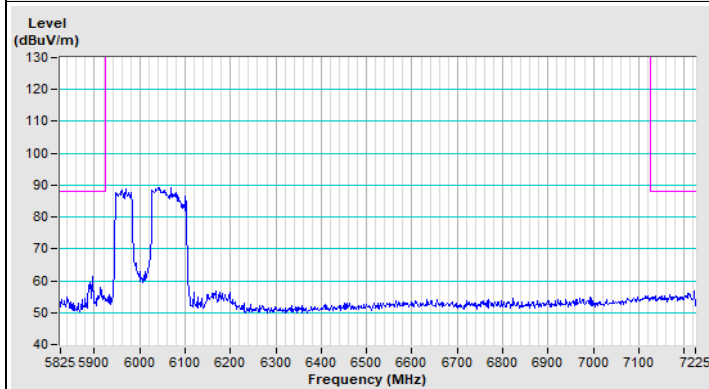


Horizontal (Peak)

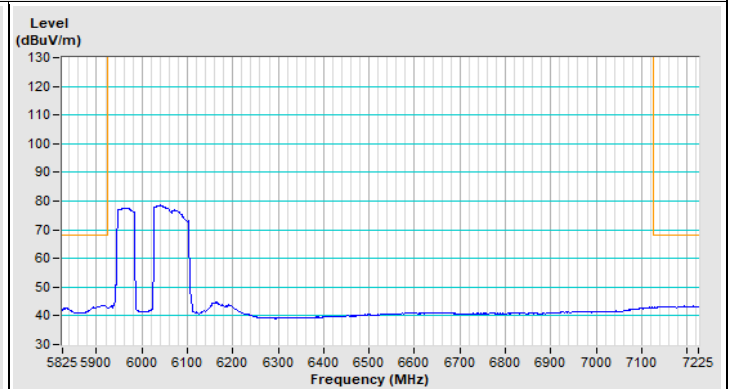

Horizontal (Average)

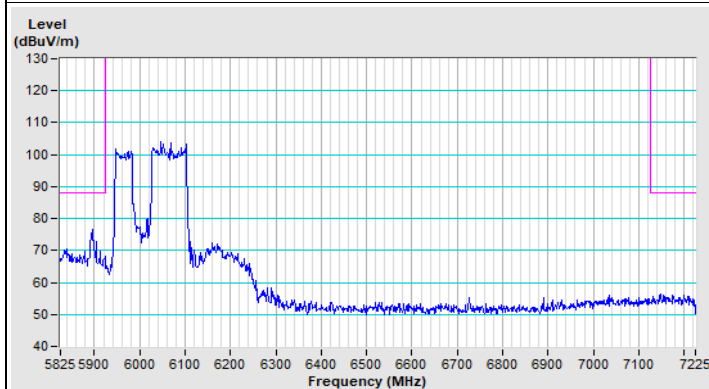


Vertical (Peak)

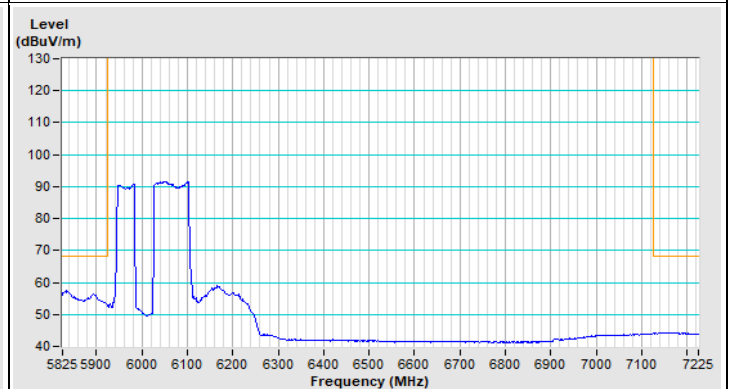


Vertical (Average)


802.11be (EHT160) 996+484-tone MRU Channel 143

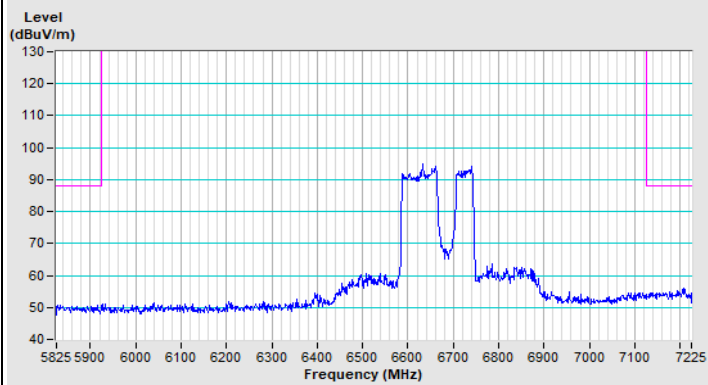


Horizontal (Peak)

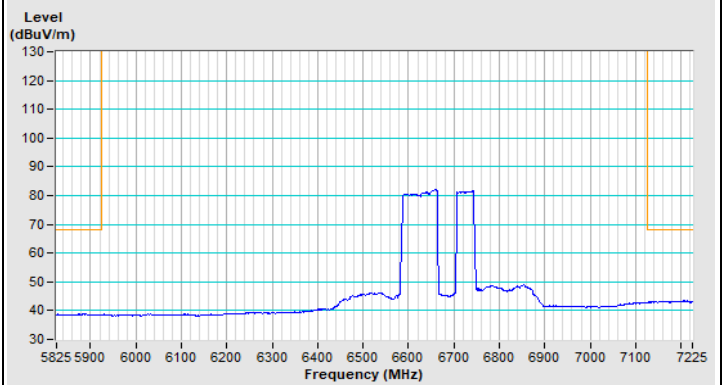

Horizontal (Average)

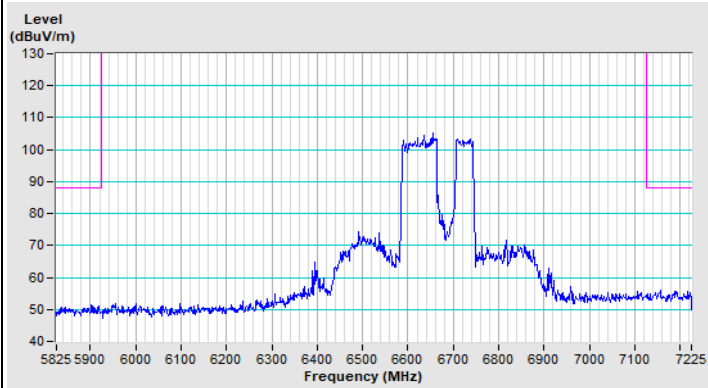


Vertical (Peak)

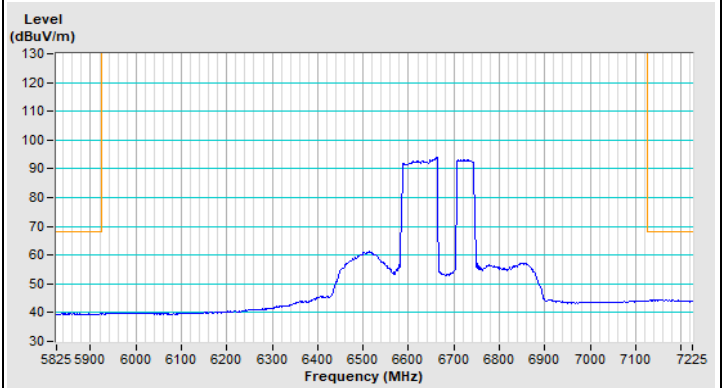


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

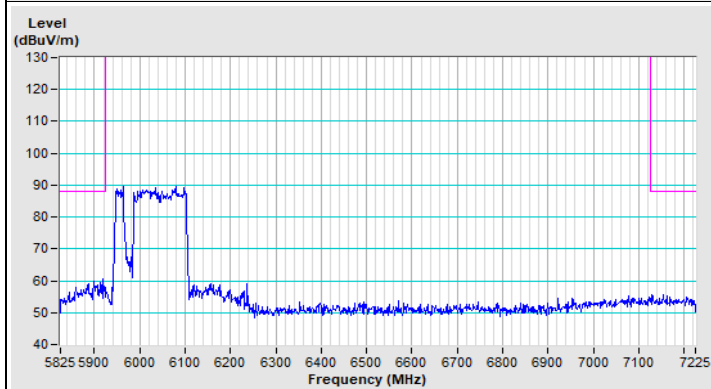


Horizontal (Peak)

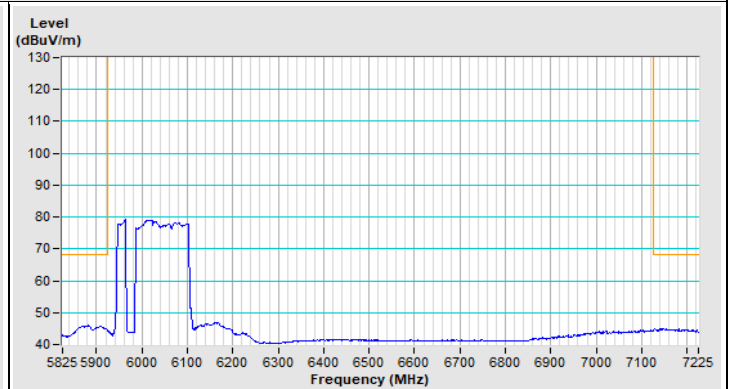

Horizontal (Average)

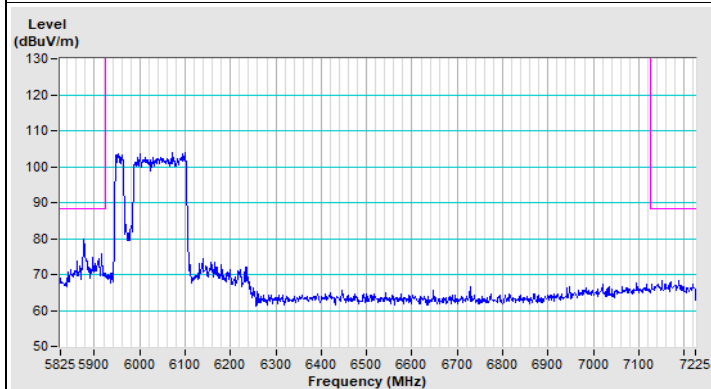


Vertical (Peak)

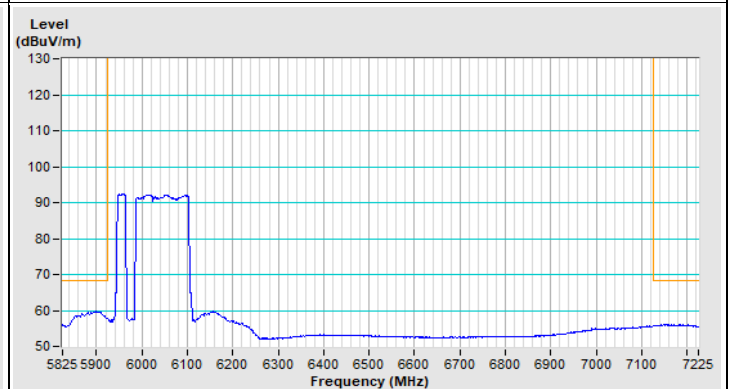


Vertical (Average)


802.11be (EHT160) 996+484+242-tone MRU Channel 143

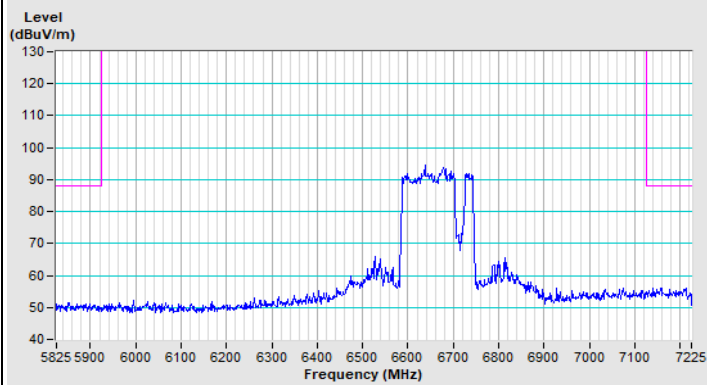


Horizontal (Peak)

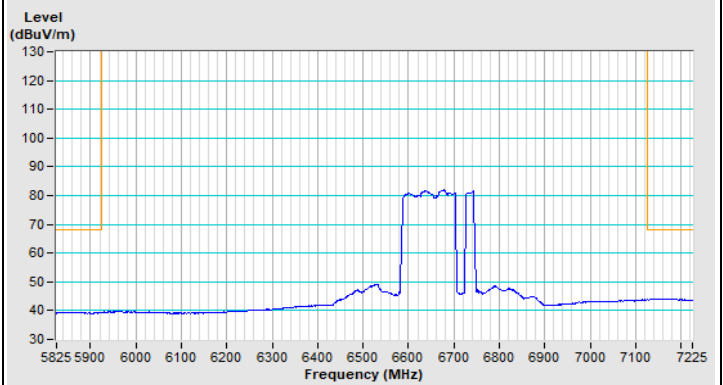

Horizontal (Average)

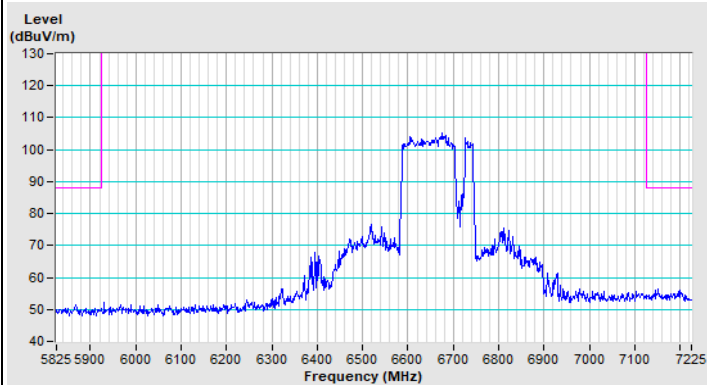

Vertical (Peak)

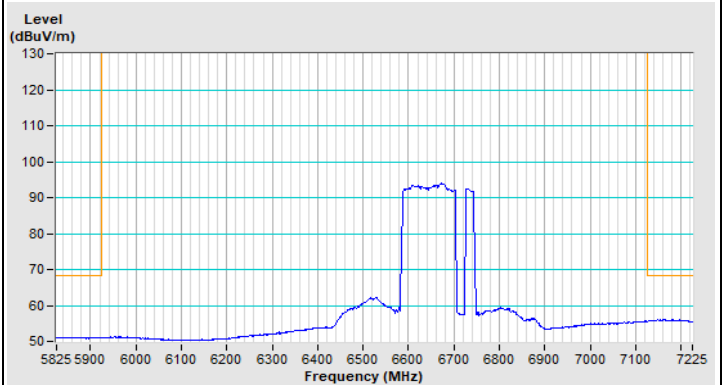

Vertical (Average)


Mode C_2TX

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	1.27 H	263	45.9	5.6
2	#5925.00	39.7 AV	68.2	-28.5	1.27 H	263	34.1	5.6
3	*5955.00	105.1 PK			1.27 H	263	99.6	5.5
4	*5955.00	94.3 AV			1.27 H	263	88.8	5.5
5	11910.00	46.7 PK	74.0	-27.3	1.77 H	124	32.1	14.6
6	11910.00	34.6 AV	54.0	-19.4	1.77 H	124	20.0	14.6
7	17865.00	57.8 PK	74.0	-16.2	1.81 H	32	31.9	25.9
8	17865.00	45.0 AV	54.0	-9.0	1.81 H	32	19.1	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

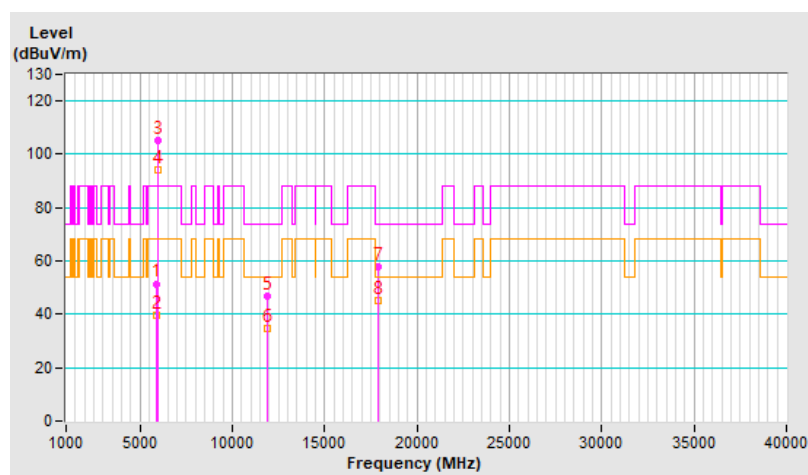


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	45.8 PK	88.2	-42.4	1.69 V	89	40.2	5.6
2	#5925.00	34.2 AV	68.2	-34.0	1.69 V	89	28.6	5.6
3	*5955.00	106.7 PK			1.69 V	89	101.2	5.5
4	*5955.00	97.4 AV			1.69 V	89	91.9	5.5
5	11910.00	45.8 PK	74.0	-28.2	1.67 V	19	31.2	14.6
6	11910.00	33.9 AV	54.0	-20.1	1.67 V	19	19.3	14.6
7	17865.00	57.8 PK	74.0	-16.2	1.73 V	32	31.9	25.9
8	17865.00	45.3 AV	54.0	-8.7	1.73 V	32	19.4	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

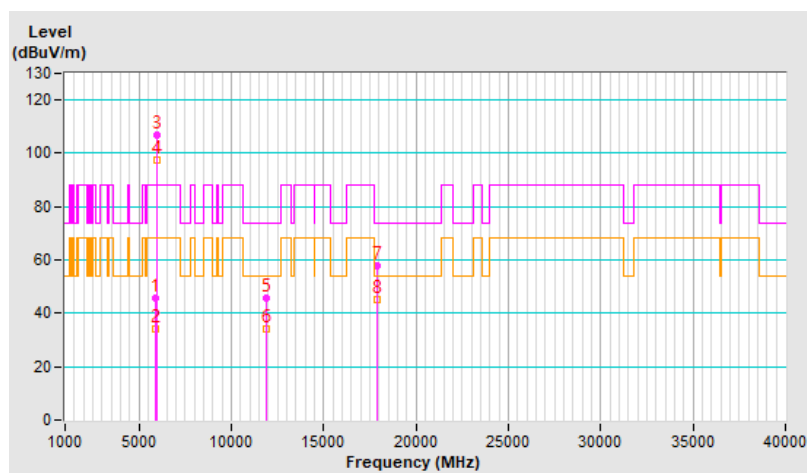


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.7 PK			1.58 H	125	99.9	6.8
2	*6415.00	93.3 AV			1.58 H	125	86.5	6.8
3	#12830.00	46.1 PK	88.2	-42.1	1.73 H	133	31.0	15.1
4	#12830.00	34.3 AV	68.2	-33.9	1.73 H	133	19.2	15.1
5	19245.00	57.7 PK	74.0	-16.3	1.79 H	27	62.3	-4.6
6	19245.00	44.9 AV	54.0	-9.1	1.79 H	27	49.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

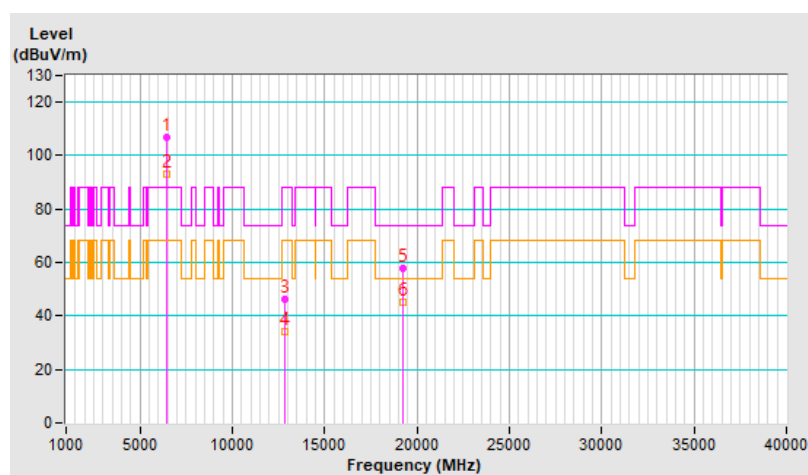


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.3 PK			1.72 V	86	100.5	6.8
2	*6415.00	97.8 AV			1.72 V	86	91.0	6.8
3	#12830.00	45.2 PK	88.2	-43.0	1.70 V	17	30.1	15.1
4	#12830.00	33.5 AV	68.2	-34.7	1.70 V	17	18.4	15.1
5	19245.00	57.5 PK	74.0	-16.5	1.71 V	22	62.1	-4.6
6	19245.00	44.9 AV	54.0	-9.1	1.71 V	22	49.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

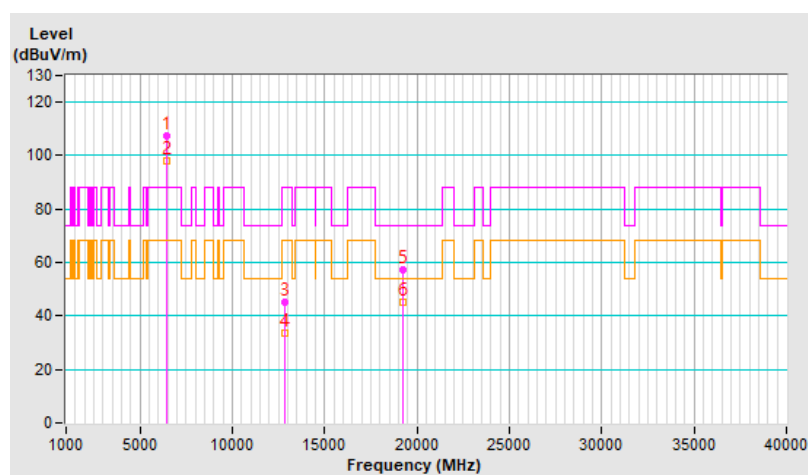


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.8 PK			1.64 H	133	99.4	7.4
2	*6535.00	93.5 AV			1.64 H	133	86.1	7.4
3	#13070.00	46.4 PK	88.2	-41.8	1.78 H	135	31.3	15.1
4	#13070.00	34.6 AV	68.2	-33.6	1.78 H	135	19.5	15.1
5	19605.00	57.5 PK	74.0	-16.5	1.79 H	45	62.3	-4.8
6	19605.00	44.9 AV	54.0	-9.1	1.79 H	45	49.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

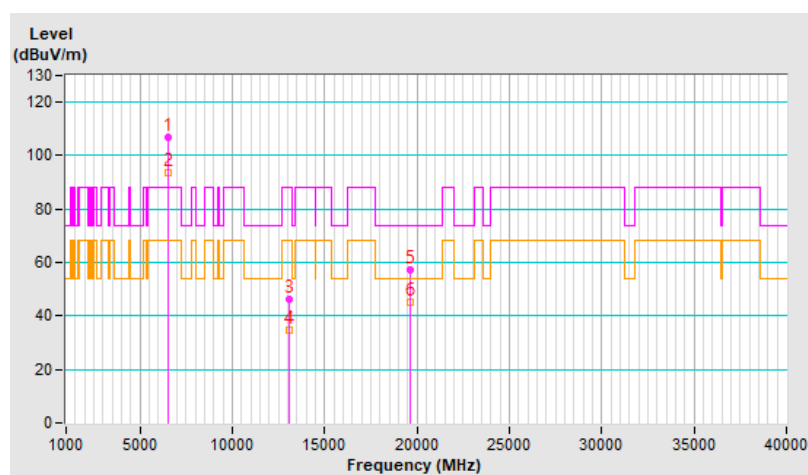


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.1 PK			1.74 V	97	98.7	7.4
2	*6535.00	97.1 AV			1.74 V	97	89.7	7.4
3	#13070.00	45.6 PK	88.2	-42.6	1.61 V	35	30.5	15.1
4	#13070.00	33.6 AV	68.2	-34.6	1.61 V	35	18.5	15.1
5	19605.00	58.1 PK	74.0	-15.9	1.78 V	25	62.9	-4.8
6	19605.00	45.4 AV	54.0	-8.6	1.78 V	25	50.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

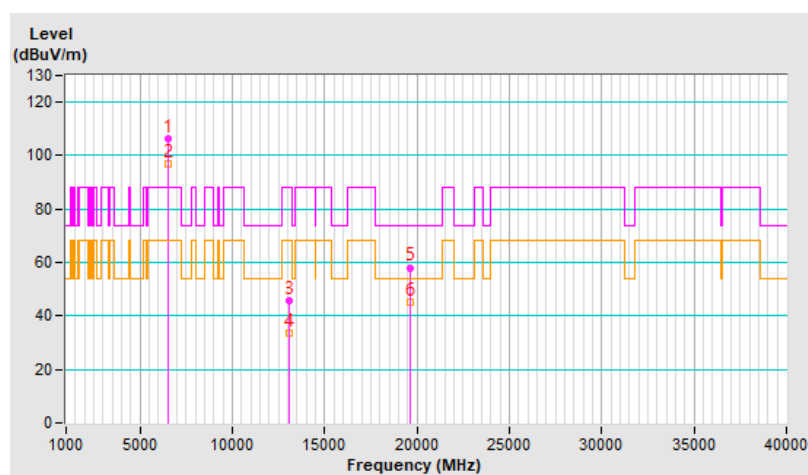


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.6 PK			1.62 H	131	98.4	8.2
2	*6855.00	93.4 AV			1.62 H	131	85.2	8.2
3	#13710.00	47.1 PK	88.2	-41.1	1.82 H	116	30.8	16.3
4	#13710.00	35.1 AV	68.2	-33.1	1.82 H	116	18.8	16.3
5	20565.00	58.0 PK	74.0	-16.0	1.84 H	28	61.7	-3.7
6	20565.00	45.2 AV	54.0	-8.8	1.84 H	28	48.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

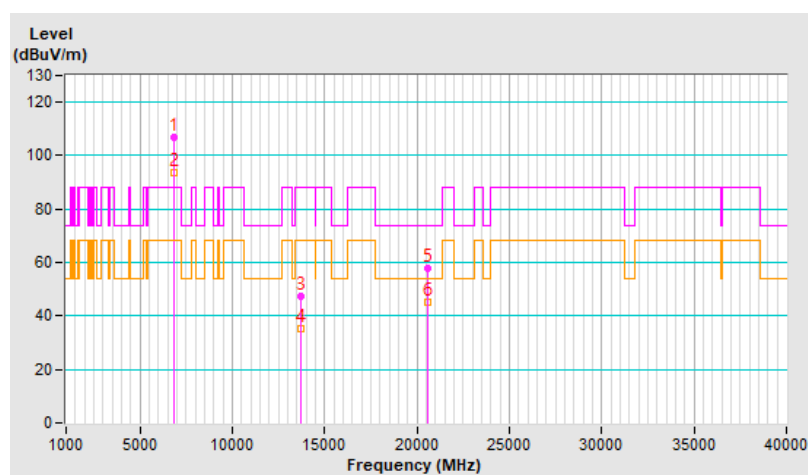


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.7 PK			1.74 V	82	99.5	8.2
2	*6855.00	97.6 AV			1.74 V	82	89.4	8.2
3	#13710.00	44.2 PK	88.2	-44.0	1.64 V	8	27.9	16.3
4	#13710.00	32.6 AV	68.2	-35.6	1.64 V	8	16.3	16.3
5	20565.00	57.9 PK	74.0	-16.1	1.72 V	41	61.6	-3.7
6	20565.00	45.5 AV	54.0	-8.5	1.72 V	41	49.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

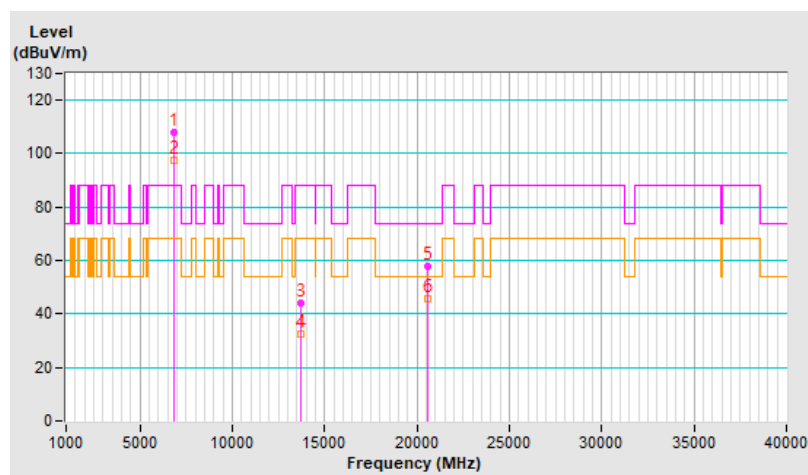


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.1 PK	88.2	-33.1	1.28 H	262	49.5	5.6
2	#5925.00	40.5 AV	68.2	-27.7	1.28 H	262	34.9	5.6
3	*5955.00	105.0 PK			1.28 H	262	99.5	5.5
4	*5955.00	95.7 AV			1.28 H	262	90.2	5.5
5	11910.00	46.4 PK	74.0	-27.6	1.82 H	110	31.8	14.6
6	11910.00	34.2 AV	54.0	-19.8	1.82 H	110	19.6	14.6
7	17865.00	58.2 PK	74.0	-15.8	1.78 H	27	32.3	25.9
8	17865.00	45.3 AV	54.0	-8.7	1.78 H	27	19.4	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

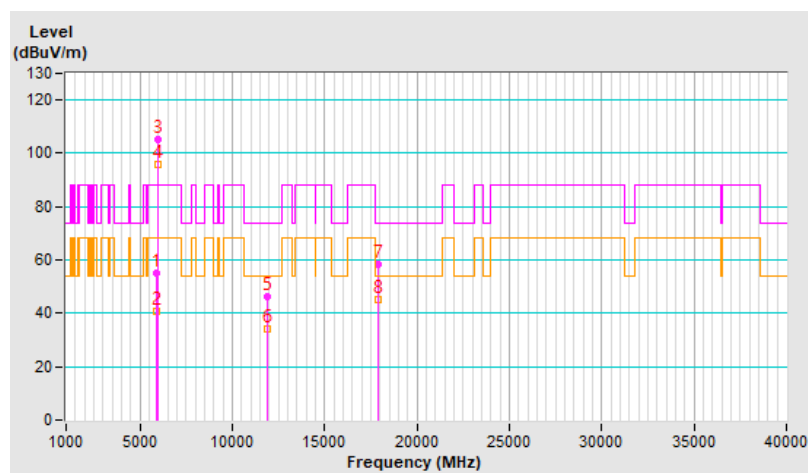


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.9 PK	88.2	-36.3	1.70 V	91	46.3	5.6
2	#5925.00	39.3 AV	68.2	-28.9	1.70 V	91	33.7	5.6
3	*5955.00	107.3 PK			1.70 V	91	101.8	5.5
4	*5955.00	97.1 AV			1.70 V	91	91.6	5.5
5	11910.00	45.3 PK	74.0	-28.7	1.72 V	13	30.7	14.6
6	11910.00	33.5 AV	54.0	-20.5	1.72 V	13	18.9	14.6
7	17865.00	58.3 PK	74.0	-15.7	1.72 V	37	32.4	25.9
8	17865.00	45.7 AV	54.0	-8.3	1.72 V	37	19.8	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

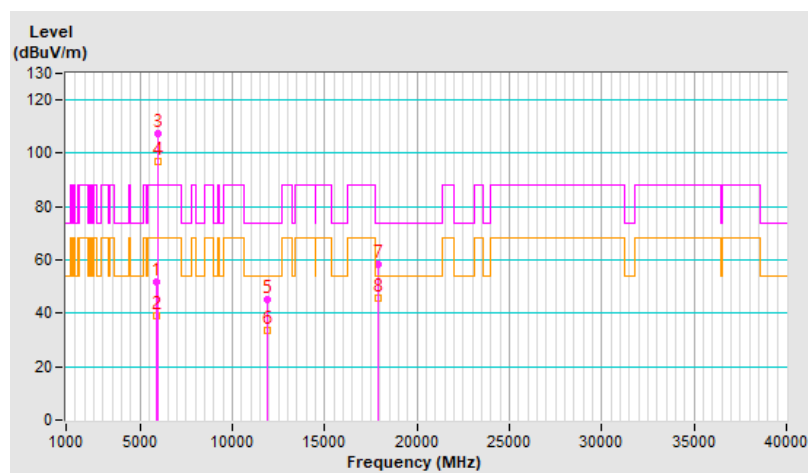


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	101.4 PK			1.47 H	135	94.6	6.8
2	*6415.00	91.5 AV			1.47 H	135	84.7	6.8
3	#12830.00	46.8 PK	88.2	-41.4	1.79 H	134	31.7	15.1
4	#12830.00	34.5 AV	68.2	-33.7	1.79 H	134	19.4	15.1
5	19245.00	58.1 PK	74.0	-15.9	1.85 H	42	62.7	-4.6
6	19245.00	45.0 AV	54.0	-9.0	1.85 H	42	49.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

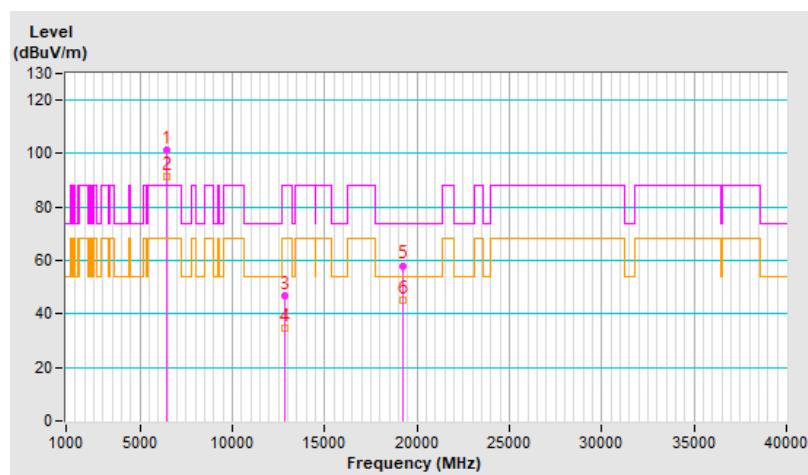

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.8 PK			1.77 V	252	102.0	6.8
2	*6415.00	98.2 AV			1.77 V	252	91.4	6.8
3	#12830.00	46.0 PK	88.2	-42.2	1.72 V	26	30.9	15.1
4	#12830.00	34.0 AV	68.2	-34.2	1.72 V	26	18.9	15.1
5	19245.00	58.1 PK	74.0	-15.9	1.70 V	28	62.7	-4.6
6	19245.00	45.5 AV	54.0	-8.5	1.70 V	28	50.1	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

