



For Integration method:

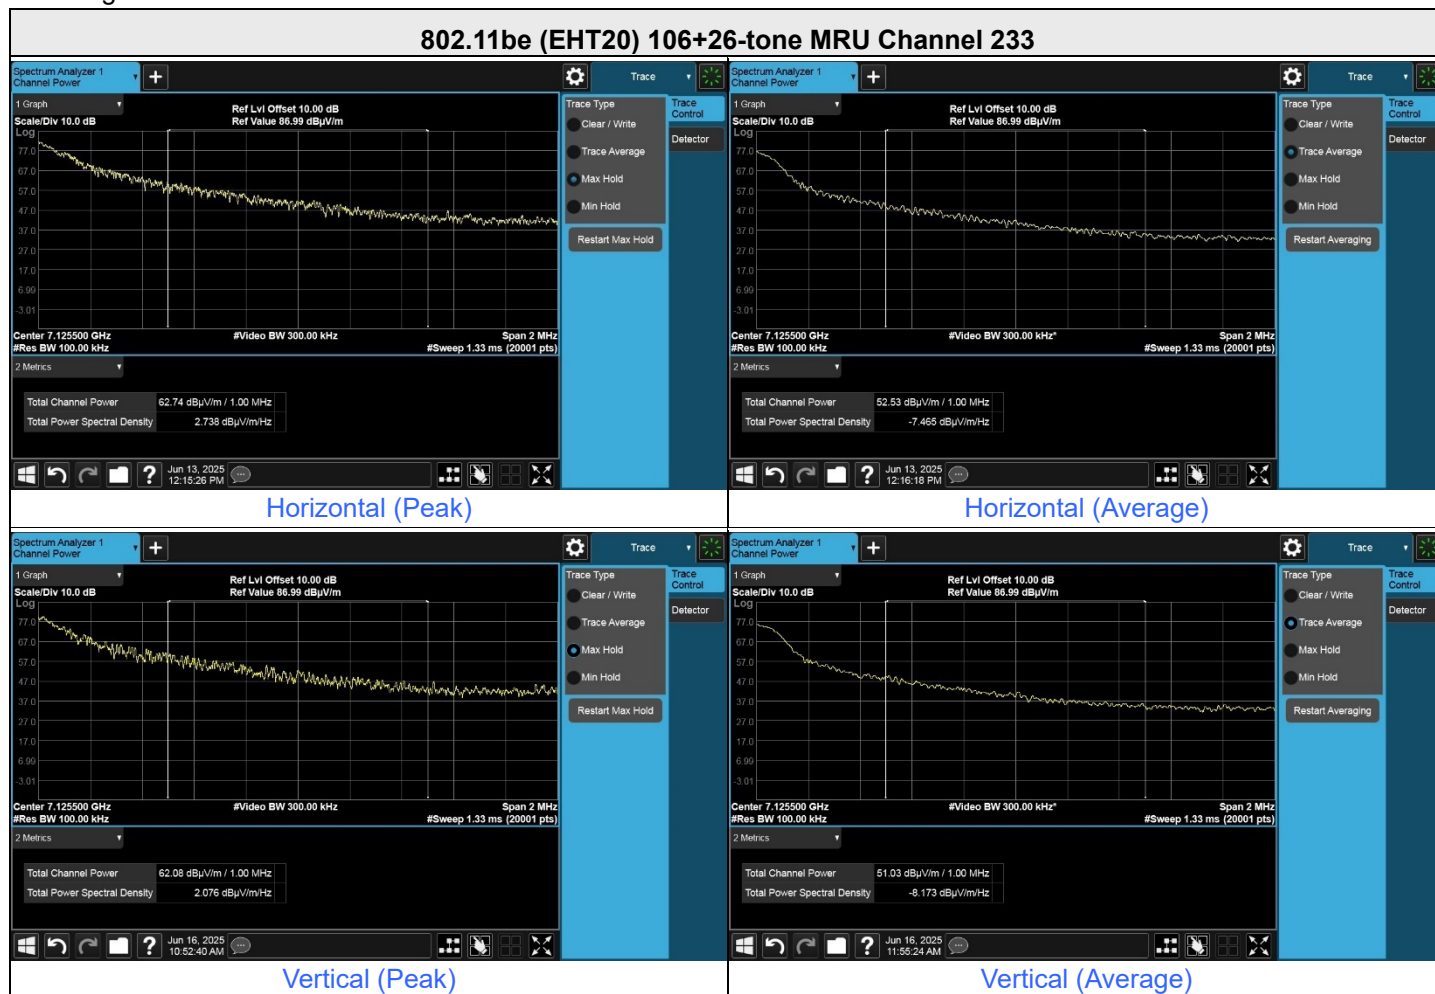


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT80) 484+242-tone MRU Channel 215

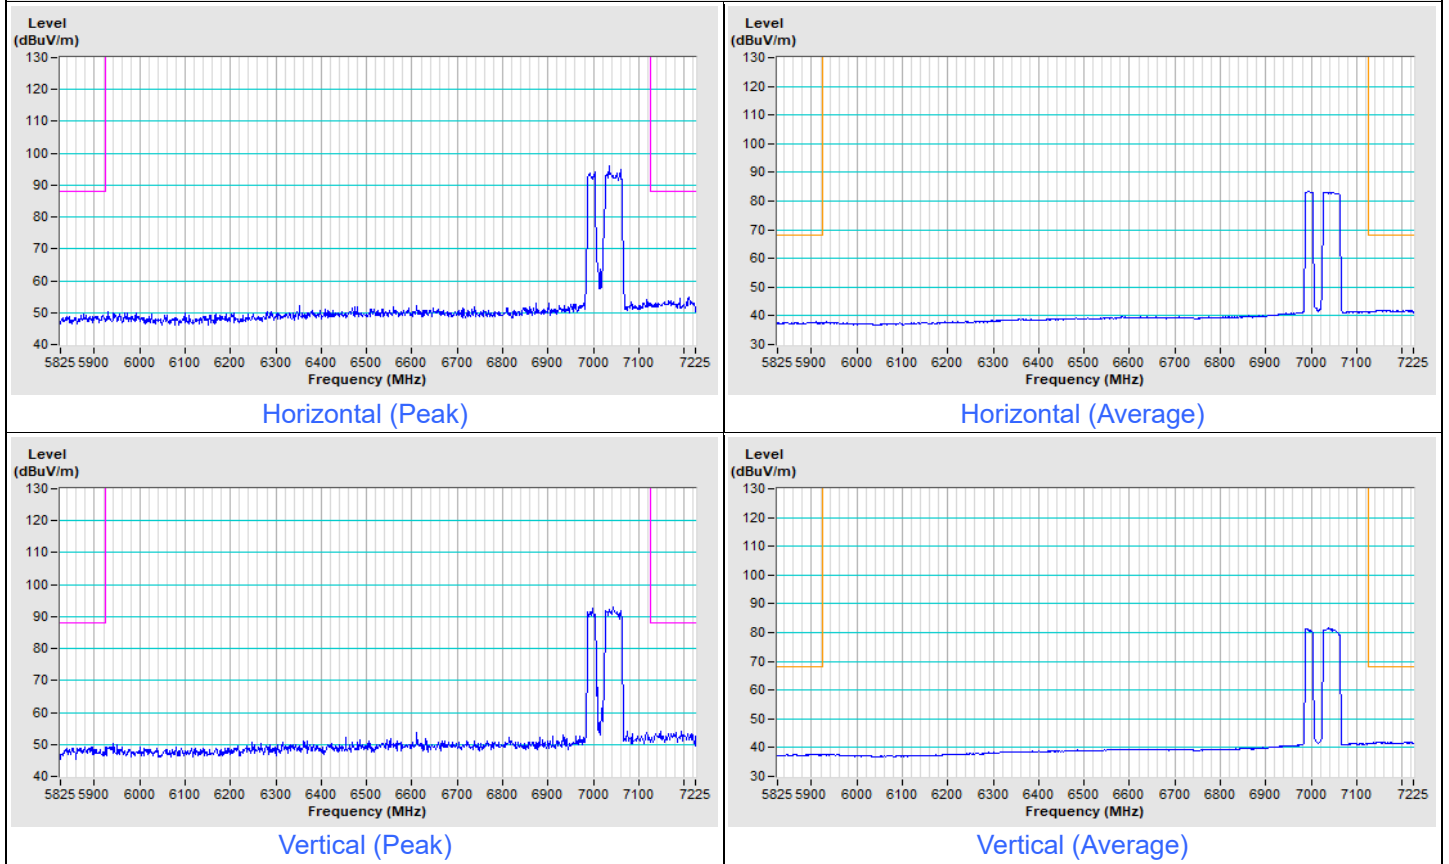


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 207

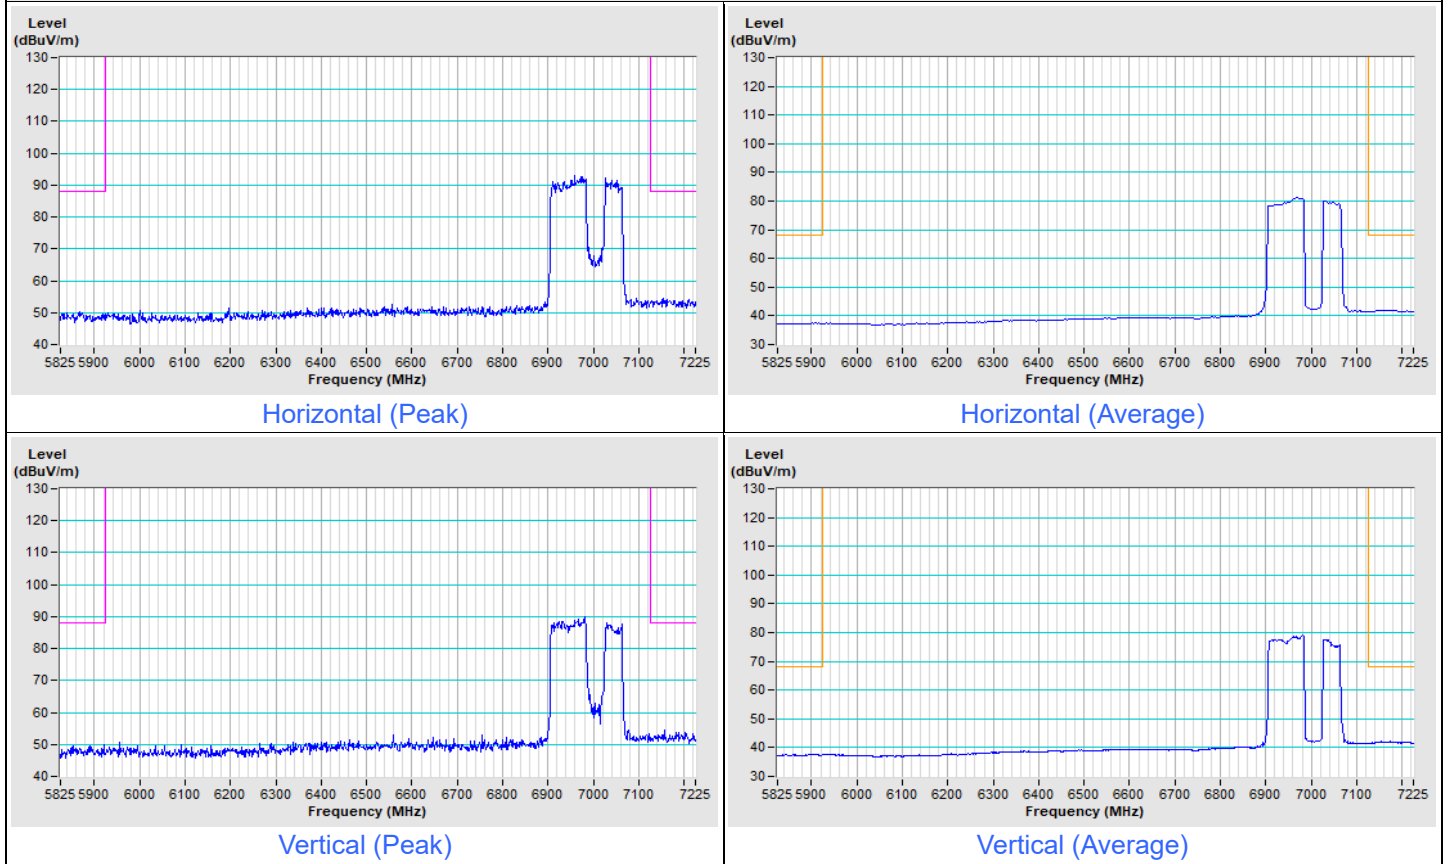


802.11be (EHT160) 996+484+242-tone MRU Channel 207

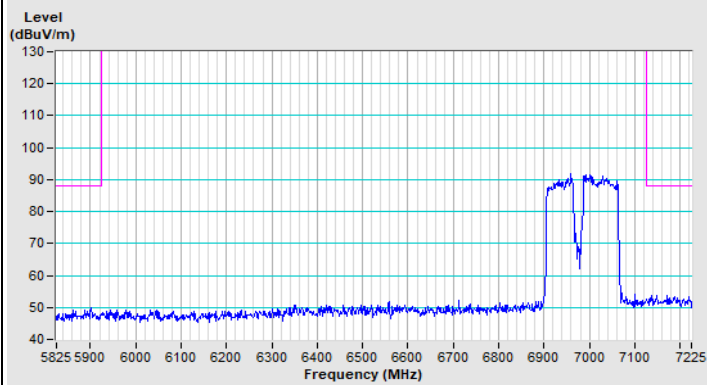


Horizontal (Peak)

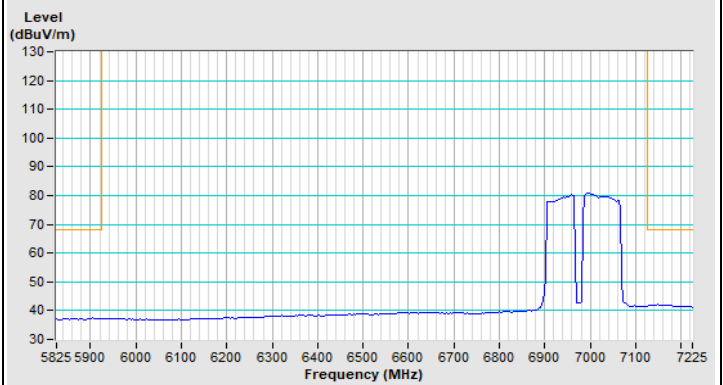

Horizontal (Average)

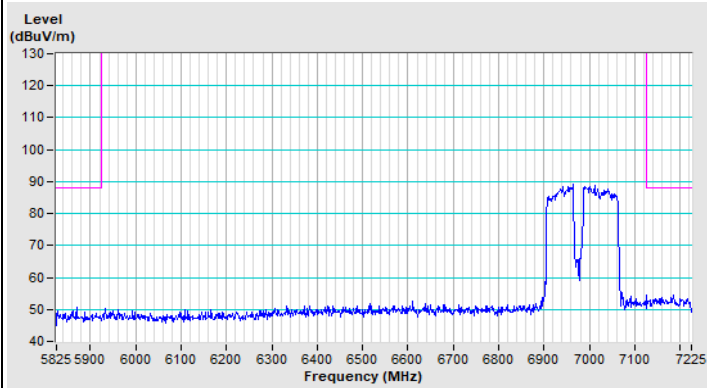

Vertical (Peak)

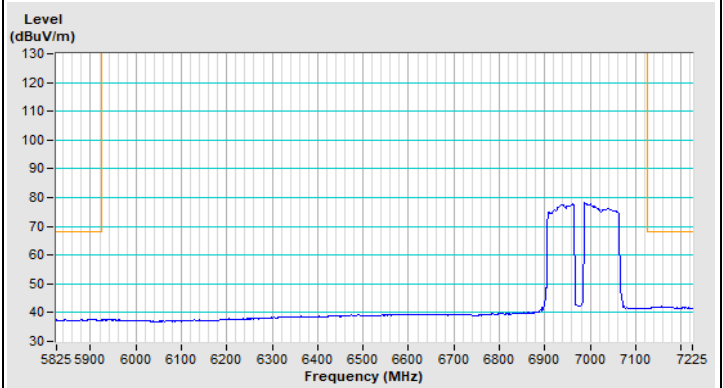


Vertical (Average)

Plot of Band Edge

Mode A_2TX

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11a Channel 233

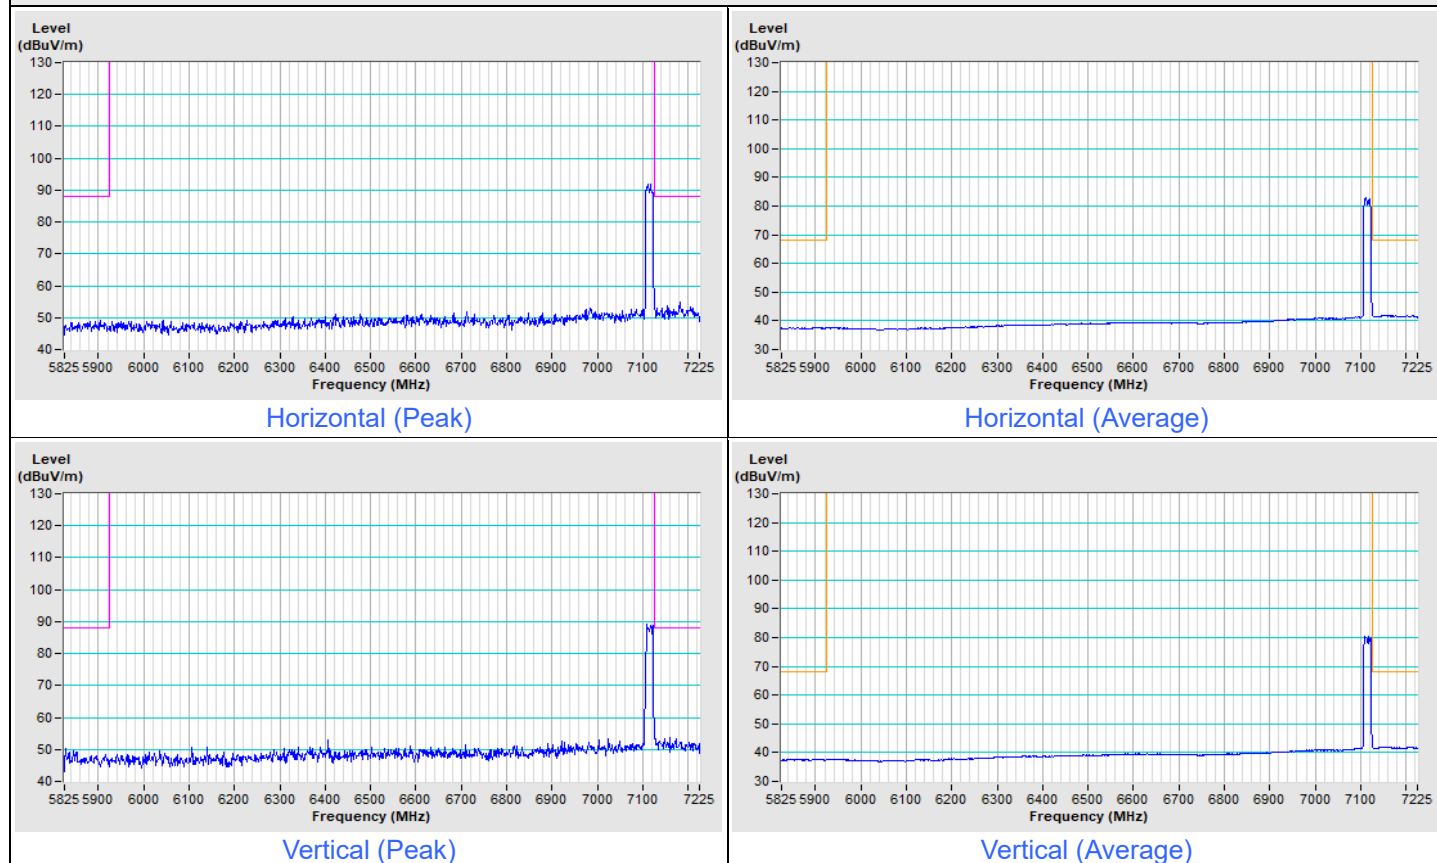

For Integration method:

802.11be (EHT20) Channel 233



Horizontal (Peak)

Horizontal (Average)




Vertical (Peak)


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 227

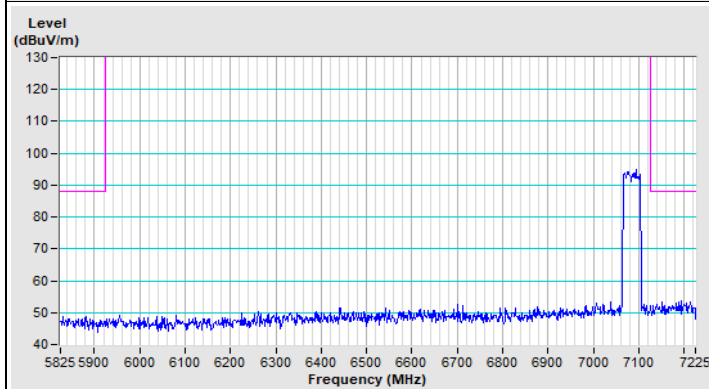


Horizontal (Peak)

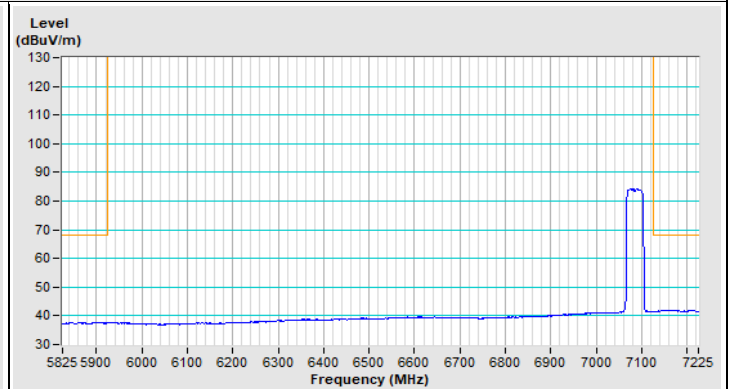

Horizontal (Average)

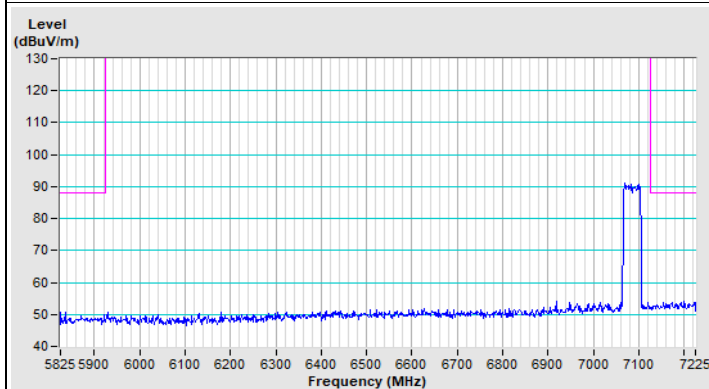


Vertical (Peak)

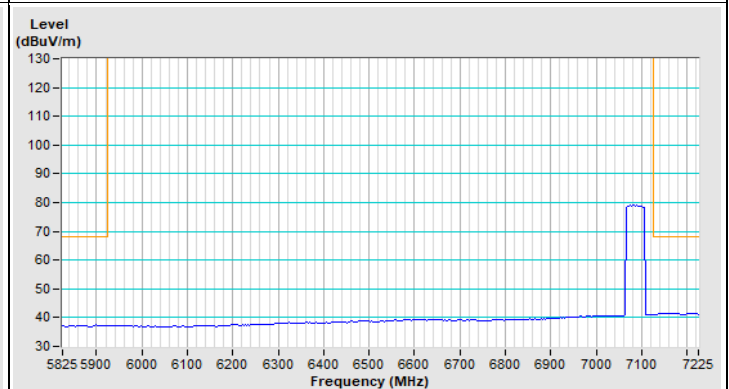


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 215

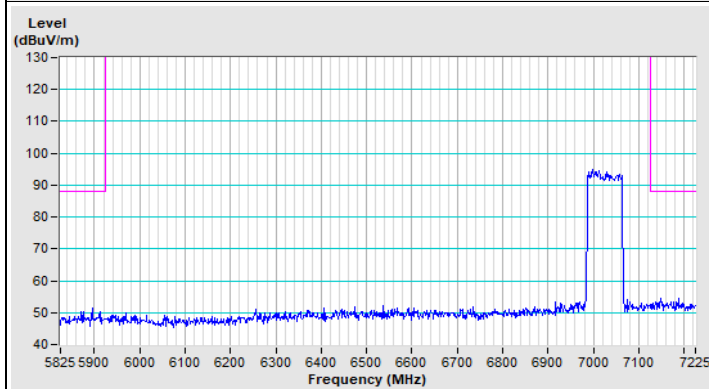


Horizontal (Peak)

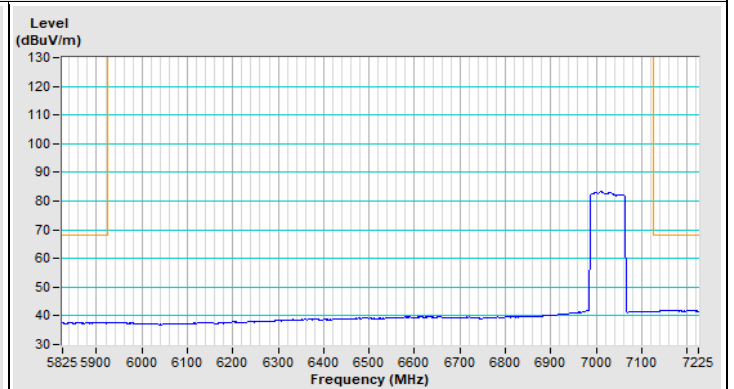

Horizontal (Average)

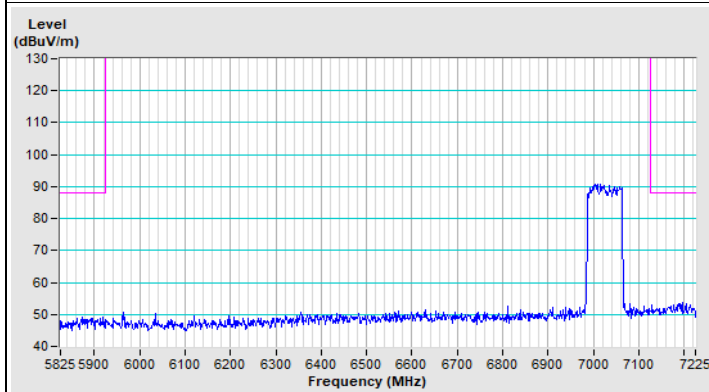


Vertical (Peak)

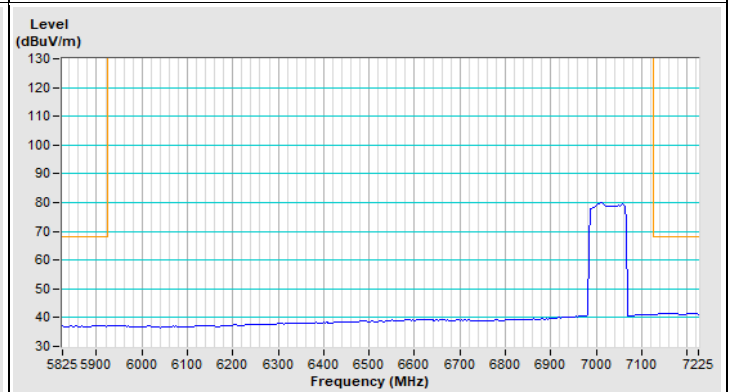


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 207

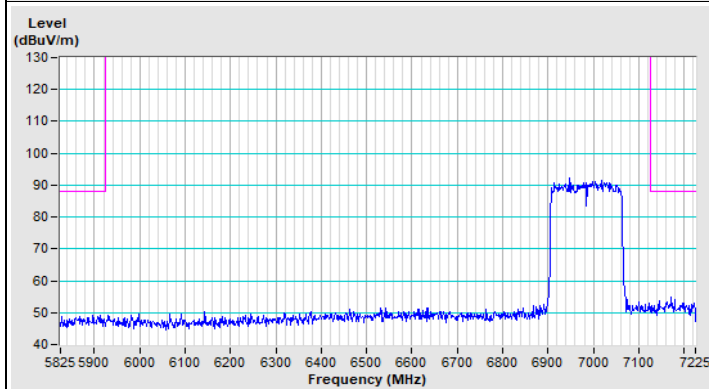


Horizontal (Peak)

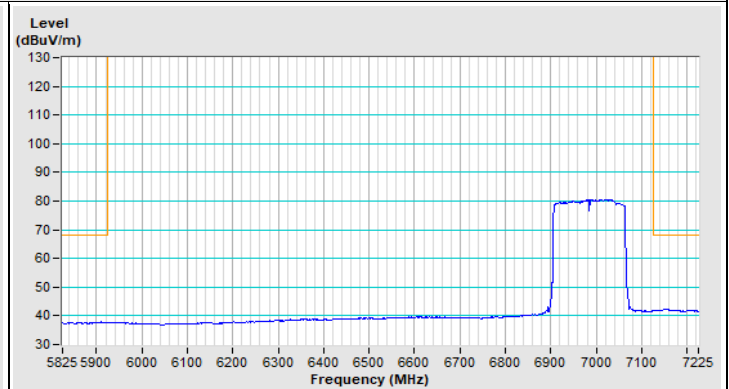

Horizontal (Average)

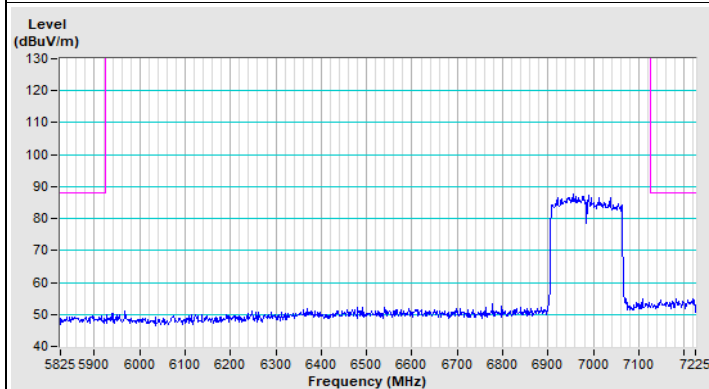

Vertical (Peak)

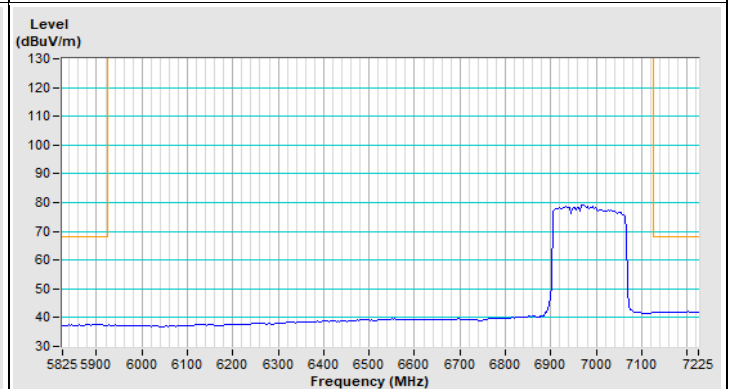

Vertical (Average)


For Integration method:

802.11be (EHT20) 26-tone RU Channel 233



Horizontal (Peak)

Horizontal (Average)

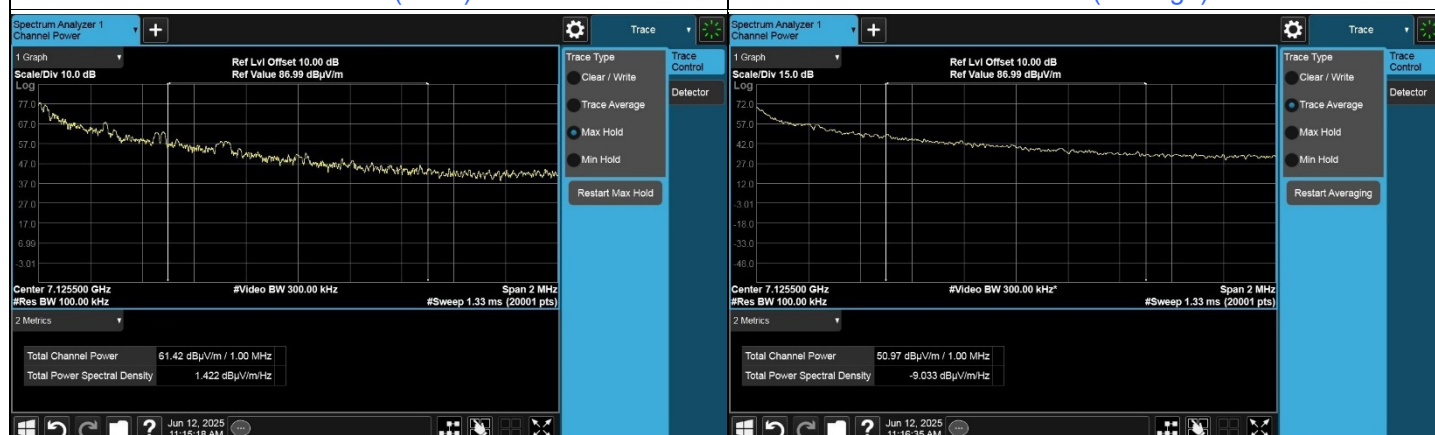


Vertical (Peak)

Vertical (Average)


For Integration method:

802.11be (EHT20) 52-tone RU Channel 233

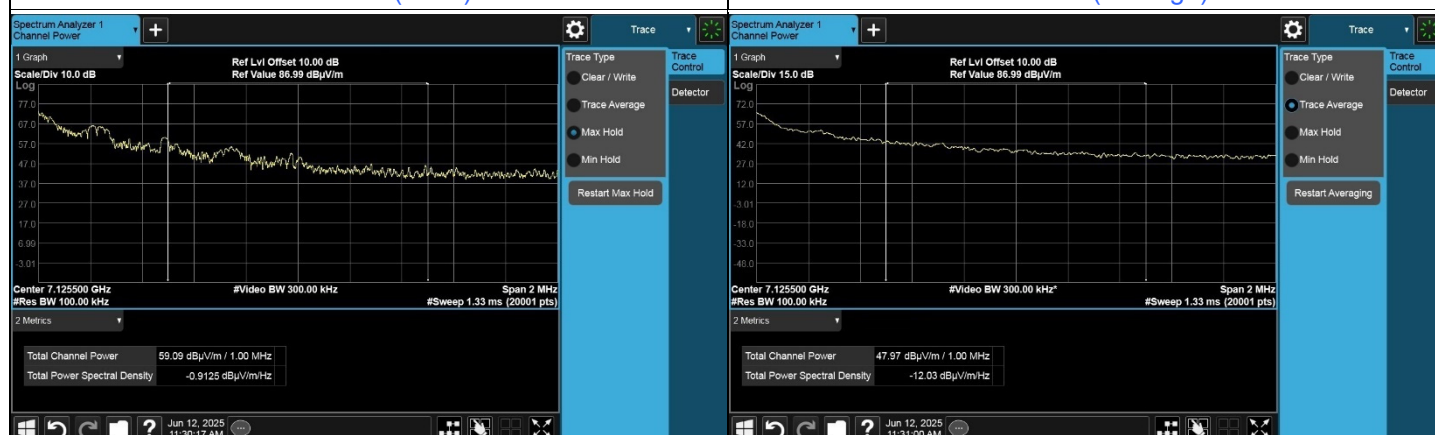


For Integration method:

802.11be (EHT20) 106-tone RU Channel 233

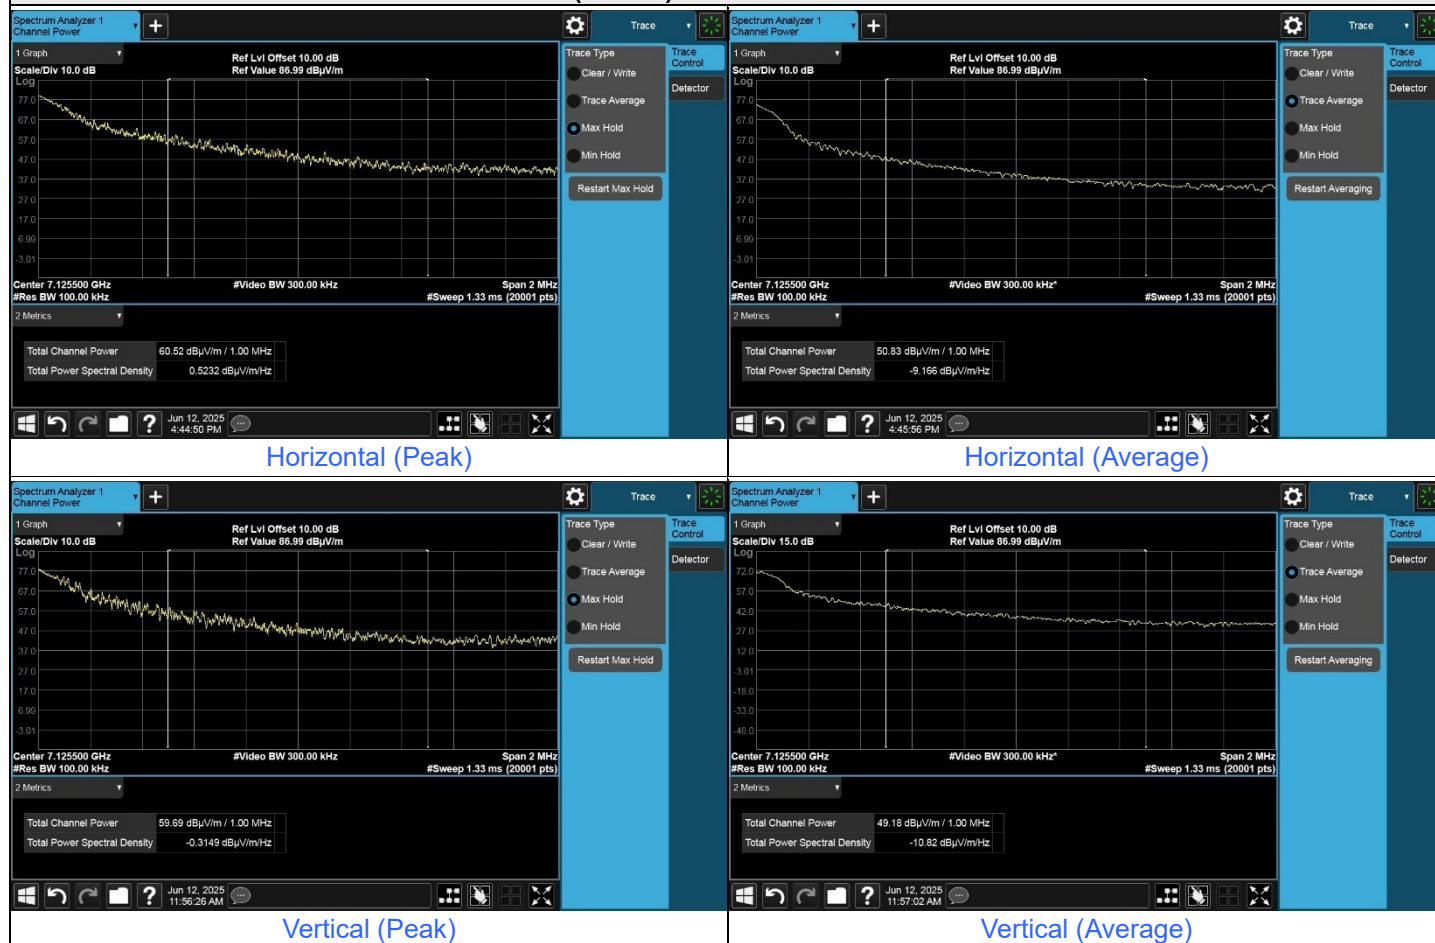


For Integration method:

802.11be (EHT20) 52+26-tone MRU Channel 233

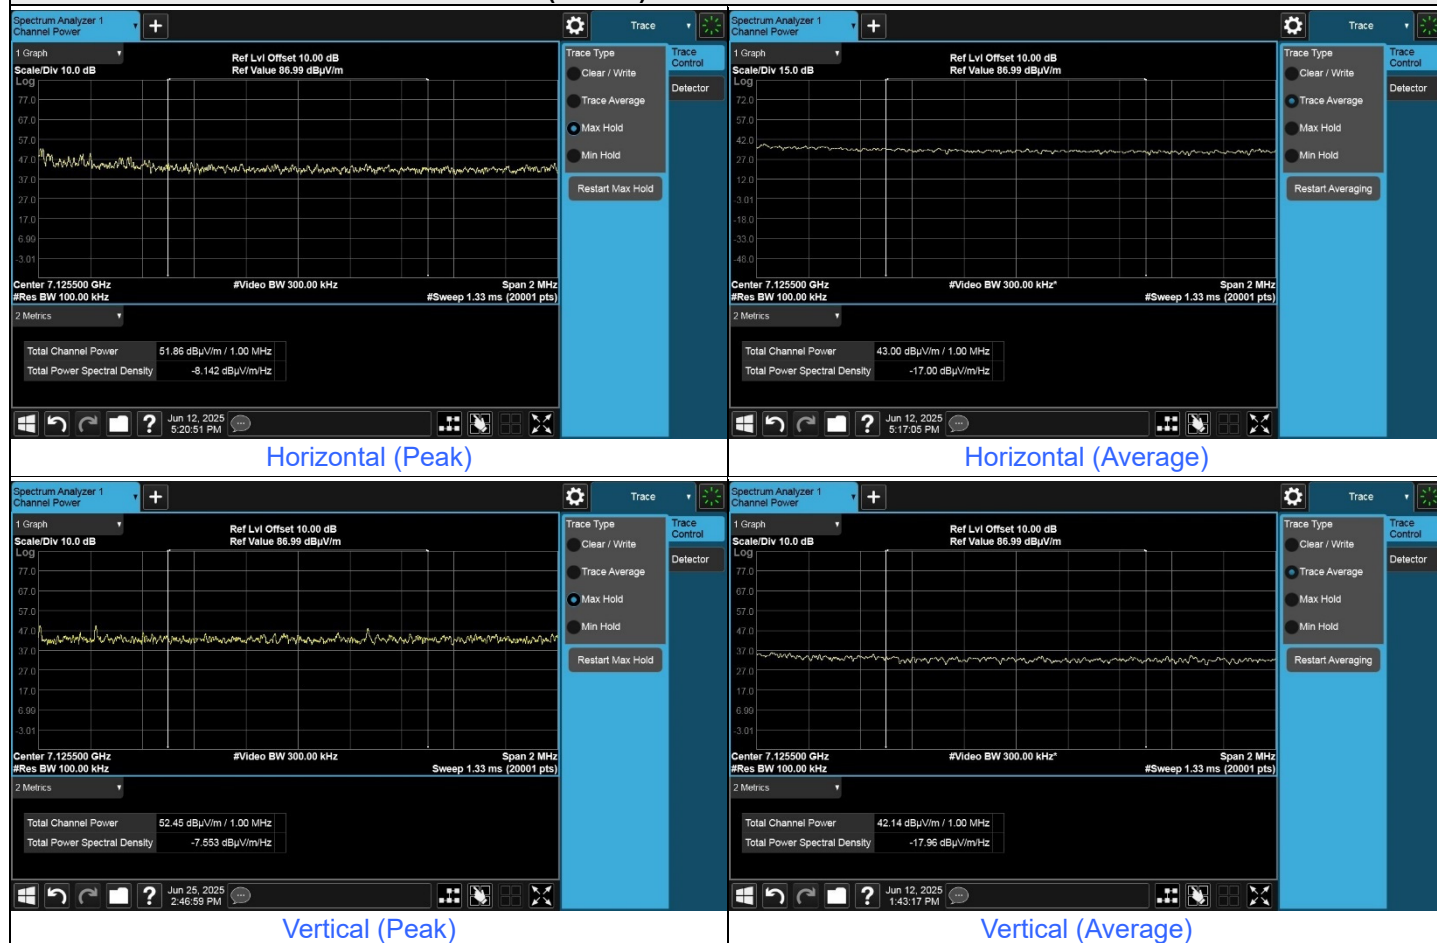


For Integration method:

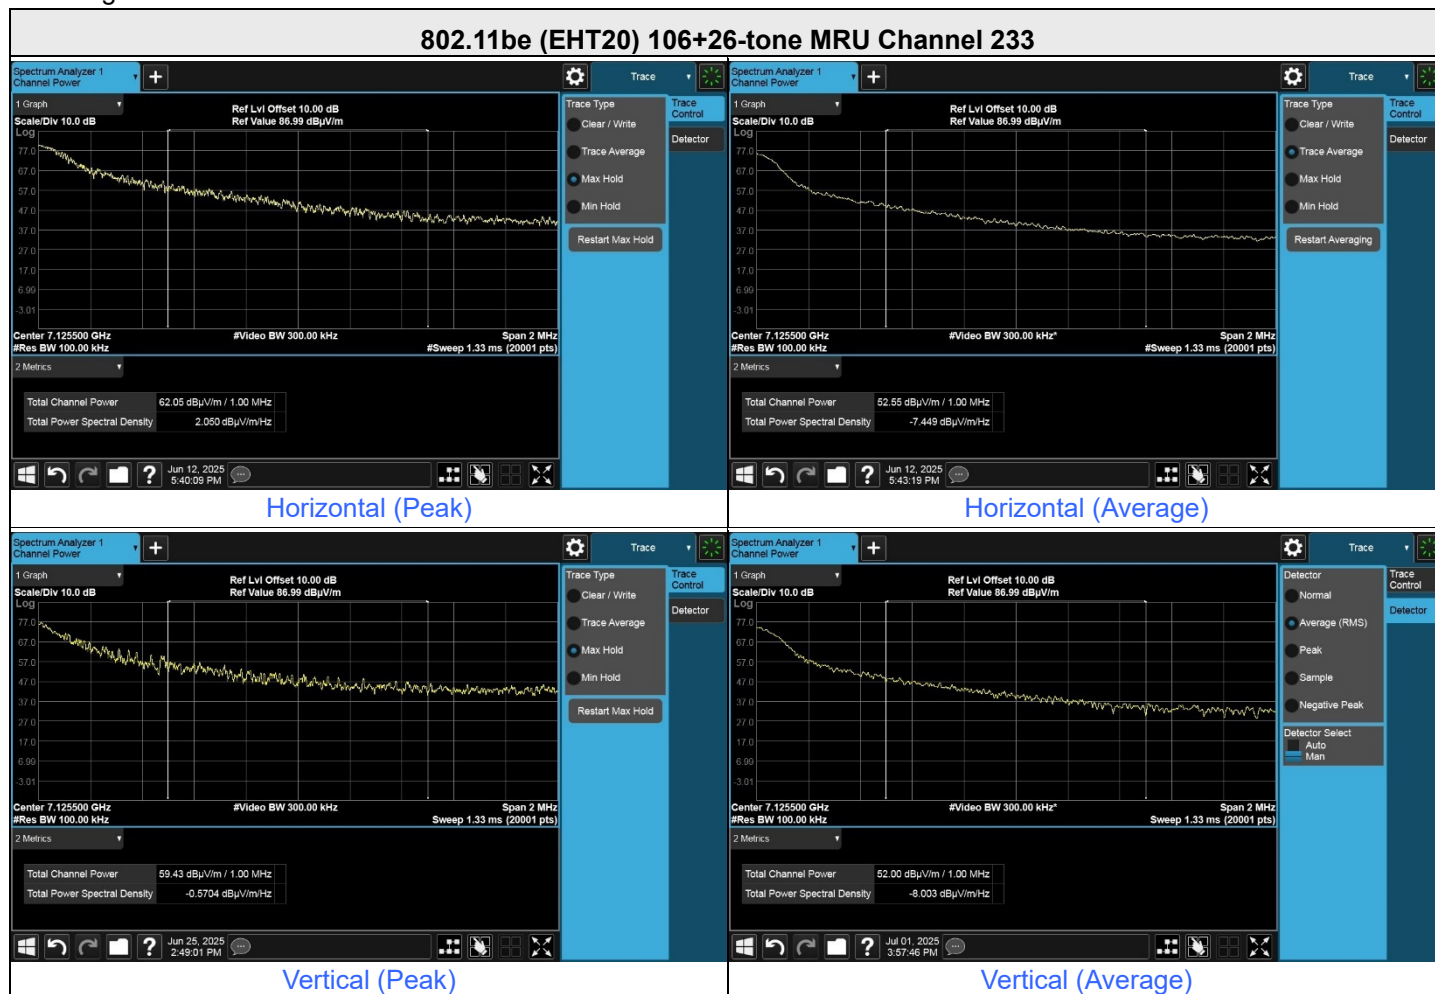


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT80) 484+242-tone MRU Channel 215

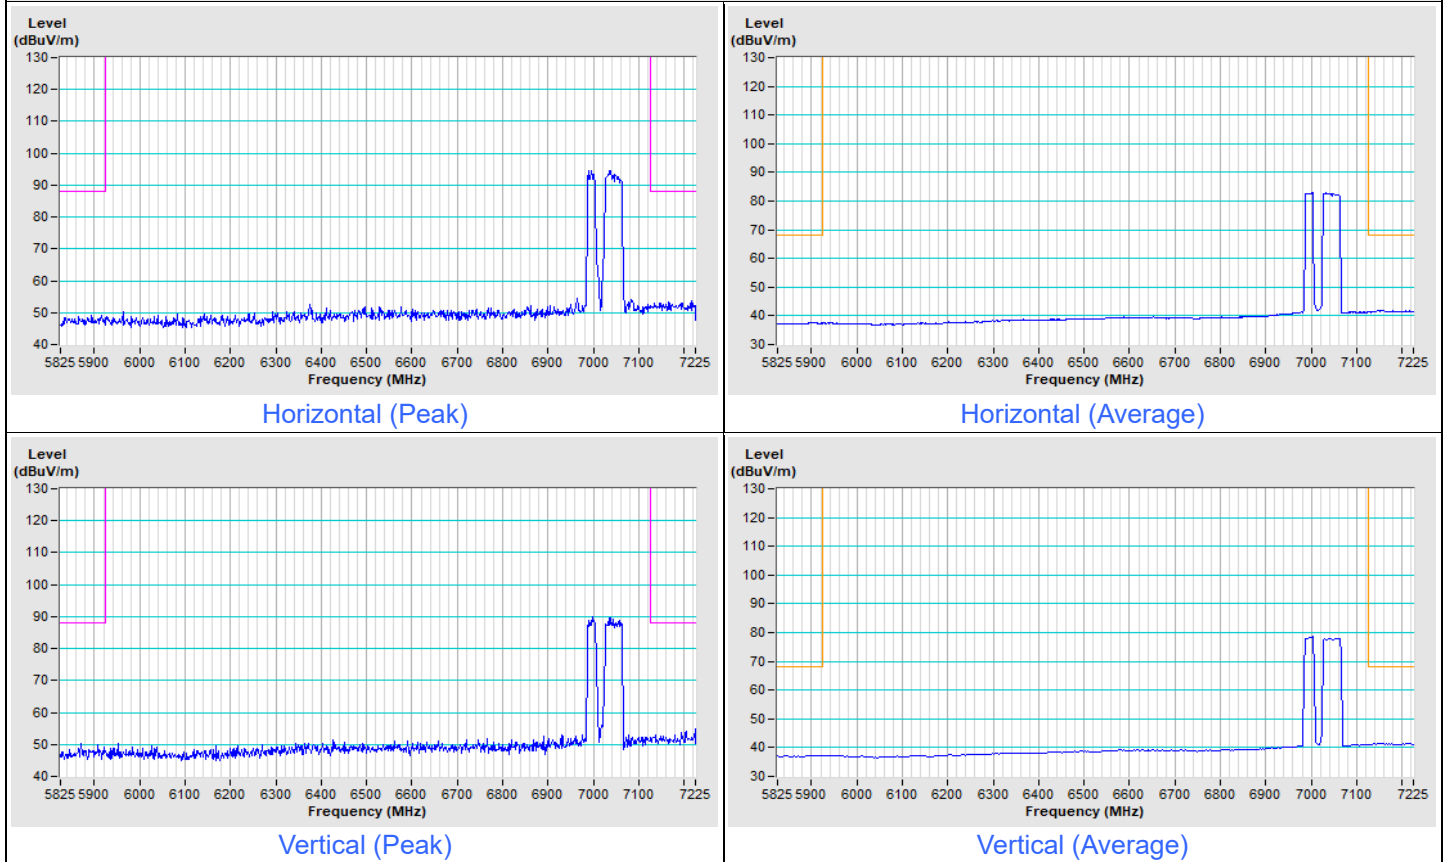


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 207

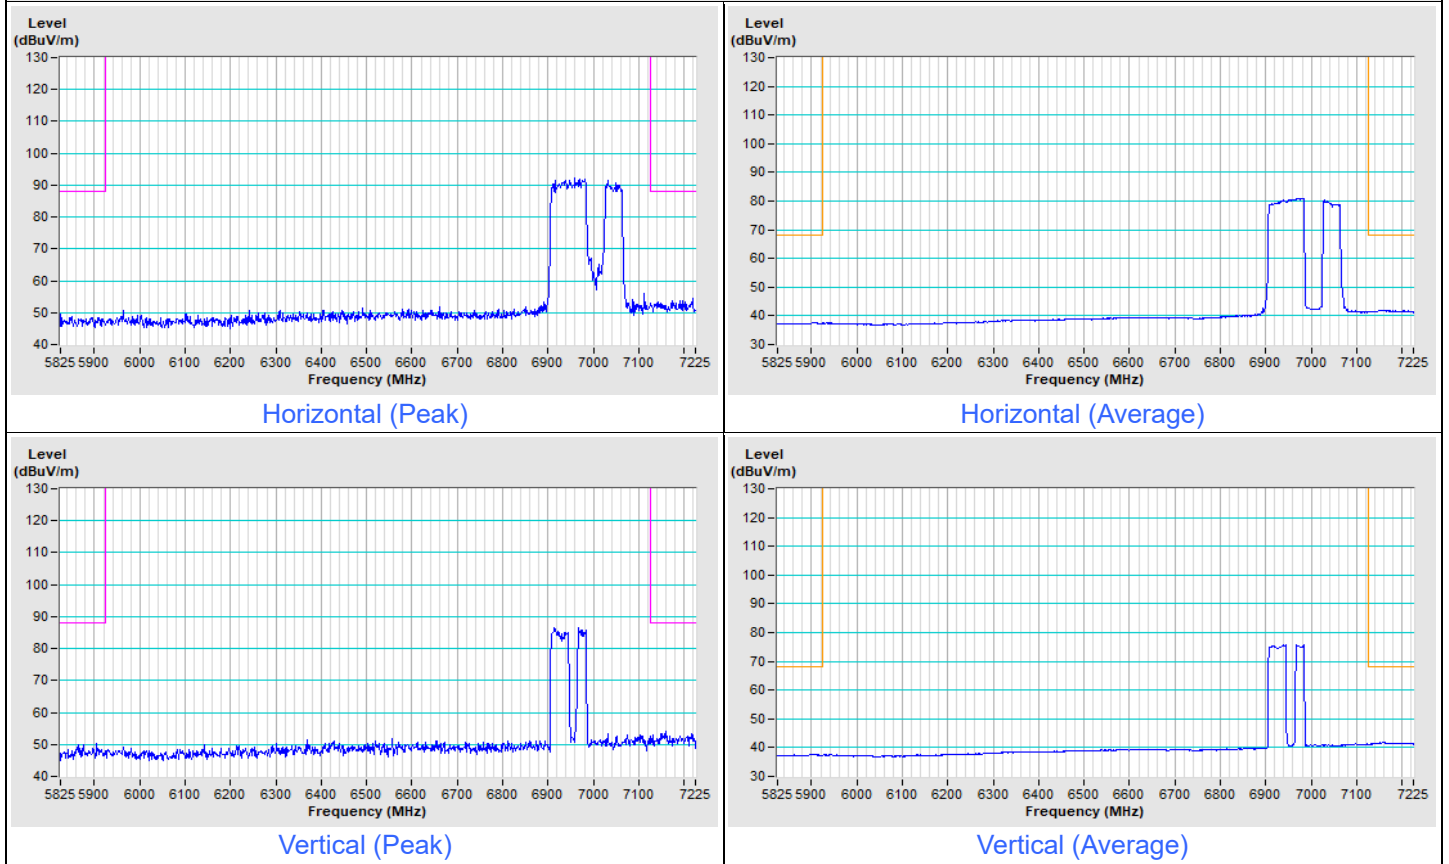


802.11be (EHT160) 996+484+242-tone MRU Channel 207

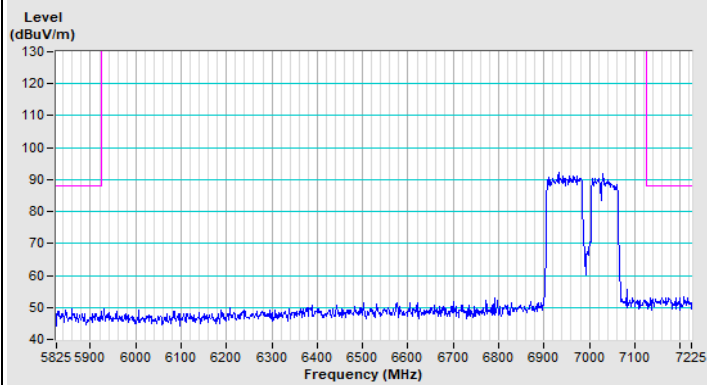


Horizontal (Peak)

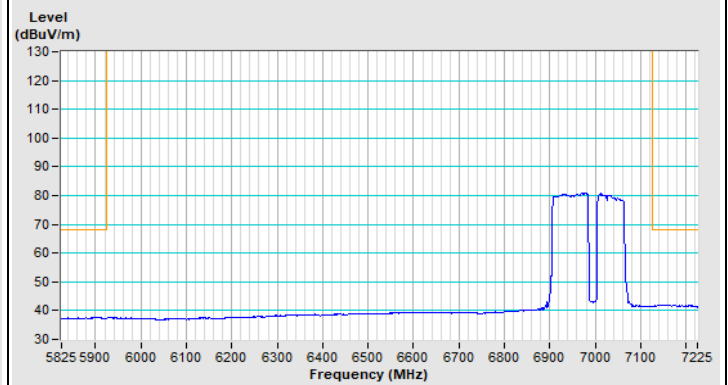

Horizontal (Average)

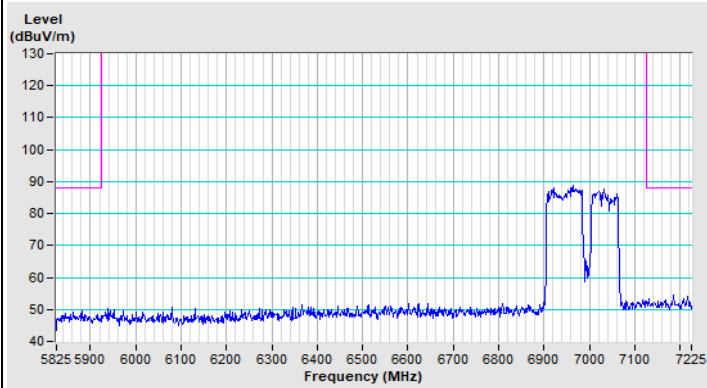

Vertical (Peak)

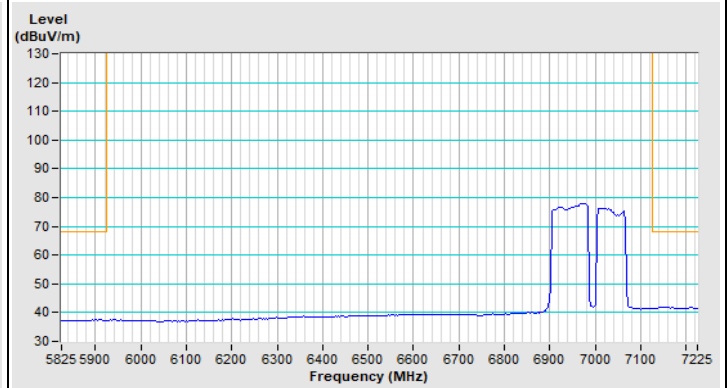

Vertical (Average)

Mode B_1TX

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.3 PK			2.58 H	70	91.6	4.7
2	*6435.00	86.1 AV			2.58 H	70	81.4	4.7
3	#12870.00	48.8 PK	88.2	-39.4	1.64 H	280	36.0	12.8
4	#12870.00	37.9 AV	68.2	-30.3	1.64 H	280	25.1	12.8
5	19305.00	49.3 PK	74.0	-24.7	2.55 H	127	53.2	-3.9
6	19305.00	37.5 AV	54.0	-16.5	2.55 H	127	41.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.7 PK			1.04 V	170	89.0	4.7
2	*6435.00	84.2 AV			1.04 V	170	79.5	4.7
3	#12870.00	46.6 PK	88.2	-41.6	1.85 V	285	33.8	12.8
4	#12870.00	36.3 AV	68.2	-31.9	1.85 V	285	23.5	12.8
5	19305.00	48.7 PK	74.0	-25.3	2.61 V	170	52.6	-3.9
6	19305.00	38.3 AV	54.0	-15.7	2.61 V	170	42.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	96.8 PK			2.63 H	84	91.9	4.9
2	*6475.00	86.5 AV			2.63 H	84	81.6	4.9
3	#12950.00	48.2 PK	88.2	-40.0	1.73 H	271	35.7	12.5
4	#12950.00	37.6 AV	68.2	-30.6	1.73 H	271	25.1	12.5
5	19425.00	48.8 PK	74.0	-25.2	2.61 H	149	52.3	-3.5
6	19425.00	37.3 AV	54.0	-16.7	2.61 H	149	40.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	94.3 PK			1.09 V	171	89.4	4.9
2	*6475.00	84.6 AV			1.09 V	171	79.7	4.9
3	#12950.00	46.4 PK	88.2	-41.8	1.90 V	260	33.9	12.5
4	#12950.00	35.7 AV	68.2	-32.5	1.90 V	260	23.2	12.5
5	19425.00	48.7 PK	74.0	-25.3	2.63 V	194	52.2	-3.5
6	19425.00	37.9 AV	54.0	-16.1	2.63 V	194	41.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.1 PK			2.53 H	85	91.0	5.1
2	*6515.00	85.6 AV			2.53 H	85	80.5	5.1
3	#13030.00	48.8 PK	88.2	-39.4	1.66 H	295	36.5	12.3
4	#13030.00	38.3 AV	68.2	-29.9	1.66 H	295	26.0	12.3
5	19545.00	48.5 PK	74.0	-25.5	2.55 H	144	52.2	-3.7
6	19545.00	37.0 AV	54.0	-17.0	2.55 H	144	40.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	93.6 PK			1.03 V	159	88.5	5.1
2	*6515.00	84.3 AV			1.03 V	159	79.2	5.1
3	#13030.00	47.1 PK	88.2	-41.1	1.85 V	281	34.8	12.3
4	#13030.00	36.4 AV	68.2	-31.8	1.85 V	281	24.1	12.3
5	19545.00	48.4 PK	74.0	-25.6	2.66 V	169	52.1	-3.7
6	19545.00	38.0 AV	54.0	-16.0	2.66 V	169	41.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.7 PK			2.55 H	64	90.8	5.9
2	*6875.00	86.4 AV			2.55 H	64	80.5	5.9
3	#13750.00	49.0 PK	88.2	-39.2	1.73 H	279	35.1	13.9
4	#13750.00	38.3 AV	68.2	-29.9	1.73 H	279	24.4	13.9
5	20625.00	48.4 PK	74.0	-25.6	2.50 H	136	51.7	-3.3
6	20625.00	37.0 AV	54.0	-17.0	2.50 H	136	40.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	94.2 PK			1.04 V	169	88.3	5.9
2	*6875.00	84.6 AV			1.04 V	169	78.7	5.9
3	#13750.00	46.2 PK	88.2	-42.0	1.90 V	265	32.3	13.9
4	#13750.00	35.8 AV	68.2	-32.4	1.90 V	265	21.9	13.9
5	20625.00	49.0 PK	74.0	-25.0	2.55 V	171	52.3	-3.3
6	20625.00	38.7 AV	54.0	-15.3	2.55 V	171	42.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	96.5 PK			2.58 H	60	89.6	6.9
2	*6995.00	86.1 AV			2.58 H	60	79.2	6.9
3	#13990.00	48.6 PK	88.2	-39.6	1.64 H	279	34.1	14.5
4	#13990.00	38.0 AV	68.2	-30.2	1.64 H	279	23.5	14.5
5	20985.00	49.0 PK	74.0	-25.0	2.51 H	125	51.7	-2.7
6	20985.00	37.5 AV	54.0	-16.5	2.51 H	125	40.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	93.5 PK			1.04 V	156	86.6	6.9
2	*6995.00	84.0 AV			1.04 V	156	77.1	6.9
3	#13990.00	46.4 PK	88.2	-41.8	1.85 V	265	31.9	14.5
4	#13990.00	36.1 AV	68.2	-32.1	1.85 V	265	21.6	14.5
5	20985.00	48.8 PK	74.0	-25.2	2.65 V	194	51.5	-2.7
6	20985.00	38.2 AV	54.0	-15.8	2.65 V	194	40.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.9 PK			2.48 H	104	87.4	7.5
2	*7115.00	84.3 AV			2.48 H	104	76.8	7.5
3	#7125.00	55.1 PK	88.2	-33.1	2.48 H	104	47.6	7.5
4	#7125.00	42.3 AV	68.2	-25.9	2.48 H	104	34.8	7.5
5	7250.00	56.3 PK	74.0	-17.7	2.48 H	104	48.6	7.7
6	7250.00	41.9 AV	54.0	-12.1	2.48 H	104	34.2	7.7
7	#14230.00	48.6 PK	88.2	-39.6	1.64 H	285	34.0	14.6
8	#14230.00	37.9 AV	68.2	-30.3	1.64 H	285	23.3	14.6
9	21345.00	49.4 PK	74.0	-24.6	2.58 H	148	51.6	-2.2
10	21345.00	37.5 AV	54.0	-16.5	2.58 H	148	39.7	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.6 PK			1.50 V	85	85.1	7.5
2	*7115.00	82.1 AV			1.50 V	85	74.6	7.5
3	#7125.00	54.2 PK	88.2	-34.0	1.50 V	85	46.7	7.5
4	#7125.00	42.6 AV	68.2	-25.6	1.50 V	85	35.1	7.5
5	7250.00	52.9 PK	74.0	-21.1	1.50 V	85	45.2	7.7
6	7250.00	41.8 AV	54.0	-12.2	1.50 V	85	34.1	7.7
7	#14230.00	45.9 PK	88.2	-42.3	1.89 V	269	31.3	14.6
8	#14230.00	35.7 AV	68.2	-32.5	1.89 V	269	21.1	14.6
9	21345.00	49.6 PK	74.0	-24.4	2.62 V	194	51.8	-2.2
10	21345.00	38.9 AV	54.0	-15.1	2.62 V	194	41.1	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.9 PK			3.98 H	58	92.2	4.7
2	*6435.00	84.9 AV			3.98 H	58	80.2	4.7
3	#12870.00	49.4 PK	88.2	-38.8	1.68 H	295	36.6	12.8
4	#12870.00	38.4 AV	68.2	-29.8	1.68 H	295	25.6	12.8
5	19305.00	49.6 PK	74.0	-24.4	2.50 H	144	53.5	-3.9
6	19305.00	37.8 AV	54.0	-16.2	2.50 H	144	41.7	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	95.5 PK			1.01 V	159	90.8	4.7
2	*6435.00	83.4 AV			1.01 V	159	78.7	4.7
3	#12870.00	46.2 PK	88.2	-42.0	1.81 V	281	33.4	12.8
4	#12870.00	35.6 AV	68.2	-32.6	1.81 V	281	22.8	12.8
5	19305.00	48.9 PK	74.0	-25.1	2.56 V	193	52.8	-3.9
6	19305.00	38.4 AV	54.0	-15.6	2.56 V	193	42.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	97.4 PK			3.99 H	71	92.5	4.9
2	*6475.00	85.2 AV			3.99 H	71	80.3	4.9
3	#12950.00	48.8 PK	88.2	-39.4	1.74 H	272	36.3	12.5
4	#12950.00	38.0 AV	68.2	-30.2	1.74 H	272	25.5	12.5
5	19425.00	48.9 PK	74.0	-25.1	2.59 H	128	52.4	-3.5
6	19425.00	37.3 AV	54.0	-16.7	2.59 H	128	40.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	95.8 PK			1.07 V	162	90.9	4.9
2	*6475.00	83.6 AV			1.07 V	162	78.7	4.9
3	#12950.00	46.4 PK	88.2	-41.8	1.78 V	276	33.9	12.5
4	#12950.00	36.1 AV	68.2	-32.1	1.78 V	276	23.6	12.5
5	19425.00	48.5 PK	74.0	-25.5	2.60 V	192	52.0	-3.5
6	19425.00	38.0 AV	54.0	-16.0	2.60 V	192	41.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.5 PK			3.94 H	58	91.4	5.1
2	*6515.00	84.6 AV			3.94 H	58	79.5	5.1
3	#13030.00	48.1 PK	88.2	-40.1	1.63 H	279	35.8	12.3
4	#13030.00	37.6 AV	68.2	-30.6	1.63 H	279	25.3	12.3
5	19545.00	48.4 PK	74.0	-25.6	2.58 H	134	52.1	-3.7
6	19545.00	36.9 AV	54.0	-17.1	2.58 H	134	40.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	95.0 PK			1.00 V	146	89.9	5.1
2	*6515.00	83.0 AV			1.00 V	146	77.9	5.1
3	#13030.00	46.3 PK	88.2	-41.9	1.79 V	263	34.0	12.3
4	#13030.00	35.8 AV	68.2	-32.4	1.79 V	263	23.5	12.3
5	19545.00	49.6 PK	74.0	-24.4	2.54 V	192	53.3	-3.7
6	19545.00	38.8 AV	54.0	-15.2	2.54 V	192	42.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.8 PK			3.95 H	67	90.9	5.9
2	*6875.00	84.5 AV			3.95 H	67	78.6	5.9
3	#13750.00	48.9 PK	88.2	-39.3	1.74 H	270	35.0	13.9
4	#13750.00	38.0 AV	68.2	-30.2	1.74 H	270	24.1	13.9
5	20625.00	48.9 PK	74.0	-25.1	2.53 H	140	52.2	-3.3
6	20625.00	37.2 AV	54.0	-16.8	2.53 H	140	40.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	95.7 PK			1.00 V	152	89.8	5.9
2	*6875.00	83.4 AV			1.00 V	152	77.5	5.9
3	#13750.00	46.7 PK	88.2	-41.5	1.85 V	285	32.8	13.9
4	#13750.00	36.3 AV	68.2	-31.9	1.85 V	285	22.4	13.9
5	20625.00	48.8 PK	74.0	-25.2	2.56 V	186	52.1	-3.3
6	20625.00	38.2 AV	54.0	-15.8	2.56 V	186	41.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	97.2 PK			3.94 H	66	90.3	6.9
2	*6995.00	85.1 AV			3.94 H	66	78.2	6.9
3	#13990.00	48.2 PK	88.2	-40.0	1.71 H	265	33.7	14.5
4	#13990.00	37.6 AV	68.2	-30.6	1.71 H	265	23.1	14.5
5	20985.00	49.0 PK	74.0	-25.0	2.53 H	122	51.7	-2.7
6	20985.00	37.3 AV	54.0	-16.7	2.53 H	122	40.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	95.2 PK			1.00 V	157	88.3	6.9
2	*6995.00	83.0 AV			1.00 V	157	76.1	6.9
3	#13990.00	46.2 PK	88.2	-42.0	1.90 V	260	31.7	14.5
4	#13990.00	36.1 AV	68.2	-32.1	1.90 V	260	21.6	14.5
5	20985.00	48.4 PK	74.0	-25.6	2.65 V	180	51.1	-2.7
6	20985.00	37.9 AV	54.0	-16.1	2.65 V	180	40.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	96.7 PK			2.30 H	106	89.2	7.5
2	*7115.00	84.4 AV			2.30 H	106	76.9	7.5
3	#7125.00	63.7 PK	88.2	-24.5	2.30 H	106	56.2	7.5
4	#7125.00	52.2 AV	68.2	-16.0	2.30 H	106	44.7	7.5
5	7250.00	54.4 PK	74.0	-19.6	2.30 H	106	46.7	7.7
6	7250.00	41.5 AV	54.0	-12.5	2.30 H	106	33.8	7.7
7	#14230.00	48.3 PK	88.2	-39.9	1.65 H	284	33.7	14.6
8	#14230.00	37.5 AV	68.2	-30.7	1.65 H	284	22.9	14.6
9	21345.00	49.1 PK	74.0	-24.9	2.60 H	148	51.3	-2.2
10	21345.00	37.7 AV	54.0	-16.3	2.60 H	148	39.9	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.4 PK			1.77 V	9	85.9	7.5
2	*7115.00	82.5 AV			1.77 V	9	75.0	7.5
3	#7125.00	58.9 PK	88.2	-29.3	1.77 V	9	51.4	7.5
4	#7125.00	49.5 AV	68.2	-18.7	1.77 V	9	42.0	7.5
5	7250.00	53.6 PK	74.0	-20.4	1.77 V	9	45.9	7.7
6	7250.00	41.0 AV	54.0	-13.0	1.77 V	9	33.3	7.7
7	#14230.00	47.0 PK	88.2	-41.2	1.78 V	275	32.4	14.6
8	#14230.00	36.3 AV	68.2	-31.9	1.78 V	275	21.7	14.6
9	21345.00	49.2 PK	74.0	-24.8	2.64 V	188	51.4	-2.2
10	21345.00	38.6 AV	54.0	-15.4	2.64 V	188	40.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	98.2 PK			3.98 H	59	93.5	4.7
2	*6445.00	85.4 AV			3.98 H	59	80.7	4.7
3	#12890.00	48.6 PK	88.2	-39.6	1.64 H	268	35.7	12.9
4	#12890.00	37.8 AV	68.2	-30.4	1.64 H	268	24.9	12.9
5	19335.00	49.5 PK	74.0	-24.5	2.53 H	134	53.2	-3.7
6	19335.00	37.7 AV	54.0	-16.3	2.53 H	134	41.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	94.4 PK			1.57 V	174	89.7	4.7
2	*6445.00	82.5 AV			1.57 V	174	77.8	4.7
3	#12890.00	46.3 PK	88.2	-41.9	1.85 V	271	33.4	12.9
4	#12890.00	35.9 AV	68.2	-32.3	1.85 V	271	23.0	12.9
5	19335.00	48.9 PK	74.0	-25.1	2.61 V	192	52.6	-3.7
6	19335.00	38.4 AV	54.0	-15.6	2.61 V	192	42.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	97.8 PK			3.97 H	48	92.9	4.9
2	*6485.00	85.2 AV			3.97 H	48	80.3	4.9
3	#12970.00	49.1 PK	88.2	-39.1	1.72 H	269	36.6	12.5
4	#12970.00	38.3 AV	68.2	-29.9	1.72 H	269	25.8	12.5
5	19455.00	48.9 PK	74.0	-25.1	2.58 H	125	52.3	-3.4
6	19455.00	36.9 AV	54.0	-17.1	2.58 H	125	40.3	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	94.3 PK			1.56 V	164	89.4	4.9
2	*6485.00	82.6 AV			1.56 V	164	77.7	4.9
3	#12970.00	46.2 PK	88.2	-42.0	1.79 V	255	33.7	12.5
4	#12970.00	35.8 AV	68.2	-32.4	1.79 V	255	23.3	12.5
5	19455.00	48.4 PK	74.0	-25.6	2.65 V	176	51.8	-3.4
6	19455.00	38.1 AV	54.0	-15.9	2.65 V	176	41.5	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	98.4 PK			3.93 H	55	93.2	5.2
2	*6525.00	85.4 AV			3.93 H	55	80.2	5.2
3	#13050.00	49.1 PK	88.2	-39.1	1.62 H	272	36.6	12.5
4	#13050.00	38.4 AV	68.2	-29.8	1.62 H	272	25.9	12.5
5	19575.00	49.7 PK	74.0	-24.3	2.52 H	147	53.5	-3.8
6	19575.00	37.7 AV	54.0	-16.3	2.52 H	147	41.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	94.8 PK			1.52 V	168	89.6	5.2
2	*6525.00	82.7 AV			1.52 V	168	77.5	5.2
3	#13050.00	46.5 PK	88.2	-41.7	1.84 V	275	34.0	12.5
4	#13050.00	36.0 AV	68.2	-32.2	1.84 V	275	23.5	12.5
5	19575.00	48.7 PK	74.0	-25.3	2.64 V	171	52.5	-3.8
6	19575.00	38.4 AV	54.0	-15.6	2.64 V	171	42.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	97.9 PK			3.98 H	56	92.0	5.9
2	*6885.00	85.1 AV			3.98 H	56	79.2	5.9
3	#13770.00	48.9 PK	88.2	-39.3	1.72 H	264	34.8	14.1
4	#13770.00	38.5 AV	68.2	-29.7	1.72 H	264	24.4	14.1
5	20655.00	49.2 PK	74.0	-24.8	2.49 H	150	52.4	-3.2
6	20655.00	37.2 AV	54.0	-16.8	2.49 H	150	40.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	94.2 PK			1.53 V	163	88.3	5.9
2	*6885.00	82.2 AV			1.53 V	163	76.3	5.9
3	#13770.00	46.3 PK	88.2	-41.9	1.78 V	280	32.2	14.1
4	#13770.00	35.7 AV	68.2	-32.5	1.78 V	280	21.6	14.1
5	20655.00	49.0 PK	74.0	-25.0	2.57 V	196	52.2	-3.2
6	20655.00	38.4 AV	54.0	-15.6	2.57 V	196	41.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	97.6 PK			3.94 H	61	90.8	6.8
2	*6965.00	85.1 AV			3.94 H	61	78.3	6.8
3	#13930.00	48.7 PK	88.2	-39.5	1.66 H	266	34.6	14.1
4	#13930.00	37.7 AV	68.2	-30.5	1.66 H	266	23.6	14.1
5	20895.00	48.5 PK	74.0	-25.5	2.52 H	122	51.1	-2.6
6	20895.00	37.1 AV	54.0	-16.9	2.52 H	122	39.7	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	94.4 PK			1.54 V	175	87.6	6.8
2	*6965.00	82.7 AV			1.54 V	175	75.9	6.8
3	#13930.00	46.2 PK	88.2	-42.0	1.82 V	257	32.1	14.1
4	#13930.00	35.9 AV	68.2	-32.3	1.82 V	257	21.8	14.1
5	20895.00	48.4 PK	74.0	-25.6	2.65 V	170	51.0	-2.6
6	20895.00	37.9 AV	54.0	-16.1	2.65 V	170	40.5	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	96.6 PK			3.96 H	24	89.2	7.4
2	*7085.00	82.6 AV			3.96 H	24	75.2	7.4
3	#7125.00	55.4 PK	88.2	-32.8	3.96 H	24	47.9	7.5
4	#7125.00	42.3 AV	68.2	-25.9	3.96 H	24	34.8	7.5
5	7250.00	54.9 PK	74.0	-19.1	3.96 H	24	47.2	7.7
6	7250.00	41.7 AV	54.0	-12.3	3.96 H	24	34.0	7.7
7	#14170.00	48.5 PK	88.2	-39.7	1.65 H	288	34.0	14.5
8	#14170.00	38.0 AV	68.2	-30.2	1.65 H	288	23.5	14.5
9	21255.00	49.4 PK	74.0	-24.6	2.49 H	143	51.8	-2.4
10	21255.00	37.7 AV	54.0	-16.3	2.49 H	143	40.1	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	87.8 PK			2.09 V	295	80.4	7.4
2	*7085.00	80.2 AV			2.09 V	295	72.8	7.4
3	#7125.00	52.2 PK	88.2	-36.0	2.09 V	295	44.7	7.5
4	#7125.00	42.4 AV	68.2	-25.8	2.09 V	295	34.9	7.5
5	7250.00	51.2 PK	74.0	-22.8	2.09 V	295	43.5	7.7
6	7250.00	41.7 AV	54.0	-12.3	2.09 V	295	34.0	7.7
7	#14170.00	46.6 PK	88.2	-41.6	1.89 V	285	32.1	14.5
8	#14170.00	36.0 AV	68.2	-32.2	1.89 V	285	21.5	14.5
9	21255.00	49.3 PK	74.0	-24.7	2.60 V	178	51.7	-2.4
10	21255.00	38.6 AV	54.0	-15.4	2.60 V	178	41.0	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	97.3 PK			3.92 H	59	92.5	4.8
2	*6465.00	85.6 AV			3.92 H	59	80.8	4.8
3	#12930.00	49.1 PK	88.2	-39.1	1.67 H	291	36.4	12.7
4	#12930.00	38.3 AV	68.2	-29.9	1.67 H	291	25.6	12.7
5	19395.00	48.5 PK	74.0	-25.5	2.54 H	129	52.0	-3.5
6	19395.00	37.0 AV	54.0	-17.0	2.54 H	129	40.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	92.4 PK			1.31 V	300	87.6	4.8
2	*6465.00	80.1 AV			1.31 V	300	75.3	4.8
3	#12930.00	46.9 PK	88.2	-41.3	1.86 V	275	34.2	12.7
4	#12930.00	36.3 AV	68.2	-31.9	1.86 V	275	23.6	12.7
5	19395.00	49.3 PK	74.0	-24.7	2.59 V	194	52.8	-3.5
6	19395.00	38.9 AV	54.0	-15.1	2.59 V	194	42.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	96.8 PK			3.87 H	55	91.4	5.4
2	*6545.00	85.3 AV			3.87 H	55	79.9	5.4
3	#13090.00	48.3 PK	88.2	-39.9	1.68 H	290	35.8	12.5
4	#13090.00	37.9 AV	68.2	-30.3	1.68 H	290	25.4	12.5
5	19635.00	49.4 PK	74.0	-24.6	2.51 H	120	53.4	-4.0
6	19635.00	37.6 AV	54.0	-16.4	2.51 H	120	41.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	92.2 PK			1.34 V	294	86.8	5.4
2	*6545.00	80.2 AV			1.34 V	294	74.8	5.4
3	#13090.00	46.7 PK	88.2	-41.5	1.79 V	256	34.2	12.5
4	#13090.00	36.2 AV	68.2	-32.0	1.79 V	256	23.7	12.5
5	19635.00	48.6 PK	74.0	-25.4	2.58 V	185	52.6	-4.0
6	19635.00	37.9 AV	54.0	-16.1	2.58 V	185	41.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	97.8 PK			3.89 H	51	91.9	5.9
2	*6865.00	85.9 AV			3.89 H	51	80.0	5.9
3	#13730.00	47.9 PK	88.2	-40.3	1.70 H	274	33.9	14.0
4	#13730.00	37.5 AV	68.2	-30.7	1.70 H	274	23.5	14.0
5	20595.00	49.3 PK	74.0	-24.7	2.55 H	141	52.7	-3.4
6	20595.00	37.7 AV	54.0	-16.3	2.55 H	141	41.1	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	93.0 PK			1.36 V	309	87.1	5.9
2	*6865.00	80.6 AV			1.36 V	309	74.7	5.9
3	#13730.00	46.1 PK	88.2	-42.1	1.84 V	267	32.1	14.0
4	#13730.00	35.7 AV	68.2	-32.5	1.84 V	267	21.7	14.0
5	20595.00	48.3 PK	74.0	-25.7	2.55 V	182	51.7	-3.4
6	20595.00	38.1 AV	54.0	-15.9	2.55 V	182	41.5	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	97.3 PK			3.88 H	61	90.6	6.7
2	*6945.00	85.8 AV			3.88 H	61	79.1	6.7
3	#13890.00	48.3 PK	88.2	-39.9	1.67 H	288	34.3	14.0
4	#13890.00	37.8 AV	68.2	-30.4	1.67 H	288	23.8	14.0
5	20835.00	48.9 PK	74.0	-25.1	2.51 H	122	51.6	-2.7
6	20835.00	37.0 AV	54.0	-17.0	2.51 H	122	39.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	92.5 PK			1.35 V	298	85.8	6.7
2	*6945.00	80.1 AV			1.35 V	298	73.4	6.7
3	#13890.00	46.1 PK	88.2	-42.1	1.81 V	270	32.1	14.0
4	#13890.00	35.6 AV	68.2	-32.6	1.81 V	270	21.6	14.0
5	20835.00	48.6 PK	74.0	-25.4	2.66 V	194	51.3	-2.7
6	20835.00	38.0 AV	54.0	-16.0	2.66 V	194	40.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	90.6 PK			3.99 H	19	83.7	6.9
2	*7025.00	82.3 AV			3.99 H	19	75.4	6.9
3	#7125.00	54.1 PK	88.2	-34.1	3.99 H	19	46.6	7.5
4	#7125.00	42.6 AV	68.2	-25.6	3.99 H	19	35.1	7.5
5	7250.00	53.6 PK	74.0	-20.4	3.99 H	19	45.9	7.7
6	7250.00	43.5 AV	54.0	-10.5	3.99 H	19	35.8	7.7
7	#14050.00	49.3 PK	88.2	-38.9	1.62 H	285	34.7	14.6
8	#14050.00	38.5 AV	68.2	-29.7	1.62 H	285	23.9	14.6
9	21075.00	49.3 PK	74.0	-24.7	2.58 H	145	52.0	-2.7
10	21075.00	37.5 AV	54.0	-16.5	2.58 H	145	40.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	87.6 PK			1.59 V	319	80.7	6.9
2	*7025.00	78.6 AV			1.59 V	319	71.7	6.9
3	#7125.00	54.1 PK	88.2	-34.1	1.59 V	319	46.6	7.5
4	#7125.00	41.4 AV	68.2	-26.8	1.59 V	319	33.9	7.5
5	7250.00	54.1 PK	74.0	-19.9	1.59 V	319	46.4	7.7
6	7250.00	42.3 AV	54.0	-11.7	1.59 V	319	34.6	7.7
7	#14050.00	47.0 PK	88.2	-41.2	1.80 V	272	32.4	14.6
8	#14050.00	36.3 AV	68.2	-31.9	1.80 V	272	21.7	14.6
9	21075.00	49.2 PK	74.0	-24.8	2.54 V	167	51.9	-2.7
10	21075.00	38.6 AV	54.0	-15.4	2.54 V	167	41.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	97.3 PK			2.46 H	60	92.3	5.0
2	*6505.00	84.4 AV			2.46 H	60	79.4	5.0
3	#13010.00	49.0 PK	88.2	-39.2	1.68 H	265	36.7	12.3
4	#13010.00	38.3 AV	68.2	-29.9	1.68 H	265	26.0	12.3
5	19515.00	49.2 PK	74.0	-24.8	2.54 H	127	52.7	-3.5
6	19515.00	37.7 AV	54.0	-16.3	2.54 H	127	41.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	90.3 PK			1.51 V	297	85.3	5.0
2	*6505.00	79.2 AV			1.51 V	297	74.2	5.0
3	#13010.00	45.8 PK	88.2	-42.4	1.87 V	279	33.5	12.3
4	#13010.00	35.6 AV	68.2	-32.6	1.87 V	279	23.3	12.3
5	19515.00	48.8 PK	74.0	-25.2	2.54 V	182	52.3	-3.5
6	19515.00	38.4 AV	54.0	-15.6	2.54 V	182	41.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	97.9 PK			2.47 H	61	92.1	5.8
2	*6825.00	84.7 AV			2.47 H	61	78.9	5.8
3	#13650.00	48.5 PK	88.2	-39.7	1.66 H	282	34.6	13.9
4	#13650.00	38.0 AV	68.2	-30.2	1.66 H	282	24.1	13.9
5	20475.00	49.4 PK	74.0	-24.6	2.53 H	136	52.3	-2.9
6	20475.00	37.6 AV	54.0	-16.4	2.53 H	136	40.5	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	90.1 PK			1.50 V	297	84.3	5.8
2	*6825.00	78.8 AV			1.50 V	297	73.0	5.8
3	#13650.00	46.2 PK	88.2	-42.0	1.87 V	273	32.3	13.9
4	#13650.00	35.9 AV	68.2	-32.3	1.87 V	273	22.0	13.9
5	20475.00	48.5 PK	74.0	-25.5	2.64 V	198	51.4	-2.9
6	20475.00	38.2 AV	54.0	-15.8	2.64 V	198	41.1	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	93.8 PK			1.02 H	60	86.9	6.9
2	*6985.00	81.2 AV			1.02 H	60	74.3	6.9
3	#7125.00	59.3 PK	88.2	-28.9	1.02 H	60	51.8	7.5
4	#7125.00	44.1 AV	68.2	-24.1	1.02 H	60	36.6	7.5
5	7250.00	57.4 PK	74.0	-16.6	1.02 H	60	49.7	7.7
6	7250.00	43.9 AV	54.0	-10.1	1.02 H	60	36.2	7.7
7	#13970.00	49.1 PK	88.2	-39.1	1.71 H	293	34.7	14.4
8	#13970.00	38.5 AV	68.2	-29.7	1.71 H	293	24.1	14.4
9	20955.00	48.3 PK	74.0	-25.7	2.50 H	143	50.9	-2.6
10	20955.00	36.8 AV	54.0	-17.2	2.50 H	143	39.4	-2.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	87.2 PK			1.64 V	313	80.3	6.9
2	*6985.00	75.7 AV			1.64 V	313	68.8	6.9
3	#7125.00	52.8 PK	88.2	-35.4	1.64 V	313	45.3	7.5
4	#7125.00	41.6 AV	68.2	-26.6	1.64 V	313	34.1	7.5
5	7250.00	53.3 PK	74.0	-20.7	1.64 V	313	45.6	7.7
6	7250.00	41.5 AV	54.0	-12.5	1.64 V	313	33.8	7.7
7	#13970.00	46.6 PK	88.2	-41.6	1.84 V	266	32.2	14.4
8	#13970.00	36.0 AV	68.2	-32.2	1.84 V	266	21.6	14.4
9	20955.00	49.3 PK	74.0	-24.7	2.55 V	175	51.9	-2.6
10	20955.00	38.6 AV	54.0	-15.4	2.55 V	175	41.2	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	92.5 PK			2.03 H	286	87.8	4.7
2	*6435.00	81.5 AV			2.03 H	286	76.8	4.7
3	#12870.00	48.1 PK	88.2	-40.1	1.78 H	243	35.3	12.8
4	#12870.00	37.0 AV	68.2	-31.2	1.78 H	243	24.2	12.8
5	19305.00	49.5 PK	74.0	-24.5	2.72 H	162	53.4	-3.9
6	19305.00	38.0 AV	54.0	-16.0	2.72 H	162	41.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	90.9 PK			1.36 V	300	86.2	4.7
2	*6435.00	80.4 AV			1.36 V	300	75.7	4.7
3	#12870.00	47.6 PK	88.2	-40.6	1.83 V	262	34.8	12.8
4	#12870.00	36.9 AV	68.2	-31.3	1.83 V	262	24.1	12.8
5	19305.00	48.6 PK	74.0	-25.4	2.57 V	169	52.5	-3.9
6	19305.00	37.3 AV	54.0	-16.7	2.57 V	169	41.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	92.9 PK			2.01 H	299	88.0	4.9
2	*6475.00	81.8 AV			2.01 H	299	76.9	4.9
3	#12950.00	48.1 PK	88.2	-40.1	1.75 H	253	35.6	12.5
4	#12950.00	37.3 AV	68.2	-30.9	1.75 H	253	24.8	12.5
5	19425.00	49.2 PK	74.0	-24.8	2.65 H	153	52.7	-3.5
6	19425.00	38.1 AV	54.0	-15.9	2.65 H	153	41.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	91.3 PK			1.41 V	287	86.4	4.9
2	*6475.00	80.5 AV			1.41 V	287	75.6	4.9
3	#12950.00	47.6 PK	88.2	-40.6	1.77 V	264	35.1	12.5
4	#12950.00	36.8 AV	68.2	-31.4	1.77 V	264	24.3	12.5
5	19425.00	48.8 PK	74.0	-25.2	2.54 V	165	52.3	-3.5
6	19425.00	37.6 AV	54.0	-16.4	2.54 V	165	41.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	92.0 PK			2.00 H	287	86.9	5.1
2	*6515.00	81.1 AV			2.00 H	287	76.0	5.1
3	#13030.00	48.5 PK	88.2	-39.7	1.74 H	251	36.2	12.3
4	#13030.00	37.6 AV	68.2	-30.6	1.74 H	251	25.3	12.3
5	19545.00	49.1 PK	74.0	-24.9	2.66 H	177	52.8	-3.7
6	19545.00	37.8 AV	54.0	-16.2	2.66 H	177	41.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	90.6 PK			1.33 V	299	85.5	5.1
2	*6515.00	80.2 AV			1.33 V	299	75.1	5.1
3	#13030.00	47.5 PK	88.2	-40.7	1.85 V	244	35.2	12.3
4	#13030.00	36.8 AV	68.2	-31.4	1.85 V	244	24.5	12.3
5	19545.00	49.0 PK	74.0	-25.0	2.61 V	182	52.7	-3.7
6	19545.00	37.4 AV	54.0	-16.6	2.61 V	182	41.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	92.4 PK			2.01 H	279	86.5	5.9
2	*6875.00	81.7 AV			2.01 H	279	75.8	5.9
3	#13750.00	48.6 PK	88.2	-39.6	1.82 H	257	34.7	13.9
4	#13750.00	37.5 AV	68.2	-30.7	1.82 H	257	23.6	13.9
5	20625.00	49.2 PK	74.0	-24.8	2.64 H	178	52.5	-3.3
6	20625.00	37.8 AV	54.0	-16.2	2.64 H	178	41.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	91.0 PK			1.36 V	286	85.1	5.9
2	*6875.00	80.6 AV			1.36 V	286	74.7	5.9
3	#13750.00	46.7 PK	88.2	-41.5	1.86 V	259	32.8	13.9
4	#13750.00	36.4 AV	68.2	-31.8	1.86 V	259	22.5	13.9
5	20625.00	49.7 PK	74.0	-24.3	2.53 V	180	53.0	-3.3
6	20625.00	38.2 AV	54.0	-15.8	2.53 V	180	41.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	93.0 PK			2.02 H	297	86.1	6.9
2	*6995.00	81.8 AV			2.02 H	297	74.9	6.9
3	#13990.00	47.4 PK	88.2	-40.8	1.74 H	273	32.9	14.5
4	#13990.00	36.7 AV	68.2	-31.5	1.74 H	273	22.2	14.5
5	20985.00	48.4 PK	74.0	-25.6	2.66 H	175	51.1	-2.7
6	20985.00	37.2 AV	54.0	-16.8	2.66 H	175	39.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	91.2 PK			1.34 V	309	84.3	6.9
2	*6995.00	80.8 AV			1.34 V	309	73.9	6.9
3	#13990.00	47.1 PK	88.2	-41.1	1.81 V	252	32.6	14.5
4	#13990.00	36.8 AV	68.2	-31.4	1.81 V	252	22.3	14.5
5	20985.00	48.8 PK	74.0	-25.2	2.64 V	187	51.5	-2.7
6	20985.00	37.3 AV	54.0	-16.7	2.64 V	187	40.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	88.9 PK			2.00 H	304	81.4	7.5
2	*7115.00	78.5 AV			2.00 H	304	71.0	7.5
3	#7125.00	60.9 PK	88.2	-27.3	2.00 H	304	53.4	7.5
4	#7125.00	51.0 AV	68.2	-17.2	2.00 H	304	43.5	7.5
5	7250.00	53.9 PK	74.0	-20.1	2.00 H	304	46.2	7.7
6	7250.00	40.6 AV	54.0	-13.4	2.00 H	304	32.9	7.7
7	#14230.00	47.8 PK	88.2	-40.4	1.80 H	261	33.2	14.6
8	#14230.00	36.9 AV	68.2	-31.3	1.80 H	261	22.3	14.6
9	21345.00	48.7 PK	74.0	-25.3	2.65 H	150	50.9	-2.2
10	21345.00	37.2 AV	54.0	-16.8	2.65 H	150	39.4	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	88.6 PK			1.01 V	16	81.1	7.5
2	*7115.00	78.1 AV			1.01 V	16	70.6	7.5
3	#7125.00	58.2 PK	88.2	-30.0	1.01 V	16	50.7	7.5
4	#7125.00	49.2 AV	68.2	-19.0	1.01 V	16	41.7	7.5
5	7250.00	55.9 PK	74.0	-18.1	1.01 V	16	48.2	7.7
6	7250.00	43.8 AV	54.0	-10.2	1.01 V	16	36.1	7.7
7	#14230.00	47.4 PK	88.2	-40.8	1.80 V	260	32.8	14.6
8	#14230.00	36.6 AV	68.2	-31.6	1.80 V	260	22.0	14.6
9	21345.00	49.2 PK	74.0	-24.8	2.59 V	184	51.4	-2.2
10	21345.00	37.8 AV	54.0	-16.2	2.59 V	184	40.0	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.4 PK			2.00 H	0	88.7	4.7
2	*6435.00	91.9 AV			2.00 H	0	87.2	4.7
3	#12870.00	48.4 PK	88.2	-39.8	1.75 H	249	35.6	12.8
4	#12870.00	37.6 AV	68.2	-30.6	1.75 H	249	24.8	12.8
5	19305.00	48.7 PK	74.0	-25.3	2.66 H	158	52.6	-3.9
6	19305.00	37.6 AV	54.0	-16.4	2.66 H	158	41.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	88.1 PK			1.88 V	167	83.4	4.7
2	*6435.00	77.7 AV			1.88 V	167	73.0	4.7
3	#12870.00	46.7 PK	88.2	-41.5	1.76 V	240	33.9	12.8
4	#12870.00	36.3 AV	68.2	-31.9	1.76 V	240	23.5	12.8
5	19305.00	49.4 PK	74.0	-24.6	2.56 V	157	53.3	-3.9
6	19305.00	38.0 AV	54.0	-16.0	2.56 V	157	41.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	93.1 PK			2.00 H	300	88.2	4.9
2	*6475.00	91.4 AV			2.00 H	300	86.5	4.9
3	#12950.00	48.6 PK	88.2	-39.6	1.81 H	262	36.1	12.5
4	#12950.00	37.5 AV	68.2	-30.7	1.81 H	262	25.0	12.5
5	19425.00	49.0 PK	74.0	-25.0	2.66 H	178	52.5	-3.5
6	19425.00	37.6 AV	54.0	-16.4	2.66 H	178	41.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	87.8 PK			1.86 V	169	82.9	4.9
2	*6475.00	77.3 AV			1.86 V	169	72.4	4.9
3	#12950.00	47.8 PK	88.2	-40.4	1.76 V	252	35.3	12.5
4	#12950.00	37.1 AV	68.2	-31.1	1.76 V	252	24.6	12.5
5	19425.00	49.0 PK	74.0	-25.0	2.60 V	175	52.5	-3.5
6	19425.00	37.5 AV	54.0	-16.5	2.60 V	175	41.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	93.5 PK			2.00 H	276	88.4	5.1
2	*6515.00	91.9 AV			2.00 H	276	86.8	5.1
3	#13030.00	48.3 PK	88.2	-39.9	1.75 H	259	36.0	12.3
4	#13030.00	37.4 AV	68.2	-30.8	1.75 H	259	25.1	12.3
5	19545.00	48.7 PK	74.0	-25.3	2.71 H	180	52.4	-3.7
6	19545.00	37.6 AV	54.0	-16.4	2.71 H	180	41.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	88.2 PK			1.84 V	153	83.1	5.1
2	*6515.00	77.7 AV			1.84 V	153	72.6	5.1
3	#13030.00	46.9 PK	88.2	-41.3	1.84 V	254	34.6	12.3
4	#13030.00	36.5 AV	68.2	-31.7	1.84 V	254	24.2	12.3
5	19545.00	49.2 PK	74.0	-24.8	2.62 V	172	52.9	-3.7
6	19545.00	37.7 AV	54.0	-16.3	2.62 V	172	41.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	93.0 PK			2.05 H	293	87.1	5.9
2	*6875.00	91.7 AV			2.05 H	293	85.8	5.9
3	#13750.00	47.4 PK	88.2	-40.8	1.73 H	254	33.5	13.9
4	#13750.00	36.7 AV	68.2	-31.5	1.73 H	254	22.8	13.9
5	20625.00	49.3 PK	74.0	-24.7	2.68 H	170	52.6	-3.3
6	20625.00	38.0 AV	54.0	-16.0	2.68 H	170	41.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	87.5 PK			1.91 V	177	81.6	5.9
2	*6875.00	77.4 AV			1.91 V	177	71.5	5.9
3	#13750.00	46.8 PK	88.2	-41.4	1.80 V	238	32.9	13.9
4	#13750.00	36.5 AV	68.2	-31.7	1.80 V	238	22.6	13.9
5	20625.00	48.5 PK	74.0	-25.5	2.58 V	171	51.8	-3.3
6	20625.00	37.3 AV	54.0	-16.7	2.58 V	171	40.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	93.4 PK			2.07 H	274	86.5	6.9
2	*6995.00	91.9 AV			2.07 H	274	85.0	6.9
3	#13990.00	47.5 PK	88.2	-40.7	1.75 H	262	33.0	14.5
4	#13990.00	36.6 AV	68.2	-31.6	1.75 H	262	22.1	14.5
5	20985.00	48.8 PK	74.0	-25.2	2.67 H	172	51.5	-2.7
6	20985.00	37.4 AV	54.0	-16.6	2.67 H	172	40.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	87.9 PK			1.93 V	161	81.0	6.9
2	*6995.00	77.7 AV			1.93 V	161	70.8	6.9
3	#13990.00	48.0 PK	88.2	-40.2	1.75 V	260	33.5	14.5
4	#13990.00	37.3 AV	68.2	-30.9	1.75 V	260	22.8	14.5
5	20985.00	48.7 PK	74.0	-25.3	2.56 V	184	51.4	-2.7
6	20985.00	37.6 AV	54.0	-16.4	2.56 V	184	40.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.1 PK			2.09 H	94	81.6	7.5
2	*7115.00	80.6 AV			2.09 H	94	73.1	7.5
3	#7125.00	53.7 PK	88.2	-34.5	2.09 H	94	46.2	7.5
4	#7125.00	43.8 AV	68.2	-24.4	2.09 H	94	36.3	7.5
5	7250.00	51.4 PK	74.0	-22.6	2.09 H	94	43.7	7.7
6	7250.00	40.9 AV	54.0	-13.1	2.09 H	94	33.2	7.7
7	#14230.00	48.4 PK	88.2	-39.8	1.79 H	256	33.8	14.6
8	#14230.00	37.5 AV	68.2	-30.7	1.79 H	256	22.9	14.6
9	21345.00	48.8 PK	74.0	-25.2	2.67 H	179	51.0	-2.2
10	21345.00	37.8 AV	54.0	-16.2	2.67 H	179	40.0	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	85.1 PK			1.04 V	1	77.6	7.5
2	*7115.00	76.9 AV			1.04 V	1	69.4	7.5
3	#7125.00	54.3 PK	88.2	-33.9	1.04 V	1	46.8	7.5
4	#7125.00	44.1 AV	68.2	-24.1	1.04 V	1	36.6	7.5
5	7250.00	55.9 PK	74.0	-18.1	1.04 V	1	48.2	7.7
6	7250.00	44.2 AV	54.0	-9.8	1.04 V	1	36.5	7.7
7	#14230.00	47.4 PK	88.2	-40.8	1.82 V	252	32.8	14.6
8	#14230.00	37.1 AV	68.2	-31.1	1.82 V	252	22.5	14.6
9	21345.00	49.4 PK	74.0	-24.6	2.54 V	169	51.6	-2.2
10	21345.00	38.3 AV	54.0	-15.7	2.54 V	169	40.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.7 PK			2.11 H	287	92.0	4.7
2	*6435.00	82.5 AV			2.11 H	287	77.8	4.7
3	#12870.00	48.0 PK	88.2	-40.2	1.77 H	245	35.2	12.8
4	#12870.00	37.2 AV	68.2	-31.0	1.77 H	245	24.4	12.8
5	19305.00	49.4 PK	74.0	-24.6	2.64 H	161	53.3	-3.9
6	19305.00	38.0 AV	54.0	-16.0	2.64 H	161	41.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	91.5 PK			1.83 V	156	86.8	4.7
2	*6435.00	80.4 AV			1.83 V	156	75.7	4.7
3	#12870.00	47.7 PK	88.2	-40.5	1.84 V	240	34.9	12.8
4	#12870.00	37.0 AV	68.2	-31.2	1.84 V	240	24.2	12.8
5	19305.00	48.9 PK	74.0	-25.1	2.64 V	178	52.8	-3.9
6	19305.00	37.9 AV	54.0	-16.1	2.64 V	178	41.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	96.4 PK			2.09 H	290	91.5	4.9
2	*6475.00	82.2 AV			2.09 H	290	77.3	4.9
3	#12950.00	48.5 PK	88.2	-39.7	1.74 H	254	36.0	12.5
4	#12950.00	37.5 AV	68.2	-30.7	1.74 H	254	25.0	12.5
5	19425.00	48.7 PK	74.0	-25.3	2.72 H	160	52.2	-3.5
6	19425.00	37.3 AV	54.0	-16.7	2.72 H	160	40.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	91.5 PK			1.80 V	156	86.6	4.9
2	*6475.00	80.5 AV			1.80 V	156	75.6	4.9
3	#12950.00	47.6 PK	88.2	-40.6	1.80 V	236	35.1	12.5
4	#12950.00	37.2 AV	68.2	-31.0	1.80 V	236	24.7	12.5
5	19425.00	49.3 PK	74.0	-24.7	2.60 V	165	52.8	-3.5
6	19425.00	38.2 AV	54.0	-15.8	2.60 V	165	41.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.3 PK			2.13 H	300	91.2	5.1
2	*6515.00	82.2 AV			2.13 H	300	77.1	5.1
3	#13030.00	47.8 PK	88.2	-40.4	1.77 H	267	35.5	12.3
4	#13030.00	37.1 AV	68.2	-31.1	1.77 H	267	24.8	12.3
5	19545.00	49.3 PK	74.0	-24.7	2.68 H	171	53.0	-3.7
6	19545.00	38.1 AV	54.0	-15.9	2.68 H	171	41.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	91.9 PK			1.87 V	142	86.8	5.1
2	*6515.00	80.9 AV			1.87 V	142	75.8	5.1
3	#13030.00	47.4 PK	88.2	-40.8	1.81 V	236	35.1	12.3
4	#13030.00	36.9 AV	68.2	-31.3	1.81 V	236	24.6	12.3
5	19545.00	48.7 PK	74.0	-25.3	2.64 V	174	52.4	-3.7
6	19545.00	37.6 AV	54.0	-16.4	2.64 V	174	41.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.7 PK			2.12 H	272	90.8	5.9
2	*6875.00	82.5 AV			2.12 H	272	76.6	5.9
3	#13750.00	48.3 PK	88.2	-39.9	1.79 H	250	34.4	13.9
4	#13750.00	37.5 AV	68.2	-30.7	1.79 H	250	23.6	13.9
5	20625.00	49.2 PK	74.0	-24.8	2.64 H	159	52.5	-3.3
6	20625.00	37.9 AV	54.0	-16.1	2.64 H	159	41.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	91.2 PK			1.86 V	169	85.3	5.9
2	*6875.00	80.0 AV			1.86 V	169	74.1	5.9
3	#13750.00	47.9 PK	88.2	-40.3	1.84 V	245	34.0	13.9
4	#13750.00	37.2 AV	68.2	-31.0	1.84 V	245	23.3	13.9
5	20625.00	49.8 PK	74.0	-24.2	2.63 V	156	53.1	-3.3
6	20625.00	38.2 AV	54.0	-15.8	2.63 V	156	41.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	96.7 PK			2.12 H	276	89.8	6.9
2	*6995.00	82.6 AV			2.12 H	276	75.7	6.9
3	#13990.00	48.1 PK	88.2	-40.1	1.73 H	273	33.6	14.5
4	#13990.00	37.3 AV	68.2	-30.9	1.73 H	273	22.8	14.5
5	20985.00	49.1 PK	74.0	-24.9	2.72 H	168	51.8	-2.7
6	20985.00	37.5 AV	54.0	-16.5	2.72 H	168	40.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	90.9 PK			1.81 V	152	84.0	6.9
2	*6995.00	80.0 AV			1.81 V	152	73.1	6.9
3	#13990.00	47.5 PK	88.2	-40.7	1.76 V	253	33.0	14.5
4	#13990.00	37.0 AV	68.2	-31.2	1.76 V	253	22.5	14.5
5	20985.00	49.0 PK	74.0	-25.0	2.57 V	185	51.7	-2.7
6	20985.00	37.7 AV	54.0	-16.3	2.57 V	185	40.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.6 PK			1.95 H	97	82.1	7.5
2	*7115.00	81.6 AV			1.95 H	97	74.1	7.5
3	#7125.00	54.9 PK	88.2	-33.3	1.95 H	97	47.4	7.5
4	#7125.00	43.7 AV	68.2	-24.5	1.95 H	97	36.2	7.5
5	7250.00	51.1 PK	74.0	-22.9	1.95 H	97	43.4	7.7
6	7250.00	40.6 AV	54.0	-13.4	1.95 H	97	32.9	7.7
7	#14230.00	48.6 PK	88.2	-39.6	1.70 H	259	34.0	14.6
8	#14230.00	37.6 AV	68.2	-30.6	1.70 H	259	23.0	14.6
9	21345.00	48.5 PK	74.0	-25.5	2.63 H	172	50.7	-2.2
10	21345.00	37.3 AV	54.0	-16.7	2.63 H	172	39.5	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	86.9 PK			1.07 V	23	79.4	7.5
2	*7115.00	77.1 AV			1.07 V	23	69.6	7.5
3	#7125.00	55.5 PK	88.2	-32.7	1.07 V	23	48.0	7.5
4	#7125.00	44.2 AV	68.2	-24.0	1.07 V	23	36.7	7.5
5	7250.00	54.6 PK	74.0	-19.4	1.07 V	23	46.9	7.7
6	7250.00	44.2 AV	54.0	-9.8	1.07 V	23	36.5	7.7
7	#14230.00	47.7 PK	88.2	-40.5	1.84 V	248	33.1	14.6
8	#14230.00	37.3 AV	68.2	-30.9	1.84 V	248	22.7	14.6
9	21345.00	49.0 PK	74.0	-25.0	2.62 V	167	51.2	-2.2
10	21345.00	37.8 AV	54.0	-16.2	2.62 V	167	40.0	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.2 PK			2.11 H	286	91.5	4.7
2	*6435.00	84.8 AV			2.11 H	286	80.1	4.7
3	#12870.00	48.1 PK	88.2	-40.1	1.71 H	271	35.3	12.8
4	#12870.00	36.9 AV	68.2	-31.3	1.71 H	271	24.1	12.8
5	19305.00	48.6 PK	74.0	-25.4	2.68 H	177	52.5	-3.9
6	19305.00	37.3 AV	54.0	-16.7	2.68 H	177	41.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	90.4 PK			1.84 V	152	85.7	4.7
2	*6435.00	80.0 AV			1.84 V	152	75.3	4.7
3	#12870.00	47.9 PK	88.2	-40.3	1.75 V	234	35.1	12.8
4	#12870.00	37.2 AV	68.2	-31.0	1.75 V	234	24.4	12.8
5	19305.00	49.0 PK	74.0	-25.0	2.59 V	171	52.9	-3.9
6	19305.00	37.9 AV	54.0	-16.1	2.59 V	171	41.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	95.9 PK			2.06 H	288	90.8	5.1
2	*6515.00	84.8 AV			2.06 H	288	79.7	5.1
3	#13030.00	48.0 PK	88.2	-40.2	1.70 H	267	35.7	12.3
4	#13030.00	37.3 AV	68.2	-30.9	1.70 H	267	25.0	12.3
5	19545.00	49.6 PK	74.0	-24.4	2.68 H	162	53.3	-3.7
6	19545.00	38.0 AV	54.0	-16.0	2.68 H	162	41.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	90.5 PK			1.90 V	154	85.4	5.1
2	*6515.00	80.2 AV			1.90 V	154	75.1	5.1
3	#13030.00	47.9 PK	88.2	-40.3	1.81 V	260	35.6	12.3
4	#13030.00	37.0 AV	68.2	-31.2	1.81 V	260	24.7	12.3
5	19545.00	48.8 PK	74.0	-25.2	2.62 V	176	52.5	-3.7
6	19545.00	37.4 AV	54.0	-16.6	2.62 V	176	41.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.3 PK			2.16 H	279	90.4	5.9
2	*6875.00	84.9 AV			2.16 H	279	79.0	5.9
3	#13750.00	48.2 PK	88.2	-40.0	1.73 H	257	34.3	13.9
4	#13750.00	37.4 AV	68.2	-30.8	1.73 H	257	23.5	13.9
5	20625.00	48.7 PK	74.0	-25.3	2.74 H	158	52.0	-3.3
6	20625.00	37.6 AV	54.0	-16.4	2.74 H	158	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	90.3 PK			1.84 V	148	84.4	5.9
2	*6875.00	79.6 AV			1.84 V	148	73.7	5.9
3	#13750.00	47.5 PK	88.2	-40.7	1.82 V	264	33.6	13.9
4	#13750.00	37.0 AV	68.2	-31.2	1.82 V	264	23.1	13.9
5	20625.00	49.0 PK	74.0	-25.0	2.63 V	159	52.3	-3.3
6	20625.00	37.9 AV	54.0	-16.1	2.63 V	159	41.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.1 PK			2.11 H	94	81.6	7.5
2	*7115.00	80.2 AV			2.11 H	94	72.7	7.5
3	#7125.00	55.2 PK	88.2	-33.0	2.11 H	94	47.7	7.5
4	#7125.00	43.7 AV	68.2	-24.5	2.11 H	94	36.2	7.5
5	7250.00	52.8 PK	74.0	-21.2	2.11 H	94	45.1	7.7
6	7250.00	40.9 AV	54.0	-13.1	2.11 H	94	33.2	7.7
7	#14230.00	48.7 PK	88.2	-39.5	1.74 H	257	34.1	14.6
8	#14230.00	37.5 AV	68.2	-30.7	1.74 H	257	22.9	14.6
9	21345.00	49.0 PK	74.0	-25.0	2.73 H	169	51.2	-2.2
10	21345.00	37.5 AV	54.0	-16.5	2.73 H	169	39.7	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	86.7 PK			1.50 V	45	79.2	7.5
2	*7115.00	76.9 AV			1.50 V	45	69.4	7.5
3	#7125.00	57.1 PK	88.2	-31.1	1.50 V	45	49.6	7.5
4	#7125.00	44.0 AV	68.2	-24.2	1.50 V	45	36.5	7.5
5	7250.00	55.6 PK	74.0	-18.4	1.50 V	45	47.9	7.7
6	7250.00	44.2 AV	54.0	-9.8	1.50 V	45	36.5	7.7
7	#14230.00	47.9 PK	88.2	-40.3	1.82 V	251	33.3	14.6
8	#14230.00	37.0 AV	68.2	-31.2	1.82 V	251	22.4	14.6
9	21345.00	49.5 PK	74.0	-24.5	2.58 V	184	51.7	-2.2
10	21345.00	38.3 AV	54.0	-15.7	2.58 V	184	40.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.8 PK			2.07 H	286	92.1	4.7
2	*6435.00	84.8 AV			2.07 H	286	80.1	4.7
3	#12870.00	47.7 PK	88.2	-40.5	1.74 H	257	34.9	12.8
4	#12870.00	37.1 AV	68.2	-31.1	1.74 H	257	24.3	12.8
5	19305.00	48.7 PK	74.0	-25.3	2.64 H	169	52.6	-3.9
6	19305.00	37.3 AV	54.0	-16.7	2.64 H	169	41.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	92.8 PK			1.66 V	153	88.1	4.7
2	*6435.00	81.4 AV			1.66 V	153	76.7	4.7
3	#12870.00	47.8 PK	88.2	-40.4	1.85 V	262	35.0	12.8
4	#12870.00	36.9 AV	68.2	-31.3	1.85 V	262	24.1	12.8
5	19305.00	49.6 PK	74.0	-24.4	2.55 V	168	53.5	-3.9
6	19305.00	38.1 AV	54.0	-15.9	2.55 V	168	42.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	97.2 PK			2.04 H	287	92.1	5.1
2	*6515.00	85.3 AV			2.04 H	287	80.2	5.1
3	#13030.00	47.4 PK	88.2	-40.8	1.75 H	274	35.1	12.3
4	#13030.00	36.8 AV	68.2	-31.4	1.75 H	274	24.5	12.3
5	19545.00	49.0 PK	74.0	-25.0	2.63 H	151	52.7	-3.7
6	19545.00	37.9 AV	54.0	-16.1	2.63 H	151	41.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	92.5 PK			1.64 V	165	87.4	5.1
2	*6515.00	81.2 AV			1.64 V	165	76.1	5.1
3	#13030.00	46.8 PK	88.2	-41.4	1.83 V	257	34.5	12.3
4	#13030.00	36.4 AV	68.2	-31.8	1.83 V	257	24.1	12.3
5	19545.00	48.6 PK	74.0	-25.4	2.53 V	185	52.3	-3.7
6	19545.00	37.6 AV	54.0	-16.4	2.53 V	185	41.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.6 PK			2.11 H	291	90.7	5.9
2	*6875.00	84.6 AV			2.11 H	291	78.7	5.9
3	#13750.00	48.4 PK	88.2	-39.8	1.78 H	251	34.5	13.9
4	#13750.00	37.3 AV	68.2	-30.9	1.78 H	251	23.4	13.9
5	20625.00	48.8 PK	74.0	-25.2	2.62 H	176	52.1	-3.3
6	20625.00	37.3 AV	54.0	-16.7	2.62 H	176	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	92.6 PK			1.63 V	166	86.7	5.9
2	*6875.00	81.4 AV			1.63 V	166	75.5	5.9
3	#13750.00	47.5 PK	88.2	-40.7	1.85 V	244	33.6	13.9
4	#13750.00	36.7 AV	68.2	-31.5	1.85 V	244	22.8	13.9
5	20625.00	48.5 PK	74.0	-25.5	2.54 V	182	51.8	-3.3
6	20625.00	37.4 AV	54.0	-16.6	2.54 V	182	40.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.6 PK			2.09 H	94	85.1	7.5
2	*7115.00	81.7 AV			2.09 H	94	74.2	7.5
3	#7125.00	62.0 PK	88.2	-26.2	2.09 H	94	54.5	7.5
4	#7125.00	52.5 AV	68.2	-15.7	2.09 H	94	45.0	7.5
5	7250.00	55.1 PK	74.0	-18.9	2.09 H	94	47.4	7.7
6	7250.00	43.7 AV	54.0	-10.3	2.09 H	94	36.0	7.7
7	#14230.00	48.2 PK	88.2	-40.0	1.81 H	258	33.6	14.6
8	#14230.00	37.3 AV	68.2	-30.9	1.81 H	258	22.7	14.6
9	21345.00	49.2 PK	74.0	-24.8	2.70 H	167	51.4	-2.2
10	21345.00	38.0 AV	54.0	-16.0	2.70 H	167	40.2	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.0 PK			1.53 V	45	81.5	7.5
2	*7115.00	78.4 AV			1.53 V	45	70.9	7.5
3	#7125.00	59.6 PK	88.2	-28.6	1.53 V	45	52.1	7.5
4	#7125.00	50.0 AV	68.2	-18.2	1.53 V	45	42.5	7.5
5	7250.00	55.2 PK	74.0	-18.8	1.53 V	45	47.5	7.7
6	7250.00	44.2 AV	54.0	-9.8	1.53 V	45	36.5	7.7
7	#14230.00	47.2 PK	88.2	-41.0	1.80 V	233	32.6	14.6
8	#14230.00	36.5 AV	68.2	-31.7	1.80 V	233	21.9	14.6
9	21345.00	48.7 PK	74.0	-25.3	2.62 V	160	50.9	-2.2
10	21345.00	37.4 AV	54.0	-16.6	2.62 V	160	39.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	98.5 PK			2.12 H	284	93.7	4.8
2	*6465.00	85.7 AV			2.12 H	284	80.9	4.8
3	#12930.00	48.6 PK	88.2	-39.6	1.70 H	269	35.9	12.7
4	#12930.00	37.5 AV	68.2	-30.7	1.70 H	269	24.8	12.7
5	19395.00	48.9 PK	74.0	-25.1	2.68 H	170	52.4	-3.5
6	19395.00	37.8 AV	54.0	-16.2	2.68 H	170	41.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	92.1 PK			1.50 V	152	87.3	4.8
2	*6465.00	80.7 AV			1.50 V	152	75.9	4.8
3	#12930.00	47.6 PK	88.2	-40.6	1.76 V	259	34.9	12.7
4	#12930.00	37.1 AV	68.2	-31.1	1.76 V	259	24.4	12.7
5	19395.00	49.3 PK	74.0	-24.7	2.62 V	182	52.8	-3.5
6	19395.00	37.9 AV	54.0	-16.1	2.62 V	182	41.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	97.9 PK			2.10 H	285	92.5	5.4
2	*6545.00	85.3 AV			2.10 H	285	79.9	5.4
3	#13090.00	47.7 PK	88.2	-40.5	1.75 H	256	35.2	12.5
4	#13090.00	36.9 AV	68.2	-31.3	1.75 H	256	24.4	12.5
5	19635.00	48.7 PK	74.0	-25.3	2.62 H	175	52.7	-4.0
6	19635.00	37.3 AV	54.0	-16.7	2.62 H	175	41.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	91.6 PK			1.48 V	166	86.2	5.4
2	*6545.00	80.4 AV			1.48 V	166	75.0	5.4
3	#13090.00	46.8 PK	88.2	-41.4	1.84 V	243	34.3	12.5
4	#13090.00	36.4 AV	68.2	-31.8	1.84 V	243	23.9	12.5
5	19635.00	48.8 PK	74.0	-25.2	2.64 V	178	52.8	-4.0
6	19635.00	37.5 AV	54.0	-16.5	2.64 V	178	41.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	97.8 PK			2.08 H	283	91.9	5.9
2	*6865.00	85.3 AV			2.08 H	283	79.4	5.9
3	#13730.00	48.1 PK	88.2	-40.1	1.78 H	247	34.1	14.0
4	#13730.00	37.3 AV	68.2	-30.9	1.78 H	247	23.3	14.0
5	20595.00	49.3 PK	74.0	-24.7	2.67 H	176	52.7	-3.4
6	20595.00	38.0 AV	54.0	-16.0	2.67 H	176	41.4	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	91.8 PK			1.53 V	168	85.9	5.9
2	*6865.00	80.4 AV			1.53 V	168	74.5	5.9
3	#13730.00	47.2 PK	88.2	-41.0	1.85 V	246	33.2	14.0
4	#13730.00	36.6 AV	68.2	-31.6	1.85 V	246	22.6	14.0
5	20595.00	49.2 PK	74.0	-24.8	2.58 V	184	52.6	-3.4
6	20595.00	38.0 AV	54.0	-16.0	2.58 V	184	41.4	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	91.6 PK			2.03 H	106	84.7	6.9
2	*7025.00	83.3 AV			2.03 H	106	76.4	6.9
3	#7125.00	56.6 PK	88.2	-31.6	2.03 H	106	49.1	7.5
4	#7125.00	43.9 AV	68.2	-24.3	2.03 H	106	36.4	7.5
5	7250.00	55.8 PK	74.0	-18.2	2.03 H	106	48.1	7.7
6	7250.00	44.1 AV	54.0	-9.9	2.03 H	106	36.4	7.7
7	#14050.00	47.7 PK	88.2	-40.5	1.74 H	266	33.1	14.6
8	#14050.00	36.6 AV	68.2	-31.6	1.74 H	266	22.0	14.6
9	21075.00	48.9 PK	74.0	-25.1	2.66 H	174	51.6	-2.7
10	21075.00	37.6 AV	54.0	-16.4	2.66 H	174	40.3	-2.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	88.8 PK			1.32 V	36	81.9	6.9
2	*7025.00	78.8 AV			1.32 V	36	71.9	6.9
3	#7125.00	55.0 PK	88.2	-33.2	1.32 V	36	47.5	7.5
4	#7125.00	44.0 AV	68.2	-24.2	1.32 V	36	36.5	7.5
5	7250.00	55.3 PK	74.0	-18.7	1.32 V	36	47.6	7.7
6	7250.00	44.2 AV	54.0	-9.8	1.32 V	36	36.5	7.7
7	#14050.00	47.6 PK	88.2	-40.6	1.75 V	253	33.0	14.6
8	#14050.00	37.0 AV	68.2	-31.2	1.75 V	253	22.4	14.6
9	21075.00	48.6 PK	74.0	-25.4	2.56 V	188	51.3	-2.7
10	21075.00	37.4 AV	54.0	-16.6	2.56 V	188	40.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	96.2 PK			2.03 H	87	91.2	5.0
2	*6505.00	83.6 AV			2.03 H	87	78.6	5.0
3	#13010.00	47.7 PK	88.2	-40.5	1.76 H	266	35.4	12.3
4	#13010.00	36.7 AV	68.2	-31.5	1.76 H	266	24.4	12.3
5	19515.00	49.0 PK	74.0	-25.0	2.71 H	166	52.5	-3.5
6	19515.00	37.9 AV	54.0	-16.1	2.71 H	166	41.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	92.1 PK			1.72 V	159	87.1	5.0
2	*6505.00	80.1 AV			1.72 V	159	75.1	5.0
3	#13010.00	47.5 PK	88.2	-40.7	1.83 V	253	35.2	12.3
4	#13010.00	37.1 AV	68.2	-31.1	1.83 V	253	24.8	12.3
5	19515.00	48.9 PK	74.0	-25.1	2.60 V	180	52.4	-3.5
6	19515.00	37.8 AV	54.0	-16.2	2.60 V	180	41.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	95.7 PK			1.99 H	81	89.9	5.8
2	*6825.00	83.1 AV			1.99 H	81	77.3	5.8
3	#13650.00	48.3 PK	88.2	-39.9	1.74 H	262	34.4	13.9
4	#13650.00	37.5 AV	68.2	-30.7	1.74 H	262	23.6	13.9
5	20475.00	49.6 PK	74.0	-24.4	2.72 H	166	52.5	-2.9
6	20475.00	38.0 AV	54.0	-16.0	2.72 H	166	40.9	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	91.8 PK			1.78 V	157	86.0	5.8
2	*6825.00	79.8 AV			1.78 V	157	74.0	5.8
3	#13650.00	47.6 PK	88.2	-40.6	1.85 V	239	33.7	13.9
4	#13650.00	37.0 AV	68.2	-31.2	1.85 V	239	23.1	13.9
5	20475.00	49.0 PK	74.0	-25.0	2.55 V	175	51.9	-2.9
6	20475.00	37.7 AV	54.0	-16.3	2.55 V	175	40.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	91.6 PK			1.96 H	97	84.7	6.9
2	*6985.00	79.8 AV			1.96 H	97	72.9	6.9
3	#7125.00	55.1 PK	88.2	-33.1	1.96 H	97	47.6	7.5
4	#7125.00	44.1 AV	68.2	-24.1	1.96 H	97	36.6	7.5
5	7250.00	54.7 PK	74.0	-19.3	1.96 H	97	47.0	7.7
6	7250.00	43.9 AV	54.0	-10.1	1.96 H	97	36.2	7.7
7	#13970.00	47.7 PK	88.2	-40.5	1.78 H	268	33.3	14.4
8	#13970.00	36.7 AV	68.2	-31.5	1.78 H	268	22.3	14.4
9	20955.00	49.3 PK	74.0	-24.7	2.65 H	163	51.9	-2.6
10	20955.00	37.9 AV	54.0	-16.1	2.65 H	163	40.5	-2.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	87.3 PK			1.08 V	15	80.4	6.9
2	*6985.00	76.5 AV			1.08 V	15	69.6	6.9
3	#7125.00	55.7 PK	88.2	-32.5	1.08 V	15	48.2	7.5
4	#7125.00	44.4 AV	68.2	-23.8	1.08 V	15	36.9	7.5
5	7250.00	55.3 PK	74.0	-18.7	1.08 V	15	47.6	7.7
6	7250.00	44.4 AV	54.0	-9.6	1.08 V	15	36.7	7.7
7	#13970.00	47.9 PK	88.2	-40.3	1.81 V	263	33.5	14.4
8	#13970.00	37.2 AV	68.2	-31.0	1.81 V	263	22.8	14.4
9	20955.00	48.5 PK	74.0	-25.5	2.54 V	168	51.1	-2.6
10	20955.00	37.5 AV	54.0	-16.5	2.54 V	168	40.1	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	97.2 PK			1.99 H	85	92.2	5.0
2	*6505.00	84.1 AV			1.99 H	85	79.1	5.0
3	#13010.00	47.7 PK	88.2	-40.5	1.78 H	269	35.4	12.3
4	#13010.00	37.0 AV	68.2	-31.2	1.78 H	269	24.7	12.3
5	19515.00	49.5 PK	74.0	-24.5	2.65 H	155	53.0	-3.5
6	19515.00	38.0 AV	54.0	-16.0	2.65 H	155	41.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	90.1 PK			1.52 V	32	85.1	5.0
2	*6505.00	79.2 AV			1.52 V	32	74.2	5.0
3	#13010.00	47.9 PK	88.2	-40.3	1.77 V	251	35.6	12.3
4	#13010.00	37.1 AV	68.2	-31.1	1.77 V	251	24.8	12.3
5	19515.00	49.4 PK	74.0	-24.6	2.55 V	183	52.9	-3.5
6	19515.00	38.1 AV	54.0	-15.9	2.55 V	183	41.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	96.9 PK			2.04 H	89	91.1	5.8
2	*6825.00	84.0 AV			2.04 H	89	78.2	5.8
3	#13650.00	48.4 PK	88.2	-39.8	1.76 H	268	34.5	13.9
4	#13650.00	37.3 AV	68.2	-30.9	1.76 H	268	23.4	13.9
5	20475.00	49.0 PK	74.0	-25.0	2.63 H	166	51.9	-2.9
6	20475.00	37.9 AV	54.0	-16.1	2.63 H	166	40.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	89.7 PK			1.50 V	24	83.9	5.8
2	*6825.00	79.0 AV			1.50 V	24	73.2	5.8
3	#13650.00	47.1 PK	88.2	-41.1	1.83 V	259	33.2	13.9
4	#13650.00	36.4 AV	68.2	-31.8	1.83 V	259	22.5	13.9
5	20475.00	49.0 PK	74.0	-25.0	2.61 V	161	51.9	-2.9
6	20475.00	37.8 AV	54.0	-16.2	2.61 V	161	40.7	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	91.0 PK			1.96 H	100	84.1	6.9
2	*6985.00	79.6 AV			1.96 H	100	72.7	6.9
3	#7125.00	55.8 PK	88.2	-32.4	1.96 H	100	48.3	7.5
4	#7125.00	44.2 AV	68.2	-24.0	1.96 H	100	36.7	7.5
5	7250.00	56.4 PK	74.0	-17.6	1.96 H	100	48.7	7.7
6	7250.00	45.1 AV	54.0	-8.9	1.96 H	100	37.4	7.7
7	#13970.00	48.0 PK	88.2	-40.2	1.70 H	273	33.6	14.4
8	#13970.00	37.1 AV	68.2	-31.1	1.70 H	273	22.7	14.4
9	20955.00	48.7 PK	74.0	-25.3	2.67 H	158	51.3	-2.6
10	20955.00	37.6 AV	54.0	-16.4	2.67 H	158	40.2	-2.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	85.9 PK			1.52 V	274	79.0	6.9
2	*6985.00	74.4 AV			1.52 V	274	67.5	6.9
3	#7125.00	55.8 PK	88.2	-32.4	1.52 V	274	48.3	7.5
4	#7125.00	44.2 AV	68.2	-24.0	1.52 V	274	36.7	7.5
5	7250.00	55.1 PK	74.0	-18.9	1.52 V	274	47.4	7.7
6	7250.00	44.2 AV	54.0	-9.8	1.52 V	274	36.5	7.7
7	#13970.00	47.8 PK	88.2	-40.4	1.83 V	264	33.4	14.4
8	#13970.00	37.1 AV	68.2	-31.1	1.83 V	264	22.7	14.4
9	20955.00	48.6 PK	74.0	-25.4	2.59 V	164	51.2	-2.6
10	20955.00	37.4 AV	54.0	-16.6	2.59 V	164	40.0	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B_2TX

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	88.9 PK			1.00 H	291	84.2	4.7
2	*6435.00	79.9 AV			1.00 H	291	75.2	4.7
3	#12870.00	47.5 PK	88.2	-40.7	1.63 H	256	34.7	12.8
4	#12870.00	37.3 AV	68.2	-30.9	1.63 H	256	24.5	12.8
5	19305.00	48.4 PK	74.0	-25.6	2.63 H	142	52.3	-3.9
6	19305.00	37.4 AV	54.0	-16.6	2.63 H	142	41.3	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	90.7 PK			1.62 V	311	86.0	4.7
2	*6435.00	81.5 AV			1.62 V	311	76.8	4.7
3	#12870.00	45.7 PK	88.2	-42.5	1.83 V	275	32.9	12.8
4	#12870.00	35.6 AV	68.2	-32.6	1.83 V	275	22.8	12.8
5	19305.00	50.1 PK	74.0	-23.9	2.53 V	177	54.0	-3.9
6	19305.00	38.8 AV	54.0	-15.2	2.53 V	177	42.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	88.6 PK			1.05 H	297	83.7	4.9
2	*6475.00	79.9 AV			1.05 H	297	75.0	4.9
3	#12950.00	47.6 PK	88.2	-40.6	1.70 H	269	35.1	12.5
4	#12950.00	37.1 AV	68.2	-31.1	1.70 H	269	24.6	12.5
5	19425.00	48.3 PK	74.0	-25.7	2.58 H	145	51.8	-3.5
6	19425.00	37.1 AV	54.0	-16.9	2.58 H	145	40.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	90.2 PK			1.61 V	312	85.3	4.9
2	*6475.00	81.0 AV			1.61 V	312	76.1	4.9
3	#12950.00	46.1 PK	88.2	-42.1	1.84 V	273	33.6	12.5
4	#12950.00	35.8 AV	68.2	-32.4	1.84 V	273	23.3	12.5
5	19425.00	49.6 PK	74.0	-24.4	2.59 V	164	53.1	-3.5
6	19425.00	38.4 AV	54.0	-15.6	2.59 V	164	41.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	89.0 PK			1.04 H	303	83.9	5.1
2	*6515.00	79.9 AV			1.04 H	303	74.8	5.1
3	#13030.00	48.0 PK	88.2	-40.2	1.67 H	265	35.7	12.3
4	#13030.00	38.0 AV	68.2	-30.2	1.67 H	265	25.7	12.3
5	19545.00	48.1 PK	74.0	-25.9	2.57 H	136	51.8	-3.7
6	19545.00	37.1 AV	54.0	-16.9	2.57 H	136	40.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	90.5 PK			1.67 V	306	85.4	5.1
2	*6515.00	81.5 AV			1.67 V	306	76.4	5.1
3	#13030.00	46.4 PK	88.2	-41.8	1.83 V	282	34.1	12.3
4	#13030.00	36.2 AV	68.2	-32.0	1.83 V	282	23.9	12.3
5	19545.00	49.8 PK	74.0	-24.2	2.61 V	156	53.5	-3.7
6	19545.00	38.6 AV	54.0	-15.4	2.61 V	156	42.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	89.2 PK			1.04 H	297	83.3	5.9
2	*6875.00	80.3 AV			1.04 H	297	74.4	5.9
3	#13750.00	47.4 PK	88.2	-40.8	1.61 H	275	33.5	13.9
4	#13750.00	37.3 AV	68.2	-30.9	1.61 H	275	23.4	13.9
5	20625.00	48.7 PK	74.0	-25.3	2.57 H	161	52.0	-3.3
6	20625.00	37.3 AV	54.0	-16.7	2.57 H	161	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	91.1 PK			1.66 V	299	85.2	5.9
2	*6875.00	81.9 AV			1.66 V	299	76.0	5.9
3	#13750.00	45.8 PK	88.2	-42.4	1.88 V	282	31.9	13.9
4	#13750.00	35.7 AV	68.2	-32.5	1.88 V	282	21.8	13.9
5	20625.00	49.7 PK	74.0	-24.3	2.54 V	178	53.0	-3.3
6	20625.00	38.8 AV	54.0	-15.2	2.54 V	178	42.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	88.3 PK			1.00 H	302	81.4	6.9
2	*6995.00	79.5 AV			1.00 H	302	72.6	6.9
3	#13990.00	47.2 PK	88.2	-41.0	1.67 H	269	32.7	14.5
4	#13990.00	37.1 AV	68.2	-31.1	1.67 H	269	22.6	14.5
5	20985.00	49.1 PK	74.0	-24.9	2.66 H	150	51.8	-2.7
6	20985.00	37.7 AV	54.0	-16.3	2.66 H	150	40.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	90.6 PK			1.65 V	316	83.7	6.9
2	*6995.00	81.6 AV			1.65 V	316	74.7	6.9
3	#13990.00	46.1 PK	88.2	-42.1	1.81 V	280	31.6	14.5
4	#13990.00	36.0 AV	68.2	-32.2	1.81 V	280	21.5	14.5
5	20985.00	49.9 PK	74.0	-24.1	2.54 V	169	52.6	-2.7
6	20985.00	38.5 AV	54.0	-15.5	2.54 V	169	41.2	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	83.3 PK			2.16 H	339	75.8	7.5
2	*7115.00	76.5 AV			2.16 H	339	69.0	7.5
3	#7125.00	55.2 PK	88.2	-33.0	2.16 H	339	47.7	7.5
4	#7125.00	44.2 AV	68.2	-24.0	2.16 H	339	36.7	7.5
5	7250.00	55.8 PK	74.0	-18.2	2.16 H	339	48.1	7.7
6	7250.00	44.4 AV	54.0	-9.6	2.16 H	339	36.7	7.7
7	#14230.00	47.7 PK	88.2	-40.5	1.67 H	267	33.1	14.6
8	#14230.00	37.7 AV	68.2	-30.5	1.67 H	267	23.1	14.6
9	21345.00	48.7 PK	74.0	-25.3	2.64 H	145	50.9	-2.2
10	21345.00	37.7 AV	54.0	-16.3	2.64 H	145	39.9	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	85.9 PK			1.00 V	14	78.4	7.5
2	*7115.00	78.0 AV			1.00 V	14	70.5	7.5
3	#7125.00	55.5 PK	88.2	-32.7	1.00 V	14	48.0	7.5
4	#7125.00	44.2 AV	68.2	-24.0	1.00 V	14	36.7	7.5
5	7250.00	55.0 PK	74.0	-19.0	1.00 V	14	47.3	7.7
6	7250.00	44.2 AV	54.0	-9.8	1.00 V	14	36.5	7.7
7	#14230.00	46.2 PK	88.2	-42.0	1.88 V	268	31.6	14.6
8	#14230.00	36.1 AV	68.2	-32.1	1.88 V	268	21.5	14.6
9	21345.00	49.8 PK	74.0	-24.2	2.57 V	152	52.0	-2.2
10	21345.00	38.6 AV	54.0	-15.4	2.57 V	152	40.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	94.5 PK			2.10 H	308	89.8	4.7
2	*6435.00	82.9 AV			2.10 H	308	78.2	4.7
3	#12870.00	47.9 PK	88.2	-40.3	1.63 H	277	35.1	12.8
4	#12870.00	37.6 AV	68.2	-30.6	1.63 H	277	24.8	12.8
5	19305.00	48.6 PK	74.0	-25.4	2.64 H	156	52.5	-3.9
6	19305.00	37.3 AV	54.0	-16.7	2.64 H	156	41.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.2 PK			1.46 V	312	88.5	4.7
2	*6435.00	84.8 AV			1.46 V	312	80.1	4.7
3	#12870.00	46.9 PK	88.2	-41.3	1.90 V	271	34.1	12.8
4	#12870.00	36.4 AV	68.2	-31.8	1.90 V	271	23.6	12.8
5	19305.00	50.0 PK	74.0	-24.0	2.54 V	154	53.9	-3.9
6	19305.00	38.7 AV	54.0	-15.3	2.54 V	154	42.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	94.4 PK			2.12 H	307	89.5	4.9
2	*6475.00	82.8 AV			2.12 H	307	77.9	4.9
3	#12950.00	48.0 PK	88.2	-40.2	1.65 H	271	35.5	12.5
4	#12950.00	37.9 AV	68.2	-30.3	1.65 H	271	25.4	12.5
5	19425.00	47.8 PK	74.0	-26.2	2.60 H	160	51.3	-3.5
6	19425.00	36.9 AV	54.0	-17.1	2.60 H	160	40.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	93.0 PK			1.50 V	322	88.1	4.9
2	*6475.00	84.5 AV			1.50 V	322	79.6	4.9
3	#12950.00	45.9 PK	88.2	-42.3	1.87 V	286	33.4	12.5
4	#12950.00	35.6 AV	68.2	-32.6	1.87 V	286	23.1	12.5
5	19425.00	49.3 PK	74.0	-24.7	2.55 V	164	52.8	-3.5
6	19425.00	38.2 AV	54.0	-15.8	2.55 V	164	41.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	94.2 PK			2.10 H	310	89.1	5.1
2	*6515.00	82.7 AV			2.10 H	310	77.6	5.1
3	#13030.00	48.2 PK	88.2	-40.0	1.64 H	265	35.9	12.3
4	#13030.00	38.1 AV	68.2	-30.1	1.64 H	265	25.8	12.3
5	19545.00	48.5 PK	74.0	-25.5	2.61 H	163	52.2	-3.7
6	19545.00	37.3 AV	54.0	-16.7	2.61 H	163	41.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	93.5 PK			1.45 V	308	88.4	5.1
2	*6515.00	85.1 AV			1.45 V	308	80.0	5.1
3	#13030.00	46.9 PK	88.2	-41.3	1.81 V	277	34.6	12.3
4	#13030.00	36.4 AV	68.2	-31.8	1.81 V	277	24.1	12.3
5	19545.00	49.1 PK	74.0	-24.9	2.62 V	167	52.8	-3.7
6	19545.00	38.1 AV	54.0	-15.9	2.62 V	167	41.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	94.7 PK			2.05 H	309	88.8	5.9
2	*6875.00	83.1 AV			2.05 H	309	77.2	5.9
3	#13750.00	48.0 PK	88.2	-40.2	1.62 H	275	34.1	13.9
4	#13750.00	38.0 AV	68.2	-30.2	1.62 H	275	24.1	13.9
5	20625.00	47.5 PK	74.0	-26.5	2.58 H	161	50.8	-3.3
6	20625.00	36.6 AV	54.0	-17.4	2.58 H	161	39.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	93.7 PK			1.51 V	326	87.8	5.9
2	*6875.00	85.3 AV			1.51 V	326	79.4	5.9
3	#13750.00	47.6 PK	88.2	-40.6	1.81 V	282	33.7	13.9
4	#13750.00	36.9 AV	68.2	-31.3	1.81 V	282	23.0	13.9
5	20625.00	48.8 PK	74.0	-25.2	2.65 V	162	52.1	-3.3
6	20625.00	38.0 AV	54.0	-16.0	2.65 V	162	41.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	94.1 PK			2.13 H	301	87.2	6.9
2	*6995.00	82.5 AV			2.13 H	301	75.6	6.9
3	#13990.00	47.8 PK	88.2	-40.4	1.68 H	274	33.3	14.5
4	#13990.00	37.8 AV	68.2	-30.4	1.68 H	274	23.3	14.5
5	20985.00	47.6 PK	74.0	-26.4	2.63 H	160	50.3	-2.7
6	20985.00	36.5 AV	54.0	-17.5	2.63 H	160	39.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	92.9 PK			1.50 V	302	86.0	6.9
2	*6995.00	84.6 AV			1.50 V	302	77.7	6.9
3	#13990.00	47.3 PK	88.2	-40.9	1.77 V	282	32.8	14.5
4	#13990.00	36.9 AV	68.2	-31.3	1.77 V	282	22.4	14.5
5	20985.00	49.1 PK	74.0	-24.9	2.68 V	172	51.8	-2.7
6	20985.00	38.2 AV	54.0	-15.8	2.68 V	172	40.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.3 PK			2.03 H	260	81.8	7.5
2	*7115.00	80.5 AV			2.03 H	260	73.0	7.5
3	#7125.00	59.2 PK	88.2	-29.0	2.03 H	260	51.7	7.5
4	#7125.00	50.3 AV	68.2	-17.9	2.03 H	260	42.8	7.5
5	7250.00	55.7 PK	74.0	-18.3	2.03 H	260	48.0	7.7
6	7250.00	45.6 AV	54.0	-8.4	2.03 H	260	37.9	7.7
7	#14230.00	47.9 PK	88.2	-40.3	1.66 H	276	33.3	14.6
8	#14230.00	37.9 AV	68.2	-30.3	1.66 H	276	23.3	14.6
9	21345.00	47.6 PK	74.0	-26.4	2.57 H	169	49.8	-2.2
10	21345.00	36.8 AV	54.0	-17.2	2.57 H	169	39.0	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	88.0 PK			1.95 V	12	80.5	7.5
2	*7115.00	79.5 AV			1.95 V	12	72.0	7.5
3	#7125.00	58.6 PK	88.2	-29.6	1.95 V	12	51.1	7.5
4	#7125.00	50.0 AV	68.2	-18.2	1.95 V	12	42.5	7.5
5	7250.00	54.9 PK	74.0	-19.1	1.95 V	12	47.2	7.7
6	7250.00	44.1 AV	54.0	-9.9	1.95 V	12	36.4	7.7
7	#14230.00	46.9 PK	88.2	-41.3	1.76 V	274	32.3	14.6
8	#14230.00	36.2 AV	68.2	-32.0	1.76 V	274	21.6	14.6
9	21345.00	49.1 PK	74.0	-24.9	2.58 V	166	51.3	-2.2
10	21345.00	38.3 AV	54.0	-15.7	2.58 V	166	40.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	91.6 PK			1.06 H	285	86.9	4.7
2	*6445.00	81.2 AV			1.06 H	285	76.5	4.7
3	#12890.00	48.5 PK	88.2	-39.7	1.59 H	282	35.6	12.9
4	#12890.00	38.2 AV	68.2	-30.0	1.59 H	282	25.3	12.9
5	19335.00	48.1 PK	74.0	-25.9	2.61 H	149	51.8	-3.7
6	19335.00	37.0 AV	54.0	-17.0	2.61 H	149	40.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	92.8 PK			1.51 V	313	88.1	4.7
2	*6445.00	81.1 AV			1.51 V	313	76.4	4.7
3	#12890.00	46.4 PK	88.2	-41.8	1.79 V	282	33.5	12.9
4	#12890.00	35.9 AV	68.2	-32.3	1.79 V	282	23.0	12.9
5	19335.00	49.8 PK	74.0	-24.2	2.66 V	182	53.5	-3.7
6	19335.00	38.5 AV	54.0	-15.5	2.66 V	182	42.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	92.0 PK			1.08 H	271	87.1	4.9
2	*6485.00	81.7 AV			1.08 H	271	76.8	4.9
3	#12970.00	47.5 PK	88.2	-40.7	1.61 H	287	35.0	12.5
4	#12970.00	37.4 AV	68.2	-30.8	1.61 H	287	24.9	12.5
5	19455.00	47.9 PK	74.0	-26.1	2.57 H	167	51.3	-3.4
6	19455.00	36.8 AV	54.0	-17.2	2.57 H	167	40.2	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	92.8 PK			1.48 V	325	87.9	4.9
2	*6485.00	80.9 AV			1.48 V	325	76.0	4.9
3	#12970.00	46.8 PK	88.2	-41.4	1.87 V	285	34.3	12.5
4	#12970.00	36.0 AV	68.2	-32.2	1.87 V	285	23.5	12.5
5	19455.00	48.9 PK	74.0	-25.1	2.64 V	155	52.3	-3.4
6	19455.00	37.7 AV	54.0	-16.3	2.64 V	155	41.1	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	91.8 PK			1.01 H	274	86.6	5.2
2	*6525.00	81.2 AV			1.01 H	274	76.0	5.2
3	#13050.00	47.6 PK	88.2	-40.6	1.65 H	259	35.1	12.5
4	#13050.00	37.5 AV	68.2	-30.7	1.65 H	259	25.0	12.5
5	19575.00	47.5 PK	74.0	-26.5	2.61 H	166	51.3	-3.8
6	19575.00	36.8 AV	54.0	-17.2	2.61 H	166	40.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	92.5 PK			1.49 V	310	87.3	5.2
2	*6525.00	81.0 AV			1.49 V	310	75.8	5.2
3	#13050.00	46.3 PK	88.2	-41.9	1.77 V	288	33.8	12.5
4	#13050.00	36.0 AV	68.2	-32.2	1.77 V	288	23.5	12.5
5	19575.00	49.1 PK	74.0	-24.9	2.71 V	195	52.9	-3.8
6	19575.00	38.0 AV	54.0	-16.0	2.71 V	195	41.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	91.3 PK			1.10 H	298	85.4	5.9
2	*6885.00	81.2 AV			1.10 H	298	75.3	5.9
3	#13770.00	48.1 PK	88.2	-40.1	1.59 H	262	34.0	14.1
4	#13770.00	37.9 AV	68.2	-30.3	1.59 H	262	23.8	14.1
5	20655.00	47.9 PK	74.0	-26.1	2.55 H	144	51.1	-3.2
6	20655.00	37.0 AV	54.0	-17.0	2.55 H	144	40.2	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	92.9 PK			1.51 V	319	87.0	5.9
2	*6885.00	81.4 AV			1.51 V	319	75.5	5.9
3	#13770.00	46.6 PK	88.2	-41.6	1.76 V	290	32.5	14.1
4	#13770.00	36.1 AV	68.2	-32.1	1.76 V	290	22.0	14.1
5	20655.00	49.5 PK	74.0	-24.5	2.70 V	184	52.7	-3.2
6	20655.00	38.5 AV	54.0	-15.5	2.70 V	184	41.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	91.1 PK			1.12 H	278	84.3	6.8
2	*6965.00	80.8 AV			1.12 H	278	74.0	6.8
3	#13930.00	47.4 PK	88.2	-40.8	1.64 H	271	33.3	14.1
4	#13930.00	37.4 AV	68.2	-30.8	1.64 H	271	23.3	14.1
5	20895.00	48.0 PK	74.0	-26.0	2.56 H	162	50.6	-2.6
6	20895.00	37.1 AV	54.0	-16.9	2.56 H	162	39.7	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	93.2 PK			1.46 V	324	86.4	6.8
2	*6965.00	81.4 AV			1.46 V	324	74.6	6.8
3	#13930.00	46.5 PK	88.2	-41.7	1.82 V	291	32.4	14.1
4	#13930.00	35.8 AV	68.2	-32.4	1.82 V	291	21.7	14.1
5	20895.00	49.7 PK	74.0	-24.3	2.69 V	194	52.3	-2.6
6	20895.00	38.3 AV	54.0	-15.7	2.69 V	194	40.9	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	89.9 PK			2.05 H	302	82.5	7.4
2	*7085.00	81.5 AV			2.05 H	302	74.1	7.4
3	#7125.00	55.3 PK	88.2	-32.9	2.05 H	302	47.8	7.5
4	#7125.00	44.3 AV	68.2	-23.9	2.05 H	302	36.8	7.5
5	7250.00	54.7 PK	74.0	-19.3	2.05 H	302	47.0	7.7
6	7250.00	44.9 AV	54.0	-9.1	2.05 H	302	37.2	7.7
7	#14170.00	48.1 PK	88.2	-40.1	1.66 H	278	33.6	14.5
8	#14170.00	37.7 AV	68.2	-30.5	1.66 H	278	23.2	14.5
9	21255.00	47.1 PK	74.0	-26.9	2.57 H	159	49.5	-2.4
10	21255.00	36.4 AV	54.0	-17.6	2.57 H	159	38.8	-2.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	89.8 PK			1.97 V	295	82.4	7.4
2	*7085.00	81.5 AV			1.97 V	295	74.1	7.4
3	#7125.00	53.8 PK	88.2	-34.4	1.97 V	295	46.3	7.5
4	#7125.00	44.1 AV	68.2	-24.1	1.97 V	295	36.6	7.5
5	7250.00	55.2 PK	74.0	-18.8	1.97 V	295	47.5	7.7
6	7250.00	44.5 AV	54.0	-9.5	1.97 V	295	36.8	7.7
7	#14170.00	46.5 PK	88.2	-41.7	1.74 V	296	32.0	14.5
8	#14170.00	35.9 AV	68.2	-32.3	1.74 V	296	21.4	14.5
9	21255.00	50.4 PK	74.0	-23.6	2.62 V	170	52.8	-2.4
10	21255.00	38.8 AV	54.0	-15.2	2.62 V	170	41.2	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	92.0 PK			1.97 H	308	87.2	4.8
2	*6465.00	82.5 AV			1.97 H	308	77.7	4.8
3	#12930.00	48.0 PK	88.2	-40.2	1.71 H	270	35.3	12.7
4	#12930.00	38.0 AV	68.2	-30.2	1.71 H	270	25.3	12.7
5	19395.00	47.9 PK	74.0	-26.1	2.65 H	173	51.4	-3.5
6	19395.00	36.9 AV	54.0	-17.1	2.65 H	173	40.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	94.6 PK			1.51 V	307	89.8	4.8
2	*6465.00	81.6 AV			1.51 V	307	76.8	4.8
3	#12930.00	45.9 PK	88.2	-42.3	1.85 V	275	33.2	12.7
4	#12930.00	35.6 AV	68.2	-32.6	1.85 V	275	22.9	12.7
5	19395.00	50.0 PK	74.0	-24.0	2.64 V	175	53.5	-3.5
6	19395.00	38.9 AV	54.0	-15.1	2.64 V	175	42.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	91.6 PK			1.93 H	312	86.2	5.4
2	*6545.00	82.0 AV			1.93 H	312	76.6	5.4
3	#13090.00	47.4 PK	88.2	-40.8	1.65 H	276	34.9	12.5
4	#13090.00	37.5 AV	68.2	-30.7	1.65 H	276	25.0	12.5
5	19635.00	48.4 PK	74.0	-25.6	2.55 H	144	52.4	-4.0
6	19635.00	37.3 AV	54.0	-16.7	2.55 H	144	41.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	94.4 PK			1.54 V	303	89.0	5.4
2	*6545.00	81.5 AV			1.54 V	303	76.1	5.4
3	#13090.00	46.9 PK	88.2	-41.3	1.74 V	284	34.4	12.5
4	#13090.00	36.1 AV	68.2	-32.1	1.74 V	284	23.6	12.5
5	19635.00	49.8 PK	74.0	-24.2	2.70 V	195	53.8	-4.0
6	19635.00	38.8 AV	54.0	-15.2	2.70 V	195	42.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	91.3 PK			1.94 H	304	85.4	5.9
2	*6865.00	82.1 AV			1.94 H	304	76.2	5.9
3	#13730.00	47.8 PK	88.2	-40.4	1.62 H	267	33.8	14.0
4	#13730.00	37.7 AV	68.2	-30.5	1.62 H	267	23.7	14.0
5	20595.00	47.2 PK	74.0	-26.8	2.59 H	155	50.6	-3.4
6	20595.00	36.4 AV	54.0	-17.6	2.59 H	155	39.8	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	94.6 PK			1.52 V	315	88.7	5.9
2	*6865.00	81.9 AV			1.52 V	315	76.0	5.9
3	#13730.00	46.3 PK	88.2	-41.9	1.79 V	297	32.3	14.0
4	#13730.00	36.1 AV	68.2	-32.1	1.79 V	297	22.1	14.0
5	20595.00	49.9 PK	74.0	-24.1	2.67 V	173	53.3	-3.4
6	20595.00	38.5 AV	54.0	-15.5	2.67 V	173	41.9	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	92.0 PK			2.01 H	303	85.3	6.7
2	*6945.00	82.5 AV			2.01 H	303	75.8	6.7
3	#13890.00	47.9 PK	88.2	-40.3	1.60 H	281	33.9	14.0
4	#13890.00	37.7 AV	68.2	-30.5	1.60 H	281	23.7	14.0
5	20835.00	47.8 PK	74.0	-26.2	2.60 H	156	50.5	-2.7
6	20835.00	37.1 AV	54.0	-16.9	2.60 H	156	39.8	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	94.8 PK			1.53 V	302	88.1	6.7
2	*6945.00	81.6 AV			1.53 V	302	74.9	6.7
3	#13890.00	46.1 PK	88.2	-42.1	1.73 V	295	32.1	14.0
4	#13890.00	36.1 AV	68.2	-32.1	1.73 V	295	22.1	14.0
5	20835.00	49.3 PK	74.0	-24.7	2.72 V	186	52.0	-2.7
6	20835.00	38.2 AV	54.0	-15.8	2.72 V	186	40.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	85.8 PK			1.99 H	283	78.9	6.9
2	*7025.00	79.0 AV			1.99 H	283	72.1	6.9
3	#7125.00	56.2 PK	88.2	-32.0	1.99 H	283	48.7	7.5
4	#7125.00	44.5 AV	68.2	-23.7	1.99 H	283	37.0	7.5
5	7250.00	55.7 PK	74.0	-18.3	1.99 H	283	48.0	7.7
6	7250.00	43.1 AV	54.0	-10.9	1.99 H	283	35.4	7.7
7	#14050.00	48.4 PK	88.2	-39.8	1.60 H	277	33.8	14.6
8	#14050.00	38.3 AV	68.2	-29.9	1.60 H	277	23.7	14.6
9	21075.00	47.9 PK	74.0	-26.1	2.59 H	158	50.6	-2.7
10	21075.00	37.0 AV	54.0	-17.0	2.59 H	158	39.7	-2.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	87.6 PK			1.79 V	14	80.7	6.9
2	*7025.00	78.9 AV			1.79 V	14	72.0	6.9
3	#7125.00	55.3 PK	88.2	-32.9	1.79 V	14	47.8	7.5
4	#7125.00	44.3 AV	68.2	-23.9	1.79 V	14	36.8	7.5
5	7250.00	55.6 PK	74.0	-18.4	1.79 V	14	47.9	7.7
6	7250.00	44.2 AV	54.0	-9.8	1.79 V	14	36.5	7.7
7	#14050.00	46.3 PK	88.2	-41.9	1.77 V	306	31.7	14.6
8	#14050.00	36.3 AV	68.2	-31.9	1.77 V	306	21.7	14.6
9	21075.00	49.5 PK	74.0	-24.5	2.73 V	185	52.2	-2.7
10	21075.00	38.6 AV	54.0	-15.4	2.73 V	185	41.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	91.2 PK			1.97 H	293	86.2	5.0
2	*6505.00	80.3 AV			1.97 H	293	75.3	5.0
3	#13010.00	48.4 PK	88.2	-39.8	1.65 H	263	36.1	12.3
4	#13010.00	38.1 AV	68.2	-30.1	1.65 H	263	25.8	12.3
5	19515.00	47.9 PK	74.0	-26.1	2.66 H	150	51.4	-3.5
6	19515.00	36.8 AV	54.0	-17.2	2.66 H	150	40.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	90.6 PK			1.50 V	317	85.6	5.0
2	*6505.00	80.3 AV			1.50 V	317	75.3	5.0
3	#13010.00	45.7 PK	88.2	-42.5	1.72 V	287	33.4	12.3
4	#13010.00	35.9 AV	68.2	-32.3	1.72 V	287	23.6	12.3
5	19515.00	49.9 PK	74.0	-24.1	2.78 V	190	53.4	-3.5
6	19515.00	38.6 AV	54.0	-15.4	2.78 V	190	42.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	90.8 PK			1.94 H	305	85.0	5.8
2	*6825.00	80.0 AV			1.94 H	305	74.2	5.8
3	#13650.00	48.2 PK	88.2	-40.0	1.61 H	273	34.3	13.9
4	#13650.00	38.0 AV	68.2	-30.2	1.61 H	273	24.1	13.9
5	20475.00	47.6 PK	74.0	-26.4	2.58 H	174	50.5	-2.9
6	20475.00	36.5 AV	54.0	-17.5	2.58 H	174	39.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	90.3 PK			1.56 V	318	84.5	5.8
2	*6825.00	80.0 AV			1.56 V	318	74.2	5.8
3	#13650.00	45.8 PK	88.2	-42.4	1.68 V	295	31.9	13.9
4	#13650.00	35.6 AV	68.2	-32.6	1.68 V	295	21.7	13.9
5	20475.00	49.0 PK	74.0	-25.0	2.69 V	201	51.9	-2.9
6	20475.00	37.7 AV	54.0	-16.3	2.69 V	201	40.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	88.8 PK			2.01 H	290	81.9	6.9
2	*6985.00	75.7 AV			2.01 H	290	68.8	6.9
3	#7125.00	55.6 PK	88.2	-32.6	2.01 H	290	48.1	7.5
4	#7125.00	44.6 AV	68.2	-23.6	2.01 H	290	37.1	7.5
5	7250.00	53.7 PK	74.0	-20.3	2.01 H	290	46.0	7.7
6	7250.00	43.2 AV	54.0	-10.8	2.01 H	290	35.5	7.7
7	#13970.00	48.0 PK	88.2	-40.2	1.61 H	260	33.6	14.4
8	#13970.00	37.7 AV	68.2	-30.5	1.61 H	260	23.3	14.4
9	20955.00	48.0 PK	74.0	-26.0	2.59 H	166	50.6	-2.6
10	20955.00	37.2 AV	54.0	-16.8	2.59 H	166	39.8	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	87.9 PK			1.65 V	313	81.0	6.9
2	*6985.00	76.5 AV			1.65 V	313	69.6	6.9
3	#7125.00	55.1 PK	88.2	-33.1	1.65 V	313	47.6	7.5
4	#7125.00	44.4 AV	68.2	-23.8	1.65 V	313	36.9	7.5
5	7250.00	55.3 PK	74.0	-18.7	1.65 V	313	47.6	7.7
6	7250.00	44.5 AV	54.0	-9.5	1.65 V	313	36.8	7.7
7	#13970.00	46.1 PK	88.2	-42.1	1.78 V	299	31.7	14.4
8	#13970.00	35.9 AV	68.2	-32.3	1.78 V	299	21.5	14.4
9	20955.00	48.6 PK	74.0	-25.4	2.68 V	198	51.2	-2.6
10	20955.00	37.7 AV	54.0	-16.3	2.68 V	198	40.3	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.2 PK			1.34 H	288	88.5	4.7
2	*6435.00	80.2 AV			1.34 H	288	75.5	4.7
3	#12870.00	48.1 PK	88.2	-40.1	1.60 H	278	35.3	12.8
4	#12870.00	37.4 AV	68.2	-30.8	1.60 H	278	24.6	12.8
5	19305.00	49.1 PK	74.0	-24.9	2.58 H	145	53.0	-3.9
6	19305.00	37.9 AV	54.0	-16.1	2.58 H	145	41.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	94.3 PK			1.65 V	310	89.6	4.7
2	*6435.00	81.4 AV			1.65 V	310	76.7	4.7
3	#12870.00	47.7 PK	88.2	-40.5	1.89 V	258	34.9	12.8
4	#12870.00	37.0 AV	68.2	-31.2	1.89 V	258	24.2	12.8
5	19305.00	50.3 PK	74.0	-23.7	2.59 V	151	54.2	-3.9
6	19305.00	38.5 AV	54.0	-15.5	2.59 V	151	42.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	93.1 PK			1.34 H	279	88.2	4.9
2	*6475.00	80.3 AV			1.34 H	279	75.4	4.9
3	#12950.00	48.0 PK	88.2	-40.2	1.65 H	265	35.5	12.5
4	#12950.00	37.3 AV	68.2	-30.9	1.65 H	265	24.8	12.5
5	19425.00	49.1 PK	74.0	-24.9	2.62 H	128	52.6	-3.5
6	19425.00	37.9 AV	54.0	-16.1	2.62 H	128	41.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	93.6 PK			1.62 V	301	88.7	4.9
2	*6475.00	81.0 AV			1.62 V	301	76.1	4.9
3	#12950.00	47.9 PK	88.2	-40.3	1.91 V	249	35.4	12.5
4	#12950.00	37.2 AV	68.2	-31.0	1.91 V	249	24.7	12.5
5	19425.00	50.2 PK	74.0	-23.8	2.64 V	171	53.7	-3.5
6	19425.00	38.5 AV	54.0	-15.5	2.64 V	171	42.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	93.5 PK			1.36 H	274	88.4	5.1
2	*6515.00	80.4 AV			1.36 H	274	75.3	5.1
3	#13030.00	48.8 PK	88.2	-39.4	1.62 H	268	36.5	12.3
4	#13030.00	38.1 AV	68.2	-30.1	1.62 H	268	25.8	12.3
5	19545.00	49.2 PK	74.0	-24.8	2.59 H	138	52.9	-3.7
6	19545.00	38.2 AV	54.0	-15.8	2.59 H	138	41.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	94.7 PK			1.59 V	302	89.6	5.1
2	*6515.00	81.6 AV			1.59 V	302	76.5	5.1
3	#13030.00	47.7 PK	88.2	-40.5	1.89 V	238	35.4	12.3
4	#13030.00	36.7 AV	68.2	-31.5	1.89 V	238	24.4	12.3
5	19545.00	50.1 PK	74.0	-23.9	2.58 V	148	53.8	-3.7
6	19545.00	38.3 AV	54.0	-15.7	2.58 V	148	42.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	93.6 PK			1.38 H	283	87.7	5.9
2	*6875.00	80.3 AV			1.38 H	283	74.4	5.9
3	#13750.00	48.2 PK	88.2	-40.0	1.59 H	269	34.3	13.9
4	#13750.00	37.8 AV	68.2	-30.4	1.59 H	269	23.9	13.9
5	20625.00	48.8 PK	74.0	-25.2	2.58 H	154	52.1	-3.3
6	20625.00	37.7 AV	54.0	-16.3	2.58 H	154	41.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	94.1 PK			1.69 V	323	88.2	5.9
2	*6875.00	81.4 AV			1.69 V	323	75.5	5.9
3	#13750.00	48.1 PK	88.2	-40.1	1.82 V	238	34.2	13.9
4	#13750.00	37.1 AV	68.2	-31.1	1.82 V	238	23.2	13.9
5	20625.00	50.0 PK	74.0	-24.0	2.58 V	160	53.3	-3.3
6	20625.00	38.5 AV	54.0	-15.5	2.58 V	160	41.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	92.9 PK			1.29 H	282	86.0	6.9
2	*6995.00	79.8 AV			1.29 H	282	72.9	6.9
3	#13990.00	48.3 PK	88.2	-39.9	1.61 H	284	33.8	14.5
4	#13990.00	37.7 AV	68.2	-30.5	1.61 H	284	23.2	14.5
5	20985.00	48.8 PK	74.0	-25.2	2.64 H	157	51.5	-2.7
6	20985.00	37.7 AV	54.0	-16.3	2.64 H	157	40.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	94.9 PK			1.59 V	301	88.0	6.9
2	*6995.00	81.8 AV			1.59 V	301	74.9	6.9
3	#13990.00	48.2 PK	88.2	-40.0	1.87 V	227	33.7	14.5
4	#13990.00	37.2 AV	68.2	-31.0	1.87 V	227	22.7	14.5
5	20985.00	50.4 PK	74.0	-23.6	2.63 V	160	53.1	-2.7
6	20985.00	38.7 AV	54.0	-15.3	2.63 V	160	41.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	87.5 PK			2.09 H	261	80.0	7.5
2	*7115.00	79.7 AV			2.09 H	261	72.2	7.5
3	#7125.00	55.5 PK	88.2	-32.7	2.09 H	261	48.0	7.5
4	#7125.00	44.5 AV	68.2	-23.7	2.09 H	261	37.0	7.5
5	7250.00	56.1 PK	74.0	-17.9	2.09 H	261	48.4	7.7
6	7250.00	44.7 AV	54.0	-9.3	2.09 H	261	37.0	7.7
7	#14230.00	48.4 PK	88.2	-39.8	1.64 H	266	33.8	14.6
8	#14230.00	38.0 AV	68.2	-30.2	1.64 H	266	23.4	14.6
9	21345.00	48.7 PK	74.0	-25.3	2.61 H	133	50.9	-2.2
10	21345.00	37.6 AV	54.0	-16.4	2.61 H	133	39.8	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	87.9 PK			1.56 V	11	80.4	7.5
2	*7115.00	78.0 AV			1.56 V	11	70.5	7.5
3	#7125.00	55.8 PK	88.2	-32.4	1.56 V	11	48.3	7.5
4	#7125.00	44.2 AV	68.2	-24.0	1.56 V	11	36.7	7.5
5	7250.00	56.7 PK	74.0	-17.3	1.56 V	11	49.0	7.7
6	7250.00	44.9 AV	54.0	-9.1	1.56 V	11	37.2	7.7
7	#14230.00	47.9 PK	88.2	-40.3	1.89 V	234	33.3	14.6
8	#14230.00	37.0 AV	68.2	-31.2	1.89 V	234	22.4	14.6
9	21345.00	50.0 PK	74.0	-24.0	2.58 V	165	52.2	-2.2
10	21345.00	38.5 AV	54.0	-15.5	2.58 V	165	40.7	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.8 PK			1.26 H	285	89.1	4.7
2	*6435.00	82.3 AV			1.26 H	285	77.6	4.7
3	#12870.00	48.6 PK	88.2	-39.6	1.65 H	278	35.8	12.8
4	#12870.00	37.9 AV	68.2	-30.3	1.65 H	278	25.1	12.8
5	19305.00	48.7 PK	74.0	-25.3	2.57 H	130	52.6	-3.9
6	19305.00	37.7 AV	54.0	-16.3	2.57 H	130	41.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	95.3 PK			1.48 V	311	90.6	4.7
2	*6435.00	82.1 AV			1.48 V	311	77.4	4.7
3	#12870.00	48.2 PK	88.2	-40.0	1.84 V	232	35.4	12.8
4	#12870.00	37.3 AV	68.2	-30.9	1.84 V	232	24.5	12.8
5	19305.00	50.4 PK	74.0	-23.6	2.68 V	157	54.3	-3.9
6	19305.00	38.6 AV	54.0	-15.4	2.68 V	157	42.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	94.3 PK			1.26 H	284	89.4	4.9
2	*6475.00	82.5 AV			1.26 H	284	77.6	4.9
3	#12950.00	48.3 PK	88.2	-39.9	1.64 H	267	35.8	12.5
4	#12950.00	37.5 AV	68.2	-30.7	1.64 H	267	25.0	12.5
5	19425.00	49.3 PK	74.0	-24.7	2.67 H	147	52.8	-3.5
6	19425.00	38.3 AV	54.0	-15.7	2.67 H	147	41.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	96.0 PK			1.45 V	318	91.1	4.9
2	*6475.00	82.6 AV			1.45 V	318	77.7	4.9
3	#12950.00	48.1 PK	88.2	-40.1	1.81 V	237	35.6	12.5
4	#12950.00	37.1 AV	68.2	-31.1	1.81 V	237	24.6	12.5
5	19425.00	49.8 PK	74.0	-24.2	2.64 V	153	53.3	-3.5
6	19425.00	38.4 AV	54.0	-15.6	2.64 V	153	41.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	93.7 PK			1.30 H	285	88.6	5.1
2	*6515.00	82.0 AV			1.30 H	285	76.9	5.1
3	#13030.00	48.7 PK	88.2	-39.5	1.60 H	296	36.4	12.3
4	#13030.00	37.9 AV	68.2	-30.3	1.60 H	296	25.6	12.3
5	19545.00	48.9 PK	74.0	-25.1	2.68 H	151	52.6	-3.7
6	19545.00	37.7 AV	54.0	-16.3	2.68 H	151	41.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	94.7 PK			1.51 V	311	89.6	5.1
2	*6515.00	81.7 AV			1.51 V	311	76.6	5.1
3	#13030.00	48.0 PK	88.2	-40.2	1.93 V	227	35.7	12.3
4	#13030.00	37.3 AV	68.2	-30.9	1.93 V	227	25.0	12.3
5	19545.00	50.1 PK	74.0	-23.9	2.65 V	165	53.8	-3.7
6	19545.00	38.4 AV	54.0	-15.6	2.65 V	165	42.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	94.6 PK			1.21 H	287	88.7	5.9
2	*6875.00	82.8 AV			1.21 H	287	76.9	5.9
3	#13750.00	48.4 PK	88.2	-39.8	1.60 H	280	34.5	13.9
4	#13750.00	37.7 AV	68.2	-30.5	1.60 H	280	23.8	13.9
5	20625.00	48.7 PK	74.0	-25.3	2.61 H	158	52.0	-3.3
6	20625.00	37.5 AV	54.0	-16.5	2.61 H	158	40.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	95.7 PK			1.48 V	297	89.8	5.9
2	*6875.00	82.3 AV			1.48 V	297	76.4	5.9
3	#13750.00	48.2 PK	88.2	-40.0	1.82 V	235	34.3	13.9
4	#13750.00	37.1 AV	68.2	-31.1	1.82 V	235	23.2	13.9
5	20625.00	49.5 PK	74.0	-24.5	2.57 V	177	52.8	-3.3
6	20625.00	37.8 AV	54.0	-16.2	2.57 V	177	41.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	93.5 PK			1.26 H	293	86.6	6.9
2	*6995.00	81.9 AV			1.26 H	293	75.0	6.9
3	#13990.00	48.0 PK	88.2	-40.2	1.61 H	267	33.5	14.5
4	#13990.00	37.4 AV	68.2	-30.8	1.61 H	267	22.9	14.5
5	20985.00	49.9 PK	74.0	-24.1	2.66 H	149	52.6	-2.7
6	20985.00	38.5 AV	54.0	-15.5	2.66 H	149	41.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	95.3 PK			1.47 V	324	88.4	6.9
2	*6995.00	81.7 AV			1.47 V	324	74.8	6.9
3	#13990.00	48.0 PK	88.2	-40.2	1.83 V	229	33.5	14.5
4	#13990.00	37.3 AV	68.2	-30.9	1.83 V	229	22.8	14.5
5	20985.00	50.7 PK	74.0	-23.3	2.65 V	151	53.4	-2.7
6	20985.00	38.7 AV	54.0	-15.3	2.65 V	151	41.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.0 PK			2.11 H	300	81.5	7.5
2	*7115.00	80.5 AV			2.11 H	300	73.0	7.5
3	#7125.00	55.4 PK	88.2	-32.8	2.11 H	300	47.9	7.5
4	#7125.00	44.6 AV	68.2	-23.6	2.11 H	300	37.1	7.5
5	7250.00	54.8 PK	74.0	-19.2	2.11 H	300	47.1	7.7
6	7250.00	45.1 AV	54.0	-8.9	2.11 H	300	37.4	7.7
7	#14230.00	47.7 PK	88.2	-40.5	1.56 H	277	33.1	14.6
8	#14230.00	37.2 AV	68.2	-31.0	1.56 H	277	22.6	14.6
9	21345.00	49.0 PK	74.0	-25.0	2.60 H	143	51.2	-2.2
10	21345.00	37.8 AV	54.0	-16.2	2.60 H	143	40.0	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	87.8 PK			1.78 V	12	80.3	7.5
2	*7115.00	78.8 AV			1.78 V	12	71.3	7.5
3	#7125.00	55.3 PK	88.2	-32.9	1.78 V	12	47.8	7.5
4	#7125.00	44.1 AV	68.2	-24.1	1.78 V	12	36.6	7.5
5	7250.00	54.6 PK	74.0	-19.4	1.78 V	12	46.9	7.7
6	7250.00	45.9 AV	54.0	-8.1	1.78 V	12	38.2	7.7
7	#14230.00	48.1 PK	88.2	-40.1	1.84 V	231	33.5	14.6
8	#14230.00	37.3 AV	68.2	-30.9	1.84 V	231	22.7	14.6
9	21345.00	50.3 PK	74.0	-23.7	2.66 V	157	52.5	-2.2
10	21345.00	38.6 AV	54.0	-15.4	2.66 V	157	40.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.6 PK			2.00 H	308	88.9	4.7
2	*6435.00	81.5 AV			2.00 H	308	76.8	4.7
3	#12870.00	48.7 PK	88.2	-39.5	1.60 H	295	35.9	12.8
4	#12870.00	37.9 AV	68.2	-30.3	1.60 H	295	25.1	12.8
5	19305.00	49.5 PK	74.0	-24.5	2.60 H	156	53.4	-3.9
6	19305.00	38.1 AV	54.0	-15.9	2.60 H	156	42.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.2 PK			1.32 V	309	88.5	4.7
2	*6435.00	81.2 AV			1.32 V	309	76.5	4.7
3	#12870.00	47.3 PK	88.2	-40.9	1.89 V	232	34.5	12.8
4	#12870.00	36.6 AV	68.2	-31.6	1.89 V	232	23.8	12.8
5	19305.00	49.6 PK	74.0	-24.4	2.58 V	148	53.5	-3.9
6	19305.00	37.8 AV	54.0	-16.2	2.58 V	148	41.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	94.2 PK			1.99 H	300	89.3	4.9
2	*6475.00	81.9 AV			1.99 H	300	77.0	4.9
3	#12950.00	48.6 PK	88.2	-39.6	1.59 H	275	36.1	12.5
4	#12950.00	37.8 AV	68.2	-30.4	1.59 H	275	25.3	12.5
5	19425.00	48.9 PK	74.0	-25.1	2.64 H	144	52.4	-3.5
6	19425.00	37.8 AV	54.0	-16.2	2.64 H	144	41.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	92.7 PK			1.32 V	300	87.8	4.9
2	*6475.00	81.3 AV			1.32 V	300	76.4	4.9
3	#12950.00	48.0 PK	88.2	-40.2	1.81 V	227	35.5	12.5
4	#12950.00	37.0 AV	68.2	-31.2	1.81 V	227	24.5	12.5
5	19425.00	49.5 PK	74.0	-24.5	2.63 V	171	53.0	-3.5
6	19425.00	38.0 AV	54.0	-16.0	2.63 V	171	41.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	93.0 PK			1.98 H	312	87.9	5.1
2	*6515.00	81.0 AV			1.98 H	312	75.9	5.1
3	#13030.00	47.8 PK	88.2	-40.4	1.63 H	289	35.5	12.3
4	#13030.00	37.5 AV	68.2	-30.7	1.63 H	289	25.2	12.3
5	19545.00	49.6 PK	74.0	-24.4	2.57 H	137	53.3	-3.7
6	19545.00	38.3 AV	54.0	-15.7	2.57 H	137	42.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	93.1 PK			1.28 V	309	88.0	5.1
2	*6515.00	81.7 AV			1.28 V	309	76.6	5.1
3	#13030.00	48.4 PK	88.2	-39.8	1.85 V	231	36.1	12.3
4	#13030.00	37.3 AV	68.2	-30.9	1.85 V	231	25.0	12.3
5	19545.00	50.1 PK	74.0	-23.9	2.64 V	163	53.8	-3.7
6	19545.00	38.6 AV	54.0	-15.4	2.64 V	163	42.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	93.8 PK			1.99 H	293	87.9	5.9
2	*6875.00	81.5 AV			1.99 H	293	75.6	5.9
3	#13750.00	47.9 PK	88.2	-40.3	1.68 H	289	34.0	13.9
4	#13750.00	37.5 AV	68.2	-30.7	1.68 H	289	23.6	13.9
5	20625.00	49.4 PK	74.0	-24.6	2.62 H	128	52.7	-3.3
6	20625.00	38.4 AV	54.0	-15.6	2.62 H	128	41.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	93.5 PK			1.29 V	306	87.6	5.9
2	*6875.00	81.8 AV			1.29 V	306	75.9	5.9
3	#13750.00	48.2 PK	88.2	-40.0	1.86 V	244	34.3	13.9
4	#13750.00	37.0 AV	68.2	-31.2	1.86 V	244	23.1	13.9
5	20625.00	50.1 PK	74.0	-23.9	2.58 V	165	53.4	-3.3
6	20625.00	38.5 AV	54.0	-15.5	2.58 V	165	41.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	93.3 PK			2.00 H	305	86.4	6.9
2	*6995.00	81.3 AV			2.00 H	305	74.4	6.9
3	#13990.00	48.0 PK	88.2	-40.2	1.57 H	293	33.5	14.5
4	#13990.00	37.2 AV	68.2	-31.0	1.57 H	293	22.7	14.5
5	20985.00	49.3 PK	74.0	-24.7	2.63 H	153	52.0	-2.7
6	20985.00	38.1 AV	54.0	-15.9	2.63 H	153	40.8	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	93.9 PK			1.33 V	298	87.0	6.9
2	*6995.00	82.2 AV			1.33 V	298	75.3	6.9
3	#13990.00	48.0 PK	88.2	-40.2	1.86 V	231	33.5	14.5
4	#13990.00	37.1 AV	68.2	-31.1	1.86 V	231	22.6	14.5
5	20985.00	49.3 PK	74.0	-24.7	2.62 V	170	52.0	-2.7
6	20985.00	37.8 AV	54.0	-16.2	2.62 V	170	40.5	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	87.3 PK			1.22 H	292	79.8	7.5
2	*7115.00	77.1 AV			1.22 H	292	69.6	7.5
3	#7125.00	55.5 PK	88.2	-32.7	1.22 H	292	48.0	7.5
4	#7125.00	44.2 AV	68.2	-24.0	1.22 H	292	36.7	7.5
5	7250.00	54.9 PK	74.0	-19.1	1.22 H	292	47.2	7.7
6	7250.00	43.9 AV	54.0	-10.1	1.22 H	292	36.2	7.7
7	#14230.00	48.3 PK	88.2	-39.9	1.58 H	295	33.7	14.6
8	#14230.00	37.7 AV	68.2	-30.5	1.58 H	295	23.1	14.6
9	21345.00	48.7 PK	74.0	-25.3	2.62 H	153	50.9	-2.2
10	21345.00	37.8 AV	54.0	-16.2	2.62 H	153	40.0	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.0 PK			2.11 V	15	81.5	7.5
2	*7115.00	78.0 AV			2.11 V	15	70.5	7.5
3	#7125.00	55.5 PK	88.2	-32.7	2.11 V	15	48.0	7.5
4	#7125.00	44.1 AV	68.2	-24.1	2.11 V	15	36.6	7.5
5	7250.00	54.7 PK	74.0	-19.3	2.11 V	15	47.0	7.7
6	7250.00	43.8 AV	54.0	-10.2	2.11 V	15	36.1	7.7
7	#14230.00	47.6 PK	88.2	-40.6	1.86 V	251	33.0	14.6
8	#14230.00	36.9 AV	68.2	-31.3	1.86 V	251	22.3	14.6
9	21345.00	50.5 PK	74.0	-23.5	2.60 V	150	52.7	-2.2
10	21345.00	38.8 AV	54.0	-15.2	2.60 V	150	41.0	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	92.8 PK			1.16 H	292	88.1	4.7
2	*6435.00	81.8 AV			1.16 H	292	77.1	4.7
3	#12870.00	47.9 PK	88.2	-40.3	1.63 H	282	35.1	12.8
4	#12870.00	37.2 AV	68.2	-31.0	1.63 H	282	24.4	12.8
5	19305.00	49.5 PK	74.0	-24.5	2.69 H	154	53.4	-3.9
6	19305.00	38.5 AV	54.0	-15.5	2.69 H	154	42.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	95.5 PK			1.45 V	300	90.8	4.7
2	*6435.00	82.6 AV			1.45 V	300	77.9	4.7
3	#12870.00	47.5 PK	88.2	-40.7	1.89 V	232	34.7	12.8
4	#12870.00	36.6 AV	68.2	-31.6	1.89 V	232	23.8	12.8
5	19305.00	50.3 PK	74.0	-23.7	2.63 V	170	54.2	-3.9
6	19305.00	38.6 AV	54.0	-15.4	2.63 V	170	42.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	92.5 PK			1.17 H	300	87.4	5.1
2	*6515.00	81.4 AV			1.17 H	300	76.3	5.1
3	#13030.00	47.6 PK	88.2	-40.6	1.63 H	285	35.3	12.3
4	#13030.00	37.2 AV	68.2	-31.0	1.63 H	285	24.9	12.3
5	19545.00	49.5 PK	74.0	-24.5	2.60 H	135	53.2	-3.7
6	19545.00	38.1 AV	54.0	-15.9	2.60 H	135	41.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	95.1 PK			1.50 V	289	90.0	5.1
2	*6515.00	82.2 AV			1.50 V	289	77.1	5.1
3	#13030.00	48.3 PK	88.2	-39.9	1.88 V	231	36.0	12.3
4	#13030.00	37.1 AV	68.2	-31.1	1.88 V	231	24.8	12.3
5	19545.00	50.1 PK	74.0	-23.9	2.62 V	153	53.8	-3.7
6	19545.00	38.6 AV	54.0	-15.4	2.62 V	153	42.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	93.3 PK			1.22 H	296	87.4	5.9
2	*6875.00	82.3 AV			1.22 H	296	76.4	5.9
3	#13750.00	48.6 PK	88.2	-39.6	1.63 H	278	34.7	13.9
4	#13750.00	38.0 AV	68.2	-30.2	1.63 H	278	24.1	13.9
5	20625.00	48.9 PK	74.0	-25.1	2.67 H	135	52.2	-3.3
6	20625.00	37.9 AV	54.0	-16.1	2.67 H	135	41.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	95.7 PK			1.47 V	301	89.8	5.9
2	*6875.00	82.5 AV			1.47 V	301	76.6	5.9
3	#13750.00	47.5 PK	88.2	-40.7	1.90 V	252	33.6	13.9
4	#13750.00	36.8 AV	68.2	-31.4	1.90 V	252	22.9	13.9
5	20625.00	49.8 PK	74.0	-24.2	2.67 V	159	53.1	-3.3
6	20625.00	38.3 AV	54.0	-15.7	2.67 V	159	41.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	86.7 PK			1.24 H	252	79.2	7.5
2	*7115.00	76.8 AV			1.24 H	252	69.3	7.5
3	#7125.00	55.6 PK	88.2	-32.6	1.24 H	252	48.1	7.5
4	#7125.00	44.3 AV	68.2	-23.9	1.24 H	252	36.8	7.5
5	7250.00	55.8 PK	74.0	-18.2	1.24 H	252	48.1	7.7
6	7250.00	44.2 AV	54.0	-9.8	1.24 H	252	36.5	7.7
7	#14230.00	47.7 PK	88.2	-40.5	1.60 H	272	33.1	14.6
8	#14230.00	37.3 AV	68.2	-30.9	1.60 H	272	22.7	14.6
9	21345.00	49.5 PK	74.0	-24.5	2.59 H	138	51.7	-2.2
10	21345.00	38.5 AV	54.0	-15.5	2.59 H	138	40.7	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	88.1 PK			1.79 V	13	80.6	7.5
2	*7115.00	79.8 AV			1.79 V	13	72.3	7.5
3	#7125.00	55.4 PK	88.2	-32.8	1.79 V	13	47.9	7.5
4	#7125.00	44.3 AV	68.2	-23.9	1.79 V	13	36.8	7.5
5	7250.00	56.3 PK	74.0	-17.7	1.79 V	13	48.6	7.7
6	7250.00	45.4 AV	54.0	-8.6	1.79 V	13	37.7	7.7
7	#14230.00	47.2 PK	88.2	-41.0	1.86 V	227	32.6	14.6
8	#14230.00	36.6 AV	68.2	-31.6	1.86 V	227	22.0	14.6
9	21345.00	50.2 PK	74.0	-23.8	2.66 V	172	52.4	-2.2
10	21345.00	38.7 AV	54.0	-15.3	2.66 V	172	40.9	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	94.3 PK			2.02 H	294	89.6	4.7
2	*6435.00	82.3 AV			2.02 H	294	77.6	4.7
3	#12870.00	47.7 PK	88.2	-40.5	1.60 H	278	34.9	12.8
4	#12870.00	37.3 AV	68.2	-30.9	1.60 H	278	24.5	12.8
5	19305.00	49.1 PK	74.0	-24.9	2.67 H	128	53.0	-3.9
6	19305.00	38.2 AV	54.0	-15.8	2.67 H	128	42.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	94.0 PK			1.52 V	311	89.3	4.7
2	*6435.00	82.4 AV			1.52 V	311	77.7	4.7
3	#12870.00	48.4 PK	88.2	-39.8	1.89 V	248	35.6	12.8
4	#12870.00	37.3 AV	68.2	-30.9	1.89 V	248	24.5	12.8
5	19305.00	49.7 PK	74.0	-24.3	2.65 V	162	53.6	-3.9
6	19305.00	38.3 AV	54.0	-15.7	2.65 V	162	42.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	94.3 PK			1.99 H	303	89.2	5.1
2	*6515.00	82.5 AV			1.99 H	303	77.4	5.1
3	#13030.00	48.1 PK	88.2	-40.1	1.62 H	284	35.8	12.3
4	#13030.00	37.7 AV	68.2	-30.5	1.62 H	284	25.4	12.3
5	19545.00	49.5 PK	74.0	-24.5	2.62 H	144	53.2	-3.7
6	19545.00	38.4 AV	54.0	-15.6	2.62 H	144	42.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	94.2 PK			1.47 V	303	89.1	5.1
2	*6515.00	82.5 AV			1.47 V	303	77.4	5.1
3	#13030.00	47.6 PK	88.2	-40.6	1.92 V	234	35.3	12.3
4	#13030.00	36.5 AV	68.2	-31.7	1.92 V	234	24.2	12.3
5	19545.00	49.7 PK	74.0	-24.3	2.57 V	174	53.4	-3.7
6	19545.00	38.0 AV	54.0	-16.0	2.57 V	174	41.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	94.5 PK			2.06 H	291	88.6	5.9
2	*6875.00	82.5 AV			2.06 H	291	76.6	5.9
3	#13750.00	47.6 PK	88.2	-40.6	1.66 H	286	33.7	13.9
4	#13750.00	37.3 AV	68.2	-30.9	1.66 H	286	23.4	13.9
5	20625.00	49.3 PK	74.0	-24.7	2.59 H	136	52.6	-3.3
6	20625.00	38.2 AV	54.0	-15.8	2.59 H	136	41.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	93.9 PK			1.58 V	298	88.0	5.9
2	*6875.00	82.1 AV			1.58 V	298	76.2	5.9
3	#13750.00	47.9 PK	88.2	-40.3	1.86 V	245	34.0	13.9
4	#13750.00	36.7 AV	68.2	-31.5	1.86 V	245	22.8	13.9
5	20625.00	50.1 PK	74.0	-23.9	2.64 V	163	53.4	-3.3
6	20625.00	38.1 AV	54.0	-15.9	2.64 V	163	41.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	85.4 PK			2.05 H	254	77.9	7.5
2	*7115.00	77.8 AV			2.05 H	254	70.3	7.5
3	#7125.00	54.9 PK	88.2	-33.3	2.05 H	254	47.4	7.5
4	#7125.00	44.2 AV	68.2	-24.0	2.05 H	254	36.7	7.5
5	7250.00	54.6 PK	74.0	-19.4	2.05 H	254	46.9	7.7
6	7250.00	44.2 AV	54.0	-9.8	2.05 H	254	36.5	7.7
7	#14230.00	47.5 PK	88.2	-40.7	1.60 H	295	32.9	14.6
8	#14230.00	37.1 AV	68.2	-31.1	1.60 H	295	22.5	14.6
9	21345.00	49.2 PK	74.0	-24.8	2.65 H	138	51.4	-2.2
10	21345.00	37.7 AV	54.0	-16.3	2.65 H	138	39.9	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	87.9 PK			2.04 V	299	80.4	7.5
2	*7115.00	80.1 AV			2.04 V	299	72.6	7.5
3	#7125.00	54.4 PK	88.2	-33.8	2.04 V	299	46.9	7.5
4	#7125.00	44.5 AV	68.2	-23.7	2.04 V	299	37.0	7.5
5	7250.00	55.9 PK	74.0	-18.1	2.04 V	299	48.2	7.7
6	7250.00	44.9 AV	54.0	-9.1	2.04 V	299	37.2	7.7
7	#14230.00	48.0 PK	88.2	-40.2	1.81 V	245	33.4	14.6
8	#14230.00	36.9 AV	68.2	-31.3	1.81 V	245	22.3	14.6
9	21345.00	49.9 PK	74.0	-24.1	2.61 V	165	52.1	-2.2
10	21345.00	38.4 AV	54.0	-15.6	2.61 V	165	40.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	93.8 PK			2.04 H	292	89.0	4.8
2	*6465.00	82.4 AV			2.04 H	292	77.6	4.8
3	#12930.00	48.7 PK	88.2	-39.5	1.62 H	281	36.0	12.7
4	#12930.00	37.8 AV	68.2	-30.4	1.62 H	281	25.1	12.7
5	19395.00	49.3 PK	74.0	-24.7	2.58 H	127	52.8	-3.5
6	19395.00	38.3 AV	54.0	-15.7	2.58 H	127	41.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	94.2 PK			1.81 V	298	89.4	4.8
2	*6465.00	82.6 AV			1.81 V	298	77.8	4.8
3	#12930.00	47.6 PK	88.2	-40.6	1.88 V	235	34.9	12.7
4	#12930.00	36.8 AV	68.2	-31.4	1.88 V	235	24.1	12.7
5	19395.00	49.7 PK	74.0	-24.3	2.67 V	162	53.2	-3.5
6	19395.00	38.1 AV	54.0	-15.9	2.67 V	162	41.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	93.4 PK			2.05 H	289	88.0	5.4
2	*6545.00	82.3 AV			2.05 H	289	76.9	5.4
3	#13090.00	48.1 PK	88.2	-40.1	1.63 H	268	35.6	12.5
4	#13090.00	37.6 AV	68.2	-30.6	1.63 H	268	25.1	12.5
5	19635.00	49.3 PK	74.0	-24.7	2.65 H	157	53.3	-4.0
6	19635.00	37.9 AV	54.0	-16.1	2.65 H	157	41.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	93.5 PK			1.76 V	307	88.1	5.4
2	*6545.00	82.1 AV			1.76 V	307	76.7	5.4
3	#13090.00	48.0 PK	88.2	-40.2	1.82 V	249	35.5	12.5
4	#13090.00	37.1 AV	68.2	-31.1	1.82 V	249	24.6	12.5
5	19635.00	49.9 PK	74.0	-24.1	2.62 V	176	53.9	-4.0
6	19635.00	38.0 AV	54.0	-16.0	2.62 V	176	42.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	93.6 PK			2.03 H	306	87.7	5.9
2	*6865.00	82.5 AV			2.03 H	306	76.6	5.9
3	#13730.00	48.8 PK	88.2	-39.4	1.62 H	271	34.8	14.0
4	#13730.00	37.9 AV	68.2	-30.3	1.62 H	271	23.9	14.0
5	20595.00	49.5 PK	74.0	-24.5	2.62 H	149	52.9	-3.4
6	20595.00	38.3 AV	54.0	-15.7	2.62 H	149	41.7	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	94.7 PK			1.85 V	292	88.8	5.9
2	*6865.00	82.9 AV			1.85 V	292	77.0	5.9
3	#13730.00	47.8 PK	88.2	-40.4	1.91 V	257	33.8	14.0
4	#13730.00	36.6 AV	68.2	-31.6	1.91 V	257	22.6	14.0
5	20595.00	49.9 PK	74.0	-24.1	2.66 V	170	53.3	-3.4
6	20595.00	38.0 AV	54.0	-16.0	2.66 V	170	41.4	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	87.7 PK			2.05 H	280	80.8	6.9
2	*7025.00	78.3 AV			2.05 H	280	71.4	6.9
3	#7125.00	55.1 PK	88.2	-33.1	2.05 H	280	47.6	7.5
4	#7125.00	44.2 AV	68.2	-24.0	2.05 H	280	36.7	7.5
5	7250.00	56.3 PK	74.0	-17.7	2.05 H	280	48.6	7.7
6	7250.00	44.4 AV	54.0	-9.6	2.05 H	280	36.7	7.7
7	#14050.00	48.2 PK	88.2	-40.0	1.65 H	271	33.6	14.6
8	#14050.00	37.5 AV	68.2	-30.7	1.65 H	271	22.9	14.6
9	21075.00	49.2 PK	74.0	-24.8	2.57 H	128	51.9	-2.7
10	21075.00	38.1 AV	54.0	-15.9	2.57 H	128	40.8	-2.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	87.6 PK			1.71 V	50	80.7	6.9
2	*7025.00	78.6 AV			1.71 V	50	71.7	6.9
3	#7125.00	55.4 PK	88.2	-32.8	1.71 V	50	47.9	7.5
4	#7125.00	44.9 AV	68.2	-23.3	1.71 V	50	37.4	7.5
5	7250.00	56.1 PK	74.0	-17.9	1.71 V	50	48.4	7.7
6	7250.00	43.1 AV	54.0	-10.9	1.71 V	50	35.4	7.7
7	#14050.00	47.6 PK	88.2	-40.6	1.89 V	238	33.0	14.6
8	#14050.00	36.6 AV	68.2	-31.6	1.89 V	238	22.0	14.6
9	21075.00	49.6 PK	74.0	-24.4	2.59 V	154	52.3	-2.7
10	21075.00	38.1 AV	54.0	-15.9	2.59 V	154	40.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	89.5 PK			2.07 H	290	84.5	5.0
2	*6505.00	79.3 AV			2.07 H	290	74.3	5.0
3	#13010.00	48.0 PK	88.2	-40.2	1.59 H	296	35.7	12.3
4	#13010.00	37.7 AV	68.2	-30.5	1.59 H	296	25.4	12.3
5	19515.00	48.8 PK	74.0	-25.2	2.59 H	152	52.3	-3.5
6	19515.00	37.5 AV	54.0	-16.5	2.59 H	152	41.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	92.8 PK			1.34 V	318	87.8	5.0
2	*6505.00	80.9 AV			1.34 V	318	75.9	5.0
3	#13010.00	47.3 PK	88.2	-40.9	1.86 V	234	35.0	12.3
4	#13010.00	36.6 AV	68.2	-31.6	1.86 V	234	24.3	12.3
5	19515.00	49.7 PK	74.0	-24.3	2.62 V	175	53.2	-3.5
6	19515.00	38.2 AV	54.0	-15.8	2.62 V	175	41.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	90.0 PK			2.10 H	289	84.2	5.8
2	*6825.00	79.7 AV			2.10 H	289	73.9	5.8
3	#13650.00	47.8 PK	88.2	-40.4	1.63 H	279	33.9	13.9
4	#13650.00	37.2 AV	68.2	-31.0	1.63 H	279	23.3	13.9
5	20475.00	48.6 PK	74.0	-25.4	2.60 H	135	51.5	-2.9
6	20475.00	37.7 AV	54.0	-16.3	2.60 H	135	40.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	93.0 PK			1.39 V	313	87.2	5.8
2	*6825.00	81.0 AV			1.39 V	313	75.2	5.8
3	#13650.00	47.3 PK	88.2	-40.9	1.92 V	244	33.4	13.9
4	#13650.00	36.4 AV	68.2	-31.8	1.92 V	244	22.5	13.9
5	20475.00	50.1 PK	74.0	-23.9	2.69 V	149	53.0	-2.9
6	20475.00	38.7 AV	54.0	-15.3	2.69 V	149	41.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	86.7 PK			2.01 H	283	79.8	6.9
2	*6985.00	75.1 AV			2.01 H	283	68.2	6.9
3	#7125.00	55.0 PK	88.2	-33.2	2.01 H	283	47.5	7.5
4	#7125.00	44.5 AV	68.2	-23.7	2.01 H	283	37.0	7.5
5	7250.00	55.5 PK	74.0	-18.5	2.01 H	283	47.8	7.7
6	7250.00	44.1 AV	54.0	-9.9	2.01 H	283	36.4	7.7
7	#13970.00	48.1 PK	88.2	-40.1	1.64 H	282	33.7	14.4
8	#13970.00	37.6 AV	68.2	-30.6	1.64 H	282	23.2	14.4
9	20955.00	49.4 PK	74.0	-24.6	2.58 H	130	52.0	-2.6
10	20955.00	38.0 AV	54.0	-16.0	2.58 H	130	40.6	-2.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	87.6 PK			1.60 V	18	80.7	6.9
2	*6985.00	76.1 AV			1.60 V	18	69.2	6.9
3	#7125.00	55.9 PK	88.2	-32.3	1.60 V	18	48.4	7.5
4	#7125.00	44.5 AV	68.2	-23.7	1.60 V	18	37.0	7.5
5	7250.00	54.8 PK	74.0	-19.2	1.60 V	18	47.1	7.7
6	7250.00	45.7 AV	54.0	-8.3	1.60 V	18	38.0	7.7
7	#13970.00	47.9 PK	88.2	-40.3	1.81 V	247	33.5	14.4
8	#13970.00	37.2 AV	68.2	-31.0	1.81 V	247	22.8	14.4
9	20955.00	49.2 PK	74.0	-24.8	2.66 V	148	51.8	-2.6
10	20955.00	37.8 AV	54.0	-16.2	2.66 V	148	40.4	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	92.3 PK			1.13 H	286	87.3	5.0
2	*6505.00	80.5 AV			1.13 H	286	75.5	5.0
3	#13010.00	48.3 PK	88.2	-39.9	1.62 H	269	36.0	12.3
4	#13010.00	37.7 AV	68.2	-30.5	1.62 H	269	25.4	12.3
5	19515.00	49.1 PK	74.0	-24.9	2.66 H	158	52.6	-3.5
6	19515.00	38.1 AV	54.0	-15.9	2.66 H	158	41.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	92.2 PK			1.48 V	309	87.2	5.0
2	*6505.00	80.2 AV			1.48 V	309	75.2	5.0
3	#13010.00	47.5 PK	88.2	-40.7	1.83 V	227	35.2	12.3
4	#13010.00	36.9 AV	68.2	-31.3	1.83 V	227	24.6	12.3
5	19515.00	50.2 PK	74.0	-23.8	2.67 V	175	53.7	-3.5
6	19515.00	38.7 AV	54.0	-15.3	2.67 V	175	42.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	92.0 PK			1.08 H	280	86.2	5.8
2	*6825.00	80.0 AV			1.08 H	280	74.2	5.8
3	#13650.00	48.3 PK	88.2	-39.9	1.57 H	271	34.4	13.9
4	#13650.00	37.5 AV	68.2	-30.7	1.57 H	271	23.6	13.9
5	20475.00	49.0 PK	74.0	-25.0	2.68 H	143	51.9	-2.9
6	20475.00	37.7 AV	54.0	-16.3	2.68 H	143	40.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	92.6 PK			1.43 V	325	86.8	5.8
2	*6825.00	80.3 AV			1.43 V	325	74.5	5.8
3	#13650.00	47.4 PK	88.2	-40.8	1.86 V	235	33.5	13.9
4	#13650.00	36.8 AV	68.2	-31.4	1.86 V	235	22.9	13.9
5	20475.00	50.5 PK	74.0	-23.5	2.67 V	178	53.4	-2.9
6	20475.00	38.7 AV	54.0	-15.3	2.67 V	178	41.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 74% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	86.4 PK			2.02 H	282	79.5	6.9
2	*6985.00	75.4 AV			2.02 H	282	68.5	6.9
3	#7125.00	54.4 PK	88.2	-33.8	2.02 H	282	46.9	7.5
4	#7125.00	44.2 AV	68.2	-24.0	2.02 H	282	36.7	7.5
5	7250.00	55.3 PK	74.0	-18.7	2.02 H	282	47.6	7.7
6	7250.00	44.1 AV	54.0	-9.9	2.02 H	282	36.4	7.7
7	#13970.00	48.7 PK	88.2	-39.5	1.56 H	275	34.3	14.4
8	#13970.00	38.0 AV	68.2	-30.2	1.56 H	275	23.6	14.4
9	20955.00	49.0 PK	74.0	-25.0	2.58 H	129	51.6	-2.6
10	20955.00	37.7 AV	54.0	-16.3	2.58 H	129	40.3	-2.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	87.5 PK			1.48 V	301	80.6	6.9
2	*6985.00	76.6 AV			1.48 V	301	69.7	6.9
3	#7125.00	55.3 PK	88.2	-32.9	1.48 V	301	47.8	7.5
4	#7125.00	43.8 AV	68.2	-24.4	1.48 V	301	36.3	7.5
5	7250.00	56.7 PK	74.0	-17.3	1.48 V	301	49.0	7.7
6	7250.00	43.1 AV	54.0	-10.9	1.48 V	301	35.4	7.7
7	#13970.00	48.2 PK	88.2	-40.0	1.84 V	234	33.8	14.4
8	#13970.00	37.1 AV	68.2	-31.1	1.84 V	234	22.7	14.4
9	20955.00	50.0 PK	74.0	-24.0	2.65 V	166	52.6	-2.6
10	20955.00	38.3 AV	54.0	-15.7	2.65 V	166	40.9	-2.6

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Mode B_1TX

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11a Channel 233

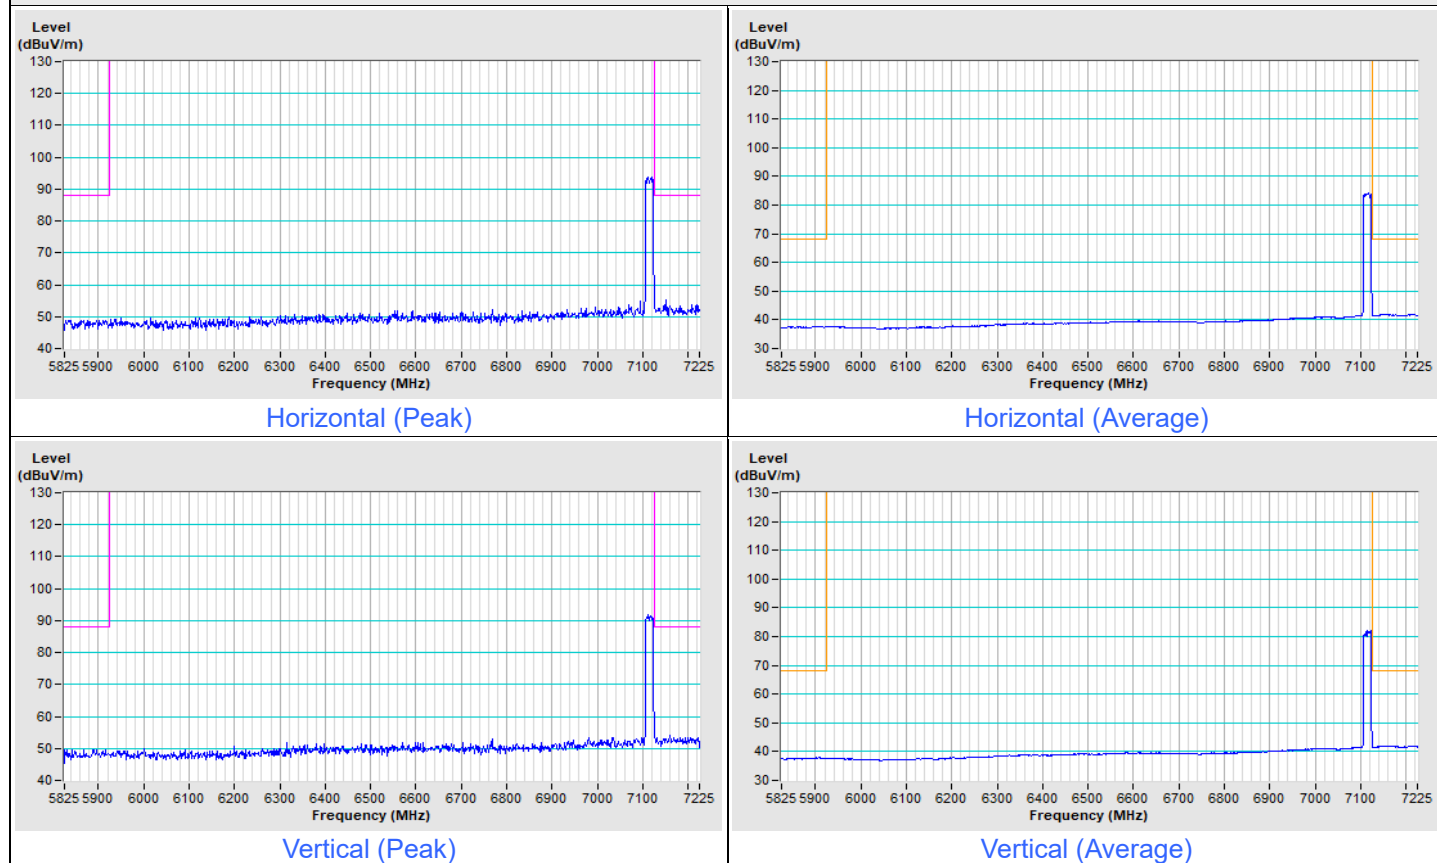


For Integration method:

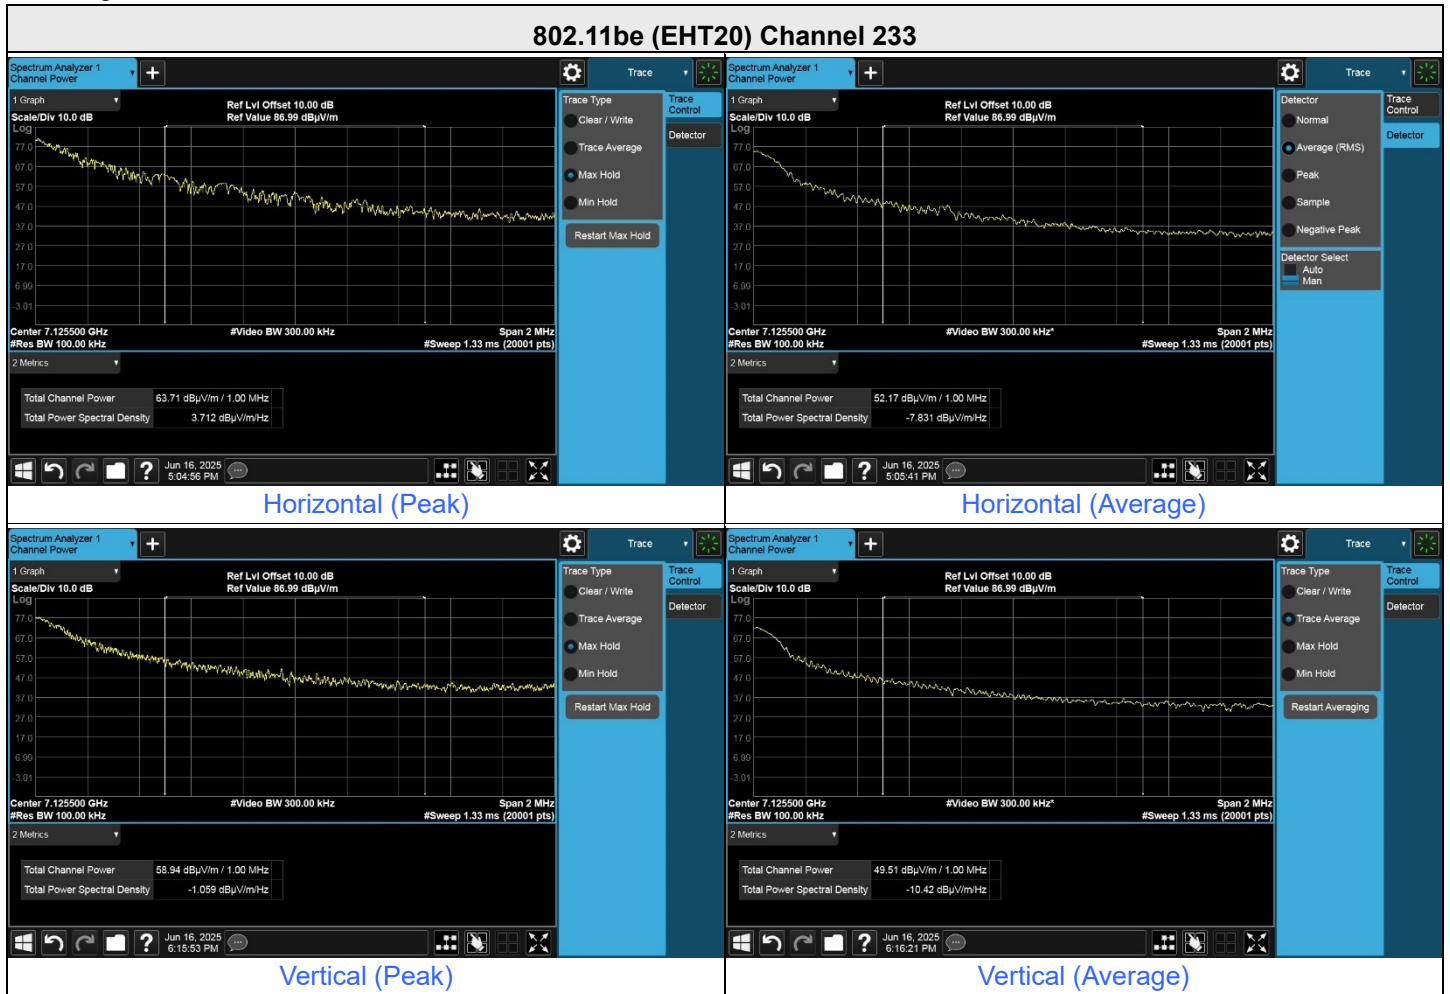


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 227

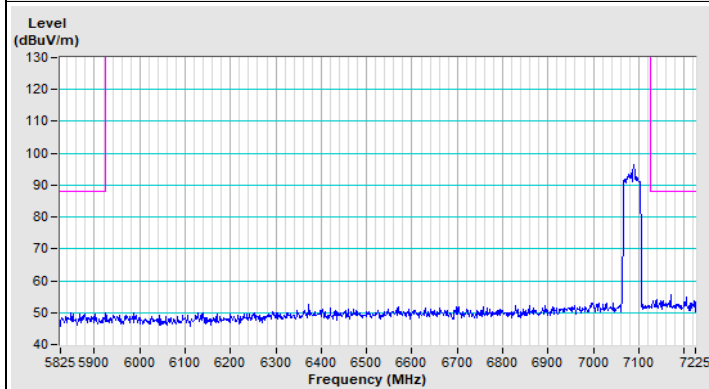


Horizontal (Peak)

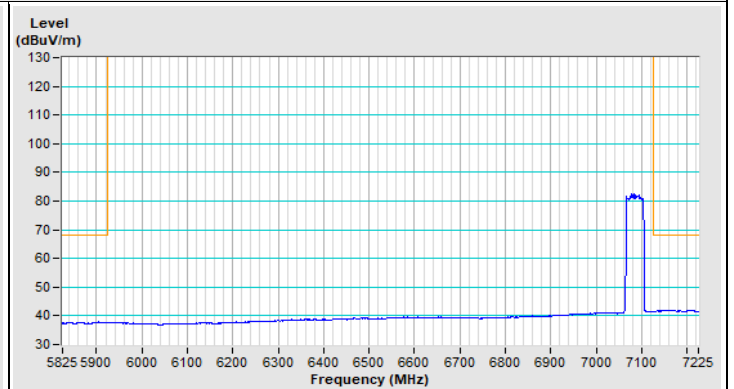

Horizontal (Average)

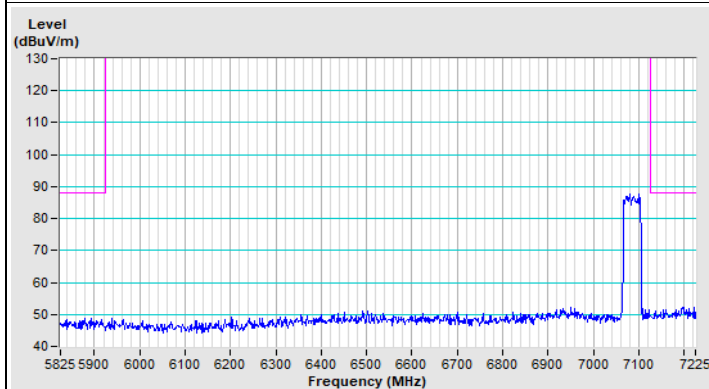


Vertical (Peak)

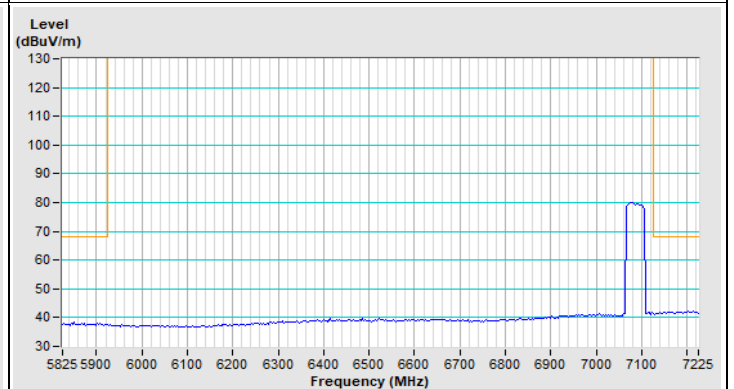


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 215

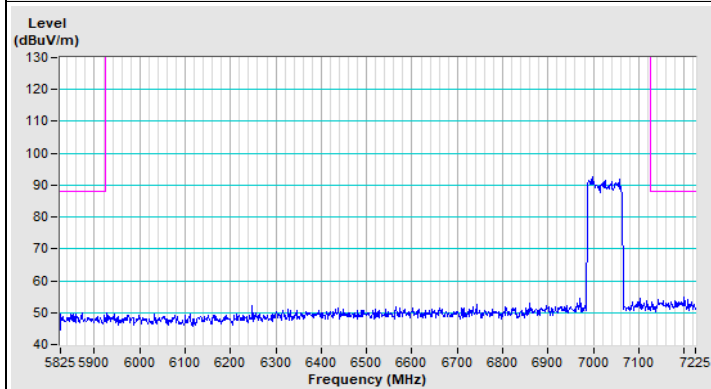


Horizontal (Peak)

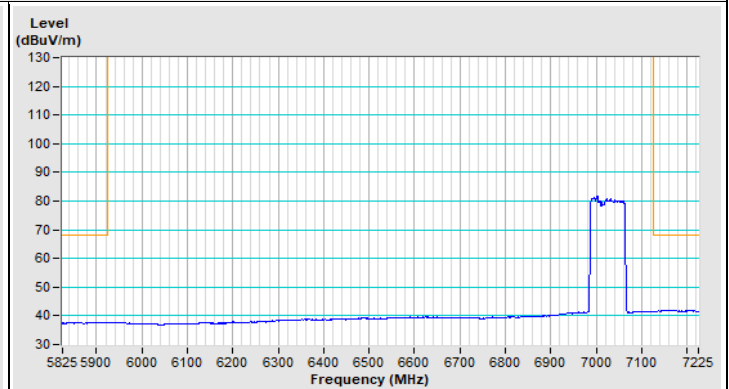

Horizontal (Average)

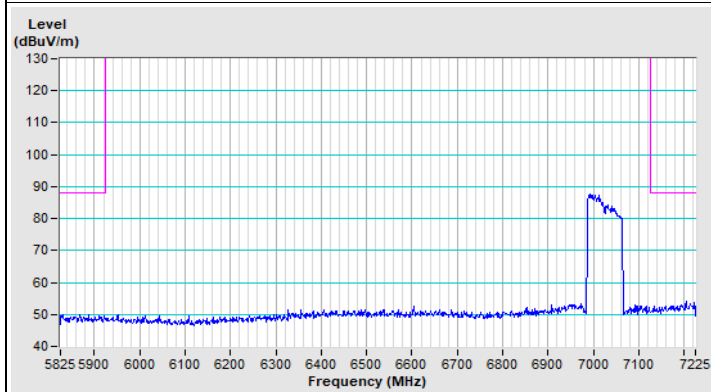


Vertical (Peak)

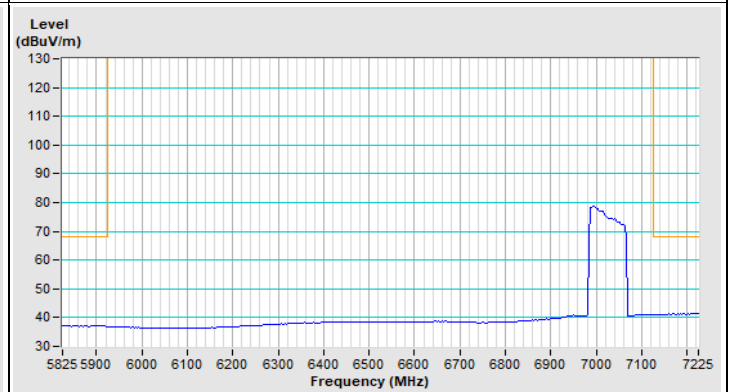


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 207

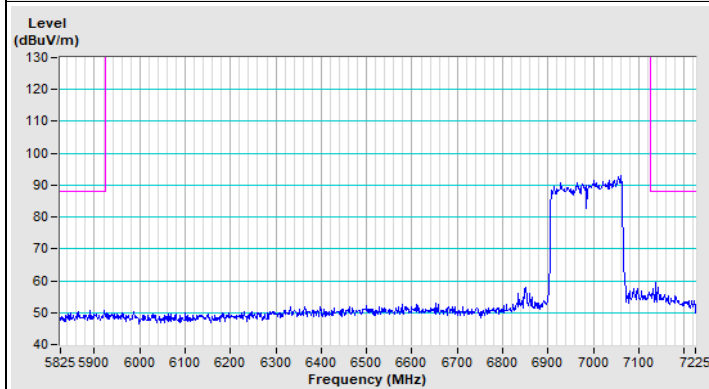


Horizontal (Peak)

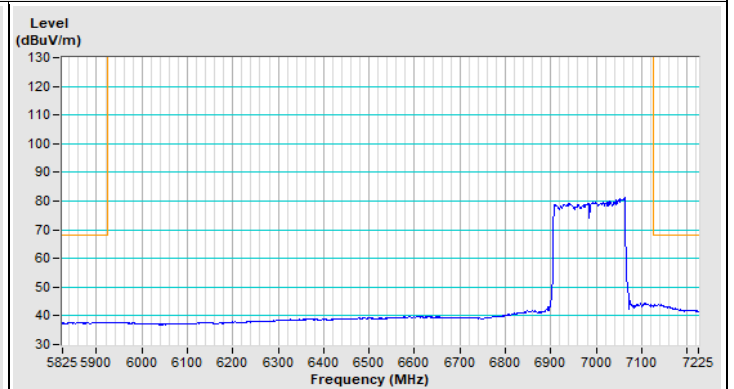

Horizontal (Average)

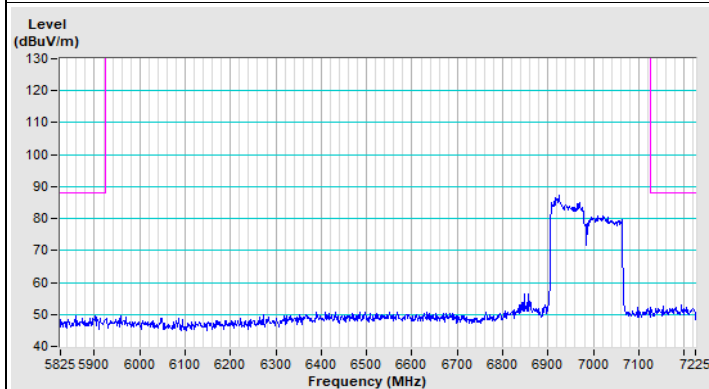


Vertical (Peak)

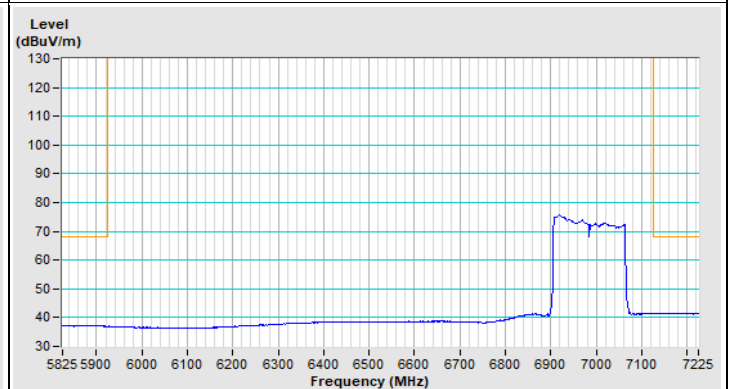


Vertical (Average)

For Integration method:


802.11be (EHT20) 26-tone RU Channel 233

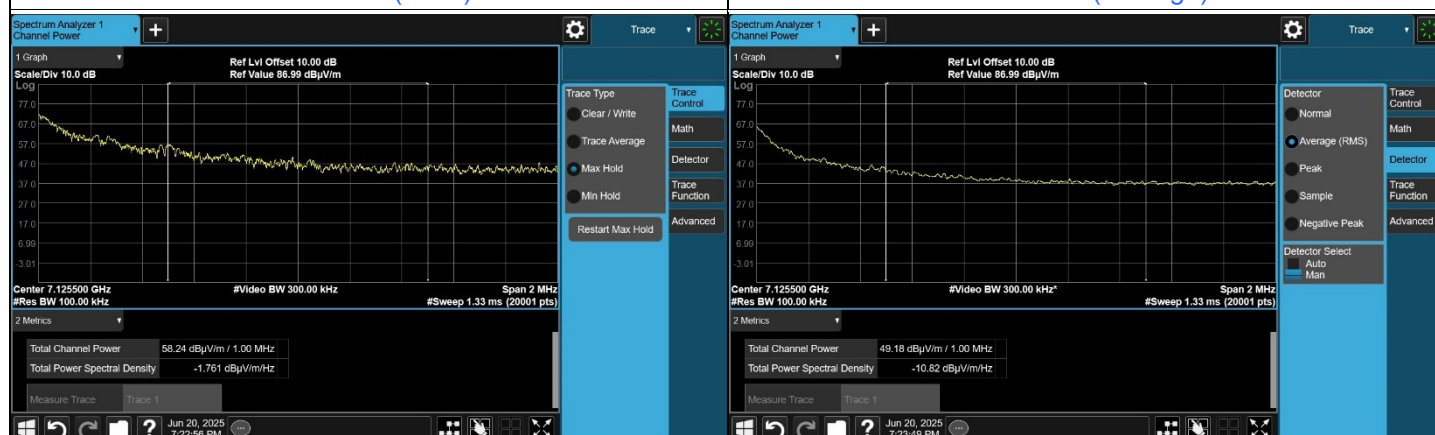


802.11ax (HE20) 52-tone RU Channel 233

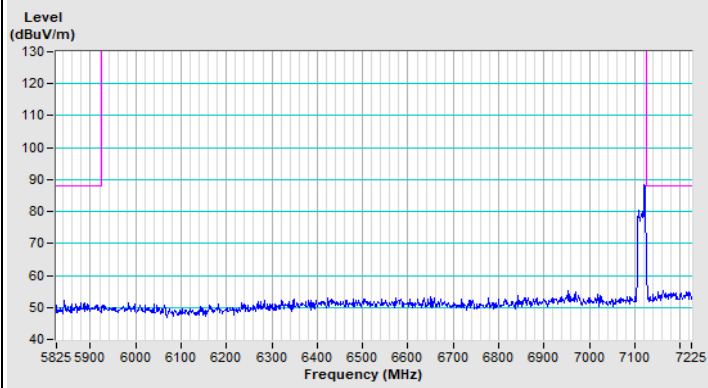


Horizontal (Peak)

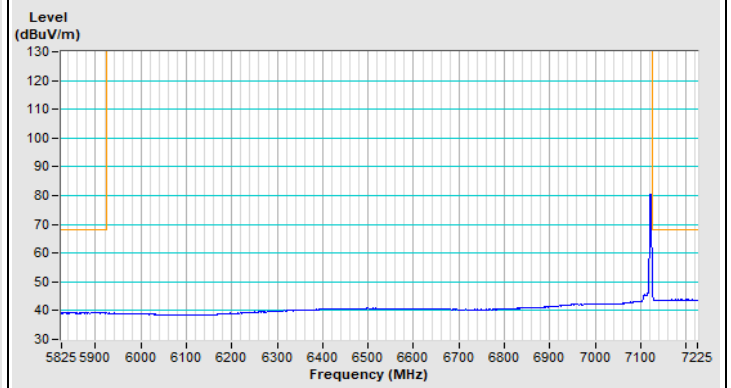


Horizontal (Average)

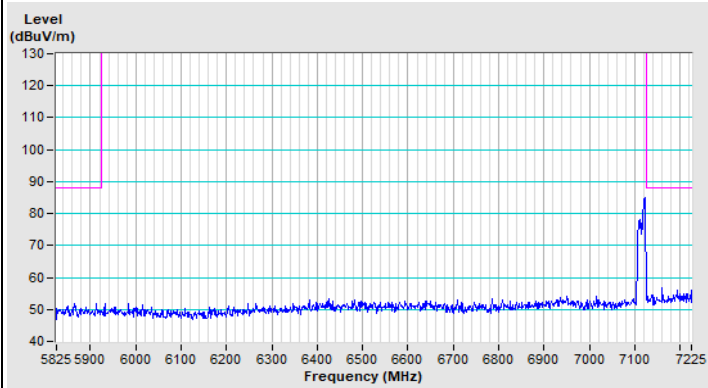


Vertical (Peak)

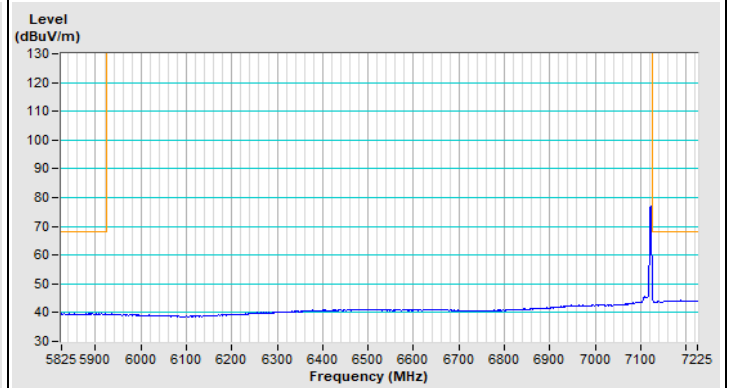


Vertical (Average)

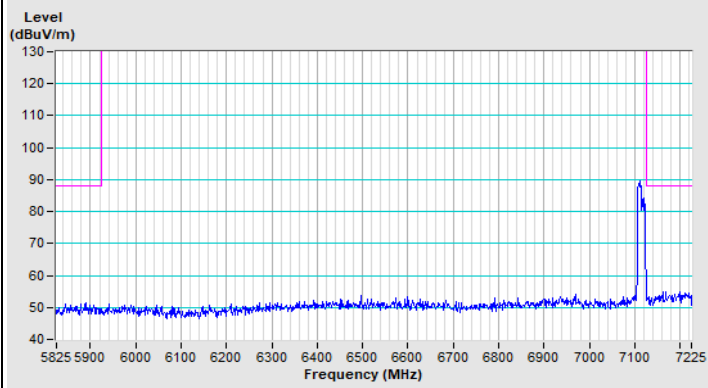802.11ax (HE20) 106-tone RU Channel 233


Horizontal (Peak)

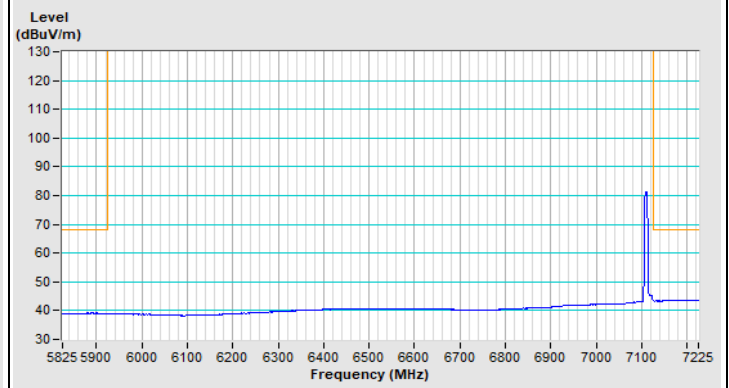


Horizontal (Average)

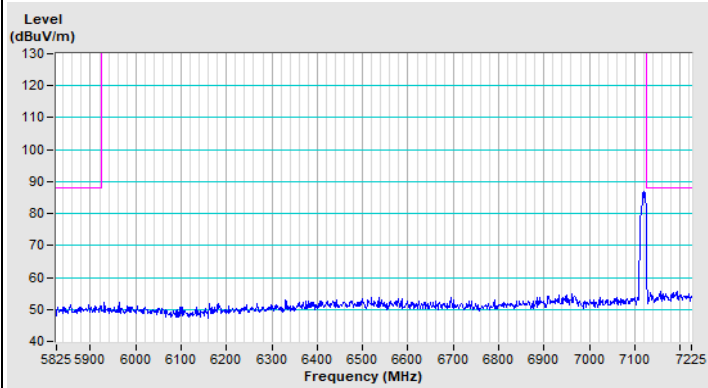


Vertical (Peak)

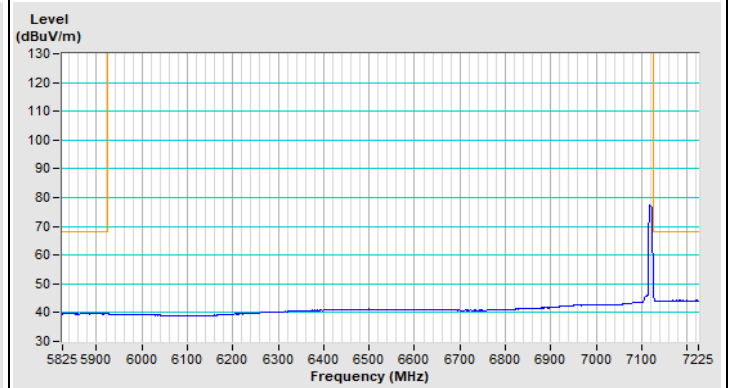


Vertical (Average)

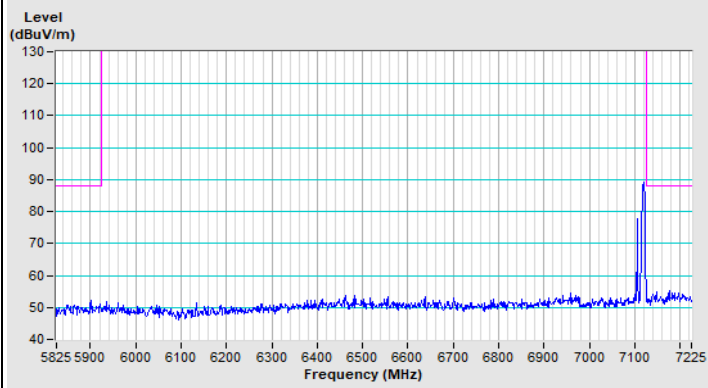802.11be (EHT20) 52+26-tone MRU Channel 233


Horizontal (Peak)

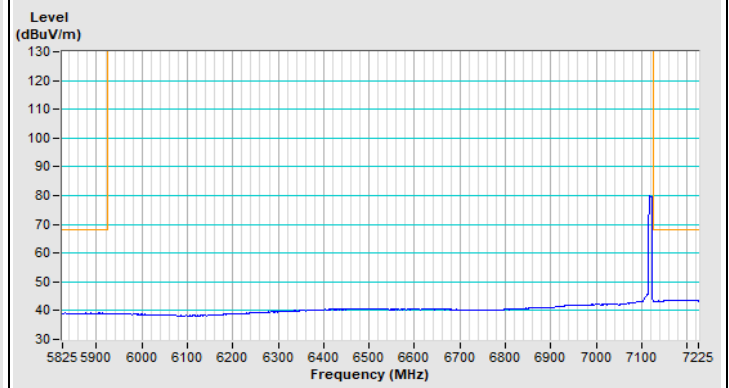

Horizontal (Average)

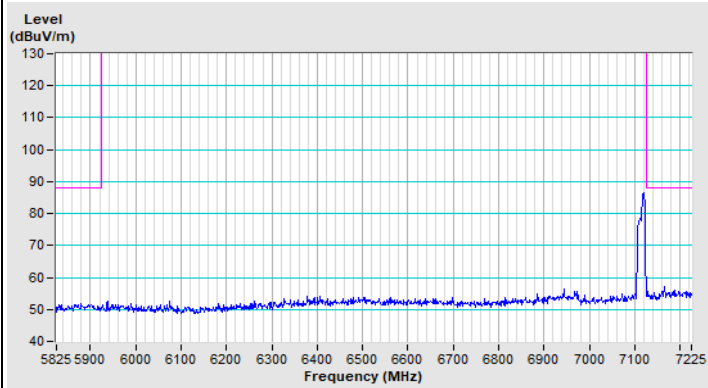


Vertical (Peak)

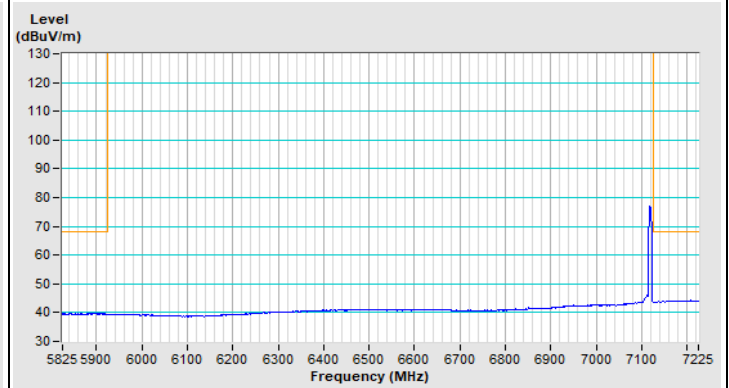


Vertical (Average)

For Integration method:

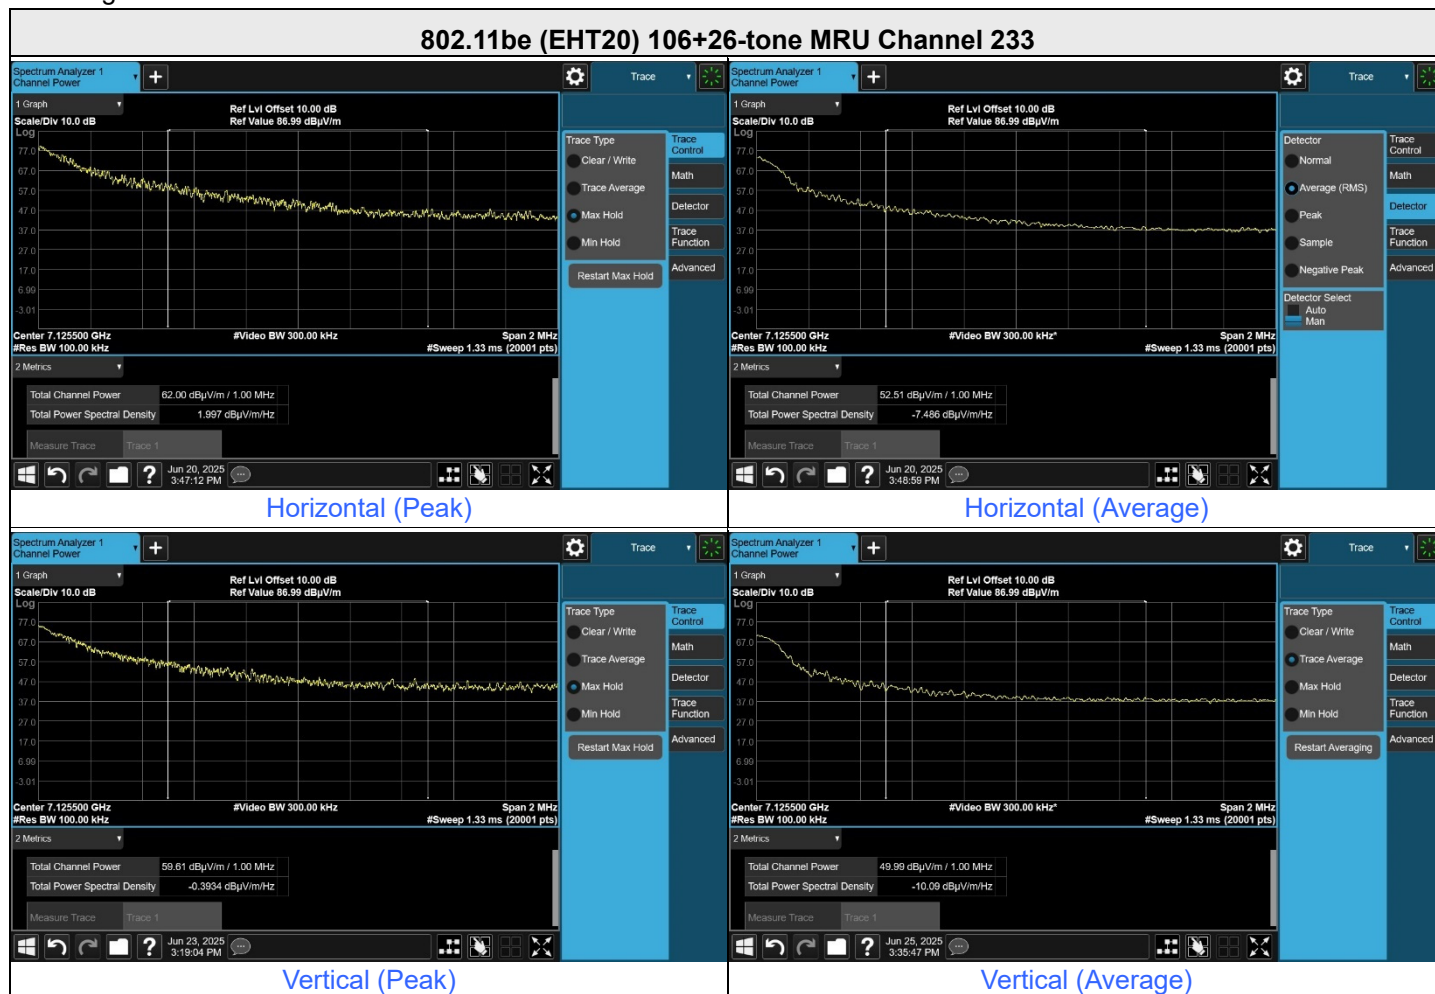


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 215

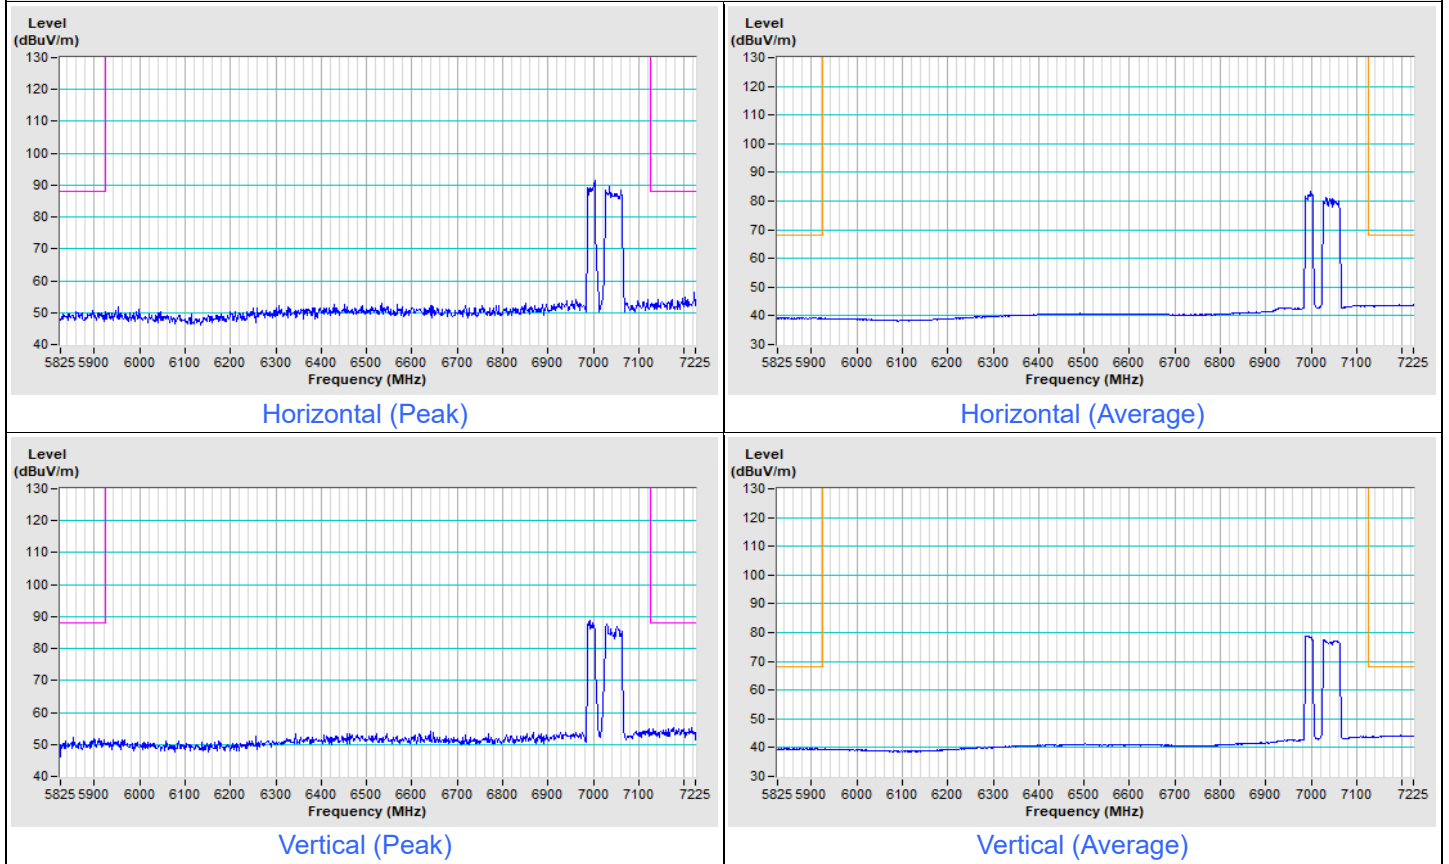


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 207

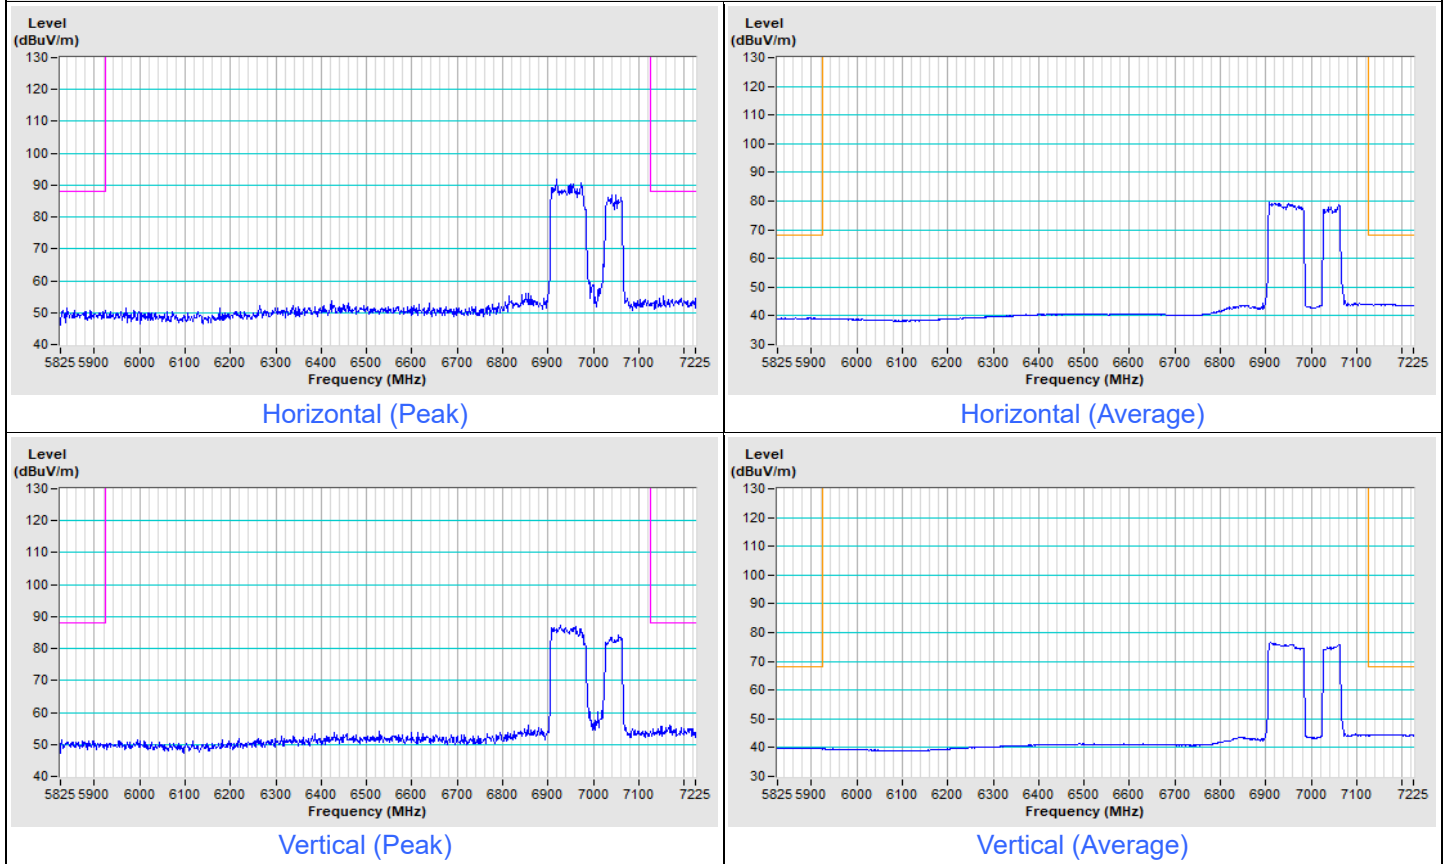


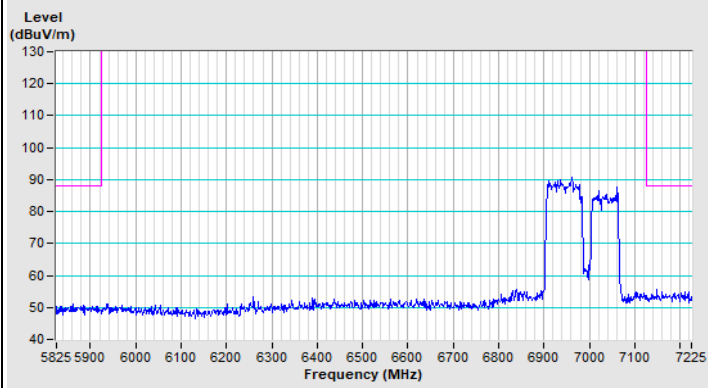802.11be (EHT160) 996+484+242-tone MRU Channel 207


Horizontal (Peak)

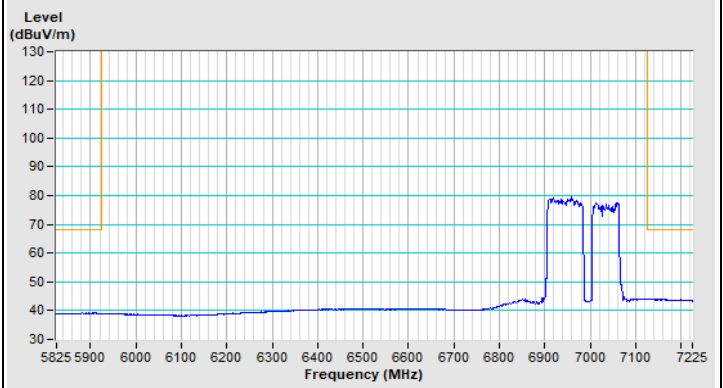

Horizontal (Average)

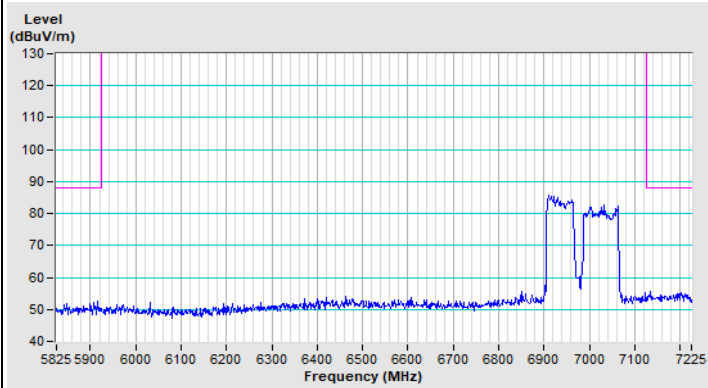

Vertical (Peak)

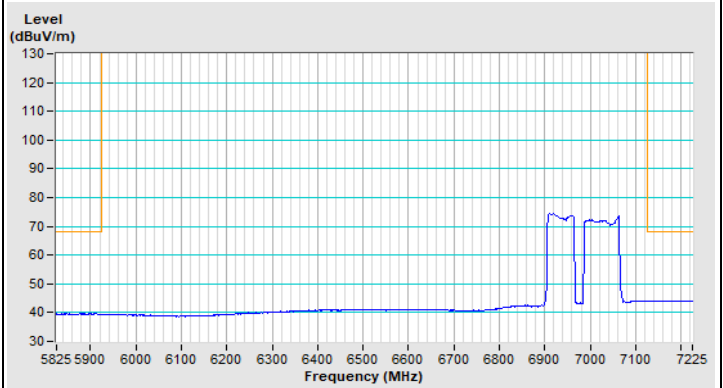


Vertical (Average)

Plot of Band Edge

Mode B_2TX

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11a Channel 233

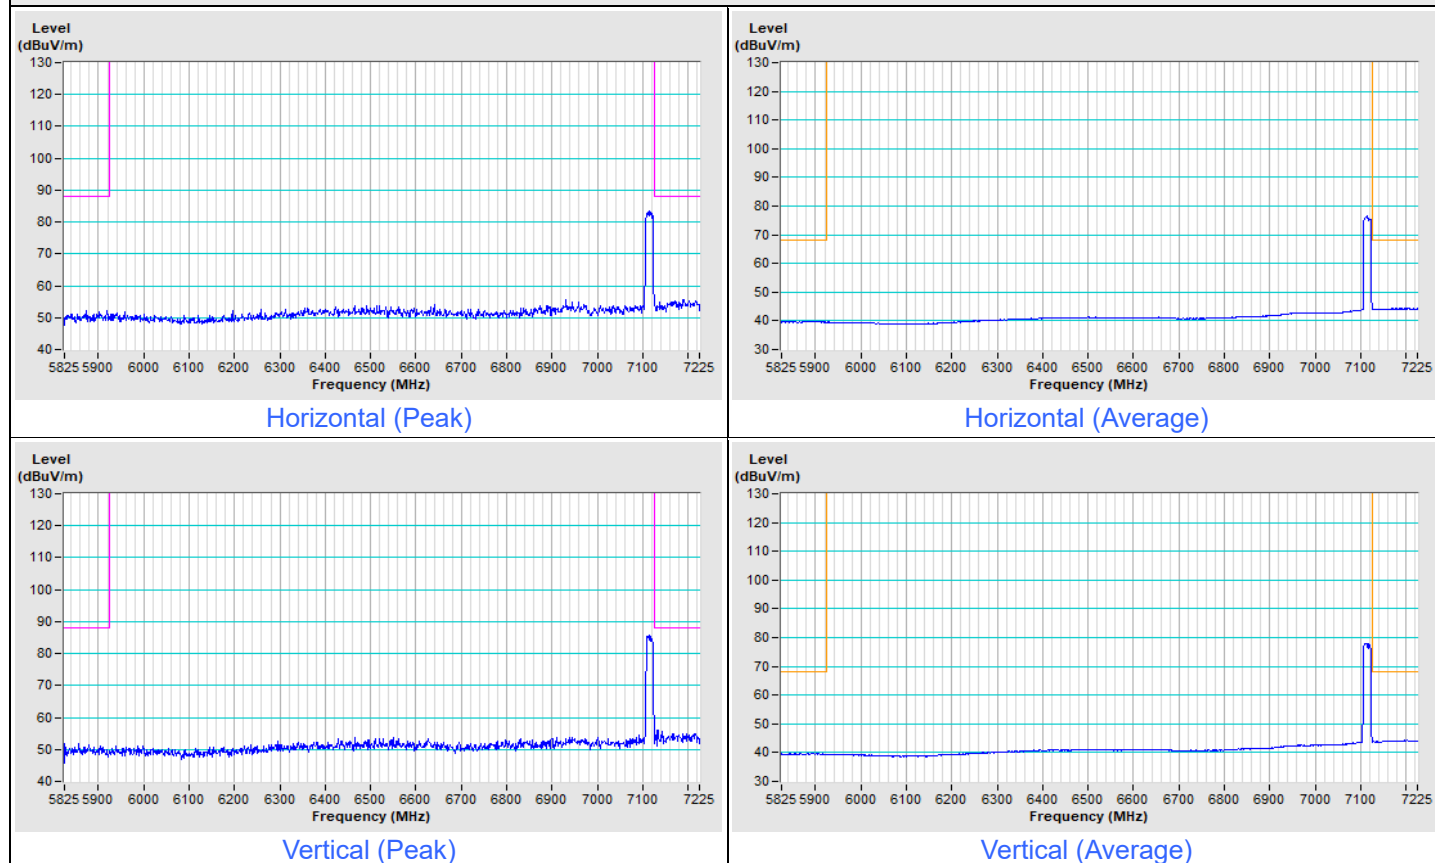

For Integration method:

802.11be (EHT20) Channel 233

