



Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 227

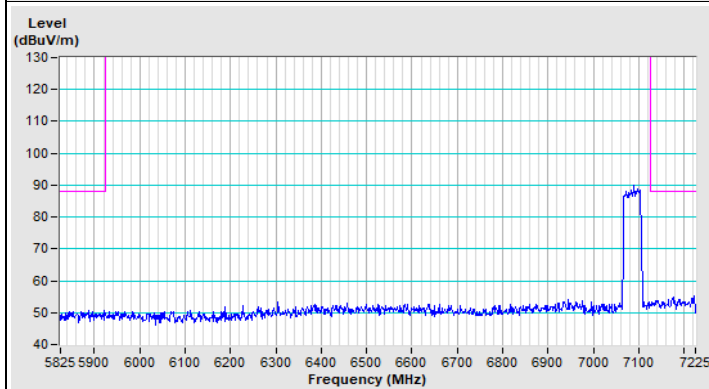


Horizontal (Peak)

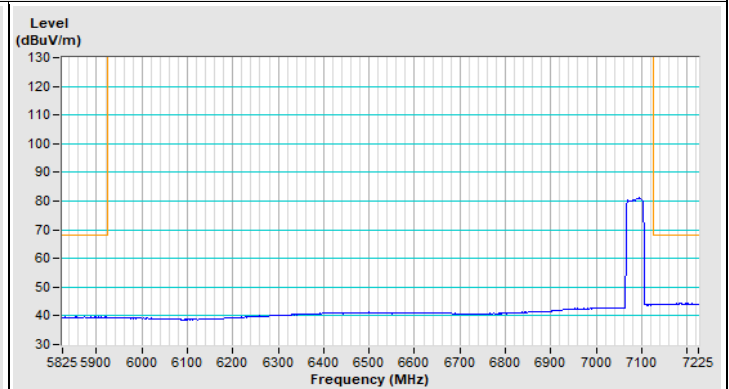

Horizontal (Average)

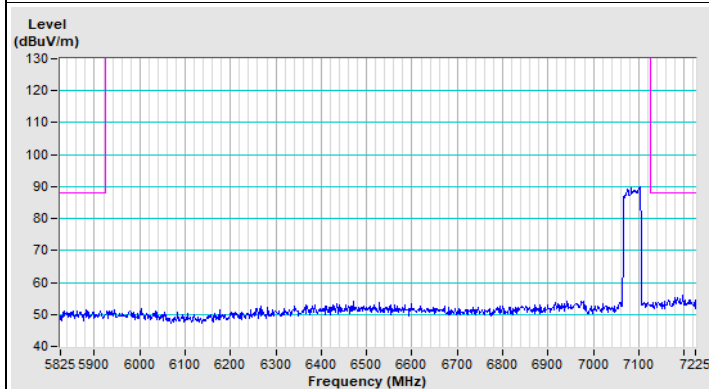


Vertical (Peak)

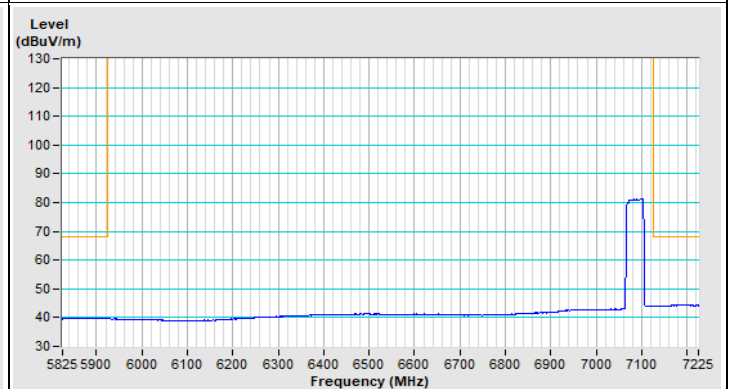


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 215

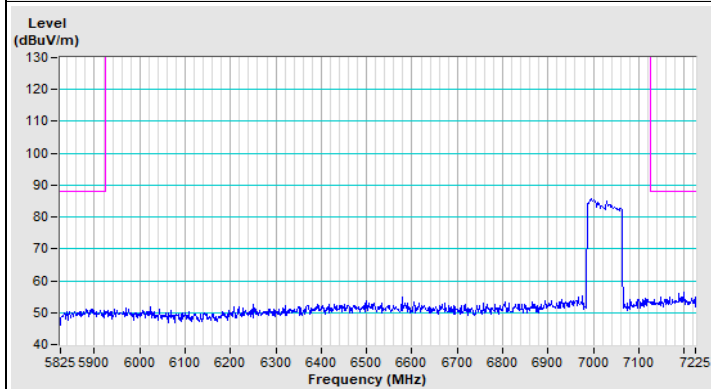


Horizontal (Peak)

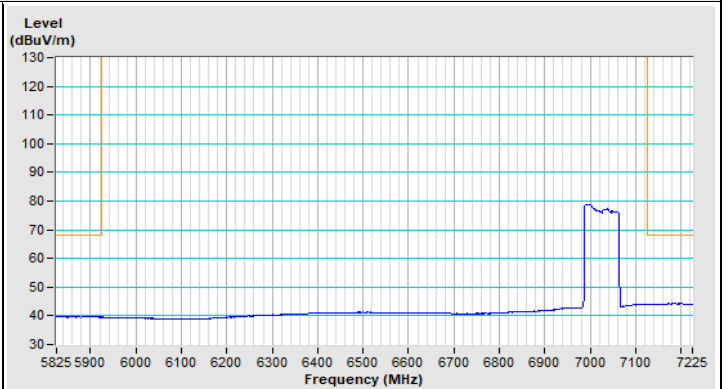

Horizontal (Average)

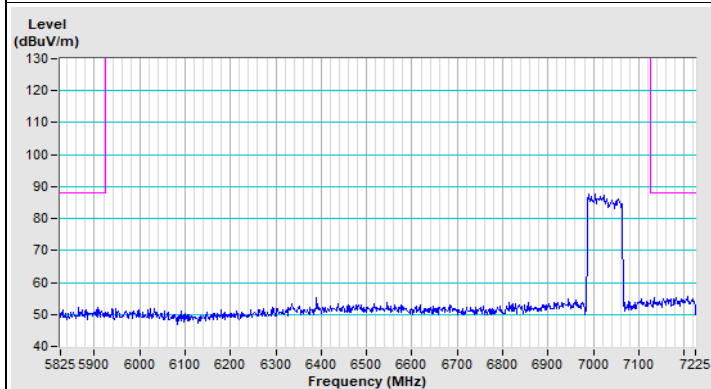


Vertical (Peak)

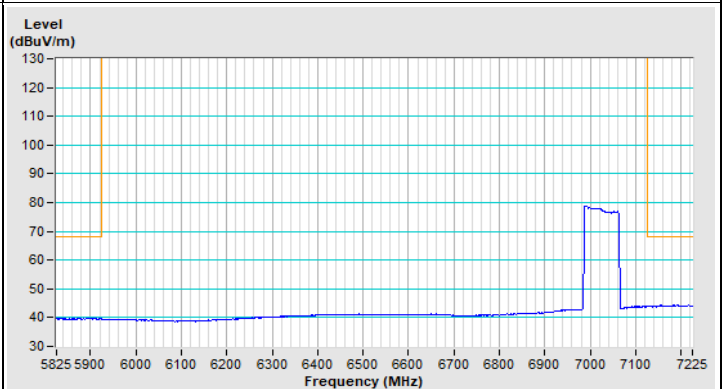


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 207

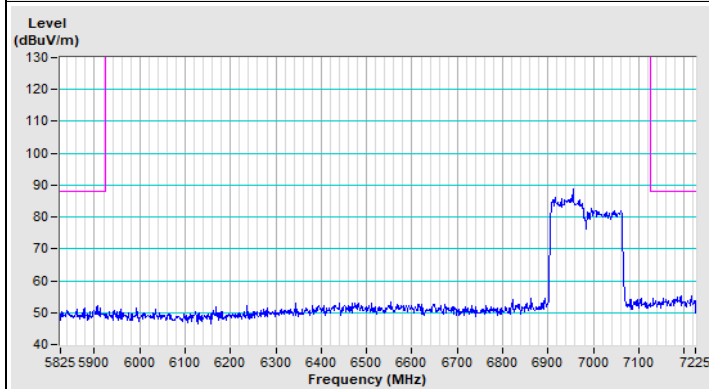


Horizontal (Peak)

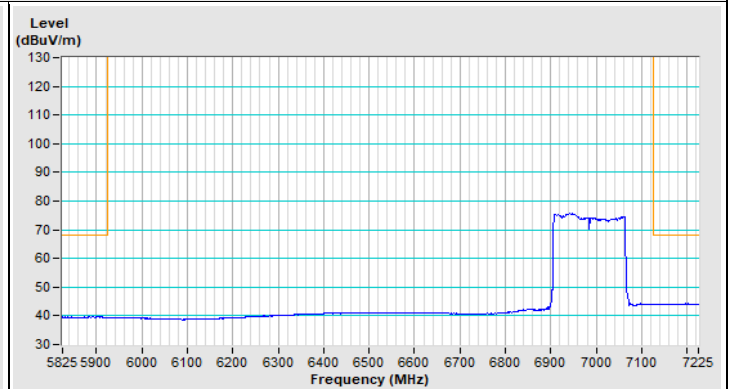

Horizontal (Average)

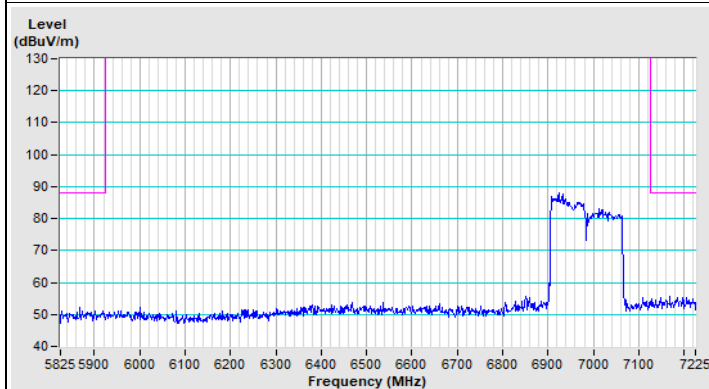


Vertical (Peak)

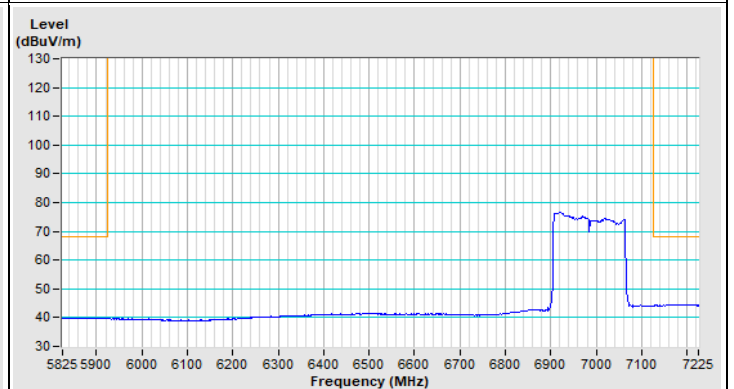


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11ax (HE20) 26-tone RU Channel 233

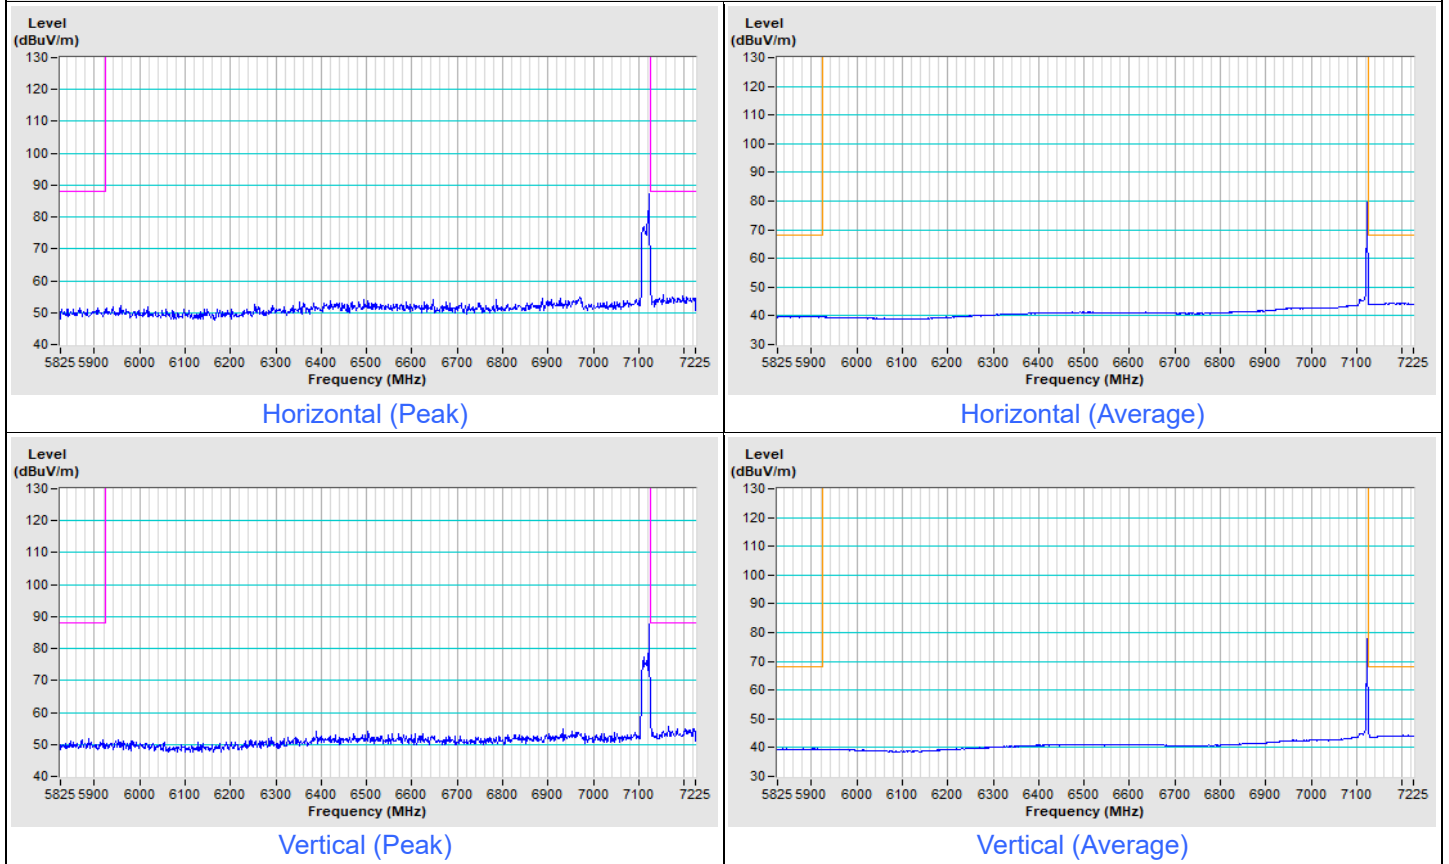


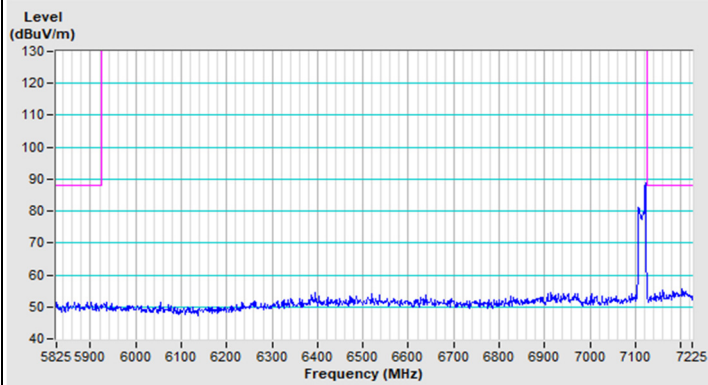802.11ax (HE20) 52-tone RU Channel 233


Horizontal (Peak)

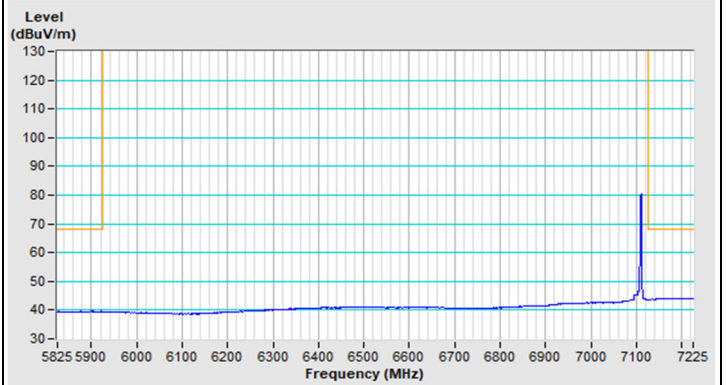


Horizontal (Average)

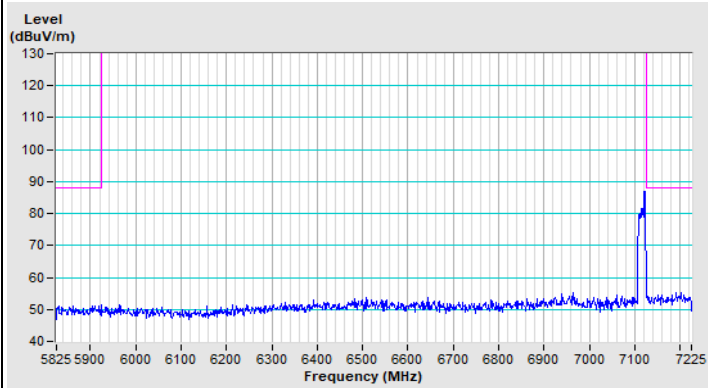


Vertical (Peak)

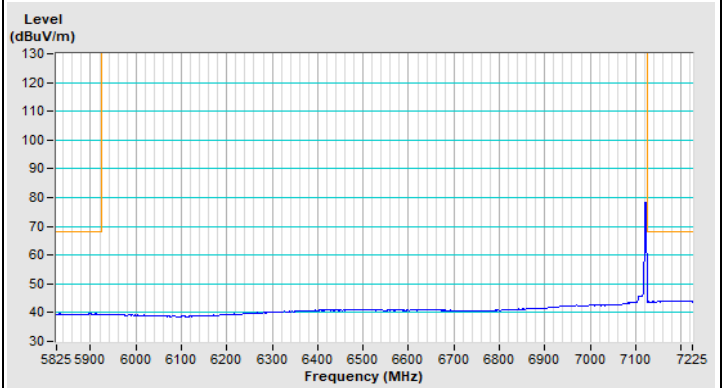


Vertical (Average)

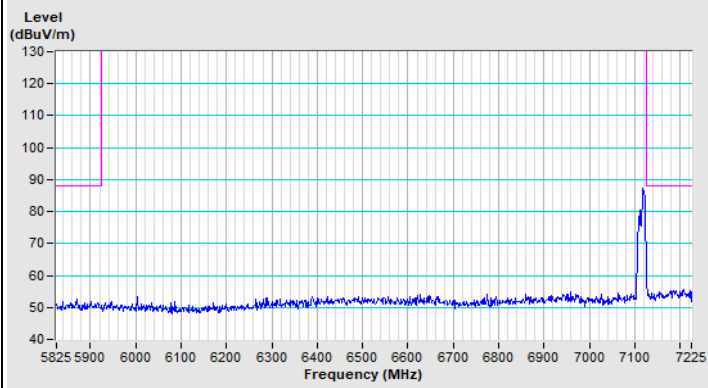802.11ax (HE20) 106-tone RU Channel 233


Horizontal (Peak)

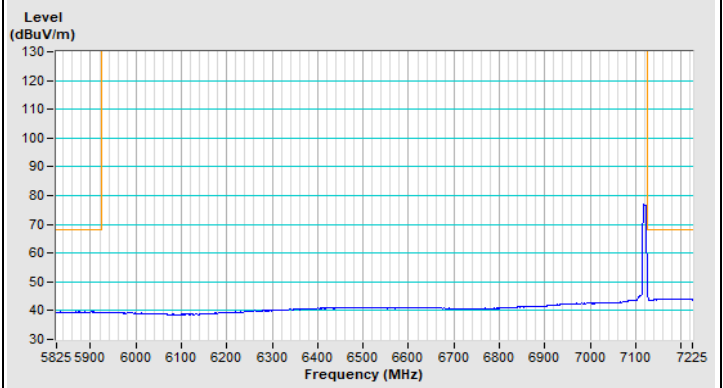

Horizontal (Average)

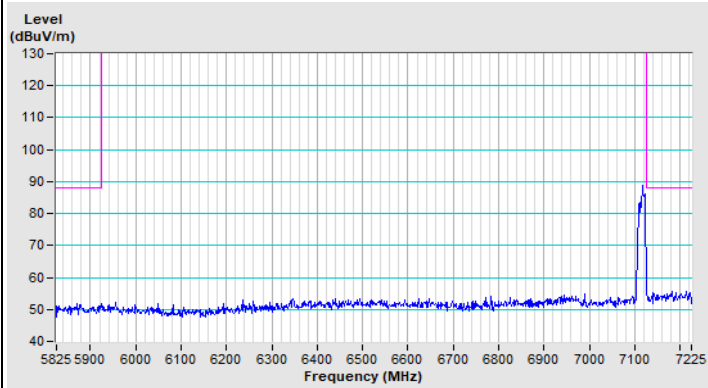


Vertical (Peak)

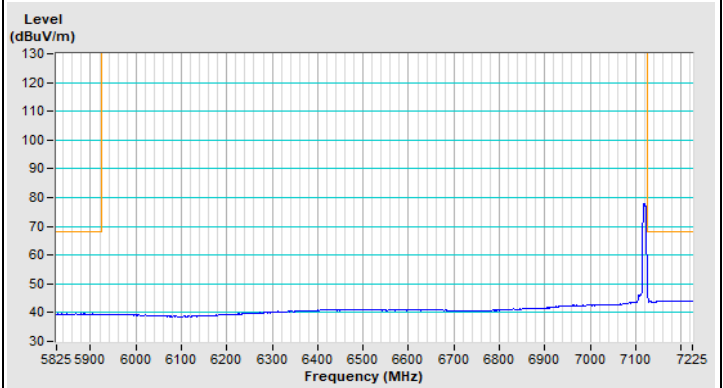


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 233

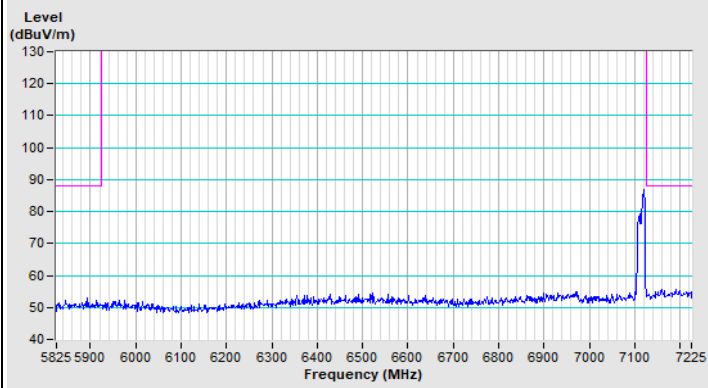


Horizontal (Peak)

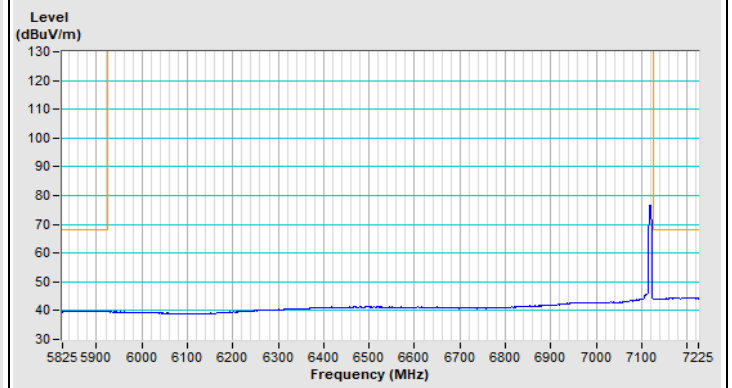

Horizontal (Average)

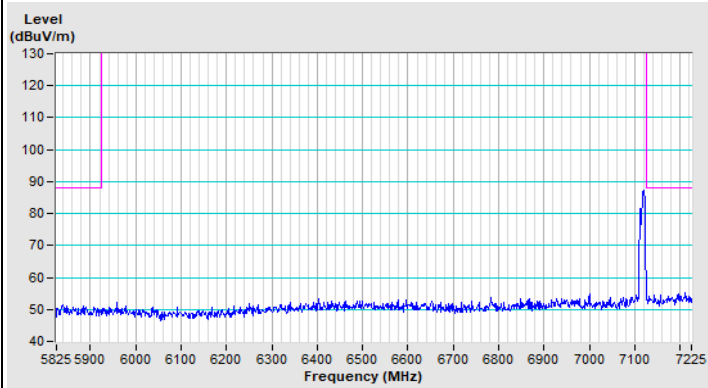


Vertical (Peak)

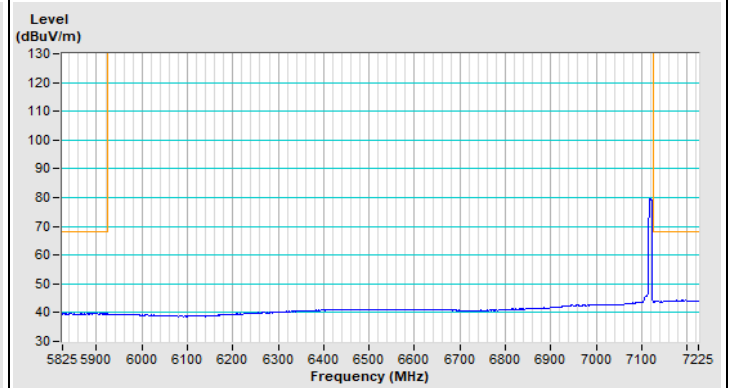


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 233

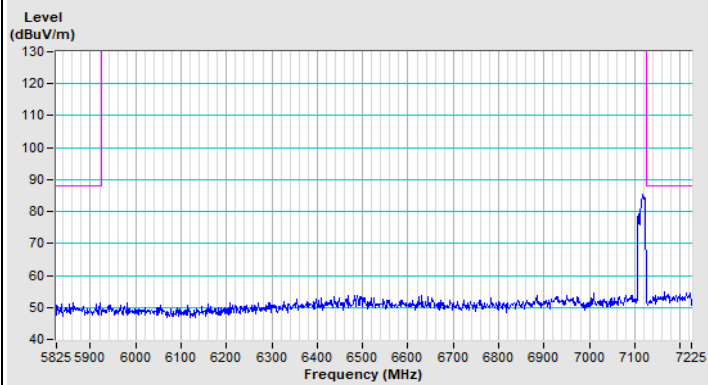


Horizontal (Peak)

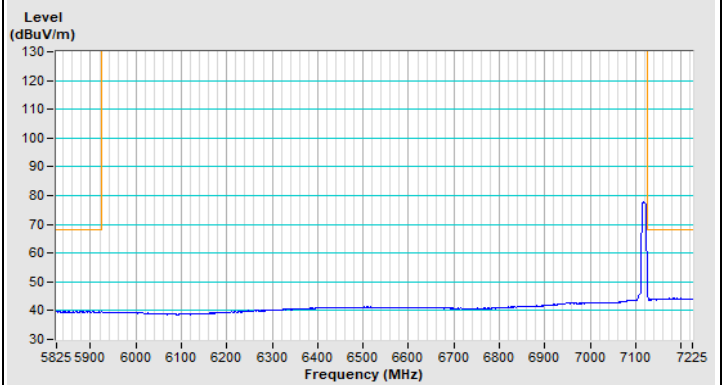

Horizontal (Average)

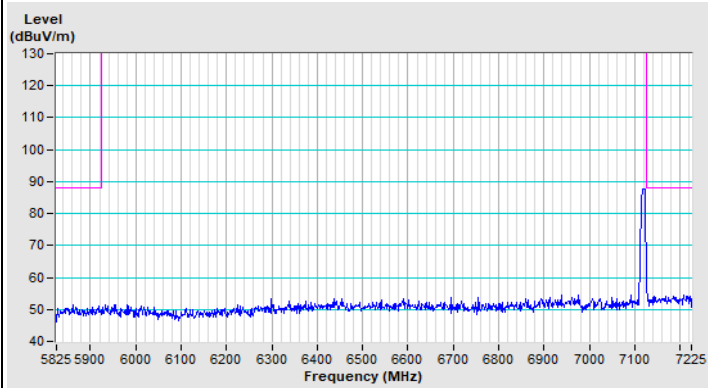


Vertical (Peak)

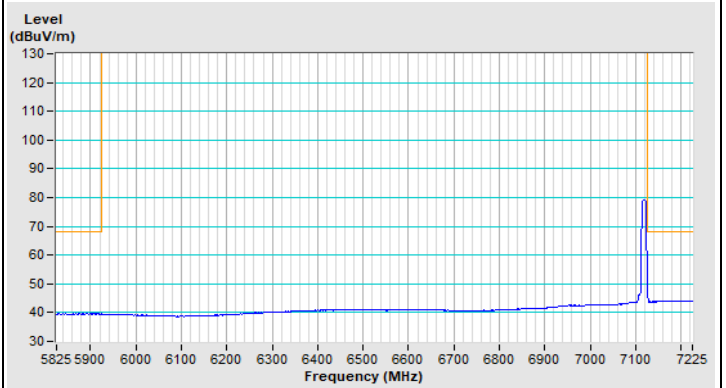

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 215

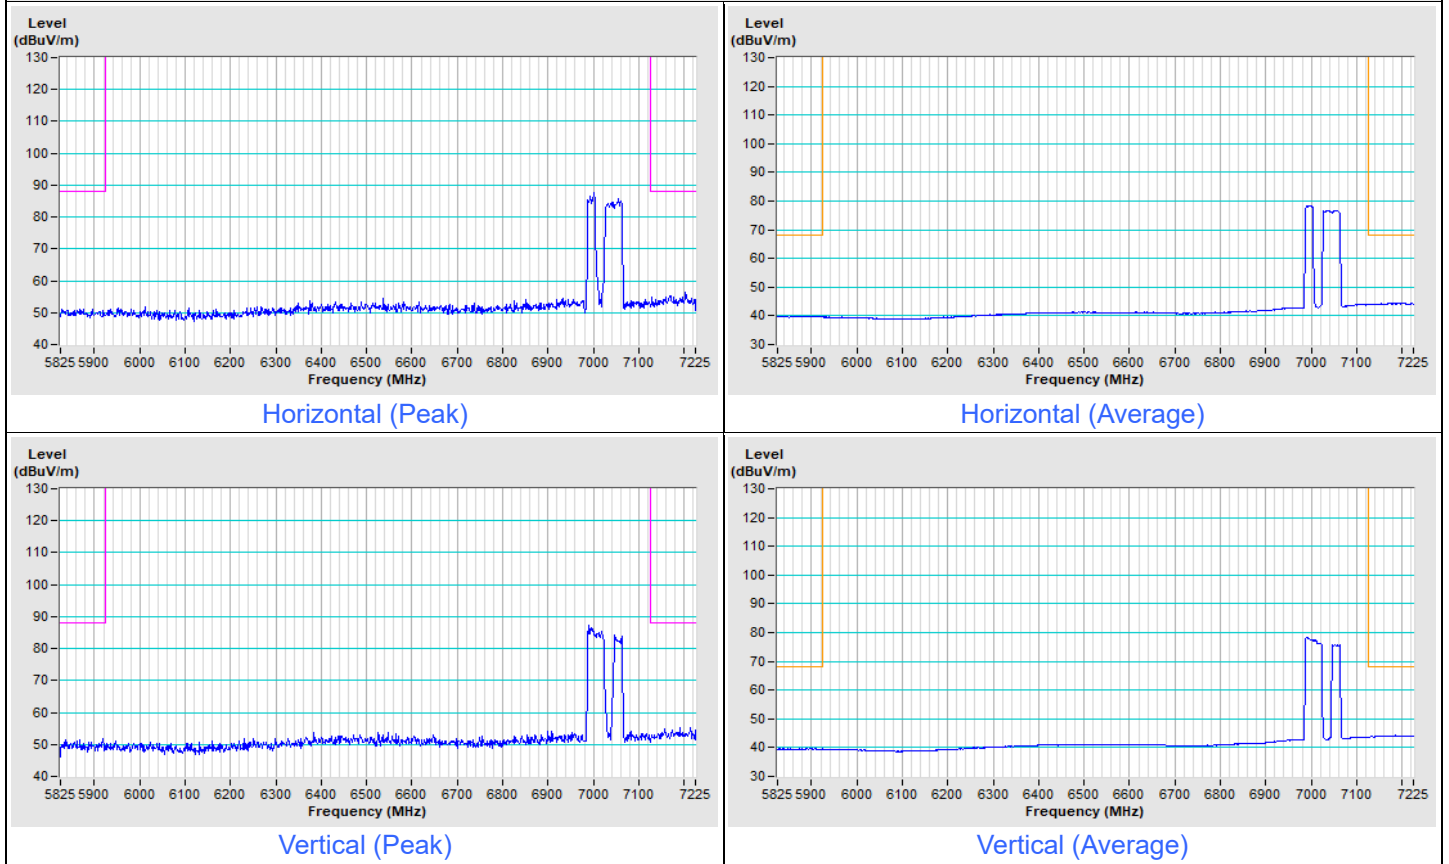


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 207

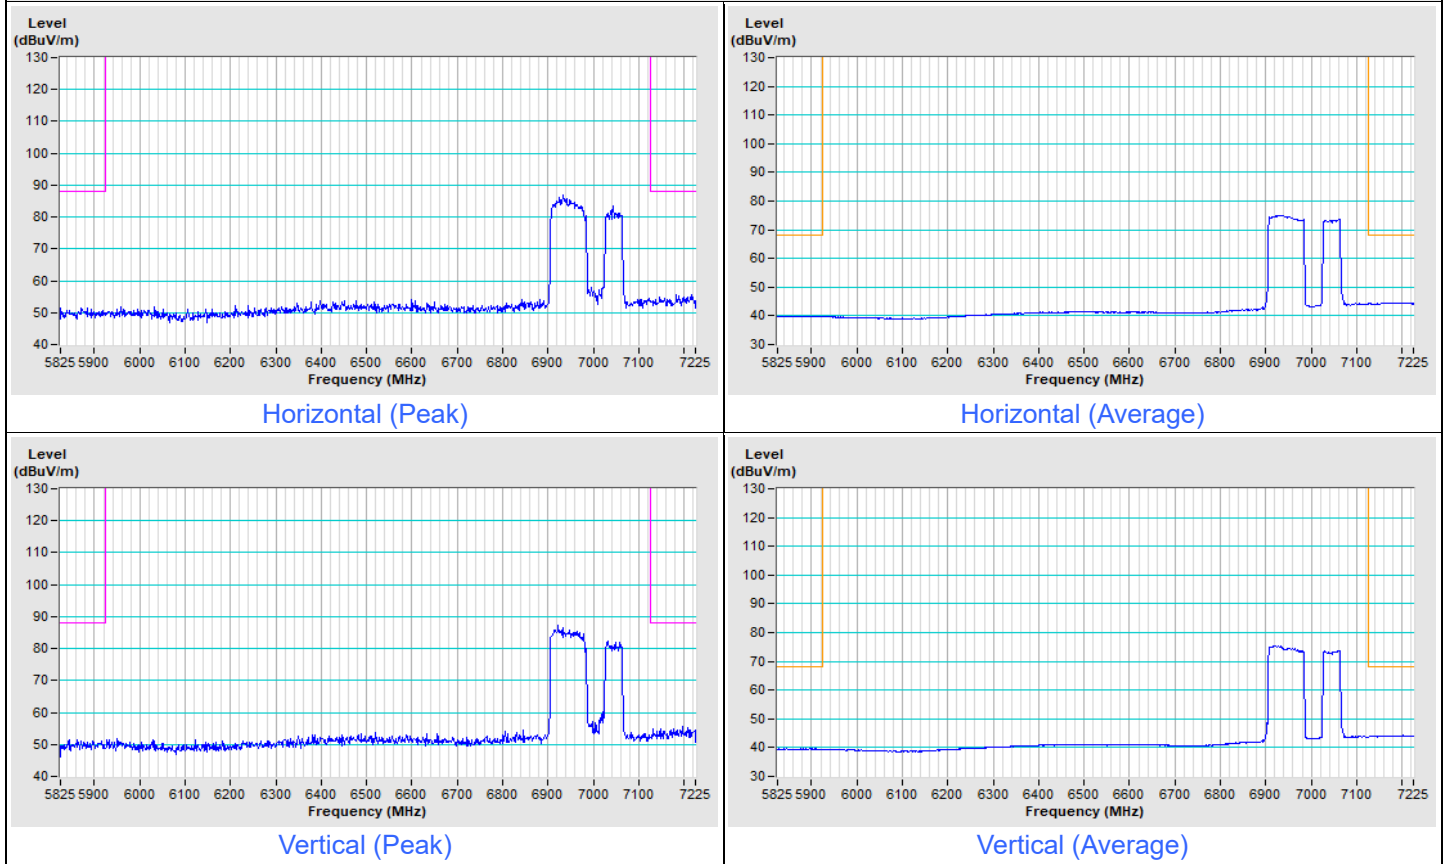


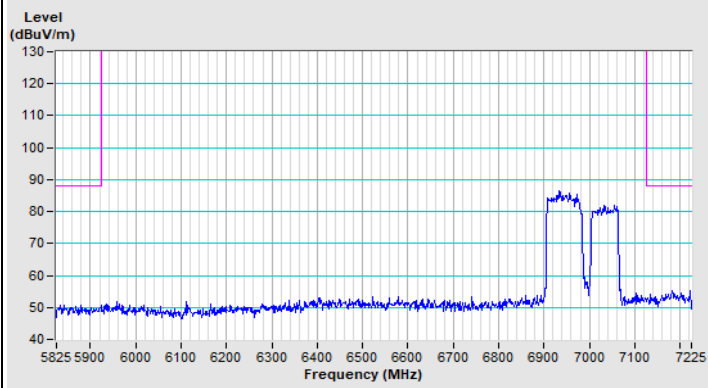802.11be (EHT160) 996+484+242-tone MRU Channel 207


Horizontal (Peak)

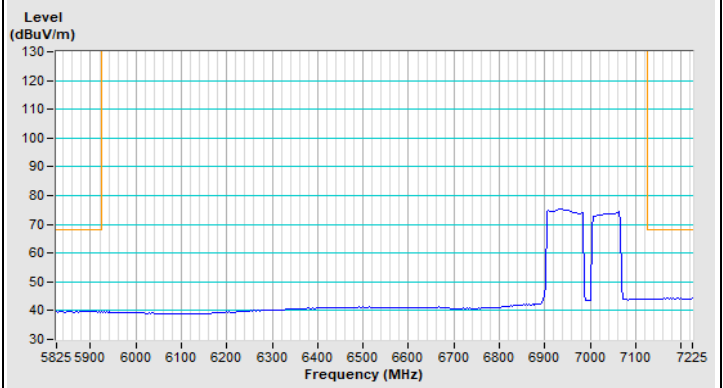

Horizontal (Average)

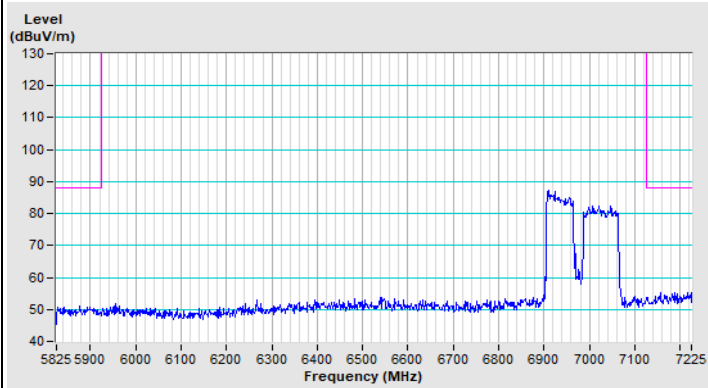

Vertical (Peak)

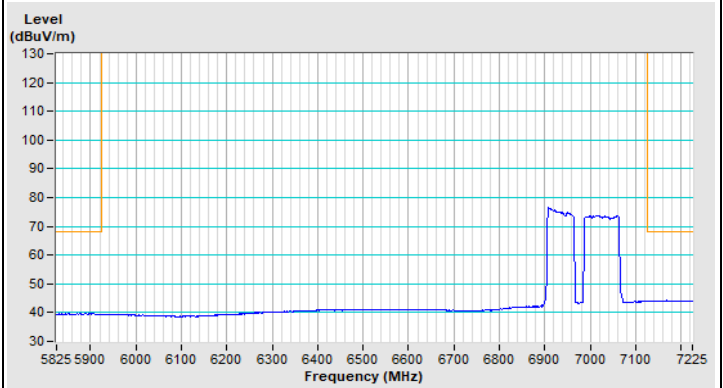

Vertical (Average)

Mode C_1TX

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	84.2 PK			1.35 H	210	77.3	6.9
2	*6435.00	75.5 AV			1.35 H	210	68.6	6.9
3	#12870.00	48.2 PK	88.2	-40.0	1.63 H	276	33.0	15.2
4	#12870.00	37.7 AV	68.2	-30.5	1.63 H	276	22.5	15.2
5	19305.00	49.3 PK	74.0	-24.7	2.58 H	129	53.2	-3.9
6	19305.00	37.8 AV	54.0	-16.2	2.58 H	129	41.7	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.4 PK			1.30 V	82	91.7	4.7
2	*6435.00	86.5 AV			1.30 V	82	81.8	4.7
3	#12870.00	46.7 PK	88.2	-41.5	1.86 V	280	33.9	12.8
4	#12870.00	36.2 AV	68.2	-32.0	1.86 V	280	23.4	12.8
5	19305.00	49.4 PK	74.0	-24.6	2.59 V	189	53.3	-3.9
6	19305.00	38.6 AV	54.0	-15.4	2.59 V	189	42.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	84.2 PK			1.39 H	212	79.3	4.9
2	*6475.00	75.1 AV			1.39 H	212	70.2	4.9
3	#12950.00	47.9 PK	88.2	-40.3	1.64 H	260	35.4	12.5
4	#12950.00	37.2 AV	68.2	-31.0	1.64 H	260	24.7	12.5
5	19425.00	49.0 PK	74.0	-25.0	2.59 H	151	52.5	-3.5
6	19425.00	37.5 AV	54.0	-16.5	2.59 H	151	41.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	96.1 PK			1.28 V	84	91.2	4.9
2	*6475.00	86.4 AV			1.28 V	84	81.5	4.9
3	#12950.00	46.4 PK	88.2	-41.8	1.79 V	263	33.9	12.5
4	#12950.00	36.1 AV	68.2	-32.1	1.79 V	263	23.6	12.5
5	19425.00	49.8 PK	74.0	-24.2	2.63 V	184	53.3	-3.5
6	19425.00	38.9 AV	54.0	-15.1	2.63 V	184	42.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	82.6 PK			1.51 H	210	77.5	5.1
2	*6515.00	73.3 AV			1.51 H	210	68.2	5.1
3	#13030.00	47.7 PK	88.2	-40.5	1.65 H	249	35.4	12.3
4	#13030.00	37.1 AV	68.2	-31.1	1.65 H	249	24.8	12.3
5	19545.00	48.4 PK	74.0	-25.6	2.55 H	135	52.1	-3.7
6	19545.00	37.1 AV	54.0	-16.9	2.55 H	135	40.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.2 PK			1.26 V	85	91.1	5.1
2	*6515.00	86.0 AV			1.26 V	85	80.9	5.1
3	#13030.00	46.1 PK	88.2	-42.1	1.81 V	253	33.8	12.3
4	#13030.00	35.9 AV	68.2	-32.3	1.81 V	253	23.6	12.3
5	19545.00	49.9 PK	74.0	-24.1	2.53 V	161	53.6	-3.7
6	19545.00	38.8 AV	54.0	-15.2	2.53 V	161	42.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	83.8 PK			1.50 H	206	77.9	5.9
2	*6875.00	74.5 AV			1.50 H	206	68.6	5.9
3	#13750.00	47.4 PK	88.2	-40.8	1.74 H	253	33.5	13.9
4	#13750.00	36.9 AV	68.2	-31.3	1.74 H	253	23.0	13.9
5	20625.00	49.4 PK	74.0	-24.6	2.53 H	153	52.7	-3.3
6	20625.00	38.1 AV	54.0	-15.9	2.53 H	153	41.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	95.5 PK			1.22 V	87	89.6	5.9
2	*6875.00	86.4 AV			1.22 V	87	80.5	5.9
3	#13750.00	46.3 PK	88.2	-41.9	1.81 V	255	32.4	13.9
4	#13750.00	36.2 AV	68.2	-32.0	1.81 V	255	22.3	13.9
5	20625.00	49.1 PK	74.0	-24.9	2.58 V	184	52.4	-3.3
6	20625.00	38.2 AV	54.0	-15.8	2.58 V	184	41.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	85.4 PK			1.28 H	193	78.5	6.9
2	*6995.00	75.6 AV			1.28 H	193	68.7	6.9
3	#13990.00	48.1 PK	88.2	-40.1	1.68 H	268	33.6	14.5
4	#13990.00	37.3 AV	68.2	-30.9	1.68 H	268	22.8	14.5
5	20985.00	48.8 PK	74.0	-25.2	2.55 H	139	51.5	-2.7
6	20985.00	37.5 AV	54.0	-16.5	2.55 H	139	40.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	94.7 PK			1.23 V	93	87.8	6.9
2	*6995.00	85.3 AV			1.23 V	93	78.4	6.9
3	#13990.00	46.4 PK	88.2	-41.8	1.83 V	269	31.9	14.5
4	#13990.00	35.8 AV	68.2	-32.4	1.83 V	269	21.3	14.5
5	20985.00	50.0 PK	74.0	-24.0	2.55 V	161	52.7	-2.7
6	20985.00	38.6 AV	54.0	-15.4	2.55 V	161	41.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	85.1 PK			1.50 H	167	77.6	7.5
2	*7115.00	75.9 AV			1.50 H	167	68.4	7.5
3	#7125.00	52.7 PK	88.2	-35.5	1.50 H	167	45.2	7.5
4	#7125.00	43.8 AV	68.2	-24.4	1.50 H	167	36.3	7.5
5	7250.00	54.2 PK	74.0	-19.8	1.50 H	167	46.5	7.7
6	7250.00	42.6 AV	54.0	-11.4	1.50 H	167	34.9	7.7
7	#14230.00	47.9 PK	88.2	-40.3	1.75 H	266	33.3	14.6
8	#14230.00	37.1 AV	68.2	-31.1	1.75 H	266	22.5	14.6
9	21345.00	48.5 PK	74.0	-25.5	2.63 H	135	50.7	-2.2
10	21345.00	37.3 AV	54.0	-16.7	2.63 H	135	39.5	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.9 PK			1.16 V	95	85.4	7.5
2	*7115.00	83.8 AV			1.16 V	95	76.3	7.5
3	#7125.00	54.8 PK	88.2	-33.4	1.16 V	95	47.3	7.5
4	#7125.00	46.9 AV	68.2	-21.3	1.16 V	95	39.4	7.5
5	7250.00	53.9 PK	74.0	-20.1	1.16 V	95	46.2	7.7
6	7250.00	42.7 AV	54.0	-11.3	1.16 V	95	35.0	7.7
7	#14230.00	46.2 PK	88.2	-42.0	1.80 V	253	31.6	14.6
8	#14230.00	35.9 AV	68.2	-32.3	1.80 V	253	21.3	14.6
9	21345.00	49.7 PK	74.0	-24.3	2.58 V	187	51.9	-2.2
10	21345.00	38.6 AV	54.0	-15.4	2.58 V	187	40.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	83.1 PK			1.38 H	212	78.4	4.7
2	*6435.00	74.3 AV			1.38 H	212	69.6	4.7
3	#12870.00	47.6 PK	88.2	-40.6	1.73 H	257	34.8	12.8
4	#12870.00	36.8 AV	68.2	-31.4	1.73 H	257	24.0	12.8
5	19305.00	48.4 PK	74.0	-25.6	2.53 H	140	52.3	-3.9
6	19305.00	37.2 AV	54.0	-16.8	2.53 H	140	41.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	98.1 PK			1.37 V	84	93.4	4.7
2	*6435.00	85.4 AV			1.37 V	84	80.7	4.7
3	#12870.00	46.5 PK	88.2	-41.7	1.87 V	255	33.7	12.8
4	#12870.00	36.0 AV	68.2	-32.2	1.87 V	255	23.2	12.8
5	19305.00	49.7 PK	74.0	-24.3	2.54 V	170	53.6	-3.9
6	19305.00	38.6 AV	54.0	-15.4	2.54 V	170	42.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	82.0 PK			1.41 H	211	77.1	4.9
2	*6475.00	72.2 AV			1.41 H	211	67.3	4.9
3	#12950.00	48.0 PK	88.2	-40.2	1.64 H	264	35.5	12.5
4	#12950.00	37.0 AV	68.2	-31.2	1.64 H	264	24.5	12.5
5	19425.00	49.2 PK	74.0	-24.8	2.60 H	147	52.7	-3.5
6	19425.00	37.9 AV	54.0	-16.1	2.60 H	147	41.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	96.1 PK			1.33 V	87	91.2	4.9
2	*6475.00	84.5 AV			1.33 V	87	79.6	4.9
3	#12950.00	47.0 PK	88.2	-41.2	1.89 V	253	34.5	12.5
4	#12950.00	36.3 AV	68.2	-31.9	1.89 V	253	23.8	12.5
5	19425.00	50.1 PK	74.0	-23.9	2.54 V	160	53.6	-3.5
6	19425.00	38.9 AV	54.0	-15.1	2.54 V	160	42.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	82.8 PK			1.44 H	211	77.7	5.1
2	*6515.00	73.4 AV			1.44 H	211	68.3	5.1
3	#13030.00	48.3 PK	88.2	-39.9	1.73 H	255	36.0	12.3
4	#13030.00	37.6 AV	68.2	-30.6	1.73 H	255	25.3	12.3
5	19545.00	48.3 PK	74.0	-25.7	2.53 H	157	52.0	-3.7
6	19545.00	37.2 AV	54.0	-16.8	2.53 H	157	40.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.3 PK			1.42 V	85	91.2	5.1
2	*6515.00	84.8 AV			1.42 V	85	79.7	5.1
3	#13030.00	46.1 PK	88.2	-42.1	1.90 V	273	33.8	12.3
4	#13030.00	35.8 AV	68.2	-32.4	1.90 V	273	23.5	12.3
5	19545.00	50.1 PK	74.0	-23.9	2.63 V	177	53.8	-3.7
6	19545.00	39.1 AV	54.0	-14.9	2.63 V	177	42.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	82.5 PK			1.48 H	210	76.6	5.9
2	*6875.00	73.3 AV			1.48 H	210	67.4	5.9
3	#13750.00	48.4 PK	88.2	-39.8	1.73 H	255	34.5	13.9
4	#13750.00	37.5 AV	68.2	-30.7	1.73 H	255	23.6	13.9
5	20625.00	48.5 PK	74.0	-25.5	2.53 H	154	51.8	-3.3
6	20625.00	37.3 AV	54.0	-16.7	2.53 H	154	40.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	95.4 PK			1.29 V	91	89.5	5.9
2	*6875.00	84.9 AV			1.29 V	91	79.0	5.9
3	#13750.00	46.2 PK	88.2	-42.0	1.78 V	262	32.3	13.9
4	#13750.00	35.5 AV	68.2	-32.7	1.78 V	262	21.6	13.9
5	20625.00	50.1 PK	74.0	-23.9	2.60 V	186	53.4	-3.3
6	20625.00	38.8 AV	54.0	-15.2	2.60 V	186	42.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	83.2 PK			1.44 H	204	76.3	6.9
2	*6995.00	73.8 AV			1.44 H	204	66.9	6.9
3	#13990.00	48.3 PK	88.2	-39.9	1.74 H	255	33.8	14.5
4	#13990.00	37.2 AV	68.2	-31.0	1.74 H	255	22.7	14.5
5	20985.00	48.2 PK	74.0	-25.8	2.60 H	132	50.9	-2.7
6	20985.00	37.2 AV	54.0	-16.8	2.60 H	132	39.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	97.4 PK			1.14 V	87	90.5	6.9
2	*6995.00	85.4 AV			1.14 V	87	78.5	6.9
3	#13990.00	45.5 PK	88.2	-42.7	1.88 V	270	31.0	14.5
4	#13990.00	35.4 AV	68.2	-32.8	1.88 V	270	20.9	14.5
5	20985.00	49.9 PK	74.0	-24.1	2.64 V	191	52.6	-2.7
6	20985.00	38.6 AV	54.0	-15.4	2.64 V	191	41.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	86.7 PK			1.49 H	165	79.2	7.5
2	*7115.00	75.0 AV			1.49 H	165	67.5	7.5
3	#7125.00	56.2 PK	88.2	-32.0	1.49 H	165	48.7	7.5
4	#7125.00	46.4 AV	68.2	-21.8	1.49 H	165	38.9	7.5
5	7250.00	55.1 PK	74.0	-18.9	1.49 H	165	47.4	7.7
6	7250.00	41.8 AV	54.0	-12.2	1.49 H	165	34.1	7.7
7	#14230.00	48.1 PK	88.2	-40.1	1.64 H	274	33.5	14.6
8	#14230.00	37.4 AV	68.2	-30.8	1.64 H	274	22.8	14.6
9	21345.00	48.7 PK	74.0	-25.3	2.60 H	160	50.9	-2.2
10	21345.00	37.2 AV	54.0	-16.8	2.60 H	160	39.4	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.7 PK			1.02 V	82	87.2	7.5
2	*7115.00	84.0 AV			1.02 V	82	76.5	7.5
3	#7125.00	59.3 PK	88.2	-28.9	1.02 V	82	51.8	7.5
4	#7125.00	49.3 AV	68.2	-18.9	1.02 V	82	41.8	7.5
5	7250.00	55.6 PK	74.0	-18.4	1.02 V	82	47.9	7.7
6	7250.00	42.2 AV	54.0	-11.8	1.02 V	82	34.5	7.7
7	#14230.00	46.3 PK	88.2	-41.9	1.85 V	271	31.7	14.6
8	#14230.00	36.1 AV	68.2	-32.1	1.85 V	271	21.5	14.6
9	21345.00	49.8 PK	74.0	-24.2	2.54 V	172	52.0	-2.2
10	21345.00	38.7 AV	54.0	-15.3	2.54 V	172	40.9	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	81.4 PK			1.50 H	213	76.7	4.7
2	*6445.00	70.8 AV			1.50 H	213	66.1	4.7
3	#12890.00	48.5 PK	88.2	-39.7	1.65 H	286	35.6	12.9
4	#12890.00	37.5 AV	68.2	-30.7	1.65 H	286	24.6	12.9
5	19335.00	48.4 PK	74.0	-25.6	2.61 H	153	52.1	-3.7
6	19335.00	37.2 AV	54.0	-16.8	2.61 H	153	40.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	95.8 PK			1.32 V	86	91.1	4.7
2	*6445.00	85.6 AV			1.32 V	86	80.9	4.7
3	#12890.00	46.4 PK	88.2	-41.8	1.79 V	277	33.5	12.9
4	#12890.00	35.7 AV	68.2	-32.5	1.79 V	277	22.8	12.9
5	19335.00	49.0 PK	74.0	-25.0	2.61 V	171	52.7	-3.7
6	19335.00	38.1 AV	54.0	-15.9	2.61 V	171	41.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	81.1 PK			1.47 H	217	76.2	4.9
2	*6485.00	70.3 AV			1.47 H	217	65.4	4.9
3	#12970.00	48.0 PK	88.2	-40.2	1.64 H	274	35.5	12.5
4	#12970.00	37.1 AV	68.2	-31.1	1.64 H	274	24.6	12.5
5	19455.00	48.9 PK	74.0	-25.1	2.66 H	145	52.3	-3.4
6	19455.00	37.6 AV	54.0	-16.4	2.66 H	145	41.0	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	96.0 PK			1.40 V	85	91.1	4.9
2	*6485.00	86.2 AV			1.40 V	85	81.3	4.9
3	#12970.00	46.4 PK	88.2	-41.8	1.83 V	260	33.9	12.5
4	#12970.00	36.2 AV	68.2	-32.0	1.83 V	260	23.7	12.5
5	19455.00	49.9 PK	74.0	-24.1	2.62 V	183	53.3	-3.4
6	19455.00	38.9 AV	54.0	-15.1	2.62 V	183	42.3	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	81.4 PK			1.49 H	208	76.2	5.2
2	*6525.00	70.9 AV			1.49 H	208	65.7	5.2
3	#13050.00	48.3 PK	88.2	-39.9	1.64 H	258	35.8	12.5
4	#13050.00	37.7 AV	68.2	-30.5	1.64 H	258	25.2	12.5
5	19575.00	48.2 PK	74.0	-25.8	2.63 H	176	52.0	-3.8
6	19575.00	36.9 AV	54.0	-17.1	2.63 H	176	40.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	96.3 PK			1.30 V	85	91.1	5.2
2	*6525.00	86.0 AV			1.30 V	85	80.8	5.2
3	#13050.00	46.3 PK	88.2	-41.9	1.87 V	273	33.8	12.5
4	#13050.00	35.7 AV	68.2	-32.5	1.87 V	273	23.2	12.5
5	19575.00	49.8 PK	74.0	-24.2	2.64 V	186	53.6	-3.8
6	19575.00	38.4 AV	54.0	-15.6	2.64 V	186	42.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	81.1 PK			1.49 H	212	75.2	5.9
2	*6885.00	70.6 AV			1.49 H	212	64.7	5.9
3	#13770.00	48.1 PK	88.2	-40.1	1.66 H	279	34.0	14.1
4	#13770.00	37.4 AV	68.2	-30.8	1.66 H	279	23.3	14.1
5	20655.00	48.7 PK	74.0	-25.3	2.65 H	157	51.9	-3.2
6	20655.00	37.1 AV	54.0	-16.9	2.65 H	157	40.3	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	94.7 PK			1.22 V	91	88.8	5.9
2	*6885.00	85.5 AV			1.22 V	91	79.6	5.9
3	#13770.00	46.3 PK	88.2	-41.9	1.81 V	253	32.2	14.1
4	#13770.00	36.0 AV	68.2	-32.2	1.81 V	253	21.9	14.1
5	20655.00	50.0 PK	74.0	-24.0	2.54 V	178	53.2	-3.2
6	20655.00	38.7 AV	54.0	-15.3	2.54 V	178	41.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	81.2 PK			1.47 H	217	74.4	6.8
2	*6965.00	70.6 AV			1.47 H	217	63.8	6.8
3	#13930.00	48.2 PK	88.2	-40.0	1.65 H	259	34.1	14.1
4	#13930.00	37.4 AV	68.2	-30.8	1.65 H	259	23.3	14.1
5	20895.00	48.2 PK	74.0	-25.8	2.63 H	174	50.8	-2.6
6	20895.00	36.9 AV	54.0	-17.1	2.63 H	174	39.5	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	94.3 PK			1.21 V	93	87.5	6.8
2	*6965.00	85.3 AV			1.21 V	93	78.5	6.8
3	#13930.00	46.2 PK	88.2	-42.0	1.87 V	244	32.1	14.1
4	#13930.00	35.6 AV	68.2	-32.6	1.87 V	244	21.5	14.1
5	20895.00	50.1 PK	74.0	-23.9	2.59 V	166	52.7	-2.6
6	20895.00	38.7 AV	54.0	-15.3	2.59 V	166	41.3	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	84.6 PK			1.87 H	286	77.2	7.4
2	*7085.00	73.4 AV			1.87 H	286	66.0	7.4
3	#7125.00	54.4 PK	88.2	-33.8	1.87 H	286	46.9	7.5
4	#7125.00	42.5 AV	68.2	-25.7	1.87 H	286	35.0	7.5
5	7250.00	53.9 PK	74.0	-20.1	1.87 H	286	46.2	7.7
6	7250.00	42.3 AV	54.0	-11.7	1.87 H	286	34.6	7.7
7	#14170.00	48.3 PK	88.2	-39.9	1.66 H	269	33.8	14.5
8	#14170.00	37.7 AV	68.2	-30.5	1.66 H	269	23.2	14.5
9	21255.00	48.4 PK	74.0	-25.6	2.61 H	146	50.8	-2.4
10	21255.00	37.2 AV	54.0	-16.8	2.61 H	146	39.6	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	95.5 PK			1.17 V	82	88.1	7.4
2	*7085.00	84.9 AV			1.17 V	82	77.5	7.4
3	#7125.00	54.0 PK	88.2	-34.2	1.17 V	82	46.5	7.5
4	#7125.00	42.4 AV	68.2	-25.8	1.17 V	82	34.9	7.5
5	7250.00	54.1 PK	74.0	-19.9	1.17 V	82	46.4	7.7
6	7250.00	42.3 AV	54.0	-11.7	1.17 V	82	34.6	7.7
7	#14170.00	46.7 PK	88.2	-41.5	1.85 V	255	32.2	14.5
8	#14170.00	36.3 AV	68.2	-31.9	1.85 V	255	21.8	14.5
9	21255.00	50.2 PK	74.0	-23.8	2.49 V	172	52.6	-2.4
10	21255.00	38.9 AV	54.0	-15.1	2.49 V	172	41.3	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	77.3 PK			1.33 H	211	72.5	4.8
2	*6465.00	65.0 AV			1.33 H	211	60.2	4.8
3	#12930.00	48.4 PK	88.2	-39.8	1.64 H	261	35.7	12.7
4	#12930.00	37.9 AV	68.2	-30.3	1.64 H	261	25.2	12.7
5	19395.00	48.6 PK	74.0	-25.4	2.57 H	133	52.1	-3.5
6	19395.00	37.3 AV	54.0	-16.7	2.57 H	133	40.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	96.2 PK			1.44 V	86	91.4	4.8
2	*6465.00	85.9 AV			1.44 V	86	81.1	4.8
3	#12930.00	46.1 PK	88.2	-42.1	1.89 V	276	33.4	12.7
4	#12930.00	35.8 AV	68.2	-32.4	1.89 V	276	23.1	12.7
5	19395.00	49.6 PK	74.0	-24.4	2.54 V	174	53.1	-3.5
6	19395.00	38.4 AV	54.0	-15.6	2.54 V	174	41.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	76.9 PK			1.37 H	211	71.5	5.4
2	*6545.00	65.5 AV			1.37 H	211	60.1	5.4
3	#13090.00	48.1 PK	88.2	-40.1	1.61 H	257	35.6	12.5
4	#13090.00	37.7 AV	68.2	-30.5	1.61 H	257	25.2	12.5
5	19635.00	48.3 PK	74.0	-25.7	2.64 H	152	52.3	-4.0
6	19635.00	37.3 AV	54.0	-16.7	2.64 H	152	41.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	97.0 PK			1.26 V	85	91.6	5.4
2	*6545.00	86.4 AV			1.26 V	85	81.0	5.4
3	#13090.00	46.4 PK	88.2	-41.8	1.81 V	261	33.9	12.5
4	#13090.00	36.1 AV	68.2	-32.1	1.81 V	261	23.6	12.5
5	19635.00	49.6 PK	74.0	-24.4	2.63 V	168	53.6	-4.0
6	19635.00	38.4 AV	54.0	-15.6	2.63 V	168	42.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	77.9 PK			1.60 H	222	72.0	5.9
2	*6865.00	66.7 AV			1.60 H	222	60.8	5.9
3	#13730.00	47.9 PK	88.2	-40.3	1.65 H	282	33.9	14.0
4	#13730.00	37.5 AV	68.2	-30.7	1.65 H	282	23.5	14.0
5	20595.00	47.9 PK	74.0	-26.1	2.63 H	145	51.3	-3.4
6	20595.00	37.0 AV	54.0	-17.0	2.63 H	145	40.4	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	96.7 PK			1.01 V	88	90.8	5.9
2	*6865.00	85.5 AV			1.01 V	88	79.6	5.9
3	#13730.00	46.9 PK	88.2	-41.3	1.85 V	280	32.9	14.0
4	#13730.00	36.3 AV	68.2	-31.9	1.85 V	280	22.3	14.0
5	20595.00	49.7 PK	74.0	-24.3	2.62 V	185	53.1	-3.4
6	20595.00	38.4 AV	54.0	-15.6	2.62 V	185	41.8	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	77.6 PK			1.62 H	232	70.9	6.7
2	*6945.00	66.6 AV			1.62 H	232	59.9	6.7
3	#13890.00	48.1 PK	88.2	-40.1	1.64 H	277	34.1	14.0
4	#13890.00	37.5 AV	68.2	-30.7	1.64 H	277	23.5	14.0
5	20835.00	48.5 PK	74.0	-25.5	2.62 H	146	51.2	-2.7
6	20835.00	37.0 AV	54.0	-17.0	2.62 H	146	39.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	94.0 PK			1.15 V	92	87.3	6.7
2	*6945.00	84.0 AV			1.15 V	92	77.3	6.7
3	#13890.00	46.5 PK	88.2	-41.7	1.89 V	252	32.5	14.0
4	#13890.00	35.9 AV	68.2	-32.3	1.89 V	252	21.9	14.0
5	20835.00	50.2 PK	74.0	-23.8	2.60 V	187	52.9	-2.7
6	20835.00	39.1 AV	54.0	-14.9	2.60 V	187	41.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	88.5 PK			1.28 H	182	81.6	6.9
2	*7025.00	76.6 AV			1.28 H	182	69.7	6.9
3	#7125.00	55.0 PK	88.2	-33.2	1.28 H	182	47.5	7.5
4	#7125.00	42.7 AV	68.2	-25.5	1.28 H	182	35.2	7.5
5	7250.00	53.6 PK	74.0	-20.4	1.28 H	182	45.9	7.7
6	7250.00	42.3 AV	54.0	-11.7	1.28 H	182	34.6	7.7
7	#14050.00	48.2 PK	88.2	-40.0	1.69 H	257	33.6	14.6
8	#14050.00	37.9 AV	68.2	-30.3	1.69 H	257	23.3	14.6
9	21075.00	48.8 PK	74.0	-25.2	2.66 H	144	51.5	-2.7
10	21075.00	37.4 AV	54.0	-16.6	2.66 H	144	40.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	95.4 PK			1.06 V	87	88.5	6.9
2	*7025.00	86.1 AV			1.06 V	87	79.2	6.9
3	#7125.00	56.1 PK	88.2	-32.1	1.06 V	87	48.6	7.5
4	#7125.00	42.3 AV	68.2	-25.9	1.06 V	87	34.8	7.5
5	7250.00	54.3 PK	74.0	-19.7	1.06 V	87	46.6	7.7
6	7250.00	42.1 AV	54.0	-11.9	1.06 V	87	34.4	7.7
7	#14050.00	46.4 PK	88.2	-41.8	1.89 V	266	31.8	14.6
8	#14050.00	36.2 AV	68.2	-32.0	1.89 V	266	21.6	14.6
9	21075.00	49.7 PK	74.0	-24.3	2.58 V	176	52.4	-2.7
10	21075.00	38.7 AV	54.0	-15.3	2.58 V	176	41.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	80.9 PK			1.41 H	212	75.9	5.0
2	*6505.00	71.6 AV			1.41 H	212	66.6	5.0
3	#13010.00	48.7 PK	88.2	-39.5	1.63 H	254	36.4	12.3
4	#13010.00	37.8 AV	68.2	-30.4	1.63 H	254	25.5	12.3
5	19515.00	48.5 PK	74.0	-25.5	2.66 H	161	52.0	-3.5
6	19515.00	37.4 AV	54.0	-16.6	2.66 H	161	40.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	93.1 PK			1.42 V	84	88.1	5.0
2	*6505.00	82.9 AV			1.42 V	84	77.9	5.0
3	#13010.00	46.2 PK	88.2	-42.0	1.86 V	265	33.9	12.3
4	#13010.00	35.8 AV	68.2	-32.4	1.86 V	265	23.5	12.3
5	19515.00	49.8 PK	74.0	-24.2	2.57 V	160	53.3	-3.5
6	19515.00	38.5 AV	54.0	-15.5	2.57 V	160	42.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	81.1 PK			1.46 H	211	75.3	5.8
2	*6825.00	71.7 AV			1.46 H	211	65.9	5.8
3	#13650.00	47.9 PK	88.2	-40.3	1.66 H	270	34.0	13.9
4	#13650.00	37.4 AV	68.2	-30.8	1.66 H	270	23.5	13.9
5	20475.00	48.8 PK	74.0	-25.2	2.64 H	150	51.7	-2.9
6	20475.00	37.5 AV	54.0	-16.5	2.64 H	150	40.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	91.9 PK			1.18 V	88	86.1	5.8
2	*6825.00	82.4 AV			1.18 V	88	76.6	5.8
3	#13650.00	46.8 PK	88.2	-41.4	1.84 V	254	32.9	13.9
4	#13650.00	36.2 AV	68.2	-32.0	1.84 V	254	22.3	13.9
5	20475.00	49.9 PK	74.0	-24.1	2.53 V	176	52.8	-2.9
6	20475.00	38.7 AV	54.0	-15.3	2.53 V	176	41.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	81.4 PK			1.35 H	204	74.5	6.9
2	*6985.00	72.3 AV			1.35 H	204	65.4	6.9
3	#7125.00	56.1 PK	88.2	-32.1	1.35 H	204	48.6	7.5
4	#7125.00	42.7 AV	68.2	-25.5	1.35 H	204	35.2	7.5
5	7250.00	54.8 PK	74.0	-19.2	1.35 H	204	47.1	7.7
6	7250.00	41.8 AV	54.0	-12.2	1.35 H	204	34.1	7.7
7	#13970.00	48.1 PK	88.2	-40.1	1.60 H	260	33.7	14.4
8	#13970.00	37.5 AV	68.2	-30.7	1.60 H	260	23.1	14.4
9	20955.00	48.6 PK	74.0	-25.4	2.61 H	156	51.2	-2.6
10	20955.00	37.6 AV	54.0	-16.4	2.61 H	156	40.2	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	93.0 PK			1.24 V	87	86.1	6.9
2	*6985.00	83.4 AV			1.24 V	87	76.5	6.9
3	#7125.00	55.4 PK	88.2	-32.8	1.24 V	87	47.9	7.5
4	#7125.00	42.6 AV	68.2	-25.6	1.24 V	87	35.1	7.5
5	7250.00	53.9 PK	74.0	-20.1	1.24 V	87	46.2	7.7
6	7250.00	41.9 AV	54.0	-12.1	1.24 V	87	34.2	7.7
7	#13970.00	46.0 PK	88.2	-42.2	1.86 V	268	31.6	14.4
8	#13970.00	35.6 AV	68.2	-32.6	1.86 V	268	21.2	14.4
9	20955.00	49.6 PK	74.0	-24.4	2.62 V	163	52.2	-2.6
10	20955.00	38.3 AV	54.0	-15.7	2.62 V	163	40.9	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	83.4 PK			3.57 H	216	78.7	4.7
2	*6435.00	72.8 AV			3.57 H	216	68.1	4.7
3	#12870.00	47.7 PK	88.2	-40.5	1.72 H	272	34.9	12.8
4	#12870.00	36.9 AV	68.2	-31.3	1.72 H	272	24.1	12.8
5	19305.00	49.1 PK	74.0	-24.9	2.66 H	153	53.0	-3.9
6	19305.00	37.7 AV	54.0	-16.3	2.66 H	153	41.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	94.6 PK			1.47 V	46	89.9	4.7
2	*6435.00	82.9 AV			1.47 V	46	78.2	4.7
3	#12870.00	47.6 PK	88.2	-40.6	1.79 V	253	34.8	12.8
4	#12870.00	37.0 AV	68.2	-31.2	1.79 V	253	24.2	12.8
5	19305.00	49.9 PK	74.0	-24.1	2.60 V	179	53.8	-3.9
6	19305.00	38.3 AV	54.0	-15.7	2.60 V	179	42.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	83.3 PK			3.62 H	201	78.4	4.9
2	*6475.00	72.8 AV			3.62 H	201	67.9	4.9
3	#12950.00	47.9 PK	88.2	-40.3	1.65 H	263	35.4	12.5
4	#12950.00	37.0 AV	68.2	-31.2	1.65 H	263	24.5	12.5
5	19425.00	49.5 PK	74.0	-24.5	2.56 H	129	53.0	-3.5
6	19425.00	38.2 AV	54.0	-15.8	2.56 H	129	41.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	94.8 PK			1.51 V	61	89.9	4.9
2	*6475.00	83.2 AV			1.51 V	61	78.3	4.9
3	#12950.00	47.6 PK	88.2	-40.6	1.82 V	255	35.1	12.5
4	#12950.00	36.7 AV	68.2	-31.5	1.82 V	255	24.2	12.5
5	19425.00	49.4 PK	74.0	-24.6	2.59 V	177	52.9	-3.5
6	19425.00	38.0 AV	54.0	-16.0	2.59 V	177	41.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	83.1 PK			3.54 H	210	78.0	5.1
2	*6515.00	72.8 AV			3.54 H	210	67.7	5.1
3	#13030.00	48.0 PK	88.2	-40.2	1.70 H	264	35.7	12.3
4	#13030.00	37.3 AV	68.2	-30.9	1.70 H	264	25.0	12.3
5	19545.00	49.3 PK	74.0	-24.7	2.61 H	129	53.0	-3.7
6	19545.00	37.8 AV	54.0	-16.2	2.61 H	129	41.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	94.8 PK			1.46 V	60	89.7	5.1
2	*6515.00	83.4 AV			1.46 V	60	78.3	5.1
3	#13030.00	47.5 PK	88.2	-40.7	1.87 V	263	35.2	12.3
4	#13030.00	37.0 AV	68.2	-31.2	1.87 V	263	24.7	12.3
5	19545.00	49.6 PK	74.0	-24.4	2.59 V	174	53.3	-3.7
6	19545.00	38.3 AV	54.0	-15.7	2.59 V	174	42.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	83.2 PK			3.56 H	224	77.3	5.9
2	*6875.00	72.6 AV			3.56 H	224	66.7	5.9
3	#13750.00	48.4 PK	88.2	-39.8	1.63 H	290	34.5	13.9
4	#13750.00	37.4 AV	68.2	-30.8	1.63 H	290	23.5	13.9
5	20625.00	49.6 PK	74.0	-24.4	2.65 H	149	52.9	-3.3
6	20625.00	38.0 AV	54.0	-16.0	2.65 H	149	41.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	95.0 PK			1.50 V	42	89.1	5.9
2	*6875.00	83.2 AV			1.50 V	42	77.3	5.9
3	#13750.00	47.2 PK	88.2	-41.0	1.80 V	264	33.3	13.9
4	#13750.00	36.3 AV	68.2	-31.9	1.80 V	264	22.4	13.9
5	20625.00	49.7 PK	74.0	-24.3	2.63 V	191	53.0	-3.3
6	20625.00	38.4 AV	54.0	-15.6	2.63 V	191	41.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	83.6 PK			3.54 H	229	76.7	6.9
2	*6995.00	73.2 AV			3.54 H	229	66.3	6.9
3	#13990.00	48.7 PK	88.2	-39.5	1.64 H	281	34.2	14.5
4	#13990.00	37.7 AV	68.2	-30.5	1.64 H	281	23.2	14.5
5	20985.00	49.0 PK	74.0	-25.0	2.66 H	151	51.7	-2.7
6	20985.00	37.7 AV	54.0	-16.3	2.66 H	151	40.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	94.5 PK			1.50 V	35	87.6	6.9
2	*6995.00	82.8 AV			1.50 V	35	75.9	6.9
3	#13990.00	47.1 PK	88.2	-41.1	1.90 V	263	32.6	14.5
4	#13990.00	36.2 AV	68.2	-32.0	1.90 V	263	21.7	14.5
5	20985.00	50.6 PK	74.0	-23.4	2.61 V	185	53.3	-2.7
6	20985.00	38.8 AV	54.0	-15.2	2.61 V	185	41.5	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	82.9 PK			1.68 H	46	75.4	7.5
2	*7115.00	74.4 AV			1.68 H	46	66.9	7.5
3	#7125.00	62.1 PK	88.2	-26.1	1.68 H	46	54.6	7.5
4	#7125.00	47.9 AV	68.2	-20.3	1.68 H	46	40.4	7.5
5	7250.00	53.9 PK	74.0	-20.1	1.68 H	46	46.2	7.7
6	7250.00	42.8 AV	54.0	-11.2	1.68 H	46	35.1	7.7
7	#14230.00	48.8 PK	88.2	-39.4	1.66 H	272	34.2	14.6
8	#14230.00	37.8 AV	68.2	-30.4	1.66 H	272	23.2	14.6
9	21345.00	49.7 PK	74.0	-24.3	2.62 H	145	51.9	-2.2
10	21345.00	38.3 AV	54.0	-15.7	2.62 H	145	40.5	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.9 PK			1.49 V	278	86.4	7.5
2	*7115.00	82.7 AV			1.49 V	278	75.2	7.5
3	#7125.00	62.7 PK	88.2	-25.5	1.49 V	278	55.2	7.5
4	#7125.00	51.7 AV	68.2	-16.5	1.49 V	278	44.2	7.5
5	7250.00	53.8 PK	74.0	-20.2	1.49 V	278	46.1	7.7
6	7250.00	42.6 AV	54.0	-11.4	1.49 V	278	34.9	7.7
7	#14230.00	47.5 PK	88.2	-40.7	1.87 V	253	32.9	14.6
8	#14230.00	37.0 AV	68.2	-31.2	1.87 V	253	22.4	14.6
9	21345.00	50.2 PK	74.0	-23.8	2.63 V	174	52.4	-2.2
10	21345.00	38.4 AV	54.0	-15.6	2.63 V	174	40.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	82.8 PK			1.59 H	211	78.1	4.7
2	*6435.00	72.1 AV			1.59 H	211	67.4	4.7
3	#12870.00	49.0 PK	88.2	-39.2	1.70 H	277	36.2	12.8
4	#12870.00	38.2 AV	68.2	-30.0	1.70 H	277	25.4	12.8
5	19305.00	50.1 PK	74.0	-23.9	2.66 H	131	54.0	-3.9
6	19305.00	38.7 AV	54.0	-15.3	2.66 H	131	42.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.6 PK			1.51 V	50	88.9	4.7
2	*6435.00	81.9 AV			1.51 V	50	77.2	4.7
3	#12870.00	46.9 PK	88.2	-41.3	1.85 V	261	34.1	12.8
4	#12870.00	36.4 AV	68.2	-31.8	1.85 V	261	23.6	12.8
5	19305.00	50.0 PK	74.0	-24.0	2.64 V	169	53.9	-3.9
6	19305.00	38.5 AV	54.0	-15.5	2.64 V	169	42.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	83.6 PK			1.37 H	212	78.7	4.9
2	*6475.00	72.4 AV			1.37 H	212	67.5	4.9
3	#12950.00	47.9 PK	88.2	-40.3	1.70 H	276	35.4	12.5
4	#12950.00	37.3 AV	68.2	-30.9	1.70 H	276	24.8	12.5
5	19425.00	49.3 PK	74.0	-24.7	2.66 H	142	52.8	-3.5
6	19425.00	38.0 AV	54.0	-16.0	2.66 H	142	41.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	94.4 PK			1.48 V	60	89.5	4.9
2	*6475.00	82.4 AV			1.48 V	60	77.5	4.9
3	#12950.00	47.0 PK	88.2	-41.2	1.90 V	262	34.5	12.5
4	#12950.00	36.3 AV	68.2	-31.9	1.90 V	262	23.8	12.5
5	19425.00	50.2 PK	74.0	-23.8	2.57 V	178	53.7	-3.5
6	19425.00	38.8 AV	54.0	-15.2	2.57 V	178	42.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	85.8 PK			1.47 H	210	80.7	5.1
2	*6515.00	73.8 AV			1.47 H	210	68.7	5.1
3	#13030.00	48.1 PK	88.2	-40.1	1.68 H	285	35.8	12.3
4	#13030.00	37.6 AV	68.2	-30.6	1.68 H	285	25.3	12.3
5	19545.00	48.9 PK	74.0	-25.1	2.56 H	132	52.6	-3.7
6	19545.00	37.6 AV	54.0	-16.4	2.56 H	132	41.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	94.2 PK			1.50 V	39	89.1	5.1
2	*6515.00	82.2 AV			1.50 V	39	77.1	5.1
3	#13030.00	46.7 PK	88.2	-41.5	1.84 V	234	34.4	12.3
4	#13030.00	36.2 AV	68.2	-32.0	1.84 V	234	23.9	12.3
5	19545.00	50.0 PK	74.0	-24.0	2.53 V	176	53.7	-3.7
6	19545.00	38.7 AV	54.0	-15.3	2.53 V	176	42.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	86.6 PK			1.37 H	207	80.7	5.9
2	*6875.00	75.3 AV			1.37 H	207	69.4	5.9
3	#13750.00	47.8 PK	88.2	-40.4	1.68 H	290	33.9	13.9
4	#13750.00	37.3 AV	68.2	-30.9	1.68 H	290	23.4	13.9
5	20625.00	50.1 PK	74.0	-23.9	2.57 H	149	53.4	-3.3
6	20625.00	38.5 AV	54.0	-15.5	2.57 H	149	41.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	93.7 PK			1.49 V	37	87.8	5.9
2	*6875.00	81.8 AV			1.49 V	37	75.9	5.9
3	#13750.00	47.4 PK	88.2	-40.8	1.88 V	258	33.5	13.9
4	#13750.00	36.6 AV	68.2	-31.6	1.88 V	258	22.7	13.9
5	20625.00	50.1 PK	74.0	-23.9	2.55 V	181	53.4	-3.3
6	20625.00	38.8 AV	54.0	-15.2	2.55 V	181	42.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	86.7 PK			1.46 H	205	79.8	6.9
2	*6995.00	75.8 AV			1.46 H	205	68.9	6.9
3	#13990.00	48.0 PK	88.2	-40.2	1.70 H	267	33.5	14.5
4	#13990.00	37.1 AV	68.2	-31.1	1.70 H	267	22.6	14.5
5	20985.00	49.8 PK	74.0	-24.2	2.66 H	133	52.5	-2.7
6	20985.00	38.3 AV	54.0	-15.7	2.66 H	133	41.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	93.3 PK			1.51 V	60	86.4	6.9
2	*6995.00	81.5 AV			1.51 V	60	74.6	6.9
3	#13990.00	47.5 PK	88.2	-40.7	1.80 V	241	33.0	14.5
4	#13990.00	36.9 AV	68.2	-31.3	1.80 V	241	22.4	14.5
5	20985.00	50.0 PK	74.0	-24.0	2.62 V	166	52.7	-2.7
6	20985.00	38.3 AV	54.0	-15.7	2.62 V	166	41.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	85.2 PK			3.58 H	223	77.7	7.5
2	*7115.00	75.2 AV			3.58 H	223	67.7	7.5
3	#7125.00	56.5 PK	88.2	-31.7	3.58 H	223	49.0	7.5
4	#7125.00	46.6 AV	68.2	-21.6	3.58 H	223	39.1	7.5
5	7250.00	46.9 PK	74.0	-27.1	3.58 H	223	39.2	7.7
6	7250.00	35.7 AV	54.0	-18.3	3.58 H	223	28.0	7.7
7	#14230.00	48.4 PK	88.2	-39.8	1.69 H	280	33.8	14.6
8	#14230.00	37.4 AV	68.2	-30.8	1.69 H	280	22.8	14.6
9	21345.00	48.8 PK	74.0	-25.2	2.60 H	134	51.0	-2.2
10	21345.00	37.7 AV	54.0	-16.3	2.60 H	134	39.9	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.8 PK			1.51 V	277	87.3	7.5
2	*7115.00	83.8 AV			1.51 V	277	76.3	7.5
3	#7125.00	62.9 PK	88.2	-25.3	1.51 V	277	55.4	7.5
4	#7125.00	52.2 AV	68.2	-16.0	1.51 V	277	44.7	7.5
5	7250.00	54.7 PK	74.0	-19.3	1.51 V	277	47.0	7.7
6	7250.00	42.5 AV	54.0	-11.5	1.51 V	277	34.8	7.7
7	#14230.00	47.1 PK	88.2	-41.1	1.82 V	233	32.5	14.6
8	#14230.00	36.5 AV	68.2	-31.7	1.82 V	233	21.9	14.6
9	21345.00	50.4 PK	74.0	-23.6	2.65 V	157	52.6	-2.2
10	21345.00	38.6 AV	54.0	-15.4	2.65 V	157	40.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	85.9 PK			1.68 H	212	81.2	4.7
2	*6435.00	73.1 AV			1.68 H	212	68.4	4.7
3	#12870.00	47.9 PK	88.2	-40.3	1.67 H	271	35.1	12.8
4	#12870.00	37.3 AV	68.2	-30.9	1.67 H	271	24.5	12.8
5	19305.00	48.9 PK	74.0	-25.1	2.58 H	148	52.8	-3.9
6	19305.00	37.7 AV	54.0	-16.3	2.58 H	148	41.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	95.9 PK			1.48 V	46	91.2	4.7
2	*6435.00	84.4 AV			1.48 V	46	79.7	4.7
3	#12870.00	47.5 PK	88.2	-40.7	1.89 V	250	34.7	12.8
4	#12870.00	36.9 AV	68.2	-31.3	1.89 V	250	24.1	12.8
5	19305.00	49.6 PK	74.0	-24.4	2.64 V	183	53.5	-3.9
6	19305.00	38.0 AV	54.0	-16.0	2.64 V	183	41.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	84.6 PK			3.51 H	212	79.7	4.9
2	*6475.00	73.2 AV			3.51 H	212	68.3	4.9
3	#12950.00	47.8 PK	88.2	-40.4	1.64 H	286	35.3	12.5
4	#12950.00	37.2 AV	68.2	-31.0	1.64 H	286	24.7	12.5
5	19425.00	48.9 PK	74.0	-25.1	2.56 H	153	52.4	-3.5
6	19425.00	37.6 AV	54.0	-16.4	2.56 H	153	41.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	96.0 PK			1.48 V	58	91.1	4.9
2	*6475.00	84.7 AV			1.48 V	58	79.8	4.9
3	#12950.00	47.6 PK	88.2	-40.6	1.81 V	248	35.1	12.5
4	#12950.00	36.9 AV	68.2	-31.3	1.81 V	248	24.4	12.5
5	19425.00	49.5 PK	74.0	-24.5	2.63 V	172	53.0	-3.5
6	19425.00	38.0 AV	54.0	-16.0	2.63 V	172	41.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	84.7 PK			1.55 H	210	79.6	5.1
2	*6515.00	73.3 AV			1.55 H	210	68.2	5.1
3	#13030.00	47.7 PK	88.2	-40.5	1.66 H	273	35.4	12.3
4	#13030.00	37.2 AV	68.2	-31.0	1.66 H	273	24.9	12.3
5	19545.00	49.2 PK	74.0	-24.8	2.55 H	129	52.9	-3.7
6	19545.00	37.6 AV	54.0	-16.4	2.55 H	129	41.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	95.4 PK			1.45 V	50	90.3	5.1
2	*6515.00	84.1 AV			1.45 V	50	79.0	5.1
3	#13030.00	47.5 PK	88.2	-40.7	1.80 V	259	35.2	12.3
4	#13030.00	36.9 AV	68.2	-31.3	1.80 V	259	24.6	12.3
5	19545.00	49.6 PK	74.0	-24.4	2.60 V	183	53.3	-3.7
6	19545.00	38.1 AV	54.0	-15.9	2.60 V	183	41.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	87.8 PK			1.75 H	223	81.9	5.9
2	*6875.00	75.2 AV			1.75 H	223	69.3	5.9
3	#13750.00	48.2 PK	88.2	-40.0	1.60 H	261	34.3	13.9
4	#13750.00	37.4 AV	68.2	-30.8	1.60 H	261	23.5	13.9
5	20625.00	49.9 PK	74.0	-24.1	2.58 H	132	53.2	-3.3
6	20625.00	38.4 AV	54.0	-15.6	2.58 H	132	41.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	95.7 PK			1.45 V	58	89.8	5.9
2	*6875.00	84.0 AV			1.45 V	58	78.1	5.9
3	#13750.00	46.7 PK	88.2	-41.5	1.86 V	264	32.8	13.9
4	#13750.00	36.2 AV	68.2	-32.0	1.86 V	264	22.3	13.9
5	20625.00	50.0 PK	74.0	-24.0	2.55 V	185	53.3	-3.3
6	20625.00	38.5 AV	54.0	-15.5	2.55 V	185	41.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	89.1 PK			1.49 H	205	82.2	6.9
2	*6995.00	75.9 AV			1.49 H	205	69.0	6.9
3	#13990.00	47.5 PK	88.2	-40.7	1.61 H	277	33.0	14.5
4	#13990.00	37.0 AV	68.2	-31.2	1.61 H	277	22.5	14.5
5	20985.00	49.5 PK	74.0	-24.5	2.60 H	151	52.2	-2.7
6	20985.00	38.0 AV	54.0	-16.0	2.60 H	151	40.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	96.3 PK			1.50 V	53	89.4	6.9
2	*6995.00	84.6 AV			1.50 V	53	77.7	6.9
3	#13990.00	47.3 PK	88.2	-40.9	1.91 V	234	32.8	14.5
4	#13990.00	36.6 AV	68.2	-31.6	1.91 V	234	22.1	14.5
5	20985.00	50.1 PK	74.0	-23.9	2.63 V	175	52.8	-2.7
6	20985.00	38.6 AV	54.0	-15.4	2.63 V	175	41.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	85.0 PK			1.25 H	181	77.5	7.5
2	*7115.00	74.5 AV			1.25 H	181	67.0	7.5
3	#7125.00	52.4 PK	88.2	-35.8	1.25 H	181	44.9	7.5
4	#7125.00	43.3 AV	68.2	-24.9	1.25 H	181	35.8	7.5
5	7250.00	49.6 PK	74.0	-24.4	1.25 H	181	41.9	7.7
6	7250.00	37.4 AV	54.0	-16.6	1.25 H	181	29.7	7.7
7	#14230.00	48.4 PK	88.2	-39.8	1.63 H	267	33.8	14.6
8	#14230.00	37.6 AV	68.2	-30.6	1.63 H	267	23.0	14.6
9	21345.00	49.4 PK	74.0	-24.6	2.66 H	153	51.6	-2.2
10	21345.00	38.0 AV	54.0	-16.0	2.66 H	153	40.2	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.5 PK			1.51 V	278	86.0	7.5
2	*7115.00	83.1 AV			1.51 V	278	75.6	7.5
3	#7125.00	60.8 PK	88.2	-27.4	1.51 V	278	53.3	7.5
4	#7125.00	51.1 AV	68.2	-17.1	1.51 V	278	43.6	7.5
5	7250.00	54.6 PK	74.0	-19.4	1.51 V	278	46.9	7.7
6	7250.00	42.6 AV	54.0	-11.4	1.51 V	278	34.9	7.7
7	#14230.00	47.7 PK	88.2	-40.5	1.83 V	238	33.1	14.6
8	#14230.00	36.8 AV	68.2	-31.4	1.83 V	238	22.2	14.6
9	21345.00	49.9 PK	74.0	-24.1	2.58 V	193	52.1	-2.2
10	21345.00	38.4 AV	54.0	-15.6	2.58 V	193	40.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	88.2 PK			1.65 H	211	83.5	4.7
2	*6435.00	74.2 AV			1.65 H	211	69.5	4.7
3	#12870.00	47.8 PK	88.2	-40.4	1.71 H	271	35.0	12.8
4	#12870.00	37.3 AV	68.2	-30.9	1.71 H	271	24.5	12.8
5	19305.00	49.2 PK	74.0	-24.8	2.65 H	134	53.1	-3.9
6	19305.00	37.8 AV	54.0	-16.2	2.65 H	134	41.7	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	97.3 PK			1.44 V	48	92.6	4.7
2	*6435.00	84.6 AV			1.44 V	48	79.9	4.7
3	#12870.00	48.1 PK	88.2	-40.1	1.82 V	250	35.3	12.8
4	#12870.00	37.1 AV	68.2	-31.1	1.82 V	250	24.3	12.8
5	19305.00	49.6 PK	74.0	-24.4	2.60 V	193	53.5	-3.9
6	19305.00	38.1 AV	54.0	-15.9	2.60 V	193	42.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	87.9 PK			1.65 H	209	82.8	5.1
2	*6515.00	73.8 AV			1.65 H	209	68.7	5.1
3	#13030.00	48.4 PK	88.2	-39.8	1.66 H	290	36.1	12.3
4	#13030.00	37.9 AV	68.2	-30.3	1.66 H	290	25.6	12.3
5	19545.00	49.3 PK	74.0	-24.7	2.61 H	135	53.0	-3.7
6	19545.00	38.2 AV	54.0	-15.8	2.61 H	135	41.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	97.8 PK			1.41 V	40	92.7	5.1
2	*6515.00	84.9 AV			1.41 V	40	79.8	5.1
3	#13030.00	46.8 PK	88.2	-41.4	1.85 V	264	34.5	12.3
4	#13030.00	36.4 AV	68.2	-31.8	1.85 V	264	24.1	12.3
5	19545.00	49.8 PK	74.0	-24.2	2.58 V	183	53.5	-3.7
6	19545.00	38.5 AV	54.0	-15.5	2.58 V	183	42.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	88.4 PK			1.67 H	215	82.5	5.9
2	*6875.00	74.2 AV			1.67 H	215	68.3	5.9
3	#13750.00	48.4 PK	88.2	-39.8	1.68 H	260	34.5	13.9
4	#13750.00	37.9 AV	68.2	-30.3	1.68 H	260	24.0	13.9
5	20625.00	49.3 PK	74.0	-24.7	2.57 H	155	52.6	-3.3
6	20625.00	37.8 AV	54.0	-16.2	2.57 H	155	41.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	97.0 PK			1.48 V	47	91.1	5.9
2	*6875.00	84.1 AV			1.48 V	47	78.2	5.9
3	#13750.00	46.9 PK	88.2	-41.3	1.83 V	252	33.0	13.9
4	#13750.00	36.5 AV	68.2	-31.7	1.83 V	252	22.6	13.9
5	20625.00	49.8 PK	74.0	-24.2	2.55 V	172	53.1	-3.3
6	20625.00	38.4 AV	54.0	-15.6	2.55 V	172	41.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	85.6 PK			1.52 H	222	78.1	7.5
2	*7115.00	75.4 AV			1.52 H	222	67.9	7.5
3	#7125.00	54.5 PK	88.2	-33.7	1.52 H	222	47.0	7.5
4	#7125.00	42.6 AV	68.2	-25.6	1.52 H	222	35.1	7.5
5	7250.00	56.9 PK	74.0	-17.1	1.52 H	222	49.2	7.7
6	7250.00	40.8 AV	54.0	-13.2	1.52 H	222	33.1	7.7
7	#14230.00	48.3 PK	88.2	-39.9	1.71 H	263	33.7	14.6
8	#14230.00	37.8 AV	68.2	-30.4	1.71 H	263	23.2	14.6
9	21345.00	49.1 PK	74.0	-24.9	2.61 H	155	51.3	-2.2
10	21345.00	37.7 AV	54.0	-16.3	2.61 H	155	39.9	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.7 PK			1.52 V	277	88.2	7.5
2	*7115.00	83.3 AV			1.52 V	277	75.8	7.5
3	#7125.00	55.6 PK	88.2	-32.6	1.52 V	277	48.1	7.5
4	#7125.00	42.2 AV	68.2	-26.0	1.52 V	277	34.7	7.5
5	7250.00	56.4 PK	74.0	-17.6	1.52 V	277	48.7	7.7
6	7250.00	40.6 AV	54.0	-13.4	1.52 V	277	32.9	7.7
7	#14230.00	47.9 PK	88.2	-40.3	1.90 V	251	33.3	14.6
8	#14230.00	36.9 AV	68.2	-31.3	1.90 V	251	22.3	14.6
9	21345.00	49.8 PK	74.0	-24.2	2.56 V	178	52.0	-2.2
10	21345.00	38.4 AV	54.0	-15.6	2.56 V	178	40.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	82.5 PK			1.52 H	211	77.8	4.7
2	*6435.00	70.4 AV			1.52 H	211	65.7	4.7
3	#12870.00	48.6 PK	88.2	-39.6	1.61 H	282	35.8	12.8
4	#12870.00	37.7 AV	68.2	-30.5	1.61 H	282	24.9	12.8
5	19305.00	49.4 PK	74.0	-24.6	2.65 H	146	53.3	-3.9
6	19305.00	37.9 AV	54.0	-16.1	2.65 H	146	41.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.6 PK			1.43 V	93	91.9	4.7
2	*6435.00	84.9 AV			1.43 V	93	80.2	4.7
3	#12870.00	47.8 PK	88.2	-40.4	1.86 V	248	35.0	12.8
4	#12870.00	36.9 AV	68.2	-31.3	1.86 V	248	24.1	12.8
5	19305.00	49.6 PK	74.0	-24.4	2.57 V	188	53.5	-3.9
6	19305.00	38.1 AV	54.0	-15.9	2.57 V	188	42.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	82.3 PK			1.47 H	223	77.2	5.1
2	*6515.00	70.2 AV			1.47 H	223	65.1	5.1
3	#13030.00	47.8 PK	88.2	-40.4	1.69 H	267	35.5	12.3
4	#13030.00	37.0 AV	68.2	-31.2	1.69 H	267	24.7	12.3
5	19545.00	49.0 PK	74.0	-25.0	2.64 H	141	52.7	-3.7
6	19545.00	37.7 AV	54.0	-16.3	2.64 H	141	41.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.6 PK			1.42 V	104	91.5	5.1
2	*6515.00	84.8 AV			1.42 V	104	79.7	5.1
3	#13030.00	47.9 PK	88.2	-40.3	1.88 V	259	35.6	12.3
4	#13030.00	36.9 AV	68.2	-31.3	1.88 V	259	24.6	12.3
5	19545.00	49.5 PK	74.0	-24.5	2.60 V	188	53.2	-3.7
6	19545.00	38.1 AV	54.0	-15.9	2.60 V	188	41.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	82.2 PK			1.51 H	231	76.3	5.9
2	*6875.00	70.0 AV			1.51 H	231	64.1	5.9
3	#13750.00	48.0 PK	88.2	-40.2	1.69 H	261	34.1	13.9
4	#13750.00	37.2 AV	68.2	-31.0	1.69 H	261	23.3	13.9
5	20625.00	48.9 PK	74.0	-25.1	2.62 H	142	52.2	-3.3
6	20625.00	37.5 AV	54.0	-16.5	2.62 H	142	40.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.3 PK			1.47 V	77	90.4	5.9
2	*6875.00	84.6 AV			1.47 V	77	78.7	5.9
3	#13750.00	47.4 PK	88.2	-40.8	1.90 V	251	33.5	13.9
4	#13750.00	36.5 AV	68.2	-31.7	1.90 V	251	22.6	13.9
5	20625.00	50.1 PK	74.0	-23.9	2.52 V	185	53.4	-3.3
6	20625.00	38.6 AV	54.0	-15.4	2.52 V	185	41.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.6 PK			3.77 H	222	82.1	7.5
2	*7115.00	76.9 AV			3.77 H	222	69.4	7.5
3	#7125.00	52.4 PK	88.2	-35.8	3.77 H	222	44.9	7.5
4	#7125.00	43.5 AV	68.2	-24.7	3.77 H	222	36.0	7.5
5	7250.00	40.9 PK	74.0	-33.1	3.77 H	222	33.2	7.7
6	7250.00	38.1 AV	54.0	-15.9	3.77 H	222	30.4	7.7
7	#14230.00	48.4 PK	88.2	-39.8	1.67 H	262	33.8	14.6
8	#14230.00	37.9 AV	68.2	-30.3	1.67 H	262	23.3	14.6
9	21345.00	49.5 PK	74.0	-24.5	2.57 H	147	51.7	-2.2
10	21345.00	37.8 AV	54.0	-16.2	2.57 H	147	40.0	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.9 PK			1.43 V	278	87.4	7.5
2	*7115.00	84.8 AV			1.43 V	278	77.3	7.5
3	#7125.00	63.3 PK	88.2	-24.9	1.43 V	278	55.8	7.5
4	#7125.00	53.2 AV	68.2	-15.0	1.43 V	278	45.7	7.5
5	7250.00	46.8 PK	74.0	-27.2	1.43 V	278	39.1	7.7
6	7250.00	42.7 AV	54.0	-11.3	1.43 V	278	35.0	7.7
7	#14230.00	47.2 PK	88.2	-41.0	1.83 V	252	32.6	14.6
8	#14230.00	36.8 AV	68.2	-31.4	1.83 V	252	22.2	14.6
9	21345.00	49.6 PK	74.0	-24.4	2.60 V	182	51.8	-2.2
10	21345.00	38.2 AV	54.0	-15.8	2.60 V	182	40.4	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	85.7 PK			1.53 H	210	80.9	4.8
2	*6465.00	73.8 AV			1.53 H	210	69.0	4.8
3	#12930.00	47.5 PK	88.2	-40.7	1.66 H	274	34.8	12.7
4	#12930.00	36.9 AV	68.2	-31.3	1.66 H	274	24.2	12.7
5	19395.00	49.9 PK	74.0	-24.1	2.56 H	135	53.4	-3.5
6	19395.00	38.3 AV	54.0	-15.7	2.56 H	135	41.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	97.2 PK			1.09 V	88	92.4	4.8
2	*6465.00	83.4 AV			1.09 V	88	78.6	4.8
3	#12930.00	47.7 PK	88.2	-40.5	1.81 V	237	35.0	12.7
4	#12930.00	36.9 AV	68.2	-31.3	1.81 V	237	24.2	12.7
5	19395.00	49.9 PK	74.0	-24.1	2.63 V	184	53.4	-3.5
6	19395.00	38.4 AV	54.0	-15.6	2.63 V	184	41.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	86.4 PK			1.54 H	204	81.0	5.4
2	*6545.00	74.9 AV			1.54 H	204	69.5	5.4
3	#13090.00	48.0 PK	88.2	-40.2	1.63 H	286	35.5	12.5
4	#13090.00	37.1 AV	68.2	-31.1	1.63 H	286	24.6	12.5
5	19635.00	49.2 PK	74.0	-24.8	2.66 H	152	53.2	-4.0
6	19635.00	38.0 AV	54.0	-16.0	2.66 H	152	42.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	97.7 PK			1.13 V	73	92.3	5.4
2	*6545.00	83.7 AV			1.13 V	73	78.3	5.4
3	#13090.00	46.9 PK	88.2	-41.3	1.88 V	234	34.4	12.5
4	#13090.00	36.2 AV	68.2	-32.0	1.88 V	234	23.7	12.5
5	19635.00	49.6 PK	74.0	-24.4	2.59 V	178	53.6	-4.0
6	19635.00	38.0 AV	54.0	-16.0	2.59 V	178	42.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	86.1 PK			1.49 H	210	80.2	5.9
2	*6865.00	74.2 AV			1.49 H	210	68.3	5.9
3	#13730.00	47.7 PK	88.2	-40.5	1.67 H	285	33.7	14.0
4	#13730.00	37.1 AV	68.2	-31.1	1.67 H	285	23.1	14.0
5	20595.00	49.2 PK	74.0	-24.8	2.55 H	136	52.6	-3.4
6	20595.00	37.6 AV	54.0	-16.4	2.55 H	136	41.0	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	96.8 PK			1.07 V	85	90.9	5.9
2	*6865.00	82.9 AV			1.07 V	85	77.0	5.9
3	#13730.00	47.5 PK	88.2	-40.7	1.91 V	241	33.5	14.0
4	#13730.00	36.8 AV	68.2	-31.4	1.91 V	241	22.8	14.0
5	20595.00	50.2 PK	74.0	-23.8	2.59 V	165	53.6	-3.4
6	20595.00	38.5 AV	54.0	-15.5	2.59 V	165	41.9	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	87.4 PK			2.59 H	223	80.5	6.9
2	*7025.00	75.9 AV			2.59 H	223	69.0	6.9
3	#7125.00	56.1 PK	88.2	-32.1	2.59 H	223	48.6	7.5
4	#7125.00	42.7 AV	68.2	-25.5	2.59 H	223	35.2	7.5
5	7250.00	50.9 PK	74.0	-23.1	2.59 H	223	43.2	7.7
6	7250.00	39.5 AV	54.0	-14.5	2.59 H	223	31.8	7.7
7	#14050.00	48.4 PK	88.2	-39.8	1.62 H	268	33.8	14.6
8	#14050.00	37.7 AV	68.2	-30.5	1.62 H	268	23.1	14.6
9	21075.00	49.2 PK	74.0	-24.8	2.67 H	155	51.9	-2.7
10	21075.00	38.0 AV	54.0	-16.0	2.67 H	155	40.7	-2.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	96.8 PK			3.65 V	278	89.9	6.9
2	*7025.00	85.7 AV			3.65 V	278	78.8	6.9
3	#7125.00	56.6 PK	88.2	-31.6	3.65 V	278	49.1	7.5
4	#7125.00	42.8 AV	68.2	-25.4	3.65 V	278	35.3	7.5
5	7250.00	51.3 PK	74.0	-22.7	3.65 V	278	43.6	7.7
6	7250.00	38.6 AV	54.0	-15.4	3.65 V	278	30.9	7.7
7	#14050.00	47.3 PK	88.2	-40.9	1.90 V	259	32.7	14.6
8	#14050.00	36.5 AV	68.2	-31.7	1.90 V	259	21.9	14.6
9	21075.00	50.2 PK	74.0	-23.8	2.56 V	192	52.9	-2.7
10	21075.00	38.6 AV	54.0	-15.4	2.56 V	192	41.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	84.1 PK			1.39 H	212	79.1	5.0
2	*6505.00	71.6 AV			1.39 H	212	66.6	5.0
3	#13010.00	48.3 PK	88.2	-39.9	1.60 H	277	36.0	12.3
4	#13010.00	37.7 AV	68.2	-30.5	1.60 H	277	25.4	12.3
5	19515.00	49.5 PK	74.0	-24.5	2.56 H	143	53.0	-3.5
6	19515.00	37.8 AV	54.0	-16.2	2.56 H	143	41.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	93.1 PK			1.25 V	45	88.1	5.0
2	*6505.00	81.6 AV			1.25 V	45	76.6	5.0
3	#13010.00	47.3 PK	88.2	-40.9	1.84 V	239	35.0	12.3
4	#13010.00	36.8 AV	68.2	-31.4	1.84 V	239	24.5	12.3
5	19515.00	49.9 PK	74.0	-24.1	2.53 V	178	53.4	-3.5
6	19515.00	38.2 AV	54.0	-15.8	2.53 V	178	41.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	84.4 PK			1.38 H	215	78.6	5.8
2	*6825.00	72.0 AV			1.38 H	215	66.2	5.8
3	#13650.00	47.8 PK	88.2	-40.4	1.66 H	271	33.9	13.9
4	#13650.00	37.0 AV	68.2	-31.2	1.66 H	271	23.1	13.9
5	20475.00	49.6 PK	74.0	-24.4	2.62 H	137	52.5	-2.9
6	20475.00	38.4 AV	54.0	-15.6	2.62 H	137	41.3	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	94.8 PK			1.39 V	47	89.0	5.8
2	*6825.00	83.4 AV			1.39 V	47	77.6	5.8
3	#13650.00	47.0 PK	88.2	-41.2	1.90 V	257	33.1	13.9
4	#13650.00	36.2 AV	68.2	-32.0	1.90 V	257	22.3	13.9
5	20475.00	49.9 PK	74.0	-24.1	2.53 V	180	52.8	-2.9
6	20475.00	38.1 AV	54.0	-15.9	2.53 V	180	41.0	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	85.7 PK			2.73 H	22	78.8	6.9
2	*6985.00	74.5 AV			2.73 H	22	67.6	6.9
3	#7125.00	55.0 PK	88.2	-33.2	2.73 H	22	47.5	7.5
4	#7125.00	42.7 AV	68.2	-25.5	2.73 H	22	35.2	7.5
5	7250.00	56.9 PK	74.0	-17.1	2.73 H	22	49.2	7.7
6	7250.00	44.7 AV	54.0	-9.3	2.73 H	22	37.0	7.7
7	#13970.00	48.1 PK	88.2	-40.1	1.71 H	278	33.7	14.4
8	#13970.00	37.1 AV	68.2	-31.1	1.71 H	278	22.7	14.4
9	20955.00	49.4 PK	74.0	-24.6	2.61 H	129	52.0	-2.6
10	20955.00	38.2 AV	54.0	-15.8	2.61 H	129	40.8	-2.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	94.5 PK			3.76 V	279	87.6	6.9
2	*6985.00	82.3 AV			3.76 V	279	75.4	6.9
3	#7125.00	55.0 PK	88.2	-33.2	3.76 V	279	47.5	7.5
4	#7125.00	43.4 AV	68.2	-24.8	3.76 V	279	35.9	7.5
5	7250.00	57.1 PK	74.0	-16.9	3.76 V	279	49.4	7.7
6	7250.00	45.9 AV	54.0	-8.1	3.76 V	279	38.2	7.7
7	#13970.00	46.9 PK	88.2	-41.3	1.81 V	258	32.5	14.4
8	#13970.00	36.4 AV	68.2	-31.8	1.81 V	258	22.0	14.4
9	20955.00	50.1 PK	74.0	-23.9	2.59 V	194	52.7	-2.6
10	20955.00	38.5 AV	54.0	-15.5	2.59 V	194	41.1	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	83.0 PK			1.41 H	210	78.0	5.0
2	*6505.00	71.4 AV			1.41 H	210	66.4	5.0
3	#13010.00	47.6 PK	88.2	-40.6	1.64 H	290	35.3	12.3
4	#13010.00	37.2 AV	68.2	-31.0	1.64 H	290	24.9	12.3
5	19515.00	49.7 PK	74.0	-24.3	2.60 H	133	53.2	-3.5
6	19515.00	38.4 AV	54.0	-15.6	2.60 H	133	41.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	92.9 PK			1.30 V	49	87.9	5.0
2	*6505.00	80.8 AV			1.30 V	49	75.8	5.0
3	#13010.00	47.8 PK	88.2	-40.4	1.79 V	249	35.5	12.3
4	#13010.00	36.8 AV	68.2	-31.4	1.79 V	249	24.5	12.3
5	19515.00	50.1 PK	74.0	-23.9	2.62 V	172	53.6	-3.5
6	19515.00	38.8 AV	54.0	-15.2	2.62 V	172	42.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	84.4 PK			1.70 H	222	78.6	5.8
2	*6825.00	72.9 AV			1.70 H	222	67.1	5.8
3	#13650.00	48.5 PK	88.2	-39.7	1.62 H	281	34.6	13.9
4	#13650.00	37.5 AV	68.2	-30.7	1.62 H	281	23.6	13.9
5	20475.00	49.6 PK	74.0	-24.4	2.59 H	153	52.5	-2.9
6	20475.00	38.3 AV	54.0	-15.7	2.59 H	153	41.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	96.5 PK			1.19 V	50	90.7	5.8
2	*6825.00	83.5 AV			1.19 V	50	77.7	5.8
3	#13650.00	47.7 PK	88.2	-40.5	1.89 V	253	33.8	13.9
4	#13650.00	36.8 AV	68.2	-31.4	1.89 V	253	22.9	13.9
5	20475.00	49.4 PK	74.0	-24.6	2.58 V	184	52.3	-2.9
6	20475.00	38.0 AV	54.0	-16.0	2.58 V	184	40.9	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	83.5 PK			3.72 H	224	76.6	6.9
2	*6985.00	72.1 AV			3.72 H	224	65.2	6.9
3	#7125.00	54.6 PK	88.2	-33.6	3.72 H	224	47.1	7.5
4	#7125.00	42.5 AV	68.2	-25.7	3.72 H	224	35.0	7.5
5	7250.00	56.8 PK	74.0	-17.2	3.72 H	224	49.1	7.7
6	7250.00	45.9 AV	54.0	-8.1	3.72 H	224	38.2	7.7
7	#13970.00	48.3 PK	88.2	-39.9	1.71 H	281	33.9	14.4
8	#13970.00	37.6 AV	68.2	-30.6	1.71 H	281	23.2	14.4
9	20955.00	49.2 PK	74.0	-24.8	2.62 H	140	51.8	-2.6
10	20955.00	37.6 AV	54.0	-16.4	2.62 H	140	40.2	-2.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	93.3 PK			1.77 V	275	86.4	6.9
2	*6985.00	81.9 AV			1.77 V	275	75.0	6.9
3	#7125.00	54.5 PK	88.2	-33.7	1.77 V	275	47.0	7.5
4	#7125.00	43.8 AV	68.2	-24.4	1.77 V	275	36.3	7.5
5	7250.00	56.9 PK	74.0	-17.1	1.77 V	275	49.2	7.7
6	7250.00	46.2 AV	54.0	-7.8	1.77 V	275	38.5	7.7
7	#13970.00	47.7 PK	88.2	-40.5	1.90 V	235	33.3	14.4
8	#13970.00	36.8 AV	68.2	-31.4	1.90 V	235	22.4	14.4
9	20955.00	50.2 PK	74.0	-23.8	2.59 V	182	52.8	-2.6
10	20955.00	38.5 AV	54.0	-15.5	2.59 V	182	41.1	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode C_2TX

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	80.5 PK			1.24 H	138	75.8	4.7
2	*6435.00	71.3 AV			1.24 H	138	66.6	4.7
3	#12870.00	48.2 PK	88.2	-40.0	1.57 H	247	35.4	12.8
4	#12870.00	37.7 AV	68.2	-30.5	1.57 H	247	24.9	12.8
5	19305.00	47.8 PK	74.0	-26.2	2.57 H	158	51.7	-3.9
6	19305.00	37.1 AV	54.0	-16.9	2.57 H	158	41.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	94.2 PK			1.50 V	93	89.5	4.7
2	*6435.00	83.7 AV			1.50 V	93	79.0	4.7
3	#12870.00	46.3 PK	88.2	-41.9	1.81 V	276	33.5	12.8
4	#12870.00	35.7 AV	68.2	-32.5	1.81 V	276	22.9	12.8
5	19305.00	49.3 PK	74.0	-24.7	2.67 V	153	53.2	-3.9
6	19305.00	37.9 AV	54.0	-16.1	2.67 V	153	41.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	80.1 PK			1.20 H	132	75.2	4.9
2	*6475.00	71.0 AV			1.20 H	132	66.1	4.9
3	#12950.00	47.8 PK	88.2	-40.4	1.65 H	262	35.3	12.5
4	#12950.00	37.1 AV	68.2	-31.1	1.65 H	262	24.6	12.5
5	19425.00	48.3 PK	74.0	-25.7	2.59 H	170	51.8	-3.5
6	19425.00	37.5 AV	54.0	-16.5	2.59 H	170	41.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	94.5 PK			1.47 V	94	89.6	4.9
2	*6475.00	84.2 AV			1.47 V	94	79.3	4.9
3	#12950.00	46.2 PK	88.2	-42.0	1.90 V	254	33.7	12.5
4	#12950.00	35.7 AV	68.2	-32.5	1.90 V	254	23.2	12.5
5	19425.00	49.2 PK	74.0	-24.8	2.65 V	169	52.7	-3.5
6	19425.00	38.1 AV	54.0	-15.9	2.65 V	169	41.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	80.1 PK			1.23 H	145	75.0	5.1
2	*6515.00	70.9 AV			1.23 H	145	65.8	5.1
3	#13030.00	48.3 PK	88.2	-39.9	1.56 H	258	36.0	12.3
4	#13030.00	37.4 AV	68.2	-30.8	1.56 H	258	25.1	12.3
5	19545.00	48.0 PK	74.0	-26.0	2.59 H	168	51.7	-3.7
6	19545.00	37.3 AV	54.0	-16.7	2.59 H	168	41.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	94.8 PK			1.45 V	87	89.7	5.1
2	*6515.00	84.0 AV			1.45 V	87	78.9	5.1
3	#13030.00	45.4 PK	88.2	-42.8	1.82 V	254	33.1	12.3
4	#13030.00	35.2 AV	68.2	-33.0	1.82 V	254	22.9	12.3
5	19545.00	49.4 PK	74.0	-24.6	2.59 V	160	53.1	-3.7
6	19545.00	37.9 AV	54.0	-16.1	2.59 V	160	41.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	81.2 PK			1.22 H	147	75.3	5.9
2	*6875.00	71.7 AV			1.22 H	147	65.8	5.9
3	#13750.00	48.4 PK	88.2	-39.8	1.61 H	256	34.5	13.9
4	#13750.00	37.6 AV	68.2	-30.6	1.61 H	256	23.7	13.9
5	20625.00	48.5 PK	74.0	-25.5	2.64 H	140	51.8	-3.3
6	20625.00	37.2 AV	54.0	-16.8	2.64 H	140	40.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	93.9 PK			1.50 V	82	88.0	5.9
2	*6875.00	83.2 AV			1.50 V	82	77.3	5.9
3	#13750.00	46.0 PK	88.2	-42.2	1.89 V	262	32.1	13.9
4	#13750.00	35.7 AV	68.2	-32.5	1.89 V	262	21.8	13.9
5	20625.00	49.2 PK	74.0	-24.8	2.66 V	175	52.5	-3.3
6	20625.00	38.1 AV	54.0	-15.9	2.66 V	175	41.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	80.9 PK			1.28 H	135	74.0	6.9
2	*6995.00	71.8 AV			1.28 H	135	64.9	6.9
3	#13990.00	47.8 PK	88.2	-40.4	1.60 H	259	33.3	14.5
4	#13990.00	37.4 AV	68.2	-30.8	1.60 H	259	22.9	14.5
5	20985.00	48.6 PK	74.0	-25.4	2.61 H	143	51.3	-2.7
6	20985.00	37.5 AV	54.0	-16.5	2.61 H	143	40.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	94.7 PK			1.54 V	95	87.8	6.9
2	*6995.00	84.2 AV			1.54 V	95	77.3	6.9
3	#13990.00	45.8 PK	88.2	-42.4	1.90 V	266	31.3	14.5
4	#13990.00	35.3 AV	68.2	-32.9	1.90 V	266	20.8	14.5
5	20985.00	49.3 PK	74.0	-24.7	2.66 V	170	52.0	-2.7
6	20985.00	38.2 AV	54.0	-15.8	2.66 V	170	40.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	83.2 PK			1.24 H	196	75.7	7.5
2	*7115.00	74.6 AV			1.24 H	196	67.1	7.5
3	#7125.00	54.5 PK	88.2	-33.7	1.24 H	196	47.0	7.5
4	#7125.00	42.3 AV	68.2	-25.9	1.24 H	196	34.8	7.5
5	7250.00	56.4 PK	74.0	-17.6	1.24 H	196	48.7	7.7
6	7250.00	44.7 AV	54.0	-9.3	1.24 H	196	37.0	7.7
7	#14230.00	48.5 PK	88.2	-39.7	1.59 H	254	33.9	14.6
8	#14230.00	37.9 AV	68.2	-30.3	1.59 H	254	23.3	14.6
9	21345.00	48.5 PK	74.0	-25.5	2.57 H	143	50.7	-2.2
10	21345.00	37.8 AV	54.0	-16.2	2.57 H	143	40.0	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.1 PK			1.70 V	96	85.6	7.5
2	*7115.00	83.8 AV			1.70 V	96	76.3	7.5
3	#7125.00	54.1 PK	88.2	-34.1	1.70 V	96	46.6	7.5
4	#7125.00	42.1 AV	68.2	-26.1	1.70 V	96	34.6	7.5
5	7250.00	55.3 PK	74.0	-18.7	1.70 V	96	47.6	7.7
6	7250.00	43.5 AV	54.0	-10.5	1.70 V	96	35.8	7.7
7	#14230.00	46.2 PK	88.2	-42.0	1.89 V	256	31.6	14.6
8	#14230.00	35.9 AV	68.2	-32.3	1.89 V	256	21.3	14.6
9	21345.00	50.0 PK	74.0	-24.0	2.67 V	159	52.2	-2.2
10	21345.00	38.8 AV	54.0	-15.2	2.67 V	159	41.0	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	85.9 PK			1.33 H	202	81.2	4.7
2	*6435.00	73.3 AV			1.33 H	202	68.6	4.7
3	#12870.00	48.0 PK	88.2	-40.2	1.65 H	267	35.2	12.8
4	#12870.00	37.7 AV	68.2	-30.5	1.65 H	267	24.9	12.8
5	19305.00	48.6 PK	74.0	-25.4	2.59 H	142	52.5	-3.9
6	19305.00	37.5 AV	54.0	-16.5	2.59 H	142	41.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	98.6 PK			1.54 V	97	93.9	4.7
2	*6435.00	86.6 AV			1.54 V	97	81.9	4.7
3	#12870.00	45.7 PK	88.2	-42.5	1.85 V	268	32.9	12.8
4	#12870.00	35.1 AV	68.2	-33.1	1.85 V	268	22.3	12.8
5	19305.00	49.4 PK	74.0	-24.6	2.59 V	156	53.3	-3.9
6	19305.00	38.3 AV	54.0	-15.7	2.59 V	156	42.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	86.2 PK			1.35 H	203	81.3	4.9
2	*6475.00	73.7 AV			1.35 H	203	68.8	4.9
3	#12950.00	48.0 PK	88.2	-40.2	1.63 H	273	35.5	12.5
4	#12950.00	37.4 AV	68.2	-30.8	1.63 H	273	24.9	12.5
5	19425.00	48.6 PK	74.0	-25.4	2.57 H	148	52.1	-3.5
6	19425.00	37.3 AV	54.0	-16.7	2.57 H	148	40.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	98.6 PK			1.51 V	83	93.7	4.9
2	*6475.00	86.7 AV			1.51 V	83	81.8	4.9
3	#12950.00	45.8 PK	88.2	-42.4	1.89 V	255	33.3	12.5
4	#12950.00	35.1 AV	68.2	-33.1	1.89 V	255	22.6	12.5
5	19425.00	50.0 PK	74.0	-24.0	2.60 V	149	53.5	-3.5
6	19425.00	38.5 AV	54.0	-15.5	2.60 V	149	42.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	86.0 PK			1.39 H	191	80.9	5.1
2	*6515.00	73.3 AV			1.39 H	191	68.2	5.1
3	#13030.00	48.2 PK	88.2	-40.0	1.55 H	258	35.9	12.3
4	#13030.00	37.7 AV	68.2	-30.5	1.55 H	258	25.4	12.3
5	19545.00	48.1 PK	74.0	-25.9	2.66 H	146	51.8	-3.7
6	19545.00	37.3 AV	54.0	-16.7	2.66 H	146	41.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	99.0 PK			1.59 V	82	93.9	5.1
2	*6515.00	86.9 AV			1.59 V	82	81.8	5.1
3	#13030.00	45.8 PK	88.2	-42.4	1.82 V	280	33.5	12.3
4	#13030.00	35.3 AV	68.2	-32.9	1.82 V	280	23.0	12.3
5	19545.00	49.5 PK	74.0	-24.5	2.60 V	151	53.2	-3.7
6	19545.00	38.0 AV	54.0	-16.0	2.60 V	151	41.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	85.7 PK			1.38 H	213	79.8	5.9
2	*6875.00	73.0 AV			1.38 H	213	67.1	5.9
3	#13750.00	48.4 PK	88.2	-39.8	1.59 H	249	34.5	13.9
4	#13750.00	37.7 AV	68.2	-30.5	1.59 H	249	23.8	13.9
5	20625.00	48.9 PK	74.0	-25.1	2.64 H	166	52.2	-3.3
6	20625.00	37.7 AV	54.0	-16.3	2.64 H	166	41.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.3 PK			1.53 V	104	93.4	5.9
2	*6875.00	87.1 AV			1.53 V	104	81.2	5.9
3	#13750.00	46.4 PK	88.2	-41.8	1.89 V	265	32.5	13.9
4	#13750.00	36.0 AV	68.2	-32.2	1.89 V	265	22.1	13.9
5	20625.00	49.3 PK	74.0	-24.7	2.66 V	159	52.6	-3.3
6	20625.00	38.0 AV	54.0	-16.0	2.66 V	159	41.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	85.6 PK			1.39 H	216	78.7	6.9
2	*6995.00	73.0 AV			1.39 H	216	66.1	6.9
3	#13990.00	48.2 PK	88.2	-40.0	1.62 H	257	33.7	14.5
4	#13990.00	37.9 AV	68.2	-30.3	1.62 H	257	23.4	14.5
5	20985.00	48.8 PK	74.0	-25.2	2.58 H	155	51.5	-2.7
6	20985.00	37.7 AV	54.0	-16.3	2.58 H	155	40.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	98.8 PK			1.54 V	82	91.9	6.9
2	*6995.00	87.1 AV			1.54 V	82	80.2	6.9
3	#13990.00	46.1 PK	88.2	-42.1	1.83 V	260	31.6	14.5
4	#13990.00	35.9 AV	68.2	-32.3	1.83 V	260	21.4	14.5
5	20985.00	49.5 PK	74.0	-24.5	2.67 V	155	52.2	-2.7
6	20985.00	38.1 AV	54.0	-15.9	2.67 V	155	40.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	87.8 PK			1.36 H	196	80.3	7.5
2	*7115.00	76.5 AV			1.36 H	196	69.0	7.5
3	#7125.00	56.5 PK	88.2	-31.7	1.36 H	196	49.0	7.5
4	#7125.00	46.6 AV	68.2	-21.6	1.36 H	196	39.1	7.5
5	7250.00	53.1 PK	74.0	-20.9	1.36 H	196	45.4	7.7
6	7250.00	41.8 AV	54.0	-12.2	1.36 H	196	34.1	7.7
7	#14230.00	48.0 PK	88.2	-40.2	1.63 H	257	33.4	14.6
8	#14230.00	37.2 AV	68.2	-31.0	1.63 H	257	22.6	14.6
9	21345.00	48.9 PK	74.0	-25.1	2.62 H	168	51.1	-2.2
10	21345.00	37.9 AV	54.0	-16.1	2.62 H	168	40.1	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.1 PK			3.36 V	89	89.6	7.5
2	*7115.00	85.4 AV			3.36 V	89	77.9	7.5
3	#7125.00	64.8 PK	88.2	-23.4	3.36 V	89	57.3	7.5
4	#7125.00	54.2 AV	68.2	-14.0	3.36 V	89	46.7	7.5
5	7250.00	51.6 PK	74.0	-22.4	3.36 V	89	43.9	7.7
6	7250.00	48.9 AV	54.0	-5.1	3.36 V	89	41.2	7.7
7	#14230.00	45.9 PK	88.2	-42.3	1.92 V	258	31.3	14.6
8	#14230.00	35.7 AV	68.2	-32.5	1.92 V	258	21.1	14.6
9	21345.00	49.7 PK	74.0	-24.3	2.60 V	156	51.9	-2.2
10	21345.00	38.4 AV	54.0	-15.6	2.60 V	156	40.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	87.8 PK			1.35 H	202	83.1	4.7
2	*6445.00	74.0 AV			1.35 H	202	69.3	4.7
3	#12890.00	47.7 PK	88.2	-40.5	1.56 H	259	34.8	12.9
4	#12890.00	37.3 AV	68.2	-30.9	1.56 H	259	24.4	12.9
5	19335.00	49.1 PK	74.0	-24.9	2.56 H	151	52.8	-3.7
6	19335.00	38.0 AV	54.0	-16.0	2.56 H	151	41.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	99.4 PK			1.81 V	96	94.7	4.7
2	*6445.00	86.5 AV			1.81 V	96	81.8	4.7
3	#12890.00	46.0 PK	88.2	-42.2	1.90 V	258	33.1	12.9
4	#12890.00	35.4 AV	68.2	-32.8	1.90 V	258	22.5	12.9
5	19335.00	48.9 PK	74.0	-25.1	2.60 V	169	52.6	-3.7
6	19335.00	37.9 AV	54.0	-16.1	2.60 V	169	41.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	87.5 PK			1.32 H	191	82.6	4.9
2	*6485.00	73.8 AV			1.32 H	191	68.9	4.9
3	#12970.00	48.3 PK	88.2	-39.9	1.57 H	256	35.8	12.5
4	#12970.00	37.7 AV	68.2	-30.5	1.57 H	256	25.2	12.5
5	19455.00	48.7 PK	74.0	-25.3	2.58 H	142	52.1	-3.4
6	19455.00	37.5 AV	54.0	-16.5	2.58 H	142	40.9	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	98.8 PK			1.77 V	107	93.9	4.9
2	*6485.00	86.1 AV			1.77 V	107	81.2	4.9
3	#12970.00	46.1 PK	88.2	-42.1	1.84 V	283	33.6	12.5
4	#12970.00	35.7 AV	68.2	-32.5	1.84 V	283	23.2	12.5
5	19455.00	49.5 PK	74.0	-24.5	2.60 V	172	52.9	-3.4
6	19455.00	37.9 AV	54.0	-16.1	2.60 V	172	41.3	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	88.4 PK			1.31 H	195	83.2	5.2
2	*6525.00	74.4 AV			1.31 H	195	69.2	5.2
3	#13050.00	47.5 PK	88.2	-40.7	1.61 H	268	35.0	12.5
4	#13050.00	37.2 AV	68.2	-31.0	1.61 H	268	24.7	12.5
5	19575.00	48.5 PK	74.0	-25.5	2.59 H	143	52.3	-3.8
6	19575.00	37.3 AV	54.0	-16.7	2.59 H	143	41.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	99.3 PK			1.85 V	100	94.1	5.2
2	*6525.00	86.4 AV			1.85 V	100	81.2	5.2
3	#13050.00	46.0 PK	88.2	-42.2	1.82 V	281	33.5	12.5
4	#13050.00	35.9 AV	68.2	-32.3	1.82 V	281	23.4	12.5
5	19575.00	50.0 PK	74.0	-24.0	2.66 V	176	53.8	-3.8
6	19575.00	38.4 AV	54.0	-15.6	2.66 V	176	42.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	87.9 PK			1.34 H	213	82.0	5.9
2	*6885.00	73.8 AV			1.34 H	213	67.9	5.9
3	#13770.00	48.4 PK	88.2	-39.8	1.58 H	257	34.3	14.1
4	#13770.00	37.6 AV	68.2	-30.6	1.58 H	257	23.5	14.1
5	20655.00	48.1 PK	74.0	-25.9	2.67 H	153	51.3	-3.2
6	20655.00	37.3 AV	54.0	-16.7	2.67 H	153	40.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	98.9 PK			1.80 V	91	93.0	5.9
2	*6885.00	86.1 AV			1.80 V	91	80.2	5.9
3	#13770.00	45.7 PK	88.2	-42.5	1.91 V	281	31.6	14.1
4	#13770.00	35.2 AV	68.2	-33.0	1.91 V	281	21.1	14.1
5	20655.00	49.7 PK	74.0	-24.3	2.68 V	167	52.9	-3.2
6	20655.00	38.1 AV	54.0	-15.9	2.68 V	167	41.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	87.6 PK			1.36 H	190	80.8	6.8
2	*6965.00	74.1 AV			1.36 H	190	67.3	6.8
3	#13930.00	48.3 PK	88.2	-39.9	1.66 H	269	34.2	14.1
4	#13930.00	38.0 AV	68.2	-30.2	1.66 H	269	23.9	14.1
5	20895.00	49.1 PK	74.0	-24.9	2.57 H	141	51.7	-2.6
6	20895.00	37.9 AV	54.0	-16.1	2.57 H	141	40.5	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	99.6 PK			1.87 V	102	92.8	6.8
2	*6965.00	86.9 AV			1.87 V	102	80.1	6.8
3	#13930.00	45.6 PK	88.2	-42.6	1.87 V	254	31.5	14.1
4	#13930.00	35.4 AV	68.2	-32.8	1.87 V	254	21.3	14.1
5	20895.00	49.8 PK	74.0	-24.2	2.62 V	173	52.4	-2.6
6	20895.00	38.3 AV	54.0	-15.7	2.62 V	173	40.9	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	88.9 PK			1.03 H	209	81.5	7.4
2	*7085.00	77.6 AV			1.03 H	209	70.2	7.4
3	#7125.00	54.3 PK	88.2	-33.9	1.03 H	209	46.8	7.5
4	#7125.00	41.6 AV	68.2	-26.6	1.03 H	209	34.1	7.5
5	7250.00	55.1 PK	74.0	-18.9	1.03 H	209	47.4	7.7
6	7250.00	40.7 AV	54.0	-13.3	1.03 H	209	33.0	7.7
7	#14170.00	48.5 PK	88.2	-39.7	1.60 H	244	34.0	14.5
8	#14170.00	37.7 AV	68.2	-30.5	1.60 H	244	23.2	14.5
9	21255.00	48.1 PK	74.0	-25.9	2.62 H	164	50.5	-2.4
10	21255.00	37.3 AV	54.0	-16.7	2.62 H	164	39.7	-2.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	98.8 PK			3.33 V	95	91.4	7.4
2	*7085.00	86.6 AV			3.33 V	95	79.2	7.4
3	#7125.00	54.8 PK	88.2	-33.4	3.33 V	95	47.3	7.5
4	#7125.00	42.3 AV	68.2	-25.9	3.33 V	95	34.8	7.5
5	7250.00	56.9 PK	74.0	-17.1	3.33 V	95	49.2	7.7
6	7250.00	43.9 AV	54.0	-10.1	3.33 V	95	36.2	7.7
7	#14170.00	46.0 PK	88.2	-42.2	1.89 V	265	31.5	14.5
8	#14170.00	35.5 AV	68.2	-32.7	1.89 V	265	21.0	14.5
9	21255.00	49.0 PK	74.0	-25.0	2.66 V	178	51.4	-2.4
10	21255.00	38.0 AV	54.0	-16.0	2.66 V	178	40.4	-2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	85.8 PK			1.32 H	203	81.0	4.8
2	*6465.00	73.9 AV			1.32 H	203	69.1	4.8
3	#12930.00	47.7 PK	88.2	-40.5	1.55 H	249	35.0	12.7
4	#12930.00	37.1 AV	68.2	-31.1	1.55 H	249	24.4	12.7
5	19395.00	48.4 PK	74.0	-25.6	2.59 H	156	51.9	-3.5
6	19395.00	37.4 AV	54.0	-16.6	2.59 H	156	40.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	100.4 PK			1.55 V	92	95.6	4.8
2	*6465.00	87.1 AV			1.55 V	92	82.3	4.8
3	#12930.00	45.7 PK	88.2	-42.5	1.88 V	270	33.0	12.7
4	#12930.00	35.5 AV	68.2	-32.7	1.88 V	270	22.8	12.7
5	19395.00	50.0 PK	74.0	-24.0	2.59 V	179	53.5	-3.5
6	19395.00	38.5 AV	54.0	-15.5	2.59 V	179	42.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	86.3 PK			1.37 H	195	80.9	5.4
2	*6545.00	74.1 AV			1.37 H	195	68.7	5.4
3	#13090.00	48.5 PK	88.2	-39.7	1.64 H	251	36.0	12.5
4	#13090.00	37.7 AV	68.2	-30.5	1.64 H	251	25.2	12.5
5	19635.00	48.1 PK	74.0	-25.9	2.58 H	167	52.1	-4.0
6	19635.00	37.3 AV	54.0	-16.7	2.58 H	167	41.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	100.1 PK			1.59 V	96	94.7	5.4
2	*6545.00	86.9 AV			1.59 V	96	81.5	5.4
3	#13090.00	46.6 PK	88.2	-41.6	1.89 V	277	34.1	12.5
4	#13090.00	36.0 AV	68.2	-32.2	1.89 V	277	23.5	12.5
5	19635.00	49.5 PK	74.0	-24.5	2.66 V	159	53.5	-4.0
6	19635.00	38.3 AV	54.0	-15.7	2.66 V	159	42.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	85.8 PK			1.34 H	201	79.9	5.9
2	*6865.00	74.1 AV			1.34 H	201	68.2	5.9
3	#13730.00	48.2 PK	88.2	-40.0	1.64 H	265	34.2	14.0
4	#13730.00	37.5 AV	68.2	-30.7	1.64 H	265	23.5	14.0
5	20595.00	48.5 PK	74.0	-25.5	2.56 H	167	51.9	-3.4
6	20595.00	37.4 AV	54.0	-16.6	2.56 H	167	40.8	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	99.9 PK			1.57 V	101	94.0	5.9
2	*6865.00	86.6 AV			1.57 V	101	80.7	5.9
3	#13730.00	46.2 PK	88.2	-42.0	1.83 V	267	32.2	14.0
4	#13730.00	35.9 AV	68.2	-32.3	1.83 V	267	21.9	14.0
5	20595.00	49.5 PK	74.0	-24.5	2.61 V	148	52.9	-3.4
6	20595.00	38.4 AV	54.0	-15.6	2.61 V	148	41.8	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	85.4 PK			1.34 H	192	78.7	6.7
2	*6945.00	73.4 AV			1.34 H	192	66.7	6.7
3	#13890.00	48.1 PK	88.2	-40.1	1.60 H	245	34.1	14.0
4	#13890.00	37.4 AV	68.2	-30.8	1.60 H	245	23.4	14.0
5	20835.00	48.8 PK	74.0	-25.2	2.64 H	158	51.5	-2.7
6	20835.00	38.0 AV	54.0	-16.0	2.64 H	158	40.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	100.6 PK			1.51 V	93	93.9	6.7
2	*6945.00	87.5 AV			1.51 V	93	80.8	6.7
3	#13890.00	46.1 PK	88.2	-42.1	1.89 V	280	32.1	14.0
4	#13890.00	36.0 AV	68.2	-32.2	1.89 V	280	22.0	14.0
5	20835.00	50.1 PK	74.0	-23.9	2.66 V	179	52.8	-2.7
6	20835.00	38.7 AV	54.0	-15.3	2.66 V	179	41.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	89.4 PK			1.21 H	211	82.5	6.9
2	*7025.00	77.2 AV			1.21 H	211	70.3	6.9
3	#7125.00	53.8 PK	88.2	-34.4	1.21 H	211	46.3	7.5
4	#7125.00	41.6 AV	68.2	-26.6	1.21 H	211	34.1	7.5
5	7250.00	51.3 PK	74.0	-22.7	1.21 H	211	43.6	7.7
6	7250.00	43.2 AV	54.0	-10.8	1.21 H	211	35.5	7.7
7	#14050.00	48.4 PK	88.2	-39.8	1.59 H	265	33.8	14.6
8	#14050.00	38.0 AV	68.2	-30.2	1.59 H	265	23.4	14.6
9	21075.00	48.5 PK	74.0	-25.5	2.57 H	156	51.2	-2.7
10	21075.00	37.6 AV	54.0	-16.4	2.57 H	156	40.3	-2.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	99.8 PK			1.58 V	88	92.9	6.9
2	*7025.00	87.1 AV			1.58 V	88	80.2	6.9
3	#7125.00	54.5 PK	88.2	-33.7	1.58 V	88	47.0	7.5
4	#7125.00	42.2 AV	68.2	-26.0	1.58 V	88	34.7	7.5
5	7250.00	50.7 PK	74.0	-23.3	1.58 V	88	43.0	7.7
6	7250.00	44.1 AV	54.0	-9.9	1.58 V	88	36.4	7.7
7	#14050.00	46.1 PK	88.2	-42.1	1.90 V	263	31.5	14.6
8	#14050.00	35.6 AV	68.2	-32.6	1.90 V	263	21.0	14.6
9	21075.00	49.2 PK	74.0	-24.8	2.68 V	169	51.9	-2.7
10	21075.00	38.1 AV	54.0	-15.9	2.68 V	169	40.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	83.9 PK			1.24 H	147	78.9	5.0
2	*6505.00	71.3 AV			1.24 H	147	66.3	5.0
3	#13010.00	48.7 PK	88.2	-39.5	1.55 H	266	36.4	12.3
4	#13010.00	37.9 AV	68.2	-30.3	1.55 H	266	25.6	12.3
5	19515.00	48.7 PK	74.0	-25.3	2.58 H	163	52.2	-3.5
6	19515.00	37.8 AV	54.0	-16.2	2.58 H	163	41.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	97.0 PK			1.78 V	91	92.0	5.0
2	*6505.00	84.2 AV			1.78 V	91	79.2	5.0
3	#13010.00	46.2 PK	88.2	-42.0	1.91 V	253	33.9	12.3
4	#13010.00	35.8 AV	68.2	-32.4	1.91 V	253	23.5	12.3
5	19515.00	50.2 PK	74.0	-23.8	2.63 V	158	53.7	-3.5
6	19515.00	38.7 AV	54.0	-15.3	2.63 V	158	42.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	84.1 PK			1.30 H	138	78.3	5.8
2	*6825.00	71.4 AV			1.30 H	138	65.6	5.8
3	#13650.00	48.3 PK	88.2	-39.9	1.54 H	264	34.4	13.9
4	#13650.00	37.5 AV	68.2	-30.7	1.54 H	264	23.6	13.9
5	20475.00	48.1 PK	74.0	-25.9	2.66 H	153	51.0	-2.9
6	20475.00	37.2 AV	54.0	-16.8	2.66 H	153	40.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	97.4 PK			1.79 V	77	91.6	5.8
2	*6825.00	84.4 AV			1.79 V	77	78.6	5.8
3	#13650.00	46.3 PK	88.2	-41.9	1.88 V	256	32.4	13.9
4	#13650.00	36.1 AV	68.2	-32.1	1.88 V	256	22.2	13.9
5	20475.00	49.9 PK	74.0	-24.1	2.61 V	150	52.8	-2.9
6	20475.00	38.6 AV	54.0	-15.4	2.61 V	150	41.5	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	86.2 PK			1.22 H	198	79.3	6.9
2	*6985.00	74.2 AV			1.22 H	198	67.3	6.9
3	#7125.00	53.2 PK	88.2	-35.0	1.22 H	198	45.7	7.5
4	#7125.00	41.8 AV	68.2	-26.4	1.22 H	198	34.3	7.5
5	7250.00	50.9 PK	74.0	-23.1	1.22 H	198	43.2	7.7
6	7250.00	43.4 AV	54.0	-10.6	1.22 H	198	35.7	7.7
7	#13970.00	47.9 PK	88.2	-40.3	1.64 H	245	33.5	14.4
8	#13970.00	37.6 AV	68.2	-30.6	1.64 H	245	23.2	14.4
9	20955.00	48.8 PK	74.0	-25.2	2.61 H	159	51.4	-2.6
10	20955.00	37.8 AV	54.0	-16.2	2.61 H	159	40.4	-2.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	99.8 PK			1.52 V	94	92.9	6.9
2	*6985.00	84.9 AV			1.52 V	94	78.0	6.9
3	#7125.00	56.2 PK	88.2	-32.0	1.52 V	94	48.7	7.5
4	#7125.00	43.8 AV	68.2	-24.4	1.52 V	94	36.3	7.5
5	7250.00	52.4 PK	74.0	-21.6	1.52 V	94	44.7	7.7
6	7250.00	40.9 AV	54.0	-13.1	1.52 V	94	33.2	7.7
7	#13970.00	45.6 PK	88.2	-42.6	1.83 V	261	31.2	14.4
8	#13970.00	35.2 AV	68.2	-33.0	1.83 V	261	20.8	14.4
9	20955.00	49.5 PK	74.0	-24.5	2.61 V	167	52.1	-2.6
10	20955.00	38.5 AV	54.0	-15.5	2.61 V	167	41.1	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	82.3 PK			1.30 H	203	77.6	4.7
2	*6435.00	71.0 AV			1.30 H	203	66.3	4.7
3	#12870.00	48.1 PK	88.2	-40.1	1.66 H	275	35.3	12.8
4	#12870.00	37.4 AV	68.2	-30.8	1.66 H	275	24.6	12.8
5	19305.00	49.4 PK	74.0	-24.6	2.61 H	142	53.3	-3.9
6	19305.00	38.0 AV	54.0	-16.0	2.61 H	142	41.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.3 PK			2.13 V	278	91.6	4.7
2	*6435.00	83.9 AV			2.13 V	278	79.2	4.7
3	#12870.00	47.3 PK	88.2	-40.9	1.85 V	250	34.5	12.8
4	#12870.00	36.6 AV	68.2	-31.6	1.85 V	250	23.8	12.8
5	19305.00	49.9 PK	74.0	-24.1	2.58 V	178	53.8	-3.9
6	19305.00	38.4 AV	54.0	-15.6	2.58 V	178	42.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	82.8 PK			2.50 H	201	77.9	4.9
2	*6475.00	70.5 AV			2.50 H	201	65.6	4.9
3	#12950.00	48.9 PK	88.2	-39.3	1.63 H	288	36.4	12.5
4	#12950.00	37.9 AV	68.2	-30.3	1.63 H	288	25.4	12.5
5	19425.00	49.4 PK	74.0	-24.6	2.63 H	145	52.9	-3.5
6	19425.00	37.8 AV	54.0	-16.2	2.63 H	145	41.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	95.4 PK			2.06 V	269	90.5	4.9
2	*6475.00	85.6 AV			2.06 V	269	80.7	4.9
3	#12950.00	47.3 PK	88.2	-40.9	1.84 V	264	34.8	12.5
4	#12950.00	36.8 AV	68.2	-31.4	1.84 V	264	24.3	12.5
5	19425.00	49.9 PK	74.0	-24.1	2.58 V	174	53.4	-3.5
6	19425.00	38.6 AV	54.0	-15.4	2.58 V	174	42.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	84.7 PK			1.25 H	147	79.6	5.1
2	*6515.00	73.0 AV			1.25 H	147	67.9	5.1
3	#13030.00	48.0 PK	88.2	-40.2	1.69 H	268	35.7	12.3
4	#13030.00	37.3 AV	68.2	-30.9	1.69 H	268	25.0	12.3
5	19545.00	49.2 PK	74.0	-24.8	2.65 H	130	52.9	-3.7
6	19545.00	37.8 AV	54.0	-16.2	2.65 H	130	41.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	95.6 PK			1.92 V	97	90.5	5.1
2	*6515.00	83.9 AV			1.92 V	97	78.8	5.1
3	#13030.00	47.1 PK	88.2	-41.1	1.83 V	244	34.8	12.3
4	#13030.00	36.2 AV	68.2	-32.0	1.83 V	244	23.9	12.3
5	19545.00	49.6 PK	74.0	-24.4	2.60 V	192	53.3	-3.7
6	19545.00	38.0 AV	54.0	-16.0	2.60 V	192	41.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	83.3 PK			1.32 H	196	77.4	5.9
2	*6875.00	73.3 AV			1.32 H	196	67.4	5.9
3	#13750.00	48.4 PK	88.2	-39.8	1.72 H	277	34.5	13.9
4	#13750.00	37.7 AV	68.2	-30.5	1.72 H	277	23.8	13.9
5	20625.00	49.0 PK	74.0	-25.0	2.59 H	141	52.3	-3.3
6	20625.00	37.9 AV	54.0	-16.1	2.59 H	141	41.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.8 PK			1.42 V	274	90.9	5.9
2	*6875.00	84.6 AV			1.42 V	274	78.7	5.9
3	#13750.00	47.7 PK	88.2	-40.5	1.91 V	265	33.8	13.9
4	#13750.00	37.0 AV	68.2	-31.2	1.91 V	265	23.1	13.9
5	20625.00	49.7 PK	74.0	-24.3	2.54 V	187	53.0	-3.3
6	20625.00	37.9 AV	54.0	-16.1	2.54 V	187	41.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	86.4 PK			1.15 H	213	79.5	6.9
2	*6995.00	75.9 AV			1.15 H	213	69.0	6.9
3	#13990.00	48.6 PK	88.2	-39.6	1.63 H	274	34.1	14.5
4	#13990.00	37.6 AV	68.2	-30.6	1.63 H	274	23.1	14.5
5	20985.00	49.7 PK	74.0	-24.3	2.64 H	134	52.4	-2.7
6	20985.00	38.2 AV	54.0	-15.8	2.64 H	134	40.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	96.6 PK			1.70 V	91	89.7	6.9
2	*6995.00	84.2 AV			1.70 V	91	77.3	6.9
3	#13990.00	47.4 PK	88.2	-40.8	1.84 V	241	32.9	14.5
4	#13990.00	36.4 AV	68.2	-31.8	1.84 V	241	21.9	14.5
5	20985.00	49.6 PK	74.0	-24.4	2.60 V	176	52.3	-2.7
6	20985.00	37.9 AV	54.0	-16.1	2.60 V	176	40.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	85.1 PK			1.22 H	199	77.6	7.5
2	*7115.00	74.1 AV			1.22 H	199	66.6	7.5
3	#7125.00	55.1 PK	88.2	-33.1	1.22 H	199	47.6	7.5
4	#7125.00	45.4 AV	68.2	-22.8	1.22 H	199	37.9	7.5
5	7250.00	48.9 PK	74.0	-25.1	1.22 H	199	41.2	7.7
6	7250.00	39.8 AV	54.0	-14.2	1.22 H	199	32.1	7.7
7	#14230.00	47.7 PK	88.2	-40.5	1.65 H	287	33.1	14.6
8	#14230.00	36.9 AV	68.2	-31.3	1.65 H	287	22.3	14.6
9	21345.00	49.8 PK	74.0	-24.2	2.55 H	142	52.0	-2.2
10	21345.00	38.1 AV	54.0	-15.9	2.55 H	142	40.3	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.2 PK			3.21 V	85	87.7	7.5
2	*7115.00	82.7 AV			3.21 V	85	75.2	7.5
3	#7125.00	62.8 PK	88.2	-25.4	3.21 V	85	55.3	7.5
4	#7125.00	51.8 AV	68.2	-16.4	3.21 V	85	44.3	7.5
5	7250.00	55.9 PK	74.0	-18.1	3.21 V	85	48.2	7.7
6	7250.00	42.7 AV	54.0	-11.3	3.21 V	85	35.0	7.7
7	#14230.00	46.6 PK	88.2	-41.6	1.81 V	235	32.0	14.6
8	#14230.00	36.1 AV	68.2	-32.1	1.81 V	235	21.5	14.6
9	21345.00	49.6 PK	74.0	-24.4	2.52 V	168	51.8	-2.2
10	21345.00	38.2 AV	54.0	-15.8	2.52 V	168	40.4	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	83.0 PK			1.39 H	202	78.3	4.7
2	*6435.00	71.9 AV			1.39 H	202	67.2	4.7
3	#12870.00	47.6 PK	88.2	-40.6	1.67 H	282	34.8	12.8
4	#12870.00	37.0 AV	68.2	-31.2	1.67 H	282	24.2	12.8
5	19305.00	50.1 PK	74.0	-23.9	2.63 H	137	54.0	-3.9
6	19305.00	38.5 AV	54.0	-15.5	2.63 H	137	42.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	94.2 PK			2.05 V	276	89.5	4.7
2	*6435.00	81.5 AV			2.05 V	276	76.8	4.7
3	#12870.00	47.4 PK	88.2	-40.8	1.80 V	245	34.6	12.8
4	#12870.00	36.8 AV	68.2	-31.4	1.80 V	245	24.0	12.8
5	19305.00	49.8 PK	74.0	-24.2	2.57 V	166	53.7	-3.9
6	19305.00	38.5 AV	54.0	-15.5	2.57 V	166	42.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	83.1 PK			1.36 H	186	78.2	4.9
2	*6475.00	71.7 AV			1.36 H	186	66.8	4.9
3	#12950.00	48.0 PK	88.2	-40.2	1.68 H	281	35.5	12.5
4	#12950.00	37.1 AV	68.2	-31.1	1.68 H	281	24.6	12.5
5	19425.00	48.7 PK	74.0	-25.3	2.56 H	139	52.2	-3.5
6	19425.00	37.5 AV	54.0	-16.5	2.56 H	139	41.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	95.1 PK			1.38 V	280	90.2	4.9
2	*6475.00	83.3 AV			1.38 V	280	78.4	4.9
3	#12950.00	47.9 PK	88.2	-40.3	1.84 V	252	35.4	12.5
4	#12950.00	37.0 AV	68.2	-31.2	1.84 V	252	24.5	12.5
5	19425.00	49.7 PK	74.0	-24.3	2.61 V	178	53.2	-3.5
6	19425.00	38.5 AV	54.0	-15.5	2.61 V	178	42.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	83.4 PK			1.33 H	174	78.3	5.1
2	*6515.00	71.9 AV			1.33 H	174	66.8	5.1
3	#13030.00	48.5 PK	88.2	-39.7	1.65 H	285	36.2	12.3
4	#13030.00	37.6 AV	68.2	-30.6	1.65 H	285	25.3	12.3
5	19545.00	49.5 PK	74.0	-24.5	2.57 H	151	53.2	-3.7
6	19545.00	38.0 AV	54.0	-16.0	2.57 H	151	41.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	95.2 PK			1.39 V	280	90.1	5.1
2	*6515.00	83.5 AV			1.39 V	280	78.4	5.1
3	#13030.00	47.3 PK	88.2	-40.9	1.91 V	266	35.0	12.3
4	#13030.00	36.6 AV	68.2	-31.6	1.91 V	266	24.3	12.3
5	19545.00	50.0 PK	74.0	-24.0	2.55 V	167	53.7	-3.7
6	19545.00	38.3 AV	54.0	-15.7	2.55 V	167	42.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	83.7 PK			1.37 H	189	77.8	5.9
2	*6875.00	72.2 AV			1.37 H	189	66.3	5.9
3	#13750.00	48.4 PK	88.2	-39.8	1.60 H	279	34.5	13.9
4	#13750.00	37.4 AV	68.2	-30.8	1.60 H	279	23.5	13.9
5	20625.00	49.3 PK	74.0	-24.7	2.63 H	142	52.6	-3.3
6	20625.00	38.0 AV	54.0	-16.0	2.63 H	142	41.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.8 PK			1.60 V	90	90.9	5.9
2	*6875.00	85.7 AV			1.60 V	90	79.8	5.9
3	#13750.00	47.1 PK	88.2	-41.1	1.85 V	262	33.2	13.9
4	#13750.00	36.5 AV	68.2	-31.7	1.85 V	262	22.6	13.9
5	20625.00	49.3 PK	74.0	-24.7	2.59 V	164	52.6	-3.3
6	20625.00	37.9 AV	54.0	-16.1	2.59 V	164	41.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	83.3 PK			1.41 H	192	76.4	6.9
2	*6995.00	71.8 AV			1.41 H	192	64.9	6.9
3	#13990.00	48.2 PK	88.2	-40.0	1.63 H	285	33.7	14.5
4	#13990.00	37.7 AV	68.2	-30.5	1.63 H	285	23.2	14.5
5	20985.00	49.2 PK	74.0	-24.8	2.57 H	139	51.9	-2.7
6	20985.00	38.0 AV	54.0	-16.0	2.57 H	139	40.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	95.9 PK			1.62 V	92	89.0	6.9
2	*6995.00	84.7 AV			1.62 V	92	77.8	6.9
3	#13990.00	47.2 PK	88.2	-41.0	1.79 V	238	32.7	14.5
4	#13990.00	36.5 AV	68.2	-31.7	1.79 V	238	22.0	14.5
5	20985.00	50.5 PK	74.0	-23.5	2.57 V	170	53.2	-2.7
6	20985.00	38.9 AV	54.0	-15.1	2.57 V	170	41.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	87.6 PK			1.03 H	211	80.1	7.5
2	*7115.00	74.8 AV			1.03 H	211	67.3	7.5
3	#7125.00	54.4 PK	88.2	-33.8	1.03 H	211	46.9	7.5
4	#7125.00	41.7 AV	68.2	-26.5	1.03 H	211	34.2	7.5
5	7250.00	56.2 PK	74.0	-17.8	1.03 H	211	48.5	7.7
6	7250.00	44.8 AV	54.0	-9.2	1.03 H	211	37.1	7.7
7	#14230.00	48.1 PK	88.2	-40.1	1.66 H	286	33.5	14.6
8	#14230.00	37.3 AV	68.2	-30.9	1.66 H	286	22.7	14.6
9	21345.00	49.4 PK	74.0	-24.6	2.63 H	146	51.6	-2.2
10	21345.00	38.1 AV	54.0	-15.9	2.63 H	146	40.3	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	94.9 PK			3.13 V	89	87.4	7.5
2	*7115.00	82.8 AV			3.13 V	89	75.3	7.5
3	#7125.00	54.7 PK	88.2	-33.5	3.13 V	89	47.2	7.5
4	#7125.00	42.0 AV	68.2	-26.2	3.13 V	89	34.5	7.5
5	7250.00	55.9 PK	74.0	-18.1	3.13 V	89	48.2	7.7
6	7250.00	43.8 AV	54.0	-10.2	3.13 V	89	36.1	7.7
7	#14230.00	47.3 PK	88.2	-40.9	1.90 V	241	32.7	14.6
8	#14230.00	36.9 AV	68.2	-31.3	1.90 V	241	22.3	14.6
9	21345.00	49.6 PK	74.0	-24.4	2.55 V	183	51.8	-2.2
10	21345.00	38.3 AV	54.0	-15.7	2.55 V	183	40.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	84.1 PK			1.29 H	202	79.4	4.7
2	*6435.00	71.8 AV			1.29 H	202	67.1	4.7
3	#12870.00	48.0 PK	88.2	-40.2	1.66 H	288	35.2	12.8
4	#12870.00	37.0 AV	68.2	-31.2	1.66 H	288	24.2	12.8
5	19305.00	48.8 PK	74.0	-25.2	2.56 H	150	52.7	-3.9
6	19305.00	37.6 AV	54.0	-16.4	2.56 H	150	41.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	95.8 PK			1.85 V	93	91.1	4.7
2	*6435.00	83.7 AV			1.85 V	93	79.0	4.7
3	#12870.00	47.1 PK	88.2	-41.1	1.83 V	255	34.3	12.8
4	#12870.00	36.5 AV	68.2	-31.7	1.83 V	255	23.7	12.8
5	19305.00	50.0 PK	74.0	-24.0	2.52 V	190	53.9	-3.9
6	19305.00	38.8 AV	54.0	-15.2	2.52 V	190	42.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	83.7 PK			1.35 H	198	78.8	4.9
2	*6475.00	71.6 AV			1.35 H	198	66.7	4.9
3	#12950.00	47.7 PK	88.2	-40.5	1.65 H	289	35.2	12.5
4	#12950.00	37.3 AV	68.2	-30.9	1.65 H	289	24.8	12.5
5	19425.00	49.7 PK	74.0	-24.3	2.60 H	133	53.2	-3.5
6	19425.00	38.0 AV	54.0	-16.0	2.60 H	133	41.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	95.5 PK			1.95 V	94	90.6	4.9
2	*6475.00	83.2 AV			1.95 V	94	78.3	4.9
3	#12950.00	47.8 PK	88.2	-40.4	1.90 V	253	35.3	12.5
4	#12950.00	36.8 AV	68.2	-31.4	1.90 V	253	24.3	12.5
5	19425.00	50.4 PK	74.0	-23.6	2.57 V	171	53.9	-3.5
6	19425.00	38.9 AV	54.0	-15.1	2.57 V	171	42.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	83.9 PK			1.34 H	188	78.8	5.1
2	*6515.00	71.7 AV			1.34 H	188	66.6	5.1
3	#13030.00	47.6 PK	88.2	-40.6	1.65 H	276	35.3	12.3
4	#13030.00	36.9 AV	68.2	-31.3	1.65 H	276	24.6	12.3
5	19545.00	49.4 PK	74.0	-24.6	2.57 H	142	53.1	-3.7
6	19545.00	38.0 AV	54.0	-16.0	2.57 H	142	41.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	95.2 PK			1.26 V	283	90.1	5.1
2	*6515.00	82.6 AV			1.26 V	283	77.5	5.1
3	#13030.00	47.2 PK	88.2	-41.0	1.84 V	235	34.9	12.3
4	#13030.00	36.4 AV	68.2	-31.8	1.84 V	235	24.1	12.3
5	19545.00	50.6 PK	74.0	-23.4	2.62 V	172	54.3	-3.7
6	19545.00	38.8 AV	54.0	-15.2	2.62 V	172	42.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	84.5 PK			1.39 H	188	78.6	5.9
2	*6875.00	72.1 AV			1.39 H	188	66.2	5.9
3	#13750.00	48.2 PK	88.2	-40.0	1.61 H	274	34.3	13.9
4	#13750.00	37.8 AV	68.2	-30.4	1.61 H	274	23.9	13.9
5	20625.00	49.3 PK	74.0	-24.7	2.64 H	148	52.6	-3.3
6	20625.00	37.9 AV	54.0	-16.1	2.64 H	148	41.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	91.8 PK			1.04 V	3	85.9	5.9
2	*6875.00	80.3 AV			1.04 V	3	74.4	5.9
3	#13750.00	46.8 PK	88.2	-41.4	1.84 V	260	32.9	13.9
4	#13750.00	36.3 AV	68.2	-31.9	1.84 V	260	22.4	13.9
5	20625.00	49.9 PK	74.0	-24.1	2.57 V	190	53.2	-3.3
6	20625.00	38.5 AV	54.0	-15.5	2.57 V	190	41.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	84.4 PK			1.34 H	193	77.5	6.9
2	*6995.00	71.9 AV			1.34 H	193	65.0	6.9
3	#13990.00	47.8 PK	88.2	-40.4	1.63 H	278	33.3	14.5
4	#13990.00	36.9 AV	68.2	-31.3	1.63 H	278	22.4	14.5
5	20985.00	49.6 PK	74.0	-24.4	2.58 H	150	52.3	-2.7
6	20985.00	38.0 AV	54.0	-16.0	2.58 H	150	40.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	97.5 PK			2.95 V	88	90.6	6.9
2	*6995.00	84.1 AV			2.95 V	88	77.2	6.9
3	#13990.00	47.3 PK	88.2	-40.9	1.87 V	250	32.8	14.5
4	#13990.00	36.9 AV	68.2	-31.3	1.87 V	250	22.4	14.5
5	20985.00	49.8 PK	74.0	-24.2	2.60 V	180	52.5	-2.7
6	20985.00	38.5 AV	54.0	-15.5	2.60 V	180	41.2	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	86.2 PK			1.27 H	197	78.7	7.5
2	*7115.00	74.7 AV			1.27 H	197	67.2	7.5
3	#7125.00	54.9 PK	88.2	-33.3	1.27 H	197	47.4	7.5
4	#7125.00	45.3 AV	68.2	-22.9	1.27 H	197	37.8	7.5
5	7250.00	48.7 PK	74.0	-25.3	1.27 H	197	41.0	7.7
6	7250.00	40.9 AV	54.0	-13.1	1.27 H	197	33.2	7.7
7	#14230.00	47.8 PK	88.2	-40.4	1.70 H	286	33.2	14.6
8	#14230.00	37.3 AV	68.2	-30.9	1.70 H	286	22.7	14.6
9	21345.00	49.3 PK	74.0	-24.7	2.65 H	129	51.5	-2.2
10	21345.00	37.8 AV	54.0	-16.2	2.65 H	129	40.0	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.1 PK			3.03 V	90	89.6	7.5
2	*7115.00	86.5 AV			3.03 V	90	79.0	7.5
3	#7125.00	62.0 PK	88.2	-26.2	3.03 V	90	54.5	7.5
4	#7125.00	51.8 AV	68.2	-16.4	3.03 V	90	44.3	7.5
5	7250.00	56.2 PK	74.0	-17.8	3.03 V	90	48.5	7.7
6	7250.00	43.8 AV	54.0	-10.2	3.03 V	90	36.1	7.7
7	#14230.00	47.3 PK	88.2	-40.9	1.80 V	250	32.7	14.6
8	#14230.00	36.5 AV	68.2	-31.7	1.80 V	250	21.9	14.6
9	21345.00	49.6 PK	74.0	-24.4	2.54 V	175	51.8	-2.2
10	21345.00	38.3 AV	54.0	-15.7	2.54 V	175	40.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	84.1 PK			1.31 H	138	79.4	4.7
2	*6435.00	71.6 AV			1.31 H	138	66.9	4.7
3	#12870.00	47.8 PK	88.2	-40.4	1.69 H	290	35.0	12.8
4	#12870.00	37.4 AV	68.2	-30.8	1.69 H	290	24.6	12.8
5	19305.00	49.0 PK	74.0	-25.0	2.57 H	127	52.9	-3.9
6	19305.00	37.6 AV	54.0	-16.4	2.57 H	127	41.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.4 PK			1.68 V	98	91.7	4.7
2	*6435.00	84.7 AV			1.68 V	98	80.0	4.7
3	#12870.00	47.0 PK	88.2	-41.2	1.86 V	236	34.2	12.8
4	#12870.00	36.2 AV	68.2	-32.0	1.86 V	236	23.4	12.8
5	19305.00	49.6 PK	74.0	-24.4	2.53 V	165	53.5	-3.9
6	19305.00	38.2 AV	54.0	-15.8	2.53 V	165	42.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	83.9 PK			1.33 H	152	78.8	5.1
2	*6515.00	71.6 AV			1.33 H	152	66.5	5.1
3	#13030.00	48.6 PK	88.2	-39.6	1.67 H	276	36.3	12.3
4	#13030.00	37.8 AV	68.2	-30.4	1.67 H	276	25.5	12.3
5	19545.00	49.4 PK	74.0	-24.6	2.55 H	150	53.1	-3.7
6	19545.00	37.9 AV	54.0	-16.1	2.55 H	150	41.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.0 PK			1.00 V	97	90.9	5.1
2	*6515.00	84.1 AV			1.00 V	97	79.0	5.1
3	#13030.00	46.6 PK	88.2	-41.6	1.89 V	252	34.3	12.3
4	#13030.00	36.1 AV	68.2	-32.1	1.89 V	252	23.8	12.3
5	19545.00	49.7 PK	74.0	-24.3	2.64 V	186	53.4	-3.7
6	19545.00	38.1 AV	54.0	-15.9	2.64 V	186	41.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	84.2 PK			1.37 H	137	78.3	5.9
2	*6875.00	71.9 AV			1.37 H	137	66.0	5.9
3	#13750.00	48.2 PK	88.2	-40.0	1.69 H	265	34.3	13.9
4	#13750.00	37.4 AV	68.2	-30.8	1.69 H	265	23.5	13.9
5	20625.00	49.4 PK	74.0	-24.6	2.60 H	136	52.7	-3.3
6	20625.00	37.7 AV	54.0	-16.3	2.60 H	136	41.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.4 PK			1.50 V	95	90.5	5.9
2	*6875.00	85.9 AV			1.50 V	95	80.0	5.9
3	#13750.00	47.5 PK	88.2	-40.7	1.82 V	251	33.6	13.9
4	#13750.00	36.8 AV	68.2	-31.4	1.82 V	251	22.9	13.9
5	20625.00	49.4 PK	74.0	-24.6	2.58 V	189	52.7	-3.3
6	20625.00	38.1 AV	54.0	-15.9	2.58 V	189	41.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	86.7 PK			1.04 H	211	79.2	7.5
2	*7115.00	75.9 AV			1.04 H	211	68.4	7.5
3	#7125.00	54.3 PK	88.2	-33.9	1.04 H	211	46.8	7.5
4	#7125.00	42.0 AV	68.2	-26.2	1.04 H	211	34.5	7.5
5	7250.00	55.7 PK	74.0	-18.3	1.04 H	211	48.0	7.7
6	7250.00	45.8 AV	54.0	-8.2	1.04 H	211	38.1	7.7
7	#14230.00	47.7 PK	88.2	-40.5	1.67 H	273	33.1	14.6
8	#14230.00	37.0 AV	68.2	-31.2	1.67 H	273	22.4	14.6
9	21345.00	49.7 PK	74.0	-24.3	2.66 H	156	51.9	-2.2
10	21345.00	38.2 AV	54.0	-15.8	2.66 H	156	40.4	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.8 PK			1.69 V	92	88.3	7.5
2	*7115.00	84.7 AV			1.69 V	92	77.2	7.5
3	#7125.00	53.8 PK	88.2	-34.4	1.69 V	92	46.3	7.5
4	#7125.00	41.9 AV	68.2	-26.3	1.69 V	92	34.4	7.5
5	7250.00	54.1 PK	74.0	-19.9	1.69 V	92	46.4	7.7
6	7250.00	43.5 AV	54.0	-10.5	1.69 V	92	35.8	7.7
7	#14230.00	46.8 PK	88.2	-41.4	1.87 V	246	32.2	14.6
8	#14230.00	36.3 AV	68.2	-31.9	1.87 V	246	21.7	14.6
9	21345.00	49.5 PK	74.0	-24.5	2.61 V	180	51.7	-2.2
10	21345.00	38.0 AV	54.0	-16.0	2.61 V	180	40.2	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	83.3 PK			1.21 H	202	78.6	4.7
2	*6435.00	71.3 AV			1.21 H	202	66.6	4.7
3	#12870.00	48.2 PK	88.2	-40.0	1.68 H	273	35.4	12.8
4	#12870.00	37.8 AV	68.2	-30.4	1.68 H	273	25.0	12.8
5	19305.00	49.1 PK	74.0	-24.9	2.64 H	130	53.0	-3.9
6	19305.00	37.5 AV	54.0	-16.5	2.64 H	130	41.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.6 PK			1.64 V	93	91.9	4.7
2	*6435.00	84.8 AV			1.64 V	93	80.1	4.7
3	#12870.00	47.6 PK	88.2	-40.6	1.88 V	235	34.8	12.8
4	#12870.00	37.0 AV	68.2	-31.2	1.88 V	235	24.2	12.8
5	19305.00	49.6 PK	74.0	-24.4	2.61 V	168	53.5	-3.9
6	19305.00	38.1 AV	54.0	-15.9	2.61 V	168	42.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	83.6 PK			1.21 H	217	78.5	5.1
2	*6515.00	71.5 AV			1.21 H	217	66.4	5.1
3	#13030.00	48.3 PK	88.2	-39.9	1.72 H	274	36.0	12.3
4	#13030.00	37.6 AV	68.2	-30.6	1.72 H	274	25.3	12.3
5	19545.00	49.8 PK	74.0	-24.2	2.55 H	156	53.5	-3.7
6	19545.00	38.1 AV	54.0	-15.9	2.55 H	156	41.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	97.7 PK			1.82 V	95	92.6	5.1
2	*6515.00	84.1 AV			1.82 V	95	79.0	5.1
3	#13030.00	46.9 PK	88.2	-41.3	1.87 V	262	34.6	12.3
4	#13030.00	36.2 AV	68.2	-32.0	1.87 V	262	23.9	12.3
5	19545.00	49.6 PK	74.0	-24.4	2.53 V	193	53.3	-3.7
6	19545.00	38.3 AV	54.0	-15.7	2.53 V	193	42.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	83.2 PK			1.20 H	227	77.3	5.9
2	*6875.00	71.2 AV			1.20 H	227	65.3	5.9
3	#13750.00	48.3 PK	88.2	-39.9	1.64 H	285	34.4	13.9
4	#13750.00	37.7 AV	68.2	-30.5	1.64 H	285	23.8	13.9
5	20625.00	48.9 PK	74.0	-25.1	2.65 H	135	52.2	-3.3
6	20625.00	37.6 AV	54.0	-16.4	2.65 H	135	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.2 PK			1.51 V	93	90.3	5.9
2	*6875.00	85.7 AV			1.51 V	93	79.8	5.9
3	#13750.00	47.6 PK	88.2	-40.6	1.85 V	256	33.7	13.9
4	#13750.00	36.7 AV	68.2	-31.5	1.85 V	256	22.8	13.9
5	20625.00	49.6 PK	74.0	-24.4	2.56 V	178	52.9	-3.3
6	20625.00	38.1 AV	54.0	-15.9	2.56 V	178	41.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	61.6 PK			1.32 H	196	54.1	7.5
2	*7115.00	51.3 AV			1.32 H	196	43.8	7.5
3	#7125.00	54.1 PK	88.2	-34.1	1.32 H	196	46.6	7.5
4	#7125.00	45.1 AV	68.2	-23.1	1.32 H	196	37.6	7.5
5	7250.00	52.9 PK	74.0	-21.1	1.32 H	196	45.2	7.7
6	7250.00	42.0 AV	54.0	-12.0	1.32 H	196	34.3	7.7
7	#14230.00	47.7 PK	88.2	-40.5	1.63 H	264	33.1	14.6
8	#14230.00	37.0 AV	68.2	-31.2	1.63 H	264	22.4	14.6
9	21345.00	49.6 PK	74.0	-24.4	2.64 H	150	51.8	-2.2
10	21345.00	38.1 AV	54.0	-15.9	2.64 H	150	40.3	-2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	85.7 PK			1.52 V	95	78.2	7.5
2	*7115.00	74.6 AV			1.52 V	95	67.1	7.5
3	#7125.00	61.6 PK	88.2	-26.6	1.52 V	95	54.1	7.5
4	#7125.00	51.3 AV	68.2	-16.9	1.52 V	95	43.8	7.5
5	7250.00	51.7 PK	74.0	-22.3	1.52 V	95	44.0	7.7
6	7250.00	42.6 AV	54.0	-11.4	1.52 V	95	34.9	7.7
7	#14230.00	47.6 PK	88.2	-40.6	1.90 V	255	33.0	14.6
8	#14230.00	36.7 AV	68.2	-31.5	1.90 V	255	22.1	14.6
9	21345.00	49.9 PK	74.0	-24.1	2.54 V	193	52.1	-2.2
10	21345.00	38.4 AV	54.0	-15.6	2.54 V	193	40.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	84.1 PK			1.01 H	136	79.3	4.8
2	*6465.00	71.8 AV			1.01 H	136	67.0	4.8
3	#12930.00	47.9 PK	88.2	-40.3	1.63 H	270	35.2	12.7
4	#12930.00	37.3 AV	68.2	-30.9	1.63 H	270	24.6	12.7
5	19395.00	49.7 PK	74.0	-24.3	2.61 H	146	53.2	-3.5
6	19395.00	38.4 AV	54.0	-15.6	2.61 H	146	41.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	95.5 PK			1.35 V	94	90.7	4.8
2	*6465.00	83.9 AV			1.35 V	94	79.1	4.8
3	#12930.00	47.9 PK	88.2	-40.3	1.88 V	257	35.2	12.7
4	#12930.00	36.9 AV	68.2	-31.3	1.88 V	257	24.2	12.7
5	19395.00	49.6 PK	74.0	-24.4	2.60 V	181	53.1	-3.5
6	19395.00	38.1 AV	54.0	-15.9	2.60 V	181	41.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	84.1 PK			1.03 H	149	78.7	5.4
2	*6545.00	71.7 AV			1.03 H	149	66.3	5.4
3	#13090.00	48.0 PK	88.2	-40.2	1.69 H	277	35.5	12.5
4	#13090.00	37.3 AV	68.2	-30.9	1.69 H	277	24.8	12.5
5	19635.00	48.8 PK	74.0	-25.2	2.60 H	149	52.8	-4.0
6	19635.00	37.5 AV	54.0	-16.5	2.60 H	149	41.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	95.5 PK			1.58 V	94	90.1	5.4
2	*6545.00	83.5 AV			1.58 V	94	78.1	5.4
3	#13090.00	47.1 PK	88.2	-41.1	1.81 V	250	34.6	12.5
4	#13090.00	36.5 AV	68.2	-31.7	1.81 V	250	24.0	12.5
5	19635.00	49.7 PK	74.0	-24.3	2.61 V	179	53.7	-4.0
6	19635.00	38.4 AV	54.0	-15.6	2.61 V	179	42.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	83.6 PK			1.08 H	140	77.7	5.9
2	*6865.00	71.4 AV			1.08 H	140	65.5	5.9
3	#13730.00	48.1 PK	88.2	-40.1	1.72 H	272	34.1	14.0
4	#13730.00	37.7 AV	68.2	-30.5	1.72 H	272	23.7	14.0
5	20595.00	48.8 PK	74.0	-25.2	2.66 H	127	52.2	-3.4
6	20595.00	37.7 AV	54.0	-16.3	2.66 H	127	41.1	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	97.7 PK			1.67 V	94	91.8	5.9
2	*6865.00	84.4 AV			1.67 V	94	78.5	5.9
3	#13730.00	46.9 PK	88.2	-41.3	1.84 V	238	32.9	14.0
4	#13730.00	36.4 AV	68.2	-31.8	1.84 V	238	22.4	14.0
5	20595.00	49.7 PK	74.0	-24.3	2.63 V	176	53.1	-3.4
6	20595.00	38.4 AV	54.0	-15.6	2.63 V	176	41.8	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	85.8 PK			1.30 H	199	78.9	6.9
2	*7025.00	74.6 AV			1.30 H	199	67.7	6.9
3	#7125.00	54.5 PK	88.2	-33.7	1.30 H	199	47.0	7.5
4	#7125.00	41.9 AV	68.2	-26.3	1.30 H	199	34.4	7.5
5	7250.00	55.1 PK	74.0	-18.9	1.30 H	199	47.4	7.7
6	7250.00	43.0 AV	54.0	-11.0	1.30 H	199	35.3	7.7
7	#14050.00	48.1 PK	88.2	-40.1	1.66 H	286	33.5	14.6
8	#14050.00	37.1 AV	68.2	-31.1	1.66 H	286	22.5	14.6
9	21075.00	49.4 PK	74.0	-24.6	2.59 H	138	52.1	-2.7
10	21075.00	37.8 AV	54.0	-16.2	2.59 H	138	40.5	-2.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	97.1 PK			1.56 V	97	90.2	6.9
2	*7025.00	84.0 AV			1.56 V	97	77.1	6.9
3	#7125.00	54.8 PK	88.2	-33.4	1.56 V	97	47.3	7.5
4	#7125.00	42.0 AV	68.2	-26.2	1.56 V	97	34.5	7.5
5	7250.00	56.3 PK	74.0	-17.7	1.56 V	97	48.6	7.7
6	7250.00	43.7 AV	54.0	-10.3	1.56 V	97	36.0	7.7
7	#14050.00	47.7 PK	88.2	-40.5	1.87 V	252	33.1	14.6
8	#14050.00	36.9 AV	68.2	-31.3	1.87 V	252	22.3	14.6
9	21075.00	50.0 PK	74.0	-24.0	2.54 V	165	52.7	-2.7
10	21075.00	38.4 AV	54.0	-15.6	2.54 V	165	41.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	82.4 PK			1.23 H	146	77.4	5.0
2	*6505.00	71.0 AV			1.23 H	146	66.0	5.0
3	#13010.00	48.1 PK	88.2	-40.1	1.60 H	262	35.8	12.3
4	#13010.00	37.5 AV	68.2	-30.7	1.60 H	262	25.2	12.3
5	19515.00	49.0 PK	74.0	-25.0	2.67 H	138	52.5	-3.5
6	19515.00	37.8 AV	54.0	-16.2	2.67 H	138	41.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	93.7 PK			1.73 V	101	88.7	5.0
2	*6505.00	81.7 AV			1.73 V	101	76.7	5.0
3	#13010.00	46.7 PK	88.2	-41.5	1.87 V	246	34.4	12.3
4	#13010.00	36.2 AV	68.2	-32.0	1.87 V	246	23.9	12.3
5	19515.00	50.0 PK	74.0	-24.0	2.55 V	189	53.5	-3.5
6	19515.00	38.5 AV	54.0	-15.5	2.55 V	189	42.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	83.0 PK			1.17 H	161	77.2	5.8
2	*6825.00	71.3 AV			1.17 H	161	65.5	5.8
3	#13650.00	48.0 PK	88.2	-40.2	1.69 H	274	34.1	13.9
4	#13650.00	37.3 AV	68.2	-30.9	1.69 H	274	23.4	13.9
5	20475.00	50.1 PK	74.0	-23.9	2.60 H	140	53.0	-2.9
6	20475.00	38.5 AV	54.0	-15.5	2.60 H	140	41.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	93.2 PK			1.63 V	360	87.4	5.8
2	*6825.00	82.4 AV			1.63 V	360	76.6	5.8
3	#13650.00	47.4 PK	88.2	-40.8	1.87 V	240	33.5	13.9
4	#13650.00	36.8 AV	68.2	-31.4	1.87 V	240	22.9	13.9
5	20475.00	50.0 PK	74.0	-24.0	2.63 V	184	52.9	-2.9
6	20475.00	38.6 AV	54.0	-15.4	2.63 V	184	41.5	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	84.9 PK			1.18 H	212	78.0	6.9
2	*6985.00	71.7 AV			1.18 H	212	64.8	6.9
3	#7125.00	54.8 PK	88.2	-33.4	1.18 H	212	47.3	7.5
4	#7125.00	42.6 AV	68.2	-25.6	1.18 H	212	35.1	7.5
5	7250.00	55.7 PK	74.0	-18.3	1.18 H	212	48.0	7.7
6	7250.00	44.7 AV	54.0	-9.3	1.18 H	212	37.0	7.7
7	#13970.00	48.0 PK	88.2	-40.2	1.69 H	270	33.6	14.4
8	#13970.00	37.4 AV	68.2	-30.8	1.69 H	270	23.0	14.4
9	20955.00	49.2 PK	74.0	-24.8	2.64 H	145	51.8	-2.6
10	20955.00	37.8 AV	54.0	-16.2	2.64 H	145	40.4	-2.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	93.9 PK			1.71 V	90	87.0	6.9
2	*6985.00	81.7 AV			1.71 V	90	74.8	6.9
3	#7125.00	55.7 PK	88.2	-32.5	1.71 V	90	48.2	7.5
4	#7125.00	42.1 AV	68.2	-26.1	1.71 V	90	34.6	7.5
5	7250.00	56.4 PK	74.0	-17.6	1.71 V	90	48.7	7.7
6	7250.00	45.3 AV	54.0	-8.7	1.71 V	90	37.6	7.7
7	#13970.00	47.3 PK	88.2	-40.9	1.79 V	262	32.9	14.4
8	#13970.00	36.3 AV	68.2	-31.9	1.79 V	262	21.9	14.4
9	20955.00	50.2 PK	74.0	-23.8	2.56 V	184	52.8	-2.6
10	20955.00	38.7 AV	54.0	-15.3	2.56 V	184	41.3	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	83.1 PK			1.26 H	163	78.1	5.0
2	*6505.00	70.2 AV			1.26 H	163	65.2	5.0
3	#13010.00	48.3 PK	88.2	-39.9	1.61 H	263	36.0	12.3
4	#13010.00	37.6 AV	68.2	-30.6	1.61 H	263	25.3	12.3
5	19515.00	48.8 PK	74.0	-25.2	2.67 H	148	52.3	-3.5
6	19515.00	37.7 AV	54.0	-16.3	2.67 H	148	41.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	94.1 PK			1.84 V	96	89.1	5.0
2	*6505.00	82.0 AV			1.84 V	96	77.0	5.0
3	#13010.00	46.9 PK	88.2	-41.3	1.87 V	263	34.6	12.3
4	#13010.00	36.3 AV	68.2	-31.9	1.87 V	263	24.0	12.3
5	19515.00	50.6 PK	74.0	-23.4	2.53 V	167	54.1	-3.5
6	19515.00	38.9 AV	54.0	-15.1	2.53 V	167	42.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	82.8 PK			1.26 H	155	77.0	5.8
2	*6825.00	70.1 AV			1.26 H	155	64.3	5.8
3	#13650.00	48.1 PK	88.2	-40.1	1.64 H	289	34.2	13.9
4	#13650.00	37.4 AV	68.2	-30.8	1.64 H	289	23.5	13.9
5	20475.00	49.1 PK	74.0	-24.9	2.55 H	148	52.0	-2.9
6	20475.00	37.8 AV	54.0	-16.2	2.55 H	148	40.7	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	94.2 PK			1.44 V	90	88.4	5.8
2	*6825.00	82.3 AV			1.44 V	90	76.5	5.8
3	#13650.00	46.9 PK	88.2	-41.3	1.84 V	247	33.0	13.9
4	#13650.00	36.2 AV	68.2	-32.0	1.84 V	247	22.3	13.9
5	20475.00	49.6 PK	74.0	-24.4	2.53 V	167	52.5	-2.9
6	20475.00	38.0 AV	54.0	-16.0	2.53 V	167	40.9	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	82.9 PK			2.34 H	196	76.0	6.9
2	*6985.00	71.4 AV			2.34 H	196	64.5	6.9
3	#7125.00	53.5 PK	88.2	-34.7	2.34 H	196	46.0	7.5
4	#7125.00	42.3 AV	68.2	-25.9	2.34 H	196	34.8	7.5
5	7250.00	51.9 PK	74.0	-22.1	2.34 H	196	44.2	7.7
6	7250.00	45.2 AV	54.0	-8.8	2.34 H	196	37.5	7.7
7	#13970.00	48.2 PK	88.2	-40.0	1.66 H	291	33.8	14.4
8	#13970.00	37.6 AV	68.2	-30.6	1.66 H	291	23.2	14.4
9	20955.00	49.4 PK	74.0	-24.6	2.60 H	134	52.0	-2.6
10	20955.00	38.2 AV	54.0	-15.8	2.60 H	134	40.8	-2.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	95.5 PK			1.67 V	92	88.6	6.9
2	*6985.00	82.6 AV			1.67 V	92	75.7	6.9
3	#7125.00	55.2 PK	88.2	-33.0	1.67 V	92	47.7	7.5
4	#7125.00	42.2 AV	68.2	-26.0	1.67 V	92	34.7	7.5
5	7250.00	54.7 PK	74.0	-19.3	1.67 V	92	47.0	7.7
6	7250.00	43.8 AV	54.0	-10.2	1.67 V	92	36.1	7.7
7	#13970.00	47.5 PK	88.2	-40.7	1.87 V	238	33.1	14.4
8	#13970.00	36.6 AV	68.2	-31.6	1.87 V	238	22.2	14.4
9	20955.00	49.5 PK	74.0	-24.5	2.58 V	187	52.1	-2.6
10	20955.00	38.0 AV	54.0	-16.0	2.58 V	187	40.6	-2.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Mode C_1TX

For Integration method:

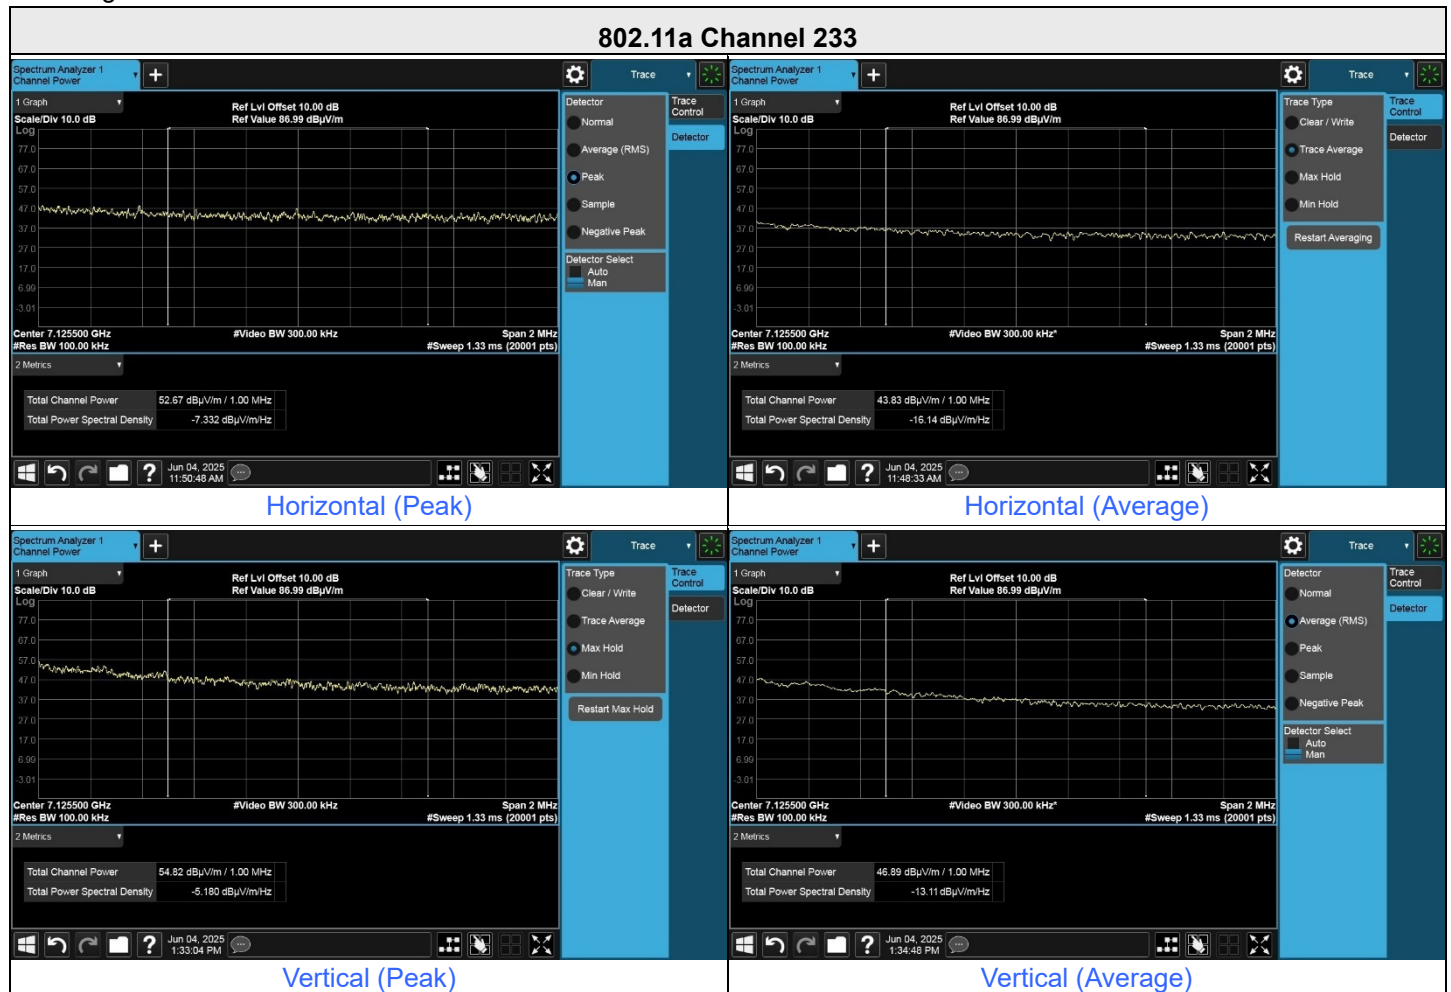


For Integration method:

802.11be (EHT20) Channel 233

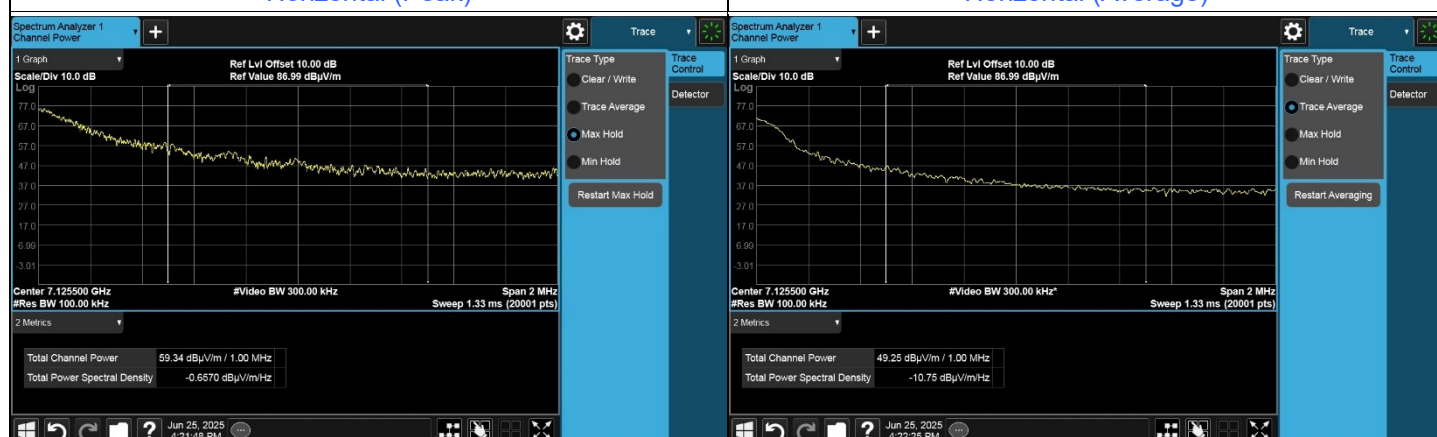


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 227

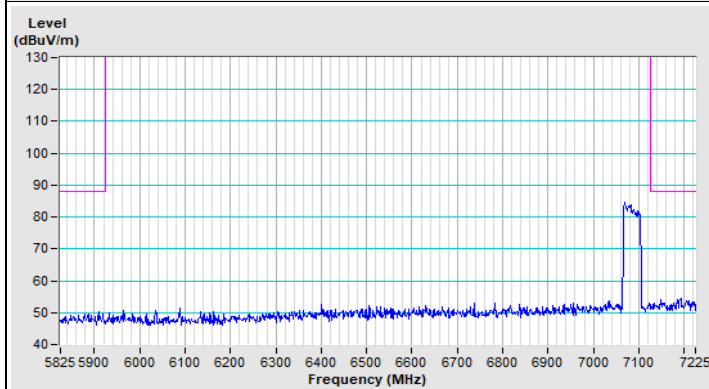


Horizontal (Peak)

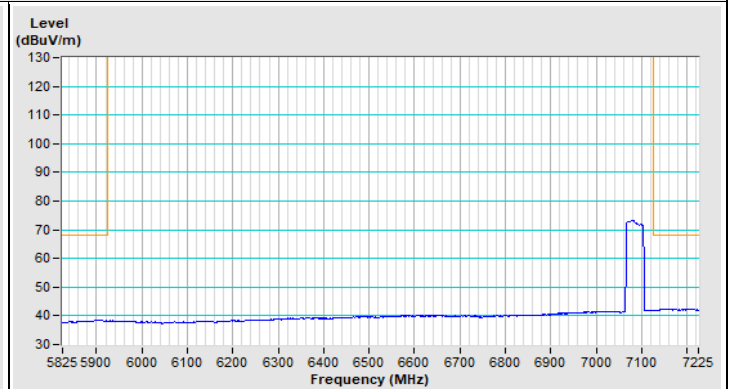

Horizontal (Average)

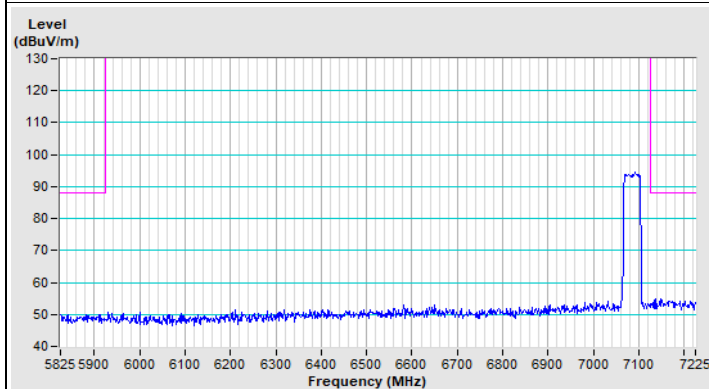


Vertical (Peak)

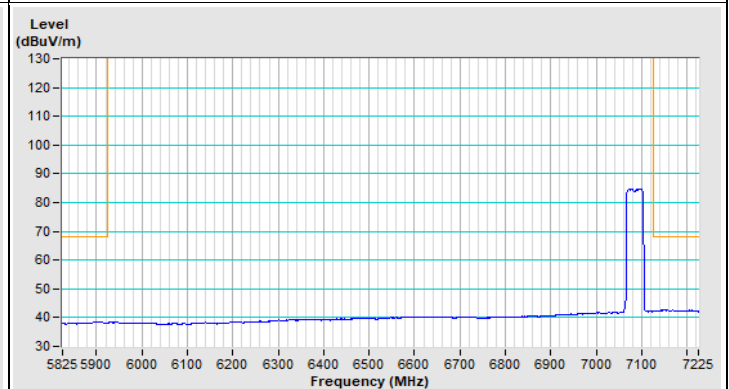


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 215

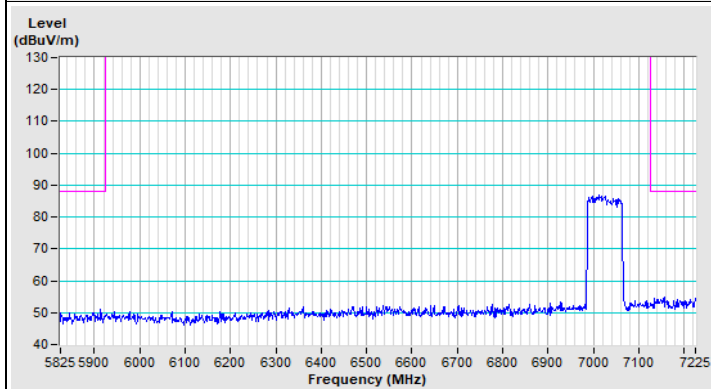


Horizontal (Peak)

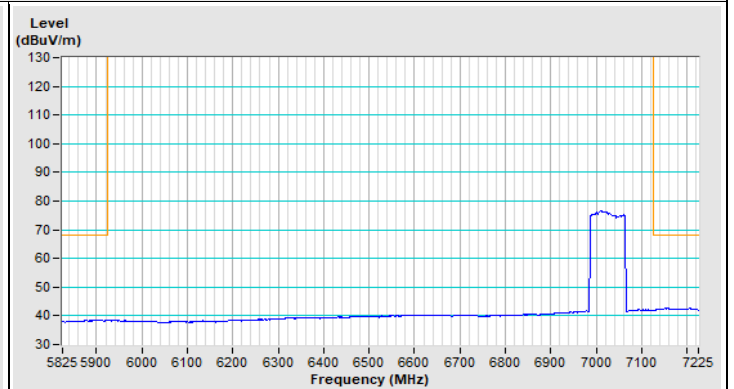

Horizontal (Average)

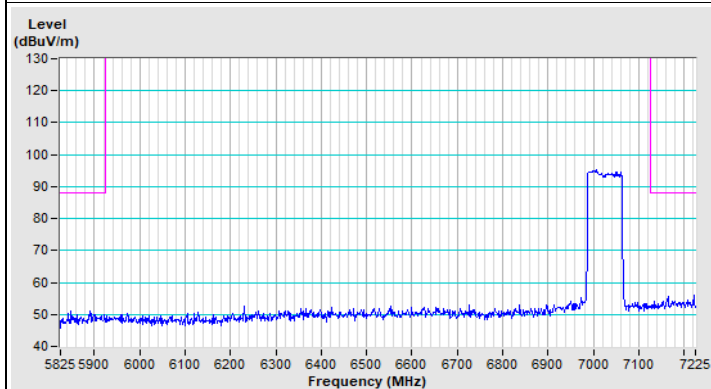


Vertical (Peak)

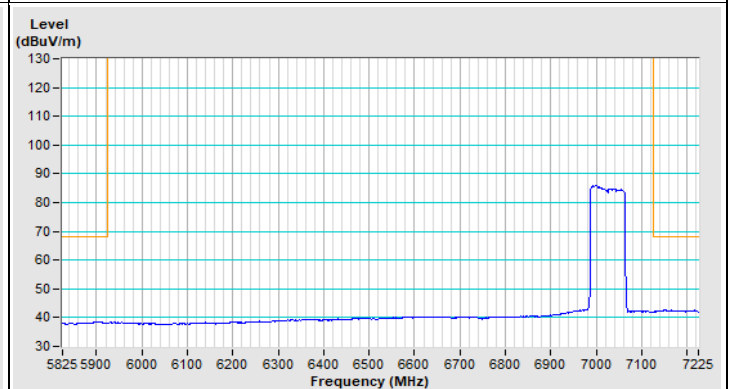


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 207

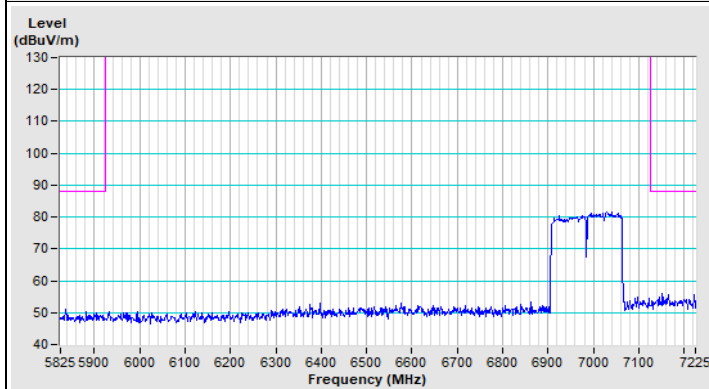


Horizontal (Peak)

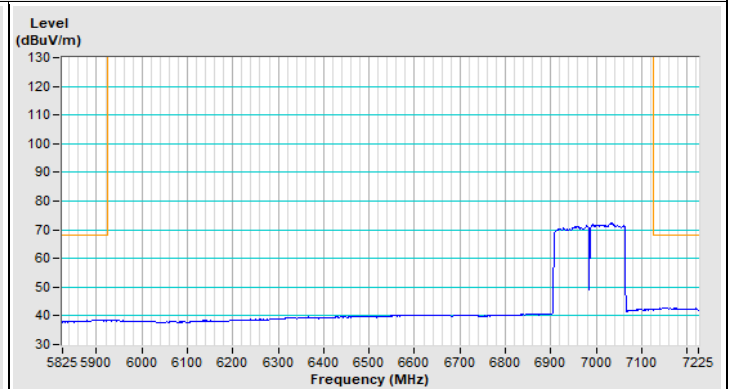

Horizontal (Average)

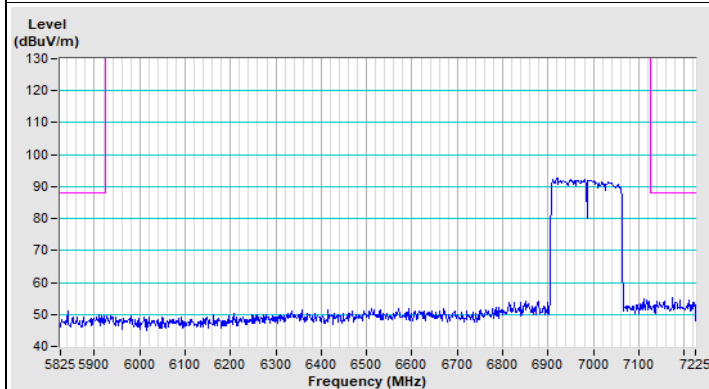


Vertical (Peak)

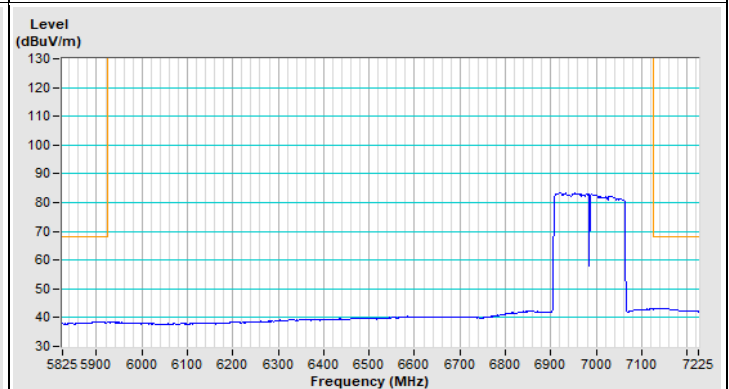

Vertical (Average)


For Integration method:

802.11be (EHT20) 26-tone RU Channel 233

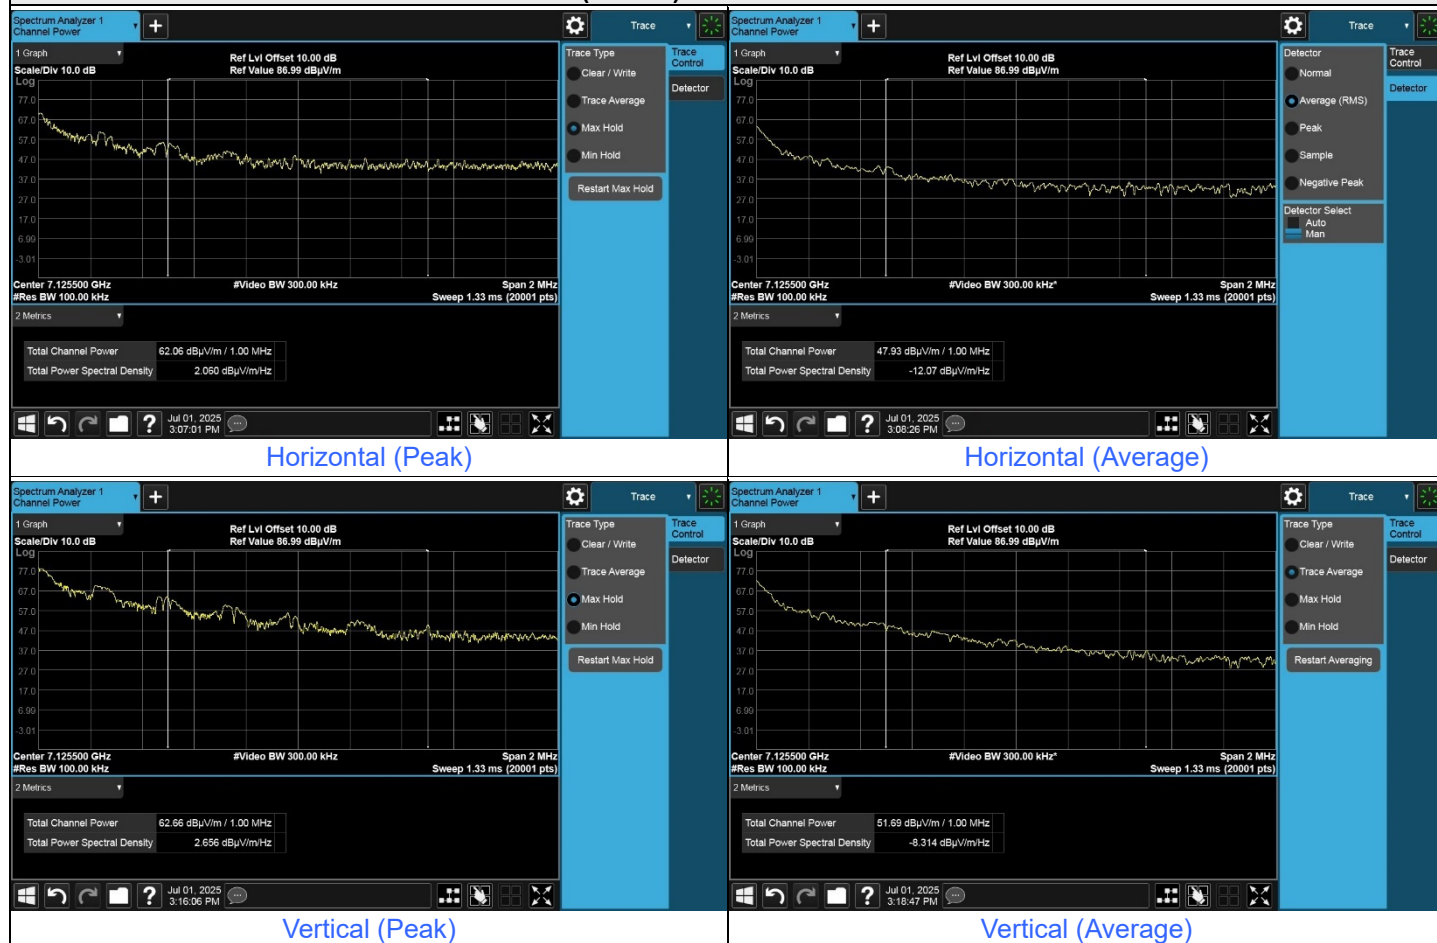



For Integration method:

802.11be (EHT20) 52-tone RU Channel 233

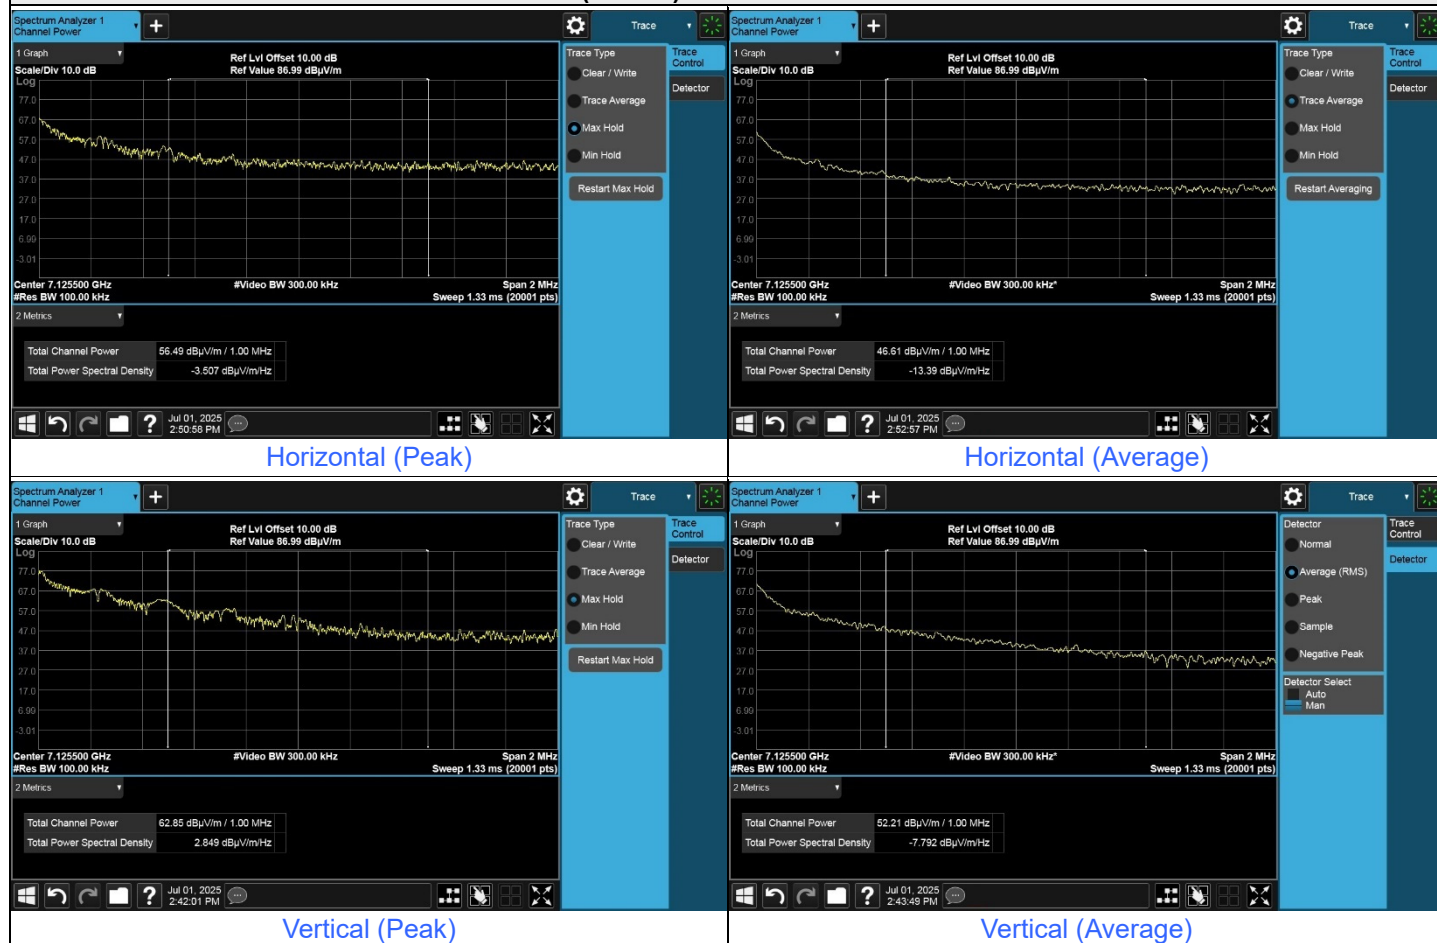


For Integration method:


802.11be (EHT20) 106-tone RU Channel 233

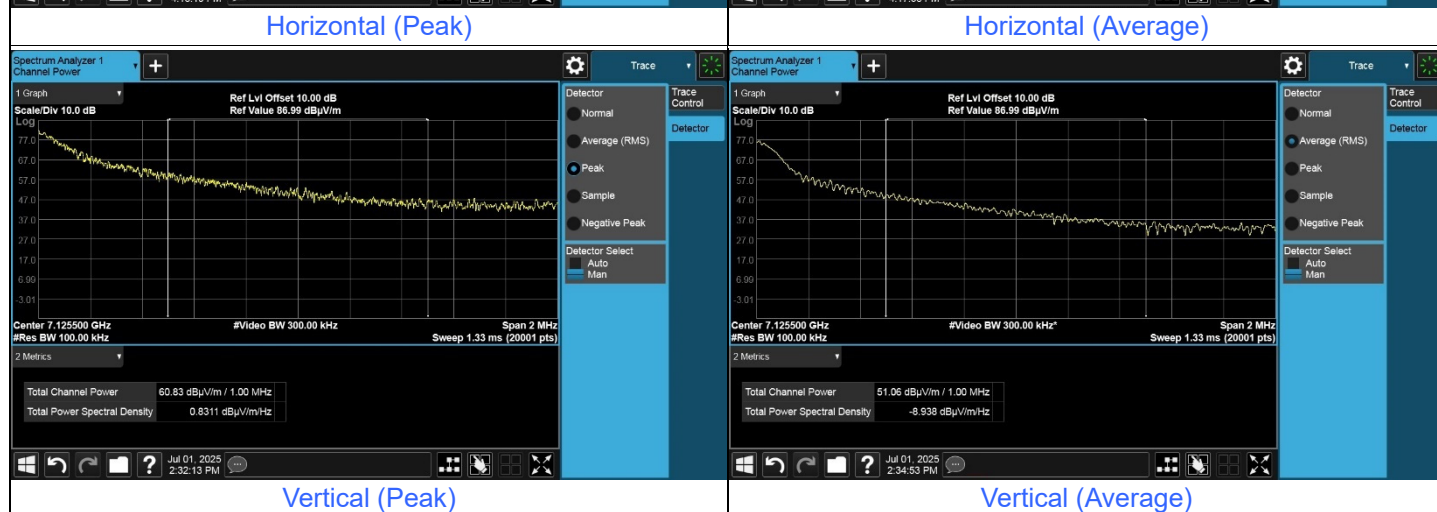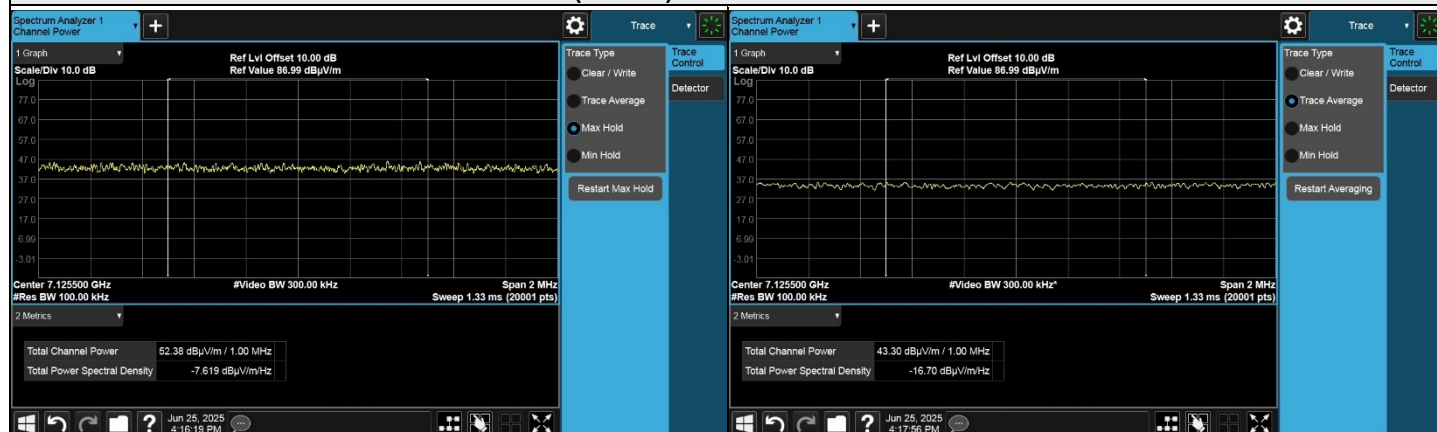


802.11be (EHT20) 52+26-tone MRU Channel 233

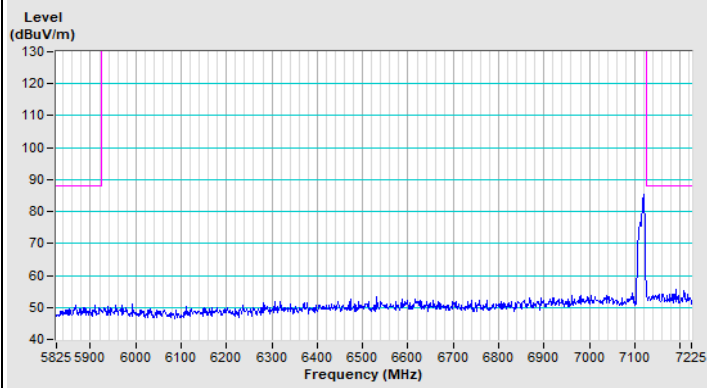


Horizontal (Peak)

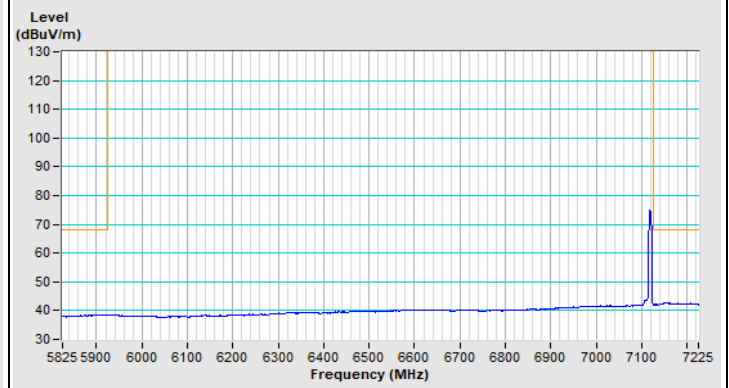

Horizontal (Average)

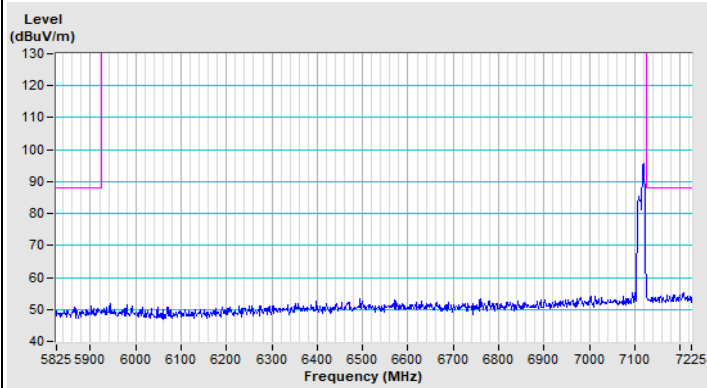


Vertical (Peak)

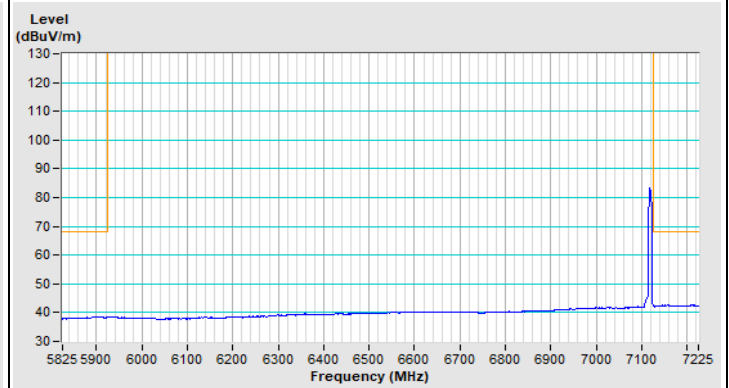


Vertical (Average)

For Integration method:

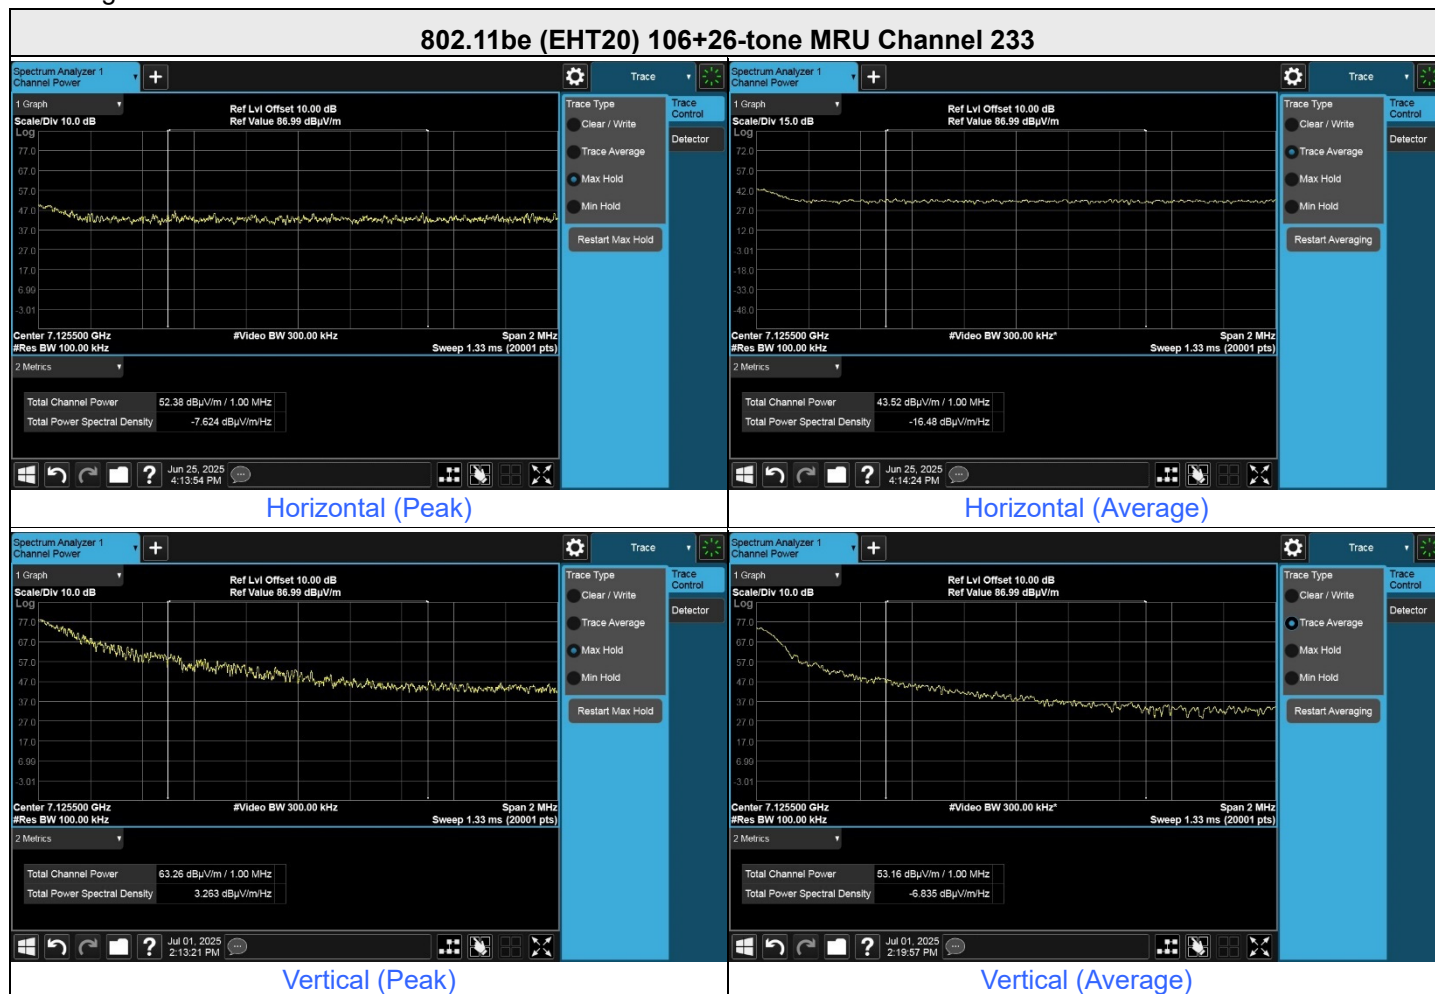


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 215

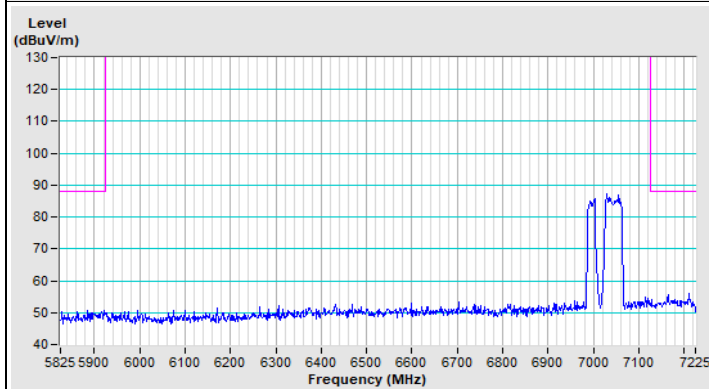


Horizontal (Peak)

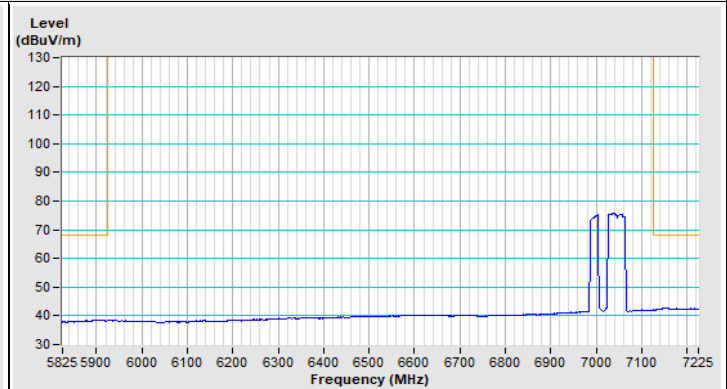

Horizontal (Average)

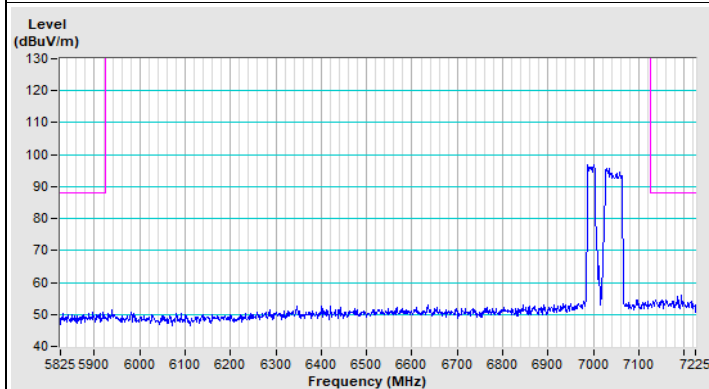


Vertical (Peak)

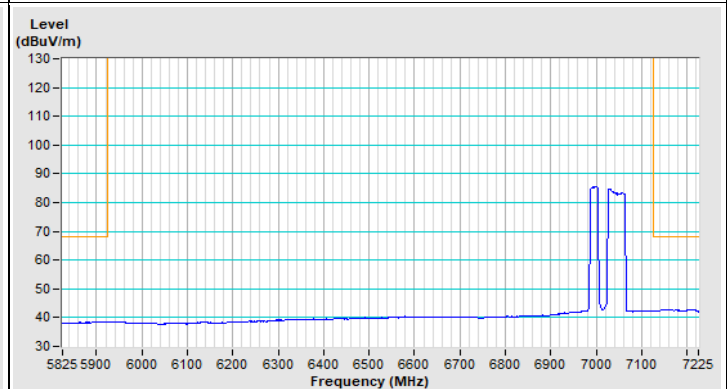


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 207

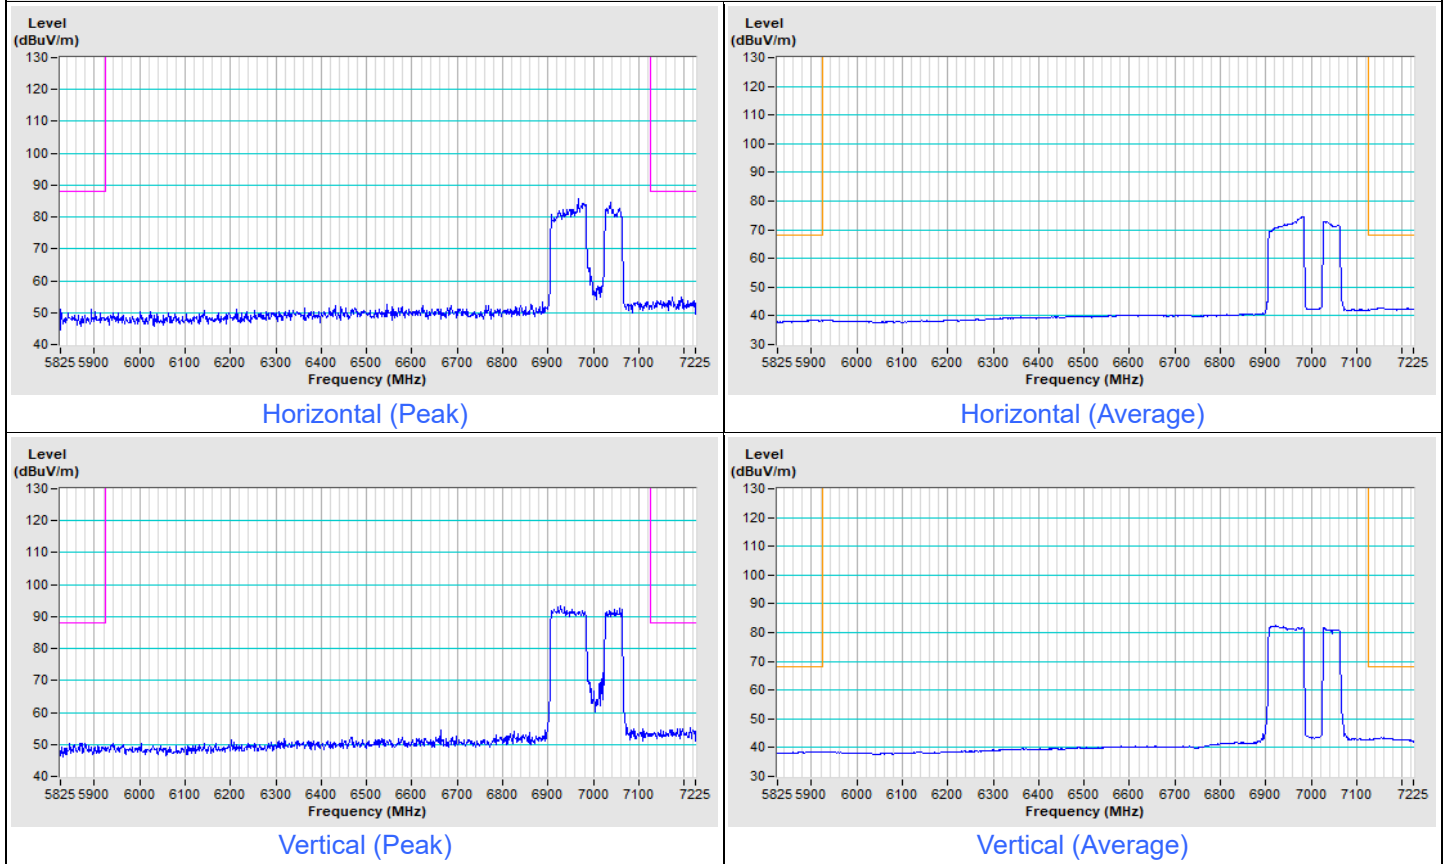


802.11be (EHT160) 996+484+242-tone MRU Channel 207

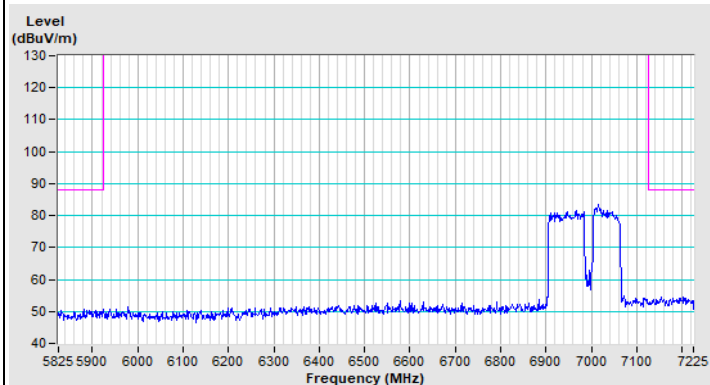


Horizontal (Peak)

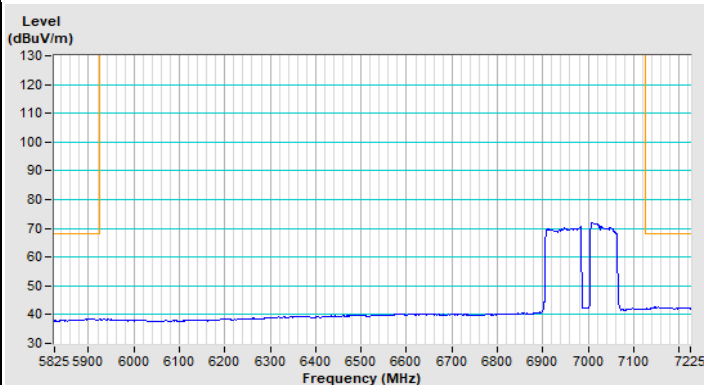

Horizontal (Average)

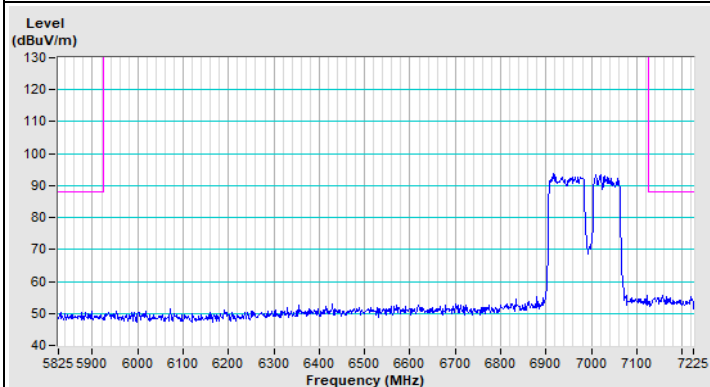

Vertical (Peak)

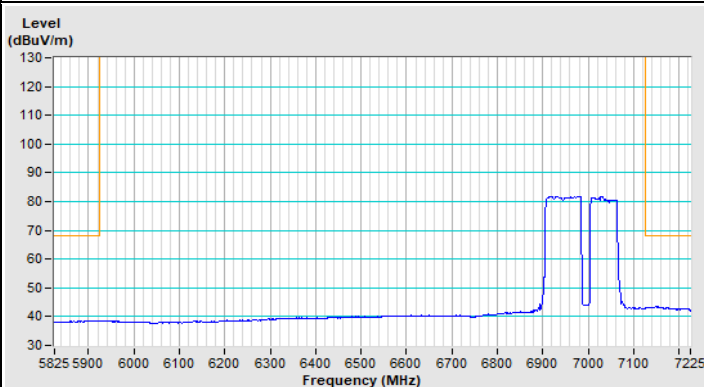


Vertical (Average)

Plot of Band Edge

Mode C_2TX

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11a Channel 233

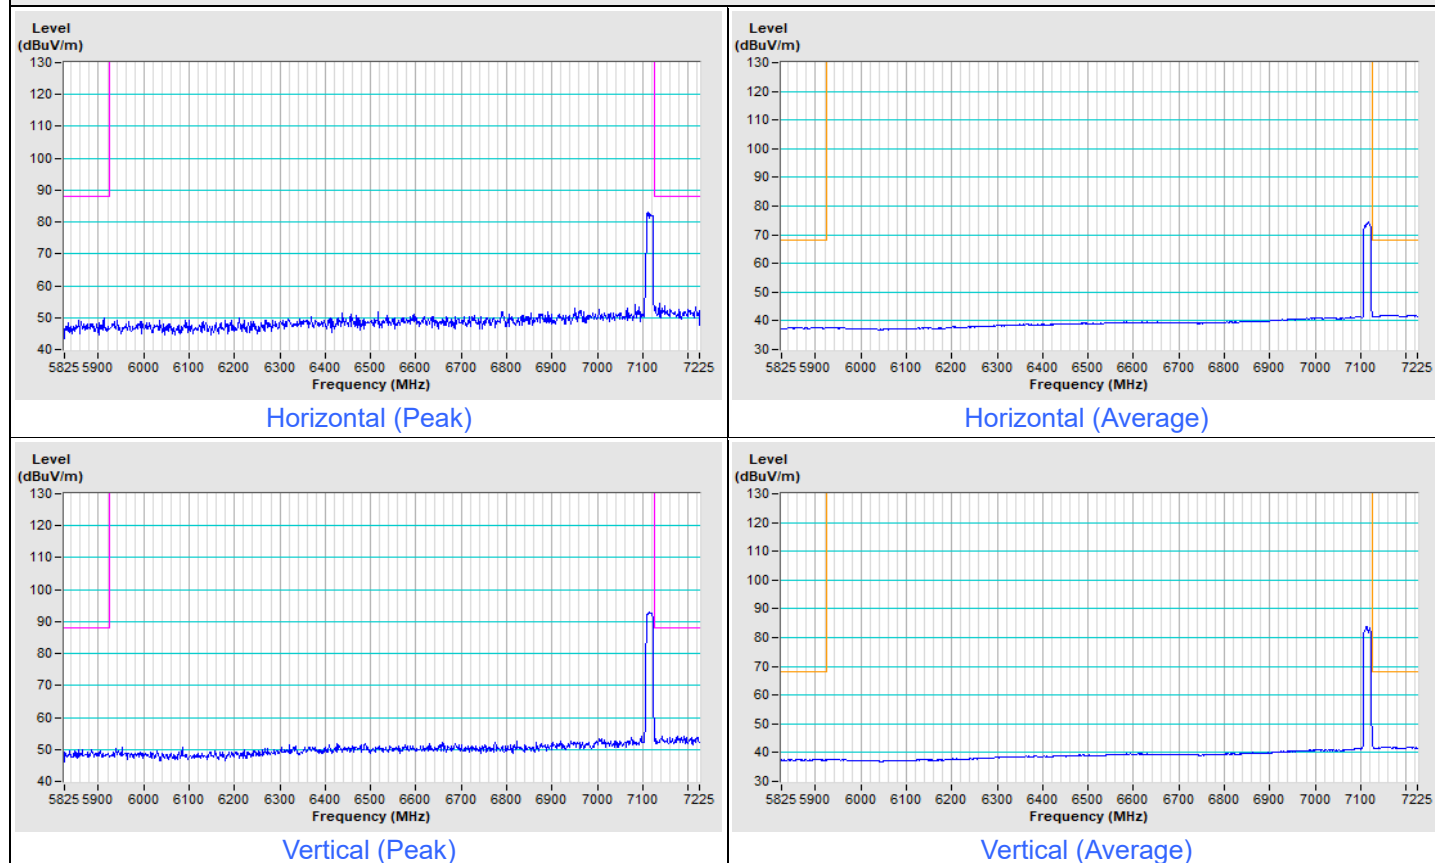


For Integration method:

802.11be (EHT20) Channel 233



Horizontal (Peak)

Horizontal (Average)

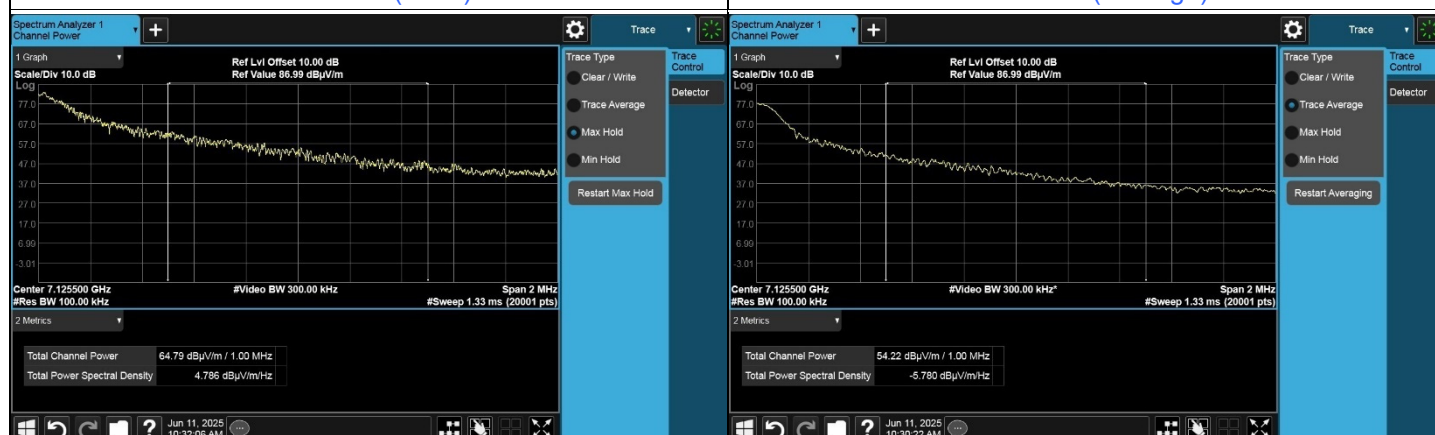


Vertical (Peak)

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT40) Channel 227

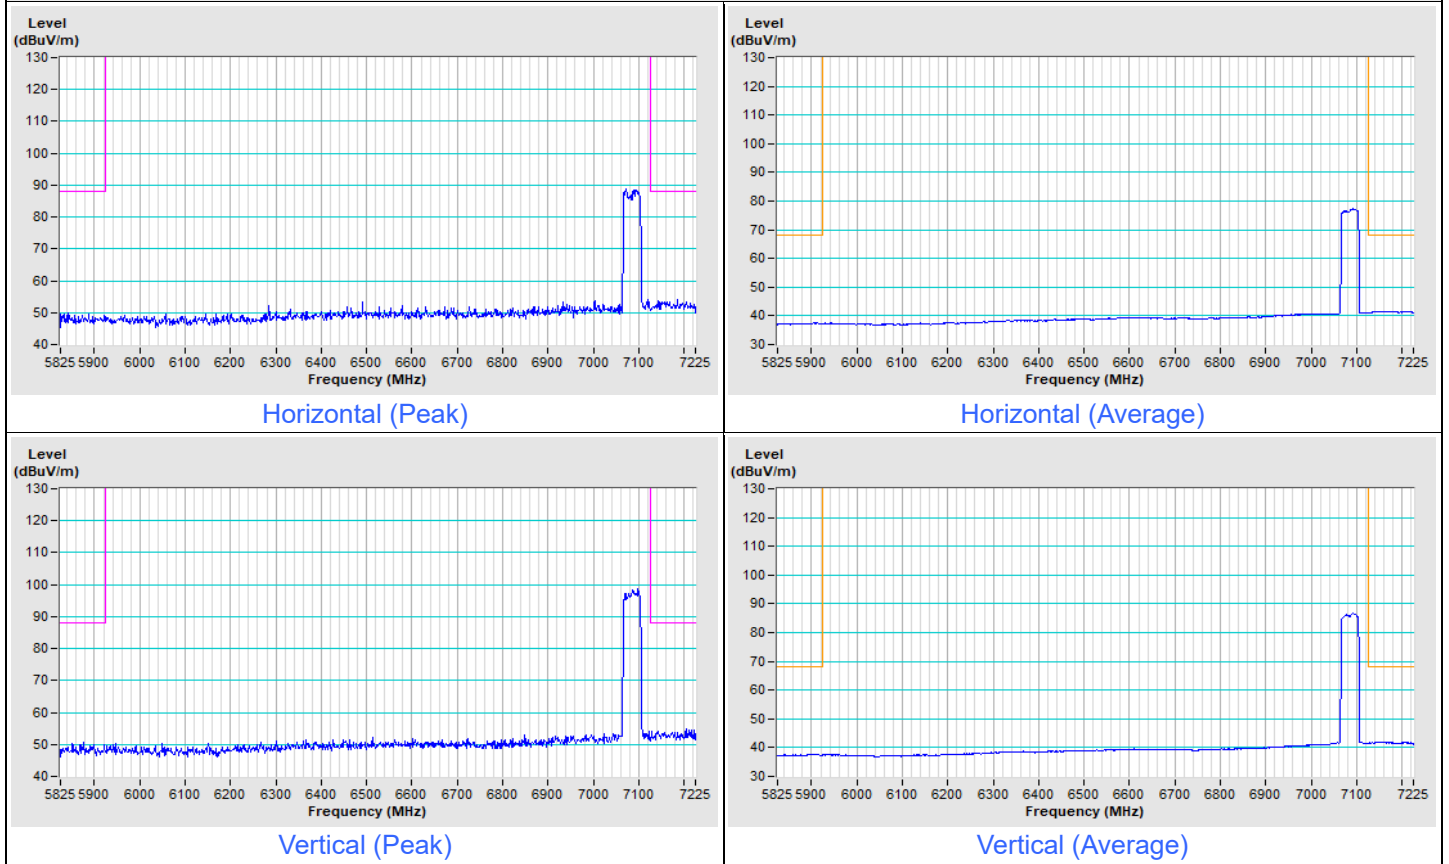


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 215

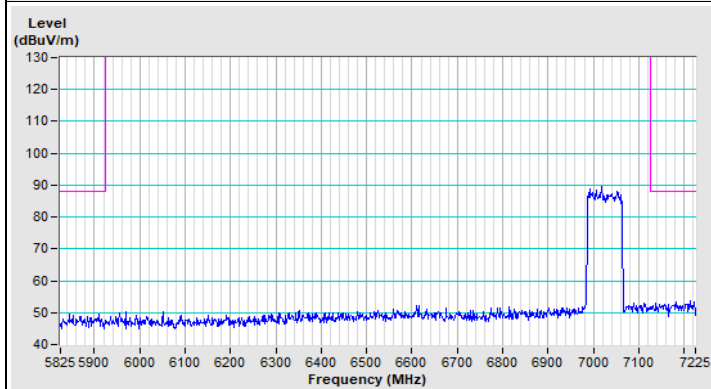


Horizontal (Peak)

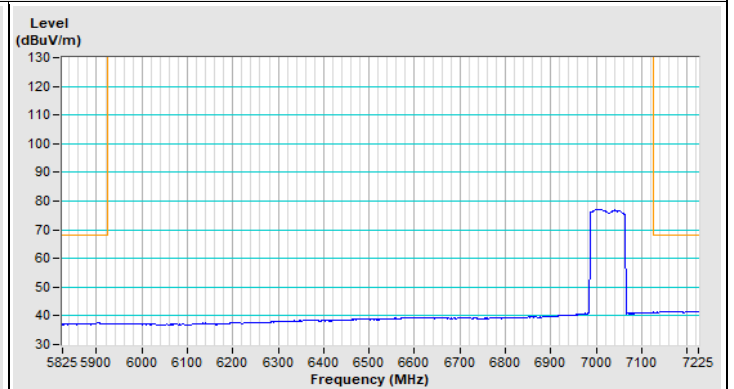

Horizontal (Average)

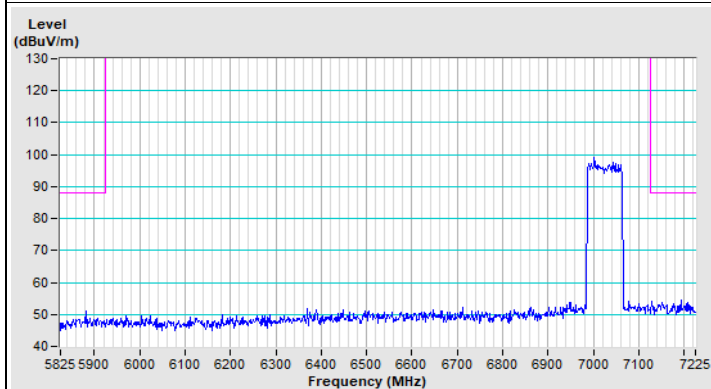


Vertical (Peak)

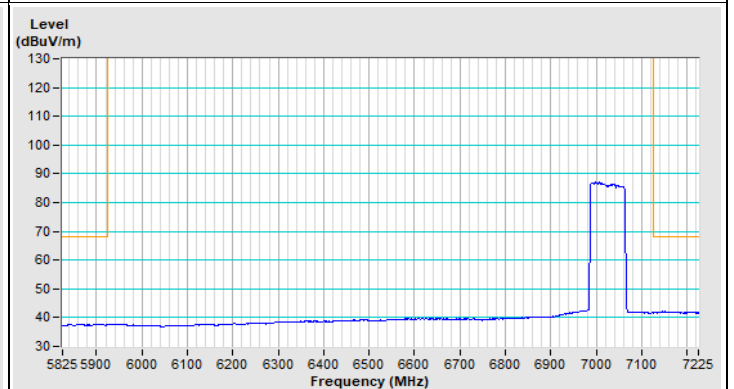

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 207

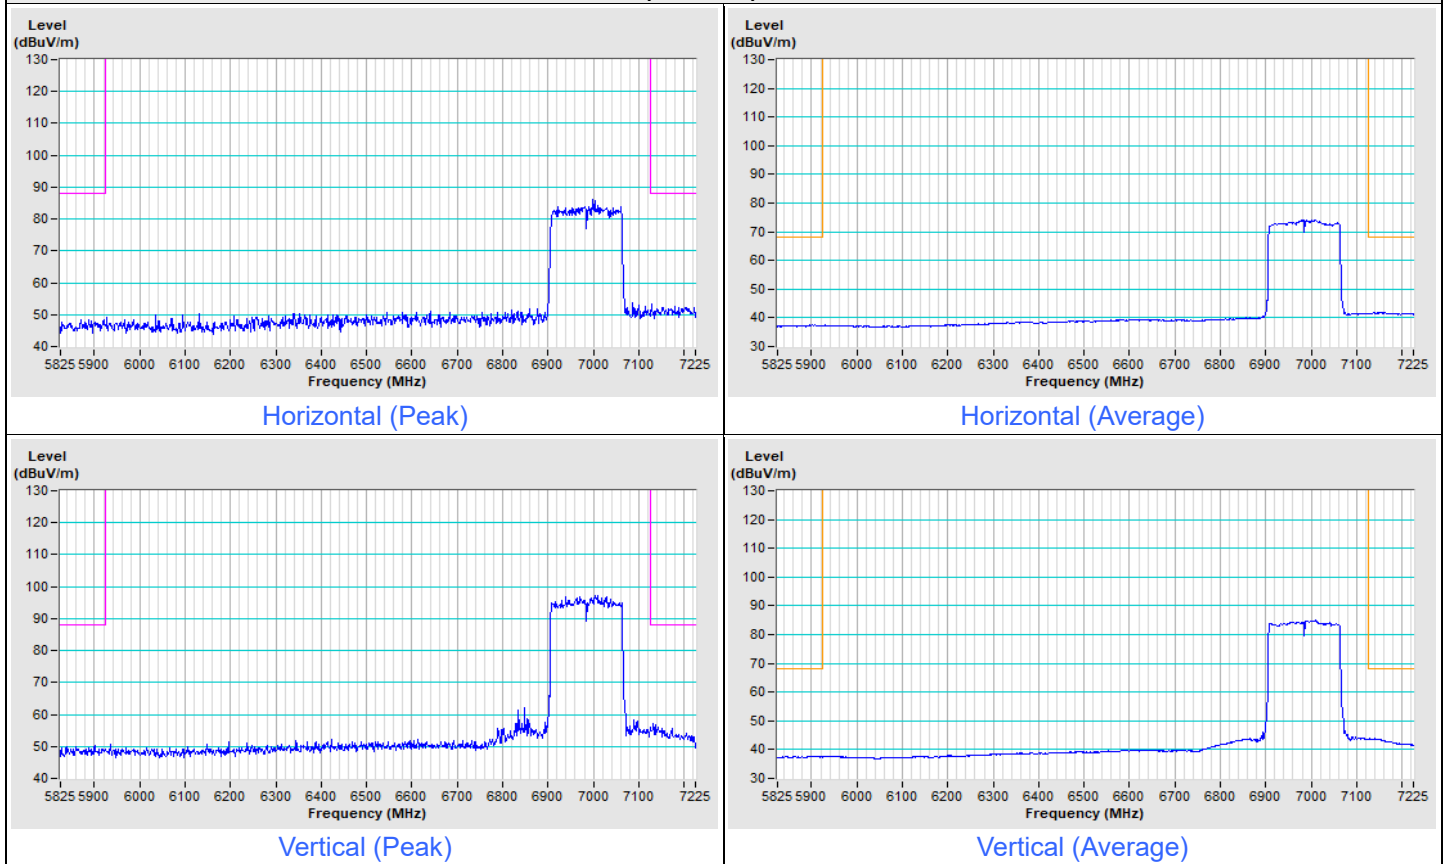


For Integration method:

802.11be (EHT20) 26-tone RU Channel 233

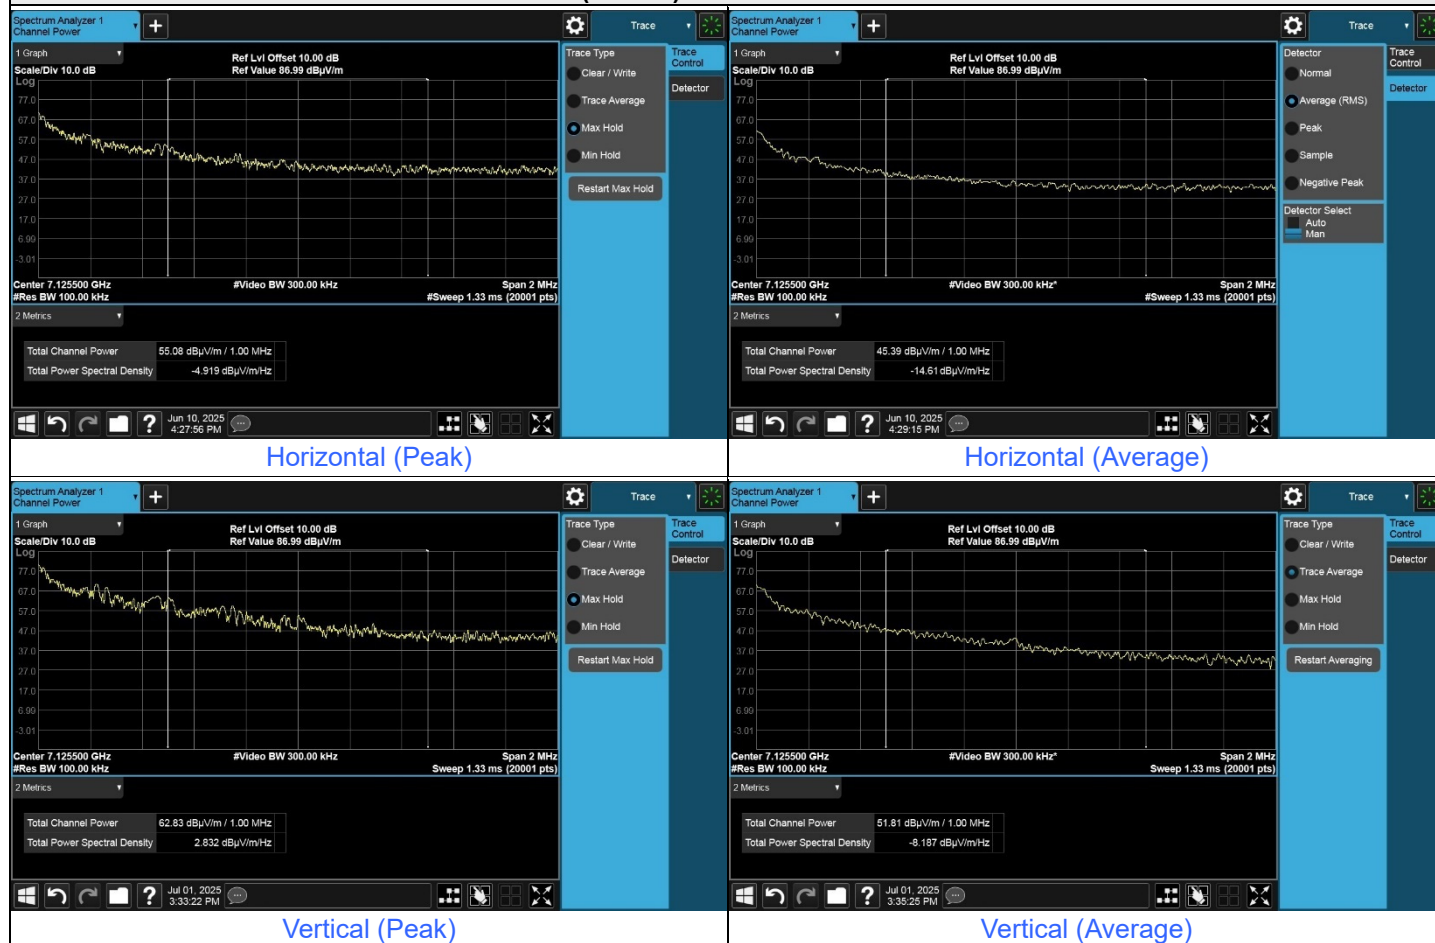


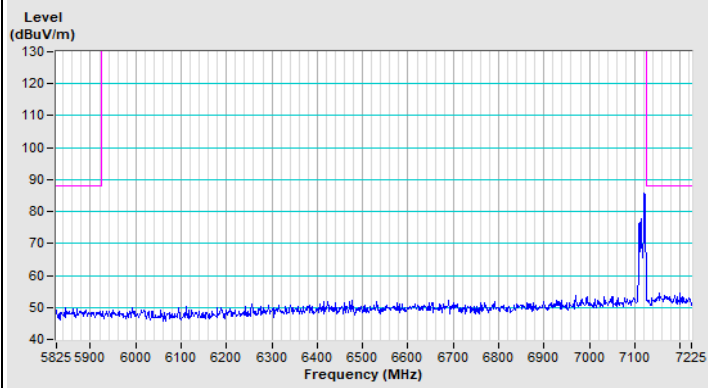802.11ax (HE20) 52-tone RU Channel 233


Horizontal (Peak)

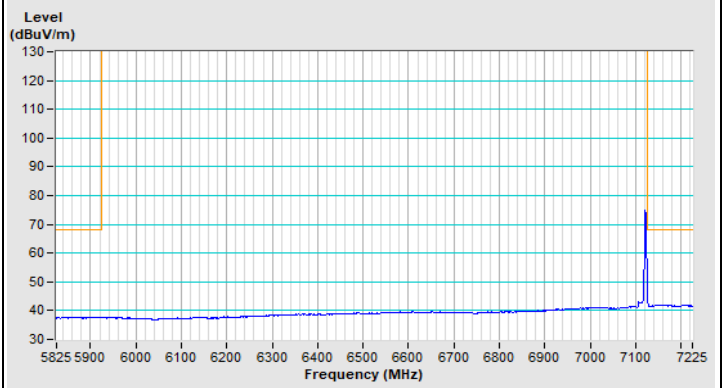

Horizontal (Average)

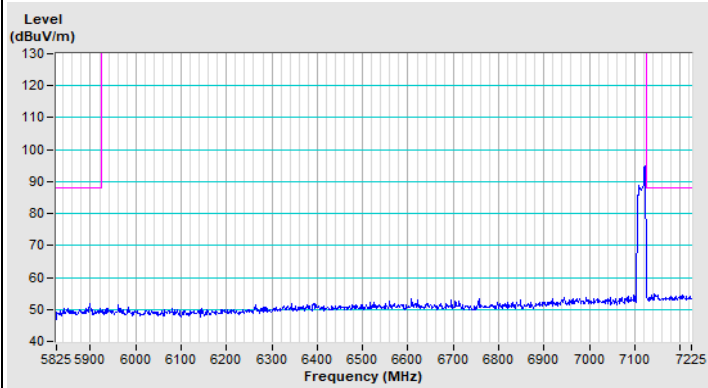


Vertical (Peak)

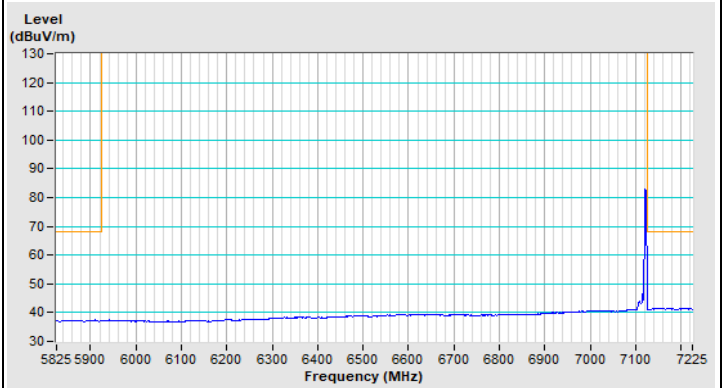


Vertical (Average)

For Integration method:


802.11be (EHT20) 26-tone RU Channel 233

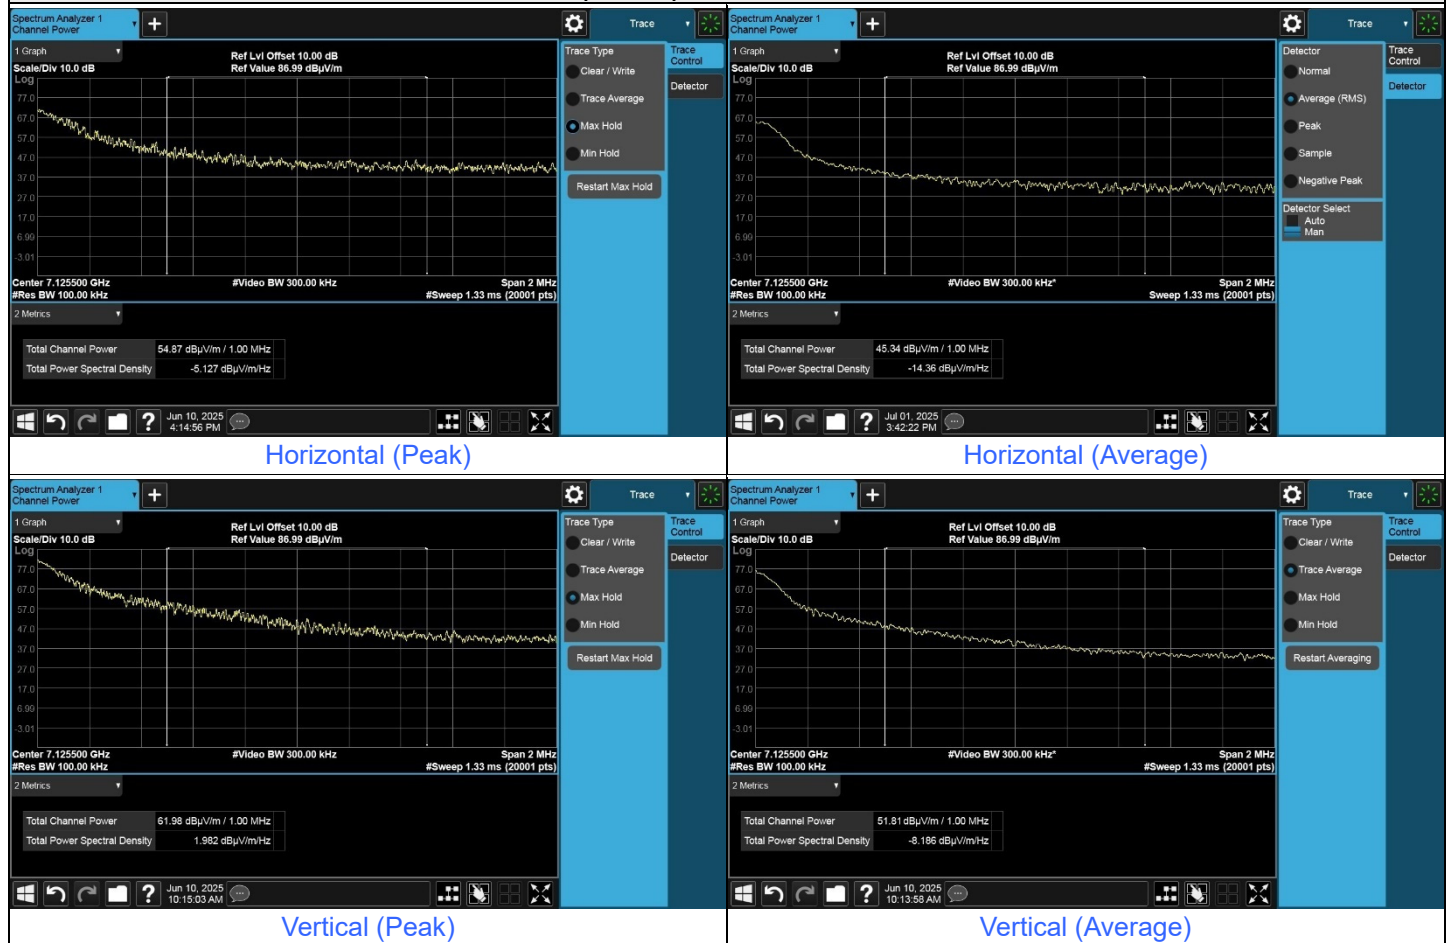


802.11be (EHT20) 52+26-tone MRU Channel 233

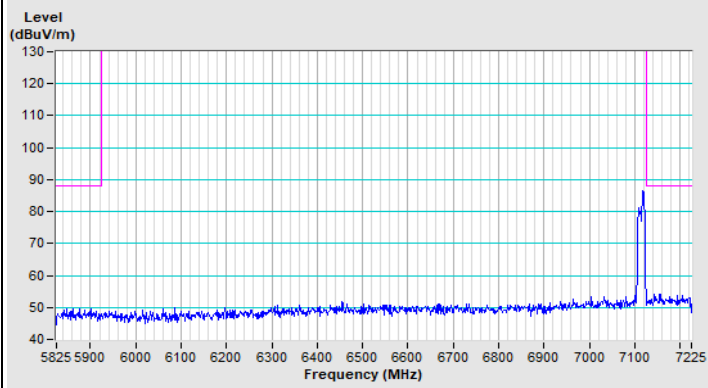


Horizontal (Peak)

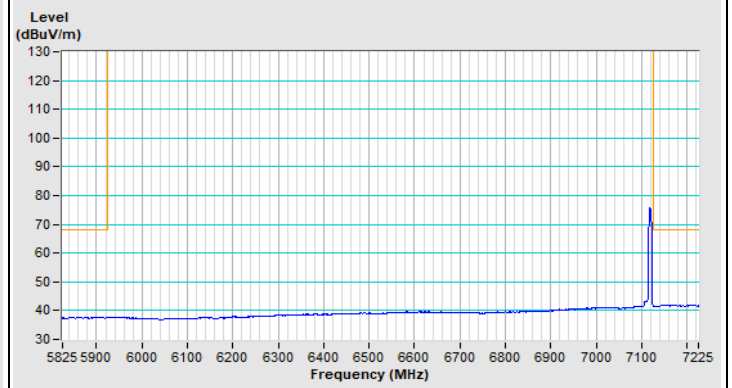

Horizontal (Average)

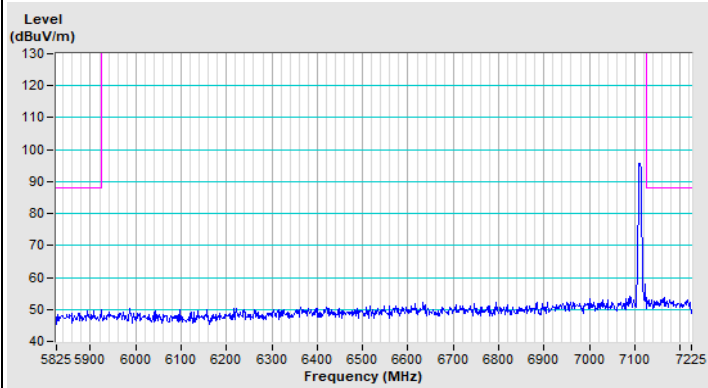


Vertical (Peak)

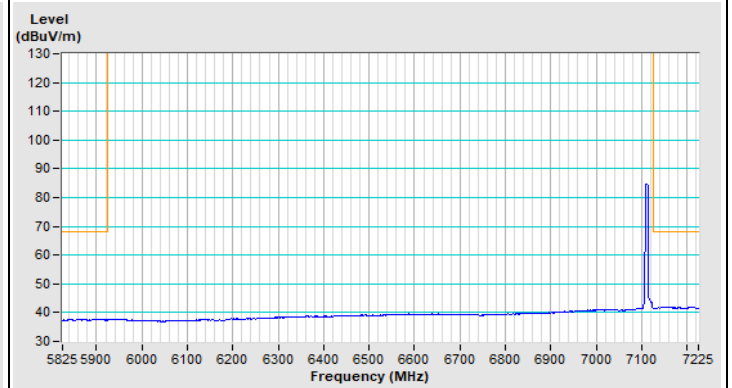

Vertical (Average)


For Integration method:

802.11be (EHT20) 106+26-tone MRU Channel 233

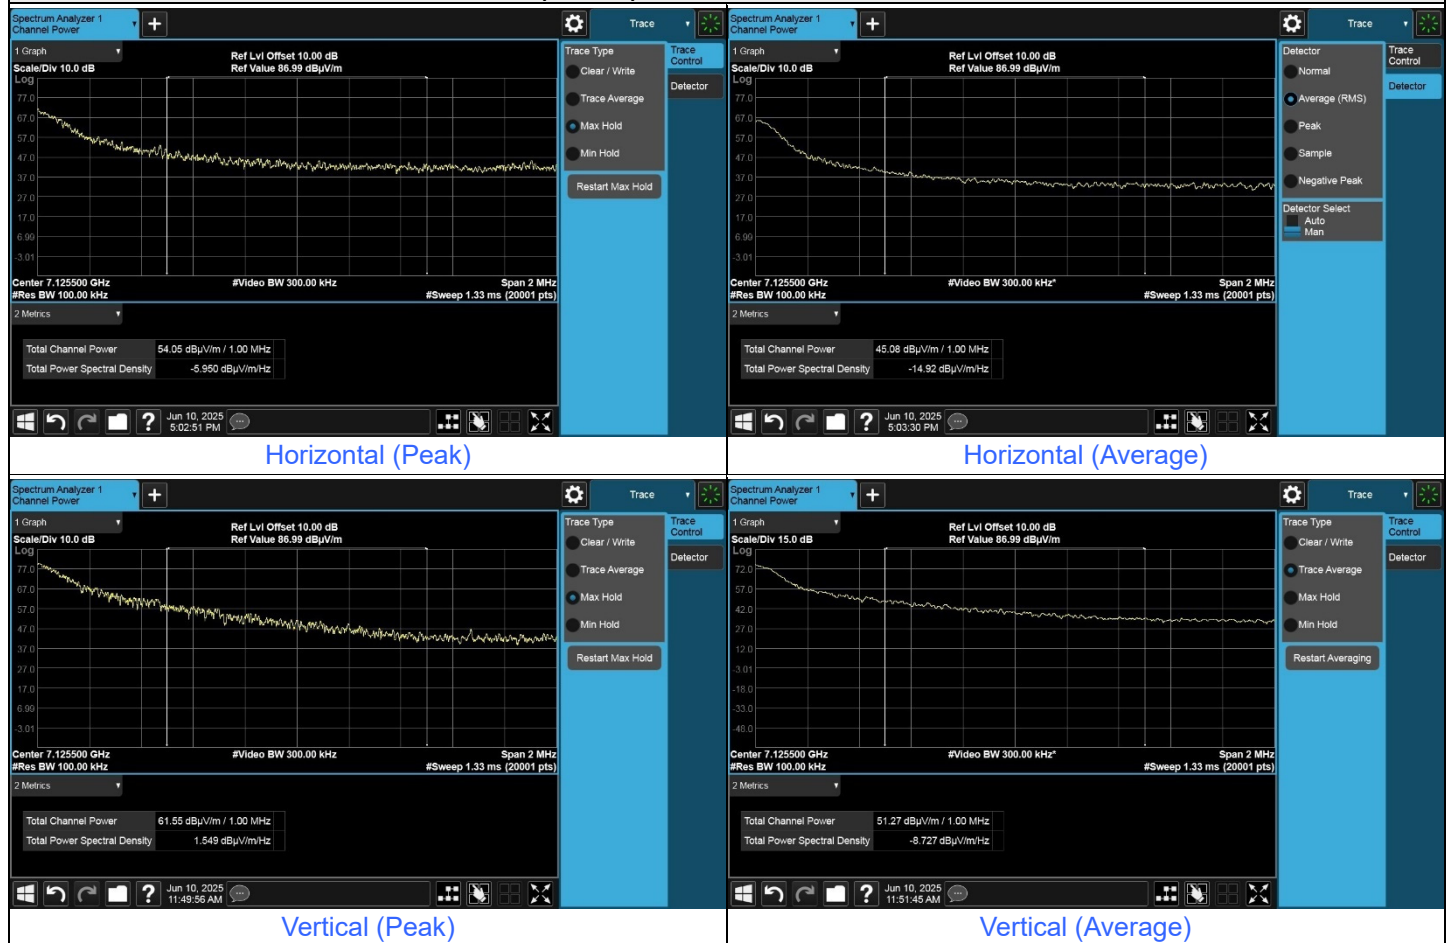


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT80) 484+242-tone MRU Channel 215

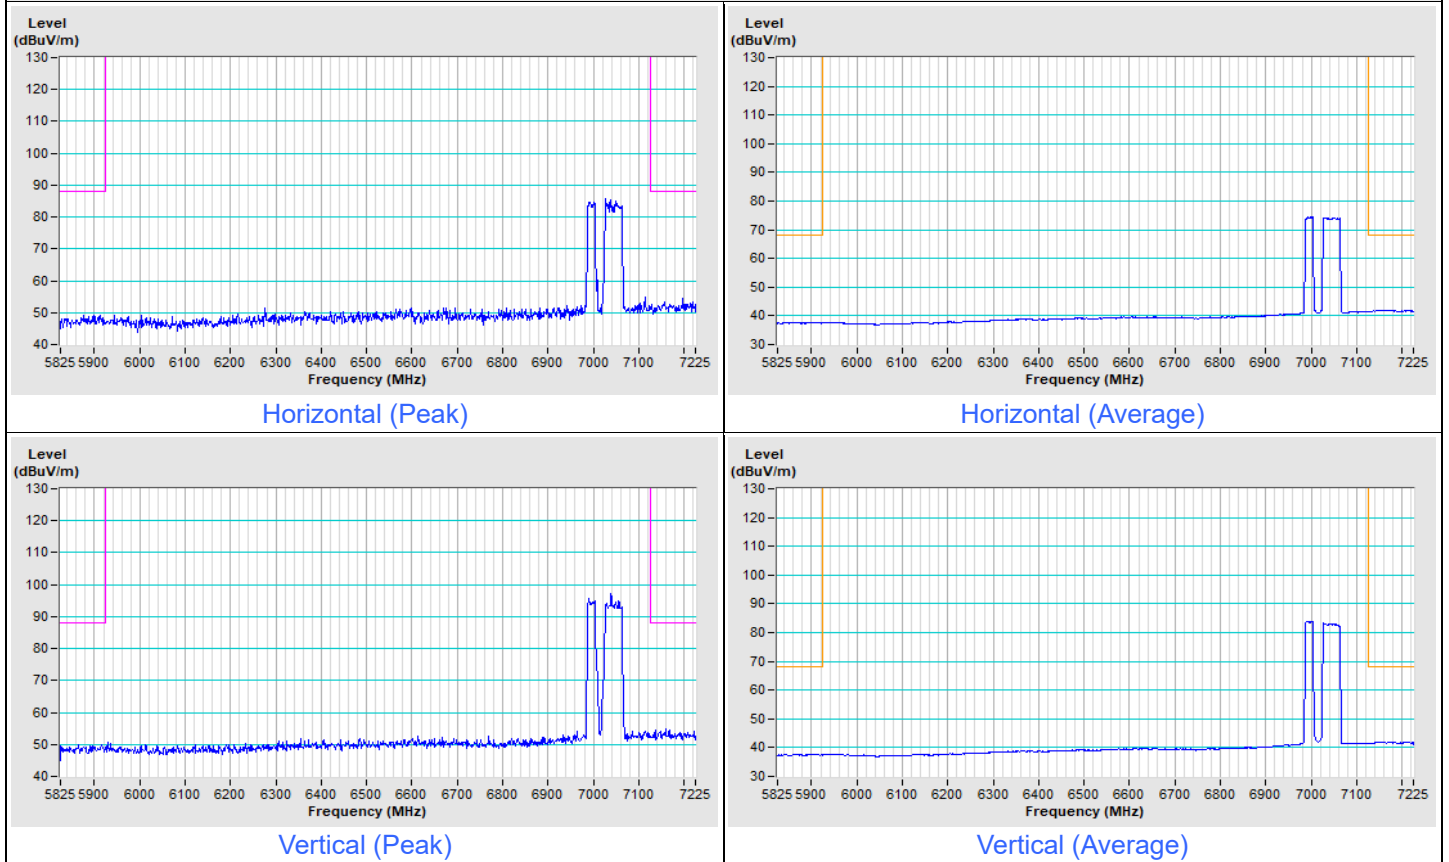


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 207

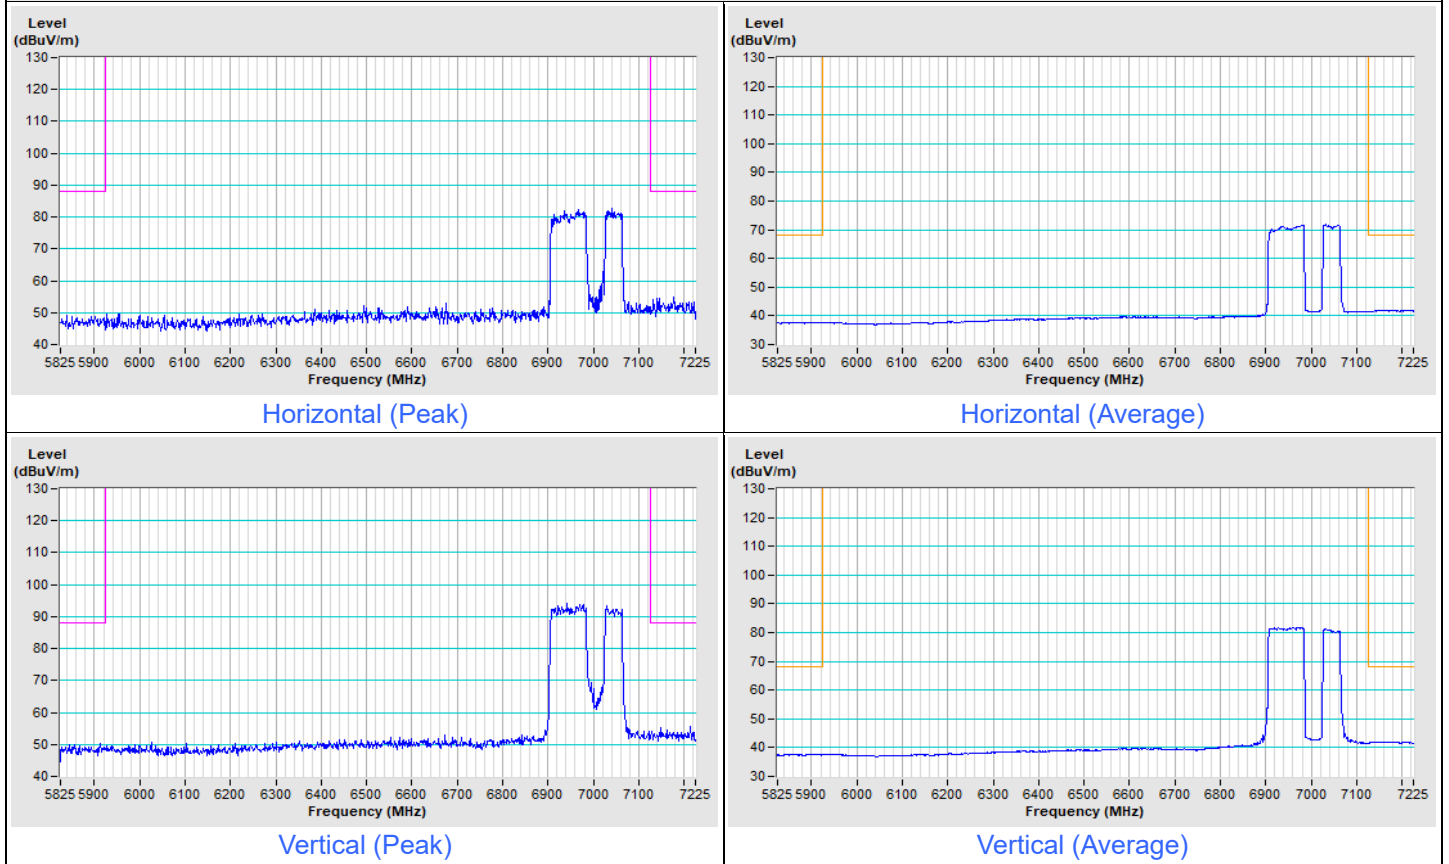


802.11be (EHT160) 996+484+242-tone MRU Channel 207

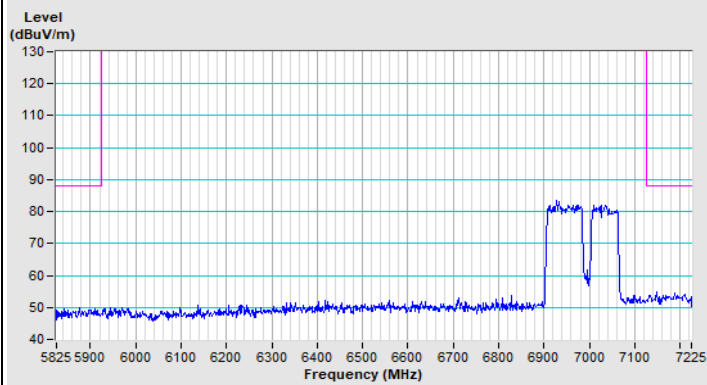


Horizontal (Peak)

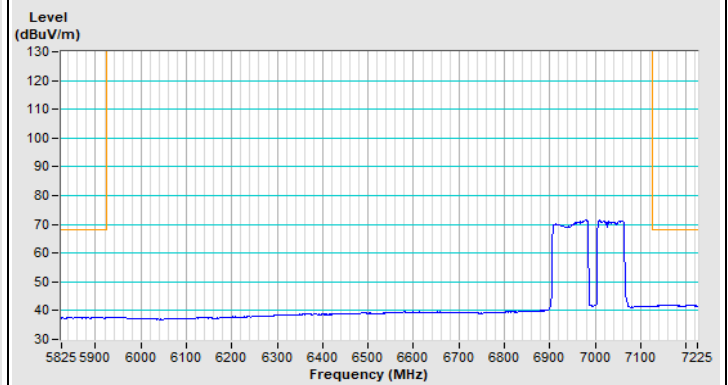

Horizontal (Average)

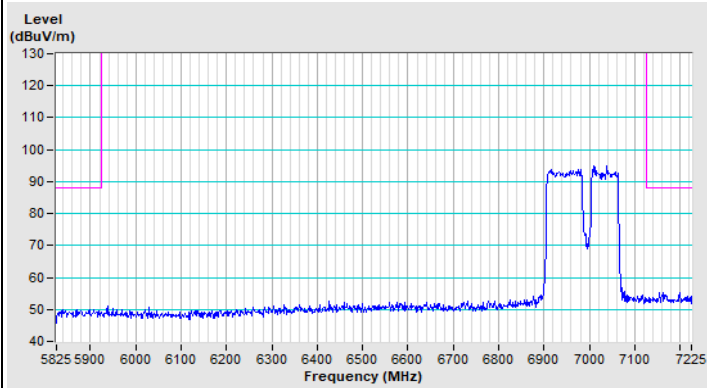

Vertical (Peak)

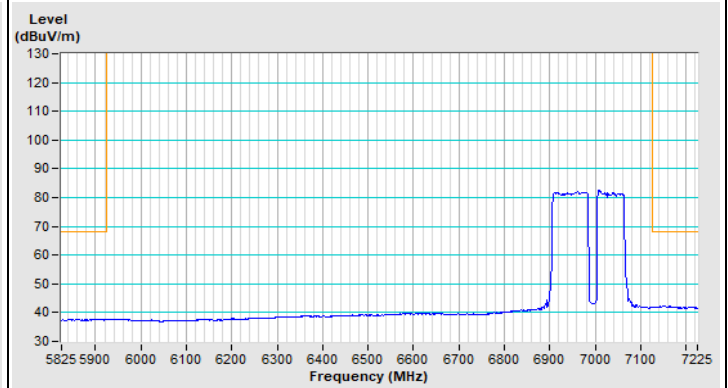

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---