




## Appendix C. Co-location Test Report

FCC ID: TX2RTL8188CEBT, IC: 6317A-RTL8188CEBT






## 1. Results of Radiated Emissions for Co-located

Temperature	23°C	Humidity	56%
Test Engineer	Sean Ku	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN


## **Horizontal**

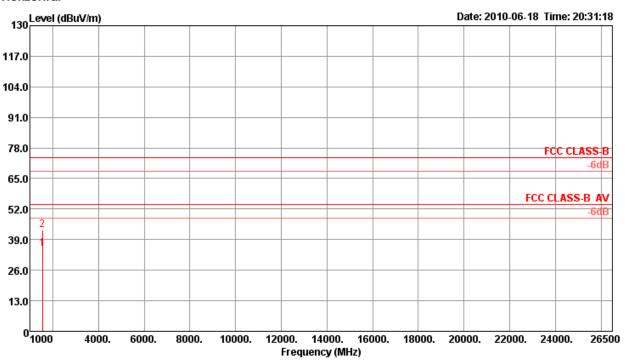

	Freq	Level				Cable PreampAntenna Loss Factor Factor		T/Pos	T/Pos A/Pos Remark		Pol/Phase		
	MHz	dBuV/m	dBuV/m	dB	dBu√	dB	dB	dB/m	deg	cm			
1	1552.24	34.98	54.00	-19.02	42.35	1.60	34.77	25.80	256	100	Average	HORIZONTAL	
2	1552.40	42.99	74.00	-31.01	50.36	1.60	34.77	25.80	256	100	Peak	HORIZONTAL	





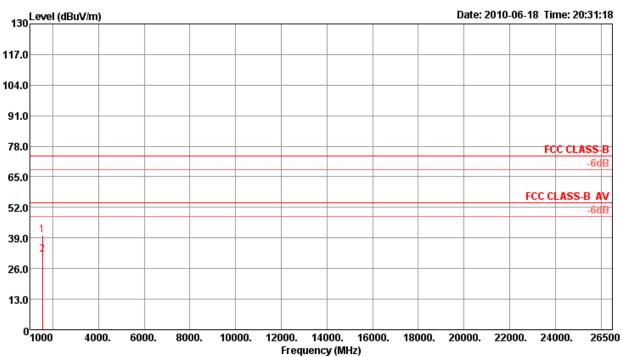

	Freq	Level				Cable PreampAntenna Loss Factor Factor			T/Pos		Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		_
1	1552.24	40.36	74.00	-33.64	47.73	1.60	34.77	25.80	306	100	Peak	VERTICAL
2	1552.46	31.84	54.00	-22.16	39.21	1.60	34.77	25.80	306	100	Average	VERTICAL