



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Realtek Semiconductor Corp.
Applicant Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
FCC ID	TX2RTL8188CUB8
Manufacturer's company	Realtek Semiconductor Corp.
Manufacturer Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Product Name	802.11b/g/n RTL8188CUS Slim Combo Card
Brand Name	Realtek
Model Name	RTL8188CUB8
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Sep. 30, 2010
Final Test Date	Oct. 30, 2010
Submission Type	Original Equipment

Statement

Test result included is only for the Bluetooth part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes.....	5
3.6. Table for Testing Locations.....	7
3.7. Table for Supporting Units	7
3.8. Table for Parameters of Test Software Setting	7
3.9. Test Configurations	8
4. TEST RESULT	12
4.1. AC Power Line Conducted Emissions Measurement.....	12
4.2. Conducted Peak Output Power Measurement.....	22
4.3. Hopping Channel Separation Measurement	24
4.4. Number of Hopping Frequency Measurement.....	32
4.5. Dwell Time Measurement.....	35
4.6. Radiated Emissions Measurement	48
4.7. Band Edge Emissions Measurement	66
4.8. Antenna Requirements	71
5. LIST OF MEASURING EQUIPMENTS	72
6. TEST LOCATION.....	74
7. TAF CERTIFICATE OF ACCREDITATION	75
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A20
APPENDIX B. TEST PHOTOS.....	B1 ~ B16
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C5
APPENDIX D. CO-LOCATION REPORT	



History of This Test Report

Original Issue Date: Nov. 01, 2010

Report No.: FROO635AB

- No additional attachment.
- Additional attachment were issued as following record:



Certificate No.: CB9911002

1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11b/g/n RTL8188CUS Slim Combo Card
Brand Name : Realtek
Model Name : RTL8188CUB8
Applicant : Realtek Semiconductor Corp.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 30, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads "Jordan Hsiao 2010.11.11".

Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	8.35 dB
4.2	15.247(b)(1)	Maximum Peak Conducted Output Power	Complies	10.67 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	2.50 dB
4.7	15.247(d)	Band Edge Emissions	Complies	4.81 dB
4.8	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From Host System
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -QPSK: 2 ; 8DPSK: 3
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	1.1840 MHz
Conducted Output Power	10.33 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

N/A

3.3. Table for Filed Antenna

<For WLAN Function>:

Ant.	Brand	Model Name	Antenna Type	Connector	Antenna Gain (dBi)	Remark
A	REALTEK	RTL8188CUB8/ RTL8188CUS	Printed Antenna	N/A	2.72	TX/RX
B	WNC	DQ661500301	PIFA Antenna	I-PEX	3.90	TX/RX

<For Bluetooth Function>:

Ant.	Brand	Model Name	Antenna Type	Connector	Antenna Gain (dBi)	Remark
A	REALTEK	RTL8188CUB8/ RTL8188CUS	Printed Antenna	N/A	0.08	TX/RX

Note:

There are two types of EUT; it would collocate with two sets of antenna.

Ant. A or Ant. B can be used as transmitting/ receiving antenna.


The antenna position is illustrated as below:

<For Ant. A (Printed Antenna) Position>:

The front side of EUT




The rear side of EUT

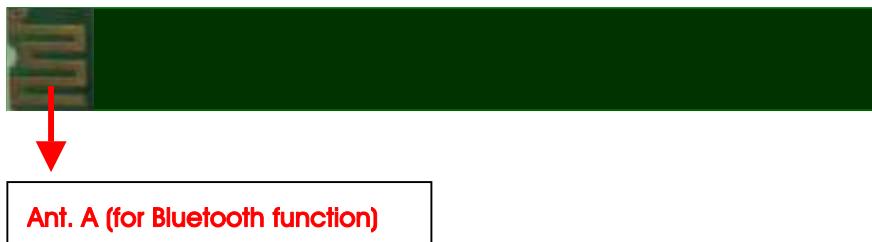

<For Ant. B (PIFA Antenna) Position>:

The front side of EUT

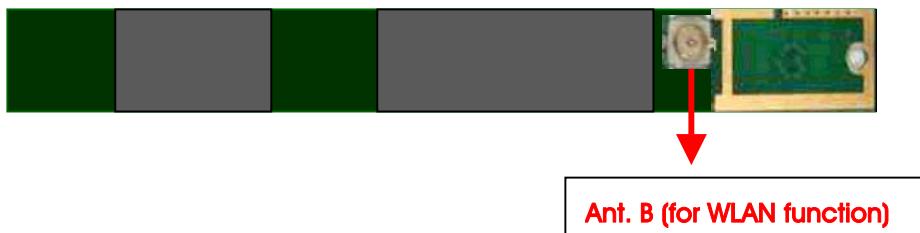

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	Normal Link	-	-	-
Max. Conducted Output Power	8DPSK	3 Mbps	0/39/78	NA
Hopping Channel Separation	8DPSK	3 Mbps	0~1/39~40/77~78	NA
Number of Hopping Frequency	8DPSK	3 Mbps	0~78	NA
Dwell Time	3DH1/3DH3/3DH5	3 Mbps	0/39/78	NA
Radiated Emissions Below 1GHz	8DPSK	3 Mbps	39	A
Radiated Emissions Above 1GHz	8DPSK	3 Mbps	0/39/78	A
Band Edge Emissions	8DPSK	3 Mbps	0/78	A

Note:

All the test modes were listed as following table.

Product Description:				
There are two types of EUT; it would collocate with two sets of antenna.				
The EUT could be divided into main source and second source.				
The difference between main source and second source is the manufacture of PCBA component.				
Glist	Product Detail		WLAN Function	
	Printed Antenna (Ant. A)		PIFA Antenna (Ant. B)	Printed Antenna (Ant. A)
Conducted Emissions and Radiated Emissions Test Below 1GHz				
Main Source	Mode 1	V	-	V
	Mode 2	-	V	V
Second Source	Mode 1	V	-	V
	Mode 2	-	V	V
Radiated Emissions Test Above 1GHz and Other Tests				
Main Source	Mode 1	-	-	V
Second Source	Mode 1	-	-	V
MPE and Co-location Test				
Mode 1: Main Source + Wireless LAN function + Bluetooth function				
Mode 2: Second Source + Wireless LAN function + Bluetooth function				
All the test modes were tested and recorded in this report.				
Remark:				
The EUT could be applied with Bluetooth and wireless LAN function; therefore Maximum Permissible Exposure (please refer to Appendix C) and Co-location (please refer to Appendix D) tests are added for simultaneously transmit between Bluetooth and wireless LAN function.				

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	187376	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	187376	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	D400	E2K24GBRL
Wireless AP	Planex	GW-AP54SGX	N/A
USB Fixture	-	-	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Main Source – Mode 1 with Printed Antenna>:

Power Parameters of Bluetooth

Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	105	105	105

<For Second Source - Mode 1 with Printed Antenna>:

Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	105	105	105

During the test, "Bluetest" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.



3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration



<For Bluetooth Function>:

Test Configuration: 9KHz~1GHz

<For Main Source, Second Source— Mode 1>

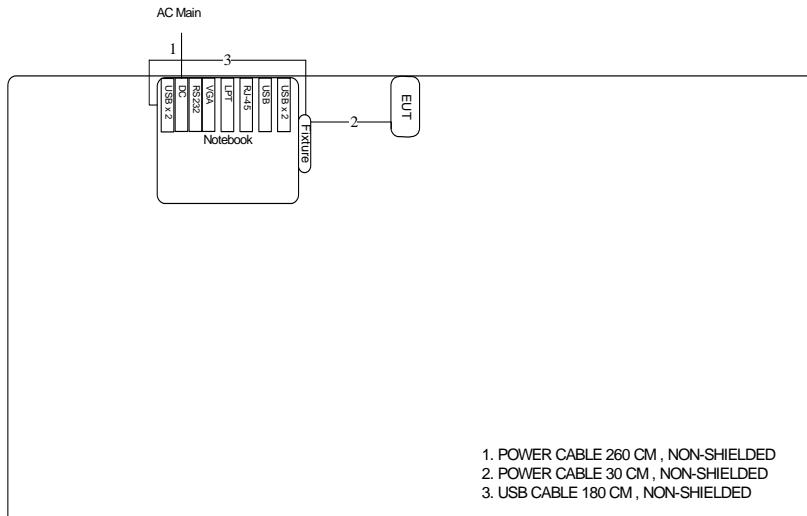


<For Main Source, Second Source— Mode 2>:

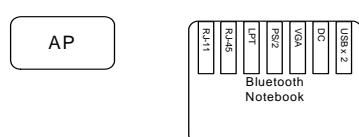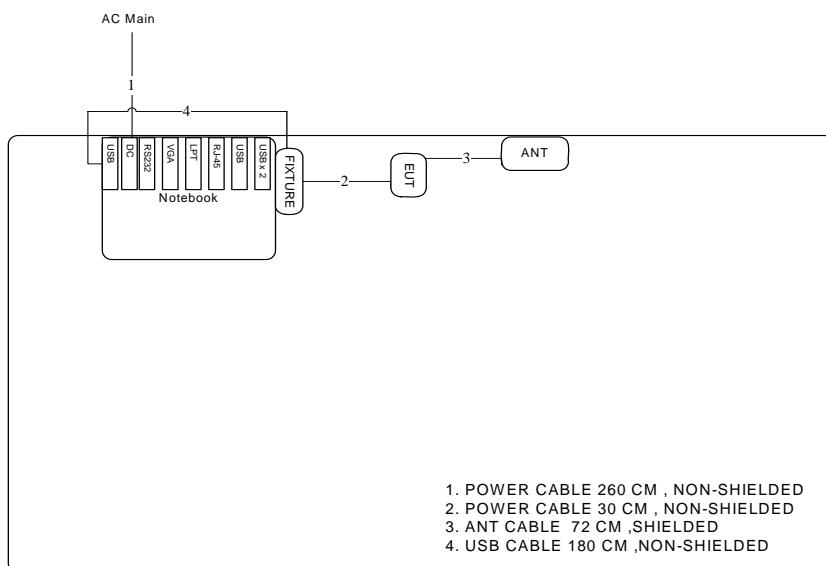


<For Bluetooth Function>:

Test Configuration: above 1GHz

<For Main Source, Second Source— Mode 1 >

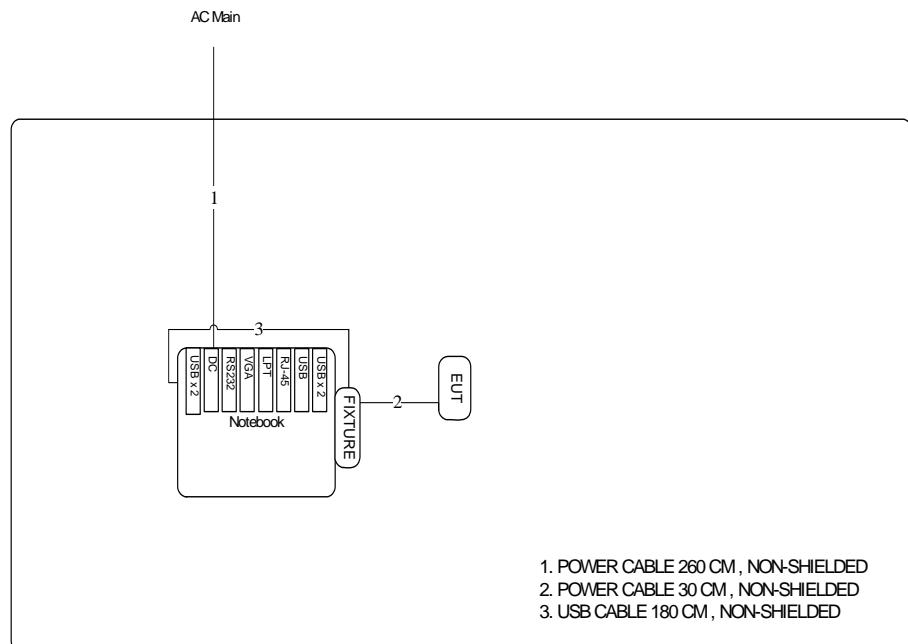


<For Main Source, Second Source— Mode 2>

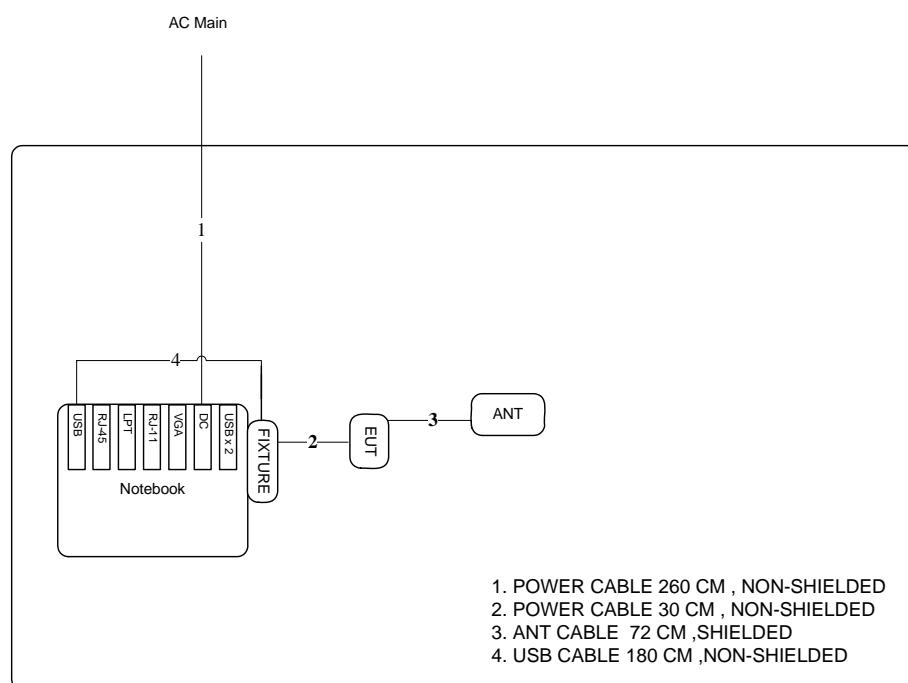


<For Co-location>:

<For Main Source, Second Source— Mode 1 >

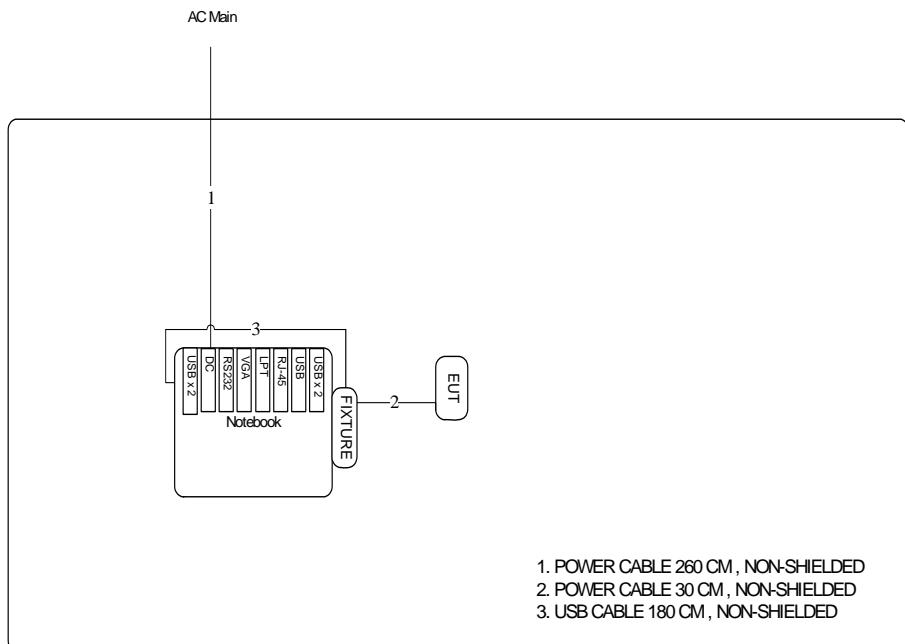


<For Main Source, Second Source— Mode 2>

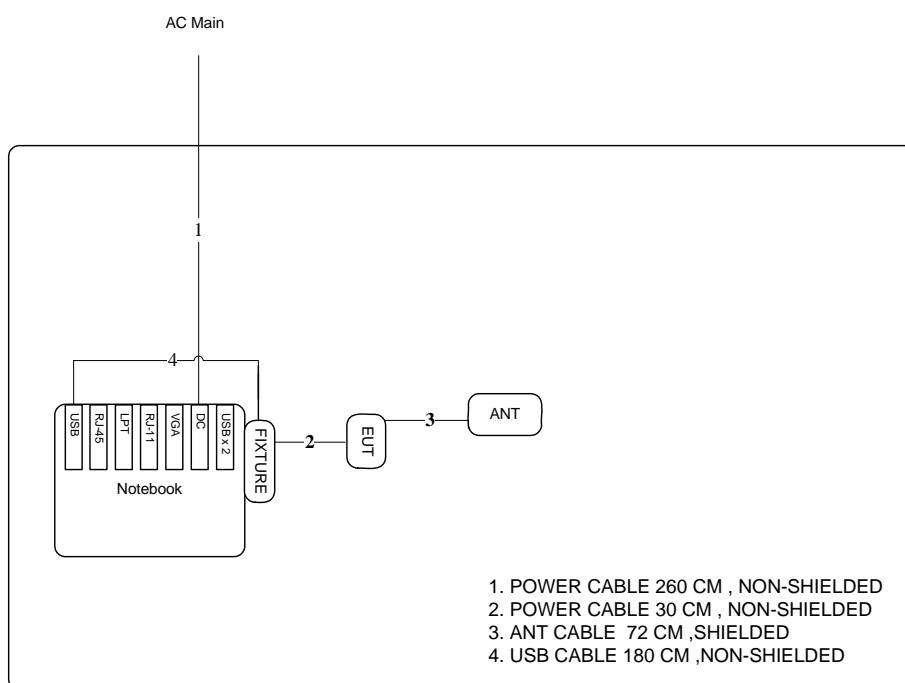


3.9.2. AC Power Line Conduction Emissions Test Configuration

<For Main Source, Second Source – Mode 1>:

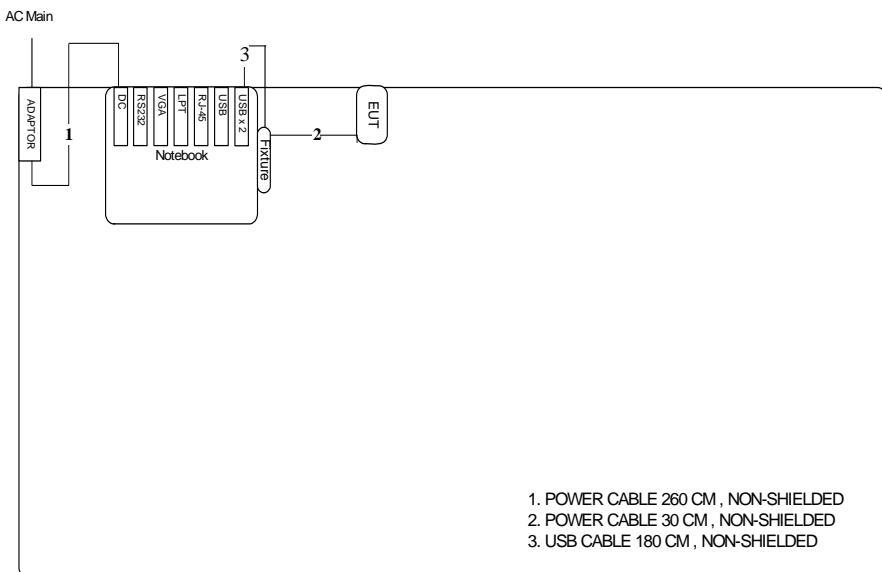

<For Main Source, Second Source – Mode 2>

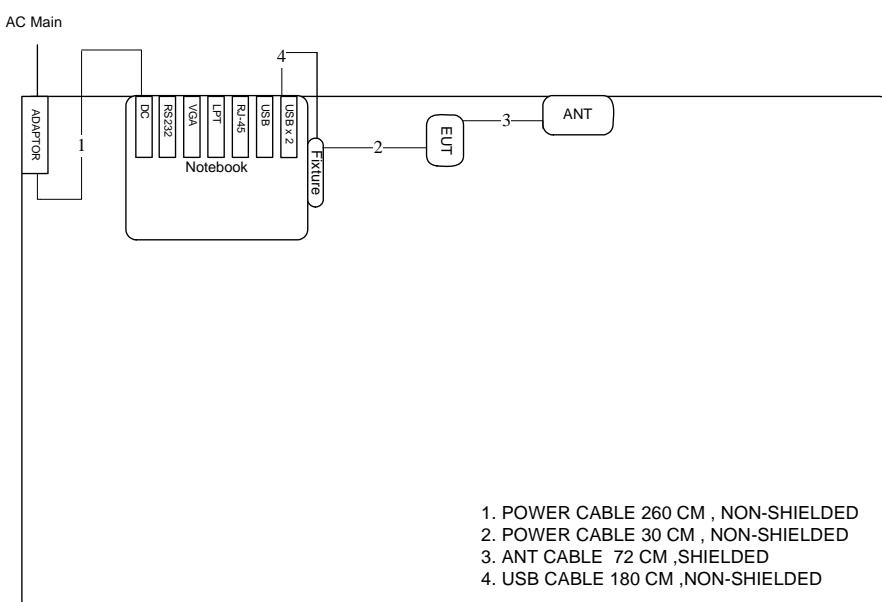

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

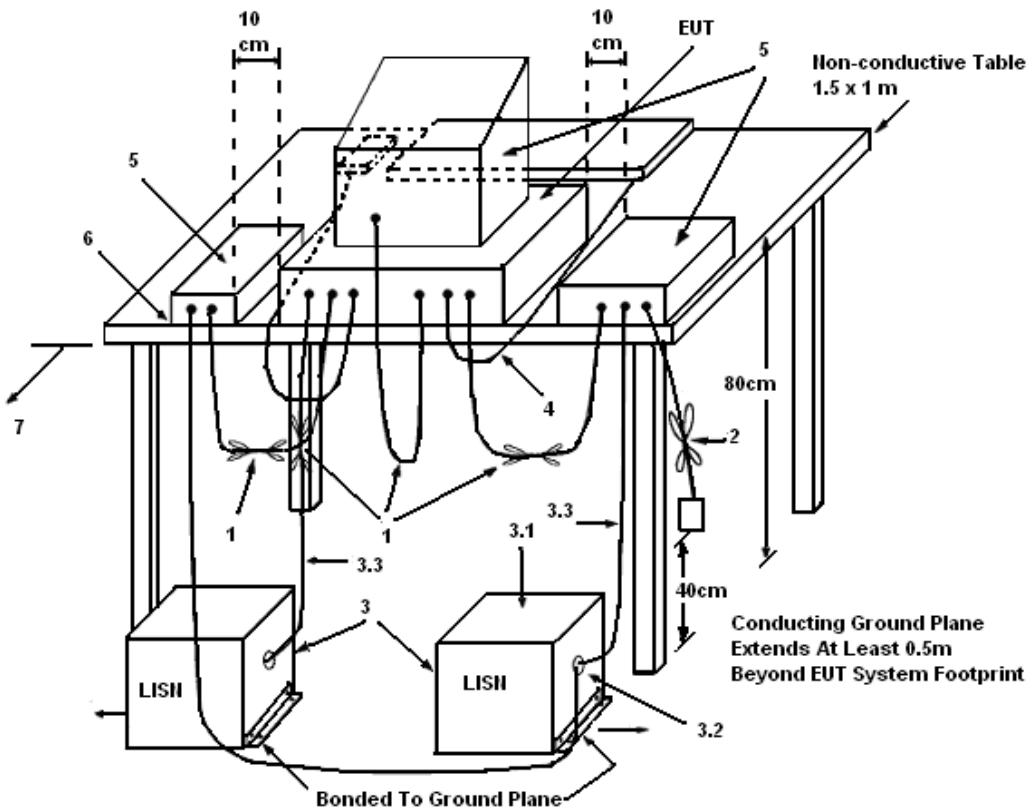

4.1.5. Test Deviation

There is no deviation with the original standard.


4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


<For Main Source – Mode 1>:

Temperature	23°C	Humidity	55%
Test Engineer	Beck Wu	Phase	Line
Configuration	Normal Link		

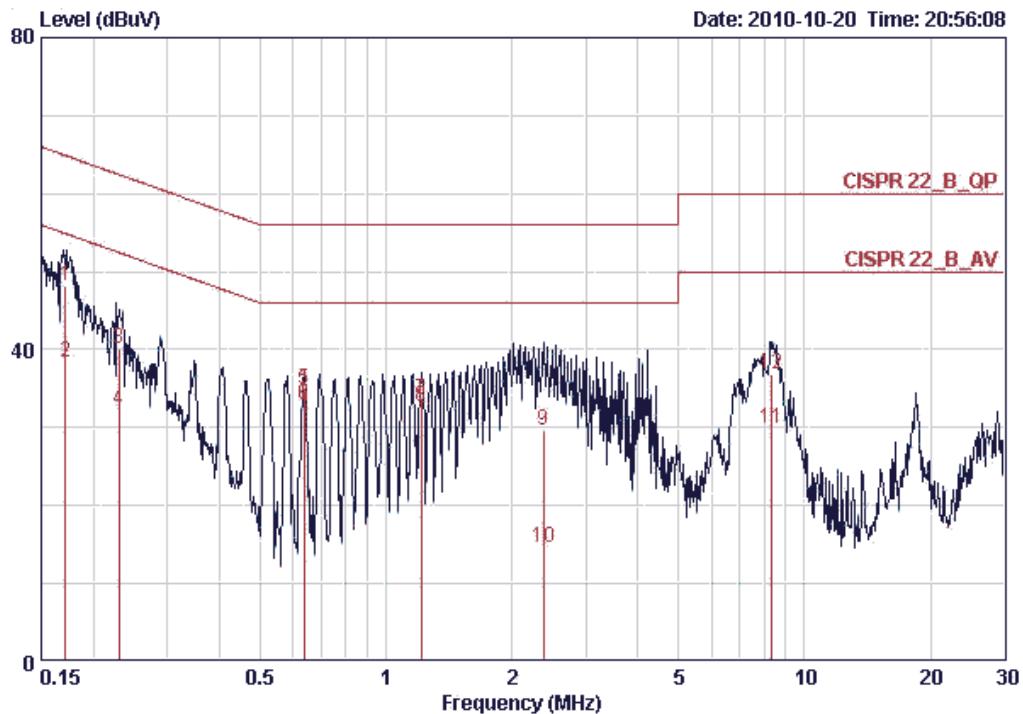

Freq	Level	Over	Limit	Read	LISN	Cable
		Limit	Line	Level	Factor	Loss
MHz	dBuV	dB	dBuV	dBuV	dB	dB
1	0.17119	48.17	-16.73	64.90	47.91	0.06
2	0.17119	38.35	-16.55	54.90	38.09	0.06
3	0.23040	40.11	-22.33	62.44	39.86	0.05
4	0.23040	32.33	-20.11	52.44	32.08	0.05
5	0.63720	34.96	-21.04	56.00	34.73	0.03
6	0.63720	32.92	-13.08	46.00	32.69	0.03
7	1.216	33.66	-22.34	56.00	33.47	0.04
8	1.216	32.76	-13.24	46.00	32.57	0.04
9	2.384	29.74	-26.26	56.00	29.48	0.06
10	2.384	14.50	-31.50	46.00	14.24	0.06
11	8.323	29.78	-20.22	50.00	29.14	0.30
12	8.323	36.93	-23.07	60.00	36.29	0.30

Temperature	23°C	Humidity	55%
Test Engineer	Beck Wu	Phase	Neutral
Configuration	Normal Link		

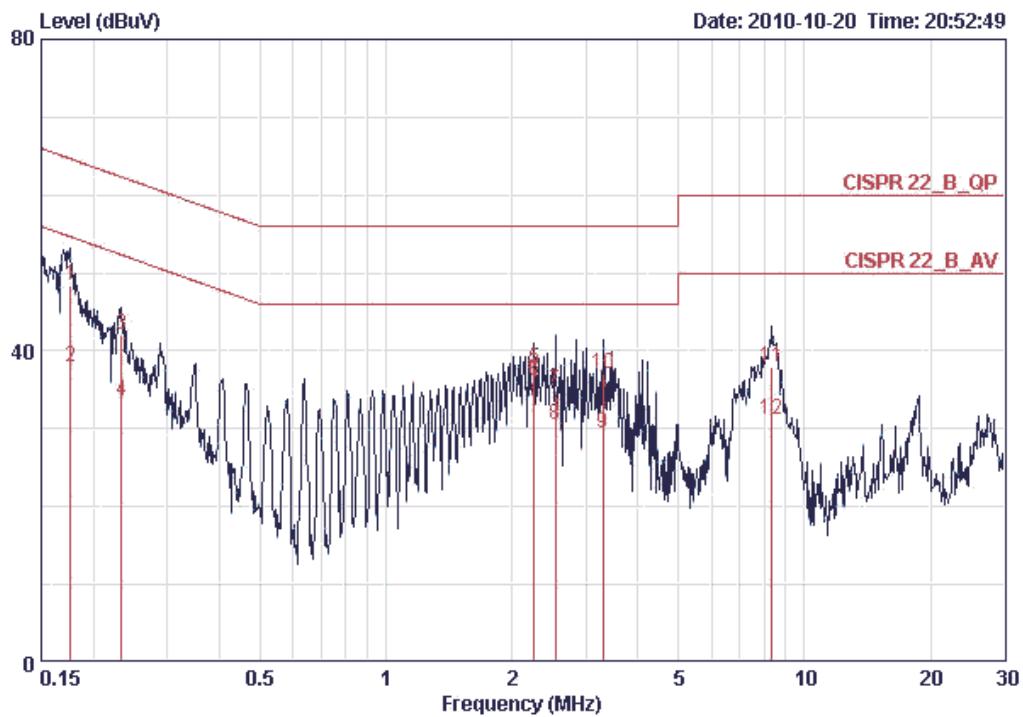


Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	dBuV	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17584	48.44	-16.24	64.68	48.15	0.09	0.20 QP
2	0.17584	37.96	-16.72	54.68	37.67	0.09	0.20 AVERAGE
3	0.23285	42.16	-20.19	62.35	41.88	0.08	0.20 QP
4	0.23285	33.56	-18.79	52.35	33.28	0.08	0.20 AVERAGE
5	2.254	37.81	-18.19	56.00	37.51	0.10	0.20 QP
6	2.254	36.12	-9.88	46.00	35.82	0.10	0.20 AVERAGE
7	2.540	34.87	-21.13	56.00	34.56	0.11	0.20 QP
8	2.540	30.43	-15.57	46.00	30.12	0.11	0.20 AVERAGE
9	3.293	29.50	-16.50	46.00	29.11	0.13	0.26 AVERAGE
10	3.293	37.06	-18.94	56.00	36.67	0.13	0.26 QP
11	8.367	37.91	-22.09	60.00	37.25	0.34	0.32 QP
12	8.367	31.22	-18.78	50.00	30.56	0.34	0.32 AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.


<For Main Source -Mode 2>:

Temperature	23°C	Humidity	55%
Test Engineer	Beck Wu	Phase	Line
Configuration	Normal Link		

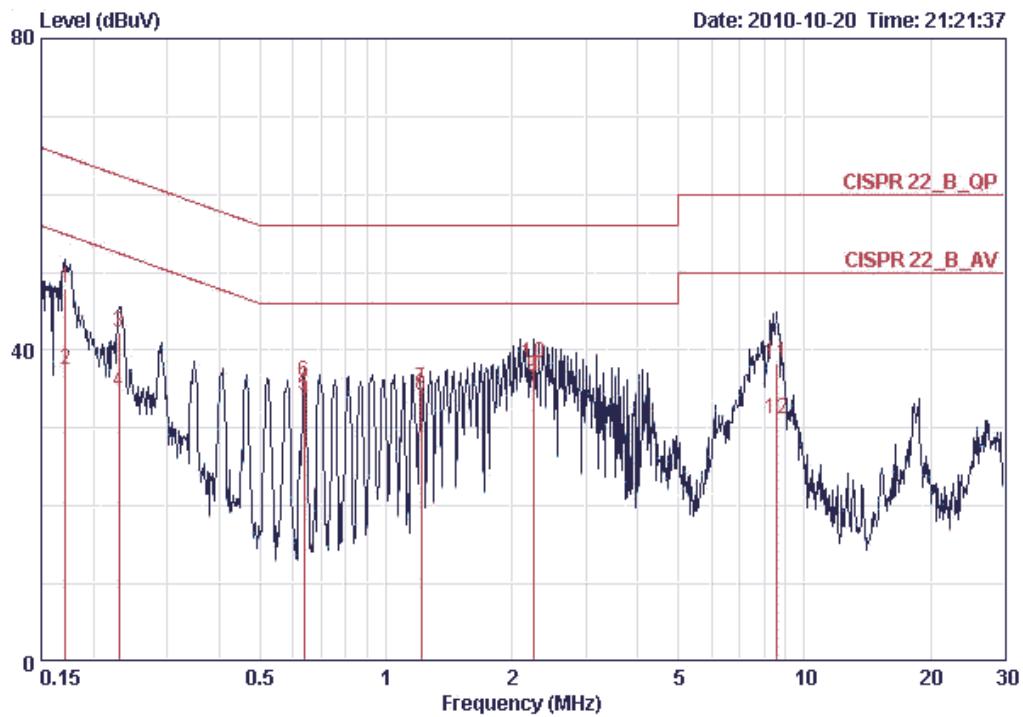

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	dBuV	Level	Factor	dB	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17125	47.97	-16.93	64.90	47.71	0.06	0.20 QP
2	0.17125	37.46	-17.44	54.90	37.20	0.06	0.20 AVERAGE
3	0.23040	42.21	-20.23	62.44	41.96	0.05	0.20 QP
4	0.23040	34.59	-17.85	52.44	34.34	0.05	0.20 AVERAGE
5	0.63720	34.14	-11.86	46.00	33.91	0.03	0.20 AVERAGE
6	0.63720	35.89	-20.11	56.00	35.66	0.03	0.20 QP
7	1.216	34.99	-21.01	56.00	34.80	0.04	0.15 QP
8	1.216	34.13	-11.87	46.00	33.94	0.04	0.15 AVERAGE
9	2.254	36.71	-9.29	46.00	36.45	0.06	0.20 AVERAGE
10	2.254	38.40	-17.60	56.00	38.14	0.06	0.20 QP
11	8.592	38.39	-21.61	60.00	37.78	0.31	0.30 QP
12	8.592	31.22	-18.78	50.00	30.61	0.31	0.30 AVERAGE

Temperature	23°C	Humidity	54%
Test Engineer	Beck Wu	Phase	Neutral
Configuration	Normal Link		

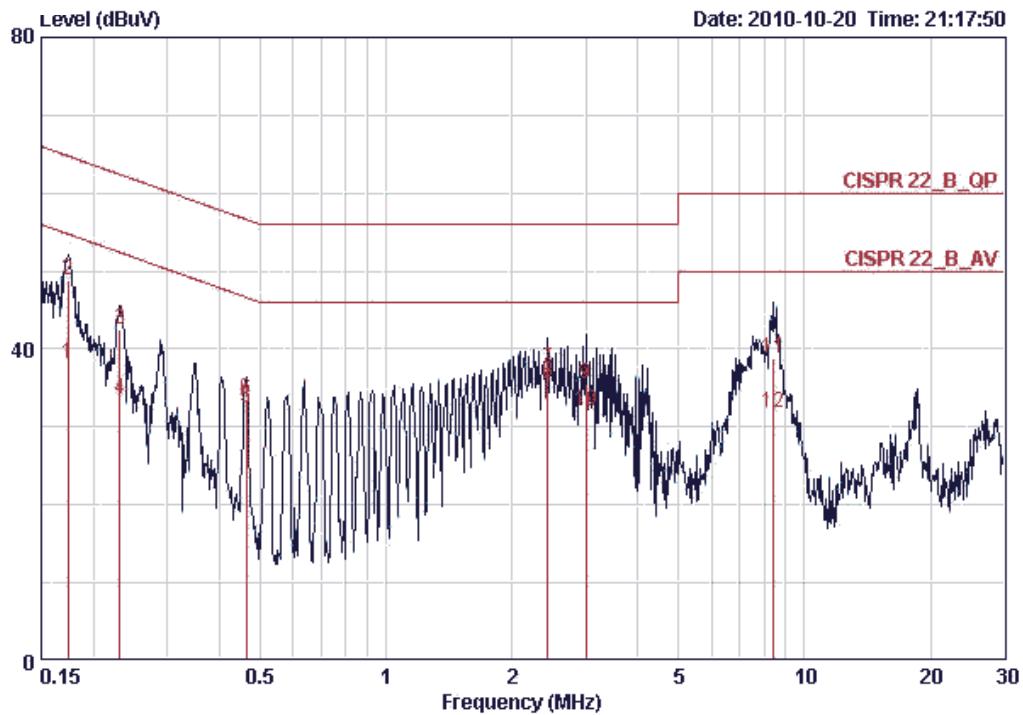


Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	Limit	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17399	38.21	-16.56	54.77	37.92	0.09	0.20 AVERAGE
2	0.17399	48.74	-16.03	64.77	48.45	0.09	0.20 QP
3	0.23162	42.42	-19.97	62.39	42.14	0.08	0.20 QP
4	0.23162	33.56	-18.83	52.39	33.28	0.08	0.20 AVERAGE
5	0.46367	32.53	-14.10	46.63	32.26	0.07	0.20 AVERAGE
6	0.46367	33.67	-22.96	56.63	33.40	0.07	0.20 QP
7	2.430	37.43	-18.57	56.00	37.13	0.10	0.20 QP
8	2.430	35.78	-10.22	46.00	35.48	0.10	0.20 AVERAGE
9	3.009	35.50	-20.50	56.00	35.17	0.12	0.21 QP
10	3.009	32.07	-13.93	46.00	31.74	0.12	0.21 AVERAGE
11	8.412	38.70	-21.30	60.00	38.04	0.34	0.32 QP
12	8.412	31.74	-18.26	50.00	31.08	0.34	0.32 AVERAGE

Note:


Level = Read Level + LISN Factor + Cable Loss.

<For Second Source – Mode 1>:

Temperature	23°C	Humidity	55%
Test Engineer	Beck Wu	Phase	Line
Configuration	Normal Link		

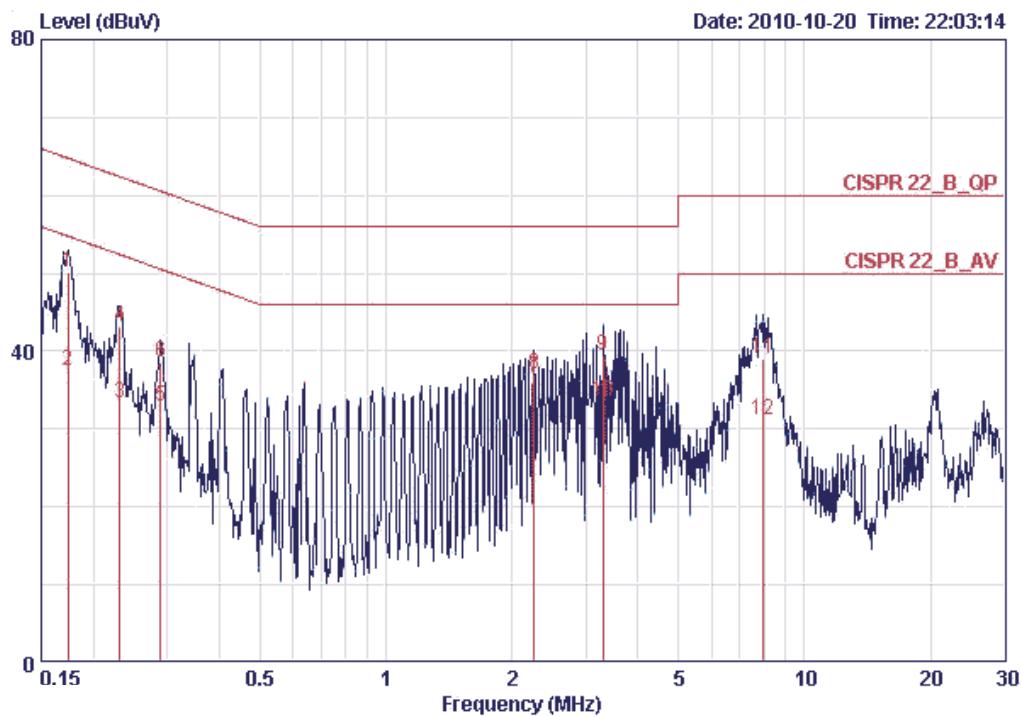

Temperature	23°C	Humidity	55%
Test Engineer	Beck Wu	Phase	Neutral
Configuration	Normal Link		

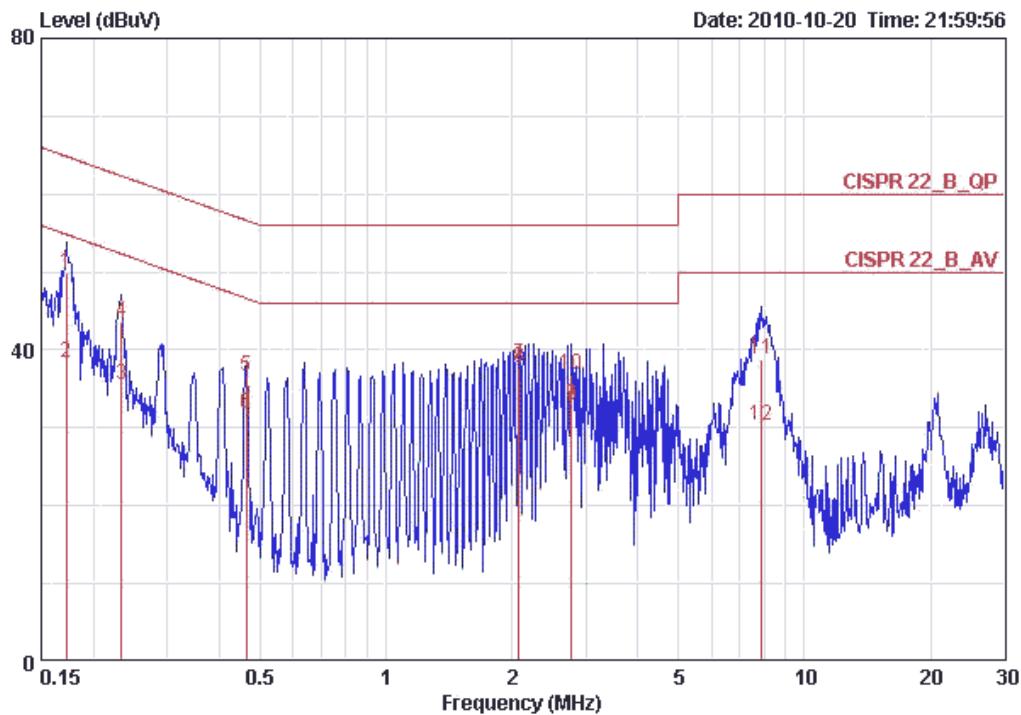


Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		MHz	dBuV	dB	Line	Level	
1	0.17215	49.96	-14.89	64.86	49.67	0.09	0.20 QP
2	0.17215	38.26	-16.59	54.86	37.97	0.09	0.20 AVERAGE
3	0.23285	35.52	-16.83	52.35	35.24	0.08	0.20 AVERAGE
4	0.23285	43.49	-18.86	62.35	43.21	0.08	0.20 QP
5	0.46367	36.71	-19.92	56.63	36.44	0.07	0.20 QP
6	0.46367	31.85	-14.78	46.63	31.58	0.07	0.20 AVERAGE
7	2.080	38.14	-17.86	56.00	37.85	0.09	0.20 QP
8	2.080	37.65	-8.35	46.00	37.36	0.09	0.20 AVERAGE
9	2.774	32.97	-13.03	46.00	32.66	0.11	0.20 AVERAGE
10	2.774	36.87	-19.13	56.00	36.56	0.11	0.20 QP
11	7.852	38.71	-21.29	60.00	37.99	0.32	0.40 QP
12	7.852	30.23	-19.77	50.00	29.51	0.32	0.40 AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.


<For Second Source -Mode 2>:

Temperature	23°C	Humidity	55%
Test Engineer	Beck Wu	Phase	Line
Configuration	Normal Link		

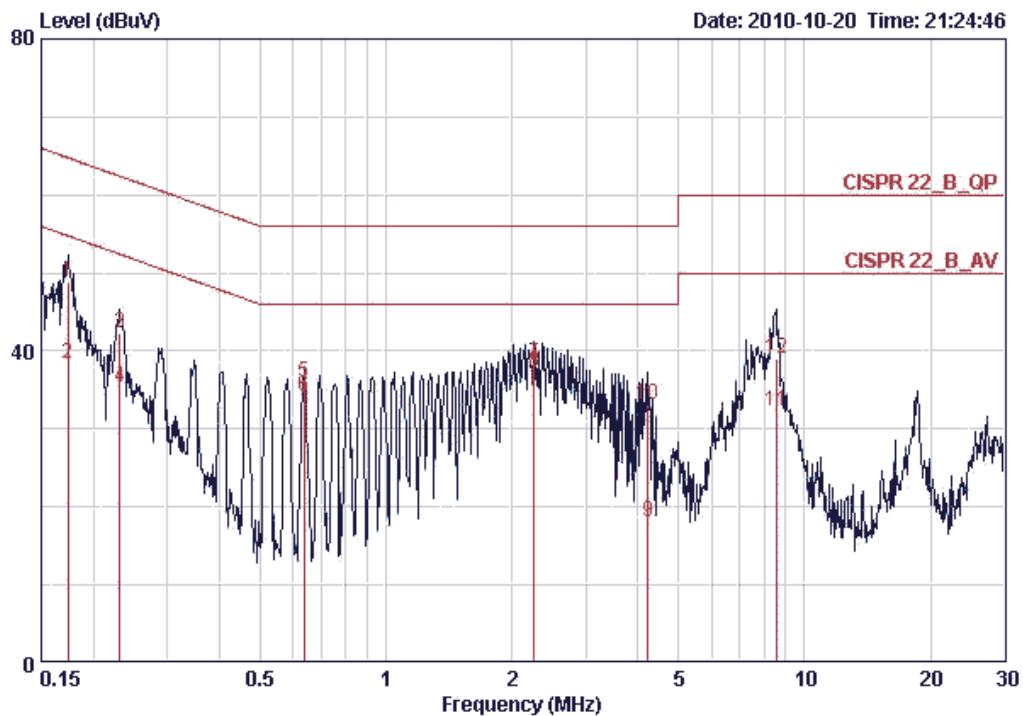

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		MHz	dBuV	dB	Line	Level	
1	0.17399	48.87	-15.90	64.77	48.61	0.06	0.20 QP
2	0.17399	38.45	-16.32	54.77	38.19	0.06	0.20 AVERAGE
3	0.23162	42.27	-20.13	62.39	42.02	0.05	0.20 QP
4	0.23162	35.25	-17.15	52.39	35.00	0.05	0.20 AVERAGE
5	0.63683	36.03	-19.97	56.00	35.80	0.03	0.20 QP
6	0.63683	34.32	-11.68	46.00	34.09	0.03	0.20 AVERAGE
7	2.255	38.44	-17.56	56.00	38.18	0.06	0.20 QP
8	2.255	37.17	-8.83	46.00	36.91	0.06	0.20 AVERAGE
9	4.224	18.17	-27.83	46.00	17.75	0.12	0.30 AVERAGE
10	4.224	33.16	-22.84	56.00	32.74	0.12	0.30 QP
11	8.546	32.34	-17.66	50.00	31.73	0.31	0.30 AVERAGE
12	8.546	39.08	-20.92	60.00	38.47	0.31	0.30 QP

Temperature	23°C	Humidity	55%
Test Engineer	Beck Wu	Phase	Neutral
Configuration	Normal Link		

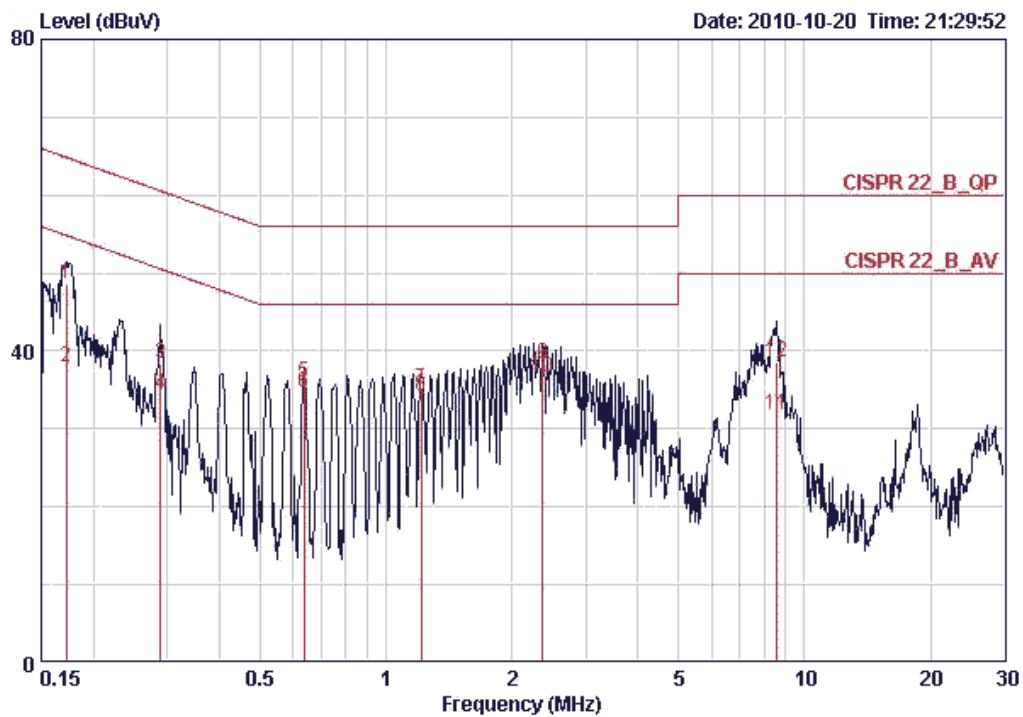

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	Limit	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17215	48.52	-16.33	64.86	48.23	0.09	0.20 QP
2	0.17215	37.92	-16.93	54.86	37.63	0.09	0.20 AVERAGE
3	0.28935	38.32	-22.22	60.54	38.05	0.07	0.20 QP
4	0.28935	34.46	-16.08	50.54	34.19	0.07	0.20 AVERAGE
5	0.63720	36.07	-19.93	56.00	35.80	0.07	0.20 QP
6	0.63720	34.70	-11.30	46.00	34.43	0.07	0.20 AVERAGE
7	1.216	35.05	-20.95	56.00	34.82	0.08	0.15 QP
8	1.216	34.26	-11.74	46.00	34.03	0.08	0.15 AVERAGE
9	2.371	38.44	-17.56	56.00	38.14	0.10	0.20 QP
10	2.371	36.57	-9.43	46.00	36.27	0.10	0.20 AVERAGE
11	8.546	31.89	-18.11	50.00	31.24	0.35	0.30 AVERAGE
12	8.546	38.64	-21.36	60.00	37.99	0.35	0.30 QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Conducted Peak Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm). The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	MA2411B

4.2.3. Test Procedures

7. The transmitter output (antenna port) was connected to the power meter.
8. Turn on the EUT and power meter and then record the peak power value.
9. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

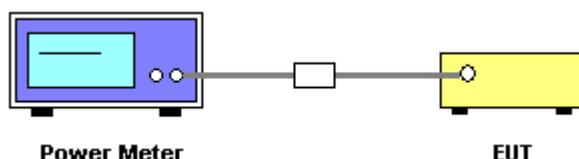

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Conducted Peak Output Power

<For Main Source – Mode 1 with Printed Antenna>:

Temperature	25°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Oct. 25, 2010		

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	9.61	21.00	Complies
39	2441 MHz	10.15	21.00	Complies
78	2480 MHz	10.33	21.00	Complies

<For Second Source – Mode 1 with Printed Antenna>:

Temperature	25°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Oct. 25, 2010		

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	6.69	21.00	Complies
39	2441 MHz	7.95	21.00	Complies
78	2480 MHz	8.51	21.00	Complies

4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

4.3.4. Test Setup Layout

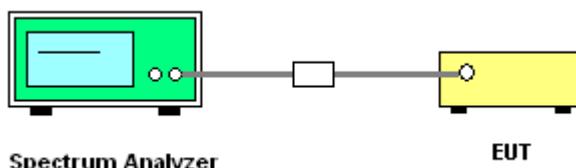

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Hopping Channel Separation

<For Main Source -Mode 1 with Printed Antenna>:

Temperature	25°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Oct. 25, 2010		

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.2920	0.861	1.1680	Complies
2441 MHz	1.00	1.3080	0.872	1.1800	Complies
2480 MHz	1.00	1.3040	0.869	1.1840	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

<For Second Source -Mode 1 with Printed Antenna>:


Temperature	25°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Oct. 25, 2010		

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.2880	0.859	1.1540	Complies
2441 MHz	1.00	1.2960	0.864	1.1680	Complies
2480 MHz	1.00	1.2920	0.861	1.1720	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth


<For Main Source – Mode 1 with Printed Antenna>:

20 dB Bandwidth Plot on Channel 0 / 2402 MHz

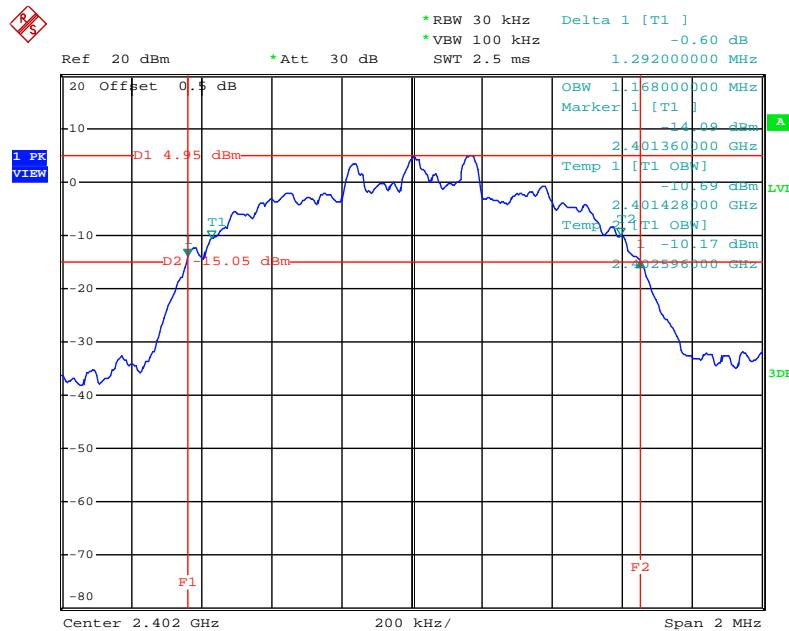


Date: 26.OCT.2010 14:06:25

20 dB Bandwidth Plot on Channel 39 / 2441 MHz

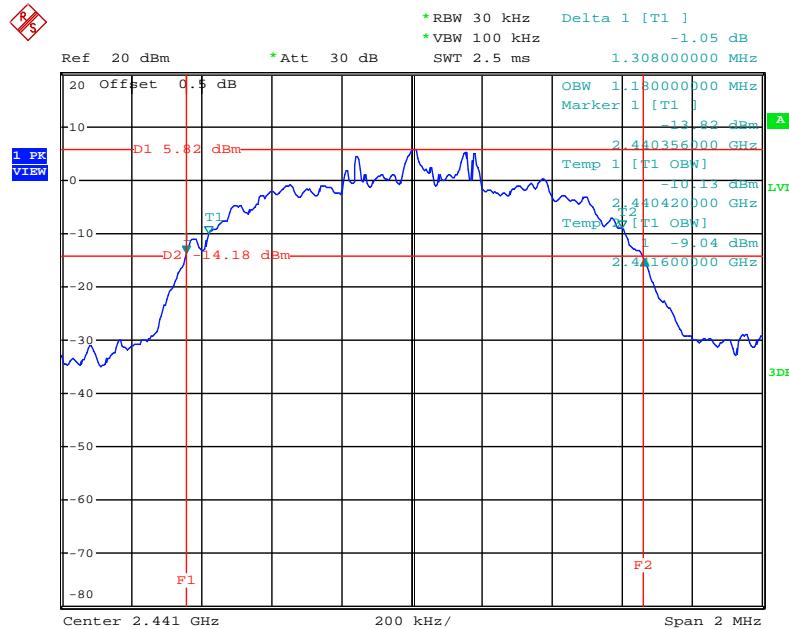


Date: 26.OCT.2010 14:04:02

20 dB Bandwidth Plot on Channel 78 / 2480 MHz

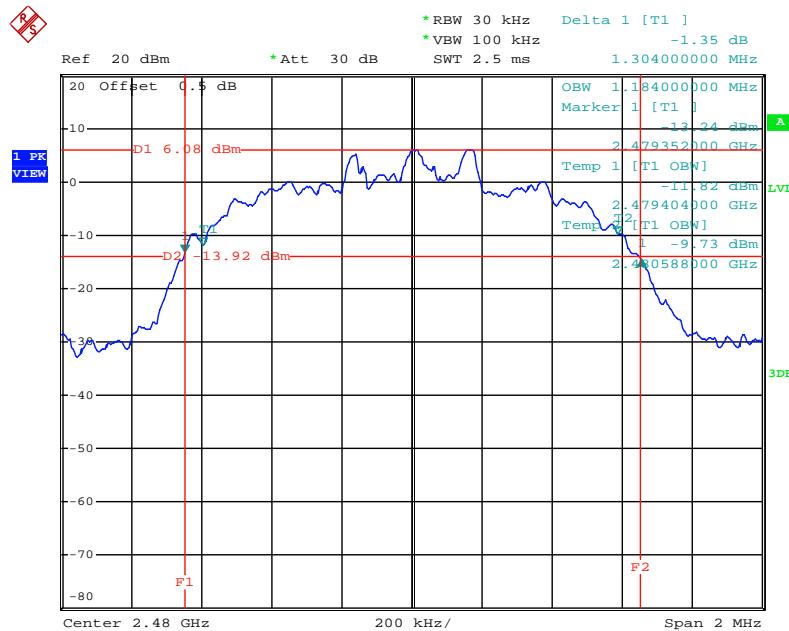


Date: 26.OCT.2010 14:02:11

Channel Separation Plot on Channel 0~1 / 2402 MHz~ 2403 MHz

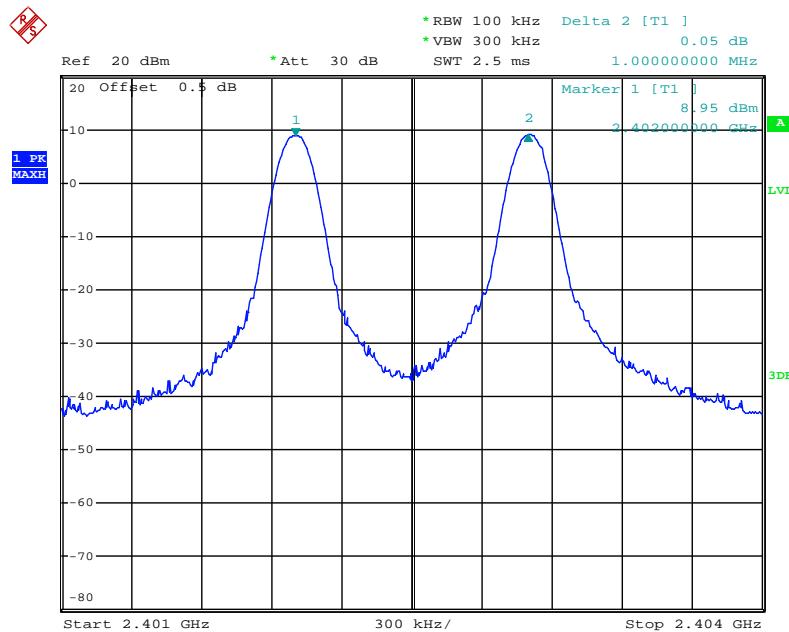


Date: 26.OCT.2010 14:43:25

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

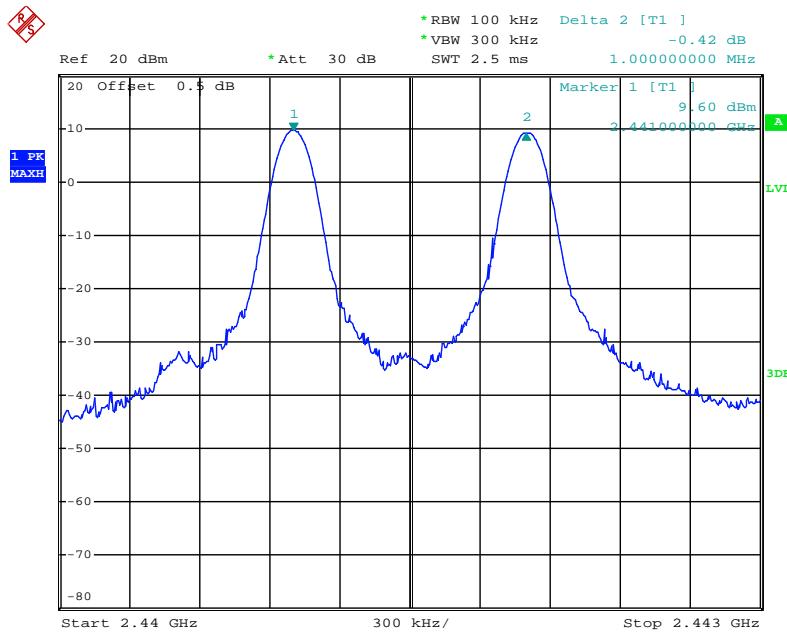

Date: 26.OCT.2010 14:44:39


Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

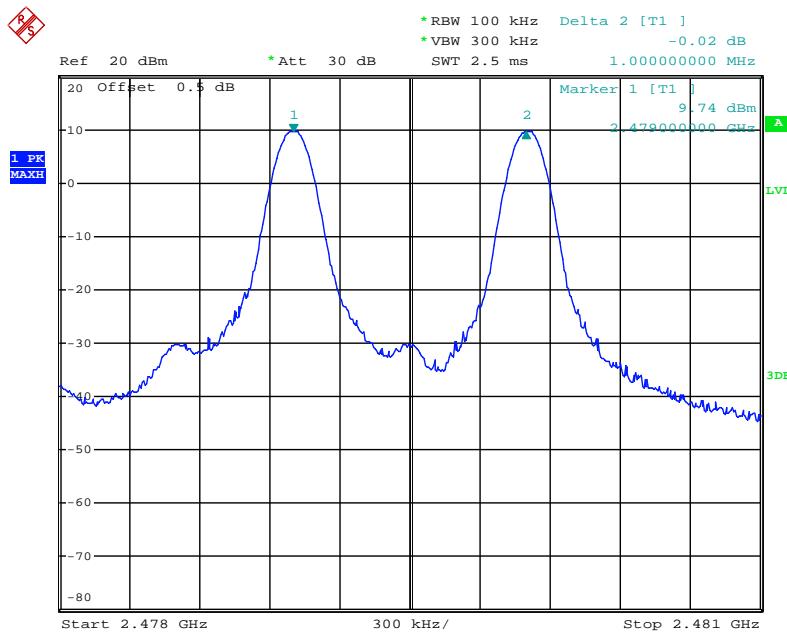

Date: 26.OCT.2010 14:47:33


<For Second Source – Mode 1 with Printed Antenna>:

20 dB Bandwidth Plot on Channel 0 / 2402 MHz

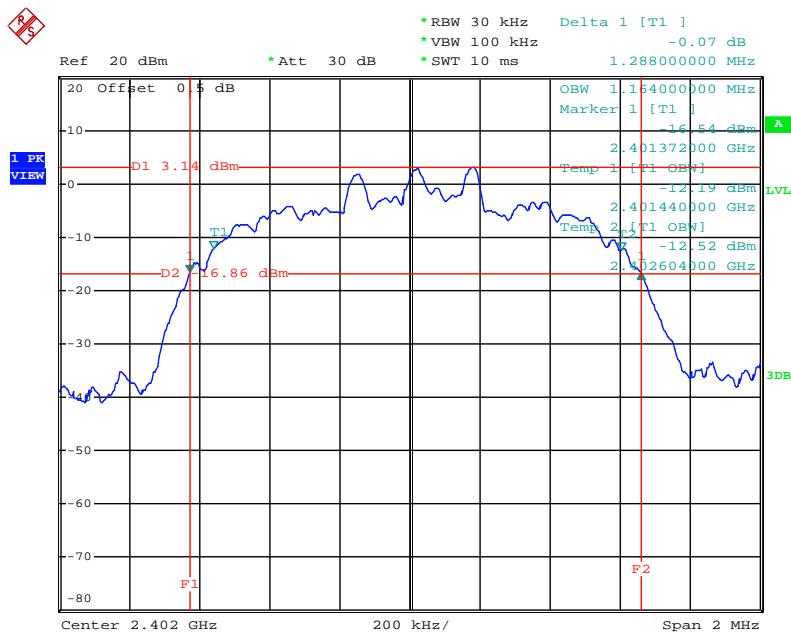


Date: 26.OCT.2010 16:22:34

20 dB Bandwidth Plot on Channel 39 / 2441 MHz

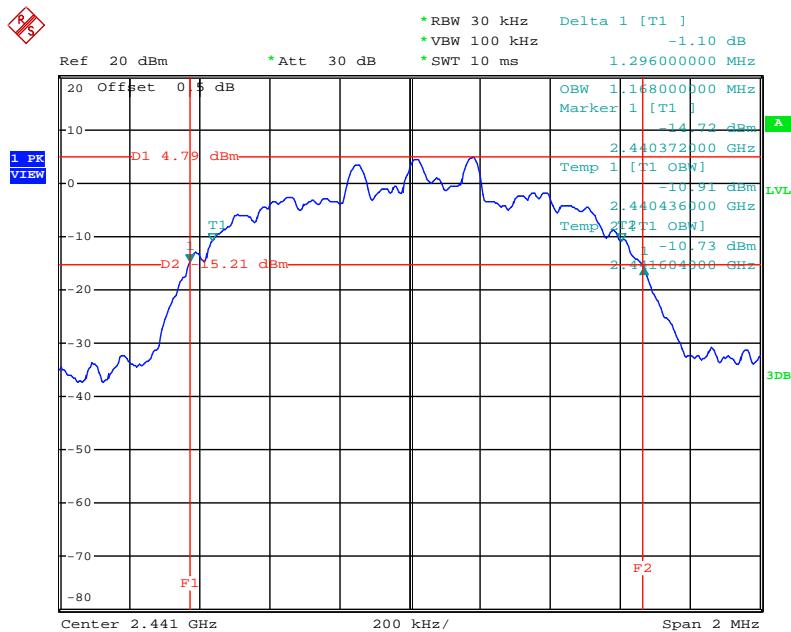


Date: 26.OCT.2010 16:25:41

20 dB Bandwidth Plot on Channel 78 / 2480 MHz

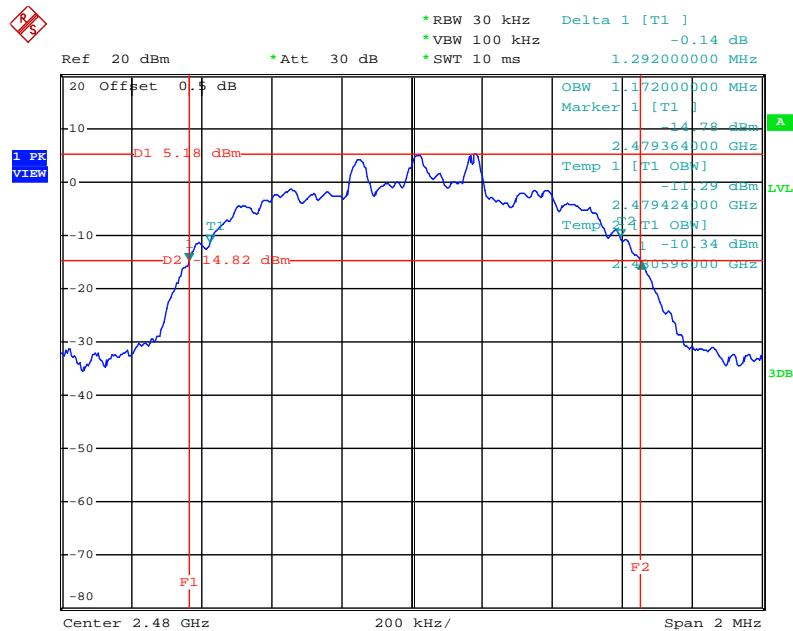


Date: 26.OCT.2010 16:27:35

Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz

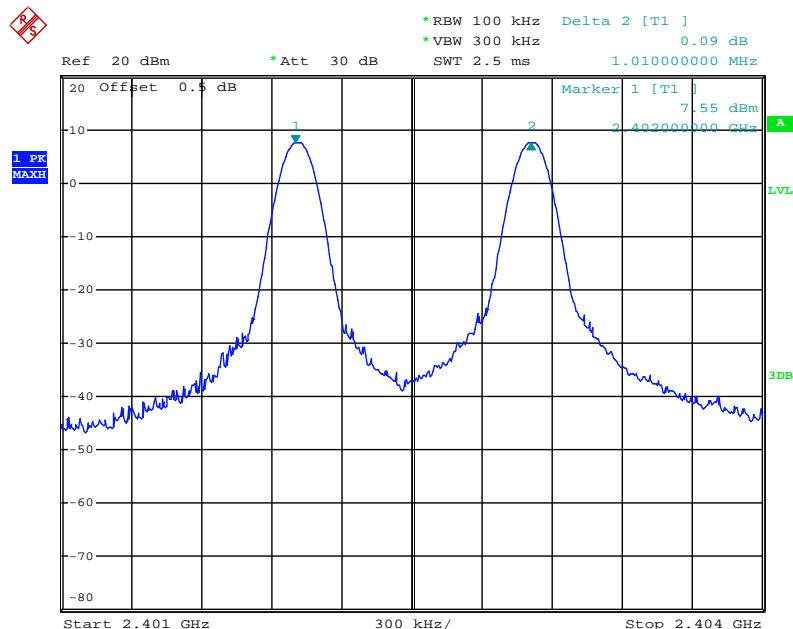


Date: 26.OCT.2010 16:48:53

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

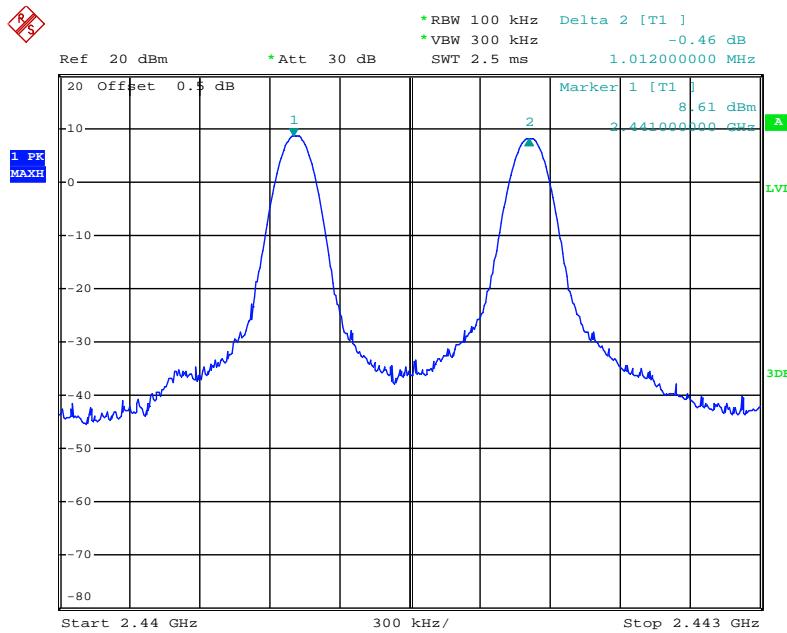

Date: 26.OCT.2010 16:50:03

Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

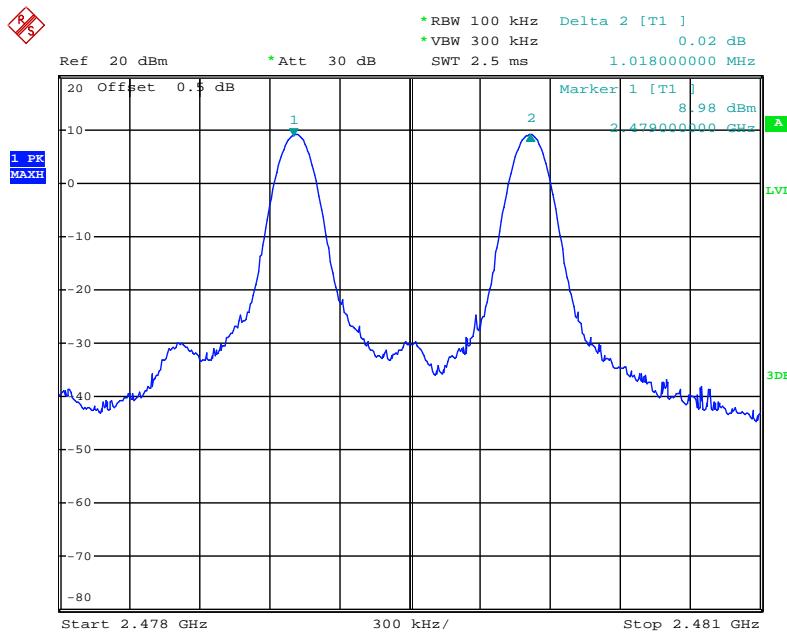

Date: 26.OCT.2010 16:51:49

4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.4.4. Test Setup Layout

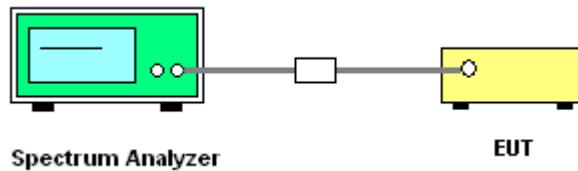

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Number of Hopping Frequency

<For Main Source – Mode 1 with Printed Antenna>:

Temperature	25°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Oct. 25, 2010		

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
8DPSK	0 ~ 78	2402 ~ 2480	79	75	Complies


<For Second Source – Mode 1 with Printed Antenna>:

Temperature	25°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	8DPSK
Test Date	Oct. 25, 2010		

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
8DPSK	0 ~ 78	2402 ~ 2480	79	75	Complies

<For Main Source – Mode 1 with Printed Antenna>:


Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

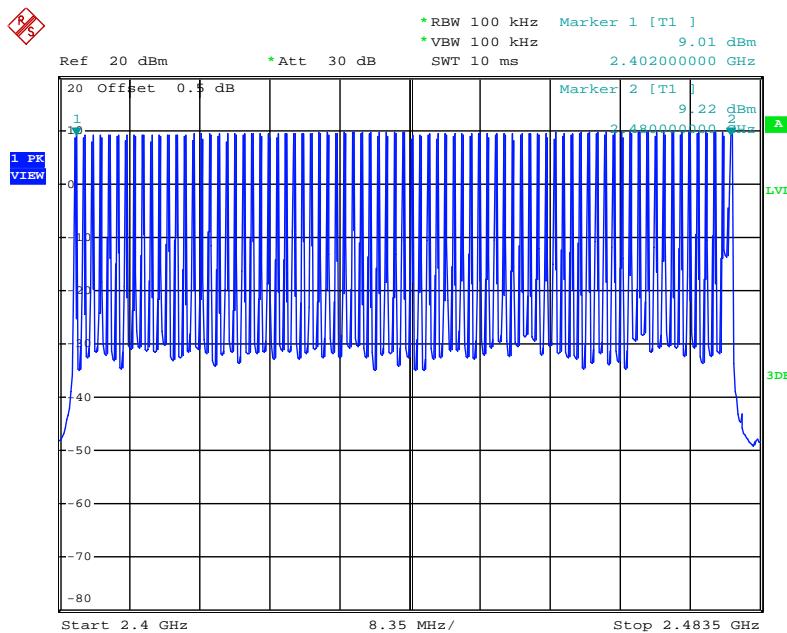

Date: 26.OCT.2010 15:27:36

<For Second Source – Mode 1 with Printed Antenna>:

Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

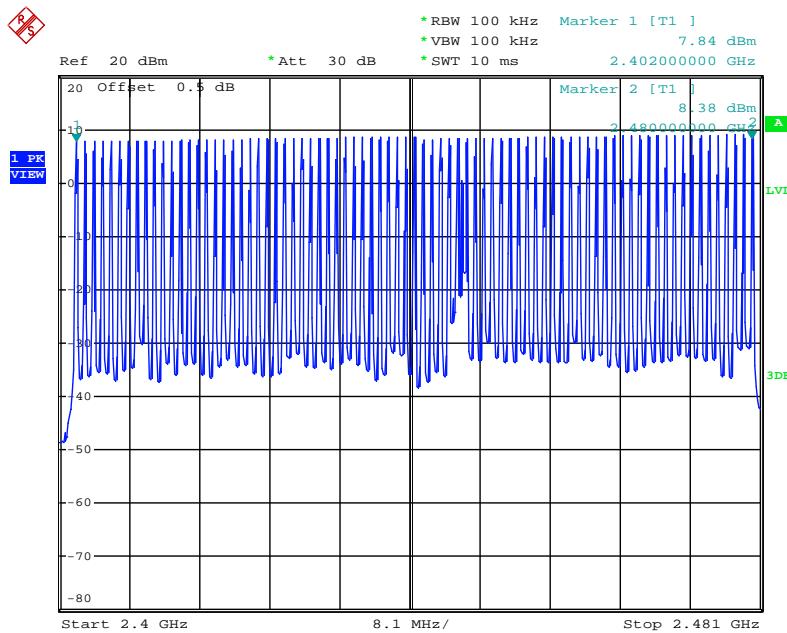

Date: 26.OCT.2010 17:32:52

4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Single Trigger

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for 3DH5, 3DH3 and 3DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.
9. 3DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
10. 3DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
11. 3DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

4.5.4. Test Setup Layout

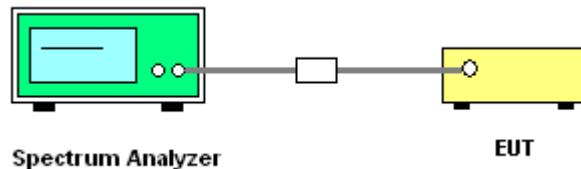

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Dwell Time

<For Main Source – Mode 1 with Printed Antenna>:

Temperature	25°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	3DH1, 3DH3, 3DH5
Test Date	Oct. 25, 2010		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH5	2402 MHz	2.9100	0.3104	0.4000	Complies
3DH3	2402 MHz	1.6600	0.2656	0.4000	Complies
3DH1	2402 MHz	0.4000	0.1280	0.4000	Complies
3DH5	2441 MHz	2.9100	0.3104	0.4000	Complies
3DH3	2441 MHz	1.6600	0.2656	0.4000	Complies
3DH1	2441 MHz	0.3900	0.1248	0.4000	Complies
3DH5	2480 MHz	2.9100	0.3104	0.4000	Complies
3DH3	2480 MHz	1.6500	0.2640	0.4000	Complies
3DH1	2480 MHz	0.4000	0.1280	0.4000	Complies


<For Second Source – EUT 2 (Mode 1 with Printed Antenna)>:

Temperature	25°C	Humidity	60%
Test Engineer	Sean Ku	Configurations	3DH1, 3DH3, 3DH5
Test Date	Oct. 25, 2010		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH5	2402 MHz	2.9100	0.3104	0.4000	Complies
3DH3	2402 MHz	1.6600	0.2656	0.4000	Complies
3DH1	2402 MHz	0.3950	0.1264	0.4000	Complies
3DH5	2441 MHz	2.9100	0.3104	0.4000	Complies
3DH3	2441 MHz	1.6500	0.2640	0.4000	Complies
3DH1	2441 MHz	0.4000	0.1280	0.4000	Complies
3DH5	2480 MHz	2.9000	0.3093	0.4000	Complies
3DH3	2480 MHz	1.6500	0.2640	0.4000	Complies
3DH1	2480 MHz	0.4000	0.1280	0.4000	Complies


<For Main Source – Mode 1 with Printed Antenna>:

3DH5 Dwell Time Plot on Channel 0 / 2402 MHz

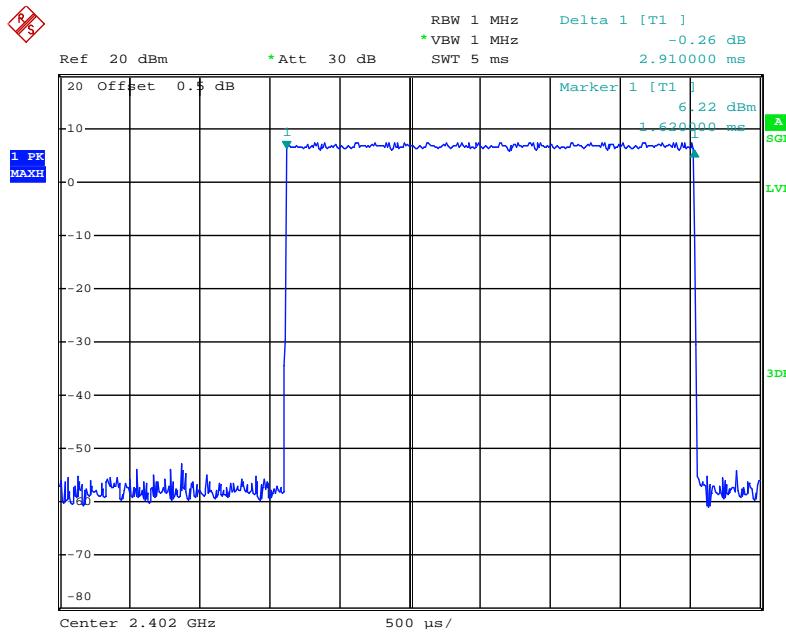


Date: 26.OCT.2010 14:24:10

3DH3 Dwell Time Plot on Channel 0 / 2402 MHz

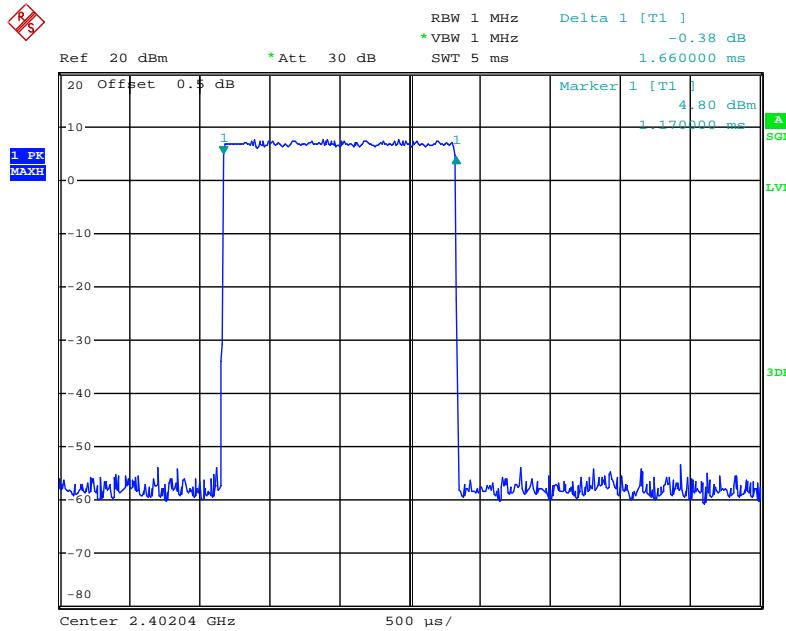


Date: 26.OCT.2010 14:30:54

3DH1 Dwell Time Plot on Channel 0 / 2402 MHz

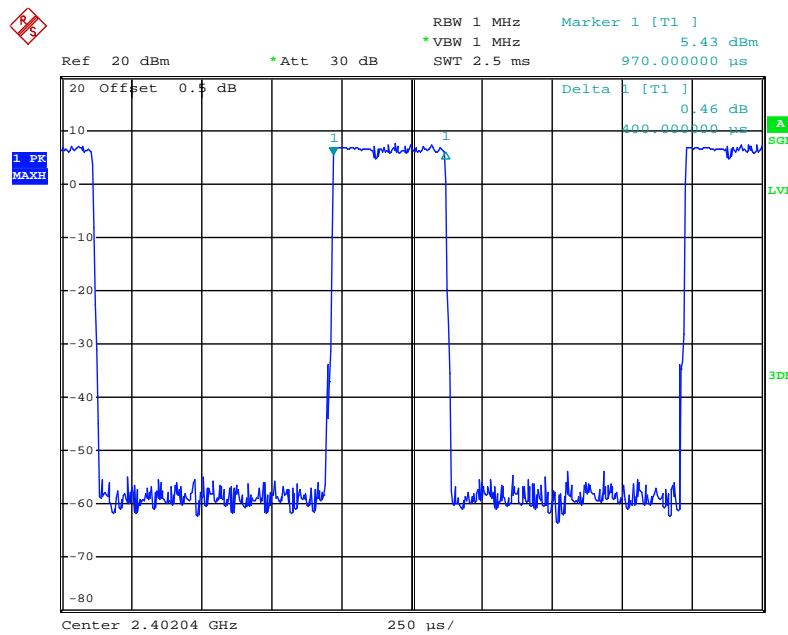


Date: 26.OCT.2010 14:34:41

3DH5 Dwell Time Plot on Channel 39 / 2441 MHz

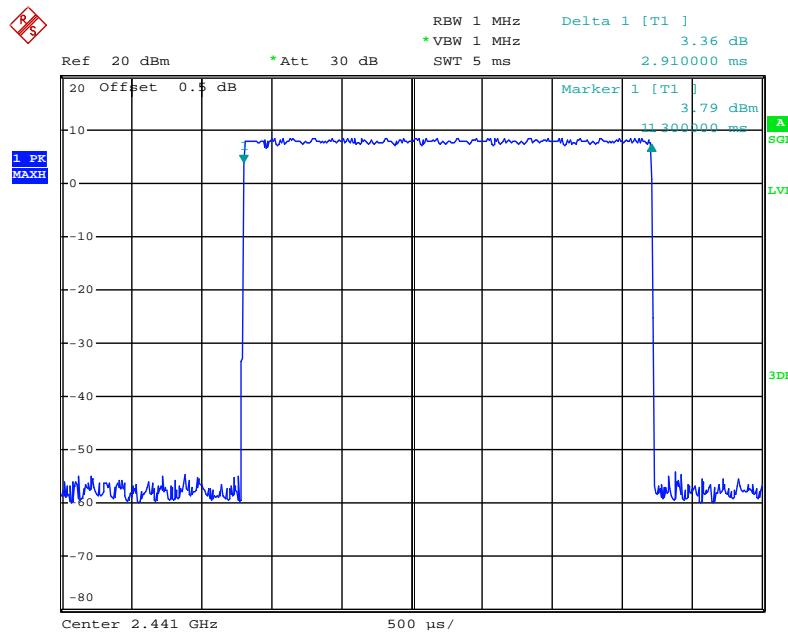


Date: 26.OCT.2010 14:25:22

3DH3 Dwell Time Plot on Channel 39 / 2441 MHz

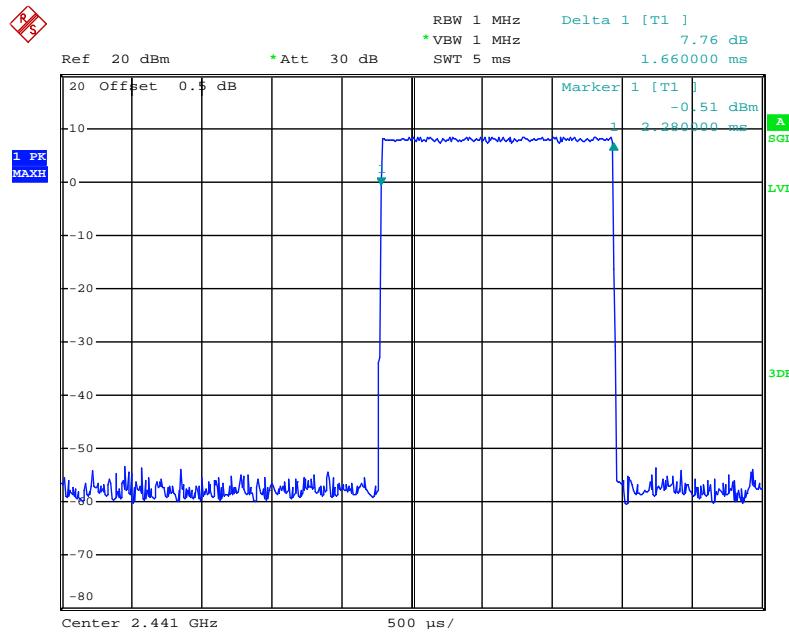


Date: 26.OCT.2010 14:29:41

3DH1 Dwell Time Plot on Channel 39 / 2441 MHz

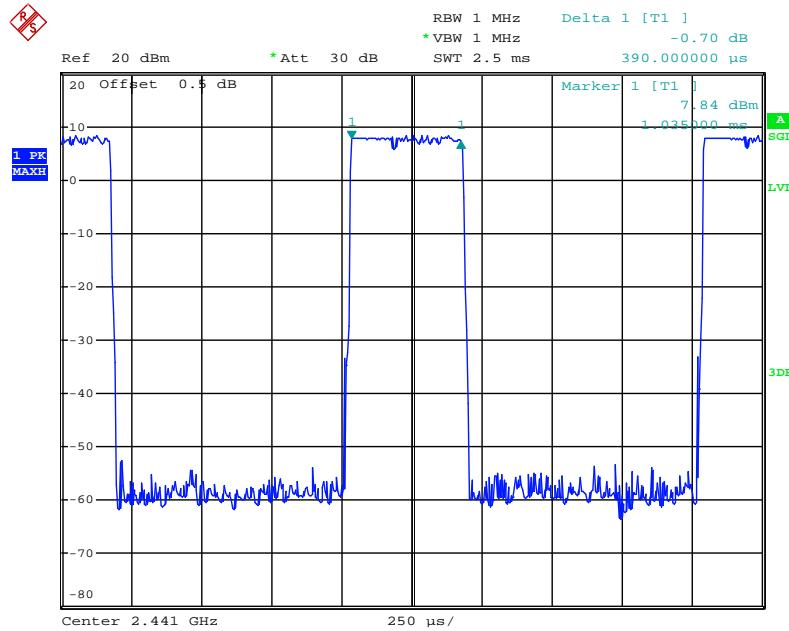


Date: 26.OCT.2010 14:36:02

3DH5 Dwell Time Plot on Channel 78 / 2480 MHz

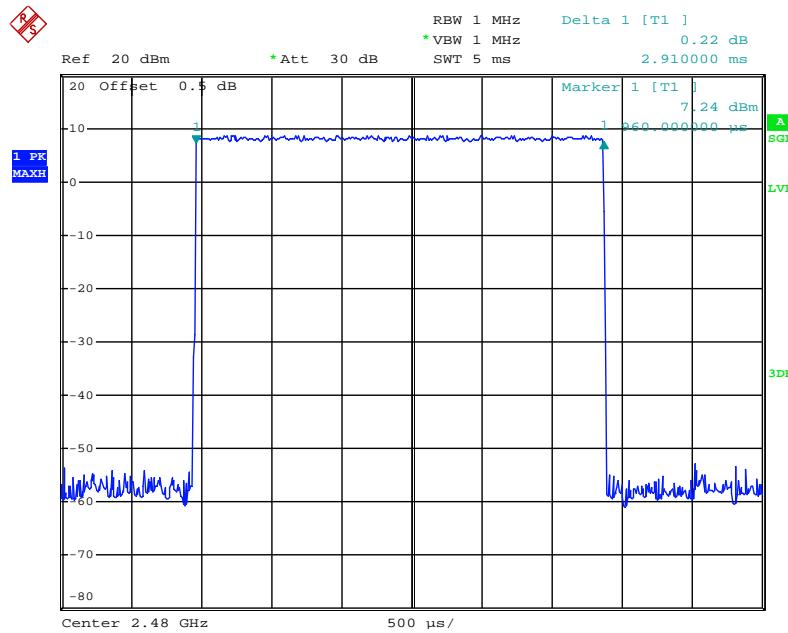


Date: 26.OCT.2010 14:26:21

3DH3 Dwell Time Plot on Channel 78 / 2480 MHz

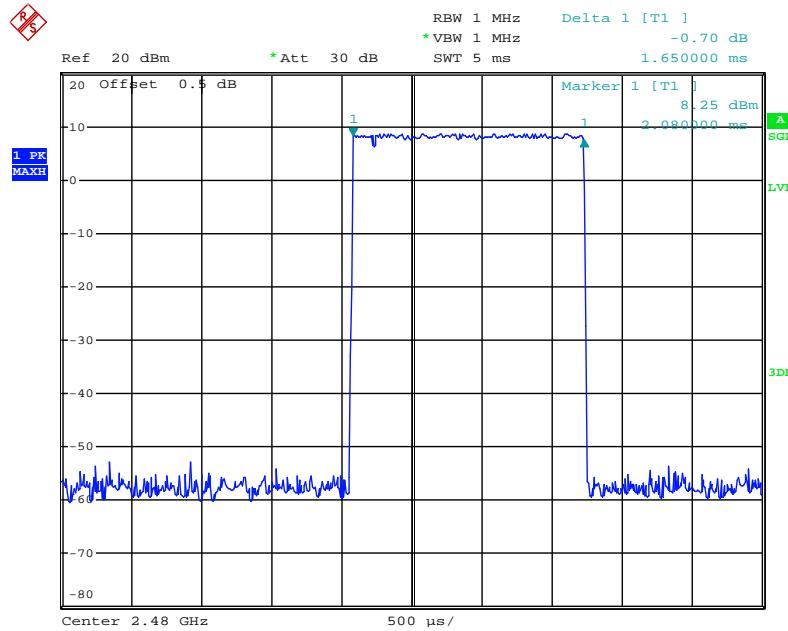

Date: 26.OCT.2010 14:28:04


3DH1 Dwell Time Plot on Channel 78 / 2480 MHz

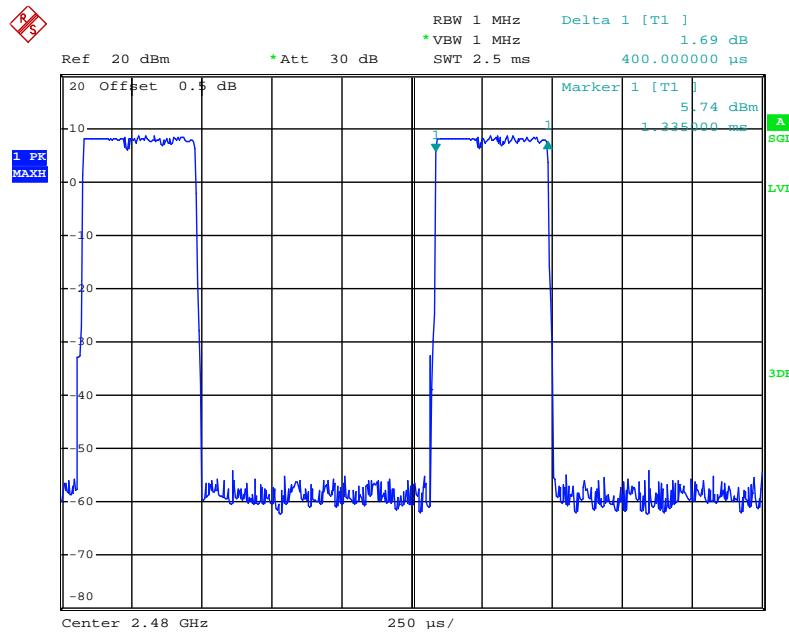

Date: 26.OCT.2010 14:37:32


<For Second Source – Mode 1 with Printed Antenna>:

3DH5 Dwell Time Plot on Channel 0 / 2402 MHz

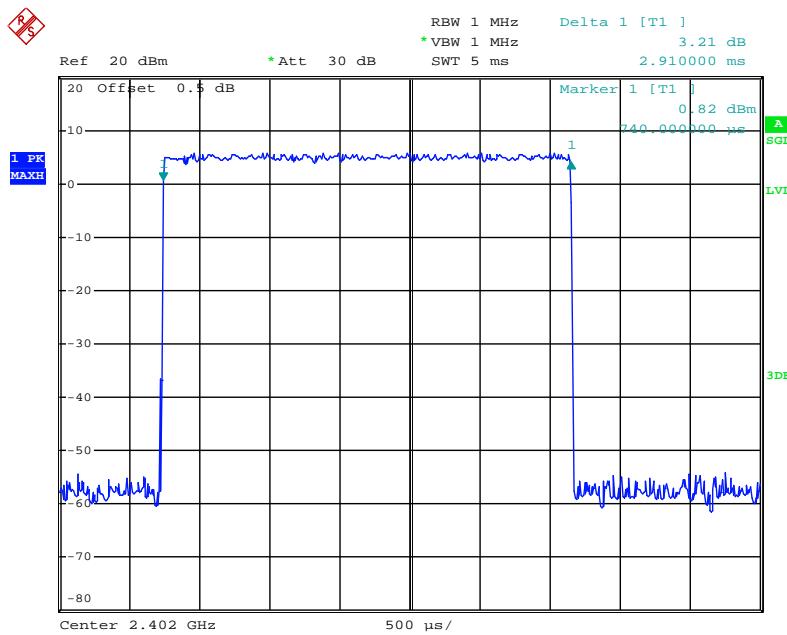


Date: 26.OCT.2010 16:32:49

3DH3 Dwell Time Plot on Channel 0 / 2402 MHz

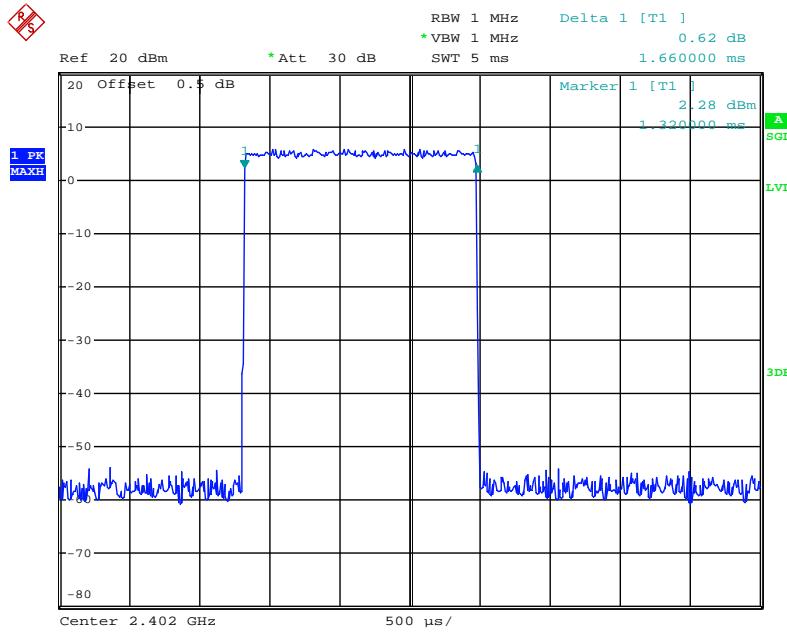


Date: 26.OCT.2010 16:38:40

3DH1 Dwell Time Plot on Channel 0 / 2402 MHz

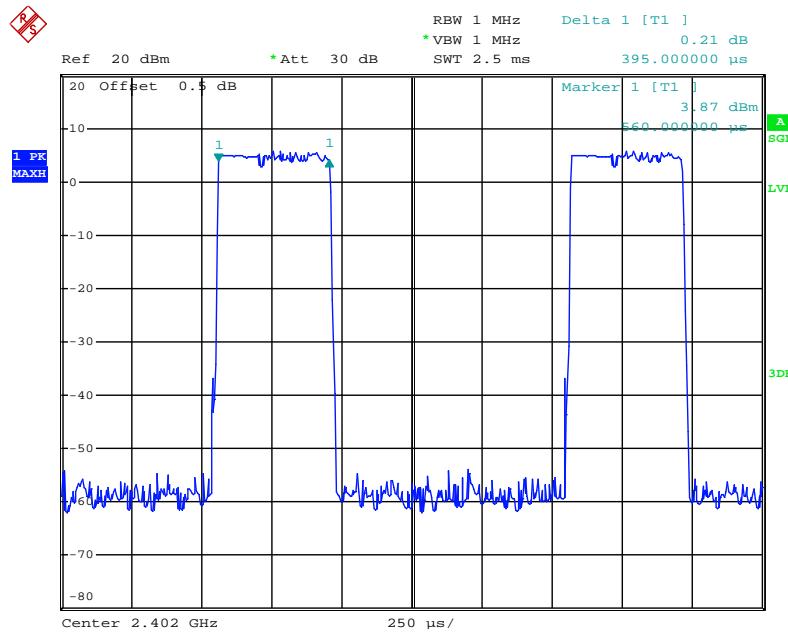


Date: 26.OCT.2010 16:45:21

3DH5 Dwell Time Plot on Channel 39 / 2441 MHz

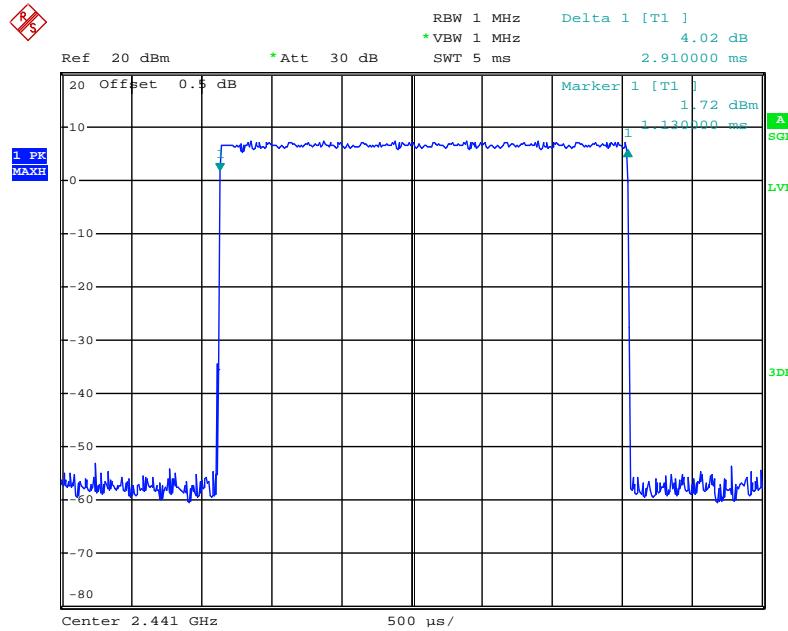


Date: 26.OCT.2010 16:31:58

3DH3 Dwell Time Plot on Channel 39 / 2441 MHz

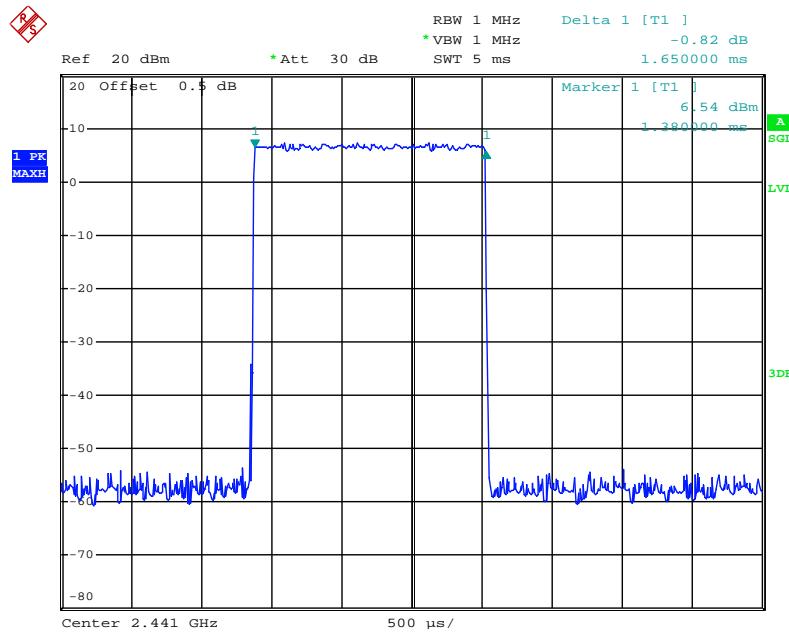


Date: 26.OCT.2010 16:39:59

3DH1 Dwell Time Plot on Channel 39 / 2441 MHz

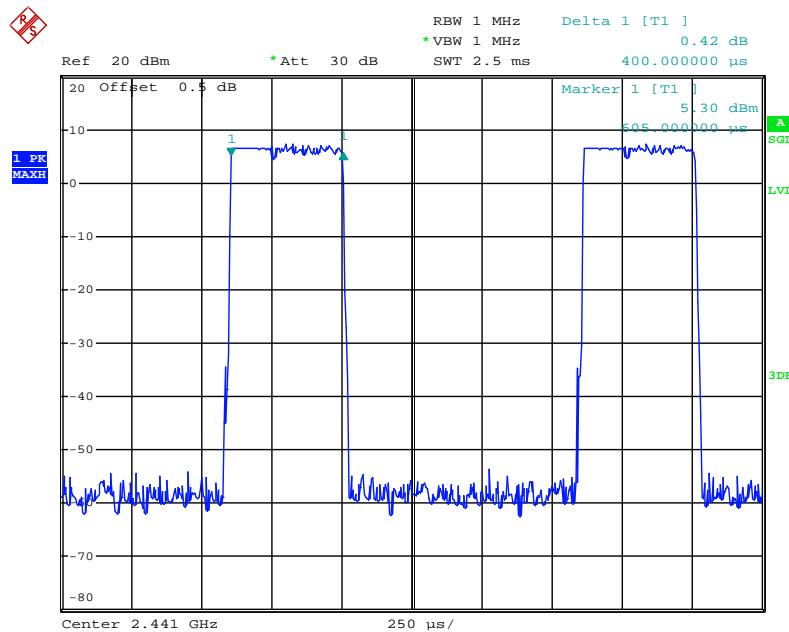


Date: 26.OCT.2010 16:44:30

3DH5 Dwell Time Plot on Channel 78 / 2480 MHz

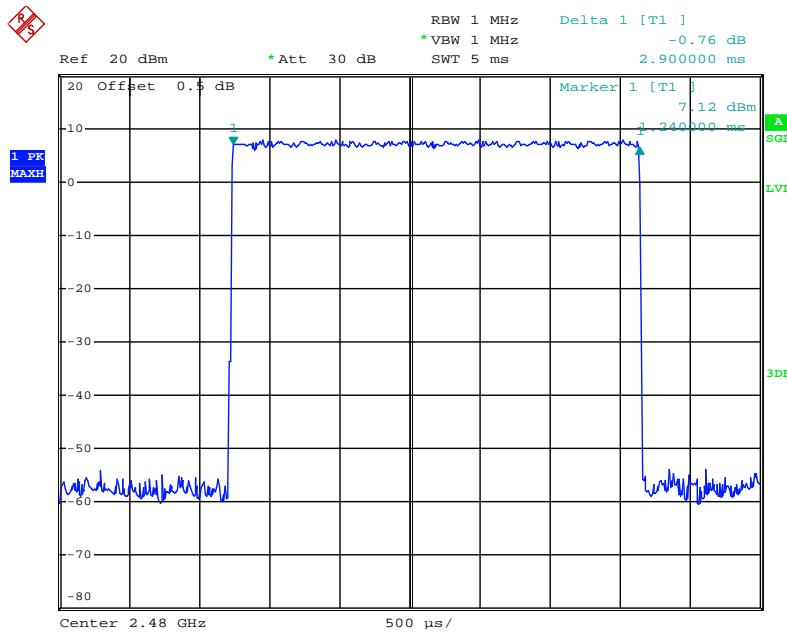


Date: 26.OCT.2010 16:29:12

3DH3 Dwell Time Plot on Channel 78 / 2480 MHz

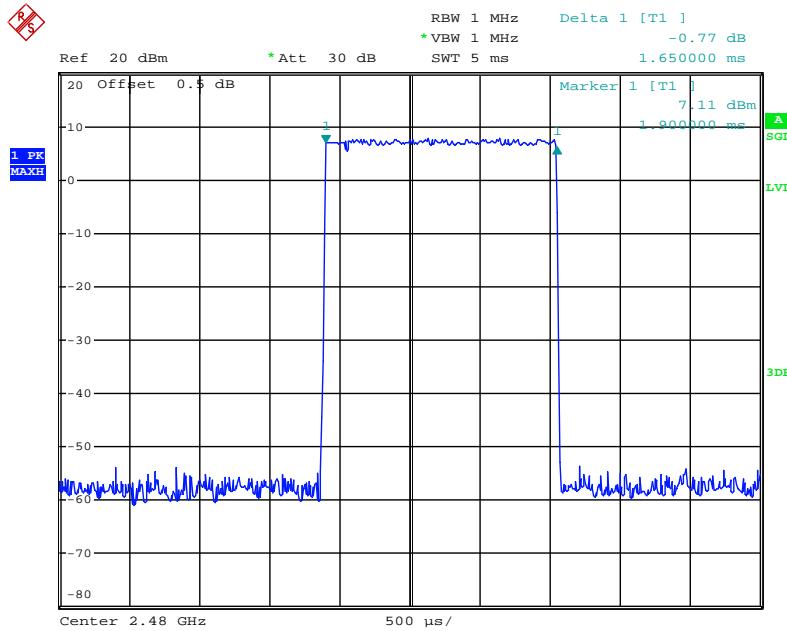

Date: 26.OCT.2010 16:40:59

3DH1 Dwell Time Plot on Channel 78 / 2480 MHz

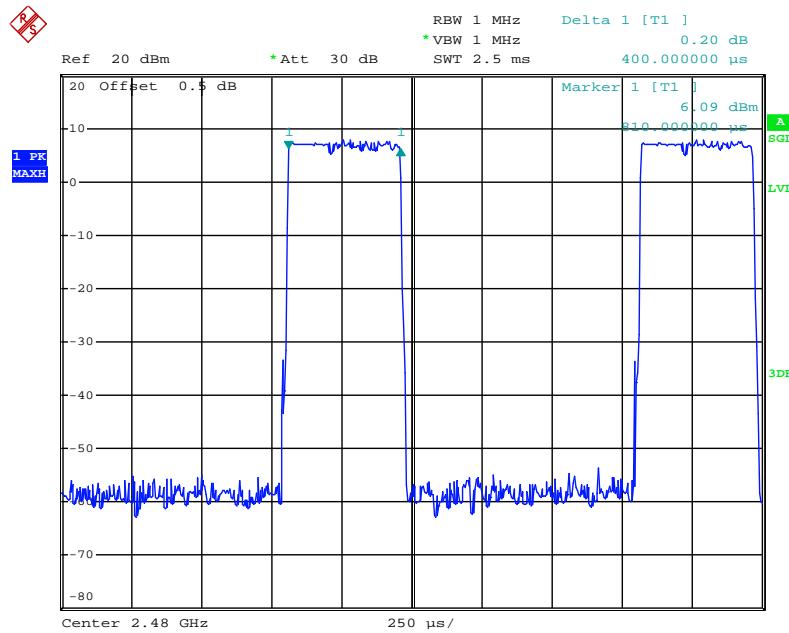

Date: 26.OCT.2010 16:42:46

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

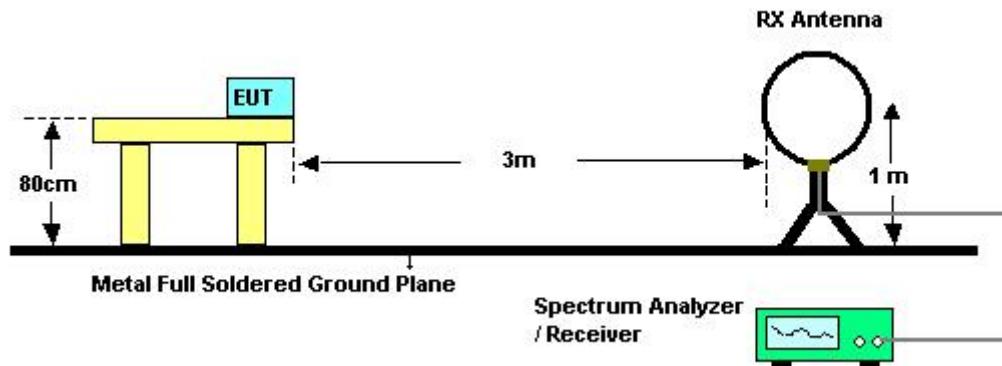

For radiated emissions above 30MHz

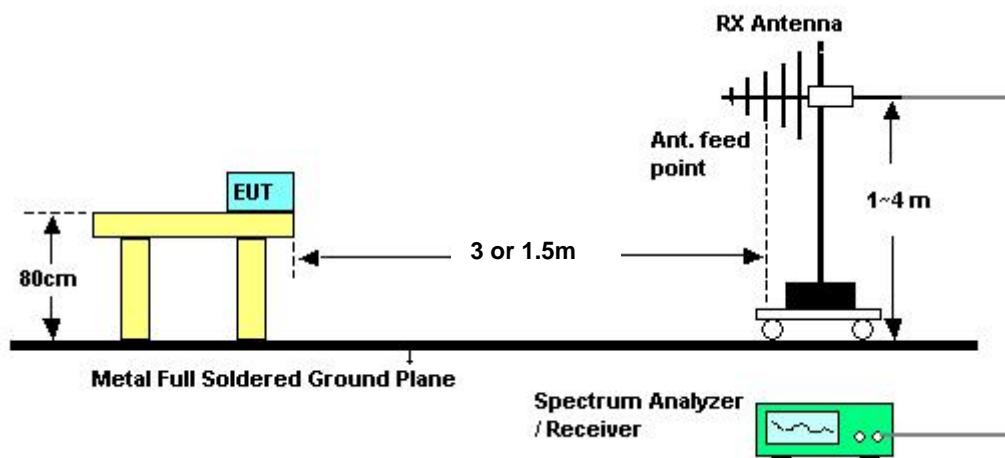

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang		
Evaluating Date	Oct. 30, 2010		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


<For Main Source – Mode 1>:

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	Normal Link

Horizontal

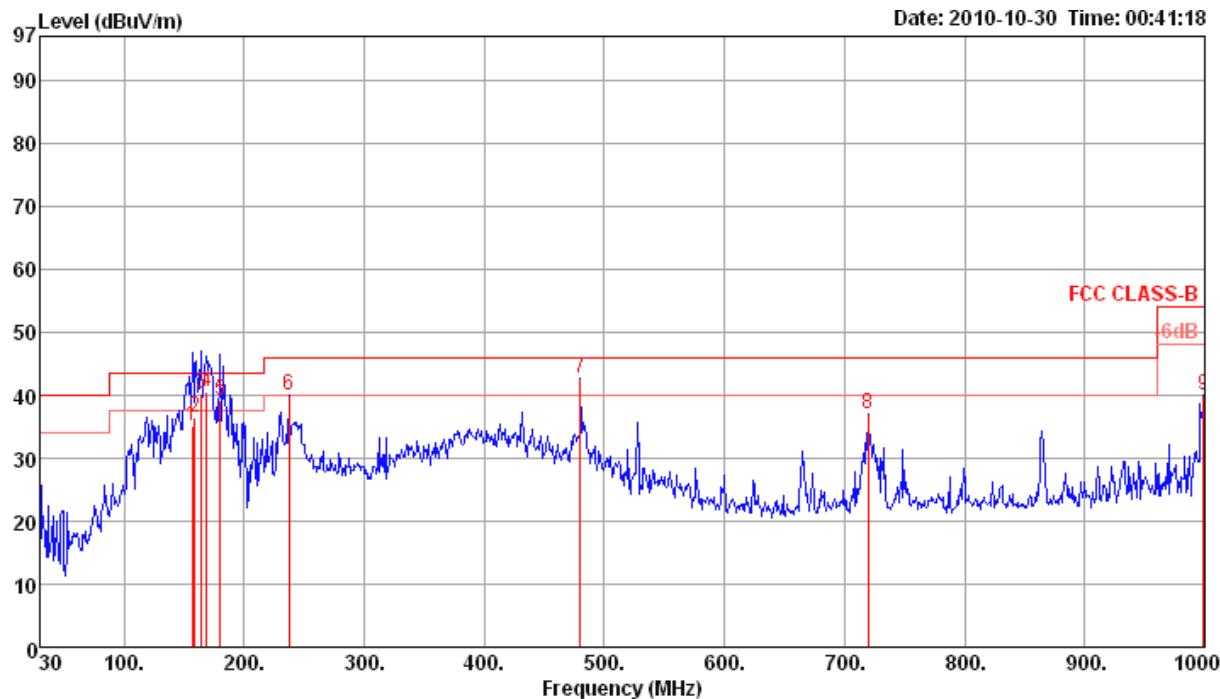

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
1	157.12	35.07	43.50	-8.43	48.91	1.49	27.31	11.98	322	172 QP	HORIZONTAL
2	159.12	36.54	43.50	-6.96	50.34	1.50	27.31	12.01	319	169 QP	HORIZONTAL
3	164.41	40.19	43.50	-3.31	53.56	1.52	27.28	12.39	201	179 QP	HORIZONTAL
4	168.71	40.47	43.50	-3.03	53.50	1.54	27.25	12.68	202	174 QP	HORIZONTAL
5	180.00	39.04	43.50	-4.46	51.50	1.60	27.20	13.14	209	185 QP	HORIZONTAL
6	237.58	39.93	46.00	-6.07	53.26	1.85	27.02	11.84	0	100 Peak	HORIZONTAL
7	480.08	42.79	46.00	-3.21	50.82	2.66	28.00	17.31	0	100 Peak	HORIZONTAL
8	719.67	37.08	46.00	-8.92	42.40	3.38	27.92	19.22	0	100 Peak	HORIZONTAL
9	999.03	40.06	54.00	-13.94	42.09	3.70	27.01	21.28	0	100 Peak	HORIZONTAL

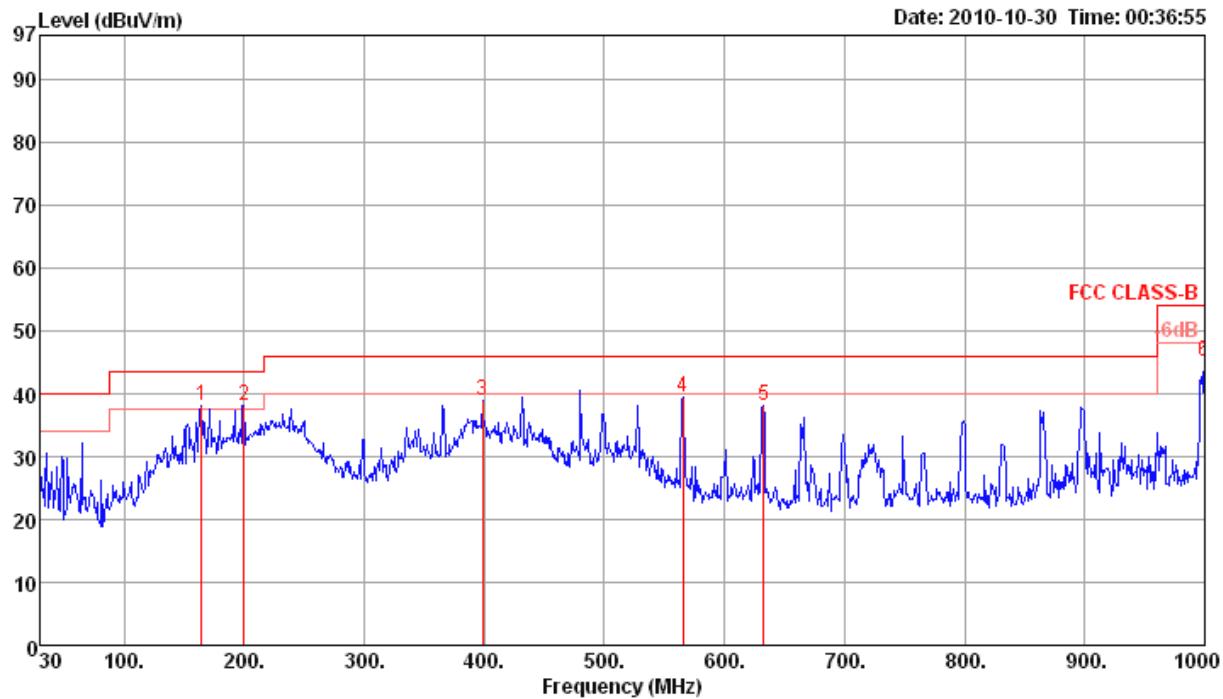Vertical


Freq MHz	Level dBuV/m	Limit Line dB	Over Limit dB	Read Level dBuV	Cable Loss dB	Preamp Factor dB	Antenna Factor dB/m	T/Pos deg	A/Pos cm	Remark	Pol/Phase
1 p 164.83	38.15	43.50	-5.35	51.51	1.52	27.27	12.39	0	400	Peak	VERTICAL
2 l 199.75	38.02	43.50	-5.48	54.37	1.70	27.10	9.05	0	400	Peak	VERTICAL
3 398.60	38.81	46.00	-7.19	48.07	2.30	27.59	16.03	0	400	Peak	VERTICAL
4 565.44	39.42	46.00	-6.58	46.32	2.83	28.10	18.37	0	400	Peak	VERTICAL
5 632.37	38.18	46.00	-7.82	44.29	3.09	28.07	18.87	0	400	Peak	VERTICAL
6 1000.00	45.04	54.00	-8.96	47.05	3.70	27.00	21.29	0	400	Peak	VERTICAL


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Main Source – Mode 2>:

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	Normal Link

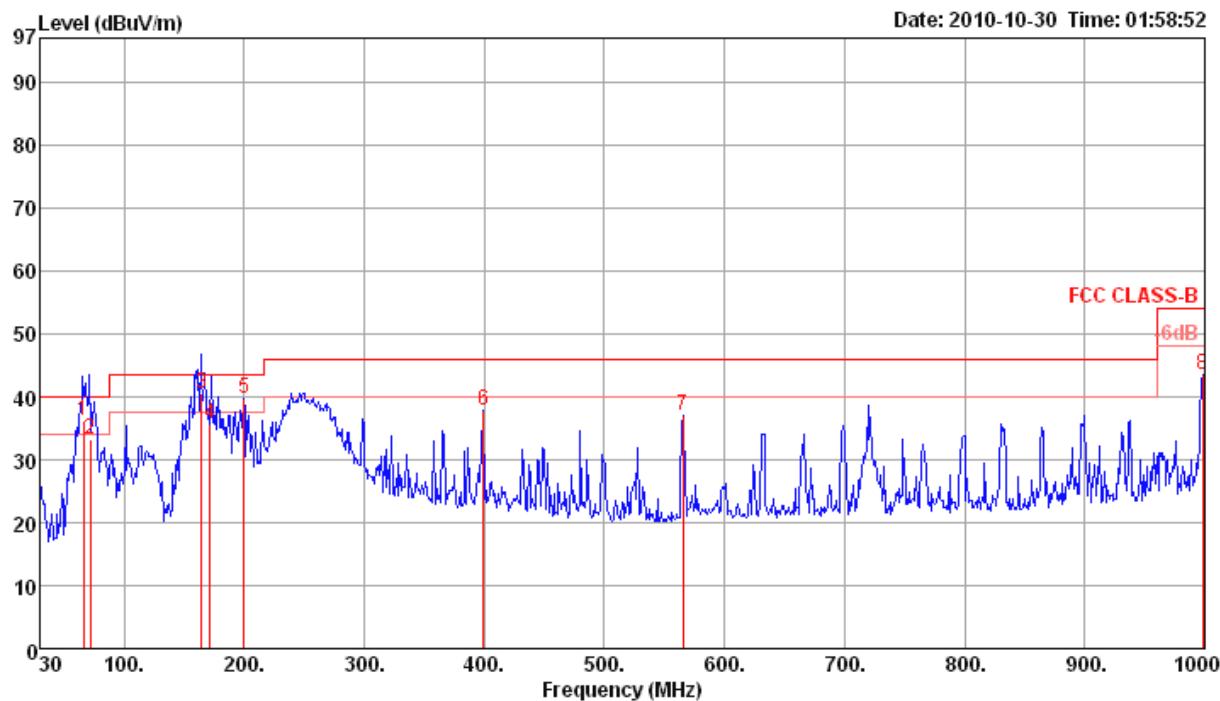Horizontal


Freq	Level	Line	Limit	Level	Table		T/Pos	A/Pos	Remark	Pol/Phase
					Preamp	Antenna				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1 !	66.46	36.17	40.00	-3.83	56.36	0.86	27.73	6.68	193	274 QP
2	72.00	33.26	40.00	-6.74	53.39	0.84	27.71	6.74	193	274 QP
3 q	164.40	40.55	43.50	-2.95	53.99	1.52	27.28	12.32	202	178 QP
4	172.00	35.57	43.50	-7.93	48.27	1.56	27.23	12.97	202	174 QP
5 p	199.75	39.66	43.50	-3.84	56.01	1.70	27.10	9.05	0	100 Peak
6	399.57	37.93	46.00	-8.07	47.17	2.30	27.60	16.06	0	100 Peak
7	565.44	36.94	46.00	-9.06	43.84	2.83	28.10	18.37	0	100 Peak
8	998.06	43.63	54.00	-10.37	45.66	3.70	27.01	21.28	0	100 Peak

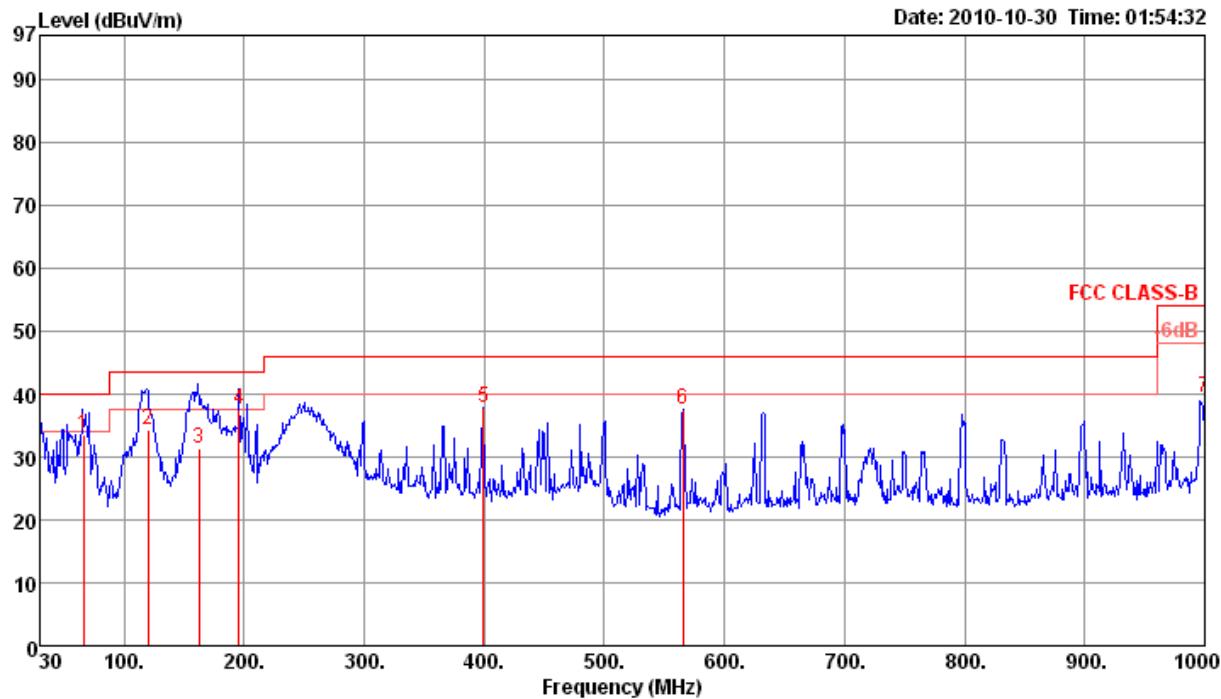Vertical


Freq MHz	Level dBuV/m	Limit Line	Over Limit	Read Level dB	Cable			Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
					Loss	dB	dB/m						
1 66.46	33.39	40.00	-6.61	53.56	0.88	27.74	6.69	193	274	QP			VERTICAL
2 120.00	34.37	43.50	-9.13	48.21	1.20	27.50	12.46	201	169	QP			VERTICAL
3 162.33	31.41	43.50	-12.09	45.01	1.51	27.29	12.18	203	174	QP			VERTICAL
4 q 196.01	37.54	43.50	-5.96	53.11	1.68	27.12	9.87	203	175	QP			VERTICAL
5 p 399.57	37.72	46.00	-8.28	46.96	2.30	27.60	16.06	0	400	Peak			VERTICAL
6 565.44	37.44	46.00	-8.56	44.34	2.83	28.10	18.37	0	400	Peak			VERTICAL
7 1000.00	39.34	54.00	-14.66	41.35	3.70	27.00	21.29	0	400	Peak			VERTICAL


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Second Source – Mode 1>:

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	Normal Link

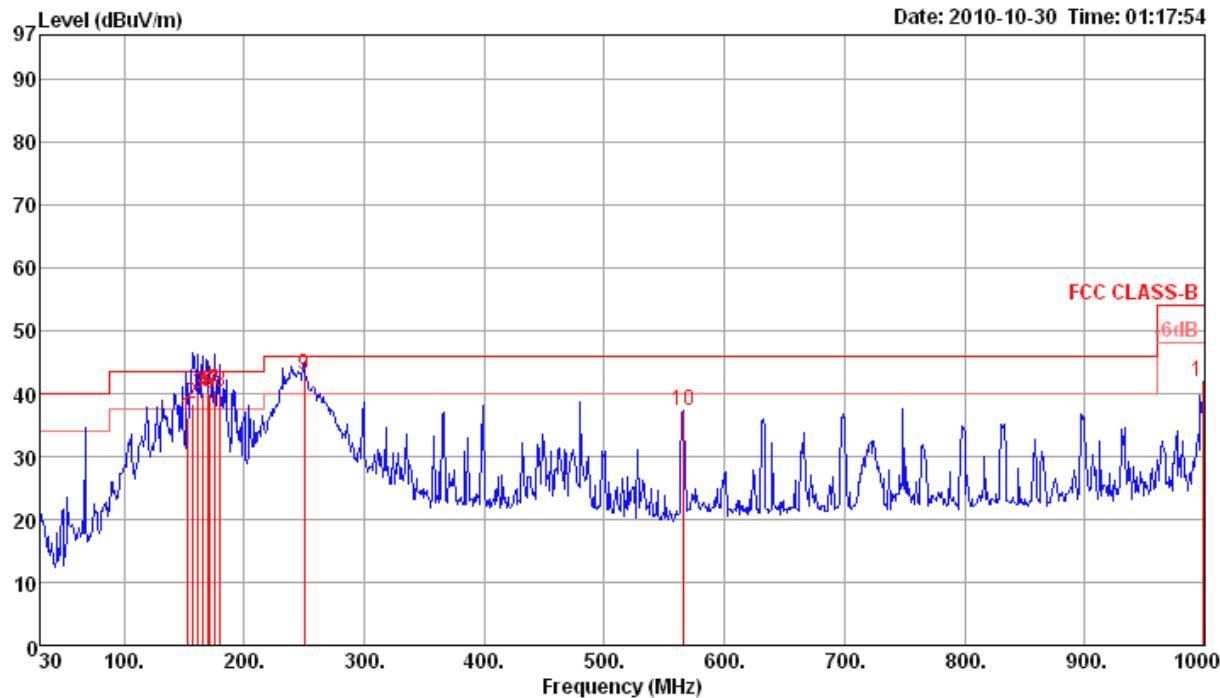Horizontal


Freq	Level	Limit	Over	Read	Cable			T/Pos	A/Pos	Remark	Pol/Phase	
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB	dB/m	deg	cm		
1	152.50	36.21	43.50	-7.29	50.20	1.46	27.34	11.89	206	172	QP	HORIZONTAL
2	157.25	38.25	43.50	-5.25	52.09	1.49	27.31	11.98	212	168	QP	HORIZONTAL
3	162.00	39.89	43.50	-3.61	53.49	1.51	27.29	12.18	304	165	QP	HORIZONTAL
4	166.00	40.32	43.50	-3.18	53.59	1.53	27.27	12.47	342	165	QP	HORIZONTAL
5	169.50	40.15	43.50	-3.35	53.09	1.55	27.25	12.76	326	167	QP	HORIZONTAL
6	172.00	40.02	43.50	-3.48	52.80	1.56	27.24	12.90	305	182	QP	HORIZONTAL
7	175.50	40.48	43.50	-3.02	53.00	1.58	27.22	13.12	348	157	Peak	HORIZONTAL
8	180.00	40.33	43.50	-3.17	52.79	1.60	27.20	13.14	331	164	QP	HORIZONTAL
9	250.00	42.97	46.00	-3.03	55.30	1.90	27.00	12.77	304	173	QP	HORIZONTAL
10	565.44	37.39	46.00	-8.61	44.29	2.83	28.10	18.37	0	400	Peak	HORIZONTAL
11	990.03	41.91	54.00	-12.09	43.94	3.70	27.01	21.28	0	400	Peak	HORIZONTAL

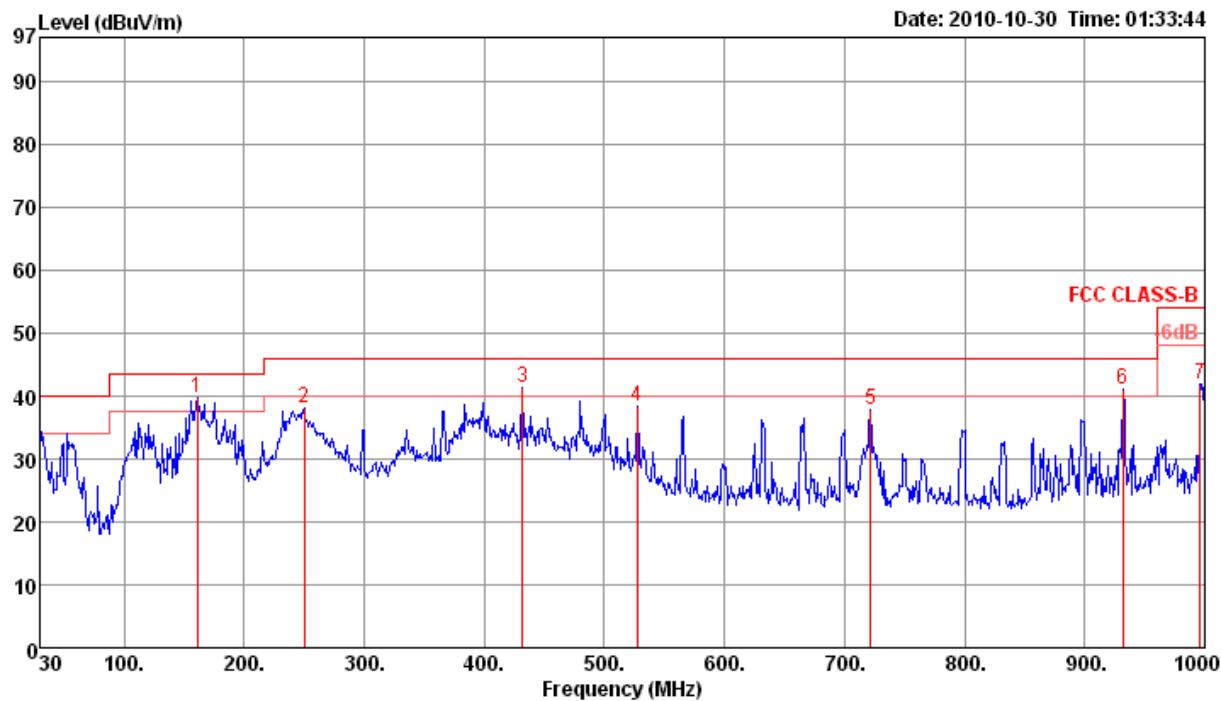Vertical


Freq MHz	Level dBuV/m	Limit Line	Over Limit	Read Level dB	Cable			Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
					Loss	Factor	dB/m						
1 p 160.95	39.85	43.50	-3.65	53.54	1.50	27.29	12.10	0	400	Peak			VERTICAL
2 250.19	38.17	46.00	-7.83	50.50	1.90	27.00	12.77	0	400	Peak			VERTICAL
3 ! 431.58	41.41	46.00	-4.59	50.12	2.49	27.76	16.56	0	400	Peak			VERTICAL
4 527.61	38.26	46.00	-7.74	45.67	2.75	28.10	17.94	0	400	Peak			VERTICAL
5 721.61	37.84	46.00	-8.16	43.12	3.39	27.91	19.24	0	400	Peak			VERTICAL
6 ! 932.10	41.09	46.00	-4.91	43.99	3.60	27.27	20.77	0	400	Peak			VERTICAL
7 996.12	42.01	54.00	-11.99	44.08	3.69	27.02	21.26	0	400	Peak			VERTICAL


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Second Source – Mode 2>:

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	Normal Link

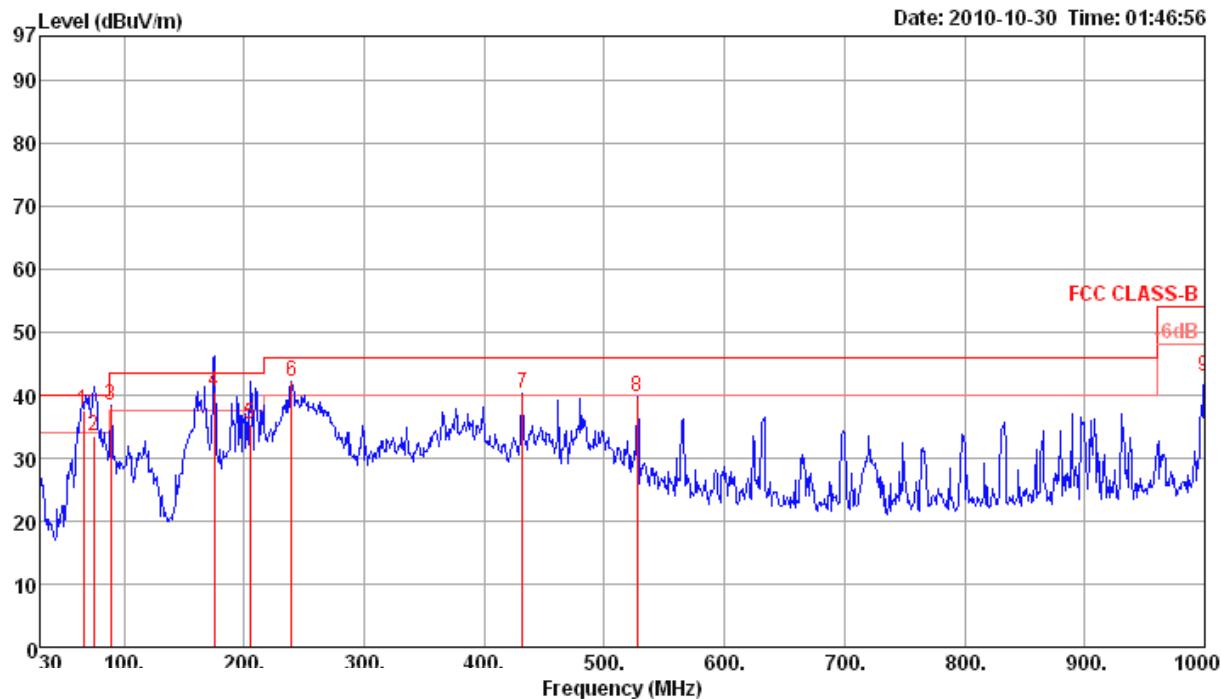Horizontal


Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 q	66.46	37.50	40.00	-2.50	57.67	0.88	27.74	6.69	193	274 QP	HORIZONTAL
2	75.00	33.63	40.00	-6.37	53.55	0.90	27.70	6.88	193	274 QP	HORIZONTAL
3 !	89.17	38.48	43.50	-5.02	56.23	1.10	27.65	8.80	0	100 Peak	HORIZONTAL
4 !	175.00	40.63	43.50	-2.87	53.15	1.58	27.22	13.12	202	179 QP	HORIZONTAL
5	205.12	35.37	43.50	-8.13	51.26	1.72	27.09	9.48	209	185 QP	HORIZONTAL
6 p	239.52	42.20	46.00	-3.80	55.38	1.86	27.02	11.98	0	100 Peak	HORIZONTAL
7 !	431.58	40.18	46.00	-5.82	48.89	2.49	27.76	16.56	0	100 Peak	HORIZONTAL
8	527.61	39.69	46.00	-6.31	47.10	2.75	28.10	17.94	0	100 Peak	HORIZONTAL
9	1000.00	43.07	54.00	-10.93	45.08	3.70	27.00	21.29	0	100 Peak	HORIZONTAL

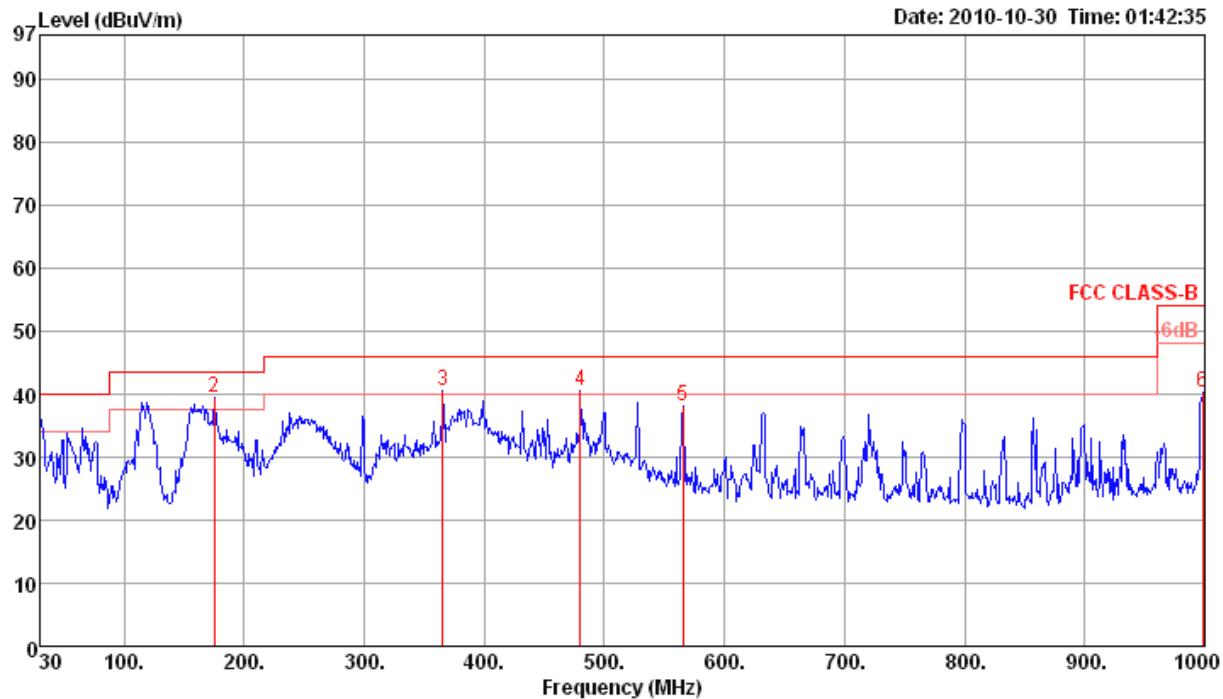Vertical


Freq MHz	Level dBuV/m	Limit Line dB	Over Limit dB	Read Level dBuV	Cable Loss dB	Preamp Factor dB	Antenna Factor dB/m	T/Pos deg	A/Pos cm	Remark	Pol/Phase
1 p	30.00	36.74	40.00	-3.26	45.28	0.50	27.80	18.76	0	400	Peak VERTICAL
2 !	175.50	39.44	43.50	-4.06	51.96	1.58	27.22	13.12	0	400	Peak VERTICAL
3 !	365.62	40.57	46.00	-5.43	50.56	2.23	27.36	15.14	0	400	Peak VERTICAL
4 !	480.08	40.50	46.00	-5.50	48.53	2.66	28.00	17.31	0	400	Peak VERTICAL
5	565.44	38.16	46.00	-7.84	45.06	2.83	28.10	18.37	0	400	Peak VERTICAL
6	998.06	40.23	54.00	-13.77	42.26	3.70	27.01	21.28	0	400	Peak VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For Main Source – Mode 1 with Printed Antenna>:

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	Channel 0 / Mode 1
Test Date	Oct. 22, 2010		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBm			dB	dBm	dB						
1 p	4803.85	47.36	74.00	-26.64	47.26	3.00	35.32	32.42	102	151	Peak		HORIZONTAL	
2 a	4803.95	33.04	54.00	-20.96	32.94	3.00	35.32	32.42	102	151	Average		HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBm			dB	dBm	dB						
1 p	4803.53	44.07	74.00	-29.93	43.97	3.00	35.32	32.42	102	203	Peak		VERTICAL	
2 a	4803.95	30.55	54.00	-23.45	30.45	3.00	35.32	32.42	102	203	Average		VERTICAL	



Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 1
Test Date	Oct. 22, 2010		

Horizontal

Freq	Level	Limit		Over Line	Read Limit	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg	
1 p	4881.92	49.34	74.00	-24.66	48.92	3.01	35.15	32.56	100	145	Peak	HORIZONTAL
2 a	4881.94	34.15	54.00	-19.85	33.73	3.01	35.15	32.56	100	145	Average	HORIZONTAL

Vertical

Freq	Level	Limit		Over Line	Read Limit	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg	
1 a	4881.95	31.70	54.00	-22.30	31.28	3.01	35.15	32.56	100	214	Average	VERTICAL
2 p	4882.45	45.62	74.00	-28.38	45.20	3.01	35.15	32.56	100	214	Peak	VERTICAL

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	Channel 78 / Mode 1
Test Date	Oct. 22, 2010		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB				
1 a	4959.92	38.51	54.00	-15.49	37.72	3.03	34.97	32.73	124	41	Average	HORIZONTAL
2 p	4959.99	55.43	74.00	-18.57	54.64	3.03	34.97	32.73	124	41	Peak	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB				
1 p	4959.56	51.24	74.00	-22.76	50.45	3.03	34.97	32.73	100	214	Peak	VERTICAL
2 a	4959.87	35.87	54.00	-18.13	35.08	3.03	34.97	32.73	100	214	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Second Source – Mode 1 with Printed Antenna>:

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	Channel 0 / Mode 1
Test Date	Oct. 22, 2010		

Horizontal

Freq	Level	Limit		Over Line	Read Limit	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4804.04	33.38	54.00	-20.62	32.11	3.29	33.02	35.04	52	107	Average	HORIZONTAL	
2	4804.37	48.25	74.00	-25.75	46.98	3.29	33.02	35.04	52	107	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Line	Read Limit	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4804.14	32.31	54.00	-21.69	31.04	3.29	33.02	35.04	255	100	Average	VERTICAL	
2	4804.32	46.79	74.00	-27.21	45.52	3.29	33.02	35.04	255	100	Peak	VERTICAL	

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	Channel 39 / Mode 1
Test Date	Oct. 22, 2010		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			deg	cm		
1	4881.92	46.35	74.00	-27.65	44.89	3.33	33.16	35.03	148	157	Peak	HORIZONTAL	
2	4882.11	31.91	54.00	-22.09	30.45	3.33	33.16	35.03	148	157	Average	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			deg	cm		
1	4881.62	43.05	74.00	-30.95	41.59	3.33	33.16	35.03	167	100	Peak	VERTICAL	
2	4881.99	29.77	54.00	-24.23	28.31	3.33	33.16	35.03	167	100	Average	VERTICAL	

Temperature	24.5°C	Humidity	57%
Test Engineer	Satoshi Yang	Configurations	Channel 78 / Mode 1
Test Date	Oct. 22, 2010		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Antenna Factor		Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m	dB					
1	4959.81	48.73	74.00	-25.27	47.04	3.37	33.33	35.01	327	100	Peak		HORIZONTAL	
2	4959.97	33.90	54.00	-20.10	32.21	3.37	33.33	35.01	327	100	Average		HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Antenna Factor		Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m	dB					
1	4959.98	31.82	54.00	-22.18	30.13	3.37	33.33	35.01	18	100	Average		VERTICAL	
2	4960.52	46.43	74.00	-27.57	44.74	3.37	33.33	35.01	18	100	Peak		VERTICAL	

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

<For Main Source – Mode 1 with Printed Antenna>:

Temperature	24.5°C			Humidity		57%		
Test Engineer	Satoshi Yang			Configurations		Channel 0, 39, 78 / Mode 1		
Test Date	Oct. 22, 2010							

Channel 0

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Preamp Factor	Antenna Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg		
1	2388.41	57.11	74.00	-16.89	27.20	2.04	0.00	27.87	121	173	Peak	HORIZONTAL	
2	2390.00	43.74	54.00	-10.26	13.82	2.05	0.00	27.87	122	173	Average	HORIZONTAL	
3 a	2402.00	73.75	54.00			2.05	0.00	27.87	121	173	Average	HORIZONTAL	
4 p	2402.14	106.14	74.00			2.05	0.00	27.87	121	173	Peak	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Preamp Factor	Antenna Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg		
1	2388.84	55.86	74.00	-18.14	25.95	2.04	0.00	27.87	107	357	Peak	VERTICAL	
2	2390.00	43.82	54.00	-10.18	13.90	2.05	0.00	27.87	107	357	Average	VERTICAL	
3 a	2441.00	78.54	54.00			2.08	0.00	27.78	107	357	Average	VERTICAL	
4 p	2441.29	104.62	74.00			2.08	0.00	27.78	107	357	Peak	VERTICAL	
5	2483.50	43.46	54.00	-10.54	13.63	2.10	0.00	27.73	107	357	Average	VERTICAL	
6	2483.50	55.08	74.00	-18.92	25.25	2.10	0.00	27.73	107	357	Peak	VERTICAL	

Item 1, 2 are the fundamental frequency at 2441 MHz.

Channel 78

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Preamp Factor	Antenna Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg		
1 a	2479.86	80.00	54.00			2.10	0.00	27.73	117	164	Average	HORIZONTAL	
2 p	2479.86	107.26	74.00			2.10	0.00	27.73	117	164	Peak	HORIZONTAL	
3 !	2483.50	49.19	54.00	-4.81	19.36	2.10	0.00	27.73	117	164	Average	HORIZONTAL	
4 !	2483.50	68.48	74.00	-5.52	38.65	2.10	0.00	27.73	117	164	Peak	HORIZONTAL	

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Second Source – Mode 1 with Printed Antenna>:

Temperature	24.5°C			Humidity		57%		
Test Engineer	Satoshi Yang			Configurations		Channel 0, 39, 78 / Mode 1		
Test Date	Oct. 22, 2010							

Channel 0

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.20	52.90	74.00	-21.10	22.52	2.21	28.17	0.00	335	100	Peak	VERTICAL	
2	2390.00	42.32	54.00	-11.68	11.93	2.22	28.17	0.00	335	100	Average	VERTICAL	
3	2402.00	69.02	54.00			2.22	28.21	0.00	335	100	Average	VERTICAL	
4	2402.20	102.18	74.00			2.22	28.21	0.00	335	100	Peak	VERTICAL	

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2441.00	70.52	54.00			2.24	28.29	0.00	342	100	Average	VERTICAL	
2	2441.20	104.64	74.00			2.24	28.29	0.00	342	100	Peak	VERTICAL	
3	2483.50	42.69	54.00	-11.31	12.06	2.26	28.37	0.00	342	100	Average	VERTICAL	
4	2483.90	54.62	74.00	-19.38	23.99	2.26	28.37	0.00	342	100	Peak	VERTICAL	

Item 1, 2 are the fundamental frequency at 2441 MHz.

Channel 78


Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2480.00	71.82	54.00			2.26	28.38	0.00	195	110	Average	HORIZONTAL	
2	2480.00	107.61	74.00			2.26	28.38	0.00	195	110	Peak	HORIZONTAL	
3	2483.50	48.19	54.00	-5.81	17.55	2.26	28.38	0.00	195	110	Average	HORIZONTAL	
4	2483.50	67.25	74.00	-6.75	36.61	2.26	28.38	0.00	195	110	Peak	HORIZONTAL	

Item 1, 2 are the fundamental frequency at 2480 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

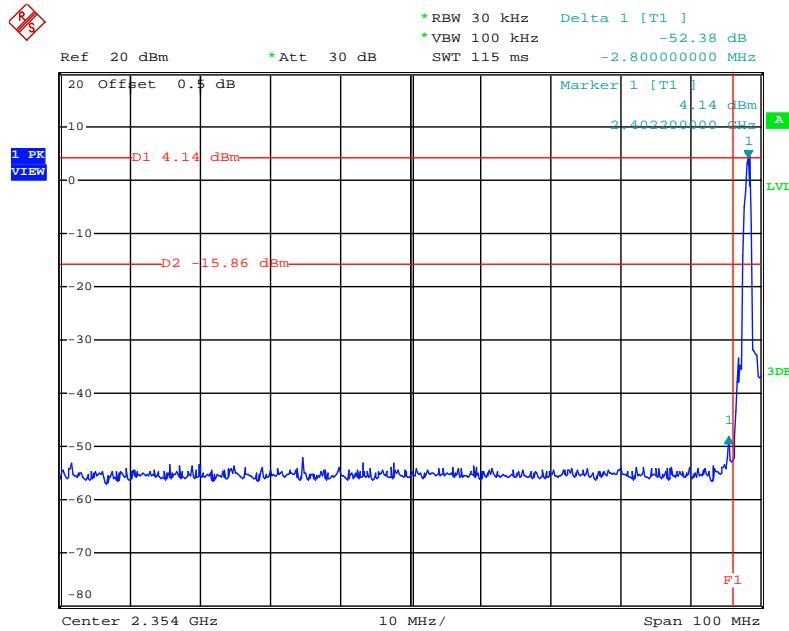For Emission not in Restricted Band
<For Main Source – Mode 1 with Printed Antenna>:
Low Band Edge Plot on Channel 0 / 2402 MHz


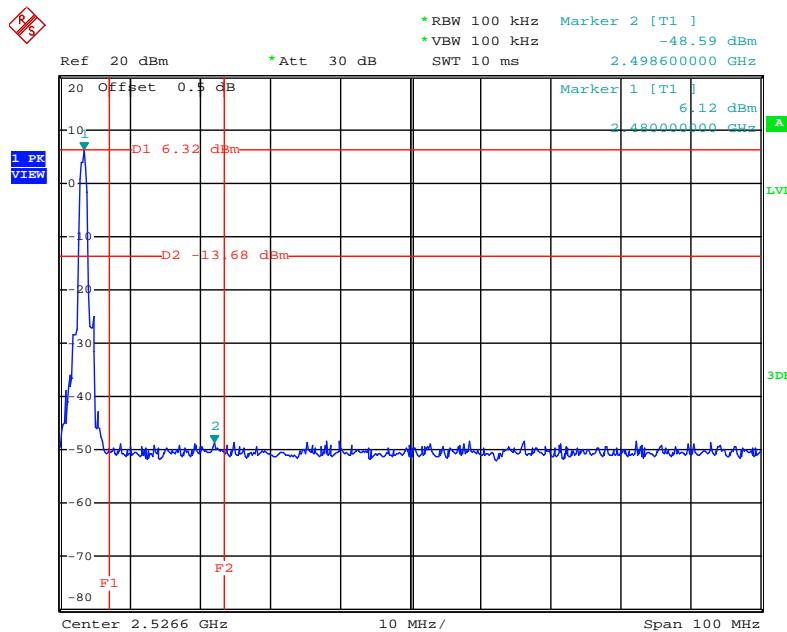
Date: 26.OCT.2010 14:09:56

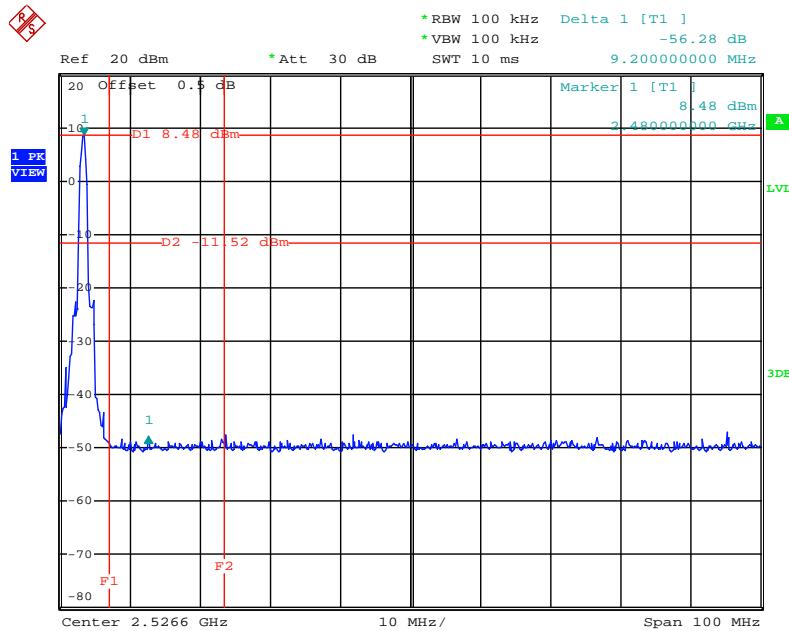High Band Edge Plot on Channel 78 / 2480 MHz


Date: 26.OCT.2010 13:57:47
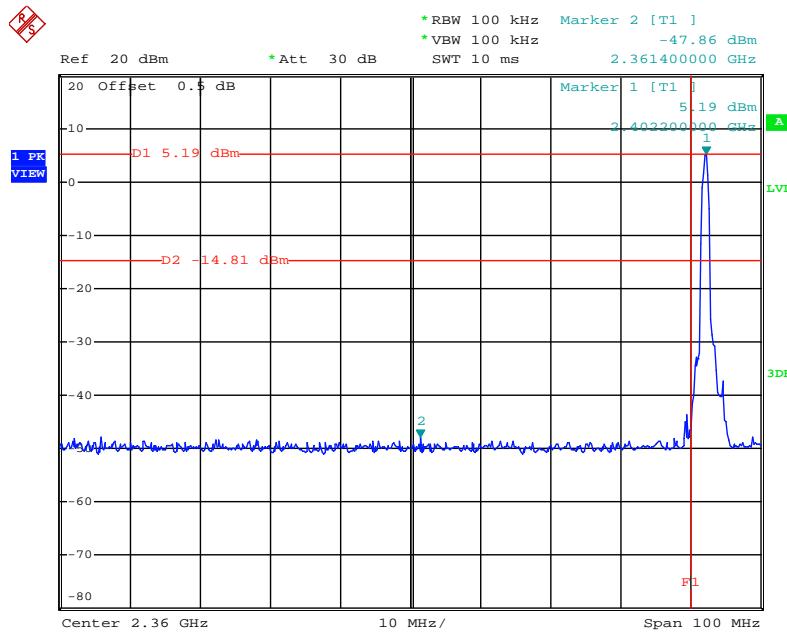
<For Second Source – Mode 1 with Printed Antenna>:
Low Band Edge Plot on Channel 0 / 2402 MHz


Date: 26.OCT.2010 17:01:20

High Band Edge Plot on Channel 78 / 2480 MHz


Date: 26.OCT.2010 17:07:37

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 01, 2010	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Apr. 24, 2010	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Oct. 30, 2009	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Jan. 04, 2010	Conduction (CO01-CB)
COND Cable	-	Cable	-	0.15MHz~30MHz	Dec. 04, 2009	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Oct. 17, 2010	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 13, 2009	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 08, 2010	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2009	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 06, 2009	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Nov. 17, 2009	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP	100304	9kHz ~ 40GHz	Nov. 06, 2009	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 06, 2010	Radiation (03CH01-CB)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2009*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	-	30 MHz - 1 GHz	Nov. 17, 2009	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	-	1 GHz - 40 GHz	Nov. 17, 2009	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	-	1 GHz - 40 GHz	Nov. 17, 2009	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP30	100023	9KHz~30GHz	Mar. 05, 2010	Conducted (TH01-CB)
Temp. and Humidity Chamber	TEN BILLION	TTH-D3SP	TBN-931011	-30~100°C	May. 21, 2010	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 25, 2009	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
Signal generator	R&S	SMU200A	102782	10MHz-40GHz	Mar. 09, 2010	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz – 18GHz	Apr. 16, 2010	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071042	1GHz – 18GHz	Oct. 14, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2009	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 13, 2010	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 08, 2010	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: For "*" Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate of Accreditation

This is to certify that

Sportun International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
Accreditation Program for Telecommunication Equipment
Testing Laboratory
Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



Annex

Declaration for Bluetooth Device acc to Part 15.247



1 Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device has no influence on the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason the check of these RF parameters in one op-mode is sufficient.

2 Frequency range of a Bluetooth device:

Hereby we declare that the maximum frequency of this device is: 2402 – 2480 MHz. This is according to the Bluetooth Core Specification (+ critical errata) for devices which will be operated in the USA.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04-E). Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification are not supported by this device.

3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organised in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from its BD address which is unique for each Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4 Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67,
56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59,
72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75,
09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06,
01, 51, 03, 55, 05, 04



5 Equally average use of frequencies in data mode and behaviour for short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 μ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire

LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR- operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour: The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 μ s). The hopping sequence will always differ from the first one.

6 Receiver input bandwidth and behaviour for repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master.

Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.



7 Dwell time in data mode

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is as follows:

Dwell time = time slot length * hop rate / number of hopping channels *30s

Example for a DH1 packet (with a maximum length of one time slot) Dwell time = 625 μ s * 1600 1/s / 79 * 30s = 0.3797s (in a 30s period)

For multislots packet the hopping is reduced according to the length of the packet. Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = 5 * 625 μ s * 1600 * 1/5 * 1/s / 79 * 30s = 0.3797s (in a 30s period).

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore all Bluetooth devices **comply** with the FCC dwell time requirement in data mode. This was checked during the Bluetooth Qualification tests. The Dwell time in hybrid mode is measured and stated in the test report.

8 Channel Separation in hybrid mode

The nominal channel spacing of the Bluetooth system is 1Mhz independent of the operating mode.

The maximum “initial carrier frequency tolerance” which is allowed for Bluetooth is $f_{center} = 75$ kHz.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz).

Additionally an example for the channel separation is given in the test report

9 Derivation and examples for a hopping sequence in hybrid mode

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see chapter 5), but this time with different input vectors:

- For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.
- For the page hop sequence, the device address of the paged unit is used as input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.

So it is ensured that also in hybrid mode the frequency use is equally averaged.

Example of a hopping sequence in inquiry mode:

48, 50, 09, 13, 52, 54, 41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23



Example of a hopping sequence in paging mode:

08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

10 Receiver input bandwidth and synchronisation in hybrid mode:

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code, the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, an special access code, derived from the BD_ADDRESS of the paged device will be, will be sent by the master of this connection.

Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced considerable.

11 Spread rate / data rate of the direct sequence signal

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate / Data rate will be 68/1.

12 Spurious emission in hybrid mode

The dwell time in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.

13 Peak power spectral density measurement

Since the transmitter is only active for some milliseconds on one channel you would get a result with many interruptions if using a sweep time of e.g. 1s as stated in the FCC rules. Therefore a fast sweep in maxhold function is used instead and the EUT is activated several times until the measurement curve has stabilized.