



## FCC PART 15.231

### TEST REPORT

For

**Yangzhou Fupond Electronic Technology Co.,Ltd.**

Hangji Industrial Park, Yangzhou, Jiangsu Province, China

**FCC ID: TXRFPT0614**

|   |  |
|---|--|
| <b>Report Type:</b><br>Original Report  | <b>Product Type:</b><br>Wireless Key Finder  |
| <b>Test Engineer:</b> <u>Mike Hu</u>    |  |
| <b>Report Number:</b> <u>RSZ140527003-00</u>  |  |
| <b>Report Date:</b> <u>2014-07-08</u>   |  |
| <b>Reviewed By:</b><br><u>Jimmy Xiao</u><br><u>RF Engineer</u>  |  |
| <b>Prepared By:</b><br>Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F, the 3rd Phase of WanLi Industrial Building,<br>ShiHua Road, FuTian Free Trade Zone<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |  |

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

|   |           |
|---|-----------|
| <b>GENERAL INFORMATION.....</b>                                     | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....             | 3         |
| OBJECTIVE .....   | 3         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                  | 3         |
| TEST METHODOLOGY .....  | 3         |
| TEST FACILITY .....   | 4         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                               | <b>5</b>  |
| JUSTIFICATION .....   | 5         |
| SPECIAL ACCESSORIES.....  | 5         |
| EQUIPMENT MODIFICATIONS .....                                       | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                                   | 5         |
| <b>SUMMARY OF TEST RESULTS.....</b>                                 | <b>6</b>  |
| <b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>                       | <b>7</b>  |
| APPLICABLE STANDARD .....   | 7         |
| ANTENNA CONNECTOR CONSTRUCTION .....                                | 7         |
| <b>FCC §15.205, §15.209, §15.231 (E) - RADIATED EMISSIONS .....</b> | <b>8</b>  |
| APPLICABLE STANDARD .....   | 8         |
| MEASUREMENT UNCERTAINTY .....                                       | 8         |
| EUT SETUP .....   | 9         |
| EMI TEST RECEIVER SETUP .....                                       | 9         |
| TEST PROCEDURE .....  | 10        |
| TEST EQUIPMENT LIST AND DETAILS.....                                | 10        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                      | 10        |
| TEST RESULTS SUMMARY .....  | 11        |
| TEST DATA .....   | 11        |
| <b>FCC §15.231(C) – 20 DB EMISSION BANDWIDTH TESTING.....</b>       | <b>15</b> |
| APPLICABLE STANDARD .....   | 15        |
| TEST EQUIPMENT LIST AND DETAILS.....                                | 15        |
| TEST PROCEDURE .....  | 15        |
| TEST DATA .....   | 15        |
| <b>FCC §15.231(E) – TRANSMISSION AND SILENT PERIOD TESTING.....</b> | <b>17</b> |
| APPLICABLE STANDARD .....   | 17        |
| TEST PROCEDURE .....  | 17        |
| TEST EQUIPMENT LIST AND DETAILS.....                                | 17        |
| TEST DATA .....   | 17        |
| <b>PRODUCT SIMILARITY DECLARATION LETTER.....</b>                   | <b>20</b> |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *YANGZHOU FUPOND ELECTRONIC TECHNOLOGY CO., LTD.*.'s product, model number: *STG-5938-KB* (FCC ID: *TXRFP0614*) (or the "EUT") in this report was a *Wireless Key Finder*, which was measured approximately: 6.4 cm (L) x 3.7 cm (W) x 0.5 cm (H), rated input voltage: DC 6V battery.

*Note: The serial models STG-5933-JB is electrically identical with the model number STG-5938-KB that was tested by BACL, they are different in model numbers, which was explained in the attached product similarity declaration letter that provided and guaranteed by applicant.*

*\*All measurement and test data in this report was gathered from production sample serial number: 1405171 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2014-05-27.*

### Objective

This is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4-2009.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

### Related Submittal(s)/Grant(s)

No related submittal(s)

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## **SYSTEM TEST CONFIGURATION**

### **Justification**

The system was configured for testing in a typical fashion (as normally used by a typical user).


### **Special Accessories**

N/A

### **Equipment Modifications**

No modification was made to the EUT.

### **Block Diagram of Test Setup**

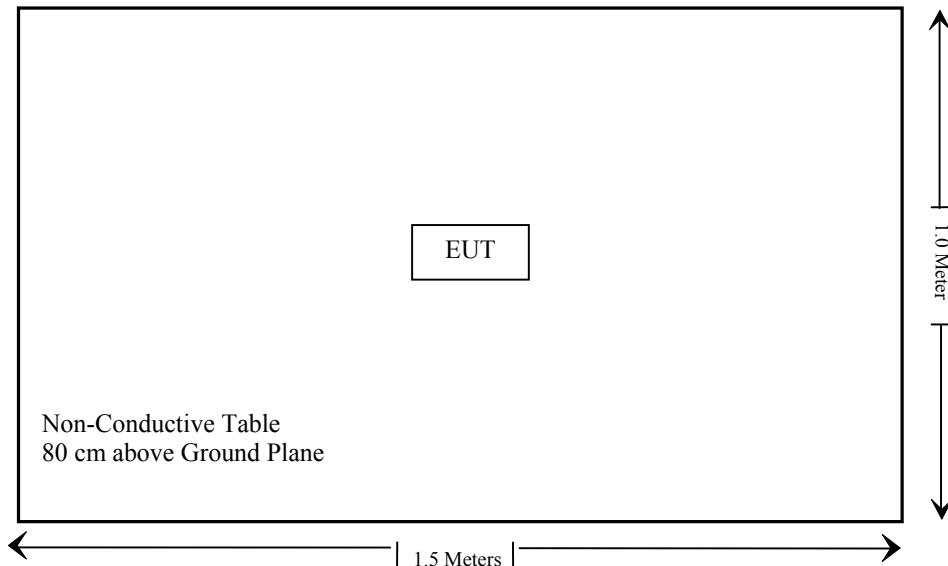

**SUMMARY OF TEST RESULTS**

| FCC Rules                     | Description of Test              | Result         |
|-------------------------------|----------------------------------|----------------|
| §15.203                       | Antenna Requirement              | Compliance     |
| §15.207 (a)                   | Conducted Emissions              | Not Applicable |
| §15.205, §15.209, §15.231 (b) | Radiated Emissions               | Compliance     |
| §15.231 (c)                   | 20dB Emission Bandwidth          | Compliance     |
| §15.231 (e)                   | Transmission Time, Silent period | Compliance     |

Not Applicable: The EUT is powered by battery only.

## **FCC §15.203 - ANTENNA REQUIREMENT**

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connector Construction**

The EUT has a monopole antenna arrangement, which was permanently attached and the gain was -1.0dBi, fulfill the requirement of this section. Please refer to EUT photos.

**Result:** Compliant.

**FCC §15.205, §15.209, §15.231 (e) - RADIATED EMISSIONS****Applicable Standard**

FCC §15.205, §15.209, §15.231 (e)

According to §15.231 (e), intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:

| Fundamental frequency<br>(MHz) | Field Strength of<br>Fundamental<br>(Microvolts /meter) | Field Strength of spurious<br>emissions<br>(Microvolts /meter) |
|--------------------------------|---|--|
| 40.66-40.70                    | 1000  | 100  |
| 70-130                         | 500   | 50   |
| 130-174                        | 500 to 1500**   | 50 to 150**  |
| 174-260                        | 1500  | 150  |
| 260-470                        | 1500 to 5000**  | 150 to 500**   |
| Above 470                      | 5000  | 500  |

\*\*Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.


**Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, and it will not be taken into consideration for the test data recorded in the report.

## EUT Setup

Below 1 GHz:

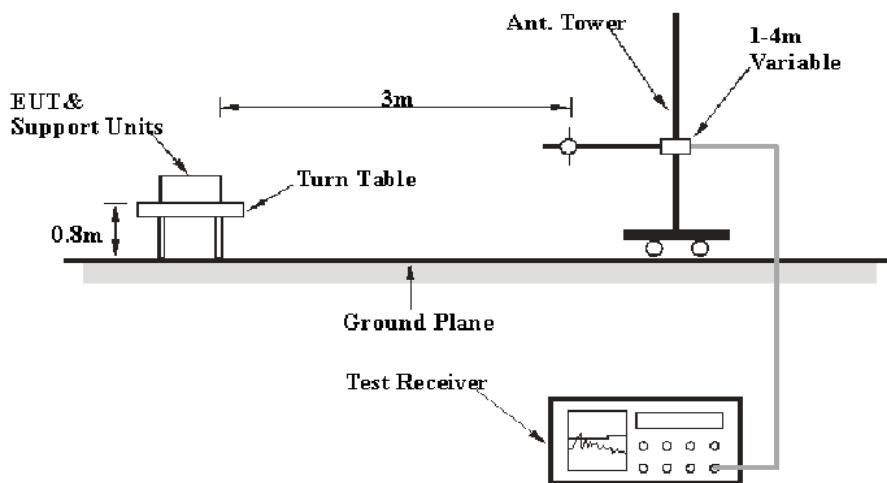

Above 1 GHz:

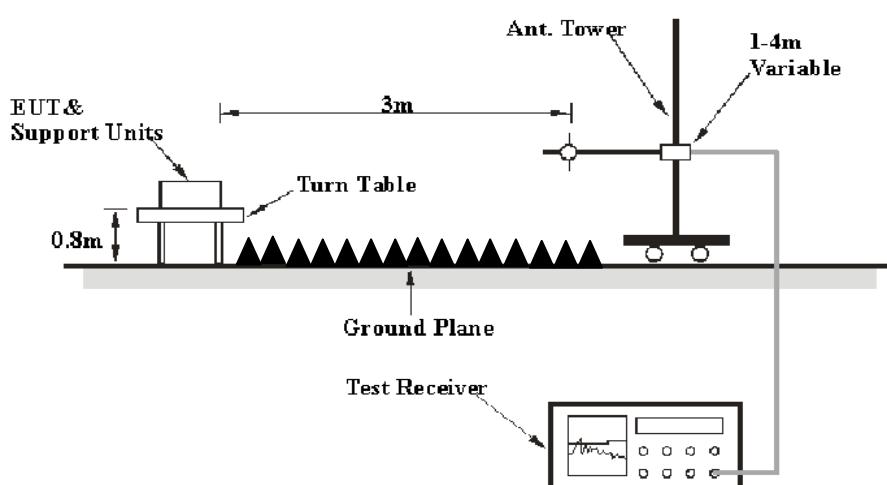

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4 - 2009. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

| Frequency Range  | RBW     | Video B/W | IF B/W  | Detector |
|------------------|---------|-----------|---------|----------|
| 30MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP       |
| Above 1 GHz      | 1 MHz   | 3 MHz     | /       | PK       |

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak detection mode above 1 GHz.

## Test Equipment List and Details

| Manufacturer    | Description       | Model      | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|------------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI       | 101122        | 2013-09-17       | 2014-09-17           |
| HP              | Amplifier         | 8447E      | 1937A01046    | 2013-09-30       | 2014-09-30           |
| Sunol Sciences  | Broadband Antenna | JB1        | A040904-2     | 2011-11-28       | 2014-11-27           |
| Rohde & Schwarz | Signal Analyzer   | FSIQ26     | 8386001028    | 2013-11-12       | 2014-11-12           |
| Mini            | Pre-amplifier     | ZVA-183-S+ | 5969001149    | 2014-04-03       | 2015-04-03           |
| Sunol Sciences  | Horn Antenna      | DRH-118    | A052304       | 2011-12-01       | 2014-11-30           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 5.8 dB means the emission is 5.8 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.205, §15.209, §15.231 (e), the worst margin reading as below:

**17.11 dB at 2169.6 MHz in the Vertical polarization**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\lim} + U_{\text{cisp}}$$

In BACL.,  $U_{(L_m)}$  is less than  $+ U_{\text{cisp}}$ , if  $L_m$  is less than  $L_{\lim}$ , it implies that the EUT complies with the limit.

## Test Data

### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 26 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Mike Hu on 2014-06-11.*

*Test mode: Transmitting*

**30MHz-5GHz:**

| Frequency (MHz) | Receiver             |                       | Turntable Degree | Rx Antenna |             | Corrected Factor (dB) | Corrected Amplitude (dB $\mu$ V/m) | FCC Part 15.231/205/209 |             |             |
|-----------------|----------------------|-----------------------|------------------|------------|-------------|-----------------------|------------------------------------|-------------------------|-------------|-------------|
|                 | Reading (dB $\mu$ V) | Detector (PK/QP/Ave.) |                  | Height (m) | Polar (H/V) |                       |                                    | Limit (dB $\mu$ V/m)    | Margin (dB) | Comment     |
| 433.92          | 68.86                | PK                    | 105              | 1.1        | H           | -10.7                 | 58.16                              | 92.87                   | 34.71       | Fundamental |
| 433.92          | 65.96                | PK                    | 75               | 1.3        | V           | -10.7                 | 55.25                              | 92.87                   | 37.62       | Fundamental |
| 867.8           | 40.07                | PK                    | 66               | 1.0        | H           | -4.4                  | 35.67                              | 72.87                   | 37.20       | Harmonic    |
| 867.8           | 39.24                | PK                    | 125              | 1.3        | V           | -4.4                  | 34.84                              | 72.87                   | 38.03       | Harmonic    |
| 1301.8          | 37.68                | PK                    | 231              | 1.1        | H           | 0.16                  | 37.84                              | 74.00                   | 36.16       | Harmonic    |
| 1301.8          | 38.14                | PK                    | 272              | 1.1        | V           | 0.16                  | 38.30                              | 74.00                   | 35.70       | Harmonic    |
| 1735.7          | 39.54                | PK                    | 120              | 1.3        | H           | 2.24                  | 41.78                              | 72.87                   | 31.09       | Harmonic    |
| 1735.7          | 37.46                | PK                    | 70               | 1.2        | V           | 2.24                  | 39.70                              | 72.87                   | 33.17       | Harmonic    |
| 2169.6          | 36.84                | PK                    | 131              | 1.0        | H           | 3.94                  | 40.78                              | 72.87                   | 32.09       | Harmonic    |
| 2169.6          | 39.80                | PK                    | 112              | 1.1        | V           | 3.94                  | 43.74                              | 72.87                   | 29.13       | Harmonic    |

| Field Strength of Average Emission |                                     |             |                                   |                                    |                         |             |             |
|------------------------------------|-------------------------------------|-------------|-----------------------------------|------------------------------------|-------------------------|-------------|-------------|
| Frequency (MHz)                    | Peak Measurement @3m (dB $\mu$ V/m) | Polar (H/V) | Duty Cycle Correction Factor (dB) | Corrected Amplitude (dB $\mu$ V/m) | FCC Part 15.231/205/209 |             |             |
|                                    |                                     |             |                                   |                                    | Limit (dB $\mu$ V/m)    | Margin (dB) | Comment     |
| 433.92                             | 58.16                               | H           | -7.98                             | 50.18                              | 72.87                   | 22.69       | Fundamental |
| 433.92                             | 55.25                               | V           | -7.98                             | 47.27                              | 72.87                   | 25.60       | Fundamental |
| 867.8                              | 35.67                               | H           | -7.98                             | 27.69                              | 52.87                   | 25.18       | Harmonic    |
| 867.8                              | 34.84                               | V           | -7.98                             | 26.86                              | 52.87                   | 26.01       | Harmonic    |
| 1301.8                             | 37.84                               | H           | -7.98                             | 29.86                              | 54.00                   | 24.14       | Harmonic    |
| 1301.8                             | 38.30                               | V           | -7.98                             | 30.32                              | 54.00                   | 23.68       | Harmonic    |
| 1735.7                             | 41.78                               | H           | -7.98                             | 33.80                              | 52.87                   | 19.07       | Harmonic    |
| 1735.7                             | 39.70                               | V           | -7.98                             | 31.72                              | 52.87                   | 21.15       | Harmonic    |
| 2169.6                             | 40.78                               | H           | -7.98                             | 32.80                              | 52.87                   | 20.07       | Harmonic    |
| 2169.6                             | 43.74                               | V           | -7.98                             | 35.76                              | 52.87                   | 17.11       | Harmonic    |

Note:


Calculate Average value based on Duty Cycle correction factor:

$$\begin{aligned} T_{on} &= T_{on1}N_1 + T_{on2}N_2 + \dots + T_{onn}N_n \\ &= 240.5\mu s * 56 + 601.2\mu s * 44 = 13468\mu s + 26452.8\mu s = 39.92ms \end{aligned}$$

T<sub>p</sub> = 100ms


$$\text{Duty cycle factor} = 20 * \log(T_{on}/T_p) = 20 * \log(39.92/100) = -7.98$$

## Duty Cycle 1

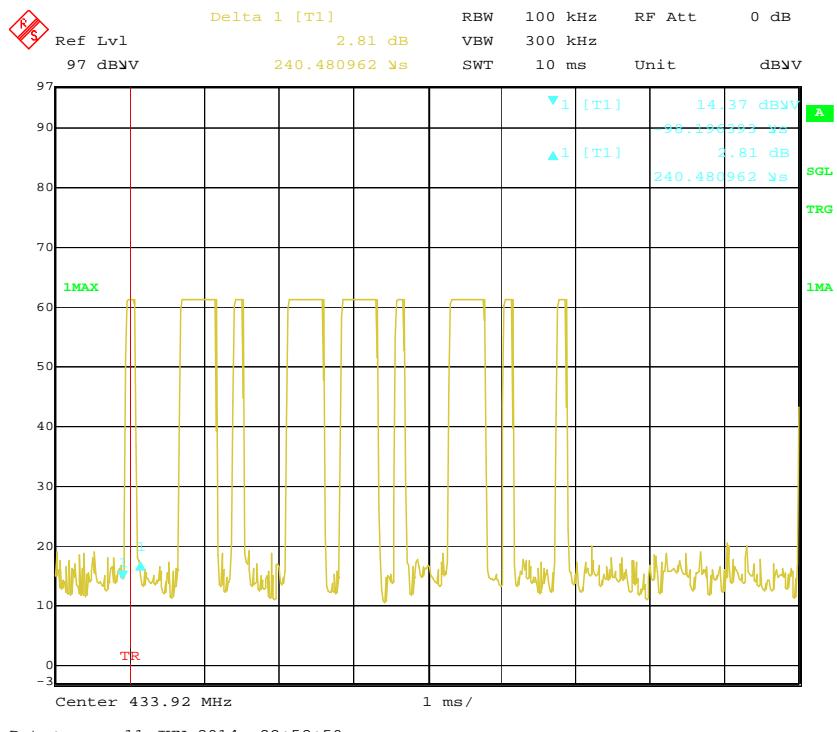


Date: 11.JUN.2014 22:52:50

## Duty Cycle 2

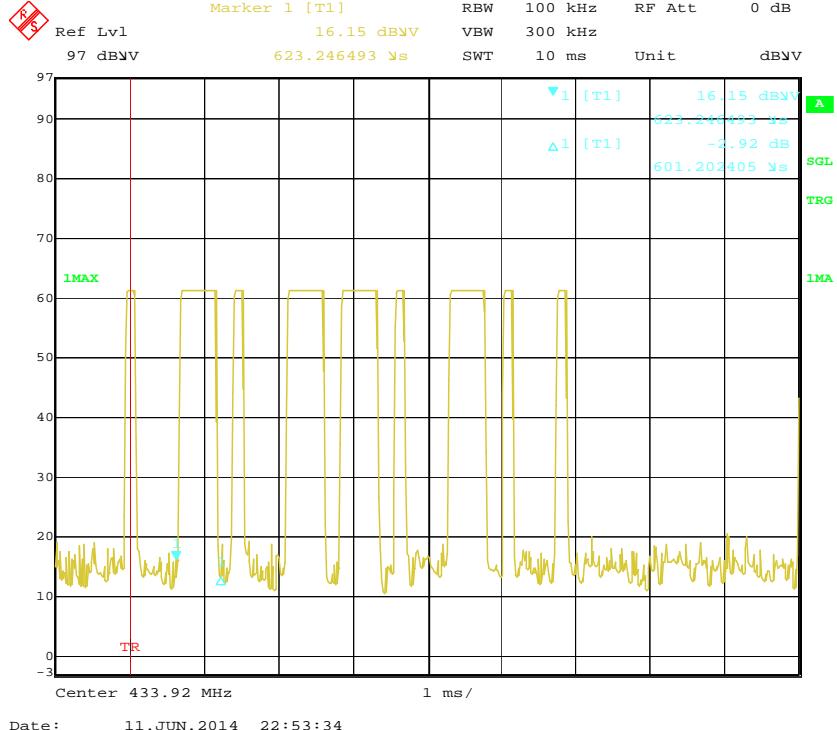

Date: 11.JUN.2014 22:53:34

## Duty Cycle 3

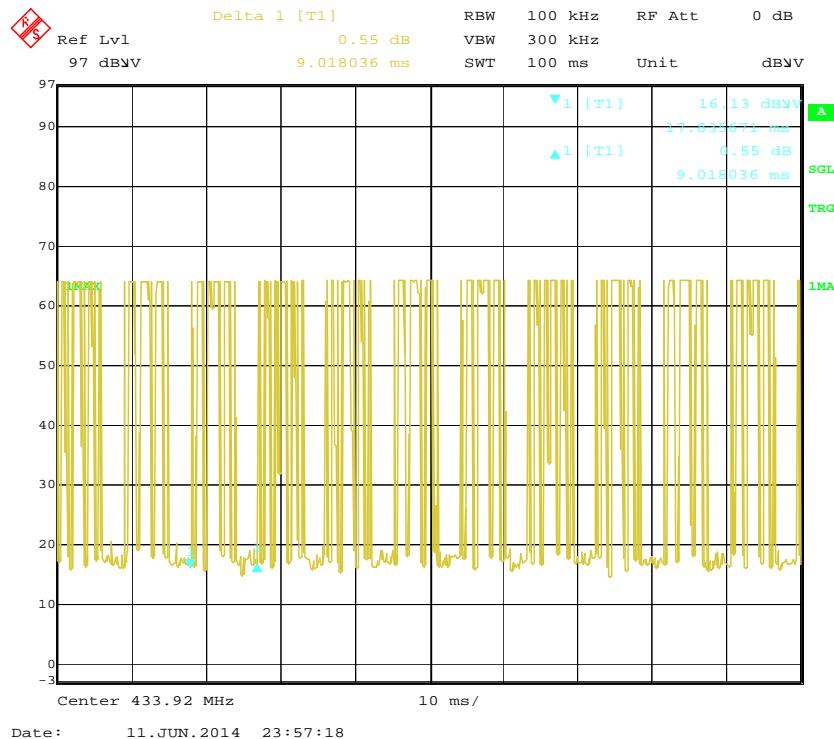

Date: 11.JUN.2014 23:57:18

## FCC §15.231(c) – 20 dB EMISSION BANDWIDTH TESTING

### Applicable Standard

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### Test Equipment List and Details

| Manufacturer    | Description     | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 837405/023    | 2014-05-31       | 2015-05-31           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

With the EUT's antenna attached, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 26 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 101.0 kPa |


*The testing was performed by Mike Hu on 2014-06-11.*

*Test Mode: Transmitting*

Please refer to following table and plot.

| Channel Frequency (MHz) | 20 dB Emission Bandwidth (kHz) | <Limit (kHz) | Result |
|-------------------------|--------------------------------|--------------|--------|
| 433.92                  | 54.11                          | 1084.8       | Pass   |

Note: Limit = 0.25% \* center frequency = 0.25% \* 433.92 MHz = 1.0848 MHz  
20dB bandwidth = 54.11kHz < 1.0848 MHz

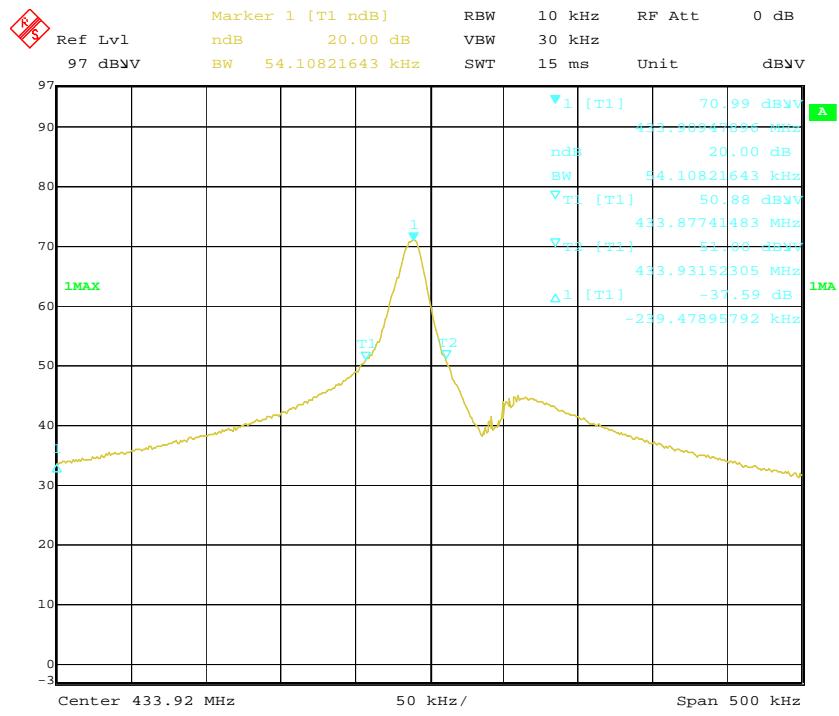**20 dB Emission Bandwidth**

## FCC §15.231(e) – TRANSMISSION AND SILENT PERIOD TESTING

### Applicable Standard

Per FCC §15.231(e), devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer=operating frequency.
3. Set the spectrum analyzer as RBW=100kHz, VBW=100kHz, Span=0Hz.
4. Repeat above procedures until all frequency measured was complete.

### Test Equipment List and Details

| Manufacturer    | Description     | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 837405/023    | 2014-05-31       | 2015-05-31           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 26 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Mike Hu on 2014-06-11.*

*Test Mode: Transmitting*

Deactivation

| Transmission period<br>(s) | Limit<br>(s) | Result |
|----------------------------|--------------|--------|
| 0.281 s                    | < 1 s        | Pass   |


Silent period

| Silent period<br>(s) | Limit<br>(s) | Result |
|----------------------|--------------|--------|
| 10.48 s              | > 10 s       | Pass   |


Note: The silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.  
The duration time is 0.281 s,  $0.281 \times 30 = 8.43$  s.

**Test Result:** Compliant, please refer to following plot

## Transmission period

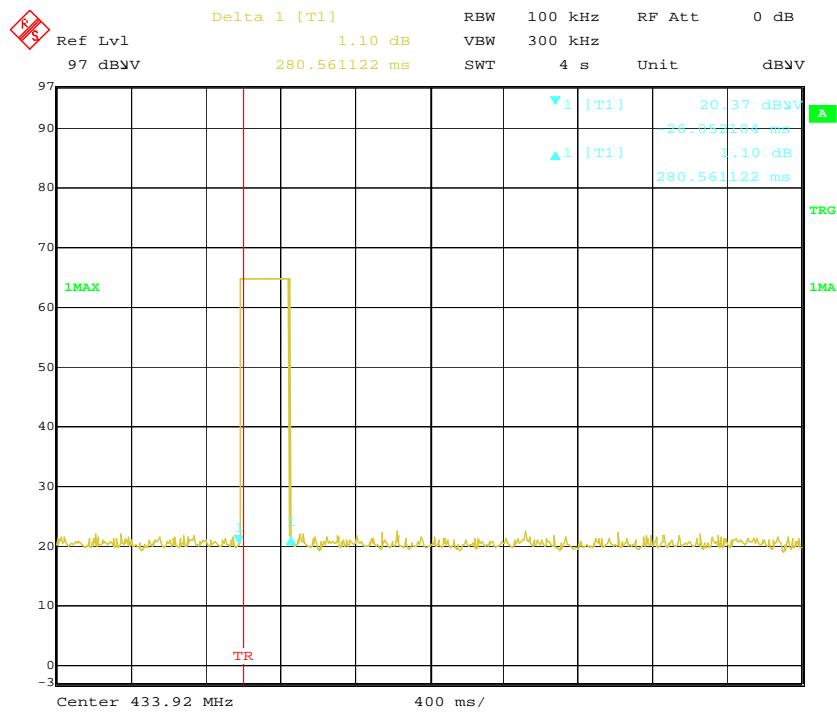

## Silent period

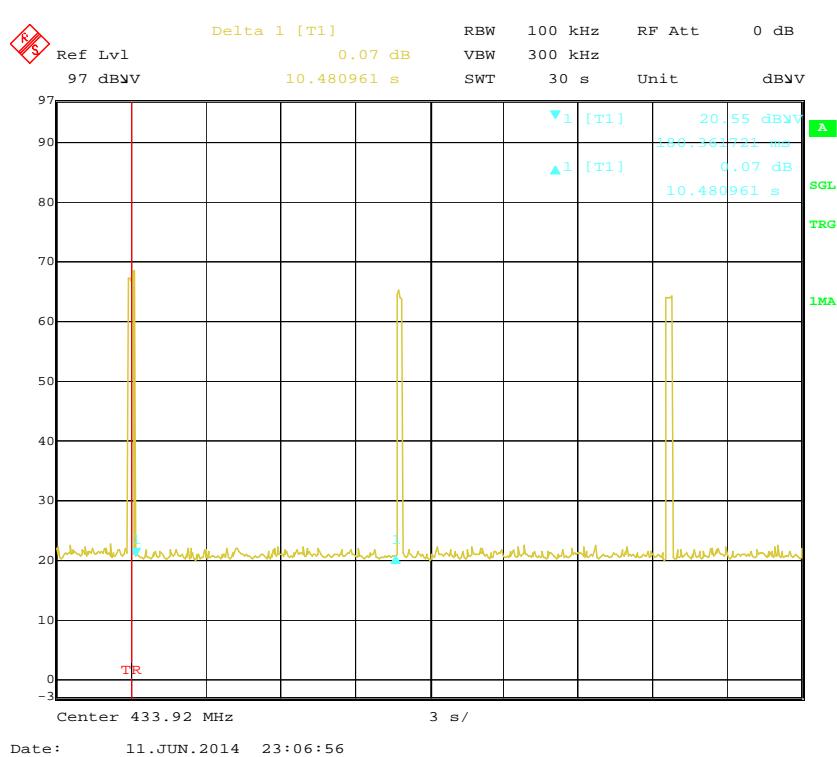

## PRODUCT SIMILARITY DECLARATION LETTER

**Fupond Technology**

**Yangzhou Fupond Electronic Technology Co.,Ltd.**

Address: HangJi Industrial Park, Yangzhou, Jiangsu Province, China

Tel: 0514 87492777 Fax: 0514 87492866

2014-6-19

### Product Similarity Declaration


To Whom It May Concern,

We, Yangzhou Fupond Electronic Technology Co.,Ltd., hereby declare that our Wireless Key Finder, Model Number: STG-5933-JB is electrically identical with the model number STG-5938-KB that was tested by BACL. They are just different in model number.

Please contact me if you have any question.

Signature

Robert Wong  
Manager

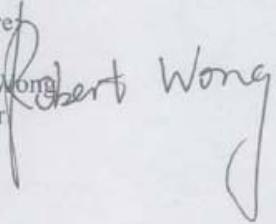

\*\*\*\*\*END OF REPORT\*\*\*\*\*