

# FCC PART 15 CLASS B

## EMI MEASUREMENT AND TEST REPORT

For

**Morning IT Co., Ltd.**

1-210, Byeoksan Digital Valley, Seoul, Korea

**FCC ID: TYHMIT2000**

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> PinPad
<b>Test Engineer:</b> Oscar Au 	
<b>Report Number:</b> R0601123	
<b>Report Date:</b> 2006-02-02	
<b>Reviewed By:</b> Snell Leong 	
<b>Prepared By:</b> Bay Area Compliance Laboratory Corporation 1274 Anvilwood Ave. Sunnyvale, CA 94089 Tel: (408) 732-9162 Fax: (408) 732-9164	

**Note:** The test report is specially limited to the use of the above client company and this particular sample only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

**TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
EUT EXERCISE SOFTWARE .....	5
SPECIAL ACCESSORIES .....	5
SCHEMATICS / BLOCK DIAGRAM.....	5
EQUIPMENT MODIFICATIONS .....	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	5
INTERFACE PORTS AND CABLING.....	5
CONFIGURATION OF TEST SYSTEM .....	6
TEST SETUP BLOCK DIAGRAM .....	6
<b>SUMMARY OF TEST REPORT.....</b>	<b>7</b>
<b>§15.107 - CONDUCTED EMISSIONS .....</b>	<b>8</b>
MEASUREMENT UNCERTAINTY .....	8
EUT SETUP .....	8
RECEIVER SETUP.....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE .....	8
TEST RESULTS SUMMARY .....	9
CONDUCTED EMISSIONS TEST DATA .....	9
PLOTS OF CONDUCTED EMISSION .....	9
<b>§15.109 - RADIATED EMISSIONS.....</b>	<b>12</b>
MEASUREMENT UNCERTAINTY .....	12
EUT SETUP .....	12
RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE .....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
SUMMARY OF TEST RESULTS .....	13
RADIATED EMISSIONS TEST DATA, MEASURE AT 10 METER, AND CONVERT TO 3 METER.....	14

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The *Morning IT Co., Ltd.* product, FCC ID: *TYHMIT2000*, or the "EUT" as referred to this report, is a PinPad, which measures approximately 210mmL x110mmW x 100mmH.

*\* The test data gathered are from production sample, serial number: MIT0001, provided by the manufacturer.*

### Objective

This Class B report is prepared on behalf of *Morning IT Co., Ltd.* in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with U.S.A. FCC Class B and Canada ICES-003 issue 4 limits for conducted and radiated margin requirements for Information Technology Equipment.

### Related Submittal(s)/Grant(s)

No Related Submittals.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp.

### Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California 94085, USA with registration number: 90464.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules and Article 8 of the VCCI regulations. The facility also complies with the test methods and procedures set forth in ANSI C63.4-2003.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations is attached hereinafter and can also be found at  
<http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was tested in accordance with ANSI C63.4-2003.

### EUT Exercise Software

The EUT exercising software program was designed to exercise the various installed components in accordance with ANSI C63.4-2003.

### Special Accessories

The unit was tested with the normally supplied cabling and accessories provided by the supporting equipment and no special accessories were used.

### Schematics / Block Diagram

Exhibit D contains a copy of the EUT's schematics diagram as reference.

### Equipment Modifications

No modifications were made to the EUT.

### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Compaq	Notebook	Presario 2100	CNF43403FB	DOC


### Power Supply and Line Filters

Manufacturer	Description	Model	Serial Number	FCC ID
Compaq	AC-DC adaptor	Series PPP014L	N/A	N/A


### Interface Ports and Cabling

Cable Description	Length (M)	From	To
Unshielded USB Cable	1.5	USB Port/ EUT	USB Port / Notebook

## Configuration of Test System

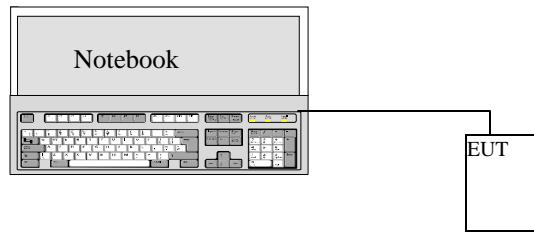

## Test Setup Block Diagram

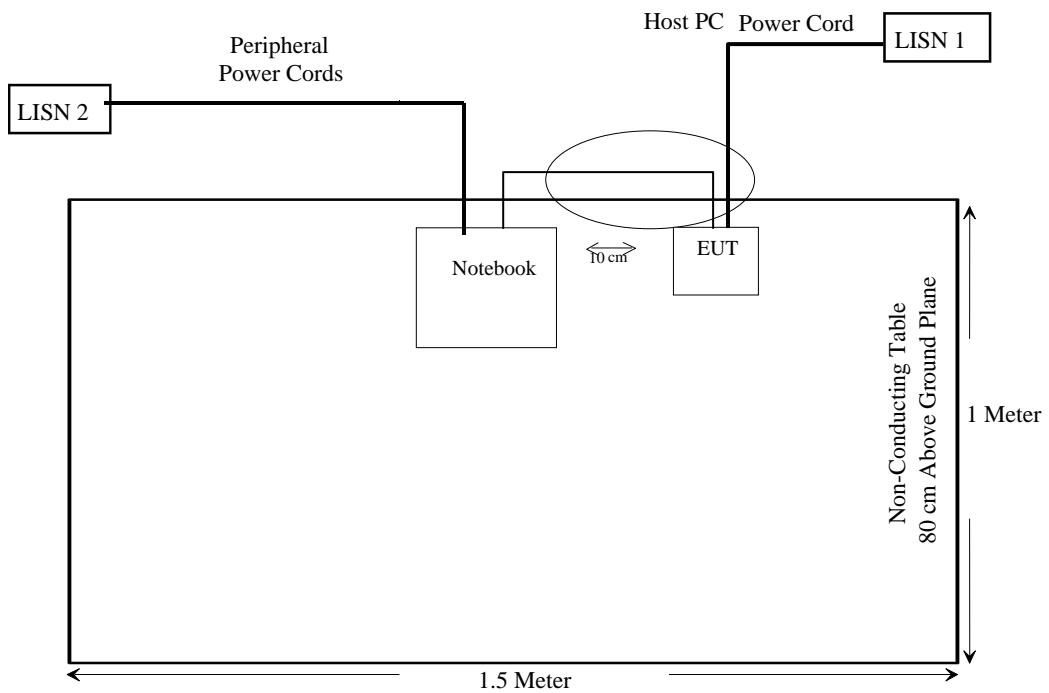

**SUMMARY OF TEST REPORT**

RULE	DESCRIPTION	RESULTS
15.107	Conducted Emissions	Compliant
15.109	Radiated Emissions	Complies
15.19	Labelling Requirements	Compliant
15.21, 15.105	Information to the User	Compliant
15.27	Special Accessories	Compliant

## §15.107 - CONDUCTED EMISSIONS

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are receiver, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is  $\pm 2.4$  dB.

### EUT Setup

The measurement was performed in the shielded room, using the same setup per ANSI C63.4-2003 measurement procedure. The specification used was FCC 15 Class B limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and bundled as required.

The adapter was connected to 120Vac/60Hz power source.

### Receiver Setup

The receiver was set to investigate the frequency from 150 kHz to 30MHz.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schewarz	Artificial-Mains Network	ESH2-Z5	871884/039	2005-11-14
Rohde & Schewarz	EMI Test Receiver	ESCS30	100176	2005-09-15
Fluke	Calibrated Voltmeter	189	18485-38	2005-06-15

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Test Procedure

During the conducted emission test, the EUT was connected to the mains outlet of the LISN-1. Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Average readings are distinguished with an “Ave”.

## Test Results Summary

According to the recorded data, the EUT complied with the FCC Conducted limits for a Class B device, with the worst margin reading of:

**-2.5 dB at 0.210 MHz** on the **Neutral** conductor mode.

## Conducted Emissions Test Data

### Environmental Conditions

Temperature:	18 °C
Relative Humidity:	39%
ATM Pressure:	1012mbar

*\*Testing was performed by Oscar Au on 2006-01-25.*

LINE CONDUCTED EMISSIONS				FCC15 CLASS B	
Frequency MHz	Amplitude dB $\mu$ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB $\mu$ V	Margin dB
0.210	50.7	Ave	Neutral	53.21	-2.5
0.225	47.6	Ave	Line	52.63	-5.0
0.210	55.4	QP	Neutral	63.21	-7.8
0.225	52.0	QP	Line	62.63	-10.6
1.000	35.0	Ave	Line	46.00	-11.0
3.420	41.8	QP	Line	56.00	-14.2
1.000	40.0	QP	Line	56.00	-16.0
0.310	43.4	QP	Neutral	59.97	-16.6
0.415	29.6	Ave	Neutral	47.55	-17.9
0.310	31.8	Ave	Neutral	49.97	-18.2
0.415	38.7	QP	Neutral	57.55	-18.8
3.420	26.1	Ave	Line	46.00	-19.9

## Plots of Conducted Emission

The plots of conducted emission are presented hereinafter as reference.

## Bay Area Compliance Laboratory Corp

25. Jan 06 19:51


## Class B

EUT: PinPad MIT-2000  
Manuf: MorningIT  
Op Cond: Normal  
Operator: OSCAR  
Comment: N  
File name: 120VAC

W  
1/25/06

## Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150K	1M	5K	8K	QP+AV	20ms	15dBILN	OFF
1M	5M	10K	9K	QP+AV	1ms	15dBILN	OFF
5M	30M	100K	8K	QP+AV	1ms	15dBILN	OFF

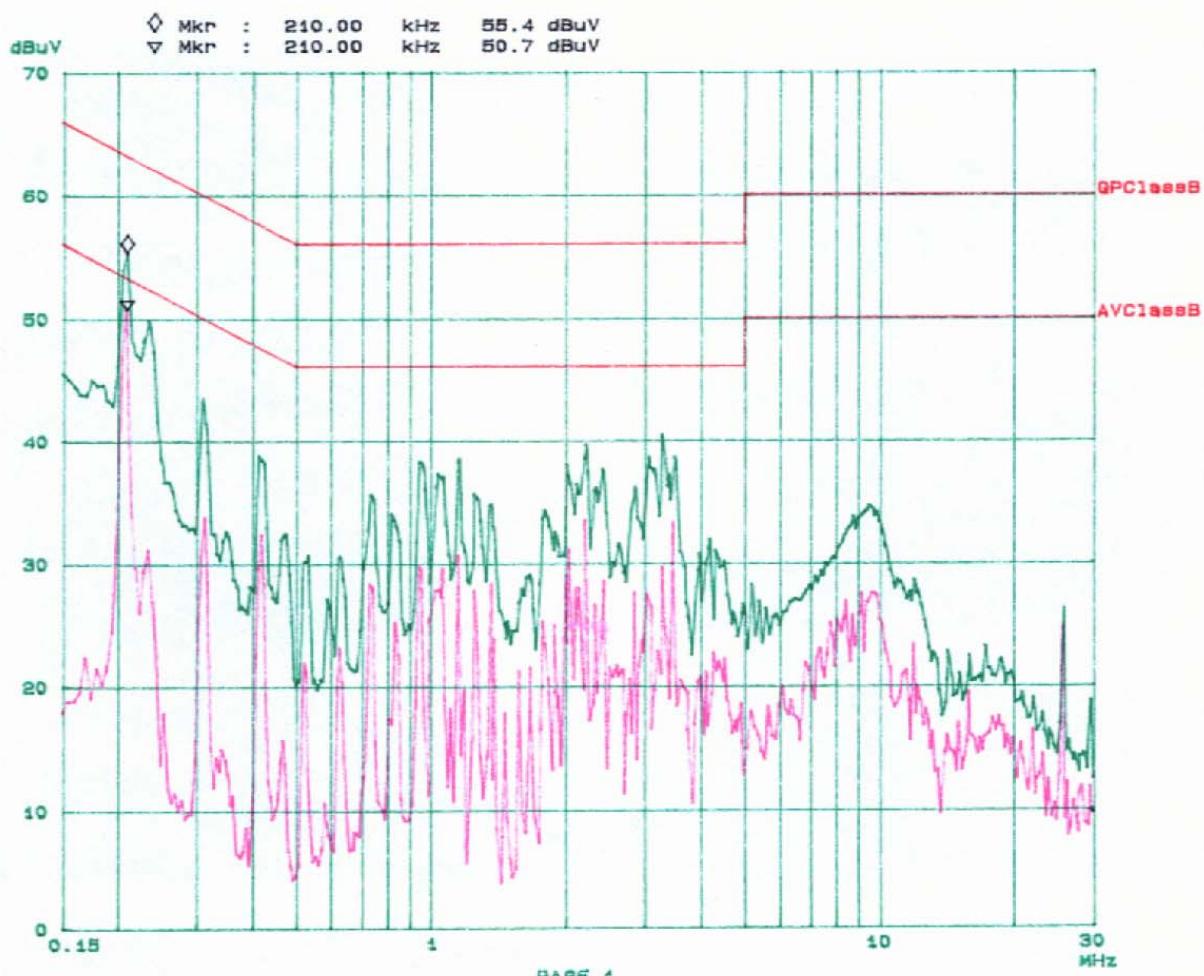

Bay Area Compliance Laboratory Corp  
Class B


25. Jan 06 20:18

EUT: PinPad MIT-2000  
Manuf: MorningIT  
Op Cond: Normal  
Operator: OSCAR  
Comment: L  
120VAC  
File name:

WA  
1/25/06

## Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	15dBLLN	OFF
1M	5M	10k	9k	QP+AV	1ms	15dBLLN	OFF
5M	30M	100k	9k	QP+AV	1ms	15dBLLN	OFF

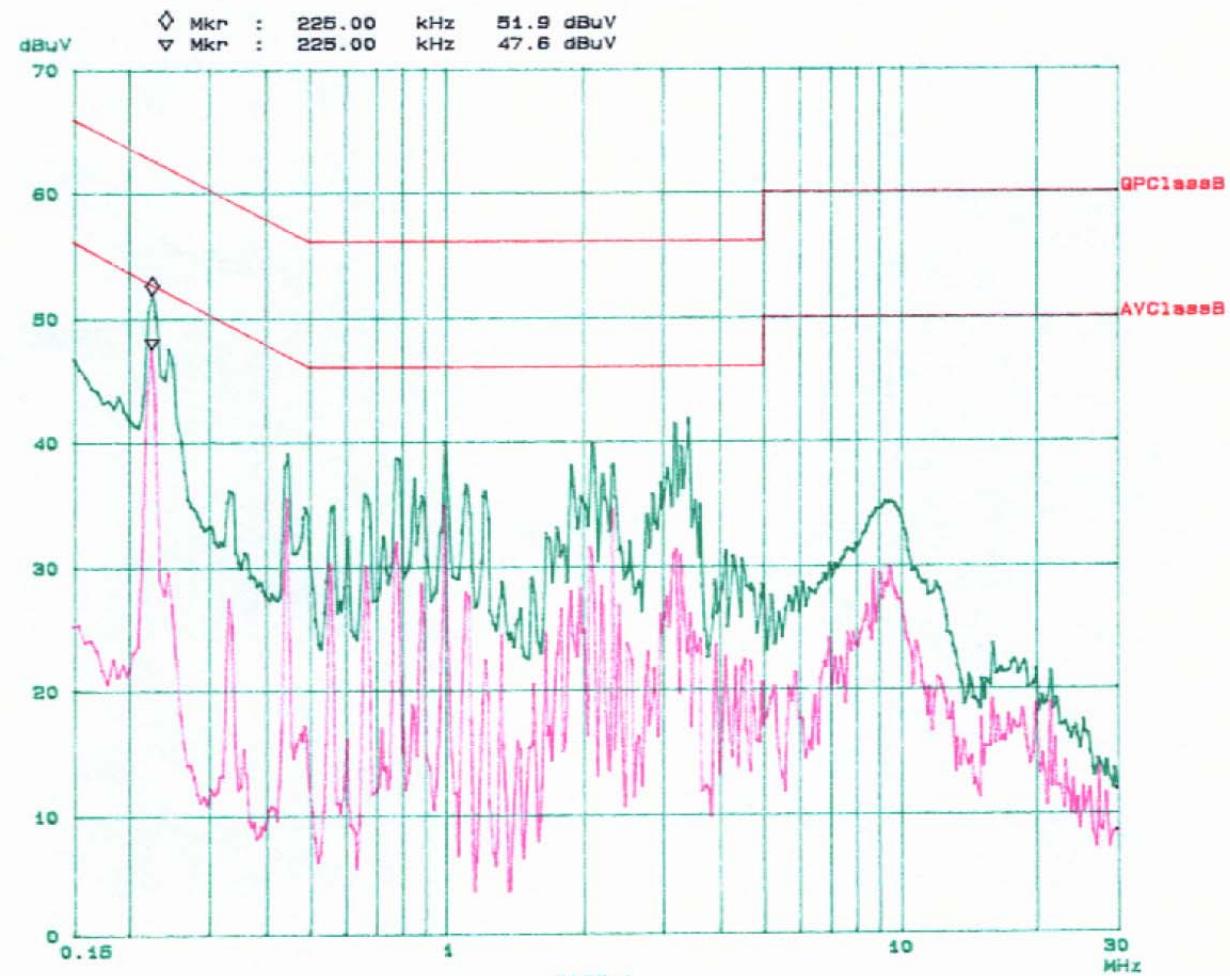

## §15.109 - RADIATED EMISSIONS

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are receiver, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMI Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is  $\pm 4.0$  dB.

### EUT Setup

The radiated emission tests were performed in the open area 10-meter test site, using the setup in accordance with the ANSI C63.4-2003. The specification used was the FCC15B limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and bundled as required.

The adapter was connected to 120Vac/60Hz power source.

### Receiver Setup

The system was tested to 1000 MHz.

During the radiated emission test, the receiver was set with the following configurations:

Frequency Range	RBW	Video B/W
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal Date
Agilent	Amplifier, Pre	8447D	2944A10198	2005-08-17
Sunol Science Corp	Combination Antenna	JB1 Antenna	A013105	2005-02-11
Rohde & Schewarz	EMI Test Receiver	ESCI 1166.595 0K03	100044	2005-12-14
Sunol Science Corp	System Controller	SC99V	122303-1	N/R

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

## Test Procedure

For the radiated emissions test, the EUT all support equipment were connected to the AC floor outlet. Maximizing procedure was performed on the six (6) highest emissions in the described configurations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limits), and are distinguished with a "Qp" in the data table.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor, and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

## Summary of Test Results

According to the following table, the EUT complied with the FCC Class B standards and these test results is deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations, and had the worst margin of:

**-5.6 dB at 520.70 MHz** in the **Vertical** polarization , 30 to 1000 MHz

## Environmental Conditions

Temperature:	18 °C
Relative Humidity:	39%
ATM Pressure:	1012mbar

*\*Testing was performed by Oscar Au on 2006-01-18.*

**Radiated Emissions Test Data, Measure at 10 Meter, and convert to 3 Meter**

Frequency	Reading	Direction	Height	Polar	Distance factor	Antenna Factor	Cable loss	Amplifier	Distance factor	Correction Factor	15B	15B
	dBuV	Degree	Meter	H / V	dB	dB/m	dB	dB	dB	dBuV/m	Limit	Margin
520.70	38.7	250	1.0	V	10	18.5	1.7	28.5	10.0	40.4	46.00	-5.6
350.18	40.0	75	1.8	H	10	14.9	1.3	27.3	10.0	38.9	46.00	-7.1
260.10	42.3	280	2.8	H	10	11.7	1.2	27.1	10.0	38.1	46.00	-7.9
455.80	36.4	240	3.1	V	10	17.1	1.6	28.3	10.0	36.8	46.00	-9.2
81.90	39.0	270	1.0	V	10	9.6	0.7	28.5	10.0	30.8	40.00	-9.2
139.60	38.3	270	1.0	V	10	12.9	0.8	28.1	10.0	33.9	43.50	-9.6
210.10	39.5	270	3.2	H	10	10.1	1.0	27.6	10.0	33.0	43.50	-10.5
139.60	37.2	240	3.1	V	10	12.9	0.8	28.1	10.0	32.8	43.50	-10.7
139.60	36.4	250	1.0	H	10	12.9	0.8	28.1	10.0	32.0	43.50	-11.5
279.88	36.8	280	2.8	H	10	12.6	1.2	27.1	10.0	33.5	46.00	-12.5