

HCT CO., LTD.**CERTIFICATE OF COMPLIANCE**
FCC Certification**Applicant Name:**
NEC CASIO Mobile Communications, Ltd.**Date of Issue:**

August 06, 2012


Address:
1753 Shimonumabe, Nakahara-ku, Kawasaki,
Kanagawa 211-8666 Japan**Test Site/Location:**HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,
Icheon-si, Kyunggi-Do, Korea**Report No.:** HCTR1208FR05
HCT FRN: 0005866421**FCC ID** : TYK-JDS9507**APPLICANT** : NEC CASIO Mobile Communications, Ltd.**FCC Model(s):** C811**EUT Type:** CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC**Max. RF Output Power:** 2.08 dBm (1.61 mW)**Frequency Range:** 2402 MHz -2480 MHz(BT 4.0_Low Energy Mode)**Modulation type** GFSK**FCC Classification:** Digital Transmission System(DTS)**FCC Rule Part(s):** Part 15.247**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Jong Seok Lee**Report prepared by**
: Jong Seok Lee

Test engineer of RF Team

**Approved by**
: Sang Jun Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1208FR05	August 06, 2012	- First Approval Report

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC	FCC ID : TYK-JDS9507

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	7
7. SUMMARY TEST OF RESULTS	8
8. TEST RESULT	9
8.1 6dB BANDWIDTH MEASUREMENT	9
8.2 OUTPUT POWER MEASUREMENT	13
8.3 POWER SPECTRAL DENSITY	19
8.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ...	23
8.5 RADIATED MEASUREMENT	29
8.5.1 RADIATED SPURIOUS EMISSIONS	29
8.5.2 RADIATED RESTRICTED BAND EDGES	43
8.6 POWERLINE CONDUCTED EMISSIONS	64
9. LIST OF TEST EQUIPMENT	69

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

1. GENERAL INFORMATION

Applicant: NEC CASIO Mobile Communications, Ltd.
Address: 1753 Shimonumabe, Nakahara-ku, Kawasaki, Kanagawa 211-8666 Japan
FCC ID: TYK-JDS9507
EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC
Model name(s): C811
Date(s) of Tests: July 02, 2012 ~ July 19, 2012
Place of Tests: HCT Co., Ltd.
 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.

2. EUT DESCRIPTION

EUT Type	CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC	
FCC Model Name	C811	
Power Supply	DC 3.7 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX: 2402 MHz ~ 2480 MHz RX: 2402 MHz ~ 2480 MHz	
Max. RF Output Power	Peak	2.08 dBm (1.6144 mW)
	Average	-1.22 dBm (0.7551 mW)
BT Operating Mode	BT 4.0_Low Energy Mode	
Modulation Type	GFSK	
Number of Channels	40 Channels	
Antenna Specification	Manufacturer: ARRO Antenna type: SUB Antenna Peak Gain : -0.6 dBi	

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC	FCC ID : TYK-JDS9507

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507



6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted < 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.6		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.5.2		PASS

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

8. TEST RESULT


8.1 6dB BANDWIDTH MEASUREMENT

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION



■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW = 1 – 5 % of the EBW

VBW = 3 * RBW

SPAN = 5 MHz

Detector = Peak

Trace mode = max hold

Sweep = auto couple

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

█ TEST RESULTS

Conducted 6dB Bandwidth Measurements

LE Mode		Measured Bandwidth [kHz]	Minimum Bandwidth [kHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2402	0	637.4	500	Pass
2440	19	638.9	500	Pass
2480	39	638.2	500	Pass

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

RESULT PLOTS

6dB Bandwidth plot (Low-CH 0)



6dB Bandwidth plot (Mid-CH 19)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

6dB Bandwidth plot (High-CH 39)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

8.2 OUTPUT POWER MEASUREMENT


Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

█ TEST CONFIGURATION



█ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to 718828 DTS Measurement Guidance DR01.

This EUT TX condition is actual operating mode(not near 100 % duty cycle) by WLAN test program.

The Spectrum Analyzer is set to

- Peak Power(Measurement Procedure PK2 in KDB 558074)

RBW = 1 MHz

VBW = 3 MHz

SPAN = 5 – 30 % greater than the EBW

Detector Mode = Peak

Integrated bandwidth = EBW

Sweep = auto couple

Trace Mode = max hold

- Average Power(Measurement Procedure AVG2 in KDB 558074)

RBW = 1 MHz

VBW = 3 MHz

SPAN = 5 – 30 % greater than the EBW

Detector Mode = power averaging(RMS) or sample

Integrated bandwidth = EBW

Sweep = auto couple

Sweep Point = 1001

Trace average at least 100 traces in power averaging(RMS) mode

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		

□ Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea)
= 10 dBm + 10 dB + 0.8 dB = 20.8 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the Attenuator and cable combination is 11 dB at 2.4 GHz. We used the particular cable type that is supported by manufacturer.

□ TEST RESULTS-Peak

Conducted Output Power Measurements

LE Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2402	0	2.08	30
2440	19	1.99	30
2480	39	0.90	30

□ TEST RESULTS-Average


Conducted Output Power Measurements

LE Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2402	0	-1.22	30
2440	19	-1.30	30
2480	39	-2.40	30


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

□ RESULT PLOTS-Peak

Conducted Output Power (Low-CH 0)

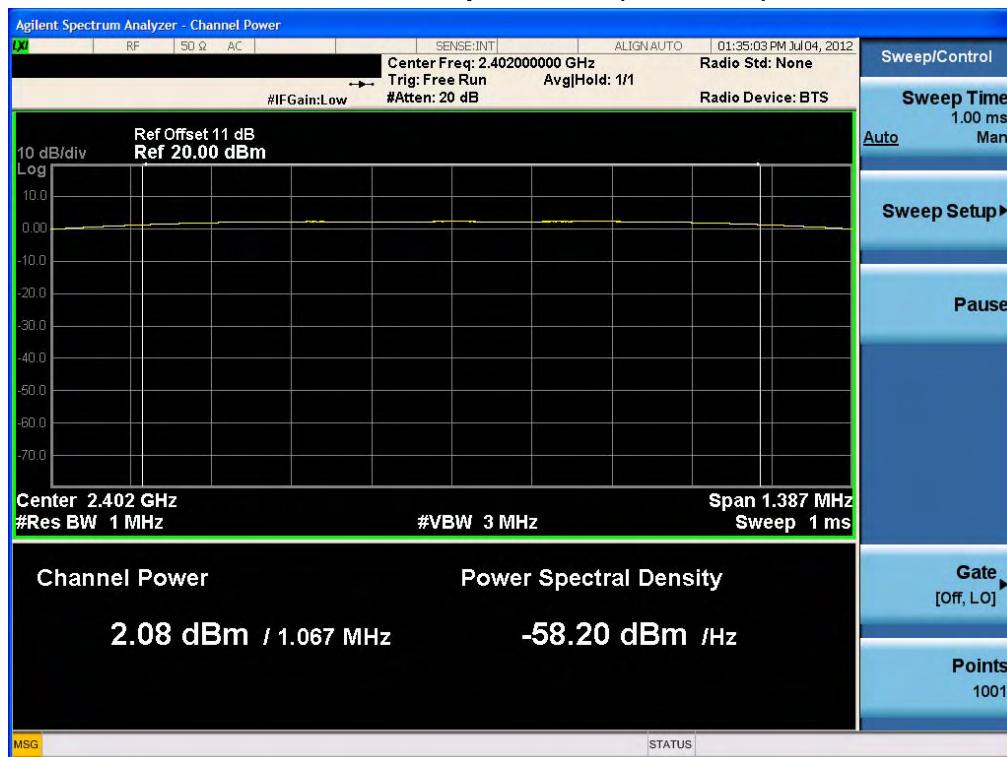

Conducted Output Power (Mid-CH 19)

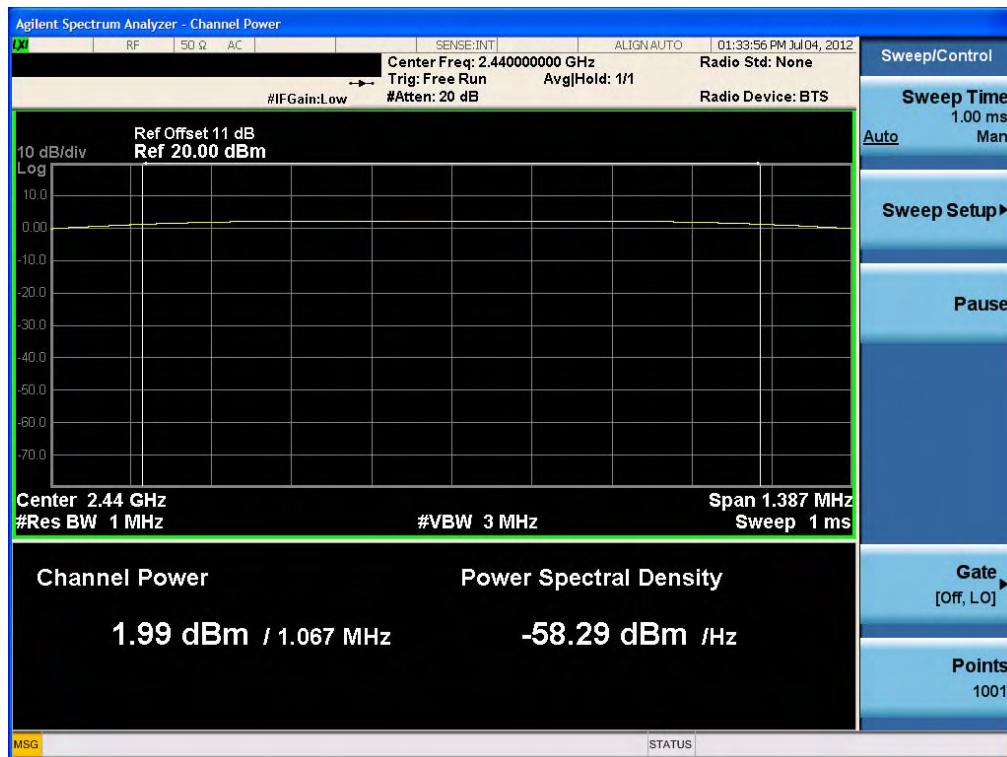

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Conducted Output Power (High-CH 39)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

□ RESULT PLOTS-Average

Conducted Output Power (Low-CH 0)



Conducted Output Power (Mid-CH 19)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Conducted Output Power (High-CH 39)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507


8.3 POWER SPECTRAL DENSITY

Test Requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

■ TEST CONFIGURATION



■ TEST PROCEDURE

We tested according to KDB 558074(issued 1/18/2012).

The spectrum analyzer is set to :

1. Span = 5 – 30 % greater than the EBW
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Sweep = Auto couple
5. Detector Mode = Peak
6. Trace Mode = Max hold
7. Search peak

■ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea) + BWCF

Output Power = -5 dBm + 10 dB + 0.8 dB –15.2 dB= 0.6 dBm

Where: BWCF(Bandwidth Correction Factor) = $10\log(3 \text{ kHz}/100 \text{ kHz}) = -15.2 \text{ dB}$

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the Attenuator and cable combination is 11 dB at 2.4 GHz. We used the particular cable type that is supported by manufacturer.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

TEST RESULTS
Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Spectrum Value(dBm)	BWCF (dB)	PSD (dBm)	Limit (dBm)	Pass/ Fail
2402	0	LE	2.058	-15.2	-13.142	8	Pass
2440	19		1.977	-15.2	-13.223	8	Pass
2480	39		0.897	-15.2	-14.303	8	Pass

Note : PSD = Spectrum Value + BWCF

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

RESULT PLOTS

Power Spectral Density (Low-CH 0)




Power Spectral Density (Mid-CH 19)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Power Spectral Density (High-CH 39)

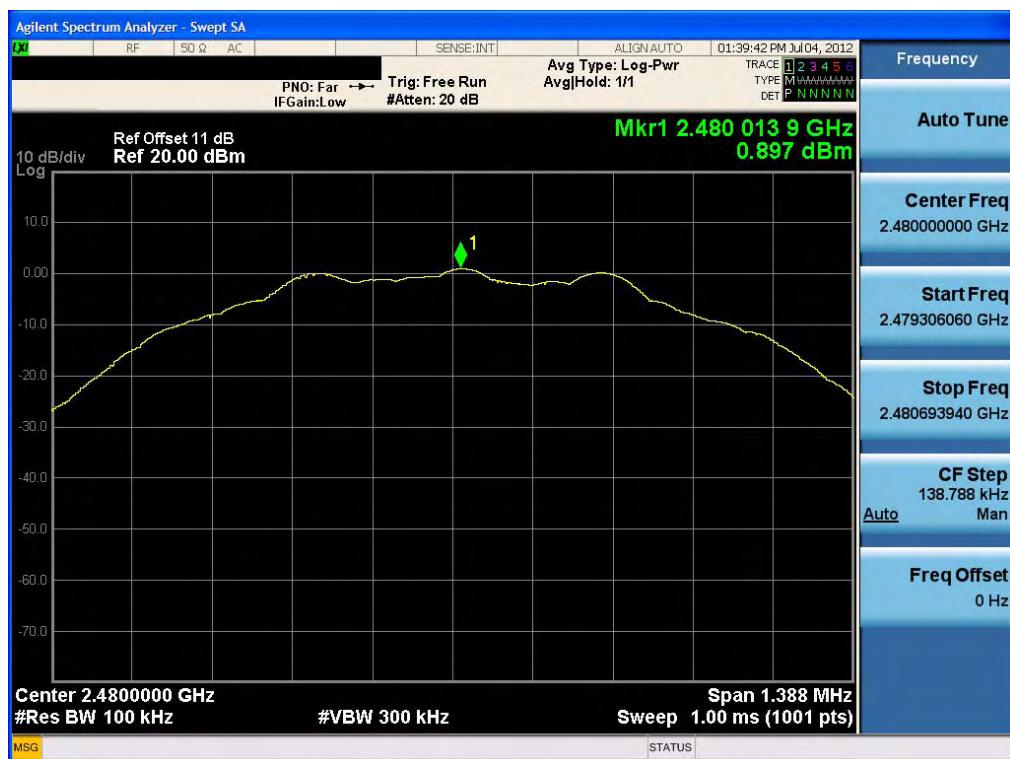

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507


8.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 20 dBc

█ TEST CONFIGURATION



█ TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer.

RBW = 100 kHz(Upon 1 GHz = 1 MHz)

VBW = 300 kHz(Upon 1 GHz = 1 MHz)

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep = auto couple

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the Attenuator and cable combination is 11 dB at 2.4 GHz. We used the particular cable type that is supported by manufacturer.
4. In case of conducted spurious emissions test, we applied the offset values at 2.4 GHz. Because we used the particular cable type that is supported by manufacturer. So, we don't know exactly cable loss from 30 MHz to 26 GHz.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:		
HCTR1208FR05	August 06, 2012	CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC	FCC ID :	TYK-JDS9507

RESULT PLOTS

BandEdge (Low-CH 0)




BandEdge (High-CH 39)




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 0)

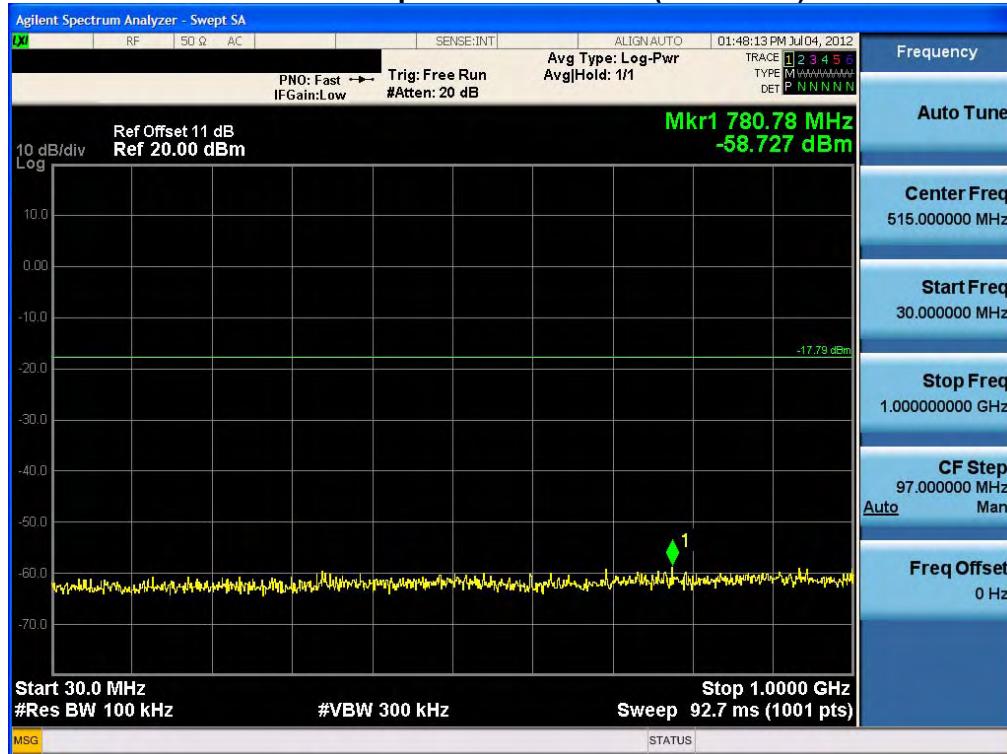

Conducted Spurious Emission (Mid-CH 19)

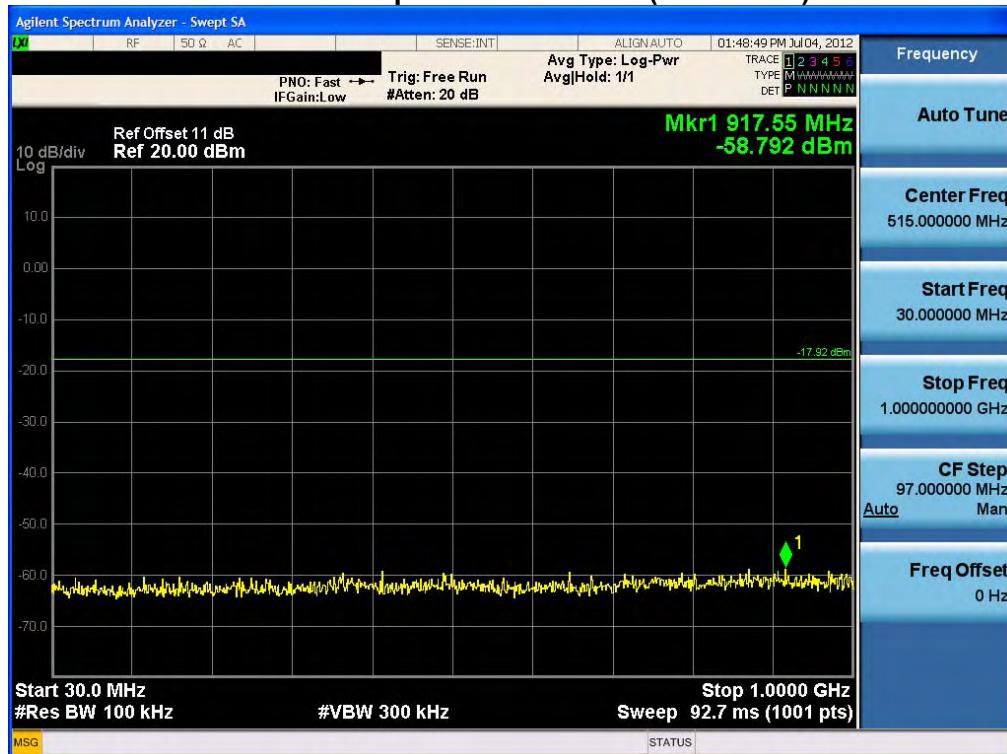

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Conducted Spurious Emission (High-CH 39)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

1 GHz ~ 26 GHz

Conducted Spurious Emission (Low-CH 0)



Conducted Spurious Emission (Mid-CH 19)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Conducted Spurious Emission (High-CH 39)



FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

8.5 RADIATED MEASUREMENT.

8.5.1 RADIATED SPURIOUS EMISSIONS.


Test Requirements and limit, §15.205, §15.209

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Test Configuration

Below 30 MHz

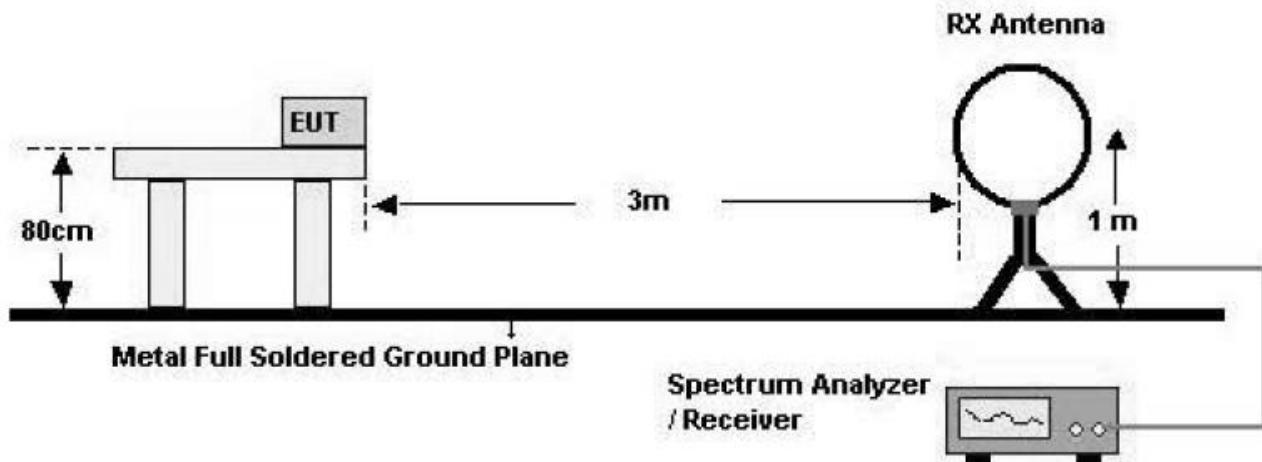


30 MHz - 1 GHz

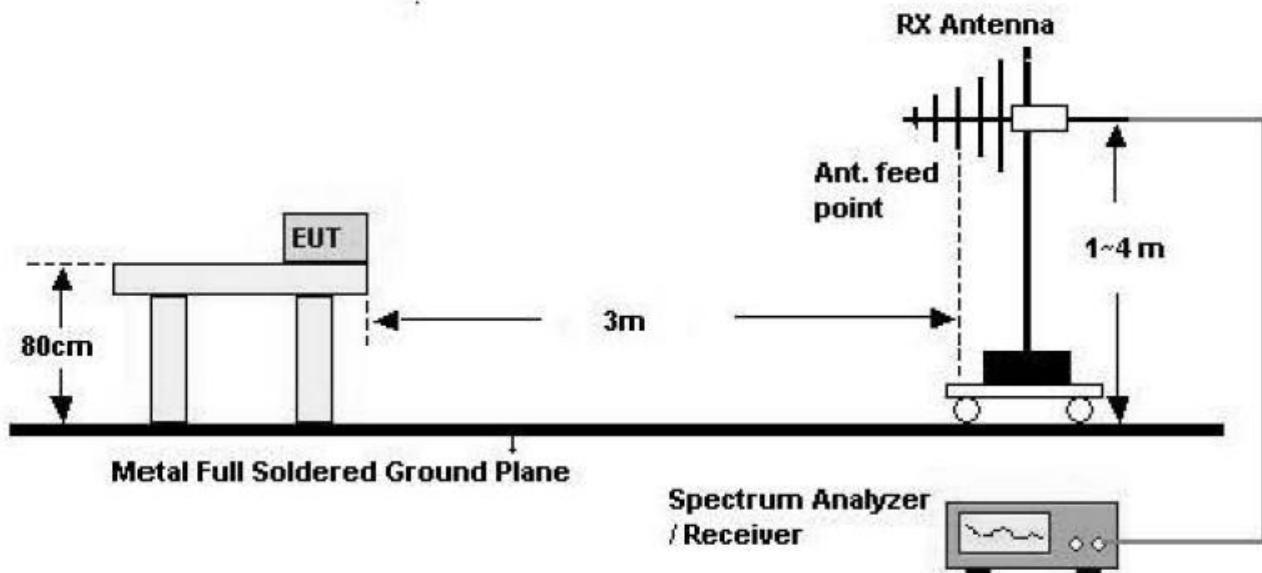

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Above 1 GHz

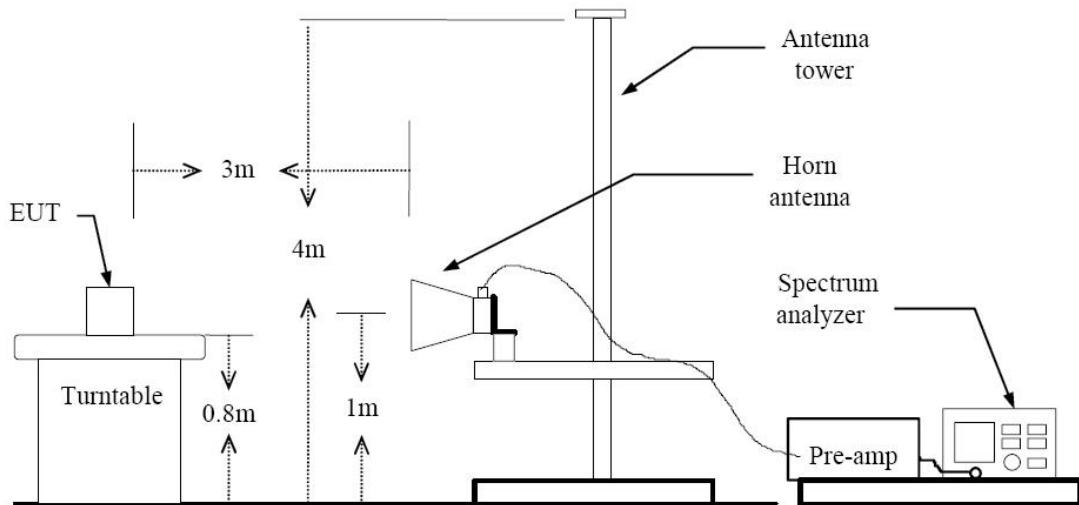

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ N	dB /m	dB	(H/V)	dB μ N/m	dB μ N/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			FCC ID : TYK-JDS9507

Above 1 GHz

Normal Battery Cover

Operation Mode: CH Low(LE Mode)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	49.17	-0.20	V	48.97	74	25.03	PK
4804	36.17	-0.20	V	35.97	54	18.03	AV
7206	47.89	10.34	V	58.23	74	15.77	PK
7206	34.52	10.34	V	44.86	54	9.14	AV
4804	49.24	-0.20	H	49.04	74	24.96	PK
4804	36.58	-0.20	H	36.38	54	17.62	AV
7206	48.54	10.34	H	58.88	74	15.12	PK
7206	34.57	10.34	H	44.91	54	9.09	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC				FCC ID : TYK-JDS9507

Operation Mode: CH Mid(LE Mode)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4880	48.48	0.25	V	48.73	74	25.27	PK
4880	35.86	0.25	V	36.11	54	17.89	AV
7320	47.85	10.01	V	57.86	74	16.14	PK
7320	34.19	10.01	V	44.20	54	9.80	AV
4880	49.05	0.25	H	49.30	74	24.70	PK
4880	35.41	0.25	H	35.66	54	18.34	AV
7320	47.25	10.01	H	57.26	74	16.74	PK
7320	34.17	10.01	H	44.18	54	9.82	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC				FCC ID : TYK-JDS9507

Operation Mode: CH High(LE Mode)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	48.42	0.75	V	49.17	74	24.83	PK
4960	35.08	0.75	V	35.83	54	18.17	AV
7440	47.44	10.11	V	57.55	74	16.45	PK
7440	34.16	10.11	V	44.27	54	9.73	AV
4960	47.73	0.75	H	48.48	74	25.52	PK
4960	35.34	0.75	H	36.09	54	17.91	AV
7440	48.24	10.11	H	58.35	74	15.65	PK
7440	34.17	10.11	H	44.28	54	9.72	AV

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC				FCC ID : TYK-JDS9507

Extended Battery Cover

Operation Mode: CH Low(LE Mode)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	49.52	-0.2	V	49.32	74	24.68	PK
4804	36.40	-0.2	V	36.20	54	17.80	AV
7206	48.11	10.34	V	58.45	74	15.55	PK
7206	34.59	10.34	V	44.93	54	9.07	AV
4804	49.35	-0.2	H	49.15	74	24.85	PK
4804	36.23	-0.2	H	36.03	54	17.97	AV
7206	47.84	10.34	H	58.18	74	15.82	PK
7206	34.56	10.34	H	44.90	54	9.10	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC				FCC ID : TYK-JDS9507

Operation Mode: CH Mid(LE Mode)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4880	48.51	0.25	V	48.76	74	25.24	PK
4880	35.50	0.25	V	35.75	54	18.25	AV
7320	47.61	10.01	V	57.62	74	16.38	PK
7320	34.18	10.01	V	44.19	54	9.81	AV
4880	48.73	0.25	H	48.98	74	25.02	PK
4880	35.55	0.25	H	35.80	54	18.20	AV
7320	47.26	10.01	H	57.27	74	16.73	PK
7320	34.21	10.01	H	44.22	54	9.78	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC				FCC ID : TYK-JDS9507

Operation Mode: CH High(LE Mode)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	47.75	0.75	V	48.50	74	25.50	PK
4960	35.02	0.75	V	35.77	54	18.23	AV
7440	47.38	10.11	V	57.49	74	16.51	PK
7440	34.19	10.11	V	44.30	54	9.70	AV
4960	48.47	0.75	H	49.22	74	24.78	PK
4960	35.01	0.75	H	35.76	54	18.24	AV
7440	48.10	10.11	H	58.21	74	15.79	PK
7440	34.18	10.11	H	44.29	54	9.71	AV

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC				FCC ID : TYK-JDS9507



Wireless Battery Cover

Operation Mode: CH Low(LE Mode)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	49.45	-0.2	V	49.25	74	24.75	PK
4804	36.35	-0.2	V	36.15	54	17.85	AV
7206	47.75	10.34	V	58.09	74	15.91	PK
7206	34.44	10.34	V	44.78	54	9.22	AV
4804	49.64	-0.2	H	49.44	74	24.56	PK
4804	36.38	-0.2	H	36.18	54	17.82	AV
7206	48.69	10.34	H	59.03	74	14.97	PK
7206	34.44	10.34	H	44.78	54	9.22	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC				FCC ID : TYK-JDS9507

Operation Mode: CH Mid(LE Mode)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4880	48.58	0.25	V	48.83	74	25.17	PK
4880	35.55	0.25	V	35.80	54	18.20	AV
7320	46.72	10.01	V	56.73	74	17.27	PK
7320	34.16	10.01	V	44.17	54	9.83	AV
4880	48.47	0.25	H	48.72	74	25.28	PK
4880	35.57	0.25	H	35.82	54	18.18	AV
7320	46.91	10.01	H	56.92	74	17.08	PK
7320	34.12	10.01	H	44.13	54	9.87	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC				FCC ID : TYK-JDS9507

Operation Mode: CH High(LE Mode)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	48.08	0.75	V	48.83	74	25.17	PK
4960	35.16	0.75	V	35.91	54	18.09	AV
7440	47.30	10.11	V	57.41	74	16.59	PK
7440	34.21	10.11	V	44.32	54	9.68	AV
4960	48.31	0.75	H	49.06	74	24.94	PK
4960	35.40	0.75	H	36.15	54	17.85	AV
7440	47.73	10.11	H	57.84	74	16.16	PK
7440	34.21	10.11	H	44.32	54	9.68	AV

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr	
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC				FCC ID : TYK-JDS9507

8.5.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Normal Battery Cover

Operation Mode	BT 4.0_LE
Operating Frequency	2402 MHz, 2480 MHz
Channel No	0 Ch, 39 Ch

Frequency [MHz]	*Fund. Reading dBuV	* A.F.+CL [dB]	Ant. Pol. [H/V]	*Fundamental [dBuV/m]	Delta Value [dBuV/m]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	62.44	33.86	H	96.30	43.79	52.51	74	21.49	PK
2390.0	43.02	33.86	H	76.88	43.79	33.09	54	20.91	AV
2390.0	61.78	33.86	V	95.64	43.07	52.57	74	21.43	PK
2390.0	42.59	33.86	V	76.45	43.07	33.38	54	20.62	AV
2483.5	61.15	34.02	H	95.17	45.98	49.19	74	24.81	PK
2483.5	42.07	34.02	H	76.09	45.98	30.11	54	23.89	AV
2483.5	59.40	34.02	V	93.42	44.82	48.60	74	25.40	PK
2483.5	41.10	34.02	V	75.12	44.82	30.30	54	23.70	AV

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr	
Test Report No. HCTR1208FR05		Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC				

Extended Battery Cover

Operation Mode	BT 4.0_LE								
Operating Frequency	2402 MHz, 2480 MHz								
Channel No	0 Ch, 39 Ch								

Frequency [MHz]	*Fund. Reading dBuV	* A.F.+CL [dB]	Ant. Pol. [H/V]	*Fundamental [dBuV/m]	Delta Value [dBuV/m]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	62.06	33.86	H	95.92	42.57	53.35	74	20.65	PK
2390.0	42.75	33.86	H	76.61	42.57	34.04	54	19.96	AV
2390.0	62.76	33.86	V	96.62	43.78	52.84	74	21.16	PK
2390.0	43.24	33.86	V	77.10	43.78	33.32	54	20.68	AV
2483.5	61.13	34.02	H	95.15	46.21	48.94	74	25.06	PK
2483.5	42.19	34.02	H	76.21	46.21	30.00	54	24.00	AV
2483.5	59.77	34.02	V	93.79	45.81	47.98	74	26.02	PK
2483.5	41.31	34.02	V	75.33	45.81	29.52	54	24.48	AV

Wireless Battery Cover

Operation Mode	BT 4.0_LE								
Operating Frequency	2402 MHz, 2480 MHz								
Channel No	0 Ch, 39 Ch								

Frequency [MHz]	*Fund. Reading dBuV	* A.F.+CL [dB]	Ant. Pol. [H/V]	*Fundamental [dBuV/m]	Delta Value [dBuV/m]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	61.04	33.86	H	94.90	42.00	52.90	74	21.10	PK
2390.0	42.12	33.86	H	75.98	42.00	33.98	54	20.02	AV
2390.0	61.33	33.86	V	95.19	42.66	52.53	74	21.47	PK
2390.0	42.26	33.86	V	76.12	42.66	33.46	54	20.54	AV
2483.5	60.59	34.02	H	94.61	45.36	49.25	74	24.75	PK
2483.5	41.83	34.02	H	75.85	45.36	30.49	54	23.51	AV
2483.5	59.41	34.02	V	93.43	44.25	49.18	74	24.82	PK
2483.5	41.03	34.02	V	75.05	44.25	30.80	54	23.20	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss
2. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			FCC ID : TYK-JDS9507

5. Radiated Restricted Band Edge measures by marker-delta method according to ANSI C63.10(version : 2009)
6. This test is performed with hopping off.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
8. Marker-Delta Method

In making radiated band-edge measurements, there can be a problem obtaining meaningful data because a measurement instrument that is tuned to a band-edge frequency may also capture some in-band signals when using the resolution bandwidth (RBW). In an effort to compensate for this problem, the following technique for determining band-edge compliance shall be used.

- a) Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function specified in 6.3 and 6.4, 6.5, or 6.6, as applicable, and the appropriate regulatory requirements for the frequency being measured. and our Rules for the frequency being measured.


For example, for a device operating in the 902-928 MHz band under 47 CFR 15.249, use a 120 kHz RBW with a CISPR QP detector (a peak detector with 100 kHz RBW may alternatively be used). For unlicensed wireless devices operating above 1 GHz, use a 1 MHz RBW, a 1 MHz VBW, and a peak detector as required by 47 CFR 15.35. Repeat the measurement with an average detector (i.e., 1 MHz RBW with 10 Hz VBW). For pulsed emissions, other factors must be included. For example note that radiated measurements of the fundamental emission of a spread spectrum unlicensed wireless device operating under 47 CFR 15.247 are not normally required, but they are necessary in connection with this procedure.

- b) Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to approximately 1% to 5 % of the total span, unless otherwise specified, with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.

- c) Subtract the delta measured in b) from the field strengths measured in a). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance of the restricted bands, described in 5.9.


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Normal Battery Cover
Test Plots (LE)
Fund. (Peak_Horizontal _CH 0)

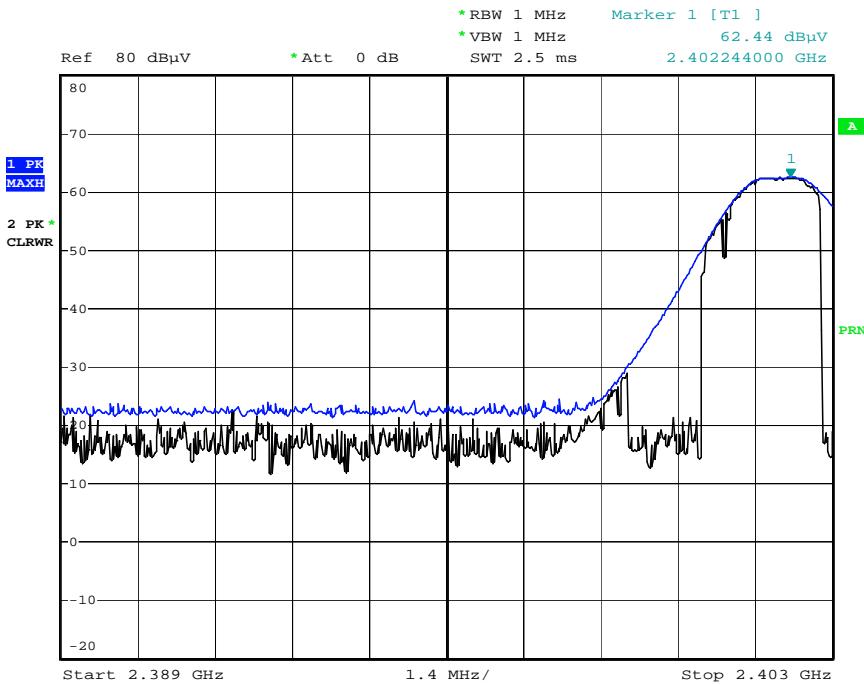

Date: 8.JUL.2012 20:46:50


Fund. (Average_Horizontal _CH 0)

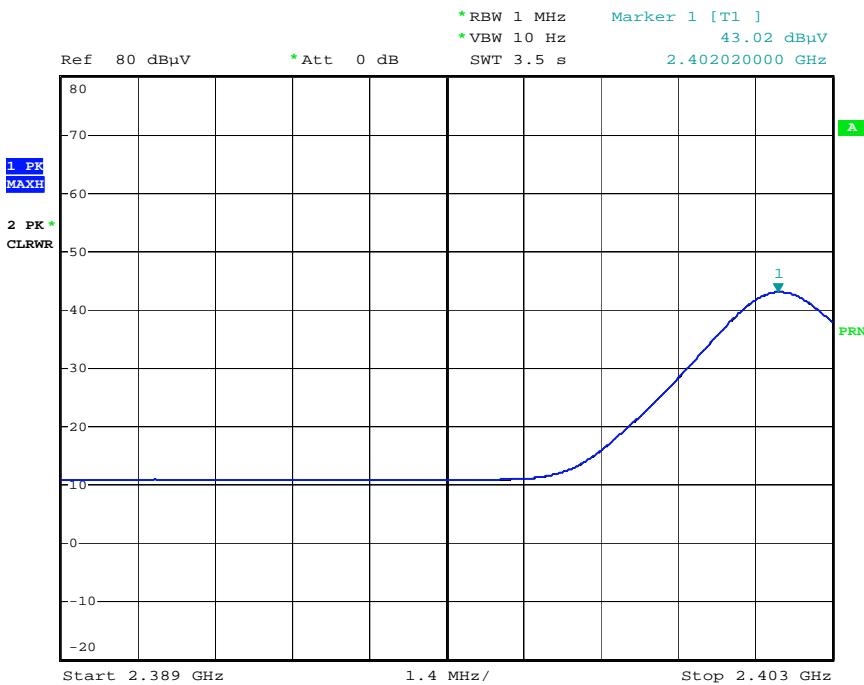

Date: 8.JUL.2012 20:47:21


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Delta (Horizontal _CH 0)

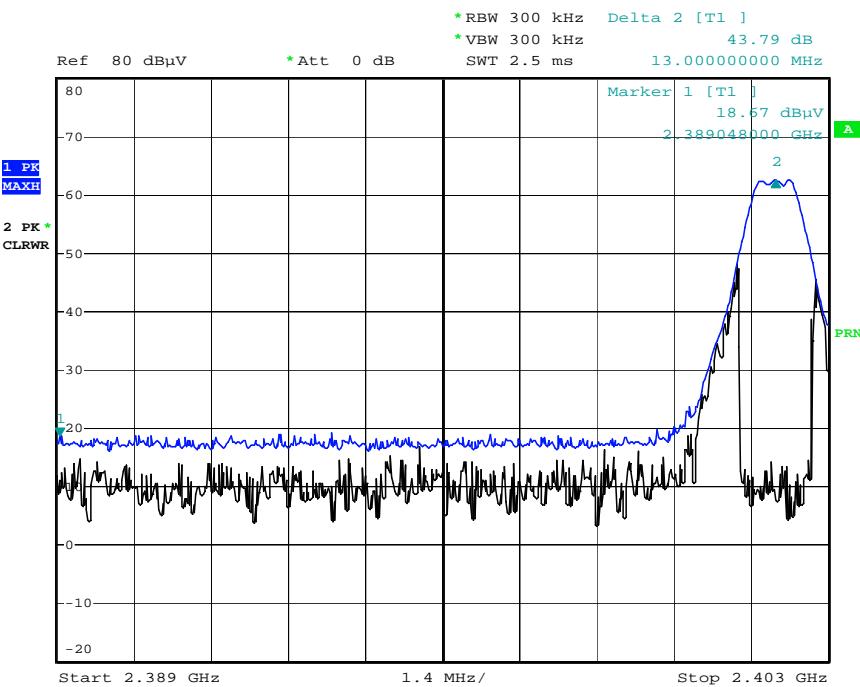

Date: 8.JUL.2012 20:48:27


Fund. (Peak_Vertical_CH 0)

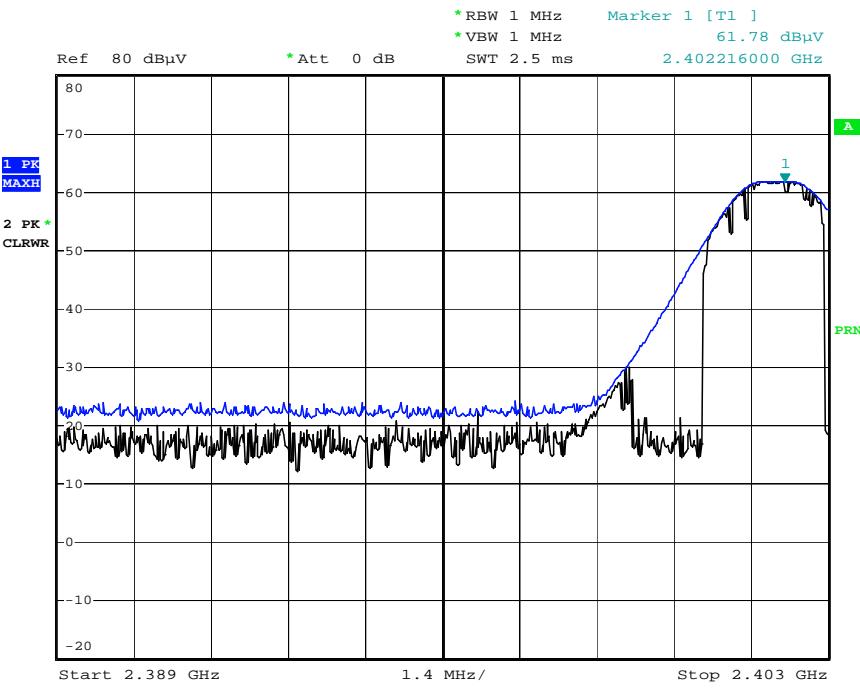

Date: 8.JUL.2012 20:50:12


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Fund. (Average_Verical_CH 0)

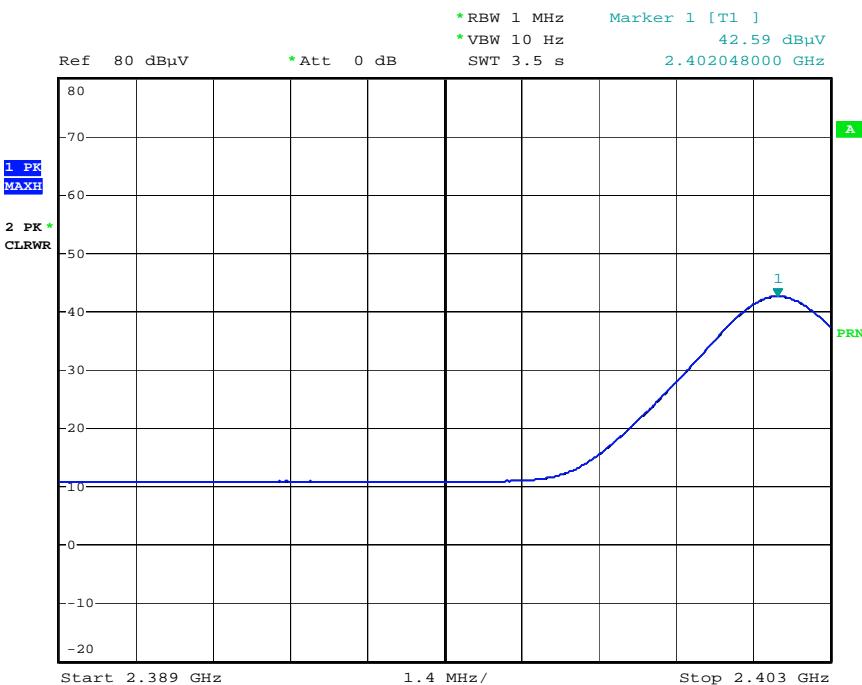

Date: 8.JUL.2012 20:50:37


Delta (Vertical_CH 0)

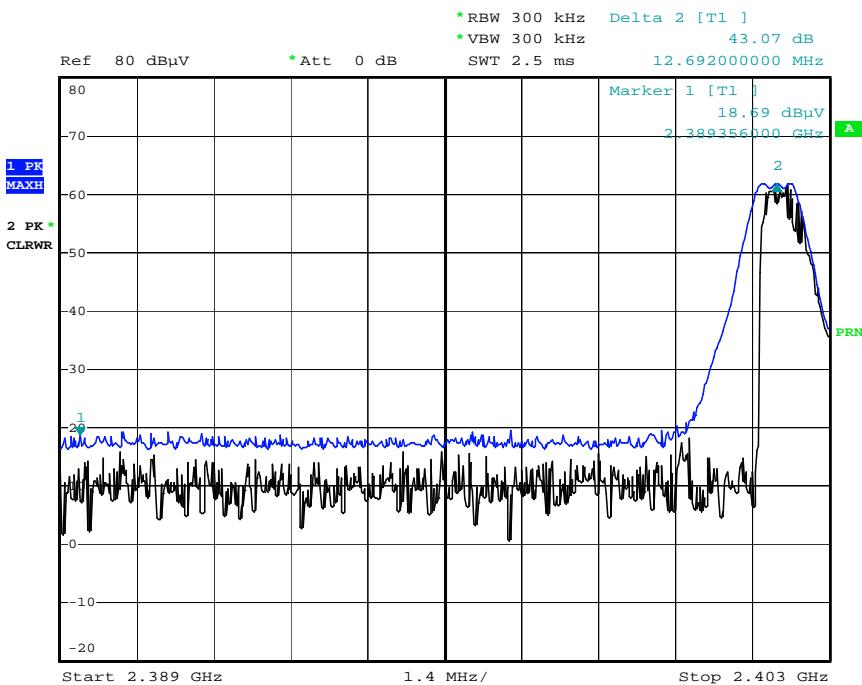

Date: 8.JUL.2012 20:51:33


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Fund. (Peak_Horizontal_CH 38)

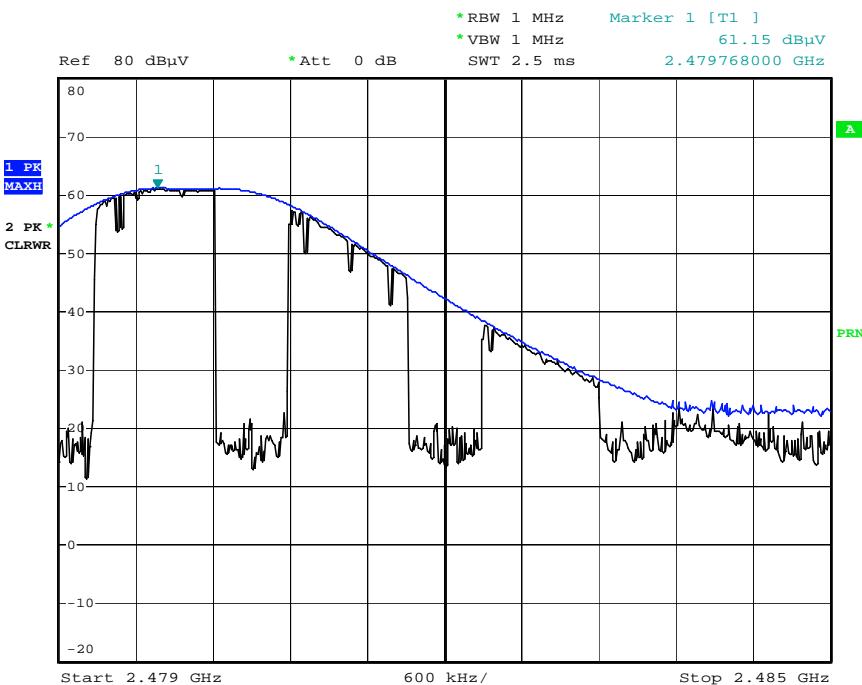

Date: 8.JUL.2012 20:57:36


Fund. (Average_Horizontal_CH 38)

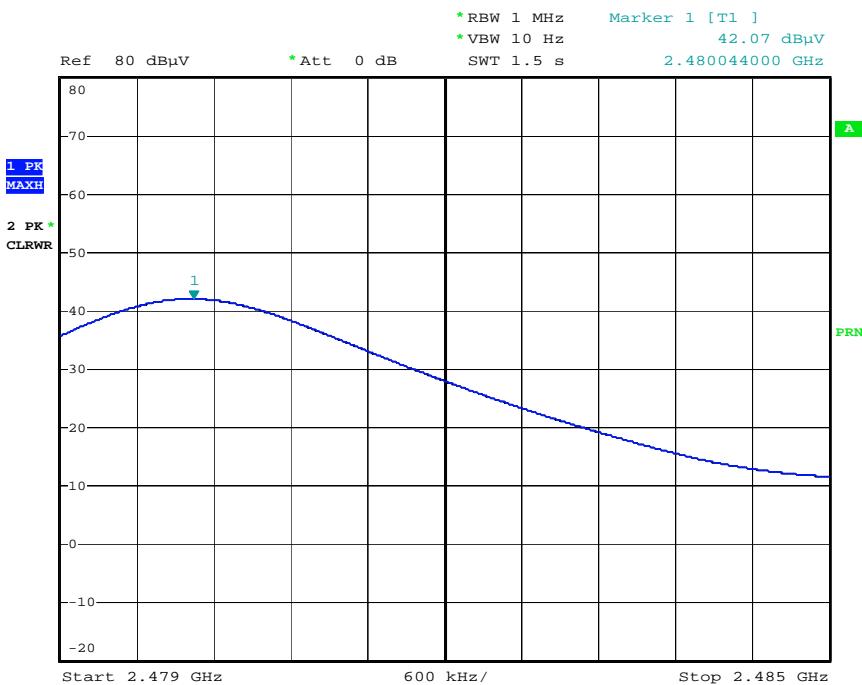

Date: 8.JUL.2012 20:58:00


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Delta (Horizontal_CH 38)

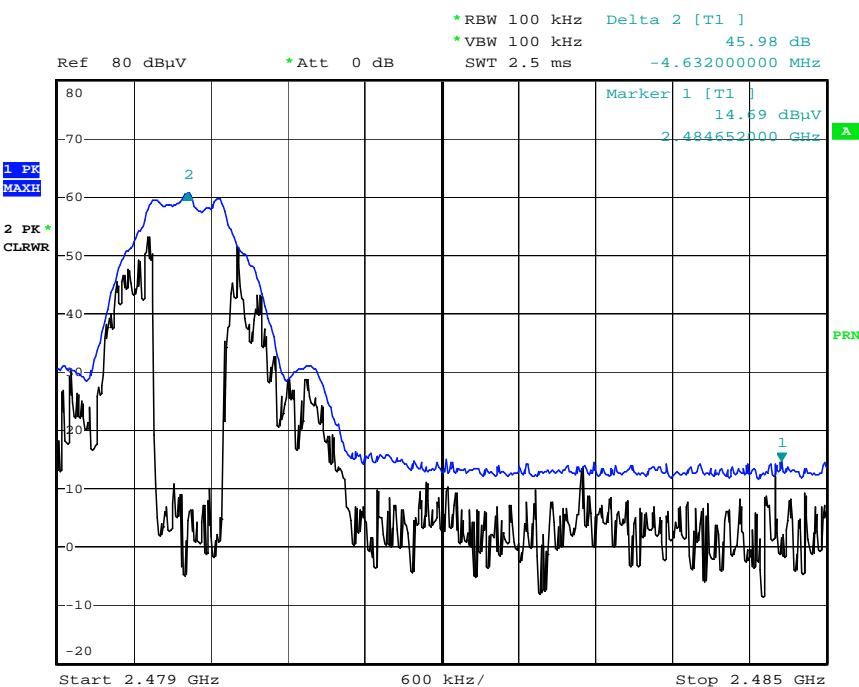

Date: 8.JUL.2012 20:59:18


Fund. (Peak_Vertical_CH 38)

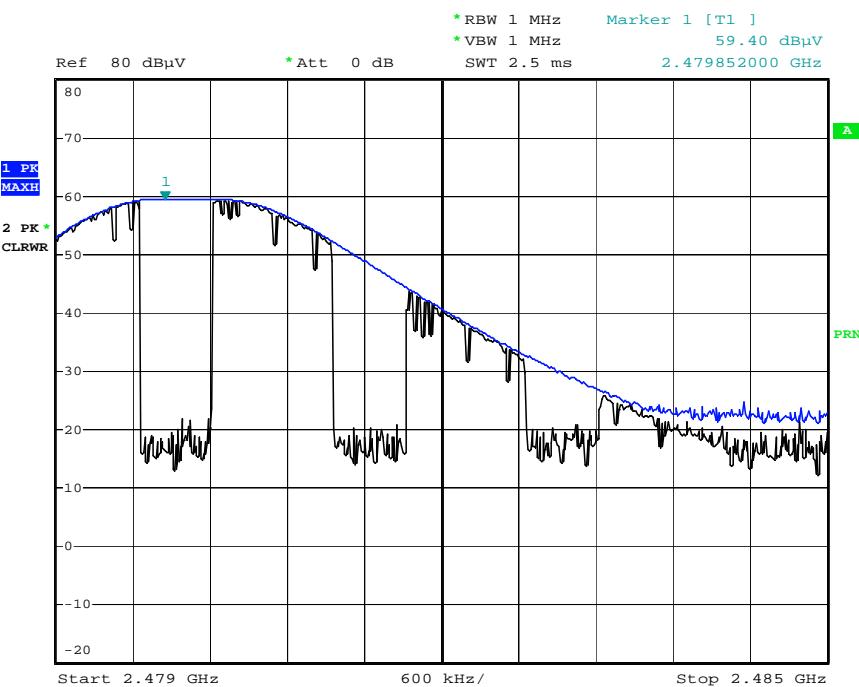

Date: 8.JUL.2012 20:54:13


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			FCC ID : TYK-JDS9507

Fund. (Average_Verical_CH 38)

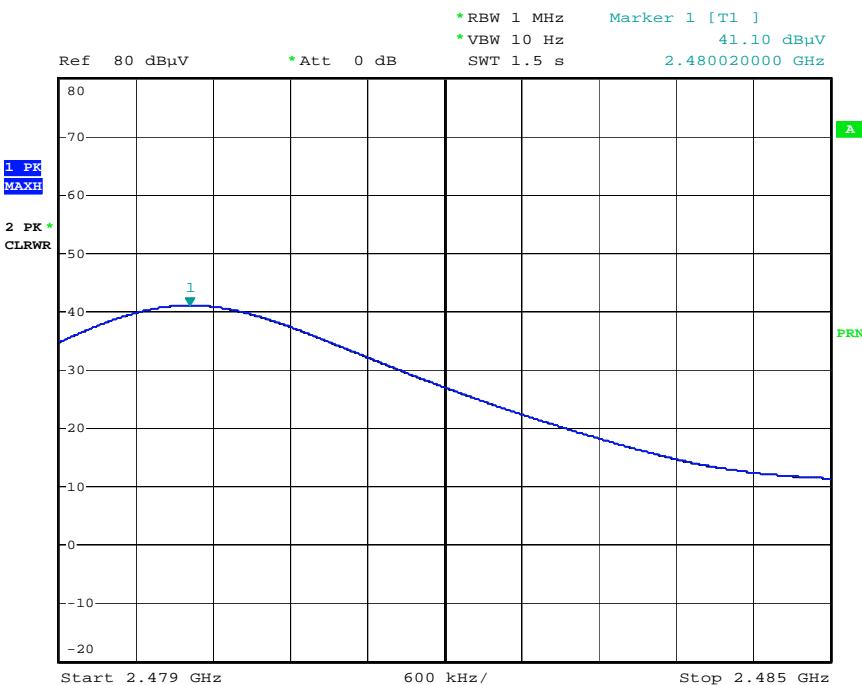

Date: 8.JUL.2012 20:55:01


Delta (Vertical_CH 38)

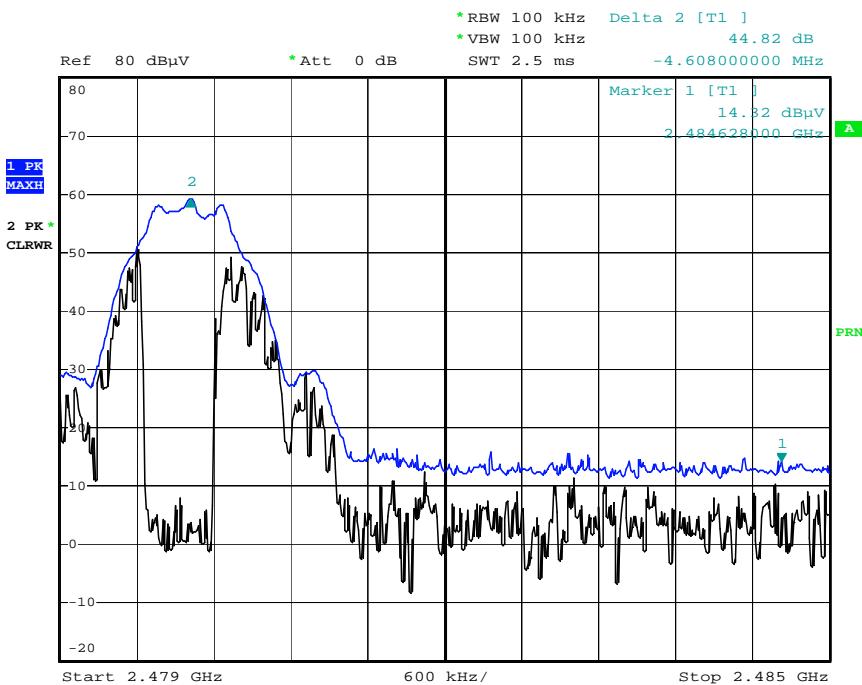

Date: 8.JUL.2012 20:56:05


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Extended Battery Cover
Test Plots (LE)
Fund. (Peak_Horizontal _CH 0)

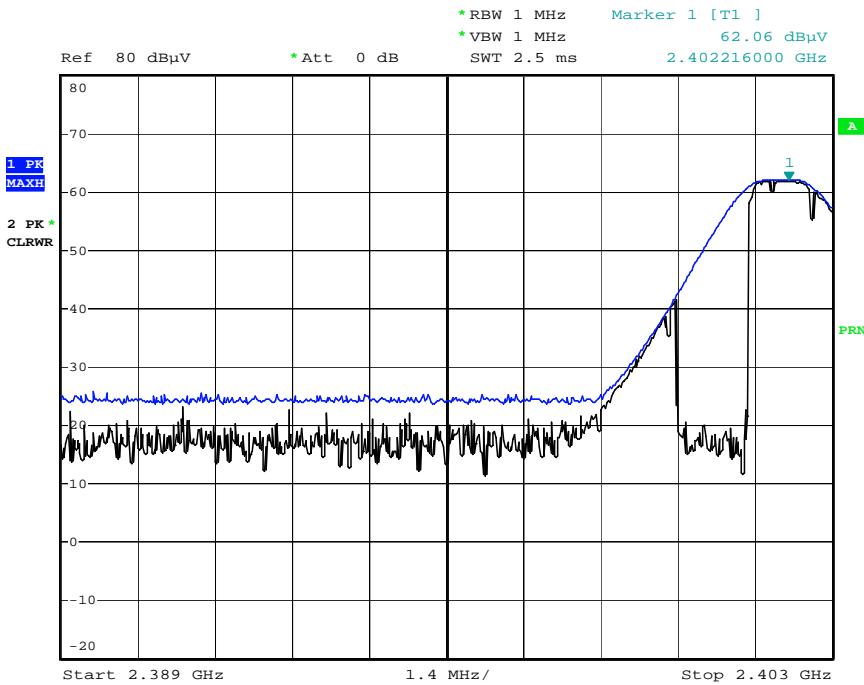

Date: 8.JUL.2012 22:00:23


Fund. (Average_Horizontal _CH 0)

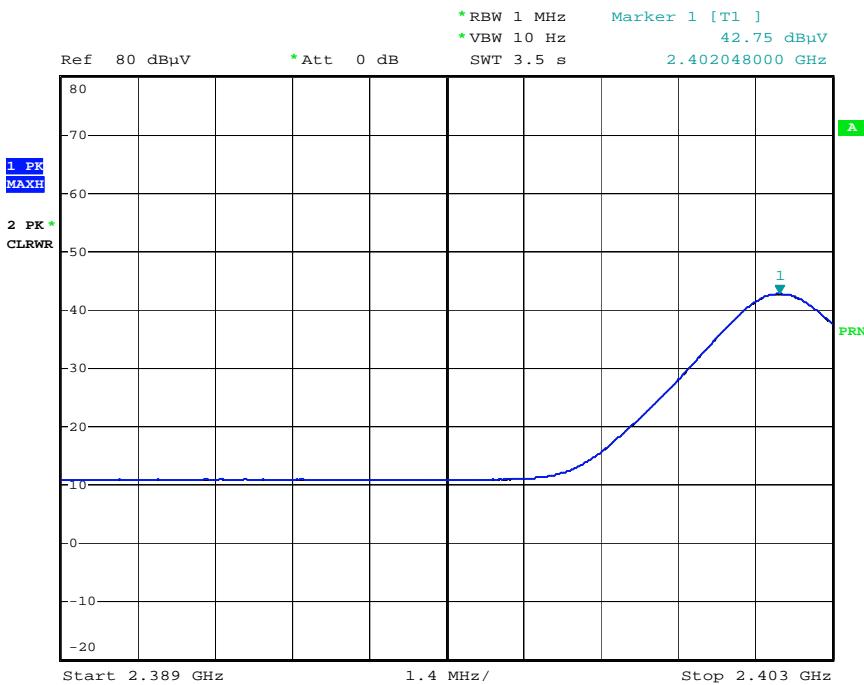

Date: 8.JUL.2012 22:00:59


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Delta (Horizontal _CH 0)

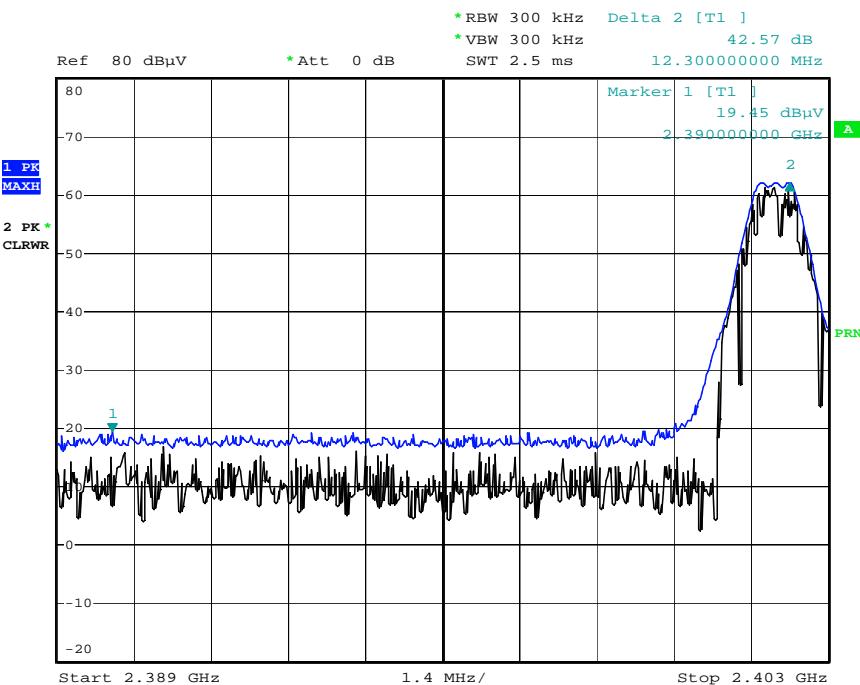

Date: 8.JUL.2012 22:02:11


Fund. (Peak_Vertical_CH 0)

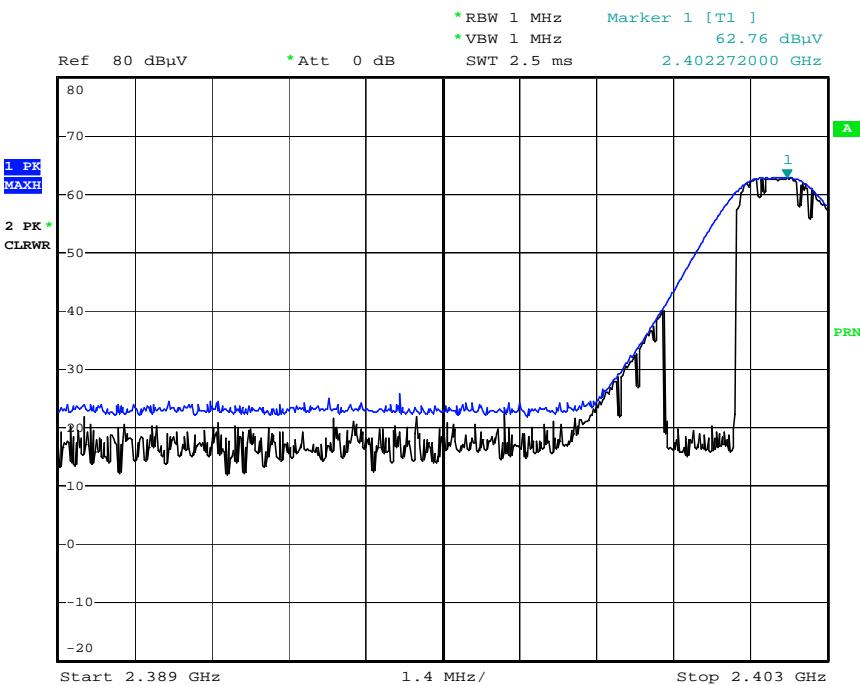

Date: 8.JUL.2012 22:03:47


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Fund. (Average_Verical_CH 0)

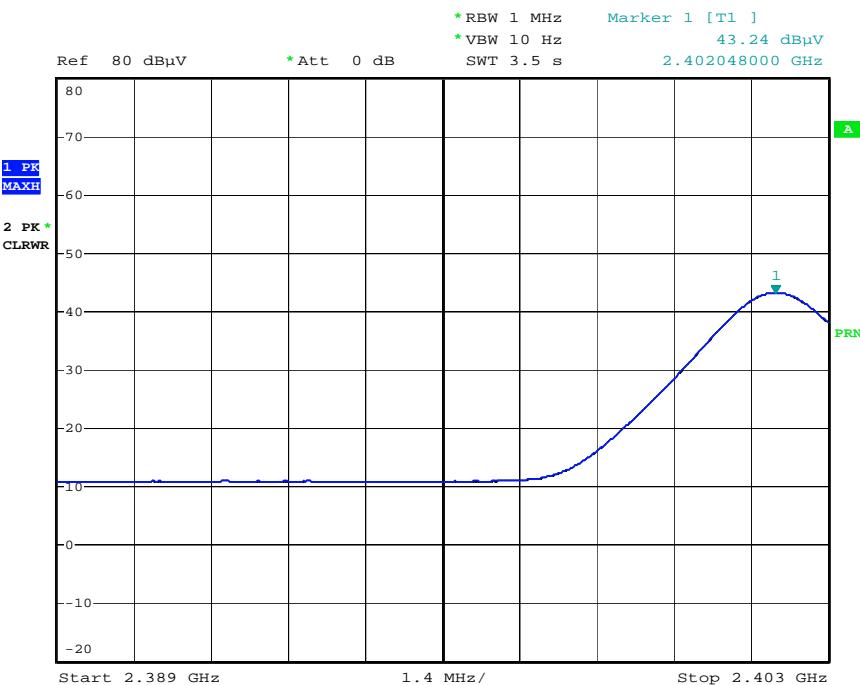

Date: 8.JUL.2012 22:04:16


Delta (Vertical_CH 0)

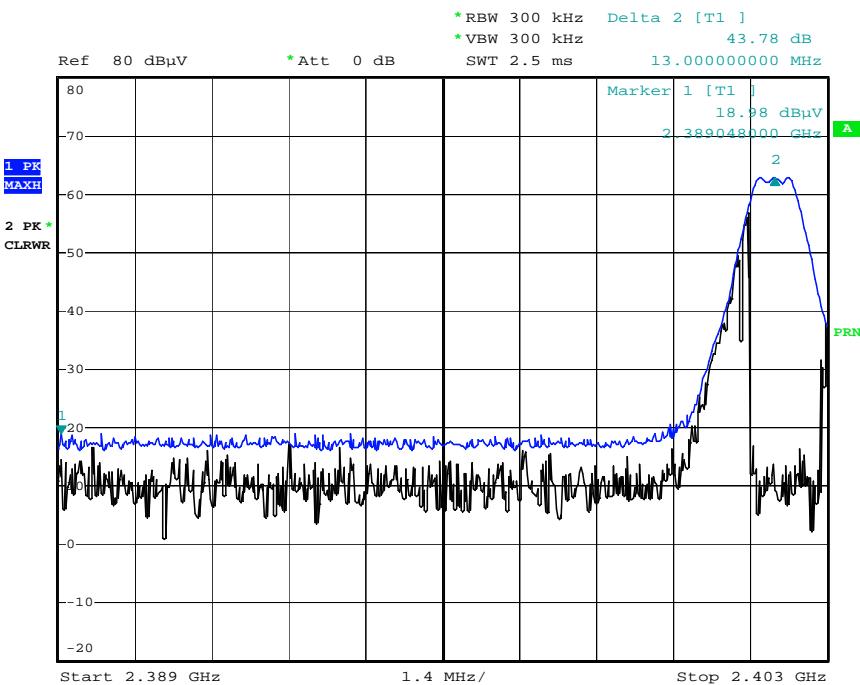

Date: 8.JUL.2012 22:05:06


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Fund. (Peak_Horizontal_CH 38)

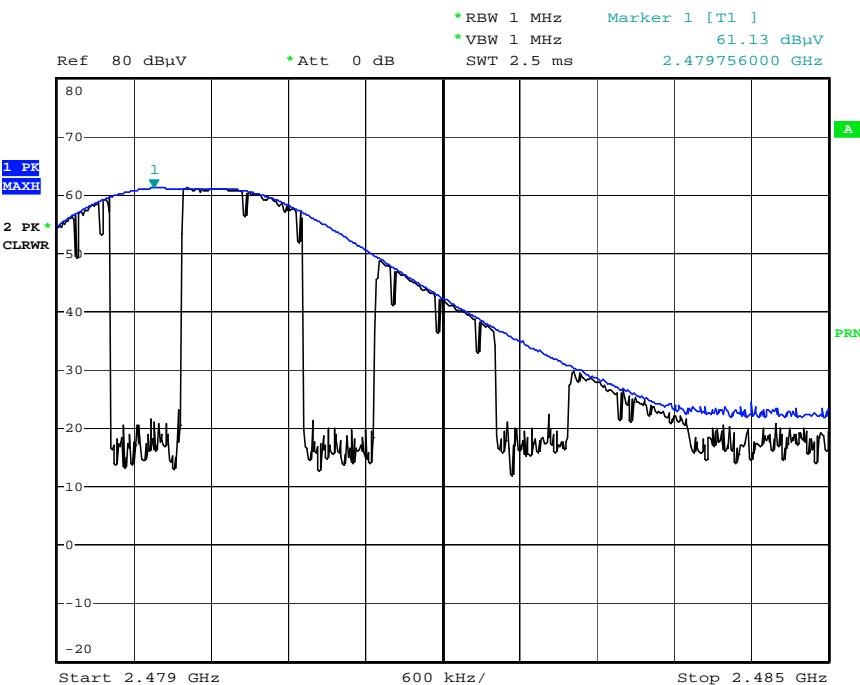

Date: 8.JUL.2012 22:10:31


Fund. (Average_Horizontal_CH 38)

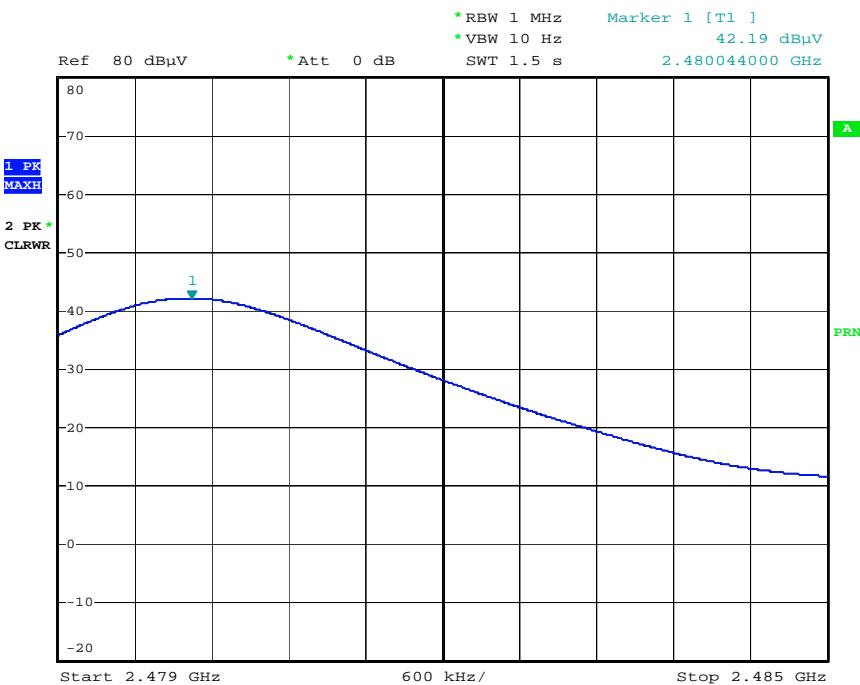

Date: 8.JUL.2012 22:11:00


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Delta (Horizontal_CH 38)

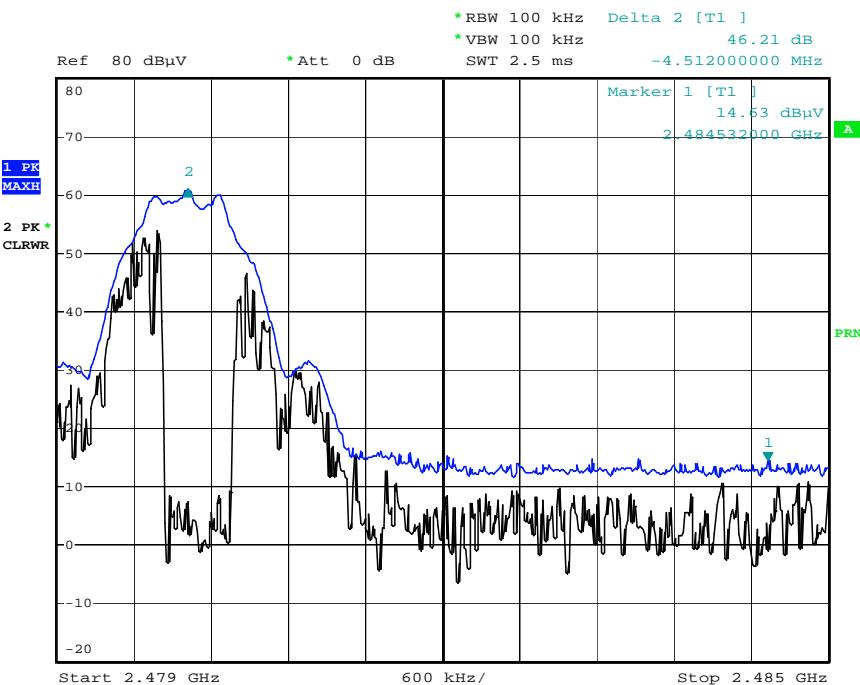

Date: 8.JUL.2012 22:12:07


Fund. (Peak_Vertical_CH 38)

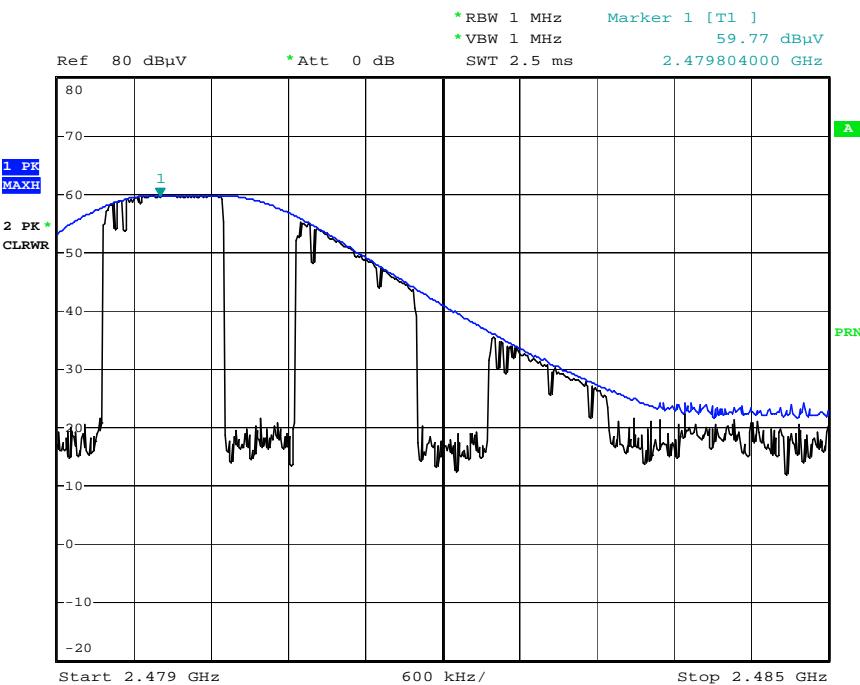

Date: 8.JUL.2012 22:07:20


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Fund. (Average_Verical_CH 38)

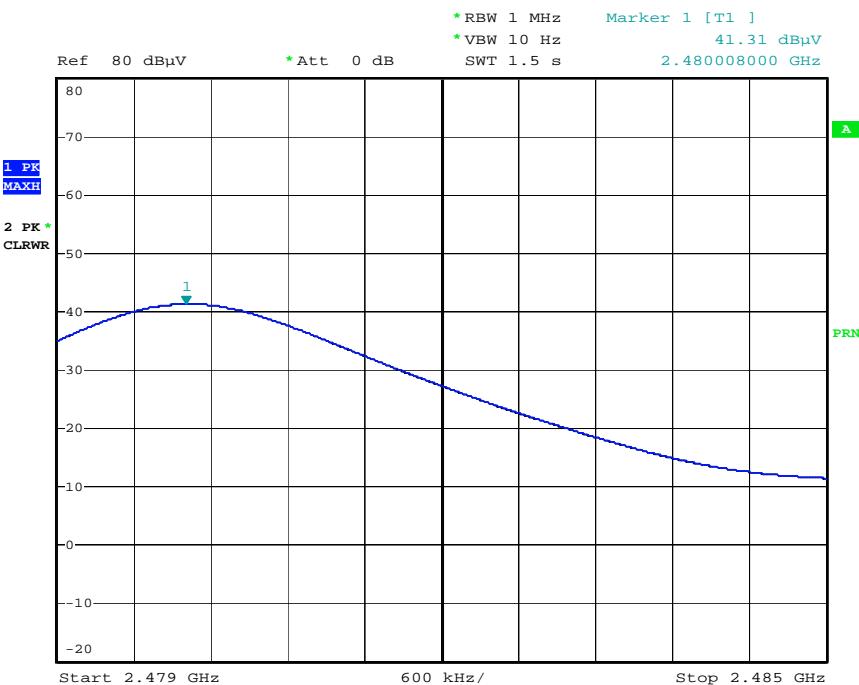

Date: 8.JUL.2012 22:07:52


Delta (Vertical_CH 38)

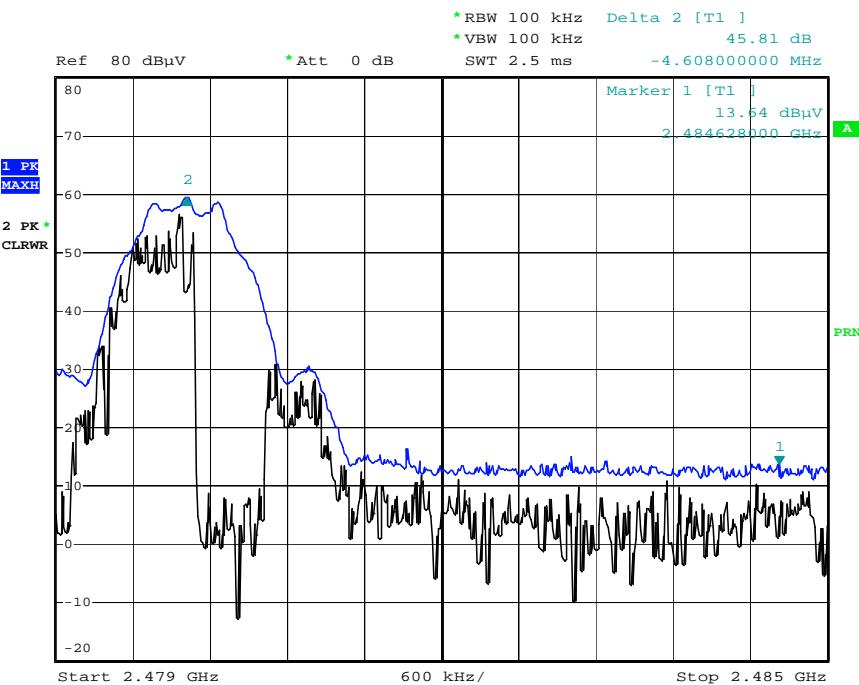

Date: 8.JUL.2012 22:09:06


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Wireless Battery Cover
Test Plots (LE)
Fund. (Peak_Horizontal _CH 0)

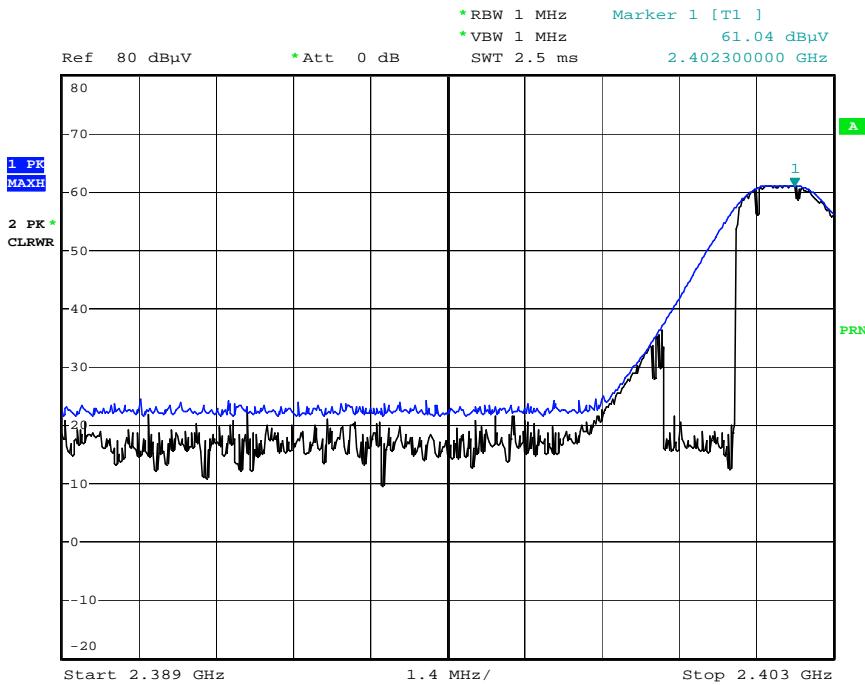

Date: 8.JUL.2012 21:14:09


Fund. (Average_Horizontal _CH 0)

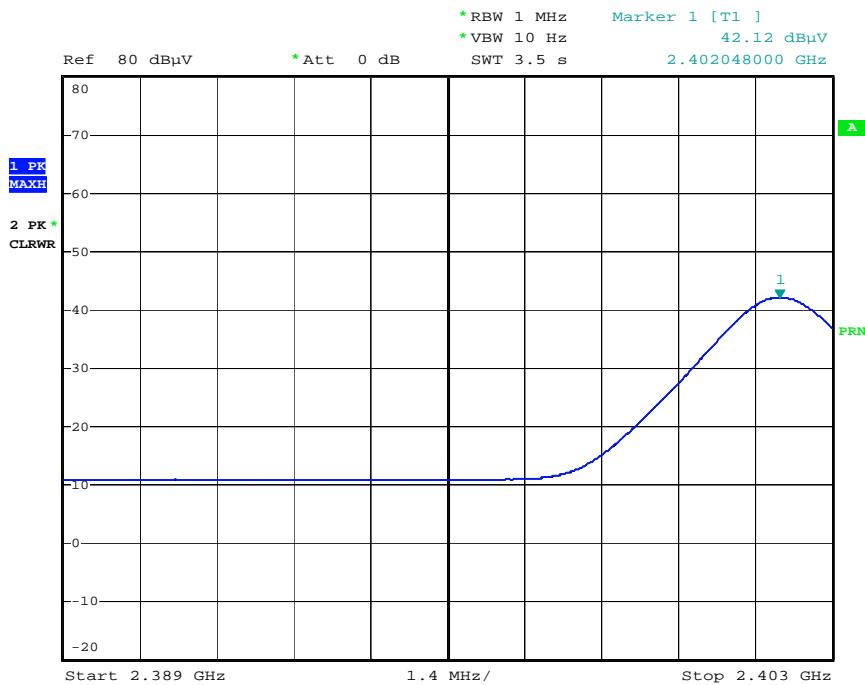

Date: 8.JUL.2012 21:14:33


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Delta (Horizontal _CH 0)

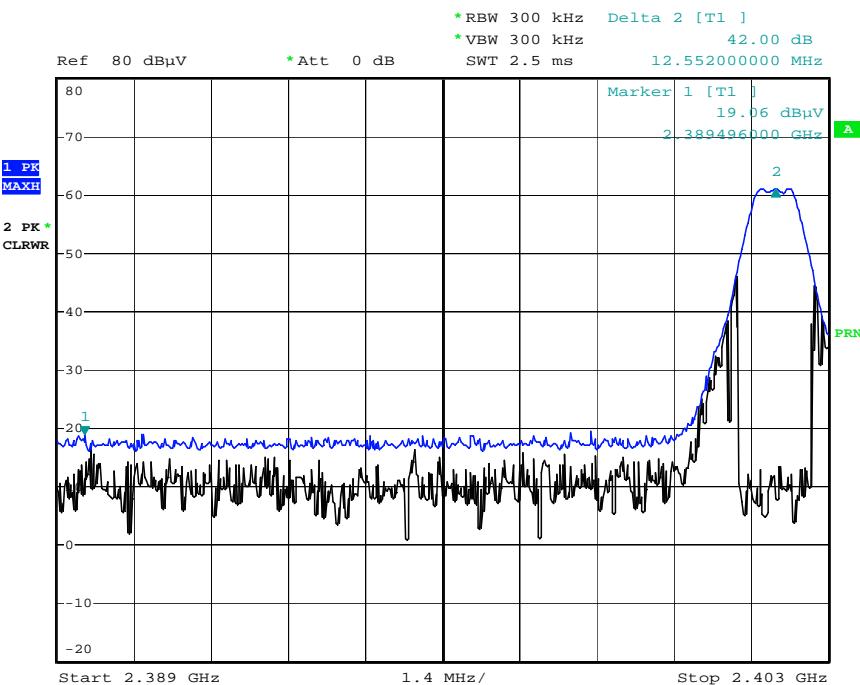

Date: 8.JUL.2012 21:15:25


Fund. (Peak_Vertical_CH 0)

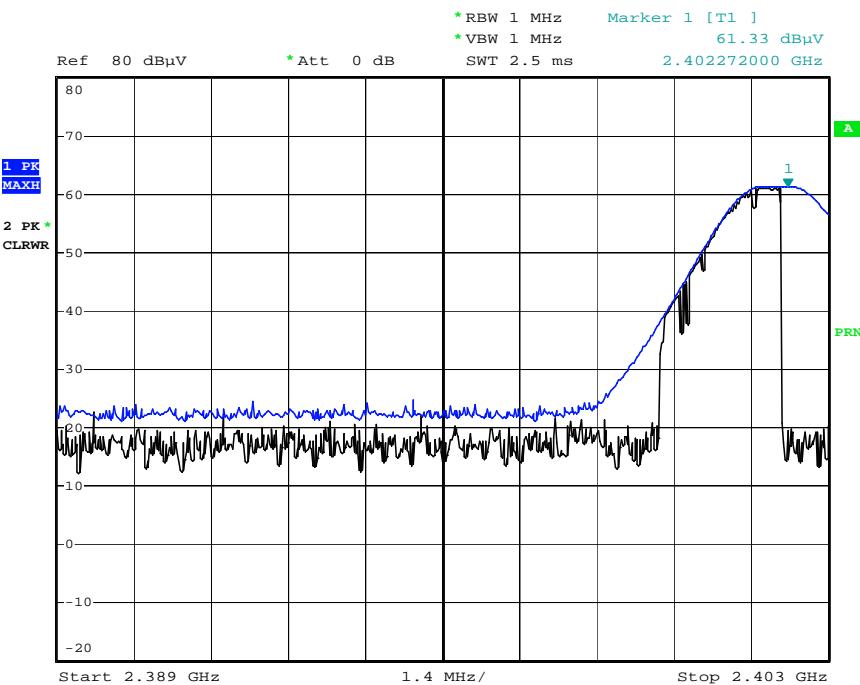

Date: 8.JUL.2012 21:11:19


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Fund. (Average_Verical_CH 0)

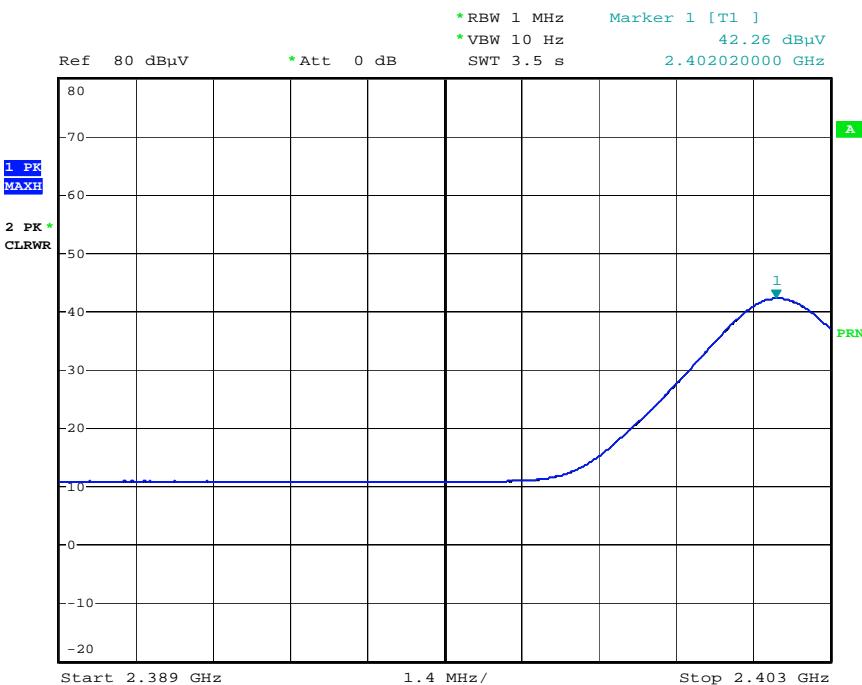

Date: 8.JUL.2012 21:11:48


Delta (Vertical_CH 0)

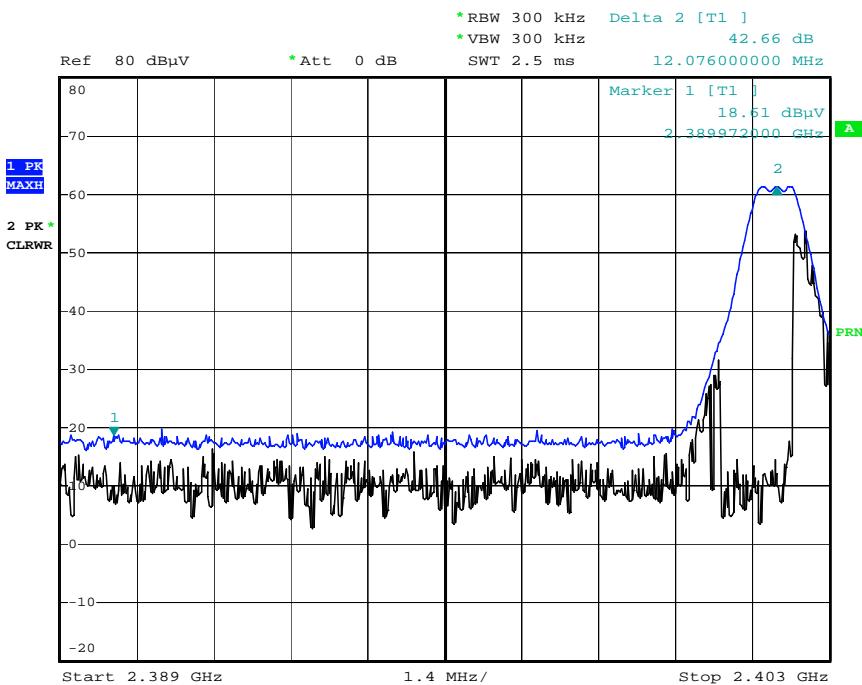

Date: 8.JUL.2012 21:12:46


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			

Fund. (Peak_Horizontal_CH 38)

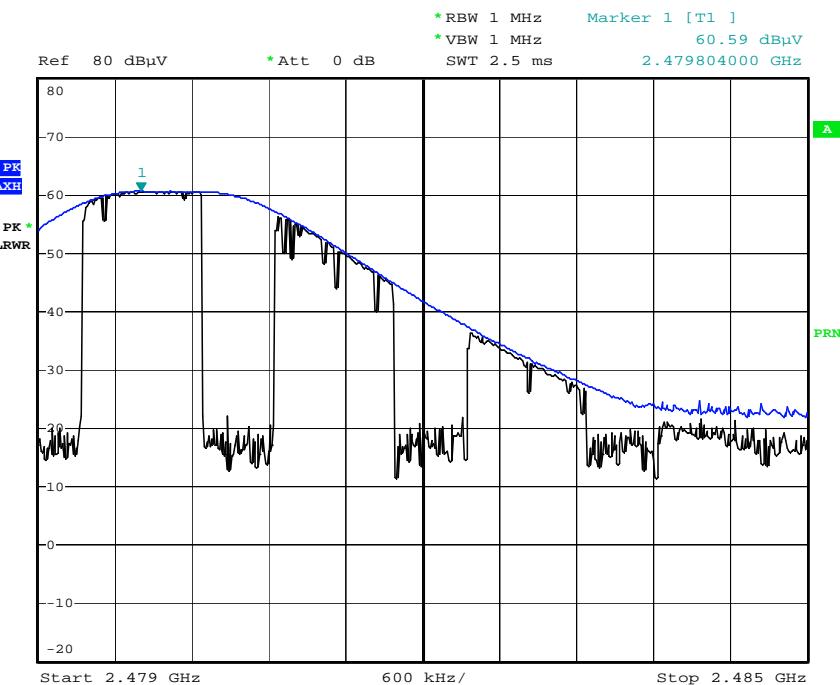

Date: 8.JUL.2012 21:04:53


Fund. (Average_Horizontal_CH 38)

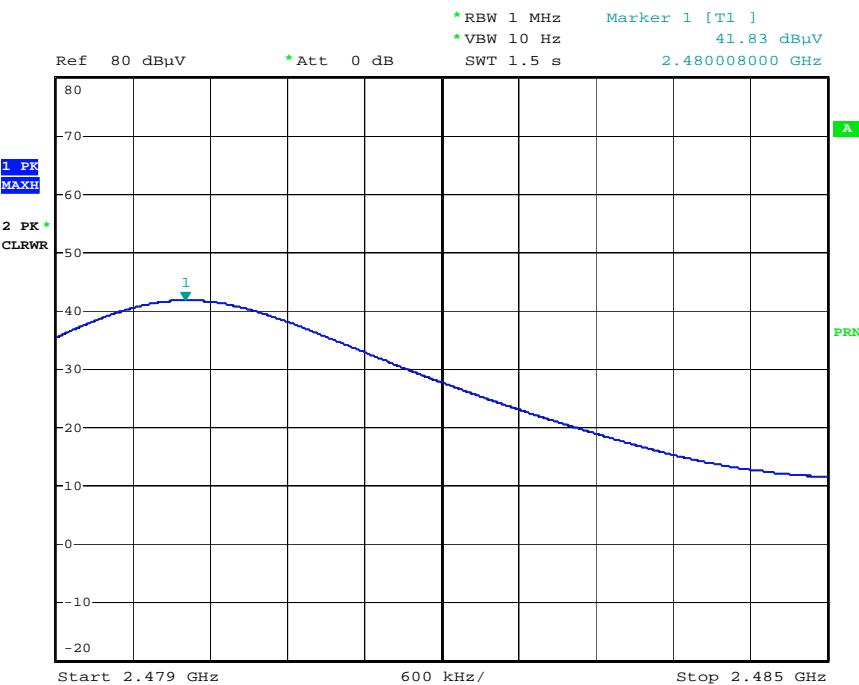

Date: 8.JUL.2012 21:05:15


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Delta (Horizontal_CH 38)

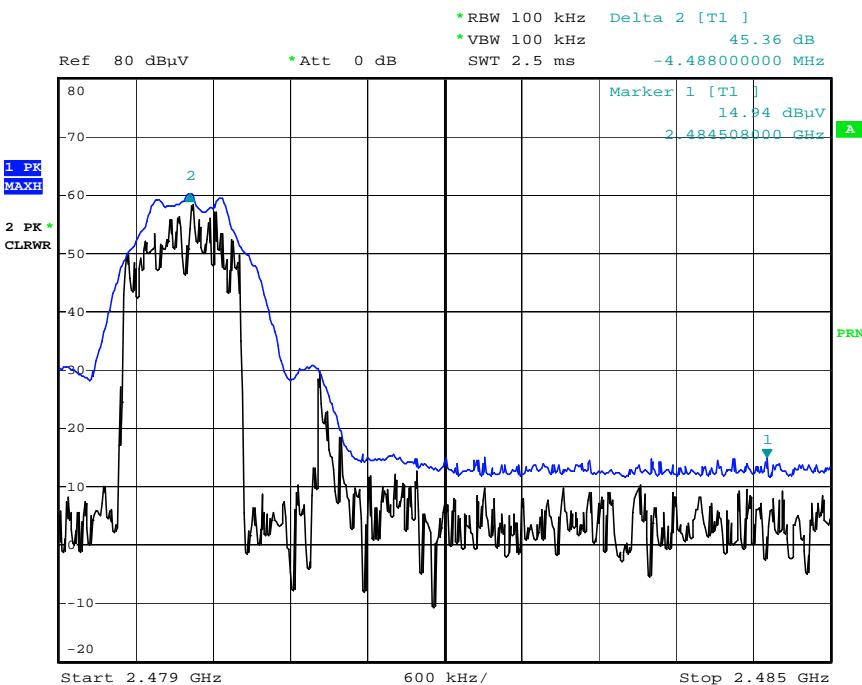

Date: 8.JUL.2012 21:06:18


Fund. (Peak_Vertical_CH 38)

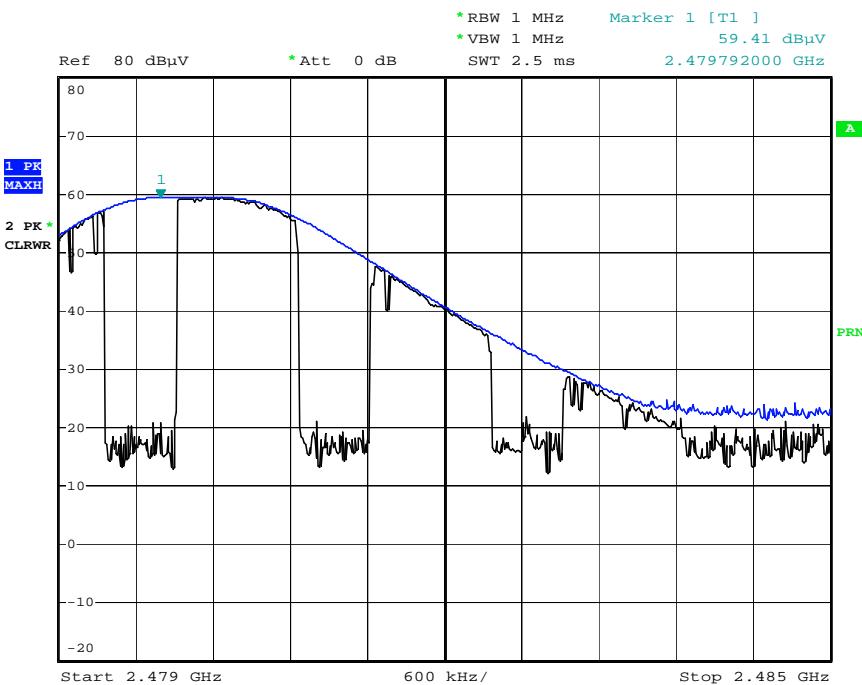

Date: 8.JUL.2012 21:07:38


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:			FCC ID :
HCTR1208FR05	August 06, 2012	CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			TYK-JDS9507

Fund. (Average_Verical_CH 38)

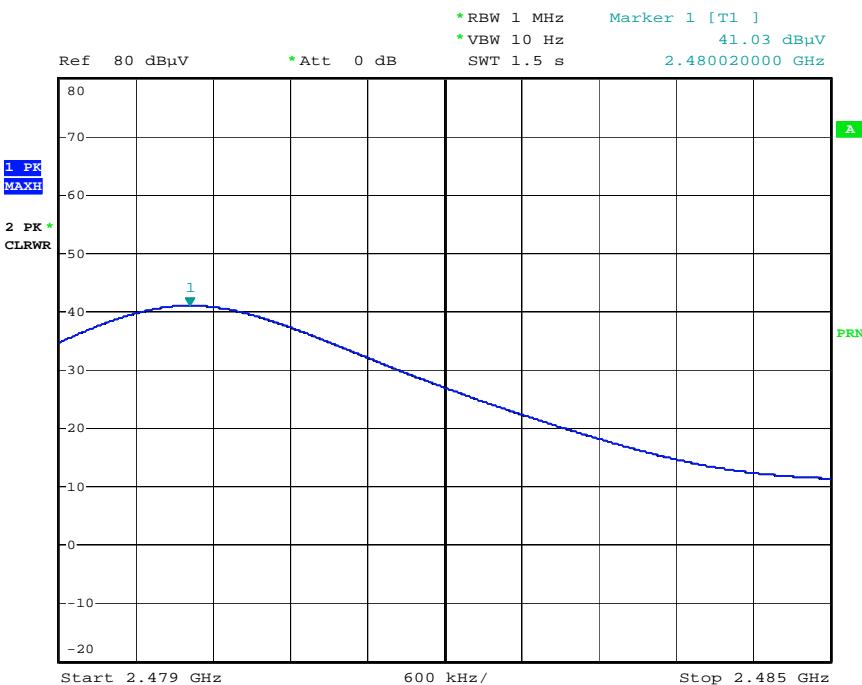

Date: 8.JUL.2012 21:08:02

Delta (Vertical_CH 38)

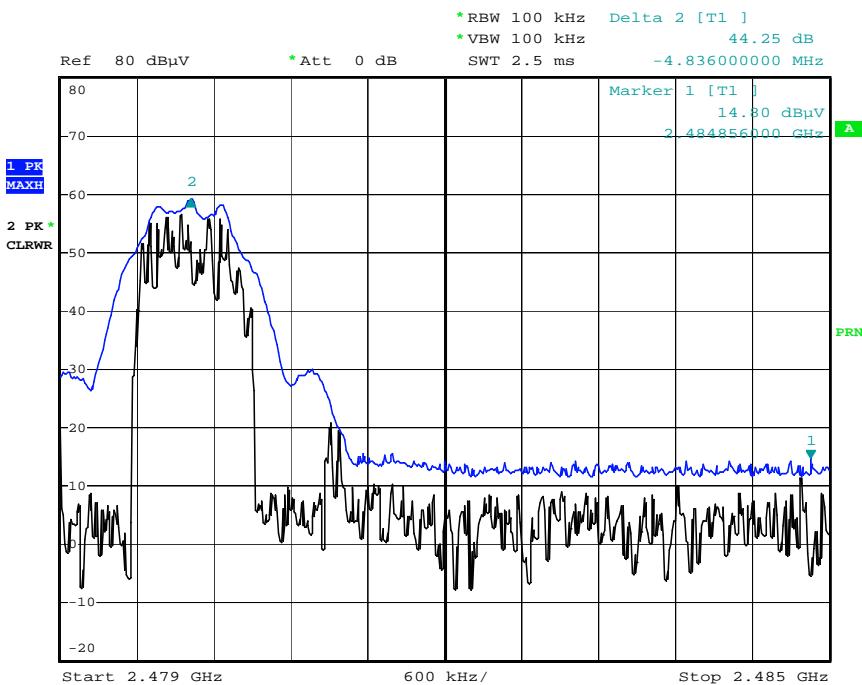

Date: 8.JUL.2012 21:09:00

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			FCC ID : TYK-JDS9507

8.6 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for Ch.0 on BT 4.0 LE mode.

Because Ch.0 on BT 4.0 LE mode is worst case.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

□ RESULT PLOTS

Conducted Emissions (Line 1)


HCT

EMC

EUT: C811
 Manufacturer: NEC CASIO MOBILE COMMUNICATIONS
 Operating Condition: BT4.0 MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART15 CLASS B
 Comment: N

SCAN TABLE: "FCC PART 15 B(N)"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

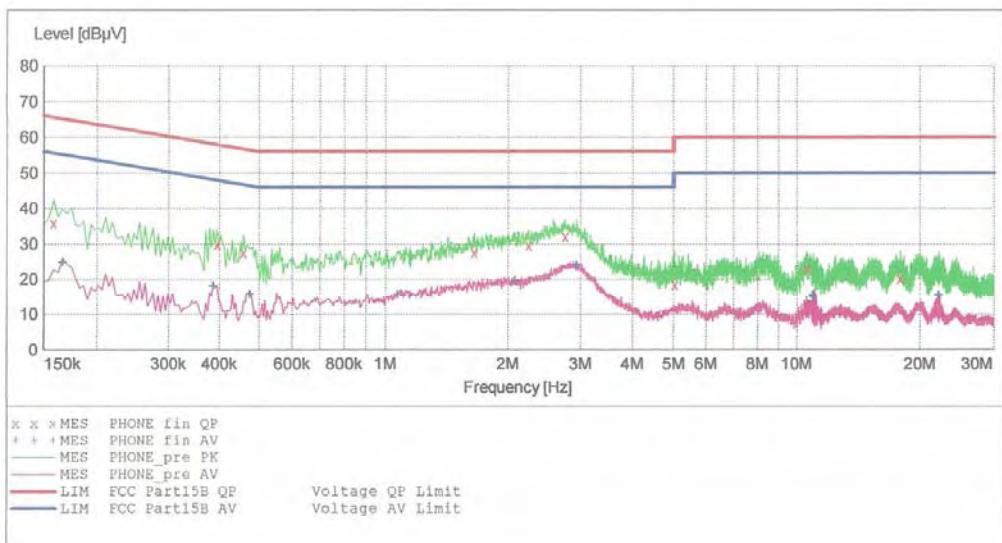

MEASUREMENT RESULT: "PHONE_fin QP"

7/11/2012 11:15AM	Frequency	Level	Transd	Limit	Margin	Line	PE
	MHz	dB μ V	dB	dB μ V	dB		
	0.158010	36.00	9.9	66	29.6	---	---
	0.394010	29.90	9.9	58	28.1	---	---
	0.458010	27.60	9.9	57	29.2	---	---
	1.648000	27.60	10.0	56	28.4	---	---
	2.248000	29.60	10.0	56	26.4	---	---
	2.756000	32.20	10.0	56	23.8	---	---
	5.036000	18.60	10.2	60	41.4	---	---
	10.592000	23.20	10.5	60	36.8	---	---
	17.912000	20.40	10.9	60	39.6	---	---

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:			FCC ID :
HCTR1208FR05	August 06, 2012	CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			TYK-JDS9507



MEASUREMENT RESULT: "PHONE_fin AV"

7/11/2012 11:15AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.166010	24.90	9.9	55	30.3	---	---
0.386010	18.20	9.9	48	29.9	---	---
0.474010	15.90	9.9	46	30.5	---	---
1.072000	15.80	10.0	46	30.2	---	---
2.080000	19.70	10.0	46	26.3	---	---
2.940000	24.20	10.1	46	21.8	---	---
10.940000	15.50	10.5	50	34.5	---	---
10.984000	15.00	10.5	50	35.0	---	---
22.128000	15.50	11.1	50	34.5	---	---

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507

Conducted Emissions (Line 2)


HCT

EMC

EUT: C811
Manufacturer: NEC CASIO MOBILE COMMUNICATIONS
Operating Condition: BT4.0 MODE
Test Site: SHIELD ROOM
Operator: JS LEE
Test Specification: FCC PART15 CLASS B
Comment: H

SCAN TABLE: "FCC PART 15 B(H)"

Short Description: FCC PART 15 CLASS B						
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer Bandw.
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

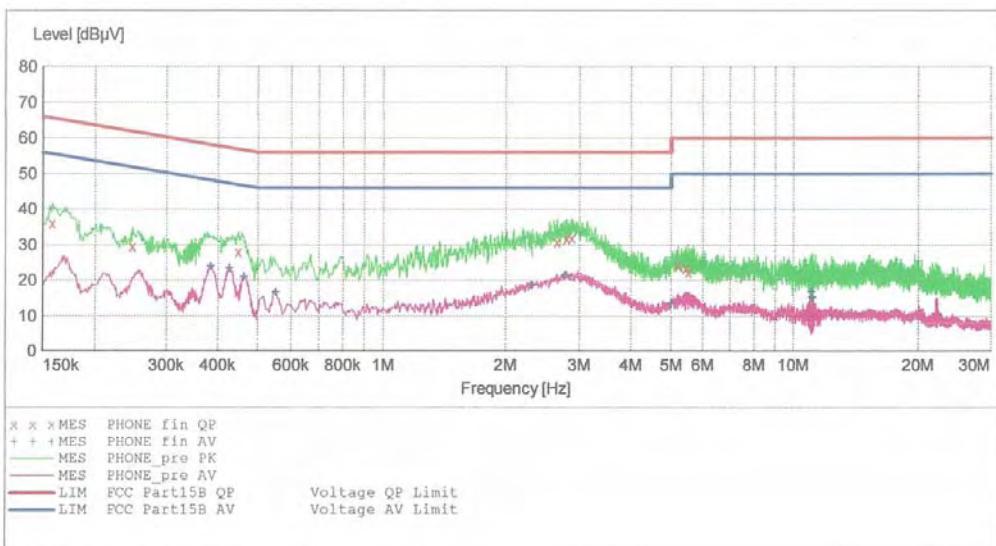

MEASUREMENT RESULT: "PHONE_fin_QP"

7/11/2012 11:11AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.158010	36.10	9.7	66	29.5	---	---
0.247010	29.50	9.7	62	32.4	---	---
0.447010	28.10	9.7	57	28.8	---	---
2.664000	30.90	9.8	56	25.1	---	---
2.800000	31.70	9.8	56	24.3	---	---
2.880000	32.00	9.8	56	24.0	---	---
5.220000	24.20	10.1	60	35.8	---	---
5.452000	23.50	10.1	60	36.5	---	---
5.528000	22.40	10.1	60	37.6	---	---

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:			FCC ID :
HCTR1208FR05	August 06, 2012	CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			TYK-JDS9507

MEASUREMENT RESULT: "PHONE_fin AV"

7/11/2012 11:11AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line dB	PE
0.385010	24.00	9.7	48	24.1	---	---
0.426010	23.50	9.7	47	23.8	---	---
0.462010	21.10	9.7	47	25.6	---	---
0.552000	16.80	9.7	46	29.2	---	---
2.308000	18.60	9.8	46	27.4	---	---
2.772000	21.40	9.8	46	24.6	---	---
5.000000	13.60	10.0	46	32.4	---	---
11.068000	16.90	10.3	50	33.1	---	---
11.112000	15.20	10.3	50	34.8	---	---

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC			FCC ID : TYK-JDS9507

9. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	Annual	02/09/2013	100073
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	200
Rohde & Schwarz	ESI 40 / EMI TEST RECEIVER	Annual	05/03/2013	831564103
Agilent	E4440A/ Spectrum Analyzer	Annual	05/02/2013	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	Annual	09/23/2012	MY51110020
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/19/2012	10094
MITEQ	AMF-6B-180265-35-10P / POWER AMP	Annual	04/16/2013	667624
CERNEX	CBL26405040 / POWER AMP	Annual	04/16/2013	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	10/17/2013	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	Biennial	10/26/2012	342
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	02/09/2013	839117/011
Agilent	E4416A /Power Meter	Annual	11/07/2012	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2013	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	05/02/2013	1
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	05/02/2013	1
Hewlett Packard	11636B/Power Divider	Annual	11/07/2012	11377
Hewlett Packard	11667B / Power Splitter	Annual	06/05/2013	05001
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	11/07/2012	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	11/07/2012	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	11/14/2012	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	05/02/2013	100422
EMCO	6502 LOOP ANTENNA	Biennial	01/11/2014	9009-2536
MITEQ	AMF-6D-001180-35-20P/ POWER AMP	Annual	09/26/2012	990893

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR05	Date of Issue: August 06, 2012	EUT Type: CDMA/GSM/WCDMA/LTE Phone with Bluetooth/WLAN/NFC		FCC ID : TYK-JDS9507