

# TEST REPORT

of

## FCC Part 15 Subpart C AND CANADA RSS-247

New Application;  Class I PC;  Class II PC

**Product :** **J129 IP Deskphone**

**Brand:** **Avaya**

**Model:** **J129**

**Model Difference:** **N/A**

**FCC ID:** **TYM-J129**

**IC:** **3794C-J129**

**FCC Rule Part:** **§15.247, Cat: DTS**

**IC Rule Part:** **RSS-247 issue 2: 2017**

**RSS-Gen issue 5: 2018**

**Applicant:** **AVAYA**

**Address:** **250 Sidney Street, Belleville, Ontario K8P 3Z3,  
Canada**

**Test Performed by:**

**International Standards Laboratory Corp.**

<LT Lab.>

\*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-4;

\*Address:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.

Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

\*Tel : 886-3-407-1718; Fax: 886-3-407-1738

**Report No.: ISL-16LR194FC-R1**

**Issue Date : 2019/04/22**

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory Corp.

## VERIFICATION OF COMPLIANCE

**Applicant:** AVAYA  
**Product Description:** J129 IP Deskphone  
**Brand Name:** Avaya  
**Model No.:** J129  
**Model Difference:** N/A  
**FCC ID:** TYM-J129  
**IC:** 3794C-J129  
**Date of test:** 2019/03/28 ~ 2019/04/19  
**Date of EUT Received:** 2019/03/28

**We hereby certify that:**

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory Corp.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

**Test By:**



**Date:**

2019/04/22

---

Barry Lee / Senior Engineer

**Prepared By:**



**Date:**

2019/04/22

---

Gigi Yeh / Senior Engineer

**Approved By:**



**Date:**

2019/04/22

---

Jerry Liu / Technical Manager

## Version

Version No.	Date	Description
00	2017/06/29	Initial creation of document
02	2019/04/22	<ol style="list-style-type: none"><li>1. Replacement of some non-RF parts on the main board.</li><li>2. A DC jack is added.</li></ol>

## Uncertainty of Measurement

Description Of Test	Uncertainty
Conducted Emission (AC power line)	2.586 dB
Field Strength of Spurious Radiation	$\leq 30\text{MHz}$ : 2.96dB 30-1GHz: 4.22 dB 1-40 GHz: 4.08 dB
Conducted Power	2.412 GHz: 1.30 dB 5.805 GHz: 1.55 dB
Power Density	2.412 GHz: 1.30 dB 5.805 GHz: 1.67 dB
Frequency	0.0032%
Time	0.01%
DC Voltage	1%

## Table of Contents

<b>1</b>	<b>General Information.....</b>	<b>6</b>
1.1	Related Submittal(s) / Grant (s) .....	8
1.2	Test Methodology .....	8
1.3	Test Facility.....	8
1.4	Special Accessories.....	8
1.5	Equipment Modifications.....	8
<b>2</b>	<b>SYSTEM TEST CONFIGURATION.....</b>	<b>9</b>
2.1	EUT Configuration .....	9
2.2	EUT Exercise .....	9
2.3	Test Procedure.....	9
2.4	Configuration of Tested System.....	10
<b>3</b>	<b>Summary of Test Results.....</b>	<b>11</b>
<b>4</b>	<b>Description of Test Modes.....</b>	<b>11</b>
<b>5</b>	<b>Peak Output Power Measurement .....</b>	<b>12</b>
5.1	Standard Applicable: .....	12
5.2	Measurement Equipment Used: .....	13
5.3	Test Set-up: .....	13
5.4	Measurement Procedure: .....	13
5.5	Measurement Result: .....	14
<b>6</b>	<b>100kHz Bandwidth of Band Edges Measurement .....</b>	<b>15</b>
6.1	Standard Applicable: .....	15
6.2	Measurement Equipment Used: .....	16
6.3	Test Setup.....	17
6.4	Measurement Procedure: .....	18
6.5	Field Strength Calculation: .....	18
6.6	Measurement Result: .....	18
<b>7</b>	<b>Spurious Radiated Emission Test.....</b>	<b>23</b>
7.1	Standard Applicable .....	23
7.2	Measurement Equipment Used: .....	23
7.3	Test SET-UP:.....	23
7.4	Measurement Procedure: .....	24
7.5	Field Strength Calculation .....	24
7.6	Measurement Result: .....	24
<b>8</b>	<b>Antenna Requirement .....</b>	<b>28</b>
8.1	Standard Applicable: .....	28
8.2	Antenna Connected Construction: .....	28

## 1 General Information

General:

Product Name:	J129 IP Deskphone
Brand Name:	Avaya
Model Name:	J129
Model Difference:	N/A
Operation Environment	Indoor used
TPC	No
DFS	No
Power Supply:	1. 48Vdc by AC Adapter, Model No.: POE 2. 5Vdc by AC/DC Adapter; Model No.:PSAC12R-050

IC RSS-Gen:

Product SW version	FW_S_J129_R2_0_0_0_0b248
Product HW version	14124-1
Radio SW version	FW_S_J129_R2_0_0_0_0b248
Radio HW version	15329-1A

	FCC	IC
RF power setting in TEST SoftWare	<p>2.4G :</p> <p>b mode : low(17) mid(17) high(16)            g mode : low(13) mid(13) high(13)            n20 mode : low(13) mid(13) high(12)            n40 mode : low(13) mid(13) high(12)</p> <p>5G :</p> <p>B1            a mode : low(17) mid(17) high(17)            n20 mode : low(13) mid(13) high(13)            n40 mode : low(13) high(13)            ac mode : CH 42 5210MHz(12)</p> <p>B3            a mode : low(17) mid(17) high(17)            n20 mode : low(13) mid(13) high(13)            n40 mode : low(13) high(13)            ac mode : CH 155 5775MHz(12)</p>	<p>2.4G :</p> <p>b mode : low(17) mid(17) high(16)            g mode : low(13) mid(13) high(13)            n20 mode : low(13) mid(13) high(12)            n40 mode : low(13) mid(13) high(12)</p> <p>5G :</p> <p><b>B1</b>  <b>a mode : low(14) mid(14) high(14)</b>  <b>n20 mode : low(11) mid(11) high(11)</b>  <b>n40 mode : low(11) high(11)</b>  <b>ac mode : CH 42 5210MHz(11)</b></p> <p>B3            a mode : low(17) mid(17) high(17)            n20 mode : low(13) mid(13) high(13)            n40 mode : low(13) high(13)            ac mode : CH 155 5775MHz(12)</p>

Power Tolerance: +/- 1 dB

WLAN: 1TX/1RX

Wi-Fi	Frequency Range (MHz)	Channels	Peak / Average Rated Power	Modulation Technology	
802.11b	2412 – 2462(DTS)	11	19.43dBm (PK)	DSSS	
802.11g	2412 – 2462(DTS)	11	22.02dBm (PK)		
802.11n (2.4G)	HT20 2412 – 2462(DTS)	11	21.85dBm (PK)		
	HT40 2422 – 2452(DTS)	7	21.94dBm (PK)		
802.11a	5180 – 5240(NII)	4	17.31dBm (AV)	OFDM	
	5745 – 5825(NII)	5	13.14dBm (AV)		
802.11n(5G)	HT20, 5180 – 5240(NII)	4	16.57dBm (AV)		
	HT20, 5745 – 5825(NII)	5	12.10dBm (AV)		
	HT40, 5190 – 5230(NII)	2	15.13dBm (AV)		
	HT40, 5755 – 5815(NII)	2	13.65dBm (AV)		
802.11ac	HT80, 5210(NII)	1	19.53dBm (AV)		
	HT80, 5775(NII)	1	18.75dBm (AV)		
Modulation type		CCK, DQPSK, DBPSK for DSSS 256QAM.64QAM. 16QAM, QPSK, BPSK for OFDM			
Antenna Designation		Fixed Chip Antenna WiFi 2.4G Antenna : 2.1 dBi WiFi 5G Antenna : 2.4 dBi			

The devices can be installed inside the EUT are listed below:

Component	Vendor	Description
Wireless module	Avaya	Vender Model: J100 / K100 Wireless module

The EUT is compliance with IEEE 802.11 a/b/g/n/ac Standard.

This report applies for 2.4GHz Wifi..

**Remark:** The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### **1.1 Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for **FCC ID: TYM-J129** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and **IC: 3794C-J129** filing to comply with Industry Canada RSS-247 issue 2.

### **1.2 Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document: 558074 D01 15.247 Meas Guidance v0.5r02

### **1.3 Test Facility**

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory Corp.** <LT Lab.> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10: 2013. FCC Registration Number is: 487532; Designation Number is: TW0997, Canada Registration Number: 4067B-4.

### **1.4 Special Accessories**

Not available for this EUT intended for grant.

### **1.5 Equipment Modifications**

Not available for this EUT intended for grant.

## 2 SYSTEM TEST CONFIGURATION

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 6 of ANSI C63.10: 2013 and RSS-Gen issue 5. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8/1.5 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” Is still within the 3dB illumination BW of the measurement antenna. According to the requirements in Section 8 and 13 and Sub-clause 8.3.1.2 of ANSI C63.10: 2013.

## 2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed channel)

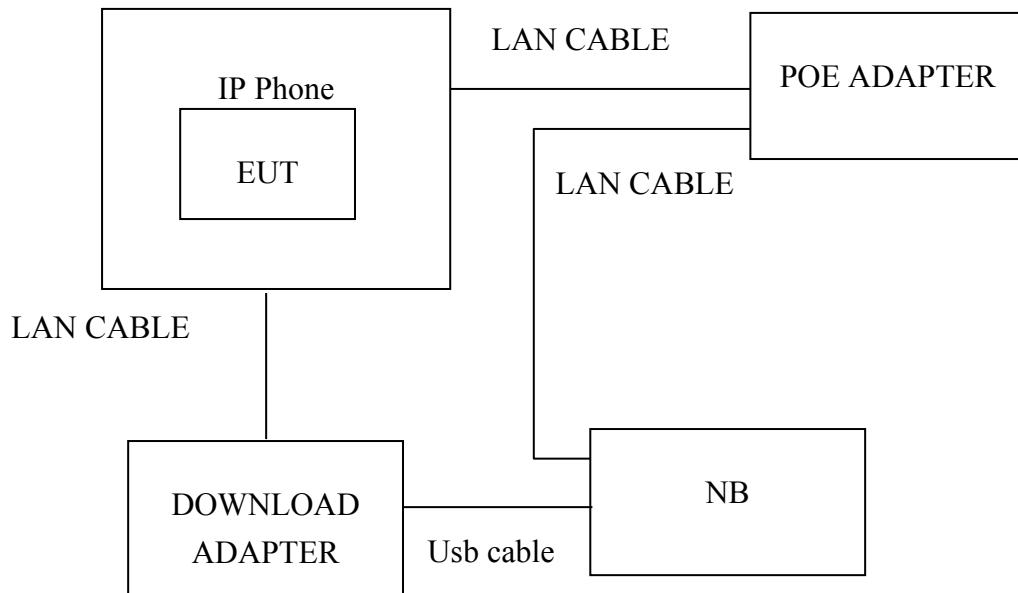


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	NB	Dell	LATITUDE 3340	481.06F01.0003	NA	Non-shielded
2	IP Phone	AVAYA	J129	16WZ2620003T	Non-shielded	Non-shielded
3	DOWNLOAD ADAPTER	AVAYA	FWADPT1A-003	09WZ30551803	Non-shielded	Non-shielded
4	POE Adaptor	AVAYA	POE	C153166400000 00210	Non-shielded	Non-shielded

### 3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207(a) RSS-Gen §8.8	AC Power Line Conducted Emission	N/A
§15.247(b) (3),(4) RSS-247 issue 2,§5.4(4)	Peak Output Power/ EIRP	Compliant
§15.247(a)(2) RSS-247 issue 2, §5.2(1) RSS-Gen §6.6	6dB & 99% Power Bandwidth	N/A
§15.247(d) RSS-247 issue 2, §5.5	100 kHz Bandwidth of Frequency Band Edges	N/A
§15.247(d) RSS-247 issue 2, §5.5	Spurious Emission	Compliant
§15.247(e) RSS-247 issue 2, §5.2	Peak Power Density	N/A
§15.203 RSS-GEN 8.3	Antenna Requirement	Compliant

This is a Class II Permission Change case with the replacement of some non-RF parts on the main board, and a DC jack is added

### 4 Description of Test Modes

The EUT has been tested under engineering operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

The worst case : 802.11 b mode: Channel low (2412MHz) 、 mid (2437MHz) 、 high (2462MHz) was reported for Radiated Emission.

Note: Test item list below has been re-verify:

1. RF Output power
2. Transmitter spurious emissions above 1GHz
3. Receiver spurious emissions above 1GHz

## 5 Peak Output Power Measurement

### 5.1 Standard Applicable:

According to §15.247(b)(3),(4)(b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

According to RSS-247 issue 2, §5.4


(D) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e)

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

## 5.2 Measurement Equipment Used:

Conducted Emission Test Site					
Equipment Type	Manufacturer	Model Number	Serial Number	Last Cal.	Cal Due.
Power Meter 05	Anritsu	ML2495A	1116010	10/28/2018	10/27/2019
Power Sensor 05	Anritsu	MA2411B	34NKF50	10/28/2018	10/27/2019
Power Sensor 06	DARE	RPR3006W	13I00030SNO3 3	01/11/2019	01/10/2020
Power Sensor 07	DARE	RPR3006W	13I00030SNO3 4	01/11/2019	01/10/2020
Temperature Chamber	KSON	THS-B4H100	2287	02/19/2019	02/18/2020
DC Power supply	ABM	8185D	N/A	01/10/2019	01/09/2020
AC Power supply	EXTECH	CFC105W	NA	12/25/2018	12/24/2019
Attenuator	Woken	Watt-65m3502	11051601	NA	NA
Splitter	MCLI	PS4-199	12465	12/26/2017	12/25/2019
Spectrum analyzer	keysight	N9010A	MY56070257	10/15/2018	10/14/2019
Spectrum analyzer	R&S	FSP40	100116	01/10/2019	01/09/2020
Test Software	DARE	Radimation Ver:2013.1.23	NA	NA	NA

## 5.3 Test Set-up:

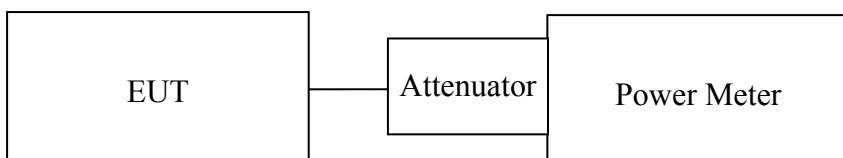

## 5.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

## 5.5 Measurement Result:

## 802.11b

Cable loss = 0		Output Power		Limit (dBm)	
CH	Detector				
	PK (dBm)	AV (dBm)			
Low	19.43	13.29	30.00	30.00	
Mid	19.04	13.21			
High	18.41	13.01			

## 802.11g

Cable loss = 0		Output Power		Limit (dBm)	
CH	Detector				
	PK (dBm)	AV (dBm)			
Low	21.94	10.14	30.00	30.00	
Mid	22.02	9.95			
High	21.89	9.84			

## 802.11n\_HT20

Cable loss = 0		Output Power		Limit (dBm)	
CH	Detector				
	PK (dBm)	AV (dBm)			
Low	21.85	10.01	30.00	30.00	
Mid	21.73	9.93			
High	21.69	9.88			

## 802.11n\_HT40

Cable loss = 0		Output Power		Limit (dBm)	
CH	Detector				
	PK (dBm)	AV (dBm)			
Low	21.94	7.15	30.00	30.00	
Mid	21.53	7.09			
High	21.19	7.01			

## 6 100kHz Bandwidth of Band Edges Measurement

### 6.1 Standard Applicable:

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

According to RSS-247 issue 2, §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digi-tally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

## 6.2 Measurement Equipment Used:

### 6.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.


### 6.2.2. Radiated emission:

Chamber 19(966)					
Equipment Type	Manufacturer	Model Number	Serial Number	Last Cal.	Cal Due.
966 Chamber	Chance Most	Chamber 19	N/A	08/13/2018	08/12/2019
Spectrum analyzer	R&S	FSP40	100116	01/10/2019	01/09/2020
EMI Receiver	R&S	ESR3	102461	08/08/2018	08/07/2019
Loop Antenna(9K-30M)	EM	EM-6879	271	06/06/2018	06/05/2020
Bilog Antenna (30M-1G)	SCHWARZBECK	VULB9168 w 5dB Att	736	01/29/2019	01/28/2020
Horn antenna (1G-18G)	SCHWARZBECK	9120D	9120D-1627	11/27/2017	11/26/2019
Horn antenna (18G-26G)	Com-power	AH-826	081001	11/21/2017	11/20/2019
Horn antenna (26G-40G)	Com-power	AH-640	100A	03/29/2019	03/28/2021
Preamplifier (9k-1000M)	HP	8447F	3113A06362	01/14/2019	01/13/2020
Preamplifier(1G-26G)	Agilent	8449B	3008A02471	10/29/2018	10/28/2019
Preamplifier (26G-40G)	MITEQ	JS4-26004000-27- 5A	818471	11/20/2017	07/21/2019
RF Cable (9k-18G)	HUBER SUHNER	SUCOFLEX 104A	MY1397/4A	01/17/2019	01/16/2020
RF cable (18G~40G)	HUBER SUHNER	Sucoflex 102	27963/2&37421/ 2	11/12/2018	11/11/2019
Turn Table	MF	Turn Table-19	Turn Table-19	N/A	N/A
Mast Tower	MF	JSDES-15A	1308283	N/A	N/A
Controller	MF	MF-7802BS	MF780208460	N/A	N/A
AC power source	T-Power	TFC-1005	40006471	N/A	N/A
Signal Generator	Anritsu	MG3692A	20311	01/09/2019	01/08/2020
2.4G Filter	Micro-Tronics	Brm50702	76	12/25/2018	12/24/2019
Test Software	Audix	E3 Ver:6.12023	N/A	N/A	N/A


### 6.3 Test Setup

The test item only performed radiated mode

(A) Radiated Emission Test Setup for frequency below 1000MHz

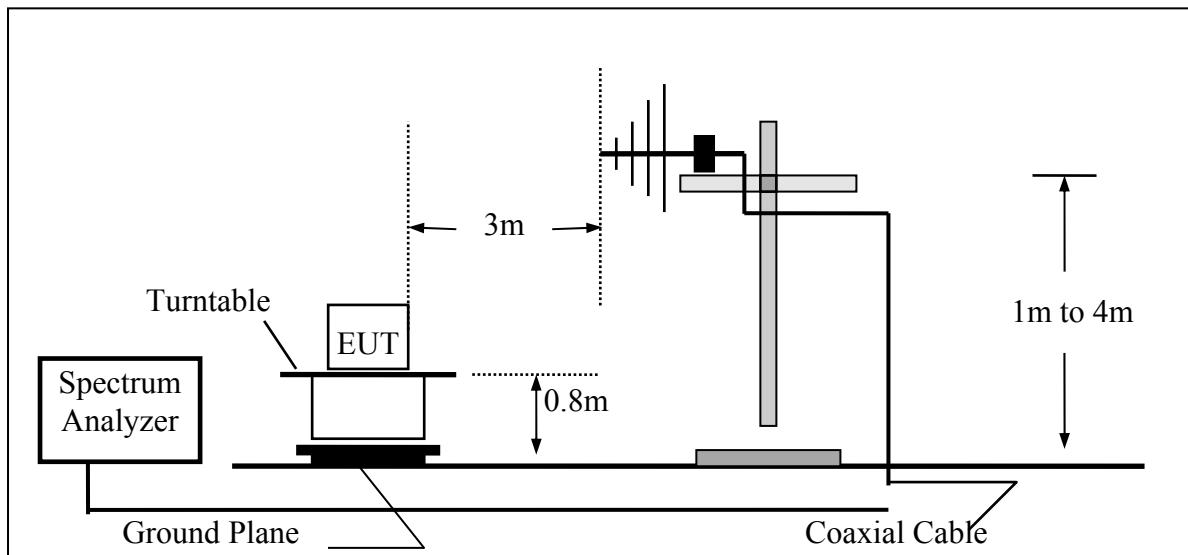

(B) Radiated Emission Test Setup for frequency above 1 GHz

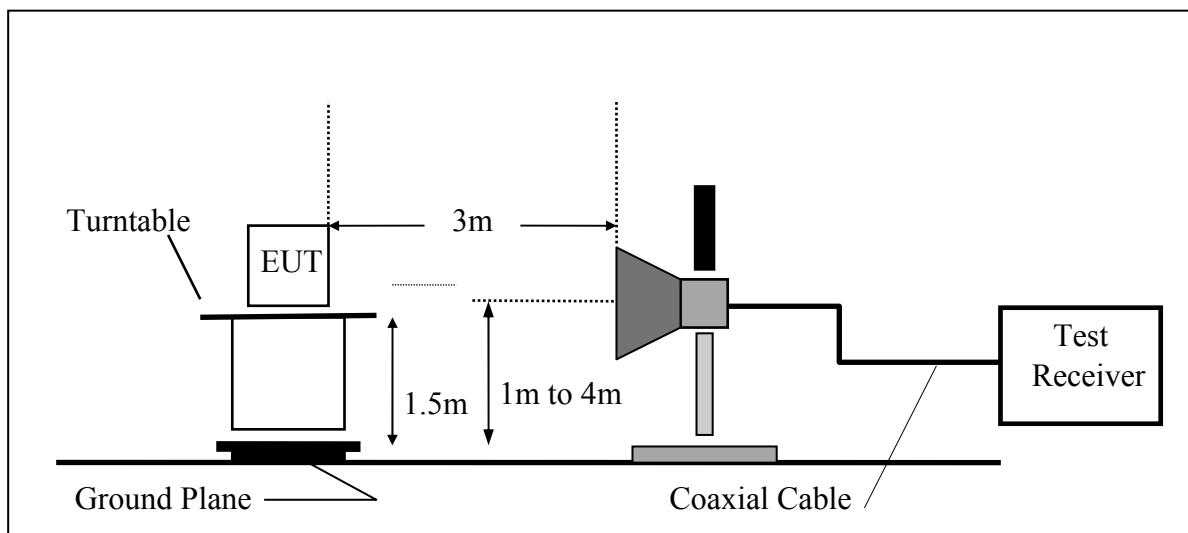

#### 6.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100kHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

#### 6.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


#### 6.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

## Radiated Emission: 802.11 g mode (Worst case)

Operation Mode TX CH Low  
 Fundamental Frequency 2412 MHz  
 Temperature 25 °C

Test Date 2019/04/19  
 Test By Barry  
 Humidity 60 %

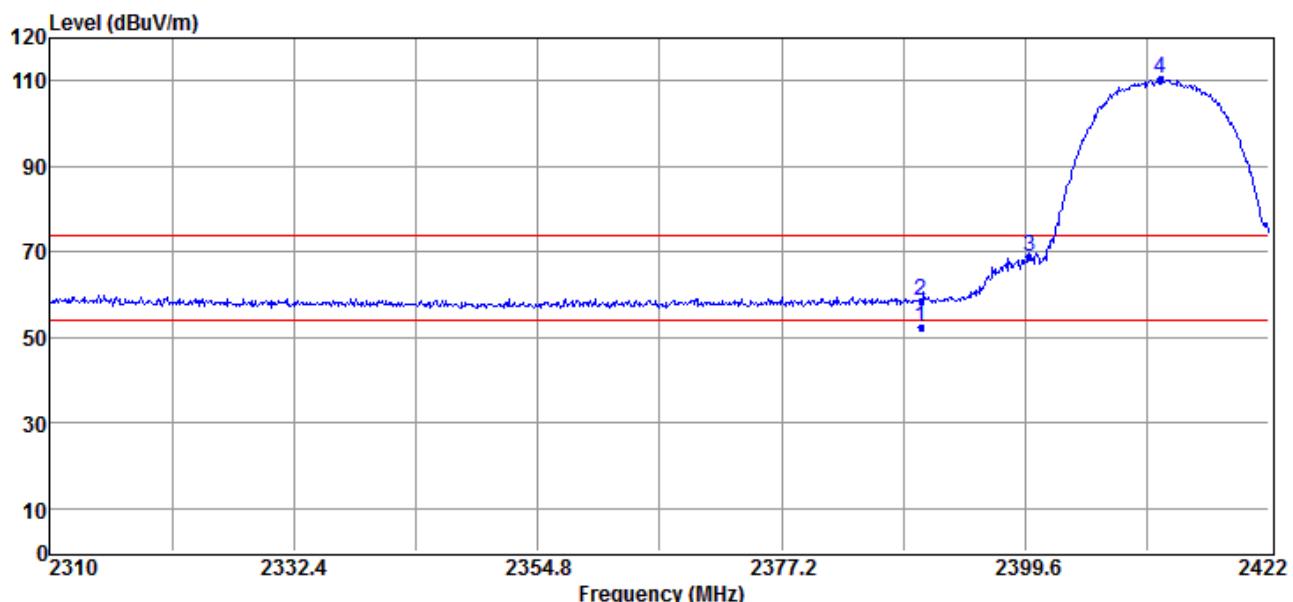


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	19.75	32.72	52.47	54.00	-1.53	Average	VERTICAL
2	2390.00	25.75	32.72	58.47	74.00	-15.53	Peak	VERTICAL
3	2400.00	36.19	32.71	68.90	90.49	-21.59	Peak	VERTICAL
4	2412.03	77.77	32.72	110.49	F	--	Peak	VERTICAL

## Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

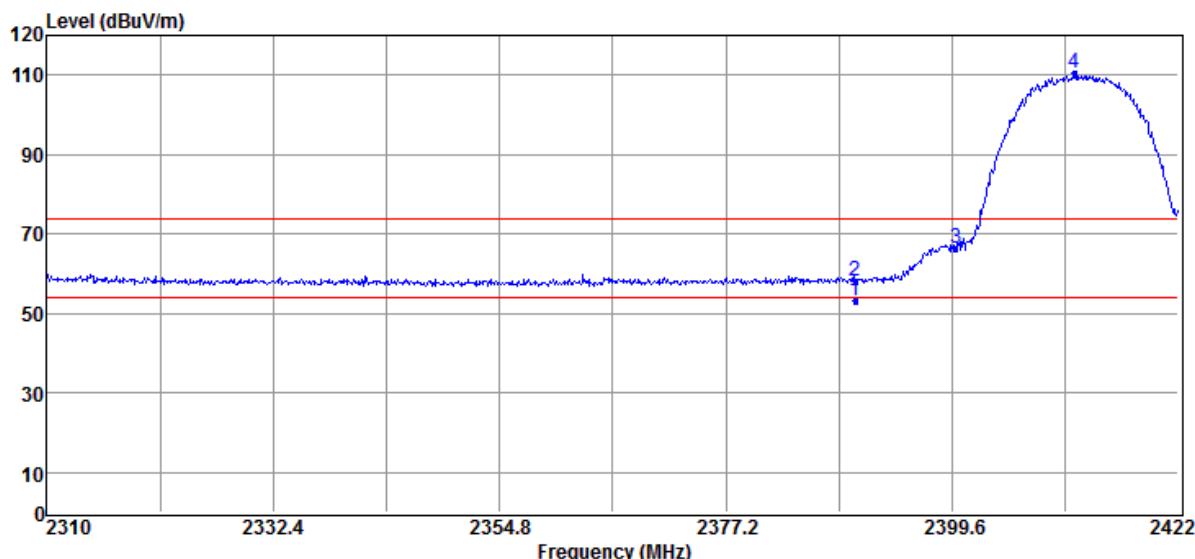

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	20.50	32.72	53.22	54.00	-0.78	Average	HORIZONTAL
2	2390.00	25.58	32.72	58.30	74.00	-15.70	Peak	HORIZONTAL
3	2400.00	33.61	32.71	66.32	90.47	-24.15	Peak	HORIZONTAL
4	2411.70	77.75	32.72	110.47	F	--	Peak	HORIZONTAL


**Remark:**

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

Operation Mode TX CH High  
 Fundamental Frequency 2462 MHz  
 Temperature 25 °C

Test Date 2019/04/19  
 Test By Barry  
 Humidity 60 %

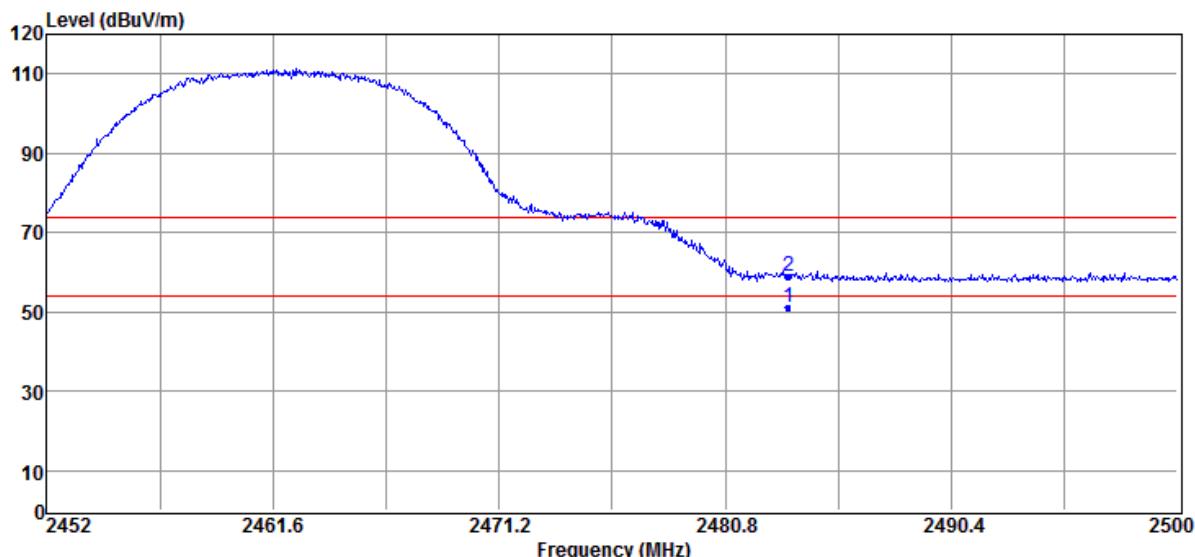


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2483.50	18.38	32.76	51.14	54.00	-2.86	Average	VERTICAL
2	2483.50	26.21	32.76	58.97	74.00	-15.03	Peak	VERTICAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

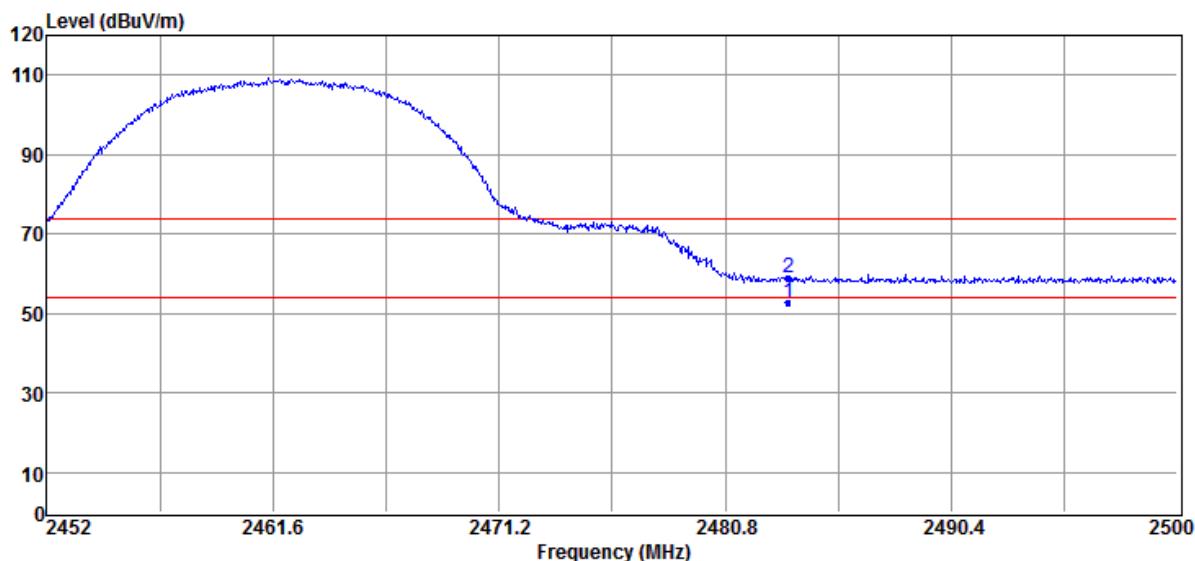

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2483.49	20.18	32.76	52.94	54.00	-1.06	Average	HORIZONTAL
2	2483.49	26.22	32.76	58.98	74.00	-15.02	Peak	HORIZONTAL

**Remark:**

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Note: “F” denotes fundamental frequency**

## 7 Spurious Radiated Emission Test

### 7.1 Standard Applicable

According to §15.247(d), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-247 issue 2, §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 7.2 Measurement Equipment Used:

### 7.3 Conducted Emission at antenna port:

Refer to section 6.2 for details.

### 7.4 Radiated emission:

Refer to section 8.2 for details.

### 7.5 Test SET-UP:

The test item only performed radiated mode

Refer to section 8.3 for details.

## 7.6 Measurement Procedure:

- 1 According 414788 section 2, Either OATS or chamber for radiated emission below 30MHz, the test was done at 966 chamber, the test site was evaluated with OATS and the Chamber has test signals level greater than OATS's .
- 2 The EUT was placed on a turn table which is 0.8m/1.5m above ground plane in 966 chamber.
- 3 The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4 EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5 When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
- 6 Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 7 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 8 Repeat above procedures until all frequency measured were complete.

## 7.7 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

## 7.8 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

## Radiated Spurious Emission Measurement Result (above 1GHz) (Worst Case)

Operation Mode	801.11g TX mode	Test Date	2019/04/19
Channel number	CH Low	Test By	Barry
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	1196.00	59.31	-19.90	39.41	74.00	-34.59	Peak	VERTICAL
2	4824.00	54.98	-9.22	45.76	74.00	-28.24	Peak	VERTICAL
1	4824.00	51.97	-9.22	42.75	74.00	-31.25	Peak	HORIZONTAL
2	5802.00	50.77	-6.55	44.22	74.00	-29.78	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

## Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11g TX mode	Test Date	2019/04/19
Channel number	CH Mid	Test By	Barry
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	4874.00	53.61	-9.09	44.52	74.00	-29.48	Peak	VERTICAL
2	5816.00	51.06	-6.51	44.55	74.00	-29.45	Peak	VERTICAL
1	4874.00	59.91	-9.09	50.82	74.00	-23.18	Peak	HORIZONTAL
2	7311.00	48.73	-1.64	47.09	74.00	-26.91	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

## Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	802.11g TX mode	Test Date	2019/04/19
Channel number	CH High	Test By	Barry
Temperature	25 °C	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	4924.00	60.71	-8.96	51.75	74.00	-22.25	Peak	VERTICAL
2	7386.00	51.10	-1.60	49.50	74.00	-24.50	Peak	VERTICAL
1	4924.00	56.25	-8.96	47.29	74.00	-26.71	Peak	HORIZONTAL
2	5809.00	53.07	-6.52	46.55	74.00	-27.45	Peak	HORIZONTAL

## Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

## 8 Antenna Requirement

### 8.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

According to RSS-GEN 7.1.2, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be ad

ded to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

### 8.2 Antenna Connected Construction:

The directional gins of antenna used for transmitting is below table, and the antenna connector is designed with fixed type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

	P/N	Type	Gain (2.4GHz)	Gain (5GHz)
Ant	AH 104N2450D1	Fixed Chip Antenna	2.1dBi	2.4dBi