



**FCC 47CFR part 15C
Test Report
For
IEEE 802.15.4 wireless controller module
JN5148-T01-M04**

Reference Standard: FCC 47CFR part 15C

Manufacturer: NXP Laboratories UK Ltd

For type of equipment and serial number, refer to section 3

Report Number: 05-481/4717/1/11

Report Produced by: -

R.N. Electronics Ltd.

1 Arnolds Court
Arnolds Farm Lane
Mountnessing
Essex
CM13 1UT
U.K.

www.RNelectronics.com

Telephone +44 (0) 1277 352219
Facsimile +44 (0) 1277 352968

1. Contents

1.	CONTENTS	2
2.	SUMMARY OF TEST RESULTS.....	3
3.	EQUIPMENT UNDER TEST (EUT).....	4
3.1	Equipment Specification.....	4
3.2	EUT Configurations for testing	4
3.3	EUT Modes	4
3.4	Emissions Configuration	5
4.	SPECIFICATIONS	6
4.1	Deviations	6
4.2	Tests at Extremes of Temperature & Voltage	6
4.3	Measurement Uncertainties	6
5.	TESTS, METHODS AND RESULTS.....	7
5.1	Conducted Emissions	7
5.2	Radiated Emissions	8
5.3	Intentional Radiator Field Strength & Peak Conducted Power	9
5.4	Duty Cycle	10
5.6	Maximum Spectral Power Density	11
5.7	6 dB Bandwidth.....	12
5.8	Band Edge Compliance	13
6.	PLOTS AND RESULTS.....	14
6.1	Conducted Emissions	14
6.2	Radiated Emissions	15
6.3	Fundamental Emissions	42
6.4	Duty Cycle	45
6.5	6dB Bandwidth.....	46
6.6	Band Edge Compliance	48
7.	Explanatory Notes.....	50
7.1	Explanation of FAIL LIMIT 1 Statement	50
7.2	Explanation of limit line calculations for radiated measurements	50
8.	PHOTOGRAPHS.....	51
	IDENTIFYING PHOTOGRAPH OF THE EUT.....	55
9.	SIGNAL LEADS.....	56
10.	TEST EQUIPMENT CALIBRATION LIST.....	57
11.	AUXILIARY EQUIPMENT.....	58
11.1	Auxiliary equipment supplied by NXP Semiconductors	58
11.2	Auxiliary equipment supplied by RN Electronics Limited.....	58
12.	MODIFICATIONS.....	59
12.1	Modifications before test.....	59
12.2	Modifications during test	59
13.	Compliance information.....	60
14	DESCRIPTION OF TEST SITES.....	61
15	ABBREVIATIONS AND UNITS.....	62

2. Summary of Test Results

The IEEE 802.15.4 wireless controller module JN5148-T01-M04 was tested to the following standards: -

FCC 47CFR Part 15C (effective date October 1st, 2010); Class DTS Intentional Radiator

Any compliance statements are made reliant on the modes of operation as instructed to us by the Manufacturer based on their specific knowledge of the application and functionality of the equipment tested. Whilst every effort is made to assure quality of testing, type tests are not exhaustive and although no non-conformances may be found, this doesn't exclude the possibility of equipment not meeting the intentions of the standard, particularly under different conditions to those during testing.

Title	Reference	Results
1. Conducted Emissions	FCC Part 15C §15.207	NOT TESTED ¹
2. Radiated Emissions	FCC Part 15C §15.205, §15.209 & §15.247(d)	PASSED
3. Modulation Bandwidth	FCC Part 15C §15.215(c), §15.247(a)(2)	PASSED
4. Intentional Radiator Field Strength	FCC Part 15C §15.247(b)(3)	PASSED
5. Power Spectral Density	FCC Part 15C §15.247	PASSED
6. Band Edge Compliance	FCC Part 15C §15.205, §15.209 & §15.247(e)	PASSED

Notes:

¹ The digital device tested is intended to be powered from 3V DC supply (battery) and intended for modular approval. Any third party device it is incorporated into with a connection to the AC power line will require demonstration of compliance with the limits. Refer to §15.207(c) "Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to AC power lines"

This report relates to the equipment tested as identified by a unique serial number and at the time it was tested. It does not relate to any other similar equipment and performance of the product before or after the test cannot be guaranteed.

Date of Test: 24th to 27th May 2011

Test Engineer:

Approved By:
Technical Director

Customer Representative:

3. Equipment Under Test (EUT)
3.1 Equipment Specification

Applicant	NXP LAB (UK) Ltd Furnival Street Sheffield S1 4QT
Manufacturer of EUT	NXP Lab (UK) Ltd
Brand name of EUT	NXP Lab (UK) Ltd
Model Number of EUT	JN5148-T01-M04
Serial Number of EUT	1111800114
Date when equipment was received by RN Electronics	19th May 2011
Date of test:	24th to 27th May 2011
Customer order number:	GB628200012562
Visual description of EUT:	A small metal canned enclosure mounted on a PCB with an RF port. For the purpose of test, the PCB was mounted onto a battery powered motherboard.
Main function of the EUT:	A 2.4GHz (IEE802.15.4) wireless microcontroller module.
Height	6.9 mm
Width	20 mm
Depth	41 mm
Weight	0.01 kg
Voltage	3 V DC battery powered via test board pcb
Current required from above voltage source	0.13 A

3.2 EUT Configurations for testing

Frequency range	2.405 - 2.475 GHz
Normal use position	Not specified
Normal test signals	Internally generated OQPSK - 1M65G1D
Declared Power Level	+2.5dBm
Declared Channel Bandwidth	2MHz
Highest Frequencies generated/used	2.475GHz

3.3 EUT Modes


Mode	Description of mode	Used for Testing
Transmit CW 2.405GHz	Unit in constant transmit with no mod @ 2.405GHz	YES
Transmit CW 2.440GHz	Unit in constant transmit with no mod @ 2.440GHz	YES
Transmit CW 2.480GHz	Unit in constant transmit with no mod @ 2.475GHz	YES
Transmit Mod 2.405GHz	Unit in constant transmit with mod @ 2.405GHz	YES
Transmit Mod 2.440GHz	Unit in constant transmit with mod @ 2.440GHz	YES
Transmit Mod 2.480GHz	Unit in constant transmit with mod @ 2.475GHz	YES
Receive 2.405GHz	Unit in receive mode @ 2.405 GHz	YES
Receive 2.440GHz	Unit in receive mode @ 2.440 GHz	YES
Receive 2.480GHz	Unit in receive mode @ 2.475 GHz	YES
Transmit 1% duty cycle	Unit transmitting system modulation 1% duty cycle	YES

Description of ancillary equipment connected to the equipment under test, for the purpose of tests, can be found in Section 10.

Any modifications made to the EUT, whilst under test, can be found in Section 11.

This report was printed on: 09 June 2011

3.4 Emissions Configuration

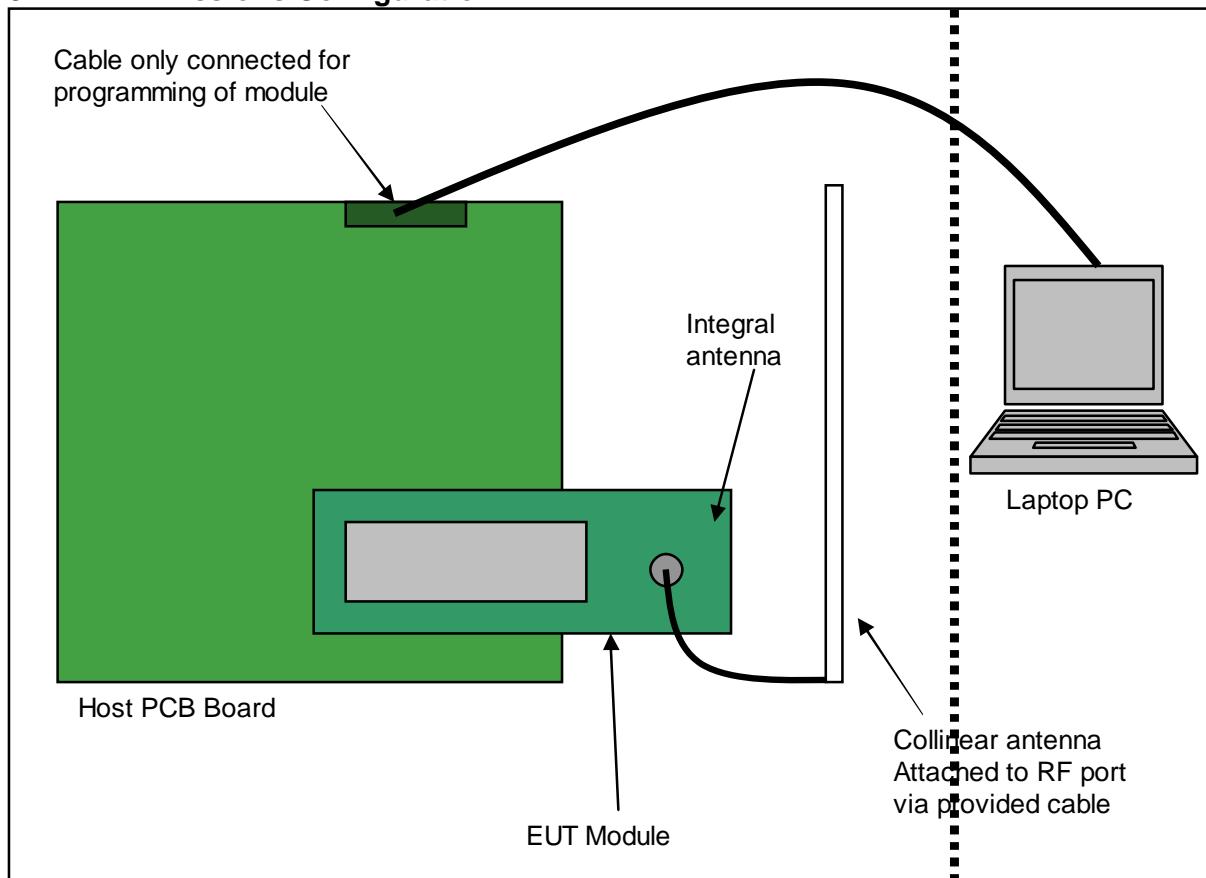

The equipment under test was supplied by 3V DC from two new batteries situated on the provided host PCB board. The battery levels were monitored throughout tests to ensure the levels did not drop below the +/- 10% required. To change channels and select the correct modes for test, a programming lead was connected and the unit programmed. The programming lead was removed for tests. Application programming software was provided by NXP Laboratories UK Ltd. A laptop provided by RN Electronics was used to program the modules.

For radiated emissions the support equipment was situated outside the chamber and the programming lead removed after each channel/mode change.

Top, Middle & Bottom channels were checked/ tested in both Transmit and Receive modes using the 16MHz clock option. All power levels were left at maximum (default setting).

Bottom channel = 2.405GHz

Middle channel = 2.440GHz

Top channel = 2.475GHz

All test were performed using the unit marked s/n 1111800114.

Description of ancillary equipment connected to the equipment under test, for the purpose of tests, can be found in Section 11.

4. Specifications

The tests were performed by RN Electronics Engineer Daniel Sims who set up the tests, the test equipment, and operated it in accordance with the **R.N. Electronics Ltd** procedures manual, FCC Part 15 and those specifications incorporated by reference into 47CFR15 (e.g. ANSI C63.4-2003).

R.N. Electronics Ltd sites M and OATS are listed with the FCC. Registration Number 293246

4.1 Deviations

None.

4.2 Tests at Extremes of Temperature & Voltage

- A permanent integral antenna was used for testing.
- A test fixture was used for testing.
- A temporary RF port was created for testing.
- The equipment external RF port was used for testing.

4.3 Measurement Uncertainties

Parameter	Uncertainty
Transmitter Tests	
Conducted RF power	<± 1.0 dB
Spectral power density	<± 1.5 dB
Bandwidth	<± 1.9 %
Radiated RF Power	<± 3.5 dB
Radiated Spurious Emissions	<± 3.4 dB
H-Field Emissions	<± 2.8 dB

5. Tests, Methods and Results
5.1 Conducted Emissions

NOT APPLICABLE.

The digital device tested is intended to be powered from 3V DC supply (battery) and intended for modular approval. Any third party device it is incorporated into with a connection to the AC power line will require demonstration of compliance with the limits. Refer to §15.207(c) "Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to AC power lines"

5.2 Radiated Emissions

5.2.1 Test Methods

Test Requirements	FCC Part 15C, Reference (15.209)
Test Method:	ANSI C63.4, Reference (8.)

5.2.1.1 Configuration of EUT

The EUT was placed on a 0.8 metres high turntable. The front edge of the EUT was initially positioned facing the antenna. The EUT was measured at a distance of 3 metres. The EUT was rotated in all three orthogonal planes. Radiated Emissions testing was performed with new batteries.

5.2.1.2 Test Procedure

Tests were made in accordance with FCC Part 15 using the measuring equipment noted below.

Below 30MHz, measurements were made in a semi-anechoic chamber (pre-scan) with final measurements on an OATS without a ground plane. The antenna was placed 1m above the ground. The equipment and the antenna were rotated 360° to record the worst case emissions.

30MHz - 1GHz, measurements were made on a site listed with the FCC. The equipment was rotated 360° and the antenna scanned 1 – 4 metres in both horizontal and vertical polarisations to record the worst case emissions.

Above 1GHz, measurements were made in a semi-anechoic chamber with appropriate absorbing material for use in this range. The antenna was placed 1m above the ground in line with the EUT, which was rotated through 360° to record the worst case emissions.

At least 6 signals within 20dB and all signals within 10dB of the limit were investigated.

5.2.2 Test results

Tests were performed using Test Site M.

Test Environment: Temperature: 17-22°C Humidity: 36-50%

Analyser plots for the Quasi-Peak / Average values as applicable and any table of signals within 20dB of the limit line can be found in Section 6.2 of this report. Band Edge Compliance plots can be found in section 6.6 of this report.

These show that the **EUT** has **PASSED** this test.

5.2.2.1 Test Equipment used

E410, E411, E412, TMS933, E268, E342, E429, TMS78, TMS79, TMS82

See Section 10 for more details

5.3 Intentional Radiator Field Strength & Peak Conducted Power

5.3.1 Test Methods

Test Requirements	FCC Part 15C, Reference (15.247)
Test Method:	FCC Part 15C, Reference (15.247) ANSI C63.10, Reference (6.10.2.1 a))

5.3.1.1 Configuration of EUT

The Integral antenna EUT was placed on a 0.8 metres high turntable. The front edge of the EUT was initially positioned facing the antenna. The EUT was measured at a distance of 3 metres. The antenna was scanned 1-4m in height in both Horizontal and Vertical polarisations. The EUT was rotated in all three orthogonal planes. The conducted EUT was measured on a bench using a spectrum analyser connected to the RF port.

5.3.1.2 Test Procedure

Tests were made in accordance with FCC Part 15 using the measuring equipment noted below.

Measurements were made in a semi-anechoic chamber and on a test bench.

The EUT and collinear antenna were rotated 360° to record the maximised emission.

5.3.2 Test results

Test Environment: Temperature: 17-25°C Humidity: 32-46 %

Any Analyser plots can be found in Section 6.3 of this report.

The maximised field strength measured was:-

Collinear Antenna results

Frequency (MHz)	Power (3MHz RBW) (dBuV/m @ 3 metres)	Power (100kHz RBW) (dBuV/m @ 3 metres)
2405	116.8	112.8
2440	115.7	111.3
2475	117.0	112.9

Conducted unit results

Frequency (MHz)	Power (dBm) (3MHz RBW)
2405	+16.5
2440	+16.4
2475	+16.2

Limits: 1Watt (+30dBm).

These results show that the EUT has **PASSED** this test.

5.3.2.1 Test Equipment used

TMS82, E268, E410, E411, E412, E342, E313, E434

See Section 10 for more details

5.4 Duty Cycle

Test not applicable. However, a basic duty cycle measurement was made in order to ascertain any duty cycle corrections required to be applied to the test results.

According to 15.35(b): the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

As peak emissions were no more than 13.4dB above the average emissions measured and the worst case average emission measured is +2.3dB above the permitted average emission limit then the condition for peak emissions is met.

According to 15.35(c): when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

For purposes of test the equipment was operated with the transmitter continuously on. For a 1% duty cycle, the power measured would be reduced by $20 \log (0.01) = 40\text{dB}$. For a 10% duty cycle, the power measured would be reduced by $20 \log (0.10) = 20\text{dB}$. According to the declared duty cycle, therefore, the emissions observed are well below the limit after averaging for pulse rate.

Duty Cycle

In normal operation the equipment employs pulsing at a variable rate, depending on the application. The manufacturer has declared a duty cycle of 1% and quotes IEEE 802.15.4: "The specifications of IEEE Std 802.15.4-2003 are tailored for applications with low power and low data rates (a maximum of 250 kb/s and down to 20 kb/s). Typical applications for IEEE 802.15.4 devices are anticipated to run with low duty cycles (under 1%). This will make IEEE 802.15.4 devices less likely to cause interference to other standards".

IEEE 802.15.4 also quotes a nominal packet length of 0.01472ms (40 data bytes) and for <10% duty cycle restrictions up to 6 packets per 100ms.

A measurement of the EUT operating at the nominal 1% rate is shown in the plots section 6.4.

5.6 Maximum Spectral Power Density

5.6.1 Test Methods

Test Requirements	FCC Part 15C, Reference (15.247)
Test Method:	FCC Part 15C, Reference (15.247) KDB558074, PSD Option 1

5.6.1.1 Configuration of EUT

The EUT was tested on a bench via the RF port.

5.6.1.2 Test Procedure

Tests were made in accordance with FCC Part 15 using the measuring equipment noted below. The peak of the power envelope was found and zoomed in on; the spectrum analyser was then set to measure at a slow sweep rate, per KDB558074, in 3kHz bandwidth.

5.6.2 Test results

Tests were performed using Test Site A.

Temperature of test Environment: 19°C

Channel	Duty cycle	Result (dBm/3kHz)
Bottom	100%	+4.0
Middle	100%	+3.3
Top	100%	+2.3

Limits: +8dBm/3kHz.

These results show that the **EUT** has **PASSED** this test.

5.6.2.1 Test Equipment used

E342, E313, E434

See Section 10 for more details.

5.7 6 dB Bandwidth

5.7.1 Test Methods

Test Requirements	FCC Part 15C, Reference (15.247)
Test Method:	FCC Part 15C, Reference (15.247) ANSI C63.10, Reference (6.9.1)

5.7.1.1 Configuration of EUT

The EUT was tested on a bench via the RF port.

5.7.1.2 Test Procedure

Tests were made in accordance with FCC Part 15 using the measuring equipment noted below.

5.7.2 Test results

Tests were performed using Test Site K.

Temperature of test Environment: 21°C

Analyser plots for the 6dB bandwidth can be found in Section 6.5 of this report.

Channel	Result	Plot reference
Bottom	1.58MHz	J4717-1, Bottom channel 6dB BW (OBW) 100k RBW
Middle	1.61MHz	J4717-1, Middle channel 6dB BW (OBW) 100k RBW
Top	1.65MHz	J4717-1, Top channel 6dB BW (OBW) 100k RBW

Limits: > 500kHz BW.

These results show that the EUT has **PASSED** this test.

5.7.2.1 Test Equipment used

E412, E313

See Section 10 for more details.

5.8 Band Edge Compliance

5.8.1 Test Methods

Test Requirements	FCC Part 15C, Reference (15.215 and 15.247)
Test Method:	FCC Part 15C, Reference (15.215) ANSI C63.10, Reference (6.9.2)

5.8.1.1 Configuration of EUT

The EUT was placed on a 0.8 metres high turntable. The front edge of the EUT was initially positioned facing the antenna. The EUT was measured at a distance of 3 metres.

5.8.1.2 Test Procedure

Tests were made in accordance with FCC Part 15 using the measuring equipment noted below.

5.8.2 Test results

Tests were performed using Test Site **B**.

Temperature of test Environment: 22°C

Analyser plots for the Band Edge Compliance can be found in Section 6.5 and 6.6 of this report. These show the 20dBc requirement of 15.247(d) are met at the band edges of 2400 and 2483.5 MHz.

The following tables list the field strengths observed in the adjacent restricted bands, which are required to meet the tighter 15.209 limits:

Channel	Band edge PK reading (dBuV/m)	Band edge AV reading (dBuV/m)	Plot reference
Bottom	60.0	48.1	J4717-1, band edge 2.405GHz chan 1M RBW PK & AV
Top	67.4	56.0*	J4717-1, band edge 2.475GHz chan 1M RBW PK & AV

*The band edge readings were performed with a peak detector (max held plot) and with the EUT set in a constant 100% transmit state. Manufacturer declares EUT would not be used with a duty cycle greater than 1%. For a 1% duty cycle, the power measured would be reduced by $20 \log (0.01) = 40$ dB. According to the declared duty cycle, therefore, the emissions observed are well below the limit after averaging for pulse rate.

n.b. For a 10% duty cycle, the power measured would be reduced by $20 \log (0.10) = 20$ dB; still well below the limit.

Limits: AV = 54dBuV/m at band edges
PK = 74dBuV/m at band edges

These results show that the **EUT** has **PASSED** this test.

5.8.2.1 Test Equipment used

E412, E342, TMS82, E268,


See Section 10 for more details.

6. Plots and Results
6.1 Conducted Emissions


Test not applicable.

The digital device tested is intended to be powered from 3V DC supply (battery) and intended for modular approval. Any third party device it is incorporated into with a connection to the AC power line will require demonstration of compliance with the limits. Refer to §15.207(c) "Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to AC power lines"


6.2 Radiated Emissions
Middle channel plots shown only.

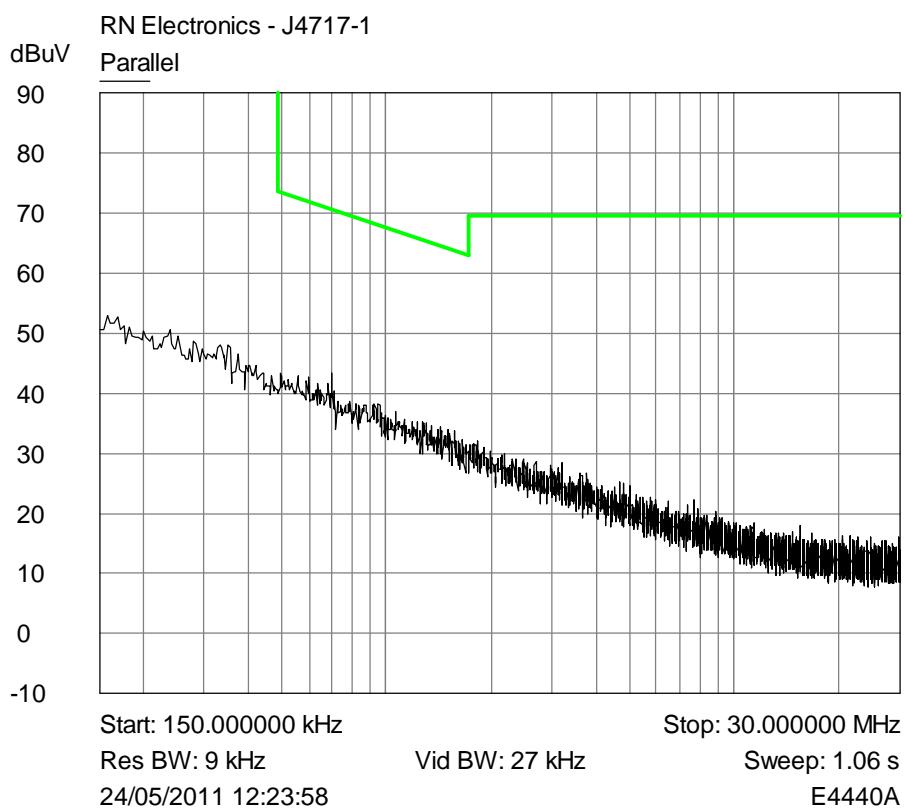


Plot of peak Parallel emissions 150kHz - 30MHz against the quasi-peak limit line.

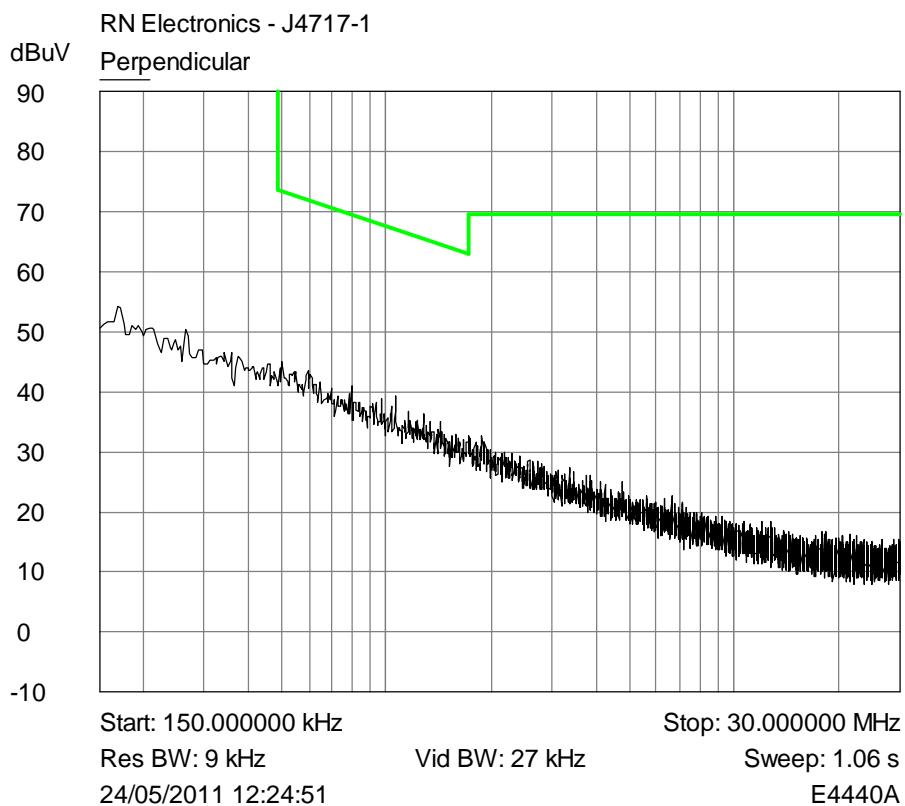


Plot of peak Perpendicular emissions 150kHz - 30MHz against the quasi-peak limit line.

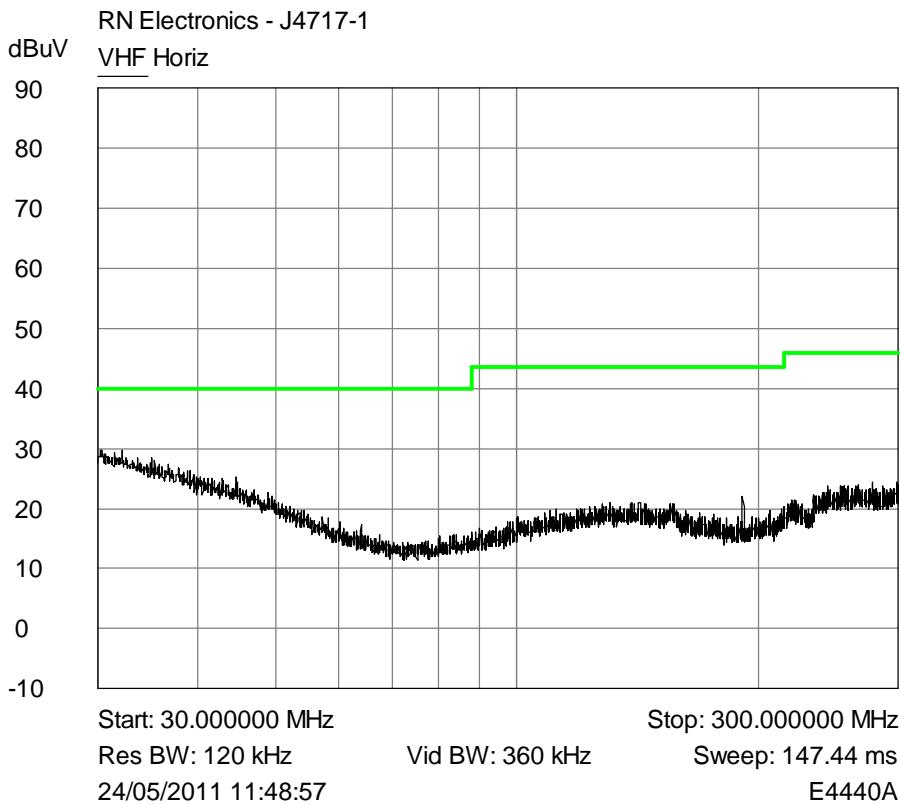


Plot of peak horizontal emissions 30MHz - 300MHz against the quasi-peak limit line.

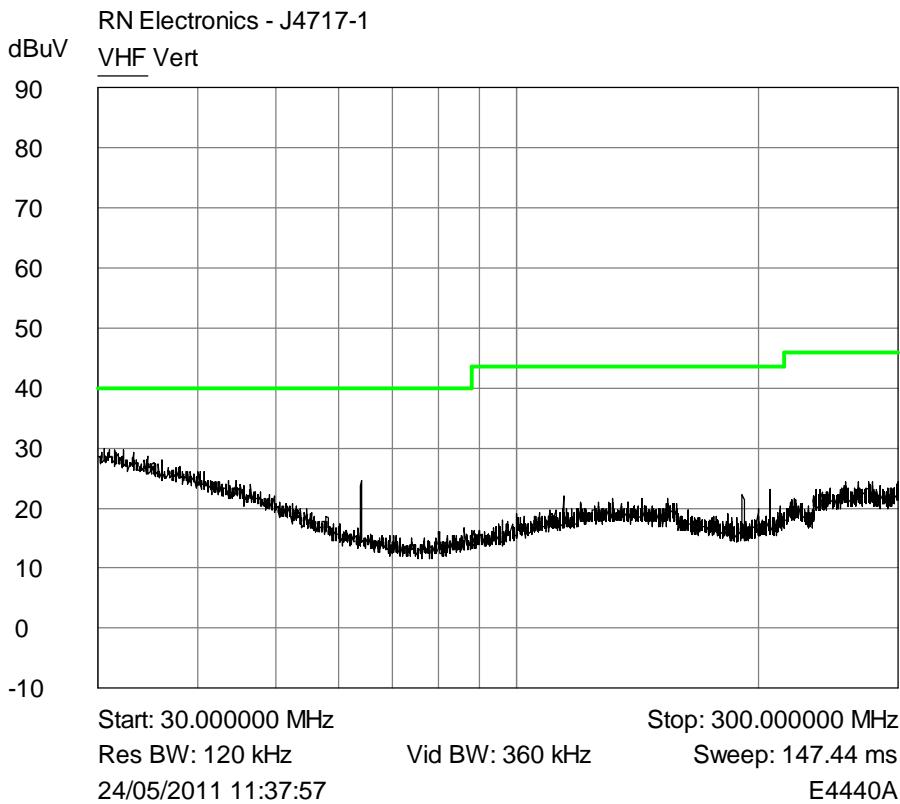

Plot of peak vertical emissions 30MHz - 300MHz against the quasi-peak limit line.

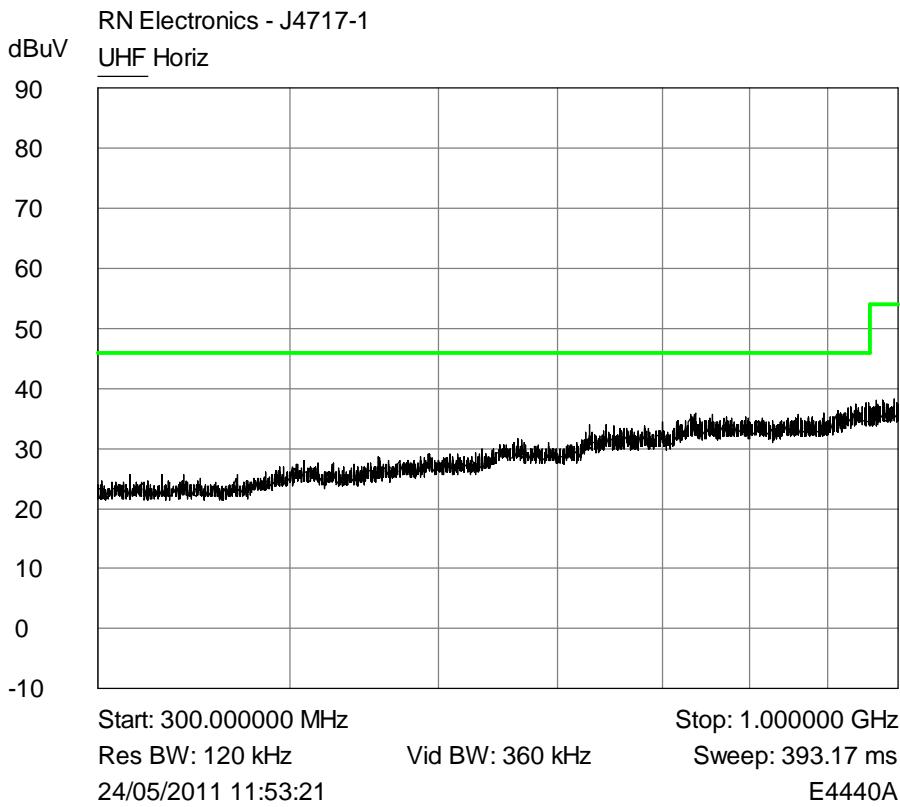

Plot of peak horizontal emissions 300MHz - 1GHz against the quasi-peak limit line.

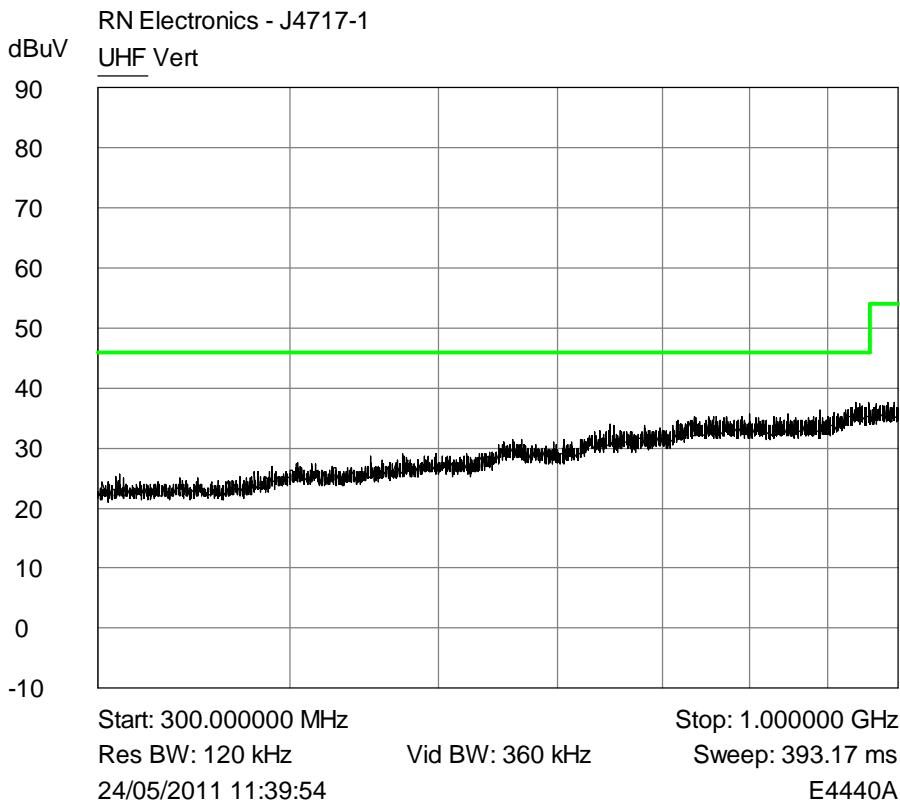

Plot of peak vertical emissions 300MHz - 1GHz against the quasi-peak limit line.

Table of signals measured below 1GHz.

Horizontal

No signals within 20dB on top, mid or bottom channels.

Vertical

Bottom channel

Signal No.	Freq (MHz)	Peak Amp (dBuV)	QP Amp (dBuV)	QP - Lim1 (dB)
1	63.999	25.2	23.5	-16.5



Middle channel



Signal No.	Freq (MHz)	Peak Amp (dBuV)	QP Amp (dBuV)	QP - Lim1 (dB)
1	63.999	25.2	23.6	-16.4



Top channel



Signal No.	Freq (MHz)	Peak Amp (dBuV)	QP Amp (dBuV)	QP - Lim1 (dB)
1	63.999	25.3	23.6	-16.4


Plots of Average horizontal emissions 1GHz - 25GHz against the Average limit line.

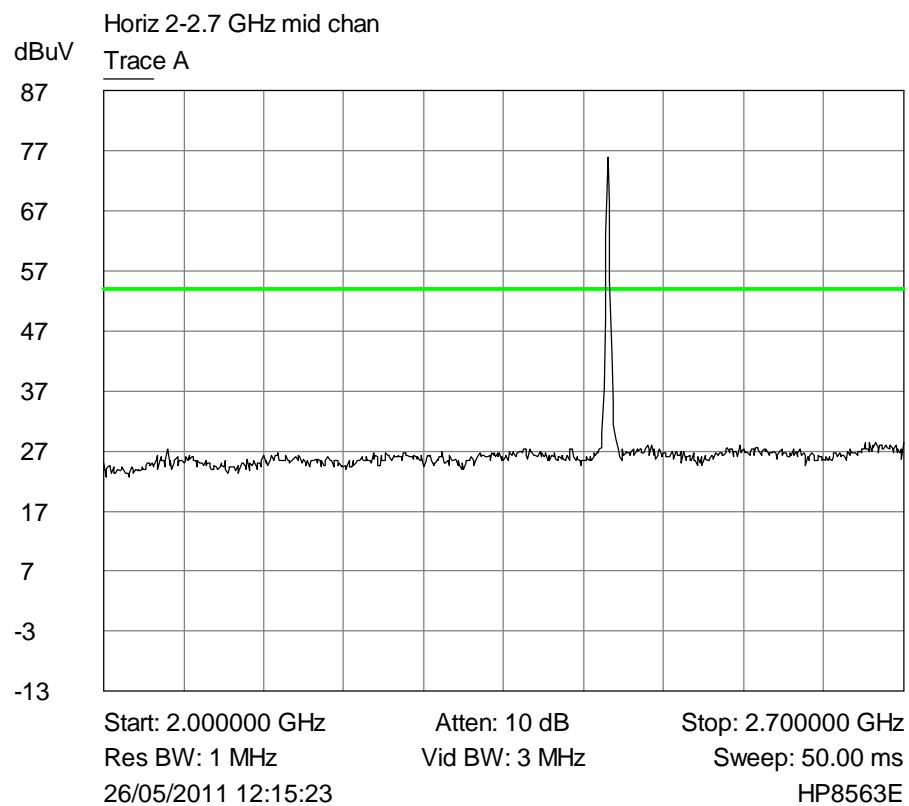
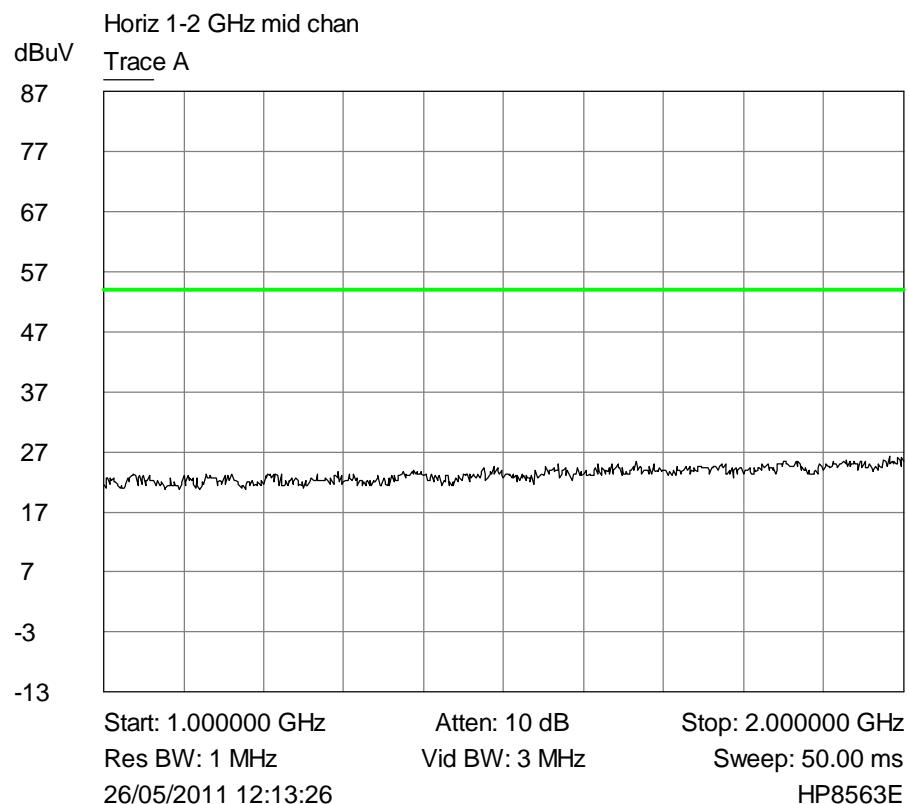


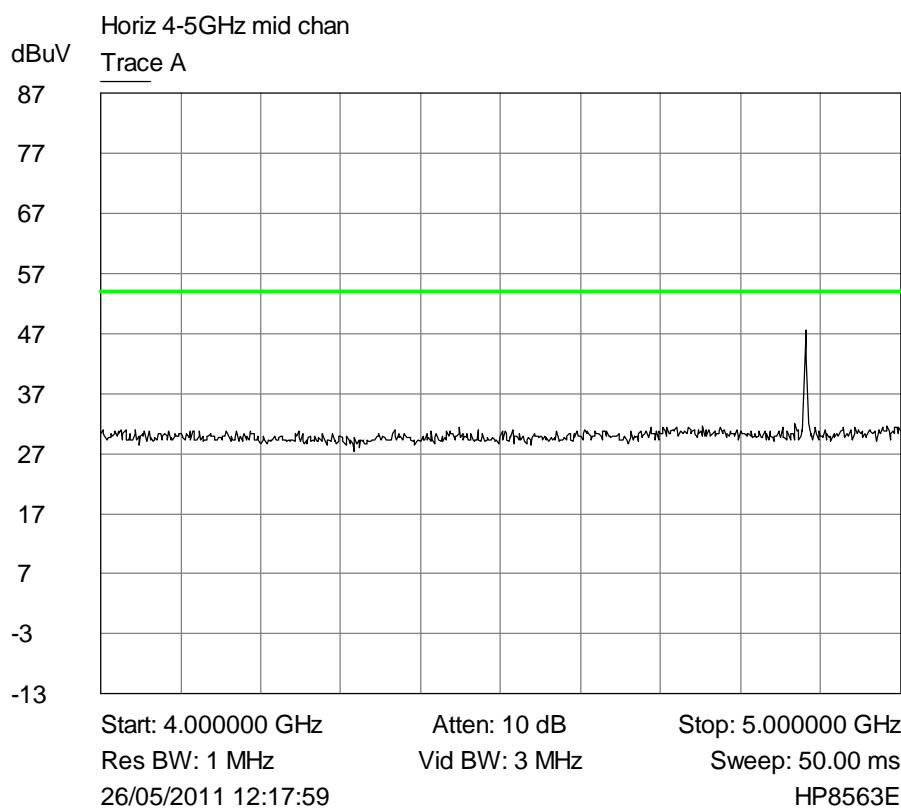
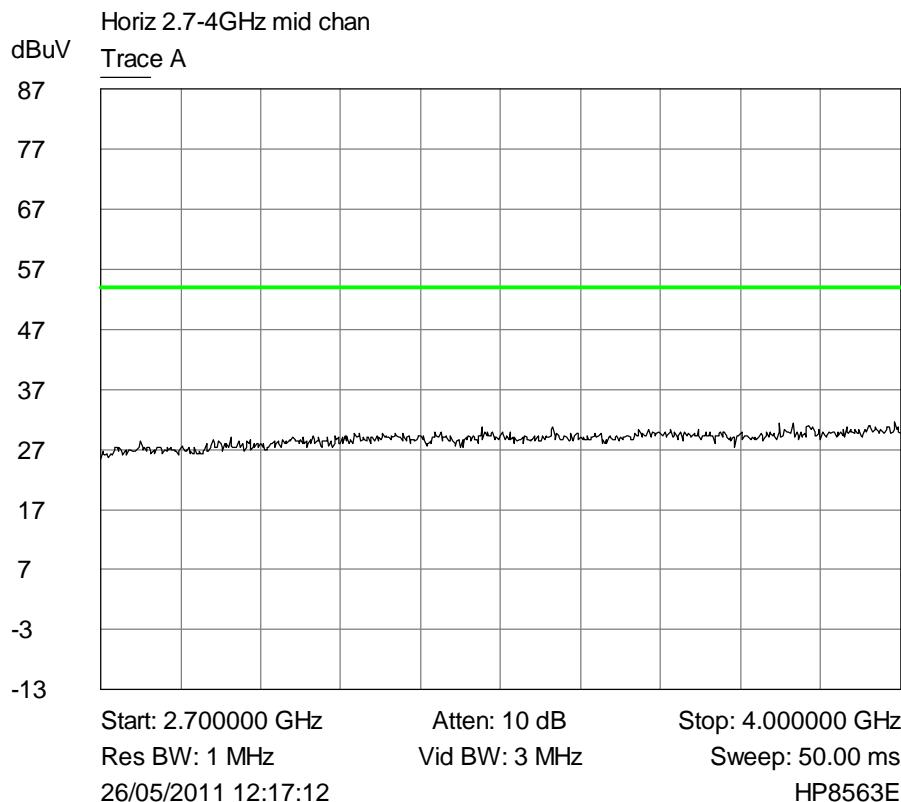


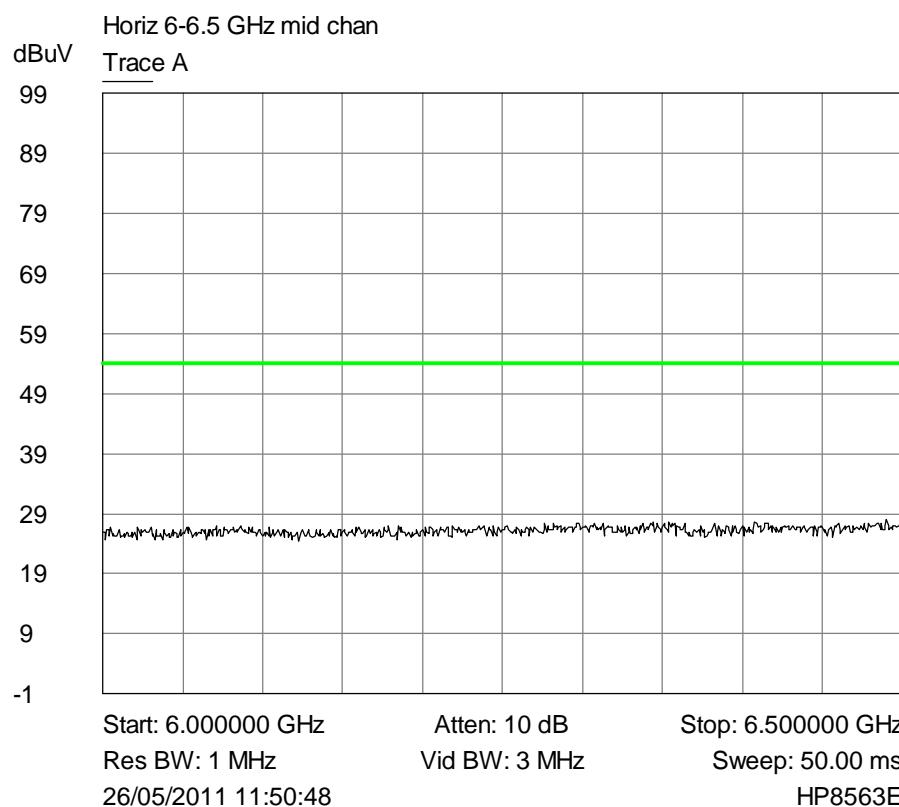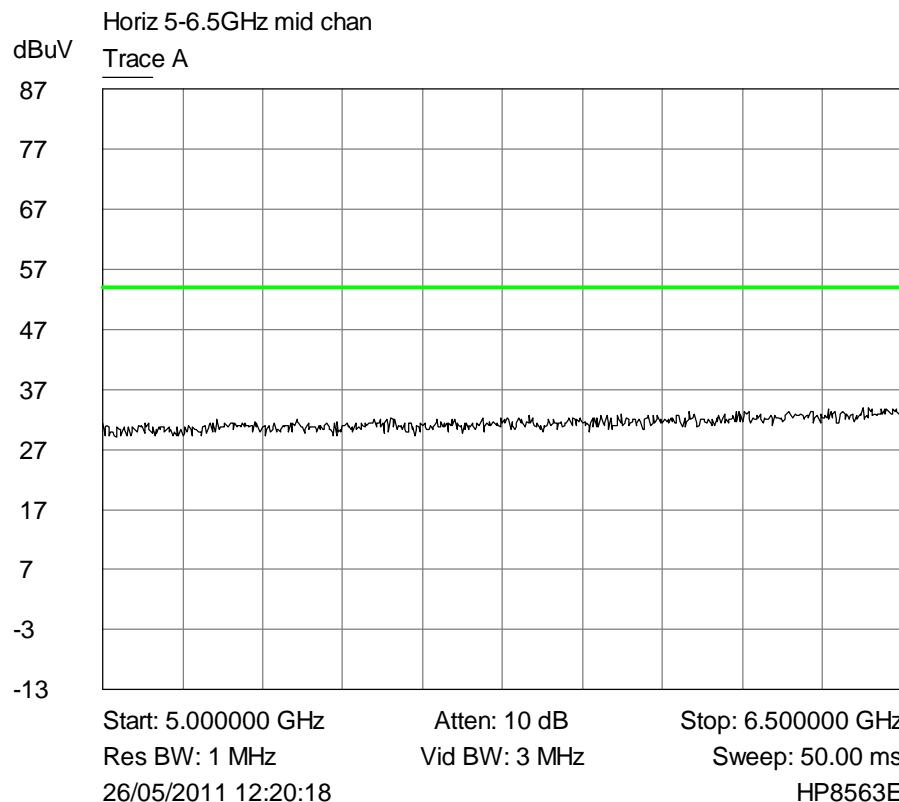


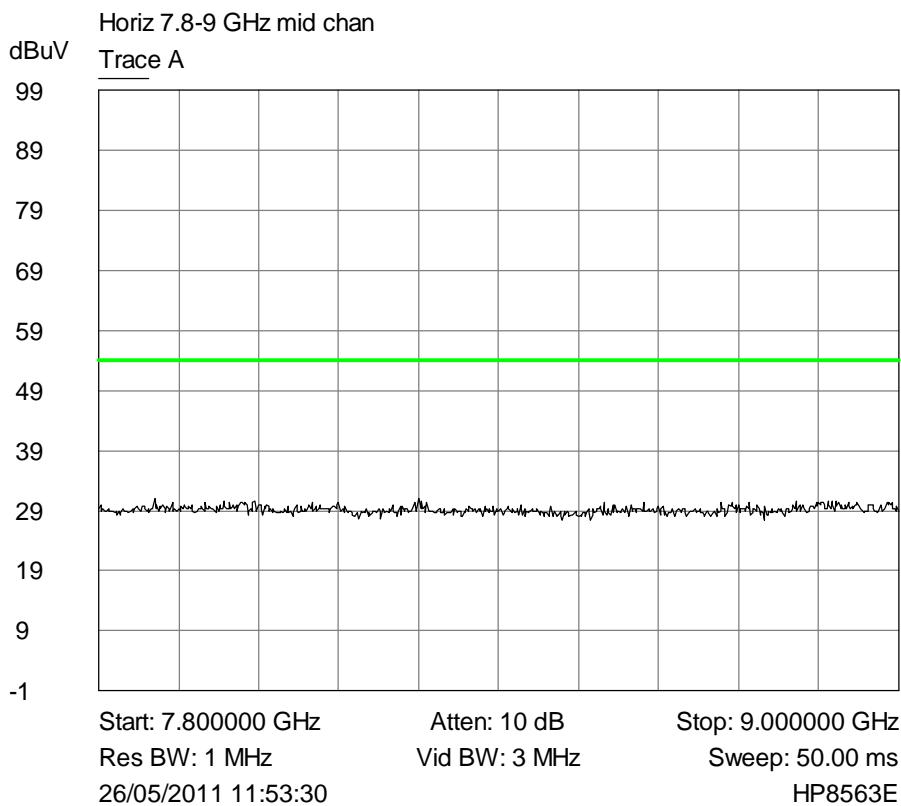
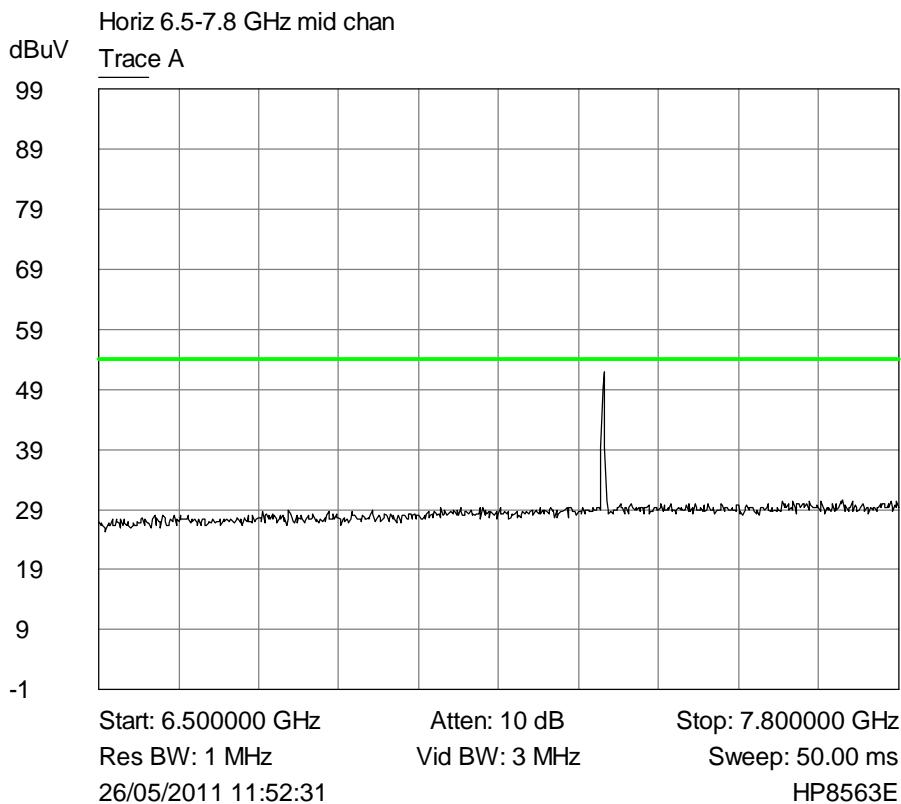


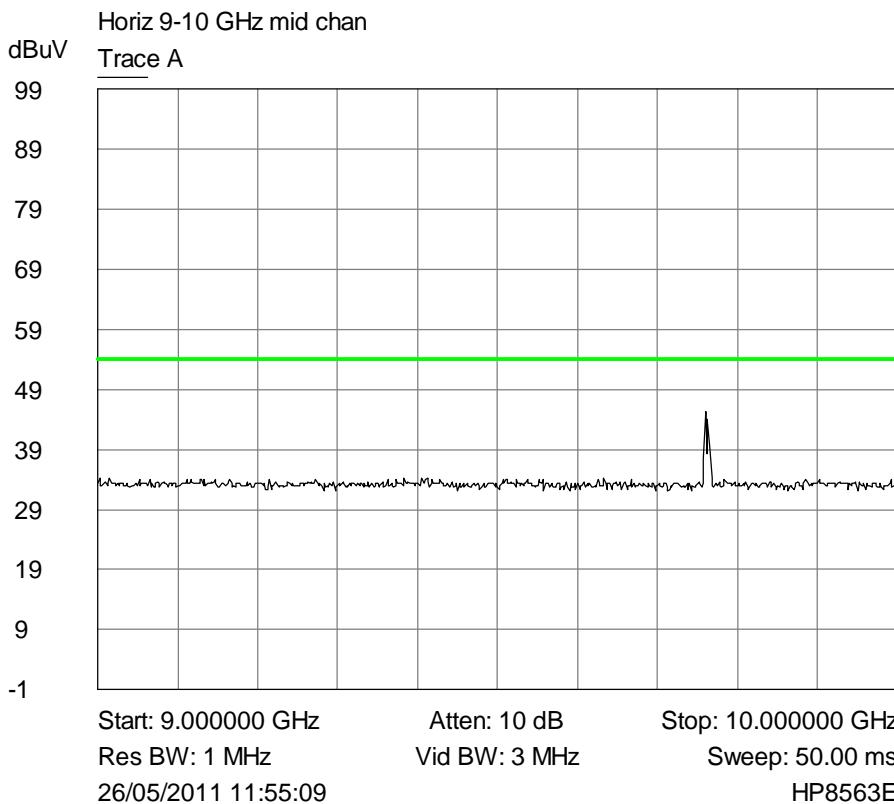

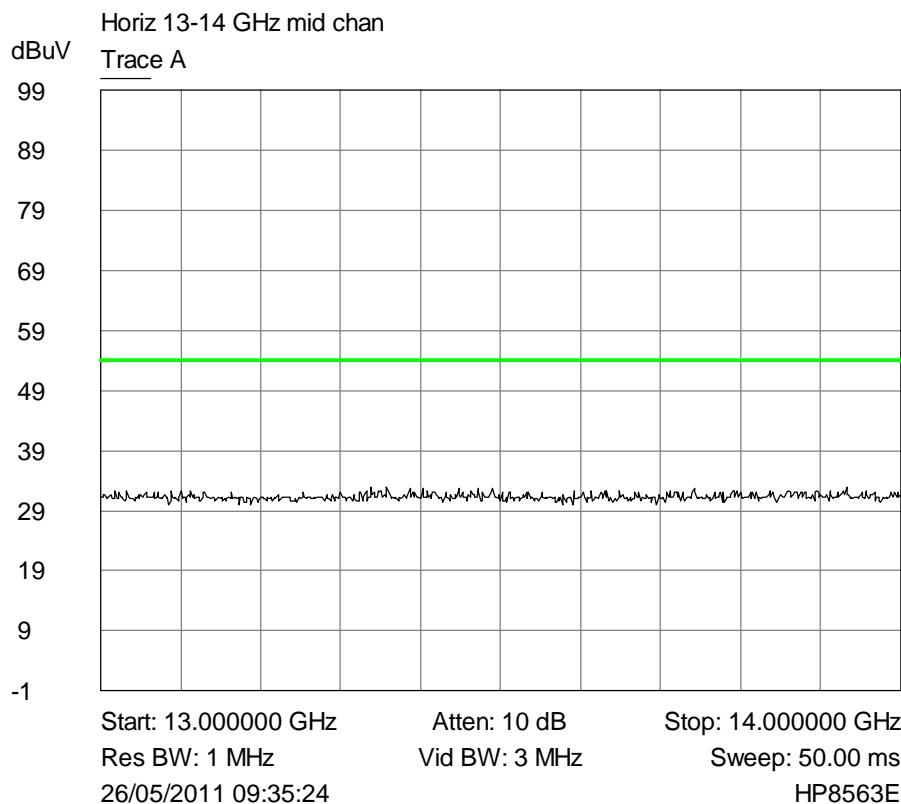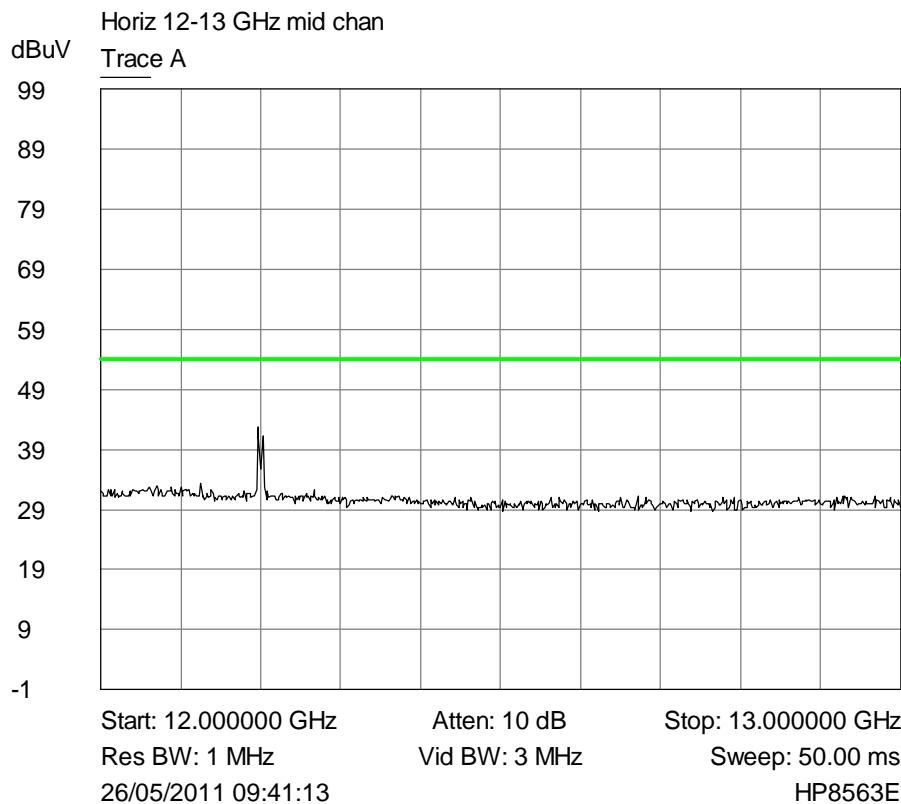

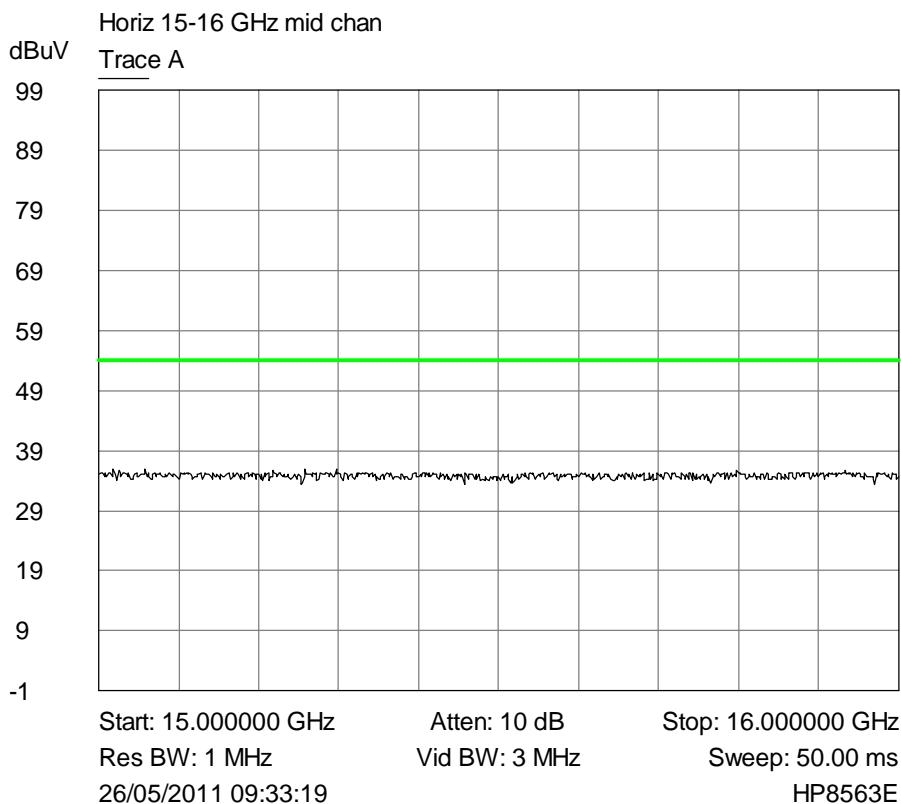
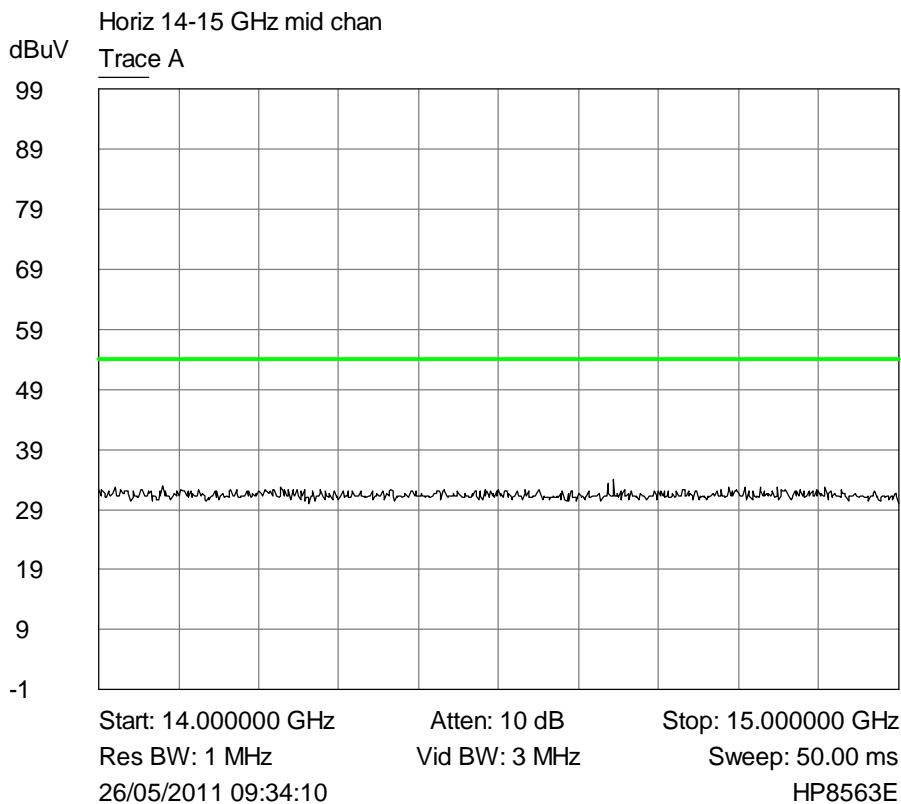



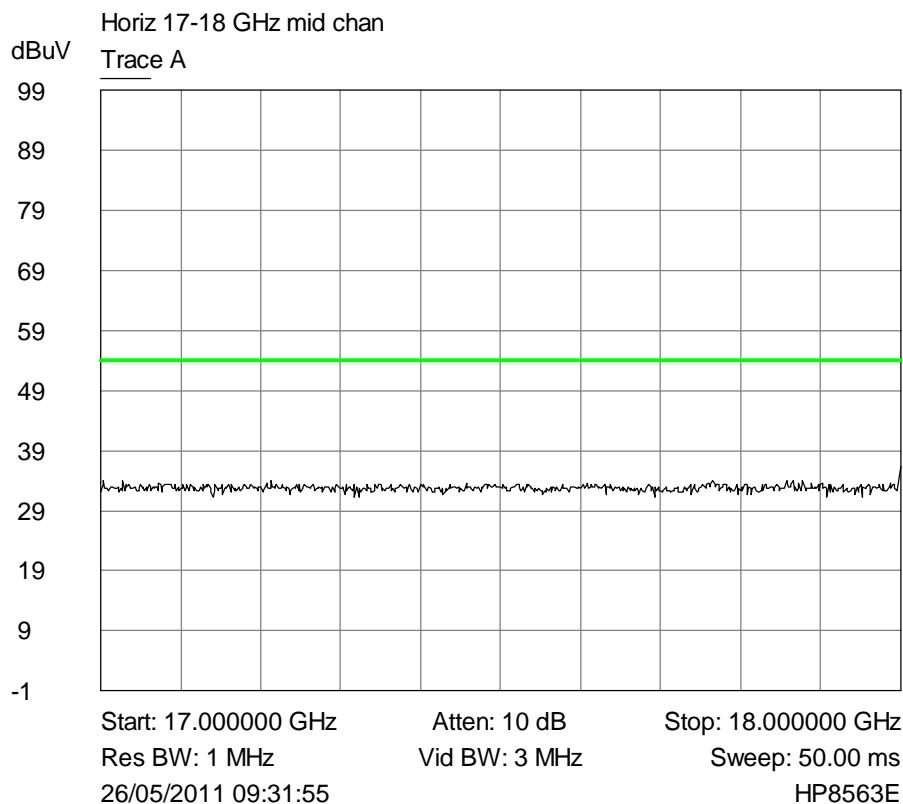


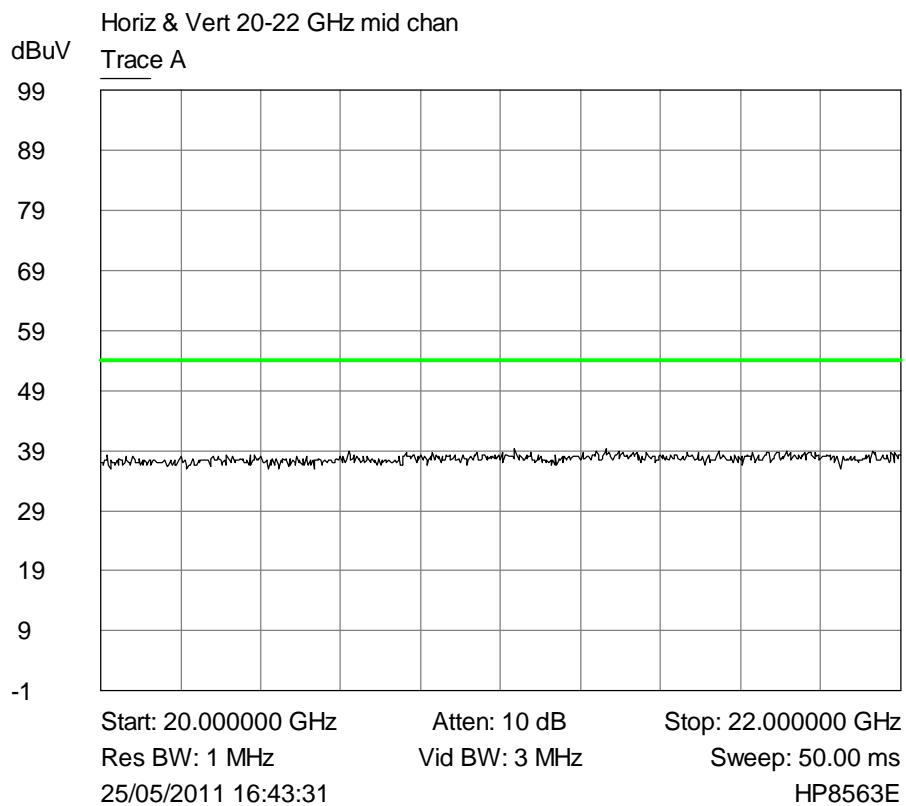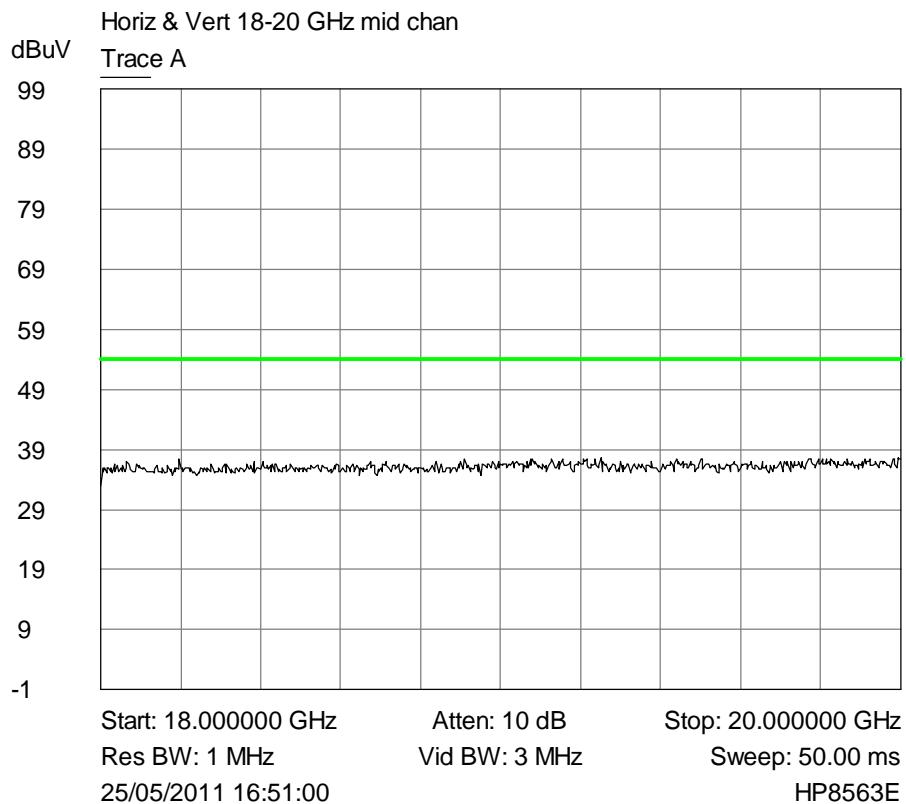




Plot of Average Vertical emissions 1GHz - 25GHz against the Average limit line.

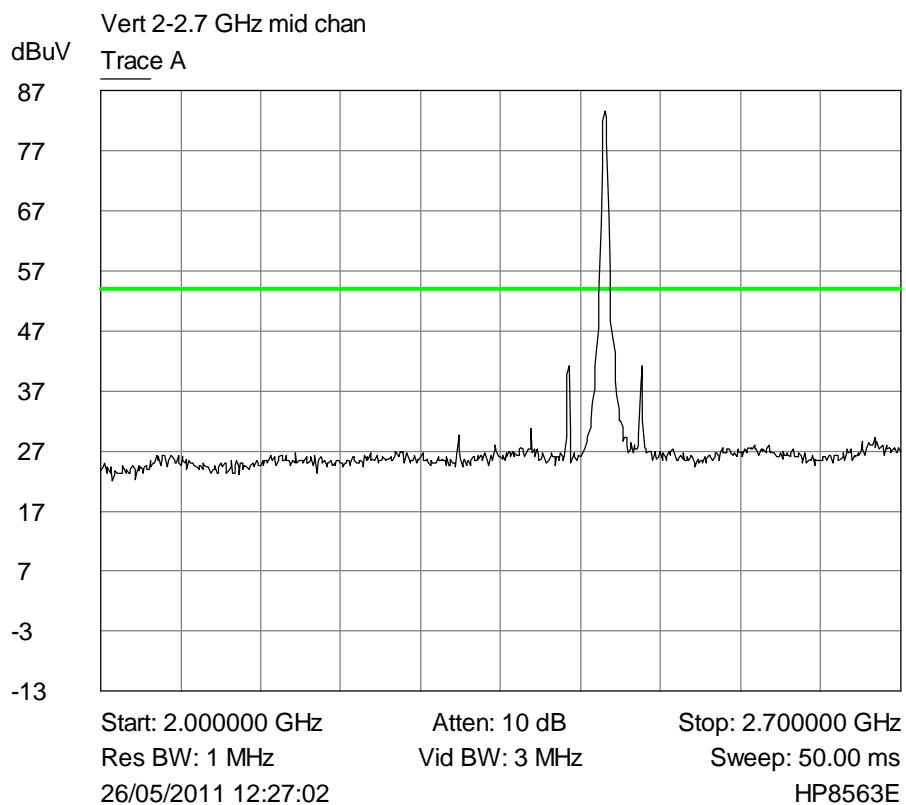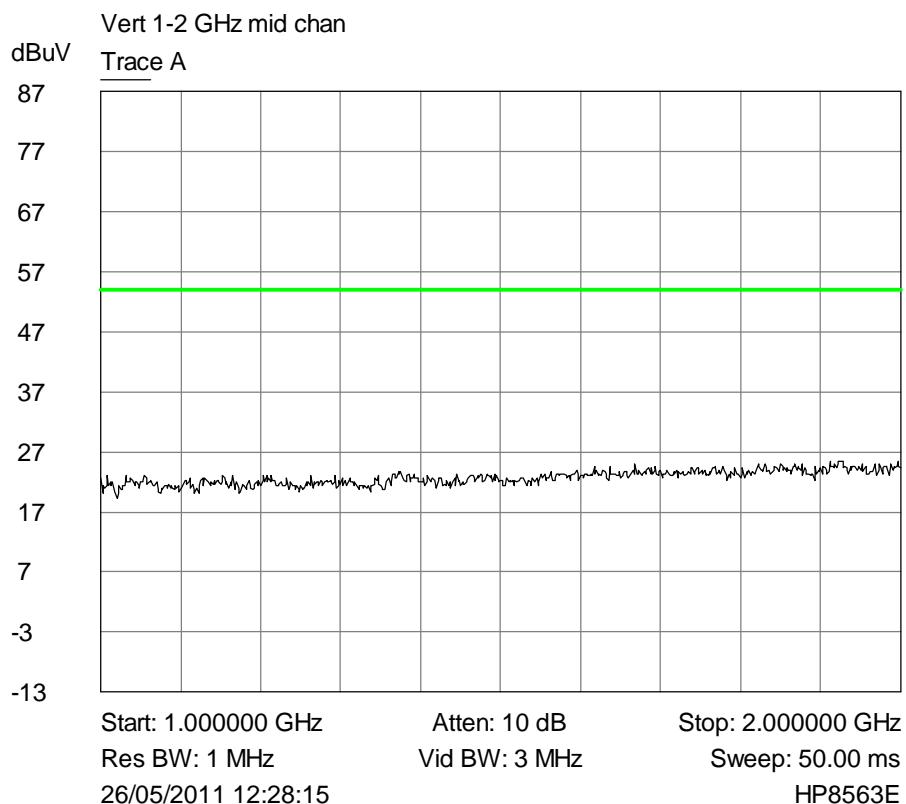

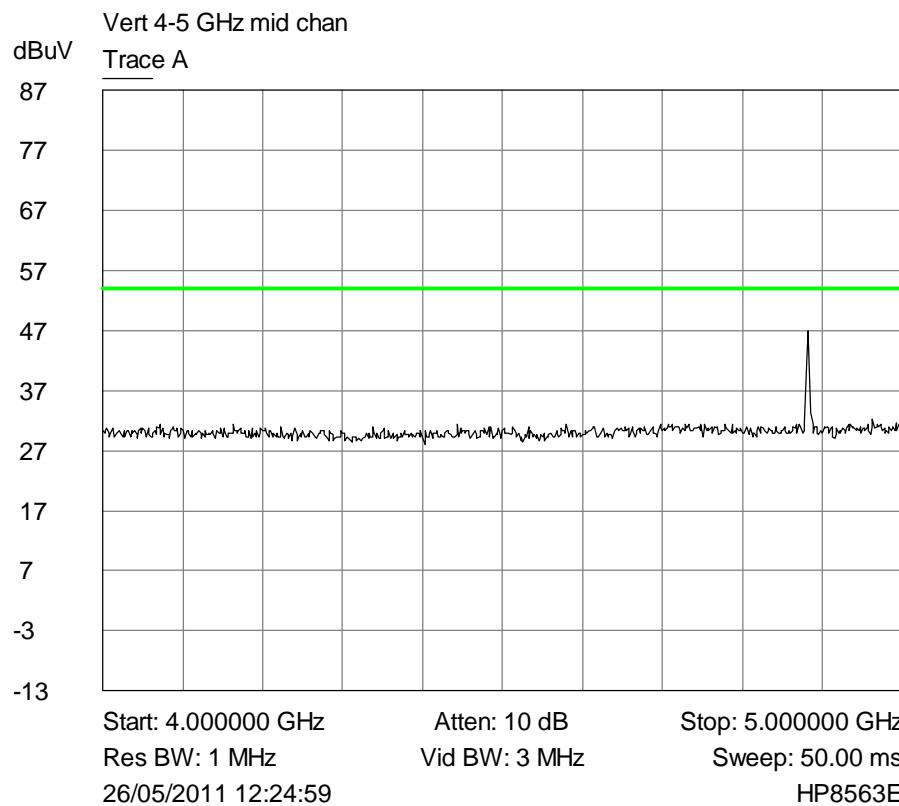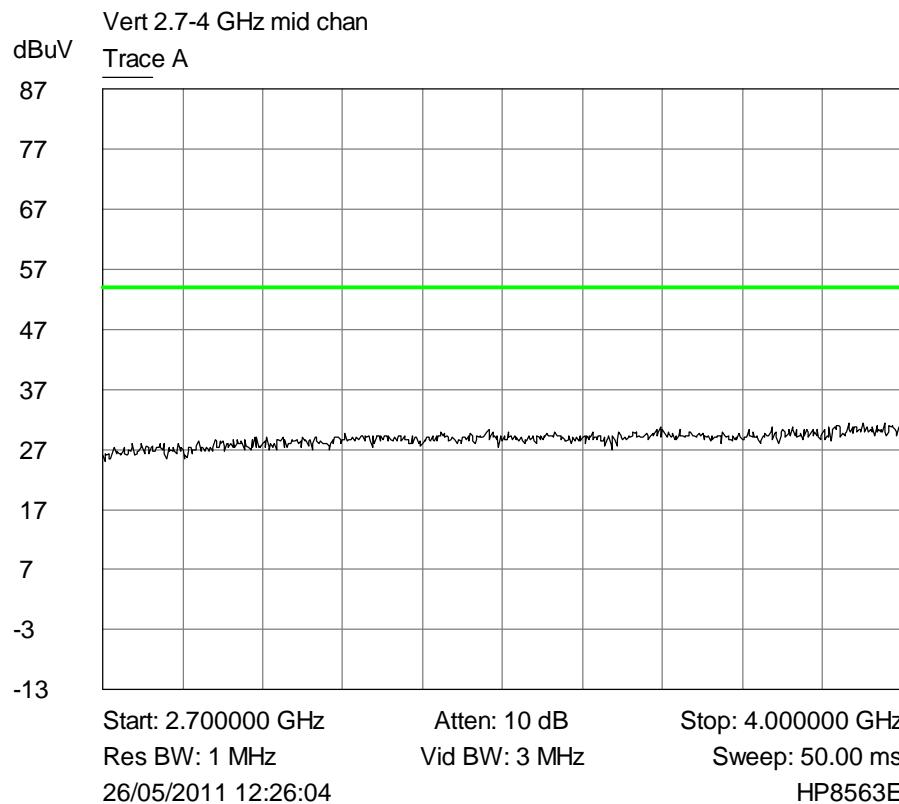

Vert 5-6.5GHz mid chan

dBuV Trace A

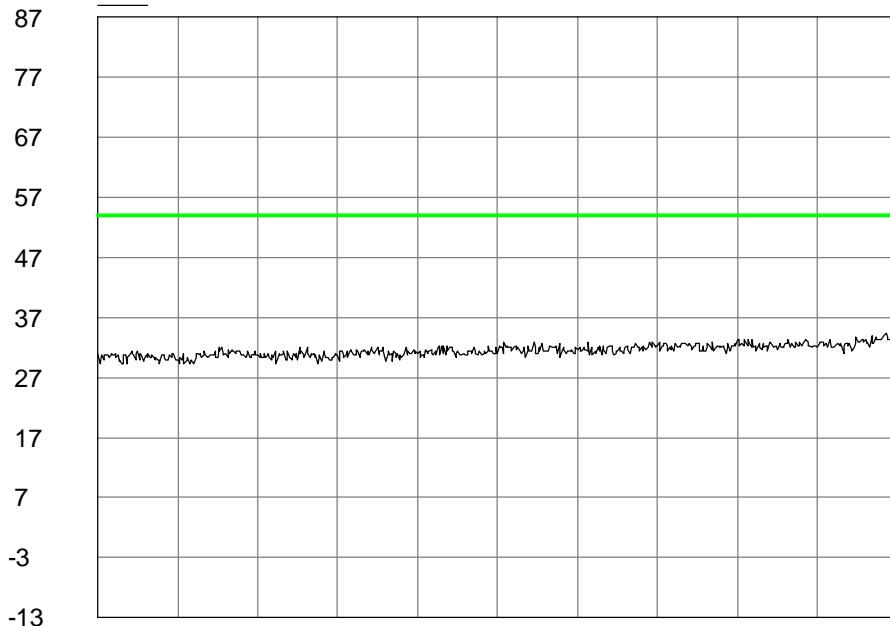

Start: 5.000000 GHz

Res BW: 1 MHz

26/05/2011 12:24:35

Atten: 10 dB

Vid BW: 3 MHz


Stop: 6.500000 GHz

Sweep: 50.00 ms

HP8563E

Vert 6-6.5GHz mid chan

dBuV Trace A

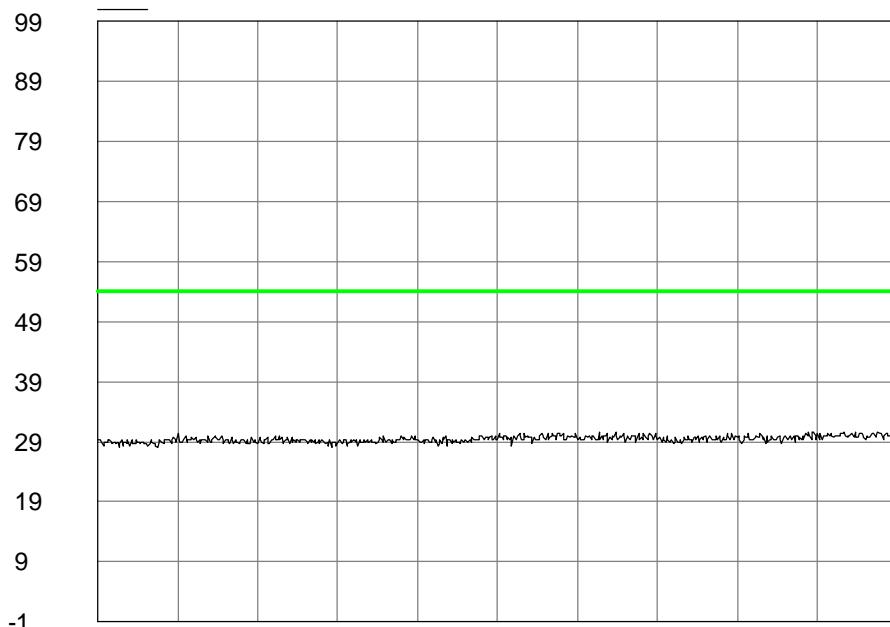

Start: 6.000000 GHz

Res BW: 1 MHz

26/05/2011 11:36:20

Atten: 10 dB

Vid BW: 3 MHz


Stop: 6.500000 GHz

Sweep: 50.00 ms

HP8563E

Vert 6.5-7.5 GHz mid chan

dBuV Trace A

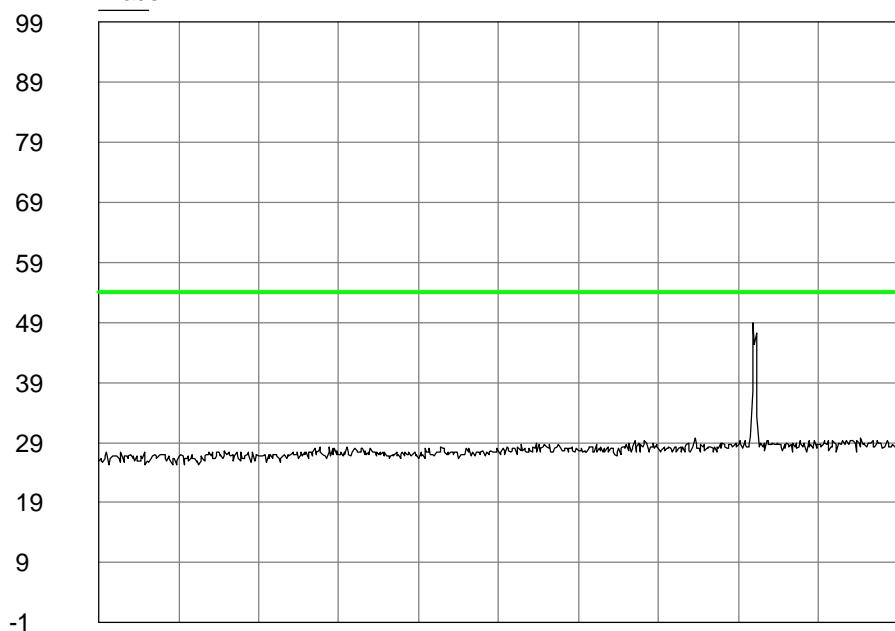

Start: 6.500000 GHz

Res BW: 1 MHz

26/05/2011 11:34:39

Atten: 10 dB

Vid BW: 3 MHz


Stop: 7.500000 GHz

Sweep: 50.00 ms

HP8563E

Vert 6.5-7.8 GHz mid chan

dBuV Trace A

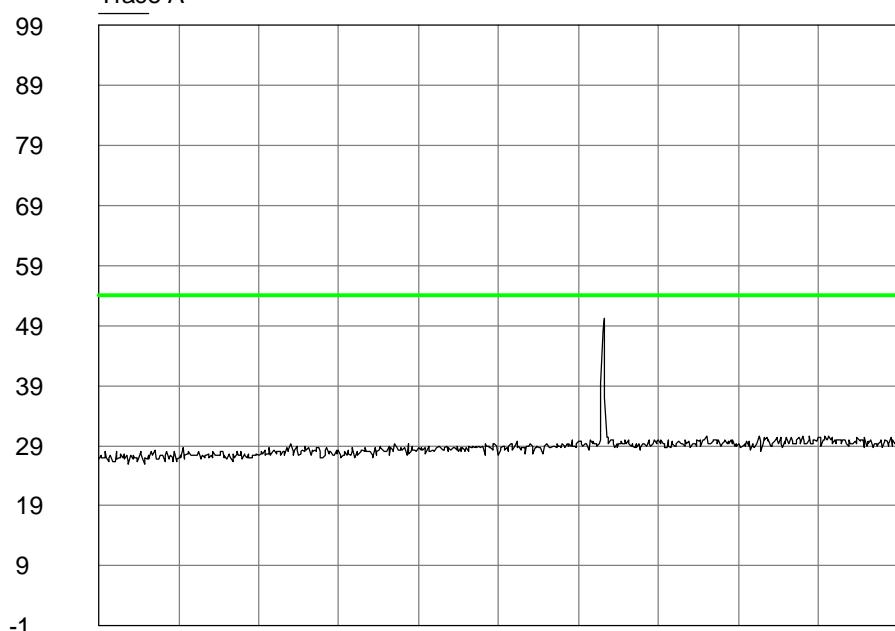

Start: 6.500000 GHz

Res BW: 1 MHz

26/05/2011 11:38:20

Atten: 10 dB


Vid BW: 3 MHz

Stop: 7.800000 GHz

Sweep: 50.00 ms


HP8563E

Vert 7.8-9 GHz mid chan
dBuV Trace A


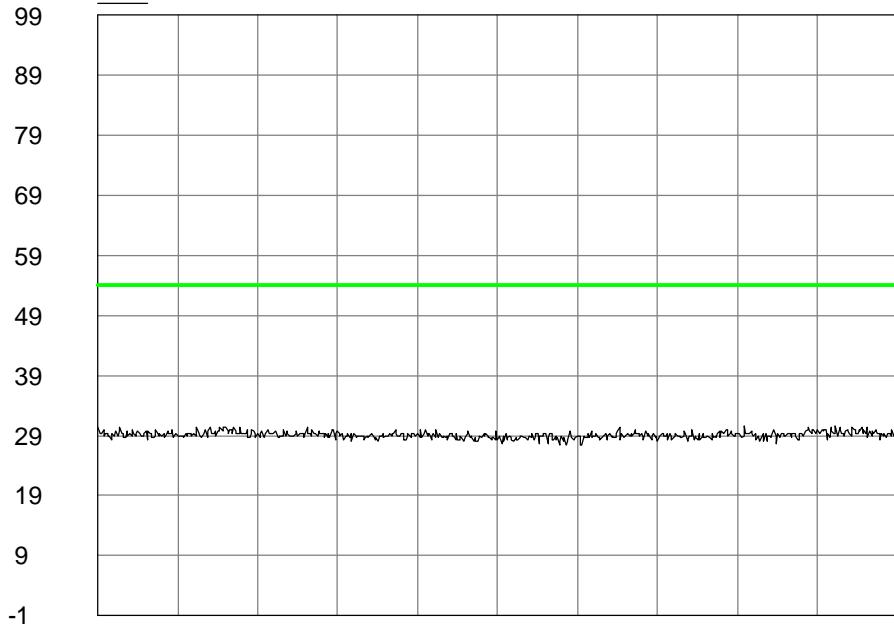


Start: 7.800000 GHz Atten: 10 dB Stop: 9.000000 GHz
Res BW: 1 MHz Vid BW: 3 MHz Sweep: 50.00 ms
26/05/2011 11:39:39 HP8563E

Vert 9-10 GHz mid chan
dBuV Trace A

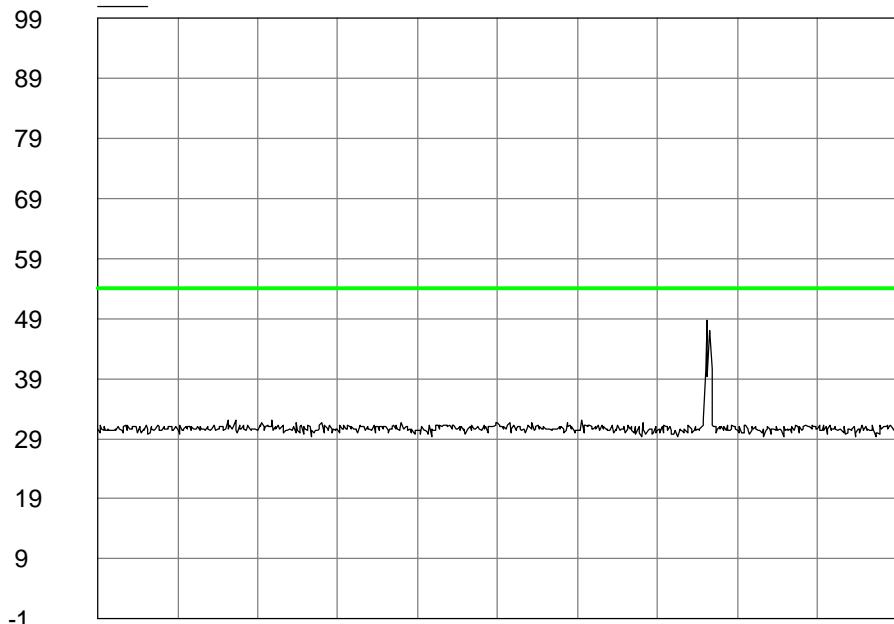


Start: 9.000000 GHz Atten: 10 dB Stop: 10.000000 GHz
Res BW: 1 MHz Vid BW: 3 MHz Sweep: 50.00 ms
26/05/2011 11:41:44 HP8563E

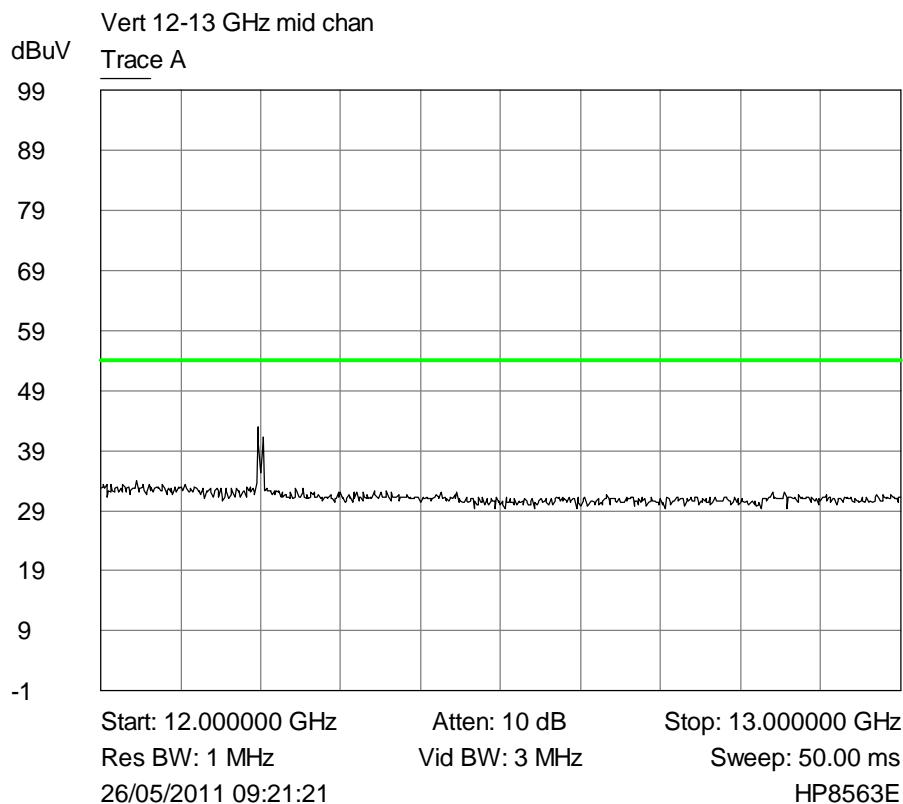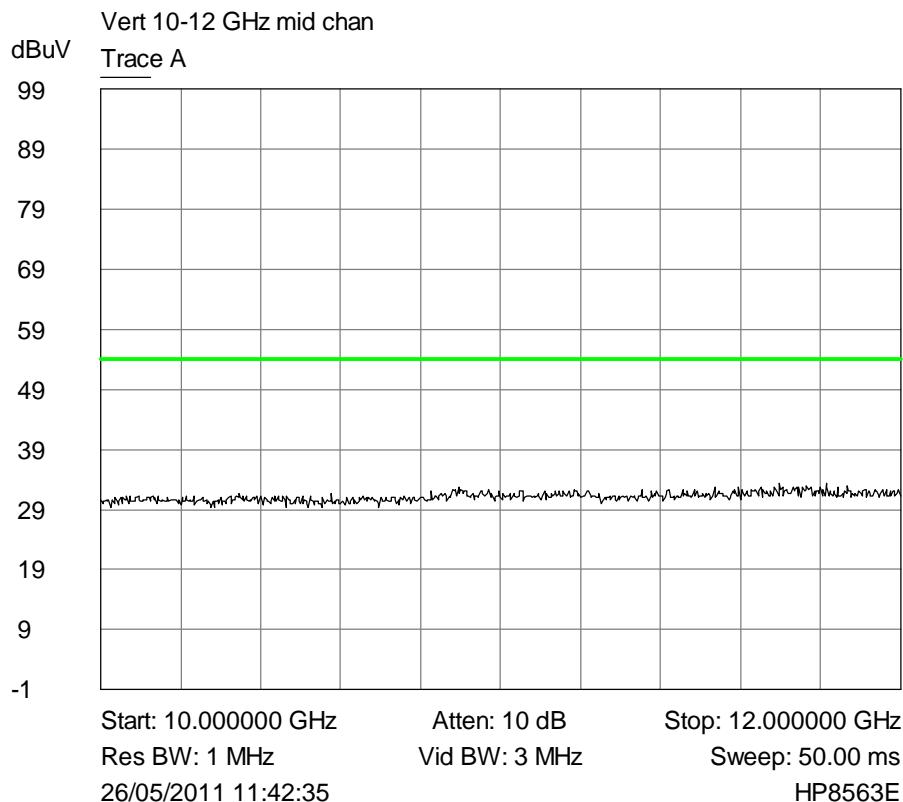

Vert 13-14 GHz mid chan

dBuV Trace A

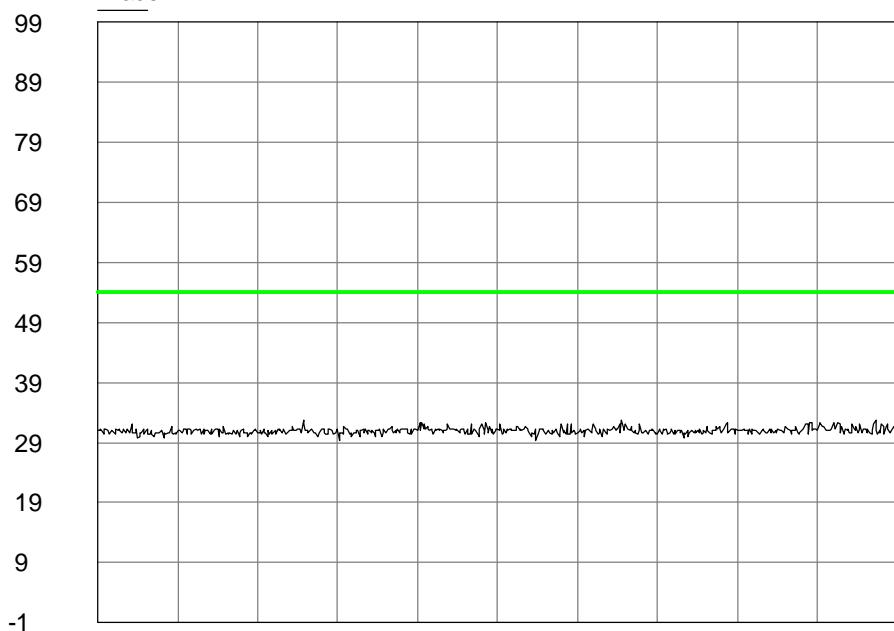

Start: 13.000000 GHz

Res BW: 1 MHz

26/05/2011 09:22:55

Atten: 10 dB

Vid BW: 3 MHz


Stop: 14.000000 GHz

Sweep: 50.00 ms

HP8563E

Vert 14-15 GHz mid chan

dBuV Trace A

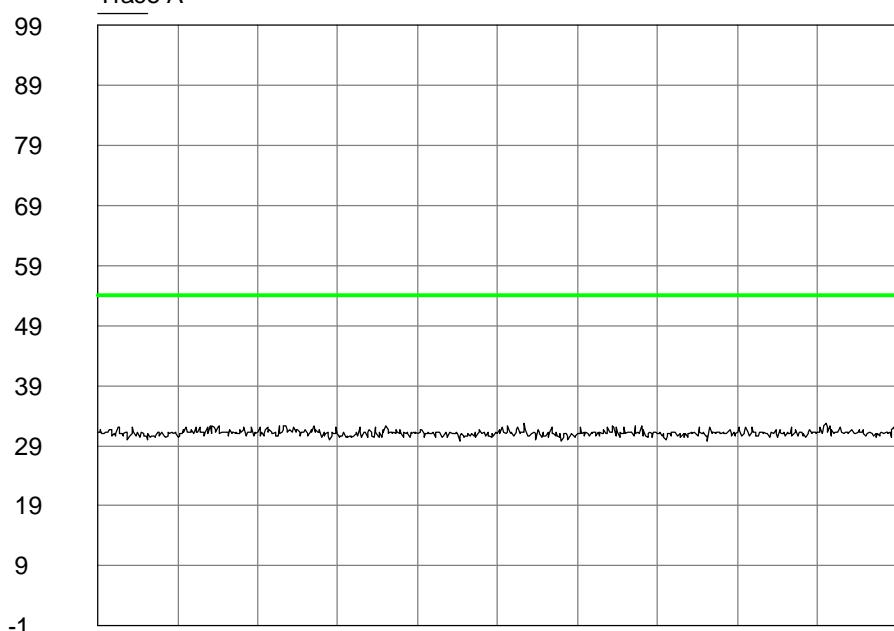

Start: 14.000000 GHz

Res BW: 1 MHz

26/05/2011 09:23:28

Atten: 10 dB

Vid BW: 3 MHz


Stop: 15.000000 GHz

Sweep: 50.00 ms

HP8563E

Vert 15-16 GHz mid chan

dBuV Trace A

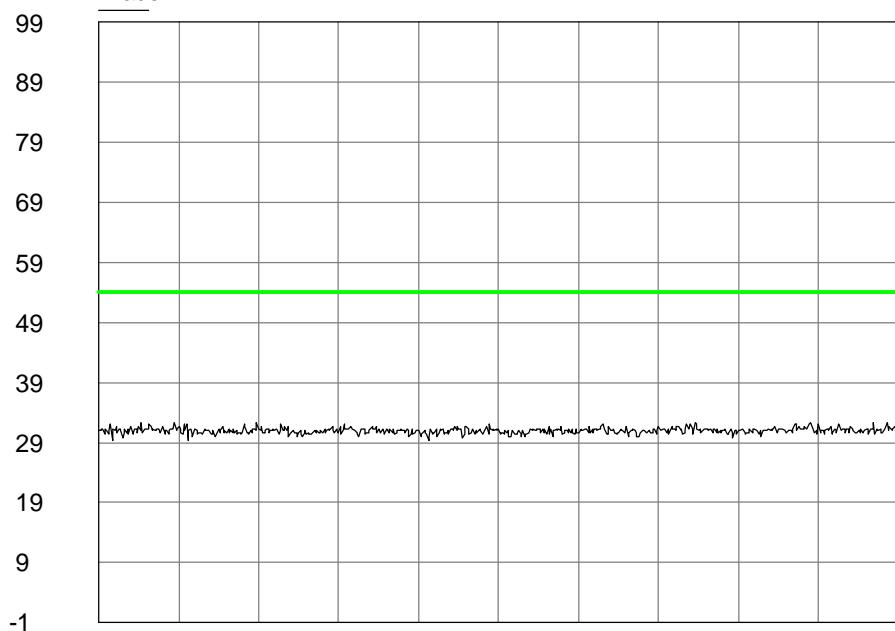

Start: 15.000000 GHz

Res BW: 1 MHz

26/05/2011 09:24:08

Atten: 10 dB

Vid BW: 3 MHz


Stop: 16.000000 GHz

Sweep: 50.00 ms

HP8563E

Vert 16-17 GHz mid chan

dBuV Trace A

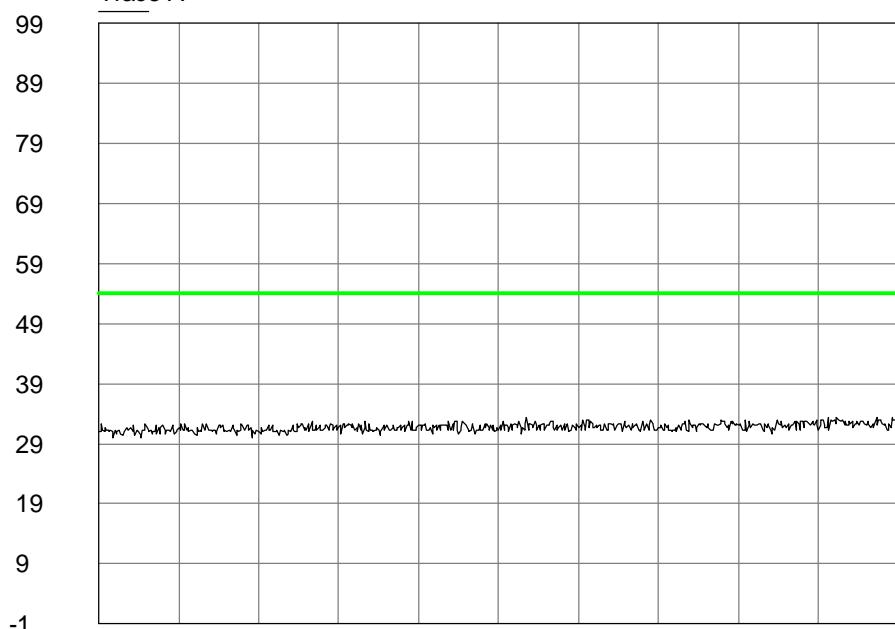

Start: 16.000000 GHz

Res BW: 1 MHz

26/05/2011 09:28:59

Atten: 10 dB

Vid BW: 3 MHz


Stop: 17.000000 GHz

Sweep: 50.00 ms

HP8563E


Vert 17-18 GHz mid chan



dBuV Trace A

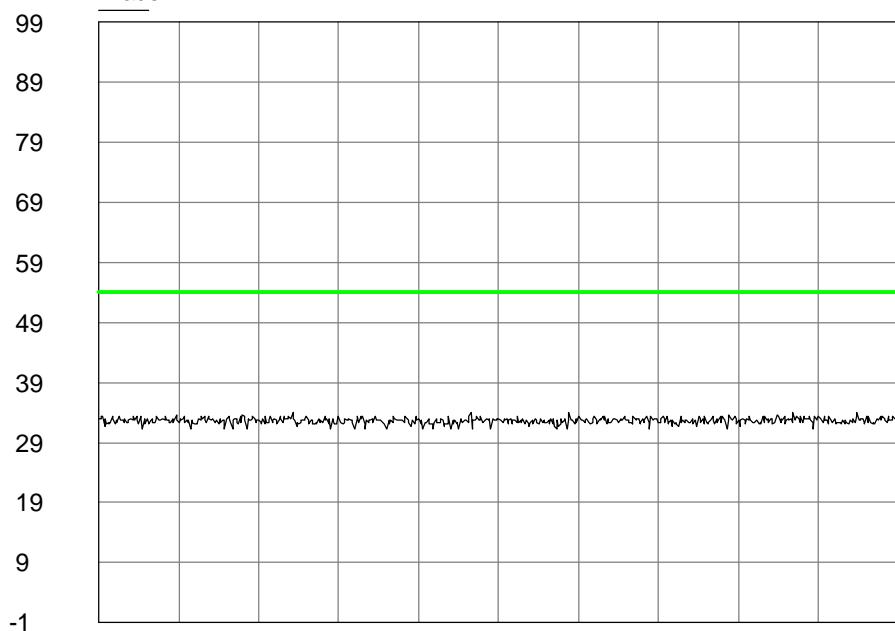

Horiz & Vert 18-20 GHz mid chan

dBuV Trace A

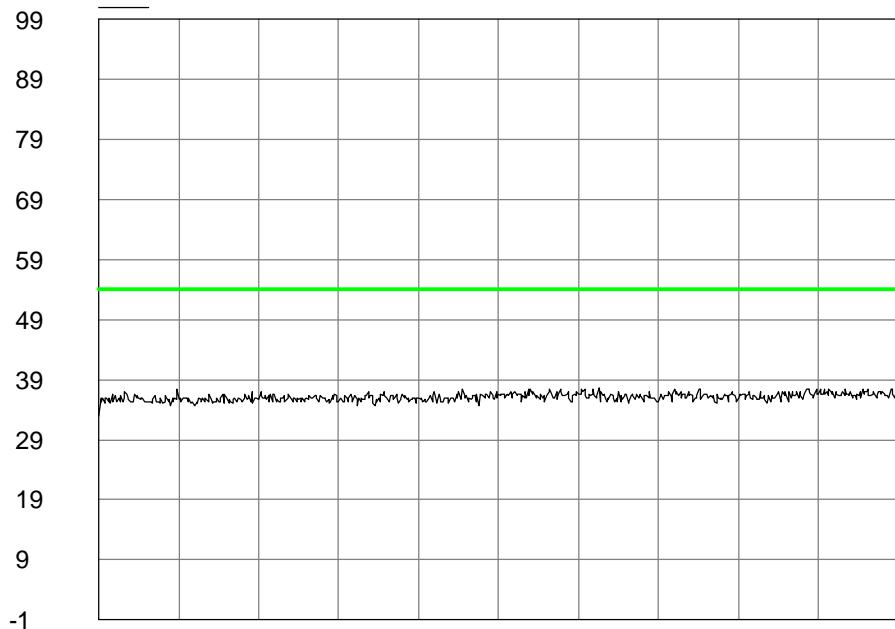

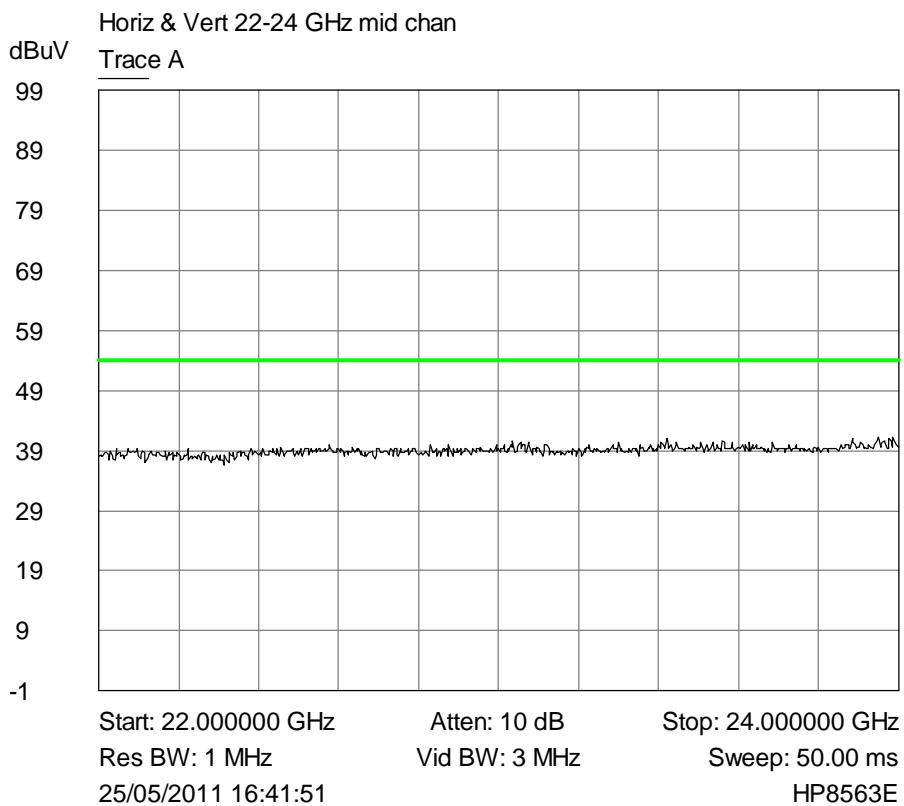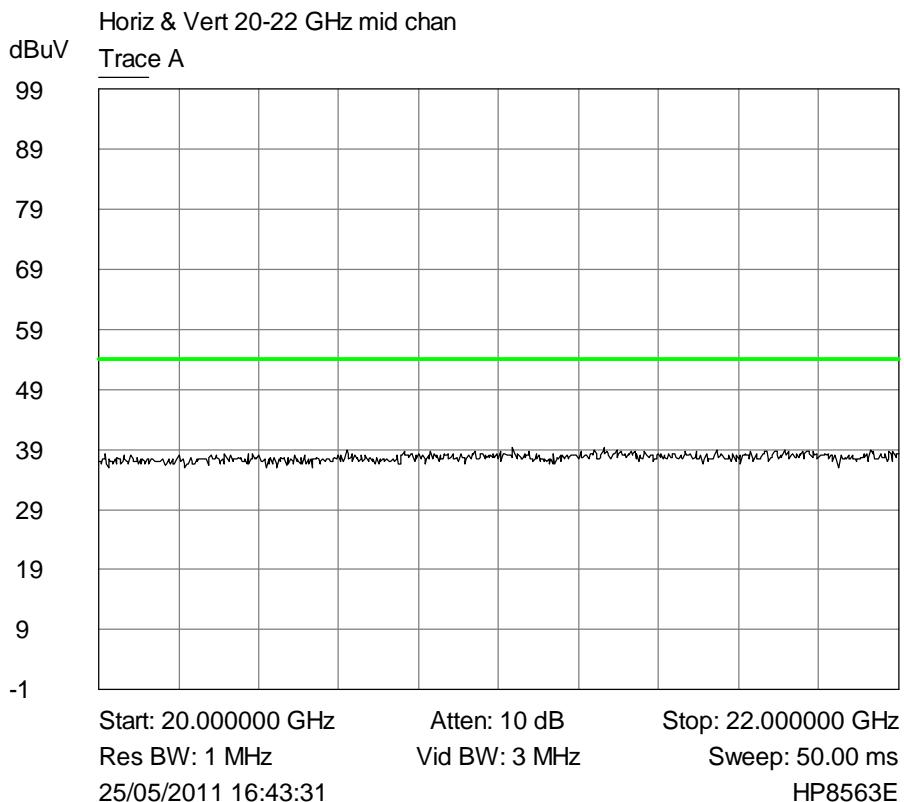

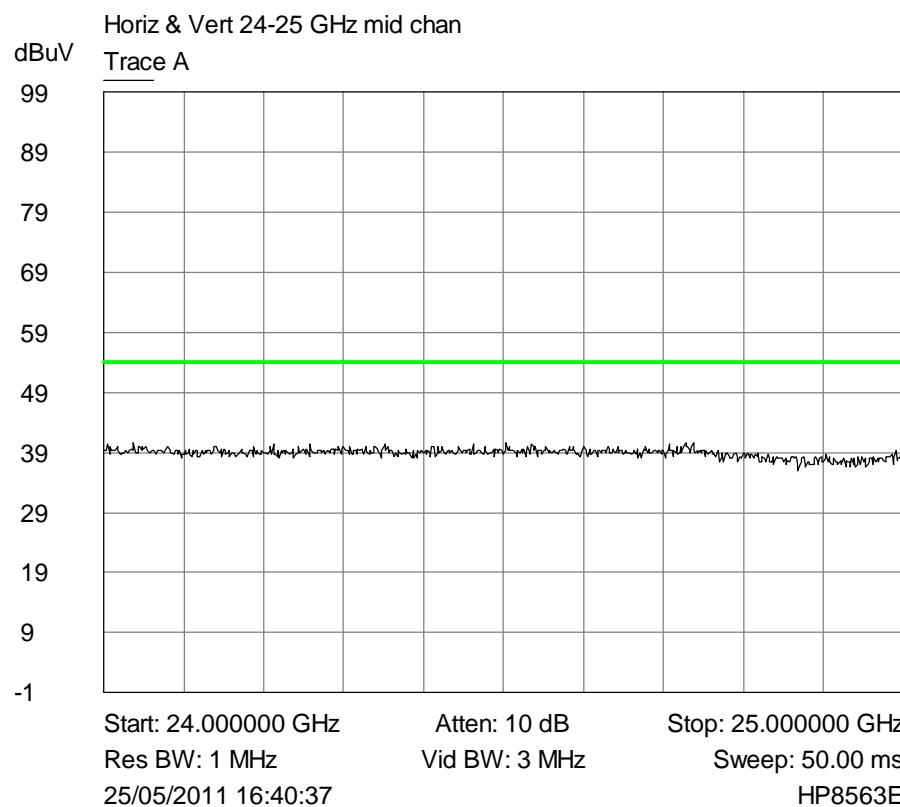


Table of signals measured above 1GHz.

Note: The values measured and tabulated below are with the EUT operating in continuous transmit and are directly a result of the modulated signal (harmonics). According to 15.35(c) the duty cycle should be taken into consideration when calculating the average value of the emission. Therefore these values will actually be reduced in practice. Refer to the manufacturer's statement regarding actual duty cycle.

Horizontal

Bottom Channel

Signal No.	Freq (MHz)	Peak Amp (dBuV)	AV Amp (dBuV)	AV - Lim1 (dB)
1	4810	63.3	56.0	+2.0
2	7216	62.3	55.0	+1.0
3	9620	57.0	49.0	-5.0
4	12025	59.0	49.5	-4.5

Middle Channel

Signal No.	Freq (MHz)	Peak Amp (dBuV)	AV Amp (dBuV)	AV - Lim1 (dB)
1	4880	57.0	50.0	-4.0
2	7320	64.8	56.3	+2.3
3	9760	60.0	52.0	-2.0
4	12200	56.3	47.2	-6.8

Top Channel

Signal No.	Freq (MHz)	Peak Amp (dBuV)	AV Amp (dBuV)	AV - Lim1 (dB)
1	4960	60.0	52.0	-2.0
2	7438	58.5	49.0	-5.0
3	9920	53.8	44.0	-10.0
4	12400	53.5	43.5	-10.5

Vertical

Bottom Channel

Signal No.	Freq (MHz)	Peak Amp (dBuV)	AV Amp (dBuV)	AV - Lim1 (dB)
1	2372	50.5	46.0	-8.0
2	2436	48.5	43.0	-11.0
3	4810	61.0	53.0	-1.0
4	7216	60.5	51.5	-2.5
5	9620	58.5	50.0	-4.0
6	12025	57.7	49.3	-4.7

Middle Channel



Signal No.	Freq (MHz)	Peak Amp (dBuV)	AV Amp (dBuV)	AV - Lim1 (dB)
1	2407	50.3	46.5	-7.5
2	2473	49.5	43.1	-10.9
3	4880	59.1	51.0	-3.0
4	7320	61.0	54.0	0.0



5	9760	60.7	52.5	-1.5
6	12200	54.5	44.8	-9.2



Top Channel

Signal No.	Freq (MHz)	Peak Amp (dBuV)	AV Amp (dBuV)	AV - Lim1 (dB)
1	2448	52.0	48.1	-5.9
2	2512	47.5	41.5	-12.5
3	4960	62.5	55.2	+1.2
4	7438	59.3	50.0	-4.0
5	9920	55.7	46.0	-8.0
6	12400	52.2	44.0	-10.0

6.3 Fundamental Emissions

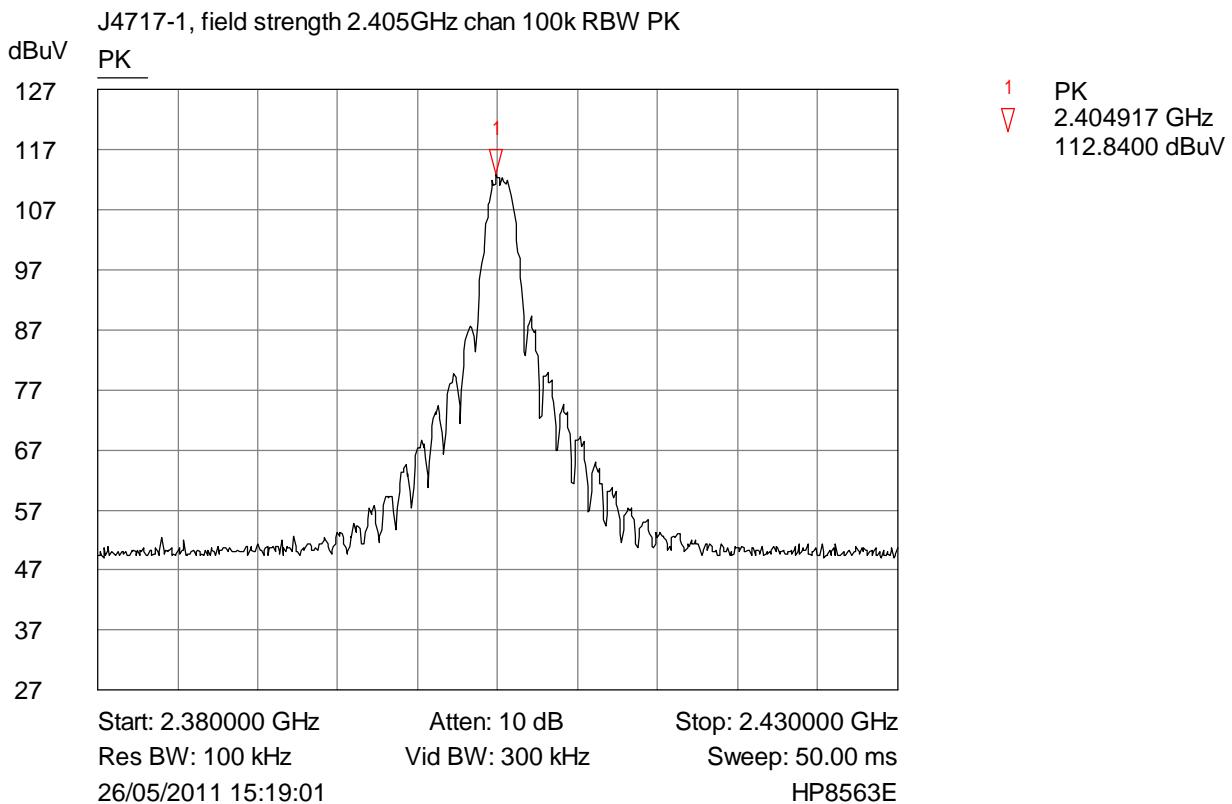
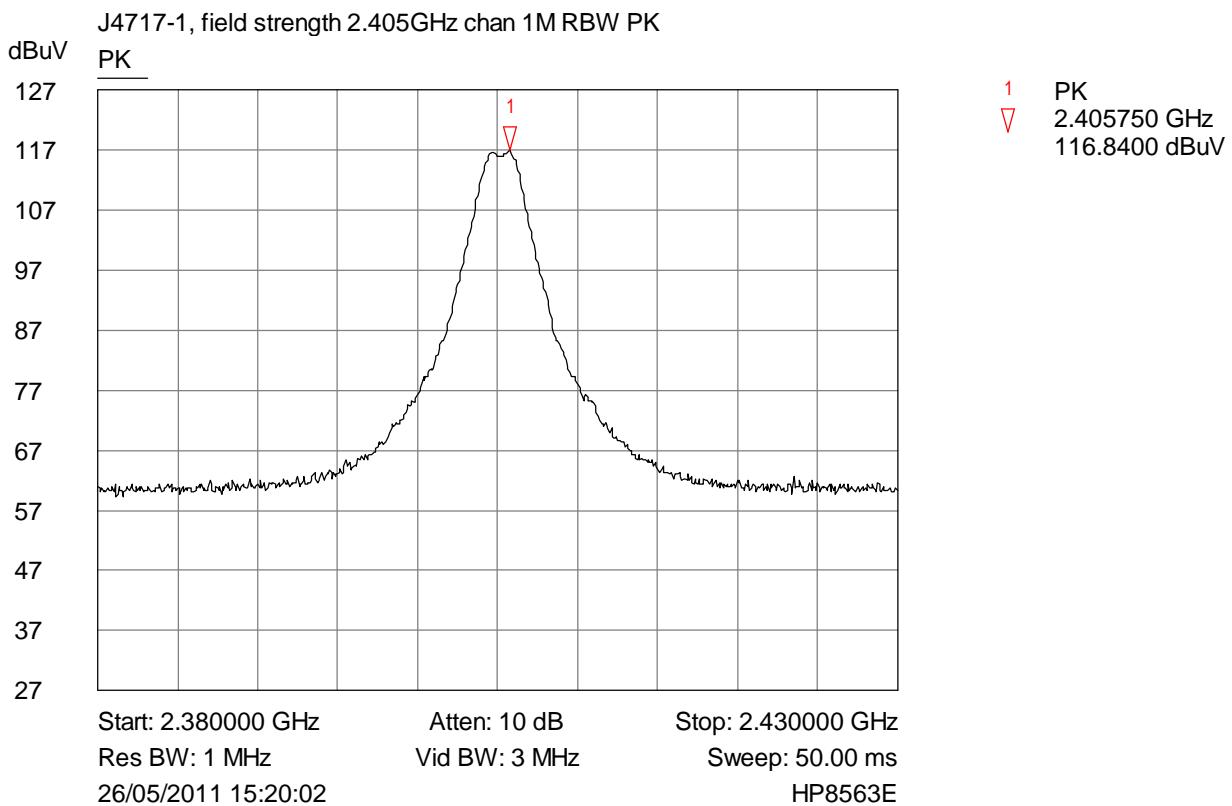


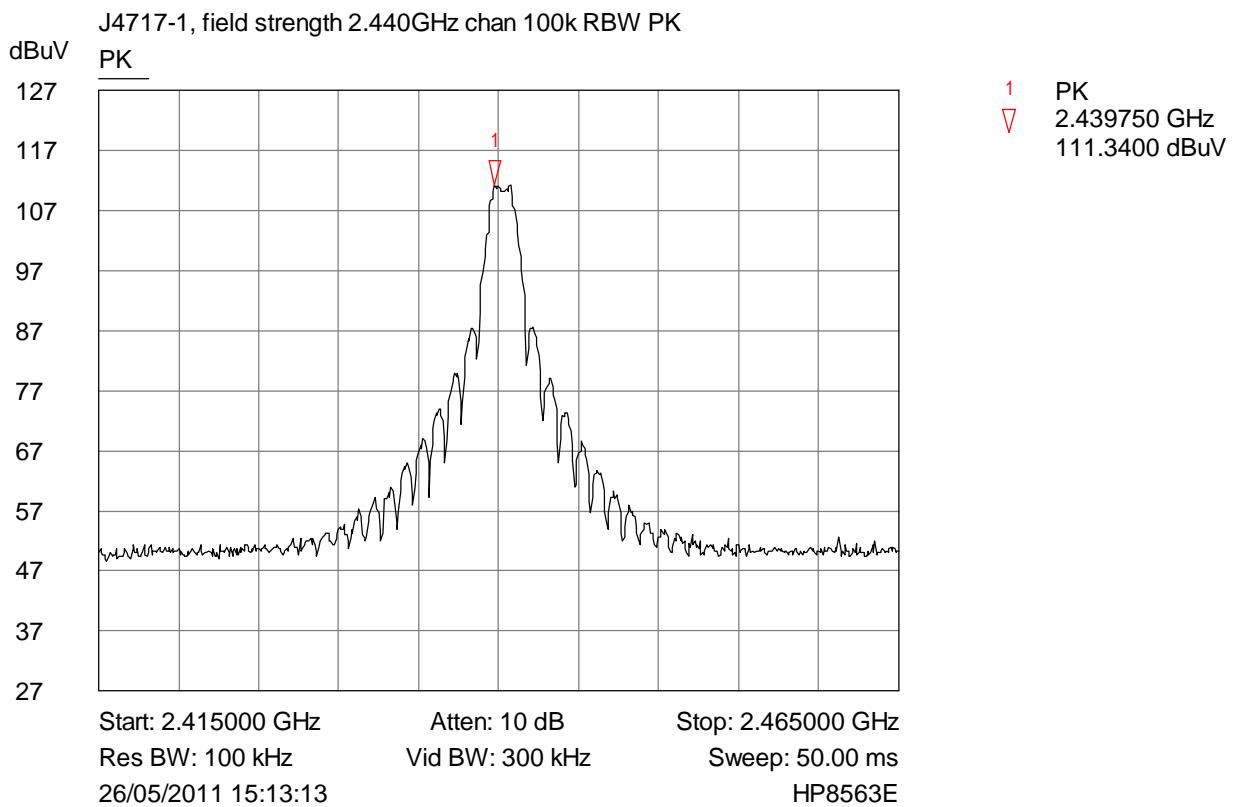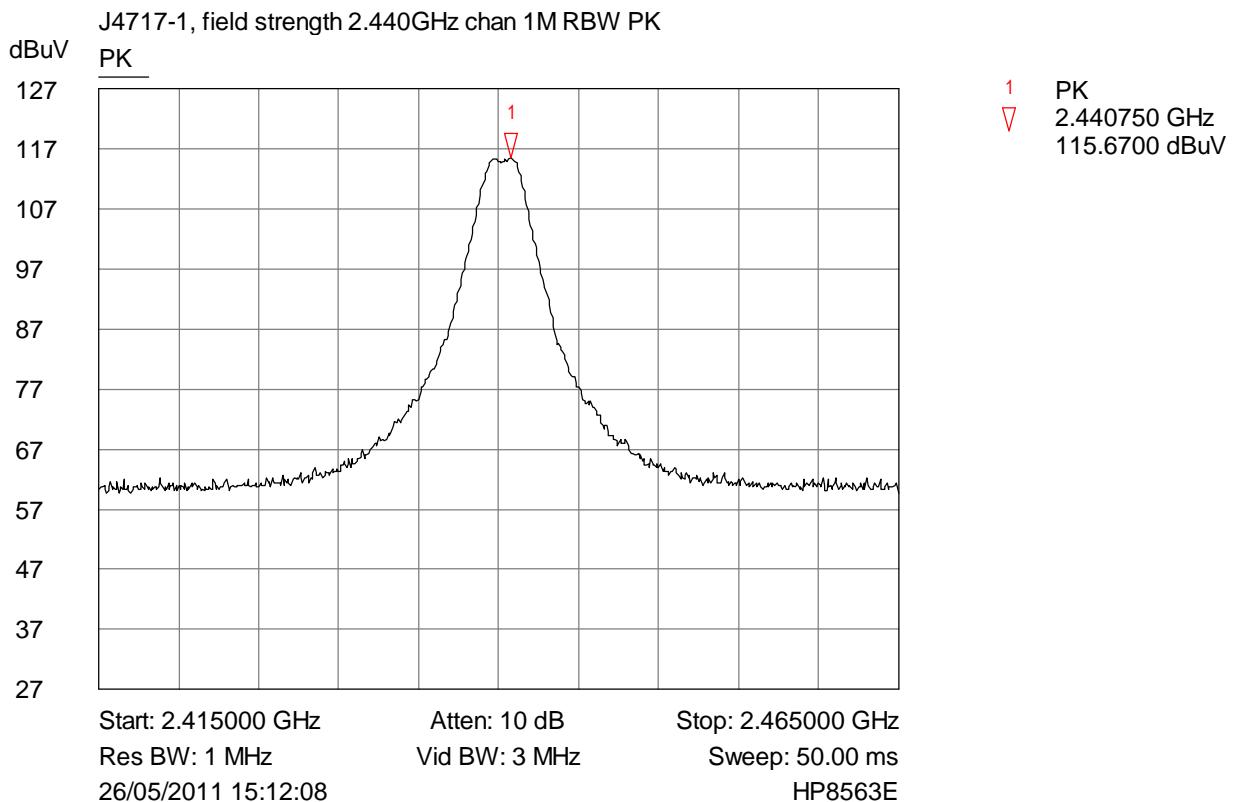

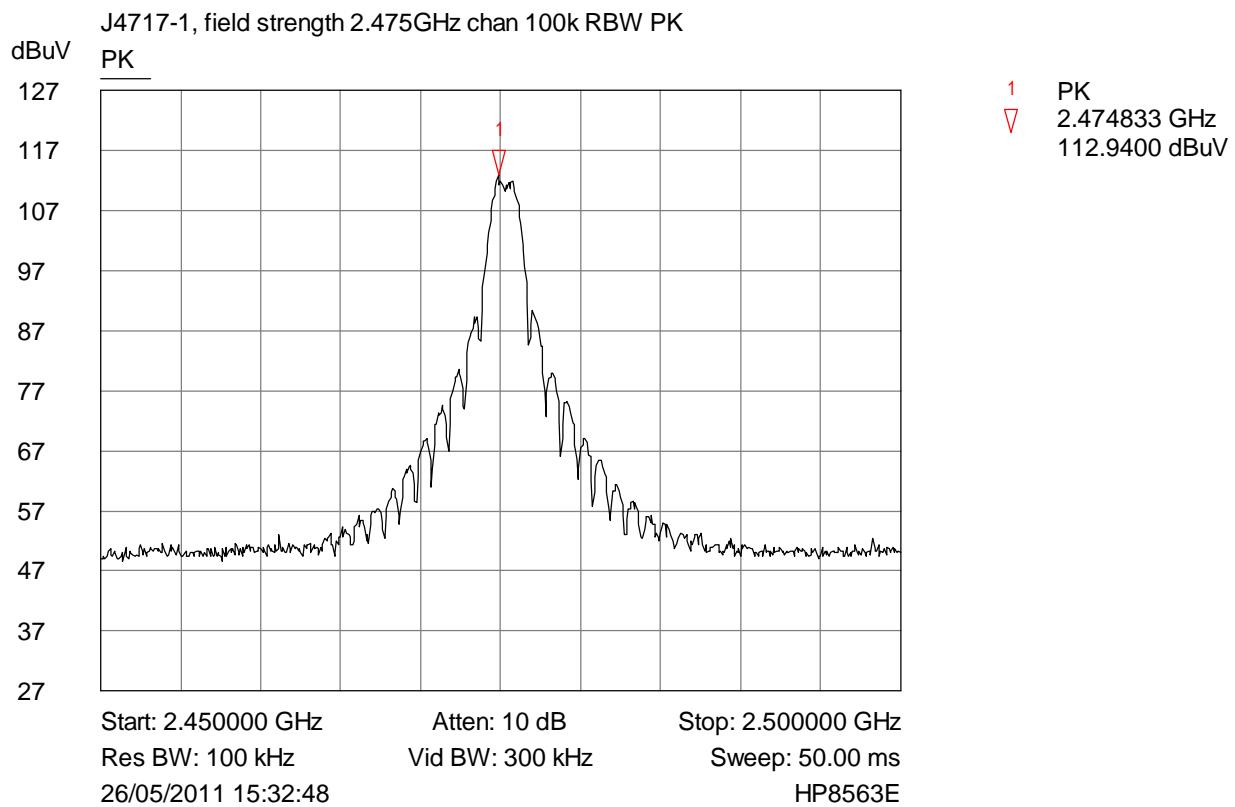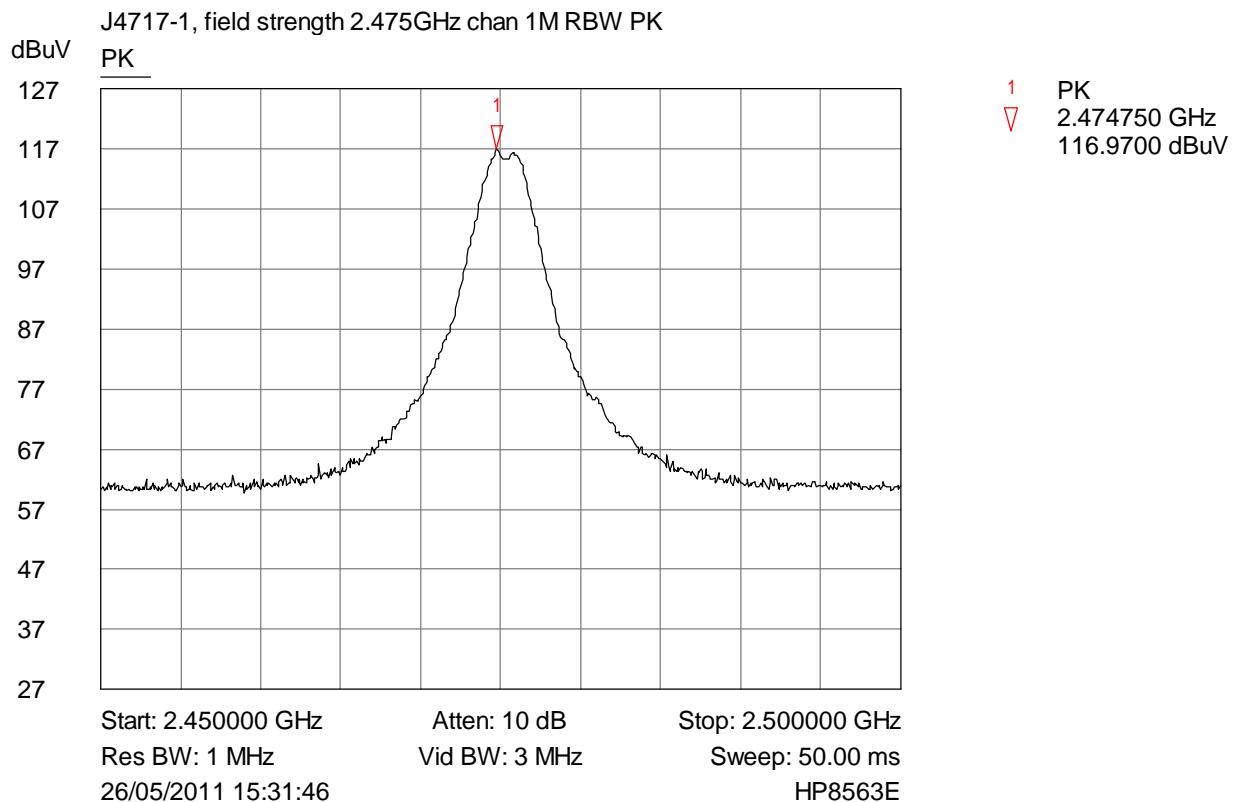



6.4 Duty Cycle

Plots of duty cycle period and pulse width (nominally 1%):

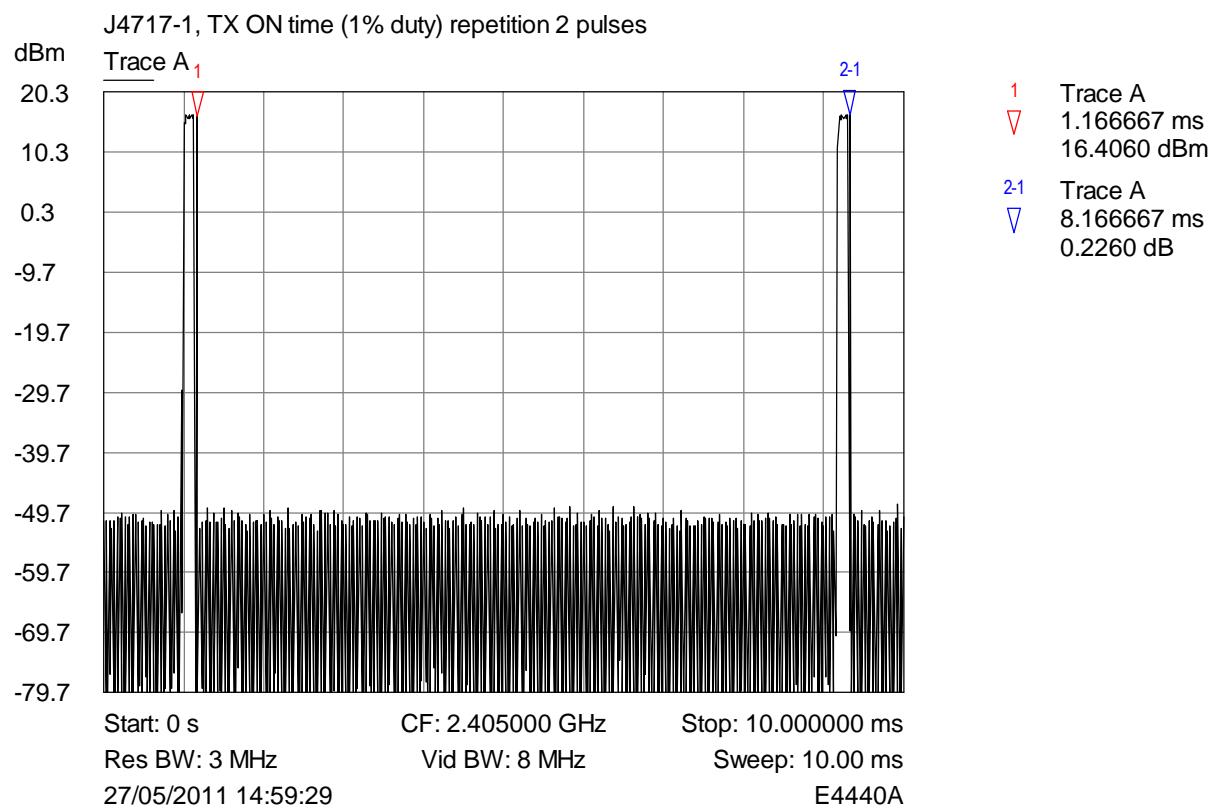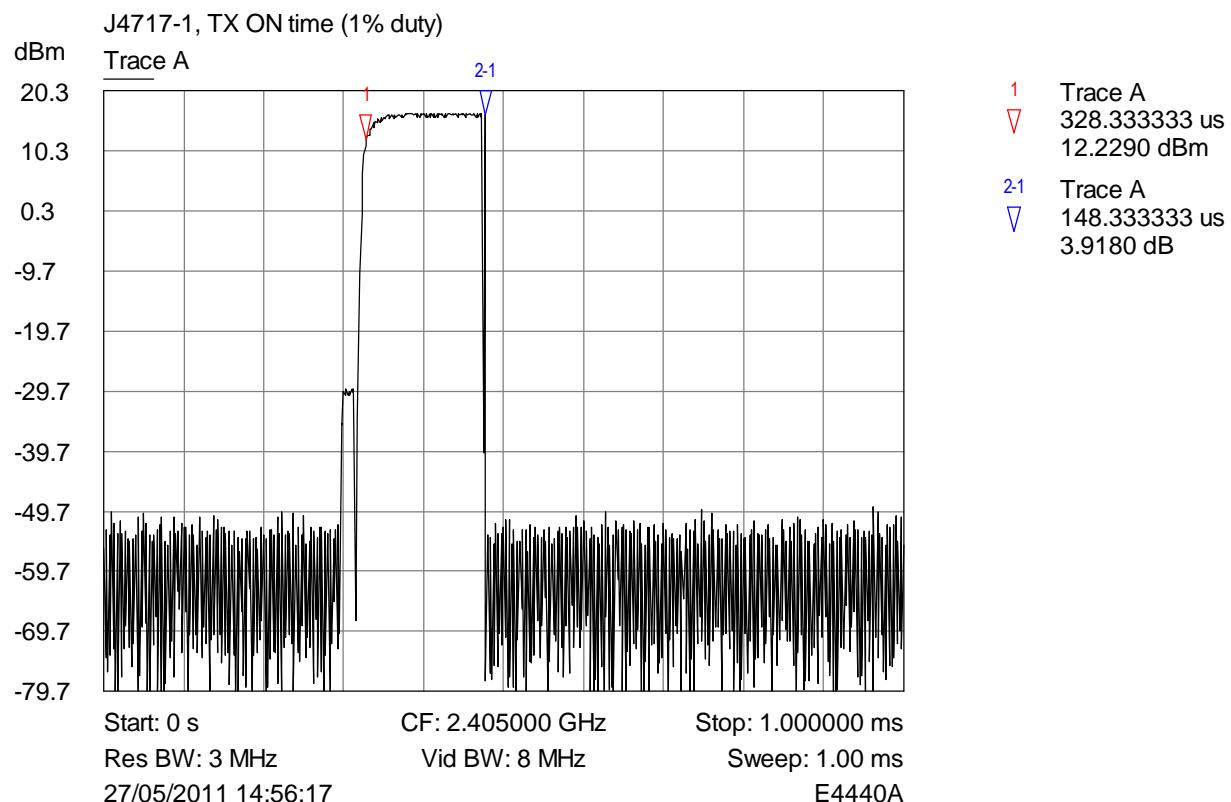



6.5 6dB Bandwidth

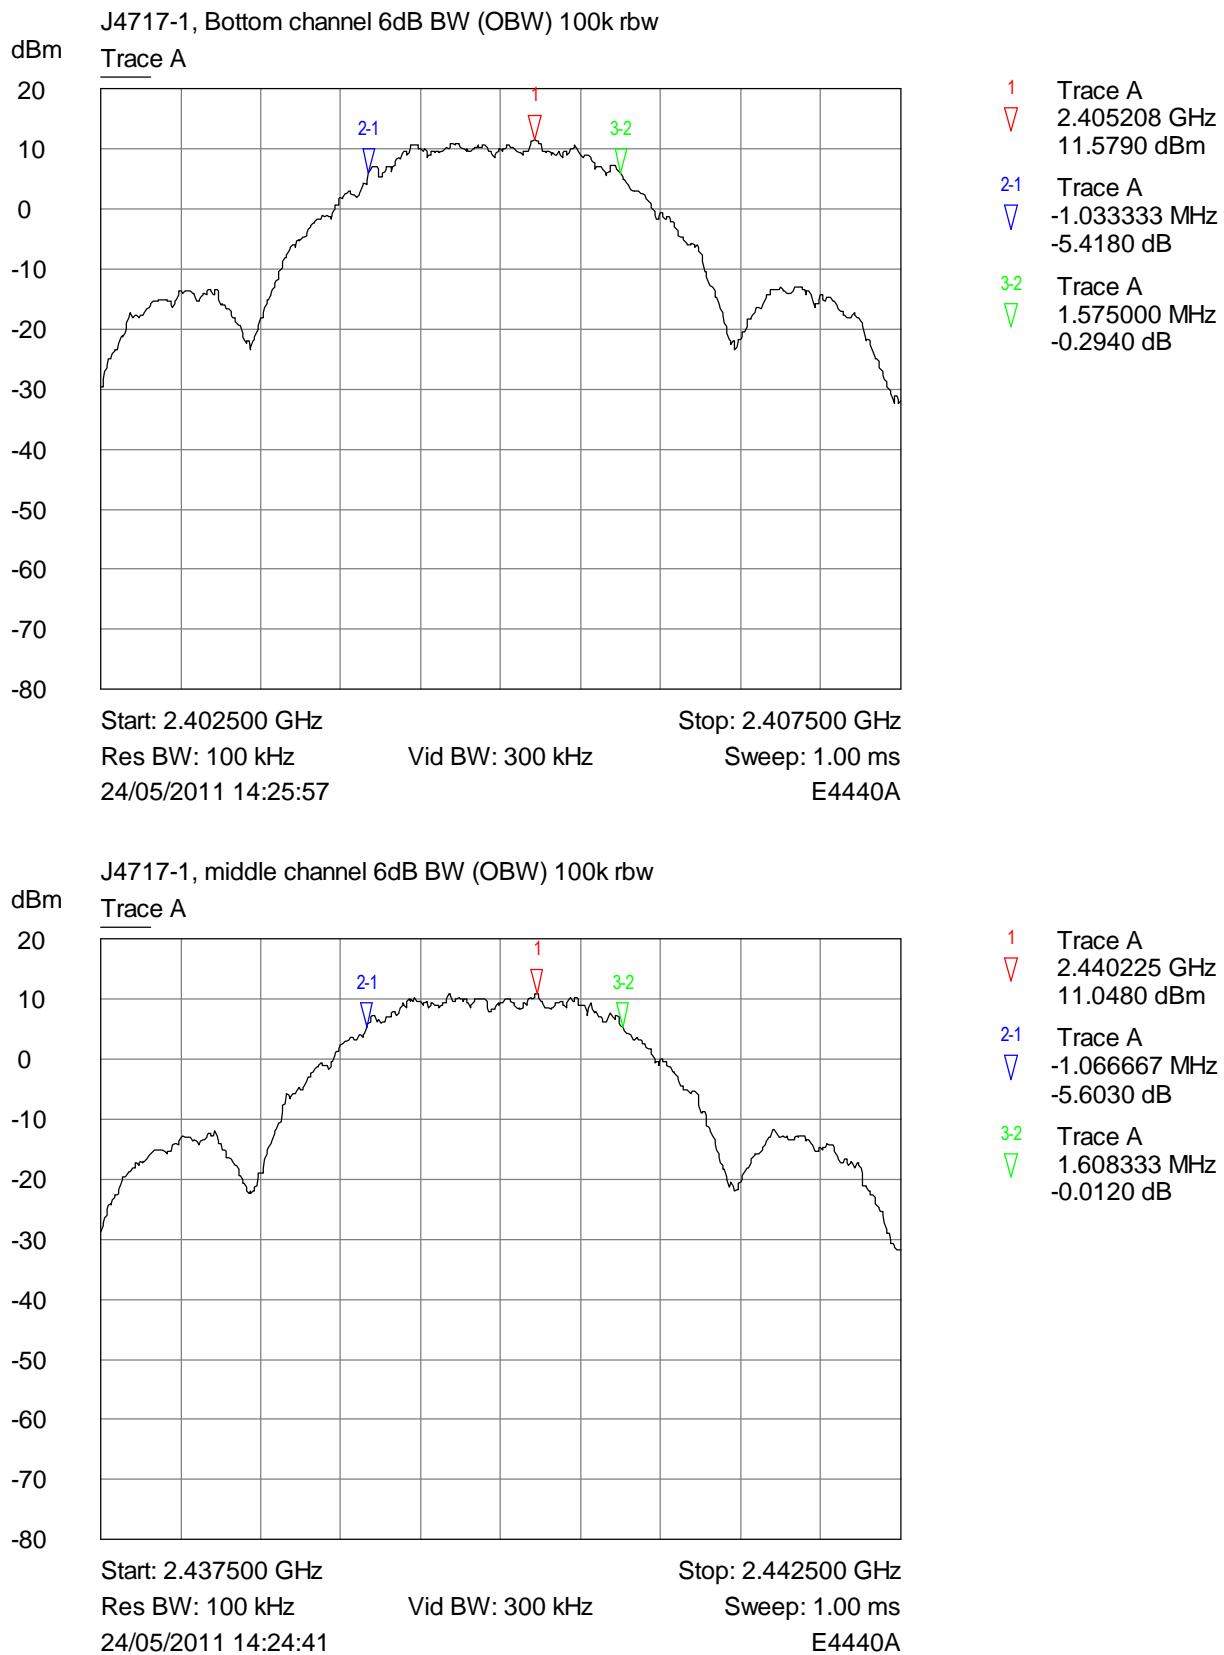


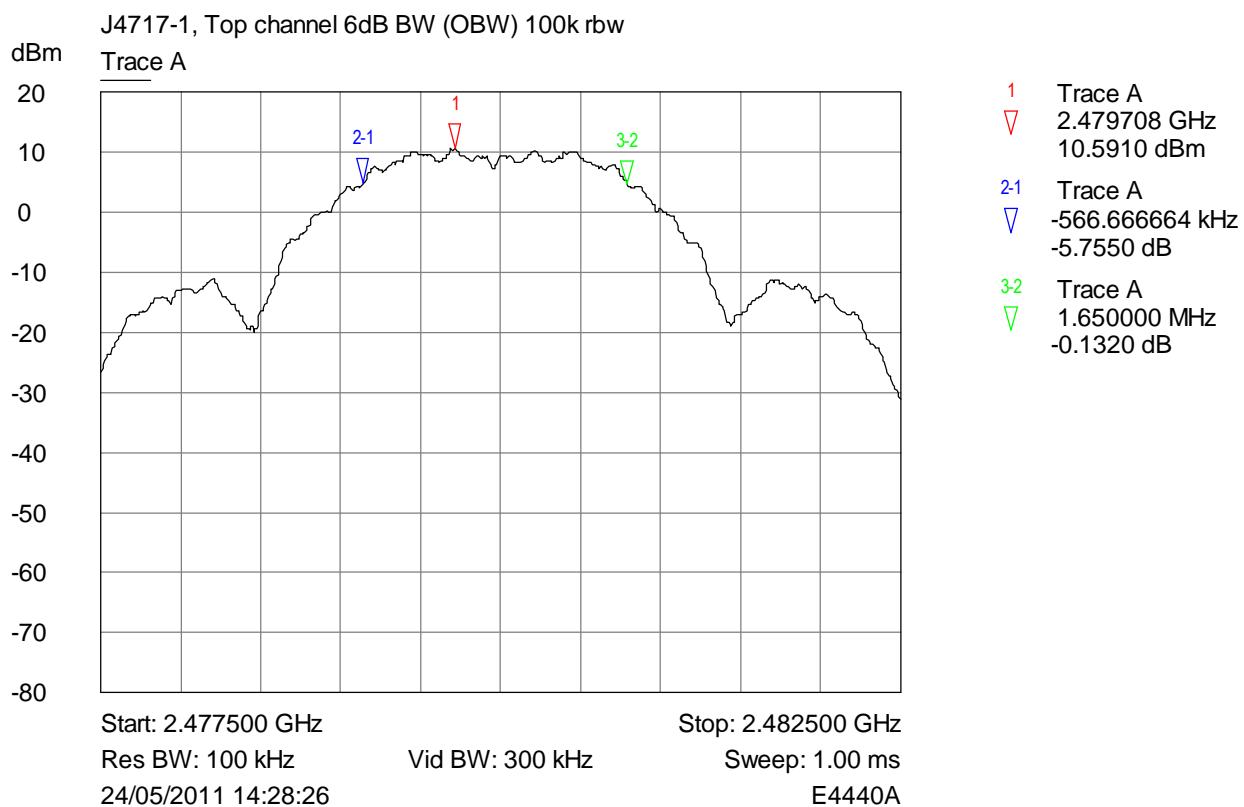


6.6 Band Edge Compliance

Band Edge.

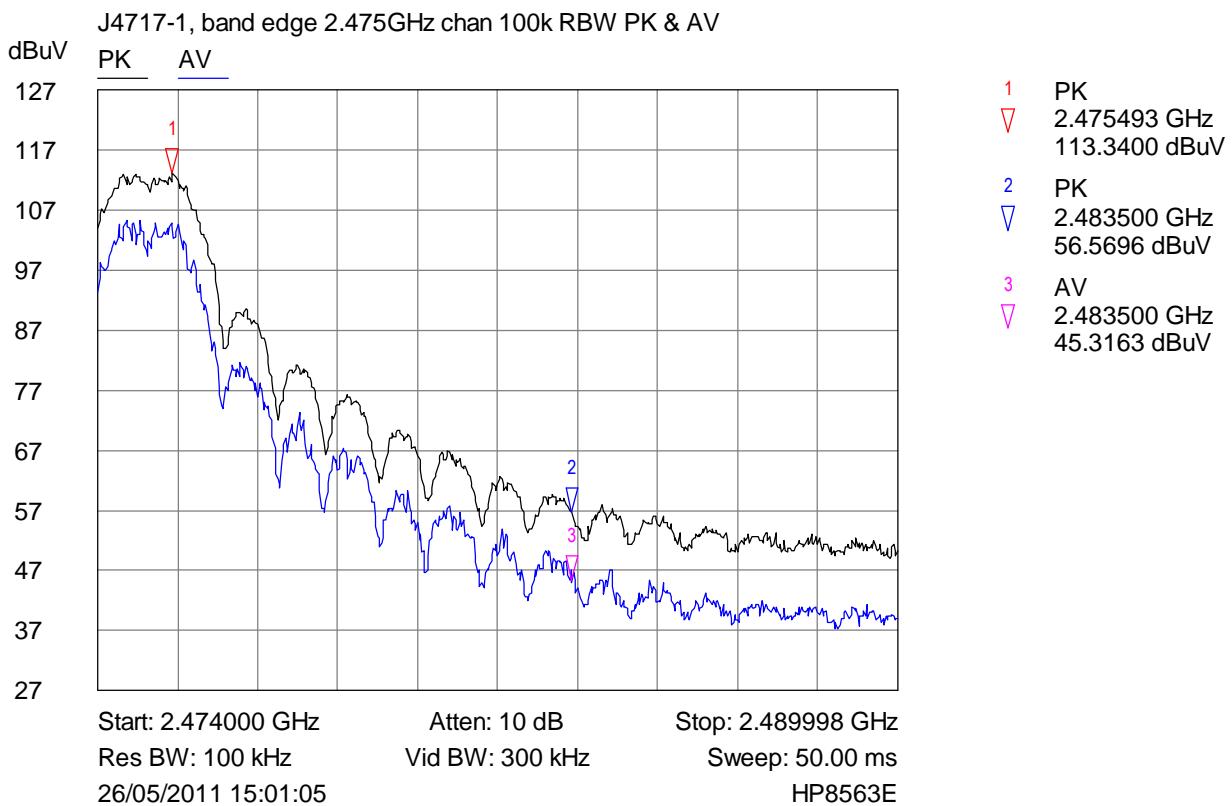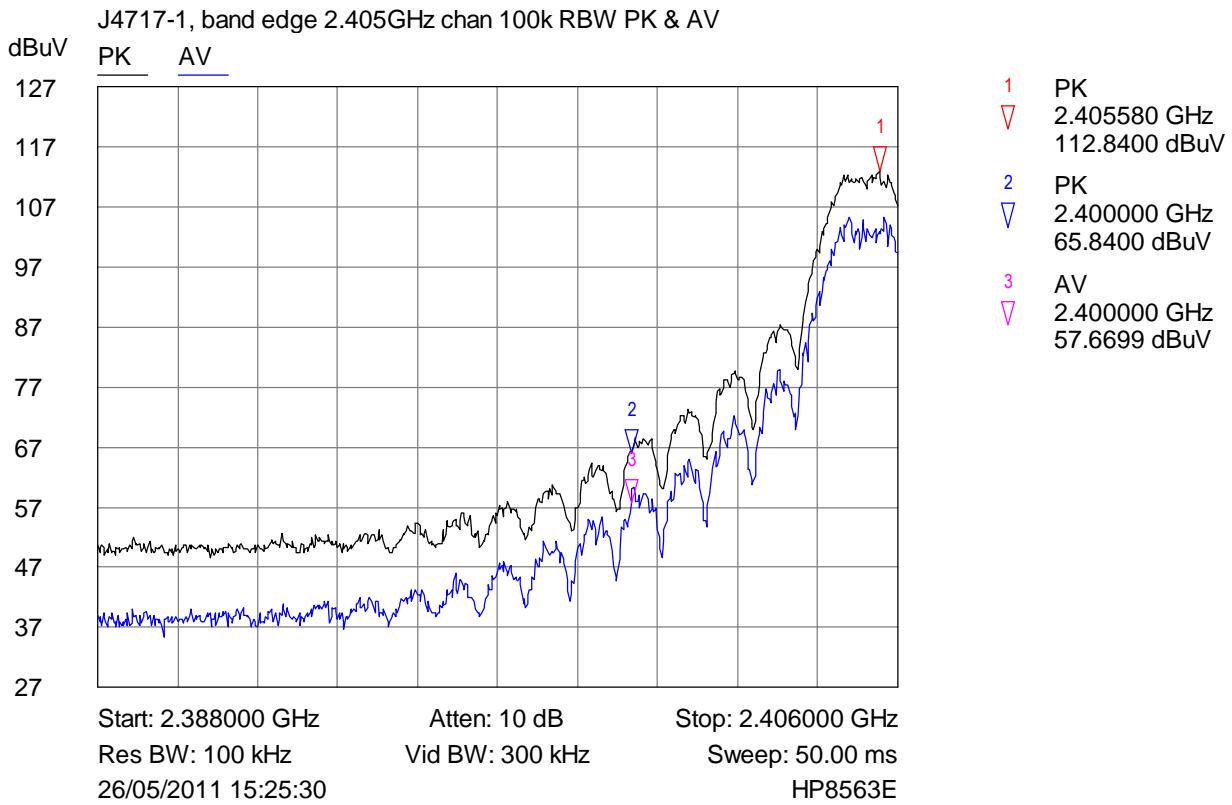

Restricted band edge.

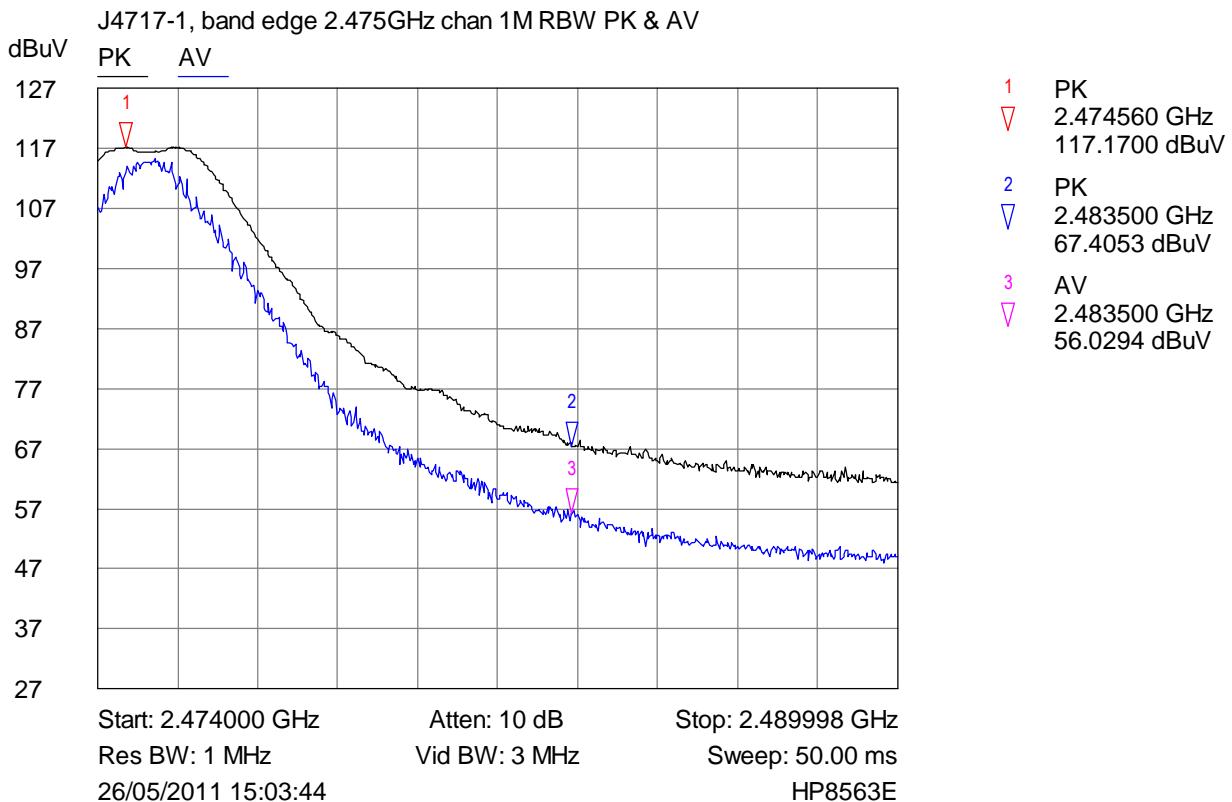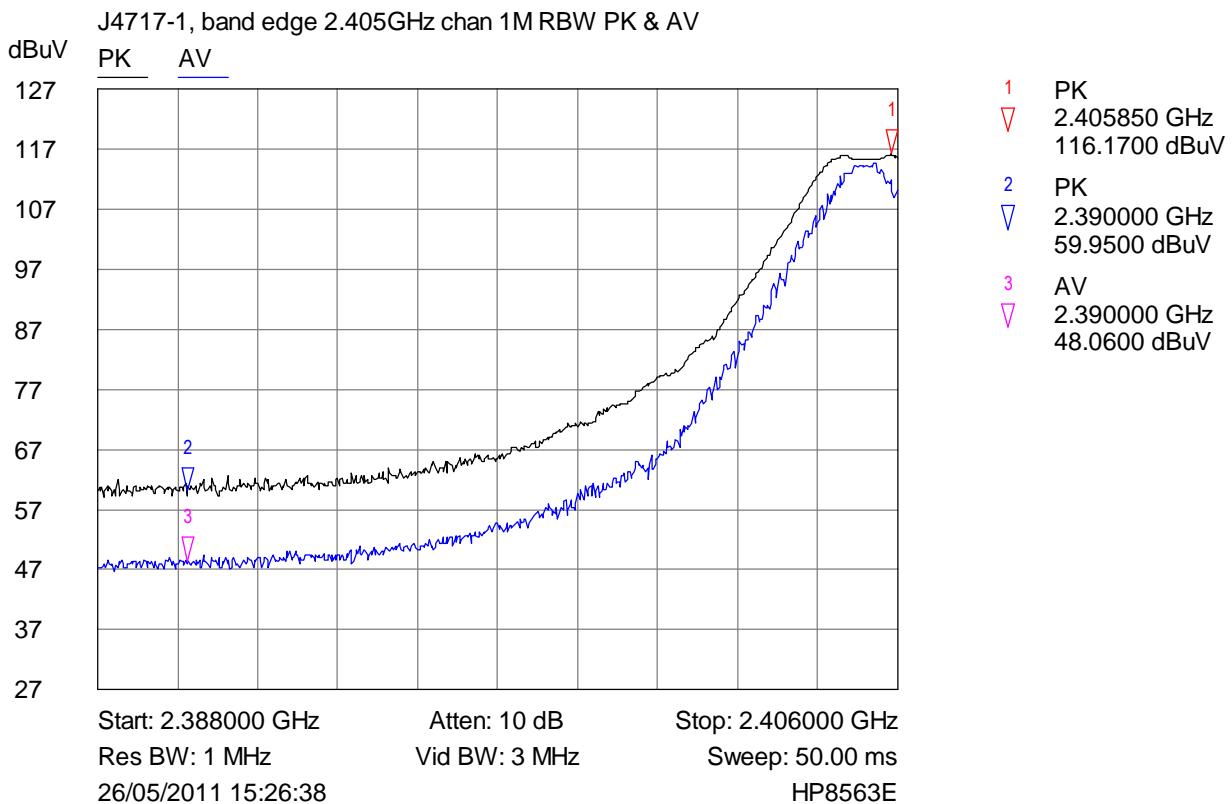

7 Explanatory Notes

7.1 Explanation of FAIL LIMIT 1 Statement

The **FAIL MARGIN 1** statement(s) may appear on the graphical plots when the receiver used to measure your equipment detects a signal that exceeds the dashed line. This does not mean that the **EUT** has failed the test, only that the 10 dB calculation margin set, has been exceeded on a peak measurement.

Following the indication that the margin has been exceeded, measurements are made at the frequency (ies) of the peaks. These peaks have been calculated to either Quasi Peak or Average Peak dependant on the test. A table of results has been printed on the reverse of the page. This table looks similar to the one illustrated below: -

Signal Number	Frequency (MHz)	Peak (dB μ V)	PK Delta L 1 (dB)	Avg (dB μ V)	Av Delta L 1 (dB)
1	12345.0000	12.9	-2.5	10.2	-5.2

The First column, labelled Signal Number, is a number that the receiver has given to each signal, which has been calculated.

Column Two, labelled Frequency (MHz), is the frequency of the signal received.

Column Three, labelled Peak (dB μ V), (can also be labelled, in the case of Quasi Peak, Peak dB μ V/m) is the Level that was received at peak amount in dB above 1 μ V.

Column Four, labelled PK Delta L1 (dB), is the same level as Column three but is given in a level relative to the limit line required.

Column Five, labelled AVG (dB μ V), (can also be labelled, in the case of Quasi Peak, QP dB μ V/m) when undertaking a Quasi peak test, This is the Average or Quasi peak calculation results given in dB μ V or dB μ V/m above 1 μ V.



Column Six, labelled AV Delta L 1 (dB), (can also be labelled, in the case of Quasi Peak, QP Delta L 1 (dB)) is the Average or Quasi Peak calculation relevant to the limit line. The results entered in this column indicate the signal level relative to the compliance limit required. Negative numbers indicate that the product is compliant.

7.2 Explanation of limit line calculations for radiated measurements

The limits given in the test standard are normally expressed as absolute values (e.g. in μ V/m at a specified distance), whereas the measured values are expressed as peak, quasi peak or average values in dB μ V/m referenced to the measuring instrument inputs. RN Electronics calibrate the test set-up to account for any path losses, antenna gains, etc. so that the value read at the receiver relates directly to the absolute value required, except that it is expressed in dB relative to one microVolt and may need to take account of any alternative measuring distance used. Examples:

- (a) limit of 500 μ V/m equates to $20 \log (500) = 54$ dB μ V/m.
- (b) limit of 300 μ V/m at 10m equates to $20 \log (300 \cdot 10/3) = 60$ dB μ V/m at 3m
- (c) limit of 30 μ V/m at 30m, but below 30MHz, equates to $20 \log (30) + 40 \log (30/3) = 69.5$ dB μ V/m at 3m, as extrapolation factor below 30MHz is 40 dB/decade per 15.31(f)(2)

8. Photographs

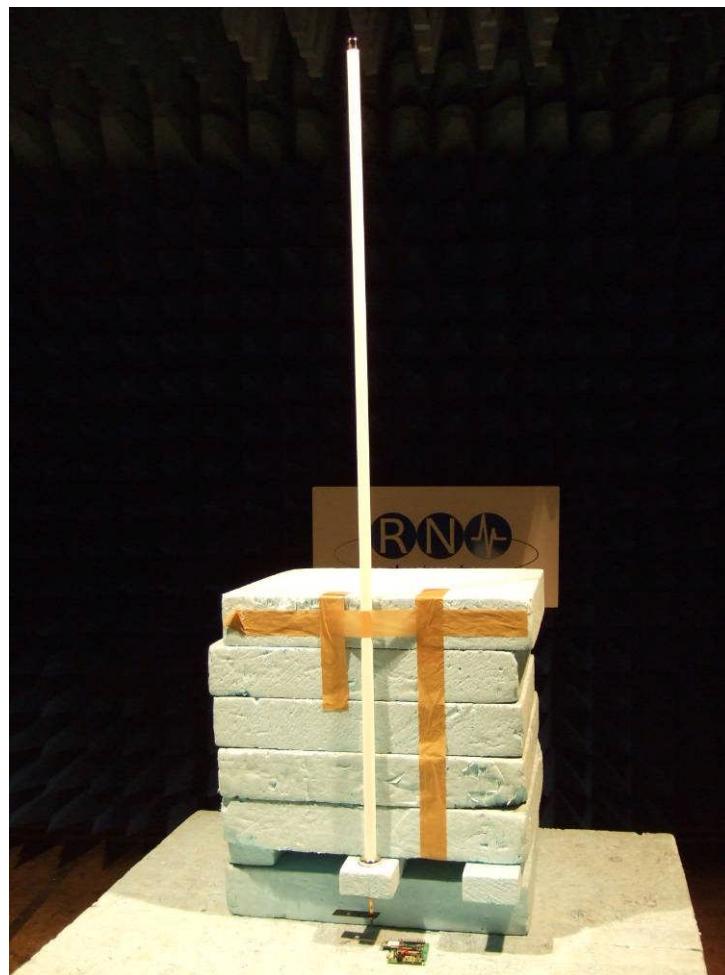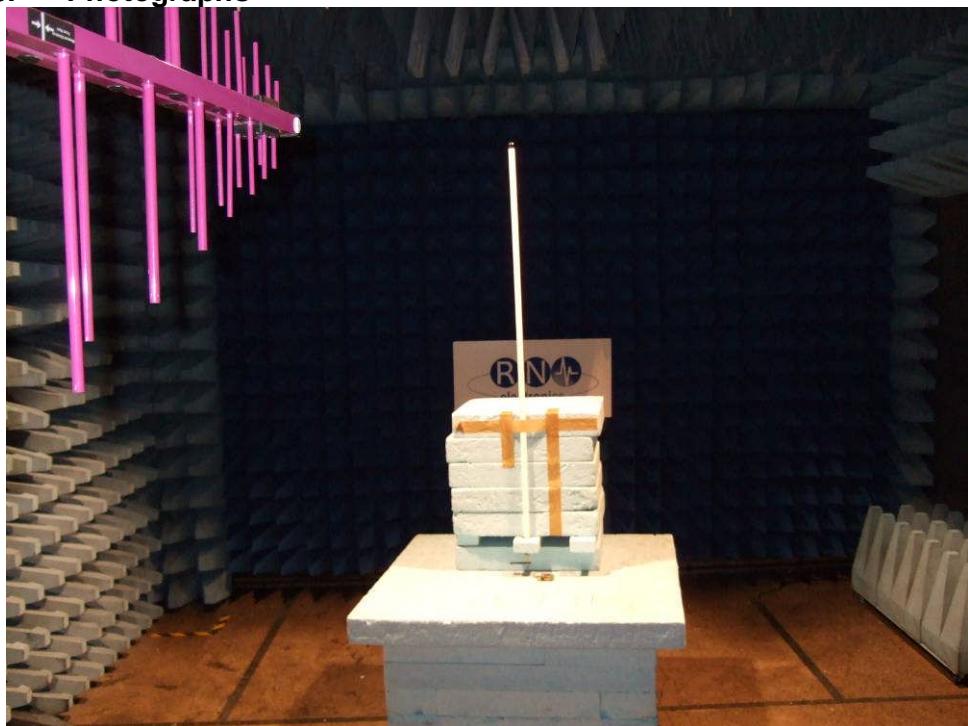

**Photographs of the EUT as viewed from in front
of the antenna, site M.**

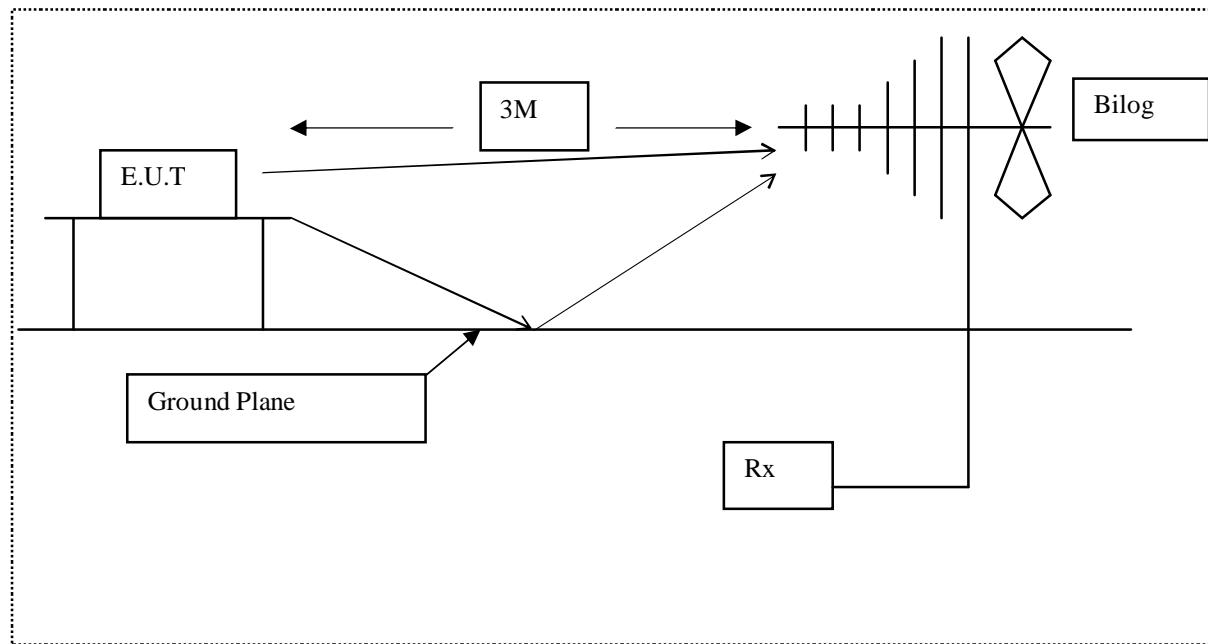


Diagram of the radiated emissions test setup.

Photograph of the EUT as viewed from screened room (conducted emissions)

Test not applicable.

The digital device tested is intended to be powered from 3V DC supply (battery) and intended for modular approval. Any third party device it is incorporated into with a connection to the AC power line will require demonstration of compliance with the limits. Refer to §15.207(c) "Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to AC power lines"

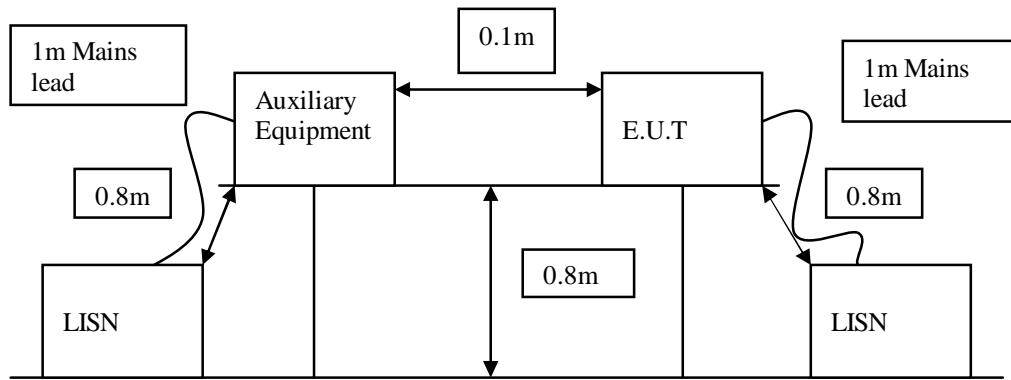


Diagram of the conducted emissions test setup.

Identifying Photograph of the EUT



9. Signal Leads

Port Name	Cable Type
RF Port	Coaxial

10. Test Equipment Calibration list

The following table lists the test equipment used, last calibration date and calibration interval. All test equipment used has been maintained within the calibration requirements of **R.N. Electronics Ltd.** test facility quality system. Calibration intervals are regularly reviewed dependent on equipment manufacturer's recommendations and actual usage of the equipment.

RNNo	Model	Description	Manufacturer	Date Calibrated	Period
E268	BHA 9118	1-18 GHz Horn Antenna	Schaffner	02-Mar-09	60
E313	777C	30dB Attenuator	Narda	30-Jun-10	12
E342	8563E	Spectrum Analyser 26.5 GHz	HP	29-Mar-11	24
E410	N5181A	3 GHz MXG Signal Generator	Agilent Technologies	06-Oct-10	12
E411	N9039A	9 kHz - 1 GHz RF Filter Section	Agilent Technologies	05-Oct-10	12
E412	E4440A	3 Hz - 26.5 GHz PSA	Agilent Technologies	05-Oct-10	12
E429	-	5 Switch Filter Box 0.91 GHz - 16.3 GHz	RN Electronics	N/A	N/A
E434	G3RUH	10 MHz GPS Oscillator	James Miller	N/A	N/A
TMS78	460420	Std Gain Horn Antenna 12.4-18 GHz	ETS Systems	03-Nov-10	24
TMS79	460451	Std Gain Horn Antenna 18-26.5 GHz	ETS Systems	03-Nov-10	24
TMS81	6502	Active Loop Antenna	EMCO	13-Apr-10	24
TMS82	8449B	Pre Amplifier 1 - 26 GHz	Agilent	29-Oct-10	12
TMS933	CBL6141A	Bilog Antenna 30MHz - 2GHz	York EMC	09-Sep-10	36

11. Auxiliary equipment

11.1 Auxiliary equipment supplied by NXP Semiconductors

Auxiliary equipment used for the purpose of test supplied by the above has been listed below

Manufacturer	Description	Model Number	Serial Number
NXP Semiconductor	short RF lead	not available	not available
NXP Semiconductor	PCB Motherboard	DR1048	not available
NXP Semiconductor	USB to RS232 Programming Lead	not available	not available

11.2 Auxiliary equipment supplied by RN Electronics Limited

Auxiliary equipment used for the purpose of test supplied by the above has been listed below

RN Number	Manufacturer	Description	Model Number	Serial Number
I017	DELL	Laptop PC	Inspiron 5150	CN-0W0940-12961-44J-2047

12. Modifications

In order for the EUT to produce the results shown within this report the following modifications, if any, were implemented.

12.1 Modifications before test

There were no modifications made by R.N. Electronics Ltd before testing commenced.

12.2 Modifications during test

There were no modifications made by R.N. Electronics Ltd during testing.

n.b. The settings of the device - continuous transmit, power level & frequency were set by test software not normally available to the user.

13. Compliance information

Products subject to the Declaration of Conformity procedure are required to be supplied with a compliance information statement. A copy of this statement may be included here:

NOT APPLICABLE - Device to be Certified.

14 Description of Test Sites

Site A	Radio / Calibration Laboratory and anechoic chamber
Site B	Semi-anechoic chamber
Site B1	Control Room for Site B
Site C	Transient Laboratory
Site D	Screened Room (Conducted Immunity)
Site E	Screened Room (Control Room for Site D)
Site F	Screened Room (Conducted Emissions) VCCI Registration No. C-2823
Site K	Screened Room (Control Room for Site M)
Site M	3m Semi-anechoic chamber (indoor OATS) FCC Registration No. 293246
Site Q	Fully-anechoic chamber
Site OATS	3m and 10m Open Area Test Site FCC Registration No. 293246 IC Registration No. 5612A-1 VCCI Registration No. R-2580

15 Abbreviations and Units

%	Percent	LO	Local Oscillator
μ A/m	microAmps per metre	mA	milliAmps
μ V	microVolts	max	maximum
μ W	microWatts	mbar	milliBars
AC	Alternating Current	Mbit/s	MegaBits per second
ALSE	Absorber Lined Screened Enclosure	MHz	MegaHertz
AM	Amplitude Modulation	mic	Microphone
Amb	Ambient	min	minimum
ATPC	Automatic Transmit Power Control	mm	milliMetres
BER	Bit Error Rate	ms	milliSeconds
$^{\circ}$ C	Degrees Celsius	mW	milliWatts
C/I	Carrier / Interferer	NA	Not Applicable
CEPT	European Conference of Postal and Telecommunications Administrations	nom	Nominal
COFDM	Coherent OFDM	nW	nanoWatt
CS	Channel Spacing	OATS	Open Area Test Site
CW	Continuous Wave	OFDM	Orthogonal Frequency Division Multiplexing
dB	deciBels	ppm	Parts per million
dB μ A/m	deciBels relative to 1 μ A/m	PRBS	Pseudo Random Bit Sequence
dB μ V	deciBels relative to 1 μ V	QAM	Quadrature Amplitude Modulation
dBc	deciBels relative to Carrier	QPSK	Quadrature Phase Shift Keying
dBm	deciBels relative to 1mW	R&TTE	Radio and Telecommunication Terminal Equipment
DC	Direct Current	RBW	Resolution Bandwidth
DTA	Digital Transmission Analyser	Ref	Reference
EIRP	Equivalent Isotropic Radiated Power	RF	Radio Frequency
ERP	Effective Radiated Power	RFC	Remote Frequency Control
EU	European Union	RSL	Received Signal Level
EUT	Equipment Under Test	RTP	Room Temperature and Pressure
FM	Frequency Modulation	RTPC	Remote Transmit Power Control
FSK	Frequency Shift Keying	Rx	Receiver
g	Grams	s	Seconds
GHz	GigaHertz	SINAD	Signal to Noise And Distortion
Hz	Hertz	Tx	Transmitter
IF	Intermediate Frequency	V	Volts
kHz	kiloHertz		
LBT	Listen Before Talk		



Certificate of Test 4717/1

The equipment noted below has been tested by **R.N. Electronics Limited** and conforms with the relevant subpart of FCC 47CFR part 15, subject to deviations as detailed in this report.

This certificate relates to the unit, as identified by unique serial number(s) and further detailed in the referenced report, in the condition(s) at the time it was tested. It does not relate to any other similar equipment and performance of the product before or after the test cannot be guaranteed. Furthermore, this is a certificate of test only and should not be confused with an equipment authorisation.

Equipment: IEEE 802.15.4 wireless controller module

Model Number(s): JN5148-T01-M04

Unique Serial Number(s): 1111800114

Manufacturer: NXP Laboratories UK Ltd
Furnival Street
Sheffield
S1 4QT

Customer Purchase Order Number: GB628200012562

R.N. Electronics Limited
Report Number: 05-481/4717/1/11

Test Standards: FCC 47CFR Part 15C:
Effective date **October 1st 2010**,
Class DTS Intentional Radiator

Date: 24th to 27th May 2011

For and on behalf of
R.N. Electronics Limited

Signature:

Notes:

QMF21J – 3: FCC PART 15C: RNE ISSUE 02: - JUN 10

RN Electronics Ltd

www.RNelectronics.com

Arnolds Court, Arnolds Farm Lane, Mountnessing, Brentwood, Essex CM13 1UT
Tel: +44 1277 352219 E-mail: sales@RNelectronics.com Fax: +44 1277 352968