FCC&IC Radio Test Report

FCC ID: TZI-MCD800

IC: 7234A-MCD800

This report concerns (check one): Original Grant Class II Change

Project No. : 1405C218

Equipment: TURNTABLE AUDIO SYSTEM

Model Name : MC-D800

Applicant: ARTS ELECTRONICS CO LTDAddress: SHANGXING LU SHANGJIAO

COMMUNITY CHANGAN TOWN, DONGGUAN 523878 CHINA

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: May. 19, 2014

Date of Test: May. 19, 2014~ May. 27, 2014

Issued Date: May. 28, 2014

Testing Engineer :

(David Mao)

Technical Manager

(Leo Hung)

Authorized Signatory:

(Steven Lu)

Neutron Engineering Inc.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, China.

TEL: 0769-8318-3000 FAX: 0769-8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **CHINA**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: NEI-FICP-1-1405C218 Page 2 of 111

Neutron Engineering Inc.=

	Table of Contents	Page
1.	CERTIFICATION	7
2.	SUMMARY OF TEST RESULTS	8
	2.1 TEST FACILITY	9
	2.2 MEASUREMENT UNCERTAINTY	9
3.	GENERAL INFORMATION	10
	3.1 GENERAL DESCRIPTION OF EUT	10
	3.2 DESCRIPTION OF TEST MODES	12
	3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
	3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TES	
	3.5 DESCRIPTION OF SUPPORT UNITS	13
4	EMC EMISSION TEST	14
4.		
	4.1 CONDUCTED EMISSION MEASUREMENT 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14 14
	4.1.2 TEST PROCEDURE	14
	4.1.3 DEVIATION FROM TEST STANDARD	14
	4.1.4 TEST SETUP	15
	4.1.5 EUT OPERATING CONDITIONS	15
	4.1.6 EUT TEST CONDITIONS 4.1.7 TEST RESULTS	15 15
	4.2 RADIATED EMISSION MEASUREMENT	16
	4.2.1 RADIATED EMISSION MEASUREMENT	16
	4.2.2 TEST PROCEDURE	17
	4.2.3 DEVIATION FROM TEST STANDARD	17
	4.2.4 TEST SETUP	18
	4.2.5 EUT OPERATING CONDITIONS 4.2.6 EUT TEST CONDITIONS	19 19
	4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
	4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)	20
	4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	20
5.	NUMBER OF HOPPING CHANNEL	21
	5.1 APPLIED PROCEDURES	21
	5.1.1 TEST PROCEDURE	21
	5.1.2 DEVIATION FROM STANDARD	21
	5.1.3 TEST SETUP 5.1.4 EUT OPERATION CONDITIONS	21 21
	5.1.5 EUT TEST CONDITIONS	21
	5.1.6 TEST RESULTS	21
6.	AVERAGE TIME OF OCCUPANCY	22

Report No.: NEI-FICP-1-1405C218

Neutron Engineering Inc.————	
Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	22
6.1.1 TEST PROCEDURE	22
6.1.2 DEVIATION FROM STANDARD	22
6.1.3 TEST SETUP	22
6.1.4 EUT OPERATION CONDITIONS 6.1.5 EUT TEST CONDITIONS	23 23
6.1.6 TEST RESULTS	23
7 . HOPPING CHANNEL SEPARATION MEASUREMENT	24
7.1 APPLIED PROCEDURES / LIMIT	24
7.1.1 TEST PROCEDURE	24
7.1.2 DEVIATION FROM STANDARD	24
7.1.3 TEST SETUP	24
7.1.4 EUT TEST CONDITIONS	24
7.1.5 TEST RESULTS	24
8 . BANDWIDTH TEST	25
8.1 APPLIED PROCEDURES	25
8.1.1 TEST PROCEDURE	25
8.1.2 DEVIATION FROM STANDARD	25
8.1.3 TEST SETUP	25
8.1.4 EUT OPERATION CONDITIONS	25
8.1.5 EUT TEST CONDITIONS 8.1.6 TEST RESULTS	25 25
9 . PEAK OUTPUT POWER TEST	25 26
	_
9.1 APPLIED PROCEDURES / LIMIT	26
9.1.1 TEST PROCEDURE	26
9.1.2 DEVIATION FROM STANDARD 9.1.3 TEST SETUP	26 26
9.1.4 EUT OPERATION CONDITIONS	26
9.1.5 EUT TEST CONDITIONS	26
9.1.6 TEST RESULTS	26
10 . ANTENNA CONDUCTED SPURIOUS EMISSION	27
10.1 APPLIED PROCEDURES / LIMIT	27
10.1.1 TEST PROCEDURE	27
10.1.2 DEVIATION FROM STANDARD	27
10.1.3 TEST SETUP	27
10.1.4 EUT OPERATION CONDITIONS	27
10.1.5 EUT TEST CONDITIONS	27

12. EUT TEST PHOTO

10.1.6 TEST RESULTS

11. MEASUREMENT INSTRUMENTS LIST

27

28

30

Neutron Engineering Inc.=

CUTRO	Table of Contents	Page
ATTACHMENT	A - CONDUCTED EMISSION	34
ATTACHMENT	B - RADIATED EMISSION (9KHZ-30MHZ)	37
ATTACHMENT	C - RADIATED EMISSION (30MHZ TO 1000MHZ)	39
ATTACHMENT	D - RADIATED EMISSION (ABOVE 1000MHZ)	46
ATTACHMENT	E - NUMBER OF HOPPING CHANNEL	71
ATTACHMENT	F - AVERAGE TIME OF OCCUPANCY	73
ATTACHMENT	G - HOPPING CHANNEL SEPARATION MEASUREMENT	86
ATTACHMENT	H - BANDWIDTH	91
ATTACHMENT	I - PEAK OUTPUT POWER	96
ATTACHMENT	J - ANTENNA CONDUCTED SPURIOUS EMISSION	101

Report No.: NEI-FICP-1-1405C218 Page 5 of 111



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FICP-1-1405C218	Original Issue.	May. 28, 2014

Report No.: NEI-FICP-1-1405C218 Page 6 of 111

1. CERTIFICATION

Equipment : TURNTABLE AUDIO SYSTEM

Brand Name: TEAC Model Name: MC-D800

Applicant ARTS ELECTRONICS CO LTD Manufacturer: ARTS ELECTRONICS CO LTD

Address : SHANGXING LU SHANGJIAO COMMUNITY CHANGAN TOWN,

DONGGUAN 523878 CHINA

Factory : ARTS ELECTRONICS CO LTD

Address SHANGXING LU SHANGJIAO COMMUNITY CHANGAN TOWN,

DONGGUAN 523878 CHINA
Date of Test : May. 19, 2014~ May. 27, 2014
Test Item : ENGINEERING SAMPLE

Standard(s): FCC Part15, Subpart C: 2013 (15.247) / ANSI C63.4: 2009 /

FCC Public Notice DA 00-705, March 30, 2000.

Canada RSS-210: 2010 RSS-GEN Issue 3, Dec 2010

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FICP-1-1405C218) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: NEI-FICP-1-1405C218 Page 7 of 111

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): 47 CFR Part 15, Subpart C: 2013; Canada RSS-210:2010; RSS-GEN Issue 3, Dec 2010				
Standa	rd(s) Section	T4 14		Damada
FCC	IC	Test Item	Judgment	Remark
15.207	RSS-GEN Issue 3, Dec 2010 7.2.4	Conducted Emission	PASS	
15.247(d)	RSS-210, Issue 8, Annex 8, A8.5	Antenna conducted Spurious Emission	PASS	
15.247 (a)(1)	RSS-210, Issue 8, Annex 8, A8.1(b)	Hopping Channel Separation	PASS	
15.247 (b)(1)	RSS-210, Issue 8, Annex 8, A8.1(b)	Peak Output Power	PASS	
15.247(d) 15.209	RSS-210, Issue 8, Annex 8, Section 8.5	Radiated Spurious Emission	PASS	
15.247 (a)(1)(iii)	RSS-210, Issue 8, Annex 8, A8.1(d)	Number of Hopping Frequency	PASS	
15.247 (a)(1)(iii)	RSS-210, Issue 8, Annex 8, A8.1(d)	Dwell Time	PASS	
15.205	RSS-GEN Issue 3, Dec 2010 7.2.2	Restricted Bands	PASS	
15.203	-	Antenna Requirement	PASS	

Note:

- (1)" N/A" denotes test is not applicable in this test report
- (2) According to FCC Public Notice DA 00-705, March 30, 2000.

Report No.: NEI-FICP-1-1405C218 Page 8 of 111

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dong Guan, China.523792

Neutron's test firm number for FCC: 319330 Neutron's test firm number for IC: 4428B-1

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	Note
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)	Note
		9KHz~30MHz	V	3.79	
		9KHz~30MHz	Н	3.57	
		30MHz ~ 200MHz	V	3.82	
	CISPR	30MHz ~ 200MHz	Н	3.60	
DG-CB03		200MHz ~ 1,000MHz	V	3.86	
DG-CB03		200MHz ~ 1,000MHz	Н	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	Н	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	Н	4.14	

Report No.: NEI-FICP-1-1405C218 Page 9 of 111

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	TURNTABLE AUDIO SYSTEM		
Brand Name	TEAC		
Model Name For FCC	MC-D800		
Model Difference For FCC	N/A		
	Operation Frequency	2402~2480 MHz	
	Modulation Technology	GFSK(1Mbps) π/4-DQPSK(2Mbps)	
Output Power (Max.)	Bit Rate of Transmitter	8-DPSK(3Mbps)	
	Output Power Max.	0.44 dBm(1Mbps) -0.35 dBm(3Mbps)	
Power Source	AC Mains.		
Power Rating	AC 120V ~,60Hz 20W		
Connecting I/O Port(s)	Please refer to the User's Manual		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Report No.: NEI-FICP-1-1405C218 Page 10 of 111



2

		Channe	el List		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3 Table for Filed Antenna

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PIFA	N/A	2.12

Report No.: NEI-FICP-1-1405C218 Page 11 of 111

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode Note (1)
Mode 2	Bluetooth

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission	
Final Test Mode	Description
Mode 2	Bluetooth

For Radiated Emission		
Final Test Mode	Description	
Mode 1	TX Mode Note (1)	

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation, Bandwidth and Peak Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software version		Bluetest	
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters-1Mbps	63	63	63
Parameters-3Mbps	100	100	100

Report No.: NEI-FICP-1-1405C218 Page 12 of 111

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

EUT

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
-	-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	

Report No.: NEI-FICP-1-1405C218 Page 13 of 111

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	Stariuaru
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e For the actual test configuration, please refer to the related Item –EUT Test Photos.


4.1.3 DEVIATION FROM TEST STANDARD

No deviation

Report No.: NEI-FICP-1-1405C218 Page 14 of 111



4.1.4 TEST SETUP

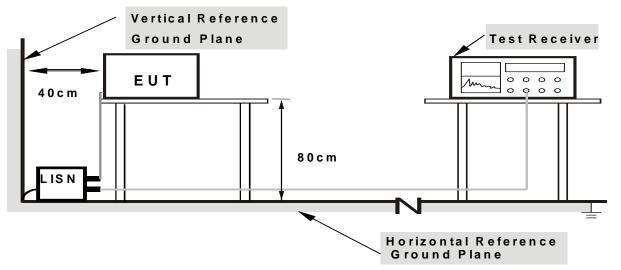

Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

Report No.: NEI-FICP-1-1405C218 Page 15 of 111



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz -1000MHz)

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) & RSS-210 section 2.2& Annex 8 (A8.5), then the 15.209(a) & RSS-Gen limit in the table below has to be followed.

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Fraguency (MHz)	dB(uV/m) (at 3 meters)		
Frequency (MHz)	Peak	Average	
Above 1000	74	54	

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) =20log Emission level (uV/m).

Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	1000 MHz	
Stop Frequency	10th carrier harmonic	
RBW / VBW	1 MHz / 1 MHz for Dook 1 MHz / 10Hz for Average	
(emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average	

Spectrum Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz ~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz ~110KHz for QP detector
Start ~ Stop Frequency	110KHz ~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz ~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

Report No.: NEI-FICP-1-1405C218 Page 16 of 111



4.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

Report No.: NEI-FICP-1-1405C218 Page 17 of 111




4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

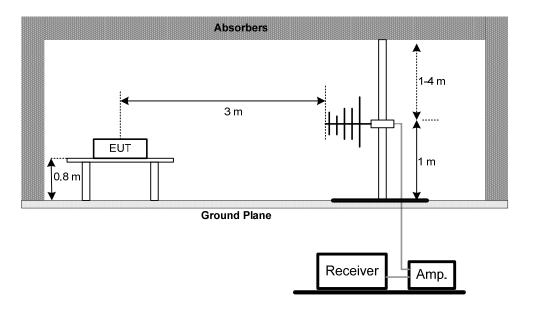


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

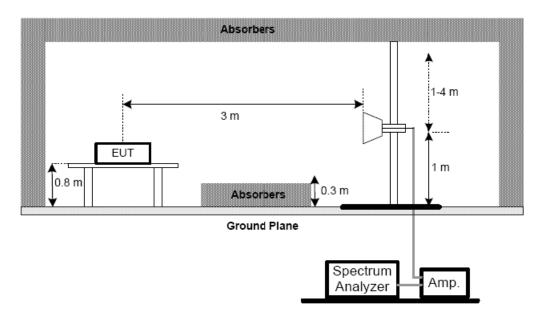

Report No.: NEI-FICP-1-1405C218 Page 18 of 111



(C) For radiated emissions below 30MHz

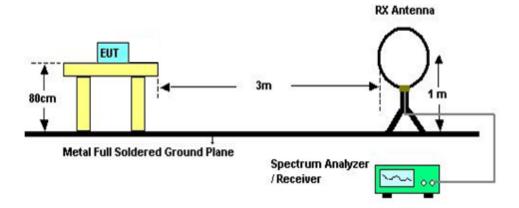

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.5** Unless otherwise a special operating condition is specified in the follows during the testing

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

Report No.: NEI-FICP-1-1405C218 Page 19 of 111

4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (5) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FICP-1-1405C218 Page 20 of 111

5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-210				
Section Test Item Frequency Range (MHz) Result				
15.247(a)(1)(iii) RSS-210, Issue 8, Annex 8, A8.1(d)	Number of Hopping Channel	2400-2483.5	PASS	

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency > Operating Frequency Range	
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time Auto	

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E

Report No.: NEI-FICP-1-1405C218 Page 21 of 111

6. AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-210					
Section Test Item Limit Frequency Range (MHz) Result					
15.247(a)(1)(iii) RSS-210, Issue 8, Annex 8, A8.1(d)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS	

6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- a. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 3.37 x 31.6 = 106.6 within 31.6 seconds.
- j. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 5.06 x 31.6 = 160 within 31.6 seconds.
- k. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

EUT	SPECTRUM	
	ANALYZER	

Report No.: NEI-FICP-1-1405C218 Page 22 of 111



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F

Report No.: NEI-FICP-1-1405C218 Page 23 of 111

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency > Measurement Bandwidth or Channel Separation	
RBW 30 KHz	
VBW	100 KHz
Detector Peak	
Trace Max Hold	
Sweep Time	Auto


7.1.1 TEST PROCEDURE

- a. The EUT must have its hopping function enabled
- b. Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW Sweep = Auto Detector function = Peak Trace = Max Hold

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.1.5 TEST RESULTS

Please refer to the Attachment G

Report No.: NEI-FICP-1-1405C218 Page 24 of 111

8. BANDWIDTH TEST

8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-210				
Section Test Item Frequency Range (MHz)				
15.247(a)(2)		2400-2483.5		
RSS-GEN section 4.6.1	Bandwidth			
RSS-210, Issue 8, Annex 8, A8.1(b)				

Spectrum Parameter	Setting		
Attenuation	Auto		
Span Frequency	> Measurement Bandwidth or Channel Separation		
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)		
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)		
Detector	Peak		
Trace	Max Hold		
Sweep Time	Auto		

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

EUT	·	SPECTRUM
		ANALYZER

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H

Report No.: NEI-FICP-1-1405C218 Page 25 of 111

9. PEAK OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C/ RSS-GEN and RSS-210					
Section Test Item Limit Frequency Range (MHz) Result					
15.247(b)(1) RSS-GEN section 4.8 RSS-210, Issue 8, Annex 8, A8.1(b)	Peak Output Power	0.125 Watt or 21dBm	2400-2483.5	PASS	

9.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP

EUT	SPECTRUM	
	ANALYZER	

9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

9.1.6 TEST RESULTS

Please refer to the Attachment I

Report No.: NEI-FICP-1-1405C218 Page 26 of 111

10. ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

10.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

10.1.2 DEVIATION FROM STANDARD

No deviation.

10.1.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

10.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

10.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

10.1.6 TEST RESULTS

Please refer to the Attachment J

Report No.: NEI-FICP-1-1405C218 Page 27 of 111

11. MEASUREMENT INSTRUMENTS LIST

	Conducted Emission Measurement						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until		
1	LISN	EMCO	3816/2	00052765	Mar. 29, 2015		
2	LISN	R&S	ENV216	101447	Mar. 29, 2015		
3	Test Cable	N/A	C_17	N/A	Mar. 14, 2015		
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 29, 2015		
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 29, 2015		

	Radiated Emission Measurement								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until				
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 29, 2015				
2	Amplifier	HP	8447D	2944A09673	Mar. 29, 2015				
3	Test Receiver	R&S	ESCI	100382	Mar. 29, 2015				
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014				
5	Antenna	ETS	3115	00075789	Mar. 29, 2015				
6	Amplifier	Agilent	8449B	3008A02274	Mar. 29, 2015				
7	Spectrum	Spectrum Agilent E		US39240143	Nov. 09, 2014				
8	Test Cable	HUBER+SUHNER	C-45	N/A	Jan. 14, 2015				
9	Controller	СТ	SC100	N/A	N/A				
10	Horn Antenna	EMCO	3115	9605-4803	Mar. 29, 2015				
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Mar. 29, 2015				

Report No.: NEI-FICP-1-1405C218 Page 28 of 111

Number of Hopping Channel							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until		
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014		

Average Time of Occupancy							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until		
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014		

	Hopping Channel Separation Measurement								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until				
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014				

	Bandwidth							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until			
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014			

Peak Output Power							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until		
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014		

Antenna Conducted Spurious Emission							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until		
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014		

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

Report No.: NEI-FICP-1-1405C218 Page 29 of 111



12. EUT TEST PHOTO

Conducted Measurement Photos





Report No.: NEI-FICP-1-1405C218 Page 30 of 111



Radiated Measurement Photos 9KHz to 30MHz





Report No.: NEI-FICP-1-1405C218 Page 31 of 111



Radiated Measurement Photos 30MHz to 1000MHz






Report No.: NEI-FICP-1-1405C218 Page 32 of 111




Radiated Measurement Photos Above 1000MHz

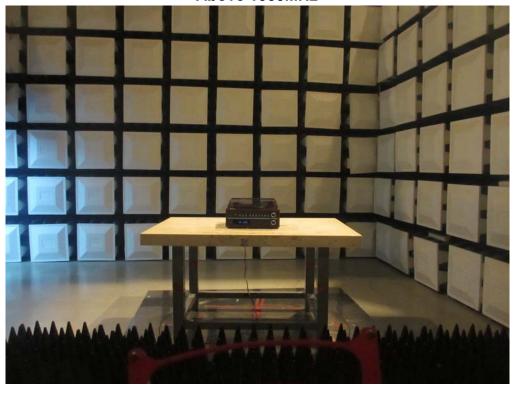



Report No.: NEI-FICP-1-1405C218 Page 33 of 111

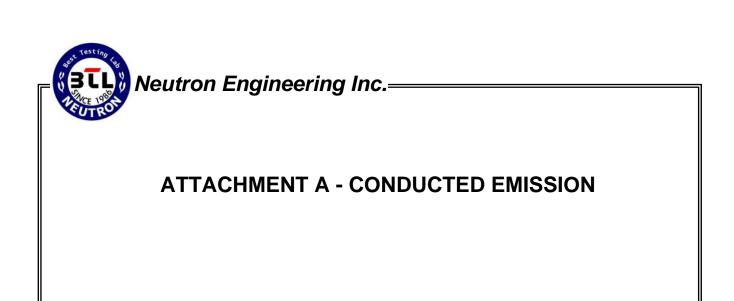


Report No.: NEI-FICP-1-1405C218 Page 34 of 111

Neutron Engineering Inc.

Test Mode: TX Mode

Line

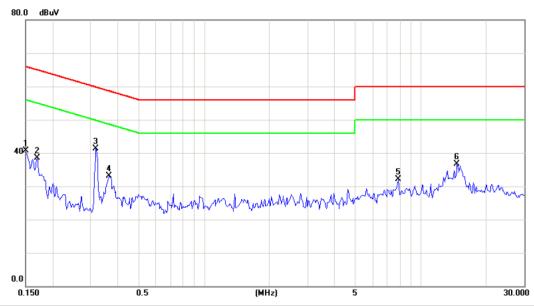


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	31.23	9.52	40.75	66.00	-25.25	peak	
2		0.1695	29.02	9.53	38.55	64.98	-26.43	peak	
3	*	0.3180	31.80	9.60	41.40	59.76	-18.36	peak	
4		0.3648	23.43	9.63	33.06	58.62	-25.56	peak	
5		7.8631	22.04	10.02	32.06	60.00	-27.94	peak	
6		14.6951	26.50	10.22	36.72	60.00	-23.28	peak	

Report No.: NEI-FICP-1-1405C218 Page 35 of 111


Neutron Engineering Inc.



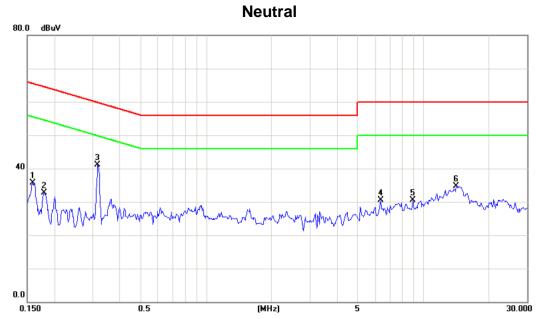

No. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1590	25.99	9.63	35.62	65.52	-29.90	peak	
2	0.1796	23.00	9.62	32.62	64.50	-31.88	peak	
3 *	0.3180	31.42	9.62	41.04	59.76	-18.72	peak	
4	6.3631	20.59	9.94	30.53	60.00	-29.47	peak	
5	8.9296	20.49	10.05	30.54	60.00	-29.46	peak	
6	14.2070	24.53	10.26	34.79	60.00	-25.21	peak	

Report No.: NEI-FICP-1-1405C218 Page 36 of 111

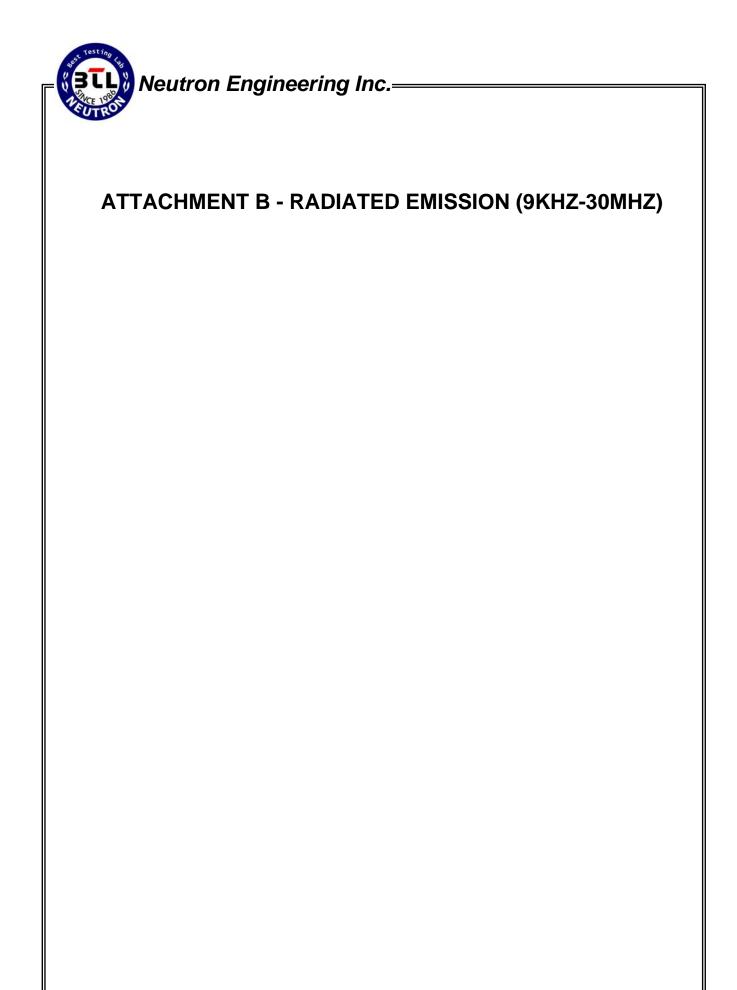

Report No.: NEI-FICP-1-1405C218 Page 37 of 111




Test Mode: TX Mode 2402MHz

Freq.	Ant.	Reading(RA)	Corr.Factor(CF)	Measured(FS)	Limits(QP)	Margin	Note
(MHz)	0°/90°	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	NOIE
0.00942	0°	68.35	24.30	92.65	128.12	-35.47	AVG
0.00944	0°	72.35	24.30	96.65	148.12	-51.47	PEAK
0.01350	0°	70.35	24.30	94.65	125.00	-30.35	AVG
0.01370	0°	79.35	24.30	103.65	145.00	-41.35	PEAK
0.02450	0°	56.36	24.02	80.38	119.82	-39.45	AVG
0.02460	0°	60.12	24.02	84.14	139.82	-55.69	PEAK
0.03250	0°	61.36	23.51	84.87	117.37	-32.50	AVG
0.03280	0°	65.38	23.51	88.89	137.37	-48.48	PEAK
0.56700	0°	18.72	20.01	38.73	72.53	-33.80	QP
1.75350	0°	18.95	19.52	38.47	69.54	-31.07	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.00935	90°	76.35	24.30	100.65	128.19	-27.54	AVG
0.00936	90°	82.36	24.30	106.66	148.19	-41.53	PEAK
0.0236	90°	56.38	24.07	80.45	120.15	-39.69	AVG
0.0237	90°	59.35	24.07	83.42	140.15	-56.72	PEAK
0.0317	90°	57.35	23.56	80.91	117.58	-36.67	AVG
0.0318	90°	58.35	23.56	81.91	137.58	-55.67	PEAK
0.0428	90°	59.35	22.86	82.21	114.98	-32.77	AVG
0.0429	90°	63.35	22.86	86.21	134.98	-48.77	PEAK
0.4913	90°	17.45	19.82	37.27	73.78	-36.51	QP
1.7155	90°	18.63	19.53	38.16	69.54	-31.38	QP


Report No.: NEI-FICP-1-1405C218 Page 38 of 111

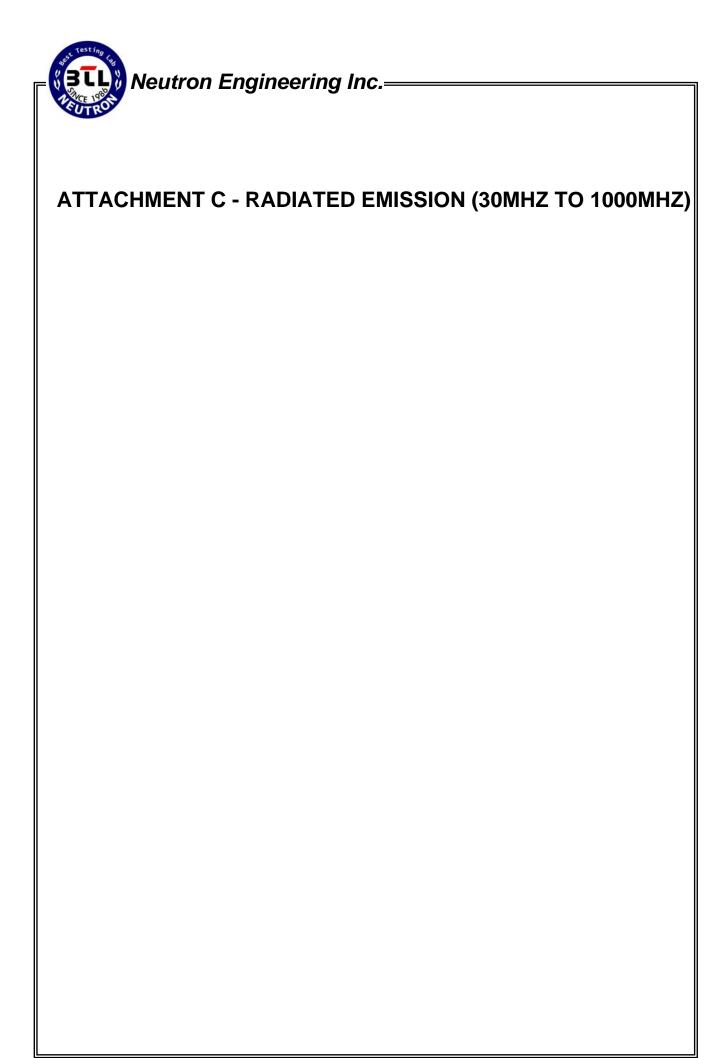

Report No.: NEI-FICP-1-1405C218 Page 39 of 111


Test Mode: TX 2402MHz _CH00_1Mbps

Vertical

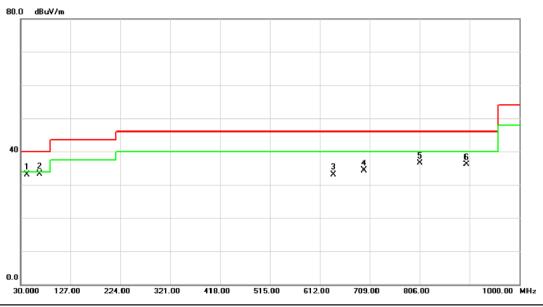


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		41.6400	47.55	-14.44	33.11	40.00	-6.89	peak	
2	*	66.8600	48.69	-15.35	33.34	40.00	-6.66	peak	
3		638.1900	39.51	-6.42	33.09	46.00	-12.91	peak	
4		698.3300	38.74	-4.45	34.29	46.00	-11.71	peak	
5		806.0000	38.45	-1.92	36.53	46.00	-9.47	peak	
6		897.1800	35.80	0.37	36.17	46.00	-9.83	peak	

Report No.: NEI-FICP-1-1405C218 Page 40 of 111



Horizontal

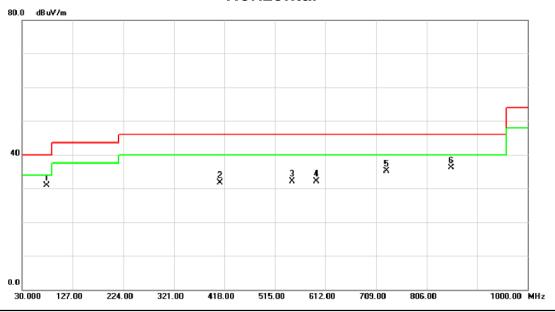


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	76.5600	47.03	-16.06	30.97	40.00	-9.03	peak	
2		409.2700	41.35	-9.59	31.76	46.00	-14.24	peak	
3		547.9800	38.12	-6.04	32.08	46.00	-13.92	peak	
4		594.5400	40.04	-7.94	32.10	46.00	-13.90	peak	
5		729.3700	40.06	-4.94	35.12	46.00	-10.88	peak	
6		852.5600	40.06	-3.93	36.13	46.00	-9.87	peak	

Report No.: NEI-FICP-1-1405C218 Page 41 of 111

Test Mode: TX 2441MHz _CH39_1Mbps

Vertical

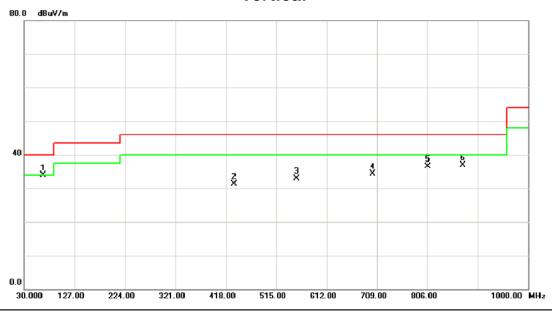


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	66.8600	49.19	-15.35	33.84	40.00	-6.16	peak	
2		433.5200	40.35	-9.07	31.28	46.00	-14.72	peak	
3		553.8000	38.94	-6.03	32.91	46.00	-13.09	peak	
4		700.2700	38.67	-4.42	34.25	46.00	-11.75	peak	
5		806.0000	38.45	-1.92	36.53	46.00	- 9. 4 7	peak	
6		873.9000	38.73	-1.88	36.85	46.00	-9.15	peak	

Report No.: NEI-FICP-1-1405C218 Page 42 of 111

Test Mode: TX 2441MHz _CH39_1Mbps

Horizontal

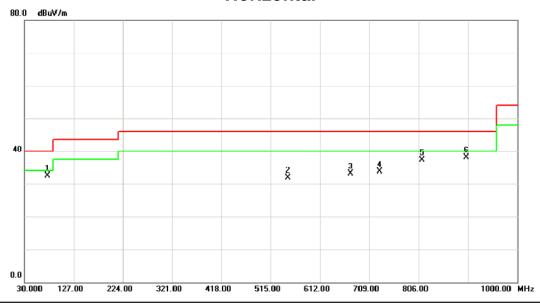


No.	Mk	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	75.5900	48.51	-15.94	32.57	40.00	-7.43	peak	
2		548.9500	37.78	-5.94	31.84	46.00	-14.16	peak	
3		672.1400	38.24	-5.22	33.02	46.00	-12.98	peak	
4		729.3700	38.56	-4.94	33.62	46.00	-12.38	peak	
5		812.7900	39.61	-2.26	37.35	46.00	-8.65	peak	
6		900.0900	37.50	0.63	38.13	46.00	-7.87	peak	

Report No.: NEI-FICP-1-1405C218 Page 43 of 111

Test Mode: TX 2480MHz _CH78_1Mbps

Vertical

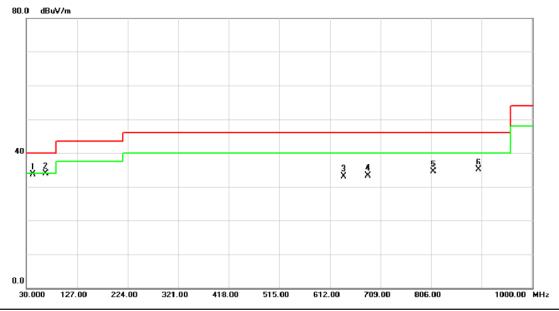

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		41.6400	48.05	-14.44	33.61	40.00	-6.39	peak	
2	*	66.8600	49.19	-15.35	33.84	40.00	-6. 1 6	peak	
3		638.1900	39.51	-6.42	33.09	46.00	-12.91	peak	
4		684.7500	38.16	-4.86	33.30	46.00	-12.70	peak	
5		809.8800	36.69	-2.12	34.57	46.00	-11.43	peak	
6		897.1800	34.80	0.37	35.17	46.00	-10.83	peak	

Report No.: NEI-FICP-1-1405C218 Page 44 of 111


Test Mode: TX 2480MHz _CH78_1Mbps

Horizontal



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		76.5600	48.03	-16.06	31.97	40.00	-8.03	peak	
2		548.9500	38.28	-5.94	32.34	46.00	-13.66	peak	
3		672.1400	39.24	-5.22	34.02	46.00	-11.98	peak	
4		729.3700	39.56	- 4.94	34.62	46.00	-11 .38	peak	
5		812.7900	38.61	-2.26	36.35	46.00	-9.65	peak	
6	*	900.0900	37.50	0.63	38.13	46.00	-7.87	peak	

Report No.: NEI-FICP-1-1405C218 Page 45 of 111

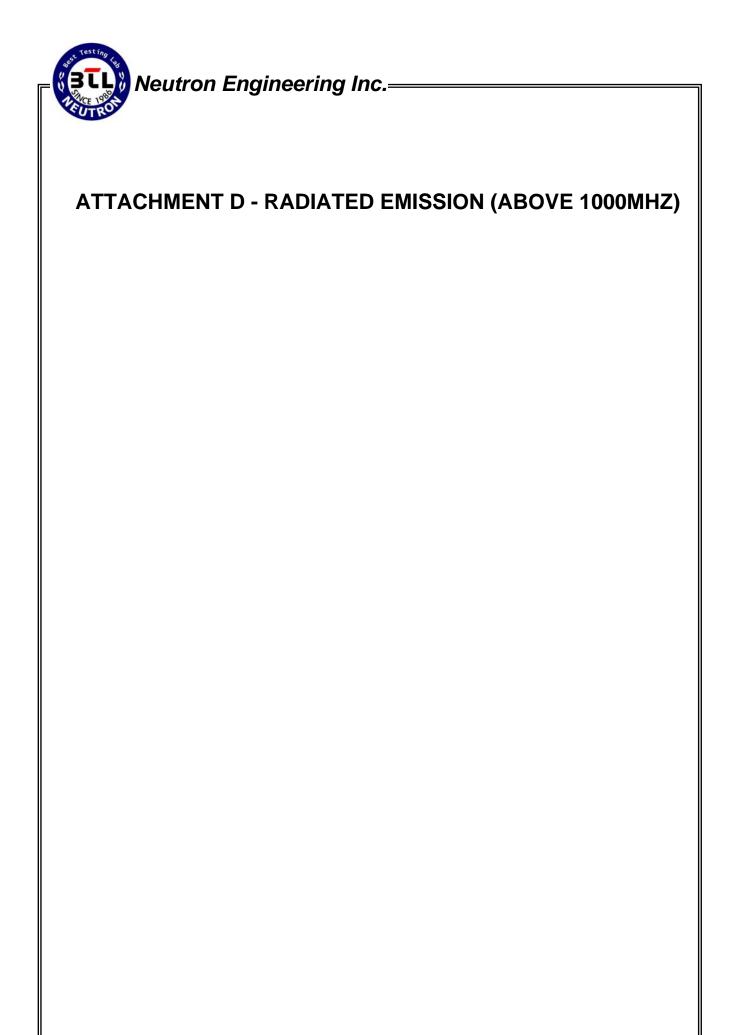


Report No.: NEI-FICP-1-1405C218 Page 46 of 111



Orthogonal Axis: X
Test Mode: TX 2402MHz _CH00_1Mbps

Vertical

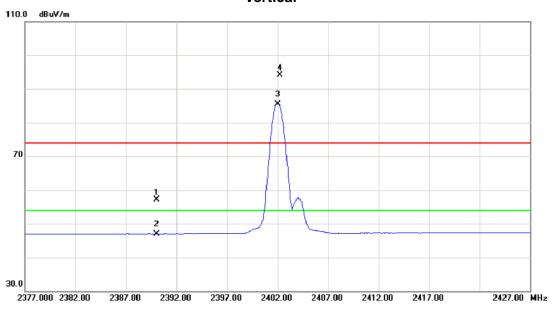


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Över		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	23.77	33.38	57.15	74.00	-16.85	peak	
2		2390.000	13.57	33.38	46.95	54.00	-7.05	AVG	
3	*	2402.000	52.18	33.41	85.59	54.00	31.59	AVG	Fundamental frequency, no limit
4	X	2402.200	60.78	33.41	94.19	74.00	20.19	peak	Fundamental frequency, no limit

Report No.: NEI-FICP-1-1405C218 Page 47 of 111



Orthogonal Axis: X
Test Mode: TX 2402MHz _CH00_1Mbps

Vertical

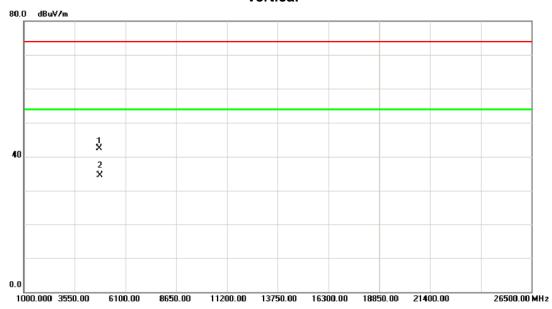


No.	Mł	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4803.880	36.16	6.39	42.55	74.00	-31.45	peak	
2	×	4803.880	28.12	6.39	34.51	54.00	-19.49	AVG	

Report No.: NEI-FICP-1-1405C218 Page 48 of 111



Test Mode: TX 2402MHz _CH00_1Mbps

Horizontal

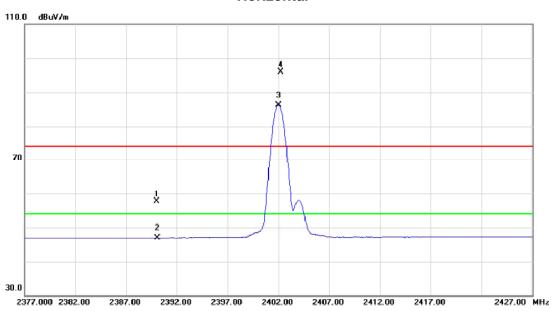


No.	MI	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	24.32	33.38	57.70	74.00	-16.30	peak	
2		2390.000	13.56	33.38	46.94	54.00	- 7.06	AVG	
3	*	2402.000	52.65	33.41	86.06	54.00	32.06	AVG	Fundamental frequency, no limit
4	Χ	2402.200	62.48	33.41	95.89	74.00	21.89	peak	Fundamental frequency, no limit

Report No.: NEI-FICP-1-1405C218 Page 49 of 111



Test Mode: TX 2402MHz _CH00_1Mbps

Horizontal

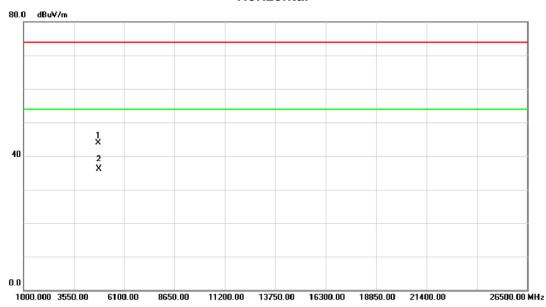


No.	Mk	. Freq.	Reading Level		Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.040	37.49	6.39	43.88	74.00	-30.12	peak	
2	*	4804.040	29.75	6.39	36.14	54.00	-17.86	AVG	

Report No.: NEI-FICP-1-1405C218 Page 50 of 111



Orthogonal Axis: X
Test Mode: TX 2441MHz _CH39_1Mbps

Vertical

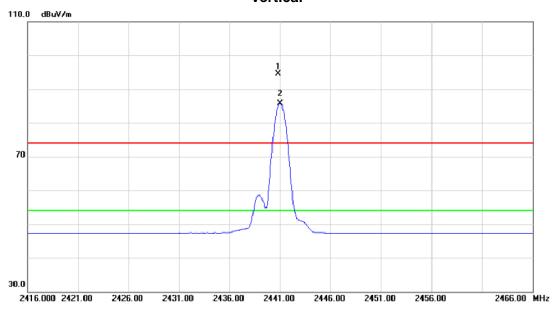


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2440.850	60.96	33.51	94.47	74.00	20.47	peak	Fundamental frequency, no limit
2	*	2441.000	52.11	33.51	85.62	54.00	31.62	AVG	Fundamental frequency, no limit

Report No.: NEI-FICP-1-1405C218 Page 51 of 111



Test Mode: TX 2441MHz _CH39_1Mbps

Vertical

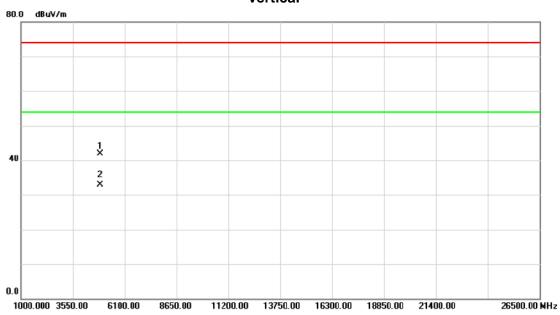


No.	M	k. Fr	eq.		Correct Factor	Measure- ment	Limit	Over		
		MI	łz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.0	000	35.24	6.57	41.81	74.00	-32.19	peak	
2	*	4882.0	000	26.25	6.57	32.82	54.00	-21.18	AVG	

Report No.: NEI-FICP-1-1405C218 Page 52 of 111

Orthogonal Axis: X

Test Mode: TX 2441MHz _CH39_1Mbps

Horizontal

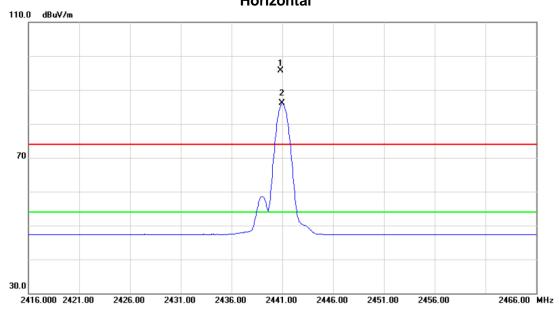


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2440.850	62.13	33.51	95.64	74.00	21.64	peak	Fundamental frequency, no limit
2	*	2440.950	52.67	33.51	86.18	54.00	32.18	AVG	Fundamental frequency, no limit

Report No.: NEI-FICP-1-1405C218 Page 53 of 111



Test Mode: TX 2441MHz _CH39_1Mbps

Horizontal

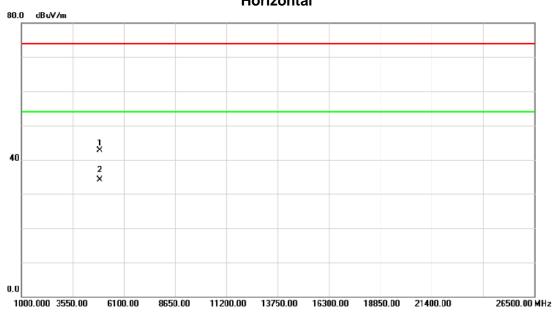


No.	N	۸k.	Freq.		Correct Factor	Measure- ment	Limit	Over		
			MH7	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4	882.000	36.23	6.57	42.80	74.00	-31.20	peak	
2	*	4	882.000	27.62	6.57	34.19	54.00	-19.81	A∀G	

Report No.: NEI-FICP-1-1405C218 Page 54 of 111



Orthogonal Axis: X
Test Mode: TX 2480MHz _CH78_1Mbps

Vertical

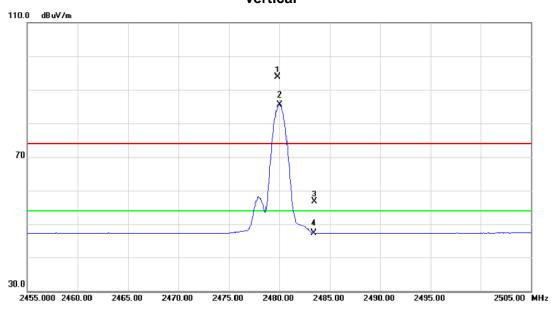


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	d₿	Detector	Comment
1	Χ	2479.850	60.25	33.61	93.86	74.00	19.86	peak	Fundamental frequency, no limit
2	*	2480.000	51.98	33.61	85.59	54.00	31.59	AVG	Fundamental frequency, no limit
3		2483.500	23.11	33.62	56.73	74.00	-17.27	peak	
4		2483.500	13.78	33.62	47.40	54.00	-6.60	AVG	

Report No.: NEI-FICP-1-1405C218 Page 55 of 111



Orthogonal Axis: X
Test Mode: TX 2480MHz _CH78_1Mbps

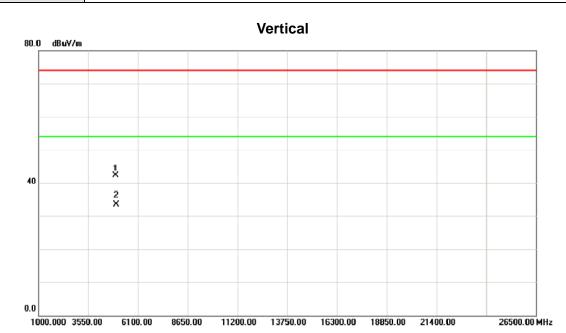


No.	Mk	. Freq.	Reading Level		Measure- ment		Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	35.56	6.74	42.30	74.00	-31.70	peak	
2	*	4960.000	26.70	6.74	33.44	54.00	-20.56	AVG	

Report No.: NEI-FICP-1-1405C218 Page 56 of 111



Test Mode: TX 2480MHz _CH78_1Mbps

Horizontal

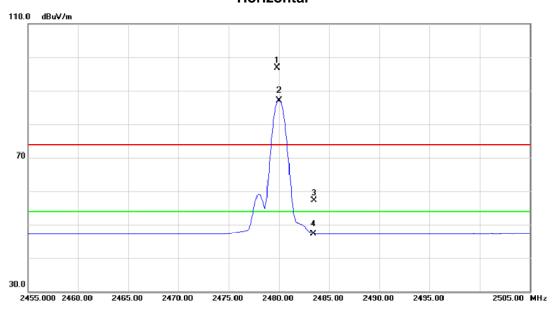


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2479.850	63.31	33.61	96.92	74.00	22.92	peak	Fundamental frequency, no limit
2	*	2480.000	53.58	33.61	87.19	54.00	33.19	AVG	Fundamental frequency, no limit
3		2483.500	23.67	33.62	57.29	74.00	-16.71	peak	
4		2483.500	13.78	33.62	47.40	54.00	-6.60	AVG	

Report No.: NEI-FICP-1-1405C218 Page 57 of 111



Orthogonal Axis: X
Test Mode: TX 2480MHz _CH78_1Mbps

Horizontal

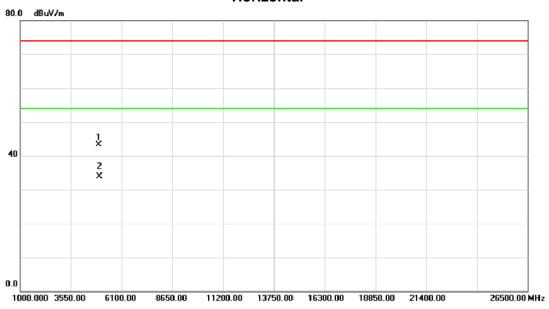

No.	M	c. Freq.	Reading Level		Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4959.960	36.66	6.74	43.40	74.00	-30.60	peak	
2	*	4959.960	27.13	6.74	33.87	54.00	-20.13	AVG	

Report No.: NEI-FICP-1-1405C218 Page 58 of 111



2377.000 2382.00

2387.00

2392.00

Orthogonal Axis: X
Test Mode: TX 2402MHz _CH00_3Mbps

Vertical 110.0 dBuV/m 70 1 2 30.0

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	24.70	33.38	58.08	74.00	-15.92	peak	
2		2390.000	13.57	33.38	46.95	54.00	- 7.05	AVG	
3	*	2402.000	49.87	33.41	83.28	54.00	29.28	AVG	Fundamental frequency, no limit
4	X	2402.150	60.60	33.41	94.01	74.00	20.01	peak	Fundamental frequency, no limit

2407.00

2412.00

2417.00

2427.00 MHz

2397.00 2402.00

Report No.: NEI-FICP-1-1405C218 Page 59 of 111



1000.000 3550.00

6100.00

8650.00

Orthogonal Axis: X
Test Mode: TX 2402MHz _CH00_3Mbps



No.	MI	k. Freq.		Correct Factor	Measure- ment		Over		
		MHz	dBu√	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.120	35.73	6.39	42.12	74.00	-31.88	peak	
2	*	4804.120	26.81	6.39	33.20	54.00	-20.80	AVG	

11200.00 13750.00 16300.00 18850.00 21400.00


26500.00 MHz

Report No.: NEI-FICP-1-1405C218 Page 60 of 111



Test Mode: TX 2402MHz _CH00_3Mbps

Horizontal

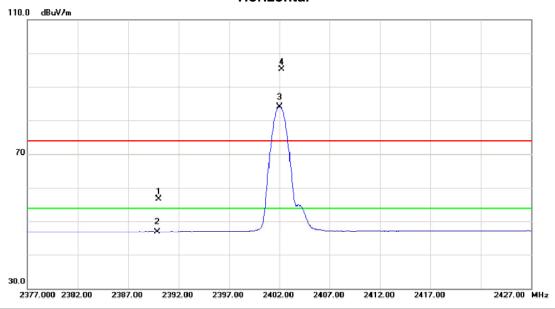


No.	. Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	23.42	33.38	56.80	74.00	-17.20	peak	
2		2390.000	13.56	33.38	46.94	54.00	-7.06	AVG	
3	*	2402.000	50.71	33.41	84.12	54.00	30.12	AVG	Fundamental frequency, no limit
4	X	2402.200	61.90	33.41	95.31	74.00	21.31	peak	Fundamental frequency, no limit

Report No.: NEI-FICP-1-1405C218 Page 61 of 111



Orthogonal Axis: X
Test Mode: TX 2402MHz _CH00_3Mbps

Horizontal

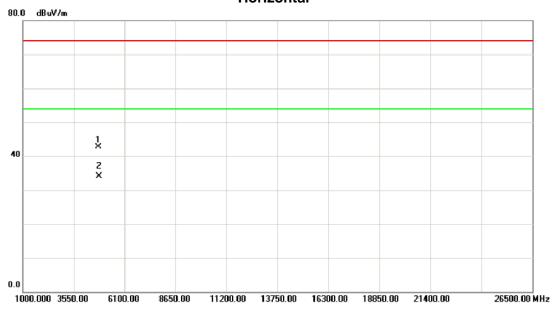


No.	M	c. Freq.	Reading Level		Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.020	36.40	6.39	42.79	74.00	-31.21	peak	
2	*	4804.020	27.65	6.39	34.04	54.00	-19.96	AVG	

Report No.: NEI-FICP-1-1405C218 Page 62 of 111



Orthogonal Axis: X
Test Mode: TX 2441MHz _CH39_3Mbps

Vertical

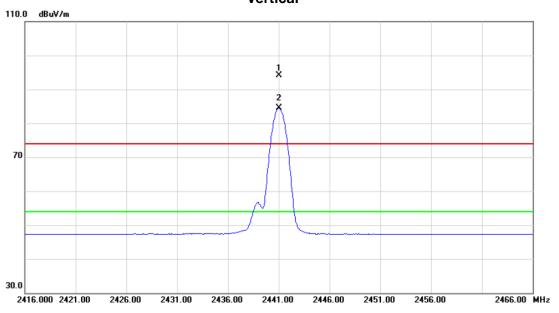


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2441.000	60.56	33.51	94.07	74.00	20.07	peak	Fundamental frequency, no limit
2	*	2441.000	50.94	33.51	84.45	54.00	30.45	AVG	Fundamental frequency, no limit

Report No.: NEI-FICP-1-1405C218 Page 63 of 111



Test Mode: TX 2441MHz _CH39_3Mbps

Vertical

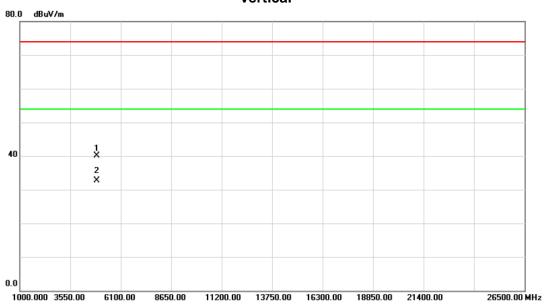


No.	Mk	. Freq.			Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.100	33.62	6.57	40.19	74.00	-33.81	peak	
2	*	4882.100	26.18	6.57	32.75	54.00	-21.25	AVG	

Report No.: NEI-FICP-1-1405C218 Page 64 of 111



Test Mode: TX 2441MHz _CH39_3Mbps

Horizontal

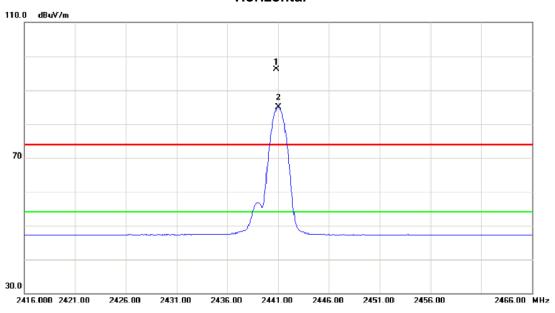


No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2440.850	62.58	33.51	96.09	74.00	22.09	peak	Fundamental frequency, no limit
2	*	2441.000	51.44	33.51	84.95	54.00	30.95	AVG	Fundamental frequency, no limit

Report No.: NEI-FICP-1-1405C218 Page 65 of 111



Test Mode: TX 2441MHz _CH39_3Mbps

Horizontal

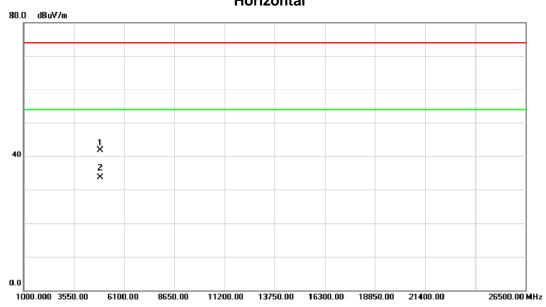


No.	M	k. Freq.			Measure- ment		Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.080	35.43	6.57	42.00	74.00	-32.00	peak	
2	*	4882.080	27.12	6.57	33.69	54.00	-20.31	AVG	

Report No.: NEI-FICP-1-1405C218 Page 66 of 111



Orthogonal Axis: X
Test Mode: TX 2480MHz _CH78_3Mbps

Vertical

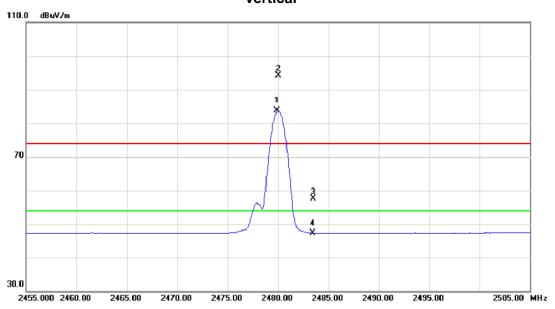


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2479.900	50.24	33.61	83.85	54.00	29.85	AVG	Fundamental frequency, no limit
2	X	2480.050	60.62	33.61	94.23	74.00	20.23	peak	Fundamental frequency, no limit
3		2483.500	23.98	33.62	57.60	74.00	-16.40	peak	
4		2483.500	13.74	33.62	47.36	54.00	-6.64	AVG	

Report No.: NEI-FICP-1-1405C218 Page 67 of 111



Test Mode: TX 2480MHz _CH78_3Mbps

Vertical

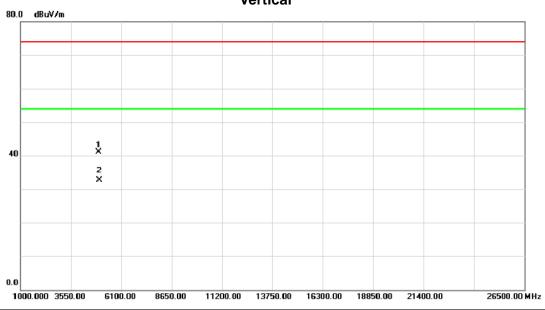


No.	MI	k. F	req.	Reading Level		Measure- ment	Limit	Over		
		M	lHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.	360	34.34	6.74	41.08	74.00	-32.92	peak	
2	*	4960.	360	25.91	6.74	32.65	54.00	-21.35	AVG	

Report No.: NEI-FICP-1-1405C218 Page 68 of 111



Test Mode: TX 2480MHz _CH78_3Mbps

Horizontal

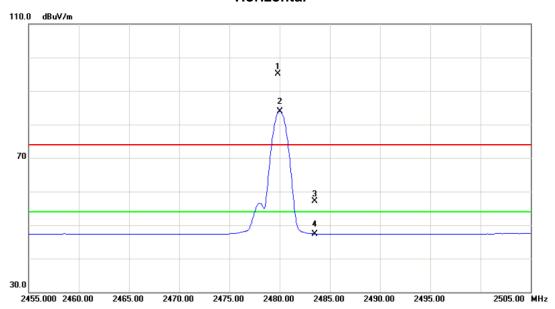


	No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
_	1	X	2479.850	61.53	33.61	95.14	74.00	21.14	peak	Fundamental frequency, no limit
_	2	*	2480.000	50.39	33.61	84.00	54.00	30.00	AVG	Fundamental frequency, no limit
_	3		2483.500	23.55	33.62	57.17	74.00	-16.83	peak	
	4		2483.500	13.78	33.62	47.40	54.00	-6.60	AVG	

Report No.: NEI-FICP-1-1405C218 Page 69 of 111



Test Mode: TX 2480MHz _CH78_3Mbps

Horizontal

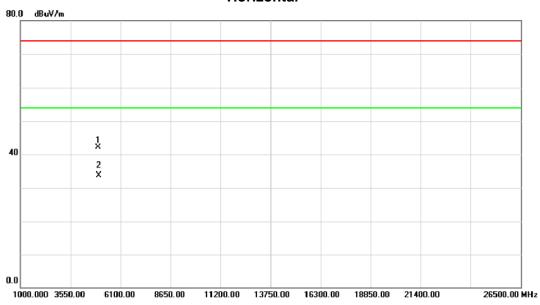


No.	Mk	. Freq.	Reading Level		Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dΒ	Detector	Comment
1		4960.060	35.36	6.74	42.10	74.00	-31.90	peak	
2	*	4960.060	26.87	6.74	33.61	54.00	-20.39	AVG	

Report No.: NEI-FICP-1-1405C218 Page 70 of 111

Report No.: NEI-FICP-1-1405C218 Page 71 of 111





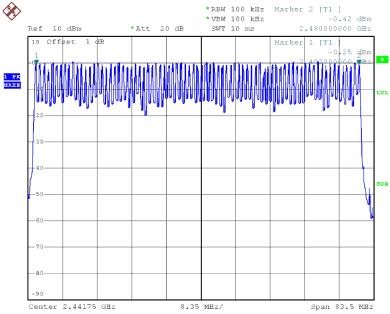


Date: 25.MAY.2014 17:54:13

Test Mode Hopping Mode_3Mbps

Number of Hopping Channel

70

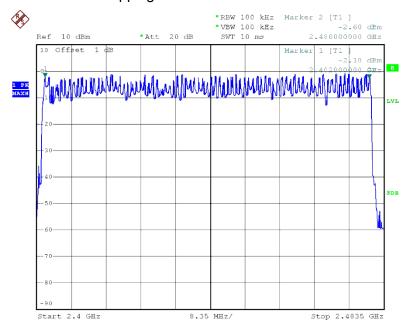

Date: 25.MAY.2014 18:43:14

Report No.: NEI-FICP-1-1405C218 Page 72 of 111

Report No.: NEI-FICP-1-1405C218 Page 73 of 111


Test Mode: CH00_1Mbps					
Data Packet Frequency Pulse Duration Dwell Time Limits (MHz) (ms) (s) (s)					
DH5	2402	3.1500	0.3360	0.4000	
DH3	2402	1.8300	0.2928	0.4000	
DH1	2402	0.5400	0.1728	0.4000	

Test Mode: CH39_1Mbps					
Data Packet Frequency Pulse Duration Dwell Time Limits (MHz) (ms) (s) (s)					
DH5	2441	3.1500	0.3360	0.4000	
DH3	2441	1.8700	0.2992	0.4000	
DH1	2441	0.5500	0.1760	0.4000	

Test Mode: CH78_1Mbps					
Data Packet Frequency Pulse Duration Dwell Time Limits (MHz) (ms) (s) (s)					
DH5	2480	3.1500	0.3360	0.4000	
DH3	2480	1.8500	0.2960	0.4000	
DH1	2480	0.5500	0.1760	0.4000	


Report No.: NEI-FICP-1-1405C218 Page 74 of 111

CH00-DH1

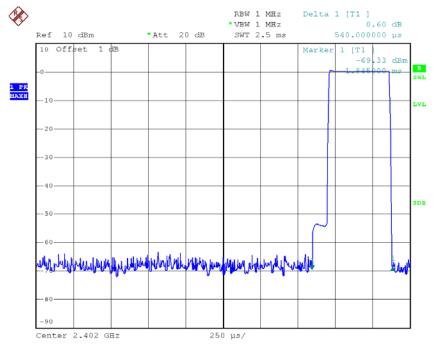


Date: 25.MAY.2014 17:46:50

CH00-DH3

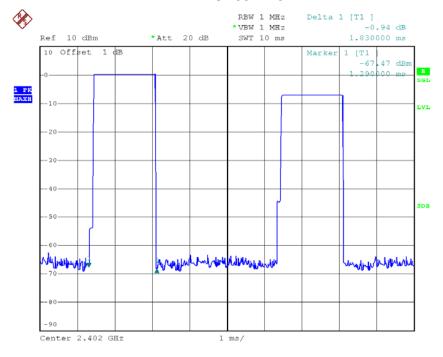


Date: 25.MAY.2014 17:49:44

CH00-DH5

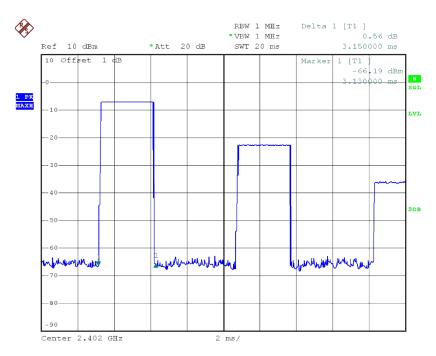


Date: 25.MAY.2014 17:52:49

CH39-DH1

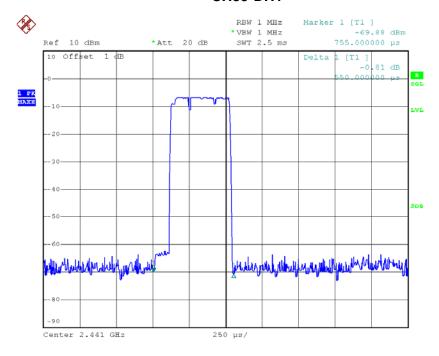


Date: 25.MAY.2014 17:46:01

CH39-DH3

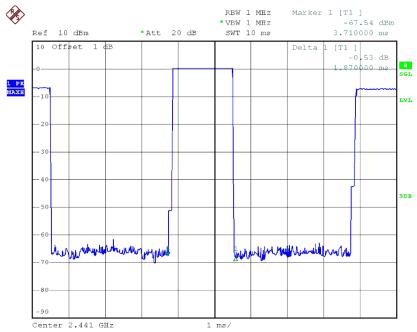


Date: 25.MAY.2014 17:49:19

CH39-DH5

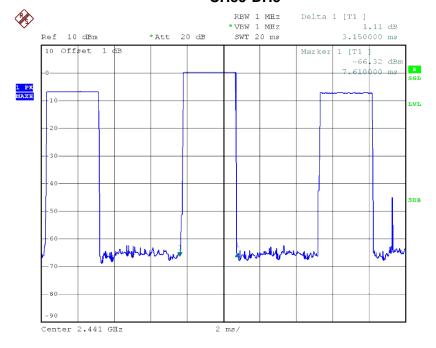


Date: 25.MAY.2014 17:51:40



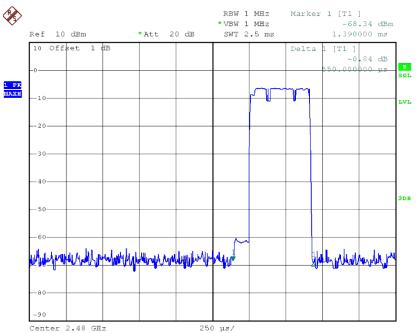


Date: 25.MAY.2014 17:48:09

CH78-DH3

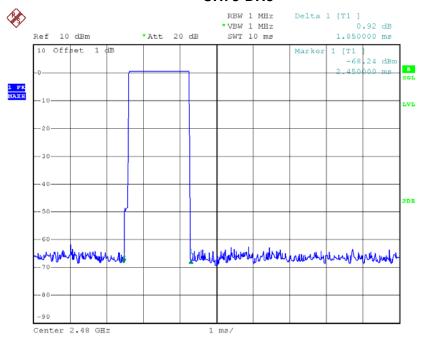

Date: 25.MAY.2014 17:48:59

CH78-DH5

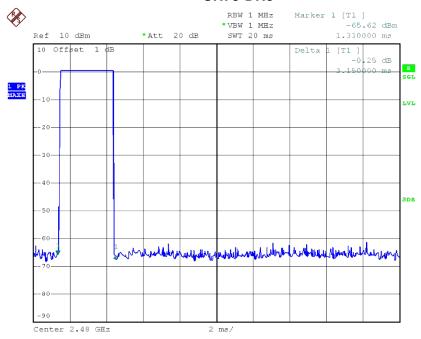

Date: 25.MAY.2014 17:52:07

Report No.: NEI-FICP-1-1405C218 Page 79 of 111


Test Mode: CH00_3Mbps					
Data Packet Frequency Pulse Duration Dwell Time Limits (MHz) (ms) (s) (s)					
DH5	2402	3.1550	0.3365	0.4000	
DH3	2402	1.8750	0.3000	0.4000	
DH1	2402	0.5550	0.1776	0.4000	

Test Mode: CH39_3Mbps				
Data Packet Frequency Pulse Duration Dwell Time Limits (ms) (s) (s)				
DH5	2441	3.1550	0.3365	0.4000
DH3	2441	1.8550	0.2968	0.4000
DH1	2441	0.5700	0.1824	0.4000

Test Mode: CH78_3Mbps					
Data Packet Frequency Pulse Duration Dwell Time Limits (MHz) (ms) (s) (s)					
DH5	2480	3.1550	0.3365	0.4000	
DH3	2480	1.8550	0.2968	0.4000	
DH1	2480	0.5550	0.1776	0.4000	


Report No.: NEI-FICP-1-1405C218 Page 80 of 111

CH00-DH1

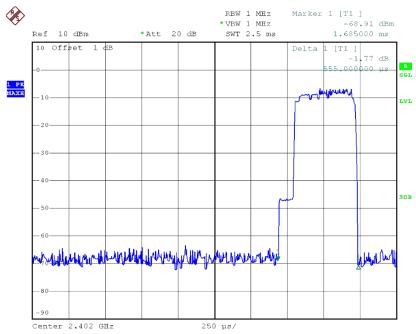


Date: 25.MAY.2014 18:17:43

CH00-DH3

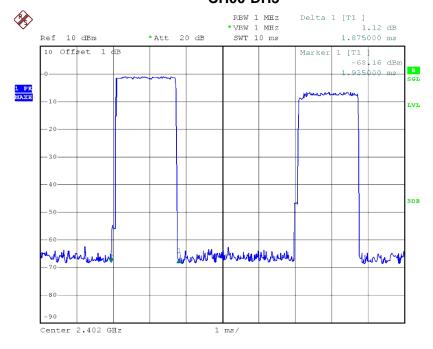


Date: 25.MAY.2014 18:31:22

CH00-DH5

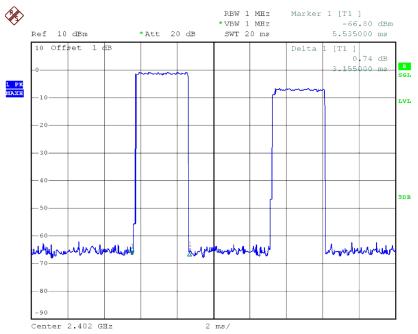


Date: 25.MAY.2014 18:32:08

CH39-DH1

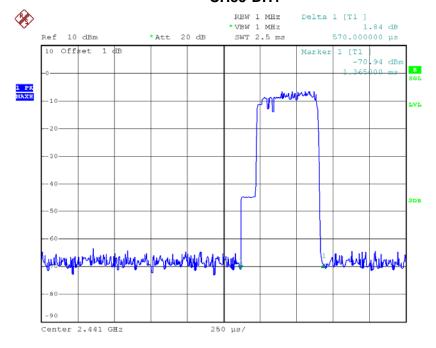


Date: 25.MAY.2014 18:17:24



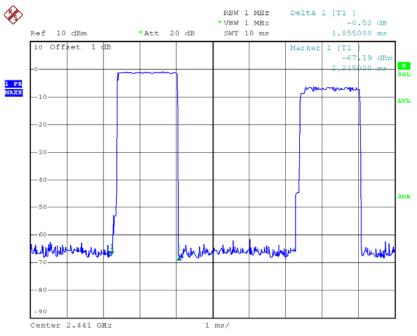


Date: 25.MAY.2014 18:30:40

CH39-DH5

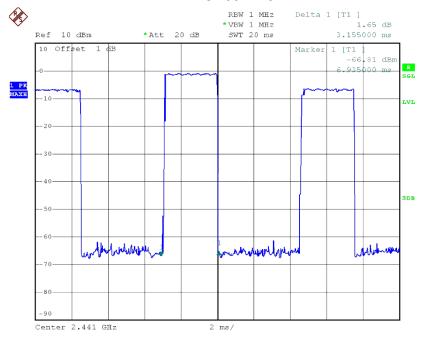


Date: 25.MAY.2014 18:32:25



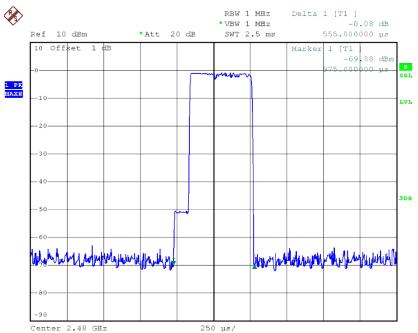


Date: 25.MAY.2014 18:29:29

CH78-DH3

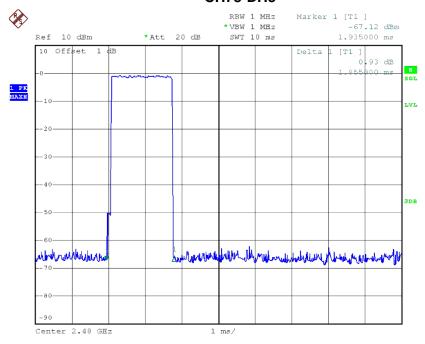

Date: 25.MAY.2014 18:30:18



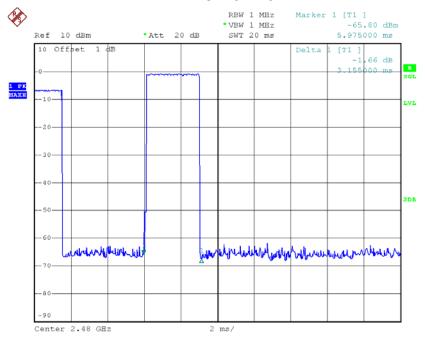

Date: 25.MAY.2014 18:33:16

Report No.: NEI-FICP-1-1405C218 Page 85 of 111


ATTACHMENT G - HOPPING CHANNEL SEPARATION MEASUREMENT

Report No.: NEI-FICP-1-1405C218 Page 86 of 111

Test Mode: Hopping on_1Mbps_CH00/39/78

Frequency (MHz)	Ch. Separation (MHz)	2/3 of the 20 dB bandwidth (MHz)	Result
2402	1.032	0.688	Complies
2441	1.014	0.676	Complies
2480	0.990	0.660	Complies

CH00

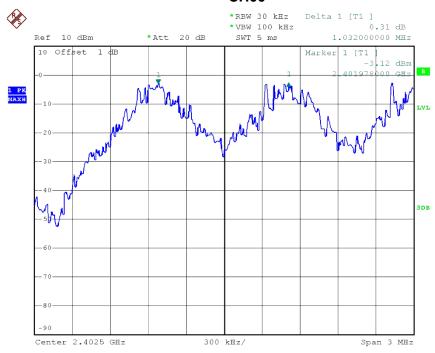

Date: 25.MAY.2014 17:58:11

Report No.: NEI-FICP-1-1405C218 Page 87 of 111

CH39



Date: 25.MAY.2014 17:58:59

CH78




Date: 25.MAY.2014 17:59:59

Test Mode: Hopping on_3Mbps_CH00/39/78


Frequency (MHz)	Ch. Separation (MHz)	2/3 of the 20 dB bandwidth (MHz)	Result
2402	1.002	0.668	Complies
2441	1.026	0.684	Complies
2480	1.020	0.680	Complies

CH00

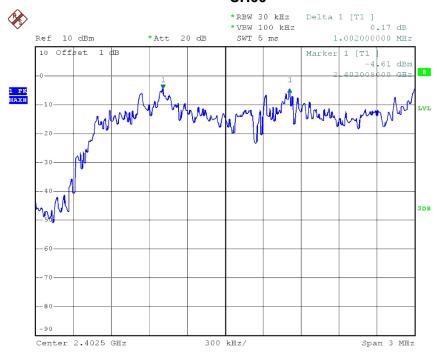


Date: 25.MAY.2014 18:36:53


Report No.: NEI-FICP-1-1405C218 Page 89 of 111

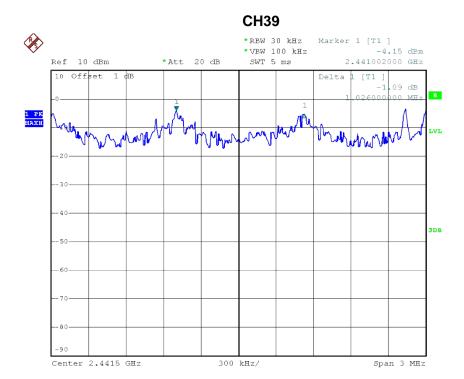

Date: 25.MAY.2014 18:38:19

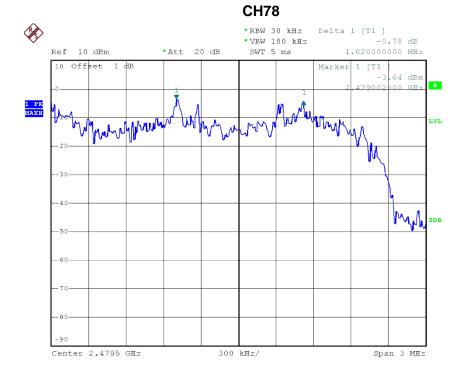

Date: 25.MAY.2014 18:39:12

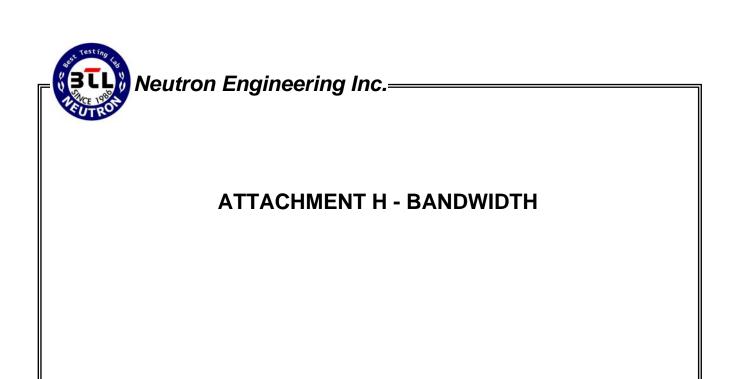


Report No.: NEI-FICP-1-1405C218 Page 91 of 111

Test Mode: 1Mbps_CH00/39/78


Test Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
CH00	2402	1.032	830.00	PASS
CH39	2441	1.014	840.00	PASS
CH78	2480	0.990	830.00	PASS

CH00

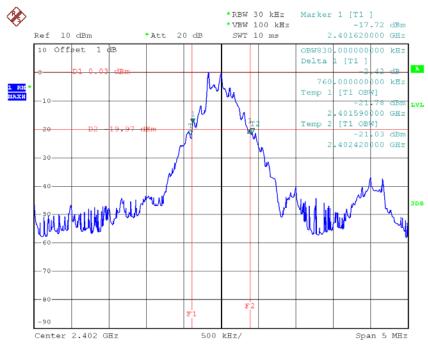


Date: 25.MAY.2014 17:36:52

Report No.: NEI-FICP-1-1405C218 Page 92 of 111

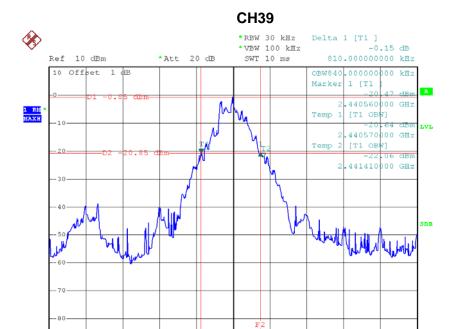

Date: 25.MAY.2014 17:40:42

Center 2.441 GHz

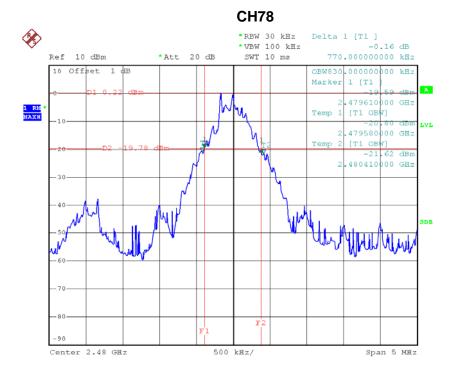


Date: 25.MAY.2014 17:44:19



Test Mode: 3Mbps_CH00/39/78

Test Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
CH00	2402	1.002	1150.00	PASS
CH39	2441	1.026	1160.00	PASS
CH78	2480	1.020	1150.00	PASS


CH00

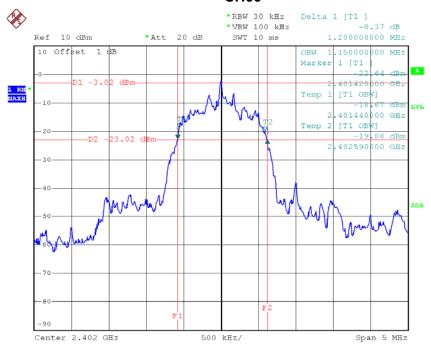


Date: 25.MAY.2014 18:13:44

Report No.: NEI-FICP-1-1405C218 Page 94 of 111




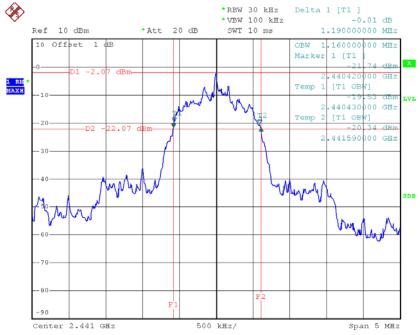

Date: 25.MAY.2014 18:12:57

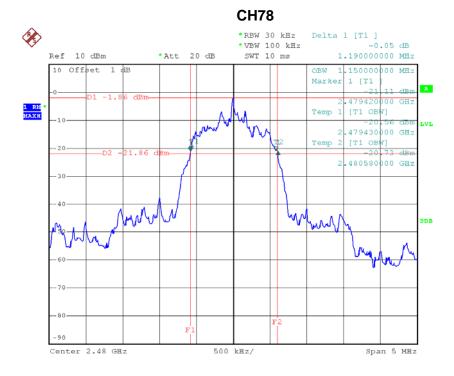

Date: 25.MAY.2014 18:09:01

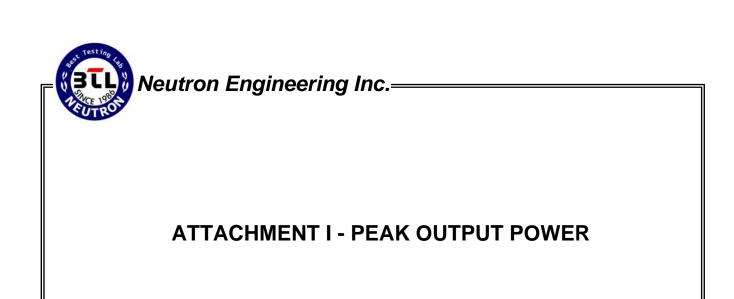

Report No.: NEI-FICP-1-1405C218 Page 96 of 111



Test Mode: 1Mbps_CH00/39/78

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH00	2402	0.20	21	0.125
CH39	2441	0.21	21	0.125
CH78	2480	0.44	21	0.125

CH00




Date: 25.MAY.2014 17:34:07

Report No.: NEI-FICP-1-1405C218 Page 97 of 111



Date: 25.MAY.2014 17:43:13

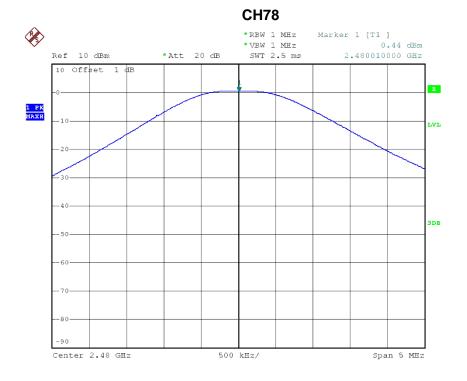


Date: 25.MAY.2014 17:42:55



Test Mode: 3Mbps_CH00/39/78


Test Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH00	2402	-0.35	21	0.125
CH39	2441	-0.45	21	0.125
CH78	2480	-0.37	21	0.125

CH00

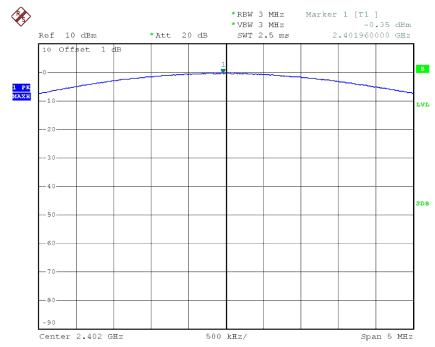

Date: 25.MAY.2014 18:15:48

Report No.: NEI-FICP-1-1405C218 Page 99 of 111

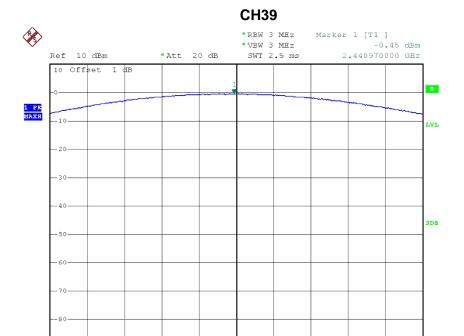


500 kHz/

Span 5 MHz

Date: 25.MAY.2014 18:16:02

Center 2.441 GHz

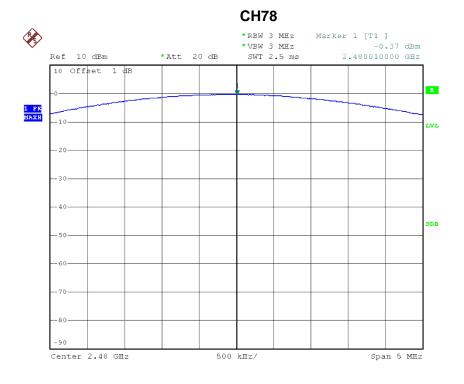


Date: 25.MAY.2014 18:08:26

ATTACHMENT J - ANTENNA CONDUCTED SPURIOUS EMISSION


Report No.: NEI-FICP-1-1405C218 Page 101 of 111



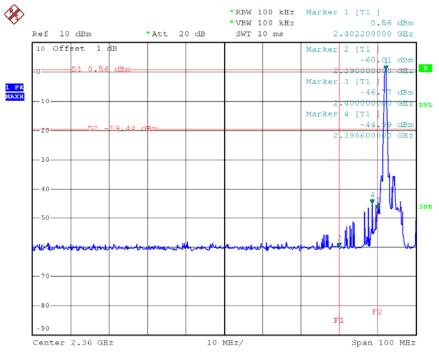


Date: 25.MAY.2014 17:37:58

CH78 (Upper) _1Mbps

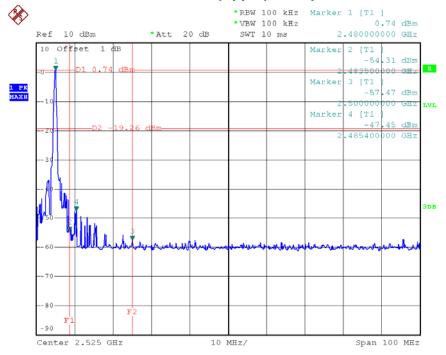


Date: 25.MAY.2014 17:42:03

Hopping on mode (Lower) _1Mbps

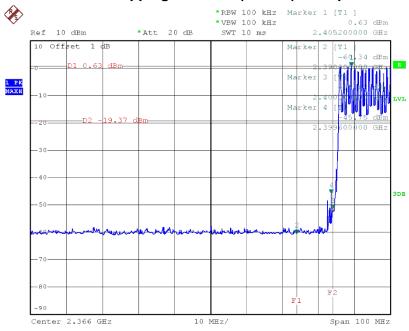


Date: 25.MAY.2014 17:55:37

Hopping on mode (Upper) _1Mbps

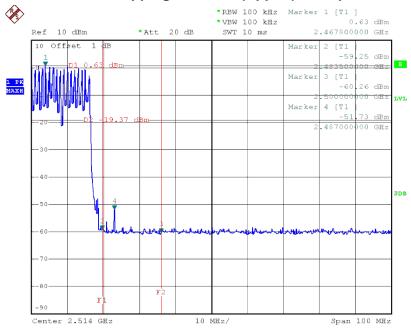


Date: 25.MAY.2014 17:56:58

CH00 (30MHz~1GHz) _1Mbps

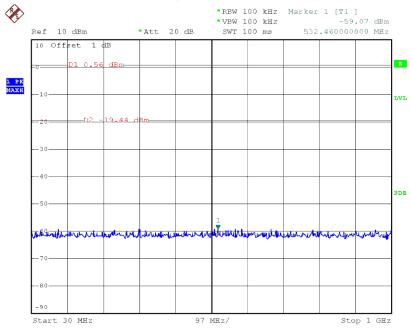


Date: 25.MAY.2014 17:38:14

CH00 (1GHz~10th Harmonic) _1Mbps

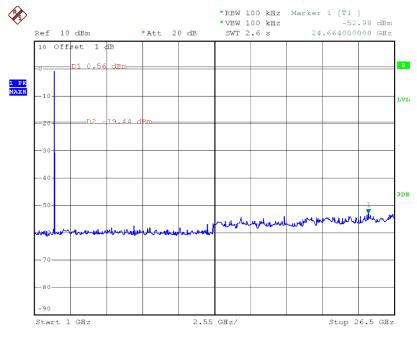


Date: 25.MAY.2014 17:38:35

CH39 (30MHz~1GHz) _1Mbps

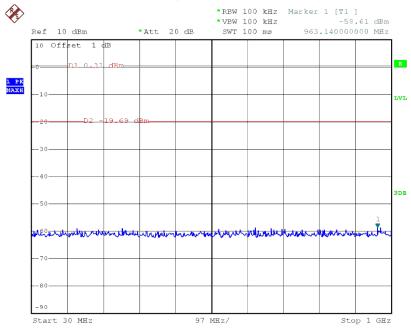


Date: 25.MAY.2014 17:39:21

CH39 (1GHz~10th Harmonic) _1Mbps

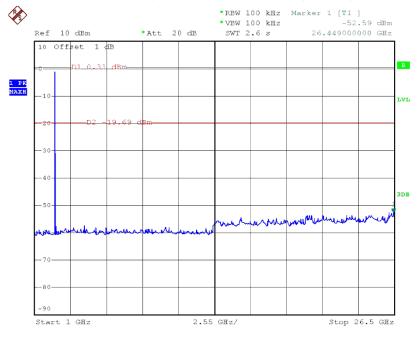


Date: 25.MAY.2014 17:39:50

CH78 (30MHz~1GHz) _1Mbps

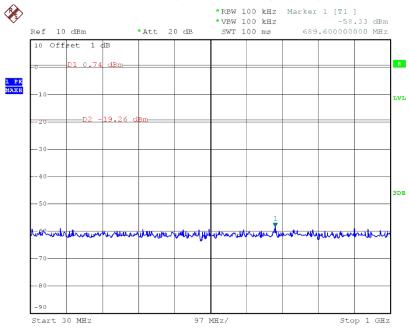


Date: 25.MAY.2014 17:42:22

CH78 (1GHz~10th Harmonic) _1Mbps

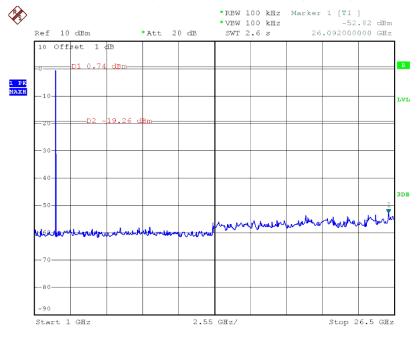


Date: 25.MAY.2014 17:42:36



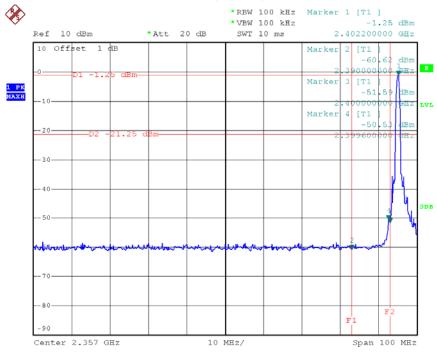


Date: 25.MAY.2014 18:14:44

CH78 (Upper) _3Mbps

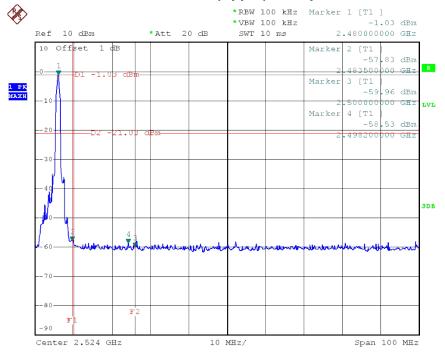


Date: 25.MAY.2014 18:10:06

Hopping on mode (Lower) _3Mbps

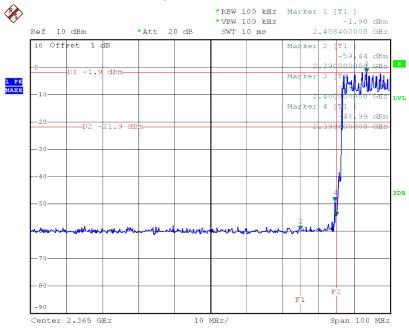


Date: 25.MAY.2014 18:44:36

Hopping on mode (Upper) _3Mbps

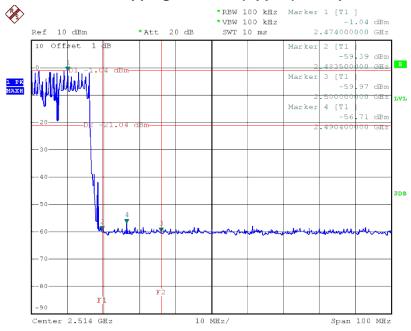


Date: 25.MAY.2014 18:45:48

CH00 (30MHz~1GHz) _3Mbps

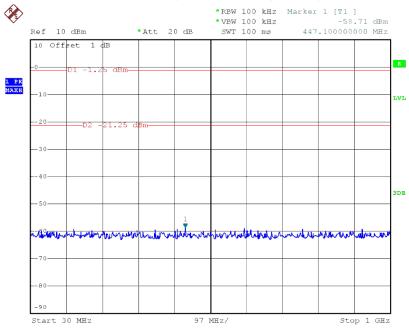


Date: 25.MAY.2014 18:14:57

CH00 (1GHz~10th Harmonic) _3Mbps

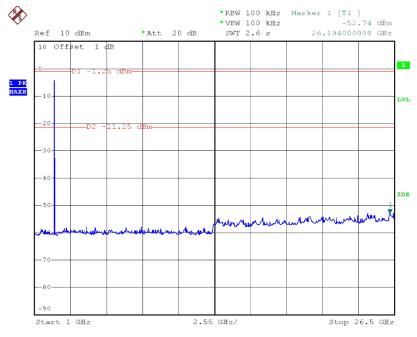


Date: 25.MAY.2014 18:15:25

CH39 (30MHz~1GHz) _3Mbps

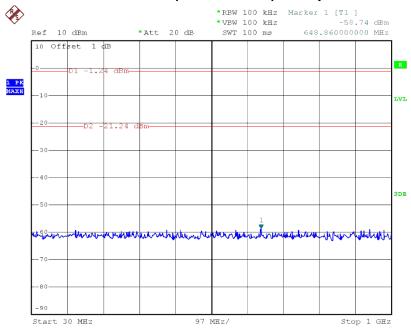


Date: 25.MAY.2014 18:11:42

CH39 (1GHz~10th Harmonic) _3Mbps

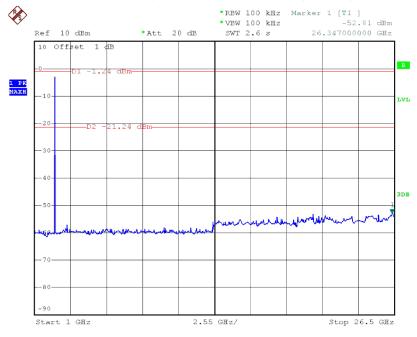


Date: 25.MAY.2014 18:12:12

CH78 (30MHz~1GHz) _3Mbps

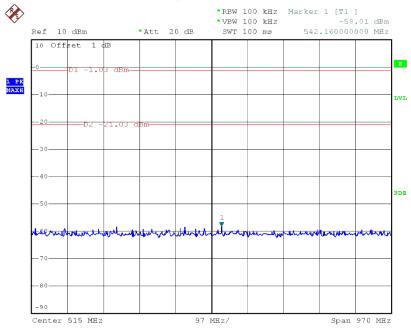

Date: 25.MAY.2014 18:10:22

CH78 (1GHz~10th Harmonic) _3Mbps

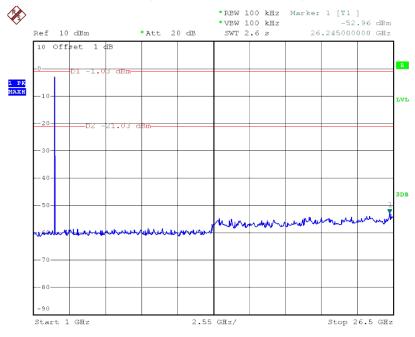

Date: 25.MAY.2014 18:10:42