



## FCC Report

**Applicant:** Radiolink Electronic Limited

**Address of Applicant:** 3/F,BLD2,FuGuo industrial park,KaiFeng North Road, MeiLin, Shenzhen, China

**Manufacturer/Factory:** Radiolink Electronic Limited

**Address of Manufacturer/Factory:** 3/F,BLD2,FuGuo industrial park,KaiFeng North Road, MeiLin, Shenzhen, China

### Equipment Under Test (EUT)

**Product Name:** Pistol grip transmitter

**Model No.:** RC6GS, THT6

**FCC ID:** U2BRL039RC6GS

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247:2017

**Date of sample receipt:** January 02, 2018

**Date of Test:** January 03-08, 2018

**Date of report issued:** January 09, 2018

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Lo  
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	January 09, 2018	Original

Prepared By:


Bill. Yuan

Date:

January 09, 2018

Project Engineer

Check By:

Andy. Wu

Date:

January 09, 2018

Reviewer

### 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 TEST FACILITY .....	7
5.4 TEST LOCATION .....	7
5.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	7
5.6 DESCRIPTION OF SUPPORT UNITS .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA .....	9
7.1 ANTENNA REQUIREMENT .....	9
7.2 CONDUCTED PEAK OUTPUT POWER .....	10
7.3 20DB EMISSION BANDWIDTH .....	12
7.4 CARRIER FREQUENCIES SEPARATION .....	14
7.5 HOPPING CHANNEL NUMBER .....	16
7.6 DWELL TIME .....	17
7.7 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....	21
7.8 BAND EDGE .....	22
7.8.1 Conducted Emission Method .....	22
7.8.2 Radiated Emission Method .....	24
7.9 SPURIOUS EMISSION .....	26
7.9.1 Conducted Emission Method .....	26
7.9.2 Radiated Emission Method .....	28
8 TEST SETUP PHOTO .....	35
9 EUT CONSTRUCTIONAL DETAILS .....	36

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	N/A
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(a)(1)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013

Pass: The EUT complies with the essential requirements in the standard.

## Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	Pistol grip transmitter
Model No.:	RC6GS, THT6
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The difference is the model name, sticker and spray painting.</i>	
Operation Frequency:	2408MHz~2477.6MHz
Channel numbers:	59
Channel separation:	1.2MHz
Modulation type:	GFSK
Antenna Type:	Integral antenna
Antenna gain:	2.0dBi(declared by Applicant)
Power supply:	4.8~15.0V DC, 4*AA or 2S-4S Lithium battery for Transmitter 4.8~10.0V DC, 4*AA or 2S-4S Lithium battery for Receiver

Operation Frequency each of channel					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2408.0MHz	21	2432.0MHz	41	2456.0MHz
2	2409.2MHz	22	2433.2MHz	42	2457.2MHz
3	2410.4MHz	23	2434.4MHz	43	2458.4MHz
4	2411.6MHz	24	2435.6MHz	44	2459.6MHz
5	2412.8MHz	25	2436.8MHz	45	2460.8MHz
6	2414.0MHz	26	2438.0MHz	46	2462.0MHz
7	2415.2MHz	27	2439.2MHz	47	2463.2MHz
8	2416.4MHz	28	2440.4MHz	48	2464.4MHz
9	2417.6MHz	29	2441.6MHz	49	2465.6MHz
10	2418.8MHz	30	2442.8MHz	50	2466.8MHz
11	2420.0MHz	31	2444.0MHz	51	2468.0MHz
12	2421.2MHz	32	2445.2MHz	52	2469.2MHz
13	2422.4MHz	33	2446.4MHz	53	2470.4MHz
14	2423.6MHz	34	2447.6MHz	54	2471.6MHz
15	2424.8MHz	35	2448.8MHz	55	2472.8MHz
16	2426.0MHz	36	2450.0MHz	56	2474.0MHz
17	2427.2MHz	37	2451.2MHz	57	2475.2MHz
18	2428.4MHz	38	2452.4MHz	58	2476.4MHz
19	2429.6MHz	39	2453.6MHz	59	2477.6MHz
20	2430.8MHz	40	2454.8MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2408.0MHz
The middle channel	2441.6MHz
The Highest channel	2477.6MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
-------------------	------------------------------------

## 5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

## 5.4 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

## 5.5 Other Information Requested by the Customer

None.
-------

## 5.6 Description of Support Units

None.
-------


## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

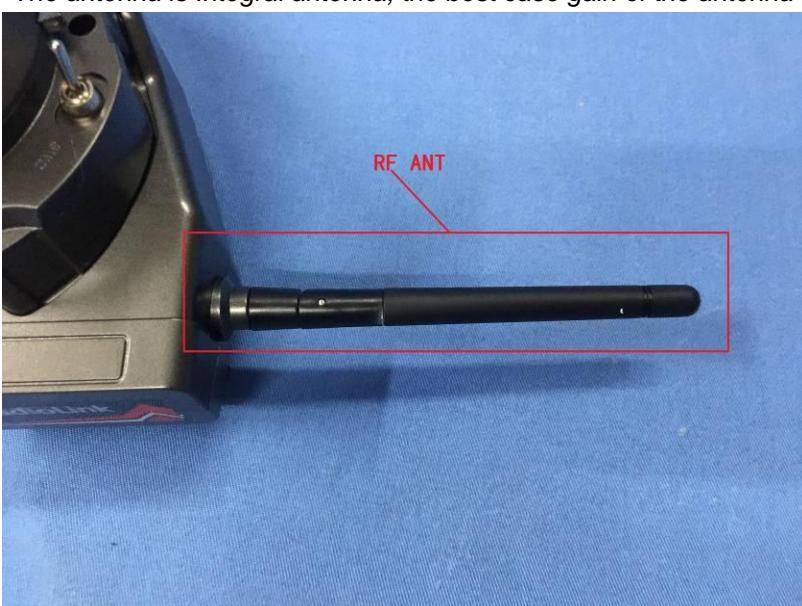Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<p><b>E.U.T Antenna:</b></p> <p><i>The antenna is Integral antenna, the best case gain of the antenna is 2.0dBi</i></p> 	


## 7.2 Conducted Peak Output Power

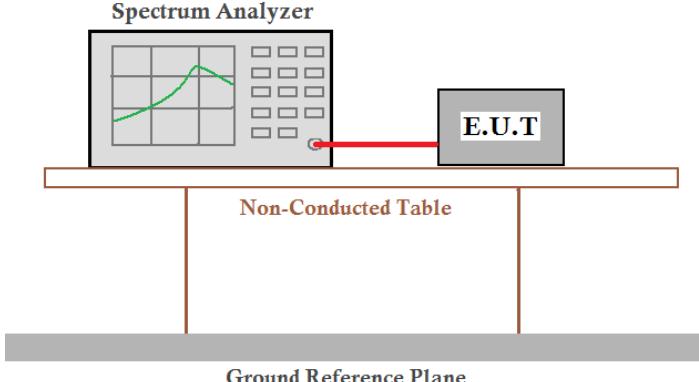Test Requirement:	FCC Part15 C Section 15.247 (b)(1)		
Test Method:	ANSI C63.10:2013		
Limit:	20.97dBm		
Test setup:			
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		


### Measurement Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	7.48	20.97	Pass
	Middle	7.42		
	Highest	7.64		

**Test plot as follows:**

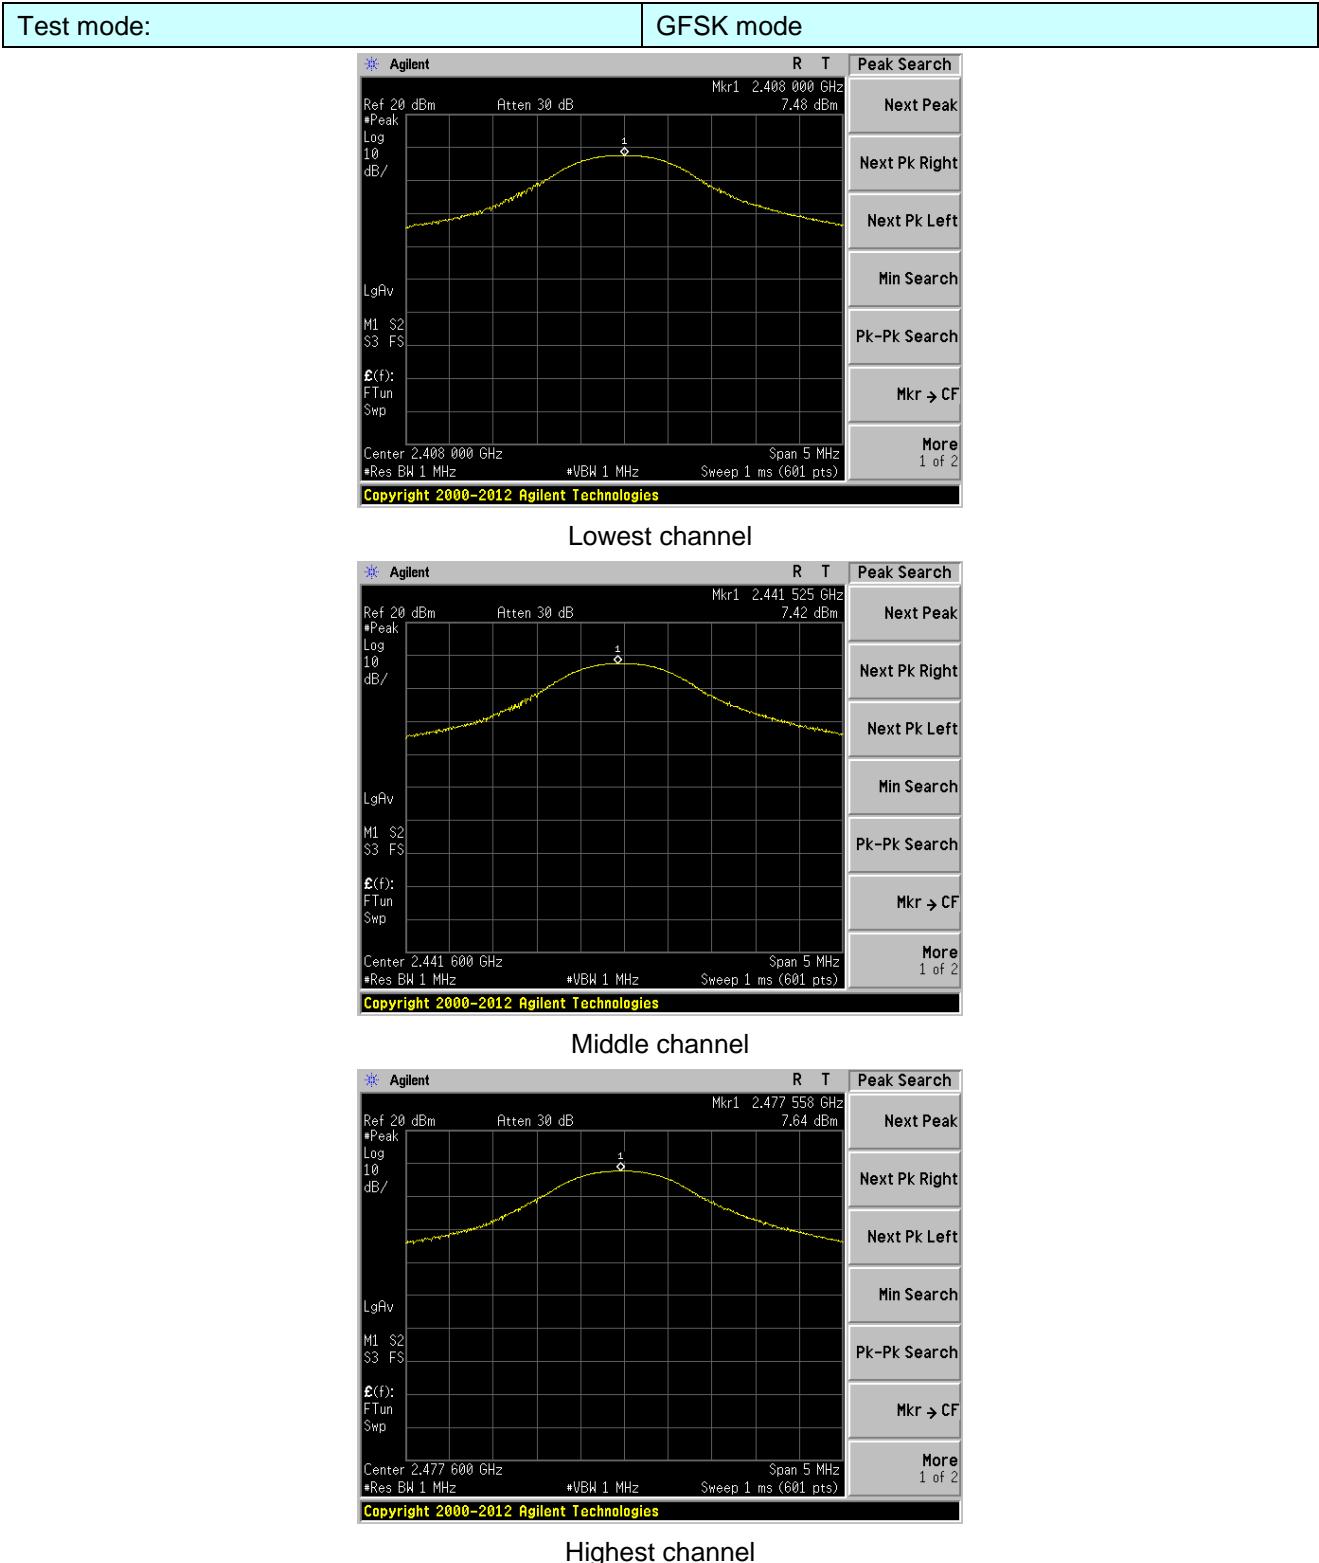


### 7.3 20dB Emission Bandwidth

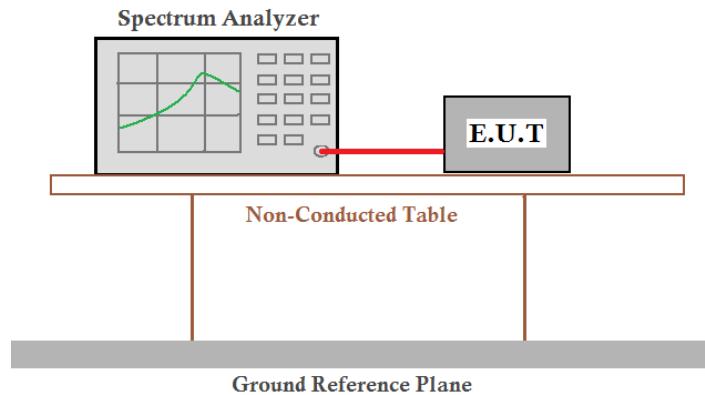Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	DA 00-705,ANSI C63.10:2013
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


#### Measurement Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.194	Pass
	Middle	0.170	
	Highest	0.171	

**Test plot as follows:**

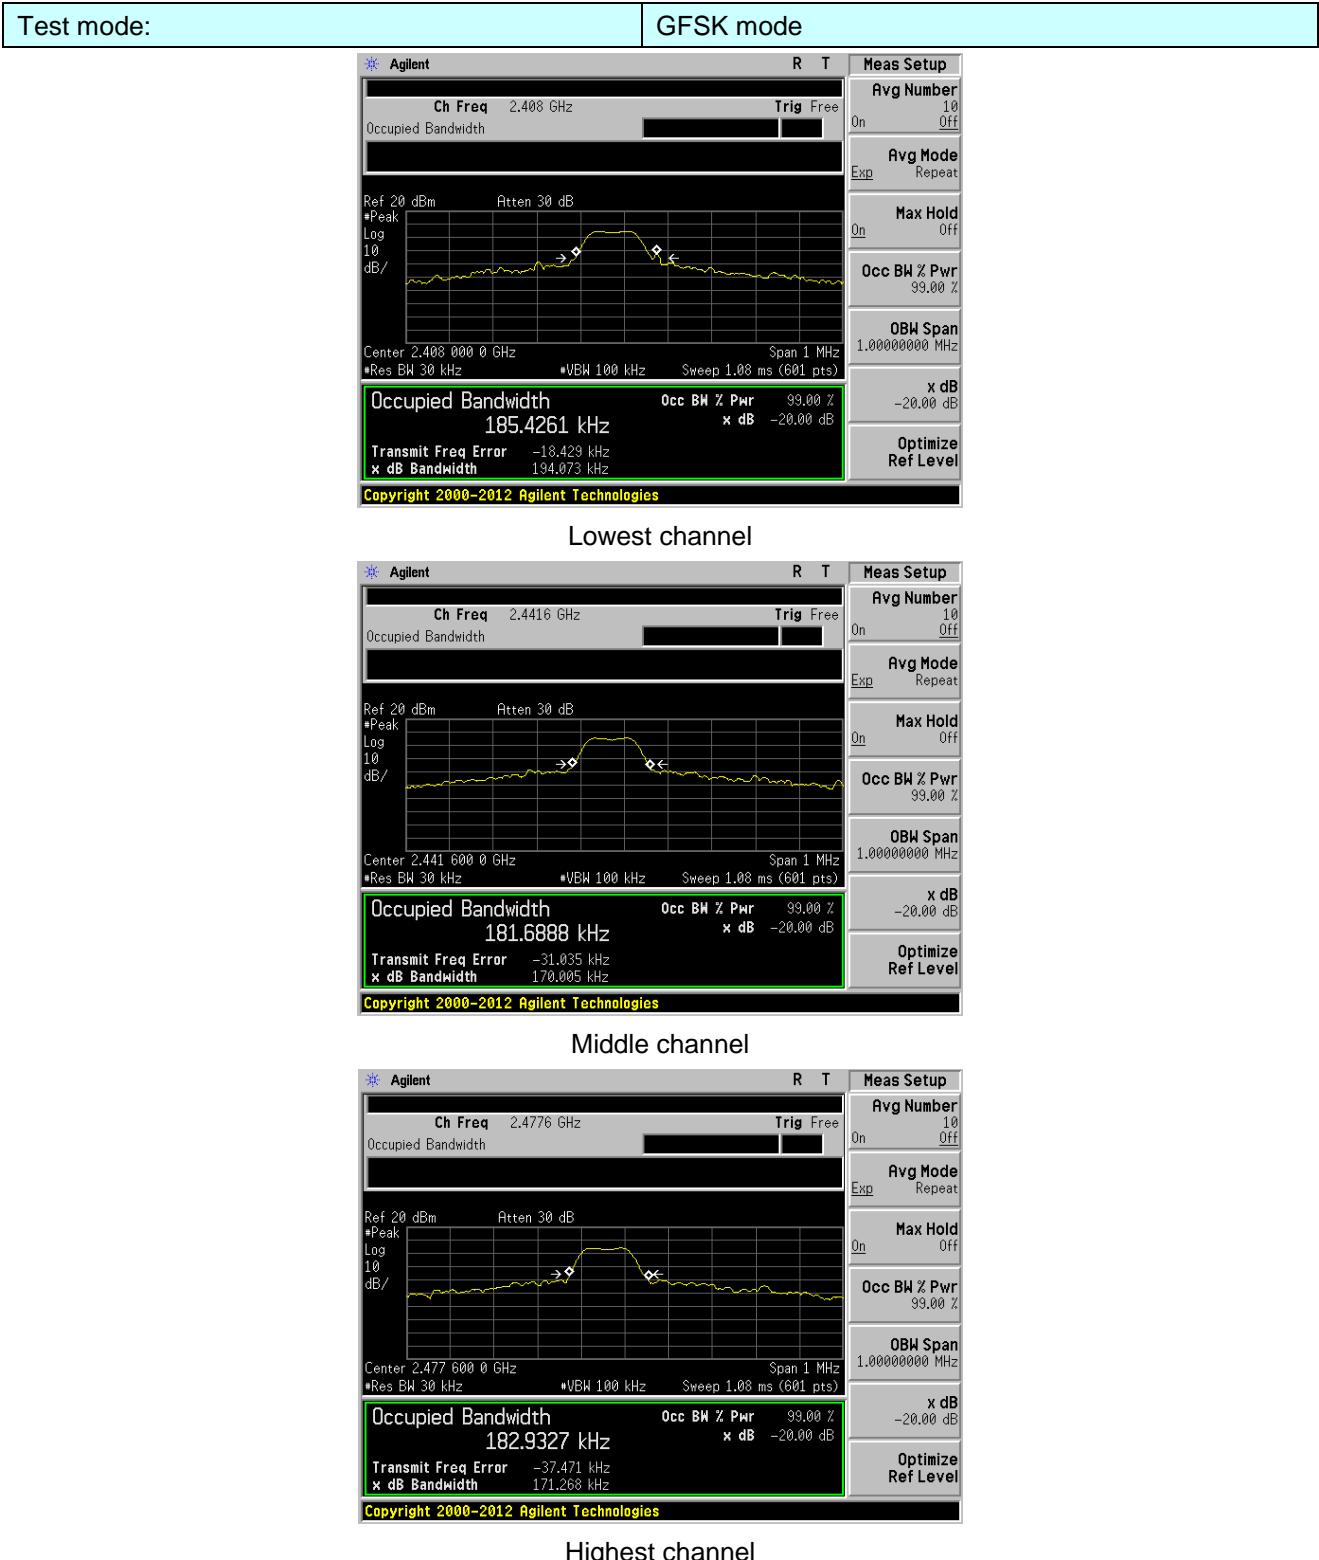

## 7.4 Carrier Frequencies Separation

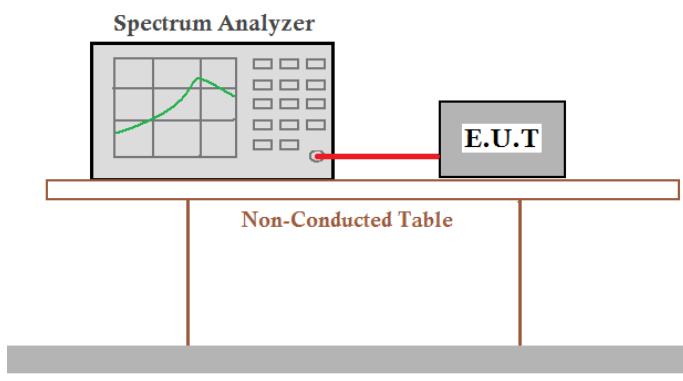Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	DA 00-705, ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK	Lowest	1200	129	Pass
	Middle	1205	129	Pass
	Highest	1200	129	Pass


Note: According to section 7.3

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	194.073	129

**Test plot as follows:**

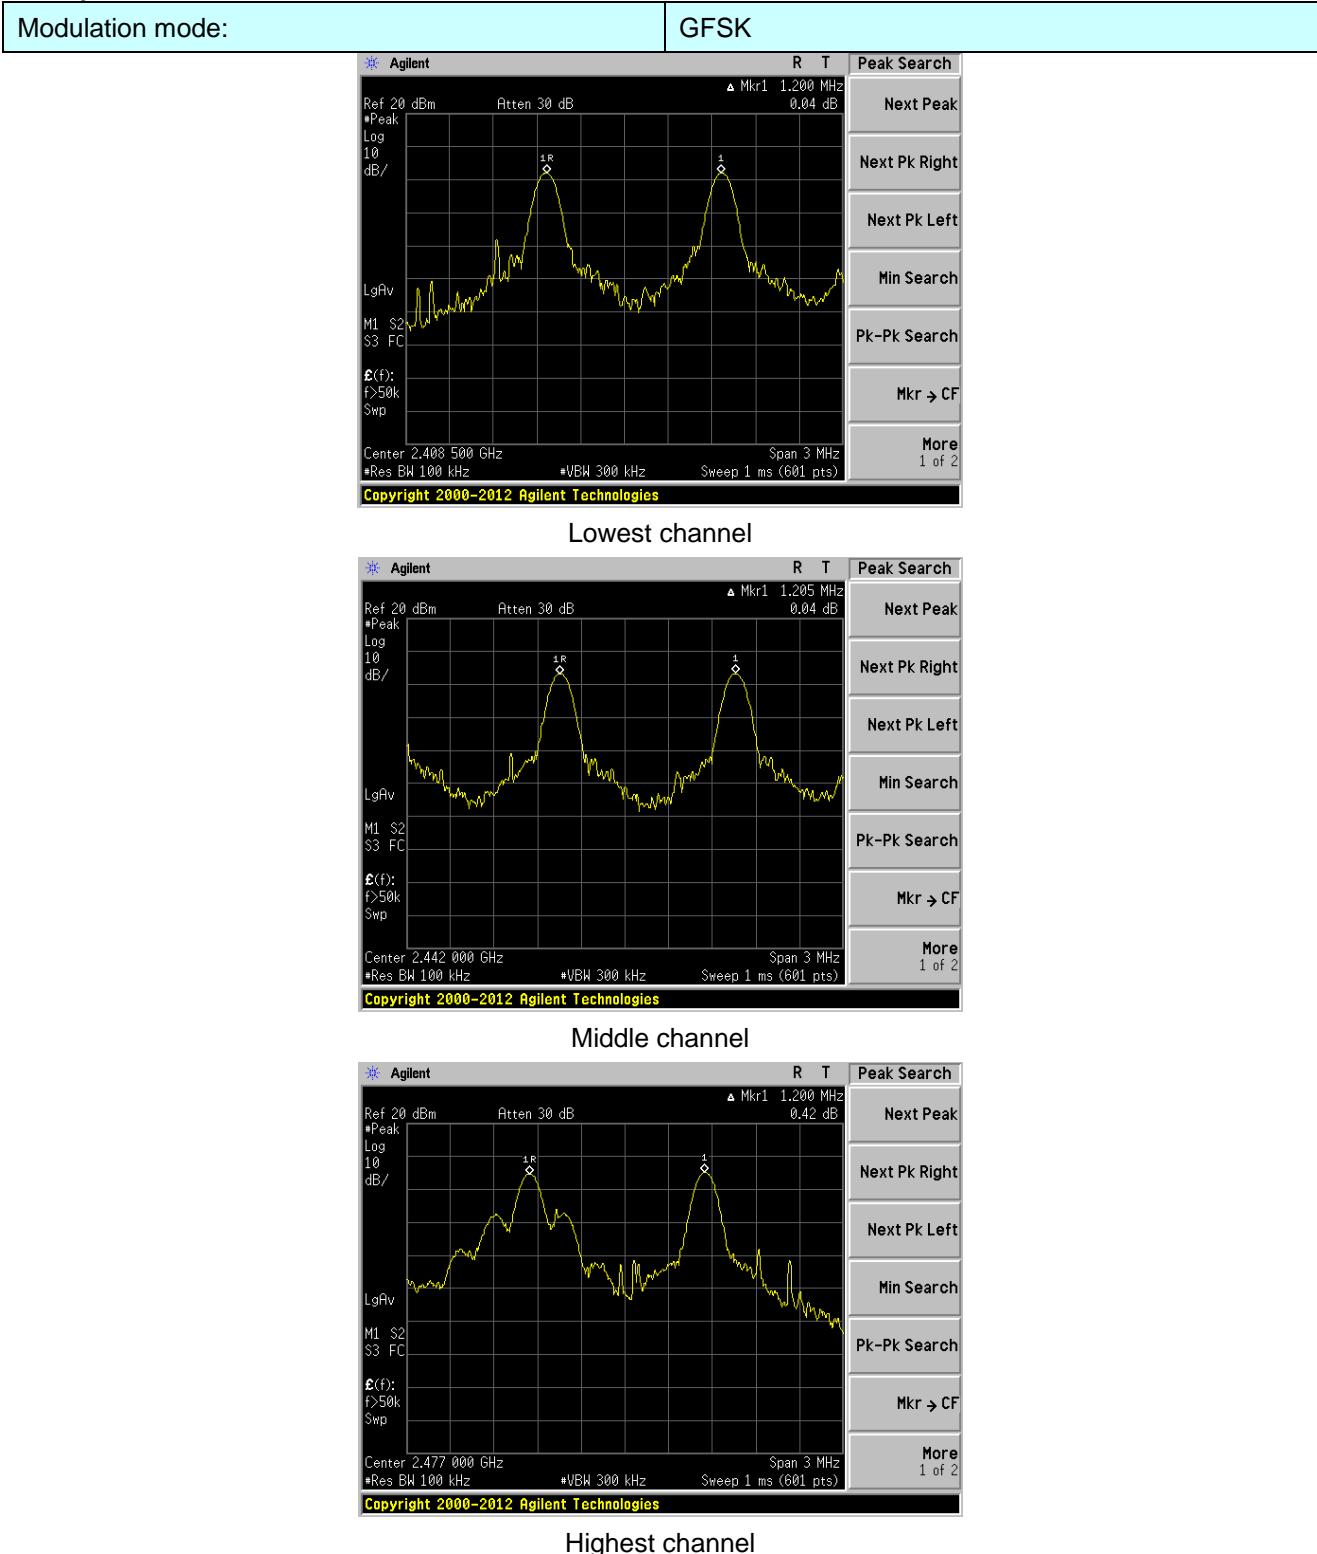


## 7.5 Hopping Channel Number

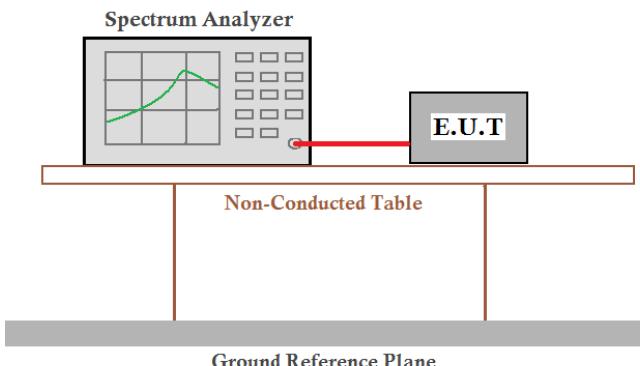
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	DA 00-705, ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	59	15	Pass

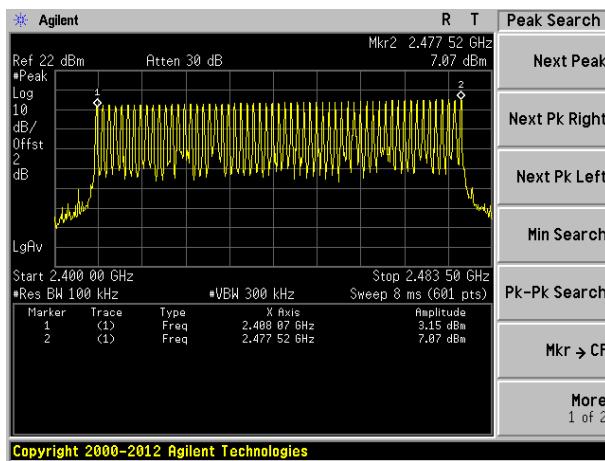

## 7.6 Dwell Time

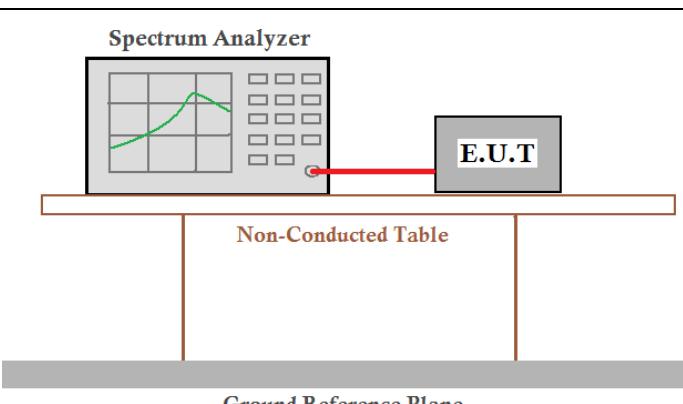Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Frequency	Ton (ms)	Dwell time(ms)	Limit(ms)	Result
2408.0MHz	9.3	219.48	400	Pass
2441.6MHz	9.3	219.48	400	Pass
2477.6MHz	9.3	219.48	400	Pass


The formula as below:

2408.0MHz: Dwell time = Ton \* Ton times in 1s \* 0.4s \* channel numbers=9.3ms\*1\*0.4\*59=219.48ms


2441.6MHz: Dwell time = Ton \* Ton times in 1s \* 0.4s \* channel numbers=9.3ms\*1\*0.4\*59=219.48ms

2477.6MHz: Dwell time = Ton \* Ton times in 1s \* 0.4s \* channel numbers=9.3ms\*1\*0.4\*59=219.48ms


**Test plot as follows:**

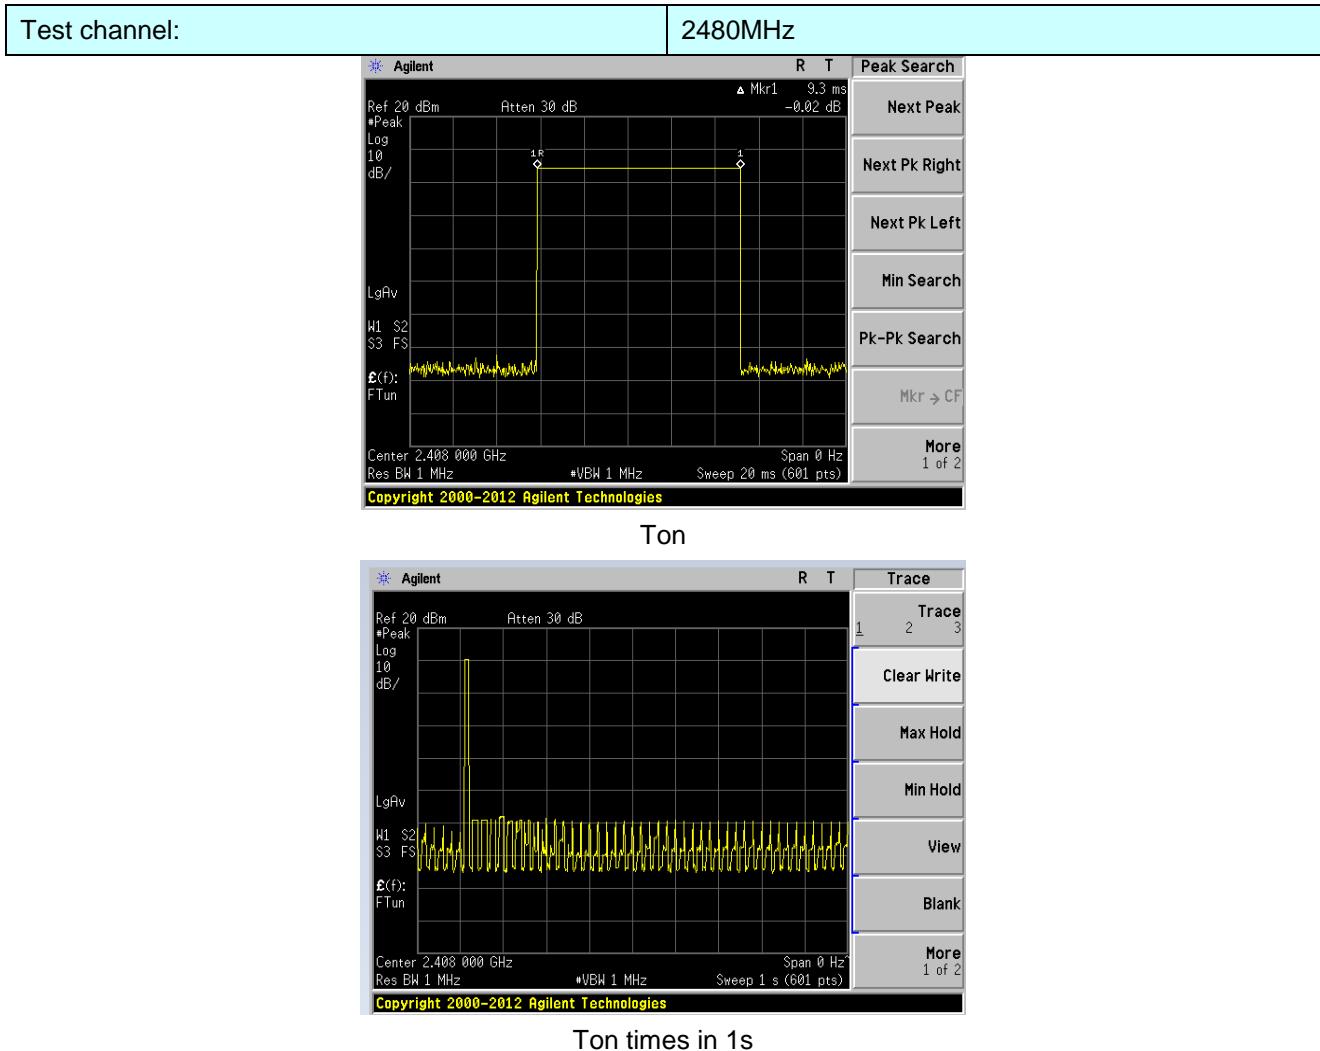

Test channel:	2441.6MHz
---------------	-----------

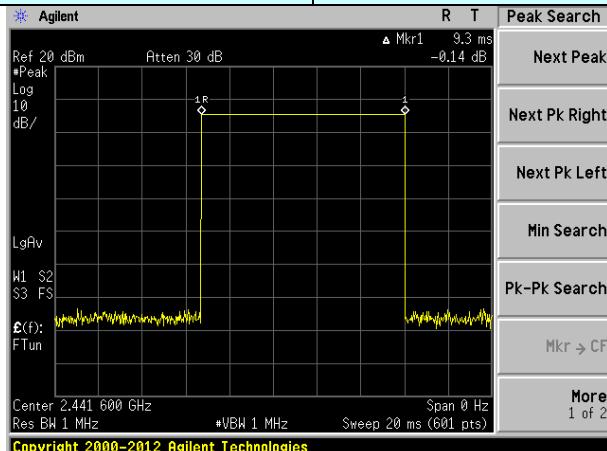


Ton

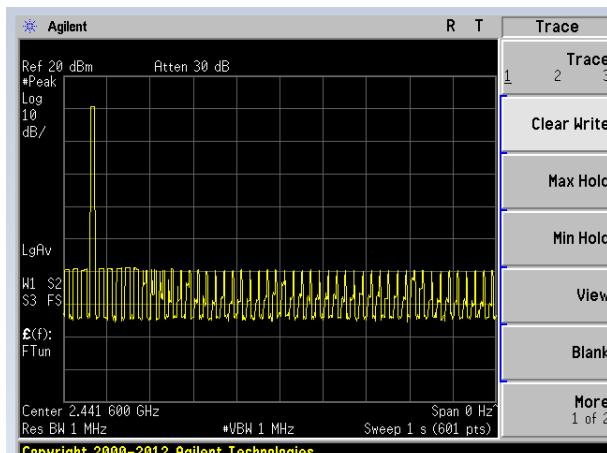


Ton times in 1s

Test channel:

2477.6MHz

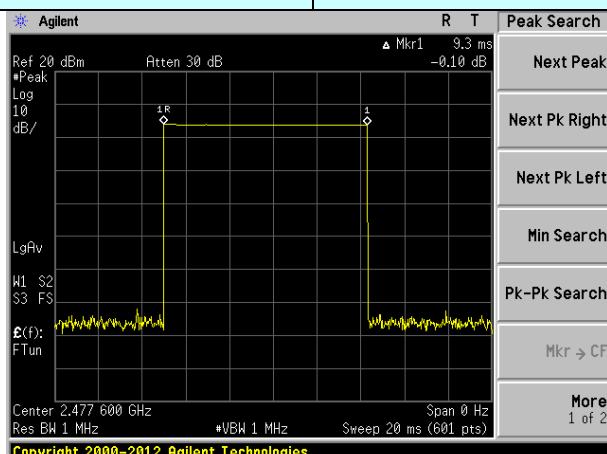


Ton

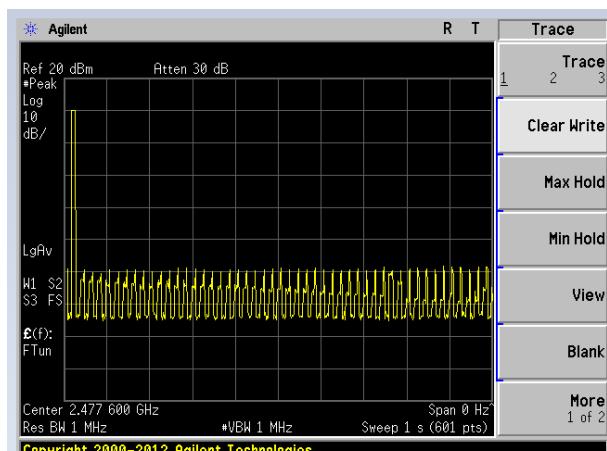


Ton times in 1s

## 7.7 Pseudorandom Frequency Hopping Sequence

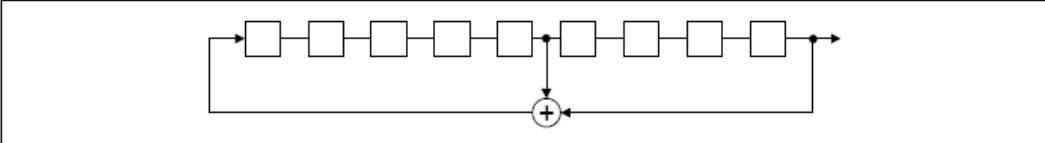
Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>
<b>EUT Pseudorandom Frequency Hopping Sequence</b>	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"><li>• Number of shift register stages: 9</li><li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li><li>• Longest sequence of zeros: 8 (non-inverted signal)</li></ul>  <p>Linear Feedback Shift Register for Generation of the PRBS sequence</p> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	

## 7.8 Band Edge

### 7.8.1 Conducted Emission Method

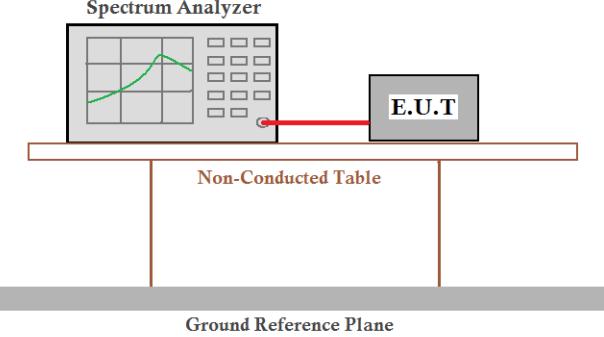
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	DA 00-705,ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Test plot as follows:**

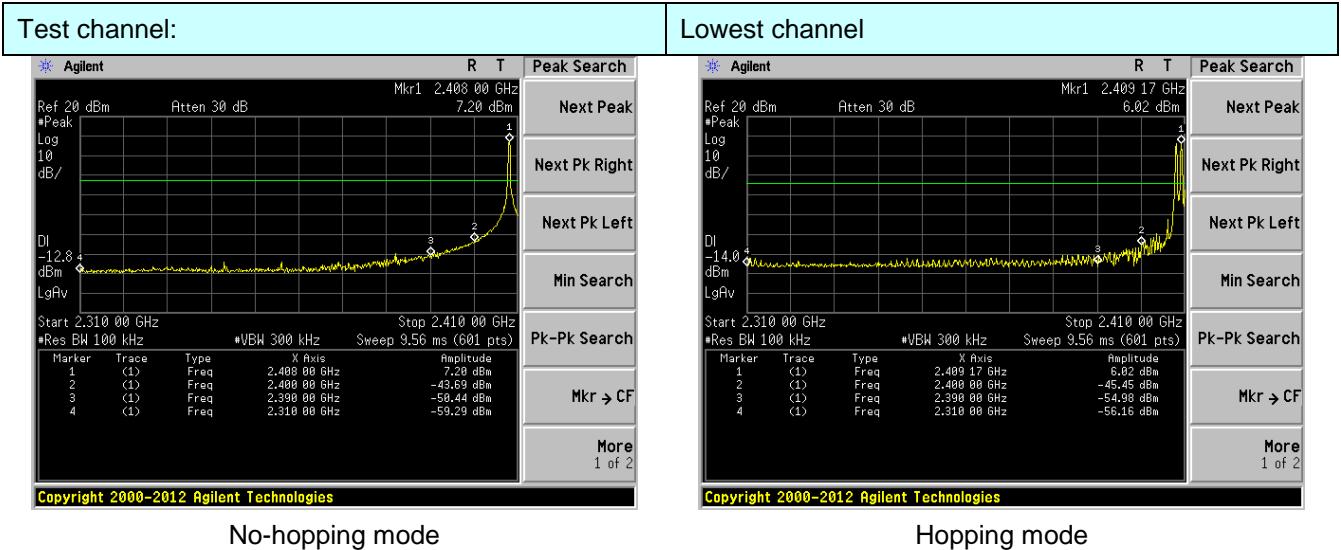**GFSK Mode:**


No-hopping mode


Hopping mode

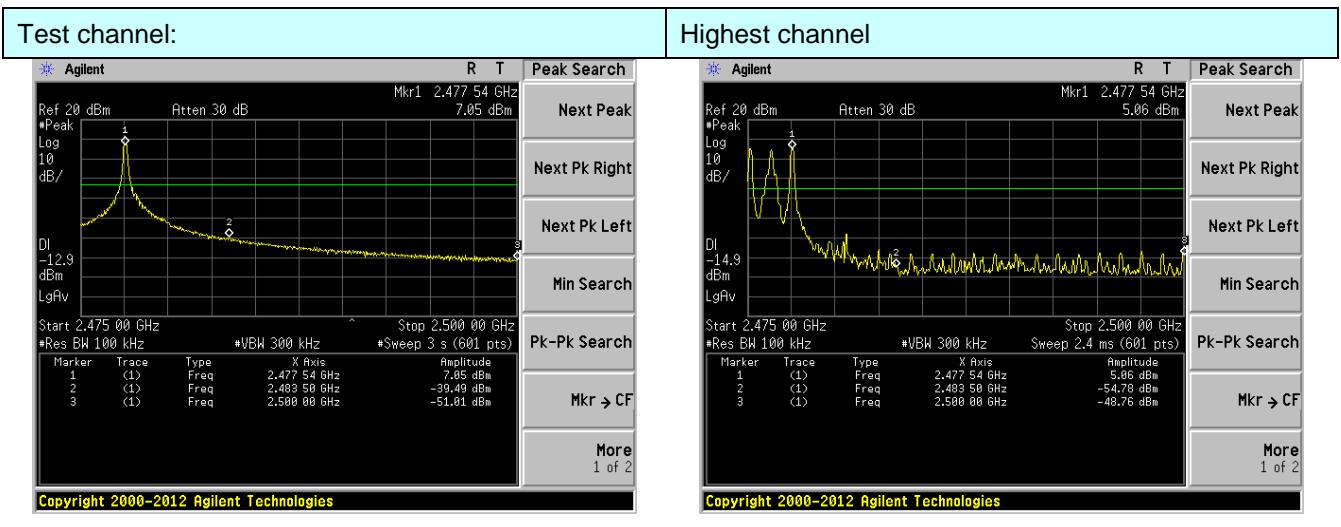

No-hopping mode

Hopping mode

## 7.8.2 Radiated Emission Method

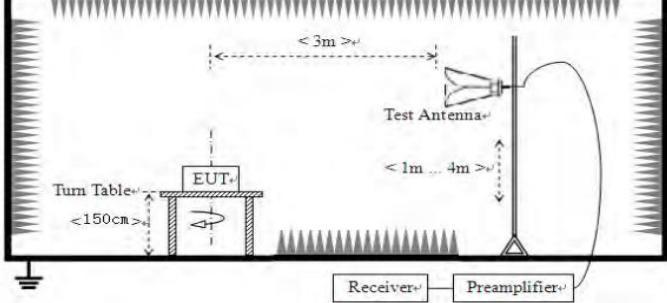Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	All restriction band have been tested, and 2.3GHz to 2.5GHz band is the worse case								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
	Above 1GHz	54.00		Average Value					
		74.00		Peak Value					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>								
Test Instruments:	Refer to section 6.0 for details								
Test mode:	Refer to section 5.2 for details								
Test results:	Pass								

Test channel:	Lowest							
---------------	--------	--	--	--	--	--	--	--

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	63.72	27.59	5.38	30.18	66.51	74.00	-7.49	Vertical
2400.00	63.81	27.58	5.39	30.18	66.60	74.00	-7.40	Vertical
2390.00	62.97	27.59	5.38	30.18	65.76	74.00	-8.24	Horizontal
2400.00	63.79	27.58	5.39	30.18	66.58	74.00	-7.42	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	44.75	27.59	5.38	30.18	47.54	54.00	-6.46	Vertical
2400.00	45.81	27.58	5.39	30.18	48.60	54.00	-5.40	Vertical
2390.00	44.54	27.59	5.38	30.18	47.33	54.00	-6.67	Horizontal
2400.00	46.99	27.58	5.39	30.18	49.78	54.00	-4.22	Horizontal

Test channel:	Highest							
---------------	---------	--	--	--	--	--	--	--

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	63.16	27.53	5.47	29.93	66.23	74.00	-7.77	Vertical
2500.00	60.05	27.55	5.49	29.93	63.16	74.00	-10.84	Vertical
2483.50	59.76	27.53	5.47	29.93	62.83	74.00	-11.17	Horizontal
2500.00	58.57	27.55	5.49	29.93	61.68	74.00	-12.32	Horizontal

**Average value:**


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	45.08	27.53	5.47	29.93	48.15	54.00	-5.85	Vertical
2500.00	43.12	27.55	5.49	29.93	46.23	54.00	-7.77	Vertical
2483.50	45.68	27.53	5.47	29.93	48.75	54.00	-5.25	Horizontal
2500.00	41.08	27.55	5.49	29.93	44.19	54.00	-9.81	Horizontal


**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.9 Spurious Emission

### 7.9.1 Conducted Emission Method

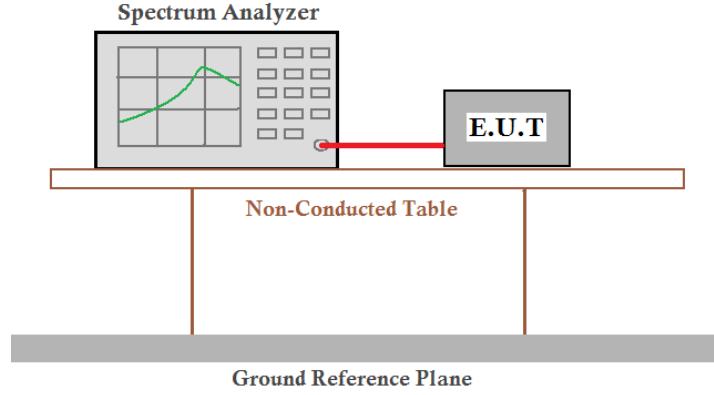Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

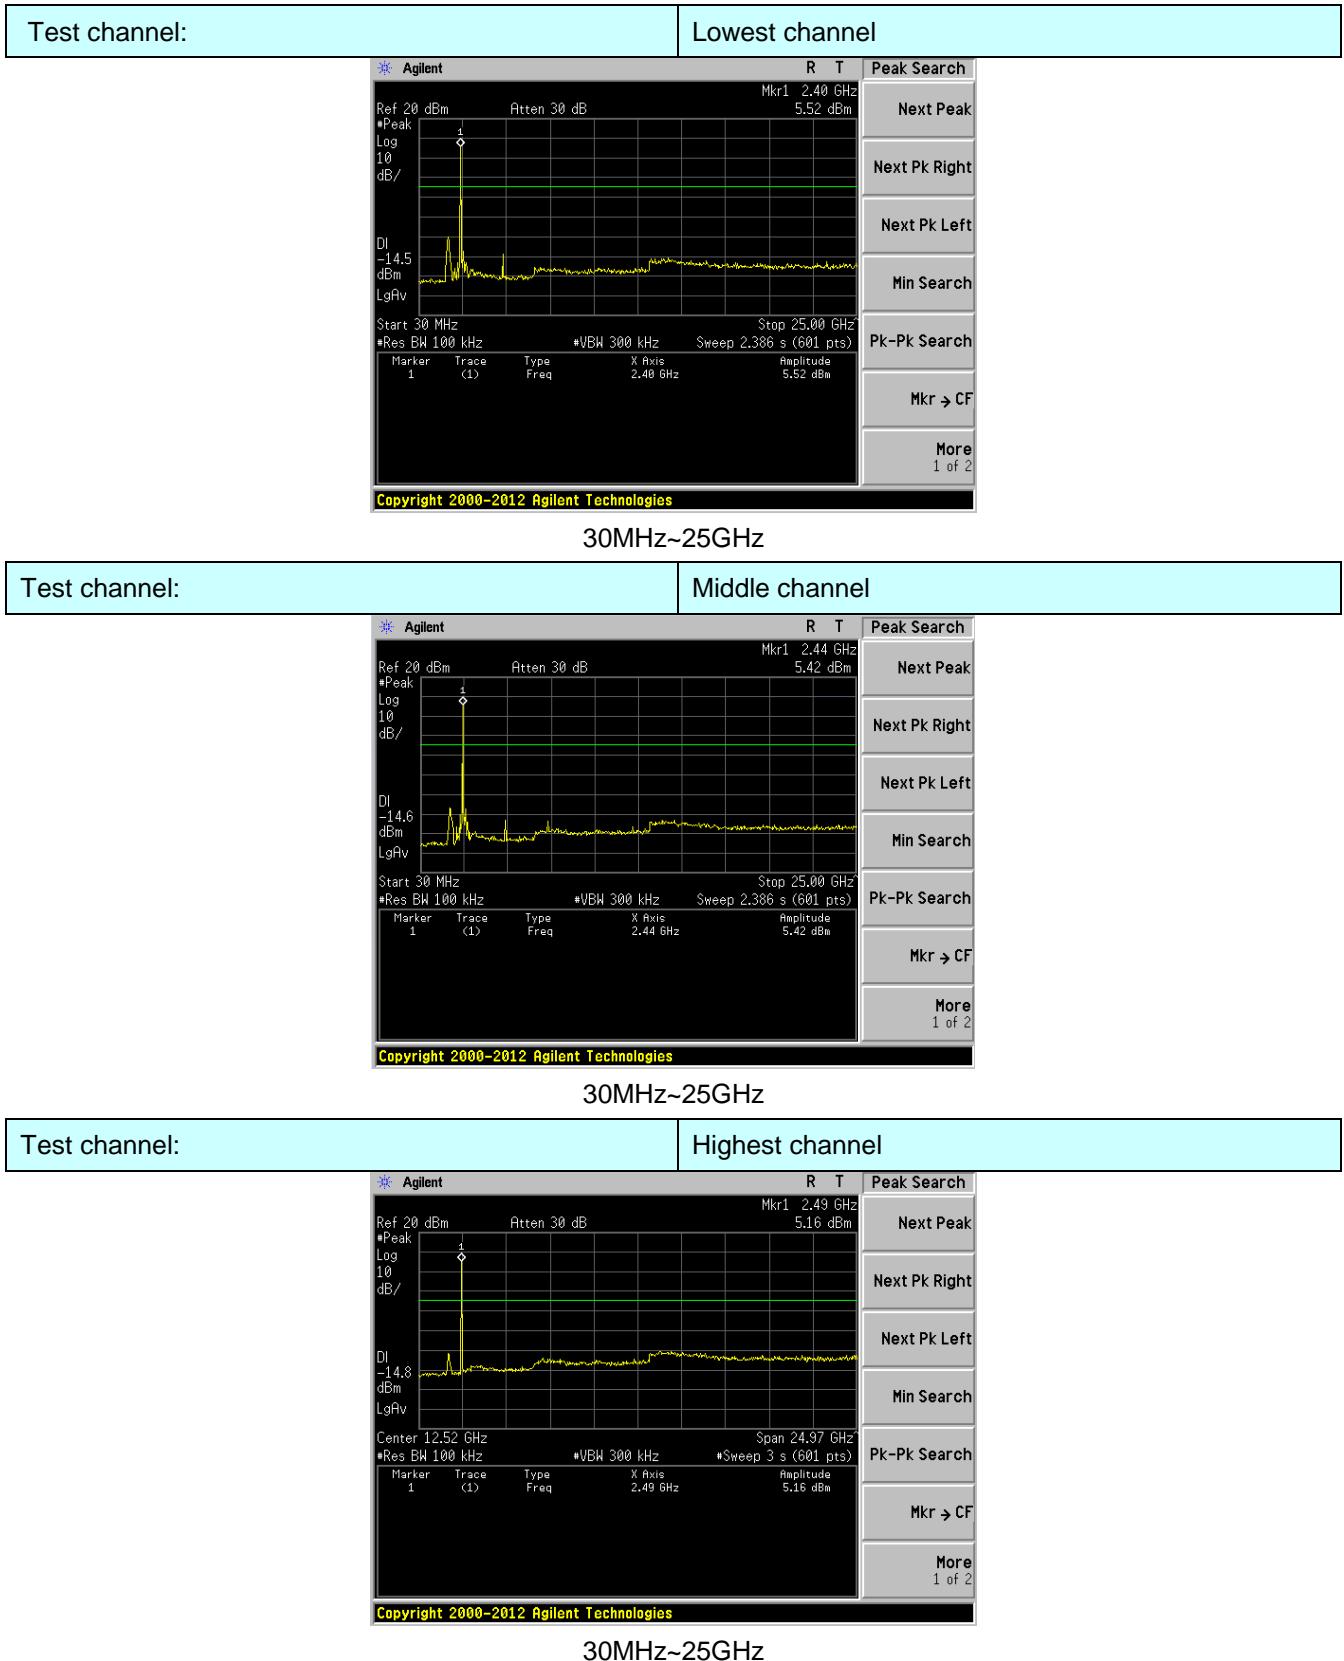

## 7.9.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209													
Test Method:	ANSI C63.10:2013													
Test Frequency Range:	9kHz to 25GHz													
Test site:	Measurement Distance: 3m													
Receiver setup:	Frequency	Detector	RBW	VBW	Remark									
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value									
	Above 1GHz	Peak	1MHz	3MHz	Peak Value									
Limit:		Peak	1MHz	10Hz	Average Value									
Frequency	Limit (dBuV/m @3m)		Remark											
30MHz-88MHz	40.0		Quasi-peak Value											
88MHz-216MHz	43.5		Quasi-peak Value											
216MHz-960MHz	46.0		Quasi-peak Value											
960MHz-1GHz	54.0		Quasi-peak Value											
Above 1GHz	54.0		Average Value											
	Test setup:		74.0		Peak Value									
Below 1GHz														
							Above 1GHz							


Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

*Remark:*


1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. The measured filed strength at frequencies below 30MHz are lower than the limit over 30dB. So the data isn't reported.

**Measurement data:**
**■ Below 1GHz**

Horizontal:

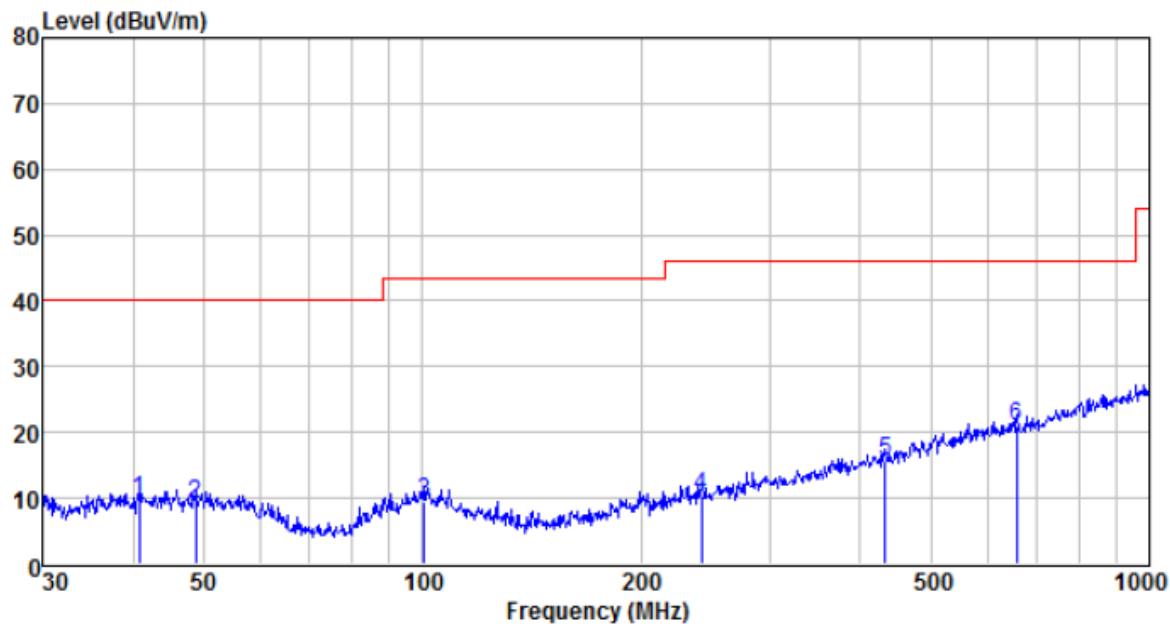

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
40.702	26.93	12.27	0.67	30.04	9.83	40.00	-30.17	QP
48.672	26.27	12.23	0.76	30.01	9.25	40.00	-30.75	QP
100.581	25.83	12.10	1.19	29.70	9.42	43.50	-34.08	QP
241.676	26.33	11.56	2.08	29.57	10.40	46.00	-35.60	QP
432.546	25.80	16.17	3.01	29.43	15.55	46.00	-30.45	QP
656.530	26.57	19.58	3.94	29.24	20.85	46.00	-25.15	QP

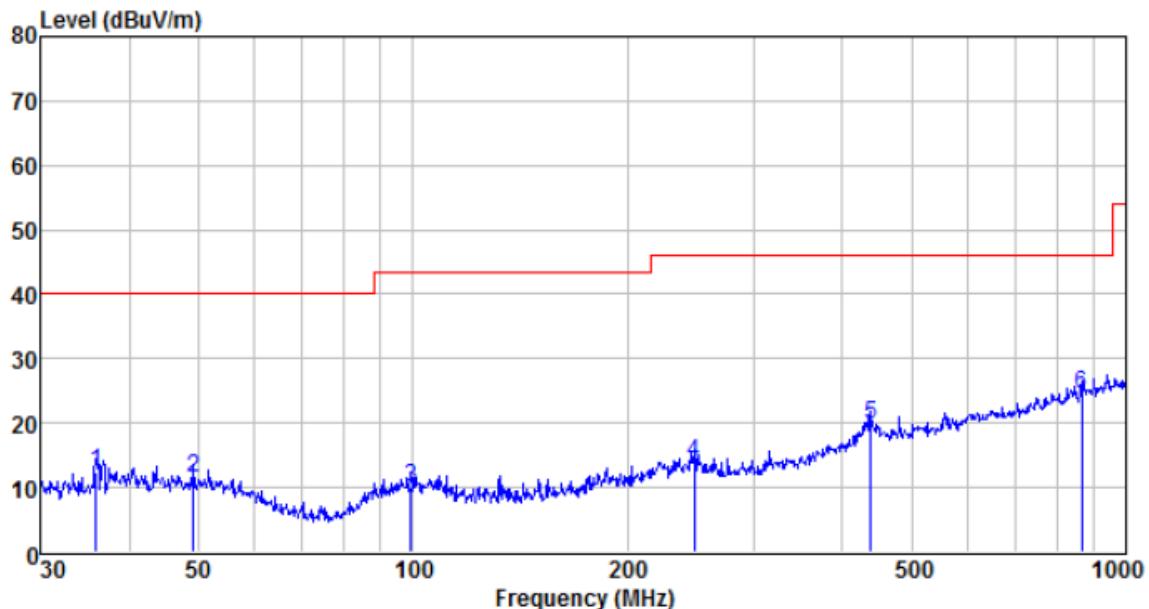**Vertical:**


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
35.875	30.68	11.20	0.62	30.07	12.43	40.00	-27.57	QP
49.187	28.56	12.23	0.76	30.00	11.55	40.00	-28.45	QP
99.180	26.94	11.73	1.18	29.70	10.15	43.50	-33.35	QP
247.682	29.73	11.75	2.11	29.63	13.96	46.00	-32.04	QP
438.655	29.86	16.29	3.04	29.42	19.77	46.00	-26.23	QP
866.088	26.96	21.91	4.73	29.13	24.47	46.00	-21.53	QP

■ Above 1GHz

Test channel:	Lowest
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4816.00	54.84	31.79	8.61	32.09	63.15	74.00	-10.85	Vertical
7224.00	30.12	36.19	11.66	31.99	45.98	74.00	-28.02	Vertical
9632.00	31.32	38.01	14.16	31.58	51.91	74.00	-22.09	Vertical
12040.00	*					74.00		Vertical
14448.00	*					74.00		Vertical
4816.00	51.81	31.79	8.61	32.09	60.12	74.00	-13.88	Horizontal
7224.00	29.52	36.19	11.66	31.99	45.38	74.00	-28.62	Horizontal
9632.00	28.67	38.01	14.16	31.58	49.26	74.00	-24.74	Horizontal
12040.00	*					74.00		Horizontal
14448.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4816.00	40.74	31.79	8.61	32.09	49.05	54.00	-4.95	Vertical
7224.00	20.07	36.19	11.66	31.99	35.93	54.00	-18.07	Vertical
9632.00	20.42	38.01	14.16	31.58	41.01	54.00	-12.99	Vertical
12040.00	*					54.00		Vertical
14448.00	*					54.00		Vertical
4816.00	41.81	31.79	8.61	32.09	50.12	54.00	-3.88	Horizontal
7224.00	19.81	36.19	11.66	31.99	35.67	54.00	-18.33	Horizontal
9632.00	17.63	38.01	14.16	31.58	38.22	54.00	-15.78	Horizontal
12040.00	*					54.00		Horizontal
14448.00	*					54.00		Horizontal

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- “\*”, means this data is the too weak instrument of signal is unable to test.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4883.20	49.07	31.85	8.66	32.12	57.46	74.00	-16.54	Vertical
7324.80	30.40	36.37	11.72	31.89	46.60	74.00	-27.40	Vertical
9766.40	30.18	38.35	14.25	31.59	51.19	74.00	-22.81	Vertical
12208.00	*					74.00		Vertical
14649.60	*					74.00		Vertical
4883.20	49.77	31.85	8.66	32.12	58.16	74.00	-15.84	Horizontal
7324.80	29.93	36.56	11.79	31.8	46.48	74.00	-27.52	Horizontal
9766.40	27.49	38.81	14.35	31.85	48.80	74.00	-25.20	Horizontal
12208.00	*					74.00		Horizontal
14649.60	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4883.20	39.21	31.85	8.66	32.12	47.60	54.00	-6.40	Vertical
7324.80	19.69	36.37	11.72	31.89	35.89	54.00	-18.11	Vertical
9766.40	19.52	38.35	14.25	31.59	40.53	54.00	-13.47	Vertical
12208.00	*					54.00		Vertical
14649.60	*					54.00		Vertical
4883.20	41.22	31.85	8.66	32.12	49.61	54.00	-4.39	Horizontal
7324.80	20.65	36.37	11.72	31.89	36.85	54.00	-17.15	Horizontal
9766.40	18.60	38.35	14.25	31.59	39.61	54.00	-14.39	Horizontal
12208.00	*					54.00		Horizontal
14649.60	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest
---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4955.20	50.67	31.91	8.71	32.16	59.13	74.00	-14.87	Vertical
7432.80	29.61	36.56	11.79	31.8	46.16	74.00	-27.84	Vertical
9910.40	28.76	38.81	14.35	31.85	50.07	74.00	-23.93	Vertical
12388.00	*					74.00		Vertical
14865.60	*					74.00		Vertical
4955.20	49.57	31.91	8.71	32.16	58.03	74.00	-15.97	Horizontal
7432.80	28.85	36.56	11.79	31.8	45.40	74.00	-28.60	Horizontal
9910.40	28.48	38.81	14.35	31.85	49.79	74.00	-24.21	Horizontal
12388.00	*					74.00		Horizontal
14865.60	*					74.00		Horizontal

**Average value:**


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4955.20	40.49	31.91	8.71	32.16	48.95	54.00	-5.05	Vertical
7432.80	20.67	36.56	11.79	31.8	37.22	54.00	-16.78	Vertical
9910.40	19.23	38.81	14.35	31.85	40.54	54.00	-13.46	Vertical
12388.00	*					54.00		Vertical
14865.60	*					54.00		Vertical
4955.20	39.12	31.91	8.71	32.16	47.58	54.00	-6.42	Horizontal
7432.80	20.40	36.56	11.79	31.8	36.95	54.00	-17.05	Horizontal
9910.40	18.02	38.81	14.35	31.85	39.33	54.00	-14.67	Horizontal
12388.00	*					54.00		Horizontal
14865.60	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 8 Test Setup Photo

Radiated Emission

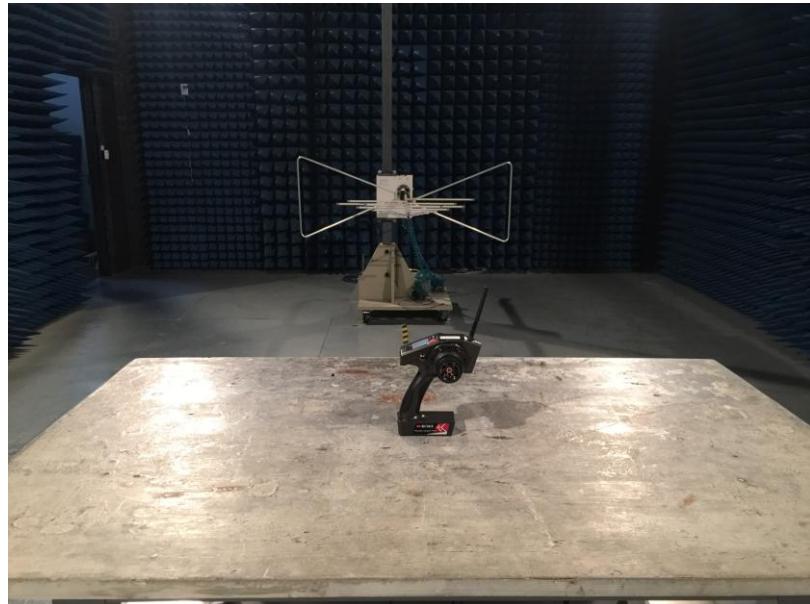

## 9 EUT Constructional Details



TX: RC6GS












TX: THT6






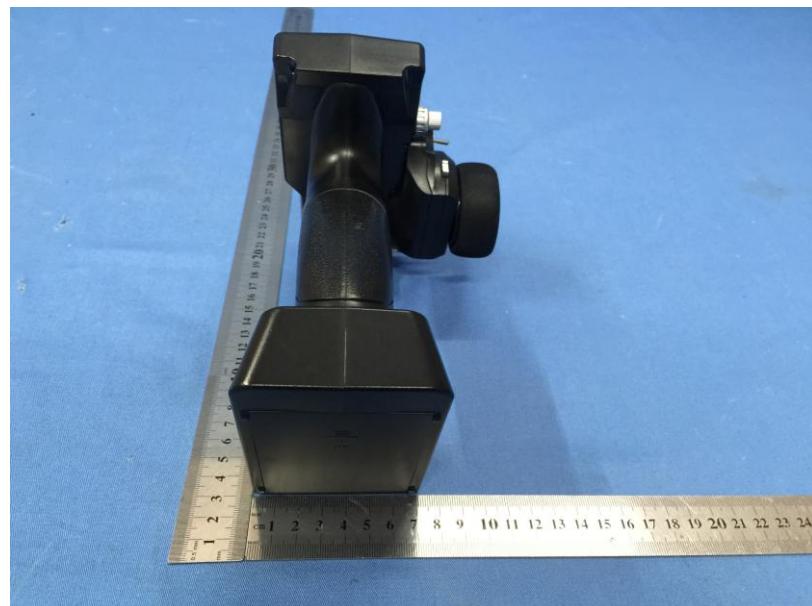








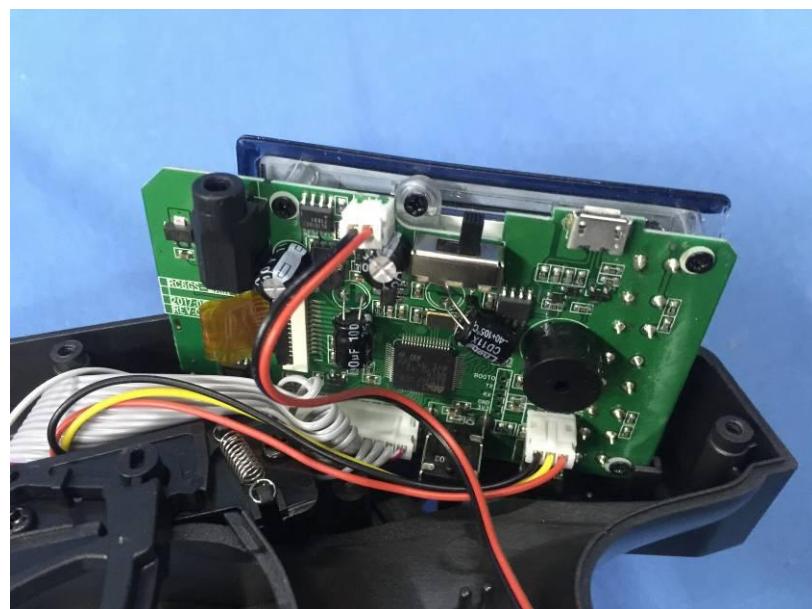
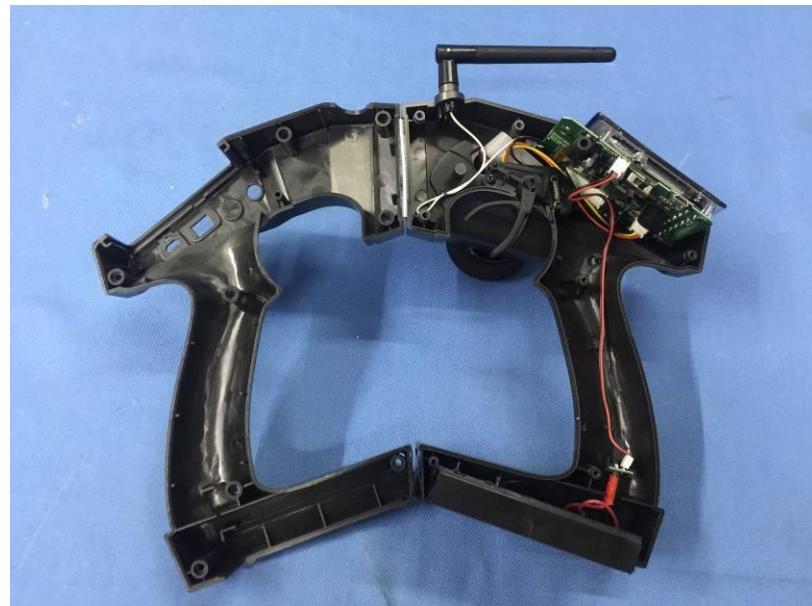


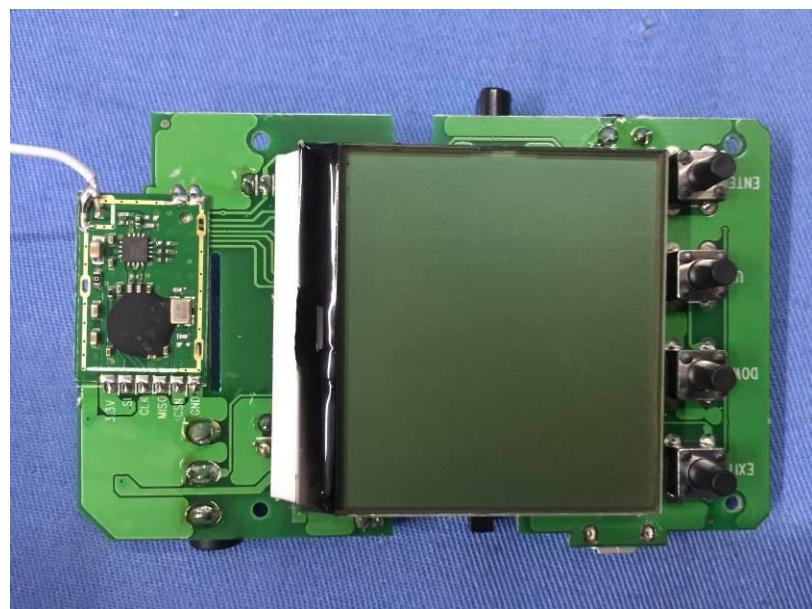
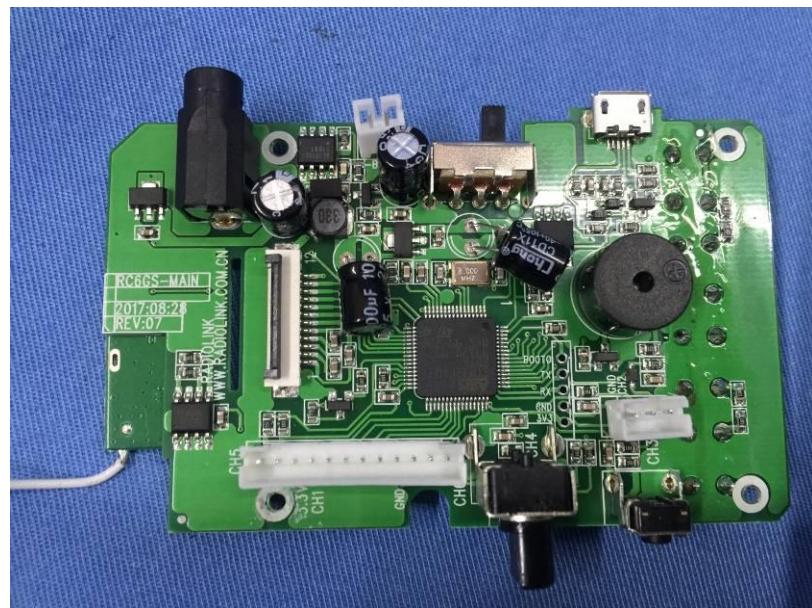


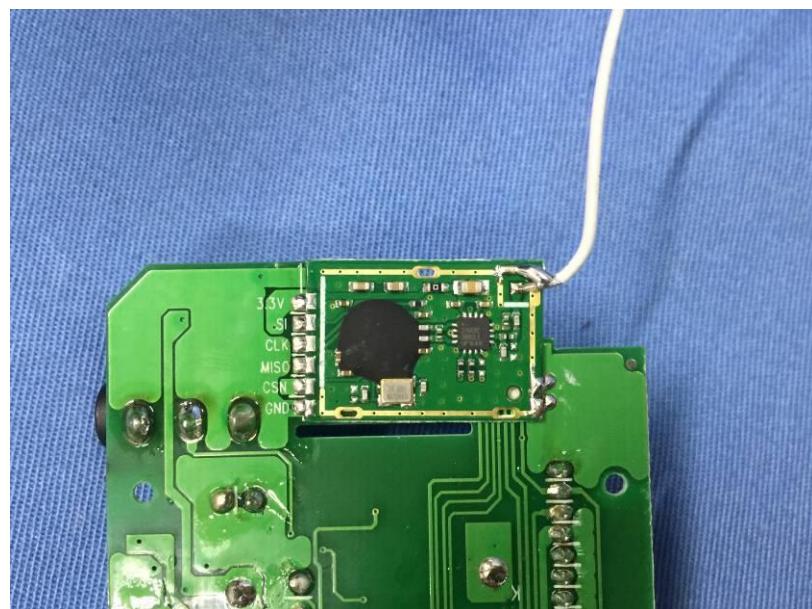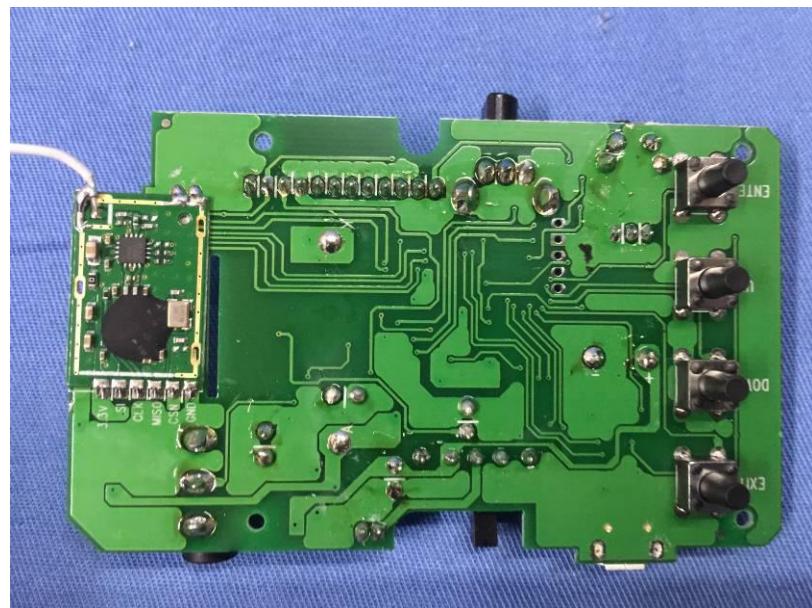



RX:

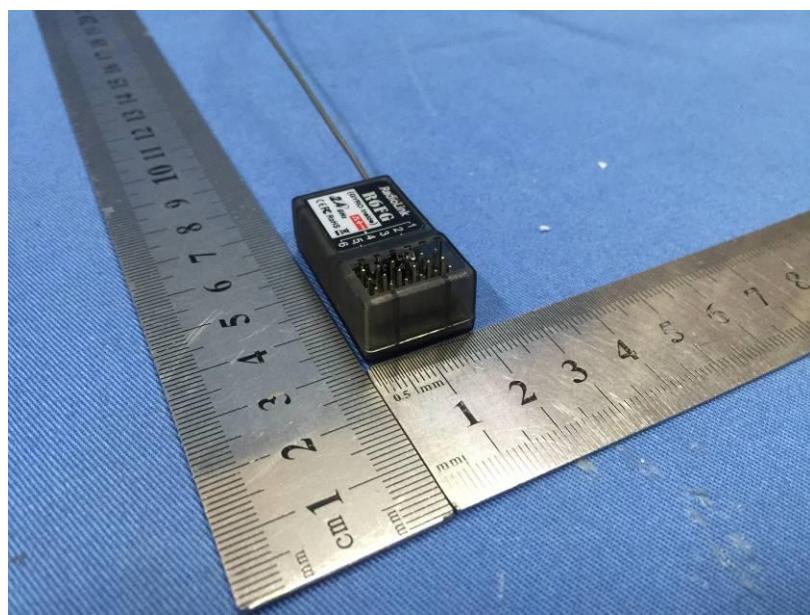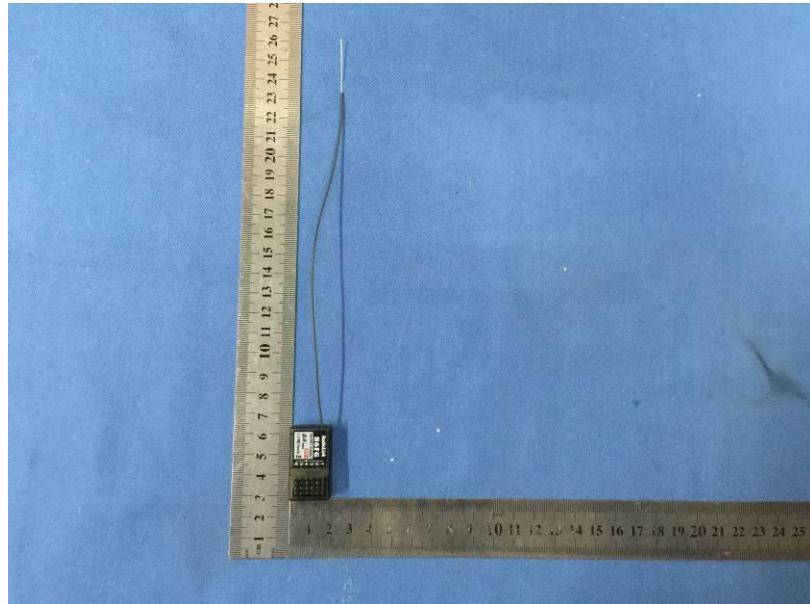

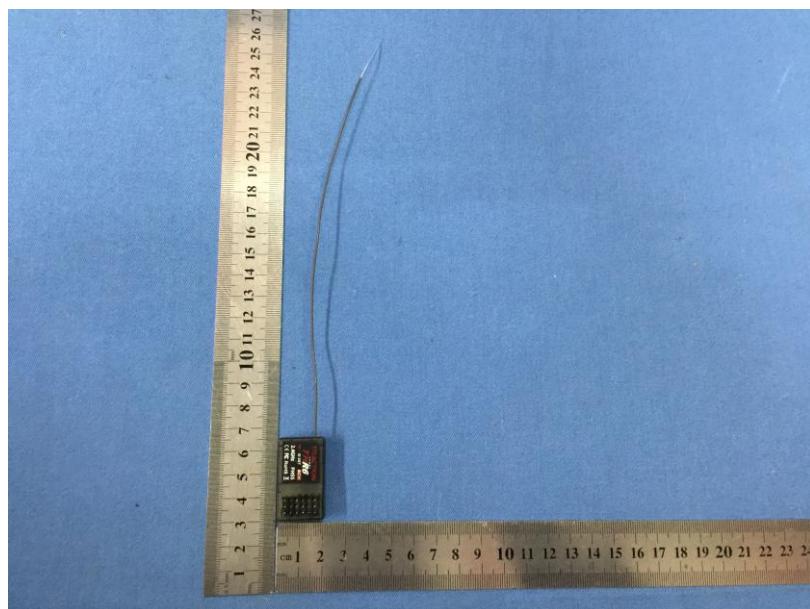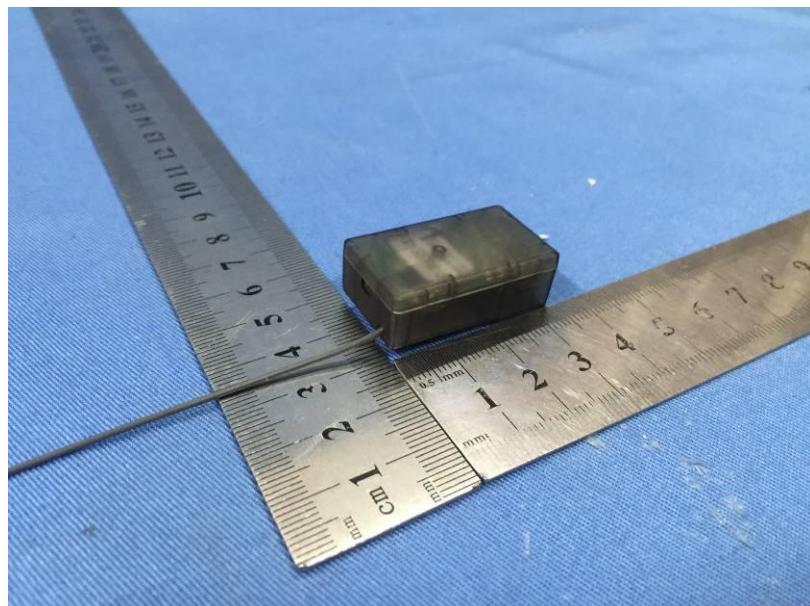

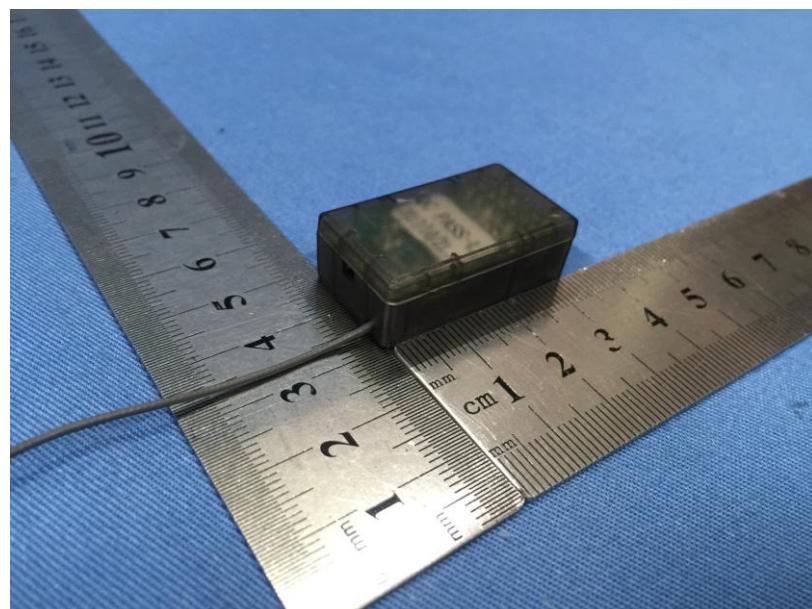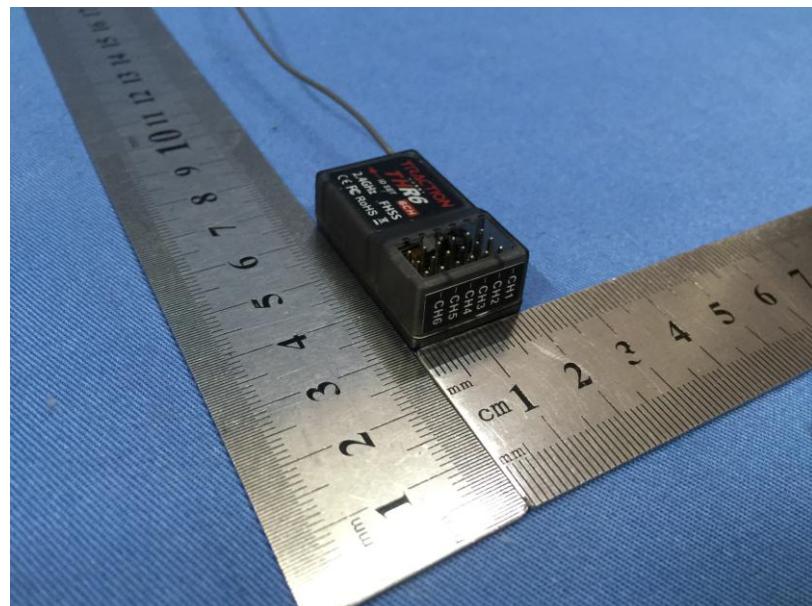

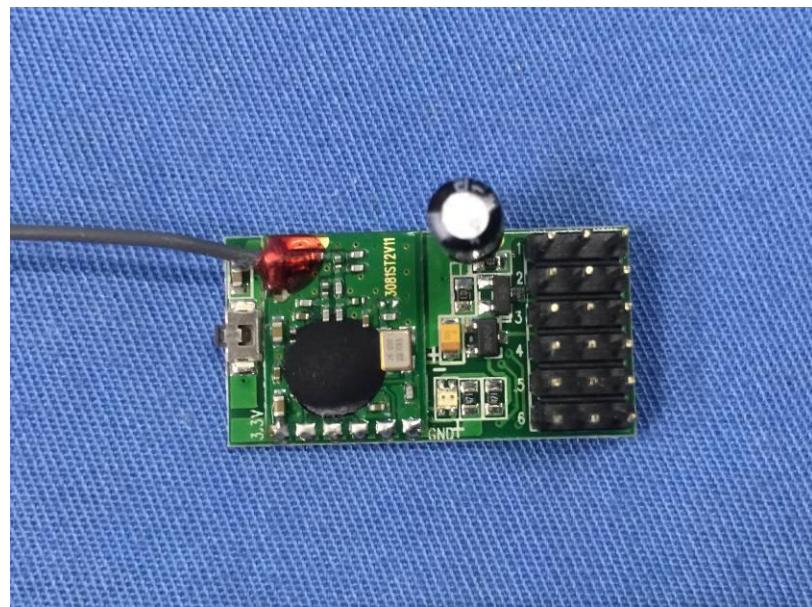

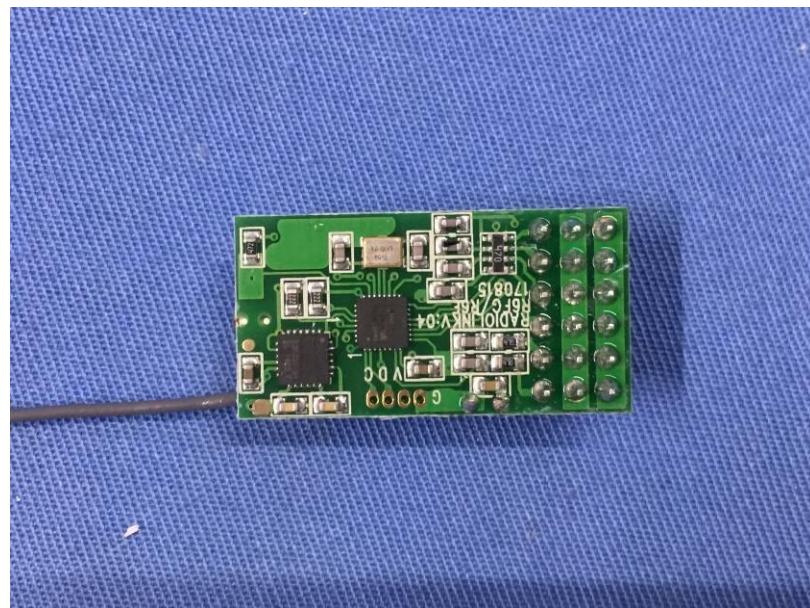

-----End-----