



A D T

# FCC TEST REPORT

**REPORT NO.:** RF980117L06

**MODEL NO.:** ECB3500

**RECEIVED:** Jan. 17, 2009

**TESTED:** Apr. 13 ~ Apr. 22, 2009

**ISSUED:** Apr. 28, 2009

**APPLICANT:** Senao Networks Inc.

**ADDRESS:** 3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 72 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





## Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS .....	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3	GENERAL INFORMATION .....	6
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	12
3.4	DESCRIPTION OF SUPPORT UNITS .....	12
4	TEST TYPES AND RESULTS .....	13
4.1	RADIATED EMISSION MEASUREMENT .....	13
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	13
4.1.2	TEST INSTRUMENTS.....	14
4.1.3	TEST PROCEDURES .....	15
4.1.4	DEVIATION FROM TEST STANDARD.....	15
4.1.5	TEST SETUP.....	16
4.1.6	EUT OPERATING CONDITIONS .....	16
4.1.7	TEST RESULTS .....	17
4.2	CONDUCTED EMISSION MEASUREMENT .....	28
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	28
4.2.2	TEST INSTRUMENTS.....	28
4.2.3	TEST PROCEDURES .....	29
4.2.4	DEVIATION FROM TEST STANDARD.....	29
4.2.5	TEST SETUP.....	30
4.2.6	EUT OPERATING CONDITIONS .....	30
4.2.7	TEST RESULTS .....	31
4.3	6dB BANDWIDTH MEASUREMENT.....	39
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	39
4.3.2	TEST INSTRUMENTS.....	39
4.3.3	TEST PROCEDURE .....	39
4.3.4	DEVIATION FROM TEST STANDARD.....	39
4.3.5	TEST SETUP.....	40
4.3.6	EUT OPERATING CONDITIONS .....	40
4.3.7	TEST RESULTS .....	41
4.4	MAXIMUM PEAK OUTPUT POWER.....	46
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	46
4.4.2	TEST INSTRUMENTS.....	46
4.4.3	TEST PROCEDURES .....	46
4.4.4	DEVIATION FROM TEST STANDARD.....	46
4.4.5	TEST SETUP.....	47



A D T

4.4.6	EUT OPERATING CONDITIONS .....	47
4.4.7	TEST RESULTS .....	48
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	49
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	49
4.5.2	TEST INSTRUMENTS.....	49
4.5.3	TEST PROCEDURE.....	49
4.5.4	DEVIATION FROM TEST STANDARD.....	49
4.5.5	TEST SETUP.....	50
4.5.6	EUT OPERATING CONDITIONS .....	50
4.5.7	TEST RESULTS .....	51
4.6	BAND EDGES MEASUREMENT .....	56
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	56
4.6.2	TEST INSTRUMENTS.....	56
4.6.3	TEST PROCEDURE.....	56
4.6.4	DEVIATION FROM TEST STANDARD.....	56
4.6.5	EUT OPERATING CONDITION.....	56
4.6.6	TEST RESULTS .....	57
4.7	ANTENNA REQUIREMENT .....	69
4.7.1	STANDARD APPLICABLE .....	69
4.7.2	ANTENNA CONNECTED CONSTRUCTION .....	69
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	70
6	INFORMATION ON THE TESTING LABORATORIES .....	71
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	72



A D T

## 1 CERTIFICATION

**PRODUCT:** Wireless Long Range Multi-function 7+1 AP

**MODEL NO.:** ECB3500

**BRAND:** EnGenius

**APPLICANT:** Senao Networks Inc.

**TESTED:** Apr. 13 ~ Apr. 22, 2009

**TEST SAMPLE:** ENGINEERING SAMPLE

**STANDARDS:** FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (model: ECB3500) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : Wendy Liao, **DATE:** Apr. 28, 2009  
Wendy Liao / Senior Specialist

**TECHNICAL ACCEPTANCE** : Long Chen, **DATE:** Apr. 28, 2009  
Responsible for RF : Long Chen / Senior Engineer

**APPROVED BY** : Gary Chang, **DATE:** Apr. 28, 2009  
Gary Chang / Assistant Manager



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.01dB at 0.927MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.02dB at 4924.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



A D T

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Long Range Multi-function 7+1 AP
MODEL NO.	ECB3500
FCC ID	U2M-CB36600801
POWER SUPPLY	12Vdc from AC adapter 48Vdc from PoE
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 108Mbps)
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for normal / 1 for turbo
MAXIMUM OUTPUT POWER	506.991mW
ANTENNA TYPE	Dipole antenna with 5dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ACCESSORY DEVICES	Adapter

#### NOTE:

1. The EUT was powered by the following adapter

BRAND:	AMIGO
MODEL:	AMS6-1201000SU
INPUT:	120Vac, 60Hz, 0.5A
OUTPUT:	12Vdc, 1.0A, 12VA
POWER LINE:	1.8m non-shielded cable without core

2. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.
3. This EUT is capable of providing data rates of up to 108Mbps in turbo mode depending upon reception quality.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		


For 802.11g: One channel is provided to this EUT for turbo mode:

CHANNEL	FREQUENCY
6	2437 MHz

### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

#### Test Mode A

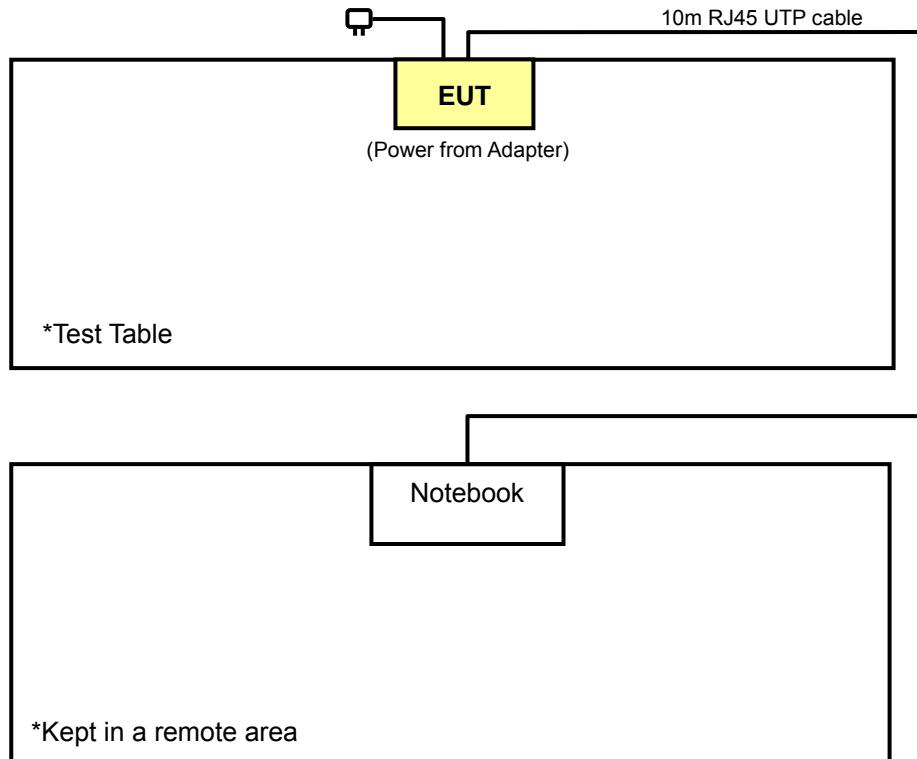

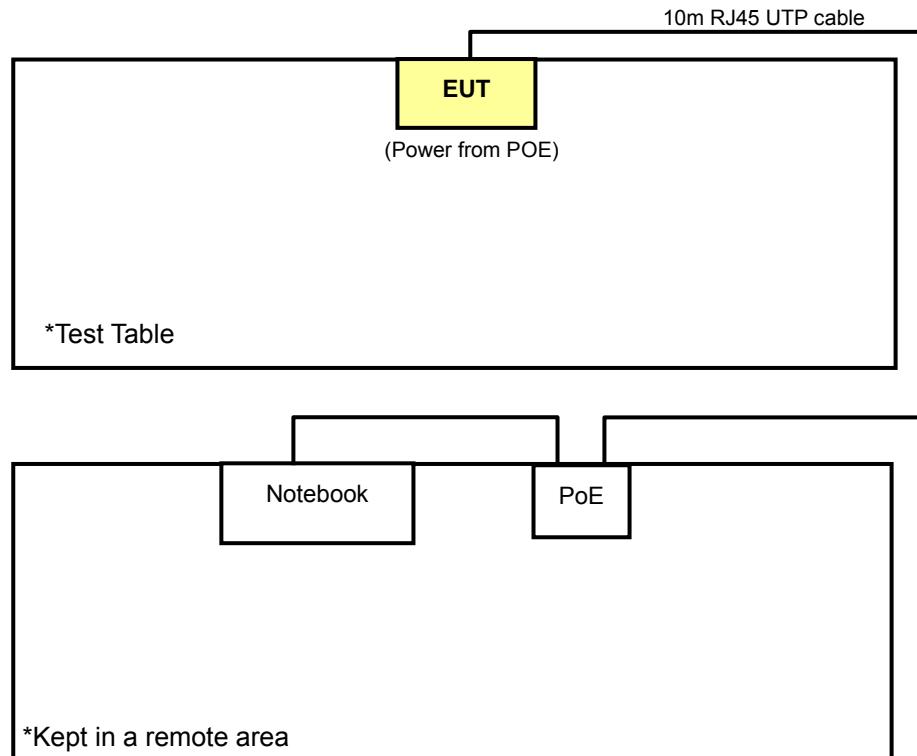**Test Mode B**



A D T

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from Adapter
B	-	√	√	-	Power from PoE

Where **RE≥1G**: Radiated Emission above 1GHz**RE<1G**: Radiated Emission below 1GHz**PLC**: Power Line Conducted Emission**APCM**: Antenna Port Conducted Measurement

NOTE: “-” means no effect

#### RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ Axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATIO N TYPE	DATA RATE (Mbps)	AXIS
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	X
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	
	802.11g Turbo	6	6	OFDM	QPSK	12	

#### RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ Axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATIO N TYPE	DATA RATE (Mbps)	AXIS
A, B	802.11g	1 to 11	6	OFDM	BPSK	6	X
	802.11g Turbo	6	6	OFDM	QPSK	12	



A D T

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11g	1 to 11	6	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12

**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1
	802.11g	1 to 11	1, 11	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**ANSI C63.4- 2003**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	POE	SONICWALL	PD-6001/AC	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m UTP RJ45 cable
2	2m non-shielded cable

**NOTE:** 1. All power cords of the above support units are non shielded (1.8m).  
2. Item 1 acted as a communication partner to transfer data.

## 4 TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun. 30, 2008	Jun. 29, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 04, 2008	Jul. 03, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	May 02, 2008	May 01, 2009
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jun. 24, 2008	Jun. 23, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2008	Dec. 24, 2009
Preamplifier Agilent	8447D	2944A10633	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8449B	3008A01964	Oct. 23, 2008	Oct. 22, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 20, 2008	May 19, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 20, 2008	May 19, 2009
Software ADT.	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 988962.
5. The IC Site Registration No. is IC 7450F-3.



A D T

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

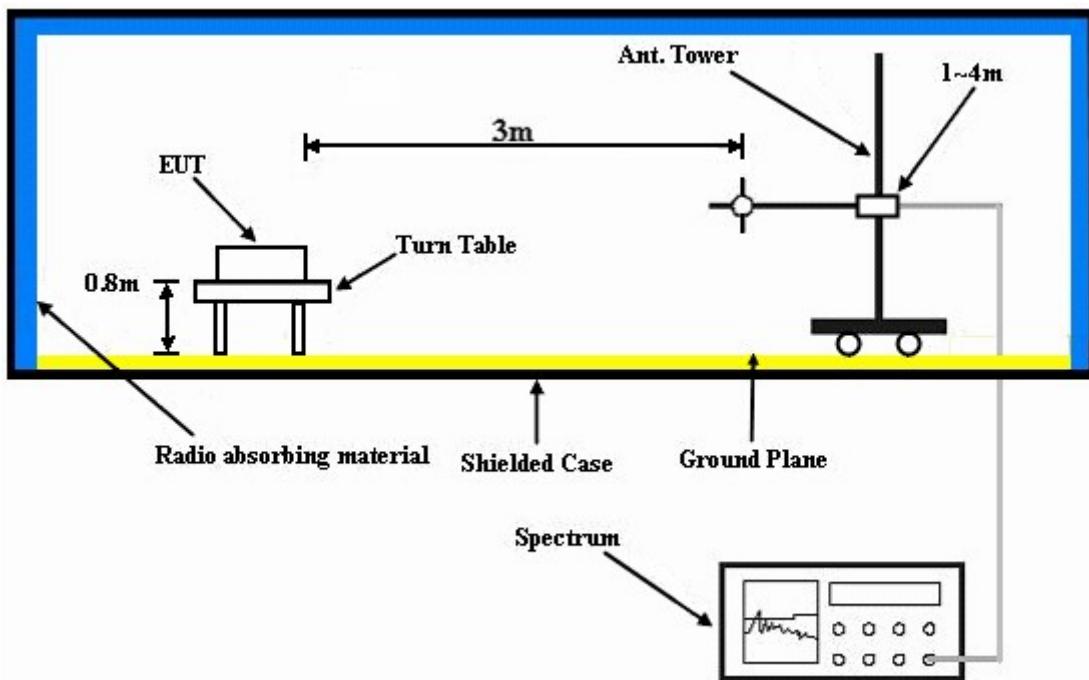

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared the notebook system outside of testing area to act as communication partners.
- c. The communication partner connected with EUT via a RJ45 UTP cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".



A D T

#### 4.1.7 TEST RESULTS

##### 802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		22deg. C, 65%RH 1000hPa		TESTED BY Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.57 PK	74.00	-14.43	1.00 H	58	27.13	32.44
2	2390.00	47.18 AV	54.00	-6.82	1.00 H	58	14.74	32.44
3	*2412.00	105.68 PK			1.26 H	232	73.16	32.52
4	*2412.00	100.99 AV			1.26 H	232	68.47	32.52
5	4824.00	52.60 PK	74.00	-21.40	1.00 H	141	14.30	38.30
6	4824.00	43.94 AV	54.00	-10.06	1.00 H	141	5.64	38.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.78 PK	74.00	-13.22	1.00 V	155	28.34	32.44
2	2390.00	52.14 AV	54.00	-1.86	1.00 V	155	19.70	32.44
3	*2412.00	114.59 PK			1.00 V	148	82.07	32.52
4	*2412.00	109.31 AV			1.00 V	148	76.79	32.52
5	4824.00	54.85 PK	74.00	-19.15	1.00 V	341	16.55	38.30
6	4824.00	50.89 AV	54.00	-3.11	1.00 V	341	12.59	38.30

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.49 PK			1.00 H	306	73.89	32.60
2	*2437.00	101.41 AV			1.00 H	306	68.81	32.60
3	4874.00	52.66 PK	74.00	-21.34	1.00 H	158	14.16	38.50
4	4874.00	43.81 AV	54.00	-10.19	1.00 H	158	5.31	38.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.29 PK			1.00 V	267	82.69	32.60
2	*2437.00	110.14 AV			1.00 V	267	77.54	32.60
3	4874.00	57.96 PK	74.00	-16.04	1.04 V	221	19.46	38.50
4	4874.00	52.96 AV	54.00	-1.04	1.04 V	221	14.46	38.50

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.85 PK			1.35 H	282	73.17	32.68
2	*2462.00	101.02 AV			1.35 H	282	68.34	32.68
3	2483.50	57.97 PK	74.00	-16.03	1.00 H	63	25.21	32.76
4	2483.50	47.69 AV	54.00	-6.31	1.00 H	63	14.93	32.76
5	4924.00	51.93 PK	74.00	-22.07	1.00 H	137	13.29	38.64
6	4924.00	44.15 AV	54.00	-9.85	1.00 H	137	5.51	38.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.80 PK			1.00 V	164	82.12	32.68
2	*2462.00	109.75 AV			1.00 V	164	77.07	32.68
3	2483.50	61.24 PK	74.00	-12.76	1.02 V	159	28.48	32.76
4	2483.50	52.97 AV	54.00	-1.03	1.02 V	159	20.21	32.76
5	4924.00	57.61 PK	74.00	-16.39	1.02 V	202	18.97	38.64
6	4924.00	52.98 AV	54.00	-1.02	1.02 V	202	14.34	38.64

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*”: Fundamental frequency.



A D T

## 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		22deg. C, 65%RH 1000hPa		TESTED BY Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.17 PK	74.00	-12.83	1.00 H	227	28.73	32.44
2	2390.00	48.72 AV	54.00	-5.28	1.00 H	227	16.28	32.44
3	*2412.00	104.30 PK			1.00 H	218	71.78	32.52
4	*2412.00	92.83 AV			1.00 H	218	60.31	32.52
5	4824.00	49.07 PK	74.00	-24.93	1.00 H	58	10.77	38.30
6	4824.00	36.43 AV	54.00	-17.57	1.00 H	58	-1.87	38.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.41 PK	74.00	-6.59	1.00 V	172	34.97	32.44
2	2390.00	52.97 AV	54.00	-1.03	1.00 V	172	20.53	32.44
3	*2412.00	116.17 PK			1.00 V	168	83.65	32.52
4	*2412.00	104.96 AV			1.00 V	168	72.44	32.52
5	4824.00	51.43 PK	74.00	-22.57	1.02 V	2	13.13	38.30
6	4824.00	38.27 AV	54.00	-15.73	1.02 V	2	-0.03	38.30

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.47 PK			1.34 H	265	74.87	32.60
2	*2437.00	96.12 AV			1.34 H	265	63.52	32.60
3	4874.00	49.38 PK	74.00	-24.62	1.00 H	74	10.88	38.50
4	4874.00	37.53 AV	54.00	-16.47	1.00 H	74	-0.97	38.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	119.48 PK			1.00 V	161	86.88	32.60
2	*2437.00	108.03 AV			1.00 V	161	75.43	32.60
3	4874.00	54.93 PK	74.00	-19.07	1.00 V	181	16.43	38.50
4	4874.00	41.88 AV	54.00	-12.12	1.00 V	181	3.38	38.50

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH 1000hPa	TESTED BY	Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.32 PK			1.25 H	258	74.64	32.68
2	*2462.00	96.04 AV			1.25 H	258	63.36	32.68
3	2483.50	57.70 PK	74.00	-16.30	1.21 H	249	24.94	32.76
4	2483.50	47.17 AV	54.00	-6.83	1.21 H	249	14.41	32.76
5	4924.00	51.32 PK	74.00	-22.68	1.00 H	62	12.68	38.64
6	4924.00	37.16 AV	54.00	-16.84	1.00 H	62	-1.48	38.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.31 PK			1.00 V	161	86.63	32.68
2	*2462.00	107.96 AV			1.00 V	161	75.28	32.68
3	2483.50	66.26 PK	74.00	-7.74	1.00 V	173	33.50	32.76
4	2483.50	52.46 AV	54.00	-1.54	1.00 V	173	19.70	32.76
5	4924.00	56.06 PK	74.00	-17.94	1.00 V	189	17.42	38.64
6	4924.00	42.88 AV	54.00	-11.12	1.00 V	189	4.24	38.64

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*”: Fundamental frequency.



A D T

## 802.11g OFDM MODULATION (TURBO MODE)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.31 PK	74.00	-16.69	1.00 H	143	24.87	32.44
2	2390.00	46.89 AV	54.00	-7.11	1.00 H	143	14.45	32.44
3	*2437.00	103.99 PK			1.00 H	141	71.39	32.60
4	*2437.00	95.13 AV			1.00 H	141	62.53	32.60
5	2483.50	56.24 PK	74.00	-17.76	1.00 H	142	23.48	32.76
6	2483.50	45.69 AV	54.00	-8.31	1.00 H	142	12.93	32.76
7	4874.00	49.96 PK	74.00	-24.04	1.00 H	66	11.46	38.50
8	4874.00	36.61 AV	54.00	-17.39	1.00 H	66	-1.89	38.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.32 PK	74.00	-13.68	1.01 V	285	27.88	32.44
2	2390.00	51.56 AV	54.00	-2.44	1.01 V	285	19.12	32.44
3	*2437.00	114.13 PK			1.00 V	286	81.53	32.60
4	*2437.00	105.29 AV			1.00 V	286	72.69	32.60
5	2483.50	58.02 PK	74.00	-15.98	1.00 V	279	25.26	32.76
6	2483.50	48.91 AV	54.00	-5.09	1.00 V	279	16.15	32.76
7	4874.00	50.86 PK	74.00	-23.14	1.02 V	6	12.36	38.50
8	4874.00	37.81 AV	54.00	-16.19	1.02 V	6	-0.69	38.50

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “\*”: Fundamental frequency.



A D T

## BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 6	FREQUENCY RANGE		Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION		Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 64%RH 999hPa	TEST MODE		A
TESTED BY	Antony Lee			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	183.50	40.12 QP	43.50	-3.38	1.25 H	286	28.74	11.38
2	275.98	36.31 QP	46.00	-9.69	1.00 H	265	22.55	13.76
3	368.21	39.83 QP	46.00	-6.17	1.00 H	103	23.12	16.71
4	416.81	35.81 QP	46.00	-10.19	1.75 H	262	17.34	18.47
5	504.31	36.77 QP	46.00	-9.23	1.50 H	304	16.25	20.52
6	920.38	33.40 QP	46.00	-12.60	1.00 H	325	5.23	28.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.51	35.81 QP	40.00	-4.19	1.00 V	221	22.85	12.97
2	276.82	37.23 QP	46.00	-8.77	1.25 V	52	23.47	13.76
3	368.21	36.27 QP	46.00	-9.73	1.25 V	238	19.56	16.71
4	416.81	41.63 QP	46.00	-4.37	1.25 V	154	23.16	18.47
5	551.98	39.40 QP	46.00	-6.60	1.00 V	317	17.89	21.51
6	910.66	38.52 QP	46.00	-7.48	1.25 V	82	10.47	28.05

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 64%RH 999hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	183.50	33.03 QP	43.50	-10.47	1.25 H	274	21.65	11.38
2	276.82	42.79 QP	46.00	-3.21	1.00 H	67	29.03	13.76
3	368.21	40.00 QP	46.00	-6.00	1.00 H	115	23.29	16.71
4	504.31	35.75 QP	46.00	-10.25	1.75 H	193	15.23	20.52
5	552.91	39.21 QP	46.00	-6.79	1.50 H	328	17.68	21.53
6	751.23	34.16 QP	46.00	-11.84	1.00 H	127	8.65	25.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.51	35.64 QP	40.00	-4.36	1.00 V	4	21.13	14.51
2	101.84	34.47 QP	43.50	-9.03	1.00 V	82	22.90	11.58
3	276.82	37.07 QP	46.00	-8.93	2.00 V	4	23.31	13.76
4	412.92	38.53 QP	46.00	-7.47	1.25 V	70	20.15	18.37
5	438.20	38.55 QP	46.00	-7.45	1.25 V	76	19.54	19.01
6	552.91	39.99 QP	46.00	-6.01	1.00 V	169	18.47	21.53

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

## BELOW 1GHZ WORST-CASE DATA : 802.11g OFDM MODULATION (TURBO MODE)

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 6		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		23deg. C, 64%RH 999hPa		TEST MODE	
TESTED BY		Antony Lee			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	183.50	37.27 QP	43.50	-6.23	1.50 H	283	25.89	11.38
2	276.82	43.63 QP	46.00	-2.37	1.25 H	40	29.87	13.76
3	368.21	38.09 QP	46.00	-7.91	1.00 H	103	21.38	16.71
4	409.04	34.25 QP	46.00	-11.75	1.00 H	304	15.97	18.27
5	751.23	34.86 QP	46.00	-11.14	1.00 H	127	9.35	25.51
6	920.38	36.36 QP	46.00	-9.64	1.25 H	301	8.19	28.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.95	35.86 QP	40.00	-4.14	1.25 V	265	22.88	12.98
2	276.82	40.98 QP	46.00	-5.02	1.50 V	34	27.22	13.76
3	368.21	36.00 QP	46.00	-10.00	1.25 V	238	19.29	16.71
4	436.26	38.73 QP	46.00	-7.27	1.00 V	184	19.77	18.96
5	508.19	38.62 QP	46.00	-7.38	1.00 V	160	18.03	20.60
6	552.91	40.29 QP	46.00	-5.71	1.00 V	148	18.77	21.53

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 64%RH 999hPa	TEST MODE	B
TESTED BY	Antony Lee		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	29.90	34.91 QP	40.00	-5.09	1.50 H	79	22.49	12.42
2	276.82	41.84 QP	46.00	-4.16	1.00 H	94	28.08	13.76
3	368.21	39.74 QP	46.00	-6.26	1.00 H	106	23.03	16.71
4	434.31	35.68 QP	46.00	-10.32	1.75 H	160	16.78	18.91
5	519.86	36.84 QP	46.00	-9.16	1.50 H	292	16.00	20.84
6	552.91	36.65 QP	46.00	-9.35	1.50 H	160	15.12	21.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.51	37.06 QP	40.00	-2.94	1.00 V	10	22.55	14.51
2	101.84	34.96 QP	43.50	-8.54	1.00 V	106	23.39	11.58
3	276.82	40.94 QP	46.00	-5.06	1.25 V	49	27.18	13.76
4	416.81	38.99 QP	46.00	-7.01	1.50 V	307	20.52	18.47
5	552.91	38.74 QP	46.00	-7.26	1.75 V	340	17.22	21.53
6	829.00	33.40 QP	46.00	-12.60	1.25 V	328	6.85	26.55

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 19, 2008	Nov. 18, 2009
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jun. 13, 2008	Jun. 12, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Dec. 04, 2008	Dec. 03, 2009
Software ADT	ADT_Cond_V7.3.7	NA	NA	NA

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

#### 4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP

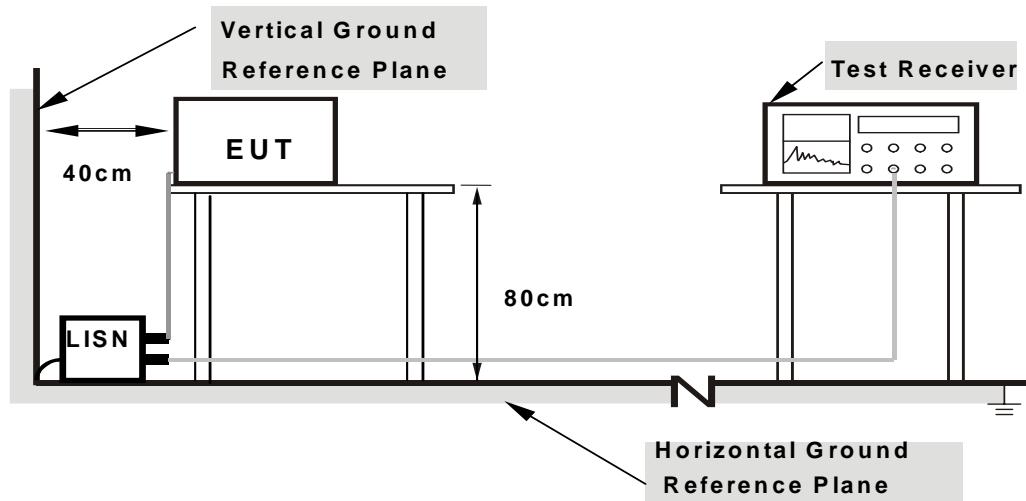

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

#### 4.2.7 TEST RESULTS


##### CONDUCTED WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Lori Chiu		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.275	0.13	39.61	-	39.74	-	60.97	50.97	-21.22	-
2	0.412	0.14	38.37	-	38.51	-	57.61	47.61	-19.10	-
3	0.548	0.15	38.74	-	38.89	-	56.00	46.00	-17.11	-
4	1.578	0.21	40.68	-	40.89	-	56.00	46.00	-15.11	-
5	5.902	0.46	38.55	-	39.01	-	60.00	50.00	-20.99	-
6	11.602	0.74	33.86	-	34.60	-	60.00	50.00	-25.40	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

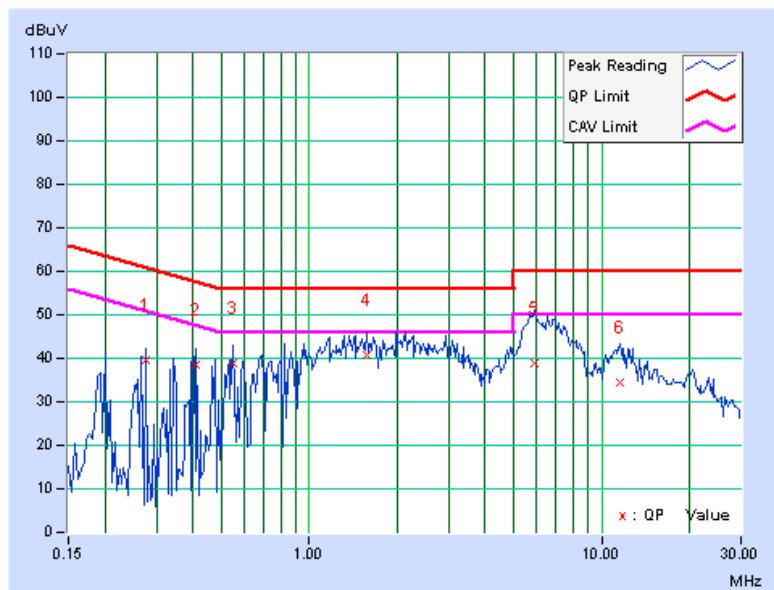

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr. (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.271	0.15	34.49	-	34.64	-	61.08	51.08	-26.44	-
2	0.412	0.16	33.48	-	33.64	-	57.61	47.61	-23.97	-
3	0.908	0.19	29.07	-	29.26	-	56.00	46.00	-26.74	-
4	1.461	0.22	35.74	-	35.96	-	56.00	46.00	-20.04	-
5	6.758	0.51	39.10	-	39.61	-	60.00	50.00	-20.39	-
6	11.570	0.71	31.90	-	32.61	-	60.00	50.00	-27.39	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

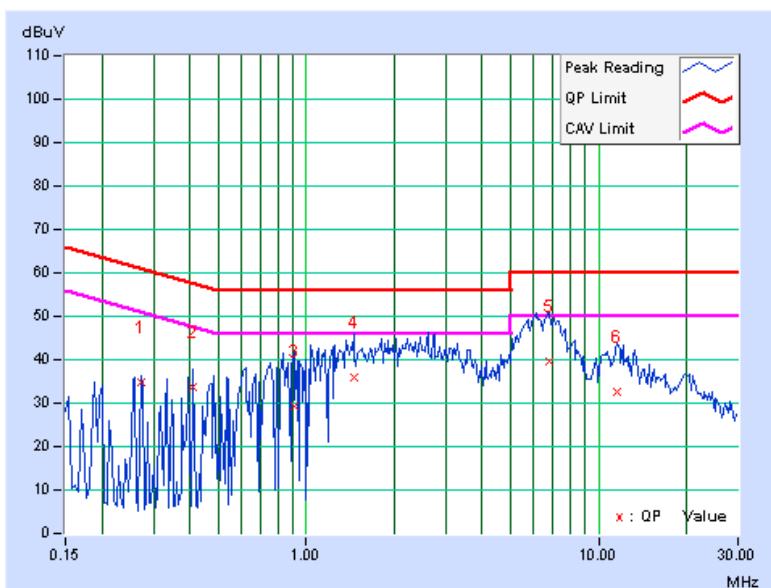


EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr. (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.396	0.14	41.87	-	42.01	-	57.93	47.93	-15.93	-
2	0.541	0.15	39.88	-	40.03	-	56.00	46.00	-15.97	-
3	0.771	0.16	40.99	-	41.15	-	56.00	46.00	-14.85	-
4	0.920	0.17	42.73	-	42.90	-	56.00	46.00	-13.10	-
5	8.500	0.59	35.84	-	36.43	-	60.00	50.00	-23.57	-
6	24.082	1.21	39.24	-	40.45	-	60.00	50.00	-19.55	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

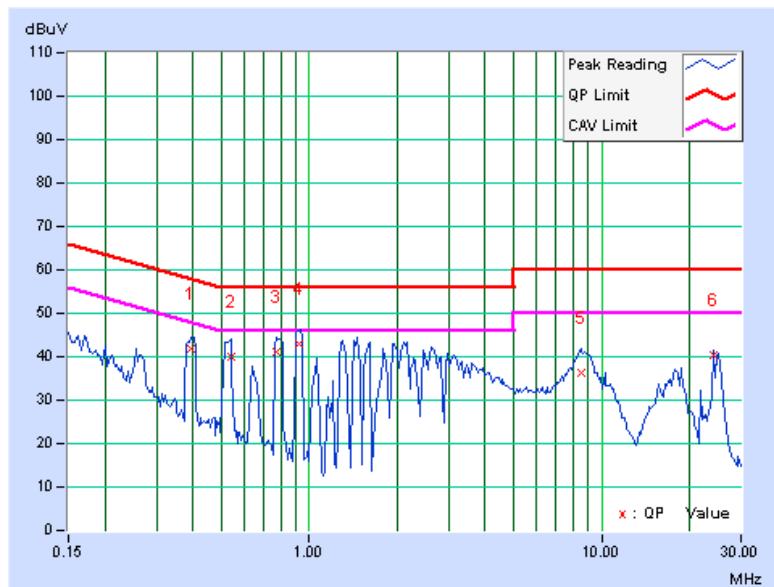

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr. (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.255	0.15	44.63	-	44.78	-	61.58	51.58	-16.79	-
2	0.533	0.17	40.72	-	40.89	-	56.00	46.00	-15.11	-
3	0.931	0.20	42.61	-	42.81	-	56.00	46.00	-13.19	-
4	1.441	0.22	40.26	-	40.48	-	56.00	46.00	-15.52	-
5	8.516	0.59	35.45	-	36.04	-	60.00	50.00	-23.96	-
6	24.082	0.89	41.67	-	42.56	-	60.00	50.00	-17.44	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

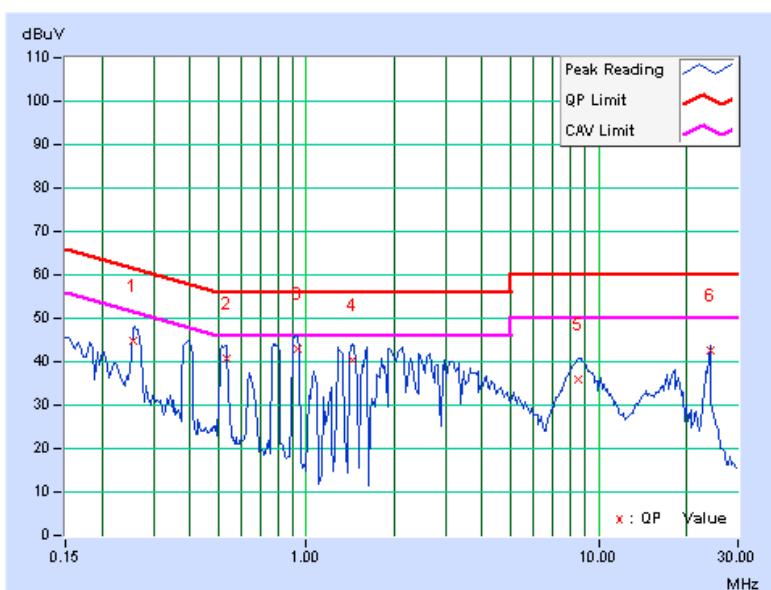

## CONDUCTED WORST-CASE DATA : 802.11g OFDM MODULATION (TURBO MODE)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr. (dB)	Reading Value		Emission Level		Limit		Margin	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.13	35.35	-	35.48	-	63.58	53.58	-28.10	-
2	0.275	0.13	39.55	-	39.68	-	60.97	50.97	-21.28	-
3	0.548	0.15	38.64	-	38.79	-	56.00	46.00	-17.21	-
4	1.594	0.21	37.83	-	38.04	-	56.00	46.00	-17.96	-
5	6.160	0.47	43.49	-	43.96	-	60.00	50.00	-16.04	-
6	10.734	0.70	32.24	-	32.94	-	60.00	50.00	-27.06	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

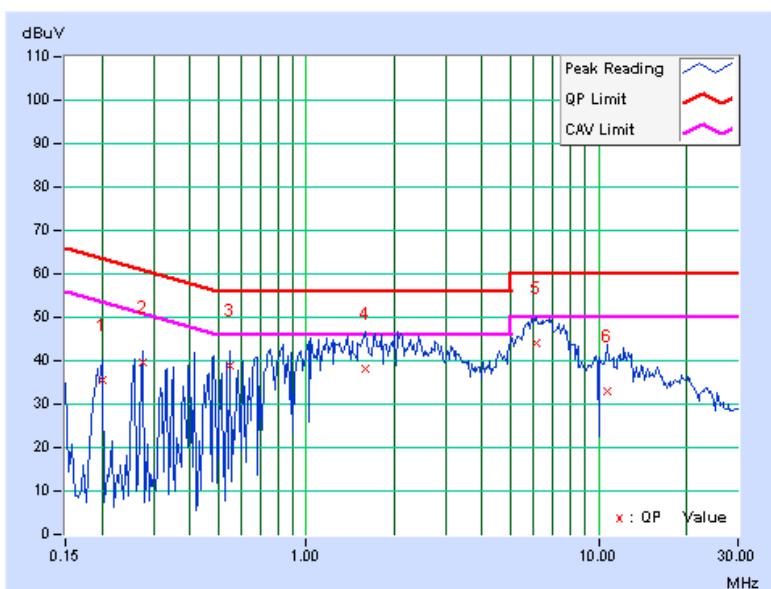

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr. (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.15	33.25	-	33.40	-	63.74	53.74	-30.34	-
2	0.271	0.15	33.78	-	33.93	-	61.08	51.08	-27.15	-
3	0.970	0.20	31.49	-	31.69	-	56.00	46.00	-24.31	-
4	2.633	0.29	37.02	-	37.31	-	56.00	46.00	-18.69	-
5	6.863	0.52	37.85	-	38.37	-	60.00	50.00	-21.63	-
6	12.582	0.74	30.59	-	31.33	-	60.00	50.00	-28.67	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

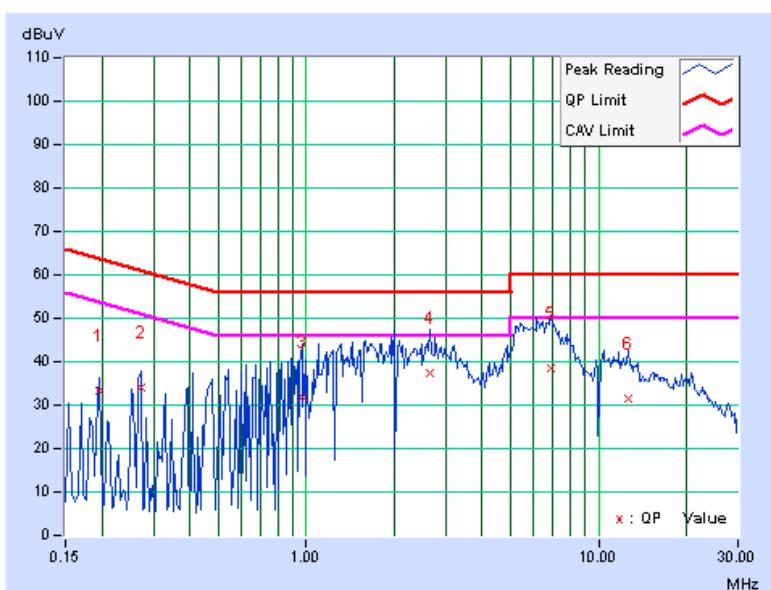

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Lori Chiu		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]	[dB (uV)]	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.396	0.14	41.77	-	41.91	-	57.93	47.93	-16.03	-
2	0.537	0.15	40.70	-	40.85	-	56.00	46.00	-15.15	-
3	0.927	0.18	42.73	-	42.91	-	56.00	46.00	-13.09	-
4	1.410	0.20	39.87	-	40.07	-	56.00	46.00	-15.93	-
5	8.750	0.60	35.21	-	35.81	-	60.00	50.00	-24.19	-
6	25.094	1.22	36.20	-	37.42	-	60.00	50.00	-22.58	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

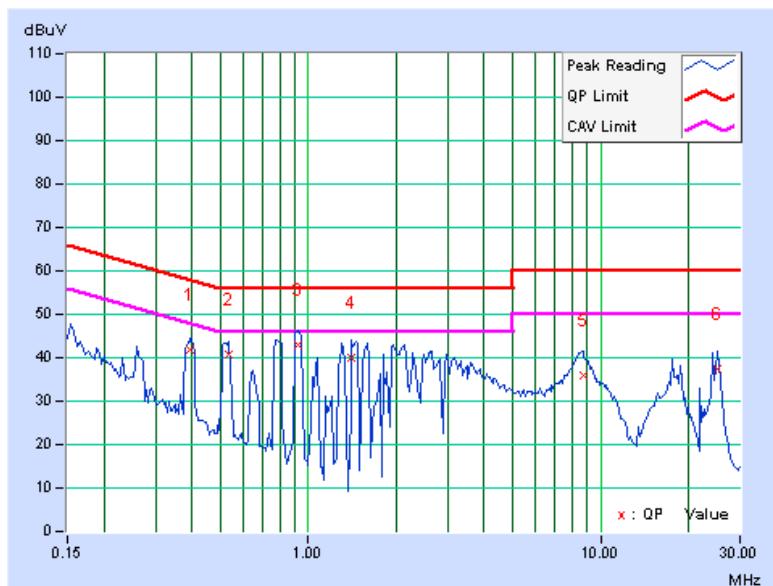

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Lori Chiu		

No	Freq. [MHz]	Corr. (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.267	0.15	44.46	-	44.61	-	61.20	51.20	-16.59	-
2	0.396	0.16	42.59	-	42.75	-	57.93	47.93	-15.19	-
3	0.529	0.17	40.86	-	41.03	-	56.00	46.00	-14.97	-
<b>4</b>	<b>0.927</b>	<b>0.20</b>	<b>42.79</b>	-	<b>42.99</b>	-	<b>56.00</b>	<b>46.00</b>	<b>-13.01</b>	-
5	8.512	0.59	37.03	-	37.62	-	60.00	50.00	-22.38	-
6	25.090	0.87	36.26	-	37.13	-	60.00	50.00	-22.87	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

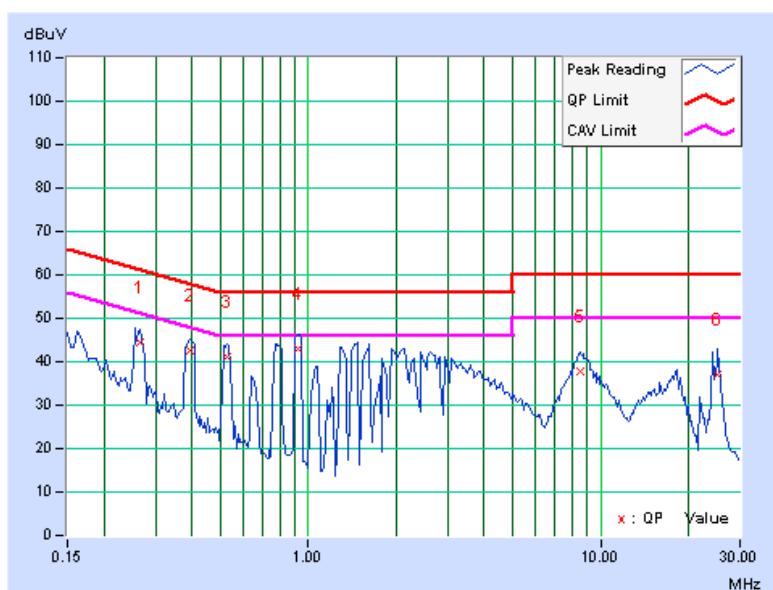



A D T

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 04, 2008	Jul. 03, 2009

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP



#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T


#### 4.3.7 TEST RESULTS

##### 802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.56	0.5	PASS
6	2437	11.15	0.5	PASS
11	2462	11.16	0.5	PASS


##### CH 1

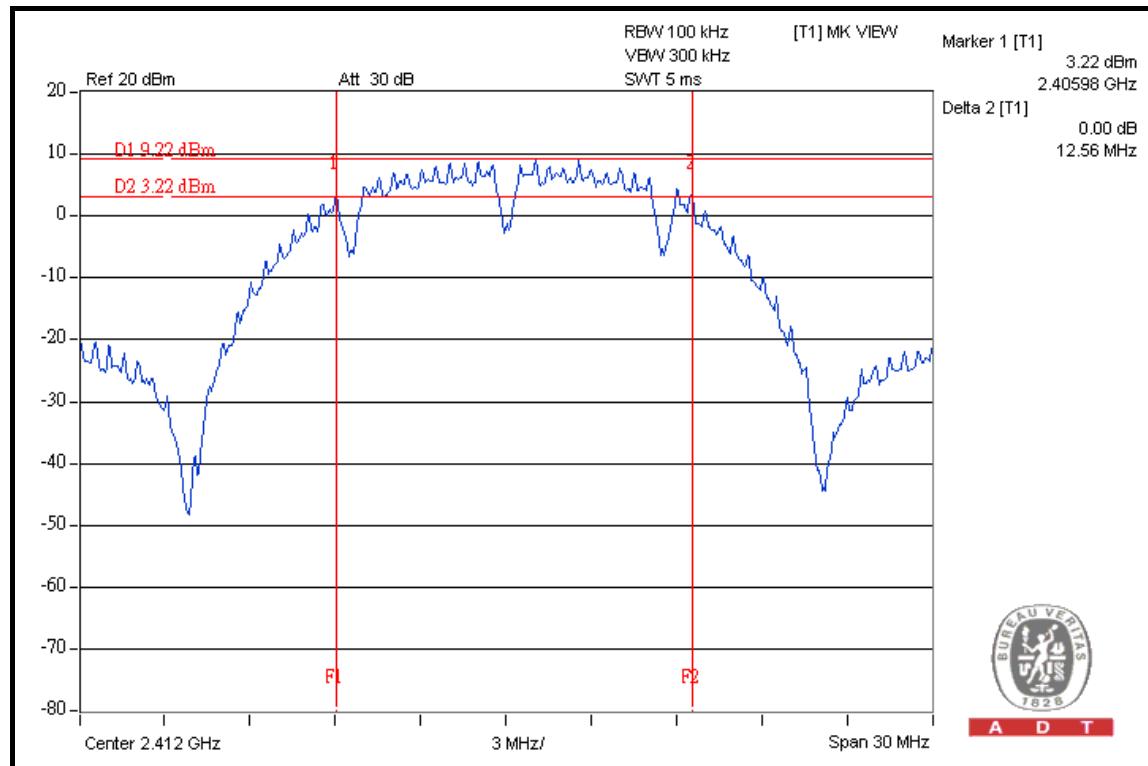




A D T

### CH 6

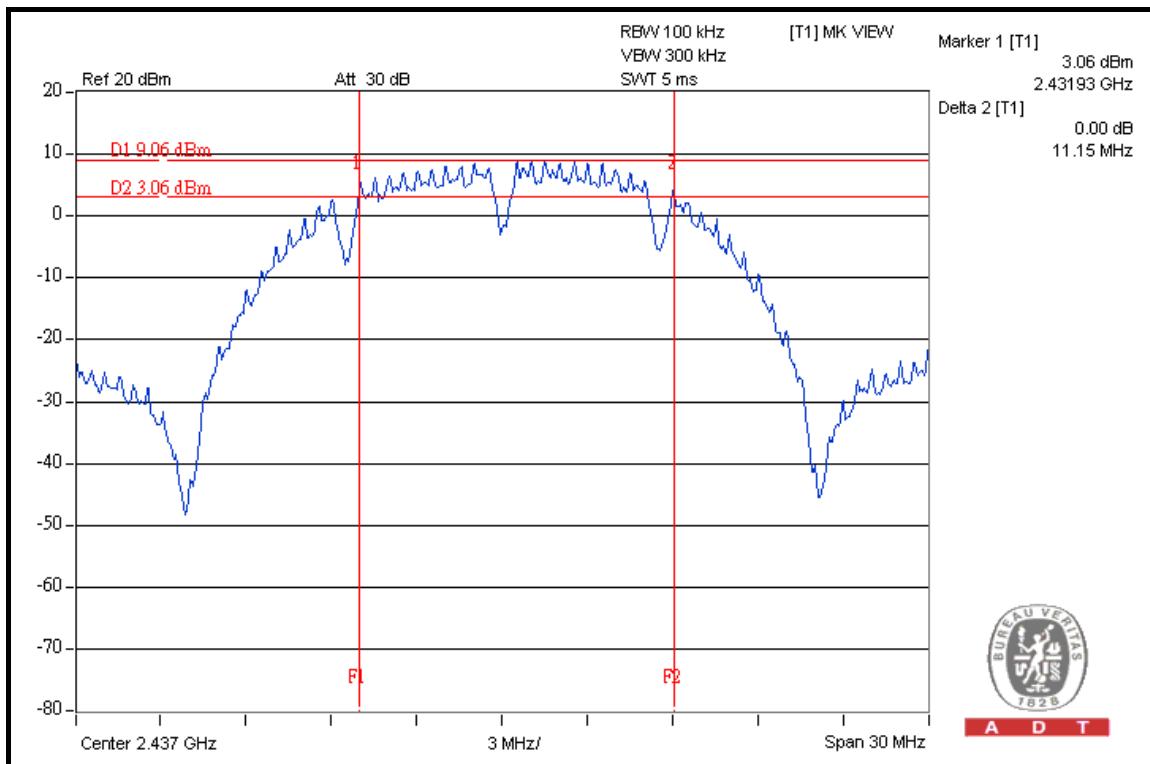

### CH 11

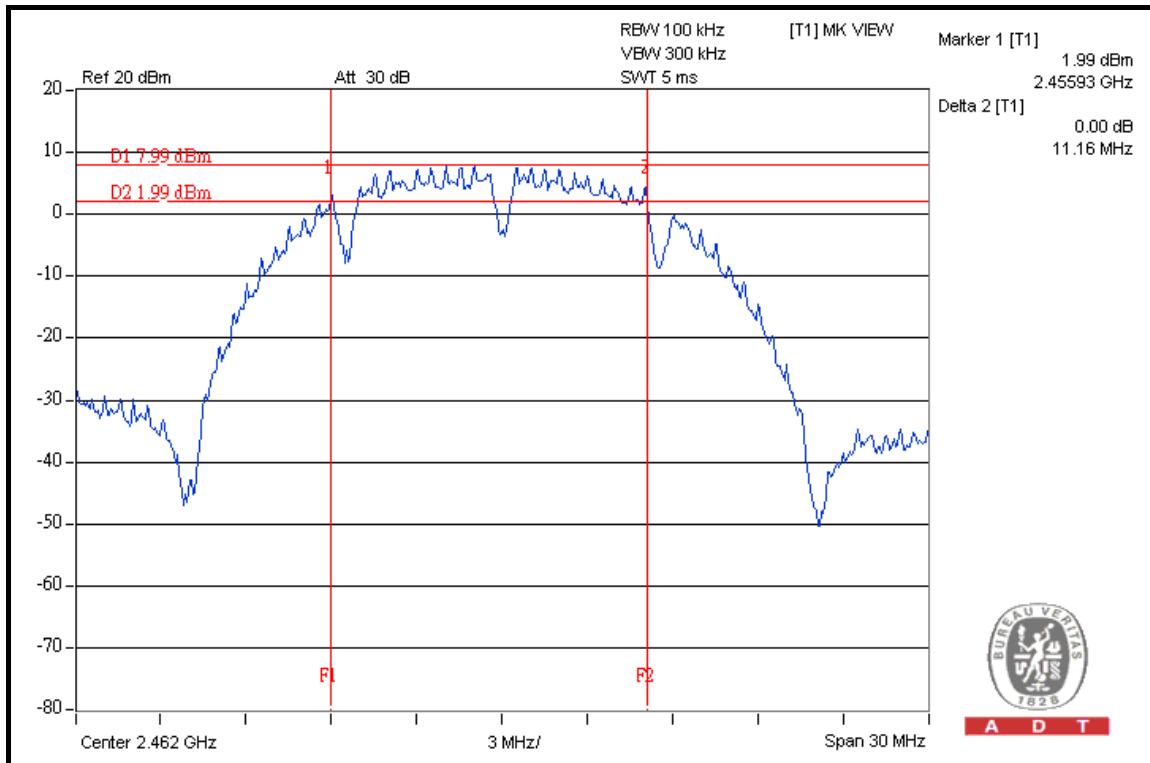




A D T

### 802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.43	0.5	PASS
6	2437	16.43	0.5	PASS
11	2462	15.80	0.5	PASS


### CH 1

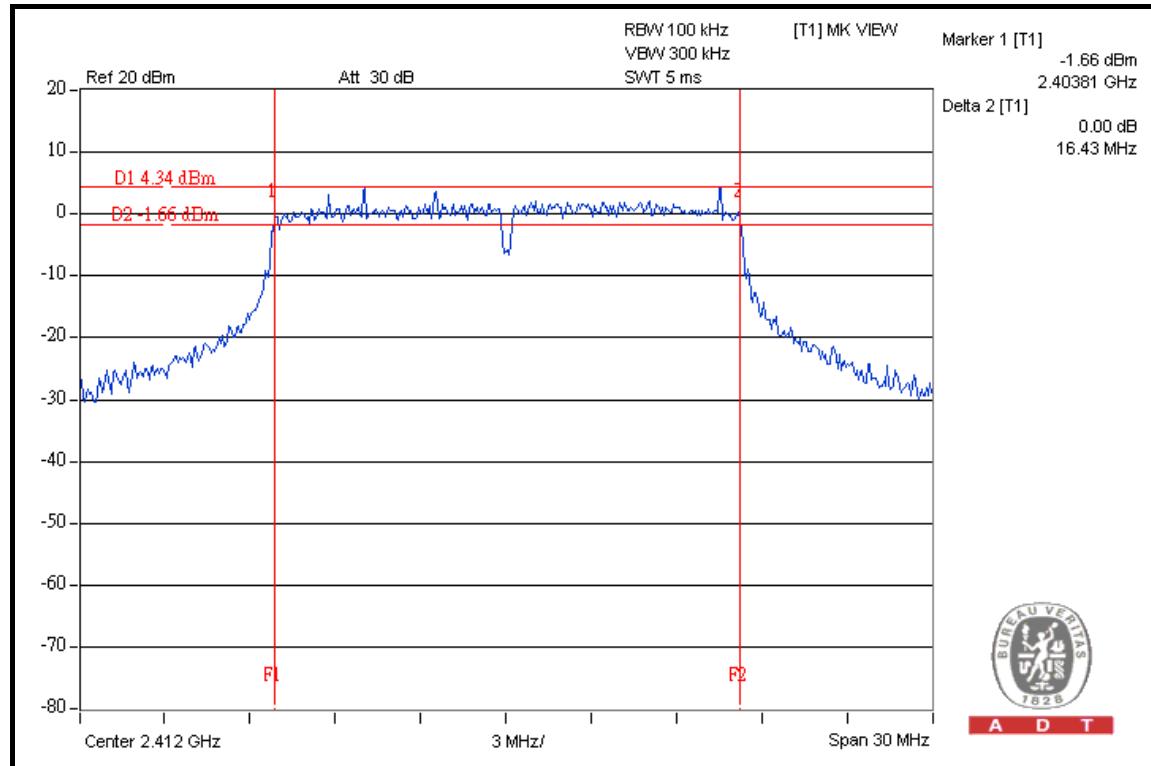




A D T

### CH 6

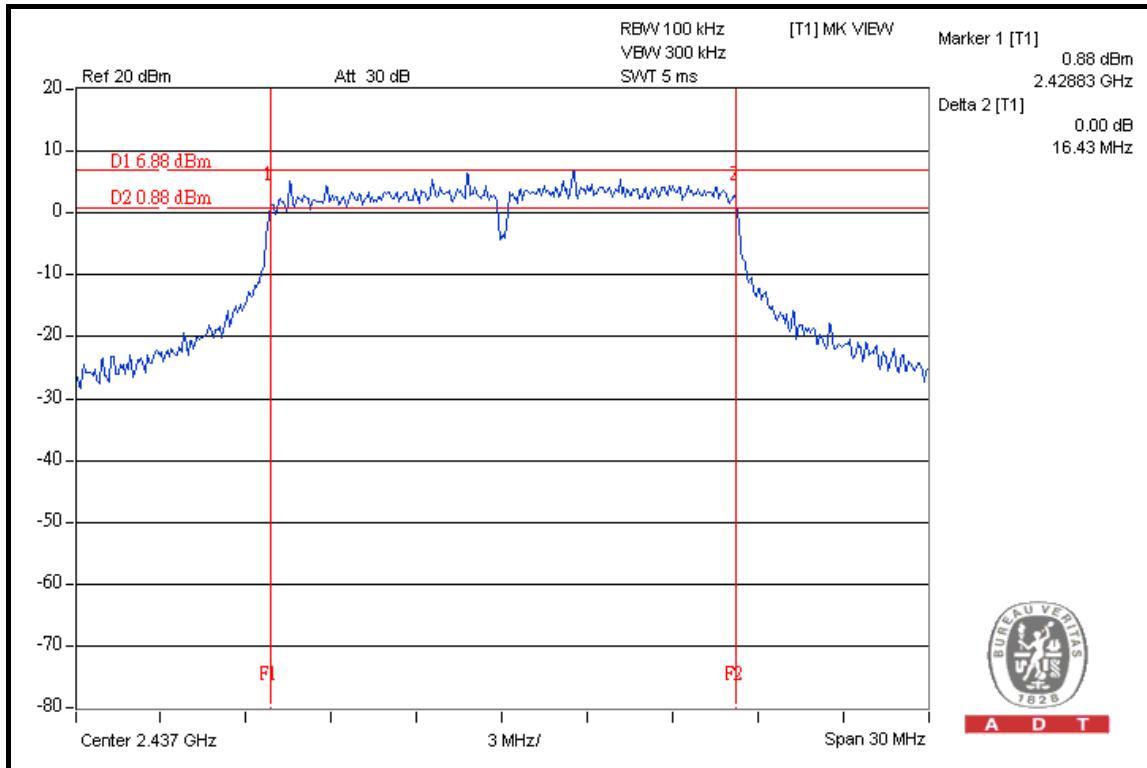

### CH 11

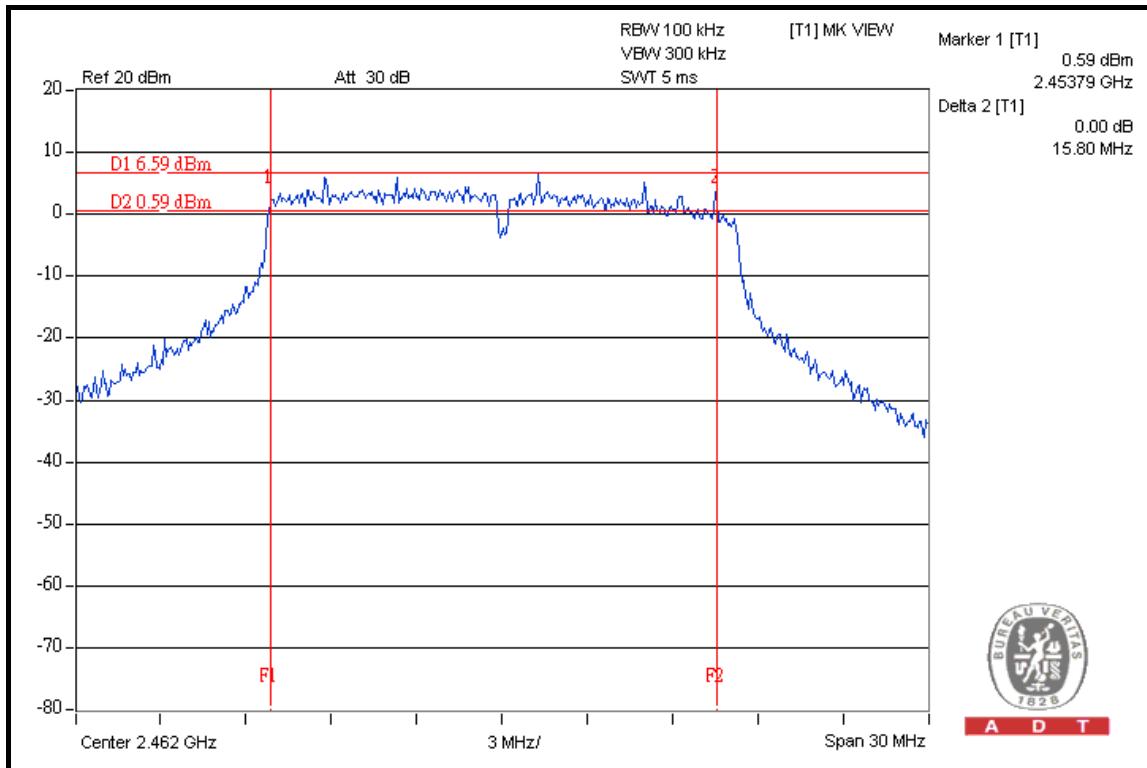




A D T

## 802.11g OFDM MODULATION (TURBO MODE)

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1005hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	28.92	0.5	PASS

## CH 6

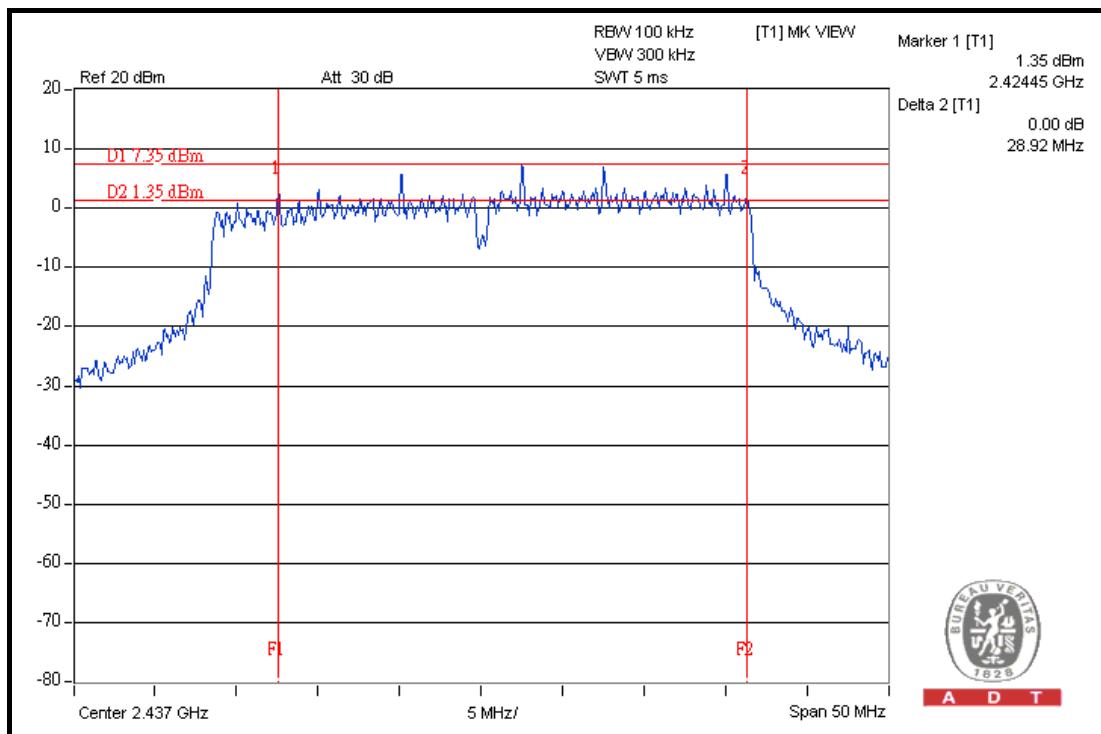



A D T

## 4.4 MAXIMUM PEAK OUTPUT POWER

### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
High Speed Peak Power Meter	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
Power Sensor	MA2411B	0738138	Aug. 04, 2008	Aug. 03, 2009

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


### 4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.5 TEST SETUP

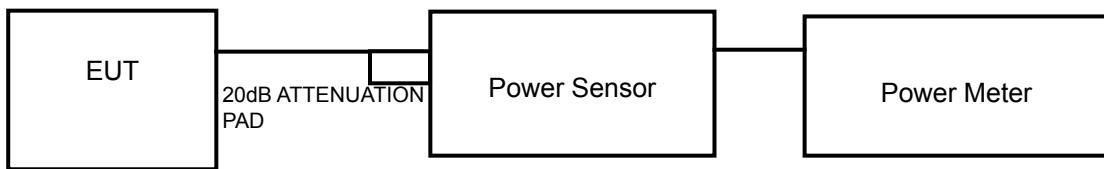

#### 4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.



A D T

#### 4.4.7 TEST RESULTS

##### 802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	141.906	21.52	30	PASS
6	2437	142.561	21.54	30	PASS
11	2462	113.763	20.56	30	PASS

##### 802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	283.792	24.53	30	PASS
6	2437	505.825	27.04	30	PASS
11	2462	452.898	26.56	30	PASS

##### 802.11g OFDM MODULATION (TURBO MODE)

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	506.991	27.05	30	PASS



A D T

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 04, 2008	Jul. 03, 2009

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6.



A D T


#### 4.5.7 TEST RESULTS

##### 802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-3.25	8	PASS
6	2437	-3.40	8	PASS
11	2462	-4.40	8	PASS


##### CH 1

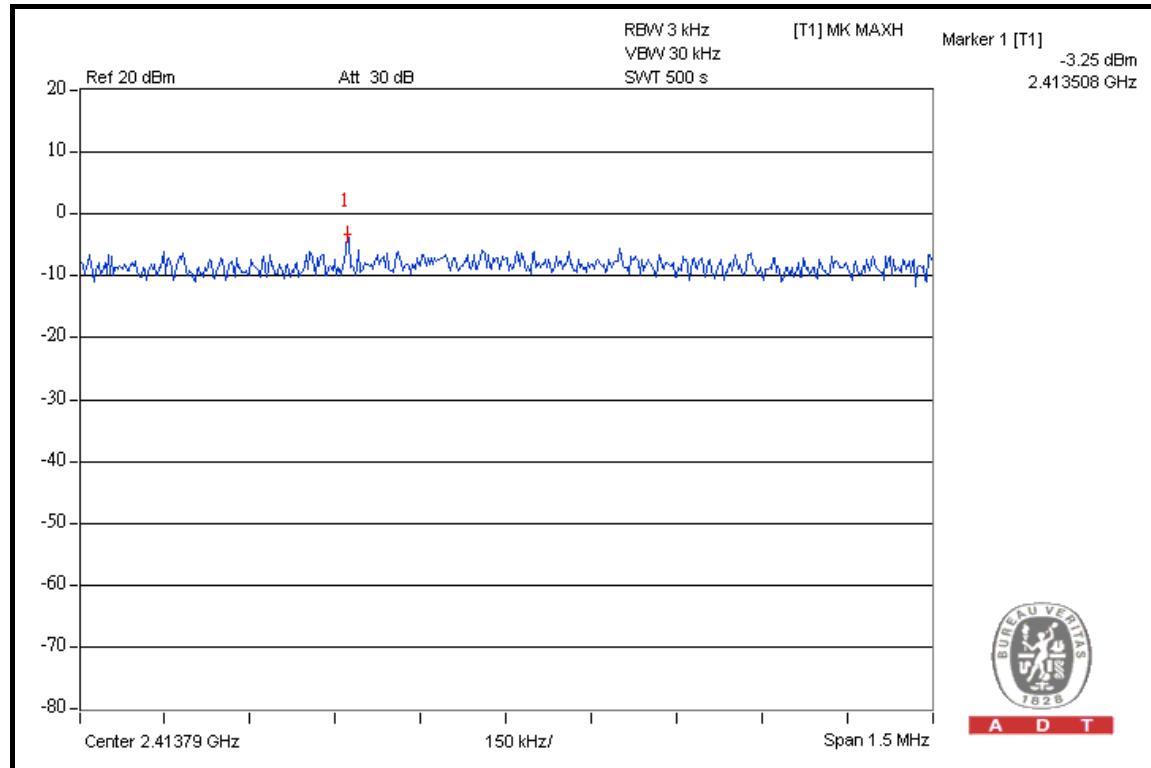




A D T

### CH 6

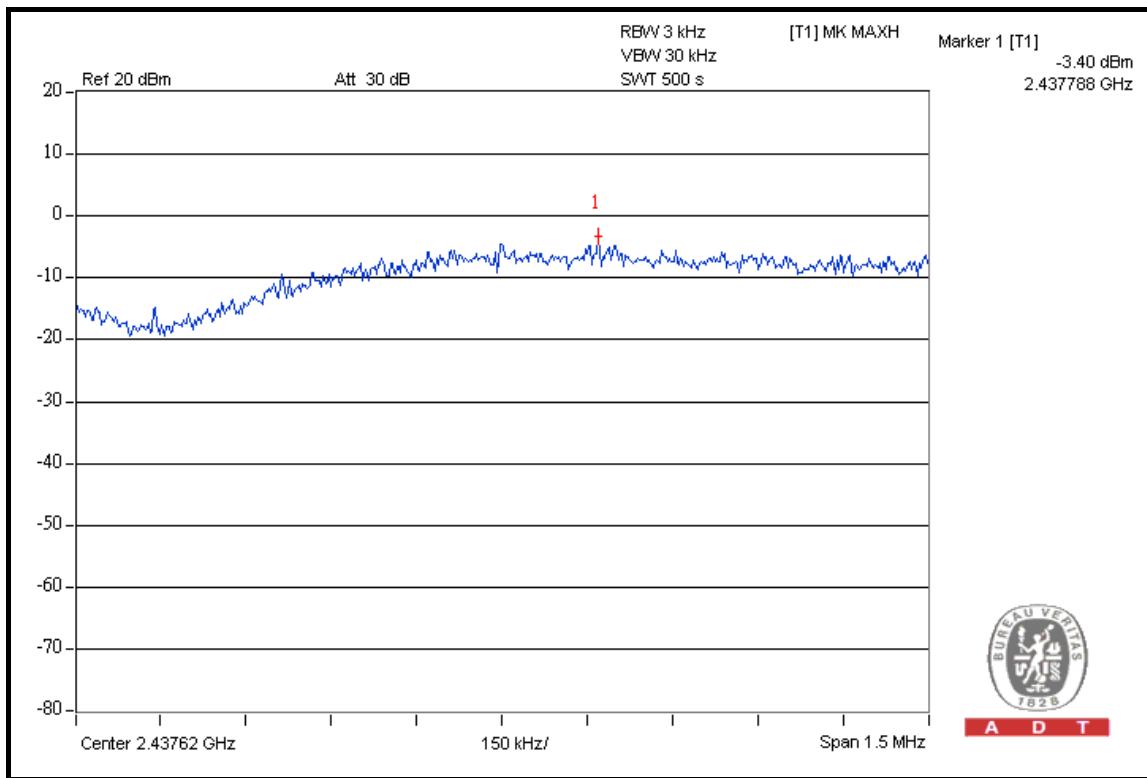

### CH 11

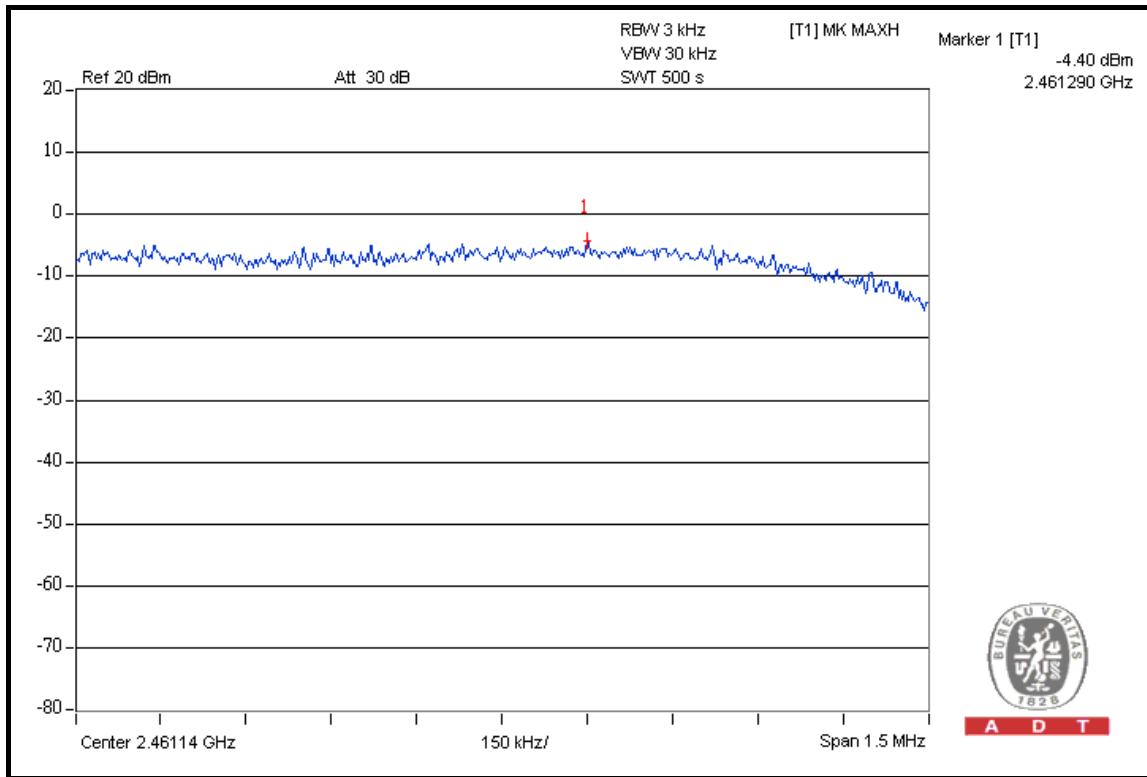




A D T

## 802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.90	8	PASS
6	2437	-6.46	8	PASS
11	2462	-7.00	8	PASS


## CH 1

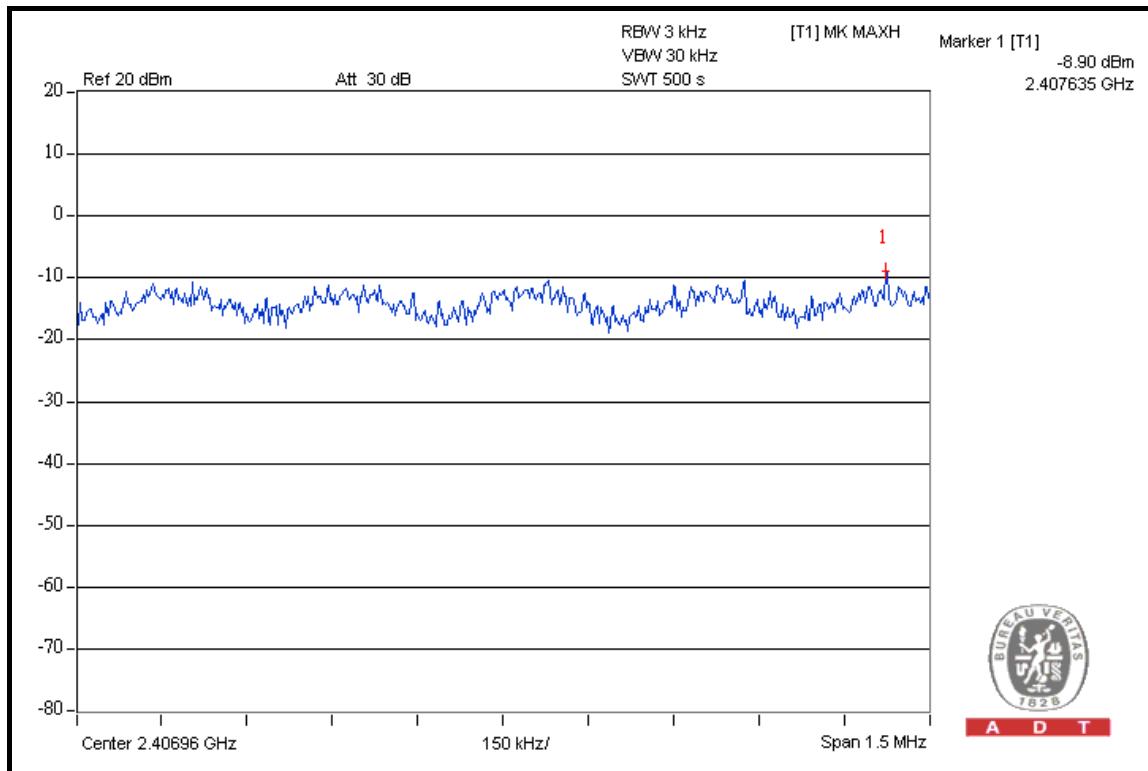




A D T

### CH 6

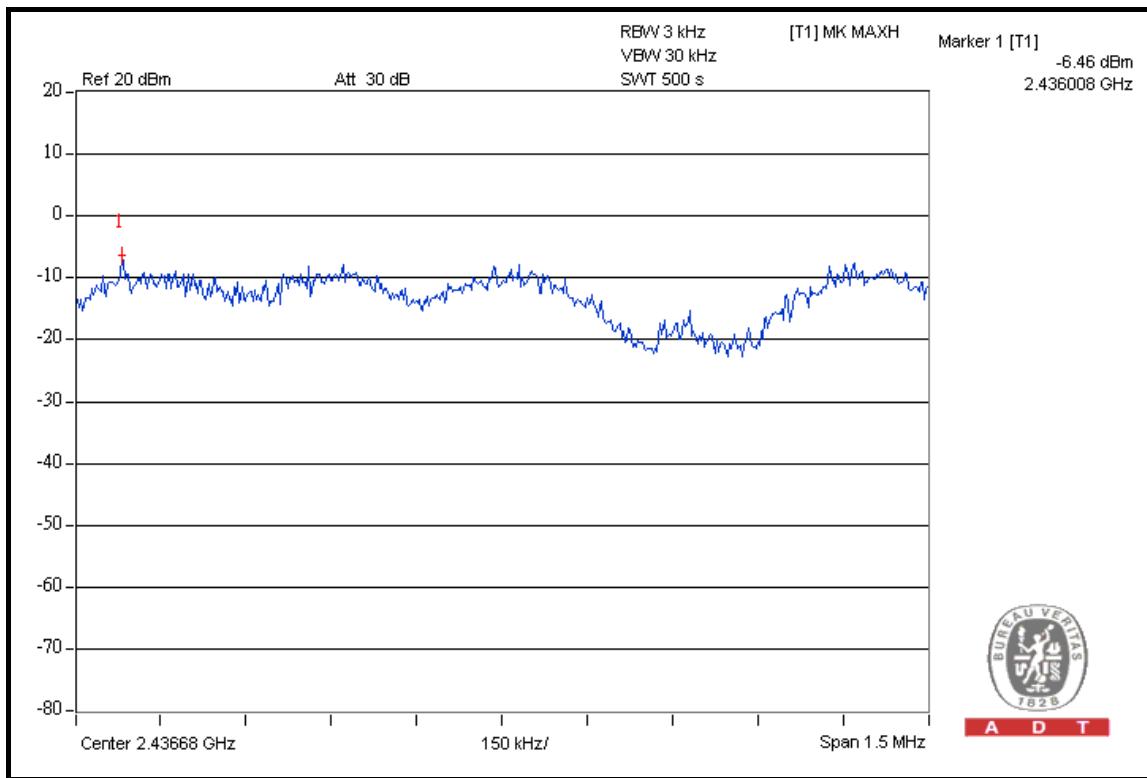

### CH 11

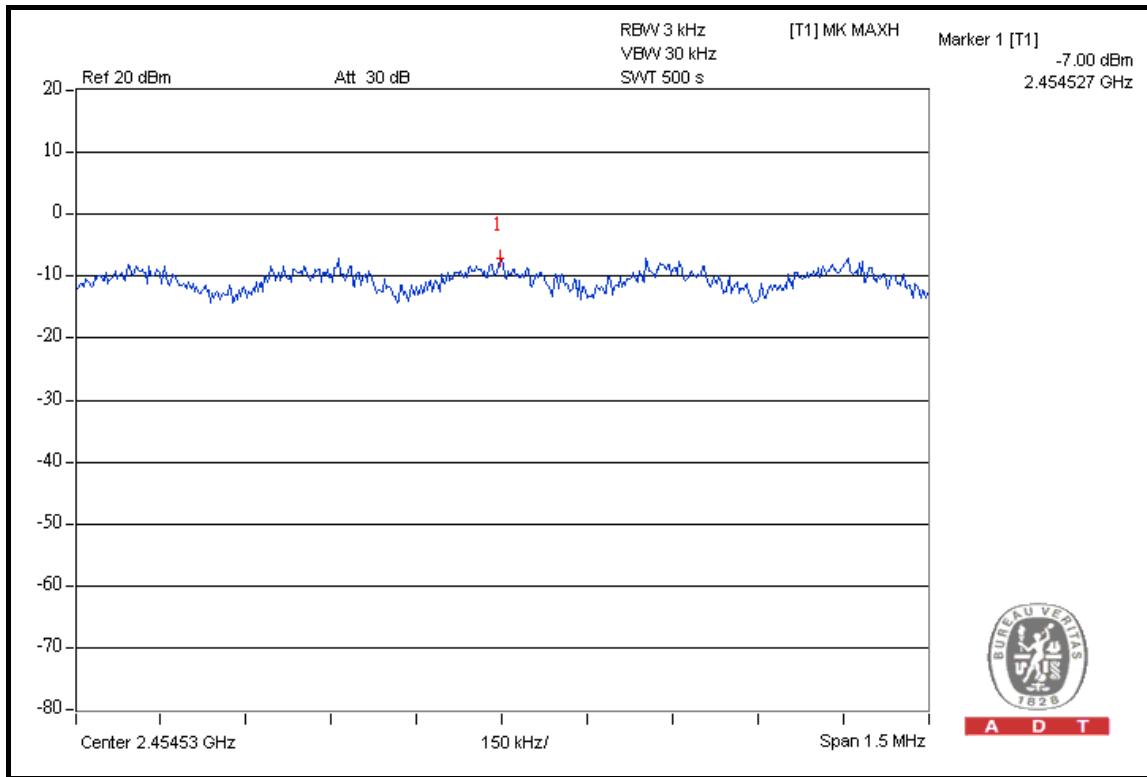




A D T

## 802.11g OFDM MODULATION (TURBO MODE)

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 1013hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-9.24	8	PASS

## CH 6

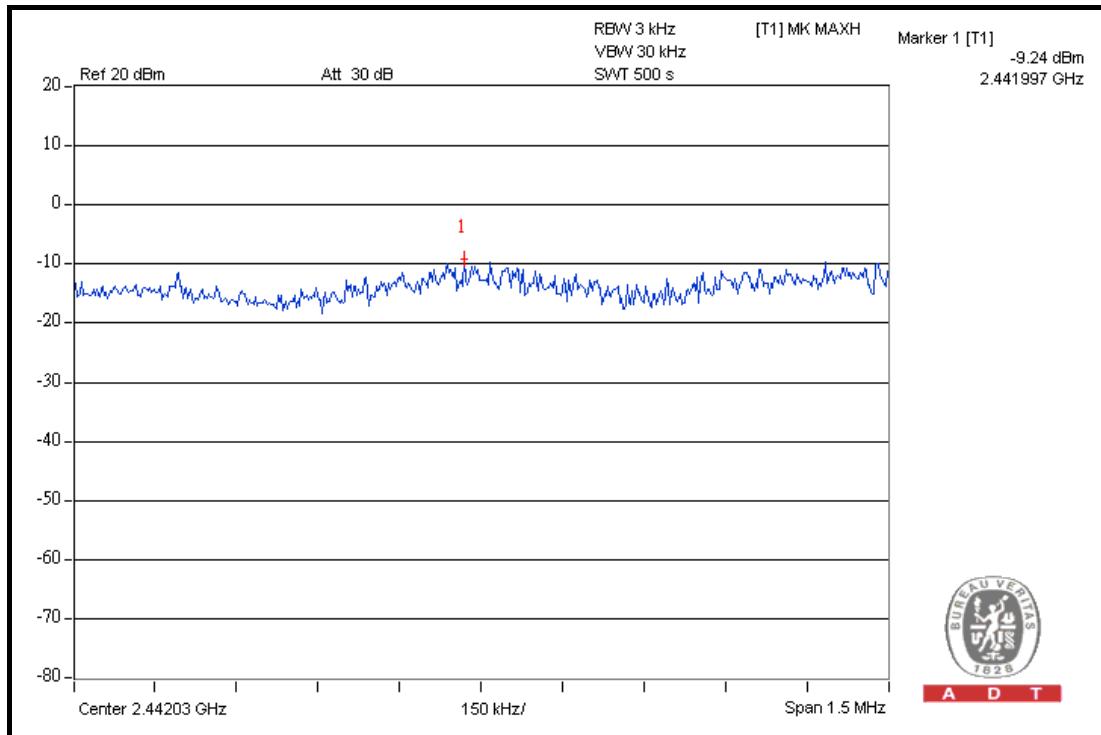



A D T

## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER	FSP 40	100040	Jul. 04, 2008	Jul. 03, 2009

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=100kHz, VBW=300kHz; Average RBW=1MHz, VBW= 10Hz are attached on the following pages.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.6.5 EUT OPERATING CONDITION

Same as 4.3.6.



#### 4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

##### 802.11b DSSS MODULATION

**NOTE 1:** The band edge emission plot on the next page shows 57.13dBc between carrier maximum power and local maximum emission in restrict band (2.38580GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 114.59dBuV/m (Peak), so the maximum field strength in restrict band is  $114.59 - 57.13 = 57.46$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 61.03dBc between carrier maximum power and local maximum emission in restrict band (2.38380GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 109.31dBuV/m (Average), so the maximum field strength in restrict band is  $109.31 - 61.03 = 48.28$ dBuV/m which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on the next second page shows 56.40dBc between carrier maximum power and local maximum emission in restrict band (2.48760GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 114.80dBuV/m (Peak), so the maximum field strength in restrict band is  $114.80 - 56.40 = 58.40$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 61.53dBc between carrier maximum power and local maximum emission in restrict band (2.48880GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 109.75dBuV/m (Average), so the maximum field strength in restrict band is  $109.75 - 61.53 = 48.22$ dBuV/m which is under 54dBuV/m limit.





A D T

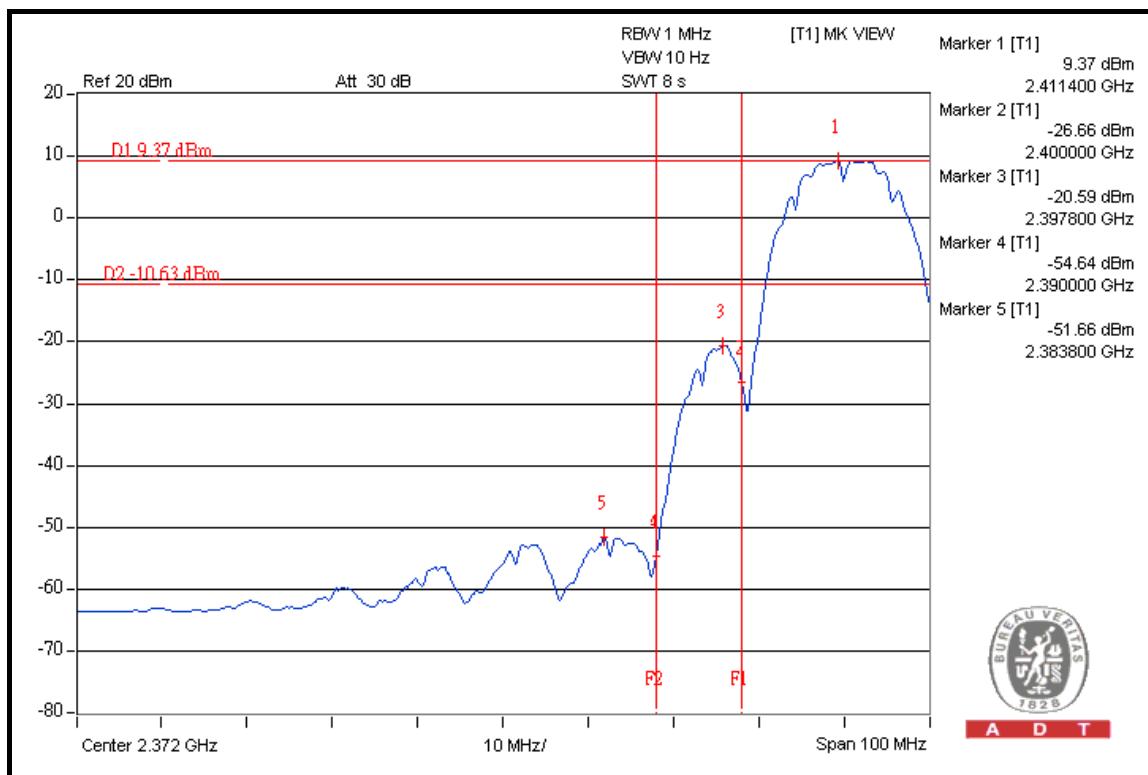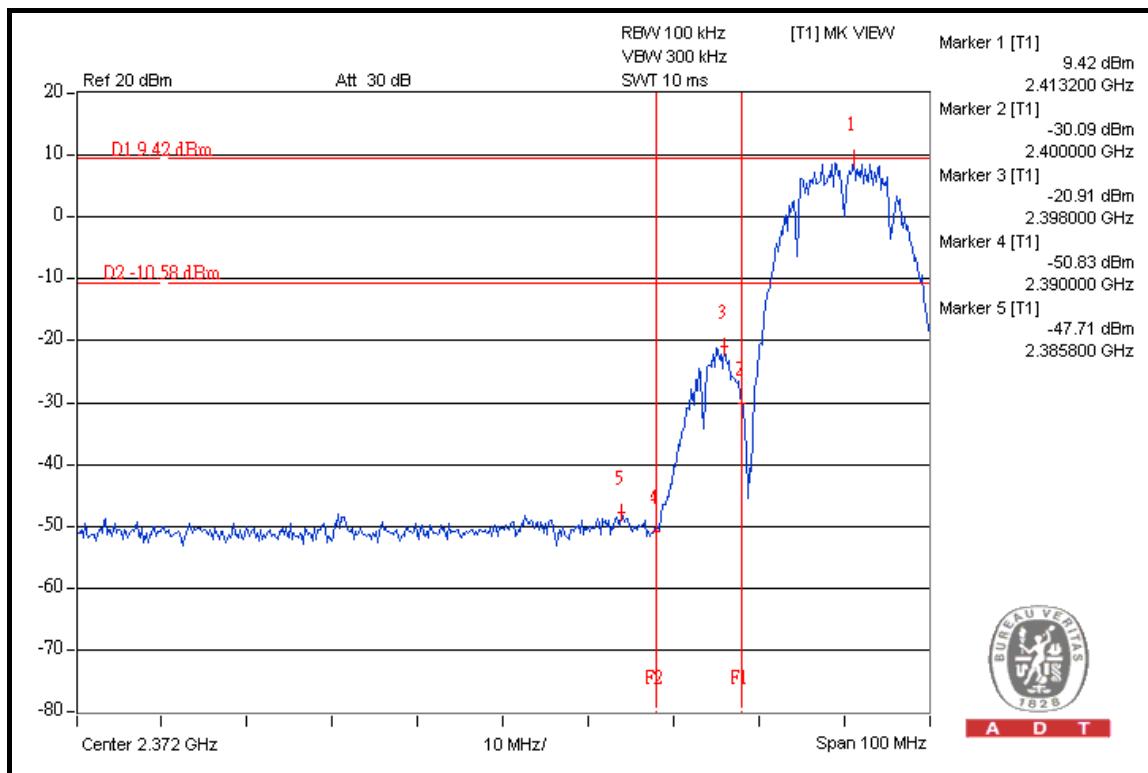





A D T

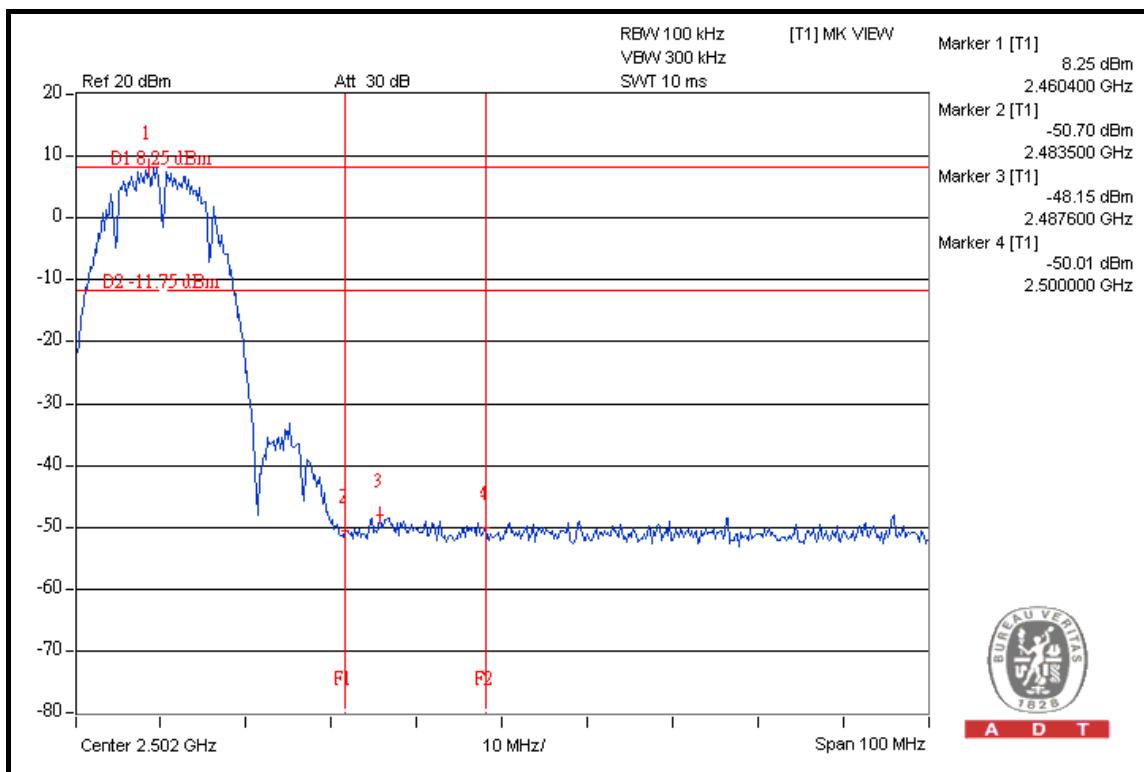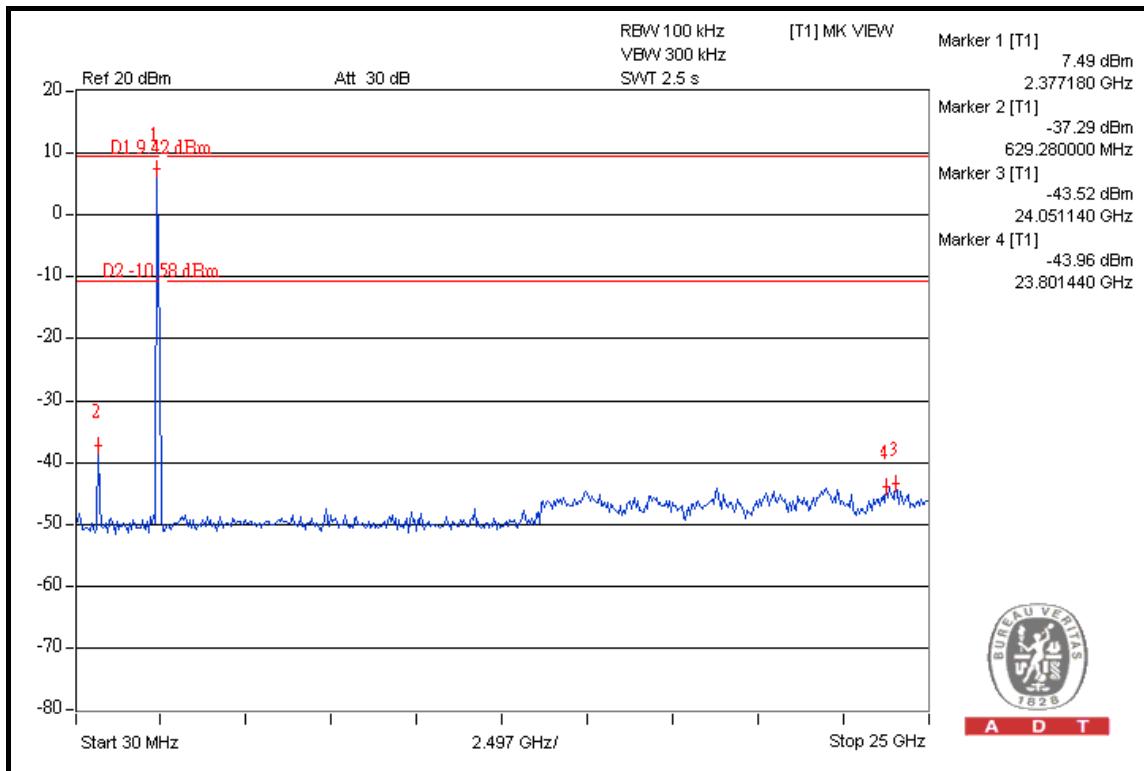



A D T

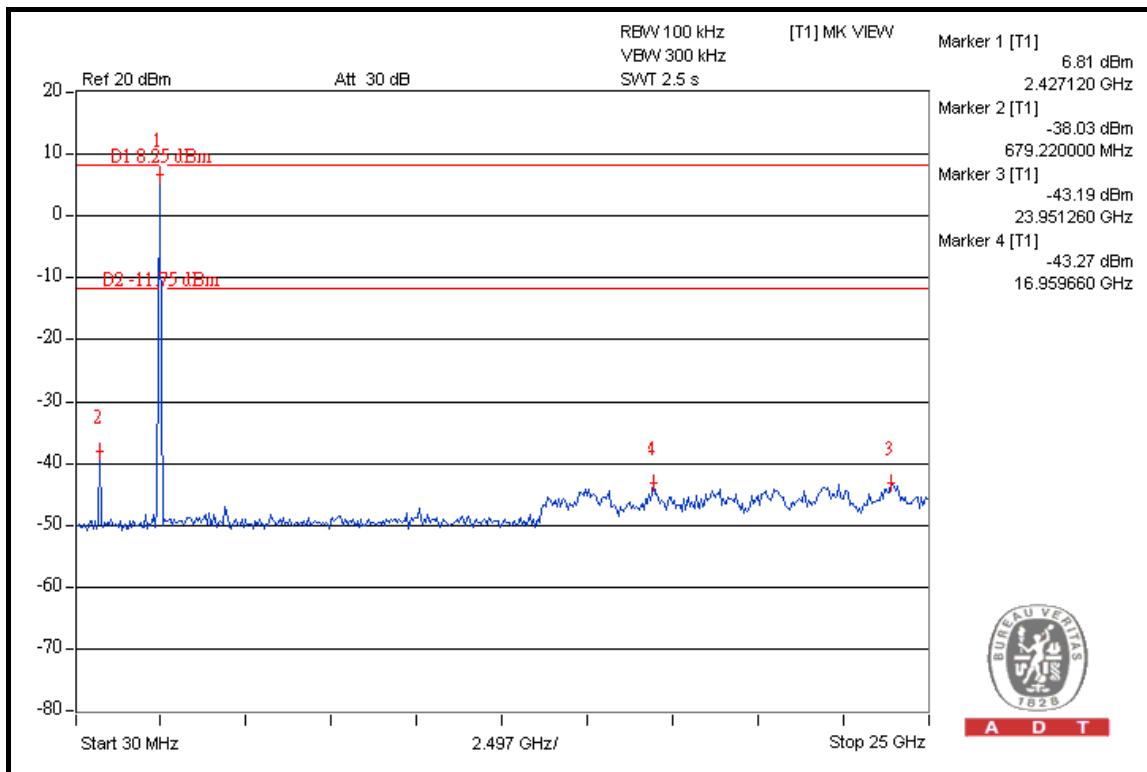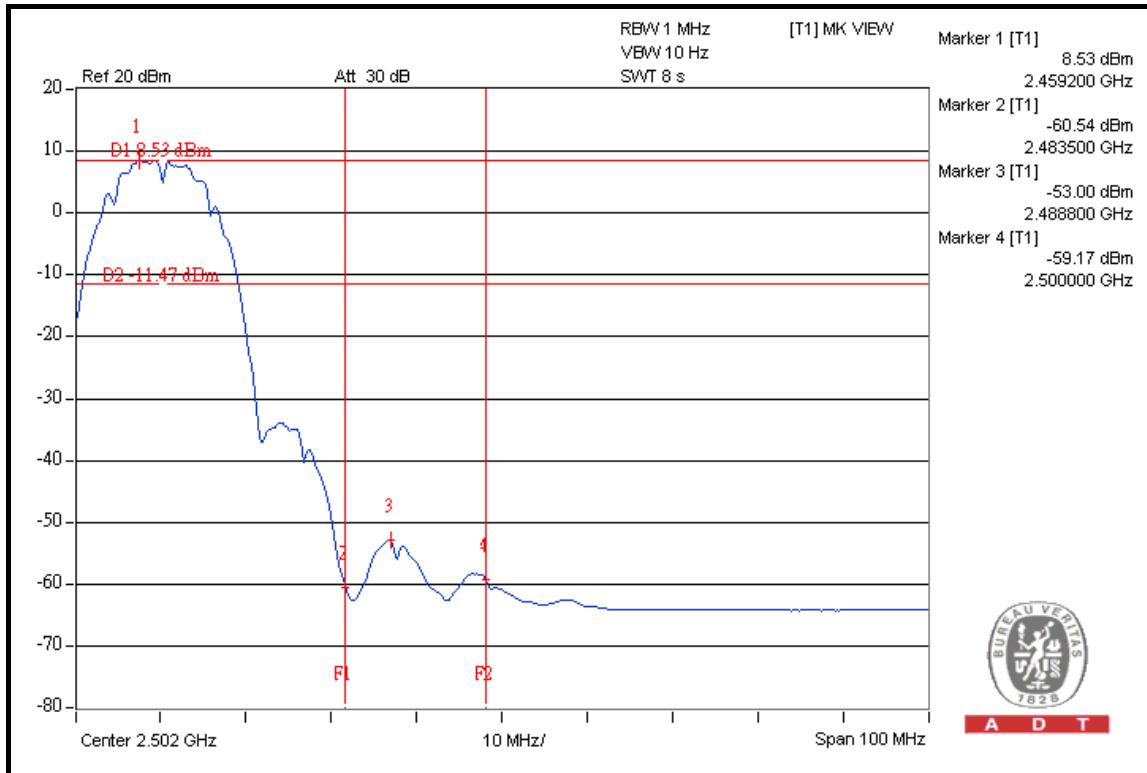



A D T

## 802.11g OFDM MODULATION

**NOTE 1:** The band edge emission plot on the next page shows 51.38dBc between carrier maximum power and local maximum emission in restrict band (2.33600GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 116.17dBuV/m (Peak), so the maximum field strength in restrict band is  $116.17 - 51.38 = 64.79$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 53.36dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 104.96dBuV/m (Average), so the maximum field strength in restrict band is  $104.96 - 53.36 = 51.60$ dBuV/m which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on the next second page shows 54.20dBc between carrier maximum power and local maximum emission in restrict band (2.48700GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 119.31dBuV/m (Peak), so the maximum field strength in restrict band is  $119.31 - 54.20 = 65.11$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 61.57dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 107.96dBuV/m (Average), so the maximum field strength in restrict band is  $107.96 - 61.57 = 46.39$ dBuV/m which is under 54dBuV/m limit.





A D T

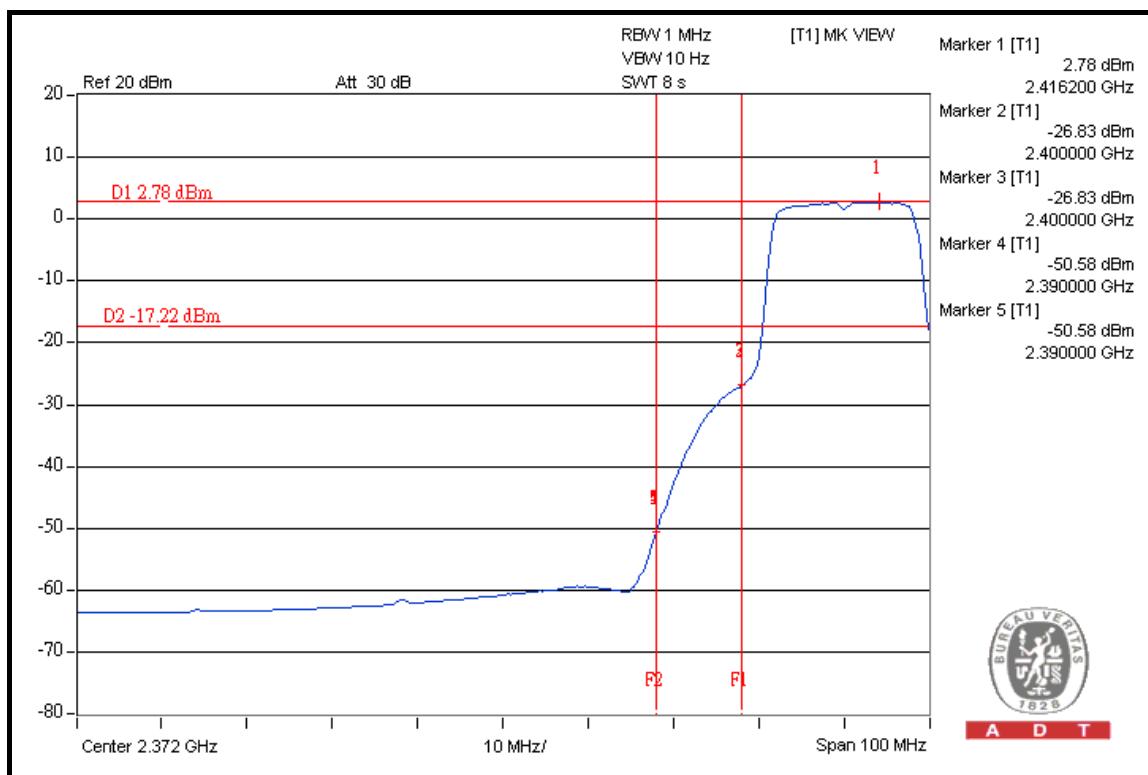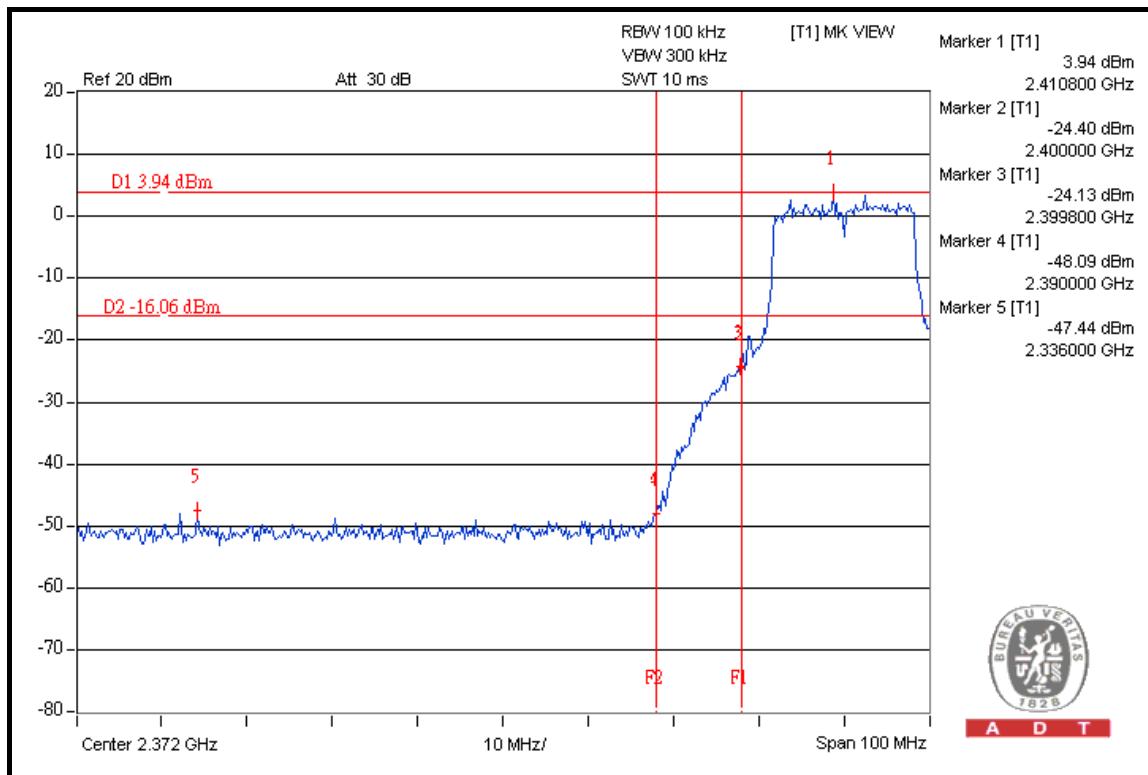





A D T

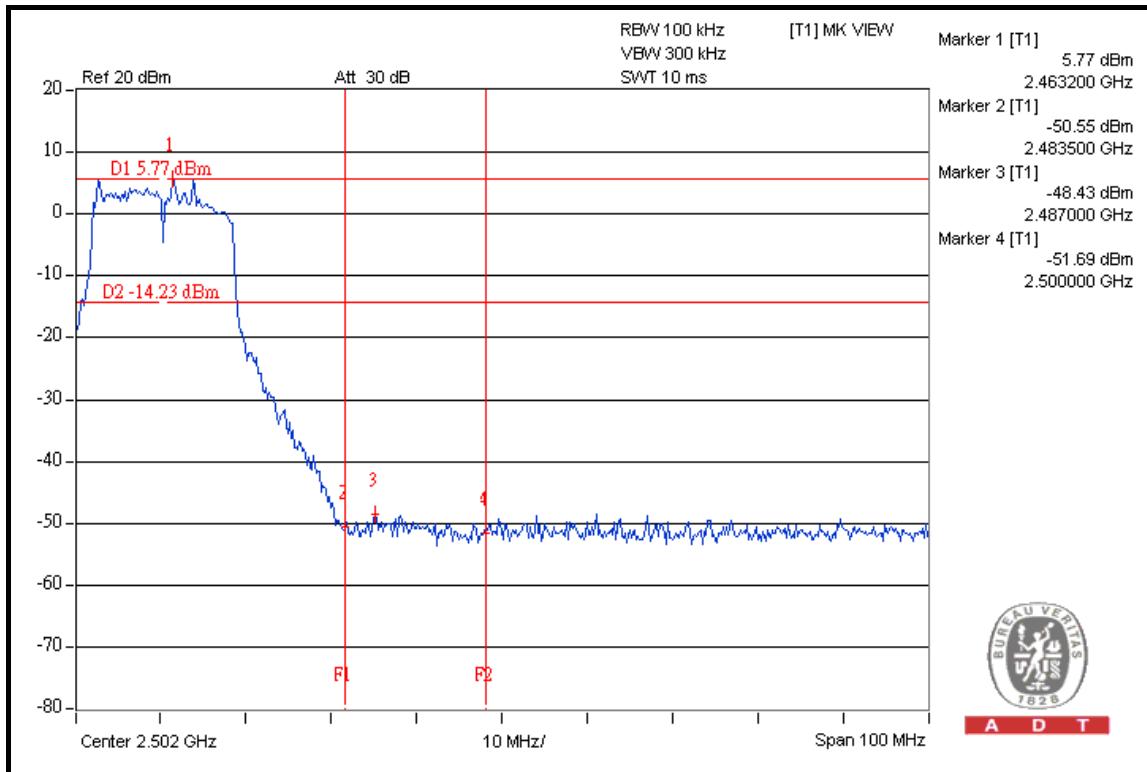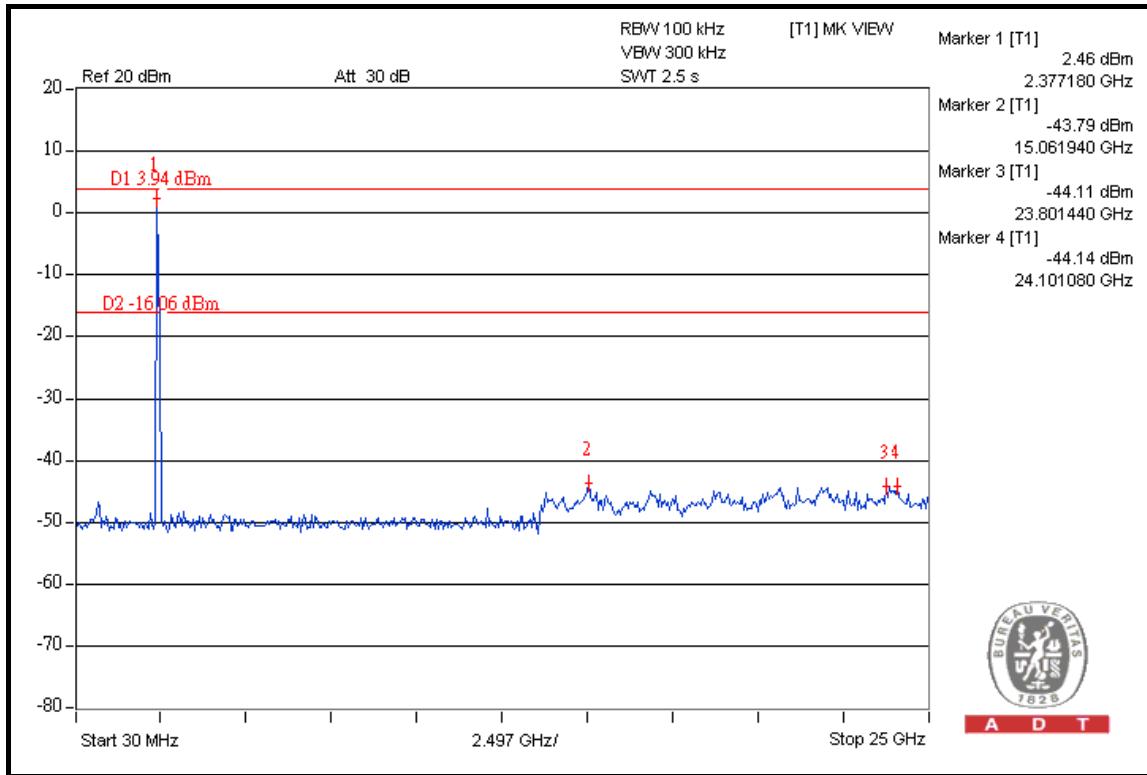



A D T

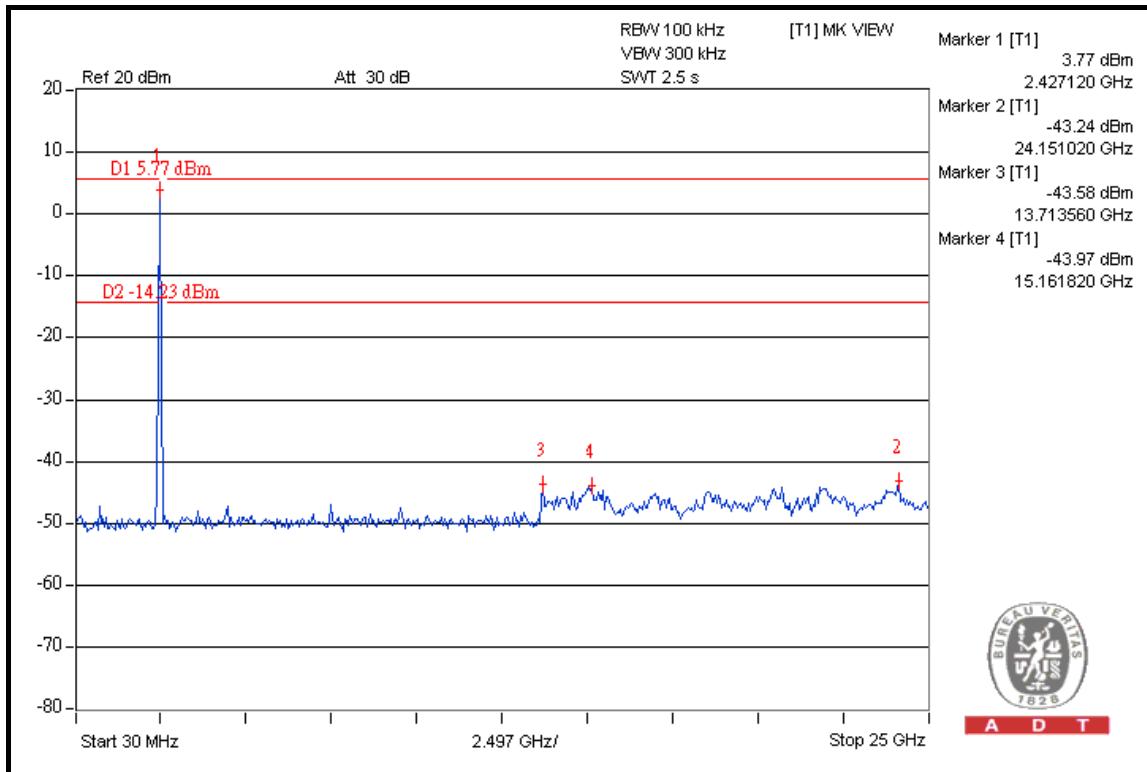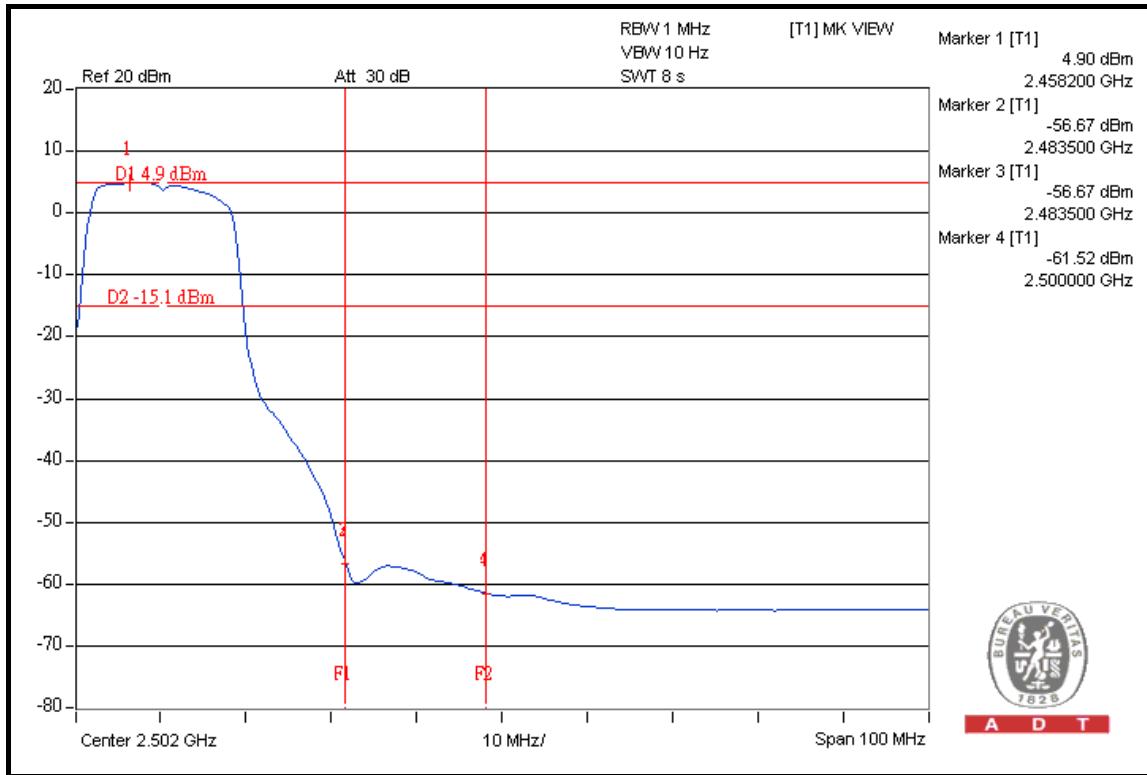



A D T

## 802.11g OFDM MODULATION (TURBO MODE)

**NOTE 1:** The band edge emission plot on the next page shows 57.75dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 114.13dBuV/m (Peak), so the maximum field strength in restrict band is  $114.13 - 57.75 = 56.38$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 58.63dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 105.29dBuV/m (Average), so the maximum field strength in restrict band is  $105.29 - 58.63 = 46.66$ dBuV/m which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on the next second page shows 56.39dBc between carrier maximum power and local maximum emission in restrict band (2.49080GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 103.99dBuV/m (Peak), so the maximum field strength in restrict band is  $114.13 - 56.39 = 57.74$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 58.53dBc between carrier maximum power and local maximum emission in restrict band (2.49000GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 105.29dBuV/m (Average), so the maximum field strength in restrict band is  $105.29 - 58.53 = 46.76$ dBuV/m which is under 54dBuV/m limit.





A D T

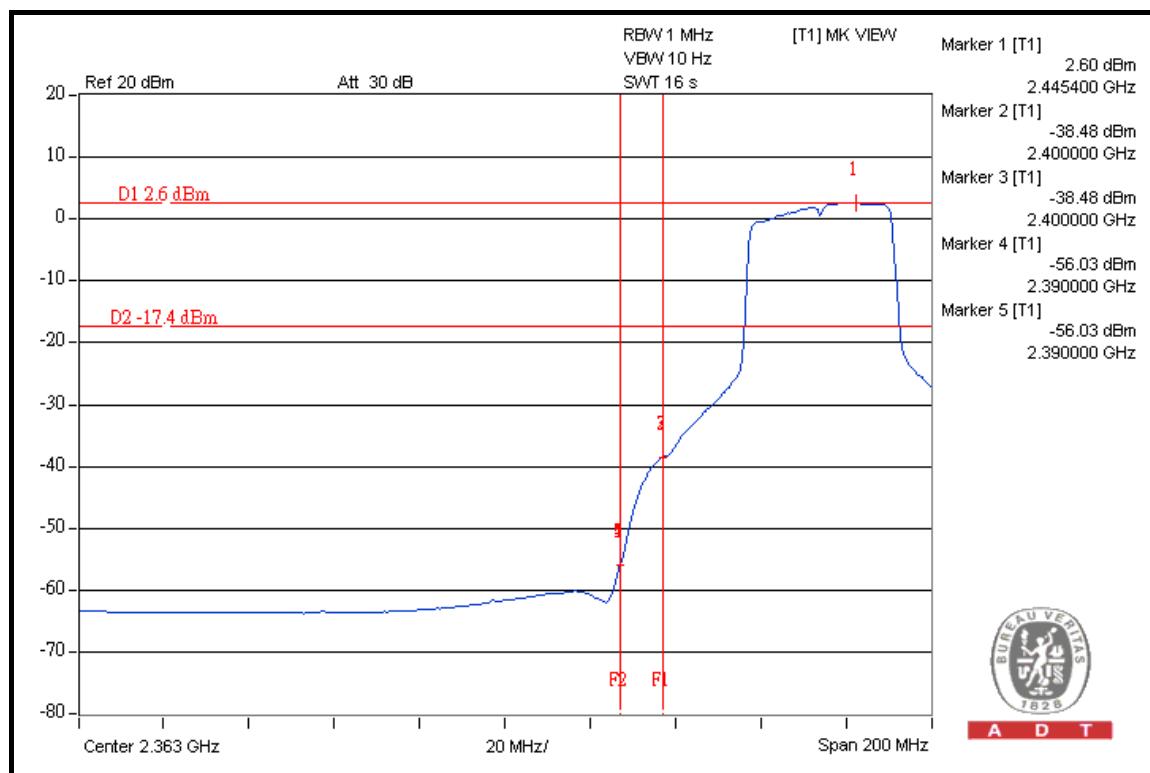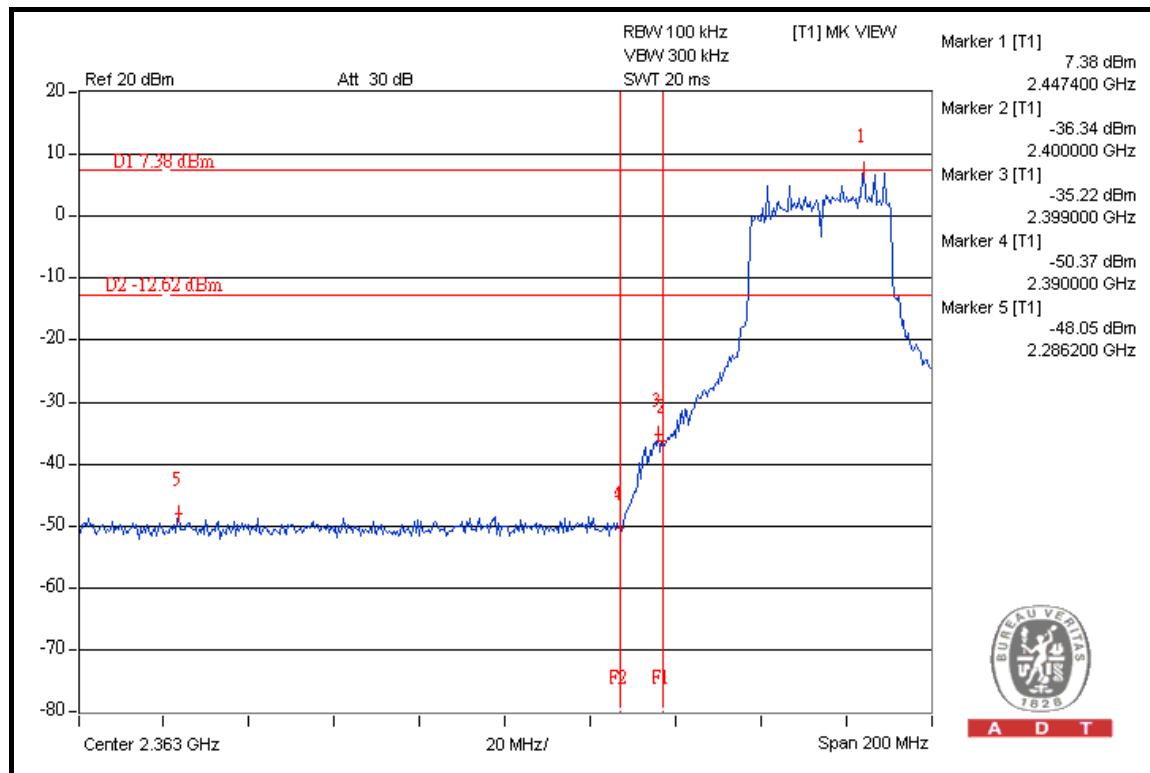





A D T

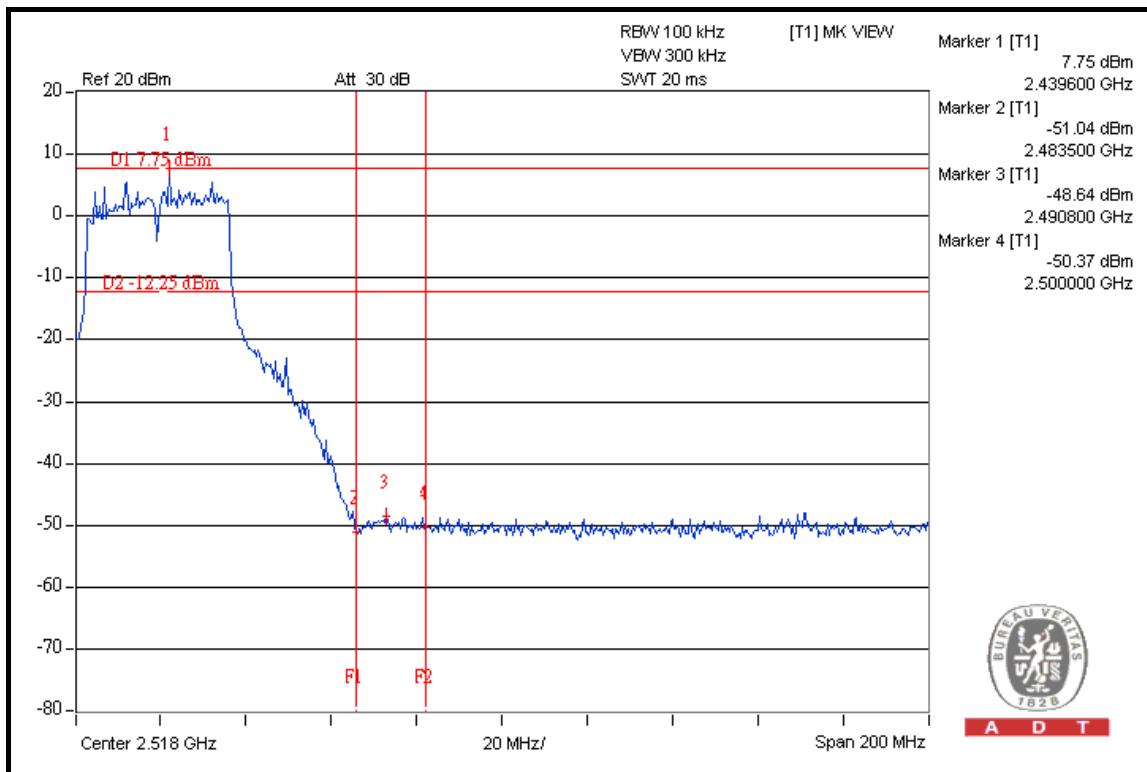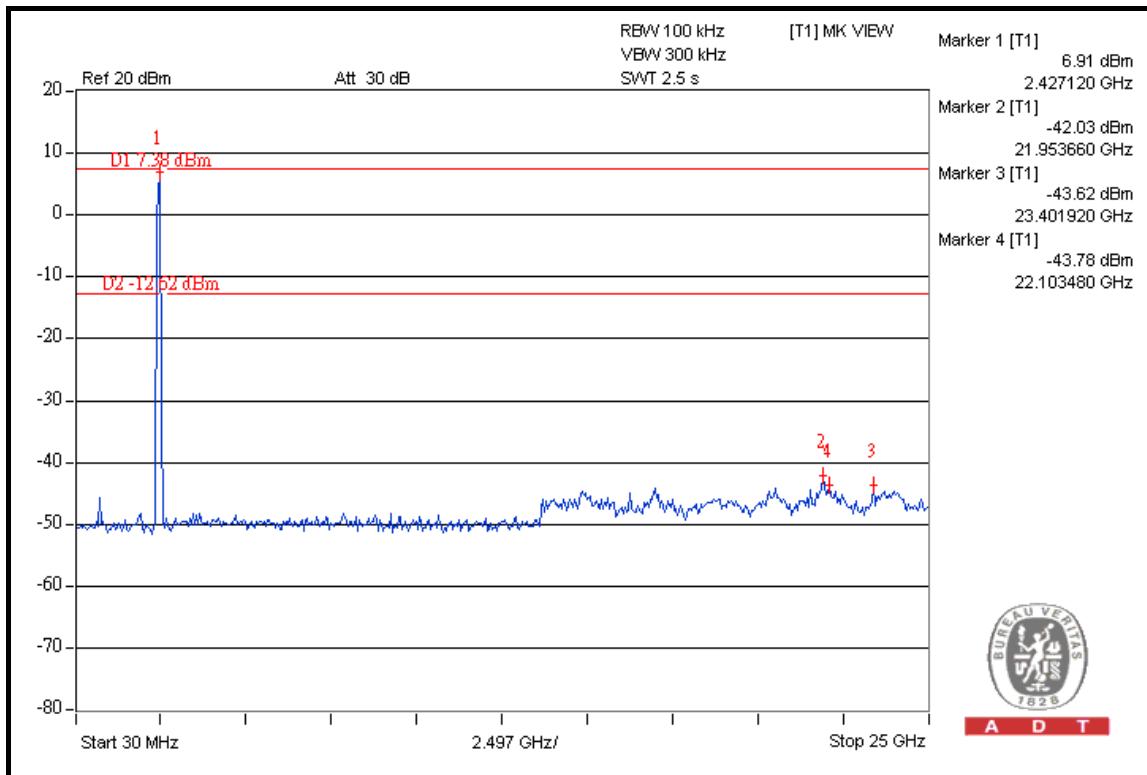



A D T

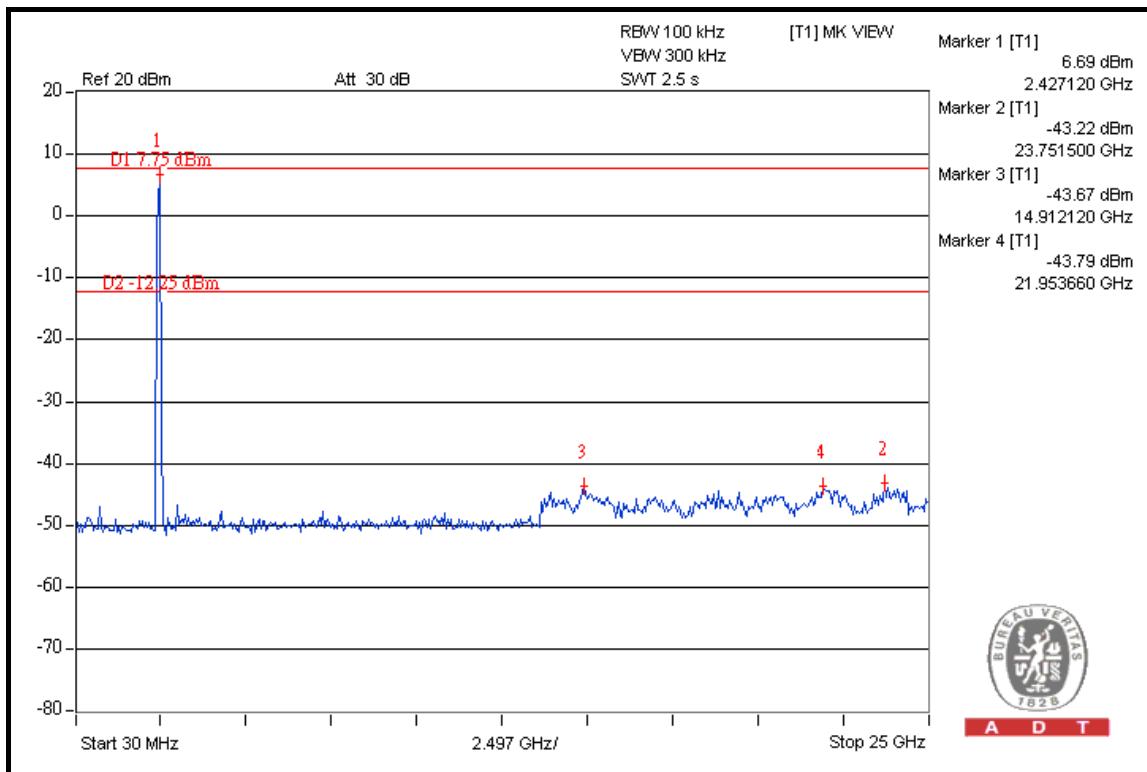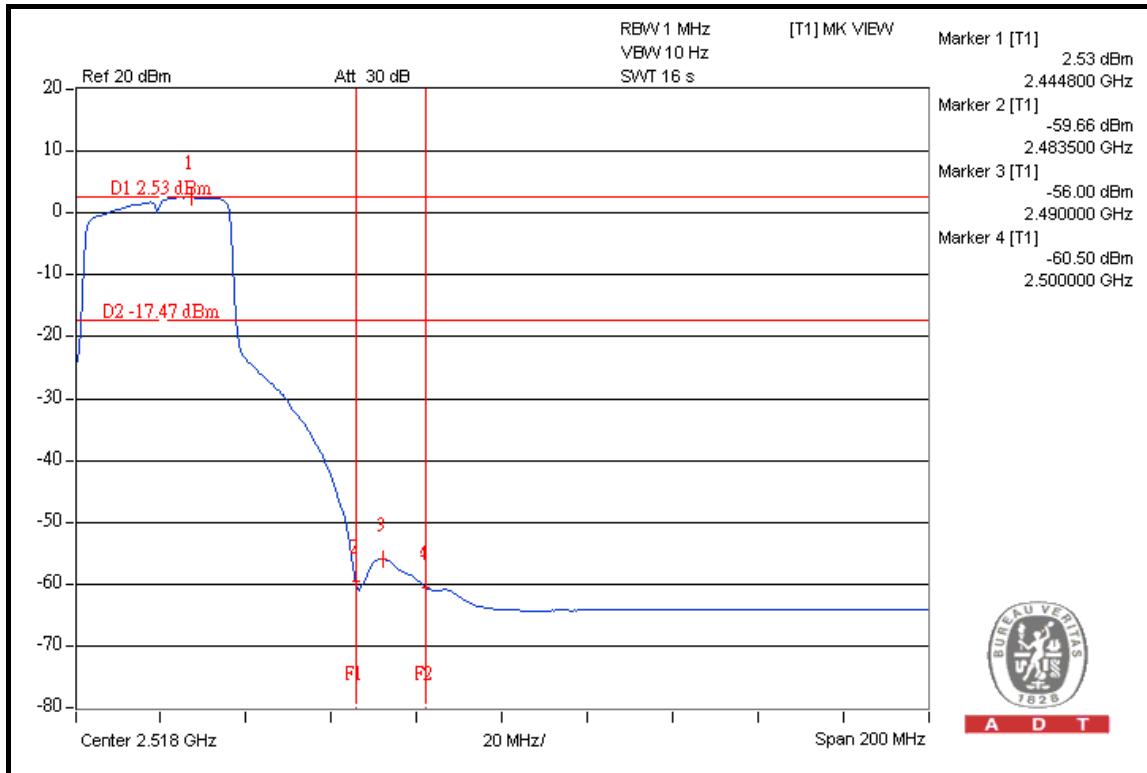



A D T

## 4.7 ANTENNA REQUIREMENT

### 4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is dipole antenna with R-TNC connector. The maximum Gain of the antenna is 5dBi.



A D T

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	TAF, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**

Tel: 886-3-3183232  
Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



A D T

## 7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---