



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Senao Networks Inc.
Applicant Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan
FCC ID	U2M-IAP8250AG
Manufacturer's company	Senao Networks Inc.
Manufacturer Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan

Product Name	Indoor Wireless Access Point
Brand Name	SENAO
Model No.	IAP8250AG & IAP8251AG & EWS370AP & EWS371AP
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Oct. 15, 2015
Final Test Date	Mar. 02, 2016
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r02, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	8
3.5. Table for Test Modes	9
3.6. Table for Testing Locations.....	11
3.7. Table for Multiple Listing.....	11
3.8. Table for Supporting Units	12
3.9. Table for Parameters of Test Software Setting	13
3.10. EUT Operation during Test	14
3.11. Duty Cycle	14
3.12. Test Configurations	15
4. TEST RESULT	18
4.1. AC Power Line Conducted Emissions Measurement.....	18
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	22
4.3. 6dB Spectrum Bandwidth Measurement	43
4.4. Maximum Conducted Output Power Measurement.....	50
4.5. Power Spectral Density Measurement	54
4.6. Radiated Emissions Measurement	70
4.7. Band Edge Emissions Measurement	113
4.8. Frequency Stability Measurement	129
4.9. Antenna Requirements	143
5. LIST OF MEASURING EQUIPMENTS	144
6. MEASUREMENT UNCERTAINTY.....	146
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR541527AB	Rev. 01	Initial issue of report	May 24, 2016
FR541527AB	Rev. 02	Adding two model names: EWS370AP, EWS371AP	Jun. 07, 2016

1. VERIFICATION OF COMPLIANCE

Product Name : Indoor Wireless Access Point
Brand Name : SENAO
Model No. : IAP8250AG & IAP8251AG & EWS370AP & EWS371AP
Applicant : Senao Networks Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 15, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	14.86 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	1.18 dB
4.5	15.407(a)	Power Spectral Density	Complies	0.06 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.02 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.05 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter or PoE
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi Band 1: IEEE 802.11a: 16.93 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 17.97 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 35.31 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 74.38 MHz Band 4: IEEE 802.11a: 24.23 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 23.53 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 35.75 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 74.96 MHz Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi Band 1: IEEE 802.11a: 16.32 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 17.28 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 36.47 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 76.12 MHz Band 4: IEEE 802.11a: 29.78 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 26.31 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 36.32 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 75.54 MHz

Maximum Conducted Output Power	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi Band 1: IEEE 802.11a: 25.17 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 25.37 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 26.36 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 17.81 dBm Band 4: IEEE 802.11a: 27.71 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 27.98 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 24.19 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 17.97 dBm Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi Band 1: IEEE 802.11a: 24.51 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 24.18 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 24.55 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 15.68 dBm Band 4: IEEE 802.11a: 27.46 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 28.82 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 24.12 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 16.19 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Communication Mode	☒ IP Based (Load Based) ☐ Frame Based
Operating Mode	☐ Outdoor access point ☒ Indoor access point ☐ Fixed point-to-point access points ☐ Mobile and portable client devices

Antenna and Band width

Antenna	Four (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4
802.11ac (VHT80)	4	MCS 0-9/Nss1-4
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40. Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80 in 5GHz. Note 3: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac		

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Set	Brand Holder	Model Number (Part No.)	Extreme Part No. (Short Description)	Antenna Type	Connector	Polarized Antenna	Gain (dBi)	
							2.4GHz	5GHz
1	Master Wave Technology Co., Ltd.	98152MRSX015	30709 (WS-ANT-2DIP-4)	Dipole Antenna	RP SMA Male	X	4.66	-
2	Master Wave Technology Co., Ltd.	98152URSX009	30710 (WS-ANT-5DIP-4)	Dipole Antenna	RP SMA Male	X	-	4.67
3	Senao Networks, Inc.	AP3935i	-	PIFA Antenna	IPEX	X	Note 1	

Note1:

Set	Antenna Gain (dBi)							
	2.4GHz				5GHz			
	Chain 1	Chain 2	Chain 3	Chain 4	Chain 1	Chain 2	Chain 3	Chain 4
3	3.81	3.75	3.98	3.47	5.84	5.50	5.84	5.65

Note2:

The EUT has three sets of antennas.

<For 2.4GHz Function>

For IEEE 802.11b/g/n/ac mode (4TX, 4RX):


Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

<For 5GHz Function>


For IEEE 802.11a/n/ac mode (4TX, 4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

For EUT 1:

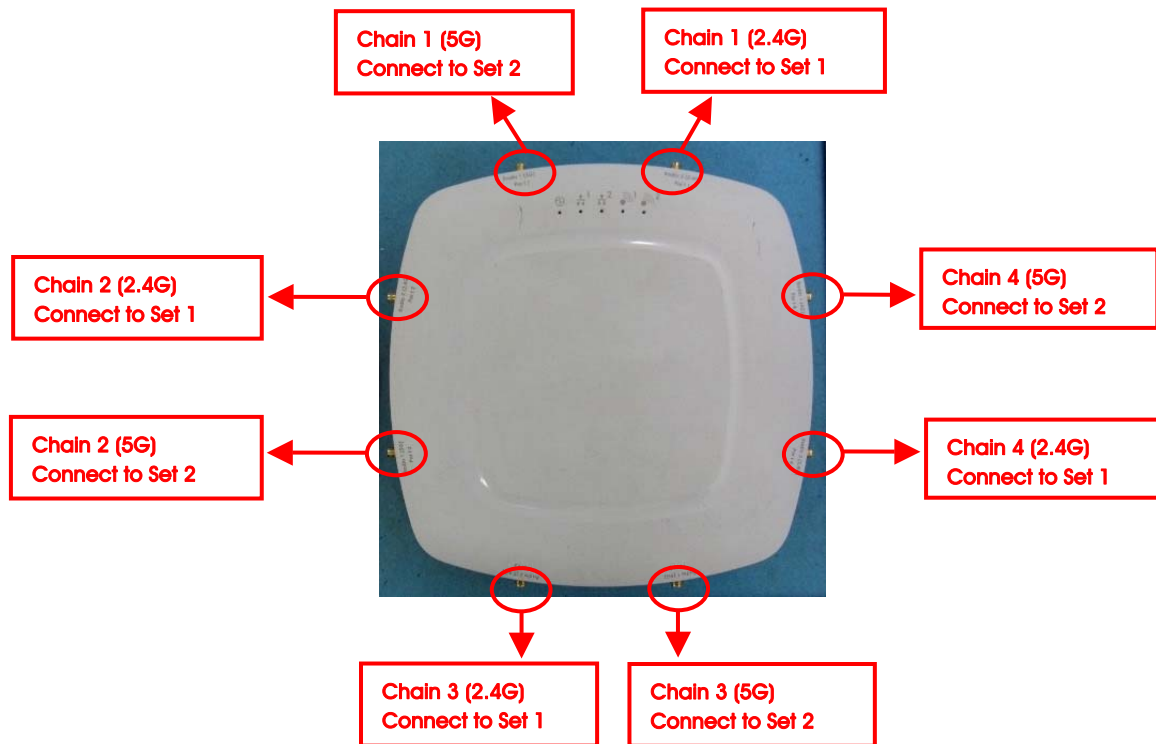

For EUT 2:

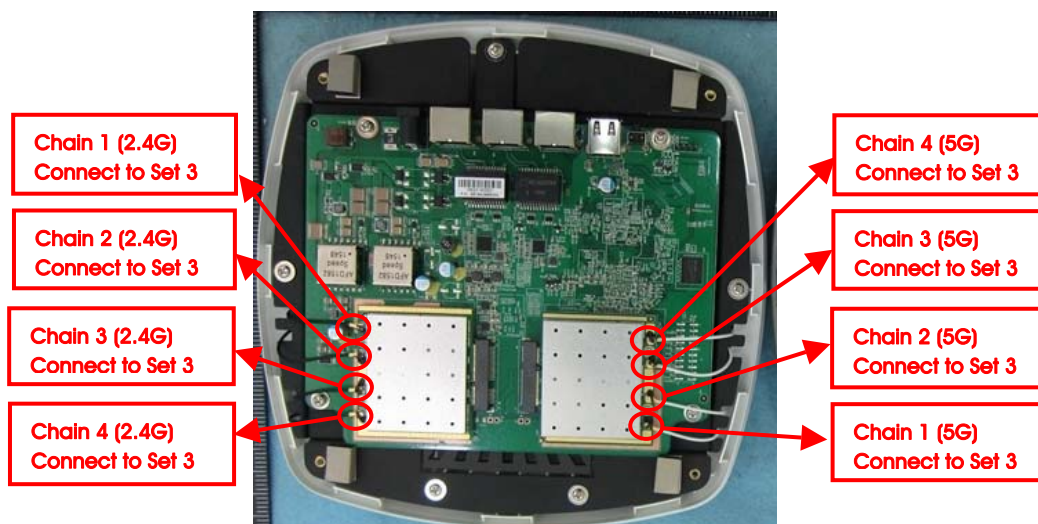

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	1+2+3+4
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	1+2+3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2+3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2+3+4
Power Spectral Density	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	1+2+3+4
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	1+2+3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2+3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2+3+4
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	1+2+3+4
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	1+2+3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2+3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2+3+4
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	1+2+3+4
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	Band 4	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	Band 4	MCS0/Nss1	155	1+2+3+4
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	1+2+3+4
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	1+2+3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2+3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2+3+4

Band Edge Emission	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157/165	1+2+3+4
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/157/165	1+2+3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2+3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2+3+4
Frequency Stability	20 MHz	Band 1&4	-	40/157	3, 4
	40 MHz	Band 1&4	-	38/151	3, 4
	80 MHz	Band 1&4	-	42/155	3, 4

Note1: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

Note2:

The adapter and PoE are for measurement only, would not be marketed.

The adapter and PoE information as below:

Power	Brand	Model
Adapter	Powertron Electronics Corp.	PA1024-120HUB200
PoE	Microsemi	PD-9001GR/AC

Note3: All the specification of test configurations and test modes were based on customer's request.

Note4: The console port can not be used by end user. It is generally used for updating FW by professional installer.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link - EUT 1 + Set 1 + Set 2 + Adapter

Mode 2. Normal Link - EUT 2 + Set 3 + Adapter

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission Below 1GHz test:

Mode 1. Place EUT 1 in Y axis + Set 1 + Set 2 + Adapter

Mode 2. Place EUT 1 in Z axis + Set 1 + Set 2 + Adapter

Mode 2 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3~5 will follow this same test mode.

Mode 3. Place EUT 1 in Z axis + Set 1 + Set 2 + PoE

Mode 4. Place EUT 2 in Z axis + Set 3 + Adapter

Mode 5. Place EUT 2 in Z axis + Set 3 + PoE

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission Above 1GHz test:

The EUT 1 was performed at Y axis and Z axis position. Z axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

The EUT 2 was performed at Y axis and Z axis position. Y axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

Mode 1. Place EUT 1 in Z axis + Set 2

Mode 2. Place EUT 2 in Y axis + Set 3

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA541527AA) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple Listing

The model names are identical to each other in all aspects except for the following table:

Equipment	EUT	Model Name	Internal Antenna	External Antenna	Equipped Antenna
Indoor Wireless Access Point	1	IAP8251AG EWS371AP	X	V	Set 1~2
	2	IAP8250AG EWS370AP	V	X	Set 3

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB (For Below 1GHz)

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E4300	DoC
Flash disk	Silicon Power	I-Series	DoC
Adapter	Powertron Electronics Corp.	PA1024-120HUB200	N/A

For Test Site No: 03CH01-CB (For Above 1GHz)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Adapter	Powertron Electronics Corp.	PA1024-120HUB200	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E6430	DoC
Flash disk	Transcend	604108 8255	DoC
Adapter	Powertron Electronics Corp.	PA1024-120HUB200	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Adapter	Powertron Electronics Corp.	PA1024-120HUB200	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	19.5	20	19.5	18.5	22.5	19.5
802.11ac MCS0/Nss1 VHT20	19.5	20	19.5	18.5	22.5	19.5
Mode	NCB: 40MHz					
802.11ac MCS0/Nss1 VHT40	5190 MHz		5230 MHz		5755 MHz	
	15.5		20.5		18.5	
Mode	NCB: 80MHz					
802.11ac MCS0/Nss1 VHT80	5210 MHz			5775 MHz		
	13			12.5		

Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	18	19	19	18	23	21
802.11ac MCS0/Nss1 VHT20	18	18	18	18	23	21
Mode	NCB: 40MHz					
802.11ac MCS0/Nss1 VHT40	5190 MHz		5230 MHz		5755 MHz	
	15		19		16	
802.11ac MCS0/Nss1 VHT40	5795 MHz					
	19					
Mode	NCB: 80MHz					
802.11ac MCS0/Nss1 VHT80	5210 MHz			5775 MHz		
	11			12		

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	4.974	5.064	98.22	0.08	0.01
802.11ac MCS0/Nss1 VHT20	2.320	2.420	95.87	0.18	0.43
802.11ac MCS0/Nss1 VHT40	1.110	1.200	92.50	0.34	0.90
802.11ac MCS0/Nss1 VHT80	2.058	2.128	96.71	0.15	0.49

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions Test Configuration

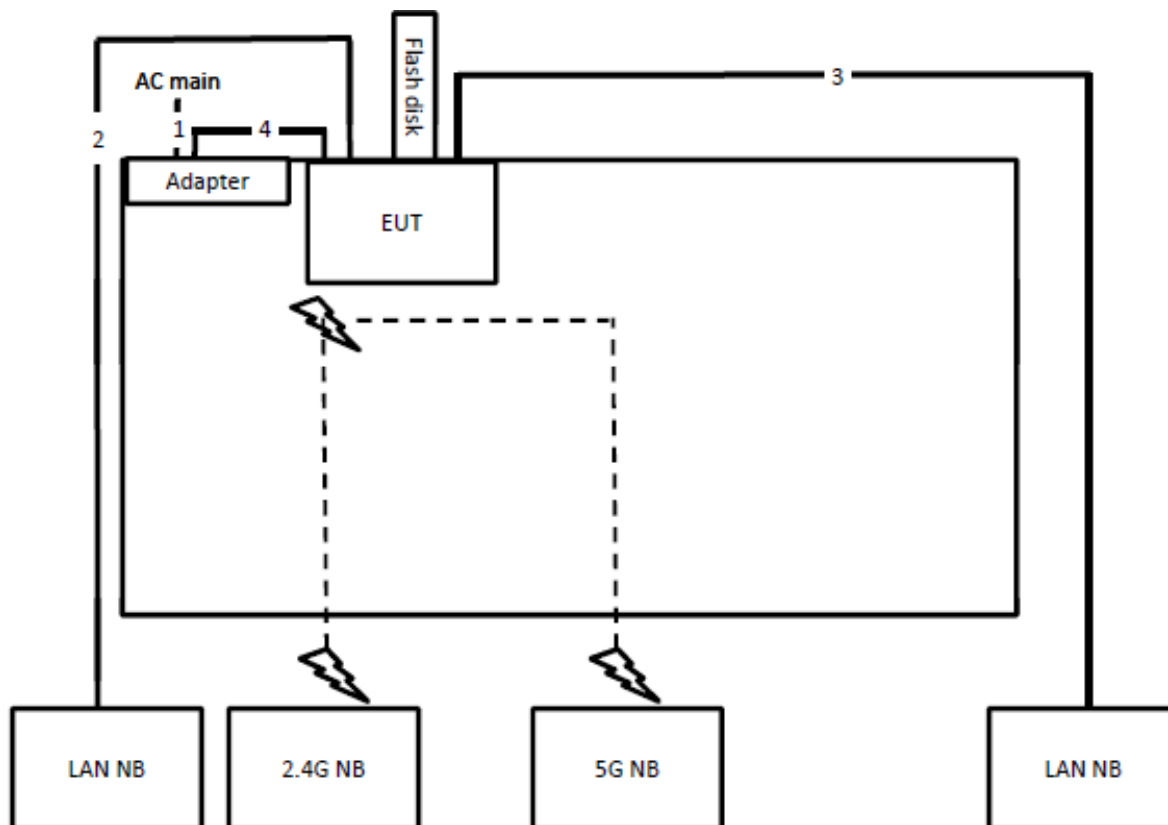

Item	Connection	Shielded	Length(m)
1	AC Power cable	No	1.8
2	RJ-45 cable	No	10
3	RJ-45 cable	No	10
4	DC Power cable	No	1.2


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

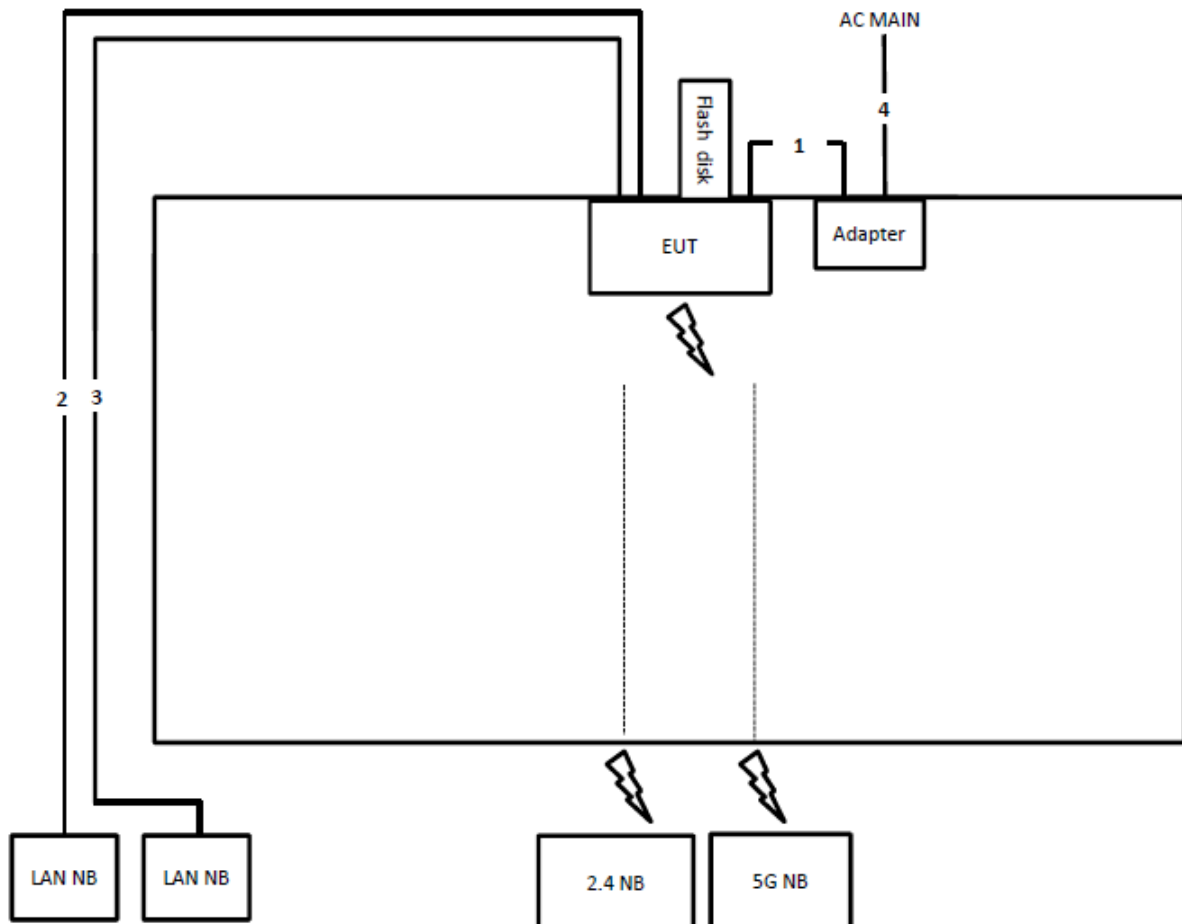

Item	Connection	Shielded	Length(m)
1	DC Power cable	No	1.2
2	RJ-45 cable	No	10
3	RJ-45 cable	No	10
4	AC Power cable	No	1.8

Test Configuration: above 1GHz

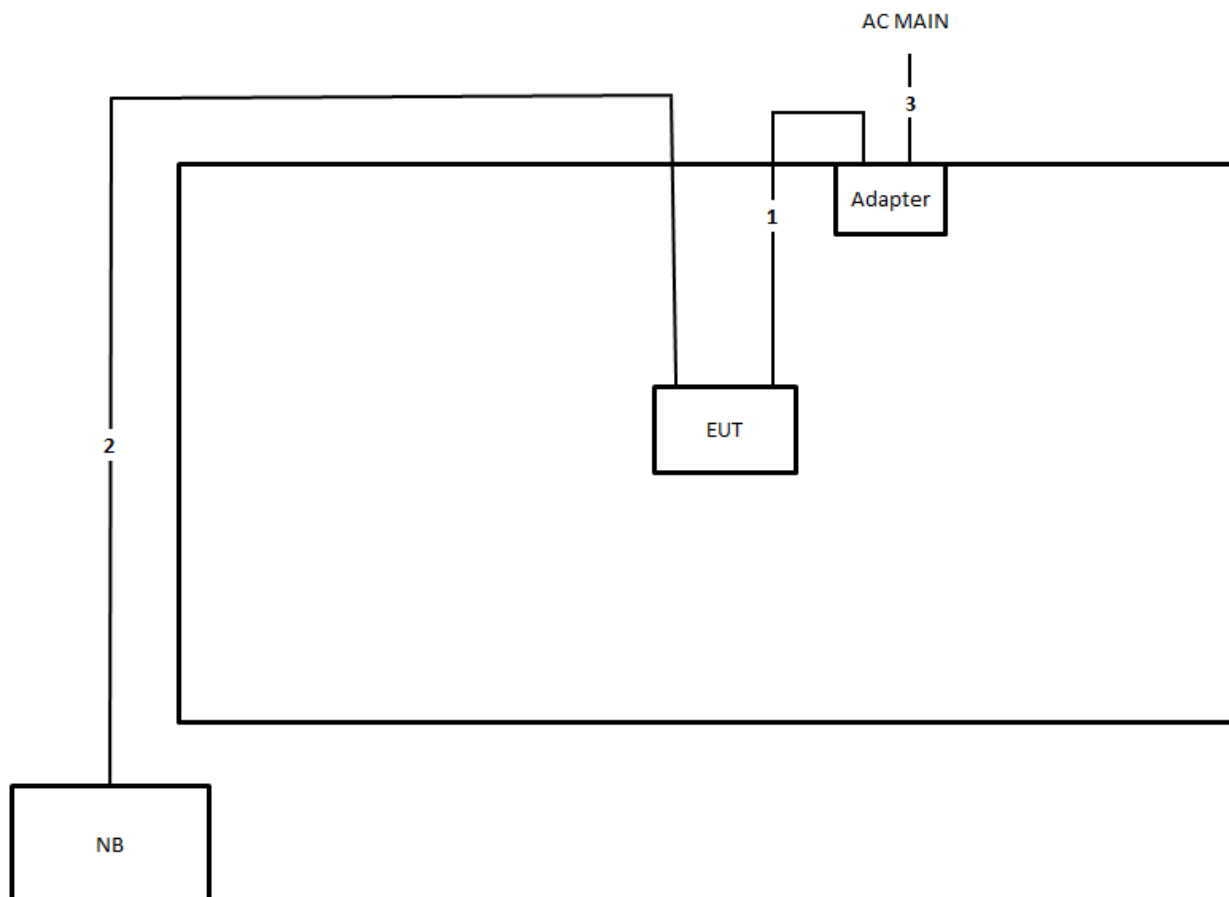

Item	Connection	Shielded	Length(m)
1	DC Power cable	No	1.2
2	RJ-45 cable	No	10
3	AC Power cable	No	1.8

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.




- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

There is no deviation with the original standard.

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

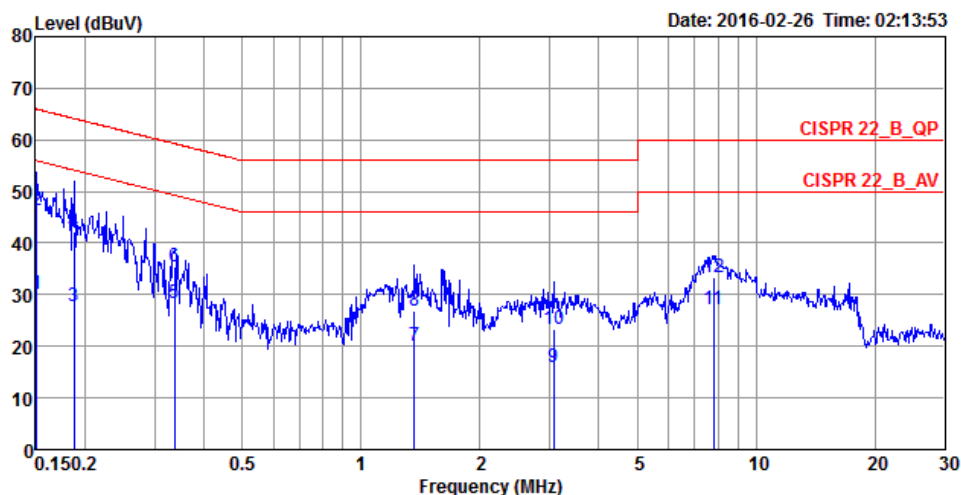

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1508	30.01	-25.95	55.96	20.06	9.93	0.02	LINE	Average
2	0.1508	46.43	-19.53	65.96	36.48	9.93	0.02	LINE	QP
3	0.1874	27.67	-26.48	54.15	17.72	9.93	0.02	LINE	Average
4	0.1874	42.20	-21.95	64.15	32.25	9.93	0.02	LINE	QP
5	0.3374	28.32	-20.95	49.27	18.35	9.93	0.04	LINE	Average
6	0.3374	35.37	-23.90	59.27	25.40	9.93	0.04	LINE	QP
7	1.3665	20.16	-25.84	46.00	10.14	9.97	0.05	LINE	Average
8	1.3665	26.98	-29.02	56.00	16.96	9.97	0.05	LINE	QP
9	3.0738	15.92	-30.08	46.00	5.86	10.01	0.05	LINE	Average
10	3.0738	23.42	-32.58	56.00	13.36	10.01	0.05	LINE	QP
11	7.8102	27.11	-22.89	50.00	16.81	10.14	0.16	LINE	Average
12	7.8102	33.27	-26.73	60.00	22.97	10.14	0.16	LINE	QP

Temperature	23°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

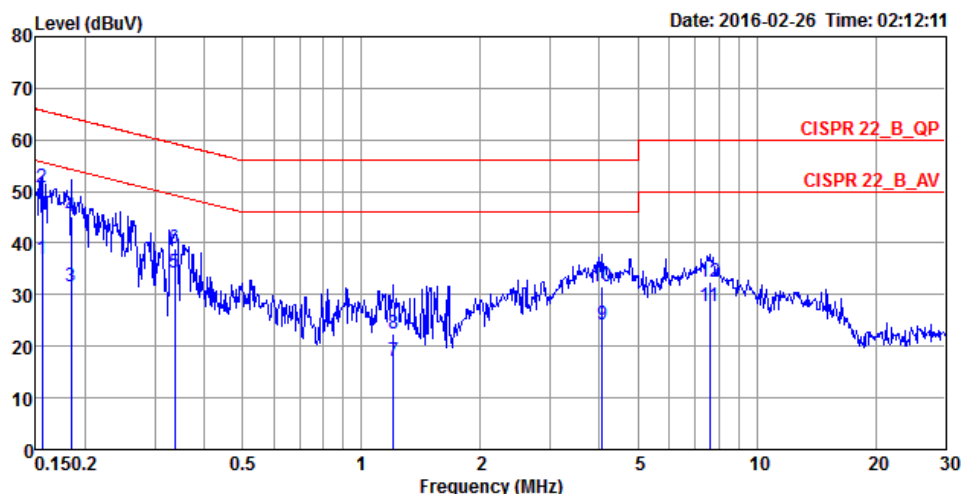

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1557	36.84	-18.85	55.69	27.04	9.78	0.02	NEUTRAL	Average
2	0.1557	50.83	-14.86	65.69	41.03	9.78	0.02	NEUTRAL	QP
3	0.1844	31.72	-22.56	54.28	21.91	9.79	0.02	NEUTRAL	Average
4	0.1844	45.19	-19.09	64.28	35.38	9.79	0.02	NEUTRAL	QP
5	0.3374	34.38	-14.89	49.27	24.55	9.79	0.04	NEUTRAL	Average
6	0.3374	38.92	-20.35	59.27	29.09	9.79	0.04	NEUTRAL	QP
7	1.2034	17.18	-28.82	46.00	7.31	9.82	0.05	NEUTRAL	Average
8	1.2034	22.48	-33.52	56.00	12.61	9.82	0.05	NEUTRAL	QP
9	4.0704	24.22	-21.78	46.00	14.28	9.87	0.07	NEUTRAL	Average
10	4.0704	31.50	-24.50	56.00	21.56	9.87	0.07	NEUTRAL	QP
11	7.6060	27.87	-22.13	50.00	17.75	9.97	0.15	NEUTRAL	Average
12	7.6060	32.58	-27.42	60.00	22.46	9.97	0.15	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	25°C	Humidity	55%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	20.61	16.93
	5200 MHz	20.43	16.93
	5240 MHz	20.52	16.76
	5745 MHz	18.87	16.50
	5785 MHz	34.52	24.23
	5825 MHz	18.87	16.58
802.11ac MCS0/Nss1 VHT20	5180 MHz	20.70	17.97
	5200 MHz	21.57	17.97
	5240 MHz	21.13	17.80
	5745 MHz	19.91	17.63
	5785 MHz	34.43	23.53
	5825 MHz	19.57	17.63
802.11ac MCS0/Nss1 VHT40	5190 MHz	38.84	35.02
	5230 MHz	52.61	35.31
	5755 MHz	39.28	35.60
	5795 MHz	39.42	35.75
802.11ac MCS0/Nss1 VHT80	5210 MHz	80.29	74.38
	5775 MHz	80.58	74.96

Temperature	25°C	Humidity	55%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	18.34	16.24
	5200 MHz	18.26	16.24
	5240 MHz	18.43	16.32
	5745 MHz	18.43	16.32
	5785 MHz	43.48	29.78
	5825 MHz	18.78	16.50
802.11ac MCS0/Nss1 VHT20	5180 MHz	18.96	17.11
	5200 MHz	18.78	17.02
	5240 MHz	19.04	17.28
	5745 MHz	19.04	17.37
	5785 MHz	44.26	26.31
	5825 MHz	20.26	17.54
802.11ac MCS0/Nss1 VHT40	5190 MHz	39.71	36.47
	5230 MHz	40.29	36.47
	5755 MHz	40.00	36.32
	5795 MHz	40.00	36.18
802.11ac MCS0/Nss1 VHT80	5210 MHz	83.19	76.12
	5775 MHz	84.35	75.54


Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2
+ Chain 3 + Chain 4 / 5180 MHz

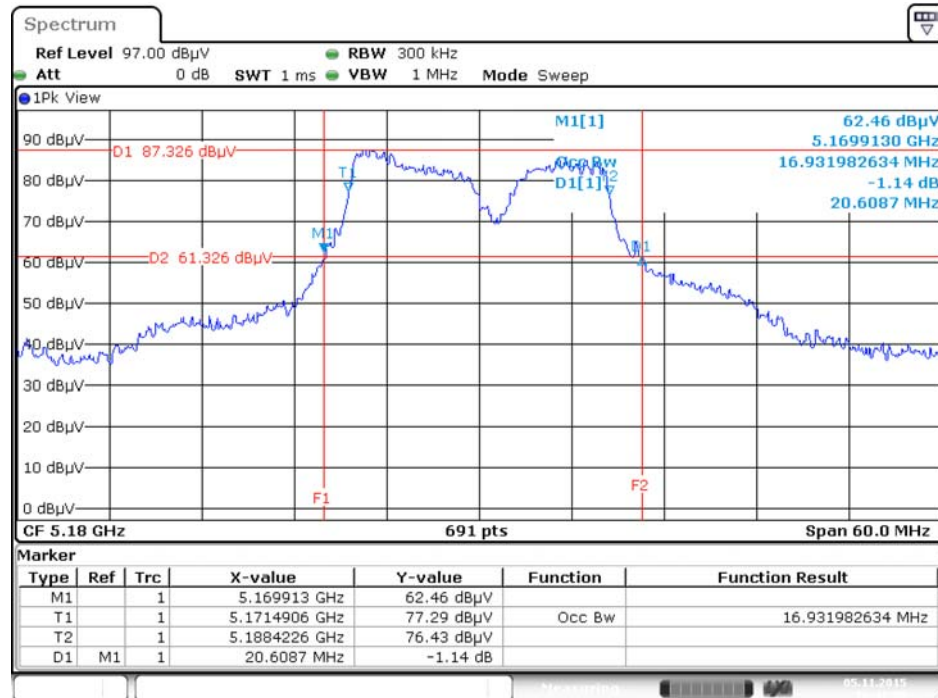


Date: 5.NOV.2015 10:41:09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2
+ Chain 3 + Chain 4 / 5200 MHz

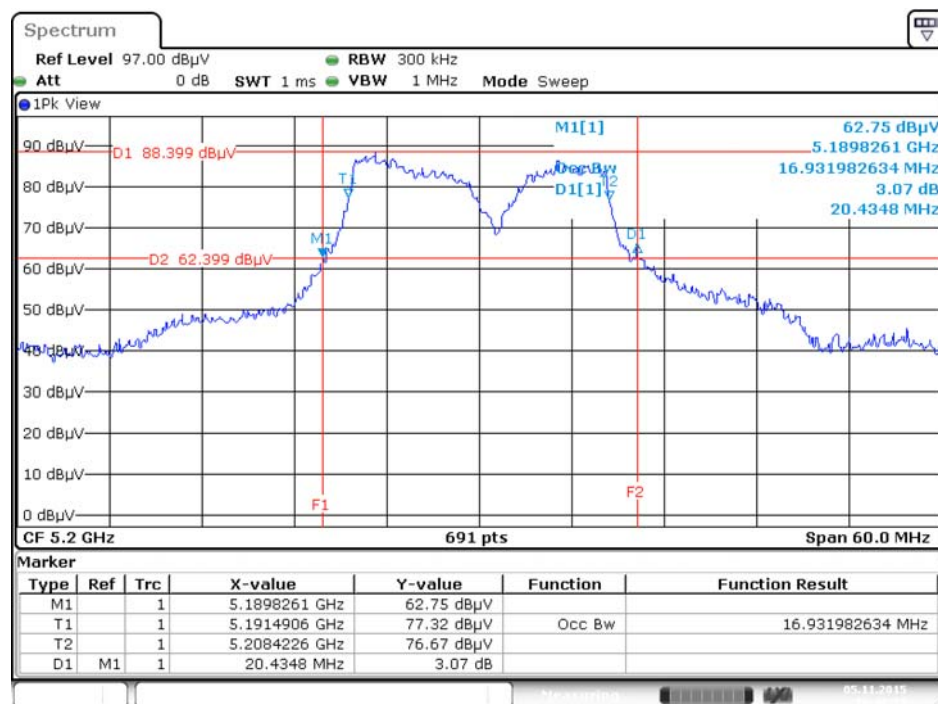


Date: 5.NOV.2015 10:42:33

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

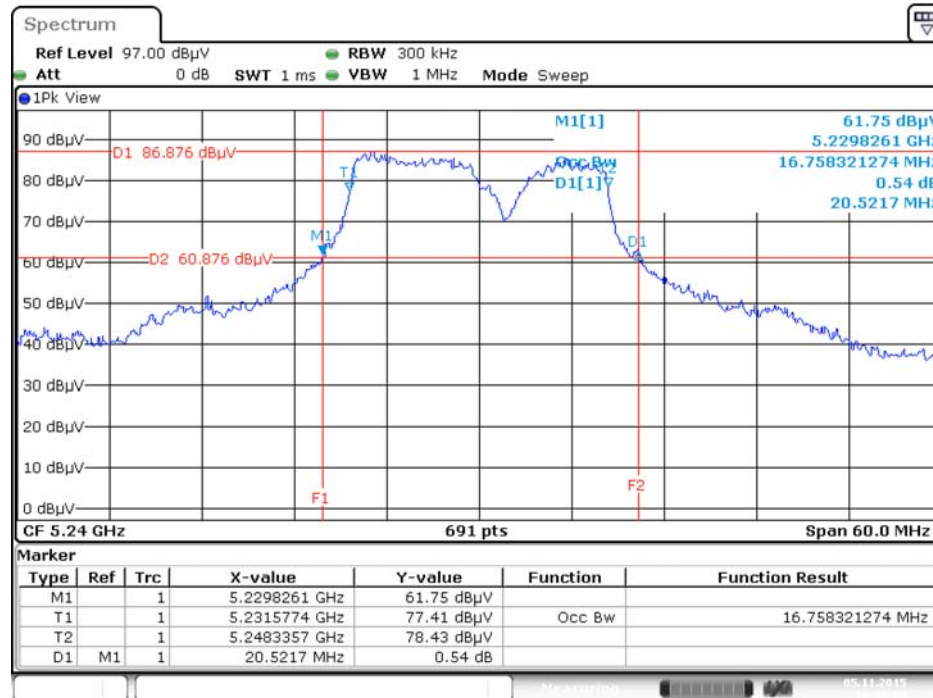


Date: 5.NOV.2015 10:43:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5745 MHz

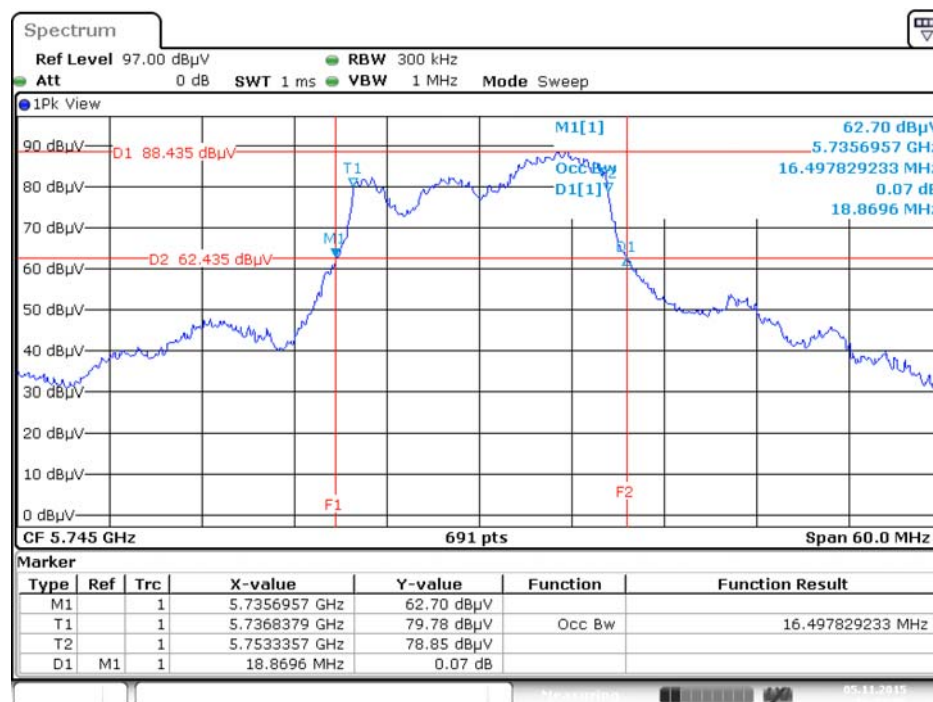


Date: 5.NOV.2015 10:53:27

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

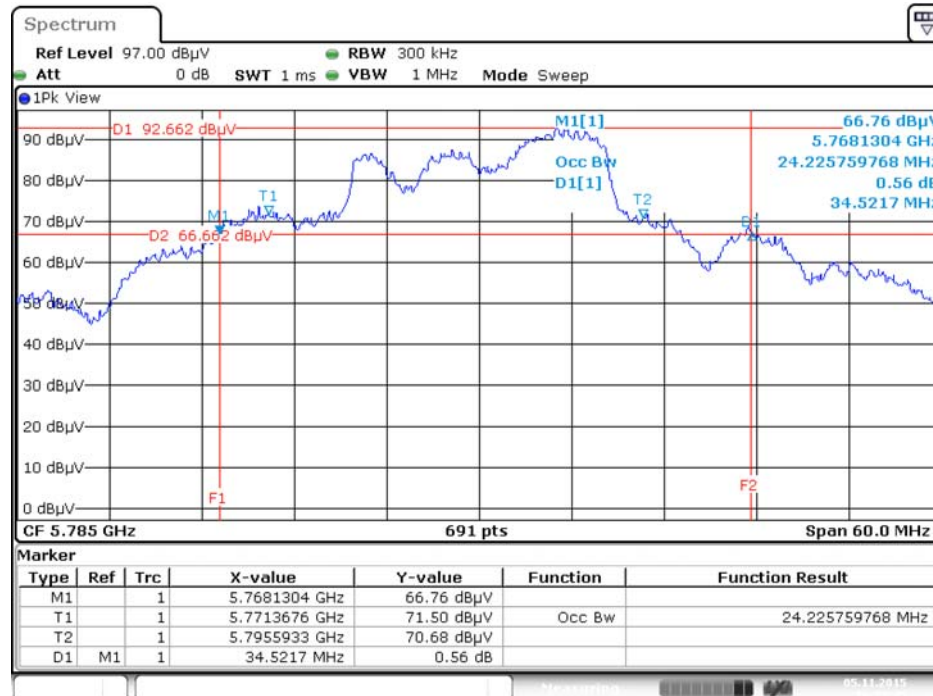


Date: 5.NOV.2015 10:53:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5825 MHz

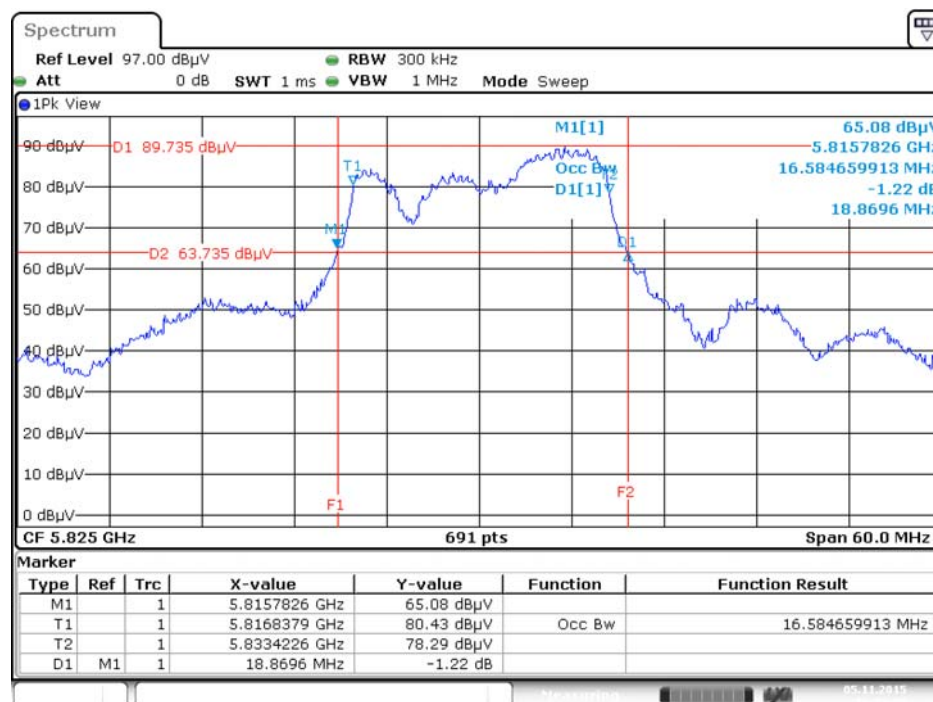


Date: 5.NOV.2015 10:54:29

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

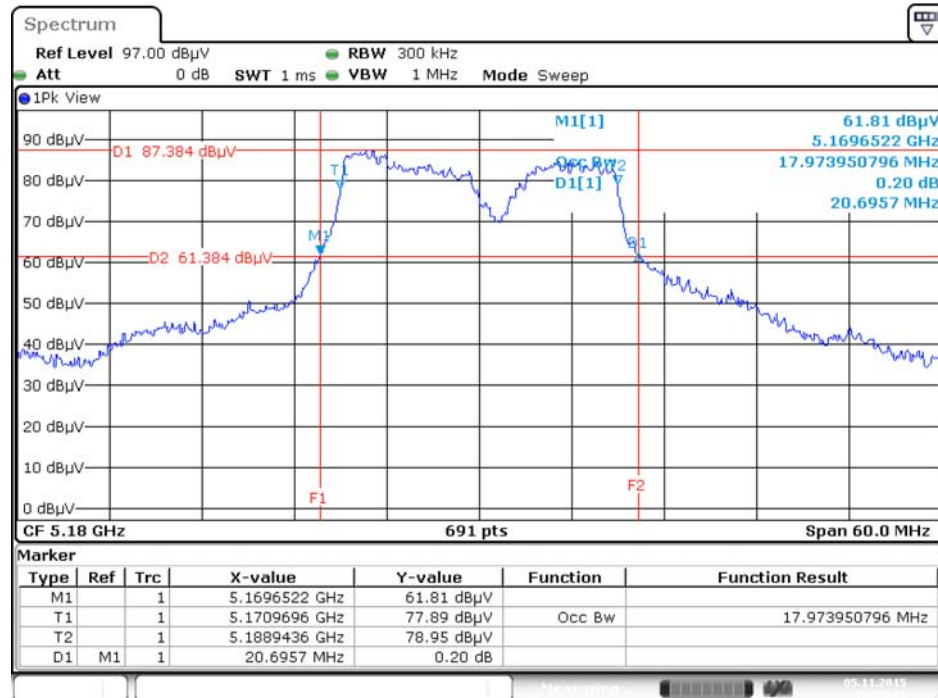


Date: 5.NOV.2015 10:59:16

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

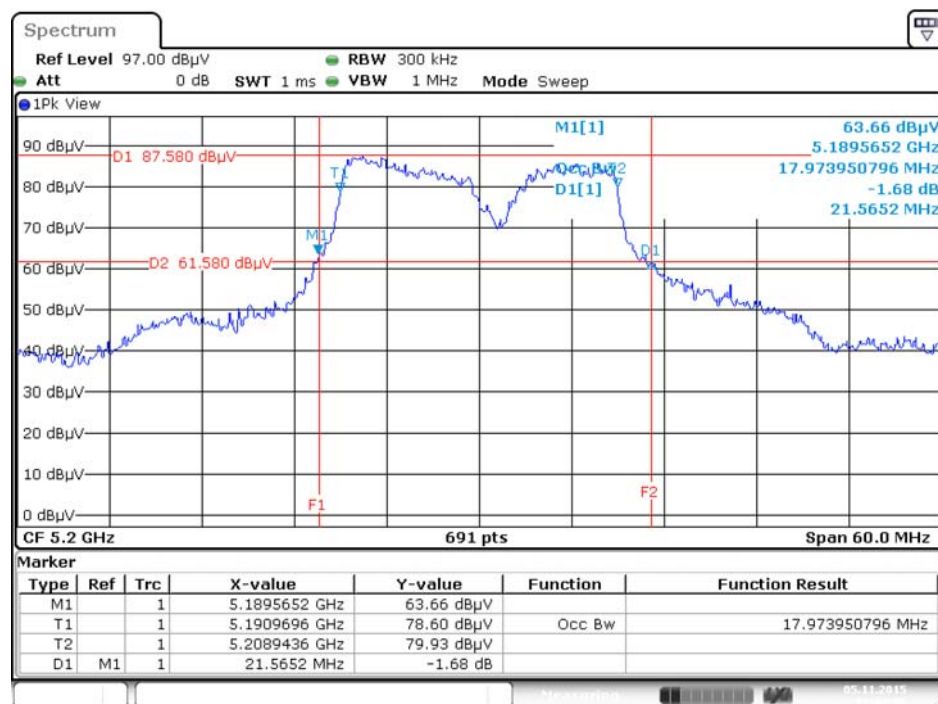


Date: 5.NOV.2015 11:00:36

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

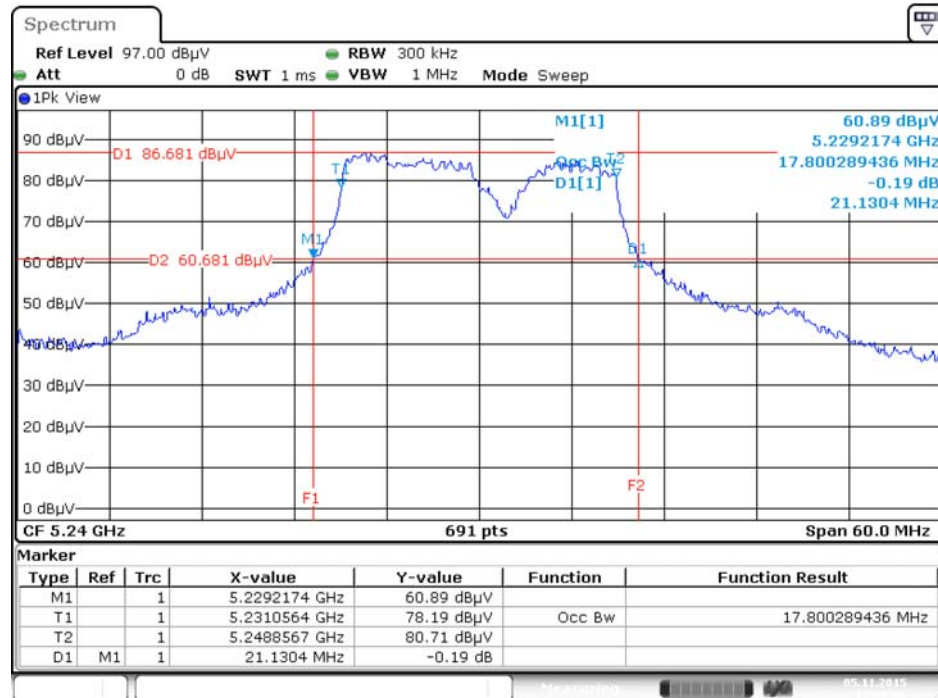


Date: 5.NOV.2015 11:01:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5745 MHz

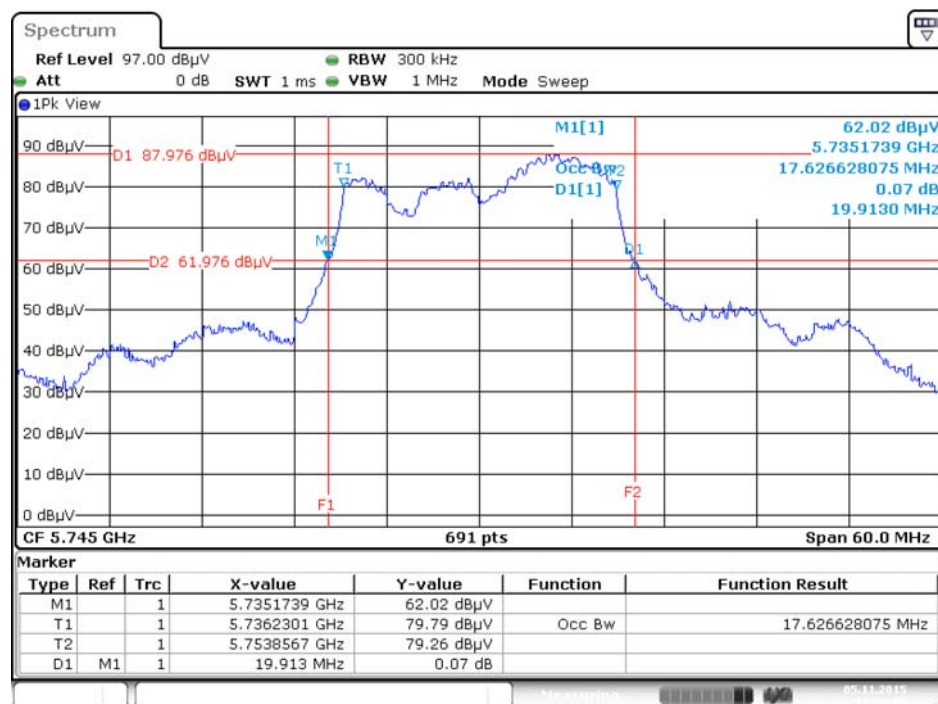


Date: 5.NOV.2015 11:04:05

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

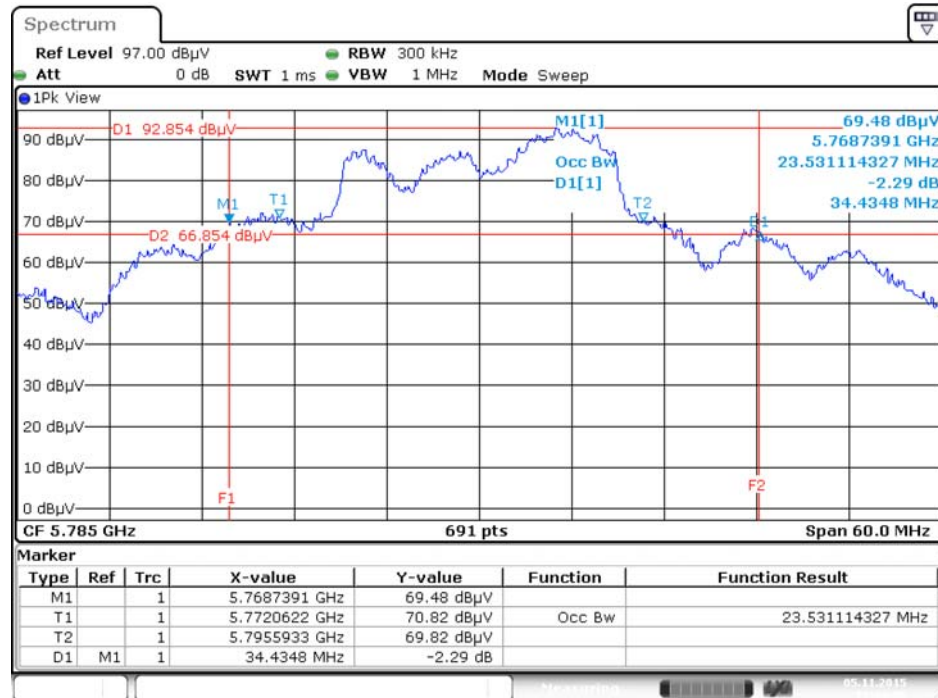


Date: 5.NOV.2015 11:04:27

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5825 MHz

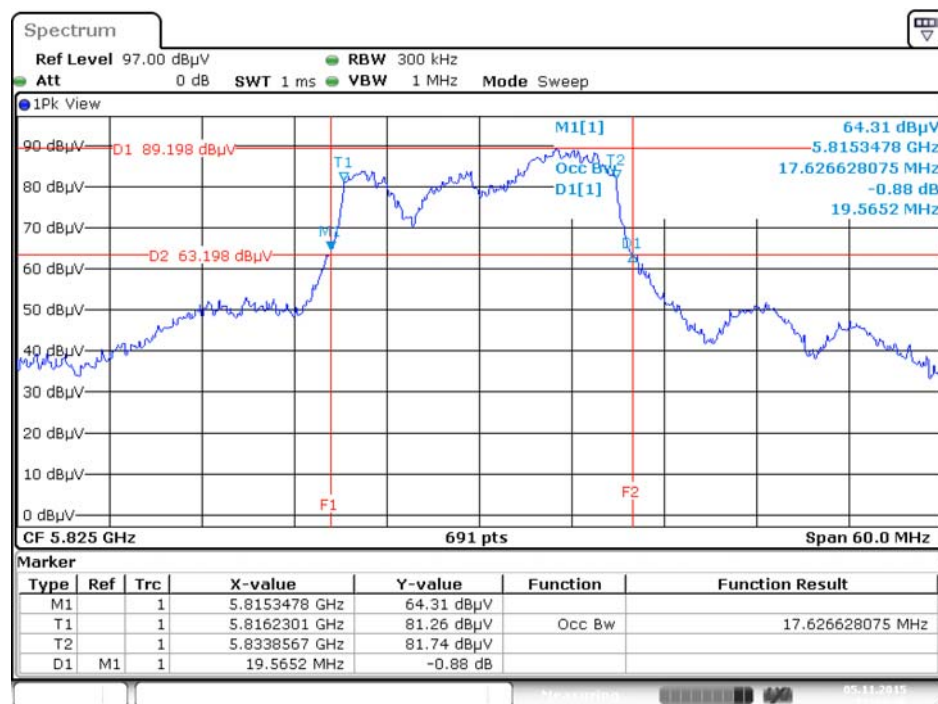


Date: 5.NOV.2015 11:04:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

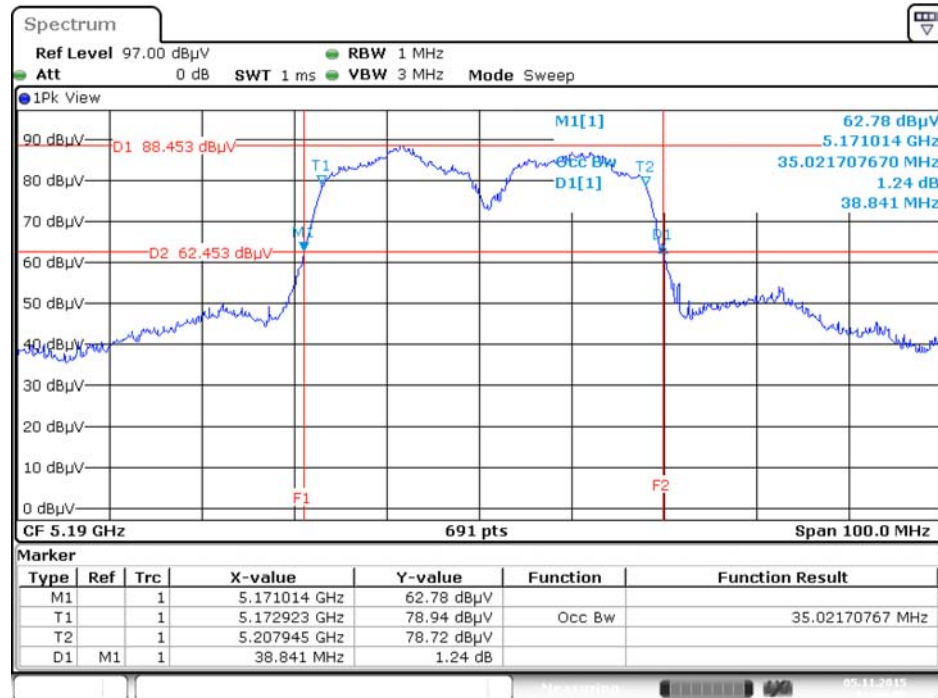


Date: 5.NOV.2015 11:09:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

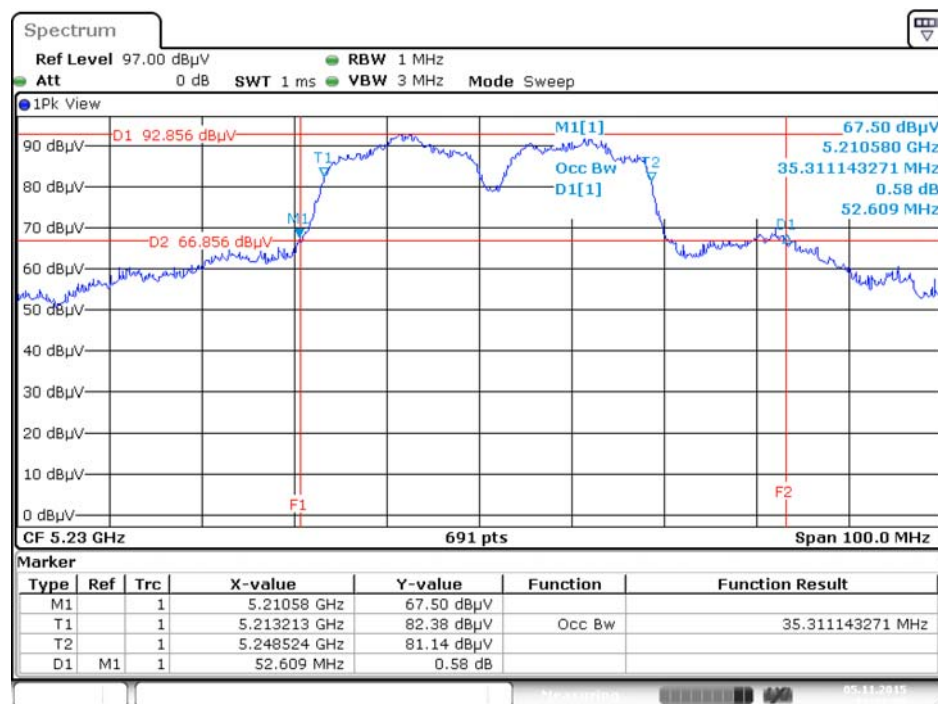


Date: 5.NOV.2015 11:11:08

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5755 MHz

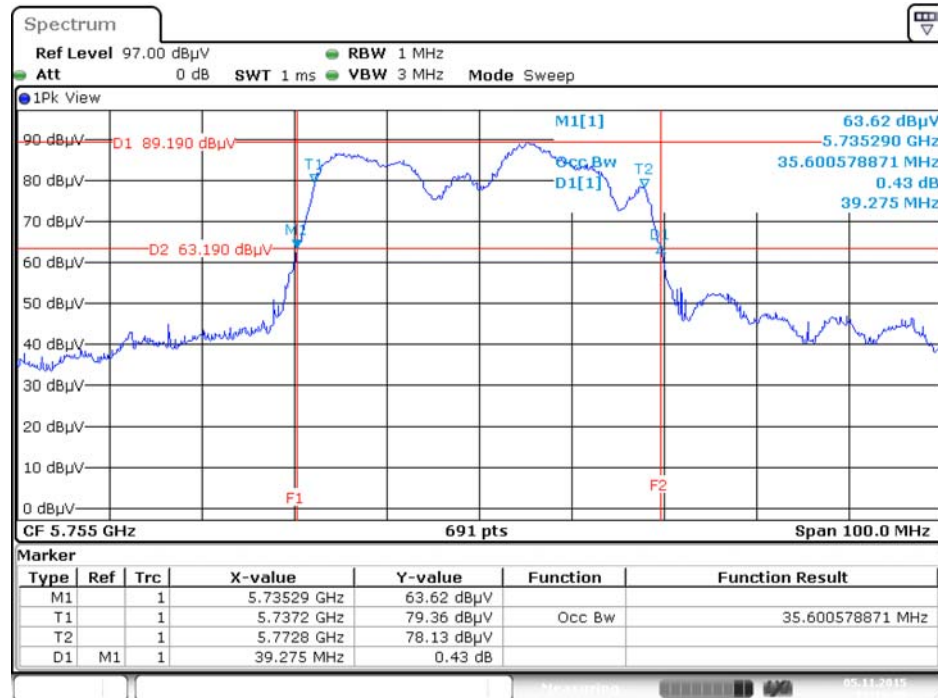


Date: 5.NOV.2015 11:19:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

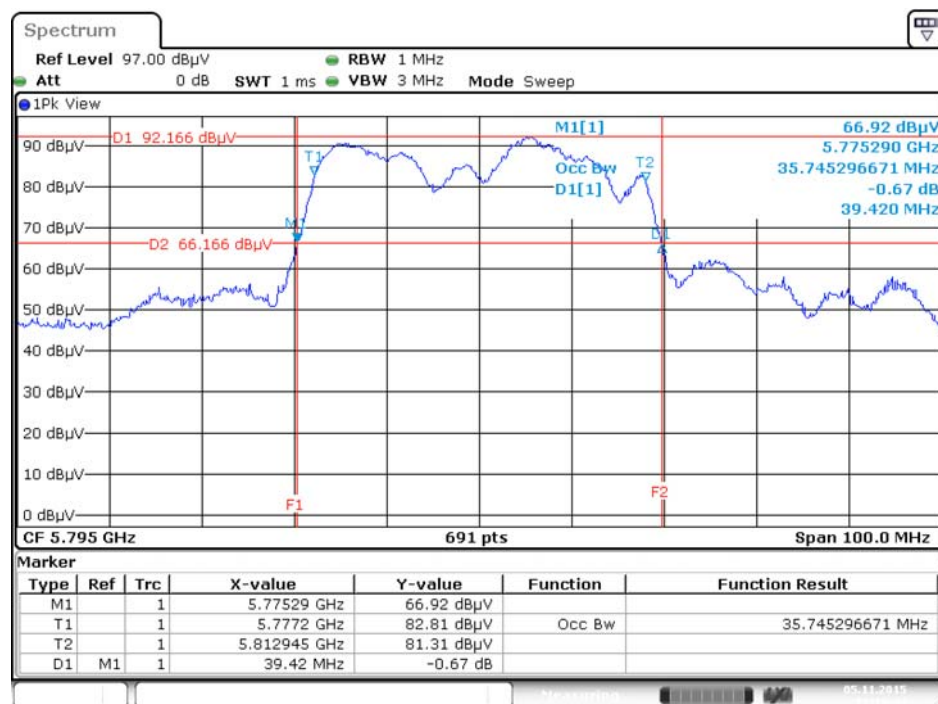


Date: 5.NOV.2015 11:19:43

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

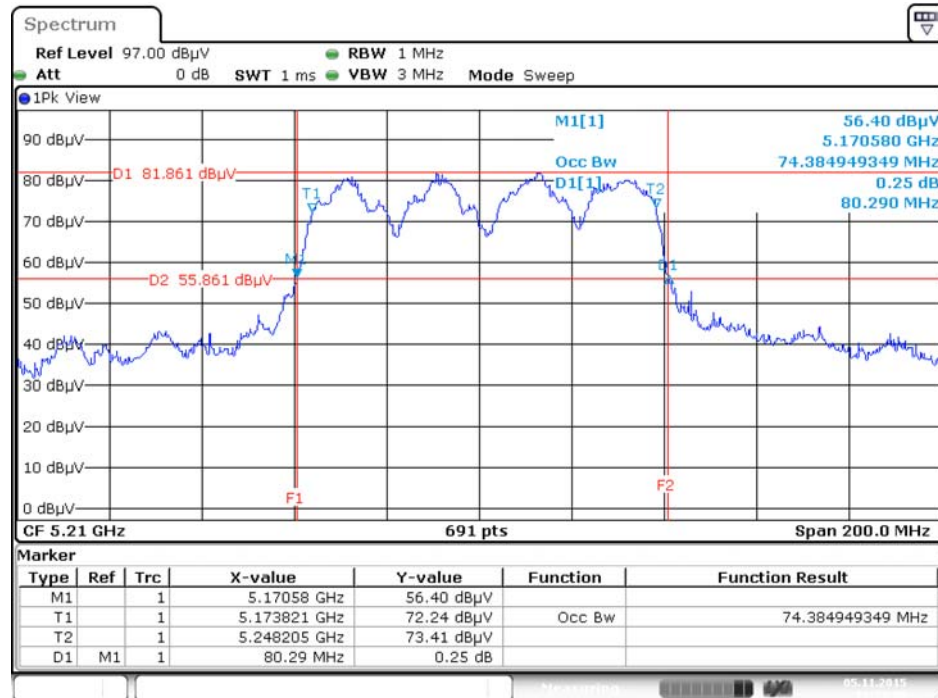

Date: 5.NOV.2015 11:23:29


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

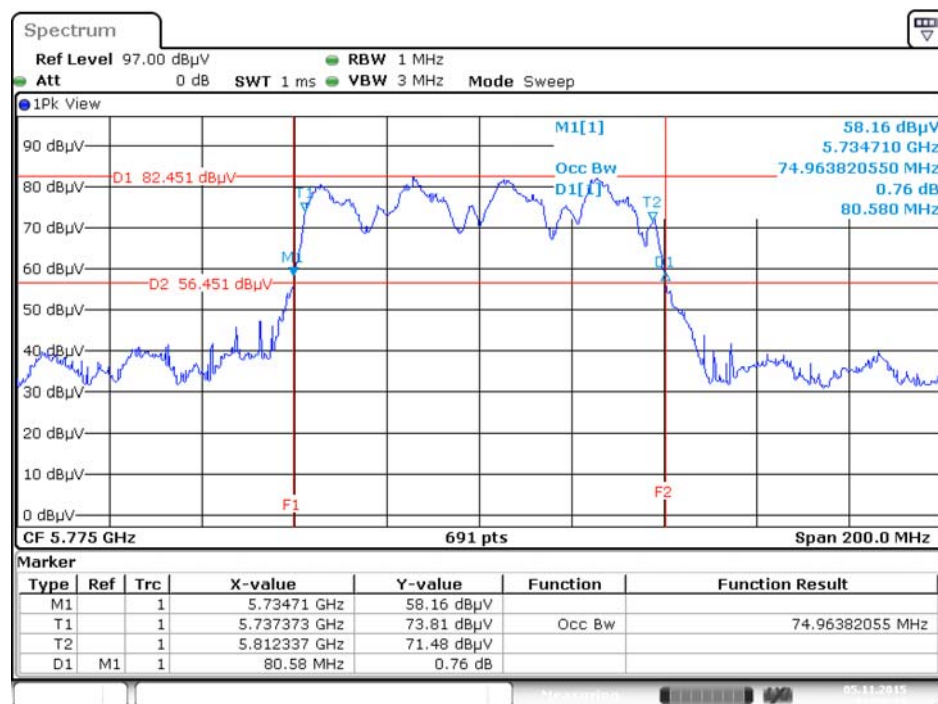


Date: 5.NOV.2015 11:25:39

Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

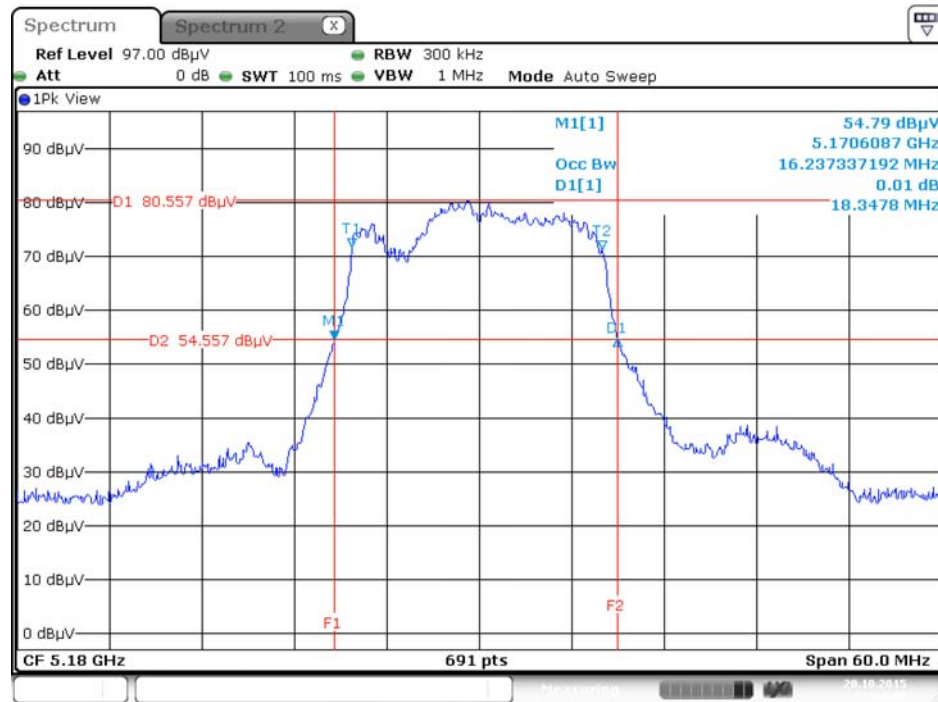

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

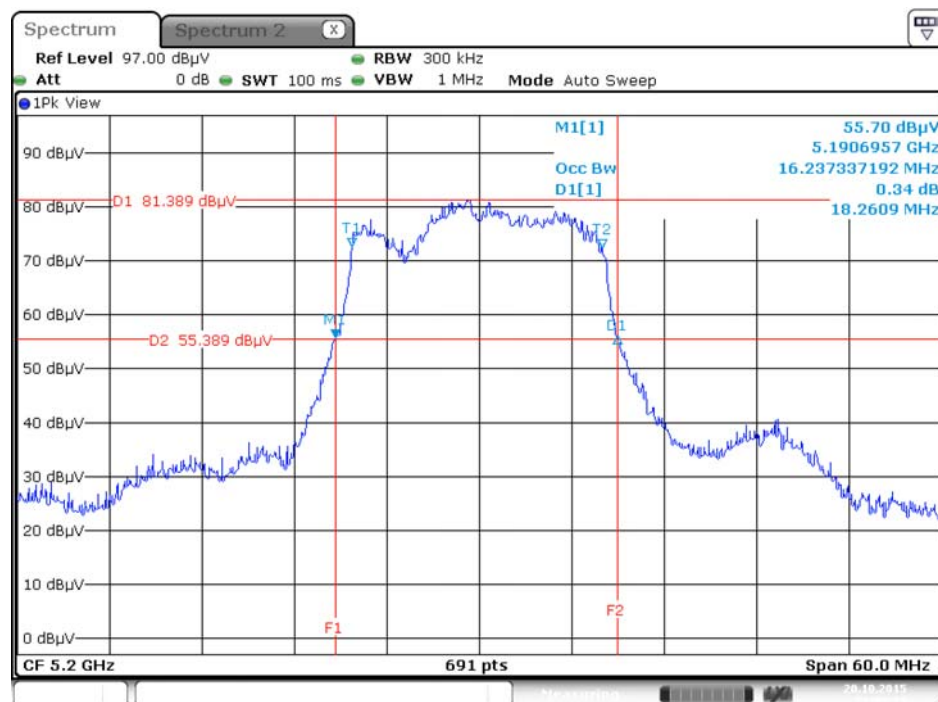


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2
+ Chain 3 + Chain 4 / 5240 MHz

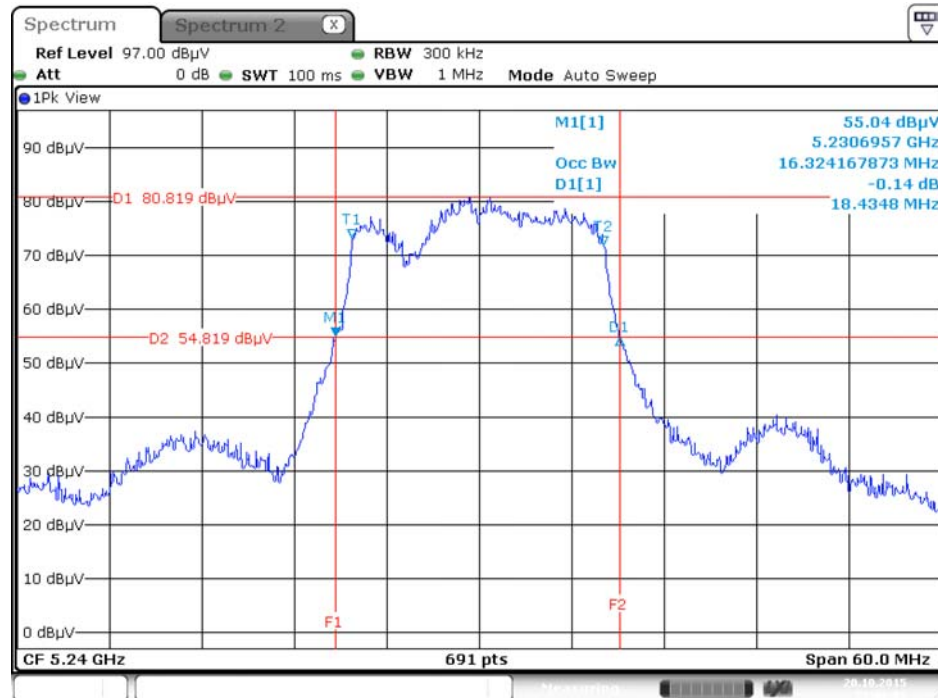


Date: 20.OCT.2015 23:06:01

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2
+ Chain 3 + Chain 4 / 5745 MHz

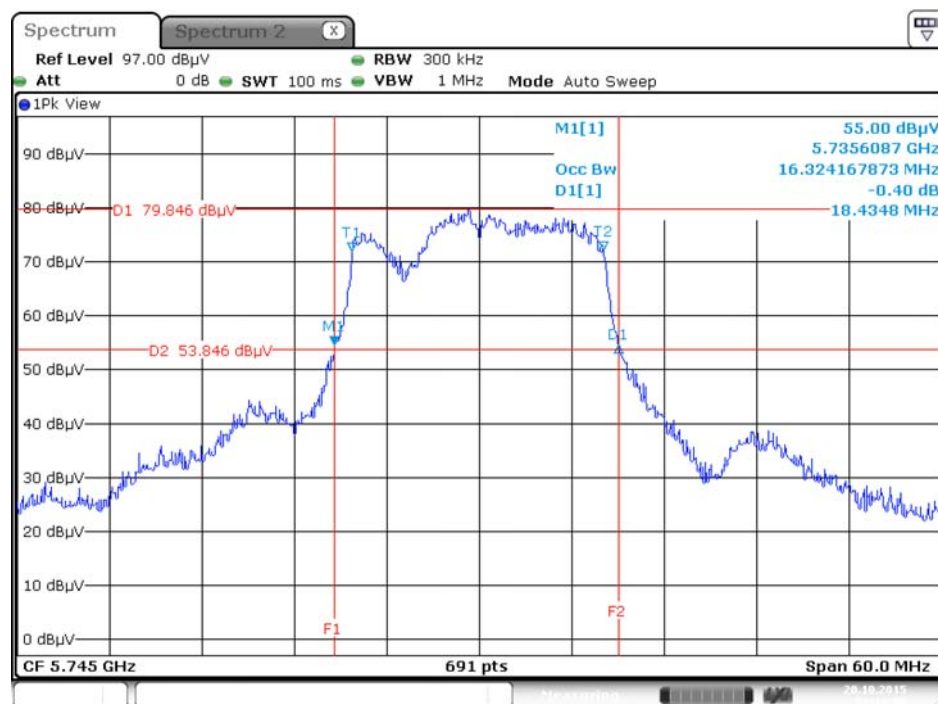


Date: 20.OCT.2015 23:10:05

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

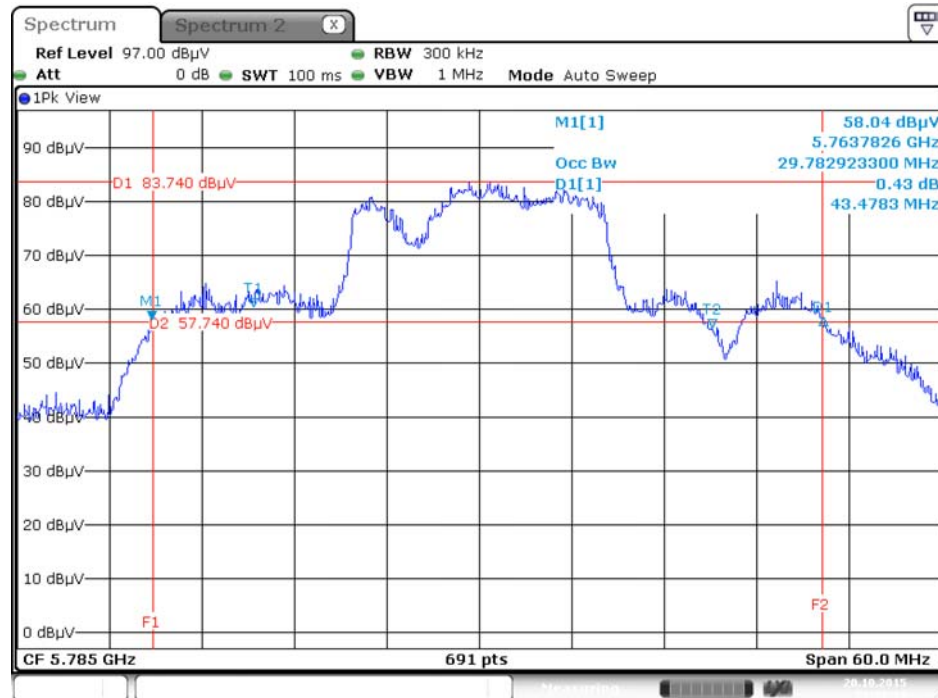


Date: 20.OCT.2015 23:11:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5825 MHz

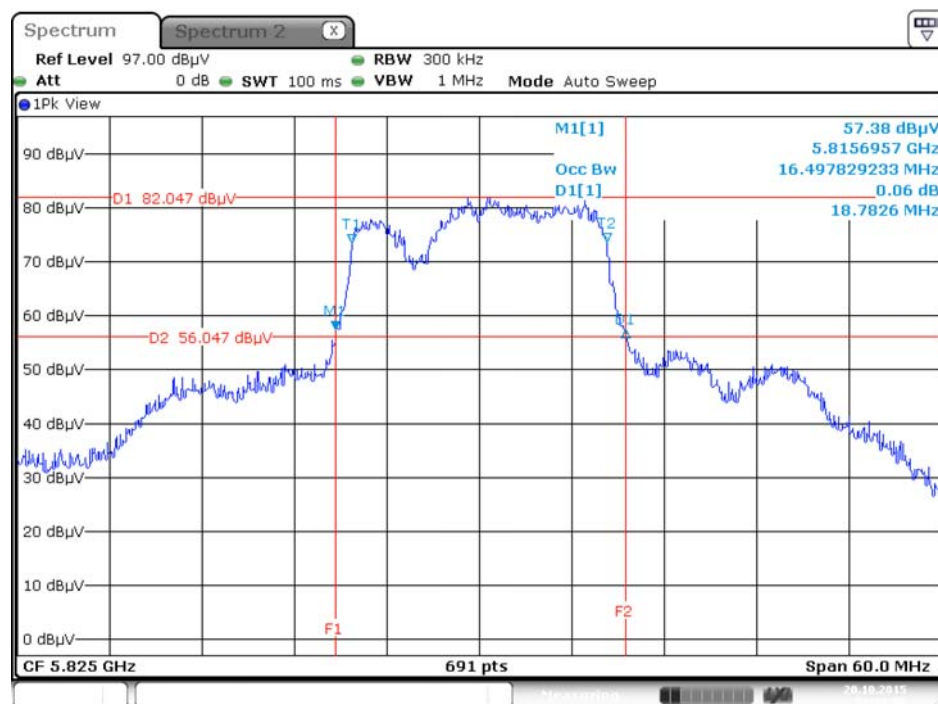


Date: 20.OCT.2015 23:11:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

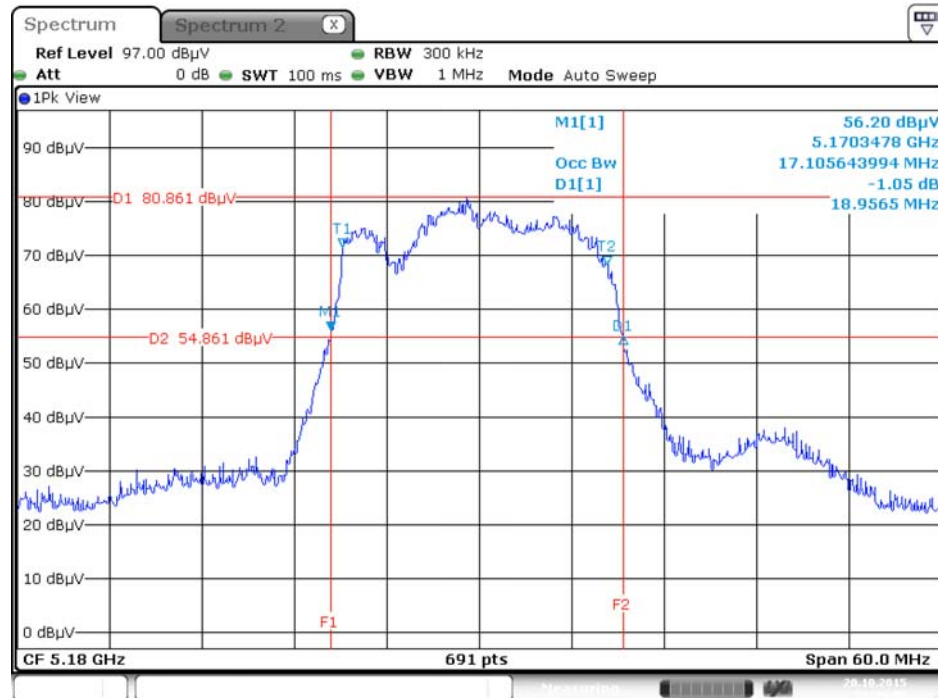


Date: 20.OCT.2015 23:29:05

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

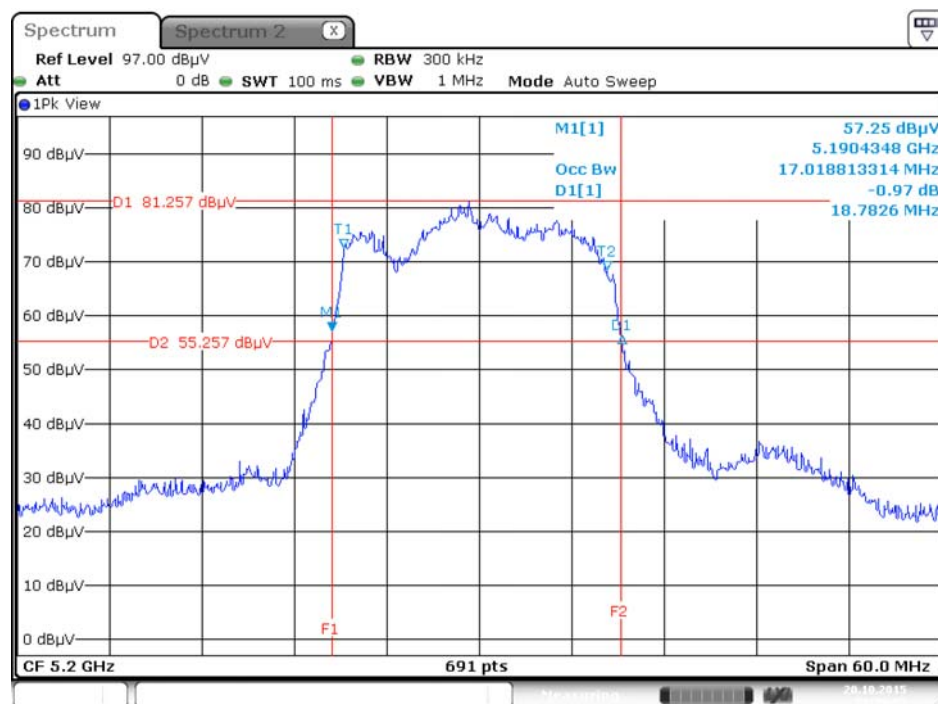


Date: 20.OCT.2015 23:29:52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

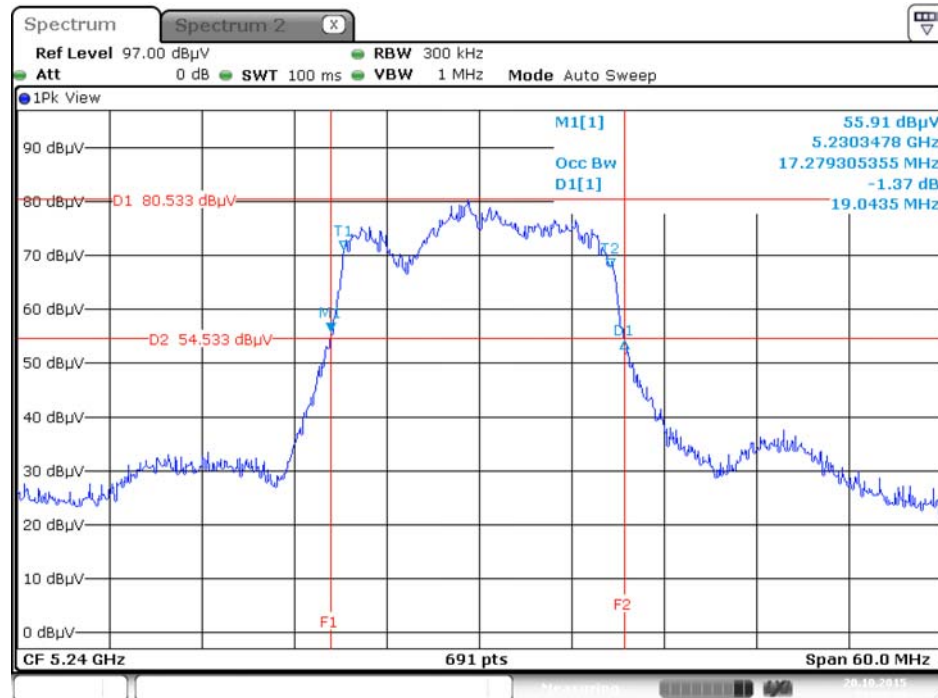


Date: 20.OCT.2015 23:30:25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5745 MHz

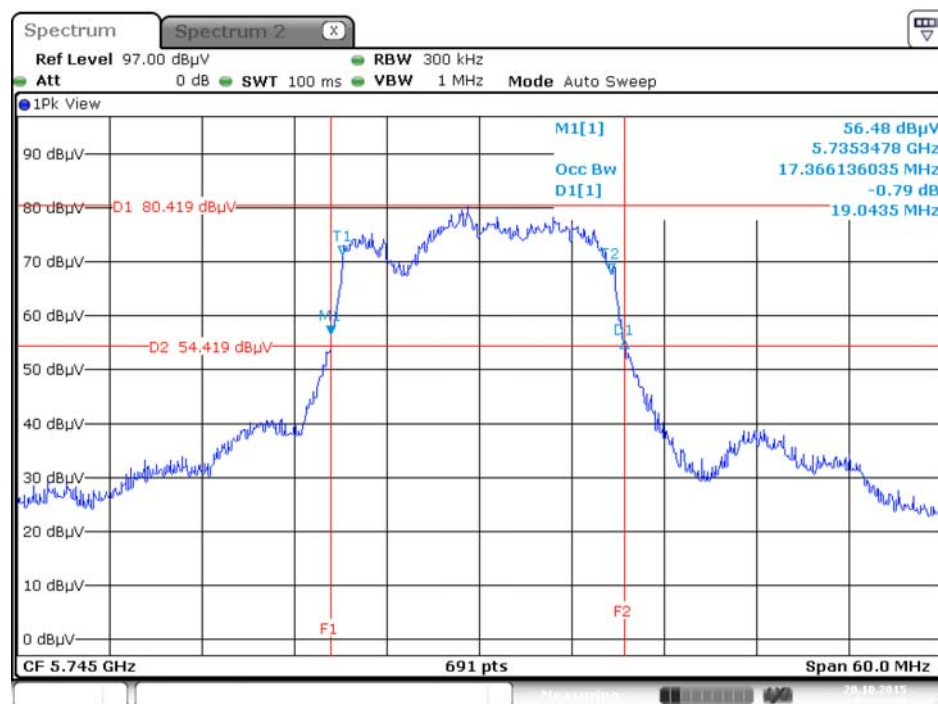


Date: 20.OCT.2015 23:34:54

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

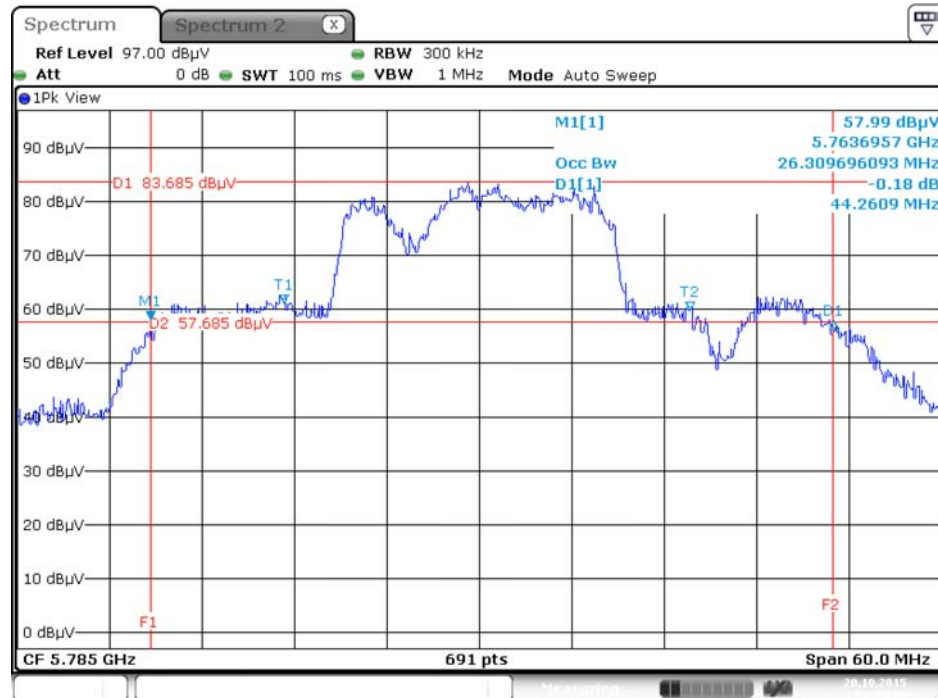


Date: 20.OCT.2015 23:35:27

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5825 MHz

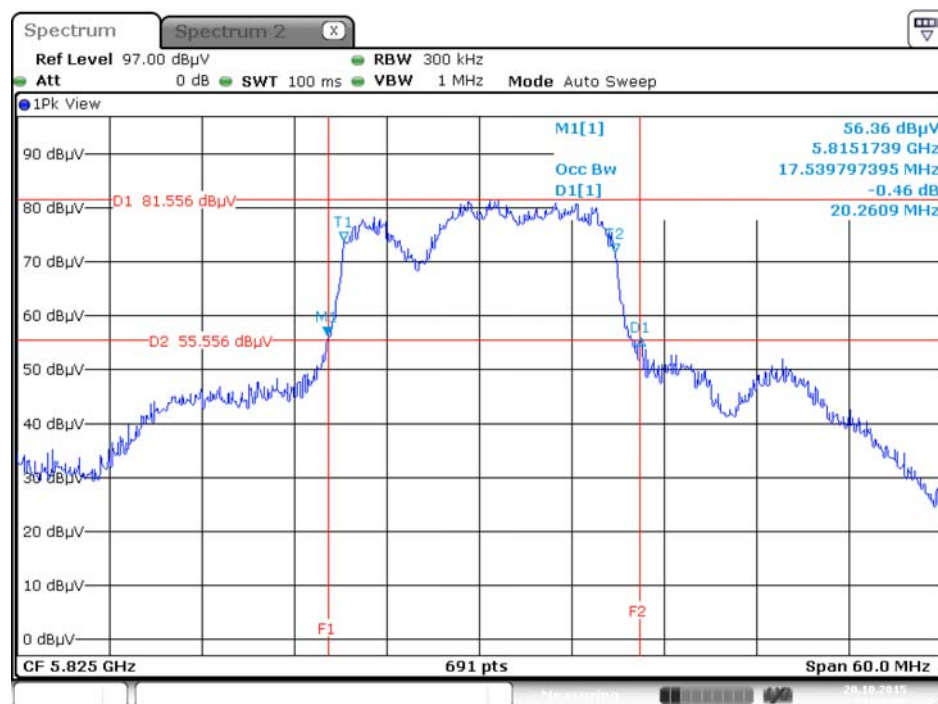


Date: 20.OCT.2015 23:36:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

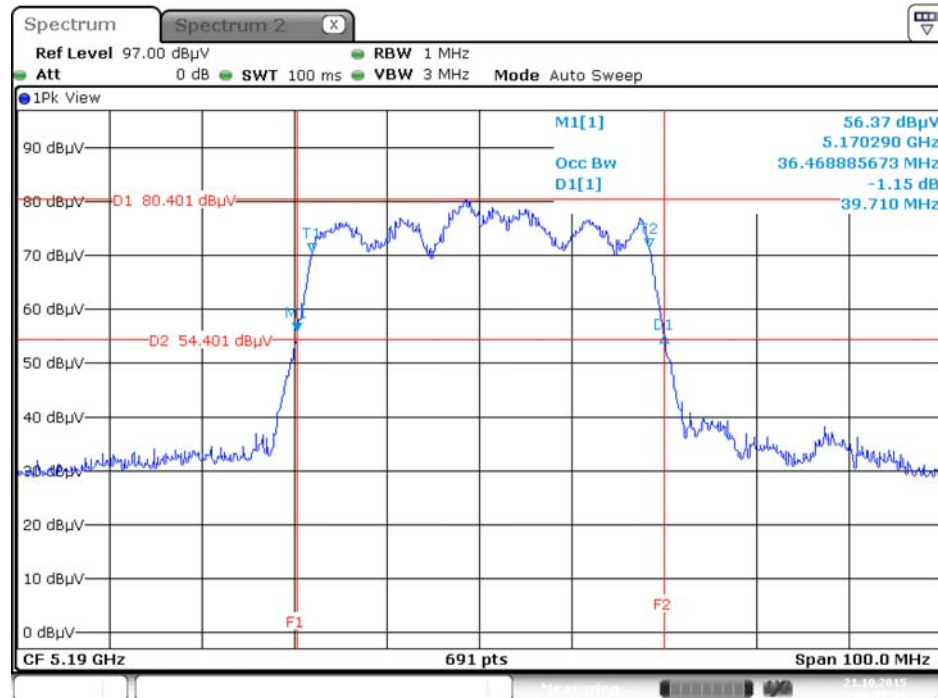


Date: 21.OCT.2015 00:17:41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

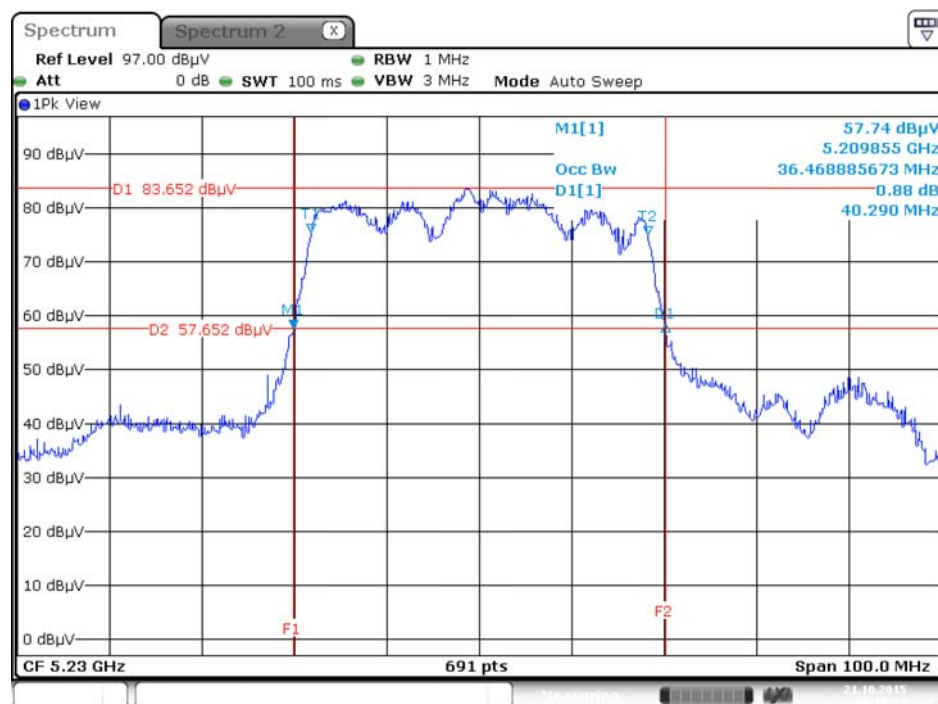


Date: 21.OCT.2015 00:18:13


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5755 MHz

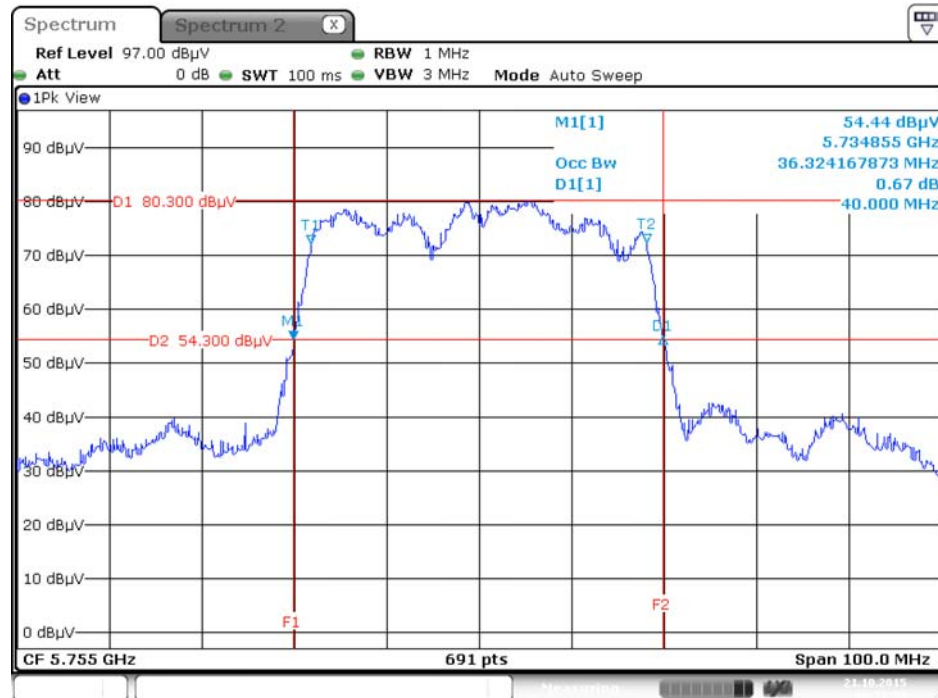

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

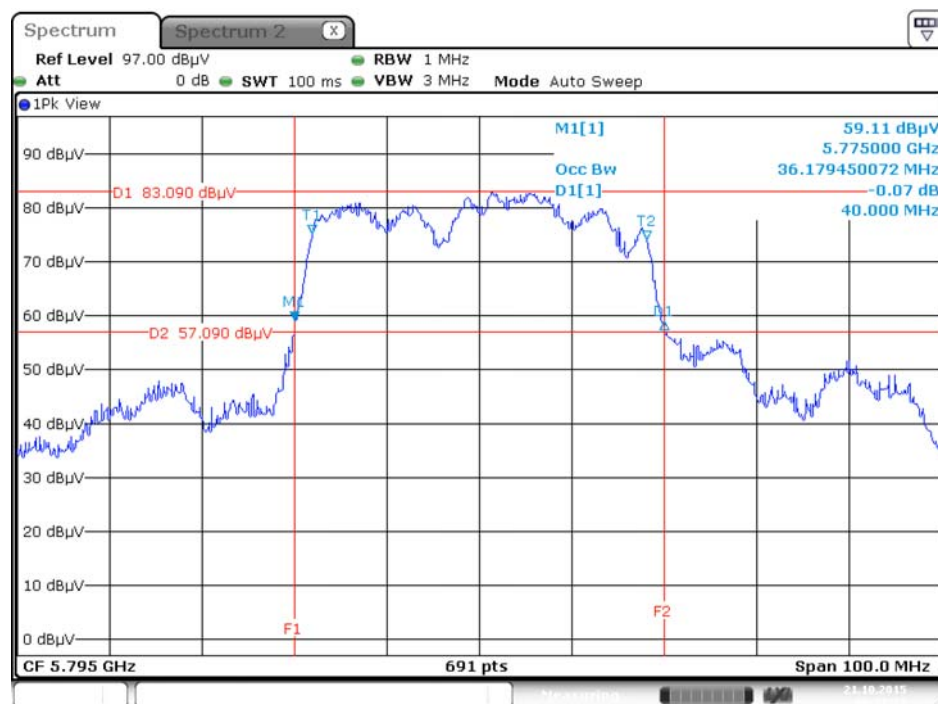


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

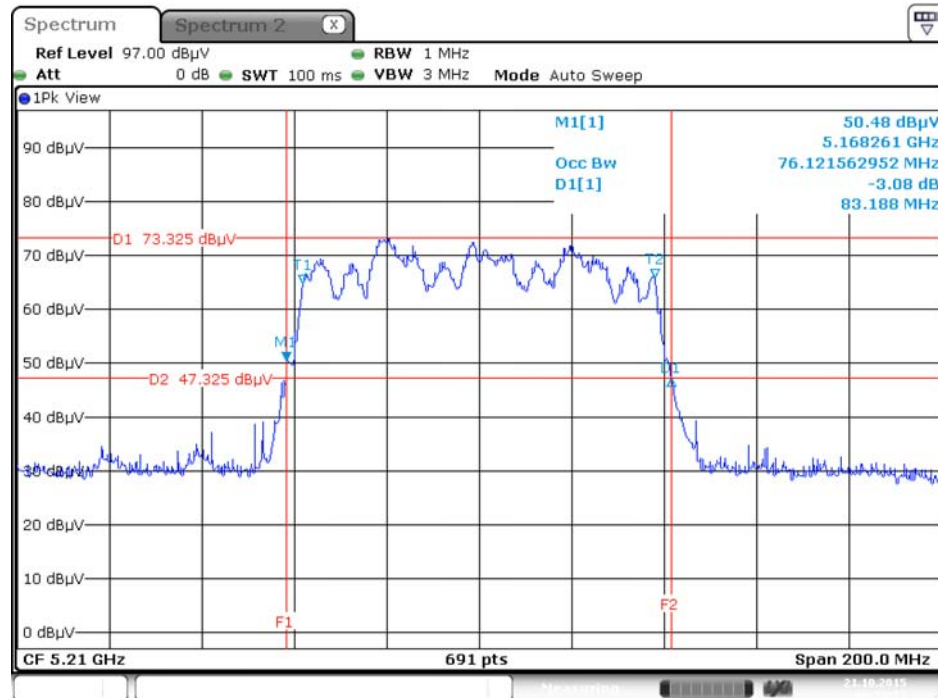

Date: 21.OCT.2015 00:23:21

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

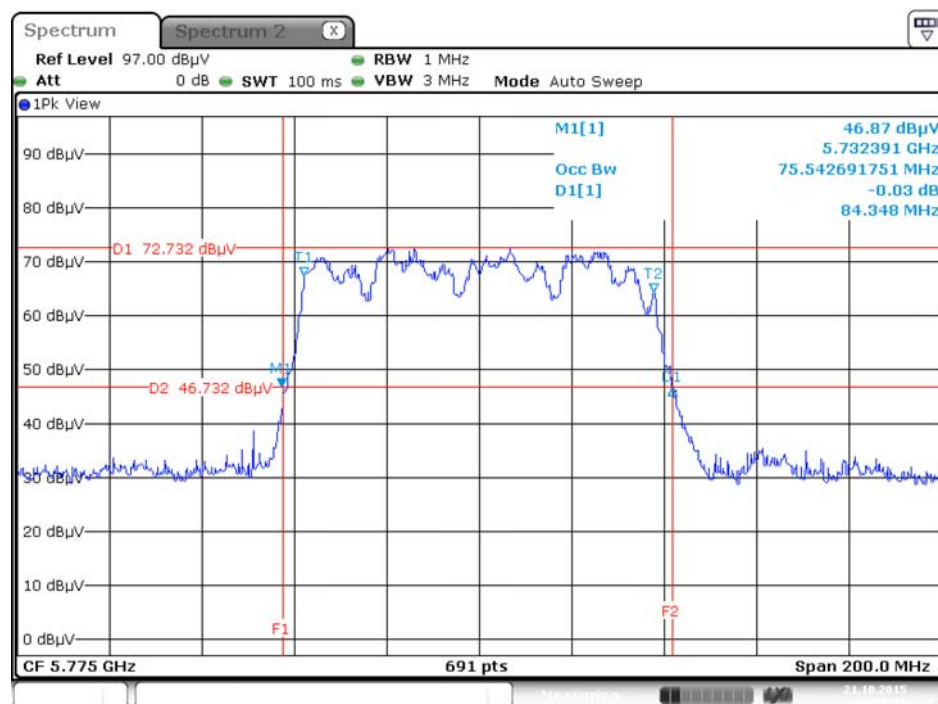

Date: 21.OCT.2015 00:26:32

4.3. 6dB Spectrum Bandwidth Measurement

4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	55%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	15.94	500	Complies
	5785 MHz	15.71	500	Complies
	5825 MHz	15.42	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	16.75	500	Complies
	5785 MHz	5.68	500	Complies
	5825 MHz	16.93	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	28.75	500	Complies
	5795 MHz	25.16	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	68.70	500	Complies

Temperature	25°C	Humidity	55%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		


Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	16.00	500	Complies
	5785 MHz	15.30	500	Complies
	5825 MHz	16.29	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	15.88	500	Complies
	5785 MHz	16.23	500	Complies
	5825 MHz	9.39	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	31.65	500	Complies
	5795 MHz	35.71	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	71.01	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5825 MHz

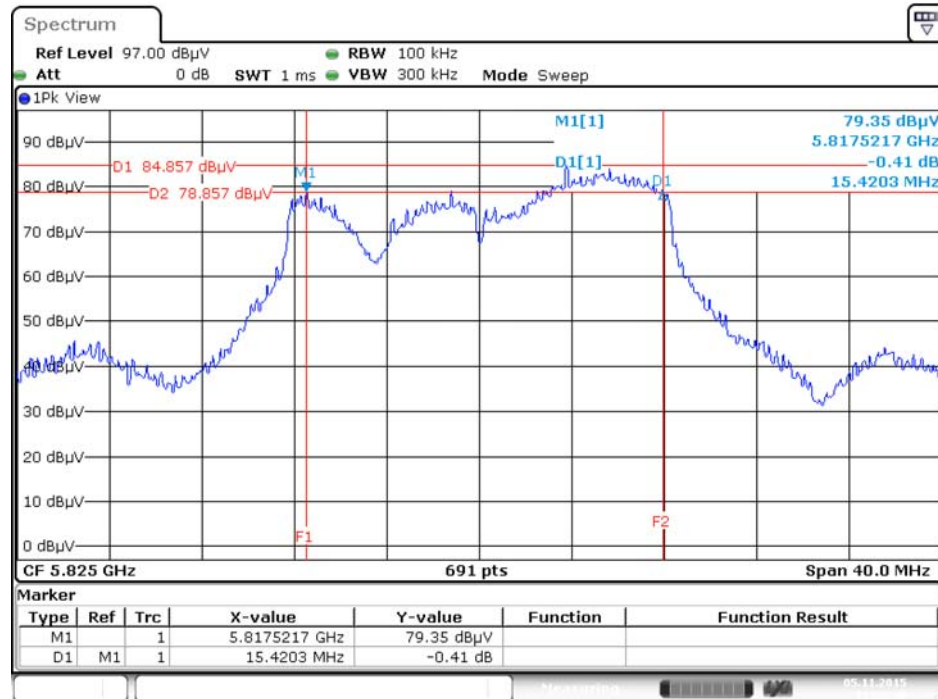


Date: 5.NOV.2015 11:30:48

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

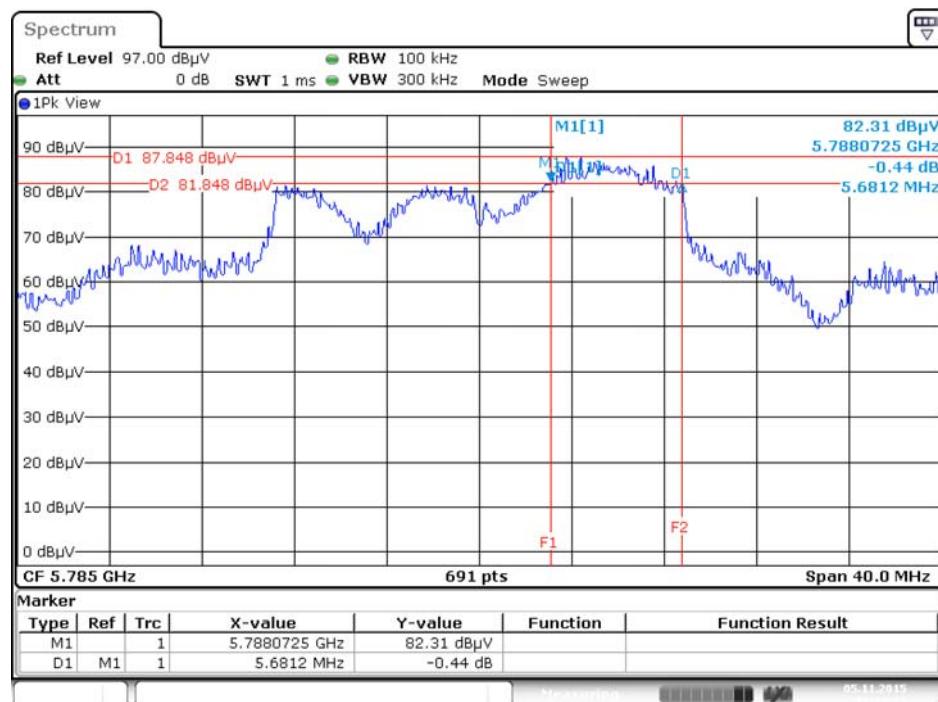


Date: 5.NOV.2015 11:33:33

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

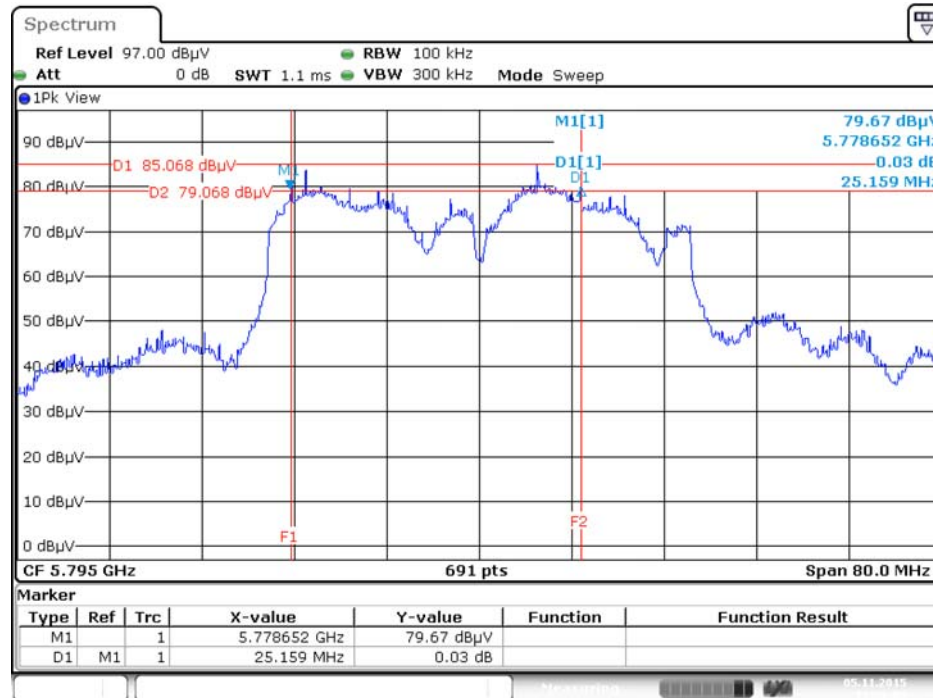

Date: 5.NOV.2015 11:36:03


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

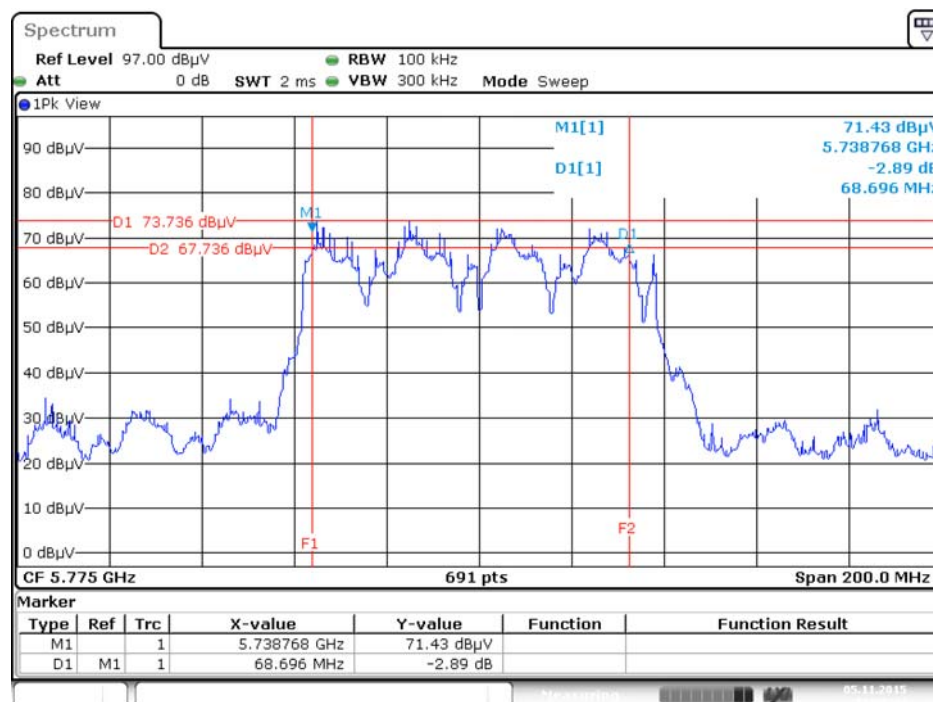

Date: 5.NOV.2015 11:28:44


Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

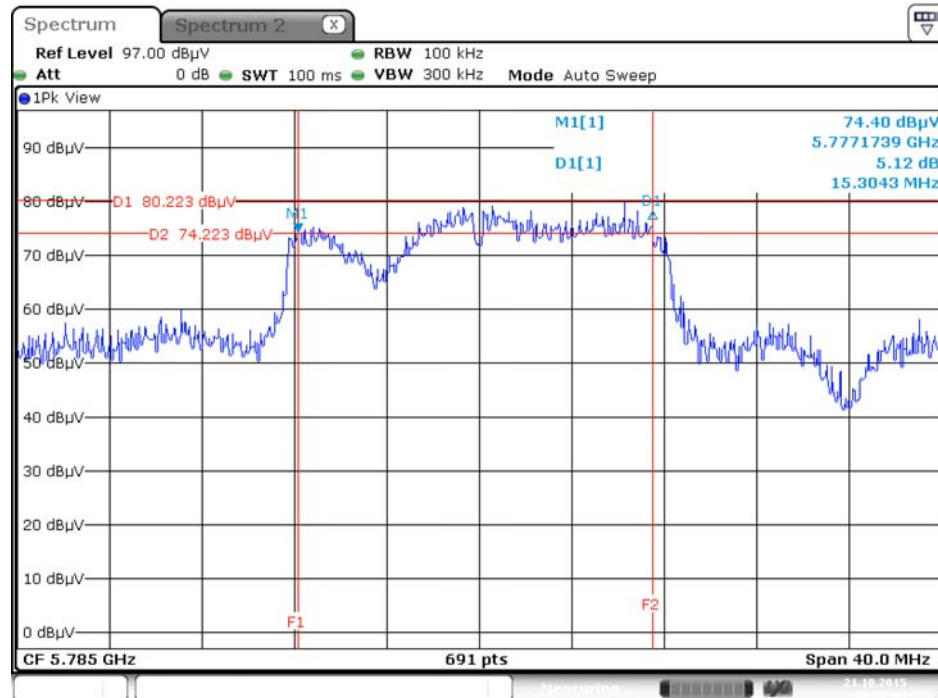


Date: 21.OCT.2015 00:28:43

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5825 MHz

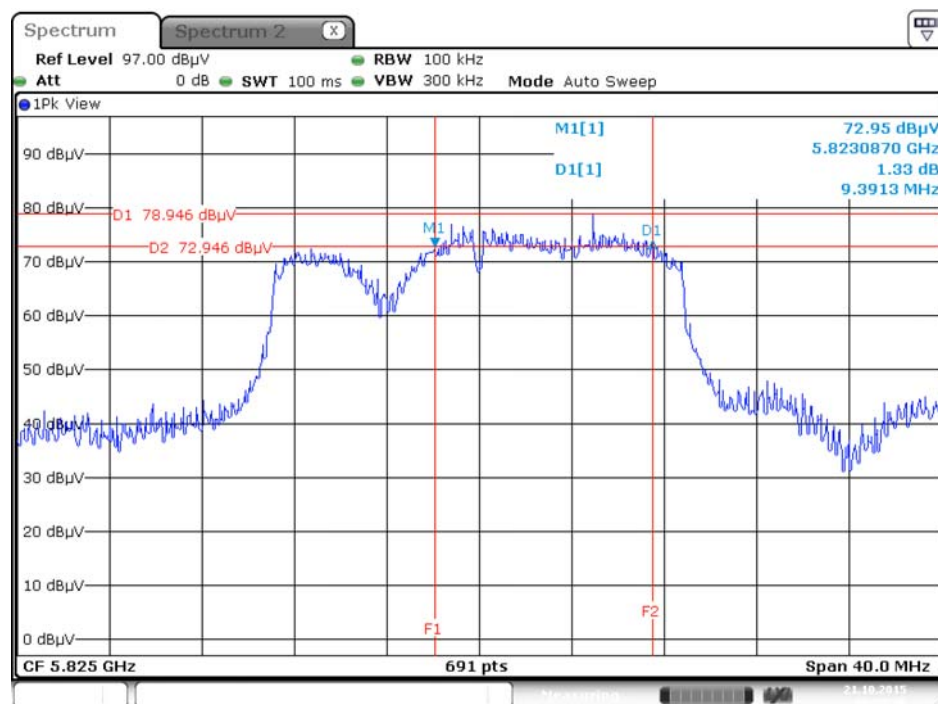


Date: 21.OCT.2015 00:30:46

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5755 MHz

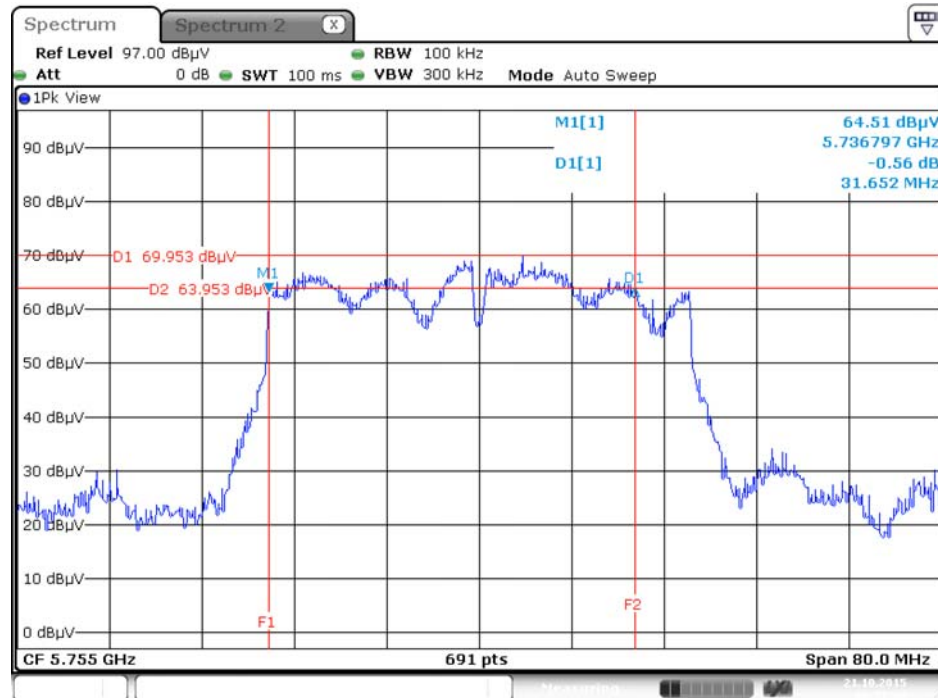

Date: 21.OCT.2015 00:31:35

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

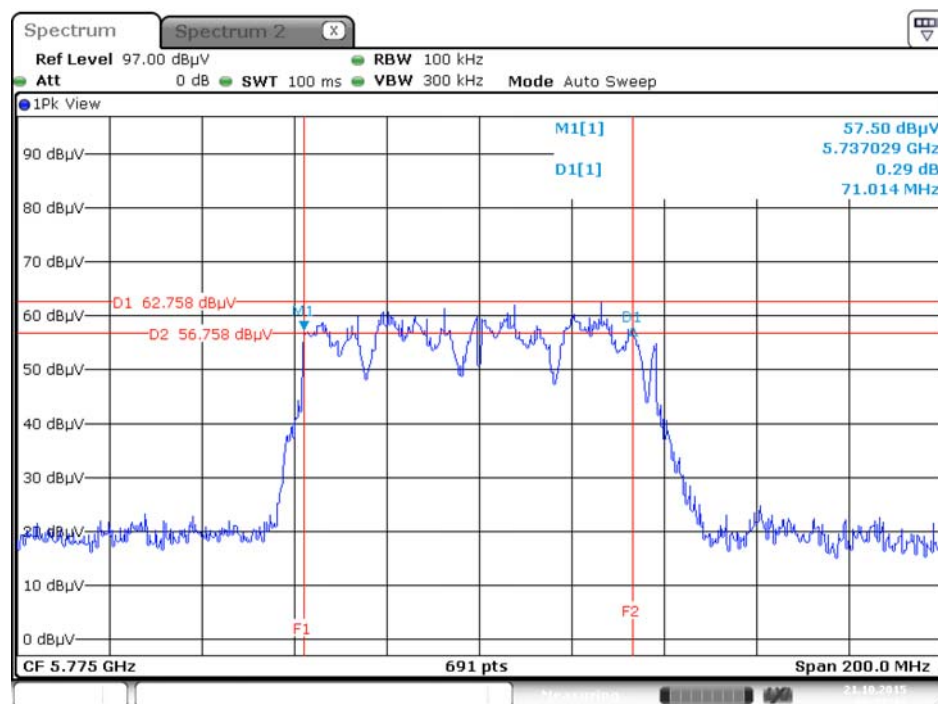

Date: 21.OCT.2015 00:32:41

4.4. Maximum Conducted Output Power Measurement

4.4.1. Limit

Frequency Band		Limit
☒	5.15~5.25 GHz	
	Operating Mode	
	☐ Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
	☒ Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
	☐ Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
	☐ Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

☒	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
-------------------------------------	----------------	--

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.4.4. Test Setup Layout



4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	55%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Oct. 26, 2015 ~ Nov. 05, 2015
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5180 MHz	17.69	18.97	17.89	18.59	24.34	30.00	Complies
	5200 MHz	18.81	19.72	18.73	19.28	25.17	30.00	Complies
	5240 MHz	18.65	19.77	18.83	18.96	25.09	30.00	Complies
	5745 MHz	16.58	17.64	17.93	17.92	23.57	30.00	Complies
	5785 MHz	21.38	21.66	21.75	21.94	27.71	30.00	Complies
	5825 MHz	18.56	19.35	19.56	19.22	25.21	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	18.05	19.05	18.13	18.63	24.50	30.00	Complies
	5200 MHz	19.79	19.59	18.67	19.28	25.37	30.00	Complies
	5240 MHz	18.47	19.63	18.74	19.21	25.06	30.00	Complies
	5745 MHz	16.72	17.79	17.97	18.01	23.67	30.00	Complies
	5785 MHz	21.18	22.16	22.34	22.06	27.98	30.00	Complies
	5825 MHz	18.37	19.18	19.42	19.13	25.06	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	14.52	15.38	14.89	14.85	20.94	30.00	Complies
	5230 MHz	19.91	20.93	20.22	20.24	26.36	30.00	Complies
	5755 MHz	14.53	15.46	15.76	15.89	21.46	30.00	Complies
	5795 MHz	17.52	18.34	18.34	18.43	24.19	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	11.35	12.56	11.89	11.23	17.81	30.00	Complies
	5775 MHz	11.14	12.02	12.14	12.38	17.97	30.00	Complies

Temperature	25°C	Humidity	55%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Oct. 20, 2015
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5180 MHz	17.24	17.06	17.23	16.80	23.11	30.00	Complies
	5200 MHz	18.49	18.37	18.85	18.21	24.51	30.00	Complies
	5240 MHz	18.32	18.39	18.58	18.18	24.39	30.00	Complies
	5745 MHz	16.22	16.38	16.29	16.21	22.30	30.00	Complies
	5785 MHz	21.44	21.88	21.03	21.37	27.46	30.00	Complies
	5825 MHz	19.72	19.76	19.41	19.39	25.59	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	18.47	17.96	18.21	17.88	24.16	30.00	Complies
	5200 MHz	18.49	18.09	18.19	17.85	24.18	30.00	Complies
	5240 MHz	18.21	18.06	18.12	17.85	24.08	30.00	Complies
	5745 MHz	17.92	17.81	17.91	17.81	23.88	30.00	Complies
	5785 MHz	23.16	23.02	22.13	22.82	28.82	30.00	Complies
	5825 MHz	21.05	20.89	20.52	20.25	26.71	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	14.52	14.25	14.44	14.12	20.36	30.00	Complies
	5230 MHz	18.59	18.57	18.70	18.26	24.55	30.00	Complies
	5755 MHz	14.82	14.90	14.61	14.70	20.78	30.00	Complies
	5795 MHz	18.23	18.28	17.91	17.95	24.12	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	9.74	9.62	9.66	9.63	15.68	30.00	Complies
	5775 MHz	10.25	10.29	10.04	10.10	16.19	30.00	Complies

4.5. Power Spectral Density Measurement

4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Band		Limit
☒	5.15~5.25 GHz	
	Operating Mode	
☐	Outdoor access point	17 dBm/MHz
☒	Indoor access point	17 dBm/MHz
☐	Fixed point-to-point access points	17 dBm/MHz
☐	Mobile and portable client devices	11 dBm/MHz
☒	5.725~5.85 GHz	30 dBm/500kHz

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.
5. For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should ≤ 30 dBm.

4.5.4. Test Setup Layout

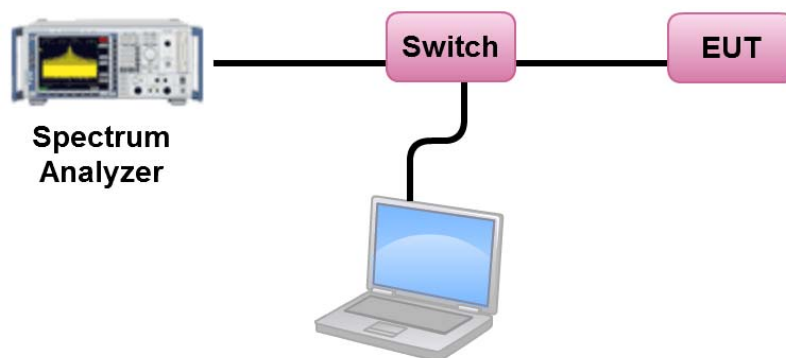

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	55%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Oct. 26, 2015 ~ Nov. 05, 2015
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	11.44	12.31	Complies
40	5200 MHz	12.25	12.31	Complies
48	5240 MHz	12.18	12.31	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, So Limit = 17-(10.69-6)=12.31 dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	10.32	-3.01	7.31	25.31	Complies
157	5785 MHz	14.54	-3.01	11.53	25.31	Complies
165	5825 MHz	12.25	-3.01	9.24	25.31	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, So Limit = 30-(10.69-6)=25.31 dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	11.50	12.31	Complies
40	5200 MHz	12.18	12.31	Complies
48	5240 MHz	12.24	12.31	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, So Limit = 17-(10.69-6)=12.31 dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	10.55	-3.01	7.54	25.31	Complies
157	5785 MHz	14.66	-3.01	11.65	25.31	Complies
165	5825 MHz	11.93	-3.01	8.92	25.31	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, So Limit = 30-(10.69-6)=25.31 dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	5.06	12.31	Complies
46	5230 MHz	10.35	12.31	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, So Limit = 17-(10.69-6)=12.31 dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	4.63	-3.01	1.62	25.31	Complies
159	5795 MHz	8.90	-3.01	5.89	25.31	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, So Limit = 30-(10.69-6)=25.31 dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-0.92	12.31	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, So Limit = 17-(10.69-6)= 12.31 dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	-1.49	-3.01	-4.50	25.31	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, So Limit = 30-(10.69-6)=25.31 dBm/500kHz.

Temperature	25°C	Humidity	55%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Oct. 20, 2015
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	9.94	11.27	Complies
40	5200 MHz	11.03	11.27	Complies
48	5240 MHz	10.91	11.27	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, So Limit = 17-(11.73-6)=11.27dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	9.22	-3.01	6.21	24.27	Complies
157	5785 MHz	14.24	-3.01	11.23	24.27	Complies
165	5825 MHz	12.30	-3.01	9.29	24.27	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, So Limit = 30-(11.73-6)=24.27dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	11.14	11.27	Complies
40	5200 MHz	11.17	11.27	Complies
48	5240 MHz	11.02	11.27	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, So Limit = 17-(11.73-6)=11.27dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	10.56	-3.01	7.55	24.27	Complies
157	5785 MHz	15.44	-3.01	12.43	24.27	Complies
165	5825 MHz	13.44	-3.01	10.43	24.27	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, So Limit = 30-(11.73-6)=24.27dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	4.26	11.27	Complies
46	5230 MHz	8.45	11.27	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, So Limit = 17-(11.73-6)=11.27dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	4.63	-3.01	1.62	24.27	Complies
159	5795 MHz	7.79	-3.01	4.78	24.27	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, So Limit = 30-(11.73-6)=24.27dBm/500kHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-3.55	11.27	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, So Limit = 17-(11.73-6)=11.27dBm/MHz.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	-3.09	-3.01	-6.10	24.27	Complies


Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, So Limit = 30-(11.73-6)=24.27dBm/500kHz.

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

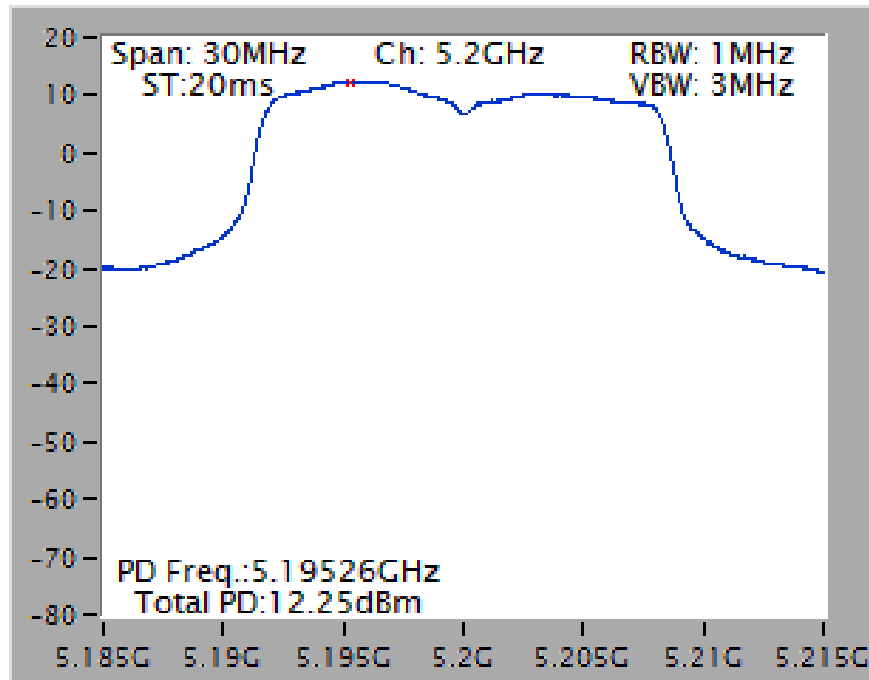


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

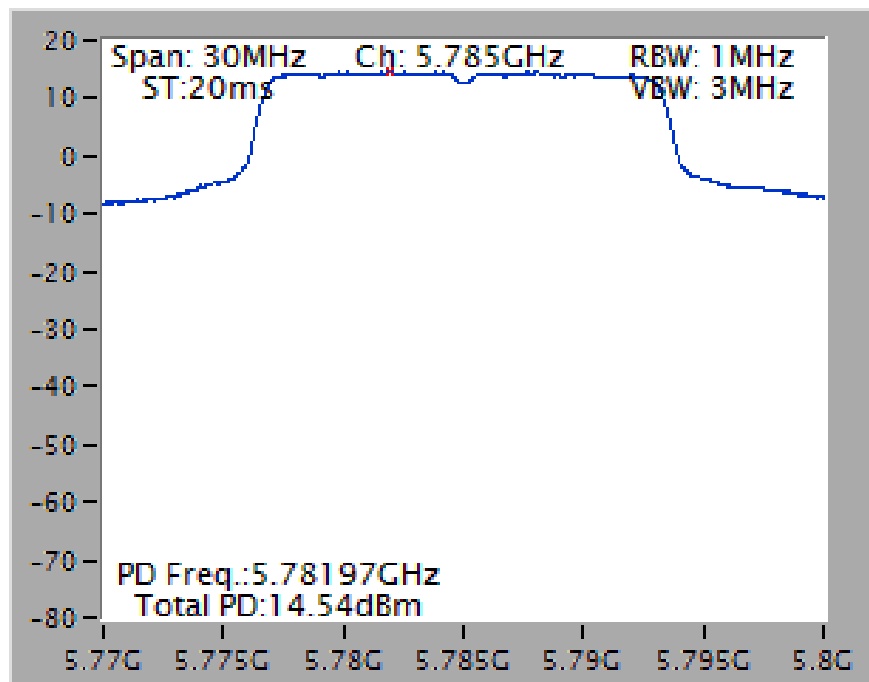


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

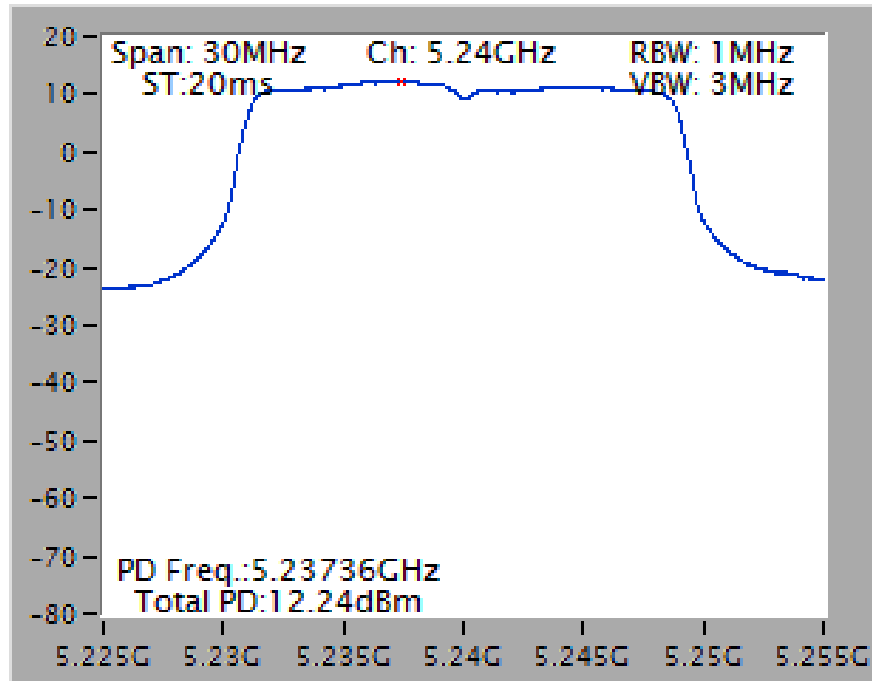


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

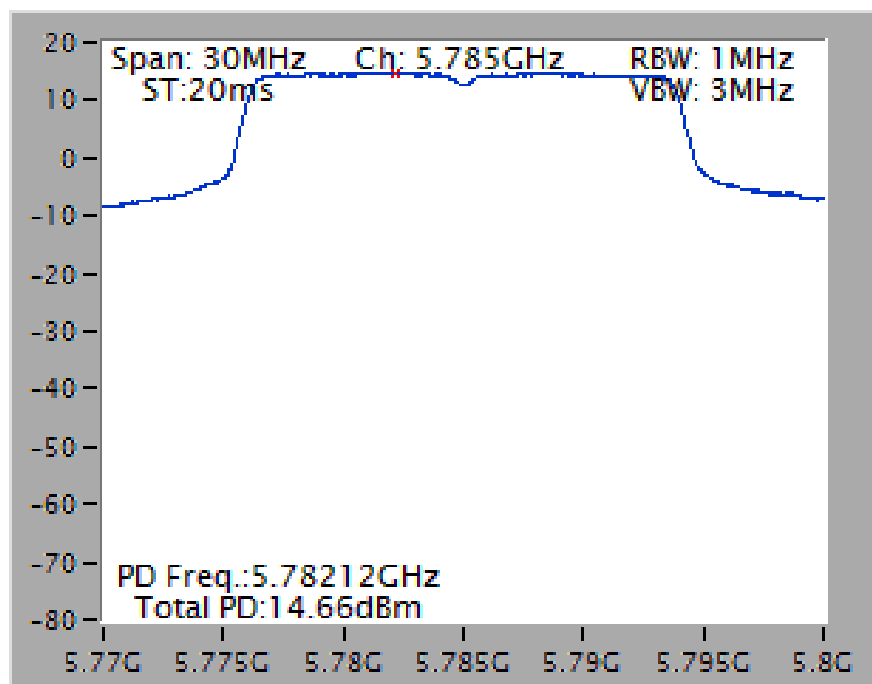


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

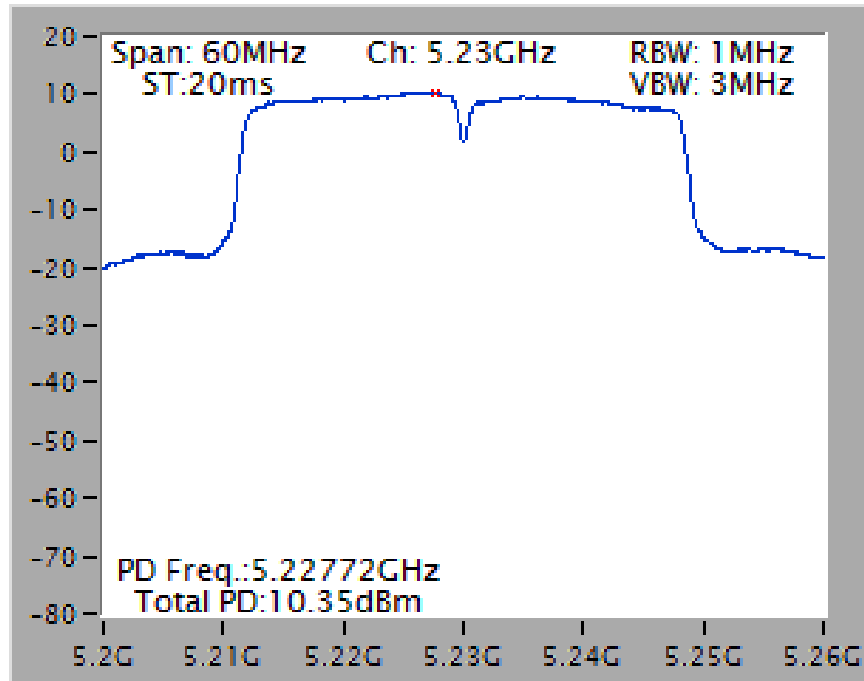


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

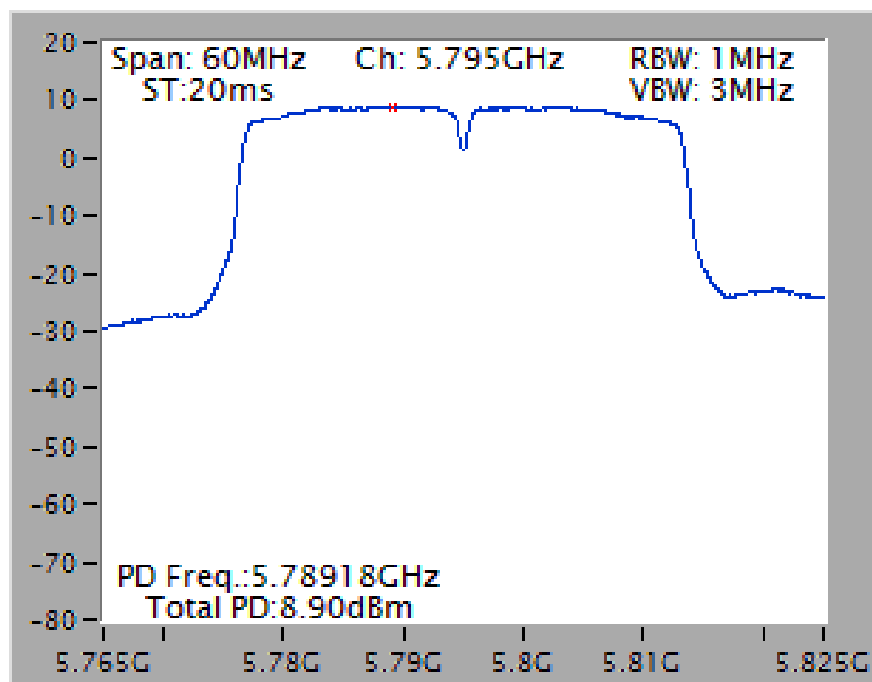

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

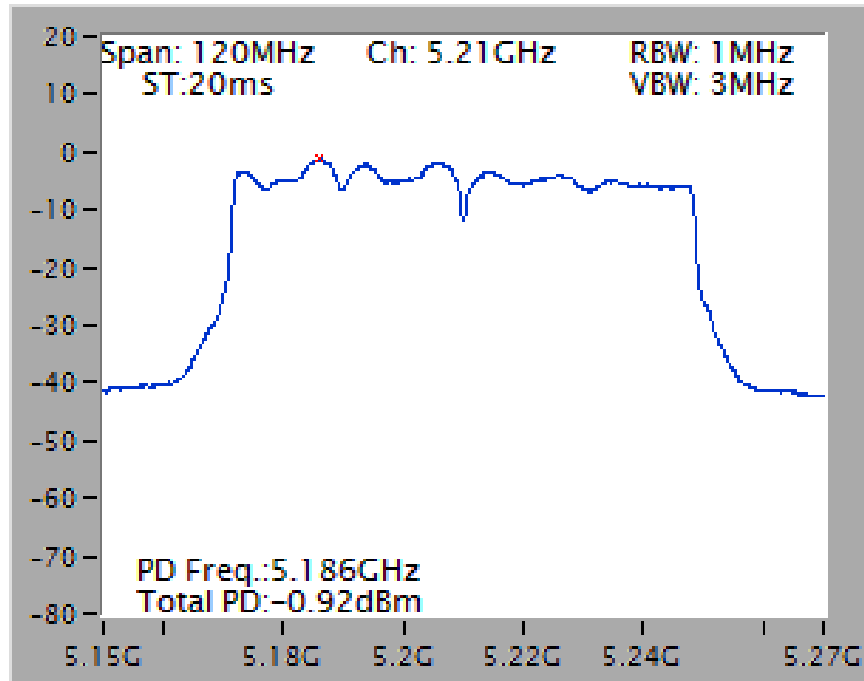


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

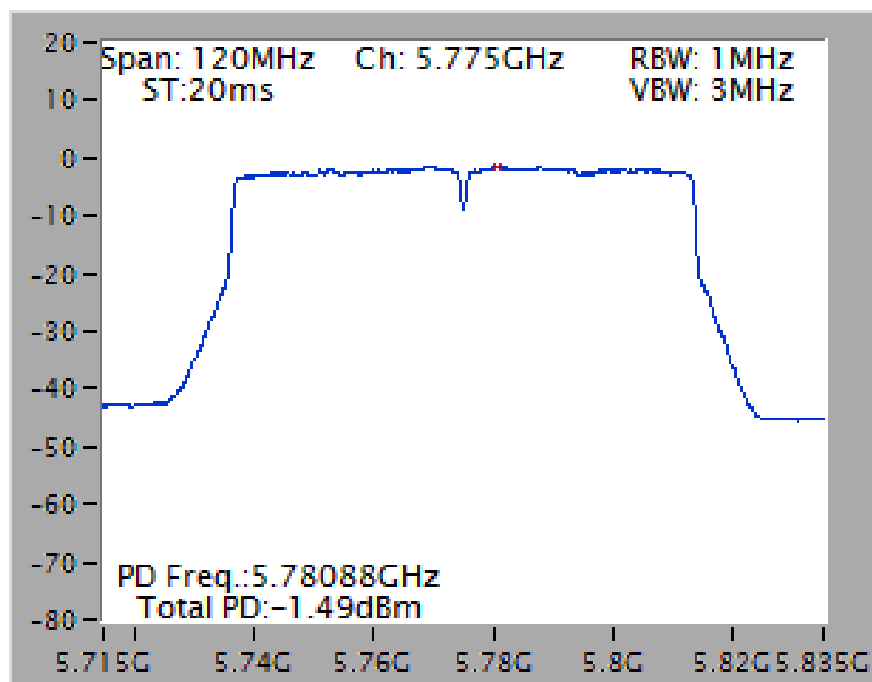


Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

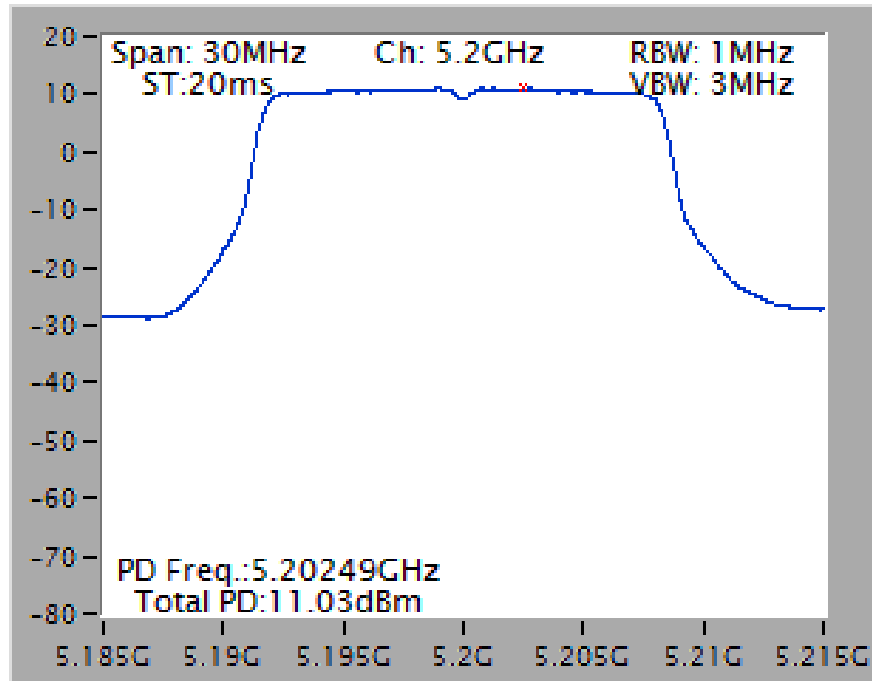


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

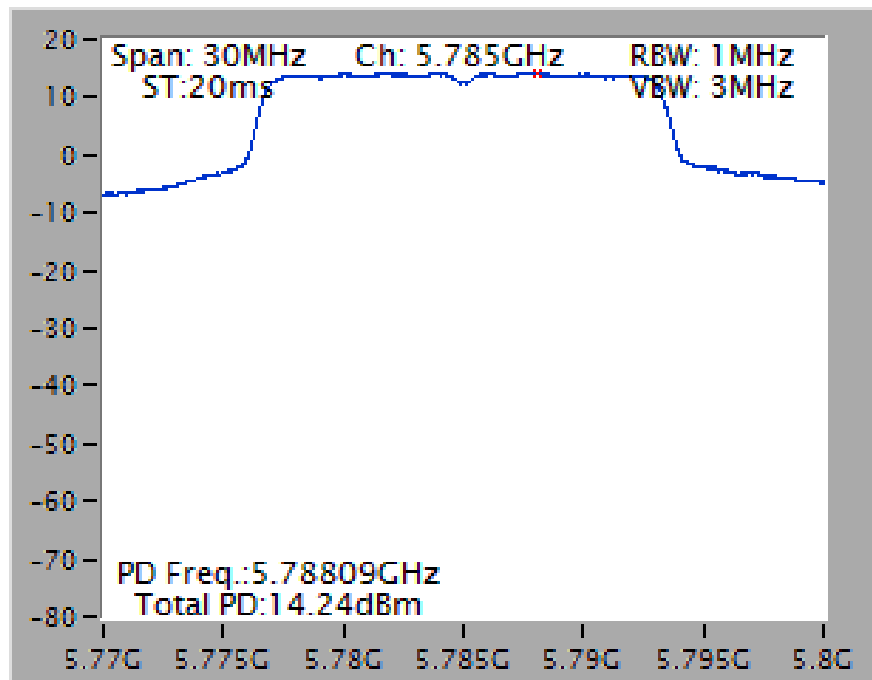


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

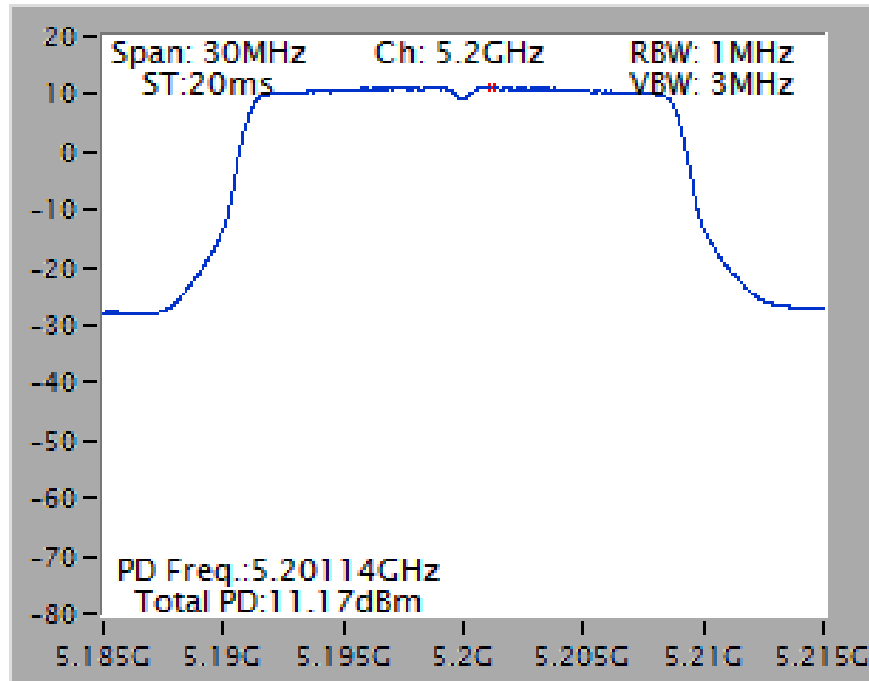


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5785 MHz

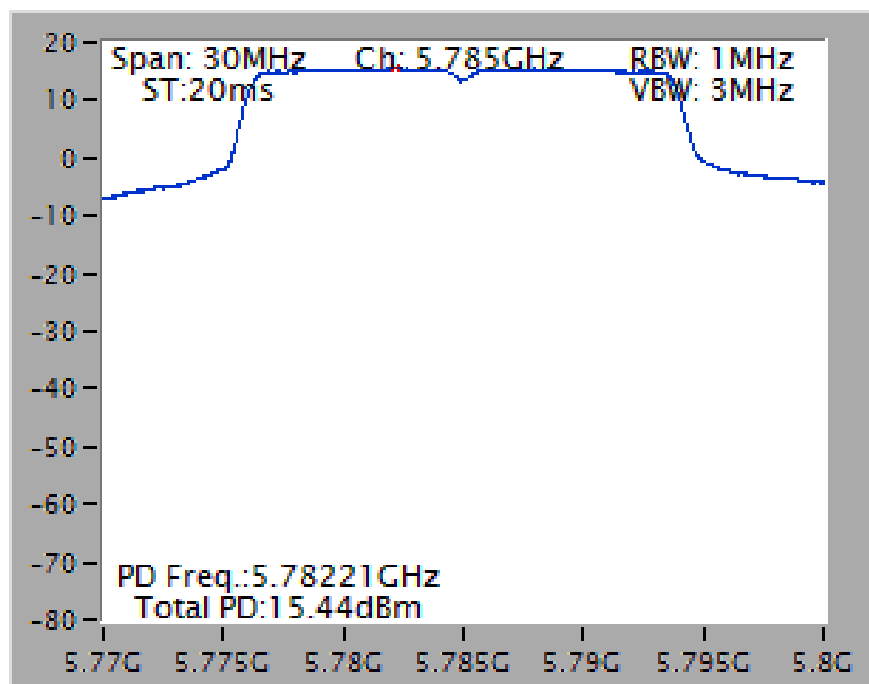


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

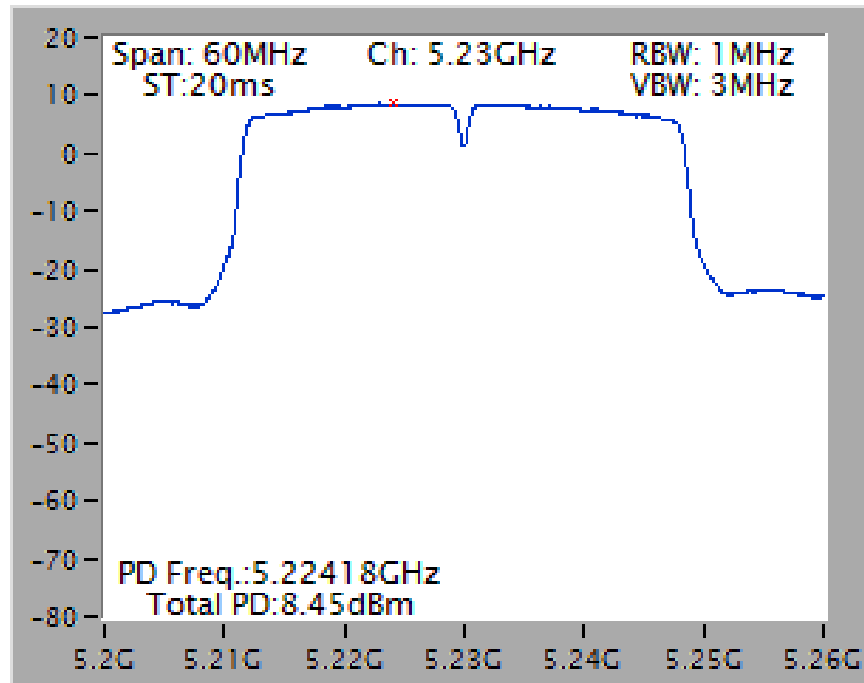


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5795 MHz

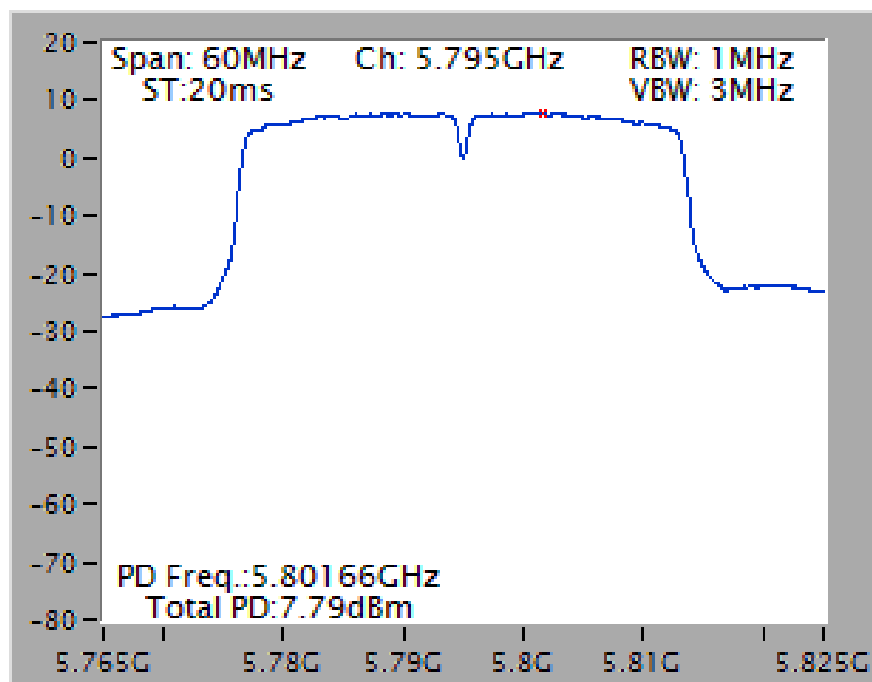

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

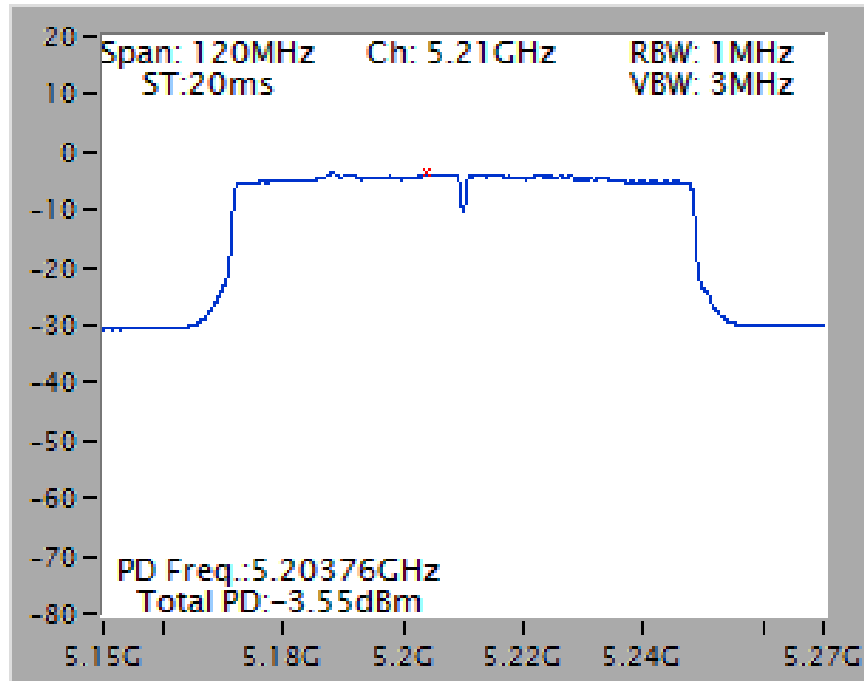

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5775 MHz

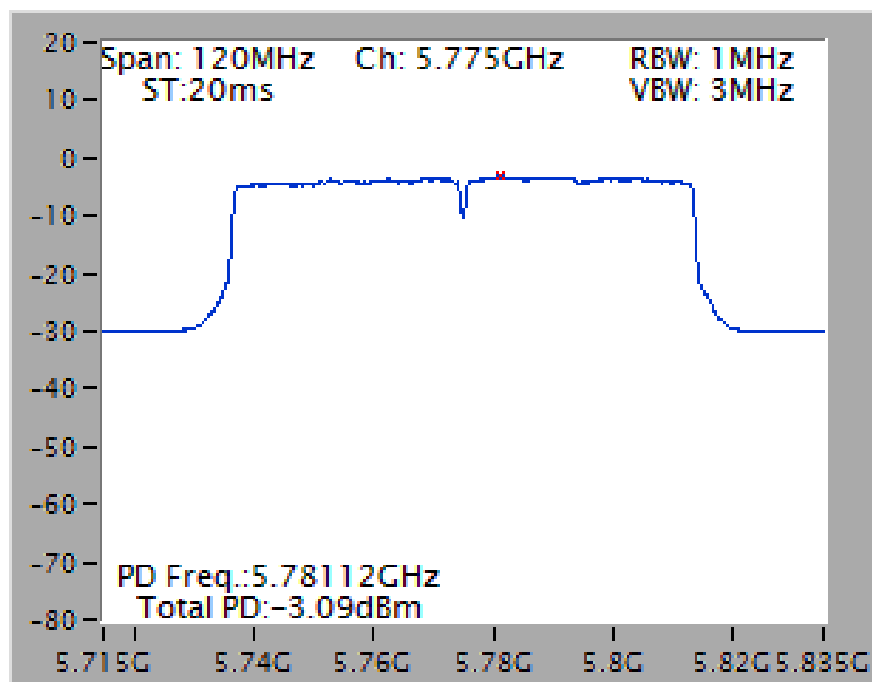

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

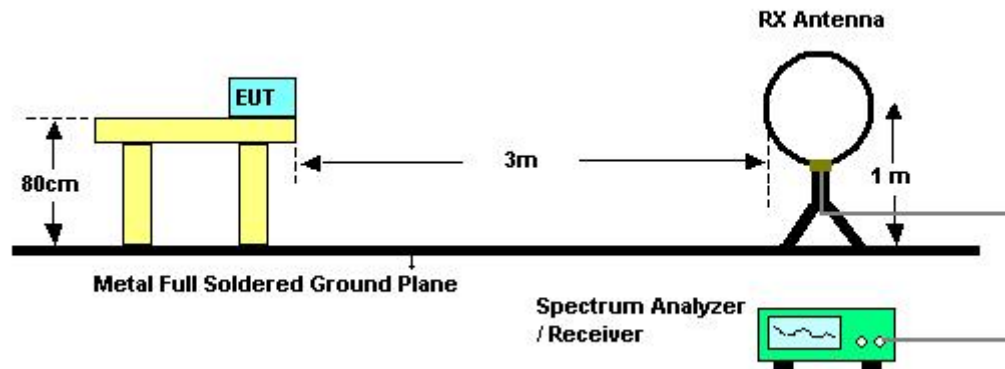

For Radiated Emissions: 30MHz~1GHz

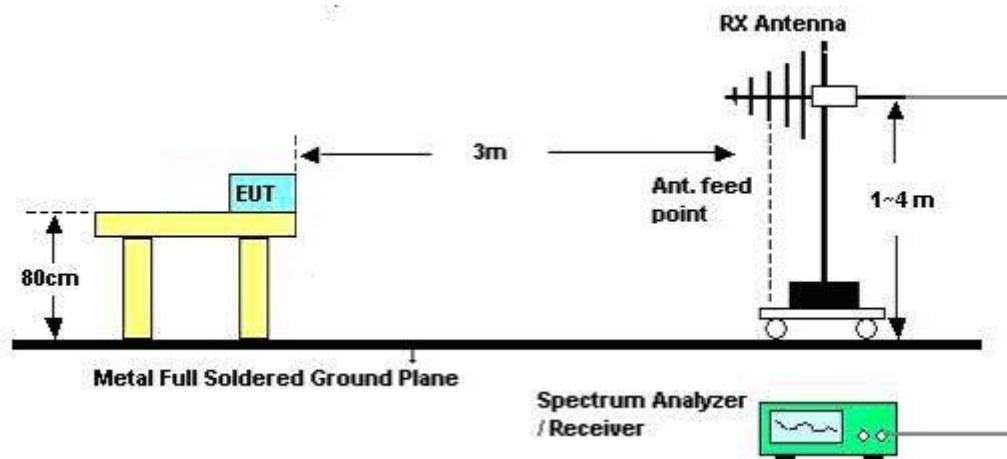

For Radiated Emissions: Above 1GHz

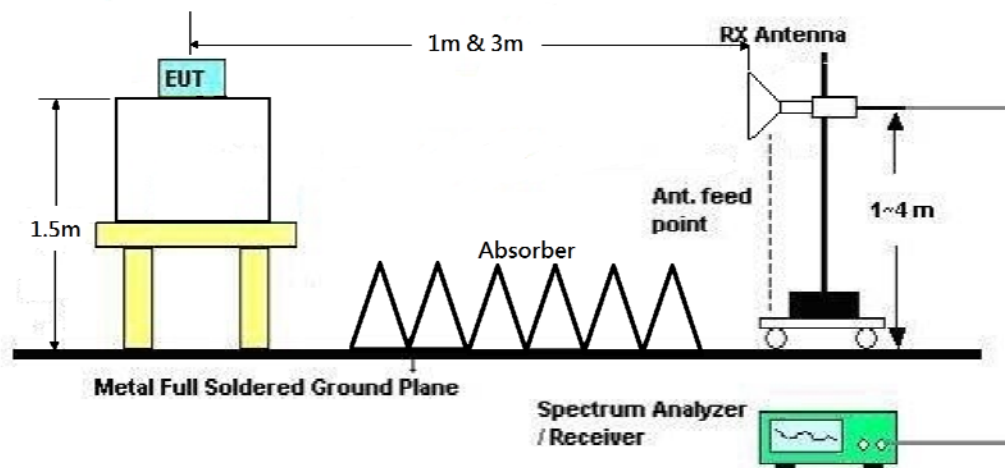

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	55%
Test Engineer	Akina Chiu	Configurations	Normal Link
Test Date	Mar. 02, 2016	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	55%
Test Engineer	Akina Chiu	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

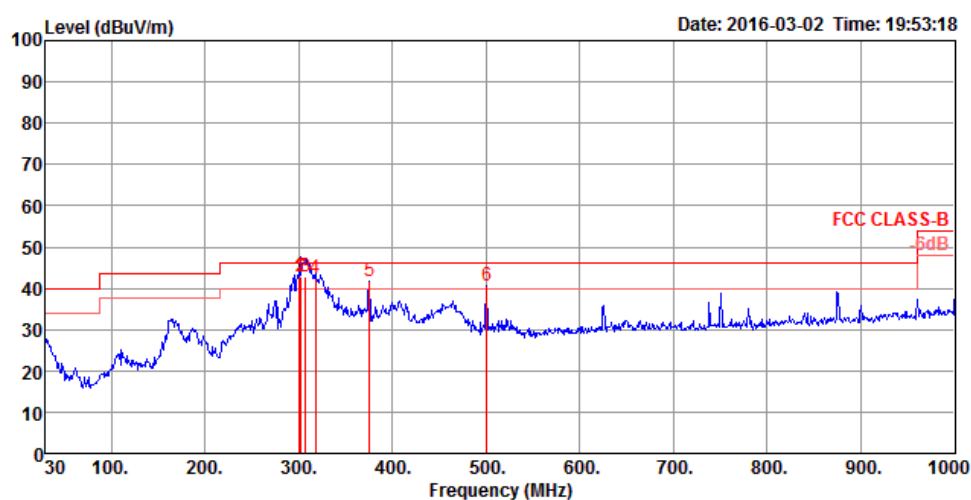

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	300.63	42.73	46.00	-3.27	53.53	1.48	20.00	32.28	150	254 QP	HORIZONTAL
2	302.57	42.98	46.00	-3.02	53.71	1.49	20.06	32.28	150	245 QP	HORIZONTAL
3	307.42	42.79	46.00	-3.21	53.35	1.50	20.22	32.28	100	247 QP	HORIZONTAL
4	318.09	42.38	46.00	-3.62	52.63	1.53	20.51	32.29	150	263 QP	HORIZONTAL
5	375.32	41.57	46.00	-4.43	50.14	1.67	22.08	32.32	100	29 Peak	HORIZONTAL
6	500.45	40.46	46.00	-5.54	46.84	1.94	24.03	32.35	100	181 Peak	HORIZONTAL

Vertical

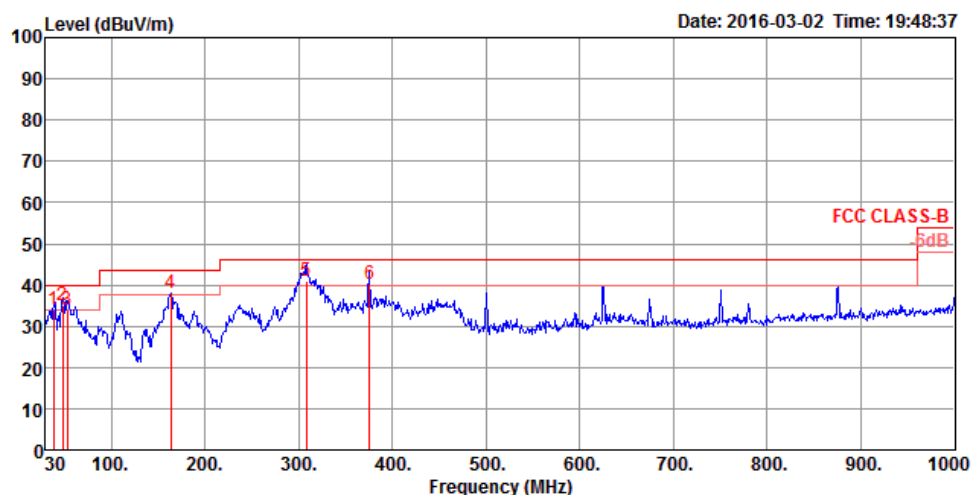

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	38.73	33.89	40.00	-6.11	44.83	0.54	20.93	32.41	100	94 QP	VERTICAL
2	48.43	34.94	40.00	-5.06	51.18	0.61	15.56	32.41	100	133 QP	VERTICAL
3	53.28	34.03	40.00	-5.97	51.32	0.64	14.48	32.41	100	245 QP	VERTICAL
4	163.86	37.84	43.50	-5.66	52.31	1.10	16.78	32.35	100	168 Peak	VERTICAL
5	308.39	41.09	46.00	-4.91	51.62	1.50	20.25	32.28	100	326 QP	VERTICAL
6	375.32	40.06	46.00	-5.94	48.63	1.67	22.08	32.32	200	0 QP	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	
1	15542.36	56.85	74.00	-17.15	43.03	10.77	38.25	35.20	Peak	161	170	HORIZONTAL
2	15542.39	44.20	54.00	-9.80	30.38	10.77	38.25	35.20	Average	161	170	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	
1	15539.52	44.07	54.00	-9.93	30.25	10.77	38.25	35.20	Average	154	268	VERTICAL
2	15542.21	56.86	74.00	-17.14	43.04	10.77	38.25	35.20	Peak	154	268	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15595.86	44.33	54.00	-9.67	30.61	10.78	38.16	35.22	Average	158	113
2	15601.53	57.51	74.00	-16.49	43.81	10.78	38.16	35.24	Peak	158	113

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15602.55	57.73	74.00	-16.27	44.03	10.78	38.16	35.24	Peak	185	182
2	15603.14	44.19	54.00	-9.81	30.49	10.78	38.16	35.24	Average	185	182

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15717.21	56.59	74.00	-17.41	43.09	10.79	37.99	35.28	Peak	179	144
2	15718.47	44.09	54.00	-9.91	30.59	10.79	37.99	35.28	Average	179	144

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15721.45	43.99	54.00	-10.01	30.49	10.79	37.99	35.28	Average	166	89
2	15723.81	56.69	74.00	-17.31	43.19	10.79	37.99	35.28	Peak	166	89

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11488.82	54.80	74.00	-19.20	41.28	9.24	39.08	34.80	Peak	197	194	HORIZONTAL
2	11490.36	42.53	54.00	-11.47	29.01	9.24	39.08	34.80	Average	197	194	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11492.03	45.75	54.00	-8.25	32.23	9.24	39.08	34.80	Average	234	123	VERTICAL
2	11492.89	59.08	74.00	-14.92	45.56	9.24	39.08	34.80	Peak	234	123	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11559.36	55.75	74.00	-18.25	42.17	9.26	39.13	34.81	Peak	206	138 HORIZONTAL
2	11571.16	45.61	54.00	-8.39	32.03	9.26	39.14	34.82	Average	206	138 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11571.59	60.86	74.00	-13.14	47.28	9.26	39.14	34.82	Peak	211	262 VERTICAL
2	11572.17	48.42	54.00	-5.58	34.84	9.26	39.14	34.82	Average	211	262 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11641.10	42.94	54.00	-11.06	29.31	9.28	39.18	34.83	Average	205	135	HORIZONTAL
2	11653.69	55.38	74.00	-18.62	41.75	9.28	39.19	34.84	Peak	205	135	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11645.66	56.79	74.00	-17.21	43.16	9.28	39.18	34.83	Peak	236	10	VERTICAL
2	11652.53	44.50	54.00	-9.50	30.87	9.28	39.19	34.84	Average	236	10	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15539.96	56.80	74.00	-17.20	42.98	10.77	38.25	35.20	Peak	152	140
2	15540.50	43.57	54.00	-10.43	29.75	10.77	38.25	35.20	Average	152	140

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15539.85	57.39	74.00	-16.61	43.57	10.77	38.25	35.20	Peak	150	238
2	15540.14	44.47	54.00	-9.53	30.65	10.77	38.25	35.20	Average	150	238

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15599.90	43.52	54.00	-10.48	29.82	10.78	38.16	35.24	Average	187	104	HORIZONTAL
2	15600.25	56.63	74.00	-17.37	42.93	10.78	38.16	35.24	Peak	187	104	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15600.08	44.23	54.00	-9.77	30.53	10.78	38.16	35.24	Average	156	286	VERTICAL
2	15600.20	57.37	74.00	-16.63	43.67	10.78	38.16	35.24	Peak	156	286	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15719.91	56.45	74.00	-17.55	42.95	10.79	37.99	35.28	Peak	187	142
2	15720.40	43.14	54.00	-10.86	29.64	10.79	37.99	35.28	Average	187	142

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15719.89	57.15	74.00	-16.85	43.65	10.79	37.99	35.28	Peak	157	277
2	15720.34	43.98	54.00	-10.02	30.48	10.79	37.99	35.28	Average	157	277

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11489.51	54.36	74.00	-19.64	40.84	9.24	39.08	34.80	Peak	174	276 HORIZONTAL
2	11490.28	41.15	54.00	-12.85	27.63	9.24	39.08	34.80	Average	174	276 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11494.34	56.31	74.00	-17.69	42.79	9.24	39.08	34.80	Peak	165	147 VERTICAL
2	11495.28	44.44	54.00	-9.56	30.92	9.24	39.08	34.80	Average	165	147 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11569.65	41.91	54.00	-12.09	28.32	9.26	39.14	34.81	221	261	HORIZONTAL
2	11569.87	54.47	74.00	-19.53	40.89	9.26	39.14	34.82	221	261	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11575.43	60.49	74.00	-13.51	46.91	9.26	39.14	34.82	182	58	VERTICAL
2	11575.72	47.59	54.00	-6.41	34.01	9.26	39.14	34.82	182	58	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11649.91	54.55	74.00	-19.45	40.93	9.28	39.18	34.84	Peak	150	222 HORIZONTAL
2	11649.96	41.63	54.00	-12.37	28.01	9.28	39.18	34.84	Average	150	222 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11649.73	57.12	74.00	-16.88	43.50	9.28	39.18	34.84	Peak	197	95 VERTICAL
2	11649.74	43.80	54.00	-10.20	30.18	9.28	39.18	34.84	Average	197	95 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15569.98	56.69	74.00	-17.31	42.92	10.78	38.20	35.21	Peak	150	256	HORIZONTAL
2	15570.32	43.29	54.00	-10.71	29.52	10.78	38.20	35.21	Average	150	256	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15569.72	57.16	74.00	-16.84	43.39	10.78	38.20	35.21	Peak	150	82	VERTICAL
2	15569.89	43.75	54.00	-10.25	29.98	10.78	38.20	35.21	Average	150	82	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15689.77	43.04	54.00	-10.96	29.49	10.79	38.03	35.27	Average	150	251 HORIZONTAL
2	15690.41	56.32	74.00	-17.68	42.77	10.79	38.03	35.27	Peak	150	251 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15689.68	55.73	74.00	-18.27	42.18	10.79	38.03	35.27	Peak	150	147 VERTICAL
2	15690.12	42.72	54.00	-11.28	29.17	10.79	38.03	35.27	Average	150	147 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11509.81	54.35	74.00	-19.65	40.80	9.25	39.10	34.80	Peak	150	174 HORIZONTAL
2	11510.18	41.68	54.00	-12.32	28.13	9.25	39.10	34.80	Average	150	174 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11509.88	40.97	54.00	-13.03	27.42	9.25	39.10	34.80	Average	150	334 VERTICAL
2	11510.48	55.36	74.00	-18.64	41.81	9.25	39.10	34.80	Peak	150	334 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11589.64	41.97	54.00	-12.03	28.37	9.27	39.15	34.82	150	253	HORIZONTAL
2	11589.73	55.09	74.00	-18.91	41.49	9.27	39.15	34.82	150	253	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11589.91	54.68	74.00	-19.32	41.08	9.27	39.15	34.82	161	249	VERTICAL
2	11590.25	41.54	54.00	-12.46	27.94	9.27	39.15	34.82	161	249	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15629.79	56.77	74.00	-17.23	43.13	10.78	38.11	35.25	Peak	150	261	HORIZONTAL
2	15630.20	43.34	54.00	-10.66	29.70	10.78	38.11	35.25	Average	150	261	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15630.00	42.50	54.00	-11.50	28.86	10.78	38.11	35.25	Average	150	151	VERTICAL
2	15630.15	55.92	74.00	-18.08	42.28	10.78	38.11	35.25	Peak	150	151	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11550.10	54.53	74.00	-19.47	40.95	9.26	39.13	34.81	Peak	150	186	HORIZONTAL
2	11550.21	41.76	54.00	-12.24	28.18	9.26	39.13	34.81	Average	150	186	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11549.58	41.37	54.00	-12.63	27.79	9.26	39.13	34.81	Average	150	268	VERTICAL
2	11549.84	54.20	74.00	-19.80	40.62	9.26	39.13	34.81	Peak	150	268	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15539.83	42.97	54.00	-11.03	29.15	10.77	38.25	35.20	Average	150	56 HORIZONTAL
2	15543.53	56.57	74.00	-17.43	42.76	10.78	38.23	35.20	Peak	150	56 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15544.66	43.20	54.00	-10.80	29.39	10.78	38.23	35.20	Average	163	232 VERTICAL
2	15547.79	57.30	74.00	-16.70	43.50	10.78	38.23	35.21	Peak	163	232 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	15597.68	55.68	74.00	-18.32	41.96	10.78	38.16	35.22	Peak	211	153 HORIZONTAL
2	15601.68	42.37	54.00	-11.63	28.67	10.78	38.16	35.24	Average	211	153 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	15601.82	55.01	74.00	-18.99	41.31	10.78	38.16	35.24	Peak	181	147 VERTICAL
2	15605.09	42.31	54.00	-11.69	28.61	10.78	38.16	35.24	Average	181	147 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	15718.44	42.38	54.00	-11.62	28.88	10.79	37.99	35.28	Average	153	288 HORIZONTAL
2	15721.79	55.23	74.00	-18.77	41.73	10.79	37.99	35.28	Peak	153	288 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	15721.59	55.74	74.00	-18.26	42.24	10.79	37.99	35.28	Peak	190	62 VERTICAL
2	15724.60	43.21	54.00	-10.79	29.71	10.79	37.99	35.28	Average	190	62 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11495.99	42.77	54.00	-11.23	29.25	9.24	39.08	34.80	Average	199	298 HORIZONTAL
2	11496.45	55.09	74.00	-18.91	41.57	9.24	39.08	34.80	Peak	199	298 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11483.05	40.86	54.00	-13.14	27.34	9.24	39.08	34.80	Average	172	223 VERTICAL
2	11491.56	53.96	74.00	-20.04	40.44	9.24	39.08	34.80	Peak	172	223 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11573.01	46.23	54.00	-7.77	32.65	9.26	39.14	34.82	Average	164	317 HORIZONTAL
2	11573.10	58.85	74.00	-15.15	45.27	9.26	39.14	34.82	Peak	164	317 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11567.95	41.75	54.00	-12.25	28.16	9.26	39.14	34.81	Average	158	30 VERTICAL
2	11568.18	53.93	74.00	-20.07	40.34	9.26	39.14	34.81	Peak	158	30 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11650.14	45.17	54.00	-8.83	31.55	9.28	39.18	34.84 Average	179	276	HORIZONTAL
2	11651.04	57.08	74.00	-16.92	43.45	9.28	39.19	34.84 Peak	179	276	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11645.69	41.35	54.00	-12.65	27.72	9.28	39.18	34.83 Average	166	176	VERTICAL
2	11645.72	54.04	74.00	-19.96	40.41	9.28	39.18	34.83 Peak	166	176	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15541.82	55.96	74.00	-18.04	42.14	10.77	38.25	35.20	Peak	183	104
2	15542.46	43.41	54.00	-10.59	29.59	10.77	38.25	35.20	Average	183	104

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	
1	15539.13	56.57	74.00	-17.43	42.75	10.77	38.25	35.20	Peak	180	305	VERTICAL
2	15539.15	43.37	54.00	-10.63	29.55	10.77	38.25	35.20	Average	180	305	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15598.44	43.49	54.00	-10.51	29.77	10.78	38.16	35.22	166	79	HORIZONTAL
2	15602.44	56.24	74.00	-17.76	42.54	10.78	38.16	35.24	166	79	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15598.07	43.28	54.00	-10.72	29.56	10.78	38.16	35.22	181	316	VERTICAL
2	15598.13	56.15	74.00	-17.85	42.43	10.78	38.16	35.22	181	316	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15719.19	56.55	74.00	-17.45	43.05	10.79	37.99	35.28	Peak	179	91 HORIZONTAL
2	15722.06	43.35	54.00	-10.65	29.85	10.79	37.99	35.28	Average	179	91 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15719.09	56.57	74.00	-17.43	43.07	10.79	37.99	35.28	Peak	182	329 VERTICAL
2	15722.25	43.34	54.00	-10.66	29.84	10.79	37.99	35.28	Average	182	329 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11487.79	56.58	74.00	-17.42	43.06	9.24	39.08	34.80	Peak	224	301 HORIZONTAL
2	11489.41	42.79	54.00	-11.21	29.27	9.24	39.08	34.80	Average	224	301 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11488.92	41.42	54.00	-12.58	27.90	9.24	39.08	34.80	Average	240	340 VERTICAL
2	11490.96	54.38	74.00	-19.62	40.86	9.24	39.08	34.80	Peak	240	340 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11569.04	58.44	74.00	-15.56	44.85	9.26	39.14	34.81	Peak	246	309 HORIZONTAL
2	11569.80	45.87	54.00	-8.13	32.29	9.26	39.14	34.82	Average	246	309 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11570.98	56.47	74.00	-17.53	42.89	9.26	39.14	34.82	Peak	237	354 VERTICAL
2	11572.26	43.66	54.00	-10.34	30.08	9.26	39.14	34.82	Average	237	354 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11649.65	59.62	74.00	-14.38	46.00	9.28	39.18	34.84	Peak	249	303 HORIZONTAL
2	11650.08	44.67	54.00	-9.33	31.05	9.28	39.18	34.84	Average	249	303 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11647.78	55.78	74.00	-18.22	42.16	9.28	39.18	34.84	Peak	236	336 VERTICAL
2	11649.05	42.66	54.00	-11.34	29.04	9.28	39.18	34.84	Average	236	336 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15570.83	43.22	54.00	-10.78	29.45	10.78	38.20	35.21	Average	180	97 HORIZONTAL
2	15571.24	56.51	74.00	-17.49	42.74	10.78	38.20	35.21	Peak	180	97 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15567.68	55.61	74.00	-18.39	41.84	10.78	38.20	35.21	Peak	180	315 VERTICAL
2	15570.28	43.20	54.00	-10.80	29.43	10.78	38.20	35.21	Average	180	315 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	dB	cm	deg
1	15691.22	43.18	54.00	-10.82	29.63	10.79	38.03	35.27	Average	180	89 HORIZONTAL
2	15692.03	55.92	74.00	-18.08	42.37	10.79	38.03	35.27	Peak	180	89 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	dB	cm	deg
1	15688.31	43.29	54.00	-10.71	29.74	10.79	38.03	35.27	Average	182	342 VERTICAL
2	15689.10	56.55	74.00	-17.45	43.00	10.79	38.03	35.27	Peak	182	342 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11509.96	42.00	54.00	-12.00	28.45	9.25	39.10	34.80	Average	220	299 HORIZONTAL
2	11510.21	54.83	74.00	-19.17	41.28	9.25	39.10	34.80	Peak	220	299 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11509.07	41.35	54.00	-12.65	27.80	9.25	39.10	34.80	Average	225	315 VERTICAL
2	11509.88	54.61	74.00	-19.39	41.06	9.25	39.10	34.80	Peak	225	315 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	dB	cm	deg
1	11589.12	43.51	54.00	-10.49	29.91	9.27	39.15	34.82	Average	213	313 HORIZONTAL
2	11589.20	56.05	74.00	-17.95	42.45	9.27	39.15	34.82	Peak	213	313 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	dB	cm	deg
1	11589.47	41.72	54.00	-12.28	28.12	9.27	39.15	34.82	Average	215	349 VERTICAL
2	11590.02	55.10	74.00	-18.90	41.50	9.27	39.15	34.82	Peak	215	349 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	dB	cm	deg
1	15631.27	56.15	74.00	-17.85	42.51	10.78	38.11	35.25	Peak	190	87 HORIZONTAL
2	15631.32	43.33	54.00	-10.67	29.69	10.78	38.11	35.25	Average	190	87 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	dB	cm	deg
1	15629.61	56.53	74.00	-17.47	42.89	10.78	38.11	35.25	Peak	187	314 VERTICAL
2	15632.16	43.25	54.00	-10.75	29.61	10.78	38.11	35.25	Average	187	314 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11549.62	41.63	54.00	-12.37	28.05	9.26	39.13	34.81	223	316	HORIZONTAL
2	11552.15	54.82	74.00	-19.18	41.24	9.26	39.13	34.81	223	316	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11548.29	54.50	74.00	-19.50	40.93	9.26	39.12	34.81	231	288	VERTICAL
2	11549.62	41.76	54.00	-12.24	28.18	9.26	39.13	34.81	231	288	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 23, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	52.95	54.00	-1.05	47.78	6.13	34.04	35.00	Average	183	232 VERTICAL
2	5150.00	66.42	74.00	-7.58	61.25	6.13	34.04	35.00	Peak	183	232 VERTICAL
3	5182.03	119.80			114.56	6.15	34.09	35.00	Peak	183	232 VERTICAL
4	5182.89	108.74			103.50	6.15	34.09	35.00	Average	183	232 VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5148.77	64.92	74.00	-9.08	59.75	6.13	34.04	35.00	Peak	202	44 VERTICAL
2	5150.00	52.68	54.00	-1.32	47.51	6.13	34.04	35.00	Average	202	44 VERTICAL
3	5193.92	122.58			117.30	6.16	34.12	35.00	Peak	202	44 VERTICAL
4	5194.79	111.70			106.42	6.16	34.12	35.00	Average	202	44 VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5140.58	59.32	74.00	-14.68	54.15	6.13	34.04	35.00	Peak	204	315 VERTICAL
2	5142.75	47.77	54.00	-6.23	42.60	6.13	34.04	35.00	Average	204	315 VERTICAL
3	5237.83	112.52			107.17	6.18	34.17	35.00	Average	204	315 VERTICAL
4	5237.83	122.19			116.84	6.18	34.17	35.00	Peak	204	315 VERTICAL
5	5359.12	47.30	54.00	-6.70	41.68	6.26	34.36	35.00	Average	204	315 VERTICAL
6	5377.35	61.02	74.00	-12.98	55.35	6.27	34.39	34.99	Peak	204	315 VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 149, 157, 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 23, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	5712.00	66.76	68.20	-1.44	60.71	6.44	34.64	35.03	Peak	196	135 VERTICAL
2	5724.16	73.74	78.20	-4.46	67.68	6.45	34.64	35.03	Peak	196	135 VERTICAL
3	5749.92	120.87			114.81	6.45	34.65	35.04	Peak	196	135 VERTICAL
4	5750.21	109.95			103.89	6.45	34.65	35.04	Average	196	135 VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	5715.00	66.87	68.20	-1.33	60.82	6.44	34.64	35.03	Peak	207	136 VERTICAL
2	5725.00	71.00	78.20	-7.20	64.94	6.45	34.64	35.03	Peak	207	136 VERTICAL
3	5790.21	113.84			107.76	6.47	34.66	35.05	Average	207	136 VERTICAL
4	5790.21	124.24			118.16	6.47	34.66	35.05	Peak	207	136 VERTICAL
5	5850.00	71.52	78.20	-6.68	65.42	6.49	34.67	35.06	Peak	207	136 VERTICAL
6	5867.24	65.51	68.20	-2.69	59.41	6.50	34.67	35.07	Peak	207	136 VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	5830.21	109.65			103.56	6.48	34.67	35.06	Average	199	135 VERTICAL
2	5830.79	120.44			114.35	6.48	34.67	35.06	Peak	199	135 VERTICAL
3	5851.05	76.86	78.20	-1.34	70.76	6.49	34.67	35.06	Peak	199	135 VERTICAL
4	5870.44	62.65	68.20	-5.55	56.55	6.50	34.67	35.07	Peak	199	135 VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 23, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.90	65.93	74.00	-8.07	60.76	6.13	34.04	35.00	Peak	225	88 VERTICAL
2	5150.00	52.18	54.00	-1.82	47.01	6.13	34.04	35.00	Average	225	88 VERTICAL
3	5184.05	120.25			115.01	6.15	34.09	35.00	Peak	225	88 VERTICAL
4	5185.21	108.51			103.27	6.15	34.09	35.00	Average	225	88 VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5145.88	52.80	54.00	-1.20	47.63	6.13	34.04	35.00	Average	236	87 VERTICAL
2	5146.74	66.39	74.00	-7.61	61.22	6.13	34.04	35.00	Peak	236	87 VERTICAL
3	5205.21	111.73			106.45	6.16	34.12	35.00	Average	236	87 VERTICAL
4	5205.50	123.08			117.80	6.16	34.12	35.00	Peak	236	87 VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.26	47.15	54.00	-6.85	41.98	6.13	34.04	35.00	Average	210	30 VERTICAL
2	5150.00	59.42	74.00	-14.58	54.25	6.13	34.04	35.00	Peak	210	30 VERTICAL
3	5231.75	110.63			105.28	6.18	34.17	35.00	Average	210	30 VERTICAL
4	5232.62	119.60			114.25	6.18	34.17	35.00	Peak	210	30 VERTICAL
5	5351.74	60.22	74.00	-13.78	54.60	6.26	34.36	35.00	Peak	210	30 VERTICAL
6	5352.60	47.34	54.00	-6.66	41.72	6.26	34.36	35.00	Average	210	30 VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 23, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Channel 149

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5710.41	66.60	74.00	-7.40	60.55	6.44	34.64	35.03	Peak	200	135	VERTICAL
2	5710.70	51.77	54.00	-2.23	45.72	6.44	34.64	35.03	Average	200	135	VERTICAL
3	5723.15	73.64	78.20	-4.56	67.58	6.45	34.64	35.03	Peak	200	135	VERTICAL
4	5750.21	108.90			102.84	6.45	34.65	35.04	Average	200	135	VERTICAL
5	5750.21	120.60			114.54	6.45	34.65	35.04	Peak	200	135	VERTICAL

Item 4, 5 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5711.92	67.15	68.20	-1.05	61.10	6.44	34.64	35.03	Peak	202	279	VERTICAL
2	5722.05	72.68	78.20	-5.52	66.62	6.45	34.64	35.03	Peak	202	279	VERTICAL
3	5790.79	112.33			106.25	6.47	34.66	35.05	Average	202	279	VERTICAL
4	5792.24	123.88			117.80	6.47	34.66	35.05	Peak	202	279	VERTICAL
5	5850.85	72.54	78.20	-5.66	66.44	6.49	34.67	35.06	Peak	202	279	VERTICAL
6	5860.00	65.78	68.20	-2.42	59.68	6.50	34.67	35.07	Peak	202	279	VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5830.64	109.39			103.30	6.48	34.67	35.06	Average	208	135	VERTICAL
2	5831.10	119.24			113.15	6.48	34.67	35.06	Peak	208	135	VERTICAL
3	5850.00	76.96	78.20	-1.24	70.86	6.49	34.67	35.06	Peak	208	135	VERTICAL
4	5873.48	63.73	68.20	-4.47	57.62	6.50	34.68	35.07	Peak	208	135	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 23, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5148.90	64.05	74.00	-9.95	58.88	6.13	34.04	35.00	Peak	203	44	VERTICAL
2	5150.00	52.13	54.00	-1.87	46.96	6.13	34.04	35.00	Average	203	44	VERTICAL
3	5184.21	103.50			98.26	6.15	34.09	35.00	Average	203	44	VERTICAL
4	5184.79	113.01			107.77	6.15	34.09	35.00	Peak	203	44	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5148.96	52.22	54.00	-1.78	47.05	6.13	34.04	35.00	Average	205	315	VERTICAL
2	5148.96	63.97	74.00	-10.03	58.80	6.13	34.04	35.00	Peak	205	315	VERTICAL
3	5227.83	108.47			103.12	6.18	34.17	35.00	Average	205	315	VERTICAL
4	5229.28	118.19			112.84	6.18	34.17	35.00	Peak	205	315	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 23, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Channel 151

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	5711.58	66.43	68.20	-1.77	60.38	6.44	34.64	35.03	Peak	202	135 VERTICAL
2	5719.11	69.55	78.20	-8.65	63.49	6.45	34.64	35.03	Peak	202	135 VERTICAL
3	5760.50	114.43			108.37	6.46	34.65	35.05	Peak	202	135 VERTICAL
4	5760.79	104.72			98.66	6.46	34.65	35.05	Average	202	135 VERTICAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	5700.79	65.64	68.20	-2.56	59.59	6.44	34.64	35.03	Peak	201	278 VERTICAL
2	5721.63	69.61	78.20	-8.59	63.55	6.45	34.64	35.03	Peak	201	278 VERTICAL
3	5801.51	107.04			100.96	6.47	34.66	35.05	Average	201	278 VERTICAL
4	5802.38	116.44			110.36	6.47	34.66	35.05	Peak	201	278 VERTICAL
5	5859.69	68.87	78.20	-9.33	62.77	6.50	34.67	35.07	Peak	201	278 VERTICAL
6	5860.00	67.01	68.20	-1.19	60.91	6.50	34.67	35.07	Peak	201	278 VERTICAL

Item 3, 4 are the fundamental frequency at 5795 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 155 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 23, 2015 ~ Oct. 24, 2015		
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Channel 42

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	dB	cm	deg	
1	5147.77	64.85	74.00	-9.15	59.68	6.13	34.04	35.00	199	42	VERTICAL
2	5150.00	52.34	54.00	-1.66	47.17	6.13	34.04	35.00	199	42	VERTICAL
3	5185.40	106.51			101.27	6.15	34.09	35.00	199	42	VERTICAL
4	5204.79	97.02			91.74	6.16	34.12	35.00	199	42	VERTICAL
5	5350.72	47.00	54.00	-7.00	41.38	6.26	34.36	35.00	199	42	VERTICAL
6	5384.73	59.70	74.00	-14.30	54.00	6.28	34.41	34.99	199	42	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Channel 155

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	dB	cm	deg	
1	5704.09	66.54	68.20	-1.66	60.49	6.44	34.64	35.03	207	278	VERTICAL
2	5722.18	67.10	78.20	-11.10	61.04	6.45	34.64	35.03	207	278	VERTICAL
3	5780.79	97.13			91.06	6.46	34.66	35.05	207	278	VERTICAL
4	5782.24	107.25			101.18	6.46	34.66	35.05	207	278	VERTICAL
5	5859.28	62.08	78.20	-16.12	55.98	6.50	34.67	35.07	207	278	VERTICAL
6	5861.83	64.47	68.20	-3.73	58.37	6.50	34.67	35.07	207	278	VERTICAL

Item 3, 4 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5145.37	47.57	54.00	-6.43	42.40	6.13	34.04	35.00	Average	297	301	HORIZONTAL
2	5148.70	59.29	74.00	-14.71	54.12	6.13	34.04	35.00	Peak	297	301	HORIZONTAL
3	5183.33	107.69			102.45	6.15	34.09	35.00	Average	297	301	HORIZONTAL
4	5184.63	117.91			112.67	6.15	34.09	35.00	Peak	297	301	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5144.50	51.21	54.00	-2.79	46.04	6.13	34.04	35.00	Average	300	304	HORIZONTAL
2	5144.79	66.72	74.00	-7.28	61.55	6.13	34.04	35.00	Peak	300	304	HORIZONTAL
3	5203.18	111.40			106.12	6.16	34.12	35.00	Average	300	304	HORIZONTAL
4	5204.05	121.87			116.59	6.16	34.12	35.00	Peak	300	304	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5146.09	58.18	74.00	-15.82	53.01	6.13	34.04	35.00	Peak	279	314	VERTICAL
2	5146.96	46.00	54.00	-8.00	40.83	6.13	34.04	35.00	Average	279	314	VERTICAL
3	5242.60	107.83			102.43	6.20	34.20	35.00	Average	279	314	VERTICAL
4	5243.04	118.36			112.96	6.20	34.20	35.00	Peak	279	314	VERTICAL
5	5351.30	58.10	74.00	-15.90	52.48	6.26	34.36	35.00	Peak	279	314	VERTICAL
6	5356.95	46.37	54.00	-7.63	40.75	6.26	34.36	35.00	Average	279	314	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 149, 157, 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Channel 149

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5712.11	51.29	54.00	-2.71	45.24	6.44	34.64	35.03 Average	263	61	HORIZONTAL
2	5712.25	65.17	74.00	-8.83	59.12	6.44	34.64	35.03 Peak	263	61	HORIZONTAL
3	5723.12	68.15	78.20	-10.05	62.09	6.45	34.64	35.03 Peak	263	61	HORIZONTAL
4	5750.64	116.91			110.85	6.45	34.65	35.04 Peak	263	61	HORIZONTAL
5	5750.79	105.74			99.68	6.45	34.65	35.04 Average	263	61	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5709.36	62.52	74.00	-11.48	56.47	6.44	34.64	35.03 Peak	245	305	HORIZONTAL
2	5713.26	49.29	54.00	-4.71	43.24	6.44	34.64	35.03 Average	245	305	HORIZONTAL
3	5721.96	69.02	78.20	-9.18	62.96	6.45	34.64	35.03 Peak	245	305	HORIZONTAL
4	5788.47	111.74			105.66	6.47	34.66	35.05 Average	245	305	HORIZONTAL
5	5788.47	122.12			116.04	6.47	34.66	35.05 Peak	245	305	HORIZONTAL
6	5854.34	63.38	78.20	-14.82	57.27	6.50	34.67	35.06 Peak	245	305	HORIZONTAL
7	5866.08	61.06	74.00	-12.94	54.96	6.50	34.67	35.07 Peak	245	305	HORIZONTAL
8	5887.79	47.72	54.00	-6.28	41.60	6.51	34.68	35.07 Average	245	305	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5827.60	119.09			113.00	6.48	34.67	35.06 Peak	232	309	HORIZONTAL
2	5827.89	108.59			102.50	6.48	34.67	35.06 Average	232	309	HORIZONTAL
3	5851.45	74.53	78.20	-3.67	68.43	6.49	34.67	35.06 Peak	232	309	HORIZONTAL
4	5860.87	51.12	54.00	-2.88	45.02	6.50	34.67	35.07 Average	232	309	HORIZONTAL
5	5861.74	66.60	74.00	-7.40	60.50	6.50	34.67	35.07 Peak	232	309	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	5145.66	60.04	74.00	-13.96	54.87	6.13	34.04	35.00	Peak	284	57 HORIZONTAL
2	5150.00	46.20	54.00	-7.80	41.03	6.13	34.04	35.00	Average	284	57 HORIZONTAL
3	5178.26	106.48			101.24	6.15	34.09	35.00	Average	284	57 HORIZONTAL
4	5178.55	117.67			112.43	6.15	34.09	35.00	Peak	284	57 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	5138.42	62.92	74.00	-11.08	57.79	6.12	34.01	35.00	Peak	296	58 HORIZONTAL
2	5150.00	50.30	54.00	-3.70	45.13	6.13	34.04	35.00	Average	296	58 HORIZONTAL
3	5198.26	121.34			116.06	6.16	34.12	35.00	Peak	296	58 HORIZONTAL
4	5198.55	110.34			105.06	6.16	34.12	35.00	Average	296	58 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	5114.83	59.48	74.00	-14.52	54.39	6.11	33.99	35.01	Peak	291	60 HORIZONTAL
2	5146.53	46.19	54.00	-7.81	41.02	6.13	34.04	35.00	Average	291	60 HORIZONTAL
3	5238.70	121.64			116.29	6.18	34.17	35.00	Peak	291	60 HORIZONTAL
4	5239.13	109.85			104.50	6.18	34.17	35.00	Average	291	60 HORIZONTAL
5	5350.43	46.01	54.00	-7.99	40.39	6.26	34.36	35.00	Average	291	60 HORIZONTAL
6	5352.60	59.30	74.00	-14.70	53.68	6.26	34.36	35.00	Peak	291	60 HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	5707.62	62.97	74.00	-11.03	56.92	6.44	34.64	35.03	249	306	HORIZONTAL
2	5709.21	48.67	54.00	-5.33	42.62	6.44	34.64	35.03	249	306	HORIZONTAL
3	5724.71	67.50	78.20	-10.70	61.44	6.45	34.64	35.03	249	306	HORIZONTAL
4	5747.46	105.69			99.63	6.45	34.65	35.04	249	306	HORIZONTAL
5	5747.75	117.64			111.58	6.45	34.65	35.04	249	306	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	5713.26	62.56	74.00	-11.44	56.51	6.44	34.64	35.03	248	303	HORIZONTAL
2	5715.00	48.88	54.00	-5.12	42.83	6.44	34.64	35.03	248	303	HORIZONTAL
3	5724.13	68.26	78.20	-9.94	62.20	6.45	34.64	35.03	248	303	HORIZONTAL
4	5788.04	110.81			104.73	6.47	34.66	35.05	248	303	HORIZONTAL
5	5788.91	121.77			115.69	6.47	34.66	35.05	248	303	HORIZONTAL
6	5850.87	63.20	78.20	-15.00	57.10	6.49	34.67	35.06	248	303	HORIZONTAL
7	5861.74	60.00	74.00	-14.00	53.90	6.50	34.67	35.07	248	303	HORIZONTAL
8	5886.92	47.29	54.00	-6.71	41.18	6.50	34.68	35.07	248	303	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	5828.18	107.81			101.72	6.48	34.67	35.06	256	300	HORIZONTAL
2	5828.76	119.30			113.21	6.48	34.67	35.06	256	300	HORIZONTAL
3	5850.00	75.97	78.20	-2.23	69.87	6.49	34.67	35.06	256	300	HORIZONTAL
4	5861.74	49.10	54.00	-4.90	43.00	6.50	34.67	35.07	256	300	HORIZONTAL
5	5863.18	64.16	74.00	-9.84	58.06	6.50	34.67	35.07	256	300	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	49.73	54.00	-4.27	44.56	6.13	34.04	35.00 Average	286	62	HORIZONTAL
2	5150.00	62.31	74.00	-11.69	57.14	6.13	34.04	35.00 Peak	286	62	HORIZONTAL
3	5187.97	100.66			95.42	6.15	34.09	35.00 Average	286	62	HORIZONTAL
4	5188.55	111.07			105.83	6.15	34.09	35.00 Peak	286	62	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5148.70	49.41	54.00	-4.59	44.24	6.13	34.04	35.00 Average	288	55	HORIZONTAL
2	5149.13	62.30	74.00	-11.70	57.13	6.13	34.04	35.00 Peak	288	55	HORIZONTAL
3	5228.84	104.20			98.85	6.18	34.17	35.00 Average	288	55	HORIZONTAL
4	5228.84	115.15			109.80	6.18	34.17	35.00 Peak	288	55	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Channel 151

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	5699.08	64.06	74.00	-9.94	58.02	6.43	34.64	35.03	Peak	242	305 HORIZONTAL
2	5715.00	51.34	54.00	-2.66	45.29	6.44	34.64	35.03	Average	242	305 HORIZONTAL
3	5725.00	69.69	78.20	-8.51	63.63	6.45	34.64	35.03	Peak	242	305 HORIZONTAL
4	5757.89	100.75			94.69	6.46	34.65	35.05	Average	242	305 HORIZONTAL
5	5757.89	111.27			105.21	6.46	34.65	35.05	Peak	242	305 HORIZONTAL

Item 4, 5 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	5715.00	50.38	54.00	-3.62	44.33	6.44	34.64	35.03	Average	243	304 HORIZONTAL
2	5715.00	61.96	74.00	-12.04	55.91	6.44	34.64	35.03	Peak	243	304 HORIZONTAL
3	5717.19	65.44	78.20	-12.76	59.39	6.44	34.64	35.03	Peak	243	304 HORIZONTAL
4	5798.47	103.89			97.81	6.47	34.66	35.05	Average	243	304 HORIZONTAL
5	5799.34	115.09			109.01	6.47	34.66	35.05	Peak	243	304 HORIZONTAL
6	5858.25	65.56	78.20	-12.64	59.46	6.50	34.67	35.07	Peak	243	304 HORIZONTAL
7	5860.00	50.83	54.00	-3.17	44.73	6.50	34.67	35.07	Average	243	304 HORIZONTAL
8	5860.00	64.48	74.00	-9.52	58.38	6.50	34.67	35.07	Peak	243	304 HORIZONTAL

Item 4, 5 are the fundamental frequency at 5795 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 155 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015 ~ Oct. 17, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Channel 42

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	5147.83	50.14	54.00	-3.86	44.97	6.13	34.04	35.00	298	60	HORIZONTAL
2	5147.83	61.74	74.00	-12.26	56.57	6.13	34.04	35.00	298	60	HORIZONTAL
3	5188.29	94.01			88.77	6.15	34.09	35.00	298	60	HORIZONTAL
4	5189.02	103.96			98.72	6.15	34.09	35.00	298	60	HORIZONTAL
5	5351.45	46.80	54.00	-7.20	41.18	6.26	34.36	35.00	298	60	HORIZONTAL
6	5352.89	58.32	74.00	-15.68	52.70	6.26	34.36	35.00	298	60	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Channel 155

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	5698.94	51.11	54.00	-2.89	45.07	6.43	34.64	35.03	265	300	HORIZONTAL
2	5711.96	65.50	74.00	-8.50	59.45	6.44	34.64	35.03	265	300	HORIZONTAL
3	5718.92	66.35	78.20	-11.85	60.29	6.45	34.64	35.03	265	300	HORIZONTAL
4	5778.91	93.41			87.34	6.46	34.66	35.05	265	300	HORIZONTAL
5	5799.31	103.56			97.48	6.47	34.66	35.05	265	300	HORIZONTAL
6	5858.70	63.80	78.20	-14.40	57.70	6.50	34.67	35.07	265	300	HORIZONTAL
7	5860.00	51.04	54.00	-2.96	44.94	6.50	34.67	35.07	265	300	HORIZONTAL
8	5860.87	63.43	74.00	-10.57	57.33	6.50	34.67	35.07	265	300	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.8.4. Test Setup Layout

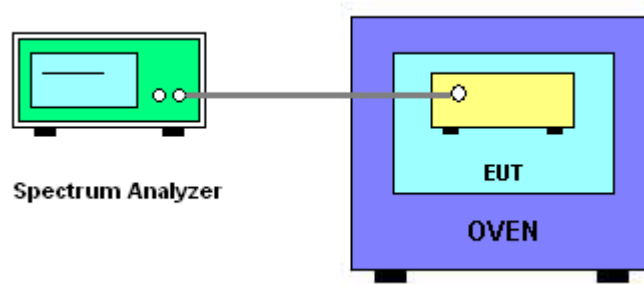

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	25°C	Humidity	55%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Oct. 23, 2015 ~ Nov. 10, 2015
Test Mode	Mode 1: EUT 1 + Set 2 Dipole Antenna / 4.67 dBi		

Mode: 20 MHz / Chain 3

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5200.0068	5200.0054	5200.0036	5200.0015
110.00	5200.0056	5200.0043	5200.0027	5200.0008
93.50	5200.0042	5200.0031	5200.0019	5199.9997
Max. Deviation (MHz)	0.0068	0.0054	0.0036	0.0015
Max. Deviation (ppm)	1.31	1.04	0.69	0.29
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5200.0110	5200.0097	5200.0080	5200.0056
-10	5200.0095	5200.0083	5200.0067	5200.0048
0	5200.0081	5200.0069	5200.0050	5200.0028
10	5200.0068	5200.0055	5200.0040	5200.0022
20	5200.0056	5200.0043	5200.0027	5200.0008
30	5200.0042	5200.0031	5200.0017	5200.0001
40	5200.0026	5200.0011	5199.9995	5199.9975
50	5200.0009	5199.9997	5199.9982	5199.9955
Max. Deviation (MHz)	0.0110	0.0097	0.0080	0.0056
Max. Deviation (ppm)	2.12	1.87	1.54	1.08
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5785.0025	5785.0011	5784.9993	5784.9972
110.00	5785.0013	5785.0000	5784.9984	5784.9965
93.50	5784.9999	5784.9988	5784.9976	5784.9954
Max. Deviation (MHz)	0.0025	0.0012	0.0024	0.0046
Max. Deviation (ppm)	0.43	0.21	0.41	0.80
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5785.0067	5785.0054	5785.0037	5785.0013
-10	5785.0052	5785.0040	5785.0024	5785.0005
0	5785.0038	5785.0026	5785.0007	5784.9985
10	5785.0025	5785.0012	5784.9997	5784.9979
20	5785.0013	5785.0000	5784.9984	5784.9965
30	5784.9999	5784.9988	5784.9974	5784.9958
40	5784.9983	5784.9968	5784.9952	5784.9932
50	5784.9966	5784.9954	5784.9939	5784.9912
Max. Deviation (MHz)	0.0067	0.0054	0.0061	0.0088
Max. Deviation (ppm)	1.16	0.93	1.05	1.52
Result	Complies			

Mode: 40 MHz / Chain 3

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5190.0029	5190.0015	5189.9997	5189.9976
110.00	5190.0017	5190.0004	5189.9988	5189.9969
93.50	5190.0003	5189.9992	5189.9980	5189.9958
Max. Deviation (MHz)	0.0029	0.0015	0.0020	0.0042
Max. Deviation (ppm)	0.56	0.29	0.39	0.81
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5190.0071	5190.0058	5190.0041	5190.0017
-10	5190.0056	5190.0044	5190.0028	5190.0009
0	5190.0042	5190.0030	5190.0011	5189.9989
10	5190.0029	5190.0016	5190.0001	5189.9983
20	5190.0017	5190.0004	5189.9988	5189.9969
30	5190.0003	5189.9992	5189.9978	5189.9962
40	5189.9987	5189.9972	5189.9956	5189.9936
50	5189.9970	5189.9958	5189.9943	5189.9916
Max. Deviation (MHz)	0.0071	0.0058	0.0057	0.0084
Max. Deviation (ppm)	1.37	1.12	1.10	1.62
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5755.0099	5755.0085	5755.0067	5755.0046
110.00	5755.0087	5755.0074	5755.0058	5755.0039
93.50	5755.0073	5755.0062	5755.0050	5755.0028
Max. Deviation (MHz)	0.0099	0.0085	0.0067	0.0046
Max. Deviation (ppm)	1.72	1.48	1.16	0.80
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5755.0141	5755.0128	5755.0111	5755.0087
-10	5755.0126	5755.0114	5755.0098	5755.0079
0	5755.0112	5755.0100	5755.0081	5755.0059
10	5755.0099	5755.0086	5755.0071	5755.0053
20	5755.0087	5755.0074	5755.0058	5755.0039
30	5755.0073	5755.0062	5755.0048	5755.0032
40	5755.0057	5755.0042	5755.0026	5755.0006
50	5755.0040	5755.0028	5755.0013	5754.9986
Max. Deviation (MHz)	0.0141	0.0128	0.0111	0.0087
Max. Deviation (ppm)	2.45	2.22	1.93	1.51
Result	Complies			

Mode: 80 MHz / Chain 3

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5210.0042	5210.0028	5210.0010	5209.9989
110.00	5210.0030	5210.0017	5210.0001	5209.9982
93.50	5210.0016	5210.0005	5209.9993	5209.9971
Max. Deviation (MHz)	0.0042	0.0028	0.0010	0.0029
Max. Deviation (ppm)	0.81	0.54	0.19	0.56
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5210.0084	5210.0071	5210.0054	5210.0030
-10	5210.0069	5210.0057	5210.0041	5210.0022
0	5210.0055	5210.0043	5210.0024	5210.0002
10	5210.0042	5210.0029	5210.0014	5209.9996
20	5210.0030	5210.0017	5210.0001	5209.9982
30	5210.0016	5210.0005	5209.9991	5209.9975
40	5210.0000	5209.9985	5209.9969	5209.9949
50	5209.9983	5209.9971	5209.9956	5209.9929
Max. Deviation (MHz)	0.0084	0.0071	0.0054	0.0071
Max. Deviation (ppm)	1.61	1.36	1.04	1.36
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5775.0029	5775.0015	5774.9997	5774.9976
110.00	5775.0017	5775.0004	5774.9988	5774.9969
93.50	5775.0003	5774.9992	5774.9980	5774.9958
Max. Deviation (MHz)	0.0029	0.0015	0.0020	0.0042
Max. Deviation (ppm)	0.50	0.26	0.35	0.73
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5775.0071	5775.0058	5775.0041	5775.0017
-10	5775.0056	5775.0044	5775.0028	5775.0009
0	5775.0042	5775.0030	5775.0011	5774.9989
10	5775.0029	5775.0016	5775.0001	5774.9983
20	5775.0017	5775.0004	5774.9988	5774.9969
30	5775.0003	5774.9992	5774.9978	5774.9962
40	5774.9987	5774.9972	5774.9956	5774.9936
50	5774.9970	5774.9958	5774.9943	5774.9916
Max. Deviation (MHz)	0.0071	0.0058	0.0057	0.0084
Max. Deviation (ppm)	1.23	1.00	0.99	1.45
Result	Complies			

Temperature	25°C	Humidity	55%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Oct. 20, 2015
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Mode: 20 MHz / Chain 4

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5200.0559	5200.0545	5200.0527	5200.0506
110.00	5200.0547	5200.0534	5200.0518	5200.0499
93.50	5200.0533	5200.0522	5200.0510	5200.0488
Max. Deviation (MHz)	0.0559	0.0545	0.0527	0.0506
Max. Deviation (ppm)	10.75	10.48	10.13	9.73
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5200.0601	5200.0588	5200.0571	5200.0547
-10	5200.0586	5200.0574	5200.0558	5200.0539
0	5200.0572	5200.0560	5200.0541	5200.0519
10	5200.0559	5200.0546	5200.0531	5200.0513
20	5200.0547	5200.0534	5200.0518	5200.0499
30	5200.0533	5200.0522	5200.0508	5200.0492
40	5200.0517	5200.0502	5200.0486	5200.0466
50	5200.0500	5200.0488	5200.0473	5200.0446
Max. Deviation (MHz)	0.0601	0.0588	0.0571	0.0547
Max. Deviation (ppm)	11.56	11.31	10.98	10.52
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5785.0586	5785.0572	5785.0554	5785.0533
110.00	5785.0574	5785.0561	5785.0545	5785.0526
93.50	5785.0560	5785.0549	5785.0537	5785.0515
Max. Deviation (MHz)	0.0586	0.0572	0.0554	0.0533
Max. Deviation (ppm)	10.13	9.89	9.58	9.21
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5785.0628	5785.0615	5785.0598	5785.0574
-10	5785.0613	5785.0601	5785.0585	5785.0566
0	5785.0599	5785.0587	5785.0568	5785.0546
10	5785.0586	5785.0573	5785.0558	5785.0540
20	5785.0574	5785.0561	5785.0545	5785.0526
30	5785.0560	5785.0549	5785.0535	5785.0519
40	5785.0544	5785.0529	5785.0513	5785.0493
50	5785.0527	5785.0515	5785.0500	5785.0473
Max. Deviation (MHz)	0.0628	0.0615	0.0598	0.0574
Max. Deviation (ppm)	10.86	10.63	10.34	9.92
Result	Complies			

Mode: 40 MHz / Chain 4

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5190.0510	5190.0496	5190.0478	5190.0457
110.00	5190.0498	5190.0485	5190.0469	5190.0450
93.50	5190.0484	5190.0473	5190.0461	5190.0439
Max. Deviation (MHz)	0.0510	0.0496	0.0478	0.0457
Max. Deviation (ppm)	9.83	9.56	9.21	8.81
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5190.0552	5190.0539	5190.0522	5190.0498
-10	5190.0537	5190.0525	5190.0509	5190.0490
0	5190.0523	5190.0511	5190.0492	5190.0470
10	5190.0510	5190.0497	5190.0482	5190.0464
20	5190.0498	5190.0485	5190.0469	5190.0450
30	5190.0484	5190.0473	5190.0459	5190.0443
40	5190.0468	5190.0453	5190.0437	5190.0417
50	5190.0451	5190.0439	5190.0424	5190.0397
Max. Deviation (MHz)	0.0552	0.0539	0.0522	0.0498
Max. Deviation (ppm)	10.64	10.39	10.06	9.60
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5755.0635	5755.0621	5755.0603	5755.0582
110.00	5755.0623	5755.0610	5755.0594	5755.0575
93.50	5755.0609	5755.0598	5755.0586	5755.0564
Max. Deviation (MHz)	0.0635	0.0621	0.0603	0.0582
Max. Deviation (ppm)	11.03	10.79	10.48	10.11
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5755.0677	5755.0664	5755.0647	5755.0623
-10	5755.0662	5755.0650	5755.0634	5755.0615
0	5755.0648	5755.0636	5755.0617	5755.0595
10	5755.0635	5755.0622	5755.0607	5755.0589
20	5755.0623	5755.0610	5755.0594	5755.0575
30	5755.0609	5755.0598	5755.0584	5755.0568
40	5755.0593	5755.0578	5755.0562	5755.0542
50	5755.0576	5755.0564	5755.0549	5755.0522
Max. Deviation (MHz)	0.0677	0.0664	0.0647	0.0623
Max. Deviation (ppm)	11.76	11.54	11.24	10.83
Result	Complies			

Mode: 80 MHz / Chain 4

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5210.0603	5210.0589	5210.0571	5210.0550
110.00	5210.0591	5210.0578	5210.0562	5210.0543
93.50	5210.0577	5210.0566	5210.0554	5210.0532
Max. Deviation (MHz)	0.0603	0.0589	0.0571	0.0550
Max. Deviation (ppm)	11.57	11.31	10.96	10.56
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5210.0645	5210.0632	5210.0615	5210.0591
-10	5210.0630	5210.0618	5210.0602	5210.0583
0	5210.0616	5210.0604	5210.0585	5210.0563
10	5210.0603	5210.0590	5210.0575	5210.0557
20	5210.0591	5210.0578	5210.0562	5210.0543
30	5210.0577	5210.0566	5210.0552	5210.0536
40	5210.0561	5210.0546	5210.0530	5210.0510
50	5210.0544	5210.0532	5210.0517	5210.0490
Max. Deviation (MHz)	0.0645	0.0632	0.0615	0.0591
Max. Deviation (ppm)	12.38	12.13	11.80	11.34
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5775.0427	5775.0413	5775.0395	5775.0374
110.00	5775.0415	5775.0402	5775.0386	5775.0367
93.50	5775.0401	5775.0390	5775.0378	5775.0356
Max. Deviation (MHz)	0.0427	0.0413	0.0395	0.0374
Max. Deviation (ppm)	7.39	7.15	6.84	6.48
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5775.0469	5775.0456	5775.0439	5775.0415
-10	5775.0454	5775.0442	5775.0426	5775.0407
0	5775.0440	5775.0428	5775.0409	5775.0387
10	5775.0427	5775.0414	5775.0399	5775.0381
20	5775.0415	5775.0402	5775.0386	5775.0367
30	5775.0401	5775.0390	5775.0376	5775.0360
40	5775.0385	5775.0370	5775.0354	5775.0334
50	5775.0368	5775.0356	5775.0341	5775.0314
Max. Deviation (MHz)	0.0469	0.0456	0.0439	0.0415
Max. Deviation (ppm)	8.12	7.90	7.60	7.19
Result	Complies			

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10259	9kHz ~ 1.3GHz	Jan. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%