



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Senao Networks Inc.
Applicant Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan
FCC ID	U2M-IAP8250AG
Manufacturer's company	Senao Networks Inc.
Manufacturer Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan

Product Name	Indoor Wireless Access Point
Brand Name	SENAO
Model No.	IAP8250AG & IAP8251AG & EWS370AP & EWS371AP
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Oct. 15, 2015
Final Test Date	Mar. 02, 2016
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11b/g, IEEE 802.11n and IEEE 802.11ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r04 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	10
3.7. Table for Multiple Listing.....	10
3.8. Table for Supporting Units	11
3.9. Table for Parameters of Test Software Setting	12
3.10. EUT Operation during Test	12
3.11. Duty Cycle	12
3.12. Test Configurations	13
4. TEST RESULT	16
4.1. AC Power Line Conducted Emissions Measurement.....	16
4.2. Maximum Conducted Output Power Measurement.....	20
4.3. Power Spectral Density Measurement	23
4.4. 6dB Spectrum Bandwidth Measurement	43
4.5. Radiated Emissions Measurement	55
4.6. Emissions Measurement	86
4.7. Antenna Requirements	120
5. LIST OF MEASURING EQUIPMENTS	121
6. MEASUREMENT UNCERTAINTY.....	123
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR541527AA	Rev. 01	Initial issue of report	May 24, 2016
FR541527AA	Rev. 02	Adding two model names: EWS370AP, EWS371AP	Jun. 07, 2016

1. VERIFICATION OF COMPLIANCE

Product Name : Indoor Wireless Access Point
Brand Name : SENAO
Model No. : IAP8250AG & IAP8251AG & EWS370AP & EWS371AP
Applicant : Senao Networks Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 15, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

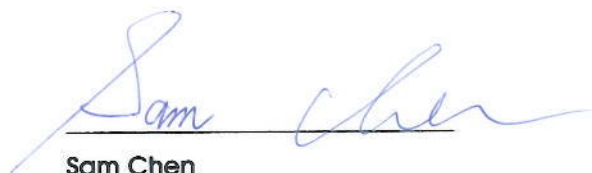

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	14.86 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	1.66 dB
4.3	15.247(e)	Power Spectral Density	Complies	1.50 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	1.34 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.10 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter or PoE
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi IEEE 802.11b: 14.50 MHz IEEE 802.11g: 19.80 MHz IEEE 802.11n MCS0 (HT20): 21.88 MHz IEEE 802.11n MCS0 (HT40): 36.76 MHz Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi IEEE 802.11b: 14.50 MHz IEEE 802.11g: 20.14 MHz IEEE 802.11n MCS0 (HT20): 19.80 MHz IEEE 802.11n MCS0 (HT40): 36.61 MHz

Maximum Conducted Output Power	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi IEEE 802.11b: 27.31 dBm IEEE 802.11g: 28.08 dBm IEEE 802.11n MCS0 (HT20): 27.02 dBm IEEE 802.11n MCS0 (HT40): 20.21 dBm Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi IEEE 802.11b: 26.03 dBm IEEE 802.11g: 28.34 dBm IEEE 802.11n MCS0 (HT20): 28.11 dBm IEEE 802.11n MCS0 (HT40): 21.82 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna and Band width

Antenna	Four (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V
IEEE 802.11ac	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40. Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20 and VHT40 in 2.4GHz. Note 3: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n, VHT20/VHT40: IEEE 802.11ac		

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Set	Brand Holder	Model Number (Part No.)	Extreme Part No. (Short Description)	Antenna Type	Connector	Polarized Antenna	Gain (dBi)	
							2.4GHz	5GHz
1	Master Wave Technology Co., Ltd.	98152MRSX015	30709 (WS-ANT-2DIP-4)	Dipole Antenna	RP SMA Male	X	4.66	-
2	Master Wave Technology Co., Ltd.	98152URSX009	30710 (WS-ANT-5DIP-4)	Dipole Antenna	RP SMA Male	X	-	4.67
3	Senao Networks, Inc.	AP3935i	-	PIFA Antenna	IPEX	X	Note 1	

Note1:

Set	Antenna Gain (dBi)							
	2.4GHz				5GHz			
	Chain 1	Chain 2	Chain 3	Chain 4	Chain 1	Chain 2	Chain 3	Chain 4
3	3.81	3.75	3.98	3.47	5.84	5.50	5.84	5.65

Note2:

The EUT has three sets of antennas.

<For 2.4GHz Function>

For IEEE 802.11b/g/n/ac mode (4TX, 4RX):


Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

<For 5GHz Function>


For IEEE 802.11a/n/ac mode (4TX, 4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

For EUT 1:

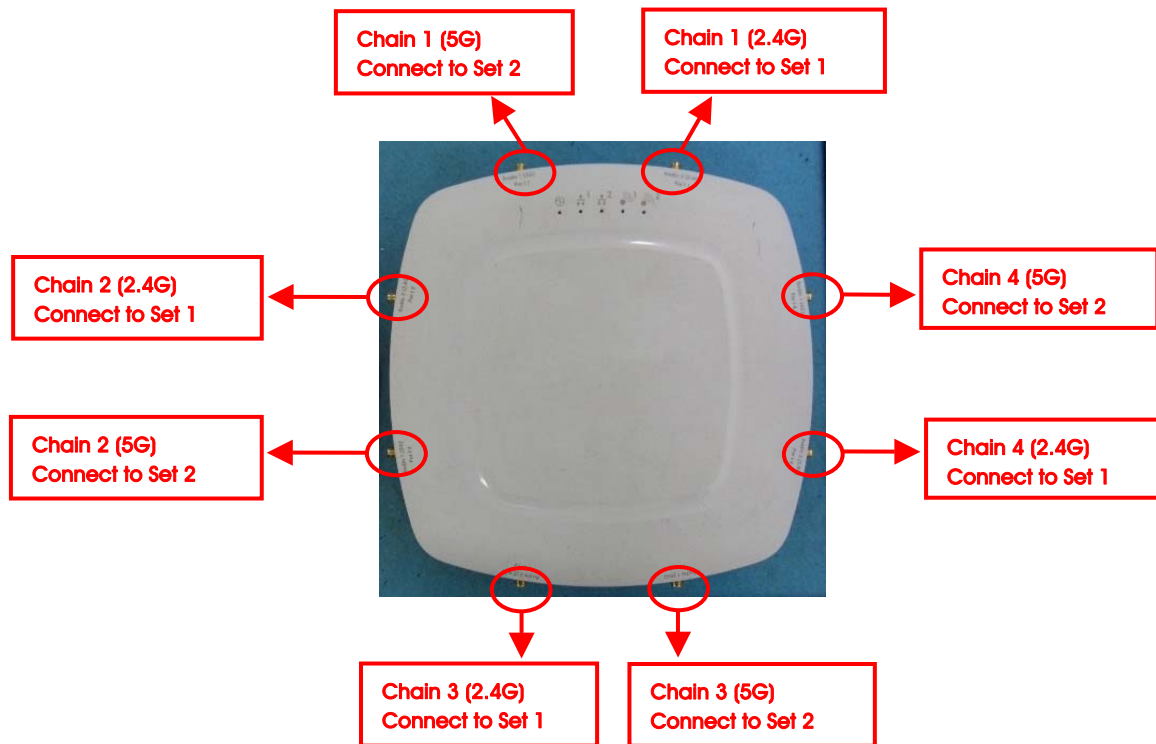

For EUT 2:

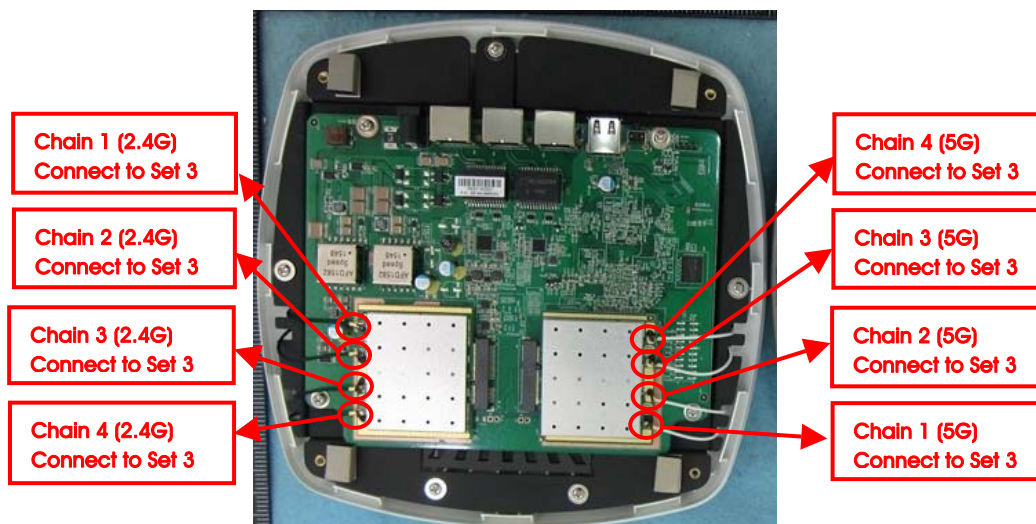

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11n HT20	MCS0	1/6/11	1+2+3+4
	11n HT40	MCS0	3/6/9	1+2+3+4
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11n HT20	MCS0	1/6/11	1+2+3+4
	11n HT40	MCS0	3/6/9	1+2+3+4
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11n HT20	MCS0	1/6/11	1+2+3+4
	11n HT40	MCS0	3/6/9	1+2+3+4
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11n HT20	MCS0	1/6/11	1+2+3+4
	11n HT40	MCS0	3/6/9	1+2+3+4
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11n HT20	MCS0	1/6/11	1+2+3+4
	11n HT40	MCS0	3/6/9	1+2+3+4

Note1: HT20/HT40 covers VHT20/VHT40, due to same modulation. The power setting for 802.11ac VHT20 and VHT40 are the same or lower than 802.11n HT20 and HT40.

Note2:

The adapter and PoE are for measurement only, would not be marketed.

The adapter and PoE information as below:

Power	Brand	Model
Adapter	Powertron Electronics Corp.	PA1024-120HUB200
PoE	Microsemi	PD-9001GR/AC

Note3: All the specification of test configurations and test modes were based on customer's request.

Note4: The console port can not be used by end user. It is generally used for updating FW by professional installer.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link - EUT 1 + Set 1 + Set 2 + Adapter

Mode 2. Normal Link - EUT 2 + Set 3 + Adapter

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission Below 1GHz test:

Mode 1. Place EUT 1 in Y axis + Set 1 + Set 2 + Adapter

Mode 2. Place EUT 1 in Z axis + Set 1 + Set 2 + Adapter

Mode 2 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3~5 will follow this same test mode.

Mode 3. Place EUT 1 in Z axis + Set 1 + Set 2 + PoE

Mode 4. Place EUT 2 in Z axis + Set 3 + Adapter

Mode 5. Place EUT 2 in Z axis + Set 3 + PoE

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission Above 1GHz test:

The EUT 1 was performed at Y axis and Z axis position. Z axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

The EUT 2 was performed at Y axis and Z axis position. Y axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

Mode 1. Place EUT 1 in Z axis + Set 1

Mode 2. Place EUT 2 in Y axis + Set 3

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA541527AA) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple Listing

The model names are identical to each other in all aspects except for the following table:

Equipment	EUT	Model Name	Internal Antenna	External Antenna	Equipped Antenna
Indoor Wireless Access Point	1	IAP8251AG EWS371AP	X	V	Set 1~2
	2	IAP8250AG EWS370AP	V	X	Set 3

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB (For Below 1GHz)

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E4300	DoC
Flash disk	Silicon Power	I-Series	DoC
Adapter	Powertron Electronics Corp.	PA1024-120HUB200	N/A

For Test Site No: 03CH01-CB (For Above 1GHz)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Adapter	Powertron Electronics Corp.	PA1024-120HUB200	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E6430	DoC
Flash disk	Transcend	604108 8255	DoC
Adapter	Powertron Electronics Corp.	PA1024-120HUB200	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Adapter	Powertron Electronics Corp.	PA1024-120HUB200	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	21	21	20.5	-	-	-
802.11g	13.5	23	14.5	-	-	-
802.11n MCS0 HT20	14	22	14	-	-	-
802.11n MCS0 HT40	-	-	-	9.5	14.5	11

Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi

Test Software Version	QCA VER3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	19	20	20	-	-	-
802.11g	16.5	23	16.5	-	-	-
802.11n MCS0 HT20	15.5	23	16.5	-	-	-
802.11n MCS0 HT40	-	-	-	13	16	12

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100	0.00	0.01
802.11g	2.060	2.150	95.81	0.19	0.49
802.11n MCS0 HT20	5.000	5.096	98.12	0.08	0.01
802.11n MCS0 HT40	2.380	2.480	95.97	0.18	0.42

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions Test Configuration

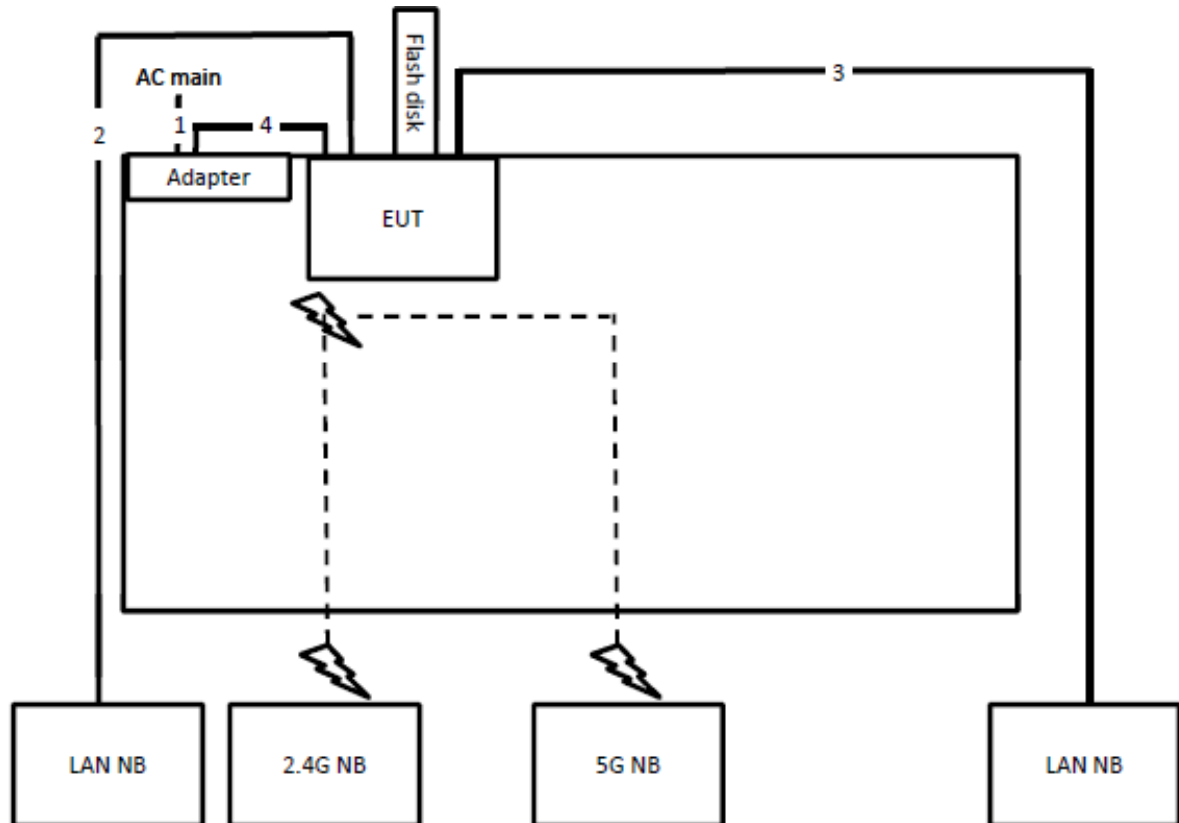

Item	Connection	Shielded	Length(m)
1	AC Power cable	No	1.8
2	RJ-45 cable	No	10
3	RJ-45 cable	No	10
4	DC Power cable	No	1.2


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

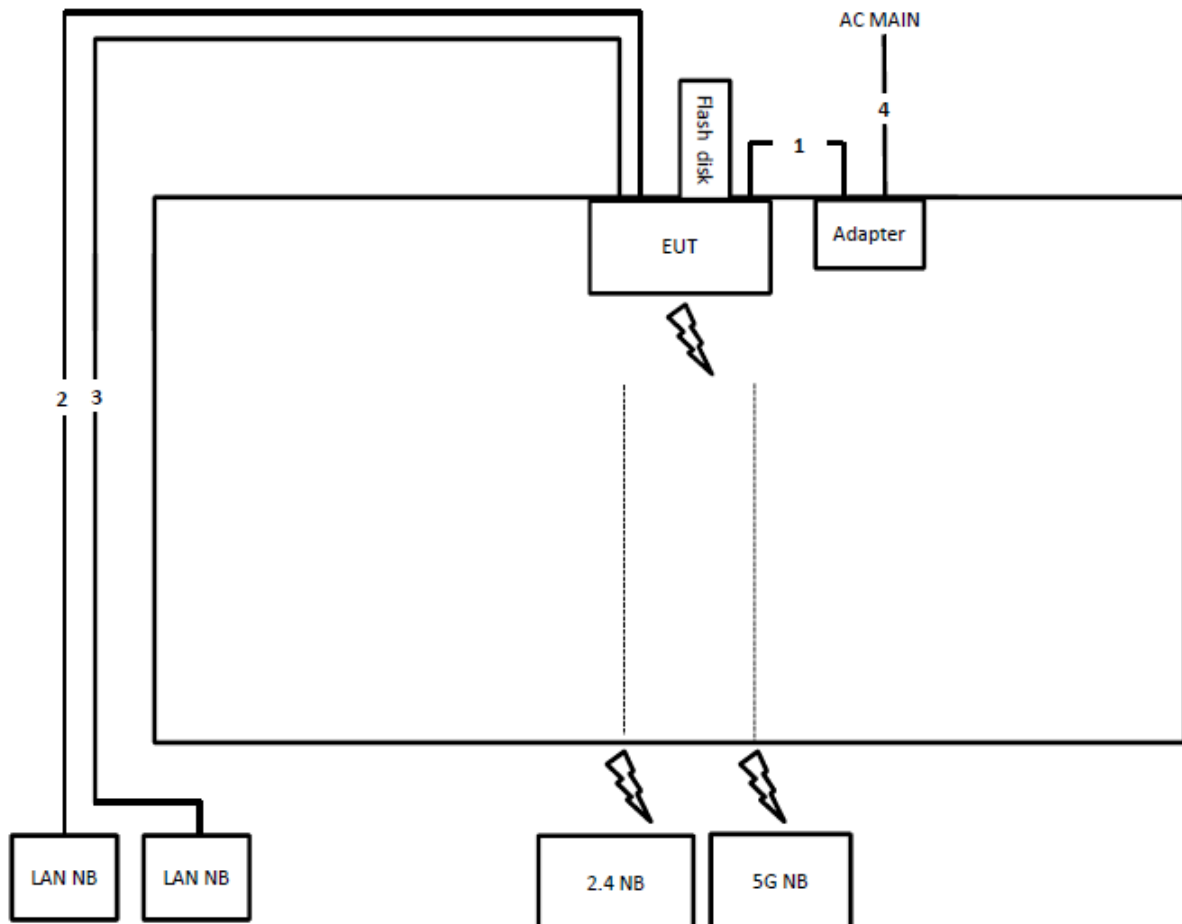

Item	Connection	Shielded	Length(m)
1	DC Power cable	No	1.2
2	RJ-45 cable	No	10
3	RJ-45 cable	No	10
4	AC Power cable	No	1.8

Test Configuration: above 1GHz

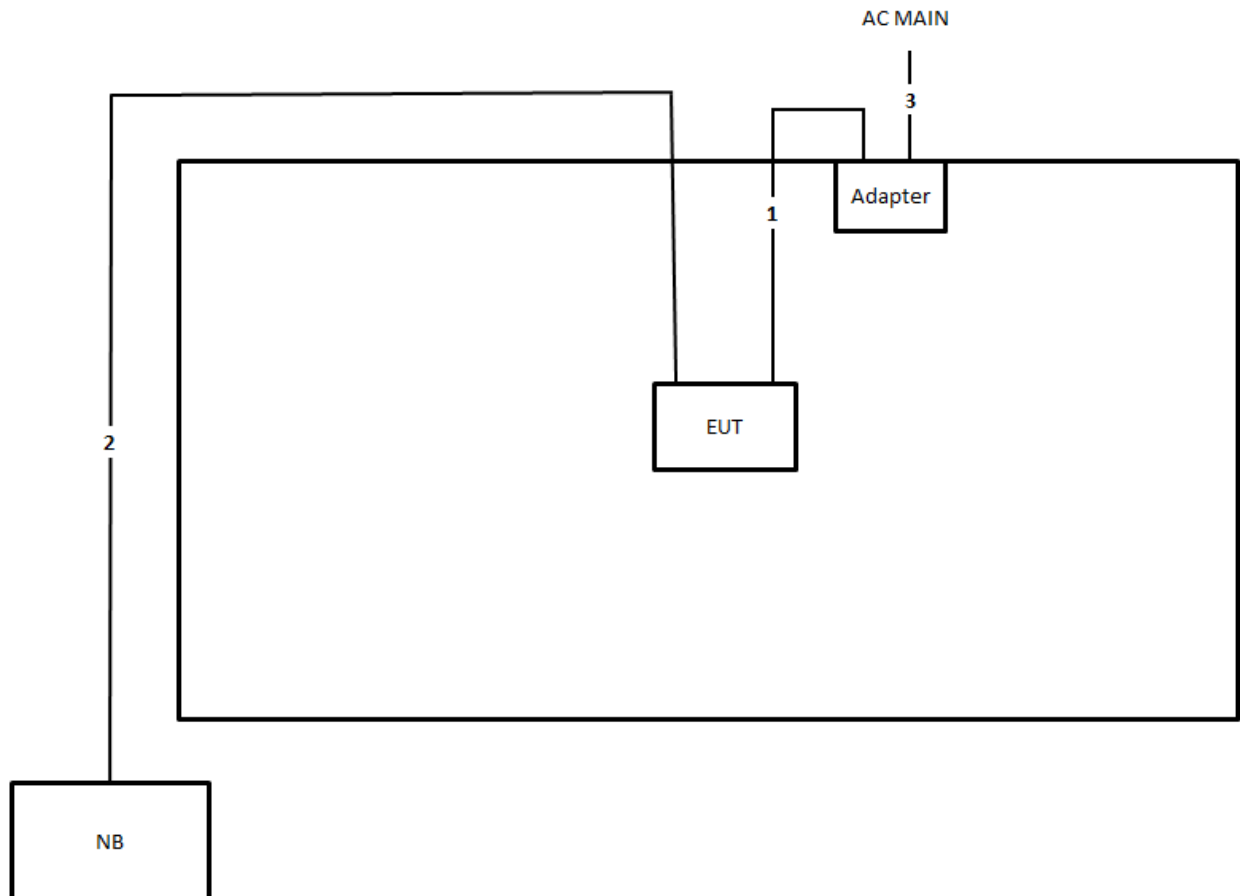

Item	Connection	Shielded	Length(m)
1	DC Power cable	No	1.2
2	RJ-45 cable	No	10
3	AC Power cable	No	1.8

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

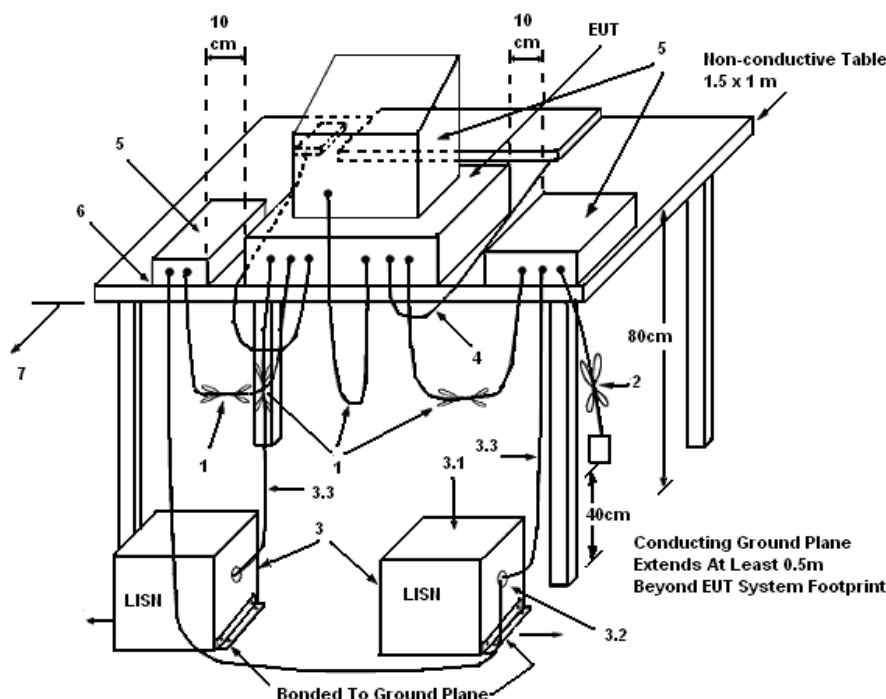

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

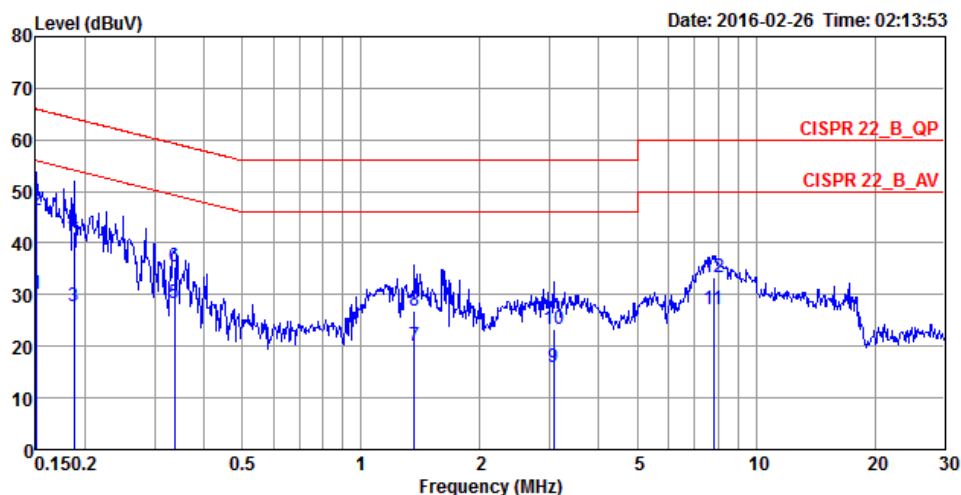

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1508	30.01	-25.95	55.96	20.06	9.93	0.02	LINE	Average
2	0.1508	46.43	-19.53	65.96	36.48	9.93	0.02	LINE	QP
3	0.1874	27.67	-26.48	54.15	17.72	9.93	0.02	LINE	Average
4	0.1874	42.20	-21.95	64.15	32.25	9.93	0.02	LINE	QP
5	0.3374	28.32	-20.95	49.27	18.35	9.93	0.04	LINE	Average
6	0.3374	35.37	-23.90	59.27	25.40	9.93	0.04	LINE	QP
7	1.3665	20.16	-25.84	46.00	10.14	9.97	0.05	LINE	Average
8	1.3665	26.98	-29.02	56.00	16.96	9.97	0.05	LINE	QP
9	3.0738	15.92	-30.08	46.00	5.86	10.01	0.05	LINE	Average
10	3.0738	23.42	-32.58	56.00	13.36	10.01	0.05	LINE	QP
11	7.8102	27.11	-22.89	50.00	16.81	10.14	0.16	LINE	Average
12	7.8102	33.27	-26.73	60.00	22.97	10.14	0.16	LINE	QP

Temperature	23°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

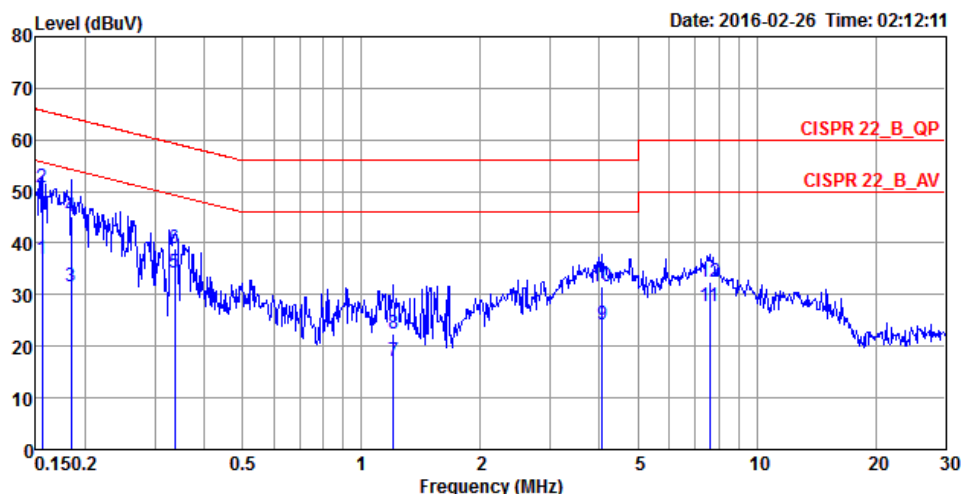

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1557	36.84	-18.85	55.69	27.04	9.78	0.02	NEUTRAL	Average
2	0.1557	50.83	-14.86	65.69	41.03	9.78	0.02	NEUTRAL	QP
3	0.1844	31.72	-22.56	54.28	21.91	9.79	0.02	NEUTRAL	Average
4	0.1844	45.19	-19.09	64.28	35.38	9.79	0.02	NEUTRAL	QP
5	0.3374	34.38	-14.89	49.27	24.55	9.79	0.04	NEUTRAL	Average
6	0.3374	38.92	-20.35	59.27	29.09	9.79	0.04	NEUTRAL	QP
7	1.2034	17.18	-28.82	46.00	7.31	9.82	0.05	NEUTRAL	Average
8	1.2034	22.48	-33.52	56.00	12.61	9.82	0.05	NEUTRAL	QP
9	4.0704	24.22	-21.78	46.00	14.28	9.87	0.07	NEUTRAL	Average
10	4.0704	31.50	-24.50	56.00	21.56	9.87	0.07	NEUTRAL	QP
11	7.6060	27.87	-22.13	50.00	17.75	9.97	0.15	NEUTRAL	Average
12	7.6060	32.58	-27.42	60.00	22.46	9.97	0.15	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r04 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

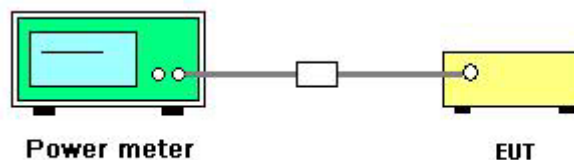

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Nov. 06, 2015
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	20.63	21.86	21.02	20.89	27.15	30.00	Complies
	2437 MHz	21.73	21.57	21.11	20.66	27.31	30.00	Complies
	2462 MHz	20.75	20.98	20.14	20.03	26.51	30.00	Complies
802.11g	2412 MHz	13.28	13.23	12.54	12.76	18.98	30.00	Complies
	2437 MHz	21.65	22.46	21.84	22.25	28.08	30.00	Complies
	2462 MHz	13.64	13.56	13.25	13.64	19.55	30.00	Complies
802.11n MCS0 HT20	2412 MHz	12.64	13.57	12.98	13.24	19.14	30.00	Complies
	2437 MHz	20.45	21.31	20.85	21.33	27.02	30.00	Complies
	2462 MHz	12.73	12.95	12.83	13.27	18.97	30.00	Complies
802.11n MCS0 HT40	2422 MHz	8.74	9.42	9.17	9.53	15.25	30.00	Complies
	2437 MHz	13.82	14.33	13.98	14.58	20.21	30.00	Complies
	2452 MHz	10.05	10.58	10.27	10.78	16.45	30.00	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang	Test Date	Nov. 20, 2015
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	19.24	19.62	18.78	18.61	25.10	30.00	Complies
	2437 MHz	20.03	20.62	19.73	19.58	26.03	30.00	Complies
	2462 MHz	19.84	20.21	19.66	19.63	25.86	30.00	Complies
802.11g	2412 MHz	16.26	15.97	15.85	15.48	21.92	30.00	Complies
	2437 MHz	22.64	22.58	21.85	22.14	28.34	30.00	Complies
	2462 MHz	15.89	16.17	15.43	15.34	21.74	30.00	Complies
802.11n MCS0 HT20	2412 MHz	15.12	14.78	14.38	14.09	20.63	30.00	Complies
	2437 MHz	22.28	22.37	21.72	21.95	28.11	30.00	Complies
	2462 MHz	15.68	15.92	15.47	15.39	21.64	30.00	Complies
802.11n MCS0 HT40	2422 MHz	13.32	13.19	12.38	12.87	18.98	30.00	Complies
	2437 MHz	16.05	15.89	15.54	15.71	21.82	30.00	Complies
	2452 MHz	11.89	12.03	11.66	11.21	17.73	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

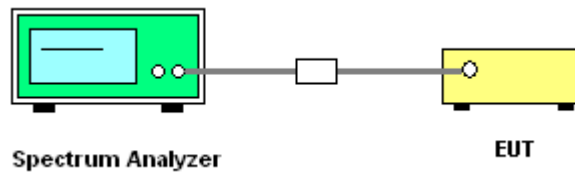

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-3.49	-3.72	-4.99	-4.82	1.82	3.32	Complies
	2437 MHz	-4.78	-6.71	-4.30	-4.96	0.92	3.32	Complies
	2462 MHz	-3.36	-5.50	-4.52	-5.15	1.47	3.32	Complies
802.11g	2412 MHz	-14.28	-14.84	-13.40	-14.14	-8.11	3.32	Complies
	2437 MHz	-5.16	-5.68	-4.14	-5.02	1.06	3.32	Complies
	2462 MHz	-12.52	-13.55	-13.22	-13.27	-7.10	3.32	Complies
802.11n MCS0 HT20	2412 MHz	-13.89	-13.45	-13.32	-12.42	-7.22	3.32	Complies
	2437 MHz	-6.73	-6.28	-6.88	-5.95	-0.42	3.32	Complies
	2462 MHz	-12.24	-15.28	-14.15	-14.66	-7.90	3.32	Complies
802.11n MCS0 HT40	2422 MHz	-20.08	-20.25	-20.06	-19.50	-13.94	3.32	Complies
	2437 MHz	-16.28	-15.35	-14.30	-15.20	-9.21	3.32	Complies
	2452 MHz	-20.05	-19.62	-18.98	-18.98	-13.36	3.32	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.68 \text{dBi} > 6 \text{dBi}$, So Limit = $8 - (10.68 - 6) = 3.32 \text{dBm/3kHz}$.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-11.93	-12.20	-12.55	-12.08	-6.16	4.22	Complies
	2437 MHz	-11.76	-10.39	-11.36	-11.70	-5.25	4.22	Complies
	2462 MHz	-9.59	-10.76	-10.87	-11.56	-4.62	4.22	Complies
802.11g	2412 MHz	-17.15	-16.41	-17.62	-17.09	-11.03	4.22	Complies
	2437 MHz	-10.66	-11.08	-10.48	-11.75	-4.95	4.22	Complies
	2462 MHz	-17.36	-18.00	-17.01	-17.44	-11.42	4.22	Complies
802.11n MCS0 HT20	2412 MHz	-18.05	-18.47	-17.32	-18.07	-11.94	4.22	Complies
	2437 MHz	-10.83	-10.97	-10.44	-11.31	-4.86	4.22	Complies
	2462 MHz	-17.86	-16.92	-17.19	-18.18	-11.49	4.22	Complies
802.11n MCS0 HT40	2422 MHz	-23.20	-23.66	-22.87	-23.76	-17.34	4.22	Complies
	2437 MHz	-20.41	-20.94	-19.34	-20.78	-14.30	4.22	Complies
	2452 MHz	-24.75	-24.93	-24.27	-24.60	-18.61	4.22	Complies


Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.78\text{dBi} > 6\text{dBi}$, So Limit = 8-(9.78-6)=4.22dBm/3kHz.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1

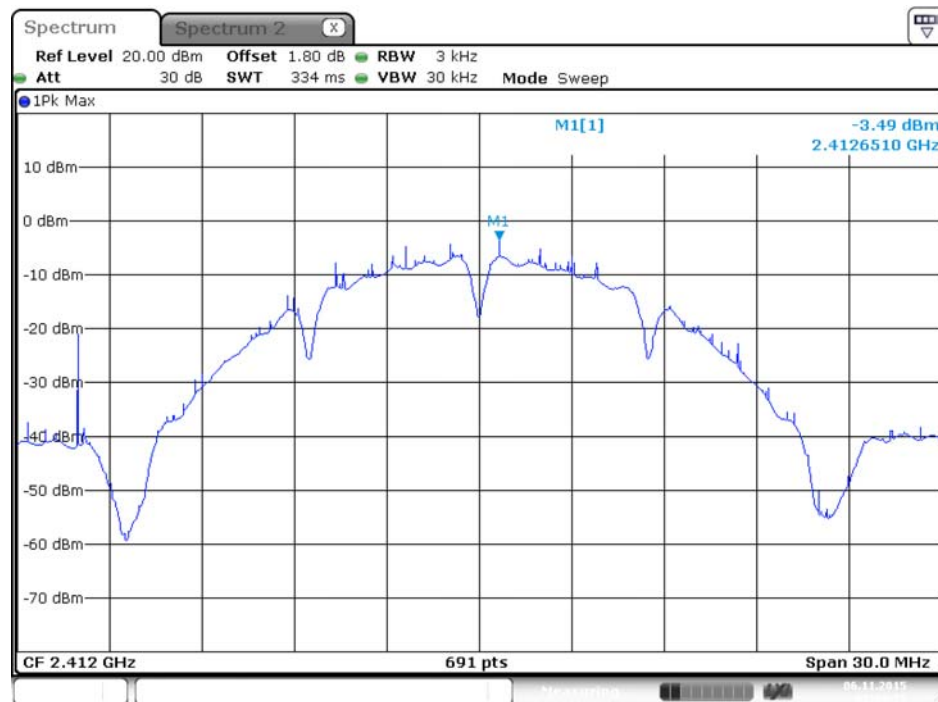

Date: 6.NOV.2015 03:04:52

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 2

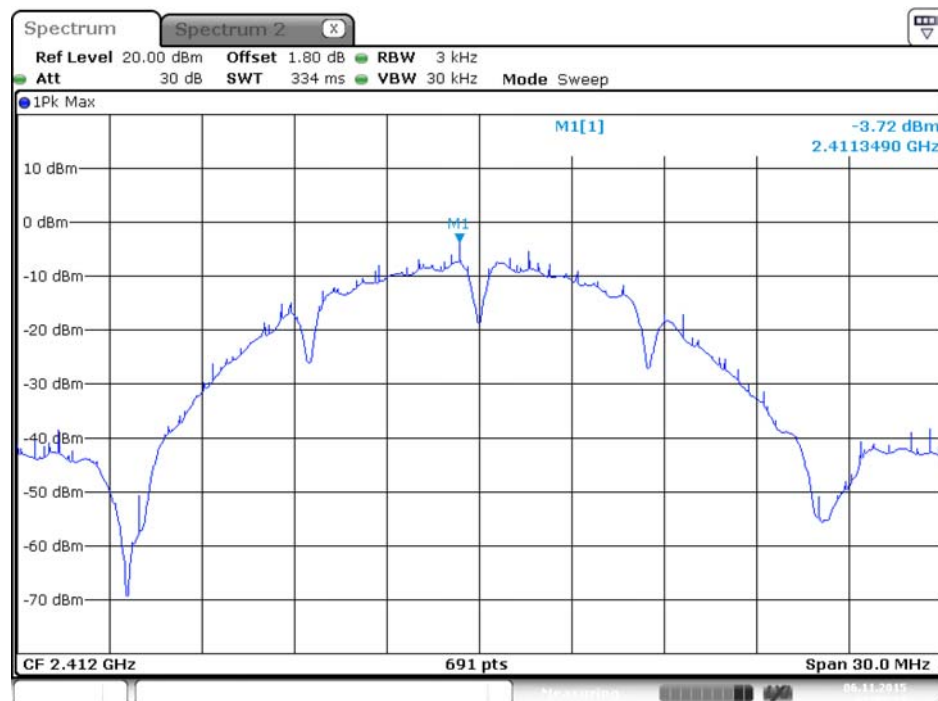


Date: 6.NOV.2015 03:05:18

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 3




Date: 6.NOV.2015 03:05:40

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 4

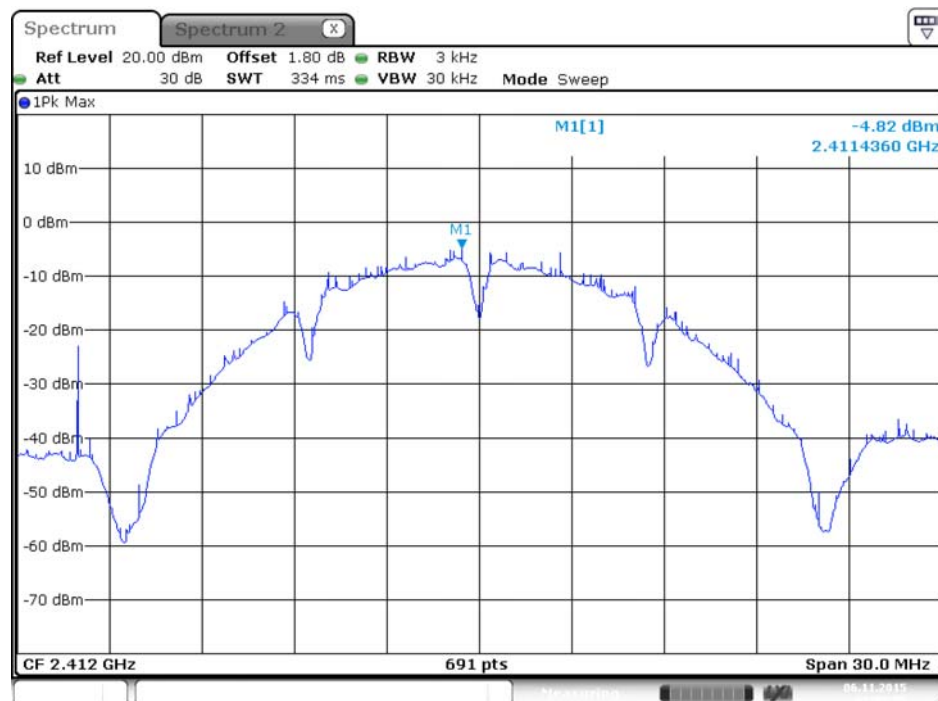


Date: 6.NOV.2015 03:05:55

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

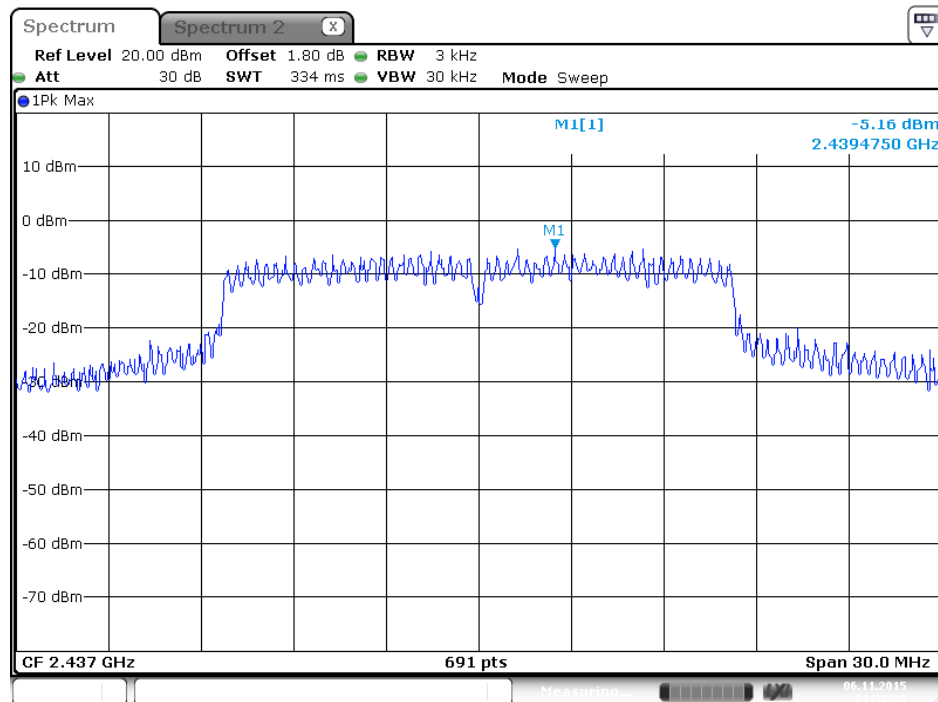


Date: 6 NOV 2015 01:38:30

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

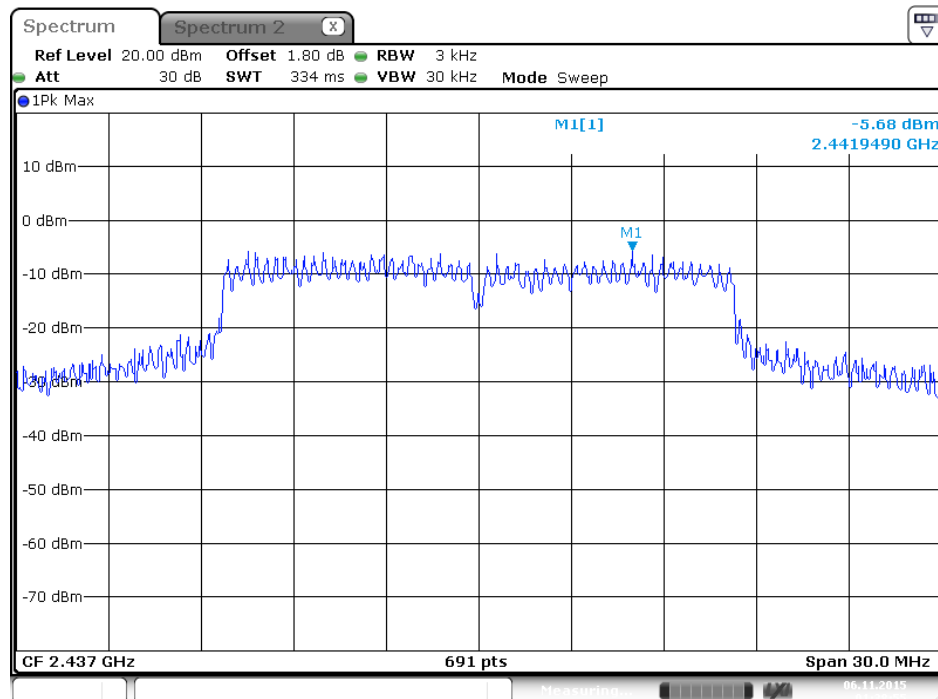


Date: 6 NOV 2015 01:38:55

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

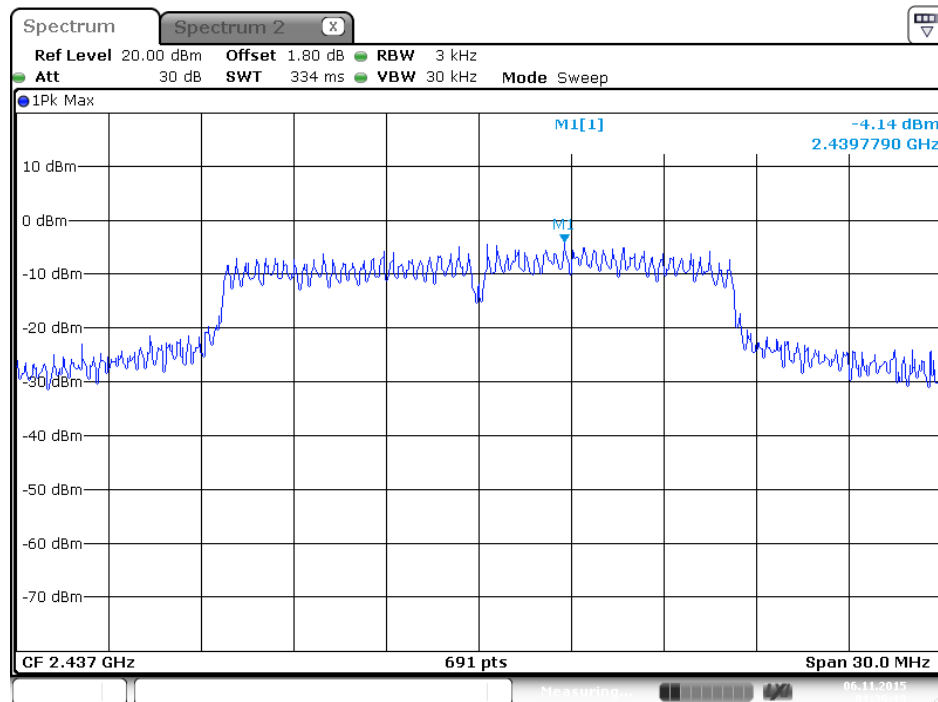


Date: 6 NOV 2015 01:39:13

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

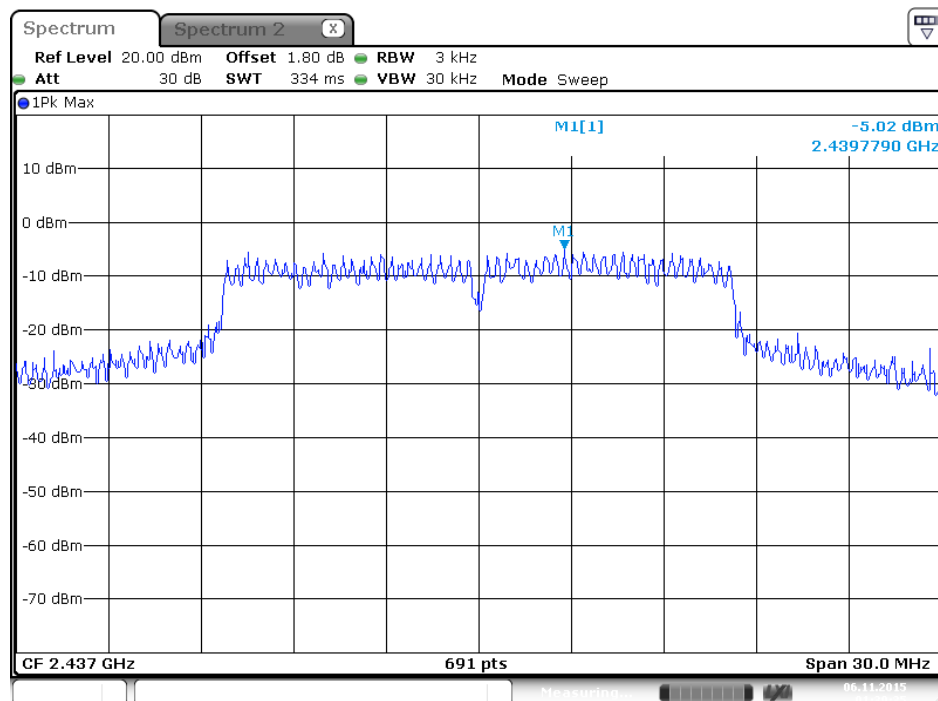


Date: 6 NOV 2015 01:39:36


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

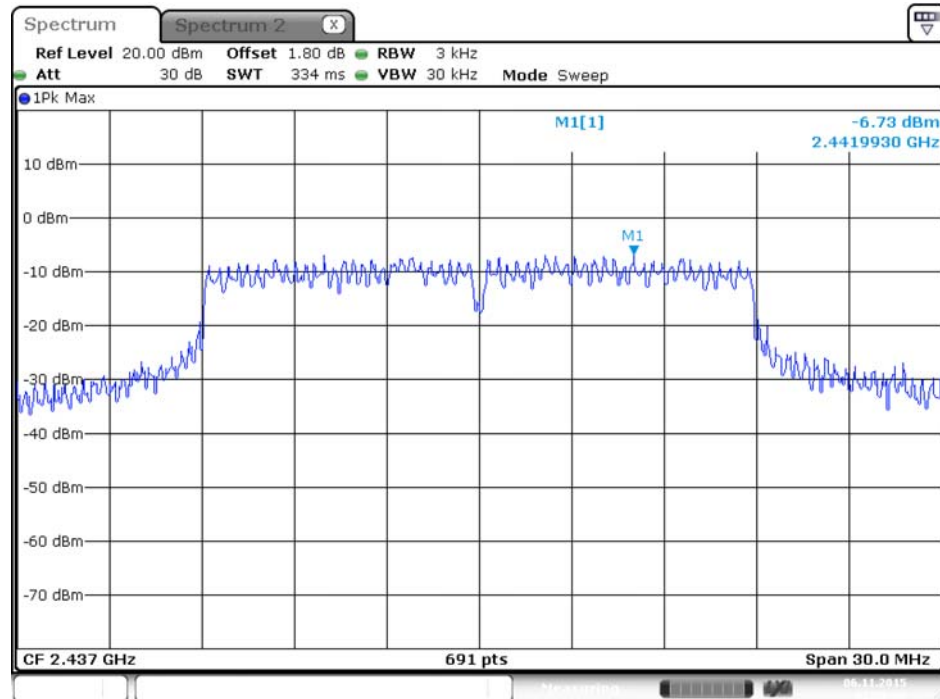

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

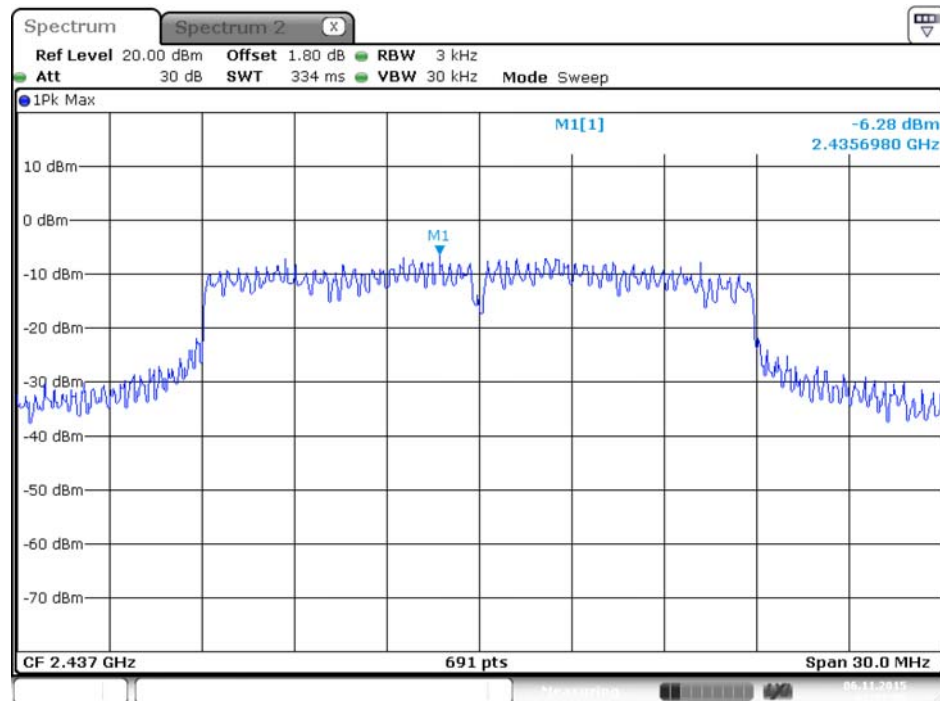


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

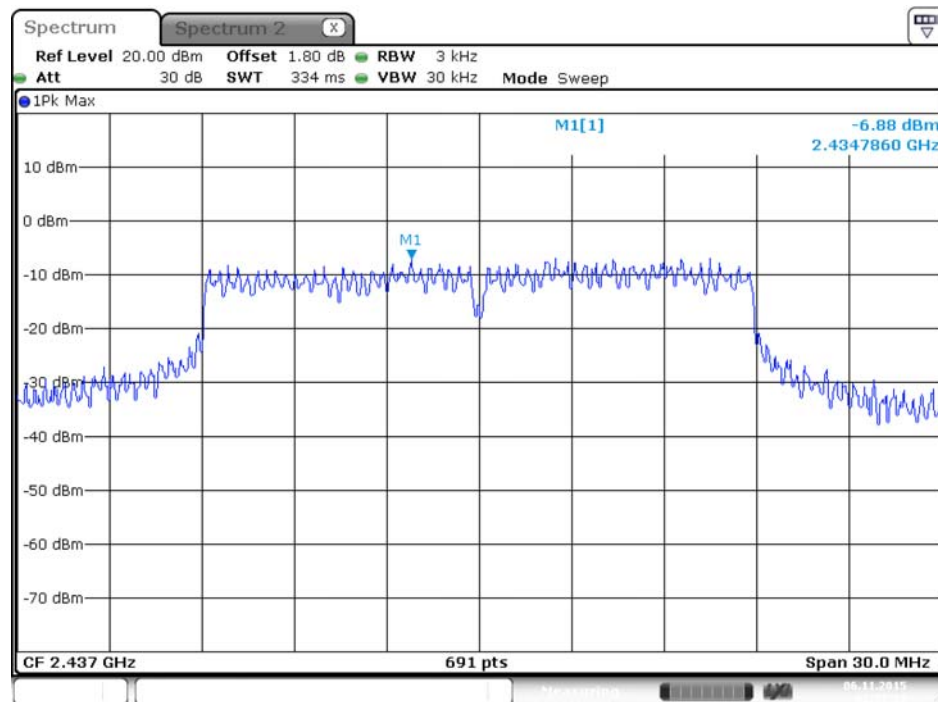


Date: 6.NOV.2015 02:57:19

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 4

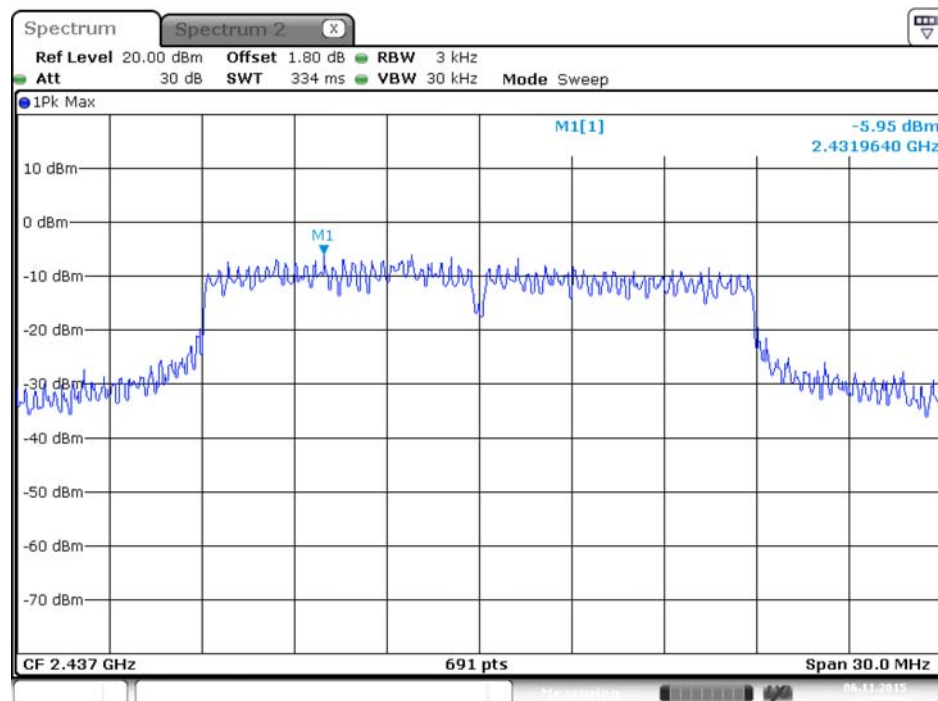


Date: 6.NOV.2015 02:57:35

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

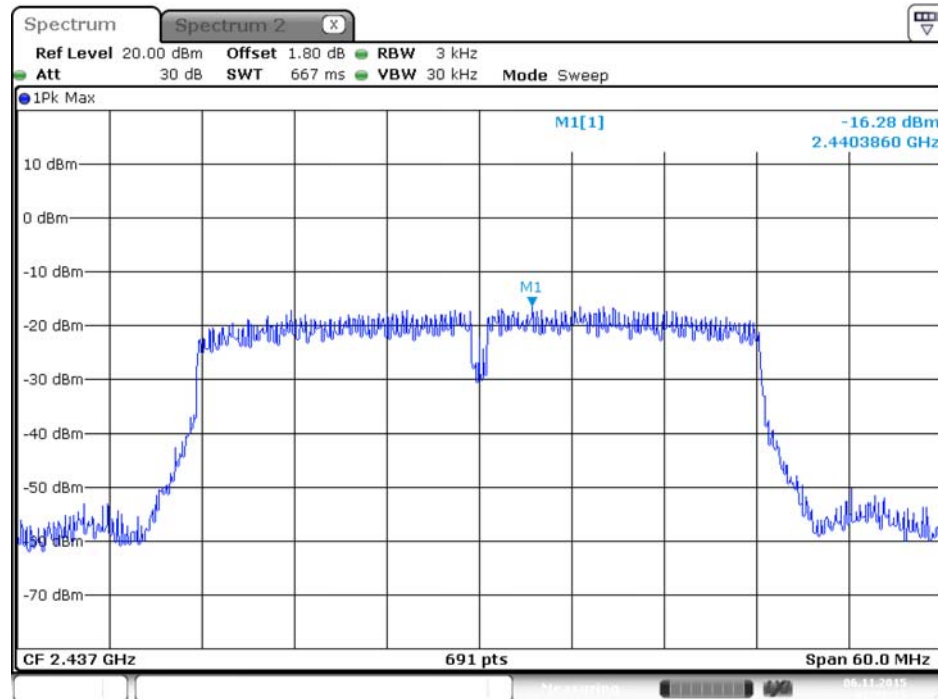


Date: 6.NOV.2015 02:52:21

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

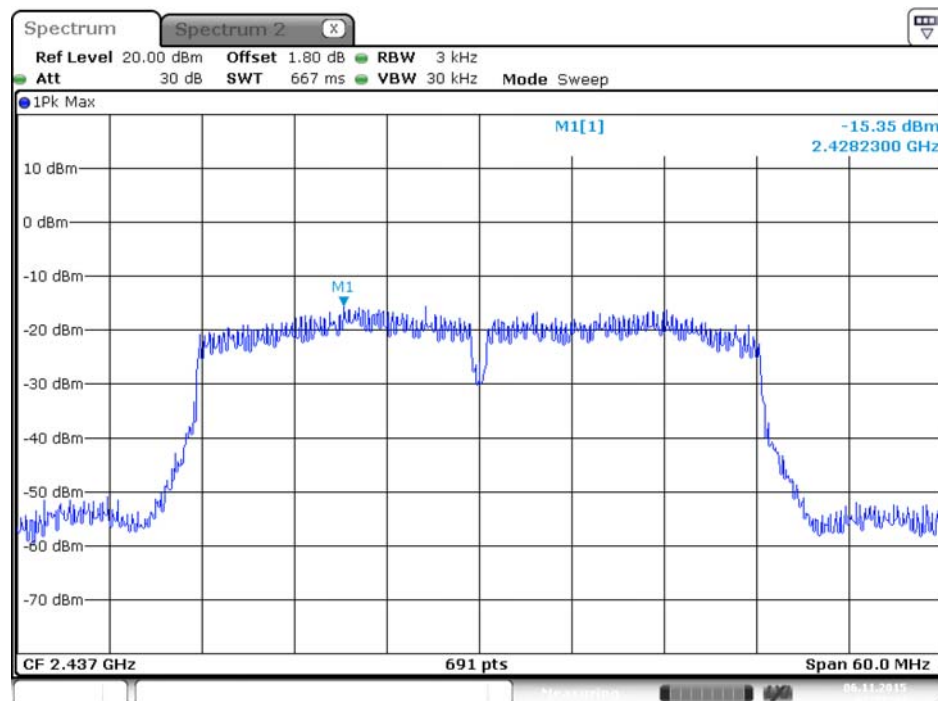


Date: 6.NOV.2015 02:52:43

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

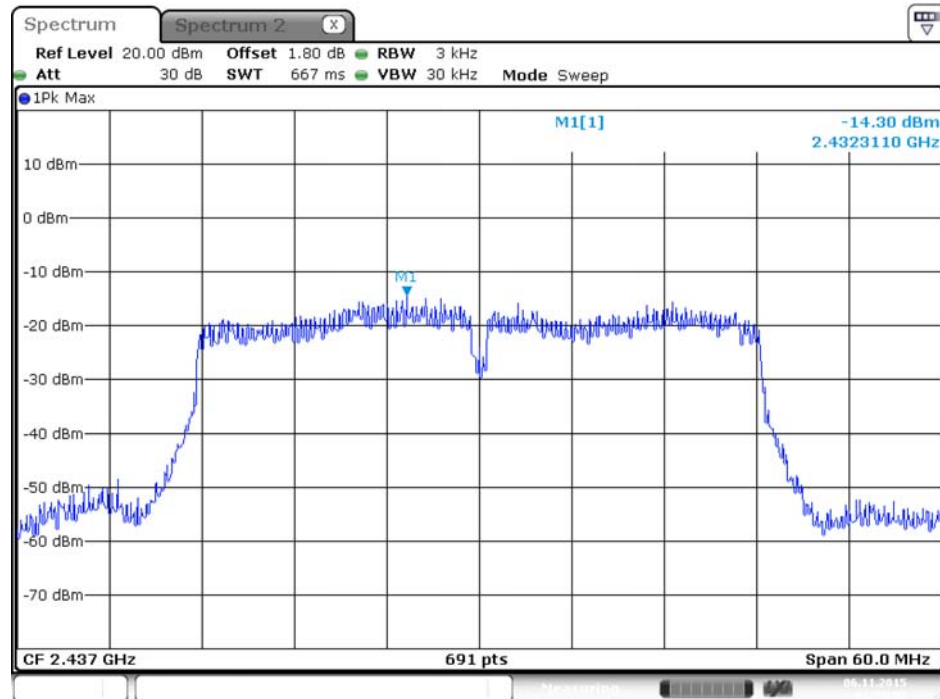

Date: 6.NOV.2015 02:53:02

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 4

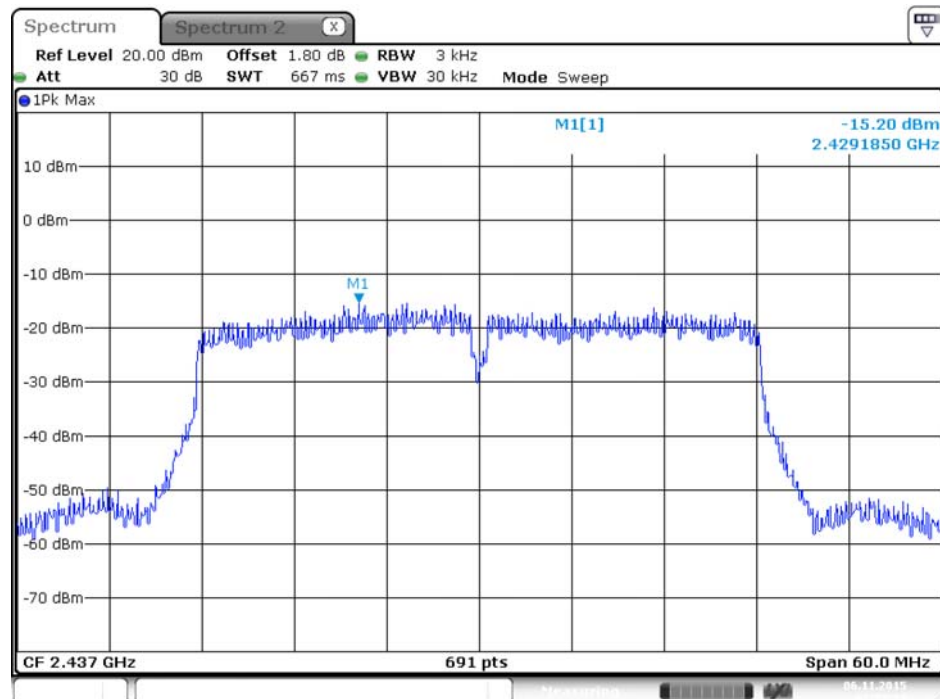

Date: 6.NOV.2015 02:53:18


Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1




Date: 21.OCT.2015 01:24:58

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 2

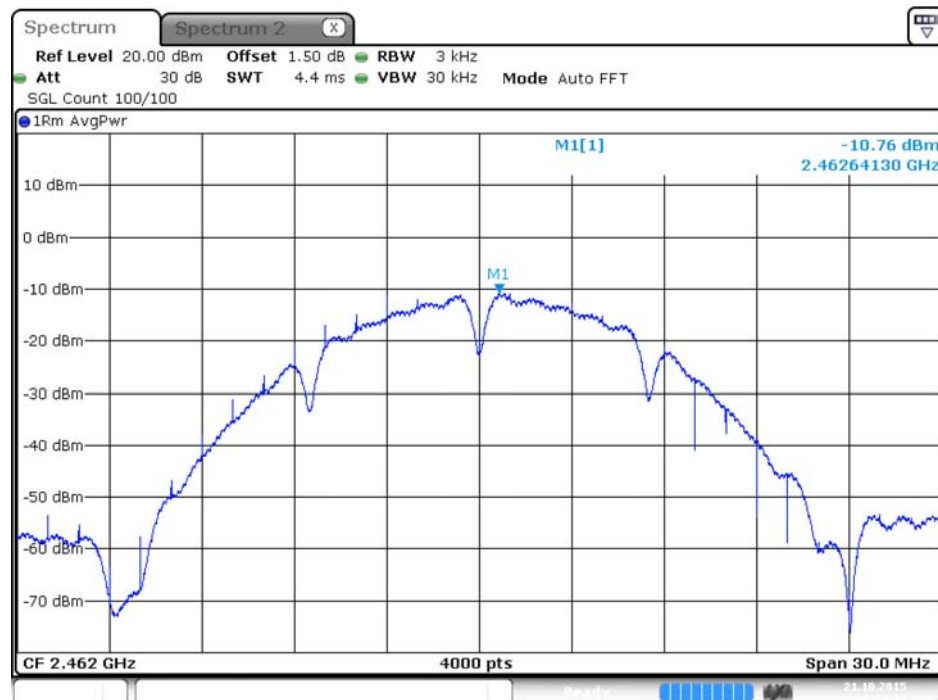


Date: 21.OCT.2015 01:24:41

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 3

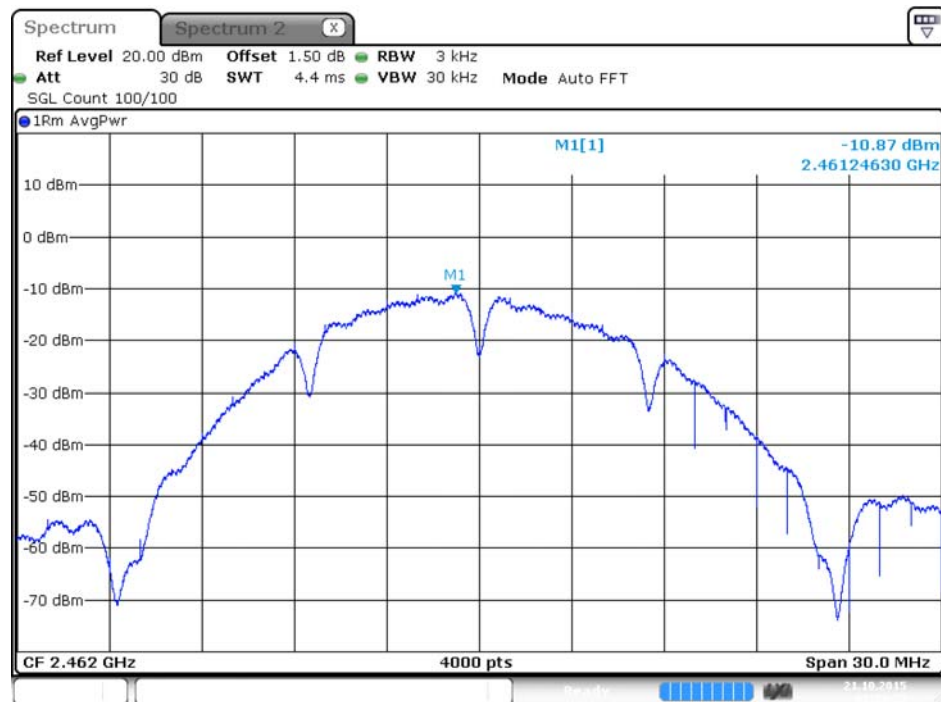


Date: 21.OCT.2015 01:24:23

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 4

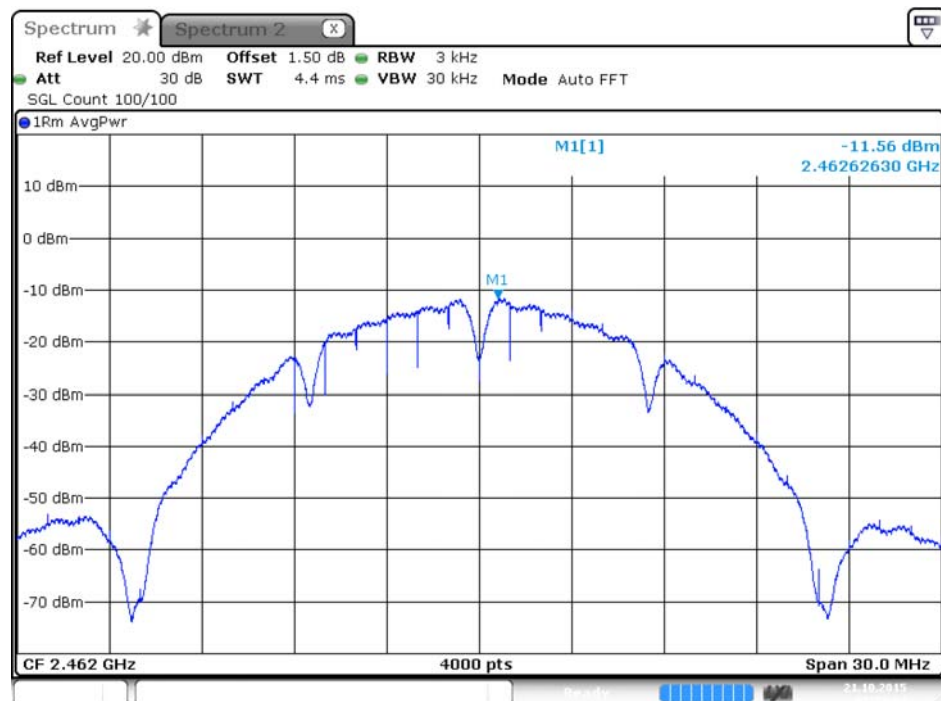


Date: 21.OCT.2015 01:24:04


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

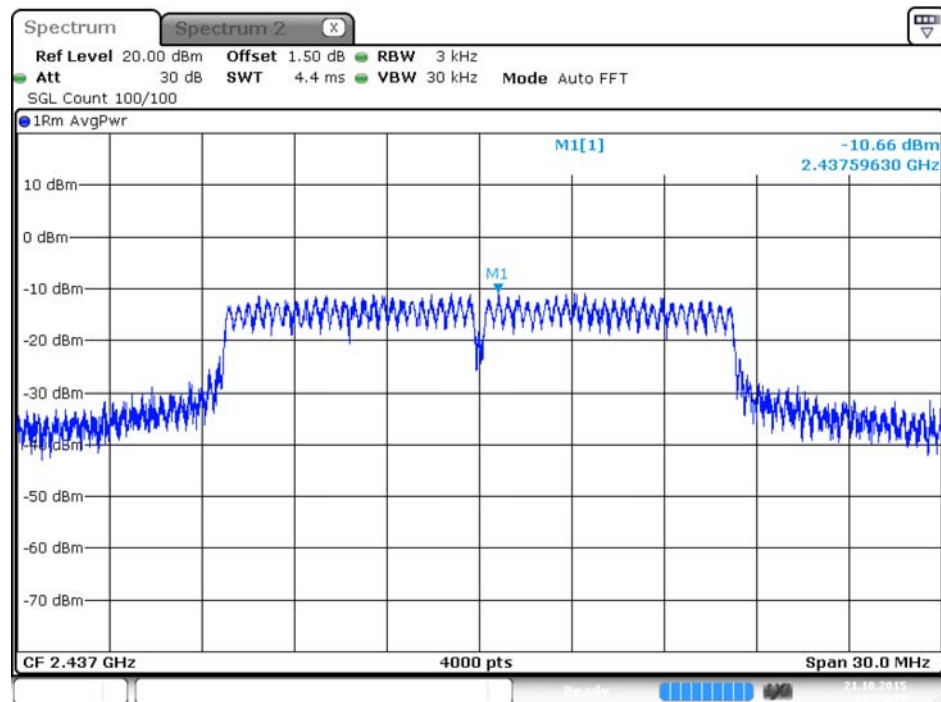

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

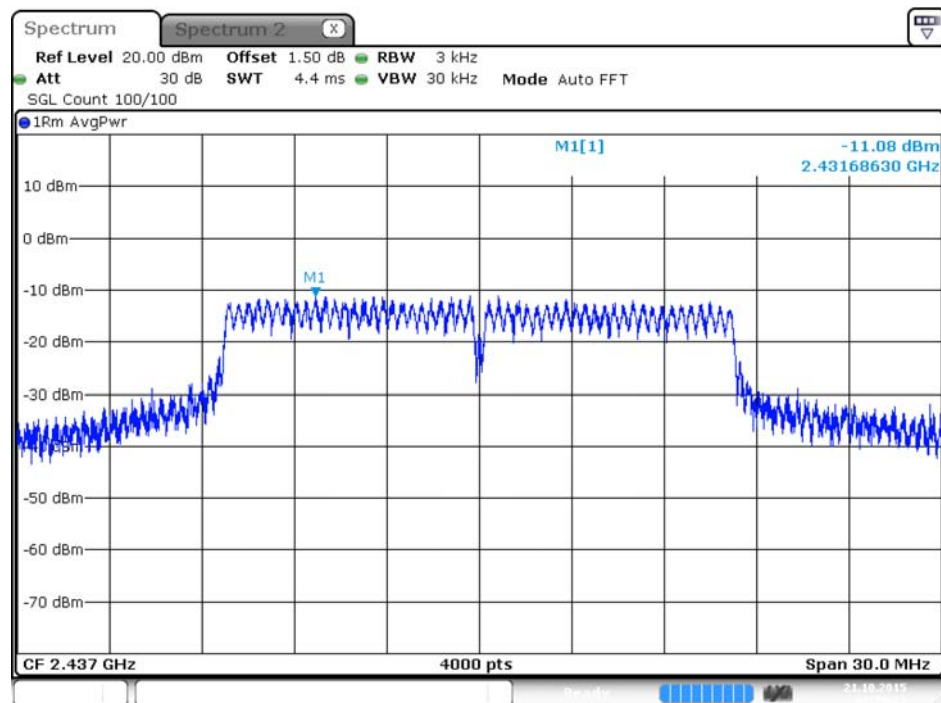


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

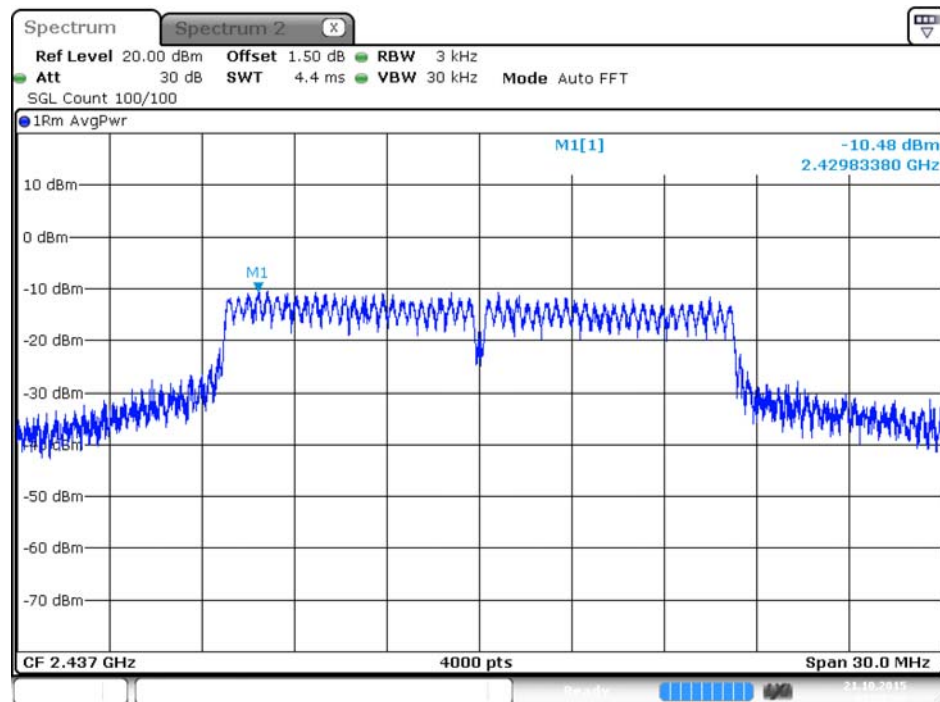


Date: 21.OCT.2015 01:28:48

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

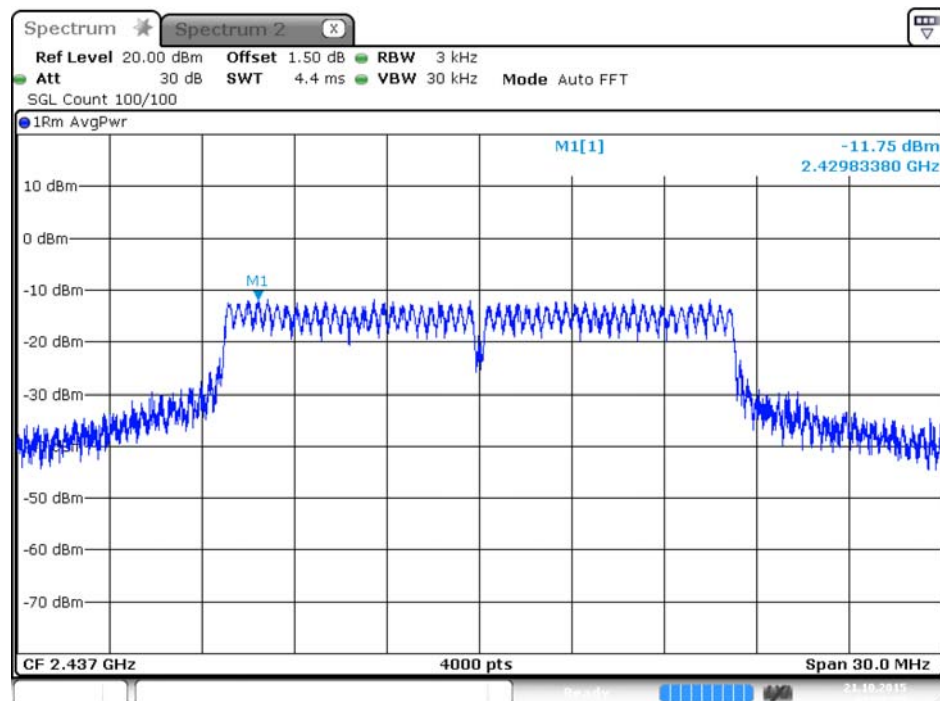


Date: 21.OCT.2015 01:28:29

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

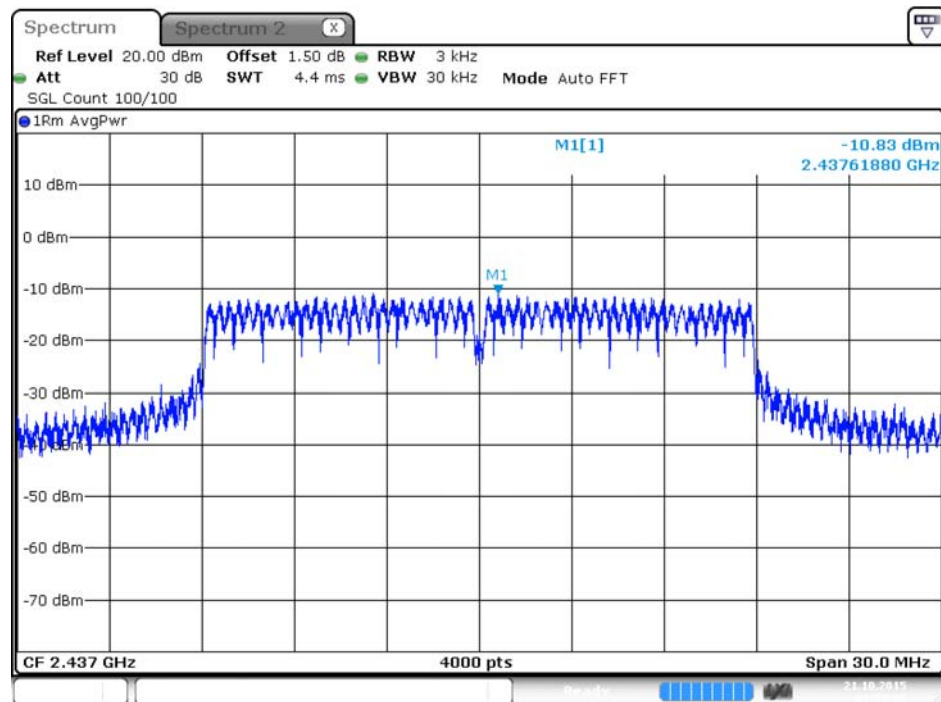


Date: 21.OCT.2015 01:35:36

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

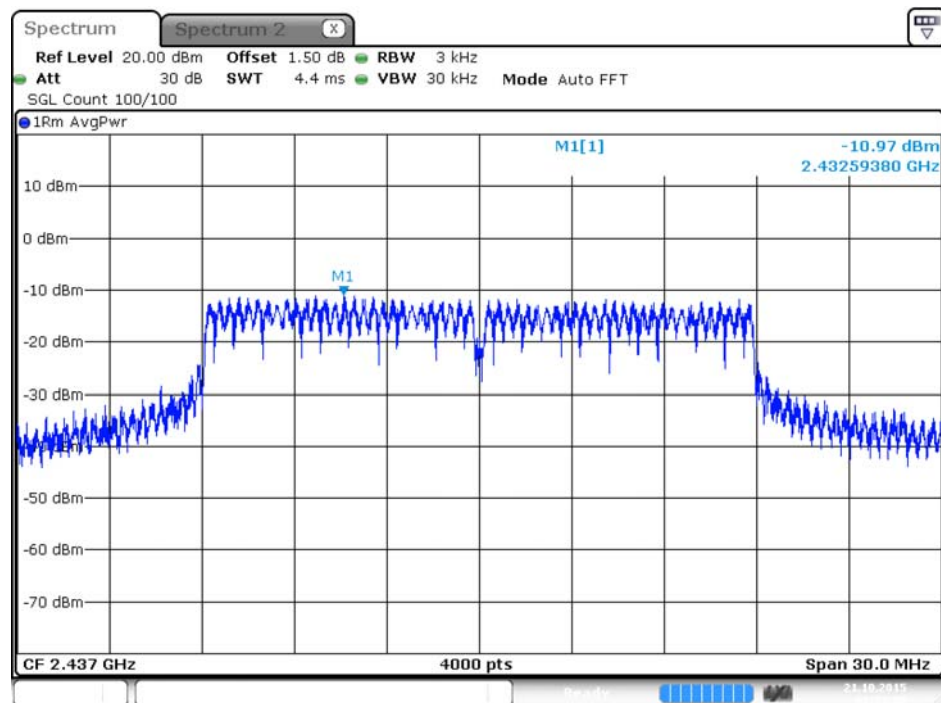


Date: 21.OCT.2015 01:35:20

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

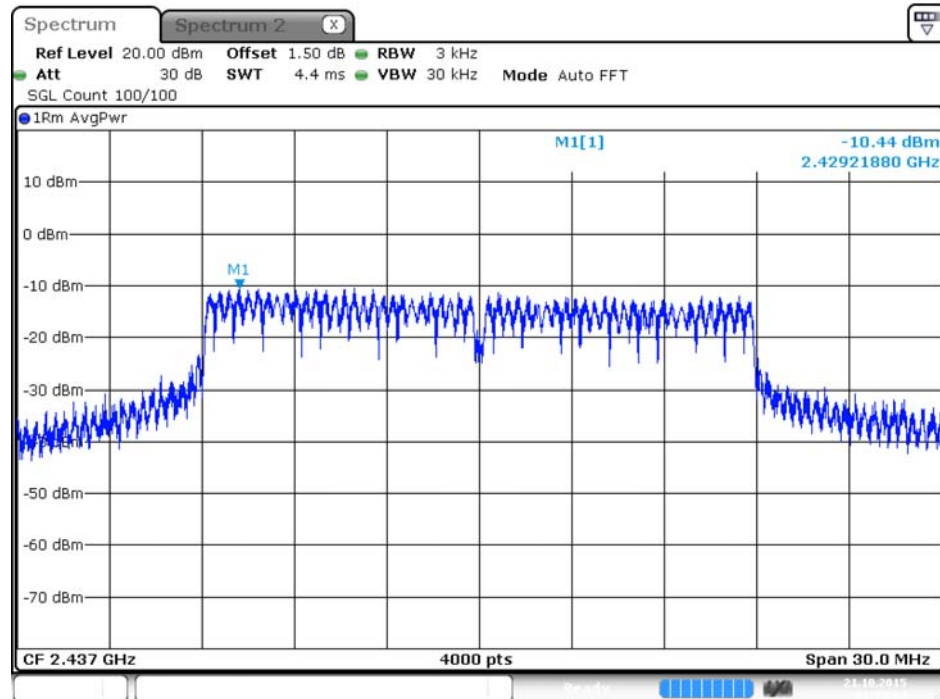


Date: 21.OCT.2015 01:35:04

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 4

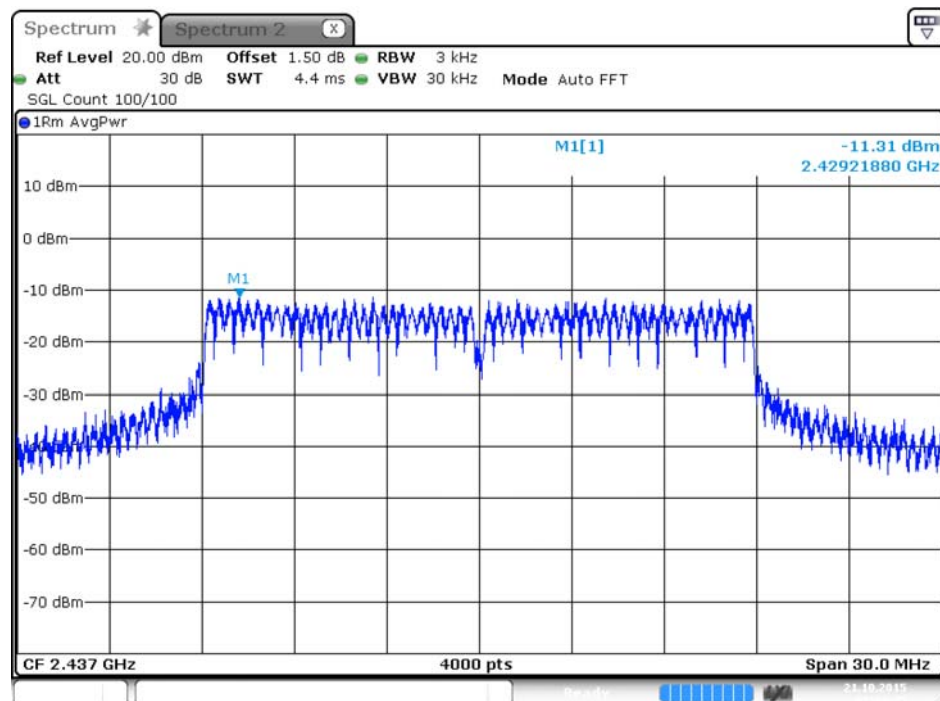


Date: 21.OCT.2015 01:34:45

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

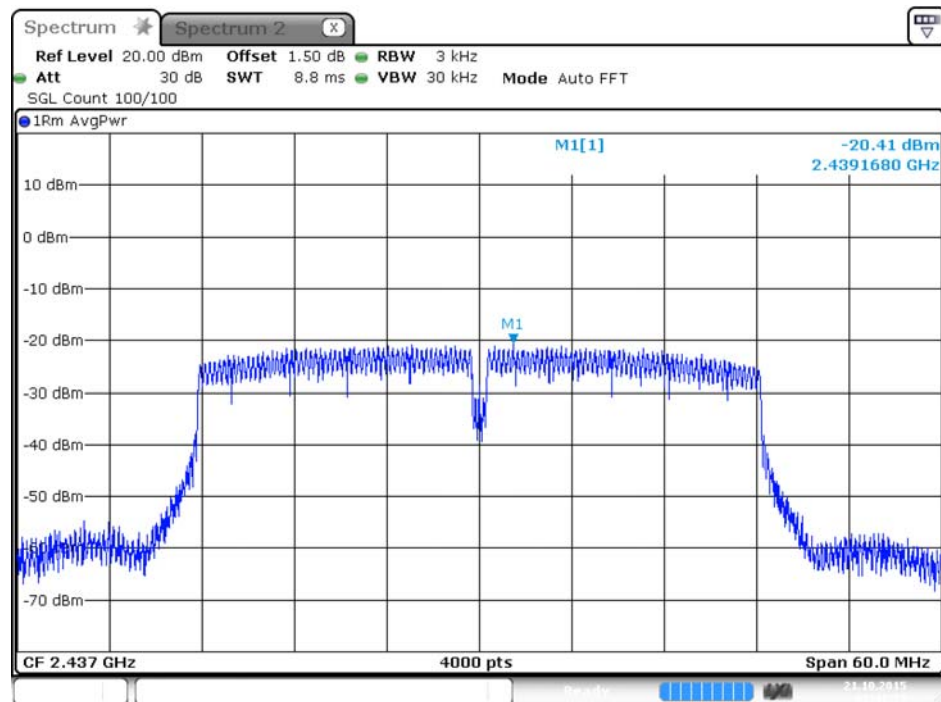


Date: 21.OCT.2015 01:41:39

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

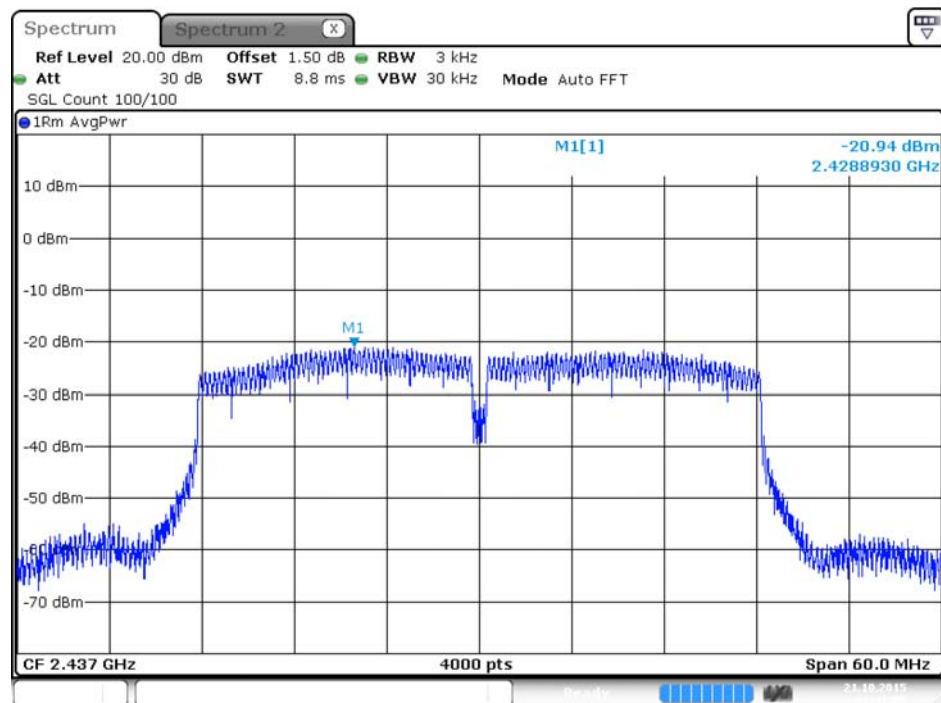


Date: 21.OCT.2015 01:41:58

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

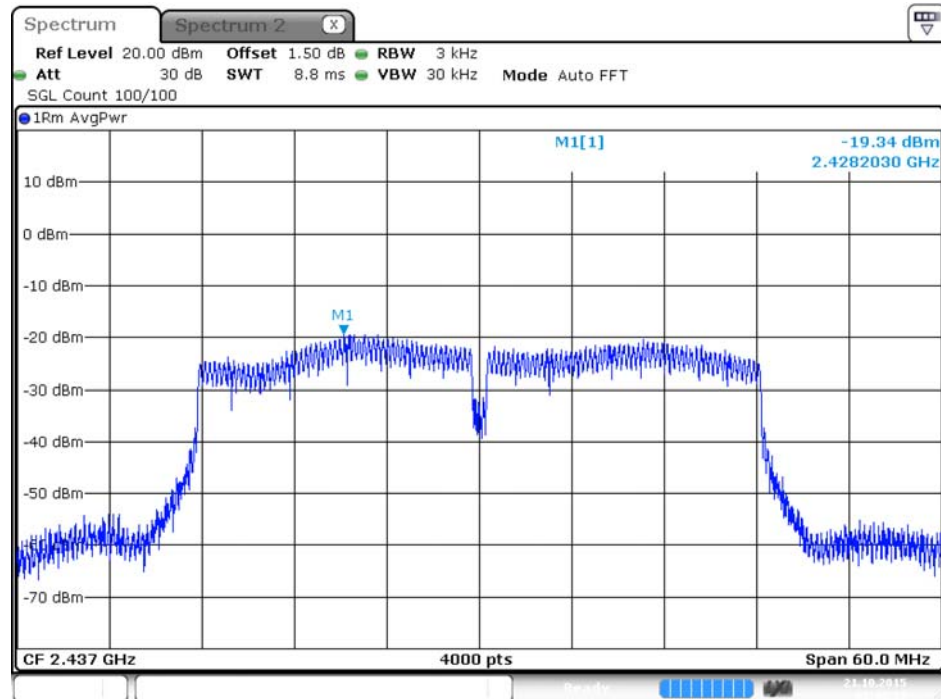

Date: 21.OCT.2015 01:42:19

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 4

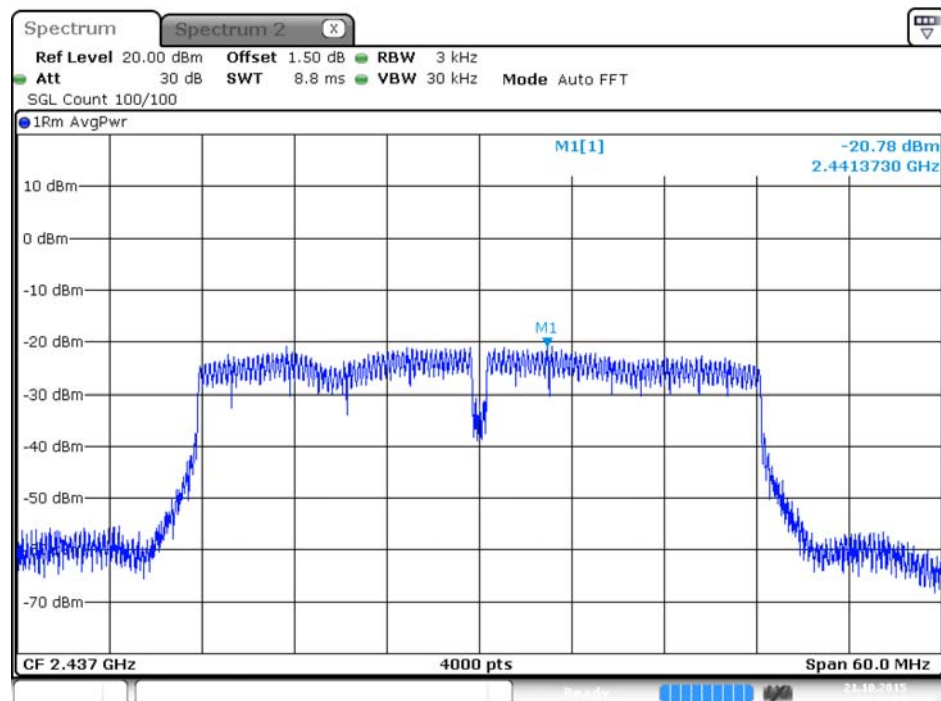

Date: 21.OCT.2015 01:42:39

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth= > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	3.71	14.50	500	Complies
	2437 MHz	4.06	14.15	500	Complies
	2462 MHz	4.06	13.89	500	Complies
802.11g	2412 MHz	9.80	15.63	500	Complies
	2437 MHz	5.57	19.80	500	Complies
	2462 MHz	8.87	14.93	500	Complies
802.11n MCS0 HT20	2412 MHz	10.43	17.19	500	Complies
	2437 MHz	14.49	21.88	500	Complies
	2462 MHz	9.80	17.45	500	Complies
802.11n MCS0 HT40	2422 MHz	33.74	34.88	500	Complies
	2437 MHz	24.46	36.76	500	Complies
	2452 MHz	36.29	34.47	500	Complies

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	3.59	14.41	500	Complies
	2437 MHz	11.13	11.03	500	Complies
	2462 MHz	3.59	14.50	500	Complies
802.11g	2412 MHz	6.67	16.41	500	Complies
	2437 MHz	5.04	20.14	500	Complies
	2462 MHz	12.64	17.28	500	Complies
802.11n MCS0 HT20	2412 MHz	3.36	17.45	500	Complies
	2437 MHz	13.74	19.80	500	Complies
	2462 MHz	13.16	17.71	500	Complies
802.11n MCS0 HT40	2422 MHz	32.46	36.61	500	Complies
	2437 MHz	24.70	33.86	500	Complies
	2452 MHz	26.90	33.14	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi


6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

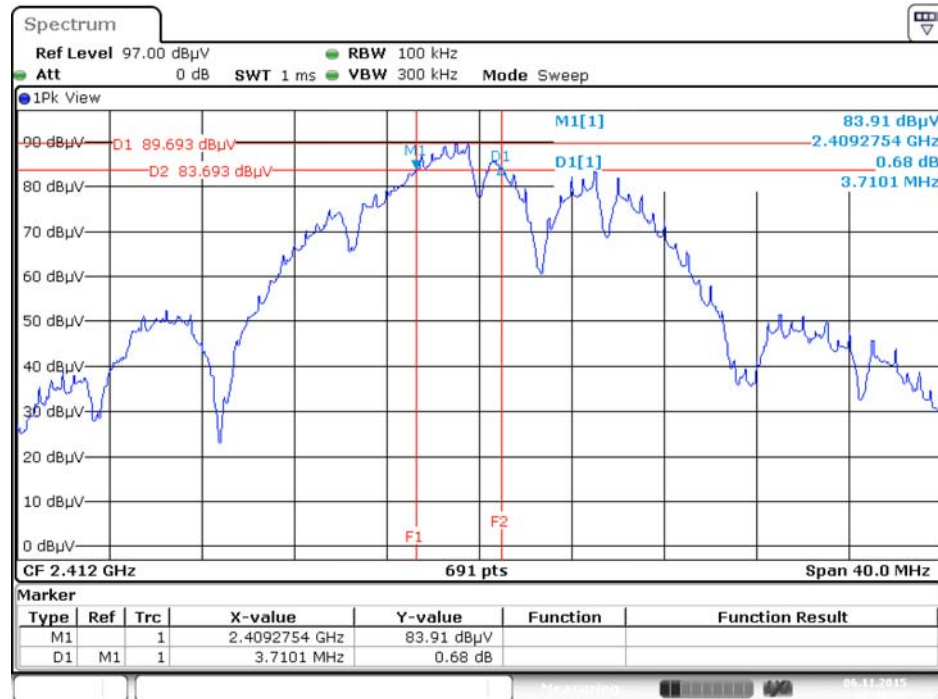

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

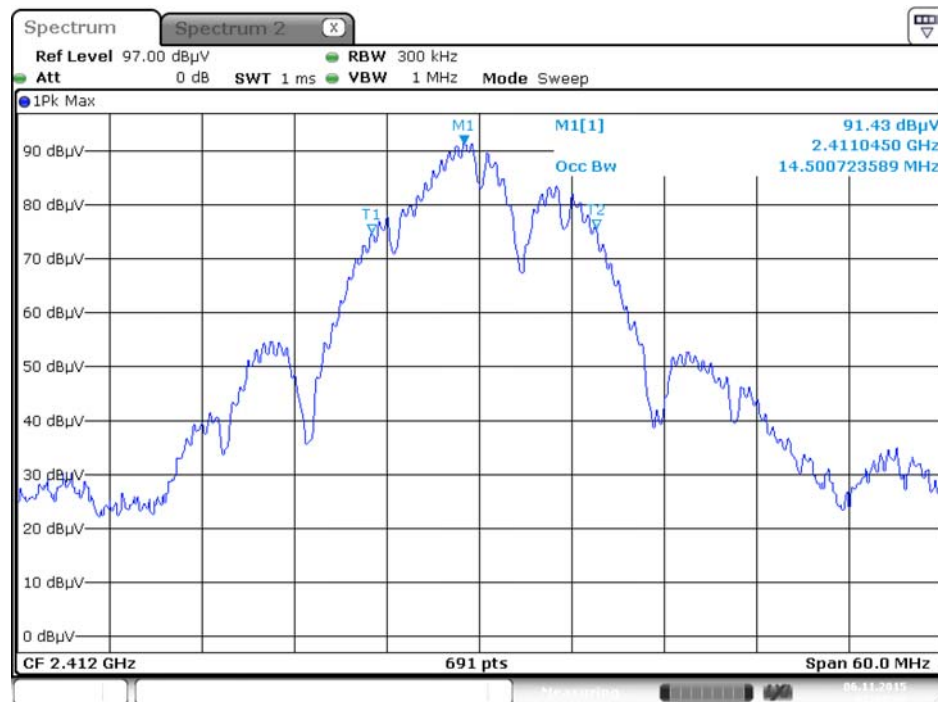


6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

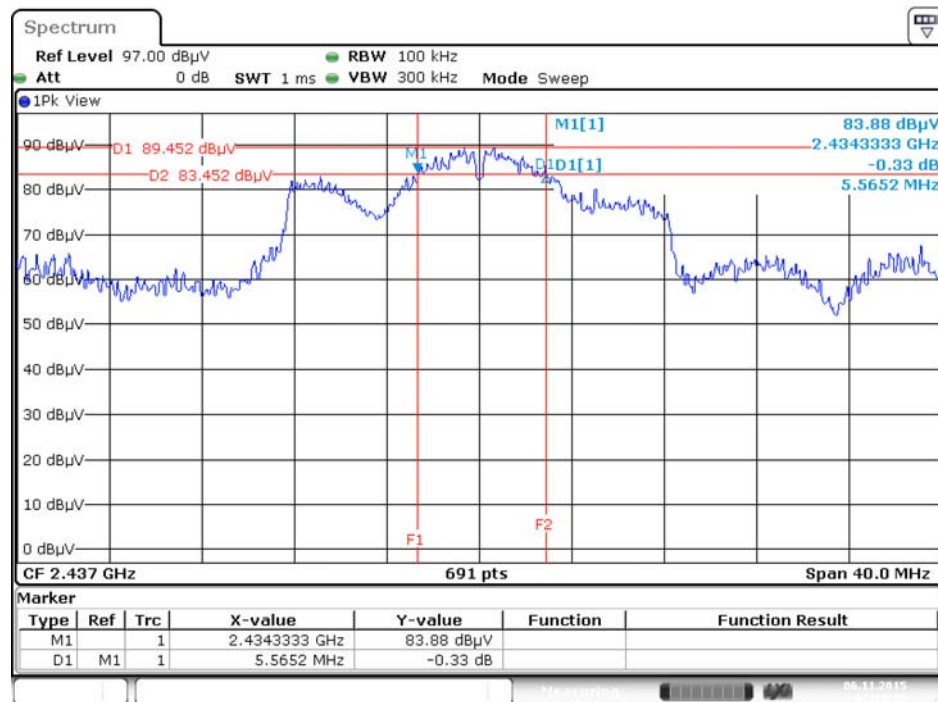


Date: 6.NOV.2015 02:15:35

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

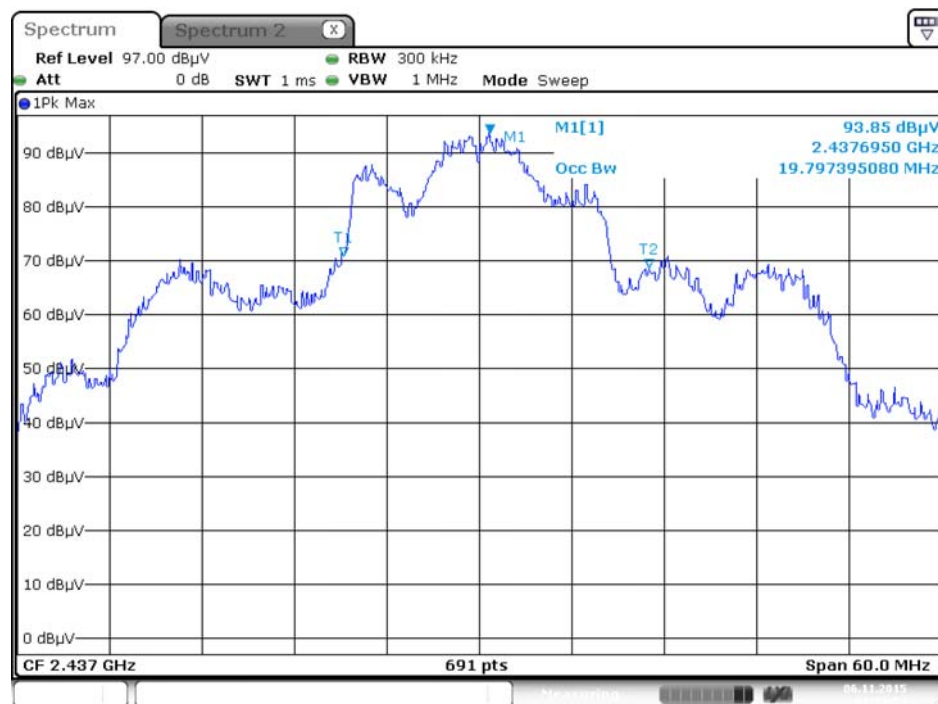

Date: 6.NOV.2015 01:59:54


6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

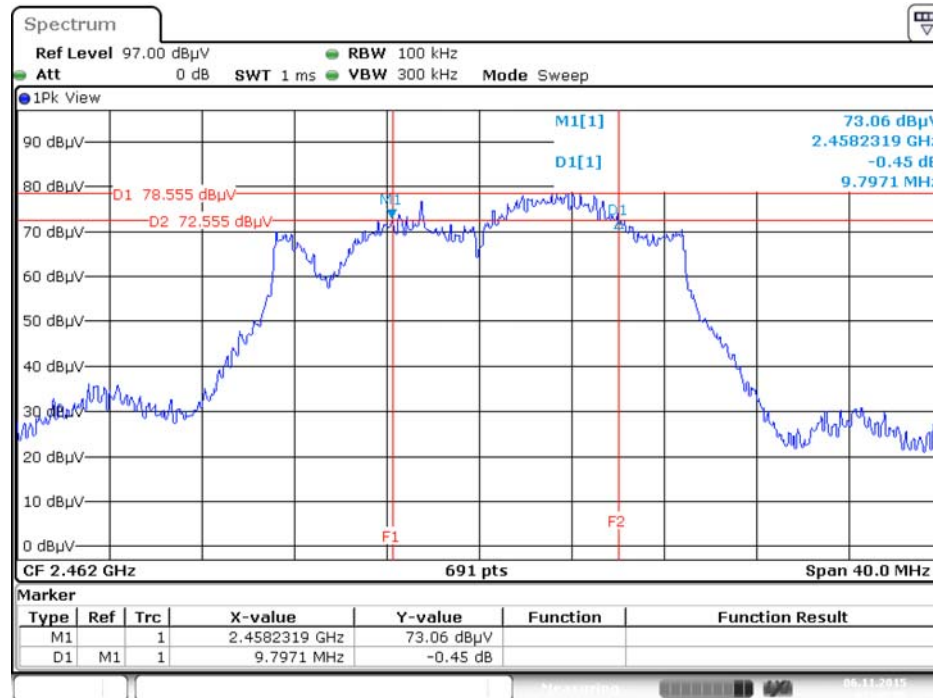

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

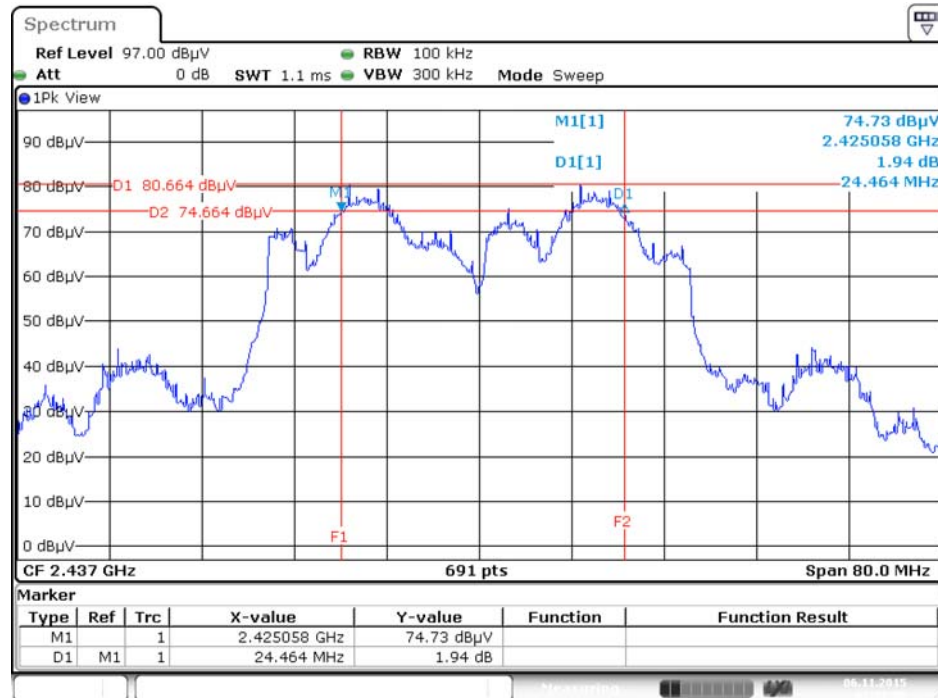

Date: 6.NOV.2015 02:38:07


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

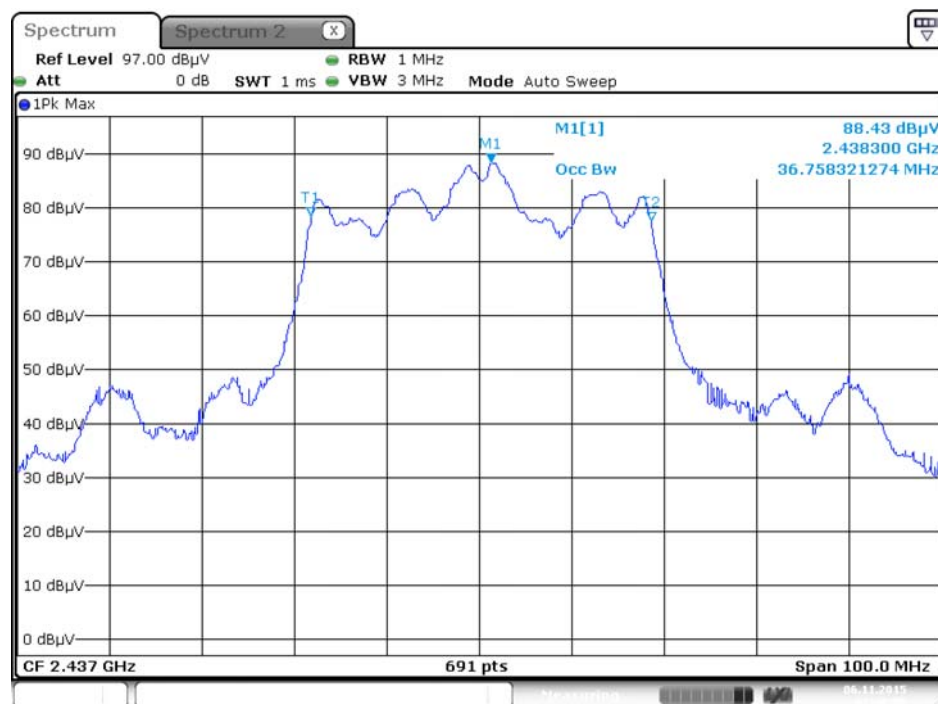

Date: 6.NOV.2015 02:48:57

Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

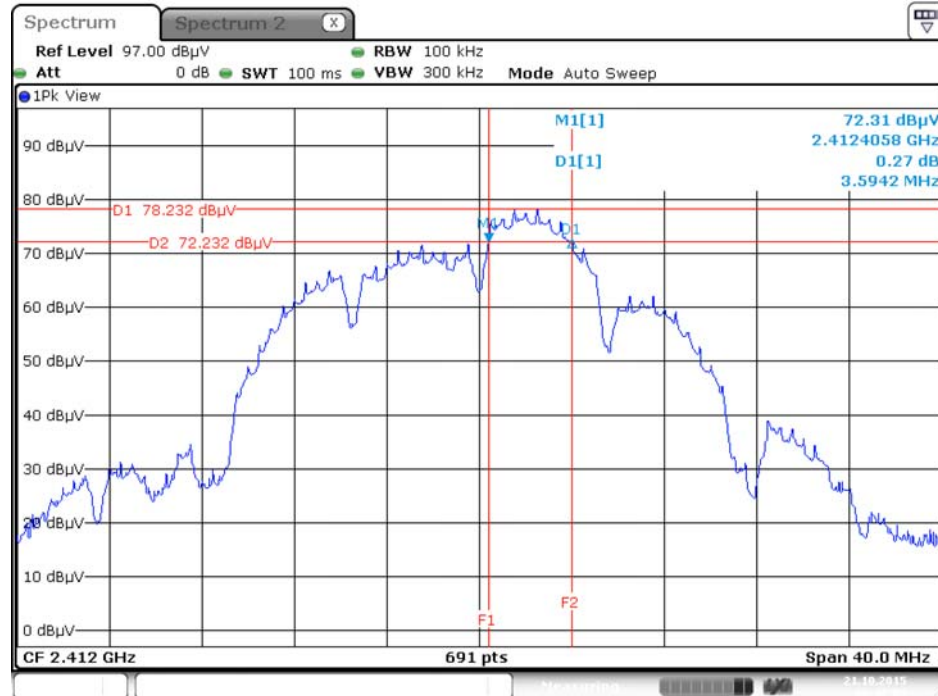


Date: 21.OCT.2015 00:47:03

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 21.OCT.2015 00:55:33

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

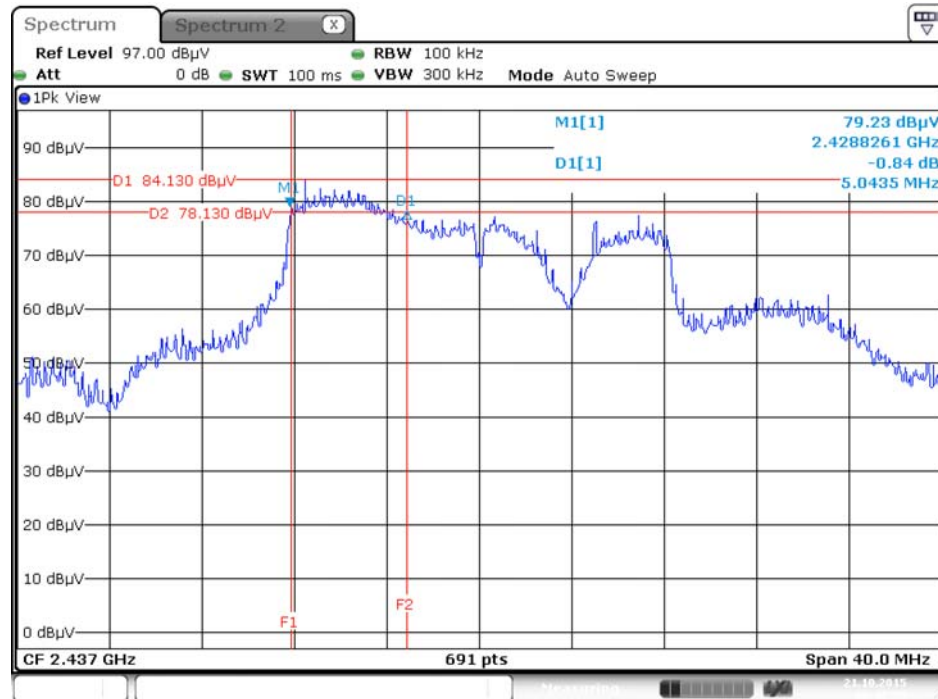


Date: 21.OCT.2015 00:47:52

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 21.OCT.2015 00:57:23

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

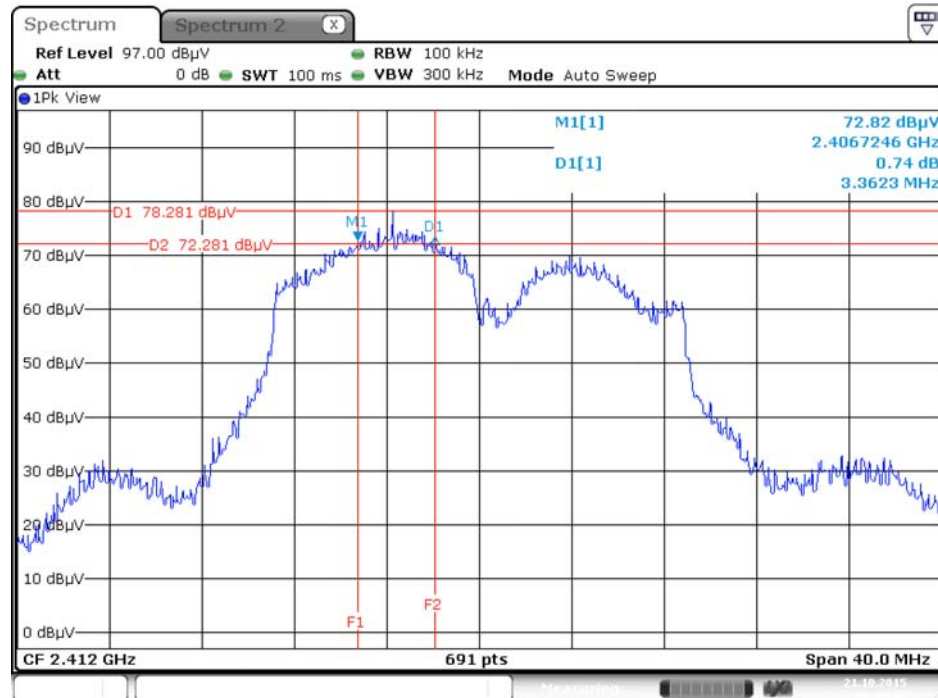


Date: 21.OCT.2015 00:49:49

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

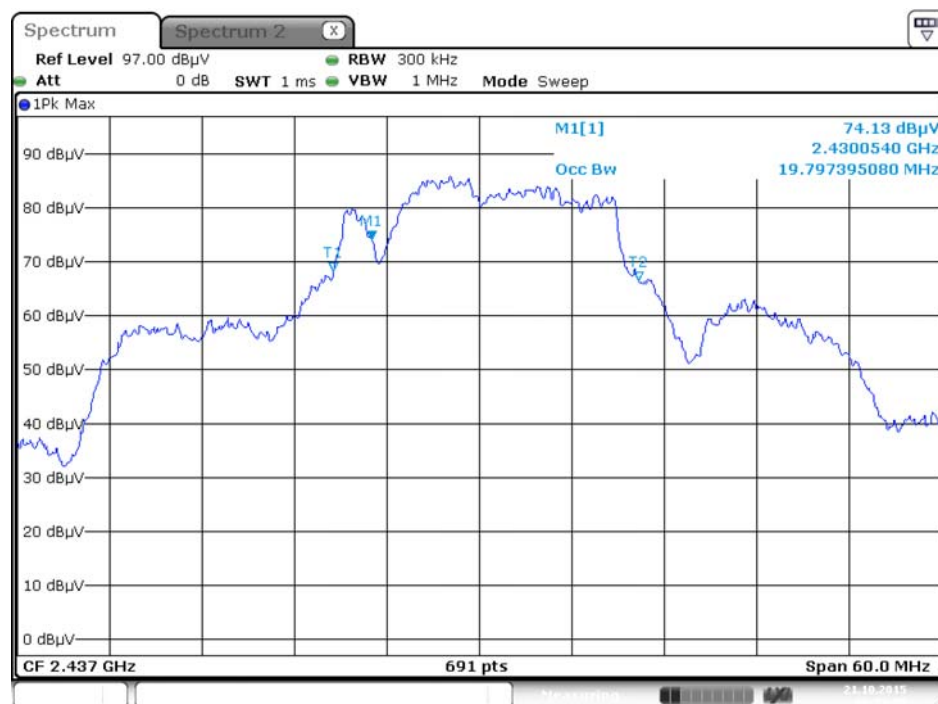


Date: 21.OCT.2015 00:59:00

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

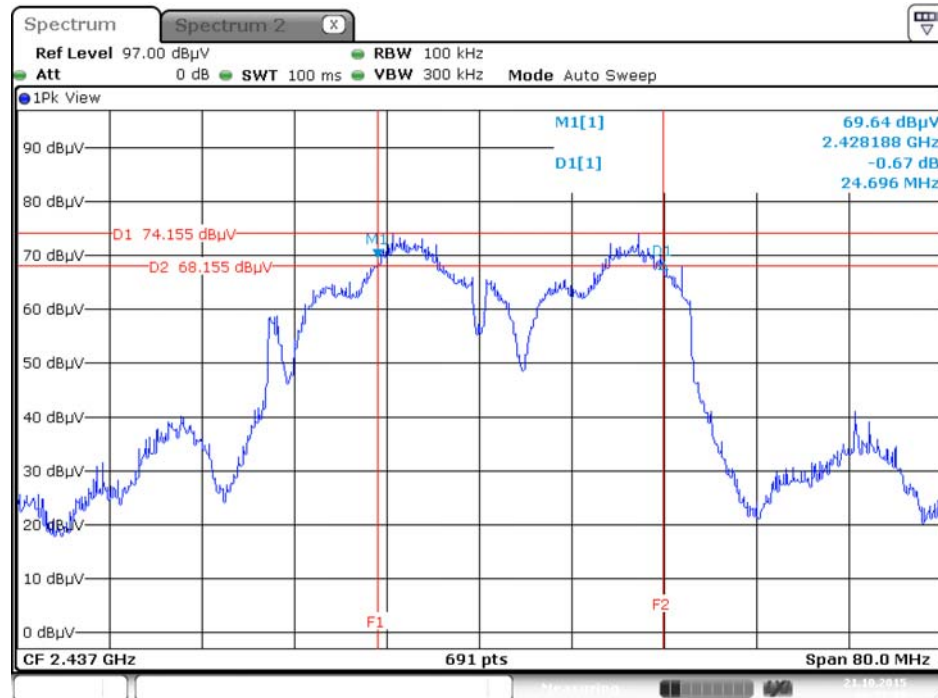

Date: 21.OCT.2015 00:52:37

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

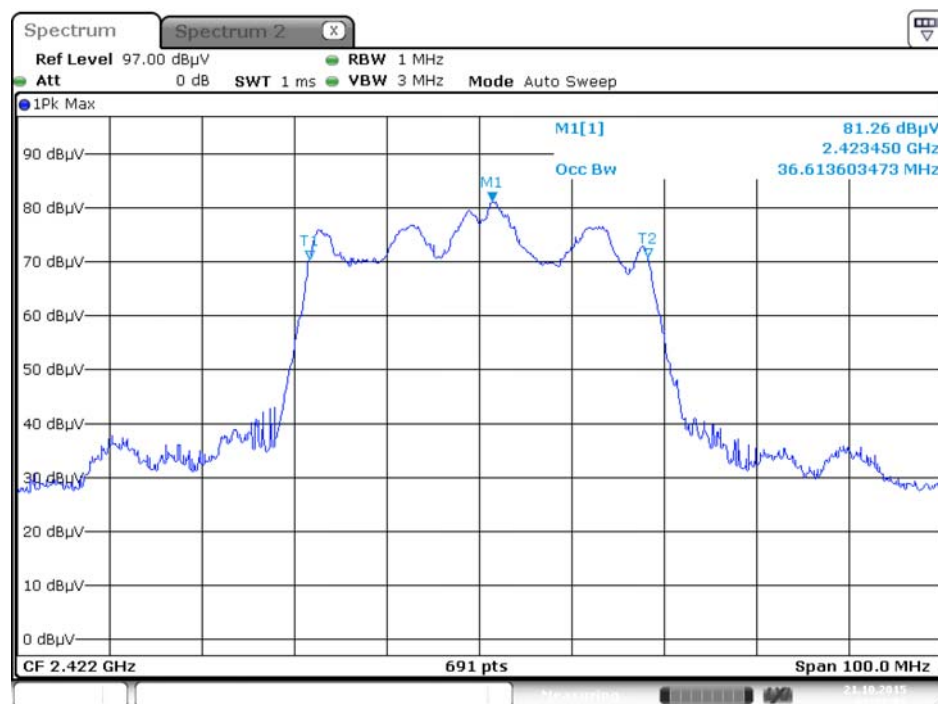

Date: 21.OCT.2015 01:01:01

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

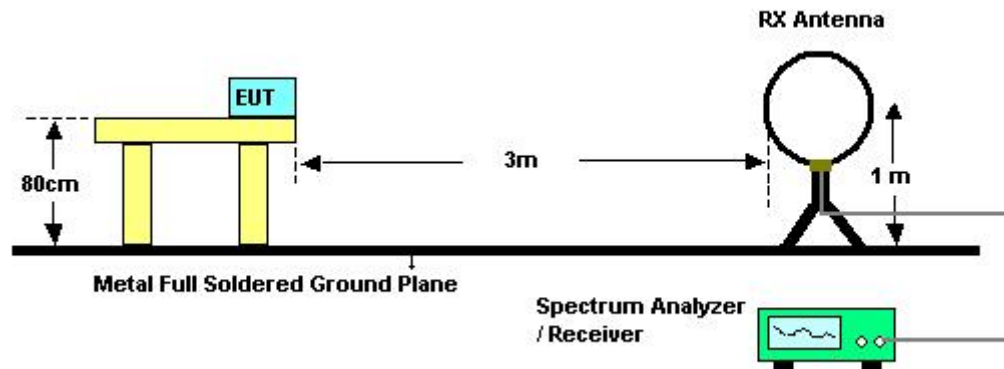

For Radiated Emissions: 30MHz~1GHz

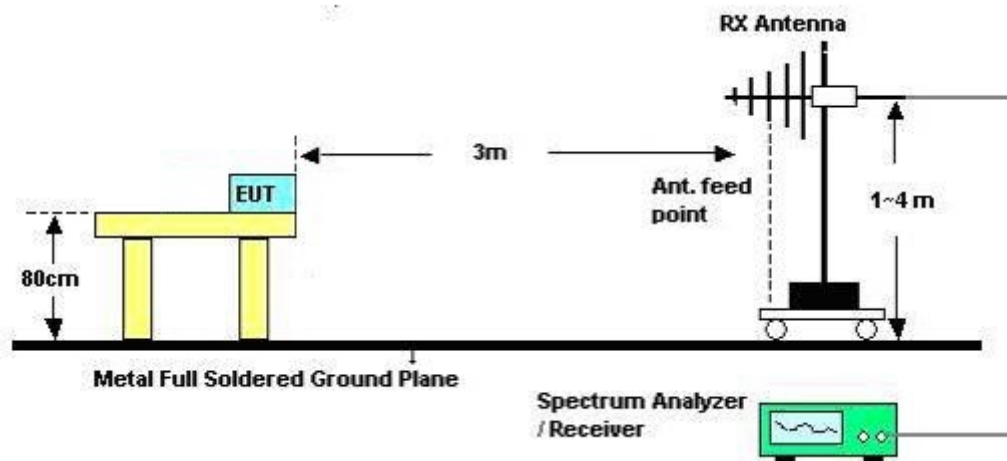

For Radiated Emissions: Above 1GHz

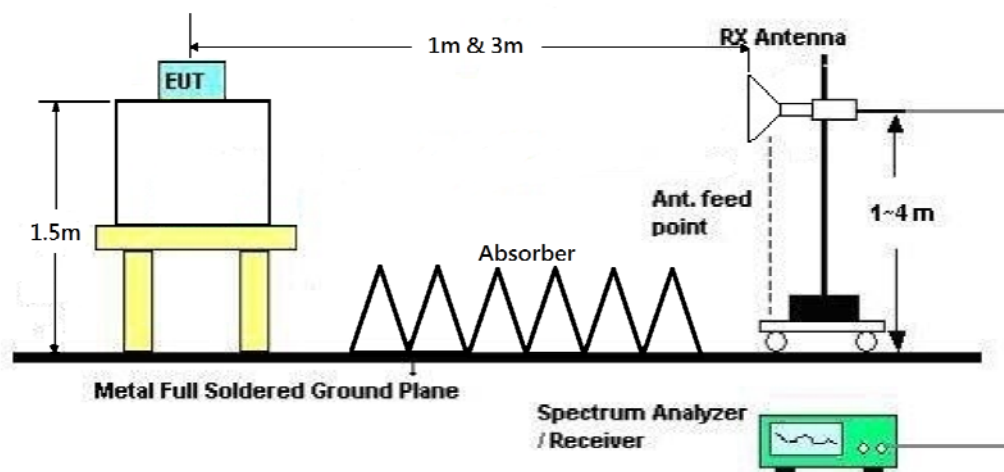

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	55%
Test Engineer	Akina Chiu	Configurations	Normal Link
Test Date	Mar. 02, 2016	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	55%
Test Engineer	Akina Chiu	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

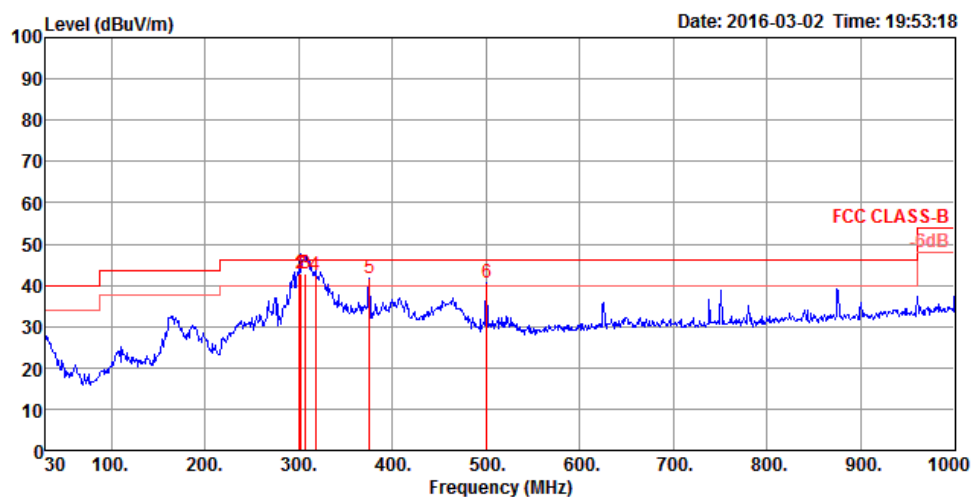

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	300.63	42.73	46.00	-3.27	53.53	1.48	20.00	32.28	150	254 QP	HORIZONTAL
2	302.57	42.98	46.00	-3.02	53.71	1.49	20.06	32.28	150	245 QP	HORIZONTAL
3	307.42	42.79	46.00	-3.21	53.35	1.50	20.22	32.28	100	247 QP	HORIZONTAL
4	318.09	42.38	46.00	-3.62	52.63	1.53	20.51	32.29	150	263 QP	HORIZONTAL
5	375.32	41.57	46.00	-4.43	50.14	1.67	22.08	32.32	100	29 Peak	HORIZONTAL
6	500.45	40.46	46.00	-5.54	46.84	1.94	24.03	32.35	100	181 Peak	HORIZONTAL

Vertical

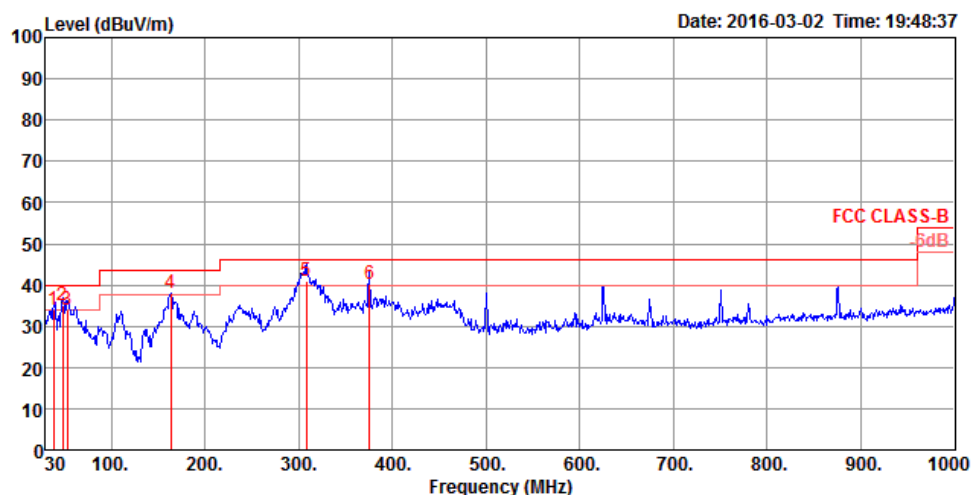

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	38.73	33.89	40.00	-6.11	44.83	0.54	20.93	32.41	100	94 QP	VERTICAL
2	48.43	34.94	40.00	-5.06	51.18	0.61	15.56	32.41	100	133 QP	VERTICAL
3	53.28	34.03	40.00	-5.97	51.32	0.64	14.48	32.41	100	245 QP	VERTICAL
4	163.86	37.84	43.50	-5.66	52.31	1.10	16.78	32.35	100	168 Peak	VERTICAL
5	308.39	41.09	46.00	-4.91	51.62	1.50	20.25	32.28	100	326 QP	VERTICAL
6	375.32	40.06	46.00	-5.94	48.63	1.67	22.08	32.32	200	0 QP	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	dB	cm	deg
1	4823.83	48.95	74.00	-25.05	44.67	5.87	33.42	35.01	Peak	228	40 HORIZONTAL
2	4823.96	43.24	54.00	-10.76	38.96	5.87	33.42	35.01	Average	228	40 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	dB	cm	deg
1	4823.98	48.10	54.00	-5.90	43.82	5.87	33.42	35.01	Average	233	211 VERTICAL
2	4824.20	51.93	74.00	-22.07	47.65	5.87	33.42	35.01	Peak	233	211 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Nov. 04, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.97	49.69	54.00	-4.31	45.25	5.92	33.53	35.01	Average	214	228 HORIZONTAL
2	4874.14	53.55	74.00	-20.45	49.11	5.92	33.53	35.01	Peak	214	228 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.95	52.21	54.00	-1.79	47.77	5.92	33.53	35.01	Average	120	166 VERTICAL
2	4874.00	55.36	74.00	-18.64	50.92	5.92	33.53	35.01	Peak	120	166 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.95	46.94	54.00	-7.06	42.76	5.79	32.88	34.49	132	104	Average	HORIZONTAL
2	4924.00	51.35	74.00	-22.65	47.17	5.79	32.88	34.49	132	104	Peak	HORIZONTAL
3	7383.78	50.39	74.00	-23.61	41.00	6.80	37.36	34.77	251	153	Peak	HORIZONTAL
4	7387.55	38.08	54.00	-15.92	28.69	6.80	37.36	34.77	251	153	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.92	55.34	74.00	-18.66	51.16	5.79	32.88	34.49	194	107	Peak	VERTICAL
2	4923.94	52.34	54.00	-1.66	48.16	5.79	32.88	34.49	194	107	Average	VERTICAL
3	7384.84	50.53	74.00	-23.47	41.14	6.80	37.36	34.77	213	174	Peak	VERTICAL
4	7387.02	38.26	54.00	-15.74	28.87	6.80	37.36	34.77	213	174	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4825.87	33.52	54.00	-20.48	29.24	5.87	33.42	35.01	Average	139	237 HORIZONTAL
2	4827.84	46.13	74.00	-27.87	41.85	5.87	33.42	35.01	Peak	139	237 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	4820.56	33.59	54.00	-20.41	29.31	5.87	33.42	35.01	Average	180	97 VERTICAL
2	4821.69	45.89	74.00	-28.11	41.61	5.87	33.42	35.01	Peak	180	97 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4876.24	39.13	54.00	-14.87	34.69	5.92	33.53	35.01	Average	244	40 HORIZONTAL
2	4876.89	52.19	74.00	-21.81	47.75	5.92	33.53	35.01	Peak	244	40 HORIZONTAL
3	7311.45	49.69	74.00	-24.31	41.46	7.13	36.38	35.28	Peak	157	172 HORIZONTAL
4	7314.52	36.94	54.00	-17.06	28.71	7.13	36.38	35.28	Average	157	172 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4876.17	41.58	54.00	-12.42	37.14	5.92	33.53	35.01	Average	217	179 VERTICAL
2	4876.89	55.56	74.00	-18.44	51.12	5.92	33.53	35.01	Peak	217	179 VERTICAL
3	7306.60	37.12	54.00	-16.88	28.89	7.13	36.38	35.28	Average	171	224 VERTICAL
4	7315.95	50.24	74.00	-23.76	41.96	7.14	36.42	35.28	Peak	171	224 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4914.01	32.87	54.00	-21.13	28.32	5.95	33.61	35.01	Average	188	199	HORIZONTAL
2	4945.06	45.80	74.00	-28.20	41.14	5.98	33.69	35.01	Peak	188	199	HORIZONTAL
3	7384.63	37.31	54.00	-16.69	28.86	7.17	36.57	35.29	Average	157	271	HORIZONTAL
4	7388.40	50.26	74.00	-23.74	41.81	7.17	36.57	35.29	Peak	157	271	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4927.55	47.41	74.00	-26.59	42.80	5.97	33.65	35.01	Peak	232	218	VERTICAL
2	4927.84	34.82	54.00	-19.18	30.21	5.97	33.65	35.01	Average	232	218	VERTICAL
3	7384.29	49.88	74.00	-24.12	41.43	7.17	36.57	35.29	Peak	200	157	VERTICAL
4	7386.26	37.29	54.00	-16.71	28.84	7.17	36.57	35.29	Average	200	157	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4820.41	33.35	54.00	-20.65	29.07	5.87	33.42	35.01	Average	125	236 HORIZONTAL
2	4822.67	45.98	74.00	-28.02	41.70	5.87	33.42	35.01	Peak	125	236 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4819.89	33.79	54.00	-20.21	29.51	5.87	33.42	35.01	Average	162	147 VERTICAL
2	4825.46	46.75	74.00	-27.25	42.47	5.87	33.42	35.01	Peak	162	147 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4876.61	48.53	74.00	-25.47	44.09	5.92	33.53	35.01 Peak	300	221	HORIZONTAL
2	4877.11	36.00	54.00	-18.00	31.56	5.92	33.53	35.01 Average	300	221	HORIZONTAL
3	7306.56	49.88	74.00	-24.12	41.65	7.13	36.38	35.28 Peak	208	177	HORIZONTAL
4	7310.29	37.06	54.00	-16.94	28.83	7.13	36.38	35.28 Average	208	177	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4876.46	54.25	74.00	-19.75	49.81	5.92	33.53	35.01 Peak	264	208	VERTICAL
2	4876.75	40.58	54.00	-13.42	36.14	5.92	33.53	35.01 Average	264	208	VERTICAL
3	7306.01	49.78	74.00	-24.22	41.55	7.13	36.38	35.28 Peak	208	129	VERTICAL
4	7307.80	36.98	54.00	-17.02	28.75	7.13	36.38	35.28 Average	208	129	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.68	46.04	74.00	-27.96	41.43	5.97	33.65	35.01	Peak	189	114	HORIZONTAL
2	4925.66	32.93	54.00	-21.07	28.32	5.97	33.65	35.01	Average	189	114	HORIZONTAL
3	7390.17	50.37	74.00	-23.63	41.92	7.17	36.57	35.29	Peak	148	183	HORIZONTAL
4	7390.67	37.57	54.00	-16.43	29.12	7.17	36.57	35.29	Average	148	183	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4924.58	45.91	74.00	-28.09	41.30	5.97	33.65	35.01	Peak	208	138	VERTICAL
2	4925.16	32.82	54.00	-21.18	28.21	5.97	33.65	35.01	Average	208	138	VERTICAL
3	7387.71	37.46	54.00	-16.54	29.01	7.17	36.57	35.29	Average	148	241	VERTICAL
4	7390.95	50.62	74.00	-23.38	42.17	7.17	36.57	35.29	Peak	148	241	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	
1	4840.51	45.59	74.00	-28.41	41.26	5.88	33.46	35.01	Peak	215	302	HORIZONTAL
2	4846.36	32.84	54.00	-21.16	28.51	5.88	33.46	35.01	Average	215	302	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	
1	4845.20	32.88	54.00	-21.12	28.55	5.88	33.46	35.01	Average	166	177	VERTICAL
2	4848.12	46.49	74.00	-27.51	42.16	5.88	33.46	35.01	Peak	166	177	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4870.54	33.43	54.00	-20.57	28.99	5.92	33.53	35.01	Average	188	158 HORIZONTAL
2	4875.20	46.67	74.00	-27.33	42.23	5.92	33.53	35.01	Peak	188	158 HORIZONTAL
3	7306.22	37.02	54.00	-16.98	28.79	7.13	36.38	35.28	Average	137	244 HORIZONTAL
4	7311.13	49.89	74.00	-24.11	41.66	7.13	36.38	35.28	Peak	137	244 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4875.49	33.78	54.00	-20.22	29.34	5.92	33.53	35.01	Average	154	218 VERTICAL
2	4877.18	46.03	74.00	-27.97	41.59	5.92	33.53	35.01	Peak	154	218 VERTICAL
3	7307.60	37.29	54.00	-16.71	29.06	7.13	36.38	35.28	Average	137	169 VERTICAL
4	7307.87	50.01	74.00	-23.99	41.78	7.13	36.38	35.28	Peak	137	169 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4903.70	45.91	74.00	-28.09	41.36	5.95	33.61	35.01 Peak	158	51	HORIZONTAL
2	4905.97	33.11	54.00	-20.89	28.56	5.95	33.61	35.01 Average	158	51	HORIZONTAL
3	7354.66	50.39	74.00	-23.61	42.01	7.16	36.50	35.28 Peak	111	265	HORIZONTAL
4	7357.81	37.66	54.00	-16.34	29.28	7.16	36.50	35.28 Average	111	265	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4903.00	32.87	54.00	-21.13	28.32	5.95	33.61	35.01 Average	136	232	VERTICAL
2	4904.60	43.10	74.00	-30.90	38.55	5.95	33.61	35.01 Peak	136	232	VERTICAL
3	7353.63	50.69	74.00	-23.31	42.31	7.16	36.50	35.28 Peak	163	106	VERTICAL
4	7354.45	37.52	54.00	-16.48	29.14	7.16	36.50	35.28 Average	163	106	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 15, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4823.97	49.56	54.00	-4.44	45.28	5.87	33.42	35.01	Average	118	17 HORIZONTAL
2	4824.04	53.56	74.00	-20.44	49.28	5.87	33.42	35.01	Peak	118	17 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4824.01	52.66	54.00	-1.34	48.38	5.87	33.42	35.01	Average	144	324 VERTICAL
2	4824.08	56.53	74.00	-17.47	52.25	5.87	33.42	35.01	Peak	144	324 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 15, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4873.85	52.01	74.00	-21.99	47.57	5.92	33.53	35.01	Peak	164	357 HORIZONTAL
2	4873.97	45.96	54.00	-8.04	41.52	5.92	33.53	35.01	Average	164	357 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4873.98	50.25	54.00	-3.75	45.81	5.92	33.53	35.01	Average	150	328 VERTICAL
2	4874.02	55.05	74.00	-18.95	50.61	5.92	33.53	35.01	Peak	150	328 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 15, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.97	40.92	54.00	-13.08	36.31	5.97	33.65	35.01	Average	166	359 HORIZONTAL
2	4924.16	49.96	74.00	-24.04	45.35	5.97	33.65	35.01	Peak	166	359 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.90	51.54	74.00	-22.46	46.93	5.97	33.65	35.01	Peak	200	342 VERTICAL
2	4924.00	44.87	54.00	-9.13	40.26	5.97	33.65	35.01	Average	200	342 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4823.65	33.58	54.00	-20.42	29.30	5.87	33.42	35.01	Average	154	156 HORIZONTAL
2	4824.64	46.55	74.00	-27.45	42.27	5.87	33.42	35.01	Peak	154	156 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4815.43	33.36	54.00	-20.64	29.14	5.85	33.38	35.01	Average	151	162 VERTICAL
2	4824.20	46.80	74.00	-27.20	42.52	5.87	33.42	35.01	Peak	151	162 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4867.60	34.64	54.00	-19.36	30.20	5.92	33.53	35.01	Average	150	166 HORIZONTAL
2	4874.00	48.47	74.00	-25.53	44.03	5.92	33.53	35.01	Peak	150	166 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4872.70	34.10	54.00	-19.90	29.66	5.92	33.53	35.01	Average	155	137 VERTICAL
2	4877.16	46.92	74.00	-27.08	42.48	5.92	33.53	35.01	Peak	155	137 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4926.03	33.68	54.00	-20.32	29.07	5.97	33.65	35.01	Average	162	142 HORIZONTAL
2	4926.23	46.64	74.00	-27.36	42.03	5.97	33.65	35.01	Peak	162	142 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4927.91	47.86	74.00	-26.14	43.25	5.97	33.65	35.01	Peak	162	142 VERTICAL
2	4929.38	33.62	54.00	-20.38	29.01	5.97	33.65	35.01	Average	162	142 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4816.33	34.63	54.00	-19.37	30.41	5.85	33.38	35.01	Average	160	155 HORIZONTAL
2	4817.60	47.76	74.00	-26.24	43.48	5.87	33.42	35.01	Peak	160	155 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4822.67	33.46	54.00	-20.54	29.18	5.87	33.42	35.01	Average	159	151 VERTICAL
2	4829.41	46.49	74.00	-27.51	42.21	5.87	33.42	35.01	Peak	159	151 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4944.09	46.76	74.00	-27.24	42.10	5.98	33.69	35.01	Peak	157	155 HORIZONTAL
2	4944.23	33.66	54.00	-20.34	29.00	5.98	33.69	35.01	Average	157	155 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4940.30	47.07	74.00	-26.93	42.41	5.98	33.69	35.01	Peak	155	174 VERTICAL
2	4945.71	33.69	54.00	-20.31	29.03	5.98	33.69	35.01	Average	155	174 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4915.23	46.32	74.00	-27.68	41.77	5.95	33.61	35.01	Peak	160	215 HORIZONTAL
2	4928.28	33.69	54.00	-20.31	29.08	5.97	33.65	35.01	Average	160	215 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4925.97	33.48	54.00	-20.52	28.87	5.97	33.65	35.01	Average	157	202 VERTICAL
2	4930.34	47.13	74.00	-26.87	42.52	5.97	33.65	35.01	Peak	157	202 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	4836.74	35.47	54.00	-18.53	31.14	5.88	33.46	35.01	Average	156	182 HORIZONTAL
2	4837.58	47.47	74.00	-26.53	43.14	5.88	33.46	35.01	Peak	156	182 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	4844.00	34.35	54.00	-19.65	30.02	5.88	33.46	35.01	Average	158	198 VERTICAL
2	4844.67	47.02	74.00	-26.98	42.69	5.88	33.46	35.01	Peak	158	198 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4867.11	33.95	54.00	-20.05	29.56	5.90	33.50	35.01	154	9	HORIZONTAL
2	4868.01	46.94	74.00	-27.06	42.50	5.92	33.53	35.01	154	9	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.54	33.89	54.00	-20.11	29.45	5.92	33.53	35.01	157	18	VERTICAL
2	4875.91	46.75	74.00	-27.25	42.31	5.92	33.53	35.01	157	18	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4904.98	46.88	74.00	-27.12	42.33	5.95	33.61	35.01	Peak	154	55 HORIZONTAL
2	4908.05	33.20	54.00	-20.80	28.65	5.95	33.61	35.01	Average	154	55 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	4903.16	33.12	54.00	-20.88	28.57	5.95	33.61	35.01	Average	154	66 VERTICAL
2	4913.87	46.87	74.00	-27.13	42.32	5.95	33.61	35.01	Peak	154	66 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB558074 D01 v03r04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2375.24	52.35	54.00	-1.65	20.09	4.08	28.18	0.00	Average	100	205	VERTICAL
2	2387.69	62.37	74.00	-11.63	30.07	4.09	28.21	0.00	Peak	100	205	VERTICAL
3	2413.45	120.51			88.16	4.11	28.24	0.00	Peak	100	205	VERTICAL
4	2413.74	118.11			85.76	4.11	28.24	0.00	Average	100	205	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2355.80	59.43	74.00	-14.57	27.52	3.72	28.19	0.00	208	107	Peak	VERTICAL
2	2355.80	49.47	54.00	-4.53	17.56	3.72	28.19	0.00	208	107	Average	VERTICAL
3	2436.20	120.93			89.06	3.77	28.10	0.00	208	107	Peak	VERTICAL
4	2436.20	117.06			85.19	3.77	28.10	0.00	208	107	Average	VERTICAL
5	2483.50	48.28	54.00	-5.72	16.44	3.82	28.02	0.00	208	107	Average	VERTICAL
6	2484.60	58.10	74.00	-15.90	26.26	3.82	28.02	0.00	208	107	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2461.20	115.80			83.95	3.80	28.05	0.00	253	118	Peak	VERTICAL
2	2461.20	111.95			80.10	3.80	28.05	0.00	253	118	Average	VERTICAL
3	2488.00	60.42	74.00	-13.58	28.59	3.83	28.00	0.00	253	118	Peak	VERTICAL
4	2488.80	52.41	54.00	-1.59	20.58	3.83	28.00	0.00	253	118	Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 20, 2015 ~ Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	52.21	54.00	-1.79	19.91	4.09	28.21	0.00	Average	100	62 VERTICAL
2	2390.00	66.52	74.00	-7.48	34.22	4.09	28.21	0.00	Peak	100	62 VERTICAL
3	2409.68	115.17			82.82	4.11	28.24	0.00	Peak	100	62 VERTICAL
4	2409.97	105.04			72.69	4.11	28.24	0.00	Average	100	62 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.42	66.15	74.00	-7.85	33.85	4.09	28.21	0.00	Peak	121	25 VERTICAL
2	2390.00	52.90	54.00	-1.10	20.60	4.09	28.21	0.00	Average	121	25 VERTICAL
3	2433.53	125.79			93.39	4.12	28.28	0.00	Peak	121	25 VERTICAL
4	2433.82	115.57			83.17	4.12	28.28	0.00	Average	121	25 VERTICAL
5	2494.02	51.97	54.00	-2.03	19.40	4.17	28.40	0.00	Average	121	25 VERTICAL
6	2495.18	65.92	74.00	-8.08	33.35	4.17	28.40	0.00	Peak	121	25 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2469.24	102.64			70.16	4.14	28.34	0.00	Average	109	3 VERTICAL
2	2469.53	112.39			79.91	4.14	28.34	0.00	Peak	109	3 VERTICAL
3	2483.50	52.82	54.00	-1.18	20.29	4.16	28.37	0.00	Average	109	3 VERTICAL
4	2483.50	66.88	74.00	-7.12	34.35	4.16	28.37	0.00	Peak	109	3 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	52.68	54.00	-1.32	20.38	4.09	28.21	0.00	Average	122	354	VERTICAL
2	2390.00	65.00	74.00	-9.00	32.70	4.09	28.21	0.00	Peak	122	354	VERTICAL
3	2410.55	102.45			70.10	4.11	28.24	0.00	Average	122	354	VERTICAL
4	2411.13	112.48			80.13	4.11	28.24	0.00	Peak	122	354	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2383.92	62.21	74.00	-11.79	29.95	4.08	28.18	0.00	Peak	102	115	VERTICAL
2	2390.00	49.43	54.00	-4.57	17.13	4.09	28.21	0.00	Average	102	115	VERTICAL
3	2443.95	111.87			79.43	4.13	28.31	0.00	Average	102	115	VERTICAL
4	2444.24	123.59			91.15	4.13	28.31	0.00	Peak	102	115	VERTICAL
5	2483.79	52.65	54.00	-1.35	20.12	4.16	28.37	0.00	Average	102	115	VERTICAL
6	2483.89	66.41	74.00	-7.59	33.88	4.16	28.37	0.00	Peak	102	115	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2462.29	102.95			70.47	4.14	28.34	0.00	Average	108	5	VERTICAL
2	2463.45	114.40			81.92	4.14	28.34	0.00	Peak	108	5	VERTICAL
3	2483.50	52.82	54.00	-1.18	20.29	4.16	28.37	0.00	Average	108	5	VERTICAL
4	2483.50	66.54	74.00	-7.46	34.01	4.16	28.37	0.00	Peak	108	5	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 21, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	2388.71	52.81	54.00	-1.19	20.51	4.09	28.21	0.00	135	26	VERTICAL
2	2389.00	64.60	74.00	-9.40	32.30	4.09	28.21	0.00	135	26	VERTICAL
3	2428.95	99.83			67.43	4.12	28.28	0.00	135	26	VERTICAL
4	2429.53	109.46			77.06	4.12	28.28	0.00	135	26	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	2390.00	52.66	54.00	-1.34	20.36	4.09	28.21	0.00	117	26	VERTICAL
2	2390.00	65.11	74.00	-8.89	32.81	4.09	28.21	0.00	117	26	VERTICAL
3	2438.45	100.56			68.12	4.13	28.31	0.00	117	26	VERTICAL
4	2438.45	110.57			78.13	4.13	28.31	0.00	117	26	VERTICAL
5	2484.18	63.92	74.00	-10.08	31.39	4.16	28.37	0.00	117	26	VERTICAL
6	2484.95	49.73	54.00	-4.27	17.20	4.16	28.37	0.00	117	26	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	Pol/Phase
1	2444.47	110.39			77.95	4.13	28.31	0.00	107	207	VERTICAL
2	2445.05	100.33			67.89	4.13	28.31	0.00	107	207	VERTICAL
3	2484.42	52.14	54.00	-1.86	19.61	4.16	28.37	0.00	107	207	VERTICAL
4	2485.00	64.99	74.00	-9.01	32.46	4.16	28.37	0.00	107	207	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 15, 2015 ~ Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2383.34	61.76	74.00	-12.24	29.50	4.08	28.18	0.00	Peak	100	49 HORIZONTAL
2	2387.40	49.82	54.00	-4.18	17.52	4.09	28.21	0.00	Average	100	49 HORIZONTAL
3	2410.26	115.92			83.57	4.11	28.24	0.00	Average	100	49 HORIZONTAL
4	2410.55	118.77			86.42	4.11	28.24	0.00	Peak	100	49 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2355.85	49.77	54.00	-4.23	17.55	4.07	28.15	0.00	Average	113	54 HORIZONTAL
2	2388.84	62.05	74.00	-11.95	29.75	4.09	28.21	0.00	Peak	113	54 HORIZONTAL
3	2436.13	115.86			83.46	4.12	28.28	0.00	Average	113	54 HORIZONTAL
4	2436.13	115.86			83.46	4.12	28.28	0.00	Peak	113	54 HORIZONTAL
5	2499.71	62.02	74.00	-11.98	29.45	4.17	28.40	0.00	Peak	113	54 HORIZONTAL
6	2500.00	47.86	54.00	-6.14	15.29	4.17	28.40	0.00	Average	113	54 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2461.13	114.87			82.39	4.14	28.34	0.00	Average	121	44 HORIZONTAL
2	2461.42	117.71			85.23	4.14	28.34	0.00	Peak	121	44 HORIZONTAL
3	2487.84	49.58	54.00	-4.42	17.01	4.17	28.40	0.00	Average	121	44 HORIZONTAL
4	2487.84	61.77	74.00	-12.23	29.20	4.17	28.40	0.00	Peak	121	44 HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	52.45	54.00	-1.55	20.15	4.09	28.21	0.00	120	50	HORIZONTAL
2	2390.00	55.09	74.00	-18.91	22.79	4.09	28.21	0.00	120	50	HORIZONTAL
3	2404.47	109.09			76.74	4.11	28.24	0.00	120	50	HORIZONTAL
4	2404.76	105.26			72.91	4.11	28.24	0.00	120	50	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	50.61	54.00	-3.39	18.31	4.09	28.21	0.00	125	336	HORIZONTAL
2	2390.00	64.04	74.00	-9.96	31.74	4.09	28.21	0.00	125	336	HORIZONTAL
3	2438.16	110.97			78.53	4.13	28.31	0.00	125	336	HORIZONTAL
4	2439.03	120.86			88.42	4.13	28.31	0.00	125	336	HORIZONTAL
5	2483.50	60.52	74.00	-13.48	27.99	4.16	28.37	0.00	125	336	HORIZONTAL
6	2500.00	48.58	54.00	-5.42	16.01	4.17	28.40	0.00	125	336	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2462.87	112.23			79.75	4.14	28.34	0.00	125	313	HORIZONTAL
2	2463.01	102.57			70.09	4.14	28.34	0.00	125	313	HORIZONTAL
3	2483.50	52.67	54.00	-1.33	20.14	4.16	28.37	0.00	125	313	HORIZONTAL
4	2483.50	66.19	74.00	-7.81	33.66	4.16	28.37	0.00	125	313	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	52.56	54.00	-1.44	20.26	4.09	28.21	0.00	119	55	HORIZONTAL
2	2390.00	67.13	74.00	-6.87	34.83	4.09	28.21	0.00	119	55	HORIZONTAL
3	2408.38	115.04			82.69	4.11	28.24	0.00	119	55	HORIZONTAL
4	2409.25	103.60			71.25	4.11	28.24	0.00	119	55	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	49.89	54.00	-4.11	17.59	4.09	28.21	0.00	250	45	VERTICAL
2	2390.00	62.34	74.00	-11.66	30.04	4.09	28.21	0.00	250	45	VERTICAL
3	2441.05	111.97			79.53	4.13	28.31	0.00	250	45	VERTICAL
4	2441.05	122.90			90.46	4.13	28.31	0.00	250	45	VERTICAL
5	2483.50	52.04	54.00	-1.96	19.51	4.16	28.37	0.00	250	45	VERTICAL
6	2483.50	66.12	74.00	-7.88	33.59	4.16	28.37	0.00	250	45	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2463.45	101.47			68.99	4.14	28.34	0.00	258	0	VERTICAL
2	2463.74	114.05			81.57	4.14	28.34	0.00	258	0	VERTICAL
3	2483.50	52.69	54.00	-1.31	20.16	4.16	28.37	0.00	258	0	VERTICAL
4	2483.50	65.90	74.00	-8.10	33.37	4.16	28.37	0.00	258	0	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 16, 2015		
Test Mode	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2386.82	52.67	54.00	-1.33	20.37	4.09	28.21	0.00	152	42	HORIZONTAL
2	2387.11	64.68	74.00	-9.32	32.38	4.09	28.21	0.00	152	42	HORIZONTAL
3	2426.34	99.41			67.01	4.12	28.28	0.00	152	42	HORIZONTAL
4	2426.92	109.39			76.99	4.12	28.28	0.00	152	42	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	50.42	54.00	-3.58	18.12	4.09	28.21	0.00	272	15	VERTICAL
2	2390.00	62.63	74.00	-11.37	30.33	4.09	28.21	0.00	272	15	VERTICAL
3	2443.66	102.17			69.73	4.13	28.31	0.00	272	15	VERTICAL
4	2444.53	111.77			79.33	4.13	28.31	0.00	272	15	VERTICAL
5	2483.50	52.77	54.00	-1.23	20.24	4.16	28.37	0.00	272	15	VERTICAL
6	2483.50	65.40	74.00	-8.60	32.87	4.16	28.37	0.00	272	15	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2444.19	98.42			65.98	4.13	28.31	0.00	123	306	HORIZONTAL
2	2463.29	108.32			75.84	4.14	28.34	0.00	123	306	HORIZONTAL
3	2483.50	52.85	54.00	-1.15	20.32	4.16	28.37	0.00	123	306	HORIZONTAL
4	2483.50	64.85	74.00	-9.15	32.32	4.16	28.37	0.00	123	306	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.66 dBi

Plot on Configuration IEEE 802.11b / Reference Level

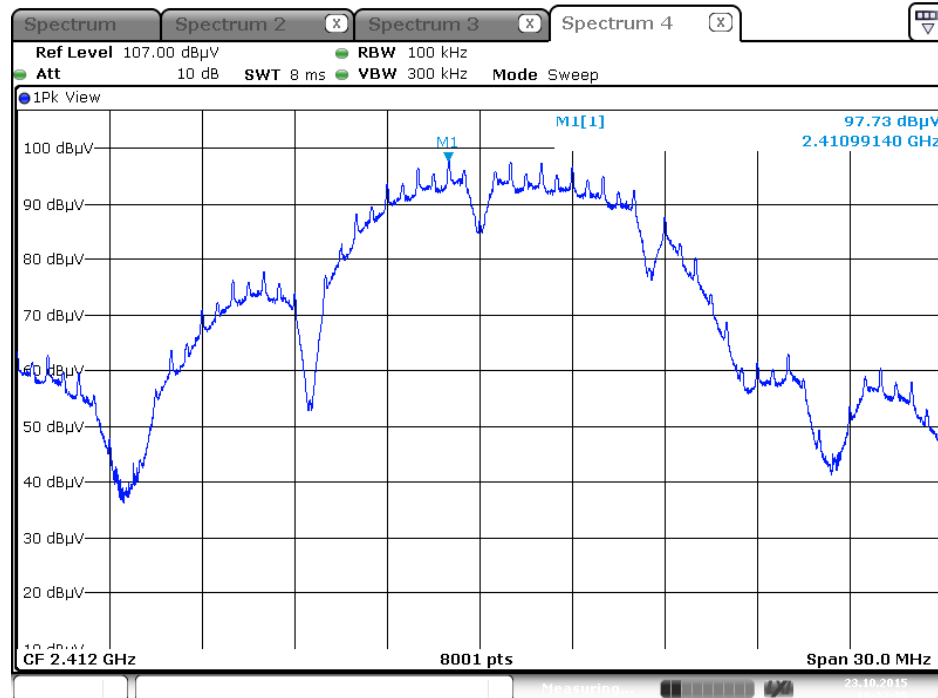


Date: 23.0 CT.2015 19:32:35

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

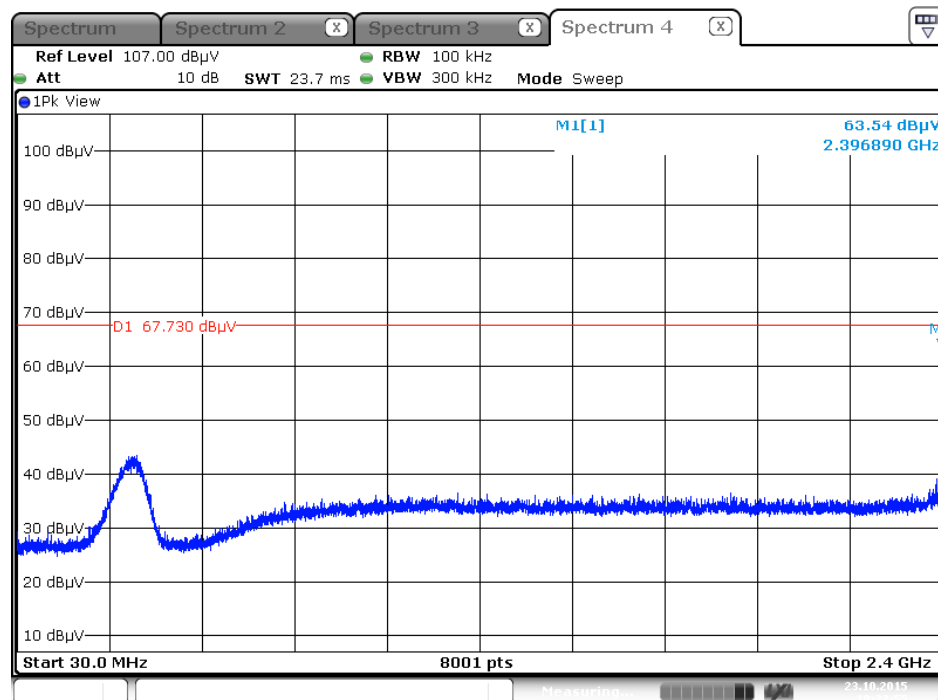


Date: 23.0 CT.2015 19:33:56

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

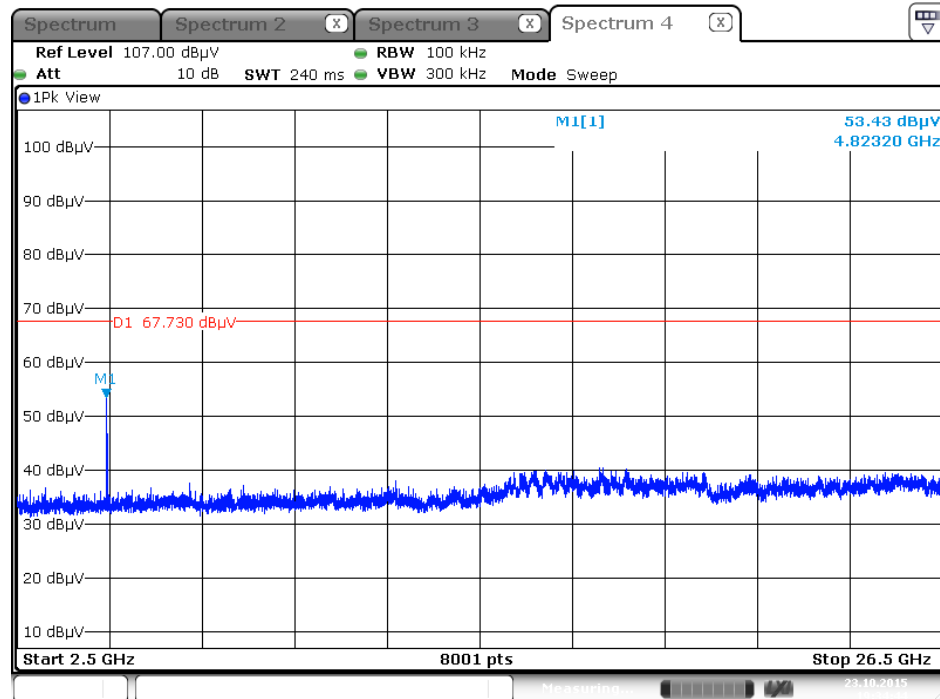


Date: 23.0 CT.2015 19:34:45

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

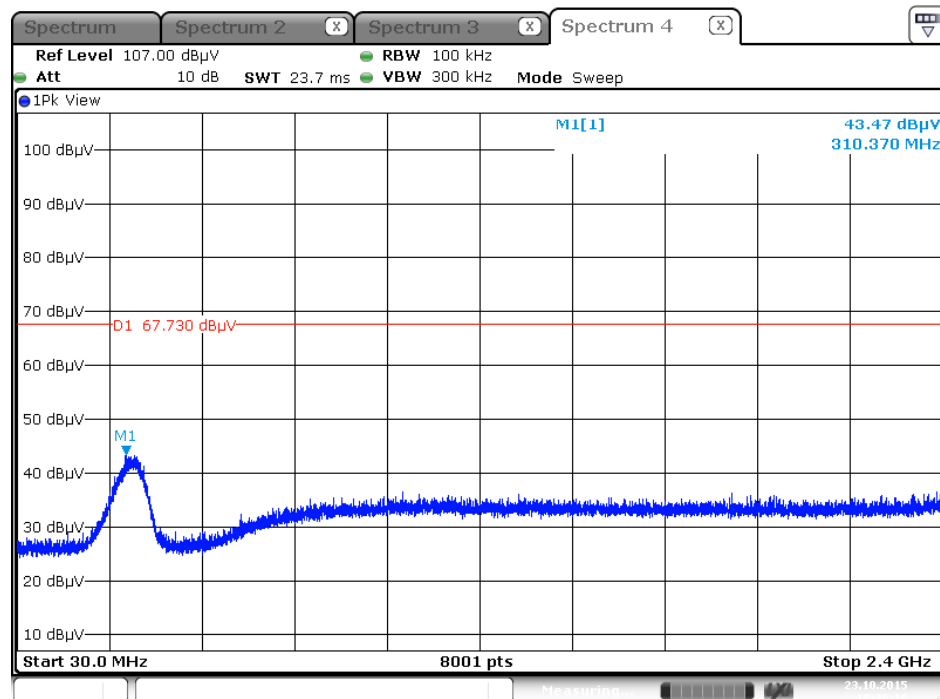


Date: 23.0 CT.2015 19:36:19

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

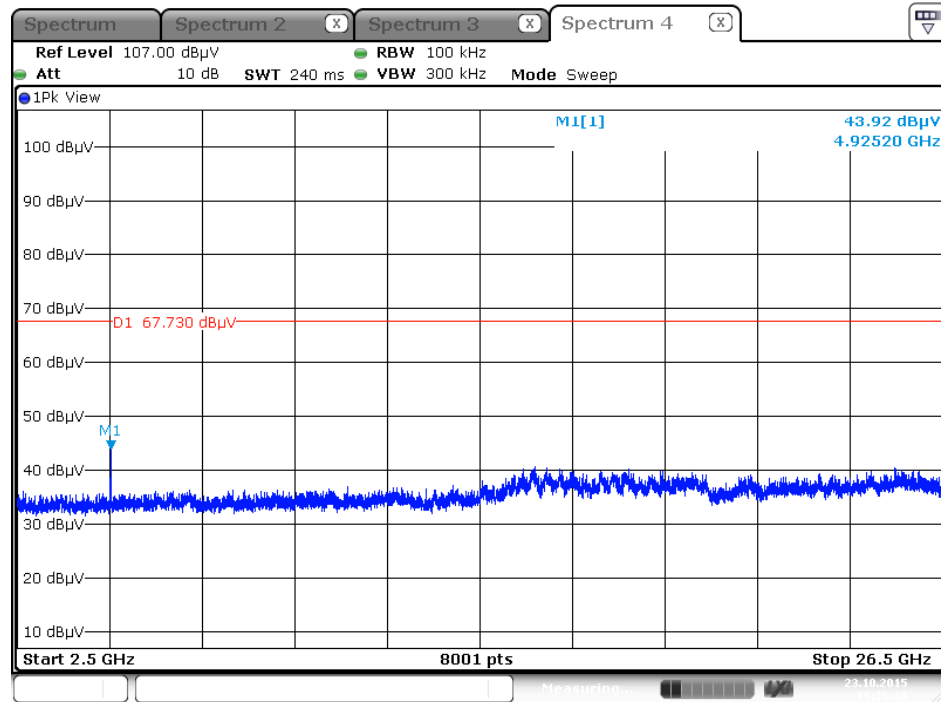


Date: 23.0 CT.2015 19:35:38


Plot on Configuration IEEE 802.11g / Reference Level

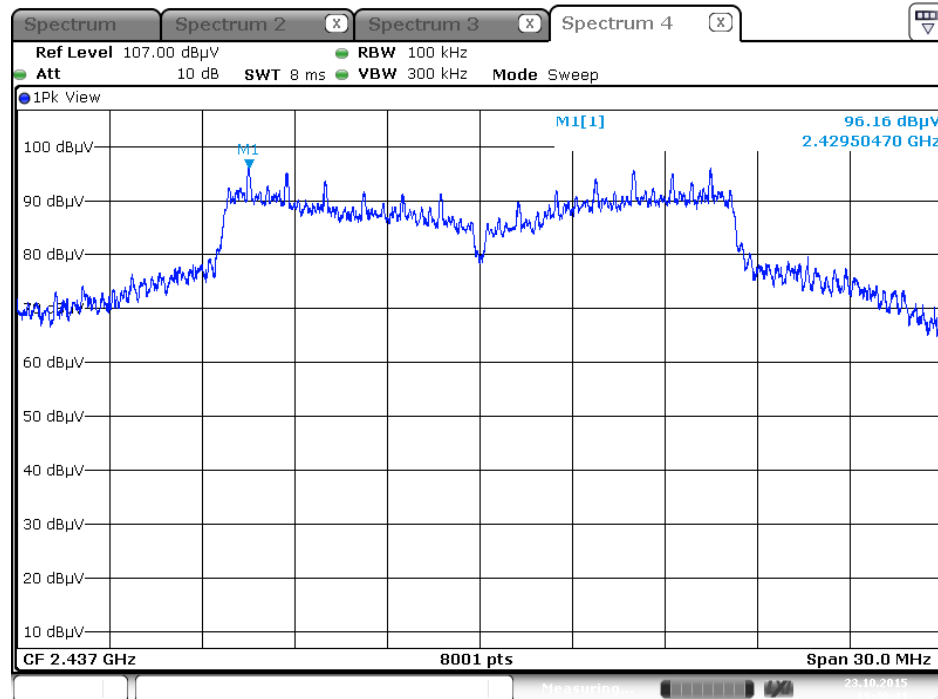

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

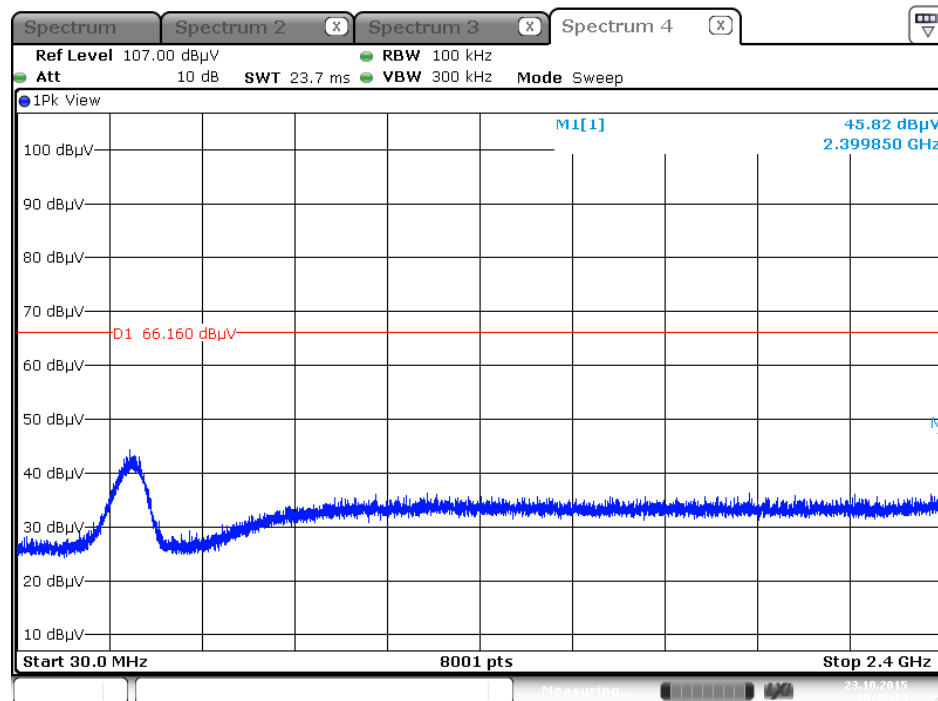


Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

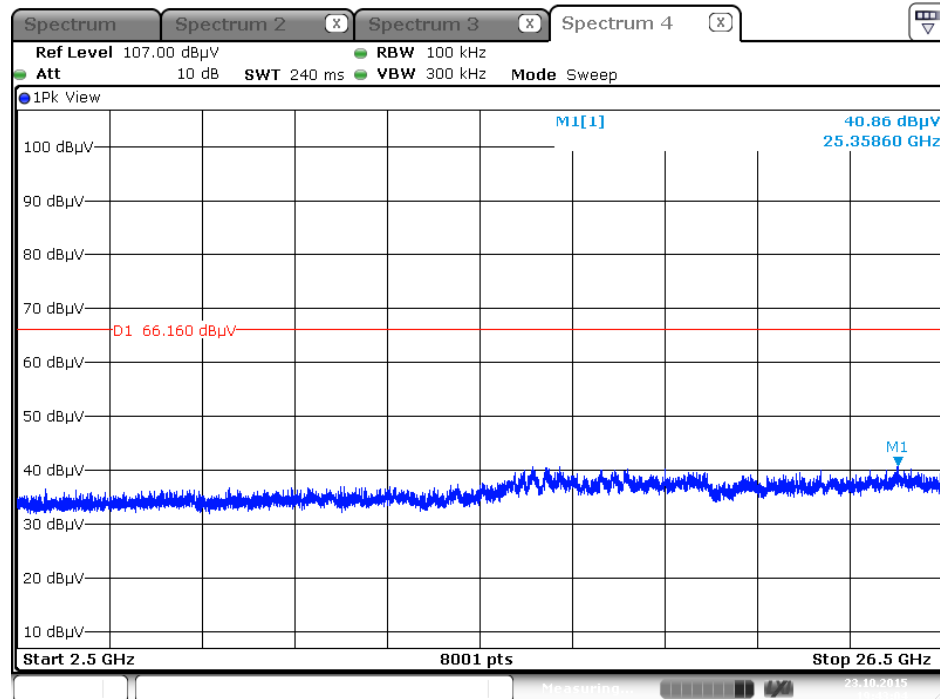


Date: 23.0 CT.2015 19:43:04

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

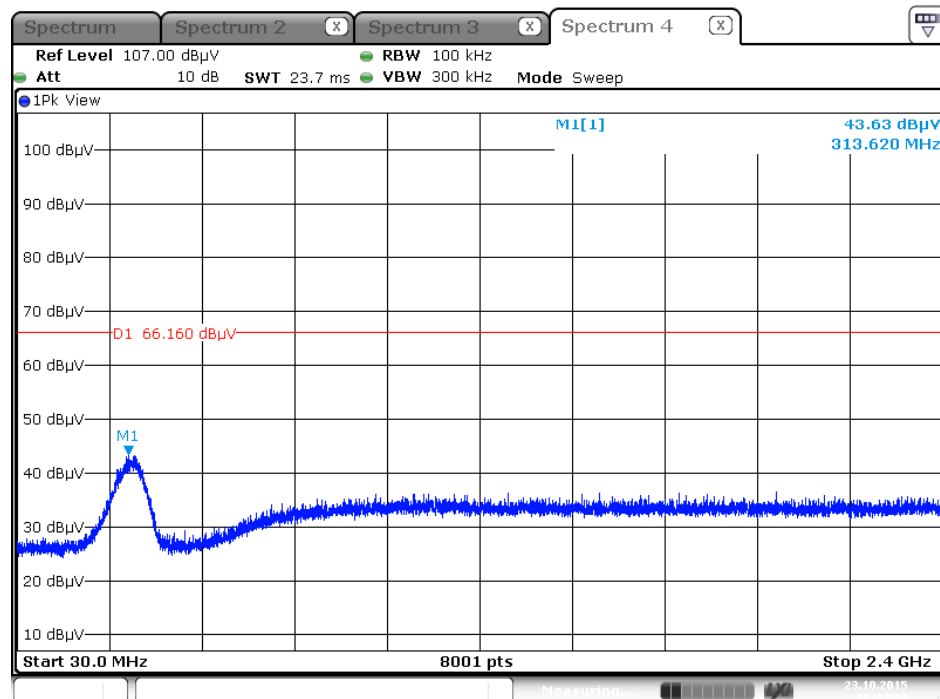


Date: 23.0 CT.2015 19:44:40

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

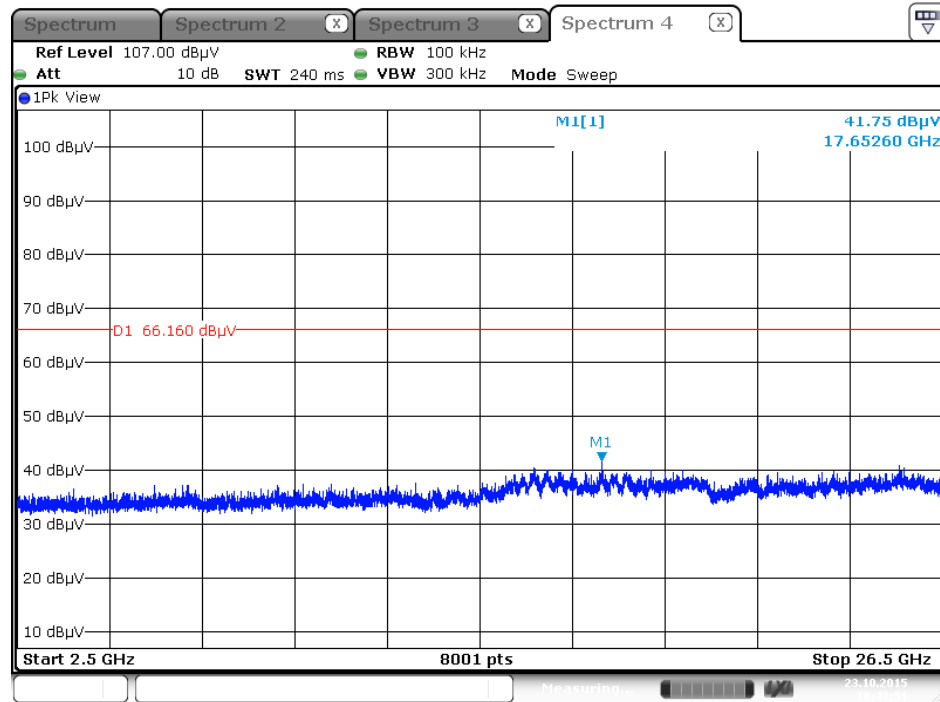


Date: 23.0 CT 2015 19:43:51


Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

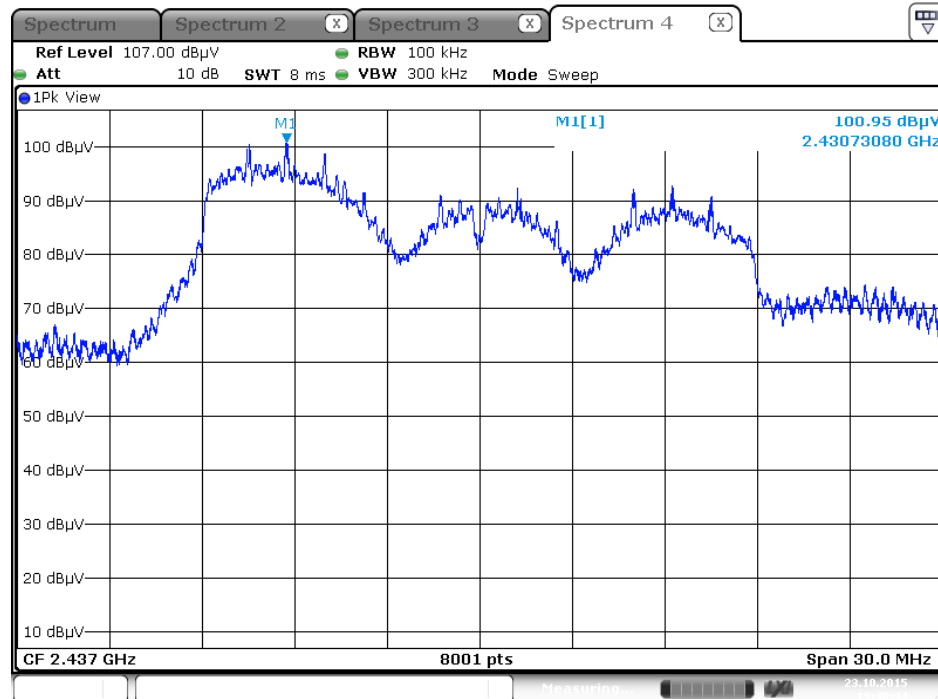

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

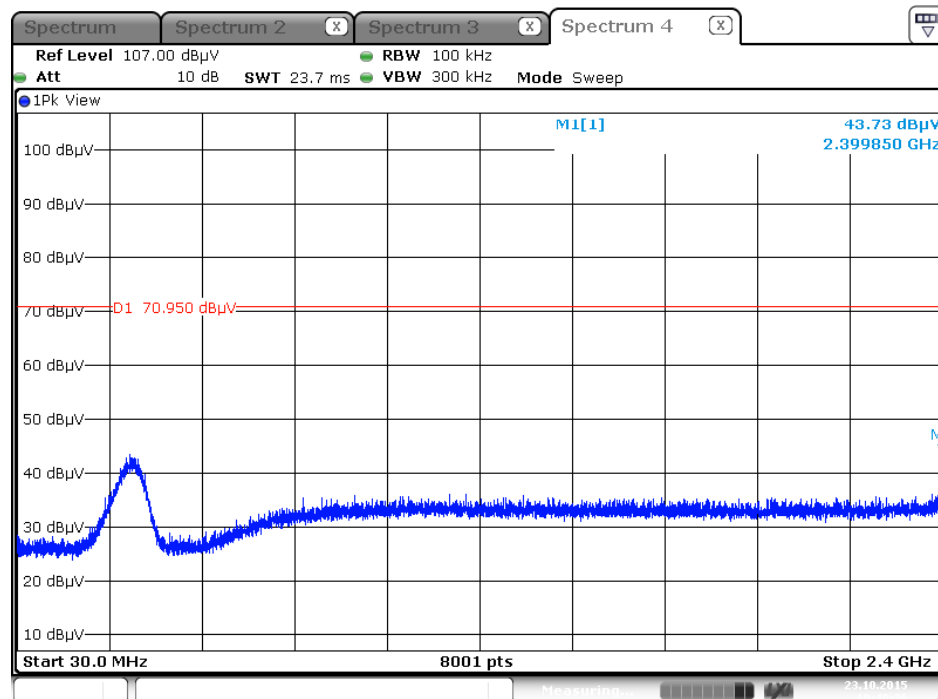


Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

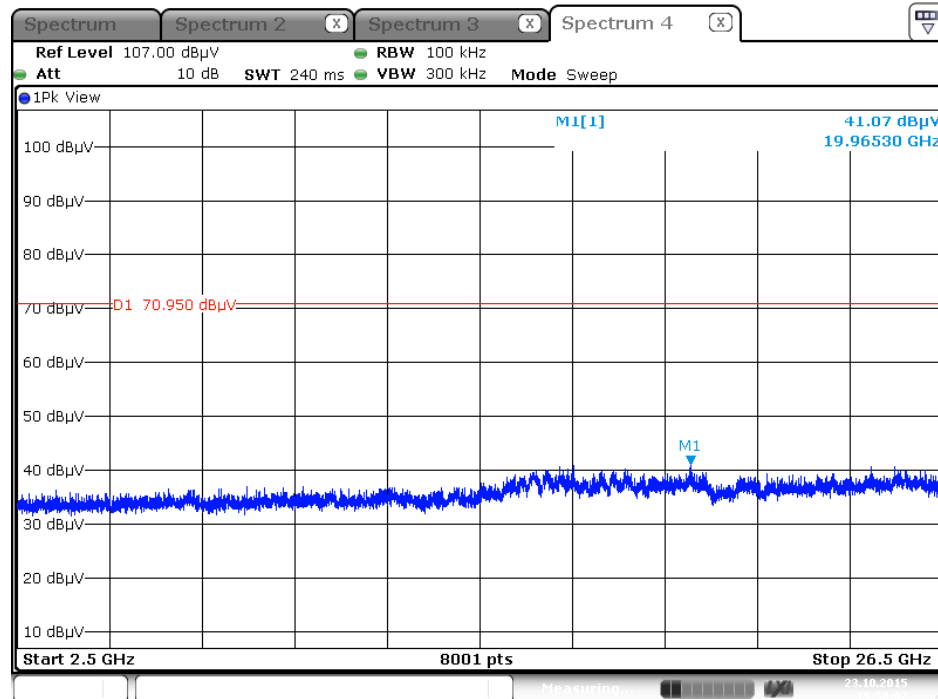


Date: 23.0 CT.2015 19:50:01

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

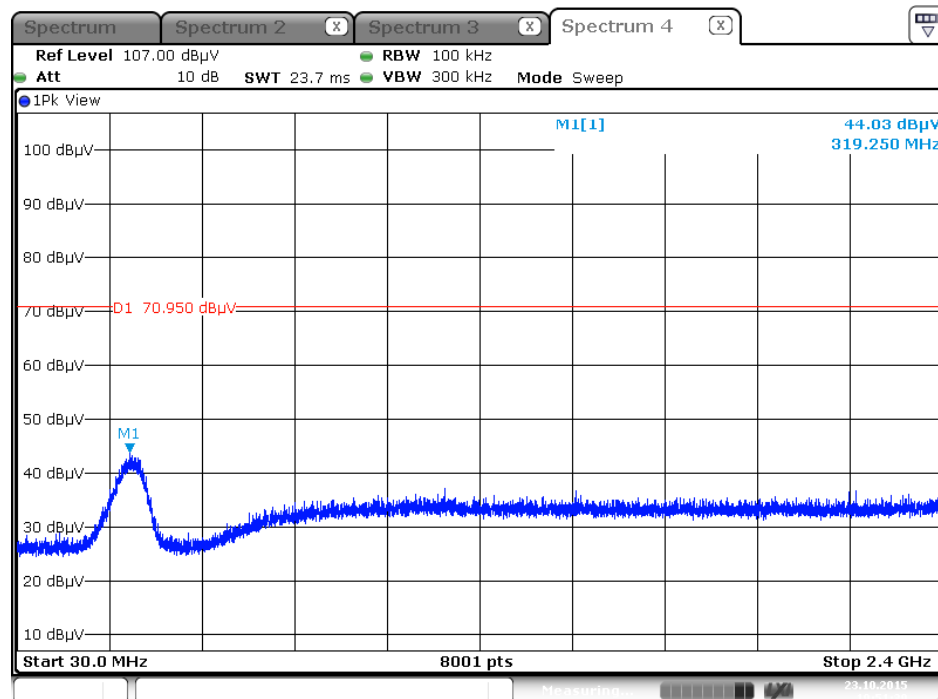


Date: 23.0 CT.2015 19:51:39

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

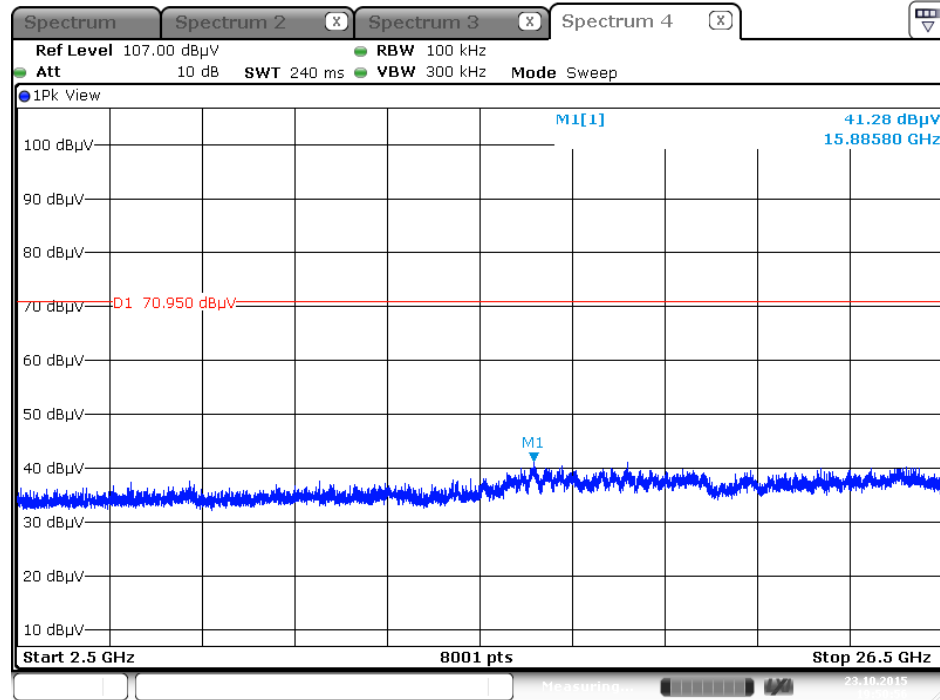


Date: 23.0 CT.2015 19:50:57


Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

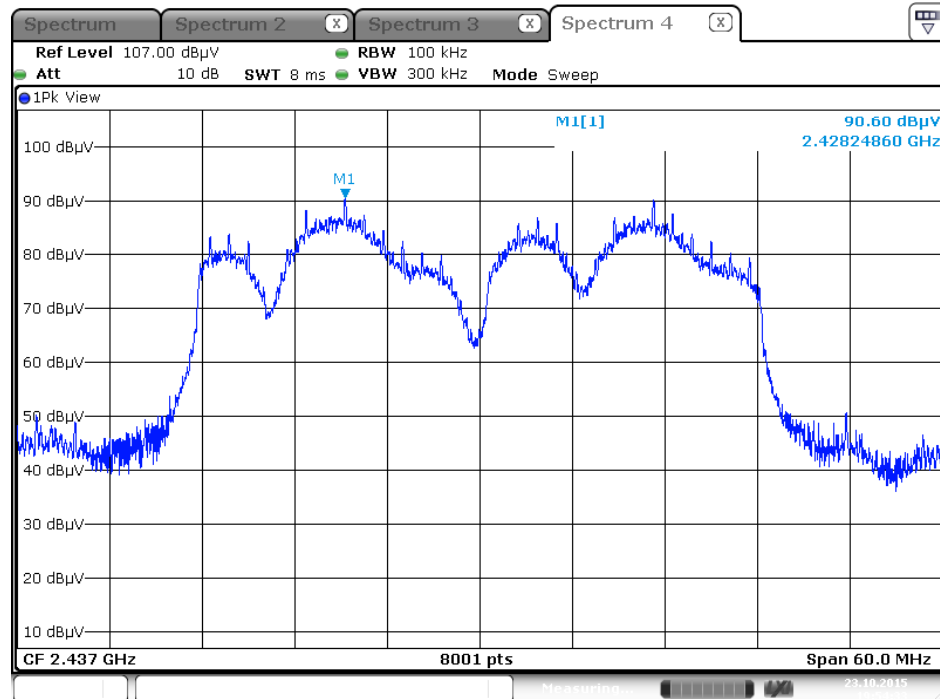

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

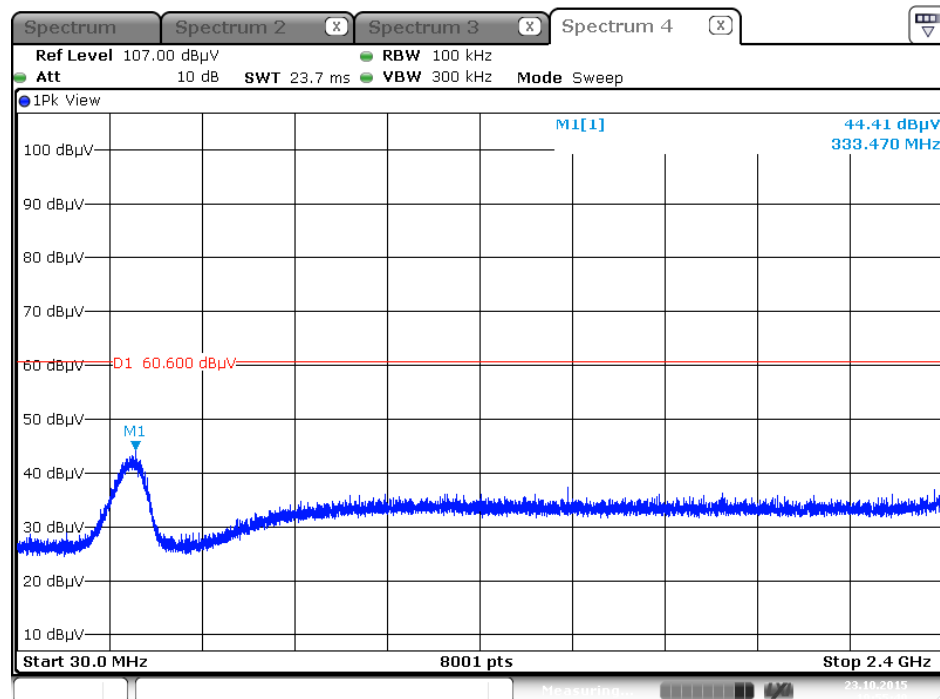


Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

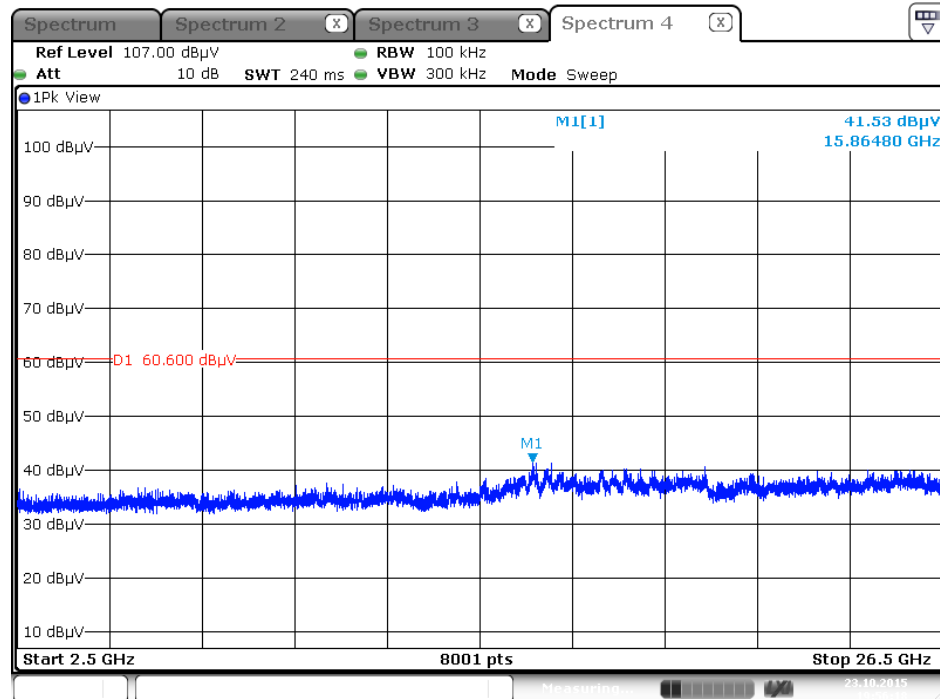


Date: 23.0 CT.2015 19:56:18

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

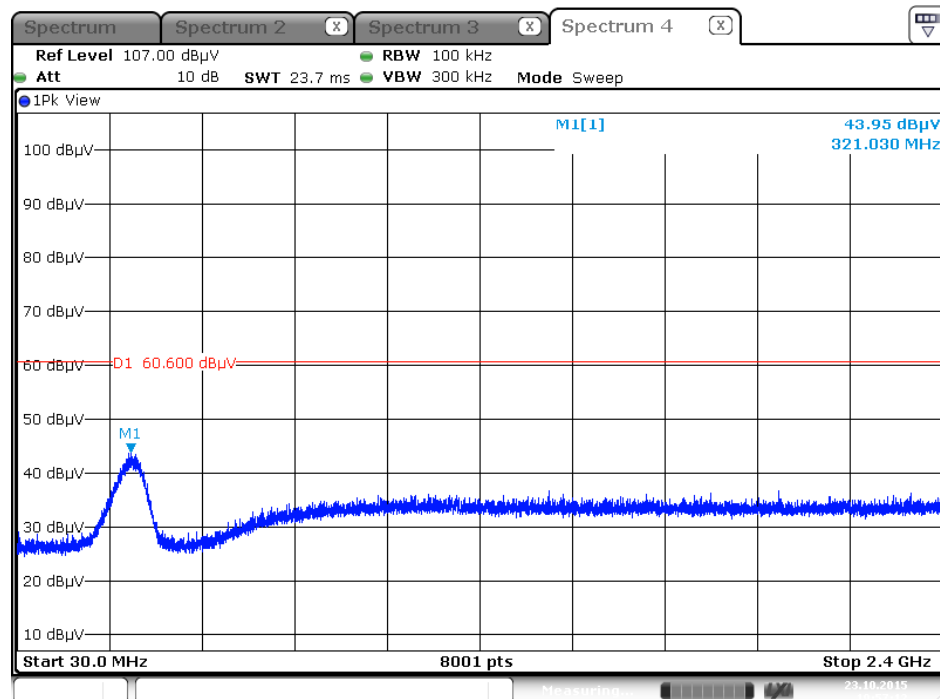

Date: 23.0 CT.2015 19:57:12

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

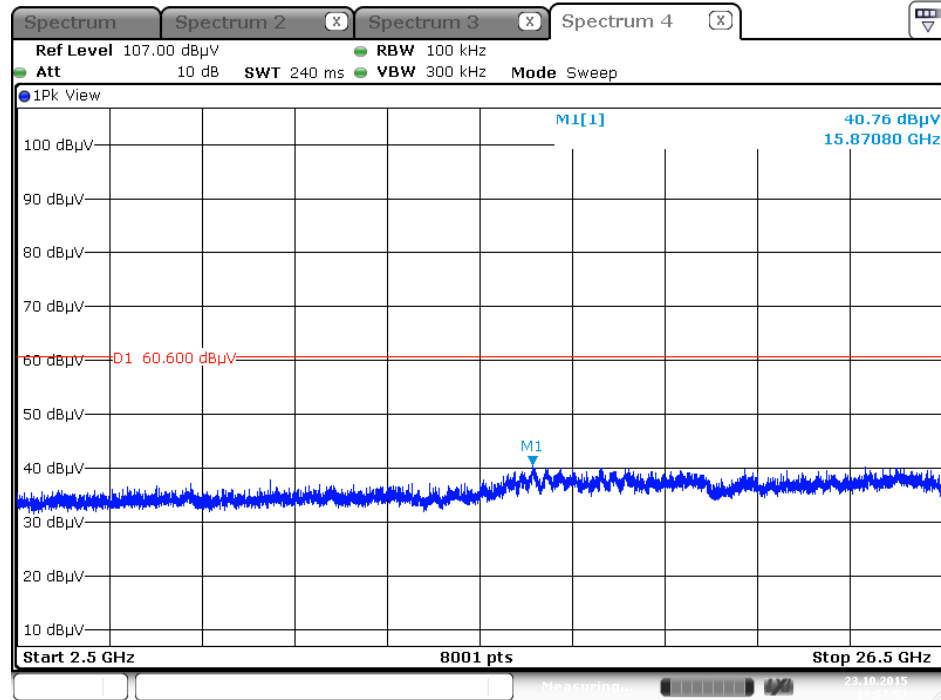

Date: 23.0 CT.2015 19:57:53


Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:3.81 dBi, Chain2:3.75 dBi, Chain3:3.98 dBi, Chain4:3.47 dBi

Plot on Configuration IEEE 802.11b / Reference Level




Date: 16.0 CT.2015 02:56:30

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

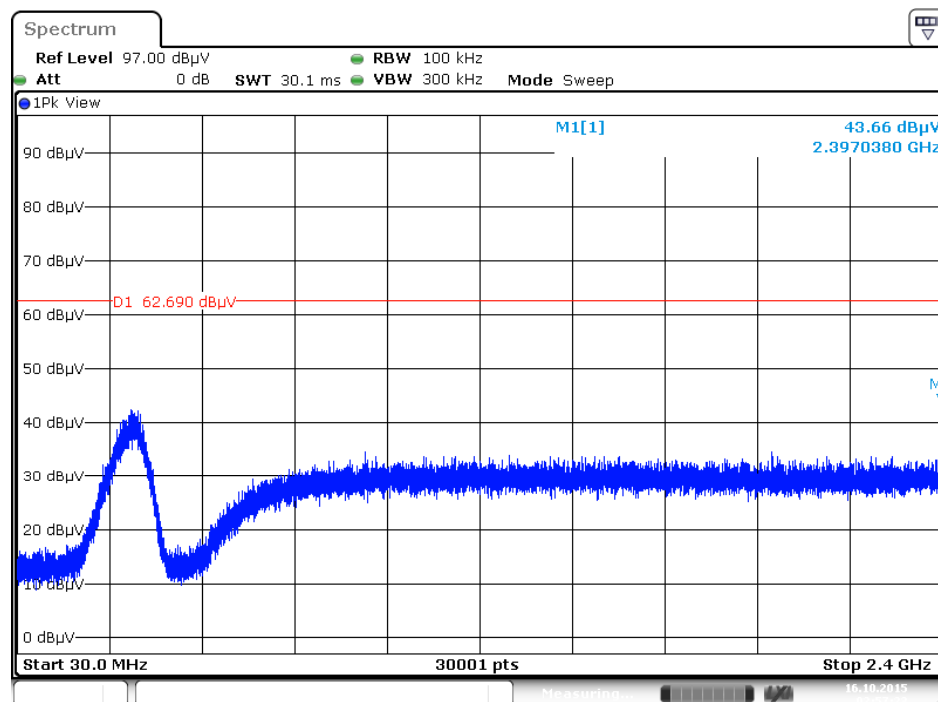


Date: 16.0 CT.2015 02:57:23

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

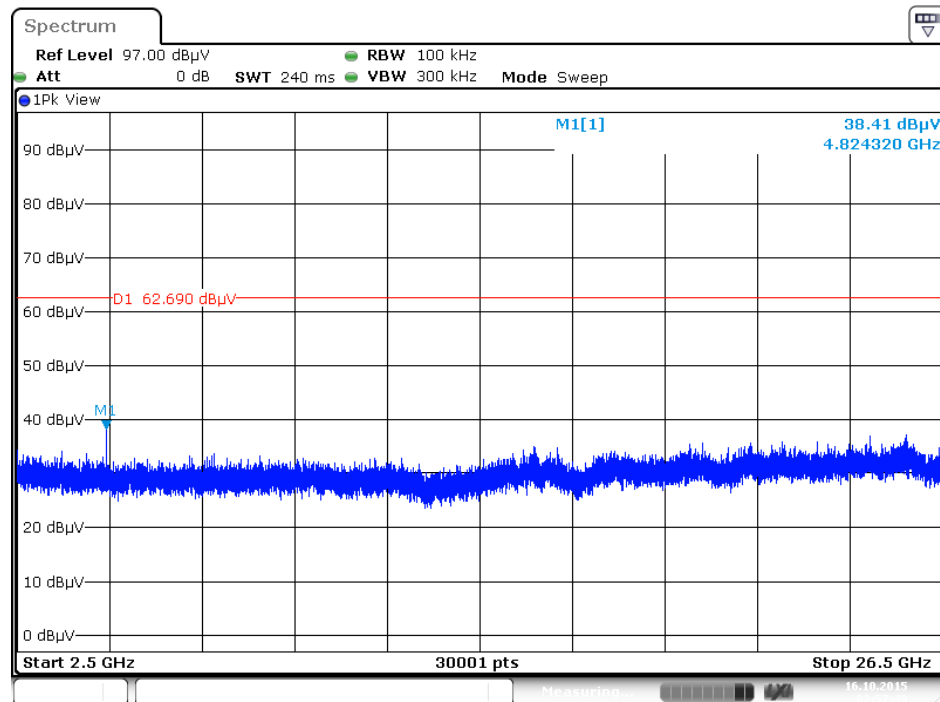


Date: 16.0 CT.2015 02:57:49

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

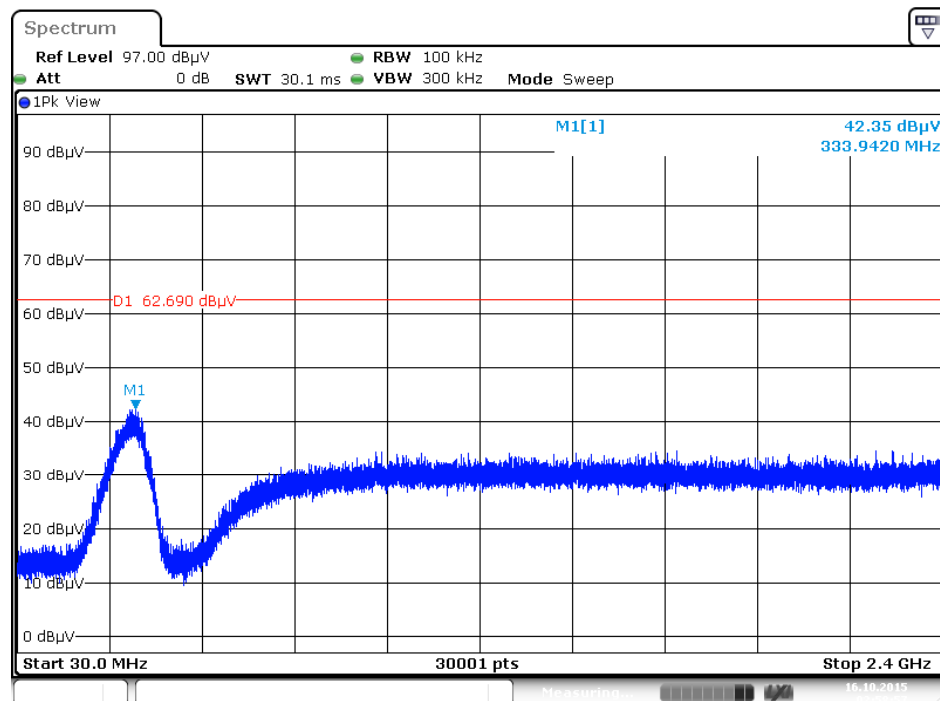


Date: 16.0 CT.2015 02:58:57

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

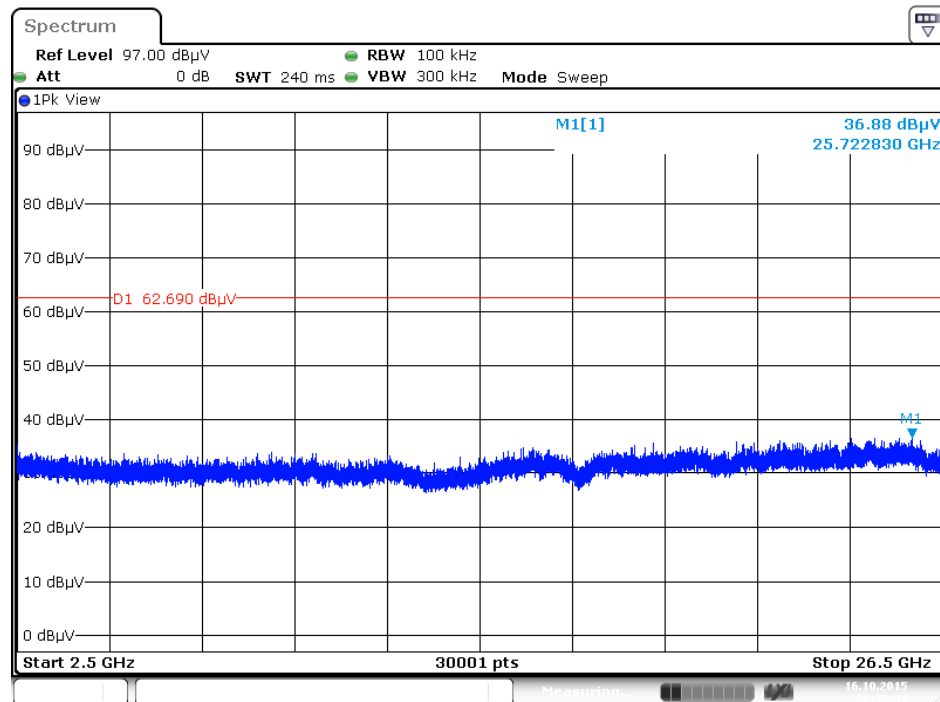


Date: 16.0 CT.2015 02:58:34

Plot on Configuration IEEE 802.11g / Reference Level

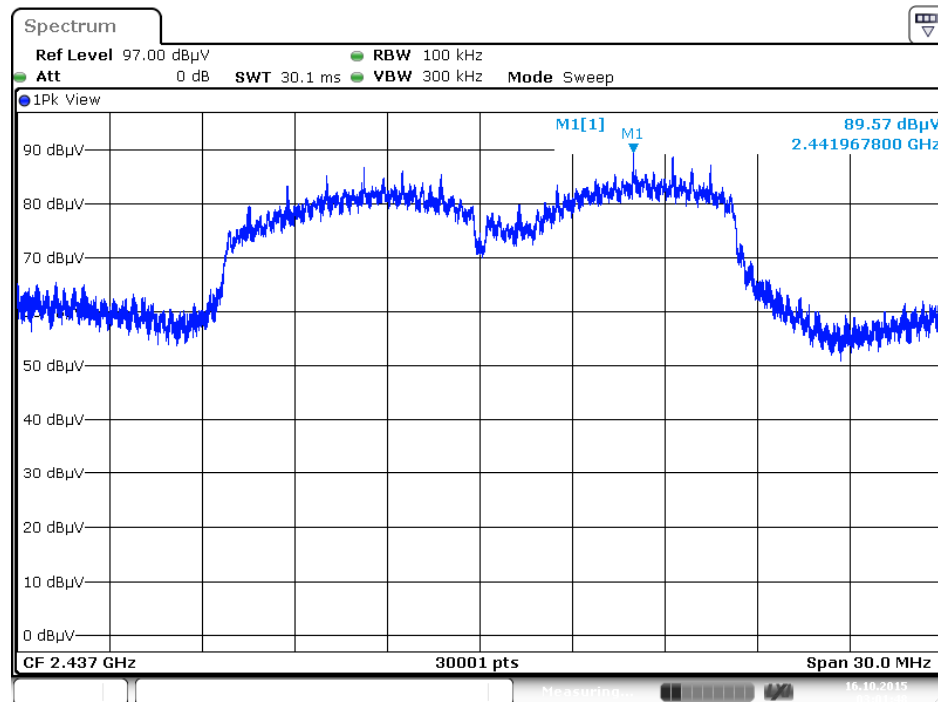


Date: 16.0 CT.2015 03:01:48

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

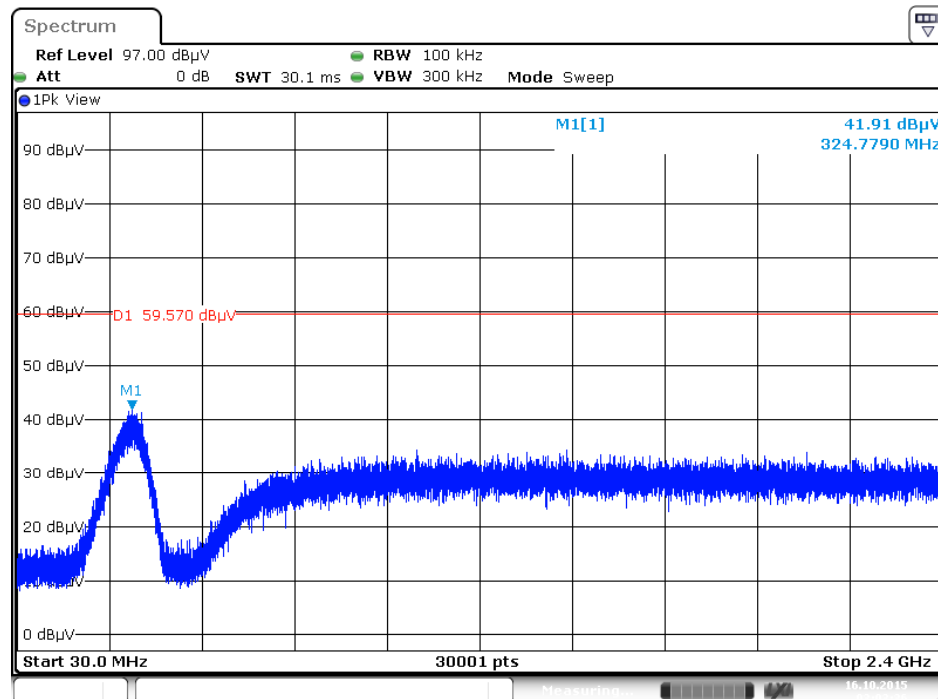


Date: 16.0 CT.2015 03:03:36

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

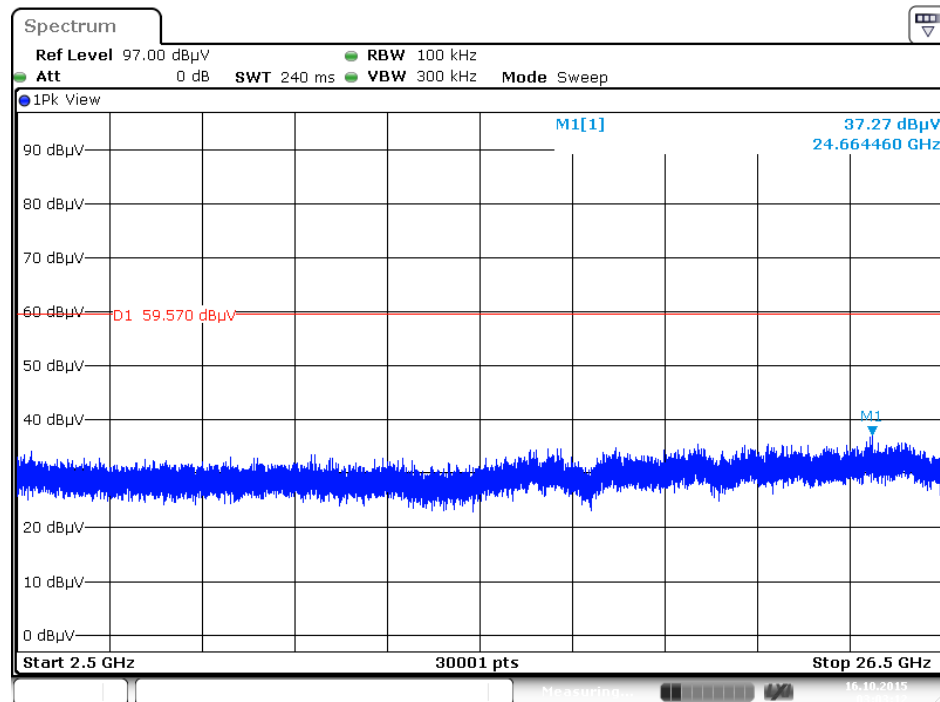


Date: 16.0 CT.2015 03:03:12

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

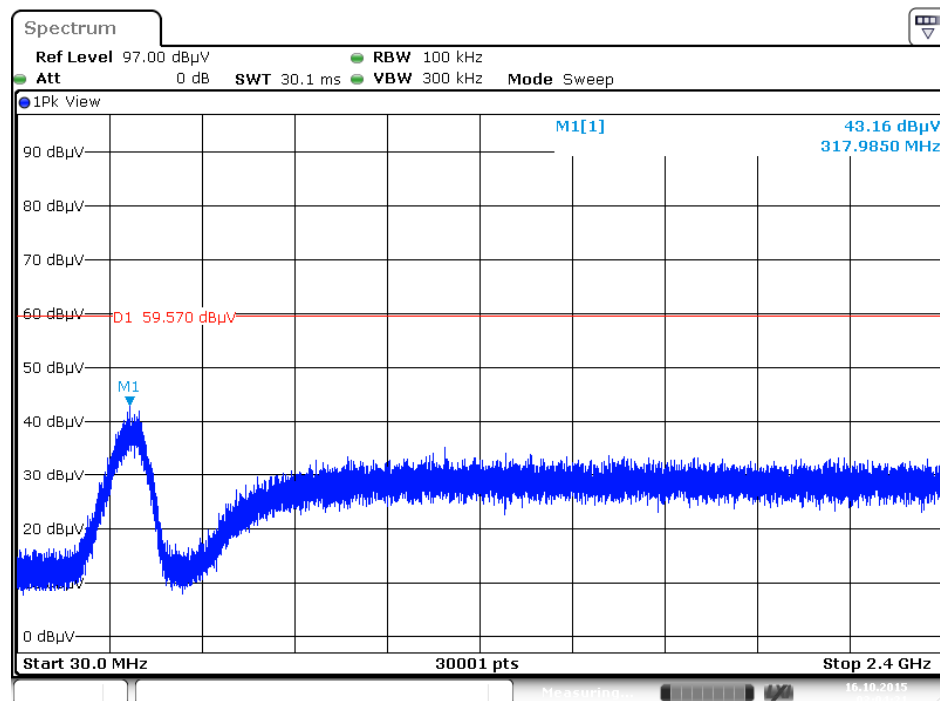


Date: 16.0 CT.2015 03:04:21

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

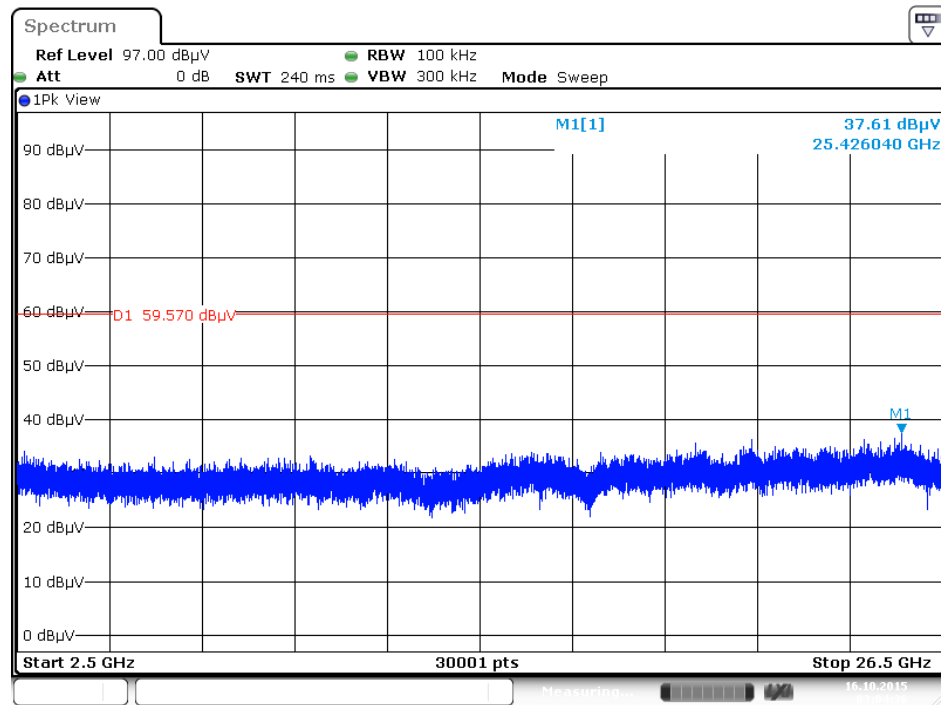


Date: 16.0 CT.2015 03:04:36

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

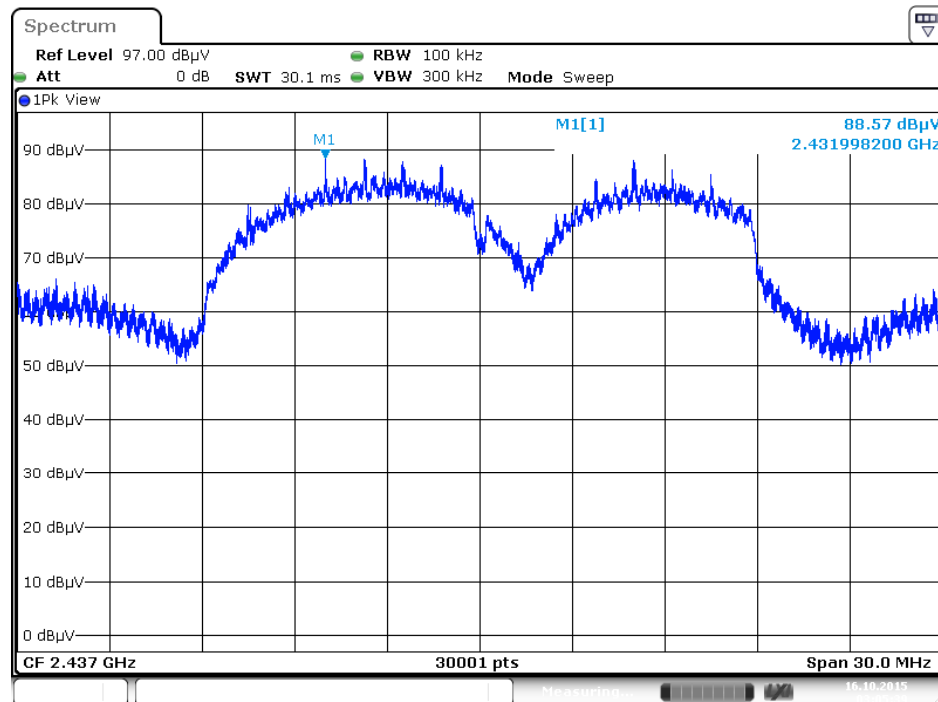


Date: 16.0 CT.2015 03:05:39

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

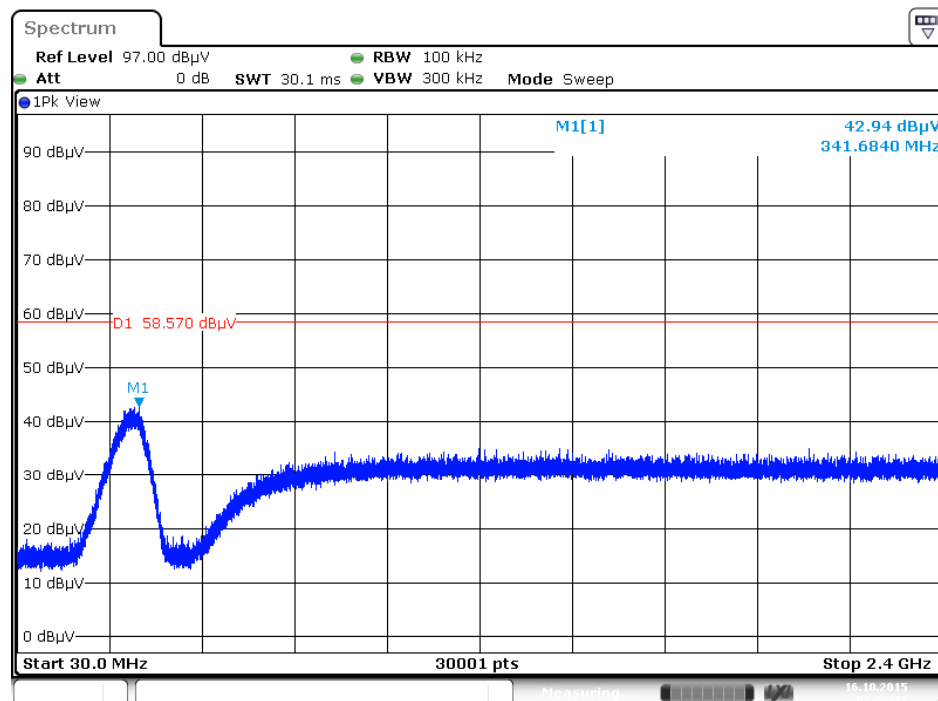


Date: 16.0 CT.2015 03:06:23

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

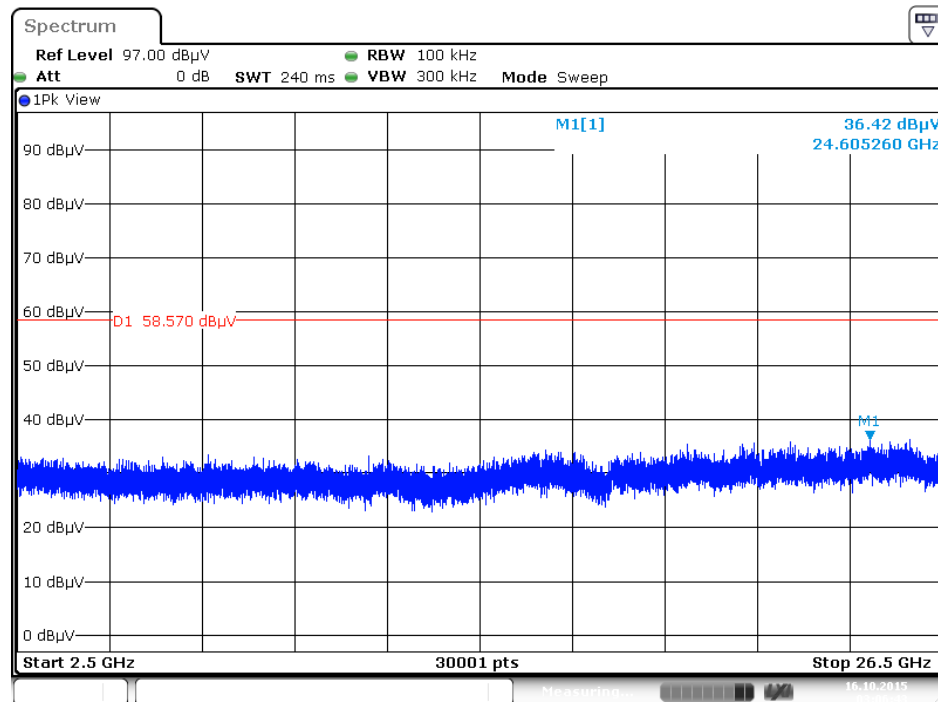


Date: 16.0 CT.2015 03:06:43

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

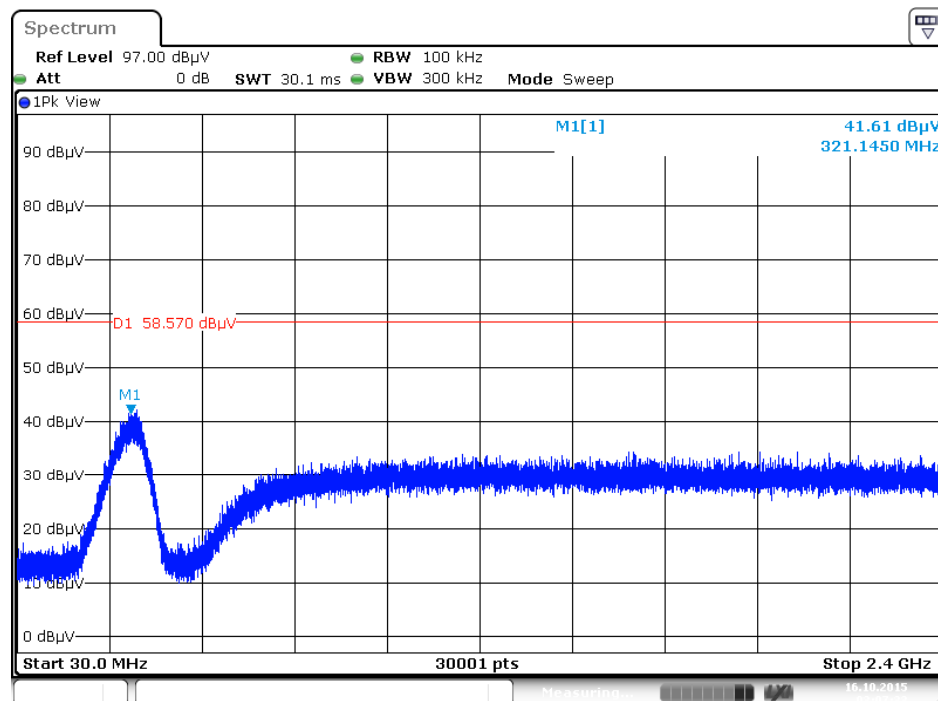


Date: 16.0 CT.2015 03:07:33

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

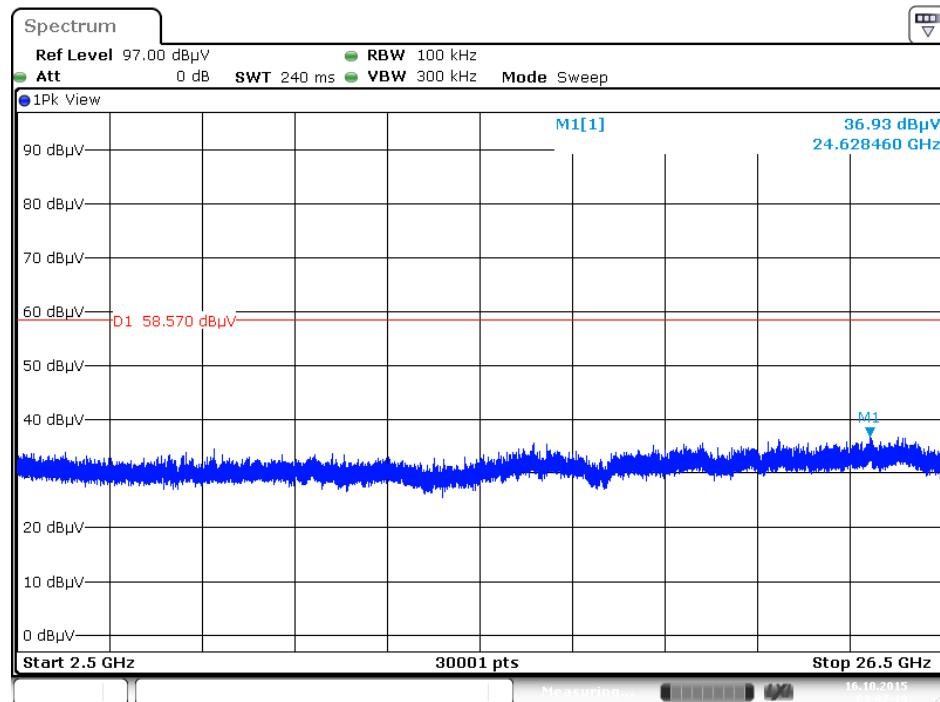


Date: 16.10.2015 03:07:20

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

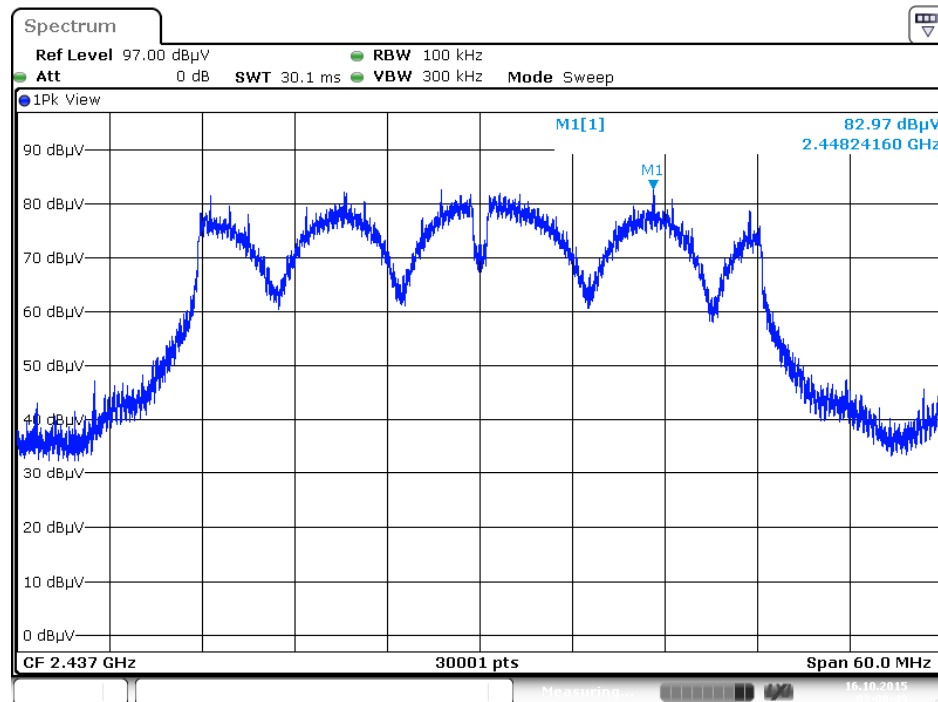


Date: 16.0 CT.2015 03:08:49

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

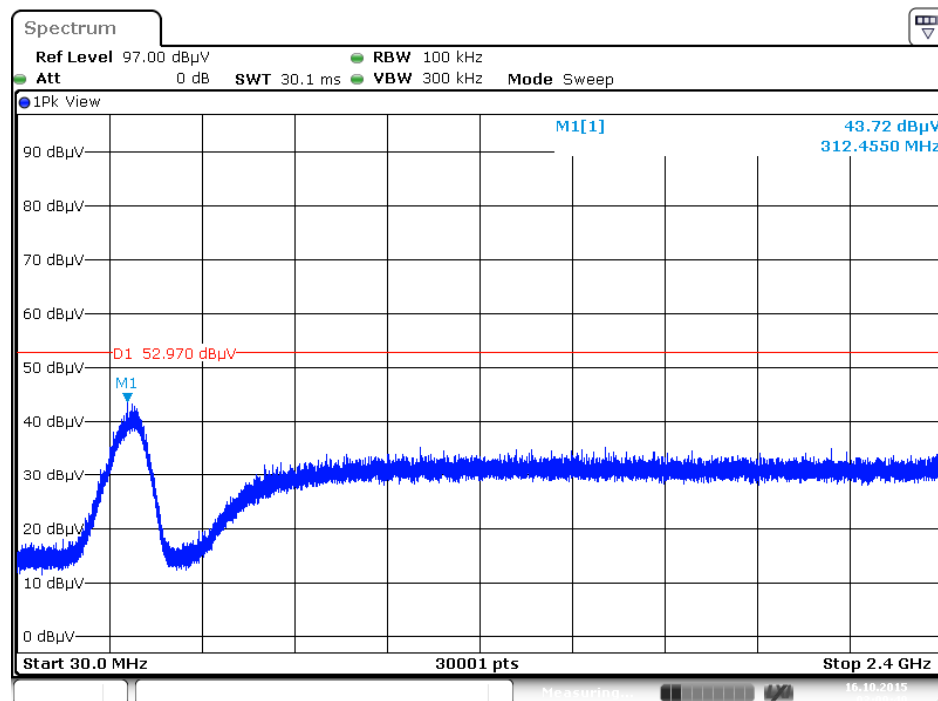


Date: 16.0 CT.2015 03:09:40

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

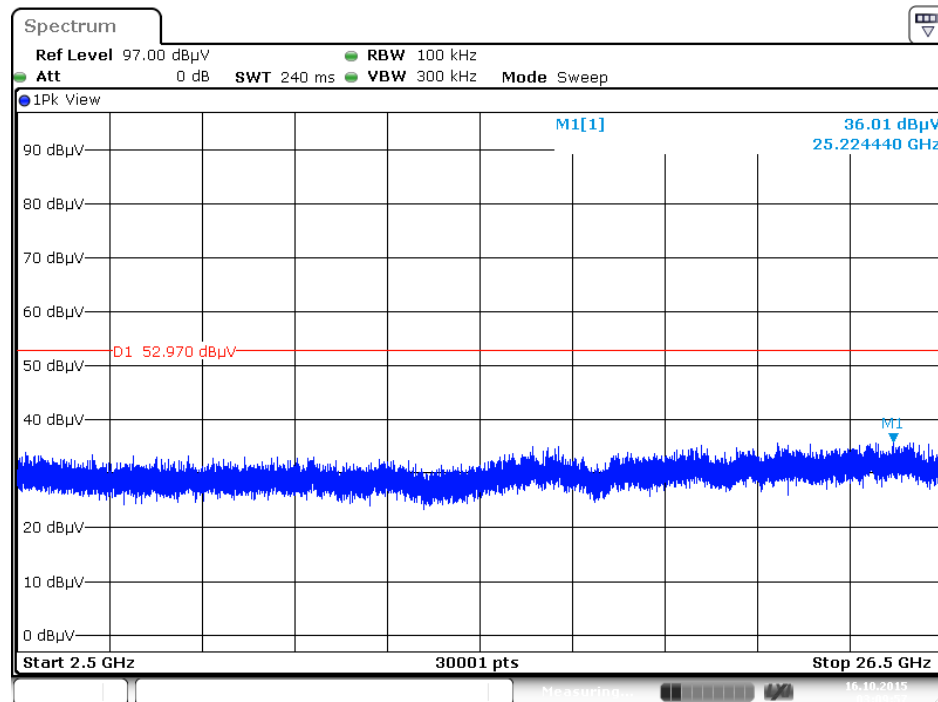


Date: 16.0 CT.2015 03:09:58

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

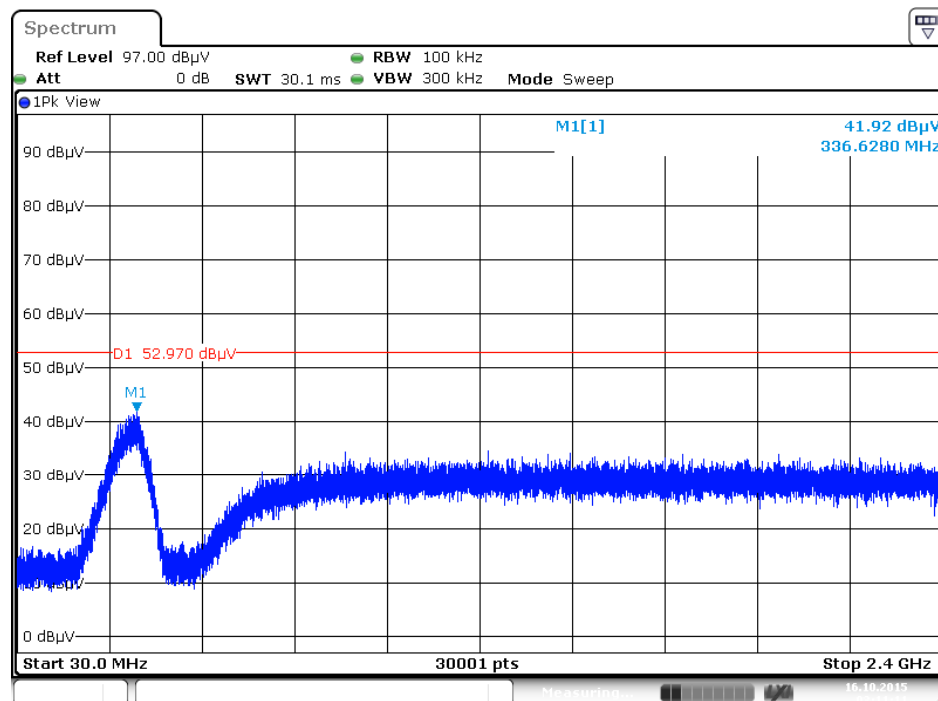

Date: 16.0 CT.2015 03:11:12

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

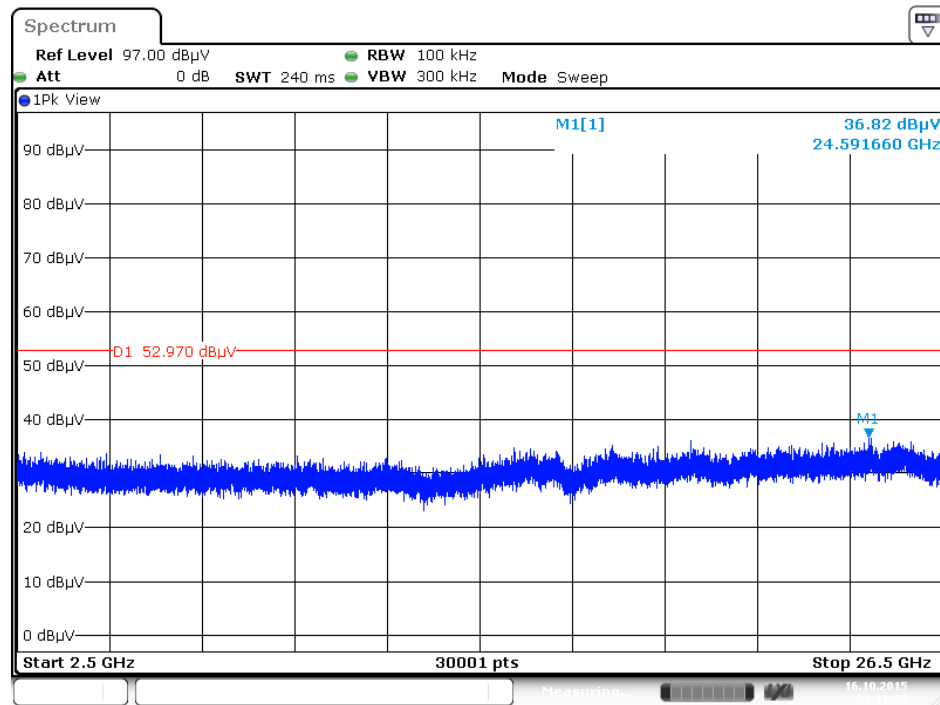

Date: 16.0 CT.2015 03:11:36

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10259	9kHz ~ 1.3GHz	Jan. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Feb.10, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%