



FCC Test Report

Equipment : 802.11n 3x3 bgn PCIE Module
Brand Name : Senao Networks
Model No. : PCE3203AH
FCC ID : U2M-PCE3203AH
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Applicant : Senao Networks, Inc.
3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan

The product sample received on Aug. 30, 2013 and completely tested on Nov. 14, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


James Fan / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Testing Applied Standards	7
1.3	Testing Location Information	7
1.4	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter	9
2.4	The Worst Case Measurement Configuration.....	10
2.5	Support Equipment.....	11
2.6	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	6dB Bandwidth	15
3.3	RF Output Power.....	17
3.4	Power Spectral Density	21
3.5	Emissions in non-restricted frequency bands	24
3.6	Transmitter Radiated Unwanted Emissions	37
4	TEST EQUIPMENT AND CALIBRATION DATA.....	66
APPENDIX A. TEST PHOTOS		A1-A7



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.156MHz 48.09 (Margin 7.60dB) – AV 56.76 (Margin 8.93dB) – QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth [MHz] 20M: 9.62 / 40M: 35.71	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Conducted (Average) Output Power)	Power [dBm]: 28.38	Power [dBm]: 30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/3kHz]: 3.07	PSD [dBm/3kHz]: 8	Complied
3.5	15.247(d)	Emissions in non-restricted frequency bands	Out-of -band emissions are 30dB below the highest power	Non-Restricted Bands: > 30 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 2483.50MHz 73.68 (Margin 0.32dB) – PK	Non-Restricted Bands: > 30 dBc Restricted Bands: FCC 15.209	Complied



Revision History



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)
2400-2483.5	b	2412-2462	1-11 [11]	3	25.13
2400-2483.5	g	2412-2462	1-11 [11]	3	28.38
2400-2483.5	HT20	2412-2462	1-11 [11]	3	28.25
2400-2483.5	HT40	2422-2452	3-9 [7]	3	22.50

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.
Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input checked="" type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input checked="" type="checkbox"/>	RF connector provided
	<input checked="" type="checkbox"/> Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
	<input type="checkbox"/> Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information				
No.	Ant. Model	Ant. Type	Connector	Gain (dBi)
1	Ant 1 (1002302)	PCB Dipole antenna	UFL	2.1859
2	Ant 3 (1002303)	PCB Dipole antenna	UFL	3.3341
3	Ant 5 (1002304)	PCB Dipole antenna	UFL	4.2057



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input checked="" type="checkbox"/> Plug-in radio	

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100.00% - IEEE 802.11b	0.00
<input checked="" type="checkbox"/> 98.45% - IEEE 802.11g	0.07
<input checked="" type="checkbox"/> 98.36% - IEEE 802.11n (HT20)	0.07
<input checked="" type="checkbox"/> 99.29% - IEEE 802.11n (HT40)	0.03

1.1.5 EUT Operational Condition

Power Supply Type	3.3 Vdc from host
-------------------	-------------------



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 558074 D01 DTS Meas Guidance v03r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01

1.3 Testing Location Information

Testing Location				
	HWA YA	ADD	FCC	
<input checked="" type="checkbox"/>		No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	Test Site No.	
		TEL : 886-3-327-3456	Test Engineer	
<input checked="" type="checkbox"/>	ICC Lab	No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.	Test Environment	Test Date
		TEL : 886-3-271-8640	22°C / 63%	Nov. 14, 2014
		FAX : 886-3-327-0973	23°C / 55%	Feb. 21, 2014
			22°C / 63%	May 02, 2014
Test Condition				
RF Conducted	TH01-HY	Mark Liao	22°C / 63%	Nov. 14, 2014
AC Conduction	*CO01-WS	Skys Huang	23°C / 55%	Feb. 21, 2014
Radiated Emission	*03CH01-WS	Anderson Hung		
Test site registered number [657002] with FCC				
Test site registered number [10807A-1] with IC				

Note: * Sporton Lab subcontracts this test item to ICC lab (TAF:2732).

ICC lab is a TAF accreditation test firm and also is an approved provider of Sporton Lab.



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty		
Test Item	Uncertainty	Limit
AC power-line conducted emissions	±2.92 dB	N/A
Emission bandwidth, 6dB bandwidth	±1.42 %	N/A
RF output power, conducted	±0.63 dB	N/A
Power density, conducted	±0.81 dB	N/A
All emissions, radiated	30 – 1000 MHz	±3.26 dB
	Above 1 GHz	±4.94 dB
Temperature	±0.8 °C	N/A
Humidity	±3 %	N/A
DC and low frequency voltages	±3 %	N/A
Time	±1.42 %	N/A
Duty Cycle	±1.42 %	N/A



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11b	3	1-11 Mbps	1 Mbps
11g	3	6-54 Mbps	6 Mbps
HT20	3	MCS 0-23	MCS 0
HT40	3	MCS 0-23	MCS 0

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std. 802.11	Test Channel Frequencies (MHz)
b, g, n (HT-20)	2412-(F1), 2437-(F2), 2462-(F3)
n (HT-40)	2422-(F4), 2437-(F5), 2452-(F6)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)							
Test Software	ART2-GUI, Version: 2.3						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		
		2412	2437	2462	2422	2437	2452
11b,1-11Mbps	3	20	19.5	19.5	--	--	--
11g,6-54Mbps	3	17.5	25	16.5	--	--	--
HT20,M0-23	3	16.5	25	16	--	--	--
HT40,M0-23	3	--	--	--	14.5	16	13.5



2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, 6dB bandwidth, Power Spectral Density
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11b, 11g, HT20, HT40


The Worst Case Mode for Following Conformance Tests							
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions						
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.						
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst plane is Y-plane. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is X.						
Modulation Mode	11b, 11g, HT20, HT40						
Orthogonal Planes of EUT	<table><thead><tr><th>X Plane</th><th>Y Plane</th><th>Z Plane</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					



2.5 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E6430	DoC

2.6 Test Setup Diagram

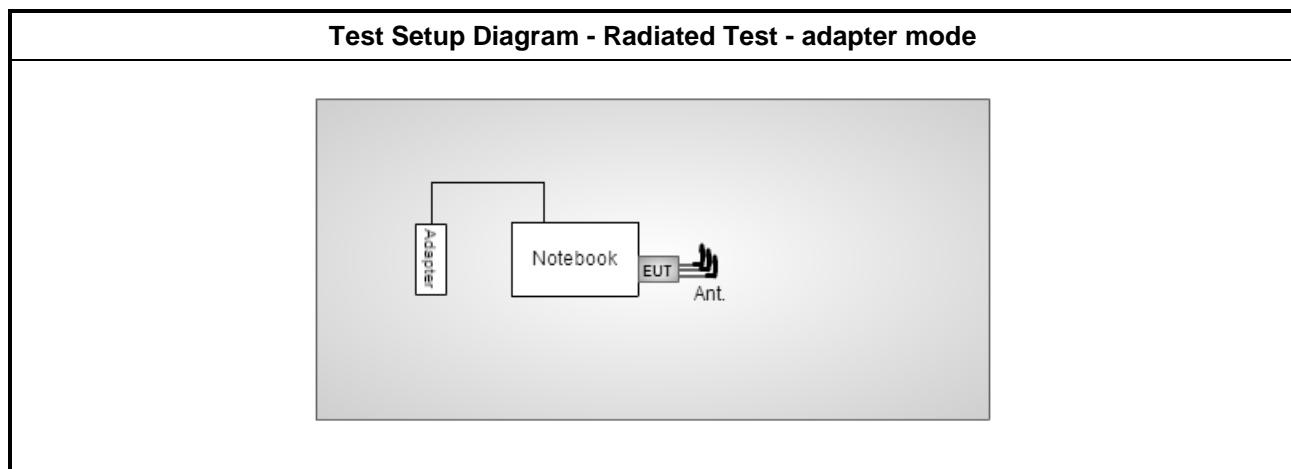

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 – 56 *	56 – 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


3.1.4 Test Setup

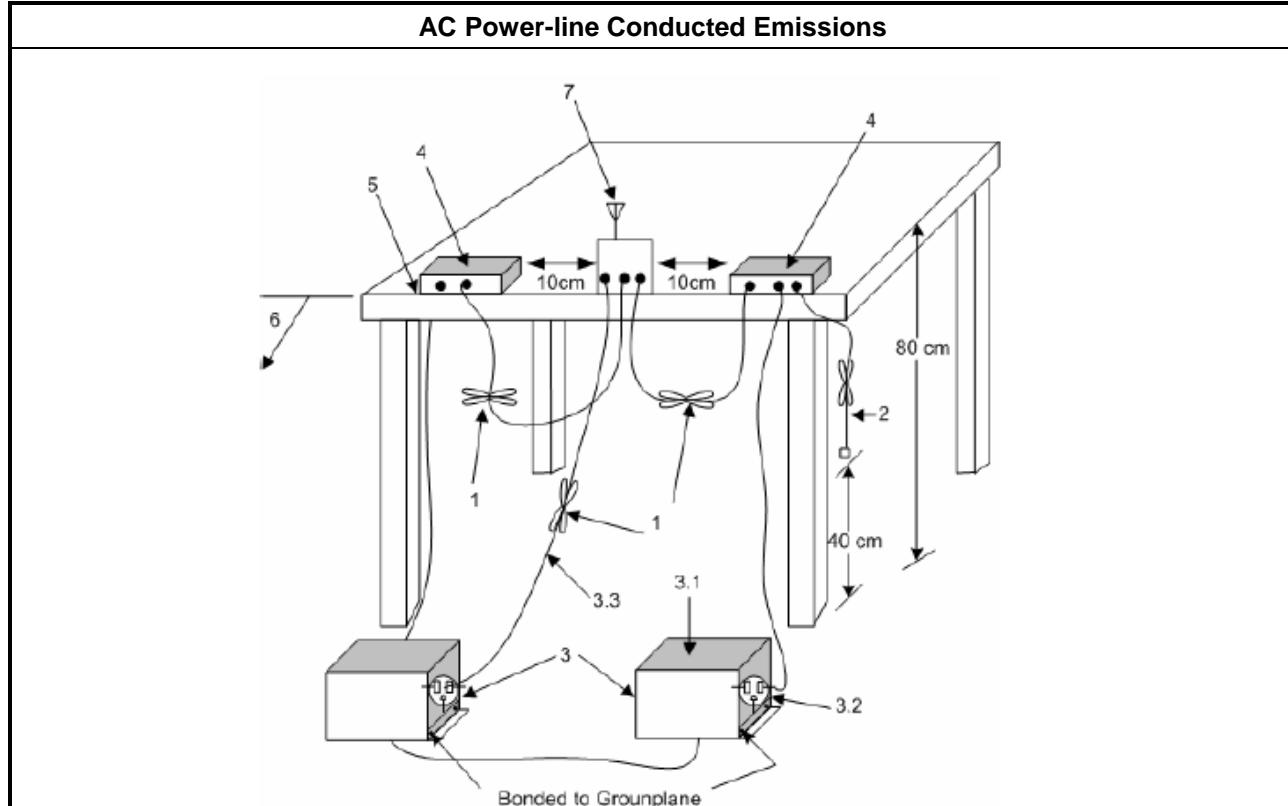



3.1.5 Test Result of AC Power-line Conducted Emissions

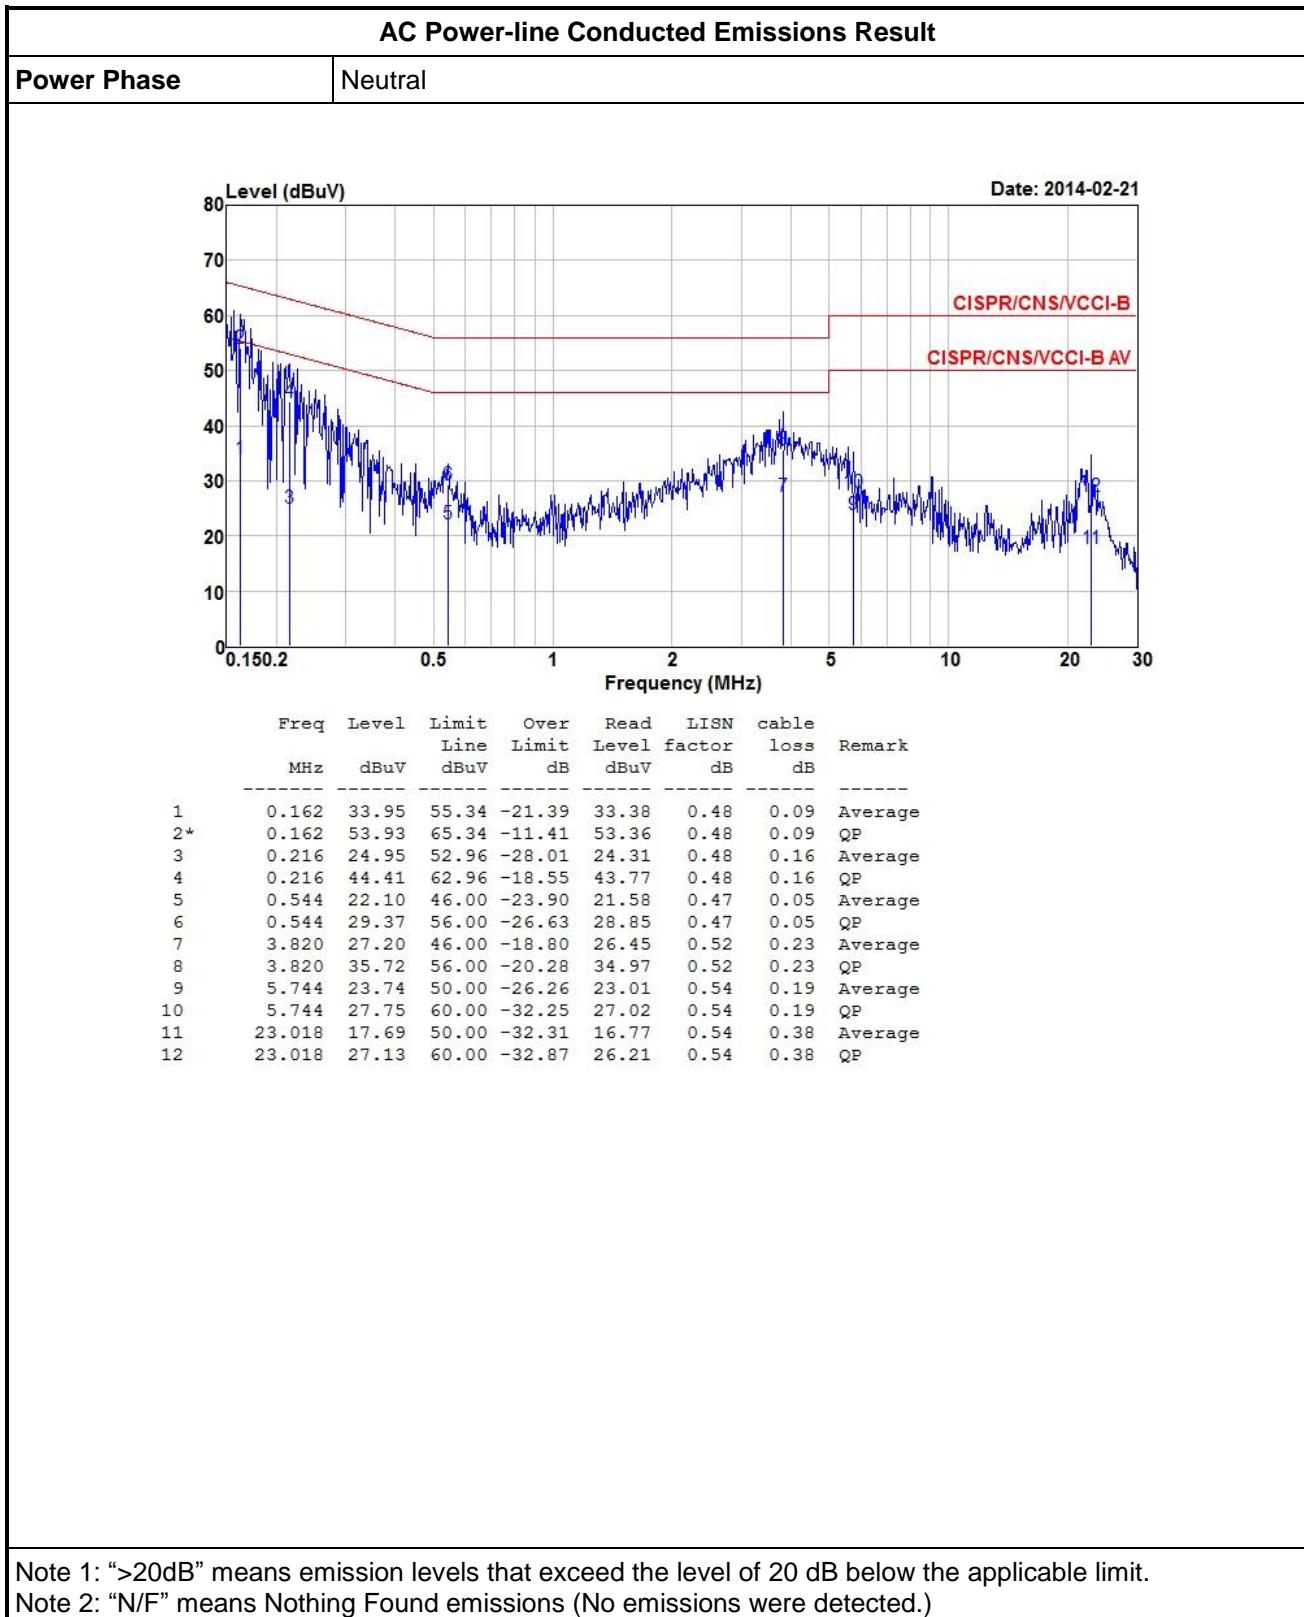

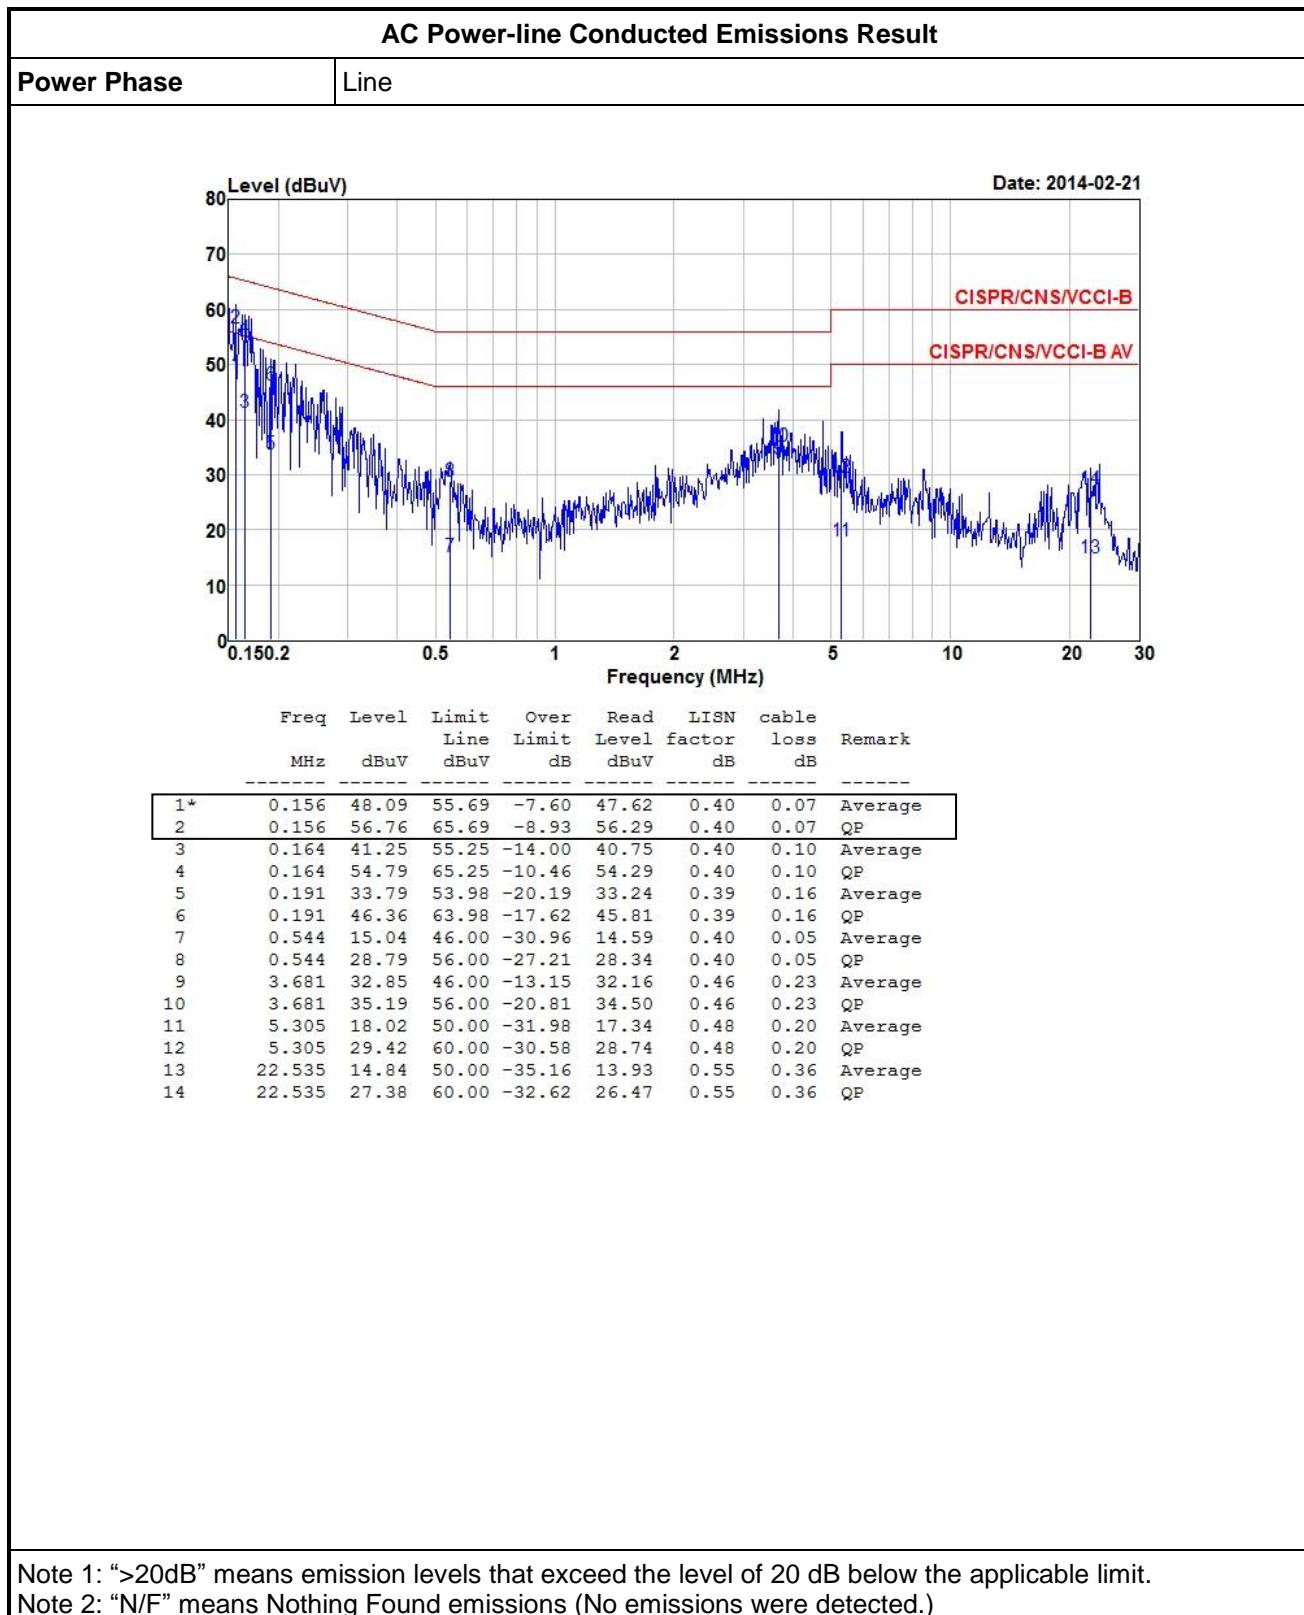

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<input checked="" type="checkbox"/> 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.
<input type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/> Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.


3.2.4 Test Setup

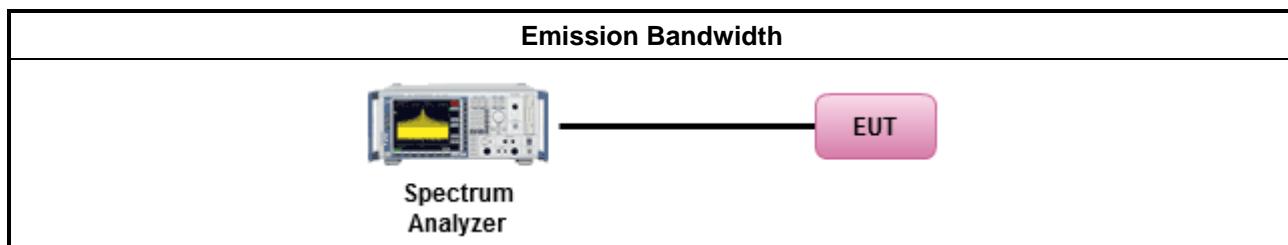



3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4	Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4
11b	3	2412	13.89	13.77	13.82	--	10.09	9.62	10.09	--
11b	3	2437	13.92	14.00	13.92	--	10.09	10.09	10.09	--
11b	3	2462	13.89	13.90	13.91	--	10.09	10.03	10.09	--
11g	3	2412	17.00	16.87	16.83	--	16.35	16.35	15.30	--
11g	3	2437	19.67	20.38	22.63	--	16.35	15.77	15.77	--
11g	3	2462	16.99	16.85	16.88	--	16.35	16.35	16.35	--
HT-20	3	2412	18.09	18.01	17.91	--	17.57	16.70	16.87	--
HT-20	3	2437	19.92	20.35	22.18	--	16.35	17.16	16.93	--
HT-20	3	2462	18.14	17.88	17.99	--	17.51	17.22	17.51	--
HT-40	3	2422	38.18	38.00	37.78	--	36.06	35.94	35.71	--
HT-40	3	2437	38.74	37.92	37.74	--	36.41	36.41	36.29	--
HT-40	3	2452	38.24	38.32	37.76	--	36.41	36.41	36.29	--
Limit			N/A				≥500 kHz			
Result			Complied							

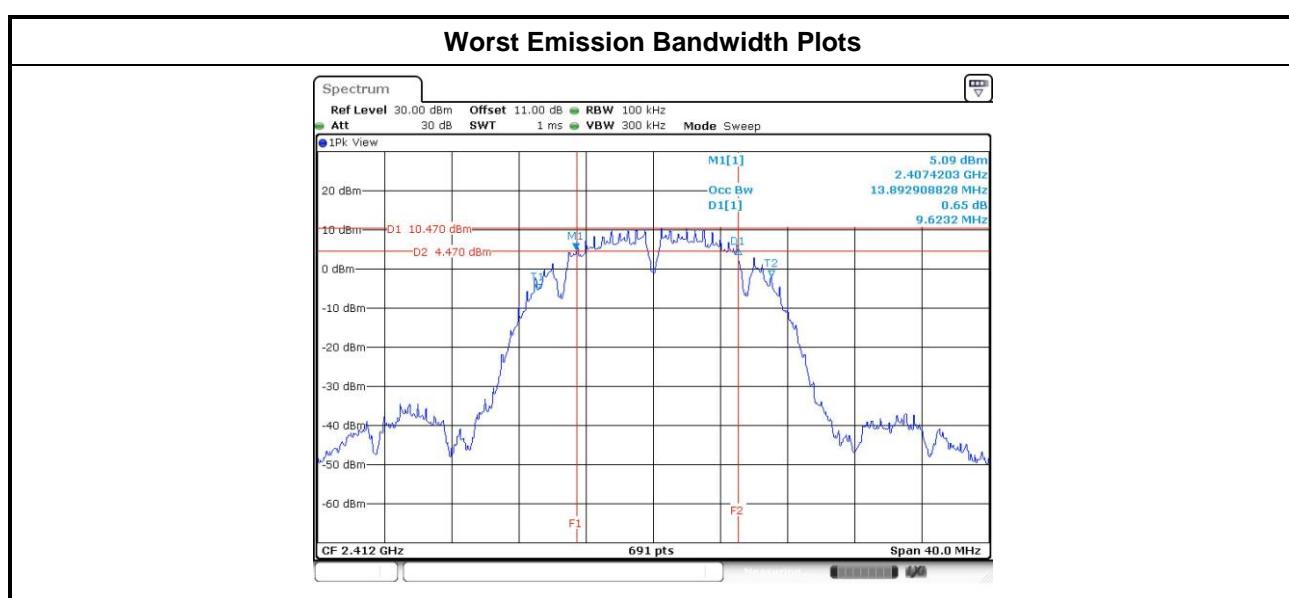Note 1: N_{TX} = Number of Transmit Chains



3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input checked="" type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)	
<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm	
<input type="checkbox"/> Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm	
<input type="checkbox"/> Smart antenna system (SAS):	
	<input type="checkbox"/> Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)	
<input type="checkbox"/> Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm	
<input type="checkbox"/> Smart antenna system (SAS)	
	<input type="checkbox"/> Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method
<input type="checkbox"/> Maximum Peak Conducted Output Power
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 9.1.1 (RBW \geq DTS BW).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 9.1.2 (Peak power meter)
<input checked="" type="checkbox"/> Maximum Conducted Output Power (Reference only)
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
RF power meter and average over on/off periods with duty factor or gated trigger
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 9.2.3.2 Method AVGPM-G (using a gated RF average power meter)
<input checked="" type="checkbox"/> For conducted measurement.
<input type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

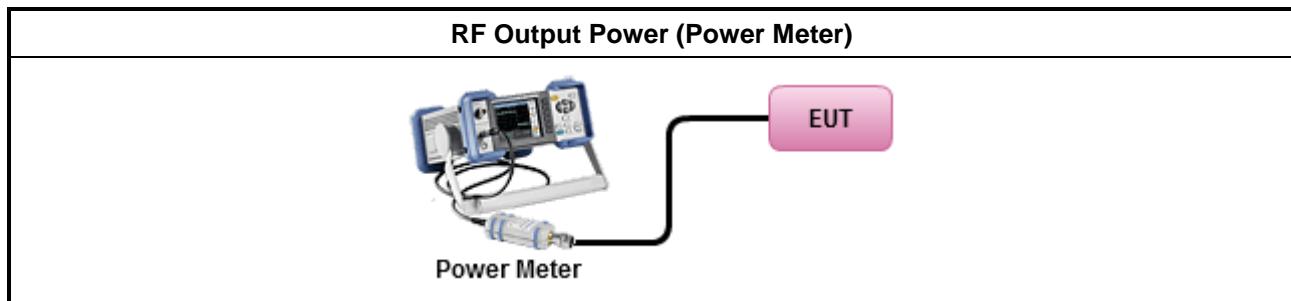



3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	3	-
Maximum G_{ANT} (dBi)		2.1859	3.3341	4.2057	-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS}	STBC	Array Gain (dB)
11b,1-11Mbps	4.2057	3	1	-	-
11g,6-54Mbps	4.2057	3	1	-	-
HT20,M0-23	4.2057	3	1	-	-
HT40,M0-23	4.2057	3	1	-	-

Note: If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain.

Directional gain = highest antenna gain + Array gain, Array gain = 0dB since the device supports CDD mode.



3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted (Average) Output Power												
Condition			RF Output Power (dBm)									
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11b	3	2412	20.21	20.45	20.42	--	25.13	30.00	4.2057	29.3357	36.00	
11b	3	2437	19.82	20.39	19.86	--	24.80	30.00	4.2057	29.0057	36.00	
11b	3	2462	19.85	20.39	19.64	--	24.74	30.00	4.2057	28.9457	36.00	
11g	3	2412	18.14	18.32	18.21	--	23.00	30.00	4.2057	27.2057	36.00	
11g	3	2437	23.72	23.77	23.31	--	28.38	30.00	4.2057	32.5857	36.00	
11g	3	2462	17.39	17.58	17.18	--	22.16	30.00	4.2057	26.3657	36.00	
HT-20	3	2412	17.45	17.85	17.43	--	22.35	30.00	4.2057	26.5557	36.00	
HT-20	3	2437	23.55	23.66	23.20	--	28.25	30.00	4.2057	32.4557	36.00	
HT-20	3	2462	16.75	16.54	16.68	--	21.43	30.00	4.2057	25.6357	36.00	
HT-40	3	2422	15.94	16.04	16.44	--	20.92	30.00	4.2057	25.1257	36.00	
HT-40	3	2437	17.85	17.94	17.38	--	22.50	30.00	4.2057	26.7057	36.00	
HT-40	3	2452	14.67	15.36	15.18	--	19.85	30.00	4.2057	24.0557	36.00	
Result			Complied									



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) $\leq 8 \text{ dBm}/30\text{kHz}$

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 10.2 Method PKPSD (RBW=3kHz; detector=peak)..
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<input checked="" type="checkbox"/> For conducted measurement.
<input type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N_{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.




3.4.4 Test Setup

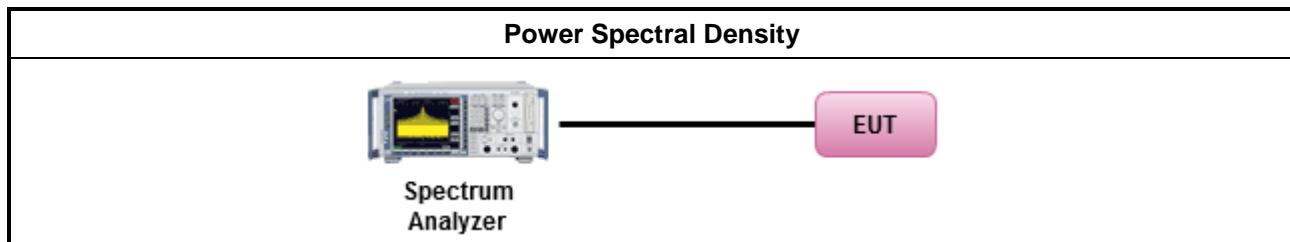

3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result					
Condition			Power Spectral Density (dBm/3kHz)		
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	Power Limit	
11b	3	2412	1.60	5.95	
11b	3	2437	1.21	5.95	
11b	3	2462	0.95	5.95	
11g	3	2412	-1.91	5.95	
11g	3	2437	3.07	5.95	
11g	3	2462	-3.31	5.95	
HT-20	3	2412	-3.35	5.95	
HT-20	3	2437	2.71	5.95	
HT-20	3	2462	-4.05	5.95	
HT-40	3	2422	-7.29	5.95	
HT-40	3	2437	-5.50	5.95	
HT-40	3	2452	-8.00	5.95	
Result		Complied			

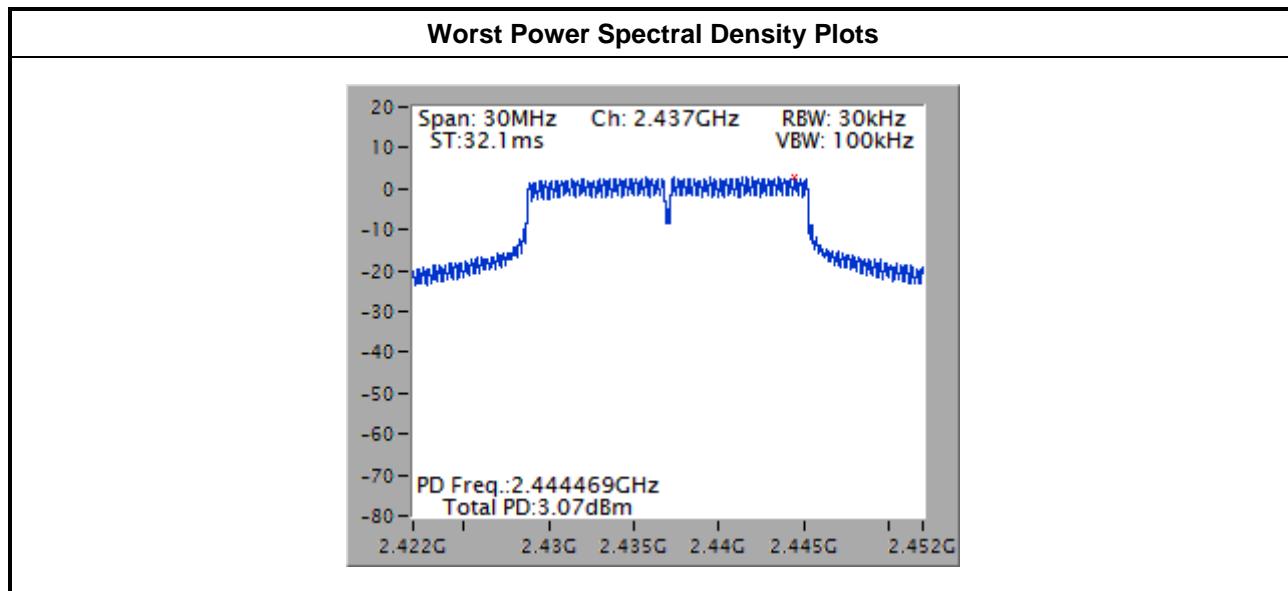

Note:

1. Test results are bin-by-bin summing measured value of each TX port.
2. Directional gain = $10 * \log((10^{2.1859/20} + 10^{3.3341/20} + 10^{4.2057/20})^2/3) = 8.05 \text{ dBi} > 6 \text{ dBi}$
Limit shall be reduced to $8 \text{ dBm} - (8.05 \text{ dBi} - 6 \text{ dBi}) = 5.95 \text{ dBm}$

3.5 Emissions in non-restricted frequency bands

3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level


3.5.4 Test Setup

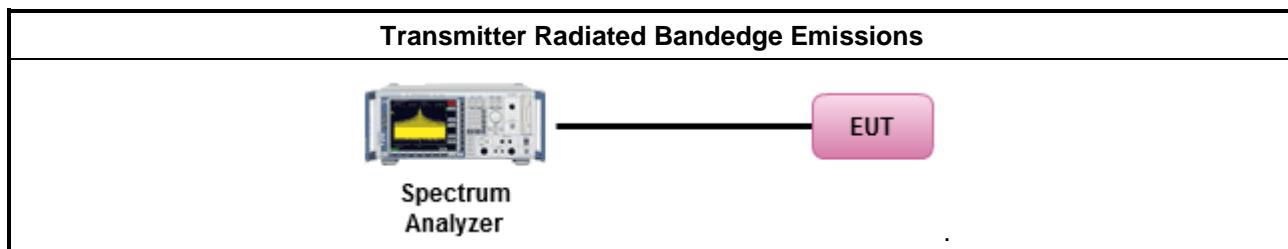



3.5.5 Test Result of Emissions in non-restricted frequency bands

This test item is performed on each TX output individually without summing or adding $10 \log(N_{ANT})$ since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

3.5.6 Test Result of Emissions in non-restricted frequency bands

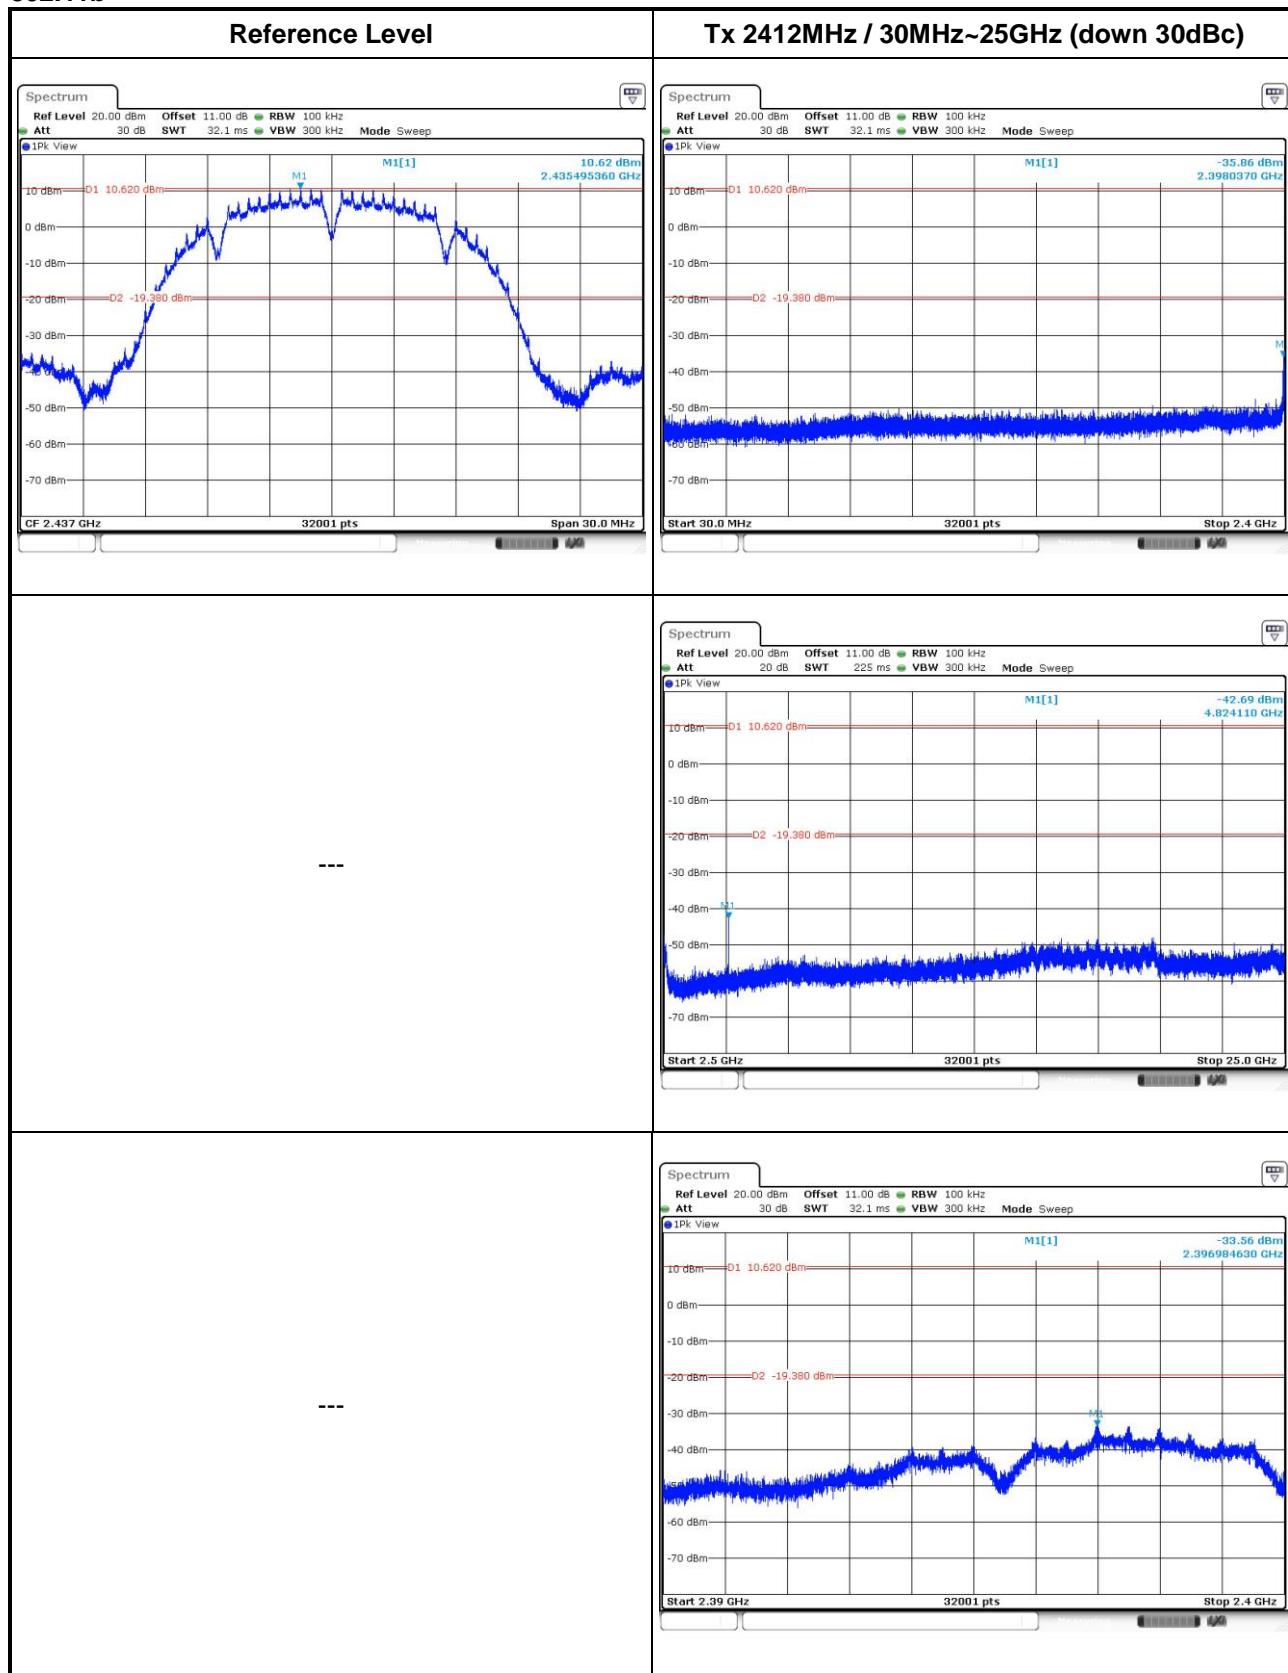
802.11b

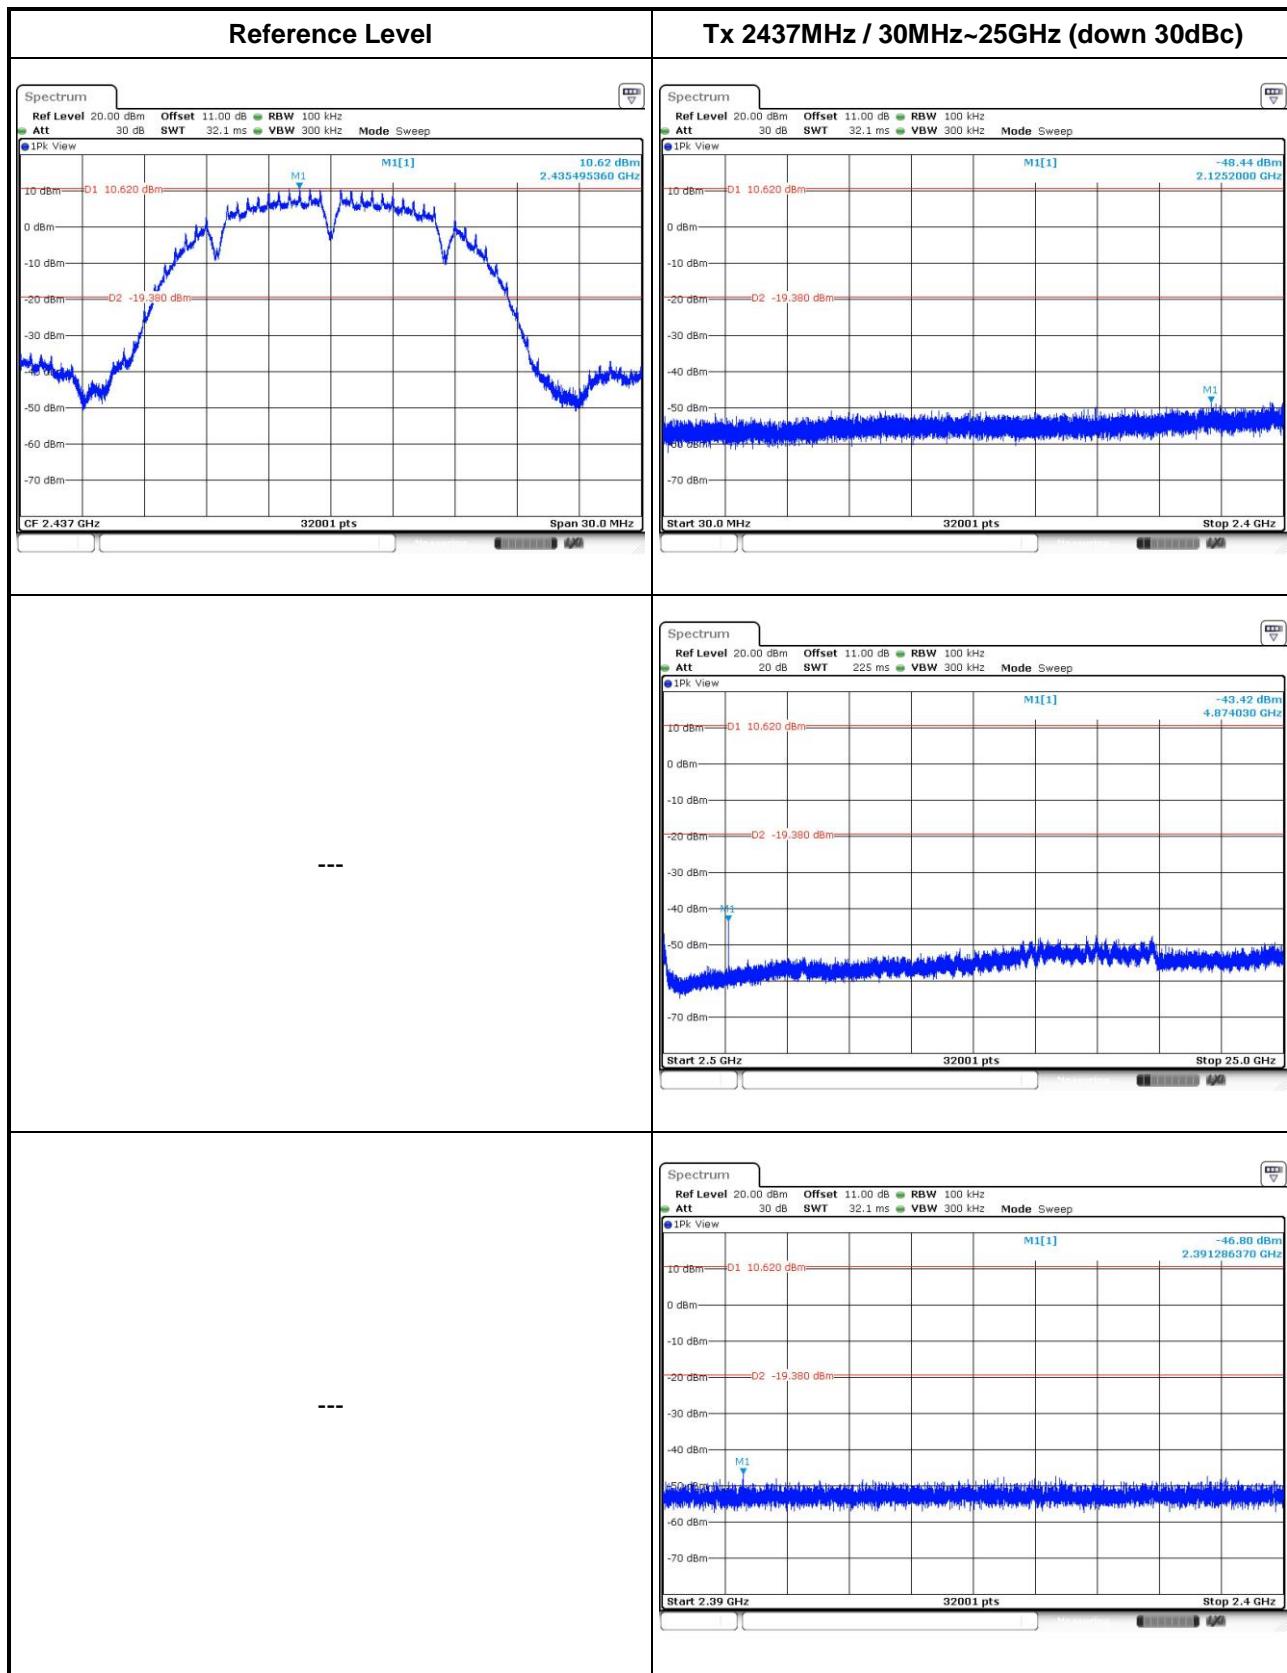
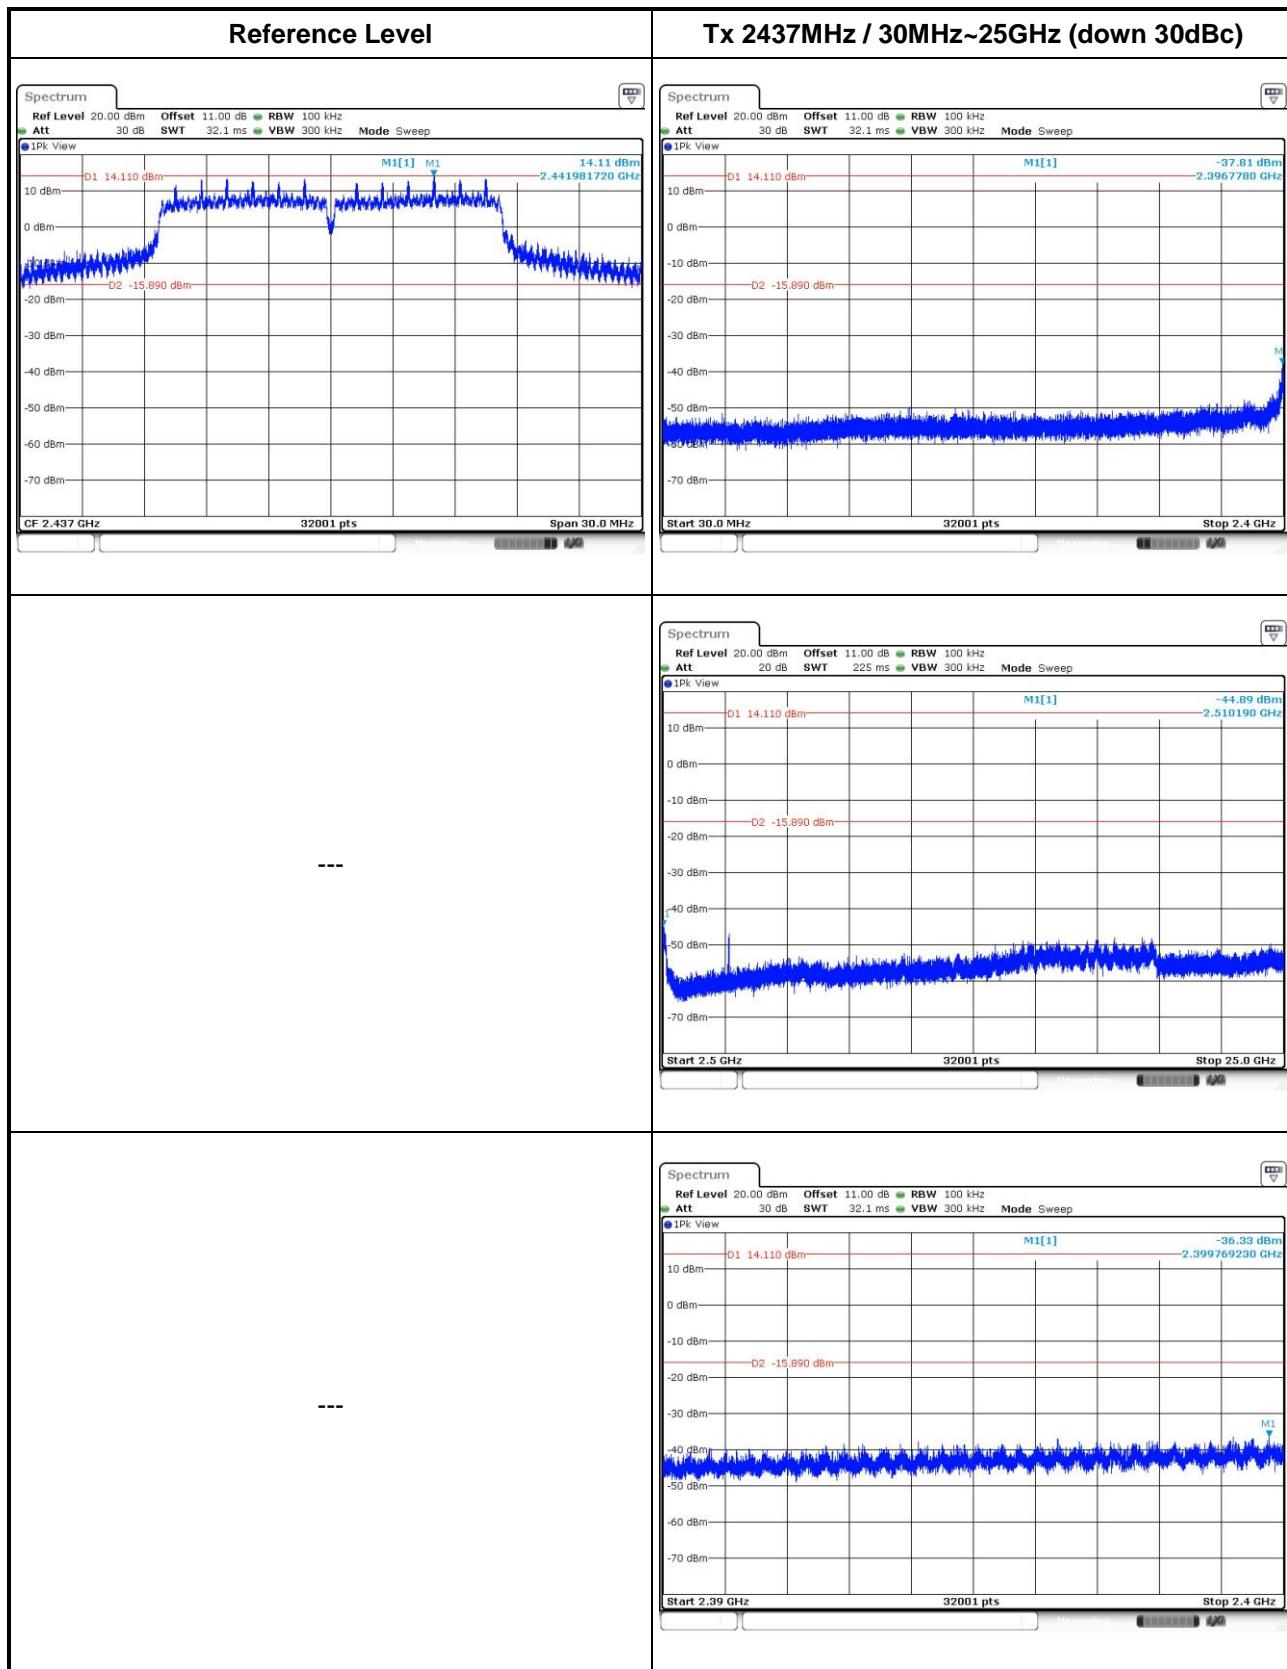


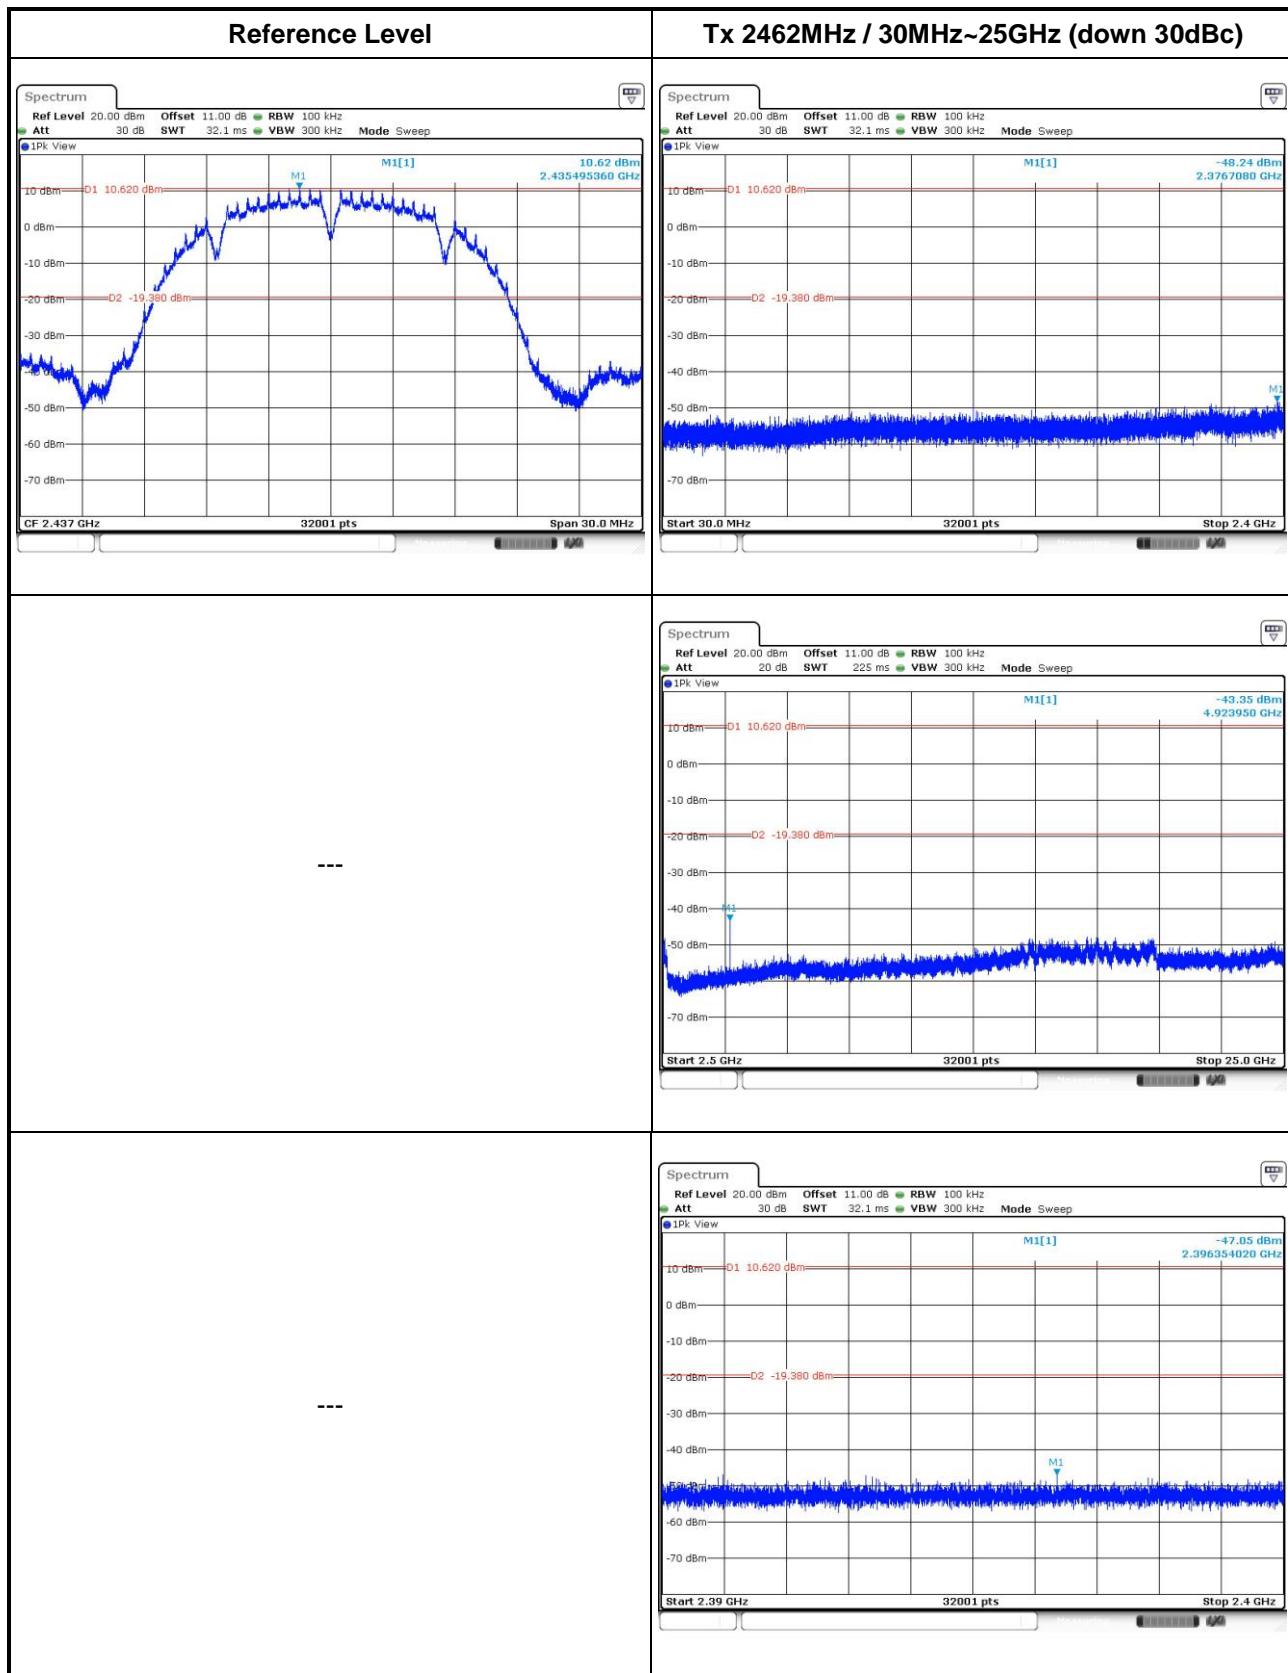




802.11g

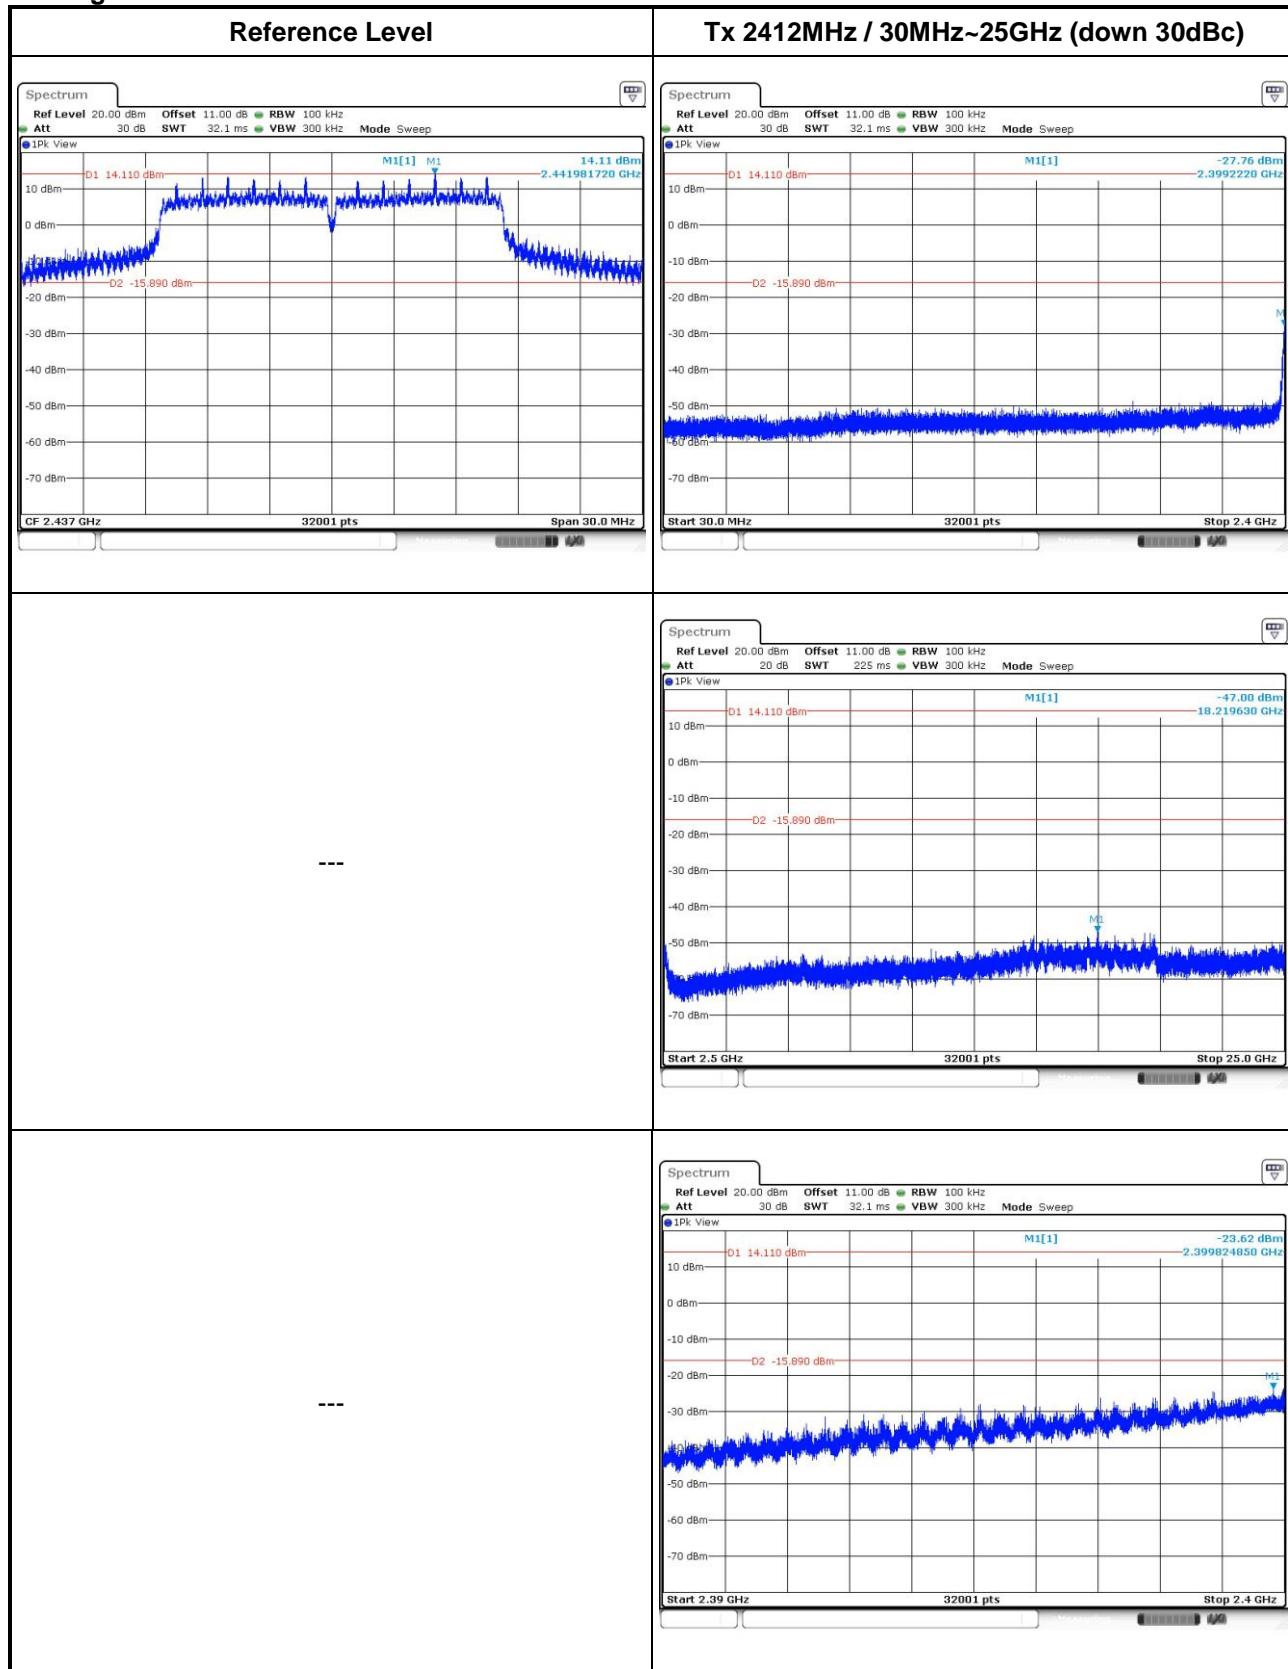





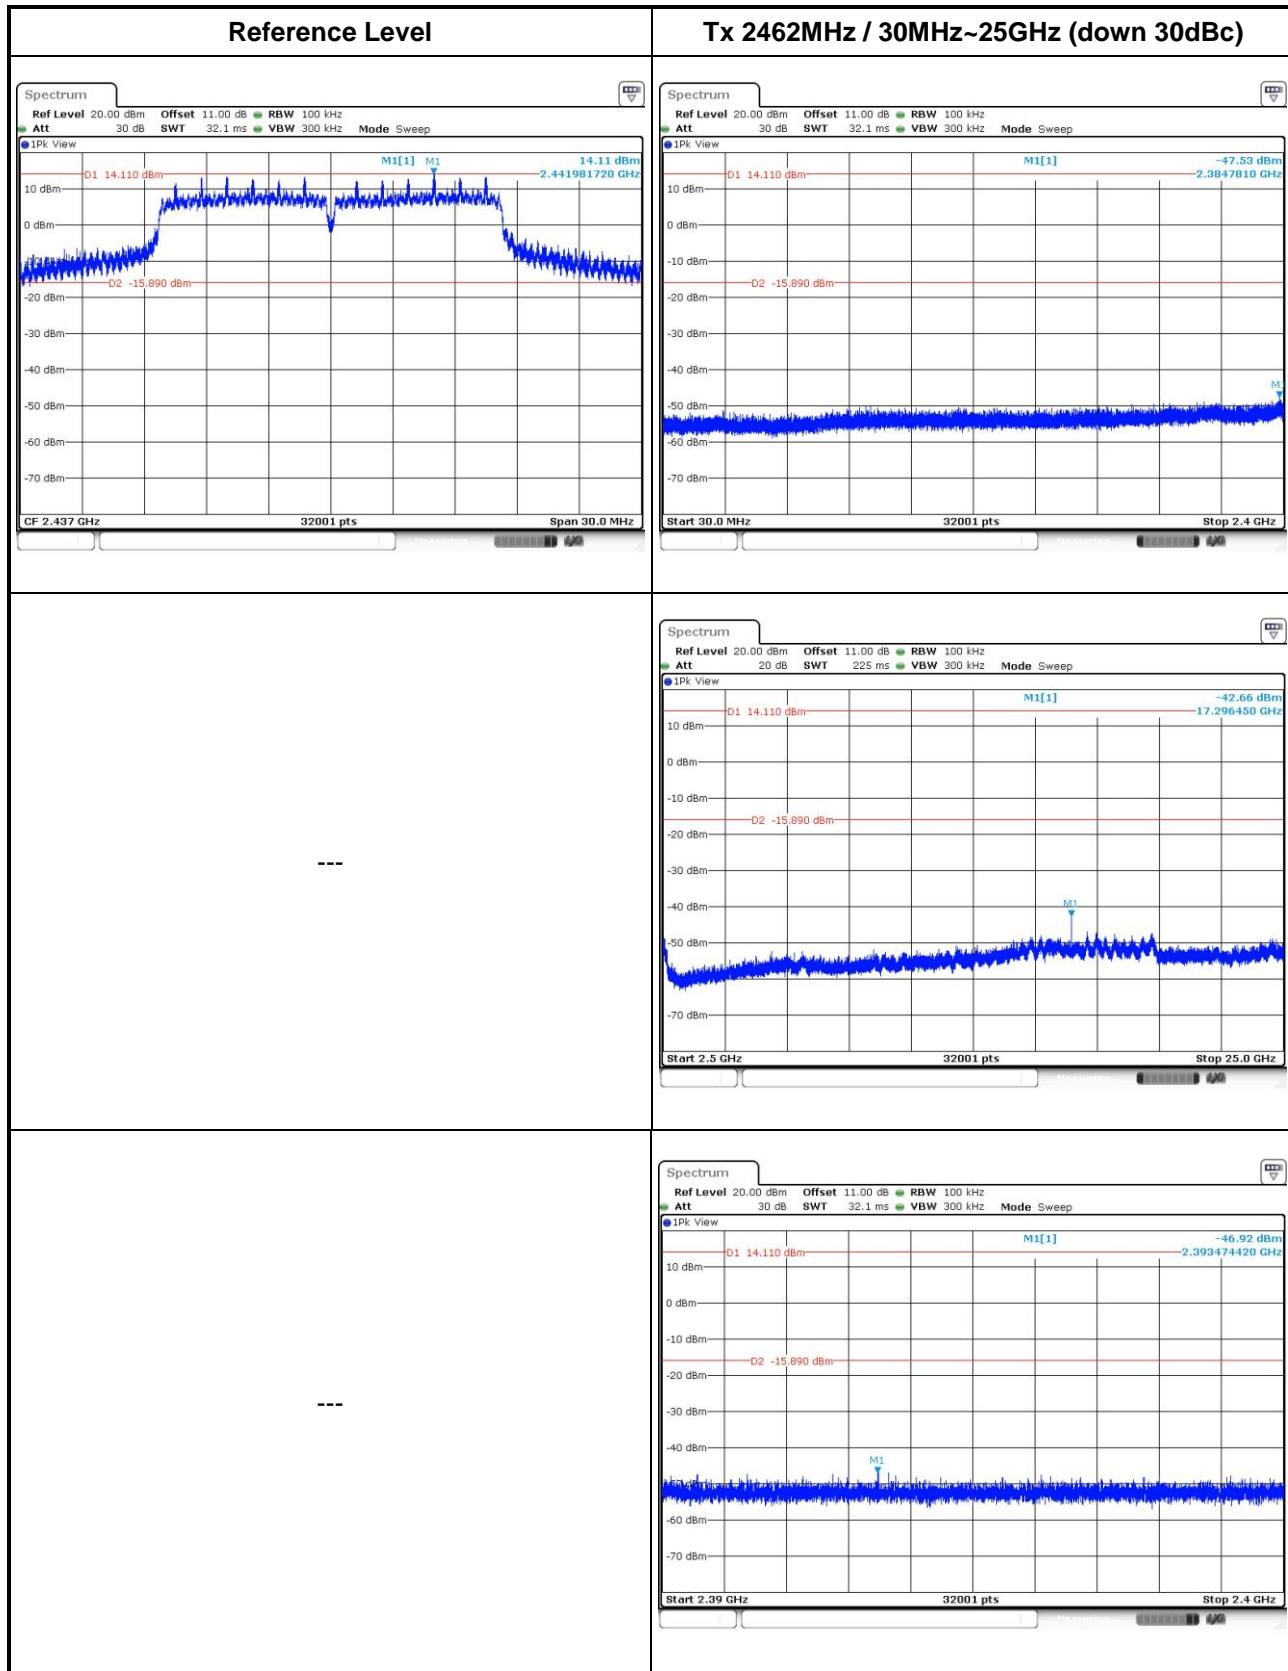




802.11n HT20

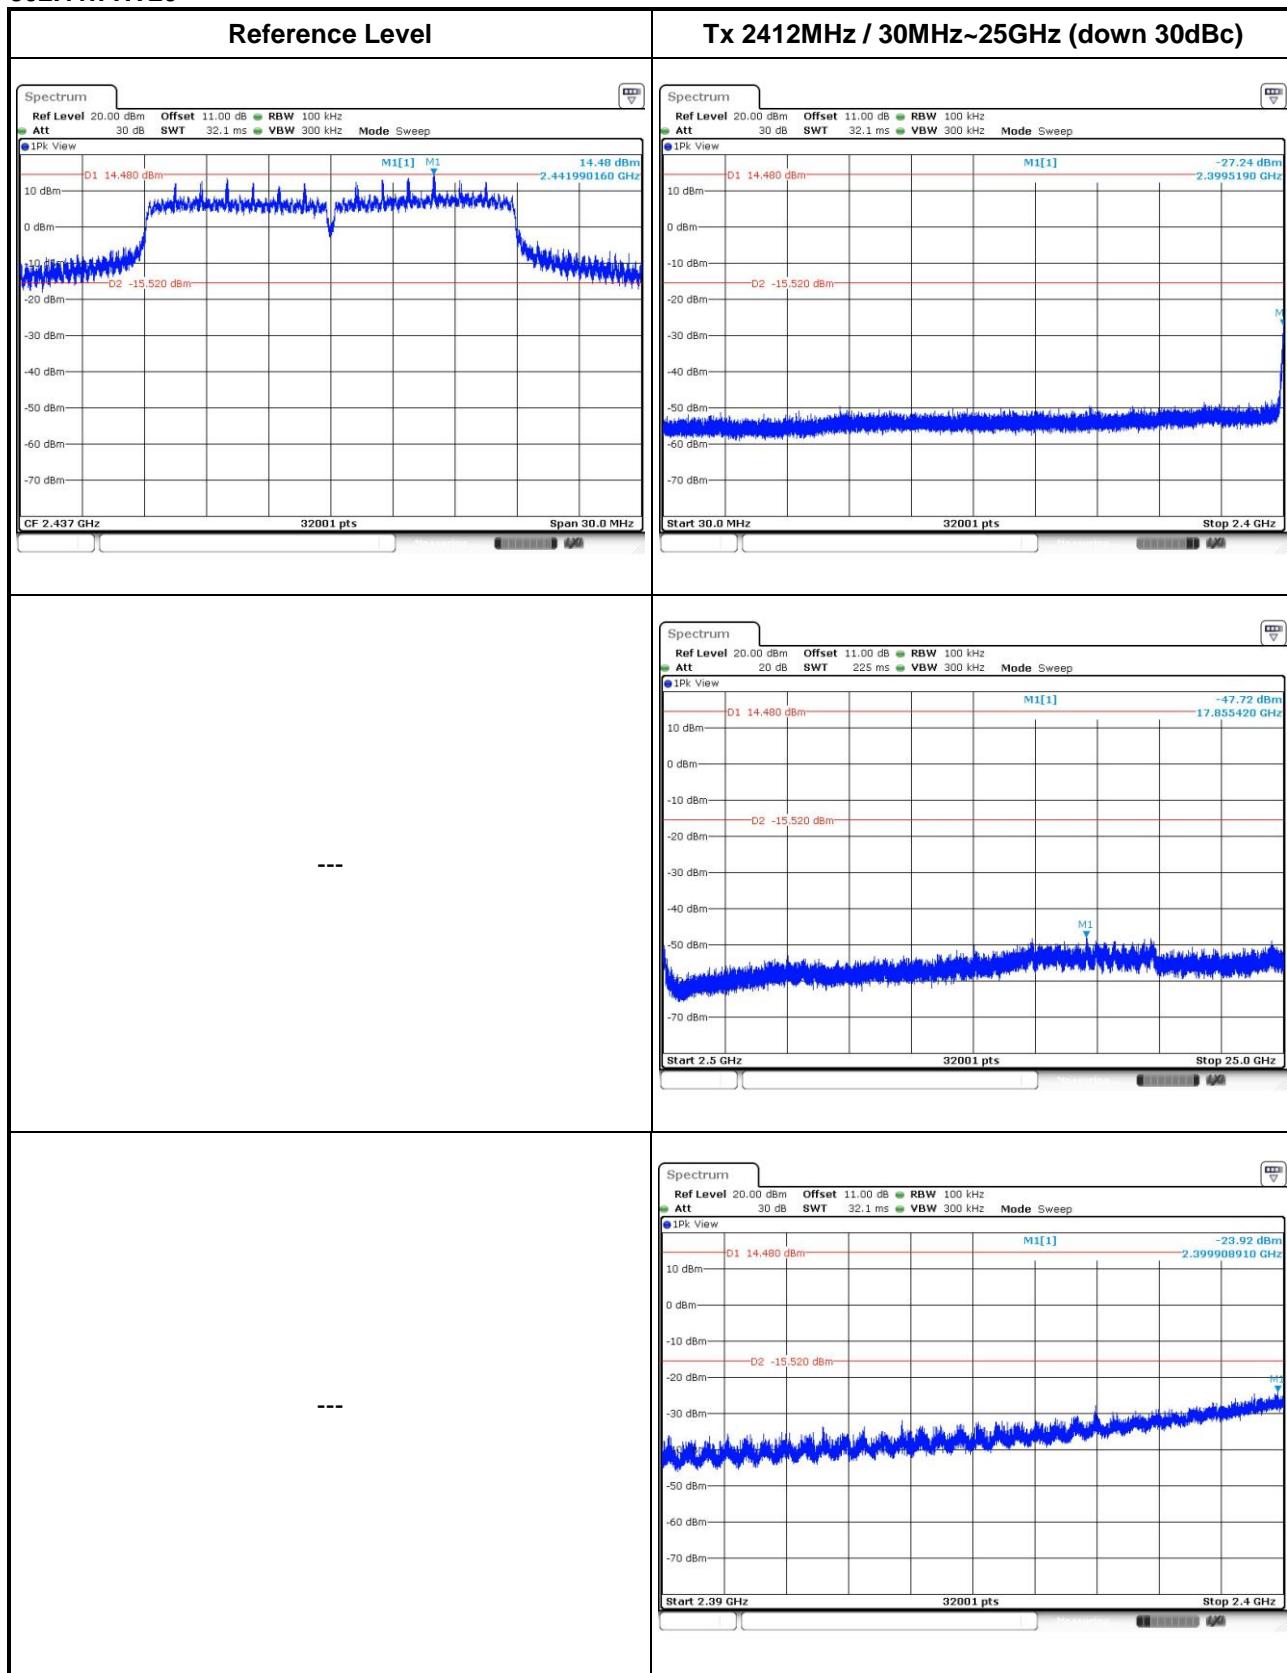


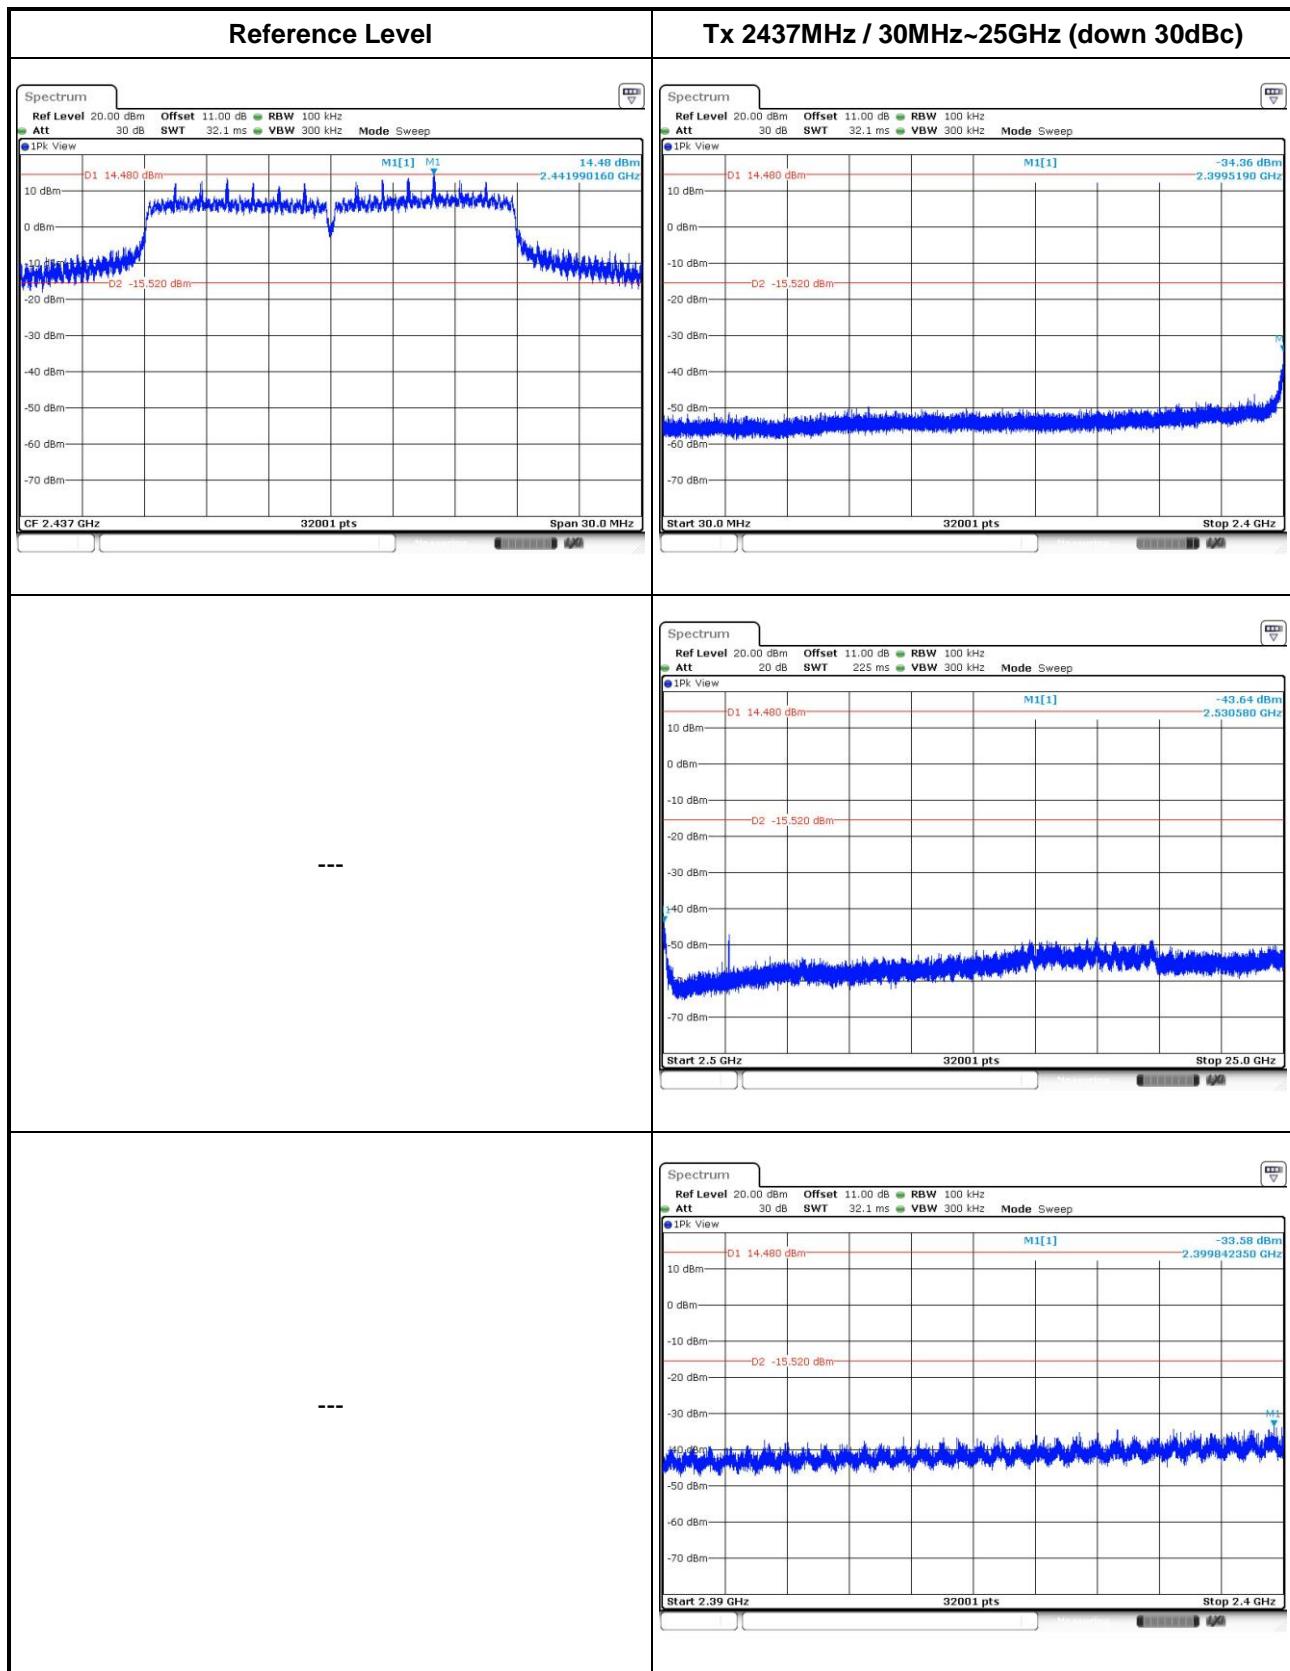


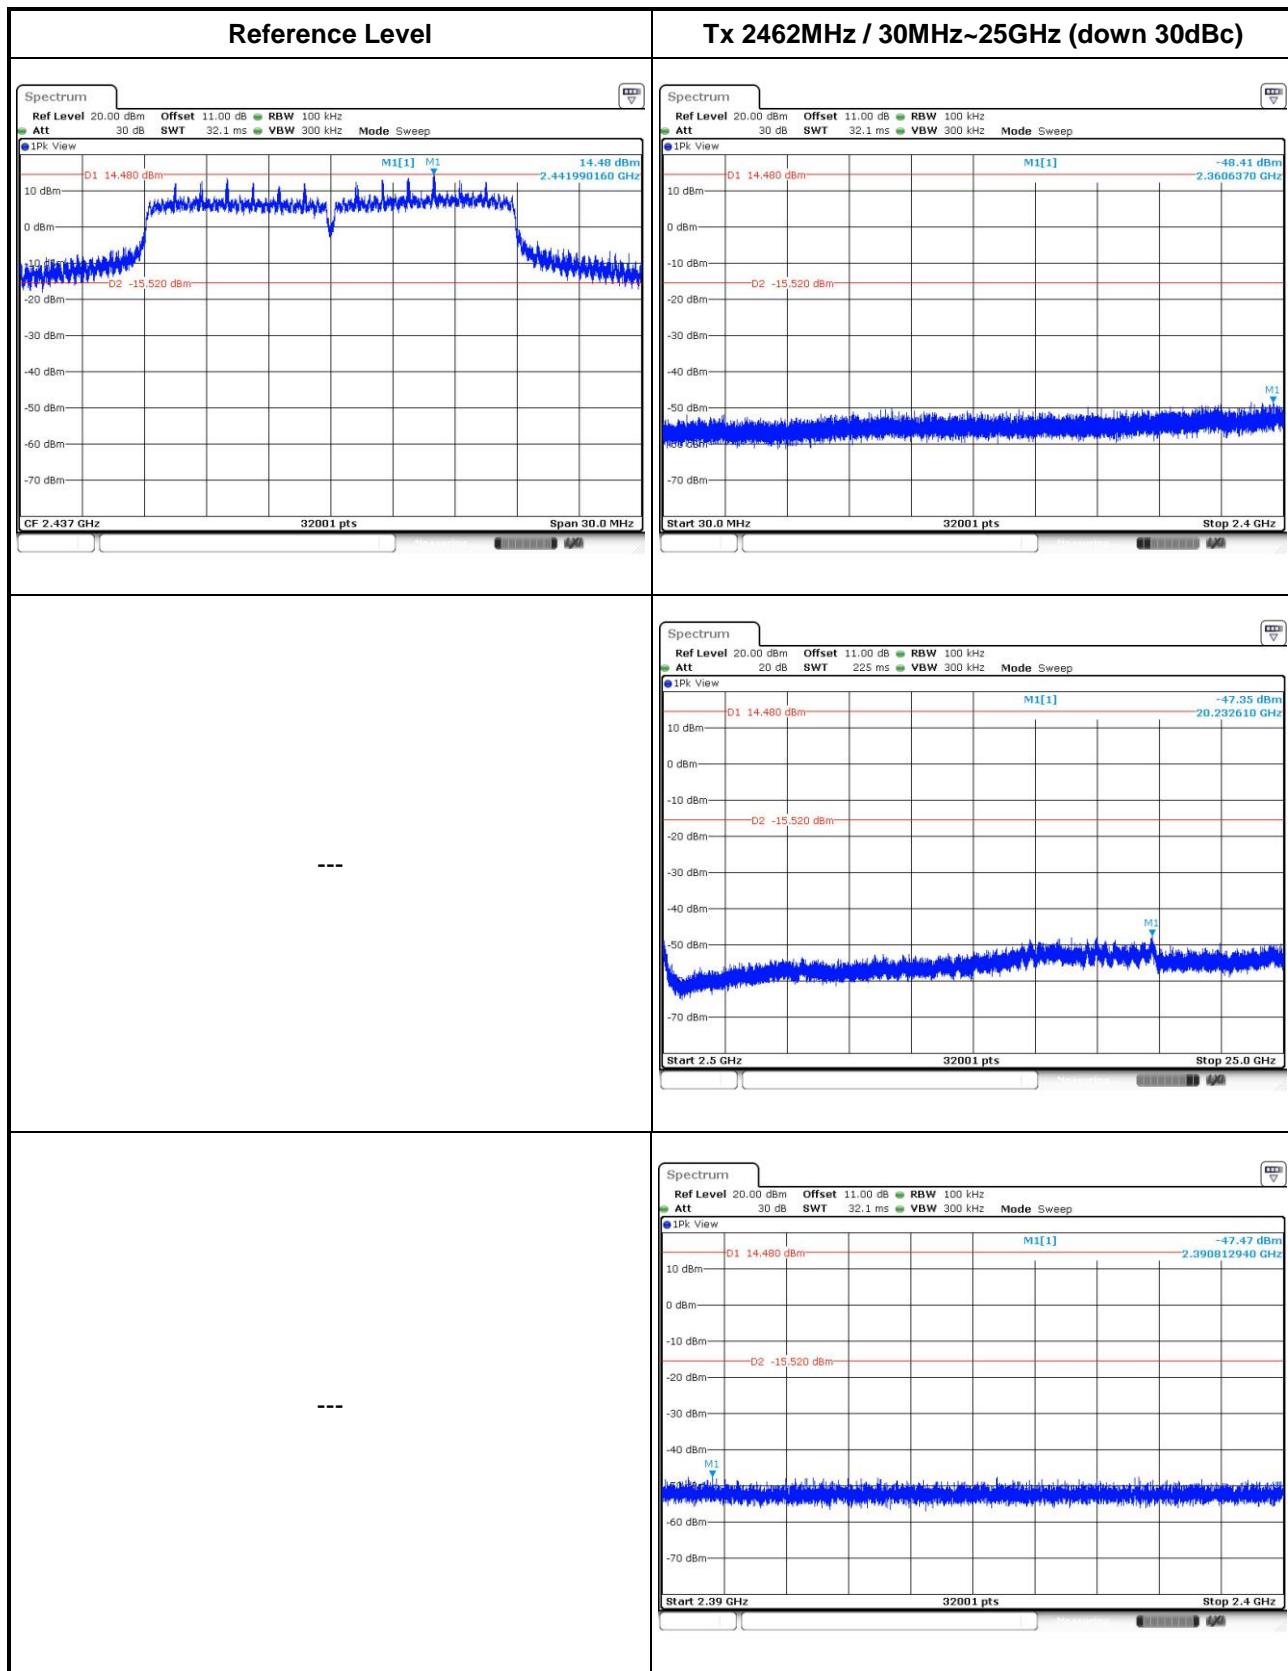




802.11n HT40

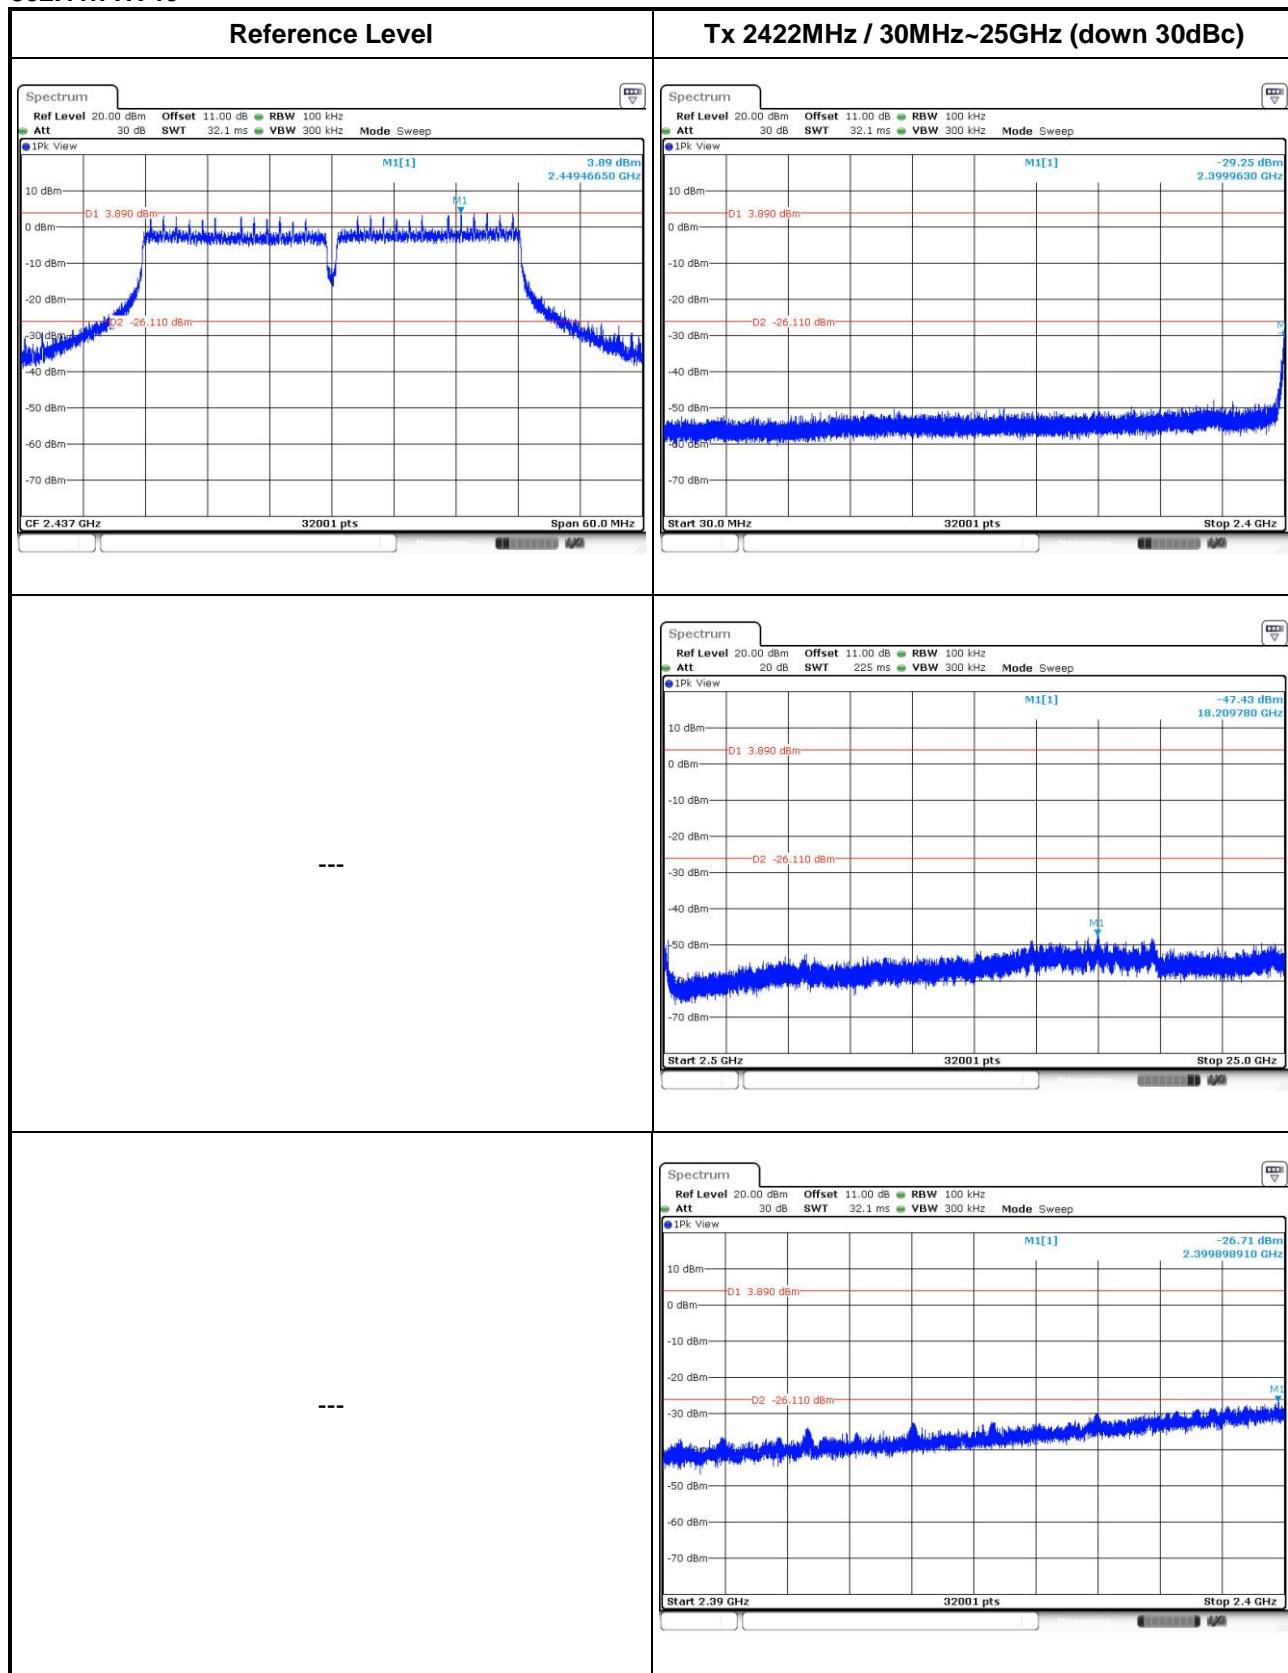

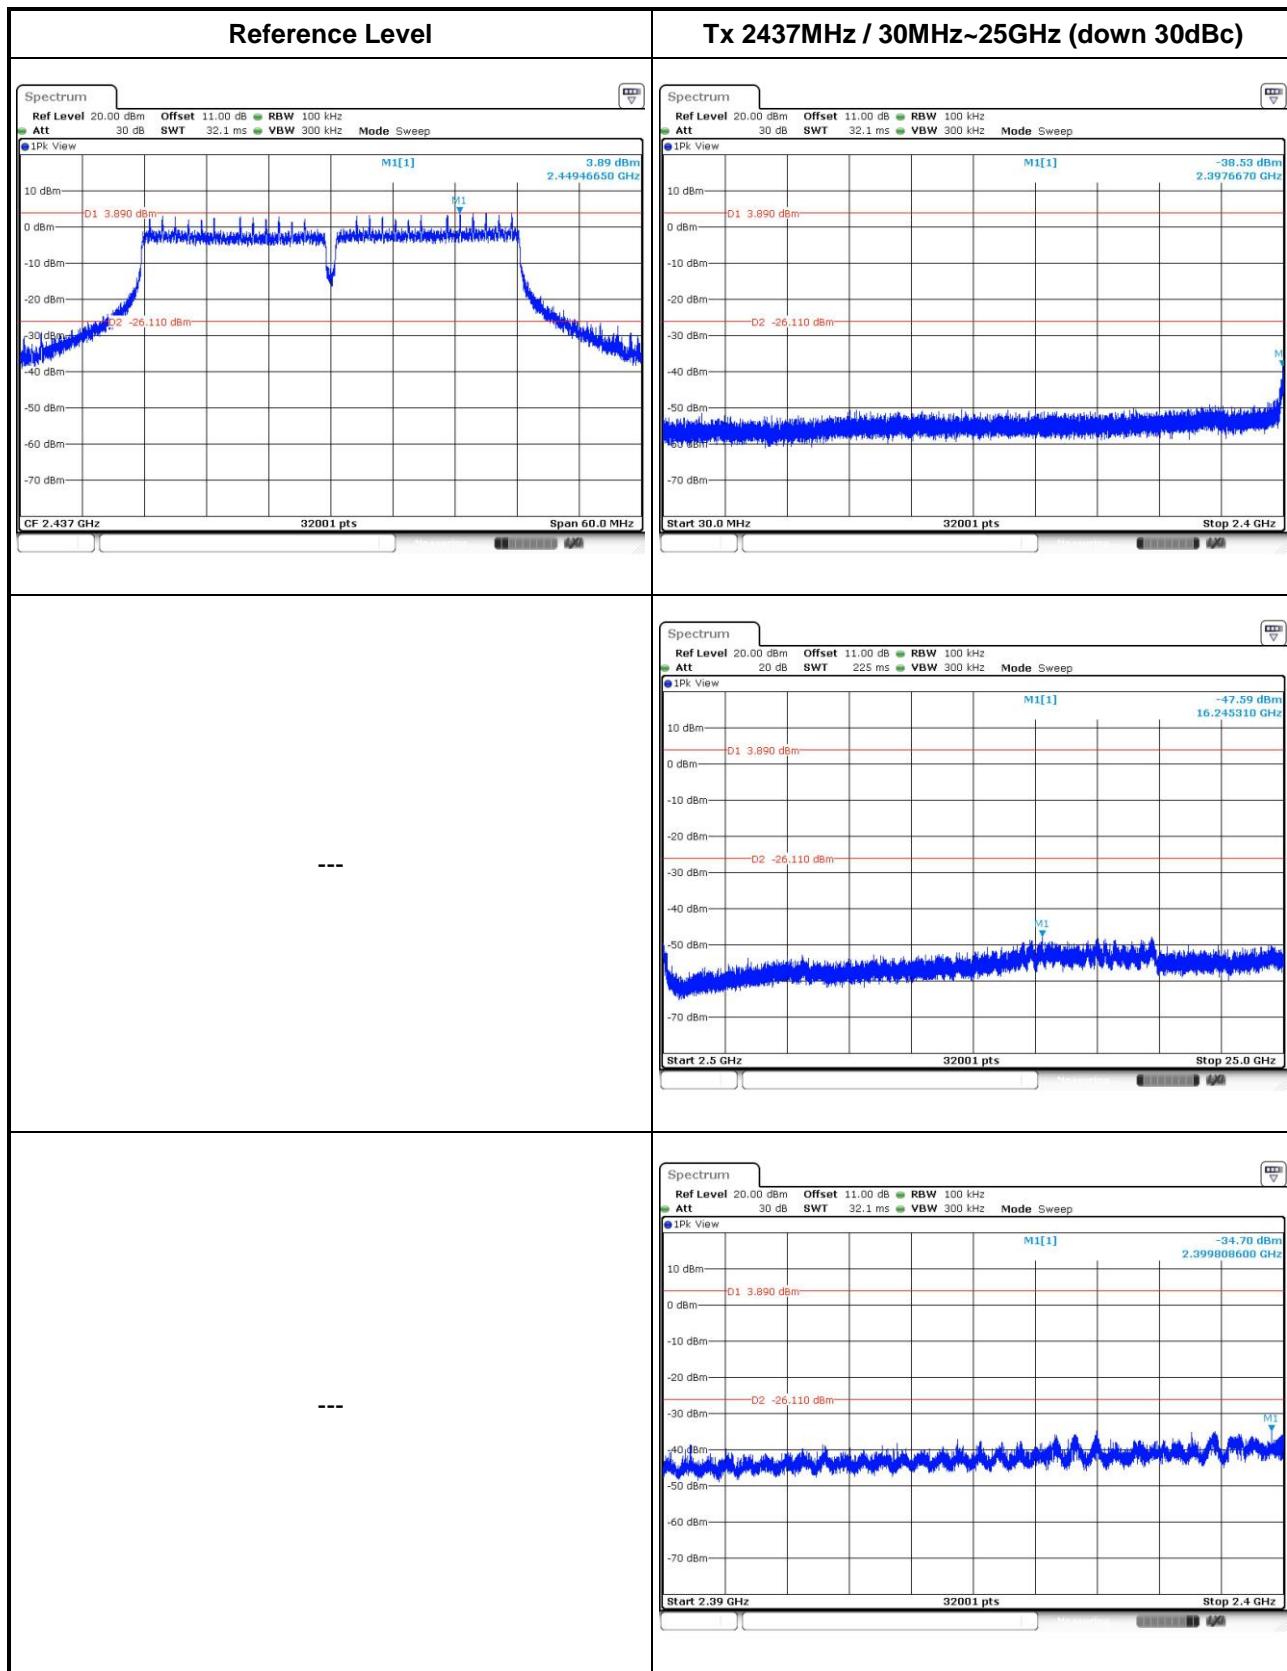

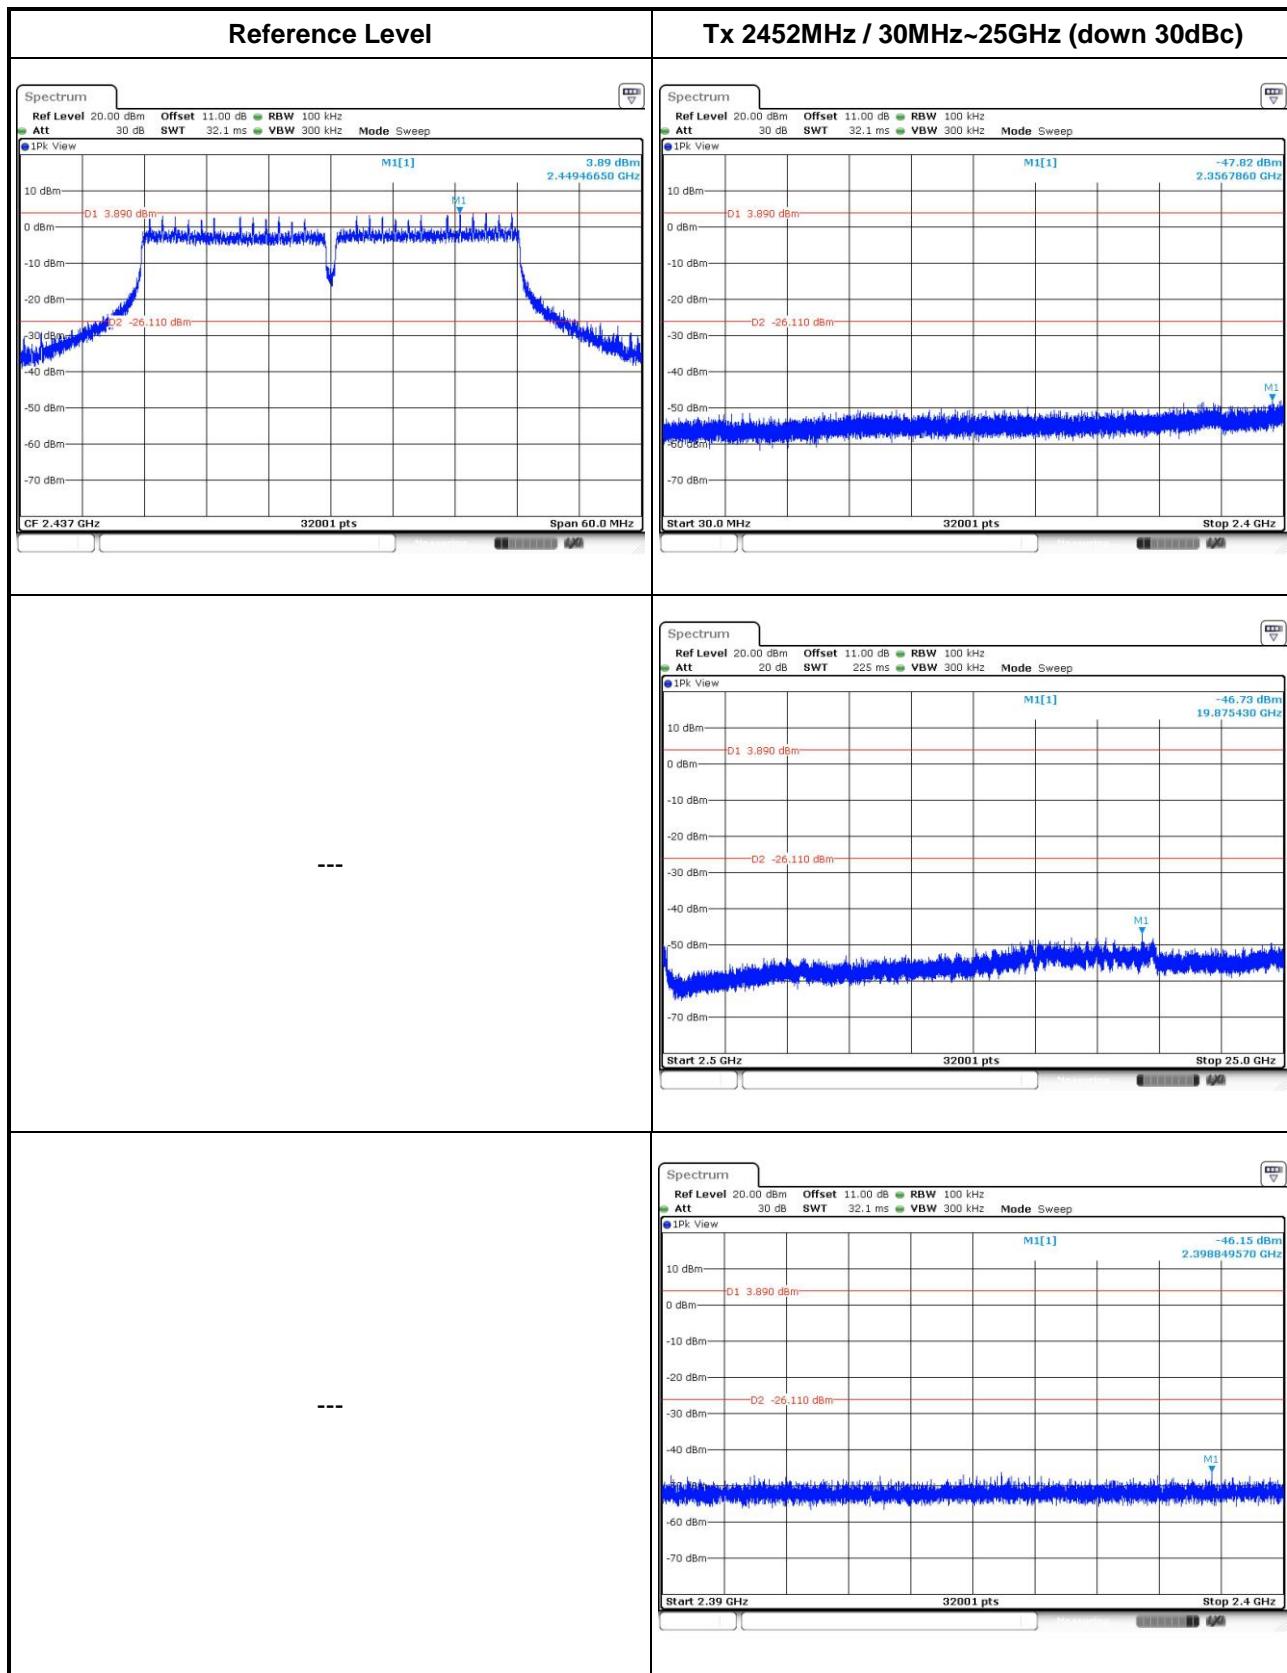



3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/> For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
<input type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 12.2.5.3 Option 3 (Reduced $VBW \geq 1/T$).
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$, where T is pulse time
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/> For radiated measurement, refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 12.2.7
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

Test Method
<input type="checkbox"/> For conducted and cabinet radiation measurement, refer as FCC KDB 558074 D01 DTS Meas Guidance v03r02, clause 12.2
<input type="checkbox"/> For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding $10 \log(N)$ if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/> For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add $10 \log(N)$ dB

3.6.4 Test Setup

Transmitter Radiated Unwanted Emissions

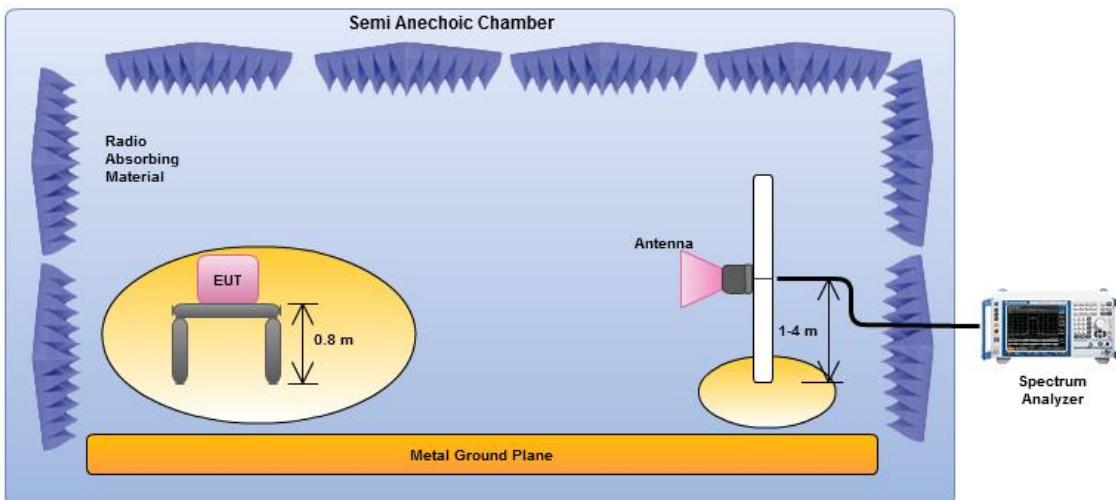

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

Note: Test distance is 3m.


3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)																																																																																							
Modulation Mode	11g		Test Freq. (MHz)		2437																																																																																		
Polarization	H																																																																																						
<table><thead><tr><th></th><th>Freq.</th><th>Emission level</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>127.85</td><td>32.43</td><td>43.50</td><td>-11.07</td><td>50.90</td><td>-18.47</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>184.36</td><td>35.98</td><td>43.50</td><td>-7.52</td><td>54.97</td><td>-18.99</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>232.64</td><td>36.12</td><td>46.00</td><td>-9.88</td><td>54.58</td><td>-18.46</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>362.89</td><td>35.61</td><td>46.00</td><td>-10.39</td><td>50.30</td><td>-14.69</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>698.49</td><td>37.22</td><td>46.00</td><td>-8.78</td><td>45.48</td><td>-8.26</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>896.14</td><td>41.87</td><td>46.00</td><td>-4.13</td><td>47.42</td><td>-5.55</td><td>QP</td><td>---</td><td>---</td></tr></tbody></table>											Freq.	Emission level	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV		cm	deg	1	127.85	32.43	43.50	-11.07	50.90	-18.47	Peak	---	---	2	184.36	35.98	43.50	-7.52	54.97	-18.99	Peak	---	---	3	232.64	36.12	46.00	-9.88	54.58	-18.46	Peak	---	---	4	362.89	35.61	46.00	-10.39	50.30	-14.69	Peak	---	---	5	698.49	37.22	46.00	-8.78	45.48	-8.26	Peak	---	---	6	896.14	41.87	46.00	-4.13	47.42	-5.55	QP	---	---
	Freq.	Emission level	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV		cm	deg																																																																															
1	127.85	32.43	43.50	-11.07	50.90	-18.47	Peak	---	---																																																																														
2	184.36	35.98	43.50	-7.52	54.97	-18.99	Peak	---	---																																																																														
3	232.64	36.12	46.00	-9.88	54.58	-18.46	Peak	---	---																																																																														
4	362.89	35.61	46.00	-10.39	50.30	-14.69	Peak	---	---																																																																														
5	698.49	37.22	46.00	-8.78	45.48	-8.26	Peak	---	---																																																																														
6	896.14	41.87	46.00	-4.13	47.42	-5.55	QP	---	---																																																																														
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p>																																																																																							

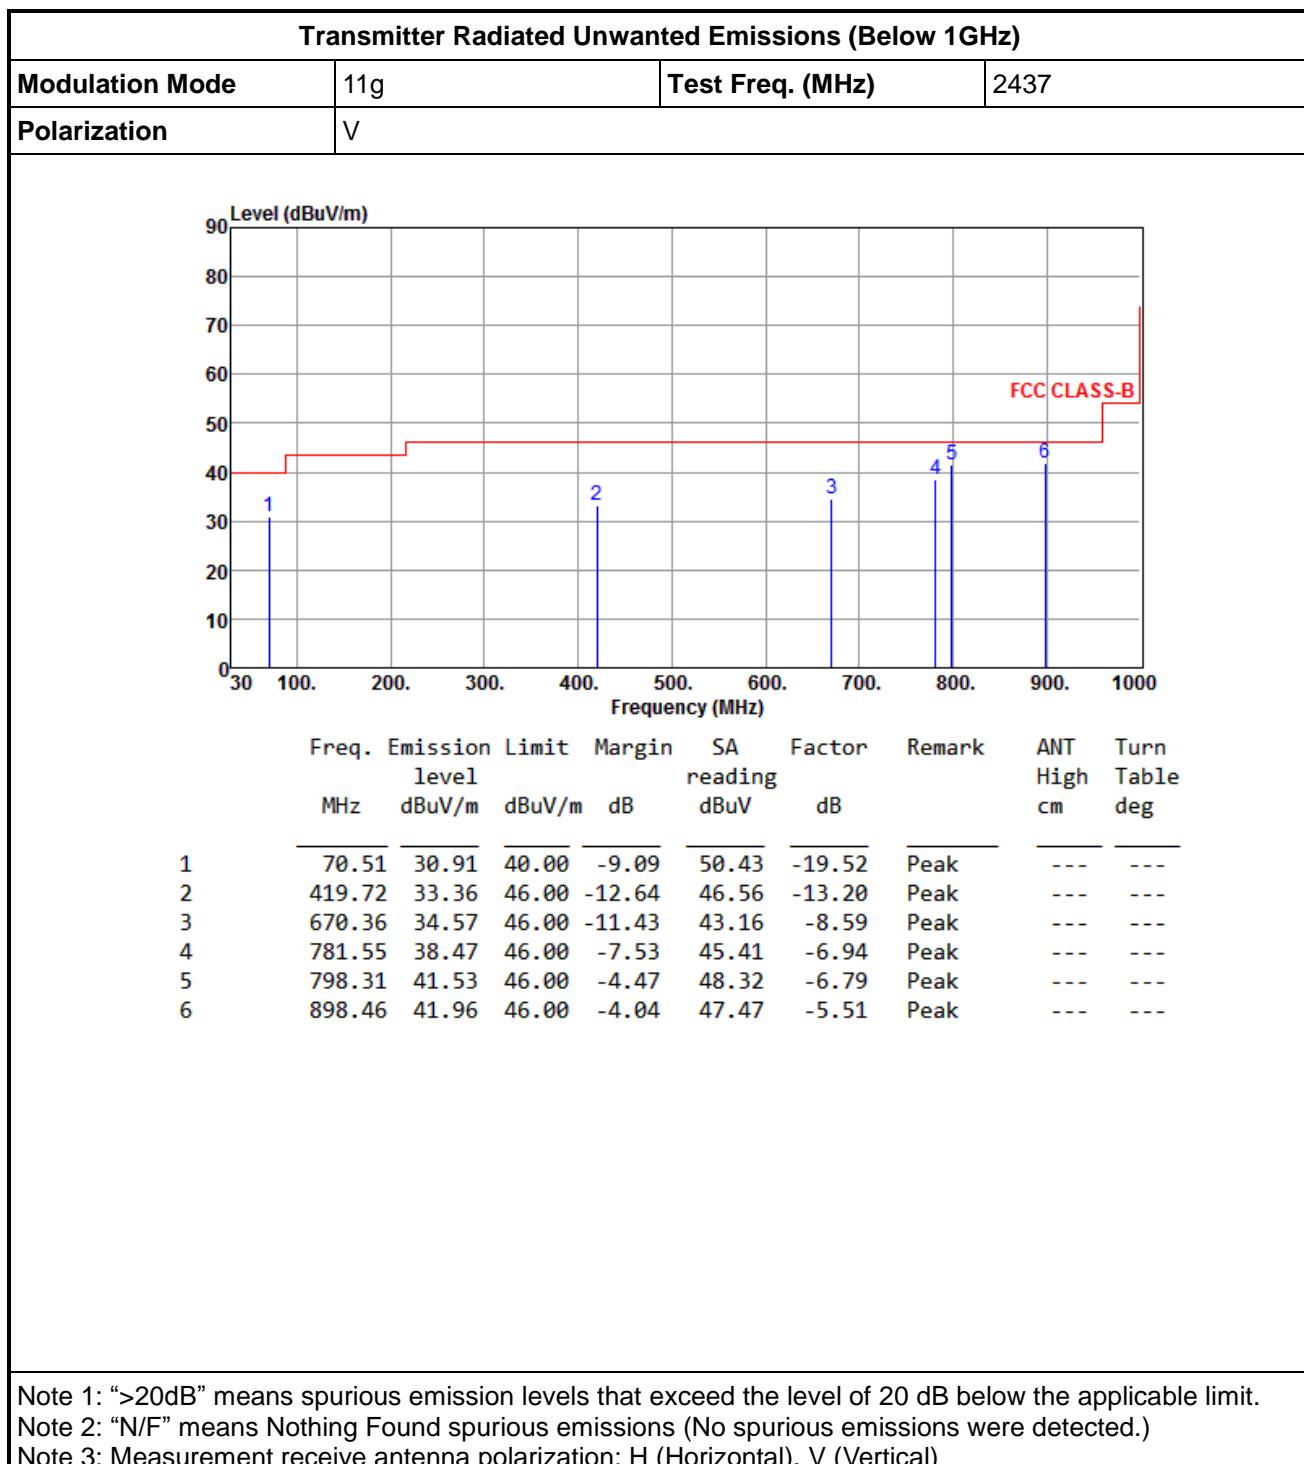



3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

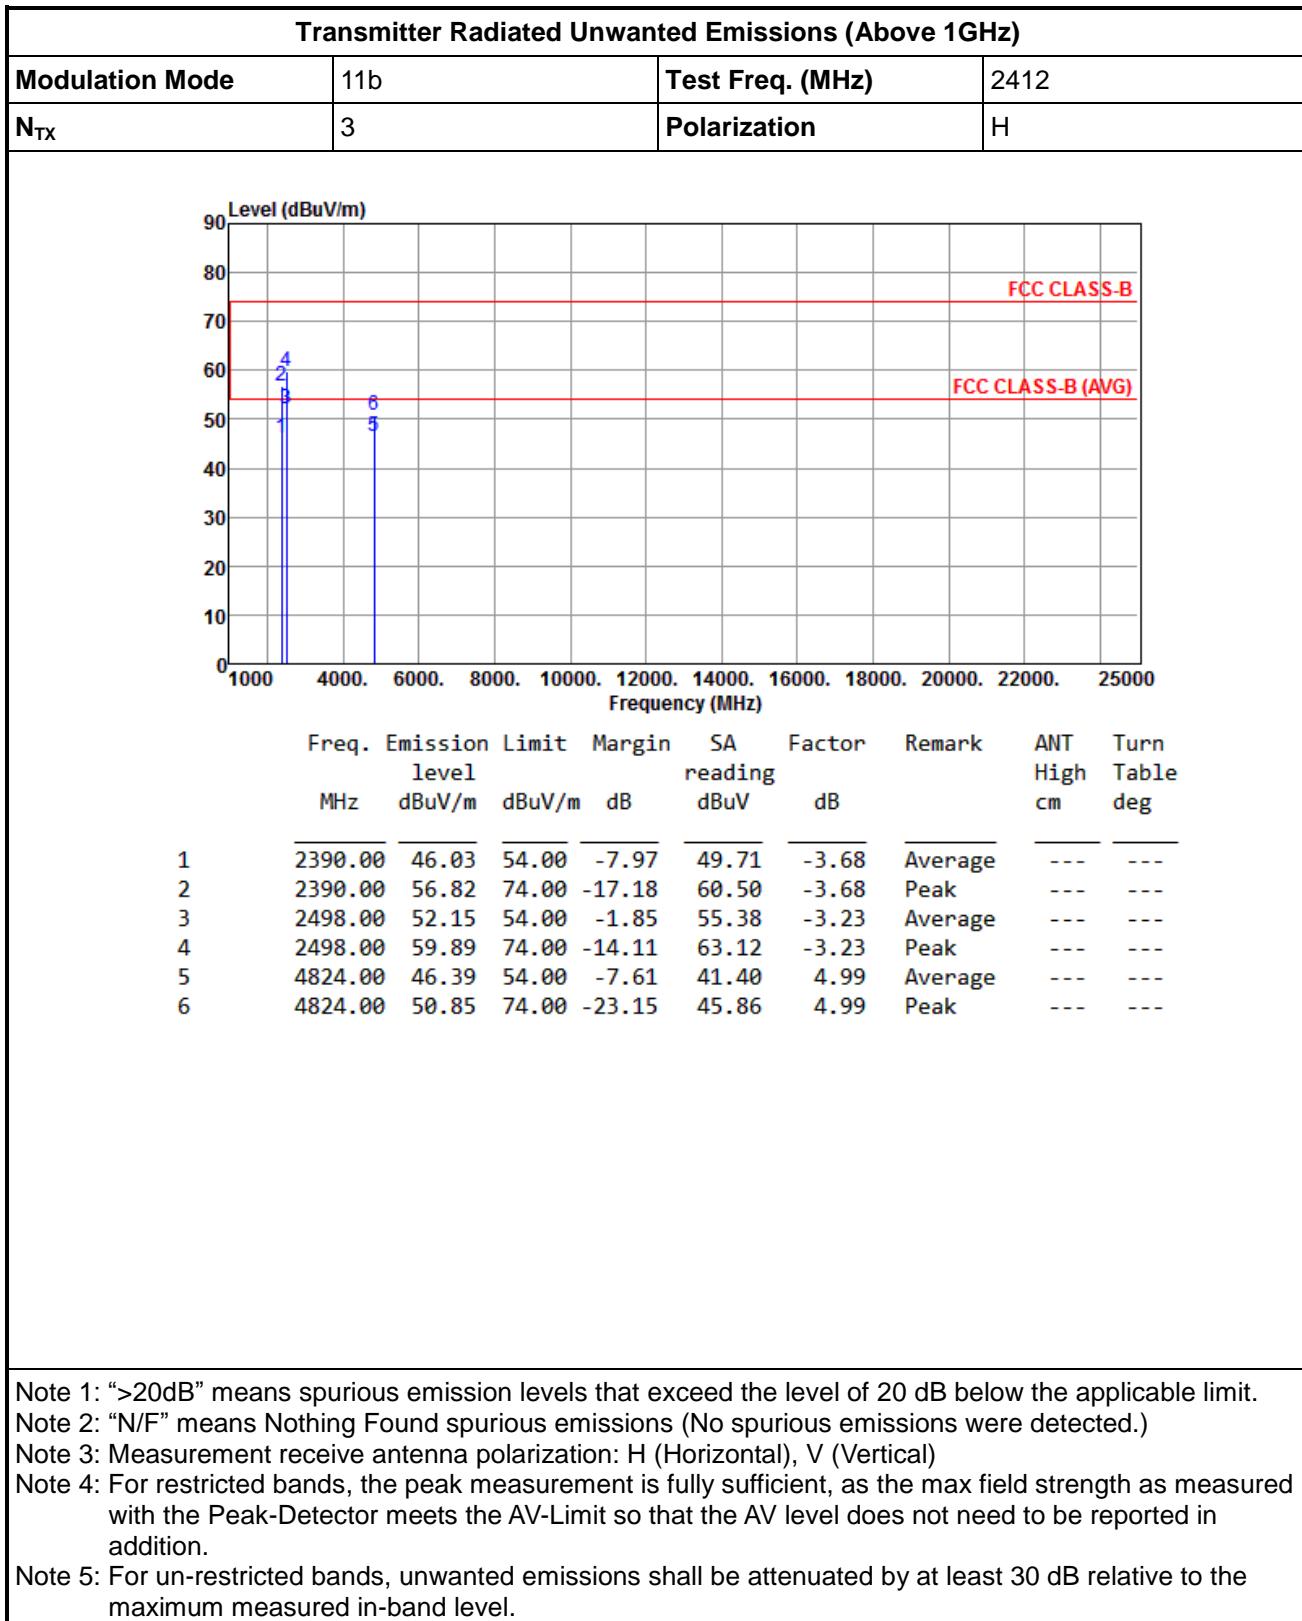



Transmitter Radiated Unwanted Emissions (Above 1GHz)														
Modulation Mode	11b	Test Freq. (MHz)	2412											
N _{TX}	3	Polarization	V											
Level (dB _u V/m)														
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table						
MHz	dB _u V/m	dB _u V/m	dB	dB _u V	dB		cm	deg						
1	2390.00	43.80	54.00	-10.20	47.48	-3.68	Average	---						
2	2390.00	51.25	74.00	-22.75	54.93	-3.68	Peak	---						
3	2498.00	45.91	54.00	-8.09	49.14	-3.23	Average	---						
4	2498.00	55.58	74.00	-18.42	58.81	-3.23	Peak	---						
5	4824.00	45.97	54.00	-8.03	40.98	4.99	Average	---						
6	4824.00	50.39	74.00	-23.61	45.40	4.99	Peak	---						

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11b		Test Freq. (MHz)		2437				
N _{TX}	3		Polarization		H				
<p>Graph showing Transmitter Radiated Unwanted Emissions (Above 1GHz). The Y-axis is Level (dBuV/m) from 0 to 90. The X-axis is Frequency (MHz) from 1000 to 25000. Six data points are plotted: 1 (2352.00 MHz, 44.36 dBuV/m), 2 (2352.00 MHz, 53.05 dBuV/m), 3 (4874.00 MHz, 42.72 dBuV/m), 4 (4874.00 MHz, 49.05 dBuV/m), 5 (7311.00 MHz, 52.98 dBuV/m), 6 (7311.00 MHz, 58.93 dBuV/m). Two horizontal lines are shown: FCC CLASS-B (74 dBuV/m) and FCC CLASS-B (AVG) (55 dBuV/m).</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2352.00	44.36	54.00	-9.64	48.21	-3.85	Average	---	---
2	2352.00	53.05	74.00	-20.95	56.90	-3.85	Peak	---	---
3	4874.00	42.72	54.00	-11.28	37.62	5.10	Average	---	---
4	4874.00	49.05	74.00	-24.95	43.95	5.10	Peak	---	---
5	7311.00	52.98	54.00	-1.02	43.65	9.33	Average	---	---
6	7311.00	58.93	74.00	-15.07	49.60	9.33	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

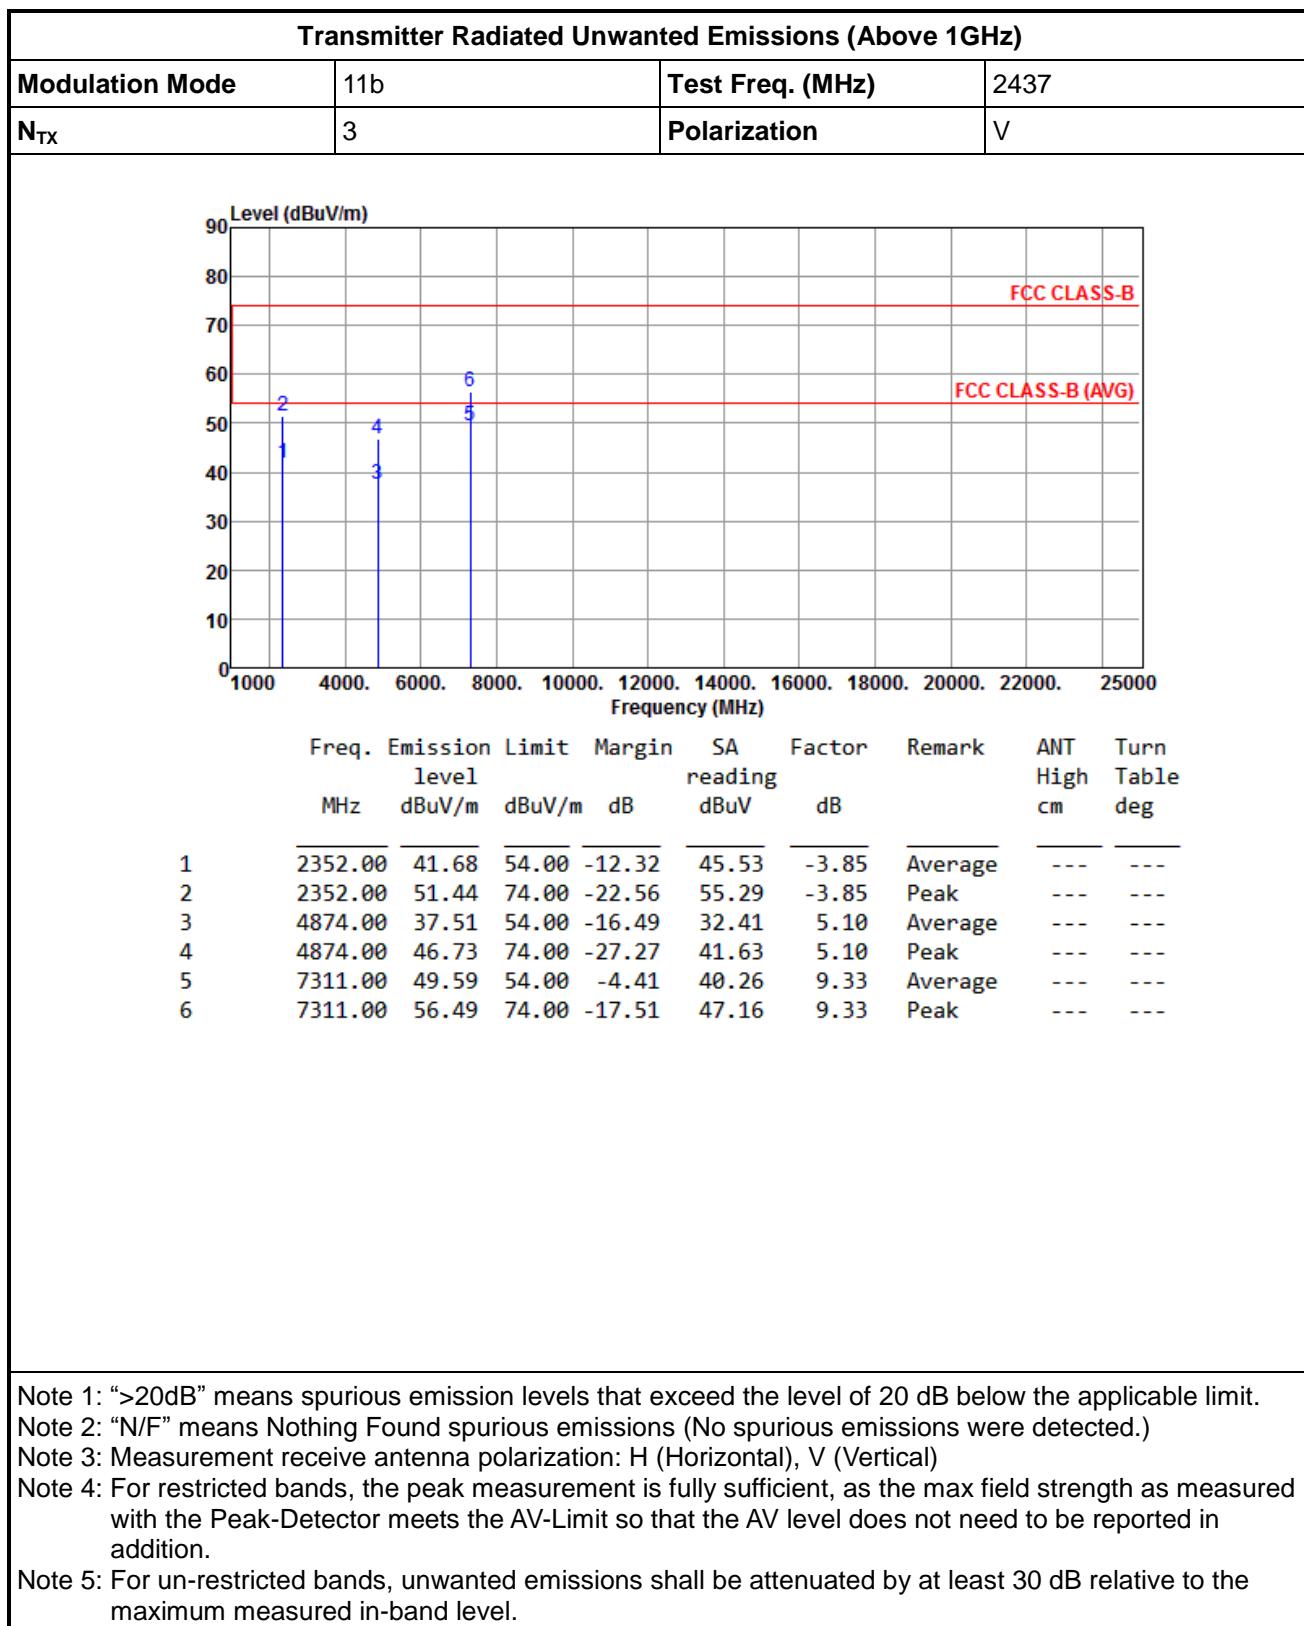



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	11b	Test Freq. (MHz)	2462					
N _{TX}	3	Polarization	H					
<p>Graph showing Transmitter Radiated Unwanted Emissions (Above 1GHz). The Y-axis is Level (dBuV/m) from 0 to 90. The X-axis is Frequency (MHz) from 1000 to 25000. Six data points are plotted: 1 (44.05 dBuV/m at 2483.50 MHz), 2 (57.31 dBuV/m at 2483.50 MHz), 3 (44.80 dBuV/m at 4924.00 MHz), 4 (50.31 dBuV/m at 4924.00 MHz), 5 (52.96 dBuV/m at 7386.00 MHz), and 6 (58.63 dBuV/m at 7386.00 MHz). Two horizontal lines are shown: FCC CLASS-B (72 dBuV/m) and FCC CLASS-B (AVG) (54 dBuV/m).</p>								
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	44.05	54.00	-9.95	47.35	-3.30	Average	---
2	2483.50	57.31	74.00	-16.69	60.61	-3.30	Peak	---
3	4924.00	44.80	54.00	-9.20	39.60	5.20	Average	---
4	4924.00	50.31	74.00	-23.69	45.11	5.20	Peak	---
5	7386.00	52.96	54.00	-1.04	43.57	9.39	Average	---
6	7386.00	58.63	74.00	-15.37	49.24	9.39	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.




Transmitter Radiated Unwanted Emissions (Above 1GHz)														
Modulation Mode	11b	Test Freq. (MHz)	2462											
N _{TX}	3	Polarization	V											
Level (dB _u V/m)														
Freq. MHz	Emission level dB _u V/m	Limit dB _u V/m	Margin dB	SA reading dB _u V	Factor dB	Remark	ANT High cm	Turn Table deg						
1	2483.50	43.91	54.00 -10.09	47.21	-3.30	Average	---	---						
2	2483.50	56.98	74.00 -17.02	60.28	-3.30	Peak	---	---						
3	4924.00	44.65	54.00 -9.35	39.45	5.20	Average	---	---						
4	4924.00	50.18	74.00 -23.82	44.98	5.20	Peak	---	---						
5	7386.00	52.84	54.00 -1.16	43.45	9.39	Average	---	---						
6	7386.00	58.49	74.00 -15.51	49.10	9.39	Peak	---	---						

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

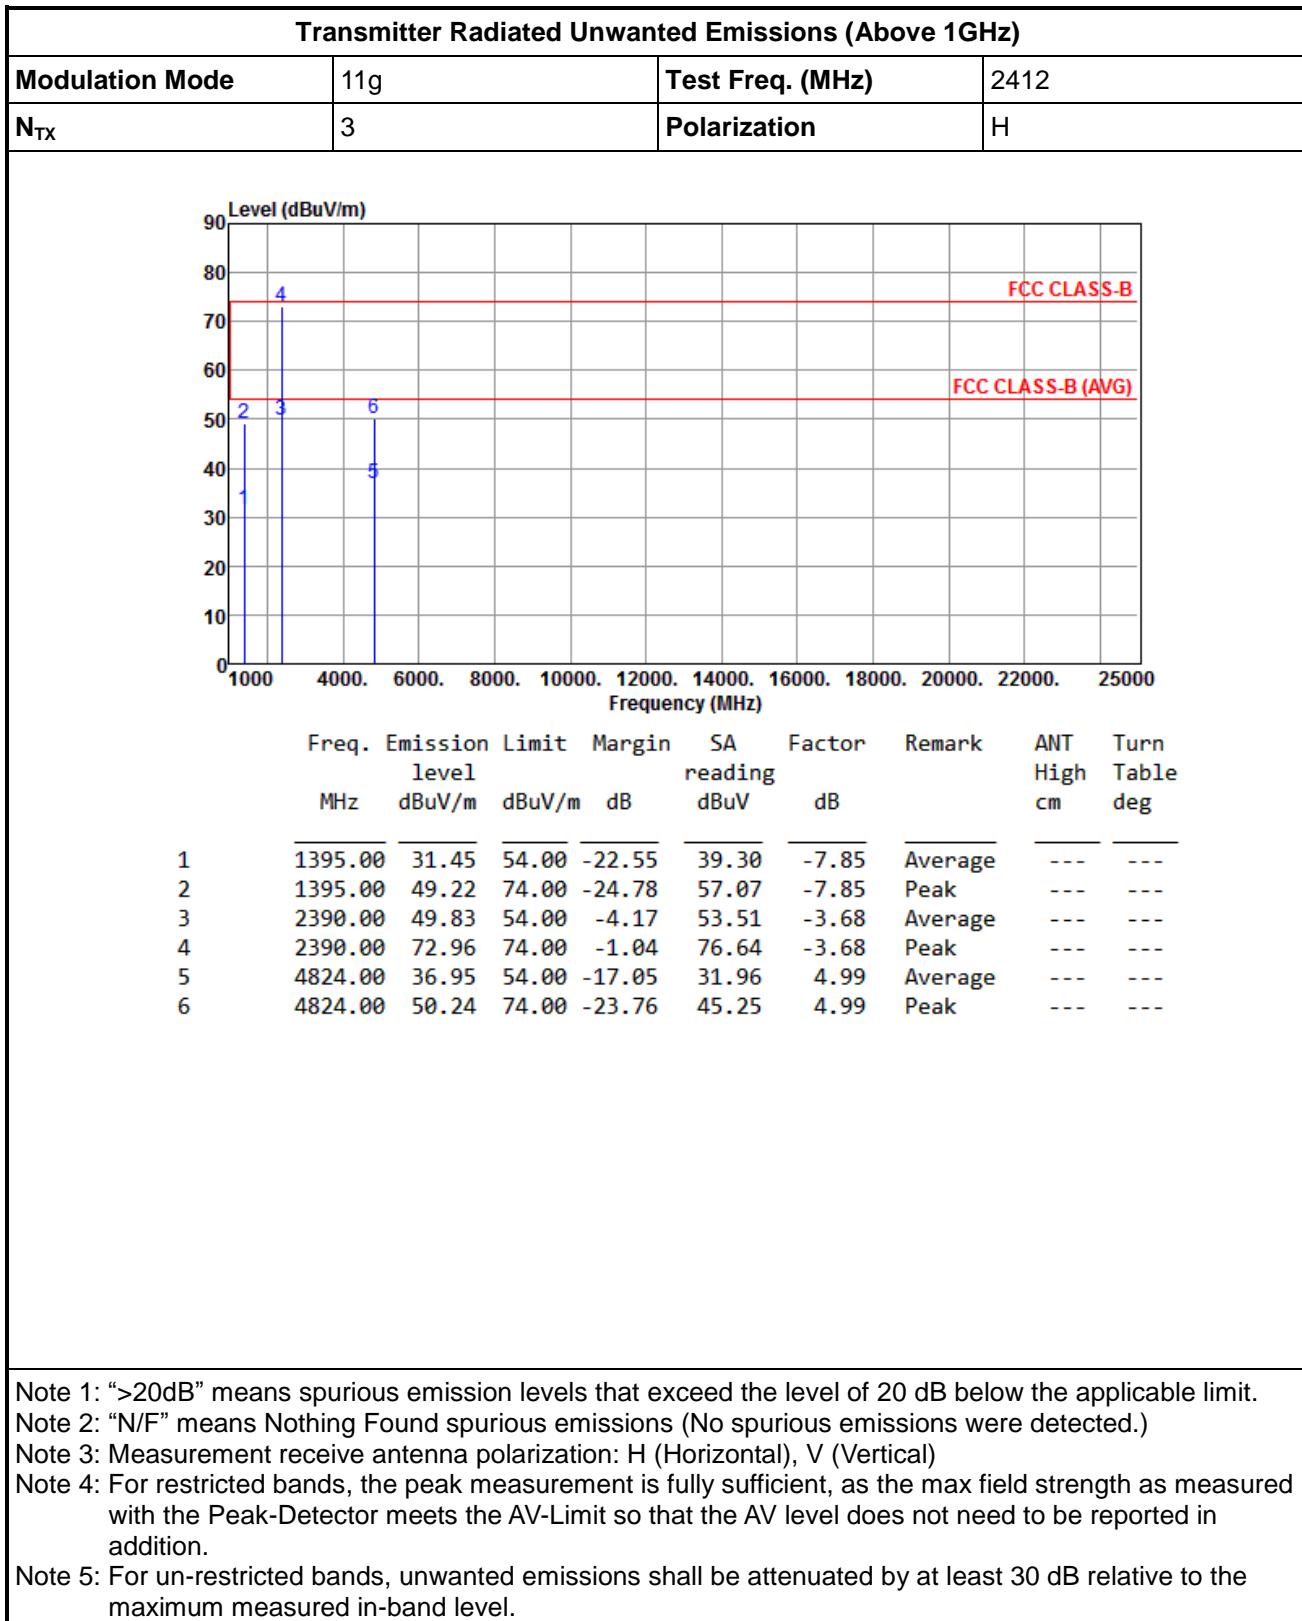



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g		Test Freq. (MHz)		2412				
N _{TX}	3		Polarization		V				
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1395.00	29.87	54.00	-24.13	37.72	-7.85	Average	---	---
2	1395.00	46.98	74.00	-27.02	54.83	-7.85	Peak	---	---
3	2390.00	48.87	54.00	-5.13	52.55	-3.68	Average	---	---
4	2390.00	71.85	74.00	-2.15	75.53	-3.68	Peak	---	---
5	4824.00	36.84	54.00	-17.16	31.85	4.99	Average	---	---
6	4824.00	50.13	74.00	-23.87	45.14	4.99	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

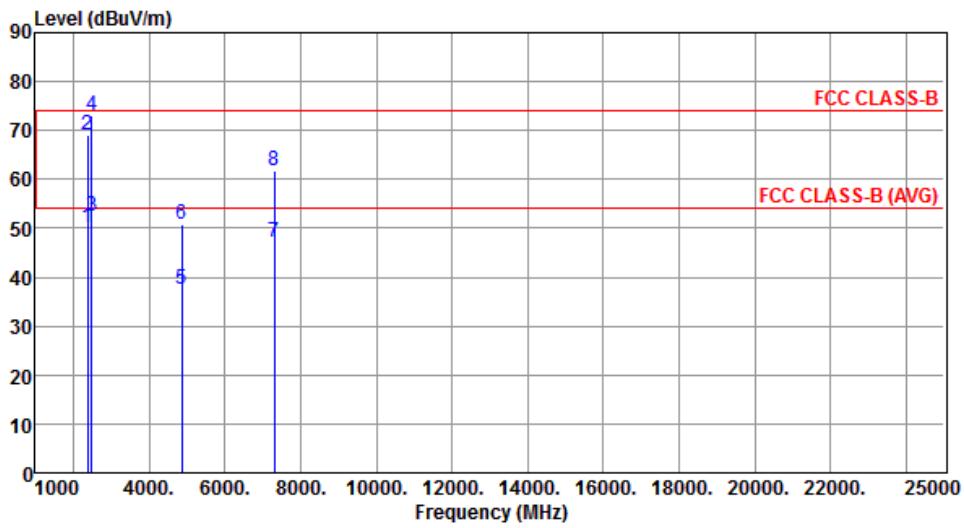

Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																		
Modulation Mode	11g		Test Freq. (MHz)		2437																																																																																													
N _{TX}	3		Polarization		H																																																																																													
																																																																																																		
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>2390.00</td><td>50.15</td><td>54.00</td><td>-3.85</td><td>53.83</td><td>-3.68</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>2</td><td>2390.00</td><td>69.18</td><td>74.00</td><td>-4.82</td><td>72.86</td><td>-3.68</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>2483.50</td><td>52.36</td><td>54.00</td><td>-1.64</td><td>55.66</td><td>-3.30</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>4</td><td>2483.50</td><td>72.95</td><td>74.00</td><td>-1.05</td><td>76.25</td><td>-3.30</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>4874.00</td><td>37.45</td><td>54.00</td><td>-16.55</td><td>32.35</td><td>5.10</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>6</td><td>4874.00</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>45.82</td><td>5.10</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>7</td><td>7311.00</td><td>47.24</td><td>54.00</td><td>-6.76</td><td>37.91</td><td>9.33</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>8</td><td>7311.00</td><td>61.85</td><td>74.00</td><td>-12.15</td><td>52.52</td><td>9.33</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>										Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	2390.00	50.15	54.00	-3.85	53.83	-3.68	Average	---	---	2	2390.00	69.18	74.00	-4.82	72.86	-3.68	Peak	---	---	3	2483.50	52.36	54.00	-1.64	55.66	-3.30	Average	---	---	4	2483.50	72.95	74.00	-1.05	76.25	-3.30	Peak	---	---	5	4874.00	37.45	54.00	-16.55	32.35	5.10	Average	---	---	6	4874.00	50.92	74.00	-23.08	45.82	5.10	Peak	---	---	7	7311.00	47.24	54.00	-6.76	37.91	9.33	Average	---	---	8	7311.00	61.85	74.00	-12.15	52.52	9.33	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																																									
1	2390.00	50.15	54.00	-3.85	53.83	-3.68	Average	---	---																																																																																									
2	2390.00	69.18	74.00	-4.82	72.86	-3.68	Peak	---	---																																																																																									
3	2483.50	52.36	54.00	-1.64	55.66	-3.30	Average	---	---																																																																																									
4	2483.50	72.95	74.00	-1.05	76.25	-3.30	Peak	---	---																																																																																									
5	4874.00	37.45	54.00	-16.55	32.35	5.10	Average	---	---																																																																																									
6	4874.00	50.92	74.00	-23.08	45.82	5.10	Peak	---	---																																																																																									
7	7311.00	47.24	54.00	-6.76	37.91	9.33	Average	---	---																																																																																									
8	7311.00	61.85	74.00	-12.15	52.52	9.33	Peak	---	---																																																																																									
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</p> <p>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.</p>																																																																																																		



Transmitter Radiated Unwanted Emissions (Above 1GHz)														
Modulation Mode	11g	Test Freq. (MHz)	2437											
N _{TX}	3	Polarization	V											
Level (dB _u V/m)														
Freq. (MHz)	Emission level (dB _u V/m)	Limit (dB _u V/m)	Margin (dB)	SA reading (dB _u V)	Factor	Remark	ANT High (cm)	Turn Table deg						
1	2390.00	49.35	54.00	-4.65	53.03	-3.68	Average	---						
2	2390.00	68.33	74.00	-5.67	72.01	-3.68	Peak	---						
3	2483.50	51.64	54.00	-2.36	54.94	-3.30	Average	---						
4	2483.50	72.86	74.00	-1.14	76.16	-3.30	Peak	---						
5	4874.00	38.95	54.00	-15.05	33.85	5.10	Average	---						
6	4874.00	53.66	74.00	-20.34	48.56	5.10	Peak	---						
7	7311.00	45.77	54.00	-8.23	36.44	9.33	Average	---						
8	7311.00	60.09	74.00	-13.91	50.76	9.33	Peak	---						

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g		Test Freq. (MHz)		2462				
N _{TX}	3		Polarization		H				
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	51.89	54.00	-2.11	55.19	-3.30	Average	---	---
2	2483.50	72.97	74.00	-1.03	76.27	-3.30	Peak	---	---
3	4924.00	37.65	54.00	-16.35	32.45	5.20	Average	---	---
4	4924.00	50.84	74.00	-23.16	45.64	5.20	Peak	---	---
5	7386.00	41.53	54.00	-12.47	32.14	9.39	Average	---	---
6	7386.00	55.46	74.00	-18.54	46.07	9.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g		Test Freq. (MHz)		2462				
N _{TX}	3		Polarization		V				
<p>Graph showing Transmitter Radiated Unwanted Emissions (Above 1GHz). The Y-axis is Level (dBuV/m) from 0 to 90. The X-axis is Frequency (MHz) from 1000 to 25000. Six data points are plotted: 1 (2483.50 MHz, 48.96 dBuV/m), 2 (2483.50 MHz, 71.94 dBuV/m), 3 (4924.00 MHz, 37.41 dBuV/m), 4 (4924.00 MHz, 50.63 dBuV/m), 5 (7386.00 MHz, 41.65 dBuV/m), 6 (7386.00 MHz, 55.78 dBuV/m). Two horizontal lines are shown: FCC CLASS-B (72 dB) and FCC CLASS-B (AVG) (54 dB).</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	48.96	54.00	-5.04	52.26	-3.30	Average	---	---
2	2483.50	71.94	74.00	-2.06	75.24	-3.30	Peak	---	---
3	4924.00	37.41	54.00	-16.59	32.21	5.20	Average	---	---
4	4924.00	50.63	74.00	-23.37	45.43	5.20	Peak	---	---
5	7386.00	41.65	54.00	-12.35	32.26	9.39	Average	---	---
6	7386.00	55.78	74.00	-18.22	46.39	9.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

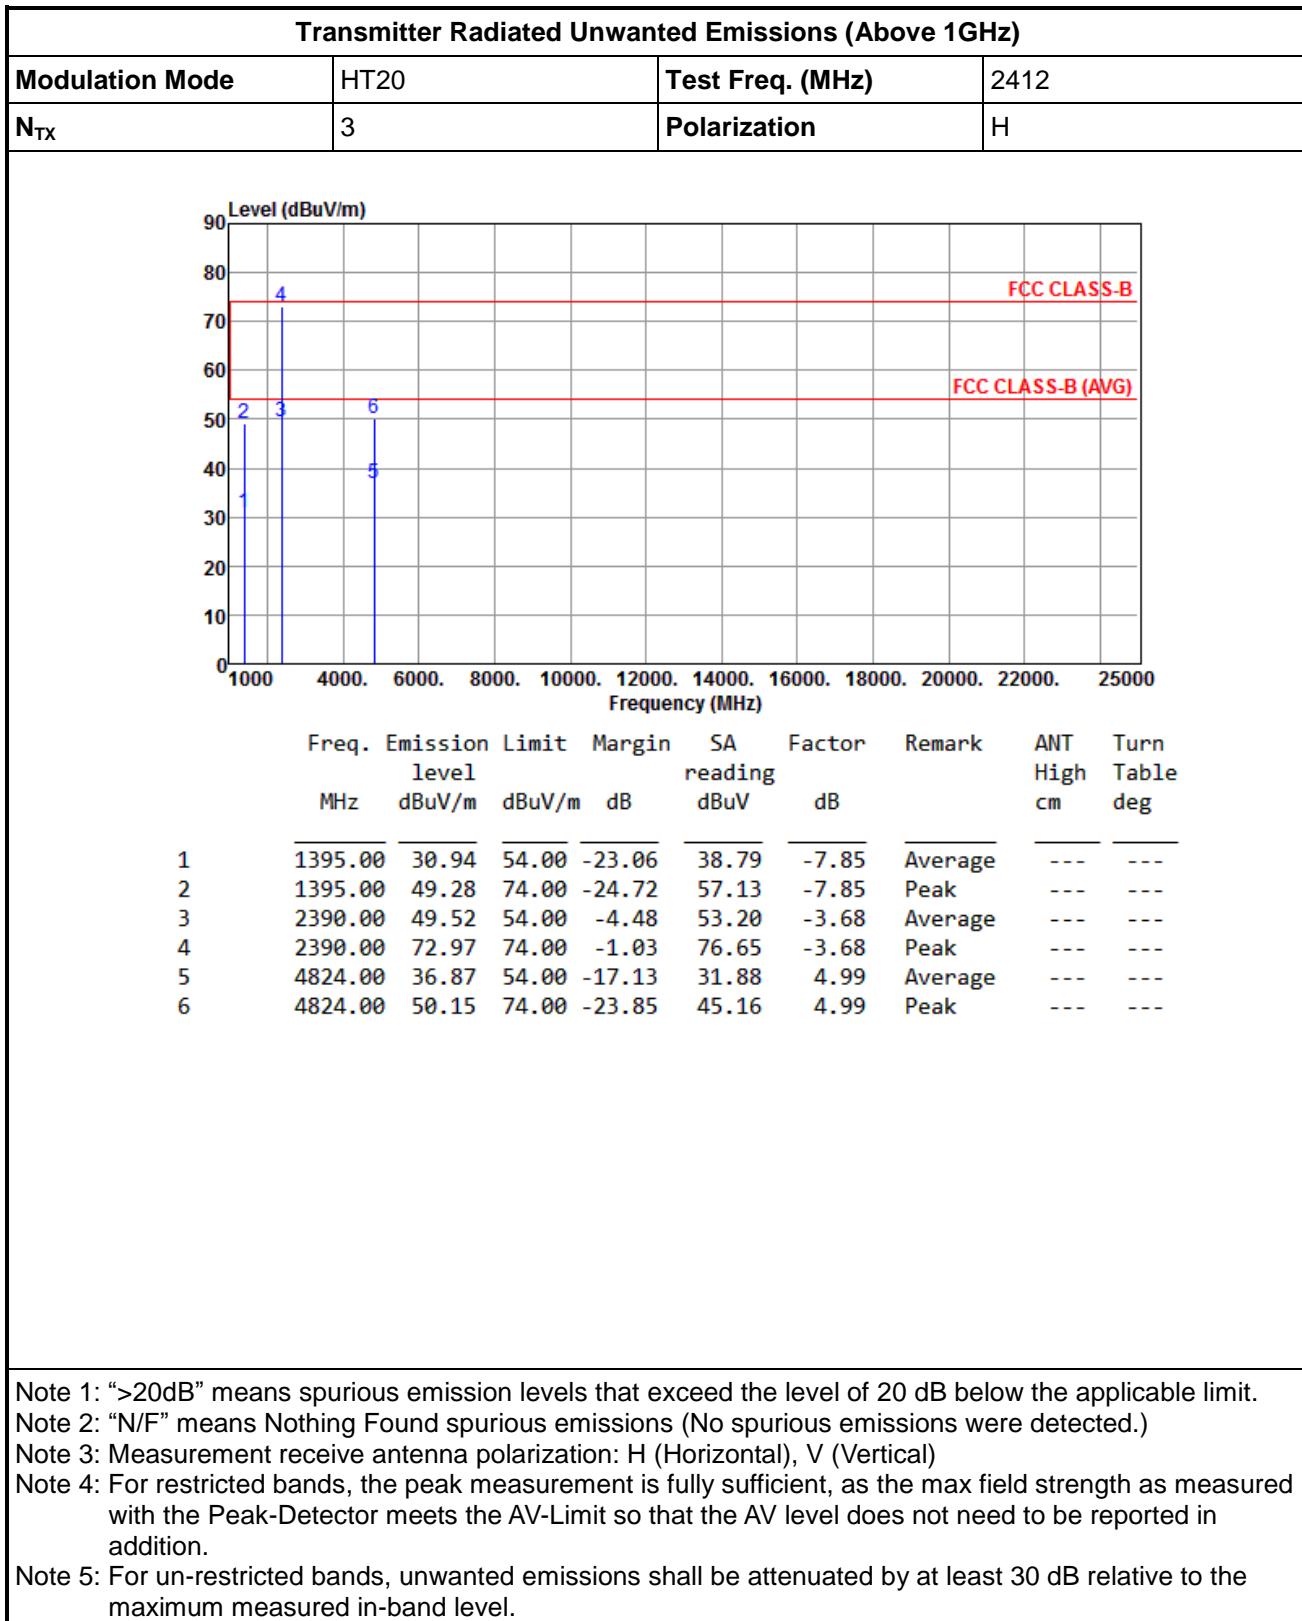



Transmitter Radiated Unwanted Emissions (Above 1GHz)														
Modulation Mode	HT20	Test Freq. (MHz)	2412											
N _{TX}	3	Polarization	V											
Level (dB _u V/m)														
Freq. MHz	Emission level dB _u V/m	Limit dB _u V/m	Margin dB	SA reading dB _u V	Factor dB	Remark	ANT High cm	Turn Table deg						
1	1395.00	29.94	54.00	-24.06	37.79	-7.85	Average	---						
2	1395.00	47.16	74.00	-26.84	55.01	-7.85	Peak	---						
3	2390.00	49.35	54.00	-4.65	53.03	-3.68	Average	---						
4	2390.00	72.81	74.00	-1.19	76.49	-3.68	Peak	---						
5	4824.00	36.91	54.00	-17.09	31.92	4.99	Average	---						
6	4824.00	50.25	74.00	-23.75	45.26	4.99	Peak	---						

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)														
Modulation Mode	HT20	Test Freq. (MHz)	2437											
N _{TX}	3	Polarization	H											
Level (dB _u V/m)														
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg						
1	2390.00	48.21	54.00	-5.79	51.89	-3.68	Average	---						
2	2390.00	65.74	74.00	-8.26	69.42	-3.68	Peak	---						
3	2483.50	51.16	54.00	-2.84	54.46	-3.30	Average	---						
4	2483.50	72.96	74.00	-1.04	76.26	-3.30	Peak	---						
5	4874.00	37.24	54.00	-16.76	32.14	5.10	Average	---						
6	4874.00	50.76	74.00	-23.24	45.66	5.10	Peak	---						
7	7311.00	47.18	54.00	-6.82	37.85	9.33	Average	---						
8	7311.00	61.69	74.00	-12.31	52.36	9.33	Peak	---						

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)														
Modulation Mode	HT20	Test Freq. (MHz)	2437											
N _{TX}	3	Polarization	V											
Level (dB _u V/m)														
Freq. Emission Margin SA Factor Remark ANT Turn MHz level limit reading reading deg dB _u V/m dB _u V/m dB dB														
1	2390.00	49.02	54.00	-4.98	52.70	-3.68	Average	---	---					
2	2390.00	67.69	74.00	-6.31	71.37	-3.68	Peak	---	---					
3	2483.50	51.75	54.00	-2.25	55.05	-3.30	Average	---	---					
4	2483.50	72.88	74.00	-1.12	76.18	-3.30	Peak	---	---					
5	4874.00	39.15	54.00	-14.85	34.05	5.10	Average	---	---					
6	4874.00	53.64	74.00	-20.36	48.54	5.10	Peak	---	---					
7	7311.00	45.62	54.00	-8.38	36.29	9.33	Average	---	---					
8	7311.00	59.81	74.00	-14.19	50.48	9.33	Peak	---	---					

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT20		Test Freq. (MHz)		2462				
N _{TX}	3		Polarization		H				
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.37	54.00	-1.63	55.67	-3.30	Average	---	---
2	2483.50	72.94	74.00	-1.06	76.24	-3.30	Peak	---	---
3	4924.00	37.45	54.00	-16.55	32.25	5.20	Average	---	---
4	4924.00	50.63	74.00	-23.37	45.43	5.20	Peak	---	---
5	7386.00	41.49	54.00	-12.51	32.10	9.39	Average	---	---
6	7386.00	55.38	74.00	-18.62	45.99	9.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT20		Test Freq. (MHz)		2462				
N _{TX}	3		Polarization		V				
<p>Graph showing Transmitter Radiated Unwanted Emissions (Above 1GHz). The Y-axis is Level (dBuV/m) from 0 to 90. The X-axis is Frequency (MHz) from 1000 to 25000. Six data points are plotted: 1 (2483.50 MHz, 47.69 dBuV/m), 2 (2483.50 MHz, 72.88 dBuV/m), 3 (4924.00 MHz, 37.29 dBuV/m), 4 (4924.00 MHz, 50.44 dBuV/m), 5 (7386.00 MHz, 41.53 dBuV/m), 6 (7386.00 MHz, 55.62 dBuV/m). Two horizontal lines are shown: FCC CLASS-B (72 dBuV/m) and FCC CLASS-B (AVG) (54 dBuV/m).</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	47.69	54.00	-6.31	50.99	-3.30	Average	---	---
2	2483.50	72.88	74.00	-1.12	76.18	-3.30	Peak	---	---
3	4924.00	37.29	54.00	-16.71	32.09	5.20	Average	---	---
4	4924.00	50.44	74.00	-23.56	45.24	5.20	Peak	---	---
5	7386.00	41.53	54.00	-12.47	32.14	9.39	Average	---	---
6	7386.00	55.62	74.00	-18.38	46.23	9.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.




3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

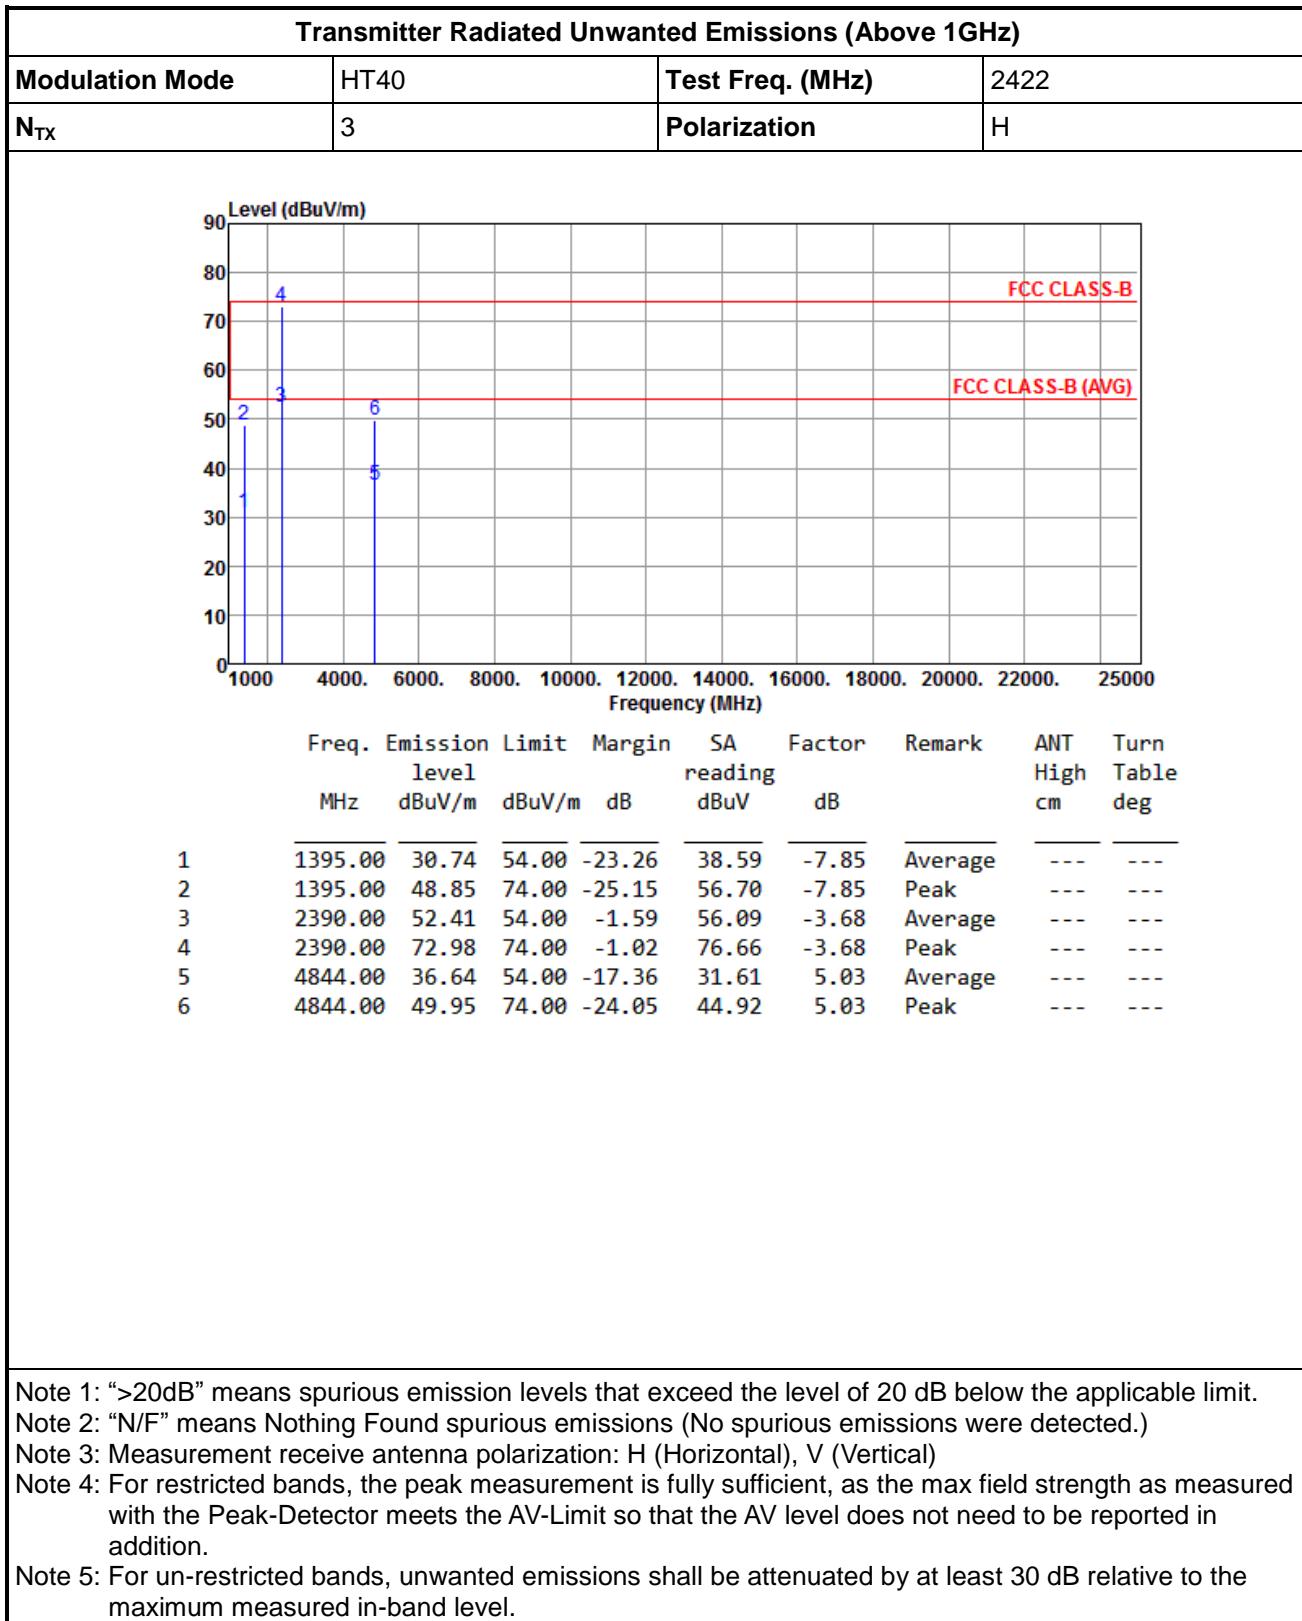

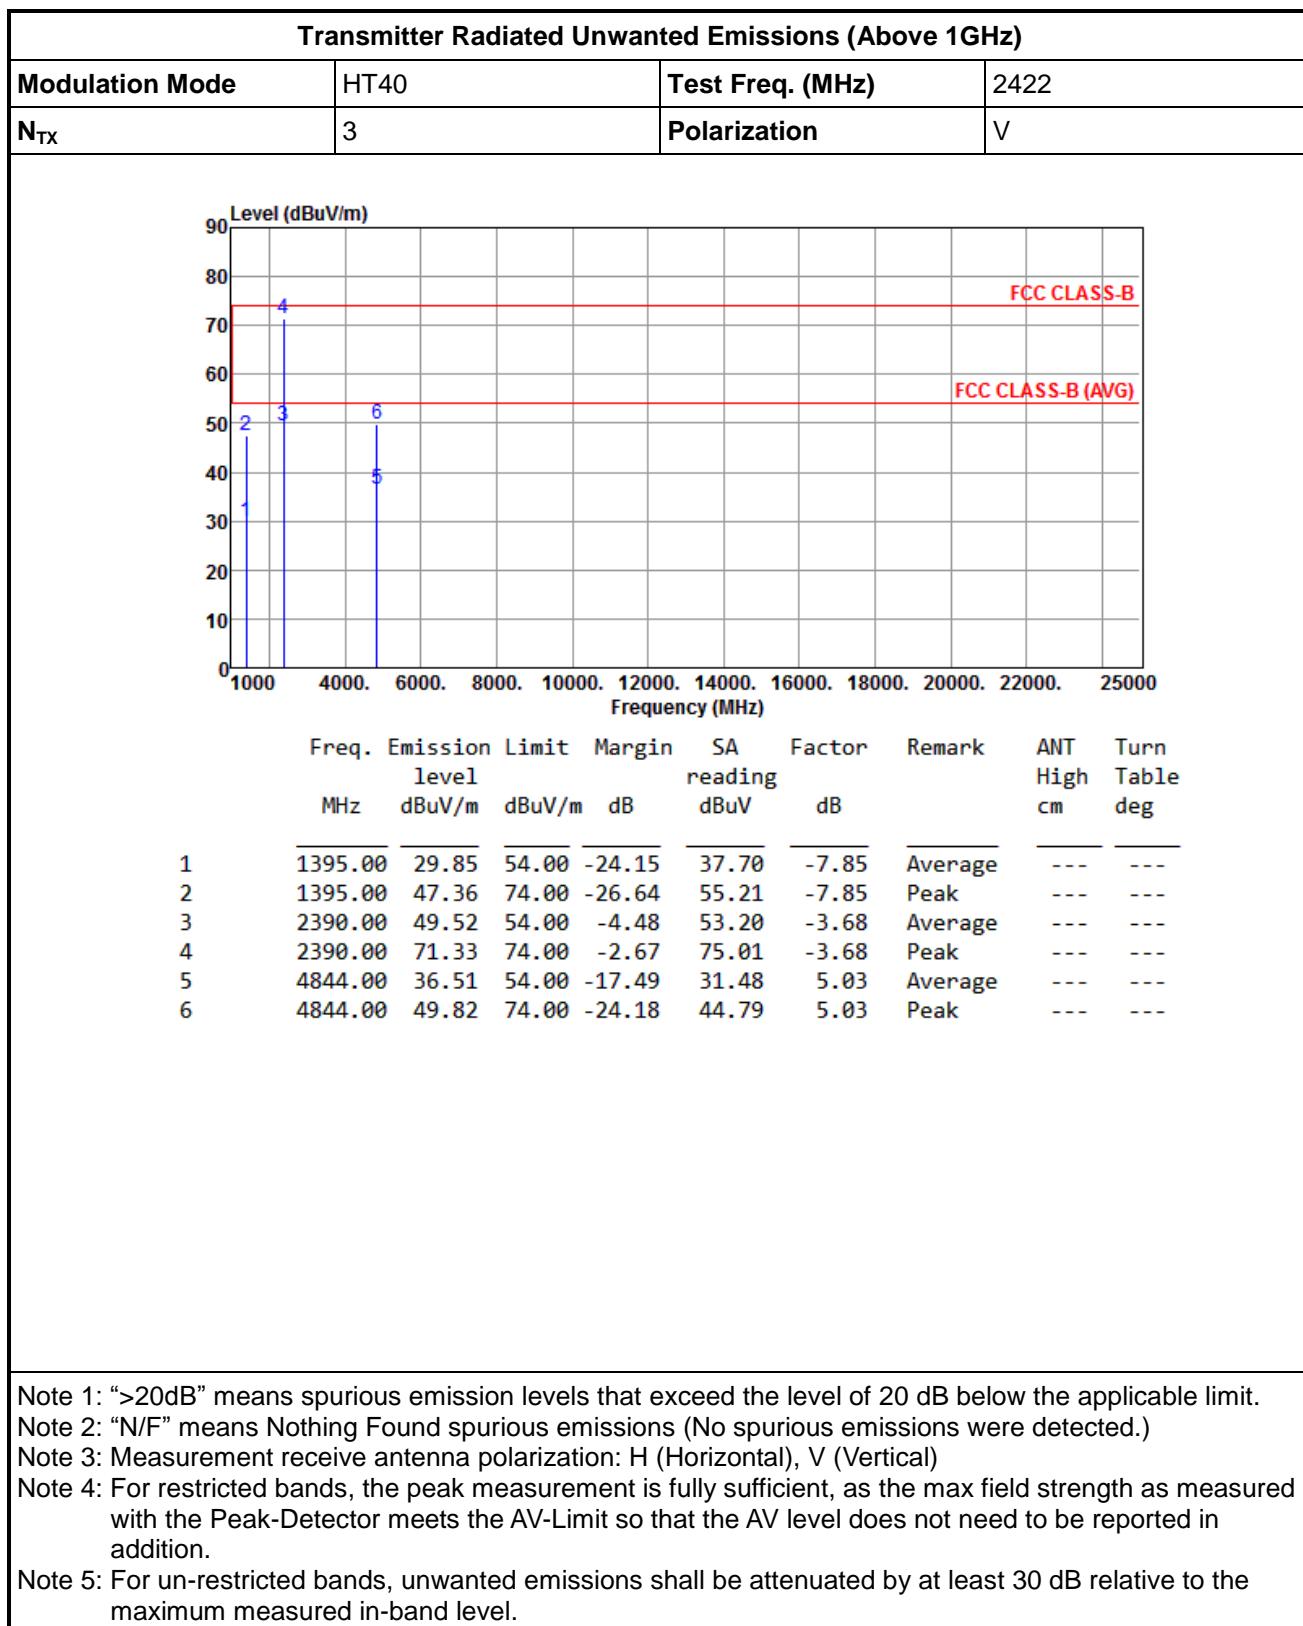



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT40	Test Freq. (MHz)	2437
N _{TX}	3	Polarization	H

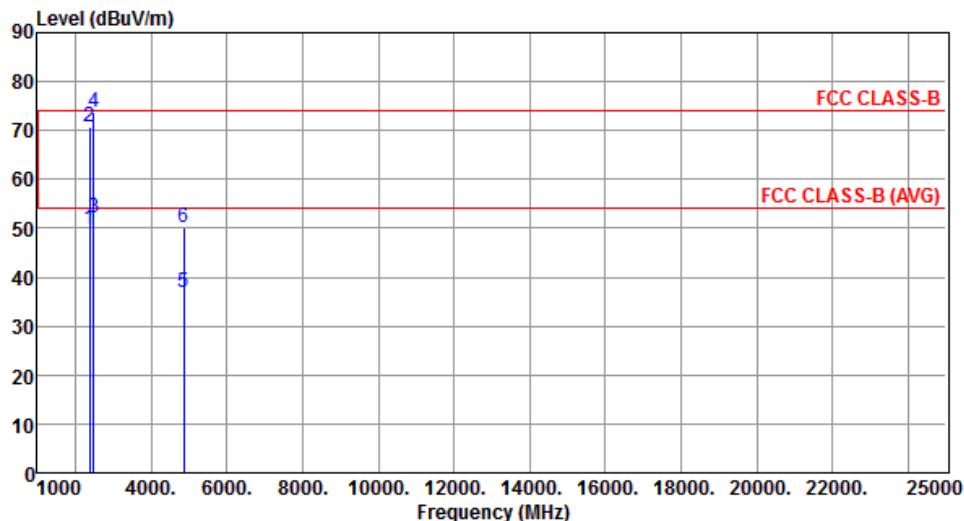

	Freq. Emission		Limit	Margin	SA	Factor	Remark	ANT	Turn
	level	MHz	dBuV/m	dBuV/m	dB	reading	dBuV	dB	High
								cm	deg
1	2390.00	49.65	54.00	-4.35	53.33	-3.68	Average	---	---
2	2390.00	70.90	74.00	-3.10	74.58	-3.68	Peak	---	---
3	2483.50	52.03	54.00	-1.97	55.33	-3.30	Average	---	---
4	2483.50	73.68	74.00	-0.32	76.98	-3.30	Peak	---	---
5	4874.00	36.98	54.00	-17.02	31.88	5.10	Average	---	---
6	4874.00	50.24	74.00	-23.76	45.14	5.10	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

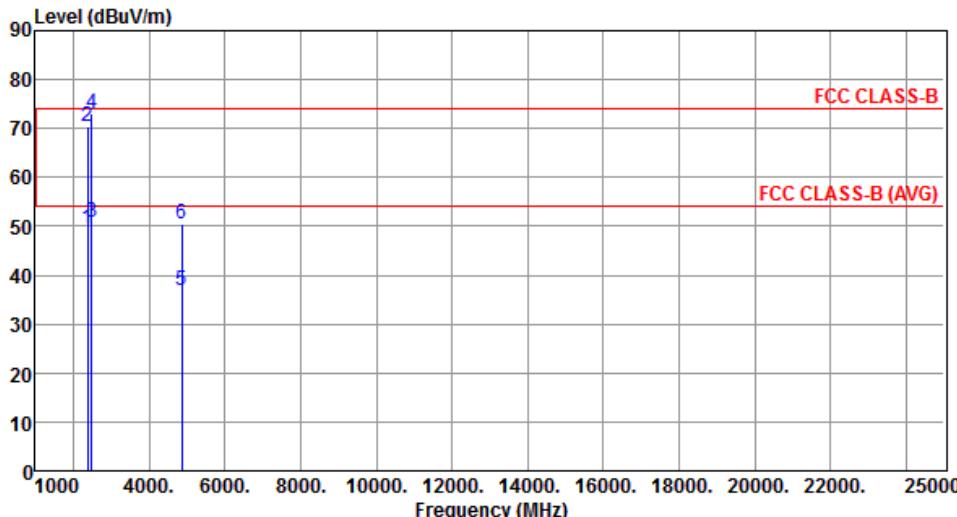

Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																														
Modulation Mode	HT40		Test Freq. (MHz)		2437																																																																									
N _{TX}	3		Polarization		V																																																																									
																																																																														
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>2390.00</td><td>49.39</td><td>54.00</td><td>-4.61</td><td>53.07</td><td>-3.68</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>2</td><td>2390.00</td><td>70.49</td><td>74.00</td><td>-3.51</td><td>74.17</td><td>-3.68</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>2483.50</td><td>50.92</td><td>54.00</td><td>-3.08</td><td>54.22</td><td>-3.30</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>4</td><td>2483.50</td><td>73.06</td><td>74.00</td><td>-0.94</td><td>76.36</td><td>-3.30</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>4874.00</td><td>36.81</td><td>54.00</td><td>-17.19</td><td>31.71</td><td>5.10</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>6</td><td>4874.00</td><td>50.49</td><td>74.00</td><td>-23.51</td><td>45.39</td><td>5.10</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>										Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	2390.00	49.39	54.00	-4.61	53.07	-3.68	Average	---	---	2	2390.00	70.49	74.00	-3.51	74.17	-3.68	Peak	---	---	3	2483.50	50.92	54.00	-3.08	54.22	-3.30	Average	---	---	4	2483.50	73.06	74.00	-0.94	76.36	-3.30	Peak	---	---	5	4874.00	36.81	54.00	-17.19	31.71	5.10	Average	---	---	6	4874.00	50.49	74.00	-23.51	45.39	5.10	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																					
1	2390.00	49.39	54.00	-4.61	53.07	-3.68	Average	---	---																																																																					
2	2390.00	70.49	74.00	-3.51	74.17	-3.68	Peak	---	---																																																																					
3	2483.50	50.92	54.00	-3.08	54.22	-3.30	Average	---	---																																																																					
4	2483.50	73.06	74.00	-0.94	76.36	-3.30	Peak	---	---																																																																					
5	4874.00	36.81	54.00	-17.19	31.71	5.10	Average	---	---																																																																					
6	4874.00	50.49	74.00	-23.51	45.39	5.10	Peak	---	---																																																																					
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</p> <p>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.</p>																																																																														



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT40		Test Freq. (MHz)		2452			
N _{TX}	3		Polarization		H			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1395.00	29.88	54.00	-24.12	37.73	-7.85	Average	---
2	1395.00	47.41	74.00	-26.59	55.26	-7.85	Peak	---
3	2483.50	50.92	54.00	-3.08	54.22	-3.30	Average	---
4	2483.50	72.99	74.00	-1.01	76.29	-3.30	Peak	---
5	4904.00	36.51	54.00	-17.49	31.35	5.16	Average	---
6	4904.00	49.88	74.00	-24.12	44.72	5.16	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT40	Test Freq. (MHz)	2452					
N _{TX}	3	Polarization	V					
Level (dB_uV/m)								
1	2	3	4	5	6	7	8	
Frequency (MHz)								
1000	2000	3000	4000	5000	6000	7000	8000	
10000	12000	14000	16000	18000	20000	22000	25000	
FCC CLASS-B								
FCC CLASS-B (AVG)								
Freq. (MHz)	Emission level (dB _u V/m)	Limit (dB _u V/m)	Margin (dB)	SA reading (dB _u V)	Factor (dB)	Remark	ANT High (cm)	Turn Table deg
1 1395.00	30.79	54.00	-23.21	38.64	-7.85	Average	---	---
2 1395.00	48.87	74.00	-25.13	56.72	-7.85	Peak	---	---
3 2483.50	50.64	54.00	-3.36	53.94	-3.30	Average	---	---
4 2483.50	72.47	74.00	-1.53	75.77	-3.30	Peak	---	---
5 4904.00	36.25	54.00	-17.75	31.09	5.16	Average	---	---
6 4904.00	49.62	74.00	-24.38	44.46	5.16	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



4 Test Equipment and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Feb. 21, 2014				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 24, 2013	Apr. 23, 2014
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emissions				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	May 02, 2014				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Jan. 25, 2014	Jan. 24, 2015
Receiver	R&S	ESR3	101658	Jan. 10, 2014	Jan. 09, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 02, 2014	Jan. 01, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 13, 2014	Feb. 12, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Preamplifier	Burgeon	BPA-530	SN:100219	Nov. 28, 2013	Nov. 27, 2014
Preamplifier	Agilent	83017A	MY39501308	Dec. 16, 2013	Dec. 15, 2014
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 16, 2013	Dec. 15, 2014
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 16, 2013	Dec. 15, 2014
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 16, 2013	Dec. 15, 2014
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Note: Calibration Interval of instruments listed above is two year.					



Test Item	RF Conducted				
Test Site	TH01-HY				
Tested Date	Nov. 14, 2014				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101013	Jan. 25, 2014	Jan. 24, 2015
Signal Generator	R&S	SMR40	100116	Jul. 31, 2014	Jul. 30, 2015
Power Sensor	Anritsu	MA2411B	0917017	Jan. 28, 2014	Jan. 27, 2015
Power Meter	Anritsu	ML2495A	0949003	Jan. 28, 2014	Jan. 27, 2015
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					