




Z-Wave® High-power Outdoor Module

Model: ZW4004 | 45734


CONTACT RATINGS:

120-277 V ac, 40 A Resistive Single Phase
120-277 V ac, 20A Ballast (Inductive)
125 V ac, 15 A Tungsten
250 V ac, 5 A Tungsten
1HP@120VAC,
2HP @ 240VAC

120VAC Wiring Diagram

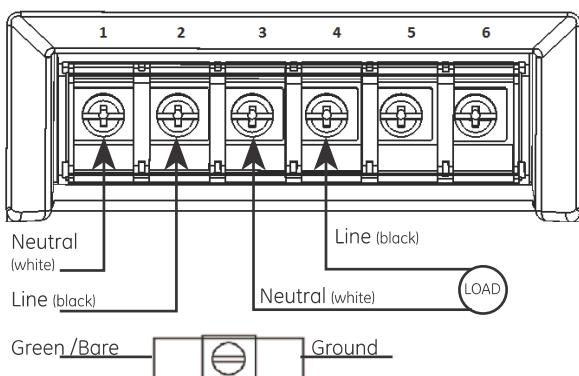

240VAC Wiring Diagram

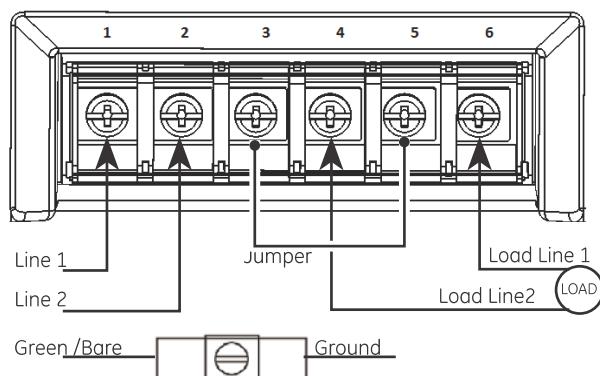

- Recommended installation by licensed electrician.
- High Voltage (There may be more than one source of supply) disconnect all power sources before servicing.
- Risk of electric shock – All terminals are live.
- Use copper wire only.
- Close the cover after setting.
- Tighten connections to 25 lbf-in.
- Use correct gauge wire (8-14 AWG) based on local electrical code of at least 105C rating.
- Approved for outdoor use.
- Wire strip length $\frac{1}{2}$ "
- GROUNDING: National Electrical Code requires that grounding must be continuous and in proper electrical contact in all grounding conductors, metallic conduits and grounding terminals.



This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Z-Wave is a registered US trademark of Sigma Designs

45734 VERSION 1

07/11/13

WWW.JASCOPRODUCTS.COM

YYWW

GE5366-41K2

