

INTELICIS CORPORATION

ENTERPRISE DUAL RADIO ACCESS POINT / BRIDGE

Model : CEDAR 880AG

30 October 2007

Report No.: SL07082702-INT-002(15.247)
(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

Kent Kim	
Kent Kim Test Engineer	Leslie Bai Engineering Reviewer

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.





Title: EMC Test Report of Intelicis Corporation, model : CEDAR 880AG
To FCC 15.247 2007

Serial# SL07082702-INT-002(15.247)
Issue Date 30 October 2007
Page 2 of 75
www.siemic.com

SIEMIC ACREDITATION DETAILS: NVLAP Lab Code: 200729-0

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 200729-0

SIEMIC Laboratories

San Jose, CA

is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in
NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS


2007-01-01 through 2007-12-31

Effective dates



Darryl S. Bruce

For the National Institute of Standards and Technology

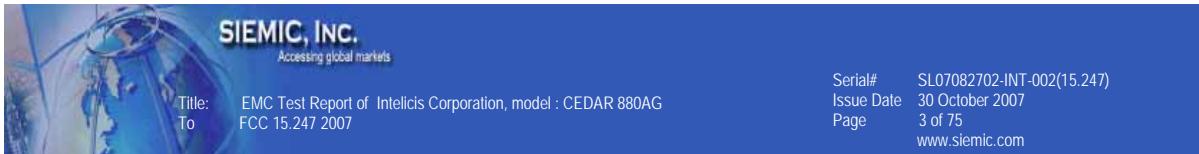

SIEMIC ACREDITATION DETAILS: FCC Registration No. 783147

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

January 27, 2005

Registration Number: 783147

SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131

Attention: Leslie Bai

Re: Measurement facility located at San Jose
3 & 10 meter site
Date of Renewal: January 27, 2005


Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parrish
Information Technician

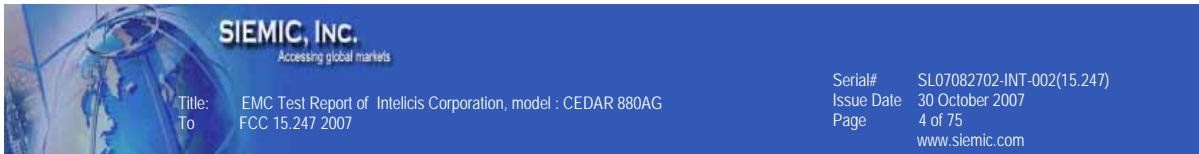

SIEMIC ACREDITATION DETAILS: Industry of Canada Registration No. 4842-1



April 26, 2006

OUR FILE: 46405-4842
Submission No: 114591

Siemic Inc.
2106 Ringwood Ave.,
San Jose, CA 95131

Dear Sir/Madame:

The Bureau has received your application for the Alternate Test Site and the filing is satisfactory to Industry Canada.

Please reference to the file number (4842-1) in the body of all test reports containing measurements performed on the site.

Renewal of the filing is required every two years.

If you have any questions, you may contact the Bureau at the telephone number below or by e-mail at certification.bureau@ic.gc.ca. Please reference our file number above for all correspondence.

Yours sincerely,

Robert Corey
Manager Certification
Certification and Engineering Bureau
3701 Carling Ave., Building 94
Ottawa, Ontario
K2H 8S2
Tel. No. (613) 990-3869

SIEMIC ACREDITATION DETAILS: Japan VCCI Registration No. 2195



Voluntary Control Council for Interference
by Information Technology Equipment
7F NDA Bldg. 2-3-5, Azabudai,
Minato-Ku, Tokyo, Japan, 106-0041
Tel+81-3-5575-3138
Fax+81-3-5575-3137
<http://www.vccior.jp>

February 12, 2004

TO: SIEMIC, INC.

Membership NO: 2195

We confirmed your payment for annual membership fee and admission fee. Thank you very much for your remitting.

Please find enclosed VCCI documents. As admission fee and annual membership fee were confirmed, your company registered as VCCI official member.

From now on, it is possible for your company to submit conformity verification report or/and application for registration of measurement facilities.

Please find necessary forms for your submission from VCCI web-site.
www.vccior.jp

When you submit conformity verification report, please submit to Ms. Yoko Inagaki / inagaki@vccior.jp and application for registration of measurement facilities, please submit to Mr. Masaru Denda / denda@vccior.jp


Their address, phone and fax number are absolutely same as L. Please refer address indicated on top right-hand corner of this page.

If you have any other questions regarding membership, feel free to contact me.
Thank you very much.

Best Regards,

Naoko Hori (Ms.)
VCCI
hori@vccior.jp

Enclosure

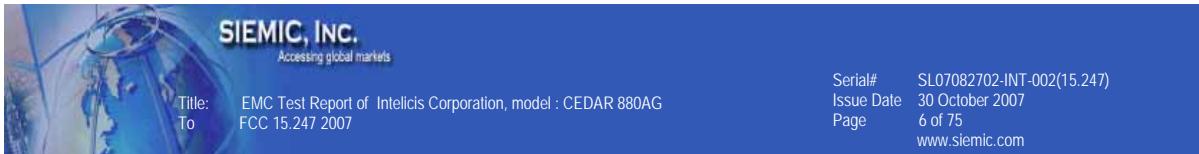

SIEMIC ACREDITATION DETAILS: Japan RF Technologies Accreditation No. MRF050927





SIEMIC ACREDITATION DETAILS: Korea MIC Lab Code: KR0032



SIEMIC ACREDITATION DETAILS: Korea CAB ID: US0160

	UNITED STATES DEPARTMENT OF COMMERCE National Institute of Standards and Technology Gaithersburg, Maryland 20889										
April 17, 2006											
<p>Mr. Leslie Bai SIEMIC Laboratories 2206 Ringwood Avenue San Jose, CA 95131</p> <p>Dear Mr. Bai:</p> <p>I am pleased to inform you that your laboratory has been recognized by the Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures, of the APEC Tel MRA. The pertinent information about your laboratory's designation is as follows:</p> <p>CAB Name: SIEMIC Laboratories Identification No.: US0160 Scope:</p> <table border="1"> <thead> <tr> <th>Coverage</th> <th>Standards</th> <th>Date of Recognition</th> </tr> </thead> <tbody> <tr> <td>Electro Magnetic Interference</td> <td> 1. RRL Notice No. 2005-82: Technical Requirements for Electromagnetic Interference 2. Annex 8(KN-22), RRL Notice No. 2005-131: Conformity Assessment Procedure for Electromagnetic Interference </td> <td>April 13, 2006</td> </tr> <tr> <td>Electro Magnetic Susceptibility</td> <td> 1. RRL Notice No. 2005-130: Technical Requirements for Electromagnetic Susceptibility 2. Annex 1-7(KN-61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11), RRL Notice No. 2005-132: Conformity Assessment Procedure for Electromagnetic Susceptibility </td> <td>April 13, 2006</td> </tr> </tbody> </table> <p>You may submit test data to RRL to verify that the equipment to be imported into Korea satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements.</p> <p>The names of all recognized CABs will be posted on the NIST website at http://ts.nist.gov/mra. If you have any questions please contact Mr. Jagindar (Joe) Dhillon at (301) 975-5521. We appreciate your continued interest in our international conformity assessment activities.</p> <p>Sincerely,</p> <p></p> <p>David F. Alderman Group Leader, Standards Coordination and Conformity Group</p> <p>cc: Jagindar Dhillon</p> <p style="text-align: right;">NIST</p>			Coverage	Standards	Date of Recognition	Electro Magnetic Interference	1. RRL Notice No. 2005-82: Technical Requirements for Electromagnetic Interference 2. Annex 8(KN-22), RRL Notice No. 2005-131: Conformity Assessment Procedure for Electromagnetic Interference	April 13, 2006	Electro Magnetic Susceptibility	1. RRL Notice No. 2005-130: Technical Requirements for Electromagnetic Susceptibility 2. Annex 1-7(KN-61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11), RRL Notice No. 2005-132: Conformity Assessment Procedure for Electromagnetic Susceptibility	April 13, 2006
Coverage	Standards	Date of Recognition									
Electro Magnetic Interference	1. RRL Notice No. 2005-82: Technical Requirements for Electromagnetic Interference 2. Annex 8(KN-22), RRL Notice No. 2005-131: Conformity Assessment Procedure for Electromagnetic Interference	April 13, 2006									
Electro Magnetic Susceptibility	1. RRL Notice No. 2005-130: Technical Requirements for Electromagnetic Susceptibility 2. Annex 1-7(KN-61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11), RRL Notice No. 2005-132: Conformity Assessment Procedure for Electromagnetic Susceptibility	April 13, 2006									

SIEMIC ACREDITATION DETAILS: Taiwan BSMI Accreditation No. SL2-IN-E-1130R



UNITED STATES DEPARTMENT OF COMMERCE
National Institute of Standards and Technology
Gaithersburg, Maryland 20889

May 3, 2006

Mr. Leslie Bai
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Chinese Taipei's Bureau of Standards, Metrology, and Inspection (BSMI) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA. You may submit test data to BSMI to verify that the equipment to be imported into Chinese Taipei satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements. The pertinent designation information is as follows:

- BSMI number: **SL2-IN-E-1130R** (Must be applied to the test reports)
- U.S. Identification No: **US0160**
- Scope of Designation: **CNS 13438**
- Authorized signatory: **Mr. Leslie Bai**


The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions, please contact Mr. Dhillon at 301-975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

David F. Alderman
Group Leader, Standards Coordination and Conformity Group

cc: Jagminder Dhillon

NIST

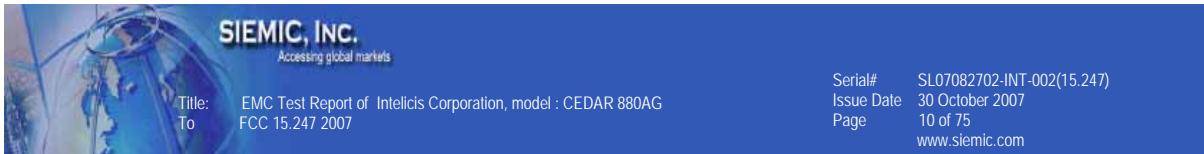

SIEMIC ACREDITATION DETAILS: Taiwan NCC CAB ID: US0160



UNITED STATES DEPARTMENT OF COMMERCE
National Institute of Standards and Technology
Gaithersburg, Maryland 20889

August 8, 2006

Mr. Leslie Bai
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that SIEMIC Laboratories has been recognized by the Chinese Taipei's National Communications Commission (NCC) under the Asia Pacific Economic Cooperation for Telecommunications and Information, Mutual Recognition Arrangement (APEC Tel MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA.

You may submit test data to NCC to verify that the equipment to be imported into Chinese Taipei satisfies their applicable requirements using the following guidelines:

- Your laboratory's assigned 6-digit U.S. identification number is **US0160**. You should reference this number in your correspondence.
- The scope of designation is limited to **LP0002**. Your designation will remain in force as long as your accreditation remains valid for the scope of designation.


If you have any questions please contact Mr. Jogindar Dhillon via email at dhillon@nist.gov or via fax at 301-975-5414. The names of all recognized laboratories will be posted on the NIST website at <http://is.nist.gov/mra>. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

David F. Alderman
Group Leader, Standards Coordination and Conformity Group


cc: Jogindar Dhillon

NIST

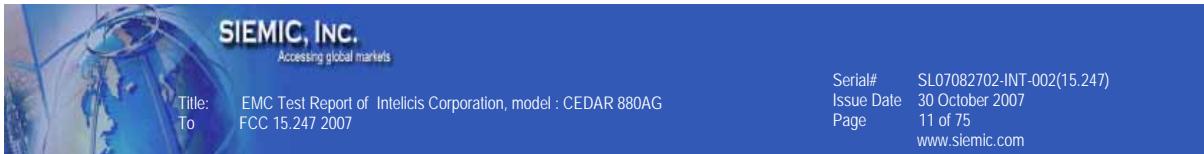

SIEMIC ACREDITATION DETAILS: Mexico NOM Recognition

 <p>CAMARA NACIONAL DE LA INDUSTRIA ELECTRONICA, DE TELÉCOMUNICACIONES E INFORMÁTICA</p>	<p>Laboratorio Valentín V. Rivero</p> <p>México D.F. a 11 de octubre de 2006.</p> <p>LESLIE BAI DIRECTOR OF CERTIFICATION SIEMIC LABORATORIES, INC. ACCESSING GLOBAL MARKETS P R E S E N T E</p> <p>En contestación a su escrito de fecha 5 de septiembre del año en curso, le comento que estamos muy interesados en su intención de firmar un Acuerdo de Reconocimiento Mutuo, para lo cual adjunto a este escrito encontrarás el Acuerdo en idioma inglés y español preliminar de los cuales le pido sea revisado y en su caso corregido, para que si esta de acuerdo poder firmarlo para mandarlo con las autoridades Mexicanas para su visto bueno y así poder ejercer dicho acuerdo.</p> <p>Aprovecha este escrito para mencionarte que nuestro intermediario gestor será la empresa Isabel de México, S. A. de C. V., empresa que ha colaborado durante mucho tiempo con nosotros en lo referido a la evaluación de la conformidad y que cuenta con amplia experiencia en la gestoría de la certificación de cumplimiento con Normas Oficiales Mexicanas de producto en México.</p> <p>Me despido de usted enviándole un cordial saludo y esperando sus comentarios al Acuerdo que nos ocupa.</p> <p>Atentamente:</p> <p> Ing. Faustino Gómez González Gerente Técnico del Laboratorio de CANIETI.</p> <p>Calle 83, 71 Hacienda Caciques 06100 México, D.F. Tel: 5264-0006 con 12 líneas Fax: 5264-5333 www.canieti.org</p>
---	---

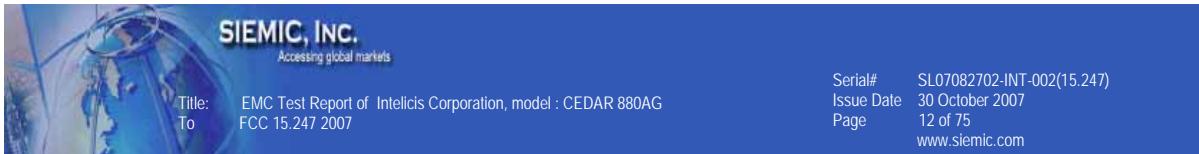

SIEMIC ACREDITATION DETAILS: Hong Kong OFTA Recognition No. D23/16V



Your Ref 来函檔號 : D23/16 V
Our Ref 本局檔號 :

Telephone 電話 : (852) 2961 6320
Fax No 圖文傳真 : (852) 2838 5004
E-mail 電郵地址 : 20 July 2005

Mr. Leslie Bai
Director of Certification,
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, California 95131
USA

Dear Mr. Bai,

Application of Recognised Testing Agency (RTA)

Referring your subemission of 28 June 2005 in relation to the application of RTA, I am pleased to inform you that OFTA has appointed SIEMIC Laboratories (SIEMIC) as a Recognised Testing Agency (RTA) :

Please note that, under the Hong Kong Telecommunications Equipment Evaluation and Certification (HKTEC) Scheme, SIEMIC is authorized to conduct evaluation tests on telecommunications equipment against the following HKTA specifications :

Scope of recognition (HKTA Specifications):


1001, 1002, 1004, 1006, 1007, 1008
1010, 1015, 1016
1022, 1026, 1027, 1029
1030, 1031, 1032, 1033, 1034, 1035, 1039
1041, 1042, 1043, 1045, 1047, 1048
2001

You are requested to refer to and comply with the code of practice and guidelines for RTA as given in the Information Note OFTA I 411 "Recognised Testing Agency (RTA) for Conducting Evaluation Test of Telecommunications Equipment", which can be downloaded from OFTA's homepage at <http://www.ofta.gov.hk/tec/information-notes.html>.


If you have any queries, please do not hesitate to contact me.

Yours sincerely,

(K. K. Sin)
for Director-General
of Telecommunications

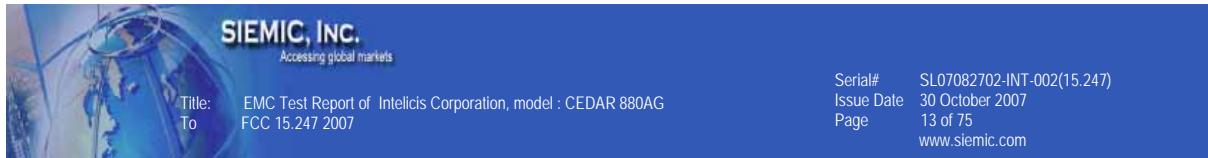


This page has been left blank intentionally.

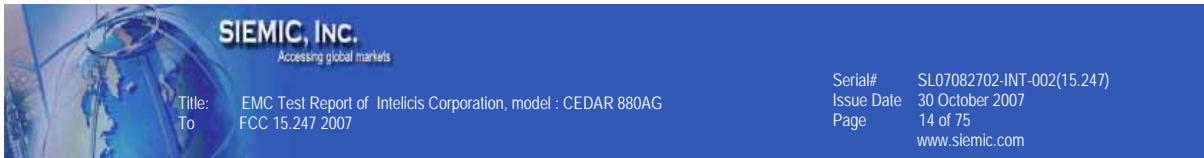

CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION	2
2	TECHNICAL DETAILS	2
3	MODIFICATION	2
4	TEST SUMMARY	2
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	2
	ANNEX A. TEST INSTRUMENT & METHOD	2
	ANNEX B EUT AND TEST SETUP PHOTOGRAPHS	2
	ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	2
	ANNEX D USER MANUAL, BLOCK & CIRCUIT DIAGRAM	2

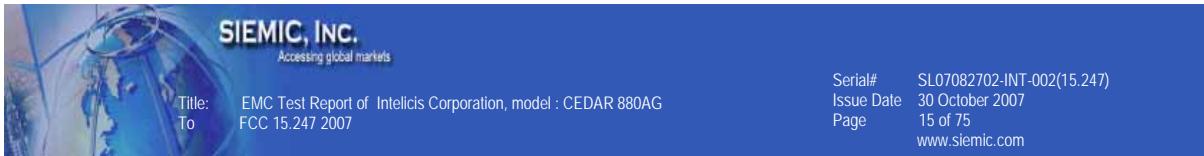


This page has been left blank intentionally.

1 Executive Summary & EUT information

The purpose of this test programme was to demonstrate compliance of the Intelicis Corporation Enterprise Dual Radio Access Point / Bridge, against the current Stipulated Standards. The Enterprise Dual Radio Access Point / Bridge have demonstrated compliance with the FCC 15.247 2007.


EUT Information

EUT Description	: Intelicis Cedar 880AG Access Points is a high-performance access points that supports a wide range of enterprise applications. It provides data communications system to extend the capability of the existing wired network to provide connectivity for wireless devices. It connects wireless communication devices. It is usually connected to a wired network on one end, and relays data to the wireless network on the other end. As part of the Intelicis Wireless Infrastructure product families, Cedar Access Points work seamlessly with other Intelicis products such as Cypress Wireless Switches and Redwood Mobility Management Centers to provide a comprehensive solution for wired and wireless LAN integration of enterprise networks.
Model No	: CEDAR 880AG
Serial No	: CD880AG070304
Input Power	: 100~240 Vac
Classification	: Spread Spectrum System / device
Per Stipulated Test Standard	

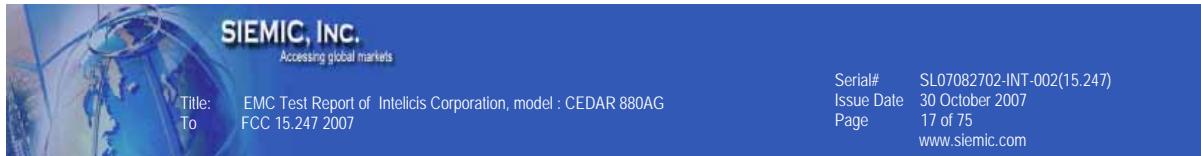

2 TECHNICAL DETAILS

Purpose	Compliance testing of Enterprise Dual Radio Access Point / Bridge with stipulated standard
Applicant / Client	Intelicis Corporation
Manufacturer	Intelicis Corporation 4633 Old Ironsides Drive, Suite 150 Santa Clara, CA 95054
Laboratory performing the tests	SIEMIC Laboratories
Test report reference number	SL07082702-INT-002(15.247)
Date EUT received	28 September 2007
Standard applied	47 CFR §15.247 (2007)
Dates of test (from – to)	01 October 2007 - 26 October 2007
No of Units:	1
Equipment Category:	DSS
Trade Name:	Intelicis Corporation
Model :	CEDAR 880AG
RF Operating Frequency (ies)	2412 ~ 2462 MHz & 5745~5825MHz
Number of Channels :	11 (802.11b/g) , 5 (802.11a High band)
Modulation :	DSSS/OFDM
FCC ID :	U3HCEDAR880AG
IC ID :	None

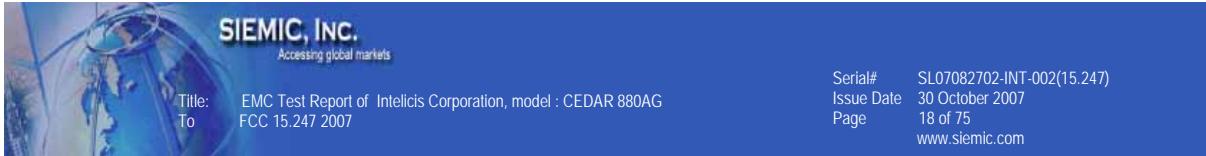

3 MODIFICATION

NONE

4 TEST SUMMARY

The product was tested in accordance with the following specifications.
All Testing has been performed according to below product classification:

Spread Spectrum System / device

Test Results Summary

Test Standard		Description	Pass / Fail
CFR 47 Part 15.247: 2007	RSS 210 Issue6: 2007		
15.203		Antenna Requirement	Pass
15.205	RSS210(A8.5)	Restricted Band of Operation	Pass
15.207(a)	RSSGen(7.2.2)	Conducted Emissions Voltage	Pass
15.247(a)(1)	RSS210(A8.1)	Channel Separation	N/A
15.247(a)(1)	RSS210(A8.1)	Occupied Bandwidth	Pass
15.247(a)(2)	RSS210 (A8.2)	6dB Bandwidth	Pass
15.247(a)(1)	RSS210(A8.1)	Number of Hopping Channels	N/A
15.247(a)(1)	RSS210(A8.1)	Time of Occupancy	N/A
15.247(b)	RSS210(A8.4)	Output Power	Pass
15.247(c)	RSS210(A8.4)	Antenna Gain > 6 dBi	Pass
15.247(d)	RSS210(A8.5)	Conducted Spurious Emissions	Pass
15.209; 15.247(d)	RSS210(A8.5)	Radiated Spurious Emissions	Pass
15.247(e)	RSS210(A8.3)	Power Spectral Density	Pass
15.247(f)	RSS210(A8.3)	Hybrid System Requirement	N/A
15.247(g)	RSS210(A8.1)	Hopping Capability	N/A
15.247(h)	RSS210(A8.1)	Hopping Coordination Requirement	N/A
15.247(i)	RSSGen(5.5)	Maximum Permissible Exposure	Pass
	RSSGen(4.8)	Receiver Spurious Emissions	N/A

ANSI C63.4: 2003/ RSS-Gen Issue 2: 2007

PS: All measurement uncertainties are not taken into consideration for all presented test result.

5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 Antenna Requirement

Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
- b) Antenna must use a unique type of connector to attach to the device.
- c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.

The antenna has its own unique type of connector which meets the requirement. The antenna coax uses reverse TNC connector. Antenna gain is 2dBi for 2.4Ghz, 3dBi for 5.8GHz.



5.2 Conducted Emissions Voltage

Requirement :

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

Procedures:


1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ± 3.5 dB.
4. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar

Test Date : October 01 2007


Tested By : Kent Kim

Results: Note – Average Limit Quasi-Peak Limit

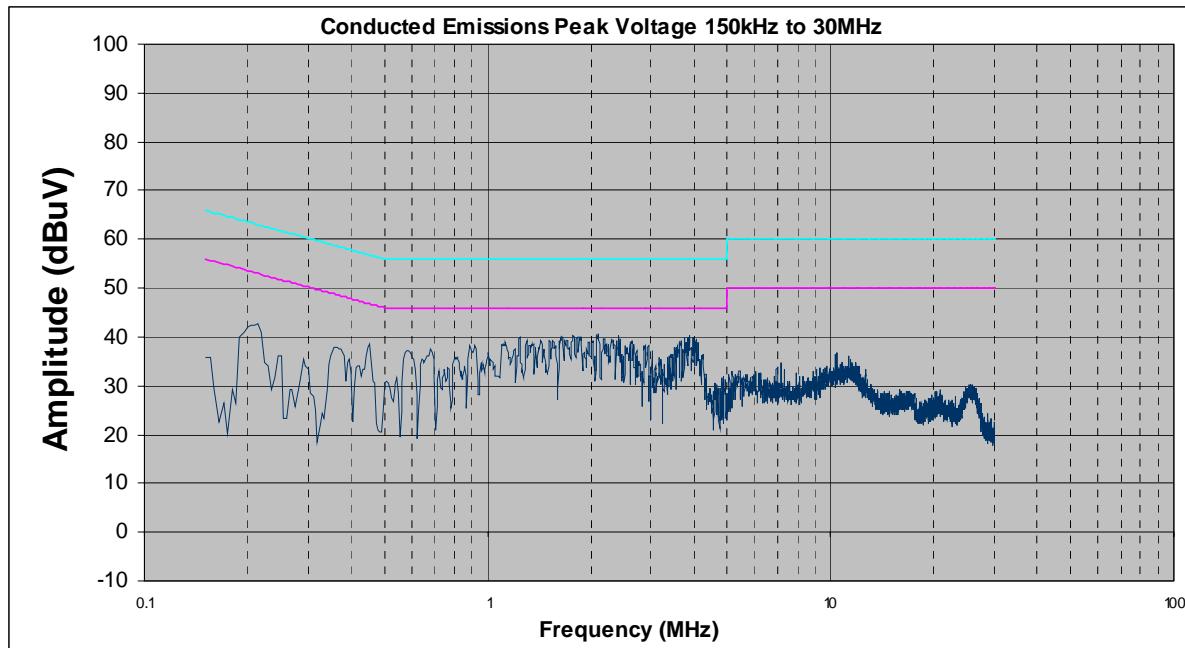

Phase Line Plot at 120Vac, 60Hz

Line Under Test	Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
Neutral	0.22	42.60	62.82	-20.22	35.50	52.82	-17.32
Neutral	0.46	38.50	56.69	-18.19	33.10	46.69	-13.59
Neutral	1.82	30.30	56.00	-25.70	27.60	46.00	-18.40
Neutral	3.88	39.90	56.00	-16.10	34.40	46.00	-11.60
Neutral	1.25	38.90	56.00	-17.10	33.50	46.00	-12.50

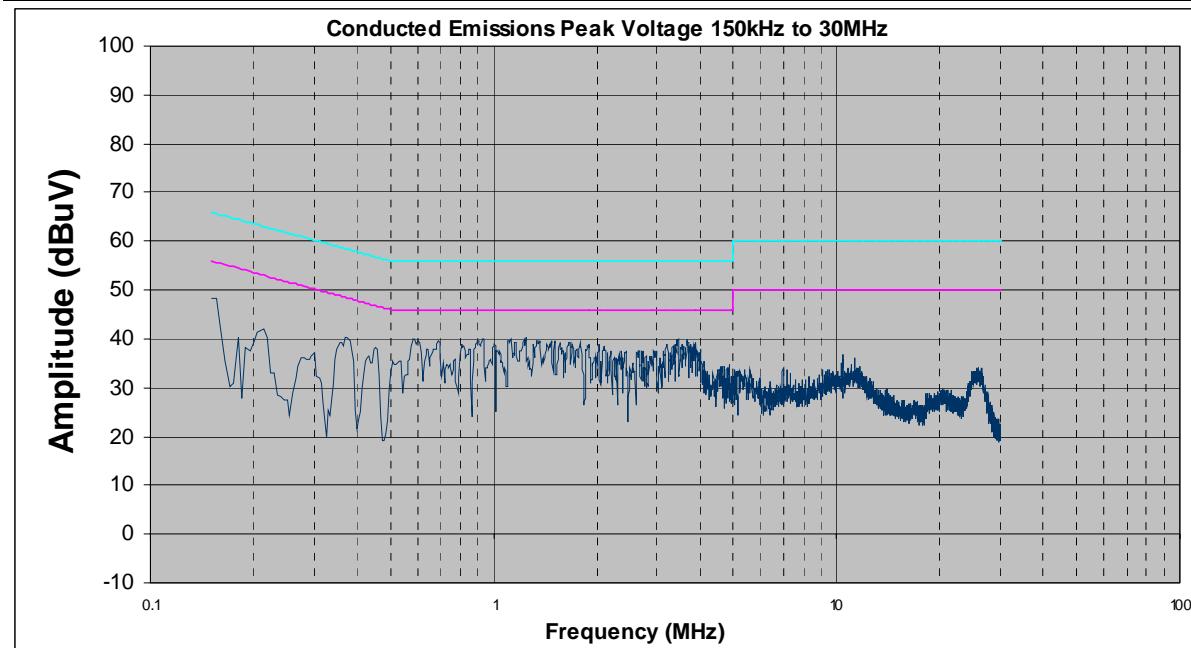

Neutral Line Plot at 120Vac, 60Hz

Line Under Test	Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
Line	0.22	43.1	62.82	-19.72	35.60	52.82	-17.22
Line	0.46	39.9	56.69	-16.79	35.60	46.69	-11.09
Line	1.82	41.2	56.00	-14.80	34.10	46.00	-11.90
Line	3.88	42.1	56.00	-13.90	35.40	46.00	-10.60
Line	1.25	42.6	56.00	-13.40	33.70	46.00	-12.30

5.3 6dB Occupied Bandwidth

1. **Conducted Measurement**
EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.
2. **Conducted Emissions Measurement Uncertainty**
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. **Environmental Conditions**

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. **Test Date :** October 02 2007
Tested By : Kent Kim


Requirement(s): 47 CFR §15.247(a)(1)

Procedures: The 6dB bandwidths were measured conducted using a spectrum analyzer at low, mid, and hi channels. 6 dB Bandwidth Limit: > 500 kHz.


Protocol	Channel	Channel Frequency (MHz)	6 dB Occupied Bandwidth Limit (MHz)	6 dB Channel Bandwidth (MHz)
802.11b	Low	2412	0.5	13.00
802.11b	Mid	2437	0.5	12.17
802.11b	High	2462	0.5	12.25
802.11g	Low	2412	0.5	16.69
802.11g	Mid	2437	0.5	16.80
802.11g	High	2462	0.5	16.75
802.11a	Low	5745	0.5	16.67
802.11a	Mid	5785	0.5	16.67
802.11a	High	5825	0.5	16.58





Refer to the attached plots.

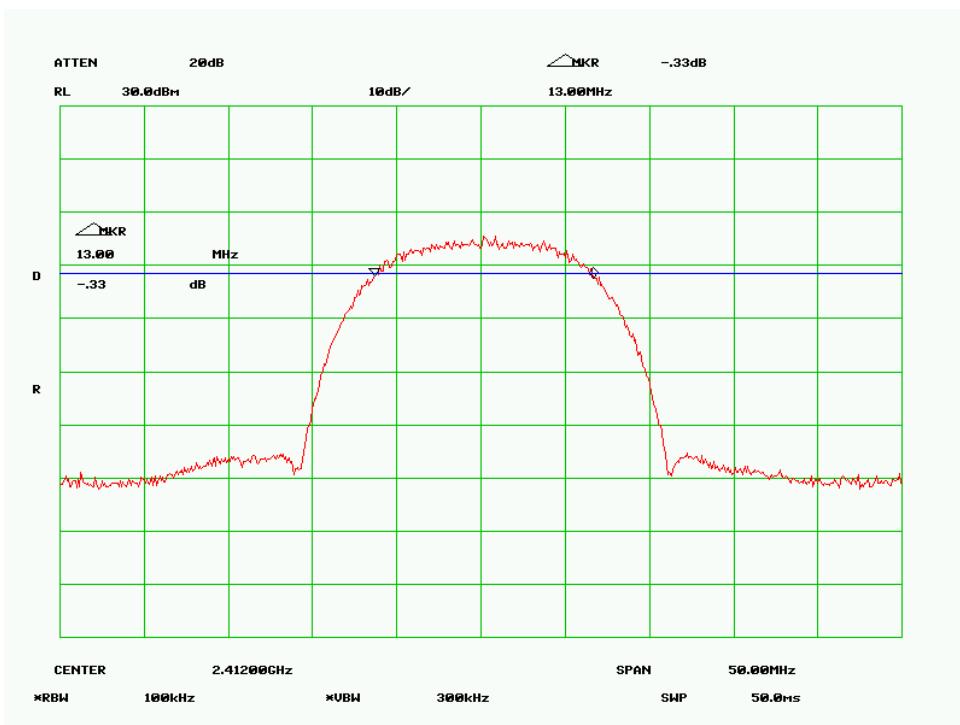


6 dB Bandwidth - Low Channel (802.11b)

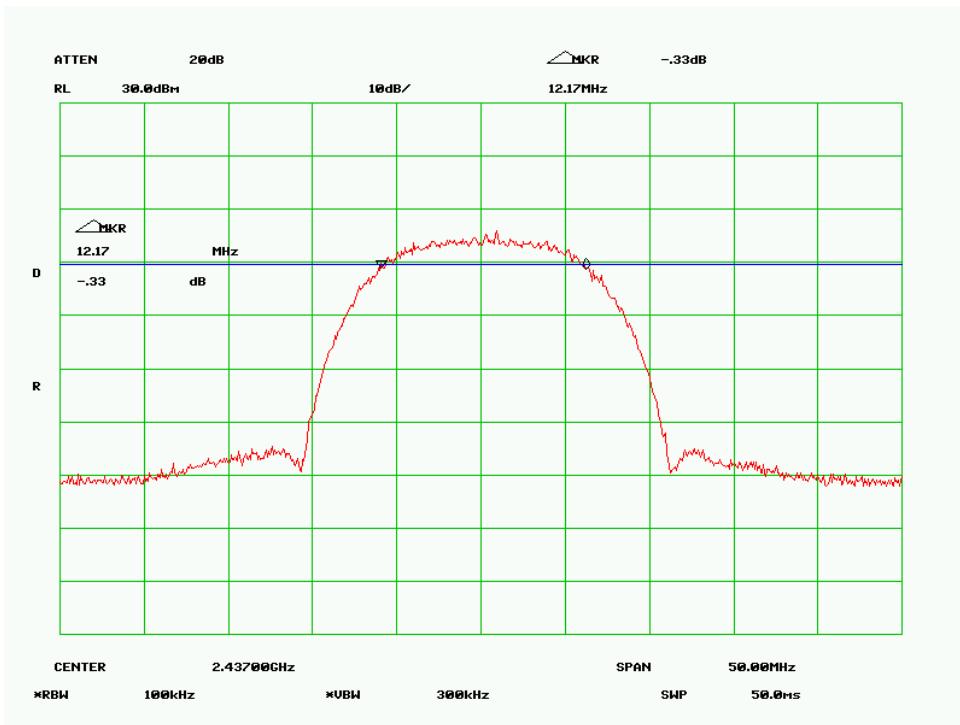



6 dB Bandwidth - Mid Channel (802.11b)

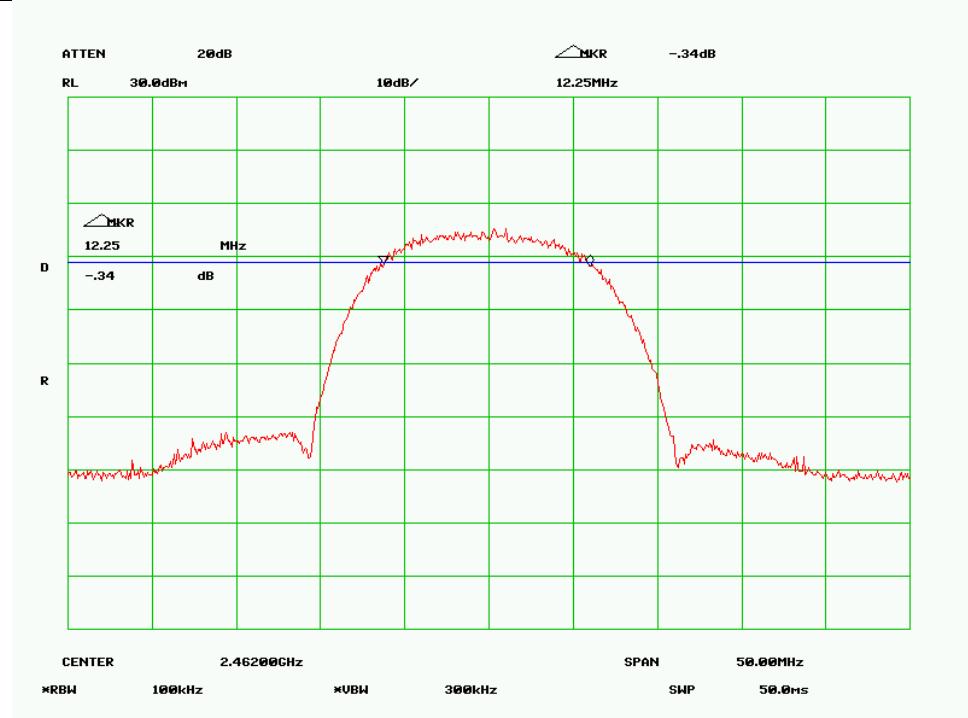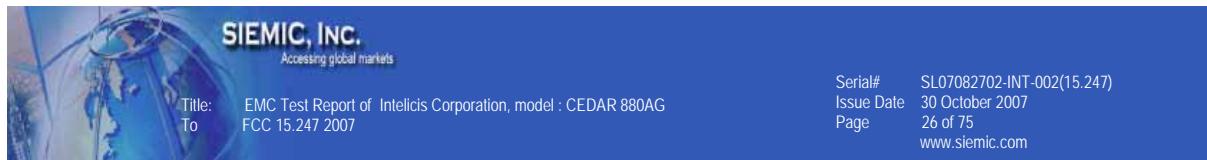


6 dB Bandwidth - High Channel (802.11b)

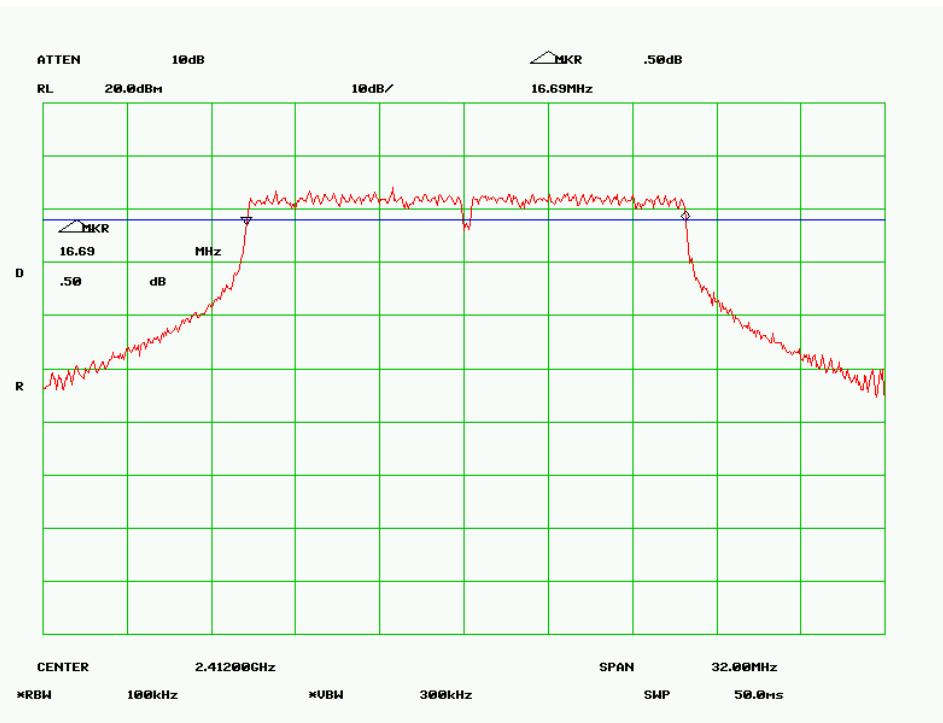



6 dB Bandwidth - Low Channel (802.11g)

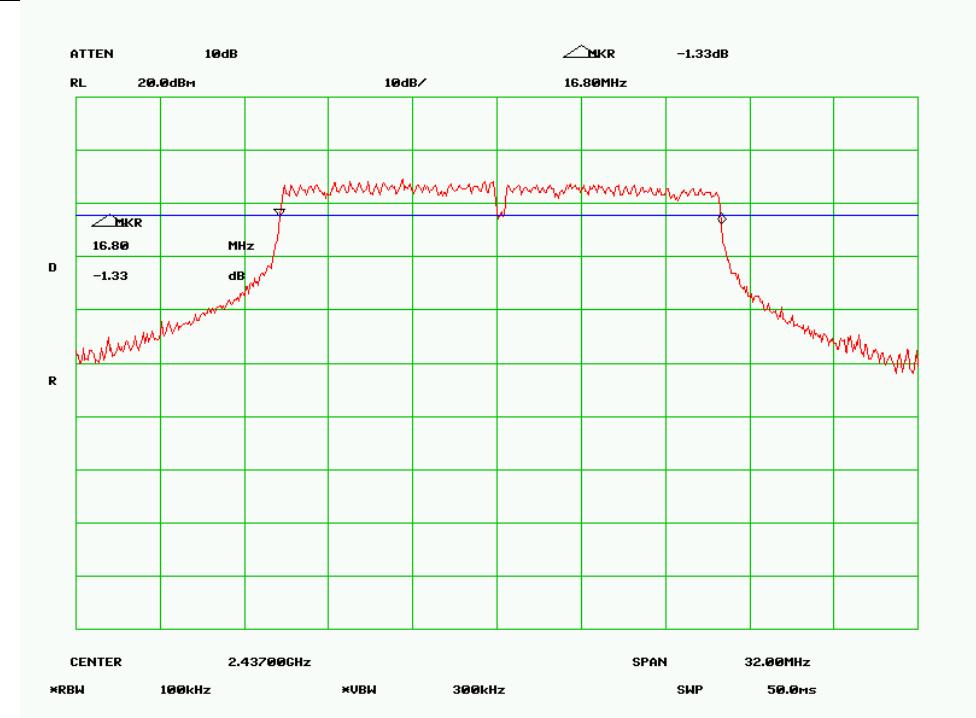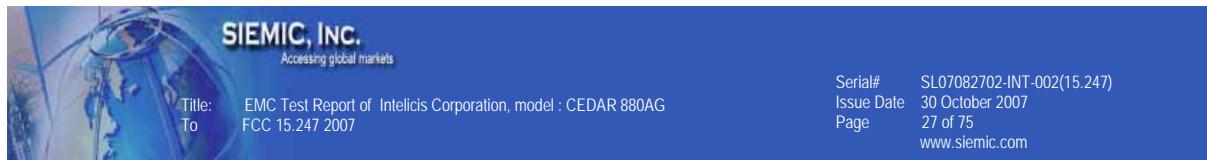


6 dB Bandwidth - Mid Channel (802.11g)

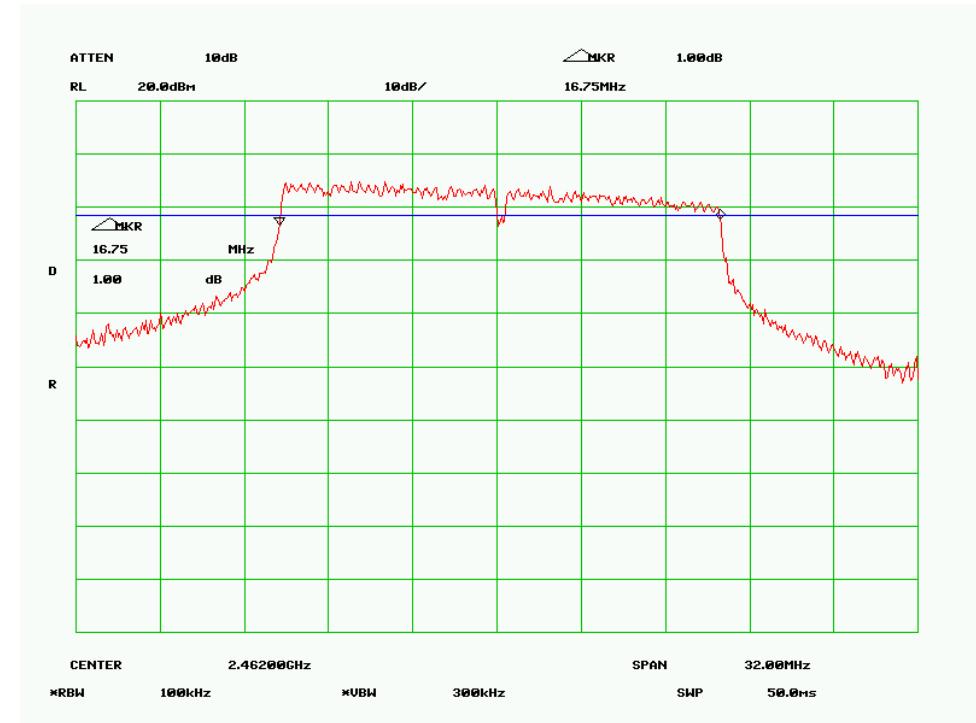



6 dB Bandwidth - High Channel (802.11g)

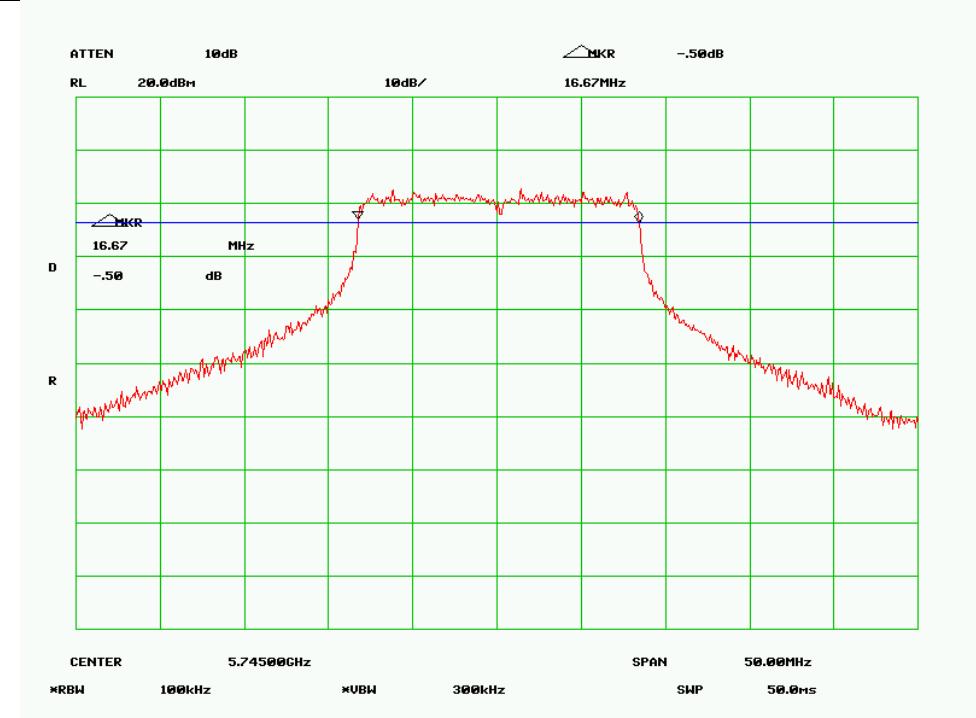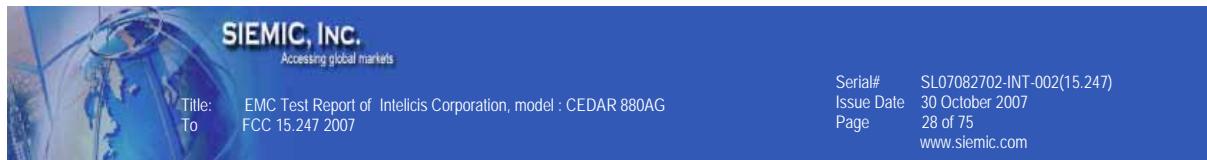

6 dB Bandwidth - Low Channel (802.11a)

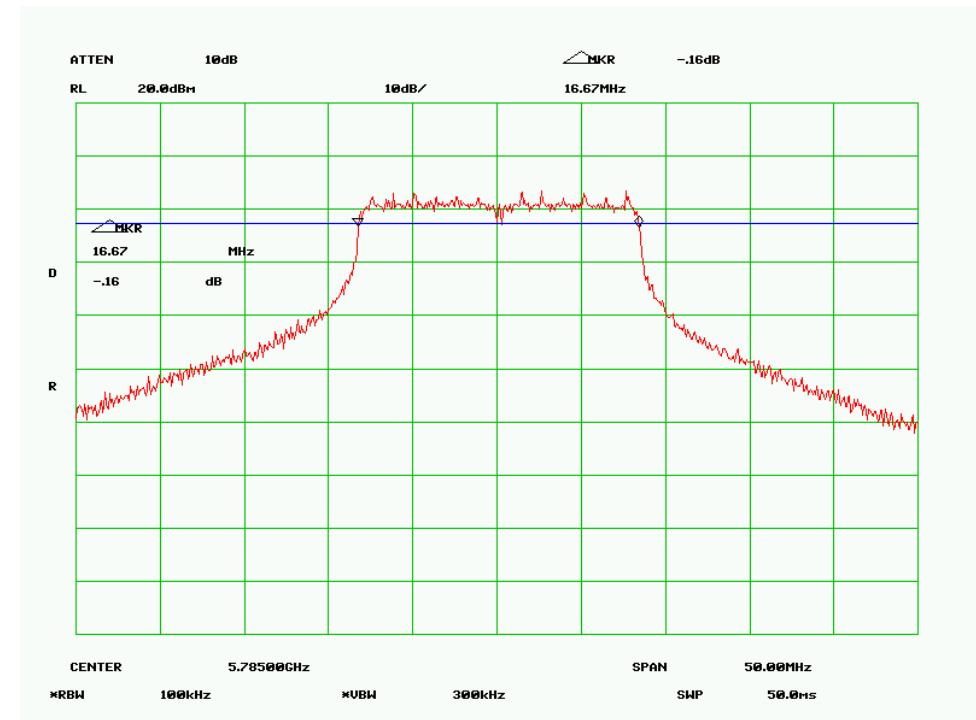

6 dB Bandwidth - Mid Channel (802.11a)

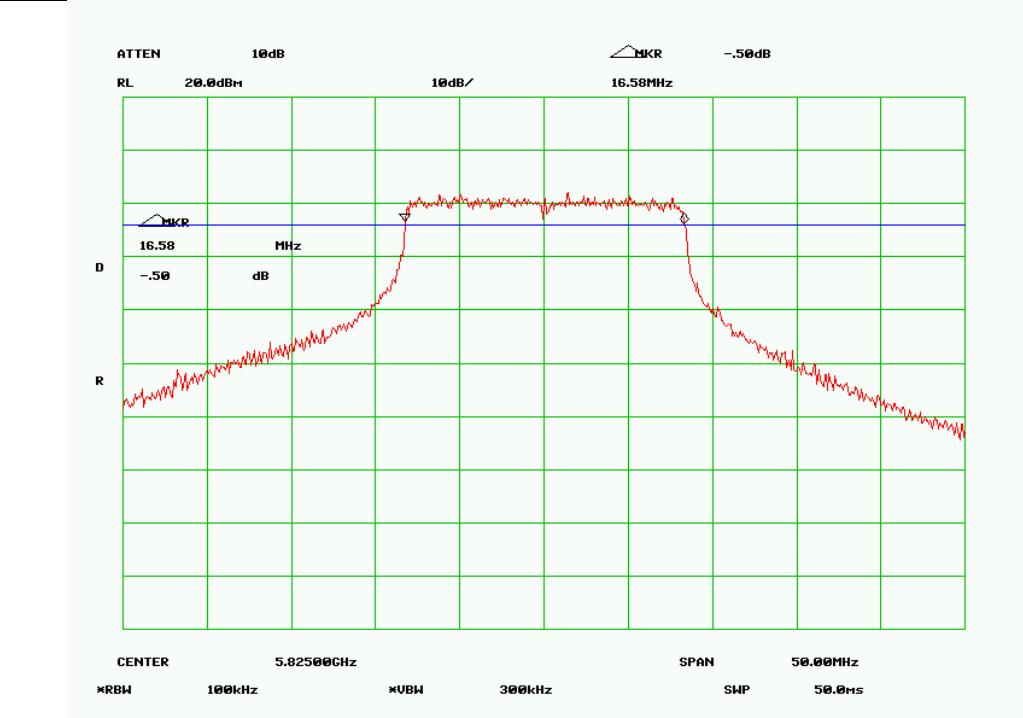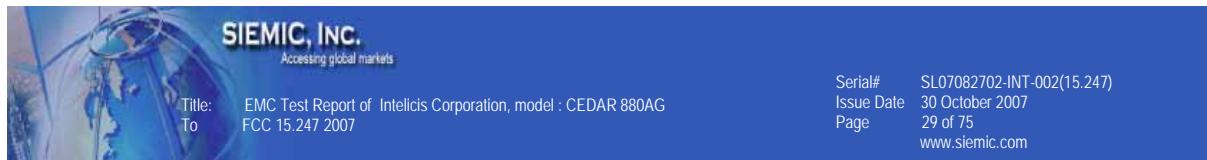

6 dB Bandwidth - High Channel (802.11a)

5.1 Peak Spectral Density

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : October 02 2007
Tested By : Kent Kim

Standard Requirement : 47 CFR §15.247(e)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

Procedures: The Peak Spectral density measurement was taken conducted using a spectrum analyzer.


RBW=3KHz, VBW > RBW , Sweep time to SPAN/RBW (sec)

Test Result :


Protocol	Channel	Channel Frequency (MHz)	Peak Spectral Density Limit (dBm/3KHz)	Peak Spectral Density (dBm/3KHz)
802.11b	Low	2412	8	-4.83
802.11b	Mid	2437	8	-6.83
802.11b	High	2462	8	-7.67
802.11g	Low	2412	8	-8.50
802.11g	Mid	2437	8	-8.00
802.11g	High	2462	8	-7.67
802.11a	Low	5745	8	-2.07
802.11a	Mid	5785	8	-2.00
802.11a	High	5825	8	-2.33

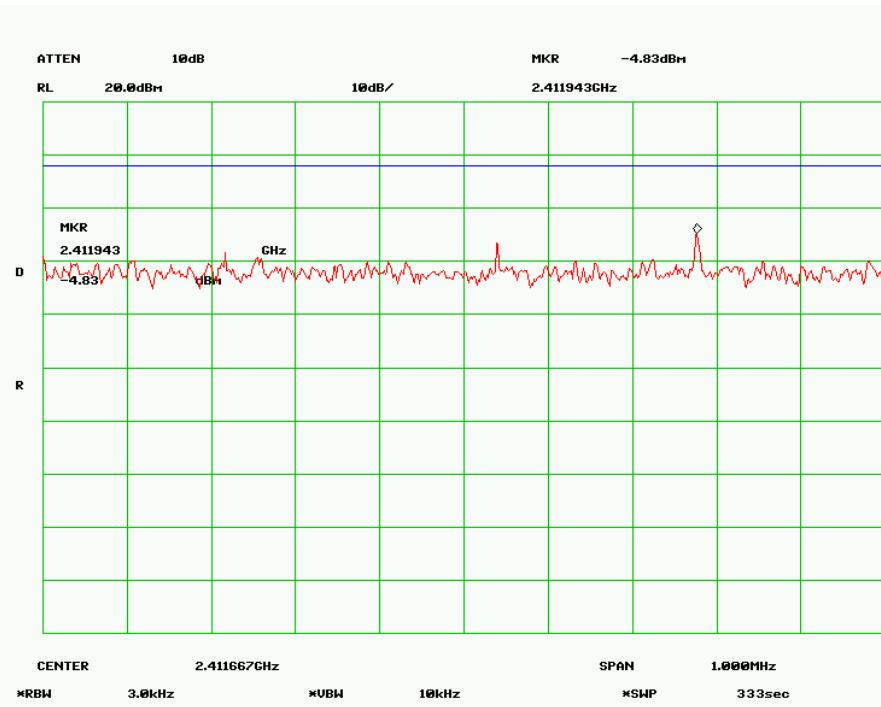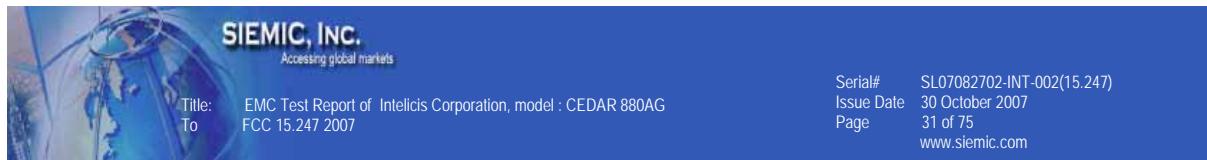


PSD Low Channel (802.11b)

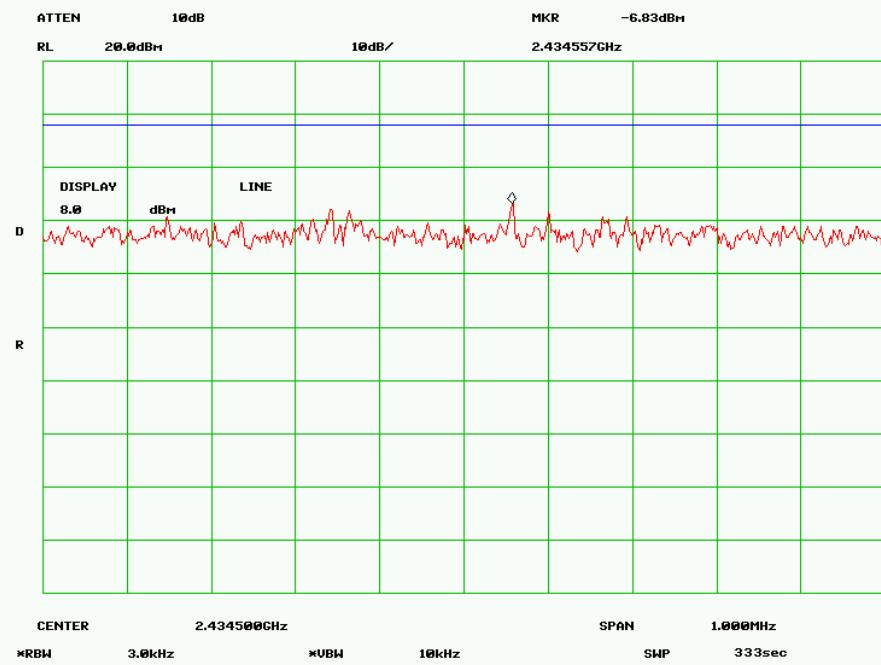


PSD Mid Channel (802.11b)

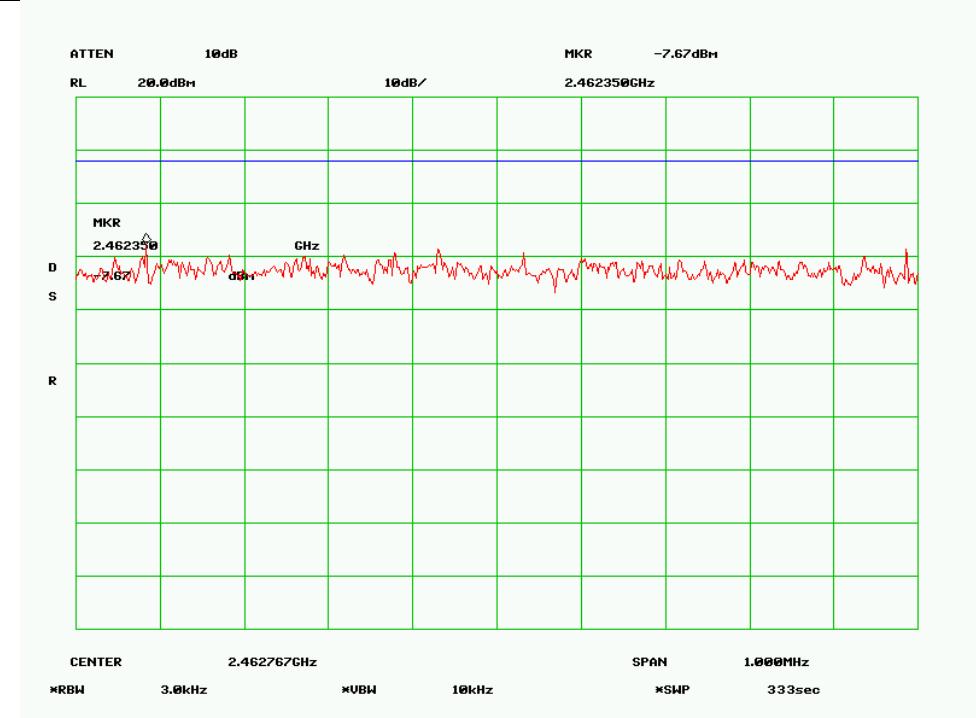


PSD High Channel (802.11b)

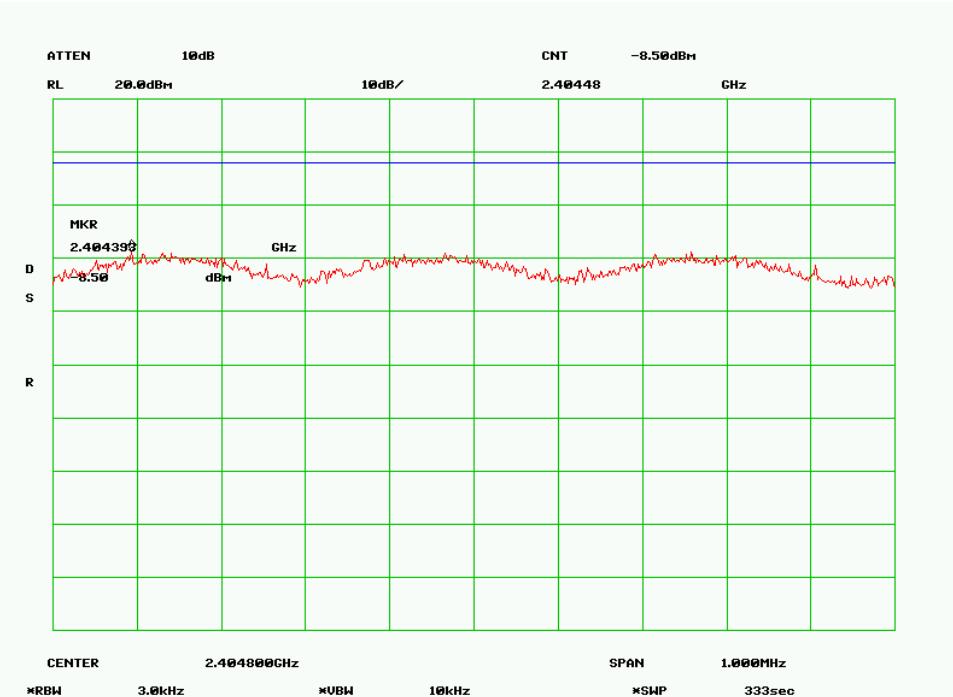


PSD Low Channel (802.11g)

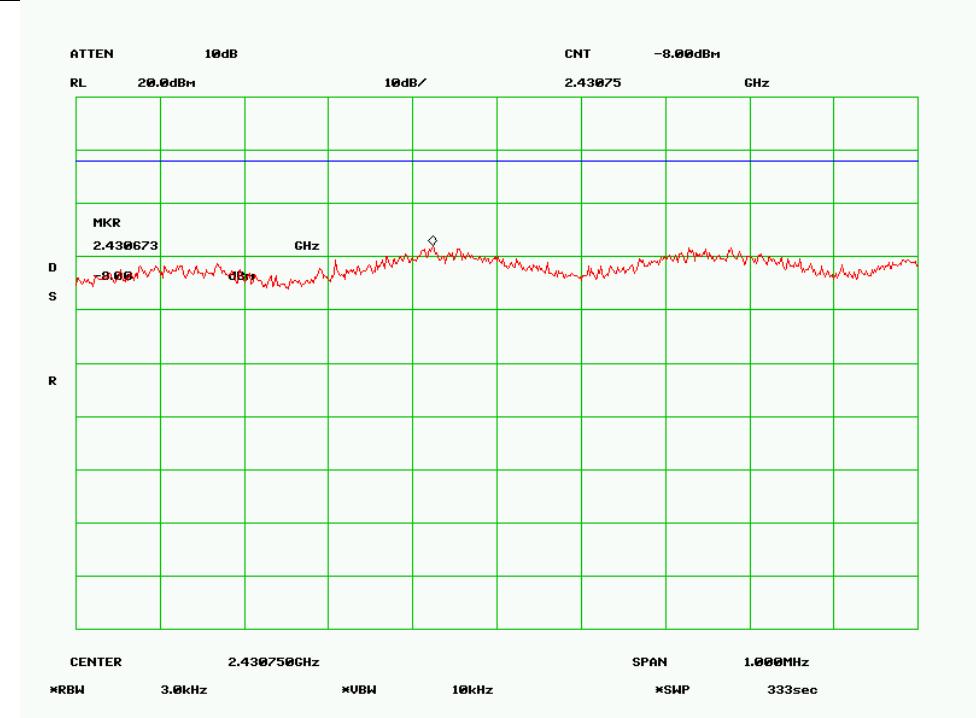


PSD Mid Channel (802.11g)

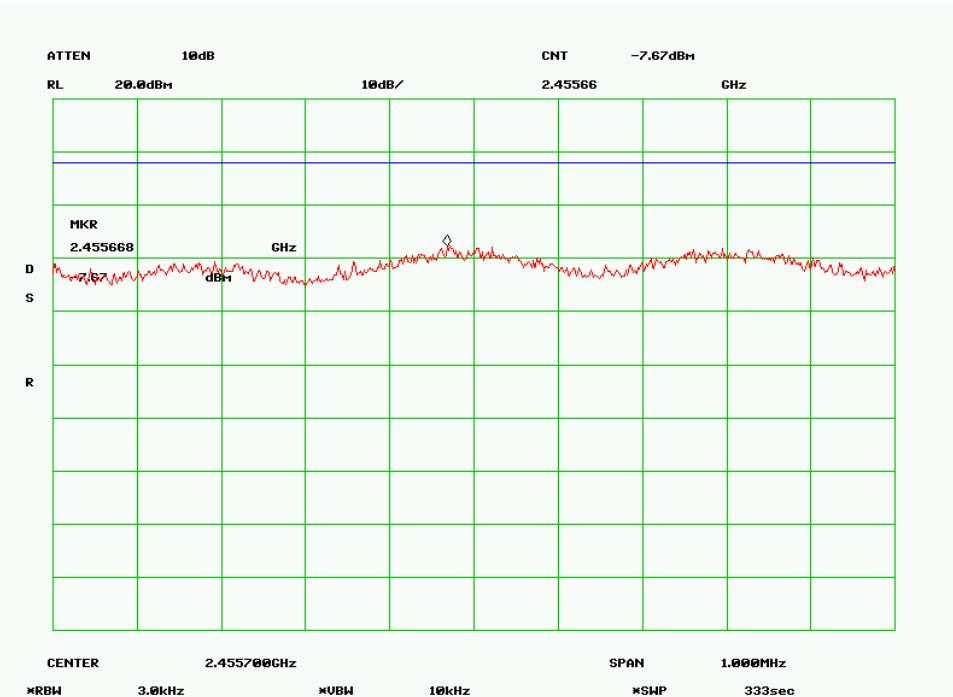



PSD High Channel (802.11g)

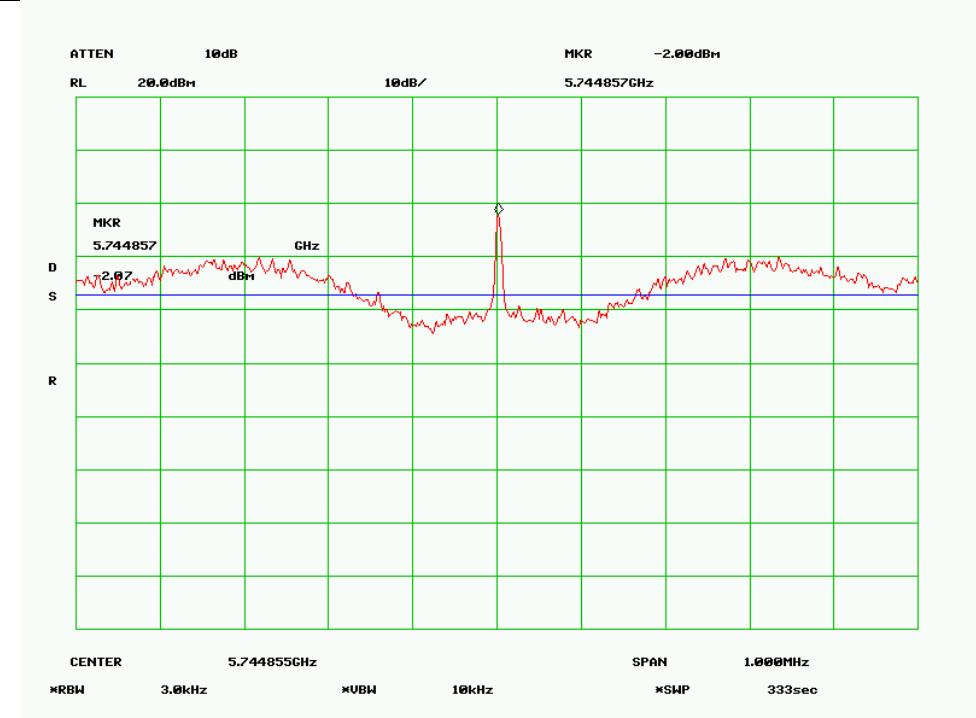

PSD Low Channel (802.11a)

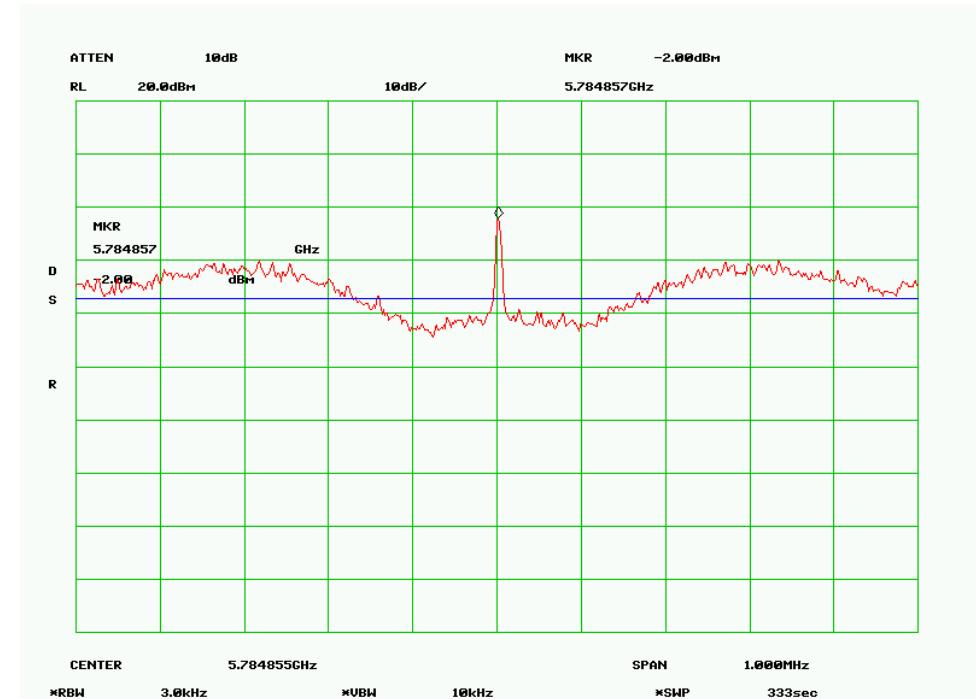

PSD Mid Channel (802.11a)

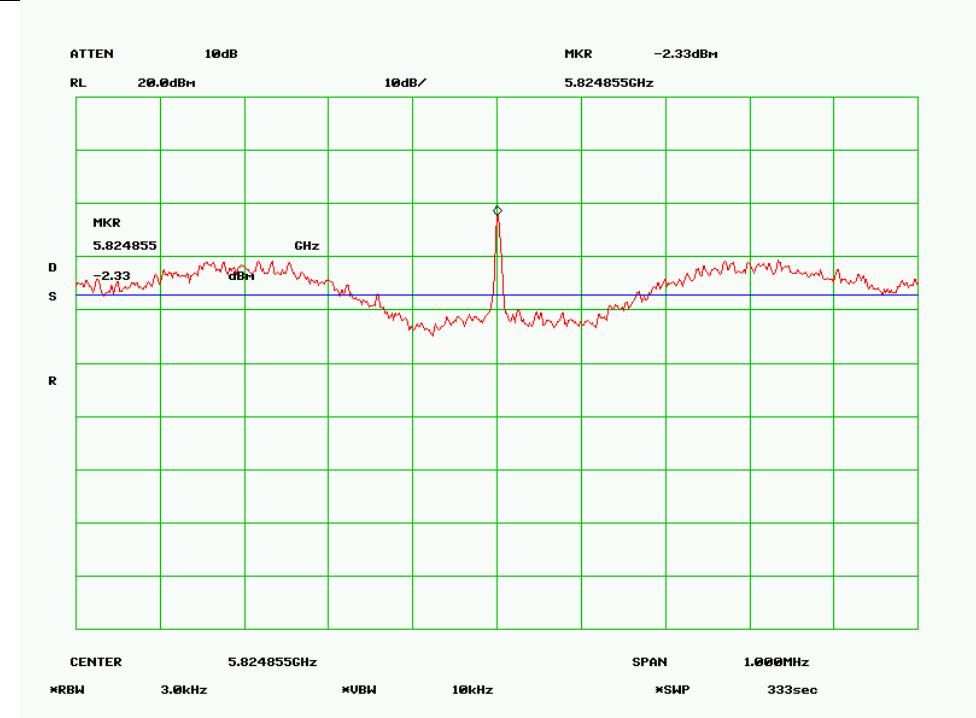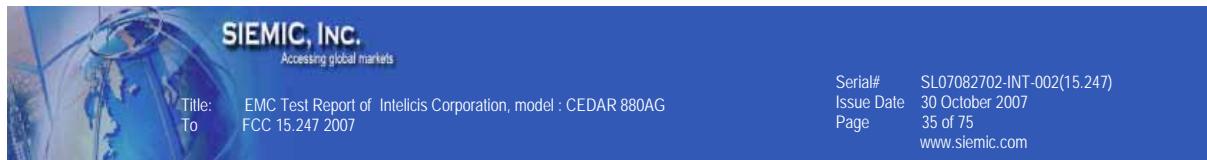

PSD High Channel (802.11a)

5.2 Peak Output Power

1. Conducted Measurement

EUT was set for low , mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

2. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.

3	Environmental Conditions	Temperature	23°C
		Relative Humidity	50%
		Atmospheric Pressure	1019mbar

4 Test Date : October 02 2007



Tested By : Kent Kim

Standard Requirement : 47 CFR §15.247(b)


Procedures: The peak output power was measured conducted using a spectrum analyzer at low, mid, and hi channels. Peak detector was set to measure the power output. The power is converted from watt to dBm, therefore, 1 watt = 30 dBm. The highest antenna gain that will be used is 3 dBi.

Test Result :



Protocol	Channel	Channel Frequency (MHz)	Peak Output Power Limit (dBm)	Measured Output Power(dBm)
802.11b	Low	2412	30	20.90
802.11b	Mid	2437	30	21.10
802.11b	High	2462	30	20.60
802.11g	Low	2412	30	24.00
802.11g	Mid	2437	30	24.20
802.11g	High	2462	30	24.70
802.11a	Low	5745	30	21.70
802.11a	Mid	5785	30	22.00
802.11a	High	5825	30	21.10

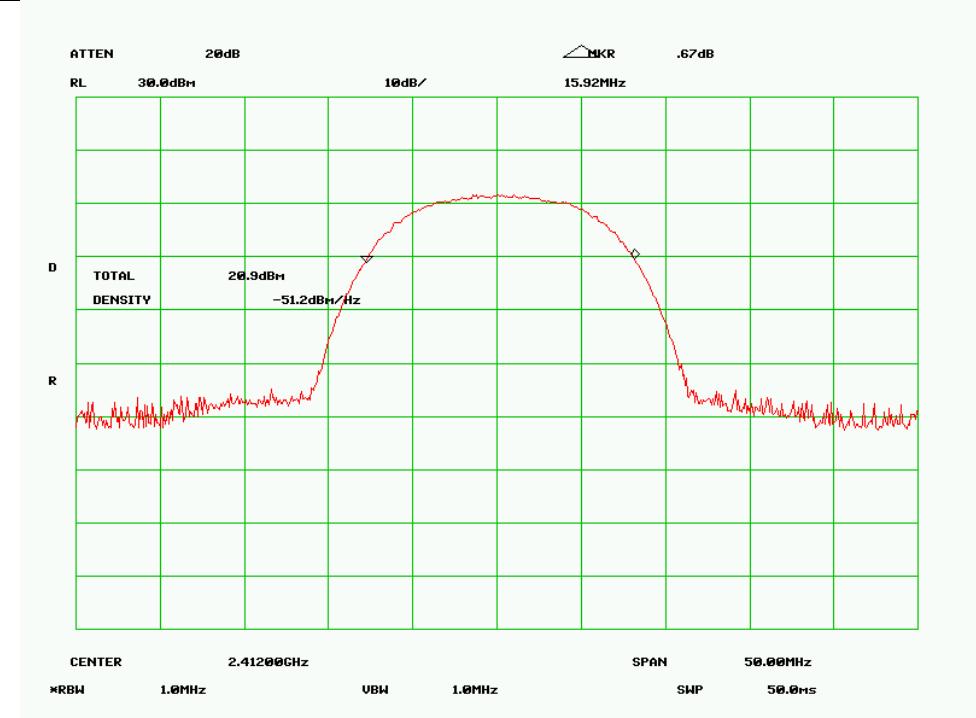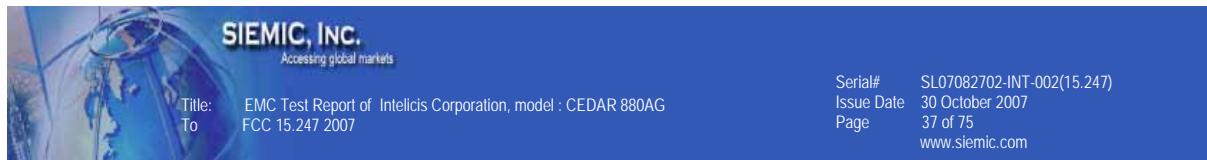


Output Power Low Channel (802.11b)

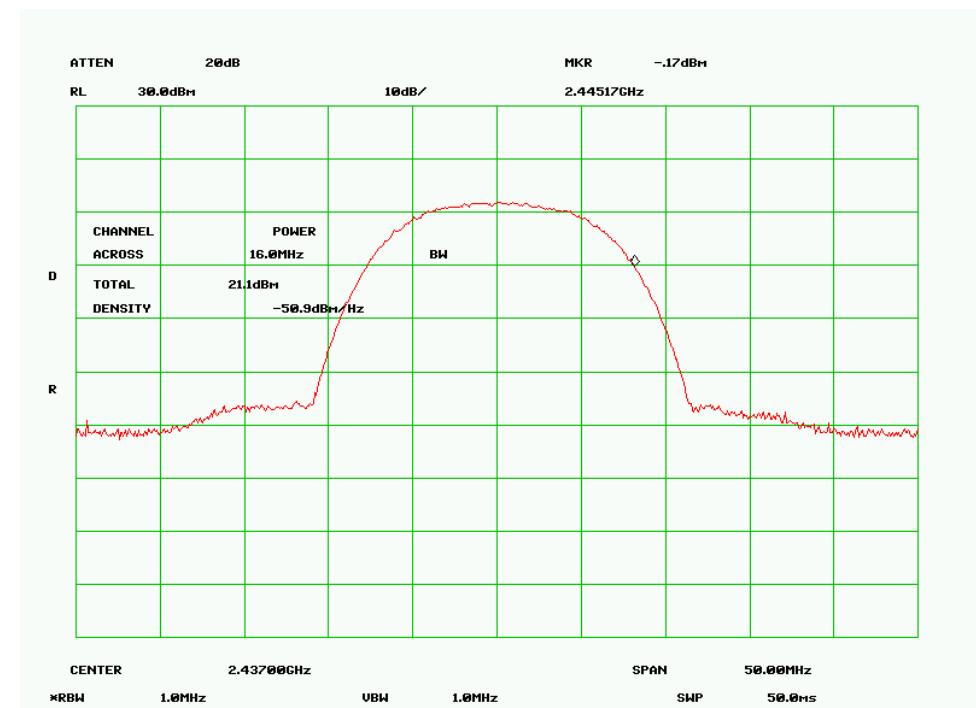



Output Power Mid Channel (802.11b)

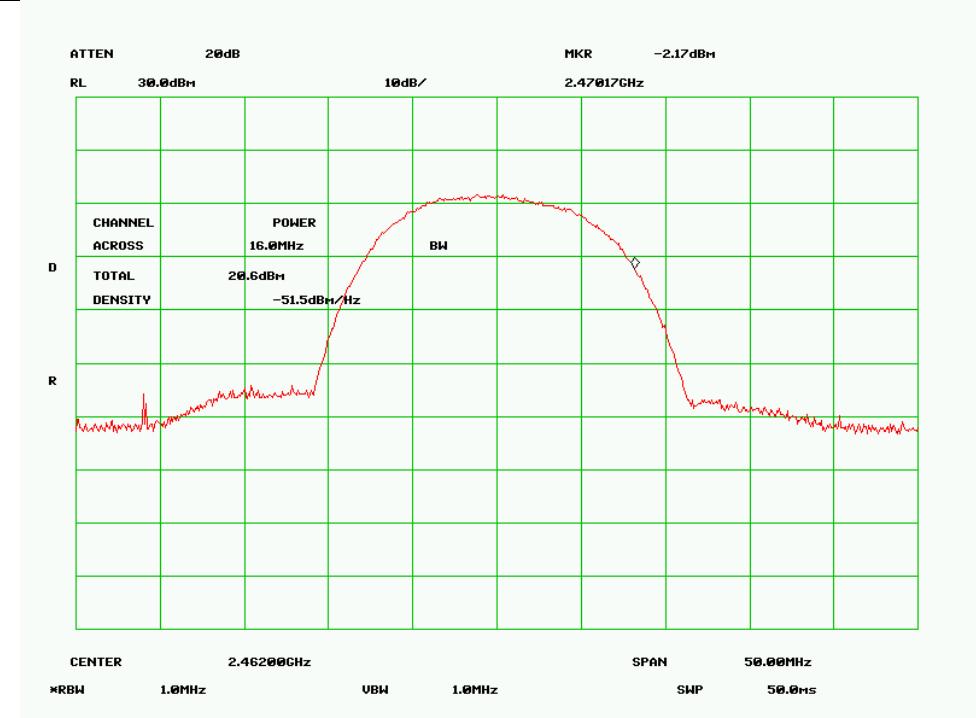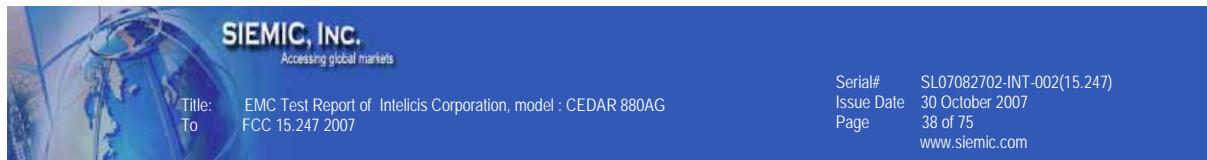


Output Power High Channel (802.11b)

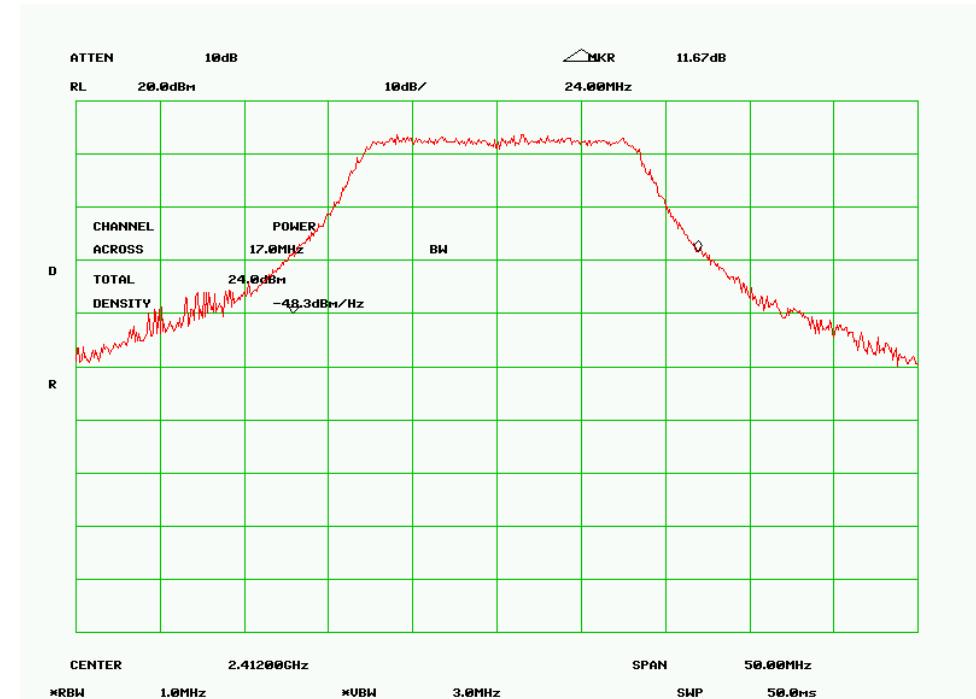



Output Power Low Channel (802.11g)

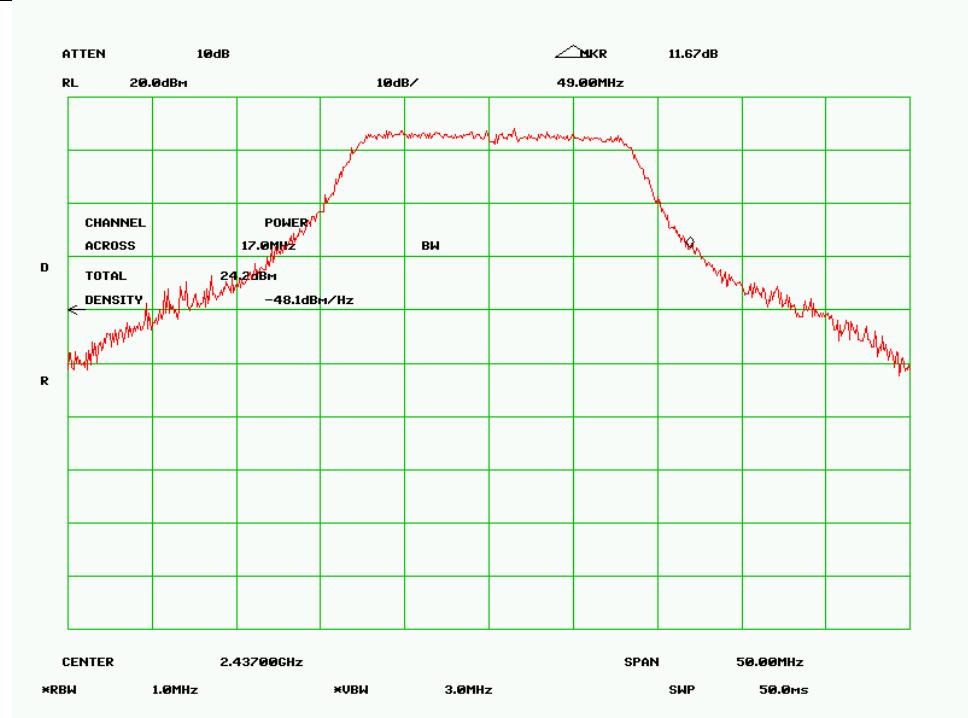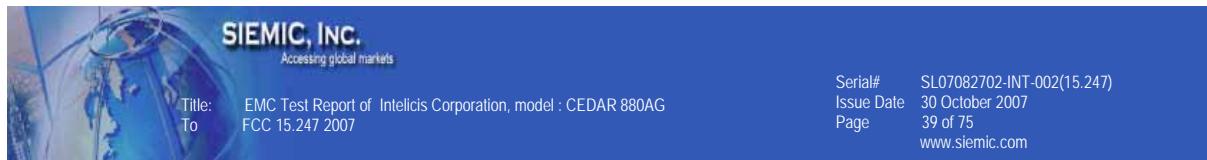


Output Power Mid Channel (802.11g)

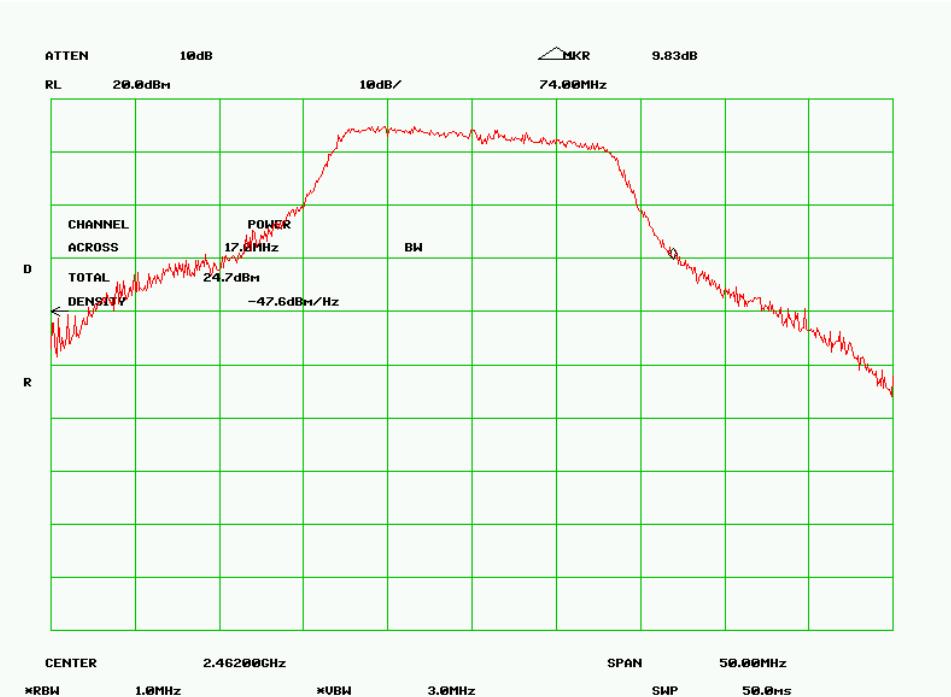


Output Power High Channel (802.11g)

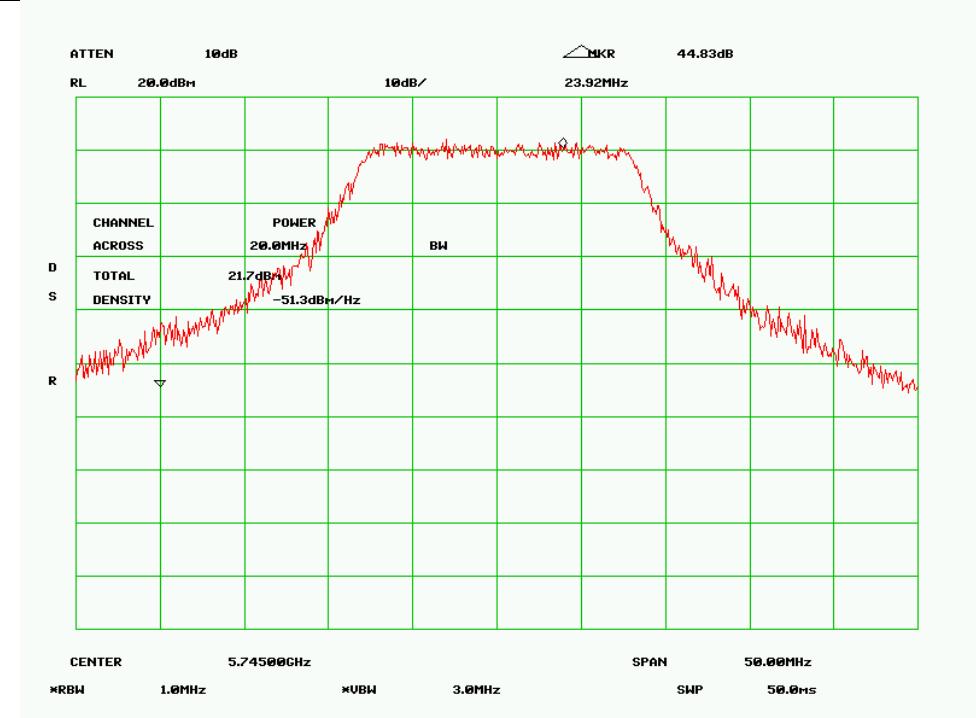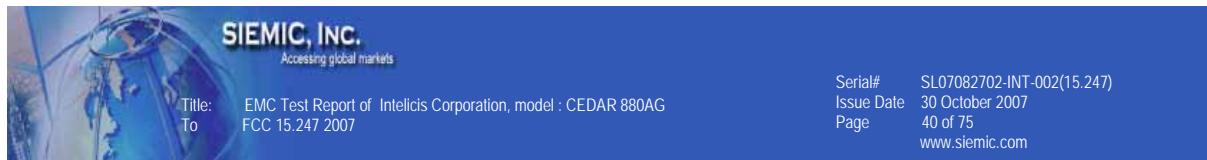

Output Power Low Channel (802.11a)

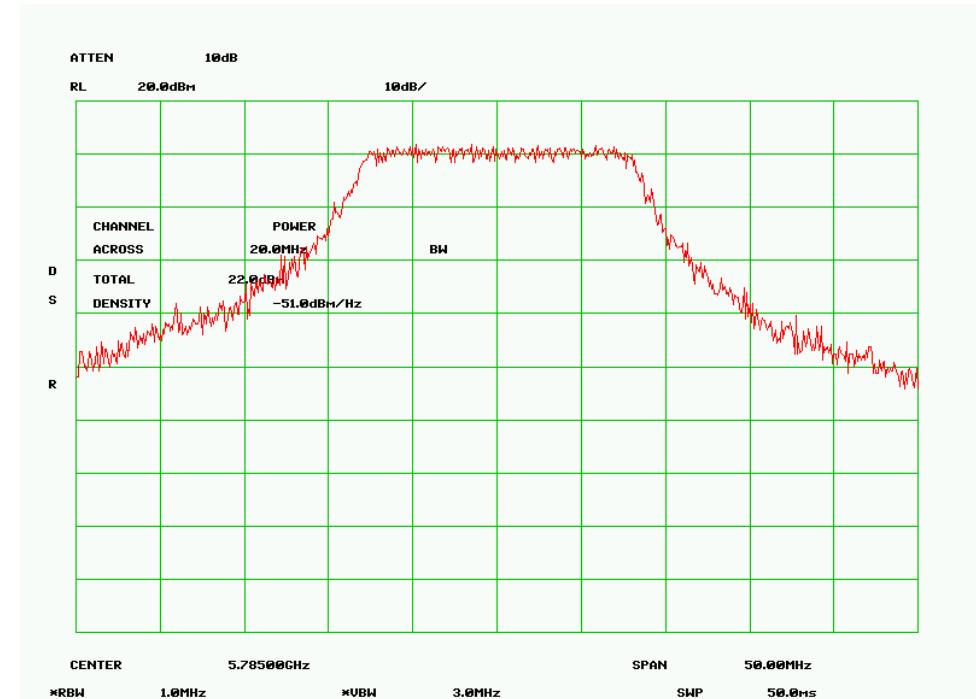

Output Power Mid Channel (802.11a)

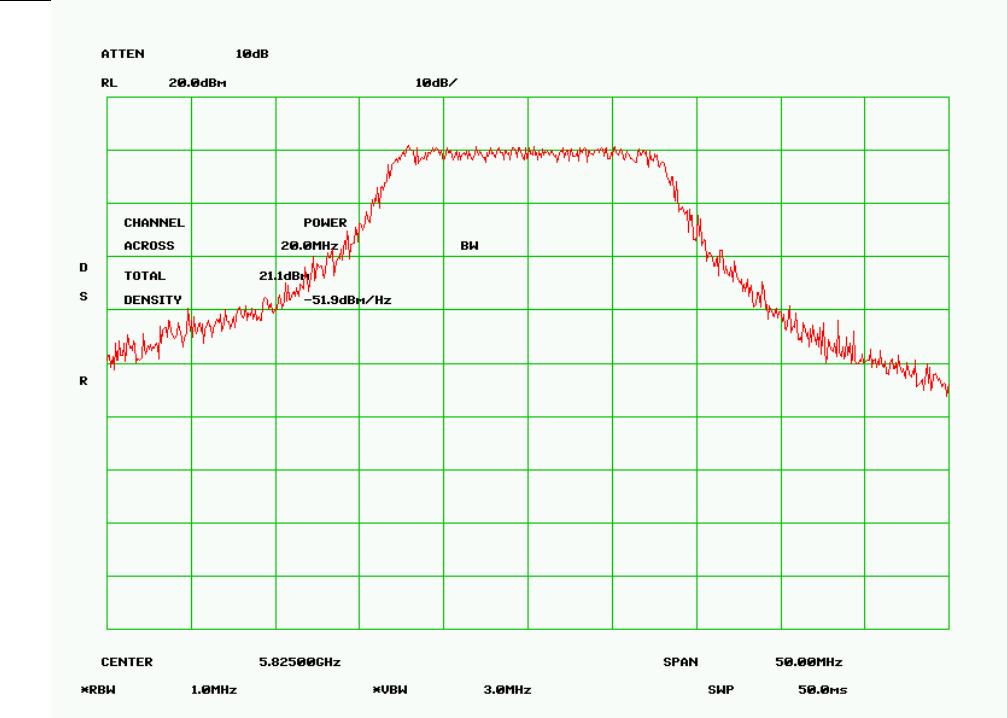

Output Power High Channel (802.11a)

5.3 Antenna Port Emission

1. Conducted Measurement

EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.

2 Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.

3 Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar


4 Test Date : October 02 2007


Tested By : Kent Kim

Standard Requirement : 47 CFR §15.247(d)


Procedures: The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels. The limit was determined by attenuating 20 dB of the RF peak power output

Test Result:

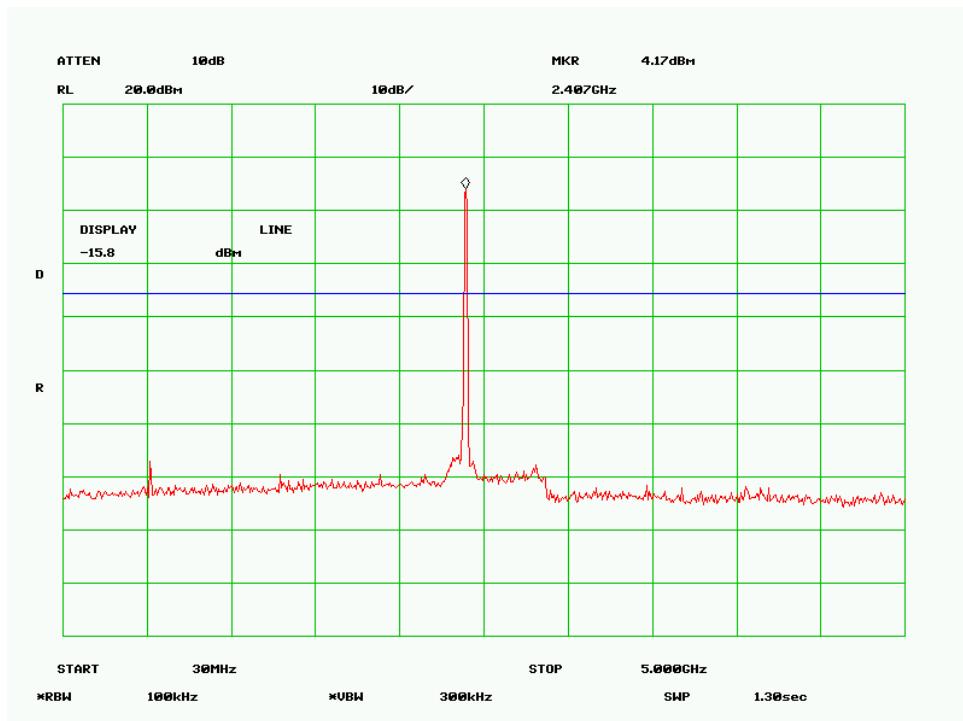


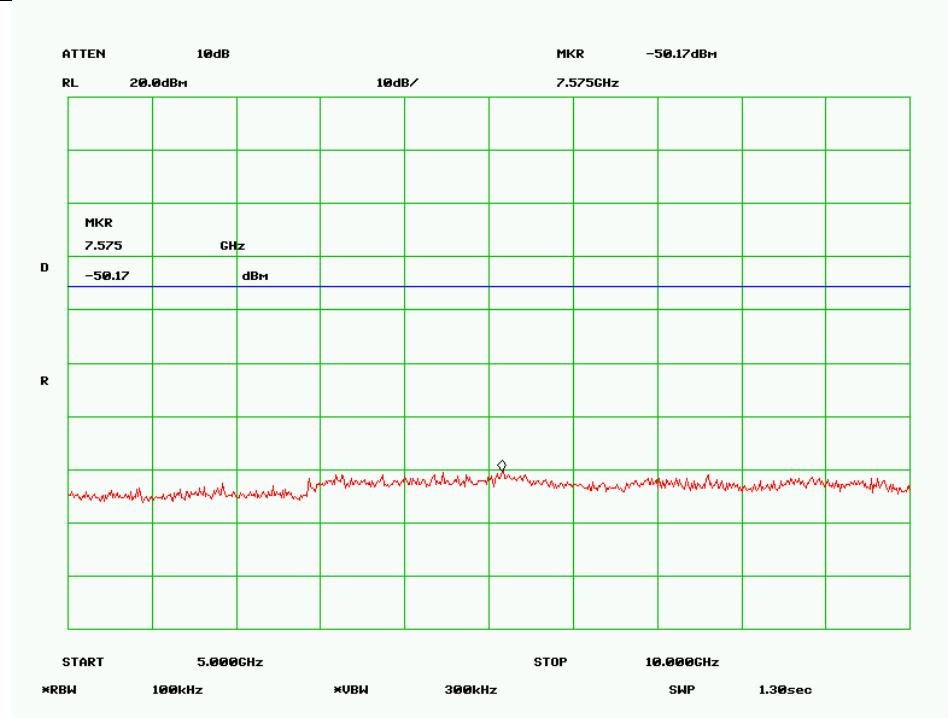


802.11b Low Channel -2

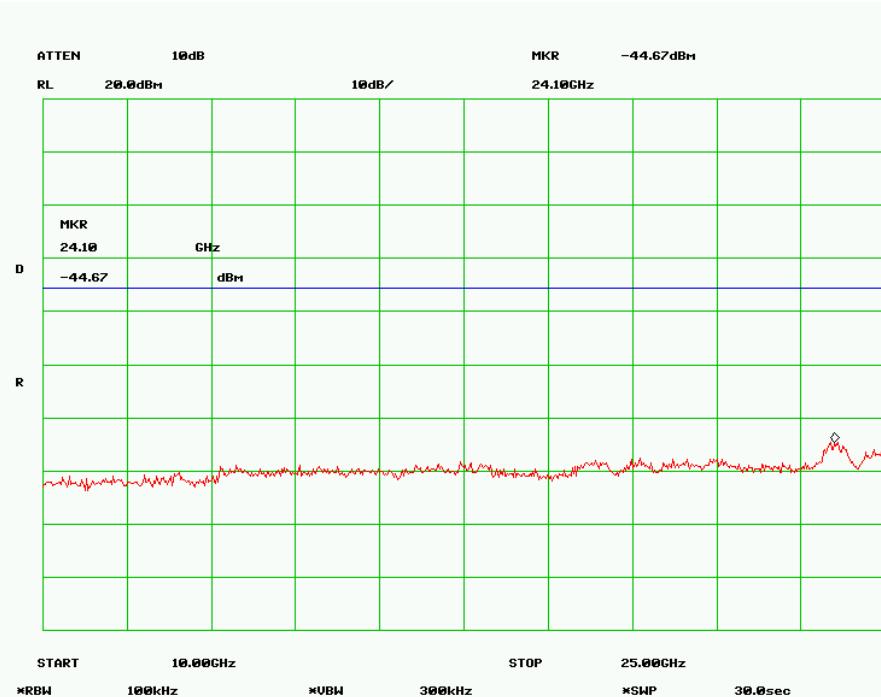


802.11b Low Channel -3

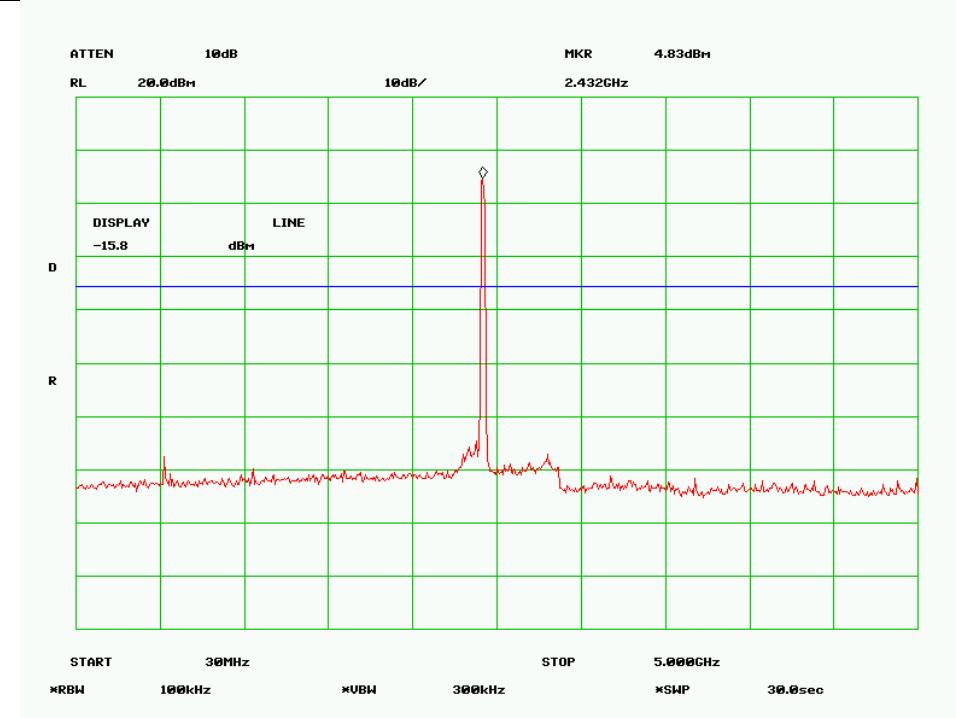


802.11b Mid Channel -1

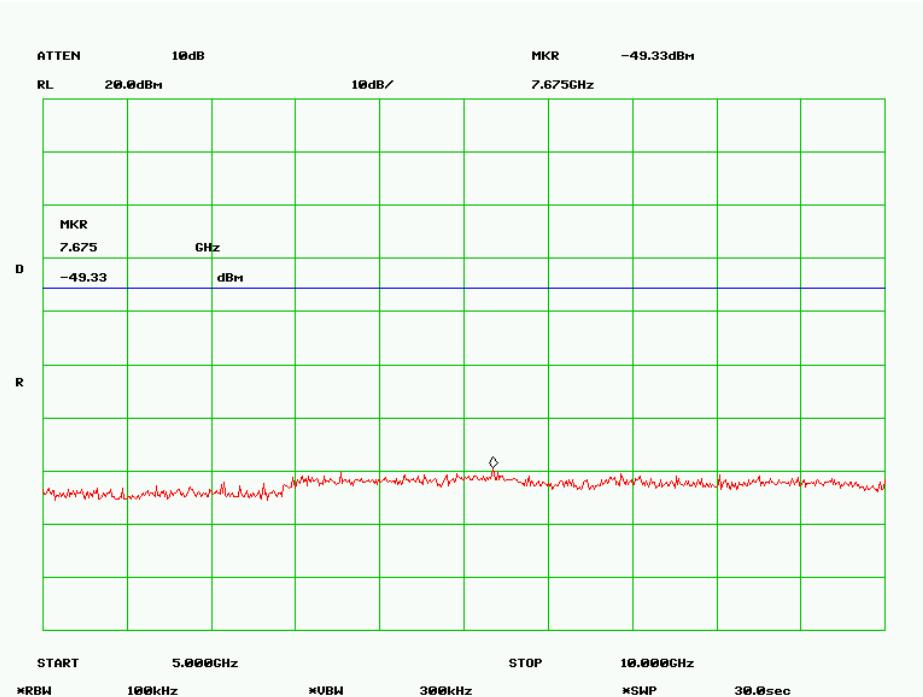



802.11b Mid Channel -2

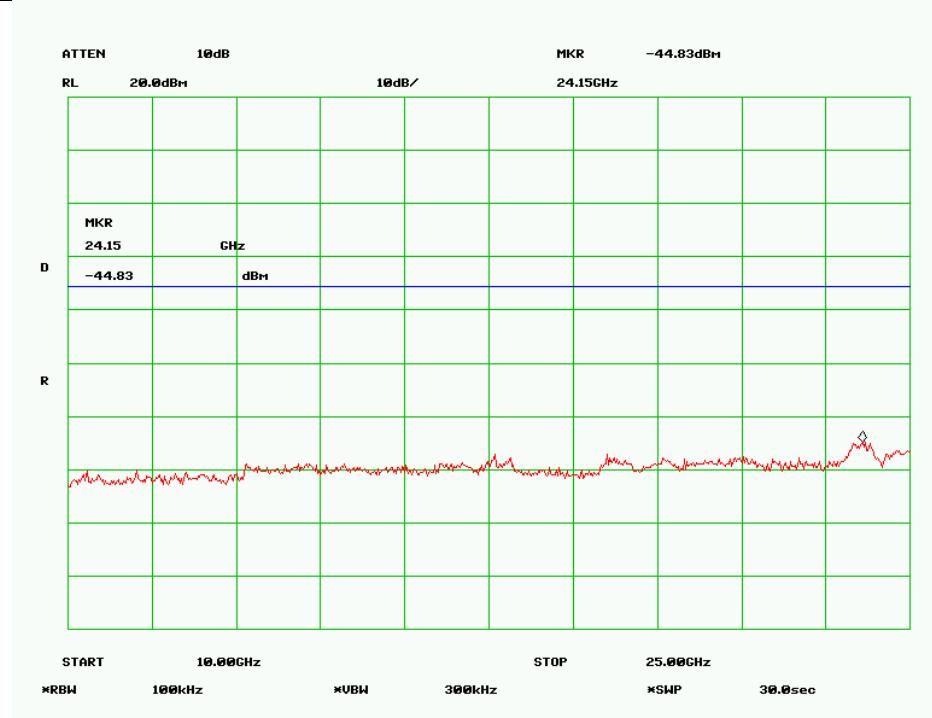

802.11b Mid Channel -3

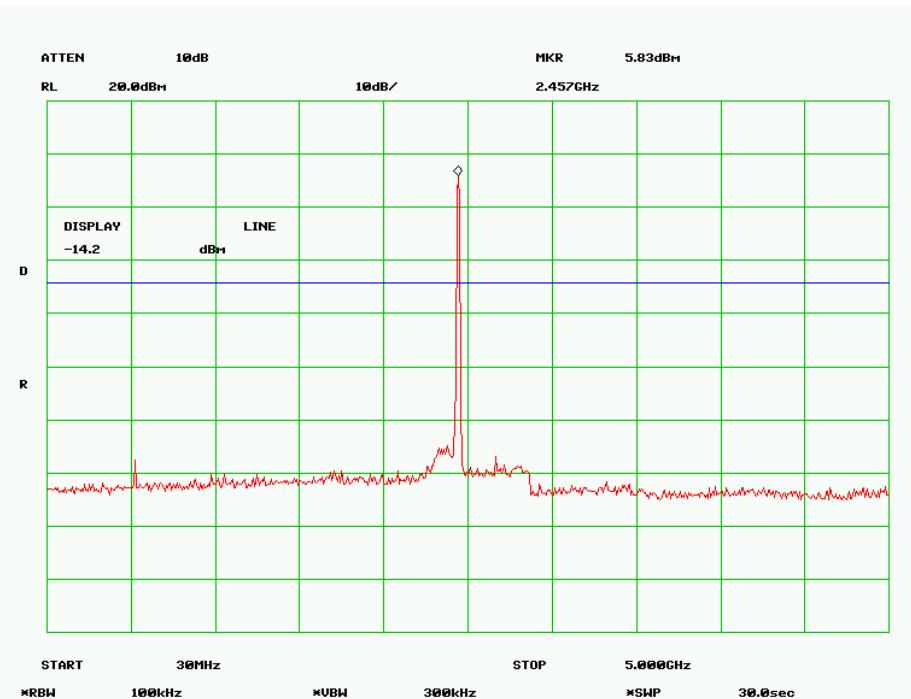


802.11b High Channel -1

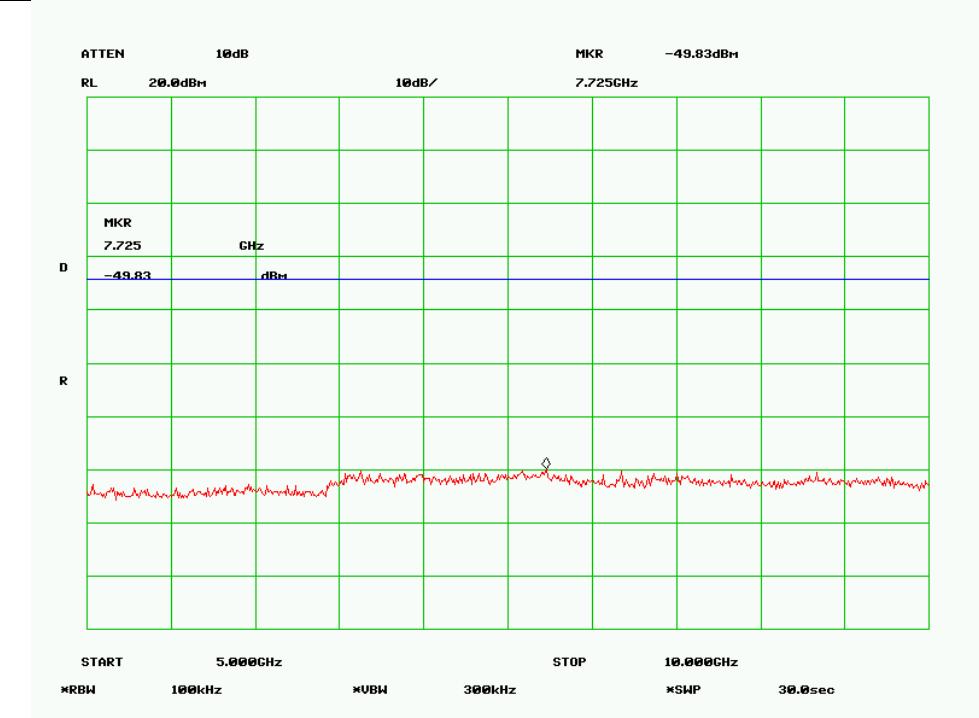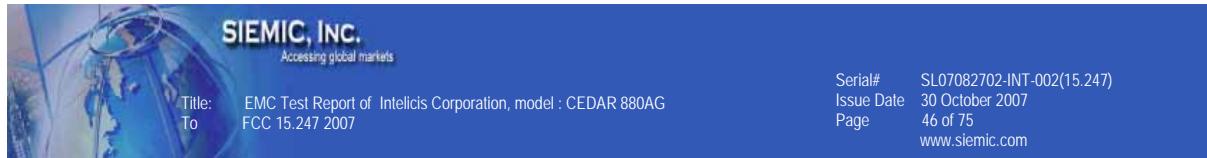


802.11b High Channel -2




802.11b High Channel -3

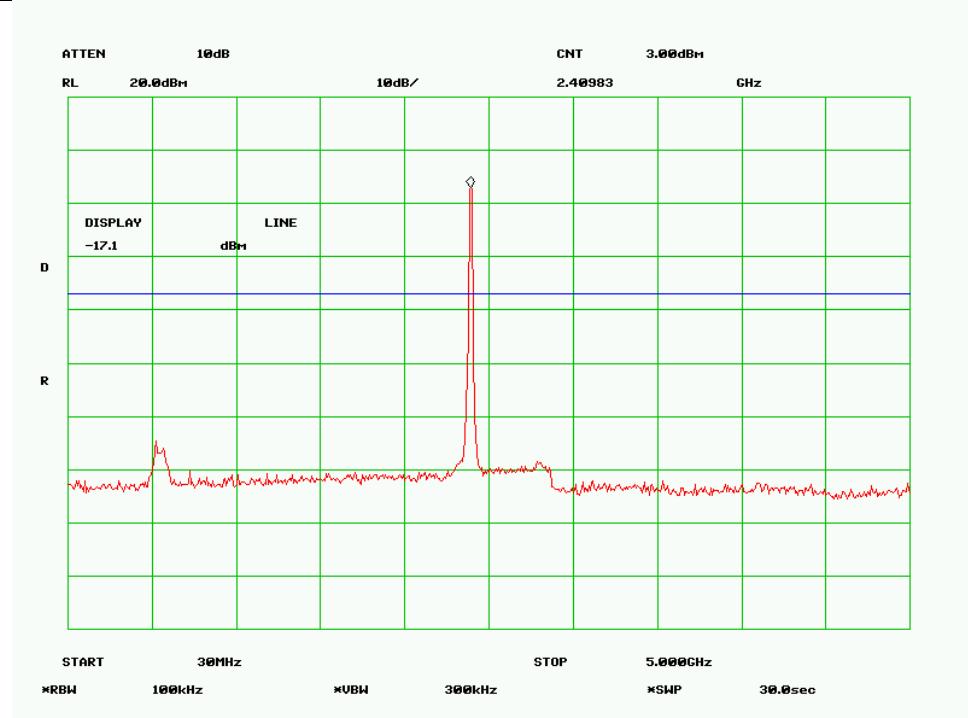


802.11g Low Channel -1

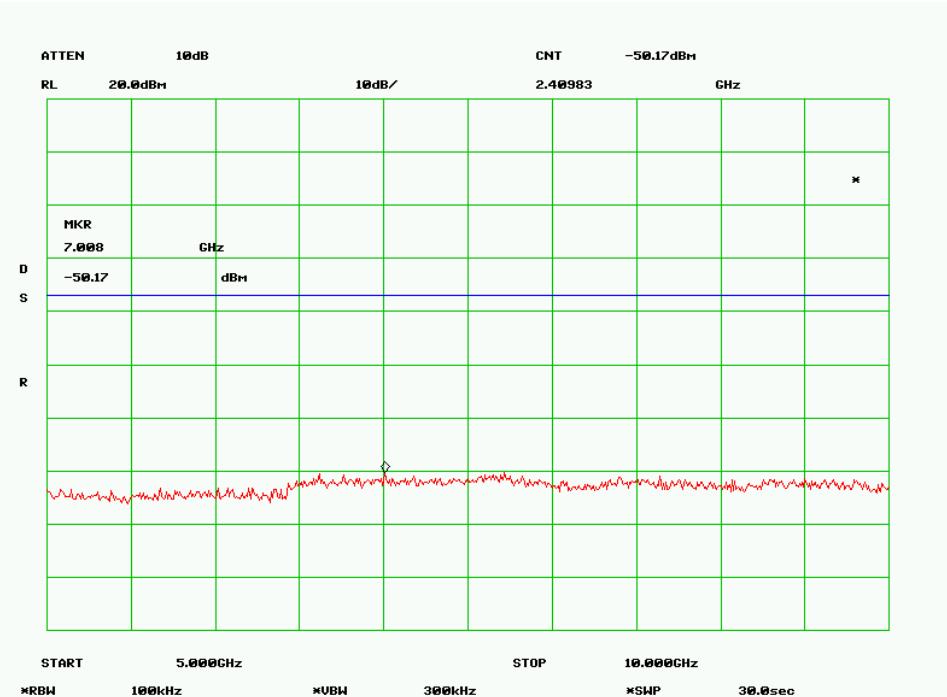


802.11g Low Channel -2

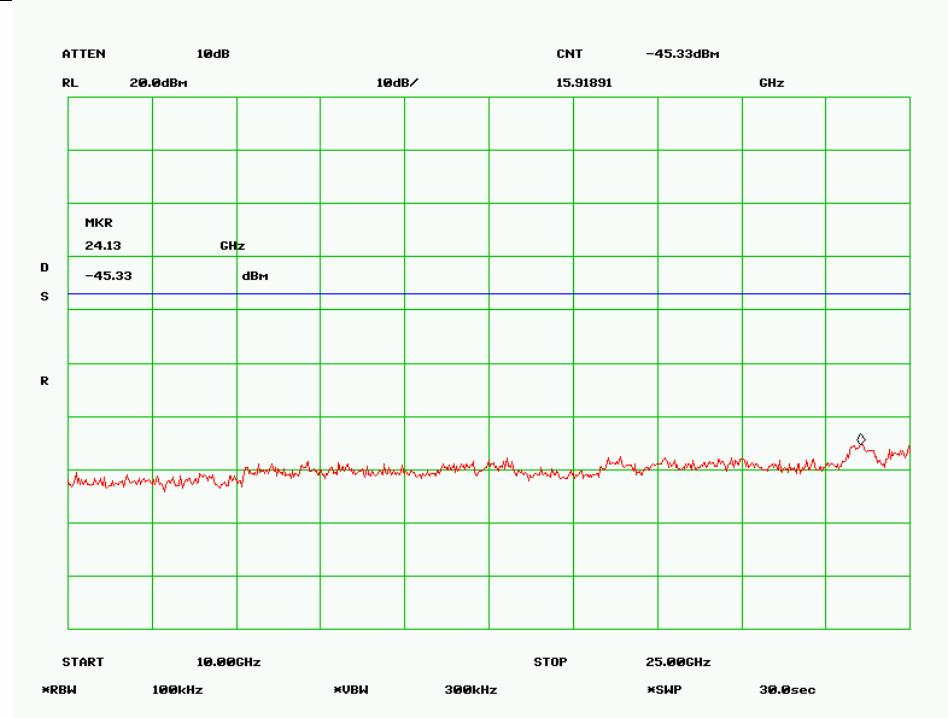


802.11g Low Channel -3

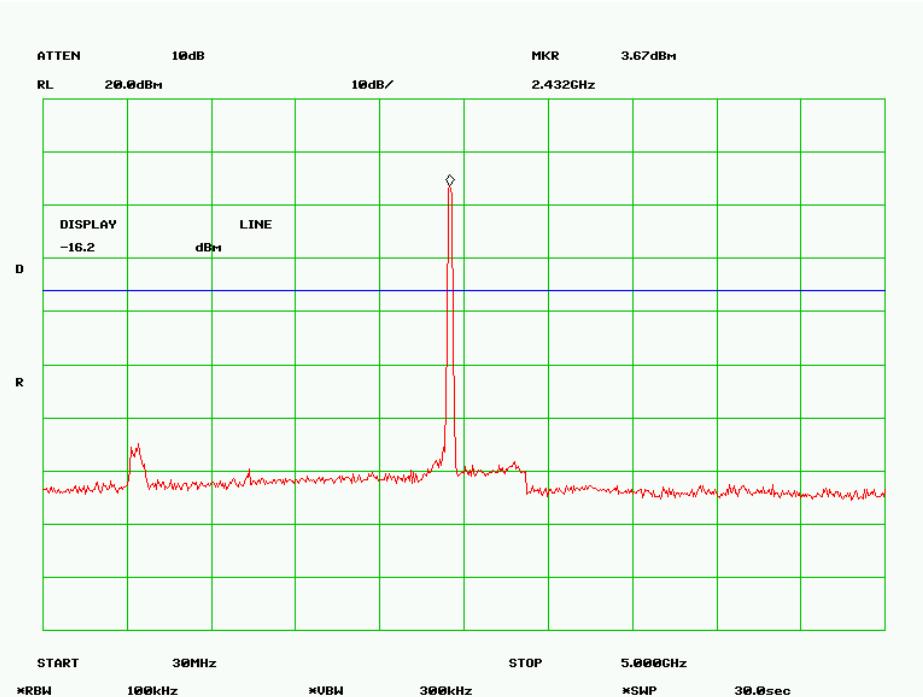


802.11g Mid Channel -1

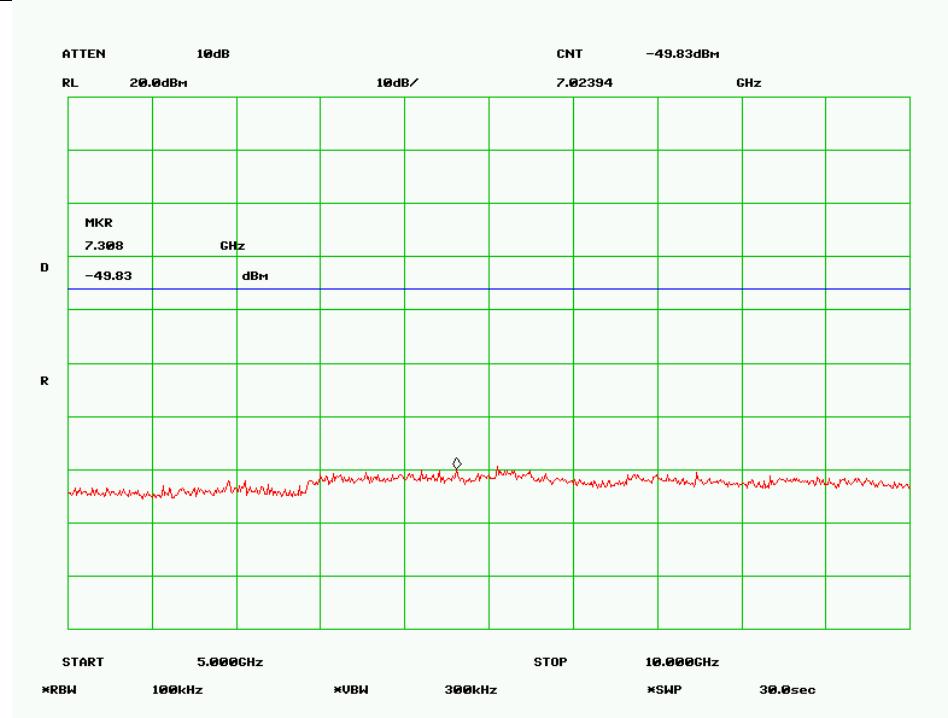


802.11g Mid Channel -2

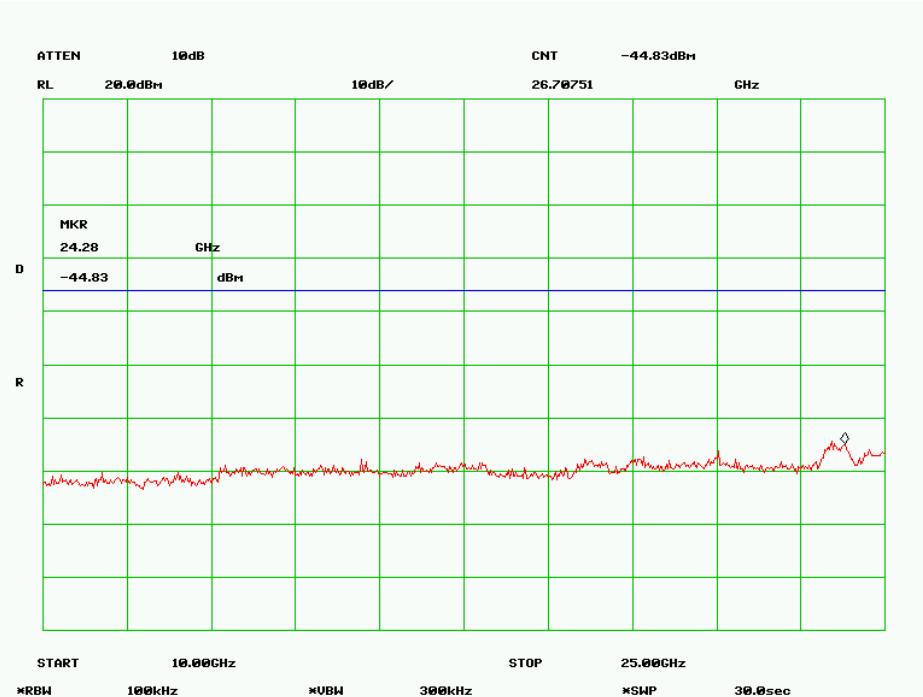


802.11g Mid Channel -3

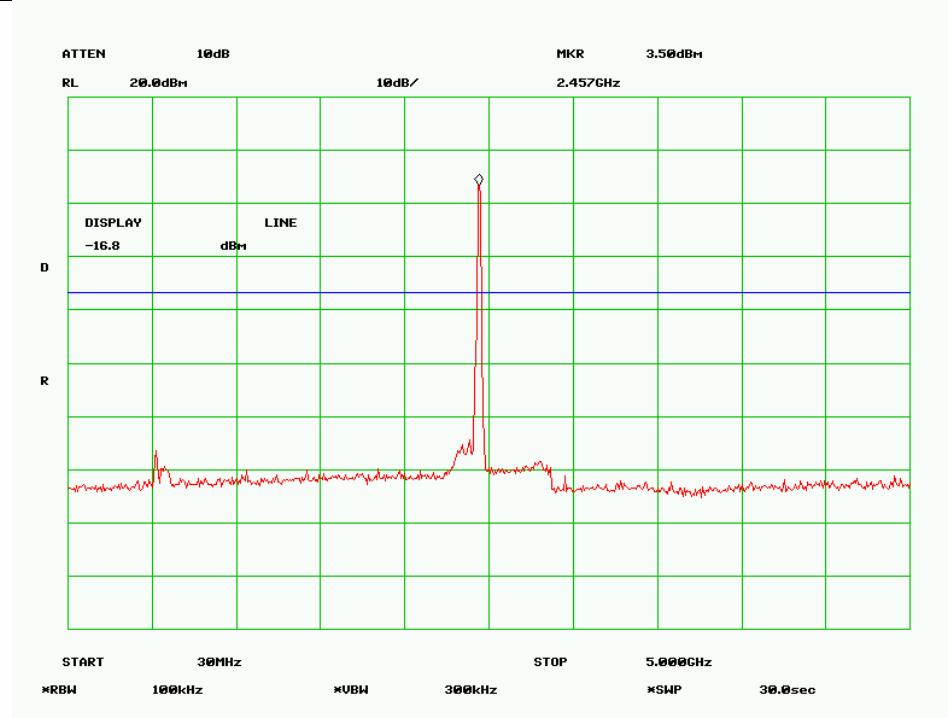


802.11g High Channel -1

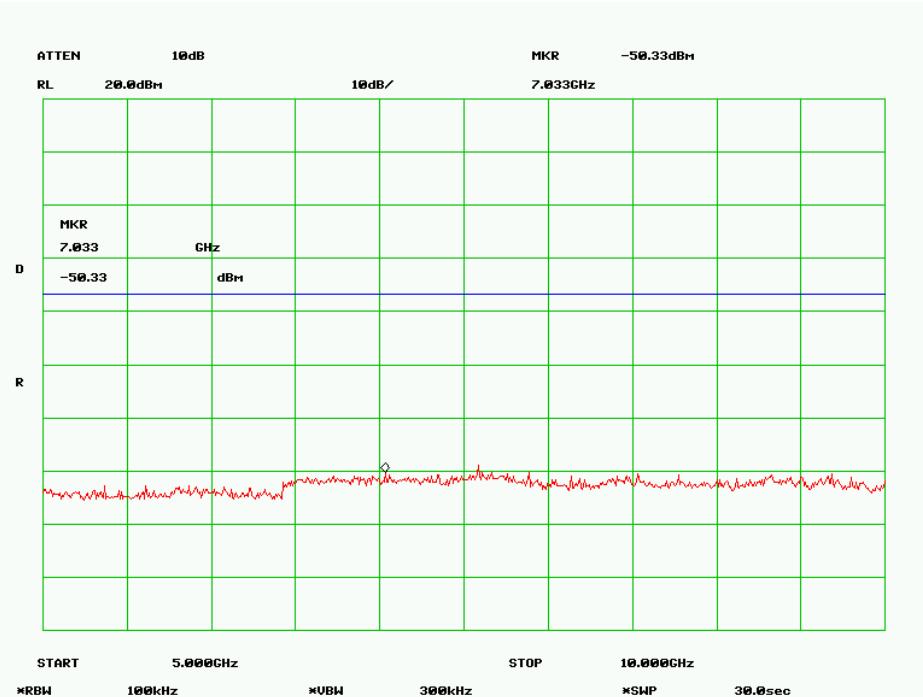



802.11g High Channel -2

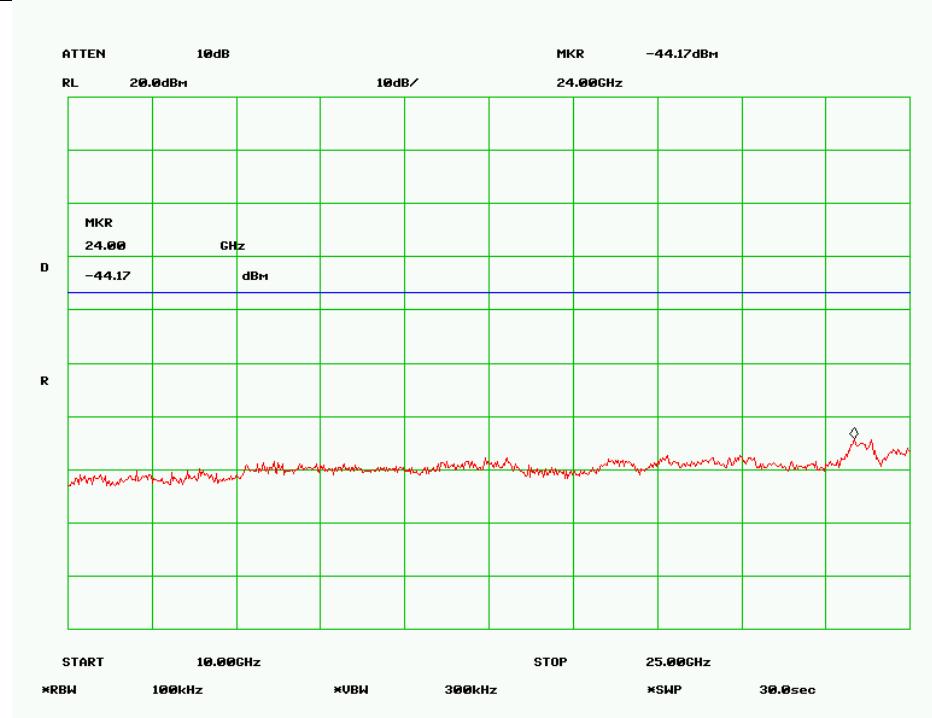


802.11g High Channel -3

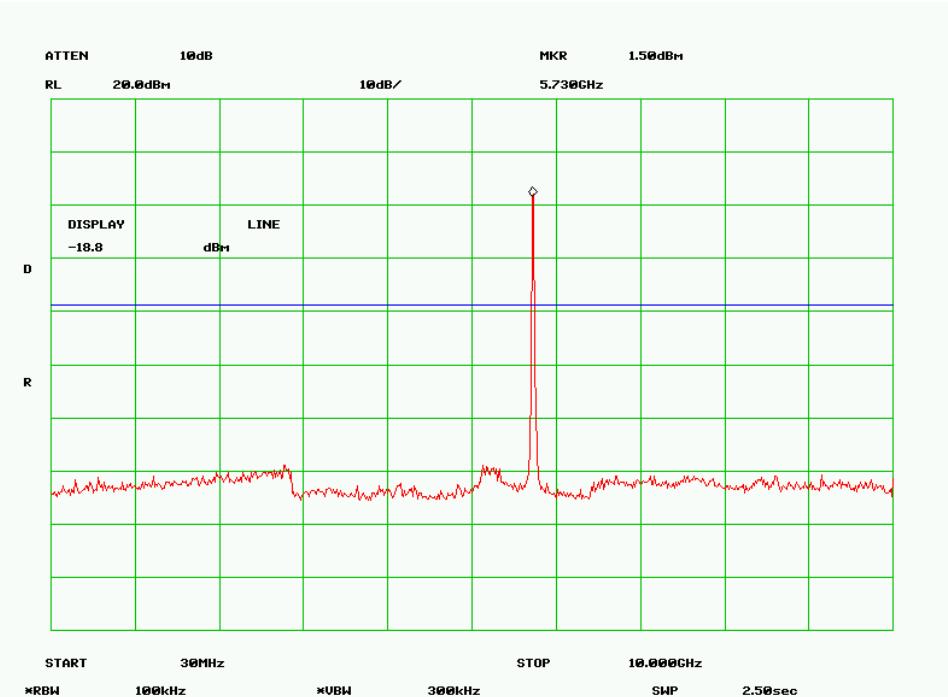



802.11a Low Channel -1

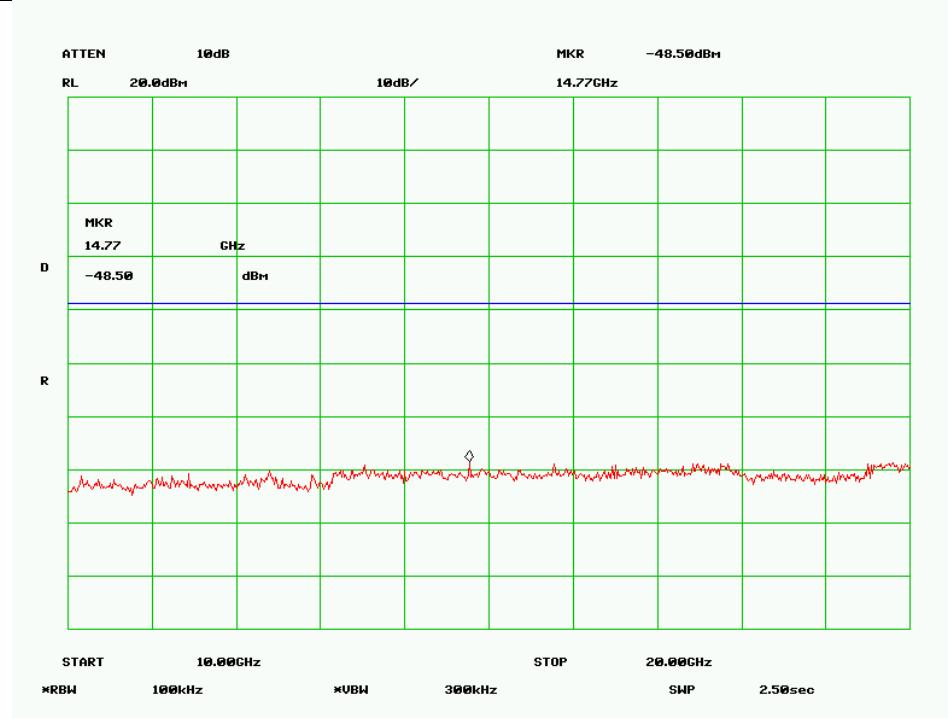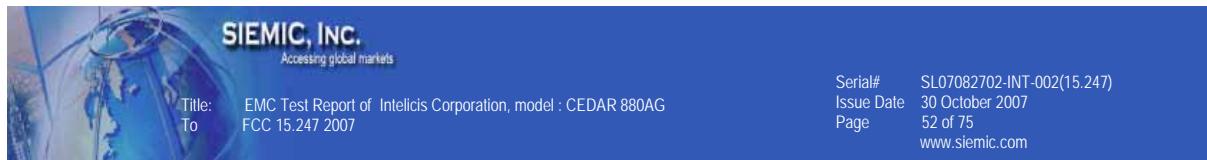


802.11a Low Channel -2

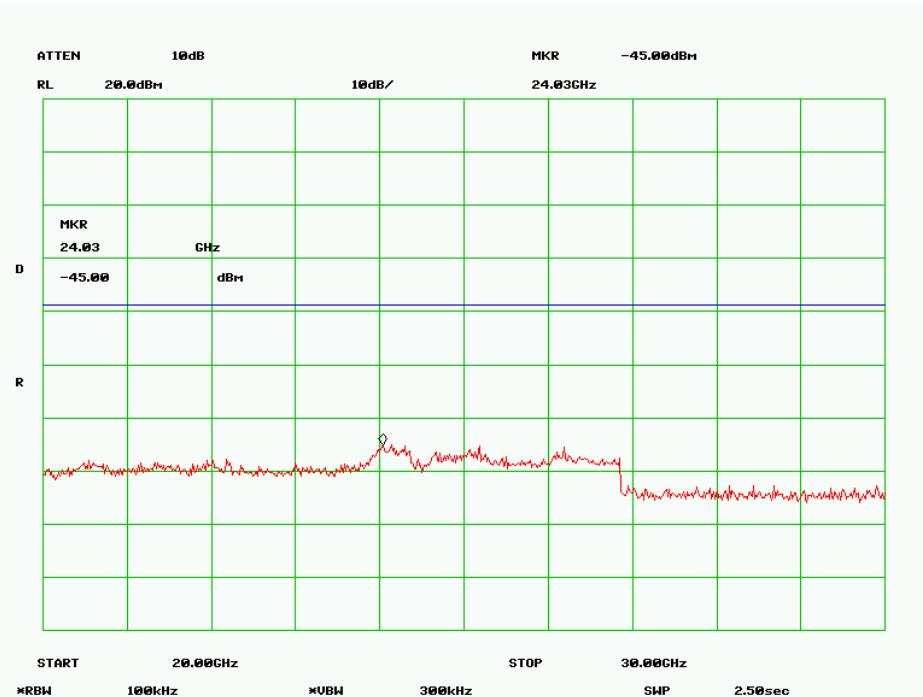



802.11a Low Channel -3

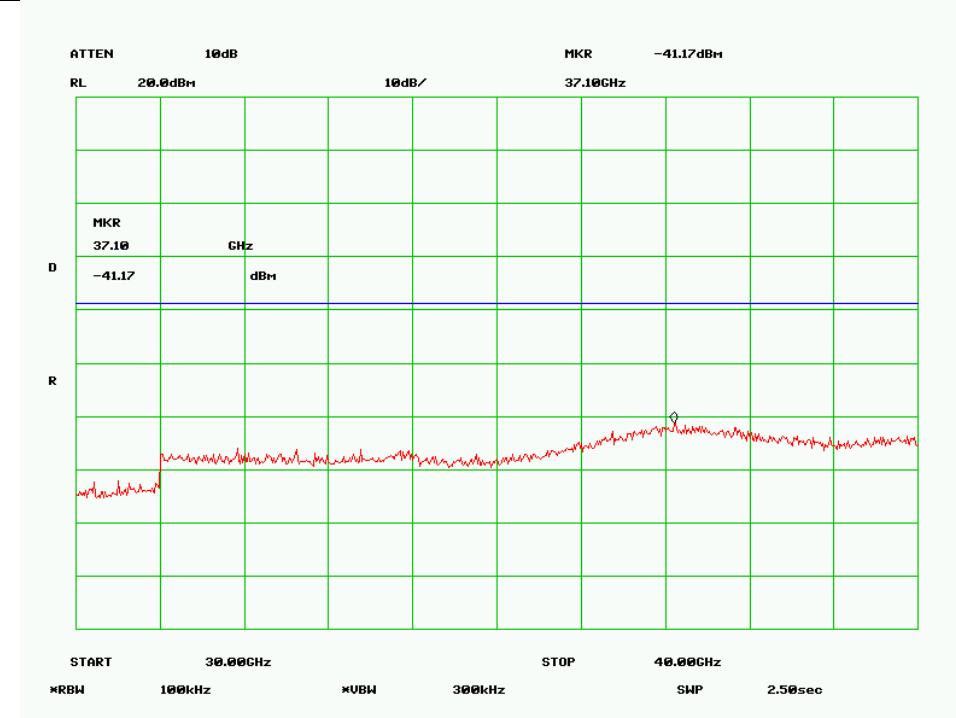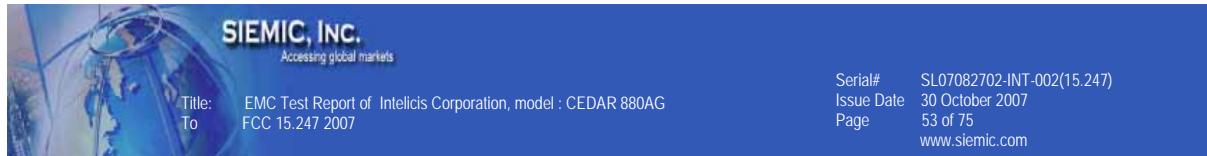


802.11a Low Channel -4

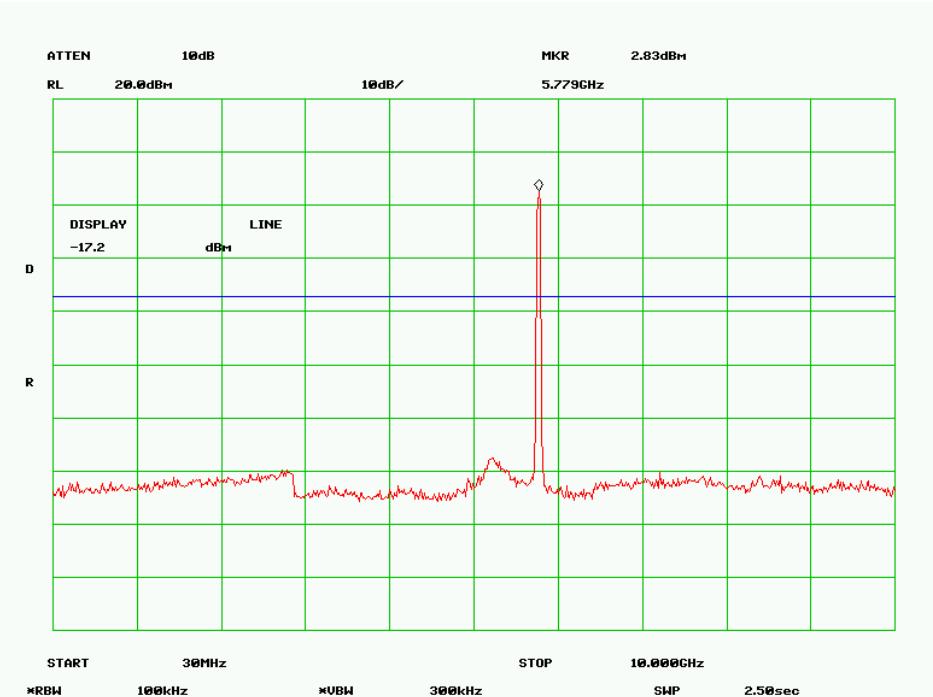


802.11a Mid Channel -1

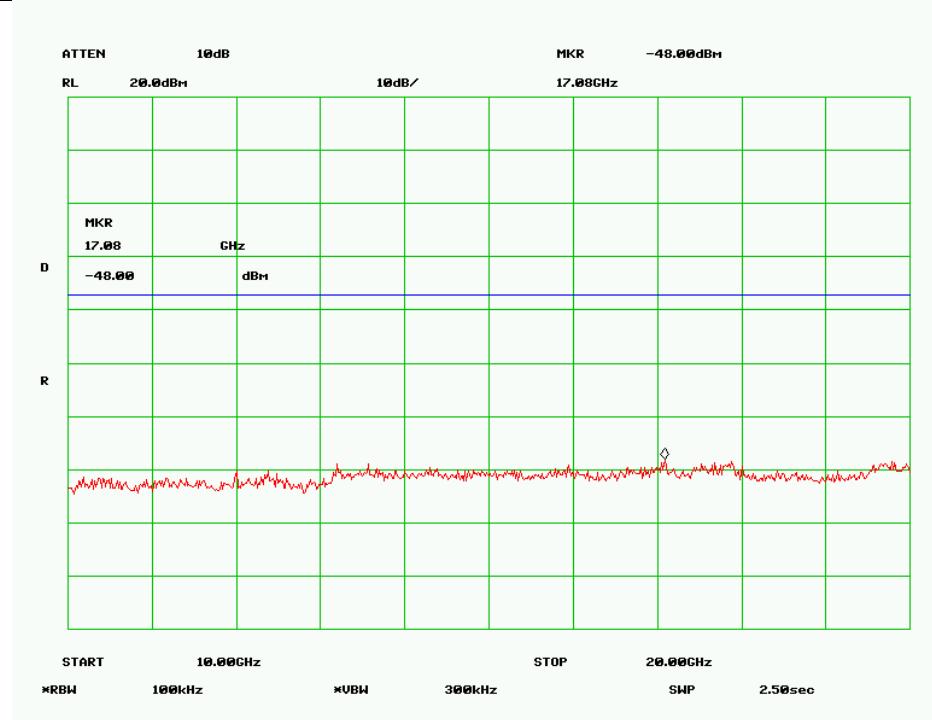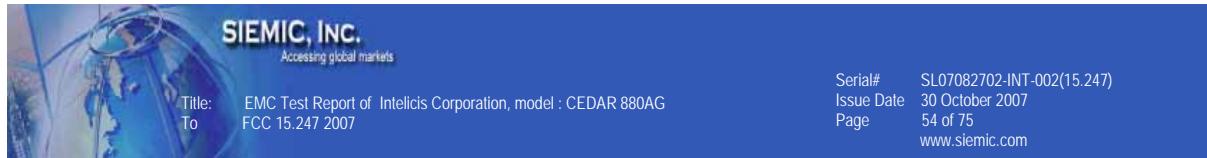


802.11a Mid Channel -2

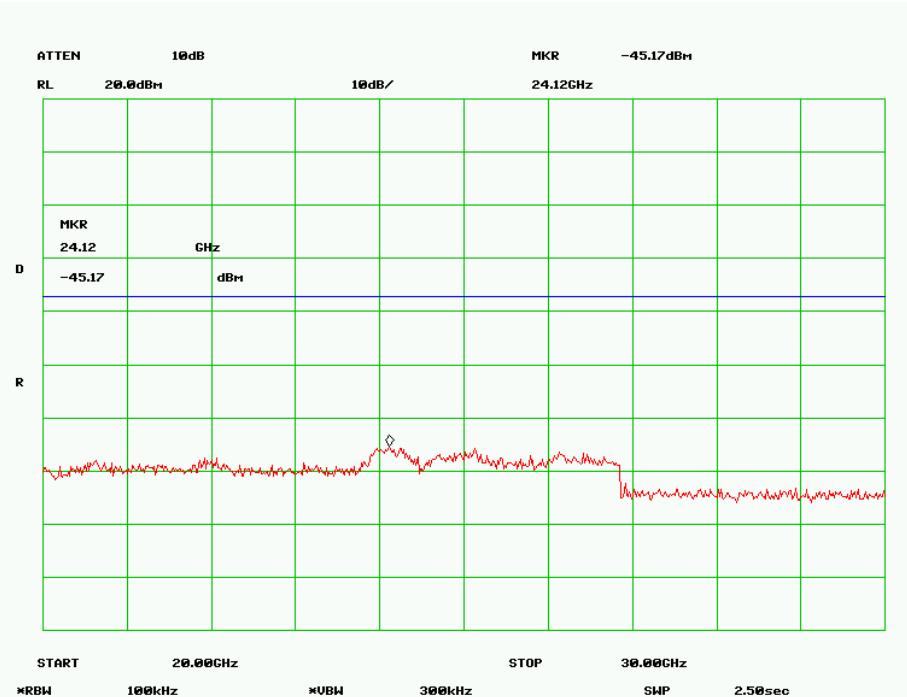



802.11a Mid Channel -3

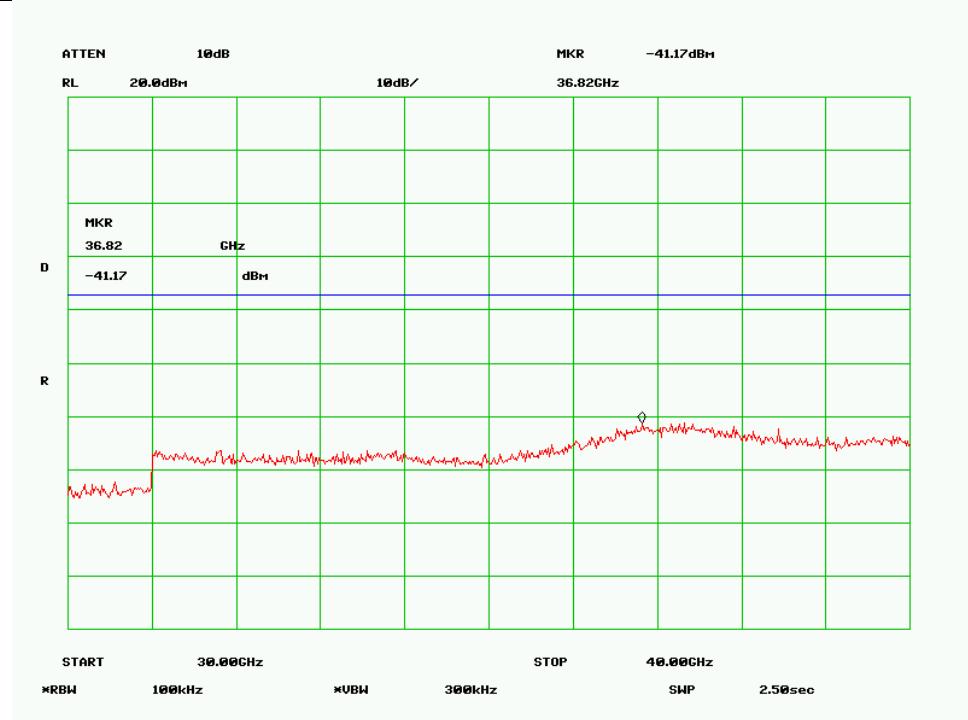


802.11a Mid Channel -4

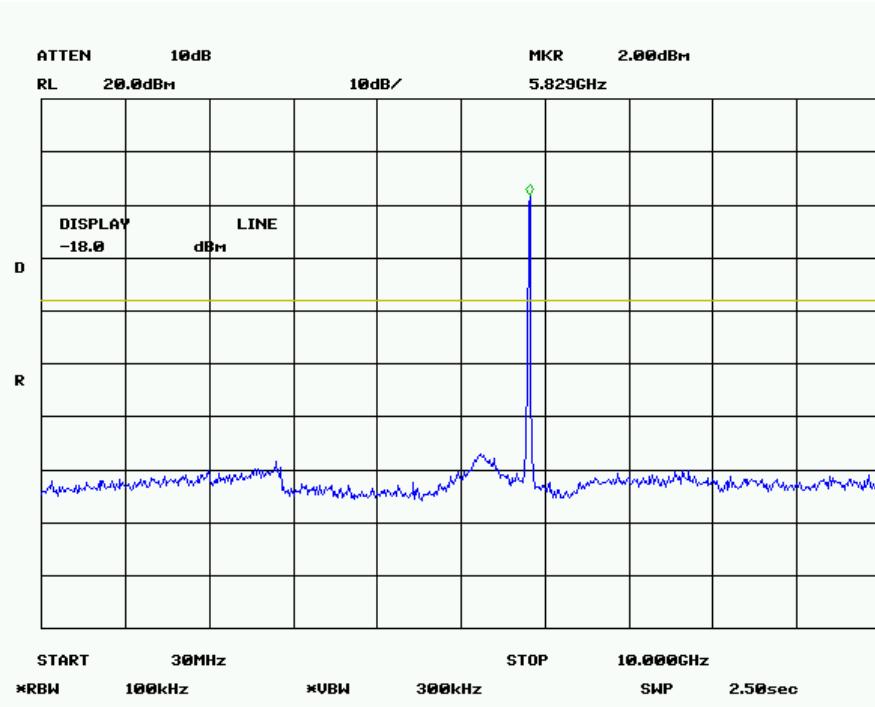


802.11a High Channel -1

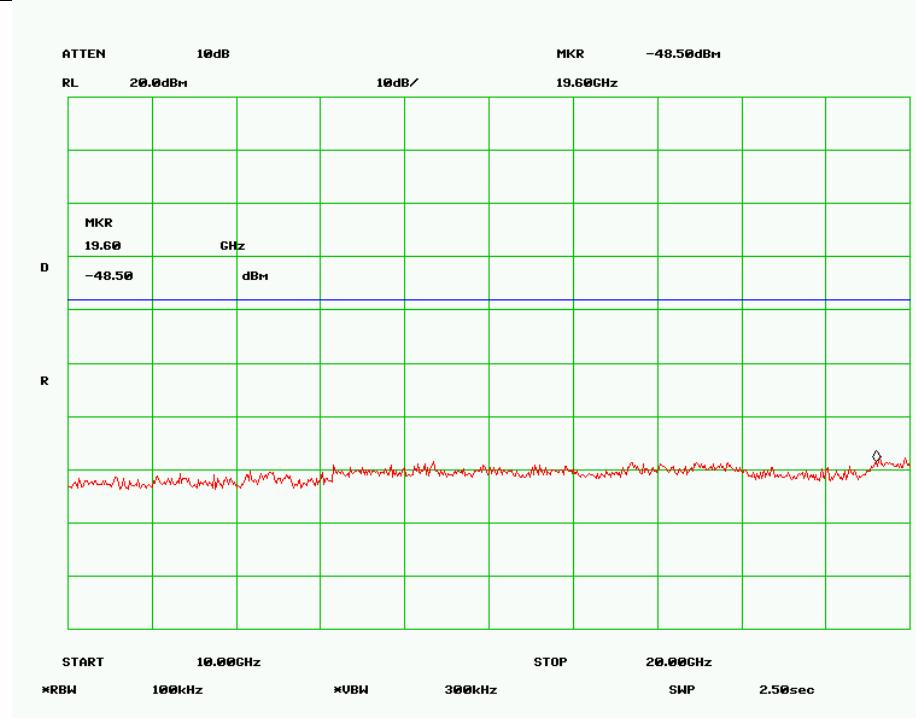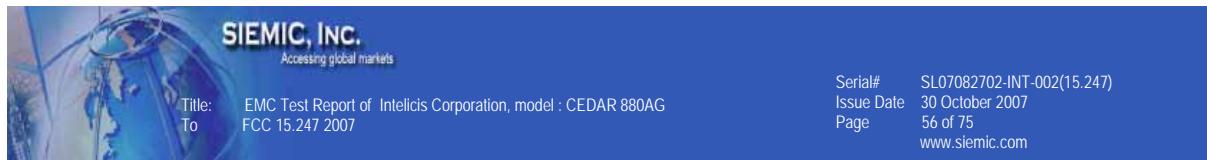

802.11a High Channel -2

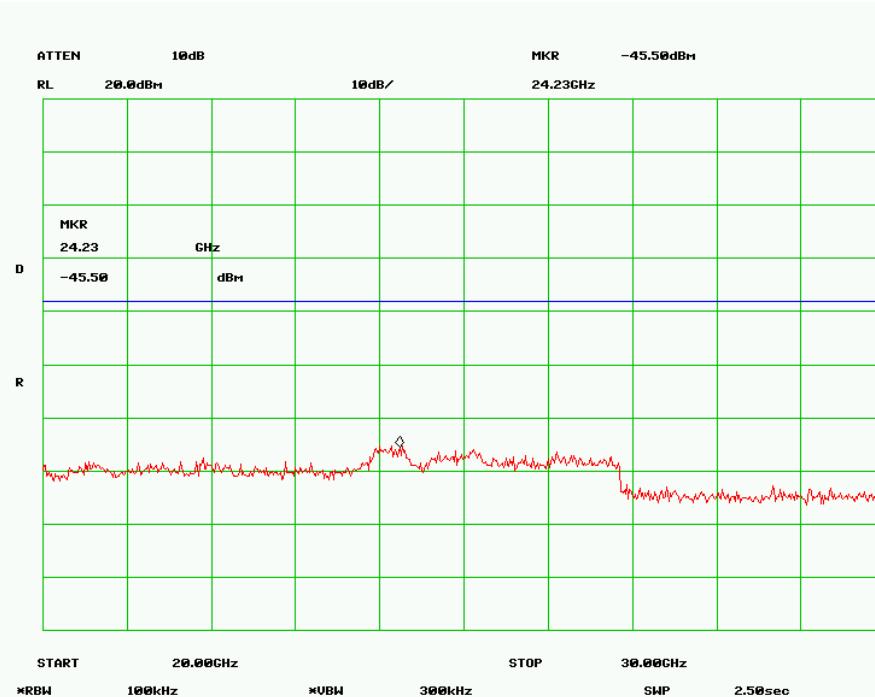

802.11a High Channel -3

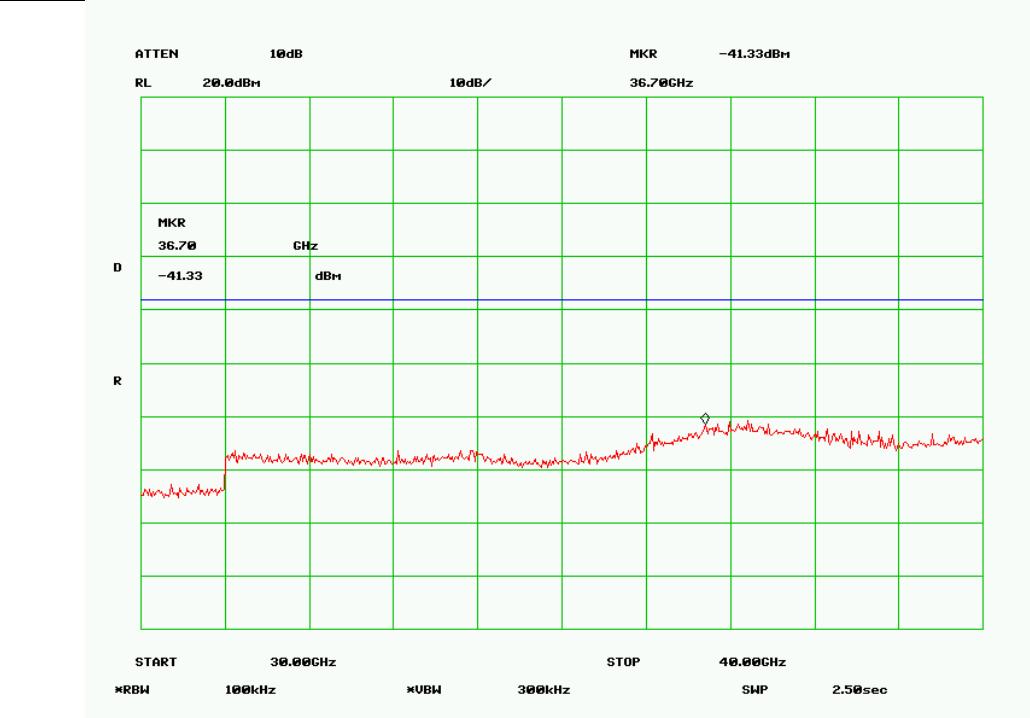

802.11a High Channel -4

5.4 Radiated Spurious Emission < 1GHz

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz (QP only @ 3m & 10m) is +5.6dB/-4.5dB (for EUTs < 0.5m X 0.5m X 0.5m).
4. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar

Test date : Oct 03 2007

Tested By : Kent Kim


Standard Requirement : 47 CFR §15.247(d)

Procedures: Radiated emissions were measured according to ANSI C63.4. The EUT was set to transmit at the highest output power. The EUT was set to transmit at mid channel. Note that setting the channel other than mid, the spurious emissions are the same.


The limit is converted from microvolts/meter to decibel microvolts/meter.

Sample Calculation: Corrected Amplitude = Raw Amplitude(dB μ V/m) + ACF(dB) + Cable Loss(dB)

Test Result:

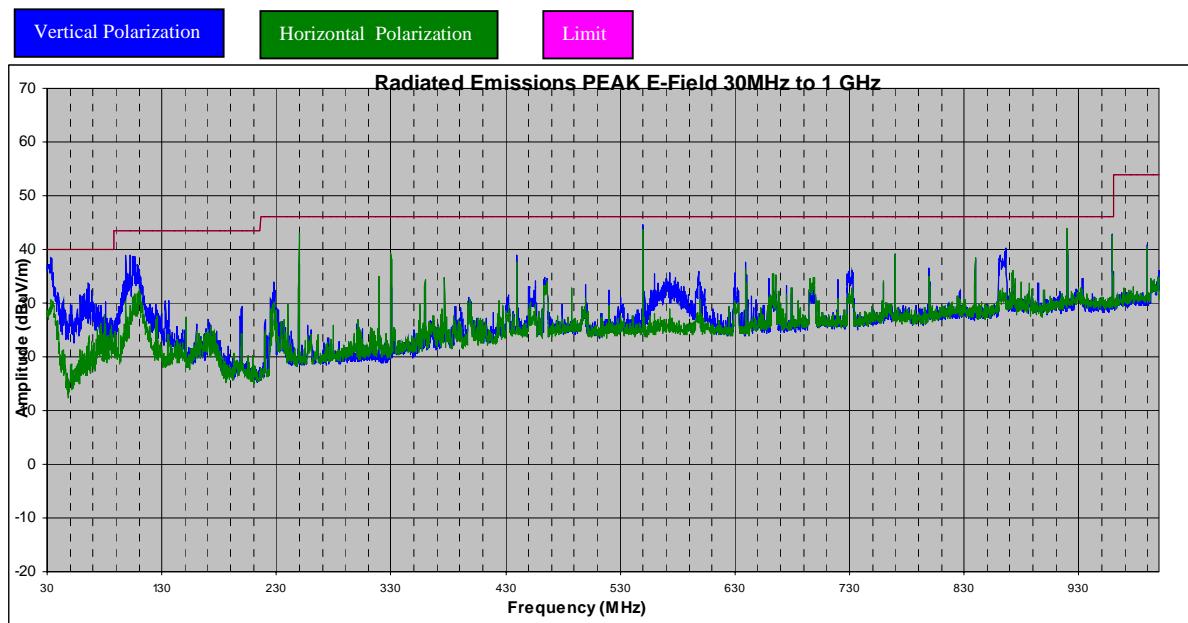

Radiated Emission Plot (Transmit Mode)

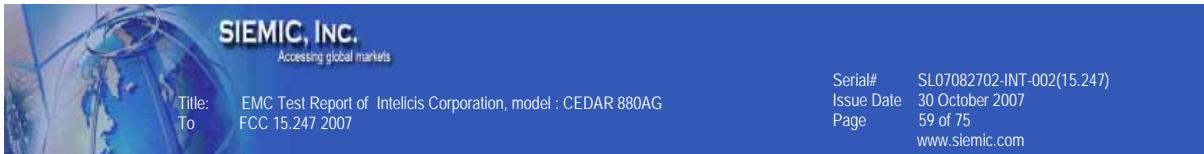

Radiated Emissions Data (Transmit Mode)

Frequency (MHz)	Azimuth (degrees)	Measure (Avg/QP)	Antenna Polarity (H/V)	Antenna Height (m)	Raw Amplitude @ 3m (dBuV/m)	ACF (dB)	CBL loss (dB)	Corrected Amplitude @ 3m (dBuV/m)	Limit @3m (dBuV/m)	Delta (dBuV/m)
33.78	0	QP	V	1	18.00	18.2	0.7	36.9	40	-3.10
106.90	0	QP	H	1	26.10	11.7	0.9	38.7	43.5	-4.80
250.00	180	QP	V	1	29.70	12.4	1.0	43.1	46	-2.90
550.00	0	QP	V	1	24.30	18.5	1.8	44.6	46	-1.40
920.00	270	QP	V	1	18.60	22.6	2.4	43.6	46	-2.40
960.00	0	QP	V	1	17.20	23	2.4	42.6	46	-3.40

5.5 Radiated Spurious Emissions > 1GHz

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 1GHz – 40GHz is +5.6dB/-4.5dB (for EUTs < 0.5m X 0.5m X 0.5m).
4. Environmental Conditions Temperature 23°C
 Relative Humidity 50%
 Atmospheric Pressure 1019mbar

Test date : Oct 04 2007

Tested By : Kent Kim


Standard Requirement : 47 CFR §15.247(d)

Procedures: Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 10Hz video bandwidth. The EUT was tested at low, mid and high with the highest output power. Investigated up to 10th harmonic of the operating frequency.

Sample Calculation:

EUT Field Strength = Raw Amplitude(dB μ V/m) – Amplifier Gain(dB) + Antenna Factor(dB) + Cable Loss(dB) + Filter Attenuation(dB, if used)

Test Result:

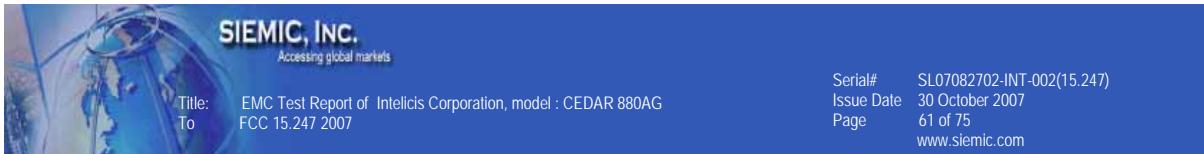


802.11b @ 2412Mhz @1 Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)	Remark
1.46	0	H	1.3	28.8	25.40	1.51	9.54	46.17	74.00	-27.83	PK	
1.46	0	H	1.3	13.2	25.40	1.51	9.54	30.57	54.00	-23.43	AVG	
1.46	90	V	1	31.6	25.40	1.51	9.54	48.97	74.00	-25.03	PK	
1.46	90	V	1	14.3	25.40	1.51	9.54	31.67	54.00	-22.33	AVG	
1.194	90	H	1.3	29	25.40	1.51	9.54	46.37	74.00	-27.63	PK	
1.194	90	H	1.3	13.4	25.40	1.51	9.54	30.77	54.00	-23.23	AVG	
1.194	90	V	1	33.3	25.40	1.51	9.54	50.67	74.00	-23.33	PK	
1.194	90	V	1	15.4	25.40	1.51	9.54	32.77	54.00	-21.23	AVG	
2.4	180	H	1	35.5	29.20	2.10	9.54	57.26	74.00	-16.74	PK	BANDEDGE
2.4	180	H	1	24.1	29.20	2.10	9.54	45.86	54.00	-8.14	AVG	BANDEDGE
2.4	0	V	1	39.1	29.20	2.10	9.54	60.86	74.00	-13.14	PK	BANDEDGE
2.4	0	V	1	27.7	29.20	2.10	9.54	49.46	54.00	-4.54	AVG	BANDEDGE
4.824	0	H	1.3	27.3	33.40	3.31	9.54	54.47	74.00	-19.53	PK	NOISE FLOOR
4.824	0	H	1.3	10.2	33.40	3.31	9.54	37.37	54.00	-16.63	AVG	NOISE FLOOR
4.824	90	V	1	27.7	33.40	3.31	9.54	54.87	74.00	-19.13	PK	NOISE FLOOR
4.824	90	V	1	10.1	33.40	3.31	9.54	37.27	54.00	-16.73	AVG	NOISE FLOOR
7.236	90	H	1.3	31.8	36.70	4.40	9.54	63.36	74.00	-10.64	PK	NOISE FLOOR
7.236	90	H	1.3	14.3	36.70	4.40	9.54	45.86	54.00	-8.14	AVG	NOISE FLOOR
7.236	90	V	1	32.6	36.70	4.40	9.54	64.16	74.00	-9.84	PK	NOISE FLOOR
7.236	90	V	1	14.5	36.70	4.40	9.54	46.06	54.00	-7.94	AVG	NOISE FLOOR

Emission was scanned up to 25GHz.

802.11b @ 2437Mhz @1 Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)	Remark
1.46	0	H	1.3	28.5	25.40	1.51	9.54	45.87	74.00	-28.13	PK	
1.46	0	H	1.3	12.8	25.40	1.51	9.54	30.17	54.00	-23.83	AVG	
1.46	90	V	1	30.5	25.40	1.51	9.54	47.87	74.00	-26.13	PK	
1.46	90	V	1	13.8	25.40	1.51	9.54	31.17	54.00	-22.83	AVG	
1.194	90	H	1.3	29.1	25.40	1.51	9.54	46.47	74.00	-27.53	PK	
1.194	90	H	1.3	13.5	25.40	1.51	9.54	30.87	54.00	-23.13	AVG	
1.194	90	V	1	33.1	25.40	1.51	9.54	50.47	74.00	-23.53	PK	
1.194	90	V	1	15.2	25.40	1.51	9.54	32.57	54.00	-21.43	AVG	
4.874	0	H	1.3	27.1	33.40	3.31	9.54	54.27	74.00	-19.73	PK	NOISE FLOOR
4.874	0	H	1.3	10.2	33.40	3.31	9.54	37.37	54.00	-16.63	AVG	NOISE FLOOR
4.874	90	V	1	31.5	33.40	3.31	9.54	58.67	74.00	-15.33	PK	NOISE FLOOR
4.874	90	V	1	10.2	33.40	3.31	9.54	37.37	54.00	-16.63	AVG	NOISE FLOOR
7.311	90	H	1.3	31.5	36.70	4.40	9.54	63.06	74.00	-10.94	PK	NOISE FLOOR
7.311	90	H	1.3	14.2	36.70	4.40	9.54	45.76	54.00	-8.24	AVG	NOISE FLOOR
7.311	90	V	1	30.3	36.70	4.40	9.54	61.86	74.00	-12.14	PK	NOISE FLOOR

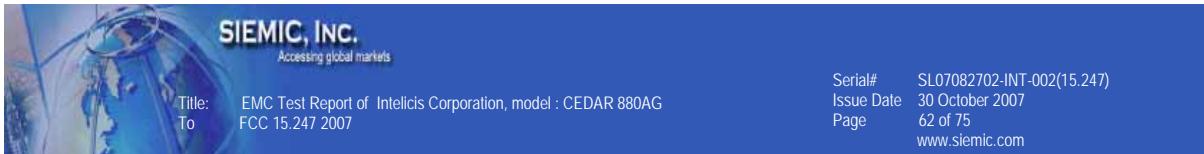

7.311	90	V	1	13.8	36.70	4.40	9.54	45.36	54.00	-8.64	AVG	NOISE FLOOR
-------	----	---	---	------	-------	------	------	-------	-------	-------	-----	-------------

Emission was scanned up to 25GHz.


802.11b @ 2462Mhz @1 Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector	Remark
1.46	0	H	1.3	28.5	25.40	1.51	9.54	45.87	74.00	-28.13	PK	
1.46	0	H	1.3	13	25.40	1.51	9.54	30.37	54.00	-23.63	AVG	
1.46	90	V	1	31.5	25.40	1.51	9.54	48.87	74.00	-25.13	PK	
1.46	90	V	1	14.1	25.40	1.51	9.54	31.47	54.00	-22.53	AVG	
1.194	90	H	1.3	29.5	25.40	1.51	9.54	46.87	74.00	-27.13	PK	
1.194	90	H	1.3	13.5	25.40	1.51	9.54	30.87	54.00	-23.13	AVG	
1.194	90	V	1	33.1	25.40	1.51	9.54	50.47	74.00	-23.53	PK	
1.194	90	V	1	15.1	25.40	1.51	9.54	32.47	54.00	-21.53	AVG	
2.4835	180	H	1	29.5	29.20	2.10	9.54	51.26	74.00	-22.74	PK	BANDEDGE
2.4835	180	H	1	27.5	29.20	2.10	9.54	49.26	54.00	-4.74	AVG	BANDEDGE
2.4835	0	V	1	29.6	29.20	2.10	9.54	51.36	74.00	-22.64	PK	BANDEDGE
2.4835	0	V	1	27.6	29.20	2.10	9.54	49.36	54.00	-4.64	AVG	BANDEDGE
4.924	0	H	1.3	29.5	33.40	3.31	9.54	56.67	74.00	-17.33	PK	NOISE FLOOR
4.924	0	H	1.3	10.1	33.40	3.31	9.54	37.27	54.00	-16.73	AVG	NOISE FLOOR
4.924	90	V	1	28.5	33.40	3.31	9.54	55.67	74.00	-18.33	PK	NOISE FLOOR
4.924	90	V	1	10	33.40	3.31	9.54	37.17	54.00	-16.83	AVG	NOISE FLOOR
7.386	90	H	1.3	31.9	36.70	4.40	9.54	63.46	74.00	-10.54	PK	NOISE FLOOR
7.386	90	H	1.3	14.5	36.70	4.40	9.54	46.06	54.00	-7.94	AVG	NOISE FLOOR
7.386	90	V	1	31.2	36.70	4.40	9.54	62.76	74.00	-11.24	PK	NOISE FLOOR
7.386	90	V	1	14.1	36.70	4.40	9.54	45.66	54.00	-8.34	AVG	NOISE FLOOR

Emission was scanned up to 25GHz.

802.11g @ 2412Mhz @1 Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector	Remark
1.46	0	H	1.3	28.51	25.40	1.51	9.54	45.88	74.00	-28.12	PK	
1.46	0	H	1.3	13.07	25.40	1.51	9.54	30.44	54.00	-23.56	AVG	
1.46	90	V	1	31.28	25.40	1.51	9.54	48.65	74.00	-25.35	PK	
1.46	90	V	1	14.16	25.40	1.51	9.54	31.53	54.00	-22.47	AVG	
1.194	90	H	1.3	28.71	25.40	1.51	9.54	46.08	74.00	-27.92	PK	
1.194	90	H	1.3	13.27	25.40	1.51	9.54	30.64	54.00	-23.36	AVG	
1.194	90	V	1	32.97	25.40	1.51	9.54	50.34	74.00	-23.66	PK	
1.194	90	V	1	15.25	25.40	1.51	9.54	32.62	54.00	-21.38	AVG	
2.4	180	H	1	36.50	29.20	2.10	9.54	58.26	74.00	-15.74	PK	BANDEDGE
2.4	180	H	1	24.60	29.20	2.10	9.54	46.36	54.00	-7.64	AVG	BANDEDGE
2.4	0	V	1	37.10	29.20	2.10	9.54	58.86	74.00	-15.14	PK	BANDEDGE
2.4	0	V	1	27.42	29.20	2.10	9.54	49.18	54.00	-4.82	AVG	BANDEDGE
4.824	0	H	1.3	27.03	33.40	3.31	9.54	54.20	74.00	-19.80	PK	NOISE FLOOR

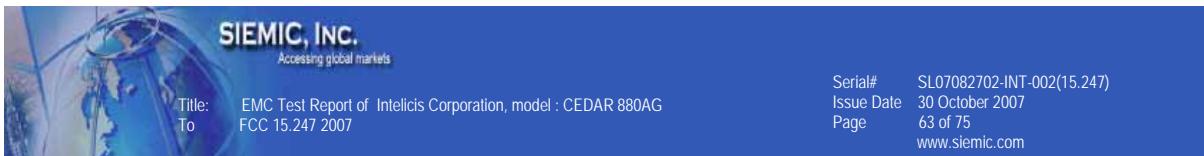

4.824	0	H	1.3	10.10	33.40	3.31	9.54	37.27	54.00	-16.73	AVG	NOISE FLOOR
4.824	90	V	1	27.42	33.40	3.31	9.54	54.59	74.00	-19.41	PK	NOISE FLOOR
4.824	90	V	1	10.00	33.40	3.31	9.54	37.17	54.00	-16.83	AVG	NOISE FLOOR
7.236	90	H	1.3	31.48	36.70	4.40	9.54	63.04	74.00	-10.96	PK	NOISE FLOOR
7.236	90	H	1.3	14.16	36.70	4.40	9.54	45.72	54.00	-8.28	AVG	NOISE FLOOR
7.236	90	V	1	32.27	36.70	4.40	9.54	63.83	74.00	-10.17	PK	NOISE FLOOR
7.236	90	V	1	14.36	36.70	4.40	9.54	45.92	54.00	-8.08	AVG	NOISE FLOOR

Emission was scanned up to 25GHz.


802.11g @ 2437Mhz @1 Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector	Remark
1.46	0	H	1.3	28.22	25.40	1.51	9.54	45.59	74.00	-28.42	PK	
1.46	0	H	1.3	12.67	25.40	1.51	9.54	30.04	54.00	-23.96	AVG	
1.46	90	V	1	30.20	25.40	1.51	9.54	47.57	74.00	-26.44	PK	
1.46	90	V	1	13.66	25.40	1.51	9.54	31.03	54.00	-22.97	AVG	
1.194	90	H	1.3	28.81	25.40	1.51	9.54	46.18	74.00	-27.82	PK	
1.194	90	H	1.3	13.37	25.40	1.51	9.54	30.74	54.00	-23.27	AVG	
1.194	90	V	1	32.77	25.40	1.51	9.54	50.14	74.00	-23.86	PK	
1.194	90	V	1	15.05	25.40	1.51	9.54	32.42	54.00	-21.58	AVG	
4.874	0	H	1.3	26.83	33.40	3.31	9.54	54.00	74.00	-20.00	PK	NOISE FLOOR
4.874	0	H	1.3	10.10	33.40	3.31	9.54	37.27	54.00	-16.73	AVG	NOISE FLOOR
4.874	90	V	1	31.19	33.40	3.31	9.54	58.36	74.00	-15.65	PK	NOISE FLOOR
4.874	90	V	1	10.10	33.40	3.31	9.54	37.27	54.00	-16.73	AVG	NOISE FLOOR
7.311	90	H	1.3	31.19	36.70	4.40	9.54	62.75	74.00	-11.26	PK	NOISE FLOOR
7.311	90	H	1.3	14.06	36.70	4.40	9.54	45.62	54.00	-8.38	AVG	NOISE FLOOR
7.311	90	V	1	30.00	36.70	4.40	9.54	61.56	74.00	-12.44	PK	NOISE FLOOR
7.311	90	V	1	13.66	36.70	4.40	9.54	45.22	54.00	-8.78	AVG	NOISE FLOOR

Emission was scanned up to 25GHz.

802.11g @ 2462Mhz @1 Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector	Remark
1.46	0	H	1.3	28.22	25.40	1.51	9.54	45.59	74.00	-28.42	PK	
1.46	0	H	1.3	12.87	25.40	1.51	9.54	30.24	54.00	-23.76	AVG	
1.46	90	V	1.0	31.19	25.40	1.51	9.54	48.56	74.00	-25.45	PK	
1.46	90	V	1.0	13.96	25.40	1.51	9.54	31.33	54.00	-22.67	AVG	
1.194	90	H	1.3	29.21	25.40	1.51	9.54	46.58	74.00	-27.43	PK	
1.194	90	H	1.3	13.37	25.40	1.51	9.54	30.74	54.00	-23.27	AVG	
1.194	90	V	1.0	32.77	25.40	1.51	9.54	50.14	74.00	-23.86	PK	
1.194	90	V	1.0	14.95	25.40	1.51	9.54	32.32	54.00	-21.68	AVG	

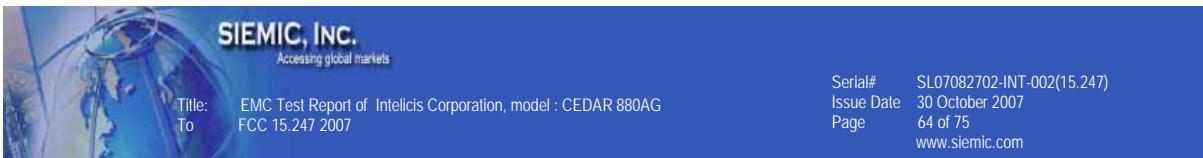

2.4835	180	H	1.0	29.21	29.20	2.10	9.54	50.97	74.00	-23.04	PK	BANDEDGE
2.4835	180	H	1.0	27.23	29.20	2.10	9.54	48.99	54.00	-5.02	AVG	BANDEDGE
2.4835	0	V	1.0	29.30	29.20	2.10	9.54	51.06	74.00	-22.94	PK	BANDEDGE
2.4835	0	V	1.0	27.32	29.20	2.10	9.54	49.08	54.00	-4.92	AVG	BANDEDGE
4.924	0	H	1.3	29.21	33.40	3.31	9.54	56.38	74.00	-17.63	PK	NOISE FLOOR
4.924	0	H	1.3	10.00	33.40	3.31	9.54	37.17	54.00	-16.83	AVG	NOISE FLOOR
4.924	90	V	1.0	28.22	33.40	3.31	9.54	55.39	74.00	-18.62	PK	NOISE FLOOR
4.924	90	V	1.0	9.90	33.40	3.31	9.54	37.07	54.00	-16.93	AVG	NOISE FLOOR
7.386	90	H	1.3	31.58	36.70	4.40	9.54	63.14	74.00	-10.86	PK	NOISE FLOOR
7.386	90	H	1.3	14.36	36.70	4.40	9.54	45.92	54.00	-8.08	AVG	NOISE FLOOR
7.386	90	V	1.0	30.89	36.70	4.40	9.54	62.45	74.00	-11.55	PK	NOISE FLOOR
7.386	90	V	1.0	13.96	36.70	4.40	9.54	45.52	54.00	-8.48	AVG	NOISE FLOOR

Emission was scanned up to 25GHz.


802.11a @ 5745Mhz @1 Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)	Remark
1.46	0	H	1.3	28.69	25.40	1.51	9.54	46.06	74.00	-27.94	PK	
1.46	0	H	1.3	13.09	25.40	1.51	9.54	30.46	54.00	-23.54	AVG	
1.46	90	V	1.0	31.49	25.40	1.51	9.54	48.86	74.00	-25.14	PK	
1.46	90	V	1.0	14.19	25.40	1.51	9.54	31.56	54.00	-22.44	AVG	
1.194	90	H	1.3	28.89	25.40	1.51	9.54	46.26	74.00	-27.74	PK	
1.194	90	H	1.3	13.29	25.40	1.51	9.54	30.66	54.00	-23.34	AVG	
1.194	90	V	1.0	33.19	25.40	1.51	9.54	50.56	74.00	-23.44	PK	
1.194	90	V	1.0	15.29	25.40	1.51	9.54	32.66	54.00	-21.34	AVG	
5.725	90	H	1.3	33.2	34.70	3.80	9.54	62.16	74.00	-11.84	PK	Bandedge
5.725	90	H	1.3	10.5	34.70	3.80	9.54	39.46	54.00	-14.54	AVG	Bandedge
5.725	90	V	1.0	31.2	34.70	3.80	9.54	60.16	74.00	-13.84	PK	Bandedge
5.725	90	V	1.0	10.6	34.70	3.80	9.54	39.56	54.00	-14.44	AVG	Bandedge
11.49	0	H	1.3	27.5	40.80	5.81	9.54	64.57	74.00	-9.43	PK	NOISE FLOOR
11.49	0	H	1.3	13.5	40.80	5.81	9.54	50.57	54.00	-3.43	AVG	NOISE FLOOR
11.49	90	V	1.0	27.7	40.80	5.81	9.54	64.77	74.00	-9.23	PK	NOISE FLOOR
11.49	90	V	1.0	13.4	40.80	5.81	9.54	50.47	54.00	-3.53	AVG	NOISE FLOOR

Emission was scanned up to 40GHz.

802.11a @ 5785Mhz @1 Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)	Remark
1.46	0	H	1.3	28.4	25.40	1.51	9.54	45.77	74.00	-28.23	PK	
1.46	0	H	1.3	12.7	25.40	1.51	9.54	30.07	54.00	-23.93	AVG	

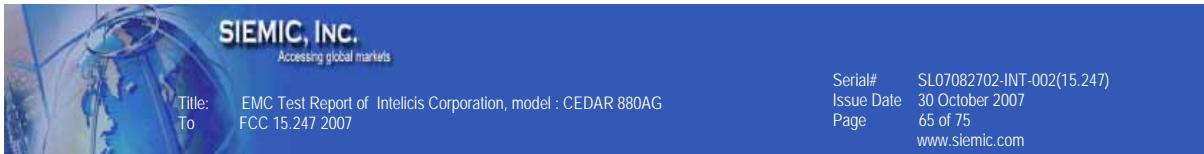

1.46	90	V	1.0	30.4	25.40	1.51	9.54	47.77	74.00	-26.23	PK	
1.46	90	V	1.0	13.7	25.40	1.51	9.54	31.07	54.00	-22.93	AVG	
1.194	90	H	1.3	29	25.40	1.51	9.54	46.37	74.00	-27.63	PK	
1.194	90	H	1.3	13.4	25.40	1.51	9.54	30.77	54.00	-23.23	AVG	
1.194	90	V	1.0	33	25.40	1.51	9.54	50.37	74.00	-23.63	PK	
1.194	90	V	1.0	15.1	25.40	1.51	9.54	32.47	54.00	-21.53	AVG	
11.57	0	H	1.3	27.2	41.20	5.96	9.54	64.82	74.00	-9.18	PK	NOISE FLOOR
11.57	0	H	1.3	13.1	41.20	5.96	9.54	50.72	54.00	-3.28	AVG	NOISE FLOOR
11.57	90	V	1.0	29.9	41.20	5.96	9.54	67.52	74.00	-6.48	PK	NOISE FLOOR
11.57	90	V	1.0	13.4	41.20	5.96	9.54	51.02	54.00	-2.98	AVG	NOISE FLOOR

Emission was scanned up to 40GHz.

802.11a @ 5825Mhz @1 Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Ant.Corr. Factor (dB)	Cable Loss (dB)	Dist.Corr. Factor (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector	Remark
1.46	0	H	1.3	28.61	25.40	1.51	9.54	45.98	74.00	-28.02	PK	
1.46	0	H	1.3	13.11	25.40	1.51	9.54	30.48	54.00	-23.52	AVG	
1.46	90	V	1.0	31.61	25.40	1.51	9.54	48.98	74.00	-25.02	PK	
1.46	90	V	1.0	14.21	25.40	1.51	9.54	31.58	54.00	-22.42	AVG	
1.194	90	H	1.3	29.61	25.40	1.51	9.54	46.98	74.00	-27.02	PK	
1.194	90	H	1.3	13.61	25.40	1.51	9.54	30.98	54.00	-23.02	AVG	
1.194	90	V	1.0	33.21	25.40	1.51	9.54	50.58	74.00	-23.42	PK	
1.194	90	V	1.0	15.21	25.40	1.51	9.54	32.58	54.00	-21.42	AVG	
5.85	90	H	1.3	33.2	34.70	3.80	9.54	62.16	74.00	-11.84	PK	Bandedge
5.85	90	H	1.3	10.5	34.70	3.80	9.54	39.46	54.00	-14.54	AVG	Bandedge
5.85	90	V	1.0	31.2	34.70	3.80	9.54	60.16	74.00	-13.84	PK	Bandedge
5.85	90	V	1.0	10.6	34.70	3.80	9.54	39.56	54.00	-14.44	AVG	Bandedge
11.65	0	H	1.3	26.5	41.20	5.96	9.54	64.12	74.00	-9.88	PK	NOISE FLOOR
11.65	0	H	1.3	13.3	41.20	5.96	9.54	50.92	54.00	-3.08	AVG	NOISE FLOOR
11.65	90	V	1.0	27.7	41.20	5.96	9.54	65.32	74.00	-8.68	PK	NOISE FLOOR
11.65	90	V	1.0	13.2	41.20	5.96	9.54	50.82	54.00	-3.18	AVG	NOISE FLOOR

Emission was scanned up to 40GHz.

Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Manufacturer	Model	CAL Due Date
Spectrum Analyzer	HP	8568B	04/26/2008
Quasi-Peak Adapter	HP	85650A	04/26/2008
RF Pre-Selector	HP	85685A	04/26/2008
Spectrum Analyzer	HP	8564E	05/01/2008
EMI Receiver	Rohde & Schwarz	ESIB 40	02/07/2008
R&S LISN	R&S	ESH2-Z5	04/27/2008
CHASE LISN	Chase	MN2050B	04/26/2008
Antenna(1 ~18GHz)	Emco	3115	08/17/2008
Antenna (30MHz~2GHz)	Sunol Sciences	JB1	10/04/2008
Chamber	Lingren	3m	09/28/2008
Pre-Amplifier(1 ~ 26GHz)	HP	8449	05/01/2008
DMM	Fluke	73III	05/01/2008
Variac	KRM	AEC-2090	See Note
DMM	Fluke	51II	See Note
Horn Antenna (18~40GHz)	Com Power	AH-840	5/21/2008
Microwave Pre-Amp (18~40GHz)	Com Power	PA-840	5/21/2008

Note: No calibration required.

Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 KHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

Sample Calculation Example

At 20 MHz

limit = $250 \mu\text{V} = 47.96 \text{ dB}\mu\text{V}$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver = $40.00 \text{ dB}\mu\text{V}$
(Calibrated for system losses)

Therefore, Q-P margin = $47.96 - 40.00 = 7.96$

i.e. **7.96 dB below limit**

Annex A. iii RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10th Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

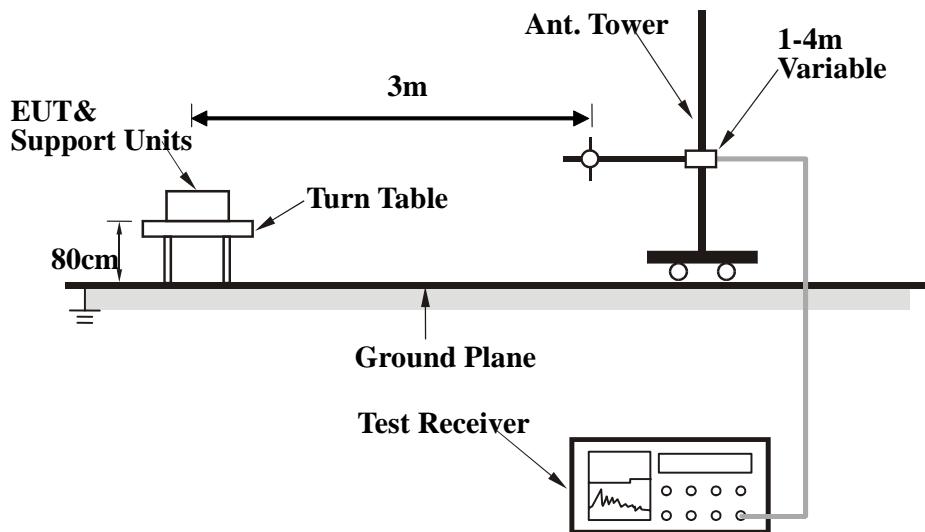

Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor or}$$

$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note :

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.



Title: EMC Test Report of Intelicis Corporation, model : CEDAR 880AG
To FCC 15.247 2007

Serial# SL07082702-INT-002(15.247)
Issue Date 30 October 2007
Page 70 of 75
www.siemic.com

Annex B EUT AND TEST SETUP PHOTOGRAPHS

Please see the attachment.



Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


EUT TEST CONDITIONS

Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION


The following is a description of supporting equipment and details of cables used with the EUT.


Equipment Description (Including Brand Name)	Model & Serial Number	Cable Description (List Length, Type & Purpose)
Laptop PC	Compaq 2100	RJ45 Cable : 20 cm.

Block Configuration Diagram for Radiated Emission

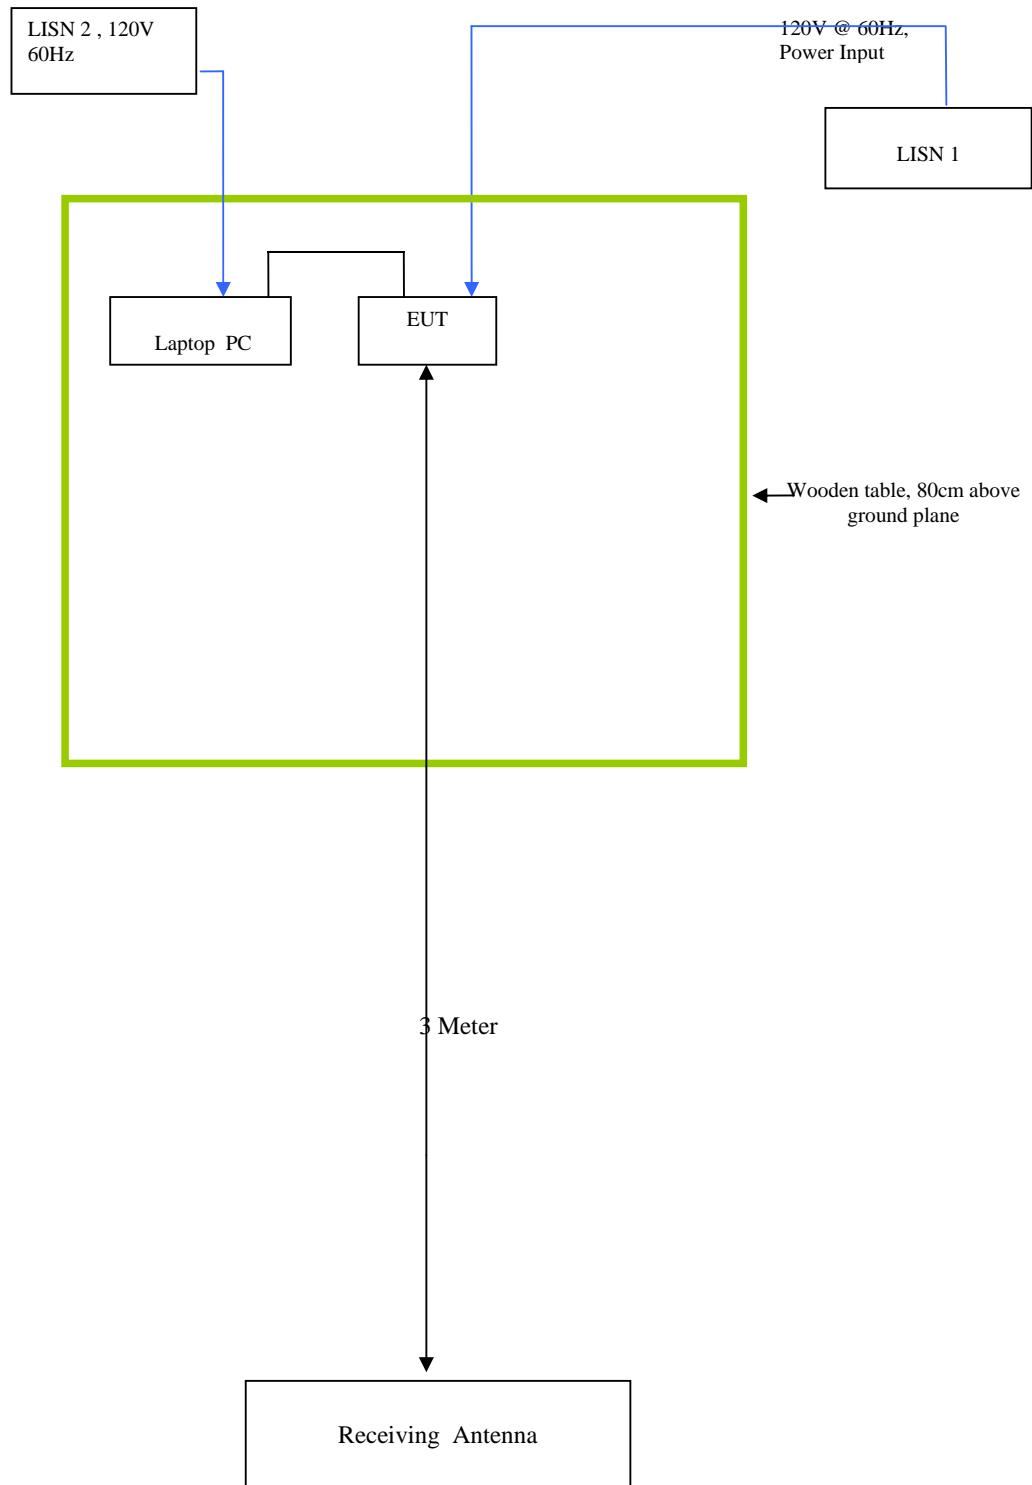

Block Configuration Diagram for Conducted Emission

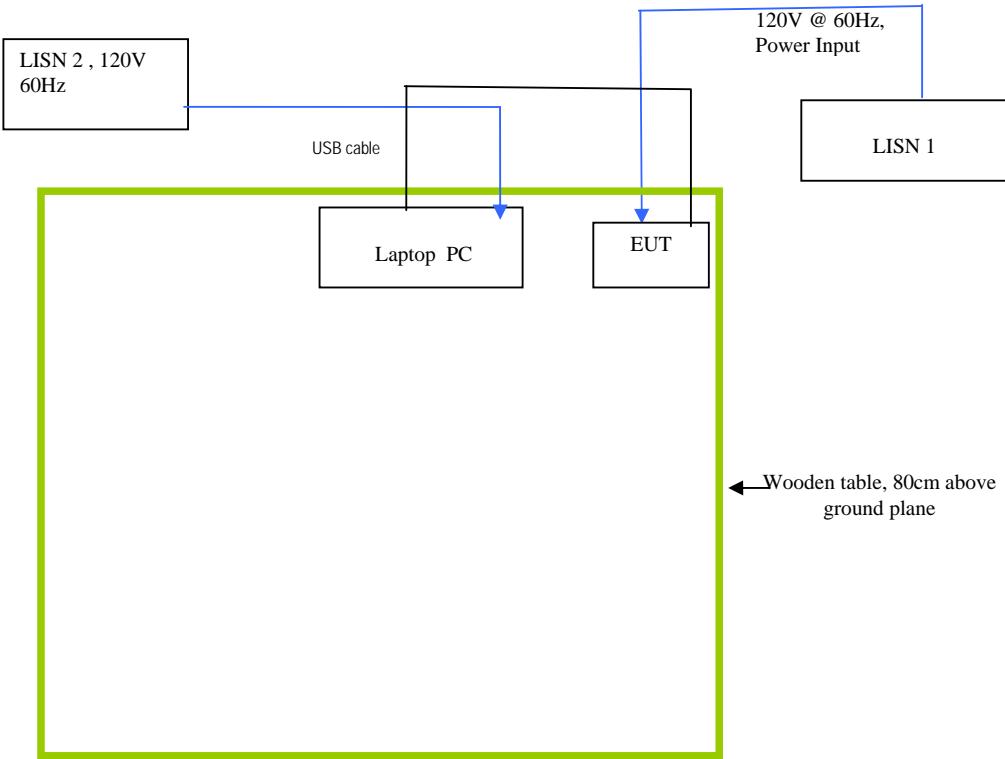

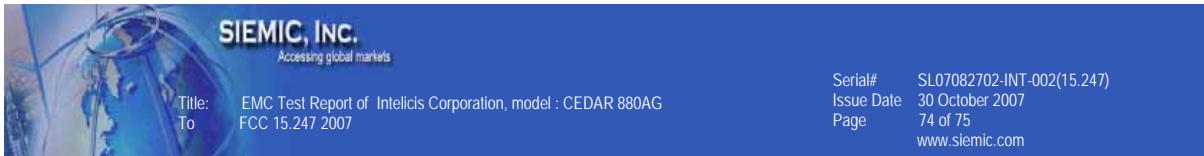

Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions Testing	The EUT was controlled via PC Using ART Program.
Others Testing	Target Power is set at 17 dBm during testing.



Title: EMC Test Report of Intelicis Corporation, model : CEDAR 880AG
To FCC 15.247 2007

Serial# SL07082702-INT-002(15.247)
Issue Date 30 October 2007
Page 75 of 75
www.siemic.com

Annex D USER MANUAL, BLOCK & CIRCUIT DIAGRAM

Please see attachment