

# FCC PART 18 TEST REPORT

For

# **Continental Conair Limited**

35/F, Standard Chartered Tower, Millennium City 1, 388 Kwun Tong Rd, Kwun Tong, Kowloon, Hong Kong.

**FCC ID: U43ICT200** 

Report Type: **Product Name:** Class II Permissive Change **Induction Cooktop** Webb Liu **Test Engineer:** Webb Liu **Report Number:** RSZ140708550-00 **Report Date:** 2014-07-21 Dub Zhang Dick Zhang **Reviewed By:** EMC Leader Bay Area Compliance Laboratories Corp. (Shenzhen) **Test Laboratory:** 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

**Note**: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

# TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	3
RELATED SUBMITTAL(S)/GRANT(S)	3
TEST METHODOLOGY	
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	
EUT Exercise Software	5
SPECIAL ACCESSORIES	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
External Cable	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULT	7
FCC §18.307 - AC LINE CONDUCTED EMISSIONS	8
APPLICABLE STANDARD	
EUT SETUP	8
EMI TEST RECEIVER SETUP	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS	
TEST RESULTS SUMMARY	
TEST DATA	10
FCC §18.305 – FIELD STRENGTH	13
APPLICABLE STANDARD	1.2
EUT SETUP	
EMI TEST RECEIVER SETUP AND SPECTRUM ANALYZER SETUP	
EMI TEST RECEIVER SETUP AND SPECTRUM ANALYZER SETUP	
EMI TEST RECEIVER SETUP AND SPECTRUM ANALYZER SETUP TEST PROCEDURE CORRECTED AMPLITUDE CALCULATION	
EMI TEST RECEIVER SETUP AND SPECTRUM ANALYZER SETUP	

Report No.: RSZ140708550-00

#### **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

The *Continental Conair Limited*'s model: ICT200 (U43ICT200) (the "EUT") in this report is a *Induction Cooktop*, which was measured approximately: 36.0 cm (L) x 29.0 cm (W) x 6.5 cm (H), with input power: AC 120V/60Hz. The highest operating frequency is 65 kHz.

Report No.: RSZ140708550-00

\*All measurement and test data in this report was gathered from production sample serial number: 1407012 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2014-07-08.

## **Objective**

This test report is prepared on behalf of *Continental Conair Limited* in accordance with Part 2-Subpart J and Part 18-Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 18.

This is the CIIPC application of the device. The difference between the original device and the current one is as follows:

Part	Original	New	
	YLS-EE PCB	EG PCB	
MAIN PCB	without sheet-contact process	sheet-contact process	
MAIN FCB	MKP-X2 at C16 site	MKP-X2 at C4 site	
	Chokes at L3 site	Chokes at L2 site	
Contorl PCB	Control win ding is 4 needles	Control win ding is 6 needles	
Thermal Fuse	Without Thermal Fuse	AddedThermal Fuse	

For the changes made to the device, all the test items were performed.

#### Related Submittal(s)/Grant(s)

No related submittal(s).

## **Test Methodology**

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurement was performed at Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 18 Page 3 of 15

#### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Report No.: RSZ140708550-00

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 18 Page 4 of 15

# SYSTEM TEST CONFIGURATION

#### **Justification**

The system was configured for testing in a typical fashion (as normally used by a typical user).

Report No.: RSZ140708550-00

#### **EUT Exercise Software**

No exercise software was used.

## **Special Accessories**

No special accessory was used.

## **Equipment Modifications**

No modification was made to the EUT tested.

## **Support Equipment List and Details**


Manufacturer	er Description Model		Serial Number
N/A	Socket	N/A	140217

## **External Cable**

Cable Description	Length (m)	From Port	То
Un-shielding Un-detachable AC Power Cable	1.2	Mains	Socket

FCC Part 18 Page 5 of 15

# **Block Diagram of Test Setup**

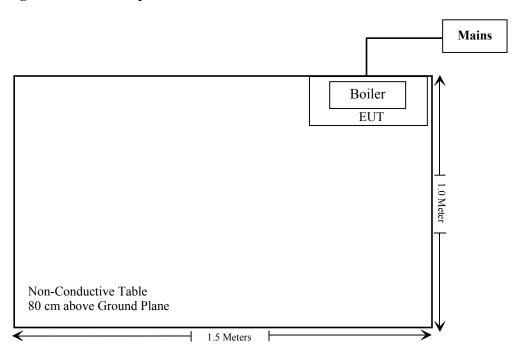

FCC Part 18 Page 6 of 15

# SUMMARY OF TEST RESULT

FCC Rules	Description of Test	Results
§18.307	AC Line Conducted Emissions	Compliance
§18.305	Field Strength	Compliance

Report No.: RSZ140708550-00

FCC Part 18 Page 7 of 15

## FCC §18.307 - AC LINE CONDUCTED EMISSIONS

## Applicable Standard

Conduction limits. For the following equipment, when designed to be connected to the public utility (AC) power line the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal using a  $50~\mu\text{H}/50$  ohms line impedance stabilization network (LISN).


Report No.: RSZ140708550-00

All Induction cooking ranges and ultrasonic equipment

Frequency of emission (MHz)	Conducted limit (dBμV)		
	Quasi-peak	Average	
0.009–0.05	110	-	
0.05-0.15	90–80	-	
0.15–0.5	66 to 56*	56 to 46*	
0.5–5	56	46	
5–30	60	50	

<sup>\*</sup> Decreases with the logarithm of the frequency \*The tighter limits shall apply at the boundary between two frequency ranges

#### **EUT Setup**

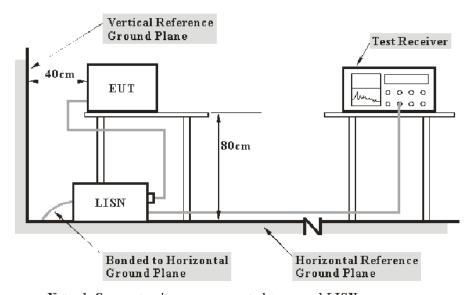

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18 limits.

FCC Part 18 Page 8 of 15

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Report No.: RSZ140708550-00

The EUT was connected to a 120 VAC/60 Hz power source.

#### **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 9 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
9 kHz – 150 kHz	200 Hz
150 kHz – 30 MHz	9 kHz

#### **Test Procedure**

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-Peak detection and Average detection mode.

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2014-06-03	2015-06-03
Rohde & Schwarz	2 <sup>nd</sup> L.I.S.N.	ESH3-Z5	100113	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2014-05-14	2015-05-14
Rohde & Schwarz	1 <sup>st</sup> L.I.S.N.	ENV216	3560.6650.12- 101613-Yb	2014-06-09	2015-06-09
Rohde & Schwarz	CE Test software	EMC 32	V8.53		

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

#### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 18.307(a), the worst margin reading as below:

#### 8.5 dB at 3.618000 MHz in the Neutral conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL.,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

FCC Part 18 Page 9 of 15

## **Test Data**

## **Environmental Conditions**

Temperature:	25°C
Relative Humidity:	50 %
ATM Pressure:	100.0 kPa


Report No.: RSZ140708550-00

Testing was performed by Webb Liu on 2014-07-14.


Test Mode: Max output power and hot water

FCC Part 18 Page 10 of 15

# AC 120V/60 Hz, Line:



Report No.: RSZ140708550-00

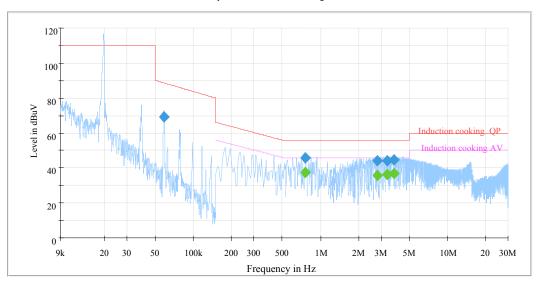


Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.058996	69.4	19.7	88.5	19.1	QP
0.766000	45.8	19.5	56.0	10.2	QP
0.766000	37.3	19.5	46.0	8.7	Ave.
2.814000	43.9	19.6	56.0	12.1	QP
2.814000	35.5	19.6	46.0	10.5	Ave.
3.330000	44.1	19.7	56.0	11.9	QP
3.330000	36.1	19.7	46.0	9.9	Ave.
3.802000	44.6	19.7	56.0	11.4	QP
3.802000	36.7	19.7	46.0	9.3	Ave.

FCC Part 18 Page 11 of 15

## **AC 120V/ 60 Hz, Neutral:**



Report No.: RSZ140708550-00

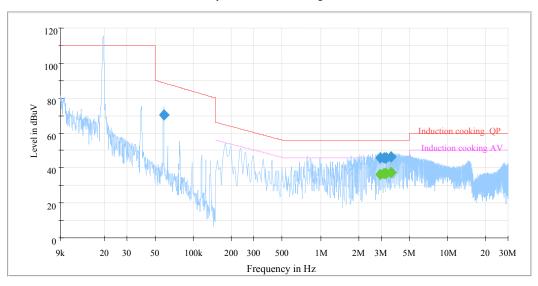

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.058293	70.2	19.7	88.6	18.4	QP
2.966000	45.7	19.7	56.0	10.3	QP
2.966000	36.5	19.7	46.0	9.5	Ave.
3.162000	45.6	19.7	56.0	10.4	QP
3.162000	37.0	19.7	46.0	9.0	Ave.
3.286000	45.8	19.7	56.0	10.2	QP
3.286000	37.0	19.7	46.0	9.0	Ave.
3.618000	46.1	19.7	56.0	9.9	QP
3.618000	37.5	19.7	46.0	8.5	Ave.

## Note:

1) Corrected Amplitude = Reading + Correction Factor
2) Correction Factor =LISN/ISN VDF (Voltage Division Factor) + Cable Loss + Pulse Limiter Attenuation
3) Margin = Limit - Corrected Amplitude


FCC Part 18 Page 12 of 15

## FCC §18.305 – FIELD STRENGTH

## **Applicable Standard**

FCC §18.305(b)

## **EUT Setup**

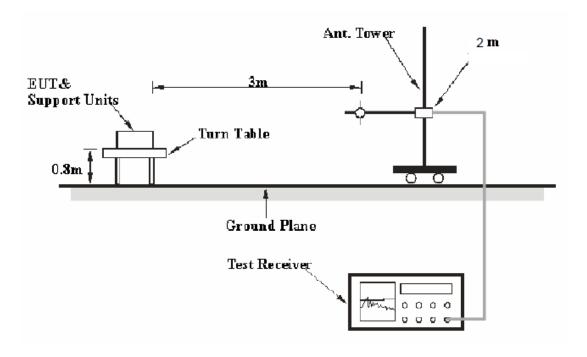

Report No.: RSZ140708550-00

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the FCC MP - 5.

The EUT was connected to 120 VAC/60 Hz power source.

## **EMI Test Receiver Setup and Spectrum Analyzer Setup**

The system was investigated from 9 kHz to 30 MHz.

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	200 Hz	QP
150 kHz – 30 MHz	9 kHz	30 kHz	9 kHz	QP

FCC Part 18 Page 13 of 15

#### **Test Procedure**

During the conducted emission test, the EUT was connected to the AC floor outlet.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak detection mode.

## **Corrected Amplitude Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Report No.: RSZ140708550-00

Corrected Amplitude = Reading + Antenna Factor + Cable Loss

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-LINDGREN	Passive Loop Antenna	6512	00029604	2011-11-30	2014-11-29
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2013-11-12	2014-11-12
TDK	Chamber	Chamber A	2#	2014-05-06	2014-11-04
HP	Amplifier	HP8447E	1937A01046	2014-05-06	2015-05-06
R&S	Auto test Software	EMC32	V6.30	-	-

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25°C		
Relative Humidity:	50 %		
ATM Pressure:	100.0 kPa		

The testing was performed by Webb Liu on 2014-07-15

FCC Part 18 Page 14 of 15

9 kHz-30 MHz

Test Mode: Max output power and hot water

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Detector (PK/QP/Ave.)	Direction (Degree)	Height (m)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
0.021	70.01	QP	98	2	82.8	83.52	13.51
0.156	70.84	QP	156	2	60.7	83.52	12.68
0.365	71.57	QP	179	2	52.8	83.52	11.95
0.980	66.70	QP	259	2	46.1	83.52	16.82
1.230	66.46	QP	319	2	44.2	83.52	17.06
2.150	61.83	QP	84	2	39.7	83.52	21.69

Report No.: RSZ140708550-00

\*\*\*\*END OF REPORT\*\*\*\*

FCC Part 18 Page 15 of 15