



TESTING LABORATORY  
CERTIFICATE # 4821.01



## FCC PART 18 TEST REPORT

For

### Continental Conair Limited

35/F, Standard Chartered Tower, Millennium City 1 388 Kwun Tong Road, Kwun Tong Kowloon,  
Hong Kong

**FCC ID: U43WIH800**

<b>Report Type:</b>	<b>Product Type:</b>
Class II Permissive Change	Commercial Induction Range
<b>Report Number:</b>	<u>SZ2210430-14856E-EM-00</u>
<b>Report Date:</b>	<u>2021-05-19</u>
<b>Reviewed By:</b>	<u>Jason Xiao</u> <u>EMC Engineer</u>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “\*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>.3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	.3
OBJECTIVE .....	.3
TEST METHODOLOGY .....	.3
MEASUREMENT UNCERTAINTY.....	.3
TEST FACILITY .....	.4
<b>OPERATING CONDITION/TEST CONFIGURATION.....</b>	<b>.5</b>
JUSTIFICATION .....	.5
EUT EXERCISE SOFTWARE .....	.5
SPECIAL ACCESSORIES.....	.5
EQUIPMENT MODIFICATIONS .....	.5
SUPPORT EQUIPMENT LIST AND DETAILS .....	.5
EXTERNAL CABLE LIST AND DETAILS .....	.5
BLOCK DIAGRAM OF TEST SETUP .....	.6
<b>SUMMARY OF TEST RESULT .....</b>	<b>.7</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>.8</b>
<b>CONDUCTED EMISSIONS .....</b>	<b>.9</b>
APPLICABLE STANDARD .....	.9
EUT SETUP .....	.9
EMI TEST RECEIVER SETUP.....	.9
TEST PROCEDURE .....	.10
TEST DATA .....	.10
<b>FCC §18.305 – FIELD STRENGTH.....</b>	<b>.13</b>
APPLICABLE STANDARD .....	.13
EUT SETUP .....	.13
EMI TEST RECEIVER SETUP AND SPECTRUM ANALYZER SETUP.....	.13
TEST PROCEDURE .....	.14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	.14
TEST RESULTS SUMMARY.....	.14
TEST DATA AND PLOTS.....	.14

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	Commercial Induction Range
Tested Model	WIH800
Multiple Model	WIH800#####
Model Differences	Refer to the DoS letter
Voltage Range	AC 120V/60Hz
Highest operating frequency	28kHz
Date of Test	2021-05-10 to 2021-05-12
Sample serial number	SZ2210430-14856E-EM-S_4KK (Assigned by BACL, Shenzhen)
Received date	2021-04-30
Sample/EUT Status	Good condition

### Objective

This report is in accordance with Part 2-Subpart J, and Part 18-Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

This is a CIIPC application of the device; the differences between the original device and the current one are as follows:

- (1) Change the chip.
- (2) Adding the model number “WIH800#####”.

Based on above difference listed, the modifications will impact all test data, so in this report, all the test items were performed.

### Test Methodology

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurements were performed at Bay Area Compliance Laboratory Corporation. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

### Measurement Uncertainty

Parameter	uncertainty	
Conducted Emissions	±1.95dB	
Radiated Emissions	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## **OPERATING CONDITION/TEST CONFIGURATION**

### **Justification**

The EUT was operated at maximum (continuous) RF output power. The loads consisted of water in a Boiler in the amounts specified in the test procedure.

### **EUT Exercise Software**

No exercise software was used.

### **Special Accessories**

No special accessory was used.

### **Equipment Modifications**

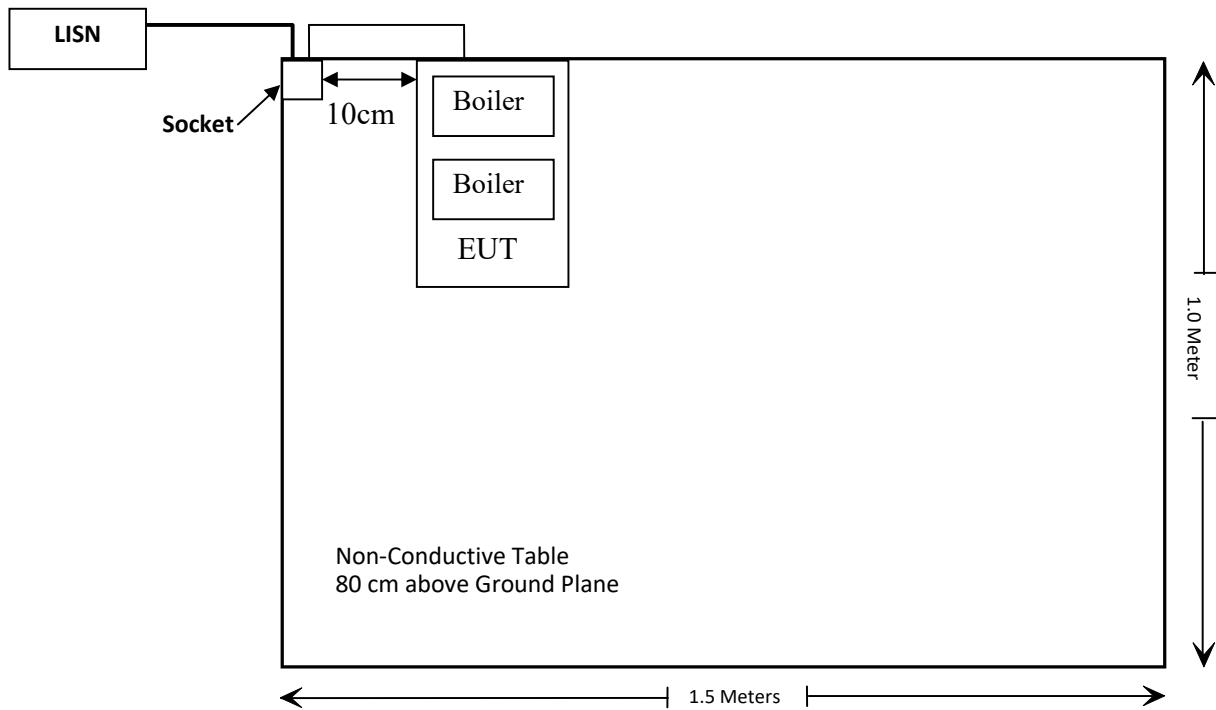
No modifications were made to the EUT tested.

### **Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
OUKE	Boiler	Unknown	Unknown

### **External Cable List and Details**

Cable Description	Length (m)	From/Port	To
Unshielded Un-detachable AC cable	1.0	LISN	Socket
Unshielded Un-detachable AC cable	1.0	Socket	EUT

**Block Diagram of Test Setup**

**SUMMARY OF TEST RESULT**

FCC Rules	Description of Test	Results
§18.307	AC Line Conducted Emissions	Compliance
§18.305	Field Strength	Compliance

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>CONDUCTED EMISSIONS</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2020/11/29	2021/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2020/11/29	2021/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
<b>FIELD STRENGTH</b>					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
ETS	Passive Loop Antenna	6512	29604	2018/07/14	2021/07/13
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 4	EC-007	2020/11/29	2021/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

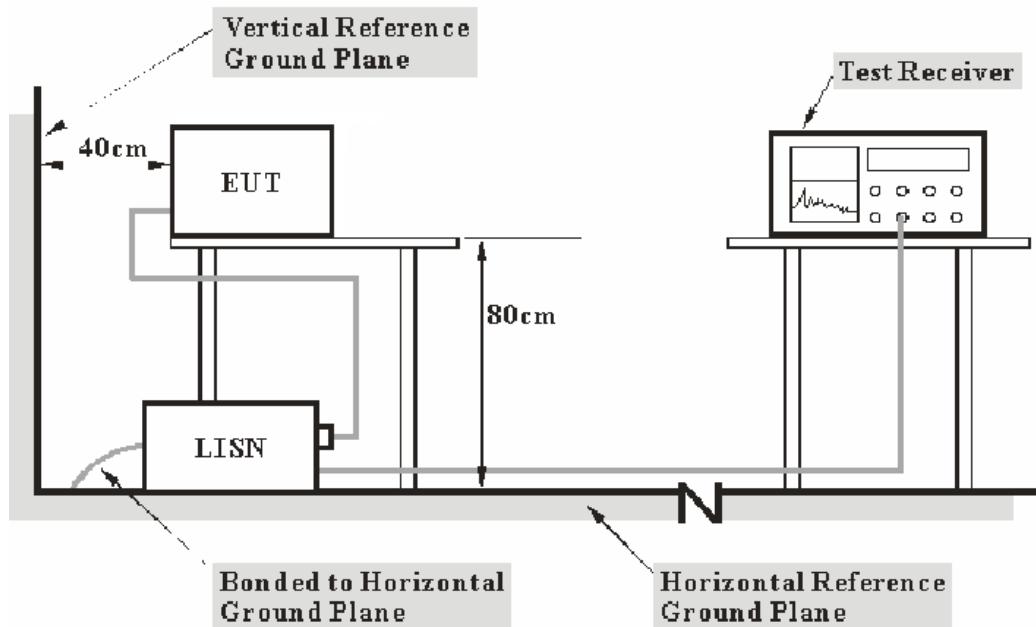
**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## CONDUCTED EMISSIONS

### Applicable Standard

FCC §18.307

### EUT Setup



**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18.

The socket was connected to a 120 VAC/ 60Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

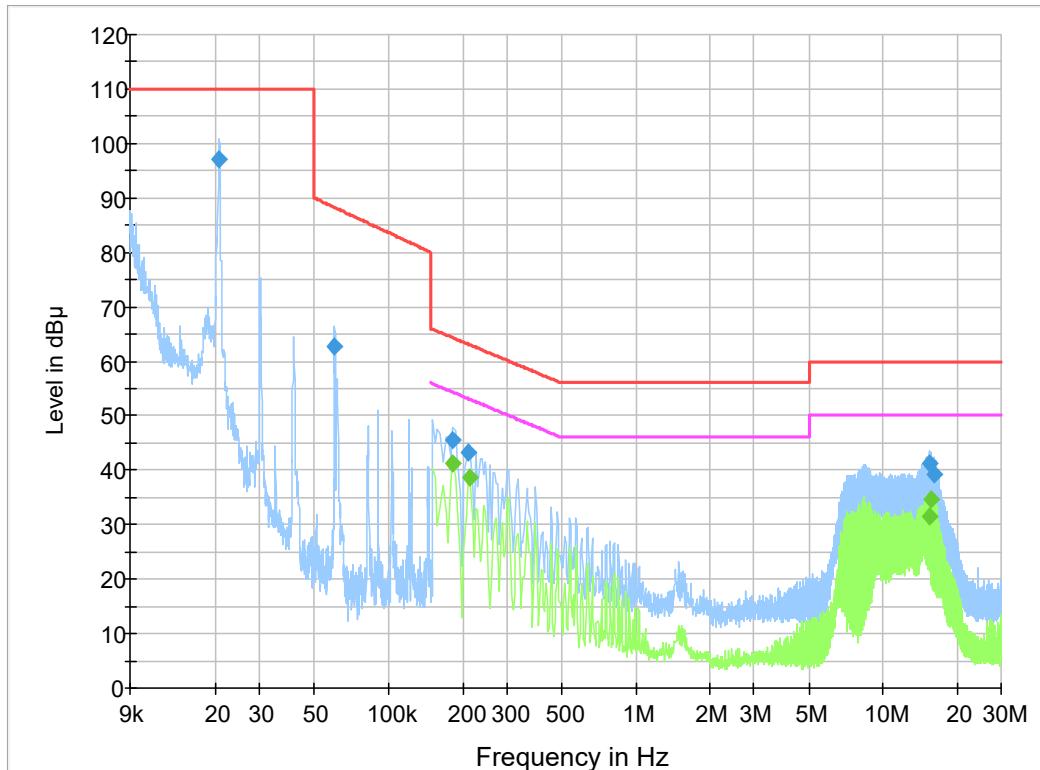
## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	65 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Haiguo Li on 2021-05-12.*

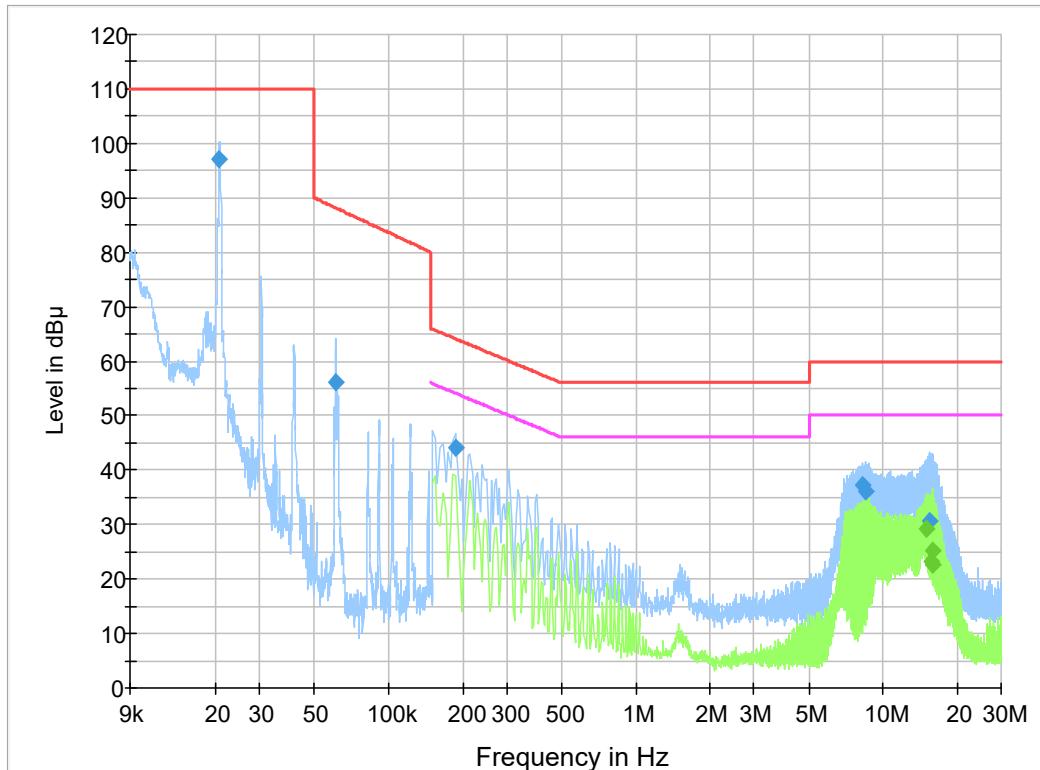
*Test mode: Cooking*

**AC 120V/60 Hz, Line****Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.020664	97.2	9.000	L1	20.6	12.8	110.0
0.060662	62.6	9.000	L1	19.8	25.6	88.2
0.182000	45.4	9.000	L1	19.8	18.9	64.3
0.210000	43.2	9.000	L1	19.8	20.1	63.1
15.302000	41.2	9.000	L1	20.0	18.8	60.0
16.026000	39.2	9.000	L1	20.0	20.8	60.0

**Final Result 2**

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.182000	41.2	9.000	L1	19.8	13.1	54.3
0.214000	38.5	9.000	L1	19.8	14.5	53.0
15.386000	31.6	9.000	L1	20.0	18.4	50.0
15.634000	34.7	9.000	L1	20.0	15.3	50.0

**AC 120V/60 Hz, Neutral****Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.020705	97.1	9.000	N	20.6	12.9	110.0
0.061271	56.1	9.000	N	19.8	32.0	88.1
0.186000	44.1	9.000	N	19.8	20.0	64.1
8.270000	37.2	9.000	N	19.9	22.8	60.0
8.514000	36.2	9.000	N	19.9	23.8	60.0
15.478000	30.7	9.000	N	20.0	29.3	60.0

**Final Result 2**

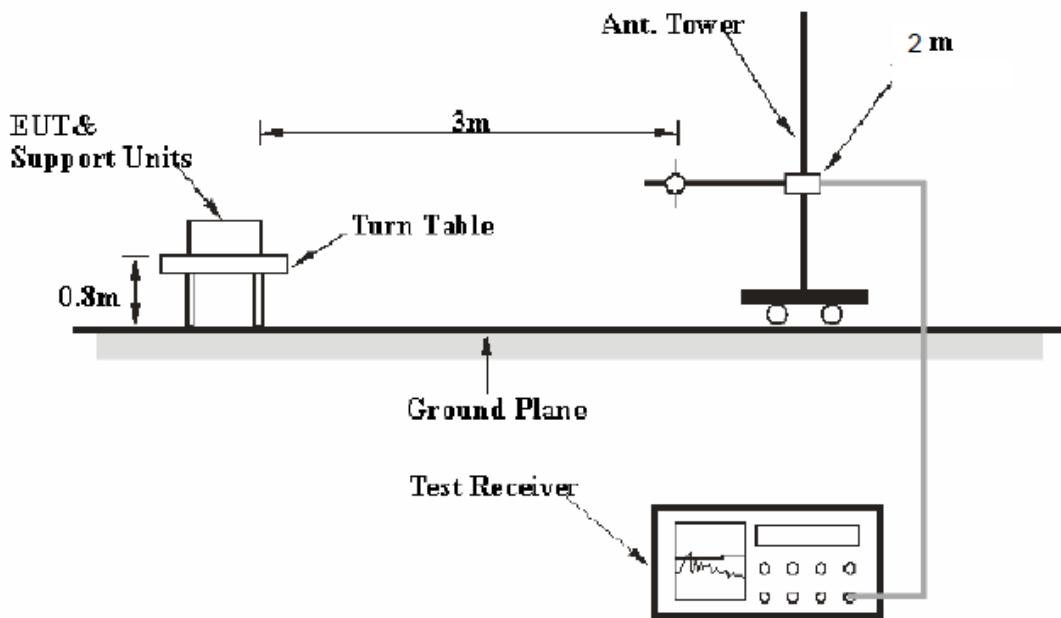
Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
15.050000	29.2	9.000	N	19.9	20.8	50.0
15.538000	23.1	9.000	N	20.0	26.9	50.0
15.874000	25.3	9.000	N	20.0	24.7	50.0
15.934000	22.7	9.000	N	20.0	27.3	50.0

## FCC §18.305 – FIELD STRENGTH

### Applicable Standard

FCC §18.305(b)

### EUT Setup



The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the FCC MP - 5.

The EUT was connected to 120 VAC/60 Hz power source.

### EMI Test Receiver Setup and Spectrum Analyzer Setup

The system was investigated from 9 kHz to 30MHz.

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 30 MHz	9 kHz	30 kHz	9 kHz	QP

## Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was in the normal (naïve) operating mode during the final qualification test to represent the worst results.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 18,

## Test Data and Plots

### Environmental Conditions

Temperature:	24.2°C
Relative Humidity:	60%
ATM Pressure:	100.9 kPa

*The testing was performed by Harris He on 2021-05-10.*

*Test mode: Cooking*

**9 kHz –30 MHz**

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V/m)	Detector (PK/QP)	Antenna height (m)	Turntable position (degree)	Correction Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
0.52	44.36	QP	2	172.0	51.9	103.52	59.16
0.79	46.57	QP	2	235.0	48.0	103.52	56.95
1.76	39.62	QP	2	316.0	46.2	103.52	63.90
1.91	44.43	QP	2	225.0	40.9	103.52	59.09
4.08	48.49	QP	2	163.0	36.4	103.52	55.03
6.23	41.25	QP	2	56.0	34.3	103.52	62.27

**Note:**

- 1) Corrected Amplitude = Meter Reading + Correction Factor
- 2) Correction Factor = Antenna Factor + Cable Loss - Amplifier Gain
- 3) Margin = Limit – Corrected Amplitude
- 4) The data below 20dB to the limit was not recorded.
- 5) The radiation limit (3m distance) = $20*\log1500+40*\log\left(\frac{30}{3}\right)=103.52$

**\*\*\*\*\* END OF REPORT \*\*\*\*\***