

Test Report

Bureau Veritas Consumer Products Services, Inc.

Report No ET1639-3

> ASSA ABLOY Inc. Client

110 Sargent Drive Address

New Haven, CT 06511

Phone 203-821-5724

Items tested IN-DIKP (Model BLE9118K)

FCC ID U4A-MODBLE9118K IC 6982A-MODBLE9118K

> FRN 0016550824

Equipment Type Part 15 Low Power Transmitter Below 1705kHz

Equipment Code DCD **Emission Designator** 2K22A1D

Authorized by

Standards CFR Title 47 FCC Part 15.209, RSS-210 Issue 9 Section 4.4

Test Dates Jul 31 - Sep 3, 2019

Results As detailed within this report

Anna Vancheva Prepared by

Issue Date 9/23/2019

Conditions of Issue This Test Report is issued subject to the conditions stated in the 'Conditions of Testing'

section on page 19 of this report.





Contents

Contents	2
Summary and Test Methodology	3
Product Tested - Configuration Documentation	
Compliance Statement	
Modifications Required for Compliance	5
Test Results	
Radiated Emissions	6
Occupied Bandwidth 99%	12
Measurement Uncertainty	
Conditions Of Testing	10

Form Final Report REV 2-16-07 (DW)



Summary and Test Methodology

Between July 31 and Sep 3 2019 we tested the IN-DIKP (Model BLE9118K) for compliance with the following requirements:

CFR Title 47 FCC Part 15.209, RSS-210 Issue 9 Section 4.4

EUT transmits at 125 kHz. Emissions were measured with the EUT in its intended upright installation orientation. EUT has an internal non-detachable coil loop antenna.

EUT includes a certified Bluetooth Low Energy module (FCC ID: TCZ-10103751G1 and IC: 1175F-10103751G1).

Radiated emission testing was performed according to the procedures specified in ANSI C63.10-2013 and RSS-Gen Issue 5.

AC mains conducted emission testing was performed for both 24VDC and PoE(48VDC) configurations.

Following bandwidths were used during radiated and conducted spurious emissions testing.

Frequency	RBW	VBW
9kHz-150kHz	200Hz	1kHz
150kHz-30MHz	9kHz	30kHz
30MHz-1GHz	120kHz	1MHz

We found that the product met the above requirements with modification. See "Modifications Required for Compliance" section of this report. The test sample was received in good condition.



Product Tested - Configuration Documentation

					EUT (Configuration						
Work	Order:	S1639										
Con	npany:	Assa A	bloy									
Company Ac	ddress:	110 Sar	Sargent Drive									
		New H	aven, CT 06	511								
C	ontact:	Dave D	eBiase									
			Product Marketing Name Model Number SN									
	EUT:	IN-DIK				BI	LE9118K			1,2		
EUT Descr			c Controller									
EUT Tx Freq	uency:	125kHz	(LF RFID)	, 13.56MHz (HF	RFID)							
Port Label	Port	Type	# ports	# populated	cable type	shielded	ferrites	length (m)	in/out	under	comment	
I OI L LUDGI	1010	Турс	" por us	" populateu	cubic type	Sinciaca	Territes	length (m)	III/Out	test	comment	
Ethernet Door	Ether	• •	1	1	Ethernet	No	Yes	1.5	in		Comment	
		net	1 1	1 1				0		test	comment	
Ethernet Door	Ether	net r DC	1 1 1	1 1 1 1	Ethernet	No	Yes	1.5	in	test yes	Comment	
Ethernet Door Power DC	Ether Powe	net r DC net	1 1 1 1	1 1 1 1 1 1 1	Ethernet Power DC	No No	Yes No	1.5	in in	yes yes	Comment	
Ethernet Door Power DC Ethernet frame	Ether Powe Ether	net r DC net	1 1 1 1	1 1 1 1 1 1	Ethernet Power DC Ethernet	No No Yes	Yes No No	1.5 5 4.5	in in in	yes yes yes	Comment	
Ethernet Door Power DC Ethernet frame	Ether Powe Ether	net r DC net	1 1 1 1	1 1 1 1 1	Ethernet Power DC Ethernet	No No Yes	Yes No No	1.5 5 4.5	in in in	yes yes yes	Comment	
Ethernet Door Power DC Ethernet frame	Ether Powe Ether	net r DC net	1 1 1 1	1 1 1 1	Ethernet Power DC Ethernet	No No Yes	Yes No No	1.5 5 4.5	in in in	yes yes yes		
Ethernet Door Power DC Ethernet frame Power AC	Ether Powe Ether Powe	net r DC net r AC	1 1 1 1 1 1	1 1 1 1	Ethernet Power DC Ethernet	No No Yes	Yes No No	1.5 5 4.5	in in in	yes yes yes	Comment	
Ethernet Door Power DC Ethernet frame Power AC Software Operating	Ether Powe Ether Powe Mode Do	net r DC net r AC	1 1 1 1	1 1 1 1	Ethernet Power DC Ethernet	No No Yes	Yes No No	1.5 5 4.5	in in in	yes yes yes	Comment	
Ethernet Door Power DC Ethernet frame Power AC	Ether Powe Ether Powe Mode Do	net r DC net r AC	1 1 1 1	1 1 1 1	Ethernet Power DC Ethernet	No No Yes	Yes No No	1.5 5 4.5	in in in	yes yes yes	Comment	



Compliance Statement

RSS-GEN	RSP-100	RSS 210	Part 15	Comments
6.4			15.15(b)	There are no controls accessible to the user that
				varies the output power.
	3.1		15.19	The label is shown in the label exhibit.
	3.2		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	See "Modifications Required for Compliance" section below.
3.2			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13.2			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
6.13.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
6.8			15.203	The antenna for this device is an internal non- detachable coil loop antenna.
8.10			15.205 15.209	The fundamental is not in a Restricted band and the
			15.209	spurious and harmonic emissions in the Restricted
				bands comply with the general emission limits of
				15.209 or RSS-Gen as applicable
8.8			15.207	AC mains emissions met the requirements of 15.207
6.7				99% emissions bandwidth plot is provided.

Modifications Required for Compliance

PoE configuration for radiated emissions was tested with ferrite Laird 28B0473-200 on all four Ethernet pairs.



Test Results

Radiated Emissions

9-150 kHz

Bureau Veritas Consumer Product Services Inc.

Radiated Emissions, Electric Field, 3m Measurement

Top Peaks Perpendicular 9-150kHz

Notes:

BLE off.

Work Order - T1639

EUT Power Input - Battery

Test Site - CH1

Conditions - 24.6°C; 46.8%RH; 1003mBar

Test Engineer - AV

Data Taken at 06:08:37 PM, Tuesday, August 06, 2019

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBµV/m)	Lim: FCC_pt15_2 09_dBµV/m (dBµV/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
0.026033	43.3	13.8	57.1	119.3	-62.2	PASS		165
0.080977	36.7	10.6	47.3	109.4	-62.1	PASS		195
0.094809	36.1	10.4	46.5	108.1	-61.6	PASS		330
0.109533	36.8	10.2	47	106.8	-59.8	PASS	·	270
0.124994	61.1	10.2	71.3	105.7	-34.4	PASS	-34.4	150
0.140035	32.3	10.2	42.4	104.7	-62.3	PASS		285

Bureau Veritas Consumer Product Services Inc.

Radiated Emissions, Electric Field, 3m Measurement

Top Peaks Parallel 9-150kHz

Notes:

BLE off.

Work Order - T1639 EUT Power Input - Battery

Test Site - CH1

Conditions - 24.6°C; 46.8%RH; 1003mBar

Test Engineer - AV

Data Taken at 06:08:37 PM, Tuesday, August 06, 2019

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBµV/m)	Lim: FCC_pt15_2 09_dBμV/m (dBμV/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
0.03444	42.3	12.9	55	116.9	-61.8	PASS		150
0.058149	38.6	11	49.6	112.3	-62.7	PASS		225
0.078319	37.6	10.6	48.2	109.7	-61.6	PASS		195
0.101443	35.7	10.2	45.8	107.5	-61.7	PASS		120
0.124934	58.6	10.2	68.7	105.7	-37	PASS	-37	285
0.142992	32.7	10.2	42.7	104.5	-61.8	PASS		15





150-1000kHz

Bureau Veritas Consumer Product Services Inc.

Radiated Emissions Magnetic Field 3m Distance

Top Peaks Parallel 150-1000kHz

Notes:

BLE off.

Work Order - T1639

EUT Power Input - Battery

Test Site - CH1

Conditions - 24.6°C; 46.8%RH; 1003mBar

Test Engineer - AV

Data Taken at 06:26:51 PM, Tuesday, August 06, 2019

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/s)	Adjusted Peak Amplitude (dBµA/m)	Lim: FCC_pt15_2 09_dBµV/m (dBµA/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
0.519	38.8	10.3	49	73.3	-24.3	PASS		75
0.575	37.6	10.3	47.9	72.4	-24.6	PASS		180
0.666	37.3	10.4	47.7	71.2	-23.5	PASS	-23.5	315
0.777	34.6	10.6	45.2	69.8	-24.6	PASS		135
0.85	33.7	10.6	44.4	69	-24.7	PASS		300
0.937	32.2	10.7	42.9	68.2	-25.3	PASS		345

Bureau Veritas Consumer Product Services Inc.

Radiated Emissions Magnetic Field 3m Distance

Top Peaks Perpendicular 150-1000kHz

Notes: BLE off. Work Order - T1639 EUT Power Input - Battery

Test Site - CH1

Conditions - 24.6°C; 46.8%RH; 1003mBar

Test Engineer - AV

Data Taken at 06:26:51 PM, Tuesday, August 06, 2019

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/s)	Adjusted Peak Amplitude (dBµA/m)	Lim: FCC_pt15_2 09_dBµV/m (dBµA/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
0.568	38.6	10.3	48.9	72.6	-23.6	PASS	-23.6	210
0.634	37.3	10.4	47.7	71.6	-23.9	PASS		0
0.739	35.2	10.5	45.8	70.3	-24.5	PASS		285
0.792	34.4	10.6	45	69.6	-24.6	PASS		30
0.851	33.4	10.6	44	69	-25	PASS		195
0.922	33	10.7	43.7	68.3	-24.6	PASS		345



1-30 MHz

Bureau Veritas Consumer Product Services Inc.

Radiated Emissions Magnetic Field 3m Distance

Top Peaks Parallel 1-30MHz

Notes:

BLE off.

Work Order - T1639

EUT Power Input - Battery

Test Site - CH1

Conditions - 24.6°C; 46.8%RH; 1003mBar

Test Engineer - AV

Data Taken at 10:07:49 AM, Friday, August 09, 2019

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/s)	Adjusted Peak Amplitude (dBµA/m)	Lim: FCC_pt15_2 09_dBμV/m (dBμA/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
1.081	29.5	10.7	40.2	66.9	-26.8	PASS		285
1.803	26.2	10.6	36.8	69.5	-32.8	PASS		255
2.614	22.4	10.6	33	69.5	-36.6	PASS		345
3.309	20.2	10.7	30.8	69.5	-38.7	PASS		240
13.56	51.6	11.2	62.8	69.5	-6.7	PASS	-6.7	135
30	11.5	8.3	19.7	40	-20.3	PASS		45

Bureau Veritas Consumer Product Services Inc.

Radiated Emissions Magnetic Field 3m Distance

Top Peaks Perpendicular 1-30MHz

Notes:

BLE off.

Work Order - T1639

EUT Power Input - Battery

Test Site - CH1

Conditions - 24.6°C; 46.8%RH; 1003mBar

Test Engineer - AV

Data Taken at 04:24:08 PM, Tuesday, August 06, 2019

Frequency (MHz)	Raw Peak Reading (dBµV)	Correction Factor (dB/s)	Adjusted Peak Amplitude (dBµA/m)	Lim: FCC_pt15_2 09_dBµV/m (dBµA/m)		Peak Test Results (Pass/Fail)	Worst Margin (dB)	EUT Azimuth (degrees)
1.064	30.3	10.7	41	67.1	-26.1	PASS		345
1.589	25.3	10.6	35.9	63.6	-27.7	PASS		135
2.536	22.9	10.6	33.5	69.5	-36.1	PASS		165
13.559	52.3	11.2	63.5	69.5	-6.1	PASS	-6.1	300
28.674	23	8.7	31.7	69.5	-37.8	PASS		0
30	11.5	8.3	19.8	40	-20.2	PASS		0

In 9kHz-30MHz range, no emissions were found in receive loop antenna's "ground-parallel" orientation.





30-1000 MHz

Bureau Veritas Consumer Product Services Inc.

Radiated Emissions Electric Field 3m Distance

Top Peaks Vertical 30-1000MHz

Notes:

BLE off.

Work Order - T1639

EUT Power Input - Battery

Test Site - CH1

Conditions - 24.6°C; 46.8%RH; 1003mBar

Test Engineer - AV

Data Taken at 06:04:10 PM, Saturday, August 03, 2019

Frequency (MHz)	Peak Reading (dBµV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBµV/m)	Lim1: FCC_pt15_2 09 (dBµV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.097	31.6	-6.7	24.9	40	-15.1	PASS	-15.1	200	270
152.802	38.4	-15.1	23.3	43.5	-20.2	PASS		100	180
155.93	39.4	-15	24.3	43.5	-19.2	PASS		100	180
157.87	37.7	-15.1	22.6	43.5	-20.9	PASS		100	180
159.059	38.4	-15.1	23.3	43.5	-20.2	PASS		100	180
937.726	31.6	-1.2	30.4	46	-15.6	PASS		100	45

Bureau Veritas Consumer Product Services Inc.

Radiated Emissions Electric Field 3m Distance

Top Peaks Horizontal 30-1000MHz

Notes:

BLE off

Work Order - T1639

EUT Power Input - Battery

Test Site - CH1

Conditions - 24.6°C; 46.8%RH; 1003mBar

Test Engineer - AV

Data Taken at 06:04:10 PM, Saturday, August 03, 2019

Frequency (MHz)	Peak Reading (dBµV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBµV/m)	Lim1: FCC_pt15_2 09 (dBμV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
30.145	32.8	-6.7	26.1	40	-13.9	PASS		100	90
124.793	33	-13.1	19.9	43.5	-23.6	PASS		200	90
197.713	33.5	-14.6	18.9	43.5	-24.6	PASS		250	315
701.337	50.9	-5.1	45.8	46	-0.2	PASS	-0.2	250	45
702.646	40.1	-5.1	35	46	-11	PASS		100	315
946.141	31.8	-1	30.8	46	-15.2	PASS		100	0



Test Equipment Used

Rev. 7/24/2019

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
2093 MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	1	11/21/2019
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due
EMI Chamber 1	719150	2762A-6	A-0015	30-1000MHz	1685	1	12/7/2020
Preamps /Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
2311 PA	1-1000MHz	PAM-103	OM-POWE	441174	2311	II	10/29/2019
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Red-Black Bilog	30-2000MHz	JB1	Sunol	A091604-2	1106	1	4/26/2021
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due
Weather Clock (Pressure Only)		BA928	gon Scient	C3166-1	831	1	5/15/2020
Asset #2658		1235C97	ntrol Compa	181683808	2658	1	4/3/2020
Cables	Range		Mfr			Cat	Calibration Due
Asset #2456	9KHz-18GHz		MegaPhase)		II	10/31/2019
Asset #2464	9KHz-18GHz		MegaPhase)		II	10/31/2019
Asset #2585	9KHz-18GHz		Pasternack			П	5/24/2020

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

30-1000MHz PoE (48VDC)

Bureau Veritas Consumer Product Services Inc.

Radiated Emissions Electric Field 3m Distance

Top Peaks Horizontal 30-1000MHz

Notes:

Work Order - T1639

EUT Power Input - POE (48Vdc)

Test Site - CH-1

Conditions - 23.7°C; 56%RH; 1008mBar

BLE9118K, with ferrite: Laird 28B0473-200 on all four Ethernet pairs;

with metal escutcheon Test Engineer - AKZ

Data Taken at 03:15:32 PM, Wednesday, July 31, 2019

Frequency (MHz)	Peak Reading (dBµV)	Correction Factor (dB/m)		Lim1: FCC_pt15_1 09_Class_B (dBµV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: Cispr_Class _B (dBµV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
294.495	50.9	-13.5	37.4	46	-8.7	PASS		47.5	-10.1	PASS		100	225
297.526	51.6	-13.5	38.2	46	-7.9	PASS		47.5	-9.3	PASS		100	225
300.509	51	-13.4	37.7	46	-8.3	PASS		47.5	-9.8	PASS		100	225
375.029	50.1	-11.1	38.9	46	-7.1	PASS		47.5	-8.6	PASS		100	90
500.014	46.7	-8.3	38.4	46	-7.6	PASS		47.5	-9.1	PASS		150	45
625.022	46.4	-6.3	40	46	-6	PASS	-6	47.5	-7.5	PASS	-7.5	100	225



Work Order - T1639

Bureau Veritas Consumer Product Services Inc.

Radiated Emissions Electric Field 3m Distance EUT Power Input - POE (48Vdc)

Top Peaks Vertical 30-1000MHz Test Site - CH-1

Notes: Conditions - 23.7°C; 56%RH; 1008mBar

BLE9118K, with ferrite: Laird 28B0473-200 on all four Ethernet pairs;

with metal escutcheon Test Engineer - AKZ

Data Taken at 03:15:32 PM, Wednesday, July 31, 2019

Frequency (MHz)	Peak Reading (dBµV)	Correction Factor (dB/m)		Lim1: FCC_pt15_1 09_Class_B (dBµV/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Lim2: Cispr_Class _B (dBµV/m)	Lim2 Margin (dB)	Lim2 Test Results (Pass/Fail)	Worst Margin Lim2 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
36.111	45.4	-11.1	34.3	40	-5.7	PASS	(GD)	40.5	-6.2	PASS	(ub)	100	225
37.154	43	-11.8	31.2	40	-8.8	PASS		40.5	-9.3	PASS		100	90
625.022	45.7	-6.3	39.4	46	-6.6	PASS		47.5	-8.1	PASS		150	270
750.055	41.2	-4.2	37	46	-9	PASS		47.5	-10.5	PASS		100	225
822.611	44.1	-2.9	41.2	46	-4.8	PASS		47.5	-6.3	PASS		200	180

Data Taken at 04:28:17 PM, Wednesday, July 31, 2019

Frequency	Raw QP Reading	Correction Factor	Adjusted QP Amplitude	Lim1: FCC_pt15_1 09_Class_B	•	Test Results Lim1	Worst Margin Lim1	Lim2: Cispr_Class _B	Margin to	Test Results Lim2	Worst Margin Lim2	Antenna Height	EUT Azimuth
(MHz)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
174.687	46.6	-16.3	30.3	43.5	-13.2	PASS		40.5	-10.2	PASS	-10.2	152	29
390.032	45.4	-11.1	34.3	46	-11.7	PASS	-11.7	47.5	-13.2	PASS		144	260

Test Equipment Used

Rev. 7/30/2019


(cv. 1700/2013							
Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
2093 MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	11/21/2019
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due
EMI Chamber 1	719150	2762A-6	A-0015	30-1000MHz	1685	- 1	12/7/2020
EMI Chamber 1	719150	2762A-6	A-0015	1-18GHz	1685	I	12/7/2020
Preamps /Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
2311 PA	1-1000MHz	PAM-103	COM-POWER	441174	2311	II	10/29/2019
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Red-Black Bilog	30-2000MHz	JB1	Sunol	A091604-2	1106	I	4/26/2021
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	1	5/15/2020
Asset #2658		1235C97	Control Company	181683808	2658	I	4/3/2020
Cables	Range		Mfr			Cat	Calibration Due
Asset #2456	9KHz-18GHz		MegaPhase			Ш	10/31/2019
Asset #2464	9KHz-18GHz		MegaPhase			II	10/31/2019
Asset #2585	9KHz-18GHz		Pasternack			Ш	5/24/2020

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.





Occupied Bandwidth 99%

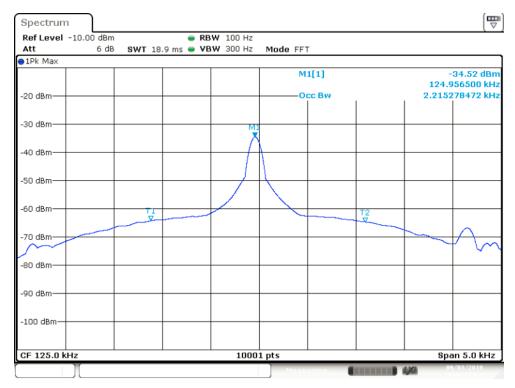

Date: 3.SEP.2019 10:40:36

99% OBW = 2.22kHz

Test Equipment Used

Rev. 7/30/2019								
Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Rental MXE EMI Receiver(1170725)	20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	- 1	5/30/2020	5/30/2019
FSV40 Signal Analyzer	10Hz-40GHz	FSV40	ROHDE & SCHWARZ	101551	2200	- 1	10/1/2019	10/1/2018
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Temp/Humidity Chamber #18		EPX-2H	Espec	137664	1645	I	1/2/2020	1/2/2019
Cables	Range		Mfr			Cat	Calibration Due	Calibrated on
Asset #2595	9KHz-40GHz		Carlisle		2595	II	3/13/2020	3/13/2019
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2615 Active Loop Antenna	9KHz-30MHz	6502	EMCO	2049	2615	- 1	10/30/2019	10/30/2018

 $All \ equipment \ is \ calibrated \ using \ standards \ traceable \ to \ NIST \ or \ other \ nationally \ recognized \ calibration \ standard.$





Conducted Emissions

Bureau Veritas Consumer Product Services Inc.

Conducted Emissions per CISPR 16-2-1

Peak Detector Data

Notes:

EUTBLE9118K: Line

EUT Mode of Operation: PoE

Work Order # - T1639 EUT Power Input - PoE

Test Site - CEMI-2

Conditions: - 22.5°C; 48.8%RH; 1009mBar

Test Engineer - AV

Data Taken at 03:59:54 PM, Monday, August 05, 2019

Frequency (MHz)	Raw Pk Reading (dBµV)	Correction Factor (dB)	Adjusted Pk Amplitude (dBµV)	QP Lim: Mains_FCC&CISP R_QP_Class_B (dBμV)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)
0.151	39.7	20.1	59.9	65.9	-6.1	PASS	
0.179	36.4	20.3	56.7	64.5	-7.8	PASS	
0.242	34.8	20.2	55.1	62	-7	PASS	
0.628	27.1	20.2	47.3	56	-8.7	PASS	
0.734	27.7	19.9	47.7	56	-8.3	PASS	
10.568	39	20.5	59.5	60	-0.5	PASS	-0.5

Bureau Veritas Consumer Product Services Inc.

Conducted Emissions per CISPR 16-2-1, CISPR Average Detector

Final Average Detector Data

Notes:

EUTBLE9118K: Line

EUT Mode of Operation: PoE

Work Order # - T1639 EUT Power Input - PoE Test Site - CEMI-2

Conditions: - 22.5°C; 48.8%RH; 1009mBar

Test Engineer - AV

Data Taken at 03:59:54 PM, Monday, August 05, 2019

Frequency (MHz)	Raw Avg Reading (dBµV)	Correction Factor (dB)	Adjusted Avg Amplitude (dВµV)	Av Lim: Mains_FCC&CISP R_Avg_Class_B (dΒμV)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)
0.157	15.2	20.2	35.4	55.6	-20.2	PASS	
0.165	15.2	20.1	35.3	55.2	-19.9	PASS	
0.236	18.6	20.2	38.8	52.2	-13.4	PASS	
0.628	25.2	20.2	45.4	46	-0.6	PASS	-0.6
0.732	24.6	19.9	44.6	46	-1.4	PASS	
13.56	21.8	20.5	42.3	50	-7.7	PASS	



Test Report for ASSA ABLOY Inc • Report No. ET1639-3

September 23, 2019

Bureau Veritas Consumer Product Services Inc.

Conducted Emissions per CISPR 16-2-1

Peak Detector Data

Notes:

EUT:BLE9118K Neutral EUT Mode of Operation: PoE Work Order # - T1639 EUT Power Input - PoE Test Site - CEMI-2

Conditions: - 22.5°C; 48.8%RH; 1009mBar

Test Engineer - AV

Data Taken at 04:10:05 PM, Monday, August 05, 2019

Frequency	Raw Pk Reading	Correction Factor	Adjusted Pk Amplitude	QP Lim: Mains_FCC&CISP R_QP_Class_B	Margin to the QP Limit	Pk to QP Limit Results	Worst Margin (QP Limit)
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	(Pass/Fail)	(dB)
0.158	33.2	20.2	53.4	65.6	-12.2	PASS	
0.269	28.8	20.2	49	61.2	-12.2	PASS	
0.419	24.1	20.1	44.3	57.5	-13.2	PASS	
0.628	26.5	20.2	46.7	56	-9.3	PASS	-9.3
0.733	25.9	19.9	45.9	56	-10.1	PASS	
13.559	28.5	20.5	49	60	-11	PASS	

Bureau Veritas Consumer Product Services Inc.

Conducted Emissions per CISPR 16-2-1, CISPR Average Detector

Final Average Detector Data

Notes:

EUT:BLE9118K Neutral EUT Mode of Operation: PoE

Work Order # - T1639 EUT Power Input - PoE Test Site - CEMI-2

Conditions: - 22.5°C; 48.8%RH; 1009mBar

Test Engineer - AV

Data Taken at 04:10:05 PM, Monday, August 05, 2019

Frequency (MHz)	Raw Avg Reading (dBµV)	Correction Factor (dB)	Adjusted Avg Amplitude (dВµV)	Av Lim: Mains_FCC&CISP R_Avg_Class_B (dΒμV)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)
0.628	24.1	20.2	44.2	46	-1.8	PASS	-1.8



Bureau Veritas Consumer Product Services Inc.

Conducted Emissions per CISPR 16-2-1

Peak Detector Data

Notes:

EUT Line tested: Line Phase BLE9118K EUT Mode of Operation: 24 VDC

Work Order # - T1639 EUT Power Input - 24VDC

Test Site - CEMI-2

Conditions: - 22.5°C; 48.8%RH; 1009mBar

Test Engineer - AV

Data Taken at 01:40:39 PM, Monday, August 05, 2019

Frequency (MHz)	Raw Pk Reading (dBμV)	Correction Factor (dB)	Adjusted Pk Amplitude (dBµV)	QP Lim: Mains_FCC&CISP R_QP_Class_B (dBμV)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)
0.169	39	20.1	59.1	65	-5.9	PASS	
0.196	36.2	20.2	56.4	63.8	-7.4	PASS	
0.249	33.8	20.3	54.1	61.8	-7.7	PASS	
0.293	30.8	20.2	51	60.5	-9.4	PASS	
0.351	29.4	20.2	49.6	58.9	-9.4	PASS	
13.559	34.7	20.5	55.2	60	-4.8	PASS	-4.8

Bureau Veritas Consumer Product Services Inc.

Conducted Emissions per CISPR 16-2-1, CISPR Average Detector

Final Average Detector Data

Notes:

EUT Line tested: Line Phase BLE9118K EUT Mode of Operation: 24 VDC Work Order # - T1639 EUT Power Input -24VDC Test Site - CEMI-2

Conditions: - 22.5°C; 48.8%RH; 1009mBar

Test Engineer - AV

Data Taken at 01:40:39 PM, Monday, August 05, 2019

Reading (dBμV)	Correction Factor (dB)	Adjusted Avg Amplitude (dBµV)	Mains_FCC&CISP R_Avg_Class_B (dBμV)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)
15.2	20.1	35.3	55.8	-20.6	PASS	
15.1	20.2	35.3	55.5	-20.2	PASS	
15.1	20.1	35.3	55	-19.8	PASS	
13.4	20.2	33.6	52.7	-19	PASS	
13.6	20.2	33.8	51.3	-17.6	PASS	
20.8	20.5	41.3	50	-8.7	PASS	-8.7
	(dBμV) 15.2 15.1 15.1 13.4 13.6	Reading (dBμV) Factor (dB) 15.2 20.1 15.1 20.2 15.1 20.1 13.4 20.2 13.6 20.2	Reading Factor Amplitude (dBμV) (dB) (dBμV) 15.2 20.1 35.3 15.1 20.2 35.3 15.1 20.1 35.3 13.4 20.2 33.6 13.6 20.2 33.8	Reading (dBμV) Factor (dB) Amplitude (dBμV) R_Avg_Class_B (dBμV) 15.2 20.1 35.3 55.8 15.1 20.2 35.3 55.5 15.1 20.1 35.3 55 13.4 20.2 33.6 52.7 13.6 20.2 33.8 51.3	Reading (dBμV) Factor (dBμV) Amplitude (dBμV) R_Avg_Class_B (dBμV) Avg Margin (dBμV) 15.2 20.1 35.3 55.8 -20.6 15.1 20.2 35.3 55.5 -20.2 15.1 20.1 35.3 55 -19.8 13.4 20.2 33.6 52.7 -19 13.6 20.2 33.8 51.3 -17.6	Reading (dBμV) Factor (dBμV) Amplitude (dBμV) R_Avg_Class_B (dBμV) Avg Margin (dB) Avg Results (Pass/Fail) 15.2 20.1 35.3 55.8 -20.6 PASS 15.1 20.2 35.3 55.5 -20.2 PASS 15.1 20.1 35.3 55 -19.8 PASS 13.4 20.2 33.6 52.7 -19 PASS 13.6 20.2 33.8 51.3 -17.6 PASS



Test Report for ASSA ABLOY Inc • Report No. ET1639-3

September 23, 2019

Bureau Veritas Consumer Product Services Inc.

Conducted Emissions per CISPR 16-2-1

Peak Detector Data

Notes:

EUT: BLE9118K Neutral

EUT Mode of Operation: 24V DC

Work Order # - T1639 EUT Power Input - 24VDC

Test Site - CEMI-2

Conditions: - 22.5°C; 48.8%RH; 1009mBar

Test Engineer - AV

Data Taken at 01:52:04 PM, Monday, August 05, 2019

Frequency	Raw Pk Reading	Correction Factor	Adjusted Pk Amplitude	QP Lim: Mains_FCC&CISP R_QP_Class_B	Margin to the QP Limit	Pk to QP Limit Results	Worst Margin (QP Limit)
(MHz)	(dBµV)	(dB)	(dBµV)	(dBμV)	(dB)	(Pass/Fail)	(dB)
0.15	34.4	20.2	54.6	66	-11.4	PASS	
0.184	33.6	20.3	53.9	64.3	-10.4	PASS	
0.219	32.4	20.2	52.6	62.9	-10.3	PASS	
0.272	29.9	20.2	50.1	61.1	-11	PASS	
0.304	28	20.2	48.2	60.1	-11.9	PASS	
13.559	35.2	20.5	55.7	60	-4.3	PASS	-4.3

Bureau Veritas Consumer Product Services Inc.

Conducted Emissions per CISPR 16-2-1, CISPR Average Detector

Final Average Detector Data

Notes:

EUT: BLE9118K Neutral

EUT Mode of Operation: 24V DC

Work Order # - T1639 EUT Power Input - 24VDC

Test Site - CEMI-2

Conditions: - 22.5°C; 48.8%RH; 1009mBar

Test Engineer - AV

Data Taken at 01:52:04 PM, Monday, August 05, 2019

Frequency (MHz)	Raw Avg Reading (dBµV)	Correction Factor (dB)	Adjusted Avg Amplitude (dBµV)	Av Lim: Mains_FCC&CISP R_Avg_Class_B (dBμV)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)
13.56	27.5	20.5	48	50	-2	PASS	-2



Test Equipment Used

Rev. 7/30/2019								
Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Rental MXE EMI Receiver(1168255)	20Hz-8.4GHz	N9038A	Agilent	MY53290009	1168255	1	8/23/2019	8/23/2018
LISNs/Measurement Probes	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
LISN Asset 1732	150kHz-30MHz	LI-150A	Com-Power	201094	1732	- 1	3/19/2020	3/19/2019
LISN Asset 1733	150kHz-30MHz	LI-150A	Com-Power	201095	1733	- 1	3/19/2020	3/19/2019
Conducted Test Sites (Mains / Telco)	FCC Code		VCCI Code			Cat	Calibration Due	Calibrated on
CEMI 2	719150		A-0015			III	NA	N/A
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	- 1	5/15/2020	5/15/2018
Asset #2655		1235C97	Control Company	181683829	2655	- 1	4/3/2020	4/3/2019
Cables	Range		Mfr			Cat	Calibration Due	Calibrated on
CEMI-02	9kHz - 2GHz		C-S			II	4/10/2020	4/10/2019

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.





Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz) NIST	5.6dB	N/A
CISPR [no table (i.e. floor standing)]	4.6dB	5.2dB (Ucispr)
CISPR[table present] Radiated Emissions (1-26.5GHz) [no table (i.e. floor standing)]	6.0dB 4.6dB	N/A
Radiated Emissions (1-26.5GHz) [table present]	6.3dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions NIST	3.9dB	N/A
CISPR Telco Conducted Emissions (Current)	3.6dB 2.9dB	3.6dB (Ucispr) N/A
, ,		
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23 x 10 ⁻⁸	1 x 10 ⁻⁷
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation: Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		





Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

- 1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
- 2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
- 3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
- 4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
- 5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS", "MTL", "ACTS", "MTL-ACTS" and CURTIS-STRAUS (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
- 6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
- 7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
- 8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
- 9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
- 10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
- 11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only were such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
- 12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.





13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.

14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B)NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10.000. WHICHEVER IS THE LESSER AMOUNT.

- 16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.
- 17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

Rev.160009121(2)_#684340 v13CS



