Test Report



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Report No	EQ1125-2
-----------	----------

ASSA ABLOY Inc. Client

Address 110 Sargent Drive

New Haven, CT, 06511

Phone 203-499-6836

Items tested Aperio V3 iN100

FCC ID U4A-SCYMCA1 6982A-SCYMCA1 IC

FRN 0016550824

Equipment Type Part 15 Low Power Communication Device Transmitter

Equipment Code DXX **Emission Designator** 2K03F1D

> **FCC Rule Parts** 47 CFR 15.209, RSS-210 Issue 8

Test Dates 05/16/2016 through 05/26/2016

Results As detailed within this report

Prepared by

Jason/Haley – Test Engineer

Authorized by

C Engineer

Issue Date

7/11/2016

Conditions of Issue

This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 15 of this report.

Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under

Contents

Contents	2
Summary	3
Test Methodology	
Product Tested - Configuration Documentation	
Test Results	
Fundamental Emission	6
Radiated Spurious Emissions	7
99% Occupied Bandwidth	
Measurement Uncertainty	14
Conditions Of Testing	

Form Final Report REV 7-20-07 (DW)



Summary

This test report supports a "Limited Modular Approval" certification application of a transmitter operating pursuant to 47 CFR 15.209 and RSS-210. The product is the Aperio V3 iN100. Its operating frequency is 125kHz.

We found that the product met the above requirements without modifications. Steve Morse from ASSA ABLOY Inc. was present during testing. The test sample was received in good condition.

Release Control Record Issue No. Reason for change

1 Original Release

Date Issued July 13, 2016



186-8828

Test Methodology

All testing was performed according to the following rules/procedures/documents; CFR 47 Part 15.209, RSS-210 Issue 8, RSS-Gen Issue 4 and ANSI C63.10-2013. Radiated Emissions were maximized by rotating the device around three orthogonal axes as well as varying the test antenna's height and polarity. The device antenna cannot be maximized separately.

The EUT operating voltage is 9VDC from battery. Fresh batteries were used during testing. The environmental conditions during each test are detailed in the results tables for each section. The following bandwidths were used during radiated spurious and line conducted emissions.

Frequency	RBW	VBW
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz

Release Control Record Reason for change Issue No.

Original Release

Date Issued July 13, 2016



Product Tested - Configuration Documentation

					EUT	Configuration									
Work	Order:	Q1125				-									
Co	mpany:	ASSA	ABLOY Inc												
Company A	ddress:	110 Sa	rgent Drive												
		New H	laven, CT, 00	5511											
(Contact:	Steve I	Morse												
				MN			PN				SN				
	EUT:		IN100 IN100 1												
EUT Desc			rio V3												
EUT Max Fre		2475 N													
EUT Min Fre	quency:	0.032 1	MHz												
								1							
Support Equipmen	t			M						SN					
Laptop computer			dell												
Sargent 12V Supply			3521 Sample 1												
Sargent 24V Supply				352						Sample					
AC/DC Brick				SYS1308-	2424-W2					SW-241	PR				
		_	ı	T					1			1			
Port Label	Por	t Type	# ports	# populated	cable type	shielded		ferrites	length (m)	in/out	under test	comment			
DC Power input	Powe	er DC	1	1	Power DC	No	N	Ío	10	in	yes	*not used for emissions. emissions done with battery power			
USB setup port	USB		1	1	USB	Yes	N	lo	1	in	yes	*used to setup the radio power and channels			
	MID														
For emissions testing				the client C	aondo ono oi	to the EUT	. TICT	D cotting	a tha nadia r	matana TI	n the legt-	a and wak and			
disconnected and the							USI	ь, setting up	o me radio para	meters. The	ii ine iaptoj	and usb are			
disconnected and the	EUI COL	imues of	craung III u	at moue until ba	uery power is n	emoveu.									
Performance Criter	rio.														
Client operated	ıa.														
Chem operated															

Test Results

Fundamental Emission

LIMIT

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300

[15.209 (a)]

MEASU	REMENT	S/RE	SULT	S											
Radiated	l Emissic	ns Tab	le												
Date:	17-May-16		Company:	AssaAbloy	/					1	Nork Order:	Q1125			
Engineer:	Jason Haley		EUT Desc:	Aperio V3	V3 iN100 EUT Operating Voltage/Frequency: Battery										
Temp:	22°C		Humidity:	27%		Pressure:	ıre: 1013mBar								
	Freque	ncy Range:	9kHz to 30	MHz					Measureme	nt Distance:	3 m				
Notes:	Peak Readings	S							EU.	T Max Freq:	125kHz				
Antenna Preamp Antenna Cable Adjusted FCC Part 15.209															
Polarization	Frequency	Reading	Factor	Factor	Factor	Reading	Limit	Margin	Result	Limit	Margin	Result			
(0° - 90°)	(MHz)	(dBµV)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dBµV/m)	(dB)	(Pass/Fail)			
0	0.125	15.1	0.0	63.6	0.1	78.8				105.7	-26.9	Pass			
90	0.125	14.6	0.0	63.6	0.1	78.3				105.7	-27.4	Pass			
Table	e Result:	Pass	by	-26.9	dB				W	orst Freq:	0.125	MHz			
Test Site:	EMI Chamber	1	Cable 1:	Asset #20	51			Cable 2:	Asset #1785	;	Cable 3:				
Analyzer:	MXE		Preamp:	none				Antenna:	Sm Loop (lo	w)	Preselector:				
CSsoft Radiate			v 1.017.162								Copyright Curt	is-Straus LLC 2000			
Adjusted Read	ıng = Reading -	Preamp Fac	ctor + Anter	nna Factor	+ Cable F	actor									

Rev	5/13/2016 Spectrum Analyzers / Receivers /Preselectors MXE EM Receiver	Range 20Hz-26.5GHz	MN N9038A	Mfr Aglient	SN MY51210181	A see t 2093	Cat	Calibration Due 7/21/2016	Calibrated on 7/21/2015
	Radiated Emissions Sites EMI Chamber 1	FCC Code 719150	IC Code 27 62A-6	VCCI Code A-0015	Range 30-1000MHz		Cat	Calibration Due 3/21/2017	Calibrated on 3/21/2015
	Preamps /Coupiers Attenua tors / Fill ters Red-//hite	Range 0.009-2000MHz	MN ZFL-1000-LN	Mfr CS	SN N/A	A see t 1258	Cat	Calibration Due 12/27/2016	Calibrated on 12/27/2015
	Antennes Red-Brown Bibg Small Loop	Range 30-2000MHz 10kHz-30MHz	MN JB1 PLA-130/A	Mfr Sunol ARA	\$ N A0032406 1024	A see t 1218 755	Cat 	Calibration Due 12/4/2016 5/29/2016	Calibrated on 12/4/2014 5/29/2014
	Me to crological Me ters Weather Clock (Piessure Only) TH A#2080		MN BA928 HTC-1	Mfr Oregon Scientific HDE	\$ N C3166-1	A see t 831 2080	Cat	Calibration Due 4/28/2017 4/5/2017	Calibrated on 4/28/2016 4/5/2016
	Cables Asset #1785 Asset #2051	Range 9kHz - 18GHz 9kHz - 18GHz		Mfr Florida RF Florida RF			Cat	Calibration Due 1/5/2017 3/2/2017	Calibrated on 1/5/2016 3/2/2016

All equipment is callbrated using standards traceable to NIST or other nationally recognized calibration standard.





Radiated Spurious Emissions LIMITS

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

[15.209(a)]

MEASUREMENTS / RESULTS

Date:	17-May-16		Company:	AssaAbloy	,					,	Work Order:	Q1125		
Engineer:	Jason Haley		EUT Desc: Aperio V3 iN100				EUT Operating Voltage/Frequency: Battery							
Temp:	22°C		Humidity:	27%		Pressure:	1013mBar							
	Freque	ncy Range:	9kHz to 30	MHz					Measureme	nt Distance:	3 m			
Notes:	Peak Reading	S							EU	Г Max Freq:	125kHz			
Antenna			Preamp	Antenna	Cable	Adjusted				F	CC Part 15.2	209		
Polarization	Frequency	Reading	Factor	Factor	Factor	Reading	Limit	Margin	Result	Limit	Margin	Result		
(0° - 90°)	(MHz)	(dBµV)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dBµV/m)	(dB)	(Pass/Fail)		
NO	emissions foun													
Test Site:	EMI Chamber	1	Cable 1:	Asset #20	51			Cable 2:	Asset #1785		Cable 3:			
	MXE		Preamp:	nono				Antonno	Sm Loop (lov	A/)	Preselector:			

Radiated Emissions Table

Company: AssaAbloy Date: 17-May-16 Work Order: Q1125 Engineer: Jason Haley EUT Desc: Aperio V3 iN100 EUT Operating Voltage/Frequency: Battery

Temp: 22°C Humidity: 27% Pressure: 1013mBar

Frequency Range: 30-1000MHz Measurement Distance: 3 m

EUT Max Freq: 125kHz Notes: Peak Readings

											FCC Class I	3
Antenna			Preamp	Antenna	Cable	Adjusted						
Polarization	Frequency	Reading	Factor	Factor	Factor	Reading	Limit	Margin	Result	Limit	Margin	Result
(H/V)	(MHz)	(dBµV)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dBµV/m)	(dB)	(Pass/Fail)
N.F. horiz	30.0	30.5	25.5	21.4	0.5	26.9				40.0	-13.1	Pass
vert	47.94	39.1	25.4	9.0	0.5	23.2				40.0	-16.8	Pass
N.F. horiz	100.0	30.3	25.5	10.2	0.7	15.7				43.5	-27.8	Pass
vert	149.32	37.1	25.9	12.5	1.0	24.7				43.5	-18.8	Pass
vert	152.43	36.6	25.9	12.5	1.0	24.2				43.5	-19.3	Pass
vert	158.61	39.7	25.9	12.3	1.0	27.1				43.5	-16.4	Pass
vert	161.79	44.0	25.9	12.2	1.0	31.3				43.5	-12.2	Pass
N.F. horiz	200.0	30.8	25.8	12.6	1.1	18.7				43.5	-24.8	Pass
Horiz	300.96	37.9	25.6	13.4	1.2	26.9				46.0	-19.1	Pass
N.F. horiz	500.0	31.7	25.3	18.0	1.4	25.8				46.0	-20.2	Pass
N.F. horiz	1000.0	30.8	24.9	23.4	2.2	31.5				54.0	-22.5	Pass

161.79 MHz Table Result: -12.2 dB Worst Freq: Pass by

Cable 1: Asset #2051 Test Site: EMI Chamber 1 Cable 2: Asset #1785 Cable 3: --

Preamp: Red-White Analyzer: MXE Preselector: ---Antenna: Red-Brown CSsoft Radiated Emissions Calculator v1.017.162
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor Copyright Curtis-Straus LLC 200

Radiated	Emissio	ns Tab	ole						
Date:	17-May-16			Compa	ny: AssaAbl	oy			Work Order: Q1125
Engineer:	Jason Haley			EUT De	sc: Aperio V	3 iN100		EUT Operat	ing Voltage/Frequency: Battery
Temp:	22°C			Humid	ity: 27%		Pressure:	1013mBar	
		Freque	ncy Rang	e: 1-6GHz	:			Measureme	nt Distance: 3 m
Notes:	Noise Floor Rea	dings						EU.	T Max Freq: 125kHz
	125kHz Radio A	ctive							
								FCC Class B High Frequency -	FCC Class B High Frequency -
1 - 1				_			 	DII	A

Antenna		Peak	Average	Preamp	Antenna	Cable	Adjusted	Adjusted	FCC Clas	s B High Fre Peak	equency -	FCC Cla	ss B High Fr Average	equency -
Polarization	Frequency	Reading	Reading	Factor	Factor	Factor	Peak Reading	Avg Reading	Limit	Margin	Result	Limit	Margin	Result
(H/V)	(MHz)	(dBµV)	(dBµV)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dBµV/m)	(dB)	(Pass/Fail)
Vert	1000.0	30.2	20.0	20.9	24.2	2.2	35.7	25.5	74.0	-38.3	Pass	54.0	-28.5	Pass
Vert	2000.0	27.0	17.3	19.1	28.0	3.0	38.9	29.2	74.0	-35.1	Pass	54.0	-24.8	Pass
Vert	3000.0	28.2	17.9	19.9	29.9	3.6	41.8	31.5	74.0	-32.2	Pass	54.0	-22.5	Pass
Vert	4000.0	28.6	17.5	18.9	32.6	4.5	46.8	35.7	74.0	-27.2	Pass	54.0	-18.3	Pass
Vert	5000.0	27.9	17.0	17.9	33.0	5.0	48.0	37.1	74.0	-26.0	Pass	54.0	-16.9	Pass
Vert	6000.0	28.7	16.8	17.5	34.1	6.4	51.7	39.8	74.0	-22.3	Pass	54.0	-14.2	Pass
Horz	1500.0	26.95	18.7	19.0	25.5	2.7	36.2	27.9	74.0	-37.8	Pass	54.0	-26.1	Pass
Horz	2500.0	27.5	18.9	20.2	28.5	3.6	39.4	30.8	74.0	-34.6	Pass	54.0	-23.2	Pass
Horz	3500.0	28.3	18.6	19.2	31.3	4.0	44.4	34.7	74.0	-29.6	Pass	54.0	-19.3	Pass
Horz	4500.0	28.0	17.4	17.9	32.4	4.7	47.2	36.6	74.0	-26.8	Pass	54.0	-17.4	Pass
Horz	5500.0	28.6	16.7	17.6	33.9	5.6	50.5	38.6	74.0	-23.5	Pass	54.0	-15.4	Pass

Table Result: Pass -14.2 dB Worst Freq: 6000.0 MHz

Test Site: EMI Chamber Cable 2: Asset #1785 Cable 3: Preselector: ---

Analyzer: MXE Preamp: Asset #1517

CSsoft Radiated Emissions Calculator v1.017.162

udjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor Antenna: Orange Horn Copyright Curtis-Straus LLC 2





Radiated Emissions Table Company: AssaAbloy Date: 17-May-16 Work Order: Q1125 Engineer: Jason Haley EUT Desc: Aperio V3 iN100 EUT Operating Voltage/Frequency: Battery Temp: 22°C Humidity: 27% Pressure: 1013mBar Frequency Range: 6-18GHz Measurement Distance: 1 m Notes: Noise Floor Readings EUT Max Freq: 125kHz 125kHz Radio Active FCC Class B High Frequency FCC Class B High Frequency Cable Adjusted Adjusted Polarization Frequency Reading Reading Factor Factor Factor Peak Reading Avg Reading Limit Margin Result Limit Margin Result (MHz) (H/V) (dBµV) (dBµV) (dB) (dB) (dBµV/m) (dBµV/m) dBµV/n 6000.0 27.3 17.8 17.5 34.8 83.5 -32.5 -22.0 Pass 27.91 Horz 7000.0 16.7 16.3 36.0 6.7 54.3 43.1 83.5 -29.2 Pass 63.5 -20.4 Pass 8000.0 27.1 17.0 54.3 44.2 -29.2 -19.3 16.5 37.4 83.5 63.5 Pass Vert 6.3 Pass Horz 9000.0 27.92 17.2 17.4 37.9 6.7 55.1 44.4 46.9 83.5 -28.4 Pass 63.5 -19.1 Pass 10000.0 17.2 57.5 63.5 -16.6 Pass Vert 27.8 17.1 38.4 8.4 83.5 -26.0 Pass Horz 11000.0 26.2 17.4 16.5 8.1 47.5 -27.2 63.5 -16.0 17.6 18.2 15.6 16.5 62.9 64.7 52.3 52.6 83.5 83.5 63.5 63.5 13000.0 28.2 40.7 9.6 -20.6 Pass -11.2 Pass 14000.0 -10.9 42.3 Pass Horz 30.3 8.6 -18.8 Pass 15000.0 19.1 50.3 83.5 -22.0 -13.2 Vert 16000.0 31.6 20.8 16.5 37.9 9.1 62.1 51.3 83.5 -21.4 Pass 63.5 -12.2 Pass 17000.0 16.3 66.2 -17.3 Pass Table Result: Worst Freq: Pass bv -7 4 dB 17000 0 MHz Test Site: EMI Chamber Analyzer: MXE Cable 1: Asset #2051 Cable 2: Asset #1785 Antenna: Orange Horn Cable 3: Preamp: Asset #1517 Preselector: --soft Radiated Emissions Calculator v 1.017.162 Copyright Curtis-Straus LLC 2

Rev. 5/13/2016								
Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	1	7/21/2016	7/21/2015
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range		Cat	Calibration Due	Calibrated on
EMI Chamber 1	719150	2762A-6	A-0015	30-1000MHz		II	3/21/2017	3/21/2015
Preamps /Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Red-White	0.009-2000MHz	ZFL-1000-LN	CS	N/A	1258	II	12/27/2016	12/27/2015
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Red-Brown Bilog	30-2000MHz	JB1	Sunol	A0032406	1218	- 1	12/4/2016	12/4/2014
Small Loop	10kHz-30MHz	PLA-130/A	ARA	1024	755	I	5/29/2016	5/29/2014
Meteorological Meters		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	- 1	4/28/2017	4/28/2016
TH A#2080		HTC-1	HDE		2080	II	4/5/2017	4/5/2016
Cables	Range		Mfr			Cat	Calibration Due	Calibrated on
Asset #1785	9kHz - 18GHz		Florida RF			II	1/5/2017	1/5/2016
Asset #2051	9kHz - 18GHz		Florida RF			II	3/2/2017	3/2/2016

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

djusted Reading = Reading - Preamp Factor + Anteni

	17-May-16		Company: AssaAbloy									١	Vork Order:	Q1125
Engineer:	Jason Haley			EUT Desc:	: Aperio V3 iN100 EUT Operating Voltage/Frequency: Bat								Battery	
Temp:	22°C			Humidity:	27%		Pressure: 1013mBar							
		Freque	ncy Range:	18-25GHz							Measureme	nt Distance:	0.1 m	
	Noise Floor Re 125kHz radio										EU.	Γ Max Freq:	125kHz	
Antenna		Peak	Average	Preamp	Antenna	Cable	Adjusted	_ ~					equency - FCC Class B High Frequency Average	
olarization	Frequency	Reading	Reading	Factor	Factor	Factor	Peak Reading	Avg Reading	Limit	Margin	Result	Limit	Margin	Result
(H/V)	(MHz)	(dBµV)	(dBµV)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dBµV/m)	(dB)	(Pass/Fail
Maximized	24135.0	45.93	45.9	40.9	40.3	6.9	52.2	52.2	103.5	-51.3	Pass	83.5	-31.3	Pass
Maximized	18000.0	37.4	37.4	39.4	40.1	5.6	43.7	43.7	103.5	-59.8	Pass	83.5	-39.8	Pass
Maximized	20000.0	39.11	39.1	41.6	40.2	6.1	43.8	43.8	103.5	-59.7	Pass	83.5	-39.7	Pass
Maximized	22000.0	39.13	39.1	42.0	40.5	6.7	44.3	44.3	103.5	-59.2	Pass	83.5	-39.2	Pass
Maximized	25000.0	39.27	39.3	40.9	40.3	7.0	45.7	45.7	103.5	-57.8	Pass	83.5	-37.8	Pass
Table	e Result:		Pass	by	-31.3	dB					W	orst Freq:	24135.0	MHz
Test Site:	EMI Chamber			Cable 1:	EMIR-HIGI	H-07				Cable 2:			Cable 3:	



Rev. 5/13/2016 Spectrum Analyzers / Receivers / Preselectors MXE FMI Receiver	Range 20Hz-26.5GHz	MN N9038A	Mfr Agilent	SN MY51210181	Asset	Cat	Calibration Due	Calibrated on 7/21/2015
IVIAL LIVII Receiver	20112-20.50112	NOCUEN	Agilent	WIT51210161	2093		1/21/2010	1/21/2015
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range		Cat	Calibration Due	Calibrated on
EMI Chamber 1	719150	2762A-6	A-0015	1-18GHz		1	5/23/2017	5/23/2015
Preamps/Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF (Yellow)	18-26.5GHz	AFS4-18002650-60-8P-4	CS	467559	1266	II	3/8/2017	3/8/2016
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF (White) Horn	18-26.5GHz	801-WLM	Waveline	758	758	Ш	Verify before Use	date of test
								5/29/2014
Meteorological Meters		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	- 1	4/28/2017	4/28/2016
TH A#2080		HTC-1	HDE		2080	II	4/5/2017	4/5/2016
								4/5/2016
Cables	Range		Mfr			Cat	Calibration Due	Calibrated on
REMI-High-07	1 - 26.5GHz	TRU-21B0707-120	TRU			II	8/7/2016	8/7/2015
								1/5/2016
All equipment is calibrated using standards traceable to NIS	ST or other nationall	y recognized calibration sta	andard.					3/2/2016





99% Occupied Bandwidth

REQUIREMENT


When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. [RSS-GEN 4.6.1]

Date:	te: 29-Jun-16		Company:	AssaAbloy	/						W	ork Order:	Q1125	
Engineer:	Yunus Faz	iloglu	EUT Desc:	Aperio V3	iN100				EUT	Operating	Voltage/F	requency:	Battery	
Temp:	24.4°C		Humidity:	54%		Pressu	re: 1001	mBar						
	Fund	amental Freque	ncy: 125kHz											
Frequency						Measur	d 99% Oc	cupied	Bandw idth	1				
	(k	-lz)					(kl	-lz)						
	12	5.0					2.0	03						
Test Site: CEMI1		EMI1 Cable 1		EMIR-15	An	alyzer: 1	10		Antenna:	A00067		Cable 3:		
			PreAmp	A798							Cop	yright Curtis-Sti	aus LLC 2	

💥 Agilent

13:06:01 Jun 29, 2016

R T

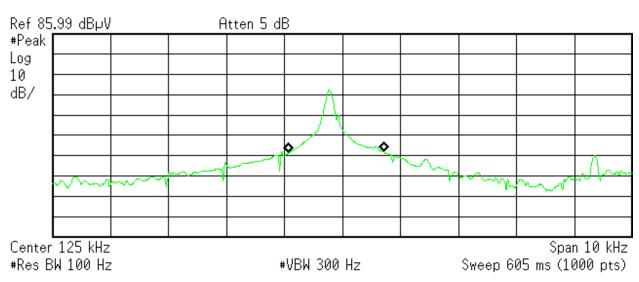

Occupied Bandwidth 2.0323 kHz

Occ BW % Pwr 99.00 % × dB -26.00 dB

Transmit Freq Error -36.283 Hz x dB Bandwidth 1.106 kHz

C:temp.gif file saved





Rev. 6/29/2016 **Meteorological Meters** MN Mfr SN Cat **Calibration Due** Calibrated on Weather Clock (Pressure Only) BA928 Oregon Scientific C3166-1 831 4/28/2018 4/28/2016 TH A#2082 HTC-1 HDE 2082 Ш 4/5/2017 4/5/2016 Spectrum Analyzers / Receivers / Preselectors Range Mfr SN **Calibration Due** Calibrated on 9kHz-26.5GHz E4407B Agilent SG44210511 1510 1/21/2017 1/21/2016 Antennas Range MN Mfr SN Asset Cat Calibration Due Calibrated on 20Hz-5MHz 9704-1154 6511 EMCO 67 6/14/2018 6/14/2016 Large Loop Cables Range Mfr Cat **Calibration Due** Calibrated on 9kHz - 2GHz REMI-15 C-S 9/10/2016 9/10/2015 Preamps/Couplers Attenuators / Filters Mfr **Calibration Due** Calibrated on Range SN Cat Asset 0.009-2000MHz ZFL-1000-LN N/A 798 1/29/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.





AC Line Conducted Emissions LIMITS

Frequency of	Quasi-peak limit	Average limit
emission (MHz)	(dBµV)	(dBµV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

^{*}Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

MEASUREMENTS / RESULTS

Da	te: 17-May-16						Company:	AssaAbloy				v	Vork Order:	Q1125
	er: Chris Bramley							Aperio V3 iN	100 - 125kHz	Radio				
	np: 22.5 ℃						Humidity:	32%				Pressure: 1001 mBar		
Not	tes: Sargent 12V E	C Supply												
						Frequ	ency Range:	0.15-30MHz		EUT I	nput Voltage.	/Frequency: 1	120V/60Hz	
	Quasi	-Peak	Aver	age	LIS	SN						İ		
	Read	dings	Read		Fac	tors	Cable	ATTN		CISPR CI	ass B	FC	FCC/CISPR Class B	
Frequency	QP1	QP2	AVG1	AVG2	L1	L2	Factor	Factor	QP Limit	Margin	Result	AVG Limit	Margin	Result
(MHz)	(dBµV)	(dBµV)	(dBµV)	(dBµV)	(dB)	(dB)	(dB)	(dB)	(dBµV)	(dB)	(Pass/Fail)	(dBµV)	(dB)	(Pass/Fai
0.150	31.8	33.4	26.3	28.5	-0.1	-0.2	-0.1	-20.8	66.0	-11.6	Pass	56.0	-6.4	Pass
1.050	6.7	5.9	3.7	4.2	-0.1	-0.1	-0.1	-20.8	56.0	-28.4	Pass	46.0	-20.9	Pass
4.760	9.9	8.5	8.5	7.1	-0.1	-0.1	-0.2	-20.8	56.0	-25.0	Pass	46.0	-16.5	Pass
12.500	6.0	4.2	2.2	1.3	-0.1	-0.1	-0.2	-20.8	60.0	-32.9	Pass	50.0	-26.7	Pass
16.900	9.3	7.4	7.5	4.3	-0.1	-0.2	-0.2	-20.9	60.0	-29.4	Pass	50.0	-21.2	Pass
19.100	6.9	1.0	4.0	0.3	-0.1	-0.2	-0.3	-20.9	60.0	-31.9	Pass	50.0	-24.8	Pass
Resu	lt: Pass						Worst	Margin:	-6.4	dB	Freq	uency:	0.150	MHz
urement Devic	e: LISN ASSE	T 1730(Line	1) LISN AS	SET 1731	(Line 2)		Cable:	CEMI-01			Spectrum	Analyzer: \$	SA EMIC	hamber (1
							Attenuator:	20dB Atter	nuator-07				CEMI5	

Rev. 5/13/2016 Spectrum Analyzers / Receivers / Preselectors SA EMI Chamber (1327)	Range 9kHz-13.2 GHz	MN E4405B	Mfr Agilent	SN MY45103416	Asset 1327	Cat I	Calibration Due 7/10/2016	Calibrated on 7/10/2015
LISNs/Measurement Probes LISN Asset 1730	Range 150kHz-30MHz	MN LI-150A	Mfr Com-Power	SN 201090	Asset 1730	Cat	Calibration Due	Calibrated on 3/10/2016
LISN Asset 1730 LISN Asset 1731	150kHz-30MHz	LI-150A LI-150A	Com-Power	201090	1731	i	3/10/2017	3/10/2016
Conducted Test Sites (Mains / Telco) CEMI 5	FCC Code 719150		VCCI Code A-0015			Cat III	Calibration Due NA	Calibrated on N/A
Meteorological Meters		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
TH A#2082		HTC-1	HDE		2082	II	4/5/2017	4/5/2016
Barometric A#2160		5396-0321	Monarch Instruments	4000060	2160	I	3/7/2017	3/7/2016
Cables	Range		Mfr			Cat	Calibration Due	Calibrated on
CEMI-01	9kHz - 2GHz		C-S			II	9/11/2016	9/11/2015
Attenuators 20dB Attenuator-07	Range 9kHz-2GHz	MN BW-N20W+	Mfr MCL	SN N/A	Asset	Cat II	Calibration Due 4/10/2017	Calibrated on 4/10/2016

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.





Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement Radiated Emissions (30-1000MHz)	Expanded Uncertainty k=2	Maximum allowable uncertainty
NIST CISPR	5.6dB 4.6dB	N/A 5.2dB (Ucispr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions NIST CISPR	3.9dB 3.6dB	N/A 3.6dB (Ucispr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23 x 10 ⁻⁸	1 x 10 ⁻⁷
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation: Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

- 1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
- 2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
- 3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
- 4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
- 5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS", "MTL", "ACTS", "MTL-ACTS" and CURTIS-STRAUS (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
- 6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
- 7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
- 8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
- 9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
- 10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
- 11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only were such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
- 12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.





13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.

14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B)NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10.000. WHICHEVER IS THE LESSER AMOUNT.

- 16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.
- 17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

Rev.160009121(2)_#684340 v13CS



