

Certification Test Report

**FCC ID: U4A-SCYPROX4
IC: 6982A-SCYPROX4**

**FCC Rule Part: 15.249
IC Radio Standards Specification: RSS-210**

ACS Report Number: 11-0282.W06.22.A

Manufacturer: Assa Abloy
Model: N2-PA/PK

Test Begin Date: August 23, 2011
Test End Date: August 23, 2011

Report Issue Date: September 9, 2011



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

A handwritten signature in black ink, appearing to read "Kirby Munroe", is placed over a horizontal line.

Reviewed by:
Kirby Munroe
Director, Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 14 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	3
2	TEST FACILITIES.....	4
2.1	LOCATION	4
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	4
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	5
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	5
2.3.2	<i>Open Area Tests Site (OATS)</i>	6
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	7
3	APPLICABLE STANDARD REFERENCES.....	7
4	LIST OF TEST EQUIPMENT.....	8
5	SUPPORT EQUIPMENT	9
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	9
7	SUMMARY OF TESTS.....	10
7.1	ANTENNA REQUIREMENT – FCC: SECTION 15.203	10
7.2	POWER LINE CONDUCTED EMISSIONS – FCC: SECTION 15.207 IC: RSS-GEN 7.2.4.....	10
7.2.1	<i>Measurement Procedure.....</i>	10
7.3	20dB / 99% BANDWIDTH – FCC: SECTION 15.215, IC: RSS-GEN 4.6.1	10
7.3.1	<i>Measurement Procedure.....</i>	10
7.3.2	<i>Measurement Results.....</i>	10
7.4	FUNDAMENTAL FIELD STRENGTH – FCC: SECTION 15.249(A) IC: RSS-210 A2.9(A)	12
7.4.1	<i>Measurement Procedure.....</i>	12
7.4.2	<i>Measurement Results.....</i>	12
7.5	RADIATED SPURIOUS EMISSIONS - FCC: SECTION 15.249(A)(D)(E); IC:RSS-210 A2.9(A)(B).....	13
7.5.1	<i>Measurement Procedure.....</i>	13
7.5.2	<i>Measurement Results.....</i>	13
7.5.3	<i>Sample Calculation:</i>	14
8	CONCLUSION	14

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210.

1.2 Product description

The N2-PA/PK is a microprocessor controlled networked lock. It uses local wireless communication between the lock and a hub to connect to an access control system. The N2-PA/PK includes a 125kHz proximity reader and a 2.4GHz IEEE 802.15.4 radio.

The report applies to the 2.4GHz IEEE 802.15.4 radio only. A separate test report covers the 125kHz proximity radio operation.

Technical Information:

Band of Operation: 2405 – 2480 MHz
Number of Channels: 16
Modulation Format: O-QPSK
Antenna Type/Gain: Chip Antenna, 0.5dBi Gain
Operating Voltage: 9 VDC (Battery)

Manufacturer Information:

Assa Abloy Inc.
110 Sargent Dr.
New Haven, CT 06511

Test Sample Serial Number(s): 0598

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

The EUT was tested in an orientation of typical installation. No deviations from the standards were made or special considerations applicable.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 511277

Industry Canada Lab Code: 4175A

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

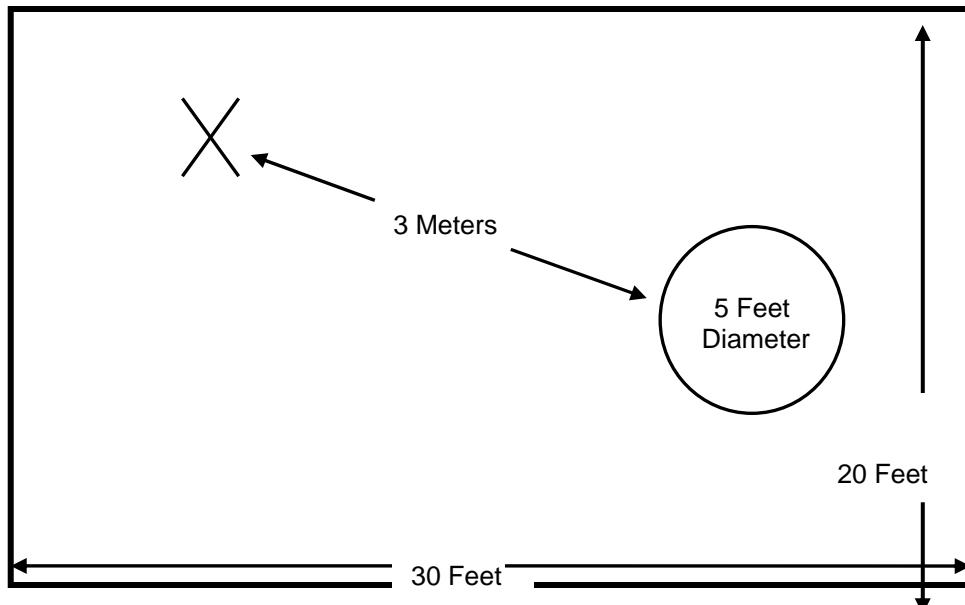


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

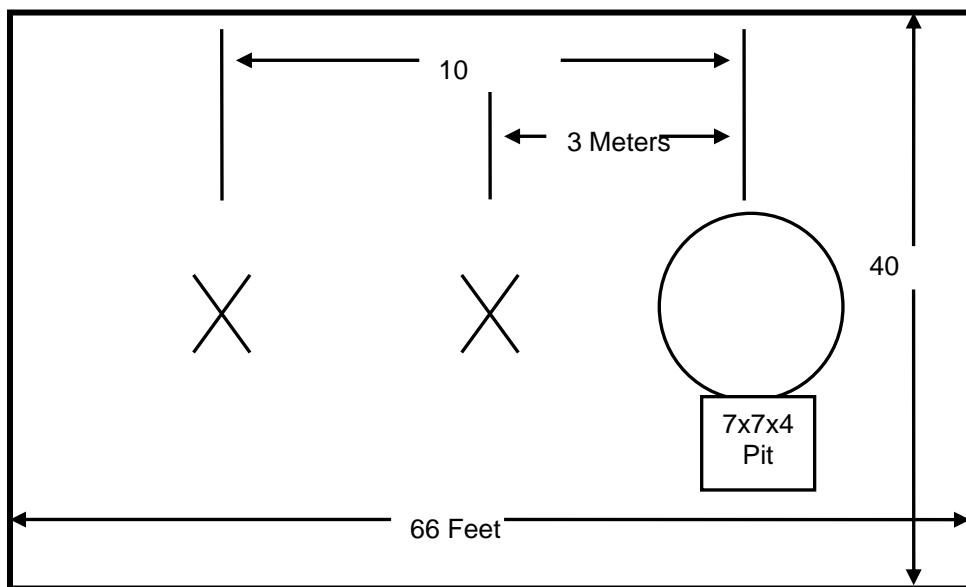


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal group reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

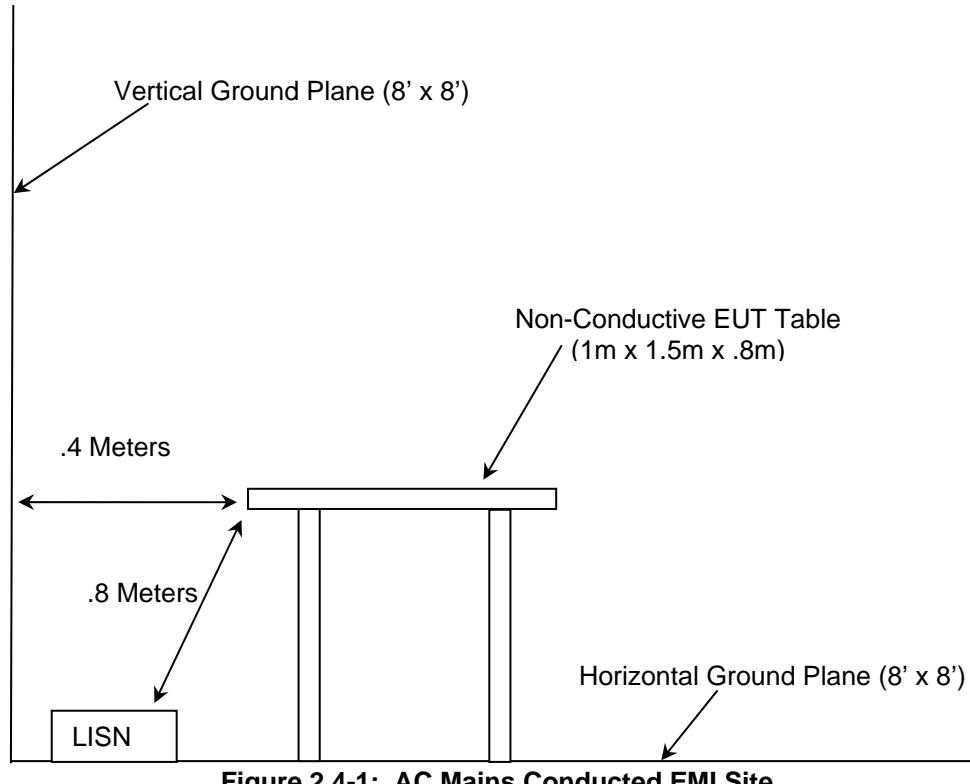


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2011
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2011
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8, December 2010
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, December 2010.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment


AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESMI - Display	Spectrum Analyzers	833771/007	9/23/2010	9/23/2012
2	Rohde & Schwarz	ESMI-Receiver	Spectrum Analyzers	839587/003	9/23/2010	9/23/2012
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/27/2011	4/27/2013
41	Electro-Metrics	BIA-25	Antennas	2925	12/21/2010	12/21/2012
73	Agilent	8447D	Amplifiers	2727A05624	3/21/2011	3/21/2012
167	ACS	Chamber EMI Cable Set	Cable Set	167	1/26/2011	1/26/2012
283	Rohde & Schwarz	FSP40	Spectrum Analyzers	1000033	8/31/2010	8/31/2011
291	Florida RF Cables	SMRE-200W-12.0-SMRE	Cables	None	12/7/2010	12/7/2011
292	Florida RF Cables	SMR-290AW-480.0-SMR	Cables	None	4/11/2011	4/11/2012
334	Rohde&Schwarz	3160-10	Antennas	45576	11/4/2010	NCR
335	Suhner	SF-102A	Cables	882/2A	10/29/2010	10/29/2011
338	Hewlett Packard	8449B	Amplifiers	3008A01111	3/24/2011	3/24/2012
340	Aeroflex/Weinschel	AS-20	Attenuators	7136	10/5/2010	10/5/2011
345	Suhner Sucoflex	102A	Cables	1077/2A	10/29/2010	10/29/2011
412	Electro Metrics	LPA-25	Antennas	1241	7/28/2010	7/28/2012
422	Florida RF	SMS-200AW-72.0-SMR	Cables	805	12/29/2010	12/29/2011
432	Microwave Circuits	H3G020G4	Filters	264066	7/11/2011	7/11/2012

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number
The EUT operates stand alone therefore no support equipment was utilized.				

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

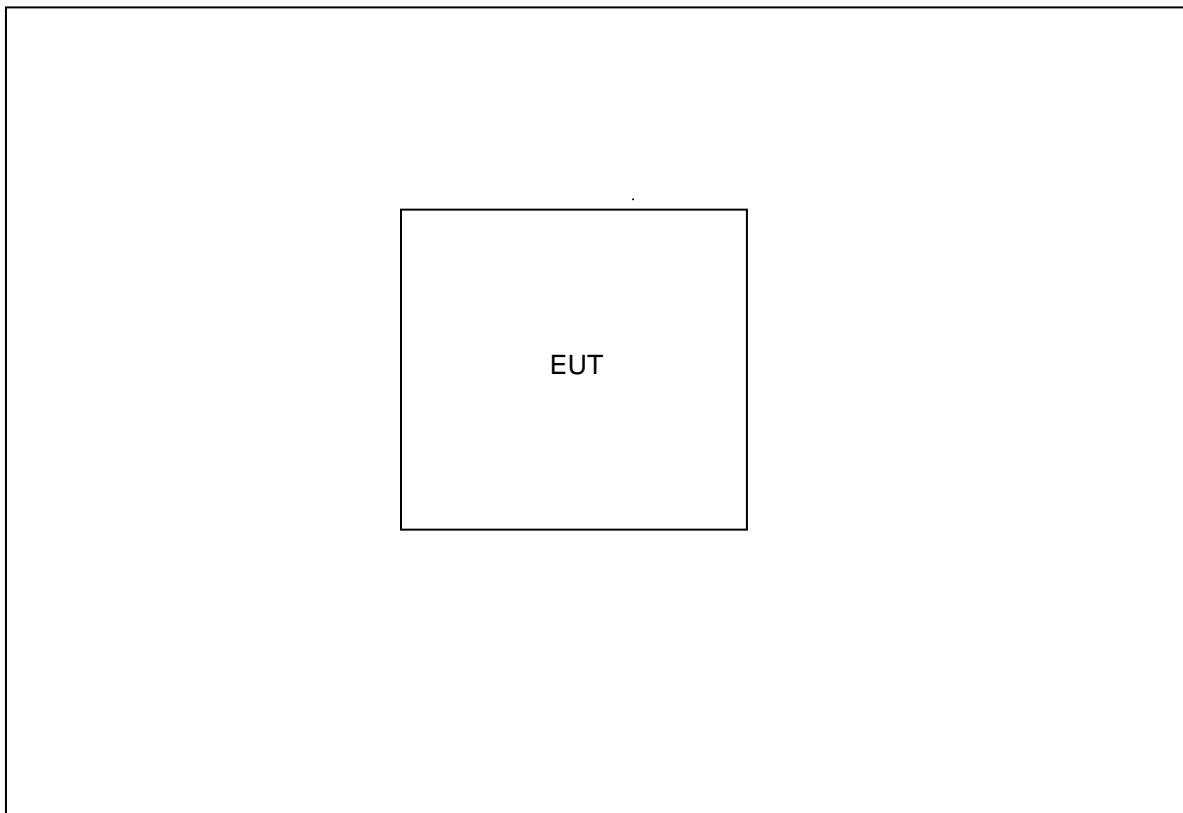

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The antenna used for the N2-PA/PK is an integral chip antenna with 0.5dBi gain, and therefore meets the requirements of Section 15.203.

7.2 Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 7.2.4

7.2.1 Measurement Procedure

The EUT is a battery operated device therefore AC power line conducted emissions is not applicable.

7.3 20dB / 99% Bandwidth – FCC: Section 15.215, IC: RSS-Gen 4.6.1

7.3.1 Measurement Procedure

The span of the spectrum analyzer display was set between two times and five times the occupied bandwidth (OBW) of the emission. The RBW of the spectrum analyzer was set to approximately 1 % to 5 % of the OBW. The 20dB bandwidth was measured between the lower and upper points on the emission which correspond to 20dB below the reference level previously established.







The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission and side bands. The RBW was set to ~ 1% of the span. The trace was set to max hold with a sample detector. The occupied bandwidth measurement function of the analyzer was used for the 99% bandwidth.

7.3.2 Measurement Results

Results are shown below in table 7.3.2-1 and figure 7.3.2-1 to 7.3.2-6:

Table 7.3.2-1: 20dB / 99% Bandwidth

Frequency [MHz]	20dB Bandwidth [MHz]	99% Bandwidth [MHz]
2405	2.50	2.40
2440	2.52	2.40
2480	2.52	2.42

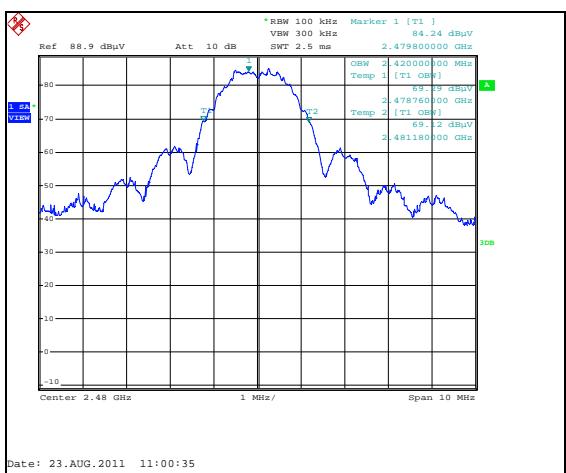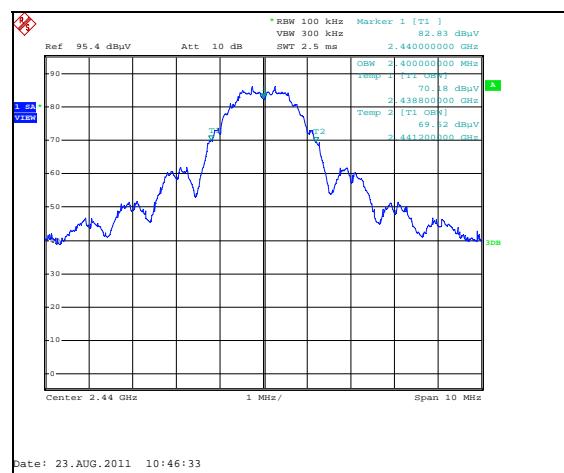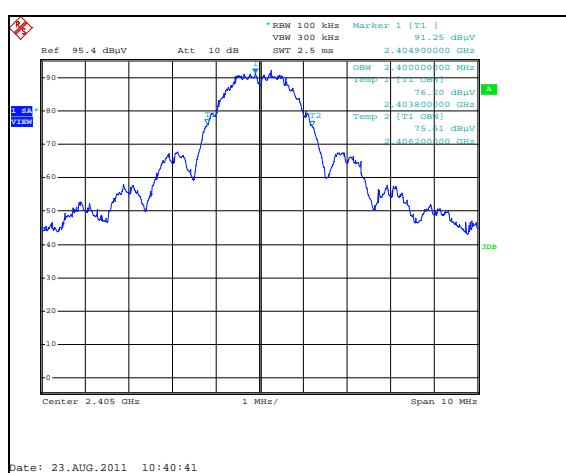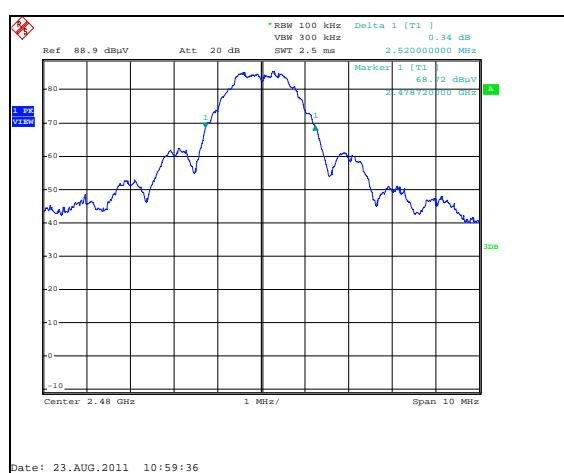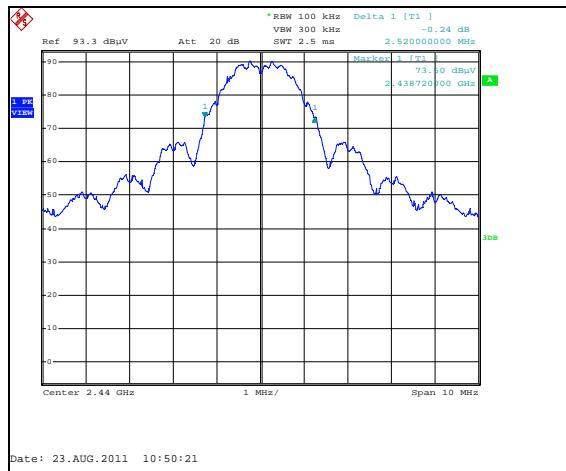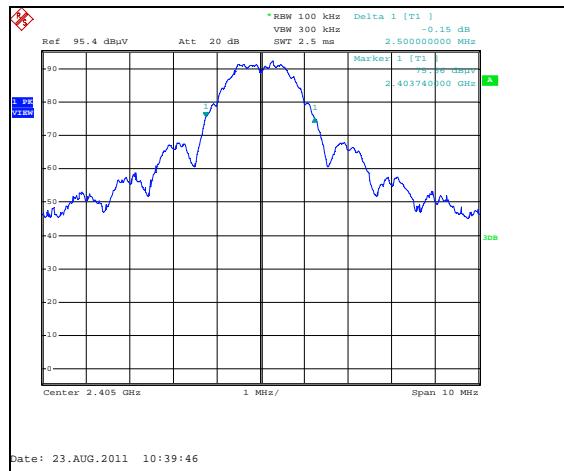

7.4 Fundamental Field Strength – FCC: Section 15.249(a) IC: RSS-210 A2.9(a)

7.4.1 Measurement Procedure

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For fundamentals below 1GHz, quasi-peak measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz. For fundamentals above 1GHz, peak and average measurements were made using a resolution bandwidth (RBW) of 1 MHz and a video bandwidth (VBW) of 3 MHz.

7.4.2 Measurement Results

Results are shown below in Table 7.4.2-1.

Table 7.4.2-1: Fundamental Field Strength

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2405	95.78	89.51	H	-5.39	90.39	84.12	114.0	94.0	23.6	9.9
2405	92.99	87.09	V	-5.39	87.60	81.70	114.0	94.0	26.4	12.3
2440	92.71	87.10	H	-5.23	87.48	81.87	114.0	94.0	26.5	12.1
2440	90.81	85.07	V	-5.23	85.58	79.84	114.0	94.0	28.4	14.1
2480	90.15	84.36	H	-5.06	85.09	79.30	114.0	94.0	28.9	14.7
2480	87.15	81.39	V	-5.06	82.09	76.33	114.0	94.0	31.9	17.6

7.5 Radiated Spurious Emissions - FCC: Section 15.249(a)(d)(e); IC:RSS-210 A2.9(a)(b)

7.5.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30MHz to 25 GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

All out of band emissions were evaluated, including any emissions at or near the band-edge.

7.5.2 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 25GHz are reported in the tables 7.5.2-1 to 7.5.2-3 below.

Table 7.5.2-1: Radiated Spurious Emissions Tabulated Data – 2405MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2389.33	51.14	40.11	H	-5.46	45.68	34.65	74.0	54.0	28.3	19.3
2389.38	50.19	39.32	V	-5.46	44.73	33.86	74.0	54.0	29.3	20.1
4810	49.10	38.89	H	2.06	51.16	40.95	74.0	54.0	22.8	13.1
4810	47.89	36.71	V	2.06	49.95	38.77	74.0	54.0	24.1	15.2
7215	47.07	36.12	H	7.84	54.91	43.96	74.0	54.0	19.1	10.0
7215	47.09	37.14	V	7.84	54.93	44.98	74.0	54.0	19.1	9.0

* Note: All emissions above 7215 MHz were attenuated below the permissible limit.

Table 7.5.3-2: Radiated Spurious Emissions Tabulated Data – 2440MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
4880	49.07	38.56	H	2.22	51.29	40.78	74.0	54.0	22.7	13.2
4880	48.01	37.52	V	2.22	50.23	39.74	74.0	54.0	23.8	14.3
7320	46.15	35.41	H	7.81	53.96	43.22	74.0	54.0	20.0	10.8
7320	46.46	35.82	V	7.81	54.27	43.63	74.0	54.0	19.7	10.4

* Note: All emissions above 7320 MHz were attenuated below the permissible limit.

Table 7.5.3-3: Radiated Spurious Emissions Tabulated Data – 2480MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2483.5	58.09	46.76	H	-5.04	53.05	41.72	74.0	54.0	21.0	12.3
2483.5	55.17	43.76	V	-5.04	50.13	38.72	74.0	54.0	23.9	15.3
4960	48.39	37.75	H	2.40	50.79	40.15	74.0	54.0	23.2	13.9
7440	47.05	35.71	V	7.77	54.82	43.48	74.0	54.0	19.2	10.5

* Note: All emissions above 7440 MHz were attenuated below the permissible limit.

7.5.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

R_U = Uncorrected Reading

R_C = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $51.14 - 5.46 = 45.68\text{dBuV}$

Margin: $74\text{dBuV} - 45.68\text{dBuV} = 28.3\text{dB}$

Example Calculation: Average

Corrected Level: $40.11 - 5.46 - 0 = 34.65\text{dBuV}$

Margin: $54\text{dBuV} - 34.65\text{dBuV} = 19.3\text{dB}$

8 CONCLUSION

In the opinion of ACS, Inc. the N2-PA/PK, manufactured by Assa Abloy meet the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

END REPORT